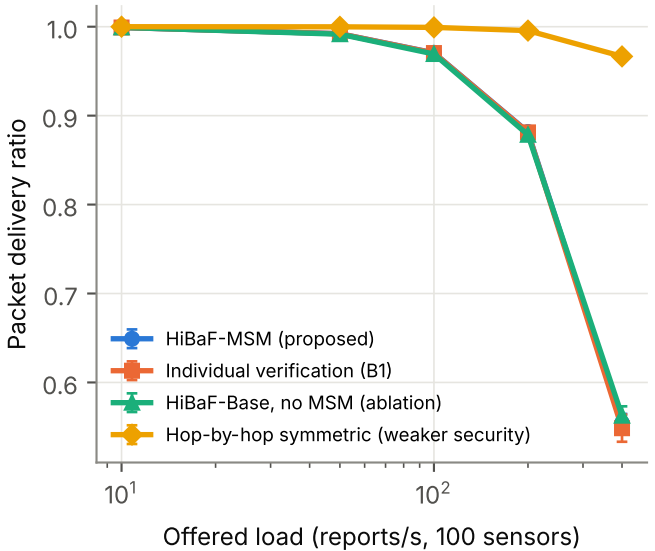
Packet delivery ratio
1.0
0.9
0.8
0.7
0.6
HiBaF-MSM (proposed)
Individual verification (B1)
HiBaF-Base, no MSM (ablation)
Hop-by-hop symmetric (weaker security)
10^1
10^2
Offered load (reports/s, 100 sensors)

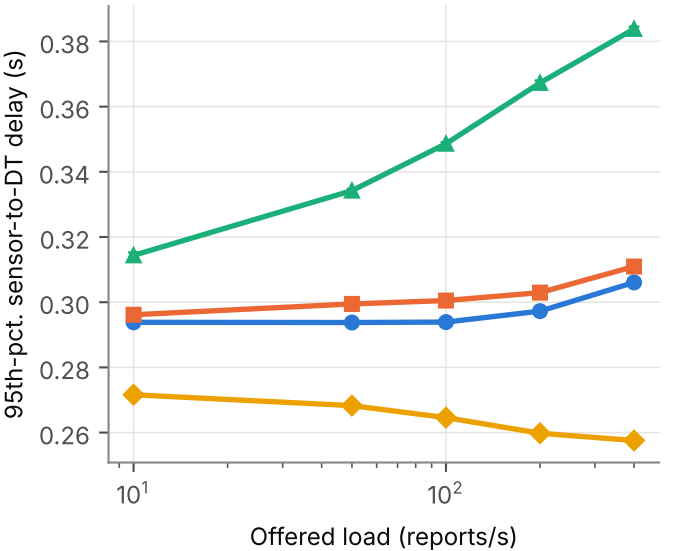
95th-pct. sensor-to-DT delay (s)
0.38
0.36
0.34
0.32
0.30
0.28
0.26
10^1
10^2
Offered load (reports/s)