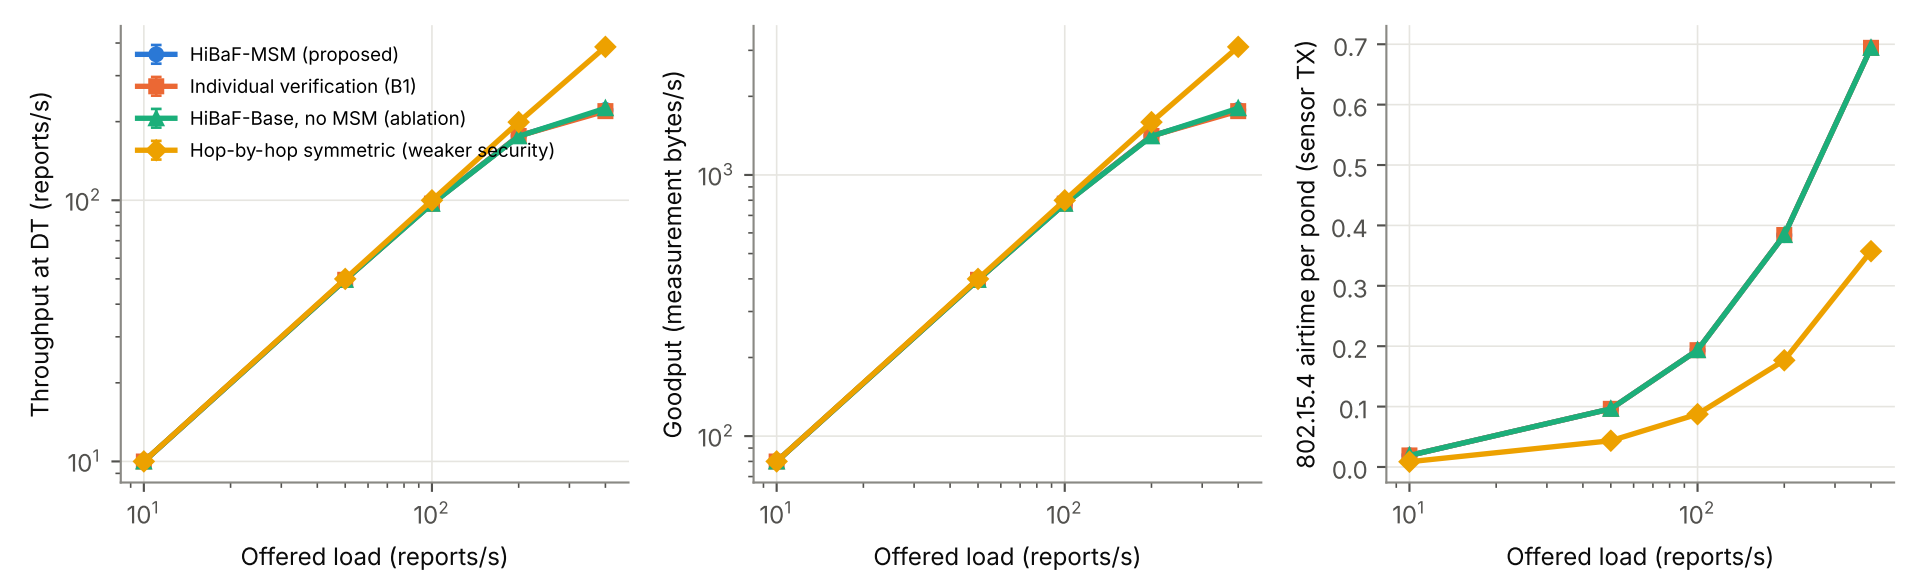
HiBaF-MSM (proposed)
Individual verification (B1)
HiBaF-Base, no MSM (ablation)
Hop-by-hop symmetric (weaker security)
Throughput at DT (reports/s)
Offered load (reports/s)
Goodput (measurement bytes/s)
Offered load (reports/s)
802.15.4 airtime per pond (sensor TX)
Offered load (reports/s)