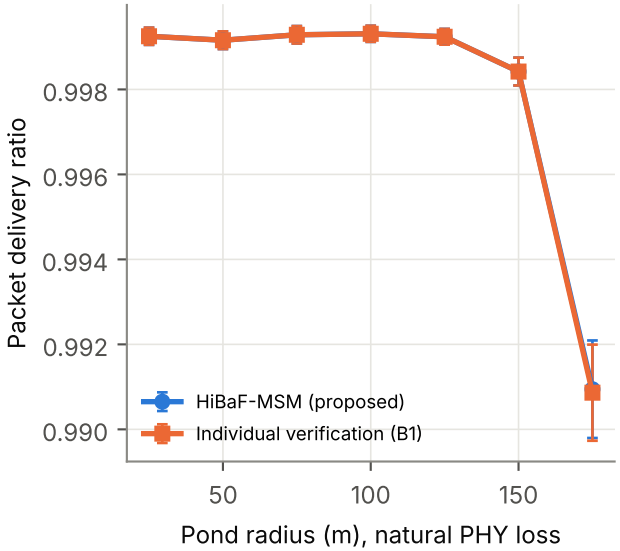
Packet delivery ratio
0.998
0.996
0.994
0.992
0.990
HiBaF-MSM (proposed)
Individual verification (B1)
50
100
150
Pond radius (m), natural PHY loss

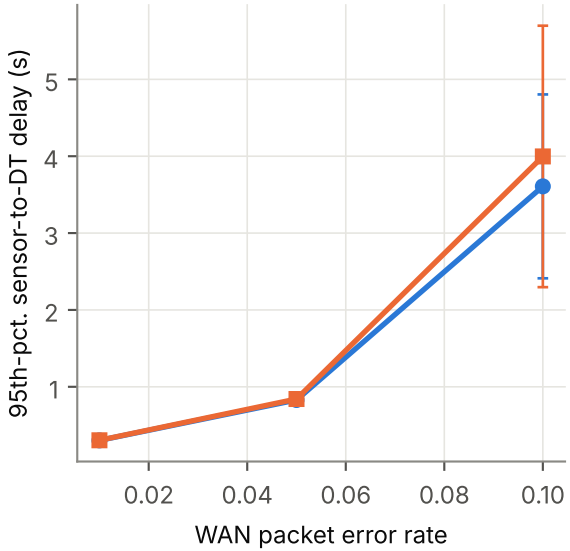
95th-pct. sensor-to-DT delay (s)
5
4
3
2
1
0.02
0.04
0.06
0.08
0.10
WAN packet error rate

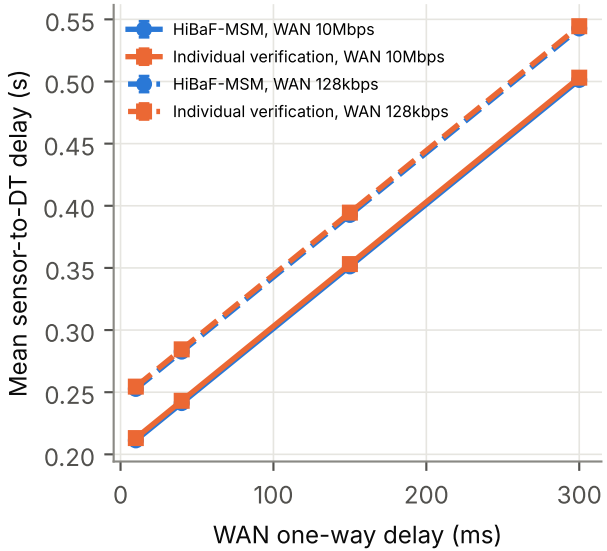
Mean sensor-to-DT delay (s)
0.55
0.50
0.45
0.40
0.35
0.30
0.25
0.20
HiBaF-MSM, WAN 10Mbps
Individual verification, WAN 10Mbps
HiBaF-MSM, WAN 128kbps
Individual verification, WAN 128kbps
0
100
200
300
WAN one-way delay (ms)