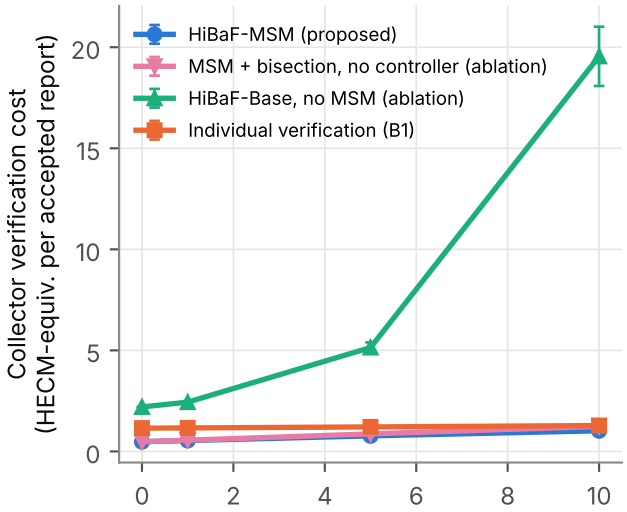
HiBaF-MSM (proposed)
MSM + bisection, no controller (ablation)
HiBaF-Base, no MSM (ablation)
Individual verification (B1)
Collector verification cost
(HECM-equiv. per accepted report)
0
5
10
15
20
0
2
4
6
8
10
Compromised sensors (of 100), 2 invalid reports/s each

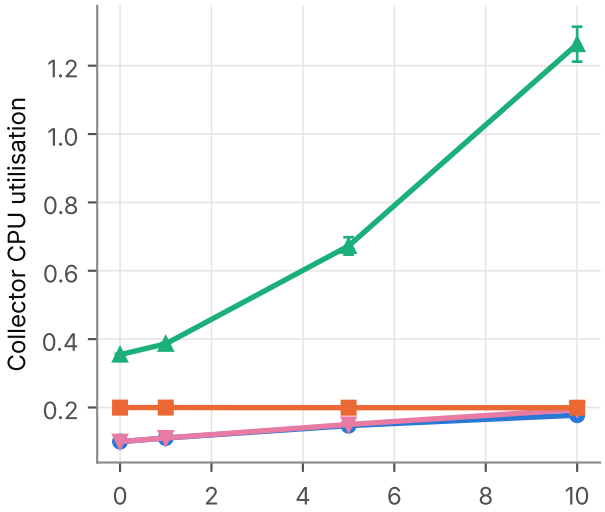
Collector CPU utilisation
0.2
0.4
0.6
0.8
1.0
1.2
0
2
4
6
8
10
Compromised sensors

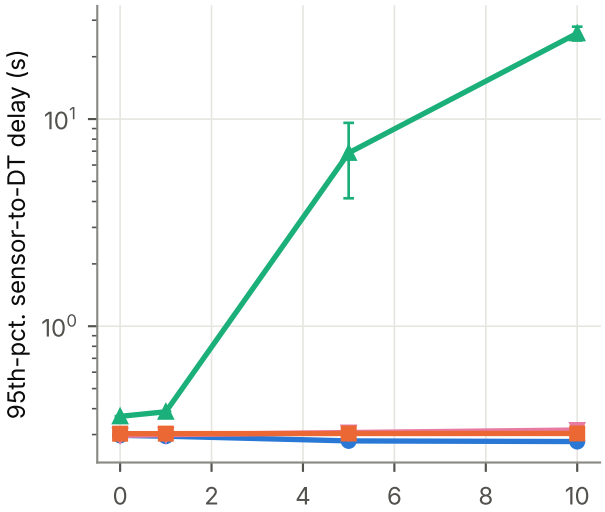
95th-pct. sensor-to-DT delay (s)
10^0
10^1
0
2
4
6
8
10
Compromised sensors