

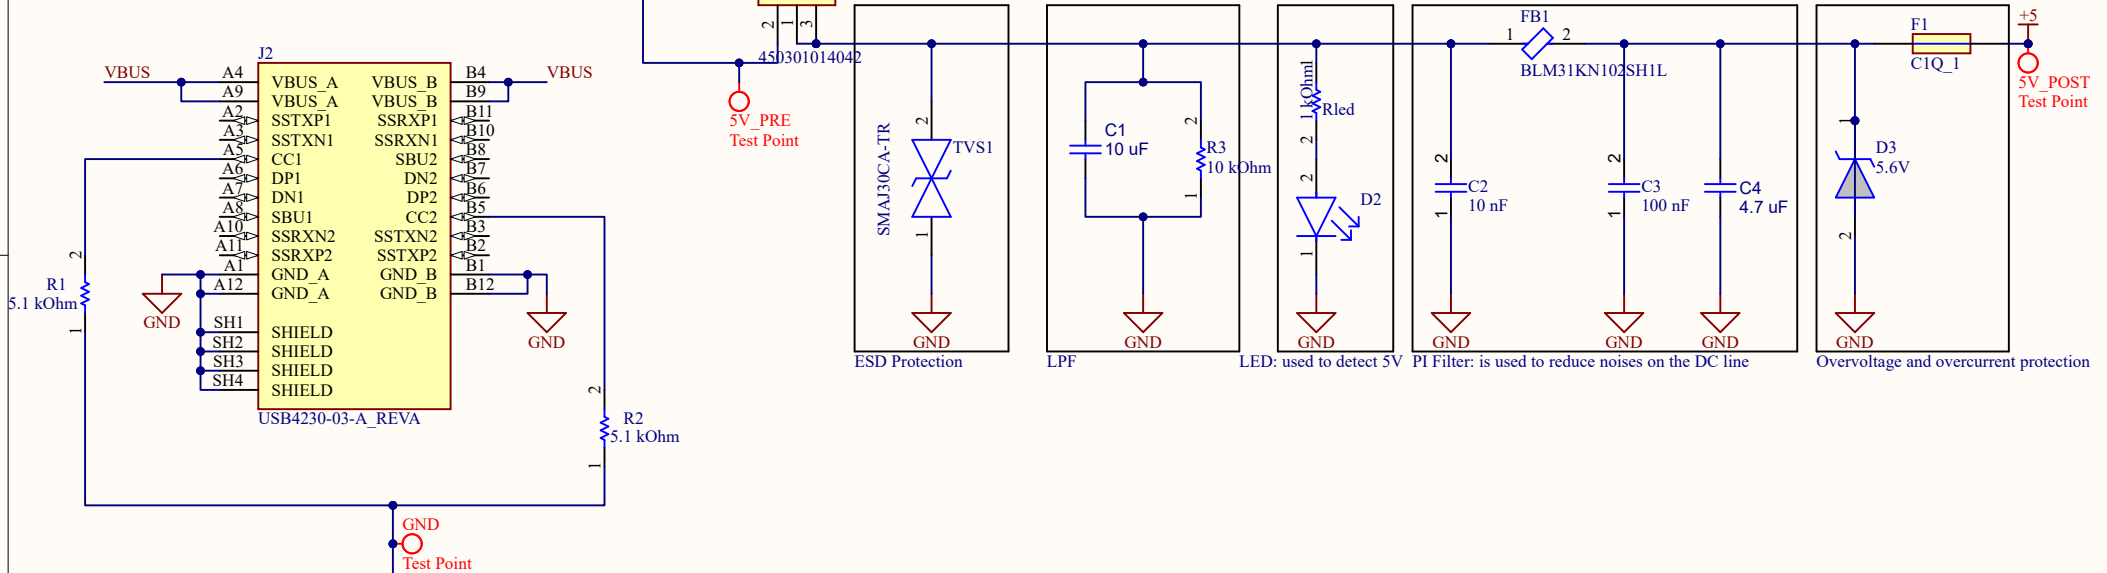
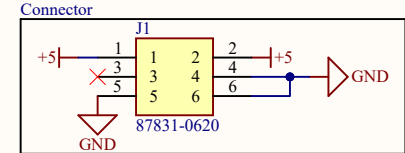


R1 and R2 are used as pull-down resistances for the CC1 and CC2 channel. Doing this blocks the circuit to 5V 3A (15W) of maximum power. The source connected to the port senses the 2 resistors and allows for only standard usb-c current and voltage ratings



This circuit uses usb 3.1 to draw up to 15W (5V, 3A) of power into the board. No negotiation chip is needed because the usb 3.1 standard easily allows to draw this power without the need of a power delivery solution

Title			PSU_USB	
Size	A4	Number	Revision	
Date:		5/01/2026	Sheet of	V1
File:		C:\Users\Luigi\PSU_USB v1.SchDoc	Drawn By: Luigi Flaccio	