
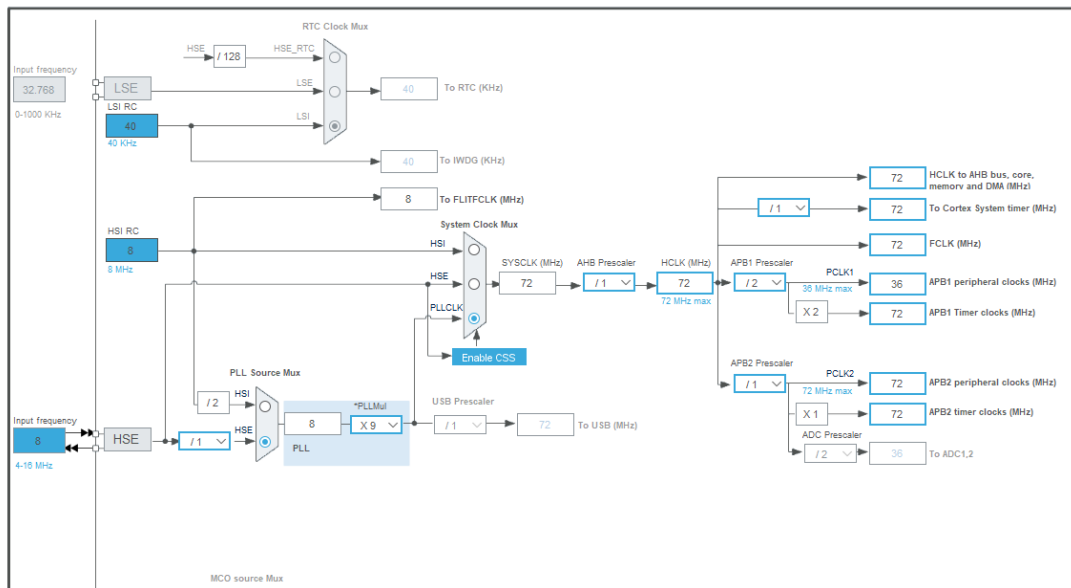


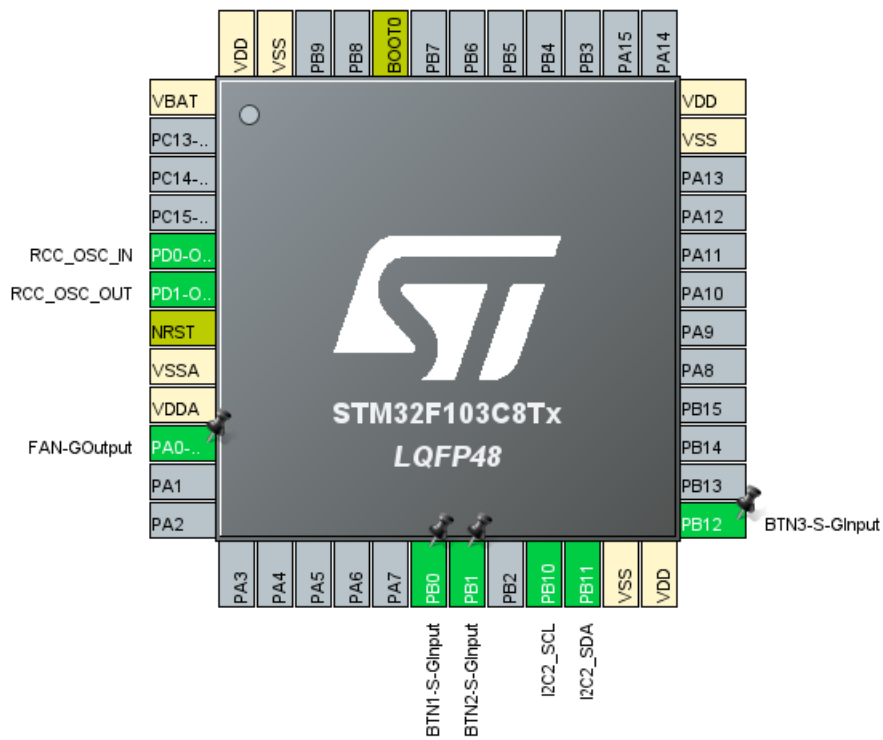

GPIO I2C RCC

Search Signals

Search (Ctrl+F)

☐ Show only Modified Pins

Pin Name	Signal on Pin	GPIO outp...	GPIO mode	GPIO Pull...	Maximum ...	User Label	Modified
PA0-WKUP	n/a	Low	Output Pu...	No pull-up ...	Low	FAN-GOut...	✓
PB0	n/a	n/a	Input mode	Pull-up	n/a	BTN1-S-GI...	✓
PB1	n/a	n/a	Input mode	Pull-up	n/a	BTN2-S-GI...	✓
PB12	n/a	n/a	Input mode	Pull-up	n/a	BTN3-S-GI...	✓

Group By Peripherals

GPIO

I2C

RCC

Search Signals

Search (Ctrl+F)

☐ Show only Modified Pins

Pin Name	Signal on Pin	GPIO outp...	GPIO mode	GPIO Pull-...	Maximum ...	User Label	Modified
PB10	I2C2_SCL	n/a	Alternate F...	n/a	High		☐
PB11	I2C2_SDA	n/a	Alternate F...	n/a	High		☐

RCC Mode and Configuration

Mode

High Speed Clock (HSE)

Crystal/Ceramic Resonator

Low Speed Clock (LSE)

Disable

☐ Master Clock Output

Configuration

Reset Configuration

Parameter Settings

User Constants

NVIC Settings

GPIO Settings

Configure the below parameters :

Search (Ctrl+F)

System Parameters

VDD voltage (V)

3.3 V

Prefetch Buffer

Enabled

Flash Latency(WS)

2 WS (3 CPU cycle)

RCC Parameters

HSI Calibration Value

16

HSE Startup Timeout Value (ms)

100

LSE Startup Timeout Value (ms)

5000

Mode

Slave Mode

Disable

Trigger Source

Disable

☒ Internal Clock

Channel1

Disable

Channel2

Disable

Channel3

Disable

Channel4

Disable

Combined Channels

Disable

☐ XOR activation

☐ One Pulse Mode

Configuration

Reset Configuration

Parameter Settings

User Constants

NVIC Settings

DMA Settings

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
TIM3 global interrupt	☒	0	0

Configuration

Reset Configuration

Parameter Settings

User Constants

NVIC Settings

DMA Settings

Configure the below parameters :

Search (Ctrl+F)

⏪

⏩

i

Counter Settings

Prescaler (PSC - 16 bits value)

7199

Counter Mode

Up

Counter Period (AutoReload Register - 1...

4999

Internal Clock Division (CKD)

No Division

auto-reload preload

Disable

Trigger Output (TRGO) Parameters

Master/Slave Mode (MSM bit)

Disable (Trigger input effect not delayed)

Trigger Event Selection

Reset (UG bit from TIMx_EGR)

Mode

I2C I2C

Configuration

Reset Configuration

✓ NVIC Settings

✓ DMA Settings

✓ GPIO Settings

✓ Parameter Settings

✓ User Constants

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
I2C2 event interrupt	☒	0	0
I2C2 error interrupt	☒	0	0