TREETINO

EUROPEAN PATENT EP 4 664 750 A1
HI-TECH EDITION 2026 · CZECH REPUBLIC

TREETINO ENERGY ARCHITECTURE

TREE-INSPIRED HYBRID ENERGY & E-MOBILITY HUB

TECHNICAL DATABOOK

Where cutting-edge industrial engineering meets architectural hi-tech luxury. Complete technical specifications of hybrid solar-wind trees **Treetino V1 Commercial**, **Treetino V2 Scaled**, vertical wind turbines **Treetino Aero**, and EV charging infrastructure.



PEAK OUTPUT
49.8 KW
24/7 SOLAR + WIND
+ 22 KW EV HUB

RESEARCH & R&D
FZU & CTU Prague
Czech engineering & production

SOLAR TRACKING
+29% Efficiency
German precision servomotors

POWER & EV HUB
Victron + 22 kW EV
Dutch power control units

ROI & SUBSIDIES
Up to 90% Grants
ROI 2.5–4.5 yrs · EU funds

TREETINO CORP S.R.O. · Reg. ID: 10800107 · VAT: CZ10800107
+420 730 587 857 · info@treetino.com · www.treetino.eu

CATALOGUE STRUCTURE

TABLE OF CONTENTS // DIRECTORY

Overview of model series, technical datasheets, EV charging hubs, and the complete Treetino hardware & software ecosystem.

01 TECHNOLOGY INTRODUCTION, MARKET SEGMENTS & PORTFOLIO — PAGES 03 – 04
Patented architecture EP 4 664 750 A1 · Overview of V1, V2 Scaled & Aero product lines · Brand vision

02 TREE V1 COMMERCIAL (BIG TREE) — B2B FLAGSHIP [49.8 kW (16-50 kW)] — PAGES 05 – 06
Visual overview with EV charging hub · Complete electrical & mechanical Datasheet (PV 13.8 kWp + Wind 36 kW)

03 TREE V2 SCALED (SMALL TREE) — RESIDENTIAL & B2C [6 – 12 kW] — PAGES 07 – 08
Compact 5m architecture for luxury villas, resorts & boutique HQs · Technical Datasheet (PV 5.61 kW + Wind 6 kW)

04 TREETINO AERO — VERTICAL WIND TURBINE [1.0 / 1.5 / 3.0 kW] — PAGES 09 – 10
Silent droplet turbine (< 35 dB) for rooftops, parapets & EV colonnades · Technical Datasheet for 3 power ratings

05 HARDWARE & SOFTWARE ADD-ONS — PAGES 11 – 12
TreeApp & AI connectivity · 22 kW EV charging stations · E-bike & scooter charging racks · EU/CZ energy sharing grid



CORPORATE HQ & E-MOBILITY HUB · 24/7 HYBRID GENERATION

Monumental clean energy landmark for industrial parks, logistics centers, and corporate EV fleets

FOOTPRINT ONLY 1 m² · DELIVERY < 2-3 MONTHS

TREETINO V1 COMMERCIAL · VIP EV CHARGING HUB

13.8 kWp SOLAR + 36 kW WIND + 22 kW EV



DESIGN MEETS HIGH-VOLTAGE ENGINEERING

ENERGY THAT DOES NOT HIDE. ENERGY THAT MAKES A STATEMENT.

Combining bionically shaped photovoltaic leaves with vertical wind turbines and EV charging pedestals creates an unmistakable landmark of modern sustainability and 24/7 energy independence right in front of your corporate headquarters.

01 // INDUSTRY & MANUFACTURING

24/7 SOLAR + WIND

Ideal for manufacturing plants with full rooftop solar. The synergy of dual-axis solar tracking (+29%) and wind effectively shaves costly 15-minute peak loads and night consumption.

02 // CORPORATE HQ & LOGISTICS

BIOPHILIC LANDMARK + EV HUB

A prestigious architectural centerpiece at the main entrance featuring an integrated 22 kW EV charging hub for staff, executives, and VIP guests on a 1 m² base footprint.

03 // SMART CITIES & CAMPUSES

SMART CITY & UP TO 90% GRANTS

Ultra-quiet operation (< 35 dB), smart e-bike and EV charging on public squares and university campuses with up to 90% EU grant support and rapid ground-screw installation.

TREETINO CORP S.R.O. · EP 4 664 750 A1
Vlčetín 62, Bílá, 463 43, CZ · Reg. ID: 10800107 · VAT: CZ10800107

info@treetino.eu · +420 730 587 857 · www.treetino.eu


CHAPTER 01 · TREETINO PHILOSOPHY

TREETINO: WHERE BESPOKE HI-TECH DESIGN MEETS CLEAN ENERGY

Traditional renewable energy sources share one fundamental flaw — they are purely utilitarian.

Conventional rooftop solar panels or industrial wind turbines often disrupt building architecture and the surrounding landscape. At Treetino, we decided to change that.

We merged robust industrial engineering (European Patent **EP 4 664 750 A1**) with organic bionic design to pioneer an entirely new category of power generation. We craft smart, whisper-quiet (< 35 dB), and architecturally breathtaking systems that generate clean power 24/7, charge electric vehicles, and stand as iconic sculptures.

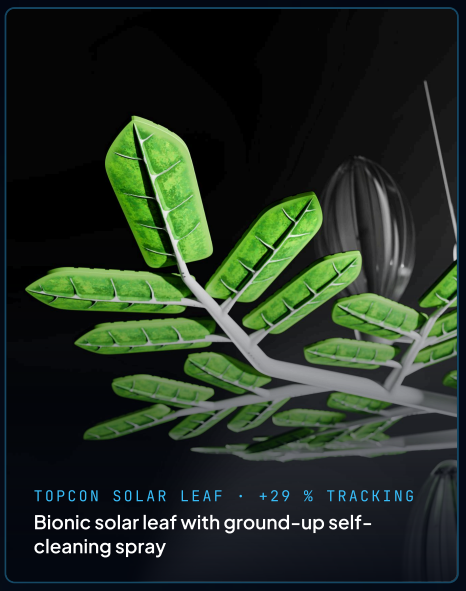


TOPCON SOLAR LEAF · +29 % TRACKING

Bionic solar leaf with ground-up self-cleaning spray

OUR PRODUCT PORTFOLIO

HIGH-VOLTAGE ARCHITECTURE · 3 BESPOKE FORMATS

At the core of our solution is total flexibility and cutting-edge high-voltage engineering with direct EV charging integration, available in three distinct architectural formats:



1. TREETINO V1 — FLAGSHIP (COMMERCIAL)

OUTPUT 49.8 kW · HEIGHT 11.5 m · 1 m² FOOTPRINT

Our largest and most powerful flagship model. A monumental architectural structure delivering nearly 50 kW (13.8 kWp solar + 36 kW wind), combining hundreds of photovoltaic leaves, silent vertical turbines, and 22 kW EV charging hubs. Engineered for business centers, industrial parks, logistics hubs, and public squares.



2. TREETINO V2 SCALED (COMPACT)

OUTPUT 6 – 12 kW · HEIGHT 5.0 m · 0.5 m² FOOTPRINT

The compact, 5-meter-tall sibling of our flagship delivering up to 12 kW at under 35 dB noise level. Proportioned specifically for luxury private villas, residential EV charging driveways, boutique hotels, golf resorts, and executive offices.



3. TREETINO AERO (MODULAR VERTICAL WIND TURBINE)

OUTPUT 1.0 / 1.5 / 3.0 kW · POLE & ROOFTOP VTE

For clients seeking pure wind power without the full tree structure, we offer our vertical droplet turbines as a standalone product (1.0 to 3.0 kW). Whisper-quiet, bird-safe, and aerodynamically sculpted to complement commercial rooftops, parking garages, and EV charging colonnades.

"OUR VISION IS CLEAR: THE CLEAN ENERGY OF THE FUTURE NO LONGER NEEDS TO HIDE. IT MUST BE SEEN, IT MUST BE SMART, AND IT MUST INSPIRE."

TECHNICAL DATA SHEET · FLAGSHIP COMMERCIAL SERIES

TREE V1 (BIG TREE) B2B

Monumental hybrid solar-wind power plant featuring solar-tracking branches, vertical turbines, and an EV charging hub

TOTAL INSTALLED CAPACITY
49.8 KW

PILLAR 01 // CZECH R&D & MANUFACTURING [CZ/EU]

EUROPEAN ENGINEERING & QUALITY GUARANTEE

Developed in collaboration with leading Czech research institutions **FZU (Institute of Physics of the Czech Academy of Sciences)** and **CTU in Prague (ČVUT)**. Full mechanical fabrication and assembly take place in the Czech Republic.

PILLAR 02 // SUBSIDIES & ESG FINANCING [ROI 2.5–4.5 YRS]

GRANTS & SUBSIDIES UP TO 90%

Our systems qualify for national and European Union subsidy programs supporting renewable energy and innovative e-mobility infrastructure — covering up to **90% of eligible investment costs**.



SOLAR CANOPY (PV)

13.8 kWp

TopCon bionic leaves · +29% yield via branch tracking

WIND CANOPY (VTE)

36.0 kW

Vertical turbines (3 kW) · Cut-in at 1.8 m/s · < 35 dB

PILLAR 03 // TIER-1 EUROPEAN COMPONENTS [VICTRON + TOPCON]

PREMIUM MATERIALS & TIER-1 COMPONENTS

Built exclusively from Tier-1 European components — ranging from **custom Czech PV modules** and precision **German tracking servomotors** to **Dutch Victron Energy power management**.

PILLAR 04 // GLOBAL LEADERSHIP [22 kW EV HUB]

WORLD'S MOST POWERFUL ARCHITECTURAL POWER PLANT

In the architectural energy sector, we lead globally in both peak output and ROI. We combine nearly 50 kW of hybrid power with direct corporate EV charging on a 1 m² base footprint.

TREETINO CORP S.R.O. · EP 4 664 750 A1
Vlčetín 62, Bílá, 463 43, CZ · Reg. ID: 10800107 · VAT: CZ10800107

info@treetino.eu · +420 730 587 857 · www.treetino.eu

TREETINO

TOTAL OUTPUT: 49.8 kW

PRODUCT CONFIGURATION

OPTIONS

Standard Configuration:
White trunk · Spring green leaves · Standard PV finish · Transparent VTE

Bespoke Optional Upgrades:

- 3 structure colors + custom RAL
- 3 leaf colors + custom finish
- 3 PV leaf surface designs + custom
- 3 VTE turbine colors + custom

CERTIFICATION

STANDARDS

- ČSN EN 1991-1-4
- ČSN EN 61400-2
- ČSN EN 1993-1-1
- ČSN EN 62305
- ČSN 33 1500
- ČSN 33 2000-6
- ČSN EN 61215
- ČSN EN 61730

WARRANTIES


COVERAGE

- **Structure:** Steel skeleton (trunk & internal branch tubes): **15 years** · Exterior cladding: **5 years**
- **PV System:** Product workmanship warranty: **12 years** · Linear power warranty: **25 years (85%)**
- **Wind & Tracking:** Wind turbines (VTE), positioning mechanics, control units & sensors: **2 years**
- **Power Electronics:** Victron Energy inverters & cabling: **5 years**

TECHNICAL SKETCH

BLUEPRINT

HEIGHT: 11.5 m · BASE Ø 1.0 m

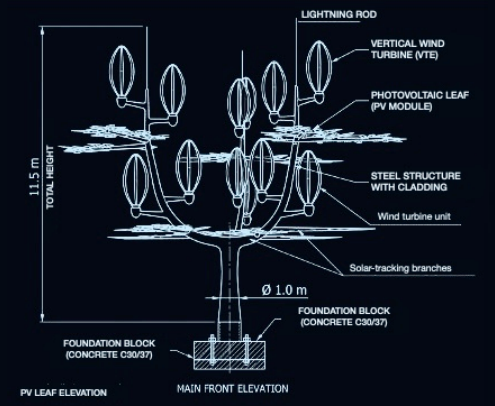

TEMPERATURE CHAR.

THERMAL SPECS

NMOT Operating Temp.	41 °C ±3 °C max
Temp. Coefficient (Pmax)	-0.35 %/°C
Temp. Coefficient (Voc)	-0.27 %/°C
Temp. Coefficient (Isc)	+0.05 %/°C

ELECTRICAL & TECHNICAL CHARACTERISTICS AT STC

ELECTRICAL & TECHNICAL DATA

PARAMETER / SPECIFICATION	UNIT	PV (SOLAR CANOPY)	VTE (WIND CANOPY)
Nom. Max. Power (Pmax) Nominal Maximum Power	[kWp]	13.8 kWp	36.0 kW
Max. Power Voltage (Vmp) Maximum Power Voltage	[V]	720 V (60 leaves × 12 V)	192 V (4 turbines × 48 V)
Max. Power Current (Imp) Maximum Power Current	[A]	19.15 A (5 circuits × 3.83 A)	187.50 A (3 circuits × 62.50 A)
Open Circuit Voltage (Voc) Open Circuit Voltage	[V]	870 V (60 leaves × 14.5 V)	232 V (4 turbines × 58 V)
Short Circuit Current (Isc) Short Circuit Current	[A]	21.00 A (5 circuits × 4.20 A)	206.25 A (3 circuits × 68.75 A)
Module Efficiency (ηm) Module / System Efficiency	[%]	20.2 %	20.5 %
Max. System Voltage DC* Maximum DC System Voltage	[V]	1000 / 1500 V	
Max. Series Fuse Rating Maximum Series Fuse Rating	[A]	23 A	
Power Sorting / Tolerance Pmpp Positive Power Tolerance	[Wp]	-0 / +5 Wp	

* 1000 V maximum series connection is highly recommended due to environmental conditions such as low-temperature operation or irradiance exceeding 1000 W/m² per IEC 61370 Part 5. Operation at 1500 V requires written manufacturer approval.

MECHANICAL — PV LEAF

SOLAR LEAF

Leaf Dimensions*	830 × 340 mm
Weight**	1.8 kg
Solar Cells	TopCon
Front Glass	3.2 mm (0.125")
Tracking Gain	+ 29 %
Encapsulant	EVA transparent

MECHANICAL — VTE

WIND TURBINE

Dimensions (H / Ø)*	2.8 m / 1.4 m
Weight**	73 kg
Generator / Power	3.0 kW
Cut-in Wind Speed	1.8 m/s
Rated Wind Speed	13.8 m/s
Turbine Efficiency	21 %

DEPLOYMENT SPEED


Turnkey Lead Time

3 MONTHS

From site handover to commissioning

PERFORMANCE GRAPH (I-V / P-V CURVE)

STC CURVE

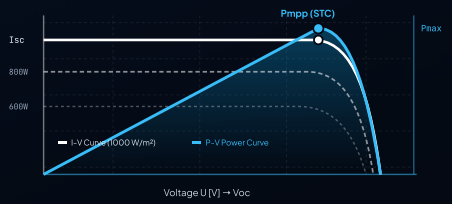

* All dimensions in the table and technical drawings carry a tolerance of ± 2.5 mm (± 1/8"). ** Weight tolerance is ± 1% with standard 290 mm UV-resistant cabling (custom lengths available on request). 1) Specific certifications applicable to different module types and regional markets may vary; please contact a Treetino corp s.r.o. representative for project-specific compliance. 2) First-year PV power degradation is approx. 2%, with subsequent annual degradation not exceeding 0.55%. 3) Standard Test Conditions (STC): Irradiance 1000 W/m², Air Mass AM = 1.5, Cell Temperature 25 °C. 4) Measurement tolerances per IEC 61215:2021: Pmax = ±3%, Voc = ±3%, Isc = ±5%. 5) PV modules are sorted by positive power tolerance. Technical specifications are subject to change without prior notice.

TREETINO CORP S.R.O. · EP 4 664 750 A1
Vlčetín 62, Bílá, 463 43, CZ · Reg. ID: 10800107 · VAT: CZ10800107

info@treetino.eu · +420 730 587 857 · www.treetino.eu

TREETINO

TECHNICAL DATA SHEET · EXECUTIVE & RESIDENTIAL SERIES

TREE V2 (SMALL TREE) B2C

Compact 5m hybrid solar-wind jewel for luxury residences, private villas, EV driveways, boutique hotels, and corporate HQs

INSTALLED CAPACITY
6 – 12 kW



PILLAR 01 // CZECH R&D & MANUFACTURING [FZU & CTU Prague]

EUROPEAN ENGINEERING & QUALITY GUARANTEE

Developed in partnership with leading Czech universities **FZU** and **CTU (ČVUT)**. Manufactured and assembled in the Czech Republic with watchmaker precision and whisper-quiet operation (< 35 dB).

PILLAR 02 // GRANT SUPPORT [UP TO 90%]

GRANTS & SUBSIDIES UP TO 90%

Eligible for national and EU green energy subsidy programs for smart grids, municipalities, businesses, and residential properties — up to **90% coverage**.

PILLAR 03 // COMPONENTS [EU QUALITY]

PREMIUM MATERIALS & TIER-1 COMPONENTS

Constructed exclusively from premium European components, combining **Czech TopCon PV leaves**, **German servomotors**, and **Dutch Victron Energy** power electronics.

PILLAR 04 // UNMATCHED RETURN ON INVESTMENT [BESPOKE V2]

WORLD'S MOST POWERFUL ARCHITECTURAL POWER PLANT

Global leader in architectural energy output and payback speed. Tree V2 Scaled brings clean 24/7 solar and wind power directly to the driveway of your private villa or residence.

TREETINO CORP S.R.O. · EP 4 664 750 A1
Vlčetín 62, Bílá, 463 43, CZ · Reg. ID: 10800107 · VAT: CZ10800107

info@treetino.eu · +420 730 587 857 · www.treetino.eu

PRODUCT CONFIGURATION

OPTIONS

Standard Configuration:
White trunk · Spring green leaves · Standard PV finish (5.61 kWp)

Bespoke Optional Upgrades:

- 3 structure colors + custom RAL
- 3 leaf colors + custom finish
- 3 PV leaf surface designs + custom
- 3 VTE turbine colors + custom
- **6 vertical wind turbines (+6 kW VTE)**
- Choice of 2 additional canopy designs

CERTIFICATION

STANDARDS

- ČSN EN 1991-1-4
- ČSN EN 61400-2
- ČSN EN 1993-1-1
- ČSN EN 62305
- ČSN 33 1500
- ČSN 33 2000-6
- ČSN EN 61215
- ČSN EN 61730


WARRANTIES

COVERAGE

- **Structure:** Steel skeleton (trunk & internal branch tubes): **15 years** · Exterior cladding: **5 years**
- **PV System:** Product workmanship warranty: **12 years** · Linear power warranty: **25 years (85%)**
- **Wind & Tracking:** Wind turbines (VTE), positioning mechanics, control units & sensors: **2 years**
- **Power Electronics:** Victron Energy inverters & cabling: **5 years**

TECHNICAL SKETCH

DRAWING ST-101

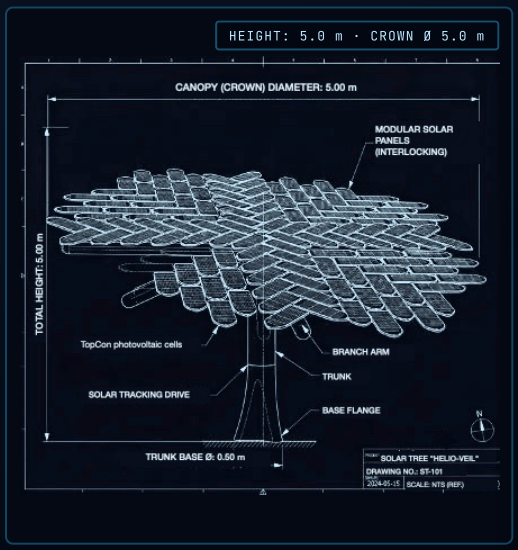

TEMPERATURE CHAR.

THERMAL SPECS

NMOT Operating Temp.	41 °C ±3 °C max
Temp. Coefficient (Pmax)	-0.35 %/°C
Temp. Coefficient (Voc)	-0.27 %/°C
Temp. Coefficient (Isc)	+0.05 %/°C

ELECTRICAL & TECHNICAL CHARACTERISTICS AT STC

ELECTRICAL & TECHNICAL DATA

PARAMETER / SPECIFICATION	UNIT	PV (SOLAR CANOPY)	VTE (WIND CANOPY)
Nom. Max. Power (Pmax) Nominal Maximum Power	[kWp]	5.61 kW	6.0 kW
Max. Power Voltage (Vmp) Maximum Power Voltage	[V]	732 V (61 leaves × 12 V)	288 V (6 turbines × 48 V)
Max. Power Current (Imp) Maximum Power Current	[A]	7.66 A (2 circuits × 3.83 A)	20.83 A
Open Circuit Voltage (Voc) Open Circuit Voltage	[V]	884.5 V (61 leaves × 14.5 V)	288 V
Short Circuit Current (Isc) Short Circuit Current	[A]	8.40 A (2 circuits × 4.20 A)	23.00 A
Module Efficiency (ηm) Module / System Efficiency	[%]	20.2 %	20.5 %
Max. System Voltage DC* Maximum DC System Voltage	[V]	1000 / 1500 V	
Max. Series Fuse Rating Maximum Series Fuse Rating	[A]	23 A	
Power Sorting / Tolerance Pmpp Positive Power Tolerance	[Wp]	-0 / +5 Wp	

* 1000 V maximum series connection is highly recommended due to environmental conditions such as low-temperature operation or irradiance exceeding 1000 W/m² per IEC 61370 Part 5. Operation at 1500 V requires written manufacturer approval.

MECHANICAL — PV LEAF

SOLAR LEAF

Leaf Dimensions*	830 × 340 mm
Weight**	1.8 kg
Solar Cells	TopCon
Front Glass	3.2 mm (0.125")
Tracking Gain	+ 29 %
Encapsulant	EVA transparent

MECHANICAL — VTE

WIND TURBINE

Dimensions (H / Ø)*	1.5 m / 1.0 m
Weight**	48 kg
Generator / Power	1.0 kW
Cut-in Wind Speed	1.8 m/s
Rated Wind Speed	13.8 m/s
Turbine Efficiency	21 %

DEPLOYMENT SPEED

Turnkey Lead Time


2

MONTHS

From site handover to commissioning

PERFORMANCE GRAPH (I-V / P-V CURVE)

STC CURVE

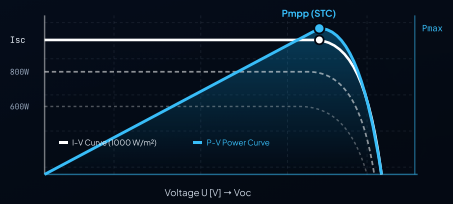

* All dimensions in the table and technical drawings carry a tolerance of ± 2.5 mm (± 1/8"). ** Weight tolerance is ± 1% with standard 290 mm UV-resistant cabling (custom lengths available on request). 1) Specific certifications applicable to different module types and regional markets may vary; please contact a Treetino corp s.r.o. representative for project-specific compliance. 2) First-year PV power degradation is approx. 2%, with subsequent annual degradation not exceeding 0.55%. 3) Standard Test Conditions (STC): Irradiance 1000 W/m², Air Mass AM = 1.5, Cell Temperature 25 °C. 4) Measurement tolerances per IEC 61215:2021: Pmax = ±3%, Voc = ±3%, Isc = ±5%. 5) PV modules are sorted by positive power tolerance. Technical specifications are subject to change without prior notice.

TREETINO CORP S.R.O. · EP 4 664 750 A1
Vlčetín 62, Bílá, 463 43, CZ · Reg. ID: 10800107 · VAT: CZ10800107

info@treetino.eu · +420 730 587 857 · www.treetino.eu

TREETINO

TECHNICAL DATA SHEET · AERODYNAMIC VERTICAL TURBINE

WIND TURBINE — TREETINO AERO

Standalone droplet-shaped vertical-axis wind turbine for commercial rooftops, parapets, industrial halls, and EV colonnades

POWER RATINGS
3.0 · 1.5 · 1.0
KW



PILLAR 01 // CZECH R&D & MANUFACTURING [FZU & CTU Prague]

EUROPEAN ENGINEERING & QUALITY GUARANTEE

Developed in cooperation with leading Czech technical universities **FZU** and **CTU (ČVUT)**. Full production and quality control in the Czech Republic.

PILLAR 02 // GRANT SUPPORT [UP TO 90%]

GRANTS & SUBSIDIES UP TO 90%

Eligible for national and European renewable wind, off-grid, and e-mobility subsidy programs — covering up to **90% of project costs**.

CUT-IN WIND SPEED

from 1.8 m/s

Immediate power generation even in gentle urban breeze

ACOUSTIC COMFORT < 35 dB

Silent & Bird-Safe

Zero structural vibration · Completely safe for birds

PILLAR 03 // EUROPEAN COMPONENTS [VICTRON ENERGY]

PREMIUM MATERIALS & TIER-1 COMPONENTS

Engineered from premium European components, from Czech aerodynamic stator/rotor blades to **Dutch Victron Energy** smart inverters and controllers.

PILLAR 04 // DESIGN & E-MOBILITY [24/7 CLUSTERS]

WORLD'S MOST POWERFUL ARCHITECTURAL POWER PLANT

Global leader in architectural energy performance. Treetino Aero enables scalable rooftop and pole-mounted clusters for continuous overnight EV fleet charging.

TREETINO CORP S.R.O. · EP 4 664 750 A1
Vlčetín 62, Bílá, 463 43, CZ · Reg. ID: 10800107 · VAT: CZ10800107

info@treetino.eu · +420 730 587 857 · www.treetino.eu

TREETINO

PRODUCT CONFIGURATION

OPTIONS

Available Power Ratings:

1.0 kW | 1.5 kW | 3.0 kW

Standard Configuration:

- 5m steel pole mounting structure
- Pure white turbine structure finish

Bespoke Optional Upgrades:

- 3 structure colors + custom RAL
- Rooftop structural anchoring kit
- Wall / facade cantilever mounting kit

CERTIFICATION

STANDARDS

- ČSN EN 1991-1-4
- ČSN EN 61400-2
- ČSN EN 1993-1-1
- ČSN EN 62305
- ČSN 33 1500
- ČSN 33 2000-6
- ČSN EN 61215
- ČSN EN 61730

WARRANTIES


COVERAGE

- **VTE Turbine:** Complete mechanical & generator assembly: **3 years**
- **Power Electronics:** Victron Energy inverters & cabling: **5 years**

TECHNICAL SKETCH

DRAWING WT-201

HEIGHT: 2.80 m · Ø 1.40 m

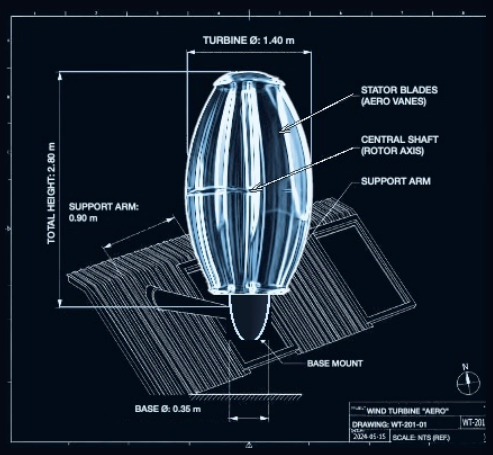

TEMPERATURE CHAR.

THERMAL SPECS

NMOT Operating Temp.	41 °C ±3 °C max
Temp. Coefficient (Pmax)	-0.35 %/°C
Temp. Coefficient (Voc)	-0.27 %/°C
Temp. Coefficient (Isc)	+0.05 %/°C

ELECTRICAL & TECHNICAL CHARACTERISTICS AT STC

VTE ELECTRICAL DATA (3 MODELS)

PARAMETER / SPECIFICATION	UNIT	AERO 1.0 KW	AERO 1.5 KW	AERO 3.0 KW
Nom. Max. Power (Pmax) Nominal Generator Output	[kW]	1.0 kW	1.5 kW	3.0 kW
Max. Power Voltage (Vmp) Maximum Power Voltage	[V]	48.0 V	48.0 V	48.0 V
Max. Power Current (Imp) Maximum Power Current	[A]	20.83 A	31.25 A	62.50 A
Open Circuit Voltage (Voc) Open Circuit Voltage	[V]	48.0 V	48.0 V	48.0 V
Short Circuit Current (Isc) Short Circuit Current	[A]	23.00 A	34.50 A	68.75 A
System Efficiency (ηm) Overall System Efficiency	[%]	20.5 %	20.5 %	20.5 %
Max. System Voltage DC* Maximum DC System Voltage	[V]	1000 / 1500 V		
Max. Series Fuse Rating Maximum Series Fuse Rating	[A]	23 A		
Power Sorting / Tolerance Pmpp Positive Power Tolerance	[Wp]	-0 / +5 Wp		

* 1000 V maximum series connection is highly recommended due to environmental conditions per IEC 61370 Part 5. Operation at 1500 V requires written manufacturer approval.

MECHANICAL — VTE AERO

3 MODEL SIZES

Dimensions (H / Ø)*	2.8 / 1.5 / 1.0 m
Weight**	73 / 48 / 36 kg
Generator / Power	3.0 / 1.5 / 1.0 kW
Cut-in Wind Speed	1.8 m/s
Rated Wind Speed	13.8 m/s
Efficiency	21 %

HYBRID PV MODULE

COMPATIBLE LEAF

Dimensions*	830 × 340 mm
Weight**	1.8 kg
Solar Cells	TopCon
Front Glass	3.2 mm
Tracking Gain	+ 29 %
Encapsulant	EVA transp.

DEPLOYMENT SPEED


Turnkey Lead Time

2 MONTHS

From site handover to commissioning

PERFORMANCE GRAPH (I-V / P-V CURVE)

SYSTEM CURVE

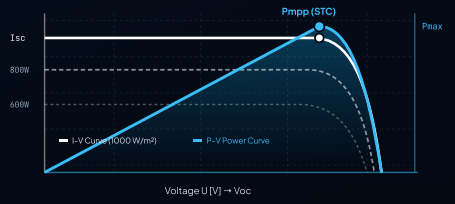

* All dimensions in the table and technical drawings carry a tolerance of ± 2.5 mm (± 1/8"). ** Weight tolerance is ± 1% with standard 290 mm UV-resistant cabling (custom lengths available on request). 1) Specific certifications applicable to different models and regional markets may vary; please contact a Treetino corp s.r.o. representative for project-specific compliance. 2) First-year power degradation is approx. 2%, with subsequent annual degradation not exceeding 0.55%. 3) Standard Test Conditions (STC): Irradiance 1000 W/m², Air Mass AM = 1.5, Temperature 25 °C. 4) Measurement tolerances per IEC 61215:2021: Pmax = ±3%, Voc = ±3%, Isc = ±5%. Technical specifications are subject to change without prior notice.

TREETINO CORP S.R.O. · EP 4 664 750 A1
Vlčetín 62, Bílá, 463 43, CZ · Reg. ID: 10800107 · VAT: CZ10800107

info@treetino.eu · +420 730 587 857 · www.treetino.eu

TREETINO

CHAPTER 05 · ECOSYSTEM & CONNECTIVITY

HARDWARE & SOFTWARE ADD-ONS

Transform your hybrid energy tree into an autonomous hub for smart e-mobility, AI yield optimization, and community energy sharing.

01 // SMART CONTROL & AI

IOS & ANDROID

TREEAPP & PREMIUM AI CONNECTIVITY



- **Real-time AI power optimization** & telemetry
- **Severe weather prediction** & automatic branch folding
- **Storm protection mode** & automated **ground-up spray cleaning**
- Programmable **ambient light show** & remote diagnostics

02 // E-MOBILITY HUB

22 kW AC / DC HUB

ELECTRIC VEHICLE (EV) CHARGING



- **Direct EV charging for employees**, VIP guests, and corporate fleets powered by the hybrid tree
- **Monetize surplus electricity** at peak rates via integrated payment & billing terminals
- Dynamic load balancing (22 kW AC / fast-charging hubs)

03 // URBAN MICROMOBILITY

E-BIKE RACK

E-BIKE & E-SCOOTER CHARGING RACKS




- **Charge e-bikes and e-scooters** directly from surplus clean energy
- **Seamless architectural harmony** with Treetino structures
- Ideal for city squares, cycling trails, university campuses, and modern office parks

04 // ENERGY GRID NETWORK

IN DEVELOPMENT

CROSS-BORDER ENERGY SHARING (CZ / EU)



- **National energy sharing** (community grid & multi-branch corporate balancing)
- **EU-wide energy sharing (in development)** — tokenization and cross-border balancing of generated green electricity via TreeApp

BESPOKE HYBRID ENERGY ARCHITECTURE · PATENT EP 4 664 750 A1

THE FUTURE OF ENERGY IS ROOTED IN SUSTAINABILITY.

Schedule a private consultation or a bespoke 3D visualization of a Treetino hybrid energy tree and EV charging hub tailored to your property.

TREETINO

TREE-INSPIRED HYBRID ENERGY SOLUTIONS

CORPORATE HEADQUARTERS // COMPANY

TREETINO CORP S.R.O.

Reg. ID (IČ): 10800107
VAT ID (DIČ): CZ10800107

Head Office:
Vlčetín 62, Bílá, 463 43
Czech Republic, European Union

DIRECT CONTACT // CONCIERGE

Tel.: +420 730 587 857
E-mail: info@treetino.com
E-mail EU: info@treetino.eu
Web: www.treetino.eu · app.treetino.com

Instagram / X: @treetino_corp
LinkedIn: Treetino

WWW.TREETINO.EU

© 2026 Treetino corp s.r.o. All rights reserved.

HI-TECH BLACK · BLUE · WHITE EDITION · CZECH REPUBLIC