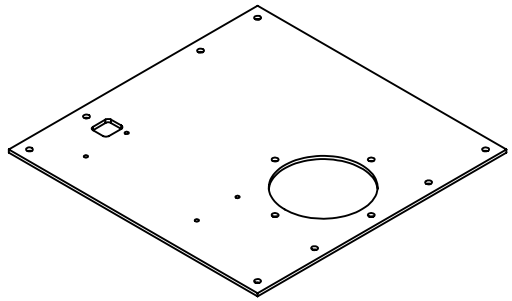

8X 0.217 / 0.227 THRU ⌖ ∅0.02 M A B C

4X 0.217 / 0.223 THRU ⌖ ∅0.02 M A B C

3.40 / 3.45 THRU ⌖ ∅0.01 M A B C

4X R0.125

4X ∅0.138 (M3 NORMAL CLEARANCE)

GENERAL NOTES:
1. OUTSIDE BOLT PATTERN CONSISTING OF (9) M5 HOLES, AND THE CIRCULAR BEARING PATTERN CONSISTING OF (4) M5 HOLES SHOULD BE DRILLED USING AN M5 NORMAL CLEARANCE DRILL BIT.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ±0.01 THREE PLACE DECIMAL ±0.05	DRAWN	TBE	2025-03-11
	CHECKED		
	ENG APPR.		
	MFG APPR.		
INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5-2018 (R2024)	Q.A.		
MATERIAL 6061 T6 ALUMINUM ALLOY	COMMENTS:		
FINISH			
DO NOT SCALE DRAWING			

TITLE:
TOP PLATFORM

SIZE	DWG. NO.	REV
A	ROV-111-PRT-001	B

SCALE: 1:3 | WEIGHT: 612 g | SHEET 1 OF 1

SOLIDWORKS Educational Product. For Instructional Use Only.