

Catalog 2023

Stock & Custom Springs



Century Spring



Order online
Download CAD drawings
CenturySpring.com

The largest selection
of springs, ever
NEW PARTS INSIDE



**Century Spring Corporation (CSC),
a location of MW Components, is
North America's leading catalog
source of stock and custom springs
for both MRO and OEM applications
in all industries.**

**Since 1927, Century has built a
tradition of success on exceptional
customer service, which includes:**

Largest Stock Spring Selection in the World Century Spring stocks more than 40,000 designs, with millions of springs in inventory for same day shipping on orders placed before 12:00 pm PST. (English and metric dimensions).

Custom Spring Manufacturing
Can't find what you need here? Century Spring can design and manufacture a spring for your application in any quantity, from prototype to full production volumes.

Superior Customer Service

We feature same-day shipping on stock items, with ordering assistance by phone, fax or online. Centuryspring.com features our full catalog with online ordering, helpful technical information and downloadable CAD drawings of our products.

Exacting Quality Standards

Century's products are manufactured in the USA, and we are ISO 9001:2015 certified and ITAR compliant. RoHS compliant product is available on request. Our QMS is also AS9100 Rev. D certified for aerospace applications.

 5959 Triumph St.,
Commerce CA 90040

 **Fax (orders or quotes):** 213.749.3802
Toll-free Fax: 800.474.4479

 **Phone:** 213.749.1466
Toll-free: 800.237.5225

Email: info@centuryspring.com
Website: centuryspring.com



Century Spring

Terms & Conditions

Terms and conditions

Current sales tax is 10% in Commerce, CA. California residents 7.25% plus appropriate tax for your district. Subject to change.

Important notice

Changes of costs in raw materials, plating, etc, require that all prices are subject to change without notice.

Shortages

Any shortages must be reported within 15 days, as is printed on invoice. We reserve the right to over or under ship within 10% of quantity ordered on all custom spring shipments.

Credit Application

To establish a net 30 day account, please email one bank reference and three U.S. Trade references with complete email contact and account numbers. Please provide an authorizing signature for your bank to release information to **Century Spring Corp.** All custom orders require 50% deposit for new and 100% deposit for international customers.

Credit Card Orders

We accept all major credit cards. When a credit card is provided upon purchase please note an authorization is made to hold pending charge for dollar amount to include parts, shipping and tax if applicable. A signed resale certificate must be provided for nontaxable orders. Unless one is provided upon purchase tax will apply.

Minimum Order

Minimum order \$50.00 for phone, fax, or email orders. Online orders under \$40.00 will incur a handling fee of \$15.00 per order.

Return of merchandise

No merchandise accepted for return 30 days after delivery date. No credit allowed on merchandise shipped as ordered and returned without obtaining a valid return authorization number with written authorization allowing parts to be returned. Absolutely no return allowed on custom-made springs. **A 20% restocking charge applies** to all returns of stock springs, and transportation charges must be fully prepaid. We will pay transportation charges on returned merchandise due to Century's error. We accept no responsibility for parts plated or otherwise treated by customer. Phone orders accepted at risk of buyer.

Packaging

Parts are bulk-packed. Due to physical characteristics, tangling can occur during transit on wire sizes under .035" (.89mm). Please inquire about special packaging and pricing when ordering.

Shipments

All merchandise is F.O.B. our plant, 5959 Triumph Street Commerce, CA 90040. Your order will be shipped via FedEx when possible. Outside the FedEx zones, shipment will be made freight collect according to our best judgment unless instructions accompany the order.

Regulatory Requirements and Compliance

Certifications

A Certificate of Compliance will be provided upon request at time of order for stock items contained in this catalog.

WE WARRANT, TO THE EXTENT OF THE PURCHASE PRICE, THAT SPRINGS SOLD ARE AS DESCRIBED IN THE CATALOG WITHIN RECOGNIZED SMI TOLERANCES. WE OFFER NO OTHER OR FURTHER WARRANTY, EXPRESSED OR IMPLIED.

Material certification (chemical or physical) is available only with custom manufactured orders, requested at time of order. For DFARS compliant parts, please ask for the Custom Manufacturing Division.

RoHS/REACH Compliant Product - Upon request, we can provide stock or custom springs that are compliant with RoHS/REACH regulations. Our salespeople will be happy to assist you in making your selection.

Century Spring considers our stock springs to be unaffected by the Occupational Safety and Health Administration's (OSHA) Hazard Communications Standards. If, however, your applied use of our zinc and cadmium-plated springs is thought to release questionable elements, we will provide related Material Safety Data Sheets (MSDS's) upon request.

Email Addresses

Customer Service & Sales	info@centuryspring.com
Custom Spring Mfg	customquote@centuryspring.com
Retailers (Hardware)	hw@centuryspring.com

Dedication to Complete Customer Satisfaction

In 1997, **Century Spring Corp.** joined with **MW Components** to become one of America's top spring and specialty fastener manufacturers. Having served the industry for over 93 years, we continue our commitment to providing only the highest quality service and parts in the industry. This allows us to provide you with the best, so you can be the best.

CSC will continue to lead the way in the spring industry by listening to you, our valuable customer, and providing you with what you need to be successful:

- The largest selection of springs in the world, including over 35,000 different designs available
- Shipment within 8 hours of order placement
- We stock or can custom manufacture any competitor's spring
- Efficient customer support
- Online ordering capability at centuryspring.com from the largest stock spring catalog ever published
- High quality standards including registration to ISO 9001:2015, material and finish certification on custom-made springs and Certification of Conformance to catalog listings
- Specialty divisions, including:

Custom Division: for parts not found in our stock inventory

Hardware Division: for spring assortments packaged for public resale

Garage Door Division: with springs and new or replacement hardware for one-piece and sectional overhead doors

We invite your inquiries, and look forward to helping you with all your spring needs. Your satisfaction will always be our **Number One** priority.

Table of Contents

	Terms & Conditions	1		Die Springs	459
	Regulatory Requirements and Compliance	1		Oil Tempered	461
				36" Lengths	462
				Chrome Alloy	463
				Chrome Silicon	469
	Technical FAQs	4		NEW! JIS Die Springs	475
	Custom Springs	10		NEW! ISO Metric	490
	Material Properties	12		NEW! Round Wire	498
	Hardware	14		Disc Springs	500
	SMI Materials	15		CDM Series	501
	Compression Springs	16		CDS Series	504
	Compression	19		SP Series	506
	NEW! Metric Compression	223		FL & MFL Series Flange	507
	NEW! 316 Stainless Steel			NDS Series Flange	508
	Compression	263		Springs For Ball Bearings	509
	NEW! Metric 316 Stainless Steel			Contact	510
	Compression	339		Serrated Contact	511
	Long Length - Stainless Steel	367		Curved	512
	Long Length - Carbon Steel	368		Wave	516
	Extension Springs	369		Reel Retrievers	519
	Extension	372		Constant Force Springs	519
	NEW! 316 Stainless Steel Extension	426		Stove Handles	520
	Long Length - Stainless Steel	433		Drawbar Springs	521
	Long Length - Carbon Steel	434		Urethane Springs	522
	Spring Anchors	435		Spring Assortments	534
	Torsion Springs	436		Specialty Springs	537
	Tapered Springs	451		Metric Conversions & Tensile Strength Tables	538
	Tapered	452		Glossary of Spring Terminology	541
	Constant Rate	457		Cross Reference Guide	542
				Lee Spring	542
				Associated Spring	560

Technical FAQs

01 What is free length?

For a compression spring, it is the length of the spring from one end to the other when no load is applied. For a tension spring, it is the

length between the inside diameter of the two end hooks when no load is applied.

02 What is the difference between closed and closed ground ends?

Springs can be coiled with a variety of end configurations. If the space between the coils is reduced to the point where the wire at the tip makes contact with the next coil, the end is said to be “closed”. If there is no reduction in pitch at the end coils, the end is referred to as “open”. Between these two extremes is an end type known as “semi-closed” in which the space between coils is reduced, but there is a gap between the tip and next coil. The most common configuration in industrial springs is closed ends.


An additional grinding operation may be applied to any of the end configurations listed above. Grinding removes material for the spring end coils to create a flat surface perpendicular to the spring axis. This may be done for a variety of reasons including more even distribution of the spring force to the working assembly and improved ease of

assembly since the spring is more likely to stand upright unassisted (particularly with smaller index springs).


Springs can be manufactured with any of the as-coiled configurations listed below. Any of these configurations can be provided either in the ground or unground condition.

Stock springs are listed in the catalog with specific ends (C = Closed, CG = Closed & Ground or O = Open). If you need a different type of end than what is listed, we can custom manufacture for you, see [page 10](#) for Custom Springs.


The figure below shows schematics of both open and closed ends in both the ground and unground conditions.

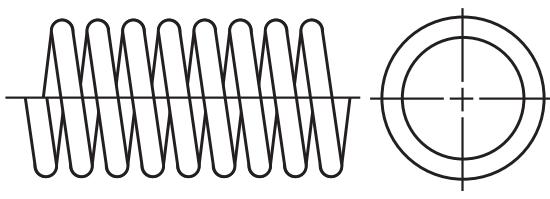


**Open Ends
Coiled Right-hand**

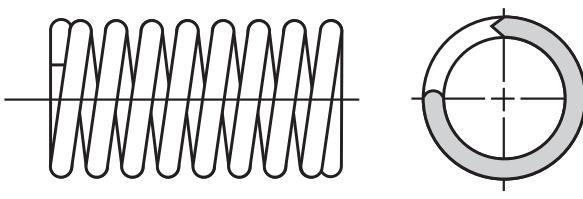

**Closed, Squared and Ground
Ends Coiled Left-hand**

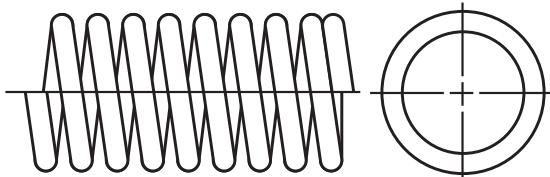

**Closed Ends Not Ground
Coiled Right-hand**

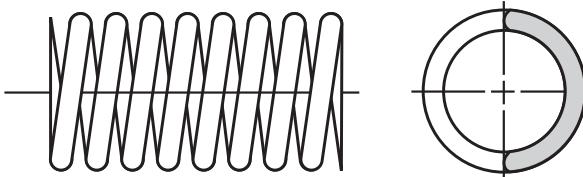

**Open Ends Ground Square
Coiled Left-hand**

03 What is spring rate?

Spring rate is the amount of force in lbs required to deflect a spring one inch. This property is measured in lbs/in (N/mm). The following formula can be utilized to calculate spring rate for compression springs based on known specifications:

$$R = (P/f) = ((Gd^4)) / (8D^3N_a)$$

R = Rate of Spring

P = Load

f = deflection

G = Modulus of rigidity of material


d = Wire diameter

D = Mean diameter

N_a = Number of active coils

04 What is initial tension?



Initial tension is most often discussed as it relates to extension spring. Extension springs are usually manufactured in a manner that requires a certain amount of force be applied before any deflection is realized. This minimum force is referred to as "initial tension". The load vs. deflection chart below shows the effect graphically. The load P_i is required to overcome the spring's initial tension. From that point, the spring force increases with deflection at the spring rate. See chart to the right.

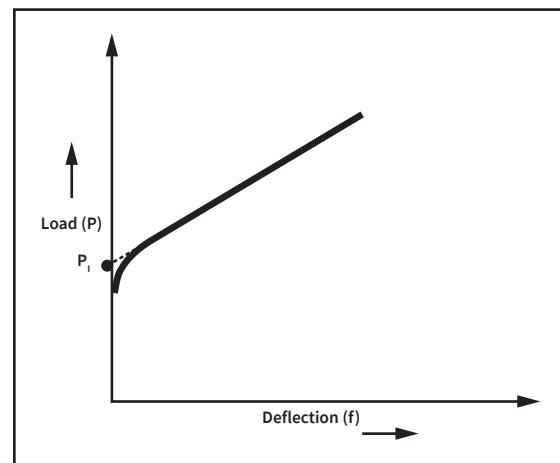

05 How do I know if a spring is RHW or LHW?

When looking along the axis of a spring, curl your index finger so that it follows the same direction as the wire from the spring body to the wire tip nearest you. If the end coil wraps in the same direction as

your index finger (picture below) then it is that hand (right or left). See illustration below for method and a Right Hand Wound spring. For additional instruction, see [page 437](#).

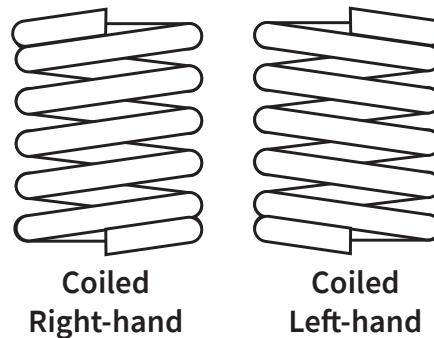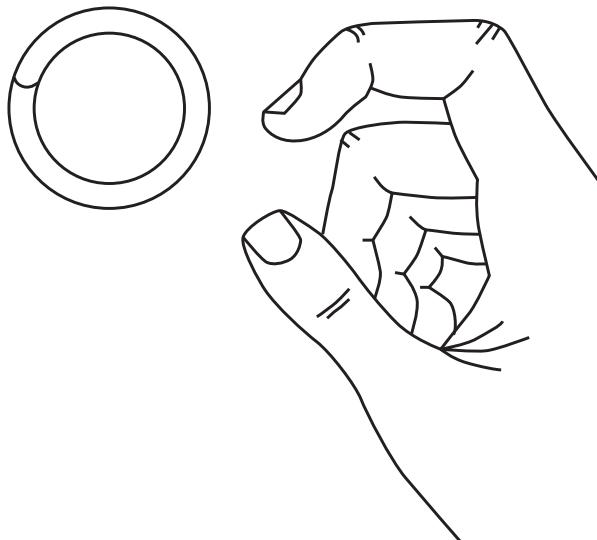

06 What is the difference between total coils and active coils?

In compression springs with closed or closed/ground ends, the total number of coils includes all coils through the entire spring body including the first and last closed coils. Typically with closed and closed/ground ends the first and last coil are mostly inactive. The closed and closed/ground end coils will make physical contact with the next coil prior to pitching out. Springs with less than 4 total coils

are manufactured to spring physical dimensions only due to the limited number of active coils available to mechanically function.

Active coils are the coils in the spring body that mechanically function by storing energy or resisting applied forces. Typically active coils in compression springs are pitched out or have a gap between them.

07 How is the number of active coils calculated?

In any spring, some portion of the end coils will probably be inactive. The number of inactive coils varies depending on the spring end configuration and mating component geometry. The following equations give approximate active coil count, assuming that the spring are compressed between parallel plates.

For closed ends (ground or unground): $N_a \approx N_t - 2$

For open ground ends: $N_a \approx N_t - 1$

For open unground ends: $N_a \approx N_t$

N_a = Active coils

N_t = Total coils

In practice, the number of inactive coils varies slightly as a spring is compressed. If the spring output at two operating heights is known, the number of active coils over the operating height range can be calculated using the following equation for any end configuration.

$$N_a = \frac{Gd^4 (h_1 - h_2)}{8(OD - d)^3 (P_2 - P_1)}$$

G = shear modulus of the spring material

d = wire diameter

OD = spring outside diameter

h_1, h_2 = spring operating heights

P_1, P_2 = spring force at heights h_1 and h_2 , respectively.

08 If I stack two springs, would the rate stay the same?

Stacking springs definitely changes the spring rate. The effective spring rate of the stack will be less than the softest spring in the stack.

The effective spring rate for a stack of n springs is calculated using the following equation.

$$k_{eff} = \frac{1}{\frac{1}{k_1} + \frac{1}{k_2} + \frac{1}{k_3} \dots + \frac{1}{k_n}}$$

09 If I cut a spring in half, would the rate stay the same?

Cutting springs generally decreases the number of active coils. This forces an increase in spring rate. The spring rate is proportional to

$1/N_a$, so reducing the number of active coils by half doubles the spring rate.

10 Tolerance (OD, FL, Load, Total Coils)

Achievable spring tolerances depend heavily on spring geometry characteristics. Empirical studies have resulted in a complex series of calculations that can predict appropriate tolerances for any given spring geometry. These calculations are too involved for

this discussion and best suited for automation through software. Please consult with a **Century Spring** design engineer to determine appropriate tolerances for your particular design or application.

11 What does maximum safe deflection mean? (Stress value, calculated number cycles)

In a static application, this is the maximum safe deflection from free position that will not result in the spring taking a permanent set. For a compression spring, the permanent set will result in reduced free length and force output. For an extension spring, the permanent set will reduce force output by reducing initial tension or increasing the free length.

In cyclic compression spring applications, this would be the maximum deflection to which a spring could be compressed from free length that still assures appropriate spring life. The cyclic condition maximum safe deflection is significantly less than the static application maximum safe deflection.

12 Does it make a difference on a torsion spring whether its left or right hand wound?

Yes. To reduce the likelihood of torsion springs taking a set, the spring should be coiled in the direction that results in increased coil count as load is applied. In other words, the spring should be

coiled such that it “winds up” when load is applied. If the spring “unwinds” as load is applied, it should probably be coiled in the opposite direction.

13 What are the differences between hard drawn, music wire?

Both hard drawn wire and music wire gain their strength through cold drawing the wire from a large diameter rod to its final size. There are three significant differences. First is the chemical composition of the wire. Music wire contains more carbon and less manganese than hard drawn wire. Additionally, the allowed levels of contaminants such as phosphorus and sulfur in music wire are more restrictive. The second key difference is in the wire's strength. Because of the additional carbon, music wire can be drawn to significantly higher

tensile strengths than hard drawn wire. Finally, processing of music wire is done in a manner to provide a finished surface with smaller allowed defects than hard drawn wire. Since surface defects are one of the most common initiation sites for fatigue cracks in springs, smaller surface defects (and their corresponding reduction in stress concentration) enable music wire to be used in high cycle fatigue applications. Hard drawn wire is best suited to static or very low cycle service conditions.

14 What are the advantages of having stainless springs passivated?

For stainless steels to provide proper corrosion resistance, a chromium-rich surface layer must be present to allow the formation of an impermeable oxide. It is this impermeable oxide layer that

prevents additional oxygen from reacting with the iron to create rust. Passivating is a chemical process that assures that the surface is rich in chromium.

15 What are the best materials for fatigue applications?

Since spring wire is primarily subjected to torsional stresses, maximum stress levels occur at the wire surface. As a result, material surface defects (i.e. seams, laps, pits, etc.) can dramatically reduce a spring's fatigue life. Knowing this, wire manufacturers have developed surface preparation methods to restrict the size of wire surface defects as it leaves the mill. Wire produced with these methods is rated for fatigue applications and is often referred to as “valve spring quality”. Since these methods often involve costly processes, fatigue-rated spring wire is often significantly more expensive than its commercial-grade counterpart.

The two most popular materials for fatigue applications today are **Music Wire (ASTM A228)** and **Chrome-Silicon Wire (ASTM A401)**. At wire sizes below approximately 0.080" (2.0 mm), Music Wire offers higher tensile strength; however, Music Wire's maximum service temperature is less than that of Chrome-Silicon.

16 What material is best for high temperature applications?

As temperature resistance increases, the material and processing cost typically increases significantly. Therefore, it is usually wise to select a material that provides resistance for the intended temperature range with minimal excess capability. The table below lists a variety of spring materials and their maximum service temperatures.

Wire Type	Max Temp
Music Wire	250°F
Hard Drawn Carbon	250°F
Oil Tempered Carbon	300°F
Chrome Vanadium	425°F
Chrome Silicon	475°F
302 Stainless	500°F
17-7 PH	600°F
NiCr A286	950°F
Inconel 600	700°F
Inconel X750	1100°F

17 Where can I find minimum tensile strength for materials?

Most spring materials are defined in ASTM specifications. In general, tensile strength varies with wire diameter. The specifications typically include a table that lists allowable tensile strength ranges for various wire diameter ranges. A list of popular material types and the corresponding ASTM specification is given to the right. As an alternate source, the Spring Manufacturers Institute publishes a *Handbook of Spring Design* as well as an *Encyclopedia of Spring Design* (see page 15), both of which include tensile strength data for a variety of spring materials.

Wire Type	ASTM Spec
Oil Tempered Carbon (Commercial)	A229
Oil Tempered Carbon (Valve)	A230
Chrome-Silicon (Commercial)	A401
Chrome-Silicon (Valve)	A877
Chrome-Vanadium (Commercial)	A231
Chrome-Vanadium (Valve)	A232
Hard Drawn Carbon	A227, A764
High Tensile Hard Drawn Carbon	A679
Music Wire	A228
Stainless Steel	A313

18 Which material gives the best corrosion resistance?

Once again, the actual operating environment plays a significant role. Many coatings are available that can provide adequate corrosion resistance for wire types that would not themselves resist corrosion. These include powder coating, phosphating with an oil dip or spray, and plating in some cases. Generally speaking, a coated spring produced from a traditional spring material will involve less cost than producing a spring from stainless steel.

When the application is such that coated spring wire will not meet the requirements of the application, the focus turns to stainless steel wire. Type 316 stainless steel is generally the first choice. This wire can yield very corrosion-resistant springs for most environments. When the application calls for high operating temperatures as well, 17-7 PH wire will also likely be considered.

19 What is the difference between stainless steel grades (302 vs 316)?

Stainless steel 302 is a general purpose stainless steel that has good corrosion resistance in applications with light/mild exposure to water or mild corrosive elements. Stainless steel 302 has some magnetic properties acquired during the coil forming process.

Stainless steel 316 has excellent corrosion resistance. Typical applications for stainless steel 316 include the medical industry and

food grade products. The magnetic properties of stainless steel 316 are significantly lower comparative to stainless steel 302.

300 series stainless steels typically have lower tensile strength comparative to high carbon steels and these lower tensiles must be accounted for during design and material selection process.

20 What is a safe design stress for a compression spring?

This question does not have a single, simple answer. The answer depends heavily on the type of material used (e.g. music wire, stainless steel, chrome-silicon, etc.), material grade (e.g. commercial vs. valve spring quality, standard or high strength, etc.) and the service environment (e.g., static vs. cyclic, corrosive atmosphere, extremely high or low temperatures, etc.).

A spring that has infinite fatigue life under low deflection conditions may take a set if compressed to solid height. Another spring optimized for static life in sea water may have very poor fatigue life when cycled in air.

The design process typically begins with selecting a material type appropriate for the application environment. For static conditions, the spring designer will generally select a stress level appropriate for the selected material that will assure stable spring force output over time. For cyclic conditions, not only does the force output over

time have to be stable, but the spring must be able to survive the intended life without breaking. Finally, manufacturability limitations can also restrict design stress levels.

The best recommendation here is to understand what is desired from the spring in service and work with a **Century Spring** design engineer to develop the optimum design for the operating conditions.

Knowing the answers to the following questions will greatly assist the spring designer.

- Will the spring operate under static or cyclic conditions? If cyclic, what are the minimum and maximum operating loads, deflections, or heights? What is the desired life?
- What is the operating environment?
- What is the operating temperature?
- Does the assembly include physical stops to limit spring deflection? If so, what are the limits?


21 How long will a compression spring last?

The effective life of a compression spring depends heavily on the operating environment. A spring designed for a static application with a properly chosen material should last indefinitely. In cyclic applications, springs are generally designed for infinite life; however,

application nuances such as resonant vibration could drastically reduce spring life. If you stay within the maximum safe deflection listed for the compression springs, the spring will theoretically achieve at least 100,000 cycles.

22 How do you calculate rate/loads for disc spring stacks?


The effective spring rate of a stack of spring washers depends on the orientation of the stack. If Belleville spring washers are stacked so that they nest together (i.e. stacked like paper cups), they are said to be in "parallel" with each other. When a stack of springs in parallel is deflected, all of the springs in the stack deflect as much as the total stack deflection. The effective spring rate for spring washers in parallel is simply the sum of the individual spring washer rates. This is an effective way of achieving very high force output in very limited operating space. For a stack of n spring washers in parallel, the effective spring rate is calculated using the following equation.

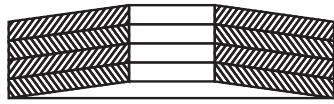

$$k_{\text{eff}} = k_1 + k_2 + k_3 \dots + k_n$$

If spring washers are stacked such that they meet O.D.-to-O.D. and I.D.-to-I.D., the stack is said to be in "series". In this case, the deflection of the stack is distributed between all of the springs in the

stack. The effective spring rate for the stack is lower than the softest individual spring rate in the stack. This is an effective means of gaining available deflection in limited operating space. For a stack of n spring washers in series, the effective spring rate is calculated using the following equation.

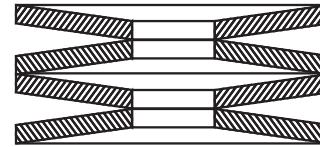

$$k_{\text{eff}} = \frac{1}{1/k_1 + 1/k_2 + 1/k_3 \dots + 1/k_n}$$

In cases where spring washers are stacked in a combination of series and parallel, calculate the effective rates for segments of the stack in series and then calculate the entire stack as a parallel stack considering the series segments as single springs with their respective effective spring rates.

23 What applications are appropriate for die springs?

Die springs are normally associated with higher cycle life applications when planning for proper deflection requirements. Typically this

product is utilized to achieve higher force/load outputs than their standard round wire compression spring counterparts.

Custom Springs

Century Spring corporation is a world leader when it comes to extensive custom capabilities and engineering support from prototype design through production for all industries. **Century Spring's** Custom department and design engineers are available to help you with any custom design inquiries. Our knowledgeable engineering team can help you with any design or application by telephone or emails and can run your design with the aid of our advanced computer programs. Quotations are furnished promptly to your verbal or print specifications for any quantity you are interested in. Lead-time to produce parts is usually two to four weeks from receipt of an order. A custom production spring can be made available in our on-shelf inventory for meeting your needs on a scheduled shipping basis. To acquire a quote please provide us with the physical dimension

requirements (i.e. wire size, OD or ID, free length, spring rate or number of coils. You can also include your load and deflection requirements, any physical constraints, life cycle expectancy, hostile environments to which the spring will be subjected to (i.e., high temperature, shock loads dynamics, water, etc.) and the prototype and production quantities. You can find information about different types of springs and their application along with different material properties on this Catalog that may be of value in defining your spring needs. You can submit your print or specifications for our review to customquote@centuryspring.com or simply go to centuryspring.com/custom-springs/ and fill out the Custom Spring Quote Request Form. You may even mail in a sample spring for duplication or for design modifications.

Spring Characteristics

Design Tolerances

All tolerances will conform to the Spring Manufacturers Institute (SMI) commercial values unless specific tolerances are required. Specified tolerances should be generous enough to permit the fabrication of acceptable springs by standard production methods. Tolerances should be applied to the necessary functional requirements and dimensions only. This gives the **Century Spring** engineering department the opportunity to make dimensional and possible material adjustments in order to meet the objectives of the spring application. Production designers should bear in mind that the standard drawing formats with tolerance boxes (Block Tolerances) for machined dimensions are almost sure to be impractical for springs. They should be deleted and replaced with SMI tolerances driven by the spring's requirements.

Quality Assurance and Certifications

CSC has been committed to providing our customers with the finest quality products and service in the industry since 1927. Our highly skilled customer service team and knowledgeable engineers ensure all our products meet the quality standards of our contractual agreements, including product/ design specific and statutory and regulatory requirements. **Century Spring Corporation** is ISO 9001:2015 certified and also AS91001 Rev. D certified for all Custom Aerospace parts. All our Custom manufactured products go through first article, in-process and final inspection and full traceability and certifications will be provided upon request. Any special inspection requirement such as FAI per AS9102 or PPAP can also be provided at an extra charge upon request.

Materials

Century Spring uses the highest grade of spring metals in wire sizes from .004 to 2" diameter bar stock. Certifications for material, finish and heat treat are available for custom springs upon request.

Some examples of standard materials available for the fabrication of our Custom springs include:

Music wire	ASTM A228
Oil-tempered	ASTM A229
Hard-drawn	ASTM A227
Chrome-Vanadium	ASTM A231
Chrome-Silicon	ASTM A401
Beryllium-Copper	ASTM B197
Phosphor-Bronze	ASTM B159
Stainless Steels	ASTM A313 Type 302, 304, 316,17-7PH
Inconel	AMS 5698,5699

Special Materials

We also offer a large variety of exotic materials such as Elgiloy or Phynox, Duplex, Hastelloy, Monel, Ni-Span C-902 and more. Special requirements such as DFAR, US melt or approved mill rod sources needs to be communicated at the quoting stage.

Stress Relieve and Heat Treat

NADCAP stress relieve or heat treat certifications can be provided with your order if needed. Such requirement needs to be requested by the customer during the quotation stage.

Non-Destructive Testing

We offer a variety of both traditional and advanced NDT test methods such as Visual, Magnetic Particle and Liquid Penetrant testing.


To learn more please email customquote@centuryspring.com in our custom department.

Finish

Standard spring finishes include:

Zinc	ASTM B633 all types
Gold Iridite®	ASTM B633 type 6 SC1
Passivate	AMS 2700 Method 1 type 6 and 8
Black Oxide	(Nitric) and Method 2 (Citric)
Limited coated-wire sizes are available in	Oil or Wax
	Phosphate, Tin, Galvanized

We also offer a large variety of special coatings such as Powder Coat (all colors), Teflon, Dry Film Lube and more.

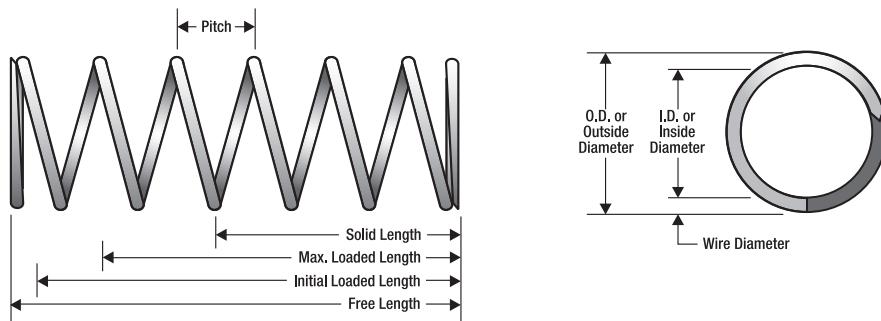

Data Required for Compression Springs

Outside Diameter _____ in.

To work in _____ in. hole

Wind: Optional _____ Right _____ Left _____

Free Length _____ in.

To work over _____ in. dia. shaft

Style of ends:

Wire Diameter _____ in.

To support _____ lbs. ± _____ lbs. at _____ in.

Closed and Ground _____

Material _____

Rate _____ lbs. per in.

Closed only _____

Total Coils _____

Max. solid height _____ in.

Open or Plain _____

Finish _____

Max. deflection _____ in.

Material Properties

The highest grades of spring-wire materials are used in fabricating our springs. To create cost-effective warehousing of our stock spring inventory for our customers, we can only offer material certifications for custom-made springs. Stock spring certificates of conformance to geometric tolerances set by the Spring Manufacturers Institute (SMI) can be copied from that offered in the "Regulatory Requirements and Certificates of Compliance" section of this catalog, or are available upon request. See the Custom Spring section of this catalog on [page 10](#) if material trace certifications or unique materials are required.

Wire materials offered for our stock springs are listed below, with comments on their most outstanding features.

Music wire Recommended for small springs which are subjected to high stresses and suddenly-applied loads

Hard-drawn For average stress applications Oil-tempered - General purpose use where spring's index is not less than 5

Stainless Steel 302 Corrosion resistant for outdoor use, magnetic in spring temper, about 15% less stiff than carbon steel for a given wire size

316 Stainless Steel Corrosion resistance for Medical and food applications, non magnetic, around 15% less stiff than Carbon Steels

Phosphor-Bronze Electrical conductivity and corrosion resistance and about $\frac{1}{3}$ to $\frac{1}{2}$ as strong as steel

Beryllium-Copper Electrical conductivity and corrosion resistance and about $\frac{1}{2}$ as strong as steel

Spring Characteristics

Spring Life

If a spring in question is not subjected to shock loads, rapid cycling, temperature extremes, corrosion, etc., and the total wire stress does not surpass the suggested maximum percentage of the involved material's minimum tensile strength (MTS) found in the following table "Properties of Common Spring Materials", then an estimate of 100,000 to 1,000,000 cycles (deflections) with infrequent breakage could be realized. A service life of over 1,000,000 cycles with infrequent failures may be expected if the wire maximum stress is reduced by approximately another 10% of the table's recommended values.

Other than simply reducing the applied load or deflection, there are many factors that contribute to significantly extending a commercial spring's service-life. Such enhancement generally increases the cost.

Specifications for critical applications that require a maximum life with no failures in fatigue are of no practical use and should be replaced with specifications that detail the user's test conditions in terms of expected life based on empirically-derived statistical failure rates.

In all applications, it should be assumed that a certain percentage will fail early. An attempt should be made to minimize any significant negative effects that an occasional early failure may have on the performance of the product. Regardless of how much time, effort and money that is spent to insure long life, it is nearly impossible to guarantee that there will be no failures in a given production lot of springs; particularly when subjected to severe operating conditions.


One important method we use to extend the life of a custom compression spring is shot peening. This procedure can extend fatigue life by 10-15%. It should be noted that extension springs are normally not candidates for shot peening. Neither are compression springs with wire diameters under .040 of an inch (due to buckling). The spring must be large enough to allow peening of the inside surfaces. Our Custom Spring Department can advise you regarding this procedure.

The "Minimum Tensile Strength of Wire Materials" tables are presented on [page 539](#) in this catalog. These tables contain the minimum expected tensile strengths for available wire sizes.

Temperature Effects

When extension and compression springs are subjected to heat while under stress there is some loss of their load carrying capability. The extent of this loss is related to the temperature reached and to the stress the given spring material is under. The loss-due-to-heat

characteristics are presented in the data below. These data reflect the loss trends more than they represent the absolute load losses for all spring configurations.

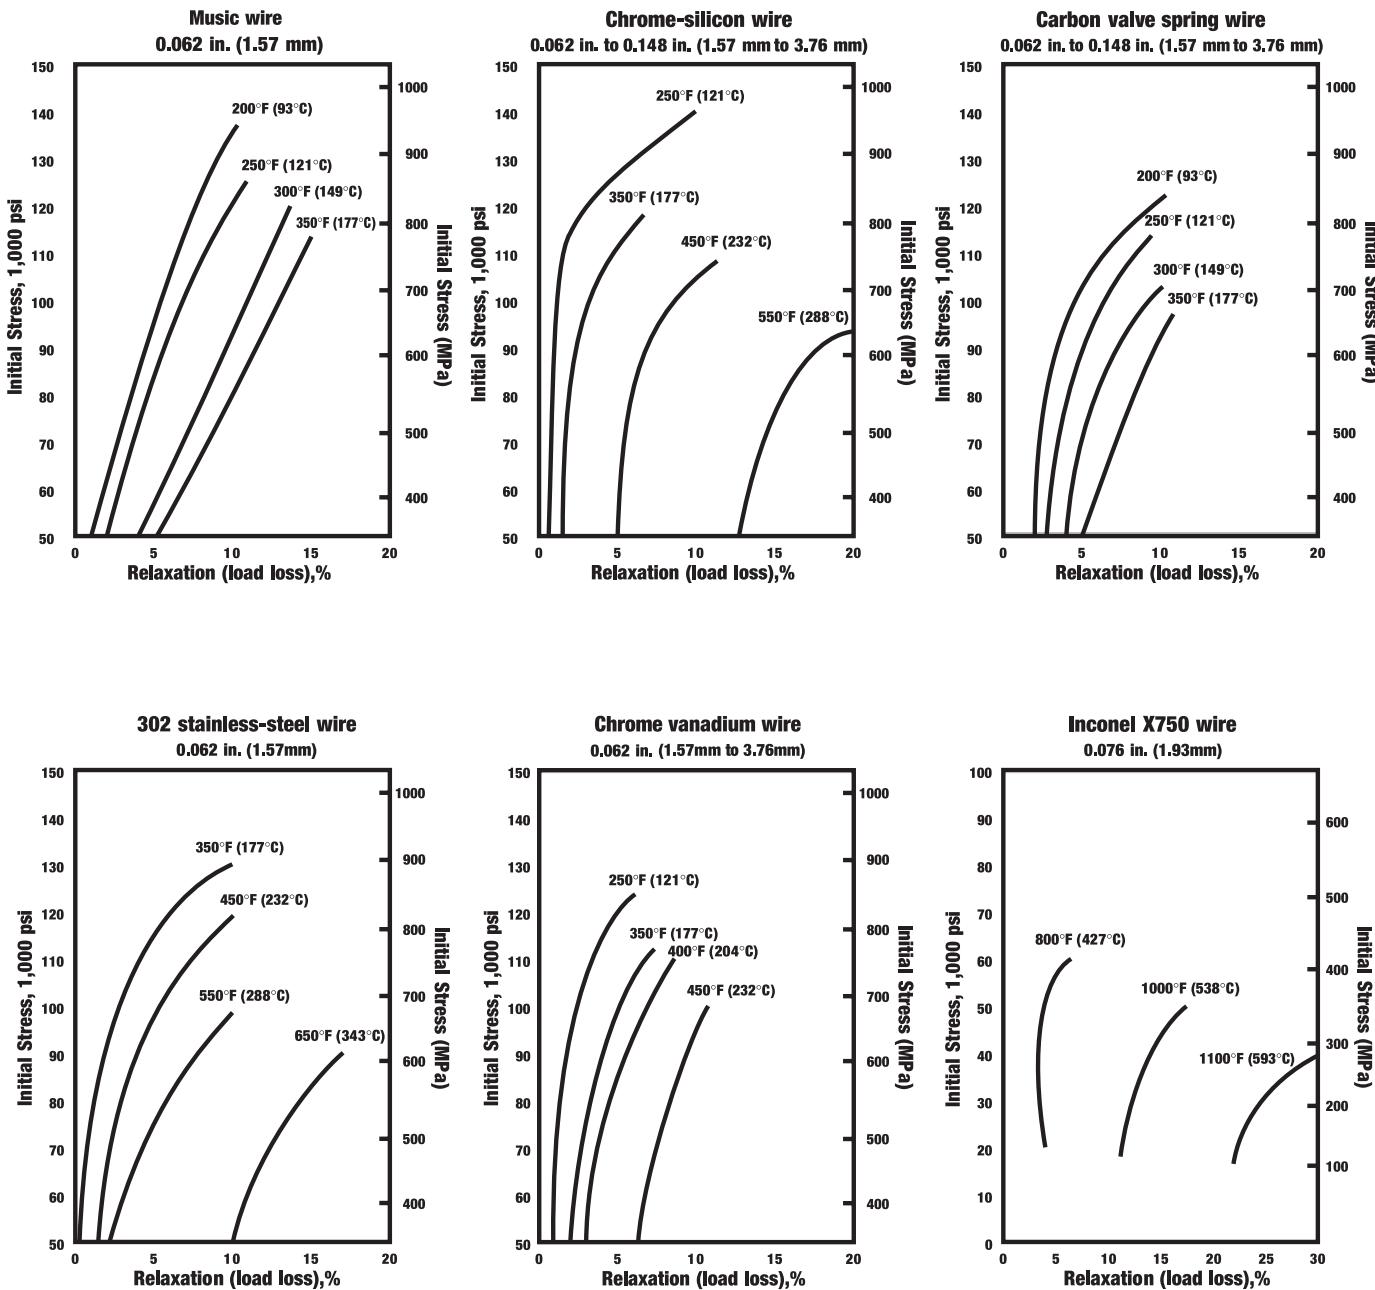

Hardware

Hardware Springs

Century Spring maintains the finest line of packaged replacement springs in the hardware industry. Our reputation is founded on quality, selection and providing the highest level of customer support possible. Our capabilities include:

- Same day shipping
- 100% fill rates
- EDI order processing

Self-service merchandising displays have proven the most effective and efficient method of selling repair springs. Displays ship with a vinyl planogram backer and a one-piece wire rack combination. The planograms are printed with our part numbers, making it simple to order refills and keep the display organized, and the wire rack eliminates individual peghooks and allows the spring selection to utilize a minimal amount of wall space.

Century Spring is the only company offering a complete selection of packaged stainless steel springs. Stainless material is designed to resist corrosion and perform better than carbon steel material in higher temperature environments. Stainless steel springs are packaged in white and blue bags, making them recognizable and easily separated from our carbon steel springs.

All resale items are labeled with the **Century Spring** part number, product description and UPC number which keeps the springs separated and eliminates time wasted identifying items at the cashier. All springs are taken from our Industrial Inventory and meet the same quality standards demanded by the business trade.

There is a proven demand for replacement springs in the hardware industry and **Century Spring's** assortments contain an excellent selection of repair springs for:

- Screen doors
- Cots & lawn furniture
- Chaise lounges
- Hobby horses
- Baby cribs
- Small toys
- Hobbies/handicrafts
- Trampolines
- Lawn & garden equipment
- Rope tie-downs
- Porch swings
- Kitchen appliances
- Small hand tools
- Light equipment

Century Spring also maintains a complete selection of replacement garage door springs and accessories for both one-piece (overhead) and sectional (roll-up) doors. Overhead door springs are manufactured in accordance with requirements from the State of California.

Request our Hardware catalog

Our hardware catalog is a complete line of American made DIY and replacement spring products. Request your copy at info@centuryspring.com.


Century Spring

 DEALER PRICE LIST

Self-Service Packaged Springs

A complete line of American made DIY and replacement spring products.

The largest selection of self-service springs in the world.

Orders filled within 24 hours.

Extension
Compression
Porch Swing Springs
Assortments & More



Email orders to sales@centuryspring.com
 1-800-237-5225 | CenturySpring.com
 5959 Triumph Street, Commerce, CA 90040



1-800-237-5225
1-213-749-1466

Fax 1-213-749-3802
www.centuryspring.com

SMI Materials Now Available From Century Spring!



Century Spring Corp. is honored to be a member of The Spring Manufacturers Institute (SMI).

Founded in 1933, SMI is an association of manufacturers of precision mechanical springs and their associate suppliers. The members of SMI work together to address key issues of the industry worldwide, including quality, materials, technology and government regulations.

SMI promotes and protects the interests of spring makers across the United States and Canada as well as serves as a clearinghouse and source of information on the many facets of business relating to the industry. Below are some of the SMI publications available through **Century Spring**.


Handbook of Spring Design

(110 pages, softcover)

This updated Handbook of Spring Design covers the essentials of extension, compression and torsion spring design, plus segments on tolerances and materials, accurately complimenting spring design software. This condensed version of spring design fundamentals is the ideal reference to be used by design engineers and kept in a briefcase or at a workstation for reference.

Encyclopedia of Spring Design

This valuable reference binder is comprised of Fundamentals of Spring Design, Compression, Extension, Torsion and Garter Springs, Other Types of Springs and Testing and Tolerancing. Created by the SMI Technical Committee, the Encyclopedia of Spring Design contains the technical knowledge to help build a design, choose the correct material and test the final product.

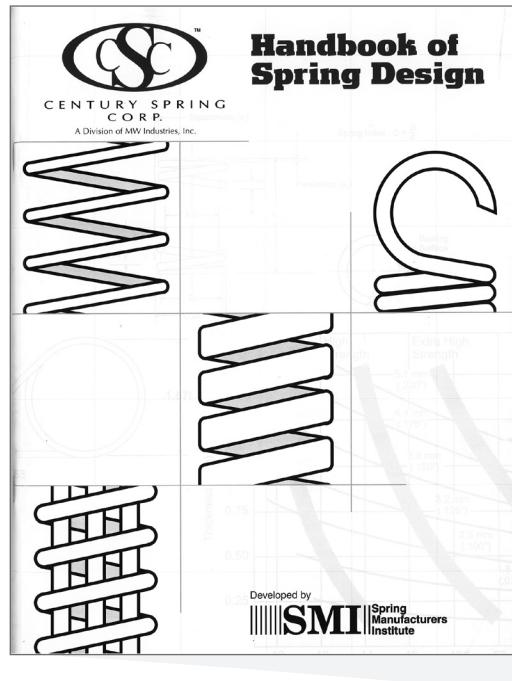


If you are interested in obtaining any of the above publications, please contact us at:

Century Spring Corp.
5959 Triumph St. Commerce, CA 90040
800.237.5225
info@centuryspring.com

Compression Springs

Century Spring warehouses the largest inventory of high-grade, straight, cylindrically-shaped compression springs in the world. All the springs found in this section of the catalog are fabricated from round wire. Rectangular wire is sometimes employed to reduce the solid (totally compressed) height or increase the space efficiency of the design. **Century Spring's** die springs are made from rectangular wire for this reason. See the Die Spring section of this catalog on [page 459](#).

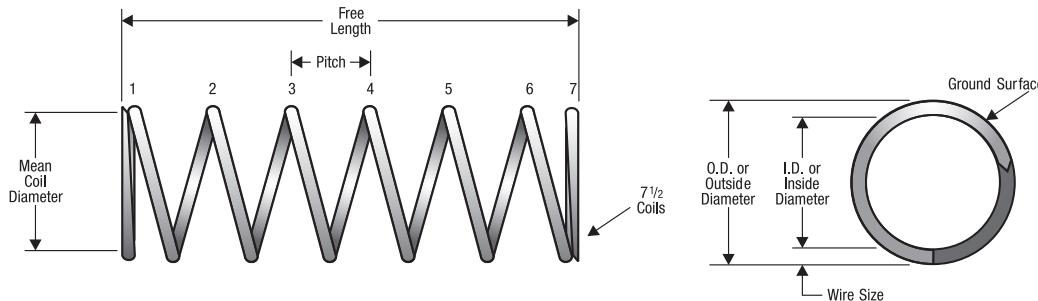

Selecting a Compression Spring

Turn to the inventory page with the desired outside diameter (O.D.). Outside diameters increase as page numbers increase and are found in the left column of the page.

Find the length or rate (strength) you require. These, too, are normally in increasing order.

Spring rate is the load (pounds) it takes to deflect (compress) the spring one theoretical inch, i.e., if the rate = 40 lbs./1 in., it would take 10 pounds to deflect it 1/4 inch, or 80 pounds for 2 inches, etc...

- If the length or rate is not known but the installed working length (WL) is, then select a spring — say 30% longer — than the WL.

You must know the load at the WL. Just subtract the WL from the spring's selected free length and multiply by its rate to obtain the load to compare with your required value.

- If the load required is not obtained, select a new candidate with either an increase or decrease in rate (strength) or free length.
- Be certain that the tabulated solid length (completely compressed) for your candidate spring indicates enough room for deflection and, also, that the deflection is not significantly greater than the tabulated "Maximum Suggested" for stress reasons.

Note: If the spring needed for your application cannot be found in our catalog inventory, we can fabricate it for you.

Design Information

The basic compression rate and wire stress for a compression spring can be estimated with the following:

$$R = \frac{Gd^4}{8nD^3} \quad \text{and} \quad R = \frac{P}{\Delta}$$

$$S = \frac{8PDK}{\pi d^3} \quad \text{or} \quad S = \frac{8RDK\Delta}{\pi d^3}$$

Note: One should not employ the curvature (k) correction stress in an expression solving for deflection. Use the uncorrected stress only or errors will occur. The uncorrected stress can be used for static applications.

Where:
D = Mean diameter, (O.D. - d) inches
d = Wire diameter, inches
G = Modulus (spring steel = 11.5×10^6 , stainless = 10×10^6), p.s.i.
K = Stress correction factor (see plot)
N = Number of total coils
n = Number of active coils (see table)
P = Applied load, pounds
p = Pitch, distance between centerlines of wires of adjoining coils
R = Spring rate, pounds per inch (lbs./in.)
S = Wire stress, psi
Δ = Deflection, inches
π = 3.14

Design Information (continued)

The suggested maximum allowable spring-wire stress values can be derived from the “Minimum Tensile Strength” (MTS) tables found on [page 539](#) section of this catalog. The MTS values vary with the spring-wire diameter. Further, 30 to 45 percent of the MTS value, depending on the material type, is used as a corrected stress target to produce a long fatigue life. The table, “Properties of Common Spring Materials”, found on [page 540](#) of this catalog, indicates the appropriate percentage value of the MTS to use for a given spring material.

For free custom spring designs, visit our website or contact customquote@centuryspring.com.

For quick stress checks on stock or custom spring designs, or technical information, visit our website or contact engineering@centuryspring.com.

Type Of Ends

Spring Characteristics	Open	Open & Ground	Closed	Closed & Ground
Solid Length	$d(N + 1)$	$d \times N$	$d(N + 1)$	$d \times N$
Active Coils (n)	N	N - 1	N - 2	N - 2
Total Coils (N)	n	n + 1	n + 2	n + 2
Free Length (L)	$(p \times N) + d$	$p \times N$	$(p \times n) + 3d$	$(p \times n) + 2d$


Spring Characteristics

Service Life

It should be noted that if critical force-versus-deflection linearity is required, only the center 20 to 80 percent of the available deflection range should be employed. Thus, reserve at least the first and last 15 to 20 percent of the range for potential spring-end and adjacent coil-contact effects. These effects can be largely ignored for the majority of spring applications.

The column “Suggested Maximum Deflection” found in the following pages of inventory reflects the recommended inches of travel to obtain a statistical service-life of approximately 100,000 cycles (deflections) with infrequent breakage. This can be realized if the spring in question is not subjected to shock loads, rapid cycling, temperature extremes, corrosion or stress values above those previously recommended. If the spring is statically loaded (not cycling), a near-infinite life can be expected. Extended spring service-life can be expected by applying recommendations found in the Material Properties section on [page 12](#) of this catalog.

Wahl Curvature Stress Correction

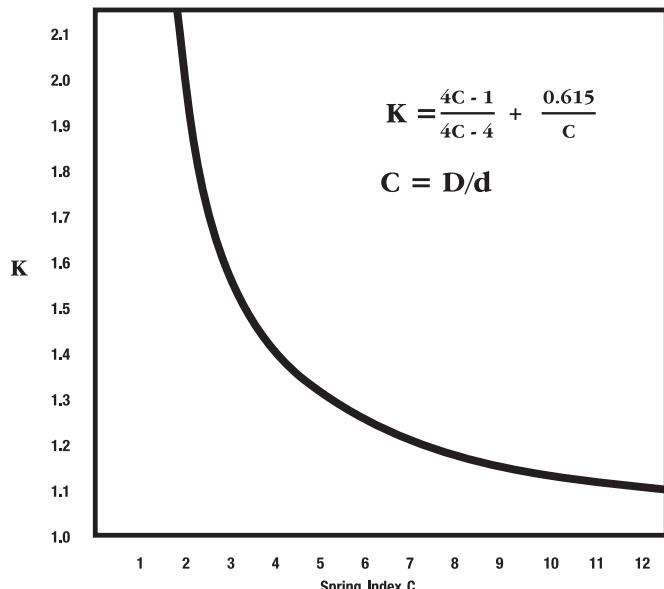

Materials

The highest grades of spring wire are used for fabricating our springs. To create cost-effective warehousing of our stock spring inventory for our customers, we offer material certification for custom springs only. For stock springs, we offer an optional material verification statement for a \$25 fee. Certifications of conformance for geometric tolerances set by the Spring Manufacturers Institute (SMI) are available for our stock springs upon request. See the Custom Spring section of this catalog on [page 10](#) if material trace certifications or unique materials are required.

“Spring Steel” is a stock inventory term covering:

- Music wire
- Hard-drawn (MB) wire
- Oil-tempered wire

Additionally, stock compression-spring materials include:

- Stainless Steel 302 and 316
- Beryllium Copper
- Phosphor Bronze

Spring Characteristics (continued)

Tolerances

Century Spring manufactures stock springs to commercial tolerances defined by the SMI. Calculated rates and loads based on the SMI geometric tolerances have an approximate +/- ten percent. Low or high-index springs will have higher values. Compression springs characteristically have an hourglass shape when coiled on an automatic coiler; therefore, outside/inside tolerancing is applied to end coils only. This is an important consideration when selecting a spring that fits over a rod or inside a cylinder. Call us if tighter tolerance values are required.

Regarding angle tolerance, the plane of the ground end of a spring is usually within five degrees of the perpendicular-to-the-body axis of the spring.

Please note, springs with a coil count less than 4 are made to physical dimensions only. The rate is not certified because of the low amount of active coils. The listed solid height dimension is for reference only.

Direction of Helix (wind)

The wind direction of our stock springs varies, both RHW and LHW. Stock springs are not sorted for wind direction. To order springs wound to a specific direction, please see [page 5](#) for more information or contact our Custom Division at customquote@centuryspring.com.

Ends

The compression spring ends configuration is indicated in the "Ends" column of our inventory listings which are:

Closed (C) - The last coil at each end is bent back to touch the previous coil to create a flat base.

Closed and Ground (C&G) - The closed ends of a spring ground to a more accurate flat base. This will also reduce the solid length.

Open (O) - The spring end coils remain open, maintaining the spring machine's helical wind shape.

Finish

The finishes available for our compression springs are as indicated in the "Finish" column of our inventory listing which include:


Zinc

Gold Iridite®

Black Oxide


Passivated (upon request)

None (can be plated upon request)




Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends E n s h									
0.036	0.914	10075	0.59	14.986	0.022	0.559	2.60	0.455	0.150	3.810	0.390	1.735	0.350	8.89	0.007	0.18	49.00	SST	C	N
0.036	0.914	JJ-7	0.63	16.002	0.024	0.610	1.60	0.280	0.160	4.064	0.250	1.112	0.250	6.35	0.006	0.15	40.00	SST	C	N
0.04	1.016	2924	0.66	16.764	0.020	0.508	11.00	1.925	0.130	3.302	1.400	6.227	0.500	12.70	0.010	0.25	48.50	MW	C	N
0.04	1.016	10778	0.69	17.526	0.028	0.711	1.00	0.175	0.350	8.890	0.350	1.557	0.300	7.62	0.006	0.15	49.50	MW	C	N
0.054	1.372	RR-6	0.25	6.350	0.036	0.914	6.20	1.085	0.090	2.286	0.560	2.491	0.160	4.06	0.009	0.23	16.50	SST	C	N
0.054	1.372	10619	0.72	18.288	0.038	0.965	1.60	0.280	0.370	9.398	0.600	2.669	0.320	8.13	0.008	0.20	39.00	MW	C	N
0.057	1.448	70000	0.13	3.302	0.045	1.143	3.70	0.648	0.070	1.778	0.250	1.112	0.040	1.02	0.006	0.15	5.75	MW	C	N
0.057	1.448	70003	0.13	3.302	0.045	1.143	3.30	0.578	0.050	1.270	0.170	0.756	0.040	1.02	0.006	0.15	5.75	SST	C	N
0.057	1.448	70009	0.13	3.302	0.043	1.092	6.90	1.208	0.060	1.524	0.400	1.779	0.050	1.27	0.007	0.18	6.00	MW	C	N
0.057	1.448	70009S	0.13	3.302	0.043	1.092	6.00	1.050	0.040	1.016	0.260	1.156	0.050	1.27	0.007	0.18	6.00	SST	C	N
0.057	1.448	70018	0.13	3.302	0.041	1.041	12.00	2.100	0.050	1.270	0.570	2.535	0.060	1.52	0.008	0.20	6.13	MW	C	N
0.057	1.448	70018S	0.13	3.302	0.041	1.041	11.00	1.925	0.030	0.762	0.370	1.646	0.060	1.52	0.008	0.20	6.13	SST	C	N
0.057	1.448	70001	0.19	4.826	0.045	1.143	2.30	0.403	0.110	2.794	0.250	1.112	0.060	1.52	0.006	0.15	8.13	MW	C	N
0.057	1.448	70001S	0.19	4.826	0.045	1.143	2.00	0.350	0.080	2.032	0.170	0.756	0.060	1.52	0.006	0.15	8.13	SST	C	N
0.057	1.448	70010	0.19	4.826	0.043	1.092	4.00	0.700	0.100	2.540	0.400	1.779	0.070	1.78	0.007	0.18	8.88	MW	C	N
0.057	1.448	70010S	0.19	4.826	0.043	1.092	3.50	0.613	0.070	1.778	0.260	1.156	0.070	1.78	0.007	0.18	8.88	SST	C	N
0.057	1.448	70019	0.19	4.826	0.041	1.041	7.40	1.295	0.080	2.032	0.570	2.535	0.080	2.03	0.008	0.20	8.75	MW	C	N
0.057	1.448	70019S	0.19	4.826	0.041	1.041	6.40	1.120	0.060	1.524	0.370	1.646	0.080	2.03	0.008	0.20	8.75	SST	C	N
0.057	1.448	70002	0.25	6.350	0.045	1.143	1.70	0.298	0.150	3.810	0.250	1.112	0.070	1.78	0.006	0.15	10.30	MW	C	N
0.057	1.448	70002S	0.25	6.350	0.045	1.143	1.50	0.263	0.110	2.794	0.170	0.756	0.070	1.78	0.006	0.15	10.30	SST	C	N
0.057	1.448	70011	0.25	6.350	0.043	1.092	3.10	0.543	0.130	3.302	0.400	1.779	0.080	2.03	0.007	0.18	11.00	MW	C	N
0.057	1.448	70011S	0.25	6.350	0.043	1.092	2.70	0.473	0.100	2.540	0.260	1.156	0.080	2.03	0.007	0.18	11.00	SST	C	N
0.057	1.448	70020	0.25	6.350	0.041	1.041	5.30	0.928	0.110	2.794	0.570	2.535	0.100	2.54	0.008	0.20	11.50	MW	C	N
0.057	1.448	70020S	0.25	6.350	0.041	1.041	4.60	0.805	0.080	2.032	0.370	1.646	0.100	2.54	0.008	0.20	11.50	SST	C	N
0.057	1.448	70003	0.31	7.874	0.045	1.143	1.40	0.245	0.190	4.826	0.250	1.112	0.080	2.03	0.006	0.15	12.40	MW	C	N
0.057	1.448	70003S	0.31	7.874	0.045	1.143	1.20	0.210	0.140	3.556	0.170	0.756	0.080	2.03	0.006	0.15	12.40	SST	C	N
0.057	1.448	70012	0.31	7.874	0.043	1.092	2.40	0.420	0.170	4.318	0.400	1.779	0.100	2.54	0.007	0.18	13.50	MW	C	N
0.057	1.448	70012S	0.31	7.874	0.043	1.092	2.10	0.368	0.120	3.048	0.260	1.156	0.100	2.54	0.007	0.18	13.50	SST	C	N
0.057	1.448	70021	0.31	7.874	0.041	1.041	4.10	0.718	0.140	3.556	0.570	2.535	0.120	3.05	0.008	0.20	14.30	MW	C	N
0.057	1.448	70021S	0.31	7.874	0.041	1.041	3.60	0.630	0.100	2.540	0.370	1.646	0.120	3.05	0.008	0.20	14.30	SST	C	N
0.057	1.448	70004	0.38	9.652	0.045	1.143	1.10	0.193	0.230	5.842	0.250	1.112	0.100	2.54	0.006	0.15	14.80	MW	C	N
0.057	1.448	70004S	0.38	9.652	0.045	1.143	0.96	0.168	0.170	4.318	0.170	0.756	0.100	2.54	0.006	0.15	14.80	SST	C	N
0.057	1.448	70013	0.38	9.652	0.043	1.092	2.00	0.350	0.200	5.080	0.400	1.779	0.120	3.05	0.007	0.18	15.80	MW	C	N
0.057	1.448	70013S	0.38	9.652	0.043	1.092	1.70	0.298	0.150	3.810	0.260	1.156	0.120	3.05	0.007	0.18	15.80	SST	C	N
0.057	1.448	70022	0.38	9.652	0.041	1.041	3.40	0.595	0.170	4.318	0.570	2.535	0.140	3.56	0.008	0.20	16.80	MW	C	N
0.057	1.448	70022S	0.38	9.652	0.041	1.041	3.00	0.525	0.120	3.048	0.370	1.646	0.140	3.56	0.008	0.20	16.80	SST	C	N
0.057	1.448	70005	0.44	11.176	0.045	1.143	0.95	0.166	0.260	6.604	0.250	1.112	0.110	2.79	0.006	0.15	16.80	MW	C	N
0.057	1.448	70005S	0.44	11.176	0.045	1.143	0.83	0.145	0.200	5.080	0.170	0.756	0.110	2.79	0.006	0.15	16.80	SST	C	N
0.057	1.448	70014	0.44	11.176	0.043	1.092	1.70	0.298	0.230	5.842	0.400	1.779	0.140	3.56	0.007	0.18	18.30	MW	C	N
0.057	1.448	70014S	0.44	11.176	0.043	1.092	1.50	0.263	0.180	4.572	0.260	1.156	0.140	3.56	0.007	0.18	18.30	SST	C	N
0.057	1.448	70023	0.44	11.176	0.041	1.041	2.80	0.490	0.200	5.080	0.570	2.535	0.170	4.32	0.008	0.20	19.60	MW	C	N
0.057	1.448	70023S	0.44	11.176	0.041	1.041	2.50	0.438	0.150	3.810	0.370	1.646	0.170	4.32	0.008	0.20	19.60	SST	C	N
0.057	1.448	70006	0.50	12.700	0.045	1.143	0.85	0.149	0.300	7.620	0.250	1.112	0.120	3.05	0.006	0.15	18.50	MW	C	N
0.057	1.448	70006S	0.50	12.700	0.045	1.143	0.74	0.130	0.220	5.588	0.170	0.756	0.120	3.05	0.006	0.15	18.50	SST	C	N
0.057	1.448	70015	0.50	12.700	0.043	1.092	1.50	0.263	0.260	6.604	0.400	1.779	0.150	3.81	0.007	0.18	20.40	MW	C	N
0.057	1.448	70015S	0.50	12.700	0.043	1.092	1.30	0.228	0.200	5.080	0.260	1.156	0.150	3.81	0.007	0.18	20.40	SST	C	N
0.057	1.448	70024	0.50	12.700	0.041	1.041	2.50	0.438	0.230	5.842	0.570	2.535	0.190	4.83	0.008	0.20	22.40	MW	C	N
0.057	1.448	70024S	0.50	12.700	0.041	1.041	2.10	0.368	0.170	4.318	0.370	1.646	0.190	4.83	0.008	0.20	22.40	SST	C	N
0.057	1.448	70027	0.56	14.224	0.045	1.143	0.75	0.131	0.340	8.636	0.250	1.112	0.130	3.30	0.006	0.15	20.80	MW	C	N
0.057	1.448	70027S	0.56	14.224	0.045	1.143	0.65	0.114	0.250	6.350	0.170	0.756	0.130	3.30	0.006	0.15	20.80	SST	C	N
0.057	1.448	70016	0.56	14.224	0.043	1.092	1.30	0.228	0.310	7.874	0.400	1.779	0.170	4.32	0.007	0.18	23.30	MW	C	N
0.057	1.448	70016S	0.56	14.224	0.043	1.092	1.10	0.193	0.230	5.842	0.260	1.156	0.170	4.32	0.007	0.18	23.30	SST	C	N
0.057	1.448	70025	0.56	14.224	0.041	1.041	2.20	0.385	0.260	6.604	0.570	2.535	0.210	5.33	0.008	0.20	24.80	MW	C	N
0.057	1.448	70025S	0.56	14.224	0.041	1.041	1.90	0.333	0.190	4.826	0.370									




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.062	1.575	J-36	0.25	6.350	0.044	1.118	5.80	1.015	0.120	3.048	0.710	3.158	0.130	3.30	0.009	0.23	13.00	MW	C	N
0.062	1.575	N-13	0.25	6.350	0.042	1.067	7.00	1.225	0.090	2.286	0.630	2.802	0.160	4.06	0.010	0.25	15.00	SST	C	N
0.062	1.575	10749	0.28	7.112	0.046	1.168	3.00	0.525	0.160	4.064	0.470	2.091	0.120	3.05	0.008	0.20	14.50	MW	C	N
0.062	1.575	B-59-A	0.31	7.874	0.046	1.168	5.20	0.910	0.100	2.540	0.530	2.357	0.080	2.03	0.008	0.20	9.25	MW	C	N
0.062	1.575	A14-23	0.34	8.636	0.052	1.321	0.46	0.081	0.190	4.826	0.090	0.400	0.060	1.52	0.005	0.13	11.25	SST	C	N
0.062	1.575	A15-1	0.38	9.652	0.044	1.118	5.50	0.963	0.140	3.556	0.750	3.336	0.130	3.30	0.009	0.23	13.50	MW	C	N
0.062	1.575	B-401	0.50	12.700	0.046	1.168	1.70	0.298	0.300	7.620	0.510	2.268	0.200	5.08	0.008	0.20	24.00	MW	C	Z
0.062	1.575	B-402	0.50	12.700	0.042	1.067	4.40	0.770	0.230	5.842	1.000	4.448	0.270	6.86	0.010	0.25	25.50	MW	C	Z
0.062	1.575	3623	0.69	17.526	0.044	1.118	2.60	0.455	0.280	7.112	0.750	3.336	0.240	6.10	0.009	0.23	26.00	MW	C	N
0.062	1.575	3720	0.72	18.288	0.046	1.168	1.00	0.175	0.400	10.160	0.410	1.824	0.320	8.13	0.008	0.20	38.80	MW	C	N
0.062	1.575	2534	0.91	23.114	0.044	1.118	1.30	0.228	0.450	11.430	0.600	2.669	0.460	11.68	0.009	0.23	49.80	MW	C	N
0.062	1.575	N-18	0.97	24.638	0.052	1.321	0.06	0.011	0.610	15.494	0.040	0.178	0.360	9.14	0.005	0.13	70.00	SST	C	N
0.068	1.727	10938	0.31	7.874	0.046	1.168	8.10	1.418	0.100	2.540	0.780	3.469	0.170	4.32	0.011	0.28	14.50	SST	C	N
0.068	1.727	A10-13	0.34	8.636	0.052	1.321	2.60	0.455	0.190	4.826	0.490	2.180	0.110	2.79	0.008	0.20	12.50	MW	C	GI
0.072	1.829	A10-3	0.50	12.700	0.042	1.067	56.00	9.800	0.050	1.270	2.600	11.565	0.150	3.81	0.015	0.38	9.00	MW	C	N
0.075	1.905	KK-29	0.20	5.080	0.059	1.499	4.40	0.770	0.100	2.540	0.440	1.957	0.060	1.52	0.008	0.20	6.50	MW	C	N
0.078	1.981	N-2	0.19	4.826	0.068	1.727	0.21	0.037	0.120	3.048	0.020	0.089	0.070	1.78	0.005	0.13	13.00	MW	C	N
0.078	1.981	N-11	0.22	5.588	0.058	1.473	9.50	1.663	0.060	1.524	0.530	2.357	0.070	1.78	0.010	0.25	6.25	SST	C	N
0.078	1.981	N-78	0.25	6.350	0.068	1.727	0.38	0.067	0.210	5.334	0.080	0.356	0.050	1.27	0.005	0.13	8.00	MW	C	N
0.078	1.981	S-1013	0.25	6.350	0.050	1.270	24.00	4.200	0.060	1.524	1.400	6.227	0.150	3.81	0.014	0.36	9.50	SST	C	N
0.078	1.981	12526	0.25	6.350	0.048	1.219	49.00	8.575	0.050	1.270	2.400	10.675	0.140	3.56	0.015	0.38	8.00	MW	C	N
0.078	1.981	M-6	0.25	6.350	0.044	1.118	56.00	9.800	0.040	1.016	2.100	9.341	0.210	5.33	0.017	0.43	11.50	MW	C	N
0.078	1.981	S-904	0.28	7.112	0.054	1.372	12.00	2.100	0.070	1.778	0.890	3.959	0.130	3.30	0.012	0.30	9.50	SST	C	N
0.078	1.981	LL-1	0.31	7.874	0.046	1.168	61.00	10.675	0.050	1.270	2.900	12.899	0.150	3.81	0.016	0.41	8.50	MW	C	N
0.078	1.981	DD-73	0.34	8.636	0.058	1.473	5.10	0.893	0.160	4.064	0.820	3.647	0.120	3.05	0.010	0.25	11.00	MW	C	N
0.078	1.981	11146	0.34	8.636	0.054	1.372	12.00	2.100	0.120	3.048	1.400	6.227	0.140	3.56	0.012	0.30	11.00	MW	C	N
0.078	1.981	4345	0.50	12.700	0.066	1.676	0.19	0.033	0.320	8.128	0.060	0.267	0.180	4.57	0.006	0.15	28.50	MW	C	N
0.078	1.981	10213	1.13	28.702	0.054	1.372	2.60	0.455	0.540	13.716	1.400	6.227	0.520	13.21	0.012	0.30	42.00	MW	C	Z
0.078	1.981	B4-1	1.50	38.100	0.054	1.372	2.90	0.508	0.310	7.874	0.890	3.959	0.410	10.41	0.012	0.30	33.00	SST	C	N
0.083	2.108	LL-66	0.25	6.350	0.055	1.397	22.00	3.850	0.060	1.524	1.300	5.782	0.130	3.30	0.014	0.36	8.50	SST	C	N
0.083	2.108	NN-81	0.88	22.352	0.059	1.499	2.20	0.385	0.390	9.906	0.840	3.736	0.440	11.18	0.012	0.30	36.00	SST	C	N
0.084	2.13	B6-19	0.280	7.11	0.074	1.880	0.360	0.060	0.216	5.480	0.079	0.350	0.040	1.02	0.005	0.13	7.00	SPR	C	N
0.088	2.235	70027	0.13	3.302	0.072	1.829	5.80	1.015	0.070	1.778	0.380	1.690	0.040	1.02	0.008	0.20	4.00	MW	C	N
0.088	2.235	70027S	0.13	3.302	0.072	1.829	5.00	0.875	0.050	1.270	0.240	1.068	0.040	1.02	0.008	0.20	4.00	SST	C	N
0.088	2.235	70036	0.13	3.302	0.068	1.727	13.00	2.275	0.060	1.524	0.740	3.292	0.050	1.27	0.010	0.25	4.38	MW	C	N
0.088	2.235	70036S	0.13	3.302	0.068	1.727	11.00	1.925	0.040	1.016	0.470	2.091	0.050	1.27	0.010	0.25	4.38	SST	C	N
0.088	2.235	70047	0.13	3.302	0.064	1.626	26.00	4.550	0.050	1.270	1.300	5.782	0.070	1.78	0.012	0.30	4.63	MW	C	N
0.088	2.235	70047S	0.13	3.302	0.064	1.626	22.00	3.850	0.040	1.016	0.800	3.558	0.070	1.78	0.012	0.30	4.63	SST	C	N
0.088	2.235	70028	0.19	4.826	0.072	1.829	3.50	0.613	0.110	2.794	0.380	1.690	0.050	1.27	0.008	0.20	5.25	MW	C	N
0.088	2.235	70028S	0.19	4.826	0.072	1.829	3.10	0.543	0.080	2.032	0.240	1.068	0.050	1.27	0.008	0.20	5.25	SST	C	N
0.088	2.235	70037	0.19	4.826	0.068	1.727	6.90	1.208	0.110	2.794	0.740	3.292	0.070	1.78	0.010	0.25	6.38	MW	C	N
0.088	2.235	70037S	0.19	4.826	0.068	1.727	6.00	1.050	0.080	2.032	0.470	2.091	0.070	1.78	0.010	0.25	6.38	SST	C	N
0.088	2.235	KK-17	0.19	4.826	0.068	1.727	10.00	1.750	0.070	1.778	0.740	3.292	0.060	1.52	0.010	0.25	5.00	MW	C	N
0.088	2.235	70048	0.19	4.826	0.064	1.626	15.00	2.625	0.090	2.286	1.300	5.782	0.090	2.29	0.012	0.30	6.63	MW	C	N
0.088	2.235	70048S	0.19	4.826	0.064	1.626	13.00	2.275	0.060	1.524	0.800	3.558	0.090	2.29	0.012	0.30	6.63	SST	C	N
0.088	2.235	70029	0.25	6.350	0.072	1.829	2.50	0.438	0.150	3.810	0.380	1.690	0.060	1.52	0.008	0.20	6.63	MW	C	N
0.088	2.235	70029S	0.25	6.350	0.072	1.829	2.20	0.385	0.110	2.794	0.240	1.068	0.060	1.52	0.008	0.20	6.63	SST	C	N
0.088	2.235	70038	0.25	6.350	0.068	1.727	5.00	0.875	0.150	3.810	0.740	3.292	0.090	2.29	0.010	0.25	8.00	MW	C	N
0.088	2.235	70038S	0.25	6.350	0.068	1.727	4.40	0.770	0.110	2.794	0.470	2.091	0.090	2.29	0.010	0.25	8.00	SST	C	N
0.088	2.235	70049	0.25	6.350	0.064	1.626	11.00	1.925	0.120	3.048	1.300	5.782	0.110	2.79	0.012	0.30	8.38	MW	C	N
0.088	2.235	70049S	0.25	6.350	0.064	1.626	9.30	1.628	0.090	2.286	0.800	3.558	0.110	2.79	0.012	0.30	8.38	SST	C	N
0.088	2.235	70030	0.31	7.874	0.072	1.829	2.00	0.350	0.190	4.826	0.380	1.690	0.070	1.78	0.008	0.20	7.63	MW	C	N
0.088	2.235	70030S	0.31	7.874	0.072	1.829	1.80	0.315	0.140	3.556	0.240	1.068	0.070	1.78	0.008	0.20	7.63	SST	C	N
0.088	2.235	70039	0.31	7.874	0.068	1.727	3.90	0.683	0.190	4.826	0.740	3.292	0.110	2.79	0.010	0.25	9.75	MW	C	N
0.088	2.235	70039S	0.31	7.874	0.068	1.727	3.4													




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh								
0.088	2.235	70054	0.56	14.224	0.064	1.626	4.50	0.788	0.280	7.112	1.300	5.782	0.220	5.59	0.012	0.30	17.30	MW	C	N
0.088	2.235	70054S	0.56	14.224	0.064	1.626	3.90	0.683	0.210	5.334	0.800	3.558	0.220	5.59	0.012	0.30	17.30	SST	C	N
0.088	2.235	70035	0.63	16.002	0.072	1.829	0.95	0.166	0.400	10.160	0.380	1.690	0.120	3.05	0.008	0.20	14.10	MW	C	N
0.088	2.235	70035S	0.63	16.002	0.072	1.829	0.83	0.145	0.300	7.620	0.240	1.068	0.120	3.05	0.008	0.20	14.10	SST	C	N
0.088	2.235	70044	0.63	16.002	0.068	1.727	1.90	0.333	0.400	10.160	0.740	3.292	0.190	4.83	0.010	0.25	18.40	MW	C	N
0.088	2.235	70044S	0.63	16.002	0.068	1.727	1.60	0.280	0.290	7.366	0.470	2.091	0.190	4.83	0.010	0.25	18.40	SST	C	N
0.088	2.235	70055	0.63	16.002	0.064	1.626	3.90	0.683	0.330	8.382	1.300	5.782	0.250	6.35	0.012	0.30	19.60	MW	C	N
0.088	2.235	70055S	0.63	16.002	0.064	1.626	3.40	0.595	0.240	6.096	0.800	3.558	0.250	6.35	0.012	0.30	19.60	SST	C	N
0.088	2.235	70045	0.69	17.526	0.068	1.727	1.70	0.298	0.430	10.922	0.740	3.292	0.210	5.33	0.010	0.25	19.90	MW	C	N
0.088	2.235	70045S	0.69	17.526	0.068	1.727	1.50	0.263	0.320	8.128	0.470	2.091	0.210	5.33	0.010	0.25	19.90	SST	C	N
0.088	2.235	70056	0.69	17.526	0.064	1.626	3.50	0.613	0.360	9.144	1.300	5.782	0.270	6.86	0.012	0.30	21.40	MW	C	N
0.088	2.235	70056S	0.69	17.526	0.064	1.626	3.00	0.525	0.260	6.604	0.800	3.558	0.270	6.86	0.012	0.30	21.40	SST	C	N
0.088	2.235	70046	0.75	19.050	0.068	1.727	1.60	0.280	0.460	11.684	0.740	3.292	0.220	5.59	0.010	0.25	20.90	MW	C	N
0.088	2.235	70046S	0.75	19.050	0.068	1.727	1.40	0.245	0.340	8.636	0.470	2.091	0.220	5.59	0.010	0.25	20.90	SST	C	N
0.088	2.235	70057	0.75	19.050	0.064	1.626	3.10	0.543	0.400	10.160	1.300	5.782	0.300	7.62	0.012	0.30	23.90	MW	C	N
0.088	2.235	70057S	0.75	19.050	0.064	1.626	2.70	0.473	0.300	7.620	0.800	3.558	0.300	7.62	0.012	0.30	23.90	SST	C	N
0.092	2.337	11161	0.50	12.700	0.072	1.829	1.60	0.280	0.330	8.382	0.550	2.446	0.120	3.05	0.010	0.25	11.00	BC	C	N
0.094	2.388	EE-21	0.13	3.302	0.066	1.676	48.00	8.400	0.020	0.508	1.200	5.338	0.070	1.78	0.014	0.36	4.00	SST	C	N
0.094	2.388	S-1010	0.14	3.556	0.054	1.372	144.00	25.200	0.010	0.254	1.400	6.227	0.130	3.30	0.020	0.51	5.50	SST	C	N
0.094	2.388	3719	0.16	4.064	0.068	1.727	24.00	4.200	0.060	1.524	1.500	6.672	0.080	2.03	0.013	0.33	5.25	MW	C	N
0.094	2.388	BB-5	0.17	4.318	0.078	1.981	2.30	0.403	0.120	3.048	0.270	1.201	0.060	1.52	0.008	0.20	6.00	MW	C	N
0.094	2.388	O-23	0.19	4.826	0.074	1.880	2.70	0.473	0.070	1.778	0.180	0.801	0.120	3.05	0.010	0.25	11.00	MW	C	Z
0.094	2.388	2870	0.19	4.826	0.072	1.829	7.20	1.260	0.100	2.540	0.710	3.158	0.090	2.29	0.011	0.28	7.13	MW	C	Z
0.094	2.388	BB-21	0.22	5.588	0.078	1.981	2.70	0.473	0.090	2.286	0.230	1.023	0.050	1.27	0.008	0.20	5.00	SST	C	N
0.094	2.388	II-22	0.22	5.588	0.074	1.880	1.90	0.333	0.060	1.524	0.110	0.489	0.160	4.06	0.010	0.25	15.00	MW	C	N
0.094	2.388	N-79	0.25	6.350	0.084	2.134	0.18	0.032	0.200	5.080	0.040	0.178	0.050	1.27	0.005	0.13	9.00	MW	C	N
0.094	2.388	JJ-68	0.25	6.350	0.074	1.880	4.30	0.753	0.100	2.540	0.440	1.957	0.080	2.03	0.010	0.25	7.00	SST	C	N
0.094	2.388	11923	0.25	6.350	0.070	1.778	7.70	1.348	0.130	3.302	1.000	4.448	0.120	3.05	0.012	0.30	9.00	MW	C	N
0.094	2.388	N-99	0.25	6.350	0.070	1.778	6.70	1.173	0.120	3.048	0.780	3.469	0.130	3.30	0.012	0.30	10.10	MW	C	GI
0.094	2.388	3648	0.25	6.350	0.066	1.676	22.00	3.850	0.090	2.286	1.900	8.451	0.110	2.79	0.014	0.36	7.00	MW	C	Z
0.094	2.388	M-118	0.25	6.350	0.064	1.626	30.00	5.250	0.070	1.778	2.100	9.341	0.120	3.05	0.015	0.38	7.00	MW	C	Z
0.094	2.388	II-96	0.25	6.350	0.052	1.321	125.00	21.875	0.030	0.762	3.500	15.568	0.170	4.32	0.021	0.53	7.00	SST	C	N
0.094	2.388	O-148	0.28	7.112	0.048	1.219	250.00	43.750	0.030	0.762	6.800	30.246	0.170	4.32	0.023	0.58	6.50	MW	C	N
0.094	2.388	DD-7	0.30	7.620	0.068	1.727	7.70	1.348	0.130	3.302	1.000	4.448	0.140	3.56	0.013	0.33	10.00	HD	O	Z
0.094	2.388	LL-37	0.31	7.874	0.074	1.880	3.00	0.525	0.150	3.810	0.440	1.957	0.100	2.54	0.010	0.25	9.00	SST	C	N
0.094	2.388	10219	0.31	7.874	0.072	1.829	4.60	0.805	0.190	4.826	0.880	3.914	0.120	3.05	0.011	0.28	10.00	MW	C	N
0.094	2.388	O-56	0.31	7.874	0.070	1.778	5.40	0.945	0.160	4.064	0.850	3.781	0.160	4.06	0.012	0.30	12.00	MW	C	Z
0.094	2.388	10083	0.31	7.874	0.068	1.727	15.00	2.625	0.100	2.540	1.500	6.672	0.100	2.54	0.013	0.33	7.00	MW	C	N
0.094	2.388	O-10	0.31	7.874	0.052	1.321	82.00	14.350	0.060	1.524	5.300	23.574	0.200	5.08	0.021	0.53	8.75	MW	O	N
0.094	2.388	N-315	0.34	8.636	0.066	1.676	13.00	2.275	0.140	3.556	1.900	8.451	0.150	3.81	0.014	0.36	10.00	MW	C	N
0.094	2.388	10874	0.34	8.636	0.064	1.626	16.00	2.800	0.090	2.286	1.400	6.227	0.170	4.32	0.015	0.38	10.30	SST	C	N
0.094	2.388	10932	0.34	8.636	0.062	1.575	24.00	4.200	0.100	2.540	2.500	11.120	0.180	4.57	0.016	0.41	10.30	MW	C	GI
0.094	2.388	S-1526	0.34	8.636	0.060	1.524	35.00	6.125	0.060	1.524	2.000	8.896	0.160	4.06	0.017	0.43	8.50	SST	C	N
0.094	2.388	11113	0.34	8.636	0.058	1.473	43.00	7.525	0.080	2.032	3.500	15.568	0.200	5.08	0.018	0.46	10.00	MW	C	N
0.094	2.388	M-56	0.34	8.636	0.052	1.321	62.00	10.850	0.060	1.524	3.500	15.568	0.270	6.86	0.021	0.53	12.00	SST	C	N
0.094	2.388	FF-33	0.38	9.652	0.070	1.778	5.70	0.998	0.210	5.334	1.200	5.338	0.150	3.81	0.012	0.30	11.50	MW	C	N
0.094	2.388	LL-2	0.38	9.652	0.070	1.778	2.00	0.350	0.160	4.064	0.310	1.379	0.220	5.59	0.012	0.30	17.00	MW	C	Z
0.094	2.388	3778	0.38	9.652	0.066	1.676	13.00	2.275	0.140	3.556	1.900	8.451	0.150	3.81	0.014	0.36	10.00	MW	C	Z
0.094	2.388	N-15	0.41	10.414	0.074	1.880	2.90	0.508	0.240	6.096	0.690	3.069	0.120	3.05	0.010	0.25	10.50	MW	C	N
0.094	2.388	V-92	0.41	10.414	0.058	1.473	43.00	7.525	0.080	2.032	3.500	15.568	0.200	5.08	0.018	0.46	10.00	MW	C	N
0.094	2.388	11127	0.44	11.176	0.066	1.676	9.00	1.575	0.210	5.334	1.900	8.451	0.210	5.33	0.014	0.36	14.00	MW	C	N
0.094	2.388	O-8	0.44	11.176	0.064	1.626	15.00	2.625	0.140	3.556	2.100	9.341	0.200	5.08	0.015	0.38	12.00	MW	C	N
0.094	2.388	2541	0.44	11.176	0.062	1.575	18.00	3.150	0.140	3.556	2.500	11.120	0.220	5.59	0.016	0.41	13.00	MW	C	Z
0.094	2.388	N-40	0.44	11.176	0.062	1.575	17.00	2.975	0.150	3.810	2.500	11.120	0.240	6.10	0.016	0.41	14.00	MW	C	Z
0.094	2.388	N-26	0.44																	




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.094	2.388	00-23	0.75	19.050	0.066	1.676	6.00	1.050	0.310	7.874	1.900	8.451	0.290	7.37	0.014	0.36	20.00	MW	C	BO
0.094	2.388	4214	0.81	20.574	0.074	1.880	0.62	0.109	0.390	9.906	0.240	1.068	0.420	10.67	0.010	0.25	41.00	MW	C	N
0.094	2.388	00-13	0.94	23.876	0.074	1.880	0.88	0.154	0.500	12.700	0.440	1.957	0.270	6.86	0.010	0.25	26.00	SST	C	N
0.094	2.388	NN-25	1.00	25.400	0.064	1.626	5.40	0.945	0.380	9.652	2.100	9.341	0.430	10.92	0.015	0.38	27.50	MW	O	N
0.094	2.388	DD-59	1.13	28.702	0.074	1.880	0.57	0.100	0.720	18.288	0.400	1.779	0.410	10.41	0.010	0.25	40.00	SST	C	N
0.094	2.388	RR-21	1.19	30.226	0.074	1.880	0.96	0.168	0.460	11.684	0.440	1.957	0.250	6.35	0.010	0.25	24.00	SST	C	N
0.094	2.388	G-40	1.31	33.274	0.064	1.626	3.80	0.665	0.540	13.716	2.100	9.341	0.630	16.00	0.015	0.38	41.00	MW	C	Z
0.1	2.540	A9-8	0.19	4.826	0.076	1.930	11.00	1.925	0.100	2.540	1.100	4.893	0.080	2.03	0.012	0.30	6.00	MW	C	Z
0.1	2.540	B2-43	0.20	5.080	0.080	2.032	3.90	0.683	0.120	3.048	0.490	2.180	0.080	2.03	0.010	0.25	7.00	MW	C	N
0.1	2.540	10434	0.22	5.588	0.086	2.184	0.86	0.151	0.160	4.064	0.140	0.623	0.060	1.52	0.007	0.18	7.00	MW	C	N
0.1	2.540	12479	0.22	5.588	0.074	1.880	14.00	2.450	0.070	1.778	0.900	4.003	0.080	2.03	0.013	0.33	6.00	SST	C	N
0.1	2.540	A9-16	0.25	6.350	0.082	2.083	2.30	0.403	0.170	4.318	0.390	1.735	0.080	2.03	0.009	0.23	7.50	MW	C	N
0.1	2.540	00-41	0.31	7.874	0.076	1.930	6.30	1.103	0.110	2.794	0.710	3.158	0.110	2.79	0.012	0.30	8.00	SST	C	N
0.1	2.540	10007	0.34	8.636	0.068	1.727	18.00	3.150	0.130	3.302	2.300	10.230	0.190	4.83	0.016	0.41	11.00	MW	C	N
0.1	2.540	00-25	0.38	9.652	0.060	1.524	57.00	9.975	0.050	1.270	2.900	12.899	0.200	5.08	0.020	0.51	9.00	SST	C	N
0.1	2.540	NN-7	0.44	11.176	0.060	1.524	35.00	6.125	0.080	2.032	2.900	12.899	0.250	6.35	0.020	0.51	11.50	SST	O	N
0.105	2.667	BB-31	0.28	7.112	0.089	2.261	0.86	0.151	0.200	5.080	0.170	0.756	0.080	2.03	0.008	0.20	8.50	SST	C	N
0.109	2.769	A9-10	0.13	3.302	0.065	1.651	227.00	39.725	0.020	0.508	3.400	15.123	0.110	2.79	0.022	0.56	4.00	SST	C	N
0.109	2.769	N-17	0.16	4.064	0.101	2.565	0.03	0.005	0.100	2.540	0.003	0.013	0.050	1.27	0.004	0.10	12.00	SST	C	N
0.109	2.769	EE-23	0.17	4.318	0.069	1.753	124.00	21.700	0.030	0.762	4.100	18.237	0.110	2.79	0.020	0.51	4.00	MW	C	GI
0.109	2.769	L-71	0.19	4.826	0.093	2.362	1.10	0.193	0.120	3.048	0.140	0.623	0.060	1.52	0.008	0.20	7.00	MW	C	Z
0.109	2.769	2500	0.19	4.826	0.089	2.261	3.70	0.648	0.120	3.048	0.440	1.957	0.070	1.78	0.010	0.25	6.00	MW	C	Z
0.109	2.769	B15-29	0.22	5.588	0.091	2.311	1.30	0.228	0.130	3.302	0.170	0.756	0.090	2.29	0.009	0.23	9.00	MW	C	Z
0.109	2.769	JJ-20	0.25	6.350	0.093	2.362	0.99	0.173	0.190	4.826	0.180	0.801	0.060	1.52	0.008	0.20	7.00	SST	C	N
0.109	2.769	3722	0.25	6.350	0.089	2.261	2.50	0.438	0.160	4.064	0.400	1.779	0.090	2.29	0.010	0.25	8.00	MW	C	N
0.109	2.769	JJ-1	0.25	6.350	0.089	2.261	4.30	0.753	0.090	2.286	0.380	1.690	0.060	1.52	0.010	0.25	5.00	SST	C	N
0.109	2.769	N-9	0.25	6.350	0.085	2.159	5.30	0.928	0.120	3.048	0.660	2.936	0.100	2.54	0.012	0.30	7.50	SST	C	N
0.109	2.769	V-70	0.25	6.350	0.081	2.057	5.90	1.033	0.050	1.270	0.320	1.423	0.200	5.08	0.014	0.36	13.00	MW	C	N
0.109	2.769	B-21	0.25	6.350	0.079	2.007	25.00	4.375	0.050	1.270	1.200	5.338	0.090	2.29	0.015	0.38	5.00	SST	C	N
0.109	2.769	O-118	0.28	7.112	0.091	2.311	1.30	0.228	0.200	5.080	0.270	1.201	0.080	2.03	0.009	0.23	9.00	MW	CG	N
0.109	2.769	O-5	0.28	7.112	0.085	2.159	6.50	1.138	0.160	4.064	1.000	4.448	0.100	2.54	0.012	0.30	7.00	MW	C	N
0.109	2.769	A15-49	0.28	7.112	0.073	1.854	33.00	5.775	0.090	2.286	3.000	13.344	0.140	3.56	0.018	0.46	8.00	MW	CG	N
0.109	2.769	QQ-11	0.28	7.112	0.067	1.702	59.00	10.325	0.050	1.270	3.100	13.789	0.190	4.83	0.021	0.53	8.00	SST	C	N
0.109	2.769	12527	0.30	7.620	0.079	2.007	15.00	2.625	0.120	3.048	1.800	8.006	0.140	3.56	0.015	0.38	8.00	MW	C	N
0.109	2.769	B15-45	0.31	7.874	0.095	2.413	0.58	0.102	0.240	6.096	0.140	0.623	0.060	1.52	0.007	0.18	7.00	SST	C	N
0.109	2.769	S-1089	0.31	7.874	0.091	2.311	1.60	0.280	0.170	4.318	0.280	1.245	0.070	1.78	0.009	0.23	7.00	SST	C	N
0.109	2.769	G-16	0.31	7.874	0.085	2.159	3.20	0.560	0.170	4.318	0.530	2.357	0.140	3.56	0.012	0.30	11.00	SST	C	N
0.109	2.769	BB-12	0.31	7.874	0.083	2.108	5.80	1.015	0.140	3.556	0.830	3.692	0.130	3.30	0.013	0.33	9.00	SST	C	N
0.109	2.769	N-1	0.31	7.874	0.081	2.057	9.90	1.733	0.160	4.064	1.600	7.117	0.130	3.30	0.014	0.36	8.50	MW	CG	GI
0.109	2.769	12531	0.31	7.874	0.079	2.007	17.50	3.063	0.110	2.794	1.800	8.006	0.120	3.05	0.015	0.38	7.00	MW	C	N
0.109	2.769	BB-14	0.31	7.874	0.069	1.753	50.00	8.750	0.080	2.032	4.100	18.237	0.190	4.83	0.020	0.51	8.50	MW	C	N
0.109	2.769	12534	0.34	8.636	0.093	2.362	0.66	0.116	0.260	6.604	0.170	0.756	0.080	2.03	0.008	0.20	9.50	SST	C	N
0.109	2.769	12454	0.34	8.636	0.085	2.159	4.80	0.840	0.140	3.556	0.660	2.936	0.110	2.79	0.012	0.30	8.00	SST	C	N
0.109	2.769	00-26	0.34	8.636	0.073	1.854	22.00	3.850	0.090	2.286	2.000	8.896	0.200	5.08	0.018	0.46	10.00	SST	C	N
0.109	2.769	J-48	0.34	8.636	0.069	1.753	33.00	5.775	0.080	2.032	2.700	12.010	0.260	6.60	0.020	0.51	12.00	MW	C	N
0.109	2.769	LL-63	0.34	8.636	0.065	1.651	74.00	12.950	0.050	1.270	3.600	16.013	0.200	5.08	0.022	0.56	8.00	SST	C	N
0.109	2.769	A12-33	0.38	9.652	0.093	2.362	0.71	0.124	0.290	7.366	0.200	0.890	0.090	2.29	0.008	0.20	10.00	MW	C	N
0.109	2.769	KK-10	0.38	9.652	0.071	1.803	33.00	5.775	0.070	1.778	2.400	10.675	0.190	4.83	0.019	0.48	9.00	SST	C	N
0.109	2.769	A9-17	0.38	9.652	0.069	1.753	59.00	10.325	0.070	1.778	4.100	18.237	0.170	4.32	0.020	0.51	7.50	MW	C	N
0.109	2.769	2937	0.41	10.414	0.087	2.210	1.80	0.315	0.240	6.096	0.420	1.868	0.170	4.32	0.011	0.28	14.50	MW	C	Z
0.109	2.769	1501	0.44	11.176	0.065	1.651	49.00	8.575	0.110	2.794	5.400	24.019	0.300	7.62	0.022	0.56	12.50	MW	C	Z
0.109	2.769	B2-27	0.45	11.430	0.077	1.956	9.00	1.575	0.200	5.080	1.800	8.006	0.260	6.60	0.016	0.41	15.00	MW	C	Z
0.109	2.769	S-829	0.47	11.938	0.071	1.803	32.00	5.600	0.070	1.778	2.400	10.675	0.190	4.83	0.019	0.48	9.00	SST	C	N
0.109	2.769	L-2	0.47	11.938	0.069	1.753	27.00	4.725	0.150	3.810	4.100	18.237	0.300	7.62	0.020	0.51	14.00	MW	C	GI
0.109	2.769	N-69	0.47	11.938	0.065	1.651	57.00	9.975	0.0											




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh								
0.109	2.769	M-78	1.09	27.686	0.079	2.007	3.80	0.665	0.310	7.874	1.200	5.338	0.350	8.89	0.015	0.38	22.00	SST	C	N
0.109	2.769	DD-45	1.13	28.702	0.085	2.159	1.40	0.245	0.460	11.684	0.660	2.936	0.280	7.11	0.012	0.30	22.00	SST	C	N
0.109	2.769	GG-65	1.13	28.702	0.077	1.956	5.10	0.893	0.280	7.112	1.400	6.227	0.370	9.40	0.016	0.41	22.00	SST	C	N
0.109	2.769	KK-13	1.13	28.702	0.077	1.956	3.10	0.543	0.470	11.938	1.400	6.227	0.660	16.76	0.016	0.41	40.00	MW	C	Z
0.109	2.769	3550	1.19	30.226	0.085	2.159	1.40	0.245	0.760	19.304	1.000	4.448	0.320	8.13	0.012	0.30	26.00	MW	C	GI
0.109	2.769	B18-150	1.25	31.750	0.087	2.210	0.77	0.135	0.900	22.860	0.690	3.069	0.350	8.89	0.011	0.28	31.00	MW	C	N
0.109	2.769	2506	1.25	31.750	0.083	2.108	1.90	0.333	0.700	17.780	1.300	5.782	0.360	9.14	0.013	0.33	27.00	MW	C	GI
0.109	2.769	U-70	1.31	33.274	0.077	1.956	5.90	1.033	0.370	9.398	2.200	9.786	0.350	8.89	0.016	0.41	22.00	MW	CG	N
0.109	2.769	LL-80	1.31	33.274	0.073	1.854	8.70	1.523	0.230	5.842	2.000	8.896	0.410	10.41	0.018	0.46	22.00	SST	C	N
0.114	2.896	GG-7	0.16	4.064	0.090	2.286	8.10	1.418	0.080	2.032	0.630	2.802	0.070	1.78	0.012	0.30	5.00	SST	C	N
0.114	2.896	00-7	0.16	4.064	0.070	1.778	192.00	33.600	0.020	0.508	3.500	15.568	0.110	2.79	0.022	0.56	4.00	SST	C	N
0.114	2.896	V-79	0.25	6.350	0.082	2.083	15.00	2.625	0.070	1.778	1.100	4.893	0.180	4.57	0.016	0.41	10.30	MW	C	N
0.114	2.896	10442	0.31	7.874	0.086	2.184	9.60	1.680	0.160	4.064	1.600	7.117	0.120	3.05	0.014	0.36	7.75	MW	C	N
0.114	2.896	B12-39	0.44	11.176	0.074	1.880	30.00	5.250	0.090	2.286	2.600	11.565	0.220	5.59	0.020	0.51	10.00	SST	C	N
0.114	2.896	10909	1.00	25.400	0.094	2.388	0.91	0.159	0.630	16.002	0.580	2.580	0.170	4.32	0.010	0.25	16.00	MW	C	Z
0.114	2.896	A11-5	1.34	34.036	0.068	1.727	12.00	2.100	0.330	8.382	3.900	17.347	0.990	25.15	0.023	0.58	42.00	SST	C	N
0.117	2.972	12747	0.27	6.858	0.083	2.108	21.00	3.675	0.080	2.032	1.600	7.117	0.140	3.56	0.017	0.43	7.00	SST	C	N
0.12	3.048	70109	0.19	4.826	0.088	2.235	26.00	4.550	0.080	2.032	2.000	8.896	0.080	2.03	0.016	0.41	5.25	MW	CG	N
0.12	3.048	70109S	0.19	4.826	0.088	2.235	22.00	3.850	0.060	1.524	1.300	5.782	0.080	2.03	0.016	0.41	5.25	SST	CG	N
0.12	3.048	70131	0.19	4.826	0.084	2.134	41.00	7.175	0.070	1.778	2.800	12.454	0.100	2.54	0.018	0.46	5.50	MW	CG	N
0.12	3.048	70131S	0.19	4.826	0.084	2.134	35.00	6.125	0.050	1.270	1.900	8.451	0.100	2.54	0.018	0.46	5.50	SST	CG	N
0.12	3.048	70058	0.25	6.350	0.100	2.540	3.20	0.560	0.170	4.318	0.550	2.446	0.050	1.27	0.010	0.25	5.38	MW	CG	N
0.12	3.048	70074	0.25	6.350	0.096	2.438	6.30	1.103	0.150	3.810	0.940	4.181	0.070	1.78	0.012	0.30	5.75	MW	CG	N
0.12	3.048	70074S	0.25	6.350	0.096	2.438	5.50	0.963	0.110	2.794	0.600	2.669	0.070	1.78	0.012	0.30	5.75	SST	CG	N
0.12	3.048	70090	0.25	6.350	0.092	2.337	11.00	1.925	0.130	3.302	1.500	6.672	0.090	2.29	0.014	0.36	6.13	MW	CG	N
0.12	3.048	70090S	0.25	6.350	0.092	2.337	9.80	1.715	0.100	2.540	0.940	4.181	0.090	2.29	0.014	0.36	6.13	SST	CG	N
0.12	3.048	70110	0.25	6.350	0.088	2.235	18.00	3.150	0.110	2.794	2.000	8.896	0.110	2.79	0.016	0.41	6.75	MW	CG	N
0.12	3.048	70110S	0.25	6.350	0.088	2.235	15.00	2.625	0.090	2.286	1.300	5.782	0.110	2.79	0.016	0.41	6.75	SST	CG	N
0.12	3.048	B3-56	0.25	6.350	0.088	2.235	15.00	2.625	0.090	2.286	1.300	5.782	0.110	2.79	0.016	0.41	6.88	SST	CG	N
0.12	3.048	70132	0.25	6.350	0.084	2.134	28.00	4.900	0.100	2.540	2.800	12.454	0.130	3.30	0.018	0.46	7.00	MW	CG	N
0.12	3.048	70132S	0.25	6.350	0.084	2.134	25.00	4.375	0.080	2.032	1.900	8.451	0.130	3.30	0.018	0.46	7.00	SST	CG	N
0.12	3.048	70153	0.25	6.350	0.080	2.032	46.00	8.050	0.080	2.032	3.800	16.902	0.140	3.56	0.020	0.51	7.00	MW	CG	N
0.12	3.048	70153S	0.25	6.350	0.080	2.032	40.00	7.000	0.060	1.524	2.500	11.20	0.140	3.56	0.020	0.51	7.00	SST	CG	N
0.12	3.048	70171	0.25	6.350	0.076	1.930	70.00	12.250	0.070	1.778	5.000	22.240	0.160	4.06	0.022	0.56	7.13	MW	CG	N
0.12	3.048	70171S	0.25	6.350	0.076	1.930	61.00	10.675	0.050	1.270	3.300	14.678	0.160	4.06	0.022	0.56	7.13	SST	CG	N
0.12	3.048	70190	0.25	6.350	0.072	1.829	108.00	18.900	0.060	1.524	6.400	28.467	0.170	4.32	0.024	0.61	7.00	MW	CG	N
0.12	3.048	70190S	0.25	6.350	0.072	1.829	94.00	16.450	0.050	1.270	4.200	18.682	0.170	4.32	0.024	0.61	7.00	SST	CG	N
0.12	3.048	70059	0.31	7.874	0.100	2.540	2.50	0.438	0.220	5.588	0.550	2.446	0.060	1.52	0.010	0.25	6.38	MW	CG	N
0.12	3.048	70059S	0.31	7.874	0.100	2.540	2.10	0.368	0.160	4.064	0.350	1.557	0.060	1.52	0.010	0.25	6.38	SST	CG	N
0.12	3.048	70075	0.31	7.874	0.096	2.438	5.00	0.875	0.190	4.826	0.940	4.181	0.080	2.03	0.012	0.30	6.75	MW	CG	N
0.12	3.048	70075S	0.31	7.874	0.096	2.438	4.30	0.753	0.140	3.556	0.600	2.669	0.080	2.03	0.012	0.30	6.75	SST	CG	N
0.12	3.048	70091	0.31	7.874	0.092	2.337	8.80	1.540	0.170	4.318	1.500	6.672	0.100	2.54	0.014	0.36	7.25	MW	CG	N
0.12	3.048	70091S	0.31	7.874	0.092	2.337	7.70	1.348	0.120	3.048	0.940	4.181	0.100	2.54	0.014	0.36	7.25	SST	CG	N
0.12	3.048	70111	0.31	7.874	0.088	2.235	14.00	2.450	0.140	3.556	2.000	8.896	0.130	3.30	0.016	0.41	8.00	MW	CG	N
0.12	3.048	70111S	0.31	7.874	0.088	2.235	12.00	2.100	0.110	2.794	1.300	5.782	0.130	3.30	0.016	0.41	8.00	SST	CG	N
0.12	3.048	70133	0.31	7.874	0.084	2.134	22.00	3.850	0.130	3.302	2.800	12.454	0.150	3.81	0.018	0.46	8.50	MW	CG	N
0.12	3.048	70133S	0.31	7.874	0.084	2.134	19.00	3.325	0.100	2.540	1.900	8.451	0.150	3.81	0.018	0.46	8.50	SST	CG	N
0.12	3.048	70154	0.31	7.874	0.080	2.032	35.00	6.125	0.110	2.794	3.800	16.902	0.170	4.32	0.020	0.51	8.50	MW	CG	N
0.12	3.048	70154S	0.31	7.874	0.080	2.032	31.00	5.425	0.080	2.032	2.500	11.20	0.170	4.32	0.020	0.51	8.50	SST	CG	N
0.12	3.048	70172	0.31	7.874	0.076	1.930	54.00	9.450	0.090	2.286	5.000	22.240	0.190	4.83	0.022	0.56	8.63	MW	CG	N
0.12	3.048	70172S	0.31	7.874	0.076	1.930	47.00	8.225	0.070	1.778	3.300	14.678	0.190	4.83	0.022	0.56	8.63	SST	CG	N
0.12	3.048	70191	0.31	7.874	0.072	1.829	83.00	14.525	0.080	2.032	6.400	28.467	0.200	5.08	0.024	0.61	8.50	MW	CG	N
0.12	3.048	70191S	0.31	7.874	0.072	1.829	72.00	12.600	0.060	1.524	4.200	18.682	0.200	5.08	0.024	0.61	8.50	SST	CG	N
0.12	3.048	70060	0.38	9.652	0.100	2.540	2.00	0.350	0.270	6.858	0.550	2.446	0.070	1.78	0.010	0.25	7.38	MW	CG	N
0.12	3																			




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.12	3.048	70135S	0.44	11.176	0.084	2.134	13.00	2.275	0.140	3.556	1.900	8.451	0.200	5.08	0.018	0.46	11.30	SST	CG	N
0.12	3.048	70156	0.44	11.176	0.080	2.032	24.00	4.200	0.160	4.064	3.800	16.902	0.230	5.84	0.020	0.51	11.60	MW	CG	N
0.12	3.048	70156S	0.44	11.176	0.080	2.032	21.00	3.675	0.120	3.048	2.500	11.120	0.230	5.84	0.020	0.51	11.60	SST	CG	N
0.12	3.048	70174	0.44	11.176	0.076	1.930	36.00	6.300	0.140	3.556	5.000	22.240	0.260	6.60	0.022	0.56	11.90	MW	CG	N
0.12	3.048	70174S	0.44	11.176	0.076	1.930	32.00	5.600	0.100	2.540	3.300	14.678	0.260	6.60	0.022	0.56	11.90	SST	CG	N
0.12	3.048	70193	0.44	11.176	0.072	1.829	55.00	9.625	0.120	3.048	6.400	28.467	0.280	7.11	0.024	0.61	11.80	MW	CG	N
0.12	3.048	70193S	0.44	11.176	0.072	1.829	48.00	8.400	0.090	2.286	4.200	18.682	0.280	7.11	0.024	0.61	11.80	SST	CG	N
0.12	3.048	70062	0.50	12.700	0.100	2.540	1.50	0.263	0.370	9.398	0.550	2.446	0.090	2.29	0.010	0.25	9.25	MW	CG	N
0.12	3.048	70062S	0.50	12.700	0.100	2.540	1.30	0.228	0.270	6.858	0.350	1.557	0.090	2.29	0.010	0.25	9.25	SST	CG	N
0.12	3.048	70078	0.50	12.700	0.096	2.438	3.00	0.525	0.310	7.874	0.940	4.181	0.120	3.05	0.012	0.30	9.88	MW	CG	N
0.12	3.048	70078S	0.50	12.700	0.096	2.438	2.60	0.455	0.230	5.842	0.600	2.669	0.120	3.05	0.012	0.30	9.88	SST	CG	N
0.12	3.048	70094	0.50	12.700	0.092	2.337	5.20	0.910	0.280	7.112	1.500	6.672	0.150	3.81	0.014	0.36	10.90	MW	CG	N
0.12	3.048	70094S	0.50	12.700	0.092	2.337	4.50	0.788	0.210	5.334	0.940	4.181	0.150	3.81	0.014	0.36	10.90	SST	CG	N
0.12	3.048	70114	0.50	12.700	0.088	2.235	8.40	1.470	0.240	6.096	2.000	8.896	0.190	4.83	0.016	0.41	12.00	MW	CG	N
0.12	3.048	70114S	0.50	12.700	0.088	2.235	7.30	1.278	0.180	4.572	1.300	5.782	0.190	4.83	0.016	0.41	12.00	SST	CG	N
0.12	3.048	70136	0.50	12.700	0.084	2.134	13.00	2.275	0.210	5.334	2.800	12.454	0.230	5.84	0.018	0.46	12.90	MW	CG	N
0.12	3.048	70136S	0.50	12.700	0.084	2.134	11.00	1.925	0.160	4.064	1.900	8.451	0.230	5.84	0.018	0.46	12.90	SST	CG	N
0.12	3.048	70157	0.50	12.700	0.080	2.032	21.00	3.675	0.180	4.572	3.800	16.902	0.260	6.60	0.020	0.51	13.00	MW	CG	N
0.12	3.048	70157S	0.50	12.700	0.080	2.032	18.00	3.150	0.140	3.556	2.500	11.120	0.260	6.60	0.020	0.51	13.00	SST	CG	N
0.12	3.048	70175	0.50	12.700	0.076	1.930	31.00	5.425	0.160	4.064	5.000	22.240	0.300	7.62	0.022	0.56	13.50	MW	CG	N
0.12	3.048	70175S	0.50	12.700	0.076	1.930	27.00	4.725	0.120	3.048	3.300	14.678	0.300	7.62	0.022	0.56	13.50	SST	CG	N
0.12	3.048	70194	0.50	12.700	0.072	1.829	48.00	8.400	0.130	3.302	6.400	28.467	0.320	8.13	0.024	0.61	13.30	MW	CG	N
0.12	3.048	70194S	0.50	12.700	0.072	1.829	42.00	7.350	0.100	2.540	4.200	18.682	0.320	8.13	0.024	0.61	13.30	SST	CG	N
0.12	3.048	70063	0.56	14.224	0.100	2.540	1.40	0.245	0.390	9.906	0.550	2.446	0.100	2.54	0.010	0.25	9.75	MW	CG	N
0.12	3.048	70063S	0.56	14.224	0.100	2.540	1.20	0.210	0.290	7.366	0.350	1.557	0.100	2.54	0.010	0.25	9.75	SST	CG	N
0.12	3.048	70079	0.56	14.224	0.096	2.438	2.60	0.455	0.360	9.144	0.940	4.181	0.130	3.30	0.012	0.30	11.10	MW	CG	N
0.12	3.048	70079S	0.56	14.224	0.096	2.438	2.30	0.403	0.270	6.858	0.600	2.669	0.130	3.30	0.012	0.30	11.10	SST	CG	N
0.12	3.048	70095	0.56	14.224	0.092	2.337	4.60	0.805	0.320	8.128	1.500	6.672	0.170	4.32	0.014	0.36	12.10	MW	CG	N
0.12	3.048	70095S	0.56	14.224	0.092	2.337	4.00	0.700	0.240	6.096	0.940	4.181	0.170	4.32	0.014	0.36	12.10	SST	CG	N
0.12	3.048	70115	0.56	14.224	0.088	2.235	7.40	1.295	0.270	6.858	2.000	8.896	0.210	5.33	0.016	0.41	13.40	MW	CG	N
0.12	3.048	70115S	0.56	14.224	0.088	2.235	6.40	1.120	0.210	5.334	1.300	5.782	0.210	5.33	0.016	0.41	13.40	SST	CG	N
0.12	3.048	70137	0.56	14.224	0.084	2.134	11.00	1.925	0.240	6.096	2.800	12.454	0.260	6.60	0.018	0.46	14.40	MW	CG	N
0.12	3.048	70137S	0.56	14.224	0.084	2.134	10.00	1.750	0.190	4.826	1.900	8.451	0.260	6.60	0.018	0.46	14.40	SST	CG	N
0.12	3.048	70158	0.56	14.224	0.080	2.032	18.00	3.150	0.210	5.334	3.800	16.902	0.290	7.37	0.020	0.51	14.60	MW	CG	N
0.12	3.048	70158S	0.56	14.224	0.080	2.032	16.00	2.800	0.160	4.064	2.500	11.120	0.290	7.37	0.020	0.51	14.60	SST	CG	N
0.12	3.048	70176	0.56	14.224	0.076	1.930	28.00	4.900	0.180	4.572	5.000	22.240	0.330	8.38	0.022	0.56	14.80	MW	CG	N
0.12	3.048	70176S	0.56	14.224	0.076	1.930	24.00	4.200	0.140	3.556	3.300	14.678	0.330	8.38	0.022	0.56	14.80	SST	CG	N
0.12	3.048	70195	0.56	14.224	0.072	1.829	42.00	7.350	0.150	3.810	6.400	28.467	0.350	8.89	0.024	0.61	14.80	MW	CG	N
0.12	3.048	70195S	0.56	14.224	0.072	1.829	37.00	6.475	0.120	3.048	4.200	18.682	0.350	8.89	0.024	0.61	14.80	SST	CG	N
0.12	3.048	70064	0.63	16.002	0.100	2.540	1.20	0.210	0.460	11.684	0.550	2.446	0.110	2.79	0.010	0.25	11.00	SST	CG	N
0.12	3.048	70064S	0.63	16.002	0.100	2.540	1.00	0.175	0.340	8.636	0.350	1.557	0.110	2.79	0.010	0.25	11.00	SST	CG	N
0.12	3.048	70080	0.63	16.002	0.096	2.438	2.40	0.420	0.390	9.906	0.940	4.181	0.140	3.56	0.012	0.30	11.90	MW	CG	N
0.12	3.048	70080S	0.63	16.002	0.096	2.438	2.10	0.368	0.290	7.366	0.600	2.669	0.140	3.56	0.012	0.30	11.90	SST	CG	N
0.12	3.048	70096	0.63	16.002	0.092	2.337	4.10	0.718	0.360	9.144	1.500	6.672	0.190	4.83	0.014	0.36	13.30	MW	CG	N
0.12	3.048	70096S	0.63	16.002	0.092	2.337	3.60	0.630	0.260	6.604	0.940	4.181	0.190	4.83	0.014	0.36	13.30	SST	CG	N
0.12	3.048	70116	0.63	16.002	0.088	2.235	6.60	1.155	0.300	7.620	2.000	8.896	0.240	6.10	0.016	0.41	14.80	MW	CG	N
0.12	3.048	70116S	0.63	16.002	0.088	2.235	5.70	0.998	0.230	5.842	1.300	5.782	0.240	6.10	0.016	0.41	14.80	SST	CG	N
0.12	3.048	70138	0.63	16.002	0.084	2.134	11.00	1.925	0.260	6.604	2.800	12.454	0.270	6.86	0.018	0.46	15.10	MW	CG	N
0.12	3.048	70138S	0.63	16.002	0.084	2.134	9.40	1.645	0.200	5.080	1.900	8.451	0.270	6.86	0.018	0.46	15.10	SST	CG	N
0.12	3.048	70159	0.63	16.002	0.080	2.032	16.00	2.800	0.230	5.842	3.800	16.902	0.320	8.13	0.020	0.51	16.10	MW	CG	N
0.12	3.048	70159S	0.63	16.002	0.080	2.032	14.00	2.450	0.180	4.572	2.500	11.120	0.320	8.13	0.020	0.51	16.10	SST	CG	N
0.12	3.048	70177	0.63	16.002	0.076	1.930	25.00	4.375	0.200	5.080	5.000	22.240	0.360	9.14	0.022	0.56	16.40	MW	CG	N
0.12	3.048	70177S	0.63	16.002	0.076	1.930	22.00	3.850	0.150	3.810	3.300	14.678	0.360	9.14	0.022	0.56	16.40	SST	CG	N
0.12	3.048	70196	0.63	16.002	0.072	1.829	38.00	6.650	0.170	4.318	6.400	28.467								




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh
0.12	3.048	70140S	0.75 19.050	0.084 2.134	7.40 1.295	0.250 6.350	1.900 8.451	0.340 8.64	0.018 0.46	18.80	SST	CG N
0.12	3.048	70161	0.75 19.050	0.080 2.032	13.00 2.275	0.280 7.112	3.800 16.902	0.390 9.91	0.020 0.51	19.30	MW	CG N
0.12	3.048	70161S	0.75 19.050	0.080 2.032	12.00 2.100	0.220 5.588	2.500 11.120	0.390 9.91	0.020 0.51	19.30	SST	CG N
0.12	3.048	70179	0.75 19.050	0.076 1.930	20.00 3.500	0.250 6.350	5.000 22.240	0.440 11.18	0.022 0.56	19.80	MW	CG N
0.12	3.048	70179S	0.75 19.050	0.076 1.930	18.00 3.150	0.190 4.826	3.300 14.678	0.440 11.18	0.022 0.56	19.80	SST	CG N
0.12	3.048	70198	0.75 19.050	0.072 1.829	31.00 5.425	0.210 5.334	6.400 28.467	0.470 11.94	0.024 0.61	19.50	MW	CG N
0.12	3.048	70198S	0.75 19.050	0.072 1.829	27.00 4.725	0.160 4.064	4.200 18.682	0.470 11.94	0.024 0.61	19.50	SST	CG N
0.12	3.048	70067	0.81 20.574	0.100 2.540	0.90 0.158	0.610 15.494	0.550 2.446	0.140 3.56	0.010 0.25	14.00	MW	CG N
0.12	3.048	70067S	0.81 20.574	0.100 2.540	0.78 0.137	0.450 11.430	0.350 1.557	0.140 3.56	0.010 0.25	14.00	SST	CG N
0.12	3.048	70083	0.81 20.574	0.096 2.438	1.80 0.315	0.520 13.208	0.940 4.181	0.180 4.57	0.012 0.30	15.10	MW	CG N
0.12	3.048	70083S	0.81 20.574	0.096 2.438	1.60 0.280	0.380 9.652	0.600 2.669	0.180 4.57	0.012 0.30	15.10	SST	CG N
0.12	3.048	70099	0.81 20.574	0.092 2.337	3.10 0.543	0.480 12.192	1.500 6.672	0.240 6.10	0.014 0.36	17.00	MW	CG N
0.12	3.048	70099S	0.81 20.574	0.092 2.337	2.70 0.473	0.350 8.890	0.940 4.181	0.240 6.10	0.014 0.36	17.00	SST	CG N
0.12	3.048	70120	0.81 20.574	0.088 2.235	5.00 0.875	0.400 10.160	2.000 8.896	0.300 7.62	0.016 0.41	18.80	MW	CG N
0.12	3.048	70120S	0.81 20.574	0.088 2.235	4.30 0.753	0.300 7.620	1.300 5.782	0.300 7.62	0.016 0.41	18.80	SST	CG N
0.12	3.048	70142	0.81 20.574	0.084 2.134	7.90 1.383	0.350 8.890	2.800 12.454	0.360 9.14	0.018 0.46	20.00	MW	CG N
0.12	3.048	70142S	0.81 20.574	0.084 2.134	6.90 1.208	0.270 6.858	1.900 8.451	0.360 9.14	0.018 0.46	20.00	SST	CG N
0.12	3.048	70162	0.81 20.574	0.080 2.032	12.00 2.100	0.310 7.874	3.800 16.902	0.410 10.41	0.020 0.51	20.60	MW	CG N
0.12	3.048	70162S	0.81 20.574	0.080 2.032	11.00 1.925	0.230 5.842	2.500 11.120	0.410 10.41	0.020 0.51	20.60	SST	CG N
0.12	3.048	70180	0.81 20.574	0.076 1.930	18.00 3.150	0.270 6.858	5.000 22.240	0.470 11.94	0.022 0.56	21.50	MW	CG N
0.12	3.048	70180S	0.81 20.574	0.076 1.930	16.00 2.800	0.210 5.334	3.300 14.678	0.470 11.94	0.022 0.56	21.50	SST	CG N
0.12	3.048	70199	0.81 20.574	0.072 1.829	28.00 4.900	0.220 5.588	6.400 28.467	0.500 12.70	0.024 0.61	21.00	MW	CG N
0.12	3.048	70199S	0.81 20.574	0.072 1.829	25.00 4.375	0.170 4.318	4.200 18.682	0.500 12.70	0.024 0.61	21.00	SST	CG N
0.12	3.048	70068	0.88 22.352	0.100 2.540	0.90 0.158	0.610 15.494	0.550 2.446	0.140 3.56	0.010 0.25	14.00	MW	CG N
0.12	3.048	70068S	0.88 22.352	0.100 2.540	0.78 0.137	0.450 11.430	0.350 1.557	0.140 3.56	0.010 0.25	14.00	SST	CG N
0.12	3.048	70084	0.88 22.352	0.096 2.438	1.70 0.298	0.250 13.970	0.940 4.181	0.190 4.83	0.012 0.30	15.90	MW	CG N
0.12	3.048	70084S	0.88 22.352	0.096 2.438	1.50 0.263	0.400 10.160	0.600 2.669	0.190 4.83	0.012 0.30	15.90	SST	CG N
0.12	3.048	70100	0.88 22.352	0.092 2.337	2.90 0.508	0.510 12.954	1.500 6.672	0.250 6.35	0.014 0.36	18.00	MW	CG N
0.12	3.048	70100S	0.88 22.352	0.092 2.337	2.50 0.438	0.370 9.398	0.940 4.181	0.250 6.35	0.014 0.36	18.00	SST	CG N
0.12	3.048	70122	0.88 22.352	0.088 2.235	4.60 0.805	0.430 10.922	2.000 8.896	0.320 8.13	0.016 0.41	20.30	MW	CG N
0.12	3.048	70122S	0.88 22.352	0.088 2.235	4.00 0.700	0.330 8.382	1.300 5.782	0.320 8.13	0.016 0.41	20.30	SST	CG N
0.12	3.048	70144	0.88 22.352	0.084 2.134	7.30 1.278	0.380 9.652	2.800 12.454	0.390 9.91	0.018 0.46	21.50	MW	CG N
0.12	3.048	70144S	0.88 22.352	0.084 2.134	6.30 1.103	0.290 7.366	1.900 8.451	0.390 9.91	0.018 0.46	21.50	SST	CG N
0.12	3.048	70163	0.88 22.352	0.080 2.032	11.00 1.925	0.340 8.636	3.800 16.902	0.450 11.43	0.020 0.51	22.50	MW	CG N
0.12	3.048	70163S	0.88 22.352	0.080 2.032	9.80 1.715	0.260 6.604	2.500 11.120	0.450 11.43	0.020 0.51	22.50	SST	CG N
0.12	3.048	70182	0.88 22.352	0.076 1.930	17.00 2.975	0.290 7.366	5.000 22.240	0.500 12.70	0.022 0.56	22.90	MW	CG N
0.12	3.048	70182S	0.88 22.352	0.076 1.930	15.00 2.625	0.220 5.588	3.300 14.678	0.500 12.70	0.022 0.56	22.90	SST	CG N
0.12	3.048	70200	0.88 22.352	0.072 1.829	26.00 4.550	0.240 6.096	6.400 28.467	0.550 13.97	0.024 0.61	22.80	MW	CG N
0.12	3.048	70200S	0.88 22.352	0.072 1.829	23.00 4.025	0.190 4.826	4.200 18.682	0.550 13.97	0.024 0.61	22.80	SST	CG N
0.12	3.048	70101	0.91 23.114	0.092 2.337	8.60 1.505	0.170 4.318	1.500 6.672	0.100 2.54	0.014 0.36	7.38	MW	CG N
0.12	3.048	70101S	0.91 23.114	0.092 2.337	7.50 1.313	0.130 3.302	0.940 4.181	0.100 2.54	0.014 0.36	7.38	SST	CG N
0.12	3.048	70069	0.94 23.876	0.100 2.540	0.80 0.140	0.690 17.526	0.550 2.446	0.160 4.06	0.010 0.25	15.50	MW	CG N
0.12	3.048	70069S	0.94 23.876	0.100 2.540	0.70 0.123	0.500 12.700	0.350 1.557	0.160 4.06	0.010 0.25	15.50	SST	CG N
0.12	3.048	70085	0.94 23.876	0.096 2.438	1.50 0.263	0.630 16.002	0.940 4.181	0.210 5.33	0.012 0.30	17.80	MW	CG N
0.12	3.048	70085S	0.94 23.876	0.096 2.438	1.30 0.228	0.460 11.684	0.600 2.669	0.210 5.33	0.012 0.30	17.80	SST	CG N
0.12	3.048	70102	0.94 23.876	0.092 2.337	2.70 0.473	0.550 13.970	1.500 6.672	0.270 6.86	0.014 0.36	19.10	MW	CG N
0.12	3.048	70102S	0.94 23.876	0.092 2.337	2.40 0.420	0.400 10.160	0.940 4.181	0.270 6.86	0.014 0.36	19.10	SST	CG N
0.12	3.048	70124	0.94 23.876	0.088 2.235	4.30 0.753	0.460 11.684	2.000 8.896	0.340 8.64	0.016 0.41	21.50	MW	CG N
0.12	3.048	70124S	0.94 23.876	0.088 2.235	3.70 0.648	0.350 8.890	1.300 5.782	0.340 8.64	0.016 0.41	21.50	SST	CG N
0.12	3.048	70146	0.94 23.876	0.084 2.134	6.80 1.190	0.410 10.414	2.800 12.454	0.410 10.41	0.018 0.46	22.90	MW	CG N
0.12	3.048	70146S	0.94 23.876	0.084 2.134	5.90 1.033	0.310 7.874	1.900 8.451	0.410 10.41	0.018 0.46	22.90	SST	CG N
0.12	3.048	70164	0.94 23.876	0.080 2.032	11.00 1.925	0.360 9.144	3.800 16.902	0.480 12.19	0.020 0.51	23.80	MW	CG N
0.12	3.048	70164S	0.94 23.876	0.080 2.032	9.20 1.610	0.270 6.858	2.500 11.120	0.480 12.19	0.020 0.51	23.80	SST	CG N
0.12	3.048	70183	0.94 23.876	0.076 1.930	16.00 2.800	0.310 7.874	5.000 22.240	0.540 13.72	0.022 0.56	24.60	MW	CG N
0.12	3.048	70183S	0.94 23.876	0.076 1.930	14.00 2.450	0.240 6.096	3.300 14.678	0.540 13.72	0.022 0.56	24.60	SST	CG N
0.12	3.048	70201	0.94 23.876	0.072 1.829	24.00 4.200	0.260 6.604	6.400 28.467	0.580 14.73	0.024 0.61	24.10	MW	CG N
0.12	3.048	70201S	0.94 23.876	0.072 1.829	21.00 3.675	0.200 5.080	4.200 18.682	0.580 14.73	0.024 0.61	24.10	SST	CG N
0.12	3.048	70070	1.00 25.400	0.100 2.540	0.70 0.123	0.780 19.812	0.550 2.446	0.170 4.32	0.010 0.25	17.40	MW	CG N
0.12	3.048	70070S	1.00 25.400	0.100 2.540	0.61 0.107	0.570 14.478	0.350 1.557	0.170 4.32	0.010 0.25	17.40	SST	CG N
0.12	3.048	70086	1.00 25.400	0.096 2.438	1.50 0.263	0.630 16.002	0.940 4.181	0.210 5.33	0.012 0.30	17.80	MW	CG N
0.12	3.048	70086S	1.00 25.400	0.096 2.438	1.30 0.228	0.460 11.684	0.600 2.669	0.210 5.33	0.012 0.30	17.80	SST	CG N
0.12	3.048	70103	1.00 25.400	0.092 2.337	2.30 0.385	0.430 10.922	0.940 4.181	0.290 7.37	0.014 0.36	20.50	SST	CG N
0.12	3.048	70125	1.00 25.400	0.088 2.235	4.10 0.718	0.490 12.446	2.000 8.896	0.360 9.14	0.016 0.41	22.60	MW	CG N
0.12	3.048	70125S	1.00 25.400	0.088 2.235	3.50 0.613	0.370 9.398	1.300 5.782	0.36				




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.12	3.048	70126S	1.13	28.702	0.088	2.235	3.10	0.543	0.430	10.922	1.300	5.782	0.410	10.41	0.016	0.41	25.60	SST	CG	N
0.12	3.048	70148	1.13	28.702	0.084	2.134	5.70	0.998	0.490	12.446	2.800	12.454	0.490	12.45	0.018	0.46	27.10	MW	CG	N
0.12	3.048	70148S	1.13	28.702	0.084	2.134	4.90	0.858	0.380	9.652	1.900	8.451	0.490	12.45	0.018	0.46	27.10	SST	CG	N
0.12	3.048	70166	1.13	28.702	0.080	2.032	8.80	1.540	0.430	10.922	3.800	16.902	0.560	14.22	0.020	0.51	28.00	MW	CG	N
0.12	3.048	70166S	1.13	28.702	0.080	2.032	7.70	1.348	0.330	8.382	2.500	11.120	0.560	14.22	0.020	0.51	28.00	SST	CG	N
0.12	3.048	70185	1.13	28.702	0.076	1.930	13.00	2.275	0.370	9.398	5.000	22.240	0.630	16.00	0.022	0.56	28.80	MW	CG	N
0.12	3.048	70185S	1.13	28.702	0.076	1.930	12.00	2.100	0.280	7.112	3.300	14.678	0.630	16.00	0.022	0.56	28.80	SST	CG	N
0.12	3.048	70203	1.13	28.702	0.072	1.829	20.00	3.500	0.320	8.128	6.400	28.467	0.690	17.53	0.024	0.61	28.90	MW	CG	N
0.12	3.048	70203S	1.13	28.702	0.072	1.829	17.00	2.975	0.240	6.096	4.200	18.682	0.690	17.53	0.024	0.61	28.90	SST	CG	N
0.12	3.048	70072	1.25	31.750	0.100	2.540	0.60	0.105	0.920	23.368	0.550	2.446	0.200	5.08	0.010	0.25	20.00	MW	CG	N
0.12	3.048	70072S	1.25	31.750	0.100	2.540	0.52	0.091	0.670	17.018	0.350	1.557	0.200	5.08	0.010	0.25	20.00	SST	CG	N
0.12	3.048	70088	1.25	31.750	0.096	2.438	1.20	0.210	0.790	20.066	0.940	4.181	0.260	6.60	0.012	0.30	21.80	MW	CG	N
0.12	3.048	70088S	1.25	31.750	0.096	2.438	1.00	0.175	0.580	14.732	0.600	2.669	0.260	6.60	0.012	0.30	21.80	SST	CG	N
0.12	3.048	70105	1.25	31.750	0.092	2.337	2.00	0.350	0.740	18.796	1.500	6.672	0.350	8.89	0.014	0.36	25.10	MW	CG	N
0.12	3.048	70105S	1.25	31.750	0.092	2.337	1.70	0.298	0.540	13.716	0.940	4.181	0.350	8.89	0.014	0.36	25.10	SST	CG	N
0.12	3.048	70127	1.25	31.750	0.088	2.235	3.20	0.560	0.620	15.748	2.000	8.896	0.450	11.43	0.016	0.41	28.10	MW	CG	N
0.12	3.048	70127S	1.25	31.750	0.088	2.235	2.80	0.490	0.470	11.938	1.300	5.782	0.450	11.43	0.016	0.41	28.10	SST	CG	N
0.12	3.048	70149	1.25	31.750	0.084	2.134	5.10	0.893	0.550	13.970	2.800	12.454	0.540	13.72	0.018	0.46	30.10	MW	CG	N
0.12	3.048	70149S	1.25	31.750	0.084	2.134	4.40	0.770	0.420	10.668	1.900	8.451	0.540	13.72	0.018	0.46	30.10	SST	CG	N
0.12	3.048	70167	1.25	31.750	0.080	2.032	7.90	1.383	0.480	12.192	3.800	16.902	0.620	15.75	0.020	0.51	31.10	MW	CG	N
0.12	3.048	70167S	1.25	31.750	0.080	2.032	6.90	1.208	0.370	9.398	2.500	11.120	0.620	15.75	0.020	0.51	31.10	SST	CG	N
0.12	3.048	70186	1.25	31.750	0.076	1.930	12.00	2.100	0.420	10.668	5.000	22.240	0.720	18.29	0.022	0.56	32.50	MW	CG	N
0.12	3.048	70186S	1.25	31.750	0.076	1.930	10.00	1.750	0.320	8.128	3.300	14.678	0.720	18.29	0.022	0.56	32.50	SST	CG	N
0.12	3.048	70204	1.25	31.750	0.072	1.829	18.00	3.150	0.350	8.890	6.400	28.467	0.770	19.56	0.024	0.61	32.00	MW	CG	N
0.12	3.048	70204S	1.25	31.750	0.072	1.829	16.00	2.800	0.270	6.858	4.200	18.682	0.770	19.56	0.024	0.61	32.00	SST	CG	N
0.12	3.048	70107	1.38	35.052	0.092	2.337	1.80	0.315	0.820	20.828	1.500	6.672	0.390	9.91	0.014	0.36	27.80	MW	CG	N
0.12	3.048	70107S	1.38	35.052	0.092	2.337	1.60	0.280	0.600	15.240	0.940	4.181	0.390	9.91	0.014	0.36	27.80	SST	CG	N
0.12	3.048	70129	1.38	35.052	0.088	2.235	2.90	0.508	0.680	17.272	2.000	8.896	0.490	12.45	0.016	0.41	30.90	MW	CG	N
0.12	3.048	70129S	1.38	35.052	0.088	2.235	2.50	0.438	0.520	13.208	1.300	5.782	0.490	12.45	0.016	0.41	30.90	SST	CG	N
0.12	3.048	70151	1.38	35.052	0.084	2.134	4.60	0.805	0.610	15.494	2.800	12.454	0.590	14.99	0.018	0.46	32.90	MW	CG	N
0.12	3.048	70151S	1.38	35.052	0.084	2.134	4.00	0.700	0.460	11.684	1.900	8.451	0.590	14.99	0.018	0.46	32.90	SST	CG	N
0.12	3.048	70169	1.38	35.052	0.080	2.032	7.00	1.225	0.540	13.716	3.800	16.902	0.700	17.78	0.020	0.51	34.90	MW	CG	N
0.12	3.048	70169S	1.38	35.052	0.080	2.032	6.10	1.068	0.410	10.414	2.500	11.120	0.700	17.78	0.020	0.51	34.90	SST	CG	N
0.12	3.048	70188	1.38	35.052	0.076	1.930	11.00	1.925	0.470	11.938	5.000	22.240	0.780	19.81	0.022	0.56	35.50	MW	CG	N
0.12	3.048	70188S	1.38	35.052	0.076	1.930	9.30	1.628	0.360	9.144	3.300	14.678	0.780	19.81	0.022	0.56	35.50	SST	CG	N
0.12	3.048	70073	1.50	38.100	0.100	2.540	0.50	0.088	1.100	27.940	0.550	2.446	0.240	6.10	0.010	0.25	23.60	MW	CG	N
0.12	3.048	70073S	1.50	38.100	0.100	2.540	0.43	0.075	0.810	20.574	0.350	1.557	0.240	6.10	0.010	0.25	23.60	SST	CG	N
0.12	3.048	70089	1.50	38.100	0.096	2.438	1.00	0.175	0.940	23.876	0.940	4.181	0.310	7.87	0.012	0.30	25.60	MW	CG	N
0.12	3.048	70089S	1.50	38.100	0.096	2.438	0.87	0.152	0.690	17.526	0.600	2.669	0.310	7.87	0.012	0.30	25.60	SST	CG	N
0.12	3.048	70108	1.50	38.100	0.092	2.337	1.70	0.298	0.850	21.590	1.500	6.672	0.400	10.16	0.014	0.36	28.80	MW	CG	N
0.12	3.048	70108S	1.50	38.100	0.092	2.337	1.50	0.263	0.630	16.002	0.940	4.181	0.400	10.16	0.014	0.36	28.80	SST	CG	N
0.12	3.048	70130	1.50	38.100	0.088	2.235	2.70	0.473	0.720	18.288	2.000	8.896	0.520	13.21	0.016	0.41	32.50	MW	CG	N
0.12	3.048	70130S	1.50	38.100	0.088	2.235	2.40	0.420	0.550	13.970	1.300	5.782	0.520	13.21	0.016	0.41	32.50	SST	CG	N
0.12	3.048	70152	1.50	38.100	0.084	2.134	4.20	0.735	0.670	17.018	2.800	12.454	0.650	16.51	0.018	0.46	36.30	MW	CG	N
0.12	3.048	70152S	1.50	38.100	0.084	2.134	3.60	0.630	0.510	12.954	1.900	8.451	0.650	16.51	0.018	0.46	36.30	SST	CG	N
0.12	3.048	70170	1.50	38.100	0.080	2.032	6.50	1.138	0.590	14.986	3.800	16.902	0.750	19.05	0.020	0.51	37.60	MW	CG	N
0.12	3.048	70170S	1.50	38.100	0.080	2.032	5.60	0.980	0.450	11.430	2.500	11.120	0.750	19.05	0.020	0.51	37.60	SST	CG	N
0.12	3.048	70189	1.50	38.100	0.076	1.930	9.70	1.698	0.510	12.954	5.000	22.240	0.860	21.84	0.022	0.56	38.90	MW	CG	N
0.12	3.048	70189S	1.50	38.100	0.076	1.930	8.40	1.470	0.390	9.906	3.300	14.678	0.860	21.84	0.022	0.56	38.90	SST	CG	N
0.12	3.048	70205	1.50	38.100	0.072	1.829	15.00	2.625	0.430	10.922	6.400	28.467	0.920	23.37	0.024	0.61	38.10	MW	CG	N
0.12	3.048	70205S	1.50	38.100	0.072	1.829	13.00	2.275	0.330	8.382	4.200	18.682	0.920	23.37	0.024	0.61	38.10	SST	CG	N
0.125	3.175	DD-65	0.13	3.302	0.105	2.667	3.20	0.560	0.080	2.032	0.240	1.068	0.050	1.27	0.010	0.25	5.00	MW	C	GI
0.125	3.175	10195	0.13	3.302	0.095	2.413	36.00	6.300	0.040	1.016	1.600	7.117	0.070	1.78	0.015	0.38	3.50	MW	C	N
0.125	3.175	LL-57	0.16	4.064	0.085	2.159														




O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg. Max. Defl. Inches	Sugg. Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Fns'h
mm		mm	mm	N/mm	mm	N	mm	mm				
0.125	3.175	B-7	0.28	7.112	0.097	2.464	10.00	1.750	0.140	3.556	1.400	6.227
0.125	3.175	BB-15	0.28	7.112	0.085	2.159	40.00	7.000	0.090	2.286	3.700	16.458
0.125	3.175	B-2-6	0.30	7.620	0.093	2.362	12.00	2.100	0.150	3.810	1.700	7.562
0.125	3.175	B-3	0.31	7.874	0.101	2.565	2.30	0.403	0.170	4.318	0.390	1.735
0.125	3.175	CC-42	0.31	7.874	0.101	2.565	2.40	0.420	0.200	5.080	0.470	2.091
0.125	3.175	EE-33	0.31	7.874	0.097	2.464	3.70	0.648	0.140	3.556	1.100	4.893
0.125	3.175	B-20	0.31	7.874	0.095	2.413	9.50	1.663	0.110	2.794	1.100	4.893
0.125	3.175	M-37	0.31	7.874	0.095	2.413	8.40	1.470	0.170	4.318	1.400	6.227
0.125	3.175	B1-14	0.31	7.874	0.091	2.311	16.00	2.800	0.140	3.556	2.300	10.230
0.125	3.175	G-66	0.31	7.874	0.091	2.311	14.00	2.450	0.150	3.810	2.100	9.341
0.125	3.175	U-79	0.31	7.874	0.091	2.311	11.00	1.925	0.110	2.794	1.100	4.893
0.125	3.175	A13-23	0.31	7.874	0.089	2.261	16.00	2.800	0.110	2.794	1.800	8.006
0.125	3.175	L-91	0.31	7.874	0.083	2.108	41.00	7.175	0.100	2.540	4.200	18.682
0.125	3.175	L-1	0.31	7.874	0.081	2.057	49.00	8.575	0.100	2.540	4.800	21.350
0.125	3.175	TT-3	0.31	7.874	0.081	2.057	45.00	7.875	0.070	1.778	3.200	14.234
0.125	3.175	NN-60	0.31	7.874	0.077	1.956	93.00	16.275	0.070	1.778	6.200	27.578
0.125	3.175	KK-18	0.31	7.874	0.075	1.905	81.00	14.175	0.050	1.270	4.400	19.571
0.125	3.175	3196	0.34	8.636	0.101	2.565	3.90	0.683	0.230	5.842	0.910	4.048
0.125	3.175	FF-86	0.34	8.636	0.101	2.565	2.80	0.490	0.220	5.588	0.600	2.669
0.125	3.175	V-69	0.34	8.636	0.095	2.413	5.50	0.963	0.160	4.064	0.890	3.959
0.125	3.175	N-16	0.34	8.636	0.093	2.362	12.00	2.100	0.160	4.064	1.900	8.451
0.125	3.175	G-18	0.34	8.636	0.083	2.108	45.00	7.875	0.090	2.286	4.200	18.682
0.125	3.175	A13-21	0.34	8.636	0.079	2.007	50.00	8.750	0.070	1.778	3.600	16.013
0.125	3.175	B-57	0.34	8.636	0.073	1.854	113.00	19.775	0.060	1.524	7.300	32.470
0.125	3.175	L-11	0.38	9.652	0.099	2.515	2.70	0.473	0.210	5.334	0.570	2.535
0.125	3.175	II-94	0.38	9.652	0.095	2.413	6.80	1.190	0.150	3.810	1.100	4.893
0.125	3.175	U-9	0.38	9.652	0.095	2.413	17.00	2.975	0.080	2.032	1.200	5.338
0.125	3.175	O-15	0.38	9.652	0.093	2.362	10.00	1.750	0.180	4.572	1.900	8.451
0.125	3.175	A11-11	0.38	9.652	0.091	2.311	11.00	1.925	0.140	3.556	1.500	6.672
0.125	3.175	O-7	0.38	9.652	0.091	2.311	13.00	2.275	0.180	4.572	2.300	10.230
0.125	3.175	B1-27	0.38	9.652	0.089	2.261	13.00	2.275	0.140	3.556	1.800	8.006
0.125	3.175	G-15	0.38	9.652	0.089	2.261	14.00	2.450	0.160	4.064	2.200	9.786
0.125	3.175	H-98	0.38	9.652	0.085	2.159	22.00	3.850	0.110	2.794	2.400	10.675
0.125	3.175	Q-93	0.38	9.652	0.085	2.159	33.00	5.775	0.110	2.794	3.700	16.458
0.125	3.175	UU-14	0.38	9.652	0.085	2.159	33.00	5.775	0.110	2.794	4.600	20.461
0.125	3.175	DD-69	0.38	9.652	0.081	2.057	34.00	5.950	0.130	3.302	3.200	14.234
0.125	3.175	LL-5	0.38	9.652	0.081	2.057	38.00	6.650	0.080	2.032	4.200	12.00
0.125	3.175	S-700	0.38	9.652	0.081	2.057	33.00	5.775	0.100	2.540	3.200	14.234
0.125	3.175	A12-7	0.38	9.652	0.079	2.007	54.00	9.450	0.100	2.540	5.500	24.464
0.125	3.175	10172	0.38	9.652	0.077	1.956	56.00	9.800	0.110	2.794	6.200	27.578
0.125	3.175	G-5	0.38	9.652	0.075	1.905	102.00	17.850	0.060	1.524	6.500	28.912
0.125	3.175	NN-85	0.38	9.652	0.075	1.905	70.00	12.250	0.060	1.524	4.400	19.571
0.125	3.175	N-14	0.41	10.414	0.095	2.413	7.80	1.365	0.200	5.080	1.600	7.117
0.125	3.175	M-113	0.41	10.414	0.091	2.311	11.00	1.925	0.200	5.080	2.100	9.341
0.125	3.175	B-60	0.41	10.414	0.089	2.261	14.00	2.450	0.190	4.826	2.600	11.565
0.125	3.175	B-82	0.41	10.414	0.089	2.261	14.00	2.450	0.200	5.080	2.700	12.010
0.125	3.175	F-74	0.41	10.414	0.089	2.261	15.00	2.625	0.170	4.318	2.700	12.010
0.125	3.175	NN-13	0.41	10.414	0.081	2.057	33.00	5.775	0.100	2.540	3.200	14.234
0.125	3.175	GG-51	0.44	11.176	0.095	2.413	4.20	0.735	0.200	5.080	0.830	3.692
0.125	3.175	F-88	0.44	11.176	0.089	2.261	13.00	2.275	0.210	5.334	2.600	11.565
0.125	3.175	V-43	0.44	11.176	0.087	2.210	15.00	2.625	0.140	3.556	2.100	9.341
0.125	3.175	S-846	0.44	11.176	0.081	2.057	27.00	4.725	0.120	3.048	3.200	14.234
0.125	3.175	B12-9	0.44	11.176	0.079	2.007	37.00	6.475	0.150	3.810	5.500	24.464
0.125	3.175	W-79	0.44	11.176	0.075	1.905	62.00	10.850	0.070	1.778	4.400	19.571
0.125	3.175	10832	0.47	11.938	0.105	2.667	1.30	0.228	0.360	9.144	0.460	2.046
0.125	3.175	2765	0.47	11.938	0.093	2.362	7.70	1.348	0.250	6.350	1.900	8.451
0.125	3.175	A10-21	0.47	11.938	0.083	2.108	23.00	4.025	0.120	3.048	2.800	12.454
0.125	3.175	A13-12	0.47	11.938	0.077	1.956	47.00	8.225	0.130	3.302	6.200	27.578
0.125	3.175	11400	0.47	11.938	0.075	1.905	64.00	11.200	0.070	1.778	4.400	19.571
0.125	3.175	DD-3	0.50	12.700	0.109	2.769	0.19	0.033	0.340	8.636	0.060	0.267
0.125	3.175	B-57	0.50	12.700	0.107	2.718	0.83	0.145	0.410	10.414	0.340	1.512
0.125	3.175	10068	0.50	12.700	0.105	2.667	0.50	0.088	0.280	7.112	0.140	0.623
0.125	3.175	11123	0.50	12.700	0.105	2.667	1.10	0.193	0.390	9.906	0.430	1.913
0.125	3.175	LL-23	0.50	12.700	0.105	2.667	1.20	0.210	0.280	7.112	0.340	1.512
0.125	3.175	Q-81	0.50	12.700	0.105	2.667	0.33	0.058	0.180	4.572	0.060	0.267
0.125	3.175	B-407	0.50	12.700	0.101	2.565	2.20	0.385	0.350	8.890	0.790	3.514
0.125	3.175	B-408	0.50	12.700	0.099	2.515	3.00	0.525	0.330	8.382	1.000	4.448
0.125	3.175	U-85	0.50	12.700	0.097	2.464	3.70	0.648	0.300	7.620	1.100	4.893
0.125	3.175	S-202	0.50	12.700	0.095	2.413	7.30	1.278	0.140	3.556	1.100	4.893
0.125	3.175	3117	0.50	12.700	0.093	2.362	7.80	1.365	0.250	6.350	1.900	8.451
0.125	3.175	A14-11	0.50	12.700	0.093	2.362	6.10	1.068	0.210	5.334	1.300	5.782
0.125	3.175	B-409	0.50	12.700	0.093	2.362	7.10	1.243	0.270	6.858	1.900	8.451
0.125	3.175	G-90	0.50	12.700	0.093	2.362	7.30	1.278	0.260	6.604	1.900	8.451
0.125	3.175	S-320	0.50	12.700	0.093	2.362	6.70	1.173	0.190	4.826	1.300	5.782
0.125	3.175	A14-21	0.50	12.700	0.089	2.261	9.50	1.663	0.190	4.826	1.800	8.006
0.125	3.175	B-410	0.50	12.700	0.089	2.261	11.00	1.925	0.240	6.096	2.600	11.565
0.125	3.175	G-35	0.50	12.700	0.089	2.261	14.00	2.450	0.190	4.826	2.700	12.010
0.125	3.175	B-411	0.50	12.700	0.085	2.159	18.00	3.150	0.200	5.080	3.700	16.458
0.125	3.175	B-412	0.50	12.700	0.081	2.057	27.00	4.725	0.180	4.572	4.800	21.350
0.125	3.175	B-410	0.50	12.700	0.089	2.261	26.00	4.550	0.190	4.826		




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
0.125	3.175 S-701	0.50 12.700	0.081 2.057	24.00 4.200	0.130 3.302	3.200 14.234	0.310 7.87	0.022 0.56	13.30	SST	C	N
0.125	3.175 10904	0.53 13.462	0.107 2.718	0.35 0.061	0.350 8.890	0.120 0.534	0.190 4.83	0.009 0.23	19.50	MW	C	Z
0.125	3.175 11117	0.53 13.462	0.105 2.667	1.10 0.193	0.420 10.668	0.460 2.046	0.120 3.05	0.010 0.25	10.50	MW	C	N
0.125	3.175 A10-45	0.53 13.462	0.095 2.413	4.20 0.735	0.290 7.366	1.200 5.338	0.240 6.10	0.015 0.38	15.00	MW	C	N
0.125	3.175 A13-10	0.53 13.462	0.089 2.261	9.50 1.663	0.260 6.604	2.500 11.120	0.270 6.86	0.018 0.46	15.00	MW	CG	N
0.125	3.175 F-67	0.53 13.462	0.089 2.261	11.00 1.925	0.240 6.096	2.700 12.010	0.250 6.35	0.018 0.46	13.00	MW	C	Z
0.125	3.175 A-21	0.53 13.462	0.085 2.159	18.00 3.150	0.140 3.556	2.400 10.675	0.260 6.60	0.020 0.51	12.00	SST	C	N
0.125	3.175 B10-25	0.56 14.224	0.097 2.464	3.40 0.595	0.360 9.144	1.200 5.338	0.210 5.33	0.014 0.36	13.80	MW	C	N
0.125	3.175 J-69	0.56 14.224	0.091 2.311	7.30 1.278	0.290 7.366	2.100 9.341	0.270 6.86	0.017 0.43	15.00	MW	C	Z
0.125	3.175 L-79	0.56 14.224	0.083 2.108	15.00 2.625	0.180 4.572	2.700 12.010	0.380 9.65	0.021 0.53	18.30	MW	CG	Z
0.125	3.175 S-1012	0.59 14.986	0.099 2.515	2.30 0.403	0.320 8.128	0.730 3.247	0.190 4.83	0.013 0.33	13.30	SST	C	N
0.125	3.175 S-937	0.59 14.986	0.089 2.261	7.70 1.348	0.230 5.842	1.800 8.006	0.300 7.62	0.018 0.46	15.90	SST	C	N
0.125	3.175 G-27	0.59 14.986	0.063 1.600	133.00 23.275	0.090 2.286	12.000 53.376	0.470 11.94	0.031 0.79	14.00	MW	C	N
0.125	3.175 A-1	0.63 16.002	0.105 2.667	0.95 0.166	0.500 12.700	0.470 2.091	0.130 3.30	0.010 0.25	12.00	MW	C	N
0.125	3.175 390	0.63 16.002	0.103 2.616	1.60 0.280	0.440 11.176	0.700 3.114	0.130 3.30	0.011 0.28	11.00	MW	C	Z
0.125	3.175 A-43	0.63 16.002	0.103 2.616	1.20 0.210	0.470 11.938	0.580 2.580	0.160 4.06	0.011 0.28	13.50	MW	C	BO
0.125	3.175 N-22	0.63 16.002	0.103 2.616	1.30 0.228	0.470 11.938	0.610 2.713	0.150 3.81	0.011 0.28	13.00	MW	C	N
0.125	3.175 S-1445	0.63 16.002	0.099 2.515	1.30 0.228	0.350 8.890	0.450 2.002	0.280 7.11	0.013 0.33	21.50	SST	CG	N
0.125	3.175 B14-9	0.63 16.002	0.097 2.464	3.10 0.543	0.400 10.160	1.200 5.338	0.220 5.59	0.014 0.36	15.00	MW	C	N
0.125	3.175 J-89	0.63 16.002	0.097 2.464	3.30 0.578	0.410 10.414	1.400 6.227	0.210 5.33	0.014 0.36	14.30	MW	C	N
0.125	3.175 EE-61	0.63 16.002	0.095 2.413	4.20 0.735	0.380 9.652	1.600 7.117	0.240 6.10	0.015 0.38	15.00	MW	C	N
0.125	3.175 S-1543	0.63 16.002	0.095 2.413	4.40 0.770	0.240 6.096	1.100 4.893	0.210 5.33	0.015 0.38	13.00	SST	C	N
0.125	3.175 A10-20	0.63 16.002	0.089 2.261	11.00 1.925	0.240 6.096	2.700 12.010	0.250 6.35	0.018 0.46	12.80	MW	C	N
0.125	3.175 F-5	0.63 16.002	0.089 2.261	8.80 1.540	0.310 7.874	2.700 12.010	0.310 7.87	0.018 0.46	16.00	MW	C	Z
0.125	3.175 B1-19	0.63 16.002	0.079 2.007	25.00 4.375	0.220 5.588	5.500 24.464	0.390 9.91	0.023 0.58	17.00	MW	CG	GI
0.125	3.175 G-2	0.63 16.002	0.075 1.905	28.00 4.900	0.100 2.540	2.800 12.454	0.530 13.46	0.025 0.64	20.00	SST	C	N
0.125	3.175 2544	0.63 16.002	0.073 1.854	68.00 11.900	0.110 2.794	7.300 32.470	0.340 8.64	0.026 0.66	12.00	MW	C	Z
0.125	3.175 903	0.63 16.002	0.069 1.753	97.00 16.975	0.090 2.286	8.900 39.587	0.360 9.14	0.028 0.71	12.00	MW	C	Z
0.125	3.175 J-64	0.66 16.764	0.095 2.413	2.40 0.420	0.330 8.382	0.790 3.514	0.330 8.38	0.015 0.38	22.00	SST	CG	N
0.125	3.175 S-11	0.66 16.764	0.095 2.413	2.40 0.420	0.300 7.620	0.720 3.203	0.350 8.89	0.015 0.38	22.50	SST	C	N
0.125	3.175 3546	0.66 16.764	0.085 2.159	16.00 2.800	0.230 5.842	3.700 16.458	0.310 7.87	0.020 0.51	14.50	MW	C	Z
0.125	3.175 FF-51	0.69 17.526	0.105 2.667	0.35 0.061	0.390 9.906	0.140 0.623	0.300 7.62	0.010 0.25	29.00	MW	C	N
0.125	3.175 A-80	0.69 17.526	0.101 2.565	1.40 0.245	0.410 10.414	0.580 2.580	0.190 4.83	0.012 0.30	15.00	SST	C	N
0.125	3.175 A13-22	0.69 17.526	0.089 2.261	6.80 1.190	0.260 6.604	1.800 8.006	0.320 8.13	0.018 0.46	18.00	SST	CG	N
0.125	3.175 F-72	0.69 17.526	0.085 2.159	12.00 2.100	0.290 7.366	3.700 16.458	0.380 9.65	0.020 0.51	18.00	MW	C	Z
0.125	3.175 NN-9	0.69 17.526	0.079 2.007	22.00 3.850	0.240 6.096	5.500 24.464	0.440 11.18	0.023 0.58	19.00	MW	CG	N
0.125	3.175 J-75	0.69 17.526	0.075 1.905	26.00 4.550	0.140 3.556	3.500 15.568	0.550 13.97	0.025 0.64	21.00	SST	C	N
0.125	3.175 B4-9	0.70 17.780	0.095 2.413	4.30 0.753	0.240 6.096	1.100 4.893	0.200 5.08	0.015 0.38	13.00	SST	CG	N
0.125	3.175 B12-7	0.72 18.288	0.095 2.413	3.70 0.648	0.430 10.922	1.600 7.117	0.250 6.35	0.015 0.38	16.80	MW	CG	N
0.125	3.175 S-1687	0.73 18.542	0.095 2.413	4.00 0.700	0.270 6.858	1.100 4.893	0.230 5.84	0.015 0.38	14.00	SST	C	N
0.125	3.175 B4-4	0.73 18.542	0.089 2.261	7.50 1.313	0.360 9.144	2.700 12.010	0.350 8.89	0.018 0.46	18.50	MW	C	N
0.125	3.175 915	0.75 19.050	0.101 2.565	1.50 0.263	0.550 13.970	0.810 3.603	0.200 5.08	0.012 0.30	16.00	MW	C	Z
0.125	3.175 JJ-27	0.75 19.050	0.101 2.565	1.60 0.280	0.560 14.224	0.910 4.048	0.190 4.83	0.012 0.30	14.80	MW	C	N
0.125	3.175 A11-15	0.75 19.050	0.093 2.362	3.90 0.683	0.320 8.128	1.300 5.782	0.300 7.62	0.016 0.41	18.50	SST	CG	N
0.125	3.175 F-3	0.75 19.050	0.089 2.261	7.00 1.225	0.380 9.652	2.700 12.010	0.370 9.40	0.018 0.46	19.50	MW	C	Z
0.125	3.175 A13-50	0.75 19.050	0.087 2.210	8.90 1.558	0.360 9.144	3.200 14.234	0.380 9.65	0.019 0.48	19.80	MW	CG	GI
0.125	3.175 KK-31	0.75 19.050	0.085 2.159	12.00 2.100	0.310 7.874	3.700 16.458	0.400 10.16	0.020 0.51	19.00	MW	C	N
0.125	3.175 B14-18	0.75 19.050	0.081 2.057	20.00 3.500	0.240 6.096	4.800 21.350	0.440 11.18	0.022 0.56	20.00	MW	CG	N
0.125	3.175 S-702	0.75 19.050	0.081 2.057	15.00 2.625	0.210 5.334	3.200 14.234	0.460 11.68	0.022 0.56	20.00	SST	C	N
0.125	3.175 A10-24	0.75 19.050	0.079 2.007	20.00 3.500	0.180 4.572	3.600 16.013	0.460 11.68	0.023 0.58	19.00	SST	C	N
0.125	3.175 10957	0.78 19.812	0.101 2.565	1.30 0.228	0.550 13.970	0.680 3.025	0.230 5.84	0.012 0.30	18.50	MW	C	Z
0.125	3.175 TT-9	0.78 19.812	0.089 2.261	5.60 0.980	0.320 8.128	1.800 8.006	0.410 10.41	0.018 0.46	21.50	SST	C	N
0.125	3.175 AA-70	0.81 20.574	0.109 2.769	0.30 0.053	0.570 14.478	0.170 0.756	0.110 2.79	0.008 0.20	12.50	SST	C	N
0.125	3.175 1719	0.81 20.574	0.105 2.667	0.84 0.147	0.630 16.002	0.530 2.357	0.140 3.56	0.010 0.25	13.30	MW	C	Z
0.125	3.175 S-881	0.81 20.574	0.099 2.515	1.30 0.228	0.520 13.208	0.680 3.025	0.290 7.37	0.013 0.33	21.50	SST	C	N
0.125	3.175 B4-3	0.81 20.574	0.095 2.413	5.00 0.875	0.320 8.128	1.600 7.117	0.210 5.33	0.015 0.38	13.00	MW	C	N
0.125	3.175 S-792	0.84 21.336	0.101 2.565	1.00 0.175	0.570 14.478	0.580 2.580	0.250 6.35	0.012 0.30	20.00	SST	C	N
0.125	3.175 10943	0.84 21.336	0.091 2.311	8.30 1.453	0.280 7.112	2.300 10.230	0.250 6.35	0.017 0.43	13.50	MW	C	Z
0.125	3.175 KK-41	0.84 21.336	0.081 2.057	20.00 3.500	0.160 4.064	3.200 14.234	0.360 9.14	0.022 0.56	15.50	SST	C	N
0.125	3.175 00-69	0.88 22.352	0.105 2.667	0.30 0.053	0.530 13.462	0.160 0.712	0.350 8.89	0.010 0.25	33.80	MW	C	N
0.125	3.175 S-1511	0.88 22.352	0.095 2.413	4.00 0.700	0.270 6.858	1.100 4.893	0.230 5.84	0.015 0.38	14.00	SST	C	N
0.125	3.175 KK-82	0.91 23.114	0.085 2.159	10.00 1.750	0.350 8.890	3.700 16.458	0.440 11.18	0.020 0.51	21.00	MW	C	N
0.125	3.175 Y-85	0.91 23.114	0.085 2.159	9.70 1.698	0.380 9.652	3.700 16.458	0.470 11.94	0.020 0.51	22.50	MW	C	GI
0.125	3.175 LL-89	0.94 23.876	0.085 2.159	8.60 1.505	0.420 10.668	3.600 16.013	0.520 13.21	0.020 0.51	25.00	MW	C	N
0.125	3.175 MM-66	0.94 23.876	0.065 1.651									




O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg. Max. Defl. Inches	Sugg. Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Fns'h
mm		mm	mm	N/mm	mm	N	mm	mm				
0.125	3.175	10474	1.13	28.702	0.081	2.057	19.00	3.325	0.260	6.604	4.800	21.350
0.125	3.175	S-3152	1.19	30.226	0.101	2.565	0.97	0.170	0.590	14.986	0.580	2.580
0.125	3.175	B15-63	1.22	30.988	0.099	2.515	1.00	0.175	0.800	20.320	0.810	3.603
0.125	3.175	S-1085	1.25	31.750	0.095	2.413	2.40	0.420	0.430	10.922	1.100	4.893
0.125	3.175	PP-9	1.25	31.750	0.065	1.651	100.00	17.500	0.070	1.778	7.200	32.026
0.125	3.175	AA-7	1.38	35.052	0.105	2.667	0.47	0.082	0.720	18.288	0.340	1.512
0.125	3.175	354-B	1.38	35.052	0.097	2.464	1.60	0.280	0.900	22.860	1.400	6.227
0.125	3.175	1827	1.38	35.052	0.093	2.362	2.30	0.403	0.810	20.574	1.900	8.451
0.125	3.175	KK-90	1.38	35.052	0.089	2.261	4.90	0.858	0.550	13.970	2.700	12.010
0.125	3.175	MM-82	1.38	35.052	0.087	2.210	6.60	1.155	0.480	12.192	3.200	14.234
0.125	3.175	FF-54	1.38	35.052	0.085	2.159	7.90	1.383	0.460	11.684	3.700	16.458
0.125	3.175	NN-94	1.50	38.100	0.075	1.905	13.00	2.275	0.330	8.382	4.400	19.571
0.125	3.175	2982	1.53	38.862	0.095	2.413	3.10	0.543	0.510	12.954	1.600	7.117
0.125	3.175	354-C	1.75	44.450	0.097	2.464	1.20	0.210	1.100	27.940	1.400	6.227
0.125	3.175	BB-34	2.25	57.150	0.085	2.159	5.70	0.998	0.640	16.256	3.700	16.458
0.125	3.175	Y-65	3.00	76.200	0.105	2.667	0.21	0.037	2.500	63.500	0.520	2.313
0.125	3.175	S-1474	4.25	107.950	0.105	2.667	0.08	0.014	3.200	81.280	0.270	1.201
0.14	3.556	10224	0.16	4.064	0.122	3.099	1.20	0.210	0.100	2.540	0.120	0.534
0.14	3.556	DD-49	0.19	4.826	0.116	2.946	4.20	0.735	0.120	3.048	0.490	2.180
0.14	3.556	J-84	0.20	5.080	0.100	2.540	67.00	11.725	0.050	1.270	3.300	14.678
0.14	3.556	U-93	0.25	6.350	0.118	2.997	1.60	0.280	0.150	3.810	0.250	1.112
0.14	3.556	Z-7	0.25	6.350	0.112	2.845	3.80	0.665	0.120	3.048	0.460	2.046
0.14	3.556	II-9	0.25	6.350	0.096	2.438	102.00	17.850	0.040	1.016	4.400	19.571
0.14	3.556	JJ-72	0.25	6.350	0.080	2.032	155.00	27.125	0.040	1.016	6.600	29.357
0.14	3.556	00-19	0.28	7.112	0.120	3.048	1.00	0.175	0.190	4.826	0.190	0.845
0.14	3.556	L-97	0.28	7.112	0.116	2.946	2.00	0.350	0.160	4.064	0.330	1.468
0.14	3.556	GG-60	0.31	7.874	0.112	2.845	2.70	0.473	0.160	4.064	0.420	1.868
0.14	3.556	B8-8	0.31	7.874	0.104	2.642	14.00	2.450	0.150	3.810	2.100	9.341
0.14	3.556	AA-6	0.31	7.874	0.100	2.540	27.00	4.725	0.120	3.048	3.300	14.678
0.14	3.556	LL-69	0.31	7.874	0.090	2.286	49.00	8.575	0.080	2.032	4.000	17.792
0.14	3.556	A9-27	0.34	8.636	0.098	2.489	27.00	4.725	0.090	2.286	2.500	11.120
0.14	3.556	CC-91	0.34	8.636	0.088	2.235	57.00	9.975	0.080	2.032	4.400	19.571
0.14	3.556	NN-41	0.34	8.636	0.088	2.235	66.00	11.550	0.070	1.778	4.400	19.571
0.14	3.556	H-77	0.34	8.636	0.084	2.134	78.00	13.650	0.070	1.778	5.500	24.464
0.14	3.556	A-27	0.34	8.636	0.082	2.083	110.00	19.250	0.050	1.270	6.000	26.688
0.14	3.556	A12-1	0.35	8.890	0.112	2.845	4.00	0.700	0.200	5.080	0.820	3.647
0.14	3.556	O-80	0.36	9.144	0.100	2.540	41.00	7.175	0.050	1.270	2.200	9.786
0.14	3.556	12619	0.38	9.652	0.116	2.946	2.60	0.455	0.270	6.858	0.710	3.158
0.14	3.556	B2-23	0.38	9.652	0.116	2.946	2.20	0.385	0.260	6.604	0.570	2.535
0.14	3.556	J-26	0.38	9.652	0.116	2.946	2.80	0.490	0.280	7.112	0.790	3.514
0.14	3.556	A15-25	0.38	9.652	0.114	2.896	4.00	0.700	0.260	6.604	1.000	4.448
0.14	3.556	FF-22	0.38	9.652	0.114	2.896	4.00	0.700	0.200	5.080	0.800	3.558
0.14	3.556	M-129	0.38	9.652	0.110	2.794	5.70	0.998	0.230	5.842	1.300	5.782
0.14	3.556	A15-6	0.38	9.652	0.100	2.540	21.00	3.675	0.110	2.794	2.200	9.786
0.14	3.556	AA-42	0.38	9.652	0.100	2.540	13.00	2.275	0.160	4.064	2.000	8.896
0.14	3.556	GG-38	0.38	9.652	0.100	2.540	18.00	3.150	0.120	3.048	2.200	9.786
0.14	3.556	3762	0.38	9.652	0.084	2.134	157.00	27.475	0.050	1.270	8.200	36.474
0.14	3.556	H-95	0.38	9.652	0.084	2.134	126.00	22.050	0.060	1.524	8.200	36.474
0.14	3.556	S-1535	0.39	9.906	0.078	1.981	162.00	28.350	0.045	1.143	7.300	32.470
0.14	3.556	11375	0.41	10.414	0.108	2.743	7.00	1.225	0.160	4.064	1.100	4.893
0.14	3.556	3633	0.41	10.414	0.104	2.642	14.00	2.450	0.180	4.572	2.400	10.675
0.14	3.556	J-80	0.41	10.414	0.102	2.591	14.00	2.450	0.140	3.556	1.900	8.451
0.14	3.556	UU-4	0.42	10.668	0.100	2.540	17.00	2.975	0.130	3.302	2.200	9.786
0.14	3.556	B1-10	0.44	11.176	0.124	3.150	0.26	0.046	0.340	8.636	0.090	0.400
0.14	3.556	J-99	0.44	11.176	0.116	2.946	1.10	0.193	0.250	6.350	0.270	1.201
0.14	3.556	3793	0.44	11.176	0.108	2.743	7.90	1.383	0.220	5.588	1.700	7.562
0.14	3.556	V-40	0.44	11.176	0.106	2.692	6.50	1.138	0.220	5.588	1.400	6.227
0.14	3.556	B14-56	0.44	11.176	0.104	2.642	17.00	2.975	0.150	3.810	2.400	10.675
0.14	3.556	J-90	0.44	11.176	0.102	2.591	13.00	2.275	0.220	5.588	2.800	12.454
0.14	3.556	V-41	0.44	11.176	0.102	2.591	11.00	1.925	0.190	4.826	2.000	8.896
0.14	3.556	00-22	0.45	11.430	0.100	2.540	27.00	4.725	0.120	3.048	3.300	14.678
0.14	3.556	2674	0.47	11.938	0.104	2.642	12.00	2.100	0.200	5.080	2.400	10.675
0.14	3.556	CC-19	0.47	11.938	0.100	2.540	13.00	2.275	0.210	5.334	2.800	12.454
0.14	3.556	J-55	0.50	12.700	0.120	3.048	0.65	0.114	0.370	9.398	0.240	1.068
0.14	3.556	11255	0.50	12.700	0.116	2.946	1.10	0.193	0.320	8.128	0.340	1.512
0.14	3.556	N-35	0.50	12.700	0.090	2.286	41.00	7.175	0.140	3.556	5.900	26.243
0.14	3.556	S-236	0.50	12.700	0.088	2.235	64.00	11.200	0.070	1.778	4.400	19.571
0.14	3.556	B18-144	0.53	13.462	0.124	3.150	0.32	0.056	0.440	11.176	0.140	0.623
0.14	3.556	S-191	0.56	14.224	0.104	2.642	13.00	2.275	0.120	3.048	1.600	7.117
0.14	3.556	S-1331	0.56	14.224	0.100	2.540	17.00	2.975	0.130	3.302	2.200	9.786
0.14	3.556	10025	0.56	14.224	0.094	2.388	28.00	4.900	0.180	4.572	4.900	21.795
0.14	3.556	XX-38	0.58	14.732	0.100	2.540	17.00	2.975	0.200	5.080	3.300	14.678
0.14	3.556	B15-46	0.59	14.986	0.120	3.048	0.33	0.058	0.360	9.144	0.120	0.534
0.14	3.556	2935	0.59	14.986	0.096	2.438	19.00	3.325	0.230	5.842	4.400	19.571
0.14	3.556	10994	0.63	16.002	0.100	2.540	13.00	2.275	0.250	6.350	3.300	14.678
0.14	3.556	Q-95	0.63	16.002	0.080	2.032	65.00	11.375	0.150	3.810	9.900	44.035
0.14	3.556	EE-30	0.66	16.764	0.116	2.946	1.10	0.193	0.470	11.938	0.520	2.313
0.14	3.556	AA-12	0.66	16.764	0.110	2.794	2.20	0.385	0.430	10.922	0.930	4.137
0.14	3.556	MM-5	0.66	16.764	0.076	1.930	90.00	15.750	0.090	2.286	7.900	35.139
0.14	3.556	10212	0.69	17.526	0.106	2.692	9.90	1.733	0.210	5.334	2.100	




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.14	3.556	V-77	0.69	17.526	0.102	2.591	13.00	2.275	0.220	5.588	2.800	12.454	0.210	5.33	0.019	0.48	10.00	MW	C	N
0.14	3.556	JJ-74	0.70	17.780	0.100	2.540	17.00	2.975	0.200	5.080	3.300	14.678	0.220	5.59	0.020	0.51	10.00	MW	C	N
0.14	3.556	Q-83	0.72	18.288	0.092	2.337	21.00	3.675	0.270	6.858	5.600	24.909	0.420	10.67	0.024	0.61	16.50	MW	C	N
0.14	3.556	10968	0.75	19.050	0.120	3.048	0.50	0.088	0.590	14.986	0.300	1.334	0.160	4.06	0.010	0.25	15.00	MW	C	Z
0.14	3.556	JJ-25	0.78	19.812	0.088	2.235	21.00	3.675	0.210	5.334	4.400	19.571	0.520	13.21	0.026	0.66	20.00	SST	CG	N
0.14	3.556	11464	0.81	20.574	0.114	2.896	2.20	0.385	0.300	7.620	0.660	2.936	0.140	3.56	0.013	0.33	10.00	SST	C	N
0.14	3.556	RR-44	0.81	20.574	0.100	2.540	6.40	1.120	0.340	8.636	2.200	9.786	0.420	10.67	0.020	0.51	20.00	SST	C	N
0.14	3.556	FF-53	0.88	22.352	0.120	3.048	0.47	0.082	0.710	18.034	0.330	1.468	0.170	4.32	0.010	0.25	16.00	MW	C	N
0.14	3.556	3195	0.88	22.352	0.116	2.946	1.00	0.175	0.670	17.018	0.680	3.025	0.200	5.08	0.012	0.30	16.00	MW	C	Z
0.14	3.556	1831	0.91	23.114	0.116	2.946	1.10	0.193	0.710	18.034	0.780	3.469	0.190	4.83	0.012	0.30	15.00	MW	C	Z
0.14	3.556	3707	0.94	23.876	0.120	3.048	0.33	0.058	0.710	18.034	0.230	1.023	0.230	5.84	0.010	0.25	22.00	MW	C	Z
0.14	3.556	B5-69	0.94	23.876	0.118	2.997	0.34	0.060	0.590	14.986	0.200	0.890	0.350	8.89	0.011	0.28	31.00	MW	C	N
0.14	3.556	S-393	0.94	23.876	0.108	2.743	2.20	0.385	0.510	12.954	1.100	4.893	0.360	9.14	0.016	0.41	21.50	SST	C	N
0.14	3.556	A10-34	1.00	25.400	0.116	2.946	0.61	0.107	0.720	18.288	0.430	1.913	0.290	7.37	0.012	0.30	22.80	SST	C	N
0.14	3.556	3773	1.00	25.400	0.108	2.743	3.50	0.613	0.490	12.446	1.700	7.562	0.270	6.86	0.016	0.41	16.00	MW	C	Z
0.14	3.556	11254	1.00	25.400	0.102	2.591	4.70	0.823	0.400	10.160	1.900	8.451	0.440	11.18	0.019	0.48	22.00	SST	C	N
0.14	3.556	NN-55	1.03	26.162	0.108	2.743	3.30	0.578	0.520	13.208	1.700	7.562	0.290	7.37	0.016	0.41	17.00	MW	C	N
0.14	3.556	BB-83	1.06	26.924	0.096	2.438	7.10	1.243	0.410	10.414	2.900	12.899	0.620	15.75	0.022	0.56	27.00	SST	C	N
0.14	3.556	LL-19	1.13	28.702	0.120	3.048	0.26	0.046	0.850	21.590	0.220	0.979	0.280	7.11	0.010	0.25	27.00	MW	C	N
0.14	3.556	PP-54	1.13	28.702	0.108	2.743	1.80	0.315	0.630	16.002	1.100	4.893	0.500	12.70	0.016	0.41	30.00	MW	C	Z
0.14	3.556	LL-91	1.25	31.750	0.124	3.150	0.14	0.025	1.100	27.940	0.150	0.667	0.170	4.32	0.008	0.20	20.00	MW	C	N
0.14	3.556	4223	1.25	31.750	0.110	2.794	1.30	0.228	0.760	19.304	0.960	4.270	0.490	12.45	0.015	0.38	31.50	MW	C	Z
0.14	3.556	S-1020	1.31	33.274	0.100	2.540	4.00	0.700	0.550	13.970	2.200	9.786	0.640	16.26	0.020	0.51	31.00	SST	C	N
0.14	3.556	B3-41	1.31	33.274	0.080	2.032	30.00	5.250	0.330	8.382	9.900	44.035	0.930	23.62	0.030	0.76	31.00	MW	CG	N
0.14	3.556	AA-68	1.34	34.036	0.104	2.642	4.90	0.858	0.330	8.382	1.600	7.117	0.320	8.13	0.018	0.46	17.00	SST	C	N
0.14	3.556	1755	1.38	35.052	0.108	2.743	1.60	0.280	0.840	21.336	1.400	6.227	0.540	13.72	0.016	0.41	32.50	MW	C	Z
0.14	3.556	2638	1.38	35.052	0.102	2.591	3.60	0.630	0.750	19.050	2.700	12.010	0.620	15.75	0.019	0.48	31.80	MW	C	Z
0.14	3.556	A12-34	1.44	36.576	0.116	2.946	0.43	0.075	1.100	27.940	0.450	2.002	0.380	9.65	0.012	0.30	31.00	SST	C	N
0.14	3.556	N-108	1.44	36.576	0.092	2.337	10.00	1.750	0.550	13.970	5.600	24.909	0.790	20.07	0.024	0.61	32.00	MW	CG	GI
0.14	3.556	1922	1.50	38.100	0.108	2.743	1.70	0.298	0.980	24.892	1.700	7.562	0.520	13.21	0.016	0.41	31.30	MW	C	Z
0.14	3.556	0-128	1.94	49.276	0.090	2.286	7.10	1.243	0.560	14.224	4.000	17.792	1.200	30.48	0.025	0.64	47.00	SST	C	N
0.148	3.759	70206	0.25	6.350	0.106	2.692	34.00	5.950	0.110	2.794	3.600	16.013	0.130	3.30	0.021	0.53	6.00	MW	CG	N
0.148	3.759	70206S	0.25	6.350	0.106	2.692	30.00	5.250	0.080	2.032	2.400	10.675	0.130	3.30	0.021	0.53	6.00	SST	CG	N
0.148	3.759	70225	0.25	6.350	0.102	2.591	50.00	8.750	0.090	2.286	4.700	20.906	0.140	3.56	0.023	0.58	6.13	MW	CG	N
0.148	3.759	70225S	0.25	6.350	0.102	2.591	43.00	7.525	0.070	1.778	3.100	13.789	0.140	3.56	0.023	0.58	6.13	SST	CG	N
0.148	3.759	70207	0.31	7.874	0.106	2.692	27.00	4.725	0.140	3.556	3.600	16.013	0.150	3.81	0.021	0.53	7.13	MW	CG	N
0.148	3.759	70207S	0.31	7.874	0.106	2.692	23.00	4.025	0.100	2.540	2.400	10.675	0.150	3.81	0.021	0.53	7.13	SST	CG	N
0.148	3.759	70226	0.31	7.874	0.102	2.591	38.00	6.650	0.120	3.048	4.700	20.906	0.170	4.32	0.023	0.58	7.38	MW	CG	N
0.148	3.759	70226S	0.31	7.874	0.102	2.591	33.00	5.775	0.090	2.286	3.100	13.789	0.170	4.32	0.023	0.58	7.38	SST	CG	N
0.148	3.759	70208	0.38	9.652	0.106	2.692	21.00	3.675	0.170	4.318	3.600	16.013	0.180	4.57	0.021	0.53	8.50	MW	CG	N
0.148	3.759	70208S	0.38	9.652	0.106	2.692	18.00	3.150	0.130	3.302	2.400	10.675	0.180	4.57	0.021	0.53	8.50	SST	CG	N
0.148	3.759	70227	0.38	9.652	0.102	2.591	31.00	5.425	0.150	3.810	4.700	20.906	0.200	5.08	0.023	0.58	8.75	MW	CG	N
0.148	3.759	70227S	0.38	9.652	0.102	2.591	27.00	4.725	0.120	3.048	3.100	13.789	0.200	5.08	0.023	0.58	8.75	SST	CG	N
0.148	3.759	70209	0.44	11.176	0.106	2.692	18.00	3.150	0.200	5.080	3.600	16.013	0.200	5.08	0.021	0.53	9.63	MW	CG	N
0.148	3.759	70209S	0.44	11.176	0.106	2.692	16.00	2.800	0.150	3.810	2.400	10.675	0.200	5.08	0.021	0.53	9.63	SST	CG	N
0.148	3.759	70228	0.44	11.176	0.102	2.591	26.00	4.550	0.180	4.572	4.700	20.906	0.230	5.84	0.023	0.58	9.88	MW	CG	N
0.148	3.759	70228S	0.44	11.176	0.102	2.591	23.00	4.025	0.140	3.556	3.100	13.789	0.230	5.84	0.023	0.58	9.88	SST	CG	N
0.148	3.759	70210	0.50	12.700	0.106	2.692	15.00	2.625	0.240	6.096	3.600	16.013	0.230	5.84	0.021	0.53	10.90	MW	CG	N
0.148	3.759	70210S	0.50	12.700	0.106	2.692	13.00	2.275	0.180	4.572	2.400	10.675	0.230	5.84	0.021	0.53	10.90	SST	CG	N
0.148	3.759	70229	0.50	12.700	0.102	2.591	23.00	4.025	0.210	5.334	4.700	20.906	0.260	6.60	0.023	0.58	11.10	MW	CG	N
0.148	3.759	70211	0.56	14.224	0.106	2.692	14.00	2.450	0.270	6.858	3.600	16.013	0.250	6.35	0.021	0.53	12.00	MW	CG	N
0.148	3.759	70211S	0.56	14.224	0.106	2.692	12.00	2.100	0.200	5.080	2.400	10.675	0.250	6.35	0.021	0.53	12.00	SST	CG	N
0.148	3.759	70230	0.56	14.224	0.102	2.591	20.00	3.500	0.240	6.096	4.700	20.906	0.290	7.37	0.023	0.58	12.40	MW	CG	N
0.148	3.759	70230S	0.56	14.224	0.102	2.591	17.00	2.975	0.180	4.572	3.100	13.789	0.290	7.37	0.023					




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
0.148	3.759	70218S	1.00	25.400	0.106	2.692	6.40	1.120	0.370	9.398	2.400	10.675	0.430	10.92	0.021	0.53	20.50	SST	CG	N
0.148	3.759	70237	1.00	25.400	0.102	2.591	11.00	1.925	0.440	11.176	4.700	20.906	0.490	12.45	0.023	0.58	21.30	MW	CG	N
0.148	3.759	70237S	1.00	25.400	0.102	2.591	9.30	1.628	0.340	8.636	3.100	13.789	0.490	12.45	0.023	0.58	21.30	SST	CG	N
0.148	3.759	70220	1.13	28.702	0.106	2.692	6.80	1.190	0.530	13.462	3.600	16.013	0.470	11.94	0.021	0.53	22.10	MW	CG	N
0.148	3.759	70220S	1.13	28.702	0.106	2.692	5.90	1.033	0.410	10.414	2.400	10.675	0.470	11.94	0.021	0.53	22.10	SST	CG	N
0.148	3.759	70239	1.13	28.702	0.102	2.591	9.80	1.715	0.480	12.192	4.700	20.906	0.530	13.46	0.023	0.58	23.00	MW	CG	N
0.148	3.759	70239S	1.13	28.702	0.102	2.591	8.50	1.488	0.370	9.398	3.100	13.789	0.530	13.46	0.023	0.58	23.00	SST	CG	N
0.148	3.759	70221	1.25	31.750	0.106	2.692	5.90	1.033	0.610	15.494	3.600	16.013	0.530	13.46	0.021	0.53	25.00	MW	CG	N
0.148	3.759	70221S	1.25	31.750	0.106	2.692	5.20	0.910	0.470	11.938	2.400	10.675	0.530	13.46	0.021	0.53	25.00	SST	CG	N
0.148	3.759	70240	1.25	31.750	0.102	2.591	8.50	1.488	0.550	13.970	4.700	20.906	0.600	15.24	0.023	0.58	26.10	MW	CG	N
0.148	3.759	70240S	1.25	31.750	0.102	2.591	7.40	1.295	0.420	10.668	3.100	13.789	0.600	15.24	0.023	0.58	26.10	SST	CG	N
0.148	3.759	70223	1.38	35.052	0.106	2.692	5.60	0.980	0.650	16.510	3.600	16.013	0.550	13.97	0.021	0.53	26.40	MW	CG	N
0.148	3.759	70223S	1.38	35.052	0.106	2.692	4.90	0.858	0.490	12.446	2.400	10.675	0.550	13.97	0.021	0.53	26.40	SST	CG	N
0.148	3.759	70242	1.38	35.052	0.102	2.591	8.00	1.400	0.590	14.986	4.700	20.906	0.640	16.26	0.023	0.58	27.80	MW	CG	N
0.148	3.759	70242S	1.38	35.052	0.102	2.591	7.00	1.225	0.450	11.430	3.100	13.789	0.640	16.26	0.023	0.58	27.80	SST	CG	N
0.148	3.759	70224	1.50	38.100	0.106	2.692	4.90	0.858	0.730	18.542	3.600	16.013	0.620	15.75	0.021	0.53	29.60	MW	CG	N
0.148	3.759	70224S	1.50	38.100	0.106	2.692	4.30	0.753	0.560	14.224	2.400	10.675	0.620	15.75	0.021	0.53	29.60	SST	CG	N
0.148	3.759	70243	1.50	38.100	0.102	2.591	7.10	1.243	0.660	16.764	4.700	20.906	0.710	18.03	0.023	0.58	31.00	MW	CG	N
0.148	3.759	70243S	1.50	38.100	0.102	2.591	6.20	1.085	0.510	12.954	3.100	13.789	0.710	18.03	0.023	0.58	31.00	SST	CG	N
0.156	3.962	HH-70	0.19	4.826	0.116	2.946	46.00	8.050	0.070	1.778	3.000	13.344	0.100	2.54	0.020	0.51	4.00	MW	C	N
0.156	3.962	HH-57	0.25	6.350	0.132	3.353	2.50	0.438	0.170	4.318	0.430	1.913	0.080	2.03	0.012	0.30	5.50	SST	C	N
0.156	3.962	V-18	0.25	6.350	0.126	3.200	7.50	1.313	0.110	2.794	0.850	3.781	0.090	2.29	0.015	0.38	5.00	SST	C	N
0.156	3.962	904	0.25	6.350	0.116	2.946	30.00	5.250	0.100	2.540	3.000	13.344	0.120	3.05	0.020	0.51	5.00	MW	C	Z
0.156	3.962	J-86	0.25	6.350	0.106	2.692	83.00	14.525	0.060	1.524	5.400	24.019	0.130	3.30	0.025	0.64	5.00	MW	CG	Z
0.156	3.962	KK-7	0.28	7.112	0.136	3.454	1.30	0.228	0.200	5.080	0.270	1.201	0.060	1.52	0.010	0.25	5.00	SST	C	N
0.156	3.962	H-18	0.28	7.112	0.106	2.692	62.00	10.850	0.090	2.286	5.400	24.019	0.150	3.81	0.025	0.64	6.00	MW	CG	Z
0.156	3.962	B-46	0.28	7.112	0.104	2.642	88.00	15.400	0.050	1.270	4.000	17.792	0.160	4.06	0.026	0.66	5.00	SST	C	N
0.156	3.962	3721	0.31	7.874	0.142	3.607	0.09	0.016	0.210	5.334	0.020	0.089	0.110	2.79	0.007	0.18	14.30	MW	C	N
0.156	3.962	FF-37	0.31	7.874	0.126	3.200	3.70	0.648	0.160	4.064	0.600	2.669	0.150	3.81	0.015	0.38	9.00	MW	C	Z
0.156	3.962	U-16	0.31	7.874	0.126	3.200	5.20	0.910	0.190	4.826	1.000	4.448	0.120	3.05	0.015	0.38	7.00	MW	C	Z
0.156	3.962	EE-95	0.31	7.874	0.124	3.150	8.60	1.505	0.180	4.572	1.600	7.117	0.110	2.79	0.016	0.41	6.00	MW	C	N
0.156	3.962	S-1038	0.31	7.874	0.120	3.048	17.00	2.975	0.090	2.286	1.500	6.672	0.110	2.79	0.018	0.46	5.00	SST	C	N
0.156	3.962	B8-6	0.31	7.874	0.118	2.997	12.00	2.100	0.160	4.064	1.900	8.451	0.150	3.81	0.019	0.48	8.00	MW	CG	N
0.156	3.962	J-82	0.31	7.874	0.114	2.896	17.00	2.975	0.120	3.048	2.100	9.341	0.190	4.83	0.021	0.53	8.00	SST	C	N
0.156	3.962	Q-11	0.31	7.874	0.106	2.692	62.00	10.850	0.090	2.286	5.400	24.019	0.180	4.57	0.025	0.64	6.00	MW	C	Z
0.156	3.962	U-90	0.31	7.874	0.090	2.286	153.00	26.775	0.050	1.270	7.300	32.470	0.260	6.60	0.033	0.84	8.00	MW	CG	Z
0.156	3.962	N-5	0.34	8.636	0.140	3.556	0.15	0.026	0.240	6.096	0.040	0.178	0.110	2.79	0.008	0.20	12.50	SST	C	N
0.156	3.962	S-301	0.34	8.636	0.140	3.556	0.14	0.025	0.230	5.842	0.030	0.133	0.110	2.79	0.008	0.20	13.00	SST	C	N
0.156	3.962	LL-38	0.34	8.636	0.118	2.997	13.00	2.275	0.140	3.556	1.700	7.562	0.150	3.81	0.019	0.48	7.00	SST	C	N
0.156	3.962	Y-67	0.34	8.636	0.118	2.997	12.00	2.100	0.170	4.318	2.100	9.341	0.170	4.32	0.019	0.48	8.00	MW	C	N
0.156	3.962	B4-6	0.34	8.636	0.114	2.896	21.00	3.675	0.170	4.318	3.400	15.123	0.180	4.57	0.021	0.53	7.50	MW	C	N
0.156	3.962	2815	0.34	8.636	0.086	2.184	244.00	42.700	0.050	1.270	13.000	57.824	0.250	6.35	0.035	0.89	7.00	MW	CG	Z
0.156	3.962	S-1095	0.38	9.652	0.126	3.200	2.10	0.368	0.170	4.318	0.340	1.512	0.210	5.33	0.015	0.38	13.00	SST	C	N
0.156	3.962	10111	0.38	9.652	0.124	3.150	7.60	1.330	0.200	5.080	1.600	7.117	0.120	3.05	0.016	0.41	6.50	MW	C	Z
0.156	3.962	N-28	0.38	9.652	0.120	3.048	7.20	1.260	0.200	5.080	1.400	6.227	0.180	4.57	0.018	0.46	10.00	MW	CG	Z
0.156	3.962	BB-73	0.38	9.652	0.116	2.946	7.10	1.243	0.110	2.794	0.740	3.292	0.270	6.66	0.020	0.51	13.50	SST	CG	N
0.156	3.962	O-37	0.38	9.652	0.116	2.946	18.00	3.150	0.160	4.064	3.000	13.344	0.160	4.06	0.020	0.51	7.00	MW	C	N
0.156	3.962	O-104	0.38	9.652	0.114	2.896	23.00	4.025	0.150	3.810	3.400	15.123	0.170	4.32	0.021	0.53	7.00	MW	C	N
0.156	3.962	B12-34	0.38	9.652	0.112	2.845	22.00	3.850	0.180	4.572	3.900	17.347	0.190	4.83	0.022	0.56	8.50	MW	CG	GI
0.156	3.962	B3-37	0.38	9.652	0.110	2.794	31.00	5.425	0.140	3.556	4.500	20.016	0.170	4.32	0.023	0.58	7.50	MW	CG	N
0.156	3.962	H-97	0.38	9.652	0.106	2.692	45.00	7.875	0.120	3.048	5.400	24.019	0.190	4.83	0.025	0.64	7.50	MW	CG	GI
0.156	3.962	MM-25	0.38	9.652	0.102	2.591	59.00	10.325	0.110	2.794	6.700	29.802	0.220	5.59	0.027	0.69	8.00	MW	CG	N
0.156	3.962	G-31	0.38	9.652	0.100	2.540	94.00	16.450	0.080	2.032	7.500	33.360	0.210	5.33	0.028	0.71	6.50	MW	C	Z
0.156	3.962	W-76	0.38	9.652	0.096	2.438	84.00	14.700	0.070	1.778	6.100	27.133	0.270	6.86	0.030	0.				




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h								
0.156	3.962	906	0.56	14.224	0.110	2.794	19.00	3.325	0.240	6.096	4.500	20.016	0.280	7.11	0.023	0.58	11.00	MW	C	Z
0.156	3.962	3923	0.56	14.224	0.106	2.692	26.00	4.550	0.140	3.556	3.600	16.013	0.260	6.60	0.025	0.64	10.50	SST	CG	N
0.156	3.962	3982	0.56	14.224	0.106	2.692	25.00	4.375	0.220	5.588	5.400	24.019	0.330	8.38	0.025	0.64	12.00	MW	C	Z
0.156	3.962	10074	0.56	14.224	0.104	2.642	36.00	6.300	0.170	4.318	6.000	26.688	0.270	6.86	0.026	0.66	10.30	MW	CG	Z
0.156	3.962	A15-42	0.56	14.224	0.102	2.591	47.00	8.225	0.140	3.556	6.700	29.802	0.260	6.60	0.027	0.69	9.50	MW	CG	GI
0.156	3.962	L-75	0.56	14.224	0.082	2.083	178.00	31.150	0.060	1.524	11.000	48.928	0.440	11.18	0.037	0.94	11.00	SPR	C	N
0.156	3.962	11112	0.59	14.986	0.128	3.251	2.50	0.438	0.290	7.366	0.740	3.292	0.140	3.56	0.014	0.36	8.75	SST	C	N
0.156	3.962	EE-51	0.59	14.986	0.116	2.946	11.00	1.925	0.260	6.604	3.000	13.344	0.220	5.59	0.020	0.51	10.00	MW	C	Z
0.156	3.962	NN-66	0.59	14.986	0.110	2.794	14.00	2.450	0.210	5.334	3.000	13.344	0.310	7.87	0.023	0.58	12.50	SST	C	N
0.156	3.962	392	0.63	16.002	0.134	3.404	1.20	0.210	0.470	11.938	0.570	2.535	0.100	2.54	0.011	0.28	7.75	MW	C	Z
0.156	3.962	11404	0.63	16.002	0.130	3.302	2.30	0.403	0.400	10.160	0.930	4.137	0.120	3.05	0.013	0.33	8.00	MW	C	Z
0.156	3.962	GG-52	0.63	16.002	0.126	3.200	1.70	0.298	0.360	9.144	0.610	2.713	0.270	6.86	0.015	0.38	17.00	MW	C	N
0.156	3.962	10016	0.63	16.002	0.116	2.946	15.00	2.625	0.200	5.080	3.000	13.344	0.180	4.57	0.020	0.51	8.00	MW	C	Z
0.156	3.962	GG-45	0.63	16.002	0.116	2.946	18.00	3.150	0.160	4.064	3.000	13.344	0.160	4.06	0.020	0.51	7.00	MW	C	N
0.156	3.962	S-704	0.63	16.002	0.112	2.845	11.00	1.925	0.230	5.842	2.600	11.565	0.300	7.62	0.022	0.56	12.80	SST	C	N
0.156	3.962	S-859	0.63	16.002	0.112	2.845	9.70	1.698	0.270	6.858	2.600	11.565	0.340	8.64	0.022	0.56	14.50	SST	C	N
0.156	3.962	S-1101	0.63	16.002	0.108	2.743	16.00	2.800	0.220	5.588	3.400	15.123	0.320	8.13	0.024	0.61	13.50	SST	CG	N
0.156	3.962	M-121	0.66	16.764	0.118	2.997	5.20	0.910	0.330	8.382	1.700	7.562	0.320	8.13	0.019	0.48	16.00	MW	C	BO
0.156	3.962	B2-32	0.67	17.018	0.136	3.454	0.39	0.068	0.520	13.208	0.200	0.890	0.150	3.81	0.010	0.25	14.00	MW	C	N
0.156	3.962	U-17	0.69	17.526	0.126	3.200	1.90	0.333	0.450	11.430	0.850	3.781	0.230	5.84	0.015	0.38	14.00	SST	C	N
0.156	3.962	WW-23	0.69	17.526	0.124	3.150	1.90	0.333	0.390	9.906	0.750	3.336	0.300	7.62	0.016	0.41	17.50	SST	C	N
0.156	3.962	LL-82	0.69	17.526	0.118	2.997	7.90	1.383	0.220	5.588	1.700	7.562	0.210	5.33	0.019	0.48	10.00	SST	C	N
0.156	3.962	CC-90	0.69	17.526	0.116	2.946	6.10	1.068	0.330	8.382	2.000	8.896	0.300	7.62	0.020	0.51	15.00	SST	CG	N
0.156	3.962	S-1179	0.69	17.526	0.116	2.946	11.00	1.925	0.190	4.826	2.000	8.896	0.210	5.33	0.020	0.51	9.50	SST	C	N
0.156	3.962	H-57	0.69	17.526	0.112	2.845	11.00	1.925	0.360	9.144	3.800	16.902	0.330	8.88	0.022	0.56	15.00	MW	CG	N
0.156	3.962	LL-11	0.69	17.526	0.096	2.438	40.00	7.000	0.150	3.810	6.100	27.133	0.480	12.19	0.030	0.76	15.00	SST	C	N
0.156	3.962	W-34	0.72	18.288	0.118	2.997	3.80	0.665	0.370	9.398	1.400	6.227	0.350	8.89	0.019	0.48	18.50	SST	CG	N
0.156	3.962	1837	0.75	19.050	0.140	3.556	0.17	0.030	0.650	16.510	0.110	0.489	0.100	2.54	0.008	0.20	13.00	MW	C	Z
0.156	3.962	2505	0.75	19.050	0.136	3.454	0.36	0.063	0.590	14.986	0.210	0.934	0.160	4.06	0.010	0.25	15.00	MW	C	Z
0.156	3.962	PP-30	0.75	19.050	0.136	3.454	0.31	0.054	0.570	14.478	0.180	0.801	0.180	4.57	0.010	0.25	17.00	MW	C	N
0.156	3.962	JJ-84	0.75	19.050	0.124	3.150	2.50	0.438	0.480	12.192	1.200	5.338	0.270	6.86	0.016	0.41	16.00	MW	C	GI
0.156	3.962	II-50	0.75	19.050	0.120	3.048	3.60	0.630	0.430	10.922	1.500	6.672	0.320	8.13	0.018	0.46	18.00	MW	CG	Z
0.156	3.962	S-705	0.75	19.050	0.112	2.845	9.20	1.610	0.290	7.366	2.600	11.565	0.360	9.14	0.022	0.56	15.30	SST	C	N
0.156	3.962	KK-37	0.75	19.050	0.110	2.794	17.00	2.975	0.260	6.604	4.500	20.016	0.300	7.62	0.023	0.58	12.00	MW	C	GI
0.156	3.962	V-25	0.81	20.574	0.116	2.946	4.80	0.840	0.390	9.906	1.900	8.451	0.420	10.67	0.020	0.51	21.00	MW	CG	Z
0.156	3.962	10313	0.81	20.574	0.100	2.540	26.00	4.550	0.280	7.112	7.500	33.360	0.500	12.70	0.028	0.71	18.00	MW	CG	GI
0.156	3.962	B15-67	0.84	21.336	0.132	3.353	0.59	0.103	0.600	15.240	0.350	1.557	0.240	6.10	0.012	0.30	19.00	MW	C	N
0.156	3.962	CC-25	0.88	22.352	0.132	3.353	0.74	0.130	0.680	17.272	0.500	2.224	0.200	5.08	0.012	0.30	15.50	MW	C	Z
0.156	3.962	II-45	0.88	22.352	0.132	3.353	0.21	0.037	0.340	8.636	0.070	0.311	0.540	13.72	0.012	0.30	44.00	SST	C	N
0.156	3.962	2658	0.88	22.352	0.130	3.302	0.83	0.145	0.620	15.748	0.510	2.268	0.260	6.60	0.013	0.33	19.00	MW	C	GI
0.156	3.962	00-83	0.88	22.352	0.126	3.200	1.60	0.280	0.590	14.986	0.960	4.270	0.290	7.37	0.015	0.38	18.00	MW	C	N
0.156	3.962	3777	0.88	22.352	0.124	3.150	2.20	0.385	0.580	14.732	1.300	5.782	0.300	7.62	0.016	0.41	17.50	MW	C	Z
0.156	3.962	V-31	0.88	22.352	0.118	2.997	3.40	0.595	0.470	11.938	1.600	7.117	0.410	10.41	0.019	0.48	20.50	SST	C	N
0.156	3.962	1619	0.88	22.352	0.112	2.845	12.00	2.100	0.340	8.636	3.900	17.347	0.330	8.38	0.022	0.56	14.00	MW	C	Z
0.156	3.962	S-706	0.88	22.352	0.112	2.845	7.70	1.348	0.340	8.636	2.600	11.565	0.410	10.41	0.022	0.56	17.80	SST	C	N
0.156	3.962	00-17	0.88	22.352	0.096	2.438	45.00	7.875	0.200	5.080	9.100	40.477	0.480	12.19	0.030	0.76	15.00	MW	C	N
0.156	3.962	Y-48	0.91	23.114	0.106	2.692	21.00	3.675	0.260	6.604	5.400	24.019	0.380	9.65	0.025	0.64	14.00	MW	C	N
0.156	3.962	B15-20	0.94	23.876	0.102	2.591	27.00	4.725	0.250	6.350	6.700	29.802	0.410	10.41	0.027	0.69	15.00	MW	CG	Z
0.156	3.962	S-1165	0.94	23.876	0.096	2.438	25.00	4.375	0.240	6.096	6.100	27.133	0.660	16.76	0.030	0.76	22.00	SST	CG	N
0.156	3.962	393	1.00	25.400	0.134	3.404	0.73	0.128	0.780	19.812	0.570	2.535	0.140	3.56	0.011	0.28	11.50	MW	C	Z
0.156	3.962	356-A	1.00	25.400	0.130	3.302	1.20	0.210	0.740	18.796	0.930	4.137	0.190	4.83	0.013	0.33	13.30	MW	C	Z
0.156	3.962	355-A	1.00	25.400	0.128	3.251	1.60	0.280	0.720	18.288	1.200	5.338	0.210	5.33	0.014	0.36	14.00	MW	C	Z
0.156	3.962	PP-7	1.00	25.400	0.128	3.251	1.20	0.210	0.730	18.542	0.880	3.914	0.270	6.86	0.014	0.36	18.00	MW	C	N
0.156	3.962	S-1025	1.00	25.400	0.128	3.251	0.99	0.173	0.720	18.288	0.710	3.158	0.280	7.11	0.014					




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends E F N sh									
0.156	3.962	158-C	1.75	44.450	0.100	2.540	13.00	2.275	0.590	14.986	7.500	33.360	1.020	25.91	0.028	0.71	35.30	MW	C	Z
0.156	3.962	1575	2.88	73.152	0.126	3.200	0.25	0.044	1.300	33.020	0.320	1.423	1.590	40.39	0.015	0.38	105.00	MW	C	Z
0.156	3.962	10851	3.31	84.074	0.110	2.794	3.70	0.648	0.820	20.828	3.000	13.344	1.020	25.91	0.023	0.58	43.50	SST	C	N
0.156	3.962	A10-63	3.75	95.250	0.110	2.794	3.30	0.578	0.920	23.368	3.000	13.344	1.140	28.96	0.023	0.58	48.50	SST	C	N
0.158	4.013	10242	0.75	19.050	0.116	2.946	14.00	2.450	0.250	6.350	3.400	15.123	0.230	5.84	0.021	0.53	10.00	MW	C	Z
0.168	4.267	12749	0.47	11.938	0.120	3.048	21.00	3.675	0.220	5.588	4.600	20.461	0.250	6.35	0.024	0.61	9.50	MW	C	N
0.172	4.369	S-1093	0.19	4.826	0.152	3.861	1.20	0.210	0.130	3.302	0.160	0.712	0.060	1.52	0.010	0.25	4.50	SST	C	N
0.172	4.369	L-80	0.19	4.826	0.140	3.556	8.30	1.453	0.090	2.286	0.760	3.380	0.100	2.54	0.016	0.41	5.00	MW	C	N
0.172	4.369	M-31	0.19	4.826	0.114	2.896	103.00	18.025	0.040	1.016	4.400	19.571	0.150	3.81	0.029	0.74	5.00	SST	CG	N
0.172	4.369	BB-45	0.22	5.588	0.136	3.454	13.00	2.275	0.100	2.540	1.300	5.782	0.090	2.29	0.018	0.46	4.75	SST	CG	N
0.172	4.369	KK-23	0.25	6.350	0.144	3.658	5.60	0.980	0.170	4.318	0.970	4.315	0.080	2.03	0.014	0.36	4.50	MW	C	N
0.172	4.369	B5-8	0.25	6.350	0.140	3.556	9.90	1.733	0.140	3.556	1.400	6.227	0.070	1.78	0.016	0.41	4.50	MW	CG	N
0.172	4.369	CC-37	0.25	6.350	0.132	3.353	16.00	2.800	0.110	2.794	1.800	8.006	0.130	3.30	0.020	0.51	5.50	SST	C	N
0.172	4.369	B-17	0.25	6.350	0.116	2.946	64.00	11.200	0.050	1.270	3.500	15.568	0.200	5.08	0.028	0.71	6.00	SST	C	N
0.172	4.369	J-43	0.25	6.350	0.116	2.946	118.00	20.650	0.060	1.524	6.900	30.691	0.150	3.81	0.028	0.71	4.50	MW	C	N
0.172	4.369	AA-77	0.25	6.350	0.112	2.845	136.00	23.800	0.060	1.524	8.400	37.363	0.180	4.57	0.030	0.76	5.00	MW	C	Z
0.172	4.369	NN-82	0.28	7.112	0.156	3.962	0.24	0.042	0.210	5.334	0.050	0.222	0.070	1.78	0.008	0.20	7.50	MW	C	N
0.172	4.369	Y-92	0.28	7.112	0.136	3.454	12.00	2.100	0.160	4.064	1.900	8.451	0.120	3.05	0.018	0.46	5.50	MW	C	N
0.172	4.369	W-1	0.28	7.112	0.108	2.743	136.00	23.800	0.050	1.270	6.700	29.802	0.180	4.57	0.032	0.81	5.50	SST	CG	N
0.172	4.369	A9-24	0.31	7.874	0.148	3.759	3.60	0.630	0.180	4.572	0.670	2.980	0.060	1.52	0.012	0.30	4.00	MW	C	N
0.172	4.369	OO-38	0.31	7.874	0.148	3.759	1.50	0.263	0.230	5.842	0.330	1.468	0.080	2.03	0.012	0.30	7.00	MW	CG	N
0.172	4.369	A14-10	0.31	7.874	0.140	3.556	8.30	1.453	0.170	4.318	1.400	6.227	0.080	2.03	0.016	0.41	5.00	MW	CG	N
0.172	4.369	S-1202	0.31	7.874	0.128	3.251	17.00	2.975	0.140	3.556	2.400	10.675	0.180	4.57	0.022	0.56	7.00	SST	C	N
0.172	4.369	A11-22	0.31	7.874	0.126	3.200	32.00	5.600	0.130	3.302	4.100	18.237	0.130	3.30	0.023	0.58	5.75	MW	CG	GI
0.172	4.369	12654	0.34	8.636	0.142	3.607	4.70	0.823	0.240	6.096	1.100	4.893	0.110	2.79	0.015	0.38	6.00	MW	C	N
0.172	4.369	A15-19	0.34	8.636	0.140	3.556	6.20	1.085	0.230	5.842	1.400	6.227	0.110	2.79	0.016	0.41	6.00	MW	C	N
0.172	4.369	B18-127	0.34	8.636	0.136	3.454	6.90	1.208	0.220	5.588	1.500	6.672	0.130	3.30	0.018	0.46	6.00	MW	O	N
0.172	4.369	10768	0.34	8.636	0.122	3.099	51.00	8.925	0.100	2.540	4.900	21.795	0.160	4.06	0.025	0.64	5.50	MW	C	N
0.172	4.369	N-301	0.34	8.636	0.120	3.048	62.00	10.850	0.060	1.524	3.700	16.458	0.160	4.06	0.026	0.66	5.00	SST	C	N
0.172	4.369	GG-37	0.34	8.636	0.102	2.591	122.00	21.350	0.060	1.524	7.700	34.250	0.280	7.11	0.035	0.89	8.00	SST	CG	N
0.172	4.369	OO-30	0.38	9.652	0.148	3.759	1.10	0.193	0.270	6.858	0.280	1.245	0.110	2.79	0.012	0.30	8.00	SST	C	N
0.172	4.369	JJ-41	0.38	9.652	0.138	3.505	6.40	1.120	0.240	6.096	1.500	6.672	0.140	3.56	0.017	0.43	7.00	MW	C	Z
0.172	4.369	JJ-50	0.38	9.652	0.132	3.353	15.00	2.625	0.130	3.302	1.800	8.006	0.140	3.56	0.020	0.51	6.00	SST	C	N
0.172	4.369	O-71	0.38	9.652	0.132	3.353	13.00	2.275	0.210	5.334	2.700	12.010	0.160	4.06	0.020	0.51	7.00	MW	C	Z
0.172	4.369	AA-3	0.38	9.652	0.122	3.099	44.00	7.700	0.110	2.794	4.900	21.795	0.180	4.57	0.025	0.64	6.00	MW	C	Z
0.172	4.369	DD-2	0.38	9.652	0.108	2.743	96.00	16.800	0.070	1.778	6.700	29.802	0.220	5.59	0.032	0.81	7.00	SST	CG	N
0.172	4.369	J-95	0.41	10.414	0.142	3.607	2.40	0.420	0.240	6.096	0.570	2.535	0.170	4.32	0.015	0.38	10.00	MW	C	Z
0.172	4.369	NN-18	0.41	10.414	0.142	3.607	2.50	0.438	0.260	6.604	0.660	2.936	0.140	3.56	0.015	0.38	9.50	MW	CG	N
0.172	4.369	NN-63	0.41	10.414	0.126	3.200	20.00	3.500	0.200	5.080	4.000	17.792	0.210	5.33	0.023	0.58	8.00	MW	C	N
0.172	4.369	B5-21	0.41	10.414	0.120	3.048	42.00	7.350	0.130	3.302	5.500	24.464	0.210	5.33	0.026	0.66	7.00	MW	C	N
0.172	4.369	B-56	0.41	10.414	0.116	2.946	66.00	11.550	0.070	1.778	4.600	20.461	0.200	5.08	0.028	0.71	6.00	SST	C	N
0.172	4.369	EE-85	0.41	10.414	0.112	2.845	74.00	12.950	0.110	2.794	8.400	37.363	0.260	6.60	0.030	0.76	7.50	MW	C	N
0.172	4.369	J-3	0.41	10.414	0.096	2.438	208.00	36.400	0.050	1.270	11.000	48.928	0.300	7.62	0.038	0.97	8.00	SPR	CG	Z
0.172	4.369	12642	0.42	10.668	0.112	2.845	59.00	10.325	0.090	2.286	5.600	24.909	0.240	6.10	0.030	0.76	8.00	SST	CG	N
0.172	4.369	S-1463	0.44	11.176	0.160	4.064	0.06	0.011	0.380	9.652	0.020	0.089	0.050	1.27	0.006	0.15	8.00	SST	C	N
0.172	4.369	I-6	0.44	11.176	0.152	3.861	0.16	0.028	0.200	5.080	0.030	0.133	0.240	6.10	0.010	0.25	23.00	MW	C	BO
0.172	4.369	3795	0.44	11.176	0.144	3.658	2.00	0.350	0.310	7.874	0.620	2.758	0.130	3.30	0.014	0.36	9.00	MW	CG	Z
0.172	4.369	B5-5	0.44	11.176	0.136	3.454	7.20	1.260	0.280	7.112	2.000	8.896	0.160	4.06	0.018	0.46	7.75	MW	C	N
0.172	4.369	JJ-66	0.44	11.176	0.136	3.454	3.40	0.595	0.210	5.334	0.730	3.247	0.230	5.84	0.018	0.46	12.50	SST	CG	N
0.172	4.369	NN-23	0.44	11.176	0.134	3.404	11.00	1.925	0.140	3.556	1.600	7.117	0.130	3.30	0.019	0.48	6.00	SST	C	N
0.172	4.369	FF-74	0.44	11.176	0.132	3.353	9.40	1.645	0.240	6.096	2.200	9.786	0.200	5.08	0.020	0.51	9.00	MW	C	Z
0.172	4.369	M-1	0.44	11.176	0.132	3.353	8.20	1.435	0.220	5.588	1.800	8.006	0.220	5.59	0.020	0.51	10.00	MW	C	Z
0.172	4.369	OO-65	0.44	11.176	0.132	3.353	14.00	2.450	0.190	4.826	2.700	12.010	0.220	5.59	0.020	0.51	9.00	MW	C	Z
0.172	4.369	U-57	0.44	11.176	0.132	3.353	11.00	1.925	0.160	4.064	1.800	8.006	0.160	4.06	0.020	0.51	7.00	SST	C	N
0.172	4.369	V-47	0.44																	




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.172	4.369	B-8	0.56	14.224	0.132	3.353	4.60	0.805	0.250	6.350	1.100	4.893	0.310	7.87	0.020	0.51	14.50	SST	C	N
0.172	4.369	F-17	0.56	14.224	0.120	3.048	26.00	4.550	0.210	5.334	5.500	24.464	0.290	7.37	0.026	0.66	10.00	MW	C	Z
0.172	4.369	K-75	0.56	14.224	0.120	3.048	22.00	3.850	0.240	6.096	5.300	23.574	0.330	8.38	0.026	0.66	11.50	MW	C	N
0.172	4.369	S-142	0.56	14.224	0.108	2.743	48.00	8.400	0.140	3.556	6.700	29.802	0.380	9.65	0.032	0.81	12.00	SST	CG	N
0.172	4.369	S-900	0.59	14.986	0.156	3.962	0.13	0.023	0.500	12.700	0.070	0.311	0.090	2.29	0.008	0.20	10.70	SST	C	N
0.172	4.369	10265	0.59	14.986	0.152	3.861	0.56	0.098	0.500	12.700	0.280	1.245	0.090	2.29	0.010	0.25	8.00	MW	C	N
0.172	4.369	B15-47	0.59	14.986	0.136	3.454	5.20	0.910	0.390	9.906	2.000	8.896	0.200	5.08	0.018	0.46	10.00	MW	C	N
0.172	4.369	U-96	0.59	14.986	0.132	3.353	8.20	1.435	0.330	8.382	2.700	12.010	0.200	5.08	0.020	0.51	10.00	MW	CG	N
0.172	4.369	FF-39	0.59	14.986	0.120	3.048	16.00	2.800	0.210	5.334	3.300	14.678	0.380	9.65	0.026	0.66	13.80	SST	C	N
0.172	4.369	S-487	0.59	14.986	0.114	2.896	30.00	5.250	0.170	4.318	5.100	22.685	0.380	9.65	0.029	0.74	12.00	SST	C	N
0.172	4.369	W-67	0.59	14.986	0.088	2.235	226.00	39.550	0.070	1.778	15.000	66.720	0.460	11.68	0.042	1.07	11.00	SPR	CG	N
0.172	4.369	L-28	0.63	16.002	0.144	3.658	1.20	0.210	0.420	10.668	0.480	2.135	0.210	5.33	0.014	0.36	14.00	MW	C	N
0.172	4.369	A14-18	0.63	16.002	0.136	3.454	6.70	1.173	0.200	5.080	1.300	5.782	0.140	3.56	0.018	0.46	7.50	SST	CG	N
0.172	4.369	S-835	0.63	16.002	0.136	3.454	2.80	0.490	0.340	8.636	0.930	4.137	0.290	7.37	0.018	0.46	15.00	SST	C	N
0.172	4.369	J-44	0.63	16.002	0.128	3.251	14.00	2.450	0.250	6.350	3.600	16.013	0.220	5.59	0.022	0.56	9.00	MW	C	Z
0.172	4.369	AA-65	0.63	16.002	0.122	3.099	14.00	2.450	0.230	5.842	3.100	13.789	0.400	10.16	0.025	0.64	15.00	MW	CG	N
0.172	4.369	A15-17	0.63	16.002	0.120	3.048	23.00	4.025	0.240	6.096	5.500	24.464	0.290	7.37	0.026	0.66	11.00	MW	CG	N
0.172	4.369	2520	0.63	16.002	0.118	2.997	36.00	6.300	0.170	4.318	6.200	27.578	0.270	6.86	0.027	0.69	9.00	MW	C	Z
0.172	4.369	N-109	0.63	16.002	0.112	2.845	37.00	6.475	0.150	3.810	5.600	24.909	0.350	8.89	0.030	0.76	11.50	SST	CG	N
0.172	4.369	B5-4	0.66	16.764	0.130	3.302	8.80	1.540	0.360	9.144	3.200	14.234	0.240	6.10	0.021	0.53	11.30	MW	CG	N
0.172	4.369	S-220	0.66	16.764	0.120	3.048	14.00	2.450	0.240	6.096	3.400	15.123	0.420	10.67	0.026	0.66	15.00	SST	C	N
0.172	4.369	DD-58	0.66	16.764	0.112	2.845	52.00	9.100	0.110	2.794	5.600	24.909	0.270	6.86	0.030	0.76	9.00	SST	CG	N
0.172	4.369	FF-38	0.66	16.764	0.112	2.845	34.00	5.950	0.160	4.064	5.600	24.909	0.380	9.65	0.030	0.76	12.50	SST	CG	N
0.172	4.369	11364	0.69	17.526	0.132	3.353	5.30	0.928	0.340	8.636	1.800	8.006	0.280	7.11	0.020	0.51	13.00	SST	C	N
0.172	4.369	S-1227	0.69	17.526	0.132	3.353	3.40	0.595	0.290	7.366	0.960	4.270	0.400	10.16	0.020	0.51	19.00	SST	C	N
0.172	4.369	FF-17	0.69	17.526	0.128	3.251	11.00	1.925	0.220	5.588	2.400	10.675	0.240	6.10	0.022	0.56	10.00	SST	C	N
0.172	4.369	L-93	0.72	18.288	0.128	3.251	8.10	1.418	0.380	9.652	3.100	13.789	0.340	8.64	0.022	0.56	14.30	MW	C	Z
0.172	4.369	B7-48	0.72	18.288	0.122	3.099	17.00	2.975	0.290	7.366	4.900	21.795	0.310	7.87	0.025	0.64	12.30	MW	CG	N
0.172	4.369	B-13	0.72	18.288	0.120	3.048	16.00	2.800	0.230	5.842	3.700	16.458	0.380	9.65	0.026	0.66	13.50	SST	C	N
0.172	4.369	PP-22	0.72	18.288	0.098	2.489	108.00	18.900	0.090	2.286	9.700	43.146	0.440	11.18	0.037	0.94	11.00	SST	C	N
0.172	4.369	PP-26	0.75	19.050	0.156	3.962	0.13	0.023	0.650	16.510	0.090	0.400	0.100	2.54	0.008	0.20	12.00	MW	C	N
0.172	4.369	WW-31	0.75	19.050	0.146	3.708	0.89	0.156	0.580	14.732	0.520	2.313	0.170	4.32	0.013	0.33	12.00	SST	C	N
0.172	4.369	11457	0.75	19.050	0.144	3.658	1.60	0.280	0.430	10.922	0.670	2.980	0.150	3.81	0.014	0.36	10.00	SST	C	N
0.172	4.369	S-1069	0.75	19.050	0.144	3.658	0.87	0.152	0.510	12.954	0.450	2.002	0.240	6.10	0.014	0.36	16.00	SST	C	N
0.172	4.369	O-110	0.75	19.050	0.142	3.607	2.40	0.420	0.500	12.700	1.200	5.338	0.150	3.81	0.015	0.38	10.00	MW	CG	N
0.172	4.369	3582	0.75	19.050	0.140	3.556	2.30	0.403	0.530	13.462	1.200	5.338	0.220	5.59	0.016	0.41	13.00	MW	C	GI
0.172	4.369	MM-21	0.75	19.050	0.140	3.556	1.80	0.315	0.510	12.954	0.900	4.003	0.240	6.10	0.016	0.41	14.00	MW	O	Z
0.172	4.369	A12-26	0.75	19.050	0.132	3.353	5.50	0.963	0.450	11.430	2.500	11.120	0.300	7.62	0.020	0.51	14.00	MW	C	Z
0.172	4.369	KK-15	0.75	19.050	0.132	3.353	6.70	1.173	0.270	6.858	1.800	8.006	0.230	5.84	0.020	0.51	10.50	SST	C	N
0.172	4.369	B-75	0.75	19.050	0.130	3.302	8.10	1.418	0.390	9.096	3.200	14.234	0.270	6.86	0.021	0.53	12.00	MW	C	Z
0.172	4.369	J-93	0.75	19.050	0.090	2.286	139.00	24.325	0.100	2.540	14.000	62.272	0.620	15.75	0.041	1.04	15.00	SPR	CG	N
0.172	4.369	B10-38	0.81	20.574	0.152	3.861	0.29	0.051	0.670	17.018	0.200	0.890	0.150	3.81	0.010	0.25	13.50	MW	C	N
0.172	4.369	W-36	0.84	21.336	0.110	2.794	43.00	7.525	0.210	5.334	9.200	40.922	0.430	10.92	0.031	0.79	13.00	MW	C	N
0.172	4.369	G-56	0.88	22.352	0.142	3.607	1.30	0.228	0.620	15.748	0.830	3.692	0.260	6.60	0.015	0.38	16.00	MW	C	N
0.172	4.369	1829	0.88	22.352	0.140	3.556	1.80	0.315	0.600	15.240	1.100	4.893	0.270	6.86	0.016	0.41	16.00	MW	C	Z
0.172	4.369	B-59	0.88	22.352	0.138	3.505	2.30	0.403	0.590	14.986	1.300	5.782	0.290	7.37	0.017	0.43	16.00	MW	C	N
0.172	4.369	G-38	0.88	22.352	0.130	3.302	4.80	0.840	0.460	11.684	2.200	9.786	0.420	10.67	0.021	0.53	19.00	MW	C	Z
0.172	4.369	10186	0.88	22.352	0.128	3.251	8.30	1.453	0.430	10.922	3.600	16.013	0.330	8.38	0.022	0.56	14.00	MW	C	Z
0.172	4.369	V-56	0.88	22.352	0.128	3.251	5.90	1.033	0.440	11.176	2.600	11.565	0.440	11.18	0.022	0.56	19.00	MW	C	N
0.172	4.369	S-1693	0.89	22.606	0.124	3.150	9.80	1.715	0.310	7.874	3.100	13.789	0.360	9.14	0.024	0.61	15.00	SST	CG	N
0.172	4.369	O-042	0.94	23.876	0.140	3.556	2.10	0.368	0.690	17.526	1.400	6.227	0.240	6.10	0.016	0.41	14.00	MW	C	Z
0.172	4.369	Z-79	0.94	23.876	0.108	2.743	37.00	6.475	0.180	4.572	6.700	29.802	0.510	12.95	0.032	0.81	15.00	SST	C	N
0.172	4.369	J-9	1.00	25.400	0.150	3.810	0.27	0.047	0.790	20.066	0.220	0.979	0.210	5.33	0.011	0.28	18.00	SST	C	N
0.172	4.369	OO-81	1.00	25.400	0.148	3.759	0.73	0.128	0.840	21.336	0.610	2.713	0.160	4.06	0.012</					




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends E F N sh									
0.172	4.369	3968	3.00	76.200	0.118	2.997	4.30	0.753	1.300	33.020	5.700	25.354	1.660	42.16	0.027	0.69	60.50	MW	C	N
0.172	4.369	B15-44	3.19	81.026	0.146	3.708	0.33	0.058	2.600	66.040	0.850	3.781	0.440	11.18	0.013	0.33	33.00	MW	C	N
0.175	4.445	B3-49	0.47	11.938	0.103	2.616	98.00	17.150	0.090	2.286	8.900	39.587	0.360	9.14	0.036	0.91	10.00	SST	CG	N
0.18	4.572	70244	0.25	6.350	0.156	3.962	3.60	0.630	0.180	4.572	0.640	2.847	0.050	1.27	0.012	0.30	3.75	MW	CG	N
0.18	4.572	70244S	0.25	6.350	0.156	3.962	3.10	0.543	0.130	3.302	0.410	1.824	0.050	1.27	0.012	0.30	3.75	SST	CG	N
0.18	4.572	70259	0.25	6.350	0.152	3.861	6.00	1.050	0.170	4.318	1.000	4.448	0.060	1.52	0.014	0.36	4.00	MW	CG	N
0.18	4.572	70259S	0.25	6.350	0.152	3.861	5.20	0.910	0.120	3.048	0.640	2.847	0.060	1.52	0.014	0.36	4.00	SST	CG	N
0.18	4.572	70280	0.25	6.350	0.148	3.759	9.00	1.575	0.150	3.810	1.400	6.227	0.070	1.78	0.016	0.41	4.38	MW	CG	N
0.18	4.572	70280S	0.25	6.350	0.148	3.759	7.60	1.330	0.120	3.048	0.900	4.003	0.070	1.78	0.016	0.41	4.38	SST	CG	N
0.18	4.572	70301	0.25	6.350	0.144	3.658	14.00	2.450	0.140	3.556	1.900	8.451	0.080	2.03	0.018	0.46	4.63	MW	CG	N
0.18	4.572	70301S	0.25	6.350	0.144	3.658	11.00	1.925	0.110	2.794	1.300	5.782	0.080	2.03	0.018	0.46	4.63	SST	CG	N
0.18	4.572	70322	0.25	6.350	0.140	3.556	21.00	3.675	0.120	3.048	2.600	11.565	0.090	2.29	0.020	0.51	4.63	MW	CG	N
0.18	4.572	70322S	0.25	6.350	0.140	3.556	18.00	3.150	0.100	2.540	1.700	7.562	0.090	2.29	0.020	0.51	4.63	SST	CG	N
0.18	4.572	70343	0.25	6.350	0.136	3.454	30.00	5.250	0.120	3.048	3.500	15.568	0.110	2.79	0.022	0.56	4.88	MW	CG	N
0.18	4.572	70343S	0.25	6.350	0.136	3.454	25.00	4.375	0.090	2.286	2.300	10.230	0.110	2.79	0.022	0.56	4.88	SST	CG	N
0.18	4.572	A12-37	0.25	6.350	0.136	3.454	30.00	5.250	0.080	2.032	2.300	10.230	0.100	2.54	0.022	0.56	4.50	SST	CG	N
0.18	4.572	70363	0.25	6.350	0.132	3.353	43.00	7.525	0.100	2.540	4.500	20.016	0.120	3.05	0.024	0.61	4.88	MW	CG	N
0.18	4.572	70363S	0.25	6.350	0.132	3.353	37.00	6.475	0.080	2.032	3.000	13.344	0.120	3.05	0.024	0.61	4.88	SST	CG	N
0.18	4.572	70386	0.25	6.350	0.128	3.251	59.00	10.325	0.090	2.286	5.300	23.574	0.130	3.30	0.026	0.66	5.00	MW	CG	N
0.18	4.572	70386S	0.25	6.350	0.128	3.251	50.00	8.750	0.070	1.778	3.600	16.013	0.130	3.30	0.026	0.66	5.00	SST	CG	N
0.18	4.572	70407	0.25	6.350	0.122	3.099	95.00	16.625	0.080	2.032	7.300	32.470	0.150	3.81	0.029	0.74	5.13	MW	CG	N
0.18	4.572	70407S	0.25	6.350	0.122	3.099	81.00	14.175	0.060	1.524	4.900	21.795	0.150	3.81	0.029	0.74	5.13	SST	CG	N
0.18	4.572	B4-67	0.30	7.620	0.152	3.861	2.80	0.490	0.200	5.080	0.550	2.446	0.100	2.54	0.014	0.36	6.25	MW	C	N
0.18	4.572	70245	0.31	7.874	0.156	3.962	3.00	0.525	0.220	5.588	0.640	2.847	0.050	1.27	0.012	0.30	4.13	MW	CG	N
0.18	4.572	70245S	0.31	7.874	0.156	3.962	2.60	0.455	0.160	4.064	0.410	1.824	0.050	1.27	0.012	0.30	4.13	SST	CG	N
0.18	4.572	70260	0.31	7.874	0.152	3.861	4.80	0.840	0.210	5.334	1.000	4.448	0.060	1.52	0.014	0.36	4.50	MW	CG	N
0.18	4.572	70260S	0.31	7.874	0.152	3.861	4.20	0.735	0.150	3.810	0.640	2.847	0.060	1.52	0.014	0.36	4.50	SST	CG	N
0.18	4.572	70281	0.31	7.874	0.148	3.759	7.50	1.313	0.180	4.572	1.400	6.227	0.080	2.03	0.016	0.41	4.88	MW	CG	N
0.18	4.572	70281S	0.31	7.874	0.148	3.759	6.40	1.120	0.140	3.556	0.900	4.003	0.080	2.03	0.016	0.41	4.88	SST	CG	N
0.18	4.572	70302	0.31	7.874	0.144	3.658	11.00	1.925	0.170	4.318	1.900	8.451	0.090	2.29	0.018	0.46	5.13	MW	CG	N
0.18	4.572	70302S	0.31	7.874	0.144	3.658	9.50	1.663	0.130	3.302	1.300	5.782	0.090	2.29	0.018	0.46	5.13	SST	CG	N
0.18	4.572	70323	0.31	7.874	0.140	3.556	16.00	2.800	0.160	4.064	2.600	11.565	0.110	2.79	0.020	0.51	5.50	MW	CG	N
0.18	4.572	70323S	0.31	7.874	0.140	3.556	14.00	2.450	0.130	3.302	1.700	7.562	0.110	2.79	0.020	0.51	5.50	SST	CG	N
0.18	4.572	70344	0.31	7.874	0.136	3.454	24.00	4.200	0.150	3.810	3.500	15.568	0.120	3.05	0.022	0.56	5.63	MW	CG	N
0.18	4.572	70344S	0.31	7.874	0.136	3.454	20.00	3.500	0.110	2.794	2.300	10.230	0.120	3.05	0.022	0.56	5.63	SST	CG	N
0.18	4.572	70364	0.31	7.874	0.132	3.353	33.00	5.775	0.140	3.556	4.500	20.016	0.140	3.56	0.024	0.61	5.88	MW	CG	N
0.18	4.572	70364S	0.31	7.874	0.132	3.353	28.00	4.900	0.110	2.794	3.000	13.344	0.140	3.56	0.024	0.61	5.88	SST	CG	N
0.18	4.572	70387	0.31	7.874	0.128	3.251	47.00	8.225	0.110	2.794	5.300	23.574	0.150	3.81	0.026	0.66	5.88	MW	CG	N
0.18	4.572	70387S	0.31	7.874	0.128	3.251	40.00	7.000	0.090	2.286	3.600	16.013	0.150	3.81	0.026	0.66	5.88	SST	CG	N
0.18	4.572	70408	0.31	7.874	0.122	3.099	74.00	12.950	0.100	2.540	7.300	32.470	0.170	4.32	0.029	0.74	6.00	MW	CG	N
0.18	4.572	70426	0.31	7.874	0.116	2.946	122.00	21.350	0.080	2.032	9.700	43.146	0.180	4.57	0.032	0.81	5.75	MW	CG	N
0.18	4.572	70426S	0.31	7.874	0.116	2.946	104.00	18.200	0.060	1.524	6.500	28.912	0.180	4.57	0.032	0.81	5.75	SST	CG	N
0.18	4.572	70246	0.38	9.652	0.156	3.962	2.30	0.403	0.280	7.112	0.640	2.847	0.060	1.52	0.012	0.30	4.75	MW	CG	N
0.18	4.572	70246S	0.38	9.652	0.156	3.962	2.00	0.350	0.200	5.080	0.410	1.824	0.060	1.52	0.012	0.30	4.75	SST	CG	N
0.18	4.572	70261	0.38	9.652	0.152	3.861	3.90	0.683	0.260	6.604	1.000	4.448	0.070	1.78	0.014	0.36	5.13	MW	CG	N
0.18	4.572	70261S	0.38	9.652	0.152	3.861	3.40	0.595	0.190	4.826	0.640	2.847	0.070	1.78	0.014	0.36	5.13	SST	CG	N
0.18	4.572	70282	0.38	9.652	0.148	3.759	6.00	1.050	0.230	5.842	1.400	6.227	0.090	2.29	0.016	0.41	5.63	MW	CG	N
0.18	4.572	70282S	0.38	9.652	0.148	3.759	5.10	0.893	0.180	4.572	0.900	4.003	0.090	2.29	0.016	0.41	5.63	SST	CG	N
0.18	4.572	70303	0.38	9.652	0.144	3.658	9.20	1.610	0.210	5.334	1.900	8.451	0.110	2.79	0.018	0.46	5.88	MW	CG	N
0.18	4.572	70303S	0.38	9.652	0.144	3.658	7.80	1.365	0.160	4.064	1.300	5.782	0.110	2.79	0.018	0.46	5.88	SST	CG	N
0.18	4.572	70324	0.38	9.652	0.140	3.556	13.00	2.275	0.200	5.080	2.600	11.565	0.130	3.30	0.020	0.51	6.38	MW	CG	N
0.18	4.572	70324S	0.38	9.652	0.140	3.556	11.00	1.925	0.160	4.064	1.700	7.562	0.130	3.30	0.020	0.51	6.38	SST	CG	N
0.18	4.572	70345	0.38	9.652	0.136	3.454	20.00	3.500	0.170	4.318	3.500	15.568	0.140	3.56	0.022	0.56	6.25	MW	CG	N
0.18	4.572	70345S	0.38	9.652	0.136	3.454	17.00	2.975	0.140	3.556	2.300	10.230	0.140	3.56	0.022	0.56	6.25	SST	CG	N
0.18																				




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.18	4.572	70389S	0.44	11.176	0.128	3.251	26.00	4.550	0.130	3.302	3.600	16.013	0.200	5.08	0.026	0.66	7.75	SST	CG	N
0.18	4.572	70410	0.44	11.176	0.122	3.099	48.00	8.400	0.150	3.810	7.300	32.470	0.240	6.10	0.029	0.74	8.13	MW	CG	N
0.18	4.572	70410S	0.44	11.176	0.122	3.099	41.00	7.175	0.120	3.048	4.900	21.795	0.240	6.10	0.029	0.74	8.13	SST	CG	N
0.18	4.572	70428	0.44	11.176	0.116	2.946	79.00	13.825	0.120	3.048	9.700	43.146	0.250	6.35	0.032	0.81	7.88	MW	CG	N
0.18	4.572	70428S	0.44	11.176	0.116	2.946	67.00	11.725	0.100	2.540	6.500	28.912	0.250	6.35	0.032	0.81	7.88	SST	CG	N
0.18	4.572	70445	0.44	11.176	0.110	2.794	115.00	20.125	0.100	2.540	12.000	53.376	0.280	7.11	0.035	0.89	8.13	MW	CG	N
0.18	4.572	70445S	0.44	11.176	0.110	2.794	97.00	16.975	0.080	2.032	8.000	35.584	0.280	7.11	0.035	0.89	8.13	SST	CG	N
0.18	4.572	70248	0.50	12.700	0.156	3.962	1.70	0.298	0.380	9.652	0.640	2.847	0.070	1.78	0.012	0.30	5.75	MW	CG	N
0.18	4.572	70248S	0.50	12.700	0.156	3.962	1.50	0.263	0.280	7.112	0.410	1.824	0.070	1.78	0.012	0.30	5.75	SST	CG	N
0.18	4.572	70263	0.50	12.700	0.152	3.861	2.80	0.490	0.350	8.890	1.000	4.448	0.090	2.29	0.014	0.36	6.25	MW	CG	N
0.18	4.572	70263S	0.50	12.700	0.152	3.861	2.50	0.438	0.260	6.604	0.640	2.847	0.090	2.29	0.014	0.36	6.25	SST	CG	N
0.18	4.572	70284	0.50	12.700	0.148	3.759	4.40	0.770	0.310	7.874	1.400	6.227	0.110	2.79	0.016	0.41	6.88	MW	CG	N
0.18	4.572	70284S	0.50	12.700	0.148	3.759	3.70	0.648	0.240	6.096	0.900	4.003	0.110	2.79	0.016	0.41	6.88	SST	CG	N
0.18	4.572	70305	0.50	12.700	0.144	3.658	6.90	1.208	0.280	7.112	1.900	8.451	0.130	3.30	0.018	0.46	7.13	MW	CG	N
0.18	4.572	70305S	0.50	12.700	0.144	3.658	5.80	1.015	0.220	5.588	1.300	5.782	0.130	3.30	0.018	0.46	7.13	SST	CG	N
0.18	4.572	70326	0.50	12.700	0.140	3.556	9.50	1.663	0.280	7.112	2.600	11.565	0.160	4.06	0.020	0.51	7.88	MW	CG	N
0.18	4.572	70326S	0.50	12.700	0.140	3.556	8.10	1.418	0.220	5.588	1.700	7.562	0.160	4.06	0.020	0.51	7.88	SST	CG	N
0.18	4.572	70347	0.50	12.700	0.136	3.454	14.00	2.450	0.250	6.350	3.500	15.568	0.180	4.57	0.022	0.56	8.00	MW	CG	N
0.18	4.572	70347S	0.50	12.700	0.136	3.454	12.00	2.100	0.190	4.826	2.300	10.230	0.180	4.57	0.022	0.56	8.00	SST	CG	N
0.18	4.572	70367	0.50	12.700	0.132	3.353	19.00	3.325	0.240	6.096	4.500	20.016	0.210	5.33	0.024	0.61	8.63	MW	CG	N
0.18	4.572	70367S	0.50	12.700	0.132	3.353	16.00	2.800	0.180	4.572	3.000	13.344	0.210	5.33	0.024	0.61	8.63	SST	CG	N
0.18	4.572	70390	0.50	12.700	0.128	3.251	27.00	4.725	0.200	5.080	5.300	23.574	0.220	5.59	0.026	0.66	8.63	MW	CG	N
0.18	4.572	70390S	0.50	12.700	0.128	3.251	23.00	4.025	0.160	4.064	3.600	16.013	0.220	5.59	0.026	0.66	8.63	SST	CG	N
0.18	4.572	70411	0.50	12.700	0.122	3.099	42.00	7.350	0.170	4.318	7.300	32.470	0.260	6.60	0.029	0.74	9.13	MW	CG	N
0.18	4.572	70411S	0.50	12.700	0.122	3.099	35.00	6.125	0.140	3.556	4.900	21.795	0.260	6.60	0.029	0.74	9.13	SST	CG	N
0.18	4.572	70429	0.50	12.700	0.116	2.946	65.00	11.375	0.150	3.810	9.700	43.146	0.290	7.37	0.032	0.81	9.13	MW	CG	N
0.18	4.572	70429S	0.50	12.700	0.116	2.946	55.00	9.625	0.120	3.048	6.500	28.912	0.290	7.37	0.032	0.81	9.13	SST	CG	N
0.18	4.572	70446	0.50	12.700	0.110	2.794	99.00	17.325	0.120	3.048	12.000	53.376	0.320	8.13	0.035	0.89	9.13	MW	CG	N
0.18	4.572	70446S	0.50	12.700	0.110	2.794	84.00	14.700	0.100	2.540	8.000	35.584	0.320	8.13	0.035	0.89	9.13	SST	CG	N
0.18	B2-34		0.55	13.970	0.134	3.404	13.00	2.275	0.290	7.366	3.900	17.347	0.220	5.59	0.023	0.58	9.75	MW	CG	N
0.18	4.572	70249	0.56	14.224	0.156	3.962	1.50	0.263	0.430	10.922	0.640	2.847	0.080	2.03	0.012	0.30	6.25	MW	CG	N
0.18	4.572	70249S	0.56	14.224	0.156	3.962	1.30	0.228	0.320	8.128	0.410	1.824	0.080	2.03	0.012	0.30	6.25	SST	CG	N
0.18	4.572	70264	0.56	14.224	0.152	3.861	2.50	0.438	0.410	10.414	1.000	4.448	0.100	2.54	0.014	0.36	6.88	MW	CG	N
0.18	4.572	70264S	0.56	14.224	0.152	3.861	2.20	0.385	0.300	7.620	0.640	2.847	0.100	2.54	0.014	0.36	6.88	SST	CG	N
0.18	4.572	70285	0.56	14.224	0.148	3.759	3.90	0.683	0.350	8.890	1.400	6.227	0.120	3.05	0.016	0.41	7.50	MW	CG	N
0.18	4.572	70285S	0.56	14.224	0.148	3.759	3.30	0.578	0.280	7.112	0.900	4.003	0.120	3.05	0.016	0.41	7.50	SST	CG	N
0.18	4.572	70306	0.56	14.224	0.144	3.658	5.90	1.033	0.330	8.382	1.900	8.451	0.150	3.81	0.018	0.46	8.13	MW	CG	N
0.18	4.572	70306S	0.56	14.224	0.144	3.658	5.00	0.875	0.260	6.604	1.300	5.782	0.150	3.81	0.018	0.46	8.13	SST	CG	N
0.18	4.572	70327	0.56	14.224	0.140	3.556	8.40	1.470	0.310	4.024	2.600	11.565	0.170	4.32	0.020	0.51	8.63	MW	CG	N
0.18	4.572	70327S	0.56	14.224	0.140	3.556	7.20	1.260	0.240	6.096	1.700	7.562	0.170	4.32	0.020	0.51	8.63	SST	CG	N
0.18	4.572	70348	0.56	14.224	0.136	3.454	12.00	2.100	0.290	7.366	3.500	15.568	0.200	5.08	0.022	0.56	9.13	MW	CG	N
0.18	4.572	70348S	0.56	14.224	0.136	3.454	10.00	1.750	0.230	5.842	2.300	10.230	0.200	5.08	0.022	0.56	9.13	SST	CG	N
0.18	4.572	70368	0.56	14.224	0.132	3.353	17.00	2.975	0.270	6.858	4.500	20.016	0.230	5.84	0.024	0.61	9.63	MW	CG	N
0.18	4.572	70368S	0.56	14.224	0.132	3.353	14.00	2.450	0.210	5.334	3.000	13.344	0.230	5.84	0.024	0.61	9.63	SST	CG	N
0.18	4.572	70391	0.56	14.224	0.128	3.251	23.00	4.025	0.230	5.842	5.300	23.574	0.250	6.35	0.026	0.66	9.75	MW	CG	N
0.18	4.572	70391S	0.56	14.224	0.128	3.251	20.00	3.500	0.180	4.572	3.600	16.013	0.250	6.35	0.026	0.66	9.75	SST	CG	N
0.18	4.572	70412	0.56	14.224	0.122	3.099	37.00	6.475	0.200	5.080	7.300	32.470	0.290	7.37	0.029	0.74	10.10	MW	CG	N
0.18	4.572	70412S	0.56	14.224	0.122	3.099	31.00	5.425	0.160	4.064	4.900	21.795	0.290	7.37	0.029	0.74	10.10	SST	CG	N
0.18	4.572	70430	0.56	14.224	0.116	2.946	58.00	10.150	0.170	4.318	9.700	43.146	0.320	8.13	0.032	0.81	10.00	MW	CG	N
0.18	4.572	70430S	0.56	14.224	0.116	2.946	50.00	8.750	0.130	3.302	6.500	28.912	0.320	8.13	0.032	0.81	10.00	SST	CG	N
0.18	4.572	70447	0.56	14.224	0.110	2.794	87.00	15.225	0.140	3.556	12.000	53.376	0.350	8.89	0.035	0.89	10.10	MW	CG	N
0.18	4.572	70447S	0.56	14.224	0.110	2.794	74.00	12.950	0.110	2.794	8.000	35.584	0.350	8.89	0.035	0.89	10.10	SST	CG	N
0.18	4.572	70250	0.63	16.002	0.156	3.962	1.40	0.245	0.460	11.684	0.640	2.847	0.080	2.03	0.012	0.30	6.50	MW	CG	N
0.18	4.572	70250S	0.63	16.002	0.156	3.962	1.20	0.210	0.330	8.382	0.410	1.824	0.080	2.03</td						




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h								
0.18	4.572	70308	0.69	17.526	0.144	3.658	4.60	0.805	0.420	10.668	1.900	8.451	0.180	4.57	0.018	0.46	9.75	MW	CG	N
0.18	4.572	70308S	0.69	17.526	0.144	3.658	3.90	0.683	0.330	8.382	1.300	5.782	0.180	4.57	0.018	0.46	9.75	SST	CG	N
0.18	4.572	70329	0.69	17.526	0.140	3.556	6.70	1.173	0.390	9.906	2.600	11.565	0.210	5.33	0.020	0.51	10.50	MW	CG	N
0.18	4.572	70329S	0.69	17.526	0.140	3.556	5.70	0.998	0.310	7.874	1.700	7.562	0.210	5.33	0.020	0.51	10.50	SST	CG	N
0.18	4.572	70350	0.69	17.526	0.136	3.454	9.60	1.680	0.360	9.144	3.500	15.568	0.240	6.10	0.022	0.56	11.00	MW	CG	N
0.18	4.572	70350S	0.69	17.526	0.136	3.454	8.10	1.418	0.280	7.112	2.300	10.230	0.240	6.10	0.022	0.56	11.00	SST	CG	N
0.18	4.572	70371	0.69	17.526	0.132	3.353	13.00	2.275	0.340	8.636	4.500	20.016	0.280	7.11	0.024	0.61	11.50	MW	CG	N
0.18	4.572	70371S	0.69	17.526	0.132	3.353	11.00	1.925	0.260	6.604	3.000	13.344	0.280	7.11	0.024	0.61	11.50	SST	CG	N
0.18	4.572	70393	0.69	17.526	0.128	3.251	19.00	3.325	0.280	7.112	5.300	23.574	0.300	7.62	0.026	0.66	11.50	MW	CG	N
0.18	4.572	70393S	0.69	17.526	0.128	3.251	16.00	2.800	0.220	5.588	3.600	16.013	0.300	7.62	0.026	0.66	11.50	SST	CG	N
0.18	4.572	70414	0.69	17.526	0.122	3.099	29.00	5.075	0.250	6.350	7.300	32.470	0.350	8.89	0.029	0.74	12.10	MW	CG	N
0.18	4.572	70414S	0.69	17.526	0.122	3.099	25.00	4.375	0.200	5.080	4.900	21.795	0.350	8.89	0.029	0.74	12.10	SST	CG	N
0.18	4.572	70432	0.69	17.526	0.116	2.946	47.00	8.225	0.200	5.080	9.700	43.146	0.380	9.65	0.032	0.81	11.90	MW	CG	N
0.18	4.572	70432S	0.69	17.526	0.116	2.946	40.00	7.000	0.160	4.064	6.500	28.912	0.380	9.65	0.032	0.81	11.90	SST	CG	N
0.18	4.572	70449	0.69	17.526	0.110	2.794	69.00	12.075	0.170	4.318	12.000	53.376	0.430	10.92	0.035	0.89	12.40	MW	CG	N
0.18	4.572	70449S	0.69	17.526	0.110	2.794	58.00	10.150	0.140	3.556	8.000	35.584	0.430	10.92	0.035	0.89	12.40	SST	CG	N
0.18	4.572	70252	0.75	19.050	0.156	3.962	1.10	0.193	0.580	14.732	0.640	2.847	0.090	2.29	0.012	0.30	7.75	MW	CG	N
0.18	4.572	70252S	0.75	19.050	0.156	3.962	0.95	0.166	0.430	10.922	0.410	1.824	0.090	2.29	0.012	0.30	7.75	SST	CG	N
0.18	4.572	70267	0.75	19.050	0.152	3.861	1.90	0.333	0.540	13.716	1.000	4.448	0.120	3.05	0.014	0.36	8.50	MW	CG	N
0.18	4.572	70267S	0.75	19.050	0.152	3.861	1.60	0.280	0.400	10.160	0.640	2.847	0.120	3.05	0.014	0.36	8.50	SST	CG	N
0.18	4.572	70288	0.75	19.050	0.148	3.759	2.70	0.473	0.510	12.954	1.400	6.227	0.160	4.06	0.016	0.41	10.00	MW	CG	N
0.18	4.572	70288S	0.75	19.050	0.148	3.759	2.30	0.403	0.400	10.160	0.900	4.003	0.160	4.06	0.016	0.41	10.00	SST	CG	N
0.18	4.572	70309	0.75	19.050	0.144	3.658	4.10	0.718	0.470	11.938	1.900	8.451	0.190	4.83	0.018	0.46	10.80	MW	CG	N
0.18	4.572	70309S	0.75	19.050	0.144	3.658	3.40	0.595	0.370	9.398	1.300	5.782	0.190	4.83	0.018	0.46	10.80	SST	CG	N
0.18	4.572	70330	0.75	19.050	0.140	3.556	6.20	1.085	0.430	10.922	2.600	11.565	0.220	5.59	0.020	0.51	11.10	MW	CG	N
0.18	4.572	70330S	0.75	19.050	0.140	3.556	5.20	0.910	0.330	8.382	1.700	7.562	0.220	5.59	0.020	0.51	11.10	SST	CG	N
0.18	4.572	70351	0.75	19.050	0.136	3.454	8.60	1.505	0.400	10.160	3.500	15.568	0.260	6.60	0.022	0.56	11.90	MW	CG	N
0.18	4.572	70351S	0.75	19.050	0.136	3.454	7.30	1.278	0.310	7.874	2.300	10.230	0.260	6.60	0.022	0.56	11.90	SST	CG	N
0.18	4.572	70372	0.75	19.050	0.132	3.353	12.00	2.100	0.370	9.398	4.500	20.016	0.300	7.62	0.024	0.61	12.40	MW	CG	N
0.18	4.572	70372S	0.75	19.050	0.132	3.353	10.00	1.750	0.290	7.366	3.000	13.344	0.300	7.62	0.024	0.61	12.40	SST	CG	N
0.18	4.572	70394	0.75	19.050	0.128	3.251	17.00	2.975	0.310	7.874	5.300	23.574	0.330	8.38	0.026	0.66	12.60	MW	CG	N
0.18	4.572	70394S	0.75	19.050	0.128	3.251	14.00	2.450	0.250	6.350	3.600	16.013	0.330	8.38	0.026	0.66	12.60	SST	CG	N
0.18	4.572	B4-33	0.75	19.050	0.128	3.251	14.00	2.450	0.250	6.350	3.600	16.013	0.340	8.64	0.026	0.66	13.00	SST	CG	N
0.18	4.572	70415	0.75	19.050	0.122	3.099	26.00	4.550	0.280	7.112	7.300	32.470	0.380	9.65	0.029	0.74	13.10	MW	CG	N
0.18	4.572	70415S	0.75	19.050	0.122	3.099	22.00	3.850	0.220	5.588	4.900	21.795	0.380	9.65	0.029	0.74	13.10	SST	CG	N
0.18	4.572	70433	0.75	19.050	0.116	2.946	41.00	7.175	0.230	5.842	9.700	43.146	0.420	10.67	0.032	0.81	13.30	MW	CG	N
0.18	4.572	70433S	0.75	19.050	0.116	2.946	35.00	6.125	0.190	4.826	6.500	28.912	0.420	10.67	0.032	0.81	13.30	SST	CG	N
0.18	4.572	70450	0.75	19.050	0.110	2.794	62.00	10.850	0.190	4.826	12.000	53.376	0.470	11.94	0.035	0.89	13.40	MW	CG	N
0.18	4.572	70450S	0.75	19.050	0.110	2.794	53.00	9.275	0.150	3.810	8.000	35.584	0.470	11.94	0.035	0.89	13.40	SST	CG	N
0.18	4.572	70253	0.81	20.574	0.156	3.962	1.00	0.175	0.630	16.002	0.640	2.847	0.100	2.54	0.012	0.30	8.25	MW	CG	N
0.18	4.572	70269	0.81	20.574	0.152	3.861	1.70	0.298	0.600	15.240	1.000	4.448	0.130	3.30	0.014	0.36	9.13	MW	CG	N
0.18	4.572	70269S	0.81	20.574	0.152	3.861	1.50	0.263	0.440	11.176	0.640	2.847	0.130	3.30	0.014	0.36	9.13	SST	CG	N
0.18	4.572	70290	0.81	20.574	0.148	3.759	2.60	0.455	0.520	13.208	1.400	6.227	0.160	4.06	0.016	0.41	10.30	MW	CG	N
0.18	4.572	70290S	0.81	20.574	0.148	3.759	2.20	0.385	0.410	10.414	0.900	4.003	0.160	4.06	0.016	0.41	10.30	SST	CG	N
0.18	4.572	70311	0.81	20.574	0.144	3.658	3.90	0.683	0.490	12.446	1.900	8.451	0.200	5.08	0.018	0.46	11.10	MW	CG	N
0.18	4.572	70311S	0.81	20.574	0.144	3.658	3.30	0.578	0.390	9.906	1.300	5.782	0.200	5.08	0.018	0.46	11.10	SST	CG	N
0.18	4.572	70332	0.81	20.574	0.140	3.556	5.60	0.980	0.470	11.938	2.600	11.565	0.240	6.10	0.020	0.51	12.00	MW	CG	N
0.18	4.572	70332S	0.81	20.574	0.140	3.556	4.80	0.840	0.370	9.398	1.700	7.562	0.240	6.10	0.020	0.51	12.00	SST	CG	N
0.18	4.572	70352	0.81	20.574	0.136	3.454	7.60	1.330	0.460	11.684	3.500	15.568	0.290	7.37	0.022	0.56	13.30	MW	CG	N
0.18	4.572	70352S	0.81	20.574	0.136	3.454	6.50	1.138	0.360	9.144	2.300	10.230	0.290	7.37	0.022	0.56	13.30	SST	CG	N
0.18	4.572	70374	0.81	20.574	0.132	3.353	11.00	1.925	0.410	10.414	4.500	20.016	0.320	8.13	0.024	0.61	13.40	MW	CG	N
0.18	4.572	70374S	0.81	20.574	0.132	3.353	9.40	1.645	0.320	8.128	3.000	13.344	0.320	8.13	0.024	0.61	13.40	SST	CG	N
0.18	4.572	70395	0.81	20.574	0.128	3.251	16.00	2.800	0.340	8.636	5.300	23.574	0.350	8.89	0.026	0.66	13.40	MW	CG	N
0.18	4.572	70395S	0.81	20.574	0.128	3.251	13.00	2.275	0.260	6.										




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.18	4.572	70435	0.88	22.352	0.116	2.946	34.00	5.950	0.290	7.366	9.700	43.146	0.500	12.70	0.032	0.81	15.80	MW CG N
0.18	4.572	70435S	0.88	22.352	0.116	2.946	29.00	5.075	0.230	5.842	6.500	28.912	0.500	12.70	0.032	0.81	15.80	SST CG N
0.18	4.572	70453	0.88	22.352	0.110	2.794	52.00	9.100	0.230	5.842	12.000	53.376	0.540	13.72	0.035	0.89	15.50	MW CG N
0.18	4.572	70453S	0.88	22.352	0.110	2.794	45.00	7.875	0.180	4.572	8.000	35.584	0.540	13.72	0.035	0.89	15.50	SST CG N
0.18	4.572	70255	0.94	23.876	0.156	3.962	0.90	0.158	0.710	18.034	0.640	2.847	0.110	2.79	0.012	0.30	9.00	MW CG N
0.18	4.572	70255S	0.94	23.876	0.156	3.962	0.78	0.137	0.520	13.208	0.410	1.824	0.110	2.79	0.012	0.30	9.00	SST CG N
0.18	4.572	70272	0.94	23.876	0.152	3.861	1.50	0.263	0.670	17.018	1.000	4.448	0.140	3.56	0.014	0.36	10.00	MW CG N
0.18	4.572	70272S	0.94	23.876	0.152	3.861	1.30	0.228	0.490	12.446	0.640	2.847	0.140	3.56	0.014	0.36	10.00	SST CG N
0.18	4.572	70293	0.94	23.876	0.148	3.759	2.30	0.403	0.590	14.986	1.400	6.227	0.180	4.57	0.016	0.41	11.30	MW CG N
0.18	4.572	70293S	0.94	23.876	0.148	3.759	2.00	0.350	0.460	11.684	0.900	4.003	0.180	4.57	0.016	0.41	11.30	SST CG N
0.18	4.572	70314	0.94	23.876	0.144	3.658	3.40	0.595	0.570	14.478	1.900	8.451	0.230	5.84	0.018	0.46	12.50	MW CG N
0.18	4.572	70314S	0.94	23.876	0.144	3.658	2.90	0.508	0.440	11.176	1.300	5.782	0.230	5.84	0.018	0.46	12.50	SST CG N
0.18	4.572	70335	0.94	23.876	0.140	3.556	4.90	0.858	0.530	13.462	2.600	11.565	0.270	6.86	0.020	0.51	13.50	MW CG N
0.18	4.572	70335S	0.94	23.876	0.140	3.556	4.20	0.735	0.420	10.668	1.700	7.562	0.270	6.86	0.020	0.51	13.50	SST CG N
0.18	4.572	70355	0.94	23.876	0.136	3.454	6.80	1.190	0.510	12.954	3.500	15.568	0.320	8.13	0.022	0.56	14.50	MW CG N
0.18	4.572	70355S	0.94	23.876	0.136	3.454	5.80	1.015	0.400	10.160	2.300	10.230	0.320	8.13	0.022	0.56	14.50	SST CG N
0.18	4.572	70377	0.94	23.876	0.132	3.353	9.50	1.663	0.470	11.938	4.500	20.016	0.370	9.40	0.024	0.61	15.30	MW CG N
0.18	4.572	70377S	0.94	23.876	0.132	3.353	8.10	1.418	0.370	9.398	3.000	13.344	0.370	9.40	0.024	0.61	15.30	SST CG N
0.18	4.572	70398	0.94	23.876	0.128	3.251	13.00	2.275	0.410	10.414	5.300	23.574	0.410	10.41	0.026	0.66	15.90	MW CG N
0.18	4.572	70398S	0.94	23.876	0.128	3.251	11.00	1.925	0.320	8.128	3.600	16.013	0.410	10.41	0.026	0.66	15.90	SST CG N
0.18	4.572	70418	0.94	23.876	0.122	3.099	21.00	3.675	0.350	8.890	7.300	32.470	0.470	11.94	0.029	0.74	16.30	MW CG N
0.18	4.572	70418S	0.94	23.876	0.122	3.099	18.00	3.150	0.280	7.112	4.900	21.795	0.470	11.94	0.029	0.74	16.30	SST CG N
0.18	4.572	70436	0.94	23.876	0.116	2.946	32.00	5.600	0.310	7.874	9.700	43.146	0.540	13.72	0.032	0.81	16.80	MW CG N
0.18	4.572	70436S	0.94	23.876	0.116	2.946	27.00	4.725	0.240	6.096	6.500	28.912	0.540	13.72	0.032	0.81	16.80	SST CG N
0.18	4.572	70452	0.94	23.876	0.110	2.794	49.00	8.575	0.240	6.096	12.000	53.376	0.580	14.73	0.035	0.89	16.50	MW CG N
0.18	4.572	70452S	0.94	23.876	0.110	2.794	41.00	7.175	0.190	4.826	8.000	35.584	0.580	14.73	0.035	0.89	16.50	SST CG N
0.18	4.572	70256	1.00	25.400	0.156	3.962	0.80	0.140	0.800	20.320	0.640	2.847	0.120	3.05	0.012	0.30	9.88	MW CG N
0.18	4.572	70256S	1.00	25.400	0.156	3.962	0.69	0.121	0.590	14.986	0.410	1.824	0.120	3.05	0.012	0.30	9.88	SST CG N
0.18	4.572	70273	1.00	25.400	0.152	3.861	1.40	0.245	0.740	18.796	1.000	4.448	0.150	3.81	0.014	0.36	10.90	MW CG N
0.18	4.572	70273S	1.00	25.400	0.152	3.861	1.20	0.210	0.560	14.224	0.640	2.847	0.150	3.81	0.014	0.36	10.90	SST CG N
0.18	4.572	70294	1.00	25.400	0.148	3.759	2.10	0.368	0.660	16.764	1.400	6.227	0.200	5.08	0.016	0.41	12.40	MW CG N
0.18	4.572	70294S	1.00	25.400	0.148	3.759	1.70	0.298	0.520	13.208	0.900	4.003	0.200	5.08	0.016	0.41	12.40	SST CG N
0.18	4.572	70315	1.00	25.400	0.144	3.658	3.20	0.560	0.610	15.494	1.900	8.451	0.240	6.10	0.018	0.46	13.30	MW CG N
0.18	4.572	70315S	1.00	25.400	0.144	3.658	2.70	0.473	0.480	12.192	1.300	5.782	0.240	6.10	0.018	0.46	13.30	SST CG N
0.18	4.572	70336	1.00	25.400	0.140	3.556	4.60	0.805	0.580	14.732	2.600	11.565	0.290	7.37	0.020	0.51	14.40	MW CG N
0.18	4.572	70336S	1.00	25.400	0.140	3.556	3.90	0.683	0.450	11.430	1.700	7.562	0.290	7.37	0.020	0.51	14.40	SST CG N
0.18	4.572	70356	1.00	25.400	0.136	3.454	6.40	1.120	0.540	13.716	3.500	15.568	0.340	8.64	0.022	0.56	15.40	MW CG N
0.18	4.572	70356S	1.00	25.400	0.136	3.454	5.40	0.945	0.420	10.668	2.300	10.230	0.340	8.64	0.022	0.56	15.40	SST CG N
0.18	4.572	70378	1.00	25.400	0.132	3.353	9.00	1.575	0.500	12.700	4.500	20.016	0.380	9.65	0.024	0.61	16.00	MW CG N
0.18	4.572	70378S	1.00	25.400	0.132	3.353	7.70	1.348	0.390	9.906	3.000	13.344	0.380	9.65	0.024	0.61	16.00	SST CG N
0.18	4.572	70399	1.00	25.400	0.128	3.251	12.00	2.100	0.430	10.922	5.300	23.574	0.440	11.18	0.026	0.66	16.80	MW CG N
0.18	4.572	70399S	1.00	25.400	0.128	3.251	10.00	1.750	0.340	8.636	3.600	16.013	0.440	11.18	0.026	0.66	16.80	SST CG N
0.18	4.572	70419	1.00	25.400	0.122	3.099	19.00	3.325	0.380	9.652	7.300	32.470	0.500	12.70	0.029	0.74	17.40	MW CG N
0.18	4.572	70419S	1.00	25.400	0.122	3.099	16.00	2.800	0.300	7.620	4.900	21.795	0.500	12.70	0.029	0.74	17.40	SST CG N
0.18	4.572	70437	1.00	25.400	0.116	2.946	29.00	5.075	0.330	8.382	9.700	43.146	0.570	14.48	0.032	0.81	17.90	MW CG N
0.18	4.572	70437S	1.00	25.400	0.116	2.946	25.00	4.375	0.260	6.604	6.500	28.912	0.570	14.48	0.032	0.81	17.90	SST CG N
0.18	4.572	70454	1.00	25.400	0.110	2.794	46.00	8.050	0.260	6.604	12.000	53.376	0.610	15.49	0.035	0.89	17.50	MW CG N
0.18	4.572	70454S	1.00	25.400	0.110	2.794	39.00	6.825	0.210	5.334	8.000	35.584	0.610	15.49	0.035	0.89	17.50	SST CG N
0.18	4.572	70275	1.13	28.702	0.152	3.861	1.20	0.210	0.840	21.336	1.000	4.448	0.170	4.32	0.014	0.36	12.00	SST CG N
0.18	4.572	70296	1.13	28.702	0.148	3.759	1.90	0.333	0.710	18.034	1.400	6.227	0.210	5.33	0.016	0.41	13.30	MW CG N
0.18	4.572	70296S	1.13	28.702	0.148	3.759	1.60	0.280	0.560	14.224	0.900	4.003	0.210	5.33	0.016	0.41	13.30	SST CG N
0.18	4.572	70317	1.13	28.702	0.144	3.658	2.80	0.490	0.690	17.526	1.900	8.451	0.260	6.60	0.018	0.46	14.60	MW CG N
0.18	4.572	70317S	1.13	28.702	0.144	3.658	2.40	0.420	0.540	13.716	1.300	5.782	0.260	6.60	0.018	0.46	14.60	SST CG N
0.18	4.572	70338	1.13	28.702	0.140	3.556	4.00	0.700	0.650	16.510	2.600	11.565	0.320	8.13	0.020	0.51	16.00	MW CG N
0.18	4.572	70338S	1.13	28.702	0.140	3.556	3.40	0.595	0.510	12.954	1.700	7.562	0.320	8.13	0.020	0.51	16.00	SST CG N
0.18	4.572	70357	1.13	28.702	0.136	3.454	5.70	0.998	0.610	15.494	3.500	15.568	0.380	9.65	0.022	0.56	17.10	




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h								
0.18	4.572	70380	1.25	31.750	0.132	3.353	7.10	1.243	0.630	16.002	4.500	20.016	0.480	12.19	0.024	0.61	19.90	MW	CG	N
0.18	4.572	70380S	1.25	31.750	0.132	3.353	6.00	1.050	0.500	12.700	3.000	13.344	0.480	12.19	0.024	0.61	19.90	SST	CG	N
0.18	4.572	70401	1.25	31.750	0.128	3.251	9.70	1.698	0.550	13.970	5.300	23.574	0.530	13.46	0.026	0.66	20.50	MW	CG	N
0.18	4.572	70401S	1.25	31.750	0.128	3.251	8.20	1.435	0.430	10.922	3.600	16.013	0.530	13.46	0.026	0.66	20.50	SST	CG	N
0.18	4.572	70421	1.25	31.750	0.122	3.099	15.00	2.625	0.480	12.192	7.300	32.470	0.620	15.75	0.029	0.74	21.40	MW	CG	N
0.18	4.572	70421S	1.25	31.750	0.122	3.099	13.00	2.275	0.380	9.652	4.900	21.795	0.620	15.75	0.029	0.74	21.40	SST	CG	N
0.18	4.572	70439	1.25	31.750	0.116	2.946	23.00	4.025	0.420	10.668	9.700	43.146	0.710	18.03	0.032	0.81	22.10	MW	CG	N
0.18	4.572	70439S	1.25	31.750	0.116	2.946	20.00	3.500	0.330	8.382	6.500	28.912	0.710	18.03	0.032	0.81	22.10	SST	CG	N
0.18	4.572	70456	1.25	31.750	0.110	2.794	36.00	6.300	0.330	8.382	12.000	53.376	0.760	19.30	0.035	0.89	21.60	MW	CG	N
0.18	4.572	70456S	1.25	31.750	0.110	2.794	31.00	5.425	0.260	6.604	8.000	35.584	0.760	19.30	0.035	0.89	21.60	SST	CG	N
0.18	4.572	70277	1.38	35.052	0.152	3.861	0.98	0.172	1.000	25.400	1.000	4.448	0.200	5.08	0.014	0.36	14.40	MW	CG	N
0.18	4.572	70277S	1.38	35.052	0.152	3.861	0.83	0.145	0.780	19.812	0.640	2.847	0.200	5.08	0.014	0.36	14.40	SST	CG	N
0.18	4.572	70298	1.38	35.052	0.148	3.759	1.50	0.263	0.940	23.876	1.400	6.227	0.270	6.86	0.016	0.41	16.80	MW	CG	N
0.18	4.572	70298S	1.38	35.052	0.148	3.759	1.20	0.210	0.730	18.542	0.900	4.003	0.270	6.86	0.016	0.41	16.80	SST	CG	N
0.18	4.572	70319	1.38	35.052	0.144	3.658	2.30	0.403	0.840	21.336	1.900	8.451	0.320	8.13	0.018	0.46	17.60	MW	CG	N
0.18	4.572	70319S	1.38	35.052	0.144	3.658	1.90	0.333	0.660	16.764	1.300	5.782	0.320	8.13	0.018	0.46	17.60	SST	CG	N
0.18	4.572	70340	1.38	35.052	0.140	3.556	3.30	0.578	0.810	20.574	2.600	11.565	0.390	9.91	0.020	0.51	19.30	MW	CG	N
0.18	4.572	70340S	1.38	35.052	0.140	3.556	2.80	0.490	0.630	16.002	1.700	7.562	0.390	9.91	0.020	0.51	19.30	SST	CG	N
0.18	4.572	70360	1.38	35.052	0.136	3.454	4.60	0.805	0.750	19.050	3.500	15.568	0.450	11.43	0.022	0.56	20.50	MW	CG	N
0.18	4.572	70360S	1.38	35.052	0.136	3.454	3.90	0.683	0.590	14.986	2.300	10.230	0.450	11.43	0.022	0.56	20.50	SST	CG	N
0.18	4.572	70382	1.38	35.052	0.132	3.353	6.40	1.120	0.700	17.780	4.500	20.016	0.520	13.21	0.024	0.61	21.60	MW	CG	N
0.18	4.572	70382S	1.38	35.052	0.132	3.353	5.40	0.945	0.550	13.970	3.000	13.344	0.520	13.21	0.024	0.61	21.60	SST	CG	N
0.18	4.572	70403	1.38	35.052	0.128	3.251	8.70	1.523	0.610	15.494	5.300	23.574	0.590	14.99	0.026	0.66	22.60	MW	CG	N
0.18	4.572	70403S	1.38	35.052	0.128	3.251	7.40	1.295	0.480	12.192	3.600	16.013	0.590	14.99	0.026	0.66	22.60	SST	CG	N
0.18	4.572	70422	1.38	35.052	0.122	3.099	14.00	2.450	0.530	13.462	7.300	32.470	0.680	17.27	0.029	0.74	23.50	MW	CG	N
0.18	4.572	70422S	1.38	35.052	0.122	3.099	12.00	2.100	0.420	10.668	4.900	21.795	0.680	17.27	0.029	0.74	23.50	SST	CG	N
0.18	4.572	70440	1.38	35.052	0.116	2.946	21.00	3.675	0.460	11.684	9.700	43.146	0.780	19.81	0.032	0.81	24.40	MW	CG	N
0.18	4.572	70440S	1.38	35.052	0.116	2.946	18.00	3.150	0.370	9.398	6.500	28.912	0.780	19.81	0.032	0.81	24.40	SST	CG	N
0.18	4.572	70258	1.50	38.100	0.156	3.962	0.60	0.105	1.100	27.940	0.640	2.847	0.150	3.81	0.012	0.30	12.50	MW	CG	N
0.18	4.572	70258S	1.50	38.100	0.156	3.962	0.52	0.091	0.780	19.812	0.410	1.824	0.150	3.81	0.012	0.30	12.50	SST	CG	N
0.18	4.572	70278	1.50	38.100	0.152	3.861	0.89	0.156	1.100	27.940	1.000	4.448	0.220	5.59	0.014	0.36	15.60	MW	CG	N
0.18	4.572	70278S	1.50	38.100	0.152	3.861	0.75	0.131	0.850	21.590	0.640	2.847	0.220	5.59	0.014	0.36	15.60	SST	CG	N
0.18	4.572	70299	1.50	38.100	0.148	3.759	1.30	0.228	1.000	25.400	1.400	6.227	0.290	7.37	0.016	0.41	18.40	MW	CG	N
0.18	4.572	70299S	1.50	38.100	0.148	3.759	1.10	0.193	0.820	20.828	0.900	4.003	0.290	7.37	0.016	0.41	18.40	SST	CG	N
0.18	4.572	70320	1.50	38.100	0.144	3.658	2.10	0.368	0.940	23.876	1.900	8.451	0.350	8.89	0.018	0.46	19.40	MW	CG	N
0.18	4.572	70320S	1.50	38.100	0.144	3.658	1.70	0.298	0.730	18.542	1.300	5.782	0.350	8.89	0.018	0.46	19.40	SST	CG	N
0.18	4.572	70341	1.50	38.100	0.140	3.556	3.00	0.525	0.890	22.606	2.600	11.565	0.420	10.67	0.020	0.51	21.00	MW	CG	N
0.18	4.572	70341S	1.50	38.100	0.140	3.556	2.50	0.438	0.690	17.526	1.700	7.562	0.420	10.67	0.020	0.51	21.00	SST	CG	N
0.18	4.572	70361	1.50	38.100	0.136	3.454	4.20	0.735	0.820	20.828	3.500	15.568	0.490	12.45	0.022	0.56	22.40	MW	CG	N
0.18	4.572	70361S	1.50	38.100	0.136	3.454	3.60	0.630	0.640	16.256	2.300	10.230	0.490	12.45	0.022	0.56	22.40	SST	CG	N
0.18	4.572	70383	1.50	38.100	0.132	3.353	5.80	1.015	0.770	19.558	4.500	20.016	0.570	14.48	0.024	0.61	23.60	MW	CG	N
0.18	4.572	70383S	1.50	38.100	0.132	3.353	5.00	0.875	0.600	15.240	3.000	13.344	0.570	14.48	0.024	0.61	23.60	SST	CG	N
0.18	4.572	70404	1.50	38.100	0.128	3.251	8.00	1.400	0.660	16.764	5.300	23.574	0.640	16.26	0.026	0.66	24.50	MW	CG	N
0.18	4.572	70404S	1.50	38.100	0.128	3.251	6.80	1.190	0.520	13.208	3.600	16.013	0.640	16.26	0.026	0.66	24.50	SST	CG	N
0.18	4.572	70423	1.50	38.100	0.122	3.099	13.00	2.275	0.580	14.732	7.300	32.470	0.740	18.80	0.029	0.74	25.50	MW	CG	N
0.18	4.572	70423S	1.50	38.100	0.122	3.099	11.00	1.925	0.460	11.684	4.900	21.795	0.740	18.80	0.029	0.74	25.50	SST	CG	N
0.18	4.572	70441	1.50	38.100	0.116	2.946	19.00	3.325	0.500	12.700	9.700	43.146	0.840	21.34	0.032	0.81	26.30	MW	CG	N
0.18	4.572	70441S	1.50	38.100	0.116	2.946	16.00	2.800	0.400	10.160	6.500	28.912	0.840	21.34	0.032	0.81	26.30	SST	CG	N
0.18	4.572	70457	1.50	38.100	0.110	2.794	30.00	4.375	0.320	8.128	8.000	35.584	0.910	23.11	0.035	0.89	25.90	MW	CG	N
0.18	4.572	70300	1.75	44.450	0.148	3.759	1.10	0.193	1.200	30.480	1.400	6.227	0.350	8.89	0.016	0.41	21.60	MW	CG	N
0.18	4.572	70300S	1.75	44.450	0.148	3.759	0.93	0.163	0.970	24.638	0.900	4.003	0.350	8.89	0.016	0.41	21.60	SST	CG	N
0.18	4.572	70321	1.75	44.450	0.144	3.658	1.70	0.298	1.100	27.940	1.900	8.451	0.400	10.16	0.018	0.46	22.40	MW	CG	N
0.18	4.572	70321S	1.75	44.450	0.144	3.658	1.50	0.263	0.860	21.844	1.300	5.782	0.400	10.16	0.018	0.46	22.40	SST	CG	N
0.18	4.572	70342	1.75	44.450</td																




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h						
0.188	4.775	00-60	0.19	4.826	0.160	4.064	11.00	1.925	0.090	2.286	0.970	4.315	0.060	1.52	0.014	0.36	3.00	MW C N
0.188	4.775	AA-33	0.19	4.826	0.156	3.962	8.40	1.470	0.100	2.540	0.870	3.870	0.080	2.03	0.016	0.41	4.00	SST C N
0.188	4.775	CC-5	0.19	4.826	0.140	3.556	110.00	19.250	0.040	1.016	4.300	19.126	0.100	2.54	0.024	0.61	3.00	MW C N
0.188	4.775	V-75	0.19	4.826	0.140	3.556	64.00	11.200	0.040	1.016	2.900	12.899	0.110	2.79	0.024	0.61	3.50	SST C N
0.188	4.775	U-15	0.19	4.826	0.130	3.302	258.00	45.150	0.030	0.762	7.000	31.136	0.120	3.05	0.029	0.74	3.00	MW C Z
0.188	4.775	PP-69	0.22	5.588	0.148	3.759	15.00	2.625	0.100	2.540	1.400	6.227	0.120	3.05	0.020	0.51	5.00	SST C N
0.188	4.775	B1-22	0.23	5.842	0.138	3.505	38.00	6.650	0.080	2.032	3.100	13.789	0.150	3.81	0.025	0.64	5.00	SST C N
0.188	4.775	FF-62	0.25	6.350	0.158	4.013	7.20	1.260	0.150	3.810	1.100	4.893	0.080	2.03	0.015	0.38	4.00	MW C N
0.188	4.775	S-1460	0.25	6.350	0.158	4.013	4.50	0.788	0.160	4.064	0.720	3.203	0.090	2.29	0.015	0.38	4.75	SST C N
0.188	4.775	B9-31	0.25	6.350	0.150	3.810	16.00	2.800	0.140	3.556	2.200	9.786	0.090	2.29	0.019	0.48	4.50	MW CG Z
0.188	4.775	LL-15	0.25	6.350	0.148	3.759	22.00	3.850	0.080	2.032	1.700	7.562	0.100	2.54	0.020	0.51	4.00	SST C N
0.188	4.775	II-2	0.25	6.350	0.144	3.658	26.00	4.550	0.080	2.032	2.200	9.786	0.120	3.05	0.022	0.56	4.50	SST C N
0.188	4.775	A10-6	0.25	6.350	0.142	3.607	30.00	5.250	0.120	3.048	3.800	16.902	0.120	3.05	0.023	0.58	5.00	MW CG GI
0.188	4.775	S-1280	0.25	6.350	0.138	3.505	33.00	5.775	0.090	2.286	3.100	13.789	0.140	3.56	0.025	0.64	5.50	SST CG N
0.188	4.775	EE-3	0.25	6.350	0.136	3.454	52.00	9.100	0.090	2.286	4.900	21.795	0.160	4.06	0.026	0.66	5.00	MW C N
0.188	4.775	O-13	0.25	6.350	0.136	3.454	63.00	11.025	0.080	2.032	5.100	22.685	0.140	3.56	0.026	0.66	4.50	MW C N
0.188	4.775	V-83	0.25	6.350	0.136	3.454	155.00	27.125	0.030	0.762	5.100	22.685	0.100	2.54	0.026	0.66	3.00	MW C N
0.188	4.775	A-44	0.25	6.350	0.132	3.353	64.00	11.200	0.070	1.778	4.200	18.682	0.140	3.56	0.028	0.71	5.00	SST CG N
0.188	4.775	AA-2	0.25	6.350	0.104	2.642	639.00	111.825	0.020	0.508	14.000	62.272	0.190	4.83	0.042	1.07	4.25	SPR CG N
0.188	4.775	G-60	0.28	7.112	0.154	3.912	5.30	0.928	0.160	4.064	0.860	3.825	0.120	3.05	0.017	0.43	6.00	SST C N
0.188	4.775	O-119	0.28	7.112	0.154	3.912	8.10	1.418	0.180	4.572	1.500	6.672	0.100	2.54	0.017	0.43	5.00	MW C N
0.188	4.775	EE-11	0.28	7.112	0.142	3.607	13.00	2.275	0.100	2.540	1.300	5.782	0.180	4.57	0.023	0.58	8.00	SST CG N
0.188	4.775	F-18	0.28	7.112	0.138	3.505	38.00	6.650	0.120	3.048	4.500	20.016	0.160	4.06	0.025	0.64	5.50	MW C Z
0.188	4.775	908	0.31	7.874	0.170	4.318	0.37	0.065	0.240	6.096	0.090	0.400	0.070	1.78	0.009	0.23	6.50	MW C Z
0.188	4.775	FF-7	0.31	7.874	0.170	4.318	0.35	0.061	0.240	6.096	0.090	0.400	0.070	1.78	0.009	0.23	6.75	MW C N
0.188	4.775	A9-2	0.31	7.874	0.164	4.166	1.20	0.210	0.230	5.842	0.260	1.156	0.090	2.29	0.012	0.30	6.25	SST C N
0.188	4.775	10063	0.31	7.874	0.158	4.013	2.90	0.508	0.190	4.826	0.550	2.446	0.120	3.05	0.015	0.38	7.00	MW C GI
0.188	4.775	V-14	0.31	7.874	0.158	4.013	1.60	0.280	0.150	3.810	0.230	1.023	0.170	4.32	0.015	0.38	10.00	SST C N
0.188	4.775	F-76	0.31	7.874	0.156	3.962	5.50	0.963	0.160	4.064	0.870	3.870	0.080	2.03	0.016	0.41	5.00	SST CG N
0.188	4.775	DD-70	0.31	7.874	0.152	3.861	8.40	1.470	0.150	3.810	1.200	5.338	0.110	2.79	0.018	0.46	5.25	SST C N
0.188	4.775	S-1007	0.31	7.874	0.152	3.861	11.00	1.925	0.110	2.794	1.200	5.338	0.100	2.54	0.018	0.46	4.50	SST C N
0.188	4.775	M-119	0.31	7.874	0.150	3.810	17.00	2.975	0.080	2.032	1.400	6.227	0.100	2.54	0.019	0.48	4.00	SST C N
0.188	4.775	2983	0.31	7.874	0.148	3.759	20.00	3.500	0.130	3.302	2.500	11.120	0.110	2.79	0.020	0.51	4.50	MW C Z
0.188	4.775	II-49	0.31	7.874	0.148	3.759	9.90	1.733	0.170	4.318	1.700	7.562	0.140	3.56	0.020	0.51	7.00	MW CG Z
0.188	4.775	DD-12	0.31	7.874	0.144	3.658	22.00	3.850	0.100	2.540	2.200	9.786	0.130	3.30	0.022	0.56	5.00	SST C N
0.188	4.775	J-96	0.31	7.874	0.144	3.658	18.00	3.150	0.180	4.572	3.300	14.678	0.130	3.30	0.022	0.56	6.00	MW CG GI
0.188	4.775	2522	0.31	7.874	0.128	3.251	118.00	20.650	0.070	1.778	7.700	34.250	0.170	4.32	0.030	0.76	4.50	MW C Z
0.188	4.775	A15-7	0.31	7.874	0.122	3.099	117.00	20.475	0.060	1.524	7.300	32.470	0.200	5.08	0.033	0.84	6.00	SPR CG N
0.188	4.775	A9-22	0.34	8.636	0.166	4.216	0.86	0.151	0.270	6.858	0.230	1.023	0.080	2.03	0.011	0.28	6.00	SST C N
0.188	4.775	S-853	0.34	8.636	0.156	3.962	3.60	0.630	0.220	5.588	0.810	3.603	0.120	3.05	0.016	0.41	6.50	SST C N
0.188	4.775	S-1003	0.34	8.636	0.152	3.861	6.40	1.120	0.190	4.826	1.200	5.338	0.130	3.30	0.018	0.46	6.25	SST C N
0.188	4.775	F-66	0.34	8.636	0.136	3.454	39.00	6.825	0.130	3.302	5.100	22.685	0.180	4.57	0.026	0.66	6.00	MW C Z
0.188	4.775	F-16	0.34	8.636	0.122	3.099	114.00	19.950	0.060	1.524	7.300	32.470	0.230	5.84	0.033	0.84	6.00	HD CG Z
0.188	4.775	II-86	0.38	9.652	0.172	4.369	0.14	0.025	0.300	7.620	0.040	0.178	0.080	2.03	0.008	0.20	8.50	SST C N
0.188	4.775	WW-13	0.38	9.652	0.168	4.267	0.75	0.131	0.300	7.620	0.230	1.023	0.060	1.52	0.010	0.25	5.00	SST C N
0.188	4.775	PP-98	0.38	9.652	0.164	4.166	1.10	0.193	0.280	7.112	0.310	1.379	0.100	2.54	0.012	0.30	7.00	MW C N
0.188	4.775	II-14	0.38	9.652	0.156	3.962	4.70	0.823	0.260	6.604	1.200	5.338	0.110	2.79	0.016	0.41	6.00	MW C N
0.188	4.775	B12-17	0.38	9.652	0.152	3.861	8.20	1.435	0.230	5.842	1.800	8.006	0.100	2.54	0.018	0.46	5.75	MW CG N
0.188	4.775	J-39	0.38	9.652	0.150	3.810	8.80	1.540	0.250	6.350	2.200	9.786	0.120	3.05	0.019	0.48	6.50	MW CG N
0.188	4.775	Y-78	0.38	9.652	0.146	3.708	20.00	3.500	0.150	3.810	2.900	12.899	0.130	3.30	0.021	0.53	5.00	MW C N
0.188	4.775	3425	0.38	9.652	0.144	3.658	25.00	4.375	0.130	3.302	3.300	14.678	0.130	3.30	0.022	0.56	5.00	MW C Z
0.188	4.775	JJ-62	0.38	9.652	0.144	3.658	19.00	3.325	0.120	3.048	2.200	9.786	0.120	3.05	0.022	0.56	5.50	SST CG N
0.188	4.775	B5-6	0.38	9.652	0.142	3.607	19.00	3.325	0.200	5.080	3.800	16.902	0.160	4.06	0.023	0.58	6.75	MW CG N
0.188	4.775	10748	0.38	9.652	0.140	3.556	23.00	4.025	0.190	4.826	4.300	19.126	0.190	4.83	0.024	0.61	6.75	MW C N
0.188	4.775	F-87	0.38	9.652	0.136	3.454	33.00	5.775	0.160	4.064	5.100	22.685	0.200	5.08	0.026	0.66	6.75	MW C Z
0.188	4.775	B1-11	0.38	9.652	0.134	3.404	33.00	5.775	0.120	3.048	3.800	16.902	0.190	4.83	0.027	0.69	7.00	SST CG N
0.188	4.775	AA-25	0.38	9.652	0.132	3.353	29.00	5.075	0.110	2.794	3.200	14.234	0.270	6.86	0.028	0.71	8.50	




Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg. Max. Defl. Inches	Sugg. Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Fns'h
mm		mm	mm	N/mm	mm	N	mm	mm				
0.188	4.775	10679	0.44	11.176	0.164	4.166	0.81	0.142	0.330	8.382	0.270	1.201
0.188	4.775	10590	0.44	11.176	0.162	4.115	1.50	0.263	0.330	8.382	0.510	2.268
0.188	4.775	M-8	0.44	11.176	0.152	3.861	6.10	1.068	0.290	7.366	1.800	8.006
0.188	4.775	W-60A	0.44	11.176	0.152	3.861	4.90	0.858	0.250	6.350	1.200	5.338
0.188	4.775	4329	0.44	11.176	0.140	3.556	13.00	2.275	0.160	4.064	2.000	8.896
0.188	4.775	A9-9	0.44	11.176	0.138	3.505	19.00	3.325	0.160	4.064	3.100	13.789
0.188	4.775	F-98	0.44	11.176	0.138	3.505	22.00	3.850	0.210	5.334	4.600	20.461
0.188	4.775	S-1432	0.44	11.176	0.130	3.302	50.00	8.750	0.090	2.286	4.700	20.906
0.188	4.775	F-71	0.44	11.176	0.124	3.150	62.00	10.850	0.110	2.794	6.700	29.802
0.188	4.775	Z-12	0.44	11.176	0.124	3.150	64.00	11.200	0.100	2.540	6.200	27.578
0.188	4.775	S-1512	0.47	11.938	0.164	4.166	1.10	0.193	0.340	8.636	0.390	1.735
0.188	4.775	2553	0.47	11.938	0.148	3.759	11.00	1.925	0.230	5.842	2.500	11.120
0.188	4.775	Y-77	0.47	11.938	0.140	3.556	22.00	3.850	0.190	4.826	4.300	19.126
0.188	4.775	J-78	0.47	11.938	0.138	3.505	26.00	4.550	0.170	4.318	4.600	20.461
0.188	4.775	Q-22	0.47	11.938	0.136	3.454	26.00	4.550	0.190	4.826	5.100	22.685
0.188	4.775	GG-3	0.47	11.938	0.130	3.302	51.00	8.925	0.090	2.286	4.700	20.906
0.188	4.775	FF-59	0.47	11.938	0.126	3.200	55.00	9.625	0.100	2.540	5.700	25.354
0.188	4.775	II-63	0.47	11.938	0.118	2.997	102.00	17.850	0.080	2.032	8.300	36.918
0.188	4.775	M-125	0.47	11.938	0.112	2.845	178.00	31.150	0.060	1.524	10.000	44.480
0.188	4.775	A14-5	0.50	12.700	0.168	4.267	0.26	0.046	0.380	9.652	0.100	0.445
0.188	4.775	11355	0.50	12.700	0.164	4.166	1.30	0.228	0.300	7.620	0.390	1.735
0.188	4.775	GG-18	0.50	12.700	0.160	4.064	0.93	0.163	0.320	8.128	0.290	1.290
0.188	4.775	B5-11	0.50	12.700	0.158	4.013	2.80	0.490	0.380	9.652	1.100	4.893
0.188	4.775	3727	0.50	12.700	0.154	3.912	2.30	0.403	0.270	6.858	0.630	2.802
0.188	4.775	B4-18	0.50	12.700	0.148	3.759	8.10	1.418	0.310	7.874	2.500	11.120
0.188	4.775	CC-61	0.50	12.700	0.148	3.759	8.20	1.435	0.310	7.874	2.500	11.120
0.188	4.775	K-13	0.50	12.700	0.148	3.759	6.20	1.085	0.280	7.112	1.700	7.562
0.188	4.775	NN-29	0.50	12.700	0.146	3.708	9.00	1.575	0.210	5.334	1.900	8.451
0.188	4.775	3530	0.50	12.700	0.144	3.658	8.30	1.453	0.260	6.604	2.100	9.341
0.188	4.775	A13-1	0.50	12.700	0.144	3.658	12.00	2.100	0.280	7.112	3.300	14.678
0.188	4.775	920	0.50	12.700	0.142	3.607	11.00	1.925	0.250	6.350	2.800	12.454
0.188	4.775	FF-27	0.50	12.700	0.140	3.556	28.00	4.900	0.100	2.540	2.900	12.899
0.188	4.775	O-108	0.50	12.700	0.140	3.556	22.00	3.850	0.190	4.826	4.300	19.126
0.188	4.775	VV-69	0.50	12.700	0.140	3.556	16.00	2.800	0.180	4.572	2.900	12.899
0.188	4.775	3986	0.50	12.700	0.138	3.505	26.00	4.550	0.170	4.318	4.600	20.461
0.188	4.775	LL-42	0.50	12.700	0.138	3.505	20.00	3.500	0.220	5.588	4.600	20.461
0.188	4.775	W-69	0.50	12.700	0.134	3.404	18.04	3.157	0.160	4.064	2.900	12.899
0.188	4.775	528	0.50	12.700	0.132	3.353	34.00	5.950	0.190	4.826	6.300	28.022
0.188	4.775	DD-9	0.50	12.700	0.128	3.251	37.00	6.475	0.140	3.556	5.200	23.130
0.188	4.775	EE-29	0.50	12.700	0.128	3.251	30.00	5.250	0.140	3.556	4.200	18.682
0.188	4.775	NN-3	0.50	12.700	0.128	3.251	42.00	7.350	0.180	4.572	7.700	34.250
0.188	4.775	B6-15	0.50	12.700	0.126	3.200	47.00	8.225	0.180	4.572	8.500	37.808
0.188	4.775	PP-82	0.50	12.700	0.124	3.150	44.00	7.700	0.140	3.556	6.200	27.578
0.188	4.775	S-709	0.50	12.700	0.124	3.150	50.00	8.750	0.120	3.048	6.200	27.578
0.188	4.775	F-22	0.50	12.700	0.122	3.099	62.00	10.850	0.120	3.048	7.300	32.470
0.188	4.775	F-89	0.53	13.462	0.136	3.454	23.00	4.025	0.220	5.588	5.100	22.685
0.188	4.775	2637	0.53	13.462	0.132	3.353	27.00	4.725	0.220	5.588	6.100	27.133
0.188	4.775	FF-29	0.56	14.224	0.164	4.166	0.93	0.163	0.450	11.430	0.420	1.868
0.188	4.775	J-21	0.56	14.224	0.158	4.013	1.20	0.210	0.340	8.636	0.400	1.779
0.188	4.775	KK-14	0.56	14.224	0.158	4.013	0.65	0.114	0.230	5.842	0.150	0.667
0.188	4.775	WV-11	0.56	14.224	0.158	4.013	2.40	0.420	0.430	10.922	1.000	4.448
0.188	4.775	H-8	0.56	14.224	0.154	3.912	2.00	0.350	0.320	8.128	0.660	2.936
0.188	4.775	Q-17	0.56	14.224	0.150	3.810	4.40	0.770	0.350	8.890	1.500	6.672
0.188	4.775	3835	0.56	14.224	0.148	3.759	8.20	1.435	0.310	7.874	2.500	11.120
0.188	4.775	EE-6	0.56	14.224	0.148	3.759	11.00	1.925	0.160	4.064	1.700	7.562
0.188	4.775	S-1328	0.56	14.224	0.144	3.658	14.00	2.450	0.150	3.810	2.200	9.786
0.188	4.775	S-831	0.56	14.224	0.144	3.658	7.30	1.278	0.300	7.620	2.200	9.786
0.188	4.775	L-18	0.56	14.224	0.142	3.607	11.00	1.925	0.310	7.874	3.500	15.568
0.188	4.775	2562	0.56	14.224	0.140	3.556	11.00	1.925	0.270	6.858	3.000	13.344
0.188	4.775	S-1269	0.56	14.224	0.140	3.556	15.00	2.625	0.190	4.826	2.900	12.899
0.188	4.775	N-93	0.56	14.224	0.138	3.505	13.00	2.275	0.240	6.096	3.100	13.789
0.188	4.775	S-1116	0.56	14.224	0.138	3.505	15.00	2.625	0.200	5.080	3.100	13.789
0.188	4.775	CC-17	0.56	14.224	0.134	3.404	23.00	4.025	0.240	6.096	5.700	25.354
0.188	4.775	PP-37	0.56	14.224	0.134	3.404	31.00	5.425	0.180	4.572	5.700	25.354
0.188	4.775	II-3	0.56	14.224	0.130	3.302	52.00	9.100	0.140	3.556	7.000	31.136
0.188	4.775	Z-91	0.56	14.224	0.128	3.251	50.00	8.750	0.150	4.318	7.700	34.250
0.188	4.775	N-25	0.56	14.224	0.118	2.997	91.00	15.925	0.090	2.286	7.700	34.250
0.188	4.775	JJ-18	0.59	14.986	0.160	4.064	1.10	0.193	0.410	10.414	0.440	1.957
0.188	4.775	U-100	0.59	14.986	0.160	4.064	1.70	0.298	0.480	12.192	0.840	3.736
0.188	4.775	A9-15	0.59	14.986	0.148	3.759	3.10	0.543	0.270	6.858	0.850	3.781
0.188	4.775	Z-46	0.59	14.986	0.148	3.759	4.80	0.840	0.350	8.890	1.700	7.562
0.188	4.775	B14-43	0.59	14.986	0.146	3.708	6.00	1.050	0.340	8.636	2.000	8.896
0.188	4.775	B4-5	0.59	14.986	0.138	3.505	16.00	2.800	0.290	7.366	4.600	20.461
0.188	4.775	B14-48	0.59	14.986	0.132	3.353	22.00	3.850	0.260	6.604	5.500	24.464
0.188	4.775	V-50	0.59	14.986	0.130	3.302	18.00	3.150	0.170	4.318	3.200	14.234
0.188	4.775	B1-9	0.59	14.986	0.122	3.099	44.00	7.700	0.160	4.064	6.800	30.246
0.188	4.775	F-73	0.59	14.986	0.122	3.099	54.00	9.450	0.140	3.556	7.300	32.470
0.188	4.775	B15-6	0.59	14.986	0.114	2.896	87.00	15.225	0.110	2.794	9.700	43.146
0.188	4.775	10896	0.63	16.002	0.170	4.318	0.16	0.028	0.520	13.208	0.080</td	




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.188	4.775	N-314	0.63	16.002	0.158	4.013	1.80	0.315	0.470	11.938	0.830	3.692	0.150	3.81	0.015	0.38	10.10	MW CG N
0.188	4.775	00-11	0.63	16.002	0.156	3.962	0.86	0.151	0.270	6.858	0.240	1.068	0.350	8.89	0.016	0.41	21.00	SST C N
0.188	4.775	B9-63	0.63	16.002	0.150	3.810	6.50	1.138	0.330	8.382	2.200	9.786	0.150	3.81	0.019	0.48	8.00	MW CG N
0.188	4.775	PP-19	0.63	16.002	0.144	3.658	6.20	1.085	0.300	7.620	1.800	8.006	0.330	8.38	0.022	0.56	14.00	MW C N
0.188	4.775	S-707	0.63	16.002	0.144	3.658	8.10	1.418	0.270	6.858	2.200	9.786	0.240	6.10	0.022	0.56	10.00	SST C N
0.188	4.775	921	0.63	16.002	0.142	3.607	13.00	2.275	0.300	7.620	3.800	16.902	0.240	6.10	0.023	0.58	9.25	MW C Z
0.188	4.775	A-83	0.63	16.002	0.138	3.505	11.00	1.925	0.270	6.858	3.100	13.789	0.330	8.38	0.025	0.64	12.00	SST C N
0.188	4.775	Q-71	0.63	16.002	0.136	3.454	14.00	2.450	0.260	6.604	3.700	16.458	0.360	9.14	0.026	0.66	13.00	MW C Z
0.188	4.775	AA-67	0.63	16.002	0.128	3.251	33.00	5.775	0.240	6.096	7.700	34.250	0.360	9.14	0.030	0.76	11.00	MW C Z
0.188	4.775	NN-84	0.63	16.002	0.124	3.150	54.00	9.450	0.120	3.048	6.700	29.802	0.300	7.62	0.032	0.81	9.50	SPR CG N
0.188	4.775	S-710	0.63	16.002	0.124	3.150	38.00	6.650	0.160	4.064	6.200	27.578	0.390	9.91	0.032	0.81	11.30	SST C N
0.188	4.775	10604	0.63	16.002	0.122	3.099	51.00	8.925	0.140	3.556	7.300	32.470	0.400	10.16	0.033	0.84	11.00	SPR C Z
0.188	4.775	A9-18	0.66	16.764	0.168	4.267	0.24	0.042	0.530	13.462	0.130	0.578	0.130	3.30	0.010	0.25	11.50	SST C N
0.188	4.775	PP-35	0.66	16.764	0.152	3.861	3.40	0.595	0.360	9.144	1.200	5.338	0.200	5.08	0.018	0.46	10.00	SST C N
0.188	4.775	G-9	0.66	16.764	0.140	3.556	13.00	2.275	0.330	8.382	4.300	19.126	0.250	6.35	0.024	0.61	10.50	MW CG N
0.188	4.775	F-69	0.66	16.764	0.136	3.454	18.00	3.150	0.290	7.366	5.100	22.685	0.310	7.87	0.026	0.66	10.80	MW C Z
0.188	4.775	Q-18	0.69	17.526	0.160	4.064	0.53	0.093	0.390	9.906	0.210	0.934	0.290	7.37	0.014	0.36	20.00	SST C N
0.188	4.775	YY-45	0.69	17.526	0.158	4.013	1.60	0.280	0.510	12.954	0.810	3.603	0.180	4.57	0.015	0.38	11.00	MW C N
0.188	4.775	B5-23	0.69	17.526	0.154	3.912	2.60	0.455	0.400	10.160	1.000	4.448	0.170	4.32	0.017	0.43	10.00	SST CG N
0.188	4.775	A9-47	0.69	17.526	0.152	3.861	3.90	0.683	0.470	11.938	1.800	8.006	0.200	5.08	0.018	0.46	10.00	MW C BO
0.188	4.775	O-149	0.69	17.526	0.150	3.810	4.90	0.858	0.450	11.430	2.200	9.786	0.190	4.83	0.019	0.48	10.00	MW CG N
0.188	4.775	I-68	0.69	17.526	0.148	3.759	3.80	0.665	0.390	9.906	1.500	6.672	0.300	7.62	0.020	0.51	14.80	MW CG N
0.188	4.775	G-76	0.69	17.526	0.142	3.607	10.00	1.750	0.380	9.652	3.800	16.902	0.250	6.35	0.023	0.58	11.00	MW CG N
0.188	4.775	PP-15	0.69	17.526	0.138	3.505	22.00	3.850	0.210	5.334	4.600	20.461	0.230	5.84	0.025	0.64	8.00	MW C BO
0.188	4.775	A14-13	0.69	17.526	0.132	3.353	23.00	4.025	0.280	7.112	6.300	28.022	0.330	8.38	0.028	0.71	11.80	MW CG GI
0.188	4.775	B9-36	0.69	17.526	0.130	3.302	27.00	4.725	0.260	6.604	7.000	31.136	0.330	8.38	0.029	0.74	11.30	MW CG N
0.188	4.775	2610	0.69	17.526	0.124	3.150	45.00	7.875	0.210	5.334	9.300	41.366	0.380	9.65	0.032	0.81	11.00	MW C Z
0.188	4.775	A-30	0.69	17.526	0.122	3.099	52.00	9.100	0.200	5.080	10.000	44.480	0.400	10.16	0.033	0.84	11.00	MW C N
0.188	4.775	F-90	0.69	17.526	0.122	3.099	48.00	8.400	0.150	3.810	7.300	32.470	0.410	10.41	0.033	0.84	11.50	HD C Z
0.188	4.775	QO-7	0.69	17.526	0.108	2.743	105.00	18.375	0.110	2.794	12.000	53.376	0.520	13.21	0.040	1.02	13.00	SPR CG Z
0.188	4.775	2809	0.72	18.288	0.158	4.013	1.80	0.315	0.550	13.970	0.990	4.404	0.170	4.32	0.015	0.38	10.00	MW C Z
0.188	4.775	S-1115	0.72	18.288	0.158	4.013	1.80	0.315	0.400	10.160	0.720	3.203	0.150	3.81	0.015	0.38	9.00	SST C N
0.188	4.775	2584	0.72	18.288	0.156	3.962	1.70	0.298	0.490	12.446	0.850	3.781	0.220	5.59	0.016	0.41	13.00	MW C GI
0.188	4.775	10890	0.72	18.288	0.148	3.759	4.90	0.858	0.460	11.684	2.200	9.786	0.260	6.60	0.020	0.51	12.00	MW CG N
0.188	4.775	F-83	0.72	18.288	0.136	3.454	15.00	2.625	0.330	8.382	5.100	22.685	0.340	8.64	0.026	0.66	12.00	MW C Z
0.188	4.775	S-1333	0.75	19.050	0.166	4.216	0.48	0.084	0.630	16.002	0.300	1.334	0.110	2.79	0.011	0.28	9.00	SST C N
0.188	4.775	KK-96	0.75	19.050	0.160	4.064	0.93	0.163	0.570	14.478	0.530	2.357	0.180	4.57	0.014	0.36	12.00	SST C N
0.188	4.775	U-25	0.75	19.050	0.158	4.013	0.73	0.128	0.450	11.430	0.330	1.468	0.300	7.62	0.015	0.38	19.00	SST C N
0.188	4.775	V-72	0.75	19.050	0.156	3.962	2.10	0.368	0.560	14.224	1.100	4.893	0.190	4.83	0.016	0.41	11.00	MW C N
0.188	4.775	3927	0.75	19.050	0.154	3.912	2.70	0.473	0.550	13.970	1.500	6.672	0.200	5.08	0.017	0.43	11.00	MW C Z
0.188	4.775	10184	0.75	19.050	0.152	3.861	3.60	0.630	0.510	12.954	1.800	8.006	0.210	5.33	0.018	0.46	10.50	MW C Z
0.188	4.775	00-57	0.75	19.050	0.152	3.861	2.50	0.438	0.500	12.700	1.200	5.338	0.250	6.35	0.018	0.46	13.00	SST C N
0.188	4.775	A15-23	0.75	19.050	0.144	3.658	7.50	1.313	0.440	11.176	3.300	14.678	0.260	6.60	0.022	0.56	12.00	MW CG N
0.188	4.775	B7-14	0.75	19.050	0.144	3.658	7.70	1.348	0.430	10.922	3.300	14.678	0.250	6.35	0.022	0.56	11.50	MW CG Z
0.188	4.775	S-708	0.75	19.050	0.144	3.658	6.50	1.138	0.340	8.636	2.200	9.786	0.290	7.37	0.022	0.56	12.00	SST C N
0.188	4.775	A15-18	0.75	19.050	0.138	3.505	12.00	2.100	0.380	9.652	4.600	20.461	0.330	8.38	0.025	0.64	13.00	MW CG N
0.188	4.775	HH-42	0.75	19.050	0.128	3.251	23.00	4.025	0.300	7.620	6.800	30.246	0.450	11.43	0.030	0.76	15.00	MW CG N
0.188	4.775	NN-89	0.75	19.050	0.128	3.251	20.00	3.500	0.260	6.604	5.200	23.130	0.470	11.94	0.030	0.76	15.50	SST CG N
0.188	4.775	NN-42	0.75	19.050	0.126	3.200	25.00	4.375	0.220	5.588	5.700	25.354	0.430	10.92	0.031	0.79	14.00	SST CG N
0.188	4.775	F-85	0.75	19.050	0.124	3.150	34.00	5.950	0.200	5.080	6.700	29.802	0.480	12.19	0.032	0.81	14.00	SPR C Z
0.188	4.775	S-711	0.75	19.050	0.124	3.150	31.00	5.425	0.200	5.080	6.200	27.578	0.460	11.68	0.032	0.81	13.50	SST C N
0.188	4.775	U-77	0.75	19.050	0.118	2.997	59.00	10.325	0.140	3.556	8.300	36.918	0.440	11.18	0.035	0.89	12.50	SPR CG N
0.188	4.775	A9-60	0.78	19.812	0.168	4.267	0.30	0.053	0.660	16.764	0.200	0.890	0.120	3.05	0.010	0.25	10.70	MW C N
0.188	4.775	S-816	0.78	19.812	0.164	4.166	0.69	0.121	0.560	14.224	0.390	1.735	0.120	3.05	0.012	0.30	9.00	SST C N
0.188	4.775	S-3	0.78	19.812	0.158	4.013	0.94	0.165	0.530	13.462	0.500	2.224	0.250	6.35	0.015	0.38	15.50	SST C N
0.188	4.775	A15-16	0.78	19.812	0.156	3.962	1.20	0.210	0.530	13.462	0.660	2.936	0.250	6.35	0.016	0.41	15.50	SST CG N
0.188	4.775	F-70	0.78															




O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg. Max. Defl. Inches	Sugg. Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Fns'h
mm		mm	mm	N/mm	mm	N	mm	mm				
0.188	4.775	S-712	0.88	22.352	0.124	3.150	26.00	4.550	0.240	6.096	6.200	27.578
0.188	4.775	0-85	0.88	22.352	0.110	2.794	67.00	11.725	0.170	4.318	11.000	48.928
0.188	4.775	J-91	0.88	22.352	0.108	2.743	77.00	13.475	0.160	4.064	12.000	53.376
0.188	4.775	B14-23	0.91	23.114	0.154	3.912	3.00	0.525	0.520	13.208	1.600	7.117
0.188	4.775	F-51	0.91	23.114	0.138	3.505	8.30	1.453	0.430	10.922	3.600	16.013
0.188	4.775	V-86	0.91	23.114	0.138	3.505	11.00	1.925	0.430	10.922	4.600	20.461
0.188	4.775	J-58	0.91	23.114	0.136	3.454	12.00	2.100	0.420	10.668	5.100	22.685
0.188	4.775	F-77	0.91	23.114	0.124	3.150	29.00	5.075	0.230	5.842	6.700	29.802
0.188	4.775	FF-65	0.94	23.876	0.152	3.861	1.50	0.263	0.560	14.224	0.850	3.781
0.188	4.775	S-1334	0.94	23.876	0.142	3.607	5.70	0.998	0.440	11.176	2.500	11.120
0.188	4.775	V-27	0.94	23.876	0.142	3.607	6.10	1.068	0.520	13.208	3.200	14.234
0.188	4.775	F-95	0.94	23.876	0.124	3.150	25.00	4.375	0.260	6.604	6.700	29.802
0.188	4.775	H-67	0.97	24.638	0.144	3.658	4.10	0.718	0.530	13.462	2.200	9.786
0.188	4.775	Q-55	1.00	25.400	0.166	4.216	0.17	0.030	0.770	19.558	0.130	0.578
0.188	4.775	152-A	1.00	25.400	0.162	4.115	0.99	0.173	0.790	20.066	0.780	3.469
0.188	4.775	153-A	1.00	25.400	0.160	4.064	1.20	0.210	0.780	19.812	0.970	4.315
0.188	4.775	Q-69	1.00	25.400	0.160	4.064	0.43	0.075	0.630	16.002	0.270	1.201
0.188	4.775	353-A	1.00	25.400	0.156	3.962	2.00	0.350	0.660	16.764	1.300	5.782
0.188	4.775	N-37	1.00	25.400	0.156	3.962	2.30	0.403	0.560	14.224	1.300	5.782
0.188	4.775	352-A	1.00	25.400	0.152	3.861	3.00	0.525	0.620	15.748	1.800	8.006
0.188	4.775	B15-2	1.00	25.400	0.152	3.861	2.00	0.350	0.610	15.494	1.200	5.338
0.188	4.775	154-A	1.00	25.400	0.148	3.759	4.20	0.735	0.600	15.240	2.500	11.120
0.188	4.775	FF-57	1.00	25.400	0.148	3.759	2.70	0.473	0.620	15.748	1.700	7.562
0.188	4.775	V-9	1.00	25.400	0.148	3.759	2.70	0.473	0.620	15.748	1.700	7.562
0.188	4.775	2597	1.00	25.400	0.146	3.708	4.20	0.735	0.630	16.002	2.700	12.010
0.188	4.775	10171	1.00	25.400	0.146	3.708	3.50	0.613	0.580	14.732	2.000	8.896
0.188	4.775	K-85	1.00	25.400	0.144	3.658	6.80	1.190	0.490	12.446	3.300	14.678
0.188	4.775	155-A	1.00	25.400	0.142	3.607	7.00	1.225	0.540	13.716	3.800	16.902
0.188	4.775	3692	1.00	25.400	0.140	3.556	6.50	1.138	0.520	13.208	3.400	15.123
0.188	4.775	B15-2	1.00	25.400	0.138	3.505	9.30	1.628	0.490	12.446	4.600	20.461
0.188	4.775	L-88	1.00	25.400	0.138	3.505	9.40	1.645	0.480	12.192	4.600	20.461
0.188	4.775	LL-55	1.00	25.400	0.138	3.505	10.00	1.750	0.450	11.430	4.600	20.461
0.188	4.775	156-A	1.00	25.400	0.132	3.353	15.00	2.625	0.420	10.668	6.300	28.022
0.188	4.775	B10-20	1.00	25.400	0.124	3.150	26.00	4.550	0.260	6.604	6.700	29.802
0.188	4.775	S-713	1.00	25.400	0.124	3.150	22.00	3.850	0.280	7.112	6.200	27.578
0.188	4.775	1509	1.03	26.162	0.144	3.658	8.20	1.435	0.410	10.414	3.300	14.678
0.188	4.775	A-88	1.06	26.924	0.158	4.013	0.73	0.128	0.760	19.304	0.560	2.491
0.188	4.775	YY-10	1.06	26.924	0.154	3.912	1.80	0.315	0.780	19.812	1.400	6.227
0.188	4.775	W-23	1.06	26.924	0.138	3.505	6.00	1.050	0.500	12.700	3.100	13.789
0.188	4.775	LL-51	1.09	27.686	0.152	3.861	2.20	0.385	0.560	14.224	1.200	5.338
0.188	4.775	M-68	1.09	27.686	0.142	3.607	5.30	0.928	0.480	12.192	2.500	11.120
0.188	4.775	10801	1.13	28.702	0.154	3.912	2.10	0.368	0.500	12.700	1.000	4.448
0.188	4.775	3241	1.13	28.702	0.120	3.048	36.00	6.300	0.310	7.874	11.000	48.928
0.188	4.775	B9-44	1.19	30.226	0.138	3.505	12.00	2.100	0.370	9.398	4.600	20.461
0.188	4.775	B14-24	1.22	30.988	0.156	3.962	1.40	0.245	0.910	23.114	1.300	5.782
0.188	4.775	M-3	1.22	30.988	0.128	3.251	16.00	2.800	0.490	12.446	7.700	34.250
0.188	4.775	10005	1.25	31.750	0.142	3.607	5.10	0.893	0.750	19.050	3.800	16.902
0.188	4.775	GG-17	1.28	32.512	0.148	3.759	2.50	0.438	0.680	17.272	1.700	7.562
0.188	4.775	AA-91	1.28	32.512	0.136	3.454	4.40	0.770	0.370	9.398	1.600	7.117
0.188	4.775	B-50	1.31	33.274	0.162	4.115	0.80	0.140	0.620	15.748	0.490	2.180
0.188	4.775	A11-9	1.34	34.036	0.134	3.404	6.50	1.138	0.630	16.002	4.100	18.237
0.188	4.775	152-B	1.38	35.052	0.162	4.115	0.71	0.124	1.100	27.940	0.780	3.469
0.188	4.775	153-B	1.38	35.052	0.160	4.064	0.91	0.159	1.100	27.940	0.970	4.315
0.188	4.775	10225	1.38	35.052	0.158	4.013	1.30	0.228	0.800	20.320	1.100	4.893
0.188	4.775	353-B	1.38	35.052	0.156	3.962	1.40	0.245	0.920	23.368	1.300	5.782
0.188	4.775	10678	1.38	35.052	0.154	3.912	1.60	0.280	0.970	24.638	1.600	7.117
0.188	4.775	3588	1.38	35.052	0.152	3.861	1.70	0.298	1.000	25.400	1.700	7.562
0.188	4.775	352-B	1.38	35.052	0.152	3.861	2.10	0.368	0.870	22.098	1.800	8.006
0.188	4.775	UU-64	1.38	35.052	0.152	3.861	1.90	0.333	0.650	16.510	1.200	5.338
0.188	4.775	154-B	1.38	35.052	0.148	3.759	3.00	0.525	0.830	21.082	2.500	11.120
0.188	4.775	B9-70	1.38	35.052	0.148	3.759	2.90	0.508	0.880	22.352	2.500	11.120
0.188	4.775	Q-19	1.38	35.052	0.144	3.658	4.10	0.718	0.810	20.574	3.300	14.678
0.188	4.775	155-B	1.38	35.052	0.142	3.607	5.00	0.875	0.760	19.304	3.800	16.902
0.188	4.775	S-1157	1.38	35.052	0.138	3.505	6.40	1.120	0.480	12.192	3.100	13.789
0.188	4.775	156-B	1.38	35.052	0.132	3.353	11.00	1.925	0.590	14.986	6.300	28.022
0.188	4.775	12024	1.41	35.814	0.150	3.810	2.30	0.403	0.630	16.002	1.400	6.227
0.188	4.775	S-1105	1.44	36.576	0.152	3.861	0.94	0.165	0.860	21.844	0.810	3.603
0.188	4.775	J-74	1.44	36.576	0.138	3.505	5.60	0.980	0.540	13.716	3.100	13.789
0.188	4.775	A10-61	1.44	36.576	0.136	3.454	5.20	0.910	0.660	16.764	3.400	15.123
0.188	4.775	S-1317	1.44	36.576	0.134	3.404	7.50	1.313	0.510	12.954	3.800	16.902
0.188	4.775	S-1071	1.44	36.576	0.132	3.353	8.00	1.400	0.530	13.462	4.200	18.682
0.188	4.775	923	1.50	38.100	0.148	3.759	2.10	0.368	0.980	24.892	2.100	9.341
0.188	4.775	B2-17	1.50	38.100	0.148	3.759	1.80	0.315	0.900	22.860	1.600	7.117
0.188	4.775	11194	1.50	38.100	0.138	3.505	5.60	0.980	0.540	13.716	3.100	13.789
0.188	4.775	11264	1.50	38.100	0.124	3.150	19.00	3.325	0.490	12.446	9.300	41.366
0.188	4.775	11206	1.56	39.624	0.138	3.505	5.80	1.015	0.530	13.462	3.100	13.789
0.188	4.775	Z-3	1.63	41.402	0.168	4.267	0.15	0.026	1.400	35.560	0.210	0.934
0.188	4.775	11240	1.63	41.402	0.128	3.251	11.00	1.925	0.710	18.034	7.700	34.250
0.188	4.775	N-122	1.69	42.926	0.148	3.759	2.50	0.438	1.000	25.400	2.500	11.120




Century Spring

Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.188	4.775	152-C	1.75	44.450	0.162	4.115	0.56	0.098	1.400	35.560	0.780	3,469	0.220	5.59	0.013	0.33	15.80	MW	C	Z
0.188	4.775	153-C	1.75	44.450	0.160	4.064	0.69	0.121	1.400	35.560	0.970	4,315	0.260	6.60	0.014	0.36	17.30	MW	C	Z
0.188	4.775	353-C	1.75	44.450	0.156	3.962	1.10	0.193	1.200	30.480	1.300	5,782	0.320	8.13	0.016	0.41	19.00	MW	C	Z
0.188	4.775	352-C	1.75	44.450	0.152	3.861	1.70	0.298	1.100	27.940	1.800	8,006	0.390	9.91	0.018	0.46	20.80	MW	C	Z
0.188	4.775	2503	1.75	44.450	0.148	3.759	3.50	0.613	0.730	18.542	2.500	11,120	0.340	8.64	0.020	0.51	16.00	MW	C	Z
0.188	4.775	154-C	1.75	44.450	0.148	3.759	2.30	0.403	1.100	27.940	2.500	11,120	0.480	12.19	0.020	0.51	22.80	MW	C	Z
0.188	4.775	NN-34	1.75	44.450	0.148	3.759	2.10	0.368	1.200	30.480	2.500	11,120	0.520	13.21	0.020	0.51	25.00	MW	C	Z
0.188	4.775	PP-84	1.75	44.450	0.146	3.708	2.40	0.420	1.200	30.480	2.800	12,454	0.600	15.24	0.021	0.53	27.50	MW	C	N
0.188	4.775	155-C	1.75	44.450	0.142	3.607	3.90	0.683	0.970	24.638	3.800	16,902	0.600	15.24	0.023	0.58	25.00	MW	C	Z
0.188	4.775	11407	1.75	44.450	0.136	3.454	6.40	1.120	0.790	20.066	5.100	22,685	0.700	17.78	0.026	0.66	26.00	MW	C	Z
0.188	4.775	156-C	1.75	44.450	0.132	3.353	8.30	1.453	0.760	19.304	6.300	28,022	0.810	20.57	0.028	0.71	28.00	MW	C	Z
0.188	4.775	A15-48	1.75	44.450	0.122	3.099	25.00	4.375	0.270	6.858	6.800	30,246	0.610	15.49	0.033	0.84	18.50	SST	CG	N
0.188	4.775	10003	1.88	47.752	0.142	3.607	4.40	0.770	0.860	21.844	3.800	16,902	0.520	13.21	0.023	0.58	22.80	MW	CG	Z
0.188	4.775	2631	1.88	47.752	0.130	3.302	8.30	1.453	0.840	21.336	7.000	31,136	0.960	24.38	0.029	0.74	33.00	MW	CG	Z
0.188	4.775	Y-86	1.88	47.752	0.122	3.099	18.00	3.150	0.400	10.160	7.300	32,470	0.940	23.88	0.033	0.84	27.50	SPR	C	N
0.188	4.775	S-1351	1.88	47.752	0.118	2.997	24.00	4.200	0.320	8.128	7.700	34,250	0.840	21.34	0.035	0.89	24.00	SST	CG	N
0.188	4.775	N-50	1.94	49.276	0.138	3.505	4.70	0.823	0.970	24.638	4.600	20,461	0.780	19.81	0.025	0.64	30.00	MW	C	Z
0.188	4.775	EE-14	2.00	50.800	0.168	4.267	0.08	0.014	1.700	43.180	0.130	0.578	0.320	8.13	0.010	0.25	32.00	SST	CG	N
0.188	4.775	B14-42	2.25	57.150	0.160	4.064	0.50	0.088	1.900	48.260	0.960	4,270	0.340	8.64	0.014	0.36	23.00	MW	C	Z
0.188	4.775	JJ-87	2.25	57.150	0.130	3.302	6.00	1.050	0.920	23.368	5.500	24,464	1.330	33.78	0.029	0.74	45.00	MW	C	BO
0.188	4.775	3575	2.50	63.500	0.130	3.302	5.50	0.963	1.100	27.940	5.800	25,798	1.450	36.83	0.029	0.74	49.00	MW	C	Z
0.188	4.775	N-27	2.53	64.262	0.150	3.810	1.30	0.228	1.700	43.180	2.200	9,786	0.610	15.49	0.019	0.48	32.00	MW	CG	N
0.188	4.775	S-1237	2.75	69.850	0.128	3.251	5.80	1.015	0.890	22.606	5.200	23,130	1.440	36.58	0.030	0.76	47.00	SST	C	N
0.188	4.775	TT-44	2.75	69.850	0.128	3.251	6.80	1.190	1.100	27.940	7.700	34,250	1.410	35.81	0.030	0.76	46.00	MW	C	N
0.188	4.775	B15-43	3.00	76.200	0.136	3.454	2.70	0.473	1.400	35.560	3.800	16,902	1.590	40.39	0.026	0.66	60.00	MW	C	N
0.188	4.775	VV-54	3.13	79.502	0.140	3.556	2.20	0.385	1.300	33,020	2.900	12,899	1.100	27.94	0.024	0.61	45.00	SST	C	N
0.188	4.775	O-72	4.00	101.600	0.148	3.759	1.10	0.193	1.600	40.640	1.700	7,562	0.860	21.84	0.020	0.51	42.00	SST	C	N
0.195	4.953	B4-62	0.47	11.938	0.171	4.343	1.10	0.193	0.360	9.144	0.380	1,690	0.070	1.78	0.012	0.30	6.00	SST	CG	N
0.203	5.156	N-75	0.13	3.302	0.163	4.140	33.00	5.775	0.050	1.270	1.500	6,672	0.080	2.03	0.020	0.51	3.00	SST	C	N
0.203	5.156	G-74	0.19	4.826	0.175	4.445	2.20	0.385	0.100	2.540	0.220	0.979	0.090	2.29	0.014	0.36	5.25	SST	C	N
0.203	5.156	Z-66	0.25	6.350	0.187	4.750	0.09	0.016	0.160	4,064	0.010	0.044	0.090	2.29	0.008	0.20	10.50	MW	C	N
0.203	5.156	3706	0.25	6.350	0.123	3.124	283.00	49.525	0.040	1.016	11.000	48,928	0.200	5.08	0.040	1.02	5.00	SPR	CG	Z
0.203	5.156	V-13	0.28	7.112	0.143	3.632	65.00	11.375	0.070	1.778	4.800	21,350	0.150	3.81	0.030	0.76	5.00	SST	CG	N
0.203	5.156	W-29	0.28	7.112	0.123	3.124	246.00	43.050	0.040	1.016	11.000	48,928	0.200	5.08	0.040	1.02	5.00	SST	CG	N
0.203	5.156	10918	0.31	7.874	0.173	4.394	2.20	0.385	0.190	4,826	0.420	1,868	0.120	3.05	0.015	0.38	7.00	MW	C	GI
0.203	5.156	O-109	0.31	7.874	0.167	4.242	7.90	1.383	0.200	5.080	1.600	7,117	0.110	2.79	0.018	0.46	5.00	MW	C	Z
0.203	5.156	S-1255	0.31	7.874	0.167	4.242	14.00	2.450	0.080	2,032	1.100	4,893	0.080	2.03	0.018	0.46	3.50	SST	C	N
0.203	5.156	2521	0.31	7.874	0.143	3.632	100.00	17.500	0.070	1.778	7.200	32,026	0.160	4.06	0.030	0.76	4.25	MW	C	Z
0.203	5.156	DD-54	0.31	7.874	0.131	3.327	158.00	27.650	0.050	1.270	8.400	37,363	0.200	5.08	0.036	0.91	4.50	SPR	C	Z
0.203	5.156	GG-44	0.34	8.636	0.167	4.242	2.30	0.403	0.130	3.302	0.300	1,334	0.220	5.59	0.018	0.46	11.00	SST	C	N
0.203	5.156	CC-49	0.38	9.652	0.163	4.140	7.70	1.348	0.200	5.080	1.600	7,117	0.150	3.81	0.020	0.51	6.25	SST	C	N
0.203	5.156	W-21	0.38	9.652	0.163	4.140	5.40	0.945	0.220	5.588	1.200	5,338	0.160	4.06	0.020	0.51	8.00	SST	CG	N
0.203	5.156	MM-50	0.38	9.652	0.159	4.039	11.00	1.925	0.200	5.080	2.300	10,230	0.180	4.57	0.022	0.56	7.00	MW	C	GI
0.203	5.156	NN-37	0.38	9.652	0.153	3.886	16.00	2.800	0.160	4,064	2.600	11,565	0.210	5.33	0.025	0.64	7.50	SST	C	N
0.203	5.156	PP-66	0.38	9.652	0.153	3.886	14.00	2.450	0.150	3.810	2.100	9,341	0.230	5.84	0.025	0.64	9.00	MW	CG	BO
0.203	5.156	B-93	0.44	11.176	0.163	4.140	8.30	1.453	0.280	7,112	2.300	10,230	0.150	3.81	0.020	0.51	6.50	MW	C	N
0.203	5.156	Z-70	0.44	11.176	0.143	3.632	44.00	7.700	0.110	2.794	4.800	21,350	0.200	5.08	0.030	0.76	6.50	SST	CG	N
0.203	5.156	10900	0.47	11.938	0.179	4.547	0.95	0.166	0.380	9.652	0.360	1,601	0.080	2.03	0.012	0.30	6.00	SST	C	Z
0.203	5.156	O-88	0.47	11.938	0.175	4.445	1.00	0.175	0.320	8.128	0.330	1,468	0.150	3.81	0.014	0.36	9.88	MW	C	Z
0.203	5.156	DD-62	0.47	11.938	0.163	4.140	6.50	1.138	0.240	6,096	1.600	7,117	0.160	4.06	0.020	0.51	7.00	SST	C	N
0.203	5.156	10839	0.47	11.938	0.159	4,039	6.90	1.208	0.240	6,096	1.700	7,562	0.230	5.84	0.022	0.56	10.30	MW	CG	GI
0.203	5.156	GG-61	0.47	11.938	0.151	3,835	13.00	2.275	0.180	4,572	2.300	10,230	0.290	7.37	0.026	0.66	10.00	SST	C	N
0.203	5.156	GG-59	0.47	11.938	0.143	3,632	32.00	5,600	0.170	4,318	5,400	24,019	0.300	7.62	0.030	0.76	9.00	MW	C	N
0.203	5.156	S-1578	0.47	11.938	0.137	3,480	62.00	10,850	0.100	2,540	6,400	28,467	0.230	5.84	0.033	0.84				




O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg. Max. Defl. Inches	Sugg. Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Fns'h
mm		mm	mm	N/mm	mm	N	mm	mm				
0.203	5.156	00-82	0.63	16.002	0.179	4.547	0.48	0.084	0.480	12.192	0.230	1.023
0.203	5.156	A13-53	0.63	16.002	0.173	4.394	1.90	0.333	0.360	9.144	0.660	2.936
0.203	5.156	2748	0.63	16.002	0.155	3.937	18.00	3.150	0.220	5.588	4.000	17.792
0.203	5.156	3782	0.63	16.002	0.155	3.937	8.30	1.453	0.310	7.874	2.600	11.565
0.203	5.156	B4-10	0.63	16.002	0.153	3.886	9.10	1.593	0.310	7.874	2.800	12.454
0.203	5.156	MM-3	0.69	17.526	0.179	4.547	0.62	0.109	0.580	14.732	0.360	1.601
0.203	5.156	CC-38	0.69	17.526	0.173	4.394	0.95	0.166	0.490	12.446	0.470	2.091
0.203	5.156	RR-38	0.69	17.526	0.171	4.343	1.20	0.210	0.450	11.430	0.540	2.402
0.203	5.156	BB-84	0.69	17.526	0.149	3.785	18.00	3.150	0.300	7.620	5.300	23.574
0.203	5.156	S-1120	0.69	17.526	0.147	3.734	17.00	2.975	0.230	5.842	4.000	17.792
0.203	5.156	B10-12	0.69	17.526	0.131	3.327	175.00	30.625	0.050	1.270	8.400	37.363
0.203	5.156	A11-7	0.72	18.288	0.121	3.073	94.00	16.450	0.120	3.048	11.000	48.928
0.203	5.156	B-95	0.75	19.050	0.179	4.547	0.71	0.124	0.640	16.256	0.460	2.046
0.203	5.156	4291	0.75	19.050	0.173	4.394	0.91	0.159	0.530	13.462	0.480	2.135
0.203	5.156	4171	0.75	19.050	0.165	4.191	5.50	0.963	0.370	9.398	2.000	8.896
0.203	5.156	NN-45	0.75	19.050	0.163	4.140	1.80	0.315	0.330	8.382	0.610	2.713
0.203	5.156	3290	0.75	19.050	0.159	4.039	7.60	1.330	0.410	10.414	3.100	13.789
0.203	5.156	Z-83	0.75	19.050	0.159	4.039	4.40	0.770	0.420	10.668	1.800	8.006
0.203	5.156	B10-17	0.75	19.050	0.153	3.886	18.00	3.150	0.230	5.842	4.200	18.682
0.203	5.156	HH-10	0.75	19.050	0.151	3.835	11.00	1.925	0.280	7.112	3.200	14.234
0.203	5.156	FF-34	0.75	19.050	0.143	3.632	21.00	3.675	0.230	5.842	4.800	21.350
0.203	5.156	BB-24	0.75	19.050	0.123	3.124	57.00	9.975	0.150	3.810	8.500	37.808
0.203	5.156	3235	0.78	19.812	0.149	3.785	12.00	2.100	0.380	9.652	4.400	19.571
0.203	5.156	J-79	0.78	19.812	0.127	3.226	58.00	10.150	0.160	4.064	9.200	40.922
0.203	5.156	II-42	0.81	20.574	0.163	4.140	4.70	0.823	0.500	12.700	2.300	10.230
0.203	5.156	K-98	0.81	20.574	0.163	4.140	2.70	0.473	0.470	11.938	1.300	5.782
0.203	5.156	FF-49	0.81	20.574	0.143	3.632	15.00	2.625	0.320	8.128	4.800	21.350
0.203	5.156	B12-51	0.84	21.336	0.163	4.140	1.70	0.298	0.360	9.144	0.620	2.758
0.203	5.156	B4-16	0.84	21.336	0.147	3.734	11.00	1.925	0.350	8.890	4.000	17.792
0.203	5.156	L-94	0.88	22.352	0.173	4.394	0.52	0.091	0.520	13.208	0.270	1.201
0.203	5.156	AA-38	0.88	22.352	0.133	3.378	40.00	7.000	0.200	5.080	7.700	34.250
0.203	5.156	J-31	0.94	23.876	0.159	4.039	5.20	0.910	0.600	15.240	3.100	13.789
0.203	5.156	A-14	0.97	24.638	0.183	4.648	0.09	0.016	0.740	18.796	0.070	0.311
0.203	5.156	12535	0.97	24.638	0.147	3.734	16.00	2.800	0.360	9.144	5.900	26.243
0.203	5.156	2561	1.00	25.400	0.167	4.242	2.50	0.438	0.680	17.272	1.700	7.562
0.203	5.156	3249	1.00	25.400	0.151	3.835	8.80	1.540	0.540	13.716	4.800	21.350
0.203	5.156	B-1	1.00	25.400	0.145	3.683	10.00	1.750	0.420	10.668	4.400	19.571
0.203	5.156	S-1500	1.00	25.400	0.145	3.683	23.00	4.025	0.190	4.826	4.400	19.571
0.203	5.156	B-35	1.00	25.400	0.141	3.581	17.00	2.975	0.440	11.176	7.700	34.250
0.203	5.156	12692	1.00	25.400	0.139	3.531	24.00	4.200	0.240	6.096	5.800	25.798
0.203	5.156	11459	1.06	26.924	0.177	4.496	0.71	0.124	0.650	16.510	0.460	2.046
0.203	5.156	HH-8	1.06	26.924	0.153	3.886	5.80	1.015	0.490	12.446	2.800	12.454
0.203	5.156	I-81	1.06	26.924	0.153	3.886	6.20	1.085	0.460	11.684	2.800	12.454
0.203	5.156	A15-63	1.06	26.924	0.151	3.835	9.90	1.733	0.480	12.192	4.800	21.350
0.203	5.156	2811	1.06	26.924	0.147	3.734	8.20	1.435	0.450	11.430	3.700	16.458
0.203	5.156	S-839	1.06	26.924	0.143	3.632	9.90	1.733	0.400	10.160	3.900	17.347
0.203	5.156	A13-60	1.06	26.924	0.139	3.531	13.00	2.275	0.360	9.144	4.800	21.350
0.203	5.156	Z-35	1.13	28.702	0.145	3.683	8.40	1.470	0.460	11.684	3.800	16.902
0.203	5.156	B10-43	1.13	28.702	0.141	3.581	27.00	4.725	0.300	7.620	7.900	35.139
0.203	5.156	PP-23	1.16	29.464	0.133	3.378	29.00	5.075	0.260	6.604	7.700	34.250
0.203	5.156	12285	1.19	30.226	0.123	3.124	61.00	10.675	0.190	4.826	11.000	48.928
0.203	5.156	BB-26	1.22	30.988	0.143	3.632	10.00	1.750	0.480	12.192	4.800	21.350
0.203	5.156	W-23	1.22	30.988	0.143	3.632	14.00	2.450	0.510	12.954	7.200	32.026
0.203	5.156	B2-25	1.25	31.750	0.157	3.988	5.50	0.963	0.640	16.256	3.500	15.568
0.203	5.156	W-74	1.25	31.750	0.143	3.632	9.80	1.715	0.490	12.446	4.800	21.350
0.203	5.156	Q-90	1.31	33.274	0.171	4.343	0.82	0.144	1.000	25.400	0.820	3.647
0.203	5.156	S-481	1.31	33.274	0.165	4.191	1.40	0.245	0.920	23.368	1.300	5.782
0.203	5.156	3201	1.34	34.036	0.163	4.140	2.70	0.473	0.870	22.098	2.300	10.230
0.203	5.156	10754	1.41	35.814	0.141	3.581	9.30	1.628	0.540	13.716	5.000	22.240
0.203	5.156	V-5	1.50	38.100	0.153	3.886	5.00	0.875	0.850	21.590	4.200	18.682
0.203	5.156	10026	1.50	38.100	0.151	3.835	7.40	1.295	0.640	16.256	4.800	21.350
0.203	5.156	3012	1.56	39.624	0.155	3.937	4.60	0.805	0.870	22.098	4.000	17.792
0.203	5.156	2884	1.75	44.450	0.159	4.039	2.50	0.438	1.200	30.480	3.000	13.344
0.203	5.156	10891	1.78	45.212	0.153	3.886	3.00	0.525	0.910	23.114	2.700	12.010
0.203	5.156	12018	2.25	57.150	0.101	2.565	107.00	18.725	0.190	4.826	21.000	93.408
0.203	5.156	S-3140	4.00	101.600	0.143	3.632	3.30	0.578	1.500	38.100	4.800	21.350
0.21	5.334	70460	0.25	6.350	0.174	4.420	11.00	1.925	0.150	3.810	1.700	7.562
0.21	5.334	70460S	0.25	6.350	0.174	4.420	9.40	1.645	0.120	3.048	1.100	4.893
0.21	5.334	70476	0.25	6.350	0.166	4.216	22.00	3.850	0.140	3.556	3.000	13.344
0.21	5.334	70476S	0.25	6.350	0.166	4.216	18.00	3.150	0.110	2.794	2.000	8.896
0.21	5.334	70498	0.25	6.350	0.158	4.013	41.00	7.175	0.110	2.794	4.600	20.461
0.21	5.334	70498S	0.25	6.350	0.158	4.013	35.00	6.125	0.090	2.286	3.100	13.789
0.21	5.334	70461	0.31	7.874	0.174	4.420	8.60	1.505	0.190	4.826	1.700	7.562
0.21	5.334	70461S	0.31	7.874	0.174	4.420	7.30	1.278	0.150	3.810	1.100	4.893
0.21	5.334	70477	0.31	7.874	0.166	4.216	17.00	2.975	0.180	4.572	3.000	13.344
0.21	5.334	70477S	0.31	7.874	0.166	4.216	14.00	2.450	0.140	3.556	2.000	8.896
0.21	5.334	70499	0.31	7.874	0.158	4.013	32.00	5.600	0.150	3.810	4.600	20.461
0.21	5.334	70499S	0.31	7.874	0.158	4.013	27.00	4.725	0.120	3.048	3.100	13.789
0.21	5.334	70462	0.38	9.652	0.174	4.420	5.80	1.015	0.190	4.826	1.100	4.893




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.21	5.334	70478	0.38	9.652	0.166	4.216	13.00	2.275	0.220	5.588	3.000	13.344	0.130	3.30	0.022	0.56	5.75	MW CG N
0.21	5.334	70478S	0.38	9.652	0.166	4.216	11.00	1.925	0.180	4.572	2.000	8.896	0.130	3.30	0.022	0.56	5.75	SST CG N
0.21	5.334	70500	0.38	9.652	0.158	4.013	25.00	4.375	0.180	4.572	4.600	20.461	0.160	4.06	0.026	0.66	6.25	MW CG N
0.21	5.334	70500S	0.38	9.652	0.158	4.013	21.00	3.675	0.150	3.810	3.100	13.789	0.160	4.06	0.026	0.66	6.25	SST CG N
0.21	5.334	70463	0.44	11.176	0.174	4.420	5.80	1.015	0.290	7.366	1.700	7.562	0.100	2.54	0.018	0.46	5.63	MW CG N
0.21	5.334	70463S	0.44	11.176	0.174	4.420	4.90	0.858	0.220	5.588	1.100	4.893	0.100	2.54	0.018	0.46	5.63	SST CG N
0.21	5.334	70479	0.44	11.176	0.166	4.216	11.00	1.925	0.260	6.604	3.000	13.344	0.140	3.56	0.022	0.56	6.50	MW CG N
0.21	5.334	70479S	0.44	11.176	0.166	4.216	9.70	1.698	0.210	5.334	2.000	8.896	0.140	3.56	0.022	0.56	6.50	SST CG N
0.21	5.334	70501	0.44	11.176	0.158	4.013	21.00	3.675	0.220	5.588	4.600	20.461	0.180	4.57	0.026	0.66	7.00	MW CG N
0.21	5.334	70501S	0.44	11.176	0.158	4.013	18.00	3.150	0.170	4.318	3.100	13.789	0.180	4.57	0.026	0.66	7.00	SST CG N
0.21	5.334	70464	0.50	12.700	0.174	4.420	5.10	0.893	0.330	8.382	1.700	7.562	0.110	2.79	0.018	0.46	6.13	MW CG N
0.21	5.334	70464S	0.50	12.700	0.174	4.420	4.30	0.753	0.250	6.350	1.100	4.893	0.110	2.79	0.018	0.46	6.13	SST CG N
0.21	5.334	70480	0.50	12.700	0.166	4.216	9.90	1.733	0.300	7.620	3.000	13.344	0.160	4.06	0.022	0.56	7.13	MW CG N
0.21	5.334	70480S	0.50	12.700	0.166	4.216	8.40	1.470	0.240	6.096	2.000	8.896	0.160	4.06	0.022	0.56	7.13	SST CG N
0.21	5.334	70502	0.50	12.700	0.158	4.013	18.00	3.150	0.250	6.350	4.600	20.461	0.200	5.08	0.026	0.66	7.75	MW CG N
0.21	5.334	70502S	0.50	12.700	0.158	4.013	16.00	2.800	0.200	5.080	3.100	13.789	0.200	5.08	0.026	0.66	7.75	SST CG N
0.21	5.334	70465	0.56	14.224	0.174	4.420	4.50	0.788	0.370	9.398	1.700	7.562	0.120	3.05	0.018	0.46	6.75	MW CG N
0.21	5.334	70465S	0.56	14.224	0.174	4.420	3.80	0.665	0.290	7.366	1.100	4.893	0.120	3.05	0.018	0.46	6.75	SST CG N
0.21	5.334	70481	0.56	14.224	0.166	4.216	8.70	1.523	0.350	8.890	3.000	13.344	0.170	4.32	0.022	0.56	7.88	MW CG N
0.21	5.334	70481S	0.56	14.224	0.166	4.216	7.40	1.295	0.270	6.858	2.000	8.896	0.170	4.32	0.022	0.56	7.88	SST CG N
0.21	5.334	70503	0.56	14.224	0.158	4.013	16.00	2.800	0.290	7.366	4.600	20.461	0.220	5.59	0.026	0.66	8.50	MW CG N
0.21	5.334	70503S	0.56	14.224	0.158	4.013	14.00	2.450	0.230	5.842	3.100	13.789	0.220	5.59	0.026	0.66	8.50	SST CG N
0.21	5.334	70466	0.63	16.002	0.174	4.420	4.00	0.700	0.410	10.414	1.700	7.562	0.130	3.30	0.018	0.46	7.38	MW CG N
0.21	5.334	70466S	0.63	16.002	0.174	4.420	3.40	0.595	0.320	8.128	1.100	4.893	0.130	3.30	0.018	0.46	7.38	SST CG N
0.21	5.334	70482	0.63	16.002	0.166	4.216	7.80	1.365	0.390	9.906	3.000	13.344	0.190	4.83	0.022	0.56	8.50	MW CG N
0.21	5.334	70482S	0.63	16.002	0.166	4.216	6.60	1.155	0.300	7.620	2.000	8.896	0.190	4.83	0.022	0.56	8.50	SST CG N
0.21	5.334	70504	0.63	16.002	0.158	4.013	14.00	2.450	0.330	8.382	4.600	20.461	0.240	6.10	0.026	0.66	9.38	MW CG N
0.21	5.334	70504S	0.63	16.002	0.158	4.013	12.00	2.100	0.260	6.604	3.100	13.789	0.240	6.10	0.026	0.66	9.38	SST CG N
0.21	5.334	12549	0.67	17.018	0.170	4.318	5.60	0.980	0.410	10.414	2.300	10.230	0.180	4.57	0.020	0.51	8.00	MW C Z
0.21	5.334	70467	0.69	17.526	0.174	4.420	3.60	0.630	0.460	11.684	1.700	7.562	0.140	3.56	0.018	0.46	7.88	MW CG N
0.21	5.334	70467S	0.69	17.526	0.174	4.420	3.10	0.543	0.360	9.144	1.100	4.893	0.140	3.56	0.018	0.46	7.88	SST CG N
0.21	5.334	70483	0.69	17.526	0.166	4.216	6.90	1.208	0.430	10.922	3.000	13.344	0.210	5.33	0.022	0.56	9.38	MW CG N
0.21	5.334	70483S	0.69	17.526	0.166	4.216	5.90	1.033	0.340	8.636	2.000	8.896	0.210	5.33	0.022	0.56	9.38	SST CG N
0.21	5.334	70505	0.69	17.526	0.158	4.013	13.00	2.275	0.360	9.144	4.600	20.461	0.270	6.86	0.026	0.66	10.30	MW CG N
0.21	5.334	70505S	0.69	17.526	0.158	4.013	11.00	1.925	0.280	7.112	3.100	13.789	0.270	6.86	0.026	0.66	10.30	SST CG N
0.21	5.334	70468	0.75	19.050	0.174	4.420	3.30	0.578	0.500	12.700	1.700	7.562	0.150	3.81	0.018	0.46	8.50	MW CG N
0.21	5.334	70468S	0.75	19.050	0.174	4.420	2.80	0.490	0.390	9.906	1.100	4.893	0.150	3.81	0.018	0.46	8.50	SST CG N
0.21	5.334	70484	0.75	19.050	0.166	4.216	6.30	1.103	0.480	12.192	3.000	13.344	0.220	5.59	0.022	0.56	10.00	MW CG N
0.21	5.334	70484S	0.75	19.050	0.166	4.216	5.40	0.945	0.370	9.398	2.000	8.896	0.220	5.59	0.022	0.56	10.00	SST CG N
0.21	5.334	70506	0.75	19.050	0.158	4.013	12.00	2.100	0.390	9.906	4.600	20.461	0.290	7.37	0.026	0.66	11.00	MW CG N
0.21	5.334	70506S	0.75	19.050	0.158	4.013	10.00	1.750	0.310	7.874	3.100	13.789	0.290	7.37	0.026	0.66	11.00	SST CG N
0.21	5.334	70469	0.81	20.574	0.174	4.420	3.00	0.525	0.550	13.970	1.700	7.562	0.160	4.06	0.018	0.46	9.13	MW CG N
0.21	5.334	70469S	0.81	20.574	0.174	4.420	2.60	0.455	0.430	10.922	1.100	4.893	0.160	4.06	0.018	0.46	9.13	SST CG N
0.21	5.334	70485	0.81	20.574	0.166	4.216	5.80	1.015	0.510	12.954	3.000	13.344	0.240	6.10	0.022	0.56	10.80	MW CG N
0.21	5.334	70507	0.81	20.574	0.158	4.013	11.00	1.925	0.430	10.922	4.600	20.461	0.310	7.87	0.026	0.66	11.80	MW CG N
0.21	5.334	70507S	0.81	20.574	0.158	4.013	9.10	1.593	0.340	8.636	3.100	13.789	0.310	7.87	0.026	0.66	11.80	SST CG N
0.21	5.334	70470	0.88	22.352	0.174	4.420	2.80	0.490	0.590	14.986	1.700	7.562	0.170	4.32	0.018	0.46	9.63	MW CG N
0.21	5.334	70470S	0.88	22.352	0.174	4.420	2.40	0.420	0.460	11.684	1.100	4.893	0.170	4.32	0.018	0.46	9.63	SST CG N
0.21	5.334	70486	0.88	22.352	0.166	4.216	5.80	1.015	0.520	13.208	3.000	13.344	0.240	6.10	0.022	0.56	10.80	MW CG N
0.21	5.334	70486S	0.88	22.352	0.166	4.216	4.90	0.858	0.400	10.160	2.000	8.896	0.240	6.10	0.022	0.56	10.80	SST CG N
0.21	5.334	70508	0.88	22.352	0.158	4.013	11.00	1.925	0.440	11.176	4.600	20.461	0.310	7.87	0.026	0.66	12.00	MW CG N
0.21	5.334	70508S	0.88	22.352	0.158	4.013	8.90	1.558	0.350	8.890	3.100	13.789	0.310	7.87	0.026	0.66	12.00	SST CG N
0.21	5.334	70488	0.94	23.876	0.166	4.216	5.30	0.928	0.570	14.478	3.000	13.344	0.260	6.60	0.022	0.56	11.60	MW CG N
0.21	5.334	70488S	0.94	23.876	0.166	4.216	4.50	0.788	0.440	11.176	2.000	8.896	0.260	6.60	0.022	0.56	11.60	SST CG N
0.21	5.334	70510	0.94	23.876	0.158	4.013	9.70	1.698	0.480	12.192	4.600	20.461	0.330	8.38	0.026	0.66	12.90	MW CG N
0.21	5.334	70510S	0.94	23.876	0.158	4.013	8.20	1.435	0.370	9.398	3.100	13.789	0.330	8.38	0.026	0.66	12.90	SST CG N
0.21	5.334	70471	1.00	25.400	0.174	4.420												




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
0.21	5.334	70495S	1.50	38.100	0.166	4.216	2.60	0.455	0.780	19.812	2.000	8.896	0.410	10.41	0.022	0.56	18.80	SST	CG	N
0.21	5.334	70517	1.50	38.100	0.158	4.013	5.60	0.980	0.820	20.828	4.600	20.461	0.540	13.72	0.026	0.66	20.80	MW	CG	N
0.21	5.334	70517S	1.50	38.100	0.158	4.013	4.80	0.840	0.650	16.510	3.100	13.789	0.540	13.72	0.026	0.66	20.80	SST	CG	N
0.21	5.334	70474	1.75	44.450	0.174	4.420	1.40	0.245	1.200	30.480	1.700	7.562	0.310	7.87	0.018	0.46	17.30	MW	CG	N
0.21	5.334	70474S	1.75	44.450	0.174	4.420	1.20	0.210	0.930	23.622	1.100	4.893	0.310	7.87	0.018	0.46	17.30	SST	CG	N
0.21	5.334	70496	1.75	44.450	0.166	4.216	2.90	0.508	1.000	25.400	3.000	13.344	0.430	10.92	0.022	0.56	19.50	MW	CG	N
0.21	5.334	70496S	1.75	44.450	0.166	4.216	2.50	0.438	0.810	20.574	2.000	8.896	0.430	10.92	0.022	0.56	19.50	SST	CG	N
0.21	5.334	70518	1.75	44.450	0.158	4.013	5.10	0.893	0.910	23.114	4.600	20.461	0.590	14.99	0.026	0.66	22.60	MW	CG	N
0.21	5.334	70475	2.00	50.800	0.174	4.420	1.20	0.210	1.400	35.560	1.700	7.562	0.360	9.14	0.018	0.46	19.80	MW	CG	N
0.21	5.334	70475S	2.00	50.800	0.174	4.420	1.00	0.175	1.100	27.940	1.100	4.893	0.360	9.14	0.018	0.46	19.80	SST	CG	N
0.21	5.334	70497	2.00	50.800	0.166	4.216	2.50	0.438	1.200	30.480	3.000	13.344	0.490	12.45	0.022	0.56	22.30	MW	CG	N
0.21	5.334	70497S	2.00	50.800	0.166	4.216	2.10	0.368	0.940	23.876	2.000	8.896	0.490	12.45	0.022	0.56	22.30	SST	CG	N
0.21	5.334	70519	2.00	50.800	0.158	4.013	4.50	0.788	1.000	25.400	4.600	20.461	0.660	16.76	0.026	0.66	25.40	MW	CG	N
0.21	5.334	70519S	2.00	50.800	0.158	4.013	3.80	0.665	0.810	20.574	3.100	13.789	0.660	16.76	0.026	0.66	25.40	SST	CG	N
0.219	5.563	S-863	0.22	5.588	0.179	4.547	13.00	2.275	0.110	2.794	1.400	6.227	0.100	2.54	0.020	0.51	4.00	SST	C	N
0.219	5.563	MM-39	0.25	6.350	0.179	4.547	15.00	2.625	0.150	3.810	2.200	9.786	0.100	2.54	0.020	0.51	4.00	MW	C	Z
0.219	5.563	II-38	0.25	6.350	0.173	4.394	15.00	2.625	0.110	2.794	1.700	7.562	0.140	3.56	0.023	0.58	5.00	SST	C	N
0.219	5.563	G-21	0.31	7.874	0.197	5.004	0.26	0.046	0.180	4.572	0.050	0.222	0.130	3.30	0.011	0.28	11.00	MW	C	BO
0.219	5.563	S-1531	0.31	7.874	0.195	4.953	1.20	0.210	0.250	6.350	0.290	1.290	0.070	1.78	0.012	0.30	4.50	SST	C	N
0.219	5.563	S-1547	0.31	7.874	0.193	4.902	1.60	0.280	0.240	6.096	0.390	1.735	0.070	1.78	0.013	0.33	4.50	SST	C	N
0.219	5.563	A-15	0.31	7.874	0.179	4.547	5.10	0.893	0.150	3.810	0.770	3.425	0.160	4.06	0.020	0.51	7.00	SST	C	N
0.219	5.563	B9-29	0.31	7.874	0.177	4.496	14.00	2.450	0.170	4.318	2.500	11.120	0.090	2.29	0.021	0.53	4.50	MW	CG	N
0.219	5.563	I-67	0.31	7.874	0.169	4.293	19.00	3.325	0.140	3.556	2.600	11.565	0.180	4.57	0.025	0.64	6.00	MW	C	GI
0.219	5.563	A10-18	0.31	7.874	0.167	4.242	27.00	4.725	0.110	2.794	3.000	13.344	0.130	3.30	0.026	0.66	5.00	SST	CG	N
0.219	5.563	S-1553	0.33	8.382	0.195	4.953	1.20	0.210	0.260	6.604	0.310	1.379	0.070	1.78	0.012	0.30	4.50	SST	C	N
0.219	5.563	B14-38	0.34	8.636	0.179	4.547	5.80	1.015	0.180	4.572	1.100	4.893	0.160	4.06	0.020	0.51	7.00	MW	C	N
0.219	5.563	10355	0.38	9.652	0.185	4.699	4.90	0.858	0.270	6.858	1.300	5.782	0.100	2.54	0.017	0.43	5.00	MW	C	N
0.219	5.563	S-1342	0.38	9.652	0.177	4.496	16.00	2.800	0.110	2.794	1.700	7.562	0.110	2.79	0.021	0.53	4.00	SST	C	N
0.219	5.563	Q-6	0.38	9.652	0.175	4.445	8.80	1.540	0.200	5.080	1.800	8.006	0.180	4.57	0.022	0.56	7.00	MW	C	Z
0.219	5.563	BB-7	0.38	9.652	0.145	3.683	97.00	16.975	0.080	2.032	8.000	35.584	0.220	5.59	0.037	0.94	6.00	SST	CG	N
0.219	5.563	LL-41	0.41	10.414	0.199	5.055	0.20	0.035	0.300	7.620	0.060	0.267	0.110	2.79	0.010	0.25	10.00	MW	C	Z
0.219	5.563	10690	0.41	10.414	0.181	4.597	6.90	1.208	0.180	4.572	1.200	5.338	0.110	2.79	0.019	0.48	5.00	SST	C	N
0.219	5.563	B14-17	0.41	10.414	0.179	4.547	9.70	1.698	0.220	5.588	2.200	9.786	0.100	2.54	0.020	0.51	5.00	MW	CG	N
0.219	5.563	3883	0.41	10.414	0.165	4.191	27.00	4.725	0.180	4.572	5.000	22.240	0.160	4.06	0.027	0.69	6.00	MW	CG	GI
0.219	5.563	M-34	0.41	10.414	0.161	4.089	66.00	11.550	0.060	1.524	4.100	18.237	0.150	3.81	0.029	0.74	4.00	SST	C	N
0.219	5.563	G-12	0.41	10.414	0.157	3.988	50.00	8.750	0.150	3.810	7.400	32.915	0.190	4.83	0.031	0.79	6.00	MW	CG	Z
0.219	5.563	QQ-14	0.41	10.414	0.143	3.632	126.00	22.050	0.070	1.778	9.200	40.922	0.270	6.86	0.038	0.97	6.00	SPR	C	Z
0.219	5.563	J-73	0.41	10.414	0.137	3.480	114.00	19.950	0.090	2.286	11.000	48.928	0.310	7.87	0.041	1.04	7.50	SST	CG	N
0.219	5.563	12754	0.42	10.668	0.171	4.343	9.20	1.610	0.180	4.572	1.700	7.562	0.240	6.10	0.024	0.61	9.00	MW	C	N
0.219	5.563	PP-90	0.44	11.176	0.199	5.055	0.39	0.068	0.370	9.398	0.140	0.623	0.070	1.78	0.010	0.25	6.00	MW	C	N
0.219	5.563	A13-54	0.44	11.176	0.191	4.851	1.10	0.193	0.310	7.874	0.330	1.468	0.130	3.30	0.014	0.36	8.00	MW	C	N
0.219	5.563	U-98	0.44	11.176	0.183	4.648	2.40	0.420	0.280	7.112	0.650	2.891	0.160	4.06	0.018	0.46	9.00	SST	CG	N
0.219	5.563	2626	0.44	11.176	0.181	4.597	7.80	1.365	0.240	6.096	1.900	8.451	0.110	2.79	0.019	0.48	5.00	MW	C	Z
0.219	5.563	B9-33	0.44	11.176	0.181	4.597	3.90	0.683	0.270	6.858	1.000	4.448	0.170	4.06	0.027	0.69	8.00	MW	C	N
0.219	5.563	B-16	0.44	11.176	0.175	4.445	7.00	1.225	0.270	6.858	1.900	8.451	0.170	4.32	0.022	0.56	7.50	SST	CG	N
0.219	5.563	3992	0.44	11.176	0.169	4.293	9.60	1.680	0.160	4.064	1.600	7.117	0.280	7.11	0.025	0.64	10.00	MW	C	Z
0.219	5.563	H-71	0.44	11.176	0.141	3.581	107.00	18.725	0.090	2.286	9.900	44.035	0.290	7.37	0.039	0.99	7.33	SPR	CG	N
0.219	5.563	HH-46	0.44	11.176	0.139	3.531	112.00	19.600	0.090	2.286	9.900	44.035	0.280	7.11	0.040	1.02	7.00	SST	CG	N
0.219	5.563	L-29	0.44	11.176	0.139	3.531	214.00	37.450	0.050	1.270	11.000	48.928	0.200	5.08	0.040	1.02	5.00	SPR	CG	Z
0.219	5.563	XX-21	0.47	11.938	0.145	3.683	78.00	13.650	0.100	2.540	8.000	35.584	0.300	7.62	0.037	0.94	7.00	SST	C	N
0.219	5.563	2703	0.47	11.938	0.143	3.632	126.00	22.050	0.100	2.540	13.000	57.824	0.270	6.86	0.038	0.97	6.00	MW	C	Z
0.219	5.563	A11-20	0.47	11.938	0.133	3.378	200.00	35.000	0.060	1.524	12.000	53.376	0.300	7.62	0.043	1.09	6.00	SST	C	N
0.219	5.563	EE-86	0.50	12.700	0.191	4.851	0.46	0.081	0.290	7.366	0.130	0.578	0.210	5.33	0.014	0.36	14.00	SST	C	N
0.219	5.563	B-66	0.50	12.700	0.187	4.750	1.70	0.298	0.350	8.890	0.600	2.669	0.150	3.81	0.016	0.41	8.50	MW</		




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h								
0.219	5.563	00-27	0.59	14.986	0.159	4.039	19.00	3.325	0.240	6.096	4.500	20.016	0.330	8.38	0.030	0.76	10.00	SST	C	N
0.219	5.563	A9-34	0.59	14.986	0.147	3.734	56.00	9.800	0.140	3.556	7.900	35.139	0.320	8.13	0.036	0.91	9.00	SPR	CG	N
0.219	5.563	H-5	0.63	16.002	0.189	4.801	0.66	0.116	0.400	10.160	0.260	1.156	0.230	5.84	0.015	0.38	15.00	MW	CG	Z
0.219	5.563	M-21	0.63	16.002	0.179	4.547	4.20	0.735	0.430	10.922	1.800	8.006	0.200	5.08	0.020	0.51	9.00	MW	C	Z
0.219	5.563	Q-70	0.63	16.002	0.175	4.445	4.80	0.840	0.380	9.652	1.800	8.006	0.240	6.10	0.022	0.56	10.00	SST	C	N
0.219	5.563	S-714	0.63	16.002	0.175	4.445	6.10	1.068	0.310	7.874	1.900	8.451	0.200	5.08	0.022	0.56	8.25	SST	C	N
0.219	5.563	2667	0.63	16.002	0.171	4.343	8.30	1.453	0.370	9.398	3.000	13.344	0.260	6.60	0.024	0.61	9.75	MW	C	Z
0.219	5.563	B14-1	0.63	16.002	0.171	4.343	13.00	2.275	0.290	7.366	3.700	16.458	0.190	4.83	0.024	0.61	7.00	MW	C	N
0.219	5.563	3790	0.63	16.002	0.169	4.293	7.70	1.348	0.300	7.620	2.300	10.230	0.330	8.38	0.025	0.64	12.00	MW	C	Z
0.219	5.563	I-69	0.63	16.002	0.169	4.293	9.60	1.680	0.380	9.652	3.600	16.013	0.250	6.35	0.025	0.64	10.00	MW	CG	Z
0.219	5.563	EE-20	0.63	16.002	0.159	4.039	15.00	2.625	0.270	6.858	4.100	18.237	0.360	9.14	0.030	0.76	12.00	SST	CG	N
0.219	5.563	MM-19	0.63	16.002	0.159	4.039	22.00	3.850	0.310	7.874	6.700	29.802	0.300	7.62	0.030	0.76	10.00	MW	CG	Z
0.219	5.563	S-5	0.63	16.002	0.155	3.937	21.00	3.675	0.230	5.842	4.700	20.906	0.400	10.16	0.032	0.81	11.50	SST	C	N
0.219	5.563	GG-68	0.63	16.002	0.149	3.785	38.00	6.650	0.180	4.572	6.800	30.246	0.350	8.89	0.035	0.89	10.00	SST	CG	N
0.219	5.563	AA-89	0.66	16.764	0.195	4.953	0.27	0.047	0.490	12.446	0.130	0.578	0.170	4.32	0.012	0.30	13.00	SST	C	N
0.219	5.563	B5-68	0.66	16.764	0.169	4.293	14.00	2.450	0.190	4.826	2.700	12.010	0.200	5.08	0.025	0.64	7.00	SST	CG	N
0.219	5.563	2912	0.66	16.764	0.167	4.242	12.00	2.100	0.380	9.652	4.400	19.571	0.260	6.60	0.026	0.66	9.88	MW	CG	Z
0.219	5.563	2882	0.66	16.764	0.159	4.039	27.00	4.725	0.250	6.350	6.700	29.802	0.290	7.37	0.030	0.76	8.50	MW	C	N
0.219	5.563	S-946	0.66	16.764	0.157	3.988	27.00	4.725	0.190	4.826	5.000	22.240	0.290	7.37	0.031	0.79	8.50	SST	C	N
0.219	5.563	A-93	0.66	16.764	0.149	3.785	33.00	5.775	0.220	5.588	7.200	32.026	0.440	11.18	0.035	0.89	12.50	SPR	CG	N
0.219	5.563	NN-69	0.69	17.526	0.193	4.902	0.37	0.065	0.510	12.954	0.190	0.845	0.180	4.57	0.013	0.33	13.00	SST	CG	N
0.219	5.563	I-78	0.69	17.526	0.191	4.851	0.24	0.042	0.320	8.128	0.080	0.356	0.360	9.14	0.014	0.36	25.00	SST	C	N
0.219	5.563	BB-46	0.69	17.526	0.189	4.801	1.20	0.210	0.540	13.716	0.660	2.936	0.150	3.81	0.015	0.38	9.00	MW	C	GI
0.219	5.563	EE-46	0.69	17.526	0.187	4.750	1.10	0.193	0.500	12.700	0.540	2.402	0.190	4.83	0.016	0.41	11.00	SST	C	N
0.219	5.563	LL-86	0.69	17.526	0.183	4.648	1.30	0.228	0.420	10.668	0.560	2.491	0.270	6.86	0.018	0.46	14.00	SST	CG	N
0.219	5.563	B8-13	0.69	17.526	0.147	3.734	36.00	6.300	0.220	5.588	7.800	34.694	0.470	11.94	0.036	0.91	13.00	SPR	CG	N
0.219	5.563	J-18	0.69	17.526	0.139	3.531	71.00	12.425	0.150	3.810	11.000	48.928	0.440	11.18	0.040	1.02	11.00	SPR	CG	GI
0.219	5.563	11363	0.69	17.526	0.125	3.175	153.00	26.775	0.100	2.540	16.000	71.168	0.470	11.94	0.047	1.19	10.00	SST	CG	N
0.219	5.563	NN-31	0.69	17.526	0.125	3.175	230.00	40.250	0.070	1.778	17.000	75.616	0.420	10.67	0.047	1.19	8.00	SPR	C	N
0.219	5.563	B8-12	0.75	19.050	0.195	4.953	0.15	0.026	0.440	11.176	0.060	0.267	0.310	7.87	0.012	0.30	25.00	MW	C	N
0.219	5.563	XX-59	0.75	19.050	0.189	4.801	0.71	0.124	0.530	13.462	0.380	1.690	0.230	5.84	0.015	0.38	14.00	MW	C	Z
0.219	5.563	LL-30	0.75	19.050	0.185	4.699	0.75	0.131	0.410	10.414	0.310	1.379	0.340	8.64	0.017	0.43	19.00	SST	C	N
0.219	5.563	G-37	0.75	19.050	0.179	4.547	4.90	0.858	0.450	11.430	2.200	9.786	0.180	4.57	0.020	0.51	8.00	MW	C	N
0.219	5.563	1900	0.75	19.050	0.175	4.445	5.50	0.963	0.510	12.954	2.800	12.454	0.240	6.10	0.022	0.56	10.00	MW	CG	Z
0.219	5.563	S-715	0.75	19.050	0.175	4.445	5.10	0.893	0.380	9.652	1.900	8.451	0.230	5.84	0.022	0.56	9.50	SST	C	N
0.219	5.563	3544	0.75	19.050	0.173	4.394	6.70	1.173	0.490	12.446	3.300	14.678	0.230	5.84	0.023	0.58	10.00	MW	CG	Z
0.219	5.563	3709	0.75	19.050	0.169	4.293	9.00	1.575	0.440	11.176	4.000	17.792	0.290	7.37	0.025	0.64	10.50	MW	C	Z
0.219	5.563	V-10	0.75	19.050	0.167	4.242	7.90	1.383	0.370	9.398	3.000	13.344	0.340	8.64	0.026	0.66	12.00	SST	C	N
0.219	5.563	HH-43	0.75	19.050	0.159	4.039	19.00	3.325	0.350	8.890	6.700	29.802	0.330	8.38	0.030	0.76	11.00	MW	CG	N
0.219	5.563	TT-39	0.75	19.050	0.159	4.039	18.00	3.150	0.260	6.604	4.500	20.016	0.350	8.89	0.030	0.76	10.50	SST	C	N
0.219	5.563	11303	0.75	19.050	0.149	3.785	35.00	6.125	0.190	4.826	6.800	30.246	0.410	10.41	0.035	0.89	10.80	SST	C	N
0.219	5.563	A9-5	0.78	19.812	0.155	3.937	23.00	4.025	0.350	8.890	8.100	36.029	0.380	9.65	0.032	0.81	12.00	MW	CG	N
0.219	5.563	S-874	0.78	19.812	0.143	3.632	49.00	8.575	0.180	4.572	8.600	38.253	0.420	10.67	0.038	0.97	11.00	SST	CG	N
0.219	5.563	V-61	0.81	20.574	0.179	4.547	2.80	0.490	0.510	12.954	1.400	6.227	0.240	6.10	0.020	0.51	11.00	SST	C	N
0.219	5.563	MM-81	0.81	20.574	0.155	3.937	16.00	2.800	0.300	7.620	4.900	21.795	0.510	12.95	0.032	0.81	16.00	HD	CG	Z
0.219	5.563	Z-85	0.81	20.574	0.151	3.835	23.00	4.025	0.300	7.620	7.000	31.136	0.510	12.95	0.034	0.86	15.00	SPR	CG	N
0.219	5.563	1503	0.81	20.574	0.149	3.785	51.00	8.925	0.200	5.080	10.000	44.480	0.340	8.64	0.035	0.89	8.75	MW	C	Z
0.219	5.563	S-1555	0.81	20.574	0.143	3.632	49.00	8.575	0.180	4.572	8.600	38.253	0.460	11.68	0.038	0.97	11.00	SST	CG	N
0.219	5.563	VW-38	0.81	20.574	0.129	3.277	118.00	20.650	0.130	3.302	15.000	66.720	0.560	14.22	0.045	1.14	11.50	SPR	C	Z
0.219	5.563	H-48	0.84	21.336	0.165	4.191	15.00	2.625	0.320	8.128	5.000	22.240	0.240	6.10	0.027	0.69	9.00	MW	CG	Z
0.219	5.563	II-58	0.84	21.336	0.153	3.886	20.00	3.500	0.310	7.874	6.400	28.467	0.500	12.70	0.033	0.84	15.00	SPR	CG	Z
0.219	5.563	10733	0.88	22.352	0.193	4.902	0.64	0.112	0.670	17.018	0.430	1.913	0.120	3.05	0.013	0.33	8.50	SST	C	N
0.219	5.563	B-15	0.88	22.352	0.185	4.699	0.79	0.138	0.550	13.970	0.440	1.957	0.320	8.13	0.017	0.43	18.00	SST	C	N
0.219	5.563	DD-38	0.88	22.352	0.179	4.547	2.60	0.455	0.560	14.224	1.400	6.227	0.260	6.60</						




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh								
0.219	5.563	A10-32	1.00	25.400	0.149	3.785	27.00	4.725	0.270	6.858	7.200	32.026	0.530	13.46	0.035	0.89	15.00	SPR	CG	N
0.219	5.563	Z-89	1.06	26.924	0.183	4.648	0.48	0.084	0.400	10.160	0.190	0.845	0.670	17.02	0.018	0.46	36.00	SST	C	N
0.219	5.563	J-2	1.06	26.924	0.165	4.191	9.80	1.715	0.510	12.954	5.000	22.240	0.350	8.89	0.027	0.69	13.00	MW	CG	GI
0.219	5.563	KK-94	1.06	26.924	0.151	3.835	22.00	3.850	0.320	8.128	7.000	31.136	0.580	14.73	0.034	0.86	16.00	SPR	C	N
0.219	5.563	B15-13	1.09	27.686	0.141	3.581	36.00	6.300	0.280	7.112	9.900	44.035	0.700	17.78	0.039	0.99	18.00	SPR	CG	N
0.219	5.563	S-1054	1.13	28.702	0.163	4.140	10.00	1.750	0.370	9.398	3.700	16.458	0.390	9.91	0.028	0.71	13.00	SST	C	N
0.219	5.563	Z-40	1.16	29.464	0.159	4.039	17.00	2.975	0.390	9.906	6.700	29.802	0.360	9.14	0.030	0.76	12.00	MW	CG	N
0.219	5.563	2618	1.16	29.464	0.147	3.734	26.00	4.550	0.410	10.414	11.000	48.928	0.650	16.51	0.036	0.91	17.00	MW	C	Z
0.219	5.563	10574	1.19	30.226	0.171	4.343	4.00	0.700	0.760	19.304	3.000	13.344	0.430	10.92	0.024	0.61	18.00	MW	CG	N
0.219	5.563	10065	1.25	31.750	0.183	4.648	1.70	0.298	0.940	23.876	1.600	7.117	0.250	6.35	0.018	0.46	13.00	MW	C	Z
0.219	5.563	11399	1.25	31.750	0.179	4.547	2.50	0.438	0.860	21.844	2.200	9.786	0.290	7.37	0.020	0.51	13.50	MW	C	Z
0.219	5.563	2861	1.25	31.750	0.171	4.343	3.10	0.543	0.670	17.018	2.100	9.341	0.580	14.73	0.024	0.61	23.00	MW	C	GI
0.219	5.563	S-145	1.25	31.750	0.171	4.343	3.60	0.630	0.690	17.526	2.500	11.120	0.440	11.18	0.024	0.61	17.50	SST	C	N
0.219	5.563	3779	1.25	31.750	0.163	4.140	10.00	1.750	0.540	13.716	5.500	24.464	0.430	10.92	0.028	0.71	14.50	MW	C	Z
0.219	5.563	U-20	1.25	31.750	0.141	3.581	38.00	6.650	0.260	6.604	9.900	44.035	0.700	17.78	0.039	0.99	17.00	SPR	C	N
0.219	5.563	A10-48	1.28	32.512	0.181	4.597	1.00	0.175	0.840	21.336	0.860	3.825	0.440	11.18	0.019	0.48	22.30	SST	C	N
0.219	5.563	FF-91	1.31	33.274	0.175	4.445	3.20	0.560	0.600	15.240	1.900	8.451	0.330	8.38	0.022	0.56	14.00	SST	C	N
0.219	5.563	0-84	1.31	33.274	0.163	4.140	9.90	1.733	0.550	13.970	5.500	24.464	0.440	11.18	0.028	0.71	14.80	MW	C	Z
0.219	5.563	S-891	1.38	35.052	0.191	4.851	0.43	0.075	1.200	30.480	0.490	2.180	0.220	5.59	0.014	0.36	15.00	SST	C	N
0.219	5.563	159-B	1.38	35.052	0.187	4.750	1.20	0.210	0.970	24.638	1.100	4.893	0.200	5.08	0.016	0.41	11.80	MW	C	Z
0.219	5.563	160-B	1.38	35.052	0.183	4.648	1.70	0.298	0.920	23.368	1.600	7.117	0.250	6.35	0.018	0.46	12.80	MW	C	Z
0.219	5.563	1699	1.38	35.052	0.179	4.547	1.50	0.263	0.940	23.876	1.400	6.227	0.440	11.18	0.020	0.51	21.00	MW	C	Z
0.219	5.563	351-B	1.38	35.052	0.179	4.547	2.40	0.420	0.910	23.114	2.200	9.786	0.310	7.87	0.020	0.51	14.30	MW	C	Z
0.219	5.563	3865	1.38	35.052	0.173	4.394	3.10	0.543	0.910	23.114	2.800	12.454	0.470	11.94	0.023	0.58	19.30	MW	C	Z
0.219	5.563	161-B	1.38	35.052	0.173	4.394	3.90	0.683	0.850	21.590	3.300	14.678	0.390	9.91	0.023	0.58	15.80	MW	C	Z
0.219	5.563	M-147	1.38	35.052	0.173	4.394	4.90	0.858	0.450	11.430	2.200	9.786	0.290	7.37	0.023	0.58	11.50	SST	C	N
0.219	5.563	162-B	1.38	35.052	0.163	4.140	8.10	1.418	0.680	17.272	5.500	24.464	0.530	13.46	0.028	0.71	17.80	MW	C	Z
0.219	5.563	G-89	1.41	35.814	0.161	4.089	6.80	1.190	0.600	15.240	4.100	18.237	0.640	16.26	0.029	0.74	21.00	SST	C	N
0.219	5.563	10898	1.50	38.100	0.195	4.953	0.29	0.051	1.300	33.020	0.380	1.690	0.180	4.57	0.012	0.30	13.80	MW	C	N
0.219	5.563	11463	1.50	38.100	0.183	4.648	1.70	0.298	0.940	23.876	1.600	7.117	0.250	6.35	0.018	0.46	13.00	MW	C	Z
0.219	5.563	S-260	1.50	38.100	0.171	4.343	3.50	0.613	0.710	18.034	2.500	11.120	0.460	11.68	0.024	0.61	18.00	SST	C	N
0.219	5.563	2515	1.50	38.100	0.169	4.293	4.80	0.840	0.820	20.828	4.000	17.792	0.480	12.19	0.025	0.64	18.00	MW	C	Z
0.219	5.563	I-25	1.50	38.100	0.169	4.293	3.80	0.665	0.930	23.622	3.600	16.013	0.580	14.73	0.025	0.64	22.00	MW	C	Z
0.219	5.563	AA-97	1.50	38.100	0.159	4.039	8.60	1.505	0.780	19.812	6.700	29.802	0.690	17.53	0.030	0.76	22.00	MW	C	Z
0.219	5.563	KK-50	1.53	38.862	0.199	5.055	0.07	0.012	1.300	33.020	0.090	0.400	0.240	6.10	0.010	0.25	23.00	SST	C	N
0.219	5.563	S-159	1.56	39.624	0.175	4.445	2.40	0.420	0.800	20.320	1.900	8.451	0.420	10.67	0.022	0.56	18.00	SST	C	N
0.219	5.563	GG-63	1.63	41.402	0.179	4.547	1.90	0.333	1.100	27.940	2.200	9.786	0.360	9.14	0.020	0.51	17.00	MW	C	Z
0.219	5.563	10664	1.72	43.688	0.183	4.648	1.00	0.175	1.300	33.020	1.400	6.227	0.380	9.65	0.018	0.46	20.00	MW	C	BO
0.219	5.563	10288	1.75	44.450	0.189	4.801	0.57	0.100	1.500	38.100	0.850	3.781	0.270	6.86	0.015	0.38	17.00	MW	C	GI
0.219	5.563	159-C	1.75	44.450	0.187	4.750	0.90	0.158	1.200	30.480	1.100	4.893	0.250	6.35	0.016	0.41	14.50	MW	C	Z
0.219	5.563	160-C	1.75	44.450	0.183	4.648	1.30	0.228	1.200	30.480	1.600	7.117	0.310	7.87	0.018	0.46	16.00	MW	C	Z
0.219	5.563	351-C	1.75	44.450	0.179	4.547	1.90	0.333	1.200	30.480	2.200	9.786	0.380	9.65	0.020	0.51	17.80	MW	C	Z
0.219	5.563	161-C	1.75	44.450	0.173	4.394	3.00	0.525	1.100	27.940	3.300	14.678	0.480	12.19	0.023	0.58	19.80	MW	C	Z
0.219	5.563	162-C	1.75	44.450	0.163	4.140	6.20	1.085	0.890	22.606	5.500	24.464	0.660	16.76	0.028	0.71	22.50	MW	C	Z
0.219	5.563	MM-2	1.88	47.752	0.171	4.343	4.60	0.805	0.810	20.574	3.700	16.458	0.380	9.65	0.024	0.61	16.00	MW	C	Z
0.219	5.563	FF-46	1.94	49.276	0.159	4.039	4.70	0.823	0.870	22.098	4.100	18.237	1.070	27.18	0.030	0.76	34.50	SST	C	N
0.219	5.563	10267	2.19	55.626	0.163	4.140	3.40	0.595	1.100	27.940	3.600	16.013	1.130	28.70	0.028	0.71	39.50	MW	C	GI
0.219	5.563	10436	2.28	57.912	0.143	3.632	16.00	2.800	0.580	14.732	9.200	40.922	1.330	33.78	0.038	0.97	34.00	SPR	C	GI
0.219	5.563	10640	2.44	61.976	0.133	3.378	38.00	6.650	0.350	3.890	13.000	57.824	1.160	29.46	0.043	1.09	26.00	SPR	C	Z
0.219	5.563	G-30	5.00	127.000	0.181	4.597	0.33	0.058	3.600	91.440	1.200	5.338	1.430	36.32	0.019	0.48	74.00	MW	C	GI
0.234	5.944	CC-15	0.16	4.064	0.198	5.029	5.40	0.945	0.050	1.270	0.290	1.290	0.100	2.54	0.018	0.46	4.75	MW	C	N
0.234	5.944	G-8	0.16	4.064	0.190	4.826	21.00	3.68	0.060	1.524	1.200	5.338	0.100	2.54	0.022	0.56	3.50	SST	C	N
0.234	5.944	Z-14	0.16	4.064	0.164	4.166	238.00	41.650	0.030	0.762	6.400	28.467	0.110	2.79	0.035	0.89	3.00	SST	CG	N
0.234	5.944	V-8	0.25	6.350	0.194	4.928	10.00	1.750	0.130	3.302	1.400									




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.234	5.944	B3-64	0.42	10.668	0.170	4.318	37.00	6.475	0.170	4.318	6.100	27.133	0.260	6.60	0.032	0.81	7.00	MW	C	GI
0.234	5.944	A12-36	0.42	10.668	0.164	4.166	48.00	8.400	0.130	3.302	6.400	28.467	0.280	7.11	0.035	0.89	7.00	SST	C	N
0.234	5.944	S-813	0.44	11.176	0.202	5.131	1.30	0.228	0.290	7.366	0.390	1.735	0.140	3.56	0.016	0.41	8.00	SST	C	N
0.234	5.944	3564	0.44	11.176	0.186	4.724	13.00	2.275	0.270	6.858	3.500	15.568	0.170	4.32	0.024	0.61	6.00	MW	C	Z
0.234	5.944	VV-57	0.44	11.176	0.184	4.674	15.00	2.625	0.240	6.096	3.700	16.458	0.180	4.57	0.025	0.64	6.00	MW	C	Z
0.234	5.944	B1-3	0.44	11.176	0.182	4.623	18.00	3.150	0.150	3.810	2.800	12.454	0.140	3.56	0.026	0.66	5.50	SST	CG	N
0.234	5.944	B14-44	0.44	11.176	0.174	4.420	23.00	4.025	0.170	4.318	3.800	16.902	0.270	6.86	0.030	0.76	8.00	MW	C	N
0.234	5.944	U-41	0.44	11.176	0.174	4.420	61.00	10.675	0.070	1.778	4.300	19.126	0.150	3.81	0.030	0.76	4.00	SST	C	N
0.234	5.944	B9-35	0.44	11.176	0.156	3.962	128.00	22.400	0.070	1.778	9.300	41.366	0.210	5.33	0.039	0.99	5.50	SPR	CG	N
0.234	5.944	B7-21	0.44	11.176	0.154	3.912	144.00	25.200	0.070	1.778	10.000	44.480	0.220	5.59	0.040	1.02	5.50	SPR	CG	N
0.234	5.944	Z-97	0.44	11.176	0.154	3.912	92.00	16.100	0.100	2.540	9.400	41.811	0.270	6.86	0.040	1.02	6.75	SST	CG	N
0.234	5.944	3891	0.44	11.176	0.144	3.658	175.00	30.625	0.080	2.032	14.000	62.272	0.320	8.13	0.045	1.14	7.00	SPR	CG	Z
0.234	5.944	CC-45	0.44	11.176	0.134	3.404	251.00	43.925	0.050	1.270	13.000	57.824	0.390	9.91	0.050	1.27	7.75	SPR	CG	N
0.234	5.944	3991	0.44	11.176	0.132	3.353	577.00	100.975	0.030	0.762	19.000	84.512	0.290	7.37	0.051	1.30	4.75	SPR	C	Z
0.234	5.944	B2-1	0.45	11.430	0.172	4.369	45.00	7.875	0.150	3.810	7.000	31.136	0.200	5.08	0.031	0.79	5.50	MW	C	N
0.234	5.944	12763	0.45	11.430	0.170	4.318	46.00	8.050	0.170	4.318	7.700	34.250	0.220	5.59	0.032	0.81	6.00	MW	C	Z
0.234	5.944	A12-29	0.47	11.938	0.210	5.334	0.45	0.079	0.360	9.144	0.160	0.712	0.110	2.79	0.012	0.30	8.00	MW	C	Z
0.234	5.944	B12-13	0.47	11.938	0.190	4.826	9.40	1.645	0.290	7.366	2.700	12.010	0.130	3.30	0.022	0.56	5.75	MW	CG	Z
0.234	5.944	A12-24	0.47	11.938	0.174	4.420	37.00	6.475	0.170	4.318	6.300	28.022	0.200	5.08	0.030	0.76	5.75	MW	C	N
0.234	5.944	12585	0.47	11.938	0.172	4.369	40.00	7.000	0.180	4.572	7.000	31.136	0.220	5.59	0.031	0.79	6.00	MW	C	N
0.234	5.944	12491	0.47	11.938	0.170	4.318	49.00	8.575	0.110	2.794	5.500	24.464	0.220	5.59	0.032	0.81	5.75	SPR	CG	N
0.234	5.944	B4-2	0.50	12.700	0.220	5.588	0.03	0.005	0.410	10.414	0.010	0.044	0.090	2.29	0.007	0.18	12.00	MW	C	N
0.234	5.944	NN-10	0.50	12.700	0.194	4.928	7.80	1.365	0.260	6.604	2.000	8.896	0.100	2.54	0.020	0.51	5.00	MW	CG	N
0.234	5.944	WW-48	0.50	12.700	0.192	4.877	6.30	1.103	0.250	6.350	1.600	7.117	0.150	3.81	0.021	0.53	6.00	SST	C	N
0.234	5.944	A13-18	0.50	12.700	0.190	4.826	7.80	1.365	0.230	5.842	1.800	8.006	0.130	3.30	0.022	0.56	6.00	SST	CG	N
0.234	5.944	PP-74	0.50	12.700	0.190	4.826	8.80	1.540	0.310	7.874	2.700	12.010	0.130	3.30	0.022	0.56	6.00	MW	C	N
0.234	5.944	Z-93	0.50	12.700	0.184	4.674	8.80	1.540	0.280	7.112	2.400	10.675	0.230	5.84	0.025	0.64	9.00	MW	CG	GI
0.234	5.944	JJ-3	0.50	12.700	0.182	4.623	7.90	1.383	0.240	6.096	1.900	8.451	0.260	6.60	0.026	0.66	10.00	SST	CG	N
0.234	5.944	JJ-94	0.50	12.700	0.182	4.623	8.10	1.418	0.210	5.334	1.700	7.562	0.290	7.37	0.026	0.66	10.00	SST	C	N
0.234	5.944	MM-73	0.50	12.700	0.182	4.623	12.00	2.100	0.240	6.096	2.800	12.454	0.200	5.08	0.026	0.66	7.50	SST	C	N
0.234	5.944	A13-28	0.50	12.700	0.180	4.572	19.00	3.325	0.160	4.064	3.100	13.789	0.160	4.06	0.027	0.69	6.00	SST	CG	N
0.234	5.944	B17-127	0.50	12.700	0.178	4.521	19.00	3.325	0.270	6.858	5.200	23.130	0.210	5.33	0.028	0.71	7.33	MW	CG	Z
0.234	5.944	K-9	0.50	12.700	0.176	4.470	20.00	3.500	0.270	6.858	5.300	23.574	0.230	5.84	0.029	0.74	8.00	MW	CG	N
0.234	5.944	JJ-58	0.50	12.700	0.174	4.420	22.00	3.850	0.200	5.080	4.300	19.126	0.260	6.60	0.030	0.76	7.50	SST	C	N
0.234	5.944	II-18	0.50	12.700	0.170	4.318	32.00	5.600	0.220	5.588	7.000	31.136	0.280	7.11	0.032	0.81	7.75	MW	C	N
0.234	5.944	S-1692	0.50	12.700	0.170	4.318	32.00	5.600	0.160	4.064	5.100	22.685	0.260	6.60	0.032	0.81	7.00	SST	C	N
0.234	5.944	S-3003	0.50	12.700	0.168	4.267	46.00	8.050	0.120	3.048	5.600	24.909	0.230	5.84	0.033	0.84	6.00	SST	C	N
0.234	5.944	A12-42	0.50	12.700	0.156	3.962	80.00	14.000	0.110	2.794	8.700	38.698	0.270	6.86	0.039	0.99	7.00	SST	CG	N
0.234	5.944	B-28	0.50	12.700	0.152	3.861	141.00	24.675	0.080	2.032	11.000	48.928	0.250	6.35	0.041	1.04	6.00	SPR	CG	GI
0.234	5.944	3518	0.50	12.700	0.150	3.810	253.00	44.275	0.050	1.270	12.000	53.376	0.190	4.83	0.042	1.07	4.50	SPR	CG	N
0.234	5.944	A13-13	0.50	12.700	0.150	3.810	112.00	19.600	0.100	2.540	11.000	48.928	0.290	7.37	0.042	1.07	7.00	SST	CG	N
0.234	5.944	Y-98	0.50	12.700	0.144	3.658	175.00	30.625	0.080	2.032	14.000	62.272	0.320	8.13	0.045	1.14	7.00	SPR	CG	Z
0.234	5.944	1505	0.50	12.700	0.140	3.556	268.00	46.900	0.060	1.524	16.000	71.168	0.280	7.11	0.047	1.19	6.00	HD	CG	Z
0.234	5.944	2963	0.53	13.462	0.212	5.385	0.63	0.110	0.470	11.938	0.290	1.290	0.070	1.78	0.011	0.28	5.00	MW	C	GI
0.234	5.944	FF-71	0.53	13.462	0.206	5.232	0.77	0.135	0.410	10.414	0.310	1.379	0.130	3.30	0.014	0.36	8.00	SST	C	N
0.234	5.944	A10-8	0.53	13.462	0.196	4.978	3.40	0.595	0.370	9.398	1.300	5.782	0.160	4.06	0.019	0.48	7.50	MW	C	N
0.234	5.944	S-1461	0.53	13.462	0.192	4.877	2.60	0.455	0.290	7.366	0.770	3.425	0.240	6.10	0.021	0.53	11.50	SST	CG	N
0.234	5.944	11216	0.53	13.462	0.190	4.826	7.80	1.365	0.230	5.842	1.800	8.006	0.130	3.30	0.022	0.56	6.00	SST	CG	Z
0.234	5.944	3529	0.53	13.462	0.164	4.166	68.00	11.900	0.140	3.556	9.500	42.256	0.210	5.33	0.035	0.89	6.00	MW	CG	Z
0.234	5.944	M-102	0.53	13.462	0.160	4.064	45.00	7.875	0.170	4.318	7.500	33.360	0.330	8.38	0.037	0.94	9.00	SST	CG	N
0.234	5.944	HH-47	0.56	14.224	0.202	5.131	0.61	0.107	0.310	7.874	0.190	0.845	0.260	6.60	0.016	0.41	15.00	SST	C	N
0.234	5.944	10930	0.56	14.224	0.198	5.029	2.20	0.385	0.400	10.160	0.890	3.959	0.160	4.06	0.018	0.46	8.00	SST	C	N
0.234	5.944	LL-98	0.56	14.224	0.192	4.877	8.40	1.470	0.190	4.826	1.600	7.117	0.130	3.30	0.021	0.53	5.00	SST	C	N
0.234	5.944	A-85	0.56	14.224	0.188	4.775	7.10	1.243	0.380	9.652	2.700	12.010	0.180	4.						




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh								
0.234	5.944	I-92	0.66	16.764	0.174	4.420	20.00	3.500	0.320	8.128	6.300	28.022	0.270	6.86	0.030	0.76	9.00	MW	CG	N
0.234	5.944	10011	0.69	17.526	0.200	5.080	1.70	0.298	0.520	13.208	0.870	3.870	0.170	4.32	0.017	0.43	9.00	MW	C	Z
0.234	5.944	W-2	0.69	17.526	0.194	4.928	1.70	0.298	0.390	9.906	0.660	2.936	0.300	7.62	0.020	0.51	14.00	SST	C	Z
0.234	5.944	YY-63	0.69	17.526	0.188	4.775	4.30	0.753	0.390	9.906	1.700	7.562	0.300	7.62	0.023	0.58	12.00	MW	C	Z
0.234	5.944	II-87	0.69	17.526	0.186	4.724	4.30	0.753	0.360	9.144	1.500	6.672	0.320	8.13	0.024	0.61	12.50	SST	C	N
0.234	5.944	B-65	0.69	17.526	0.182	4.623	11.00	1.925	0.260	6.604	2.800	12.454	0.230	5.84	0.026	0.66	8.00	SST	C	N
0.234	5.944	A-14-14	0.69	17.526	0.180	4.572	14.00	2.450	0.320	8.128	4.700	20.906	0.220	5.59	0.027	0.69	8.00	MW	CG	GI
0.234	5.944	S-3144	0.69	17.526	0.174	4.420	18.00	3.150	0.230	5.842	4.300	19.126	0.260	6.60	0.030	0.76	8.50	SST	CG	N
0.234	5.944	B2-24	0.69	17.526	0.158	4.013	50.00	8.750	0.240	6.096	12.000	53.376	0.420	10.67	0.038	0.97	10.00	MW	C	N
0.234	5.944	3632	0.69	17.526	0.154	3.912	63.00	11.025	0.160	4.064	10.000	44.480	0.440	11.18	0.040	1.02	10.00	SPR	C	Z
0.234	5.944	A14-53	0.69	17.526	0.150	3.810	77.00	13.475	0.140	3.556	11.000	48.928	0.390	9.91	0.042	1.07	9.25	SST	CG	N
0.234	5.944	Y-93	0.69	17.526	0.146	3.708	112.00	19.600	0.120	3.048	13.000	57.824	0.400	10.16	0.044	1.12	9.00	SPR	CG	Z
0.234	5.944	DD-75	0.69	17.526	0.134	3.404	288.00	50.400	0.080	2.032	24.000	106.752	0.350	8.89	0.050	1.27	7.00	MW	CG	N
0.234	5.944	11163	0.72	18.288	0.214	5.436	0.20	0.035	0.620	15.748	0.120	0.534	0.100	2.54	0.010	0.25	8.50	MW	C	Z
0.234	5.944	B11-31	0.72	18.288	0.182	4.623	13.00	2.275	0.330	8.382	4.200	18.682	0.230	5.84	0.026	0.66	7.75	MW	C	Z
0.234	5.944	NN-90	0.72	18.288	0.168	4.267	20.00	3.500	0.300	7.620	6.000	26.688	0.410	10.41	0.033	0.84	12.50	SPR	CG	N
0.234	5.944	RR-22	0.72	18.288	0.168	4.267	21.00	3.675	0.270	6.858	5.600	24.909	0.400	10.16	0.033	0.84	11.00	SST	C	N
0.234	5.944	HH-90	0.75	19.050	0.204	5.182	0.46	0.081	0.480	12.192	0.220	0.979	0.270	6.86	0.015	0.38	17.00	MW	C	N
0.234	5.944	S-936	0.75	19.050	0.202	5.131	0.99	0.173	0.570	14.478	0.570	2.535	0.180	4.57	0.016	0.41	10.00	SST	C	N
0.234	5.944	A-57	0.75	19.050	0.198	5.029	1.90	0.333	0.550	13.970	1.000	4.448	0.200	5.08	0.018	0.46	10.00	MW	C	Z
0.234	5.944	O-40	0.75	19.050	0.192	4.877	2.50	0.438	0.440	11.176	1.100	4.893	0.310	7.87	0.021	0.53	13.60	MW	C	Z
0.234	5.944	A14-19	0.75	19.050	0.190	4.826	4.90	0.858	0.360	9.144	1.800	8.006	0.180	4.57	0.022	0.56	8.33	SST	CG	N
0.234	5.944	L-98	0.75	19.050	0.190	4.826	3.50	0.613	0.460	11.684	1.600	7.117	0.290	7.37	0.022	0.56	12.00	MW	C	BO
0.234	5.944	A13-5	0.75	19.050	0.188	4.775	6.30	1.103	0.320	8.128	2.100	9.341	0.180	4.57	0.023	0.58	8.00	SST	CG	N
0.234	5.944	W-33	0.75	19.050	0.186	4.724	5.00	0.875	0.460	11.684	2.300	10.230	0.290	7.37	0.024	0.61	11.00	SST	C	N
0.234	5.944	10158	0.75	19.050	0.184	4.674	6.20	1.085	0.430	10.922	2.600	11.565	0.330	8.38	0.025	0.64	12.00	MW	C	Z
0.234	5.944	A11-38	0.75	19.050	0.180	4.572	11.00	1.925	0.290	7.366	3.100	13.789	0.240	6.10	0.027	0.69	9.00	SST	CG	N
0.234	5.944	EE-25	0.75	19.050	0.176	4.470	11.00	1.925	0.340	8.636	3.800	16.902	0.320	8.13	0.029	0.74	11.00	SST	CG	N
0.234	5.944	O-112	0.75	19.050	0.172	4.369	20.00	3.500	0.350	8.890	7.000	31.136	0.340	8.64	0.031	0.79	10.00	MW	C	GI
0.234	5.944	B5-15	0.75	19.050	0.156	3.962	53.00	9.275	0.180	4.572	9.300	41.366	0.410	10.41	0.039	0.99	10.50	SPR	CG	N
0.234	5.944	2533	0.78	19.812	0.174	4.420	15.00	2.625	0.420	10.668	6.300	28.022	0.360	9.14	0.030	0.76	11.00	MW	C	Z
0.234	5.944	3549	0.81	20.574	0.192	4.877	2.40	0.420	0.500	12.700	1.200	5.338	0.320	8.13	0.021	0.53	14.00	MW	C	Z
0.234	5.944	3661	0.81	20.574	0.190	4.826	3.50	0.613	0.530	13.462	1.900	8.451	0.290	7.37	0.022	0.56	12.00	MW	C	Z
0.234	5.944	B5-44	0.81	20.574	0.190	4.826	5.40	0.945	0.500	12.700	2.700	12.010	0.190	4.83	0.022	0.56	8.50	MW	CG	Z
0.234	5.944	00-85	0.81	20.574	0.190	4.826	2.80	0.490	0.470	11.938	1.300	5.782	0.340	8.64	0.022	0.56	14.50	MW	CG	BO
0.234	5.944	S-1339	0.81	20.574	0.190	4.826	3.40	0.595	0.530	13.462	1.800	8.006	0.240	6.10	0.022	0.56	11.00	SST	CG	N
0.234	5.944	V-44	0.81	20.574	0.186	4.724	4.10	0.718	0.460	11.684	1.900	8.451	0.350	8.89	0.024	0.61	14.50	MW	CG	N
0.234	5.944	00-74	0.81	20.574	0.178	4.521	13.00	2.275	0.410	10.414	5.200	23.130	0.310	7.87	0.028	0.71	10.00	MW	C	N
0.234	5.944	S-1177	0.81	20.574	0.174	4.420	11.00	1.925	0.370	9.398	4.300	19.126	0.410	10.41	0.030	0.76	12.50	SST	CG	N
0.234	5.944	L-67	0.81	20.574	0.164	4.166	25.00	4.375	0.270	6.858	6.800	30.246	0.460	11.68	0.035	0.89	13.00	SPR	CG	Z
0.234	5.944	A9-7	0.81	20.574	0.162	4.115	36.00	6.300	0.210	5.334	7.400	32.915	0.380	9.65	0.036	0.91	10.70	SPR	CG	N
0.234	5.944	3000	0.81	20.574	0.154	3.912	59.00	10.325	0.170	4.318	10.000	44.480	0.420	10.67	0.040	1.02	10.50	SPR	CG	Z
0.234	5.944	LL-27	0.84	21.336	0.204	5.182	0.80	0.140	0.690	17.526	0.550	2.446	0.160	4.06	0.015	0.38	9.50	SST	C	N
0.234	5.944	H-72	0.84	21.336	0.182	4.623	15.00	2.625	0.270	6.858	4.200	18.682	0.200	5.08	0.026	0.66	6.75	MW	CG	N
0.234	5.944	JJ-79	0.84	21.336	0.164	4.166	20.00	3.500	0.320	8.128	6.400	28.467	0.480	12.19	0.035	0.89	13.80	SST	CG	N
0.234	5.944	GG-26	0.84	21.336	0.154	3.912	34.00	5.950	0.240	6.096	8.400	37.363	0.600	15.24	0.040	1.02	15.00	SST	CG	N
0.234	5.944	JJ-36	0.84	21.336	0.150	3.810	66.00	11.550	0.160	4.064	11.000	48.928	0.480	12.19	0.042	1.07	10.50	SST	C	N
0.234	5.944	4200	0.88	22.352	0.194	4.928	2.00	0.350	0.590	14.986	1.200	5.338	0.290	7.37	0.020	0.51	13.50	MW	C	Z
0.234	5.944	B14-57	0.88	22.352	0.192	4.877	3.40	0.595	0.650	16.510	2.200	9.786	0.220	5.59	0.021	0.53	10.50	MW	CG	Z
0.234	5.944	W-16	0.88	22.352	0.184	4.674	5.90	1.033	0.420	10.668	2.500	11.120	0.300	7.62	0.025	0.64	11.00	SST	C	N
0.234	5.944	G-47	0.88	22.352	0.180	4.572	13.00	2.275	0.350	8.890	4.700	20.906	0.260	6.60	0.027	0.69	8.50	MW	C	N
0.234	5.944	Q-21	0.88	22.352	0.170	4.318	18.00	3.150	0.300	7.620	5.500	24.464	0.380	9.65	0.032	0.81	12.00	SPR	CG	N
0.234	5.944	DD-52	0.88	22.352	0.154	3.912	63.00	11.025	0.220	5.588	14.000	62.272	0.400	10.16	0.040	1.02	10.00	MW	CG	N
0.234	5.944	LL-71	0.88	22.352	0.154	3.912	92.00	16.100	0.110	2.794										




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.234	5.944	3551	1.09	27.686	0.180	4.572	5.70	0.998	0.640	16.256	3.600	16.013	0.460	11.68	0.027	0.69	17.00	MW CG Z
0.234	5.944	10198	1.13	28.702	0.208	5.283	0.27	0.047	0.900	22.860	0.250	1.112	0.220	5.59	0.013	0.33	16.00	MW CG N
0.234	5.944	B-90	1.13	28.702	0.182	4.623	6.60	1.155	0.630	16.002	4.200	18.682	0.360	9.14	0.026	0.66	13.00	MW CG N
0.234	5.944	A-34	1.13	28.702	0.160	4.064	25.00	4.375	0.320	8.128	8.000	35.584	0.630	16.00	0.037	0.94	16.00	SPR C GI
0.234	5.944	3848	1.13	28.702	0.150	3.810	53.00	9.275	0.220	5.588	12.000	53.376	0.630	16.00	0.042	1.07	14.00	SPR C Z
0.234	5.944	L-22	1.19	30.226	0.184	4.674	4.00	0.700	0.620	15.748	2.500	11.120	0.390	9.91	0.025	0.64	15.50	SST CG N
0.234	5.944	K-10	1.19	30.226	0.176	4.470	6.60	1.155	0.580	14.732	3.800	16.902	0.540	13.72	0.029	0.74	17.50	SST C N
0.234	5.944	S-796	1.19	30.226	0.174	4.420	7.00	1.225	0.610	15.494	4.300	19.126	0.570	14.48	0.030	0.76	19.00	SST CG N
0.234	5.944	U-33	1.19	30.226	0.174	4.420	7.60	1.330	0.590	14.986	4.500	20.016	0.600	15.24	0.030	0.76	20.00	MW CG GI
0.234	5.944	W-58	1.19	30.226	0.154	3.912	34.00	5.950	0.280	7.112	9.400	41.811	0.600	15.24	0.040	1.02	15.00	SST CG N
0.234	5.944	00-61	1.22	30.988	0.174	4.420	7.60	1.330	0.590	14.986	4.500	20.016	0.630	16.00	0.030	0.76	20.00	MW C Z
0.234	5.944	B3-65	1.23	31.242	0.174	4.420	9.10	1.593	0.690	17.526	6.300	28.022	0.510	12.95	0.030	0.76	17.00	MW CG N
0.234	5.944	A11-27	1.25	31.750	0.210	5.334	0.15	0.026	1.000	25.400	0.150	0.667	0.250	6.35	0.012	0.30	20.00	MW C BO
0.234	5.944	S-3123	1.25	31.750	0.188	4.775	4.70	0.823	0.440	11.176	2.100	9.341	0.250	6.35	0.023	0.58	10.00	SST C N
0.234	5.944	S-213	1.25	31.750	0.186	4.724	2.90	0.508	0.800	20.320	2.300	10.230	0.440	11.18	0.024	0.61	17.50	SST C N
0.234	5.944	B1-41	1.25	31.750	0.182	4.623	4.80	0.840	0.580	14.732	2.800	12.454	0.430	10.92	0.026	0.66	15.50	SST C N
0.234	5.944	S-212	1.25	31.750	0.182	4.623	5.30	0.928	0.530	13.462	2.800	12.454	0.390	9.91	0.026	0.66	14.00	SST C N
0.234	5.944	CC-81	1.25	31.750	0.164	4.166	15.00	2.625	0.430	10.922	6.400	28.467	0.670	17.02	0.035	0.89	18.00	SST C N
0.234	5.944	Q-91	1.25	31.750	0.148	3.759	50.00	8.750	0.240	6.096	12.000	53.376	0.690	17.53	0.043	1.09	16.00	SPR CG N
0.234	5.944	S-88	1.28	32.512	0.186	4.724	4.10	0.718	0.570	14.478	2.300	10.230	0.340	8.64	0.024	0.61	13.00	SST C N
0.234	5.944	B9-41	1.31	33.274	0.192	4.877	3.00	0.525	0.780	19.812	2.400	10.675	0.240	6.10	0.021	0.53	11.50	MW CG Z
0.234	5.944	W-6	1.31	33.274	0.176	4.470	5.40	0.945	0.670	17.018	3.600	16.013	0.640	16.26	0.029	0.74	21.00	SST C N
0.234	5.944	B3-43	1.33	33.782	0.180	4.572	5.10	0.893	0.790	20.066	4.000	17.792	0.540	13.72	0.027	0.69	19.00	MW C BO
0.234	5.944	DD-46	1.44	36.576	0.194	4.928	1.20	0.210	1.000	25.400	1.200	5.338	0.420	10.67	0.020	0.51	20.00	SST C N
0.234	5.944	S-1540	1.50	38.100	0.206	5.232	0.50	0.088	0.990	25.146	0.500	2.224	0.170	4.32	0.014	0.36	11.00	SST C N
0.234	5.944	Q-Q-47	1.50	38.100	0.192	4.877	1.30	0.228	1.000	25.400	1.400	6.227	0.460	11.68	0.021	0.53	21.00	SST C N
0.234	5.944	S-224	1.50	38.100	0.186	4.724	2.80	0.490	0.820	20.828	2.300	10.230	0.450	11.43	0.024	0.61	17.80	SST C N
0.234	5.944	B5-26	1.50	38.100	0.160	4.064	20.00	3.500	0.400	10.160	8.000	35.584	0.730	18.54	0.037	0.94	19.80	SPR CG N
0.234	5.944	CC-3	1.50	38.100	0.154	3.912	30.00	5.250	0.340	8.636	10.000	44.480	0.800	20.32	0.040	1.02	19.00	SPR C N
0.234	5.944	L-51	1.69	42.926	0.206	5.232	0.13	0.023	1.100	27.940	0.140	0.623	0.620	15.75	0.014	0.36	43.00	MW C N
0.234	5.944	DD-95	1.81	45.974	0.188	4.775	2.10	0.368	0.990	25.146	2.100	9.341	0.480	12.19	0.023	0.58	20.00	SST C N
0.234	5.944	TT-68	1.88	47.752	0.194	4.928	0.97	0.170	1.400	35.560	1.400	6.227	0.480	12.19	0.020	0.51	23.00	SST C N
0.234	5.944	2804	2.00	50.800	0.164	4.166	11.00	1.925	0.830	21.082	9.500	42.256	0.910	23.11	0.035	0.89	26.00	MW CG Z
0.234	5.944	3976	2.22	56.388	0.132	3.353	68.00	11.900	0.280	7.112	19.000	84.512	1.350	34.29	0.051	1.30	25.50	SPR C Z
0.234	5.944	O-51	2.25	57.150	0.204	5.182	0.29	0.051	1.800	45.720	0.530	2.357	0.410	10.41	0.015	0.38	26.00	MW CG N
0.234	5.944	10431	2.25	57.150	0.172	4.369	7.20	1.260	0.970	24.638	7.000	31.136	0.780	19.81	0.031	0.79	24.00	MW C GI
0.234	5.944	3680	2.44	61.976	0.182	4.623	4.60	0.805	0.900	22.860	4.200	18.682	0.490	12.45	0.026	0.66	17.80	MW C Z
0.234	5.944	B4-21	2.50	63.500	0.174	4.420	5.00	0.875	1.300	33.020	6.300	28.022	0.910	23.11	0.030	0.76	29.30	MW C N
0.234	5.944	2653	2.53	64.262	0.164	4.166	14.00	2.450	0.490	12.446	6.800	30.246	0.750	19.05	0.035	0.89	21.50	SPR CG Z
0.234	5.944	B12-68	2.56	65.024	0.184	4.674	2.40	0.420	1.600	40.640	3.700	16.458	0.730	18.54	0.025	0.64	28.00	MW C Z
0.234	5.944	O-42	2.75	69.850	0.150	3.810	15.00	2.625	0.710	18.034	11.000	48.928	1.600	40.64	0.042	1.07	38.00	SST CG N
0.234	5.944	11306	3.25	82.550	0.184	4.674	1.10	0.193	2.000	50.800	2.200	9.786	1.300	33.02	0.025	0.64	51.00	SST C N
0.234	5.944	B2-68	3.33	84.582	0.158	4.013	8.90	1.558	0.970	24.638	8.700	38.698	1.810	45.97	0.038	0.97	46.50	SPR C N
0.234	5.944	3636	4.50	114.300	0.162	4.115	6.10	1.068	1.700	43.180	10.000	44.480	1.940	49.28	0.036	0.91	53.00	MW CG C Z
0.234	5.944	12738	7.25	184.150	0.156	3.962	9.30	1.628	1.000	25.400	9.300	41.366	1.990	50.55	0.039	0.99	50.00	SPR C N
0.24	6.096	70520	0.25	6.350	0.208	5.283	6.20	1.085	0.170	4.318	1.000	4.448	0.050	1.27	0.016	0.41	3.38	MW CG N
0.24	6.096	70520S	0.25	6.350	0.208	5.283	5.30	0.928	0.130	3.302	0.680	3.025	0.050	1.27	0.016	0.41	3.38	SST CG N
0.24	6.096	70536	0.25	6.350	0.204	5.182	9.50	1.663	0.150	3.810	1.500	6.672	0.060	1.52	0.018	0.46	3.50	MW CG N
0.24	6.096	70553	0.25	6.350	0.200	5.080	13.00	2.275	0.160	4.064	2.000	8.896	0.080	2.03	0.020	0.51	3.75	MW CG N
0.24	6.096	70553S	0.25	6.350	0.200	5.080	11.00	1.925	0.120	3.048	1.300	5.782	0.080	2.03	0.020	0.51	3.75	SST CG N
0.24	6.096	70577	0.25	6.350	0.196	4.978	19.00	3.325	0.140	3.556	2.600	11.565	0.080	2.03	0.022	0.56	3.75	MW CG N
0.24	6.096	70577S	0.25	6.350	0.196	4.978	16.00	2.800	0.110	2.794	1.800	8.006	0.080	2.03	0.022	0.56	3.75	SST CG N
0.24	6.096	70521	0.31	7.874	0.208	5.283	4.80	0.840	0.210	5.334	1.000	4.448	0.060	1.52	0.016	0.41	3.75	MW CG N
0.24	6.096	70521S	0.31	7.874	0.208	5.283	4.10	0.718	0.170	4.318	0.680	3.025	0.060	1.52	0.016	0.41	3.75	SST CG N
0.24	6.096	70537	0.31	7.874	0.204	5.182	7.40	1.295	0.200	5.080	1.500	6.672	0.070	1.78	0.018	0.46	3.88	MW CG N
0.24	6.096	70537S	0.31	7.874	0.204	5.182	6.20	1.085	0.160	4.064	0.970	4.315	0.070	1.78	0.018	0.46	3.88	




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h								
0.24	6.096	70579	0.38	9.652	0.196	4.978	12.00	2.100	0.220	5.588	2.600	11.565	0.100	2.54	0.022	0.56	4.63	MW	CG	N
0.24	6.096	70579S	0.38	9.652	0.196	4.978	10.00	1.750	0.170	4.318	1.800	8.006	0.100	2.54	0.022	0.56	4.63	SST	CG	N
0.24	6.096	70600	0.38	9.652	0.192	4.877	17.00	2.975	0.210	5.334	3.400	15.123	0.120	3.05	0.024	0.61	4.88	MW	CG	N
0.24	6.096	70600S	0.38	9.652	0.192	4.877	14.00	2.450	0.160	4.064	2.300	10.230	0.120	3.05	0.024	0.61	4.88	SST	CG	N
0.24	6.096	70621	0.38	9.652	0.188	4.775	24.00	4.200	0.170	4.318	4.100	18.237	0.130	3.30	0.026	0.66	4.88	MW	CG	N
0.24	6.096	70621S	0.38	9.652	0.188	4.775	20.00	3.500	0.140	3.556	2.700	12.010	0.130	3.30	0.026	0.66	4.88	SST	CG	N
0.24	6.096	70643	0.38	9.652	0.182	4.623	33.00	5.775	0.170	4.318	5.600	24.909	0.150	3.81	0.029	0.74	5.25	MW	CG	N
0.24	6.096	70643S	0.38	9.652	0.182	4.623	28.00	4.900	0.140	3.556	3.800	16.902	0.150	3.81	0.029	0.74	5.25	SST	CG	N
0.24	6.096	70661	0.38	9.652	0.176	4.470	52.00	9.100	0.140	3.556	7.500	33.360	0.170	4.32	0.032	0.81	5.25	MW	CG	N
0.24	6.096	70661S	0.38	9.652	0.176	4.470	44.00	7.700	0.110	2.794	5.000	22.240	0.170	4.32	0.032	0.81	5.25	SST	CG	N
0.24	6.096	70680	0.38	9.652	0.170	4.318	70.00	12.250	0.130	3.302	9.200	40.922	0.190	4.83	0.035	0.89	5.50	MW	CG	N
0.24	6.096	70680S	0.38	9.652	0.170	4.318	60.00	10.500	0.100	2.540	6.300	28.022	0.190	4.83	0.035	0.89	5.50	SST	CG	N
0.24	6.096	70701	0.38	9.652	0.164	4.166	101.00	17.675	0.120	3.048	12.000	53.376	0.210	5.33	0.038	0.97	5.63	MW	CG	N
0.24	6.096	70701S	0.38	9.652	0.164	4.166	86.00	15.050	0.090	2.286	7.900	35.139	0.210	5.33	0.038	0.97	5.63	SST	CG	N
0.24	6.096	70721	0.38	9.652	0.160	4.064	121.00	21.175	0.110	2.794	14.000	62.272	0.230	5.84	0.040	1.02	5.75	MW	CG	N
0.24	6.096	70721S	0.38	9.652	0.160	4.064	103.00	18.025	0.090	2.286	9.200	40.922	0.230	5.84	0.040	1.02	5.75	SST	CG	N
0.24	6.096	70742	0.38	9.652	0.156	3.962	151.00	26.425	0.100	2.540	16.000	71.168	0.250	6.35	0.042	1.07	5.88	MW	CG	N
0.24	6.096	70742S	0.38	9.652	0.156	3.962	128.00	22.400	0.080	2.032	11.000	48.928	0.250	6.35	0.042	1.07	5.88	SST	CG	N
0.24	6.096	70761	0.38	9.652	0.150	3.810	215.00	37.625	0.090	2.286	19.000	84.512	0.260	6.60	0.045	1.14	5.75	MW	CG	N
0.24	6.096	70761S	0.38	9.652	0.150	3.810	183.00	32.025	0.070	1.778	13.000	57.824	0.260	6.60	0.045	1.14	5.75	SST	CG	N
0.24	6.096	70523	0.44	11.176	0.208	5.283	3.30	0.578	0.310	7.874	1.000	4.448	0.070	1.78	0.016	0.41	4.50	MW	CG	N
0.24	6.096	70523S	0.44	11.176	0.208	5.283	2.80	0.490	0.240	6.096	0.680	3.025	0.070	1.78	0.016	0.41	4.50	SST	CG	N
0.24	6.096	70539	0.44	11.176	0.204	5.182	5.00	0.875	0.290	7.366	1.500	6.672	0.090	2.29	0.018	0.46	4.75	MW	CG	N
0.24	6.096	70539S	0.44	11.176	0.204	5.182	4.30	0.753	0.230	5.842	0.970	4.315	0.090	2.29	0.018	0.46	4.75	SST	CG	N
0.24	6.096	70556	0.44	11.176	0.200	5.080	6.50	1.138	0.310	7.874	2.000	8.896	0.110	2.79	0.020	0.51	5.38	MW	CG	N
0.24	6.096	70556S	0.44	11.176	0.200	5.080	5.50	0.963	0.240	6.096	1.300	5.782	0.110	2.79	0.020	0.51	5.38	SST	CG	N
0.24	6.096	70580	0.44	11.176	0.196	4.978	9.90	1.733	0.270	6.858	2.600	11.565	0.120	3.05	0.022	0.56	5.25	MW	CG	N
0.24	6.096	70580S	0.44	11.176	0.196	4.978	8.40	1.470	0.210	5.334	1.800	8.006	0.120	3.05	0.022	0.56	5.25	SST	CG	N
0.24	6.096	70601	0.44	11.176	0.192	4.877	14.00	2.450	0.240	6.096	3.400	15.123	0.130	3.30	0.024	0.61	5.38	MW	CG	N
0.24	6.096	70601S	0.44	11.176	0.192	4.877	12.00	2.100	0.190	4.826	2.300	10.230	0.130	3.30	0.024	0.61	5.38	SST	CG	N
0.24	6.096	70622	0.44	11.176	0.188	4.775	20.00	3.500	0.200	5.080	4.100	18.237	0.140	3.56	0.026	0.66	5.38	MW	CG	N
0.24	6.096	70622S	0.44	11.176	0.188	4.775	17.00	2.975	0.160	4.064	2.700	12.010	0.140	3.56	0.026	0.66	5.38	SST	CG	N
0.24	6.096	70644	0.44	11.176	0.182	4.623	27.00	4.725	0.210	5.334	5.600	24.909	0.170	4.32	0.029	0.74	6.00	MW	CG	N
0.24	6.096	70644S	0.44	11.176	0.182	4.623	23.00	4.025	0.160	4.064	3.800	16.902	0.170	4.32	0.029	0.74	6.00	SST	CG	N
0.24	6.096	70662	0.44	11.176	0.176	4.470	43.00	7.525	0.170	4.318	7.500	33.360	0.190	4.83	0.032	0.81	5.88	MW	CG	N
0.24	6.096	70662S	0.44	11.176	0.176	4.470	37.00	6.475	0.140	3.556	5.000	22.240	0.190	4.83	0.032	0.81	5.88	SST	CG	N
0.24	6.096	70681	0.44	11.176	0.170	4.318	59.00	10.325	0.160	4.064	9.200	40.922	0.220	5.59	0.035	0.89	6.25	MW	CG	N
0.24	6.096	70681S	0.44	11.176	0.170	4.318	50.00	8.750	0.130	3.302	6.300	28.022	0.220	5.59	0.035	0.89	6.25	SST	CG	N
0.24	6.096	70702	0.44	11.176	0.164	4.166	84.00	14.700	0.140	3.556	12.000	53.376	0.240	6.10	0.038	0.97	6.38	MW	CG	N
0.24	6.096	70702S	0.44	11.176	0.164	4.166	72.00	12.600	0.110	2.794	7.900	35.139	0.240	6.10	0.038	0.97	6.38	SST	CG	N
0.24	6.096	70722	0.44	11.176	0.160	4.064	100.00	17.500	0.140	3.556	14.000	62.272	0.270	6.86	0.040	1.02	6.63	MW	CG	N
0.24	6.096	70722S	0.44	11.176	0.160	4.064	85.00	14.875	0.110	2.794	9.200	40.922	0.270	6.86	0.040	1.02	6.63	SST	CG	N
0.24	6.096	70743	0.44	11.176	0.156	3.962	123.00	21.525	0.130	3.302	16.000	71.168	0.280	7.11	0.042	1.07	6.63	MW	CG	N
0.24	6.096	70743S	0.44	11.176	0.156	3.962	105.00	18.375	0.100	2.540	11.000	48.928	0.280	7.11	0.042	1.07	6.63	SST	CG	N
0.24	6.096	70762	0.44	11.176	0.150	3.810	176.00	30.800	0.110	2.794	19.000	84.512	0.290	7.37	0.045	1.14	6.50	MW	CG	N
0.24	6.096	70762S	0.44	11.176	0.150	3.810	149.00	26.075	0.090	2.286	13.000	57.824	0.290	7.37	0.045	1.14	6.50	SST	CG	N
0.24	6.096	70524	0.50	12.700	0.208	5.283	2.90	0.508	0.360	9.144	1.000	4.448	0.080	2.03	0.016	0.41	4.88	MW	CG	N
0.24	6.096	70524S	0.50	12.700	0.208	5.283	2.50	0.438	0.280	7.112	0.680	3.025	0.080	2.03	0.016	0.41	4.88	SST	CG	N
0.24	6.096	70540	0.50	12.700	0.204	5.182	4.40	0.770	0.340	8.636	1.500	6.672	0.090	2.29	0.018	0.46	5.13	MW	CG	N
0.24	6.096	70540S	0.50	12.700	0.204	5.182	3.70	0.648	0.260	6.604	0.970	4.315	0.090	2.29	0.018	0.46	5.13	SST	CG	N
0.24	6.096	70557	0.50	12.700	0.200	5.080	5.70	0.998	0.350	8.890	2.000	8.896	0.120	3.05	0.020	0.51	5.88	MW	CG	N
0.24	6.096	70557S	0.50	12.700	0.200	5.080	4.80	0.840	0.280	7.112	1.300	5.782	0.120	3.05	0.020	0.51	5.88	SST	CG	N
0.24	6.096	70581	0.50	12.700	0.196	4.978	8.80	1.540	0.300	7.620	2.600	11.565	0.130	3.30	0.022	0.56	5.75	MW	CG	N
0.24	6.096	70581S	0.50	12.700	0.196	4.978	7.40	1.295	0.240	6.096	1.800	8.006								




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
0.24	6.096	70582S	0.56 14.224	0.196 4.978	6.60 1.155	0.270 6.858	1.800 8.006	0.140 3.56	0.022 0.56	6.25	SST CG	N
0.24	6.096	70603	0.56 14.224	0.192 4.877	11.00 1.925	0.320 8.128	3.400 15.123	0.150 3.81	0.024 0.61	6.38	MW CG	N
0.24	6.096	70603S	0.56 14.224	0.192 4.877	9.10 1.593	0.250 6.350	2.300 10.230	0.150 3.81	0.024 0.61	6.38	SST CG	N
0.24	6.096	70624	0.56 14.224	0.188 4.775	14.00 2.450	0.280 7.112	4.100 18.237	0.170 4.32	0.026 0.66	6.63	MW CG	N
0.24	6.096	70624S	0.56 14.224	0.188 4.775	12.00 2.100	0.220 5.588	2.700 12.010	0.170 4.32	0.026 0.66	6.63	SST CG	N
0.24	6.096	70646	0.56 14.224	0.182 4.623	21.00 3.675	0.270 6.858	5.600 24.909	0.210 5.33	0.029 0.74	7.25	MW CG	N
0.24	6.096	70646S	0.56 14.224	0.182 4.623	18.00 3.150	0.210 5.334	3.800 16.902	0.210 5.33	0.029 0.74	7.25	SST CG	N
0.24	6.096	70664	0.56 14.224	0.176 4.470	32.00 5.600	0.230 5.842	7.500 33.360	0.230 5.84	0.032 0.81	7.25	MW CG	N
0.24	6.096	70664S	0.56 14.224	0.176 4.470	27.00 4.725	0.180 4.572	5.000 22.240	0.230 5.84	0.032 0.81	7.25	SST CG	N
0.24	6.096	70683	0.56 14.224	0.170 4.318	44.00 7.700	0.210 5.334	9.200 40.922	0.270 6.86	0.035 0.89	7.75	MW CG	N
0.24	6.096	70683S	0.56 14.224	0.170 4.318	37.00 6.475	0.170 4.318	6.300 28.022	0.270 6.86	0.035 0.89	7.75	SST CG	N
0.24	6.096	70704	0.56 14.224	0.164 4.166	63.00 11.025	0.190 4.826	12.000 53.376	0.290 7.37	0.038 0.97	7.75	MW CG	N
0.24	6.096	70704S	0.56 14.224	0.164 4.166	54.00 9.450	0.150 3.810	7.900 35.139	0.290 7.37	0.038 0.97	7.75	SST CG	N
0.24	6.096	70724	0.56 14.224	0.160 4.064	74.00 12.950	0.180 4.572	14.000 62.272	0.330 8.38	0.040 1.02	8.25	MW CG	N
0.24	6.096	70724S	0.56 14.224	0.160 4.064	63.00 11.025	0.150 3.810	9.200 40.922	0.330 8.38	0.040 1.02	8.25	SST CG	N
0.24	6.096	70745	0.56 14.224	0.156 3.962	94.00 16.450	0.170 4.318	16.000 71.168	0.340 8.64	0.042 1.07	8.13	MW CG	N
0.24	6.096	70745S	0.56 14.224	0.156 3.962	80.00 14.000	0.130 3.302	11.000 48.928	0.340 8.64	0.042 1.07	8.13	SST CG	N
0.24	6.096	70764	0.56 14.224	0.150 3.810	130.00 22.750	0.150 3.810	19.000 84.512	0.370 9.40	0.045 1.14	8.13	MW CG	N
0.24	6.096	70764S	0.56 14.224	0.150 3.810	111.00 19.425	0.120 3.048	13.000 57.824	0.370 9.40	0.045 1.14	8.13	SST CG	N
0.24	6.096	B3-61	0.59 14.986	0.150 3.810	159.00 27.825	0.120 3.048	19.000 84.512	0.320 8.13	0.045 1.14	7.00	MW CG	N
0.24	6.096	70526	0.63 16.002	0.208 5.283	2.30 0.403	0.450 11.430	1.000 4.448	0.090 2.29	0.016 0.41	5.63	MW CG	N
0.24	6.096	70526S	0.63 16.002	0.208 5.283	2.00 0.350	0.350 8.890	0.680 3.025	0.090 2.29	0.016 0.41	5.63	SST CG	N
0.24	6.096	70542	0.63 16.002	0.204 5.182	3.50 0.613	0.420 10.668	1.500 6.672	0.110 2.79	0.018 0.46	6.00	MW CG	N
0.24	6.096	70542S	0.63 16.002	0.204 5.182	2.90 0.508	0.330 8.382	0.970 4.315	0.110 2.79	0.018 0.46	6.00	SST CG	N
0.24	6.096	70560	0.63 16.002	0.200 5.080	5.10 0.893	0.390 9.906	2.000 8.896	0.130 3.30	0.020 0.51	6.25	MW CG	N
0.24	6.096	70561	0.63 16.002	0.200 5.080	3.30 0.578	0.460 11.684	1.500 6.672	0.170 4.32	0.020 0.51	8.50	MW CG	N
0.24	6.096	70560S	0.63 16.002	0.200 5.080	4.30 0.753	0.310 7.874	1.300 5.782	0.130 3.30	0.020 0.51	6.25	SST CG	N
0.24	6.096	70561S	0.63 16.002	0.200 5.080	2.80 0.490	0.460 11.684	1.300 5.782	0.170 4.32	0.020 0.51	8.50	SST CG	N
0.24	6.096	70583	0.63 16.002	0.196 4.978	6.90 1.208	0.380 9.652	2.600 11.565	0.150 3.81	0.022 0.56	6.75	MW CG	N
0.24	6.096	70583S	0.63 16.002	0.196 4.978	5.90 1.033	0.300 7.620	1.800 8.006	0.150 3.81	0.022 0.56	6.75	SST CG	N
0.24	6.096	70604	0.63 16.002	0.192 4.877	9.60 1.680	0.360 9.144	3.400 15.123	0.170 4.32	0.024 0.61	7.00	MW CG	N
0.24	6.096	70604S	0.63 16.002	0.192 4.877	8.10 1.418	0.280 7.112	2.300 10.230	0.170 4.32	0.024 0.61	7.00	SST CG	N
0.24	6.096	70625	0.63 16.002	0.188 4.775	13.00 2.275	0.320 8.128	4.100 18.237	0.190 4.83	0.026 0.66	7.38	MW CG	N
0.24	6.096	70625S	0.63 16.002	0.188 4.775	11.00 1.925	0.250 6.350	2.700 12.010	0.190 4.83	0.026 0.66	7.38	SST CG	N
0.24	6.096	70647	0.63 16.002	0.182 4.623	18.00 3.150	0.300 7.620	5.600 24.909	0.230 5.84	0.029 0.74	7.88	MW CG	N
0.24	6.096	70647S	0.63 16.002	0.182 4.623	16.00 2.800	0.240 6.096	3.800 16.902	0.230 5.84	0.029 0.74	7.88	SST CG	N
0.24	6.096	70665	0.63 16.002	0.176 4.470	28.00 4.900	0.270 6.858	7.500 33.360	0.260 6.60	0.032 0.81	8.00	MW CG	N
0.24	6.096	70665S	0.63 16.002	0.176 4.470	24.00 4.200	0.210 5.334	5.000 22.240	0.260 6.60	0.032 0.81	8.00	SST CG	N
0.24	6.096	70684	0.63 16.002	0.170 4.318	39.00 6.825	0.240 6.096	9.200 40.922	0.290 7.37	0.035 0.89	8.38	MW CG	N
0.24	6.096	70684S	0.63 16.002	0.170 4.318	33.00 5.775	0.190 4.826	6.300 28.022	0.290 7.37	0.035 0.89	8.38	SST CG	N
0.24	6.096	70705	0.63 16.002	0.164 4.166	57.00 9.975	0.210 5.334	12.000 53.376	0.320 8.13	0.038 0.97	8.38	MW CG	N
0.24	6.096	70705S	0.63 16.002	0.164 4.166	48.00 8.400	0.160 4.064	7.900 35.139	0.320 8.13	0.038 0.97	8.38	SST CG	N
0.24	6.096	70725	0.63 16.002	0.160 4.064	67.00 11.725	0.200 5.080	14.000 62.272	0.360 9.14	0.040 1.02	8.88	MW CG	N
0.24	6.096	70725S	0.63 16.002	0.160 4.064	57.00 9.975	0.160 4.064	9.200 40.922	0.360 9.14	0.040 1.02	8.88	SST CG	N
0.24	6.096	70746	0.63 16.002	0.156 3.962	85.00 14.875	0.180 4.572	16.000 71.168	0.370 9.40	0.042 1.07	8.75	MW CG	N
0.24	6.096	70746S	0.63 16.002	0.156 3.962	72.00 12.600	0.150 3.810	11.000 48.928	0.370 9.40	0.042 1.07	8.75	SST CG	N
0.24	6.096	70765	0.63 16.002	0.150 3.810	115.00 20.125	0.170 4.318	19.000 84.512	0.400 10.16	0.045 1.14	8.88	MW CG	N
0.24	6.096	70765S	0.63 16.002	0.150 3.810	98.00 17.150	0.130 3.302	13.000 57.824	0.400 10.16	0.045 1.14	8.88	SST CG	N
0.24	6.096	70527	0.69 17.526	0.208 5.283	2.00 0.350	0.510 12.954	1.000 4.448	0.100 2.54	0.016 0.41	6.25	SST CG	N
0.24	6.096	70543	0.69 17.526	0.204 5.182	3.10 0.543	0.470 11.938	1.500 6.672	0.120 3.05	0.018 0.46	6.50	MW CG	N
0.24	6.096	70543S	0.69 17.526	0.204 5.182	2.60 0.455	0.370 9.398	0.970 4.315	0.120 3.05	0.018 0.46	6.50	SST CG	N
0.24	6.096	70562	0.69 17.526	0.200 5.080	4.10 0.718	0.490 12.446	2.000 8.896	0.150 3.81	0.020 0.51	7.38	MW CG	N
0.24	6.096	70562S	0.69 17.526	0.200 5.080	3.40 0.595	0.390 9.906	1.300 5.782	0.150 3.81	0.020 0.51	7.38	SST CG	N
0.24	6.096	70584	0.69 17.526	0.196 4.978	6.10 1.068	0.430 10.922	2.600 11.565	0.160 4.06	0.022 0.56	7.38	MW CG	N
0.24	6.096	70584S	0.69 17.526	0.196 4.978	5.20 0.910	0.340 8.636	1.800 8.006	0.160 4.06	0.022 0.56	7.38	SST CG	N
0.24	6.096	70605	0.69 17.526	0.192 4.877	8.70 1.523	0.390 9.906	3.400 15.123	0.180 4.57	0.024 0.61	7.50	MW CG	N
0.24	6.096	70605S	0.69 17.526	0.192 4.877	7.40 1.295	0.310 7.874	2.300 10.230	0.180 4.57	0.024 0.61	7.50	SST CG	N
0.24	6.096	70626	0.69 17.526	0.188 4.775	11.00 1.925	0.370 9.398	4.100 18.237	0.210 5.33	0.026 0.66	8.13	MW CG	N
0.24	6.096	70626S	0.69 17.526	0.188 4.775	9.40 1.645	0.290 7.366	2.700 12.010	0.210 5.33	0.026 0.66	8.13	SST CG	N
0.24	6.096	70648	0.69 17.526	0.182 4.623	17.00 2.975	0.340 8.636	5.600 24.909	0.250 6.35	0.029 0.74	8.50	MW CG	N
0.24	6.096	70648S	0.69 17.526	0.182 4.623	14.00 2.450	0.270 6.858	3.800 16.902	0.250 6.35	0.029 0.74	8.50	SST CG	N
0.24	6.096	70666	0.69 17.526	0.176 4.470	25.00 4.375	0.300 7.620	7.500 33.360	0.280 7.11	0.032 0.81	8.75	MW CG	N
0.24	6.096	70666S	0.69 17.526	0.176 4.470	21.00 3.675	0.240 6.096	5.000 22.240	0.280 7.11	0.032 0.81	8.75	SST CG	N
0.24	6.096	70685	0.69 17.526	0.170 4.318	35.00 6.125	0.270 6.858	9.200 40.922	0.320 8.13	0.035 0.89	9.25	MW CG	N
0.24	6.096	70685S	0.69 17.526	0.170 4.318	30.00 5.250	0.210 5.						




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
0.24	6.096	70585	0.75	19.050	0.196	4.978	5.60	0.980	0.480	12.192	2.600	11.565	0.170	4.32	0.022	0.56	7.88	MW	CG	N
0.24	6.096	70585S	0.75	19.050	0.196	4.978	4.70	0.823	0.370	9.398	1.800	8.006	0.170	4.32	0.022	0.56	7.88	SST	CG	N
0.24	6.096	B4-35	0.75	19.050	0.196	4.978	4.70	0.823	0.370	9.398	1.800	8.006	0.180	4.57	0.022	0.56	8.00	SST	CG	N
0.24	6.096	70606	0.75	19.050	0.192	4.877	7.80	1.365	0.440	11.176	3.400	15.123	0.200	5.08	0.024	0.61	8.13	MW	CG	N
0.24	6.096	70606S	0.75	19.050	0.192	4.877	6.60	1.155	0.340	8.636	2.300	10.230	0.200	5.08	0.024	0.61	8.13	SST	CG	N
0.24	6.096	70627	0.75	19.050	0.188	4.775	10.00	1.750	0.410	10.414	4.100	18.237	0.230	5.84	0.026	0.66	8.75	MW	CG	N
0.24	6.096	70627S	0.75	19.050	0.188	4.775	8.50	1.488	0.320	8.128	2.700	12.010	0.230	5.84	0.026	0.66	8.75	SST	CG	N
0.24	6.096	70649	0.75	19.050	0.182	4.623	15.00	2.625	0.370	9.398	5.600	24.909	0.260	6.60	0.029	0.74	9.13	MW	CG	N
0.24	6.096	70649S	0.75	19.050	0.182	4.623	13.00	2.275	0.290	7.366	3.800	16.902	0.260	6.60	0.029	0.74	9.13	SST	CG	N
0.24	6.096	70667	0.75	19.050	0.176	4.470	22.00	3.850	0.340	8.636	7.500	33.360	0.310	7.87	0.032	0.81	9.63	MW	CG	N
0.24	6.096	70667S	0.75	19.050	0.176	4.470	19.00	3.325	0.270	6.858	5.000	22.240	0.310	7.87	0.032	0.81	9.63	SST	CG	N
0.24	6.096	70686	0.75	19.050	0.170	4.318	31.00	5.425	0.290	7.366	9.200	40.922	0.350	8.89	0.035	0.89	10.00	MW	CG	N
0.24	6.096	70686S	0.75	19.050	0.170	4.318	27.00	4.725	0.230	5.842	6.300	28.022	0.350	8.89	0.035	0.89	10.00	SST	CG	N
0.24	6.096	70707	0.75	19.050	0.164	4.166	46.00	8.050	0.250	6.350	12.000	53.376	0.380	9.65	0.038	0.97	9.88	MW	CG	N
0.24	6.096	70707S	0.75	19.050	0.164	4.166	39.00	6.825	0.200	5.080	7.900	35.139	0.380	9.65	0.038	0.97	9.88	SST	CG	N
0.24	6.096	70727	0.75	19.050	0.160	4.064	55.00	9.625	0.250	6.350	14.000	62.272	0.420	10.67	0.040	1.02	10.40	MW	CG	N
0.24	6.096	70727S	0.75	19.050	0.160	4.064	47.00	8.225	0.200	5.080	9.200	40.922	0.420	10.67	0.040	1.02	10.40	SST	CG	N
0.24	6.096	70748	0.75	19.050	0.156	3.962	65.00	11.375	0.240	6.096	16.000	71.168	0.460	11.68	0.042	1.07	10.90	MW	CG	N
0.24	6.096	70748S	0.75	19.050	0.156	3.962	55.00	9.625	0.190	4.826	11.000	48.928	0.460	11.68	0.042	1.07	10.90	SST	CG	N
0.24	6.096	70767	0.75	19.050	0.150	3.810	93.00	16.275	0.210	5.334	19.000	84.512	0.480	12.19	0.045	1.14	10.60	MW	CG	N
0.24	6.096	70767S	0.75	19.050	0.150	3.810	79.00	13.825	0.160	4.064	13.000	57.824	0.480	12.19	0.045	1.14	10.60	SST	CG	N
0.24	6.096	70529	0.81	20.574	0.208	5.283	1.70	0.298	0.610	15.494	1.000	4.448	0.110	2.79	0.016	0.41	6.88	MW	CG	N
0.24	6.096	70529S	0.81	20.574	0.208	5.283	1.40	0.245	0.470	11.938	0.680	3.025	0.110	2.79	0.016	0.41	6.88	SST	CG	N
0.24	6.096	70545	0.81	20.574	0.204	5.182	2.60	0.455	0.560	14.224	1.500	6.672	0.130	3.30	0.018	0.46	7.25	MW	CG	N
0.24	6.096	70545S	0.81	20.574	0.204	5.182	2.20	0.385	0.440	11.176	0.970	4.315	0.130	3.30	0.018	0.46	7.25	SST	CG	N
0.24	6.096	70564	0.81	20.574	0.200	5.080	3.40	0.595	0.600	15.240	2.000	8.896	0.170	4.32	0.020	0.51	8.50	MW	CG	N
0.24	6.096	70564S	0.81	20.574	0.200	5.080	2.80	0.490	0.470	11.938	1.300	5.782	0.170	4.32	0.020	0.51	8.50	SST	CG	N
0.24	6.096	70586	0.81	20.574	0.196	4.978	5.10	0.893	0.520	13.208	2.600	11.565	0.180	4.57	0.022	0.56	8.38	MW	CG	N
0.24	6.096	70586S	0.81	20.574	0.196	4.978	4.30	0.753	0.410	10.414	1.800	8.006	0.180	4.57	0.022	0.56	8.38	SST	CG	N
0.24	6.096	70607	0.81	20.574	0.192	4.877	7.20	1.260	0.480	12.192	3.400	15.123	0.210	5.33	0.024	0.61	8.63	MW	CG	N
0.24	6.096	70607S	0.81	20.574	0.192	4.877	6.10	1.068	0.370	9.398	2.300	10.230	0.210	5.33	0.024	0.61	8.63	SST	CG	N
0.24	6.096	70628	0.81	20.574	0.188	4.775	9.20	1.610	0.450	11.430	4.100	18.237	0.240	6.10	0.026	0.66	9.38	MW	CG	N
0.24	6.096	70628S	0.81	20.574	0.188	4.775	7.80	1.365	0.350	8.890	2.700	12.010	0.240	6.10	0.026	0.66	9.38	SST	CG	N
0.24	6.096	70650	0.81	20.574	0.182	4.623	14.00	2.450	0.410	10.414	5.600	24.909	0.290	7.37	0.029	0.74	9.88	MW	CG	N
0.24	6.096	70650S	0.81	20.574	0.182	4.623	12.00	2.100	0.320	8.128	3.800	16.902	0.290	7.37	0.029	0.74	9.88	SST	CG	N
0.24	6.096	70668	0.81	20.574	0.176	4.470	20.00	3.500	0.370	9.398	7.500	33.360	0.330	8.38	0.032	0.81	10.40	MW	CG	N
0.24	6.096	70668S	0.81	20.574	0.176	4.470	17.00	2.975	0.290	7.366	5.000	22.240	0.330	8.38	0.032	0.81	10.40	SST	CG	N
0.24	6.096	70678	0.81	20.574	0.170	4.318	29.00	5.075	0.320	8.128	9.200	40.922	0.380	9.65	0.035	0.89	10.80	MW	CG	N
0.24	6.096	70678S	0.81	20.574	0.170	4.318	24.00	4.200	0.260	6.604	6.300	28.022	0.380	9.65	0.035	0.89	10.80	SST	CG	N
0.24	6.096	70708	0.81	20.574	0.164	4.166	42.00	7.350	0.280	7.112	12.000	53.376	0.400	10.16	0.038	0.97	10.60	MW	CG	N
0.24	6.096	70708S	0.81	20.574	0.164	4.166	36.00	6.300	0.220	5.588	7.900	35.139	0.400	10.16	0.038	0.97	10.60	SST	CG	N
0.24	6.096	70728	0.81	20.574	0.160	4.064	49.00	8.575	0.280	7.112	14.000	62.272	0.460	11.68	0.040	1.02	11.40	MW	CG	N
0.24	6.096	70728S	0.81	20.574	0.160	4.064	41.00	7.175	0.220	5.588	9.200	40.922	0.460	11.68	0.040	1.02	11.40	SST	CG	N
0.24	6.096	70749	0.81	20.574	0.156	3.962	60.00	10.500	0.260	6.604	16.000	71.168	0.490	12.45	0.042	1.07	11.60	MW	CG	N
0.24	6.096	70749S	0.81	20.574	0.156	3.962	51.00	8.925	0.210	5.334	11.000	48.928	0.490	12.45	0.042	1.07	11.60	SST	CG	N
0.24	6.096	70768	0.81	20.574	0.150	3.810	85.00	14.875	0.220	5.588	19.000	84.512	0.510	12.95	0.045	1.14	11.40	MW	CG	N
0.24	6.096	70768S	0.81	20.574	0.150	3.810	72.00	12.600	0.180	4.572	13.000	57.824	0.510	12.95	0.045	1.14	11.40	SST	CG	N
0.24	6.096	70530	0.88	22.352	0.208	5.283	1.60	0.280	0.640	16.256	1.000	4.448	0.120	3.05	0.016	0.41	7.25	MW	CG	N
0.24	6.096	70530S	0.88	22.352	0.208	5.283	1.40	0.245	0.500	12.700	1.300	5.782	0.180	4.57	0.020	0.51	9.00	SST	CG	N
0.24	6.096	70546	0.88	22.352	0.204	5.182	2.40	0.420	0.610	15.494	1.500	6.672	0.140	3.56	0.018	0.46	7.75	MW	CG	N
0.24	6.096	70546S	0.88	22.352	0.204	5.182	2.00	0.350	0.480	12.192	0.970	4.315	0.140	3.56	0.018	0.46	7.75	SST	CG	N
0.24	6.096	70565	0.88	22.352	0.200	5.080	3.10	0.543	0.640	16.256	2.000	8.896	0.180	4.57	0.020	0.51	9.00	MW	CG	N
0.24	6.096	70565S	0.88	22.352	0.200	5.080	2.60	0.455	0.500	12.700	1.300	5.782	0.180	4.57	0.020	0.51	9.00	SST	CG	N
0.24	6.096	70588	0.88	22.352	0.196	4.978	4.70	0.823												

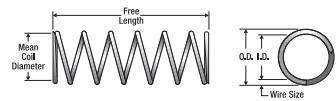


Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.24	6.096	70610S	0.94	23.876	0.192	4.877	5.00	0.875	0.450	11.430	2.300	10.230	0.240	6.10	0.024	0.61	10.00	SST CG N
0.24	6.096	70631	0.94	23.876	0.188	4.775	7.80	1.365	0.520	13.208	4.100	18.237	0.280	7.11	0.026	0.66	10.60	MW CG N
0.24	6.096	70631S	0.94	23.876	0.188	4.775	6.60	1.155	0.410	10.414	2.700	12.010	0.280	7.11	0.026	0.66	10.60	SST CG N
0.24	6.096	70652	0.94	23.876	0.182	4.623	12.00	2.100	0.480	12.192	5.600	24.909	0.330	8.38	0.029	0.74	11.30	MW CG N
0.24	6.096	70652S	0.94	23.876	0.182	4.623	9.90	1.733	0.380	9.652	3.800	16.902	0.330	8.38	0.029	0.74	11.30	SST CG N
0.24	6.096	70670	0.94	23.876	0.176	4.470	17.00	2.975	0.430	10.922	7.500	33.360	0.370	9.40	0.032	0.81	11.60	MW CG N
0.24	6.096	70670S	0.94	23.876	0.176	4.470	15.00	2.625	0.340	8.636	5.000	22.240	0.370	9.40	0.032	0.81	11.60	SST CG N
0.24	6.096	70689	0.94	23.876	0.170	4.318	24.00	4.200	0.380	9.652	9.200	40.922	0.430	10.92	0.035	0.89	12.40	MW CG N
0.24	6.096	70689S	0.94	23.876	0.170	4.318	21.00	3.675	0.300	7.620	6.300	28.022	0.430	10.92	0.035	0.89	12.40	SST CG N
0.24	6.096	70710	0.94	23.876	0.164	4.166	35.00	6.125	0.340	8.636	12.000	53.376	0.480	12.19	0.038	0.97	12.50	MW CG N
0.24	6.096	70710S	0.94	23.876	0.164	4.166	30.00	5.250	0.270	6.858	7.900	35.139	0.480	12.19	0.038	0.97	12.50	SST CG N
0.24	6.096	70730	0.94	23.876	0.160	4.064	42.00	7.350	0.320	8.128	14.000	62.272	0.520	13.21	0.040	1.02	13.00	MW CG N
0.24	6.096	70730S	0.94	23.876	0.160	4.064	36.00	6.300	0.260	6.604	9.200	40.922	0.520	13.21	0.040	1.02	13.00	SST CG N
0.24	6.096	70751	0.94	23.876	0.156	3.962	51.00	8.925	0.310	7.874	16.000	71.168	0.560	14.22	0.042	1.07	13.30	MW CG N
0.24	6.096	70751S	0.94	23.876	0.156	3.962	43.00	7.525	0.240	6.096	11.000	48.928	0.560	14.22	0.042	1.07	13.30	SST CG N
0.24	6.096	70770	0.94	23.876	0.150	3.810	72.00	12.600	0.260	6.604	19.000	84.512	0.590	14.99	0.045	1.14	13.00	MW CG N
0.24	6.096	70770S	0.94	23.876	0.150	3.810	62.00	10.850	0.210	5.334	13.000	57.824	0.590	14.99	0.045	1.14	13.00	SST CG N
0.24	6.096	70531	1.00	25.400	0.208	5.283	1.40	0.245	0.740	18.796	1.000	4.448	0.130	3.30	0.016	0.41	8.00	MW CG N
0.24	6.096	70531S	1.00	25.400	0.208	5.283	1.20	0.210	0.580	14.732	0.680	3.025	0.130	3.30	0.016	0.41	8.00	SST CG N
0.24	6.096	70548	1.00	25.400	0.204	5.182	2.10	0.368	0.700	17.780	1.500	6.672	0.160	4.06	0.018	0.46	8.63	MW CG N
0.24	6.096	70548S	1.00	25.400	0.204	5.182	1.80	0.315	0.540	13.716	0.970	4.315	0.160	4.06	0.018	0.46	8.63	SST CG N
0.24	6.096	70568	1.00	25.400	0.200	5.080	2.80	0.490	0.730	18.542	2.000	8.896	0.200	5.08	0.020	0.51	9.88	MW CG N
0.24	6.096	70568S	1.00	25.400	0.200	5.080	2.30	0.403	0.570	14.478	1.300	5.782	0.200	5.08	0.020	0.51	9.88	SST CG N
0.24	6.096	70591	1.00	25.400	0.196	4.978	4.20	0.735	0.630	16.002	2.600	11.565	0.210	5.33	0.022	0.56	9.75	MW CG N
0.24	6.096	70591S	1.00	25.400	0.196	4.978	3.60	0.630	0.490	12.446	1.800	8.006	0.210	5.33	0.022	0.56	9.75	SST CG N
0.24	6.096	70611	1.00	25.400	0.192	4.877	5.80	1.015	0.590	14.986	3.400	15.123	0.250	6.35	0.024	0.61	10.30	MW CG N
0.24	6.096	70611S	1.00	25.400	0.192	4.877	4.90	0.858	0.460	11.684	2.300	10.230	0.250	6.35	0.024	0.61	10.30	SST CG N
0.24	6.096	70632	1.00	25.400	0.188	4.775	7.40	1.295	0.550	13.970	4.100	18.237	0.290	7.37	0.026	0.66	11.00	MW CG N
0.24	6.096	70632S	1.00	25.400	0.188	4.775	6.30	1.103	0.430	10.922	2.700	12.010	0.290	7.37	0.026	0.66	11.00	SST CG N
0.24	6.096	70653	1.00	25.400	0.182	4.623	11.00	1.925	0.500	12.700	5.600	24.909	0.340	8.64	0.029	0.74	11.80	MW CG N
0.24	6.096	70653S	1.00	25.400	0.182	4.623	9.50	1.663	0.400	10.160	3.800	16.902	0.340	8.64	0.029	0.74	11.80	SST CG N
0.24	6.096	70671	1.00	25.400	0.176	4.470	16.00	2.800	0.470	11.938	7.500	33.360	0.400	10.16	0.032	0.81	12.50	MW CG N
0.24	6.096	70671S	1.00	25.400	0.176	4.470	14.00	2.450	0.370	9.398	5.000	22.240	0.400	10.16	0.032	0.81	12.50	SST CG N
0.24	6.096	70690	1.00	25.400	0.170	4.318	23.00	4.025	0.410	10.414	9.200	40.922	0.460	11.68	0.035	0.89	13.00	MW CG N
0.24	6.096	70690S	1.00	25.400	0.170	4.318	19.00	3.325	0.320	8.128	6.300	28.022	0.460	11.68	0.035	0.89	13.00	SST CG N
0.24	6.096	70711	1.00	25.400	0.164	4.166	33.00	5.775	0.360	9.144	12.000	53.376	0.500	12.70	0.038	0.97	13.10	MW CG N
0.24	6.096	70711S	1.00	25.400	0.164	4.166	28.00	4.900	0.290	7.366	7.900	35.139	0.500	12.70	0.038	0.97	13.10	SST CG N
0.24	6.096	70731	1.00	25.400	0.160	4.064	39.00	6.825	0.350	8.890	14.000	62.272	0.550	13.97	0.040	1.02	13.80	MW CG N
0.24	6.096	70731S	1.00	25.400	0.160	4.064	33.00	5.775	0.280	7.112	9.200	40.922	0.550	13.97	0.040	1.02	13.80	SST CG N
0.24	6.096	70752	1.00	25.400	0.156	3.962	48.00	8.400	0.330	8.382	16.000	71.168	0.590	14.99	0.042	1.07	14.00	MW CG N
0.24	6.096	70752S	1.00	25.400	0.156	3.962	41.00	7.175	0.260	6.604	11.000	48.928	0.590	14.99	0.042	1.07	14.00	SST CG N
0.24	6.096	70771	1.00	25.400	0.150	3.810	67.00	11.725	0.280	7.112	19.000	84.512	0.620	15.75	0.045	1.14	13.80	MW CG N
0.24	6.096	70771S	1.00	25.400	0.150	3.810	57.00	9.975	0.220	5.588	13.000	57.824	0.620	15.75	0.045	1.14	13.80	SST CG N
0.24	6.096	70570	1.13	28.702	0.200	5.080	2.70	0.473	0.740	18.796	2.000	8.896	0.200	5.08	0.020	0.51	10.00	MW CG N
0.24	6.096	70570S	1.13	28.702	0.200	5.080	2.30	0.403	0.580	14.732	1.300	5.782	0.200	5.08	0.020	0.51	10.00	SST CG N
0.24	6.096	70593	1.13	28.702	0.196	4.978	3.60	0.630	0.730	18.542	2.600	11.565	0.240	6.10	0.022	0.56	11.00	MW CG N
0.24	6.096	70593S	1.13	28.702	0.196	4.978	3.10	0.543	0.570	14.478	1.800	8.006	0.240	6.10	0.022	0.56	11.00	SST CG N
0.24	6.096	70613	1.13	28.702	0.192	4.877	4.90	0.858	0.700	17.780	3.400	15.123	0.280	7.11	0.024	0.61	11.60	MW CG N
0.24	6.096	70613S	1.13	28.702	0.192	4.877	4.20	0.735	0.550	13.970	2.300	10.230	0.280	7.11	0.024	0.61	11.60	SST CG N
0.24	6.096	70634	1.13	28.702	0.188	4.775	6.40	1.120	0.640	16.256	4.100	18.237	0.330	8.38	0.026	0.66	12.50	MW CG N
0.24	6.096	70634S	1.13	28.702	0.188	4.775	5.40	0.945	0.500	12.700	2.700	12.010	0.330	8.38	0.026	0.66	12.50	SST CG N
0.24	6.096	70654	1.13	28.702	0.182	4.623	9.70	1.698	0.580	14.732	5.600	24.909	0.380	9.65	0.029	0.74	13.10	MW CG N
0.24	6.096	70654S	1.13	28.702	0.182	4.623	8.20	1.435	0.460	11.684	3.800	16.902	0.380	9.65	0.029	0.74	13.10	SST CG N
0.24	6.096	70673	1.13	28.702	0.176	4.470	14.00	2.450	0.530	13.462	7.500	33.360	0.450	11.43	0.032	0.81	14.00	MW CG N
0.24	6.096	70673S	1.13	28.702	0.176	4.470	12.00	2.100	0.420	10.668	5.000	22.240	0.450	11.43	0.032	0.81	14.00	SST CG N
0.24	6.096	70692	1.13	28.702	0.170	4.318	20.00	3.500	0.470	11.938	9.200	40.922	0.520					




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh								
0.24	6.096	70674S	1.25	31.750	0.176	4.470	11.00	1.925	0.450	11.430	5.000	22.240	0.480	12.19	0.032	0.81	14.90	SST	CG	N
0.24	6.096	70693S	1.25	31.750	0.170	4.318	18.00	3.150	0.520	13.208	9.200	40.922	0.560	14.22	0.035	0.89	16.00	MW	CG	N
0.24	6.096	70713S	1.25	31.750	0.170	4.318	15.00	2.625	0.410	10.414	6.300	28.022	0.560	14.22	0.035	0.89	16.00	SST	CG	N
0.24	6.096	70713S	1.25	31.750	0.164	4.166	26.00	4.550	0.450	11.430	12.000	53.376	0.610	15.49	0.038	0.97	16.00	MW	CG	N
0.24	6.096	70733S	1.25	31.750	0.164	4.166	22.00	3.850	0.360	9.144	7.900	35.139	0.610	15.49	0.038	0.97	16.00	SST	CG	N
0.24	6.096	70733S	1.25	31.750	0.160	4.064	31.00	5.425	0.440	11.176	14.000	62.272	0.680	17.27	0.040	1.02	16.90	MW	CG	N
0.24	6.096	70733S	1.25	31.750	0.160	4.064	26.00	4.550	0.350	8.890	9.200	40.922	0.680	17.27	0.040	1.02	16.90	SST	CG	N
0.24	6.096	70754S	1.25	31.750	0.156	3.962	38.00	6.650	0.410	10.414	16.000	71.168	0.720	18.29	0.042	1.07	17.30	MW	CG	N
0.24	6.096	70754S	1.25	31.750	0.156	3.962	32.00	5.600	0.330	8.382	11.000	48.928	0.720	18.29	0.042	1.07	17.30	SST	CG	N
0.24	6.096	70773S	1.25	31.750	0.150	3.810	53.00	9.275	0.360	9.144	19.000	84.512	0.770	19.56	0.045	1.14	17.00	MW	CG	N
0.24	6.096	70773S	1.25	31.750	0.150	3.810	45.00	7.875	0.290	7.366	13.000	57.824	0.770	19.56	0.045	1.14	17.00	SST	CG	N
0.24	6.096	70573S	1.38	35.052	0.200	5.080	2.20	0.385	0.910	23.114	2.000	8.896	0.240	6.10	0.020	0.51	11.90	MW	CG	N
0.24	6.096	70573S	1.38	35.052	0.200	5.080	1.90	0.333	0.710	18.034	1.300	5.782	0.240	6.10	0.020	0.51	11.90	SST	CG	N
0.24	6.096	70596S	1.38	35.052	0.196	4.978	2.90	0.508	0.910	23.114	2.600	11.565	0.290	7.37	0.022	0.56	13.30	MW	CG	N
0.24	6.096	70596S	1.38	35.052	0.196	4.978	2.50	0.438	0.710	18.034	1.800	8.006	0.290	7.37	0.022	0.56	13.30	SST	CG	N
0.24	6.096	70616S	1.38	35.052	0.192	4.877	3.90	0.683	0.880	22.352	3.400	15.123	0.340	8.64	0.024	0.61	14.10	MW	CG	N
0.24	6.096	70616S	1.38	35.052	0.192	4.877	3.30	0.578	0.690	17.526	2.300	10.230	0.340	8.64	0.024	0.61	14.10	SST	CG	N
0.24	6.096	70637S	1.38	35.052	0.188	4.775	5.20	0.910	0.780	19.812	4.100	18.237	0.390	9.91	0.026	0.66	14.90	MW	CG	N
0.24	6.096	70637S	1.38	35.052	0.188	4.775	4.40	0.770	0.620	15.748	2.700	12.010	0.390	9.91	0.026	0.66	14.90	SST	CG	N
0.24	6.096	70656S	1.38	35.052	0.182	4.623	7.80	1.365	0.720	18.288	5.600	24.909	0.460	11.68	0.029	0.74	15.90	MW	CG	N
0.24	6.096	70656S	1.38	35.052	0.182	4.623	6.60	1.155	0.570	14.478	3.800	16.902	0.460	11.68	0.029	0.74	15.90	SST	CG	N
0.24	6.096	70675S	1.38	35.052	0.176	4.470	12.00	2.100	0.650	16.510	7.500	33.360	0.530	13.46	0.032	0.81	16.50	MW	CG	N
0.24	6.096	70675S	1.38	35.052	0.176	4.470	9.90	1.733	0.510	12.954	5.000	22.240	0.530	13.46	0.032	0.81	16.50	SST	CG	N
0.24	6.096	70694S	1.38	35.052	0.170	4.318	16.00	2.800	0.580	14.732	9.200	40.922	0.620	15.75	0.035	0.89	17.80	MW	CG	N
0.24	6.096	70694S	1.38	35.052	0.170	4.318	14.00	2.450	0.460	11.684	6.300	28.022	0.620	15.75	0.035	0.89	17.80	SST	CG	N
0.24	6.096	70714S	1.38	35.052	0.164	4.166	23.00	4.025	0.510	12.954	12.000	53.376	0.670	17.02	0.038	0.97	17.60	MW	CG	N
0.24	6.096	70714S	1.38	35.052	0.164	4.166	20.00	3.500	0.400	10.160	7.900	35.139	0.670	17.02	0.038	0.97	17.60	SST	CG	N
0.24	6.096	70734S	1.38	35.052	0.160	4.064	28.00	4.900	0.490	12.446	14.000	62.272	0.750	19.05	0.040	1.02	18.80	MW	CG	N
0.24	6.096	70734S	1.38	35.052	0.160	4.064	23.00	4.025	0.390	9.906	9.200	40.922	0.750	19.05	0.040	1.02	18.80	SST	CG	N
0.24	6.096	70755S	1.38	35.052	0.156	3.962	29.00	5.075	0.370	9.398	11.000	48.928	0.800	20.32	0.042	1.07	19.00	SST	CG	N
0.24	6.096	70533S	1.50	38.100	0.208	5.283	0.90	0.158	1.100	27.940	1.000	4.448	0.180	4.57	0.016	0.41	11.40	MW	CG	N
0.24	6.096	70533S	1.50	38.100	0.208	5.283	0.77	0.135	0.890	22.606	0.680	3.025	0.180	4.57	0.016	0.41	11.40	SST	CG	N
0.24	6.096	70550S	1.50	38.100	0.204	5.182	1.40	0.245	1.000	25.400	1.500	6.672	0.210	5.33	0.018	0.46	11.90	MW	CG	N
0.24	6.096	70550S	1.50	38.100	0.204	5.182	1.20	0.210	0.820	20.828	0.970	4.315	0.210	5.33	0.018	0.46	11.90	SST	CG	N
0.24	6.096	70574S	1.50	38.100	0.200	5.080	1.50	0.263	0.870	22.098	1.300	5.782	0.280	7.11	0.020	0.51	14.10	SST	CG	N
0.24	6.096	70574S	1.50	38.100	0.200	5.080	1.20	0.235	0.770	19.558	2.600	11.565	0.300	7.62	0.022	0.56	13.60	MW	CG	N
0.24	6.096	70597S	1.50	38.100	0.196	4.978	2.80	0.490	0.940	23.876	2.700	12.010	0.410	10.41	0.026	0.66	15.60	SST	CG	N
0.24	6.096	70597S	1.50	38.100	0.196	4.978	2.40	0.420	0.740	18.796	1.800	8.006	0.300	7.62	0.022	0.56	13.60	SST	CG	N
0.24	6.096	70617S	1.50	38.100	0.192	4.877	3.70	0.648	0.920	23.368	3.400	15.123	0.350	8.89	0.024	0.61	14.80	MW	CG	N
0.24	6.096	70638S	1.50	38.100	0.188	4.775	4.90	0.858	0.830	21.082	4.100	18.237	0.410	10.41	0.026	0.66	15.60	MW	CG	N
0.24	6.096	70638S	1.50	38.100	0.188	4.775	4.20	0.735	0.660	16.764	2.700	12.010	0.410	10.41	0.026	0.66	15.60	SST	CG	N
0.24	6.096	70657S	1.50	38.100	0.182	4.623	7.30	1.278	0.770	19.558	5.600	24.909	0.490	12.45	0.029	0.74	16.90	MW	CG	N
0.24	6.096	70657S	1.50	38.100	0.182	4.623	6.20	1.085	0.610	15.494	3.800	16.902	0.490	12.45	0.029	0.74	16.90	SST	CG	N
0.24	6.096	70676S	1.50	38.100	0.176	4.470	11.00	1.925	0.700	17.780	7.500	33.360	0.570	14.48	0.032	0.81	17.80	MW	CG	N
0.24	6.096	70676S	1.50	38.100	0.176	4.470	9.10	1.593	0.550	13.970	5.000	22.240	0.570	14.48	0.032	0.81	17.80	SST	CG	N
0.24	6.096	70695S	1.50	38.100	0.170	4.318	15.00	2.625	0.630	16.002	9.200	40.922	0.670	17.02	0.035	0.89	19.00	MW	CG	N
0.24	6.096	70695S	1.50	38.100	0.170	4.318	12.00	2.100	0.500	12.700	6.300	28.022	0.670	17.02	0.035	0.89	19.00	SST	CG	N
0.24	6.096	70715S	1.50	38.100	0.164	4.166	21.00	3.675	0.550	13.970	12.000	53.376	0.730	18.54	0.038	0.97	19.10	MW	CG	N
0.24	6.096	70715S	1.50	38.100	0.164	4.166	18.00	3.150	0.440	11.176	7.900	35.139	0.730	18.54	0.038	0.97	19.10	SST	CG	N
0.24	6.096	70735S	1.50	38.100	0.160	4.064	25.00	4.375	0.530	13.462	14.000	62.272	0.810	20.57	0.040	1.02	20.10	MW	CG	N
0.24	6.096	70735S	1.50	38.100	0.160	4.064	22.00	3.850	0.430	10.922	9.200	40.922	0.810	20.57	0.040	1.02	20.10	SST	CG	N
0.24	6.096	70756S	1.50	38.100	0.156	3.962	31.00	5.425	0.510	12.954	16.000	71.168	0.870	22.10	0.042	1.07	20.80	MW	CG	N
0.24	6.096	70756S	1.50	38.100	0.156	3.962	26.00	4.550	0.400	10.160	11.000	48.928	0.870	22.10	0.042	1.07	20.8			




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.24	6.096	7075S	1.75	44.450	0.156	3.962	23.00	4.025	0.470	11.938	11.000	48.928	1.000	25.40	0.042	1.07	23.80	SST	CG	N
0.24	6.096	7077S	1.75	44.450	0.150	3.810	37.00	6.475	0.520	13.208	19.000	84.512	1.060	26.92	0.045	1.14	23.50	MW	CG	N
0.24	6.096	70775S	1.75	44.450	0.150	3.810	31.00	5.425	0.410	10.414	13.000	57.824	1.060	26.92	0.045	1.14	23.50	SST	CG	N
0.24	6.096	70535	2.00	50.800	0.208	5.283	0.70	0.123	1.500	38.100	1.000	4.448	0.220	5.59	0.016	0.41	14.00	MW	CG	N
0.24	6.096	70535S	2.00	50.800	0.208	5.283	0.60	0.105	1.200	30.480	0.680	3.025	0.220	5.59	0.016	0.41	14.00	SST	CG	N
0.24	6.096	70552	2.00	50.800	0.204	5.182	1.00	0.175	1.500	38.100	1.500	6.672	0.280	7.11	0.018	0.46	15.80	MW	CG	N
0.24	6.096	70552S	2.00	50.800	0.204	5.182	0.85	0.149	1.100	27.940	0.970	4.315	0.280	7.11	0.018	0.46	15.80	SST	CG	N
0.24	6.096	70576	2.00	50.800	0.200	5.080	1.30	0.228	1.500	38.100	2.000	8.896	0.370	9.40	0.020	0.51	18.30	MW	CG	N
0.24	6.096	70576S	2.00	50.800	0.200	5.080	1.10	0.193	1.200	30.480	1.300	5.782	0.370	9.40	0.020	0.51	18.30	SST	CG	N
0.24	6.096	70599	2.00	50.800	0.196	4.978	2.10	0.368	1.300	33.020	2.600	11.565	0.390	9.91	0.022	0.56	17.90	MW	CG	N
0.24	6.096	70599S	2.00	50.800	0.196	4.978	1.70	0.298	1.000	25.400	1.800	8.006	0.390	9.91	0.022	0.56	17.90	SST	CG	N
0.24	6.096	70619	2.00	50.800	0.192	4.877	2.80	0.490	1.200	30.480	3.400	15.123	0.460	11.68	0.024	0.61	19.30	MW	CG	N
0.24	6.096	70619S	2.00	50.800	0.192	4.877	2.30	0.403	0.970	24.638	2.300	10.230	0.460	11.68	0.024	0.61	19.30	SST	CG	N
0.24	6.096	70640	2.00	50.800	0.188	4.775	3.60	0.630	1.100	27.940	4.100	18.237	0.530	13.46	0.026	0.66	20.50	MW	CG	N
0.24	6.096	70640S	2.00	50.800	0.188	4.775	3.10	0.543	0.890	22.606	2.700	12.010	0.530	13.46	0.026	0.66	20.50	SST	CG	N
0.24	6.096	70659	2.00	50.800	0.182	4.623	5.40	0.945	1.000	25.400	5.600	24.909	0.640	16.26	0.029	0.74	22.10	MW	CG	N
0.24	6.096	70659S	2.00	50.800	0.182	4.623	4.60	0.805	0.820	20.828	3.800	16.902	0.640	16.26	0.029	0.74	22.10	SST	CG	N
0.24	6.096	70678	2.00	50.800	0.176	4.470	8.00	1.400	0.940	23.876	7.500	33.360	0.740	18.80	0.032	0.81	23.00	MW	CG	N
0.24	6.096	70678S	2.00	50.800	0.176	4.470	6.80	1.190	0.740	18.796	5.000	22.240	0.740	18.80	0.032	0.81	23.00	SST	CG	N
0.24	6.096	70697	2.00	50.800	0.170	4.318	11.00	1.925	0.850	21.590	9.200	40.922	0.880	22.35	0.035	0.89	25.00	MW	CG	N
0.24	6.096	70697S	2.00	50.800	0.170	4.318	9.30	1.628	0.670	17.018	6.300	28.022	0.880	22.35	0.035	0.89	25.00	SST	CG	N
0.24	6.096	70717	2.00	50.800	0.164	4.166	16.00	2.800	0.750	19.050	12.000	53.376	0.960	24.38	0.038	0.97	25.40	MW	CG	N
0.24	6.096	70717S	2.00	50.800	0.164	4.166	13.00	2.275	0.600	15.240	7.900	35.139	0.960	24.38	0.038	0.97	25.40	SST	CG	N
0.24	6.096	70737	2.00	50.800	0.160	4.064	19.00	3.325	0.720	18.288	14.000	62.272	1.050	26.67	0.040	1.02	26.30	MW	CG	N
0.24	6.096	70737S	2.00	50.800	0.160	4.064	16.00	2.800	0.570	14.478	9.200	40.922	1.050	26.67	0.040	1.02	26.30	SST	CG	N
0.24	6.096	70758	2.00	50.800	0.156	3.962	23.00	4.025	0.680	17.272	16.000	71.168	1.130	28.70	0.042	1.07	27.00	MW	CG	N
0.24	6.096	70758S	2.00	50.800	0.156	3.962	20.00	3.500	0.540	13.716	11.000	48.928	1.130	28.70	0.042	1.07	27.00	SST	CG	N
0.24	6.096	70776	2.00	50.800	0.150	3.810	32.00	5.600	0.590	14.986	19.000	84.512	1.200	30.48	0.045	1.14	26.80	MW	CG	N
0.24	6.096	70776S	2.00	50.800	0.150	3.810	27.00	4.725	0.470	11.938	13.000	57.824	1.200	30.48	0.045	1.14	26.80	SST	CG	N
0.24	6.096	70698	2.25	57.150	0.170	4.318	9.70	1.698	0.950	24.130	9.200	40.922	0.980	24.89	0.035	0.89	27.90	MW	CG	N
0.24	6.096	70698S	2.25	57.150	0.170	4.318	8.20	1.435	0.760	19.304	6.300	28.022	0.980	24.89	0.035	0.89	27.90	SST	CG	N
0.24	6.096	70718	2.25	57.150	0.164	4.166	14.00	2.450	0.850	21.590	12.000	53.376	1.080	27.43	0.038	0.97	28.50	MW	CG	N
0.24	6.096	70718S	2.25	57.150	0.164	4.166	12.00	2.100	0.680	17.272	7.900	35.139	1.080	27.43	0.038	0.97	28.50	SST	CG	N
0.24	6.096	70738	2.25	57.150	0.160	4.064	17.00	2.975	0.820	20.828	14.000	62.272	1.200	30.48	0.040	1.02	29.90	MW	CG	N
0.24	6.096	70738S	2.25	57.150	0.160	4.064	14.00	2.450	0.660	16.764	9.200	40.922	1.200	30.48	0.040	1.02	29.90	SST	CG	N
0.24	6.096	70759	2.25	57.150	0.156	3.962	20.00	3.500	0.760	19.304	16.000	71.168	1.270	32.26	0.042	1.07	30.10	MW	CG	N
0.24	6.096	70759S	2.25	57.150	0.156	3.962	17.00	2.975	0.610	15.494	11.000	48.928	1.270	32.26	0.042	1.07	30.10	SST	CG	N
0.24	6.096	70777	2.25	57.150	0.150	3.810	28.00	4.900	0.670	17.018	19.000	84.512	1.350	34.29	0.045	1.14	30.00	MW	CG	N
0.24	6.096	70777S	2.25	57.150	0.150	3.810	24.00	4.200	0.530	13.462	13.000	57.824	1.350	34.29	0.045	1.14	30.00	SST	CG	N
0.24	6.096	A12-23	2.34	59.436	0.164	4.166	8.30	1.453	0.560	14.224	4.600	20.461	1.790	45.47	0.038	0.97	46.00	MW	C	N
0.24	6.096	70699	2.50	63.500	0.170	4.318	8.80	1.540	1.100	27.940	9.200	40.922	1.070	27.18	0.035	0.89	30.60	MW	CG	N
0.24	6.096	70699S	2.50	63.500	0.170	4.318	7.40	1.295	0.840	21.336	6.300	28.022	1.070	27.18	0.035	0.89	30.60	SST	CG	N
0.24	6.096	70719	2.50	63.500	0.164	4.166	12.00	2.100	0.950	24.130	12.000	53.376	1.200	30.48	0.038	0.97	31.60	MW	CG	N
0.24	6.096	70719S	2.50	63.500	0.164	4.166	10.00	1.750	0.760	19.304	7.900	35.139	1.200	30.48	0.038	0.97	31.60	SST	CG	N
0.24	6.096	70739	2.50	63.500	0.160	4.064	15.00	2.625	0.910	23.114	14.000	62.272	1.320	33.53	0.040	1.02	32.90	MW	CG	N
0.24	6.096	70739S	2.50	63.500	0.160	4.064	13.00	2.275	0.730	18.542	9.200	40.922	1.320	33.53	0.040	1.02	32.90	SST	CG	N
0.24	6.096	70760	2.50	63.500	0.156	3.962	18.00	3.150	0.870	22.098	16.000	71.168	1.420	36.07	0.042	1.07	33.90	MW	CG	N
0.24	6.096	70760S	2.50	63.500	0.156	3.962	15.00	2.625	0.690	17.526	11.000	48.928	1.420	36.07	0.042	1.07	33.90	SST	CG	N
0.24	6.096	70778	2.50	63.500	0.150	3.810	25.00	4.375	0.750	19.050	19.000	84.512	1.500	38.10	0.045	1.14	33.30	MW	CG	N
0.24	6.096	70778S	2.50	63.500	0.150	3.810	22.00	3.850	0.600	15.240	13.000	57.824	1.500	38.10	0.045	1.14	33.30	SST	CG	N
0.24	6.096	70740	3.25	82.550	0.160	4.064	22.00	3.850	0.630	16.002	14.000	62.272	0.930	23.62	0.040	1.02	23.30	MW	CG	N
0.24	6.096	70740S	3.25	82.550	0.160	4.064	18.00	3.150	0.500	12.700	9.200	40.922	0.930	23.62	0.040	1.02	23.30	SST	CG	N
0.24	6.096	70741	5.25	133.350	0.160	4.064	17.00	2.975	0.810	20.574	14.000	62.272	1.180	29.97	0.040	1.02	29.00	MW</		




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends C F sh									
0.25	6.350	EE-49	0.38	9.652	0.202	5.131	10.00	1.750	0.210	5.334	2.100	9.341	0.170	4.32	0.024	0.61	6.00	MW	C	Z
0.25	6.350	PP-55	0.38	9.652	0.202	5.131	14.00	2.450	0.230	5.842	3.200	14.234	0.140	3.56	0.024	0.61	5.00	MW	C	Z
0.25	6.350	II-41	0.38	9.652	0.198	5.029	19.00	3.325	0.200	5.080	3.900	17.347	0.160	4.06	0.026	0.66	5.00	MW	C	N
0.25	6.350	11366	0.38	9.652	0.194	4.928	19.00	3.325	0.170	4.318	3.300	14.678	0.160	4.06	0.028	0.71	5.75	SST	CG	N
0.25	6.350	BB-22	0.38	9.652	0.188	4.775	27.00	4.725	0.160	4.064	4.400	19.571	0.190	4.83	0.031	0.79	6.00	SST	CG	N
0.25	6.350	AA-39	0.38	9.652	0.186	4.724	42.00	7.350	0.110	2.794	4.800	21.350	0.160	4.06	0.032	0.81	5.00	SST	CG	N
0.25	6.350	3566	0.38	9.652	0.180	4.572	54.00	9.450	0.160	4.064	8.900	39.587	0.210	5.33	0.035	0.89	6.00	MW	CG	Z
0.25	6.350	A15-14	0.38	9.652	0.166	4.216	126.00	22.050	0.080	2.032	10.000	44.480	0.230	5.84	0.042	1.07	5.50	SST	CG	N
0.25	6.350	10958	0.41	10.414	0.226	5.740	0.37	0.065	0.300	7.620	0.110	0.489	0.110	2.79	0.012	0.30	8.00	MW	C	N
0.25	6.350	A-26	0.41	10.414	0.202	5.131	9.00	1.575	0.240	6.096	2.200	9.786	0.140	3.56	0.024	0.61	6.00	SST	CG	N
0.25	6.350	A-84	0.41	10.414	0.200	5.080	12.00	2.100	0.260	6.604	3.200	14.234	0.150	3.81	0.025	0.64	6.00	MW	CG	GI
0.25	6.350	F-15	0.41	10.414	0.198	5.029	19.00	3.325	0.200	5.080	3.900	17.347	0.160	4.06	0.026	0.66	5.00	MW	C	Z
0.25	6.350	II-33	0.41	10.414	0.198	5.029	13.00	2.275	0.210	5.334	2.600	11.565	0.160	4.06	0.026	0.66	6.00	SST	CG	N
0.25	6.350	B-89	0.41	10.414	0.196	4.978	14.00	2.450	0.190	4.826	2.600	11.565	0.220	5.59	0.027	0.69	7.00	MW	C	Z
0.25	6.350	12744	0.41	10.414	0.192	4.877	21.00	3.675	0.190	4.826	3.900	17.347	0.220	5.59	0.029	0.74	6.50	MW	C	N
0.25	6.350	WW-57	0.41	10.414	0.162	4.115	119.00	20.825	0.100	2.540	12.000	53.376	0.290	7.37	0.044	1.12	6.50	SST	CG	N
0.25	6.350	FF-73	0.44	11.176	0.222	5.639	1.10	0.193	0.340	8.636	0.360	1.601	0.100	2.54	0.014	0.36	6.00	MW	C	Z
0.25	6.350	CC-43	0.44	11.176	0.210	5.334	3.30	0.578	0.280	7.112	0.910	4.048	0.160	4.06	0.020	0.51	7.00	SST	C	N
0.25	6.350	L-14	0.44	11.176	0.210	5.334	2.30	0.403	0.240	6.096	0.560	2.491	0.200	5.08	0.020	0.51	9.00	SST	C	N
0.25	6.350	2821	0.44	11.176	0.206	5.232	8.10	1.418	0.300	7.620	2.400	10.675	0.140	3.56	0.022	0.56	5.50	MW	C	Z
0.25	6.350	AA-13	0.44	11.176	0.206	5.232	7.10	1.243	0.280	7.112	2.000	8.896	0.150	3.81	0.022	0.56	6.00	MW	C	Z
0.25	6.350	B18-156	0.44	11.176	0.202	5.131	12.00	2.100	0.280	7.112	3.300	14.678	0.130	3.30	0.024	0.61	5.50	MW	CG	N
0.25	6.350	F-97	0.44	11.176	0.200	5.080	14.00	2.450	0.250	6.350	3.500	15.568	0.160	4.06	0.025	0.64	5.50	MW	C	Z
0.25	6.350	B5-24	0.44	11.176	0.194	4.928	20.00	3.500	0.240	6.096	4.900	21.795	0.130	3.30	0.028	0.71	6.00	MW	CG	N
0.25	6.350	F-25	0.44	11.176	0.184	4.674	48.00	8.400	0.120	3.048	5.700	25.354	0.210	5.33	0.033	0.84	5.50	SPR	C	Z
0.25	6.350	A12-22	0.47	11.938	0.228	5.791	0.26	0.046	0.370	9.398	0.090	0.400	0.100	2.54	0.011	0.28	8.00	MW	C	Z
0.25	6.350	V-98	0.47	11.938	0.212	5.385	1.90	0.333	0.300	7.620	0.570	2.535	0.170	4.32	0.019	0.48	9.00	SST	CG	N
0.25	6.350	4278	0.47	11.938	0.210	5.334	3.80	0.665	0.310	7.874	1.200	5.338	0.160	4.06	0.020	0.51	7.00	MW	C	Z
0.25	6.350	BB-74	0.47	11.938	0.210	5.334	2.80	0.490	0.310	7.874	0.860	3.825	0.160	4.06	0.020	0.51	8.00	SST	CG	N
0.25	6.350	G-98	0.47	11.938	0.206	5.232	7.20	1.260	0.230	5.842	1.700	7.562	0.120	3.05	0.022	0.56	5.50	SST	CG	N
0.25	6.350	L-92	0.47	11.938	0.190	4.826	22.00	3.850	0.190	4.826	4.000	17.792	0.200	5.08	0.030	0.76	6.50	SST	CG	N
0.25	6.350	F-23	0.47	11.938	0.184	4.674	42.00	7.350	0.140	3.556	5.700	25.354	0.230	5.84	0.033	0.84	6.00	SPR	C	Z
0.25	6.350	J-71	0.47	11.938	0.172	4.369	71.00	12.425	0.120	3.048	8.800	39.142	0.270	6.86	0.039	0.99	7.00	SPR	CG	Z
0.25	6.350	B15-3	0.47	11.938	0.120	3.048	1351.00	236.425	0.030	0.762	34.000	151.232	0.330	8.38	0.065	1.65	5.00	SPR	CG	N
0.25	6.350	S-794	0.50	12.700	0.210	5.334	3.50	0.613	0.350	8.890	1.200	5.338	0.160	4.06	0.020	0.51	6.75	SST	C	N
0.25	6.350	V-100	0.50	12.700	0.210	5.334	3.20	0.560	0.320	8.128	1.000	4.448	0.180	4.57	0.020	0.51	8.00	MW	C	N
0.25	6.350	H-94	0.50	12.700	0.208	5.283	3.10	0.543	0.300	7.620	0.900	4.003	0.200	5.08	0.021	0.53	8.75	SST	C	N
0.25	6.350	S-717	0.50	12.700	0.206	5.232	6.60	1.155	0.260	6.604	1.700	7.562	0.150	3.81	0.022	0.56	5.75	SST	C	N
0.25	6.350	B15-68	0.50	12.700	0.204	5.182	4.40	0.770	0.290	7.366	1.300	5.782	0.210	5.33	0.023	0.58	9.00	SST	CG	N
0.25	6.350	BB-16	0.50	12.700	0.204	5.182	7.50	1.313	0.260	6.604	1.900	8.451	0.160	4.06	0.023	0.58	6.00	SST	C	N
0.25	6.350	HH-84	0.50	12.700	0.204	5.182	4.60	0.805	0.280	7.112	1.300	5.782	0.220	5.59	0.023	0.58	8.50	SST	C	N
0.25	6.350	GG-46	0.50	12.700	0.202	5.131	10.00	1.750	0.320	8.128	3.300	14.678	0.170	4.32	0.024	0.61	6.00	MW	C	Z
0.25	6.350	3985	0.50	12.700	0.200	5.080	16.00	2.800	0.210	5.334	3.500	15.568	0.150	3.81	0.025	0.64	5.00	MW	C	Z
0.25	6.350	B2-9	0.50	12.700	0.200	5.080	9.90	1.733	0.300	7.620	3.000	13.344	0.200	5.08	0.025	0.64	7.00	MW	C	N
0.25	6.350	F-13	0.50	12.700	0.200	5.080	12.00	2.100	0.280	7.112	3.500	15.568	0.180	4.57	0.025	0.64	6.00	MW	C	Z
0.25	6.350	S-1178	0.50	12.700	0.200	5.080	14.00	2.450	0.160	4.064	2.300	10.230	0.150	3.81	0.025	0.64	5.00	SST	C	N
0.25	6.350	Z-53	0.50	12.700	0.200	5.080	11.00	1.925	0.220	5.588	2.300	10.230	0.180	4.57	0.025	0.64	6.00	SST	C	N
0.25	6.350	2532	0.50	12.700	0.198	5.029	12.00	2.100	0.290	7.366	3.400	15.123	0.210	5.33	0.026	0.66	7.00	MW	C	Z
0.25	6.350	HH-13	0.50	12.700	0.196	4.978	8.60	1.505	0.260	6.604	2.200	9.786	0.240	6.10	0.027	0.69	9.00	SST	CG	N
0.25	6.350	XX-63	0.50	12.700	0.196	4.978	11.00	1.925	0.260	6.604	3.000	13.344	0.240	6.10	0.027	0.69	8.00	MW	C	Z
0.25	6.350	12734	0.50	12.700	0.192	4.877	17.00	2.975	0.210	5.334	3.600	16.013	0.200	5.08	0.029	0.74	6.75	SST	CG	N
0.25	6.350	BB-16	0.50	12.700	0.192	4.877	19.00	3.325	0.290	7.366	5.400	24.019	0.200	5.08	0.029	0.74	7.00	MW	CG	Z
0.25	6.350	NN-59	0.50	12.700	0.190	4.826	22.00	3.850	0.260	6.604	5.700	25.354	0.240	6.10	0.030	0.76	7.00	MW	C	N
0.25	6.350	2556	0.50	12.700	0.186	4.724	29.00	5.075	0.180	4.572	5.200	23.130	0.260	6.60	0.032	0.81	7.00	HD	C	Z
0.25	6.350	529	0.50	12.700	0.180	4.572	42.00	7												




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h								
0.25	6.350	J-10	0.56	14.224	0.206	5.232	4.10	0.718	0.360	9.144	1.500	6.672	0.200	5.08	0.022	0.56	8.00	SST	C	N
0.25	6.350	F-50	0.56	14.224	0.194	4.928	12.00	2.100	0.280	7.112	3.300	14.678	0.280	7.11	0.028	0.71	9.00	MW	C	Z
0.25	6.350	926	0.56	14.224	0.186	4.724	26.00	4.550	0.270	6.858	7.200	32.026	0.270	6.86	0.032	0.81	7.50	MW	C	Z
0.25	6.350	S-1109	0.56	14.224	0.154	3.912	134.00	23.450	0.106	2.692	14.200	63.162	0.367	9.32	0.048	1.21	7.70	SST	CG	N
0.25	6.350	M-100	0.59	14.986	0.208	5.283	3.40	0.595	0.430	10.922	1.500	6.672	0.170	4.32	0.021	0.53	8.00	SST	CG	N
0.25	6.350	10277	0.59	14.986	0.200	5.080	6.20	1.085	0.320	8.128	2.000	8.896	0.280	7.11	0.025	0.64	10.00	MW	C	Z
0.25	6.350	F-12	0.59	14.986	0.198	5.029	13.00	2.275	0.300	7.620	3.900	17.347	0.200	5.08	0.026	0.66	6.50	MW	C	Z
0.25	6.350	F-96	0.59	14.986	0.184	4.674	30.00	5.250	0.190	4.826	5.700	25.354	0.280	7.11	0.033	0.84	7.50	HD	C	Z
0.25	6.350	B14-58	0.59	14.986	0.180	4.572	27.00	4.725	0.240	6.096	6.400	28.467	0.350	8.89	0.035	0.89	10.00	SPR	CG	N
0.25	6.350	W-59	0.59	14.986	0.172	4.369	52.00	9.100	0.160	4.064	8.200	36.474	0.310	7.87	0.039	0.99	8.00	SST	CG	N
0.25	6.350	10756	0.59	14.986	0.170	4.318	76.00	13.300	0.130	3.302	9.500	42.256	0.290	7.37	0.040	1.02	7.25	SPR	CG	N
0.25	6.350	10959	0.63	16.002	0.222	5.639	0.99	0.173	0.470	11.938	0.470	2.091	0.100	2.54	0.014	0.36	5.75	SST	C	N
0.25	6.350	A-62	0.63	16.002	0.214	5.436	1.10	0.193	0.410	10.414	0.430	1.913	0.220	5.59	0.018	0.46	12.00	SST	CG	N
0.25	6.350	MM-96	0.63	16.002	0.214	5.436	3.50	0.613	0.410	10.414	1.400	6.227	0.120	3.05	0.018	0.46	5.50	MW	C	Z
0.25	6.350	BB-61	0.63	16.002	0.210	5.334	3.20	0.560	0.470	11.938	1.500	6.672	0.160	4.06	0.020	0.51	8.00	MW	CG	N
0.25	6.350	GG-47	0.63	16.002	0.210	5.334	4.20	0.735	0.300	7.620	1.300	5.782	0.120	3.05	0.020	0.51	6.00	SST	CG	N
0.25	6.350	A15-2	0.63	16.002	0.206	5.232	5.70	0.998	0.450	11.430	2.500	11.120	0.150	3.81	0.022	0.56	7.00	MW	CG	N
0.25	6.350	AA-30	0.63	16.002	0.206	5.232	3.30	0.578	0.390	9.906	1.300	5.782	0.230	5.84	0.022	0.56	9.50	SST	C	N
0.25	6.350	S-718	0.63	16.002	0.206	5.232	5.20	0.910	0.320	8.128	1.700	7.562	0.170	4.32	0.022	0.56	6.75	SST	C	N
0.25	6.350	O-60	0.63	16.002	0.200	5.080	5.40	0.945	0.350	8.890	1.900	8.451	0.280	7.11	0.025	0.64	10.00	SST	C	N
0.25	6.350	10383	0.63	16.002	0.194	4.928	12.00	2.100	0.370	9.398	4.300	19.126	0.250	6.35	0.028	0.71	9.00	MW	CG	N
0.25	6.350	W-5	0.63	16.002	0.194	4.928	12.00	2.100	0.280	7.112	3.300	14.678	0.220	5.59	0.028	0.71	8.00	SST	CG	N
0.25	6.350	1931	0.63	16.002	0.192	4.877	21.00	3.675	0.260	6.604	5.400	24.019	0.220	5.59	0.029	0.74	6.50	MW	C	Z
0.25	6.350	JJ-95	0.63	16.002	0.190	4.826	18.00	3.150	0.330	8.382	6.000	26.688	0.270	6.86	0.030	0.76	8.00	MW	C	N
0.25	6.350	F-10	0.63	16.002	0.186	4.724	24.00	4.200	0.210	5.334	5.200	23.130	0.290	7.37	0.032	0.81	8.00	HD	C	Z
0.25	6.350	PP-11	0.63	16.002	0.186	4.724	19.00	3.325	0.250	6.350	4.800	21.350	0.270	6.86	0.032	0.81	8.50	SST	CG	N
0.25	6.350	212	0.63	16.002	0.182	4.623	27.00	4.725	0.230	5.842	6.200	27.578	0.340	8.64	0.034	0.86	9.00	HD	C	Z
0.25	6.350	Y-10	0.63	16.002	0.176	4.470	56.00	9.800	0.140	3.556	7.600	33.805	0.260	6.60	0.037	0.94	7.00	SPR	CG	Z
0.25	6.350	A13-9	0.63	16.002	0.164	4.166	81.00	14.175	0.140	3.556	12.000	53.376	0.380	9.65	0.043	1.09	8.88	SPR	CG	N
0.25	6.350	10475	0.63	16.002	0.160	4.064	114.00	19.950	0.120	3.048	13.000	57.824	0.410	10.41	0.045	1.14	8.00	SPR	C	Z
0.25	6.350	N-8	0.66	16.764	0.202	5.131	7.50	1.313	0.440	11.176	3.300	14.678	0.180	4.57	0.024	0.61	7.50	MW	CG	Z
0.25	6.350	10554	0.66	16.764	0.196	4.978	7.90	1.383	0.340	8.636	2.700	12.010	0.320	8.13	0.027	0.69	10.80	MW	C	Z
0.25	6.350	935	0.66	16.764	0.188	4.775	21.00	3.675	0.310	7.874	6.600	29.357	0.280	7.11	0.031	0.79	8.00	MW	C	Z
0.25	6.350	2524	0.66	16.764	0.186	4.724	22.00	3.850	0.230	5.842	5.200	23.130	0.300	7.62	0.032	0.81	8.50	HD	C	Z
0.25	6.350	Z-56	0.66	16.764	0.186	4.724	14.00	2.450	0.300	7.620	4.400	19.571	0.350	8.89	0.032	0.81	11.00	SST	CG	N
0.25	6.350	A10-54	0.66	16.764	0.184	4.674	23.00	4.025	0.230	5.842	5.300	23.574	0.310	7.87	0.033	0.84	8.50	SST	C	N
0.25	6.350	EE-81	0.66	16.764	0.176	4.470	40.00	7.000	0.190	4.826	7.600	33.805	0.330	8.38	0.037	0.94	9.00	SPR	CG	N
0.25	6.350	W-49	0.66	16.764	0.176	4.470	54.00	9.450	0.130	3.302	7.100	31.581	0.240	6.10	0.037	0.94	6.50	SST	CG	N
0.25	6.350	S-317	0.69	17.526	0.220	5.588	0.54	0.095	0.510	12.954	0.270	1.201	0.180	4.57	0.015	0.38	11.00	SST	C	N
0.25	6.350	RR-46	0.69	17.526	0.210	5.334	3.30	0.578	0.390	9.906	1.300	5.782	0.160	4.06	0.020	0.51	7.00	SST	C	N
0.25	6.350	KK-98	0.69	17.526	0.206	5.232	3.10	0.543	0.450	11.430	1.400	6.227	0.240	6.10	0.022	0.56	10.00	SST	C	N
0.25	6.350	10609	0.69	17.526	0.202	5.131	6.40	1.120	0.340	8.636	2.200	9.786	0.210	5.33	0.024	0.61	7.75	SST	C	N
0.25	6.350	F-1	0.69	17.526	0.200	5.080	8.20	1.435	0.430	10.922	3.500	15.568	0.230	5.84	0.025	0.64	8.00	MW	C	Z
0.25	6.350	B1-44	0.69	17.526	0.198	5.029	8.30	1.453	0.320	8.128	2.600	11.565	0.210	5.33	0.026	0.66	8.25	SST	CG	N
0.25	6.350	HH-32	0.69	17.526	0.190	4.826	13.00	2.275	0.340	8.636	4.400	19.571	0.350	8.89	0.030	0.76	10.50	MW	C	Z
0.25	6.350	J-98	0.69	17.526	0.188	4.775	17.00	2.975	0.260	6.604	4.400	19.571	0.290	7.37	0.031	0.79	8.50	SST	C	N
0.25	6.350	J-49	0.69	17.526	0.186	4.724	21.00	3.675	0.350	8.890	7.200	32.026	0.320	8.13	0.032	0.81	9.00	MW	C	Z
0.25	6.350	B18-139	0.69	17.526	0.178	4.521	49.00	8.575	0.140	3.556	7.000	31.136	0.250	6.35	0.036	0.91	7.00	SPR	CG	Z
0.25	6.350	HH-94	0.69	17.526	0.174	4.420	36.00	6.300	0.210	5.334	7.700	34.250	0.360	9.14	0.038	0.97	9.50	SST	CG	N
0.25	6.350	AA-27	0.69	17.526	0.170	4.318	50.00	8.750	0.180	4.572	8.900	39.587	0.360	9.14	0.040	1.02	9.00	SST	CG	N
0.25	6.350	3584	0.69	17.526	0.166	4.216	66.00	11.550	0.230	5.842	15.000	66.720	0.400	10.16	0.042	1.07	9.50	MW	CG	GI
0.25	6.350	B1-4	0.69	17.526	0.164	4.166	74.00	12.950	0.160	4.064	12.000	53.376	0.410	10.41	0.043	1.09	9.50	SPR	CG	GI
0.25	6.350	V-22	0.72	18.288	0.212	5.385	3.00	0.525	0.540	13.716	1.600	7.117	0.150	3.81	0.019	0.48	7.00	MW	C	Z
0.25	6.350	B15-53	0.72	18.288	0.172	4.369	51.00	8.925	0.170	4.318	8.800	39.142	0.390	9.91	0.039	0.99	9.00	SPR	C	N
0.25	6.350	B3-46</td																		




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh							
0.25	6.350 LL-58	0.78	19.812	0.206	5.232	4.70	0.823	0.540	13.716	2.500	11.120	0.200	5.08	0.022	0.56	8.00	MW	C	N
0.25	6.350 F-26	0.78	19.812	0.192	4.877	9.30	1.628	0.390	9.906	3.600	16.013	0.320	8.13	0.029	0.74	11.00	SST	CG	N
0.25	6.350 12713	0.78	19.812	0.174	4.420	47.00	8.225	0.240	6.096	11.000	48.928	0.370	9.40	0.038	0.97	8.75	MW	CG	N
0.25	6.350 K-16	0.78	19.812	0.168	4.267	49.00	8.575	0.210	5.334	10.000	44.480	0.450	11.43	0.041	1.04	11.00	SPR	CG	N
0.25	6.350 S-60	0.81	20.574	0.230	5.842	0.10	0.018	0.690	17.526	0.070	0.311	0.120	3.05	0.010	0.25	11.00	SST	C	N
0.25	6.350 B-69	0.81	20.574	0.218	5.537	0.72	0.126	0.600	15.240	0.430	1.913	0.210	5.33	0.016	0.41	12.30	MW	C	N
0.25	6.350 A11-18	0.81	20.574	0.204	5.182	5.30	0.928	0.550	13.970	2.900	12.899	0.200	5.08	0.023	0.58	8.50	MW	CG	GI
0.25	6.350 B14-65	0.81	20.574	0.202	5.131	5.50	0.963	0.580	14.732	3.200	14.234	0.230	5.84	0.024	0.61	9.50	MW	CG	N
0.25	6.350 J-92	0.81	20.574	0.202	5.131	5.20	0.910	0.550	13.970	2.800	12.454	0.260	6.60	0.024	0.61	10.00	MW	C	Z
0.25	6.350 YY-14	0.81	20.574	0.196	4.978	8.60	1.505	0.510	12.954	4.400	19.571	0.300	7.62	0.027	0.69	10.00	MW	C	N
0.25	6.350 4289	0.81	20.574	0.194	4.928	8.10	1.418	0.480	12.192	3.800	16.902	0.340	8.64	0.028	0.71	12.00	MW	CG	Z
0.25	6.350 HH-5	0.81	20.574	0.186	4.724	14.00	2.450	0.330	8.382	4.800	21.350	0.340	8.64	0.032	0.81	10.80	SST	CG	N
0.25	6.350 F-8	0.81	20.574	0.184	4.674	20.00	3.500	0.290	7.366	5.700	25.354	0.380	9.65	0.033	0.84	10.50	SPR	C	Z
0.25	6.350 B-58	0.81	20.574	0.182	4.623	25.00	4.375	0.240	6.096	6.200	27.578	0.360	9.14	0.034	0.86	9.50	SPR	C	N
0.25	6.350 3866	0.81	20.574	0.172	4.369	35.00	6.125	0.250	6.350	8.800	39.142	0.470	11.94	0.039	0.99	12.00	SPR	CG	Z
0.25	6.350 A11-24	0.81	20.574	0.172	4.369	39.00	6.825	0.220	5.588	8.800	39.142	0.430	10.92	0.039	0.99	11.00	SPR	CG	N
0.25	6.350 AA-99	0.81	20.574	0.156	3.962	93.00	16.275	0.160	4.064	15.000	66.720	0.520	13.21	0.047	1.19	11.00	SPR	CG	GI
0.25	6.350 S-486	0.81	20.574	0.124	3.150	376.00	65.800	0.077	1.956	29.000	128.992	0.606	15.39	0.063	1.59	9.70	SST	CG	N
0.25	6.350 J-23	0.84	21.336	0.198	5.029	7.30	1.278	0.540	13.716	3.900	17.347	0.260	6.60	0.026	0.66	10.00	MW	CG	Z
0.25	6.350 F-40	0.84	21.336	0.186	4.724	17.00	2.975	0.310	7.874	5.200	23.130	0.380	9.65	0.032	0.81	10.80	HD	C	Z
0.25	6.350 S-1313	0.88	22.352	0.224	5.690	0.38	0.067	0.750	19.050	0.290	1.290	0.130	3.30	0.013	0.33	9.00	SST	C	N
0.25	6.350 AA-21	0.88	22.352	0.220	5.588	0.81	0.142	0.670	17.018	0.540	2.402	0.140	3.56	0.015	0.38	8.00	SST	C	N
0.25	6.350 W-62	0.88	22.352	0.200	5.080	4.80	0.840	0.490	12.446	2.300	10.230	0.280	7.11	0.025	0.64	11.00	SST	CG	N
0.25	6.350 2948	0.88	22.352	0.198	5.029	6.70	1.173	0.590	14.986	3.900	17.347	0.280	7.11	0.026	0.66	10.80	MW	CG	Z
0.25	6.350 F-91	0.88	22.352	0.198	5.029	7.30	1.278	0.540	13.716	3.900	17.347	0.290	7.37	0.026	0.66	10.00	MW	C	Z
0.25	6.350 A13-3	0.88	22.352	0.196	4.978	7.40	1.295	0.400	10.160	2.900	12.899	0.280	7.11	0.027	0.69	10.30	SST	CG	N
0.25	6.350 FF-98	0.88	22.352	0.194	4.928	12.00	2.100	0.420	10.668	4.900	21.795	0.280	7.11	0.028	0.71	9.00	MW	C	Z
0.25	6.350 00-4	0.88	22.352	0.190	4.826	12.00	2.100	0.520	13.208	6.000	26.688	0.350	8.89	0.030	0.76	11.50	MW	CG	GI
0.25	6.350 S-721	0.88	22.352	0.186	4.724	14.00	2.450	0.350	8.890	4.800	21.350	0.390	9.91	0.032	0.81	11.30	SST	C	N
0.25	6.350 927	0.88	22.352	0.182	4.623	21.00	3.675	0.290	7.366	6.200	27.578	0.370	9.40	0.034	0.86	11.00	HD	CG	Z
0.25	6.350 10285	0.88	22.352	0.180	4.572	25.00	4.375	0.260	6.604	6.400	28.467	0.410	10.41	0.035	0.89	10.80	SPR	C	Z
0.25	6.350 B7-27	0.88	22.352	0.180	4.572	23.00	4.025	0.280	7.112	6.400	28.467	0.400	10.16	0.035	0.89	11.50	SPR	CG	N
0.25	6.350 928	0.88	22.352	0.168	4.267	49.00	8.575	0.210	5.334	10.000	44.480	0.490	12.45	0.041	1.04	11.00	HD	C	Z
0.25	6.350 S-723	0.88	22.352	0.166	4.216	43.00	7.525	0.240	6.096	10.000	44.480	0.550	13.97	0.042	1.07	12.00	SST	C	N
0.25	6.350 3874	0.88	22.352	0.114	2.896	850.00	148.750	0.050	1.270	39.000	173.472	0.540	13.72	0.068	1.73	8.00	SPR	CG	Z
0.25	6.350 B14-11	0.91	23.114	0.184	4.674	49.00	8.575	0.110	2.794	5.300	23.574	0.200	5.08	0.033	0.84	5.00	SST	C	N
0.25	6.350 10412	0.91	23.114	0.174	4.420	33.00	5.775	0.250	6.350	8.200	36.474	0.440	11.18	0.038	0.97	11.50	SPR	CG	Z
0.25	6.350 11899	0.91	23.114	0.160	4.064	76.00	13.300	0.170	4.318	13.000	57.824	0.540	13.72	0.045	1.14	11.00	SPR	C	N
0.25	6.350 10149	0.94	23.876	0.210	5.334	1.70	0.298	0.650	16.510	1.100	4.893	0.290	7.37	0.020	0.51	13.30	MW	C	Z
0.25	6.350 0-314	0.94	23.876	0.202	5.131	4.40	0.770	0.640	16.256	2.800	12.454	0.300	7.62	0.024	0.61	11.30	MW	C	Z
0.25	6.350 KK-43	0.94	23.876	0.198	5.029	6.50	1.138	0.600	15.240	3.900	17.347	0.310	7.87	0.026	0.66	11.00	MW	C	N
0.25	6.350 B5-65	0.94	23.876	0.196	4.978	6.30	1.103	0.560	14.224	3.500	15.568	0.380	9.65	0.027	0.69	13.00	MW	C	N
0.25	6.350 FF-89	0.94	23.876	0.190	4.826	9.90	1.733	0.520	13.208	5.100	22.685	0.420	10.67	0.030	0.76	13.00	MW	CG	Z
0.25	6.350 L-84	0.94	23.876	0.190	4.826	11.00	1.925	0.550	13.970	6.000	26.688	0.390	9.91	0.030	0.76	12.00	MW	CG	Z
0.25	6.350 F-39	0.94	23.876	0.186	4.724	15.00	2.625	0.360	9.144	5.200	23.130	0.420	10.67	0.032	0.81	12.00	SPR	C	Z
0.25	6.350 FF-50	0.94	23.876	0.180	4.572	20.00	3.500	0.300	7.620	6.000	26.688	0.390	9.91	0.035	0.89	11.30	SST	CG	N
0.25	6.350 2833	0.94	23.876	0.160	4.064	71.00	12.425	0.260	6.604	18.000	80.064	0.520	13.21	0.045	1.14	11.60	MW	CG	Z
0.25	6.350 S-930	0.94	23.876	0.158	4.013	73.00	12.775	0.180	4.572	13.000	57.824	0.550	13.97	0.046	1.17	11.00	SST	C	N
0.25	6.350 B-47	0.94	23.876	0.150	3.810	103.00	18.025	0.150	3.810	16.000	71.168	0.580	14.73	0.050	1.27	11.50	SST	CG	N
0.25	6.350 3519	0.94	23.876	0.138	3.505	176.00	30.800	0.180	4.572	32.000	142.336	0.730	18.54	0.056	1.42	13.00	MW	CG	Z
0.25	6.350 DD-43	0.97	24.638	0.210	5.334	1.70	0.298	0.710	18.034	1.200	5.338	0.260	6.60	0.020	0.51	12.00	SST	C	N
0.25	6.350 3115	1.00	25.400	0.214	5.436	1.30	0.228	0.780	19.812	0.990	4.404	0.230	5.84	0.018	0.46	11.50	MW	CG	GI
0.25	6.350 W-47	1.00	25.400	0.214	5.436	1.20	0.210	0.780	19.812	0.920	4.092	0.220	5.59	0.018	0.46	11.00	SST	C	N
0.25	6.350 3811	1.00	25.400	0.210	5.334	2.40	0.420	0.780	19.812	1.800	8.006	0.220	5.59	0.020	0.51	10.00	MW	C	GI
0.25	6.350 151-A	1.00	25.400	0.210	5.334	2.80	0.490	0.680	17.272	1.900	8.451	0.200	5.08	0.020	0.51</td				




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
0.25	6.350	A10-25	1.03	26.162	0.214	5.436	0.56	0.098	0.640	16.256	0.360	1.601	0.400	10.16	0.018	0.46	21.00	SST	C	N
0.25	6.350	10179	1.03	26.162	0.202	5.131	4.60	0.805	0.520	13.208	2.400	10.675	0.260	6.60	0.024	0.61	11.00	HD	CG	N
0.25	6.350	S-999	1.03	26.162	0.188	4.775	12.00	2.100	0.360	9.144	4.400	19.571	0.340	8.64	0.031	0.79	11.00	SST	CG	N
0.25	6.350	2621	1.03	26.162	0.172	4.369	25.00	4.375	0.350	8.890	8.800	39.142	0.660	16.76	0.039	0.99	16.00	HD	C	Z
0.25	6.350	A15-15	1.05	26.670	0.170	4.318	30.00	5.250	0.300	7.620	8.900	39.587	0.590	14.99	0.040	1.02	13.80	SST	C	N
0.25	6.350	YY-3	1.06	26.924	0.210	5.334	2.10	0.368	0.620	15.748	1.300	5.782	0.220	5.59	0.020	0.51	10.00	SST	C	N
0.25	6.350	11468	1.06	26.924	0.204	5.182	3.50	0.613	0.550	13.970	1.900	8.451	0.270	6.86	0.023	0.58	10.80	SST	C	N
0.25	6.350	TT-19	1.06	26.924	0.204	5.182	2.50	0.438	0.720	18.288	1.800	8.006	0.340	8.64	0.023	0.58	13.80	SST	C	N
0.25	6.350	WW-33	1.06	26.924	0.202	5.131	3.80	0.665	0.730	18.542	2.700	12.010	0.340	8.64	0.024	0.61	13.00	MW	C	N
0.25	6.350	HH-65	1.06	26.924	0.186	4.724	13.00	2.275	0.390	9.906	5.200	23.130	0.420	10.67	0.032	0.81	13.00	SPR	CG	N
0.25	6.350	F-21	1.06	26.924	0.184	4.674	16.00	2.800	0.370	9.398	5.700	25.354	0.450	11.43	0.033	0.84	12.80	SPR	C	Z
0.25	6.350	F-31	1.06	26.924	0.156	3.962	88.00	15.400	0.170	4.318	15.000	66.720	0.540	13.72	0.047	1.19	11.50	SPR	CG	Z
0.25	6.350	12407	1.09	27.686	0.224	5.690	0.19	0.033	0.850	21.590	0.160	0.712	0.250	6.35	0.013	0.33	18.00	MW	C	N
0.25	6.350	3274	1.09	27.686	0.174	4.420	26.00	4.550	0.310	7.874	8.200	36.474	0.530	13.46	0.038	0.97	14.00	SPR	CG	Z
0.25	6.350	AA-35	1.13	28.702	0.230	5.842	0.04	0.007	0.850	21.590	0.030	0.133	0.280	7.11	0.010	0.25	27.00	SST	C	N
0.25	6.350	S-197	1.13	28.702	0.222	5.639	0.23	0.040	0.860	21.844	0.200	0.890	0.260	6.60	0.014	0.36	17.80	SST	C	N
0.25	6.350	2834	1.13	28.702	0.216	5.486	1.00	0.175	0.910	23.114	0.910	4.048	0.210	5.33	0.017	0.43	11.50	MW	C	Z
0.25	6.350	2877	1.13	28.702	0.216	5.486	0.45	0.079	0.720	18.288	0.320	1.423	0.410	10.41	0.017	0.43	23.00	MW	C	Z
0.25	6.350	4288	1.13	28.702	0.216	5.486	0.50	0.088	0.750	19.050	0.380	1.690	0.370	9.40	0.017	0.43	21.00	MW	C	Z
0.25	6.350	II-5	1.13	28.702	0.210	5.334	1.50	0.263	0.810	20.574	1.200	5.338	0.320	8.13	0.020	0.51	15.00	MW	C	Z
0.25	6.350	1890	1.13	28.702	0.200	5.080	4.50	0.788	0.780	19.812	3.500	15.568	0.350	8.89	0.025	0.64	13.00	MW	C	Z
0.25	6.350	3561	1.13	28.702	0.198	5.029	6.90	1.208	0.570	14.478	3.900	17.347	0.300	7.62	0.026	0.66	10.50	MW	C	Z
0.25	6.350	DD-8	1.13	28.702	0.190	4.826	6.50	1.138	0.590	14.986	3.800	16.902	0.540	13.72	0.030	0.76	17.00	SST	C	N
0.25	6.350	S-1156	1.13	28.702	0.186	4.724	13.00	2.275	0.380	9.652	4.800	21.350	0.420	10.67	0.032	0.81	12.00	SST	CG	N
0.25	6.350	S-975	1.13	28.702	0.180	4.572	16.00	2.800	0.380	9.652	6.000	26.688	0.480	12.19	0.035	0.89	13.80	SST	CG	N
0.25	6.350	YY-17	1.13	28.702	0.178	4.521	18.00	3.150	0.370	9.398	6.500	28.912	0.500	12.70	0.036	0.91	14.00	SST	CG	N
0.25	6.350	A14-39	1.13	28.702	0.174	4.420	24.00	4.200	0.340	8.636	8.200	36.474	0.580	14.73	0.038	0.97	15.30	SPR	CG	N
0.25	6.350	EE-34	1.13	28.702	0.150	3.810	93.00	16.275	0.170	4.318	16.000	71.168	0.640	16.26	0.050	1.27	12.80	SST	CG	N
0.25	6.350	HH-55	1.16	29.464	0.214	5.436	0.58	0.102	0.780	19.812	0.450	2.002	0.380	9.65	0.018	0.46	20.00	SST	C	N
0.25	6.350	LL-70	1.16	29.464	0.190	4.826	9.90	1.733	0.600	15.240	6.000	26.688	0.390	9.91	0.030	0.76	13.00	MW	CG	N
0.25	6.350	S-322	1.16	29.464	0.156	3.962	66.00	11.550	0.210	5.334	14.000	62.272	0.610	15.49	0.047	1.19	13.00	SST	CG	N
0.25	6.350	O-102	1.19	30.226	0.212	5.385	0.89	0.156	0.810	20.574	0.720	3.203	0.380	9.65	0.019	0.48	19.00	MW	C	Z
0.25	6.350	BB-30	1.19	30.226	0.170	4.318	27.00	4.725	0.330	8.382	8.900	39.587	0.600	15.24	0.040	1.02	15.00	SST	CG	N
0.25	6.350	L-30	1.23	31.242	0.150	3.810	140.00	24.500	0.120	3.048	17.000	75.616	0.500	12.70	0.050	1.27	10.00	SPR	CG	Z
0.25	6.350	CC-87	1.25	31.750	0.226	5.740	0.18	0.032	1.100	27.940	0.190	0.845	0.190	4.83	0.012	0.30	14.50	MW	C	N
0.25	6.350	B2-39	1.25	31.750	0.210	5.334	1.60	0.280	0.950	24.130	1.500	6.672	0.300	7.62	0.020	0.51	14.00	MW	C	N
0.25	6.350	7	1.25	31.750	0.204	5.182	3.00	0.525	0.700	17.780	2.100	9.341	0.330	8.38	0.023	0.58	13.50	HD	C	Z
0.25	6.350	S-138	1.25	31.750	0.202	5.131	2.60	0.455	0.840	21.336	2.200	9.786	0.410	10.41	0.024	0.61	16.00	SST	C	N
0.25	6.350	Y-81	1.25	31.750	0.202	5.131	3.20	0.560	0.870	22.098	2.800	12.454	0.380	9.65	0.024	0.61	15.00	MW	C	N
0.25	6.350	F-14	1.25	31.750	0.198	5.029	4.90	0.858	0.810	20.574	3.900	17.347	0.390	9.91	0.026	0.66	14.00	MW	C	Z
0.25	6.350	CC-4	1.25	31.750	0.190	4.826	4.80	0.840	0.500	12.700	2.400	10.675	0.750	19.05	0.030	0.76	25.00	MW	CG	N
0.25	6.350	A14-3	1.25	31.750	0.170	4.318	27.00	4.725	0.350	8.890	9.500	42.256	0.660	16.76	0.040	1.02	16.50	SPR	CG	N
0.25	6.350	S-725	1.25	31.750	0.166	4.216	29.00	5.075	0.350	8.890	10.000	44.480	0.760	19.30	0.042	1.07	17.00	SST	C	N
0.25	6.350	B10-6	1.25	31.750	0.162	4.115	39.00	6.825	0.320	8.128	12.000	53.376	0.790	20.07	0.044	1.12	18.00	SPR	CG	N
0.25	6.350	CC-57	1.28	32.512	0.190	4.826	9.90	1.733	0.600	15.240	6.000	26.688	0.390	9.91	0.030	0.76	13.00	MW	CG	Z
0.25	6.350	4296	1.31	33.274	0.182	4.623	14.00	2.450	0.440	11.176	6.200	27.578	0.560	14.22	0.034	0.86	15.50	SPR	C	Z
0.25	6.350	M-148	1.31	33.274	0.166	4.216	36.00	6.300	0.310	7.874	11.000	48.928	0.670	17.02	0.042	1.07	16.00	SPR	CG	Z
0.25	6.350	S-331	1.34	34.036	0.214	5.436	1.10	0.193	0.870	22.098	0.930	4.137	0.230	5.84	0.018	0.46	12.00	SST	C	N
0.25	6.350	151-B	1.38	35.052	0.210	5.334	2.00	0.350	0.960	24.384	1.900	8.451	0.250	6.35	0.020	0.51	11.50	MW	C	Z
0.25	6.350	3780	1.38	35.052	0.194	4.928	6.00	1.050	0.820	20.828	4.900	21.795	0.460	11.68	0.028	0.71	15.50	MW	C	Z
0.25	6.350	J-47	1.38	35.052	0.190	4.826	5.00	0.875	0.660	16.764	3.300	14.678	0.720	18.29	0.030	0.76	24.00	MW	CG	Z
0.25	6.350	PP-99	1.38	35.052	0.190	4.826	11.00	1.925	0.380	9.652	4.000	17.792	0.360	9.14	0.030	0.76	11.00	SST	C	N
0.25	6.350	201-B	1.38	35.052	0.180	4.572	15.00	2.625	0.600	15.240	8.900	39.587	0.610	15.49	0.035	0.89	16.50	MW	C	Z
0.25	6.350	II-66	1.38	35.052	0.170	4.318	27.00	4.725	0.350	8.890	9.500	42.256	0.700	17.78	0					




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h								
0.25	6.350	B2-4	1.75	44.450	0.200	5.080	4.70	0.823	0.740	18.796	3.500	15.568	0.340	8.64	0.025	0.64	12.50	MW	C	N
0.25	6.350	11349	1.75	44.450	0.190	4.826	3.30	0.578	0.810	20.574	2.600	11.565	0.950	24.13	0.030	0.76	31.50	SST	CG	N
0.25	6.350	J-61	1.75	44.450	0.182	4.623	8.70	1.523	0.710	18.034	6.200	27.578	0.820	20.83	0.034	0.86	24.00	SPR	C	Z
0.25	6.350	201-C	1.75	44.450	0.180	4.572	12.00	2.100	0.770	19.558	8.900	39.587	0.760	19.30	0.035	0.89	20.80	MW	C	Z
0.25	6.350	A12-18	1.78	45.212	0.200	5.080	2.30	0.403	1.200	30.480	2.700	12.010	0.610	15.49	0.025	0.64	23.50	MW	C	N
0.25	6.350	1941	1.78	45.212	0.182	4.623	10.00	1.750	0.600	15.240	6.200	27.578	0.730	18.54	0.034	0.86	20.50	SPR	C	Z
0.25	6.350	2746	1.78	45.212	0.176	4.470	15.00	2.625	0.680	17.272	10.000	44.480	0.780	19.81	0.037	0.94	20.00	MW	C	Z
0.25	6.350	10937	1.78	45.212	0.170	4.318	19.00	3.325	0.510	12.954	9.500	42.256	0.930	23.62	0.040	1.02	23.30	SPR	CG	N
0.25	6.350	3005	1.81	45.974	0.174	4.420	17.00	2.975	0.470	11.938	8.200	36.474	0.810	20.57	0.038	0.97	20.30	SPR	C	Z
0.25	6.350	11109	1.88	47.752	0.210	5.334	1.10	0.193	1.500	38.100	1.500	6.672	0.420	10.67	0.020	0.51	20.00	MW	C	Z
0.25	6.350	F-61	1.94	49.276	0.142	3.607	83.00	14.525	0.250	6.350	21.000	93.408	1.160	29.46	0.054	1.37	21.50	SPR	CG	G
0.25	6.350	3730	2.00	50.800	0.216	5.486	0.68	0.119	1.700	43.180	1.200	5.338	0.290	7.37	0.017	0.43	16.00	MW	C	GI
0.25	6.350	2566	2.00	50.800	0.214	5.436	0.55	0.096	1.600	40.640	0.850	3.781	0.450	11.43	0.018	0.46	24.00	MW	C	Z
0.25	6.350	B2-45	2.00	50.800	0.206	5.232	2.30	0.403	1.100	27.940	2.500	11.120	0.340	8.64	0.022	0.56	14.50	MW	C	Z
0.25	6.350	4251	2.00	50.800	0.200	5.080	1.90	0.333	1.300	33.020	2.400	10.675	0.730	18.54	0.025	0.64	28.00	MW	C	Z
0.25	6.350	10191	2.00	50.800	0.200	5.080	2.70	0.473	1.300	33.020	3.500	15.568	0.530	13.46	0.025	0.64	20.00	MW	C	Z
0.25	6.350	3511	2.00	50.800	0.198	5.029	2.70	0.473	1.400	35.560	3.600	16.013	0.650	16.51	0.026	0.66	24.00	MW	C	Z
0.25	6.350	A14-35	2.00	50.800	0.178	4.521	11.00	1.925	0.640	16.256	7.000	31.136	0.890	22.61	0.036	0.91	24.80	SPR	CG	N
0.25	6.350	L-60	2.02	51.308	0.170	4.318	17.00	2.975	0.570	14.478	9.500	42.256	1.040	26.42	0.040	1.02	26.00	SPR	CG	Z
0.25	6.350	S-3183	2.13	54.102	0.168	4.267	14.00	2.450	0.700	17.780	9.500	42.256	1.250	31.75	0.041	1.04	30.50	SST	CG	N
0.25	6.350	10430	2.22	56.388	0.180	4.572	16.00	2.800	0.420	10.668	6.400	28.467	0.600	15.24	0.035	0.89	16.00	SPR	C	Z
0.25	6.350	F-99	2.25	57.150	0.192	4.877	3.10	0.543	1.300	33.020	4.100	18.237	0.960	24.38	0.029	0.74	32.00	MW	C	Z
0.25	6.350	O-43	2.34	59.436	0.192	4.877	4.30	0.753	1.300	33.020	5.400	24.019	0.730	18.54	0.029	0.74	24.00	MW	C	N
0.25	6.350	B10-41	2.38	60.452	0.200	5.080	3.80	0.665	0.920	23.368	3.500	15.568	0.400	10.16	0.025	0.64	15.00	MW	C	Z
0.25	6.350	4119	2.50	63.500	0.190	4.826	4.70	0.823	1.300	33.020	6.000	26.688	0.800	20.32	0.030	0.76	25.50	MW	C	Z
0.25	6.350	O-56	2.66	67.564	0.170	4.318	12.00	2.100	0.770	19.558	9.500	42.256	1.380	35.05	0.040	1.02	34.50	SPR	CG	BO
0.25	6.350	O-55	2.69	68.326	0.202	5.131	2.00	0.350	1.700	43.180	3.300	14.678	0.570	14.48	0.024	0.61	22.80	MW	C	Z
0.25	6.350	A-79	2.75	69.850	0.194	4.928	4.00	0.700	1.200	30.480	4.900	21.795	0.640	16.26	0.028	0.71	22.00	MW	C	N
0.25	6.350	LL-17	2.78	70.612	0.190	4.826	2.60	0.455	1.400	35.560	3.700	16.458	1.350	34.29	0.030	0.76	44.00	MW	C	N
0.25	6.350	W-55	3.00	76.200	0.166	4.216	17.00	2.975	0.660	16.764	11.000	48.928	1.390	35.31	0.042	1.07	32.00	SPR	C	Z
0.25	6.350	11477	3.03	76.962	0.160	4.064	22.00	3.850	0.600	15.240	13.000	57.824	1.530	38.86	0.045	1.14	33.00	SPR	CG	Z
0.25	6.350	12743	3.13	79.502	0.178	4.521	5.60	0.980	1.200	30.480	7.000	31.136	1.690	42.93	0.036	0.91	46.00	SPR	C	N
0.25	6.350	12505	3.38	85.852	0.170	4.318	9.50	1.663	1.000	25.400	9.500	42.256	1.800	45.72	0.040	1.02	44.00	SPR	C	N
0.25	6.350	S-1001	3.75	95.250	0.198	5.029	0.91	0.159	2.200	55.880	2.000	8.896	1.530	38.86	0.026	0.66	58.00	SST	C	N
0.25	6.350	S-1504	4.00	101.600	0.200	5.080	0.73	0.128	2.500	63.500	1.800	8.006	1.550	39.37	0.025	0.64	61.00	SST	C	N
0.25	6.350	2822	4.75	120.650	0.170	4.318	6.30	1.103	1.500	38.100	9.500	42.256	2.600	66.04	0.040	1.02	65.00	SPR	CG	GI
0.25	6.350	3946	4.88	123.952	0.180	4.572	3.40	0.595	1.900	48.260	6.400	28.467	2.310	58.67	0.035	0.89	66.00	SPR	CG	GI
0.25	6.350	B10-55	4.88	123.952	0.174	4.420	4.80	0.840	1.700	43.180	8.200	36.474	2.550	64.77	0.038	0.97	67.00	SPR	CG	Z
0.25	6.350	12708	6.50	165.100	0.178	4.521	2.50	0.438	2.900	73.660	7.200	32.026	3.640	92.46	0.036	0.91	100.00	MW	C	N
0.262	6.655	12798	0.86	21.844	0.166	4.216	80.00	14.000	0.270	6.858	21.000	93.408	0.560	14.22	0.048	1.22	11.80	MW	CG	N
0.266	6.756	W-46	0.19	4.826	0.232	5.893	5.20	0.910	0.110	2.794	0.590	2.624	0.080	2.03	0.017	0.43	3.50	MW	C	Z
0.266	6.756	J-77	0.22	5.588	0.176	4.470	277.00	48.475	0.040	1.016	11.000	48.928	0.180	4.57	0.045	1.14	4.00	SPR	CG	N
0.266	6.756	EE-27	0.28	7.112	0.236	5.994	1.40	0.245	0.190	4.826	0.260	1.156	0.090	2.29	0.015	0.38	5.00	SST	C	N
0.266	6.756	B-53	0.31	7.874	0.246	6.248	0.17	0.030	0.230	5.842	0.040	0.178	0.080	2.03	0.010	0.25	7.00	MW	C	N
0.266	6.756	CC-52	0.31	7.874	0.220	5.588	10.00	1.750	0.180	4.572	1.900	8.451	0.130	3.30	0.023	0.58	4.75	MW	C	N
0.266	6.756	O-27	0.31	7.874	0.206	5.232	45.00	7.875	0.130	3.302	5.600	24.909	0.150	3.81	0.030	0.76	4.00	MW	C	N
0.266	6.756	S-1389	0.31	7.874	0.206	5.232	31.00	5.425	0.120	3.048	3.800	16.902	0.170	4.32	0.030	0.76	4.50	SST	C	N
0.266	6.756	I-84	0.31	7.874	0.196	4.978	59.00	10.325	0.100	2.540	6.100	27.133	0.180	4.57	0.035	0.89	5.00	SPR	CG	Z
0.266	6.756	U-72	0.34	8.636	0.206	5.232	30.00	5.250	0.190	4.826	5.600	24.909	0.150	3.81	0.030	0.76	5.00	MW	CG	N
0.266	6.756	EE-26	0.38	9.652	0.214	5.436	8.40	1.470	0.190	4.826	1.600	7.117	0.180	4.57	0.026	0.66	7.00	SST	CG	N
0.266	6.756	Y-5	0.38	9.652	0.210	5.334	19.00	3.325	0.160	4.064	3.100	13.789	0.140	3.56	0.028	0.71	5.00	SST	CG	N
0.266	6.756	S-1112	0.38	9.652	0.202	5.131	35.00	6.125	0.130	3.302	4.600	20.461	0.160	4.06	0.032	0.81	5.00	SST	CG	N
0.266	6.756	S-815	0.38	9.652	0.160	4.064	345.00	60.375	0.050	1.270	18.000	80.064	0.270	6.86	0.053	1.35	5.00	SST	CG	N
0.266	6.756	B-238	0.39	9.906	0.210	5.334	22.00	3.850	0.210	5.334	4.600									




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.266	6.756	N-62	0.53	13.462	0.196	4.978	30.00	5.250	0.210	5.334	6.100	27.133	0.280	7.11	0.035	0.89	8.00	SPR CG N
0.266	6.756	B-53	0.53	13.462	0.180	4.572	95.00	16.625	0.120	3.048	11.000	48.928	0.290	7.37	0.043	1.09	6.75	SPR CG Z
0.266	6.756	A-73	0.56	14.224	0.238	6.045	0.87	0.152	0.460	11.684	0.410	1.824	0.100	2.54	0.014	0.36	6.00	MW C GI
0.266	6.756	JJ-45	0.56	14.224	0.210	5.334	8.20	1.435	0.280	7.112	2.300	10.230	0.280	7.11	0.028	0.71	9.00	SST C N
0.266	6.756	JJ-91	0.56	14.224	0.210	5.334	9.50	1.663	0.280	7.112	2.700	12.010	0.280	7.11	0.028	0.71	9.00	MW C N
0.266	6.756	3713	0.56	14.224	0.202	5.131	24.00	4.200	0.290	7.366	6.800	30.246	0.220	5.59	0.032	0.81	7.00	MW CG Z
0.266	6.756	A11-60	0.56	14.224	0.202	5.131	17.00	2.975	0.270	6.858	4.600	20.461	0.270	6.86	0.032	0.81	8.33	SST CG N
0.266	6.756	L-85	0.56	14.224	0.192	4.877	41.00	7.175	0.170	4.318	7.200	32.026	0.280	7.11	0.037	0.94	7.50	SPR CG Z
0.266	6.756	B11-33	0.59	14.986	0.230	5.842	0.82	0.144	0.340	8.636	0.280	1.245	0.250	6.35	0.018	0.46	14.00	MW CG N
0.266	6.756	A10-35	0.59	14.986	0.204	5.182	20.00	3.500	0.200	5.080	4.200	18.682	0.230	5.84	0.031	0.79	6.50	SST C N
0.266	6.756	O-143	0.59	14.986	0.186	4.724	70.00	12.250	0.120	3.048	8.400	37.363	0.280	7.11	0.040	1.02	6.00	SST C N
0.266	6.756	II-99	0.59	14.986	0.172	4.369	150.00	26.250	0.090	2.286	13.000	57.824	0.280	7.11	0.047	1.19	6.00	SST CG N
0.266	6.756	H-27	0.63	16.002	0.208	5.283	13.00	2.275	0.390	9.906	5.100	22.685	0.230	5.84	0.029	0.74	8.00	MW CG N
0.266	6.756	S-156	0.63	16.002	0.204	5.182	30.00	5.250	0.140	3.556	4.200	18.682	0.190	4.83	0.031	0.79	5.00	SST C N
0.266	6.756	B8-34	0.66	16.764	0.212	5.385	9.00	1.575	0.310	7.874	2.800	12.454	0.200	5.08	0.027	0.69	7.50	SST CG N
0.266	6.756	3568	0.66	16.764	0.208	5.283	13.00	2.275	0.400	10.160	5.100	22.685	0.260	6.60	0.029	0.74	8.00	MW CG Z
0.266	6.756	UU-37	0.66	16.764	0.186	4.724	35.00	6.125	0.240	6.096	8.400	37.363	0.400	10.16	0.040	1.02	10.00	SST CG N
0.266	6.756	N-12	0.69	17.526	0.248	6.299	0.05	0.009	0.570	14.478	0.030	0.133	0.110	2.79	0.009	0.23	11.80	SST C N
0.266	6.756	A13-51	0.69	17.526	0.238	6.045	0.25	0.044	0.450	11.430	0.110	0.489	0.240	6.10	0.014	0.36	16.00	SPR C N
0.266	6.756	II-88	0.69	17.526	0.216	5.486	3.50	0.613	0.360	9.144	1.300	5.782	0.330	8.38	0.025	0.64	12.00	SST C N
0.266	6.756	B11-52	0.69	17.526	0.208	5.283	13.00	2.275	0.400	10.160	5.100	22.685	0.230	5.84	0.029	0.74	8.00	MW CG N
0.266	6.756	10897	0.69	17.526	0.184	4.674	61.00	10.675	0.150	3.810	9.000	40.032	0.300	7.62	0.041	1.04	7.25	SST CG N
0.266	6.756	A9-64	0.69	17.526	0.180	4.572	72.00	12.600	0.140	3.556	10.000	44.480	0.320	8.13	0.043	1.09	7.50	SST CG N
0.266	6.756	L-90	0.69	17.526	0.168	4.267	127.00	22.225	0.130	3.302	16.000	71.168	0.420	10.67	0.049	1.24	8.50	SPR CG GI
0.266	6.756	HH-71	0.72	18.288	0.184	4.674	40.00	7.000	0.240	6.096	9.600	42.701	0.450	11.43	0.041	1.04	11.00	SPR CG GI
0.266	6.756	3104	0.75	19.050	0.238	6.045	0.58	0.102	0.620	15.748	0.360	1.601	0.130	3.30	0.014	0.36	8.00	MW C Z
0.266	6.756	A-50	0.75	19.050	0.236	5.994	0.29	0.051	0.470	11.938	0.140	0.623	0.290	7.37	0.015	0.38	18.00	MW C Z
0.266	6.756	A-28	0.75	19.050	0.226	5.740	1.30	0.228	0.490	12.446	0.640	2.847	0.270	6.86	0.020	0.51	12.30	SST C N
0.266	6.756	A-72	0.75	19.050	0.216	5.486	5.10	0.893	0.500	12.700	2.500	11.120	0.250	6.35	0.025	0.64	10.00	MW CG Z
0.266	6.756	4292	0.75	19.050	0.212	5.385	5.20	0.910	0.400	10.160	2.100	9.341	0.350	8.89	0.027	0.69	13.00	MW CG Z
0.266	6.756	Y-76	0.75	19.050	0.206	5.232	9.80	1.715	0.390	9.906	3.800	16.902	0.300	7.62	0.030	0.76	10.00	SST CG N
0.266	6.756	A15-22	0.75	19.050	0.202	5.131	12.00	2.100	0.390	9.906	4.600	20.461	0.350	8.89	0.032	0.81	11.00	SST CG N
0.266	6.756	S-211	0.75	19.050	0.196	4.978	17.00	2.975	0.330	8.382	5.700	25.354	0.390	9.91	0.035	0.89	11.00	SST CG N
0.266	6.756	FF-28	0.81	20.574	0.222	5.639	3.40	0.595	0.590	14.986	2.000	8.896	0.220	5.59	0.022	0.56	9.00	MW CG Z
0.266	6.756	Q-66	0.81	20.574	0.220	5.588	6.20	1.085	0.290	7.366	1.800	8.006	0.160	4.06	0.023	0.58	6.00	SST C N
0.266	6.756	S-907	0.81	20.574	0.198	5.029	19.00	3.325	0.280	7.112	5.400	24.019	0.310	7.87	0.034	0.86	9.00	SST CG N
0.266	6.756	LL-46	0.84	21.336	0.222	5.639	2.20	0.385	0.570	14.478	1.300	5.782	0.270	6.86	0.022	0.56	11.30	SST C N
0.266	6.756	N-128	0.84	21.336	0.206	5.232	20.00	3.500	0.290	7.366	5.600	24.909	0.230	5.84	0.030	0.76	6.50	MW C Z
0.266	6.756	VV-17	0.88	22.352	0.236	5.994	0.31	0.054	0.640	16.256	0.200	0.890	0.240	6.10	0.015	0.38	15.00	SST C N
0.266	6.756	Y-72	0.88	22.352	0.196	4.978	22.00	3.850	0.270	6.858	6.100	27.133	0.390	9.91	0.035	0.89	10.00	SPR C N
0.266	6.756	S-1585	0.88	22.352	0.184	4.674	29.00	5.075	0.310	7.874	9.000	40.032	0.530	13.46	0.041	1.04	13.00	SST CG N
0.266	6.756	XX-67	0.88	22.352	0.180	4.572	37.00	6.475	0.270	6.858	10.000	44.480	0.600	15.24	0.043	1.09	14.00	SPR CG Z
0.266	6.756	S-1527	0.88	22.352	0.176	4.470	51.00	8.925	0.230	5.842	12.000	53.376	0.560	14.22	0.045	1.14	11.50	SST C N
0.266	6.756	3774	0.94	23.876	0.216	5.486	2.90	0.508	0.540	13.716	1.600	7.117	0.400	10.16	0.025	0.64	16.00	MW CG Z
0.266	6.756	3732	0.94	23.876	0.192	4.877	19.00	3.325	0.380	9.652	7.200	32.026	0.520	13.21	0.037	0.94	14.00	SPR CG Z
0.266	6.756	NN-71	0.94	23.876	0.146	3.708	251.00	43.925	0.110	2.794	26.000	115.648	0.630	16.00	0.060	1.52	10.50	SPR CG N
0.266	6.756	00-9	0.97	24.638	0.206	5.232	7.10	1.243	0.530	13.462	3.800	16.902	0.390	9.91	0.030	0.76	13.00	SST CG N
0.266	6.756	AA-41	1.00	25.400	0.226	5.740	1.50	0.263	0.730	18.542	1.100	4.893	0.270	6.86	0.020	0.51	12.50	MW C Z
0.266	6.756	KK-65	1.00	25.400	0.208	5.283	8.10	1.418	0.630	16.002	5.100	22.685	0.360	9.14	0.029	0.74	11.50	MW C Z
0.266	6.756	L-43	1.00	25.400	0.206	5.232	13.00	2.275	0.440	11.176	5.600	24.909	0.300	7.62	0.030	0.76	9.00	MW C Z
0.266	6.756	S-203	1.00	25.400	0.202	5.131	9.40	1.645	0.480	12.192	4.600	20.461	0.450	11.43	0.032	0.81	13.00	SST CG N
0.266	6.756	2895	1.00	25.400	0.198	5.029	14.00	2.450	0.560	14.224	7.900	35.139	0.440	11.18	0.034	0.86	13.00	MW CG Z
0.266	6.756	JJ-69	1.00	25.400	0.166	4.216	105.00	18.375	0.150	3.810	16.000	71.168	0.530	13.46	0.050	1.27	10.50	SPR CG N
0.266	6.756	12586	1.03	26.162	0.216	5.486	3.30	0.578	0.660	16.764	2.200	9.786	0.380	9.65	0.025	0.64	14.00	MW C Z
0.266	6.756	10537	1.03	26.162	0.202	5.131	9.80	1.715	0.580	14.732	5.700	25.354	0.450	11.43	0.032	0.81	14.00	MW CG Z
0.266	6.756	A9-58	1.06	26.924	0.204	5.182	6.80	1.190	0.550	13.970	3.700	16.458	0.510	12.95	0.031	0.79	15.50	SST C N




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends C F N sh									
0.266	6.756	12418	1.44	36.576	0.218	5.537	3.10	0.543	1.100	27.940	3.160	14.056	0.340	8.64	0.024	0.61	13.00	MW	C	N
0.266	6.756	YY-57	1.44	36.576	0.200	5.080	11.00	1.925	0.470	11.938	5.400	24.019	0.500	12.70	0.033	0.84	14.00	SPR	C	Z
0.266	6.756	11418	1.50	38.100	0.186	4.724	25.00	4.375	0.370	9.398	9.000	40.032	0.640	16.26	0.040	1.02	15.00	SPR	C	Z
0.266	6.756	2886	1.53	38.862	0.200	5.080	8.00	1.400	0.670	17.018	5.400	24.019	0.530	13.46	0.033	0.84	16.00	SPR	CG	GI
0.266	6.756	1515	1.53	38.862	0.196	4.978	12.00	2.100	0.690	17.526	8.400	37.363	0.570	14.48	0.035	0.89	16.30	MW	CG	GI
0.266	6.756	S-1354	1.56	39.624	0.204	5.182	6.90	1.208	0.600	15.240	4.200	18.682	0.500	12.70	0.031	0.79	15.00	SST	C	N
0.266	6.756	3198	1.56	39.624	0.202	5.131	9.20	1.610	0.740	18.796	6.800	30.246	0.510	12.95	0.032	0.81	15.00	MW	C	Z
0.266	6.756	3528	1.69	42.926	0.212	5.385	2.00	0.350	0.850	21.590	1.700	7.562	0.840	21.34	0.027	0.69	31.00	MW	CG	Z
0.266	6.756	2530	1.78	45.212	0.220	5.588	0.73	0.128	0.830	21.082	0.600	2.669	0.960	24.38	0.023	0.58	40.50	MW	C	Z
0.266	6.756	B11-56	1.88	47.752	0.204	5.182	6.80	1.190	0.910	23.114	6.200	27.578	0.560	14.22	0.031	0.79	17.00	MW	C	Z
0.266	6.756	10043	1.88	47.752	0.196	4.978	18.00	3.150	0.340	8.636	6.100	27.133	0.460	11.68	0.035	0.89	12.00	SPR	C	Z
0.266	6.756	A10-2	1.88	47.752	0.170	4.318	88.00	15.400	0.170	4.318	15.000	66.720	0.500	12.70	0.048	1.22	10.50	SPR	CG	N
0.266	6.756	3300	2.00	50.800	0.210	5.334	3.70	0.648	1.200	30.480	4.600	20.461	0.590	14.99	0.028	0.71	20.00	MW	C	Z
0.266	6.756	3784	2.00	50.800	0.190	4.826	9.90	1.733	0.780	19.812	7.700	34.250	1.100	27.94	0.038	0.97	28.00	SPR	C	Z
0.266	6.756	10755	2.06	52.324	0.192	4.877	7.70	1.348	0.880	22.352	6.700	29.802	1.070	27.18	0.037	0.94	28.00	SST	C	N
0.266	6.756	10892	2.13	54.102	0.222	5.639	1.00	0.175	1.500	38.100	1.600	7.117	0.480	12.19	0.022	0.56	22.00	SST	CG	N
0.266	6.756	YY-52	2.13	54.102	0.176	4.470	25.00	4.375	0.470	11.938	12.000	53.376	0.990	25.15	0.045	1.14	21.00	SST	C	N
0.266	6.756	U-44	2.25	57.150	0.214	5.436	1.90	0.333	1.500	38.100	2.800	12.454	0.750	19.05	0.026	0.66	28.00	MW	C	Z
0.266	6.756	K-91	2.25	57.150	0.158	4.013	52.00	9.100	0.380	9.652	20.000	88.960	1.460	37.08	0.054	1.37	27.00	SPR	CG	Z
0.266	6.756	3312	2.31	58.674	0.212	5.385	2.50	0.438	1.600	40.640	4.000	17.792	0.700	17.78	0.027	0.69	25.00	MW	C	Z
0.266	6.756	3915	2.50	63.500	0.190	4.826	9.00	1.575	0.860	21.844	7.700	34.250	1.200	30.48	0.038	0.97	30.50	SPR	C	Z
0.266	6.756	11462	3.00	76.200	0.190	4.826	9.00	1.575	1.200	30.480	11.000	48.928	1.140	28.96	0.038	0.97	30.00	MW	CG	Z
0.266	6.756	UU-55	4.00	101.600	0.212	5.385	0.88	0.154	2.400	60.960	2.100	9.341	1.590	40.39	0.027	0.69	58.00	SST	C	N
0.266	6.756	10435	4.06	103.124	0.184	4.674	7.90	1.383	1.200	30.480	9.600	42.701	1.930	49.02	0.041	1.04	47.00	SPR	CG	N
0.275	6.985	A16-69	0.94	23.876	0.177	4.496	80.00	14.000	0.270	6.858	22.000	97.856	0.540	13.72	0.049	1.24	11.00	MW	CG	Z
0.281	7.137	10688	0.22	5.588	0.231	5.867	33.00	5.775	0.090	2.286	3.100	13.789	0.100	2.54	0.025	0.64	3.00	MW	C	N
0.281	7.137	10684	0.25	6.350	0.221	5.613	29.00	5.075	0.090	2.286	2.700	12.010	0.160	4.06	0.030	0.76	4.25	SST	C	N
0.281	7.137	12653	0.25	6.350	0.221	5.613	49.00	8.575	0.110	2.794	5.400	24.019	0.140	3.56	0.030	0.76	3.50	MW	C	N
0.281	7.137	00-62	0.25	6.350	0.217	5.512	49.00	8.575	0.100	2.540	4.700	20.906	0.130	3.30	0.032	0.81	4.00	SPR	CG	N
0.281	7.137	DD-26	0.28	7.112	0.217	5.512	22.00	3.850	0.090	2.286	1.900	8.451	0.190	4.83	0.032	0.81	6.00	SST	CG	N
0.281	7.137	W-63	0.28	7.112	0.211	5.359	72.00	12.600	0.080	2.032	5.800	25.798	0.180	4.57	0.035	0.89	4.00	SPR	C	Z
0.281	7.137	A9-56	0.31	7.874	0.257	6.528	0.34	0.060	0.220	5.588	0.080	0.356	0.090	2.29	0.012	0.30	6.50	MW	C	N
0.281	7.137	L-83	0.31	7.874	0.229	5.817	11.00	1.925	0.180	4.572	2.100	9.341	0.130	3.30	0.026	0.66	5.00	SST	CG	N
0.281	7.137	11439	0.34	8.636	0.221	5.613	29.00	5.075	0.120	3.048	3.600	16.013	0.160	4.06	0.030	0.76	4.25	SST	C	N
0.281	7.137	933	0.38	9.652	0.201	5.105	75.00	13.125	0.110	2.794	8.500	37.808	0.260	6.60	0.040	1.02	5.50	HD	C	Z
0.281	7.137	WW-46	0.38	9.652	0.175	4.445	319.00	55.825	0.060	1.524	18.000	80.064	0.270	6.86	0.053	1.35	5.00	SPR	CG	Z
0.281	7.137	930	0.38	9.652	0.173	4.394	348.00	60.900	0.050	1.270	18.000	80.064	0.320	8.13	0.054	1.37	5.00	HD	C	Z
0.281	7.137	I-72	0.38	9.652	0.131	3.327	2601.00	455.175	0.020	0.508	44.000	195.712	0.300	7.62	0.075	1.91	4.00	SPR	CG	N
0.281	7.137	II-51	0.41	10.414	0.249	6.325	0.68	0.119	0.250	6.350	0.170	0.756	0.150	3.81	0.016	0.41	8.50	SST	C	N
0.281	7.137	10744	0.41	10.414	0.225	5.715	18.00	3.150	0.240	6.096	4.300	19.126	0.170	4.32	0.028	0.71	5.00	MW	C	N
0.281	7.137	Z-13	0.41	10.414	0.211	5.359	32.00	5.600	0.170	4.318	5.400	24.019	0.210	5.33	0.035	0.89	6.00	SST	C	N
0.281	7.137	NN-17	0.41	10.414	0.147	3.734	985.00	172.375	0.030	0.762	34.000	151.232	0.340	8.64	0.067	1.70	5.00	SPR	CG	Z
0.281	7.137	MM-61	0.44	11.176	0.251	6.375	0.34	0.060	0.240	6.096	0.080	0.356	0.200	5.08	0.015	0.38	12.00	SST	C	N
0.281	7.137	NN-14	0.44	11.176	0.221	6.172	1.60	0.280	0.280	7.112	0.460	2.046	0.160	4.06	0.019	0.48	7.50	SST	C	Z
0.281	7.137	2913	0.44	11.176	0.211	5.359	48.00	8.400	0.120	3.048	5.800	25.798	0.210	5.33	0.035	0.89	5.00	SPR	C	Z
0.281	7.137	EE-13	0.44	11.176	0.211	5.359	36.00	6.300	0.150	3.810	5.400	24.019	0.190	4.83	0.035	0.89	5.50	SST	CG	N
0.281	7.137	3900	0.44	11.176	0.201	5.105	66.00	11.550	0.130	3.302	8.500	37.808	0.280	7.11	0.040	1.02	6.00	SPR	C	Z
0.281	7.137	AA-20	0.44	11.176	0.201	5.105	47.00	8.225	0.160	4.064	7.400	28.915	0.280	7.11	0.040	1.02	7.00	SST	CG	N
0.281	7.137	B-79	0.44	11.176	0.187	4.750	136.00	23.800	0.090	2.286	13.000	57.824	0.260	6.60	0.047	1.19	5.50	SST	CG	N
0.281	7.137	S-1058	0.44	11.176	0.173	4.394	260.00	45.500	0.070	1.778	18.000	80.064	0.300	7.62	0.054	1.37	5.50	SST	CG	N
0.281	7.137	A9-1	0.47	11.938	0.237	6.020	2.30	0.403	0.260	6.604	0.590	2.624	0.210	5.33	0.022	0.56	9.50	SST	CG	N
0.281	7.137	10945	0.47	11.938	0.215	5.461	37.00	6.475	0.190	4.826	7.100	31.581	0.200	5.08	0.033	0.84	5.00	MW	C	Z
0.281	7.137	A-63	0.47	11.938	0.203	5.156	78.00	13.650	0.100	2.540	7.900	35.139	0.200	5.08	0.039	0.99	5.00	SPR	CG	Z
0.281	7.137	W-87	0.50	12.700	0.257	6.528	0.12	0.021</td												




Century Spring

Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
0.281	7.137 A9-28	0.63 16.002	0.219 5.563	15.00 2.625	0.360 9.144	5.600 24.909	0.260 6.60	0.031 0.79	7.50	MW C	GI	
0.281	7.137 GG-33	0.63 16.002	0.205 5.207	29.00 5.075	0.240 6.096	6.900 30.691	0.320 8.13	0.038 0.97	8.50	SST CG	N	
0.281	7.137 3888	0.63 16.002	0.201 5.105	44.00 7.700	0.190 4.826	8.500 37.808	0.320 8.13	0.040 1.02	8.00	SPR CG	Z	
0.281	7.137 Y-32	0.63 16.002	0.195 4.953	54.00 9.450	0.180 4.572	9.900 44.035	0.340 8.64	0.043 1.09	8.00	SST CG	N	
0.281	7.137 B-76	0.66 16.764	0.223 5.664	10.00 1.750	0.320 8.128	3.200 14.234	0.250 6.35	0.029 0.74	7.50	SST C	N	
0.281	7.137 A9-53	0.66 16.764	0.219 5.563	13.00 2.275	0.310 7.874	3.900 17.347	0.250 6.35	0.031 0.79	8.00	SST CG	N	
0.281	7.137 BB-18	0.69 17.526	0.257 6.528	0.10 0.018	0.480 12.192	0.050 0.222	0.200 5.08	0.012 0.30	16.00	SST C	N	
0.281	7.137 12652	0.69 17.526	0.247 6.274	1.30 0.228	0.550 13.970	0.720 3.203	0.140 3.56	0.017 0.43	7.00	MW C	Z	
0.281	7.137 3543	0.69 17.526	0.233 5.918	8.00 1.400	0.370 9.398	2.900 12.899	0.160 4.06	0.024 0.61	5.50	MW C	Z	
0.281	7.137 B9-42	0.69 17.526	0.233 5.918	2.30 0.403	0.350 8.890	0.820 3.647	0.340 8.64	0.024 0.61	14.00	MW CG	N	
0.281	7.137 JJ-77	0.69 17.526	0.231 5.867	8.40 1.470	0.370 9.398	3.100 13.789	0.180 4.57	0.025 0.64	6.00	MW C	Z	
0.281	7.137 10885	0.69 17.526	0.221 5.613	11.00 1.925	0.400 10.160	4.600 20.461	0.290 7.37	0.030 0.76	8.50	SPR CG	GI	
0.281	7.137 S-1252	0.69 17.526	0.219 5.563	15.00 2.625	0.270 6.858	3.900 17.347	0.220 5.59	0.031 0.79	7.00	SST CG	N	
0.281	7.137 3592	0.69 17.526	0.217 5.512	18.00 3.150	0.360 9.144	6.500 28.912	0.270 6.86	0.032 0.81	7.50	MW C	Z	
0.281	7.137 DD-91	0.69 17.526	0.215 5.461	14.00 2.450	0.340 8.636	4.700 20.906	0.330 8.38	0.033 0.84	9.00	SST C	N	
0.281	7.137 HH-17	0.69 17.526	0.205 5.207	34.00 5.950	0.200 5.080	6.900 30.691	0.290 7.37	0.038 0.97	7.50	SST CG	N	
0.281	7.137 XX-12	0.69 17.526	0.187 4.750	100.00 17.500	0.140 3.556	14.000 62.272	0.350 8.89	0.047 1.19	7.50	SPR CG	Z	
0.281	7.137 10170	0.72 18.288	0.231 5.867	5.10 0.893	0.480 12.192	2.500 11.120	0.240 6.10	0.025 0.64	8.50	MW C	N	
0.281	7.137 DD-41	0.72 18.288	0.201 5.105	67.00 11.725	0.120 3.048	8.000 35.584	0.260 6.60	0.040 1.02	5.50	SST C	N	
0.281	7.137 DD-53	0.75 19.050	0.249 6.325	1.10 0.193	0.530 13.462	0.590 2.624	0.110 2.79	0.016 0.41	6.00	SST C	N	
0.281	7.137 4294	0.75 19.050	0.231 5.867	5.10 0.893	0.510 12.954	2.600 11.565	0.240 6.10	0.025 0.64	8.50	MW C	N	
0.281	7.137 3710	0.75 19.050	0.225 5.715	9.10 1.593	0.480 12.192	4.400 19.571	0.220 5.59	0.028 0.71	8.00	MW CG	GI	
0.281	7.137 S-927	0.75 19.050	0.225 5.715	10.00 1.750	0.290 7.366	2.900 12.899	0.220 5.59	0.028 0.71	6.75	SST C	N	
0.281	7.137 G-20	0.75 19.050	0.217 5.512	9.80 1.715	0.370 9.398	3.600 16.013	0.380 9.65	0.032 0.81	12.00	HD CG	N	
0.281	7.137 W-68	0.75 19.050	0.199 5.055	37.00 6.475	0.240 6.096	8.600 38.253	0.410 10.41	0.041 1.04	9.00	SST C	N	
0.281	7.137 S-914	0.78 19.812	0.249 6.325	1.10 0.193	0.520 13.208	0.590 2.624	0.110 2.79	0.016 0.41	6.00	SST C	N	
0.281	7.137 I-97	0.78 19.812	0.245 6.223	1.20 0.210	0.620 15.748	0.760 3.380	0.160 4.06	0.018 0.46	8.00	SST C	N	
0.281	7.137 HH-49	0.78 19.812	0.229 5.817	6.00 1.050	0.390 9.906	2.400 10.675	0.230 5.84	0.026 0.66	7.75	SST C	N	
0.281	7.137 W-94	0.81 20.574	0.253 6.426	0.42 0.074	0.690 17.526	0.290 1.290	0.130 3.30	0.014 0.36	8.00	SST C	N	
0.281	7.137 S-363	0.81 20.574	0.251 6.375	0.19 0.033	0.500 12.700	0.090 0.400	0.320 8.13	0.015 0.38	20.00	SST C	N	
0.281	7.137 0-64	0.81 20.574	0.219 5.563	10.60 1.855	0.375 9.525	4.000 17.792	0.280 7.11	0.031 0.79	9.00	SST CG	N	
0.281	7.137 3703	0.84 21.336	0.191 4.851	56.00 9.800	0.210 5.334	12.000 53.376	0.450 11.43	0.045 1.14	10.00	SPR CG	Z	
0.281	7.137 3609	0.88 22.352	0.249 6.325	0.46 0.081	0.650 16.510	0.300 1.334	0.220 5.59	0.016 0.41	13.00	MW C	Z	
0.281	7.137 EE-28	0.88 22.352	0.241 6.121	2.00 0.350	0.690 17.526	1.400 6.227	0.190 4.83	0.020 0.51	8.50	MW C	N	
0.281	7.137 S-1190	0.88 22.352	0.223 5.664	12.00 2.100	0.280 7.112	3.200 14.234	0.220 5.59	0.029 0.74	6.75	SST C	N	
0.281	7.137 A10-19	0.88 22.352	0.213 5.410	15.00 2.625	0.500 12.700	7.700 34.250	0.350 8.89	0.034 0.86	10.30	MW CG	N	
0.281	7.137 00-64	0.88 22.352	0.211 5.359	18.00 3.150	0.320 8.128	5.800 25.798	0.350 8.89	0.035 0.89	10.00	SPR CG	N	
0.281	7.137 Q-88	0.88 22.352	0.209 5.309	21.00 3.675	0.310 7.874	6.300 28.022	0.400 10.16	0.036 0.91	10.00	SPR C	GI	
0.281	7.137 AA-17	0.88 22.352	0.181 4.597	79.00 13.825	0.180 4.572	14.000 62.272	0.500 12.70	0.050 1.27	10.00	SST CG	N	
0.281	7.137 3531	0.91 23.114	0.201 5.105	29.00 5.075	0.400 10.160	12.000 53.376	0.440 11.18	0.040 1.02	11.00	MW CG	GI	
0.281	7.137 U-14	0.91 23.114	0.199 5.055	37.00 6.475	0.250 6.350	9.200 40.922	0.410 10.41	0.041 1.04	10.00	SPR CG	GI	
0.281	7.137 G-53	0.94 23.876	0.245 6.223	1.30 0.228	0.770 19.558	0.980 4.359	0.170 4.32	0.018 0.46	8.50	MW C	N	
0.281	7.137 HH-28	0.94 23.876	0.245 6.223	1.10 0.193	0.750 19.050	0.830 3.692	0.190 4.83	0.018 0.46	9.50	MW C	BO	
0.281	7.137 CC-28	0.94 23.876	0.241 6.121	1.40 0.245	0.700 17.780	1.000 4.448	0.240 6.10	0.020 0.51	11.00	MW C	Z	
0.281	7.137 S-107	0.94 23.876	0.225 5.715	5.80 1.015	0.510 12.954	2.900 12.899	0.320 8.13	0.028 0.71	10.30	SST C	N	
0.281	7.137 2632	1.00 25.400	0.251 6.375	0.32 0.056	0.780 19.812	0.250 1.112	0.230 5.84	0.015 0.38	14.00	MW C	Z	
0.281	7.137 10827	1.00 25.400	0.251 6.375	0.62 0.109	0.780 19.812	0.480 2.135	0.110 2.79	0.015 0.38	7.50	SST CG	N	
0.281	7.137 M-128	1.00 25.400	0.251 6.375	0.43 0.075	0.820 20.828	0.350 1.557	0.180 4.57	0.015 0.38	11.00	MW C	N	
0.281	7.137 A10-44	1.00 25.400	0.245 6.223	0.58 0.102	0.730 18.542	0.420 1.868	0.270 6.86	0.018 0.46	14.80	SST CG	N	
0.281	7.137 3522	1.00 25.400	0.237 6.020	1.90 0.333	0.710 18.034	1.400 6.227	0.290 7.37	0.022 0.56	12.00	MW C	Z	
0.281	7.137 932	1.00 25.400	0.225 5.715	3.90 0.683	0.520 13.208	2.000 8.896	0.480 12.19	0.028 0.71	16.00	MW C	Z	
0.281	7.137 PP-27	1.00 25.400	0.225 5.715	5.00 0.875	0.590 14.986	2.900 12.899	0.350 8.89	0.028 0.71	11.50	SST CG	N	
0.281	7.137 I-80	1.00 25.400	0.221 5.613	7.10 1.243	0.500 12.700	3.600 16.013	0.330 8.38	0.030 0.76	11.00	SST CG	N	
0.281	7.137 4208	1.00 25.400	0.219 5.563	9.70 1.698	0.610 15.494	5.900 26.243	0.360 9.14	0.031 0.79	10.80	MW C	Z	
0.281	7.137 Z-84	1.00 25.400	0.211 5.359	12.00 2.100	0.490 12.446	5.800 25.798	0.500 12.70	0.035 0.89	14.30	SPR CG	N	
0.281	7.137 B4-64	1.00 25.400	0.205 5.207	21.00 3.675	0.350 8.890	7.400 32.915	0.460 11.68	0.038 0.97	12.00	SPR CG	N	
0.281	7.137 3649	1.00 25.400	0.199 5.055	37.00 6.475	0.350 8.890	13.000 57.824	0.410 10.41	0.041 1.04	10.00	MW CG	Z	
0.281	7.137 S-998	1.00 25.400	0.181 4.597	63.00 11.025	0.230 5.842	14.000 62.272	0.600 15.24	0.050 1.27	12.00	SST CG	N	
0.281	7.137 S-1053	1.00 25.400	0.177 4.496	90.00 15.750	0.180 4.572	16.000 71.168	0.550 13.97	0.052 1.32	10.50	SST CG	N	
0.281	7.137 934	1.00 25.400	0.173 4.394	149.00 26.075	0.130 3.302	19.000 84.512	0.540 13.72	0.054 1.37	9.00	HD C	Z	
0.281	7.137 BB-90	1.00 25.400	0.173 4.394	104.00 18.200	0.180 4.572	19.000 84.512	0.650 16.51	0.054 1.37	12.00	SPR CG	Z	
0.281	7.137 KK-88	1.00 25.400	0.157 3.988	202.00 35.350	0.140 3.556	28.000 124.544	0.740 18.80	0.062 1.57	12.00	SPR CG	N	
0.281	7.137 10983	1.03 26.162	0.219 5.563	8.40 1.470	0.470 11.938	3.900 17.347	0.340 8.64	0.031 0.79	11.00	SST CG	N	
0.281	7.137 11352	1.03 26.162	0.211 5.359	9.30 1.628	0.440 11.176	4.200 18.682	0.590 14.99	0.035 0.89	15.80	SST C	N	
0.281	7.137 H-13	1.06 26.924	0.237 6.020	1.20 0.210	0.710 18.034	0.870 3.870	0.350 8.89	0.022 0.56	16.00	SST CG	N	
0.281	7.137 Q-92	1.06 26.924	0.201 5.105	22.00 3.850	0.390 9.906	8.500 37.808	0.560 14.22	0.04				




O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg. Max. Defl. Inches	Sugg. Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Fns'h
mm		mm	mm	N/mm	mm	N	mm	mm				
0.281	7.137	3806	1.25	31.750	0.225	5.715	5.20	0.910	0.840	21.336	4.400	19.571
0.281	7.137	I-65	1.25	31.750	0.225	5.715	4.70	0.823	0.840	21.336	4.000	17.792
0.281	7.137	4212	1.25	31.750	0.219	5.563	7.10	1.243	0.790	20.066	5.600	24.909
0.281	7.137	A11-56	1.25	31.750	0.215	5.461	9.30	1.628	0.550	13.970	5.100	22.685
0.281	7.137	3585	1.25	31.750	0.195	4.953	36.00	6.300	0.290	7.366	11.000	48.928
0.281	7.137	NN-99	1.25	31.750	0.181	4.597	56.00	9.800	0.270	6.858	15.000	66.720
0.281	7.137	B10-46	1.28	32.512	0.211	5.359	16.00	2.800	0.360	9.144	5.800	25.798
0.281	7.137	1637	1.28	32.512	0.165	4.191	173.00	30.275	0.130	3.302	23.000	102.304
0.281	7.137	1927	1.31	33.274	0.237	6.020	2.40	0.420	0.940	23.876	2.300	10.230
0.281	7.137	B11-49	1.31	33.274	0.199	5.055	33.00	5.775	0.280	7.112	9.200	40.922
0.281	7.137	NN-65	1.34	34.036	0.229	5.817	3.60	0.630	0.980	24.892	3.500	15.568
0.281	7.137	W-4	1.34	34.036	0.161	4.089	125.00	21.875	0.190	4.826	24.000	106.752
0.281	7.137	OO-92	1.38	35.052	0.251	6.375	0.39	0.068	1.200	30.480	0.460	2.046
0.281	7.137	4	1.38	35.052	0.225	5.715	4.40	0.770	0.940	23.876	4.100	18.237
0.281	7.137	3772	1.38	35.052	0.221	5.613	4.10	0.718	0.750	19.050	3.000	13.344
0.281	7.137	AA-9	1.38	35.052	0.221	5.613	8.20	1.435	0.650	16.510	5.400	24.019
0.281	7.137	3630	1.38	35.052	0.181	4.597	43.00	7.525	0.430	10.922	18.000	80.064
0.281	7.137	2964	1.41	35.814	0.219	5.563	6.10	1.068	0.880	22.352	5.300	23.574
0.281	7.137	2655	1.41	35.814	0.215	5.461	10.00	1.750	0.700	17.780	7.100	31.581
0.281	7.137	S-1075	1.50	38.100	0.217	5.512	5.30	0.928	0.820	20.828	4.300	19.126
0.281	7.137	JU-85	1.50	38.100	0.171	4.343	95.00	16.625	0.210	5.334	20.000	88.960
0.281	7.137	HH-41	1.56	39.624	0.181	4.597	33.00	5.775	0.430	10.922	14.000	62.272
0.281	7.137	L-60-A	1.63	41.402	0.231	5.867	2.00	0.350	1.100	27.940	2.300	10.230
0.281	7.137	S-1145	1.63	41.402	0.231	5.867	0.83	0.145	0.680	17.272	0.560	2.491
0.281	7.137	2795	1.63	41.402	0.223	5.664	4.00	0.700	1.100	27.940	4.300	19.126
0.281	7.137	HH-59	1.63	41.402	0.221	5.613	5.30	0.928	1.000	25.400	5.400	24.019
0.281	7.137	BB-91	1.63	41.402	0.211	5.359	7.00	1.225	0.770	19.558	5.400	24.019
0.281	7.137	10433	1.63	41.402	0.199	5.055	17.00	2.975	0.540	13.716	9.200	40.922
0.281	7.137	UU-67	1.75	44.450	0.243	6.172	0.65	0.114	1.400	35.560	0.920	4.092
0.281	7.137	S-1338	1.75	44.450	0.241	6.121	0.75	0.131	1.400	35.560	1.000	4.448
0.281	7.137	3622	1.84	46.736	0.153	3.886	157.00	27.475	0.270	6.858	42.000	186.816
0.281	7.137	K-33	2.00	50.800	0.233	5.918	1.80	0.315	1.600	40.640	2.800	12.454
0.281	7.137	L-38	2.00	50.800	0.225	5.715	2.60	0.455	1.300	33.020	3.500	15.568
0.281	7.137	S-1368	2.00	50.800	0.215	5.461	3.80	0.665	1.100	27.940	4.100	18.237
0.281	7.137	NN-12	2.03	51.562	0.201	5.105	8.60	1.505	0.870	22.098	7.500	33.360
0.281	7.137	12331	2.06	52.324	0.225	5.715	2.60	0.455	1.400	35.560	3.600	16.013
0.281	7.137	10812	2.50	63.500	0.243	6.172	0.31	0.054	1.900	48.260	0.580	2.580
0.281	7.137	B11-65	2.53	64.262	0.183	4.648	30.00	5.250	0.510	12.954	15.000	66.720
0.281	7.137	B10-33	2.63	66.802	0.225	5.715	27.00	4.725	0.160	4.064	4.400	19.571
0.281	7.137	909	2.63	66.802	0.213	5.410	4.50	0.788	1.600	40.640	7.000	31.136
0.281	7.137	2897	3.13	79.502	0.209	5.309	3.60	0.630	1.400	35.560	5.200	23.130
0.281	7.137	RR-34	3.25	82.550	0.207	5.258	7.70	1.348	0.880	22.352	6.800	30.246
0.281	7.137	B-51	3.50	88.900	0.217	5.512	6.10	1.068	1.100	27.940	6.500	28.912
0.281	7.137	3521	3.63	92.202	0.207	5.258	5.00	0.875	1.900	48.260	9.400	41.811
0.281	7.137	4307	5.00	127.000	0.231	5.867	0.56	0.098	3.400	86.360	1.900	8.451
0.296	7.518	A11-21	0.22	5.588	0.230	5.842	82.00	14.350	0.050	1.270	4.500	20.016
0.296	7.518	DD-42	0.25	6.350	0.256	6.502	5.40	0.945	0.160	4.064	0.830	3.692
0.296	7.518	B3-50	0.25	6.350	0.252	6.401	7.10	1.243	0.140	3.556	1.000	4.448
0.296	7.518	10894	0.25	6.350	0.232	5.893	73.00	12.775	0.060	1.524	4.100	18.237
0.296	7.518	J-59	0.25	6.350	0.226	5.740	104.00	18.200	0.050	1.270	5.200	23.130
0.296	7.518	GG-22	0.25	6.350	0.224	5.690	91.00	15.925	0.070	1.778	6.000	26.688
0.296	7.518	HH-19	0.25	6.350	0.216	5.486	130.00	22.750	0.060	1.524	7.600	33.805
0.296	7.518	Q-16	0.28	7.112	0.258	6.553	2.90	0.508	0.190	4.826	0.540	2.402
0.296	7.518	W-88	0.28	7.112	0.202	5.131	195.00	34.125	0.060	1.524	12.000	53.376
0.296	7.518	12647	0.30	7.620	0.236	5.994	18.00	3.150	0.150	3.810	2.600	11.565
0.296	7.518	M-11	0.30	7.620	0.226	5.740	42.00	7.350	0.120	3.048	5.200	23.130
0.296	7.518	B3-48	0.30	7.620	0.214	5.436	122.00	21.350	0.090	2.286	11.000	48.928
0.296	7.518	B-9	0.31	7.874	0.248	6.299	10.00	1.750	0.180	4.572	1.900	8.451
0.296	7.518	II-100	0.31	7.874	0.214	5.436	107.00	18.725	0.080	2.032	8.200	36.474
0.296	7.518	XX-6	0.31	7.874	0.176	4.470	93.00	163.275	0.030	0.762	24.000	106.752
0.296	7.518	F-47	0.34	8.636	0.266	6.756	0.93	0.163	0.250	6.350	0.230	1.023
0.296	7.518	W-10	0.34	8.636	0.244	6.198	9.60	1.680	0.190	4.826	1.800	8.006
0.296	7.518	EE-75	0.34	8.636	0.236	5.994	20.00	3.500	0.160	4.064	3.300	14.678
0.296	7.518	W-32	0.34	8.636	0.214	5.436	86.00	15.050	0.100	2.540	8.200	36.474
0.296	7.518	Q-78	0.34	8.636	0.196	4.978	238.00	41.650	0.060	1.524	14.000	62.272
0.296	7.518	B18-131	0.38	9.652	0.278	7.061	0.03	0.005	0.230	5.842	0.010	0.044
0.296	7.518	NN-1	0.38	9.652	0.266	6.756	0.46	0.081	0.230	5.842	0.100	0.445
0.296	7.518	WW-34	0.38	9.652	0.256	6.502	1.20	0.210	0.180	4.572	0.210	0.934
0.296	7.518	V-15	0.38	9.652	0.254	6.452	2.90	0.508	0.230	5.842	0.660	2.936
0.296	7.518	JJ-59	0.38	9.652	0.254	6.452	2.90	0.508	0.230	5.842	0.660	2.936
0.296	7.518	G-77	0.38	9.652	0.248	6.299	5.10	0.893	0.210	5.334	1.100	4.893
0.296	7.518	B8-5	0.38	9.652	0.230	5.842	27.00	4.725	0.180	4.572	4.900	21.795
0.296	7.518	M-55	0.38	9.652	0.222	5.639	68.00	11.900	0.100	2.540	6.500	28.912
0.296	7.518	B12-41	0.38	9.652	0.220	5.588	78.00	13.650	0.090	2.286	7.000	31.136
0.296	7.518	K-72	0.38	9.652	0.202	5.131	130.00	22.750	0.090	2.286	12.000	53.376
0.296	7.518	2966	0.38	9.652	0.196	4.978	199.00	34.825	0.070	1.778	14.000	62.272
0.296	7.518	A10-22	0.41	10.414	0.256	6.502	2.20	0.385	0.270	6.858	0.580	2.580
0.296	7.518	11137	0.41	10.414	0.240	6.096	5.70	0.998	0.100	2.540	0.560	2.491
0.296	7.518	A15-34	0.41	10.414	0.230	5.842	31.00	5.425	0.220	5.588	6.700	




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
0.296	7.518	A15-31	0.41 10.414	0.212 5.385	96.00 16.800	0.090 2.286	8.800 39.142	0.190 4.83	0.042 1.07	4.50	SST CG	N
0.296	7.518	L-5	0.41 10.414	0.202 5.131	120.00 21.000	0.110 2.794	13.000 57.824	0.270 6.86	0.047 1.19	5.75	SPR CG	N
0.296	7.518	B1-24	0.44 11.176	0.246 6.248	9.90 1.733	0.200 5.080	2.000 8.896	0.140 3.56	0.025 0.64	4.50	SST CG	C N
0.296	7.518	A10-10	0.44 11.176	0.236 5.994	18.00 3.150	0.190 4.826	3.400 15.123	0.150 3.81	0.030 0.76	5.00	SST CG	N
0.296	7.518	Z-98	0.44 11.176	0.234 5.944	21.00 3.675	0.180 4.572	3.800 16.902	0.160 4.06	0.031 0.79	5.00	SST CG	N
0.296	7.518	II-98	0.44 11.176	0.232 5.893	20.00 3.500	0.200 5.080	4.100 18.237	0.190 4.83	0.032 0.81	5.00	SST C	N
0.296	7.518	B-70	0.44 11.176	0.226 5.740	40.00 7.000	0.140 3.556	5.500 24.464	0.180 4.57	0.035 0.89	5.00	SPR CG	GI
0.296	7.518	JJ-98	0.44 11.176	0.210 5.334	75.00 13.125	0.130 3.302	9.400 41.811	0.240 6.10	0.043 1.09	5.50	SST CG	N
0.296	7.518	A-13	0.47 11.938	0.274 6.960	0.30 0.053	0.400 10.160	0.120 0.534	0.070 1.78	0.011 0.28	5.00	MW C	N
0.296	7.518	PP-13	0.47 11.938	0.264 6.706	0.94 0.165	0.350 8.890	0.330 1.468	0.120 3.05	0.016 0.41	6.50	MW C	N
0.296	7.518	L-73	0.47 11.938	0.254 6.452	4.40 0.770	0.340 8.636	1.500 6.672	0.130 3.30	0.021 0.53	5.00	MW C	Z
0.296	7.518	O-82	0.47 11.938	0.244 6.198	10.00 1.750	0.210 5.334	2.200 9.786	0.120 3.05	0.026 0.66	4.75	SST CG	N
0.296	7.518	Z-16	0.47 11.938	0.238 6.045	13.00 2.275	0.290 7.366	3.900 17.347	0.170 4.32	0.029 0.74	6.00	MW CG	N
0.296	7.518	A13-59	0.47 11.938	0.214 5.436	61.00 10.675	0.130 3.302	8.200 36.474	0.230 5.84	0.041 1.04	5.50	SST CG	N
0.296	7.518	A11-10	0.47 11.938	0.210 5.334	67.00 11.725	0.140 3.556	9.400 41.811	0.260 6.60	0.043 1.09	6.00	SST CG	N
0.296	7.518	LL-60	0.50 12.700	0.276 7.010	0.20 0.035	0.440 11.176	0.090 0.400	0.060 1.52	0.010 0.25	5.00	MW C	Z
0.296	7.518	10834	0.50 12.700	0.272 6.909	0.18 0.032	0.390 9.906	0.070 0.311	0.110 2.79	0.012 0.30	8.50	SST CG	N
0.296	7.518	B15-35	0.50 12.700	0.272 6.909	0.22 0.039	0.390 9.906	0.090 0.400	0.110 2.79	0.012 0.30	8.00	MW C	N
0.296	7.518	II-84	0.50 12.700	0.272 6.909	0.13 0.023	0.360 9.144	0.050 0.222	0.140 3.56	0.012 0.30	10.80	SST C	N
0.296	7.518	NN-58	0.50 12.700	0.272 6.909	0.14 0.025	0.360 9.144	0.050 0.222	0.140 3.56	0.012 0.30	11.00	MW C	N
0.296	7.518	NN-62	0.50 12.700	0.264 6.706	0.46 0.081	0.320 8.128	0.150 0.667	0.180 4.57	0.016 0.41	10.00	SST CG	N
0.296	7.518	JJ-24	0.50 12.700	0.260 6.604	2.30 0.403	0.390 9.906	0.910 4.048	0.110 2.79	0.018 0.46	5.00	MW C	N
0.296	7.518	XX-29	0.50 12.700	0.254 6.452	3.90 0.683	0.320 8.128	1.300 5.782	0.130 3.30	0.021 0.53	5.00	SST C	N
0.296	7.518	PP-70	0.50 12.700	0.252 6.401	5.40 0.945	0.370 9.398	2.000 8.896	0.130 3.30	0.022 0.56	5.00	MW C	Z
0.296	7.518	A15-9	0.50 12.700	0.250 6.350	7.80 1.365	0.320 8.128	2.500 11.120	0.100 2.54	0.023 0.58	4.50	MW CG	N
0.296	7.518	AA-8	0.50 12.700	0.244 6.198	3.80 0.665	0.250 6.350	0.970 4.315	0.250 6.35	0.026 0.66	9.50	SST CG	N
0.296	7.518	S-296	0.50 12.700	0.244 6.198	9.60 1.680	0.230 5.842	2.200 9.786	0.160 4.06	0.026 0.66	5.00	SST C	N
0.296	7.518	K-1	0.50 12.700	0.234 5.944	14.00 2.450	0.250 6.350	3.600 16.013	0.250 6.35	0.031 0.79	7.00	MW C	Z
0.296	7.518	I-71	0.50 12.700	0.232 5.893	27.00 4.725	0.160 4.064	4.400 19.571	0.160 4.06	0.032 0.81	5.00	SPR CG	N
0.296	7.518	Z-43	0.50 12.700	0.230 5.842	19.00 3.325	0.240 6.096	4.400 19.571	0.260 6.60	0.033 0.84	7.00	SPR C	Z
0.296	7.518	2563	0.50 12.700	0.218 5.537	65.00 11.375	0.120 3.048	7.600 33.805	0.230 5.84	0.039 0.99	5.00	SPR C	Z
0.296	7.518	K-97	0.50 12.700	0.212 5.385	67.00 11.725	0.130 3.302	8.800 39.142	0.230 5.84	0.042 1.07	5.50	SST CG	N
0.296	7.518	B15-59	0.50 12.700	0.208 5.283	84.00 14.700	0.130 3.302	11.000 48.928	0.260 6.60	0.044 1.12	6.00	SPR CG	Z
0.296	7.518	M-22	0.50 12.700	0.204 5.182	118.00 20.650	0.100 2.540	12.000 53.376	0.250 6.35	0.046 1.17	5.50	SPR CG	Z
0.296	7.518	10962	0.50 12.700	0.194 4.928	147.00 25.725	0.100 2.540	14.000 62.272	0.310 7.87	0.051 1.30	6.00	SST CG	N
0.296	7.518	W-20	0.50 12.700	0.162 4.115	592.00 103.600	0.050 1.270	31.000 137.888	0.370 9.40	0.067 1.70	5.50	SST CG	N
0.296	7.518	12422	0.53 13.462	0.272 6.909	0.24 0.042	0.430 10.922	0.100 0.445	0.100 2.54	0.012 0.30	7.50	MW C	N
0.296	7.518	A11-63	0.53 13.462	0.252 6.401	2.90 0.508	0.360 9.144	1.000 4.448	0.180 4.57	0.022 0.56	7.00	SST C	N
0.296	7.518	3734	0.53 13.462	0.232 5.893	18.00 3.150	0.290 7.366	5.200 23.130	0.240 6.10	0.032 0.81	6.50	MW C	Z
0.296	7.518	W-95	0.53 13.462	0.232 5.893	16.00 2.800	0.260 6.604	4.100 18.237	0.240 6.10	0.032 0.81	6.50	SST C	N
0.296	7.518	BB-85	0.53 13.462	0.202 5.131	100.00 17.500	0.130 3.302	13.000 57.824	0.310 7.87	0.047 1.19	6.50	SPR CG	Z
0.296	7.518	3914	0.53 13.462	0.188 4.775	213.00 37.275	0.080 2.032	18.000 80.064	0.320 8.13	0.054 1.37	6.00	SPR CG	Z
0.296	7.518	S-1420	0.56 14.224	0.248 6.299	6.80 1.190	0.270 6.858	1.900 8.451	0.140 3.56	0.024 0.61	5.00	SST CG	C N
0.296	7.518	J-5	0.56 14.224	0.246 6.248	7.00 1.225	0.290 9.906	2.700 12.010	0.180 4.57	0.025 0.64	6.00	MW C	N
0.296	7.518	Q-73	0.56 14.224	0.242 6.147	6.50 1.138	0.320 8.128	2.100 9.341	0.240 6.10	0.027 0.69	8.00	MW CG	Z
0.296	7.518	V-63	0.56 14.224	0.232 5.893	14.00 2.450	0.290 7.366	4.100 18.237	0.260 6.60	0.032 0.81	7.00	SST C	N
0.296	7.518	S-1372	0.56 14.224	0.226 5.740	23.00 4.025	0.220 5.588	5.200 23.130	0.230 5.84	0.035 0.89	6.50	SST CG	N
0.296	7.518	O-126	0.56 14.224	0.216 5.486	64.00 11.200	0.120 3.048	7.600 33.805	0.200 5.08	0.040 1.02	5.00	SST CG	N
0.296	7.518	J-65	0.56 14.224	0.202 5.131	112.00 19.600	0.120 3.048	13.000 57.824	0.330 8.38	0.047 1.19	6.00	SPR C	Z
0.296	7.518	S-1696	0.58 14.732	0.234 5.944	16.00 2.800	0.240 6.096	3.800 16.902	0.220 5.59	0.031 0.79	6.00	SST C	N
0.296	7.518	12404	0.59 14.986	0.268 6.807	0.55 0.096	0.490 12.446	0.270 1.201	0.110 2.79	0.014 0.36	6.50	MW C	N
0.296	7.518	B1-70	0.59 14.986	0.248 6.299	6.90 1.208	0.270 6.858	1.900 8.451	0.140 3.56	0.024 0.61	5.00	SST CG	N
0.296	7.518	M-103	0.59 14.986	0.246 6.248	5.40 0.945	0.370 9.398	2.000 8.896	0.160 4.06	0.025 0.64	6.50	SST CG	N
0.296	7.518	H-74	0.59 14.986	0.202 5.131	107.00 18.725	0.110 2.794	12.000 53.376	0.270 6.86	0.047 1.19	5.75	SST CG	N
0.296	7.518	4283	0.63 16.002	0.270 6.858	0.33 0.058	0.510 12.954	0.170 0.756	0.110 2.79	0.013 0.33	7.50	MW C	N
0.296	7.518	10854	0.63 16.002	0.262 6.655	1.20 0.210	0.510 12.954	0.620 2.758	0.120 3.05	0.017 0.43	6.00	SST C	N
0.296	7.518	B12-36	0.63 16.002	0.252 6.401	5.50 0.963	0.400 10.160	2.200 9.786	0.110 2.79	0.022 0.56	5.00	MW CG	Z
0.296	7.518	3193	0.63 16.002	0.246 6.248	8.00 1.400	0.370 9.398	3.000 13.344	0.160 4.06	0.025 0.64	5.50	MW CG	Z
0.296	7.518	B3-60	0.63 16.002	0.246 6.248	4.30 0.753	0.410 10.414	1.800 8.006	0.210 5.33	0.025 0.64	8.50	MW CG	Z
0.296	7.518	II-24	0.63 16.002	0.246 6.248	4.90 0.858	0.410 10.414	2.000 8.896	0.200 5.08	0.025 0.64	7.00	SST C	N
0.296	7.518	AA-98	0.63 16.002	0.240 6.096	7.20 1.260	0.390 9.906	2.800 12.454	0.210 5.33	0.028 0.71	7.50	SST CG	N
0.296	7.518	L-81	0.63 16.002	0.232 5.893	18.00 3.150	0.250 6.350	4.400 19.571	0.240 6.10	0.032 0.81	6.50	HD C	N
0.296	7.518	10077	0.63 16.002	0.228 5.791	21.00 3.675	0.250 6.350	5.300 23.574	0.270 6.86	0.034 0.86	7.00	SPR C	Z
0.296	7.518	A12-39	0.63 16.002	0.216 5.486	58.00 10.150	0.190 4.826	11.000 48.928	0.230 5.84	0.040 1.02	5.75	MW CG	GI
0.296	7.518	F-65	0.63 16.002	0.202 5.131	90.00 15.750	0.14						




O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg. Max. Defl. Inches	Sugg. Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Fns'h
mm		mm	mm	N/mm	mm	N	mm	mm				
0.296	7.518	F-43	0.69	17.526	0.202	5.131	83.00	14.525	0.160	4.064	13.000	57.824
0.296	7.518	NN-19	0.69	17.526	0.196	4.978	67.00	11.725	0.190	4.826	13.000	57.824
0.296	7.518	A10-16	0.72	18.288	0.264	6.706	0.68	0.119	0.580	14.732	0.400	1.779
0.296	7.518	B1-16	0.72	18.288	0.252	6.401	3.60	0.630	0.400	10.160	1.400	6.227
0.296	7.518	4396	0.72	18.288	0.180	4.572	238.00	41.650	0.090	2.286	22.000	97.856
0.296	7.518	S-3010	0.75	19.050	0.268	6.807	0.34	0.060	0.620	15.748	0.210	0.934
0.296	7.518	3172	0.75	19.050	0.266	6.756	0.52	0.091	0.610	15.494	0.320	1.423
0.296	7.518	KK-16	0.75	19.050	0.256	6.502	0.84	0.147	0.450	11.430	0.380	1.690
0.296	7.518	KK-3	0.75	19.050	0.256	6.502	1.20	0.210	0.510	12.954	0.610	2.713
0.296	7.518	G-25	0.75	19.050	0.252	6.401	4.10	0.718	0.530	13.462	2.200	9.786
0.296	7.518	W-75	0.75	19.050	0.252	6.401	2.50	0.438	0.540	13.716	1.300	5.782
0.296	7.518	10727	0.75	19.050	0.244	6.198	5.30	0.928	0.510	12.954	2.700	12.010
0.296	7.518	MM-22	0.75	19.050	0.236	5.994	6.90	1.208	0.450	11.430	3.100	13.789
0.296	7.518	S-124	0.75	19.050	0.236	5.994	8.90	1.558	0.390	9.906	3.400	15.123
0.296	7.518	3892	0.75	19.050	0.224	5.690	24.00	4.200	0.250	6.350	6.000	26.688
0.296	7.518	0-76	0.75	19.050	0.216	5.486	37.00	6.475	0.220	5.588	8.100	36.029
0.296	7.518	00-33	0.75	19.050	0.216	5.486	44.00	7.700	0.190	4.826	8.100	36.029
0.296	7.518	I-45	0.75	19.050	0.206	5.232	55.00	9.625	0.210	5.334	11.000	48.928
0.296	7.518	O-86	0.75	19.050	0.202	5.131	75.00	13.125	0.170	4.318	13.000	57.824
0.296	7.518	O-157	0.78	19.812	0.246	6.248	5.40	0.945	0.370	9.398	2.000	8.896
0.296	7.518	10432	0.78	19.812	0.200	5.080	80.00	14.000	0.170	4.318	14.000	62.272
0.296	7.518	3523	0.78	19.812	0.176	4.470	155.00	27.125	0.120	3.048	19.000	84.512
0.296	7.518	L-57	0.81	20.574	0.260	6.604	0.99	0.173	0.630	16.002	0.630	2.802
0.296	7.518	10869	0.81	20.574	0.256	6.502	1.90	0.333	0.560	14.224	1.100	4.893
0.296	7.518	A-19	0.81	20.574	0.256	6.502	1.20	0.210	0.590	14.986	0.700	3.114
0.296	7.518	10221	0.81	20.574	0.246	6.248	5.60	0.980	0.530	13.462	3.000	13.344
0.296	7.518	A-96	0.81	20.574	0.232	5.893	12.00	2.100	0.380	9.652	4.400	19.571
0.296	7.518	B5-18	0.81	20.574	0.232	5.893	12.00	2.100	0.380	9.652	4.400	19.571
0.296	7.518	I-44	0.81	20.574	0.232	5.893	9.30	1.628	0.470	11.938	4.300	19.126
0.296	7.518	S-842	0.81	20.574	0.232	5.893	10.00	1.750	0.410	10.414	4.100	18.237
0.296	7.518	A13-25	0.81	20.574	0.220	5.588	22.00	3.850	0.300	7.620	6.600	29.357
0.296	7.518	A15-58	0.81	20.574	0.208	5.283	46.00	8.050	0.230	5.842	11.000	48.928
0.296	7.518	B5-12	0.81	20.574	0.204	5.182	57.00	9.975	0.210	5.334	12.000	53.376
0.296	7.518	F-30	0.81	20.574	0.202	5.131	65.00	11.375	0.200	5.080	13.000	57.824
0.296	7.518	G-24	0.81	20.574	0.202	5.131	63.00	11.025	0.210	5.334	13.000	57.824
0.296	7.518	N-45	0.81	20.574	0.198	5.029	67.00	11.725	0.200	5.080	14.000	62.272
0.296	7.518	V-67	0.84	21.336	0.262	6.655	0.79	0.138	0.670	17.018	0.530	2.357
0.296	7.518	2714	0.84	21.336	0.256	6.502	1.60	0.280	0.650	16.510	1.000	4.448
0.296	7.518	A14-49	0.84	21.336	0.242	6.147	6.30	1.103	0.400	10.160	2.500	11.120
0.296	7.518	A12-8	0.88	22.352	0.270	6.858	0.32	0.056	0.760	19.304	0.240	1.068
0.296	7.518	EE-63	0.88	22.352	0.260	6.604	0.73	0.128	0.650	16.510	0.480	2.135
0.296	7.518	GG-93	0.88	22.352	0.260	6.604	0.60	0.105	0.640	16.256	0.390	1.735
0.296	7.518	BB-100	0.88	22.352	0.258	6.553	1.00	0.175	0.680	17.272	0.680	3.025
0.296	7.518	2782	0.88	22.352	0.256	6.502	2.20	0.385	0.540	13.716	1.200	5.338
0.296	7.518	B14-16	0.88	22.352	0.256	6.502	2.70	0.473	0.600	15.240	1.600	7.117
0.296	7.518	S-1288	0.88	22.352	0.256	6.502	2.10	0.368	0.520	13.208	1.100	4.893
0.296	7.518	A13-6	0.88	22.352	0.250	6.350	4.30	0.753	0.570	14.478	2.500	11.120
0.296	7.518	HH-51	0.88	22.352	0.248	6.299	2.10	0.368	0.580	14.732	1.200	5.338
0.296	7.518	A10-60	0.88	22.352	0.244	6.198	4.50	0.788	0.500	12.700	2.200	9.786
0.296	7.518	GG-2	0.88	22.352	0.236	5.994	9.10	1.593	0.370	9.398	3.400	15.123
0.296	7.518	AA-50	0.88	22.352	0.220	5.588	20.00	3.500	0.330	8.382	6.600	29.357
0.296	7.518	2812	0.88	22.352	0.214	5.436	24.00	4.200	0.340	8.636	8.300	36.918
0.296	7.518	A11-29	0.88	22.352	0.212	5.385	31.00	5.425	0.280	7.112	8.800	39.142
0.296	7.518	B11-40	0.88	22.352	0.208	5.283	42.00	7.350	0.260	6.604	11.000	48.928
0.296	7.518	K-4	0.88	22.352	0.206	5.232	38.00	6.650	0.280	7.112	11.000	48.928
0.296	7.518	B11-48	0.88	22.352	0.204	5.182	37.00	6.475	0.280	7.112	10.000	44.480
0.296	7.518	F-34	0.88	22.352	0.204	5.182	56.00	9.800	0.220	5.588	12.000	53.376
0.296	7.518	V-4	0.91	23.114	0.172	4.369	221.00	38.675	0.120	3.048	27.000	120.096
0.296	7.518	GG-50	0.94	23.876	0.266	6.756	0.47	0.082	0.800	20.320	0.380	1.690
0.296	7.518	Z-5	0.94	23.876	0.234	5.944	7.80	1.365	0.600	15.240	4.700	20.906
0.296	7.518	S-1497	0.94	23.876	0.220	5.588	19.00	3.325	0.340	8.636	6.600	29.357
0.296	7.518	JJ-13	0.94	23.876	0.216	5.486	27.00	4.725	0.300	7.620	8.100	36.029
0.296	7.518	3667	0.97	24.638	0.230	5.842	12.00	2.100	0.580	14.732	6.700	29.802
0.296	7.518	A15-64	0.97	24.638	0.230	5.842	13.00	2.275	0.370	9.398	4.900	21.795
0.296	7.518	B14-32	0.97	24.638	0.222	5.639	19.00	3.325	0.330	8.382	6.500	28.912
0.296	7.518	B2-29	0.98	24.892	0.210	5.334	36.00	6.300	0.280	7.112	10.000	44.480
0.296	7.518	Z-76	1.00	25.400	0.272	6.909	0.29	0.051	0.870	22.098	0.250	1.112
0.296	7.518	10266	1.00	25.400	0.266	6.756	0.51	0.089	0.860	21.844	0.430	1.913
0.296	7.518	PP-81	1.00	25.400	0.250	6.350	0.89	0.156	0.490	12.446	0.440	1.957
0.296	7.518	Z-49	1.00	25.400	0.246	6.248	3.70	0.648	0.530	13.462	2.000	8.896
0.296	7.518	G-62	1.00	25.400	0.244	6.198	3.30	0.578	0.670	17.018	2.200	9.786
0.296	7.518	JJ-43	1.00	25.400	0.242	6.147	4.90	0.858	0.700	17.780	3.400	15.123
0.296	7.518	2643	1.00	25.400	0.240	6.096	3.00	0.525	0.490	12.446	1.500	6.672
0.296	7.518	3763	1.00	25.400	0.236	5.994	12.00	2.100	0.420	10.668	5.100	22.685
0.296	7.518	3875	1.00	25.400	0.236	5.994	7.60	1.330	0.670	17.018	5.100	22.685
0.296	7.518	2666	1.00	25.400	0.232	5.893	9.00	1.575	0.620	15.748	5.500	24.464
0.296	7.518	B9-43	1.00	25.400	0.226	5.740	15.00	2.625	0.340	8.636	5.200	23.130
0.296	7.518	S-230	1.00	25.400	0.224	5.690	14.00	2.450	0.400	10.160	5.600	24.909
0.296	7.518	M-87	1.00	25.400	0.206	5.232	34.00	5.950	0.320	8.128		




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h						
0.296	7.518	UU-46	1.00	25.400	0.206	5.232	43.00	7.525	0.260	6.604	11.000	48.928	0.520	13.21	0.045	1.14	10.50	SPR C N
0.296	7.518	S-10	1.00	25.400	0.202	5.131	33.00	5.775	0.300	7.620	9.600	42.701	0.710	18.03	0.047	1.19	14.00	SST C N
0.296	7.518	L-55	1.00	25.400	0.196	4.978	52.00	9.100	0.280	7.112	14.000	62.272	0.680	17.27	0.050	1.27	13.50	SPR CG N
0.296	7.518	KK-33	1.00	25.400	0.186	4.724	77.00	13.475	0.230	5.842	18.000	80.064	0.740	18.80	0.055	1.40	12.50	SST C N
0.296	7.518	G-49	1.00	25.400	0.172	4.369	242.00	42.350	0.110	2.794	27.000	120.096	0.540	13.72	0.062	1.57	8.75	SPR CG Z
0.296	7.518	S-1306	1.03	26.162	0.220	5.588	20.00	3.500	0.330	8.382	6.600	29.357	0.360	9.14	0.038	0.97	9.50	SST CG N
0.296	7.518	S-37	1.03	26.162	0.152	3.861	365.00	63.875	0.100	2.540	36.000	160.128	0.810	20.57	0.072	1.83	10.30	SST C N
0.296	7.518	M-112	1.06	26.924	0.254	6.452	1.50	0.263	0.810	20.574	1.200	5.338	0.250	6.35	0.021	0.53	11.00	MW CG Z
0.296	7.518	S-1088	1.13	28.702	0.268	6.807	0.10	0.018	0.790	20.066	0.080	0.356	0.340	8.64	0.014	0.36	23.00	SST C N
0.296	7.518	H-53	1.13	28.702	0.252	6.401	1.80	0.315	0.820	20.828	1.400	6.227	0.240	6.10	0.022	0.56	10.00	SST C N
0.296	7.518	CC-29	1.13	28.702	0.248	6.299	2.50	0.438	0.830	21.082	2.000	8.896	0.300	7.62	0.024	0.61	11.50	MW C Z
0.296	7.518	10627	1.13	28.702	0.232	5.893	7.10	1.243	0.690	17.526	4.900	21.795	0.430	10.92	0.032	0.81	13.50	MW CG Z
0.296	7.518	S-1117	1.13	28.702	0.232	5.893	8.80	1.540	0.470	11.938	4.100	18.237	0.350	8.89	0.032	0.81	10.00	SST C N
0.296	7.518	3628	1.13	28.702	0.220	5.588	18.00	3.150	0.530	13.462	9.700	43.146	0.440	11.18	0.038	0.97	11.50	MW CG Z
0.296	7.518	S-793	1.13	28.702	0.220	5.588	16.00	2.800	0.420	10.668	6.600	29.357	0.440	11.18	0.038	0.97	11.50	SST CG N
0.296	7.518	MM-31	1.13	28.702	0.216	5.486	16.00	2.800	0.470	11.938	7.600	33.805	0.600	15.24	0.040	1.02	14.00	SST C N
0.296	7.518	A11-42	1.13	28.702	0.210	5.334	30.00	5.250	0.330	8.382	10.000	44.480	0.520	13.21	0.043	1.09	12.00	SPR CG GI
0.296	7.518	B8-31	1.16	29.464	0.234	5.944	9.00	1.575	0.420	10.668	3.800	16.902	0.280	7.11	0.031	0.79	9.00	SST CG N
0.296	7.518	B9-45	1.19	30.226	0.256	6.502	1.30	0.228	0.980	24.892	1.300	5.782	0.210	5.33	0.020	0.51	10.50	MW CG N
0.296	7.518	3219	1.19	30.226	0.254	6.452	1.40	0.245	0.930	23.622	1.300	5.782	0.260	6.60	0.021	0.53	11.30	MW C Z
0.296	7.518	LL-59	1.19	30.226	0.236	5.994	5.00	0.875	0.680	17.272	3.400	15.123	0.390	9.91	0.030	0.76	13.00	SST CG N
0.296	7.518	QQ-46	1.19	30.226	0.236	5.994	4.70	0.823	0.710	18.034	3.300	14.678	0.480	12.19	0.030	0.76	15.00	MW C Z
0.296	7.518	S-40	1.19	30.226	0.172	4.369	126.00	22.050	0.202	5.131	25.000	111.200	0.931	23.65	0.063	1.59	13.90	SST C N
0.296	7.518	S-1312	1.22	30.988	0.258	6.553	1.30	0.228	0.710	18.034	0.930	4.137	0.170	4.32	0.019	0.48	7.75	SST C N
0.296	7.518	3749	1.25	31.750	0.256	6.502	1.40	0.245	1.000	25.400	1.400	6.227	0.220	5.59	0.020	0.51	10.00	MW C Z
0.296	7.518	4324	1.25	31.750	0.242	6.147	3.20	0.560	0.850	21.590	2.700	12.010	0.410	10.41	0.027	0.69	14.00	MW C Z
0.296	7.518	Q-25	1.25	31.750	0.236	5.994	3.90	0.683	0.710	18.034	2.700	12.010	0.540	13.72	0.030	0.76	18.00	MW CG GI
0.296	7.518	3839	1.25	31.750	0.232	5.893	8.10	1.418	0.550	13.970	4.400	19.571	0.420	10.67	0.032	0.81	12.00	HD C Z
0.296	7.518	XX-52	1.25	31.750	0.216	5.486	20.00	3.500	0.410	10.414	8.100	36.029	0.560	14.22	0.040	1.02	13.00	SPR C Z
0.296	7.518	Y-79	1.25	31.750	0.186	4.724	84.00	14.700	0.230	5.842	19.000	84.512	0.720	18.29	0.055	1.40	13.00	SPR CG N
0.296	7.518	CC-67	1.28	32.512	0.236	5.994	6.50	1.138	0.530	13.462	3.400	15.123	0.320	8.13	0.030	0.76	10.50	SST CG N
0.296	7.518	M-96	1.28	32.512	0.182	4.623	129.00	22.575	0.160	4.064	21.000	93.408	0.600	15.24	0.057	1.45	10.50	SPR CG Z
0.296	7.518	S-3076	1.31	33.274	0.238	6.045	5.40	0.945	0.570	14.478	3.100	13.789	0.330	8.38	0.029	0.74	10.50	SST C N
0.296	7.518	I-77	1.31	33.274	0.206	5.232	32.00	5.600	0.350	8.890	11.000	48.928	0.610	15.49	0.045	1.14	13.50	SPR CG N
0.296	7.518	WW-56	1.38	35.052	0.258	6.553	1.20	0.210	1.100	27.940	1.400	6.227	0.190	4.83	0.019	0.48	9.00	MW C Z
0.296	7.518	3855	1.38	35.052	0.240	6.096	4.30	0.753	0.960	24.384	4.200	18.682	0.380	9.65	0.028	0.71	12.50	MW C Z
0.296	7.518	KK-28	1.38	35.052	0.236	5.994	6.20	1.085	0.820	20.828	5.100	22.685	0.360	9.14	0.030	0.76	12.00	MW CG GI
0.296	7.518	4319	1.38	35.052	0.234	5.944	4.70	0.823	0.820	20.828	3.800	16.902	0.560	14.22	0.031	0.79	17.00	MW C Z
0.296	7.518	A12-70	1.38	35.052	0.218	5.537	20.00	3.500	0.530	13.462	10.000	44.480	0.510	12.95	0.039	0.99	12.00	MW C Z
0.296	7.518	A13-46	1.38	35.052	0.218	5.537	15.00	2.625	0.480	12.192	7.100	31.581	0.540	13.72	0.039	0.99	13.80	SST CG N
0.296	7.518	2889	1.38	35.052	0.214	5.436	16.00	2.800	0.540	13.716	8.700	38.698	0.740	18.80	0.041	1.04	17.00	SPR C Z
0.296	7.518	B15-57	1.38	35.052	0.210	5.334	24.00	4.200	0.410	10.414	10.000	44.480	0.620	15.75	0.043	1.09	14.50	SPR CG Z
0.296	7.518	A11-13	1.38	35.052	0.200	5.080	34.00	5.950	0.360	9.144	12.000	53.376	0.674	17.12	0.048	1.21	14.00	SST CG N
0.296	7.518	11405	1.41	35.814	0.248	6.299	2.60	0.455	1.100	27.940	2.800	12.454	0.290	7.37	0.024	0.61	11.00	MW C Z
0.296	7.518	Q-54	1.44	36.576	0.202	5.131	28.00	4.900	0.440	11.176	12.000	53.376	0.750	19.05	0.047	1.19	16.00	SST CG N
0.296	7.518	K-86	1.44	36.576	0.196	4.978	40.00	7.000	0.340	8.636	14.000	62.272	0.750	19.05	0.050	1.27	15.00	SST CG N
0.296	7.518	H-83	1.50	38.100	0.256	6.502	0.72	0.126	1.200	30.480	0.850	3.781	0.320	8.13	0.020	0.51	15.00	SST C N
0.296	7.518	4280	1.50	38.100	0.238	6.045	4.10	0.718	1.000	25.400	4.200	18.682	0.460	11.68	0.029	0.74	15.00	MW C Z
0.296	7.518	11408	1.50	38.100	0.226	5.740	8.80	1.540	0.860	21.844	7.600	33.805	0.590	14.99	0.035	0.89	15.80	MW C Z
0.296	7.518	B9-10	1.50	38.100	0.222	5.740	9.30	1.628	0.590	14.986	5.500	24.464	0.530	13.46	0.035	0.89	15.00	SPR CG N
0.296	7.518	11900	1.50	38.100	0.222	5.639	11.00	1.925	0.550	13.970	6.100	27.133	0.540	13.72	0.037	0.94	14.50	SST CG N
0.296	7.518	A13-8	1.50	38.100	0.212	5.385	17.00	2.975	0.500	12.700	8.800	39.142	0.660	16.76	0.042	1.07	15.80	SST CG N
0.296	7.518	10057	1.50	38.100	0.206	5.232	26.00	4.550	0.440	11.176	11.000	48.928	0.770	19.56	0.045	1.14	16.00	SPR C GI
0.296	7.518	2840	1.63	41.402	0.228	5.791	5.90	1.033	0.950	24.130	5.600	24.909	0.680	17.27	0.034	0.86	19.90	MW CG Z
0.296	7.518	S-1558	1.63	41.402	0.228	5.791	4.50	0.788	0.830	21.082	3.700	16.458	0.800	20.32	0.034	0.86	22.50	SST C N
0.296	7.518	3532	1.66	42.164	0.222	5.639	9.30	1.628	0.700	17.780	6.5							




O.D. Inches	Century Stock Number	Free Length		I.D.		Rate		Sugg. Max. Defl.		Sugg. Max. Load		Solid Length		Wire Dia.		Total Coils		Ends Mat'l	En fsh	
		Inches	mm	Inches	mm	Lbs./In.	N/mm	_inch	mm	Lbs.	N	Inches	mm	_inch	mm	Mat'l				
0.296	7.518	2531	3.00	76.200	0.226	5.740	3.20	0.560	1.600	40.640	5.000	22.240	1.440	36.58	0.035	0.89	40.00	MW	C	Z
0.296	7.518	S-1441	3.00	76.200	0.200	5.080	13.00	2.275	0.942	23.927	12.200	54.266	1.610	40.89	0.048	1.21	34.00	SST	CG	N
0.296	7.518	S-1581	3.25	82.550	0.204	5.182	11.00	1.925	1.000	25.400	11.000	48.928	1.620	41.15	0.046	1.17	35.30	SST	CG	N
0.296	7.518	S-1014	3.41	86.614	0.202	5.131	16.00	2.800	0.780	19.812	12.000	53.376	1.320	33.53	0.047	1.19	27.00	SST	C	Z
0.296	7.518	10647	3.88	98.552	0.236	5.994	2.00	0.350	2.500	63.500	5.100	22.685	0.990	25.15	0.030	0.76	33.00	MW	C	Z
0.296	7.518	2570	7.50	190.500	0.224	5.690	2.00	0.350	3.000	76.200	6.000	26.688	2.590	65.79	0.036	0.91	71.00	SPR	C	Z
0.296	7.518	10513	7.50	190.500	0.214	5.436	3.60	0.630	2.500	63.500	8.700	38.698	2.900	73.66	0.041	1.04	70.80	SPR	CG	N
0.3	7.620	B4-65	0.34	8.636	0.254	6.452	4.70	0.823	0.220	5.588	1.000	4.448	0.130	3.30	0.023	0.58	5.50	SST	CG	N
0.3	7.620	70779	0.38	9.652	0.256	6.502	8.60	1.505	0.250	6.350	2.100	9.341	0.090	2.29	0.022	0.56	3.88	MW	CG	N
0.3	7.620	70779S	0.38	9.652	0.256	6.502	7.30	1.278	0.190	4.826	1.400	6.227	0.090	2.29	0.022	0.56	3.88	SST	CG	N
0.3	7.620	70802	0.38	9.652	0.248	6.299	15.00	2.625	0.210	5.334	3.300	14.678	0.110	2.79	0.026	0.66	4.13	MW	CG	N
0.3	7.620	70802S	0.38	9.652	0.248	6.299	13.00	2.275	0.170	4.318	2.200	9.786	0.110	2.79	0.026	0.66	4.13	SST	CG	N
0.3	7.620	70825	0.38	9.652	0.240	6.096	26.00	4.550	0.200	5.080	5.000	22.240	0.130	3.30	0.030	0.76	4.38	MW	CG	N
0.3	7.620	70825S	0.38	9.652	0.240	6.096	22.00	3.850	0.160	4.064	3.400	15.123	0.130	3.30	0.030	0.76	4.38	SST	CG	N
0.3	7.620	70847	0.38	9.652	0.236	5.994	33.00	5.775	0.190	4.826	6.100	27.133	0.140	3.56	0.032	0.81	4.38	MW	CG	N
0.3	7.620	70847S	0.38	9.652	0.236	5.994	28.00	4.900	0.150	3.810	4.100	18.237	0.140	3.56	0.032	0.81	4.38	SST	CG	N
0.3	7.620	70868	0.38	9.652	0.230	5.842	46.00	8.050	0.160	4.064	7.500	33.360	0.160	4.06	0.035	0.89	4.50	MW	CG	N
0.3	7.620	70868S	0.38	9.652	0.230	5.842	39.00	6.825	0.130	3.302	5.100	22.685	0.160	4.06	0.035	0.89	4.50	SST	CG	N
0.3	7.620	70887	0.38	9.652	0.224	5.690	64.00	11.200	0.150	3.810	9.600	42.701	0.180	4.57	0.038	0.97	4.63	MW	CG	N
0.3	7.620	70887S	0.38	9.652	0.224	5.690	55.00	9.625	0.120	3.048	6.500	28.912	0.180	4.57	0.038	0.97	4.63	SST	CG	N
0.3	7.620	70906	0.38	9.652	0.220	5.588	78.00	13.650	0.140	3.556	11.000	48.928	0.190	4.83	0.040	1.02	4.75	MW	CG	N
0.3	7.620	70906S	0.38	9.652	0.220	5.588	66.00	11.550	0.110	2.794	7.500	33.360	0.190	4.83	0.040	1.02	4.75	SST	CG	N
0.3	7.620	70925	0.38	9.652	0.216	5.486	107.00	18.725	0.120	3.048	13.000	57.824	0.190	4.83	0.042	1.07	4.50	MW	CG	N
0.3	7.620	70925S	0.38	9.652	0.216	5.486	91.00	15.925	0.100	2.540	8.700	38.698	0.190	4.83	0.042	1.07	4.50	SST	CG	N
0.3	7.620	70944	0.38	9.652	0.210	5.334	124.00	21.700	0.130	3.302	16.000	71.168	0.220	5.59	0.045	1.14	4.88	MW	CG	N
0.3	7.620	70944S	0.38	9.652	0.210	5.334	105.00	18.375	0.100	2.540	11.000	48.928	0.220	5.59	0.045	1.14	4.88	SST	CG	N
0.3	7.620	70963	0.38	9.652	0.206	5.232	159.00	27.825	0.110	2.794	18.000	80.064	0.220	5.59	0.047	1.19	4.75	MW	CG	N
0.3	7.620	70963S	0.38	9.652	0.206	5.232	135.00	23.625	0.090	2.286	12.000	53.376	0.220	5.59	0.047	1.19	4.75	SST	CG	N
0.3	7.620	70984	0.38	9.652	0.202	5.131	190.00	33.250	0.110	2.794	20.000	88.960	0.230	5.84	0.049	1.24	4.75	MW	CG	N
0.3	7.620	70984S	0.38	9.652	0.202	5.131	161.00	28.175	0.080	2.032	14.000	62.272	0.230	5.84	0.049	1.24	4.75	SST	CG	N
0.3	7.620	71005	0.38	9.652	0.198	5.029	228.00	39.900	0.090	2.286	21.000	93.408	0.240	6.10	0.051	1.30	4.75	MW	CG	N
0.3	7.620	71005S	0.38	9.652	0.198	5.029	194.00	33.950	0.070	1.778	14.000	62.272	0.240	6.10	0.051	1.30	4.75	SST	CG	N
0.3	7.620	70780	0.44	11.176	0.256	6.502	7.20	1.260	0.300	7.620	2.100	9.341	0.090	2.29	0.022	0.56	4.13	MW	CG	N
0.3	7.620	70780S	0.44	11.176	0.256	6.502	6.10	1.068	0.230	5.842	1.400	6.227	0.090	2.29	0.022	0.56	4.13	SST	CG	N
0.3	7.620	70803	0.44	11.176	0.248	6.299	13.00	2.275	0.250	6.350	3.300	14.678	0.110	2.79	0.026	0.66	4.38	MW	CG	N
0.3	7.620	70803S	0.44	11.176	0.248	6.299	11.00	1.925	0.200	5.080	2.200	9.786	0.110	2.79	0.026	0.66	4.38	SST	CG	N
0.3	7.620	70826	0.44	11.176	0.240	6.096	21.00	3.675	0.240	6.096	5.000	22.240	0.150	3.81	0.030	0.76	4.88	MW	CG	N
0.3	7.620	70826S	0.44	11.176	0.240	6.096	18.00	3.150	0.190	4.826	3.400	15.123	0.150	3.81	0.030	0.76	4.88	SST	CG	N
0.3	7.620	70848	0.44	11.176	0.236	5.994	27.00	4.725	0.220	5.588	6.100	27.133	0.160	4.06	0.032	0.81	4.88	MW	CG	N
0.3	7.620	70848S	0.44	11.176	0.236	5.994	23.00	4.025	0.180	4.572	4.100	18.237	0.160	4.06	0.032	0.81	4.88	SST	CG	N
0.3	7.620	70869	0.44	11.176	0.230	5.842	38.00	6.650	0.200	5.080	7.500	33.360	0.180	4.57	0.035	0.89	5.00	MW	CG	N
0.3	7.620	70869S	0.44	11.176	0.230	5.842	33.00	5.775	0.160	4.064	5.100	22.685	0.180	4.57	0.035	0.89	5.00	SST	CG	N
0.3	7.620	70888	0.44	11.176	0.224	5.690	53.00	9.275	0.180	4.572	9.600	42.701	0.190	4.83	0.038	0.97	5.13	MW	CG	N
0.3	7.620	70888S	0.44	11.176	0.224	5.690	45.00	7.875	0.140	3.556	6.500	28.912	0.190	4.83	0.038	0.97	5.13	SST	CG	N
0.3	7.620	70907	0.44	11.176	0.220	5.588	65.00	11.375	0.170	4.318	11.000	48.928	0.210	5.33	0.040	1.02	5.25	MW	CG	N
0.3	7.620	70907S	0.44	11.176	0.220	5.588	56.00	9.800	0.140	3.556	7.500	33.360	0.210	5.33	0.040	1.02	5.25	SST	CG	N
0.3	7.620	70926	0.44	11.176	0.216	5.486	89.00	15.575	0.140	3.556	13.000	57.824	0.200	5.08	0.042	1.07	4.88	MW	CG	N
0.3	7.620	70945	0.44	11.176	0.210	5.334	105.00	18.375	0.150	3.810	16.000	71.168	0.240	6.10	0.045	1.14	5.38	MW	CG	N
0.3	7.620	70945S	0.44	11.176	0.210	5.334	89.00	15.575	0.120	3.048	11.000	48.928	0.240	6.10	0.045	1.14	5.38	SST	CG	N
0.3	7.620	70964	0.44	11.176	0.206	5.232	132.00	23.100	0.130	3.302	18.000	80.064	0.250	6.35	0.047	1.19	5.25	MW	CG	N
0.3	7.620	70964S	0.44	11.176	0.206	5.232	112.00	19.600	0.110	2.794	12.000	53.376	0.250	6.35	0.047	1.19	5.25	SST	CG	N
0.3	7.620	70985	0.44	11.176	0.202	5.131	156.00	27.300	0.130	3.302	20.000	88.960	0.260	6.60	0.049	1.24	5.38	MW	CG	N
0.3	7.620	70985S	0.44	11.176	0.202	5.131	133.00	23.275	0.100	2.540	14.000	62.272	0.260	6.60	0.049	1.24	5.38	SST	CG	N
0.3	7.620	71006	0.44	11.176	0.198	5.029	187.00	32.725	0.110	2.794	21.000	93.408	0.270	6.86	0.051	1.30	5.38	MW	CG	N
0.3	7.620	71006S	0.44	11.176	0.198	5.029	159.00	27.825	0.090	2.286	14.000	62.272	0.270	6.86	0.051	1.30	5.38	SST	CG	N
0.3	7.620	B4-69	0.47	11.938	0.258	6.553	2.70	0.473	0.310	7.874	0.830	3.692	0.160	4.06	0.021	0.53	6.75	MW	C	GI
0.3	7.620	70781	0.50	12.700	0.256	6.502	6.60	1.155	0.330	8.382	2.100	9.341	0.100	2.54	0.022	0.56	4.38	MW	CG	N
0.3	7.620	70781S	0.50	12.700	0.256	6.502	5.60	0.980	0.250	6.350	1.400	6.227	0.100	2.54	0.022	0.56	4.38			

Compression Springs




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish	
0.3	7.620	71007S	0.50 12.700	0.198 5.029	134.00 23.450	0.110 2.794	14.000 62.272	0.310 7.87	0.051 1.30	6.00	SST	CG	N
0.3	7.620	70782	0.56 14.224	0.256 6.502	6.00 1.050	0.360 9.144	2.100 9.341	0.100 2.54	0.022 0.56	4.63	MW	CG	N
0.3	7.620	70782S	0.56 14.224	0.256 6.502	5.10 0.893	0.280 7.112	1.400 6.227	0.100 2.54	0.022 0.56	4.63	SST	CG	N
0.3	7.620	70805	0.56 14.224	0.248 6.299	10.00 1.750	0.330 8.382	3.300 14.678	0.130 3.30	0.026 0.66	5.13	MW	CG	N
0.3	7.620	70805S	0.56 14.224	0.248 6.299	8.60 1.505	0.260 6.604	2.200 9.786	0.130 3.30	0.026 0.66	5.13	SST	CG	N
0.3	7.620	70828	0.56 14.224	0.240 6.096	16.00 2.800	0.320 8.128	5.000 22.240	0.170 4.32	0.030 0.76	5.75	MW	CG	N
0.3	7.620	70828S	0.56 14.224	0.240 6.096	13.00 2.275	0.250 6.350	3.400 15.123	0.170 4.32	0.030 0.76	5.75	SST	CG	N
0.3	7.620	70850	0.56 14.224	0.236 5.994	20.00 3.500	0.300 7.620	6.100 27.133	0.190 4.83	0.032 0.81	5.88	MW	CG	N
0.3	7.620	70850S	0.56 14.224	0.236 5.994	17.00 2.975	0.240 6.096	4.100 18.237	0.190 4.83	0.032 0.81	5.88	SST	CG	N
0.3	7.620	70871	0.56 14.224	0.230 5.842	29.00 5.075	0.260 6.604	7.500 33.360	0.210 5.33	0.035 0.89	6.00	MW	CG	N
0.3	7.620	70871S	0.56 14.224	0.230 5.842	24.00 4.200	0.210 5.334	5.100 22.685	0.210 5.33	0.035 0.89	6.00	SST	CG	N
0.3	7.620	70890	0.56 14.224	0.224 5.690	39.00 6.825	0.250 6.350	9.600 42.701	0.240 6.10	0.038 0.97	6.25	MW	CG	N
0.3	7.620	70890S	0.56 14.224	0.224 5.690	33.00 5.775	0.200 5.080	6.500 28.912	0.240 6.10	0.038 0.97	6.25	SST	CG	N
0.3	7.620	B4-34	0.56 14.224	0.224 5.690	37.00 6.475	0.260 6.604	9.600 42.701	0.250 6.35	0.038 0.97	6.50	MW	CG	GI
0.3	7.620	70909	0.56 14.224	0.220 5.588	48.00 8.400	0.230 5.842	11.000 48.928	0.260 6.60	0.040 1.02	6.38	MW	CG	N
0.3	7.620	70909S	0.56 14.224	0.220 5.588	41.00 7.175	0.180 4.572	7.500 33.360	0.260 6.60	0.040 1.02	6.38	SST	CG	N
0.3	7.620	70928	0.56 14.224	0.216 5.486	60.00 10.500	0.210 5.334	13.000 57.824	0.270 6.86	0.042 1.07	6.38	MW	CG	N
0.3	7.620	70928S	0.56 14.224	0.216 5.486	51.00 8.925	0.170 4.318	8.700 38.698	0.270 6.86	0.042 1.07	6.38	SST	CG	N
0.3	7.620	70947	0.56 14.224	0.210 5.334	78.00 13.650	0.200 5.080	16.000 71.168	0.300 7.62	0.045 1.14	6.63	MW	CG	N
0.3	7.620	70947S	0.56 14.224	0.210 5.334	66.00 11.550	0.160 4.064	11.000 48.928	0.300 7.62	0.045 1.14	6.63	SST	CG	N
0.3	7.620	70966	0.56 14.224	0.206 5.232	97.00 16.975	0.180 4.572	18.000 80.064	0.310 7.87	0.047 1.19	6.50	MW	CG	N
0.3	7.620	70966S	0.56 14.224	0.206 5.232	83.00 14.525	0.150 3.810	12.000 53.376	0.310 7.87	0.047 1.19	6.50	SST	CG	N
0.3	7.620	70987	0.56 14.224	0.202 5.131	116.00 20.300	0.170 4.318	20.000 88.960	0.320 8.13	0.049 1.24	6.50	MW	CG	N
0.3	7.620	70987S	0.56 14.224	0.202 5.131	98.00 17.150	0.140 3.556	14.000 62.272	0.320 8.13	0.049 1.24	6.50	SST	CG	N
0.3	7.620	71008	0.56 14.224	0.198 5.029	137.00 23.975	0.150 3.810	21.000 93.408	0.340 8.64	0.051 1.30	6.63	MW	CG	N
0.3	7.620	71008S	0.56 14.224	0.198 5.029	116.00 20.300	0.120 3.048	14.000 62.272	0.340 8.64	0.051 1.30	6.63	SST	CG	N
0.3	7.620	70783	0.63 16.002	0.256 6.502	5.00 0.875	0.430 10.922	2.100 9.341	0.110 2.79	0.022 0.56	5.13	MW	CG	N
0.3	7.620	70783S	0.63 16.002	0.256 6.502	4.30 0.753	0.330 8.382	1.400 6.227	0.110 2.79	0.022 0.56	5.13	SST	CG	N
0.3	7.620	70806	0.63 16.002	0.248 6.299	9.00 1.575	0.370 9.398	3.300 14.678	0.150 3.81	0.026 0.66	5.63	MW	CG	N
0.3	7.620	70806S	0.63 16.002	0.248 6.299	7.60 1.330	0.290 7.366	2.200 9.786	0.150 3.81	0.026 0.66	5.63	SST	CG	N
0.3	7.620	70829	0.63 16.002	0.240 6.096	14.00 2.450	0.360 9.144	5.000 22.240	0.190 4.83	0.030 0.76	6.25	MW	CG	N
0.3	7.620	70829S	0.63 16.002	0.240 6.096	12.00 2.100	0.280 7.112	3.400 15.123	0.190 4.83	0.030 0.76	6.25	SST	CG	N
0.3	7.620	70851	0.63 16.002	0.236 5.994	18.00 3.150	0.340 8.636	6.100 27.133	0.200 5.08	0.032 0.81	6.38	MW	CG	N
0.3	7.620	70851S	0.63 16.002	0.236 5.994	15.00 2.625	0.260 6.604	4.100 18.237	0.200 5.08	0.032 0.81	6.38	SST	CG	N
0.3	7.620	70872	0.63 16.002	0.230 5.842	26.00 4.550	0.290 7.366	7.500 33.360	0.230 5.84	0.035 0.89	6.50	MW	CG	N
0.3	7.620	70872S	0.63 16.002	0.230 5.842	22.00 3.850	0.230 5.842	5.100 22.685	0.230 5.84	0.035 0.89	6.50	SST	CG	N
0.3	7.620	70891	0.63 16.002	0.224 5.690	35.00 6.125	0.270 6.858	9.600 42.701	0.260 6.60	0.038 0.97	6.75	MW	CG	N
0.3	7.620	70891S	0.63 16.002	0.224 5.690	30.00 5.250	0.220 5.588	6.500 28.912	0.260 6.60	0.038 0.97	6.75	SST	CG	N
0.3	7.620	70910	0.63 16.002	0.220 5.588	43.00 7.525	0.260 6.604	11.000 48.928	0.280 7.11	0.040 1.02	6.88	MW	CG	N
0.3	7.620	70910S	0.63 16.002	0.220 5.588	37.00 6.475	0.210 5.334	7.500 33.360	0.280 7.11	0.040 1.02	6.88	SST	CG	N
0.3	7.620	70929	0.63 16.002	0.216 5.486	52.00 9.100	0.250 6.350	13.000 57.824	0.290 7.37	0.042 1.07	7.00	MW	CG	N
0.3	7.620	70929S	0.63 16.002	0.216 5.486	44.00 7.700	0.200 5.080	8.700 38.698	0.290 7.37	0.042 1.07	7.00	SST	CG	N
0.3	7.620	70948	0.63 16.002	0.210 5.334	68.00 11.900	0.230 5.842	16.000 71.168	0.330 8.38	0.045 1.14	7.25	MW	CG	N
0.3	7.620	70948S	0.63 16.002	0.210 5.334	58.00 10.150	0.180 4.572	11.000 48.928	0.330 8.38	0.045 1.14	7.25	SST	CG	N
0.3	7.620	70967	0.63 16.002	0.206 5.232	86.00 15.050	0.210 5.334	18.000 80.064	0.330 8.38	0.047 1.19	7.00	MW	CG	N
0.3	7.620	70967S	0.63 16.002	0.206 5.232	73.00 12.775	0.160 4.064	12.000 53.376	0.330 8.38	0.047 1.19	7.00	SST	CG	N
0.3	7.620	70988	0.63 16.002	0.202 5.131	102.00 17.850	0.200 5.080	20.000 88.960	0.350 8.89	0.049 1.24	7.13	MW	CG	N
0.3	7.620	70988S	0.63 16.002	0.202 5.131	87.00 15.225	0.160 4.064	14.000 62.272	0.350 8.89	0.049 1.24	7.13	SST	CG	N
0.3	7.620	71009	0.63 16.002	0.198 5.029	121.00 21.175	0.170 4.318	21.000 93.408	0.370 9.40	0.051 1.30	7.25	MW	CG	N
0.3	7.620	71009S	0.63 16.002	0.198 5.029	103.00 18.025	0.140 3.556	14.000 62.272	0.370 9.40	0.051 1.30	7.25	SST	CG	N
0.3	7.620	70784	0.69 17.526	0.256 6.502	4.60 0.805	0.460 11.684	2.100 9.341	0.120 3.05	0.022 0.56	5.38	MW	CG	N
0.3	7.620	70784S	0.69 17.526	0.256 6.502	3.90 0.683	0.360 9.144	1.400 6.227	0.120 3.05	0.022 0.56	5.38	SST	CG	N
0.3	7.620	70807	0.69 17.526	0.248 6.299	7.90 1.383	0.420 10.668	3.300 14.678	0.160 4.06	0.026 0.66	6.00	MW	CG	N
0.3	7.620	70807S	0.69 17.526	0.248 6.299	6.70 1.173	0.330 8.382	2.200 9.786	0.160 4.06	0.026 0.66	6.00	SST	CG	N
0.3	7.620	70823	0.69 17.526	0.242 6.147	9.00 1.575	0.470 11.938	4.200 18.682	0.220 5.59	0.029 0.74	7.63	MW	CG	N
0.3	7.620	70823S	0.69 17.526	0.242 6.147	7.70 1.348	0.400 10.160	3.100 13.789	0.220 5.59	0.029 0.74	7.63	SST	CG	N
0.3	7.620	70830	0.69 17.526	0.240 6.096	13.00 2.275	0.400 10.160	5.000 22.240	0.200 5.08	0.030 0.76	6.75	MW	CG	N
0.3	7.620	70830S	0.69 17.526	0.240 6.096	11.00 1.925	0.320 8.128	3.400 15.123	0.200 5.08	0.030 0.76	6.75	SST	CG	N
0.3	7.620	70852	0.69 17.526	0.236 5.994	16.00 2.800	0.380 9.652	6.100 27.133	0.220 5.59	0.032 0.81	6.88	MW	CG	N
0.3	7.620	70852S	0.69 17.526	0.236 5.994	14.00 2.450	0.300 7.620	4.100 18.237	0.220 5.59	0.032 0.81	6.88	SST	CG	N
0.3	7.620	70873	0.69 17.526	0.230 5.842	23.00 4.025	0.330 8.382	7.500 33.360	0.250 6.35	0.035 0.89	7.13	MW	CG	N
0.3	7.620	70873S	0.69 17.526	0.230 5.842	19.00 3.325	0.260 6.604	5.100 22.685	0.250 6.35	0.035 0.89	7.13	SST	CG	N
0.3	7.620	70892	0.69 17.526	0.224 5.690	30.00 5.250	0.320 8.128	9.600 42.701</td						




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h								
0.3	7.620	70831	0.75	19.050	0.240	6.096	11.00	1.925	0.440	11.176	5.000	22.240	0.210	5.33	0.030	0.76	7.13	MW	CG	N
0.3	7.620	70831S	0.75	19.050	0.240	6.096	9.70	1.698	0.350	8.890	3.400	15.123	0.210	5.33	0.030	0.76	7.13	SST	CG	N
0.3	7.620	70853	0.75	19.050	0.236	5.994	15.00	2.625	0.410	10.414	6.100	27.133	0.230	5.84	0.032	0.81	7.25	MW	CG	N
0.3	7.620	70853S	0.75	19.050	0.236	5.994	13.00	2.275	0.320	8.128	4.100	18.237	0.230	5.84	0.032	0.81	7.25	SST	CG	N
0.3	7.620	70874	0.75	19.050	0.230	5.842	21.00	3.675	0.360	9.144	7.500	33.360	0.270	6.86	0.035	0.89	7.63	MW	CG	N
0.3	7.620	70874S	0.75	19.050	0.230	5.842	18.00	3.150	0.290	7.366	5.100	22.685	0.270	6.86	0.035	0.89	7.63	SST	CG	N
0.3	7.620	70893	0.75	19.050	0.224	5.690	28.00	4.900	0.340	8.636	9.600	42.701	0.300	7.62	0.038	0.97	8.00	MW	CG	N
0.3	7.620	70893S	0.75	19.050	0.224	5.690	24.00	4.200	0.270	6.858	6.500	28.912	0.300	7.62	0.038	0.97	8.00	SST	CG	N
0.3	7.620	70912	0.75	19.050	0.220	5.588	34.00	5.950	0.320	8.128	11.000	48.928	0.330	8.38	0.040	1.02	8.13	MW	CG	N
0.3	7.620	70912S	0.75	19.050	0.220	5.588	29.00	5.075	0.260	6.604	7.500	33.360	0.330	8.38	0.040	1.02	8.13	SST	CG	N
0.3	7.620	70931	0.75	19.050	0.216	5.486	42.00	7.350	0.310	7.874	13.000	57.824	0.350	8.89	0.042	1.07	8.25	MW	CG	N
0.3	7.620	70931S	0.75	19.050	0.216	5.486	36.00	6.300	0.240	6.096	8.700	38.698	0.350	8.89	0.042	1.07	8.25	SST	CG	N
0.3	7.620	70950	0.75	19.050	0.210	5.334	55.00	9.625	0.280	7.112	16.000	71.168	0.380	9.65	0.045	1.14	8.50	MW	CG	N
0.3	7.620	70950S	0.75	19.050	0.210	5.334	47.00	8.225	0.230	5.842	11.000	48.928	0.380	9.65	0.045	1.14	8.50	SST	CG	N
0.3	7.620	70969	0.75	19.050	0.206	5.232	69.00	12.075	0.260	6.604	18.000	80.064	0.390	9.91	0.047	1.19	8.25	MW	CG	N
0.3	7.620	70969S	0.75	19.050	0.206	5.232	59.00	10.325	0.200	5.080	12.000	53.376	0.390	9.91	0.047	1.19	8.25	SST	CG	N
0.3	7.620	70990	0.75	19.050	0.202	5.131	82.00	14.350	0.240	6.096	20.000	88.960	0.410	10.41	0.049	1.24	8.38	MW	CG	N
0.3	7.620	70990S	0.75	19.050	0.202	5.131	70.00	12.250	0.190	4.826	14.000	62.272	0.410	10.41	0.049	1.24	8.38	SST	CG	N
0.3	7.620	71011	0.75	19.050	0.198	5.029	97.00	16.975	0.220	5.588	21.000	93.408	0.430	10.92	0.051	1.30	8.50	MW	CG	N
0.3	7.620	71011S	0.75	19.050	0.198	5.029	82.00	14.350	0.170	4.318	14.000	62.272	0.430	10.92	0.051	1.30	8.50	SST	CG	N
0.3	7.620	70786	0.81	20.574	0.256	6.502	3.70	0.648	0.580	14.732	2.100	9.341	0.140	3.56	0.022	0.56	6.25	MW	CG	N
0.3	7.620	70786S	0.81	20.574	0.256	6.502	3.10	0.543	0.460	11.684	1.400	6.227	0.140	3.56	0.022	0.56	6.25	SST	CG	N
0.3	7.620	70809	0.81	20.574	0.248	6.299	6.90	1.208	0.480	12.192	3.300	14.678	0.170	4.32	0.026	0.66	6.63	MW	CG	N
0.3	7.620	70809S	0.81	20.574	0.248	6.299	5.80	1.015	0.380	9.652	2.200	9.786	0.170	4.32	0.026	0.66	6.63	SST	CG	N
0.3	7.620	70832	0.81	20.574	0.240	6.096	10.00	1.750	0.480	12.192	5.000	22.240	0.230	5.84	0.030	0.76	7.63	MW	CG	N
0.3	7.620	70832S	0.81	20.574	0.240	6.096	8.90	1.558	0.380	9.652	3.400	15.123	0.230	5.84	0.030	0.76	7.63	SST	CG	N
0.3	7.620	70854	0.81	20.574	0.236	5.994	14.00	2.450	0.450	11.430	6.100	27.133	0.250	6.35	0.032	0.81	7.75	MW	CG	N
0.3	7.620	70854S	0.81	20.574	0.236	5.994	12.00	2.100	0.350	8.890	4.100	18.237	0.250	6.35	0.032	0.81	7.75	SST	CG	N
0.3	7.620	70875	0.81	20.574	0.230	5.842	19.00	3.325	0.400	10.160	7.500	33.360	0.280	7.11	0.035	0.89	8.13	MW	CG	N
0.3	7.620	70875S	0.81	20.574	0.230	5.842	16.00	2.800	0.310	7.874	5.100	22.685	0.280	7.11	0.035	0.89	8.13	SST	CG	N
0.3	7.620	70894	0.81	20.574	0.224	5.690	26.00	4.550	0.370	9.398	9.600	42.701	0.320	8.13	0.038	0.97	8.38	MW	CG	N
0.3	7.620	70894S	0.81	20.574	0.224	5.690	22.00	3.850	0.290	7.366	6.500	28.912	0.320	8.13	0.038	0.97	8.38	SST	CG	N
0.3	7.620	70913	0.81	20.574	0.220	5.588	32.00	5.600	0.350	8.890	11.000	48.928	0.350	8.89	0.040	1.02	8.63	MW	CG	N
0.3	7.620	70913S	0.81	20.574	0.220	5.588	27.00	4.725	0.280	7.112	7.500	33.360	0.350	8.89	0.040	1.02	8.63	SST	CG	N
0.3	7.620	70932	0.81	20.574	0.216	5.486	38.00	6.650	0.340	8.636	13.000	57.824	0.370	9.40	0.042	1.07	8.88	MW	CG	N
0.3	7.620	70932S	0.81	20.574	0.216	5.486	32.00	5.600	0.270	6.858	8.700	38.698	0.370	9.40	0.042	1.07	8.88	SST	CG	N
0.3	7.620	70951	0.81	20.574	0.210	5.334	51.00	8.925	0.310	7.874	16.000	71.168	0.410	10.41	0.045	1.14	9.00	MW	CG	N
0.3	7.620	70951S	0.81	20.574	0.210	5.334	43.00	7.525	0.240	6.096	11.000	48.928	0.410	10.41	0.045	1.14	9.00	SST	CG	N
0.3	7.620	70970	0.81	20.574	0.206	5.232	63.00	11.025	0.280	7.112	18.000	80.064	0.420	10.67	0.047	1.19	8.88	MW	CG	N
0.3	7.620	70970S	0.81	20.574	0.206	5.232	54.00	9.450	0.220	5.588	12.000	53.376	0.420	10.67	0.047	1.19	8.88	SST	CG	N
0.3	7.620	70991	0.81	20.574	0.202	5.131	75.00	13.125	0.270	6.858	20.000	88.960	0.440	11.18	0.049	1.24	9.00	MW	CG	N
0.3	7.620	70991S	0.81	20.574	0.202	5.131	64.00	11.200	0.210	5.334	14.000	62.272	0.440	11.18	0.049	1.24	9.00	SST	CG	N
0.3	7.620	71012	0.81	20.574	0.198	5.029	89.00	15.575	0.240	6.096	21.000	93.408	0.470	11.94	0.051	1.30	9.13	MW	CG	N
0.3	7.620	71012S	0.81	20.574	0.198	5.029	75.00	13.125	0.190	4.826	14.000	62.272	0.470	11.94	0.051	1.30	9.13	SST	CG	N
0.3	7.620	70787	0.88	22.352	0.256	6.502	3.30	0.578	0.650	16.510	2.100	9.341	0.150	3.81	0.022	0.56	6.75	MW	CG	N
0.3	7.620	70787S	0.88	22.352	0.256	6.502	18.00	3.150	0.430	10.922	7.500	33.360	0.300	7.62	0.035	0.89	8.63	MW	CG	N
0.3	7.620	70876	0.88	22.352	0.230	6.299	5.10	0.893	0.430	10.922	2.200	9.786	0.190	4.83	0.026	0.66	7.25	SST	CG	N
0.3	7.620	70833	0.88	22.352	0.240	6.096	9.70	1.698	0.520	13.208	5.000	22.240	0.240	6.10	0.030	0.76	8.13	MW	CG	N
0.3	7.620	70833S	0.88	22.352	0.240	6.096	8.20	1.435	0.410	10.414	3.400	15.123	0.240	6.10	0.030	0.76	8.13	SST	CG	N
0.3	7.620	70855	0.88	22.352	0.236	5.994	12.00	2.100	0.490	12.446	6.100	27.133	0.270	6.86	0.032	0.81	8.38	MW	CG	N
0.3	7.620	70855S	0.88	22.352	0.236	5.994	10.00	1.750	0.390	9.906	4.100	18.237	0.270	6.86	0.032	0.81	8.38	SST	CG	N
0.3	7.620	70876	0.88	22.352	0.230	5.842	18.00	3.150	0.430	10.922	7.500	33.360	0.300	7.62	0.035	0.89	8.63	MW	CG	N
0.3	7.620	70876S	0.88	22.352	0.230	5.842	15.00	2.625	0.340	8.636	5.100	22.685	0.300	7.62	0.035	0.89	8.63	SST	CG	N
0.3	7.620	70895	0.88	22.352	0.224	5.690	23.00	4.025	0.410	10.414	9.600	42.701	0.3							




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.3	7.620	70915	0.94	23.876	0.220	5.588	27.00	4.725	0.410	10.414	11.000	48.928	0.390	9.91	0.040	1.02	9.75	MW CG N
0.3	7.620	70915S	0.94	23.876	0.220	5.588	23.00	4.025	0.330	8.382	7.500	33.360	0.390	9.91	0.040	1.02	9.75	SST CG N
0.3	7.620	70934	0.94	23.876	0.216	5.486	32.00	5.600	0.400	10.160	13.000	57.824	0.430	10.92	0.042	1.07	10.10	MW CG N
0.3	7.620	70934S	0.94	23.876	0.216	5.486	27.00	4.725	0.320	8.128	8.700	38.698	0.430	10.92	0.042	1.07	10.10	SST CG N
0.3	7.620	70953	0.94	23.876	0.210	5.334	42.00	7.350	0.370	9.398	16.000	71.168	0.470	11.94	0.045	1.14	10.40	MW CG N
0.3	7.620	70953S	0.94	23.876	0.210	5.334	36.00	6.300	0.300	7.620	11.000	48.928	0.470	11.94	0.045	1.14	10.40	SST CG N
0.3	7.620	70972	0.94	23.876	0.206	5.232	54.00	9.450	0.330	8.382	18.000	80.064	0.470	11.94	0.047	1.19	10.00	MW CG N
0.3	7.620	70972S	0.94	23.876	0.206	5.232	46.00	8.050	0.260	6.604	12.000	53.376	0.470	11.94	0.047	1.19	10.00	SST CG N
0.3	7.620	70993	0.94	23.876	0.202	5.131	64.00	11.200	0.320	8.128	20.000	88.960	0.500	12.70	0.049	1.24	10.30	MW CG N
0.3	7.620	70993S	0.94	23.876	0.202	5.131	54.00	9.450	0.250	6.350	14.000	62.272	0.500	12.70	0.049	1.24	10.30	SST CG N
0.3	7.620	71014	0.94	23.876	0.198	5.029	75.00	13.125	0.280	7.112	21.000	93.408	0.530	13.46	0.051	1.30	10.40	MW CG N
0.3	7.620	71014S	0.94	23.876	0.198	5.029	64.00	11.200	0.220	5.588	14.000	62.272	0.530	13.46	0.051	1.30	10.40	SST CG N
0.3	7.620	70790	1.00	25.400	0.256	6.502	3.00	0.525	0.710	18.034	2.100	9.341	0.160	4.06	0.022	0.56	7.25	MW CG N
0.3	7.620	70790S	1.00	25.400	0.256	6.502	2.60	0.455	0.560	14.224	1.400	6.227	0.160	4.06	0.022	0.56	7.25	SST CG N
0.3	7.620	70812	1.00	25.400	0.248	6.299	5.10	0.893	0.650	16.510	3.300	14.678	0.220	5.59	0.026	0.66	8.38	MW CG N
0.3	7.620	70812S	1.00	25.400	0.248	6.299	4.30	0.753	0.510	12.954	2.200	9.786	0.220	5.59	0.026	0.66	8.38	SST CG N
0.3	7.620	70835	1.00	25.400	0.240	6.096	8.40	1.470	0.600	15.240	5.000	22.240	0.270	6.86	0.030	0.76	9.13	MW CG N
0.3	7.620	70835S	1.00	25.400	0.240	6.096	7.10	1.243	0.470	11.938	3.400	15.123	0.270	6.86	0.030	0.76	9.13	SST CG N
0.3	7.620	70857	1.00	25.400	0.236	5.994	10.00	1.750	0.590	14.986	6.100	27.133	0.310	7.87	0.032	0.81	9.63	MW CG N
0.3	7.620	70857S	1.00	25.400	0.236	5.994	8.80	1.540	0.470	11.938	4.100	18.237	0.310	7.87	0.032	0.81	9.63	SST CG N
0.3	7.620	70878	1.00	25.400	0.230	5.842	15.00	2.625	0.500	12.700	7.500	33.360	0.340	8.64	0.035	0.89	9.63	MW CG N
0.3	7.620	70878S	1.00	25.400	0.230	5.842	13.00	2.275	0.400	10.160	5.100	22.685	0.340	8.64	0.035	0.89	9.63	SST CG N
0.3	7.620	70897	1.00	25.400	0.224	5.690	21.00	3.675	0.460	11.684	9.600	42.701	0.380	9.65	0.038	0.97	10.00	MW CG N
0.3	7.620	70897S	1.00	25.400	0.224	5.690	18.00	3.150	0.370	9.398	6.500	28.912	0.380	9.65	0.038	0.97	10.00	SST CG N
0.3	7.620	70916	1.00	25.400	0.220	5.588	25.00	4.375	0.440	11.176	11.000	48.928	0.410	10.41	0.040	1.02	10.30	MW CG N
0.3	7.620	70916S	1.00	25.400	0.220	5.588	22.00	3.850	0.350	8.890	7.500	33.360	0.410	10.41	0.040	1.02	10.30	SST CG N
0.3	7.620	70935	1.00	25.400	0.216	5.486	30.00	5.250	0.430	10.922	13.000	57.824	0.450	11.43	0.042	1.07	10.60	MW CG N
0.3	7.620	70935S	1.00	25.400	0.216	5.486	26.00	4.550	0.340	8.636	8.700	38.698	0.450	11.43	0.042	1.07	10.60	SST CG N
0.3	7.620	70954	1.00	25.400	0.210	5.334	40.00	7.000	0.390	9.906	16.000	71.168	0.490	12.45	0.045	1.14	10.90	MW CG N
0.3	7.620	70954S	1.00	25.400	0.210	5.334	34.00	5.950	0.310	7.874	11.000	48.928	0.490	12.45	0.045	1.14	10.90	SST CG N
0.3	7.620	70973	1.00	25.400	0.206	5.232	50.00	8.750	0.350	8.890	18.000	80.064	0.500	12.70	0.047	1.19	10.60	MW CG N
0.3	7.620	70973S	1.00	25.400	0.206	5.232	43.00	7.525	0.280	7.112	12.000	53.376	0.500	12.70	0.047	1.19	10.60	SST CG N
0.3	7.620	70994	1.00	25.400	0.202	5.131	59.00	10.325	0.340	8.636	20.000	88.960	0.530	13.46	0.049	1.24	10.90	MW CG N
0.3	7.620	70994S	1.00	25.400	0.202	5.131	50.00	8.750	0.270	6.858	14.000	62.272	0.530	13.46	0.049	1.24	10.90	SST CG N
0.3	7.620	71015	1.00	25.400	0.198	5.029	70.00	12.250	0.300	7.620	21.000	93.408	0.560	14.22	0.051	1.30	11.00	MW CG N
0.3	7.620	71015S	1.00	25.400	0.198	5.029	60.00	10.500	0.240	6.096	14.000	62.272	0.560	14.22	0.051	1.30	11.00	SST CG N
0.3	7.620	70792	1.13	28.702	0.256	6.502	2.70	0.473	0.790	20.066	2.100	9.341	0.170	4.32	0.022	0.56	7.75	MW CG N
0.3	7.620	70792S	1.13	28.702	0.256	6.502	2.30	0.403	0.620	15.748	1.400	6.227	0.170	4.32	0.022	0.56	7.75	SST CG N
0.3	7.620	70814	1.13	28.702	0.248	6.299	4.60	0.805	0.720	18.288	3.300	14.678	0.230	5.84	0.026	0.66	9.00	MW CG N
0.3	7.620	70814S	1.13	28.702	0.248	6.299	3.90	0.683	0.570	14.478	2.200	9.786	0.230	5.84	0.026	0.66	9.00	SST CG N
0.3	7.620	70837	1.13	28.702	0.240	6.096	7.60	1.330	0.660	16.764	5.000	22.240	0.290	7.37	0.030	0.76	9.75	MW CG N
0.3	7.620	70837S	1.13	28.702	0.240	6.096	6.50	1.138	0.520	13.208	3.400	15.123	0.290	7.37	0.030	0.76	9.75	SST CG N
0.3	7.620	70859	1.13	28.702	0.236	5.994	9.50	1.663	0.640	16.256	6.100	27.133	0.330	8.38	0.032	0.81	10.30	MW CG N
0.3	7.620	70859S	1.13	28.702	0.236	5.994	8.10	1.418	0.500	12.700	4.100	18.237	0.330	8.38	0.032	0.81	10.30	SST CG N
0.3	7.620	70879	1.13	28.702	0.230	5.842	13.00	2.275	0.560	14.224	7.500	33.360	0.370	9.40	0.035	0.89	10.60	MW CG N
0.3	7.620	70879S	1.13	28.702	0.230	5.842	11.00	1.925	0.450	11.430	5.100	22.685	0.370	9.40	0.035	0.89	10.60	SST CG N
0.3	7.620	70898	1.13	28.702	0.224	5.690	19.00	3.325	0.510	12.954	9.600	42.701	0.410	10.41	0.038	0.97	10.90	MW CG N
0.3	7.620	70898S	1.13	28.702	0.224	5.690	16.00	2.800	0.410	10.414	6.500	28.912	0.410	10.41	0.038	0.97	10.90	SST CG N
0.3	7.620	70917	1.13	28.702	0.220	5.588	22.00	3.850	0.500	12.700	11.000	48.928	0.460	11.68	0.040	1.02	11.40	MW CG N
0.3	7.620	70917S	1.13	28.702	0.216	5.588	19.00	3.325	0.400	10.160	7.500	33.360	0.460	11.68	0.040	1.02	11.40	SST CG N
0.3	7.620	70936	1.13	28.702	0.216	5.486	23.00	4.025	0.370	9.398	8.700	38.698	0.480	12.19	0.042	1.07	11.50	SST CG N
0.3	7.620	70955	1.13	28.702	0.210	5.334	36.00	6.300	0.430	10.922	16.000	71.168	0.530	13.46	0.045	1.14	11.90	MW CG N
0.3	7.620	70955S	1.13	28.702	0.210	5.334	31.00	5.425	0.350	8.890	11.000	48.928	0.530	13.46	0.045	1.14	11.90	SST CG N
0.3	7.620	70974	1.13	28.702	0.206	5.232	44.00	7.700	0.400	10.160	18.000	80.064	0.550	13.97	0.047	1.19	11.80	MW CG N
0.3	7.620	70974S	1.13	28.702	0.206	5.232	38.00	6.650	0.320	8.128	12.000	53.376	0.550	13.97	0.047	1.19	11.80	SST CG N
0.3	7.620	70995	1.13	28.702	0.202	5.131	52.00	9.100	0.380	9.652	20.000	88.960	0.590	14.99	0.049	1.24		




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh								
0.3	7.620	70996	1.25	31.750	0.202	5.131	46.00	8.050	0.430	10.922	20.000	88.960	0.650	16.51	0.049	1.24	13.30	MW	CG	N
0.3	7.620	70996S	1.25	31.750	0.202	5.131	39.00	6.825	0.340	8.636	14.000	62.272	0.650	16.51	0.049	1.24	13.30	SST	CG	N
0.3	7.620	71017	1.25	31.750	0.198	5.029	55.00	9.625	0.380	9.652	21.000	93.408	0.690	17.53	0.051	1.30	13.50	MW	CG	N
0.3	7.620	71017S	1.25	31.750	0.198	5.029	47.00	8.225	0.310	7.874	14.000	62.272	0.690	17.53	0.051	1.30	13.50	SST	CG	N
0.3	7.620	70795	1.38	35.052	0.256	6.502	2.20	0.385	0.970	24.638	2.100	9.341	0.200	5.08	0.022	0.56	9.13	MW	CG	N
0.3	7.620	70795S	1.38	35.052	0.256	6.502	1.90	0.333	0.760	19.304	1.400	6.227	0.200	5.08	0.022	0.56	9.13	SST	CG	N
0.3	7.620	70817	1.38	35.052	0.248	6.299	3.80	0.665	0.870	22.098	3.300	14.678	0.270	6.86	0.026	0.66	10.40	MW	CG	N
0.3	7.620	70817S	1.38	35.052	0.248	6.299	3.20	0.560	0.680	17.272	2.200	9.786	0.270	6.86	0.026	0.66	10.40	SST	CG	N
0.3	7.620	70840	1.38	35.052	0.240	6.096	6.10	1.068	0.830	21.082	5.000	22.240	0.350	8.89	0.030	0.76	11.80	MW	CG	N
0.3	7.620	70840S	1.38	35.052	0.240	6.096	5.20	0.910	0.650	16.510	3.400	15.123	0.350	8.89	0.030	0.76	11.80	SST	CG	N
0.3	7.620	70862	1.38	35.052	0.236	5.994	7.70	1.348	0.790	20.066	6.100	27.133	0.390	9.91	0.032	0.81	12.10	MW	CG	N
0.3	7.620	70862S	1.38	35.052	0.236	5.994	6.50	1.138	0.620	15.748	4.100	18.237	0.390	9.91	0.032	0.81	12.10	SST	CG	N
0.3	7.620	70881	1.38	35.052	0.230	5.842	11.00	1.925	0.700	17.780	7.500	33.360	0.450	11.43	0.035	0.89	12.80	MW	CG	N
0.3	7.620	70881S	1.38	35.052	0.230	5.842	9.20	1.610	0.560	14.224	5.100	22.685	0.450	11.43	0.035	0.89	12.80	SST	CG	N
0.3	7.620	70900	1.38	35.052	0.224	5.690	15.00	2.625	0.640	16.256	9.600	42.701	0.500	12.70	0.038	0.97	13.10	MW	CG	N
0.3	7.620	70900S	1.38	35.052	0.224	5.690	13.00	2.275	0.510	12.954	6.500	28.912	0.500	12.70	0.038	0.97	13.10	SST	CG	N
0.3	7.620	70919	1.38	35.052	0.220	5.588	18.00	3.150	0.630	16.002	11.000	48.928	0.560	14.22	0.040	1.02	13.90	MW	CG	N
0.3	7.620	70919S	1.38	35.052	0.220	5.588	15.00	2.625	0.500	12.700	7.500	33.360	0.560	14.22	0.040	1.02	13.90	SST	CG	N
0.3	7.620	70938	1.38	35.052	0.216	5.486	22.00	3.850	0.590	14.986	13.000	57.824	0.580	14.73	0.042	1.07	13.90	MW	CG	N
0.3	7.620	70938S	1.38	35.052	0.216	5.486	19.00	3.325	0.470	11.938	8.700	38.698	0.580	14.73	0.042	1.07	13.90	SST	CG	N
0.3	7.620	70957	1.38	35.052	0.210	5.334	29.00	5.075	0.540	13.716	16.000	71.168	0.640	16.26	0.045	1.14	14.30	MW	CG	N
0.3	7.620	70957S	1.38	35.052	0.210	5.334	25.00	4.375	0.430	10.922	11.000	48.928	0.640	16.26	0.045	1.14	14.30	SST	CG	N
0.3	7.620	70976	1.38	35.052	0.206	5.232	35.00	6.125	0.500	12.700	18.000	80.064	0.670	17.02	0.047	1.19	14.30	MW	CG	N
0.3	7.620	70976S	1.38	35.052	0.206	5.232	30.00	5.250	0.400	10.160	12.000	53.376	0.670	17.02	0.047	1.19	14.30	SST	CG	N
0.3	7.620	70997	1.38	35.052	0.202	5.131	42.00	7.350	0.480	12.192	20.000	88.960	0.720	18.29	0.049	1.24	14.60	MW	CG	N
0.3	7.620	70997S	1.38	35.052	0.202	5.131	35.00	6.125	0.380	9.652	14.000	62.272	0.720	18.29	0.049	1.24	14.60	SST	CG	N
0.3	7.620	71018	1.38	35.052	0.198	5.029	49.00	8.575	0.430	10.922	21.000	93.408	0.750	19.05	0.051	1.30	14.80	MW	CG	N
0.3	7.620	71018S	1.38	35.052	0.198	5.029	42.00	7.350	0.340	8.636	14.000	62.272	0.750	19.05	0.051	1.30	14.80	SST	CG	N
0.3	7.620	70796	1.50	38.100	0.256	6.502	2.10	0.368	1.000	25.400	2.100	9.341	0.210	5.33	0.022	0.56	9.63	MW	CG	N
0.3	7.620	70796S	1.50	38.100	0.256	6.502	1.70	0.298	0.810	20.574	1.400	6.227	0.210	5.33	0.022	0.56	9.63	SST	CG	N
0.3	7.620	70818	1.50	38.100	0.248	6.299	3.50	0.613	0.940	23.876	3.300	14.678	0.290	7.37	0.026	0.66	11.10	MW	CG	N
0.3	7.620	70818S	1.50	38.100	0.248	6.299	3.00	0.525	0.740	18.796	2.200	9.786	0.290	7.37	0.026	0.66	11.10	SST	CG	N
0.3	7.620	70841	1.50	38.100	0.240	6.096	5.50	0.963	0.920	23.368	5.000	22.240	0.390	9.91	0.030	0.76	12.90	MW	CG	N
0.3	7.620	70841S	1.50	38.100	0.240	6.096	4.60	0.805	0.730	18.542	3.400	15.123	0.390	9.91	0.030	0.76	12.90	SST	CG	N
0.3	7.620	70863	1.50	38.100	0.236	5.994	7.10	1.243	0.860	21.844	6.100	27.133	0.420	10.67	0.032	0.81	13.10	MW	CG	N
0.3	7.620	70882	1.50	38.100	0.230	5.842	9.90	1.733	0.760	19.304	7.500	33.360	0.480	12.19	0.035	0.89	13.80	MW	CG	N
0.3	7.620	70882S	1.50	38.100	0.230	5.842	8.40	1.470	0.610	15.494	5.100	22.685	0.480	12.19	0.035	0.89	13.80	SST	CG	N
0.3	7.620	70901	1.50	38.100	0.224	5.690	14.00	2.450	0.700	17.780	9.600	42.701	0.540	13.72	0.038	0.97	14.10	MW	CG	N
0.3	7.620	70901S	1.50	38.100	0.224	5.690	12.00	2.100	0.560	14.224	6.500	28.912	0.540	13.72	0.038	0.97	14.10	SST	CG	N
0.3	7.620	70920	1.50	38.100	0.220	5.588	16.00	2.800	0.700	17.780	11.000	48.928	0.610	15.49	0.040	1.02	15.10	MW	CG	N
0.3	7.620	70920S	1.50	38.100	0.220	5.588	14.00	2.450	0.550	13.970	7.500	33.360	0.610	15.49	0.040	1.02	15.10	SST	CG	N
0.3	7.620	70939	1.50	38.100	0.216	5.486	20.00	3.500	0.650	16.510	13.000	57.824	0.640	16.26	0.042	1.07	15.10	MW	CG	N
0.3	7.620	70939S	1.50	38.100	0.216	5.486	17.00	2.975	0.510	12.954	8.700	38.698	0.640	16.26	0.042	1.07	15.10	SST	CG	N
0.3	7.620	70958	1.50	38.100	0.210	5.334	26.00	4.550	0.600	15.240	16.000	71.168	0.700	17.78	0.045	1.14	15.50	MW	CG	N
0.3	7.620	70958S	1.50	38.100	0.210	5.334	22.00	3.850	0.480	12.192	11.000	48.928	0.700	17.78	0.045	1.14	15.50	SST	CG	N
0.3	7.620	12758	1.50	38.100	0.206	5.232	27.00	4.725	0.440	11.176	12.000	53.376	0.740	18.80	0.047	1.19	15.80	SST	CG	N
0.3	7.620	70977	1.50	38.100	0.206	5.232	32.00	5.600	0.550	13.970	18.000	80.064	0.720	18.29	0.047	1.19	15.40	MW	CG	N
0.3	7.620	70977S	1.50	38.100	0.206	5.232	27.00	4.725	0.440	11.176	12.000	53.376	0.720	18.29	0.047	1.19	15.40	SST	CG	N
0.3	7.620	70998	1.50	38.100	0.202	5.131	38.00	6.650	0.530	13.462	20.000	88.960	0.770	19.56	0.049	1.24	15.80	MW	CG	N
0.3	7.620	70998S	1.50	38.100	0.202	5.131	32.00	5.600	0.420	10.668	14.000	62.272	0.770	19.56	0.049	1.24	15.80	SST	CG	N
0.3	7.620	71019	1.50	38.100	0.198	5.029	45.00	7.875	0.470	11.938	21.000	93.408	0.820	20.83	0.051	1.30	16.00	MW	CG	N
0.3	7.620	71019S	1.50	38.100	0.198	5.029	38.00	6.650	0.370	9.398	14.000	62.272	0.820	20.83	0.051	1.30	16.00	SST	CG	N
0.3	7.620	70797	1.75	44.450	0.256	6.502	1.70	0.298	1.200	30.480	2.100	9.341	0.240	6.10	0.022	0.56	11.10	MW	CG	N
0.3	7.620	70797S	1.75																	




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.3	7.620	70820S	2.00	50.800	0.248	6.299	2.20	0.385	1.000	25.400	2.200	9.786	0.370	9.40	0.026	0.66	14.30	SST CG N
0.3	7.620	70843	2.00	50.800	0.240	6.096	4.00	0.700	1.300	33.020	5.000	22.240	0.500	12.70	0.030	0.76	16.80	MW CG N
0.3	7.620	70843S	2.00	50.800	0.240	6.096	3.40	0.595	0.990	25.146	3.400	15.123	0.500	12.70	0.030	0.76	16.80	SST CG N
0.3	7.620	70865	2.00	50.800	0.236	5.994	5.30	0.928	1.100	27.940	6.100	27.133	0.540	13.72	0.032	0.81	16.80	MW CG N
0.3	7.620	70865S	2.00	50.800	0.236	5.994	4.50	0.788	0.900	22.860	4.100	18.237	0.540	13.72	0.032	0.81	16.80	SST CG N
0.3	7.620	70884	2.00	50.800	0.230	5.842	7.30	1.278	1.000	25.400	7.500	33.360	0.630	16.00	0.035	0.89	17.90	MW CG N
0.3	7.620	70884S	2.00	50.800	0.230	5.842	6.20	1.085	0.820	20.828	5.100	22.685	0.630	16.00	0.035	0.89	17.90	SST CG N
0.3	7.620	70903	2.00	50.800	0.224	5.690	9.60	1.680	1.000	25.400	9.600	42.701	0.740	18.80	0.038	0.97	19.40	MW CG N
0.3	7.620	70903S	2.00	50.800	0.224	5.690	8.20	1.435	0.790	20.066	6.500	28.912	0.740	18.80	0.038	0.97	19.40	SST CG N
0.3	7.620	70922	2.00	50.800	0.220	5.588	12.00	2.100	0.940	23.876	11.000	48.928	0.790	20.07	0.040	1.02	19.60	MW CG N
0.3	7.620	70922S	2.00	50.800	0.220	5.588	10.00	1.750	0.740	18.796	7.500	33.360	0.790	20.07	0.040	1.02	19.60	SST CG N
0.3	7.620	70941	2.00	50.800	0.216	5.486	14.00	2.450	0.890	22.606	13.000	57.824	0.850	21.59	0.042	1.07	20.10	MW CG N
0.3	7.620	70941S	2.00	50.800	0.216	5.486	12.00	2.100	0.710	18.034	8.700	38.698	0.850	21.59	0.042	1.07	20.10	SST CG N
0.3	7.620	70960	2.00	50.800	0.210	5.334	19.00	3.325	0.830	21.082	16.000	71.168	0.940	23.88	0.045	1.14	20.90	MW CG N
0.3	7.620	70960S	2.00	50.800	0.210	5.334	16.00	2.800	0.660	16.764	11.000	48.928	0.940	23.88	0.045	1.14	20.90	SST CG N
0.3	7.620	70979	2.00	50.800	0.206	5.232	24.00	4.200	0.740	18.796	18.000	80.064	0.950	24.13	0.047	1.19	20.10	MW CG N
0.3	7.620	70979S	2.00	50.800	0.206	5.232	20.00	3.500	0.590	14.986	12.000	53.376	0.950	24.13	0.047	1.19	20.10	SST CG N
0.3	7.620	71000	2.00	50.800	0.202	5.131	28.00	4.900	0.710	18.034	20.000	88.960	1.010	25.65	0.049	1.24	20.60	MW CG N
0.3	7.620	71000S	2.00	50.800	0.202	5.131	24.00	4.200	0.570	14.478	14.000	62.272	1.010	25.65	0.049	1.24	20.60	SST CG N
0.3	7.620	71021	2.00	50.800	0.198	5.029	33.00	5.775	0.640	16.256	21.000	93.408	1.070	27.18	0.051	1.30	21.00	MW CG N
0.3	7.620	71021S	2.00	50.800	0.198	5.029	28.00	4.900	0.510	12.954	14.000	62.272	1.070	27.18	0.051	1.30	21.00	SST CG N
0.3	7.620	70799	2.25	57.150	0.256	6.502	1.30	0.228	1.600	40.640	2.100	9.341	0.310	7.87	0.022	0.56	14.00	MW CG N
0.3	7.620	70799S	2.25	57.150	0.256	6.502	1.10	0.193	1.300	33.020	1.400	6.227	0.310	7.87	0.022	0.56	14.00	SST CG N
0.3	7.620	70821	2.25	57.150	0.248	6.299	2.40	0.420	1.400	35.560	3.300	14.678	0.400	10.16	0.026	0.66	15.30	MW CG N
0.3	7.620	70821S	2.25	57.150	0.248	6.299	2.00	0.350	1.100	27.940	2.200	9.786	0.400	10.16	0.026	0.66	15.30	SST CG N
0.3	7.620	70844	2.25	57.150	0.240	6.096	3.60	0.630	1.400	35.560	5.000	22.240	0.560	14.22	0.030	0.76	18.60	MW CG N
0.3	7.620	70844S	2.25	57.150	0.240	6.096	3.00	0.525	1.100	27.940	3.400	15.123	0.560	14.22	0.030	0.76	18.60	SST CG N
0.3	7.620	70866	2.25	57.150	0.236	5.994	4.80	0.840	1.300	33.020	6.100	27.133	0.590	14.99	0.032	0.81	18.40	MW CG N
0.3	7.620	70866S	2.25	57.150	0.236	5.994	4.10	0.718	1.000	25.400	4.100	18.237	0.590	14.99	0.032	0.81	18.40	SST CG N
0.3	7.620	70885	2.25	57.150	0.230	5.842	6.50	1.138	1.200	30.480	7.500	33.360	0.700	17.78	0.035	0.89	20.00	MW CG N
0.3	7.620	70885S	2.25	57.150	0.230	5.842	5.50	0.963	0.930	23.622	5.100	22.685	0.700	17.78	0.035	0.89	20.00	SST CG N
0.3	7.620	70904	2.25	57.150	0.224	5.690	8.80	1.540	1.100	27.940	9.600	42.701	0.800	20.32	0.038	0.97	21.00	MW CG N
0.3	7.620	70904S	2.25	57.150	0.224	5.690	7.50	1.313	0.870	22.098	6.500	28.912	0.800	20.32	0.038	0.97	21.00	SST CG N
0.3	7.620	70923	2.25	57.150	0.220	5.588	11.00	1.925	1.100	27.940	11.000	48.928	0.880	22.35	0.040	1.02	21.90	MW CG N
0.3	7.620	70923S	2.25	57.150	0.220	5.588	9.00	1.575	0.840	21.336	7.500	33.360	0.880	22.35	0.040	1.02	21.90	SST CG N
0.3	7.620	70942	2.25	57.150	0.216	5.486	13.00	2.275	1.000	25.400	13.000	57.824	0.940	23.88	0.042	1.07	22.40	MW CG N
0.3	7.620	70942S	2.25	57.150	0.216	5.486	11.00	1.925	0.800	20.320	8.700	38.698	0.940	23.88	0.042	1.07	22.40	SST CG N
0.3	7.620	70961	2.25	57.150	0.210	5.334	17.00	2.975	0.930	23.622	16.000	71.168	1.040	26.42	0.045	1.14	23.10	MW CG N
0.3	7.620	70961S	2.25	57.150	0.210	5.334	14.00	2.450	0.740	18.796	11.000	48.928	1.040	26.42	0.045	1.14	23.10	SST CG N
0.3	7.620	70980	2.25	57.150	0.206	5.232	21.00	3.675	0.840	21.336	18.000	80.064	1.060	26.92	0.047	1.19	22.50	MW CG N
0.3	7.620	70980S	2.25	57.150	0.206	5.232	18.00	3.150	0.670	17.018	12.000	53.376	1.060	26.92	0.047	1.19	22.50	SST CG N
0.3	7.620	71001	2.25	57.150	0.202	5.131	25.00	4.375	0.810	20.574	20.000	88.960	1.130	28.70	0.049	1.24	23.10	MW CG N
0.3	7.620	71001S	2.25	57.150	0.202	5.131	21.00	3.675	0.640	16.256	14.000	62.272	1.130	28.70	0.049	1.24	23.10	SST CG N
0.3	7.620	71022	2.25	57.150	0.198	5.029	29.00	5.075	0.720	18.288	21.000	93.408	1.200	30.48	0.051	1.30	23.50	MW CG N
0.3	7.620	71022S	2.25	57.150	0.198	5.029	25.00	4.375	0.570	14.478	14.000	62.272	1.200	30.48	0.051	1.30	23.50	SST CG N
0.3	7.620	70980	2.50	63.500	0.256	6.502	1.20	0.210	1.800	45.720	2.100	9.341	0.340	8.64	0.022	0.56	15.30	MW CG N
0.3	7.620	70800S	2.50	63.500	0.256	6.502	1.00	0.175	1.400	35.560	1.400	6.227	0.340	8.64	0.022	0.56	15.30	SST CG N
0.3	7.620	70822	2.50	63.500	0.248	6.299	2.10	0.368	1.500	38.100	3.300	14.678	0.440	11.18	0.026	0.66	16.90	MW CG N
0.3	7.620	70822S	2.50	63.500	0.248	6.299	1.80	0.315	1.200	30.480	2.200	9.786	0.440	11.18	0.026	0.66	16.90	SST CG N
0.3	7.620	70845	2.50	63.500	0.240	6.096	3.20	0.560	1.600	40.640	5.000	22.240	0.610	15.49	0.030	0.76	20.30	MW CG N
0.3	7.620	70845S	2.50	63.500	0.240	6.096	2.80	0.490	1.200	30.480	3.400	15.123	0.610	15.49	0.030	0.76	20.30	SST CG N
0.3	7.620	70867	2.50	63.500	0.236	5.994	4.30	0.753	1.400	35.560	6.100	27.133	0.650	16.51	0.032	0.81	20.40	MW CG N
0.3	7.620	70867S	2.50	63.500	0.236	5.994	3.60	0.630	1.100	27.940	4.100	18.237	0.650	16.51	0.032	0.81	20.40	SST CG N
0.3	7.620	70886	2.50	63.500	0.230	5.842	5.90	1.033	1.300	33.020	7.500	33.360	0.770	19.56	0.035	0.89	21.90	MW CG N
0.3	7.620	70886S	2.50	63.500	0.230	5.842	5.00	0.875	1.000	25.400	5.100	22.685	0.770	19.56	0.035	0.89	21.90	SST CG N
0.3	7.620	70905	2.50	63.500	0.224	5.690	8.00	1.400	1.200	30.480	9.600	42.701	0.870</					




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	E n d s	F n sh								
0.3	7.620	71025	3.00	76.200	0.198	5.029	22.00	3.850	0.970	24.638	21.000	93.408	1.580	40.13	0.051	1.30	31.00	MW	CG	N
0.3	7.620	71025S	3.00	76.200	0.198	5.029	18.00	3.150	0.770	19.558	14.000	62.272	1.580	40.13	0.051	1.30	31.00	SST	CG	N
0.304	7.722	A9-39	0.78	19.812	0.190	4.826	93.00	16.275	0.220	5.588	21.000	93.408	0.460	11.68	0.057	1.45	8.00	PB	CG	N
0.312	7.925	II-25	0.19	4.826	0.252	6.401	45.00	7.875	0.070	1.778	3.100	13.789	0.120	3.05	0.030	0.76	3.00	SST	C	N
0.312	7.925	KK-86	0.22	5.588	0.260	6.604	17.00	2.975	0.100	2.540	1.700	7.562	0.120	3.05	0.026	0.66	3.50	SST	C	N
0.312	7.925	NN-86	0.25	6.350	0.258	6.553	17.00	2.975	0.120	3.048	1.900	8.451	0.140	3.56	0.027	0.69	4.00	MW	C	N
0.312	7.925	A15-5	0.25	6.350	0.252	6.401	16.00	2.800	0.100	2.540	1.600	7.117	0.150	3.81	0.030	0.76	5.00	SST	CG	N
0.312	7.925	EE-4	0.25	6.350	0.232	5.893	80.00	14.000	0.090	2.286	7.200	32.026	0.160	4.06	0.040	1.02	4.00	SST	CG	N
0.312	7.925	S-1267	0.31	7.874	0.288	7.315	0.26	0.046	0.230	5.842	0.060	0.267	0.080	2.03	0.012	0.30	5.75	SST	C	N
0.312	7.925	A-81	0.31	7.874	0.262	6.655	12.00	2.100	0.190	4.826	2.200	9.786	0.130	3.30	0.025	0.64	4.00	MW	C	Z
0.312	7.925	12482	0.31	7.874	0.248	6.299	46.00	8.050	0.090	2.286	4.200	18.682	0.140	3.56	0.032	0.81	3.50	SPR	C	N
0.312	7.925	GG-15	0.31	7.874	0.202	5.131	344.00	60.200	0.050	1.270	17.000	75.616	0.220	5.59	0.055	1.40	4.00	SST	CG	N
0.312	7.925	Y-74	0.34	8.636	0.234	5.944	47.00	8.225	0.140	3.556	6.700	29.802	0.200	5.08	0.039	0.99	5.00	SST	CG	N
0.312	7.925	B15-32	0.34	8.636	0.184	4.674	632.00	110.600	0.040	1.016	28.000	124.544	0.290	7.37	0.064	1.63	4.50	SPR	CG	N
0.312	7.925	CC-58	0.38	9.652	0.292	7.417	0.23	0.040	0.330	8.382	0.070	0.311	0.050	1.27	0.010	0.25	4.00	SST	C	N
0.312	7.925	II-11	0.38	9.652	0.272	6.909	1.50	0.263	0.200	5.080	0.300	1.334	0.180	4.57	0.020	0.51	8.00	MW	C	N
0.312	7.925	PP-41	0.38	9.652	0.272	6.909	2.10	0.368	0.240	6.096	0.500	2.224	0.140	3.56	0.020	0.51	6.00	SST	C	N
0.312	7.925	10274	0.38	9.652	0.268	6.807	6.90	1.208	0.290	7.366	2.000	8.896	0.090	2.29	0.022	0.56	4.00	MW	CG	Z
0.312	7.925	11356	0.38	9.652	0.266	6.756	3.30	0.578	0.230	5.842	0.740	3.292	0.150	3.81	0.023	0.58	6.50	SST	CG	N
0.312	7.925	EE-48	0.38	9.652	0.266	6.756	2.80	0.490	0.170	4.318	0.470	2.091	0.210	5.33	0.023	0.58	8.00	MW	C	Z
0.312	7.925	00-35	0.38	9.652	0.264	6.706	5.80	1.015	0.230	5.842	1.300	5.782	0.140	3.56	0.024	0.61	5.00	SST	C	N
0.312	7.925	0-87	0.38	9.652	0.256	6.502	13.00	2.275	0.240	6.096	3.000	13.344	0.140	3.56	0.028	0.71	5.00	MW	CG	N
0.312	7.925	Z-78	0.38	9.652	0.242	6.147	51.00	8.925	0.100	2.540	5.200	23.130	0.140	3.56	0.035	0.89	4.00	SPR	CG	N
0.312	7.925	2915	0.38	9.652	0.228	5.791	76.00	13.300	0.120	3.048	8.900	39.587	0.250	6.35	0.042	1.07	5.00	SPR	C	Z
0.312	7.925	EE-9	0.38	9.652	0.226	5.740	101.00	17.675	0.090	2.286	9.600	42.701	0.190	4.83	0.043	1.09	4.50	SPR	CG	Z
0.312	7.925	S-1086	0.38	9.652	0.218	5.537	131.00	22.925	0.090	2.286	12.000	53.376	0.210	5.33	0.047	1.19	4.50	SST	CG	N
0.312	7.925	S-1125	0.38	9.652	0.214	5.436	158.00	27.650	0.080	2.032	13.000	57.824	0.220	5.59	0.049	1.24	4.50	SST	CG	N
0.312	7.925	3688	0.41	10.414	0.272	6.909	2.30	0.403	0.270	6.858	0.610	2.713	0.140	3.56	0.020	0.51	6.00	MW	C	Z
0.312	7.925	JJ-22	0.41	10.414	0.244	6.198	26.00	4.550	0.180	4.572	4.700	20.906	0.200	5.08	0.034	0.86	5.00	SST	C	N
0.312	7.925	FF-3	0.44	11.176	0.280	7.112	0.91	0.159	0.330	8.382	0.300	1.334	0.110	2.79	0.016	0.41	6.00	MW	C	N
0.312	7.925	KK-92	0.44	11.176	0.252	6.401	11.00	1.925	0.230	5.842	2.600	11.565	0.210	5.33	0.030	0.76	6.00	SST	C	N
0.312	7.925	A11-23	0.44	11.176	0.246	6.248	26.00	4.550	0.180	4.572	4.600	20.461	0.170	4.32	0.033	0.84	5.00	SPR	CG	GI
0.312	7.925	A14-25	0.44	11.176	0.236	5.994	39.00	6.825	0.160	4.064	6.240	27.756	0.120	3.05	0.038	0.97	5.25	SST	CG	N
0.312	7.925	LL-16	0.44	11.176	0.232	5.893	41.00	7.175	0.180	4.572	7.300	32.470	0.240	6.10	0.040	1.02	6.00	SST	CG	N
0.312	7.925	B9-30	0.44	11.176	0.230	5.842	82.00	14.350	0.100	2.540	8.300	36.918	0.180	4.57	0.041	1.04	4.50	SPR	CG	N
0.312	7.925	S-484	0.44	11.176	0.230	5.842	43.00	7.525	0.180	4.572	7.800	34.694	0.250	6.35	0.041	1.04	6.13	SST	CG	N
0.312	7.925	H-96	0.44	11.176	0.212	5.385	167.00	29.225	0.080	2.032	14.000	62.272	0.250	6.35	0.050	1.27	5.00	SPR	CG	Z
0.312	7.925	2920	0.44	11.176	0.180	4.572	697.00	121.975	0.040	1.016	30.000	133.440	0.310	7.87	0.066	1.68	4.63	SPR	CG	Z
0.312	7.925	NN-6	0.47	11.938	0.272	6.909	2.00	0.350	0.330	8.382	0.670	2.980	0.140	3.56	0.020	0.51	6.00	SST	C	N
0.312	7.925	J-27	0.47	11.938	0.252	6.401	11.00	1.925	0.260	6.604	2.900	12.899	0.210	5.33	0.030	0.76	6.00	SST	C	N
0.312	7.925	A10-36	0.47	11.938	0.250	6.350	18.00	3.150	0.200	5.080	3.600	16.013	0.160	4.06	0.031	0.79	5.00	SST	CG	N
0.312	7.925	DD-85	0.47	11.938	0.242	6.147	29.00	5.075	0.170	4.318	4.900	21.795	0.210	5.33	0.035	0.89	5.00	SST	C	N
0.312	7.925	J-52	0.47	11.938	0.238	6.045	43.00	7.525	0.140	3.556	6.200	27.578	0.220	5.59	0.037	0.94	5.00	SPR	C	N
0.312	7.925	10487	0.50	12.700	0.284	7.214	1.00	0.175	0.430	10.922	0.450	2.002	0.070	1.78	0.014	0.36	4.00	MW	C	N
0.312	7.925	4231	0.50	12.700	0.282	7.163	0.51	0.089	0.370	9.398	0.190	0.845	0.130	3.30	0.015	0.38	7.50	MW	C	N
0.312	7.925	4199	0.50	12.700	0.276	7.010	1.20	0.210	0.360	9.144	0.420	1.868	0.140	3.56	0.018	0.46	7.00	MW	C	Z
0.312	7.925	H-69	0.50	12.700	0.272	6.909	1.40	0.245	0.320	8.128	0.440	1.957	0.180	4.57	0.020	0.51	8.00	SST	C	N
0.312	7.925	B14-5	0.50	12.700	0.270	6.858	2.30	0.403	0.350	8.890	0.800	3.558	0.150	3.81	0.021	0.53	7.00	MW	CG	N
0.312	7.925	S-727	0.50	12.700	0.268	6.807	4.80	0.840	0.280	7.112	1.400	6.227	0.120	3.05	0.022	0.56	4.50	SST	C	N
0.312	7.925	B2-28	0.50	12.700	0.266	6.756	7.40	1.295	0.320	8.128	2.300	10.230	0.120	3.05	0.023	0.58	4.25	MW	C	N
0.312	7.925	PP-31	0.50	12.700	0.256	6.502	13.00	2.275	0.310	7.874	4.000	17.792	0.140	3.56	0.028	0.71	5.00	MW	CG	N
0.312	7.925	10229	0.50	12.700	0.248	6.299	17.00	2.975	0.250	6.350	4.200	18.682	0.220	5.59	0.032	0.81	6.00	SPR	C	Z
0.312	7.925	931	0.50	12.700	0.238	6.045	37.00	6.475	0.230	5.842	8.500	37.808	0.200	5.08	0.037	0.94	5.50	MW	CG	Z
0.312	7.925	L-8	0.50	12.700	0.236	5.994	42.00	7.350	0.150	3.810	6.300	28.022	0.230	5.84	0.038	0.97	5			




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h
0.312	7.925 WW-32	0.63 16.002	0.236 5.994	32.00 5.600	0.200 5.080	6.300 28.022	0.230 5.84	0.038 0.97	6.00	SST CG	N	
0.312	7.925 A14-22	0.63 16.002	0.230 5.842	41.00 7.175	0.200 5.080	8.300 36.918	0.290 7.37	0.041 1.04	7.00	SPR CG	GI	
0.312	7.925 S-1065	0.63 16.002	0.204 5.182	124.00 21.700	0.130 3.302	16.000 71.168	0.380 9.65	0.054 1.37	7.00	SST CG	N	
0.312	7.925 S-1226	0.63 16.002	0.188 4.775	278.00 48.650	0.088 2.235	24.000 106.752	0.401 10.19	0.063 1.59	6.40	SST CG	N	
0.312	7.925 2846	0.66 16.764	0.272 6.909	2.30 0.403	0.520 13.208	1.200 5.338	0.140 3.56	0.020 0.51	6.00	MW C	Z	
0.312	7.925 I-42	0.66 16.764	0.238 6.045	16.00 2.800	0.320 8.128	5.300 23.574	0.330 8.38	0.037 0.94	9.00	SST CG	N	
0.312	7.925 2700	0.66 16.764	0.230 5.842	45.00 7.875	0.180 4.572	8.300 36.918	0.270 6.86	0.041 1.04	6.50	HD CG	Z	
0.312	7.925 A15-41	0.66 16.764	0.230 5.842	48.00 8.400	0.160 4.064	7.800 34.694	0.240 6.10	0.041 1.04	5.75	SST CG	N	
0.312	7.925 XX-25	0.69 17.526	0.256 6.502	7.70 1.348	0.460 11.684	3.600 16.013	0.220 5.59	0.028 0.71	7.00	MW C	GI	
0.312	7.925 4245	0.69 17.526	0.254 6.452	7.50 1.313	0.430 10.922	3.200 14.234	0.260 6.60	0.029 0.74	8.00	MW C	Z	
0.312	7.925 HH-73	0.69 17.526	0.242 6.147	18.00 3.150	0.280 7.112	5.200 23.130	0.300 7.62	0.035 0.89	7.50	SPR C	GI	
0.312	7.925 10013	0.69 17.526	0.236 5.994	24.00 4.200	0.270 6.858	6.700 29.802	0.300 7.62	0.038 0.97	8.00	SPR CG	Z	
0.312	7.925 BB-2	0.69 17.526	0.232 5.893	23.00 4.025	0.310 7.874	7.300 32.470	0.360 9.14	0.040 1.02	9.00	SST CG	N	
0.312	7.925 KK-22	0.69 17.526	0.232 5.893	41.00 7.175	0.190 4.826	7.800 34.694	0.260 6.60	0.040 1.02	6.50	SPR CG	Z	
0.312	7.925 B7-2	0.69 17.526	0.226 5.740	53.00 9.275	0.180 4.572	9.600 42.701	0.290 7.37	0.043 1.09	6.75	SPR CG	N	
0.312	7.925 B9-38	0.69 17.526	0.220 5.588	53.00 9.275	0.220 5.588	12.000 53.376	0.390 9.91	0.046 1.17	8.50	SPR CG	Z	
0.312	7.925 W-70	0.69 17.526	0.220 5.588	54.00 9.450	0.200 5.080	11.000 48.928	0.350 8.89	0.046 1.17	7.50	SST CG	N	
0.312	7.925 L-39	0.69 17.526	0.216 5.486	64.00 11.200	0.210 5.334	13.000 57.824	0.410 10.41	0.048 1.22	8.50	SPR CG	Z	
0.312	7.925 O-48	0.69 17.526	0.212 5.385	67.00 11.725	0.190 4.826	13.000 57.824	0.430 10.92	0.050 1.27	8.50	SST CG	N	
0.312	7.925 Z-32	0.69 17.526	0.188 4.775	197.00 34.475	0.113 2.870	22.000 97.856	0.577 14.66	0.063 1.59	8.20	SST C	N	
0.312	7.925 3516	0.69 17.526	0.184 4.674	243.00 42.525	0.110 2.794	28.000 124.544	0.540 13.72	0.064 1.63	8.50	SPR CG	Z	
0.312	7.925 KK-74	0.72 18.288	0.240 6.096	15.00 2.625	0.340 8.636	5.200 23.130	0.380 9.65	0.036 0.91	9.50	SPR C	N	
0.312	7.925 4246	0.75 19.050	0.282 7.163	0.35 0.061	0.590 14.986	0.200 0.890	0.170 4.32	0.015 0.38	10.00	MW C	Z	
0.312	7.925 S-1072	0.75 19.050	0.282 7.163	0.24 0.042	0.560 14.224	0.130 0.578	0.200 5.08	0.015 0.38	12.00	SST C	N	
0.312	7.925 S-23	0.75 19.050	0.278 7.061	0.81 0.142	0.610 15.494	0.500 2.224	0.140 3.56	0.017 0.43	7.00	SST C	N	
0.312	7.925 10422	0.75 19.050	0.274 6.960	0.85 0.149	0.600 15.240	0.510 2.268	0.150 3.81	0.019 0.48	6.75	PB C	N	
0.312	7.925 B12-32	0.75 19.050	0.272 6.909	1.50 0.263	0.570 14.478	0.880 3.914	0.180 4.57	0.020 0.51	8.00	MW C	N	
0.312	7.925 FF-25	0.75 19.050	0.272 6.909	0.46 0.081	0.310 7.874	0.140 0.623	0.440 11.18	0.020 0.51	22.00	MW CG	N	
0.312	7.925 S-728	0.75 19.050	0.268 6.807	3.20 0.560	0.430 10.922	1.400 6.227	0.150 3.81	0.022 0.56	5.75	SST C	N	
0.312	7.925 WW-44	0.75 19.050	0.268 6.807	3.50 0.613	0.600 15.240	2.100 9.341	0.150 3.81	0.022 0.56	6.00	MW C	N	
0.312	7.925 2539	0.75 19.050	0.266 6.756	3.70 0.648	0.580 14.732	2.100 9.341	0.170 4.32	0.023 0.58	6.50	MW C	Z	
0.312	7.925 FF-93	0.75 19.050	0.264 6.706	1.90 0.333	0.460 11.684	0.890 3.959	0.290 7.37	0.024 0.61	11.00	SST C	N	
0.312	7.925 II-29	0.75 19.050	0.264 6.706	4.00 0.700	0.560 14.224	2.200 9.786	0.190 4.83	0.024 0.61	7.00	MW C	Z	
0.312	7.925 Z-65	0.75 19.050	0.262 6.655	4.00 0.700	0.530 13.462	2.100 9.341	0.230 5.84	0.025 0.64	8.00	MW C	Z	
0.312	7.925 3245	0.75 19.050	0.258 6.553	6.60 1.155	0.530 13.462	3.500 15.568	0.220 5.59	0.027 0.69	7.00	MW C	Z	
0.312	7.925 946	0.75 19.050	0.248 6.299	13.00 2.275	0.450 11.430	5.900 26.243	0.260 6.60	0.032 0.81	7.25	MW C	Z	
0.312	7.925 3190	0.75 19.050	0.248 6.299	9.80 1.715	0.460 11.684	4.500 20.016	0.290 7.37	0.032 0.81	9.00	MW CG	GI	
0.312	7.925 S-730	0.75 19.050	0.248 6.299	11.00 1.925	0.350 8.890	3.900 17.347	0.260 6.60	0.032 0.81	7.25	SST C	N	
0.312	7.925 W-17	0.75 19.050	0.246 6.248	13.00 2.275	0.350 8.890	4.600 20.461	0.300 7.62	0.033 0.84	8.00	SPR C	N	
0.312	7.925 2978	0.75 19.050	0.244 6.198	9.90 1.733	0.380 9.652	3.700 16.458	0.370 9.40	0.034 0.86	11.00	SPR CG	Z	
0.312	7.925 S-146	0.75 19.050	0.242 6.147	13.00 2.275	0.390 9.906	4.900 21.795	0.350 8.89	0.035 0.89	9.00	SST C	N	
0.312	7.925 S-934	0.75 19.050	0.242 6.147	14.00 2.450	0.350 8.890	4.900 21.795	0.290 7.37	0.035 0.89	8.25	SST CG	N	
0.312	7.925 2585	0.75 19.050	0.238 6.045	20.00 3.500	0.430 10.922	8.500 37.808	0.310 7.87	0.037 0.94	8.50	MW CG	Z	
0.312	7.925 B1-5	0.75 19.050	0.236 5.994	21.00 3.675	0.300 7.620	6.300 28.022	0.310 7.87	0.038 0.97	8.25	SST CG	N	
0.312	7.925 B12-1	0.75 19.050	0.228 5.791	35.00 6.125	0.260 6.604	8.900 39.587	0.360 9.14	0.042 1.07	8.50	SPR CG	N	
0.312	7.925 0-123	0.75 19.050	0.220 5.588	57.00 9.975	0.200 5.080	12.000 53.376	0.370 9.40	0.046 1.17	8.00	SPR CG	Z	
0.312	7.925 B17-125	0.75 19.050	0.216 5.486	69.00 12.075	0.190 4.826	13.000 57.824	0.380 9.65	0.048 1.22	8.00	SPR CG	Z	
0.312	7.925 O-32	0.75 19.050	0.210 5.334	137.00 23.975	0.110 2.794	15.000 66.720	0.310 7.87	0.051 1.30	6.00	SPR CG	Z	
0.312	7.925 S-204	0.78 19.812	0.272 6.909	0.82 0.144	0.520 13.208	0.430 1.913	0.260 6.60	0.020 0.51	12.00	SST C	N	
0.312	7.925 FF-45	0.78 19.812	0.252 6.401	8.70 1.523	0.540 13.716	4.700 20.906	0.240 6.10	0.030 0.76	8.00	MW CG	Z	
0.312	7.925 NN-30	0.78 19.812	0.252 6.401	8.70 1.523	0.540 13.716	4.700 20.906	0.240 6.10	0.030 0.76	8.00	MW CG	N	
0.312	7.925 S-877	0.78 19.812	0.218 5.537	56.00 9.800	0.210 5.334	12.000 53.376	0.380 9.65	0.047 1.19	8.00	SST CG	N	
0.312	7.925 2617	0.78 19.812	0.188 4.775	175.00 30.625	0.150 3.810	26.000 115.648	0.600 15.24	0.062 1.57	9.75	HD CG	Z	
0.312	7.925 CC-56	0.81 20.574	0.244 6.198	10.00 1.750	0.450 11.430	4.700 20.906	0.360 9.14	0.034 0.86	9.50	SST C	N	
0.312	7.925 3678	0.81 20.574	0.240 6.096	13.00 2.275	0.420 10.668	5.300 23.574	0.400 10.16	0.036 0.91	11.00	SPR CG	Z	
0.312	7.925 W-35	0.81 20.574	0.240 6.096	16.00 2.800	0.350 8.890	5.700 25.354	0.320 8.13	0.036 0.91	9.00	SPR CG	N	
0.312	7.925 S-476	0.84 21.336	0.244 6.198	9.70 1.698	0.470 11.938	4.600 20.461	0.370 9.40	0.034 0.86	10.00	SST C	N	
0.312	7.925 2614	0.84 21.336	0.208 5.283	89.00 15.575	0.240 6.096	22.000 97.856	0.460 11.68	0.052 1.32	8.75	MW CG	Z	
0.312	7.925 2949	0.88 22.352	0.272 6.909	1.80 0.315	0.720 18.288	1.300 5.782	0.160 4.06	0.020 0.51	7.00	MW C	Z	
0.312	7.925 J-81	0.88 22.352	0.272 6.909	0.80 0.140	0.620 15.748	0.490 2.180	0.260 6.60	0.020 0.51	12.00	SST C	N	
0.312	7.925 M-89	0.88 22.352	0.272 6.909	1.90 0.333	0.720 18.288	1.400 6.227	0.160 4.06	0.020 0.51	6.75	MW C	Z	
0.312	7.925 Q-43	0.88 22.352	0.272 6.909	1.30 0.228	0.700 17.780	0.930 4.137	0.180 4.57	0.020 0.51	8.00	SST C	N	
0.312	7.925 10544	0.88 22.352	0.270 6.858	1.40 0.245	0.640 16.256	0.910 4.048	0.230 5.84	0.021 0.53	10.00	MW C	Z	
0.312	7.925 S-729	0.88 22.352	0.268 6.807	2.70 0.473	0.510 12.954	1.400 6.227	0.170 4.32	0.022 0.56	6.50	SST C	N	
0.312	7.925 II-17	0.88 22.										




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh								
0.312	7.925	CC-2	1.00	25.400	0.284	7.214	0.35	0.061	0.870	22.098	0.300	1.334	0.130	3.30	0.014	0.36	8.00	MW	C	N
0.312	7.925	202-A	1.00	25.400	0.280	7.112	0.97	0.170	0.820	20.828	0.800	3.558	0.110	2.79	0.016	0.41	5.75	MW	C	Z
0.312	7.925	W-93	1.00	25.400	0.278	7.061	0.67	0.117	0.830	21.082	0.550	2.446	0.170	4.32	0.017	0.43	9.00	MW	C	Z
0.312	7.925	1789	1.00	25.400	0.272	6.909	2.10	0.368	0.750	19.050	1.500	6.672	0.150	3.81	0.020	0.51	6.50	MW	C	Z
0.312	7.925	10917	1.00	25.400	0.272	6.909	1.60	0.280	0.660	16.764	1.000	4.448	0.170	4.32	0.020	0.51	7.25	SST	C	N
0.312	7.925	II-15	1.00	25.400	0.272	6.909	1.10	0.193	0.800	20.320	0.920	4.092	0.200	5.08	0.020	0.51	9.00	SST	C	N
0.312	7.925	N-123	1.00	25.400	0.272	6.909	0.62	0.109	0.680	17.272	0.420	1.868	0.320	8.13	0.020	0.51	15.00	SST	C	N
0.312	7.925	S-732	1.00	25.400	0.248	6.299	8.20	1.435	0.480	12.192	3.900	17.347	0.330	8.38	0.032	0.81	9.25	SST	C	N
0.312	7.925	K-94	1.00	25.400	0.246	6.248	7.10	1.243	0.570	14.478	4.100	18.237	0.430	10.92	0.033	0.84	13.00	SPR	CG	N
0.312	7.925	10201	1.00	25.400	0.242	6.147	14.00	2.450	0.360	9.144	5.200	23.130	0.350	8.89	0.035	0.89	9.00	SPR	C	Z
0.312	7.925	G-10	1.00	25.400	0.232	5.893	17.00	2.975	0.470	11.938	7.800	34.694	0.520	13.21	0.040	1.02	13.00	HD	CG	N
0.312	7.925	S-733	1.00	25.400	0.228	5.791	23.00	4.025	0.370	9.398	8.400	37.363	0.490	12.45	0.042	1.07	10.80	SST	C	N
0.312	7.925	3736	1.00	25.400	0.226	5.740	22.00	3.850	0.380	9.652	8.300	36.918	0.620	15.75	0.043	1.09	13.50	SPR	C	Z
0.312	7.925	3764	1.00	25.400	0.188	4.775	247.00	43.225	0.100	2.540	26.000	115.648	0.470	11.94	0.062	1.57	7.50	HD	CG	Z
0.312	7.925	S-1580	1.03	26.162	0.252	6.401	2.60	0.455	0.400	10.160	1.000	4.448	0.630	16.00	0.030	0.76	20.00	SST	C	N
0.312	7.925	S-790	1.03	26.162	0.232	5.893	15.00	2.625	0.490	12.446	7.300	32.470	0.520	13.21	0.040	1.02	13.00	SST	CG	N
0.312	7.925	Z-51	1.03	26.162	0.186	4.724	244.00	42.700	0.110	2.794	27.000	120.096	0.570	14.48	0.063	1.60	8.00	SPR	C	N
0.312	7.925	GG-12	1.06	26.924	0.284	7.214	0.35	0.061	0.940	23.876	0.330	1.468	0.130	3.30	0.014	0.36	8.00	MW	C	N
0.312	7.925	S-996	1.06	26.924	0.276	7.010	0.43	0.075	0.790	20.066	0.340	1.512	0.270	6.86	0.018	0.46	14.00	SST	C	N
0.312	7.925	AA-10	1.06	26.924	0.272	6.909	0.40	0.070	0.600	15.240	0.240	1.068	0.460	11.68	0.020	0.51	22.00	SST	C	N
0.312	7.925	A9-67	1.06	26.924	0.254	6.452	6.40	1.120	0.680	17.272	4.400	19.571	0.290	7.37	0.029	0.74	9.00	MW	C	Z
0.312	7.925	S-3296	1.06	26.924	0.252	6.401	6.90	1.208	0.700	17.780	4.800	21.350	0.320	8.13	0.030	0.76	9.50	MW	C	Z
0.312	7.925	V-62	1.06	26.924	0.246	6.248	8.00	1.400	0.540	13.716	4.300	19.126	0.350	8.89	0.033	0.84	10.50	SST	CG	N
0.312	7.925	3092	1.06	26.924	0.208	5.283	85.00	14.875	0.180	4.572	15.000	66.720	0.470	11.94	0.052	1.32	9.00	SPR	CG	Z
0.312	7.925	W-57	1.06	26.924	0.204	5.182	56.00	9.800	0.290	7.366	16.000	71.168	0.700	17.78	0.054	1.37	13.00	SST	CG	N
0.312	7.925	11162	1.13	28.702	0.274	6.960	0.96	0.168	0.920	23.368	0.880	3.914	0.200	5.08	0.019	0.48	9.75	MW	C	Z
0.312	7.925	2791	1.13	28.702	0.272	6.909	1.30	0.228	0.930	23.622	1.200	5.338	0.200	5.08	0.020	0.51	9.00	MW	C	GI
0.312	7.925	10910	1.13	28.702	0.272	6.909	0.99	0.173	0.900	22.860	0.890	3.959	0.230	5.84	0.020	0.51	10.30	SST	C	N
0.312	7.925	CC-33	1.13	28.702	0.272	6.909	1.50	0.263	0.970	24.638	1.500	6.672	0.160	4.06	0.020	0.51	8.00	MW	CG	Z
0.312	7.925	S-483	1.13	28.702	0.262	6.655	2.10	0.368	0.800	20.320	1.700	7.562	0.330	8.38	0.025	0.64	12.00	SST	C	N
0.312	7.925	A-41	1.13	28.702	0.258	6.553	4.10	0.718	0.830	21.082	3.400	15.123	0.300	7.62	0.027	0.69	10.00	MW	C	N
0.312	7.925	3514	1.13	28.702	0.256	6.502	3.40	0.595	0.720	18.288	2.400	10.675	0.410	10.41	0.028	0.71	13.50	MW	C	Z
0.312	7.925	3746	1.13	28.702	0.252	6.401	6.90	1.208	0.700	17.780	4.800	21.350	0.320	8.13	0.030	0.76	9.50	MW	C	Z
0.312	7.925	HH-97	1.13	28.702	0.246	6.248	8.00	1.400	0.540	13.716	4.300	19.126	0.380	9.65	0.033	0.84	10.50	SST	C	N
0.312	7.925	S-791	1.13	28.702	0.242	6.147	7.40	1.295	0.640	16.256	4.700	20.906	0.490	12.45	0.035	0.89	14.00	SST	CG	N
0.312	7.925	10147	1.13	28.702	0.236	5.994	13.00	2.275	0.500	12.700	6.700	29.802	0.490	12.45	0.038	0.97	13.00	SPR	CG	Z
0.312	7.925	S-788	1.13	28.702	0.204	5.182	58.00	10.150	0.280	7.112	16.000	71.168	0.700	17.78	0.054	1.37	12.00	SST	CG	N
0.312	7.925	S-36	1.13	28.702	0.186	4.724	104.00	18.200	0.235	5.969	24.000	106.752	0.863	21.92	0.063	1.59	13.80	SST	CG	N
0.312	7.925	S-1182	1.16	29.464	0.262	6.655	3.40	0.595	0.550	13.970	1.900	8.451	0.230	5.84	0.025	0.64	8.00	SST	C	N
0.312	7.925	K-43	1.19	30.226	0.238	6.045	8.80	1.540	0.610	15.494	5.400	24.019	0.570	14.48	0.037	0.94	15.50	SST	C	N
0.312	7.925	10732	1.19	30.226	0.230	5.842	29.00	5.075	0.290	7.366	8.300	36.918	0.370	9.40	0.041	1.04	9.00	SPR	CG	Z
0.312	7.925	L-95	1.19	30.226	0.168	4.267	279.00	48.825	0.130	3.302	37.000	164.576	0.860	21.84	0.072	1.83	12.00	HD	CG	Z
0.312	7.925	S-1686	1.20	30.480	0.228	5.791	25.00	4.375	0.340	8.636	8.400	37.363	0.420	10.67	0.042	1.07	10.00	SST	CG	N
0.312	7.925	2807	1.22	30.988	0.260	6.604	2.90	0.508	0.910	23.114	2.600	11.565	0.310	7.87	0.026	0.66	11.80	MW	CG	Z
0.312	7.925	10504	1.22	30.988	0.196	4.978	110.00	19.250	0.190	4.826	21.000	93.408	0.700	17.78	0.058	1.47	11.00	SPR	CG	Z
0.312	7.925	1859	1.22	30.988	0.194	4.928	134.00	23.450	0.230	5.842	31.000	137.888	0.650	16.51	0.059	1.50	10.00	MW	C	Z
0.312	7.925	N-38	1.25	31.750	0.274	6.960	0.81	0.142	1.000	25.400	0.840	3.736	0.210	5.33	0.019	0.48	10.00	SST	C	N
0.312	7.925	11368	1.25	31.750	0.272	6.909	0.91	0.159	1.000	25.400	0.920	4.092	0.240	6.10	0.020	0.51	11.00	SST	C	N
0.312	7.925	10049	1.25	31.750	0.264	6.706	2.90	0.508	0.930	23.622	2.700	12.010	0.240	6.10	0.024	0.61	9.00	MW	C	GI
0.312	7.925	S-3114	1.25	31.750	0.262	6.655	3.40	0.595	0.550	13.970	1.900	8.451	0.230	5.84	0.025	0.64	8.00	SST	C	N
0.312	7.925	G-3	1.25	31.750	0.260	6.604	2.20	0.385	0.830	21.082	1.800	8.006	0.420	10.67	0.026	0.66	15.00	MW	C	Z
0.312	7.925	AA-84	1.25	31.750	0.252	6.401	4.30	0.753	0.800	20.320	3.500	15.568	0.450	11.43	0.030	0.76	14.00	MW	C	Z
0.312	7.925	A9-46	1.25	31.750	0.250	6.350	4.60	0.805	0.780	19.812	3.600	16.013	0.420	10.67	0.031	0.79	13.50	SST	CG	Z
0.312	7.925	3715	1.25	31.750	0.246	6.248	6.00	1.050	0.750	19										




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.312	7.925	12702	1.40	35.560	0.254	6.452	2.60	0.455	0.820	20.828	2.200	9.786	0.580	14.73	0.029	0.74	19.00	MW	C	N
0.312	7.925	BB-10	1.41	35.814	0.252	6.401	3.20	0.560	0.910	23.114	2.900	12.899	0.500	12.70	0.030	0.76	16.50	SST	CG	N
0.312	7.925	QQ-69	1.44	36.576	0.268	6.807	0.81	0.142	1.000	25.400	0.850	3.781	0.390	9.91	0.022	0.56	16.80	SST	C	N
0.312	7.925	12751	1.44	36.576	0.254	6.452	2.60	0.455	0.860	21.844	2.300	10.230	0.580	14.73	0.029	0.74	19.00	MW	C	N
0.312	7.925	Q-46	1.44	36.576	0.248	6.299	4.30	0.753	0.830	21.082	3.600	16.013	0.610	15.49	0.032	0.81	18.00	SPR	C	Z
0.312	7.925	B10-44	1.44	36.576	0.238	6.045	12.00	2.100	0.500	12.700	6.200	27.578	0.460	11.68	0.037	0.94	12.50	SPR	CG	Z
0.312	7.925	2576	1.47	37.338	0.262	6.655	1.60	0.280	1.000	25.400	1.600	7.117	0.450	11.43	0.025	0.64	17.00	MW	C	Z
0.312	7.925	LL-93	1.47	37.338	0.212	5.385	29.00	5.075	0.460	11.684	13.000	57.824	0.930	23.62	0.050	1.27	17.50	SST	C	N
0.312	7.925	B3-69	1.48	37.592	0.252	6.401	3.10	0.543	0.880	22.352	2.700	12.010	0.600	15.24	0.030	0.76	19.00	MW	C	N
0.312	7.925	10736	1.50	38.100	0.270	6.858	1.00	0.175	1.200	30.480	1.200	5.338	0.290	7.37	0.021	0.53	13.00	MW	C	GI
0.312	7.925	3	1.50	38.100	0.266	6.756	1.80	0.315	1.200	30.480	2.200	9.786	0.280	7.11	0.023	0.58	11.30	MW	C	Z
0.312	7.925	2759	1.50	38.100	0.266	6.756	1.10	0.193	1.100	27.940	1.200	5.338	0.420	10.67	0.023	0.58	17.30	MW	C	Z
0.312	7.925	S-44	1.50	38.100	0.252	6.401	4.10	0.718	0.790	20.066	3.200	14.234	0.420	10.67	0.030	0.76	13.00	SST	C	N
0.312	7.925	6	1.50	38.100	0.244	6.198	6.70	1.173	0.750	19.050	5.000	22.240	0.550	13.97	0.034	0.86	15.30	HD	C	Z
0.312	7.925	K-23	1.50	38.100	0.242	6.147	6.50	1.138	0.750	19.050	4.900	21.795	0.580	14.73	0.035	0.89	15.50	SST	C	N
0.312	7.925	3908	1.50	38.100	0.228	5.791	17.00	2.975	0.510	12.954	8.900	39.587	0.670	17.02	0.042	1.07	15.00	SPR	C	Z
0.312	7.925	S-735	1.50	38.100	0.228	5.791	14.00	2.450	0.580	14.732	8.400	37.363	0.700	17.78	0.042	1.07	15.80	SST	C	N
0.312	7.925	N-70	1.50	38.100	0.222	5.639	27.00	4.725	0.410	10.414	11.000	48.928	0.610	15.49	0.045	1.14	13.50	SPR	CG	GI
0.312	7.925	B14-31	1.50	38.100	0.220	5.588	26.00	4.550	0.440	11.176	12.000	53.376	0.740	18.80	0.046	1.17	15.00	SPR	C	Z
0.312	7.925	936	1.50	38.100	0.218	5.537	29.00	5.075	0.430	10.922	12.000	53.376	0.750	19.05	0.047	1.19	15.00	HD	C	Z
0.312	7.925	11237	1.50	38.100	0.208	5.283	37.00	6.475	0.410	10.414	15.000	66.720	0.990	25.15	0.052	1.32	18.00	SPR	C	Z
0.312	7.925	11383	1.50	38.100	0.198	5.029	87.00	15.225	0.230	5.842	20.000	88.960	0.710	18.03	0.057	1.45	12.50	HD	CG	Z
0.312	7.925	2823	1.53	38.862	0.240	6.096	8.50	1.488	0.930	23.622	7.900	35.139	0.560	14.22	0.036	0.91	15.50	MW	CG	Z
0.312	7.925	S-180	1.59	40.386	0.264	6.706	1.40	0.245	1.200	30.480	1.700	7.562	0.360	9.14	0.024	0.61	15.00	SST	CG	N
0.312	7.925	PP-65	1.63	41.402	0.272	6.909	0.92	0.161	1.400	35.560	1.300	5.782	0.240	6.10	0.020	0.51	12.00	MW	CG	Z
0.312	7.925	J-100	1.63	41.402	0.242	6.147	6.30	1.103	0.780	19.812	4.900	21.795	0.560	14.22	0.035	0.89	16.00	SST	CG	N
0.312	7.925	WW-59	1.63	41.402	0.242	6.147	6.30	1.103	0.830	21.082	5.200	23.130	0.630	16.00	0.035	0.89	18.00	SPR	CG	N
0.312	7.925	116	1.63	41.402	0.230	5.842	13.00	2.275	0.650	16.510	8.300	36.918	0.780	19.81	0.041	1.04	18.00	HD	C	Z
0.312	7.925	10127	1.63	41.402	0.228	5.791	17.00	2.975	0.510	12.954	8.900	39.587	0.670	17.02	0.042	1.07	15.00	SPR	C	Z
0.312	7.925	10916	1.63	41.402	0.208	5.283	37.00	6.475	0.420	10.668	15.000	66.720	1.000	25.40	0.052	1.32	18.30	SPR	C	N
0.312	7.925	10535	1.63	41.402	0.202	5.131	48.00	8.400	0.380	9.652	18.000	80.064	1.050	26.67	0.055	1.40	18.00	SPR	C	Z
0.312	7.925	A15-38	1.66	42.164	0.256	6.502	1.60	0.280	1.000	25.400	1.700	7.562	0.640	16.26	0.028	0.71	22.80	SST	CG	N
0.312	7.925	12432	1.72	43.688	0.250	6.350	5.30	0.928	1.000	25.400	5.300	23.574	0.440	11.18	0.031	0.79	13.30	MW	C	Z
0.312	7.925	202-C	1.75	44.450	0.280	7.112	0.39	0.068	1.600	40.640	0.610	2.713	0.200	5.08	0.016	0.41	11.30	MW	C	Z
0.312	7.925	FF-42	1.75	44.450	0.272	6.909	0.97	0.170	1.500	38.100	1.500	6.672	0.250	6.35	0.020	0.51	11.50	MW	C	Z
0.312	7.925	4196	1.75	44.450	0.260	6.604	2.80	0.490	1.100	27.940	3.200	14.234	0.340	8.64	0.026	0.66	12.00	MW	C	Z
0.312	7.925	JJ-100	1.75	44.450	0.232	5.893	7.60	1.330	0.790	20.066	6.000	26.688	0.960	24.38	0.040	1.02	23.00	SST	C	N
0.312	7.925	10100	1.75	44.450	0.222	5.639	23.00	4.025	0.480	12.192	11.000	48.928	0.740	18.80	0.045	1.14	15.50	SPR	C	Z
0.312	7.925	1937	1.75	44.450	0.196	4.978	78.00	13.650	0.270	6.858	21.000	93.408	0.910	23.11	0.058	1.47	14.80	SPR	C	Z
0.312	7.925	B15-25	1.75	44.450	0.180	4.572	126.00	22.050	0.240	6.096	30.000	133.440	1.160	29.46	0.066	1.68	16.50	SPR	C	N
0.312	7.925	3183	1.78	45.212	0.248	6.299	6.10	1.068	0.970	24.638	5.900	26.243	0.460	11.68	0.032	0.81	13.30	MW	C	Z
0.312	7.925	00-87	1.88	47.752	0.242	6.147	5.10	0.893	1.000	25.400	5.200	23.130	0.810	20.57	0.035	0.89	22.00	SPR	C	Z
0.312	7.925	10481	1.88	47.752	0.230	5.842	11.00	1.925	0.740	18.796	8.300	36.918	0.860	21.84	0.041	1.04	20.00	SPR	C	Z
0.312	7.925	U-54	1.94	49.276	0.260	6.604	2.00	0.350	1.500	38.100	3.100	13.789	0.420	10.67	0.026	0.66	16.00	MW	C	N
0.312	7.925	1942	1.94	49.276	0.232	5.893	10.00	1.750	0.750	19.050	7.800	34.694	0.830	21.08	0.040	1.02	19.80	SPR	C	Z
0.312	7.925	J-87	1.94	49.276	0.232	5.893	9.90	1.733	0.730	18.542	7.300	32.470	0.720	18.29	0.040	1.02	18.00	SST	CG	N
0.312	7.925	S-910	2.00	50.800	0.264	6.706	1.40	0.245	1.200	30.480	1.800	8.006	0.340	8.64	0.024	0.61	14.00	SST	CG	N
0.312	7.925	9	2.00	50.800	0.218	5.537	18.00	3.150	0.700	17.780	12.000	53.376	1.140	28.96	0.047	1.19	23.30	HD	C	Z
0.312	7.925	S-297	2.00	50.800	0.218	5.537	20.00	3.500	0.580	14.732	12.000	53.376	0.900	22.86	0.047	1.19	18.30	SST	C	N
0.312	7.925	3128	2.00	50.800	0.214	5.436	28.00	4.900	0.490	12.446	14.000	62.272	0.930	23.62	0.049	1.24	18.00	SPR	C	Z
0.312	7.925	937	2.00	50.800	0.204	5.182	44.00	7.700	0.390	9.906	17.000	75.616	1.030	26.16	0.054	1.37	18.00	HD	C	Z
0.312	7.925	4122	2.13	54.102	0.232	5.893	10.00	1.750	0.760	19.304	7.800	34.694	0.840	21.34	0.040	1.02	20.00	SPR	C	Z
0.312	7.925	S-821	2.16	54.864	0.240	6.096	4.10	0.718	1.200	30.480	4.800	21.350	0.990	25.15	0.036	0.91	26.50	SST	C	N
0.312	7.925	S-1030	2.25	57.150</td																




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh								
0.312	7.925	12408	10.50	266.700	0.216	5.486	5.30	0.928	2.500	63.500	13.000	57.824	3.890	98.81	0.048	1.22	80.00	SPR	C	N
0.328	8.331	A-9-4	0.22	5.588	0.232	5.893	206.00	36.050	0.054	1.372	11.000	48.928	0.148	3.76	0.048	1.21	3.00	SST	CG	N
0.328	8.331	10844	0.25	6.350	0.238	6.045	260.00	45.500	0.040	1.016	10.000	44.480	0.180	4.57	0.045	1.14	3.00	SST	C	Z
0.328	8.331	3761	0.25	6.350	0.228	5.791	558.00	97.650	0.020	0.508	13.000	57.824	0.190	4.83	0.050	1.27	2.75	SPR	C	Z
0.328	8.331	B2-16	0.28	7.112	0.264	6.706	39.00	6.825	0.100	2.540	4.000	17.792	0.140	3.56	0.032	0.81	3.50	SPR	C	Z
0.328	8.331	Y-91	0.28	7.112	0.264	6.706	19.00	3.325	0.120	3.048	2.300	10.230	0.160	4.06	0.032	0.81	5.00	SPR	CG	N
0.328	8.331	B2-5	0.30	7.620	0.264	6.706	39.00	6.825	0.100	2.540	4.000	17.792	0.140	3.56	0.032	0.81	3.50	SPR	C	Z
0.328	8.331	G-39	0.31	7.874	0.280	7.112	14.00	2.450	0.190	4.826	2.500	11.120	0.100	2.54	0.024	0.61	3.25	MW	C	N
0.328	8.331	NN-50	0.31	7.874	0.204	5.182	491.00	85.925	0.048	1.219	23.000	102.304	0.255	6.48	0.063	1.59	4.00	SST	CG	N
0.328	8.331	H-58	0.34	8.636	0.296	7.518	0.92	0.161	0.250	6.350	0.230	1.023	0.100	2.54	0.016	0.41	5.00	SST	C	N
0.328	8.331	EE-32	0.38	9.652	0.270	6.858	8.30	1.453	0.200	5.080	1.700	7.562	0.170	4.32	0.029	0.74	6.00	SST	CG	N
0.328	8.331	XX-44	0.38	9.652	0.264	6.706	29.00	5.075	0.140	3.556	4.000	17.792	0.160	4.06	0.032	0.81	4.00	HD	CG	Z
0.328	8.331	MM-69	0.38	9.652	0.208	5.283	429.00	75.075	0.050	1.270	21.000	93.408	0.300	7.62	0.060	1.52	4.00	SST	C	N
0.328	8.331	S-4	0.41	10.414	0.280	7.112	4.90	0.858	0.260	6.604	1.300	5.782	0.140	3.56	0.024	0.61	5.00	SST	C	N
0.328	8.331	I-38	0.44	11.176	0.276	7.010	12.00	2.100	0.250	6.350	3.000	13.344	0.100	2.54	0.026	0.66	4.00	MW	CG	GI
0.328	8.331	II-31	0.44	11.176	0.268	6.807	22.00	3.850	0.210	5.334	4.600	20.461	0.120	3.05	0.030	0.76	4.00	MW	CG	Z
0.328	8.331	KK-1	0.44	11.176	0.268	6.807	5.50	0.963	0.140	3.556	0.760	3.380	0.300	7.62	0.030	0.76	10.00	MW	CG	Z
0.328	8.331	GG-24	0.44	11.176	0.258	6.553	25.00	4.375	0.180	4.572	4.700	20.906	0.180	4.57	0.035	0.89	5.00	SST	CG	N
0.328	8.331	2944	0.44	11.176	0.256	6.502	52.00	9.100	0.110	2.794	5.400	24.019	0.180	4.57	0.036	0.91	4.00	SPR	C	Z
0.328	8.331	A10-27	0.44	11.176	0.256	6.502	34.00	5.950	0.150	3.810	5.100	22.685	0.160	4.06	0.036	0.91	4.50	SST	CG	N
0.328	8.331	S-817	0.44	11.176	0.252	6.401	27.00	4.725	0.210	5.334	5.600	24.909	0.230	5.84	0.038	0.97	6.00	SST	CG	N
0.328	8.331	V-43	0.44	11.176	0.246	6.248	40.00	7.000	0.190	4.826	7.500	33.360	0.240	6.10	0.041	1.04	5.75	SST	CG	N
0.328	8.331	3669	0.44	11.176	0.244	6.198	64.00	11.200	0.130	3.302	8.500	37.808	0.210	5.33	0.042	1.07	5.00	SPR	CG	Z
0.328	8.331	Y-71	0.44	11.176	0.238	6.045	116.00	20.300	0.090	2.286	10.000	44.480	0.190	4.83	0.045	1.14	4.25	SPR	CG	N
0.328	8.331	O-117	0.50	12.700	0.264	6.706	12.00	2.100	0.240	6.096	2.800	12.454	0.260	6.60	0.032	0.81	7.00	SPR	C	GI
0.328	8.331	2578	0.50	12.700	0.262	6.655	17.00	2.975	0.270	6.858	4.400	19.571	0.230	5.84	0.033	0.84	6.00	HD	C	Z
0.328	8.331	W-86	0.50	12.700	0.238	6.045	57.00	9.975	0.170	4.318	9.800	43.590	0.270	6.86	0.045	1.14	6.00	SST	CG	N
0.328	8.331	A10-51	0.50	12.700	0.236	5.994	31.00	5.425	0.180	4.572	5.600	24.909	0.320	8.13	0.046	1.17	7.00	SPR	CG	N
0.328	8.331	B4-11	0.50	12.700	0.236	5.994	72.00	12.600	0.160	4.064	11.000	48.928	0.280	7.11	0.046	1.17	6.00	SPR	CG	Z
0.328	8.331	3717	0.50	12.700	0.192	4.877	437.00	76.475	0.070	1.778	32.000	142.336	0.410	10.41	0.068	1.73	6.00	SPR	CG	Z
0.328	8.331	J-76	0.50	12.700	0.184	4.674	768.00	134.400	0.050	1.270	35.000	155.680	0.360	9.14	0.072	1.83	5.00	SPR	CG	N
0.328	8.331	2673	0.56	14.224	0.264	6.706	27.00	4.725	0.210	5.334	5.600	24.909	0.130	3.30	0.032	0.81	4.00	MW	CG	GI
0.328	8.331	11132	0.56	14.224	0.238	6.045	61.00	10.675	0.170	4.318	10.000	44.480	0.330	8.38	0.045	1.14	6.25	SPR	C	Z
0.328	8.331	I-11	0.56	14.224	0.226	5.740	101.00	17.675	0.130	3.302	13.000	57.824	0.310	7.87	0.051	1.30	6.00	SST	CG	N
0.328	8.331	O-1	0.59	14.986	0.302	7.671	0.19	0.033	0.460	11.684	0.090	0.400	0.130	3.30	0.013	0.33	9.00	MW	C	GI
0.328	8.331	2671	0.59	14.986	0.288	7.315	3.90	0.683	0.370	9.398	1.500	6.672	0.100	2.54	0.020	0.51	4.00	MW	C	Z
0.328	8.331	CC-97	0.59	14.986	0.242	6.147	42.00	7.350	0.220	5.588	9.100	40.477	0.300	7.62	0.043	1.09	7.00	SPR	CG	Z
0.328	8.331	A-17	0.63	16.002	0.300	7.620	0.25	0.044	0.490	12.446	0.120	0.534	0.140	3.56	0.014	0.36	9.00	MW	C	Z
0.328	8.331	BB-97	0.63	16.002	0.278	7.061	4.00	0.700	0.430	10.922	1.700	7.562	0.200	5.08	0.025	0.64	7.00	MW	C	Z
0.328	8.331	L-36	0.63	16.002	0.278	7.061	4.50	0.788	0.460	11.684	2.100	9.341	0.160	4.06	0.025	0.64	6.50	MW	CG	N
0.328	8.331	S-1429	0.63	16.002	0.270	6.858	8.30	1.453	0.340	8.636	2.800	12.454	0.200	5.08	0.029	0.74	6.00	SST	C	N
0.328	8.331	W-65	0.63	16.002	0.264	6.706	15.00	2.625	0.280	7.112	4.000	17.792	0.220	5.59	0.032	0.81	6.00	SPR	C	Z
0.328	8.331	FF-47	0.63	16.002	0.258	6.553	19.00	3.325	0.250	6.350	4.700	20.906	0.210	5.33	0.035	0.89	6.00	SST	CG	N
0.328	8.331	S-797	0.63	16.002	0.258	6.553	15.00	2.625	0.310	7.874	4.700	20.906	0.250	6.35	0.035	0.89	7.00	SST	CG	N
0.328	8.331	A13-45	0.63	16.002	0.242	6.147	35.00	6.125	0.260	6.604	9.100	40.477	0.340	8.64	0.043	1.09	8.00	SPR	CG	N
0.328	8.331	LL-94	0.63	16.002	0.204	5.182	245.00	42.875	0.096	2.438	23.000	102.304	0.385	9.78	0.063	1.59	6.20	SST	CG	N
0.328	8.331	B3-44	0.66	16.764	0.282	7.163	2.40	0.420	0.450	11.430	1.100	4.893	0.210	5.33	0.023	0.58	8.00	MW	C	Z
0.328	8.331	O-142	0.66	16.764	0.246	6.248	30.00	5.250	0.240	6.096	7.500	33.360	0.290	7.37	0.041	1.04	7.00	SST	CG	N
0.328	8.331	Z-92	0.66	16.764	0.244	6.198	55.00	9.625	0.160	4.064	8.500	37.808	0.270	6.86	0.042	1.07	5.50	SPR	C	Z
0.328	8.331	B15-56	0.69	17.526	0.302	7.671	0.19	0.033	0.570	14.478	0.110	0.489	0.120	3.05	0.013	0.33	8.00	SST	C	N
0.328	8.331	S-893	0.69	17.526	0.274	6.909	6.90	1.208	0.500	12.700	3.400	10.230	0.180	4.57	0.027	0.69	5.75	SST	C	N
0.328	8.331	CC-77	0.69	17.526	0.272	6.909	6.90	1.208	0.500	12.700	3.400	15.123	0.190	4.83	0.028	0.71	6.75	MW	CG	N
0.328	8.331	A12-32	0.69	17.526	0.262	6.655	14.00	2.450	0.280	7.112	4.100	18.237	0.230	5.84	0.033	0.84	6.00	SST	C	N
0.328	8.331	S-3143	0.69	17.526	0.246	6.248	40.00	7.000	0.190	4.826	7.500	33.360	0							




Century Spring

Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.328	8.331	S-917	0.91	23.114	0.270	6.858	4.30	0.753	0.590	14.986	2.500	11.120	0.320	8.13	0.029	0.74	10.00	SST	C	N
0.328	8.331	3207	0.91	23.114	0.234	5.944	45.00	7.875	0.260	6.604	12.000	53.376	0.470	11.94	0.047	1.19	9.00	HD	C	Z
0.328	8.331	1821	0.91	23.114	0.218	5.537	92.00	16.100	0.260	6.604	24.000	106.752	0.550	13.97	0.055	1.40	9.00	MW	C	Z
0.328	8.331	4182	0.94	23.876	0.220	5.588	66.00	11.550	0.250	6.350	17.000	75.616	0.650	16.51	0.054	1.37	11.00	SPR	C	Z
0.328	8.331	H-73	0.97	24.638	0.282	7.163	1.10	0.193	0.630	16.002	0.680	3.025	0.330	8.38	0.023	0.58	13.50	SST	C	N
0.328	8.331	GG-91	0.97	24.638	0.276	7.010	3.50	0.613	0.580	14.732	2.000	8.896	0.230	5.84	0.026	0.66	8.00	SST	C	N
0.328	8.331	HH-38	1.00	25.400	0.282	7.163	1.40	0.245	0.700	17.780	0.990	4.404	0.300	7.62	0.023	0.58	12.00	MW	C	N
0.328	8.331	I-9	1.00	25.400	0.274	6.960	3.30	0.578	0.690	17.526	2.300	10.230	0.310	7.87	0.027	0.69	10.50	MW	C	Z
0.328	8.331	WW-53	1.00	25.400	0.254	6.452	14.00	2.450	0.410	10.414	5.500	24.464	0.330	8.38	0.037	0.94	9.00	SST	CG	N
0.328	8.331	CC-69	1.00	25.400	0.248	6.299	19.00	3.325	0.380	9.652	7.400	32.915	0.400	10.16	0.040	1.02	10.00	SPR	CG	Z
0.328	8.331	2581	1.00	25.400	0.242	6.147	33.00	5.775	0.390	9.906	13.000	57.824	0.410	10.41	0.043	1.09	8.50	MW	C	Z
0.328	8.331	10040	1.00	25.400	0.238	6.045	37.00	6.475	0.280	7.112	10.000	44.480	0.450	11.43	0.045	1.14	9.00	SPR	C	Z
0.328	8.331	10536	1.00	25.400	0.238	6.045	27.00	4.725	0.380	9.652	10.000	44.480	0.560	14.22	0.045	1.14	11.50	SPR	C	Z
0.328	8.331	B4-25	1.00	25.400	0.238	6.045	33.00	5.775	0.440	11.176	14.000	62.272	0.450	11.43	0.045	1.14	10.00	MW	CG	N
0.328	8.331	J-16	1.00	25.400	0.224	5.690	71.00	12.425	0.210	5.334	15.000	66.720	0.470	11.94	0.052	1.32	9.00	SPR	CG	Z
0.328	8.331	Y-96	1.06	26.924	0.232	5.893	40.00	7.000	0.320	8.128	13.000	57.824	0.520	13.21	0.048	1.22	10.80	SPR	CG	GI
0.328	8.331	B14-28	1.09	27.686	0.290	7.366	0.63	0.110	0.870	22.098	0.550	2.446	0.230	5.84	0.019	0.48	12.00	MW	CG	N
0.328	8.331	10255	1.09	27.686	0.278	7.061	2.20	0.385	0.790	20.066	1.800	8.006	0.300	7.62	0.025	0.64	11.00	MW	C	N
0.328	8.331	W-27	1.09	27.686	0.220	5.588	59.00	10.325	0.270	6.858	16.000	71.168	0.590	14.99	0.054	1.37	11.00	SST	CG	N
0.328	8.331	CC-51	1.13	28.702	0.268	6.807	6.80	1.190	0.680	17.272	4.600	20.461	0.290	7.37	0.030	0.76	8.50	MW	C	Z
0.328	8.331	HH-27	1.13	28.702	0.268	6.807	4.60	0.805	0.670	17.018	3.100	13.789	0.320	8.13	0.030	0.76	10.50	SST	CG	N
0.328	8.331	S-229	1.13	28.702	0.242	6.147	28.00	4.900	0.300	7.620	8.600	38.253	0.370	9.40	0.043	1.09	8.50	SST	C	N
0.328	8.331	Q-40	1.13	28.702	0.238	6.045	18.00	3.150	0.470	11.938	8.500	37.808	0.650	16.51	0.045	1.14	14.50	SST	CG	N
0.328	8.331	00-72	1.13	28.702	0.228	5.791	119.00	20.825	0.110	2.794	13.000	57.824	0.280	7.11	0.050	1.27	5.50	SPR	CG	Z
0.328	8.331	S-413	1.13	28.702	0.228	5.791	39.00	6.825	0.320	8.128	12.000	53.376	0.580	14.73	0.050	1.27	11.50	SST	CG	N
0.328	8.331	NN-36	1.19	30.226	0.268	6.807	6.00	1.050	0.520	13.208	3.100	13.789	0.290	7.37	0.030	0.76	8.50	SST	C	N
0.328	8.331	11101	1.19	30.226	0.234	5.944	40.00	7.000	0.300	7.620	12.000	53.376	0.470	11.94	0.047	1.19	10.00	SPR	CG	Z
0.328	8.331	3958	1.19	30.226	0.226	5.740	46.00	8.050	0.310	7.874	14.000	62.272	0.610	15.49	0.051	1.30	12.00	SPR	CG	Z
0.328	8.331	1507	1.19	30.226	0.204	5.182	150.00	26.250	0.230	5.842	34.000	151.232	0.590	14.99	0.062	1.57	9.50	MW	CG	Z
0.328	8.331	PP-34	1.25	31.750	0.288	7.315	0.70	0.123	0.990	25.146	0.690	3.069	0.260	6.60	0.020	0.51	12.00	SST	C	N
0.328	8.331	3565	1.25	31.750	0.272	6.909	4.10	0.718	0.920	23.368	3.800	16.902	0.310	7.87	0.028	0.71	10.00	MW	C	Z
0.328	8.331	MM-74	1.25	31.750	0.264	6.706	5.30	0.928	0.700	17.780	3.700	16.458	0.400	10.16	0.032	0.81	11.50	SST	C	N
0.328	8.331	NN-27	1.25	31.750	0.248	6.299	11.00	1.925	0.610	15.494	6.900	30.691	0.600	15.24	0.040	1.02	14.00	SST	C	N
0.328	8.331	EE-90	1.25	31.750	0.188	4.775	251.00	43.925	0.130	3.302	33.000	146.784	0.700	17.78	0.070	1.78	10.00	SPR	CG	N
0.328	8.331	10876	1.28	32.512	0.288	7.315	0.87	0.152	1.100	27.940	0.930	4.137	0.220	5.59	0.020	0.51	10.00	SST	C	N
0.328	8.331	10576	1.28	32.512	0.258	6.553	7.60	1.330	0.620	15.748	4.700	20.906	0.420	10.67	0.035	0.89	12.00	SST	CG	N
0.328	8.331	10720	1.28	32.512	0.246	6.248	16.00	2.800	0.510	12.954	8.000	35.584	0.570	14.48	0.041	1.04	13.00	SPR	C	Z
0.328	8.331	00-97	1.28	32.512	0.208	5.283	143.00	25.025	0.150	3.810	21.000	93.408	0.540	13.72	0.060	1.52	8.00	SST	C	Z
0.328	8.331	2783	1.31	33.274	0.266	6.756	7.90	1.383	0.640	16.256	5.100	22.685	0.290	7.37	0.031	0.79	8.25	MW	C	Z
0.328	8.331	S-186	1.31	33.274	0.204	5.182	109.00	19.075	0.215	5.461	23.000	102.304	0.709	18.01	0.063	1.59	11.40	SST	CG	N
0.328	8.331	3644	1.38	35.052	0.296	7.518	0.41	0.072	1.200	30.480	0.500	2.224	0.170	4.32	0.016	0.41	9.50	MW	C	N
0.328	8.331	11452	1.38	35.052	0.234	5.944	35.00	6.125	0.340	8.636	12.000	53.376	0.560	14.22	0.047	1.19	11.00	HD	C	Z
0.328	8.331	1905	1.38	35.052	0.146	3.708	823.00	144.025	0.080	2.032	64.000	284.672	1.000	25.40	0.091	2.31	11.00	SPR	CG	Z
0.328	8.331	10534	1.41	35.814	0.266	6.756	3.70	0.648	0.890	22.606	3.300	14.678	0.520	13.21	0.031	0.79	15.80	MW	C	Z
0.328	8.331	12468	1.47	37.338	0.284	7.214	0.98	0.172	1.200	30.480	1.100	4.893	0.310	7.87	0.022	0.56	14.00	MW	CG	Z
0.328	8.331	MM-72	1.50	38.100	0.288	7.315	0.87	0.152	1.100	27.940	0.980	4.359	0.220	5.59	0.020	0.51	10.00	SST	C	N
0.328	8.331	S-1159	1.50	38.100	0.278	7.061	1.80	0.315	0.980	24.892	1.800	8.006	0.310	7.87	0.025	0.64	11.50	SST	C	N
0.328	8.331	12251	1.50	38.100	0.268	6.807	2.70	0.473	1.000	25.400	2.700	12.010	0.500	12.70	0.030	0.76	16.50	SST	CG	N
0.328	8.331	VV-70	1.50	38.100	0.266	6.756	3.00	0.525	0.880	22.352	2.600	11.565	0.620	15.75	0.031	0.79	19.00	MW	C	Z
0.328	8.331	K-30	1.50	38.100	0.252	6.401	8.50	1.488	0.700	17.780	6.000	26.688	0.590	14.99	0.038	0.97	14.50	SST	C	N
0.328	8.331	Q-47	1.59	40.386	0.260	6.604	5.00	0.875	0.960	24.384	4.800	21.350	0.580	14.73	0.034	0.86	17.00	SPR	CG	N
0.328	8.331	A11-57	1.59	40.386	0.256	6.502	14.00	2.450	0.390	9.906	5.400	24.019	0.360	9.14	0.036	0.91	9.00	SPR	C	Z
0.328	8.331	L-54	1.69	42.926	0.234	5.944	21.00	3.675	0.560	14.224	12.000	53.376	0.800	20.32	0.047	1.19	17.00	SPR	CG	Z
0.328	8.331	RR-69	1.69	42.926																




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends C F N sh									
0.343	8.712	S-855	0.19	4.826	0.285	7.239	46.00	8.050	0.060	1.524	2.700	12.010	0.080	2.03	0.029	0.74	2.50	SST	C	N
0.343	8.712	S-1324	0.25	6.350	0.273	6.934	32.00	5.600	0.080	2.032	2.400	10.675	0.180	4.57	0.035	0.89	4.00	SST	C	N
0.343	8.712	U-95	0.28	7.112	0.283	7.188	19.00	3.325	0.160	4.064	3.100	13.789	0.120	3.05	0.030	0.76	4.00	MW	CG	N
0.343	8.712	PP-51	0.28	7.112	0.243	6.172	211.00	36.925	0.060	1.524	12.000	53.376	0.180	4.57	0.050	1.27	3.50	SST	CG	N
0.343	8.712	DD-77	0.31	7.874	0.315	8.001	0.31	0.054	0.200	5.080	0.060	0.267	0.110	2.79	0.014	0.36	7.00	MW	C	N
0.343	8.712	GG-54	0.31	7.874	0.295	7.493	9.80	1.715	0.200	5.080	2.000	8.896	0.110	2.79	0.024	0.61	3.50	MW	C	N
0.343	8.712	U-74	0.31	7.874	0.283	7.188	8.30	1.453	0.100	2.540	0.840	3.736	0.210	5.33	0.030	0.76	6.00	SST	C	N
0.343	8.712	2731	0.31	7.874	0.275	6.985	65.00	11.375	0.070	1.778	4.600	20.461	0.140	3.56	0.034	0.86	3.00	SPR	C	Z
0.343	8.712	B-7-25	0.34	8.636	0.303	7.696	3.90	0.683	0.270	6.858	1.000	4.448	0.080	2.03	0.020	0.51	3.75	MW	CG	N
0.343	8.712	G-52	0.34	8.636	0.261	6.629	49.00	8.575	0.140	3.556	6.800	30.246	0.210	5.33	0.041	1.04	5.00	SPR	CG	Z
0.343	8.712	B-71	0.38	9.652	0.315	8.001	0.52	0.091	0.290	7.366	0.150	0.667	0.080	2.03	0.014	0.36	5.00	MW	C	Z
0.343	8.712	O-53	0.38	9.652	0.293	7.442	7.60	1.330	0.230	5.842	1.700	7.562	0.130	3.30	0.025	0.64	4.00	SST	C	N
0.343	8.712	NN-40	0.38	9.652	0.283	7.188	19.00	3.325	0.230	5.842	4.300	19.126	0.150	3.81	0.030	0.76	4.00	MW	C	Z
0.343	8.712	B14-33	0.38	9.652	0.277	7.036	13.00	2.275	0.170	4.318	2.300	10.230	0.210	5.33	0.033	0.84	6.25	SPR	CG	N
0.343	8.712	MM-76	0.38	9.652	0.233	5.918	192.00	33.600	0.070	1.778	14.000	62.272	0.300	7.62	0.055	1.40	4.50	SST	C	N
0.343	8.712	V-55	0.38	9.652	0.231	5.867	212.00	37.100	0.080	2.032	17.000	75.616	0.250	6.35	0.056	1.42	4.50	SST	CG	N
0.343	8.712	I-28	0.41	10.414	0.245	6.223	130.00	22.750	0.100	2.540	13.000	57.824	0.220	5.59	0.049	1.24	4.50	SPR	CG	N
0.343	8.712	1925	0.44	11.176	0.281	7.137	22.00	3.850	0.220	5.588	4.900	21.795	0.160	4.06	0.031	0.79	4.00	MW	C	Z
0.343	8.712	2950	0.44	11.176	0.275	6.985	33.00	5.775	0.140	3.556	4.600	20.461	0.170	4.32	0.034	0.86	4.00	SPR	C	Z
0.343	8.712	A12-3	0.45	11.430	0.263	6.680	48.00	8.400	0.150	3.810	7.100	31.581	0.230	5.84	0.040	1.02	4.75	SPR	C	N
0.343	8.712	W-97	0.47	11.938	0.275	6.985	19.00	3.325	0.220	5.588	4.300	19.126	0.200	5.08	0.034	0.86	5.00	SST	C	N
0.343	8.712	11451	0.50	12.700	0.305	7.747	2.40	0.420	0.400	10.160	0.980	4.359	0.100	2.54	0.019	0.48	4.25	MW	C	N
0.343	8.712	N-39	0.50	12.700	0.301	7.645	1.70	0.298	0.360	9.144	0.600	2.669	0.140	3.56	0.021	0.53	6.50	SST	CG	N
0.343	8.712	BB-56	0.50	12.700	0.295	7.493	4.30	0.753	0.360	9.144	1.500	6.672	0.140	3.56	0.024	0.61	5.00	SST	C	Z
0.343	8.712	2568	0.50	12.700	0.287	7.290	14.00	2.450	0.260	6.604	3.600	16.013	0.140	3.56	0.028	0.71	4.00	MW	C	Z
0.343	8.712	II-43	0.50	12.700	0.283	7.188	3.30	0.578	0.070	1.778	0.210	0.934	0.440	11.18	0.030	0.76	13.50	MW	C	N
0.343	8.712	S-114	0.50	12.700	0.279	7.087	13.00	2.275	0.270	6.858	3.600	16.013	0.200	5.08	0.032	0.81	5.25	SST	C	N
0.343	8.712	I-86	0.50	12.700	0.275	6.985	19.00	3.325	0.230	5.842	4.300	19.126	0.200	5.08	0.034	0.86	5.00	SST	C	N
0.343	8.712	3453	0.50	12.700	0.273	6.934	25.00	4.375	0.200	5.080	4.800	21.350	0.210	5.33	0.035	0.89	5.00	SPR	C	GI
0.343	8.712	MM-64	0.50	12.700	0.263	6.680	23.00	4.025	0.220	5.588	5.100	22.685	0.280	7.11	0.040	1.02	7.00	SST	CG	N
0.343	8.712	10882	0.50	12.700	0.251	6.375	89.00	15.575	0.170	4.318	15.000	66.720	0.220	5.59	0.046	1.17	4.75	MW	CG	N
0.343	8.712	DD-30	0.50	12.700	0.243	6.172	79.00	13.825	0.150	3.810	12.000	53.376	0.300	7.62	0.050	1.27	6.00	SST	CG	N
0.343	8.712	G-93	0.50	12.700	0.235	5.969	110.00	19.250	0.140	3.556	15.000	66.720	0.320	8.13	0.054	1.37	6.00	SST	CG	N
0.343	8.712	BB-39	0.50	12.700	0.183	4.648	1177.00	205.975	0.040	1.016	46.000	204.608	0.380	9.65	0.080	2.03	4.75	SPR	CG	N
0.343	8.712	L-89	0.53	13.462	0.299	7.595	2.90	0.508	0.390	9.906	1.100	4.893	0.140	3.56	0.022	0.56	5.50	MW	C	Z
0.343	8.712	A10-69	0.53	13.462	0.285	7.239	5.30	0.928	0.310	7.874	1.700	7.562	0.220	5.59	0.029	0.74	7.50	SST	CG	N
0.343	8.712	3509	0.53	13.462	0.283	7.188	11.00	1.925	0.370	9.398	4.000	17.792	0.170	4.32	0.030	0.76	5.50	MW	CG	Z
0.343	8.712	Q-97	0.53	13.462	0.283	7.188	6.70	1.173	0.290	7.366	2.000	8.896	0.240	6.10	0.030	0.76	7.00	SST	C	N
0.343	8.712	B-67	0.53	13.462	0.279	7.087	10.00	1.750	0.280	7.112	2.800	12.454	0.260	6.60	0.032	0.81	7.00	HD	C	N
0.343	8.712	II-32	0.53	13.462	0.279	7.087	9.40	1.645	0.320	8.128	2.900	12.899	0.220	5.59	0.032	0.81	6.75	SST	CG	N
0.343	8.712	JJ-61	0.53	13.462	0.259	6.579	36.00	6.300	0.220	5.588	7.700	34.250	0.250	6.35	0.042	1.07	6.00	SST	CG	N
0.343	8.712	1655	0.53	13.462	0.189	4.801	716.00	125.300	0.060	1.524	41.000	182.368	0.440	11.18	0.077	1.96	5.75	SPR	CG	Z
0.343	8.712	10730	0.56	14.224	0.309	7.849	1.40	0.245	0.470	11.938	0.650	2.891	0.090	2.29	0.017	0.43	4.50	MW	C	N
0.343	8.712	S-1040	0.56	14.224	0.309	7.849	1.00	0.175	0.460	11.684	0.460	2.046	0.100	2.54	0.017	0.43	5.00	SST	C	N
0.343	8.712	S-3122	0.56	14.224	0.301	7.645	1.20	0.210	0.370	9.398	0.450	2.002	0.190	4.83	0.021	0.53	8.00	SST	C	N
0.343	8.712	11342	0.56	14.224	0.293	7.442	3.30	0.578	0.390	9.906	1.300	5.782	0.170	4.32	0.025	0.64	6.75	SST	CG	N
0.343	8.712	KK-76	0.56	14.224	0.279	7.087	14.00	2.450	0.270	6.858	3.900	17.347	0.210	5.33	0.032	0.81	5.50	SPR	C	N
0.343	8.712	G-87	0.56	14.224	0.261	6.629	37.00	6.475	0.210	5.334	7.600	33.805	0.250	6.35	0.041	1.04	6.00	SPR	CG	Z
0.343	8.712	Q-30	0.63	16.002	0.303	7.696	11.10	0.193	0.450	11.430	0.510	2.268	0.180	4.57	0.020	0.51	8.00	MW	C	N
0.343	8.712	A-60-A	0.63	16.002	0.293	7.442	1.90	0.333	0.350	8.890	0.680	3.025	0.280	7.11	0.025	0.64	10.00	SST	C	N
0.343	8.712	MM-68	0.63	16.002	0.279	7.087	8.70	1.523	0.400	10.160	3.500	15.568	0.220	5.59	0.032	0.81	7.00	SST	CG	N
0.343	8.712	N-46	0.63	16.002	0.273	6.934	18.00	3.150	0.260	6.604	4.800	21.350	0.210	5.33	0.035	0.89	6.00	SPR	C	GI
0.343	8.712	O-94	0.63	16.002	0.269	6.833	23.00	4.025	0.230	5.842	5.300	23.574	0.200	5.08	0.037	0.94	5.50	SST	CG	N
0.343	8.712	S-3119	0.63	16.002	0.261	6.629	37.00	6.475	0.200	5.080	7.200	32.026	0.270	6.86	0.041	1.04	5.50</td			




Century Spring

Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
0.343	8.712 I-20	0.75 19.050	0.257 6.528	29.00 5.075	0.290 7.366	8.200 36.474	0.320 8.13	0.043 1.09	7.50	SST CG	N	
0.343	8.712 GG-70	0.75 19.050	0.243 6.172	79.00 13.825	0.150 3.810	12.000 53.376	0.300 7.62	0.050 1.27	6.00	SST CG	N	
0.343	8.712 CC-100	0.75 19.050	0.239 6.071	62.00 10.850	0.220 5.588	13.000 57.824	0.420 10.67	0.052 1.32	8.00	SST CG	N	
0.343	8.712 Z-57	0.75 19.050	0.229 5.817	100.00 17.500	0.190 4.826	19.000 84.512	0.480 12.19	0.057 1.45	8.50	SPR CG	Z	
0.343	8.712 B14-35	0.75 19.050	0.223 5.664	117.00 20.475	0.180 4.572	22.000 97.856	0.540 13.72	0.060 1.52	9.00	SPR CG	N	
0.343	8.712 FF-69	0.75 19.050	0.223 5.664	113.00 19.775	0.190 4.826	22.000 97.856	0.560 14.22	0.060 1.52	9.25	SPR CG	Z	
0.343	8.712 S-3127	0.75 19.050	0.219 5.563	145.00 25.375	0.155 3.937	22.500 100.080	0.498 12.65	0.063 1.59	8.00	SST CG	N	
0.343	8.712 00-36	0.78 19.812	0.303 7.696	1.50 0.263	0.630 16.002	0.960 4.270	0.150 3.81	0.020 0.51	6.50	MW C	N	
0.343	8.712 10817	0.78 19.812	0.275 6.985	14.00 2.450	0.440 11.176	6.400 28.467	0.220 5.59	0.034 0.86	6.50	MW CG	Z	
0.343	8.712 I-90	0.78 19.812	0.255 6.477	33.00 5.775	0.270 6.858	8.800 39.142	0.330 8.38	0.044 1.12	7.50	SST CG	N	
0.343	8.712 12641	0.78 19.812	0.241 6.121	49.00 8.575	0.260 6.604	13.000 57.824	0.460 11.68	0.051 1.30	9.00	SST CG	N	
0.343	8.712 A-92	0.81 20.574	0.311 7.899	0.60 0.105	0.690 17.526	0.410 1.824	0.120 3.05	0.016 0.41	6.50	MW CG	C	
0.343	8.712 KK-84	0.81 20.574	0.287 7.290	2.90 0.508	0.490 12.446	1.400 6.227	0.320 8.13	0.028 0.71	10.50	SST C	N	
0.343	8.712 M-120	0.81 20.574	0.277 7.036	17.00 2.975	0.240 6.096	3.900 17.347	0.200 5.08	0.033 0.84	5.00	SST C	N	
0.343	8.712 WW-49	0.81 20.574	0.277 7.036	17.00 2.975	0.240 6.096	3.900 17.347	0.200 5.08	0.033 0.84	5.00	SST C	N	
0.343	8.712 XX-22	0.81 20.574	0.277 7.036	7.60 1.330	0.470 11.938	3.600 16.013	0.350 8.89	0.033 0.84	9.50	SPR CG	GI	
0.343	8.712 S-1232	0.81 20.574	0.273 6.934	12.00 2.100	0.390 9.906	4.500 20.016	0.260 6.60	0.035 0.89	7.50	SST CG	N	
0.343	8.712 3020	0.81 20.574	0.235 5.969	84.00 14.700	0.190 4.826	16.000 71.168	0.490 12.45	0.054 1.37	8.00	HD C	Z	
0.343	8.712 A-6	0.81 20.574	0.223 5.664	137.00 23.975	0.160 4.064	22.000 97.856	0.480 12.19	0.060 1.52	8.00	HD CG	Z	
0.343	8.712 B5-17	0.84 21.336	0.279 7.087	13.00 2.275	0.310 7.874	3.900 17.347	0.220 5.59	0.032 0.81	6.00	SPR C	N	
0.343	8.712 A10-66	0.84 21.336	0.219 5.563	160.00 28.000	0.150 3.810	24.000 106.752	0.500 12.70	0.062 1.57	8.00	SPR CG	N	
0.343	8.712 00-59	0.88 22.352	0.311 7.899	0.29 0.051	0.700 17.780	0.200 0.890	0.180 4.57	0.016 0.41	10.00	SST C	N	
0.343	8.712 S-3105	0.88 22.352	0.303 7.696	0.79 0.138	0.670 17.018	0.530 2.357	0.210 5.33	0.020 0.51	9.50	SST C	N	
0.343	8.712 BB-72	0.88 22.352	0.293 7.442	2.40 0.420	0.670 17.018	1.600 7.117	0.210 5.33	0.025 0.64	8.25	SST CG	N	
0.343	8.712 HH-25	0.88 22.352	0.293 7.442	3.90 0.683	0.670 17.018	2.600 11.565	0.190 4.83	0.025 0.64	6.50	MW CG	N	
0.343	8.712 S-3081	0.88 22.352	0.293 7.442	3.80 0.665	0.460 11.684	1.700 7.562	0.180 4.57	0.025 0.64	6.00	SST C	N	
0.343	8.712 L-77	0.88 22.352	0.285 7.239	4.40 0.770	0.600 15.240	2.600 11.565	0.280 7.11	0.029 0.74	9.50	MW CG	GI	
0.343	8.712 Z-1	0.88 22.352	0.283 7.188	6.00 1.050	0.490 12.446	3.000 13.344	0.260 6.60	0.030 0.76	7.50	SST C	N	
0.343	8.712 A15-39	0.88 22.352	0.281 7.137	7.80 1.365	0.420 10.668	3.300 14.678	0.220 5.59	0.031 0.79	7.00	SST CG	N	
0.343	8.712 Q-62	0.88 22.352	0.273 6.934	7.60 1.330	0.510 12.954	3.800 16.902	0.370 9.40	0.035 0.89	10.50	SST CG	N	
0.343	8.712 11398	0.88 22.352	0.269 6.833	12.00 2.100	0.440 11.176	5.300 23.574	0.370 9.40	0.037 0.94	9.00	SST C	N	
0.343	8.712 B6-23	0.88 22.352	0.269 6.833	16.00 2.800	0.340 8.636	5.700 25.354	0.280 7.11	0.037 0.94	7.70	SPR CG	N	
0.343	8.712 0-78	0.88 22.352	0.269 6.833	16.00 2.800	0.360 9.144	5.700 25.354	0.330 8.38	0.037 0.94	8.00	SPR C	GI	
0.343	8.712 10064	0.88 22.352	0.261 6.629	20.00 3.500	0.390 9.906	7.600 33.805	0.390 9.91	0.041 1.04	9.50	SPR CG	Z	
0.343	8.712 3520	0.88 22.352	0.243 6.172	65.00 11.375	0.270 6.858	18.000 80.064	0.380 9.65	0.050 1.27	7.50	MW CG	Z	
0.343	8.712 MM-95	0.88 22.352	0.203 5.156	242.00 42.350	0.130 3.302	32.000 142.336	0.630 16.00	0.070 1.78	9.00	SPR CG	N	
0.343	8.712 MM-86	0.88 22.352	0.199 5.055	307.00 53.725	0.100 2.540	32.000 142.336	0.540 13.72	0.072 1.83	7.50	SST CG	N	
0.343	8.712 B12-25	0.88 22.352	0.191 4.851	315.00 55.125	0.120 3.048	36.000 160.128	0.760 19.30	0.076 1.93	10.00	SPR CG	N	
0.343	8.712 H-82	0.91 23.114	0.261 6.629	11.00 1.925	0.210 5.334	2.200 9.786	0.700 17.78	0.041 1.04	16.00	SPR C	Z	
0.343	8.712 2604	0.91 23.114	0.249 6.325	39.00 6.825	0.410 10.414	16.000 71.168	0.420 10.67	0.047 1.19	9.00	MW CG	Z	
0.343	8.712 0-145	0.91 23.114	0.245 6.223	59.00 10.325	0.220 5.588	13.000 57.824	0.370 9.40	0.049 1.24	7.50	SPR CG	N	
0.343	8.712 Z-4	0.94 23.876	0.293 7.442	2.50 0.438	0.690 17.526	1.700 7.562	0.250 6.35	0.025 0.64	9.00	MW CG	N	
0.343	8.712 U-37	0.94 23.876	0.273 6.934	11.00 1.925	0.420 10.668	4.500 20.016	0.280 7.11	0.035 0.89	8.00	SST CG	N	
0.343	8.712 JJ-86	0.94 23.876	0.259 6.579	21.00 3.675	0.400 10.160	8.200 36.474	0.460 11.68	0.042 1.07	10.00	SPR C	Z	
0.343	8.712 PP-29	0.94 23.876	0.203 5.156	201.00 35.175	0.150 3.810	30.000 133.440	0.670 17.02	0.070 1.78	9.50	SST CG	N	
0.343	8.712 PP-28	0.97 24.638	0.263 6.680	20.00 3.500	0.350 8.890	7.100 31.581	0.340 8.64	0.040 1.02	8.50	SPR CG	Z	
0.343	8.712 3658	1.00 25.400	0.305 7.747	0.79 0.138	0.810 20.574	0.640 2.847	0.190 4.83	0.019 0.48	9.00	MW CG	GI	
0.343	8.712 11469	1.00 25.400	0.303 7.696	1.40 0.245	0.840 21.336	1.100 4.893	0.160 4.06	0.020 0.51	7.00	MW CG	N	
0.343	8.712 11277	1.00 25.400	0.285 7.239	3.80 0.665	0.660 16.764	2.500 11.120	0.340 8.64	0.029 0.74	10.80	MW C	N	
0.343	8.712 B4-13	1.00 25.400	0.283 7.188	5.40 0.945	0.730 18.542	4.000 17.792	0.270 6.86	0.030 0.76	9.00	MW CG	N	
0.343	8.712 B-94	1.00 25.400	0.279 7.087	7.70 1.348	0.500 12.700	3.900 17.347	0.270 6.86	0.032 0.81	8.50	HD CG	Z	
0.343	8.712 3639	1.00 25.400	0.267 6.782	15.00 2.625	0.560 14.224	8.500 37.808	0.380 9.65	0.038 0.97	9.00	MW CG	Z	
0.343	8.712 S-1163	1.00 25.400	0.267 6.782	9.70 1.698	0.530 13.462	5.100 22.685	0.480 12.19	0.038 0.97	11.50	SST C	N	
0.343	8.712 1	1.00 25.400	0.261 6.629	17.90 3.133	0.580 14.732	7.600 33.805	0.460 11.68	0.041 1.04	10.30	HD C	Z	
0.343	8.712 S-313	1.00 25.400	0.261 6.629	13.00 2.275	0.470 11.938	6.000 26.688	0.530 13.46	0.041 1.04	12.00	SST C	N	
0.343	8.712 10375	1.00 25.400	0.255 6.477	22.00 3.850	0.420 10.668	9.400 41.811	0.530 13.46	0.044 1.12	11.00	SPR C	Z	
0.343	8.712 B-14	1.00 25.400	0.253 6.426	26.00 4.550	0.360 9.144	9.400 41.811	0.430 10.92	0.045 1.14	9.50	SST CG	N	
0.343	8.712 2786	1.00 25.400	0.241 6.121	39.00 6.825	0.340 8.636	13.000 57.824	0.610 15.49	0.051 1.30	12.00	SPR CG	Z	
0.343	8.712 K-14	1.00 25.400	0.231 5.867	66.00 11.550	0.270 6.858	18.000 80.064	0.620 15.75	0.056 1.42	11.00	SPR CG	GI	
0.343	8.712 S-268	1.00 25.400	0.225 5.715	94.00 16.450	0.200 5.080	19.000 84.512	0.530 13.46	0.059 1.50	9.00	SST CG	N	
0.343	8.712 S-3097	1.00 25.400	0.173 4.394	543.00 95.025	0.090 2.286	51.000 226.848	0.770 19.56	0.085 2.16	9.00	SST CG	N	
0.343	8.712 Q-5	1.03 26.162	0.295 7.493	1.50 0.263	0.740 18.796	1.100 4.893	0.290 7.37	0.024 0.61	12.00	MW CG	Z	
0.343	8.712 PP-25	1.03 26.162	0.283 7.188	4.20 0.735	0.670 17.018	2.800 12.454	0.360 9.14	0.030 0.76	11.00	MW C	Z	
0.343	8.712 S-1056	1.06 26.924	0.291 7.391	2.20 0.385	0.780 19.812	1.700 7.562	0.290 7.37	0.026 0.66	10.00			




O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh								
mm		mm	mm																	
0.343	8.712	CC-7	1.25	31.750	0.259	6.579	15.00	2.625	0.550	13.970	8.200	36.474	0.550	13.97	0.042	1.07	13.00	SPR	CG	GI
0.343	8.712	B2-40	1.25	31.750	0.255	6.477	23.00	4.025	0.390	9.906	8.800	39.142	0.470	11.94	0.044	1.12	9.75	SST	C	N
0.343	8.712	3842	1.25	31.750	0.159	4.039	724.00	126.700	0.090	2.286	64.000	284.672	1.010	25.65	0.092	2.34	11.00	SPR	CG	GI
0.343	8.712	3505	1.28	32.512	0.273	6.934	7.40	1.295	0.830	21.082	6.100	27.133	0.460	11.68	0.035	0.89	12.00	MW	C	Z
0.343	8.712	B9-23	1.31	33.274	0.257	6.528	16.00	2.800	0.550	13.970	8.800	39.142	0.620	15.75	0.043	1.09	13.50	SPR	C	N
0.343	8.712	L-44	1.38	35.052	0.295	7.493	1.60	0.280	1.000	25.400	1.600	7.117	0.260	6.60	0.024	0.61	10.00	SST	C	N
0.343	8.712	3884	1.38	35.052	0.289	7.341	2.20	0.385	1.000	25.400	2.200	9.786	0.380	9.65	0.027	0.69	13.00	MW	C	Z
0.343	8.712	3457	1.38	35.052	0.279	7.087	7.70	1.348	0.700	17.780	5.400	24.019	0.300	7.62	0.032	0.81	8.50	MW	C	Z
0.343	8.712	L-32	1.44	36.576	0.293	7.442	1.40	0.245	1.000	25.400	1.400	6.227	0.390	9.91	0.025	0.64	14.60	MW	C	Z
0.343	8.712	2594	1.44	36.576	0.249	6.325	27.00	4.725	0.420	10.668	11.000	48.928	0.560	14.22	0.047	1.19	12.00	HD	CG	Z
0.343	8.712	10519	1.47	37.338	0.259	6.579	14.00	2.450	0.590	14.986	8.200	36.474	0.620	15.75	0.042	1.07	13.80	SPR	C	Z
0.343	8.712	S-3101	1.50	38.100	0.293	7.442	1.40	0.245	1.200	30.480	1.600	7.117	0.340	8.64	0.025	0.64	12.80	SST	C	N
0.343	8.712	1951	1.50	38.100	0.283	7.188	3.50	0.613	1.100	27.940	3.700	16.458	0.420	10.67	0.030	0.76	13.00	MW	C	Z
0.343	8.712	12630	1.50	38.100	0.283	7.188	3.80	0.665	1.100	27.940	4.200	18.682	0.390	9.91	0.030	0.76	12.00	MW	C	Z
0.343	8.712	3890	1.50	38.100	0.273	6.934	7.00	1.225	0.680	17.272	4.800	21.350	0.470	11.94	0.035	0.89	12.50	SPR	C	Z
0.343	8.712	UU-47	1.50	38.100	0.269	6.833	6.30	1.103	0.830	21.082	5.200	23.130	0.670	17.02	0.037	0.94	17.00	SPR	C	Z
0.343	8.712	7	1.50	38.100	0.249	6.325	23.00	4.025	0.500	12.700	11.000	48.928	0.710	18.03	0.047	1.19	14.00	HD	CG	Z
0.343	8.712	S-879	1.50	38.100	0.249	6.325	19.00	3.325	0.570	14.478	11.000	48.928	0.690	17.53	0.047	1.19	14.80	SST	CG	N
0.343	8.712	11453	1.50	38.100	0.219	5.563	113.00	19.775	0.210	5.334	24.000	106.752	0.650	16.51	0.062	1.57	10.50	HD	CG	Z
0.343	8.712	B2-53	1.50	38.100	0.213	5.410	96.00	16.800	0.280	7.112	27.000	120.096	0.940	23.88	0.065	1.65	14.50	SPR	CG	N
0.343	8.712	12405	1.53	38.862	0.311	7.899	0.35	0.061	1.400	35.560	0.470	2.091	0.170	4.32	0.016	0.41	9.75	MW	C	Z
0.343	8.712	11546	1.53	38.862	0.257	6.528	17.00	2.975	0.510	12.954	8.800	39.142	0.580	14.73	0.043	1.09	12.50	SPR	CG	Z
0.343	8.712	10188	1.56	39.624	0.303	7.696	0.49	0.086	1.200	30.480	0.600	2.669	0.340	8.64	0.020	0.51	16.00	MW	C	Z
0.343	8.712	Q-36	1.56	39.624	0.271	6.883	5.60	0.980	0.910	23.114	5.100	22.685	0.650	16.51	0.036	0.91	17.00	SPR	C	Z
0.343	8.712	S-1099	1.56	39.624	0.247	6.274	18.00	3.150	0.596	15.138	10.700	47.594	0.746	18.95	0.048	1.21	15.70	SST	CG	N
0.343	8.712	A15-36	1.56	39.624	0.241	6.121	23.00	4.025	0.550	13.970	13.000	57.824	0.870	22.10	0.051	1.30	17.00	SST	CG	N
0.343	8.712	S-210	1.59	40.386	0.287	7.290	1.60	0.280	1.100	27.940	1.700	7.562	0.530	13.46	0.028	0.71	18.00	SST	C	N
0.343	8.712	S-452	1.63	41.402	0.303	7.696	0.20	0.035	0.980	24.892	0.200	0.890	0.650	16.51	0.020	0.51	31.50	SST	C	N
0.343	8.712	S-15	1.63	41.402	0.273	6.934	6.40	1.120	0.700	17.780	4.500	20.016	0.460	11.68	0.035	0.89	12.00	SST	C	N
0.343	8.712	KK-73	1.63	41.402	0.243	6.172	27.00	4.725	0.470	11.938	13.000	57.824	0.760	19.30	0.050	1.27	15.30	SPR	CG	Z
0.343	8.712	S-1384	1.75	44.450	0.303	7.696	0.46	0.081	1.400	35.560	0.650	2.891	0.320	8.13	0.020	0.51	15.00	SST	C	N
0.343	8.712	S-1492	1.81	45.974	0.247	6.274	14.00	2.450	0.767	19.482	10.700	47.594	0.932	23.67	0.048	1.21	20.00	SST	CG	N
0.343	8.712	2933	1.81	45.974	0.227	5.766	40.00	7.000	0.490	12.446	20.000	88.960	1.130	28.70	0.058	1.47	19.50	SPR	CG	Z
0.343	8.712	2683	1.91	48.514	0.227	5.766	50.00	8.750	0.390	9.906	20.000	88.960	0.930	23.62	0.058	1.47	16.00	SPR	CG	Z
0.343	8.712	11199	2.00	50.800	0.293	7.442	0.70	0.123	1.300	33.020	0.910	4.048	0.700	17.78	0.025	0.64	27.00	MW	C	Z
0.343	8.712	1819	2.00	50.800	0.279	7.087	3.10	0.543	1.400	35.560	4.400	19.571	0.610	15.49	0.032	0.81	18.00	MW	C	Z
0.343	8.712	M-10	2.00	50.800	0.271	6.883	4.40	0.770	1.200	30.480	5.200	23.130	0.790	20.07	0.036	0.91	21.00	SPR	C	N
0.343	8.712	A-76	2.00	50.800	0.263	6.680	7.80	1.365	0.910	23.114	7.100	31.581	0.760	19.30	0.040	1.02	19.00	SPR	CG	Z
0.343	8.712	CC-71	2.00	50.800	0.263	6.680	9.40	1.645	0.750	19.050	7.100	31.581	0.680	17.27	0.040	1.02	16.00	SPR	C	N
0.343	8.712	3442	2.00	50.800	0.209	5.309	73.00	12.775	0.470	10.414	29.000	128.992	1.410	35.81	0.067	1.70	21.00	SPR	CG	Z
0.343	8.712	11466	2.13	54.102	0.293	7.442	0.69	0.121	1.500	38.100	1.000	4.448	0.640	16.26	0.025	0.64	24.50	SST	C	N
0.343	8.712	W-30	2.13	54.102	0.249	6.325	15.00	2.625	0.760	19.304	11.000	48.928	0.940	23.88	0.047	1.19	20.00	HD	CG	N
0.343	8.712	10437	2.16	54.864	0.293	7.442	0.78	0.137	1.500	38.100	1.200	5.338	0.640	16.26	0.025	0.64	24.50	MW	C	Z
0.343	8.712	11722	2.16	54.864	0.289	7.341	2.20	0.385	1.350	38.100	3.200	14.234	0.380	9.65	0.027	0.69	13.00	MW	C	Z
0.343	8.712	Q-38	2.25	57.150	0.291	7.391	0.87	0.152	1.600	40.640	1.300	5.782	0.700	17.78	0.026	0.66	25.80	MW	C	N
0.343	8.712	S-225	2.28	57.912	0.191	4.851	128.00	22.400	0.290	7.366	37.000	164.576	1.480	37.59	0.076	1.93	19.50	SST	CG	N
0.343	8.712	3691	2.34	59.436	0.289	7.341	1.60	0.280	1.900	48.260	3.000	13.344	0.490	12.45	0.027	0.69	17.00	MW	C	Z
0.343	8.712	10868	2.44	61.976	0.243	6.172	22.00	3.850	0.570	14.478	13.000	57.824	0.950	24.13	0.050	1.27	18.00	SPR	C	BO
0.343	8.712	B15-49	2.50	63.500	0.297	7.544	0.61	0.107	2.000	50.800	1.200	5.338	0.530	13.46	0.023	0.58	22.00	MW	C	N
0.343	8.712	J-29	2.50	63.500	0.257	6.528	8.30	1.453	1.100	27.940	8.800	39.142	1.030	26.16	0.043	1.09	24.00	SPR	CG	Z
0.343	8.712	3896	2.63	66.802	0.239	6.071	18.00	3.150	0.790	20.066	14.000	62.272	1.380	35.05	0.052	1.32	25.50	SPR	C	Z
0.343	8.712	11880	3.00	76.200	0.291	7.391	0.76	0.133	2.300	58.420	1.800	8.006	0.700	17.78	0.026	0.66	26.00	SST	C	N
0.343	8.712	QQ-52	3.00	76.200	0.253	6.426	6.90	1.208	1.400	35.560	9.400	41.811	1.400</							




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
0.36	9.144	LL-67	0.41 10.414	0.270 6.858	84.00 14.700	0.110 2.794	9.000 40.032	0.180 4.57	0.045 1.14	4.00	SST CG	N
0.36	9.144	G-51	0.41 10.414	0.250 6.350	187.00 32.725	0.090 2.286	16.000 71.168	0.250 6.35	0.055 1.40	4.50	SPR CG	Z
0.36	9.144	10956	0.44 11.176	0.314 7.976	4.70 0.823	0.320 8.128	1.500 6.672	0.120 3.05	0.023 0.58	4.25	MW CG	N
0.36	9.144	71027	0.44 11.176	0.308 7.823	10.00 1.750	0.270 6.858	2.800 12.454	0.100 2.54	0.026 0.66	3.75	MW CG	N
0.36	9.144	71027S	0.44 11.176	0.308 7.823	8.70 1.523	0.210 5.334	1.900 8.451	0.100 2.54	0.026 0.66	3.75	SST CG	N
0.36	9.144	71046	0.44 11.176	0.302 7.671	15.00 2.625	0.260 6.604	3.800 16.902	0.110 2.79	0.029 0.74	3.88	MW CG	N
0.36	9.144	71046S	0.44 11.176	0.302 7.671	12.00 2.100	0.210 5.334	2.600 11.565	0.110 2.79	0.029 0.74	3.88	SST CG	N
0.36	9.144	II-83	0.44 11.176	0.298 7.569	5.50 0.963	0.160 4.064	0.870 3.870	0.280 7.11	0.031 0.79	8.00	SST C	N
0.36	9.144	71065	0.44 11.176	0.296 7.518	21.00 3.675	0.250 6.350	5.100 22.685	0.130 3.30	0.032 0.81	4.00	MW CG	N
0.36	9.144	71065S	0.44 11.176	0.296 7.518	18.00 3.150	0.190 4.826	3.400 15.123	0.130 3.30	0.032 0.81	4.00	SST CG	N
0.36	9.144	71083	0.44 11.176	0.290 7.366	28.00 4.900	0.230 5.842	6.300 28.022	0.150 3.81	0.035 0.89	4.25	MW CG	N
0.36	9.144	71083S	0.44 11.176	0.290 7.366	24.00 4.200	0.180 4.572	4.300 19.126	0.150 3.81	0.035 0.89	4.25	SST CG	N
0.36	9.144	71101	0.44 11.176	0.284 7.214	38.00 6.650	0.210 5.334	8.100 36.029	0.170 4.32	0.038 0.97	4.38	MW CG	N
0.36	9.144	71101S	0.44 11.176	0.284 7.214	32.00 5.600	0.170 4.318	5.500 24.464	0.170 4.32	0.038 0.97	4.38	SST CG	N
0.36	9.144	G-45	0.44 11.176	0.282 7.163	41.00 7.175	0.160 4.064	6.300 28.022	0.210 5.33	0.039 0.99	4.50	SPR C	Z
0.36	9.144	71119	0.44 11.176	0.280 7.112	45.00 7.875	0.210 5.334	9.400 41.811	0.180 4.57	0.040 1.02	4.50	MW CG	N
0.36	9.144	71119S	0.44 11.176	0.280 7.112	38.00 6.650	0.170 4.318	6.400 28.467	0.180 4.57	0.040 1.02	4.50	SST CG	N
0.36	9.144	I-15	0.44 11.176	0.280 7.112	45.00 7.875	0.150 3.810	6.800 30.246	0.180 4.57	0.040 1.02	4.50	SPR CG	Z
0.36	9.144	71137	0.44 11.176	0.276 7.010	57.00 9.975	0.190 4.826	11.000 48.928	0.190 4.83	0.042 1.07	4.50	MW CG	N
0.36	9.144	71137S	0.44 11.176	0.276 7.010	48.00 8.400	0.150 3.810	7.300 32.470	0.190 4.83	0.042 1.07	4.50	SST CG	N
0.36	9.144	71155	0.44 11.176	0.270 6.858	77.00 13.475	0.170 4.318	13.000 57.824	0.200 5.08	0.045 1.14	4.50	MW CG	N
0.36	9.144	71155S	0.44 11.176	0.270 6.858	65.00 11.375	0.140 3.556	9.000 40.032	0.200 5.08	0.045 1.14	4.50	SST CG	N
0.36	9.144	71174	0.44 11.176	0.266 6.756	93.00 16.275	0.160 4.064	15.000 66.720	0.210 5.33	0.047 1.19	4.50	MW CG	N
0.36	9.144	71174S	0.44 11.176	0.266 6.756	79.00 13.825	0.130 3.302	10.000 44.480	0.210 5.33	0.047 1.19	4.50	SST CG	N
0.36	9.144	S-1505	0.44 11.176	0.266 6.756	67.00 11.725	0.150 3.810	10.000 44.480	0.240 6.10	0.047 1.19	5.00	SST CG	N
0.36	9.144	71196	0.44 11.176	0.262 6.655	109.00 19.075	0.160 4.064	17.000 75.616	0.220 5.59	0.049 1.24	4.50	MW CG	N
0.36	9.144	71196S	0.44 11.176	0.262 6.655	93.00 16.275	0.120 3.048	12.000 53.376	0.220 5.59	0.049 1.24	4.50	SST CG	N
0.36	9.144	AA-95	0.44 11.176	0.262 6.655	93.00 16.275	0.130 3.302	12.000 53.376	0.250 6.35	0.049 1.24	5.00	SPR CG	N
0.36	9.144	S-1100	0.44 11.176	0.262 6.655	60.00 10.500	0.140 3.556	8.700 38.698	0.290 7.37	0.049 1.24	6.00	SST CG	N
0.36	9.144	71218	0.44 11.176	0.258 6.553	127.00 22.225	0.140 3.556	18.000 80.064	0.240 6.10	0.051 1.30	4.63	MW CG	N
0.36	9.144	71218S	0.44 11.176	0.258 6.553	108.00 18.900	0.110 2.794	12.000 53.376	0.240 6.10	0.051 1.30	4.63	SST CG	N
0.36	9.144	71240	0.44 11.176	0.250 6.350	175.00 30.625	0.130 3.302	22.000 97.856	0.250 6.35	0.055 1.40	4.63	MW CG	N
0.36	9.144	71240S	0.44 11.176	0.250 6.350	149.00 26.075	0.100 2.540	15.000 66.720	0.250 6.35	0.055 1.40	4.63	SST CG	N
0.36	9.144	JJ-56	0.44 11.176	0.250 6.350	187.00 32.725	0.090 2.286	16.000 71.168	0.300 7.62	0.055 1.40	4.50	SPR C	N
0.36	9.144	71262	0.44 11.176	0.242 6.147	238.00 41.650	0.110 2.794	27.000 120.096	0.270 6.86	0.059 1.50	4.63	MW CG	N
0.36	9.144	71262S	0.44 11.176	0.242 6.147	202.00 35.350	0.090 2.286	18.000 80.064	0.270 6.86	0.059 1.50	4.63	SST CG	N
0.36	9.144	M-71	0.47 11.938	0.286 7.264	27.00 4.725	0.200 5.080	5.400 24.019	0.190 4.83	0.037 0.94	5.00	SPR CG	Z
0.36	9.144	EE-72	0.47 11.938	0.276 7.010	56.00 9.800	0.140 3.556	7.800 34.694	0.190 4.83	0.042 1.07	4.50	SPR CG	Z
0.36	9.144	A10-31	0.47 11.938	0.244 6.198	93.00 16.275	0.150 3.810	14.000 62.272	0.320 8.13	0.058 1.47	5.50	PB CG	N
0.36	9.144	S-133	0.47 11.938	0.234 5.944	258.00 45.150	0.084 2.134	22.000 97.856	0.320 8.13	0.063 1.59	5.00	SST CG	N
0.36	9.144	LL-6	0.50 12.700	0.320 8.128	1.00 0.175	0.340 8.636	0.330 1.468	0.170 4.32	0.020 0.51	7.25	SST C	N
0.36	9.144	A-52	0.50 12.700	0.310 7.874	7.50 1.313	0.330 8.382	2.500 11.120	0.130 3.30	0.025 0.64	4.00	MW CG	Z
0.36	9.144	10076	0.50 12.700	0.308 7.823	8.90 1.558	0.310 7.874	2.800 12.454	0.100 2.54	0.026 0.66	4.00	MW CG	Z
0.36	9.144	71028	0.50 12.700	0.308 7.823	9.10 1.593	0.300 7.620	2.800 12.454	0.100 2.54	0.026 0.66	4.00	MW CG	N
0.36	9.144	71028S	0.50 12.700	0.308 7.823	7.70 1.348	0.240 6.096	1.900 8.451	0.100 2.54	0.026 0.66	4.00	SST CG	N
0.36	9.144	1627	0.50 12.700	0.306 7.772	10.00 1.750	0.300 7.620	3.100 13.789	0.140 3.56	0.027 0.69	4.00	MW CG	Z
0.36	9.144	A15-13	0.50 12.700	0.306 7.772	9.30 1.628	0.220 5.588	2.100 9.341	0.110 2.79	0.027 0.69	4.00	SST CG	N
0.36	9.144	71047	0.50 12.700	0.302 7.671	13.00 2.275	0.310 7.874	3.800 16.902	0.120 3.05	0.029 0.74	4.25	MW CG	N
0.36	9.144	71047S	0.50 12.700	0.302 7.671	11.00 1.925	0.240 6.096	2.600 11.565	0.120 3.05	0.029 0.74	4.25	SST CG	N
0.36	9.144	10073	0.50 12.700	0.298 7.569	13.00 2.275	0.310 7.874	3.900 17.347	0.190 4.83	0.031 0.79	5.00	MW C	Z
0.36	9.144	3571	0.50 12.700	0.296 7.518	17.00 2.975	0.300 7.620	5.100 22.685	0.180 4.57	0.032 0.81	4.50	MW C	Z
0.36	9.144	71066	0.50 12.700	0.296 7.518	18.00 3.150	0.290 7.366	5.100 22.685	0.140 3.56	0.032 0.81	4.38	MW CG	N
0.36	9.144	71066S	0.50 12.700	0.296 7.518	15.00 2.625	0.220 5.588	3.400 15.123	0.140 3.56	0.032 0.81	4.38	SST CG	N
0.36	9.144	71084	0.50 12.700	0.290 7.366	24.00 4.200	0.260 6.604	6.300 28.022	0.160 4.06	0.035 0.89	4.63	MW CG	N
0.36	9.144	71084S	0.50 12.700	0.290 7.366	20.00 3.500	0.210 5.334	4.300 19.126	0.160 4.06	0.035 0.89	4.63	SST CG	N
0.36	9.144	10122	0.50 12.700	0.285 7.239	27.00 4.725	0.210 5.334	5.600 24.909	0.190 4.83	0.037 0.94	5.00	SPR CG	Z
0.36	9.144	71102	0.50 12.700	0.284 7.214	33.00 5.775	0.240 6.096	8.100 36.029	0.180 4.57	0.038 0.97	4.75	MW CG	N
0.36	9.144	71102S	0.50 12.700	0.284 7.214	28.00 4.900	0.190 4.826	5.500 24.464	0.180 4.57	0.038 0.97	4.75	SST CG	N
0.36	9.144	K-79	0.50 12.700	0.284 7.214	32.00 5.600	0.170 4.318	5.500 24.464	0.210 5.33	0.038 0.97	4.50	SST C	N
0.36	9.144	71120	0.50 12.700	0.280 7.112	39.00 6.825	0.240 6.096	9.400 41.811	0.200 5.08	0.040 1.02	4.88	MW CG	N
0.36	9.144	71120S	0.50 12.700	0.280 7.112	33.00 5.775	0.240 6.096	8.100 36.029	0.180 4.57	0.038 0.97	4.75	SST CG	N
0.36	9.144	A10-7	0.50 12.700	0.278 7.061	37.00 6.475	0.180 4.572	6.800 30.246	0.210 5.33	0.041 1.04	5.00	SST CG	N
0.36	9.144	WW-67	0.50 12.700	0.278 7.061	28.00 4.900	0.230 5.842	6.600 29.357	0.270 6.86	0.041 1.04	6.50	SPR CG	Z
0.36	9.144	71138	0.50 12.700	0.276 7.010	47.00 8.225	0.230 5.842	11.000 48.928	0.210 5.33	0.042 1.07	5.00	MW CG	N
0.36	9.144	71138S	0.50 12.700	0.276 7.010								




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
0.36	9.144	3656	0.50	12.700	0.200	5.080	1084.00	189.700	0.040	1.016	44.000	195.712	0.360	9.14	0.080	2.03	4.50	SPR	CG	Z
0.36	9.144	B5-10	0.53	13.462	0.318	8.077	3.60	0.630	0.430	10.922	1.600	7.117	0.080	2.03	0.021	0.53	4.00	MW	CG	N
0.36	9.144	M-82	0.53	13.462	0.300	7.620	7.30	1.278	0.350	8.890	2.500	11.120	0.180	4.57	0.030	0.76	6.00	SST	CG	N
0.36	9.144	A13-20	0.53	13.462	0.294	7.468	15.00	2.625	0.260	6.604	3.800	16.902	0.170	4.32	0.033	0.84	5.00	SST	CG	N
0.36	9.144	A13-14	0.53	13.462	0.268	6.807	56.00	9.800	0.170	4.318	9.600	42.701	0.250	6.35	0.046	1.17	5.33	SST	CG	N
0.36	9.144	Y-14	0.53	13.462	0.264	6.706	113.00	19.775	0.100	2.540	12.000	53.376	0.200	5.08	0.048	1.22	4.25	SPR	CG	N
0.36	9.144	12622	0.53	13.462	0.260	6.604	101.00	17.675	0.120	3.048	12.000	53.376	0.250	6.35	0.050	1.27	5.00	SPR	CG	N
0.36	9.144	KK-89	0.53	13.462	0.260	6.604	101.00	17.675	0.110	2.794	11.000	48.928	0.250	6.35	0.050	1.27	5.00	SST	CG	N
0.36	9.144	S-26	0.53	13.462	0.258	6.553	74.00	12.950	0.160	4.064	12.000	53.376	0.360	9.14	0.051	1.30	6.00	SST	C	N
0.36	9.144	12646	0.55	13.970	0.294	7.468	9.40	1.645	0.330	8.382	3.100	13.789	0.220	5.59	0.033	0.84	6.50	SST	CG	N
0.36	9.144	U-97	0.56	14.224	0.332	8.433	0.45	0.079	0.480	12.192	0.210	0.934	0.080	2.03	0.014	0.36	5.00	MW	C	Z
0.36	9.144	B18-132	0.56	14.224	0.312	7.925	5.10	0.893	0.450	11.430	2.300	10.230	0.110	2.79	0.024	0.61	4.50	MW	CG	Z
0.36	9.144	71029	0.56	14.224	0.308	7.823	8.10	1.418	0.340	8.636	2.800	12.454	0.110	2.79	0.026	0.66	4.13	MW	CG	N
0.36	9.144	71029S	0.56	14.224	0.308	7.823	6.90	1.208	0.270	6.858	1.900	8.451	0.110	2.79	0.026	0.66	4.13	SST	CG	N
0.36	9.144	71048	0.56	14.224	0.302	7.671	11.00	1.925	0.350	8.890	3.800	16.902	0.130	3.30	0.029	0.74	4.50	MW	CG	N
0.36	9.144	71048S	0.56	14.224	0.302	7.671	9.40	1.645	0.270	6.858	2.600	11.565	0.130	3.30	0.029	0.74	4.50	SST	CG	N
0.36	9.144	71067	0.56	14.224	0.296	7.518	16.00	2.800	0.320	8.128	5.100	22.685	0.150	3.81	0.032	0.81	4.63	MW	CG	N
0.36	9.144	71067S	0.56	14.224	0.296	7.518	14.00	2.450	0.250	6.350	3.400	15.123	0.150	3.81	0.032	0.81	4.63	SST	CG	N
0.36	9.144	10486	0.56	14.224	0.294	7.468	16.00	2.800	0.250	6.350	4.000	17.792	0.170	4.32	0.033	0.84	5.00	SPR	CG	GI
0.36	9.144	71085	0.56	14.224	0.290	7.366	21.00	3.675	0.300	7.620	6.300	28.022	0.180	4.57	0.035	0.89	5.00	MW	CG	N
0.36	9.144	71085S	0.56	14.224	0.290	7.366	18.00	3.150	0.240	6.096	4.300	19.126	0.180	4.57	0.035	0.89	5.00	SST	CG	N
0.36	9.144	10029	0.56	14.224	0.284	7.214	30.00	5.250	0.190	4.826	5.800	25.798	0.190	4.83	0.038	0.97	5.00	SPR	CG	Z
0.36	9.144	71103	0.56	14.224	0.284	7.214	28.00	4.900	0.280	7.112	8.100	36.029	0.190	4.83	0.038	0.97	5.13	MW	CG	N
0.36	9.144	71103S	0.56	14.224	0.284	7.214	24.00	4.200	0.230	5.842	5.500	24.464	0.190	4.83	0.038	0.97	5.13	SST	CG	N
0.36	9.144	HH-96	0.56	14.224	0.284	7.214	20.00	3.500	0.280	7.112	5.500	24.464	0.270	6.86	0.038	0.97	6.00	SST	C	N
0.36	9.144	71121	0.56	14.224	0.280	7.112	34.00	5.950	0.280	7.112	9.400	41.811	0.220	5.59	0.040	1.02	5.38	MW	CG	N
0.36	9.144	71121S	0.56	14.224	0.280	7.112	29.00	5.075	0.220	5.588	6.400	28.467	0.220	5.59	0.040	1.02	5.38	SST	CG	N
0.36	9.144	71139	0.56	14.224	0.276	7.010	42.00	7.350	0.260	6.604	11.000	48.928	0.230	5.84	0.042	1.07	5.38	MW	CG	N
0.36	9.144	71139S	0.56	14.224	0.276	7.010	35.00	6.125	0.210	5.334	7.300	32.470	0.230	5.84	0.042	1.07	5.38	SST	CG	N
0.36	9.144	B4-68	0.56	14.224	0.274	6.960	44.00	7.700	0.260	6.604	12.000	53.376	0.280	7.11	0.043	1.09	5.50	MW	C	Z
0.36	9.144	71157	0.56	14.224	0.270	6.858	56.00	9.800	0.240	6.096	13.000	57.824	0.240	6.10	0.045	1.14	5.38	MW	CG	N
0.36	9.144	71157S	0.56	14.224	0.270	6.858	47.00	8.225	0.190	4.826	9.000	40.032	0.240	6.10	0.045	1.14	5.38	SST	CG	N
0.36	9.144	71176	0.56	14.224	0.266	6.756	69.00	12.075	0.220	5.588	15.000	66.720	0.250	6.35	0.047	1.19	5.38	MW	CG	N
0.36	9.144	71176S	0.56	14.224	0.266	6.756	58.00	10.150	0.170	4.318	10.000	44.480	0.250	6.35	0.047	1.19	5.38	SST	CG	N
0.36	9.144	71198	0.56	14.224	0.262	6.655	80.00	14.000	0.210	5.334	17.000	75.616	0.260	6.60	0.049	1.24	5.38	MW	CG	N
0.36	9.144	71220	0.56	14.224	0.258	6.553	94.00	16.450	0.190	4.826	18.000	80.064	0.280	7.11	0.051	1.30	5.50	MW	CG	N
0.36	9.144	71220S	0.56	14.224	0.258	6.553	80.00	14.000	0.150	3.810	12.000	53.376	0.280	7.11	0.051	1.30	5.50	SST	CG	N
0.36	9.144	71242	0.56	14.224	0.250	6.350	128.00	22.400	0.170	4.318	22.000	97.856	0.310	7.87	0.055	1.40	5.63	MW	CG	N
0.36	9.144	71242S	0.56	14.224	0.250	6.350	109.00	19.075	0.140	3.556	15.000	66.720	0.310	7.87	0.055	1.40	5.63	SST	CG	N
0.36	9.144	71264	0.56	14.224	0.242	6.147	173.00	30.275	0.160	4.064	27.000	120.096	0.330	8.38	0.059	1.50	5.63	MW	CG	N
0.36	9.144	71264S	0.56	14.224	0.242	6.147	147.00	25.725	0.130	3.302	18.000	80.064	0.330	8.38	0.059	1.50	5.63	SST	CG	N
0.36	9.144	3247	0.56	14.224	0.234	5.944	291.00	50.925	0.080	2.032	24.000	106.752	0.380	9.65	0.063	1.60	5.00	SPR	C	Z
0.36	9.144	A14-48	0.59	14.986	0.316	8.026	3.80	0.665	0.470	11.938	1.800	8.006	0.100	2.54	0.022	0.56	4.33	MW	CG	N
0.36	9.144	A11-54	0.59	14.986	0.276	7.010	31.00	5.425	0.240	6.096	7.300	32.470	0.250	6.35	0.042	1.07	6.00	SST	CG	N
0.36	9.144	BB-17	0.59	14.986	0.266	6.756	50.00	8.750	0.200	5.080	10.000	44.480	0.280	7.11	0.047	1.19	6.00	SST	CG	N
0.36	9.144	KK-47	0.59	14.986	0.264	6.706	51.00	8.925	0.230	5.842	12.000	53.376	0.340	8.64	0.048	1.22	7.00	SPR	CG	N
0.36	9.144	A12-5	0.63	16.002	0.322	8.179	1.40	0.245	0.500	12.700	0.680	3.025	1.20	3.05	0.019	0.48	5.50	MW	C	Z
0.36	9.144	G-65	0.63	16.002	0.318	8.077	3.20	0.560	0.480	12.192	1.600	7.117	0.110	2.79	0.021	0.53	4.25	MW	C	N
0.36	9.144	S-923	0.63	16.002	0.312	7.925	2.00	0.350	0.420	10.668	0.840	3.736	0.200	5.08	0.024	0.61	7.50	SST	C	N
0.36	9.144	3859	0.63	16.002	0.310	7.874	2.00	0.350	0.360	9.144	0.730	3.247	0.260	6.60	0.025	0.64	9.50	MW	C	Z
0.36	9.144	71030	0.63	16.002	0.308	7.823	7.20	1.260	0.380	9.652	2.800	12.454	0.120	3.05	0.026	0.66	4.50	MW	CG	N
0.36	9.144	71030S	0.63	16.002	0.308	7.823	6.10	1.068	0.300	7.620	1.900	8.451	0.120	3.05	0.026	0.66	4.50	SST	CG	N
0.36	9.144	B12-28	0.63	16.002	0.308	7.823	7.10	1.243	0.390	9.906	2.800	12.454	0.120	3.05	0.026	0.66	4.50	MW	CG	N
0.36	9.144	B1-45	0.63	16.002	0.308	7.823	6.30	1.103	0.290	7.366	1.900	8.451								




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.36	9.144	7117S	0.63	16.002	0.266	6.756	52.00	9.100	0.200	5.080	10.000	44.480	0.270	6.86	0.047	1.19	5.75	SST	CG	N
0.36	9.144	7119	0.63	16.002	0.262	6.655	71.00	12.425	0.240	6.096	17.000	75.616	0.290	7.37	0.049	1.24	5.88	MW	CG	N
0.36	9.144	7119S	0.63	16.002	0.262	6.655	60.00	10.500	0.190	4.826	12.000	53.376	0.290	7.37	0.049	1.24	5.88	SST	CG	N
0.36	9.144	71221	0.63	16.002	0.258	6.553	83.00	14.525	0.220	5.588	18.000	80.064	0.310	7.87	0.051	1.30	6.00	MW	CG	N
0.36	9.144	71221S	0.63	16.002	0.258	6.553	70.00	12.250	0.170	4.318	12.000	53.376	0.310	7.87	0.051	1.30	6.00	SST	CG	N
0.36	9.144	71243	0.63	16.002	0.250	6.350	113.00	19.775	0.200	5.080	22.000	97.856	0.340	8.64	0.055	1.40	6.13	MW	CG	N
0.36	9.144	71243S	0.63	16.002	0.250	6.350	96.00	16.800	0.160	4.064	15.000	66.720	0.340	8.64	0.055	1.40	6.13	SST	CG	N
0.36	9.144	71265	0.63	16.002	0.242	6.147	153.00	26.775	0.180	4.572	27.000	120.096	0.360	9.14	0.059	1.50	6.13	MW	CG	N
0.36	9.144	71265S	0.63	16.002	0.242	6.147	130.00	22.750	0.140	3.556	18.000	80.064	0.360	9.14	0.059	1.50	6.13	SST	CG	N
0.36	9.144	JJ-53	0.66	16.764	0.284	7.214	23.00	4.025	0.260	6.604	5.800	25.798	0.230	5.84	0.038	0.97	6.00	SPR	CG	N
0.36	9.144	10954	0.66	16.764	0.266	6.756	42.00	7.350	0.260	6.604	11.000	48.928	0.400	10.16	0.047	1.19	7.50	SPR	C	N
0.36	9.144	12695	0.67	17.018	0.236	5.994	134.00	23.450	0.180	4.572	24.000	106.752	0.500	12.70	0.062	1.57	8.00	MW	CG	N
0.36	9.144	B5-16	0.69	17.526	0.314	7.976	4.20	0.735	0.480	12.192	2.000	8.896	0.130	3.30	0.023	0.58	4.50	MW	C	N
0.36	9.144	B4-8	0.69	17.526	0.312	7.925	1.30	0.228	0.380	9.652	0.470	2.091	0.310	7.87	0.024	0.61	12.00	MW	C	Z
0.36	9.144	J-25	0.69	17.526	0.310	7.874	5.50	0.963	0.450	11.430	2.500	11.120	0.140	3.56	0.025	0.64	4.75	MW	C	Z
0.36	9.144	71031	0.69	17.526	0.308	7.823	6.60	1.155	0.420	10.668	2.800	12.454	0.120	3.05	0.026	0.66	4.63	MW	CG	N
0.36	9.144	71031S	0.69	17.526	0.308	7.823	5.60	0.980	0.330	8.382	1.900	8.451	0.120	3.05	0.026	0.66	4.63	SST	CG	N
0.36	9.144	71050	0.69	17.526	0.302	7.671	8.60	1.505	0.450	11.430	3.800	16.902	0.150	3.81	0.029	0.74	5.25	MW	CG	N
0.36	9.144	71050S	0.69	17.526	0.302	7.671	7.30	1.278	0.350	8.890	2.600	11.565	0.150	3.81	0.029	0.74	5.25	SST	CG	N
0.36	9.144	71069	0.69	17.526	0.296	7.518	13.00	2.275	0.400	10.160	5.100	22.685	0.170	4.32	0.032	0.81	5.25	MW	CG	N
0.36	9.144	71069S	0.69	17.526	0.296	7.518	11.00	1.925	0.310	7.874	3.400	15.123	0.170	4.32	0.032	0.81	5.25	SST	CG	N
0.36	9.144	71087	0.69	17.526	0.290	7.366	16.00	2.800	0.390	9.906	6.300	28.022	0.210	5.33	0.035	0.89	5.88	MW	CG	N
0.36	9.144	71087S	0.69	17.526	0.290	7.366	14.00	2.450	0.310	7.874	4.300	19.126	0.210	5.33	0.035	0.89	5.88	SST	CG	N
0.36	9.144	71105	0.69	17.526	0.284	7.214	22.00	3.850	0.370	9.398	8.100	36.029	0.230	5.84	0.038	0.97	6.13	MW	CG	N
0.36	9.144	71105S	0.69	17.526	0.284	7.214	19.00	3.325	0.290	7.366	5.500	24.464	0.230	5.84	0.038	0.97	6.13	SST	CG	N
0.36	9.144	71123	0.69	17.526	0.280	7.112	27.00	4.725	0.350	8.890	9.400	41.811	0.250	6.35	0.040	1.02	6.25	MW	CG	N
0.36	9.144	71123S	0.69	17.526	0.280	7.112	23.00	4.025	0.280	7.112	6.400	28.467	0.250	6.35	0.040	1.02	6.25	SST	CG	N
0.36	9.144	W-45	0.69	17.526	0.280	7.112	20.00	3.500	0.320	8.128	6.400	28.467	0.280	7.11	0.040	1.02	7.00	SST	CG	N
0.36	9.144	71141	0.69	17.526	0.276	7.010	34.00	5.950	0.320	8.128	11.000	48.928	0.260	6.60	0.042	1.07	6.13	MW	CG	N
0.36	9.144	71141S	0.69	17.526	0.276	7.010	28.00	4.900	0.260	6.604	7.300	32.470	0.260	6.60	0.042	1.07	6.13	SST	CG	N
0.36	9.144	A13-11	0.69	17.526	0.274	6.960	32.00	5.600	0.250	6.350	7.900	35.139	0.270	6.86	0.043	1.09	6.25	SST	CG	N
0.36	9.144	71159	0.69	17.526	0.270	6.858	44.00	7.700	0.300	7.620	13.000	57.824	0.280	7.11	0.045	1.14	6.25	MW	CG	N
0.36	9.144	71159S	0.69	17.526	0.270	6.858	37.00	6.475	0.240	6.096	9.000	40.032	0.280	7.11	0.045	1.14	6.25	SST	CG	N
0.36	9.144	N-68	0.69	17.526	0.270	6.858	24.00	4.200	0.240	6.096	5.700	25.354	0.450	11.43	0.045	1.14	9.00	SST	C	Z
0.36	9.144	3668	0.69	17.526	0.268	6.807	52.00	9.100	0.190	4.826	10.000	44.480	0.320	8.13	0.046	1.17	6.00	SPR	C	Z
0.36	9.144	71178	0.69	17.526	0.266	6.756	54.00	9.450	0.280	7.112	15.000	66.720	0.290	7.37	0.047	1.19	6.25	MW	CG	N
0.36	9.144	71178S	0.69	17.526	0.266	6.756	46.00	8.050	0.220	5.588	10.000	44.480	0.290	7.37	0.047	1.19	6.25	SST	CG	N
0.36	9.144	71200	0.69	17.526	0.262	6.655	63.00	11.025	0.270	6.858	17.000	75.616	0.310	7.87	0.049	1.24	6.38	MW	CG	N
0.36	9.144	71200S	0.69	17.526	0.262	6.655	53.00	9.275	0.220	5.588	12.000	53.376	0.310	7.87	0.049	1.24	6.38	SST	CG	N
0.36	9.144	71222	0.69	17.526	0.258	6.553	73.00	12.775	0.250	6.350	18.000	80.064	0.330	8.38	0.051	1.30	6.50	MW	CG	N
0.36	9.144	71222S	0.69	17.526	0.258	6.553	62.00	10.850	0.200	5.080	12.000	53.376	0.330	8.38	0.051	1.30	6.50	SST	CG	N
0.36	9.144	71244	0.69	17.526	0.250	6.350	100.00	17.500	0.220	5.588	22.000	97.856	0.360	9.14	0.055	1.40	6.63	MW	CG	N
0.36	9.144	71244S	0.69	17.526	0.250	6.350	85.00	14.875	0.180	4.572	15.000	66.720	0.360	9.14	0.055	1.40	6.63	SST	CG	N
0.36	9.144	71266	0.69	17.526	0.242	6.147	134.00	23.450	0.200	5.080	27.000	120.096	0.400	10.16	0.059	1.50	6.75	MW	CG	N
0.36	9.144	71266S	0.69	17.526	0.242	6.147	114.00	19.950	0.160	4.064	18.000	80.064	0.400	10.16	0.059	1.50	6.75	SST	CG	N
0.36	9.144	00-37	0.69	17.526	0.240	6.096	100.00	17.500	0.150	3.810	15.000	66.720	0.540	13.72	0.060	1.52	9.00	SPR	CG	N
0.36	9.144	11223	0.72	18.288	0.318	8.077	1.30	0.228	0.540	13.716	0.710	3.158	0.180	4.57	0.021	0.53	7.50	MW	C	N
0.36	9.144	B12-8	0.72	18.288	0.270	6.858	45.00	7.875	0.210	5.334	9.600	42.701	0.280	7.11	0.045	1.14	6.25	SPR	CG	Z
0.36	9.144	3596	0.72	18.288	0.210	5.334	331.00	57.925	0.110	2.794	37.000	164.576	0.600	15.24	0.075	1.91	8.00	SPR	CG	Z
0.36	9.144	B12-18	0.75	19.050	0.316	8.026	2.90	0.508	0.610	15.494	1.800	8.006	0.110	2.79	0.022	0.56	5.00	MW	CG	N
0.36	9.144	M-110	0.75	19.050	0.310	7.874	5.00	0.875	0.490	12.446	2.500	11.120	0.150	3.81	0.025	0.64	5.00	MW	C	GI
0.36	9.144	71032	0.75	19.050	0.308	7.823	6.10	1.068	0.460	11.684	2.800	12.454	0.130	3.30	0.026	0.66	4.88	MW	CG	N
0.36	9.144	B12-22	0.75	19.050	0.306	7.772	6.40	1.120	0.480	12.192	3.100	13.789	0.140	3.56	0.027	0.69	5.25	MW	CG	GI
0.36	9.144	71051	0.75	19.050	0.302	7.671	7.90	1.383	0.											




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends E F sh									
0.36	9.144	71201	0.75	19.050	0.262	6.655	57.00	9.975	0.300	7.620	17.000	75.616	0.340	8.64	0.049	1.24	6.88	MW	CG	N
0.36	9.144	71201S	0.75	19.050	0.262	6.655	48.00	8.400	0.240	6.096	12.000	53.376	0.340	8.64	0.049	1.24	6.88	SST	CG	Z
0.36	9.144	2612	0.75	19.050	0.260	6.604	51.00	8.925	0.240	6.096	12.000	53.376	0.400	10.16	0.050	1.27	8.00	SPR	CG	Z
0.36	9.144	71223	0.75	19.050	0.258	6.553	66.00	11.550	0.270	6.858	18.000	80.064	0.360	9.14	0.051	1.30	7.00	MW	CG	N
0.36	9.144	71223S	0.75	19.050	0.258	6.553	56.00	9.800	0.220	5.588	12.000	53.376	0.360	9.14	0.051	1.30	7.00	SST	CG	N
0.36	9.144	DD-100	0.75	19.050	0.252	6.401	68.00	11.900	0.210	5.334	14.000	62.272	0.410	10.41	0.054	1.37	7.50	SST	CG	N
0.36	9.144	71245	0.75	19.050	0.250	6.350	90.00	15.750	0.250	6.350	22.000	97.856	0.390	9.91	0.055	1.40	7.13	MW	CG	N
0.36	9.144	71245S	0.75	19.050	0.250	6.350	77.00	13.475	0.200	5.080	15.000	66.720	0.390	9.91	0.055	1.40	7.13	SST	CG	N
0.36	9.144	71267	0.75	19.050	0.242	6.147	121.00	21.175	0.220	5.588	27.000	120.096	0.430	10.92	0.059	1.50	7.25	MW	CG	N
0.36	9.144	71267S	0.75	19.050	0.242	6.147	103.00	18.025	0.180	4.572	18.000	80.064	0.430	10.92	0.059	1.50	7.25	SST	CG	N
0.36	9.144	M-107	0.75	19.050	0.242	6.147	117.00	20.475	0.170	4.318	20.000	88.960	0.440	11.18	0.059	1.50	7.50	SPR	CG	Z
0.36	9.144	B-85	0.78	19.812	0.298	7.569	8.30	1.453	0.370	9.398	3.100	13.789	0.220	5.59	0.031	0.79	6.00	SST	C	N
0.36	9.144	A13-17	0.78	19.812	0.292	7.417	14.00	2.450	0.440	11.176	6.100	27.133	0.200	5.08	0.034	0.86	6.00	MW	CG	N
0.36	9.144	S-1533	0.78	19.812	0.290	7.366	10.00	1.750	0.430	10.922	4.300	19.126	0.260	6.60	0.035	0.89	7.50	SST	CG	N
0.36	9.144	10447	0.78	19.812	0.258	6.553	67.00	11.725	0.190	4.826	13.000	57.824	0.410	10.41	0.051	1.30	7.00	SPR	C	Z
0.36	9.144	71033	0.81	20.574	0.308	7.823	5.60	0.980	0.490	12.446	2.800	12.454	0.130	3.30	0.026	0.66	5.13	MW	CG	N
0.36	9.144	71033S	0.81	20.574	0.308	7.823	4.80	0.840	0.390	9.906	1.900	8.451	0.130	3.30	0.026	0.66	5.13	SST	CG	N
0.36	9.144	B-73	0.81	20.574	0.308	7.823	5.30	0.928	0.350	8.890	1.900	8.451	0.160	4.06	0.026	0.66	5.00	SST	C	N
0.36	9.144	J-51	0.81	20.574	0.308	7.823	5.90	1.033	0.470	11.938	2.800	12.454	0.160	4.06	0.026	0.66	5.00	MW	C	Z
0.36	9.144	B-71	0.81	20.574	0.304	7.722	4.60	0.805	0.610	15.494	2.800	12.454	0.200	5.08	0.028	0.71	7.25	MW	CG	Z
0.36	9.144	71052	0.81	20.574	0.302	7.671	7.30	1.278	0.520	13.208	3.800	16.902	0.170	4.32	0.029	0.74	5.88	MW	CG	N
0.36	9.144	71052S	0.81	20.574	0.302	7.671	6.20	1.085	0.410	10.414	2.600	11.565	0.170	4.32	0.029	0.74	5.88	SST	CG	N
0.36	9.144	71071	0.81	20.574	0.296	7.518	11.00	1.925	0.460	11.684	5.100	22.685	0.190	4.83	0.032	0.81	5.88	MW	CG	N
0.36	9.144	71071S	0.81	20.574	0.296	7.518	9.40	1.645	0.360	9.144	3.400	15.123	0.190	4.83	0.032	0.81	5.88	SST	CG	N
0.36	9.144	A13-26	0.81	20.574	0.294	7.468	10.00	1.750	0.370	9.398	3.800	16.902	0.210	5.33	0.033	0.84	6.25	SST	CG	N
0.36	9.144	71089	0.81	20.574	0.290	7.366	14.00	2.450	0.460	11.684	6.300	28.022	0.230	5.84	0.035	0.89	6.63	MW	CG	N
0.36	9.144	71089S	0.81	20.574	0.290	7.366	12.00	2.100	0.370	9.398	4.300	19.126	0.230	5.84	0.035	0.89	6.63	SST	CG	N
0.36	9.144	H-64	0.81	20.574	0.290	7.366	12.00	2.100	0.400	10.160	4.600	20.461	0.260	6.60	0.035	0.89	7.50	SPR	CG	Z
0.36	9.144	4238	0.81	20.574	0.288	7.315	18.00	3.150	0.280	7.112	5.000	22.240	0.250	6.35	0.036	0.91	6.00	SPR	C	Z
0.36	9.144	71107	0.81	20.574	0.284	7.214	19.00	3.325	0.430	10.922	8.100	36.029	0.260	6.60	0.038	0.97	6.75	MW	CG	N
0.36	9.144	71107S	0.81	20.574	0.284	7.214	16.00	2.800	0.340	8.636	5.500	24.464	0.260	6.60	0.038	0.97	6.75	SST	CG	N
0.36	9.144	71125	0.81	20.574	0.280	7.112	22.00	3.850	0.420	10.668	9.400	41.811	0.280	7.11	0.040	1.02	7.00	MW	CG	N
0.36	9.144	71125S	0.81	20.574	0.280	7.112	19.00	3.325	0.330	8.382	6.400	28.467	0.280	7.11	0.040	1.02	7.00	SST	CG	N
0.36	9.144	71143	0.81	20.574	0.276	7.010	28.00	4.900	0.390	9.906	11.000	48.928	0.290	7.37	0.042	1.07	7.00	MW	CG	N
0.36	9.144	71143S	0.81	20.574	0.276	7.010	24.00	4.200	0.310	7.874	7.300	32.470	0.290	7.37	0.042	1.07	7.00	SST	CG	N
0.36	9.144	71161	0.81	20.574	0.270	6.858	36.00	6.300	0.360	9.144	13.000	57.824	0.320	8.13	0.045	1.14	7.13	MW	CG	N
0.36	9.144	71161S	0.81	20.574	0.270	6.858	31.00	5.425	0.290	7.366	9.000	40.032	0.320	8.13	0.045	1.14	7.13	SST	CG	N
0.36	9.144	71180	0.81	20.574	0.266	6.756	45.00	7.875	0.340	8.636	15.000	66.720	0.330	8.38	0.047	1.19	7.13	MW	CG	N
0.36	9.144	71180S	0.81	20.574	0.266	6.756	38.00	6.650	0.270	6.858	10.000	44.480	0.330	8.38	0.047	1.19	7.13	SST	CG	N
0.36	9.144	B1-15	0.81	20.574	0.266	6.756	44.00	7.700	0.250	6.350	11.000	48.928	0.340	8.64	0.047	1.19	7.25	SPR	CG	GI
0.36	9.144	71202	0.81	20.574	0.262	6.655	52.00	9.100	0.330	8.382	17.000	75.616	0.360	9.14	0.049	1.24	7.25	MW	CG	N
0.36	9.144	71202S	0.81	20.574	0.262	6.655	44.00	7.700	0.260	6.604	12.000	53.376	0.360	9.14	0.049	1.24	7.25	SST	CG	N
0.36	9.144	71224	0.81	20.574	0.258	6.553	61.00	10.675	0.300	7.620	18.000	80.064	0.380	9.65	0.051	1.30	7.50	MW	CG	N
0.36	9.144	71224S	0.81	20.574	0.258	6.553	51.00	8.925	0.240	6.096	12.000	53.376	0.380	9.65	0.051	1.30	7.50	SST	CG	N
0.36	9.144	71246	0.81	20.574	0.250	6.350	82.00	14.350	0.270	6.858	22.000	97.856	0.420	10.67	0.055	1.40	7.63	SST	CG	N
0.36	9.144	71246S	0.81	20.574	0.250	6.350	70.00	12.250	0.220	5.588	15.000	66.720	0.420	10.67	0.055	1.40	7.63	SST	CG	N
0.36	9.144	71268	0.81	20.574	0.242	6.147	111.00	19.425	0.250	6.350	27.000	120.096	0.460	11.68	0.059	1.50	7.75	MW	CG	N
0.36	9.144	71268S	0.81	20.574	0.242	6.147	94.00	16.450	0.200	5.080	18.000	80.064	0.460	11.68	0.059	1.50	7.75	SST	CG	N
0.36	9.144	MMM-48	0.84	21.336	0.304	7.722	6.10	1.068	0.570	14.478	3.500	15.568	0.200	5.08	0.028	0.71	6.00	MW	C	N
0.36	9.144	N-3	0.84	21.336	0.226	5.740	172.00	30.100	0.150	3.810	27.000	120.096	0.540	13.72	0.067	1.70	8.00	SST	CG	N
0.36	9.144	4279	0.88	22.352	0.310	7.874	4.30	0.753	0.570	14.478	2.500	11.120	0.160	4.06	0.025	0.64	5.50	MW	C	Z
0.36	9.144	S-1279	0.88	22.352	0.310	7.874	3.30	0.578	0.500	12.700	1.700	7.562	0.150	3.81	0.025	0.64	6.00	SST	CG	N
0.36	9.144	Z-55	0.88	22.352	0.310	7.874	3.70	0.648	0.440	11.176	1.700	7.562	0.160	4.06	0.025	0.64	5.50	SST	CG	N
0.36	9.144	71034	0.88	22.352	0.308	7.823	5.00	0.875	0.56											




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.36	9.144	71181	0.88	22.352	0.266	6.756	33.00	5.775	0.460	11.684	15.000	66.720	0.420	10.67	0.047	1.19	9.00	MW CG N
0.36	9.144	71181S	0.88	22.352	0.266	6.756	28.00	4.900	0.370	9.398	10.000	44.480	0.420	10.67	0.047	1.19	9.00	SST CG N
0.36	9.144	W-44	0.88	22.352	0.266	6.756	37.00	6.475	0.280	7.112	10.000	44.480	0.350	8.89	0.047	1.19	7.50	SST CG N
0.36	9.144	71203	0.88	22.352	0.262	6.655	48.00	8.400	0.360	9.144	17.000	75.616	0.380	9.65	0.049	1.24	7.75	MW CG N
0.36	9.144	71203S	0.88	22.352	0.262	6.655	41.00	7.175	0.280	7.112	12.000	53.376	0.380	9.65	0.049	1.24	7.75	SST CG N
0.36	9.144	71225	0.88	22.352	0.258	6.553	55.00	9.625	0.320	8.128	18.000	80.064	0.410	10.41	0.051	1.30	8.00	MW CG N
0.36	9.144	71225S	0.88	22.352	0.258	6.553	47.00	8.225	0.260	6.604	12.000	53.376	0.410	10.41	0.051	1.30	8.00	SST CG N
0.36	9.144	H-22	0.88	22.352	0.252	6.401	50.00	8.750	0.290	7.366	14.000	62.272	0.510	12.95	0.054	1.37	9.50	SST CG N
0.36	9.144	L-82	0.88	22.352	0.252	6.401	51.00	8.925	0.300	7.620	15.000	66.720	0.570	14.48	0.054	1.37	10.50	SPR CG Z
0.36	9.144	71247	0.88	22.352	0.250	6.350	75.00	13.125	0.300	7.620	22.000	97.856	0.450	11.43	0.055	1.40	8.13	MW CG N
0.36	9.144	71247S	0.88	22.352	0.250	6.350	64.00	11.200	0.240	6.096	15.000	66.720	0.450	11.43	0.055	1.40	8.13	SST CG N
0.36	9.144	71269	0.88	22.352	0.242	6.147	101.00	17.675	0.270	6.858	27.000	120.096	0.490	12.45	0.059	1.50	8.38	MW CG N
0.36	9.144	71269S	0.88	22.352	0.242	6.147	86.00	15.050	0.220	5.588	18.000	80.064	0.490	12.45	0.059	1.50	8.38	SST CG N
0.36	9.144	O-34	0.88	22.352	0.230	5.842	149.00	26.075	0.160	4.064	24.000	106.752	0.520	13.21	0.065	1.65	8.00	SST CG N
0.36	9.144	Y-24	0.91	23.114	0.290	7.366	9.10	1.593	0.510	12.954	4.600	20.461	0.320	8.13	0.035	0.89	9.00	SPR CG N
0.36	9.144	B2-14	0.93	23.622	0.258	6.553	6.30	1.103	0.400	10.160	2.500	11.120	0.540	13.72	0.051	1.30	9.50	MW CG Z
0.36	9.144	M-133	0.94	23.876	0.330	8.382	0.22	0.039	0.790	20.066	0.170	0.756	0.150	3.81	0.015	0.38	9.00	SST C N
0.36	9.144	JJ-82	0.94	23.876	0.316	8.026	2.20	0.385	0.780	19.812	1.700	7.562	0.150	3.81	0.022	0.56	6.00	MW C N
0.36	9.144	1929	0.94	23.876	0.310	7.874	3.90	0.683	0.630	16.002	2.500	11.120	0.170	4.32	0.025	0.64	5.88	MW C Z
0.36	9.144	71035	0.94	23.876	0.308	7.823	4.60	0.805	0.610	15.494	2.800	12.454	0.150	3.81	0.026	0.66	5.88	MW CG N
0.36	9.144	71035S	0.94	23.876	0.308	7.823	3.90	0.683	0.480	12.192	1.900	8.451	0.150	3.81	0.026	0.66	5.88	SST CG N
0.36	9.144	F-59	0.94	23.876	0.308	7.823	4.40	0.770	0.620	15.748	2.800	12.454	0.180	4.57	0.026	0.66	6.00	MW C Z
0.36	9.144	71054	0.94	23.876	0.302	7.671	6.10	1.068	0.630	16.002	3.800	16.902	0.190	4.83	0.029	0.74	6.63	MW CG N
0.36	9.144	71054S	0.94	23.876	0.302	7.671	5.20	0.910	0.490	12.446	2.600	11.565	0.190	4.83	0.029	0.74	7.00	MW CG N
0.36	9.144	A9-59	0.94	23.876	0.302	7.671	5.70	0.998	0.680	17.272	3.800	16.902	0.200	5.08	0.029	0.74	7.00	MW CG N
0.36	9.144	S-179	0.94	23.876	0.298	7.569	5.60	0.980	0.560	14.224	3.100	13.789	0.280	7.11	0.031	0.79	8.00	SST C N
0.36	9.144	71073	0.94	23.876	0.296	7.518	9.50	1.663	0.540	13.716	5.100	22.685	0.210	5.33	0.032	0.81	6.50	MW CG N
0.36	9.144	71073S	0.94	23.876	0.296	7.518	8.00	1.400	0.430	10.922	3.400	15.123	0.210	5.33	0.032	0.81	6.50	SST CG N
0.36	9.144	KK-87	0.94	23.876	0.296	7.518	7.80	1.365	0.650	16.510	5.100	22.685	0.270	6.86	0.032	0.81	7.50	MW C N
0.36	9.144	71091	0.94	23.876	0.290	7.366	12.00	2.100	0.530	13.462	6.300	28.022	0.250	6.35	0.035	0.89	7.25	MW CG N
0.36	9.144	71091S	0.94	23.876	0.290	7.366	10.00	1.750	0.420	10.668	4.300	19.126	0.250	6.35	0.035	0.89	7.25	SST CG N
0.36	9.144	71109	0.94	23.876	0.284	7.214	16.00	2.800	0.510	12.954	8.100	36.029	0.290	7.37	0.038	0.97	7.63	MW CG N
0.36	9.144	71109S	0.94	23.876	0.284	7.214	13.00	2.275	0.410	10.414	5.500	24.464	0.290	7.37	0.038	0.97	7.63	SST CG N
0.36	9.144	71127	0.94	23.876	0.280	7.112	19.00	3.325	0.490	12.446	9.400	41.811	0.320	8.13	0.040	1.02	7.88	MW CG N
0.36	9.144	71127S	0.94	23.876	0.280	7.112	16.00	2.800	0.390	9.906	6.400	28.467	0.320	8.13	0.040	1.02	7.88	SST CG N
0.36	9.144	71145	0.94	23.876	0.276	7.010	23.00	4.025	0.470	11.938	11.000	48.928	0.340	8.64	0.042	1.07	8.00	MW CG N
0.36	9.144	71145S	0.94	23.876	0.276	7.010	20.00	3.500	0.370	9.398	7.300	32.470	0.340	8.64	0.042	1.07	8.00	SST CG N
0.36	9.144	71163	0.94	23.876	0.270	6.858	30.00	5.250	0.440	11.176	13.000	57.824	0.370	9.40	0.045	1.14	8.25	MW CG N
0.36	9.144	71163S	0.94	23.876	0.270	6.858	26.00	4.550	0.350	8.890	9.000	40.032	0.370	9.40	0.045	1.14	8.25	SST CG N
0.36	9.144	F-60	0.94	23.876	0.270	6.858	32.00	5.600	0.420	10.668	13.000	57.824	0.410	10.41	0.045	1.14	8.00	MW C Z
0.36	9.144	71182	0.94	23.876	0.266	6.756	38.00	6.650	0.400	10.160	15.000	66.720	0.380	9.65	0.047	1.19	8.00	MW CG N
0.36	9.144	71182S	0.94	23.876	0.266	6.756	32.00	5.600	0.320	8.128	10.000	44.480	0.380	9.65	0.047	1.19	8.00	SST CG N
0.36	9.144	71204	0.94	23.876	0.262	6.655	44.00	7.700	0.390	9.906	17.000	75.616	0.400	10.16	0.049	1.24	8.25	MW CG N
0.36	9.144	71204S	0.94	23.876	0.262	6.655	38.00	6.650	0.310	7.874	12.000	53.376	0.400	10.16	0.049	1.24	8.25	SST CG N
0.36	9.144	71226	0.94	23.876	0.258	6.553	51.00	8.925	0.350	8.890	18.000	80.064	0.430	10.92	0.051	1.30	8.50	MW CG N
0.36	9.144	71226S	0.94	23.876	0.258	6.553	43.00	7.525	0.280	7.112	12.000	53.376	0.430	10.92	0.051	1.30	8.50	SST CG N
0.36	9.144	71248	0.94	23.876	0.250	6.350	70.00	12.250	0.320	8.128	22.000	97.856	0.470	11.94	0.055	1.40	8.63	MW CG N
0.36	9.144	71248S	0.94	23.876	0.250	6.350	59.00	10.325	0.250	6.350	15.000	66.720	0.470	11.94	0.055	1.40	8.63	SST CG N
0.36	9.144	71270	0.94	23.876	0.242	6.147	93.00	16.275	0.290	7.366	27.000	120.096	0.520	13.21	0.059	1.50	8.88	MW CG N
0.36	9.144	71270S	0.94	23.876	0.242	6.147	79.00	13.825	0.230	5.842	18.000	80.064	0.520	13.21	0.059	1.50	8.88	SST CG N
0.36	9.144	S-373	0.94	23.876	0.150	3.810	157.00	275.800	0.050	1.270	81.000	360.288	0.840	21.34	0.105	2.67	8.00	SST CG N
0.36	9.144	PP-49	0.97	24.638	0.280	7.112	10.00	1.750	0.450	11.430	4.600	20.461	0.520	13.21	0.040	1.02	13.00	SPR CG Z
0.36	9.144	I-8	0.97	24.638	0.224	5.690	178.00	31.150	0.170	4.318	29.000	128.992	0.680	17.27	0.068	1.73	9.00	SPR C N
0.36	9.144	NN-67	1.00	25.400	0.328	8.331	0.15	0.026	0.730	18.542	0.110	0.489	0.270	6.86	0.016	0.41	16.00	SST C N
0.36	9.144	EE-64	1.00	25.400	0.320	8.128	0.98	0.172	0.820	20.828	0.810	3.603	0.180	4.57	0.020	0.51	8.00	MW C N
0.36	9.144	L-56	1.00	25.400	0.318	8.077	2.10	0.368	0.750	19.050	1.600	7.117	0.140	3.56	0.021	0.53	5.50</td	




O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg. Max. Defl. Inches	Sugg. Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Fns'h
mm		mm	mm	N/mm	mm	N	mm	mm				
0.36	9.144	71146	1.00	25.400	0.276	7.010	21.00	3.675	0.510	12.954	11.000	48.928
0.36	9.144	71146S	1.00	25.400	0.276	7.010	18.00	3.150	0.410	10.414	7.300	32.470
0.36	9.144	B1-63	1.00	25.400	0.276	7.010	18.00	3.150	0.410	10.414	7.300	32.470
0.36	9.144	XX-45	1.00	25.400	0.272	6.909	27.00	4.725	0.340	8.636	9.000	40.032
0.36	9.144	10104	1.00	25.400	0.270	6.858	27.00	4.725	0.350	8.890	9.600	42.701
0.36	9.144	71164	1.00	25.400	0.270	6.858	28.00	4.900	0.470	11.938	13.000	57.824
0.36	9.144	71164S	1.00	25.400	0.270	6.858	24.00	4.200	0.380	9.652	9.000	40.032
0.36	9.144	1587	1.00	25.400	0.268	6.807	26.00	4.550	0.390	9.906	10.000	44.480
0.36	9.144	71183	1.00	25.400	0.266	6.756	35.00	6.125	0.430	10.922	15.000	66.720
0.36	9.144	71183S	1.00	25.400	0.266	6.756	30.00	5.250	0.340	8.636	10.000	44.480
0.36	9.144	71205	1.00	25.400	0.262	6.655	41.00	7.175	0.410	10.414	17.000	75.616
0.36	9.144	71205S	1.00	25.400	0.262	6.655	35.00	6.125	0.330	8.382	12.000	53.376
0.36	9.144	71227	1.00	25.400	0.258	6.553	48.00	8.400	0.380	9.652	18.000	80.064
0.36	9.144	71227S	1.00	25.400	0.258	6.553	41.00	7.175	0.300	7.620	12.000	53.376
0.36	9.144	71249	1.00	25.400	0.250	6.350	65.00	11.375	0.340	8.636	22.000	97.856
0.36	9.144	71249S	1.00	25.400	0.250	6.350	55.00	9.625	0.270	6.858	15.000	66.720
0.36	9.144	2813	1.03	26.162	0.270	6.858	27.00	4.725	0.490	12.446	13.000	57.824
0.36	9.144	S-1282	1.06	26.924	0.310	7.874	2.60	0.455	0.630	16.002	1.700	7.562
0.36	9.144	JJ-35	1.06	26.924	0.278	7.061	11.00	1.925	0.570	14.478	6.300	28.022
0.36	9.144	KK-95	1.06	26.924	0.266	6.756	29.00	5.075	0.380	9.652	11.000	48.928
0.36	9.144	12330	1.09	27.686	0.294	7.468	7.90	1.383	0.470	11.938	3.800	16.902
0.36	9.144	S-1582	1.09	27.686	0.288	7.315	8.50	1.488	0.550	13.970	4.700	20.906
0.36	9.144	S-857	1.09	27.686	0.266	6.756	19.00	3.325	0.490	12.446	9.400	41.811
0.36	9.144	10866	1.09	27.686	0.248	6.299	44.00	7.700	0.360	9.144	16.000	71.168
0.36	9.144	L-86	1.13	28.702	0.338	8.585	0.02	0.004	0.850	21.590	0.020	0.089
0.36	9.144	10162	1.13	28.702	0.310	7.874	3.00	0.525	0.820	20.828	2.500	11.120
0.36	9.144	71037	1.13	28.702	0.308	7.823	3.70	0.648	0.750	19.050	2.800	12.454
0.36	9.144	71037S	1.13	28.702	0.308	7.823	3.10	0.543	0.590	14.986	1.900	8.451
0.36	9.144	K-34	1.13	28.702	0.304	7.722	1.90	0.333	0.760	19.304	1.500	6.672
0.36	9.144	2508	1.13	28.702	0.302	7.671	4.90	0.858	0.780	19.812	3.800	16.902
0.36	9.144	71056	1.13	28.702	0.302	7.671	5.20	0.910	0.740	18.796	3.800	16.902
0.36	9.144	71056S	1.13	28.702	0.302	7.671	4.40	0.770	0.580	14.732	2.600	11.565
0.36	9.144	QO-50	1.13	28.702	0.302	7.671	4.60	0.805	0.830	21.082	3.800	16.902
0.36	9.144	10108	1.13	28.702	0.296	7.518	7.20	1.260	0.710	18.034	5.100	22.685
0.36	9.144	71075	1.13	28.702	0.296	7.518	7.50	1.313	0.680	17.272	5.100	22.685
0.36	9.144	71075S	1.13	28.702	0.296	7.518	6.40	1.120	0.540	13.716	3.400	15.123
0.36	9.144	B12-42	1.13	28.702	0.296	7.518	7.80	1.365	0.470	11.938	3.700	16.458
0.36	9.144	71093	1.13	28.702	0.290	7.366	9.80	1.715	0.650	16.510	6.300	28.022
0.36	9.144	71093S	1.13	28.702	0.290	7.366	8.30	1.453	0.520	13.208	4.300	19.126
0.36	9.144	71111	1.13	28.702	0.284	7.214	13.00	2.275	0.620	15.748	8.100	36.029
0.36	9.144	71111S	1.13	28.702	0.284	7.214	11.00	1.925	0.500	12.700	5.500	24.464
0.36	9.144	71129	1.13	28.702	0.280	7.112	16.00	2.800	0.600	15.240	9.400	41.811
0.36	9.144	71129S	1.13	28.702	0.280	7.112	13.00	2.275	0.480	12.192	6.400	28.467
0.36	9.144	10316	1.13	28.702	0.278	7.061	14.00	2.450	0.520	13.208	7.300	32.470
0.36	9.144	71147	1.13	28.702	0.276	7.010	19.00	3.325	0.580	14.732	11.000	48.928
0.36	9.144	71147S	1.13	28.702	0.276	7.010	16.00	2.800	0.460	11.684	7.300	32.470
0.36	9.144	S-1124	1.13	28.702	0.276	7.010	12.00	2.100	0.600	15.240	7.000	31.136
0.36	9.144	S-1285	1.13	28.702	0.272	6.909	19.00	3.325	0.450	11.430	8.400	37.363
0.36	9.144	71165	1.13	28.702	0.270	6.858	25.00	4.375	0.540	13.716	13.000	57.824
0.36	9.144	71165S	1.13	28.702	0.270	6.858	21.00	3.675	0.430	10.922	9.000	40.032
0.36	9.144	WV-41	1.13	28.702	0.270	6.858	21.00	3.675	0.430	10.922	9.000	40.032
0.36	9.144	71184	1.13	28.702	0.266	6.756	31.00	5.425	0.480	12.192	15.000	66.720
0.36	9.144	71184S	1.13	28.702	0.266	6.756	27.00	4.725	0.380	9.652	10.000	44.480
0.36	9.144	71206	1.13	28.702	0.262	6.655	36.00	6.300	0.470	11.938	17.000	75.616
0.36	9.144	71206S	1.13	28.702	0.262	6.655	31.00	5.425	0.370	9.938	12.000	53.376
0.36	9.144	71228	1.13	28.702	0.258	6.553	42.00	7.350	0.430	10.922	18.000	80.064
0.36	9.144	71228S	1.13	28.702	0.258	6.553	36.00	6.300	0.340	8.636	12.000	53.376
0.36	9.144	71250	1.13	28.702	0.250	6.350	57.00	9.975	0.390	9.906	22.000	97.856
0.36	9.144	71250S	1.13	28.702	0.250	6.350	48.00	8.400	0.310	7.874	15.000	66.720
0.36	9.144	71271	1.13	28.702	0.242	6.147	77.00	13.475	0.360	9.144	27.000	120.096
0.36	9.144	71271S	1.13	28.702	0.242	6.147	65.00	11.375	0.280	7.112	18.000	80.064
0.36	9.144	S-1586	1.13	28.702	0.242	6.147	64.00	11.200	0.290	7.366	18.000	80.064
0.36	9.144	3898	1.13	28.702	0.236	5.994	101.00	17.675	0.220	5.588	23.000	102.304
0.36	9.144	F-35	1.19	30.226	0.308	7.823	3.60	0.630	0.780	19.812	2.800	12.454
0.36	9.144	YY-43	1.19	30.226	0.292	7.417	5.10	0.893	0.710	18.034	3.600	16.013
0.36	9.144	3664	1.19	30.226	0.270	6.858	15.00	2.625	0.470	11.938	6.900	30.691
0.36	9.144	71038	1.25	31.750	0.308	7.823	2.80	0.490	0.670	17.018	1.900	8.451
0.36	9.144	71057	1.25	31.750	0.302	7.671	4.60	0.805	0.830	21.082	3.800	16.902
0.36	9.144	71057S	1.25	31.750	0.302	7.671	3.90	0.683	0.660	16.764	2.600	11.565
0.36	9.144	S-1272	1.25	31.750	0.302	7.671	4.50	0.788	0.570	14.478	2.600	11.565
0.36	9.144	NN-46	1.25	31.750	0.300	7.620	5.80	1.015	0.490	12.446	2.800	12.454
0.36	9.144	71076	1.25	31.750	0.296	7.518	6.80	1.190	0.750	19.050	5.100	22.685
0.36	9.144	71076S	1.25	31.750	0.296	7.518	5.80	1.015	0.590	14.986	3.400	15.123
0.36	9.144	12502	1.25	31.750	0.292	7.417	8.00	1.400	0.510	12.954	4.100	18.237
0.36	9.144	71094	1.25	31.750	0.290	7.366	8.80	1.540	0.730	18.542	6.300	28.022
0.36	9.144	71094S	1.25	31.750	0.290	7.366	7.40	1.295	0.580	14.732	4.300	19.126
0.36	9.144	S-1281	1.25	31.750	0.286	7.264	9.40	1.645	0.540	13.716	5.100	22.685
0.36	9.144	71112	1.25	31.750	0.284	7.214	10.00	1.750	0.540	13.716	5.500	24.464

Can't find what you're looking for? Request a custom quote. Email <a href="mailto:customquote




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish							
0.36	9.144	TT-38	1.25	31.750	0.284	7.214	9.10	1.593	0.640	16.256	5.800	25.798	0.490	12.45	0.038	0.97	12.00	SPR C	Z
0.36	9.144	71130	1.25	31.750	0.280	7.112	14.00	2.450	0.670	17.018	9.400	41.811	0.400	10.16	0.040	1.02	10.00	MW CG	N
0.36	9.144	71130S	1.25	31.750	0.280	7.112	12.00	2.100	0.540	13.716	6.400	28.467	0.400	10.16	0.040	1.02	10.00	SST CG	N
0.36	9.144	71148	1.25	31.750	0.276	7.010	17.00	2.975	0.640	16.256	11.000	48.928	0.430	10.92	0.042	1.07	10.10	MW CG	N
0.36	9.144	71148S	1.25	31.750	0.276	7.010	14.00	2.450	0.510	12.954	7.300	32.470	0.430	10.92	0.042	1.07	10.10	SST CG	N
0.36	9.144	71166	1.25	31.750	0.270	6.858	22.00	3.850	0.600	15.240	13.000	57.824	0.480	12.19	0.045	1.14	10.60	MW CG	N
0.36	9.144	71166S	1.25	31.750	0.270	6.858	19.00	3.325	0.480	12.192	9.000	40.032	0.480	12.19	0.045	1.14	10.60	SST CG	N
0.36	9.144	71185	1.25	31.750	0.266	6.756	28.00	4.900	0.540	13.716	15.000	66.720	0.480	12.19	0.047	1.19	10.30	MW CG	N
0.36	9.144	71185S	1.25	31.750	0.266	6.756	24.00	4.200	0.430	10.922	10.000	44.480	0.480	12.19	0.047	1.19	10.30	SST CG	N
0.36	9.144	71207	1.25	31.750	0.262	6.655	32.00	5.600	0.530	13.462	17.000	75.616	0.510	12.95	0.049	1.24	10.50	MW CG	N
0.36	9.144	71207S	1.25	31.750	0.262	6.655	27.00	4.725	0.420	10.668	12.000	53.376	0.510	12.95	0.049	1.24	10.50	SST CG	N
0.36	9.144	71229	1.25	31.750	0.258	6.553	37.00	6.475	0.480	12.192	18.000	80.064	0.550	13.97	0.051	1.30	10.90	MW CG	N
0.36	9.144	71229S	1.25	31.750	0.258	6.553	32.00	5.600	0.380	9.652	12.000	53.376	0.550	13.97	0.051	1.30	10.90	SST CG	N
0.36	9.144	71251	1.25	31.750	0.250	6.350	51.00	8.925	0.440	11.176	22.000	97.856	0.610	15.49	0.055	1.40	11.10	MW CG	N
0.36	9.144	71251S	1.25	31.750	0.250	6.350	43.00	7.525	0.350	8.890	15.000	66.720	0.610	15.49	0.055	1.40	11.10	SST CG	N
0.36	9.144	71272	1.25	31.750	0.242	6.147	68.00	11.900	0.400	10.160	27.000	120.096	0.670	17.02	0.059	1.50	11.40	MW CG	N
0.36	9.144	71272S	1.25	31.750	0.242	6.147	58.00	10.150	0.320	8.128	18.000	80.064	0.670	17.02	0.059	1.50	11.40	SST CG	N
0.36	9.144	10450	1.28	32.512	0.302	7.671	2.60	0.455	0.880	22.352	2.300	10.230	0.410	10.41	0.029	0.74	13.00	MW C	Z
0.36	9.144	HH-85	1.31	33.274	0.328	8.331	0.18	0.032	1.100	27.940	0.200	0.890	0.220	5.59	0.016	0.41	13.00	SST C	N
0.36	9.144	S-1270	1.31	33.274	0.278	7.061	10.00	1.750	0.680	17.272	6.800	30.246	0.530	13.46	0.041	1.04	13.00	SST CG	N
0.36	9.144	MM-83	1.31	33.274	0.276	7.010	17.00	2.975	0.460	11.684	7.800	34.694	0.470	11.94	0.042	1.07	10.30	SPR C	GI
0.36	9.144	3265	1.31	33.274	0.274	6.960	18.00	3.150	0.460	11.684	8.400	37.363	0.450	11.43	0.043	1.09	10.50	SPR CG	Z
0.36	9.144	F-62	1.31	33.274	0.270	6.858	23.00	4.025	0.420	10.668	9.600	42.701	0.510	12.95	0.045	1.14	11.00	SPR C	Z
0.36	9.144	12503	1.31	33.274	0.268	6.807	23.00	4.025	0.410	10.414	9.600	42.701	0.500	12.70	0.046	1.17	9.75	SST C	N
0.36	9.144	VW-53	1.31	33.274	0.248	6.299	56.00	9.800	0.300	7.620	17.000	75.616	0.620	15.75	0.056	1.42	11.00	SPR CG	Z
0.36	9.144	S-3185	1.33	33.782	0.280	7.112	9.00	1.575	0.710	18.034	6.400	28.467	0.520	13.21	0.040	1.02	13.00	SST CG	N
0.36	9.144	2871	1.34	34.036	0.284	7.214	10.00	1.750	0.800	20.320	8.100	36.029	0.420	10.67	0.038	0.97	11.00	MW CG	Z
0.36	9.144	71040	1.38	35.052	0.308	7.823	3.00	0.525	0.920	23.368	2.800	12.454	0.200	5.08	0.026	0.66	7.88	MW CG	N
0.36	9.144	71040S	1.38	35.052	0.308	7.823	2.60	0.455	0.730	18.542	1.900	8.451	0.200	5.08	0.026	0.66	7.88	SST CG	N
0.36	9.144	71058	1.38	35.052	0.302	7.671	4.20	0.735	0.920	23.368	3.800	16.902	0.250	6.35	0.029	0.74	8.75	MW CG	N
0.36	9.144	71058S	1.38	35.052	0.302	7.671	3.50	0.613	0.730	18.542	2.600	11.565	0.250	6.35	0.029	0.74	8.75	SST CG	N
0.36	9.144	71077	1.38	35.052	0.296	7.518	6.30	1.103	0.820	20.828	5.100	22.685	0.280	7.11	0.032	0.81	8.88	MW CG	N
0.36	9.144	71077S	1.38	35.052	0.296	7.518	5.30	0.928	0.650	16.510	3.400	15.123	0.280	7.11	0.032	0.81	8.88	SST CG	N
0.36	9.144	A13-31	1.38	35.052	0.292	7.417	7.50	1.313	0.590	14.986	4.400	19.571	0.320	8.13	0.034	0.86	9.50	SPR CG	GI
0.36	9.144	71095	1.38	35.052	0.290	7.366	7.90	1.383	0.810	20.574	6.300	28.022	0.350	8.89	0.035	0.89	10.00	MW CG	N
0.36	9.144	71095S	1.38	35.052	0.290	7.366	6.70	1.173	0.640	16.256	4.300	19.126	0.350	8.89	0.035	0.89	10.00	SST CG	N
0.36	9.144	3930	1.38	35.052	0.284	7.214	13.00	2.275	0.450	11.430	5.800	25.798	0.380	9.65	0.038	0.97	9.00	SPR C	Z
0.36	9.144	71113	1.38	35.052	0.284	7.214	10.00	1.750	0.790	20.066	8.100	36.029	0.410	10.41	0.038	0.97	10.80	MW CG	N
0.36	9.144	71113S	1.38	35.052	0.284	7.214	8.70	1.523	0.630	16.002	5.500	24.464	0.410	10.41	0.038	0.97	10.80	SST CG	N
0.36	9.144	71131	1.38	35.052	0.280	7.112	13.00	2.275	0.750	19.050	9.400	41.811	0.440	11.18	0.040	1.02	11.00	MW CG	N
0.36	9.144	71131S	1.38	35.052	0.280	7.112	11.00	1.925	0.600	15.240	6.400	28.467	0.440	11.18	0.040	1.02	11.00	SST CG	N
0.36	9.144	71149	1.38	35.052	0.276	7.010	16.00	2.800	0.690	17.526	11.000	48.928	0.450	11.43	0.042	1.07	10.80	MW CG	N
0.36	9.144	71149S	1.38	35.052	0.276	7.010	13.00	2.275	0.550	13.970	7.300	32.470	0.450	11.43	0.042	1.07	10.80	SST CG	N
0.36	9.144	3601	1.38	35.052	0.270	6.858	19.00	3.325	0.500	12.700	9.600	42.701	0.590	14.99	0.045	1.14	12.00	SPR C	Z
0.36	9.144	71167	1.38	35.052	0.270	6.858	20.00	3.500	0.670	17.018	13.000	57.824	0.520	13.21	0.045	1.14	11.50	MW CG	N
0.36	9.144	71167S	1.38	35.052	0.270	6.858	17.00	2.975	0.530	13.462	9.000	40.032	0.520	13.21	0.045	1.14	11.50	SST CG	N
0.36	9.144	71186	1.38	35.052	0.266	6.756	25.00	4.375	0.610	15.494	15.000	66.720	0.530	13.46	0.047	1.19	11.30	MW CG	N
0.36	9.144	71186S	1.38	35.052	0.266	6.756	21.00	3.675	0.480	12.192	10.000	44.480	0.530	13.46	0.047	1.19	11.30	SST CG	N
0.36	9.144	71208	1.38	35.052	0.262	6.655	29.00	5.075	0.590	14.986	17.000	75.616	0.560	14.22	0.049	1.24	11.50	MW CG	N
0.36	9.144	71208S	1.38	35.052	0.262	6.655	25.00	4.375	0.470	11.938	12.000	53.376	0.560	14.22	0.049	1.24	11.50	SST CG	N
0.36	9.144	71230	1.38	35.052	0.258	6.553	34.00	5.950	0.530	13.462	18.000	80.064	0.610	15.49	0.051	1.30	11.90	SST CG	N
0.36	9.144	71230S	1.38	35.052	0.258	6.553	28.00	4.900	0.430	10.922	12.000	53.376	0.610	15.49	0.051	1.30	11.90	SST CG	N
0.36	9.144	W-67	1.38	35.052	0.258	6.553	27.00	4.725	0.480	12.192	13.000	57.824	0.740	18.80	0.051	1.30	14.50	SPR CG	GI
0.36	9.144	71252	1.38	35.052	0.250	6.350	45.00	7.875	0.490	12.446	22.000	97.856	0.670	17.02	0.055	1.40	12.30	MW CG	N
0.36	9.144	71252S	1.38	35.052	0.25														




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
0.36	9.144	71114S	1.50	38.100	0.284	7.214	7.90	1.383	0.690	17.526	5.500	24.464	0.440	11.18	0.038	0.97	11.60	SST	CG	N
0.36	9.144	A13-4	1.50	38.100	0.284	7.214	9.80	1.715	0.600	15.240	5.800	25.798	0.430	10.92	0.038	0.97	11.30	SPR	CG	GI
0.36	9.144	71132	1.50	38.100	0.280	7.112	12.00	2.100	0.810	20.574	9.400	41.811	0.470	11.94	0.040	1.02	11.60	MW	CG	N
0.36	9.144	71132S	1.50	38.100	0.280	7.112	9.90	1.733	0.650	16.510	6.400	28.467	0.470	11.94	0.040	1.02	11.60	SST	CG	N
0.36	9.144	GG-85	1.50	38.100	0.280	7.112	9.00	1.575	0.710	18.034	6.400	28.467	0.520	13.21	0.040	1.02	13.00	SST	CG	N
0.36	9.144	71150	1.50	38.100	0.276	7.010	15.00	2.625	0.750	19.050	11.000	48.928	0.490	12.45	0.042	1.07	11.60	MW	CG	N
0.36	9.144	71150S	1.50	38.100	0.276	7.010	12.00	2.100	0.600	15.240	7.300	32.470	0.490	12.45	0.042	1.07	11.60	SST	CG	N
0.36	9.144	S-1308	1.50	38.100	0.272	6.909	14.00	2.450	0.620	15.748	8.400	37.363	0.570	14.48	0.044	1.12	13.00	SST	CG	N
0.36	9.144	71168	1.50	38.100	0.270	6.858	18.00	3.150	0.740	18.796	13.000	57.824	0.560	14.22	0.045	1.14	12.50	MW	CG	N
0.36	9.144	71168S	1.50	38.100	0.270	6.858	15.00	2.625	0.590	14.986	9.000	40.032	0.560	14.22	0.045	1.14	12.50	SST	CG	N
0.36	9.144	2615	1.50	38.100	0.268	6.807	20.00	3.500	0.710	18.034	14.000	62.272	0.580	14.73	0.046	1.17	12.50	MW	CG	Z
0.36	9.144	71187	1.50	38.100	0.266	6.756	23.00	4.025	0.660	16.764	15.000	66.720	0.560	14.22	0.047	1.19	12.00	MW	CG	N
0.36	9.144	71187S	1.50	38.100	0.266	6.756	19.00	3.325	0.530	13.462	10.000	44.480	0.560	14.22	0.047	1.19	12.00	SST	CG	N
0.36	9.144	71209	1.50	38.100	0.262	6.655	27.00	4.725	0.640	16.256	17.000	75.616	0.610	15.49	0.049	1.24	12.40	MW	CG	N
0.36	9.144	71209S	1.50	38.100	0.262	6.655	23.00	4.025	0.510	12.954	12.000	53.376	0.610	15.49	0.049	1.24	12.40	SST	CG	N
0.36	9.144	71231	1.50	38.100	0.258	6.553	31.00	5.425	0.580	14.732	18.000	80.064	0.650	16.51	0.051	1.30	12.80	MW	CG	N
0.36	9.144	71231S	1.50	38.100	0.258	6.553	26.00	4.550	0.460	11.684	12.000	53.376	0.650	16.51	0.051	1.30	12.80	SST	CG	N
0.36	9.144	71253	1.50	38.100	0.250	6.350	42.00	7.350	0.540	13.716	22.000	97.856	0.720	18.29	0.055	1.40	13.10	MW	CG	N
0.36	9.144	71253S	1.50	38.100	0.250	6.350	35.00	6.125	0.430	10.922	15.000	66.720	0.720	18.29	0.055	1.40	13.10	SST	CG	N
0.36	9.144	71274	1.50	38.100	0.242	6.147	56.00	9.800	0.490	12.446	27.000	120.096	0.800	20.32	0.059	1.50	13.50	MW	CG	N
0.36	9.144	71274S	1.50	38.100	0.242	6.147	47.00	8.225	0.390	9.906	18.000	80.064	0.800	20.32	0.059	1.50	13.50	SST	CG	N
0.36	9.144	JJ-16	1.50	38.100	0.240	6.096	103.00	18.025	0.190	4.826	19.000	84.512	0.540	13.72	0.060	1.52	8.00	SST	C	N
0.36	9.144	S-1653	1.53	38.862	0.298	7.569	4.00	0.700	0.770	19.558	3.100	13.789	0.350	8.89	0.031	0.79	10.30	SST	C	N
0.36	9.144	F-63	1.53	38.862	0.270	6.858	17.00	2.975	0.550	13.970	9.600	42.701	0.630	16.00	0.045	1.14	13.00	SPR	C	Z
0.36	9.144	S-850	1.63	41.402	0.298	7.569	3.50	0.613	0.880	22.352	3.100	13.789	0.380	9.65	0.031	0.79	11.30	SST	C	N
0.36	9.144	A13-41	1.63	41.402	0.248	6.299	51.00	8.925	0.330	8.382	17.000	75.616	0.670	17.02	0.056	1.42	12.00	SPR	CG	N
0.36	9.144	RR-8	1.69	42.926	0.298	7.569	2.30	0.403	1.200	30.480	2.800	12.454	0.500	12.70	0.031	0.79	16.00	SST	C	N
0.36	9.144	B8-56	1.69	42.926	0.268	6.807	14.00	2.450	0.730	18.542	10.000	44.480	0.780	19.81	0.046	1.17	17.00	SPR	CG	N
0.36	9.144	W-31	1.69	42.926	0.268	6.807	12.00	2.100	0.800	20.320	9.600	42.701	0.810	20.57	0.046	1.17	17.50	SST	CG	N
0.36	9.144	10245	1.69	42.926	0.266	6.756	29.00	5.075	0.380	9.652	11.000	48.928	0.520	13.21	0.047	1.19	10.00	SPR	C	Z
0.36	9.144	10623	1.75	44.450	0.324	8.230	0.38	0.067	1.600	40.640	0.580	2.580	0.200	5.08	0.018	0.46	11.00	SST	CG	N
0.36	9.144	FF-96	1.75	44.450	0.310	7.874	1.40	0.245	1.400	35.560	2.000	8.896	0.340	8.64	0.025	0.64	12.50	MW	C	Z
0.36	9.144	71042	1.75	44.450	0.308	7.823	2.40	0.420	1.200	30.480	2.800	12.454	0.240	6.10	0.026	0.66	9.38	MW	CG	N
0.36	9.144	71042S	1.75	44.450	0.308	7.823	2.00	0.350	0.910	23.114	1.900	8.451	0.240	6.10	0.026	0.66	9.38	SST	CG	N
0.36	9.144	71060	1.75	44.450	0.302	7.671	3.30	0.578	1.200	30.480	3.800	16.902	0.300	7.62	0.029	0.74	10.50	MW	CG	N
0.36	9.144	71060S	1.75	44.450	0.302	7.671	2.80	0.490	0.920	23.368	2.600	11.565	0.300	7.62	0.029	0.74	10.50	SST	CG	N
0.36	9.144	71079	1.75	44.450	0.296	7.518	4.60	0.805	1.100	27.940	5.100	22.685	0.360	9.14	0.032	0.81	11.30	MW	CG	N
0.36	9.144	71079S	1.75	44.450	0.296	7.518	3.90	0.683	0.880	22.352	3.400	15.123	0.360	9.14	0.032	0.81	11.30	SST	CG	N
0.36	9.144	71097	1.75	44.450	0.290	7.366	6.20	1.085	1.000	25.400	6.300	28.022	0.420	10.67	0.035	0.89	12.10	MW	CG	N
0.36	9.144	71097S	1.75	44.450	0.290	7.366	5.30	0.928	0.810	20.574	4.300	19.126	0.420	10.67	0.035	0.89	12.10	SST	CG	N
0.36	9.144	71115	1.75	44.450	0.284	7.214	8.30	1.453	0.980	24.892	8.100	36.029	0.490	12.45	0.038	0.97	12.90	MW	CG	N
0.36	9.144	71115S	1.75	44.450	0.284	7.214	7.00	1.225	0.780	19.812	5.500	24.464	0.490	12.45	0.038	0.97	12.90	SST	CG	N
0.36	9.144	71133	1.75	44.450	0.280	7.112	9.80	1.715	0.960	24.384	9.400	41.811	0.540	13.72	0.040	1.02	13.50	MW	CG	N
0.36	9.144	71133S	1.75	44.450	0.280	7.112	8.30	1.453	0.760	19.304	6.400	28.467	0.540	13.72	0.040	1.02	13.50	SST	CG	N
0.36	9.144	71151	1.75	44.450	0.276	7.010	12.00	2.100	0.910	23.114	11.000	48.928	0.580	14.73	0.042	1.07	13.80	MW	CG	N
0.36	9.144	71151S	1.75	44.450	0.276	7.010	10.00	1.750	0.730	18.542	7.300	32.470	0.580	14.73	0.042	1.07	13.80	SST	CG	N
0.36	9.144	71169	1.75	44.450	0.270	6.858	15.00	2.625	0.860	21.844	13.000	57.824	0.640	16.26	0.045	1.14	14.30	MW	CG	N
0.36	9.144	71169S	1.75	44.450	0.270	6.858	13.00	2.275	0.690	17.526	9.000	40.032	0.640	16.26	0.045	1.14	14.30	SST	CG	N
0.36	9.144	HH-89	1.75	44.450	0.268	6.807	12.00	2.100	0.810	20.574	9.700	43.146	0.940	23.88	0.046	1.17	19.50	SPR	C	Z
0.36	9.144	71188	1.75	44.450	0.266	6.756	19.00	3.325	0.780	19.812	15.000	66.720	0.650	16.51	0.047	1.19	13.90	MW	CG	N
0.36	9.144	71188S	1.75	44.450	0.266	6.756	16.00	2.800	0.620	15.748	10.000	44.480	0.650	16.51	0.047	1.19	13.90	SST	CG	N
0.36	9.144	K-45	1.75	44.450	0.264	6.706	16.00	2.800	0.730	18.542	12.000	53.376	0.910	23.11	0.048	1.22	18.00	SPR	C	GI
0.36	9.144	71210	1.75	44.450	0.262	6.655	22.00	3.850	0.760	19.304	17.000	75.616	0.700	17.78	0.049	1.24	14.30	MW	CG	N




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h						
0.36	9.144	71134S	2.00	50.800	0.280	7.112	7.30	1.278	0.870	22.098	6.400	28.467	0.600	15.24	0.040	1.02	15.00	SST CG N
0.36	9.144	HH-14	2.00	50.800	0.280	7.112	5.30	0.928	1.200	30.480	6.100	27.133	0.840	21.34	0.040	1.02	21.00	SST CG N
0.36	9.144	71152	2.00	50.800	0.276	7.010	10.00	1.750	1.000	25.400	11.000	48.928	0.650	16.51	0.042	1.07	15.40	MW CG N
0.36	9.144	71152S	2.00	50.800	0.276	7.010	8.80	1.540	0.830	21.082	7.300	32.470	0.650	16.51	0.042	1.07	15.40	SST CG N
0.36	9.144	71170	2.00	50.800	0.270	6.858	13.00	2.275	1.000	25.400	13.000	57.824	0.730	18.54	0.045	1.14	16.30	MW CG N
0.36	9.144	71170S	2.00	50.800	0.270	6.858	11.00	1.925	0.800	20.320	9.000	40.032	0.730	18.54	0.045	1.14	16.30	SST CG N
0.36	9.144	71189	2.00	50.800	0.266	6.756	17.00	2.975	0.900	22.860	15.000	66.720	0.730	18.54	0.047	1.19	15.60	MW CG N
0.36	9.144	71189S	2.00	50.800	0.266	6.756	14.00	2.450	0.710	18.034	10.000	44.480	0.730	18.54	0.047	1.19	15.60	SST CG N
0.36	9.144	H-40	2.00	50.800	0.266	6.756	12.00	2.100	0.860	21.844	10.000	44.480	0.890	22.61	0.047	1.19	19.00	SST CG N
0.36	9.144	71211	2.00	50.800	0.262	6.655	20.00	3.500	0.870	22.098	17.000	75.616	0.790	20.07	0.049	1.24	16.10	MW CG N
0.36	9.144	71211S	2.00	50.800	0.262	6.655	17.00	2.975	0.690	17.526	12.000	53.376	0.790	20.07	0.049	1.24	16.10	SST CG N
0.36	9.144	71233	2.00	50.800	0.258	6.553	23.00	4.025	0.790	20.066	18.000	80.064	0.850	21.59	0.051	1.30	16.60	MW CG N
0.36	9.144	71233S	2.00	50.800	0.258	6.553	19.00	3.325	0.630	16.002	12.000	53.376	0.850	21.59	0.051	1.30	16.60	SST CG N
0.36	9.144	71255	2.00	50.800	0.250	6.350	31.00	5.425	0.730	18.542	22.000	97.856	0.950	24.13	0.055	1.40	17.30	MW CG N
0.36	9.144	71255S	2.00	50.800	0.250	6.350	26.00	4.550	0.580	14.732	15.000	66.720	0.950	24.13	0.055	1.40	17.30	SST CG N
0.36	9.144	71276	2.00	50.800	0.242	6.147	41.00	7.175	0.670	17.018	27.000	120.096	1.050	26.67	0.059	1.50	17.80	MW CG N
0.36	9.144	71276S	2.00	50.800	0.242	6.147	35.00	6.125	0.530	13.462	18.000	80.064	1.050	26.67	0.059	1.50	17.80	SST CG N
0.36	9.144	B14-50	2.03	51.562	0.244	6.198	43.00	7.525	0.440	11.176	19.000	84.512	0.990	25.15	0.058	1.47	16.00	SPR C Z
0.36	9.144	10205	2.06	52.324	0.278	7.061	11.00	1.925	0.690	17.526	7.300	32.470	0.570	14.48	0.041	1.04	14.00	SPR CG Z
0.36	9.144	71044	2.25	57.150	0.308	7.823	1.90	0.333	1.500	38.100	2.800	12.454	0.300	7.62	0.026	0.66	11.40	MW CG N
0.36	9.144	71044S	2.25	57.150	0.308	7.823	1.60	0.280	1.200	30.480	1.900	8.451	0.300	7.62	0.026	0.66	11.40	SST CG N
0.36	9.144	71063	2.25	57.150	0.302	7.671	2.50	0.438	1.500	38.100	3.800	16.902	0.380	9.65	0.029	0.74	13.30	MW CG N
0.36	9.144	71063S	2.25	57.150	0.302	7.671	2.10	0.368	1.200	30.480	2.600	11.565	0.380	9.65	0.029	0.74	13.30	SST CG N
0.36	9.144	S-3048	2.25	57.150	0.302	7.671	2.70	0.473	0.940	23.876	2.600	11.565	0.350	8.89	0.029	0.74	11.00	SST C N
0.36	9.144	10112	2.25	57.150	0.298	7.569	3.40	0.595	1.400	35.560	4.700	20.906	0.400	10.16	0.031	0.79	13.00	MW CG Z
0.36	9.144	71081	2.25	57.150	0.296	7.518	3.70	0.648	1.400	35.560	5.100	22.685	0.430	10.92	0.032	0.81	13.50	MW CG N
0.36	9.144	71081S	2.25	57.150	0.296	7.518	3.10	0.543	1.100	27.940	3.400	15.123	0.430	10.92	0.032	0.81	13.50	SST CG N
0.36	9.144	71099	2.25	57.150	0.290	7.366	4.70	0.823	1.400	35.560	6.300	28.022	0.540	13.72	0.035	0.89	15.40	MW CG N
0.36	9.144	71099S	2.25	57.150	0.290	7.366	4.00	0.700	1.100	27.940	4.300	19.126	0.540	13.72	0.035	0.89	15.40	SST CG N
0.36	9.144	71117	2.25	57.150	0.284	7.214	6.50	1.138	1.300	33.020	8.100	36.029	0.600	15.24	0.038	0.97	15.90	MW CG N
0.36	9.144	71117S	2.25	57.150	0.284	7.214	5.50	0.963	1.000	25.400	5.500	24.464	0.600	15.24	0.038	0.97	15.90	SST CG N
0.36	9.144	71135	2.25	57.150	0.280	7.112	7.60	1.330	1.200	30.480	9.400	41.811	0.680	17.27	0.040	1.02	16.90	MW CG N
0.36	9.144	71135S	2.25	57.150	0.280	7.112	6.40	1.120	0.990	25.146	6.400	28.467	0.680	17.27	0.040	1.02	16.90	SST CG N
0.36	9.144	71153	2.25	57.150	0.276	7.010	9.10	1.593	1.200	30.480	11.000	48.928	0.730	18.54	0.042	1.07	17.40	MW CG N
0.36	9.144	71153S	2.25	57.150	0.276	7.010	7.70	1.348	0.950	24.130	7.300	32.470	0.730	18.54	0.042	1.07	17.40	SST CG N
0.36	9.144	71171	2.25	57.150	0.270	6.858	12.00	2.100	1.100	27.940	13.000	57.824	0.810	20.57	0.045	1.14	18.00	MW CG N
0.36	9.144	71171S	2.25	57.150	0.284	7.214	5.50	0.963	1.000	25.400	5.500	24.464	0.600	15.24	0.038	0.97	15.90	SST CG N
0.36	9.144	71212S	2.25	57.150	0.262	6.655	15.00	2.625	0.790	20.066	12.000	53.376	0.880	22.35	0.049	1.24	18.00	SST CG N
0.36	9.144	71234	2.25	57.150	0.258	6.553	20.00	3.500	0.900	22.860	18.000	80.064	0.950	24.13	0.051	1.30	18.60	MW CG N
0.36	9.144	71234S	2.25	57.150	0.258	6.553	17.00	2.975	0.720	18.288	12.000	53.376	0.950	24.13	0.051	1.30	18.60	SST CG N
0.36	9.144	71256	2.25	57.150	0.250	6.350	27.00	4.725	0.830	21.082	22.000	97.856	1.060	26.92	0.055	1.40	19.30	MW CG N
0.36	9.144	71256S	2.25	57.150	0.250	6.350	23.00	4.025	0.660	16.764	15.000	66.720	1.060	26.92	0.055	1.40	19.30	SST CG N
0.36	9.144	71277	2.25	57.150	0.242	6.147	36.00	6.300	0.760	19.304	27.000	120.096	1.170	29.72	0.059	1.50	19.80	MW CG N
0.36	9.144	71277S	2.25	57.150	0.242	6.147	31.00	5.425	0.600	15.240	18.000	80.064	1.170	29.72	0.059	1.50	19.80	SST CG N
0.36	9.144	U-61A	2.28	57.912	0.272	6.909	10.00	1.750	0.890	22.606	9.000	40.032	0.880	22.35	0.044	1.12	19.00	SPR C Z
0.36	9.144	12229	2.34	59.436	0.304	7.722	1.70	0.298	1.900	48.260	3.300	14.678	0.450	11.43	0.028	0.71	16.00	MW CG GI
0.36	9.144	S-1589	2.34	59.436	0.284	7.214	3.70	0.648	1.400	35.560	5.200	23.130	0.910	23.11	0.038	0.97	24.00	SST CG N
0.36	9.144	71082	2.50	63.500	0.296	7.518	3.30	0.578	1.500	38.100	5.100	22.685	0.480	12.19	0.032	0.81	14.90	MW CG N
0.36	9.144	71082S	2.50	63.500	0.296	7.518	2.80	0.490	1.200	30.480	3.400	15.123	0.480	12.19	0.032	0.81	14.90	SST CG N
0.36	9.144	71100	2.50	63.500	0.290	7.366	4.20	0.735	1.500	38.100	6.300	28.022	0.600	15.24	0.035	0.89	17.00	MW CG N
0.36	9.144	71100S	2.50	63.500	0.290	7.366	3.60	0.630	1.200	30.480	4.300	19.126	0.600	15.24	0.035	0.89	17.00	SST CG N
0.36	9.144	71118	2.50	63.500	0.284	7.214	5.80	1.015	1.400	35.560	8.100	36.029	0.670	17.02	0.038	0.97	17.60	MW CG N
0.36	9.144	71118S	2.50	63.500	0.284	7.214	4.90	0.858	1.100	27.940	5.500	24.464	0.670	17.02	0.038	0.97	17.60	SST CG N
0.36	9.144	71136	2.50	63.500	0.280	7.112	6.70	1.173	1.400	35.560	9.400	41.811	0.750	19.05	0.040	1.02	18.80	MW CG N
0.36	9.144	71136S	2.50	63.500	0.280	7.112	5.70	0.998	1.100	27.940	6.400	28.467	0.750	19.05	0.040	1.02	18.80	SST CG N
0.36	9.144	71154	2.50	63.500	0.276													




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends E F n sh
0.36	9.144	71192	2.75	69.850	0.266	6.756	12.00	2.100	1.200	30.480	15.000
0.36	9.144	71192S	2.75	69.850	0.266	6.756	10.00	1.750	0.990	25.146	10.000
0.36	9.144	71214	2.75	69.850	0.262	6.655	14.00	2.450	1.200	30.480	17.000
0.36	9.144	71214S	2.75	69.850	0.262	6.655	12.00	2.100	0.970	24.638	12.000
0.36	9.144	71236	2.75	69.850	0.258	6.553	16.00	2.800	1.100	27.940	18.000
0.36	9.144	71236S	2.75	69.850	0.258	6.553	14.00	2.450	0.880	22.352	12.000
0.36	9.144	71258	2.75	69.850	0.250	6.350	22.00	3.850	1.000	25.400	22.000
0.36	9.144	71258S	2.75	69.850	0.250	6.350	19.00	3.325	0.810	20.574	15.000
0.36	9.144	71279	2.75	69.850	0.242	6.147	29.00	5.075	0.940	23.876	27.000
0.36	9.144	71279S	2.75	69.850	0.242	6.147	25.00	4.375	0.750	19.050	18.000
0.36	9.144	4318	2.81	71.374	0.272	6.909	7.40	1.295	1.200	30.480	9.000
0.36	9.144	10642	2.88	73.152	0.270	6.858	7.60	1.330	1.300	33.020	9.600
0.36	9.144	LL-32	2.88	73.152	0.240	6.096	25.00	4.375	0.780	19.812	19.000
0.36	9.144	12154	3.00	76.200	0.274	6.960	5.80	1.015	1.500	38.100	8.400
0.36	9.144	71193	3.00	76.200	0.266	6.756	11.00	1.925	1.400	35.560	15.000
0.36	9.144	71193S	3.00	76.200	0.266	6.756	9.40	1.645	1.100	27.940	10.000
0.36	9.144	71215	3.00	76.200	0.262	6.655	13.00	2.275	1.300	33.020	17.000
0.36	9.144	71215S	3.00	76.200	0.262	6.655	11.00	1.925	1.100	27.940	12.000
0.36	9.144	71237	3.00	76.200	0.258	6.553	15.00	2.625	1.200	30.480	18.000
0.36	9.144	71237S	3.00	76.200	0.258	6.553	13.00	2.275	0.960	24.384	12.000
0.36	9.144	71259	3.00	76.200	0.250	6.350	20.00	3.500	1.100	27.940	22.000
0.36	9.144	71259S	3.00	76.200	0.250	6.350	17.00	2.975	0.890	22.606	15.000
0.36	9.144	71280	3.00	76.200	0.242	6.147	27.00	4.725	1.000	25.400	27.000
0.36	9.144	71280S	3.00	76.200	0.242	6.147	23.00	4.025	0.820	20.828	18.000
0.36	9.144	12805	3.25	82.550	0.290	7.366	2.00	0.350	2.000	50.800	4.000
0.36	9.144	71194	3.25	82.550	0.266	6.756	10.00	1.750	1.500	38.100	15.000
0.36	9.144	71194S	3.25	82.550	0.266	6.756	8.60	1.505	1.200	30.480	10.000
0.36	9.144	71216	3.25	82.550	0.262	6.655	12.00	2.100	1.400	35.560	17.000
0.36	9.144	71216S	3.25	82.550	0.262	6.655	10.00	1.750	1.100	27.940	12.000
0.36	9.144	71238	3.25	82.550	0.258	6.553	14.00	2.450	1.300	33.020	18.000
0.36	9.144	71238S	3.25	82.550	0.258	6.553	12.00	2.100	1.000	25.400	12.000
0.36	9.144	71260	3.25	82.550	0.250	6.350	19.00	3.325	1.200	30.480	22.000
0.36	9.144	71260S	3.25	82.550	0.250	6.350	16.00	2.800	0.960	24.384	15.000
0.36	9.144	71281	3.25	82.550	0.242	6.147	25.00	4.375	1.100	27.940	27.000
0.36	9.144	71281S	3.25	82.550	0.242	6.147	21.00	3.675	0.890	22.606	18.000
0.36	9.144	10850	3.50	88.900	0.280	7.112	5.00	0.875	1.300	33.020	6.400
0.36	9.144	71195	3.50	88.900	0.266	6.756	9.40	1.645	1.600	40.640	15.000
0.36	9.144	71195S	3.50	88.900	0.266	6.756	8.60	1.505	1.300	33.020	10.000
0.36	9.144	71217	3.50	88.900	0.262	6.655	11.00	1.925	1.600	40.640	17.000
0.36	9.144	71217S	3.50	88.900	0.262	6.655	9.30	1.628	1.200	30.480	12.000
0.36	9.144	71239	3.50	88.900	0.258	6.553	13.00	2.275	1.400	35.560	18.000
0.36	9.144	71239S	3.50	88.900	0.258	6.553	11.00	1.925	1.100	27.940	12.000
0.36	9.144	71261	3.50	88.900	0.250	6.350	17.00	2.975	1.300	33.020	22.000
0.36	9.144	71261S	3.50	88.900	0.250	6.350	15.00	2.625	1.200	25.400	15.000
0.36	9.144	71282	3.50	88.900	0.242	6.147	23.00	4.025	1.200	30.480	27.000
0.36	9.144	71282S	3.50	88.900	0.242	6.147	19.00	3.325	0.960	24.384	18.000
0.36	9.144	UU-54	3.75	95.250	0.290	7.366	2.00	0.350	2.300	58.420	4.600
0.36	9.144	2907	4.00	101.600	0.180	4.572	148.00	25.900	0.400	10.160	59.000
0.36	9.144	L-33	4.13	104.902	0.266	6.756	6.10	1.068	1.800	45.720	11.000
0.36	9.144	11422	4.38	111.252	0.300	7.620	0.91	0.159	3.200	81.280	2.900
0.36	9.144	11515	4.81	122.174	0.292	7.417	1.70	0.298	2.500	63.500	4.400
0.36	9.144	3053	4.88	123.952	0.266	6.756	5.40	0.945	2.000	50.800	11.000
0.36	9.144	12265	5.25	133.350	0.236	5.994	32.00	5.600	0.700	17.780	23.000
0.36	9.144	12117	6.25	158.750	0.282	7.163	2.10	0.368	3.000	76.200	6.300
0.36	9.144	2623	6.50	165.100	0.284	7.214	2.00	0.350	2.900	73.660	5.800
0.36	9.144	12202	7.63	193.802	0.264	6.706	3.80	0.665	3.100	78.740	12.000
0.362	9.195	12745	1.19	30.226	0.290	7.366	7.70	1.348	0.760	19.304	5.800
0.364	9.246	12694	2.25	57.150	0.264	6.706	18.00	3.150	0.920	23.368	17.000
0.37	9.398	B4-61	0.88	22.352	0.314	7.976	5.50	0.963	0.410	10.414	2.300
0.375	9.525	BB-89	0.19	4.826	0.335	8.509	8.90	1.558	0.100	2.540	0.860
0.375	9.525	4104	0.25	6.350	0.291	7.391	121.00	21.175	0.060	1.524	7.500
0.375	9.525	3289	0.28	7.112	0.299	7.595	39.00	6.825	0.090	2.286	3.600
0.375	9.525	10183	0.31	7.874	0.347	8.814	0.78	0.137	0.250	6.350	0.190
0.375	9.525	S-1315	0.38	9.652	0.315	8.001	25.00	4.375	0.110	2.794	2.700
0.375	9.525	K-20	0.38	9.652	0.305	7.747	27.00	4.725	0.160	4.064	4.400
0.375	9.525	K-69	0.38	9.652	0.293	7.442	32.00	5.600	0.170	4.318	5.400
0.375	9.525	A-32	0.38	9.652	0.285	7.239	66.00	11.550	0.140	3.556	9.200
0.375	9.525	A10-38	0.38	9.652	0.273	6.934	127.00	22.225	0.090	2.286	12.000
0.375	9.525	S-166	0.38	9.652	0.265	6.731	116.00	20.300	0.100	2.540	12.000
0.375	9.525	10634	0.41	10.414	0.315	8.001	20.00	3.500	0.140	3.556	2.700
0.375	9.525	B2-47	0.42	10.668	0.279	7.087	87.00	15.225	0.130	3.302	11.000
0.375	9.525	H-4	0.44	11.176	0.291	7.391	42.00	7.350	0.170	4.318	7.100
0.375	9.525	10132	0.44	11.176	0.285	7.239	66.00	11.550	0.140	3.556	9.200
0.375	9.525	V-38	0.44	11.176	0.285	7.239	82.00	14.350	0.110	2.794	9.200
0.375	9.525	B4-17	0.44	11.176	0.279	7.087	87.00	15.225	0.130	3.302	11.000
0.375	9.525	3666	0.47	11.938	0.327	8.306	3.30	0.578	0.340	8.636	1.100
0.375	9.525	AA-66	0.47	11.938	0.305	7.747	16.00	2.800	0.250	6.350	4.100
0.375	9.525	F-33	0.47	11.938	0.285	7.239	94.00	16.450	0.100	2.540	9.200
0.375	9.525	TT-36	0.47	11.938	0.283	7.188	52.00	9.100	0.190	4.826	9.800
0.375	9.525	A-20	0.47	11.938	0.275	6.985	58.00	10.150	0.170	4.318	9.700

Can't find what you're looking for? Request a custom quote. Email customquote@centuryspring.com




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h								
0.375	9.525	2583	0.50	12.700	0.335	8.509	2.10	0.368	0.390	9.906	0.800	3.558	0.110	2.79	0.020	0.51	4.50	MW	C	Z
0.375	9.525	N-36	0.50	12.700	0.335	8.509	1.80	0.315	0.390	9.906	0.700	3.114	0.110	2.79	0.020	0.51	4.50	SST	C	N
0.375	9.525	PP-71	0.50	12.700	0.335	8.509	0.82	0.144	0.320	8.128	0.260	1.156	0.190	4.83	0.020	0.51	8.25	MW	C	BO
0.375	9.525	NN-38	0.50	12.700	0.333	8.458	0.90	0.158	0.290	7.366	0.260	1.156	0.210	5.33	0.021	0.53	9.00	MW	C	N
0.375	9.525	B12-33	0.50	12.700	0.331	8.407	1.90	0.333	0.370	9.398	0.700	3.114	0.130	3.30	0.022	0.56	6.00	MW	CG	N
0.375	9.525	4254	0.50	12.700	0.329	8.357	1.70	0.298	0.300	7.620	0.510	2.268	0.200	5.08	0.023	0.58	7.50	MW	C	Z
0.375	9.525	K-5	0.50	12.700	0.323	8.204	2.60	0.455	0.270	6.858	0.690	3.069	0.230	5.84	0.026	0.66	8.00	MW	C	Z
0.375	9.525	CC-46	0.50	12.700	0.311	7.899	8.10	1.418	0.280	7.112	2.200	9.786	0.220	5.59	0.032	0.81	6.00	SST	C	N
0.375	9.525	S-1184	0.50	12.700	0.303	7.696	20.00	3.500	0.230	5.842	4.500	20.016	0.170	4.32	0.036	0.91	4.75	SST	CG	N
0.375	9.525	BB-6	0.50	12.700	0.301	7.645	17.00	2.975	0.260	6.604	4.500	20.016	0.240	6.10	0.037	0.94	5.50	SST	C	N
0.375	9.525	10153	0.50	12.700	0.293	7.442	31.00	5.425	0.230	5.842	7.000	31.136	0.230	5.84	0.041	1.04	5.50	SPR	CG	Z
0.375	9.525	S-837	0.50	12.700	0.293	7.442	32.00	5.600	0.210	5.334	6.600	29.357	0.210	5.33	0.041	1.04	5.00	SST	CG	N
0.375	9.525	938	0.50	12.700	0.281	7.137	99.00	17.325	0.110	2.794	10.000	44.480	0.240	6.10	0.047	1.19	4.00	HD	C	Z
0.375	9.525	K-96	0.50	12.700	0.281	7.137	57.00	9.975	0.180	4.572	10.000	44.480	0.260	6.60	0.047	1.19	5.50	SPR	CG	N
0.375	9.525	FF-18	0.50	12.700	0.275	6.985	105.00	18.375	0.110	2.794	12.000	53.376	0.230	5.84	0.050	1.27	4.50	SPR	CG	N
0.375	9.525	MM-77	0.50	12.700	0.275	6.985	65.00	11.375	0.170	4.318	11.000	48.928	0.280	7.11	0.050	1.27	5.50	SST	CG	N
0.375	9.525	PP-4	0.50	12.700	0.265	6.731	100.00	17.500	0.150	3.810	15.000	66.720	0.330	8.38	0.055	1.40	6.00	SPR	CG	Z
0.375	9.525	S-312	0.50	12.700	0.265	6.731	112.00	19.600	0.130	3.302	15.000	66.720	0.280	7.11	0.055	1.40	5.00	SST	CG	N
0.375	9.525	939	0.50	12.700	0.251	6.375	231.00	40.425	0.090	2.286	22.000	97.856	0.310	7.87	0.062	1.57	5.00	HD	CG	Z
0.375	9.525	S-1477	0.50	12.700	0.251	6.375	201.00	35.175	0.104	2.642	21.000	93.408	0.319	8.10	0.063	1.59	5.10	SST	CG	N
0.375	9.525	S-1119	0.50	12.700	0.247	6.274	349.00	61.075	0.060	1.524	23.000	102.304	0.320	8.13	0.064	1.63	4.00	SST	C	N
0.375	9.525	3618	0.50	12.700	0.209	5.309	1096.00	191.800	0.060	1.524	66.000	293.568	0.370	9.40	0.083	2.11	4.50	MW	CG	Z
0.375	9.525	S-867	0.53	13.462	0.323	8.204	5.40	0.945	0.330	8.382	1.800	8.006	0.120	3.05	0.026	0.66	4.50	SST	CG	N
0.375	9.525	10813	0.53	13.462	0.321	8.153	6.00	1.050	0.370	9.398	2.200	9.786	0.160	4.06	0.027	0.69	5.00	MW	C	Z
0.375	9.525	S-3086	0.53	13.462	0.311	7.899	17.00	2.975	0.200	5.080	3.300	14.678	0.130	3.30	0.032	0.81	4.00	SST	CG	N
0.375	9.525	Z-58	0.53	13.462	0.303	7.696	21.00	3.675	0.230	5.842	4.800	21.350	0.180	4.57	0.036	0.91	5.00	SPR	CG	Z
0.375	9.525	F-28	0.53	13.462	0.285	7.239	55.00	9.625	0.170	4.318	9.200	40.922	0.270	6.86	0.045	1.14	5.00	HD	C	Z
0.375	9.525	UU-62	0.53	13.462	0.281	7.137	66.00	11.550	0.160	4.064	10.000	44.480	0.280	7.11	0.047	1.19	5.00	SPR	C	Z
0.375	9.525	10136	0.53	13.462	0.215	5.461	765.00	133.875	0.060	1.524	43.000	191.264	0.400	10.16	0.080	2.03	5.00	SPR	CG	N
0.375	9.525	10613	0.53	13.462	0.215	5.461	706.00	123.550	0.060	1.524	43.000	191.264	0.420	10.67	0.080	2.03	5.25	SPR	CG	N
0.375	9.525	BB-37	0.56	14.224	0.345	8.763	0.45	0.079	0.470	11.938	0.210	0.934	0.090	2.29	0.015	0.38	5.00	SST	C	N
0.375	9.525	F-45	0.56	14.224	0.323	8.204	7.70	1.348	0.340	8.636	2.700	12.010	0.130	3.30	0.026	0.66	4.00	MW	C	Z
0.375	9.525	10581	0.56	14.224	0.317	8.052	7.60	1.330	0.410	10.414	3.100	13.789	0.150	3.81	0.029	0.74	5.25	MW	CG	Z
0.375	9.525	2654	0.56	14.224	0.299	7.595	26.00	4.550	0.220	5.588	5.600	24.909	0.190	4.83	0.038	0.97	5.00	SPR	CG	Z
0.375	9.525	1891	0.56	14.224	0.285	7.239	41.00	7.175	0.230	5.842	9.200	40.922	0.270	6.86	0.045	1.14	6.00	SPR	CG	Z
0.375	9.525	O-75	0.56	14.224	0.283	7.188	45.00	7.875	0.220	5.588	9.800	43.590	0.280	7.11	0.046	1.17	6.00	SPR	CG	N
0.375	9.525	J-56	0.56	14.224	0.281	7.137	50.00	8.750	0.190	4.826	9.800	43.590	0.310	7.87	0.047	1.19	5.50	SST	C	N
0.375	9.525	I-33	0.56	14.224	0.277	7.036	80.00	14.000	0.150	3.810	12.000	53.376	0.290	7.37	0.049	1.24	5.00	SPR	C	N
0.375	9.525	B15-17	0.56	14.224	0.211	5.359	646.00	113.050	0.070	1.778	45.000	200.160	0.490	12.45	0.082	2.08	6.00	SPR	CG	N
0.375	9.525	W-15	0.59	14.986	0.323	8.204	2.40	0.420	0.350	8.890	0.820	3.647	0.250	6.35	0.026	0.66	8.50	MW	C	N
0.375	9.525	S-908	0.59	14.986	0.301	7.645	15.00	2.625	0.310	7.874	4.900	21.795	0.220	5.59	0.037	0.94	6.00	SST	CG	N
0.375	9.525	B14-7	0.59	14.986	0.289	7.341	38.00	6.650	0.210	5.334	8.100	36.029	0.240	6.10	0.043	1.09	5.50	SPR	CG	N
0.375	9.525	B12-48	0.63	16.002	0.347	8.814	0.59	0.103	0.560	14.224	0.330	1.468	0.070	1.78	0.014	0.36	4.00	MW	C	N
0.375	9.525	00-63	0.63	16.002	0.335	8.509	1.50	0.263	0.250	12.954	0.750	3.336	0.120	3.05	0.020	0.51	5.00	SST	CG	N
0.375	9.525	HH-80	0.63	16.002	0.331	8.407	1.70	0.298	0.460	11.684	0.780	3.469	0.170	4.32	0.022	0.56	6.50	MW	C	N
0.375	9.525	O-90	0.63	16.002	0.327	8.306	1.60	0.280	0.410	10.414	0.650	2.891	0.220	5.59	0.024	0.61	8.00	SST	C	N
0.375	9.525	12433	0.63	16.002	0.323	8.204	5.20	0.910	0.470	11.938	2.400	10.675	0.160	4.06	0.026	0.66	5.00	MW	CG	GI
0.375	9.525	G-95	0.63	16.002	0.323	8.204	2.40	0.420	0.400	10.160	0.960	4.270	0.220	5.59	0.026	0.66	8.50	MW	CG	N
0.375	9.525	10305	0.63	16.002	0.317	8.052	3.50	0.613	0.340	8.636	1.200	5.338	0.290	7.37	0.029	0.74	9.00	MW	C	Z
0.375	9.525	Z-8	0.63	16.002	0.315	8.001	4.70	0.823	0.390	9.906	1.800	8.006	0.240	6.10	0.030	0.76	8.00	MW	CG	Z
0.375	9.525	2603	0.63	16.002	0.303	7.696	15.00	2.625	0.370	9.398	5.800	25.798	0.250	6.35	0.036	0.91	6.00	MW	C	Z
0.375	9.525	KK-38	0.63	16.002	0.295	7.493	17.00	2.975	0.340	8.636	5.500	24.464	0.290	7.37	0.040	1.02	7.25	SST	CG	N
0.375	9.525	BB-54	0.63	16.002	0.289	7.341	34.00	5.950	0.240	6.096	8.100	36.029	0.260	6.60	0.043	1.09	6.00	SPR	CG	Z
0.375	9.525	516	0.63	16.002	0.281	7.137	46.00	8.050	0.230	5.842	10.000	44.480	0.340							




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
0.375	9.525	A-51	0.75	19.050	0.319	8.103	3.70	0.648	0.550	13.970	2.000	8.896	0.200	5.08	0.028	0.71	7.00	SST	CG	N
0.375	9.525	526	0.75	19.050	0.313	7.950	7.70	1.348	0.420	10.668	3.200	14.234	0.220	5.59	0.031	0.79	6.25	HD	C	Z
0.375	9.525	A-70	0.75	19.050	0.297	7.544	17.00	2.975	0.340	8.636	5.700	25.354	0.250	6.35	0.039	0.99	6.50	SST	CG	C
0.375	9.525	B2-70	0.75	19.050	0.295	7.493	24.00	4.200	0.370	9.398	9.000	40.032	0.280	7.11	0.040	1.02	6.00	MW	C	N
0.375	9.525	I-12	0.75	19.050	0.295	7.493	24.00	4.200	0.270	6.858	6.500	28.912	0.240	6.10	0.040	1.02	6.00	SPR	CG	GI
0.375	9.525	291	0.75	19.050	0.293	7.442	23.00	4.025	0.310	7.874	7.000	31.136	0.320	8.13	0.041	1.04	6.75	HD	C	Z
0.375	9.525	12234	0.75	19.050	0.291	7.391	24.00	4.200	0.310	7.874	7.500	33.360	0.340	8.64	0.042	1.07	7.00	SPR	C	Z
0.375	9.525	S-740	0.75	19.050	0.291	7.391	22.00	3.850	0.320	8.128	7.100	31.581	0.330	8.38	0.042	1.07	6.75	SST	C	N
0.375	9.525	B15-61	0.75	19.050	0.285	7.239	30.00	5.250	0.310	7.874	9.200	40.922	0.380	9.65	0.045	1.14	7.50	SPR	C	N
0.375	9.525	F-37	0.75	19.050	0.283	7.188	36.00	6.300	0.270	6.858	9.800	43.590	0.370	9.40	0.046	1.17	7.00	HD	C	Z
0.375	9.525	2557	0.75	19.050	0.279	7.087	35.00	6.125	0.350	8.890	12.000	53.376	0.400	10.16	0.048	1.22	8.25	MW	CG	Z
0.375	9.525	4358	0.75	19.050	0.275	6.985	65.00	11.375	0.180	4.572	12.000	53.376	0.350	8.89	0.050	1.27	6.00	SPR	C	Z
0.375	9.525	367	0.75	19.050	0.267	6.782	67.00	11.725	0.220	5.588	15.000	66.720	0.460	11.68	0.054	1.37	7.50	HD	C	Z
0.375	9.525	KK-39	0.75	19.050	0.247	6.274	146.00	25.550	0.160	4.064	24.000	106.752	0.480	12.19	0.064	1.63	7.50	SPR	CG	Z
0.375	9.525	10905	0.78	19.812	0.343	8.712	0.33	0.058	0.630	16.002	0.210	0.934	0.150	3.81	0.016	0.41	8.25	MW	C	N
0.375	9.525	S-342	0.78	19.812	0.325	8.255	1.70	0.298	0.560	14.224	0.920	4.092	0.230	5.84	0.025	0.64	9.00	SST	CG	N
0.375	9.525	A10-11	0.78	19.812	0.285	7.239	24.00	4.200	0.360	9.144	8.600	38.253	0.410	10.41	0.045	1.14	8.00	SST	CG	N
0.375	9.525	L-45	0.78	19.812	0.267	6.782	67.00	11.725	0.220	5.588	15.000	66.720	0.410	10.41	0.054	1.37	7.50	SPR	CG	N
0.375	9.525	940	0.81	20.574	0.329	8.357	2.60	0.455	0.660	16.764	1.700	7.562	0.150	3.81	0.023	0.58	5.50	MW	C	Z
0.375	9.525	F-7	0.81	20.574	0.323	8.204	4.80	0.840	0.560	14.224	2.700	12.010	0.160	4.06	0.026	0.66	5.25	MW	C	Z
0.375	9.525	10243	0.81	20.574	0.305	7.747	9.10	1.593	0.480	12.192	4.400	19.571	0.280	7.11	0.035	0.89	8.00	SPR	CG	Z
0.375	9.525	S-1455	0.81	20.574	0.301	7.645	7.80	1.365	0.450	11.430	3.500	15.568	0.360	9.14	0.037	0.94	9.75	SST	CG	N
0.375	9.525	I-64	0.81	20.574	0.297	7.544	13.00	2.275	0.470	11.938	6.100	27.133	0.340	8.64	0.039	0.99	8.75	SPR	CG	Z
0.375	9.525	QO-15	0.84	21.336	0.289	7.341	27.00	4.725	0.300	7.620	8.100	36.029	0.340	8.64	0.043	1.09	7.00	SPR	C	Z
0.375	9.525	F-52	0.84	21.336	0.285	7.239	30.00	5.250	0.310	7.874	9.200	40.922	0.380	9.65	0.045	1.14	7.50	SPR	C	Z
0.375	9.525	JJ-81	0.88	22.352	0.335	8.509	0.89	0.156	0.720	18.288	0.640	2.847	0.160	4.06	0.020	0.51	7.00	SST	C	N
0.375	9.525	363	0.88	22.352	0.329	8.357	2.60	0.455	0.730	18.542	1.900	8.451	0.150	3.81	0.023	0.58	5.50	MW	C	Z
0.375	9.525	11288	0.88	22.352	0.325	8.255	2.70	0.473	0.580	14.732	1.600	7.117	0.180	4.57	0.025	0.64	6.25	SST	C	N
0.375	9.525	3093	0.88	22.352	0.319	8.103	3.60	0.630	0.630	16.002	2.300	10.230	0.250	6.35	0.028	0.71	7.75	MW	C	Z
0.375	9.525	S-46	0.88	22.352	0.317	8.052	1.40	0.245	0.350	8.890	0.500	2.224	0.520	13.21	0.029	0.74	17.00	SST	CG	N
0.375	9.525	DD-90	0.88	22.352	0.315	8.001	3.90	0.683	0.590	14.986	2.300	10.230	0.290	7.37	0.030	0.76	8.50	SST	C	N
0.375	9.525	I-89	0.88	22.352	0.315	8.001	4.10	0.718	0.610	15.494	2.500	11.120	0.270	6.86	0.030	0.76	9.00	MW	CG	Z
0.375	9.525	2571	0.88	22.352	0.313	7.950	3.30	0.578	0.470	11.938	1.500	6.672	0.400	10.16	0.031	0.79	12.00	MW	C	Z
0.375	9.525	S-736	0.88	22.352	0.311	7.899	7.20	1.260	0.460	11.684	3.300	14.678	0.240	6.10	0.032	0.81	6.50	SST	C	N
0.375	9.525	N-95	0.88	22.352	0.305	7.747	4.80	0.840	0.460	11.684	2.200	9.786	0.420	10.67	0.035	0.89	12.00	SST	CG	N
0.375	9.525	UU-33	0.88	22.352	0.297	7.544	16.00	2.800	0.380	9.652	6.100	27.133	0.330	8.38	0.039	0.99	7.50	SPR	C	Z
0.375	9.525	S-741	0.88	22.352	0.291	7.391	19.00	3.325	0.370	9.398	7.100	31.581	0.360	9.14	0.042	1.07	7.50	SST	C	N
0.375	9.525	3616	0.88	22.352	0.281	7.137	33.00	5.775	0.320	8.128	10.000	44.480	0.420	10.67	0.047	1.19	8.00	HD	C	Z
0.375	9.525	B14-59	0.88	22.352	0.271	6.883	69.00	12.075	0.190	4.826	13.000	57.824	0.390	9.91	0.052	1.32	6.50	SPR	C	Z
0.375	9.525	Y-25	0.88	22.352	0.255	6.477	86.00	15.050	0.220	5.588	19.000	84.512	0.480	12.19	0.060	1.52	8.00	SST	CG	N
0.375	9.525	885	0.88	22.352	0.215	5.461	328.00	57.400	0.130	3.302	43.000	191.264	0.720	18.29	0.080	2.03	9.00	HD	CG	Z
0.375	9.525	S-492	0.91	23.114	0.305	7.747	6.00	1.050	0.560	14.224	3.300	14.678	0.350	8.89	0.035	0.89	10.00	SST	CG	N
0.375	9.525	B3-38	0.91	23.114	0.269	6.833	52.00	9.100	0.270	6.858	14.000	62.272	0.450	11.43	0.053	1.35	8.50	SPR	C	N
0.375	9.525	K-42	0.94	23.876	0.335	8.509	1.10	0.193	0.370	19.558	0.860	3.825	0.140	3.56	0.020	0.51	6.00	SST	C	N
0.375	9.525	10263	0.94	23.876	0.325	8.255	4.80	0.840	0.500	12.700	2.400	10.675	0.140	3.56	0.025	0.64	4.75	MW	C	Z
0.375	9.525	A11-58	0.94	23.876	0.315	8.001	5.40	0.945	0.730	18.542	4.000	17.792	0.210	5.33	0.030	0.76	7.00	MW	CG	N
0.375	9.525	F-38	0.94	23.876	0.285	7.239	23.00	4.025	0.390	9.906	9.200	40.922	0.450	11.43	0.045	1.14	9.00	SPR	C	Z
0.375	9.525	O-45	0.94	23.876	0.281	7.137	33.00	5.775	0.320	8.128	10.000	44.480	0.420	10.67	0.047	1.19	8.00	SPR	C	Z
0.375	9.525	12310	0.94	23.876	0.279	7.087	36.00	6.300	0.310	7.874	11.000	48.928	0.430	10.92	0.048	1.22	8.00	SPR	C	Z
0.375	9.525	S-1008	0.94	23.876	0.273	6.934	38.00	6.650	0.310	7.874	12.000	53.376	0.450	11.43	0.051	1.30	8.75	SST	CG	N
0.375	9.525	2928	0.94	23.876	0.251	6.375	77.00	13.475	0.260	6.604	20.000	88.960	0.680	17.27	0.062	1.57	11.00	HD	CG	GI
0.375	9.525	B11-36	0.97	24.638	0.319	8.103	2.10	0.368	0.630	16.002	1.300	5.782	0.340	8.64	0.028	0.71	12.00	MW	CG	N
0.375	9.525	A-78	1.00	25.400	0.335	8.509	0.48	0.084	0.760	19.304	0.360	1.601	0.250	6.35	0.020	0.51	11.30	SST	C	N
0.375	9.525	H-7	1.00	25.400	0.327	8.306	1.20	0.210	0.740	18.796	0.880	3.914	0.2							




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h						
0.375	9.525	S-913	1.09	27.686	0.249	6.325	84.00	14.700	0.249	6.325	21.000	93.408	0.590	14.99	0.063	1.59	9.40	SST CG N
0.375	9.525	S-3039	1.13	28.702	0.327	8.306	0.66	0.116	0.710	18.034	0.470	2.091	0.420	10.67	0.024	0.61	16.50	SST C N
0.375	9.525	B11-22	1.13	28.702	0.315	8.001	3.50	0.613	0.800	20.320	2.800	12.454	0.330	8.38	0.030	0.76	10.00	MW C N
0.375	9.525	U-3	1.13	28.702	0.309	7.849	5.30	0.928	0.730	18.542	3.900	17.347	0.360	9.14	0.033	0.84	10.00	SPR C Z
0.375	9.525	11755	1.13	28.702	0.307	7.798	7.50	1.313	0.570	14.478	4.200	18.682	0.290	7.37	0.034	0.86	8.50	SPR CG Z
0.375	9.525	519	1.13	28.702	0.293	7.442	13.00	2.275	0.530	13.462	7.000	31.136	0.460	11.68	0.041	1.04	10.30	HD C Z
0.375	9.525	F-44	1.13	28.702	0.285	7.239	21.00	3.675	0.450	11.430	9.200	40.922	0.500	12.70	0.045	1.14	10.00	SPR C Z
0.375	9.525	10078	1.13	28.702	0.279	7.087	26.00	4.550	0.430	10.922	11.000	48.928	0.500	12.70	0.048	1.22	10.50	SPR CG Z
0.375	9.525	FF-90	1.13	28.702	0.265	6.731	44.00	7.700	0.330	8.382	15.000	66.720	0.550	13.97	0.055	1.40	10.00	SST CG N
0.375	9.525	N-111	1.13	28.702	0.251	6.375	75.00	13.125	0.278	7.061	21.000	93.408	0.646	16.41	0.063	1.59	10.30	SST CG N
0.375	9.525	501	1.13	28.702	0.231	5.867	154.00	26.950	0.210	5.334	32.000	142.336	0.860	21.84	0.072	1.83	11.00	HD C Z
0.375	9.525	S-851	1.16	29.464	0.319	8.103	1.30	0.228	0.700	17.780	0.900	4.003	0.460	11.68	0.028	0.71	16.30	SST CG N
0.375	9.525	2661	1.19	30.226	0.293	7.442	11.00	1.925	0.640	16.256	7.000	31.136	0.490	12.45	0.041	1.04	12.00	SPR CG GI
0.375	9.525	II-55	1.19	30.226	0.277	7.036	19.00	3.325	0.550	13.970	10.000	44.480	0.640	16.26	0.049	1.24	13.00	SST CG N
0.375	9.525	GG-84	1.19	30.226	0.265	6.731	38.00	6.650	0.400	10.160	15.000	66.720	0.690	17.53	0.055	1.40	12.50	SPR CG Z
0.375	9.525	B10-37	1.22	30.988	0.293	7.442	12.00	2.100	0.580	14.732	7.000	31.136	0.490	12.45	0.041	1.04	11.00	SPR C N
0.375	9.525	S-1146	1.25	31.750	0.325	8.255	1.90	0.333	0.840	21.336	1.600	7.117	0.230	5.84	0.025	0.64	8.00	SST CG N
0.375	9.525	TT-61	1.25	31.750	0.319	8.103	1.90	0.333	0.860	21.844	1.600	7.117	0.390	9.91	0.028	0.71	13.00	MW C Z
0.375	9.525	S-738	1.25	31.750	0.311	7.899	4.80	0.840	0.690	17.526	3.300	14.678	0.310	7.87	0.032	0.81	8.75	SST C N
0.375	9.525	10017	1.25	31.750	0.307	7.798	4.80	0.840	0.810	20.574	3.900	17.347	0.440	11.18	0.034	0.86	12.00	SPR C Z
0.375	9.525	3677	1.25	31.750	0.293	7.442	14.00	2.450	0.520	13.208	7.000	31.136	0.450	11.43	0.041	1.04	10.00	SPR C N
0.375	9.525	S-743	1.25	31.750	0.291	7.391	12.00	2.100	0.570	14.478	7.100	31.581	0.480	12.19	0.042	1.07	10.50	SST C N
0.375	9.525	3847	1.25	31.750	0.281	7.137	23.00	4.025	0.450	11.430	10.000	44.480	0.540	13.72	0.047	1.19	10.50	SPR C Z
0.375	9.525	10797	1.25	31.750	0.279	7.087	22.00	3.850	0.450	11.430	10.000	44.480	0.486	12.34	0.048	1.21	10.00	SST CG N
0.375	9.525	GG-11	1.25	31.750	0.275	6.985	28.00	4.900	0.410	10.414	12.000	53.376	0.560	14.22	0.050	1.27	11.30	SPR CG Z
0.375	9.525	LL-61	1.28	32.512	0.275	6.985	19.00	3.325	0.570	14.478	11.000	48.928	0.700	17.78	0.050	1.27	14.00	SST CG N
0.375	9.525	V-60	1.31	33.274	0.305	7.747	4.30	0.753	0.860	21.844	3.700	16.458	0.460	11.68	0.035	0.89	13.00	SST CG N
0.375	9.525	10032	1.31	33.274	0.285	7.239	15.00	2.625	0.620	15.748	9.200	40.922	0.630	16.00	0.045	1.14	13.00	SPR C Z
0.375	9.525	12400	1.38	35.052	0.341	8.661	0.22	0.039	1.100	27.940	0.240	1.068	0.260	6.60	0.017	0.43	14.00	MW C N
0.375	9.525	UU-68	1.38	35.052	0.327	8.306	0.96	0.168	1.100	27.940	1.000	4.448	0.310	7.87	0.024	0.61	12.00	SST C N
0.375	9.525	3507	1.38	35.052	0.315	8.001	3.70	0.648	1.100	27.940	3.900	17.347	0.320	8.13	0.030	0.76	9.75	MW C Z
0.375	9.525	S-207	1.38	35.052	0.293	7.442	8.60	1.505	0.760	19.304	6.600	29.357	0.570	14.48	0.041	1.04	13.00	SST C N
0.375	9.525	S-282	1.38	35.052	0.257	6.528	51.00	8.925	0.350	8.890	18.000	80.064	0.680	17.27	0.059	1.50	11.50	SST CG N
0.375	9.525	H-44	1.38	35.052	0.247	6.274	68.00	11.900	0.350	8.890	24.000	106.752	0.880	22.35	0.064	1.63	13.80	SPR CG GI
0.375	9.525	S-1067	1.38	35.052	0.231	5.867	142.00	24.850	0.210	5.334	30.000	133.440	0.760	19.30	0.072	1.83	10.50	SST CG N
0.375	9.525	12712	1.39	35.306	0.307	7.798	6.10	1.068	0.970	24.638	5.900	26.243	0.370	9.40	0.034	0.86	10.00	MW C N
0.375	9.525	10579	1.41	35.814	0.335	8.509	0.51	0.089	1.100	27.940	0.590	2.624	0.260	6.60	0.020	0.51	12.00	MW C Z
0.375	9.525	3936	1.41	35.814	0.313	7.950	5.40	0.945	0.820	20.828	4.500	20.016	0.280	7.11	0.031	0.79	8.00	MW C Z
0.375	9.525	N-125	1.44	36.576	0.315	8.001	3.10	0.543	0.880	22.352	2.700	12.010	0.330	8.38	0.030	0.76	10.00	SST C N
0.375	9.525	FF-94	1.44	36.576	0.281	7.137	13.00	2.275	0.640	16.256	8.500	37.808	0.800	20.32	0.047	1.19	17.00	SPR CG GI
0.375	9.525	4183	1.50	38.100	0.341	8.661	0.19	0.033	1.200	30.480	0.230	1.023	0.280	7.11	0.017	0.43	15.80	MW C N
0.375	9.525	111	1.50	38.100	0.325	8.255	1.70	0.298	1.200	30.480	2.200	9.786	0.260	6.60	0.025	0.64	9.50	MW C Z
0.375	9.525	S-1421	1.50	38.100	0.321	8.153	3.00	0.525	0.660	16.764	2.000	8.896	0.220	5.59	0.027	0.69	7.25	SST CG N
0.375	9.525	30	1.50	38.100	0.319	8.103	2.60	0.455	1.200	30.480	3.200	14.234	0.310	7.87	0.028	0.71	10.00	MW C Z
0.375	9.525	S-14	1.50	38.100	0.317	8.052	2.10	0.368	1.100	27.940	2.400	10.675	0.380	9.65	0.029	0.74	12.00	SST CG N
0.375	9.525	2551	1.50	38.100	0.315	8.001	2.60	0.455	1.100	27.940	2.800	12.454	0.420	10.67	0.030	0.76	13.00	MW C Z
0.375	9.525	S-739	1.50	38.100	0.311	7.899	3.90	0.683	0.840	21.336	3.300	14.678	0.360	9.14	0.032	0.81	10.30	SST CG N
0.375	9.525	3820	1.50	38.100	0.299	7.595	8.20	1.435	0.680	17.272	5.600	24.909	0.440	11.18	0.038	0.97	11.50	SPR CG Z
0.375	9.525	G-73	1.50	38.100	0.293	7.442	9.70	1.698	0.680	17.272	6.600	29.357	0.490	12.45	0.041	1.04	12.00	SST CG N
0.375	9.525	S-744	1.50	38.100	0.291	7.391	10.00	1.750	0.690	17.526	7.100	31.581	0.560	14.22	0.042	1.07	12.30	SST C N
0.375	9.525	S-1216	1.50	38.100	0.287	7.290	16.00	2.800	0.500	12.700	8.100	36.029	0.480	12.19	0.044	1.12	10.00	SST C N
0.375	9.525	2554	1.50	38.100	0.285	7.239	16.00	2.800	0.590	14.986	9.200	40.922	0.610	15.49	0.045	1.14	12.50	SPR CG Z
0.375	9.525	J-50	1.50	38.100	0.285	7.239	12.00	2.100	0.730	18.542	8.600	38.253	0.630	16.00	0.045	1.14	14.00	SST CG N
0.375	9.525	10001	1.50	38.100	0.281	7.137	20.00	3.500	0.730	18.542	15.000	66.720	0.610	15.49	0.047	1.19	12.00	MW C Z
0.375	9.525	MM-42	1.50	38.100	0.275	6.985	24.00	4.200	0.450	11.430	11.000	48.928	0.580	14.73	0.050	1.27	11.50	SST CG N
0.375	9.525	3712	1.50	38.100	0.263	6.680	33.00	5.775	0.490									




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
0.375	9.525	S-442	2.00	50.800	0.311	7.899	2.00	0.350	1.400	35.560	2.900	12.899	0.580	14.73	0.032	0.81	18.00	SST	CG	N
0.375	9.525	09-91	2.00	50.800	0.295	7.493	5.80	1.015	1.100	27.940	6.500	28.912	0.760	19.30	0.040	1.02	19.00	SPR	CG	N
0.375	9.525	384	2.00	50.800	0.293	7.442	7.10	1.243	0.980	24.892	7.000	31.136	0.750	19.05	0.041	1.04	17.30	HD	C	Z
0.375	9.525	3605	2.00	50.800	0.285	7.239	11.00	1.925	1.200	30.480	13.000	57.824	0.810	20.57	0.045	1.14	17.00	MW	C	Z
0.375	9.525	17	2.00	50.800	0.281	7.137	12.00	2.100	0.880	22.352	10.000	44.480	0.930	23.62	0.047	1.19	18.80	HD	C	Z
0.375	9.525	12759	2.00	50.800	0.281	7.137	14.00	2.450	0.740	18.796	10.000	44.480	0.750	19.05	0.047	1.19	16.00	HD	CG	Z
0.375	9.525	II-77	2.00	50.800	0.281	7.137	10.00	1.750	0.940	23.876	9.800	43.590	0.870	22.10	0.047	1.19	18.50	SST	CG	N
0.375	9.525	B2-52	2.00	50.800	0.279	7.087	15.00	2.625	1.100	27.940	15.000	66.720	0.860	21.84	0.048	1.22	17.00	MW	C	N
0.375	9.525	2579	2.00	50.800	0.275	6.985	17.00	2.975	0.930	23.622	16.000	71.168	0.850	21.59	0.050	1.27	17.00	MW	CG	Z
0.375	9.525	3631	2.00	50.800	0.263	6.680	36.00	6.300	0.620	15.748	23.000	102.304	0.780	19.81	0.056	1.42	14.00	MW	CG	Z
0.375	9.525	B18-172	2.00	50.800	0.251	6.375	44.00	7.700	0.470	11.938	21.000	93.408	0.990	25.15	0.062	1.57	16.00	SST	CG	N
0.375	9.525	11225	2.03	51.562	0.233	5.918	73.00	12.775	0.420	10.668	31.000	137.888	1.400	35.56	0.071	1.80	19.80	SPR	CG	Z
0.375	9.525	I-37	2.06	52.324	0.247	6.274	50.00	8.750	0.480	12.192	24.000	106.752	1.150	29.21	0.064	1.63	18.00	SPR	CG	Z
0.375	9.525	MM-57	2.19	55.626	0.315	8.001	2.60	0.455	1.600	40.640	4.100	18.237	0.390	9.91	0.030	0.76	13.00	MW	CG	GI
0.375	9.525	12686	2.25	57.150	0.317	8.052	1.90	0.333	1.300	33.020	2.500	11.120	0.410	10.41	0.029	0.74	13.00	SST	C	N
0.375	9.525	14	2.25	57.150	0.251	6.375	34.00	5.950	0.650	16.510	22.000	97.856	1.460	37.08	0.062	1.57	22.50	HD	C	Z
0.375	9.525	2788	2.25	57.150	0.251	6.375	39.00	6.825	0.650	14.224	22.000	97.856	1.230	31.24	0.062	1.57	20.00	SPR	CG	Z
0.375	9.525	4180	2.25	57.150	0.247	6.274	45.00	7.875	0.540	13.716	24.000	106.752	1.340	34.04	0.064	1.63	20.00	SPR	C	Z
0.375	9.525	3557	2.38	60.325	0.293	7.442	5.50	0.963	1.500	38.100	8.000	35.584	0.900	22.86	0.041	1.04	22.00	MW	CG	Z
0.375	9.525	K-57	2.38	60.452	0.327	8.306	1.00	0.175	2.000	50.800	2.000	8.896	0.340	8.64	0.024	0.61	13.00	MW	C	GI
0.375	9.525	3928	2.38	60.452	0.307	7.798	2.70	0.473	1.600	40.640	4.200	18.682	0.710	18.03	0.034	0.86	20.00	SPR	C	Z
0.375	9.525	12471	2.38	60.452	0.275	6.985	14.00	2.450	0.850	21.590	12.000	53.376	1.050	26.67	0.050	1.27	21.00	SPR	CG	Z
0.375	9.525	S-1122	2.50	63.500	0.251	6.375	23.00	4.025	0.908	23.063	21.000	93.408	1.823	46.30	0.063	1.59	29.00	SST	CG	N
0.375	9.525	S-1621	2.53	64.262	0.285	7.239	7.90	1.383	1.100	27.940	8.600	38.253	0.970	24.64	0.045	1.14	20.50	SST	C	N
0.375	9.525	11733	2.59	65.786	0.250	6.350	33.00	5.775	0.690	17.526	22.000	97.856	1.560	39.62	0.063	1.60	24.00	SPR	CG	Z
0.375	9.525	I-48	2.63	66.802	0.295	7.493	5.80	1.015	1.100	27.940	6.500	28.912	0.790	20.07	0.040	1.02	18.80	SPR	C	N
0.375	9.525	11981	2.66	67.564	0.295	7.493	6.10	1.068	1.100	27.940	6.500	28.912	0.760	19.30	0.040	1.02	18.00	SPR	C	Z
0.375	9.525	B2-49	2.75	69.850	0.291	7.391	6.40	1.120	1.100	27.940	7.100	31.581	0.780	19.81	0.042	1.07	18.50	SST	CG	N
0.375	9.525	12537	2.91	73.914	0.231	5.867	56.00	9.800	0.570	14.478	32.000	142.336	2.020	51.31	0.072	1.83	27.00	SPR	C	N
0.375	9.525	12201	3.00	76.200	0.313	7.950	1.50	0.263	2.200	55.880	3.300	14.678	0.780	19.81	0.031	0.79	24.00	MW	C	Z
0.375	9.525	12257	3.00	76.200	0.291	7.391	6.50	1.138	1.200	30.480	7.500	33.360	0.900	22.86	0.042	1.07	20.50	SPR	C	Z
0.375	9.525	10002	3.00	76.200	0.281	7.137	10.00	1.750	1.000	25.400	10.000	44.480	1.060	26.92	0.047	1.19	21.50	SPR	C	Z
0.375	9.525	B17-177	3.19	81.026	0.281	7.137	6.60	1.155	1.600	40.640	10.000	44.480	1.500	38.10	0.047	1.19	32.00	SPR	CG	Z
0.375	9.525	1713	3.34	84.836	0.299	7.595	2.70	0.473	2.100	53.340	5.600	24.909	1.230	31.24	0.038	0.97	31.30	SPR	C	Z
0.375	9.525	10921	3.38	85.852	0.273	6.934	11.00	1.925	1.100	27.940	12.000	53.376	1.430	36.32	0.051	1.30	27.00	SPR	C	Z
0.375	9.525	3134	3.47	88.138	0.267	6.782	13.00	2.275	1.100	27.940	15.000	66.720	1.650	41.91	0.054	1.37	29.50	SPR	C	Z
0.375	9.525	S-1335	3.50	88.900	0.313	7.950	1.40	0.245	2.100	53.340	3.000	13.344	0.710	18.03	0.031	0.79	22.00	SST	C	N
0.375	9.525	12007	3.50	88.900	0.295	7.493	4.70	0.823	1.400	35.560	6.500	28.912	0.960	24.38	0.040	1.02	23.00	SPR	C	Z
0.375	9.525	2545	3.50	88.900	0.263	6.680	16.00	2.800	1.000	25.400	16.000	71.168	1.720	43.69	0.056	1.42	29.70	SPR	C	Z
0.375	9.525	2947	3.63	92.202	0.293	7.442	3.20	0.560	2.100	53.340	6.800	30.246	1.520	38.61	0.041	1.04	36.00	SPR	C	Z
0.375	9.525	3921	3.75	95.250	0.247	6.274	22.00	3.850	1.100	27.940	24.000	106.752	2.500	63.50	0.064	1.63	39.00	SPR	CG	Z
0.375	9.525	12210	3.75	95.250	0.245	6.223	23.00	4.025	1.100	27.940	25.000	111.200	2.540	64.52	0.065	1.65	39.00	SPR	CG	N
0.375	9.525	4301	3.75	95.250	0.231	5.867	40.00	7.000	0.800	20.320	32.000	142.336	2.660	67.56	0.072	1.83	37.00	SPR	CG	Z
0.375	9.525	B4-7	4.00	101.600	0.329	8.357	3.70	0.648	0.530	13.462	2.000	8.896	0.130	3.30	0.023	0.58	4.50	MW	C	N
0.375	9.525	10600	4.00	101.600	0.275	6.985	6.20	1.085	1.800	45.720	11.000	48.928	2.200	55.88	0.050	1.27	44.00	SPR	CG	Z
0.375	9.525	10173	4.50	114.300	0.275	6.985	6.90	1.208	1.700	43.180	12.000	53.376	2.000	50.80	0.050	1.27	40.00	SPR	CG	Z
0.375	9.525	3103	7.50	190.500	0.251	6.375	12.00	2.100	1.900	48.260	22.000	97.856	3.910	99.31	0.062	1.57	62.00	SPR	C	Z
0.375	9.525	517	9.00	228.600	0.281	7.137	2.60	0.455	4.200	106.680	10.000	44.480	3.880	98.55	0.047	1.19	81.50	HD	C	Z
0.375	9.525	12649	10.50	266.700	0.299	7.595	1.10	0.193	5.100	129.540	5.600	24.909	2.740	69.60	0.038	0.97	71.00	SPR	O	N
0.375	9.525	508	12.00	304.800	0.251	6.375	5.90	1.033	3.700	93.980	22.000	97.856	7.440	188.98	0.062	1.57	119.00	HD	C	Z
0.38	9.652	A12-31	1.00	25.400	0.338	8.585	1.10	0.193	0.820	20.828	0.900	4.003	0.180	4.57	0.021	0.53	7.50	MW	C	Z
0.39	9.906	K-73	0.25	6.350	0.310	7.874	75.00	13.125	0.080	2.032	5.900	26.243	0.120	3.05	0.040	1.02	3.00	SST	CG	N
0.39	9.906	10472	0.31	7.874	0.346	8.788	1.20	0.210	0.130	3.302	0.150	0.667	0.190	4.83	0.022	0.56				




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.39	9.906	S-47	0.63	16.002	0.266	6.756	105.00	18.375	0.182	4.623	19.100	84.957	0.448	11.38	0.063	1.59	7.20	SST CG N
0.39	9.906	I-23	0.69	17.526	0.328	8.331	8.20	1.435	0.490	12.446	4.000	17.792	0.200	5.08	0.031	0.79	5.50	MW CG N
0.39	9.906	AA-28	0.69	17.526	0.310	7.874	19.00	3.325	0.310	7.874	5.900	26.243	0.240	6.10	0.040	1.02	6.00	SST CG N
0.39	9.906	71286	0.69	17.526	0.304	7.722	29.00	5.075	0.380	9.652	11.000	48.928	0.260	6.60	0.043	1.09	6.13	MW CG N
0.39	9.906	71286S	0.69	17.526	0.304	7.722	24.00	4.200	0.300	7.620	7.300	32.470	0.260	6.60	0.043	1.09	6.13	SST CG N
0.39	9.906	71301	0.69	17.526	0.296	7.518	41.00	7.175	0.350	8.890	14.000	62.272	0.290	7.37	0.047	1.19	6.25	MW CG N
0.39	9.906	71301S	0.69	17.526	0.296	7.518	34.00	5.950	0.270	6.858	9.500	42.256	0.290	7.37	0.047	1.19	6.25	SST CG N
0.39	9.906	B5-64	0.75	19.050	0.372	9.449	0.03	0.005	0.680	17.272	0.020	0.089	0.070	1.78	0.009	0.23	7.00	MW CG N
0.39	9.906	PP-91	0.75	19.050	0.310	7.874	12.00	2.100	0.390	9.906	4.900	21.795	0.360	9.14	0.040	1.02	8.00	SST C N
0.39	9.906	71287	0.75	19.050	0.304	7.722	26.00	4.550	0.410	10.414	11.000	48.928	0.280	7.11	0.043	1.09	6.50	MW CG N
0.39	9.906	71287S	0.75	19.050	0.304	7.722	22.00	3.850	0.330	8.382	7.300	32.470	0.280	7.11	0.043	1.09	6.50	SST CG N
0.39	9.906	2862	0.75	19.050	0.296	7.518	35.00	6.125	0.290	7.366	10.000	44.480	0.380	9.65	0.047	1.19	7.00	SPR C Z
0.39	9.906	71302	0.75	19.050	0.296	7.518	35.00	6.125	0.410	10.414	14.000	62.272	0.330	8.38	0.047	1.19	7.00	MW CG N
0.39	9.906	71302S	0.75	19.050	0.296	7.518	29.00	5.075	0.320	8.128	9.500	42.256	0.330	8.38	0.047	1.19	7.00	SST CG N
0.39	9.906	B9-5	0.75	19.050	0.278	7.061	95.00	16.625	0.170	4.318	16.000	71.168	0.340	8.64	0.056	1.42	6.00	SPR CG N
0.39	9.906	3604	0.75	19.050	0.272	6.909	120.00	21.000	0.210	5.334	25.000	111.200	0.350	8.89	0.059	1.50	6.00	MW CG Z
0.39	9.906	K-82	0.75	19.050	0.266	6.756	150.00	26.250	0.140	3.556	21.000	93.408	0.370	9.40	0.062	1.57	6.00	HD CG N
0.39	9.906	11290	0.81	20.574	0.348	8.839	1.20	0.210	0.670	17.018	0.820	3.647	0.150	3.81	0.021	0.53	6.00	SST C N
0.39	9.906	NN-47	0.81	20.574	0.334	8.484	2.80	0.490	0.570	14.478	1.600	7.117	0.250	6.35	0.028	0.71	7.75	SST C N
0.39	9.906	HH-18	0.81	20.574	0.326	8.280	6.30	1.103	0.500	12.700	3.200	14.234	0.240	6.10	0.032	0.81	6.50	SST C N
0.39	9.906	71288	0.81	20.574	0.304	7.722	24.00	4.200	0.450	11.430	11.000	48.928	0.300	7.62	0.043	1.09	6.88	MW CG N
0.39	9.906	71288S	0.81	20.574	0.304	7.722	20.00	3.500	0.360	9.144	7.300	32.470	0.300	7.62	0.043	1.09	6.88	SST CG N
0.39	9.906	71303	0.81	20.574	0.296	7.518	34.00	5.950	0.420	10.668	14.000	62.272	0.330	8.38	0.047	1.19	7.13	MW CG N
0.39	9.906	71303S	0.81	20.574	0.296	7.518	29.00	5.075	0.330	8.382	9.500	42.256	0.330	8.38	0.047	1.19	7.13	SST CG N
0.39	9.906	A-91	0.88	22.352	0.342	8.687	1.60	0.280	0.660	16.764	1.100	4.893	0.220	5.59	0.024	0.61	8.00	MW CG N
0.39	9.906	CC-78	0.88	22.352	0.340	8.636	2.70	0.473	0.570	14.478	1.500	6.672	0.170	4.32	0.025	0.64	5.75	SST C N
0.39	9.906	11448	0.88	22.352	0.332	8.433	4.80	0.840	0.500	12.700	2.400	10.675	0.200	5.08	0.029	0.74	6.00	SST C N
0.39	9.906	10919	0.88	22.352	0.330	8.382	5.50	0.963	0.470	11.938	2.600	11.565	0.210	5.33	0.030	0.76	6.00	SST C N
0.39	9.906	B10-16	0.88	22.352	0.322	8.179	14.00	2.450	0.290	7.366	4.100	18.237	0.200	5.08	0.034	0.86	5.00	SPR C N
0.39	9.906	H-31	0.88	22.352	0.320	8.128	6.00	1.050	0.560	14.224	3.400	15.123	0.320	8.13	0.035	0.89	9.00	SST CG N
0.39	9.906	3845	0.88	22.352	0.310	7.874	17.00	2.975	0.370	9.398	6.300	28.022	0.280	7.11	0.040	1.02	7.00	SPR CG Z
0.39	9.906	B15-34	0.88	22.352	0.310	7.874	13.00	2.275	0.470	11.938	5.900	26.243	0.320	8.13	0.040	1.02	8.00	SST CG N
0.39	9.906	71289	0.88	22.352	0.304	7.722	22.00	3.850	0.490	12.446	11.000	48.928	0.320	8.13	0.043	1.09	7.38	MW CG N
0.39	9.906	71289S	0.88	22.352	0.304	7.722	19.00	3.325	0.390	9.906	7.300	32.470	0.320	8.13	0.043	1.09	7.38	SST CG N
0.39	9.906	71304	0.88	22.352	0.296	7.518	29.00	5.075	0.490	12.446	14.000	62.272	0.380	9.65	0.047	1.19	8.13	MW CG N
0.39	9.906	71304S	0.88	22.352	0.296	7.518	24.00	4.200	0.390	9.906	9.500	42.256	0.380	9.65	0.047	1.19	8.13	SST CG N
0.39	9.906	AA-44	0.88	22.352	0.290	7.366	34.00	5.950	0.320	8.128	11.000	48.928	0.400	10.16	0.050	1.27	8.00	SST CG N
0.39	9.906	S-1694	0.91	23.114	0.334	8.484	4.00	0.700	0.530	13.462	2.100	9.341	0.200	5.08	0.028	0.71	6.00	SST C N
0.39	9.906	3576	0.91	23.114	0.320	8.128	4.70	0.823	0.480	12.192	2.200	9.786	0.430	10.92	0.035	0.89	12.30	HD CG GI
0.39	9.906	BB-8	0.94	23.876	0.350	8.890	0.75	0.131	0.770	19.558	0.580	2.580	0.170	4.32	0.020	0.51	7.25	SST C N
0.39	9.906	71290	0.94	23.876	0.304	7.722	20.00	3.500	0.530	13.462	11.000	48.928	0.340	8.64	0.043	1.09	7.88	MW CG N
0.39	9.906	71290S	0.94	23.876	0.304	7.722	17.00	2.975	0.430	10.922	7.300	32.470	0.340	8.64	0.043	1.09	7.88	SST CG N
0.39	9.906	71305	0.94	23.876	0.296	7.518	28.00	4.900	0.490	12.446	14.000	62.272	0.380	9.65	0.047	1.19	8.13	MW CG N
0.39	9.906	71305S	0.94	23.876	0.296	7.518	24.00	4.200	0.390	9.906	9.500	42.256	0.380	9.65	0.047	1.19	8.13	SST CG N
0.39	9.906	MM-43	0.94	23.876	0.230	5.842	395.00	69.125	0.100	2.540	41.000	182.368	0.560	14.22	0.080	2.03	7.00	SPR CG BO
0.39	9.906	A12-14	0.97	24.638	0.346	8.788	1.20	0.210	0.780	19.812	0.960	4.270	0.190	4.83	0.022	0.56	7.50	MW CG Z
0.39	9.906	10955	0.97	24.638	0.344	8.738	1.50	0.263	0.770	19.558	1.100	4.893	0.200	5.08	0.023	0.58	7.50	MW CG Z
0.39	9.906	S-912	0.97	24.638	0.308	7.823	12.00	2.100	0.530	13.462	6.300	28.022	0.370	9.40	0.041	1.04	9.00	SST CG N
0.39	9.906	U-30	0.97	24.638	0.262	6.655	73.00	12.775	0.300	7.620	22.000	97.856	0.660	16.76	0.064	1.63	10.30	SST CG N
0.39	9.906	A-82	1.00	25.400	0.320	8.128	8.80	1.540	0.480	12.192	4.300	19.126	0.300	7.62	0.035	0.89	7.50	SPR C Z
0.39	9.906	O-154	1.00	25.400	0.308	7.823	13.00	2.275	0.530	13.462	6.800	30.246	0.430	10.92	0.041	1.04	9.50	SPR C GI
0.39	9.906	71291	1.00	25.400	0.304	7.722	19.00	3.325	0.580	14.732	11.000	48.928	0.350	8.89	0.043	1.09	8.25	MW CG N
0.39	9.906	71291S	1.00	25.400	0.304	7.722	16.00	2.800	0.460	11.684	7.300	32.470	0.350	8.89	0.043	1.09	8.25	SST CG N
0.39	9.906	71306	1.00	25.400	0.296	7.518	27.00	4.725	0.520	13.208	14.000	62.272	0.400	10.16	0.047	1.19	8.50	MW CG N
0.39	9.906	71306S	1.00	25.400	0.296	7.518	23.00	4.025	0.420	10.668	9.500	42.256	0.400	10.16	0.047	1.19	8.50	SST CG N
0.39	9.906	PP-6	1.00	25.400	0.290	7.366	24.00	4.200	0.450	11.430	11.000	48.928	0.530	13.46	0.050	1.27	10.50	SST CG N
0.39	9.906	B9-28																




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh								
0.39	9.906	S-894	1.28	32.512	0.260	6.604	52.00	9.100	0.340	8.636	18.000	80.064	0.940	23.88	0.065	1.65	14.50	SST	CG	N
0.39	9.906	QQ-54	1.34	34.036	0.318	8.077	6.80	1.190	0.940	23.876	6.400	28.467	0.400	10.16	0.036	0.91	10.00	MW	C	Z
0.39	9.906	3850	1.38	35.052	0.330	8.382	4.20	0.735	0.940	23.876	3.900	17.347	0.270	6.86	0.030	0.76	8.00	MW	CG	Z
0.39	9.906	10037	1.38	35.052	0.328	8.331	2.90	0.508	1.000	25.400	2.900	12.899	0.370	9.40	0.031	0.79	12.00	MW	CG	Z
0.39	9.906	A-89	1.38	35.052	0.308	7.823	9.20	1.610	0.690	17.526	6.300	28.022	0.450	11.43	0.041	1.04	11.00	SST	CG	N
0.39	9.906	71294	1.38	35.052	0.304	7.722	13.00	2.275	0.810	20.574	11.000	48.928	0.460	11.68	0.043	1.09	10.80	MW	CG	N
0.39	9.906	71294S	1.38	35.052	0.304	7.722	11.00	1.925	0.640	16.256	7.300	32.470	0.460	11.68	0.043	1.09	10.80	SST	CG	N
0.39	9.906	71309	1.38	35.052	0.296	7.518	19.00	3.325	0.750	19.050	14.000	62.272	0.530	13.46	0.047	1.19	11.30	MW	CG	N
0.39	9.906	71309S	1.38	35.052	0.296	7.518	16.00	2.800	0.590	14.986	9.500	42.256	0.530	13.46	0.047	1.19	11.30	SST	CG	N
0.39	9.906	NN-54	1.47	37.338	0.322	8.179	4.60	0.805	0.820	20.828	3.800	16.902	0.370	9.40	0.034	0.86	10.00	SST	C	N
0.39	9.906	MM-84	1.50	38.100	0.308	7.823	8.10	1.418	0.830	21.082	6.800	30.246	0.600	15.24	0.041	1.04	13.80	SPR	CG	B0
0.39	9.906	71295	1.50	38.100	0.304	7.722	12.00	2.100	0.880	22.352	11.000	48.928	0.500	12.70	0.043	1.09	11.60	MW	CG	N
0.39	9.906	71295S	1.50	38.100	0.304	7.722	10.00	1.750	0.700	17.780	7.300	32.470	0.500	12.70	0.043	1.09	11.60	SST	CG	N
0.39	9.906	71310	1.50	38.100	0.296	7.518	17.00	2.975	0.820	20.828	14.000	62.272	0.570	14.48	0.047	1.19	12.10	MW	CG	N
0.39	9.906	71310S	1.50	38.100	0.296	7.518	15.00	2.625	0.650	16.510	9.500	42.256	0.570	14.48	0.047	1.19	12.10	SST	CG	N
0.39	9.906	3073	1.53	38.862	0.296	7.518	13.00	2.275	0.760	19.304	10.000	44.480	0.710	18.03	0.047	1.19	15.00	SPR	CG	Z
0.39	9.906	12638	1.69	42.926	0.312	7.925	6.10	1.068	0.900	22.860	5.500	24.464	0.550	13.97	0.039	0.99	13.00	SST	C	N
0.39	9.906	L-34	1.75	44.450	0.350	8.890	0.33	0.058	1.400	35.560	0.460	2.046	0.340	8.64	0.020	0.51	16.00	MW	C	Z
0.39	9.906	BB-76	1.75	44.450	0.346	8.788	0.53	0.093	1.400	35.560	0.770	3.425	0.310	7.87	0.022	0.56	13.00	SST	C	N
0.39	9.906	71296	1.75	44.450	0.304	7.722	10.00	1.750	1.000	25.400	11.000	48.928	0.570	14.48	0.043	1.09	13.30	MW	CG	N
0.39	9.906	71296S	1.75	44.450	0.304	7.722	8.90	1.558	0.820	20.828	7.300	32.470	0.570	14.48	0.043	1.09	13.30	SST	CG	N
0.39	9.906	71311	1.75	44.450	0.296	7.518	15.00	2.625	0.960	24.384	14.000	62.272	0.660	16.76	0.047	1.19	14.00	MW	CG	N
0.39	9.906	71311S	1.75	44.450	0.296	7.518	12.00	2.100	0.770	19.558	9.500	42.256	0.660	16.76	0.047	1.19	14.00	SST	CG	N
0.39	9.906	2922	1.81	45.974	0.348	8.839	0.40	0.070	1.500	38.100	0.580	2.580	0.360	9.14	0.021	0.53	16.00	MW	C	Z
0.39	9.906	H-86	1.88	47.752	0.350	8.890	0.35	0.061	1.600	40.640	0.540	2.402	0.320	8.13	0.020	0.51	15.00	MW	CG	Z
0.39	9.906	3314	1.88	47.752	0.296	7.518	17.00	2.975	0.570	14.732	10.000	44.480	0.610	15.49	0.047	1.19	12.00	HD	CG	Z
0.39	9.906	TT-29	1.88	47.752	0.290	7.366	14.00	2.450	0.750	19.050	11.000	48.928	0.800	20.32	0.050	1.27	16.00	SST	CG	N
0.39	9.906	I-50	1.88	47.752	0.276	7.010	28.00	4.900	0.580	14.732	17.000	75.616	0.940	23.88	0.057	1.45	16.50	SPR	CG	GI
0.39	9.906	2607	2.00	50.800	0.308	7.823	6.40	1.120	1.300	33.020	8.000	35.584	0.740	18.80	0.041	1.04	17.00	MW	C	GI
0.39	9.906	71297	2.00	50.800	0.304	7.722	9.80	1.715	1.100	27.940	11.000	48.928	0.600	15.24	0.043	1.09	14.00	MW	CG	N
0.39	9.906	71297S	2.00	50.800	0.304	7.722	8.30	1.453	0.880	22.352	7.300	32.470	0.600	15.24	0.043	1.09	14.00	SST	CG	N
0.39	9.906	71312	2.00	50.800	0.296	7.518	13.00	2.275	1.100	27.940	14.000	62.272	0.740	18.80	0.047	1.19	15.80	MW	CG	N
0.39	9.906	71312S	2.00	50.800	0.296	7.518	11.00	1.925	0.880	22.352	9.500	42.256	0.740	18.80	0.047	1.19	15.80	SST	CG	N
0.39	9.906	2943	2.03	51.562	0.338	8.858	1.50	0.263	1.700	43.180	2.600	11.565	0.290	7.37	0.026	0.66	11.00	MW	CG	Z
0.39	9.906	2883	2.13	54.102	0.296	7.518	11.00	1.925	0.950	24.130	10.000	44.480	0.860	21.84	0.047	1.19	18.30	SPR	CG	Z
0.39	9.906	GG-86	2.25	57.150	0.326	8.280	2.00	0.350	1.600	40.640	3.200	14.234	0.540	13.72	0.032	0.81	16.00	SST	C	N
0.39	9.906	11396	2.69	68.326	0.282	7.163	17.00	2.975	0.830	21.082	14.000	62.272	1.190	30.23	0.054	1.37	21.00	HD	C	Z
0.39	9.906	S-1337	3.25	82.550	0.288	7.315	10.00	1.750	1.100	27.940	11.000	48.928	1.250	31.75	0.051	1.30	23.50	SST	C	N
0.39	9.906	3392	3.38	85.852	0.298	7.569	7.50	1.313	1.300	33.020	9.500	42.256	1.100	27.94	0.046	1.17	23.00	SPR	CG	Z
0.39	9.906	10901	3.50	88.900	0.314	7.976	3.80	0.665	1.400	35.560	5.400	24.019	0.760	19.30	0.038	0.97	20.00	SPR	CG	N
0.39	9.906	11465	4.75	120.650	0.326	8.280	1.24	0.217	2.550	64.770	3.160	14.056	0.830	21.08	0.032	0.81	25.00	SST	C	N
0.406	10.312	BB-78	0.38	9.652	0.368	9.347	0.94	0.165	0.280	7.112	0.260	1.156	0.100	2.54	0.019	0.48	5.00	SST	C	N
0.406	10.312	B-62	0.38	9.652	0.336	8.534	21.00	3.675	1.90	4.826	4.100	18.237	0.140	3.56	0.035	0.89	4.00	SPR	CG	Z
0.406	10.312	12533	0.41	10.414	0.370	9.398	1.50	0.263	0.330	8.382	0.490	2.180	0.080	2.03	0.018	0.46	3.50	SST	C	N
0.406	10.312	J-41	0.41	10.414	0.370	9.398	0.86	0.151	0.300	7.620	0.260	1.156	0.110	2.79	0.018	0.46	5.00	MW	C	N
0.406	10.312	A-66	0.41	10.414	0.348	8.839	6.30	1.103	0.260	6.604	1.700	7.562	0.150	3.81	0.029	0.74	5.00	MW	CG	N
0.406	10.312	M-24	0.41	10.414	0.306	7.772	72.00	12.600	0.150	3.810	11.000	48.928	0.240	6.10	0.050	1.27	4.75	SPR	CG	N
0.406	10.312	S-1096	0.44	11.176	0.356	9.042	2.20	0.385	0.260	6.604	0.580	2.580	0.180	4.57	0.025	0.64	6.00	SST	C	N
0.406	10.312	W-28	0.44	11.176	0.350	8.890	7.30	1.278	0.280	7.112	2.100	9.341	0.140	3.56	0.028	0.71	4.00	SST	C	N
0.406	10.312	BB-42	0.44	11.176	0.306	7.772	66.00	11.550	0.160	4.064	11.000	48.928	0.250	6.35	0.050	1.27	5.00	SPR	CG	N
0.406	10.312	JJ-12	0.50	12.700	0.358	9.093	1.90	0.333	0.360	9.144	0.660	2.936	0.140	3.56	0.024	0.61	6.00	SST	CG	N
0.406	10.312	EE-89	0.50	12.700	0.348	8.839	6.30	1.103	0.330	8.382	2.100	9.341	0.170	4.32	0.029	0.74	5.00	MW	C	Z
0.406	10.312	N-63	0.50	12.700	0.334	8.484	16.00	2.800	0.280	7.112	4.400	19.571	0.180	5.08	0.037	0.94	5.50	SPR	CG	Z
0.406	10.312	A10-55	0.50	12.700	0.332															




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.406	10.312	S-1195	0.63	16.002	0.276	7.010	141.00	24.675	0.160	4.064	22.000	97.856	0.390	9.91	0.065	1.65	6.00	SST CG N
0.406	10.312	A9-63	0.66	16.764	0.342	8.687	3.60	0.630	0.300	7.620	1.100	4.893	0.350	8.89	0.032	0.81	10.00	MW C Z
0.406	10.312	BB-13	0.69	17.526	0.346	8.788	4.10	0.718	0.480	12.192	2.000	8.896	0.200	5.08	0.030	0.76	6.75	SST CG N
0.406	10.312	3569	0.69	17.526	0.344	8.738	3.10	0.543	0.350	8.890	1.100	4.893	0.340	8.64	0.031	0.79	10.00	MW C Z
0.406	10.312	S-1231	0.69	17.526	0.336	8.534	9.40	1.645	0.410	10.414	3.800	16.902	0.250	6.35	0.035	0.89	6.00	SST C N
0.406	10.312	B10-2	0.69	17.526	0.278	7.061	151.00	26.425	0.150	3.810	22.000	97.856	0.380	9.65	0.064	1.63	6.00	SPR CG N
0.406	10.312	YY-46	0.72	18.288	0.342	8.687	4.80	0.840	0.430	10.922	2.100	9.341	0.290	7.37	0.032	0.81	8.00	MW C Z
0.406	10.312	PP-3	0.72	18.288	0.326	8.280	16.00	2.800	0.360	9.144	5.700	25.354	0.250	6.35	0.040	1.02	6.25	SST CG N
0.406	10.312	V-7	0.75	19.050	0.352	8.941	1.80	0.315	0.480	12.192	0.840	3.736	0.270	6.86	0.027	0.69	10.00	MW CG N
0.406	10.312	NN-88	0.75	19.050	0.346	8.788	3.10	0.543	0.450	11.430	1.400	6.227	0.300	7.62	0.030	0.76	9.00	MW C Z
0.406	10.312	S-16	0.75	19.050	0.344	8.738	2.40	0.420	0.380	9.652	0.920	4.092	0.370	9.40	0.031	0.79	11.00	SST C N
0.406	10.312	II-89	0.75	19.050	0.332	8.433	9.30	1.628	0.450	11.430	4.200	18.682	0.300	7.62	0.037	0.94	7.00	SST C N
0.406	10.312	FF-8	0.75	19.050	0.326	8.280	11.00	1.925	0.430	10.922	4.800	21.350	0.320	8.13	0.040	1.02	8.00	SST CG N
0.406	10.312	10857	0.75	19.050	0.298	7.569	51.00	8.925	0.270	6.858	14.000	62.272	0.410	10.41	0.054	1.37	7.50	SPR CG GI
0.406	10.312	4327	0.75	19.050	0.282	7.163	116.00	20.300	0.180	4.572	20.000	88.960	0.400	10.16	0.062	1.57	6.50	SPR CG Z
0.406	10.312	K-81	0.75	19.050	0.278	7.061	151.00	26.425	0.150	3.810	22.000	97.856	0.380	9.65	0.064	1.63	6.00	SPR CG N
0.406	10.312	A12-27	0.80	20.320	0.364	9.246	0.49	0.086	0.530	13.462	0.260	1.156	0.270	6.86	0.021	0.53	12.00	MW C N
0.406	10.312	10811	0.81	20.574	0.382	9.703	0.09	0.016	0.720	18.288	0.060	0.267	0.100	2.54	0.012	0.30	7.00	SST C N
0.406	10.312	S-1323	0.81	20.574	0.370	9.398	0.28	0.049	0.630	16.002	0.180	0.801	0.180	4.57	0.018	0.46	10.00	SST CG N
0.406	10.312	10155	0.81	20.574	0.366	9.296	0.53	0.093	0.600	15.240	0.320	1.423	0.210	5.33	0.020	0.51	9.50	MW C Z
0.406	10.312	N-49	0.81	20.574	0.286	7.264	78.00	13.650	0.220	5.588	17.000	75.616	0.420	10.67	0.060	1.52	7.00	SST CG N
0.406	10.312	2865	0.88	22.352	0.382	9.703	0.07	0.012	0.760	19.304	0.050	0.222	0.120	3.05	0.012	0.30	9.00	MW C Z
0.406	10.312	1559	0.88	22.352	0.364	9.246	0.78	0.137	0.680	17.272	0.530	2.357	0.190	4.83	0.021	0.53	8.25	MW C Z
0.406	10.312	V-52	0.88	22.352	0.356	9.042	1.30	0.228	0.630	16.002	0.790	3.514	0.250	6.35	0.025	0.64	9.00	SST C N
0.406	10.312	10125	0.88	22.352	0.336	8.534	11.00	1.925	0.390	9.906	4.100	18.237	0.250	6.35	0.035	0.89	6.00	SPR CG GI
0.406	10.312	PP-73	0.88	22.352	0.326	8.280	11.00	1.925	0.510	12.954	5.700	25.354	0.320	8.13	0.040	1.02	8.00	SST CG N
0.406	10.312	GG-82	0.88	22.352	0.324	8.230	10.00	1.750	0.510	12.954	5.300	23.574	0.370	9.40	0.041	1.04	9.00	SST CG N
0.406	10.312	I-96	0.88	22.352	0.310	7.874	24.00	4.200	0.440	11.176	10.000	44.480	0.430	10.92	0.048	1.22	9.00	SPR CG Z
0.406	10.312	GG-90	0.88	22.352	0.288	7.315	66.00	11.550	0.250	6.350	17.000	75.616	0.500	12.70	0.059	1.50	7.50	SST C N
0.406	10.312	S-134	0.88	22.352	0.262	6.655	150.00	26.250	0.190	4.826	28.000	124.544	0.580	14.73	0.072	1.83	8.00	SST CG N
0.406	10.312	3745	0.88	22.352	0.246	6.248	283.00	49.525	0.140	3.556	40.000	177.920	0.640	16.26	0.080	2.03	8.00	SPR CG Z
0.406	10.312	10539	0.91	23.114	0.322	8.179	14.00	2.450	0.480	12.192	6.600	29.357	0.340	8.64	0.042	1.07	8.00	SST CG N
0.406	10.312	1545	0.94	23.876	0.362	9.195	1.00	0.175	0.740	18.796	0.740	3.292	0.200	5.08	0.022	0.56	8.00	MW C Z
0.406	10.312	U-11	0.94	23.876	0.354	8.992	1.70	0.298	0.700	17.780	1.200	5.338	0.230	5.84	0.026	0.66	8.00	SST CG N
0.406	10.312	B-4	0.94	23.876	0.330	8.382	8.60	1.505	0.600	15.240	5.100	22.685	0.340	8.64	0.038	0.97	9.00	HD CG Z
0.406	10.312	2863	0.94	23.876	0.324	8.230	19.00	3.325	0.350	8.890	6.500	28.912	0.310	7.87	0.041	1.04	6.50	SPR C Z
0.406	10.312	L-58	0.94	23.876	0.302	7.671	39.00	6.825	0.310	7.874	12.000	53.376	0.420	10.67	0.052	1.32	8.00	SPR CG Z
0.406	10.312	G-64	0.97	24.638	0.356	9.042	1.50	0.263	0.740	18.796	1.100	4.893	0.230	5.84	0.025	0.64	8.00	SST C N
0.406	10.312	W-3	0.97	24.638	0.344	8.738	4.50	0.788	0.620	15.748	2.800	12.454	0.220	5.59	0.031	0.79	7.00	SST CG N
0.406	10.312	10963	0.98	24.892	0.262	6.655	230.00	40.250	0.130	3.302	30.000	133.440	0.540	13.72	0.072	1.83	6.50	HD C Z
0.406	10.312	U-86	1.00	25.400	0.372	9.449	0.26	0.046	0.850	21.590	0.220	0.979	0.150	3.81	0.017	0.43	9.00	SST CG N
0.406	10.312	S-1152	1.00	25.400	0.368	9.347	0.70	0.123	0.870	22.098	0.610	2.713	0.130	3.30	0.019	0.48	6.00	SST C N
0.406	10.312	S-265	1.00	25.400	0.362	9.195	1.10	0.193	0.840	21.336	0.960	4.270	0.170	4.32	0.022	0.56	6.50	SST C N
0.406	10.312	S-477	1.00	25.400	0.358	9.093	0.46	0.081	0.540	13.716	0.250	1.112	0.460	11.68	0.024	0.61	18.00	SST C N
0.406	10.312	S-1046	1.00	25.400	0.354	8.992	0.65	0.114	0.510	12.954	0.330	1.468	0.490	12.45	0.026	0.66	18.00	SST C N
0.406	10.312	V-65	1.00	25.400	0.342	8.687	3.60	0.630	0.680	17.272	2.400	10.675	0.320	8.13	0.032	0.81	9.00	SST C N
0.406	10.312	3607	1.00	25.400	0.338	8.585	7.50	1.313	0.730	18.542	5.400	24.019	0.270	6.86	0.034	0.86	7.00	MW C GI
0.406	10.312	3624	1.00	25.400	0.326	8.280	10.00	1.750	0.610	15.494	6.100	27.133	0.380	9.65	0.040	1.02	9.50	SPR CG Z
0.406	10.312	941	1.00	25.400	0.306	7.772	28.00	4.900	0.500	12.700	14.000	62.272	0.500	12.70	0.050	1.27	9.00	MW C Z
0.406	10.312	A-49	1.00	25.400	0.282	7.163	95.00	16.625	0.210	5.334	20.000	88.960	0.530	13.46	0.062	1.57	7.50	SPR C Z
0.406	10.312	3901	1.00	25.400	0.278	7.061	67.00	11.725	0.300	7.620	20.000	88.960	0.700	17.78	0.064	1.63	11.00	SPR CG Z
0.406	10.312	QO-39	1.00	25.400	0.278	7.061	93.00	16.275	0.330	8.382	31.000	137.888	0.540	13.72	0.064	1.63	8.50	MW CG Z
0.406	10.312	EE-55	1.03	26.162	0.306	7.772	27.00	4.725	0.400	10.160	11.000	48.928	0.460	11.68	0.050	1.27	9.25	SPR CG N
0.406	10.312	JJ-96	1.06	26.924	0.342	8.687	5.80	1.015	0.570	14.478	3.300	14.678	0.260	6.60	0.032	0.81	7.00	HD C GI
0.406	10.312	3794	1.06	26.924	0.312	7.925	22.00	3.850	0.450	11.430	9.700	43.146	0.420	10.67	0.047	1.19	9.00	SPR CG Z
0.406	10.312	H-41	1.06	26.924	0.298	7.569	28.00	4.900	0.460	11.684	13.000	57.824						




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
0.406	10.312	10216	1.50	38.100	0.304	7.722	22.00	3.850	0.530	13.462	12.000	53.376	0.610	15.49	0.051	1.30	12.00	SPR	CG	Z
0.406	10.312	12242	1.59	40.386	0.282	7.163	47.00	8.225	0.430	10.922	20.000	88.960	0.810	20.57	0.062	1.57	13.00	SPR	CG	Z
0.406	10.312	942	1.63	41.402	0.326	8.280	7.10	1.243	1.100	27.940	7.800	34.694	0.540	13.72	0.040	1.02	12.50	MW	CG	C
0.406	10.312	B3-39	1.63	41.402	0.282	7.163	45.00	7.875	0.450	11.430	20.000	88.960	0.840	21.34	0.062	1.57	13.50	SPR	CG	N
0.406	10.312	3621	1.63	41.402	0.280	7.112	51.00	8.925	0.580	14.732	30.000	133.440	0.820	20.83	0.063	1.60	13.00	MW	CG	Z
0.406	10.312	FF-76	1.75	44.450	0.346	8.788	3.10	0.543	1.200	30.480	3.800	16.902	0.270	6.86	0.030	0.76	9.00	MW	CG	N
0.406	10.312	S-935	1.75	44.450	0.324	8.230	6.30	1.103	0.970	24.638	6.100	27.133	0.560	14.22	0.041	1.04	13.80	SST	CG	N
0.406	10.312	8	1.75	44.450	0.282	7.163	37.00	6.475	0.550	13.970	20.000	88.960	0.990	25.15	0.062	1.57	16.00	HD	CG	Z
0.406	10.312	FF-88	1.75	44.450	0.186	4.724	738.00	129.150	0.120	3.048	89.000	395.872	1.430	36.32	0.110	2.79	13.00	SPR	CG	N
0.406	10.312	11131	1.78	45.212	0.342	8.687	3.40	0.595	1.300	33.020	4.600	20.461	0.370	9.40	0.032	0.81	10.50	MW	C	Z
0.406	10.312	2860	1.78	45.212	0.298	7.569	21.00	3.675	0.920	23.368	19.000	84.512	0.840	21.34	0.054	1.37	15.50	MW	CG	Z
0.406	10.312	12235	1.78	45.212	0.284	7.214	44.00	7.700	0.440	11.176	19.000	84.512	0.790	20.07	0.061	1.55	13.00	SPR	CG	Z
0.406	10.312	GG-58	1.88	47.752	0.346	8.788	1.70	0.298	1.400	35.560	2.400	10.675	0.450	11.43	0.030	0.76	15.00	MW	CG	N
0.406	10.312	10533	1.88	47.752	0.294	7.468	21.00	3.675	0.720	18.288	15.000	66.720	1.050	26.67	0.056	1.42	17.80	SPR	C	Z
0.406	10.312	12735	1.91	48.514	0.302	7.671	24.00	4.200	0.520	13.208	12.000	53.376	0.680	17.27	0.052	1.32	12.00	SPR	C	N
0.406	10.312	3646	2.00	50.800	0.336	8.534	3.80	0.665	1.500	38.100	5.700	25.354	0.490	12.45	0.035	0.89	13.00	MW	CG	GI
0.406	10.312	11443	2.00	50.800	0.322	8.179	6.20	1.085	1.100	27.940	7.000	31.136	0.760	19.30	0.042	1.07	17.00	HD	C	Z
0.406	10.312	115	2.00	50.800	0.312	7.925	10.00	1.750	0.950	24.130	9.700	43.146	0.830	21.08	0.047	1.19	16.80	HD	C	Z
0.406	10.312	10873	2.03	51.562	0.294	7.468	22.00	3.850	0.650	16.510	14.000	62.272	0.860	21.84	0.056	1.42	15.30	SST	CG	N
0.406	10.312	3574	2.31	58.674	0.314	7.976	8.60	1.505	1.100	27.940	9.100	40.477	0.830	21.08	0.046	1.17	18.00	HD	CG	Z
0.406	10.312	B14-40	2.34	59.436	0.274	6.960	39.00	6.825	0.630	16.002	24.000	106.752	1.390	35.31	0.066	1.68	20.00	SPR	C	Z
0.406	10.312	4220	2.38	60.452	0.346	8.788	1.70	0.298	1.900	48.260	3.200	14.234	0.480	12.19	0.030	0.76	15.00	MW	C	Z
0.406	10.312	4176	2.38	60.452	0.308	7.823	12.00	2.100	0.910	23.114	11.000	48.928	0.880	22.35	0.049	1.24	17.00	SPR	C	Z
0.406	10.312	EE-93	2.38	60.452	0.306	7.772	12.00	2.100	0.880	22.352	11.000	48.928	0.900	22.86	0.050	1.27	18.00	SPR	CG	Z
0.406	10.312	2507	2.44	61.976	0.250	6.350	77.00	13.475	0.680	17.272	52.000	231.296	1.760	44.70	0.078	1.98	21.50	MW	C	Z
0.406	10.312	11415	2.50	63.500	0.312	7.925	7.20	1.260	1.300	33.020	9.700	43.146	1.130	28.70	0.047	1.19	23.00	HD	C	Z
0.406	10.312	11307	2.50	63.500	0.306	7.772	9.70	1.698	1.100	27.940	10.000	44.480	1.010	25.65	0.050	1.27	20.30	SST	CG	N
0.406	10.312	4261	2.56	65.024	0.344	8.738	1.40	0.245	1.900	48.260	2.600	11.565	0.670	17.02	0.031	0.79	20.50	MW	C	Z
0.406	10.312	11480	2.59	65.786	0.346	8.788	1.70	0.298	2.100	53.340	3.600	16.013	0.480	12.19	0.030	0.76	15.00	MW	CG	Z
0.406	10.312	4216	2.75	69.850	0.344	8.738	1.60	0.280	2.200	55.880	3.400	15.123	0.590	14.99	0.031	0.79	18.00	MW	C	Z
0.406	10.312	22	2.75	69.850	0.311	7.899	7.30	1.278	1.300	33.020	9.700	43.146	1.130	28.70	0.047	1.19	23.00	HD	C	Z
0.406	10.312	1914	2.81	71.374	0.312	7.925	8.70	1.523	1.100	27.940	9.700	43.146	0.960	24.38	0.047	1.19	19.50	SPR	C	Z
0.406	10.312	LL-99	3.25	82.550	0.282	7.163	22.00	3.850	0.940	23.876	20.000	88.960	1.610	40.89	0.062	1.57	26.00	SPR	CG	N
0.406	10.312	10575	3.31	84.074	0.262	6.655	37.00	6.475	0.800	20.320	30.000	133.440	2.160	54.86	0.072	1.83	30.00	SPR	CG	Z
0.406	10.312	10699	4.00	101.600	0.332	8.433	2.30	0.403	2.100	53.340	4.800	21.350	0.940	23.88	0.037	0.94	25.50	SPR	CG	Z
0.406	10.312	3613	4.25	107.950	0.322	8.179	3.30	0.578	2.900	73.660	9.700	43.146	1.260	32.00	0.042	1.07	30.00	MW	CG	Z
0.406	10.312	3802	4.38	111.252	0.316	8.026	3.80	0.665	2.300	58.420	8.600	38.253	1.620	41.15	0.045	1.14	35.00	SPR	C	Z
0.406	10.312	11948	4.38	111.252	0.306	7.772	6.00	1.050	1.800	45.720	11.000	48.928	1.750	44.45	0.050	1.27	35.00	SPR	CG	GI
0.406	10.312	10380	7.25	184.150	0.262	6.655	21.00	3.675	1.400	35.560	30.000	133.440	3.740	95.00	0.072	1.83	52.00	SPR	CG	Z
0.406	10.312	11833	8.25	209.550	0.256	6.502	20.00	3.500	1.500	40.640	31.000	137.888	4.370	111.00	0.075	1.91	57.30	SST	C	N
0.406	10.312	10908	8.50	215.900	0.260	6.604	23.00	4.025	1.400	35.560	31.000	137.888	3.720	94.49	0.073	1.85	51.00	SPR	CG	N
0.41	10.414	12683	2.75	69.850	0.310	7.874	15.00	2.625	0.970	24.638	15.000	66.720	0.780	19.81	0.050	1.27	14.50	MW	C	N
0.42	10.668	H-25	0.28	7.112	0.338	8.585	74.00	12.950	0.090	2.286	6.300	28.022	0.120	3.05	0.041	1.04	3.00	SPR	CG	N
0.42	10.668	B10-50	0.31	7.874	0.340	8.636	67.00	11.725	0.090	2.286	5.900	26.243	0.160	4.06	0.040	1.02	3.00	SPR	CG	N
0.42	10.668	K-83	0.31	7.874	0.340	8.636	59.00	10.325	0.090	2.286	5.500	24.464	0.120	3.05	0.040	1.02	3.00	SST	CG	N
0.42	10.668	JJ-92	0.31	7.874	0.338	8.585	64.00	11.200	0.090	2.286	5.900	26.243	0.160	4.06	0.041	1.04	3.00	SST	C	N
0.42	10.668	LL-95	0.31	7.874	0.326	8.280	117.00	20.475	0.080	2.032	8.800	39.142	0.140	3.56	0.047	1.19	3.00	SST	CG	N
0.42	10.668	MM-67	0.31	7.874	0.320	8.128	156.00	27.300	0.060	1.524	9.900	44.035	0.150	3.81	0.050	1.27	3.00	SST	CG	N
0.42	10.668	XX-51	0.34	8.636	0.312	7.925	108.00	18.900	0.120	3.048	12.000	53.376	0.220	5.59	0.054	1.37	4.00	SST	CG	N
0.42	10.668	DD-21	0.38	9.652	0.340	8.636	59.00	10.325	0.090	2.286	5.500	24.464	0.120	3.05	0.040	1.02	3.00	SST	CG	N
0.42	10.668	A9-42	0.38	9.652	0.334	8.484	61.00	10.675	0.120	3.048	7.300	32.470	0.150	3.81	0.043	1.09	3.50	SPR	CG	Z
0.42	10.668	S-1090	0.38	9.652	0.320	8.128	51.00	8.925	0.130	3.302	6.400	28.467	0.250	6.35	0.050	1.27	5.00	SST	CG	N
0.42	10.668	M-105	0.38	9.652	0.296	7.518	266.00	46.550	0.071	1.803	18.900	84.067	0.223							




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.42	10.668	71339S	0.50	12.700	0.336	8.534	29.00	5.075	0.220	5.588	6.400	28.467	0.180	4.57	0.042	1.07	4.38	SST	CG	N
0.42	10.668	71351	0.50	12.700	0.330	8.382	43.00	7.525	0.270	6.858	12.000	53.376	0.210	5.33	0.045	1.14	4.63	MW	CG	N
0.42	10.668	71351S	0.50	12.700	0.330	8.382	37.00	6.475	0.210	5.334	7.800	34.694	0.210	5.33	0.045	1.14	4.63	SST	CG	N
0.42	10.668	71362	0.50	12.700	0.326	8.280	54.00	9.450	0.240	6.096	13.000	57.824	0.210	5.33	0.047	1.19	4.50	MW	CG	N
0.42	10.668	71362S	0.50	12.700	0.326	8.280	46.00	8.050	0.190	4.826	8.800	39.142	0.210	5.33	0.047	1.19	4.50	SST	CG	N
0.42	10.668	71371S	0.50	12.700	0.324	8.230	52.00	9.100	0.171	4.343	8.900	39.587	0.208	5.28	0.048	1.21	4.40	SST	CG	N
0.42	10.668	71371	0.50	12.700	0.324	8.230	61.00	10.675	0.230	5.842	14.000	62.272	0.220	5.59	0.048	1.22	4.50	MW	CG	N
0.42	10.668	71386	0.50	12.700	0.318	8.077	74.00	12.950	0.210	5.334	16.000	71.168	0.240	6.10	0.051	1.30	4.63	MW	CG	N
0.42	10.668	71386S	0.50	12.700	0.318	8.077	63.00	11.025	0.170	4.318	11.000	48.928	0.240	6.10	0.051	1.30	4.63	SST	CG	N
0.42	10.668	71397	0.50	12.700	0.310	7.874	95.00	16.625	0.200	5.080	19.000	84.512	0.270	6.86	0.055	1.40	4.88	MW	CG	N
0.42	10.668	71397S	0.50	12.700	0.310	7.874	81.00	14.175	0.160	4.064	13.000	57.824	0.270	6.86	0.055	1.40	4.88	SST	CG	N
0.42	10.668	71408	0.50	12.700	0.302	7.671	137.00	23.975	0.170	4.318	24.000	106.752	0.280	7.11	0.059	1.50	4.75	MW	CG	N
0.42	10.668	71408S	0.50	12.700	0.302	7.671	116.00	20.300	0.140	3.556	16.000	71.168	0.280	7.11	0.059	1.50	4.75	SST	CG	N
0.42	10.668	EE-97	0.50	12.700	0.300	7.620	158.00	27.650	0.110	2.794	18.000	80.064	0.270	6.86	0.060	1.52	4.50	SPR	CG	N
0.42	10.668	71419S	0.50	12.700	0.294	7.468	155.00	27.125	0.122	3.099	18.900	84.067	0.293	7.44	0.063	1.59	4.70	SST	CG	N
0.42	10.668	71419	0.50	12.700	0.294	7.468	183.00	32.025	0.160	4.064	29.000	128.992	0.300	7.62	0.063	1.60	4.75	MW	CG	N
0.42	10.668	1803	0.53	13.462	0.330	8.382	44.00	7.700	0.260	6.604	12.000	53.376	0.250	6.35	0.045	1.14	4.50	MW	C	Z
0.42	10.668	F-36	0.53	13.462	0.312	7.925	82.00	14.350	0.160	4.064	13.000	57.824	0.320	8.13	0.054	1.37	5.00	SPR	C	Z
0.42	10.668	Z-33	0.56	14.224	0.370	9.398	1.20	0.210	0.340	8.636	0.400	1.779	0.220	5.59	0.025	0.64	8.75	SST	CG	N
0.42	10.668	H-62	0.56	14.224	0.356	9.042	13.00	2.275	0.230	5.842	3.000	13.344	0.120	3.05	0.032	0.81	3.75	SST	CG	N
0.42	10.668	M-116	0.56	14.224	0.346	8.788	12.00	2.100	0.360	9.144	4.200	18.682	0.200	5.08	0.037	0.94	5.50	SST	CG	N
0.42	10.668	71328	0.56	14.224	0.344	8.738	20.00	3.500	0.350	8.890	7.000	31.136	0.180	4.57	0.038	0.97	4.75	MW	CG	N
0.42	10.668	71328S	0.56	14.224	0.344	8.738	17.00	2.975	0.280	7.112	4.700	20.906	0.180	4.57	0.038	0.97	4.75	SST	CG	N
0.42	10.668	71340	0.56	14.224	0.336	8.534	31.00	5.425	0.300	7.620	9.400	41.811	0.190	4.83	0.042	1.07	4.63	MW	CG	N
0.42	10.668	71340S	0.56	14.224	0.336	8.534	26.00	4.550	0.240	6.096	6.400	28.467	0.190	4.83	0.042	1.07	4.63	SST	CG	N
0.42	10.668	XX-60	0.56	14.224	0.334	8.484	23.00	4.025	0.280	7.112	6.400	28.467	0.280	7.11	0.043	1.09	5.50	SST	C	N
0.42	10.668	11198	0.59	14.986	0.390	9.906	0.28	0.049	0.500	12.700	0.140	0.623	0.100	2.54	0.015	0.38	5.50	SST	C	N
0.42	10.668	A11-52	0.59	14.986	0.210	5.334	2769.00	484.575	0.030	0.762	80.000	355.840	0.420	10.67	0.105	2.67	4.00	SPR	CG	N
0.42	10.668	LL-78	0.59	14.986	0.210	5.334	2769.00	484.575	0.030	0.762	80.000	355.840	0.420	10.67	0.105	2.67	4.00	SPR	CG	N
0.42	10.668	3653	0.63	16.002	0.364	9.246	4.90	0.858	0.460	11.684	2.200	9.786	0.170	4.32	0.028	0.71	5.00	MW	C	Z
0.42	10.668	71314	0.63	16.002	0.350	8.890	15.00	2.625	0.380	9.652	5.500	24.464	0.160	4.06	0.035	0.89	4.63	MW	CG	N
0.42	10.668	71314S	0.63	16.002	0.350	8.890	12.00	2.100	0.300	7.620	3.700	16.458	0.160	4.06	0.035	0.89	4.63	SST	CG	N
0.42	10.668	00-89	0.63	16.002	0.348	8.839	15.00	2.625	0.270	6.858	4.000	17.792	0.200	5.08	0.036	0.91	4.50	SST	C	N
0.42	10.668	71329	0.63	16.002	0.344	8.738	18.00	3.150	0.390	9.906	7.000	31.136	0.190	4.83	0.038	0.97	5.00	MW	CG	N
0.42	10.668	71329S	0.63	16.002	0.344	8.738	15.00	2.625	0.310	7.874	4.700	20.906	0.190	4.83	0.038	0.97	5.00	SST	CG	N
0.42	10.668	71341	0.63	16.002	0.336	8.534	28.00	4.900	0.340	8.636	9.400	41.811	0.210	5.33	0.042	1.07	5.00	MW	CG	N
0.42	10.668	71341S	0.63	16.002	0.336	8.534	23.00	4.025	0.270	6.858	6.400	28.467	0.210	5.33	0.042	1.07	5.00	SST	CG	N
0.42	10.668	B11-13	0.63	16.002	0.336	8.534	27.00	4.725	0.250	6.350	6.800	30.246	0.250	6.35	0.042	1.07	5.00	SPR	C	N
0.42	10.668	S-387	0.63	16.002	0.336	8.534	24.00	4.200	0.270	6.858	6.400	28.467	0.250	6.35	0.042	1.07	5.00	SST	C	N
0.42	10.668	71352	0.63	16.002	0.330	8.382	34.00	5.950	0.340	8.636	12.000	53.376	0.240	6.10	0.045	1.14	5.25	MW	CG	N
0.42	10.668	71352S	0.63	16.002	0.330	8.382	29.00	5.075	0.270	6.858	7.800	34.694	0.240	6.10	0.045	1.14	5.25	SST	CG	N
0.42	10.668	71363	0.63	16.002	0.326	8.280	41.00	7.175	0.320	8.128	13.000	57.824	0.250	6.35	0.047	1.19	5.25	MW	CG	N
0.42	10.668	71363S	0.63	16.002	0.326	8.280	35.00	6.125	0.250	6.350	8.800	39.142	0.250	6.35	0.047	1.19	5.25	SST	CG	N
0.42	10.668	71373S	0.63	16.002	0.324	8.230	38.00	6.650	0.234	5.944	8.900	39.587	0.249	6.32	0.048	1.21	5.20	SST	CG	N
0.42	10.668	71373	0.63	16.002	0.324	8.230	45.00	7.875	0.310	7.874	14.000	62.272	0.250	6.35	0.048	1.22	5.25	MW	CG	N
0.42	10.668	3369	0.63	16.002	0.322	8.179	40.00	7.000	0.270	6.858	11.000	48.928	0.340	8.64	0.049	1.24	6.00	SPR	C	Z
0.42	10.668	71387	0.63	16.002	0.318	8.077	57.00	9.975	0.270	6.858	16.000	71.168	0.270	6.86	0.051	1.30	5.38	MW	CG	N
0.42	10.668	71387S	0.63	16.002	0.318	8.077	48.00	8.400	0.220	5.588	11.000	48.928	0.270	6.86	0.051	1.30	5.38	SST	CG	N
0.42	10.668	71398	0.63	16.002	0.310	7.874	75.00	13.125	0.260	6.604	19.000	84.512	0.310	7.87	0.055	1.40	5.63	MW	CG	N
0.42	10.668	71398S	0.63	16.002	0.310	7.874	64.00	11.200	0.210	5.334	13.000	57.824	0.310	7.87	0.055	1.40	5.63	SST	CG	N
0.42	10.668	71409	0.63	16.002	0.302	7.671	103.00	18.025	0.230	5.842	24.000	106.752	0.330	8.38	0.059	1.50	5.63	MW	CG	N
0.42	10.668	71409S	0.63	16.002	0.302	7.671	88.00	15.400	0.180	4.572	16.000	71.168	0.330	8.38	0.059	1.50	5.63	SST	CG	N
0.42	10.668	71420S	0.63	16.002	0.294	7.468	117.00	20.475	0.161	4.089	18.900	84.067	0.348	8.84	0.063	1.59	5.60	SST	CG	N
0.42	10.668	71420	0.6																	




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh
0.42	10.668	71353	0.75 19.050	0.330 8.382	27.00 4.725	0.420 10.668	12.000	53.376 0.280	7.11 0.045	1.14	6.13	MW CG N
0.42	10.668	71353S	0.75 19.050	0.330 8.382	23.00 4.025	0.340 8.636	7.800	34.694 0.280	7.11 0.045	1.14	6.13	SST CG N
0.42	10.668	71364	0.75 19.050	0.326 8.280	34.00 5.950	0.380 9.652	13.000	57.824 0.280	7.11 0.047	1.19	6.00	MW CG N
0.42	10.668	71364S	0.75 19.050	0.326 8.280	29.00 5.075	0.310 7.874	8.800	39.142 0.280	7.11 0.047	1.19	6.00	SST CG N
0.42	10.668	71374S	0.75 19.050	0.324 8.230	32.00 5.600	0.278 7.061	8.900	39.587 0.278	7.06 0.048	1.21	5.80	SST CG N
0.42	10.668	71374	0.75 19.050	0.324 8.230	37.00 6.475	0.370 9.398	14.000	62.272 0.290	7.37 0.048	1.22	6.00	MW CG N
0.42	10.668	CC-12	0.75 19.050	0.320 8.128	25.00 4.375	0.300 7.620	7.500	33.360 0.450	11.43 0.050	1.27	9.00	HD CG N
0.42	10.668	71388	0.75 19.050	0.318 8.077	46.00 8.050	0.340 8.636	16.000	71.168 0.320	8.13 0.051	1.30	6.25	MW CG N
0.42	10.668	71388S	0.75 19.050	0.318 8.077	39.00 6.825	0.270 6.858	11.000	48.928 0.320	8.13 0.051	1.30	6.25	SST CG N
0.42	10.668	3816	0.75 19.050	0.312 7.925	55.00 9.625	0.240 6.096	13.000	57.824 0.410	10.41 0.054	1.37	6.50	SPR C Z
0.42	10.668	2959	0.75 19.050	0.310 7.874	67.00 11.725	0.210 5.334	14.000	62.272 0.330	8.38 0.055	1.40	6.00	SPR CG Z
0.42	10.668	71399	0.75 19.050	0.310 7.874	62.00 10.850	0.320 8.128	19.000	84.512 0.350	8.89 0.055	1.40	6.38	MW CG N
0.42	10.668	71399S	0.75 19.050	0.310 7.874	52.00 9.100	0.250 6.350	13.000	57.824 0.350	8.89 0.055	1.40	6.38	SST CG N
0.42	10.668	71410	0.75 19.050	0.302 7.671	83.00 14.525	0.290 7.366	24.000	106.752 0.380	9.65 0.059	1.50	6.50	MW CG N
0.42	10.668	71410S	0.75 19.050	0.302 7.671	70.00 12.250	0.230 5.842	16.000	71.168 0.380	9.65 0.059	1.50	6.50	SST CG N
0.42	10.668	GG-97	0.75 19.050	0.296 7.518	83.00 14.525	0.240 6.096	20.000	88.960 0.470	11.94 0.062	1.57	7.50	HD CG N
0.42	10.668	71421S	0.75 19.050	0.294 7.468	93.00 16.275	0.203 5.156	18.900	84.067 0.406	10.31 0.063	1.59	6.50	SST CG N
0.42	10.668	S-1316	0.75 19.050	0.296 7.518	80.00 14.000	0.236 5.994	18.900	84.067 0.451	11.46 0.063	1.59	7.20	SST CG N
0.42	10.668	71421	0.75 19.050	0.294 7.468	109.00 19.075	0.260 6.604	29.000	128.992 0.420	10.67 0.063	1.60	6.63	MW CG N
0.42	10.668	71430	0.75 19.050	0.286 7.264	144.00 25.200	0.240 6.096	34.000	151.232 0.440	11.18 0.067	1.70	6.63	MW CG N
0.42	10.668	71430S	0.75 19.050	0.286 7.264	123.00 21.525	0.190 4.826	23.000	102.304 0.440	11.18 0.067	1.70	6.63	SST CG N
0.42	10.668	2876	0.75 19.050	0.284 7.214	140.00 24.500	0.180 4.572	26.000	115.648 0.480	12.19 0.068	1.73	7.00	SPR CG GI
0.42	10.668	00-40	0.75 19.050	0.260 6.604	263.00 46.025	0.140 3.556	37.000	164.576 0.560	14.22 0.080	2.03	7.00	SST CG N
0.42	10.668	L-63	0.78 19.812	0.380 9.652	0.89 0.156	0.640 16.256	0.570	2.535 0.140	3.56 0.020	0.51	6.00	MW C Z
0.42	10.668	HH-61	0.81 20.574	0.376 9.550	0.92 0.161	0.640 16.256	0.590	2.624 0.180	4.57 0.022	0.56	7.00	SST C N
0.42	10.668	A9-54	0.81 20.574	0.352 8.941	3.70 0.648	0.470 11.938	1.700	7.562 0.340	8.64 0.034	0.86	10.00	SST CG N
0.42	10.668	L-12	0.81 20.574	0.352 8.941	4.80 0.840	0.540 13.716	2.600	11.565 0.270	6.86 0.034	0.86	8.00	SST CG N
0.42	10.668	10553	0.81 20.574	0.300 7.620	88.00 15.400	0.200 5.080	18.000	80.064 0.390	9.91 0.060	1.52	6.50	SPR CG Z
0.42	10.668	S-1205	0.81 20.574	0.276 7.010	144.00 25.200	0.190 4.826	27.000	120.096 0.540	13.72 0.072	1.83	7.50	SST CG N
0.42	10.668	1679	0.84 21.336	0.338 8.585	12.00 2.100	0.470 11.938	5.800	25.798 0.370	9.40 0.041	1.04	8.00	SPR C Z
0.42	10.668	10521	0.84 21.336	0.338 8.585	11.00 1.925	0.520 13.208	5.600	24.909 0.330	8.38 0.041	1.04	8.00	SST CG N
0.42	10.668	B2-42	0.84 21.336	0.312 7.925	59.00 10.325	0.230 5.842	13.000	57.824 0.340	8.64 0.054	1.37	6.25	SPR CG GI
0.42	10.668	71316	0.88 22.352	0.350 8.890	10.00 1.750	0.550 13.970	5.500	24.464 0.200	5.08 0.035	0.89	5.75	MW CG N
0.42	10.668	71316S	0.88 22.352	0.350 8.890	8.50 1.488	0.440 11.176	3.700	16.458 0.200	5.08 0.035	0.89	5.75	SST CG N
0.42	10.668	71331	0.88 22.352	0.344 8.738	12.00 2.100	0.570 14.478	7.000	31.136 0.240	6.10 0.038	0.97	6.38	MW CG N
0.42	10.668	71331S	0.88 22.352	0.344 8.738	10.00 1.750	0.450 11.430	4.700	20.906 0.240	6.10 0.038	0.97	6.38	SST CG N
0.42	10.668	S-1542	0.88 22.352	0.338 8.585	6.40 1.120	0.380 9.652	2.500	11.120 0.490	12.45 0.041	1.04	12.00	SST CG N
0.42	10.668	71343	0.88 22.352	0.336 8.534	19.00 3.325	0.510 12.954	9.400	41.811 0.270	6.86 0.042	1.07	6.50	MW CG N
0.42	10.668	71343S	0.88 22.352	0.336 8.534	16.00 2.800	0.400 10.160	6.400	28.467 0.270	6.86 0.042	1.07	6.50	SST CG N
0.42	10.668	71354	0.88 22.352	0.330 8.382	23.00 4.025	0.500 12.700	12.000	53.376 0.310	7.87 0.045	1.14	6.88	MW CG N
0.42	10.668	71354S	0.88 22.352	0.330 8.382	20.00 3.500	0.400 10.160	7.800	34.694 0.310	7.87 0.045	1.14	6.88	SST CG N
0.42	10.668	71365	0.88 22.352	0.326 8.280	28.00 4.900	0.470 11.938	13.000	57.824 0.320	8.13 0.047	1.19	6.88	MW CG N
0.42	10.668	71365S	0.88 22.352	0.326 8.280	24.00 4.200	0.370 9.398	8.800	39.142 0.320	8.13 0.047	1.19	6.88	SST CG N
0.42	10.668	71376S	0.88 22.352	0.324 8.230	26.00 4.550	0.343 8.712	8.900	39.587 0.320	8.13 0.048	1.21	6.70	SST CG N
0.42	10.668	71376	0.88 22.352	0.324 8.230	31.00 5.425	0.450 11.430	14.000	62.272 0.330	8.38 0.048	1.22	6.88	MW CG N
0.42	10.668	71389	0.88 22.352	0.318 8.077	38.00 6.650	0.410 10.414	16.000	71.168 0.360	9.14 0.051	1.30	7.13	MW CG N
0.42	10.668	71389S	0.88 22.352	0.318 8.077	32.00 5.600	0.330 8.382	11.000	48.928 0.360	9.14 0.051	1.30	7.13	SST CG N
0.42	10.668	3593	0.88 22.352	0.312 7.925	45.00 7.875	0.410 10.414	18.000	80.064 0.460	11.68 0.054	1.37	7.50	C Z
0.42	10.668	10298	0.88 22.352	0.310 7.874	54.00 9.450	0.260 6.604	14.000	62.272 0.390	9.91 0.055	1.40	7.00	SPR CG Z
0.42	10.668	71400	0.88 22.352	0.310 7.874	52.00 9.100	0.370 9.398	19.000	84.512 0.400	10.16 0.055	1.40	7.25	MW CG N
0.42	10.668	71400S	0.88 22.352	0.310 7.874	44.00 7.700	0.300 7.620	13.000	57.824 0.400	10.16 0.055	1.40	7.25	SST CG N
0.42	10.668	71411	0.88 22.352	0.302 7.671	69.00 12.075	0.350 8.890	24.000	106.752 0.440	11.18 0.059	1.50	7.38	MW CG N
0.42	10.668	71411S	0.88 22.352	0.302 7.671	58.00 10.150	0.280 7.112	16.000	71.168 0.440	11.18 0.059	1.50	7.38	SST CG N
0.42	10.668	S-1050	0.88 22.352	0.296 7.518	73.00 12.775	0.260 6.604	19.000	84.512 0.470	11.94 0.062	1.57	7.50	SST CG N
0.42	10.668	12506	0.88 22.352	0.296 7.518	115.00 20.125	0.164 4.166	18.900	84.067 0.352	8.94 0.063	1.59	5.60	SST CG N
0.42	10.668	71422S	0.88 22.352	0.294 7.468	77.00 13.475	0.245 6.223	18.900	84.067 0.464	11.79 0.063	1.59	7.40	SST CG N
0.42	10.668	71422	0.88 22.352	0.294 7.468	8.077 15.925	0.320 8.128	29.000	128.992 0.470	11.94 0.063	1.60	7.50	MW CG N
0.42	10.668	Q-76	0.88 22.352	0.278 7.061	126.00 22.050	0.210 5.334	26.000	115.648 0.570	14.48 0.071	1.80	8.00	SST CG N
0.42	10.668	Z-96	0.88 22.352	0.276 7.010	122.00 21.350	0.220 5.588	27.000	120.096 0.610	15.49 0.072	1.83	8.50	SST CG N
0.42	10.668	S-1052	0.88 22.352	0.260 6.604	235.00 41.125	0.160 4.064	37.000	164.576 0.600	15.24 0.080	2.03	7.50	SST CG N
0.42	10.668	S-482	0.88 22.352	0.260 6.604	215.00 37.625	0.170 4.318	37.000	164.576 0.640	16.26 0.080	2.03	8.00	SST CG N
0.42	10.668	S-132	0.91 23.114	0.296 7.518	58.00 10.150	0.326 8.280	18.900	84.067 0.575	14.61 0.063	1.59	9.20	SST CG N
0.42	10.668	B2-51	0.91 23.114	0.288 7.315	110.00 19.250	0.230 5.842	24.000	106.752 0.530	13.46 0.067	1.70	8.00	SPR CG N
0.42	10.668	S-833	0.91 23.11									




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.42	10.668	71355S	1.00	25.400	0.330	8.382	17.00	2.975	0.460	11.684	7.800	34.694	0.340	8.64	0.045	1.14	7.63	SST	CG	N
0.42	10.668	71366	1.00	25.400	0.326	8.280	25.00	4.375	0.520	13.208	13.000	57.824	0.350	8.89	0.047	1.19	7.38	MW	CG	N
0.42	10.668	71366S	1.00	25.400	0.326	8.280	21.00	3.675	0.420	10.668	8.800	39.142	0.350	8.89	0.047	1.19	7.38	SST	CG	N
0.42	10.668	71377S	1.00	25.400	0.324	8.230	23.00	4.025	0.387	9.830	8.900	39.587	0.360	9.14	0.048	1.21	7.40	SST	CG	N
0.42	10.668	71377	1.00	25.400	0.324	8.230	27.00	4.725	0.510	12.954	14.000	62.272	0.360	9.14	0.048	1.22	7.50	MW	CG	N
0.42	10.668	Z-18	1.00	25.400	0.322	8.179	23.00	4.025	0.460	11.684	11.000	48.928	0.440	11.18	0.049	1.24	9.00	SPR	CG	Z
0.42	10.668	71390	1.00	25.400	0.318	8.077	33.00	5.775	0.470	11.938	16.000	71.168	0.400	10.16	0.051	1.30	7.88	MW	CG	N
0.42	10.668	71390S	1.00	25.400	0.318	8.077	28.00	4.900	0.380	9.652	11.000	48.928	0.400	10.16	0.051	1.30	7.88	SST	CG	N
0.42	10.668	71401	1.00	25.400	0.310	7.874	45.00	7.875	0.440	11.176	19.000	84.512	0.450	11.43	0.055	1.40	8.13	MW	CG	N
0.42	10.668	71401S	1.00	25.400	0.310	7.874	38.00	6.650	0.350	8.890	13.000	57.824	0.450	11.43	0.055	1.40	8.13	SST	CG	N
0.42	10.668	71412	1.00	25.400	0.302	7.671	59.00	10.325	0.400	10.160	24.000	106.752	0.490	12.45	0.059	1.50	8.25	MW	CG	N
0.42	10.668	71412S	1.00	25.400	0.302	7.671	50.00	8.750	0.320	8.128	16.000	71.168	0.490	12.45	0.059	1.50	8.25	SST	CG	N
0.42	10.668	71423S	1.00	25.400	0.294	7.468	66.00	11.550	0.286	7.264	18.900	84.067	0.520	13.21	0.063	1.59	8.30	SST	CG	N
0.42	10.668	71423	1.00	25.400	0.294	7.468	78.00	13.650	0.370	9.398	29.000	128.992	0.530	13.46	0.063	1.60	8.38	MW	CG	N
0.42	10.668	71431	1.00	25.400	0.286	7.264	103.00	18.025	0.330	8.382	34.000	151.232	0.560	14.22	0.067	1.70	8.38	MW	CG	N
0.42	10.668	71431S	1.00	25.400	0.286	7.264	87.00	15.225	0.270	6.858	23.000	102.304	0.560	14.22	0.067	1.70	8.38	SST	CG	N
0.42	10.668	71438	1.00	25.400	0.276	7.010	139.00	24.325	0.290	7.366	40.000	177.920	0.620	15.75	0.072	1.83	8.63	MW	CG	N
0.42	10.668	71438S	1.00	25.400	0.276	7.010	118.00	20.650	0.230	5.842	27.000	120.096	0.620	15.75	0.072	1.83	8.63	SST	CG	N
0.42	10.668	S-177	1.00	25.400	0.276	7.010	113.00	19.775	0.240	6.096	27.000	120.096	0.650	16.51	0.072	1.83	9.00	SST	CG	N
0.42	10.668	10729	1.03	26.162	0.360	9.144	4.30	0.753	0.840	21.336	3.600	16.013	0.200	5.08	0.030	0.76	6.50	MW	CG	Z
0.42	10.668	3650	1.03	26.162	0.310	7.874	45.00	7.875	0.310	7.874	14.000	62.272	0.500	12.70	0.055	1.40	8.00	SPR	C	Z
0.42	10.668	2543	1.13	28.702	0.356	9.042	3.20	0.560	0.770	19.558	2.500	11.120	0.350	8.89	0.032	0.81	10.00	SPR	C	Z
0.42	10.668	S-52	1.13	28.702	0.310	7.874	25.00	4.375	0.440	11.176	11.000	48.928	0.690	17.53	0.055	1.40	11.50	SST	C	N
0.42	10.668	CC-98	1.19	30.226	0.370	9.398	1.50	0.263	0.950	24.130	1.400	6.227	0.210	5.33	0.025	0.64	7.25	SST	C	N
0.42	10.668	B3-47	1.19	30.226	0.304	7.722	37.00	6.475	0.410	10.414	15.000	66.720	0.580	14.73	0.058	1.47	10.00	SST	CG	N
0.42	10.668	3937	1.19	30.226	0.276	7.010	91.00	15.925	0.320	8.128	29.000	128.992	0.860	21.84	0.072	1.83	12.00	SPR	CG	Z
0.42	10.668	10477	1.22	30.988	0.310	7.874	35.00	6.125	0.400	10.160	14.000	62.272	0.540	13.72	0.055	1.40	9.75	SPR	CG	Z
0.42	10.668	B-99	1.25	31.750	0.382	9.703	0.37	0.065	1.000	25.400	0.390	1.735	0.200	5.08	0.019	0.48	9.75	MW	C	N
0.42	10.668	10589	1.25	31.750	0.378	9.601	0.26	0.046	0.870	22.098	0.220	0.979	0.380	9.65	0.021	0.53	17.00	SST	C	N
0.42	10.668	10094	1.25	31.750	0.352	8.941	3.70	0.648	0.840	21.336	3.100	13.789	0.410	10.41	0.045	1.00	8.66	SST	CG	Z
0.42	10.668	71318	1.25	31.750	0.350	8.890	6.90	1.208	0.800	20.320	5.500	24.464	0.260	6.60	0.035	0.89	7.50	MW	CG	N
0.42	10.668	71318S	1.25	31.750	0.350	8.890	5.80	1.015	0.640	16.256	3.700	16.458	0.260	6.60	0.035	0.89	7.50	SST	CG	N
0.42	10.668	3617	1.25	31.750	0.348	8.839	5.60	0.980	0.760	19.304	4.300	19.126	0.340	8.64	0.036	0.91	9.50	HD	CG	Z
0.42	10.668	10596	1.25	31.750	0.346	8.788	6.30	1.103	0.740	18.796	4.700	20.906	0.350	8.89	0.037	0.94	9.50	SPR	CG	Z
0.42	10.668	71333	1.25	31.750	0.344	8.738	8.50	1.488	0.820	20.828	7.000	31.136	0.320	8.13	0.038	0.97	8.38	MW	CG	N
0.42	10.668	71333S	1.25	31.750	0.344	8.738	7.20	1.260	0.650	16.510	4.700	20.906	0.320	8.13	0.038	0.97	8.38	SST	CG	N
0.42	10.668	71345	1.25	31.750	0.336	8.534	13.00	2.275	0.720	18.288	9.400	41.811	0.350	8.89	0.042	1.07	8.38	MW	CG	N
0.42	10.668	71345S	1.25	31.750	0.336	8.534	11.00	1.925	0.570	14.478	6.400	28.467	0.350	8.89	0.042	1.07	8.38	SST	CG	N
0.42	10.668	71356	1.25	31.750	0.330	8.382	16.00	2.800	0.730	11.764	12.000	53.376	0.410	10.41	0.045	1.14	9.00	MW	CG	N
0.42	10.668	71367	1.25	31.750	0.326	8.280	19.00	3.325	0.690	17.526	13.000	57.824	0.430	10.92	0.047	1.19	9.13	MW	CG	N
0.42	10.668	71367S	1.25	31.750	0.326	8.280	16.00	2.800	0.550	13.970	8.800	39.142	0.430	10.92	0.047	1.19	9.13	SST	CG	N
0.42	10.668	71378S	1.25	31.750	0.324	8.230	18.00	3.150	0.495	12.573	8.900	39.587	0.420	10.67	0.048	1.21	8.80	SST	CG	N
0.42	10.668	71378	1.25	31.750	0.324	8.230	21.00	3.675	0.660	16.764	14.000	62.272	0.430	10.92	0.048	1.22	9.00	MW	CG	N
0.42	10.668	71391	1.25	31.750	0.318	8.077	26.00	4.550	0.600	15.240	16.000	71.168	0.480	12.19	0.051	1.30	9.50	MW	CG	N
0.42	10.668	71391S	1.25	31.750	0.318	8.077	22.00	3.850	0.480	12.192	11.000	48.928	0.480	12.19	0.051	1.30	9.50	SST	CG	N
0.42	10.668	71402	1.25	31.750	0.310	7.874	30.00	5.250	0.440	11.176	13.000	57.824	0.540	13.72	0.055	1.40	9.75	SST	CG	N
0.42	10.668	71402S	1.25	31.750	0.310	7.874	46.00	8.050	0.520	11.208	24.000	106.752	0.590	14.99	0.059	1.50	10.00	MW	CG	N
0.42	10.668	71413	1.25	31.750	0.302	7.671	39.00	6.825	0.410	10.414	16.000	71.168	0.590	14.99	0.059	1.50	10.00	SST	CG	N
0.42	10.668	71424S	1.25	31.750	0.294	7.468	51.00	8.925	0.370	9.398	18.900	84.067	0.637	16.18	0.063	1.59	10.20	SST	CG	N
0.42	10.668	71424	1.25	31.750	0.294	7.468	61.00	10.675	0.480	12.192	29.000	128.992	0.650	16.51	0.063	1.60	10.30	MW	CG	N
0.42	10.668	12240	1.25	31.750	0.290	7.366	63.00	11.025	0.360	9.144	23.000	102.304	0.720	18.29	0.065	1.65	11.00	SPR	CG	Z
0.42	10.668	71432	1.25	31.750	0.286	7.264	80.00	14.000	0.430	10.922	34.000	151.232	0.690	17.53	0.067	1.70	10.30	MW	CG	N
0.42	10.668	71432S	1.25	31.750	0.286	7.264	68.00	11.900	0.340	8.636	23.000	102.304	0.690	17.53	0.067</td					




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
0.42	10.668	71346S	1.50	38.100	0.336	8.534	8.90	1.558	0.710	18.034	6.400	28.467	0.410	10.41	0.042	1.07	9.88	SST	CG	N
0.42	10.668	71357	1.50	38.100	0.330	8.382	13.00	2.275	0.890	22.606	12.000	53.376	0.480	12.19	0.045	1.14	10.60	MW	CG	N
0.42	10.668	71357S	1.50	38.100	0.330	8.382	11.00	1.925	0.710	18.034	7.800	34.694	0.480	12.19	0.045	1.14	10.60	SST	CG	N
0.42	10.668	71368	1.50	38.100	0.326	8.280	16.00	2.800	0.840	21.336	13.000	57.824	0.510	12.95	0.047	1.19	10.80	MW	CG	N
0.42	10.668	71368S	1.50	38.100	0.326	8.280	13.00	2.275	0.670	17.018	8.800	39.142	0.510	12.95	0.047	1.19	10.80	SST	CG	N
0.42	10.668	S-3137	1.50	38.100	0.326	8.280	16.00	2.800	0.570	14.478	8.800	39.142	0.450	11.43	0.047	1.19	9.50	SST	CG	N
0.42	10.668	71379S	1.50	38.100	0.324	8.230	15.00	2.625	0.594	15.088	8.900	39.587	0.485	12.32	0.048	1.21	10.20	SST	CG	N
0.42	10.668	71379	1.50	38.100	0.324	8.230	17.00	2.975	0.810	20.574	14.000	62.272	0.510	12.95	0.048	1.22	10.60	MW	CG	N
0.42	10.668	71392	1.50	38.100	0.318	8.077	21.00	3.675	0.740	18.796	16.000	71.168	0.570	14.48	0.051	1.30	11.10	MW	CG	N
0.42	10.668	71392S	1.50	38.100	0.318	8.077	18.00	3.150	0.590	14.986	11.000	48.928	0.570	14.48	0.051	1.30	11.10	SST	CG	N
0.42	10.668	A16-68	1.50	38.100	0.318	8.077	13.00	2.275	0.620	15.748	7.900	35.139	0.880	22.35	0.051	1.30	17.30	MW	CG	N
0.42	10.668	YY-69	1.50	38.100	0.312	7.925	26.00	4.550	0.510	12.954	13.000	57.824	0.680	17.27	0.054	1.37	11.50	SPR	C	Z
0.42	10.668	71403	1.50	38.100	0.310	7.874	29.00	5.075	0.680	17.272	19.000	84.512	0.630	16.00	0.055	1.40	11.50	MW	CG	N
0.42	10.668	71403S	1.50	38.100	0.310	7.874	24.00	4.200	0.540	13.716	13.000	57.824	0.630	16.00	0.055	1.40	11.50	SST	CG	N
0.42	10.668	71414	1.50	38.100	0.302	7.671	38.00	6.650	0.630	16.002	24.000	106.752	0.690	17.53	0.059	1.50	11.80	MW	CG	N
0.42	10.668	71414S	1.50	38.100	0.302	7.671	32.00	5.600	0.500	12.700	16.000	71.168	0.690	17.53	0.059	1.50	11.80	SST	CG	N
0.42	10.668	CC-82	1.50	38.100	0.300	7.620	32.00	5.600	0.530	13.462	17.000	75.616	0.780	19.81	0.060	1.52	13.00	SST	CG	N
0.42	10.668	71425S	1.50	38.100	0.294	7.468	42.00	7.350	0.450	11.430	18.900	84.067	0.746	18.95	0.063	1.59	12.00	SST	CG	N
0.42	10.668	S-1395	1.50	38.100	0.296	7.518	44.00	7.700	0.429	10.897	18.800	83.622	0.718	18.24	0.063	1.59	11.50	SST	CG	N
0.42	10.668	71425	1.50	38.100	0.294	7.468	50.00	8.750	0.580	14.732	29.000	128.992	0.760	19.30	0.063	1.60	12.00	MW	CG	N
0.42	10.668	71433	1.50	38.100	0.286	7.264	65.00	11.375	0.530	13.462	34.000	151.232	0.810	20.57	0.067	1.70	12.10	MW	CG	N
0.42	10.668	71433S	1.50	38.100	0.286	7.264	55.00	9.625	0.420	10.668	23.000	102.304	0.810	20.57	0.067	1.70	12.10	SST	CG	N
0.42	10.668	71440	1.50	38.100	0.276	7.010	88.00	15.400	0.460	11.684	40.000	177.920	0.890	22.61	0.072	1.83	12.40	MW	CG	N
0.42	10.668	71440S	1.50	38.100	0.276	7.010	75.00	13.125	0.360	9.144	27.000	120.096	0.890	22.61	0.072	1.83	12.40	SST	CG	N
0.42	10.668	S-841	1.56	39.624	0.338	8.585	7.30	1.278	0.820	20.828	5.900	26.243	0.450	11.43	0.041	1.04	11.00	SST	CG	N
0.42	10.668	I-56	1.63	41.402	0.292	7.417	44.00	7.700	0.490	12.446	22.000	97.856	0.900	22.86	0.064	1.63	14.00	SPR	CG	Z
0.42	10.668	11239	1.63	41.402	0.256	6.502	148.00	25.900	0.260	6.604	39.000	173.472	0.980	24.89	0.082	2.08	12.00	SST	CG	N
0.42	10.668	12110	1.75	44.450	0.350	8.890	4.20	0.735	0.950	24.130	4.000	17.792	0.420	10.67	0.035	0.89	11.00	SPR	C	Z
0.42	10.668	71320	1.75	44.450	0.350	8.890	4.90	0.858	1.100	27.940	5.500	24.464	0.340	8.64	0.035	0.89	9.75	MW	CG	N
0.42	10.668	71320S	1.75	44.450	0.350	8.890	4.10	0.718	0.900	22.860	3.700	16.458	0.340	8.64	0.035	0.89	9.75	SST	CG	N
0.42	10.668	71335	1.75	44.450	0.344	8.738	6.30	1.103	1.100	27.940	7.000	31.136	0.400	10.16	0.038	0.97	10.50	MW	CG	N
0.42	10.668	71335S	1.75	44.450	0.344	8.738	5.40	0.945	0.880	22.352	4.700	20.906	0.400	10.16	0.038	0.97	10.50	SST	CG	N
0.42	10.668	71347	1.75	44.450	0.336	8.534	9.20	1.610	1.000	25.400	9.400	41.811	0.460	11.68	0.042	1.07	11.00	MW	CG	N
0.42	10.668	71347S	1.75	44.450	0.336	8.534	7.80	1.365	0.820	20.828	6.400	28.467	0.460	11.68	0.042	1.07	11.00	SST	CG	N
0.42	10.668	71358	1.75	44.450	0.330	8.382	11.00	1.925	1.000	25.400	12.000	53.376	0.530	13.46	0.045	1.14	11.80	MW	CG	N
0.42	10.668	71358S	1.75	44.450	0.330	8.382	9.70	1.698	0.800	20.320	7.800	34.694	0.530	13.46	0.045	1.14	11.80	SST	CG	N
0.42	10.668	71369	1.75	44.450	0.326	8.280	14.00	2.450	0.970	24.638	13.000	57.824	0.560	14.22	0.047	1.19	12.00	MW	CG	N
0.42	10.668	71369S	1.75	44.450	0.326	8.280	11.00	1.925	0.770	19.558	8.800	39.142	0.560	14.22	0.047	1.19	12.00	SST	CG	N
0.42	10.668	71380S	1.75	44.450	0.324	8.230	13.00	2.275	0.685	17.399	8.900	39.587	0.545	13.84	0.048	1.21	11.50	SST	CG	N
0.42	10.668	71380	1.75	44.450	0.324	8.230	15.00	2.625	0.940	23.876	14.000	62.272	0.580	14.73	0.048	1.22	12.00	MW	CG	N
0.42	10.668	3432	1.75	44.450	0.320	8.128	23.00	4.025	0.470	11.938	11.000	48.928	0.490	12.45	0.050	1.27	9.75	SPR	CG	Z
0.42	10.668	71393	1.75	44.450	0.318	8.077	17.00	2.975	0.890	22.606	16.000	71.168	0.670	17.02	0.051	1.30	13.10	MW	CG	N
0.42	10.668	71393S	1.75	44.450	0.318	8.077	15.00	2.625	0.710	18.034	11.000	48.928	0.670	17.02	0.051	1.30	13.10	SST	CG	N
0.42	10.668	71404	1.75	44.450	0.310	7.874	24.00	4.200	0.800	20.320	19.000	84.512	0.720	18.29	0.055	1.40	13.10	MW	CG	N
0.42	10.668	71404S	1.75	44.450	0.310	7.874	21.00	3.675	0.640	16.256	13.000	57.824	0.720	18.29	0.055	1.40	13.10	SST	CG	N
0.42	10.668	71415	1.75	44.450	0.302	7.671	32.00	5.600	0.740	18.796	24.000	106.752	0.800	20.32	0.059	1.50	13.60	MW	CG	N
0.42	10.668	71415S	1.75	44.450	0.302	7.671	27.00	4.725	0.590	14.986	16.000	71.168	0.800	20.32	0.059	1.50	13.60	SST	CG	N
0.42	10.668	71426S	1.75	44.450	0.294	7.468	36.00	6.300	0.524	13.310	18.900	84.067	0.850	21.59	0.063	1.59	13.60	SST	CG	N
0.42	10.668	71426	1.75	44.450	0.294	7.468	42.00	7.350	0.690	17.526	29.000	128.992	0.870	22.10	0.063	1.60	13.90	MW	CG	N
0.42	10.668	71434	1.75	44.450	0.286	7.264	55.00	9.625	0.620	15.748	34.000	151.232	0.940	23.88	0.067	1.70	14.00	MW	CG	N
0.42	10.668	71434S	1.75	44.450	0.286	7.264	47.00	8.225	0.500	12.700	23.000	102.304	0.940	23.88	0.067	1.70	14.00	SST	CG	N
0.42	10.668	71441	1.75	44.450	0.276	7.010	74.00	12.950	0.540	13.716	40.000	177.920	1.040	26.42	0.072	1.83	14.40	MW	CG	N
0.42	10.668	71441S	1.75	44.450	0.276	7.010	63.00	11.0												




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h						
0.42	10.668	71435S	2.00	50.800	0.286	7.264	40.00	7.000	0.580	14.732	23.000	102.304	1.060	26.92	0.067	1.70	15.90	SST CG N
0.42	10.668	71442	2.00	50.800	0.276	7.010	64.00	11.200	0.630	16.002	40.000	177.920	1.170	29.72	0.072	1.83	16.30	MW CG N
0.42	10.668	71442S	2.00	50.800	0.276	7.010	55.00	9.625	0.500	12.700	27.000	120.096	1.170	29.72	0.072	1.83	16.30	SST CG N
0.42	10.668	4374	2.06	52.324	0.276	7.010	62.00	10.850	0.470	11.938	29.000	128.992	1.210	30.73	0.072	1.83	16.80	SPR CG Z
0.42	10.668	71324	2.25	57.150	0.350	8.890	3.80	0.665	1.400	35.560	5.500	24.464	0.420	10.67	0.035	0.89	12.00	MW CG N
0.42	10.668	71324S	2.25	57.150	0.350	8.890	3.20	0.560	1.100	27.940	3.700	16.458	0.420	10.67	0.035	0.89	12.00	SST CG N
0.42	10.668	S-1410	2.25	57.150	0.346	8.788	5.20	0.910	0.850	21.590	4.400	19.571	0.410	10.41	0.037	0.94	10.00	SST C N
0.42	10.668	71337	2.25	57.150	0.344	8.738	5.00	0.875	1.400	35.560	7.000	31.136	0.480	12.19	0.038	0.97	12.80	MW CG N
0.42	10.668	71337S	2.25	57.150	0.344	8.738	4.30	0.753	1.100	27.940	4.700	20.906	0.480	12.19	0.038	0.97	12.80	SST CG N
0.42	10.668	71349	2.25	57.150	0.336	8.534	7.20	1.260	1.300	33.020	9.400	41.811	0.570	14.48	0.042	1.07	13.50	MW CG N
0.42	10.668	71349S	2.25	57.150	0.336	8.534	6.10	1.068	1.000	25.400	6.400	28.467	0.570	14.48	0.042	1.07	13.50	SST CG N
0.42	10.668	71360	2.25	57.150	0.330	8.382	8.70	1.523	1.300	33.020	12.000	53.376	0.670	17.02	0.045	1.14	14.90	MW CG N
0.42	10.668	71360S	2.25	57.150	0.330	8.382	7.40	1.295	1.100	27.940	7.800	34.694	0.670	17.02	0.045	1.14	14.90	SST CG N
0.42	10.668	71383S	2.25	57.150	0.324	8.230	9.40	1.645	0.947	24.054	8.900	39.587	0.717	18.21	0.048	1.21	15.00	SST CG N
0.42	10.668	71383	2.25	57.150	0.324	8.230	11.00	1.925	1.300	33.020	14.000	62.272	0.740	18.80	0.048	1.22	15.40	MW CG N
0.42	10.668	71395	2.25	57.150	0.318	8.077	14.00	2.450	1.100	27.940	16.000	71.168	0.820	20.83	0.051	1.30	16.00	MW CG N
0.42	10.668	71395S	2.25	57.150	0.318	8.077	12.00	2.100	0.900	22.860	11.000	48.928	0.820	20.83	0.051	1.30	16.00	SST CG N
0.42	10.668	71406	2.25	57.150	0.310	7.874	18.00	3.150	1.100	27.940	19.000	84.512	0.920	23.37	0.055	1.40	16.80	MW CG N
0.42	10.668	71406S	2.25	57.150	0.310	7.874	16.00	2.800	0.840	21.336	13.000	57.824	0.920	23.37	0.055	1.40	16.80	SST CG N
0.42	10.668	71417	2.25	57.150	0.302	7.671	25.00	4.375	0.970	24.638	24.000	106.752	1.010	25.65	0.059	1.50	17.10	MW CG N
0.42	10.668	71417S	2.25	57.150	0.302	7.671	21.00	3.675	0.770	19.558	16.000	71.168	1.010	25.65	0.059	1.50	17.10	SST CG N
0.42	10.668	71428S	2.25	57.150	0.294	7.468	27.00	4.725	0.699	17.755	18.900	84.067	1.091	27.71	0.063	1.59	17.50	SST CG N
0.42	10.668	71428	2.25	57.150	0.294	7.468	32.00	5.600	0.900	22.860	29.000	128.992	1.100	27.94	0.063	1.60	17.50	MW CG N
0.42	10.668	71436	2.25	57.150	0.286	7.264	42.00	7.350	0.820	20.828	34.000	151.232	1.180	29.97	0.067	1.70	17.60	MW CG N
0.42	10.668	71436S	2.25	57.150	0.286	7.264	36.00	6.300	0.650	23.000	102.304	1.180	29.97	0.067	1.70	17.60	SST CG N	
0.42	10.668	71443	2.25	57.150	0.276	7.010	57.00	9.975	0.710	18.034	40.000	177.920	1.310	33.27	0.072	1.83	18.30	MW CG N
0.42	10.668	71443S	2.25	57.150	0.276	7.010	48.00	8.400	0.560	14.224	27.000	120.096	1.310	33.27	0.072	1.83	18.30	SST CG N
0.42	10.668	4243	2.38	60.452	0.360	9.144	1.50	0.263	1.900	48.260	2.800	12.454	0.480	12.19	0.030	0.76	15.00	MW C Z
0.42	10.668	10568	2.38	60.452	0.268	6.807	62.00	10.850	0.550	13.970	34.000	151.232	1.590	40.39	0.076	1.93	21.00	SPR CG N
0.42	10.668	10615	2.50	63.500	0.370	9.398	0.62	0.109	2.100	53.340	1.300	5.782	0.400	10.16	0.025	0.64	15.00	SST C N
0.42	10.668	71326	2.50	63.500	0.350	8.890	3.40	0.595	1.600	40.640	5.500	24.464	0.460	11.68	0.035	0.89	13.10	MW CG N
0.42	10.668	71326S	2.50	63.500	0.350	8.890	2.90	0.508	1.300	33.020	3.700	16.458	0.460	11.68	0.035	0.89	13.10	SST CG N
0.42	10.668	71338	2.50	63.500	0.344	8.738	4.50	0.788	1.600	40.640	7.000	31.136	0.530	13.46	0.038	0.97	14.00	MW CG N
0.42	10.668	71338S	2.50	63.500	0.344	8.738	3.80	0.665	1.200	30.480	4.700	20.906	0.530	13.46	0.038	0.97	14.00	SST CG N
0.42	10.668	71350	2.50	63.500	0.336	8.534	6.50	1.138	1.500	38.100	9.400	41.811	0.620	15.75	0.042	1.07	14.90	MW CG N
0.42	10.668	71350S	2.50	63.500	0.336	8.534	5.50	0.963	1.200	30.480	6.400	28.467	0.620	15.75	0.042	1.07	14.90	SST CG N
0.42	10.668	71361	2.50	63.500	0.330	8.382	7.90	1.383	1.500	38.100	12.000	53.376	0.730	18.54	0.045	1.14	16.30	MW CG N
0.42	10.668	71361S	2.50	63.500	0.330	8.382	6.70	1.173	1.200	30.480	7.800	34.694	0.730	18.54	0.045	1.14	16.30	SST CG N
0.42	10.668	71385S	2.50	63.500	0.324	8.230	8.40	1.470	1.060	26.924	8.900	39.587	0.791	20.09	0.048	1.21	16.70	SST CG N
0.42	10.668	71385	2.50	63.500	0.324	8.230	9.90	1.733	1.400	35.560	14.000	62.272	0.820	20.83	0.048	1.22	17.00	MW CG N
0.42	10.668	71396	2.50	63.500	0.318	8.077	12.00	2.100	1.300	33.020	16.000	71.168	0.900	22.86	0.051	1.30	17.60	MW CG N
0.42	10.668	71396S	2.50	63.500	0.318	8.077	10.00	1.750	1.000	25.400	11.000	48.928	0.900	22.86	0.051	1.30	17.60	SST CG N
0.42	10.668	71407	2.50	63.500	0.310	7.874	17.00	2.975	1.200	30.480	19.000	84.512	1.010	25.65	0.055	1.40	18.40	MW CG N
0.42	10.668	71407S	2.50	63.500	0.310	7.874	14.00	2.450	0.940	23.876	13.000	57.824	1.010	25.65	0.055	1.40	18.40	SST CG N
0.42	10.668	71418	2.50	63.500	0.302	7.671	22.00	3.850	1.100	27.940	24.000	106.752	1.110	28.19	0.059	1.50	18.90	MW CG N
0.42	10.668	71418S	2.50	63.500	0.302	7.671	19.00	3.325	0.870	22.098	16.000	71.168	1.110	28.19	0.059	1.50	18.90	SST CG N
0.42	10.668	71429S	2.50	63.500	0.294	7.468	24.00	4.200	0.787	19.990	18.900	84.067	1.212	30.78	0.063	1.59	19.40	SST CG N
0.42	10.668	71429	2.50	63.500	0.294	7.468	29.00	5.075	1.000	25.400	29.000	128.992	1.220	30.99	0.063	1.60	19.40	MW CG N
0.42	10.668	71437	2.50	63.500	0.286	7.264	38.00	6.650	0.910	23.114	34.000	151.232	1.310	33.27	0.067	1.70	19.50	MW CG N
0.42	10.668	71437S	2.50	63.500	0.286	7.264	32.00	5.600	0.730	18.542	23.000	102.304	1.310	33.27	0.067	1.70	19.50	SST CG N
0.42	10.668	71444	2.50	63.500	0.276	7.010	51.00	8.925	0.800	20.320	40.000	177.920	1.450	36.83	0.072	1.83	20.10	MW CG N
0.42	10.668	71444S	2.50	63.500	0.276	7.010	43.00	7.525	0.630	16.002	27.000	120.096	1.450	36.83	0.072	1.83	20.10	SST CG N
0.42	10.668	3634	2.63	66.802	0.284	7.214	35.00	6.125	1.000	25.400	36.000	160.128	1.500	38.10	0.068	1.73	22.00	MW CG Z
0.42	10.668	12147	2.66	67.564	0.340	8.636	4.80	0.840	1.200	30.480	5.900	26.243	0.640	16.26	0.040	1.02	16.00	SPR CG Z
0.42	10.668	A9-51	2.66	67.564	0.338	8.585	4.90	0.858	1.300	33.020	6.300	28.022	0.700	17.78	0.041	1.04	17.00</	




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends C CG Z	Fnsh C CG Z								
0.437	11.100	N-84	0.47	11.938	0.369	9.373	10.00	1.750	0.280	7.112	2.800	12.454	0.190	4.83	0.034	0.86	4.50	SST	C	N
0.437	11.100	FF-60	0.47	11.938	0.337	8.560	45.00	7.875	0.210	5.334	9.600	42.701	0.250	6.35	0.050	1.27	5.00	SST	CG	N
0.437	11.100	WW-68	0.47	11.938	0.313	7.950	133.00	23.275	0.140	3.556	19.000	84.512	0.310	7.87	0.062	1.57	5.00	SPR	CG	Z
0.437	11.100	2659	0.47	11.938	0.311	7.899	143.00	25.025	0.140	3.556	20.000	88.960	0.320	8.13	0.063	1.60	5.00	SPR	CG	Z
0.437	11.100	S-1039	0.47	11.938	0.277	7.036	446.00	78.050	0.080	2.032	35.000	155.680	0.360	9.14	0.080	2.03	4.50	SST	CG	N
0.437	11.100	11219	0.50	12.700	0.411	10.439	0.12	0.021	0.410	10.414	0.050	0.222	0.090	2.29	0.013	0.33	6.00	SST	C	N
0.437	11.100	TT-43	0.50	12.700	0.397	10.084	0.91	0.159	0.380	9.652	0.350	1.557	0.120	3.05	0.020	0.51	5.00	SST	C	N
0.437	11.100	2989	0.50	12.700	0.377	9.576	8.60	1.505	0.350	8.890	3.000	13.344	0.150	3.81	0.030	0.76	4.00	MW	C	Z
0.437	11.100	12661	0.50	12.700	0.377	9.576	7.50	1.313	0.310	7.874	2.400	10.675	0.150	3.81	0.030	0.76	4.00	SST	C	N
0.437	11.100	10250	0.50	12.700	0.367	9.322	15.00	2.625	0.260	6.604	3.800	16.902	0.180	4.57	0.035	0.89	4.25	SPR	C	Z
0.437	11.100	AA-88	0.50	12.700	0.357	9.068	17.00	2.975	0.300	7.620	5.100	22.685	0.200	5.08	0.040	1.02	5.00	SST	CG	N
0.437	11.100	K-25	0.50	12.700	0.355	9.017	28.00	4.900	0.200	5.080	5.700	25.354	0.210	5.33	0.041	1.04	4.00	SST	CG	N
0.437	11.100	S-1557	0.50	12.700	0.337	8.560	54.00	9.450	0.180	4.572	9.600	42.701	0.230	5.84	0.050	1.27	4.50	SST	CG	N
0.437	11.100	B9-21	0.50	12.700	0.287	7.290	274.00	47.950	0.090	2.286	24.000	106.752	0.410	10.41	0.075	1.91	5.50	SPR	CG	N
0.437	11.100	S-3172	0.53	13.462	0.391	9.931	1.40	0.245	0.380	9.652	0.530	2.357	0.150	3.81	0.023	0.58	5.50	SST	C	N
0.437	11.100	B-48	0.53	13.462	0.363	9.220	15.00	2.625	0.310	7.874	4.500	20.016	0.180	4.57	0.037	0.94	5.00	SPR	CG	N
0.437	11.100	4206	0.53	13.462	0.293	7.442	263.00	46.025	0.110	2.794	28.000	124.544	0.360	9.14	0.072	1.83	5.00	SPR	CG	Z
0.437	11.100	11182	0.56	14.224	0.387	9.830	1.60	0.280	0.360	9.144	0.580	2.580	0.200	5.08	0.025	0.64	7.00	MW	C	N
0.437	11.100	3371	0.56	14.224	0.373	9.474	10.00	1.750	0.310	7.874	3.100	13.789	0.170	4.32	0.032	0.81	4.25	HD	C	Z
0.437	11.100	B-88	0.56	14.224	0.327	8.306	70.00	12.250	0.180	4.572	13.000	57.824	0.280	7.11	0.055	1.40	5.00	SST	CG	N
0.437	11.100	2993	0.56	14.224	0.313	7.950	133.00	23.275	0.140	3.556	19.000	84.512	0.310	7.87	0.062	1.57	5.00	SPR	CG	Z
0.437	11.100	4309	0.56	14.224	0.303	7.696	142.00	24.850	0.160	4.064	23.000	102.304	0.400	10.16	0.067	1.70	6.00	SPR	CG	Z
0.437	11.100	4275	0.59	14.986	0.313	7.950	100.00	17.500	0.190	4.826	19.000	84.512	0.370	9.40	0.062	1.57	6.00	SPR	CG	Z
0.437	11.100	S-1063	0.63	16.002	0.381	9.677	5.60	0.980	0.340	8.636	1.900	8.451	0.140	3.56	0.028	0.71	4.00	SST	C	N
0.437	11.100	B11-67	0.63	16.002	0.373	9.474	11.00	1.925	0.270	6.858	3.100	13.789	0.130	3.30	0.032	0.81	4.00	SPR	CG	N
0.437	11.100	S-3062	0.63	16.002	0.373	9.474	9.80	1.715	0.290	7.366	2.800	12.454	0.160	4.06	0.032	0.81	4.00	SST	CG	N
0.437	11.100	A12-6	0.63	16.002	0.359	9.119	18.00	3.150	0.300	7.620	5.200	23.130	0.230	5.84	0.039	0.99	5.00	SPR	C	N
0.437	11.100	2517	0.63	16.002	0.343	8.712	30.00	5.250	0.310	7.874	9.100	40.477	0.280	7.11	0.047	1.19	6.00	SPR	CG	Z
0.437	11.100	JJ-64	0.66	16.764	0.405	10.287	0.28	0.049	0.540	13.716	0.150	0.667	0.120	3.05	0.016	0.41	6.50	MW	C	Z
0.437	11.100	S-897	0.66	16.764	0.385	9.779	2.10	0.368	0.500	12.700	1.000	4.448	0.160	4.06	0.026	0.66	6.00	SST	CG	N
0.437	11.100	A11-48	0.66	16.764	0.345	8.763	33.00	5.775	0.240	6.096	8.000	35.584	0.270	6.86	0.046	1.17	5.00	SST	C	N
0.437	11.100	12513	0.69	17.526	0.337	8.560	48.00	8.400	0.300	7.620	14.000	62.272	0.310	7.87	0.050	1.27	5.25	MW	C	N
0.437	11.100	A11-69	0.69	17.526	0.287	7.290	317.00	55.475	0.100	2.540	31.000	137.888	0.380	9.65	0.075	1.91	5.00	SPR	CG	Z
0.437	11.100	S-128	0.75	19.050	0.397	10.084	0.68	0.119	0.610	15.494	0.420	1.868	0.140	3.56	0.020	0.51	6.00	SST	C	N
0.437	11.100	S-920	0.75	19.050	0.385	9.779	1.60	0.280	0.540	13.716	0.890	3.959	0.210	5.33	0.026	0.66	7.00	SST	CG	N
0.437	11.100	913	0.75	19.050	0.381	9.677	4.30	0.753	0.580	14.732	2.500	11.120	0.170	4.32	0.028	0.71	5.00	MW	C	Z
0.437	11.100	11397	0.75	19.050	0.377	9.576	5.80	1.015	0.570	14.478	3.300	14.678	0.180	4.57	0.030	0.76	5.00	MW	C	Z
0.437	11.100	3977	0.75	19.050	0.367	9.322	9.40	1.645	0.400	10.160	3.800	16.902	0.190	4.83	0.035	0.89	5.50	SPR	CG	Z
0.437	11.100	10795	0.75	19.050	0.367	9.322	7.40	1.295	0.480	12.192	3.600	16.013	0.210	5.33	0.035	0.89	6.00	SST	CG	N
0.437	11.100	S-1031	0.75	19.050	0.361	9.169	12.00	2.100	0.390	9.906	4.600	20.461	0.210	5.33	0.038	0.97	5.50	SST	CG	N
0.437	11.100	3791	0.75	19.050	0.353	8.966	29.00	5.075	0.230	5.842	6.500	28.912	0.230	5.84	0.042	1.07	4.50	SPR	C	Z
0.437	11.100	S-745	0.75	19.050	0.353	8.966	18.00	3.150	0.340	8.636	6.100	27.133	0.270	6.86	0.042	1.07	5.50	SST	C	N
0.437	11.100	10253	0.75	19.050	0.331	8.407	40.00	7.000	0.300	7.620	12.000	53.376	0.420	10.67	0.053	1.35	7.00	SPR	C	Z
0.437	11.100	513	0.75	19.050	0.329	8.357	48.00	8.400	0.270	6.858	13.000	57.824	0.410	10.41	0.054	1.37	6.50	HD	C	Z
0.437	11.100	00-98	0.75	19.050	0.329	8.357	47.00	8.225	0.260	6.604	12.000	53.376	0.320	8.13	0.054	1.37	6.00	SST	CG	N
0.437	11.100	W-34	0.75	19.050	0.329	8.357	36.00	6.300	0.320	8.128	11.000	48.928	0.430	10.92	0.054	1.37	8.00	SPR	CG	Z
0.437	11.100	10592	0.75	19.050	0.327	8.306	47.00	8.225	0.290	7.366	13.000	57.824	0.390	9.91	0.055	1.40	7.00	SPR	CG	N
0.437	11.100	S-404	0.75	19.050	0.311	7.899	93.00	16.275	0.196	4.978	18.200	80.954	0.369	9.37	0.063	1.59	5.90	SST	CG	N
0.437	11.100	A-36	0.75	19.050	0.297	7.544	173.00	30.275	0.150	3.810	26.000	115.648	0.490	12.45	0.070	1.78	6.00	SPR	C	Z
0.437	11.100	10439	0.81	20.574	0.367	9.322	6.00	1.050	0.510	12.954	3.100	13.789	0.300	7.62	0.035	0.89	7.50	SPR	C	Z
0.437	11.100	10870	0.81	20.574	0.361	9.169	13.00	2.275	0.360	9.144	4.900	21.795	0.210	5.33	0.038	0.97	5.50	SPR	CG	N
0.437	11.100	3068	0.81	20.574	0.355	9.017	11.00	1.925	0.440	11.176	4.800	21.350	0.370	9.40	0.041	1.04	8.00	SPR	C	Z
0.437	11.100	F-56	0.81	20.574	0.287	7.290	190.00	33.250	0.170	4.318	31.000	137.888	0.530	13.46	0.075	1.91	7.00	SPR	CG	Z
0.																				




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h						
0.437	11.100	3996	1.00	25.400	0.371	9.423	6.40	1.120	0.520	13.208	3.400	15.123	0.200	5.08	0.033	0.84	6.00	SPR CG Z
0.437	11.100	HH-35	1.00	25.400	0.357	9.068	12.00	2.100	0.460	11.684	5.300	23.574	0.260	6.60	0.040	1.02	6.50	SST CG N
0.437	11.100	S-1059	1.00	25.400	0.357	9.068	8.50	1.488	0.630	16.002	5.300	23.574	0.360	9.14	0.040	1.02	8.00	SST C Z
0.437	11.100	EE-82	1.00	25.400	0.353	8.966	9.00	1.575	0.540	13.716	4.800	21.350	0.460	11.68	0.042	1.07	10.00	SPR C Z
0.437	11.100	S-747	1.00	25.400	0.353	8.966	13.00	2.275	0.490	12.446	6.100	27.133	0.340	8.64	0.042	1.07	7.00	SST C N
0.437	11.100	4151	1.00	25.400	0.345	8.763	16.00	2.800	0.520	13.208	8.500	37.808	0.440	11.18	0.046	1.17	8.50	SPR C Z
0.437	11.100	943	1.00	25.400	0.343	8.712	23.00	4.025	0.390	9.906	9.100	40.477	0.380	9.65	0.047	1.19	7.00	HD C Z
0.437	11.100	12657	1.00	25.400	0.343	8.712	24.00	4.200	0.530	13.462	13.000	57.824	0.330	8.38	0.047	1.19	7.00	MW CG N
0.437	11.100	10936	1.00	25.400	0.327	8.306	34.00	5.950	0.400	10.160	13.000	57.824	0.500	12.70	0.055	1.40	9.00	SPR CG N
0.437	11.100	S-751	1.00	25.400	0.327	8.306	34.00	5.950	0.370	9.398	13.000	57.824	0.500	12.70	0.055	1.40	8.00	SST C N
0.437	11.100	Z-87	1.00	25.400	0.305	7.747	77.00	13.475	0.280	7.112	22.000	97.856	0.530	13.46	0.066	1.68	8.00	SST CG N
0.437	11.100	J-19	1.00	25.400	0.295	7.493	80.00	14.000	0.290	7.366	23.000	102.304	0.710	18.03	0.071	1.80	10.00	SST CG N
0.437	11.100	10312	1.00	25.400	0.293	7.442	132.00	23.100	0.210	5.334	28.000	124.544	0.650	16.51	0.072	1.83	8.00	SPR C Z
0.437	11.100	A9-26	1.03	26.162	0.397	10.084	0.39	0.068	0.810	20.574	0.320	1.423	0.220	5.59	0.020	0.51	10.00	MW C BO
0.437	11.100	B10-31	1.03	26.162	0.355	9.017	8.70	1.523	0.600	15.240	5.200	23.130	0.430	10.92	0.041	1.04	9.50	SPR C N
0.437	11.100	520	1.06	26.924	0.355	9.017	11.00	1.925	0.540	13.716	6.100	27.133	0.360	9.14	0.041	1.04	7.75	HD C
0.437	11.100	Q-41	1.06	26.924	0.347	8.814	14.00	2.450	0.530	13.462	7.500	33.360	0.360	9.14	0.045	1.14	8.00	SST CG N
0.437	11.100	509	1.06	26.924	0.313	7.950	80.00	14.000	0.240	6.096	19.000	84.512	0.500	12.70	0.062	1.57	7.00	HD C Z
0.437	11.100	3454	1.06	26.924	0.313	7.950	53.00	9.275	0.360	9.144	19.000	84.512	0.590	14.99	0.062	1.57	9.50	HD CG Z
0.437	11.100	3534	1.06	26.924	0.311	7.899	78.00	13.650	0.360	9.144	28.000	124.544	0.470	11.94	0.063	1.60	7.50	MW CG Z
0.437	11.100	10862	1.06	26.924	0.295	7.493	110.00	19.250	0.230	5.842	25.000	111.200	0.640	16.26	0.071	1.80	8.00	SST C N
0.437	11.100	10765	1.08	27.432	0.369	9.373	3.60	0.630	0.740	18.796	2.700	12.010	0.340	8.64	0.034	0.86	10.00	SPR CG Z
0.437	11.100	10480	1.09	27.686	0.393	9.982	1.30	0.228	0.950	24.130	1.300	5.782	0.140	3.56	0.022	0.56	5.50	MW C N
0.437	11.100	V-3	1.09	27.686	0.377	9.576	3.10	0.543	0.770	19.558	2.400	10.675	0.240	6.10	0.030	0.76	7.00	SST C N
0.437	11.100	B15-70	1.09	27.686	0.359	9.119	5.30	0.928	0.630	16.002	3.300	14.678	0.470	11.94	0.039	0.99	12.00	SPR CG N
0.437	11.100	S-1164	1.13	28.702	0.377	9.576	3.00	0.525	0.790	20.066	2.400	10.675	0.240	6.10	0.030	0.76	7.00	SST C N
0.437	11.100	10762	1.13	28.702	0.343	8.712	24.00	4.200	0.380	9.652	9.100	40.477	0.330	8.38	0.047	1.19	7.00	SPR CG Z
0.437	11.100	B9-61	1.13	28.702	0.343	8.712	19.00	3.325	0.450	11.430	8.500	37.808	0.400	10.16	0.047	1.19	7.50	SST C N
0.437	11.100	11126	1.13	28.702	0.307	7.798	100.00	17.500	0.220	5.588	22.000	97.856	0.520	13.21	0.065	1.65	7.00	SPR C Z
0.437	11.100	J-60	1.13	28.702	0.293	7.442	105.00	18.375	0.270	6.858	28.000	124.544	0.680	17.27	0.072	1.83	9.50	SPR CG Z
0.437	11.100	12295	1.16	29.464	0.345	8.763	12.00	2.100	0.600	15.240	7.200	32.026	0.550	13.97	0.046	1.17	11.00	SPR C Z
0.437	11.100	3725	1.16	29.464	0.327	8.306	28.00	4.900	0.490	12.446	13.000	57.824	0.580	14.73	0.055	1.40	10.50	SPR CG Z
0.437	11.100	QQ-56	1.19	30.226	0.369	9.373	4.90	0.858	0.880	22.352	4.300	19.126	0.310	7.87	0.034	0.86	8.00	MW C GI
0.437	11.100	S-1467	1.25	31.750	0.355	9.017	10.00	1.750	0.560	14.224	5.700	25.354	0.310	7.87	0.041	1.04	7.50	SST CG N
0.437	11.100	3166	1.25	31.750	0.353	8.966	6.70	1.173	0.670	17.018	4.500	20.016	0.580	14.73	0.042	1.07	12.80	SPR C Z
0.437	11.100	S-748	1.25	31.750	0.353	8.966	9.60	1.680	0.630	16.002	6.100	27.133	0.400	10.16	0.042	1.07	8.50	SST C N
0.437	11.100	10202	1.25	31.750	0.347	8.814	16.00	2.800	0.490	12.446	8.000	35.584	0.360	9.14	0.045	1.14	8.00	SPR CG Z
0.437	11.100	S-409	1.25	31.750	0.343	8.712	7.80	1.365	0.550	13.970	4.300	19.126	0.710	18.03	0.047	1.19	15.00	SST CG N
0.437	11.100	S-1297	1.25	31.750	0.329	8.357	26.00	4.550	0.460	11.684	12.000	53.376	0.500	12.70	0.054	1.37	9.25	SST CG N
0.437	11.100	S-752	1.25	31.750	0.327	8.306	26.00	4.550	0.480	12.192	13.000	57.824	0.590	14.99	0.055	1.40	9.75	SST C N
0.437	11.100	11337	1.25	31.750	0.313	7.950	45.00	7.875	0.405	10.287	18.200	80.954	0.629	15.98	0.063	1.59	10.00	SST CG N
0.437	11.100	N-133	1.25	31.750	0.309	7.849	51.00	8.925	0.410	10.414	21.000	93.408	0.700	17.78	0.064	1.63	11.00	SPR CG Z
0.437	11.100	S-810	1.25	31.750	0.293	7.442	76.00	13.300	0.340	8.636	26.000	115.648	0.790	20.07	0.072	1.83	11.00	SST CG N
0.437	11.100	K-60	1.31	33.274	0.343	8.712	23.00	4.025	0.390	9.906	9.100	40.477	0.330	8.38	0.047	1.19	7.00	SPR CG N
0.437	11.100	3598	1.34	34.036	0.377	9.576	1.40	0.245	0.880	22.352	1.200	5.338	0.470	11.94	0.030	0.76	14.50	MW C Z
0.437	11.100	A13-36	1.34	34.036	0.359	9.119	9.10	1.593	0.580	14.732	5.200	23.130	0.340	8.64	0.039	0.99	7.75	SPR C N
0.437	11.100	1892	1.34	34.036	0.313	7.950	45.00	7.875	0.590	14.986	26.000	115.648	0.680	17.27	0.062	1.57	11.00	MW CG Z
0.437	11.100	12118	1.34	34.036	0.309	7.849	46.00	8.050	0.450	11.430	21.000	93.408	0.770	19.56	0.064	1.63	12.00	SPR CG Z
0.437	11.100	L-47	1.38	35.052	0.337	8.560	15.00	2.625	0.660	16.764	10.000	44.480	0.600	15.24	0.050	1.27	12.00	SPR CG Z
0.437	11.100	4258	1.38	35.052	0.335	8.509	21.00	3.675	0.510	12.954	11.000	48.928	0.560	14.22	0.051	1.30	10.00	SPR C Z
0.437	11.100	10518	1.38	35.052	0.327	8.306	21.00	3.675	0.630	16.002	13.000	57.824	0.720	18.29	0.055	1.40	13.00	SPR CG GI
0.437	11.100	3579	1.38	35.052	0.311	7.899	53.00	9.275	0.530	13.462	28.000	124.544	0.640	16.26	0.063	1.60	10.10	MW CG Z
0.437	11.100	3830	1.38	35.052	0.287	7.290	95.00	16.625	0.330	8.382	31.000	137.888	0.900	22.86	0.075	1.91	12.00	SPR CG GI
0.437	11.100	3184	1.41	35.814	0.373	9.474	1.40	0.245	0.780	19.812	1.100	4.893	0.620	15.75	0.032	0.81	18.50	SPR C Z
0.437	11.100	10495	1.41	35.814	0.343	8.712	9.10	1.593	0.650	16.510	5.900	26.243	0.750	19.05	0.047	1.19	15.00	SPR C Z
0.437	11.100																	




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h								
0.437	11.100	4154	1.75	44.450	0.287	7.290	79.00	13.825	0.400	10.160	31.000	137.888	1.130	28.70	0.075	1.91	14.00	SPR	C	Z
0.437	11.100	10374	1.78	45.212	0.267	6.782	146.00	25.550	0.310	7.874	45.000	200.160	1.170	29.72	0.085	2.16	13.80	SPR	CG	Z
0.437	11.100	10389	1.81	45.974	0.389	9.981	0.82	0.144	1.500	38.100	1.300	5.782	0.270	6.86	0.024	0.61	10.30	MW	C	Z
0.437	11.100	112	1.88	47.752	0.369	9.373	3.10	0.543	1.200	30.480	3.700	16.458	0.430	10.92	0.034	0.86	11.50	HD	C	Z
0.437	11.100	4163	1.88	47.752	0.357	9.068	6.50	1.138	0.870	22.098	5.700	25.354	0.480	12.19	0.040	1.02	11.00	SPR	C	Z
0.437	11.100	KK-78	1.88	47.752	0.217	5.512	860.00	150.500	0.100	2.540	85.000	378.080	0.990	25.15	0.110	2.79	9.00	SPR	CG	Z
0.437	11.100	Q-49	1.94	49.276	0.327	8.306	13.00	2.275	0.850	21.590	11.000	48.928	1.090	27.69	0.055	1.40	19.80	SPR	CG	GI
0.437	11.100	3652	2.00	50.800	0.375	9.525	1.40	0.245	1.500	38.100	2.100	9.341	0.530	13.46	0.031	0.79	16.00	HD	C	Z
0.437	11.100	S-854	2.00	50.800	0.343	8.712	6.60	1.155	1.100	27.940	7.400	32.915	0.870	22.10	0.047	1.19	17.50	SST	C	N
0.437	11.100	16	2.00	50.800	0.329	8.357	16.00	2.800	0.790	20.066	13.000	57.824	0.890	22.61	0.054	1.37	15.50	HD	C	Z
0.437	11.100	S-1154	2.00	50.800	0.329	8.357	14.00	2.450	0.830	21.082	12.000	53.376	0.860	21.84	0.054	1.37	15.00	SST	C	N
0.437	11.100	3553	2.00	50.800	0.323	8.204	15.00	2.625	0.860	21.844	13.000	57.824	1.140	28.96	0.057	1.45	20.00	MW	CG	Z
0.437	11.100	502	2.00	50.800	0.293	7.442	52.00	9.100	0.540	13.716	28.000	124.544	1.310	33.27	0.072	1.83	17.30	HD	C	Z
0.437	11.100	527	2.13	54.102	0.375	9.525	2.30	0.403	1.400	35.560	2.800	12.454	0.410	10.41	0.032	0.81	11.80	HD	C	Z
0.437	11.100	2527	2.13	54.102	0.353	8.966	6.00	1.050	1.100	27.940	6.500	28.912	0.630	16.00	0.042	1.07	14.00	SPR	C	Z
0.437	11.100	4248	2.25	57.150	0.389	9.981	0.48	0.084	1.800	45.720	0.880	3.914	0.410	10.41	0.024	0.61	16.00	MW	C	Z
0.437	11.100	13	2.25	57.150	0.355	9.017	4.90	0.858	1.200	30.480	6.100	27.133	0.670	17.02	0.041	1.04	15.30	HD	C	Z
0.437	11.100	S-840	2.44	61.976	0.297	7.544	33.00	5.775	0.730	18.542	24.000	106.752	1.420	36.07	0.070	1.78	20.30	SST	CG	N
0.437	11.100	2816	2.47	62.738	0.295	7.493	40.00	7.000	0.930	23.622	37.000	164.576	1.440	36.58	0.071	1.80	20.30	MW	CG	Z
0.437	11.100	11334	2.50	63.500	0.341	8.661	8.90	1.558	1.100	27.940	9.700	43.146	0.840	21.34	0.048	1.22	16.50	HD	C	Z
0.437	11.100	11889	2.50	63.500	0.313	7.950	26.00	4.550	0.730	18.542	19.000	84.512	1.090	27.69	0.062	1.57	17.50	SPR	C	Z
0.437	11.100	3728	2.50	63.500	0.277	7.036	66.00	11.550	0.570	14.478	38.000	169.024	1.720	43.69	0.080	2.03	21.50	SPR	CG	Z
0.437	11.100	12452	2.59	65.786	0.341	8.661	7.20	1.260	1.300	33.020	9.700	43.146	0.960	24.38	0.048	1.22	20.00	SPR	CG	N
0.437	11.100	10403	2.75	69.850	0.375	9.525	1.30	0.228	2.200	55.880	2.800	12.454	0.570	14.48	0.031	0.79	17.50	MW	C	Z
0.437	11.100	11968	2.78	70.612	0.325	8.255	13.00	2.275	1.100	27.940	14.000	62.272	1.230	31.24	0.056	1.42	21.00	SPR	C	Z
0.437	11.100	2552	2.88	73.152	0.285	7.239	46.00	8.050	0.700	17.780	33.000	146.784	1.820	46.23	0.076	1.93	24.00	SPR	CG	Z
0.437	11.100	4150	3.00	76.200	0.343	8.712	9.00	1.575	1.000	25.400	9.100	40.477	0.750	19.05	0.047	1.19	15.00	HD	C	Z
0.437	11.100	4152	3.13	79.502	0.313	7.950	22.00	3.850	0.860	21.844	19.000	84.512	1.300	33.02	0.062	1.57	20.00	HD	C	Z
0.437	11.100	3217	3.22	81.788	0.293	7.442	32.00	5.600	0.890	22.606	28.000	124.544	1.940	49.28	0.072	1.83	27.00	SPR	CG	Z
0.437	11.100	10180	3.38	85.852	0.321	8.153	10.00	1.750	1.500	38.100	15.000	66.720	1.860	47.24	0.058	1.47	32.00	SPR	CG	Z
0.437	11.100	2965	3.44	87.376	0.357	9.068	2.30	0.403	2.300	58.420	5.400	24.019	1.120	28.45	0.040	1.02	27.00	MW	C	Z
0.437	11.100	3690	3.44	87.376	0.323	8.204	8.60	1.505	1.500	38.100	13.000	57.824	1.940	49.28	0.057	1.45	34.00	SPR	CG	Z
0.437	11.100	1928	3.75	95.250	0.297	7.544	35.00	6.125	0.740	18.796	26.000	115.648	1.540	39.12	0.070	1.78	22.00	SPR	CG	Z
0.437	11.100	10089	3.75	95.250	0.287	7.290	38.00	6.650	0.830	21.082	31.000	137.888	2.030	51.56	0.075	1.91	27.00	SPR	CG	Z
0.437	11.100	12476	4.25	107.950	0.289	7.341	28.00	4.900	1.100	27.940	30.000	133.440	2.590	65.79	0.074	1.88	34.00	SPR	C	Z
0.437	11.100	12085	5.00	127.000	0.357	9.068	1.80	0.315	3.100	78.740	5.700	25.354	1.360	34.54	0.040	1.02	34.00	SPR	CG	Z
0.437	11.100	10098	5.00	127.000	0.343	8.712	3.40	0.595	2.700	68.580	9.100	40.477	1.790	45.47	0.047	1.19	37.00	SPR	C	Z
0.437	11.100	11490	5.16	131.064	0.341	8.661	3.70	0.648	2.600	66.040	9.700	43.146	1.840	46.74	0.048	1.22	37.30	SPR	C	Z
0.437	11.100	S-1685	6.25	158.750	0.309	7.849	12.00	2.100	1.600	40.640	20.000	88.960	2.320	58.93	0.064	1.63	35.30	SST	C	N
0.437	11.100	1641	8.63	219.202	0.343	8.712	2.40	0.420	5.300	134.620	13.000	57.824	2.420	61.47	0.047	1.19	51.50	MW	CG	GI
0.443	11.252	12795	1.44	36.576	0.347	8.814	10.00	1.750	0.720	18.288	7.400	32.915	0.720	18.29	0.048	1.22	14.00	MW	C	Z
0.447	11.354	A16-65	0.88	22.352	0.329	8.357	92.00	16.100	0.240	6.096	22.000	97.856	0.370	9.40	0.059	1.50	5.25	MW	C	N
0.453	11.506	K-44	0.31	7.874	0.355	9.017	84.00	14.700	0.120	3.048	9.900	44.035	0.170	4.32	0.049	1.24	3.50	SPR	CG	Z
0.453	11.506	B-24	0.34	8.636	0.271	6.883	1843.00	322.525	0.030	0.762	47.000	209.056	0.270	6.86	0.091	2.31	3.00	SST	CG	N
0.453	11.506	S-1538	0.36	9.144	0.341	8.661	52.00	9.100	0.040	1.016	1.900	8.451	0.320	8.13	0.056	1.42	5.75	SST	CG	N
0.453	11.506	10036	0.38	9.652	0.371	9.423	29.00	5.075	0.170	4.318	4.900	21.795	0.210	5.33	0.041	1.04	4.00	SPR	C	Z
0.453	11.506	3768	0.38	9.652	0.339	8.611	163.00	28.525	0.090	2.286	14.000	62.272	0.260	6.60	0.057	1.45	3.50	SPR	C	Z
0.453	11.506	EE-15	0.44	11.176	0.383	9.728	10.00	1.750	0.280	7.112	2.900	12.899	0.160	4.06	0.035	0.89	4.50	SST	CG	N
0.453	11.506	S-272	0.44	11.176	0.379	9.627	22.00	3.850	0.190	4.826	4.100	18.237	0.130	3.30	0.037	0.94	3.50	SST	CG	N
0.453	11.506	EE-67	0.44	11.176	0.333	8.458	136.00	23.800	0.120	3.048	16.000	71.168	0.240	6.10	0.060	1.52	4.00	SST	CG	N
0.453	11.506	00-78	0.44	11.176	0.325	8.255	178.00	31.150	0.110	2.794	19.000	84.512	0.260	6.60	0.064	1.63	4.00	SST	CG	N
0.453	11.506	B-230	0.45	11.430	0.377	9.576	24.00	4.200	0.270	6.858	6.500	28.912	0.180	4.57	0.038	0.97	3.75	MW	C	N
0.453	11.506	B15-8	0.47	11.938	0.329	8.357	118.00	20.650	0.160	4.064	18.000	80.064</td								




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h								
0.453	11.506	M-144	0.78	19.812	0.389	9.881	3.30	0.578	0.510	12.954	1.700	7.562	0.270	6.86	0.032	0.81	7.50	SST	C	N
0.453	11.506	S-1434	0.81	20.574	0.371	9.423	14.00	2.450	0.380	9.652	5.500	24.464	0.230	5.84	0.041	1.04	5.50	SST	CG	N
0.453	11.506	3907	0.81	20.574	0.345	8.763	32.00	5.600	0.330	8.382	10.000	44.480	0.490	12.45	0.054	1.37	8.00	SPR	C	Z
0.453	11.506	H-91	0.88	22.352	0.423	10.744	0.06	0.011	0.640	16.256	0.040	0.178	0.240	6.10	0.015	0.38	15.00	SST	C	N
0.453	11.506	12424	0.88	22.352	0.407	10.338	1.70	0.298	0.740	18.796	1.200	5.338	0.140	3.56	0.023	0.58	5.00	MW	C	GI
0.453	11.506	PP-24	0.88	22.352	0.393	9.982	1.30	0.228	0.460	11.684	0.580	2.580	0.420	10.67	0.030	0.76	14.00	MW	CG	N
0.453	11.506	S-1191	0.88	22.352	0.393	9.982	2.20	0.385	0.610	15.494	1.300	5.782	0.270	6.86	0.030	0.76	8.00	SST	C	N
0.453	11.506	LL-97	0.88	22.352	0.377	9.576	10.00	1.750	0.420	10.668	4.400	19.571	0.250	6.35	0.038	0.97	5.50	SST	C	N
0.453	11.506	10143	0.88	22.352	0.369	9.373	16.00	2.800	0.390	9.906	6.300	28.022	0.250	6.35	0.042	1.07	6.00	SPR	CG	Z
0.453	11.506	QQ-70	0.88	22.352	0.351	8.915	25.00	4.375	0.420	10.668	10.000	44.480	0.410	10.41	0.051	1.30	8.00	SPR	CG	Z
0.453	11.506	A14-45	0.88	22.352	0.343	8.712	39.00	6.825	0.310	7.874	12.000	53.376	0.370	9.40	0.055	1.40	6.75	SST	CG	N
0.453	11.506	10746	0.88	22.352	0.329	8.357	53.00	9.275	0.333	8.458	17.600	78.285	0.503	12.78	0.063	1.59	8.00	SST	CG	N
0.453	11.506	1761	0.91	23.114	0.407	10.338	1.70	0.298	0.770	19.558	1.300	5.782	0.140	3.56	0.023	0.58	5.00	MW	C	Z
0.453	11.506	12417	0.94	23.876	0.407	10.338	1.70	0.298	0.800	20.320	1.300	5.782	0.140	3.56	0.023	0.58	5.00	MW	C	N
0.453	11.506	12435	0.94	23.876	0.405	10.287	2.00	0.350	0.790	20.066	1.600	7.117	0.140	3.56	0.024	0.61	5.00	MW	C	N
0.453	11.506	10194	1.00	25.400	0.419	10.643	0.41	0.072	0.890	22.606	0.370	1.646	0.110	2.79	0.017	0.43	5.50	MW	C	N
0.453	11.506	LL-54	1.00	25.400	0.409	10.389	0.56	0.098	0.770	19.558	0.430	1.913	0.230	5.84	0.022	0.56	9.50	MW	C	Z
0.453	11.506	S-93	1.00	25.400	0.403	10.236	2.10	0.368	0.640	16.256	1.300	5.782	0.130	3.30	0.025	0.64	5.00	SST	CG	N
0.453	11.506	2830	1.00	25.400	0.395	10.033	2.70	0.473	0.770	19.558	2.000	8.896	0.230	5.84	0.029	0.74	7.00	MW	C	Z
0.453	11.506	N-142	1.00	25.400	0.393	9.982	2.20	0.385	0.730	18.542	1.600	7.117	0.270	6.86	0.030	0.76	8.00	SST	C	N
0.453	11.506	10215	1.00	25.400	0.391	9.931	3.90	0.683	0.800	20.320	3.100	13.789	0.200	5.08	0.031	0.79	6.50	MW	CG	GI
0.453	11.506	A14-58	1.00	25.400	0.375	9.525	10.00	1.750	0.460	11.684	4.800	21.350	0.230	5.84	0.039	0.99	6.00	SST	CG	N
0.453	11.506	3765	1.00	25.400	0.373	9.474	6.50	1.138	0.600	15.240	3.900	17.347	0.400	10.16	0.040	1.02	10.00	SPR	CG	Z
0.453	11.506	10085	1.00	25.400	0.371	9.423	14.00	2.450	0.430	10.922	5.900	26.243	0.260	6.60	0.041	1.04	6.25	SPR	CG	GI
0.453	11.506	B1-60	1.00	25.400	0.361	9.169	17.00	2.975	0.460	11.684	7.700	34.250	0.320	8.13	0.046	1.17	7.00	SST	CG	N
0.453	11.506	TT-60	1.00	25.400	0.319	8.103	72.00	12.600	0.320	8.128	23.000	102.304	0.600	15.24	0.067	1.70	9.00	SPR	CG	GI
0.453	11.506	00-16	1.00	25.400	0.293	7.442	168.00	29.400	0.200	5.080	34.000	151.232	0.640	16.26	0.080	2.03	8.00	SST	CG	N
0.453	11.506	A11-46	1.03	26.162	0.369	9.373	12.00	2.100	0.480	12.192	5.900	26.243	0.280	7.11	0.042	1.07	6.75	SST	CG	N
0.453	11.506	A15-51	1.03	26.162	0.343	8.712	36.00	6.300	0.360	9.144	13.000	57.824	0.430	10.92	0.055	1.40	7.75	SPR	CG	GI
0.453	11.506	H-50	1.06	26.924	0.407	10.338	0.66	0.116	0.820	20.828	0.540	2.402	0.240	6.10	0.023	0.58	9.50	MW	C	Z
0.453	11.506	B12-35	1.06	26.924	0.359	9.119	12.00	2.100	0.550	13.970	6.300	28.022	0.520	13.21	0.047	1.19	11.00	SPR	CG	N
0.453	11.506	S-1419	1.13	28.702	0.411	10.439	0.60	0.105	0.960	24.384	0.580	2.580	0.170	4.32	0.021	0.53	7.00	SST	C	N
0.453	11.506	11720	1.13	28.702	0.369	9.373	13.00	2.275	0.490	12.446	6.300	28.022	0.290	7.37	0.042	1.07	7.00	SPR	CG	Z
0.453	11.506	H-34	1.13	28.702	0.341	8.661	35.00	6.125	0.390	9.906	14.000	62.272	0.480	12.19	0.056	1.42	8.50	SPR	CG	GI
0.453	11.506	Z-39	1.19	30.226	0.361	9.169	21.00	3.675	0.370	9.398	7.700	34.250	0.280	7.11	0.046	1.17	6.00	SST	CG	N
0.453	11.506	10346	1.19	30.226	0.345	8.763	15.00	2.625	0.320	8.128	4.800	21.350	0.860	21.84	0.054	1.37	15.00	SPR	C	Z
0.453	11.506	J-22	1.19	30.226	0.345	8.763	19.00	3.325	0.540	13.716	10.000	44.480	0.650	16.51	0.054	1.37	12.00	SPR	CG	N
0.453	11.506	B17-138	1.22	30.988	0.367	9.322	11.00	1.925	0.550	13.970	6.300	28.022	0.320	8.13	0.043	1.09	7.50	SST	CG	N
0.453	11.506	B8-54	1.22	30.988	0.329	8.357	53.00	9.275	0.333	8.458	17.600	78.285	0.560	14.22	0.063	1.59	8.00	SST	C	N
0.453	11.506	S-1278	1.25	31.750	0.363	9.220	13.00	2.275	0.580	14.732	7.200	32.026	0.410	10.41	0.045	1.14	8.00	SST	C	N
0.453	11.506	A11-41	1.25	31.750	0.359	9.119	17.00	2.975	0.500	12.700	8.800	39.142	0.380	9.65	0.047	1.19	8.00	SPR	CG	GI
0.453	11.506	CC-93	1.25	31.750	0.353	8.966	16.00	2.800	0.570	14.478	9.300	41.366	0.480	12.19	0.050	1.27	9.50	SST	CG	N
0.453	11.506	BB-81	1.25	31.750	0.351	8.915	16.00	2.800	0.600	15.240	9.800	43.590	0.510	12.95	0.051	1.30	10.00	SST	CG	N
0.453	11.506	OO-80	1.25	31.750	0.333	8.458	38.00	6.650	0.440	11.176	17.000	75.616	0.600	15.24	0.060	1.52	10.00	SPR	CG	N
0.453	11.506	A14-27	1.25	31.750	0.309	7.849	69.00	12.075	0.370	9.398	25.000	111.200	0.790	20.07	0.072	1.83	11.00	SST	CG	N
0.453	11.506	D-2414	1.28	32.512	0.399	10.135	1.30	0.228	1.000	25.400	1.400	6.227	0.260	6.60	0.027	0.69	8.50	SST	C	N
0.453	11.506	12434	1.28	32.512	0.395	10.033	2.10	0.368	1.000	25.400	2.100	9.341	0.280	7.11	0.029	0.74	8.50	MW	C	N
0.453	11.506	S-1601	1.28	32.512	0.365	9.271	12.00	2.100	0.580	14.732	6.800	30.246	0.400	10.16	0.044	1.12	8.00	SST	C	N
0.453	11.506	WW-42	1.28	32.512	0.273	6.934	263.00	46.025	0.190	4.826	49.000	217.952	0.860	21.84	0.090	2.29	9.50	SPR	CG	Z
0.453	11.506	12651	1.31	33.274	0.407	10.338	0.88	0.154	1.100	27.940	0.990	4.404	0.180	4.57	0.023	0.58	7.00	SST	C	N
0.453	11.506	2849	1.34	34.036	0.405	10.287	0.81	0.142	1.100	27.940	0.880	3.914	0.250	6.35	0.024	0.61	9.50	MW	C	Z
0.453	11.506	S-245	1.38	35.052	0.361	9.169	13.00	2.275	0.580	14.732	7.700	34.250	0.380	9.65	0.046	1.17	8.25	SST	CG	N
0.453	11.506	3640	1.38	35.052	0.345	8.763	26.00	4.550	0.480	12.192	12.000	53.376	0.510	12.95	0.054	1.37	9.50	SPR	CG	Z
0.453																				




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
0.453	11.506	11743	2.00	50.800	0.345	8.763	13.00	2.275	0.960	24.384	12.000	53.376	0.860	21.84	0.054	1.37	15.00	SPR	O	Z
0.453	11.506	10330	2.13	54.102	0.345	8.763	14.00	2.450	0.880	22.352	12.000	53.376	0.910	23.11	0.054	1.37	15.80	SPR	C	Z
0.453	11.506	3798	2.25	57.150	0.269	6.833	219.00	38.325	0.240	6.096	52.000	231.296	1.100	27.94	0.092	2.34	12.00	SPR	CG	Z
0.453	11.506	Z-28	2.34	59.436	0.375	9.525	3.60	0.630	1.400	35.560	5.100	22.685	0.590	14.99	0.039	0.99	15.00	SPR	CG	Z
0.453	11.506	11538	2.47	62.738	0.353	8.966	11.00	1.925	0.900	22.860	9.800	43.590	0.780	19.81	0.050	1.27	14.50	SPR	CG	Z
0.453	11.506	12377	2.50	63.500	0.357	9.068	7.90	1.383	1.200	30.480	9.400	41.811	0.840	21.34	0.048	1.22	16.50	SPR	C	Z
0.453	11.506	V-58	2.50	63.500	0.355	9.017	11.00	1.925	0.890	22.606	9.900	44.035	0.650	16.51	0.049	1.24	13.30	SPR	CG	Z
0.453	11.506	4107	2.50	63.500	0.353	8.966	9.80	1.715	1.000	25.400	9.800	43.590	0.850	21.59	0.050	1.27	16.00	SPR	C	Z
0.453	11.506	2878	2.50	63.500	0.289	7.341	85.00	14.875	0.460	11.684	39.000	173.472	1.390	35.31	0.082	2.08	17.00	SPR	CG	Z
0.453	11.506	3684	2.53	64.262	0.265	6.731	125.00	21.875	0.440	11.176	56.000	249.088	2.010	51.05	0.094	2.39	21.00	SPR	CG	GI
0.453	11.506	W-40	2.63	66.802	0.359	9.119	5.10	0.893	1.600	40.640	8.200	36.474	0.940	23.88	0.047	1.19	20.00	SST	CG	N
0.453	11.506	11817	2.75	69.850	0.363	9.220	4.60	0.805	1.700	43.180	7.700	34.250	0.950	24.13	0.045	1.14	21.00	SPR	CG	Z
0.453	11.506	S-414	2.75	69.850	0.359	9.119	4.80	0.840	1.700	43.180	8.200	36.474	0.990	25.15	0.047	1.19	21.00	SST	CG	N
0.453	11.506	1731	3.00	76.200	0.293	7.442	63.00	11.025	0.810	20.574	51.000	226.848	1.600	40.64	0.080	2.03	20.00	MW	CG	Z
0.453	11.506	11676	3.50	88.900	0.335	8.509	17.00	2.975	0.950	24.130	16.000	71.168	1.180	29.97	0.059	1.50	19.00	SPR	C	Z
0.453	11.506	4172	5.00	127.000	0.285	7.239	38.00	6.650	1.100	27.940	42.000	186.816	3.360	85.34	0.084	2.13	39.00	SPR	C	Z
0.455	11.557	71445	0.50	12.700	0.377	9.576	23.00	4.025	0.310	7.874	7.000	31.136	0.160	4.06	0.039	0.99	4.00	MW	CG	N
0.455	11.557	71445S	0.50	12.700	0.377	9.576	19.00	3.325	0.240	6.096	4.700	20.906	0.160	4.06	0.039	0.99	4.00	SST	CG	N
0.455	11.557	71455	0.50	12.700	0.363	9.220	41.00	7.175	0.280	7.112	11.000	48.928	0.200	5.08	0.046	1.17	4.25	MW	CG	N
0.455	11.557	71455S	0.50	12.700	0.363	9.220	35.00	6.125	0.220	5.588	7.700	34.250	0.200	5.08	0.046	1.17	4.25	SST	CG	N
0.455	11.557	71446	0.63	16.002	0.377	9.576	18.00	3.150	0.390	9.906	7.000	31.136	0.180	4.57	0.039	0.99	4.63	MW	CG	N
0.455	11.557	71446S	0.63	16.002	0.377	9.576	15.00	2.625	0.310	7.874	4.700	20.906	0.180	4.57	0.039	0.99	4.63	SST	CG	N
0.455	11.557	71456	0.63	16.002	0.363	9.220	32.00	5.600	0.360	9.144	11.000	48.928	0.230	5.84	0.046	1.17	5.00	MW	CG	N
0.455	11.557	71456S	0.63	16.002	0.363	9.220	27.00	4.725	0.280	7.112	7.700	34.250	0.230	5.84	0.046	1.17	5.00	SST	CG	N
0.455	11.557	71447	0.75	19.050	0.377	9.576	14.00	2.450	0.490	12.446	7.000	31.136	0.200	5.08	0.039	0.99	5.25	MW	CG	N
0.455	11.557	71447S	0.75	19.050	0.377	9.576	12.00	2.100	0.390	9.906	4.700	20.906	0.200	5.08	0.039	0.99	5.25	SST	CG	N
0.455	11.557	71457	0.75	19.050	0.363	9.220	26.00	4.550	0.440	11.176	11.000	48.928	0.260	6.60	0.046	1.17	5.63	MW	CG	N
0.455	11.557	71457S	0.75	19.050	0.363	9.220	22.00	3.850	0.350	8.890	7.700	34.250	0.260	6.60	0.046	1.17	5.63	SST	CG	N
0.455	11.557	71448	0.88	22.352	0.377	9.576	12.00	2.100	0.580	14.732	7.000	31.136	0.220	5.59	0.039	0.99	5.75	MW	CG	N
0.455	11.557	71448S	0.88	22.352	0.377	9.576	10.00	1.750	0.460	11.684	4.700	20.906	0.220	5.59	0.039	0.99	5.75	SST	CG	N
0.455	11.557	71458	0.88	22.352	0.363	9.220	21.00	3.675	0.530	13.462	11.000	48.928	0.290	7.37	0.046	1.17	6.38	MW	CG	N
0.455	11.557	71458S	0.88	22.352	0.363	9.220	18.00	3.150	0.420	10.668	7.700	34.250	0.290	7.37	0.046	1.17	6.38	SST	CG	N
0.455	11.557	71449	1.00	25.400	0.377	9.576	11.00	1.925	0.660	16.764	7.000	31.136	0.250	6.35	0.039	0.99	6.38	MW	CG	N
0.455	11.557	71449S	1.00	25.400	0.377	9.576	9.00	1.575	0.530	13.462	4.700	20.906	0.250	6.35	0.039	0.99	6.38	SST	CG	N
0.455	11.557	71459	1.00	25.400	0.363	9.220	19.00	3.325	0.610	15.494	11.000	48.928	0.320	8.13	0.046	1.17	7.00	MW	CG	N
0.455	11.557	71459S	1.00	25.400	0.363	9.220	16.00	2.800	0.490	12.446	7.700	34.250	0.320	8.13	0.046	1.17	7.00	SST	CG	N
0.455	11.557	71450	1.25	31.750	0.377	9.576	8.20	1.435	0.850	21.590	7.000	31.136	0.300	7.62	0.039	0.99	7.63	MW	CG	N
0.455	11.557	71450S	1.25	31.750	0.377	9.576	7.00	1.225	0.680	17.272	4.700	20.906	0.300	7.62	0.039	0.99	7.63	SST	CG	N
0.455	11.557	71460	1.25	31.750	0.363	9.220	15.00	2.625	0.780	19.812	11.000	48.928	0.390	9.91	0.046	1.17	8.50	MW	CG	N
0.455	11.557	71460S	1.25	31.750	0.363	9.220	12.00	2.100	0.620	15.748	7.700	34.250	0.390	9.91	0.046	1.17	8.50	SST	CG	N
0.455	11.557	71451	1.50	38.100	0.377	9.576	6.80	1.190	1.000	25.400	7.000	31.136	0.350	8.89	0.039	0.99	8.88	MW	CG	N
0.455	11.557	71451S	1.50	38.100	0.377	9.576	5.70	0.998	0.820	20.828	4.700	20.906	0.350	8.89	0.039	0.99	8.88	SST	CG	N
0.455	11.557	71461	1.50	38.100	0.363	9.220	12.00	2.100	0.950	24.130	11.000	48.928	0.450	11.43	0.046	1.17	9.88	MW	CG	N
0.455	11.557	71461S	1.50	38.100	0.363	9.220	10.00	1.750	0.760	19.304	7.700	34.250	0.450	11.43	0.046	1.17	9.88	SST	CG	N
0.455	11.557	71452	1.75	44.450	0.377	9.576	5.80	1.015	1.200	30.480	7.000	31.136	0.390	9.91	0.039	0.99	10.00	MW	CG	N
0.455	11.557	71452S	1.75	44.450	0.377	9.576	4.90	0.858	0.970	24.638	4.700	20.906	0.390	9.91	0.039	0.99	10.00	SST	CG	N
0.455	11.557	71462	1.75	44.450	0.363	9.220	10.00	1.750	1.100	27.940	11.000	48.928	0.520	13.21	0.046	1.17	11.30	MW	CG	N
0.455	11.557	71462S	1.75	44.450	0.363	9.220	8.70	1.523	0.890	22.606	7.700	34.250	0.520	13.21	0.046	1.17	11.30	SST	CG	N
0.455	11.557	71454	2.00	50.800	0.377	9.576	5.50	0.963	1.300	33.020	7.000	31.136	0.400	10.16	0.039	0.99	10.40	MW	CG	N
0.455	11.557	71454S	2.00	50.800	0.377	9.576	4.70	0.823	1.000	25.400	4.700	20.906	0.400	10.16	0.039	0.99	10.40	SST	CG	N
0.455	11.557	71464	2.00	50.800	0.363	9.220	9.50	1.663	1.200	30.480	11.000	48.928	0.550	13.97	0.046	1.17	11.90	MW	CG	N
0.455	11.557	71464S	2.00	50.800	0.363	9.220	8.10	1.418	0.950	24.130	7.700	34.250	0.550	13.97	0.046	1.17	11.90	SST	CG	N
0.468	11.887	S-864	0.25	6.350	0.378	9.601	69.00	12.075	0.100	2.540	7.000	31.136								




Century Spring

Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h								
0.468	11.887	10800	0.81	20.574	0.422	10.719	0.68	0.119	0.610	15.494	0.410	1.824	0.210	5.33	0.023	0.58	8.00	SST	C	N
0.468	11.887	A11-65	0.81	20.574	0.420	10.668	0.94	0.165	0.620	15.748	0.580	2.580	0.200	5.08	0.024	0.61	7.00	SST	C	N
0.468	11.887	CC-86	0.81	20.574	0.416	10.566	1.80	0.315	0.640	16.256	1.100	4.893	0.180	4.57	0.026	0.66	5.75	SST	C	N
0.468	11.887	S-50	0.81	20.574	0.408	10.363	3.00	0.525	0.630	16.002	1.900	8.451	0.180	4.57	0.030	0.76	6.00	SST	CG	N
0.468	11.887	O-47	0.81	20.574	0.384	9.754	7.20	1.260	0.390	9.906	2.800	12.454	0.420	10.67	0.042	1.07	10.00	SPR	CG	BO
0.468	11.887	A15-33	0.81	20.574	0.374	9.500	21.00	3.675	0.380	9.652	8.000	35.584	0.280	7.11	0.047	1.19	6.00	SST	CG	N
0.468	11.887	1613	0.83	21.082	0.416	10.566	2.50	0.438	0.670	17.018	1.700	7.562	0.160	4.06	0.026	0.66	5.00	MW	C	Z
0.468	11.887	S-473	0.83	21.082	0.406	10.312	3.10	0.543	0.600	15.240	1.800	8.006	0.230	5.84	0.031	0.79	6.50	SST	C	N
0.468	11.887	3643	0.83	21.082	0.384	9.754	12.00	2.100	0.500	12.700	6.100	27.133	0.280	7.11	0.042	1.07	6.75	HD	CG	GI
0.468	11.887	A14-15	0.84	21.336	0.396	10.058	4.60	0.805	0.530	13.462	2.400	10.675	0.320	8.13	0.036	0.91	7.75	SST	C	N
0.468	11.887	3257	0.88	22.352	0.412	10.465	3.00	0.525	0.690	17.526	2.100	9.341	0.180	4.57	0.028	0.71	5.50	MW	C	Z
0.468	11.887	A-75	0.88	22.352	0.356	9.042	29.00	5.075	0.430	10.922	13.000	57.824	0.450	11.43	0.056	1.42	8.00	SST	CG	N
0.468	11.887	K-84	0.88	22.352	0.348	8.839	68.00	11.900	0.220	5.588	15.000	66.720	0.390	9.91	0.060	1.52	5.50	SST	C	N
0.468	11.887	B14-8	0.88	22.352	0.310	7.874	200.00	35.000	0.170	4.318	34.000	151.232	0.530	13.46	0.079	2.01	6.75	SPR	CG	Z
0.468	11.887	11201	0.91	23.114	0.408	10.363	2.70	0.473	0.680	17.272	1.900	8.451	0.230	5.84	0.030	0.76	6.50	SST	C	N
0.468	11.887	12105	0.91	23.114	0.360	9.144	29.00	5.075	0.420	10.668	12.000	53.376	0.430	10.92	0.054	1.37	8.00	SPR	CG	N
0.468	11.887	I-54	0.94	23.876	0.406	10.312	3.20	0.560	0.720	18.288	2.300	10.230	0.220	5.59	0.031	0.79	7.00	MW	CG	Z
0.468	11.887	J-60-A	0.94	23.876	0.404	10.262	4.50	0.788	0.710	18.034	3.200	14.234	0.220	5.59	0.032	0.81	6.00	MW	C	BO
0.468	11.887	10738	0.94	23.876	0.366	9.296	22.00	3.850	0.450	11.430	10.000	44.480	0.410	10.41	0.051	1.30	8.00	SPR	CG	N
0.468	11.887	UU-45	0.94	23.876	0.344	8.738	46.00	8.050	0.372	9.449	17.100	76.061	0.514	13.06	0.063	1.59	8.20	SST	CG	N
0.468	11.887	12324	0.94	23.876	0.342	8.687	57.00	9.975	0.330	8.382	19.000	84.512	0.500	12.70	0.063	1.60	8.00	SPR	CG	Z
0.468	11.887	PP-100	0.94	23.876	0.308	7.823	168.00	29.400	0.210	5.334	36.000	160.128	0.640	16.26	0.080	2.03	8.00	HD	CG	Z
0.468	11.887	10258	0.97	24.638	0.324	8.230	104.00	18.200	0.250	6.350	26.000	115.648	0.580	14.73	0.072	1.83	8.00	SPR	CG	Z
0.468	11.887	3515	0.97	24.638	0.276	7.010	474.00	82.950	0.120	3.048	57.000	253.536	0.670	17.02	0.096	2.44	7.00	SPR	CG	Z
0.468	11.887	1511	1.00	25.400	0.410	10.414	2.20	0.385	0.750	19.050	1.600	7.117	0.250	6.35	0.029	0.74	7.50	MW	C	Z
0.468	11.887	2598	1.00	25.400	0.408	10.363	2.50	0.438	0.750	19.050	1.900	8.451	0.260	6.60	0.030	0.76	7.50	MW	C	Z
0.468	11.887	2934	1.00	25.400	0.408	10.363	3.20	0.560	0.780	19.812	2.500	11.120	0.220	5.59	0.030	0.76	6.25	MW	C	Z
0.468	11.887	S-3144	1.00	25.400	0.394	10.008	7.80	1.365	0.500	12.700	3.900	17.347	0.210	5.33	0.037	0.94	5.75	SST	CG	N
0.468	11.887	S-1344	1.00	25.400	0.386	9.804	10.00	1.750	0.530	13.462	5.300	23.574	0.310	7.87	0.041	1.04	6.50	SST	CG	N
0.468	11.887	3504	1.00	25.400	0.358	9.093	34.00	5.950	0.370	9.398	13.000	57.824	0.410	10.41	0.055	1.40	7.50	SPR	CG	Z
0.468	11.887	S-3079	1.00	25.400	0.344	8.738	46.00	8.050	0.372	9.449	17.100	76.061	0.576	14.63	0.063	1.59	8.20	SST	C	N
0.468	11.887	3708	1.00	25.400	0.338	8.585	71.00	12.425	0.290	7.366	21.000	93.408	0.490	12.45	0.065	1.65	7.50	SPR	CG	Z
0.468	11.887	PP-20	1.00	25.400	0.328	8.331	100.00	17.500	0.240	6.096	24.000	106.752	0.530	13.46	0.070	1.78	7.50	SPR	CG	Z
0.468	11.887	10780	1.03	26.162	0.398	10.109	2.60	0.455	0.650	16.510	1.700	7.562	0.390	9.91	0.035	0.89	11.00	SST	CG	N
0.468	11.887	A11-12	1.06	26.924	0.408	10.363	2.50	0.438	0.850	21.590	2.100	9.341	0.210	5.33	0.030	0.76	7.00	SST	CG	N
0.468	11.887	EE-92	1.06	26.924	0.374	9.500	21.00	3.675	0.410	10.414	8.500	37.808	0.310	7.87	0.047	1.19	6.50	SPR	CG	Z
0.468	11.887	10641	1.06	26.924	0.344	8.738	71.00	12.425	0.250	6.350	18.000	80.064	0.400	10.16	0.062	1.57	6.50	SPR	CG	N
0.468	11.887	3962	1.06	26.924	0.258	6.553	552.00	96.600	0.120	3.048	68.000	302.464	0.810	20.57	0.105	2.67	7.75	SST	CG	N
0.468	11.887	A10-29	1.09	27.686	0.398	10.109	3.10	0.543	0.760	19.304	2.400	10.675	0.330	8.38	0.035	0.89	9.50	SST	CG	N
0.468	11.887	2981	1.09	27.686	0.324	8.230	89.00	15.575	0.300	7.620	26.000	115.648	0.650	16.51	0.072	1.83	9.00	SPR	CG	Z
0.468	11.887	10421	1.11	28.194	0.296	7.518	217.00	37.975	0.200	5.080	44.000	195.712	0.730	18.54	0.086	2.18	8.50	SPR	CG	Z
0.468	11.887	Z-44	1.13	28.702	0.398	10.109	6.60	1.155	0.540	13.716	3.600	16.013	0.250	6.35	0.035	0.89	6.00	SPR	C	Z
0.468	11.887	S-488	1.13	28.702	0.394	10.008	5.90	1.033	0.670	17.018	3.900	17.347	0.300	7.62	0.037	0.94	7.00	SST	C	Z
0.468	11.887	HH-88	1.13	28.702	0.378	9.601	9.70	1.698	0.630	16.002	6.100	27.133	0.500	12.70	0.045	1.14	10.00	SPR	C	Z
0.468	11.887	AA-78	1.13	28.702	0.368	9.347	15.00	2.625	0.580	14.732	8.800	39.142	0.550	13.97	0.050	1.27	10.00	SPR	C	Z
0.468	11.887	3591	1.13	28.702	0.348	8.839	46.00	8.050	0.490	12.446	23.000	102.304	0.480	12.19	0.060	1.52	8.00	MW	CG	Z
0.468	11.887	S-1341	1.13	28.702	0.324	8.230	77.00	13.475	0.320	8.128	25.000	111.200	0.650	16.51	0.072	1.83	9.00	SST	CG	N
0.468	11.887	B-33	1.16	29.464	0.408	10.363	2.30	0.403	0.890	22.606	2.000	8.896	0.270	6.86	0.030	0.76	8.00	MW	C	N
0.468	11.887	11770	1.16	29.464	0.404	10.262	2.30	0.403	0.840	21.336	1.900	8.451	0.320	8.13	0.032	0.81	10.00	SPR	CG	Z
0.468	11.887	Y-56	1.16	29.464	0.338	8.585	52.00	9.100	0.370	9.398	19.000	84.512	0.550	13.97	0.065	1.65	8.50	SST	CG	N
0.468	11.887	11376	1.19	30.226	0.374	9.500	19.00	3.325	0.430	10.922	8.000	35.584	0.310	7.87	0.047	1.19	6.50	SST	CG	N
0.468	11.887	Q-65	1.19	30.226	0.352	8.941	30.00	5.250	0.500	12.700	15.000	66.720	0.580	14.73	0.058	1.47	10.00	SPR	CG	Z
0.468	11.887	2720	1.19	30.226	0.282	7.163	340.00	59.500	0.220	5.588	73.000	324.704	0.740	18.80	0.093	2.36	8.			




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends E F sh									
0.468	11.887	YY-64	1.44	36.576	0.348	8.839	34.00	5.950	0.480	12.192	16.000	71.168	0.600	15.24	0.060	1.52	10.00	SPR	CG	GI
0.468	11.887	S-785	1.47	37.338	0.410	10.414	1.60	0.280	1.200	30.480	1.900	8.451	0.280	7.11	0.029	0.74	8.50	SST	C	N
0.468	11.887	00-93	1.50	38.100	0.418	10.617	0.80	0.140	1.300	33.020	1.000	4.448	0.250	6.35	0.025	0.64	9.00	SST	C	N
0.468	11.887	10887	1.50	38.100	0.408	10.363	1.70	0.298	1.200	30.480	2.000	8.896	0.310	7.87	0.030	0.76	9.25	SST	C	N
0.468	11.887	S-38	1.50	38.100	0.398	10.109	3.30	0.578	1.000	25.400	3.300	14.678	0.350	8.89	0.035	0.89	9.00	SST	C	N
0.468	11.887	B12-69	1.53	38.862	0.348	8.839	27.00	4.725	0.590	14.986	16.000	71.168	0.720	18.29	0.060	1.52	12.00	SPR	CG	N
0.468	11.887	N-41	1.59	40.386	0.324	8.230	54.00	9.450	0.460	11.684	25.000	111.200	0.860	21.84	0.072	1.83	12.00	SST	CG	N
0.468	11.887	10156	1.59	40.386	0.268	6.807	240.00	42.000	0.190	4.826	46.000	204.608	1.400	35.56	0.100	2.54	14.00	SPR	CG	Z
0.468	11.887	11726	1.63	41.402	0.384	9.754	6.40	1.120	0.950	24.130	6.100	27.133	0.460	11.68	0.042	1.07	11.00	SPR	CG	GI
0.468	11.887	B2-44	1.67	42.418	0.370	9.398	11.00	1.925	0.860	21.844	9.600	42.701	0.590	14.99	0.049	1.24	12.00	SPR	CG	N
0.468	11.887	10951	1.69	42.926	0.388	9.855	8.20	1.435	0.650	16.510	5.300	23.574	0.350	8.89	0.040	1.02	7.75	SPR	C	Z
0.468	11.887	12484	1.75	44.450	0.388	9.855	4.50	0.788	1.200	30.480	5.300	23.574	0.540	13.72	0.040	1.02	12.50	SPR	C	Z
0.468	11.887	S-994	1.75	44.450	0.334	8.484	31.00	5.425	0.680	17.272	21.000	93.408	1.050	26.67	0.067	1.70	14.80	SST	C	N
0.468	11.887	1893	1.75	44.450	0.318	8.077	68.00	11.900	0.610	15.494	41.000	182.368	0.980	24.89	0.075	1.91	13.00	MW	CG	GI
0.468	11.887	3554	1.75	44.450	0.248	6.299	417.00	72.975	0.270	6.858	113.000	502.624	1.430	36.32	0.110	2.79	13.00	MW	CG	Z
0.468	11.887	S-65	1.78	45.212	0.322	8.179	59.00	10.325	0.425	10.795	25.000	111.200	0.876	22.25	0.072	1.83	11.20	SST	C	N
0.468	11.887	S-918	1.81	45.974	0.398	10.109	3.30	0.578	1.000	25.400	3.300	14.678	0.350	8.89	0.035	0.89	9.00	SST	C	N
0.468	11.887	RR-37	1.81	45.974	0.324	8.230	57.00	9.975	0.650	16.510	37.000	164.576	0.940	23.88	0.072	1.83	13.00	MW	CG	Z
0.468	11.887	3714	1.94	49.276	0.388	9.855	4.70	0.823	1.100	27.940	5.300	23.574	0.480	12.19	0.040	1.02	12.00	SPR	CG	Z
0.468	11.887	A15-61	1.94	49.276	0.376	9.550	8.70	1.523	0.860	21.844	7.500	33.360	0.490	12.45	0.046	1.17	10.80	SST	CG	N
0.468	11.887	RR-62	2.00	50.800	0.418	10.617	0.51	0.089	1.700	43.180	0.840	3.736	0.350	8.89	0.025	0.64	13.00	SST	C	N
0.468	11.887	S-1404	2.00	50.800	0.378	9.601	5.10	0.893	1.300	33.020	6.500	28.912	0.730	18.54	0.045	1.14	15.30	SST	C	N
0.468	11.887	3573	2.00	50.800	0.372	9.449	9.40	1.645	1.300	33.020	13.000	57.824	0.620	15.75	0.048	1.22	13.00	MW	CG	Z
0.468	11.887	KK-34	2.00	50.800	0.348	8.839	20.00	3.500	0.760	19.304	15.000	66.720	0.840	21.34	0.060	1.52	14.00	SST	CG	N
0.468	11.887	2852	2.00	50.800	0.340	8.636	37.00	6.475	0.750	19.050	27.000	120.096	0.770	19.56	0.064	1.63	12.00	MW	CG	Z
0.468	11.887	10923	2.06	52.324	0.334	8.484	45.00	7.875	0.500	12.700	22.000	97.856	0.870	22.10	0.067	1.70	12.00	SPR	C	Z
0.468	11.887	4300	2.13	54.102	0.360	9.144	13.00	2.275	0.940	23.876	12.000	53.376	0.890	22.61	0.054	1.37	15.50	SPR	C	Z
0.468	11.887	S-1104	2.13	54.102	0.268	6.807	201.00	35.175	0.300	7.620	60.000	266.880	1.450	36.83	0.100	2.54	14.50	SST	CG	N
0.468	11.887	3225	2.34	59.436	0.308	7.823	64.00	11.200	0.550	13.970	36.000	160.128	1.410	35.81	0.080	2.03	17.80	SPR	CG	Z
0.468	11.887	10062	2.50	63.500	0.388	9.855	3.20	0.560	1.600	40.640	5.300	23.574	0.660	16.76	0.040	1.02	16.50	SPR	CG	Z
0.468	11.887	12	2.50	63.500	0.360	9.144	11.00	1.925	1.100	27.940	12.000	53.376	1.040	26.42	0.054	1.37	18.30	HD	C	Z
0.468	11.887	3693	2.50	63.500	0.342	8.687	24.00	4.200	0.770	19.558	19.000	84.512	1.070	27.18	0.063	1.60	16.00	SPR	C	Z
0.468	11.887	S-1536	2.56	65.024	0.360	9.144	7.50	1.313	1.400	35.560	10.000	44.480	1.190	30.23	0.054	1.37	22.00	SST	CG	N
0.468	11.887	NN-91	2.63	66.802	0.396	10.058	2.00	0.350	1.800	45.720	3.600	16.013	0.580	14.73	0.036	0.91	15.00	SST	C	N
0.468	11.887	S-1153	2.63	66.802	0.388	9.855	2.40	0.420	1.800	45.720	4.400	19.571	0.800	20.32	0.040	1.02	19.00	SST	C	N
0.468	11.887	3014	2.88	73.152	0.318	8.077	37.00	6.475	0.790	20.066	30.000	133.440	1.650	41.91	0.075	1.91	22.00	SPR	CG	Z
0.468	11.887	S-496	3.06	77.724	0.374	9.500	3.80	0.665	2.000	50.800	7.400	32.915	1.100	27.94	0.047	1.19	23.50	SST	CG	N
0.468	11.887	2818	3.06	77.724	0.338	8.585	25.00	4.375	0.840	21.336	21.000	93.408	1.240	31.50	0.065	1.65	18.00	SPR	C	Z
0.468	11.887	4210	3.50	88.900	0.366	9.296	8.30	1.453	1.200	30.480	10.000	44.480	0.980	24.89	0.051	1.30	18.30	SPR	C	Z
0.468	11.887	11522	3.50	88.900	0.344	8.738	17.00	2.975	1.100	27.940	18.000	80.064	1.360	34.54	0.062	1.57	21.00	SPR	CG	GI
0.468	11.887	11893	3.50	88.900	0.326	8.280	30.00	5.250	0.800	20.320	24.000	106.752	1.380	35.05	0.071	1.80	19.50	SST	CG	N
0.468	11.887	S-242	3.50	88.900	0.308	7.823	33.00	5.775	1.000	25.400	33.000	146.784	2.280	57.91	0.080	2.03	28.50	SST	CG	N
0.468	11.887	11822	4.94	125.476	0.360	9.144	4.90	0.858	2.400	60.960	12.000	53.376	2.050	52.07	0.054	1.37	37.00	SPR	C	Z
0.468	11.887	1571	8.00	203.200	0.348	8.839	6.20	1.085	2.600	66.040	16.000	71.168	2.850	72.39	0.060	1.52	46.50	SPR	C	Z
0.468	11.887	12243	10.30	261.620	0.360	9.144	2.30	0.403	5.200	132.080	12.000	53.376	4.160	105.66	0.054	1.37	77.00	SPR	CG	Z
0.48	12.192	71465	0.50	12.700	0.410	10.414	16.00	2.800	0.310	7.874	4.800	21.350	0.120	3.05	0.035	0.89	3.50	MW	CG	N
0.48	12.192	71465S	0.50	12.700	0.410	10.414	13.00	2.275	0.240	6.096	3.300	14.678	0.120	3.05	0.035	0.89	3.50	SST	CG	N
0.48	12.192	71476	0.50	12.700	0.404	10.262	20.00	3.500	0.310	7.874	6.200	27.578	0.140	3.56	0.038	0.97	3.75	MW	CG	N
0.48	12.192	71490	0.50	12.700	0.396	10.058	24.00	4.200	0.240	6.096	5.600	24.909	0.160	4.06	0.042	1.07	3.88	MW	CG	N
0.48	12.192	71490S	0.50	12.700	0.390	9.906	35.00	6.125	0.290	7.366	10.000	44.480	0.180	4.57	0.045	1.14	4.00	MW	CG	N
0.48	12.192	71504	0.50	12.700	0.390	9.906	30.00	5.250	0.230	5.842	6.900	30.691	0.180	4.57	0.045	1.14	4.00	SST	CG	N
0.48	12.192	71504S	0.50	12.700	0.346	8.788	153.00	26.775	0.140	3.556	21.000	93.408	0.280	7.11	0.067	1.70	4.25	SST	CG	N
0.48	12.192	71518	0.50	12.700	0.378	9.601	59.00	10.325	0.230	5.842										




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.48	12.192	71533S	0.63	16.002	0.370	9.398	48.00	8.400	0.240	6.096	12.000	53.376	0.280	7.11	0.055	1.40	5.00	SST	CG	N
0.48	12.192	71547	0.63	16.002	0.362	9.195	78.00	13.650	0.270	6.858	21.000	93.408	0.300	7.62	0.059	1.50	5.00	MW	CG	N
0.48	12.192	71547S	0.63	16.002	0.362	9.195	67.00	11.725	0.210	5.334	14.000	62.272	0.300	7.62	0.059	1.50	5.00	SST	CG	N
0.48	12.192	71561S	0.63	16.002	0.354	8.992	81.00	14.175	0.201	5.105	16.700	74.282	0.327	8.31	0.063	1.59	5.20	SST	CG	N
0.48	12.192	71561	0.63	16.002	0.354	8.992	95.00	16.625	0.270	6.858	25.000	111.200	0.330	8.38	0.063	1.60	5.25	MW	CG	N
0.48	12.192	71576	0.63	16.002	0.346	8.788	135.00	23.625	0.230	5.842	30.000	133.440	0.340	8.64	0.067	1.70	5.00	MW	CG	N
0.48	12.192	71576S	0.63	16.002	0.346	8.788	114.00	19.950	0.180	4.572	21.000	93.408	0.340	8.64	0.067	1.70	5.00	SST	CG	N
0.48	12.192	71589	0.63	16.002	0.336	8.534	191.00	33.425	0.190	4.826	36.000	160.128	0.360	9.14	0.072	1.83	5.00	MW	CG	N
0.48	12.192	71589S	0.63	16.002	0.336	8.534	163.00	28.525	0.150	3.810	24.000	106.752	0.360	9.14	0.072	1.83	5.00	SST	CG	N
0.48	12.192	71604	0.63	16.002	0.332	8.433	216.00	37.800	0.180	4.572	39.000	173.472	0.370	9.40	0.074	1.88	5.00	MW	CG	N
0.48	12.192	71604S	0.63	16.002	0.332	8.433	183.00	32.025	0.140	3.556	26.000	115.648	0.370	9.40	0.074	1.88	5.00	SST	CG	N
0.48	12.192	71619	0.63	16.002	0.318	8.077	330.00	57.750	0.150	3.810	50.000	222.400	0.410	10.41	0.081	2.06	5.00	MW	CG	N
0.48	12.192	71619S	0.63	16.002	0.318	8.077	280.00	49.000	0.124	3.150	35.000	155.680	0.427	10.85	0.082	2.08	5.20	SST	CG	N
0.48	12.192	72785	0.66	16.764	0.386	9.804	35.00	6.125	0.330	8.382	12.000	53.376	0.210	5.33	0.047	1.19	4.50	MW	CG	Z
0.48	12.192	72746	0.73	18.542	0.392	9.957	14.00	2.450	0.400	10.160	5.800	25.798	0.330	8.38	0.044	1.12	6.50	SPR	C	N
0.48	12.192	71467	0.75	19.050	0.410	10.414	9.90	1.733	0.490	12.446	4.800	21.350	0.160	4.06	0.035	0.89	4.50	MW	CG	N
0.48	12.192	71467S	0.75	19.050	0.410	10.414	8.40	1.470	0.390	9.906	3.300	14.678	0.160	4.06	0.035	0.89	4.50	SST	CG	N
0.48	12.192	71478	0.75	19.050	0.404	10.262	13.00	2.275	0.490	12.446	6.200	27.578	0.180	4.57	0.038	0.97	4.75	MW	CG	N
0.48	12.192	71478S	0.75	19.050	0.404	10.262	11.00	1.925	0.390	9.906	4.200	18.682	0.180	4.57	0.038	0.97	4.75	SST	CG	N
0.48	12.192	71492	0.75	19.050	0.396	10.058	18.00	3.150	0.460	11.684	8.300	36.918	0.210	5.33	0.042	1.07	5.00	MW	CG	N
0.48	12.192	71492S	0.75	19.050	0.396	10.058	15.00	2.625	0.370	9.398	5.600	24.909	0.210	5.33	0.042	1.07	5.00	SST	CG	N
0.48	12.192	71506	0.75	19.050	0.390	9.906	22.00	3.850	0.460	11.684	10.000	44.480	0.240	6.10	0.045	1.14	5.25	MW	CG	N
0.48	12.192	71506S	0.75	19.050	0.390	9.906	19.00	3.325	0.370	9.398	6.900	30.691	0.240	6.10	0.045	1.14	5.25	SST	CG	N
0.48	12.192	71520	0.75	19.050	0.378	9.601	37.00	6.475	0.370	9.398	14.000	62.272	0.270	6.86	0.051	1.30	5.25	MW	CG	N
0.48	12.192	71520S	0.75	19.050	0.378	9.601	32.00	5.600	0.290	7.366	9.300	41.366	0.270	6.86	0.051	1.30	5.25	SST	CG	N
0.48	12.192	71534	0.75	19.050	0.370	9.398	47.00	8.225	0.360	9.144	17.000	75.616	0.310	7.87	0.055	1.40	5.63	MW	CG	N
0.48	12.192	71534S	0.75	19.050	0.370	9.398	40.00	7.000	0.290	7.366	12.000	53.376	0.310	7.87	0.055	1.40	5.63	SST	CG	N
0.48	12.192	71548	0.75	19.050	0.362	9.195	63.00	11.025	0.330	8.382	21.000	93.408	0.340	8.64	0.059	1.50	5.75	MW	CG	N
0.48	12.192	71548S	0.75	19.050	0.362	9.195	53.00	9.275	0.270	6.858	14.000	62.272	0.340	8.64	0.059	1.50	5.75	SST	CG	N
0.48	12.192	71562	0.75	19.050	0.354	8.992	78.00	13.650	0.330	8.382	25.000	111.200	0.380	9.65	0.063	1.60	6.00	MW	CG	N
0.48	12.192	71562S	0.75	19.050	0.354	8.992	66.00	11.550	0.260	6.604	17.000	75.616	0.380	9.65	0.063	1.60	6.00	SST	CG	N
0.48	12.192	71577	0.75	19.050	0.346	8.788	107.00	18.725	0.290	7.366	30.000	133.440	0.390	9.91	0.067	1.70	5.88	MW	CG	N
0.48	12.192	71577S	0.75	19.050	0.346	8.788	91.00	15.925	0.230	5.842	21.000	93.408	0.390	9.91	0.067	1.70	5.88	SST	CG	N
0.48	12.192	71590	0.75	19.050	0.336	8.534	150.00	26.250	0.240	6.096	36.000	160.128	0.410	10.41	0.072	1.83	5.75	MW	CG	N
0.48	12.192	71590S	0.75	19.050	0.336	8.534	128.00	22.400	0.190	4.826	24.000	106.752	0.410	10.41	0.072	1.83	5.75	SST	CG	N
0.48	12.192	71605	0.75	19.050	0.332	8.433	169.00	29.575	0.230	5.842	39.000	173.472	0.430	10.92	0.074	1.88	5.75	MW	CG	N
0.48	12.192	71605S	0.75	19.050	0.332	8.433	144.00	25.200	0.180	4.572	26.000	115.648	0.430	10.92	0.074	1.88	5.75	SST	CG	N
0.48	12.192	71620	0.75	19.050	0.318	8.077	257.00	44.975	0.200	5.080	50.000	222.400	0.470	11.94	0.081	2.06	5.75	MW	CG	N
0.48	12.192	71620S	0.75	19.050	0.318	8.077	218.00	38.150	0.159	4.039	35.000	155.680	0.501	12.73	0.082	2.08	5.10	SST	CG	N
0.48	12.192	71468	0.88	22.352	0.410	10.414	8.30	1.453	0.580	14.732	4.800	21.350	0.180	4.57	0.035	0.89	5.00	MW	CG	N
0.48	12.192	71468S	0.88	22.352	0.410	10.414	7.10	1.243	0.460	11.684	3.300	14.678	0.180	4.57	0.035	0.89	5.00	SST	CG	N
0.48	12.192	71479	0.88	22.352	0.404	10.262	11.00	1.925	0.590	14.986	6.200	27.578	0.200	5.08	0.038	0.97	5.25	MW	CG	N
0.48	12.192	71479S	0.88	22.352	0.404	10.262	8.90	1.558	0.470	11.938	4.200	18.682	0.200	5.08	0.038	0.97	5.25	SST	CG	N
0.48	12.192	71493	0.88	22.352	0.396	10.058	15.00	2.625	0.550	13.970	8.300	36.918	0.230	5.84	0.042	1.07	5.50	MW	CG	N
0.48	12.192	71493S	0.88	22.352	0.396	10.058	13.00	2.275	0.440	11.176	5.600	24.909	0.230	5.84	0.042	1.07	5.50	SST	CG	N
0.48	12.192	71507	0.88	22.352	0.390	9.906	19.00	3.325	0.530	13.462	10.000	44.480	0.260	6.60	0.045	1.14	5.75	MW	CG	N
0.48	12.192	71507S	0.88	22.352	0.390	9.906	16.00	2.800	0.420	10.668	6.900	30.691	0.260	6.60	0.045	1.14	5.75	SST	CG	N
0.48	12.192	71521	0.88	22.352	0.378	9.601	30.00	5.250	0.450	11.430	14.000	62.272	0.310	7.87	0.051	1.30	6.00	MW	CG	N
0.48	12.192	71521S	0.88	22.352	0.378	9.601	26.00	4.550	0.360	9.144	9.300	41.366	0.310	7.87	0.051	1.30	6.00	SST	CG	N
0.48	12.192	71535	0.88	22.352	0.370	9.398	38.00	6.650	0.450	11.430	17.000	75.616	0.360	9.14	0.055	1.40	6.50	MW	CG	N
0.48	12.192	71535S	0.88	22.352	0.370	9.398	32.00	5.600	0.360	9.144	12.000	53.376	0.360	9.14	0.055	1.40	6.50	SST	CG	N
0.48	12.192	71549	0.88	22.352	0.362	9.195	51.00	8.925	0.410	10.414	21.000	93.408	0.390	9.91	0.059	1.50	6.63	MW	CG	N
0.48	12.192	71549S	0.88	22.352	0.362	9.195	43.00	7.525	0.330	8.382	14.000	62.272	0.390	9.91						




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh								
0.48	12.192	71579S	1.00	25.400	0.346	8.788	65.00	11.375	0.320	8.128	21.000	93.408	0.490	12.45	0.067	1.70	7.38	SST	CG	N
0.48	12.192	71592	1.00	25.400	0.336	8.534	106.00	18.550	0.340	8.636	36.000	160.128	0.530	13.46	0.072	1.83	7.38	MW	CG	N
0.48	12.192	71592S	1.00	25.400	0.336	8.534	90.00	15.750	0.270	6.858	24.000	106.752	0.530	13.46	0.072	1.83	7.38	SST	CG	N
0.48	12.192	71607	1.00	25.400	0.332	8.433	119.00	20.825	0.330	8.382	39.000	173.472	0.550	13.97	0.074	1.88	7.38	MW	CG	N
0.48	12.192	71607S	1.00	25.400	0.332	8.433	101.00	17.675	0.260	6.604	26.000	115.648	0.550	13.97	0.074	1.88	7.38	SST	CG	N
0.48	12.192	71622	1.00	25.400	0.318	8.077	180.00	31.500	0.280	7.112	50.000	222.400	0.600	15.24	0.081	2.06	7.38	MW	CG	N
0.48	12.192	71622S	1.00	25.400	0.318	8.077	153.00	26.775	0.227	5.766	35.000	155.680	0.644	16.36	0.082	2.08	7.90	SST	CG	N
0.48	12.192	71470	1.25	31.750	0.410	10.414	5.70	0.998	0.850	21.590	4.800	21.350	0.220	5.59	0.035	0.89	6.25	MW	CG	N
0.48	12.192	71470S	1.25	31.750	0.410	10.414	4.80	0.840	0.670	17.018	3.300	14.678	0.220	5.59	0.035	0.89	6.25	SST	CG	N
0.48	12.192	71481	1.25	31.750	0.404	10.262	7.50	1.313	0.820	20.828	6.200	27.578	0.250	6.35	0.038	0.97	6.63	MW	CG	N
0.48	12.192	71481S	1.25	31.750	0.404	10.262	6.40	1.120	0.650	16.510	4.200	18.682	0.250	6.35	0.038	0.97	6.63	SST	CG	N
0.48	12.192	71495	1.25	31.750	0.396	10.058	10.00	1.750	0.830	21.082	8.300	36.918	0.310	7.87	0.042	1.07	7.38	MW	CG	N
0.48	12.192	71495S	1.25	31.750	0.396	10.058	8.50	1.488	0.660	16.764	5.600	24.909	0.310	7.87	0.042	1.07	7.38	SST	CG	N
0.48	12.192	71509	1.25	31.750	0.390	9.906	13.00	2.275	0.780	19.812	10.000	44.480	0.340	8.64	0.045	1.14	7.50	MW	CG	N
0.48	12.192	71509S	1.25	31.750	0.390	9.906	11.00	1.925	0.620	15.748	6.900	30.691	0.340	8.64	0.045	1.14	7.50	SST	CG	N
0.48	12.192	71523	1.25	31.750	0.378	9.601	20.00	3.500	0.670	17.018	14.000	62.272	0.410	10.41	0.051	1.30	8.00	MW	CG	N
0.48	12.192	71523S	1.25	31.750	0.378	9.601	17.00	2.975	0.540	13.716	9.300	41.366	0.410	10.41	0.051	1.30	8.00	SST	CG	N
0.48	12.192	71537	1.25	31.750	0.370	9.398	27.00	4.725	0.630	16.002	17.000	75.616	0.460	11.68	0.055	1.40	8.38	MW	CG	N
0.48	12.192	71537S	1.25	31.750	0.370	9.398	23.00	4.025	0.510	12.954	12.000	53.376	0.460	11.68	0.055	1.40	8.38	SST	CG	N
0.48	12.192	71551	1.25	31.750	0.362	9.195	35.00	6.125	0.600	15.240	21.000	93.408	0.510	12.95	0.059	1.50	8.63	MW	CG	N
0.48	12.192	71551S	1.25	31.750	0.362	9.195	30.00	5.250	0.480	12.192	14.000	62.272	0.510	12.95	0.059	1.50	8.63	SST	CG	N
0.48	12.192	71565	1.25	31.750	0.354	8.992	38.00	6.650	0.440	11.176	16.700	74.282	0.556	14.12	0.063	1.59	8.90	SST	CG	N
0.48	12.192	71565S	1.25	31.750	0.354	8.992	45.00	7.875	0.570	14.478	25.000	111.200	0.570	14.48	0.063	1.60	9.00	MW	CG	N
0.48	12.192	71580	1.25	31.750	0.346	8.788	59.00	10.325	0.520	13.208	30.000	133.440	0.600	15.24	0.067	1.70	9.00	SST	CG	N
0.48	12.192	71580S	1.25	31.750	0.346	8.788	50.00	8.750	0.420	10.668	21.000	93.408	0.600	15.24	0.067	1.70	9.00	SST	CG	N
0.48	12.192	71593	1.25	31.750	0.336	8.534	82.00	14.350	0.440	11.176	36.000	160.128	0.640	16.26	0.072	1.83	8.88	MW	CG	N
0.48	12.192	71593S	1.25	31.750	0.336	8.534	70.00	12.250	0.340	8.636	24.000	106.752	0.640	16.26	0.072	1.83	8.88	SST	CG	N
0.48	12.192	71608	1.25	31.750	0.332	8.433	92.00	16.100	0.420	10.668	39.000	173.472	0.670	17.02	0.074	1.88	9.00	MW	CG	N
0.48	12.192	71608S	1.25	31.750	0.332	8.433	78.00	13.650	0.330	8.382	26.000	115.648	0.670	17.02	0.074	1.88	9.00	SST	CG	N
0.48	12.192	71623	1.25	31.750	0.318	8.077	139.00	24.325	0.360	9.144	50.000	222.400	0.730	18.54	0.081	2.06	9.00	MW	CG	N
0.48	12.192	71623S	1.25	31.750	0.318	8.077	118.00	20.650	0.294	7.468	35.000	155.680	0.787	19.99	0.082	2.08	9.60	SST	CG	N
0.48	12.192	71566S	1.38	35.052	0.354	8.992	36.00	6.300	0.465	11.811	16.700	74.282	0.580	14.73	0.063	1.59	9.30	SST	CG	N
0.48	12.192	71566	1.38	35.052	0.354	8.992	43.00	7.525	0.600	15.240	25.000	111.200	0.590	14.99	0.063	1.60	9.38	MW	CG	N
0.48	12.192	71471	1.50	38.100	0.410	10.414	4.70	0.823	1.000	25.400	4.800	21.350	0.250	6.35	0.035	0.89	7.25	MW	CG	N
0.48	12.192	71471S	1.50	38.100	0.410	10.414	4.00	0.700	0.820	20.828	3.300	14.678	0.250	6.35	0.035	0.89	7.25	SST	CG	N
0.48	12.192	71482	1.50	38.100	0.404	10.262	6.00	1.050	1.000	25.400	6.200	27.578	0.290	7.37	0.038	0.97	7.75	MW	CG	N
0.48	12.192	71482S	1.50	38.100	0.404	10.262	5.10	0.893	0.820	20.828	4.200	18.682	0.290	7.37	0.038	0.97	7.75	SST	CG	N
0.48	12.192	71496	1.50	38.100	0.396	10.058	8.50	1.488	0.970	24.638	8.300	36.918	0.350	8.89	0.042	1.07	8.25	MW	CG	N
0.48	12.192	71496S	1.50	38.100	0.396	10.058	7.20	1.260	0.770	19.558	5.600	24.909	0.350	8.89	0.042	1.07	8.25	SST	CG	N
0.48	12.192	71510	1.50	38.100	0.390	9.906	11.00	1.925	0.920	23.368	10.000	44.480	0.380	9.65	0.045	1.14	8.50	MW	CG	N
0.48	12.192	71510S	1.50	38.100	0.390	9.906	9.40	1.645	0.730	18.542	6.900	30.691	0.380	9.65	0.045	1.14	8.50	SST	CG	N
0.48	12.192	71524	1.50	38.100	0.378	9.601	17.00	2.975	0.820	20.828	14.000	62.272	0.480	12.19	0.051	1.30	9.38	MW	CG	N
0.48	12.192	71524S	1.50	38.100	0.378	9.601	14.00	2.450	0.650	16.510	9.300	41.366	0.480	12.19	0.051	1.30	9.38	SST	CG	N
0.48	12.192	71538	1.50	38.100	0.370	9.398	22.00	3.850	0.780	19.812	17.000	75.616	0.540	13.72	0.055	1.40	9.75	MW	CG	N
0.48	12.192	71538S	1.50	38.100	0.370	9.398	19.00	3.325	0.620	15.748	12.000	53.376	0.540	13.72	0.055	1.40	9.75	SST	CG	N
0.48	12.192	71552	1.50	38.100	0.362	9.195	29.00	5.075	0.730	18.542	21.000	93.408	0.600	15.24	0.059	1.50	10.10	MW	CG	N
0.48	12.192	71552S	1.50	38.100	0.362	9.195	24.00	4.200	0.580	14.732	14.000	62.272	0.600	15.24	0.059	1.50	10.10	SST	CG	N
0.48	12.192	71567S	1.50	38.100	0.354	8.992	32.00	5.600	0.523	13.284	16.700	74.282	0.637	16.18	0.063	1.59	10.20	SST	CG	N
0.48	12.192	71567	1.50	38.100	0.354	8.992	38.00	6.650	0.680	17.272	25.000	111.200	0.650	16.51	0.063	1.60	10.40	MW	CG	N
0.48	12.192	71581	1.50	38.100	0.346	8.788	48.00	8.400	0.630	16.002	30.000	133.440	0.700	17.78	0.067	1.70	10.50	MW	CG	N
0.48	12.192	71581S	1.50	38.100	0.346	8.788	41.00	7.175	0.510	12.954	21.000	93.408	0.700	17.78	0.067	1.70	10.50	SST	CG	N
0.48	12.192	71594	1.50	38.100	0.336	8.534	67.00	11.725	0.540	13.716	36.000	160.128	0.760	19.30	0.072	1.83	10.50	MW	CG	N
0.48	12.192	71594S	1.50	38.100	0.336	8.534	57.00	9.975	0.420											




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.48	12.192	71526S	1.75	44.450	0.378	9.601	12.00	2.100	0.770	19.558	9.300	41.366	0.540	13.72	0.051	1.30	10.60	SST CG N
0.48	12.192	71540	1.75	44.450	0.370	9.398	19.00	3.325	0.920	23.368	17.000	75.616	0.610	15.49	0.055	1.40	11.10	MW CG N
0.48	12.192	71540S	1.75	44.450	0.370	9.398	16.00	2.800	0.730	18.542	12.000	53.376	0.610	15.49	0.055	1.40	11.10	SST CG N
0.48	12.192	71554	1.75	44.450	0.362	9.195	24.00	4.200	0.870	22.098	21.000	93.408	0.690	17.53	0.059	1.50	11.60	MW CG N
0.48	12.192	71554S	1.75	44.450	0.362	9.195	21.00	3.675	0.690	17.526	14.000	62.272	0.690	17.53	0.059	1.50	11.60	SST CG N
0.48	12.192	71569S	1.75	44.450	0.354	8.992	27.00	4.725	0.620	15.748	16.700	74.282	0.732	18.59	0.063	1.59	11.70	SST CG N
0.48	12.192	71569	1.75	44.450	0.354	8.992	32.00	5.600	0.810	20.574	25.000	111.200	0.750	19.05	0.063	1.60	11.90	MW CG N
0.48	12.192	71582	1.75	44.450	0.346	8.788	41.00	7.175	0.750	19.050	30.000	133.440	0.810	20.57	0.067	1.70	12.10	MW CG N
0.48	12.192	71582S	1.75	44.450	0.346	8.788	35.00	6.125	0.600	15.240	21.000	93.408	0.810	20.57	0.067	1.70	12.10	SST CG N
0.48	12.192	71595	1.75	44.450	0.336	8.534	57.00	9.975	0.630	16.002	36.000	160.128	0.860	21.84	0.072	1.83	12.00	MW CG N
0.48	12.192	71595S	1.75	44.450	0.336	8.534	48.00	8.400	0.500	12.700	24.000	106.752	0.860	21.84	0.072	1.83	12.00	SST CG N
0.48	12.192	71610	1.75	44.450	0.332	8.433	64.00	11.200	0.610	15.494	39.000	173.472	0.900	22.86	0.074	1.88	12.10	MW CG N
0.48	12.192	71610S	1.75	44.450	0.332	8.433	54.00	9.450	0.480	12.192	26.000	115.648	0.900	22.86	0.074	1.88	12.10	SST CG N
0.48	12.192	71625	1.75	44.450	0.318	8.077	95.00	16.625	0.530	13.462	50.000	222.400	0.990	25.15	0.081	2.06	12.30	MW CG N
0.48	12.192	71625S	1.75	44.450	0.318	8.077	81.00	14.175	0.429	10.897	35.000	155.680	1.072	27.23	0.082	2.08	13.10	SST CG N
0.48	12.192	71473	2.00	50.800	0.410	10.414	3.50	0.613	1.400	35.560	4.800	21.350	0.320	8.13	0.035	0.89	9.00	MW CG N
0.48	12.192	71473S	2.00	50.800	0.410	10.414	3.00	0.525	1.100	27.940	3.300	14.678	0.320	8.13	0.035	0.89	9.00	SST CG N
0.48	12.192	71485	2.00	50.800	0.404	10.262	4.50	0.788	1.400	35.560	6.200	27.578	0.370	9.40	0.038	0.97	9.63	MW CG N
0.48	12.192	71485S	2.00	50.800	0.404	10.262	3.80	0.665	1.100	27.940	4.200	18.682	0.370	9.40	0.038	0.97	9.63	SST CG N
0.48	12.192	71499	2.00	50.800	0.396	10.058	6.40	1.120	1.300	33.020	8.300	36.918	0.440	11.18	0.042	1.07	10.40	MW CG N
0.48	12.192	71499S	2.00	50.800	0.396	10.058	5.40	0.945	1.000	25.400	5.600	24.909	0.440	11.18	0.042	1.07	10.40	SST CG N
0.48	12.192	71513	2.00	50.800	0.390	9.906	8.10	1.418	1.300	33.020	10.000	44.480	0.490	12.45	0.045	1.14	10.90	MW CG N
0.48	12.192	71513S	2.00	50.800	0.390	9.906	6.80	1.190	1.000	25.400	6.900	30.691	0.490	12.45	0.045	1.14	10.90	SST CG N
0.48	12.192	71527	2.00	50.800	0.378	9.601	12.00	2.100	1.100	27.940	14.000	62.272	0.610	15.49	0.051	1.30	11.90	MW CG N
0.48	12.192	71527S	2.00	50.800	0.378	9.601	11.00	1.925	0.880	22.352	9.300	41.366	0.610	15.49	0.051	1.30	11.90	SST CG N
0.48	12.192	71541	2.00	50.800	0.370	9.398	16.00	2.800	1.000	25.400	17.000	75.616	0.690	17.53	0.055	1.40	12.50	MW CG N
0.48	12.192	71541S	2.00	50.800	0.370	9.398	14.00	2.450	0.830	21.082	12.000	53.376	0.690	17.53	0.055	1.40	12.50	SST CG N
0.48	12.192	71555	2.00	50.800	0.362	9.195	21.00	3.675	1.000	25.400	21.000	93.408	0.770	19.56	0.059	1.50	13.00	MW CG N
0.48	12.192	71555S	2.00	50.800	0.362	9.195	18.00	3.150	0.790	20.066	14.000	62.272	0.770	19.56	0.059	1.50	13.00	SST CG N
0.48	12.192	71570S	2.00	50.800	0.354	8.992	23.00	4.025	0.727	18.466	16.700	74.282	0.837	21.26	0.063	1.59	13.40	SST CG N
0.48	12.192	71570	2.00	50.800	0.354	8.992	27.00	4.725	0.930	23.622	25.000	111.200	0.840	21.34	0.063	1.60	13.40	MW CG N
0.48	12.192	71583	2.00	50.800	0.346	8.788	35.00	6.125	0.870	22.098	30.000	133.440	0.910	23.11	0.067	1.70	13.60	MW CG N
0.48	12.192	71583S	2.00	50.800	0.346	8.788	30.00	5.250	0.690	17.526	21.000	93.408	0.910	23.11	0.067	1.70	13.60	SST CG N
0.48	12.192	71596	2.00	50.800	0.336	8.534	49.00	8.575	0.730	18.542	36.000	160.128	0.980	24.89	0.072	1.83	13.60	MW CG N
0.48	12.192	71596S	2.00	50.800	0.336	8.534	42.00	7.350	0.580	14.732	24.000	106.752	0.980	24.89	0.072	1.83	13.60	SST CG N
0.48	12.192	71611	2.00	50.800	0.332	8.433	55.00	9.625	0.710	18.034	39.000	173.472	1.020	25.91	0.074	1.88	13.80	MW CG N
0.48	12.192	71611S	2.00	50.800	0.332	8.433	47.00	8.225	0.560	14.224	26.000	115.648	1.020	25.91	0.074	1.88	13.80	SST CG N
0.48	12.192	71626	2.00	50.800	0.318	8.077	82.00	14.350	0.610	15.494	50.000	222.400	1.120	28.45	0.081	2.06	13.90	MW CG N
0.48	12.192	71626S	2.00	50.800	0.318	8.077	70.00	12.250	0.496	12.598	35.000	155.680	1.214	30.84	0.082	2.08	14.80	SST CG N
0.48	12.192	71486	2.25	57.150	0.404	10.262	4.20	0.735	1.500	38.100	6.200	27.578	0.390	9.91	0.038	0.97	10.30	MW CG N
0.48	12.192	71486S	2.25	57.150	0.404	10.262	3.60	0.630	1.200	30.480	4.200	18.682	0.390	9.91	0.038	0.97	10.30	SST CG N
0.48	12.192	71500	2.25	57.150	0.396	10.058	5.70	0.998	1.500	38.100	8.300	36.918	0.480	12.19	0.042	1.07	11.40	MW CG N
0.48	12.192	71500S	2.25	57.150	0.396	10.058	4.80	0.840	1.200	30.480	5.600	24.909	0.480	12.19	0.042	1.07	11.40	SST CG N
0.48	12.192	71514	2.25	57.150	0.390	9.906	7.10	1.243	1.400	35.560	10.000	44.480	0.550	13.97	0.045	1.14	12.10	MW CG N
0.48	12.192	71514S	2.25	57.150	0.390	9.906	6.00	1.050	1.100	27.940	6.900	30.691	0.550	13.97	0.045	1.14	12.10	SST CG N
0.48	12.192	71528	2.25	57.150	0.378	9.601	11.00	1.925	1.300	33.020	14.000	62.272	0.680	17.27	0.051	1.30	13.30	MW CG N
0.48	12.192	71528S	2.25	57.150	0.378	9.601	9.30	1.628	1.000	25.400	9.300	41.366	0.680	17.27	0.051	1.30	13.30	SST CG N
0.48	12.192	71542	2.25	57.150	0.370	9.398	15.00	2.625	1.200	30.480	17.000	75.616	0.760	19.30	0.055	1.40	13.80	MW CG N
0.48	12.192	71542S	2.25	57.150	0.370	9.398	12.00	2.100	0.940	23.876	12.000	53.376	0.760	19.30	0.055	1.40	13.80	SST CG N
0.48	12.192	71556	2.25	57.150	0.362	9.195	19.00	3.325	1.100	27.940	21.000	93.408	0.860	21.84	0.059	1.50	14.50	MW CG N
0.48	12.192	71556S	2.25	57.150	0.362	9.195	16.00	2.800	0.900	22.860	14.000	62.272	0.860	21.84	0.059	1.50	14.50	SST CG N
0.48	12.192	71571S	2.25	57.150	0.354	8.992	21.00	3.675	0.797	20.244	16.700	74.282	0.905	22.99	0.063	1.59	14.50	SST CG N
0.48	12.192	71571	2.25	57.150	0.354	8.992	24.00	4.200	1.000	25.400	25.000	111.200	0.940	23.88	0.063	1.60	14.90	MW CG N
0.48	12.192	71584	2.25	57.150	0.346	8.788	31.00	5.425	0.980	24.892	30.000	133.440	1.020	25.91	0.067	1.70	15.30	MW CG N
0.48	12.192	71584S	2.25	57.150	0.346	8.788	26.00	4.550	0.780	19.812	21.000	93.408	1.020	25.91</td				




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh								
0.48	12.192	71598S	2.50	63.500	0.336	8.534	33.00	5.775	0.730	18.542	24.000	106.752	1.210	30.73	0.072	1.83	16.80	SST	CG	N
0.48	12.192	71613	2.50	63.500	0.332	8.433	43.00	7.525	0.900	22.860	39.000	173.472	1.250	31.75	0.074	1.88	16.90	MW	CG	N
0.48	12.192	71613S	2.50	63.500	0.332	8.433	37.00	6.475	0.710	18.034	26.000	115.648	1.250	31.75	0.074	1.88	16.90	SST	CG	N
0.48	12.192	71628	2.50	63.500	0.318	8.077	65.00	11.375	0.780	19.812	50.000	222.400	1.390	35.31	0.081	2.06	17.10	MW	CG	N
0.48	12.192	71628S	2.50	63.500	0.318	8.077	55.00	9.625	0.631	16.027	35.000	155.680	1.501	38.13	0.082	2.08	18.30	SST	CG	N
0.48	12.192	71488	2.75	69.850	0.404	10.262	3.40	0.595	1.800	45.720	6.200	27.578	0.470	11.94	0.038	0.97	12.30	MW	CG	N
0.48	12.192	71488S	2.75	69.850	0.404	10.262	2.90	0.508	1.400	35.560	4.200	18.682	0.470	11.94	0.038	0.97	12.30	SST	CG	N
0.48	12.192	71502	2.75	69.850	0.396	10.058	4.80	0.840	1.700	43.180	8.300	36.918	0.550	13.97	0.042	1.07	13.00	MW	CG	N
0.48	12.192	71502S	2.75	69.850	0.396	10.058	4.10	0.718	1.400	35.560	5.600	24.909	0.550	13.97	0.042	1.07	13.00	SST	CG	N
0.48	12.192	71516	2.75	69.850	0.390	9.906	5.80	1.015	1.700	43.180	10.000	44.480	0.650	16.51	0.045	1.14	14.40	MW	CG	N
0.48	12.192	71516S	2.75	69.850	0.390	9.906	4.90	0.858	1.400	35.560	6.900	30.691	0.650	16.51	0.045	1.14	14.40	SST	CG	N
0.48	12.192	71530	2.75	69.850	0.378	9.601	8.80	1.540	1.600	40.640	14.000	62.272	0.820	20.83	0.051	1.30	16.00	MW	CG	N
0.48	12.192	71530S	2.75	69.850	0.378	9.601	7.40	1.295	1.200	30.480	9.300	41.366	0.820	20.83	0.051	1.30	16.00	SST	CG	N
0.48	12.192	71544	2.75	69.850	0.370	9.398	12.00	2.100	1.500	38.100	17.000	75.616	0.910	23.11	0.055	1.40	16.60	MW	CG	N
0.48	12.192	71545S	2.75	69.850	0.370	9.398	10.00	1.750	1.200	30.480	12.000	53.376	0.910	23.11	0.055	1.40	16.60	SST	CG	N
0.48	12.192	71558	2.75	69.850	0.362	9.195	15.00	2.625	1.400	35.560	21.000	93.408	1.030	26.16	0.059	1.50	17.40	MW	CG	N
0.48	12.192	71558S	2.75	69.850	0.362	9.195	13.00	2.275	1.100	27.940	14.000	62.272	1.030	26.16	0.059	1.50	17.40	SST	CG	N
0.48	12.192	71573S	2.75	69.850	0.354	8.992	17.00	2.975	0.984	24.994	16.700	74.282	1.089	27.66	0.063	1.59	17.40	SST	CG	N
0.48	12.192	71573	2.75	69.850	0.354	8.992	20.00	3.500	1.300	33.020	25.000	111.200	1.120	28.45	0.063	1.60	17.80	MW	CG	N
0.48	12.192	71586	2.75	69.850	0.346	8.788	25.00	4.375	1.200	30.480	30.000	133.440	1.230	31.24	0.067	1.70	18.40	MW	CG	N
0.48	12.192	71586S	2.75	69.850	0.346	8.788	21.00	3.675	0.970	24.638	21.000	93.408	1.230	31.24	0.067	1.70	18.40	SST	CG	N
0.48	12.192	71599	2.75	69.850	0.336	8.534	35.00	6.125	1.000	25.400	36.000	160.128	1.310	33.27	0.072	1.83	18.30	MW	CG	N
0.48	12.192	71599S	2.75	69.850	0.336	8.534	30.00	5.250	0.810	20.574	24.000	106.752	1.310	33.27	0.072	1.83	18.30	SST	CG	N
0.48	12.192	71614	2.75	69.850	0.332	8.433	39.00	6.825	0.990	25.146	39.000	173.472	1.370	34.80	0.074	1.88	18.50	MW	CG	N
0.48	12.192	71614S	2.75	69.850	0.332	8.433	33.00	5.775	0.780	19.812	26.000	115.648	1.370	34.80	0.074	1.88	18.50	SST	CG	N
0.48	12.192	71629	2.75	69.850	0.318	8.077	58.00	10.150	0.870	22.098	50.000	222.400	1.520	38.61	0.081	2.06	18.80	MW	CG	N
0.48	12.192	71629S	2.75	69.850	0.318	8.077	50.00	8.750	0.694	17.628	35.000	155.680	1.634	41.50	0.082	2.08	19.90	SST	CG	N
0.48	12.192	71475	3.00	76.200	0.410	10.414	2.30	0.403	2.100	53.340	4.800	21.350	0.440	11.18	0.035	0.89	12.60	MW	CG	N
0.48	12.192	71475S	3.00	76.200	0.410	10.414	2.00	0.350	1.700	43.180	3.300	14.678	0.440	11.18	0.035	0.89	12.60	SST	CG	N
0.48	12.192	71489	3.00	76.200	0.404	10.262	2.60	0.455	1.600	40.640	4.200	18.682	0.500	12.70	0.038	0.97	13.10	SST	CG	N
0.48	12.192	71503	3.00	76.200	0.396	10.058	4.40	0.770	1.900	48.260	8.300	36.918	0.590	14.99	0.042	1.07	14.00	MW	CG	N
0.48	12.192	71503S	3.00	76.200	0.396	10.058	3.80	0.665	1.500	38.100	5.600	24.909	0.590	14.99	0.042	1.07	14.00	SST	CG	N
0.48	12.192	12726	3.00	76.200	0.390	9.906	5.10	0.893	1.300	33.020	6.900	30.691	0.640	16.26	0.045	1.14	14.30	SST	CG	N
0.48	12.192	71517	3.00	76.200	0.390	9.906	5.30	0.928	1.900	48.260	10.000	44.480	0.700	17.78	0.045	1.14	15.50	MW	CG	N
0.48	12.192	71517S	3.00	76.200	0.390	9.906	4.50	0.788	1.500	38.100	6.900	30.691	0.700	17.78	0.045	1.14	15.50	SST	CG	N
0.48	12.192	71531	3.00	76.200	0.378	9.601	8.00	1.400	1.700	43.180	14.000	62.272	0.890	22.61	0.051	1.30	17.40	MW	CG	N
0.48	12.192	71531S	3.00	76.200	0.378	9.601	6.80	1.190	1.400	35.560	9.300	41.366	0.890	22.61	0.051	1.30	17.40	SST	CG	N
0.48	12.192	71545	3.00	76.200	0.370	9.398	11.00	1.925	1.600	40.640	17.000	75.616	0.990	25.15	0.055	1.40	18.00	MW	CG	N
0.48	12.192	71545S	3.00	76.200	0.370	9.398	9.10	1.593	1.300	33.020	12.000	53.376	0.990	25.15	0.055	1.40	18.00	SST	CG	N
0.48	12.192	71559	3.00	76.200	0.362	9.195	14.00	2.450	1.500	38.100	21.000	93.408	1.110	28.19	0.059	1.50	18.90	MW	CG	N
0.48	12.192	71559S	3.00	76.200	0.362	9.195	12.00	2.100	1.200	30.480	14.000	62.272	1.110	28.19	0.059	1.50	18.90	SST	CG	N
0.48	12.192	71574S	3.00	76.200	0.354	8.992	15.00	2.625	1.115	28.321	16.700	74.282	1.217	30.91	0.063	1.59	19.50	SST	CG	N
0.48	12.192	71574	3.00	76.200	0.354	8.992	18.00	3.150	1.400	35.560	25.000	111.200	1.240	31.50	0.063	1.60	19.80	MW	CG	N
0.48	12.192	71587	3.00	76.200	0.346	8.788	23.00	4.025	1.300	33.020	30.000	133.440	1.330	33.78	0.067	1.70	19.90	SST	CG	N
0.48	12.192	71587S	3.00	76.200	0.346	8.788	20.00	3.500	1.100	27.940	21.000	93.408	1.330	33.78	0.067	1.70	19.90	SST	CG	N
0.48	12.192	71600	3.00	76.200	0.336	8.534	32.00	5.600	1.100	27.940	36.000	160.128	1.430	36.32	0.072	1.83	19.90	MW	CG	N
0.48	12.192	71600S	3.00	76.200	0.336	8.534	27.00	4.725	0.890	22.606	24.000	106.752	1.430	36.32	0.072	1.83	19.90	SST	CG	N
0.48	12.192	71615	3.00	76.200	0.332	8.433	36.00	6.300	1.100	27.940	39.000	173.472	1.480	37.59	0.074	1.88	20.00	MW	CG	N
0.48	12.192	71615S	3.00	76.200	0.332	8.433	30.00	5.250	0.860	21.844	26.000	115.648	1.480	37.59	0.074	1.88	20.00	SST	CG	N
0.48	12.192	71630	3.00	76.200	0.318	8.077	53.00	9.275	0.950	24.130	50.000	222.400	1.640	41.66	0.081	2.06	20.30	MW	CG	N
0.48	12.192	71630S	3.00	76.200	0.318	8.077	45.00	7.875	0.771	19.583	35.000	155.680	1.798	45.67	0.082	2.08	22.00	SST	CG	N
0.48	12.192	71601	3.25	82.550	0.336	8.534	29.00	5.075	1.200	30.480	36.000	160.128	1.540	39.12	0.072	1.83	21.40	MW	CG	N
0.48	12.192	71601S	3.25	82.550	0.3															




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h						
0.484	12.294	3807	0.47	11.938	0.372	9.449	72.00	12.600	0.180	4.572	13.000	57.824	0.250	6.35	0.056	1.42	4.50	SPR CG Z
0.484	12.294	A9-55	0.47	11.938	0.348	8.839	189.00	33.075	0.110	2.794	21.000	93.408	0.270	6.86	0.068	1.73	4.00	SST CG N
0.484	12.294	N-112	0.48	12.192	0.416	10.566	9.20	1.610	0.340	8.636	3.100	13.789	0.140	3.56	0.034	0.86	4.00	SST CG N
0.484	12.294	GG-1	0.50	12.700	0.444	11.278	1.00	0.175	0.400	10.160	0.410	1.824	0.100	2.54	0.020	0.51	4.00	SST C N
0.484	12.294	BB-93	0.50	12.700	0.434	11.024	2.20	0.385	0.370	9.398	0.830	3.692	0.130	3.30	0.025	0.64	4.25	SST C N
0.484	12.294	10847	0.50	12.700	0.428	10.871	6.20	1.085	0.400	10.160	2.500	11.120	0.100	2.54	0.028	0.71	3.50	MW CG Z
0.484	12.294	H-28	0.50	12.700	0.402	10.211	14.00	2.450	0.300	7.620	4.100	18.237	0.210	5.33	0.041	1.04	5.00	SST CG N
0.484	12.294	Y-18	0.50	12.700	0.394	10.008	20.00	3.500	0.280	7.112	5.600	24.909	0.230	5.84	0.045	1.14	5.00	SST CG N
0.484	12.294	2660	0.50	12.700	0.382	9.703	40.00	7.000	0.250	6.350	9.800	43.590	0.260	6.60	0.051	1.30	5.00	SPR CG Z
0.484	12.294	12236	0.50	12.700	0.376	9.550	61.00	10.675	0.190	4.826	12.000	53.376	0.240	6.10	0.054	1.37	4.50	SPR CG N
0.484	12.294	11384	0.50	12.700	0.374	9.500	67.00	11.725	0.250	6.350	17.000	75.616	0.250	6.35	0.055	1.40	4.50	MW CG Z
0.484	12.294	CC-84	0.53	13.462	0.384	9.754	32.00	5.600	0.270	6.858	8.700	38.698	0.250	6.35	0.050	1.27	5.00	SST CG N
0.484	12.294	A11-68	0.53	13.462	0.338	8.585	174.00	30.450	0.151	3.835	26.000	115.648	0.372	9.45	0.074	1.88	5.00	SST CG N
0.484	12.294	1757	0.56	14.224	0.410	10.414	15.00	2.625	0.370	9.398	5.600	24.909	0.190	4.83	0.037	0.94	4.00	MW C Z
0.484	12.294	S-1009	0.56	14.224	0.404	10.262	16.00	2.800	0.300	7.620	4.800	21.350	0.210	5.33	0.040	1.02	4.25	SST C N
0.484	12.294	FF-58	0.56	14.224	0.394	10.008	21.00	3.675	0.330	8.382	6.800	30.246	0.230	5.84	0.045	1.14	5.00	SST CG N
0.484	12.294	XX-37	0.56	14.224	0.390	9.906	28.00	4.900	0.280	7.112	7.800	34.694	0.280	7.11	0.047	1.19	5.00	SPR C Z
0.484	12.294	10993	0.56	14.224	0.372	9.449	90.00	15.750	0.140	3.556	13.000	57.824	0.280	7.11	0.056	1.42	4.00	HD C Z
0.484	12.294	N-134	0.59	14.986	0.420	10.668	3.30	0.578	0.370	9.398	1.200	5.338	0.220	5.59	0.032	0.81	7.00	SPR CG N
0.484	12.294	W-35	0.59	14.986	0.414	10.516	5.20	0.910	0.350	8.890	1.800	8.006	0.250	6.35	0.035	0.89	6.00	SST C N
0.484	12.294	11197	0.63	16.002	0.420	10.668	3.90	0.683	0.410	10.414	1.600	7.117	0.220	5.59	0.032	0.81	5.75	SST C N
0.484	12.294	10781	0.63	16.002	0.384	9.754	44.00	7.700	0.210	5.334	9.300	41.366	0.230	5.84	0.050	1.27	4.50	SPR CG N
0.484	12.294	PP-87	0.63	16.002	0.384	9.754	31.00	5.425	0.290	7.366	9.300	41.366	0.280	7.11	0.050	1.27	5.50	SPR CG Z
0.484	12.294	2625	0.63	16.002	0.372	9.449	72.00	12.600	0.250	6.350	18.000	80.064	0.250	6.35	0.056	1.42	4.50	MW CG Z
0.484	12.294	B9-12	0.69	17.526	0.436	11.074	3.70	0.648	0.470	11.938	1.700	7.562	0.100	2.54	0.024	0.61	3.33	MW C Z
0.484	12.294	S-866	0.72	18.288	0.414	10.516	5.20	0.910	0.510	12.954	2.600	11.565	0.210	5.33	0.035	0.89	6.00	SST CG N
0.484	12.294	S-1401	0.72	18.288	0.360	9.144	82.00	14.350	0.202	5.131	16.600	73.837	0.319	8.10	0.063	1.59	5.10	SST CG N
0.484	12.294	S-1560	0.72	18.288	0.304	7.722	383.00	67.025	0.110	2.794	43.000	191.264	0.500	12.70	0.090	2.29	5.50	SST CG N
0.484	12.294	W-60	0.75	19.050	0.448	11.379	0.14	0.025	0.530	13.462	0.070	0.311	0.220	5.59	0.018	0.46	11.30	SST C N
0.484	12.294	N-85	0.75	19.050	0.436	11.074	1.40	0.245	0.610	15.494	0.860	3.825	0.140	3.56	0.024	0.61	5.00	SST C N
0.484	12.294	FF-35	0.75	19.050	0.432	10.973	2.00	0.350	0.590	14.986	1.200	5.338	0.160	4.06	0.026	0.66	5.00	SST C N
0.484	12.294	II-75	0.75	19.050	0.404	10.262	9.30	1.628	0.470	11.938	4.400	19.571	0.280	7.11	0.040	1.02	6.00	SST C N
0.484	12.294	JJ-97	0.75	19.050	0.376	9.550	38.00	6.650	0.300	7.620	12.000	53.376	0.320	8.13	0.054	1.37	6.00	SPR CG GI
0.484	12.294	10934	0.75	19.050	0.358	9.093	71.00	12.425	0.260	6.604	18.000	80.064	0.390	9.91	0.063	1.60	6.25	SPR CG Z
0.484	12.294	3594	0.75	19.050	0.340	8.636	138.00	24.150	0.260	6.604	36.000	160.128	0.430	10.92	0.072	1.83	6.00	MW CG GI
0.484	12.294	S-1539	0.78	19.812	0.426	10.820	2.00	0.350	0.590	14.986	1.200	5.338	0.200	5.08	0.029	0.74	6.75	SST CG N
0.484	12.294	10899	0.78	19.812	0.334	8.484	285.00	49.875	0.100	2.540	29.000	128.992	0.330	8.38	0.075	1.91	4.33	SPR CG N
0.484	12.294	12425	0.81	20.574	0.430	10.922	3.20	0.560	0.660	16.764	2.100	9.341	0.150	3.81	0.027	0.69	4.50	MW C N
0.484	12.294	1653	0.81	20.574	0.350	8.890	80.00	14.000	0.270	6.858	22.000	97.856	0.470	11.94	0.067	1.70	7.00	HD CG Z
0.484	12.294	12215	0.84	21.336	0.424	10.770	3.10	0.543	0.630	16.002	2.000	8.896	0.210	5.33	0.030	0.76	6.00	MW C Z
0.484	12.294	W-64	0.84	21.336	0.416	10.566	6.20	1.085	0.500	12.700	3.100	13.789	0.200	5.08	0.034	0.86	5.00	SST C N
0.484	12.294	10557	0.84	21.336	0.346	8.788	107.00	18.725	0.220	5.588	24.000	106.752	0.430	10.92	0.069	1.75	6.25	SPR CG Z
0.484	12.294	I-31	0.88	22.352	0.446	11.328	0.31	0.054	0.700	17.780	0.220	0.979	0.170	4.32	0.019	0.48	8.00	MW CG N
0.484	12.294	H-90	0.88	22.352	0.440	11.176	0.31	0.054	0.590	14.986	0.180	0.801	0.280	7.11	0.022	0.56	11.80	SST C N
0.484	12.294	4285	0.88	22.352	0.360	9.144	47.00	8.225	0.370	9.398	17.000	75.616	0.500	12.70	0.062	1.57	8.00	SPR CG Z
0.484	12.294	CC-1	0.88	22.352	0.300	7.620	270.00	47.250	0.170	4.318	46.000	204.608	0.690	17.53	0.092	2.34	7.50	SST CG N
0.484	12.294	G-75	0.88	22.352	0.266	6.756	641.00	112.175	0.003	0.076	1.900	8.451	0.870	22.10	0.109	2.77	8.00	HD CG N
0.484	12.294	PP-80	0.91	23.114	0.418	10.617	4.10	0.718	0.660	16.764	2.700	12.010	0.250	6.35	0.033	0.84	6.50	SPR C N
0.484	12.294	B12-21	0.94	23.876	0.402	10.211	12.00	2.100	0.470	11.938	5.500	24.464	0.250	6.35	0.041	1.04	6.00	SPR CG N
0.484	12.294	YY-53	0.94	23.876	0.394	10.008	15.00	2.625	0.450	11.430	6.800	30.246	0.320	8.13	0.045	1.14	6.00	SST C N
0.484	12.294	TT-40	0.94	23.876	0.392	9.957	18.00	3.150	0.410	10.414	7.300	32.470	0.260	6.60	0.046	1.17	5.75	SST CG N
0.484	12.294	S-399	0.94	23.876	0.358	9.093	48.00	8.400	0.346	8.788	16.600	73.837	0.457	11.61	0.063	1.59	7.30	SST CG N
0.484	12.294	II-90	0.94	23.876	0.350	8.890	67.00	11.725	0.330	8.382	22.000	97.856	0.540	13.72	0.067	1.70	8.00	SPR CG N
0.484	12.294	1525	1.00	25.400	0.418	10.617	2.10	0.368	0.600	15.240	1.200	5.338	0.400	10.16	0.033	0.84	11.00	SPR C Z
0.484	12.294	S-3135	1.00	25.400	0.410	10.414	6.60	1.155	0.580	14.732	3.800	16.902	0.220	5.59	0.037	0.94	6.00	SST CG N
0.484	12.294	1885	1.00	25.400	0.394	10.008	17.00	2.975	0.550	13.9								




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
0.484	12.294	S-294	1.25	31.750	0.416	10.566	4.60	0.805	0.670	17.018	3.100	13.789	0.240	6.10	0.034	0.86	6.00	SST	C	N
0.484	12.294	10695	1.25	31.750	0.376	9.550	28.00	4.900	0.420	10.668	12.000	53.376	0.410	10.41	0.054	1.37	7.50	SPR	CG	Z
0.484	12.294	11403	1.25	31.750	0.376	9.550	21.00	3.675	0.520	13.208	11.000	48.928	0.510	12.95	0.054	1.37	8.50	SST	CG	N
0.484	12.294	A11-31	1.28	32.512	0.392	9.957	13.00	2.275	0.550	13.970	7.300	32.470	0.330	8.38	0.046	1.17	7.00	SST	CG	N
0.484	12.294	A15-60	1.28	32.512	0.350	8.890	55.00	9.625	0.380	9.652	21.000	93.408	0.570	14.48	0.067	1.70	8.50	SST	CG	N
0.484	12.294	A9-37	1.28	32.512	0.340	8.636	65.00	11.375	0.390	9.906	26.000	115.648	0.760	19.30	0.072	1.83	10.50	SPR	CG	N
0.484	12.294	S-802	1.34	34.036	0.392	9.957	10.00	1.750	0.710	18.034	7.300	32.470	0.390	9.91	0.046	1.17	8.50	SST	CG	N
0.484	12.294	1871	1.34	34.036	0.340	8.636	79.00	13.825	0.320	8.128	26.000	115.648	0.650	16.51	0.072	1.83	9.00	HD	CG	Z
0.484	12.294	B10-61	1.35	34.290	0.376	9.550	26.00	4.550	0.450	11.430	12.000	53.376	0.430	10.92	0.054	1.37	8.00	SPR	CG	Z
0.484	12.294	11983	1.38	35.052	0.400	10.160	10.00	1.750	0.570	14.478	5.900	26.243	0.340	8.64	0.042	1.07	7.00	SPR	C	Z
0.484	12.294	CC-9	1.38	35.052	0.394	10.008	7.60	1.330	0.900	22.860	6.800	30.246	0.450	11.43	0.045	1.14	10.00	SST	CG	N
0.484	12.294	S-945	1.38	35.052	0.384	9.754	13.00	2.275	0.650	16.510	8.700	38.698	0.460	11.68	0.050	1.27	9.25	SST	CG	N
0.484	12.294	3832	1.38	35.052	0.340	8.636	55.00	9.625	0.460	11.684	26.000	115.648	0.860	21.84	0.072	1.83	12.00	HD	CG	Z
0.484	12.294	12226	1.38	35.052	0.334	8.484	66.00	11.550	0.430	10.922	29.000	128.992	0.900	22.86	0.075	1.91	12.00	SPR	CG	N
0.484	12.294	3903	1.38	35.052	0.264	6.706	503.00	88.025	0.160	4.064	79.000	351.392	1.100	27.94	0.110	2.79	10.00	SPR	CG	Z
0.484	12.294	B14-47	1.41	35.814	0.418	10.617	2.90	0.508	1.100	27.940	3.000	13.344	0.280	7.11	0.033	0.84	8.50	SPR	CG	N
0.484	12.294	B9-8	1.44	36.576	0.396	10.058	14.00	2.450	0.480	12.192	6.800	30.246	0.290	7.37	0.044	1.12	6.50	SPR	CG	Z
0.484	12.294	YY-60	1.44	36.576	0.392	9.957	13.00	2.275	0.610	15.494	7.800	34.694	0.410	10.41	0.046	1.17	8.00	SPR	C	Z
0.484	12.294	A15-66	1.47	37.338	0.364	9.246	29.00	5.075	0.510	12.954	15.000	66.720	0.570	14.48	0.060	1.52	9.50	SST	CG	N
0.484	12.294	2620	1.47	37.338	0.356	9.042	33.00	5.775	0.590	14.986	19.000	84.512	0.770	19.56	0.064	1.63	12.00	HD	CG	Z
0.484	12.294	S-1376	1.50	38.100	0.414	10.516	1.30	0.228	0.840	21.336	1.100	4.893	0.660	16.76	0.035	0.89	17.80	SST	C	N
0.484	12.294	3570	1.50	38.100	0.408	10.363	4.20	0.735	1.000	25.400	4.400	19.571	0.420	10.67	0.038	0.97	10.00	SPR	C	Z
0.484	12.294	12219	1.50	38.100	0.408	10.363	6.80	1.190	0.650	16.510	4.400	19.571	0.270	6.86	0.038	0.97	7.00	SPR	CG	Z
0.484	12.294	3665	1.50	38.100	0.404	10.262	6.70	1.173	0.760	19.304	5.100	22.685	0.370	9.40	0.040	1.02	8.25	SPR	C	Z
0.484	12.294	S-1490	1.50	38.100	0.402	10.211	6.50	1.138	0.800	20.320	5.200	23.130	0.340	8.64	0.041	1.04	8.25	SST	CG	N
0.484	12.294	A13-40	1.50	38.100	0.390	9.906	14.00	2.450	0.590	14.986	8.300	36.918	0.380	9.65	0.047	1.19	8.00	SPR	CG	GI
0.484	12.294	S-1413	1.50	38.100	0.382	9.703	10.00	1.750	0.840	21.336	8.700	38.698	0.660	16.76	0.051	1.30	12.00	SST	C	N
0.484	12.294	2729	1.50	38.100	0.376	9.550	17.00	2.975	0.680	17.272	12.000	53.376	0.590	14.99	0.054	1.37	11.00	HD	CG	Z
0.484	12.294	H-42	1.50	38.100	0.370	9.398	22.00	3.850	0.630	16.002	14.000	62.272	0.680	17.27	0.057	1.45	11.00	SPR	C	Z
0.484	12.294	B9-69	1.50	38.100	0.364	9.246	20.00	3.500	0.660	16.764	13.000	57.824	0.840	21.34	0.060	1.52	14.00	SPR	CG	N
0.484	12.294	F-48	1.50	38.100	0.360	9.144	35.00	6.125	0.490	12.446	17.000	75.616	0.620	15.75	0.062	1.57	10.00	SPR	CG	Z
0.484	12.294	3153	1.50	38.100	0.340	8.636	63.00	11.025	0.400	10.160	26.000	115.648	0.770	19.56	0.072	1.83	10.80	SPR	CG	Z
0.484	12.294	Q-75	1.50	38.100	0.260	6.604	628.00	109.900	0.130	3.302	83.000	369.184	1.010	25.65	0.112	2.84	9.00	SPR	CG	Z
0.484	12.294	S-223	1.56	39.624	0.412	10.465	2.90	0.508	1.200	30.480	3.500	15.568	0.360	9.14	0.036	0.91	10.00	SST	CG	N
0.484	12.294	4286	1.56	39.624	0.374	9.500	16.00	2.800	0.770	19.558	12.000	53.376	0.690	17.53	0.055	1.40	12.50	SPR	CG	Z
0.484	12.294	10039	1.59	40.386	0.372	9.449	17.00	2.975	0.750	19.050	13.000	57.824	0.700	17.78	0.056	1.42	12.50	SPR	CG	N
0.484	12.294	10833	1.63	41.402	0.404	10.262	8.00	1.400	0.640	16.256	5.100	22.685	0.290	7.37	0.040	1.02	7.25	SPR	CG	Z
0.484	12.294	J-40	1.63	41.402	0.384	9.754	16.00	2.800	0.550	13.970	8.700	38.698	0.400	10.16	0.050	1.27	8.00	SST	CG	N
0.484	12.294	11244	1.63	41.402	0.360	9.144	33.00	5.775	0.520	13.208	17.000	75.616	0.650	16.51	0.062	1.57	10.50	SPR	CG	Z
0.484	12.294	S-1268	1.63	41.402	0.340	8.636	51.00	8.925	0.470	11.938	24.000	106.752	0.830	21.08	0.072	1.83	11.50	SST	CG	N
0.484	12.294	4226	1.63	41.402	0.324	8.230	85.00	14.875	0.410	10.414	35.000	155.680	1.000	25.40	0.080	2.03	12.50	SPR	CG	GI
0.484	12.294	10356	1.69	42.926	0.408	10.363	6.80	1.190	0.650	16.510	4.400	19.571	0.300	7.62	0.038	0.97	7.00	SPR	C	Z
0.484	12.294	10320	1.69	42.926	0.360	9.144	29.00	5.075	0.600	15.240	17.000	75.616	0.790	20.07	0.062	1.57	11.80	SPR	C	Z
0.484	12.294	S-843	1.69	42.926	0.340	8.636	47.00	8.225	0.510	12.954	24.000	106.752	0.900	22.86	0.072	1.83	12.50	SST	CG	N
0.484	12.294	11270	1.72	43.688	0.288	7.315	210.00	36.750	0.280	7.112	59.000	262.432	1.270	32.26	0.098	2.49	13.00	SPR	CG	Z
0.484	12.294	2888	1.75	44.450	0.360	9.144	24.00	4.200	0.740	18.796	17.000	75.616	0.930	23.62	0.062	1.57	14.00	SPR	C	Z
0.484	12.294	3240	1.75	44.450	0.324	8.230	112.00	19.600	0.310	7.874	35.000	155.680	0.800	20.32	0.080	2.03	10.00	SPR	CG	Z
0.484	12.294	10493	1.81	45.974	0.388	9.855	8.40	1.470	1.100	27.940	8.800	39.142	0.620	15.75	0.048	1.22	13.00	SPR	CG	GI
0.484	12.294	10282	1.81	45.974	0.376	9.550	19.00	3.325	0.600	15.240	12.000	53.376	0.590	14.99	0.054	1.37	10.00	SPR	C	Z
0.484	12.294	XX-66	1.81	45.974	0.360	9.144	28.00	4.900	0.620	15.748	17.000	75.616	0.740	18.80	0.062	1.57	12.00	SPR	CG	Z
0.484	12.294	H-46	1.81	45.974	0.360	9.144	19.00	3.325	0.847	21.514	16.000	71.168	0.963	24.46	0.063	1.59	15.00	SST	CG	N
0.484	12.294	2790	1.84	46.736	0.356	9.042	33.00	5.775	0.590	14.986	19.000	84.512	0.830	21.08	0.064	1.63	12.00	SPR	C	Z
0.484	12.294	10413	1.88	47.752	0.376	9.550	15.00													




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h							
0.484	12.294	1693	4.63	117.602	0.374	9.500	6.90	1.208	1.800	45.720	12.000	53.376	1.490	37.85	0.055	1.40	26.00	SPR C	Z
0.484	12.294	12206	5.25	133.350	0.388	9.855	2.60	0.455	3.400	86.360	8.600	38.253	1.870	47.50	0.048	1.22	38.00	SPR C	Z
0.484	12.294	12308	5.63	143.002	0.384	9.754	3.40	0.595	2.700	68.580	9.300	41.366	1.780	45.21	0.050	1.27	34.50	SPR C	Z
0.484	12.294	S-3182	12.00	304.800	0.422	10.719	0.100	0.02	8.100	205.740	0.820	3.647	3.910	99.31	0.031	0.79	125.00	SST C	N
0.485	12.319	12693	1.00	25.400	0.277	7.036	441.00	77.175	0.131	3.327	58.000	257.984	0.869	22.07	0.105	2.67	8.30	SST CG	N
0.492	12.497	12715	0.97	24.638	0.402	10.211	13.00	2.275	0.650	16.510	8.600	38.253	0.320	8.13	0.045	1.14	7.00	MW CG	Z
0.5	12.700	B8-11	0.25	6.350	0.402	10.211	90.00	15.750	0.100	2.540	9.100	40.477	0.150	3.81	0.049	1.24	3.00	SPR CG	GI
0.5	12.700	G-100	0.38	9.652	0.464	11.786	0.45	0.079	0.270	6.858	0.120	0.534	0.110	2.79	0.018	0.46	5.00	MW C	N
0.5	12.700	G-19	0.38	9.652	0.450	11.430	5.20	0.910	0.280	7.112	1.400	6.227	0.100	2.54	0.025	0.64	3.00	MW C	Z
0.5	12.700	S-1097	0.38	9.652	0.448	11.379	1.80	0.315	0.220	5.588	0.390	1.735	0.160	4.06	0.026	0.66	5.00	SST C	N
0.5	12.700	L-4	0.38	9.652	0.402	10.211	90.00	15.750	0.100	2.540	9.100	40.477	0.200	5.08	0.049	1.24	3.00	SPR C	Z
0.5	12.700	LL-83	0.38	9.652	0.356	9.042	493.00	86.275	0.050	1.270	25.000	111.200	0.290	7.37	0.072	1.83	3.00	SPR C	Z
0.5	12.700	BB-92	0.41	10.414	0.432	10.973	8.30	1.453	0.270	6.858	2.200	9.786	0.140	3.56	0.034	0.86	4.00	SST CG	N
0.5	12.700	10884	0.44	11.176	0.468	11.887	0.17	0.030	0.310	7.874	0.050	0.222	0.130	3.30	0.016	0.41	7.00	MW C	Z
0.5	12.700	H-54	0.44	11.176	0.448	11.379	6.20	1.085	0.330	8.382	2.000	8.896	0.080	2.03	0.026	0.66	3.00	MW CG	Z
0.5	12.700	S-351	0.44	11.176	0.422	10.719	7.50	1.313	0.200	5.080	1.500	6.672	0.230	5.84	0.039	0.99	6.00	SST CG	N
0.5	12.700	3751	0.44	11.176	0.386	9.804	87.00	15.225	0.150	3.810	13.000	57.824	0.230	5.84	0.057	1.45	4.00	SPR CG	Z
0.5	12.700	4179	0.50	12.700	0.462	11.735	0.56	0.098	0.390	9.906	0.220	0.979	0.110	2.79	0.019	0.48	5.00	MW C	BO
0.5	12.700	S-108	0.50	12.700	0.460	11.684	0.60	0.105	0.380	9.652	0.230	1.023	0.120	3.05	0.020	0.51	5.00	SST C	N
0.5	12.700	2931	0.50	12.700	0.456	11.582	1.00	0.175	0.370	9.398	0.380	1.690	0.130	3.30	0.022	0.56	5.00	MW C	Z
0.5	12.700	S-905	0.50	12.700	0.444	11.278	3.40	0.595	0.360	9.144	1.200	5.338	0.140	3.56	0.028	0.71	4.00	SST CG	N
0.5	12.700	4118	0.50	12.700	0.432	10.973	19.00	3.325	0.170	4.318	3.200	14.234	0.140	3.56	0.034	0.86	3.00	SPR C	Z
0.5	12.700	Y-41	0.50	12.700	0.430	10.922	11.00	1.925	0.310	7.874	3.300	14.678	0.140	3.56	0.035	0.89	4.00	SPR CG	Z
0.5	12.700	S-118	0.50	12.700	0.406	10.312	33.00	5.775	0.230	5.842	7.500	33.360	0.190	4.83	0.047	1.19	4.00	SST CG	N
0.5	12.700	NN-4	0.50	12.700	0.400	10.160	39.00	6.825	0.230	5.842	9.000	40.032	0.230	5.84	0.050	1.27	4.50	SPR CG	N
0.5	12.700	B1-33	0.50	12.700	0.388	9.855	72.00	12.600	0.160	4.064	12.000	53.376	0.220	5.59	0.056	1.42	4.00	SST CG	N
0.5	12.700	3215	0.53	13.462	0.460	11.684	0.69	0.121	0.430	10.922	0.300	1.334	0.100	2.54	0.020	0.51	5.00	MW CG	Z
0.5	12.700	G-11	0.53	13.462	0.398	10.109	36.00	6.300	0.230	5.842	8.100	36.029	0.310	7.87	0.051	1.30	5.00	SPR C	N
0.5	12.700	O-52	0.53	13.462	0.310	7.874	766.00	134.050	0.060	1.524	49.000	217.952	0.380	9.65	0.095	2.41	4.00	SST CG	N
0.5	12.700	L-52	0.55	13.970	0.300	7.620	1123.00	196.525	0.050	1.270	61.000	271.328	0.400	10.16	0.100	2.54	4.00	SPR CG	Z
0.5	12.700	F-78	0.56	14.224	0.456	11.582	1.00	0.175	0.430	10.922	0.440	1.957	0.130	3.30	0.022	0.56	5.00	MW C	Z
0.5	12.700	EE-22	0.56	14.224	0.420	10.668	8.20	1.435	0.320	8.128	2.600	11.565	0.240	6.10	0.040	1.02	6.00	SST CG	N
0.5	12.700	LL-26	0.56	14.224	0.420	10.668	17.00	2.975	0.300	7.620	5.000	22.240	0.170	4.32	0.040	1.02	4.25	SPR CG	GI
0.5	12.700	WV-37	0.56	14.224	0.416	10.566	23.00	4.025	0.250	6.350	5.700	25.354	0.210	5.33	0.042	1.07	4.00	SPR C	GI
0.5	12.700	S-1304	0.56	14.224	0.392	9.957	48.00	8.400	0.220	5.588	11.000	48.928	0.240	6.10	0.054	1.37	4.50	SST CG	N
0.5	12.700	XX-62	0.56	14.224	0.316	8.026	607.00	106.225	0.080	2.032	48.000	213.504	0.410	10.41	0.092	2.34	4.50	SPR CG	Z
0.5	12.700	S-1398	0.56	14.224	0.310	7.874	681.00	119.175	0.070	1.778	49.000	217.952	0.400	10.16	0.095	2.41	4.25	SST CG	N
0.5	12.700	3611	0.59	14.986	0.430	10.922	11.00	1.925	0.420	10.668	4.500	20.016	0.180	4.57	0.035	0.89	4.00	MW C	Z
0.5	12.700	12673	0.59	14.986	0.426	10.820	14.00	2.450	0.400	10.160	5.500	24.464	0.190	4.83	0.037	0.94	4.00	MW C	Z
0.5	12.700	O-79	0.59	14.986	0.412	10.465	19.00	3.325	0.350	8.890	6.600	29.357	0.220	5.59	0.044	1.12	5.00	SPR CG	Z
0.5	12.700	A14-55	0.61	15.494	0.420	10.668	19.00	3.325	0.260	6.604	5.000	22.240	0.160	4.06	0.040	1.02	4.00	SPR CG	GI
0.5	12.700	Q-12	0.63	16.002	0.436	11.074	4.30	0.753	0.430	10.922	1.800	8.006	0.190	4.83	0.032	0.81	5.00	SST CG	N
0.5	12.700	A14-46	0.63	16.002	0.424	10.770	13.00	2.275	0.300	7.620	4.000	17.792	0.150	3.81	0.038	0.97	4.00	SST CG	GI
0.5	12.700	PP-94	0.63	16.002	0.424	10.770	12.00	2.100	0.350	8.890	4.300	19.126	0.170	4.32	0.038	0.97	4.50	SPR CG	GI
0.5	12.700	A11-35	0.63	16.002	0.422	10.719	15.00	2.625	0.290	7.366	4.300	19.126	0.160	4.06	0.039	0.99	4.00	SST CG	N
0.5	12.700	AA-74	0.63	16.002	0.420	10.668	13.00	2.275	0.390	9.906	4.900	21.795	0.240	6.10	0.040	1.02	5.00	SPR C	N
0.5	12.700	00-8	0.63	16.002	0.420	10.668	15.00	2.625	0.330	8.382	5.000	22.240	0.180	4.57	0.040	1.02	4.50	SPR CG	N
0.5	12.700	3831	0.63	16.002	0.416	10.566	16.00	2.800	0.370	9.398	5.700	25.354	0.250	6.35	0.042	1.07	5.00	SPR C	Z
0.5	12.700	S-1302	0.63	16.002	0.412	10.465	20.00	3.500	0.310	7.874	6.200	27.578	0.200	5.08	0.044	1.12	4.50	SST CG	N
0.5	12.700	3905	0.63	16.002	0.410	10.414	31.00	5.425	0.230	5.842	7.000	31.136	0.180	4.57	0.045	1.14	4.00	SPR CG	Z
0.5	12.700	A15-4	0.63	16.002	0.404	10.262	20.00	3.500	0.362	9.195	7.200	32.026	0.269	6.83	0.048	1.21	5.60	SST CG	N
0.5	12.700	B14-37	0.63	16.002	0.394	10.008	45.00	5.785	0.220	5.588	10.000	44.480	0.240	6.10	0.053	1.35	4.50	SST CG	GI
0.5	12.700	10976	0.63	16.002	0.392	9.957	55.00	9.625	0.200	5.080	11.000	48.928	0.300	7.62	0.054	1.37	4.50	HD C	Z
0.5	12.700	10102	0.63	16.002	0.376	9.550	126.00	22.050	0.130	3.302	17.000	75.616	0.250	6.35	0.062	1.57	4.00	HD CG	Z
0.5	12.700	2606	0.63	16.002	0.370	9.398	125.00	21.875	0.160	4.064	19.000	84.512	0.290	7					




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h
0.5	12.700	B10-40	0.75 19.050	0.370 9.398	83.00 14.525	0.230 5.842	19.000 84.512	0.370 9.40	0.065 1.65	5.75	SPR	CG Z
0.5	12.700	B14-41	0.75 19.050	0.344 8.738	140.00 24.500	0.210 5.334	29.000 128.992	0.510 12.95	0.078 1.98	6.50	SST	CG N
0.5	12.700	12583	0.75 19.050	0.340 8.636	199.00 34.825	0.170 4.318	34.000 151.232	0.480 12.19	0.080 2.03	6.00	SPR	CG Z
0.5	12.700	K-62	0.75 19.050	0.316 8.026	433.00 75.775	0.110 2.794	48.000 213.504	0.510 12.95	0.092 2.34	5.50	SPR	CG Z
0.5	12.700	S-341	0.78 19.812	0.448 11.379	1.50 0.263	0.630 16.002	0.920 4.092	0.150 3.81	0.026 0.66	5.75	SST	CG N
0.5	12.700	10466	0.78 19.812	0.418 10.617	14.00 2.450	0.380 9.652	5.400 24.019	0.210 5.33	0.041 1.04	5.00	SPR	CG GI
0.5	12.700	3599	0.78 19.812	0.352 8.941	139.00 24.325	0.270 6.858	37.000 164.576	0.440 11.18	0.074 1.88	6.00	MW	CG GI
0.5	12.700	12728	0.81 20.574	0.444 11.278	1.90 0.333	0.600 15.240	1.100 4.893	0.210 5.33	0.028 0.71	6.50	MW	C Z
0.5	12.700	S-167	0.81 20.574	0.442 11.227	2.00 0.350	0.600 15.240	1.200 5.338	0.210 5.33	0.029 0.74	6.25	SST	C N
0.5	12.700	H-51	0.81 20.574	0.432 10.973	5.50 0.963	0.540 13.716	3.000 13.344	0.200 5.08	0.034 0.86	5.00	SST	C N
0.5	12.700	A11-33	0.81 20.574	0.424 10.770	9.00 1.575	0.450 11.430	4.000 17.792	0.190 4.83	0.038 0.97	5.00	SST	CG N
0.5	12.700	S-1572	0.81 20.574	0.412 10.465	17.00 2.975	0.370 9.398	6.200 27.578	0.220 5.59	0.044 1.12	5.00	SST	CG N
0.5	12.700	YY-34	0.81 20.574	0.412 10.465	16.00 2.800	0.370 9.398	6.200 27.578	0.260 6.60	0.044 1.12	5.00	SST	C N
0.5	12.700	JJ-88	0.81 20.574	0.408 10.363	8.90 1.558	0.410 10.414	3.600 16.013	0.400 10.16	0.046 1.17	8.75	SST	CG N
0.5	12.700	B14-29	0.81 20.574	0.394 10.008	42.00 7.350	0.250 6.350	11.000 48.928	0.270 6.86	0.053 1.35	5.00	SPR	CG Z
0.5	12.700	12325	0.81 20.574	0.392 9.957	34.00 5.950	0.330 8.382	11.000 48.928	0.320 8.13	0.054 1.37	6.00	SPR	CG Z
0.5	12.700	K-47	0.81 20.574	0.340 8.636	138.00 24.150	0.230 5.842	31.000 137.888	0.560 14.22	0.080 2.03	7.00	SST	CG N
0.5	12.700	10323	0.81 20.574	0.316 8.026	337.00 58.975	0.140 3.556	48.000 213.504	0.600 15.24	0.092 2.34	6.50	SPR	CG Z
0.5	12.700	A15-40	0.84 21.336	0.432 10.973	3.70 0.648	0.620 15.748	2.300 10.230	0.220 5.59	0.034 0.86	6.50	SST	CG N
0.5	12.700	10836	0.88 22.352	0.464 11.786	0.16 0.028	0.690 17.526	0.110 0.489	0.190 4.83	0.018 0.46	9.50	SST	C N
0.5	12.700	B14-52	0.88 22.352	0.414 10.516	13.00 2.275	0.440 11.176	5.800 25.798	0.280 7.11	0.043 1.09	5.50	SST	C N
0.5	12.700	S-1411	0.88 22.352	0.410 10.414	9.10 1.593	0.470 11.938	4.300 19.126	0.410 10.41	0.045 1.14	8.00	SST	C N
0.5	12.700	N-135	0.88 22.352	0.400 10.160	25.00 4.375	0.360 9.144	9.000 40.032	0.300 7.62	0.050 1.27	6.00	SPR	CG Z
0.5	12.700	S-757	0.88 22.352	0.390 9.906	32.00 5.600	0.340 8.636	11.000 48.928	0.390 9.91	0.055 1.40	6.00	SST	C N
0.5	12.700	3810	0.88 22.352	0.380 9.652	44.00 7.700	0.350 8.890	15.000 66.720	0.420 10.67	0.060 1.52	7.00	SPR	CG GI
0.5	12.700	S-761	0.88 22.352	0.374 9.500	56.00 9.800	0.288 7.315	16.100 71.613	0.460 11.68	0.063 1.59	6.25	SST	C N
0.5	12.700	MM-40	0.88 22.352	0.372 9.449	73.00 12.775	0.250 6.350	19.000 84.512	0.380 9.65	0.064 1.63	6.00	SPR	CG N
0.5	12.700	L-48	0.88 22.352	0.340 8.636	159.00 27.825	0.210 5.334	34.000 151.232	0.640 16.26	0.080 2.03	7.00	SPR	CG Z
0.5	12.700	Z-63	0.88 22.352	0.300 7.620	488.00 85.400	0.120 3.048	57.000 253.536	0.600 15.24	0.100 2.54	6.00	SST	CG N
0.5	12.700	GG-39	0.88 22.352	0.280 7.112	887.00 155.225	0.090 2.286	77.000 342.496	0.660 16.76	0.110 2.79	6.00	SPR	CG Z
0.5	12.700	2819	0.88 22.352	0.230 5.842	2455.00 429.625	0.050 1.270	130.000 578.240	0.810 20.57	0.135 3.43	6.00	SPR	CG Z
0.5	12.700	A9-31	0.91 23.114	0.460 11.684	0.26 0.046	0.710 18.034	0.190 0.845	0.200 5.08	0.020 0.51	9.00	SST	C N
0.5	12.700	S-390	0.91 23.114	0.428 10.871	5.40 0.945	0.640 16.256	3.400 15.123	0.220 5.59	0.036 0.91	6.00	SST	CG N
0.5	12.700	S-1482	0.91 23.114	0.398 10.109	19.00 3.325	0.480 12.192	9.000 40.032	0.360 9.14	0.051 1.30	7.00	SST	CG N
0.5	12.700	A15-30	0.92 23.368	0.420 10.668	10.00 1.750	0.450 11.430	4.700 20.906	0.210 5.33	0.040 1.02	5.25	SST	CG N
0.5	12.700	S-1510	0.94 23.876	0.392 9.957	20.00 3.500	0.450 11.430	9.000 40.032	0.490 12.45	0.054 1.37	8.00	SST	C N
0.5	12.700	10669	0.94 23.876	0.318 8.077	360.00 63.000	0.130 3.302	47.000 209.056	0.640 16.26	0.091 2.31	6.00	SPR	C Z
0.5	12.700	L-31	0.94 23.876	0.300 7.620	372.00 65.100	0.150 3.810	57.000 253.536	0.730 18.54	0.100 2.54	7.25	SST	CG N
0.5	12.700	O-38	0.97 24.638	0.380 9.652	24.00 4.200	0.370 9.398	8.700 38.698	0.600 15.24	0.060 1.52	10.00	SST	C N
0.5	12.700	NN-83	0.97 24.638	0.340 8.636	144.00 25.200	0.230 5.842	34.000 151.232	0.600 15.24	0.080 2.03	7.50	SPR	CG Z
0.5	12.700	3953	1.00 25.400	0.444 11.278	1.40 0.245	0.780 19.812	1.100 4.893	0.220 5.59	0.028 0.71	8.00	MW	CG Z
0.5	12.700	GG-95	1.00 25.400	0.432 10.973	4.70 0.823	0.630 16.002	3.000 13.344	0.220 5.59	0.034 0.86	5.50	SST	C N
0.5	12.700	YY-35	1.00 25.400	0.426 10.820	6.70 1.173	0.550 13.970	3.700 16.458	0.200 5.08	0.037 0.94	5.50	SST	CG N
0.5	12.700	MM-89	1.00 25.400	0.424 10.770	8.70 1.523	0.680 17.272	5.900 26.243	0.250 6.35	0.038 0.97	5.50	MW	C N
0.5	12.700	WW-35	1.00 25.400	0.424 10.770	7.60 1.330	0.560 14.224	4.300 19.126	0.270 6.86	0.038 0.97	6.00	SPR	C Z
0.5	12.700	10056	1.00 25.400	0.422 10.719	9.70 1.698	0.480 12.192	4.600 20.461	0.250 6.35	0.039 0.99	5.50	SPR	CG GI
0.5	12.700	10326	1.00 25.400	0.422 10.719	9.70 1.698	0.660 16.764	6.400 28.467	0.250 6.35	0.039 0.99	5.50	MW	C GI
0.5	12.700	Z-45	1.00 25.400	0.418 10.617	6.50 1.138	0.610 15.494	3.900 17.347	0.390 9.91	0.041 1.04	8.50	SPR	C Z
0.5	12.700	S-755	1.00 25.400	0.416 10.566	10.00 1.750	0.530 13.462	5.400 24.019	0.290 7.37	0.042 1.07	6.00	SST	C N
0.5	12.700	10020	1.00 25.400	0.414 10.516	15.00 2.625	0.420 10.668	6.200 27.578	0.240 6.10	0.043 1.09	5.50	SPR	CG Z
0.5	12.700	A13-7	1.00 25.400	0.408 10.363	17.00 2.975	0.440 11.176	7.500 33.360	0.280 7.11	0.046 1.17	6.00	SPR	CG N
0.5	12.700	3635	1.00 25.400	0.406 10.312	13.00 2.275	0.620 15.748	7.800 34.694	0.380 9.65	0.047 1.19	8.00	HD	CG Z
0.5	12.700	S-1479	1.00 25.400	0.406 10.312	15.00 2.625	0.510 12.954	7.500 33.360	0.350 8.89	0.047 1.19	6.50	SST	C N
0.5	12.700	10069	1.00 25.400	0.404 10.262	18.00 3.150	0.460 11.684	8.500 37.808	0.360 9.14	0.048 1.22	6.50	SPR	C Z
0.5	12.700	O-10	1.00 25.400	0.400 10.160	22.00 3.850	0.410 10.414	9.000 40.032	0.380 9.65	0.050 1.27	6.50	SPR	C Z
0.5	12.700	10041	1.00 25.400	0.398 10.109	13.00 2.275	0.440 11.176	5.900 26.243	0.560 14.22	0.051 1.30	10.00	SPR	C Z
0.5	12.700	2976	1.00 25.400	0.392 9.957	23.00 4.025	0.490 12.446	11.000 48.928	0.430 10.92	0.054 1.37	8.00	SPR	CG Z
0.5	12.700	10146	1.00 25.400	0.390 9.906	31.00 5.425	0.380 9.652	12.000 53.376	0.370 9.40	0.055 1.40	6.75	SPR	CG Z
0.5	12.700	S-758	1.00 25.400	0.390 9.906	27.00 4.725	0.410 10.414	11.000 48.928	0.430 10.92	0.055 1.40	6.75	SST	C N
0.5	12.700	510	1.00 25.400	0.376 9.550	45.00 7.875	0.380 9.652	17.000 75.616	0.540 13.72	0.062 1.57	7.75	HD	C Z
0.5	12.700	S-762	1.00 25.400	0.374 9.500	47.00 8.225	0.343 8.712	16.100 71.613	0.490 12.45	0.063 1.59	6.80	SST	C N
0.5	12.700	3821	1.00 25.400	0.366 9.296	55.00 9.625	0.390 9.906	21.000 93.408	0.570 14.48	0.067 1.70	8.50	SPR	CG Z
0.5	12.700	3897	1.00 25.400	0.356 9.042	82.00 14.350	0.300 7.620	25.000 111.200	0.580 14.73	0.072 1.83	8.00	HD	CG Z
0.5	12.700	2994	1.00 25.400	0.350 8.890	118.00 20.650	0.240 6.096</						




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.5	12.700	3748	1.13	28.702	0.290	7.366	420.00	73.500	0.170	4.318	70.000	311.360	0.920	23.37	0.105	2.67	8.75	SPR CG Z
0.5	12.700	S-112	1.13	28.702	0.230	5.842	1708.00	298.900	0.070	1.778	117.000	520.416	0.950	24.13	0.135	3.43	7.00	SST CG N
0.5	12.700	12650	1.14	28.956	0.410	10.414	10.00	1.750	0.680	17.272	7.000	31.136	0.360	9.14	0.045	1.14	8.00	SPR CG N
0.5	12.700	S-328	1.16	29.464	0.438	11.125	1.60	0.280	0.840	21.336	1.300	5.782	0.320	8.13	0.031	0.79	9.25	SST C N
0.5	12.700	S-499	1.16	29.464	0.422	10.719	7.40	1.295	0.590	14.986	4.300	19.126	0.230	5.84	0.039	0.99	6.00	SST CG N
0.5	12.700	12632	1.17	29.718	0.406	10.312	13.00	2.275	0.790	20.066	10.000	44.480	0.380	9.65	0.047	1.19	8.00	MW CG N
0.5	12.700	3491	1.19	30.226	0.446	11.328	1.40	0.245	0.970	24.638	1.400	6.227	0.220	5.59	0.027	0.69	7.00	MW C Z
0.5	12.700	W-100	1.19	30.226	0.430	10.922	4.10	0.718	0.760	19.304	3.100	13.789	0.260	6.60	0.035	0.89	6.50	SST C N
0.5	12.700	10774	1.19	30.226	0.412	10.465	11.00	1.925	0.580	14.732	6.600	29.357	0.310	7.87	0.044	1.12	7.00	SPR CG Z
0.5	12.700	S-1	1.19	30.226	0.406	10.312	9.60	1.680	0.770	19.558	7.300	32.470	0.420	10.67	0.047	1.19	9.00	SST CG N
0.5	12.700	S-922	1.19	30.226	0.374	9.500	30.00	5.250	0.528	13.411	15.800	70.278	0.662	16.81	0.063	1.59	9.60	SST C N
0.5	12.700	FF-97	1.19	30.226	0.260	6.604	836.00	146.300	0.120	3.048	98.000	435.904	1.020	25.91	0.120	3.05	8.50	SPR CG Z
0.5	12.700	LL-28	1.22	30.988	0.360	9.144	47.00	8.225	0.460	11.684	21.000	93.408	0.720	18.29	0.070	1.78	10.30	SST CG N
0.5	12.700	A14-59	1.23	31.242	0.420	10.668	8.70	1.523	0.570	14.478	5.000	22.240	0.250	6.35	0.040	1.02	6.25	SPR CG Z
0.5	12.700	3619	1.25	31.750	0.442	11.227	0.97	0.170	0.870	22.098	0.850	3.781	0.380	9.65	0.029	0.74	12.00	MW C Z
0.5	12.700	3755	1.25	31.750	0.440	11.176	3.20	0.560	0.960	24.384	3.100	13.789	0.200	5.08	0.030	0.76	5.50	MW CG Z
0.5	12.700	S-756	1.25	31.750	0.416	10.566	8.10	1.418	0.660	16.764	5.400	24.019	0.340	8.64	0.042	1.07	7.00	SST C N
0.5	12.700	3787	1.25	31.750	0.410	10.414	13.00	2.275	0.560	14.224	7.000	31.136	0.360	9.14	0.045	1.14	7.00	SPR C Z
0.5	12.700	RR-70	1.25	31.750	0.402	10.211	9.80	1.715	0.760	19.304	7.500	33.360	0.490	12.45	0.049	1.24	10.00	SST CG N
0.5	12.700	S-759	1.25	31.750	0.390	9.906	21.00	3.675	0.540	13.716	11.000	48.928	0.510	12.95	0.055	1.40	8.25	SST C N
0.5	12.700	S-763	1.25	31.750	0.374	9.500	35.00	6.125	0.460	11.684	16.100	71.613	0.594	15.09	0.063	1.59	8.50	SST CG N
0.5	12.700	3512	1.25	31.750	0.374	9.500	39.00	6.825	0.620	15.748	24.000	106.752	0.630	16.00	0.063	1.60	9.00	MW C Z
0.5	12.700	12197	1.25	31.750	0.352	8.941	93.00	16.275	0.290	7.366	27.000	120.096	0.670	17.02	0.074	1.88	8.00	SPR C Z
0.5	12.700	EE-79	1.25	31.750	0.340	8.636	93.00	16.275	0.360	9.144	34.000	151.232	0.840	21.34	0.080	2.03	10.50	SPR CG Z
0.5	12.700	Y-36	1.31	33.274	0.440	11.176	1.40	0.245	1.000	25.400	1.400	6.227	0.300	7.62	0.030	0.76	10.00	MW CG Z
0.5	12.700	3863	1.31	33.274	0.422	10.719	5.70	0.998	0.820	20.828	4.600	20.461	0.350	8.89	0.039	0.99	8.00	SPR C Z
0.5	12.700	FF-82	1.31	33.274	0.400	10.160	9.90	1.733	0.660	16.764	6.500	28.912	0.650	16.51	0.050	1.27	12.00	SPR C Z
0.5	12.700	L-62	1.31	33.274	0.372	9.449	29.00	5.075	0.540	13.716	16.000	71.168	0.770	19.56	0.064	1.63	12.00	SPR CG Z
0.5	12.700	H-87	1.31	33.274	0.340	8.636	77.00	13.475	0.410	10.414	31.000	137.888	0.880	22.35	0.080	2.03	11.00	SST CG N
0.5	12.700	1605	1.38	35.052	0.454	11.532	0.44	0.077	1.100	27.940	0.480	2.135	0.270	6.86	0.023	0.58	10.50	MW C Z
0.5	12.700	10181	1.38	35.052	0.446	11.328	0.90	0.158	1.100	27.940	0.970	4.315	0.300	7.62	0.027	0.69	10.00	MW C N
0.5	12.700	11347	1.38	35.052	0.444	11.278	1.20	0.210	1.100	27.940	1.400	6.227	0.250	6.35	0.028	0.71	8.00	SST C N
0.5	12.700	I-34	1.38	35.052	0.436	11.074	0.95	0.166	0.850	21.590	0.800	3.558	0.530	13.46	0.032	0.81	15.50	SST C N
0.5	12.700	S-1399	1.38	35.052	0.426	10.820	4.70	0.823	0.780	19.812	3.700	16.458	0.260	6.60	0.037	0.94	7.00	SST C N
0.5	12.700	A15-32	1.38	35.052	0.416	10.566	7.50	1.313	0.720	18.288	5.400	24.019	0.360	9.14	0.042	1.07	7.50	SPR C N
0.5	12.700	YY-29	1.38	35.052	0.402	10.211	9.00	1.575	0.740	18.796	6.700	29.802	0.640	16.26	0.049	1.24	12.00	SPR C Z
0.5	12.700	XX-70	1.38	35.052	0.400	10.160	12.00	2.100	0.730	18.542	9.000	40.032	0.500	12.70	0.050	1.27	10.00	SPR CG Z
0.5	12.700	4161	1.38	35.052	0.398	10.109	13.00	2.275	0.710	18.034	9.500	42.256	0.510	12.95	0.051	1.30	10.00	SPR CG Z
0.5	12.700	3242	1.38	35.052	0.396	10.058	12.00	2.100	0.750	19.050	8.800	39.142	0.620	15.75	0.052	1.32	12.00	SPR CG Z
0.5	12.700	503	1.38	35.052	0.356	9.042	58.00	10.150	0.430	10.922	25.000	111.200	0.830	21.08	0.072	1.83	10.50	HD C Z
0.5	12.700	A15-50	1.41	35.814	0.406	10.312	14.00	2.450	0.580	14.732	8.000	35.584	0.350	8.89	0.047	1.19	7.50	SPR CG GI
0.5	12.700	K-49	1.44	36.576	0.450	11.430	0.87	0.152	1.200	30.480	1.100	4.893	0.230	5.84	0.025	0.64	8.00	MW C N
0.5	12.700	S-1292	1.44	36.576	0.406	10.312	12.00	2.100	0.630	16.002	7.500	33.360	0.400	10.16	0.047	1.19	7.50	SST C N
0.5	12.700	10135	1.50	38.100	0.424	10.770	5.50	0.963	0.770	19.558	4.300	19.126	0.320	8.13	0.038	0.97	7.50	SPR C Z
0.5	12.700	11745	1.50	38.100	0.424	10.770	6.10	1.068	0.700	17.780	4.300	19.126	0.270	6.86	0.038	0.97	7.00	SPR CG Z
0.5	12.700	S-1293	1.50	38.100	0.424	10.770	5.00	0.875	0.790	20.066	4.000	17.792	0.280	7.11	0.038	0.97	7.25	SST CG N
0.5	12.700	3878	1.50	38.100	0.420	10.668	7.60	1.330	0.660	16.764	5.000	22.240	0.320	8.13	0.040	1.02	7.00	SPR C Z
0.5	12.700	521	1.50	38.100	0.418	10.617	5.30	0.928	1.000	25.400	5.400	24.019	0.450	11.43	0.041	1.04	10.00	HD C Z
0.5	12.700	10081	1.50	38.100	0.418	10.617	7.30	1.278	0.730	18.542	5.400	24.019	0.320	8.13	0.041	1.04	7.75	SPR CG GI
0.5	12.700	B6-1	1.50	38.100	0.418	10.617	6.80	1.190	0.740	18.796	5.000	22.240	0.350	8.89	0.041	1.04	7.50	SST C N
0.5	12.700	S-1290	1.50	38.100	0.418	10.617	6.40	1.120	0.790	20.066	5.000	22.240	0.320	8.13	0.041	1.04	7.75	SST CG N
0.5	12.700	S-1296	1.50	38.100	0.418	10.617	4.10	0.718	1.000	25.400	4.300	19.126	0.450	11.43	0.041	1.04	11.00	SST CG N
0.5	12.700	S-806	1.50	38.100	0.418	10.617	4.10	0.718	1.000	25.400	4.300	19.126	0.450	11.43	0.041	1.04	11.00	SST CG N
0.5	12.700	S-122	1.50	38.100	0.406	10.312	8.20	1.435	0.910	23.114	7.500	33.360	0.470	11.94	0.047	1.19	10.00	SST CG N
0.5	12.700	11421	1.50	38.100	0.396	10.058	11.00	1.925	0.850	21.590	9.500	42.256	0.650	16.51	0.052	1.32	12.50	HD CG Z
0.5	12.700	S-247	1.50	38.100	0.396	10.058	14.00	2.450	0.700	17.780	9.500	42.256						




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
0.5	12.700	B14-55	1.69	42.926	0.410	10.414	6.30	1.103	1.100	27.940	7.000	31.136	0.540	13.72	0.045	1.14	12.00	SPR	CG	N
0.5	12.700	A10-58	1.72	43.688	0.394	10.008	13.00	2.275	0.840	21.336	11.000	48.928	0.640	16.26	0.053	1.35	12.00	SPR	CG	N
0.5	12.700	QQ-58	1.75	44.450	0.420	10.668	3.40	0.595	1.200	30.480	4.100	18.237	0.560	14.22	0.040	1.02	13.00	MW	C	Z
0.5	12.700	511	1.75	44.450	0.376	9.550	24.00	4.200	0.720	18.288	17.000	75.616	0.850	21.59	0.062	1.57	12.80	HD	C	Z
0.5	12.700	JJ-89	1.75	44.450	0.368	9.347	34.00	5.950	0.590	14.986	20.000	88.960	0.840	21.34	0.066	1.68	11.80	SPR	C	N
0.5	12.700	359	1.75	44.450	0.356	9.042	43.00	7.525	0.570	14.478	25.000	111.200	1.030	26.16	0.072	1.83	13.30	HD	C	Z
0.5	12.700	11582	1.75	44.450	0.354	8.992	48.00	8.400	0.540	13.716	26.000	115.648	1.020	25.91	0.073	1.85	13.00	SPR	CG	N
0.5	12.700	10311	1.81	45.974	0.384	9.754	13.00	2.275	0.840	21.336	11.000	48.928	0.970	24.64	0.058	1.47	16.80	SPR	CG	Z
0.5	12.700	K-99	1.81	45.974	0.356	9.042	35.00	6.125	0.660	16.764	23.000	102.304	1.150	29.21	0.072	1.83	16.00	SPR	CG	GI
0.5	12.700	B14-69	1.84	46.736	0.322	8.179	144.00	25.200	0.320	8.128	46.000	204.608	0.980	24.89	0.089	2.26	11.00	SPR	CG	Z
0.5	12.700	QQ-53	1.88	47.752	0.406	10.312	6.30	1.103	1.200	30.480	7.400	32.915	0.710	18.03	0.047	1.19	14.00	HD	C	Z
0.5	12.700	3580	1.88	47.752	0.396	10.058	8.90	1.558	1.100	27.940	9.700	43.146	0.790	20.07	0.052	1.32	15.00	HD	CG	Z
0.5	12.700	A12-40	1.88	47.752	0.394	10.008	11.00	1.925	0.950	24.130	10.000	44.480	0.660	16.76	0.053	1.35	12.50	SST	CG	N
0.5	12.700	3608	1.88	47.752	0.392	9.957	9.20	1.610	0.900	22.860	8.300	36.918	0.970	24.64	0.054	1.37	17.00	SPR	C	Z
0.5	12.700	10384	1.88	47.752	0.380	9.652	15.00	2.625	0.800	20.320	12.000	53.376	1.080	27.43	0.060	1.52	17.00	SPR	C	Z
0.5	12.700	11772	1.91	48.514	0.440	11.176	1.40	0.245	1.600	40.640	2.300	10.230	0.300	7.62	0.030	0.76	10.00	MW	CG	GI
0.5	12.700	10603	1.91	48.514	0.392	9.957	14.00	2.450	0.820	20.828	11.000	48.928	0.650	16.51	0.054	1.37	12.00	SPR	CG	Z
0.5	12.700	12317	1.91	48.514	0.374	9.500	32.00	5.600	0.550	13.970	18.000	80.064	0.720	18.29	0.063	1.60	10.50	SPR	C	Z
0.5	12.700	12724	1.92	48.768	0.438	11.125	1.60	0.280	1.600	40.640	2.600	11.565	0.310	7.87	0.031	0.79	10.00	MW	CG	GI
0.5	12.700	4232	1.94	49.276	0.356	9.042	55.00	9.625	0.450	11.430	25.000	111.200	0.860	21.84	0.072	1.83	11.00	SPR	C	Z
0.5	12.700	K-53	1.97	50.038	0.406	10.312	5.60	0.980	1.200	30.480	6.900	30.691	0.730	18.54	0.047	1.19	15.50	SPR	CG	Z
0.5	12.700	FF-55	2.00	50.800	0.424	10.770	2.60	0.455	1.500	38.100	4.000	17.792	0.490	12.45	0.038	0.97	12.00	SST	CG	N
0.5	12.700	B10-63	2.00	50.800	0.420	10.668	4.70	0.823	1.100	27.940	5.000	22.240	0.440	11.18	0.040	1.02	10.00	SPR	C	Z
0.5	12.700	3994	2.00	50.800	0.418	10.617	3.00	0.525	1.300	33.020	3.900	17.347	0.700	17.78	0.041	1.04	16.00	SPR	C	Z
0.5	12.700	0-95	2.00	50.800	0.408	10.363	5.10	0.893	1.300	33.020	6.600	29.357	0.710	18.03	0.046	1.17	15.50	SPR	CG	Z
0.5	12.700	15	2.00	50.800	0.406	10.312	7.20	1.260	1.100	27.940	8.000	35.584	0.640	16.26	0.047	1.19	12.50	HD	C	Z
0.5	12.700	2721	2.00	50.800	0.406	10.312	5.80	1.015	1.200	30.480	7.200	32.026	0.750	19.05	0.047	1.19	15.00	HD	C	Z
0.5	12.700	AA-87	2.00	50.800	0.400	10.160	5.90	1.033	1.200	30.480	6.900	30.691	0.830	21.08	0.050	1.27	16.50	SST	CG	N
0.5	12.700	12233	2.00	50.800	0.388	9.855	13.00	2.275	0.970	24.638	13.000	57.824	0.810	20.57	0.056	1.42	14.50	SPR	CG	GI
0.5	12.700	3004	2.00	50.800	0.376	9.550	24.00	4.200	0.700	17.780	17.000	75.616	0.780	19.81	0.062	1.57	12.50	SPR	CG	Z
0.5	12.700	S-765	2.00	50.800	0.374	9.500	21.00	3.675	0.767	19.482	16.100	71.613	0.865	21.97	0.063	1.59	12.80	SST	CG	N
0.5	12.700	4215	2.00	50.800	0.372	9.449	34.00	5.950	0.540	13.716	19.000	84.512	0.740	18.80	0.064	1.63	10.50	SPR	C	Z
0.5	12.700	504	2.00	50.800	0.356	9.042	38.00	6.650	0.650	16.510	25.000	111.200	1.150	29.21	0.072	1.83	15.00	HD	C	Z
0.5	12.700	2652	2.03	51.562	0.462	11.735	0.14	0.025	1.700	43.180	0.240	1.068	0.290	7.37	0.019	0.48	14.30	MW	C	Z
0.5	12.700	3160	2.03	51.562	0.362	9.195	28.00	4.900	0.820	20.828	23.000	102.304	1.140	28.96	0.069	1.75	16.50	SPR	CG	Z
0.5	12.700	12684	2.06	52.324	0.330	8.382	91.00	15.925	0.610	15.494	56.000	249.088	1.150	29.21	0.085	2.16	13.50	MW	CG	Z
0.5	12.700	S-39	2.13	54.102	0.406	10.312	3.10	0.543	1.000	25.400	3.100	13.789	1.100	27.94	0.047	1.19	23.50	SST	CG	N
0.5	12.700	3558	2.13	54.102	0.402	10.211	11.00	1.925	1.100	27.940	13.000	57.824	0.490	12.45	0.049	1.24	10.00	MW	CG	Z
0.5	12.700	Q-61-A	2.13	54.102	0.388	9.855	10.00	1.750	1.100	27.940	12.000	53.376	0.870	22.10	0.056	1.42	15.50	SST	CG	N
0.5	12.700	10033	2.19	55.626	0.312	7.925	124.00	21.700	0.410	10.414	51.000	226.848	1.460	37.08	0.094	2.39	15.50	SPR	CG	Z
0.5	12.700	YY-62	2.25	57.150	0.460	11.684	0.23	0.040	2.000	50.800	0.460	2.046	0.220	5.59	0.020	0.51	10.00	SST	C	N
0.5	12.700	4322	2.25	57.150	0.340	8.636	69.00	12.075	0.490	12.446	34.000	151.232	1.080	27.43	0.080	2.03	13.50	SPR	CG	Z
0.5	12.700	12020	2.31	58.674	0.398	10.109	13.00	2.275	0.710	18.034	9.500	42.256	0.510	12.95	0.051	1.30	10.00	SPR	CG	Z
0.5	12.700	3776	2.31	58.674	0.356	9.042	32.00	5.600	0.780	19.812	25.000	111.200	1.260	32.00	0.072	1.83	17.50	HD	CG	GI
0.5	12.700	J-34	2.31	58.674	0.356	9.042	58.00	10.150	0.430	10.922	25.000	111.200	0.760	19.30	0.072	1.83	10.50	HD	CG	Z
0.5	12.700	3159	2.38	60.452	0.372	9.449	20.00	3.500	0.910	23.114	19.000	84.512	1.040	26.42	0.064	1.63	16.30	SPR	CG	Z
0.5	12.700	10042	2.38	60.452	0.366	9.296	34.00	5.950	0.620	15.748	21.000	93.408	0.900	22.86	0.067	1.70	12.50	SPR	C	Z
0.5	12.700	4266	2.44	61.976	0.376	9.550	17.00	2.975	0.980	24.892	17.000	75.616	1.040	26.42	0.062	1.57	16.80	SPR	CG	Z
0.5	12.700	12599	2.50	63.500	0.424	10.770	3.00	0.525	1.900	48.260	5.900	26.243	0.490	12.45	0.038	0.97	12.00	MW	C	Z
0.5	12.700	EE-59	2.50	63.500	0.400	10.160	13.00	2.275	0.680	17.272	9.000	40.032	0.480	12.19	0.050	1.27	9.50	SPR	CG	N
0.5	12.700	24	2.50	63.500	0.376	9.550	16.00	2.800	1.100	27.940	17.000	75.616	1.180	29.97	0.062	1.57	18.00	HD	C	Z
0.5	12.700	3035	2.50	63.500	0.376	9.550	21.00	3.675	0.800	20.320	17.000	75.616	0.870	22.10	0.062	1.57	14.00	SPR	CG	Z
0.5	12.700	S-1133	2.50	63.500	0.376	9.550	13.00	2.275	1.218	30.937	15.800	70.278	1.283	32.59	0.063	1.59	19			




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
0.5	12.700	K-37	4.75 120.650	0.318 8.077	40.00 7.000	1.200 30.480	47.000 209.056	3.460 87.88	0.091 2.31	38.00	SPR CG	GI
0.5	12.700	12690	5.50 139.700	0.406 10.312	2.40 0.420	3.300 83.820	8.000 35.584	1.600 40.64	0.047 1.19	33.00	HD C	BO
0.5	12.700	B15-55	5.50 139.700	0.406 10.312	2.60 0.455	3.100 78.740	8.000 35.584	1.460 37.08	0.047 1.19	31.00	SPR CG	Z
0.5	12.700	3251	5.50 139.700	0.364 9.246	8.90 1.558	2.400 60.960	22.000 97.856	3.060 77.72	0.068 1.73	45.00	SPR CG	Z
0.5	12.700	12218	5.94 150.876	0.336 8.534	42.00 7.350	0.850 21.590	36.000 160.128	1.890 48.01	0.082 2.08	23.00	SPR CG	Z
0.5	12.700	S-1277	6.50 165.100	0.392 9.957	3.20 0.560	3.400 86.360	11.000 48.928	2.160 54.86	0.054 1.37	40.00	SST CG	N
0.5	12.700	12688	9.00 228.600	0.376 9.550	4.20 0.735	4.000 101.600	17.000 75.616	3.910 99.31	0.062 1.57	62.00	SPR C	Z
0.5	12.700	3998	10.50 266.700	0.356 9.042	7.40 1.295	3.300 83.820	25.000 111.200	4.930 125.22	0.072 1.83	68.50	SPR CG	Z
0.5	12.700	880	12.00 304.800	0.376 9.550	3.10 0.543	5.400 137.160	17.000 75.616	5.240 133.10	0.062 1.57	83.50	HD C	Z
0.5	12.700	886	12.00 304.800	0.340 8.636	9.00 1.575	3.800 96.520	34.000 151.232	7.340 186.44	0.080 2.03	90.80	HD C	Z
0.5	12.700	3155	14.00 355.600	0.392 9.957	1.90 0.333	5.900 149.860	11.000 48.928	4.030 102.36	0.054 1.37	74.00	SPR C	Z
0.5	12.700	514	16.00 406.400	0.392 9.957	1.40 0.245	8.200 208.280	11.000 48.928	5.590 141.99	0.054 1.37	102.00	HD C	Z
0.515	13.081	V-21	0.50 12.700	0.371 9.423	296.00 51.800	0.080 2.032	24.000 106.752	0.250 6.35	0.072 1.83	3.50	SPR CG	GI
0.515	13.081	0-115	0.56 14.224	0.437 11.100	8.90 1.558	0.330 8.382	2.900 12.899	0.230 5.84	0.039 0.99	5.00	SST C	N
0.515	13.081	B15-16	0.56 14.224	0.355 9.017	318.00 55.650	0.100 2.540	33.000 146.784	0.340 8.64	0.080 2.03	4.25	SPR CG	N
0.515	13.081	B15-65	0.63 16.002	0.481 12.217	0.78 0.137	0.550 13.970	0.430 1.913	0.070 1.78	0.017 0.43	3.25	MW C	Z
0.515	13.081	B2-41	0.63 16.002	0.443 11.252	2.40 0.420	0.270 6.858	0.630 2.802	0.360 9.14	0.036 0.91	10.00	SST CG	N
0.515	13.081	3258	0.63 16.002	0.345 8.763	629.00 110.075	0.060 1.524	39.000 173.472	0.380 9.65	0.085 2.16	3.50	SPR C	Z
0.515	13.081	2657	0.69 17.526	0.345 8.763	290.00 50.750	0.130 3.302	39.000 173.472	0.450 11.43	0.085 2.16	5.25	SPR CG	Z
0.515	13.081	3136	0.75 19.050	0.407 10.338	36.00 6.300	0.310 7.874	11.000 48.928	3.000 7.62	0.054 1.37	5.50	SPR CG	Z
0.515	13.081	W-37	0.75 19.050	0.407 10.338	25.00 4.375	0.370 9.398	9.300 41.366	3.800 9.65	0.054 1.37	7.00	SPR CG	Z
0.515	13.081	2640	0.78 19.812	0.391 9.931	87.00 15.225	0.260 6.604	23.000 102.304	0.290 7.37	0.062 1.57	4.75	MW CG	Z
0.515	13.081	3389	0.81 20.574	0.391 9.931	57.00 9.975	0.290 7.366	16.000 71.168	0.370 9.40	0.062 1.57	6.00	SPR CG	Z
0.515	13.081	DD-96	0.81 20.574	0.355 9.017	131.00 22.925	0.230 5.842	31.000 137.888	0.540 13.72	0.080 2.03	6.75	SST CG	N
0.515	13.081	FF-20	0.88 22.352	0.455 11.557	3.10 0.543	0.690 17.526	2.200 9.786	0.190 4.83	0.030 0.76	5.25	MW C	Z
0.515	13.081	Y-23	0.88 22.352	0.415 10.541	22.00 3.850	0.390 9.906	8.700 38.698	0.300 7.62	0.050 1.27	6.00	SPR CG	N
0.515	13.081	S-1060	0.88 22.352	0.405 10.287	20.00 3.500	0.440 11.176	8.500 37.808	0.440 11.18	0.055 1.40	8.00	SST CG	N
0.515	13.081	3841	0.94 23.876	0.331 8.407	272.00 47.600	0.170 4.318	47.000 209.056	0.640 16.26	0.092 2.34	7.00	HD CG	GI
0.515	13.081	00-79	0.97 24.638	0.435 11.049	4.60 0.805	0.630 16.002	2.900 12.899	0.340 8.64	0.040 1.02	8.50	SST CG	N
0.515	13.081	KK-48	1.00 25.400	0.455 11.557	3.40 0.595	0.850 21.590	2.900 12.899	0.150 3.81	0.030 0.76	5.00	MW CG	N
0.515	13.081	B3-36	1.00 25.400	0.443 11.252	6.80 1.190	0.720 18.288	4.900 21.795	0.230 5.84	0.036 0.91	5.25	MW C	N
0.515	13.081	K-29	1.00 25.400	0.419 10.643	10.00 1.750	0.591 15.011	5.900 26.243	0.409 10.39	0.048 1.21	8.50	SST CG	N
0.515	13.081	WW-43	1.00 25.400	0.379 9.627	63.00 11.025	0.340 8.636	22.000 97.856	0.580 14.73	0.068 1.73	7.50	SPR C	Z
0.515	13.081	S-1171	1.00 25.400	0.355 9.017	124.00 21.700	0.250 6.350	31.000 137.888	0.560 14.22	0.080 2.03	7.00	SST CG	N
0.515	13.081	Y-30	1.06 26.924	0.453 11.506	2.00 0.350	0.810 20.574	1.600 7.117	0.250 6.35	0.031 0.79	8.00	MW CG	Z
0.515	13.081	10838	1.06 26.924	0.447 11.354	2.40 0.420	0.750 19.050	1.800 8.006	0.320 8.13	0.034 0.86	9.25	SPR CG	Z
0.515	13.081	12481	1.06 26.924	0.425 10.795	7.60 1.330	0.590 14.986	4.500 20.016	0.470 11.94	0.045 1.14	9.50	MW C	N
0.515	13.081	11107	1.13 28.702	0.457 11.608	1.50 0.263	0.860 21.844	1.300 5.782	0.260 6.60	0.029 0.74	8.00	MW C	Z
0.515	13.081	S-235	1.13 28.702	0.453 11.506	1.40 0.245	0.810 20.574	1.100 4.893	0.320 8.13	0.031 0.79	9.25	SST C	N
0.515	13.081	2715	1.13 28.702	0.387 9.830	48.00 8.400	0.520 13.208	25.000 111.200	0.480 12.19	0.064 1.63	7.50	MW CG	Z
0.515	13.081	S-1051	1.13 28.702	0.305 7.747	367.00 64.225	0.170 4.318	63.000 280.224	0.840 21.34	0.105 2.67	8.00	SST CG	N
0.515	13.081	B10-64	1.16 29.464	0.379 9.627	53.00 9.275	0.410 10.414	22.000 97.856	0.580 14.73	0.068 1.73	8.50	SPR CG	Z
0.515	13.081	S-1613	1.19 30.226	0.407 10.338	14.00 2.450	0.650 16.510	9.000 40.032	0.540 13.72	0.054 1.37	10.00	SST CG	N
0.515	13.081	11338	1.19 30.226	0.341 8.661	175.00 30.625	0.240 6.096	42.000 186.816	0.780 19.81	0.087 2.21	8.00	SPR CG	Z
0.515	13.081	S-1032	1.25 31.750	0.459 11.659	0.42 0.074	0.750 19.050	0.310 1.379	0.500 12.70	0.028 0.71	18.00	SST CG	N
0.515	13.081	3972	1.25 31.750	0.391 9.931	48.00 8.400	0.340 8.636	16.000 71.168	0.420 10.67	0.062 1.57	6.75	SPR CG	Z
0.515	13.081	10460	1.30 33.020	0.397 10.084	27.00 4.725	0.490 12.446	13.000 57.824	0.470 11.94	0.059 1.50	8.00	SST CG	N
0.515	13.081	2526	1.38 35.052	0.427 10.846	9.40 1.645	0.680 17.272	6.400 28.467	0.370 9.40	0.044 1.12	7.50	SPR C	Z
0.515	13.081	3535	1.41 35.814	0.421 10.693	12.00 2.100	0.870 22.098	11.000 48.928	0.350 8.89	0.047 1.19	7.50	MW CG	Z
0.515	13.081	10809	1.50 38.100	0.485 12.319	0.08 0.014	1.400 35.560	0.110 0.489	0.150 3.81	0.015 0.38	9.00	MW C	N
0.515	13.081	2560	1.50 38.100	0.451 11.455	1.70 0.298	1.200 30.480	2.000 8.896	0.320 8.13	0.032 0.81	10.00	HD CG	Z
0.515	13.081	Z-24	1.50 38.100	0.451 11.455	2.70 0.473	0.980 24.892	2.600 11.565	0.260 6.60	0.032 0.81	7.00	SPR C	Z
0.515	13.081	10718	1.50 38.100	0.433 10.998	5.70 0.998	0.920 23.368	5.200 23.130	0.400 10.16	0.041 1.04	8.75	SPR C	Z
0.515	13.081	S-1139	1.50 38.100	0.411 10.439	9.20 1.610	0.820 20.828	7.600 33.805	0.680 17.27	0.052 1.32	12.00	SST C	N
0.515	13.081	2709	1.53 38.862	0.361 9.169	69.00 12.075	0.430 10.922	29.000 128.992	0.830 21.08	0.077 1.96	10.80	SPR CG	Z
0.515	13.081	10178	1.56 39.624	0.433 10.998	3.20 0.560	0.990 25.146	3.100 13.789	0.570 14.48	0.041 1.04	14.00	SPR CG	Z
0.515	13.081	S-407	1.56 39.624	0.433 10.998	4.20 0.735	1.100 27.940	4.700 20.906	0.450 11.43	0.041 1.04	10.00	SST C	N
0.515	13.081	2513	1.56 39.624	0.395 10.033	22.00 3.850	0.900 22.860	20.000 88.960	0.660 16.76	0.060 1.52	11.00	MW CG	Z
0.515	13.081	3046	1.56 39.624	0.355 9.017	79.00 13.825	0.410 10.414	33.000 146.784	0.880 22.35	0.080 2.03	11.00	SPR CG	Z
0.515	13.081	S-1162	1.63 41.402	0.439 11.151	2.50 0.438	1.200 30.480	2.900 12.899	0.480 12.19	0.038 0.97	11.50	SST C	N
0.515	13.081	3924	1.63 41.402	0.391 9.931	25.00 4.375	0.650 16.510	16.000 71.168	0.740 18.80	0.062 1.57	11.00	HD C	Z
0.515	13.081	2696	1.63 41.402	0.381 9.677	36.00 6.300	0.800 20.320	29.000 128.992	0.740 18.80	0.067 1.70	11.00	MW CG	Z
0.515	13.081	12292	1.66 42.164	0.399 10.135	17.00 2.975	0.790 20.066	14.000 62.272</					




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends C CG O	Fnsh C Z CG N
0.515	13.081	3140	2.75 69.850	0.437 11.100	4.20 0.735	1.100 27.940	4.500 20.016	0.400 10.16	0.039 0.99	9.25	SPR	C Z
0.515	13.081	12300	3.00 76.200	0.395 10.033	11.00 1.925	1.400 35.560	15.000 66.720	1.200 30.48	0.060 1.52	20.00	SPR	CG Z
0.515	13.081	2510	3.25 82.550	0.399 10.135	12.00 2.100	1.600 40.640	19.000 84.512	0.960 24.38	0.058 1.47	16.50	MW	CG Z
0.515	13.081	B-26	3.28 83.312	0.433 10.998	3.80 0.665	1.400 35.560	5.200 23.130	0.530 13.46	0.041 1.04	12.00	HD	C N
0.515	13.081	11557	3.59 91.186	0.387 9.830	12.00 2.100	1.500 38.100	18.000 80.064	1.600 40.64	0.064 1.63	24.00	SPR	CG N
0.515	13.081	10928	4.00 101.600	0.347 8.814	40.00 7.000	0.950 24.130	38.000 169.024	2.140 54.36	0.084 2.13	24.50	SPR	C Z
0.515	13.081	10705	5.31 134.874	0.315 8.001	54.00 9.450	1.100 27.940	60.000 266.880	3.900 99.06	0.100 2.54	39.00	SPR	CG Z
0.515	13.081	11517	5.50 139.700	0.421 10.693	2.40 0.420	3.300 83.820	7.800 34.694	1.500 38.10	0.047 1.19	31.00	SPR	CG Z
0.515	13.081	12298	6.00 152.400	0.421 10.693	3.60 0.630	2.200 55.880	7.800 34.694	0.990 25.15	0.047 1.19	21.00	SPR	CG Z
0.515	13.081	11431	7.63 193.802	0.411 10.439	1.80 0.315	4.300 109.220	7.600 33.805	3.300 83.82	0.052 1.32	62.50	HD	C Z
0.515	13.081	1609	8.50 215.900	0.391 9.931	5.30 0.928	3.100 78.740	16.000 71.168	2.790 70.87	0.062 1.57	45.00	SPR	CG Z
0.515	13.081	S-188	8.75 222.250	0.391 9.931	4.60 0.805	3.408 86.563	15.700 69.834	2.922 74.22	0.063 1.59	46.80	SST	CG N
0.515	13.081	1809	12.00 304.800	0.391 9.931	2.90 0.508	7.000 177.800	20.000 88.960	5.020 127.51	0.062 1.57	80.00	MW	C Z
0.531	13.487	N-81	0.28 7.112	0.437 11.100	62.00 10.850	0.120 3.048	7.600 33.805	0.140 3.56	0.047 1.19	3.00	SPR	CG N
0.531	13.487	3050	0.31 7.874	0.467 11.862	12.00 2.100	0.210 5.334	2.500 11.120	0.100 2.54	0.032 0.81	3.00	SPR	CG Z
0.531	13.487	2851	0.44 11.176	0.485 12.319	1.50 0.263	0.320 8.128	0.500 2.224	0.120 3.05	0.023 0.58	4.00	MW	C Z
0.531	13.487	B10-36	0.44 11.176	0.441 11.201	19.00 3.325	0.220 5.588	4.200 18.682	0.210 5.33	0.045 1.14	4.75	SPR	CG Z
0.531	13.487	I-14	0.50 12.700	0.441 11.201	30.00 5.250	0.210 5.334	6.200 27.578	0.160 4.06	0.045 1.14	3.50	SST	CG N
0.531	13.487	S-17	0.50 12.700	0.437 11.100	27.00 4.725	0.260 6.604	7.100 31.581	0.190 4.83	0.047 1.19	4.00	SST	CG N
0.531	13.487	PP-32	0.56 14.224	0.387 9.830	107.00 18.725	0.150 3.810	16.000 71.168	0.410 10.41	0.072 1.83	5.75	SPR	CG Z
0.531	13.487	S-823	0.63 16.002	0.481 12.217	0.75 0.131	0.430 10.922	0.320 1.423	0.200 5.08	0.025 0.64	7.00	SST	C N
0.531	13.487	2670	0.63 16.002	0.465 11.811	6.90 1.208	0.400 10.160	2.800 12.454	0.170 4.32	0.033 0.84	4.00	SPR	C Z
0.531	13.487	M-131	0.63 16.002	0.459 11.659	5.90 1.033	0.450 11.430	2.600 11.565	0.180 4.57	0.036 0.91	5.00	SST	CG N
0.531	13.487	L-35	0.63 16.002	0.407 10.338	73.00 12.775	0.209 5.309	15.200 67.610	0.284 7.21	0.063 1.59	4.50	SST	CG N
0.531	13.487	F-54	0.66 16.764	0.405 10.287	88.00 15.400	0.190 4.826	17.000 75.616	0.280 7.11	0.063 1.60	4.50	HD	CG Z
0.531	13.487	YY-58	0.69 17.526	0.463 11.760	7.80 1.365	0.390 9.906	3.000 13.344	0.170 4.32	0.034 0.86	4.00	SPR	C GI
0.531	13.487	N-132	0.69 17.526	0.407 10.338	69.00 12.075	0.230 5.842	16.000 71.168	0.310 7.87	0.062 1.57	5.00	SPR	CG Z
0.531	13.487	3906	0.72 18.288	0.451 11.455	7.80 1.365	0.440 11.176	3.400 15.123	0.280 7.11	0.040 1.02	6.00	SPR	C Z
0.531	13.487	CC-53	0.75 19.050	0.467 11.862	4.00 0.700	0.560 14.224	2.300 10.230	0.190 4.83	0.032 0.81	5.00	MW	C Z
0.531	13.487	2586	0.75 19.050	0.449 11.405	14.00 2.450	0.510 12.954	7.000 31.136	0.180 4.57	0.041 1.04	4.50	MW	CG Z
0.531	13.487	4269	0.75 19.050	0.437 11.100	15.00 2.625	0.420 10.668	6.500 28.912	0.330 8.38	0.047 1.19	6.00	SPR	C Z
0.531	13.487	B11-51	0.75 19.050	0.403 10.236	53.00 9.275	0.310 7.874	16.000 71.168	0.380 9.65	0.064 1.63	6.00	SST	CG N
0.531	13.487	10260	0.75 19.050	0.349 8.865	386.00 67.550	0.110 2.794	44.000 195.712	0.460 11.68	0.091 2.31	5.00	SPR	CG Z
0.531	13.487	1953	0.78 19.812	0.487 12.370	0.68 0.119	0.630 16.002	0.430 1.913	0.150 3.81	0.022 0.56	5.75	MW	C Z
0.531	13.487	S-919	0.78 19.812	0.387 9.830	99.00 17.325	0.220 5.588	22.000 97.856	0.400 10.16	0.072 1.83	5.50	SST	CG N
0.531	13.487	2592	0.78 19.812	0.321 8.153	646.00 113.050	0.100 2.540	67.000 298.016	0.580 14.73	0.105 2.67	5.50	SPR	CG Z
0.531	13.487	B11-37	0.81 20.574	0.467 11.862	4.00 0.700	0.630 16.002	2.500 11.120	0.160 4.06	0.032 0.81	5.00	SPR	CG N
0.531	13.487	S-446	0.81 20.574	0.407 10.338	72.00 12.600	0.212 5.385	15.200 67.610	0.276 7.01	0.063 1.59	4.40	SST	CG N
0.531	13.487	2787	0.81 20.574	0.345 8.763	320.00 56.000	0.150 3.810	47.000 209.056	0.560 14.22	0.093 2.36	6.00	SPR	C Z
0.531	13.487	2559	0.84 21.336	0.423 10.744	23.00 4.025	0.470 11.938	10.000 44.480	0.380 9.65	0.054 1.37	7.00	HD	CG Z
0.531	13.487	V-29	0.84 21.336	0.407 10.338	45.00 7.875	0.339 8.611	15.200 67.610	0.383 9.73	0.063 1.59	6.10	SST	CG N
0.531	13.487	S-895	0.88 22.352	0.467 11.862	3.50 0.613	0.670 17.018	2.400 10.675	0.160 4.06	0.032 0.81	5.00	SST	CG N
0.531	13.487	10734	0.88 22.352	0.449 11.405	8.60 1.505	0.590 14.986	5.100 22.685	0.250 6.35	0.041 1.04	6.00	SPR	C Z
0.531	13.487	3836	0.88 22.352	0.427 10.846	32.00 5.600	0.300 7.620	9.500 42.256	0.310 7.87	0.052 1.32	5.00	SPR	C Z
0.531	13.487	2636	0.91 23.114	0.417 10.592	28.00 4.900	0.440 11.176	12.000 53.376	0.400 10.16	0.057 1.45	7.00	MW	CG Z
0.531	13.487	JJ-17	0.94 23.876	0.471 11.963	1.90 0.333	0.700 17.780	1.300 5.782	0.240 6.10	0.030 0.76	7.00	MW	C Z
0.531	13.487	S-1412	0.94 23.876	0.449 11.405	8.60 1.505	0.550 13.970	4.700 20.906	0.230 5.84	0.041 1.04	5.50	SST	CG N
0.531	13.487	2896	0.94 23.876	0.429 10.897	22.00 3.850	0.410 10.414	9.000 40.032	0.360 9.14	0.051 1.30	6.00	SPR	C Z
0.531	13.487	A12-12	1.00 25.400	0.471 11.963	1.60 0.280	0.740 18.796	1.200 5.338	0.260 6.60	0.030 0.76	7.75	MW	C N
0.531	13.487	A12-30	1.00 25.400	0.471 11.963	1.50 0.263	0.730 18.542	1.100 4.893	0.270 6.86	0.030 0.76	8.00	MW	C Z
0.531	13.487	11204	1.00 25.400	0.467 11.862	1.70 0.298	0.700 17.780	1.200 5.338	0.300 7.62	0.032 0.81	8.25	SST	C N
0.531	13.487	S-81	1.00 25.400	0.443 11.252	10.00 1.750	0.570 14.478	5.800 25.798	0.310 7.87	0.044 1.12	6.00	SST	C N
0.531	13.487	11208	1.00 25.400	0.407 10.338	33.00 5.775	0.462 11.735	15.200 67.610	0.476 12.09	0.063 1.59	7.60	SST	CG N
0.531	13.487	S-916	1.00 25.400	0.405 10.287	64.00 11.200	0.238 6.045	15.200 67.610	0.306 7.77	0.063 1.59	4.90	SST	CG N
0.531	13.487	10034	1.00 25.400	0.381 9.677	120.00 21.000	0.220 5.588	26.000 115.648	0.450 11.43	0.075 1.91	6.00	SPR	CG Z
0.531	13.487	11200	1.03 26.162	0.469 11.913	1.60 0.280	0.750 19.050	1.200 5.338	0.280 7.11	0.031 0.79	8.00	SST	C N
0.531	13.487	B10-39	1.03 26.162	0.441 11.201	8.90 1.558	0.680 17.272	6.100 27.133	0.350 8.89	0.045 1.14	7.75	SPR	CG N
0.531	13.487	12401	1.03 26.162	0.321 8.153	432.00 75.600	0.150 3.810	67.000 298.016	0.730 18.54	0.105 2.67	7.00	SPR	C N
0.531	13.487	12497	1.06 26.924	0.473 12.014	1.40 0.245	0.810 20.574	1.100 4.893	0.250 6.35	0.029 0.74	7.75	MW	C N
0.531	13.487	10691	1.06 26.924	0.463 11.760	2.00 0.350	0.720 18.288	1.400 6.227	0.340 8.64	0.034 0.86	10.00	SPR	CG Z
0.531	13.487	B12-47	1.13 28.702	0.405 10.287	47.00 8.225	0.360 9.144	17.000 75.616	0.430 10.92	0.063 1.60	6.75	SPR	CG N
0.531	13.487	1751	1.13 28.702	0.281 7.137	1234.00 215.950	0.080 2.032	105.000 467.040	0.780 19.81	0.125 3.18	6.25	SPR	C Z
0.531	13.487	S-57	1.19 30.226	0.437 11.100	7.80 1.365							




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h								
0.531	13.487	S-1487	1.50	38.100	0.477	12.116	1.20	0.210	1.200	30.480	1,400	6.227	0.200	5.08	0.027	0.69	6.50	SST	C	N
0.531	13.487	10137	1.50	38.100	0.461	11.709	3.50	0.613	0.890	22.606	3,200	14.234	0.280	7.11	0.035	0.89	7.00	SPR	C	Z
0.531	13.487	S-1509	1.50	38.100	0.461	11.709	1.70	0.298	1.100	27.940	1,800	8.006	0.420	10.67	0.035	0.89	11.00	SST	C	N
0.531	13.487	B5-46	1.50	38.100	0.443	11.252	8.90	1.558	0.700	17.780	6,200	27.578	0.320	8.13	0.044	1.12	7.25	SPR	CG	N
0.531	13.487	3477	1.50	38.100	0.421	10.693	14.00	2.450	0.830	21.082	11,000	48.928	0.610	15.49	0.055	1.40	11.00	SPR	CG	Z
0.531	13.487	4390	1.50	38.100	0.327	8.306	282.00	49.350	0.220	5.588	61,000	271.328	0.920	23.37	0.102	2.59	9.00	SPR	CG	Z
0.531	13.487	2904	1.56	39.624	0.361	9.169	107.00	18.725	0.350	8.890	38,000	169.024	0.840	21.34	0.085	2.16	10.00	SPR	CG	Z
0.531	13.487	QO-30	1.63	41.402	0.483	12.268	0.49	0.086	1.400	35.560	0.680	3.025	0.230	5.84	0.024	0.61	8.50	SST	C	N
0.531	13.487	3415	1.63	41.402	0.467	11.862	2.00	0.350	1.300	33.020	2,500	11.120	0.290	7.37	0.032	0.81	8.00	HD	C	Z
0.531	13.487	3478	1.63	41.402	0.445	11.303	3.50	0.613	1.000	25.400	3,600	16.013	0.600	15.24	0.043	1.09	14.00	SPR	CG	Z
0.531	13.487	I-58	1.63	41.402	0.411	10.439	19.00	3.325	0.700	17.780	14,000	62.272	0.600	15.24	0.060	1.52	10.00	SST	CG	N
0.531	13.487	11390	1.63	41.402	0.401	10.185	28.00	4.900	0.650	16.510	18,000	80.064	0.720	18.29	0.065	1.65	11.00	SPR	CG	Z
0.531	13.487	10303	1.63	41.402	0.371	9.423	61.00	10.675	0.520	13.208	32,000	142.336	1.000	25.40	0.080	2.03	12.50	SPR	CG	Z
0.531	13.487	11246	1.66	42.164	0.407	10.338	21.00	3.675	0.770	19.558	16,000	71.168	0.740	18.80	0.062	1.57	12.00	SPR	CG	Z
0.531	13.487	11134	1.69	42.926	0.431	10.947	8.10	1.418	1.000	25.400	8,500	37.808	0.600	15.24	0.050	1.27	12.00	SPR	CG	GI
0.531	13.487	FF-32	1.75	44.450	0.471	11.963	1.30	0.228	1.500	38.100	1,900	8,451	0.300	7.62	0.030	0.76	9.00	MW	C	N
0.531	13.487	10629	1.78	45.212	0.403	10.236	22.00	3.850	0.810	20.574	18,000	80.064	0.830	21.08	0.064	1.63	13.00	SPR	CG	Z
0.531	13.487	12519	1.88	47.752	0.467	11.862	2.10	0.368	1.600	40.640	3,400	15.123	0.280	7.11	0.032	0.81	7.75	MW	C	GI
0.531	13.487	2901	1.88	47.752	0.391	9.931	31.00	5.425	0.710	18.034	22,000	97.856	0.950	24.13	0.070	1.78	13.50	SPR	CG	Z
0.531	13.487	3974	1.88	47.752	0.347	8.814	119.00	20.825	0.390	30.99	46,000	204.608	1.220	30.99	0.092	2.34	12.30	SPR	C	Z
0.531	13.487	U-46	2.00	50.800	0.449	11.405	2.50	0.438	1.400	35.560	3,600	16.013	0.570	14.48	0.041	1.04	14.00	SST	CG	N
0.531	13.487	3671	2.03	51.562	0.385	9.779	42.00	7.350	0.570	14.478	24,000	106.752	0.950	24.13	0.073	1.85	12.00	SPR	C	Z
0.531	13.487	11938	2.09	53.086	0.367	9.322	53.00	9.275	0.640	16.256	34,000	151.232	1.270	32.26	0.082	2.08	15.50	SPR	CG	Z
0.531	13.487	S-3129	2.13	54.102	0.466	11.836	1.10	0.193	1.700	43.180	1,800	8,006	0.400	10.16	0.033	0.84	12.00	SST	C	N
0.531	13.487	11761	2.19	55.626	0.413	10.490	14.00	2.450	0.960	24.384	14,000	62.272	0.800	20.32	0.059	1.50	13.50	SPR	CG	Z
0.531	13.487	10532	2.22	56.388	0.383	9.728	30.00	5.250	0.860	21.844	25,000	111.200	1.280	32.51	0.074	1.88	17.30	SPR	CG	Z
0.531	13.487	S-968	2.25	57.150	0.405	10.287	9.60	1.680	0.855	21.717	8,200	36.474	1.395	35.43	0.063	1.59	21.00	SST	C	N
0.531	13.487	4364	2.38	60.452	0.407	10.338	15.00	2.625	1.000	25.400	16,000	71.168	0.960	24.38	0.062	1.57	15.50	SPR	CG	Z
0.531	13.487	S-1367	2.44	61.976	0.407	10.338	16.00	2.800	0.952	24.181	15,200	67.610	0.850	21.59	0.063	1.59	13.60	SST	CG	N
0.531	13.487	10743	2.50	63.500	0.469	11.913	1.90	0.333	1.700	43.180	3,200	14.234	0.260	6.60	0.031	0.79	7.50	MW	C	GI
0.531	13.487	2967	2.50	63.500	0.449	11.405	4.10	0.718	1.200	30.480	5,100	22.685	0.470	11.94	0.041	1.04	10.50	SPR	C	Z
0.531	13.487	11818	2.50	63.500	0.407	10.338	16.00	2.800	1.000	25.400	16,000	71.168	0.930	23.62	0.062	1.57	15.00	SPR	CG	Z
0.531	13.487	11547	2.81	71.374	0.401	10.185	13.00	2.275	1.400	35.560	18,000	80.064	1.380	35.05	0.065	1.65	21.30	SPR	CG	Z
0.531	13.487	S-3089	2.88	73.152	0.407	10.338	6.80	1.190	0.988	25.095	6,700	29.802	1.892	48.06	0.063	1.59	29.00	SST	C	N
0.531	13.487	12067	3.38	85.852	0.359	9.119	64.00	11.200	0.620	15.748	39,000	173.472	1.380	35.05	0.086	2.18	16.00	SPR	CG	Z
0.531	13.487	3676	3.44	87.376	0.395	10.033	14.00	2.450	1.500	38.100	21,000	93.408	1.630	41.40	0.068	1.73	24.00	SPR	CG	Z
0.531	13.487	3699	4.06	103.124	0.405	10.287	9.50	1.663	1.800	45.720	17,000	75.616	1.590	40.39	0.063	1.60	25.30	SPR	CG	GI
0.531	13.487	11234	4.13	104.902	0.437	11.100	3.30	0.578	2.300	58.420	7,600	33.805	0.960	24.38	0.047	1.19	20.50	SPR	CG	Z
0.531	13.487	11243	4.19	106.426	0.407	10.338	14.00	2.450	1.200	30.480	16,000	71.168	1.050	26.67	0.062	1.57	17.00	HD	CG	Z
0.531	13.487	S-1566	4.81	122.174	0.333	8.458	74.00	12.950	0.687	17.450	51,000	226.848	2,077	52.76	0.098	2.49	21.00	SST	CG	N
0.531	13.487	2770	5.75	146.050	0.337	8.560	43.00	7.525	1.200	30.480	53,000	235.744	3,720	94.49	0.097	2.46	38.00	SPR	CG	Z
0.531	13.487	10824	6.25	158.750	0.403	10.236	5.80	1.015	3.000	76.200	18,000	80.064	2,720	69.09	0.064	1.63	42.50	SPR	CG	Z
0.531	13.487	12273	6.50	165.100	0.437	11.100	3.30	0.578	2.300	58.420	7,600	33.805	0.990	25.15	0.047	1.19	21.00	SPR	CG	Z
0.54	13.716	71633	0.50	12.700	0.458	11.633	21.00	3.675	0.330	8.382	6,900	30.691	0.140	3.56	0.041	1.04	3.50	MW	CG	N
0.54	13.716	71633S	0.50	12.700	0.458	11.633	18.00	3.150	0.260	6.604	4,700	20.906	0.140	3.56	0.041	1.04	3.50	SST	CG	N
0.54	13.716	71646	0.50	12.700	0.448	11.379	31.00	5.425	0.310	7.874	9,700	43.146	0.170	4.32	0.046	1.17	3.75	MW	CG	N
0.54	13.716	71646S	0.50	12.700	0.448	11.379	26.00	4.550	0.250	6.350	6,500	28.912	0.170	4.32	0.046	1.17	3.75	SST	CG	N
0.54	13.716	71659	0.50	12.700	0.432	10.973	57.00	9.975	0.250	6.350	15,000	66.720	0.210	5.33	0.054	1.37	3.88	MW	CG	N
0.54	13.716	71659S	0.50	12.700	0.432	10.973	49.00	4.900	0.320	5.080	9,800	43.590	0.210	5.33	0.054	1.37	3.88	SST	CG	N
0.54	13.716	71672	0.50	12.700	0.424	10.770	76.00	13.300	0.240	6.096	18,000	80.064	0.220	5.59	0.058	1.47	3.88	MW	CG	N
0.54	13.716	71685S	0.50	12.700	0.414	10.516	90.00	15.750	0.167	4.242	15,000	66.720	0.247	6.27	0.063	1.59	3.90	SST	CG	N
0.54	13.716	71685	0.50	12.700	0.414	10.516	105.00	18,375	0.220	5.588	23,000	102,304	0.250	6.35	0.063	1.60	4.00	MW	CG	N
0.54	13.716	71698	0.50	12.700	0.406	10.3														




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
0.54	13.716	71636S	0.88 22.352	0.458 11.633	9.50 1.663	0.490 12.446	4.700 20.906	0.200 5.08	0.041 1.04	4.88	SST	CG N
0.54	13.716	71649	0.88 22.352	0.448 11.379	16.00 2.800	0.590 14.986	9.700 43.146	0.240 6.10	0.046 1.17	5.25	MW	CG N
0.54	13.716	71649S	0.88 22.352	0.448 11.379	14.00 2.450	0.470 11.938	6.500 28.912	0.240 6.10	0.046 1.17	5.25	SST	CG N
0.54	13.716	71662	0.88 22.352	0.432 10.973	29.00 5.075	0.500 12.700	15.000 66.720	0.300 7.62	0.054 1.37	5.63	MW	CG N
0.54	13.716	71662S	0.88 22.352	0.432 10.973	25.00 4.375	0.400 10.160	9.800 43.590	0.300 7.62	0.054 1.37	5.63	SST	CG N
0.54	13.716	71675	0.88 22.352	0.424 10.770	38.00 6.650	0.470 11.938	18.000 80.064	0.330 8.38	0.058 1.47	5.75	MW	CG N
0.54	13.716	71675S	0.88 22.352	0.424 10.770	33.00 5.775	0.370 9.398	12.000 53.376	0.330 8.38	0.058 1.47	5.75	SST	CG N
0.54	13.716	71688S	0.88 22.352	0.414 10.516	45.00 7.875	0.333 8.458	15.000 66.720	0.368 9.35	0.063 1.59	5.90	SST	CG N
0.54	13.716	71688	0.88 22.352	0.414 10.516	53.00 9.275	0.430 10.922	23.000 102.304	0.380 9.65	0.063 1.60	6.00	MW	CG N
0.54	13.716	71701	0.88 22.352	0.406 10.312	68.00 11.900	0.410 10.414	27.000 120.096	0.400 10.16	0.067 1.70	6.00	MW	CG N
0.54	13.716	71701S	0.88 22.352	0.406 10.312	57.00 9.975	0.320 8.128	19.000 84.512	0.400 10.16	0.067 1.70	6.00	SST	CG N
0.54	13.716	71637	1.00 25.400	0.458 11.633	9.70 1.698	0.710 18.034	6.900 30.691	0.220 5.59	0.041 1.04	5.38	MW	CG N
0.54	13.716	71637S	1.00 25.400	0.458 11.633	8.20 1.435	0.570 14.478	4.700 20.906	0.220 5.59	0.041 1.04	5.38	SST	CG N
0.54	13.716	71650	1.00 25.400	0.448 11.379	14.00 2.450	0.690 17.526	9.700 43.146	0.260 6.60	0.046 1.17	5.75	MW	CG N
0.54	13.716	71650S	1.00 25.400	0.448 11.379	12.00 2.100	0.550 13.970	6.500 28.912	0.260 6.60	0.046 1.17	5.75	SST	CG N
0.54	13.716	71663	1.00 25.400	0.432 10.973	25.00 4.375	0.580 14.732	15.000 66.720	0.340 8.64	0.054 1.37	6.25	MW	CG N
0.54	13.716	71663S	1.00 25.400	0.432 10.973	21.00 3.675	0.460 11.684	9.800 43.590	0.340 8.64	0.054 1.37	6.25	SST	CG N
0.54	13.716	71676	1.00 25.400	0.424 10.770	33.00 5.775	0.540 13.716	18.000 80.064	0.370 9.40	0.058 1.47	6.38	MW	CG N
0.54	13.716	71676S	1.00 25.400	0.424 10.770	28.00 4.900	0.430 10.922	12.000 53.376	0.370 9.40	0.058 1.47	6.38	SST	CG N
0.54	13.716	71689S	1.00 25.400	0.414 10.516	38.00 6.650	0.395 10.033	15.000 66.720	0.413 10.49	0.063 1.59	6.60	SST	CG N
0.54	13.716	71689	1.00 25.400	0.414 10.516	45.00 7.875	0.510 12.954	23.000 102.304	0.420 10.67	0.063 1.60	6.63	MW	CG N
0.54	13.716	71702	1.00 25.400	0.406 10.312	58.00 10.150	0.470 11.938	27.000 120.096	0.450 11.43	0.067 1.70	6.75	MW	CG N
0.54	13.716	71702S	1.00 25.400	0.406 10.312	49.00 8.575	0.380 9.652	19.000 84.512	0.450 11.43	0.067 1.70	6.75	SST	CG N
0.54	13.716	71638	1.25 31.750	0.458 11.633	7.60 1.330	0.910 23.114	6.900 30.691	0.260 6.60	0.041 1.04	6.25	MW	CG N
0.54	13.716	71638S	1.25 31.750	0.458 11.633	6.50 1.138	0.720 18.288	4.700 20.906	0.260 6.60	0.041 1.04	6.25	SST	CG N
0.54	13.716	71652	1.25 31.750	0.448 11.379	11.00 1.925	0.870 22.098	9.700 43.146	0.320 8.13	0.046 1.17	6.88	MW	CG N
0.54	13.716	71652S	1.25 31.750	0.448 11.379	9.40 1.645	0.700 17.780	6.500 28.912	0.320 8.13	0.046 1.17	6.88	SST	CG N
0.54	13.716	71664	1.25 31.750	0.432 10.973	20.00 3.500	0.740 18.796	15.000 66.720	0.400 10.16	0.054 1.37	7.38	MW	CG N
0.54	13.716	71664S	1.25 31.750	0.432 10.973	17.00 2.975	0.590 14.986	9.800 43.590	0.400 10.16	0.054 1.37	7.38	SST	CG N
0.54	13.716	71677	1.25 31.750	0.424 10.770	26.00 4.550	0.700 17.780	18.000 80.064	0.440 11.18	0.058 1.47	7.63	MW	CG N
0.54	13.716	71677S	1.25 31.750	0.424 10.770	22.00 3.850	0.560 14.224	12.000 53.376	0.440 11.18	0.058 1.47	7.63	SST	CG N
0.54	13.716	71690S	1.25 31.750	0.414 10.516	30.00 5.250	0.500 12.700	15.000 66.720	0.490 12.45	0.063 1.59	7.80	SST	CG N
0.54	13.716	71690	1.25 31.750	0.414 10.516	35.00 6.125	0.650 16.510	23.000 102.304	0.500 12.70	0.063 1.60	8.00	MW	CG N
0.54	13.716	71703	1.25 31.750	0.406 10.312	45.00 7.875	0.610 15.494	27.000 120.096	0.540 13.72	0.067 1.70	8.13	MW	CG N
0.54	13.716	71703S	1.25 31.750	0.406 10.312	38.00 6.650	0.490 12.446	19.000 84.512	0.540 13.72	0.067 1.70	8.13	SST	CG N
0.54	13.716	71639	1.50 38.100	0.458 11.633	6.30 1.103	1.100 27.940	6.900 30.691	0.300 7.62	0.041 1.04	7.25	MW	CG N
0.54	13.716	71639S	1.50 38.100	0.458 11.633	5.30 0.928	0.880 22.352	4.700 20.906	0.300 7.62	0.041 1.04	7.25	SST	CG N
0.54	13.716	71651	1.50 38.100	0.448 11.379	9.10 1.593	1.100 27.940	9.700 43.146	0.360 9.14	0.046 1.17	7.88	MW	CG N
0.54	13.716	71651S	1.50 38.100	0.448 11.379	7.70 1.348	0.850 21.590	6.500 28.912	0.360 9.14	0.046 1.17	7.88	SST	CG N
0.54	13.716	71665	1.50 38.100	0.432 10.973	16.00 2.800	0.900 22.860	15.000 66.720	0.470 11.94	0.054 1.37	8.63	MW	CG N
0.54	13.716	71665S	1.50 38.100	0.432 10.973	14.00 2.450	0.720 18.288	9.800 43.590	0.470 11.94	0.054 1.37	8.63	SST	CG N
0.54	13.716	71678	1.50 38.100	0.424 10.770	21.00 3.675	0.850 21.590	18.000 80.064	0.510 12.95	0.058 1.47	8.88	MW	CG N
0.54	13.716	71678S	1.50 38.100	0.424 10.770	18.00 3.150	0.680 17.272	12.000 53.376	0.510 12.95	0.058 1.47	8.88	SST	CG N
0.54	13.716	71691S	1.50 38.100	0.414 10.516	24.00 4.200	0.625 15.875	15.000 66.720	0.581 14.76	0.063 1.59	9.30	SST	CG N
0.54	13.716	71691	1.50 38.100	0.414 10.516	29.00 5.075	0.800 20.320	23.000 102.304	0.580 14.73	0.063 1.60	9.25	MW	CG N
0.54	13.716	71704	1.50 38.100	0.406 10.312	37.00 6.475	0.750 19.050	27.000 120.096	0.640 16.26	0.067 1.70	9.50	MW	CG N
0.54	13.716	71704S	1.50 38.100	0.406 10.312	31.00 5.425	0.600 15.240	19.000 84.512	0.640 16.26	0.067 1.70	9.50	SST	CG N
0.54	13.716	71640	1.75 44.450	0.458 11.633	5.30 0.928	1.300 33.020	6.900 30.691	0.330 8.38	0.041 1.04	8.13	MW	CG N
0.54	13.716	71640S	1.75 44.450	0.458 11.633	4.50 0.788	1.000 25.400	4.700 20.906	0.330 8.38	0.041 1.04	8.13	SST	CG N
0.54	13.716	71653	1.75 44.450	0.448 11.379	7.70 1.348	1.300 33.020	9.700 43.146	0.410 10.41	0.046 1.17	8.88	MW	CG N
0.54	13.716	71653S	1.75 44.450	0.448 11.379	6.60 1.155	1.000 25.400	6.500 28.912	0.410 10.41	0.046 1.17	8.88	SST	CG N
0.54	13.716	71666	1.75 44.450	0.432 10.973	14.00 2.450	1.100 27.940	15.000 66.720	0.530 13.46	0.054 1.37	9.75	MW	CG N
0.54	13.716	71666S	1.75 44.450	0.432 10.973	12.00 2.100	0.850 21.590	9.800 43.590	0.530 13.46	0.054 1.37	9.75	SST	CG N
0.54	13.716	71679	1.75 44.450	0.424 10.770	18.00 3.150	1.000 25.400	18.000 80.064	0.590 14.99	0.058 1.47	10.10	MW	CG N
0.54	13.716	71679S	1.75 44.450	0.424 10.770	15.00 2.625	0.800 20.320	12.000 53.376	0.590 14.99	0.058 1.47	10.10	SST	CG N
0.54	13.716	71692S	1.75 44.450	0.414 10.516	21.00 3.675	0.714 18.136	15.000 66.720	0.646 16.41	0.063 1.59	10.30	SST	CG N
0.54	13.716	71692	1.75 44.450	0.414 10.516	24.00 4.200	0.940 23.876	23.000 102.304	0.670 17.02	0.063 1.60	10.60	MW	CG N
0.54	13.716	71705	1.75 44.450	0.406 10.312	31.00 5.425	0.880 22.352	27.000 120.096	0.730 18.54	0.067 1.70	10.90	MW	CG N
0.54	13.716	71705S	1.75 44.450	0.406 10.312	26.00 4.550	0.700 17.780	19.000 84.512	0.730 18.54	0.067 1.70	10.90	SST	CG N
0.54	13.716	71641	2.00 50.800	0.458 11.633	4.60 0.805	1.500 38.100	6.900 30.691	0.370 9.40	0.041 1.04	9.13	MW	CG N
0.54	13.716	71641S	2.00 50.800	0.458 11.633	3.90 0.683	1.200 30.480	4.700 20.906	0.370 9.40	0.041 1.04	9.13	SST	CG N
0.54	13.716	71654	2.00 50.800	0.448 11.379	5.70 0.998	1.100 27.940	6.500 28.912	0.460 11.68	0.046 1.17	10.00	SST	CG N
0.54	13.716	71667	2.00 50.800	0.432 10.973	1							




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.54	13.716	71694	2.25	57.150	0.414	10.516	19.00	3.325	1.200	30.480	23.000	102.304	0.830	21.08	0.063	1.60	13.30	MW CG N
0.54	13.716	71707	2.25	57.150	0.406	10.312	24.00	4.200	1.200	30.480	27.000	120.096	0.910	23.11	0.067	1.70	13.60	MW CG N
0.54	13.716	71707S	2.25	57.150	0.406	10.312	20.00	3.500	0.920	23.368	19.000	84.512	0.910	23.11	0.067	1.70	13.60	SST CG N
0.54	13.716	71643	2.50	63.500	0.458	11.633	3.70	0.648	1.900	48.260	6.900	30.691	0.450	11.43	0.041	1.04	10.90	MW CG N
0.54	13.716	71643S	2.50	63.500	0.458	11.633	3.10	0.543	1.500	38.100	4.700	20.906	0.450	11.43	0.041	1.04	10.90	SST CG N
0.54	13.716	71656	2.50	63.500	0.448	11.379	5.30	0.928	1.800	45.720	9.700	43.146	0.550	13.97	0.046	1.17	12.00	MW CG N
0.54	13.716	71656S	2.50	63.500	0.448	11.379	4.50	0.788	1.400	35.560	6.500	28.912	0.550	13.97	0.046	1.17	12.00	SST CG N
0.54	13.716	71669	2.50	63.500	0.432	10.973	9.40	1.645	1.500	38.100	15.000	66.720	0.720	18.29	0.054	1.37	13.40	MW CG N
0.54	13.716	71669S	2.50	63.500	0.432	10.973	8.00	1.400	1.200	30.480	9.800	43.590	0.720	18.29	0.054	1.37	13.40	SST CG N
0.54	13.716	71682	2.50	63.500	0.424	10.770	12.00	2.100	1.500	38.100	18.000	80.064	0.800	20.32	0.058	1.47	13.90	MW CG N
0.54	13.716	71682S	2.50	63.500	0.424	10.770	10.00	1.750	1.200	30.480	12.000	53.376	0.800	20.32	0.058	1.47	13.90	SST CG N
0.54	13.716	71695S	2.50	63.500	0.414	10.516	14.00	2.450	1.071	27.203	15.000	66.720	0.907	23.04	0.063	1.59	14.50	SST CG N
0.54	13.716	71695	2.50	63.500	0.414	10.516	17.00	2.975	1.400	35.560	23.000	102.304	0.920	23.37	0.063	1.60	14.60	MW CG N
0.54	13.716	71708	2.50	63.500	0.406	10.312	21.00	3.675	1.300	33.020	27.000	120.096	1.010	25.65	0.067	1.70	15.00	MW CG N
0.54	13.716	71708S	2.50	63.500	0.406	10.312	18.00	3.150	1.000	25.400	19.000	84.512	1.010	25.65	0.067	1.70	15.00	SST CG N
0.54	13.716	71644	2.75	69.850	0.458	11.633	3.30	0.578	2.100	53.340	6.900	30.691	0.490	12.45	0.041	1.04	11.90	MW CG N
0.54	13.716	71644S	2.75	69.850	0.458	11.633	2.80	0.490	1.600	40.640	4.700	20.906	0.490	12.45	0.041	1.04	11.90	SST CG N
0.54	13.716	71657	2.75	69.850	0.448	11.379	4.80	0.840	2.000	50.800	9.700	43.146	0.600	15.24	0.046	1.17	13.10	MW CG N
0.54	13.716	71657S	2.75	69.850	0.448	11.379	4.10	0.718	1.600	40.640	6.500	28.912	0.600	15.24	0.046	1.17	13.10	SST CG N
0.54	13.716	71670	2.75	69.850	0.432	10.973	8.50	1.488	1.700	43.180	15.000	66.720	0.780	19.81	0.054	1.37	14.50	MW CG N
0.54	13.716	71670S	2.75	69.850	0.432	10.973	7.20	1.260	1.400	35.560	9.800	43.590	0.780	19.81	0.054	1.37	14.50	SST CG N
0.54	13.716	71683	2.75	69.850	0.424	10.770	11.00	1.925	1.600	40.640	18.000	80.064	0.880	22.35	0.058	1.47	15.30	MW CG N
0.54	13.716	71683S	2.75	69.850	0.424	10.770	9.40	1.645	1.300	33.020	12.000	53.376	0.880	22.35	0.058	1.47	15.30	SST CG N
0.54	13.716	71696S	2.75	69.850	0.414	10.516	13.00	2.275	1.154	29.312	15.000	66.720	0.967	24.56	0.063	1.59	15.50	SST CG N
0.54	13.716	71696	2.75	69.850	0.414	10.516	15.00	2.625	1.500	38.100	23.000	102.304	1.000	25.40	0.063	1.60	15.90	MW CG N
0.54	13.716	71709	2.75	69.850	0.406	10.312	19.00	3.325	1.400	35.560	27.000	120.096	1.100	27.94	0.067	1.70	16.40	MW CG N
0.54	13.716	71709S	2.75	69.850	0.406	10.312	16.00	2.800	1.100	27.940	19.000	84.512	1.100	27.94	0.067	1.70	16.40	SST CG N
0.54	13.716	71645	3.00	76.200	0.458	11.633	3.00	0.525	2.300	58.420	6.900	30.691	0.520	13.21	0.041	1.04	12.80	MW CG N
0.54	13.716	71645S	3.00	76.200	0.458	11.633	2.60	0.455	1.800	45.720	4.700	20.906	0.520	13.21	0.041	1.04	12.80	SST CG N
0.54	13.716	71658	3.00	76.200	0.448	11.379	4.40	0.770	2.200	55.880	9.700	43.146	0.650	16.51	0.046	1.17	14.10	MW CG N
0.54	13.716	71658S	3.00	76.200	0.448	11.379	3.70	0.648	1.700	43.180	6.500	28.912	0.650	16.51	0.046	1.17	14.10	SST CG N
0.54	13.716	71671	3.00	76.200	0.432	10.973	7.80	1.365	1.900	48.260	15.000	66.720	0.850	21.59	0.054	1.37	15.80	MW CG N
0.54	13.716	71671S	3.00	76.200	0.432	10.973	6.60	1.155	1.500	38.100	9.800	43.590	0.850	21.59	0.054	1.37	15.80	SST CG N
0.54	13.716	71684	3.00	76.200	0.424	10.770	10.00	1.750	1.800	45.720	18.000	80.064	0.950	24.13	0.058	1.47	16.40	MW CG N
0.54	13.716	71684S	3.00	76.200	0.424	10.770	8.60	1.505	1.400	35.560	12.000	53.376	0.950	24.13	0.058	1.47	16.40	SST CG N
0.54	13.716	71697S	3.00	76.200	0.414	10.516	12.00	2.100	1.250	31.750	15.000	66.720	1.037	26.34	0.063	1.59	16.60	SST CG N
0.54	13.716	71697	3.00	76.200	0.414	10.516	14.00	2.450	1.700	43.180	23.000	102.304	1.090	27.69	0.063	1.60	17.30	MW CG N
0.54	13.716	71710	3.00	76.200	0.406	10.312	18.00	3.150	1.600	40.640	27.000	120.096	1.180	29.97	0.067	1.70	17.60	MW CG N
0.54	13.716	71710S	3.00	76.200	0.406	10.312	15.00	2.625	1.200	30.480	19.000	84.512	1.180	29.97	0.067	1.70	17.60	SST CG N
0.546	13.868	S-56	0.28	7.112	0.484	12.294	4.30	0.753	0.130	3.302	0.540	2.402	0.160	4.06	0.031	0.79	4.00	SST C N
0.546	13.868	A9-48	0.31	7.874	0.454	11.532	23.00	4.025	0.130	3.302	2.900	12.899	0.180	4.57	0.046	1.17	4.00	SST CG N
0.546	13.868	YY-68	0.31	7.874	0.422	10.719	187.00	32.725	0.080	2.032	16.000	71.168	0.190	4.83	0.062	1.57	3.00	SPR CG Z
0.546	13.868	S-830	0.34	8.636	0.436	11.074	49.00	8.575	0.120	3.048	6.100	27.133	0.220	5.59	0.055	1.40	4.00	SST CG N
0.546	13.868	K-27	0.38	9.652	0.452	11.481	49.00	8.575	0.140	3.556	6.900	30.691	0.140	3.56	0.047	1.19	3.00	SST CG N
0.546	13.868	MM-60	0.41	10.414	0.446	11.328	44.00	7.700	0.180	4.572	7.800	34.694	0.180	4.57	0.050	1.27	3.50	SST CG N
0.546	13.868	G-91	0.41	10.414	0.414	10.516	123.00	21.525	0.140	3.556	18.000	80.064	0.250	6.35	0.066	1.68	3.75	SST CG N
0.546	13.868	12194	0.41	10.414	0.346	8.788	1080.00	189.000	0.050	1.270	57.000	253.536	0.350	8.89	0.100	2.54	3.50	SPR CG Z
0.546	13.868	B6-8	0.44	11.176	0.500	12.700	1.10	0.193	0.330	8.382	0.380	1.690	0.100	2.54	0.023	0.58	4.50	MW CG N
0.546	13.868	B1-21	0.44	11.176	0.450	11.430	55.00	9.625	0.126	3.200	7.000	31.136	0.171	4.34	0.048	1.21	2.60	SST C N
0.546	13.868	S-1114	0.44	11.176	0.446	11.328	64.00	11.200	0.120	3.048	7.800	34.694	0.150	3.81	0.050	1.27	3.00	SST CG N
0.546	13.868	B7-8	0.47	11.938	0.456	11.582	24.00	4.200	0.260	6.604	6.100	27.133	0.170	4.32	0.045	1.14	3.75	SST CG N
0.546	13.868	S-1579	0.50	12.700	0.452	11.481	33.00	5.775	0.210	5.334	6.900	30.691	0.160	4.06	0.047	1.19	3.50	SST CG N
0.546	13.868	A14-34	0.53	13.462	0.436	11.074	49.00	8.575	0.210	5.334	10.000	44.480	0.220	5.59	0.055	1.40	4.00	SST CG N
0.546	13.868	GG-80	0.53	13.462	0.346	8.788	1080.00	189.000	0.050	1.270	57.000	253.536	0.350	8.89	0.100	2.54	3.50	SPR CG N
0.546	13.868	S-1370	0.56	14.224	0.506	12.852	0.34	0.060	0.420	10.668	0.140	0.623	0.140	3.56	0.020	0.		




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
0.546	13.868	L-26	0.88 22.352	0.402 10.211	84.00 14.700	0.250 6.350	21.000 93.408	0.410 10.41	0.072 1.83	5.75	SST	CG N
0.546	13.868	S-869	0.94 23.876	0.484 12.294	2.10 0.368	0.750 19.050	1.600 7.117	0.190 4.83	0.031 0.79	6.00	SST	CG N
0.546	13.868	10176	0.94 23.876	0.452 11.481	7.50 1.313	0.440 11.176	3.300 14.678	0.490 12.45	0.047 1.19	9.50	SPR	C Z
0.546	13.868	S-1061	1.00 25.400	0.472 11.989	5.90 1.033	0.570 14.478	3.400 15.123	0.220 5.59	0.037 0.94	5.00	SST	C N
0.546	13.868	A15-27	1.00 25.400	0.456 11.582	12.00 2.100	0.510 12.954	6.100 27.133	0.250 6.35	0.045 1.14	5.50	SST	CG N
0.546	13.868	S-271	1.00 25.400	0.438 11.125	18.00 3.150	0.550 13.970	9.700 43.146	0.380 9.65	0.054 1.37	7.00	SST	CG N
0.546	13.868	B1-55	1.00 25.400	0.434 11.024	29.00 5.075	0.400 10.160	12.000 53.376	0.340 8.64	0.056 1.42	6.00	SPR	CG GI
0.546	13.868	YY-70	1.00 25.400	0.412 10.465	59.00 10.325	0.330 8.382	20.000 88.960	0.440 11.18	0.067 1.70	6.50	SPR	CG Z
0.546	13.868	12327	1.09 27.686	0.426 10.820	32.00 5.600	0.440 11.176	14.000 62.272	0.420 10.67	0.060 1.52	7.00	SPR	CG GI
0.546	13.868	B9-32	1.13 28.702	0.468 11.887	5.70 0.998	0.750 19.050	4.200 18.682	0.250 6.35	0.039 0.99	6.50	SPR	CG Z
0.546	13.868	VV-65	1.13 28.702	0.422 10.719	37.00 6.475	0.410 10.414	16.000 71.168	0.430 10.92	0.062 1.57	7.00	SPR	CG N
0.546	13.868	AA-86	1.13 28.702	0.366 9.296	126.00 22.050	0.310 7.874	39.000 173.472	0.810 20.57	0.090 2.29	9.00	SST	CG N
0.546	13.868	10630	1.16 29.464	0.488 12.395	1.30 0.228	0.920 23.368	1.200 5.338	0.230 5.84	0.029 0.74	7.00	SST	C N
0.546	13.868	H-36	1.19 30.226	0.484 12.294	0.62 0.109	0.640 16.256	0.390 1.735	0.550 13.97	0.031 0.79	17.80	MW	CG N
0.546	13.868	A15-68	1.19 30.226	0.470 11.938	4.80 0.840	0.770 19.558	3.700 16.458	0.240 6.10	0.038 0.97	6.25	SST	CG N
0.546	13.868	11706	1.19 30.226	0.434 11.024	20.00 3.500	0.580 14.732	12.000 53.376	0.450 11.43	0.056 1.42	8.00	SPR	CG Z
0.546	13.868	W-56	1.19 30.226	0.422 10.719	28.00 4.900	0.502 12.751	14.800 65.830	0.501 12.73	0.063 1.59	8.00	SST	CG N
0.546	13.868	10465	1.22 30.988	0.476 12.090	2.00 0.350	0.860 21.844	1.700 7.562	0.360 9.14	0.035 0.89	10.30	SPR	CG Z
0.546	13.868	I-94	1.25 31.750	0.490 12.446	0.52 0.091	0.870 22.098	0.450 2.002	0.390 9.91	0.028 0.71	12.80	SST	C N
0.546	13.868	YY-49	1.25 31.750	0.456 11.582	12.00 2.100	0.550 13.970	6.500 28.912	0.270 6.86	0.045 1.14	6.00	SPR	CG N
0.546	13.868	S-932	1.25 31.750	0.452 11.481	6.90 1.208	0.770 19.558	5.300 23.574	0.480 12.19	0.047 1.19	9.00	SST	C N
0.546	13.868	S-2	1.25 31.750	0.438 11.125	15.00 2.625	0.660 16.764	9.700 43.146	0.430 10.92	0.054 1.37	8.00	SST	CG N
0.546	13.868	00-99	1.25 31.750	0.362 9.195	96.00 16.800	0.150 3.810	14.000 62.272	1.100 27.94	0.092 2.34	12.00	SST	CG N
0.546	13.868	S-3208	1.31 33.274	0.458 11.633	8.00 1.400	0.710 18.034	5.700 25.354	0.340 8.64	0.044 1.12	6.75	SST	C N
0.546	13.868	S-1593	1.34 34.036	0.436 11.074	14.00 2.450	0.730 18.542	10.000 44.480	0.550 13.97	0.055 1.40	9.00	SST	C N
0.546	13.868	1897	1.38 35.052	0.498 12.649	0.52 0.091	1.100 27.940	0.590 2.624	0.230 5.84	0.024 0.61	8.50	MW	C Z
0.546	13.868	FF-92	1.38 35.052	0.472 11.989	2.00 0.350	0.930 23.622	1.900 8.451	0.440 11.18	0.037 0.94	12.00	SPR	CG N
0.546	13.868	XX-48	1.38 35.052	0.472 11.989	3.90 0.683	0.860 21.844	3.400 15.123	0.280 7.11	0.037 0.94	6.50	SST	C N
0.546	13.868	2707	1.38 35.052	0.422 10.719	30.00 5.250	0.520 13.208	16.000 71.168	0.510 12.95	0.062 1.57	8.25	HD	CG Z
0.546	13.868	S-1160	1.38 35.052	0.422 10.719	25.00 4.375	0.594 15.088	14.800 65.830	0.547 13.89	0.063 1.59	8.80	SST	CG N
0.546	13.868	A15-26	1.38 35.052	0.418 10.617	48.00 8.400	0.360 9.144	17.000 75.616	0.420 10.67	0.064 1.63	6.50	SPR	CG GI
0.546	13.868	A-33	1.38 35.052	0.418 10.617	27.00 4.725	0.630 16.002	17.000 75.616	0.640 16.26	0.064 1.63	10.00	SPR	CG Z
0.546	13.868	QQ-45	1.38 35.052	0.402 10.211	48.00 8.400	0.470 11.938	23.000 102.304	0.760 19.30	0.072 1.83	9.50	HD	C Z
0.546	13.868	3627	1.38 35.052	0.376 9.550	96.00 16.800	0.390 9.906	37.000 164.576	0.850 21.59	0.085 2.16	10.00	HD	CG Z
0.546	13.868	S-1074	1.44 36.576	0.466 11.836	2.90 0.508	0.980 24.892	2.800 12.454	0.460 11.68	0.040 1.02	10.50	SST	C N
0.546	13.868	A14-62	1.47 37.338	0.418 10.617	31.00 5.425	0.550 13.970	17.000 75.616	0.580 14.73	0.064 1.63	9.00	SPR	CG GI
0.546	13.868	BB-94	1.50 38.100	0.488 12.395	1.50 0.263	1.200 30.480	1.700 7.562	0.220 5.59	0.029 0.74	6.50	SST	C N
0.546	13.868	DD-55	1.50 38.100	0.486 12.344	0.94 0.165	1.100 27.940	1.100 4.893	0.360 9.14	0.030 0.76	11.00	MW	C N
0.546	13.868	S-1435	1.50 38.100	0.470 11.938	4.40 0.770	0.830 21.082	3.700 16.458	0.250 6.35	0.038 0.97	6.50	SST	CG N
0.546	13.868	B1-62	1.50 38.100	0.466 11.836	6.30 1.103	0.720 18.288	4.600 20.461	0.260 6.60	0.040 1.02	6.50	SPR	CG Z
0.546	13.868	W-50	1.50 38.100	0.464 11.786	3.40 0.595	1.100 27.940	3.700 16.458	0.410 10.41	0.041 1.04	10.00	SST	CG N
0.546	13.868	S-1066	1.50 38.100	0.438 11.125	5.90 1.033	0.580 14.732	3.500 15.568	0.920 23.37	0.054 1.37	17.00	SST	CG N
0.546	13.868	10138	1.50 38.100	0.422 10.719	27.00 4.725	0.580 14.732	16.000 71.168	0.620 15.75	0.062 1.57	9.00	HD	C Z
0.546	13.868	H-52	1.50 38.100	0.386 9.804	51.00 8.925	0.540 13.716	27.000 120.096	0.960 24.38	0.080 2.03	12.00	SST	CG N
0.546	13.868	10210	1.63 41.402	0.402 10.211	40.00 7.000	0.570 14.478	23.000 102.304	0.790 20.07	0.072 1.83	11.00	SPR	CG Z
0.546	13.868	1591	1.63 41.402	0.398 10.109	61.00 10.675	0.410 10.414	25.000 111.200	0.650 16.51	0.074 1.88	8.75	SPR	CG Z
0.546	13.868	MM-53	1.66 42.164	0.426 10.820	23.00 4.025	0.580 14.732	13.000 57.824	0.500 12.70	0.060 1.52	8.25	SST	CG N
0.546	13.868	10587	1.69 42.926	0.456 11.582	4.60 0.805	1.200 30.480	5.500 24.464	0.500 12.70	0.045 1.14	11.00	SST	CG N
0.546	13.868	12238	1.69 42.926	0.446 11.328	9.20 1.610	0.900 22.860	8.300 36.918	0.500 12.70	0.050 1.27	10.00	SPR	CG Z
0.546	13.868	S-972	1.69 42.926	0.388 9.855	43.00 7.525	0.650 16.510	28.000 124.544	1.030 26.16	0.079 2.01	13.00	SST	CG N
0.546	13.868	G-46	1.75 44.450	0.464 11.786	1.60 0.280	0.930 23.622	1.500 6.672	0.820 20.83	0.041 1.04	19.00	SST	C N
0.546	13.868	S-78	1.75 44.450	0.412 10.465	25.00 4.375	0.740 18.796	18.000 80.064	0.820 20.83	0.067 1.70	11.30	SST	C N
0.546	13.868	12280	1.78 45.212	0.494 12.548	0.36 0.063	1.400 35.560	0.490 2.180	0.420 10.67	0.026 0.66	15.00	MW	C Z
0.546	13.868	11474	1.78 45.212	0.446 11.328	9.20 1.610	0.900 22.860	8.300 36.918	0.550 13.97	0.050 1.27	10.00	SPR	C Z
0.546	13.868	N-118	1.81 45.974	0.376 9.550	81.00 14.175	0.460 11.684	37.000 164.576	0.980 24.89	0.085 2.16	11.50	SPR	CG Z
0.546	13.868	12217	1.84 46.736	0.472 11.989	2.60 0.455	1.400 35.560	3.600 16.013	0.410 10.41	0.037 0.94	10.00	SPR	C Z
0.546	13.868	3817	1.88 47.752	0.362 9.195	110.00 19.250	0.410 10.414	45.000 200.160	1.100 27.94	0.092 2.34	12.00	HD	CG Z
0.546	13.868	S-325	1.94 49.276	0.452 11.481	3.90 0.683	1.200 30.480	4.700 20.906	0.710 18.03	0.047 1.19	15.00	SST	CG N
0.546	13.868	Q-44	2.00 50.800	0.466 11.836	1.70 0.298	1.200 30.480	2.100 9.341	0.760 19.30	0.040 1.02	19.00	SPR	CG N
0.546	13.868	11650	2.00 50.800	0.352 8.941	108.00 18.900	0.480 12.192	52.000 231.296	1.460 37.08	0.097 2.46	15.00	SPR	CG Z
0.546	13.868	12309	2.09 53.086	0.354 8.992	103.00 18.025	0.490 12.446	50.000 222.400	1.440 36.58	0.096 2.44	15.00	SPR	CG Z
0.546	13.868	S-200	2.13 54.102	0.402 10.211	40.00 7.000	0.530 13.462	21.000 93.408	0.790 20.07	0.072 1.83	10.00	SST	C N
0.546	13.868	J-35	2.22 56.388	0.364 9.246	73.00 12.7							




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h							
0.562	14.275	K-19	0.50	12.700	0.478	12.141	16.00	2.800	0.290	7.366	4.600	20.461	0.210	5.33	0.042	1.07	4.00	SPR C	GI
0.562	14.275	DD-89	0.50	12.700	0.438	11.125	99.00	17.325	0.146	3.708	14.500	64.496	0.220	5.59	0.063	1.59	3.50	SST CG	N
0.562	14.275	A15-43	0.53	13.462	0.458	11.633	23.00	4.025	0.270	6.858	6.300	28.022	0.260	6.60	0.052	1.32	5.00	SST CG	N
0.562	14.275	S-1529	0.53	13.462	0.446	11.328	40.00	7.000	0.260	6.604	10.000	44.480	0.280	7.11	0.058	1.47	4.75	SST CG	N
0.562	14.275	U-61	0.53	13.462	0.442	11.227	75.00	13.125	0.170	4.318	13.000	57.824	0.230	5.84	0.060	1.52	3.75	SST CG	N
0.562	14.275	S-436	0.53	13.462	0.434	11.024	113.00	19.775	0.140	3.556	16.000	71.168	0.220	5.59	0.064	1.63	3.50	SST CG	N
0.562	14.275	B-32	0.59	14.986	0.448	11.379	59.00	10.325	0.200	5.080	12.000	53.376	0.230	5.84	0.057	1.45	4.00	SPR CG	N
0.562	14.275	Q-48	0.63	15.875	0.512	13.005	1.60	0.280	0.500	12.700	0.790	3.514	0.130	3.30	0.025	0.64	4.00	SST C	N
0.562	14.275	S-1350	0.63	16.002	0.530	13.462	0.17	0.030	0.530	13.462	0.090	0.400	0.100	2.54	0.016	0.41	5.00	SST C	N
0.562	14.275	B15-33	0.63	16.002	0.502	12.751	2.70	0.473	0.460	11.684	1.300	5.782	0.170	4.32	0.030	0.76	4.50	SST C	N
0.562	14.275	12685	0.63	16.002	0.500	12.700	3.90	0.683	0.470	11.938	1.800	8.006	0.160	4.06	0.031	0.79	4.00	SST C	N
0.562	14.275	3990	0.63	16.002	0.446	11.328	39.00	6.825	0.320	8.128	12.000	53.376	0.300	7.62	0.058	1.47	5.25	SPR CG	Z
0.562	14.275	12750	0.63	16.002	0.438	11.125	74.00	12.950	0.195	4.953	14.500	64.496	0.303	7.70	0.063	1.59	3.90	SST C	N
0.562	14.275	S-219	0.63	16.002	0.438	11.125	74.00	12.950	0.195	4.953	14.500	64.496	0.241	6.12	0.063	1.59	3.90	SST CG	N
0.562	14.275	S-33	0.66	16.764	0.468	11.887	18.00	3.150	0.370	9.398	6.700	29.802	0.210	5.33	0.047	1.19	4.50	SST CG	N
0.562	14.275	U-32	0.66	16.764	0.460	11.684	22.00	3.850	0.370	9.398	8.000	35.584	0.260	6.60	0.051	1.30	5.00	SST CG	N
0.562	14.275	B-6	0.66	16.764	0.418	10.617	119.00	20.825	0.190	4.826	22.000	97.856	0.340	8.64	0.072	1.83	4.75	SPR CG	N
0.562	14.275	S-921	0.66	16.764	0.376	9.550	308.00	53.900	0.140	3.556	42.000	186.816	0.470	11.94	0.093	2.36	5.00	SST CG	N
0.562	14.275	S-1548	0.69	17.526	0.434	11.024	62.00	10.850	0.250	6.350	16.000	71.168	0.300	7.62	0.064	1.63	4.75	SST CG	N
0.562	14.275	3197	0.72	18.288	0.498	12.649	2.20	0.385	0.510	12.954	1.100	4.893	0.210	5.33	0.032	0.81	6.50	SPR CG	Z
0.562	14.275	4189	0.72	18.288	0.438	11.125	49.00	8.575	0.310	7.874	15.000	66.720	0.340	8.64	0.062	1.57	5.50	HD CG	Z
0.562	14.275	BB-68	0.75	19.050	0.520	13.208	0.51	0.089	0.620	15.748	0.320	1.423	0.130	3.30	0.021	0.53	5.00	SST C	N
0.562	14.275	S-1138	0.75	19.050	0.506	12.852	1.80	0.315	0.590	14.986	1.100	4.893	0.160	4.06	0.028	0.71	4.75	SST C	N
0.562	14.275	LL-84	0.75	19.050	0.504	12.802	0.99	0.173	0.470	11.938	0.460	2.046	0.280	7.11	0.029	0.74	8.75	MW C	Z
0.562	14.275	S-3121	0.75	19.050	0.502	12.751	1.70	0.298	0.540	13.716	0.910	4.048	0.210	5.33	0.030	0.76	6.00	SST C	N
0.562	14.275	S-32	0.75	19.050	0.478	12.141	10.00	1.750	0.460	11.684	4.800	21.350	0.200	5.08	0.042	1.07	4.67	SST CG	N
0.562	14.275	XX-40	0.75	19.050	0.470	11.938	9.10	1.593	0.450	11.430	4.100	18.237	0.300	7.62	0.046	1.17	6.50	SST CG	N
0.562	14.275	S-22	0.75	19.050	0.418	10.617	58.00	10.150	0.250	6.350	14.000	62.272	0.500	12.70	0.072	1.83	7.00	SST CG	N
0.562	14.275	3975	0.75	19.050	0.402	10.211	175.00	30.625	0.170	4.318	30.000	133.440	0.400	10.16	0.080	2.03	5.00	SPR CG	Z
0.562	14.275	B11-58	0.81	20.574	0.516	13.106	0.64	0.112	0.650	16.510	0.420	1.868	0.160	4.06	0.023	0.58	6.00	MW C	Z
0.562	14.275	Z-30	0.81	20.574	0.514	13.056	0.56	0.098	0.630	16.002	0.350	1.557	0.190	4.83	0.024	0.61	6.75	SST C	N
0.562	14.275	10649	0.81	20.574	0.462	11.735	17.00	2.975	0.480	12.192	8.000	35.584	0.300	7.62	0.050	1.27	6.00	SPR CG	Z
0.562	14.275	S-87	0.81	20.574	0.460	11.684	21.00	3.675	0.380	9.652	8.000	35.584	0.310	7.87	0.051	1.30	5.00	SST C	N
0.562	14.275	10128	0.88	22.352	0.454	11.532	13.00	2.275	0.390	9.906	5.200	23.130	0.490	12.45	0.054	1.37	9.00	SPR CG	N
0.562	14.275	H-49	0.88	22.352	0.438	11.125	42.00	7.350	0.360	9.144	15.000	66.720	0.370	9.40	0.062	1.57	6.00	SPR CG	GI
0.562	14.275	J-37	0.88	22.352	0.428	10.871	60.00	10.500	0.320	8.128	19.000	84.512	0.470	11.94	0.067	1.70	6.00	SPR C	Z
0.562	14.275	TT-66	0.88	22.352	0.352	8.941	398.00	69.650	0.150	3.810	59.000	262.432	0.630	16.00	0.105	2.67	6.00	SST CG	N
0.562	14.275	2535	0.91	23.114	0.428	10.871	68.00	11.900	0.390	9.906	26.000	115.648	0.370	9.40	0.067	1.70	5.50	MW CG	GI
0.562	14.275	10352	0.94	23.876	0.494	12.548	2.60	0.455	0.670	17.018	1.700	7.562	0.270	6.86	0.034	0.86	7.00	SPR C	Z
0.562	14.275	10820	0.94	23.876	0.482	12.243	3.30	0.578	0.580	14.732	1.900	8.451	0.360	9.14	0.040	1.02	9.00	SST CG	N
0.562	14.275	3799	0.94	23.876	0.478	12.141	4.00	0.700	0.520	13.208	2.100	9.341	0.420	10.67	0.042	1.07	10.00	SPR CG	Z
0.562	14.275	3315	0.94	23.876	0.448	11.379	17.00	2.975	0.430	10.922	7.200	32.026	0.510	12.95	0.057	1.45	9.00	SPR CG	Z
0.562	14.275	JJ-75	0.94	23.876	0.442	11.227	37.00	6.475	0.370	9.398	14.000	62.272	0.360	9.14	0.060	1.52	6.00	SPR CG	N
0.562	14.275	10217	0.94	23.876	0.428	10.871	60.00	10.500	0.320	8.128	19.000	84.512	0.400	10.16	0.067	1.70	6.00	SPR CG	Z
0.562	14.275	3222	0.97	24.638	0.510	12.954	1.20	0.210	0.800	20.320	0.970	4.315	0.170	4.32	0.026	0.66	5.50	MW C	Z
0.562	14.275	12660	0.98	24.892	0.510	12.954	1.10	0.193	0.810	20.574	0.920	4.092	0.180	4.57	0.026	0.66	5.75	MW C	GI
0.562	14.275	L-19	1.00	25.400	0.502	12.751	1.90	0.333	0.790	20.066	1.500	6.672	0.210	5.33	0.030	0.76	6.00	MW C	Z
0.562	14.275	10343	1.00	25.400	0.494	12.548	2.60	0.455	0.730	18.542	1.900	8.451	0.270	6.86	0.034	0.86	7.00	SPR CG	Z
0.562	14.275	S-1141	1.00	25.400	0.494	12.548	3.00	0.525	0.770	19.558	2.300	10.230	0.230	5.84	0.034	0.86	5.75	SST C	N
0.562	14.275	S-1028	1.00	25.400	0.492	12.497	3.20	0.560	0.790	20.066	2.500	11.120	0.210	5.33	0.035	0.89	6.00	SST CG	N
0.562	14.275	S-1305	1.00	25.400	0.488	12.395	5.40	0.945	0.610	15.494	3.300	14.678	0.190	4.83	0.037	0.94	5.00	SST CG	N
0.562	14.275	Y-27	1.00	25.400	0.482	12.243	7.40	1.295	0.600	15.240	4.400	19.571	0.220	5.59	0.040	1.02	5.50	SPR CG	Z
0.562	14.275	S-1027	1.00	25.400	0.468	11.887	11.00	1.925	0.630	16.002	6.700	29.802	0.290	7.37	0.047	1.19	6.25	SST CG	N
0.562	14.275	3881	1.00	25.400	0.466	11.836	14.00	2.450	0.540	13.716	7.600	33.805	0.290	7.37	0.048	1.22	6.00	SPR CG	GI
0.562	14.275	S-358																	




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh
0.562	14.275	S-1303	1.25 31.750	0.474 12.040	7.90 1.383	0.700 17.780	5.500 24.464	0.280 7.11	0.044 1.12	6.25	SST	CG N
0.562	14.275	3822	1.25 31.750	0.466 11.836	10.00 1.750	0.750 19.050	7.600 33.805	0.360 9.14	0.048 1.22	7.50	SPR	CG Z
0.562	14.275	10103	1.25 31.750	0.460 11.684	12.00 2.100	0.700 17.780	8.500 37.808	0.410 10.41	0.051 1.30	8.00	SPR	CG Z
0.562	14.275	3019	1.31 33.274	0.402 10.211	70.00 12.250	0.430 10.922	30.000 133.440	0.760 19.30	0.080 2.03	9.50	SPR	CG Z
0.562	14.275	12403	1.34 34.036	0.512 13.005	0.56 0.098	1.100 27.940	0.620 2.758	0.240 6.10	0.025 0.64	8.50	MW	C N
0.562	14.275	12026	1.34 34.036	0.398 10.109	78.00 13.650	0.410 10.414	33.000 146.784	0.780 19.81	0.082 2.08	9.50	SPR	CG N
0.562	14.275	Y-19	1.34 34.036	0.352 8.941	262.00 45.850	0.240 6.096	64.000 284.672	0.950 24.13	0.105 2.67	9.00	SPR	CG Z
0.562	14.275	1943	1.38 35.052	0.512 13.005	0.56 0.098	1.100 27.940	0.630 2.802	0.240 6.10	0.025 0.64	8.50	MW	C Z
0.562	14.275	10246	1.38 35.052	0.510 12.954	0.34 0.060	0.970 24.638	0.320 1.423	0.410 10.41	0.026 0.66	14.80	MW	C Z
0.562	14.275	S-861	1.38 35.052	0.460 11.684	7.90 1.383	0.870 22.098	6.900 30.691	0.510 12.95	0.051 1.30	10.00	SST	CG N
0.562	14.275	3886	1.38 35.052	0.452 11.481	13.00 2.275	0.770 19.558	9.700 43.146	0.610 15.49	0.055 1.40	10.00	SPR	C Z
0.562	14.275	S-421	1.38 35.052	0.436 11.074	25.00 4.375	0.578 14.681	14.500 64.496	0.508 12.90	0.063 1.59	8.10	SST	CG N
0.562	14.275	29	1.38 35.052	0.418 10.617	45.00 7.875	0.490 12.446	22.000 97.856	0.740 18.80	0.072 1.83	9.25	HD	C Z
0.562	14.275	Q-29	1.38 35.052	0.378 9.601	108.00 18.900	0.370 9.398	40.000 177.920	0.920 23.37	0.092 2.34	10.00	SST	CG N
0.562	14.275	S-1691	1.41 35.814	0.526 13.360	0.03 0.005	0.870 22.098	0.030 0.133	0.540 13.72	0.018 0.46	28.80	SST	C N
0.562	14.275	Y-22	1.41 35.814	0.512 13.005	0.63 0.110	1.200 30.480	0.760 3.380	0.200 5.08	0.025 0.64	7.00	MW	C N
0.562	14.275	S-819	1.41 35.814	0.418 10.617	38.00 6.650	0.560 14.224	21.000 93.408	0.700 17.78	0.072 1.83	9.75	SST	CG N
0.562	14.275	3204	1.44 36.576	0.504 12.802	0.53 0.093	0.980 24.892	0.520 2.313	0.460 11.68	0.029 0.74	14.80	MW	C Z
0.562	14.275	A9-29	1.44 36.576	0.400 10.160	68.00 11.900	0.444 11.278	30.000 133.440	0.780 19.81	0.082 2.08	9.50	SST	CG N
0.562	14.275	G-44	1.50 38.100	0.506 12.852	0.45 0.079	1.100 27.940	0.470 2.091	0.450 11.43	0.028 0.71	15.00	MW	C N
0.562	14.275	11365	1.50 38.100	0.480 12.192	2.20 0.385	0.900 22.860	1.900 8.451	0.600 15.24	0.041 1.04	13.80	SST	C N
0.562	14.275	2800	1.50 38.100	0.456 11.582	7.20 1.260	0.760 19.304	5.400 24.019	0.740 18.80	0.053 1.35	14.00	MW	CG Z
0.562	14.275	S-1129	1.50 38.100	0.442 11.227	15.00 2.625	0.860 21.844	13.000 57.824	0.630 16.00	0.060 1.52	10.50	SST	CG N
0.562	14.275	3851	1.50 38.100	0.438 11.125	23.00 4.025	0.670 17.018	15.000 66.720	0.590 14.99	0.062 1.57	9.50	HD	CG Z
0.562	14.275	2925	1.50 38.100	0.402 10.211	58.00 10.150	0.520 13.208	30.000 133.440	0.880 22.35	0.080 2.03	11.00	SPR	CG Z
0.562	14.275	B14-62	1.56 39.624	0.502 12.751	1.90 0.333	1.400 35.560	2.600 11.565	0.210 5.33	0.030 0.76	6.00	MW	C N
0.562	14.275	3731	1.63 41.402	0.512 13.005	0.48 0.084	1.400 35.560	0.660 2.936	0.260 6.60	0.025 0.64	9.50	MW	C Z
0.562	14.275	2941	1.63 41.402	0.510 12.954	0.33 0.058	1.200 30.480	0.400 1.779	0.410 10.41	0.026 0.66	15.00	MW	C Z
0.562	14.275	TT-53	1.63 41.402	0.460 11.684	5.30 0.928	0.910 23.114	4.800 21.350	0.710 18.03	0.051 1.30	14.00	SST	CG N
0.562	14.275	3983	1.63 41.402	0.438 11.125	17.00 2.975	0.880 22.352	15.000 66.720	0.740 18.80	0.062 1.57	12.00	SPR	CG Z
0.562	14.275	2722	1.66 42.164	0.492 12.497	1.90 0.333	1.300 33.020	2.500 11.120	0.340 8.64	0.035 0.89	9.75	MW	CG Z
0.562	14.275	S-115	1.66 42.164	0.428 10.871	23.00 4.025	0.770 19.558	18.000 80.064	0.740 18.80	0.067 1.70	11.00	SST	CG N
0.562	14.275	12593	1.69 42.926	0.422 10.719	31.00 5.425	0.670 17.018	21.000 93.408	0.880 22.35	0.070 1.78	11.50	SPR	C N
0.562	14.275	12333	1.72 43.688	0.458 11.633	13.00 2.275	0.680 17.272	9.000 40.032	0.420 10.67	0.052 1.32	8.00	SPR	CG Z
0.562	14.275	2873	1.75 44.450	0.502 12.751	0.61 0.107	1.300 33.020	0.770 3.425	0.470 11.94	0.030 0.76	14.80	MW	C Z
0.562	14.275	A13-44	1.75 44.450	0.478 12.141	3.40 0.595	1.300 33.020	4.500 20.016	0.430 10.92	0.042 1.07	10.30	SST	CG N
0.562	14.275	B18-168	1.75 44.450	0.404 10.262	52.00 9.100	0.530 13.462	27.000 120.096	0.830 21.08	0.079 2.01	10.50	SST	CG N
0.562	14.275	2639	1.75 44.450	0.380 9.652	94.00 16.450	0.630 16.002	59.000 262.432	1.090 27.69	0.091 2.31	12.00	MW	CG Z
0.562	14.275	S-170	1.78 45.212	0.428 10.871	23.00 4.025	0.770 19.558	18.000 80.064	0.800 20.32	0.067 1.70	11.00	SST	C N
0.562	14.275	3716	1.81 45.974	0.508 12.903	0.39 0.688	1.400 35.560	0.540 2.402	0.430 10.92	0.027 0.69	15.00	MW	C Z
0.562	14.275	12659	1.81 45.974	0.480 12.192	1.70 0.298	1.000 25.400	1.700 7.562	0.780 19.81	0.041 1.04	19.00	SPR	CG Z
0.562	14.275	3218	1.81 45.974	0.478 12.141	3.90 0.683	1.300 33.020	5.100 22.685	0.470 11.94	0.042 1.07	10.00	SPR	C Z
0.562	14.275	VV-60	1.88 47.752	0.502 12.751	1.10 0.193	1.600 40.640	1.700 7.562	0.300 7.62	0.030 0.76	9.00	MW	C Z
0.562	14.275	S-1172	1.88 47.752	0.462 11.735	7.30 1.278	1.000 25.400	7.600 33.805	0.500 12.70	0.050 1.27	10.00	SST	CG N
0.562	14.275	10927	1.88 47.752	0.432 10.973	21.00 3.675	0.810 20.574	17.000 75.616	0.830 21.08	0.065 1.65	11.80	SPR	C Z
0.562	14.275	B2-55	1.88 47.752	0.422 10.719	48.00 8.400	0.420 10.668	21.000 93.408	0.560 14.22	0.070 1.78	8.00	SPR	CG N
0.562	14.275	12607	2.00 50.800	0.490 12.446	2.10 0.368	1.600 40.640	3.300 14.678	0.400 10.16	0.036 0.91	10.00	MW	C Z
0.562	14.275	11748	2.00 50.800	0.460 11.684	6.10 1.068	1.300 33.020	7.800 34.694	0.710 18.03	0.051 1.30	14.00	SPR	CG Z
0.562	14.275	11440	2.00 50.800	0.438 11.125	15.00 2.625	0.963 24.460	14.500 64.496	0.740 18.80	0.063 1.59	12.20	SST	CG N
0.562	14.275	10066	2.00 50.800	0.412 10.465	39.00 6.825	0.640 16.256	25.000 111.200	0.900 22.86	0.075 1.91	12.00	SPR	CG Z
0.562	14.275	B11-46	2.00 50.800	0.412 10.465	33.00 5.775	0.710 18.034	23.000 102.304	0.940 23.88	0.075 1.91	12.50	SST	CG N
0.562	14.275	2898	2.06 52.324	0.502 12.751	0.61 0.107	1.600 40.640	0.960 4.270	0.470 11.94	0.030 0.76	14.80	MW	C Z
0.562	14.275	11874	2.09 53.086	0.452 11.481	7.20 1.260	1.200 30.480	8.800 39.142	0.880 22.35	0.055 1.40	16.00	SPR	CG N
0.562	14.275	B8-48	2.16 54.864	0.362 9.195	112.00 19.600	0.490 12.446	55.000 244.640	1.500 38.10	0.100 2.54	15.00	SPR	CG N
0.562	14.275	11568	2.22 56.388	0.458 11.633	7.20 1.260	1.300 33.020	9.000 40.032	0.730 18.54	0.052 1.32	13.00	SPR	CG N
0.562	14.275	3556	2.25 57.150	0.426 10.820	20.00 3.500	1.200 30.480	25.000 111.200	1.000 25.40	0.068 1.73	14.80	MW	CG Z
0.562	14.275	10337	2.31 58.674	0.428 10.871	22.00 3.850	0.880 22.352	19.000 84.512	0.870 22.10	0.067 1.70	13.00	SPR	CG Z
0.562	14.275	4368	2.31 58.674	0.394 10.008	56.00 9.800	0.630 16.002	35.000 155.680	1.160 29.46	0.084 2.13	13.80	SPR	CG Z
0.562	14.275	S-1219	2.38 60.452	0.482 12.243	1.30 0.228	1.600 40.640	2.100 9.341	0.800 20.32	0.040 1.02	19.00	SST	C N
0.562	14.275	3969	2.38 60.452	0.472 11.989	5.30 0.928	1.200 30.480	6.300 28.022	0.500 12.70	0.045 1.14	10.00	SPR	C Z
0.562	14.275	887	2.38 60.452	0.402 10.211	38.00 6.650	0.810 20.574	30.000 133.440	1.360 34.54	0.080 2.03	16.00	HD	C Z
0.562	14.275	10563	2.44 61.976	0.388 9.855	50.00 8.750	0.780 19.812	39.000 173.472	1.520 38.61	0.087 2.21	17.50	SPR	CG Z
0.562	14.275	4372	2.44 61.97									




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h						
0.562	14.275	10234	5.25	133.350	0.322	8.179	113.00	19.775	0.790	20.066	90.000	400.320	3.900	99.06	0.120	3.05	32.50	SPR CG Z
0.562	14.275	10786	5.50	139.700	0.422	10.719	7.80	1.365	2.600	66.040	21.000	93.408	2.730	69.34	0.070	1.78	39.00	SPR CG N
0.562	14.275	10385	10.00	254.000	0.438	11.125	3.90	0.683	3.900	99.060	15.000	66.720	2.910	73.91	0.062	1.57	46.00	SPR C Z
0.562	14.275	10296	10.00	254.000	0.432	10.973	4.80	0.840	3.700	93.980	17.000	75.616	2.990	75.95	0.065	1.65	46.00	SPR CG Z
0.562	14.275	4166	12.80	325.120	0.460	11.684	1.30	0.228	6.300	160.020	8.500	37.808	2.910	73.91	0.051	1.30	56.00	SPR C Z
0.562	14.275	4392	15.00	381.000	0.460	11.684	1.30	0.228	6.300	160.020	8.500	37.808	2.910	73.91	0.051	1.30	56.00	SPR C Z
0.578	14.681	L-20	0.47	11.938	0.494	12.548	25.00	4.375	0.190	4.826	4.700	20.906	0.170	4.32	0.042	1.07	3.00	SST C N
0.578	14.681	WW-69	0.50	12.700	0.516	13.106	2.00	0.350	0.280	7.112	0.570	2.535	0.220	5.59	0.031	0.79	6.00	MW C Z
0.578	14.681	S-1103	0.50	12.700	0.502	12.751	9.50	1.663	0.320	8.128	3.000	13.344	0.180	4.57	0.038	0.97	3.75	SST C N
0.578	14.681	BB-80	0.59	14.986	0.418	10.617	138.00	24.150	0.190	4.826	27.000	120.096	0.400	10.16	0.080	2.03	5.00	SST CG N
0.578	14.681	Z-99	0.63	16.002	0.538	13.665	0.15	0.026	0.410	10.414	0.060	0.267	0.220	5.59	0.020	0.51	11.00	MW CG Z
0.578	14.681	10394	0.66	16.764	0.410	10.414	237.00	41.475	0.140	3.556	34.000	151.232	0.380	9.65	0.084	2.13	4.50	SPR CG Z
0.578	14.681	I-41	0.69	17.526	0.388	9.855	320.00	56.000	0.150	3.810	47.000	209.056	0.500	12.70	0.095	2.41	5.25	SPR CG N
0.578	14.681	G-32	0.75	19.050	0.524	13.310	0.65	0.114	0.480	12.192	0.310	1.379	0.270	6.86	0.027	0.69	9.00	MW C Z
0.578	14.681	2718	0.75	19.050	0.518	13.157	2.40	0.420	0.570	14.478	1.300	5.782	0.180	4.57	0.030	0.76	5.00	MW C Z
0.578	14.681	B14-2	0.75	19.050	0.484	12.294	16.00	2.800	0.450	11.430	7.000	31.136	0.240	6.10	0.047	1.19	5.00	SPR CG N
0.578	14.681	3659	0.75	19.050	0.474	12.040	29.00	5.075	0.300	7.620	8.800	39.142	0.230	5.84	0.052	1.32	4.50	SPR CG GI
0.578	14.681	A-45	0.81	20.574	0.418	10.617	104.00	18.200	0.270	6.858	28.000	124.544	0.480	12.19	0.080	2.03	6.00	SST CG N
0.578	14.681	12200	0.88	22.352	0.514	13.056	3.10	0.543	0.720	18.288	2.200	9.786	0.160	4.06	0.032	0.81	5.00	SPR CG Z
0.578	14.681	12329	0.88	22.352	0.430	10.922	84.00	14.700	0.280	7.112	24.000	106.752	0.440	11.18	0.074	1.88	6.00	SPR CG Z
0.578	14.681	3513	0.91	23.114	0.460	11.684	42.00	7.350	0.430	10.922	18.000	80.064	0.350	8.89	0.059	1.50	5.00	MW C Z
0.578	14.681	10929	0.97	24.638	0.526	13.360	1.20	0.210	0.810	20.574	0.940	4.181	0.160	4.06	0.026	0.66	5.00	SST C N
0.578	14.681	2960	1.00	25.400	0.520	13.208	1.00	0.175	0.740	18.796	0.760	3.380	0.260	6.60	0.029	0.74	8.00	MW C Z
0.578	14.681	S-1064	1.00	25.400	0.520	13.208	1.80	0.315	0.830	21.082	1.500	6.672	0.170	4.32	0.029	0.74	5.00	SST C N
0.578	14.681	Y-38	1.00	25.400	0.510	12.954	2.60	0.455	0.800	20.320	2.100	9.341	0.200	5.08	0.034	0.86	6.00	SST CG N
0.578	14.681	12662	1.00	25.400	0.508	12.903	4.50	0.788	0.790	20.066	3.500	15.568	0.210	5.33	0.035	0.89	5.00	MW C GI
0.578	14.681	S-1330	1.00	25.400	0.508	12.903	3.30	0.578	0.770	19.558	2.600	11.565	0.230	5.84	0.035	0.89	5.50	SST C N
0.578	14.681	RR-63	1.00	25.400	0.506	12.852	5.10	0.893	0.630	16.002	3.200	14.234	0.220	5.59	0.036	0.91	5.00	SPR C Z
0.578	14.681	10826	1.00	25.400	0.504	12.802	4.50	0.788	0.750	19.050	3.400	15.123	0.250	6.35	0.037	0.94	5.75	SPR C Z
0.578	14.681	12740	1.00	25.400	0.502	12.751	5.40	0.945	0.680	17.272	3.700	16.458	0.250	6.35	0.038	0.97	5.50	SPR C Z
0.578	14.681	B3-45	1.00	25.400	0.448	11.379	35.00	6.125	0.450	11.430	15.000	66.720	0.550	13.97	0.065	1.65	7.50	MW C N
0.578	14.681	Q-34	1.03	26.162	0.458	11.633	24.00	4.200	0.530	13.462	13.000	57.824	0.420	10.67	0.060	1.52	7.00	SST CG N
0.578	14.681	S-1656	1.03	26.162	0.456	11.582	26.00	4.550	0.520	13.208	13.000	57.824	0.430	10.92	0.061	1.55	7.00	SST CG N
0.578	14.681	11373	1.13	28.702	0.496	12.598	3.30	0.578	0.760	19.304	2.500	11.120	0.370	9.40	0.041	1.04	9.00	SST CG N
0.578	14.681	S-818	1.13	28.702	0.428	10.871	63.00	11.025	0.360	9.144	23.000	102.304	0.530	13.46	0.075	1.91	7.00	SST CG N
0.578	14.681	10881	1.19	30.226	0.398	10.109	130.00	22.750	0.310	7.874	40.000	177.920	0.740	18.80	0.090	2.29	8.25	SPR CG N
0.578	14.681	I-43	1.25	31.750	0.512	13.005	2.30	0.403	1.000	25.400	2.300	10.230	0.230	5.84	0.033	0.84	6.00	SST C N
0.578	14.681	S-1041	1.25	31.750	0.482	12.243	4.20	0.735	0.673	17.094	2.800	12.454	0.577	14.66	0.048	1.21	12.00	SST CG N
0.578	14.681	B9-67	1.25	31.750	0.444	11.278	24.00	4.200	0.510	12.954	12.000	53.376	0.740	18.80	0.067	1.70	10.00	SST C N
0.578	14.681	00-55	1.28	32.512	0.478	12.141	6.80	1.190	0.780	19.812	5.300	23.574	0.500	12.70	0.050	1.27	10.00	SST CG N
0.578	14.681	S-1498	1.31	33.274	0.478	12.141	7.60	1.330	0.860	21.844	6.500	28.912	0.450	11.43	0.050	1.27	9.00	SST CG N
0.578	14.681	3112	1.31	33.274	0.468	11.887	18.00	3.150	0.560	14.224	10.000	44.480	0.390	9.91	0.055	1.40	7.00	SPR CG Z
0.578	14.681	S-139	1.34	34.036	0.526	13.360	0.97	0.170	1.200	30.480	1.100	4.893	0.170	4.32	0.026	0.66	5.50	SST C N
0.578	14.681	GG-89	1.38	35.052	0.450	11.430	29.00	5.075	0.530	13.462	15.000	66.720	0.480	12.19	0.064	1.63	7.50	SST CG N
0.578	14.681	WW-30	1.38	35.052	0.328	8.331	539.00	94.325	0.180	4.572	98.000	435.904	1.130	28.70	0.125	3.18	9.00	SPR CG Z
0.578	14.681	A-97	1.41	35.814	0.338	8.585	443.00	77.525	0.200	5.080	88.000	391.424	1.080	27.43	0.120	3.05	9.00	HD CG Z
0.578	14.681	10672	1.44	36.576	0.438	11.125	34.00	5.950	0.590	14.986	20.000	88.960	0.680	17.27	0.070	1.78	9.75	SPR CG Z
0.578	14.681	B12-59	1.44	36.576	0.396	10.058	131.00	22.925	0.310	7.874	41.000	182.368	0.860	21.84	0.091	2.31	8.50	SPR C Z
0.578	14.681	4116	1.50	38.100	0.470	11.938	12.00	2.100	0.810	20.574	9.800	43.590	0.540	13.72	0.054	1.37	9.00	SPR C Z
0.578	14.681	S-887	1.53	38.862	0.398	10.109	94.00	16.450	0.390	9.906	37.000	164.576	0.860	21.84	0.090	2.29	9.50	SST CG N
0.578	14.681	S-199	1.56	39.624	0.488	12.395	6.20	1.085	0.930	23.622	5.700	25.354	0.380	9.65	0.045	1.14	7.50	SST C N
0.578	14.681	4321	1.63	41.402	0.470	11.938	11.00	1.925	0.920	23.368	9.800	43.590	0.540	13.72	0.054	1.37	10.00	SPR CG Z
0.578	14.681	12209	1.63	41.402	0.434	11.024	37.00	6.475	0.580	14.732	22.000	97.856	0.720	18.29	0.072	1.83	10.00	SPR CG Z
0.578	14.681	NN-56	1.69	42.926	0.398	10.109	80.00	14.000	0.460	11.684	37.000	164.576	0.990	25.15	0.090	2.29	11.00	SST CG N
0.578	14.681	2797	1.75	44.450	0.338	8.585	443.00	77.525	0.200	5.080	88.000	391.424	1.080	27.43	0.120	3.05		




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
0.578	14.681	S-3041	4.75 120.650	0.454 11.532	4.60 0.805	2.671 67.843	12.300 54.710	2.079 52.81	0.063 1.59	32.00	SST	C N
0.578	14.681	3345	5.00 127.000	0.438 11.125	11.00 1.925	1.800 45.720	20.000 88.960	1.820 46.23	0.070 1.78	26.00	SPR	CG Z
0.578	14.681	12296	5.38 136.652	0.462 11.735	5.40 0.945	2.300 58.420	12.000 53.376	1.420 36.07	0.058 1.47	23.50	SPR	C Z
0.578	14.681	10087	5.38 136.652	0.454 11.532	7.00 1.225	2.100 53.340	15.000 66.720	1.550 39.37	0.062 1.57	24.00	HD	C N
0.578	14.681	12081	5.50 139.700	0.454 11.532	6.20 1.085	2.400 60.960	15.000 66.720	1.670 42.42	0.062 1.57	27.00	SPR	CG Z
0.578	14.681	4187	7.50 190.500	0.458 11.633	4.20 0.735	3.200 81.280	13.000 57.824	2.100 53.34	0.060 1.52	34.00	SPR	C BO
0.578	14.681	S-3043	7.63 193.802	0.454 11.532	4.20 0.735	3.351 85.115	14.100 62.717	2.259 57.38	0.063 1.59	35.00	SST	C N
0.578	14.681	4016	23.50 596.900	0.408 10.363	5.70 0.998	6.200 157.480	35.000 155.680	9.560 242.82	0.085 2.16	111.50	SPR	C Z
0.59	14.986	12524	1.50 38.100	0.386 9.804	255.00 44.625	0.220 5.588	56.000 249.088	0.740 18.80	0.102 2.59	7.25	SPR	CG N
0.593	15.062	3789	0.44 11.176	0.497 12.624	13.00 2.275	0.170 4.318	2.300 10.230	0.260 6.60	0.048 1.22	5.50	SPR	CG Z
0.593	15.062	10334	0.50 12.700	0.459 11.659	199.00 34.825	0.090 2.286	18.000 80.064	0.270 6.86	0.067 1.70	3.00	SPR	C Z
0.593	15.062	A-47	0.53 13.462	0.393 9.982	800.00 140.000	0.070 1.778	53.000 235.744	0.350 8.89	0.100 2.54	3.50	SPR	CG GI
0.593	15.062	NN-92	0.56 14.224	0.523 13.284	2.40 0.420	0.300 7.620	0.720 3.203	0.260 6.60	0.035 0.89	6.50	SST	CG N
0.593	15.062	11341	0.56 14.224	0.503 12.776	14.00 2.450	0.370 9.398	5.200 23.130	0.190 4.83	0.045 1.14	4.25	SST	CG N
0.593	15.062	I-79	0.56 14.224	0.483 12.268	42.00 7.350	0.240 6.096	10.000 44.480	0.220 5.59	0.055 1.40	4.00	SPR	CG GI
0.593	15.062	3540	0.59 14.986	0.503 12.776	14.00 2.450	0.350 8.890	5.000 22.240	0.250 6.35	0.045 1.14	4.50	HD	C Z
0.593	15.062	3586	0.59 14.986	0.491 12.471	20.00 3.500	0.340 8.636	6.900 30.691	0.260 6.60	0.051 1.30	5.00	HD	CG Z
0.593	15.062	10784	0.59 14.986	0.473 12.014	41.00 7.175	0.290 7.366	12.000 53.376	0.300 7.62	0.060 1.52	5.00	SPR	CG N
0.593	15.062	2540	0.59 14.986	0.449 11.405	109.00 19.075	0.190 4.826	21.000 93.408	0.320 8.13	0.072 1.83	4.50	SPR	CG Z
0.593	15.062	3502	0.63 16.002	0.529 13.437	2.40 0.420	0.420 10.668	1.000 4.448	0.210 5.33	0.032 0.81	5.50	HD	C Z
0.593	15.062	10280	0.63 16.002	0.503 12.776	20.00 3.500	0.290 7.366	6.000 26.688	0.170 4.32	0.045 1.14	3.75	SPR	CG Z
0.593	15.062	Y-66	0.63 16.002	0.503 12.776	18.00 3.150	0.310 7.874	5.600 24.909	0.170 4.32	0.045 1.14	3.75	SST	CG N
0.593	15.062	G-29	0.63 16.002	0.485 12.319	14.00 2.450	0.250 6.350	3.400 15.123	0.380 9.65	0.054 1.37	7.00	SST	CG N
0.593	15.062	3843	0.63 16.002	0.483 12.268	42.00 7.350	0.240 6.096	10.000 44.480	0.220 5.59	0.055 1.40	4.00	SPR	CG GI
0.593	15.062	11309	0.63 16.002	0.465 11.811	65.00 11.375	0.240 6.096	16.000 71.168	0.350 8.89	0.064 1.63	4.50	SPR	C N
0.593	15.062	10538	0.66 16.764	0.419 10.643	231.00 40.425	0.160 4.064	37.000 164.576	0.410 10.41	0.087 2.21	4.75	SPR	CG Z
0.593	15.062	S-906	0.69 17.526	0.453 11.506	70.00 12.250	0.260 6.604	18.000 80.064	0.350 8.89	0.070 1.78	5.00	SST	CG N
0.593	15.062	N-130	0.75 19.050	0.517 13.132	5.20 0.910	0.560 14.224	2.900 12.899	0.190 4.83	0.038 0.97	5.00	SST	CG N
0.593	15.062	N-120	0.75 19.050	0.515 13.081	5.70 0.998	0.560 14.224	3.100 13.789	0.200 5.08	0.039 0.99	5.00	SST	CG N
0.593	15.062	S-828	0.75 19.050	0.513 13.030	8.90 1.558	0.440 11.176	4.000 17.792	0.210 5.33	0.040 1.02	4.00	SST	C N
0.593	15.062	S-872	0.75 19.050	0.499 12.675	11.00 1.925	0.500 12.700	5.700 25.354	0.250 6.35	0.047 1.19	5.33	SST	CG N
0.593	15.062	M-134	0.75 19.050	0.453 11.506	143.00 25.025	0.130 3.302	18.000 80.064	0.320 8.13	0.070 1.78	3.50	SST	C N
0.593	15.062	3541	0.75 19.050	0.433 10.998	145.00 25.375	0.280 7.112	40.000 177.920	0.400 10.16	0.080 2.03	5.00	MW	CG Z
0.593	15.062	B-15-19	0.78 19.812	0.509 12.929	11.00 1.925	0.460 11.684	4.900 21.795	0.190 4.83	0.042 1.07	4.50	SPR	CG N
0.593	15.062	S-943	0.78 19.812	0.485 12.319	17.00 2.975	0.450 11.430	7.500 33.360	0.330 8.38	0.054 1.37	6.00	SST	CG N
0.593	15.062	S-928	0.78 19.812	0.465 11.811	53.00 9.275	0.280 7.112	15.000 66.720	0.300 7.62	0.064 1.63	4.67	SST	CG N
0.593	15.062	10252	0.78 19.812	0.423 10.744	229.00 40.075	0.150 3.810	34.000 151.232	0.470 11.94	0.085 2.16	4.50	SPR	C Z
0.593	15.062	S-62	0.78 19.812	0.409 10.389	484.00 84.700	0.080 2.032	39.000 173.472	0.320 8.13	0.092 2.34	3.50	SST	CG N
0.593	15.062	I-46	0.81 20.574	0.531 13.487	2.40 0.420	0.630 16.002	1.500 6.672	0.180 4.57	0.031 0.79	4.75	SST	C N
0.593	15.062	3547	0.84 21.336	0.463 11.760	44.00 7.700	0.380 9.652	17.000 75.616	0.390 9.91	0.065 1.65	6.00	HD	CG GI
0.593	15.062	2940	0.84 21.336	0.459 11.659	57.00 9.975	0.320 8.128	18.000 80.064	0.370 9.40	0.067 1.70	5.50	SPR	CG Z
0.593	15.062	3840	0.84 21.336	0.449 11.405	78.00 13.650	0.270 6.858	21.000 93.408	0.400 10.16	0.072 1.83	5.50	SPR	CG Z
0.593	15.062	12277	0.88 22.352	0.513 13.030	4.40 0.770	0.600 15.240	2.600 11.565	0.280 7.11	0.040 1.02	7.00	SPR	CG Z
0.593	15.062	B-98	0.88 22.352	0.467 11.862	51.00 8.925	0.300 7.620	15.000 66.720	0.320 8.13	0.063 1.60	5.00	SPR	CG Z
0.593	15.062	11196	0.91 23.114	0.463 11.760	48.00 8.400	0.330 8.382	16.000 71.168	0.340 8.64	0.065 1.65	5.25	SST	CG N
0.593	15.062	12689	0.92 23.368	0.451 11.455	73.00 12.775	0.390 9.906	28.000 124.544	0.390 9.91	0.071 1.80	5.50	MW	CG Z
0.593	15.062	S-3096	0.94 23.876	0.473 12.014	31.00 5.425	0.400 10.160	12.000 53.376	0.390 9.91	0.060 1.52	5.50	SST	C N
0.593	15.062	3091	0.94 23.876	0.469 11.913	28.00 4.900	0.500 12.700	14.000 62.272	0.440 11.18	0.062 1.57	7.00	SPR	CG Z
0.593	15.062	1923	0.97 24.638	0.289 7.341	2982.00 521.850	0.050 1.270	156.000 693.888	0.760 19.30	0.152 3.86	5.00	SPR	CG Z
0.593	15.062	A13-58	1.00 25.400	0.531 13.487	1.90 0.333	0.830 21.082	1.600 7.117	0.170 4.32	0.031 0.79	5.50	SST	CG N
0.593	15.062	10366	1.00 25.400	0.519 13.183	4.50 0.788	0.750 19.050	3.300 14.678	0.240 6.10	0.037 0.94	5.50	SPR	C Z
0.593	15.062	BB-65	1.00 25.400	0.443 11.252	93.00 16.275	0.260 6.604	24.000 106.752	0.410 10.41	0.075 1.91	5.50	SPR	CG Z
0.593	15.062	A11-66	1.03 26.162	0.531 13.487	1.90 0.333	0.860 21.844	1.600 7.117	0.170 4.32	0.031 0.79	5.50	SST	CG N
0.593	15.062	S-375	1.03 26.162	0.469 11.913	25.00 4.375	0.550 13.970	13.700 60.938	0.444 11.28	0.063 1.59	7.10	SST	CG N
0.593	15.062	K-46	1.13 28.702	0.469 11.913	25.00 4.375	0.550 13.970	13.700 60.938	0.444 11.28	0.063 1.59	7.10	SST	CG N
0.593	15.062	3536	1.13 28.702	0.467 11.862	30.00 5.250	0.680 17.272	21.000 93.408	0.440 11.18	0.063 1.60	7.00	MW	CG Z
0.593	15.062	3320	1.13 28.702	0.449 11.405	43.00 7.525	0.490 12.446	21.000 93.408	0.600 15.24	0.072 1.83	8.25	HD	CG Z
0.593	15.062	S-1362	1.13 28.702	0.433 10.998	63.00 11.025	0.430 10.922	27.000 120.096	0.640 16.26	0.080 2.03	8.00	SST	CG N
0.593	15.062	4297	1.13 28.702	0.411 10.439	148.00 25.900	0.270 6.858	40.000 177.920	0.750 19.05	0.091 2.31	7.25	SPR	C Z
0.593	15.062	S-1356	1.16 29.464	0.433 10.998	76.00 13.300	0.360 9.144	27.000 120.096	0.560 14.22	0.080 2.03	7.00	SST	CG N
0.593	15.062	10174	1.19 30.226	0.499 12.675	8.60 1.505	0.790 20.066	6.800 30.246	0.380 9.65	0.047 1.19	7.00	SPR	C Z
0.593	15.062	B12-65	1.19 30.226	0.457 11.608	30.00 5.250	0.580 14.732	17.000 75.616	0.610 15.49	0.068 1.73	9.00	SPR	CG Z
0.593	15.062	S-295	1.19 30.226	0.427 10.846								




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.593	15.062	10113	1.56	39.624	0.323	8.204	710.00	124.250	0.160	4.064	116.000	515.968	1.220	30.99	0.135	3.43	9.00	SPR CG Z
0.593	15.062	3060	1.63	41.402	0.513	13.030	2.40	0.420	1.200	30.480	2.900	12.899	0.440	11.18	0.040	1.02	11.00	SPR CG Z
0.593	15.062	S-856	1.63	41.402	0.485	12.319	6.00	1.050	0.900	22.860	5.400	24.019	0.730	18.54	0.054	1.37	13.50	SST CG N
0.593	15.062	3268	1.63	41.402	0.459	11.659	23.00	4.025	0.770	19.558	18.000	80.064	0.700	17.78	0.067	1.70	10.50	SPR CG Z
0.593	15.062	10030	1.63	41.402	0.449	11.405	34.00	5.950	0.620	15.748	21.000	93.408	0.720	18.29	0.072	1.83	10.00	HD CG Z
0.593	15.062	10717	1.63	41.402	0.433	10.998	47.00	8.225	0.610	15.494	29.000	128.992	0.900	22.86	0.080	2.03	11.30	SPR CG GI
0.593	15.062	3057	1.63	41.402	0.383	9.728	215.00	37.625	0.280	7.112	61.000	271.328	0.950	24.13	0.105	2.67	9.00	SPR CG Z
0.593	15.062	JJ-83	1.75	44.450	0.501	12.725	2.40	0.420	0.970	24.638	2.400	10.675	0.780	19.81	0.046	1.17	16.00	SST C N
0.593	15.062	3500	1.75	44.450	0.469	11.913	18.00	3.150	0.810	20.574	14.000	62.272	0.620	15.75	0.062	1.57	10.00	SPR CG Z
0.593	15.062	12186	1.78	45.212	0.493	12.522	6.10	1.068	1.200	30.480	7.100	31.581	0.610	15.49	0.050	1.27	11.30	SPR C Z
0.593	15.062	H-81	1.81	45.974	0.517	13.132	1.60	0.280	1.400	35.560	2.100	9.341	0.460	11.68	0.038	0.97	12.00	SST CG N
0.593	15.062	12078	1.84	46.736	0.459	11.659	27.00	4.725	0.680	17.272	18.000	80.064	0.640	16.26	0.067	1.70	9.50	SPR CG Z
0.593	15.062	3539	1.88	47.752	0.529	13.437	0.85	0.149	1.500	38.100	1.200	5.338	0.420	10.67	0.032	0.81	12.00	MW C Z
0.593	15.062	LL-68	1.94	49.276	0.533	13.538	0.96	0.168	1.700	43.180	1.600	7.117	0.270	6.86	0.030	0.76	8.00	SST C N
0.593	15.062	10506	2.00	50.800	0.413	10.490	76.00	13.300	0.510	12.954	39.000	173.472	1.150	29.21	0.090	2.29	11.80	SPR C Z
0.593	15.062	NN-87	2.00	50.800	0.313	7.950	502.00	87.850	0.230	5.842	115.000	511.520	1.750	44.45	0.140	3.56	12.50	SST CG N
0.593	15.062	S-820	2.06	52.324	0.465	11.811	11.00	1.925	1.100	27.940	13.000	57.824	0.930	23.62	0.064	1.63	14.50	SST CG N
0.593	15.062	12446	2.09	53.086	0.511	12.979	3.70	0.648	1.200	30.480	4.500	20.016	0.390	9.91	0.041	1.04	8.50	SPR C N
0.593	15.062	12739	2.13	54.102	0.547	13.894	0.48	0.084	2.000	50.800	0.940	4.181	0.170	4.32	0.023	0.58	6.50	MW C Z
0.593	15.062	S-1488	2.25	57.150	0.531	13.487	0.93	0.163	1.900	48.260	1.800	8.006	0.310	7.87	0.031	0.79	9.00	SST C N
0.593	15.062	WW-62	2.25	57.150	0.449	11.405	26.00	4.550	0.750	19.050	20.000	88.960	0.790	20.07	0.072	1.83	11.00	SST CG Z
0.593	15.062	12467	2.44	61.976	0.453	11.506	24.00	4.200	0.810	20.574	20.000	88.960	0.840	21.34	0.070	1.78	12.00	SPR CG Z
0.593	15.062	3326	2.50	63.500	0.449	11.405	27.00	4.725	0.780	19.812	21.000	93.408	0.860	21.84	0.072	1.83	12.00	HD CG Z
0.593	15.062	11614	2.53	64.262	0.449	11.405	27.00	4.725	0.800	20.320	21.000	93.408	0.950	24.13	0.072	1.83	12.30	SPR CG GI
0.593	15.062	11136	2.75	69.850	0.469	11.913	9.20	1.610	1.600	40.640	14.000	62.272	1.150	29.21	0.062	1.57	17.50	SPR C Z
0.593	15.062	1695	2.75	69.850	0.457	11.608	17.00	2.975	1.600	40.640	26.000	115.648	1.000	25.40	0.068	1.73	14.80	MW CG Z
0.593	15.062	237	2.75	69.850	0.449	11.405	25.00	4.375	0.850	21.590	21.000	93.408	0.940	23.88	0.072	1.83	13.00	SPR CG Z
0.593	15.062	K-38	3.00	76.200	0.499	12.675	1.50	0.263	1.500	38.100	2.100	9.341	1.540	39.12	0.047	1.19	31.70	SPR C Z
0.593	15.062	S-432	3.00	76.200	0.449	11.405	15.00	2.625	1.300	33.020	20.000	88.960	1.270	32.26	0.072	1.83	17.50	SST CG N
0.593	15.062	11729	3.00	76.200	0.433	10.998	27.00	4.725	1.100	27.940	29.000	128.992	1.440	36.58	0.080	2.03	18.00	SPR CG GI
0.593	15.062	3090	3.00	76.200	0.383	9.728	90.00	15.750	0.680	17.272	61.000	271.328	1.970	50.04	0.105	2.67	18.80	SPR CG Z
0.593	15.062	11795	3.03	76.962	0.451	11.455	15.00	2.625	1.300	33.020	20.000	88.960	1.350	34.29	0.071	1.80	19.00	SPR CG Z
0.593	15.062	2772	3.13	79.502	0.499	12.675	2.00	0.350	2.000	50.800	3.900	17.347	1.130	28.70	0.047	1.19	24.00	HD CG Z
0.593	15.062	3950	3.50	88.900	0.449	11.405	27.00	4.725	0.780	19.812	21.000	93.408	0.860	21.84	0.072	1.83	12.00	SPR CG Z
0.593	15.062	11663	3.50	88.900	0.445	11.303	21.00	3.675	1.100	27.940	23.000	102.304	1.260	32.00	0.074	1.88	17.00	SPR CG Z
0.593	15.062	10560	3.50	88.900	0.393	9.982	58.00	10.150	0.910	23.114	53.000	235.744	2.280	57.91	0.100	2.54	22.80	SPR CG Z
0.593	15.062	10228	4.00	101.600	0.527	13.386	0.49	0.086	3.200	81.280	1.600	7.117	0.760	19.30	0.033	0.84	22.00	SPR C Z
0.593	15.062	1611	4.00	101.600	0.383	9.728	88.00	15.400	0.690	17.526	61.000	271.328	2.000	50.80	0.105	2.67	19.00	SPR CG Z
0.593	15.062	10636	4.00	101.600	0.367	9.322	88.00	15.400	0.820	20.828	72.000	320.256	2.940	74.68	0.113	2.87	26.00	SPR CG Z
0.593	15.062	11769	4.31	109.474	0.433	10.998	22.00	3.850	1.300	33.020	29.000	128.992	1.760	44.70	0.080	2.03	22.00	SPR CG Z
0.593	15.062	1815	5.38	136.652	0.411	10.439	33.00	5.775	1.700	43.180	56.000	249.088	2.320	58.93	0.091	2.31	25.50	MW CG Z
0.593	15.062	1521	5.50	139.700	0.411	10.439	31.00	5.425	1.300	33.020	40.000	177.920	2.460	62.48	0.091	2.31	27.00	HD CG Z
0.593	15.062	12178	5.75	146.050	0.413	10.490	24.00	4.200	1.600	40.640	39.000	173.472	2.970	75.44	0.090	2.29	33.00	SPR CG Z
0.593	15.062	10681	6.00	152.400	0.411	10.439	19.00	3.325	2.100	53.340	40.000	177.920	3.910	99.31	0.091	2.31	43.00	SPR CG Z
0.593	15.062	2902	6.25	158.750	0.423	10.744	19.00	3.325	1.800	45.720	34.000	151.232	2.720	69.09	0.085	2.16	32.00	SPR CG Z
0.6	15.240	71711	0.50	12.700	0.510	12.954	23.00	4.025	0.340	8.636	7.900	35.139	0.160	4.06	0.045	1.14	3.50	MW CG N
0.6	15.240	71711S	0.50	12.700	0.510	12.954	20.00	3.500	0.280	7.112	5.500	24.464	0.160	4.06	0.045	1.14	3.50	SST CG N
0.6	15.240	71712	0.63	16.002	0.510	12.954	18.00	3.150	0.450	11.430	8.200	36.474	0.170	4.32	0.045	1.14	3.88	MW CG N
0.6	15.240	71712S	0.63	16.002	0.510	12.954	15.00	2.625	0.360	9.144	5.500	24.464	0.170	4.32	0.045	1.14	3.88	SST CG N
0.6	15.240	71729	0.63	16.002	0.502	12.751	28.00	4.900	0.380	9.652	11.000	48.928	0.180	4.57	0.049	1.24	3.75	MW CG N
0.6	15.240	71729S	0.63	16.002	0.502	12.751	24.00	4.200	0.300	7.620	7.100	31.581	0.180	4.57	0.049	1.24	3.75	SST CG N
0.6	15.240	71741	0.63	16.002	0.490	12.446	40.00	7.000	0.350	8.890	14.000	62.272	0.220	5.59	0.055	1.40	4.00	MW CG N
0.6	15.240	71741S	0.63	16.002	0.490	12.446	34.00	5.950	0.280	7.112	9.400	41.811	0.220	5.59	0.055	1.40	4.00	SST CG N
0.6	15.240	71753	0.63	16.002	0.482	12.243	53.00	9.275	0.320	8.128	17.000	75.616	0.240	6.10	0.059	1.50	4.13	MW CG N
0.6	15.240	71753S	0.63	16.002	0.482	12.243	45.00	7.875	0.260	6.604	12.000	53.376						




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h
0.6	15.240	71804S	0.75 19.050	0.438 11.125	135.00 23.625	0.211 5.359	29.000 128.992	0.411 10.44	0.082 2.08	5.00	SST	CG N
0.6	15.240	71820	0.75 19.050	0.430 10.922	204.00 35.700	0.230 5.842	48.000 213.504	0.400 10.16	0.085 2.16	4.75	MW	CG N
0.6	15.240	71820S	0.75 19.050	0.430 10.922	173.00 30.275	0.180 4.572	32.000 142.336	0.400 10.16	0.085 2.16	4.75	SST	CG N
0.6	15.240	71835	0.75 19.050	0.416 10.566	292.00 51.100	0.200 5.080	57.000 253.536	0.440 11.18	0.092 2.34	4.75	MW	CG N
0.6	15.240	71835S	0.75 19.050	0.416 10.566	248.00 43.400	0.150 3.810	38.000 169.024	0.440 11.18	0.092 2.34	4.75	SST	CG N
0.6	15.240	71850	0.75 19.050	0.404 10.262	388.00 67.900	0.180 4.572	69.000 306.912	0.470 11.94	0.098 2.49	4.75	MW	CG N
0.6	15.240	71850S	0.75 19.050	0.404 10.262	330.00 57.750	0.140 3.556	46.000 204.608	0.470 11.94	0.098 2.49	4.75	SST	CG N
0.6	15.240	71714	0.88 22.352	0.510 12.954	12.00 2.100	0.660 16.764	7.900 35.139	0.220 5.59	0.045 1.14	4.88	MW	CG N
0.6	15.240	71714S	0.88 22.352	0.510 12.954	10.00 1.750	0.540 13.716	5.500 24.464	0.220 5.59	0.045 1.14	4.88	SST	CG N
0.6	15.240	71731	0.88 22.352	0.502 12.751	19.00 3.325	0.550 13.970	11.000 48.928	0.230 5.84	0.049 1.24	4.63	MW	CG N
0.6	15.240	71731S	0.88 22.352	0.502 12.751	16.00 2.800	0.440 11.176	7.100 31.581	0.230 5.84	0.049 1.24	4.63	SST	CG N
0.6	15.240	71743	0.88 22.352	0.490 12.446	28.00 4.900	0.500 12.700	14.000 62.272	0.280 7.11	0.055 1.40	5.00	MW	CG N
0.6	15.240	71743S	0.88 22.352	0.490 12.446	23.00 4.025	0.400 10.160	9.400 41.811	0.280 7.11	0.055 1.40	5.00	SST	CG N
0.6	15.240	71755	0.88 22.352	0.482 12.243	35.00 6.125	0.490 12.446	17.000 75.616	0.300 7.62	0.059 1.50	5.13	MW	CG N
0.6	15.240	71755S	0.88 22.352	0.482 12.243	30.00 5.250	0.390 9.906	12.000 53.376	0.300 7.62	0.059 1.50	5.13	SST	CG N
0.6	15.240	71767S	0.88 22.352	0.474 12.040	38.00 6.650	0.358 9.093	13.600 60.493	0.322 8.18	0.063 1.59	5.10	SST	CG N
0.6	15.240	71767	0.88 22.352	0.474 12.040	45.00 7.875	0.470 11.938	21.000 93.408	0.330 8.38	0.063 1.60	5.25	MW	CG N
0.6	15.240	71781	0.88 22.352	0.466 11.836	50.00 8.750	0.490 12.446	24.000 106.752	0.390 9.91	0.067 1.70	5.88	MW	Z
0.6	15.240	71781S	0.88 22.352	0.466 11.836	43.00 7.525	0.400 10.160	17.000 75.616	0.390 9.91	0.067 1.70	5.88	SST	CG N
0.6	15.240	71793	0.88 22.352	0.456 11.582	68.00 11.900	0.430 10.922	29.000 128.992	0.420 10.67	0.072 1.83	5.88	MW	CG N
0.6	15.240	71793S	0.88 22.352	0.456 11.582	58.00 10.150	0.340 8.636	20.000 88.960	0.420 10.67	0.072 1.83	5.88	SST	CG N
0.6	15.240	71805	0.88 22.352	0.438 11.125	131.00 22.925	0.320 8.128	41.000 182.368	0.440 11.18	0.081 2.06	5.38	MW	CG N
0.6	15.240	71805S	0.88 22.352	0.438 11.125	111.00 19.425	0.256 6.502	29.000 128.992	0.464 11.79	0.082 2.08	5.70	SST	CG N
0.6	15.240	71821	0.88 22.352	0.430 10.922	166.00 29.050	0.290 7.366	48.000 213.504	0.450 11.43	0.085 2.16	5.25	MW	CG N
0.6	15.240	71821S	0.88 22.352	0.430 10.922	141.00 24.675	0.230 5.842	32.000 142.336	0.450 11.43	0.085 2.16	5.25	SST	CG N
0.6	15.240	71836	0.88 22.352	0.416 10.566	237.00 41.475	0.240 6.096	57.000 253.536	0.490 12.45	0.092 2.34	5.38	MW	CG N
0.6	15.240	71836S	0.88 22.352	0.416 10.566	201.00 35.175	0.190 4.826	38.000 169.024	0.490 12.45	0.092 2.34	5.38	SST	CG N
0.6	15.240	71851	0.88 22.352	0.404 10.262	314.00 54.950	0.220 5.588	69.000 306.912	0.530 13.46	0.098 2.49	5.38	MW	CG N
0.6	15.240	71851S	0.88 22.352	0.404 10.262	267.00 46.725	0.170 4.318	46.000 204.608	0.530 13.46	0.098 2.49	5.38	SST	CG N
0.6	15.240	71715	1.00 25.400	0.510 12.954	9.90 1.733	0.750 19.050	7.400 32.915	0.250 6.35	0.045 1.14	5.50	MW	Z
0.6	15.240	71715S	1.00 25.400	0.510 12.954	8.70 1.523	0.640 16.256	5.500 24.464	0.240 6.10	0.045 1.14	5.38	SST	CG N
0.6	15.240	71732	1.00 25.400	0.502 12.751	16.00 2.800	0.650 16.510	11.000 48.928	0.250 6.35	0.049 1.24	5.13	MW	CG N
0.6	15.240	71732S	1.00 25.400	0.502 12.751	14.00 2.450	0.520 13.208	7.100 31.581	0.250 6.35	0.049 1.24	5.13	SST	CG N
0.6	15.240	71744	1.00 25.400	0.490 12.446	24.00 4.200	0.420 14.732	14.000 62.272	0.300 7.62	0.055 1.40	5.38	MW	CG N
0.6	15.240	71744S	1.00 25.400	0.490 12.446	20.00 3.500	0.460 11.684	9.400 41.811	0.300 7.62	0.055 1.40	5.38	SST	CG N
0.6	15.240	71756	1.00 25.400	0.482 12.243	30.00 5.250	0.560 14.224	17.000 75.616	0.330 8.38	0.059 1.50	5.63	MW	CG N
0.6	15.240	71756S	1.00 25.400	0.482 12.243	26.00 4.550	0.450 11.430	12.000 53.376	0.330 8.38	0.059 1.50	5.63	SST	CG N
0.6	15.240	71768S	1.00 25.400	0.474 12.040	32.00 5.600	0.425 10.795	13.600 60.493	0.365 9.27	0.063 1.59	5.80	SST	CG N
0.6	15.240	71768	1.00 25.400	0.474 12.040	38.00 6.650	0.550 13.970	21.000 93.408	0.370 9.40	0.063 1.60	5.88	MW	CG N
0.6	15.240	71782	1.00 25.400	0.466 11.836	45.00 7.875	0.550 13.970	25.000 111.200	0.420 10.67	0.067 1.70	6.25	MW	CG N
0.6	15.240	71782S	1.00 25.400	0.466 11.836	38.00 6.650	0.440 11.176	17.000 75.616	0.420 10.67	0.067 1.70	6.25	SST	CG N
0.6	15.240	71794	1.00 25.400	0.456 11.582	55.00 9.625	0.510 12.954	28.000 124.544	0.490 12.45	0.072 1.83	6.75	MW	CG N
0.6	15.240	71794S	1.00 25.400	0.456 11.582	47.00 8.225	0.420 10.668	20.000 88.960	0.490 12.45	0.072 1.83	6.75	SST	CG N
0.6	15.240	71806	1.00 25.400	0.438 11.125	112.00 19.600	0.370 9.398	41.000 182.368	0.490 12.45	0.081 2.06	6.00	MW	CG N
0.6	15.240	71806S	1.00 25.400	0.438 11.125	95.00 16.625	0.300 7.620	29.000 128.992	0.515 13.08	0.082 2.08	6.30	SST	CG N
0.6	15.240	71822	1.00 25.400	0.430 10.922	142.00 24.850	0.330 8.382	48.000 213.504	0.500 12.70	0.085 2.16	5.88	MW	CG N
0.6	15.240	71822S	1.00 25.400	0.430 10.922	121.00 21.175	0.260 6.604	32.000 142.336	0.500 12.70	0.085 2.16	5.88	SST	CG N
0.6	15.240	71823	1.00 25.400	0.416 10.566	202.00 35.350	0.280 7.112	57.000 253.536	0.540 13.72	0.092 2.34	5.88	MW	CG N
0.6	15.240	71823S	1.00 25.400	0.416 10.566	172.00 30.100	0.220 5.588	38.000 169.024	0.540 13.72	0.092 2.34	5.88	SST	CG N
0.6	15.240	71852	1.00 25.400	0.404 10.262	267.00 46.725	0.260 6.604	69.000 306.912	0.580 14.73	0.098 2.49	5.88	MW	CG N
0.6	15.240	71852S	1.00 25.400	0.404 10.262	227.00 39.725	0.200 5.080	46.000 204.608	0.580 14.73	0.098 2.49	5.88	SST	CG N
0.6	15.240	71716	1.25 31.750	0.510 12.954	8.00 1.400	0.970 24.638	7.800 34.694	0.280 7.11	0.045 1.14	6.25	MW	CG N
0.6	15.240	71716S	1.25 31.750	0.510 12.954	6.80 1.190	0.810 20.574	5.500 24.464	0.280 7.11	0.045 1.14	6.25	SST	CG N
0.6	15.240	71733	1.25 31.750	0.502 12.751	13.00 2.275	0.820 20.828	11.000 48.928	0.290 7.37	0.049 1.24	5.88	MW	CG N
0.6	15.240	71733S	1.25 31.750	0.502 12.751	11.00 1.925	0.650 16.510	7.100 31.581	0.290 7.37	0.049 1.24	5.88	SST	CG N
0.6	15.240	71745	1.25 31.750	0.490 12.446	19.00 3.325	0.750 19.050	14.000 62.272	0.350 8.89	0.055 1.40	6.38	MW	CG N
0.6	15.240	71745S	1.25 31.750	0.490 12.446	16.00 2.800	0.600 15.240	9.400 41.811	0.350 8.89	0.055 1.40	6.38	SST	CG N
0.6	15.240	71757	1.25 31.750	0.482 12.243	24.00 4.200	0.710 18.034	17.000 75.616	0.390 9.91	0.059 1.50	6.63	MW	CG N
0.6	15.240	71757S	1.25 31.750	0.482 12.243	20.00 3.500	0.570 14.478	12.000 53.376	0.390 9.91	0.059 1.50	6.63	SST	CG N
0.6	15.240	71769S	1.25 31.750	0.474 12.040	26.00 4.550	0.523 13.284	13.600 60.493	0.420 10.67	0.063 1.59	6.70	SST	CG N
0.6	15.240	71769	1.25 31.750	0.474 12.040	31.00 5.425	0.680 17.272	21.000 93.408	0.430 10.92	0.063 1.60	6.75	MW	CG N
0.6	15.240	71783	1.25 31.750	0.466 11.836	35.00 6.125	0.710 18.034	25.000 111.200	0.500 12.70	0.067 1.70	7.50	MW	CG N
0.6	15.240	71783S	1.25 31.750	0.466 11.836	30.00 5.25							




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.6	15.240	71734S	1.50	38.100	0.502	12.751	8.70	1.523	0.820	20.828	7.100	31.581	0.340	8.64	0.049	1.24	6.88	SST	CG	N
0.6	15.240	71746	1.50	38.100	0.490	12.446	15.00	2.625	0.930	23.622	14.000	62.272	0.410	10.41	0.055	1.40	7.38	MW	CG	N
0.6	15.240	71746S	1.50	38.100	0.490	12.446	13.00	2.275	0.740	18.796	9.400	41.811	0.410	10.41	0.055	1.40	7.38	SST	CG	N
0.6	15.240	71758	1.50	38.100	0.482	12.243	19.00	3.325	0.890	22.606	17.000	75.616	0.460	11.68	0.059	1.50	7.75	MW	CG	N
0.6	15.240	71758S	1.50	38.100	0.482	12.243	16.00	2.800	0.710	18.034	12.000	53.376	0.460	11.68	0.059	1.50	7.75	SST	CG	N
0.6	15.240	71770S	1.50	38.100	0.474	12.040	20.00	3.500	0.680	17.272	13.600	60.493	0.509	12.93	0.063	1.59	8.10	SST	CG	N
0.6	15.240	71770	1.50	38.100	0.474	12.040	24.00	4.200	0.860	21.844	21.000	93.408	0.510	12.95	0.063	1.60	8.13	MW	CG	N
0.6	15.240	71784	1.50	38.100	0.466	11.836	29.00	5.075	0.860	21.844	25.000	111.200	0.580	14.73	0.067	1.70	8.63	MW	CG	N
0.6	15.240	71784S	1.50	38.100	0.466	11.836	25.00	4.375	0.680	17.272	17.000	75.616	0.580	14.73	0.067	1.70	8.63	SST	CG	N
0.6	15.240	71796	1.50	38.100	0.456	11.582	36.00	6.300	0.810	20.574	29.000	128.992	0.670	17.02	0.072	1.83	9.25	MW	CG	N
0.6	15.240	71796S	1.50	38.100	0.456	11.582	31.00	5.425	0.640	16.256	20.000	88.960	0.670	17.02	0.072	1.83	9.25	SST	CG	N
0.6	15.240	71808	1.50	38.100	0.438	11.125	70.00	12.250	0.590	14.986	41.000	182.368	0.680	17.27	0.081	2.06	8.38	MW	CG	N
0.6	15.240	71808S	1.50	38.100	0.438	11.125	59.00	10.325	0.482	12.243	29.000	128.992	0.729	18.52	0.082	2.08	8.90	SST	CG	N
0.6	15.240	71824	1.50	38.100	0.430	10.922	89.00	15.575	0.540	13.716	48.000	213.504	0.700	17.78	0.085	2.16	8.25	MW	CG	N
0.6	15.240	71824S	1.50	38.100	0.430	10.922	75.00	13.125	0.420	10.668	32.000	142.336	0.700	17.78	0.085	2.16	8.25	SST	CG	N
0.6	15.240	71839	1.50	38.100	0.416	10.566	125.00	21.875	0.460	11.684	57.000	253.536	0.760	19.30	0.092	2.34	8.25	MW	CG	N
0.6	15.240	71839S	1.50	38.100	0.416	10.566	107.00	18.725	0.360	9.144	38.000	169.024	0.760	19.30	0.092	2.34	8.25	SST	CG	N
0.6	15.240	71854	1.50	38.100	0.404	10.262	165.00	28.875	0.420	10.668	69.000	306.912	0.820	20.83	0.098	2.49	8.38	MW	CG	N
0.6	15.240	71854S	1.50	38.100	0.404	10.262	140.00	24.500	0.330	8.382	46.000	204.608	0.820	20.83	0.098	2.49	8.38	SST	CG	N
0.6	15.240	71720	1.75	44.450	0.510	12.954	5.50	0.963	1.400	35.560	7.600	33.805	0.370	9.40	0.045	1.14	8.25	MW	CG	N
0.6	15.240	71720S	1.75	44.450	0.510	12.954	4.70	0.823	1.200	30.480	5.500	24.464	0.370	9.40	0.045	1.14	8.25	SST	CG	N
0.6	15.240	71735	1.75	44.450	0.502	12.751	8.70	1.523	1.200	30.480	11.000	48.928	0.380	9.65	0.049	1.24	7.75	MW	CG	N
0.6	15.240	71735S	1.75	44.450	0.502	12.751	7.40	1.295	0.970	24.638	7.100	31.581	0.380	9.65	0.049	1.24	7.75	SST	CG	N
0.6	15.240	71747	1.75	44.450	0.490	12.446	13.00	2.275	1.100	27.940	14.000	62.272	0.450	11.43	0.055	1.40	8.25	MW	CG	N
0.6	15.240	71747S	1.75	44.450	0.490	12.446	11.00	1.925	0.860	21.844	9.400	41.811	0.450	11.43	0.055	1.40	8.25	SST	CG	N
0.6	15.240	71759	1.75	44.450	0.482	12.243	16.00	2.800	1.100	27.940	17.000	75.616	0.520	13.21	0.059	1.50	8.75	MW	CG	N
0.6	15.240	71759S	1.75	44.450	0.482	12.243	14.00	2.450	0.840	21.336	12.000	53.376	0.520	13.21	0.059	1.50	8.75	SST	CG	N
0.6	15.240	71771S	1.75	44.450	0.474	12.040	17.00	2.975	0.799	20.295	13.600	60.493	0.577	14.66	0.063	1.59	9.20	SST	CG	N
0.6	15.240	71771	1.75	44.450	0.474	12.040	20.00	3.500	1.000	25.400	21.000	93.408	0.570	14.48	0.063	1.60	9.13	MW	CG	N
0.6	15.240	71785	1.75	44.450	0.466	11.836	24.00	4.200	1.100	27.940	25.000	111.200	0.680	17.27	0.067	1.70	10.10	MW	CG	N
0.6	15.240	71785S	1.75	44.450	0.466	11.836	20.00	3.500	0.840	21.336	17.000	75.616	0.680	17.27	0.067	1.70	10.10	SST	CG	N
0.6	15.240	71797	1.75	44.450	0.456	11.582	30.00	5.250	0.980	24.892	29.000	128.992	0.770	19.56	0.072	1.83	10.80	MW	CG	N
0.6	15.240	71797S	1.75	44.450	0.456	11.582	26.00	4.550	0.770	19.558	20.000	88.960	0.770	19.56	0.072	1.83	10.80	SST	CG	N
0.6	15.240	71809	1.75	44.450	0.438	11.125	59.00	10.325	0.700	17.780	41.000	182.368	0.770	19.56	0.081	2.06	9.50	MW	CG	N
0.6	15.240	71809S	1.75	44.450	0.438	11.125	50.00	8.750	0.569	14.453	29.000	128.992	0.831	21.11	0.082	2.08	10.10	SST	CG	N
0.6	15.240	71825	1.75	44.450	0.430	10.922	75.00	13.125	0.640	16.256	48.000	213.504	0.800	20.32	0.085	2.16	9.38	MW	CG	N
0.6	15.240	71825S	1.75	44.450	0.430	10.922	64.00	11.200	0.500	12.700	32.000	142.336	0.800	20.32	0.085	2.16	9.38	SST	CG	N
0.6	15.240	71840	1.75	44.450	0.416	10.566	105.00	18.375	0.550	13.970	57.000	253.536	0.870	22.10	0.092	2.34	9.50	MW	CG	N
0.6	15.240	71840S	1.75	44.450	0.416	10.566	90.00	15.750	0.430	10.922	38.000	169.024	0.870	22.10	0.092	2.34	9.50	SST	CG	N
0.6	15.240	71855	1.75	44.450	0.404	10.262	118.00	20.650	0.390	9.906	46.000	204.608	0.940	23.88	0.098	2.49	9.63	SST	CG	N
0.6	15.240	71721	2.00	50.800	0.510	12.954	5.30	0.928	1.600	40.640	8.200	36.474	0.380	9.65	0.045	1.14	8.50	MW	CG	N
0.6	15.240	71721S	2.00	50.800	0.510	12.954	4.50	0.788	1.200	30.480	5.500	24.464	0.380	9.65	0.045	1.14	8.50	SST	CG	N
0.6	15.240	71736	2.00	50.800	0.502	12.751	7.60	1.330	1.400	35.560	11.000	48.928	0.420	10.67	0.049	1.24	8.50	MW	CG	N
0.6	15.240	71748	2.00	50.800	0.490	12.446	11.00	1.925	1.200	30.480	14.000	62.272	0.510	12.95	0.055	1.40	9.25	MW	CG	N
0.6	15.240	71748S	2.00	50.800	0.490	12.446	9.50	1.663	0.990	25.146	9.400	41.811	0.510	12.95	0.055	1.40	9.25	SST	CG	N
0.6	15.240	71760	2.00	50.800	0.482	12.243	14.00	2.450	1.200	30.480	17.000	75.616	0.580	14.73	0.059	1.50	9.75	MW	CG	N
0.6	15.240	71760S	2.00	50.800	0.482	12.243	12.00	2.100	0.960	24.384	12.000	53.376	0.580	14.73	0.059	1.50	9.75	SST	CG	N
0.6	15.240	71772S	2.00	50.800	0.474	12.040	15.00	2.625	0.906	23.012	13.600	60.493	0.637	16.18	0.063	1.59	10.20	SST	CG	N
0.6	15.240	71772	2.00	50.800	0.474	12.040	18.00	3.150	1.200	30.480	21.000	93.408	0.650	16.51	0.063	1.60	10.30	MW	CG	N
0.6	15.240	71786	2.00	50.800	0.466	11.836	21.00	3.675	1.200	30.480	25.000	111.200	0.750	19.05	0.067	1.70	11.10	SST	CG	N
0.6	15.240	71798	2.00	50.800	0.456	11.582	27.00	4.725	1.100	27.940	29.000	128.992	0.850	21.59	0.072	1.83	11.80	MW	CG	N
0.6	15.240	71798S	2.00	50.800	0.456	11.582	23.00	4.025	0.860	21.844	20.000	88.960	0.850	21.59	0.072	1.83	11.80	SST	CG	N
0.6	15.240	71810	2.00	50.800	0.438	11.125	51.00	8.92												




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
0.6	15.240	71827S	2.25 57.150	0.430 10.922	48.00 8.400	0.660 16.764	32.000 142.336	0.990 25.15	0.085 2.16	11.60	SST	CG N
0.6	15.240	71842	2.25 57.150	0.416 10.566	80.00 14.000	0.720 18.288	57.000 253.536	1.090 27.69	0.092 2.34	11.90	MW	CG N
0.6	15.240	71842S	2.25 57.150	0.416 10.566	68.00 11.900	0.560 14.224	38.000 169.024	1.090 27.69	0.092 2.34	11.90	SST	CG N
0.6	15.240	71857	2.25 57.150	0.404 10.262	105.00 18.375	0.660 16.764	69.000 306.912	1.180 29.97	0.098 2.49	12.00	MW	CG N
0.6	15.240	71857S	2.25 57.150	0.404 10.262	89.00 15.575	0.510 12.954	46.000 204.608	1.180 29.97	0.098 2.49	12.00	SST	CG N
0.6	15.240	71723	2.50 63.500	0.510 12.954	4.20 0.735	2.000 50.800	8.200 36.474	0.460 11.68	0.045 1.14	10.30	MW	CG N
0.6	15.240	71723S	2.50 63.500	0.510 12.954	3.50 0.613	1.600 40.640	5.500 24.464	0.460 11.68	0.045 1.14	10.30	SST	CG N
0.6	15.240	71738	2.50 63.500	0.502 12.751	5.90 1.033	1.800 45.720	11.000 48.928	0.510 12.95	0.049 1.24	10.40	MW	CG N
0.6	15.240	71738S	2.50 63.500	0.502 12.751	5.00 0.875	1.400 35.560	7.100 31.581	0.510 12.95	0.049 1.24	10.40	SST	CG N
0.6	15.240	71750	2.50 63.500	0.490 12.446	8.90 1.558	1.600 40.640	14.000 62.272	0.610 15.49	0.055 1.40	11.10	MW	CG N
0.6	15.240	71750S	2.50 63.500	0.490 12.446	7.60 1.330	1.200 30.480	9.400 41.811	0.610 15.49	0.055 1.40	11.10	SST	CG N
0.6	15.240	71762	2.50 63.500	0.482 12.243	11.00 1.925	1.500 38.100	17.000 75.616	0.690 17.53	0.059 1.50	11.80	MW	CG N
0.6	15.240	71762S	2.50 63.500	0.482 12.243	9.60 1.680	1.200 30.480	12.000 53.376	0.690 17.53	0.059 1.50	11.80	SST	CG N
0.6	15.240	71774S	2.50 63.500	0.474 12.040	12.00 2.100	1.133 28.778	13.600 60.493	0.765 19.43	0.063 1.59	12.20	SST	CG N
0.6	15.240	71774	2.50 63.500	0.474 12.040	14.00 2.450	1.500 38.100	21.000 93.408	0.780 19.81	0.063 1.60	12.40	MW	CG N
0.6	15.240	71788	2.50 63.500	0.466 11.836	16.00 2.800	1.500 38.100	25.000 111.200	0.920 23.37	0.067 1.70	13.80	MW	CG N
0.6	15.240	71788S	2.50 63.500	0.466 11.836	14.00 2.450	1.200 30.480	17.000 75.616	0.920 23.37	0.067 1.70	13.80	SST	CG N
0.6	15.240	71800	2.50 63.500	0.456 11.582	22.00 3.850	1.300 33.020	29.000 128.992	1.000 25.40	0.072 1.83	13.90	MW	CG N
0.6	15.240	71800S	2.50 63.500	0.456 11.582	19.00 3.325	1.000 25.400	20.000 88.960	1.000 25.40	0.072 1.83	13.90	SST	CG N
0.6	15.240	71812	2.50 63.500	0.438 11.125	40.00 7.000	1.000 25.400	41.000 182.368	1.050 26.67	0.081 2.06	13.00	MW	CG N
0.6	15.240	71812S	2.50 63.500	0.438 11.125	34.00 5.950	0.837 21.260	29.000 128.992	1.145 29.08	0.082 2.08	14.00	SST	CG N
0.6	15.240	71828	2.50 63.500	0.430 10.922	51.00 8.925	0.940 23.876	48.000 213.504	1.090 27.69	0.085 2.16	12.90	MW	CG N
0.6	15.240	71828S	2.50 63.500	0.430 10.922	43.00 7.525	0.740 18.796	32.000 142.336	1.090 27.69	0.085 2.16	12.90	SST	CG N
0.6	15.240	71843	2.50 63.500	0.416 10.566	71.00 12.425	0.810 20.574	57.000 253.536	1.200 30.48	0.092 2.34	13.00	MW	CG N
0.6	15.240	71843S	2.50 63.500	0.416 10.566	61.00 10.675	0.630 16.002	38.000 169.024	1.200 30.48	0.092 2.34	13.00	SST	CG N
0.6	15.240	71858	2.50 63.500	0.404 10.262	93.00 16.275	0.740 18.796	69.000 306.912	1.300 33.02	0.098 2.49	13.30	MW	CG N
0.6	15.240	71858S	2.50 63.500	0.404 10.262	79.00 13.825	0.580 14.732	46.000 204.608	1.300 33.02	0.098 2.49	13.30	SST	CG N
0.6	15.240	71724	2.75 69.850	0.510 12.954	3.60 0.630	2.200 55.880	8.000 35.584	0.520 13.21	0.045 1.14	11.60	MW	CG N
0.6	15.240	71724S	2.75 69.850	0.510 12.954	3.10 0.543	1.800 45.720	5.500 24.464	0.520 13.21	0.045 1.14	11.60	SST	CG N
0.6	15.240	71739	2.75 69.850	0.502 12.751	5.30 0.928	2.000 50.800	11.000 48.928	0.560 14.22	0.049 1.24	11.40	MW	CG N
0.6	15.240	71739S	2.75 69.850	0.502 12.751	4.50 0.788	1.600 40.640	7.100 31.581	0.560 14.22	0.049 1.24	11.40	SST	CG N
0.6	15.240	71751	2.75 69.850	0.490 12.446	8.00 1.400	1.700 43.180	14.000 62.272	0.670 17.02	0.055 1.40	12.10	MW	CG N
0.6	15.240	71751S	2.75 69.850	0.490 12.446	6.80 1.190	1.400 35.560	9.400 41.811	0.670 17.02	0.055 1.40	12.10	SST	CG N
0.6	15.240	71763	2.75 69.850	0.482 12.243	9.80 1.715	1.800 45.720	17.000 75.616	0.780 19.81	0.059 1.50	13.30	MW	CG N
0.6	15.240	71763S	2.75 69.850	0.482 12.243	8.30 1.453	1.400 35.560	12.000 53.376	0.780 19.81	0.059 1.50	13.30	SST	CG N
0.6	15.240	71775S	2.75 69.850	0.474 12.040	11.00 1.925	1.236 31.394	13.600 60.493	0.823 20.90	0.063 1.59	13.20	SST	CG N
0.6	15.240	71775	2.75 69.850	0.474 12.040	13.00 2.275	1.600 40.640	21.000 93.408	0.830 21.08	0.063 1.60	13.30	MW	CG N
0.6	15.240	71789	2.75 69.850	0.466 11.836	15.00 2.625	1.600 40.640	25.000 111.200	0.990 25.15	0.067 1.70	14.80	MW	CG N
0.6	15.240	71789S	2.75 69.850	0.466 11.836	13.00 2.275	1.300 33.020	17.000 75.616	0.990 25.15	0.067 1.70	14.80	SST	CG N
0.6	15.240	71801	2.75 69.850	0.456 11.582	20.00 3.500	1.500 38.100	29.000 128.992	1.090 27.69	0.072 1.83	15.10	MW	CG N
0.6	15.240	71801S	2.75 69.850	0.456 11.582	17.00 2.975	1.200 30.480	20.000 88.960	1.090 27.69	0.072 1.83	15.10	SST	CG N
0.6	15.240	71813	2.75 69.850	0.438 11.125	36.00 6.300	1.100 27.940	41.000 182.368	1.150 29.21	0.081 2.06	14.30	MW	CG N
0.6	15.240	71813S	2.75 69.850	0.438 11.125	31.00 5.425	0.918 23.317	29.000 128.992	1.240 31.50	0.082 2.08	15.10	SST	CG N
0.6	15.240	71829	2.75 69.850	0.430 10.922	46.00 8.050	1.000 25.400	48.000 213.504	1.190 30.23	0.085 2.16	14.00	MW	CG N
0.6	15.240	71829S	2.75 69.850	0.430 10.922	39.00 6.825	0.820 20.828	32.000 142.336	1.190 30.23	0.085 2.16	14.00	SST	CG N
0.6	15.240	71844	2.75 69.850	0.416 10.566	64.00 11.200	0.890 22.606	57.000 253.536	1.310 33.27	0.092 2.34	14.30	MW	CG N
0.6	15.240	71844S	2.75 69.850	0.416 10.566	55.00 9.625	0.700 17.780	38.000 169.024	1.310 33.27	0.092 2.34	14.30	SST	CG N
0.6	15.240	71859	2.75 69.850	0.404 10.262	84.00 14.700	0.820 20.828	69.000 306.912	1.420 36.07	0.098 2.49	14.50	MW	CG N
0.6	15.240	71859S	2.75 69.850	0.404 10.262	71.00 12.425	0.640 16.256	46.000 204.608	1.420 36.07	0.098 2.49	14.50	SST	CG N
0.6	15.240	71725	3.00 76.200	0.510 12.954	3.30 0.578	2.400 60.960	8.000 35.584	0.560 14.22	0.045 1.14	12.50	MW	CG N
0.6	15.240	71725S	3.00 76.200	0.510 12.954	2.80 0.490	2.000 50.800	5.500 24.464	0.560 14.22	0.045 1.14	12.50	SST	CG N
0.6	15.240	71740	3.00 76.200	0.502 12.751	4.80 0.840	2.200 55.880	11.000 48.928	0.600 15.24	0.049 1.24	12.30	MW	CG N
0.6	15.240	71740S	3.00 76.200	0.502 12.751	4.10 0.718	1.700 43.180	7.100 31.581	0.600 15.24	0.049 1.24	12.30	SST	CG N
0.6	15.240	71752	3.00 76.200	0.490 12.446	7.30 1.278	1.900 48.260	14.000 62.272	0.720 18.29	0.055 1.40	13.10	MW	CG N
0.6	15.240	71752S	3.00 76.200	0.490 12.446	6.20 1.085	1.500 38.100	9.400 41.811	0.720 18.29	0.055 1.40	13.10	SST	CG N
0.6	15.240	71764	3.00 76.200	0.482 12.243	9.00 1.575	1.900 48.260	17.000 75.616	0.840 21.34	0.059 1.50	14.30	MW	CG N
0.6	15.240	71764S	3.00 76.200	0.482 12.243	7.60 1.330	1.300 38.100	12.000 53.376	0.840 21.34	0.059 1.50	14.30	SST	CG N
0.6	15.240	71776S	3.00 76.200	0.474 12.040	10.00 1.750	1.359 34.519	13.600 60.493	0.893 22.68	0.063 1.59	14.30	SST	CG N
0.6	15.240	71776	3.00 76.200	0.474 12.040	12.00 2.100	1.800 45.720	21.000 93.408	0.910 23.11	0.063 1.60	14.40	MW	CG N
0.6	15.240	71790	3.00 76.200	0.466 11.836	14.00 2.450	1.800 45.720	25.000 111.200	1.060 26.92	0.067 1.70	15.90	MW	CG N
0.6	15.240	71790S	3.00 76.200	0.466 11.836	12.00 2.100	1.400 35.560	17.000 75.616	1.060 26.92	0.067 1.70	15.90	SST	CG N
0.6	15.240	71802	3.00 76.200									




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
0.6	15.240	71831S	3.25 82.550	0.430 10.922	33.00 5.775	0.980 24.892	32.000 142.336	1.390 35.31	0.085 2.16	16.40	SST	CG N
0.6	15.240	71846	3.25 82.550	0.416 10.566	54.00 9.450	1.100 27.940	57.000 253.536	1.530 38.86	0.092 2.34	16.60	MW	CG N
0.6	15.240	71846S	3.25 82.550	0.416 10.566	46.00 8.050	0.830 21.082	38.000 169.024	1.530 38.86	0.092 2.34	16.60	SST	CG N
0.6	15.240	71861	3.25 82.550	0.404 10.262	70.00 12.250	0.980 24.892	69.000 306.912	1.650 41.91	0.098 2.49	16.90	MW	CG N
0.6	15.240	71861S	3.25 82.550	0.404 10.262	60.00 10.500	0.760 19.304	46.000 204.608	1.650 41.91	0.098 2.49	16.90	SST	CG N
0.6	15.240	12675	3.50 88.900	0.510 12.954	2.20 0.385	2.500 63.500	5.500 24.464	0.690 17.53	0.045 1.14	15.40	SST	CG N
0.6	15.240	71728	3.50 88.900	0.510 12.954	2.80 0.490	2.900 73.660	8.100 36.029	0.640 16.26	0.045 1.14	14.30	MW	CG N
0.6	15.240	71728S	3.50 88.900	0.510 12.954	2.40 0.420	2.300 58.420	5.500 24.464	0.640 16.26	0.045 1.14	14.30	SST	CG N
0.6	15.240	71778S	3.50 88.900	0.474 12.040	8.50 1.488	1.599 40.615	13.600 60.493	1.028 26.11	0.063 1.59	16.50	SST	CG N
0.6	15.240	71778	3.50 88.900	0.474 12.040	10.00 1.750	2.100 53.340	21.000 93.408	1.040 26.42	0.063 1.60	16.50	MW	CG N
0.6	15.240	71816	3.50 88.900	0.438 11.125	29.00 5.075	1.400 35.560	41.000 182.368	1.390 35.31	0.081 2.06	17.10	MW	CG N
0.6	15.240	71816S	3.50 88.900	0.438 11.125	25.00 4.375	1.138 28.905	29.000 128.992	1.498 38.05	0.082 2.08	18.30	SST	CG N
0.6	15.240	71832	3.50 88.900	0.430 10.922	36.00 6.300	1.300 33.020	48.000 213.504	1.490 37.85	0.085 2.16	17.50	MW	CG N
0.6	15.240	71832S	3.50 88.900	0.430 10.922	30.00 5.250	1.100 27.940	32.000 142.336	1.490 37.85	0.085 2.16	17.50	SST	CG N
0.6	15.240	71847	3.50 88.900	0.416 10.566	50.00 8.750	1.200 30.480	57.000 253.536	1.630 41.40	0.092 2.34	17.80	MW	CG N
0.6	15.240	71847S	3.50 88.900	0.416 10.566	42.00 7.350	0.900 22.860	38.000 169.024	1.630 41.40	0.092 2.34	17.80	SST	CG N
0.6	15.240	71862	3.50 88.900	0.404 10.262	65.00 11.375	1.100 27.940	69.000 306.912	1.780 45.21	0.098 2.49	18.10	MW	CG N
0.6	15.240	71862S	3.50 88.900	0.404 10.262	55.00 9.625	0.830 21.082	46.000 204.608	1.780 45.21	0.098 2.49	18.10	SST	CG N
0.6	15.240	71817	3.75 95.250	0.438 11.125	27.00 4.725	1.500 38.100	41.000 182.368	1.490 37.85	0.081 2.06	18.40	MW	CG N
0.6	15.240	71817S	3.75 95.250	0.438 11.125	23.00 4.025	1.237 31.420	29.000 128.992	1.614 41.00	0.082 2.08	19.70	SST	CG N
0.6	15.240	71833	3.75 95.250	0.430 10.922	33.00 5.775	1.400 35.560	48.000 213.504	1.580 40.13	0.085 2.16	18.60	MW	CG N
0.6	15.240	71833S	3.75 95.250	0.430 10.922	28.00 4.900	1.100 27.940	32.000 142.336	1.580 40.13	0.085 2.16	18.60	SST	CG N
0.6	15.240	71848	3.75 95.250	0.416 10.566	46.00 8.050	1.200 30.480	57.000 253.536	1.750 44.45	0.092 2.34	19.00	MW	CG N
0.6	15.240	71848S	3.75 95.250	0.416 10.566	39.00 6.825	0.970 24.638	38.000 169.024	1.750 44.45	0.092 2.34	19.00	SST	CG N
0.6	15.240	71863	3.75 95.250	0.404 10.262	61.00 10.675	1.100 27.940	69.000 306.912	1.900 48.26	0.098 2.49	19.40	MW	CG N
0.6	15.240	71863S	3.75 95.250	0.404 10.262	51.00 8.925	0.890 22.606	46.000 204.608	1.900 48.26	0.098 2.49	19.40	SST	CG N
0.6	15.240	71818	4.00 101.600	0.438 11.125	25.00 4.375	1.600 40.640	41.000 182.368	1.570 39.88	0.081 2.06	19.40	MW	CG N
0.6	15.240	71818S	4.00 101.600	0.438 11.125	22.00 3.850	1.294 32.868	29.000 128.992	1.680 42.67	0.082 2.08	21.00	SST	CG N
0.6	15.240	71834	4.00 101.600	0.430 10.922	31.00 5.425	1.500 38.100	48.000 213.504	1.690 42.93	0.085 2.16	19.90	MW	CG N
0.6	15.240	71834S	4.00 101.600	0.430 10.922	26.00 4.550	1.200 30.480	32.000 142.336	1.690 42.93	0.085 2.16	19.90	SST	CG N
0.6	15.240	71849	4.00 101.600	0.416 10.566	43.00 7.525	1.300 33.020	57.000 253.536	1.850 46.99	0.092 2.34	20.10	MW	CG N
0.6	15.240	71849S	4.00 101.600	0.416 10.566	37.00 6.475	1.000 25.400	38.000 169.024	1.850 46.99	0.092 2.34	20.10	SST	CG N
0.6	15.240	71864	4.00 101.600	0.404 10.262	57.00 9.975	1.200 30.480	69.000 306.912	2.010 51.05	0.098 2.49	20.50	MW	CG N
0.6	15.240	71864S	4.00 101.600	0.404 10.262	48.00 8.400	0.950 24.130	46.000 204.608	2.010 51.05	0.098 2.49	20.50	SST	CG N
0.609	15.469	2574	0.31 7.874	0.569 14.453	0.56 0.098	0.210 5.334	0.120 0.534	0.100 2.54	0.020 0.51	4.00	MW	C Z
0.609	15.469	AA-52	0.41 10.414	0.549 13.945	2.40 0.420	0.240 6.096	0.580 0.580	0.170 4.32	0.030 0.76	4.50	MW	C N
0.609	15.469	J-53	0.41 10.414	0.465 11.811	221.00 38.675	0.090 2.286	19.000 84.512	0.220 5.59	0.072 1.83	3.00	SST	CG N
0.609	15.469	NN-100	0.44 11.176	0.521 13.233	18.00 3.150	0.240 6.096	4.200 18.682	0.200 5.08	0.044 1.12	3.50	SST	C N
0.609	15.469	O-73	0.44 11.176	0.501 12.725	31.00 5.425	0.220 5.588	6.900 30.691	0.220 5.59	0.054 1.37	4.00	SST	CG N
0.609	15.469	I-100	0.44 11.176	0.409 10.389	109.00 190.750	0.050 1.270	52.000 231.296	0.300 7.62	0.100 2.54	3.00	SPR	CG Z
0.609	15.469	J-32	0.47 11.938	0.569 14.453	1.10 0.193	0.390 9.906	0.440 1.957	0.080 2.03	0.020 0.51	3.00	MW	C N
0.609	15.469	K-41	0.50 12.700	0.539 13.691	5.70 0.998	0.360 9.144	2.100 9.341	0.140 3.56	0.035 0.89	4.00	SPR	CG GI
0.609	15.469	WW-36	0.50 12.700	0.501 12.725	31.00 5.425	0.230 5.842	7.100 31.581	0.270 6.86	0.054 1.37	4.00	SST	C N
0.609	15.469	UU-65	0.50 12.700	0.489 12.421	113.00 19.775	0.110 2.794	13.000 57.824	0.180 4.57	0.060 1.52	3.00	SPR	CG Z
0.609	15.469	B15-26	0.56 14.224	0.509 12.929	26.00 4.550	0.290 7.366	7.400 32.915	0.200 5.08	0.050 1.27	4.00	SPR	CG Z
0.609	15.469	10758	0.56 14.224	0.507 12.878	28.00 4.900	0.280 7.112	7.900 35.139	0.260 6.60	0.051 1.30	4.00	SPR	C BO
0.609	15.469	B10-58	0.63 16.002	0.521 13.233	15.00 2.625	0.340 8.636	5.100 22.685	0.170 4.32	0.044 1.12	3.75	SST	CG N
0.609	15.469	QQ-60	0.63 16.002	0.475 12.065	73.00 12.775	0.240 6.096	18.000 80.064	0.300 7.62	0.067 1.70	4.50	SPR	CG Z
0.609	15.469	B17-120	0.63 16.002	0.385 9.779	80.000 140.175	0.080 2.032	63.000 280.224	0.450 11.43	0.112 2.84	4.00	SST	CG N
0.609	15.469	Q-56	0.66 16.764	0.503 12.776	12.00 2.100	0.290 7.366	3.300 14.678	0.370 9.40	0.053 1.35	7.00	SST	CG N
0.609	15.469	BB-98	0.69 17.526	0.545 13.843	1.60 0.280	0.460 11.684	0.730 3.247	0.220 5.59	0.032 0.81	7.00	SPR	CG N
0.609	15.469	10618	0.69 17.526	0.537 13.640	6.40 1.120	0.470 11.938	3.000 13.344	0.180 4.57	0.036 0.91	4.00	SPR	C Z
0.609	15.469	S-1108	0.69 17.526	0.489 12.421	24.00 4.200	0.330 8.382	8.000 35.584	0.360 9.14	0.060 1.52	6.00	SST	CG N
0.609	15.469	10009	0.69 17.526	0.469 11.913	73.00 12.775	0.260 6.604	19.000 84.512	0.350 8.89	0.070 1.78	5.00	SPR	CG Z
0.609	15.469	10953	0.72 18.288	0.523 13.284	6.80 1.190	0.420 10.668	2.800 12.454	0.300 7.62	0.043 1.09	6.00	SPR	C N
0.609	15.469	2780	0.75 19.050	0.539 13.691	3.30 0.578	0.520 13.208	1.700 7.562	0.230 5.84	0.035 0.89	5.50	HD	C Z
0.609	15.469	N-30	0.75 19.050	0.525 13.335	6.20 1.085	0.520 13.208	3.200 14.234	0.230 5.84	0.042 1.07	5.50	SST	CG N
0.609	15.469	PP-43	0.75 19.050	0.449 11.405	133.00 23.275	0.210 5.334	28.000 124.544	0.400 10.16	0.080 2.03	5.00	SPR	CG Z
0.609	15.469	12258	0.75 19.050	0.445 11.303	127.00 22.225	0.240 6.096	30.000 133.440	0.450 11.43	0.082 2.08	5.50	SPR	CG Z
0.609	15.469	2682	0.75 19.050	0.427 10.846	236.00 41.300	0.230 5.842	55.000 244.640	0.460 11.68	0.091 2.31	5.00	MW	CG Z
0.609	15.469	S-1690	0.80 20.320	0.469 11.913	64.00 11.200	0.280 7.112	18.000 80.064	0.350 8.89	0.070 1.78	5.00	SST	CG N
0.609	15.469	1769	0.81 20.574	0.549 13.945	2.40 0.420	0.650 16.510	1.600 7.117	0.170 4.32	0.030 0.76	4.50	HD	C Z
0.609	15.469	4146	0.81									




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh
0.609	15.469	10611	1.09	27.686	0.535	13.589	4.10	0.718	0.790	20.066	3,300	14.678
0.609	15.469	S-1564	1.11	28.194	0.449	11.405	53.00	9.275	0.430	10.922	23,000	102.304
0.609	15.469	S-259	1.13	28.702	0.545	13.843	1.40	0.245	0.870	22.098	1,200	5.338
0.609	15.469	3107	1.13	28.702	0.527	13.386	5.90	1.033	0.750	19.050	4,400	19.571
0.609	15.469	B-63	1.13	28.702	0.513	13.030	6.20	1.085	0.690	17.526	4,300	19.126
0.609	15.469	A12-21	1.13	28.702	0.507	12.878	16.00	2.800	0.680	17.272	11,000	48.928
0.609	15.469	S-1332	1.13	28.702	0.389	9.881	421.00	73.675	0.140	3.556	60,000	266.880
0.609	15.469	2803	1.16	29.464	0.533	13.538	1.80	0.315	0.700	17.780	1,300	5.782
0.609	15.469	NN-95	1.16	29.464	0.449	11.405	88.00	15.400	0.320	8.128	28,000	124.544
0.609	15.469	XX-57	1.19	30.226	0.549	13.945	1.50	0.263	0.990	25.146	1,500	6.672
0.609	15.469	A10-64	1.19	30.226	0.509	12.929	7.30	1.278	0.740	18.796	5,400	24.019
0.609	15.469	YY-39	1.19	30.226	0.465	11.811	42.00	7.350	0.500	12.700	21,000	93.408
0.609	15.469	N-77	1.22	30.988	0.485	12.319	28.00	4.900	0.479	12.167	13,400	59.603
0.609	15.469	11230	1.25	31.750	0.513	13.030	9.10	1.593	0.680	17.272	6,190	27.533
0.609	15.469	12508	1.25	31.750	0.513	13.030	8.60	1.505	0.820	20.828	7,100	31.581
0.609	15.469	11583	1.25	31.750	0.511	12.979	12.00	2.100	0.640	16.256	7,500	33.360
0.609	15.469	3833	1.25	31.750	0.475	12.065	24.00	4.200	0.550	13.970	13,000	57.824
0.609	15.469	3003	1.25	31.750	0.429	10.897	123.00	21.525	0.310	7.874	38,000	169.024
0.609	15.469	12134	1.25	31.750	0.339	8.611	815.00	142.625	0.140	3.556	113,000	502.624
0.609	15.469	B8-49	1.28	32.512	0.553	14.046	0.80	0.140	1.100	27.940	0.870	3.870
0.609	15.469	3537	1.28	32.512	0.399	10.135	271.00	47.425	0.220	5.588	59,000	262.432
0.609	15.469	3322	1.31	33.274	0.459	11.659	37.00	6.475	0.560	14.224	21,000	93.408
0.609	15.469	B8-44	1.38	35.052	0.469	11.913	44.00	7.700	0.430	10.922	19,000	84.512
0.609	15.469	RR-48	1.38	35.052	0.465	11.811	39.00	6.825	0.490	12.446	19,000	84.512
0.609	15.469	B14-64	1.44	36.576	0.501	12.725	14.00	2.450	0.650	16.510	9,300	41.366
0.609	15.469	S-1192	1.44	36.576	0.425	10.795	118.00	20.650	0.320	8.128	38,000	169.024
0.609	15.469	LL-92	1.50	38.100	0.527	13.386	3.90	0.683	1.100	27.940	4,400	19.571
0.609	15.469	S-1406	1.50	38.100	0.521	13.233	3.20	0.560	1.100	27.940	3,400	15.123
0.609	15.469	S-1311	1.50	38.100	0.501	12.725	11.00	1.925	0.780	19.812	8,800	39.142
0.609	15.469	S-938	1.50	38.100	0.501	12.725	9.60	1.680	0.920	23.368	8,800	39.142
0.609	15.469	11310	1.50	38.100	0.489	12.421	13.00	2.275	0.870	22.098	12,000	53.376
0.609	15.469	S-485	1.53	38.862	0.519	13.183	5.20	0.910	1.100	27.940	5,500	24.464
0.609	15.469	11653	1.53	38.862	0.449	11.405	33.00	5.775	0.410	10.414	14,000	62.272
0.609	15.469	YY-30	1.56	39.624	0.503	12.776	11.00	1.925	0.800	20.320	8,800	39.142
0.609	15.469	A15-67	1.56	39.624	0.403	10.236	147.00	25.725	0.380	9.652	56,000	249.088
0.609	15.469	S-1143	1.63	41.402	0.501	12.725	8.30	1.453	1.100	27.940	8,800	39.142
0.609	15.469	11511	1.63	41.402	0.467	11.862	29.00	5.075	0.680	17.272	20,000	88.960
0.609	15.469	10189	1.63	41.402	0.427	10.846	71.00	12.425	0.530	13.462	38,000	169.024
0.609	15.469	10846	1.63	41.402	0.369	9.373	323.00	56.525	0.240	6.096	77,000	342.496
0.609	15.469	B10-15	1.66	42.164	0.499	12.675	9.70	1.698	1.000	25.400	9,900	44.035
0.609	15.469	2537	1.69	42.926	0.513	13.030	3.90	0.683	1.100	27.940	4,200	18.682
0.609	15.469	S-885	1.69	42.926	0.365	9.271	355.00	62.125	0.216	5.486	77,000	342.496
0.609	15.469	11581	1.75	44.450	0.489	12.421	14.00	2.450	0.910	23.114	13,000	57.824
0.609	15.469	S-494	1.75	44.450	0.465	11.811	24.00	4.200	0.800	20.320	19,000	84.512
0.609	15.469	1517	1.75	44.450	0.413	10.490	114.00	19.950	0.430	10.922	49,000	217.952
0.609	15.469	JJ-78	1.81	45.974	0.545	13.843	0.98	0.172	1.500	38.100	1,400	6.227
0.609	15.469	12510	1.84	46.736	0.483	12.268	16.00	2.800	1.100	27.940	18,000	80.064
0.609	15.469	11886	1.84	46.736	0.445	11.303	49.00	8.575	0.610	15.494	30,000	133.440
0.609	15.469	11939	1.84	46.736	0.409	10.389	91.00	15.925	0.440	11.176	40,000	177.920
0.609	15.469	12256	1.88	47.752	0.419	10.643	108.00	18.900	0.410	10.414	44,000	195.712
0.609	15.469	S-24	2.00	50.800	0.519	13.183	3.60	0.630	1.500	38.100	5,400	24.019
0.609	15.469	S-277	2.00	50.800	0.439	11.151	57.00	9.975	0.550	13.970	31,000	137.888
0.609	15.469	10564	2.03	51.562	0.505	12.827	6.20	1.085	1.300	33.020	8,400	37.363
0.609	15.469	10961	2.13	54.102	0.561	14.249	0.50	0.088	1.900	48.260	0.970	4.315
0.609	15.469	11689	2.25	57.150	0.501	12.725	7.90	1.383	1.200	30.480	9,300	41.366
0.609	15.469	11487	2.25	57.150	0.399	10.135	105.00	18.375	0.570	14.478	59,000	262.432
0.609	15.469	10501	2.28	57.912	0.463	11.760	27.00	4.725	0.810	20.574	22,000	97.856
0.609	15.469	S-74	2.38	60.452	0.339	8.611	487.00	85.225	0.210	5.334	102,000	453.696
0.609	15.469	S-3255	2.41	61.214	0.519	13.183	3.90	0.683	1.400	35.560	5,500	24.464
0.609	15.469	10711	2.41	61.214	0.373	9.474	235.00	41.125	0.340	8.636	80,000	355.840
0.609	15.469	VV-56	2.50	63.500	0.525	13.335	1.90	0.333	1.900	48.260	3,700	16.458
0.609	15.469	11622	2.50	63.500	0.519	13.183	3.30	0.578	1.800	45.720	5,800	25.798
0.609	15.469	B2-63	2.50	63.500	0.485	12.319	12.00	2.100	1.600	40.640	19,000	84.512
0.609	15.469	11249	2.50	63.500	0.413	10.490	71.00	12.425	0.690	17.526	49,000	217.952
0.609	15.469	11657	2.53	64.262	0.399	10.135	171.00	29.925	0.350	8.890	59,000	262.432
0.609	15.469	11958	2.59	65.786	0.531	13.487	1.00	0.175	1.800	45.720	1,800	8.006
0.609	15.469	11790	2.59	65.786	0.461	11.709	28.00	4.900	0.800	20.320	22,000	97.856
0.609	15.469	WW-50	2.75	69.850	0.529	13.437	2.20	0.385	1.800	45.720	3,900	17.347
0.609	15.469	4105	2.75	69.850	0.527	13.386	1.80	0.315	2,100	53.340	3,900	17.347
0.609	15.469	2867	2.75	69.850	0.471	11.963	16.00	2.800	1.700	43.180	27,000	120.096
0.609	15.469	11840	2.78	70.612	0.467	11.862	21.00	3.675	0.930	23.622	20,000	88.960
0.609	15.469	12142	2.88	73.152	0.525	13.335	1.10	0.193	1.800	45.720	1,900	8.451
0.609	15.469	3660	3.25	82.550	0.525	13.335	2.50	0.438	1,900	48.260	4,800	21.350
0.609	15.469	10769	3.25	82.550	0.485	12.319	11.00	1.925	1,300	33.020	14,000	62.272
0.609	15.469	11556	3.38	85.852	0.559	14.199	0.28	0.049	3,100	78.740	0.860	3.825
0.609	15.469	2710	3.50	88.900	0.513	13.030	2.70	0.473	2,600	66.040	7,000	31.136
0.609	15.469	S-215	3.50	88.900	0.485	12.319	7.10	1.243	1,887	47.930	13,400	59.603
0.609	15											




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
0.609	15.469	3311	4.13 104.902	0.399 10.135	80.00 14.000	0.740 18.796	59.000 262.432	2.100 53.34	0.105 2.67	19.00	SPR CG	Z
0.609	15.469	S-61	4.38 111.252	0.439 11.151	15.00 2.625	1.600 40.640	24.000 106.752	2.760 70.10	0.085 2.16	32.50	SST CG	N
0.609	15.469	2796	4.50 114.300	0.415 10.541	36.00 6.300	1.800 45.720	65.000 289.120	2.720 69.09	0.097 2.46	28.00	MW CG	Z
0.609	15.469	3162	4.50 114.300	0.415 10.541	40.00 7.000	1.200 30.480	47.000 209.056	2.520 64.01	0.097 2.46	26.00	SPR CG	Z
0.609	15.469	11585	4.53 115.062	0.421 10.693	34.00 5.950	1.300 33.020	43.000 191.264	2.540 64.52	0.094 2.39	26.00	SPR CG	N
0.609	15.469	1811	4.88 123.952	0.427 10.846	28.00 4.900	2.000 50.800	55.000 244.640	2.620 66.55	0.091 2.31	27.80	MW C	Z
0.609	15.469	3805	5.00 127.000	0.485 12.319	4.30 0.753	3.000 76.200	13.000 57.824	2.050 52.07	0.062 1.57	32.00	HD C	Z
0.609	15.469	12323	7.34 186.436	0.467 11.862	4.60 0.805	3.600 91.440	16.000 71.168	3.760 95.50	0.071 1.80	53.00	SPR CG	Z
0.609	15.469	S-228	8.50 215.900	0.497 12.624	1.70 0.298	5.800 147.320	9.800 43.590	2.580 65.53	0.056 1.42	45.00	SST C	N
0.625	15.875	S-175	0.28 7.112	0.501 12.725	106.00 18.550	0.092 2.337	9.700 43.146	0.188 4.78	0.063 1.59	3.00	SST CG	N
0.625	15.875	S-391	0.38 9.652	0.567 14.402	3.30 0.578	0.250 6.350	0.840 3.736	0.120 3.05	0.029 0.74	3.25	SST C	N
0.625	15.875	H-24	0.41 10.414	0.515 13.081	62.00 10.850	0.150 3.810	9.000 40.032	0.170 4.32	0.055 1.40	3.00	SST CG	N
0.625	15.875	K-31	0.44 11.176	0.529 13.437	12.00 2.100	0.221 5.613	2.700 12.010	0.219 5.56	0.048 1.21	4.50	SST CG	N
0.625	15.875	PP-47	0.44 11.176	0.465 11.811	364.00 63.700	0.080 2.032	27.000 120.096	0.240 6.10	0.080 2.03	3.00	SPR CG	Z
0.625	15.875	3506	0.53 13.462	0.569 14.453	4.20 0.735	0.420 10.668	1.700 7.562	0.110 2.79	0.028 0.71	3.00	MW C	Z
0.625	15.875	2511	0.53 13.462	0.517 13.132	33.00 5.775	0.260 6.604	8.600 38.253	0.270 6.86	0.054 1.37	4.00	HD C	GI
0.625	15.875	11369	0.59 14.986	0.571 14.503	0.67 0.117	0.380 9.652	0.260 1.156	0.210 5.33	0.027 0.69	6.75	SST C	N
0.625	15.875	4320	0.63 16.002	0.563 14.300	4.20 0.735	0.490 12.446	2.100 9.341	0.140 3.56	0.031 0.79	3.50	MW C	Z
0.625	15.875	10123	0.63 16.002	0.497 12.624	39.00 6.825	0.270 6.858	11.000 48.928	0.350 8.89	0.064 1.63	5.50	SPR CG	Z
0.625	15.875	B9-39	0.66 16.764	0.521 13.233	19.00 3.325	0.400 10.160	7.400 32.915	0.260 6.60	0.052 1.32	5.00	SPR CG	N
0.625	15.875	XX-56	0.69 17.526	0.545 13.843	8.00 1.400	0.470 11.938	3.800 16.902	0.200 5.08	0.040 1.02	4.00	SST C	N
0.625	15.875	A9-66	0.72 18.288	0.561 14.249	2.30 0.403	0.570 14.478	1.300 5.782	0.150 3.81	0.032 0.81	4.75	SST CG	N
0.625	15.875	522	0.75 19.050	0.543 13.792	10.00 1.750	0.420 10.668	4.300 19.126	0.210 5.33	0.041 1.04	4.00	HD C	Z
0.625	15.875	918	0.75 19.050	0.543 13.792	6.80 1.190	0.500 12.700	3.400 15.123	0.250 6.35	0.041 1.04	5.00	HD C	Z
0.625	15.875	CC-24	0.75 19.050	0.525 13.335	16.00 2.800	0.460 11.684	7.300 32.470	0.250 6.35	0.050 1.27	5.00	SPR CG	Z
0.625	15.875	S-766	0.75 19.050	0.515 13.081	27.00 4.725	0.330 8.382	9.000 40.032	0.290 7.37	0.055 1.40	4.25	SST C	N
0.625	15.875	S-286	0.75 19.050	0.481 12.217	50.00 8.750	0.320 8.128	16.000 71.168	0.430 10.92	0.072 1.83	6.00	SST CG	N
0.625	15.875	10279	0.75 19.050	0.465 11.811	182.00 31.850	0.150 3.810	27.000 120.096	0.320 8.13	0.080 2.03	4.00	SPR CG	Z
0.625	15.875	4205	0.75 19.050	0.415 10.541	414.00 72.450	0.140 3.556	58.000 257.984	0.530 13.46	0.105 2.67	5.00	SPR CG	Z
0.625	15.875	S-58	0.78 19.812	0.501 12.725	69.00 12.075	0.190 4.826	13.100 58.269	0.222 5.64	0.063 1.59	3.60	SST CG	N
0.625	15.875	K-59	0.78 19.812	0.445 11.303	154.00 26.950	0.240 6.096	37.000 164.576	0.540 13.72	0.090 2.29	6.00	SPR CG	N
0.625	15.875	A11-43	0.81 20.574	0.519 13.183	23.00 4.025	0.350 8.890	8.100 36.029	0.230 5.84	0.053 1.35	4.33	SST CG	N
0.625	15.875	S-826	0.81 20.574	0.425 10.795	247.00 43.225	0.190 4.826	47.000 209.056	0.550 13.97	0.100 2.54	5.50	SST CG	N
0.625	15.875	10888	0.84 21.336	0.589 14.961	0.17 0.030	0.730 18.542	0.120 0.534	0.120 3.05	0.018 0.46	5.50	SST C	N
0.625	15.875	S-68	0.88 22.352	0.549 13.945	4.70 0.823	0.690 17.526	3.200 14.234	0.180 4.57	0.038 0.97	4.75	SST CG	N
0.625	15.875	2831	0.88 22.352	0.531 13.487	7.30 1.278	0.500 12.700	3.600 16.013	0.380 9.65	0.047 1.19	7.00	HD C	Z
0.625	15.875	B12-58	0.88 22.352	0.515 13.081	14.00 2.450	0.490 12.446	7.000 31.136	0.390 9.91	0.055 1.40	7.00	SPR CG	Z
0.625	15.875	3911	0.88 22.352	0.501 12.725	30.00 5.250	0.460 11.684	14.000 62.272	0.370 9.40	0.062 1.57	6.00	HD CG	Z
0.625	15.875	3192	0.88 22.352	0.439 11.151	238.00 41.650	0.170 4.318	41.000 182.368	0.470 11.94	0.093 2.36	5.00	SPR CG	Z
0.625	15.875	10982	0.88 22.352	0.431 10.947	219.00 38.325	0.200 5.080	43.000 191.264	0.530 13.46	0.097 2.46	5.50	SST CG	N
0.625	15.875	A9-69	0.91 23.114	0.543 13.792	7.40 1.295	0.580 14.732	4.300 19.126	0.190 4.83	0.041 1.04	4.75	SPR CG	Z
0.625	15.875	W-30	0.94 23.876	0.551 13.995	1.50 0.263	0.490 12.446	0.730 3.247	0.440 11.18	0.037 0.94	11.00	SPR C	Z
0.625	15.875	AA-75	0.94 23.876	0.505 12.827	28.00 4.900	0.450 11.430	12.000 53.376	0.350 8.89	0.060 1.52	5.75	SPR CG	N
0.625	15.875	3129	0.97 24.638	0.563 14.300	2.10 0.368	0.780 19.812	1.700 7.562	0.190 4.83	0.031 0.79	5.00	MW C	Z
0.625	15.875	3031	1.00 25.400	0.539 13.691	5.50 0.963	0.680 17.272	3.800 16.902	0.320 8.13	0.043 1.09	6.50	SPR C	Z
0.625	15.875	2799	1.00 25.400	0.533 13.538	13.00 2.275	0.460 11.684	6.100 27.133	0.210 5.33	0.046 1.17	4.50	SPR CG	GI
0.625	15.875	B11-59	1.00 25.400	0.529 13.437	11.00 1.925	0.610 15.494	6.900 30.691	0.260 6.60	0.048 1.22	5.50	SPR CG	N
0.625	15.875	11456	1.00 25.400	0.521 13.233	14.00 2.450	0.580 14.732	8.100 36.029	0.360 9.14	0.052 1.32	6.00	SPR C	Z
0.625	15.875	N-53	1.00 25.400	0.517 13.132	13.00 2.275	0.620 15.748	8.200 36.474	0.380 9.65	0.054 1.37	7.00	SPR CG	GI
0.625	15.875	S-767	1.00 25.400	0.515 13.081	19.00 3.325	0.480 12.192	9.000 40.032	0.340 8.64	0.055 1.40	5.25	SST C	N
0.625	15.875	12121	1.00 25.400	0.509 12.929	11.00 1.925	0.360 9.144	4.000 17.792	0.640 16.26	0.058 1.47	10.00	SPR C	Z
0.625	15.875	S-770	1.00 25.400	0.499 12.675	32.00 5.600	0.409 10.389	13.100 58.269	0.397 10.08	0.063 1.59	5.30	SST C	N
0.625	15.875	EE-40	1.00 25.400	0.485 12.319	50.00 8.750	0.370 9.398	19.000 84.512	0.420 10.67	0.070 1.78	6.00	SPR CG	N
0.625	15.875	S-367	1.00 25.400	0.481 12.217	50.00 8.750	0.380 9.652	19.000 84.512	0.430 10.92	0.072 1.83	6.00	SST CG	N
0.625	15.875	944	1.00 25.400	0.465 11.811	121.00 21.175	0.230 5.842	27.000 120.096	0.480 12.19	0.080 2.03	5.00	HD C	Z
0.625	15.875	2745	1.00 25.400	0.455 11.557	159.00 27.825	0.290 7.366	46.000 204.608	0.430 10.92	0.085 2.16	5.00	MW CG	Z
0.625	15.875	BB-88	1.06 26.924	0.547 13.894	3.30 0.578	0.790 20.066	2.600 11.565	0.270 6.86	0.039 0.99	7.00	SPR CG	Z
0.625	15.875	L-64	1.06 26.924	0.491 12.471	28.00 4.900	0.530 13.462	15.000 66.720	0.540 13.72	0.067 1.70	8.00	SPR CG	N
0.625	15.875	12289	1.06 26.924	0.435 11.049	157.00 27.475	0.280 7.112	43.000 191.264	0.670 17.02	0.095 2.41	7.00	SPR CG	GI
0.625	15.875	3856	1.06 26.924	0.371 9.423	757.00 132.475	0.130 3.302	96.000 427.008	0.760 19.30	0.127 3.23	6.00	SPR CG	Z
0.625	15.875	12469	1.09 27.686	0.495 12.573	27.00 4.725	0.590 14.986	16.000 71.168	0.490 12.45	0.065 1.65	7.50	SPR CG	Z
0.625	15.875	10747	1.09 27.686	0.415 10.541	220.00 38.500	0.240 6.096	54.000 240.192	0.740 18.80	0.105 2.67	7.00	SST CG	N
0.625	15.875	4317	1.13 28.702	0.575 14.605	0.58 0.102	0.940 23.876	0.540 2.402	0.190 4.83	0.025 0.64	6		




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h								
0.625	15.875	1915	1.25	31.750	0.511	12.979	19.00	3.325	0.550	13.970	11.000	48.928	0.410	10.41	0.057	1.45	6.25	SPR	C	Z
0.625	15.875	1909	1.25	31.750	0.501	12.725	24.00	4.200	0.580	14.732	14.000	62.272	0.430	10.92	0.062	1.57	7.00	SPR	CG	Z
0.625	15.875	S-771	1.25	31.750	0.499	12.675	23.00	4.025	0.569	14.453	13.100	58.269	0.479	12.17	0.063	1.59	6.70	SST	C	N
0.625	15.875	10121	1.25	31.750	0.497	12.624	27.00	4.725	0.550	13.970	15.000	66.720	0.510	12.95	0.064	1.63	7.00	HD	C	Z
0.625	15.875	12768	1.25	31.750	0.475	12.065	61.00	10.675	0.520	13.208	32.000	142.336	0.560	14.22	0.075	1.91	6.50	MW	C	Z
0.625	15.875	10620	1.25	31.750	0.443	11.252	118.00	20.650	0.330	8.382	38.000	169.024	0.680	17.27	0.091	2.31	7.50	SPR	CG	Z
0.625	15.875	3137	1.25	31.750	0.431	10.947	173.00	30.275	0.270	6.858	46.000	204.608	0.680	17.27	0.097	2.46	7.00	SPR	CG	Z
0.625	15.875	A10-41	1.25	31.750	0.349	8.865	860.00	150.500	0.140	3.556	118.000	524.864	1.000	25.40	0.138	3.51	7.25	SPR	CG	Z
0.625	15.875	B6-14	1.28	32.512	0.487	12.370	38.00	6.650	0.490	12.446	19.000	84.512	0.480	12.19	0.069	1.75	7.00	SPR	CG	N
0.625	15.875	B11-64	1.31	33.274	0.501	12.725	40.00	7.000	0.350	8.890	14.000	62.272	0.310	7.87	0.062	1.57	5.00	SPR	CG	N
0.625	15.875	11838	1.34	34.036	0.517	13.132	11.00	1.925	0.830	21.082	9.100	40.477	0.430	10.92	0.054	1.37	8.00	SPR	CG	Z
0.625	15.875	10632	1.38	35.052	0.481	12.217	29.00	5.075	0.670	17.018	20.000	88.960	0.700	17.78	0.072	1.83	9.75	SPR	CG	Z
0.625	15.875	3818	1.38	35.052	0.431	10.947	133.00	23.275	0.350	8.890	46.000	204.608	0.820	20.83	0.097	2.46	8.50	SPR	CG	Z
0.625	15.875	G-41	1.38	35.052	0.415	10.541	178.00	31.150	0.330	8.382	58.000	257.984	0.950	24.13	0.105	2.67	9.00	SPR	CG	N
0.625	15.875	3879	1.44	36.576	0.551	13.995	1.50	0.263	0.990	25.146	1.500	6.672	0.440	11.18	0.037	0.94	11.00	SPR	C	Z
0.625	15.875	S-1225	1.44	36.576	0.455	11.557	64.00	11.200	0.480	12.192	31.000	137.888	0.720	18.29	0.085	2.16	8.50	SST	CG	N
0.625	15.875	10452	1.47	37.338	0.477	12.116	32.00	5.600	0.680	17.272	22.000	97.856	0.740	18.80	0.074	1.88	10.00	SPR	CG	Z
0.625	15.875	11473	1.50	38.100	0.555	14.097	1.40	0.245	1.100	27.940	1.700	7.562	0.360	9.14	0.035	0.89	9.25	MW	C	Z
0.625	15.875	523	1.50	38.100	0.543	13.792	3.40	0.595	1.100	27.940	3.800	16.902	0.370	9.40	0.041	1.04	8.00	HD	C	Z
0.625	15.875	S-1186	1.50	38.100	0.531	13.487	5.30	0.928	1.100	27.940	5.700	25.354	0.420	10.67	0.047	1.19	8.00	SST	C	N
0.625	15.875	4213	1.50	38.100	0.529	13.437	6.90	1.208	1.000	25.400	6.900	30.691	0.420	10.67	0.048	1.22	7.75	SPR	C	Z
0.625	15.875	S-769	1.50	38.100	0.515	13.081	12.00	2.100	0.770	19.558	9.000	40.032	0.450	11.43	0.055	1.40	7.25	SST	C	N
0.625	15.875	S-772	1.50	38.100	0.499	12.675	19.00	3.325	0.688	17.475	13.100	58.269	0.540	13.72	0.063	1.59	7.60	SST	C	N
0.625	15.875	S-773	1.50	38.100	0.481	12.217	32.00	5.600	0.590	14.986	19.000	84.512	0.670	17.02	0.072	1.83	8.25	SST	C	N
0.625	15.875	XX-58	1.50	38.100	0.481	12.217	28.00	4.900	0.670	17.018	19.000	84.512	0.650	16.51	0.072	1.83	9.00	SST	CG	N
0.625	15.875	11304	1.50	38.100	0.451	11.455	82.00	14.350	0.400	10.160	33.000	146.784	0.760	19.30	0.087	2.21	7.75	SST	CG	N
0.625	15.875	11445	1.50	38.100	0.435	11.049	157.00	27.475	0.390	9.906	61.000	271.328	0.670	17.02	0.095	2.41	7.00	MW	CG	Z
0.625	15.875	3917	1.63	41.402	0.529	13.437	3.60	0.630	0.950	24.130	3.400	15.123	0.670	17.02	0.048	1.22	13.00	HD	C	Z
0.625	15.875	3252	1.63	41.402	0.465	11.811	40.00	7.000	0.680	17.272	27.000	120.096	0.880	22.35	0.080	2.03	11.00	HD	CG	Z
0.625	15.875	11688	1.69	42.926	0.531	13.487	3.50	0.613	1.100	27.940	3.800	16.902	0.590	14.99	0.047	1.19	12.50	SPR	CG	Z
0.625	15.875	4128	1.69	42.926	0.445	11.303	103.00	18.025	0.360	9.144	37.000	164.576	0.810	20.57	0.090	2.29	8.00	SPR	C	Z
0.625	15.875	3887	1.69	42.926	0.355	9.017	541.00	94.675	0.210	5.334	111.000	493.728	1.280	32.51	0.135	3.43	9.50	SPR	CG	Z
0.625	15.875	4125	1.75	44.450	0.481	12.217	33.00	5.775	0.620	15.748	20.000	88.960	0.720	18.29	0.072	1.83	9.00	SPR	C	Z
0.625	15.875	S-774	1.75	44.450	0.481	12.217	26.00	4.550	0.710	18.034	19.000	84.512	0.760	19.30	0.072	1.83	9.50	SST	C	N
0.625	15.875	882	1.75	44.450	0.443	11.252	72.00	12.600	0.530	13.462	38.000	169.024	1.090	27.69	0.091	2.31	11.00	HD	C	Z
0.625	15.875	S-3259	1.78	45.212	0.565	14.351	1.20	0.210	1.400	35.560	1.700	7.562	0.180	4.57	0.030	0.76	6.00	SST	CG	N
0.625	15.875	S-1568	1.81	45.974	0.497	12.624	15.00	2.625	0.930	23.622	14.000	62.272	0.640	16.26	0.064	1.63	10.00	SST	CG	N
0.625	15.875	11124	1.81	45.974	0.443	11.252	66.00	11.550	0.580	14.732	38.000	169.024	1.160	29.46	0.091	2.31	11.80	HD	C	Z
0.625	15.875	3209	1.84	46.736	0.443	11.252	65.00	11.375	0.590	14.986	38.000	169.024	1.090	27.69	0.091	2.31	12.00	SPR	CG	Z
0.625	15.875	4295	1.88	47.752	0.531	13.487	8.10	1.418	0.800	20.320	6.500	28.912	0.310	7.87	0.047	1.19	6.50	SPR	CG	Z
0.625	15.875	B32-32	1.91	48.514	0.483	12.268	19.00	3.325	0.950	24.130	18.000	80.064	0.850	21.59	0.071	1.80	12.00	SST	CG	N
0.625	15.875	11852	2.00	50.800	0.567	14.402	0.87	0.152	1.800	45.720	1.600	7.117	0.220	5.59	0.029	0.74	7.50	MW	CG	N
0.625	15.875	S-775	2.00	50.800	0.481	12.217	23.00	4.025	0.830	21.082	19.000	84.512	0.850	21.59	0.072	1.83	10.80	SST	C	N
0.625	15.875	B8-28	2.00	50.800	0.475	12.065	29.00	5.075	0.790	20.066	23.000	102.304	0.860	21.84	0.075	1.91	11.50	SPR	CG	N
0.625	15.875	12272	2.09	53.086	0.501	12.725	13.00	2.275	1.000	25.400	14.000	62.272	0.680	17.27	0.062	1.57	11.00	SPR	CG	Z
0.625	15.875	11767	2.09	53.086	0.465	11.811	33.00	5.775	0.830	21.082	27.000	120.096	1.040	26.42	0.080	2.03	13.00	SPR	CG	Z
0.625	15.875	11295	2.19	55.626	0.459	11.659	37.00	6.475	0.820	20.828	31.000	137.888	1.120	28.45	0.083	2.11	13.50	SPR	CG	Z
0.625	15.875	B18-153	2.22	56.388	0.425	10.795	81.00	14.175	0.620	15.748	50.000	222.400	1.430	36.32	1.00	2.54	14.30	SPR	CG	Z
0.625	15.875	S-1470	2.25	57.150	0.559	14.199	1.40	0.245	1.500	38.100	2.200	9.786	0.230	5.84	0.033	0.84	7.00	SST	CG	N
0.625	15.875	4260	2.25	57.150	0.501	12.725	13.00	2.275	1.000	25.400	14.000	62.272	0.740	18.80	0.062	1.57	11.00	SPR	C	Z
0.625	15.875	916	2.25	57.150	0.415	10.541	113.00	19.775	0.510	12.954	58.000	257.984	1.370	34.80	0.105	2.67	13.00	SPR	CG	Z
0.625	15.875	11438	2.25	57.150	0.401	10.185	134.00	23.450	0.500	12.700	68.000	302.464	1.620	41.15	0.112	2.84	14.50	SPR	CG	Z
0.625	15.875	S-809	2.31</																	




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h						
0.625	15.875	2528	3.19	81.026	0.461	11.709	29.00	5.075	1.400	35.560	41.000	182.368	1.310	33.27	0.082	2.08	16.00	MW CG Z
0.625	15.875	S-3132	3.25	82.550	0.415	10.541	64.00	11.200	0.850	21.590	54.000	240.192	2.000	50.80	0.105	2.67	19.00	SST CG N
0.625	15.875	2596	3.50	88.900	0.573	14.554	0.31	0.054	3.200	81.280	0.970	4.315	0.340	8.64	0.026	0.66	12.00	MW C Z
0.625	15.875	4156	3.50	88.900	0.531	13.487	3.80	0.665	1.700	43.180	6.500	28.912	0.590	14.99	0.047	1.19	11.50	HD C GI
0.625	15.875	2820	3.50	88.900	0.399	10.135	97.00	16.975	1.000	25.400	97.000	431.456	2.260	57.40	0.113	2.87	20.00	MW CG Z
0.625	15.875	12107	3.50	88.900	0.389	9.881	122.00	21.350	0.640	16.256	78.000	346.944	2.300	58.42	0.118	3.00	19.50	SPR CG Z
0.625	15.875	S-1037	3.75	95.250	0.375	9.525	122.00	21.350	0.690	17.526	84.000	373.632	2.750	69.85	0.125	3.18	22.00	SST CG N
0.625	15.875	12314	4.00	101.600	0.515	13.081	5.90	1.033	1.600	40.640	9.600	42.701	0.830	21.08	0.055	1.40	14.00	HD C Z
0.625	15.875	S-364	4.19	106.426	0.465	11.811	18.00	3.150	1.500	38.100	26.000	115.648	1.600	40.64	0.080	2.03	20.00	SST CG N
0.625	15.875	S-419	4.50	114.300	0.449	11.405	16.00	2.800	1.600	40.640	26.000	115.648	2.860	72.64	0.088	2.24	32.50	SST CG N
0.625	15.875	925	4.50	114.300	0.415	10.541	65.00	11.375	0.890	22.606	58.000	257.984	2.310	58.67	0.105	2.67	21.00	HD C Z
0.625	15.875	1899	4.81	122.174	0.449	11.405	24.00	4.200	2.100	53.340	51.000	226.848	2.180	55.37	0.088	2.24	24.80	MW CG Z
0.625	15.875	12419	4.84	122.936	0.443	11.252	27.00	4.725	1.400	35.560	38.000	169.024	2.370	60.20	0.091	2.31	26.00	SPR CG N
0.625	15.875	874	5.00	127.000	0.443	11.252	24.00	4.200	1.600	40.640	38.000	169.024	2.640	67.06	0.091	2.31	29.00	HD CG Z
0.625	15.875	3803	5.00	127.000	0.441	11.201	25.00	4.375	1.600	40.640	40.000	177.920	2.760	70.10	0.092	2.34	29.00	SPR CG Z
0.625	15.875	870	5.00	127.000	0.415	10.541	41.00	7.175	1.400	35.560	58.000	257.984	3.430	87.12	0.105	2.67	32.70	HD CG Z
0.625	15.875	1657	6.00	152.400	0.517	13.132	2.80	0.490	3.200	81.280	9.100	40.477	1.420	36.07	0.054	1.37	25.30	SPR C Z
0.625	15.875	3334	6.00	152.400	0.481	12.217	5.80	1.015	3.000	76.200	17.000	75.616	2.990	75.95	0.072	1.83	41.50	HD CG GI
0.625	15.875	1944	7.00	177.800	0.455	11.557	15.00	2.625	2.200	55.880	33.000	146.784	2.980	75.69	0.085	2.16	34.00	SPR C Z
0.625	15.875	888	9.00	228.600	0.465	11.811	8.40	1.470	3.300	83.820	27.000	120.096	3.720	94.49	0.080	2.03	45.50	HD C Z
0.625	15.875	10542	9.50	241.300	0.477	12.116	6.10	1.068	3.600	91.440	22.000	97.856	3.330	84.58	0.074	1.88	44.00	SPR C Z
0.625	15.875	10150	9.75	247.650	0.443	11.252	15.00	2.625	2.600	66.040	38.000	169.024	4.320	109.73	0.091	2.31	46.50	SPR C Z
0.625	15.875	4143	11.90	302.260	0.481	12.217	4.00	0.700	5.000	127.000	20.000	88.960	4.320	109.73	0.072	1.83	59.00	HD C Z
0.625	15.875	881	12.00	304.800	0.501	12.725	2.10	0.368	6.700	170.180	14.000	62.272	3.780	96.01	0.062	1.57	60.00	HD C Z
0.625	15.875	878	12.00	304.800	0.481	12.217	3.50	0.613	5.700	144.780	20.000	88.960	4.860	123.44	0.072	1.83	66.00	HD C Z
0.625	15.875	876	12.00	304.800	0.465	11.811	6.20	1.085	4.400	111.760	27.000	120.096	4.920	124.97	0.080	2.03	60.00	HD C Z
0.625	15.875	S-3045	15.00	381.000	0.491	12.471	1.90	0.333	8.400	213.360	16.000	71.168	5.190	131.83	0.067	1.70	77.00	SST CG N
0.64	16.256	S-105	0.34	8.636	0.582	14.783	3.10	0.543	0.220	5.588	0.680	3.025	0.120	3.05	0.029	0.74	3.25	SST C N
0.64	16.256	B10-13	0.38	9.652	0.508	12.903	57.00	9.975	0.090	2.286	5.400	24.019	0.280	7.11	0.066	1.68	4.25	SST CG N
0.64	16.256	S-1187	0.41	10.414	0.506	12.852	134.00	23.450	0.120	3.048	16.000	71.168	0.200	5.08	0.067	1.70	3.00	SST CG N
0.64	16.256	3181	0.44	11.176	0.512	13.005	126.00	22.050	0.120	3.048	15.000	66.720	0.190	4.83	0.064	1.63	3.00	SPR CG GI
0.64	16.256	10124	0.50	12.700	0.516	13.106	55.00	9.625	0.190	4.826	10.000	44.480	0.310	7.87	0.062	1.57	4.00	HD C Z
0.64	16.256	B15-27	0.50	12.700	0.500	12.700	110.00	19.250	0.150	3.810	17.000	75.616	0.250	6.35	0.070	1.78	3.50	SST CG N
0.64	16.256	3248	0.63	16.002	0.564	14.326	9.20	1.610	0.370	9.398	3.400	15.123	0.170	4.32	0.038	0.97	3.50	SPR C Z
0.64	16.256	S-1106	0.63	16.002	0.560	14.224	3.70	0.648	0.350	8.890	1.300	5.782	0.280	7.11	0.040	1.02	6.00	SST C N
0.64	16.256	3221	0.69	17.526	0.518	13.157	51.00	8.925	0.250	6.350	13.000	57.824	0.240	6.10	0.061	1.55	4.00	SPR CG GI
0.64	16.256	10595	0.69	17.526	0.430	10.922	368.00	64.400	0.140	3.556	53.000	235.744	0.500	12.70	0.105	2.67	4.75	SST CG N
0.64	16.256	S-889	0.75	19.050	0.542	13.767	9.20	1.610	0.460	11.684	4.200	18.682	0.290	7.37	0.049	1.24	6.00	SST CG N
0.64	16.256	KK-30	0.75	19.050	0.540	13.716	22.00	3.850	0.320	8.128	7.100	31.581	0.200	5.08	0.050	1.27	4.00	SPR CG Z
0.64	16.256	S-1428	0.75	19.050	0.430	10.922	397.00	69.475	0.130	3.302	53.000	235.744	0.470	11.94	0.105	2.67	4.50	SST CG N
0.64	16.256	10134	0.88	22.352	0.512	13.005	42.00	7.350	0.350	8.890	15.000	66.720	0.320	8.13	0.064	1.63	5.00	SPR CG Z
0.64	16.256	10789	0.88	22.352	0.470	11.938	111.00	19.425	0.270	6.858	30.000	133.440	0.470	11.94	0.085	2.16	5.50	SST CG N
0.64	16.256	GG-94	0.94	23.876	0.532	13.513	13.00	2.275	0.610	15.494	8.100	36.029	0.320	8.13	0.054	1.37	6.00	SST CG N
0.64	16.256	MM-52	0.94	23.876	0.520	13.208	32.00	5.600	0.380	9.652	12.000	53.376	0.300	7.62	0.060	1.52	5.00	SPR CG Z
0.64	16.256	S-3197	0.94	23.876	0.468	11.887	117.00	20.475	0.270	6.858	31.000	137.888	0.470	11.94	0.086	2.18	5.50	SST CG N
0.64	16.256	10787	0.97	24.638	0.470	11.938	110.00	19.250	0.290	7.366	32.000	142.336	0.510	12.95	0.085	2.16	6.00	SPR CG N
0.64	16.256	UU-53	1.00	25.400	0.550	13.970	7.00	1.225	0.690	17.526	4.800	21.350	0.320	8.13	0.045	1.14	6.00	SPR C Z
0.64	16.256	3144	1.00	25.400	0.546	13.868	5.20	0.910	0.550	13.970	2.900	12.899	0.450	11.43	0.047	1.19	8.50	SPR C Z
0.64	16.256	H-30	1.00	25.400	0.528	13.411	18.00	3.150	0.560	14.224	9.900	44.035	0.340	8.64	0.056	1.42	6.00	SPR CG Z
0.64	16.256	2763	1.00	25.400	0.474	12.040	175.00	30.625	0.240	6.096	42.000	186.816	0.440	11.18	0.083	2.11	4.25	MW C Z
0.64	16.256	S-1571	1.00	25.400	0.468	11.887	126.00	22.050	0.250	6.350	31.000	137.888	0.450	11.43	0.086	2.18	5.25	SST CG N
0.64	16.256	A15-35	1.03	26.162	0.548	13.919	11.00	1.925	0.510	12.954	5.600	24.909	0.210	5.33	0.046	1.17	4.50	SST CG N
0.64	16.256	2669	1.13	28.702	0.396	10.058	688.00	120.400	0.120	3.048	84.000	373.632	0.770	19.56	0.122	3.10	5.33	SPR C Z
0.64	16.256	B7-58	1.16	29.464	0.558	14.173	6.90	1.208	0.610	15.494	4.200	18.682	0.240	6.10	0.041	1.04	4.75	SPR C N
0.64	16.256	11901	1.16	29.464	0.552	14.021	7.80	1.365	0.660	16.764	5.200	23.130	0.230					




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh
0.64	16.256	A15-65	2.00 50.800	0.558 14.173	2.10 0.368	1.600 40.640	3.300 14.678	0.410 10.41	0.041 1.04	10.00	SST	CG N
0.64	16.256	10335	2.00 50.800	0.546 13.868	3.20 0.560	1.400 35.560	4.500 20.016	0.590 14.99	0.047 1.19	12.50	SPR	CG Z
0.64	16.256	11750	2.00 50.800	0.516 13.106	12.00 2.100	1.100 27.940	13.000 57.824	0.680 17.27	0.062 1.57	11.00	SPR	CG C
0.64	16.256	12580	2.00 50.800	0.480 12.192	36.00 6.300	0.740 18.796	27.000 120.096	0.980 24.89	0.080 2.03	11.30	SPR	C N
0.64	16.256	4316	2.13 54.102	0.530 13.462	8.20 1.435	1.100 27.940	9.400 41.811	0.550 13.97	0.055 1.40	10.00	SPR	CG Z
0.64	16.256	S-321	2.19 55.626	0.316 8.026	956.00 167.300	0.160 4.064	156.000 693.888	1.660 42.16	0.162 4.11	10.30	SST	CG N
0.64	16.256	2926	2.47 62.738	0.532 13.513	6.10 1.068	1.500 38.100	8.900 39.587	0.650 16.51	0.054 1.37	12.00	SPR	CG Z
0.64	16.256	RR-11	2.50 63.500	0.568 14.427	1.30 0.228	2.100 53.340	2.700 12.010	0.410 10.41	0.036 0.91	10.50	SPR	C Z
0.64	16.256	10522	2.63 66.802	0.516 13.106	10.00 1.750	1.300 33.020	13.000 57.824	0.810 20.57	0.062 1.57	13.00	SPR	CG Z
0.64	16.256	11374	2.63 66.802	0.496 12.598	20.00 3.500	0.910 23.114	18.000 80.064	0.810 20.57	0.072 1.83	11.30	SST	CG N
0.64	16.256	11596	2.69 68.326	0.370 9.398	278.00 48.650	0.390 9.906	109.000 484.832	2.200 55.88	0.135 3.43	15.30	SPR	CG Z
0.64	16.256	2624	2.91 73.914	0.430 10.922	71.00 12.425	0.800 20.320	57.000 253.536	2.000 50.80	0.105 2.67	18.00	HD	C Z
0.64	16.256	S-805	2.94 74.676	0.558 14.173	1.60 0.280	2.400 60.960	3.700 16.458	0.550 13.97	0.041 1.04	12.50	SST	C N
0.64	16.256	12455	3.00 76.200	0.480 12.192	24.00 4.200	1.100 27.940	27.000 120.096	1.360 34.54	0.080 2.03	16.00	SPR	C Z
0.64	16.256	S-3037	3.25 82.550	0.430 10.922	58.00 10.150	0.900 22.860	53.000 235.744	2.100 53.34	0.105 2.67	19.00	SST	C N
0.64	16.256	10414	3.31 84.074	0.430 10.922	67.00 11.725	0.850 21.590	57.000 253.536	2.000 50.80	0.105 2.67	19.00	SPR	CG Z
0.64	16.256	11800	3.50 88.900	0.526 13.360	7.70 1.348	1.400 35.560	10.000 44.480	0.740 18.80	0.057 1.45	12.00	SPR	C Z
0.64	16.256	10771	4.00 101.600	0.478 12.141	18.00 3.150	1.600 40.640	28.000 124.544	1.780 45.21	0.081 2.06	22.00	SPR	CG GI
0.64	16.256	3437	4.50 114.300	0.530 13.462	3.90 0.683	2.400 60.960	9.400 41.811	1.100 27.94	0.055 1.40	19.00	SPR	C Z
0.64	16.256	3154	4.50 114.300	0.480 12.192	19.00 3.325	1.400 35.560	27.000 120.096	1.570 39.88	0.080 2.03	19.80	SPR	CG Z
0.64	16.256	1593	4.88 123.952	0.400 10.160	92.00 16.100	0.870 22.098	81.000 360.288	3.000 76.20	0.120 3.05	25.00	SPR	CG Z
0.64	16.256	3332	6.00 152.400	0.496 12.598	5.20 0.910	2.900 73.660	15.000 66.720	3.130 79.50	0.072 1.83	42.50	HD	C Z
0.64	16.256	1531	8.00 203.200	0.500 12.700	5.60 0.980	3.200 81.280	18.000 80.064	2.540 64.52	0.070 1.78	35.30	SPR	C Z
0.64	16.256	10152	11.00 279.400	0.570 14.478	0.28 0.049	9.500 241.300	2.600 11.565	1.330 33.78	0.035 0.89	37.00	SPR	C Z
0.653	16.586	12682	0.69 17.526	0.527 13.386	32.00 5.600	0.329 8.357	10.500 46.704	0.361 9.17	0.063 1.59	4.80	SST	C N
0.656	16.662	10241	0.34 8.636	0.496 12.598	411.00 71.925	0.060 1.524	26.000 115.648	0.220 5.59	0.080 2.03	2.75	SPR	CG Z
0.656	16.662	B4-70	0.38 9.652	0.600 15.240	3.10 0.543	0.260 6.604	0.820 3.647	0.110 2.79	0.028 0.71	3.00	SST	C N
0.656	16.662	3645	0.38 9.652	0.574 14.580	17.00 2.975	0.210 5.334	3.700 16.458	0.160 4.06	0.041 1.04	3.00	HD	C Z
0.656	16.662	II-97	0.44 11.176	0.574 14.580	15.00 2.625	0.250 6.350	3.900 17.347	0.160 4.06	0.041 1.04	3.00	SST	C N
0.656	16.662	1763	0.47 11.938	0.562 14.275	18.00 3.150	0.250 6.350	4.300 19.126	0.220 5.59	0.047 1.19	3.75	HD	C Z
0.656	16.662	S-883	0.53 13.462	0.546 13.868	28.00 4.900	0.310 7.874	8.600 38.253	0.210 5.33	0.055 1.40	4.00	SST	CG N
0.656	16.662	12266	0.56 14.224	0.556 14.122	17.00 2.975	0.350 8.890	6.000 26.688	0.220 5.59	0.050 1.27	4.25	SPR	CG Z
0.656	16.662	A-48	0.66 16.764	0.296 7.518	13992.002448.600	0.020 0.508	218.000 969.664	0.540 13.72	0.180 4.57	3.00	HD	CG Z
0.656	16.662	00-48	0.69 17.526	0.576 14.630	5.20 0.910	0.450 11.430	2.300 10.230	0.240 6.10	0.040 1.02	5.00	SPR	C GI
0.656	16.662	A11-28	0.69 17.526	0.560 14.224	15.00 2.625	0.389 9.881	5.800 25.798	0.184 4.67	0.047 1.19	3.90	SST	CG N
0.656	16.662	S-1264	0.69 17.526	0.474 12.040	136.00 23.800	0.190 4.826	25.000 111.200	0.500 12.70	0.091 2.31	5.50	SST	CG N
0.656	16.662	S-1210	0.75 19.050	0.574 14.580	7.60 1.330	0.510 12.954	3.900 17.347	0.210 5.33	0.041 1.04	4.00	SST	C N
0.656	16.662	I-59	0.75 19.050	0.564 14.326	8.20 1.435	0.520 13.208	4.300 19.126	0.230 5.84	0.046 1.17	5.00	SST	CG N
0.656	16.662	S-1403	0.75 19.050	0.532 13.513	44.00 7.700	0.284 7.214	12.500 55.600	0.241 6.12	0.063 1.59	3.90	SST	CG N
0.656	16.662	A15-69	0.75 19.050	0.504 12.802	67.00 11.725	0.320 8.128	21.000 93.408	0.400 10.16	0.076 1.93	5.25	SST	CG N
0.656	16.662	S-1135	0.81 20.574	0.592 15.037	2.40 0.420	0.640 16.256	1.500 6.672	0.170 4.32	0.032 0.81	4.25	SST	C N
0.656	16.662	S-479	0.81 20.574	0.544 13.818	24.00 4.200	0.370 9.398	9.100 40.477	0.240 6.10	0.056 1.42	4.25	SST	CG N
0.656	16.662	B11-57	0.84 21.336	0.520 13.208	60.00 10.500	0.280 7.112	17.000 75.616	0.310 7.87	0.068 1.73	4.50	SPR	C Z
0.656	16.662	A14-64	1.00 25.400	0.568 14.427	8.30 1.453	0.570 14.478	4.800 21.350	0.200 5.08	0.044 1.12	4.50	SST	CG N
0.656	16.662	A14-52	1.00 25.400	0.542 13.767	26.00 4.550	0.400 10.160	10.000 44.480	0.270 6.86	0.057 1.45	4.75	SPR	CG GI
0.656	16.662	S-135	1.00 25.400	0.512 13.005	42.00 7.350	0.430 10.922	18.000 80.064	0.500 12.70	0.072 1.83	6.00	SST	C N
0.656	16.662	A14-63	1.03 26.162	0.562 14.275	12.00 2.100	0.500 12.700	6.200 27.578	0.210 5.33	0.047 1.19	4.50	SPR	CG GI
0.656	16.662	S-1102	1.06 26.924	0.576 14.630	4.20 0.735	0.810 20.574	3.400 15.123	0.250 6.35	0.040 1.02	5.25	SST	C N
0.656	16.662	B9-57	1.06 26.924	0.572 14.529	4.30 0.753	0.790 20.066	3.400 15.123	0.270 6.86	0.042 1.07	6.50	SPR	CG N
0.656	16.662	10327	1.13 28.702	0.548 13.919	12.00 2.100	0.700 17.780	8.700 38.698	0.410 10.41	0.054 1.37	6.50	SPR	C Z
0.656	16.662	S-269	1.13 28.702	0.526 13.360	33.00 5.775	0.450 11.430	15.000 66.720	0.370 9.40	0.065 1.65	5.75	SST	C N
0.656	16.662	11228	1.13 28.702	0.526 13.360	33.00 5.775	0.450 11.430	15.000 66.720	0.370 9.40	0.065 1.65	5.75	SPR	CG Z
0.656	16.662	1601	1.13 28.702	0.476 12.090	87.00 15.225	0.410 10.414	35.000 155.680	0.720 18.29	0.090 2.29	8.00	SPR	C Z
0.656	16.662	Y-26	1.13 28.702	0.406 10.312	1172.00 205.100	0.080 2.032	89.000 395.872	0.500 12.70	0.125 3.18	4.00	SPR	CG Z
0.656	16.662	10453	1.19 30.226	0.522 13.259	30.00 5.250	0.550 13.970	16.000 71.168	0.450 11.43	0.067 1.70	6.75	SPR	CG Z
0.656	16.662	S-425	1.28 32.512	0.548 13.919	13.00 2.275	0.610 15.494	8.200 36.474	0.300 7.62	0.054 1.37	5.75	SST	CG N
0.656	16.662	10794	1.31 33.274	0.564 14.326	7.20 1.260	0.760 19.304	5.400 24.019	0.250 6.35	0.046 1.17	5.50	SST	CG N
0.656	16.662	4330	1.31 33.274	0.536 13.614	12.00 2.100	0.740 18.796	8.700 38.698	0.570 14.48	0.060 1.52	9.50	SPR	CG Z
0.656	16.662	11566	1.34 34.036	0.496 12.598	56.00 9.800	0.470 11.938	26.000 115.648	0.680 17.27	0.080 2.03	7.50	SPR	CG N
0.656	16.662	11420	1.38 35.052	0.512 13.005	43.00 7.525	0.450 11.430	19.000 84.512	0.540 13.72	0.072 1.83	6.50	SPR	C Z
0.656	16.662	10264	1.38 35.052	0.466 11.836	111.00 19.425	0.380 9.652	42.000 186.816	0.860 21.84	0.095 2.41	8.00	SPR	CG Z
0.656	16.662	10712	1.41 35.814	0.612 15.545	0.29 0.051	1.200 30.480	0.360 1.601	0.170 4.32	0.022 0.56	6.50	MW	C Z
0.656	16.662	11129	1.41 35.814									




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish							
0.656	16.662	B18-179	2.00	50.800	0.576	14.630	1.70	0.298	1.600	40.640	2.800	12.454	0.400	10.16	0.040	1.02	10.00	SST CG	N
0.656	16.662	4256	2.00	50.800	0.560	14.224	6.50	1.138	1.000	25.400	6.600	29.357	0.400	10.16	0.048	1.22	7.25	SPR C	Z
0.656	16.662	3130	2.06	52.324	0.530	13.462	12.00	2.100	1.100	27.940	14.000	62.272	0.690	17.53	0.063	1.60	11.00	SPR CG	Z
0.656	16.662	2656	2.25	57.150	0.546	13.868	6.20	1.085	1.500	38.100	9.200	40.922	0.650	16.51	0.055	1.40	11.80	SPR CG	Z
0.656	16.662	N-124	2.50	63.500	0.574	14.580	1.90	0.333	2.000	50.800	3.900	17.347	0.450	11.43	0.041	1.04	10.00	SST C	N
0.656	16.662	2514	2.53	64.262	0.548	13.919	6.80	1.190	1.800	45.720	12.000	53.376	0.550	13.97	0.054	1.37	10.30	MW CG	Z
0.656	16.662	S-1121	2.63	66.802	0.574	14.580	1.90	0.333	2.000	50.800	3.900	17.347	0.450	11.43	0.041	1.04	10.00	SST C	N
0.656	16.662	11616	2.84	72.136	0.414	10.516	161.00	28.175	0.500	12.700	81.000	360.288	1.880	47.75	0.121	3.07	14.50	SPR CG	Z
0.656	16.662	1635	2.88	73.152	0.496	12.598	32.00	5.600	0.810	20.574	26.000	115.648	1.000	25.40	0.080	2.03	11.50	SPR C	Z
0.656	16.662	10997	3.06	77.724	0.446	11.328	87.00	15.225	0.640	16.256	56.000	249.088	1.470	37.34	0.105	2.67	14.00	HD CG	Z
0.656	16.662	S-3179	3.31	84.074	0.446	11.328	50.00	25.400	1.000	52.000	231.296	2.100	53.34	0.105	2.67	20.00	SST CG	N	
0.656	16.662	S-1525	3.50	88.900	0.594	15.088	0.29	0.051	2.900	73.660	0.830	3.692	0.600	15.24	0.031	0.79	18.50	SST C	N
0.656	16.662	11393	3.50	88.900	0.562	14.275	2.30	0.403	2.700	68.580	6.100	27.133	0.790	20.07	0.047	1.19	15.80	HD C	GI
0.656	16.662	11811	3.59	91.186	0.428	10.871	85.00	14.875	0.800	20.320	68.000	302.464	2.280	57.91	0.114	2.90	20.00	SPR CG	Z
0.656	16.662	3337	4.00	101.600	0.542	13.767	6.40	1.120	1.600	40.640	10.000	44.480	0.800	20.32	0.057	1.45	13.00	SPR C	Z
0.656	16.662	2684	4.94	125.476	0.532	13.513	4.60	0.805	2.900	73.660	13.000	57.824	1.570	39.88	0.062	1.57	24.30	HD C	Z
0.656	16.662	4265	6.00	152.400	0.532	13.513	2.70	0.473	3.500	88.900	9.200	40.922	2.540	64.52	0.062	1.57	40.00	SPR C	Z
0.656	16.662	1883	6.50	165.100	0.532	13.513	3.40	0.595	3.900	99.060	13.000	57.824	2.050	52.07	0.062	1.57	32.00	HD C	Z
0.656	16.662	10289	9.50	241.300	0.512	13.005	4.90	0.858	3.900	99.060	19.000	84.512	3.060	77.72	0.072	1.83	41.50	SPR C	Z
0.656	16.662	4019	18.50	469.900	0.522	13.259	2.00	0.350	8.200	208.280	16.000	71.168	4.960	125.98	0.067	1.70	73.00	HD C	BO
0.66	16.764	71865	0.63	16.002	0.562	14.275	23.00	4.025	0.410	10.414	9.600	42.701	0.170	4.32	0.049	1.24	3.50	MW CG	N
0.66	16.764	71865S	0.63	16.002	0.562	14.275	20.00	3.500	0.330	8.382	6.500	28.912	0.170	4.32	0.049	1.24	3.50	SST CG	N
0.66	16.764	71877	0.63	16.002	0.550	13.970	36.00	6.300	0.350	8.890	13.000	57.824	0.200	5.08	0.055	1.40	3.63	MW CG	N
0.66	16.764	71877S	0.63	16.002	0.550	13.970	31.00	5.425	0.280	7.112	8.600	38.253	0.200	5.08	0.055	1.40	3.63	SST CG	N
0.66	16.764	71889S	0.63	16.002	0.534	13.564	47.00	8.225	0.264	6.706	12.400	55.155	0.244	6.20	0.063	1.59	3.90	SST CG	N
0.66	16.764	71889	0.63	16.002	0.534	13.564	56.00	9.800	0.340	8.636	19.000	84.512	0.240	6.10	0.063	1.60	3.88	MW CG	N
0.66	16.764	71901	0.63	16.002	0.526	13.360	71.00	12.425	0.320	8.128	23.000	102.304	0.270	6.86	0.067	1.70	4.00	MW CG	N
0.66	16.764	71901S	0.63	16.002	0.526	13.360	60.00	10.500	0.260	6.604	15.000	66.720	0.270	6.86	0.067	1.70	4.00	SST CG	N
0.66	16.764	71913	0.63	16.002	0.516	13.106	94.00	16.450	0.280	7.112	27.000	120.096	0.290	7.37	0.072	1.83	4.00	MW CG	N
0.66	16.764	71913S	0.63	16.002	0.516	13.106	80.00	14.000	0.220	5.588	18.000	80.064	0.290	7.37	0.072	1.83	4.00	SST CG	N
0.66	16.764	71866	0.75	19.050	0.562	14.275	18.00	3.150	0.530	13.462	9.600	42.701	0.200	5.08	0.049	1.24	4.00	MW CG	N
0.66	16.764	71866S	0.75	19.050	0.562	14.275	15.00	2.625	0.420	10.668	6.500	28.912	0.200	5.08	0.049	1.24	4.00	SST CG	N
0.66	16.764	71878	0.75	19.050	0.550	13.970	29.00	5.075	0.440	11.176	13.000	57.824	0.220	5.59	0.055	1.40	4.00	MW CG	N
0.66	16.764	71878S	0.75	19.050	0.550	13.970	25.00	4.375	0.350	8.890	8.600	38.253	0.220	5.59	0.055	1.40	4.00	SST CG	N
0.66	16.764	71890S	0.75	19.050	0.534	13.564	38.00	6.650	0.327	8.306	12.400	55.155	0.272	6.91	0.063	1.59	4.40	SST CG	N
0.66	16.764	71890	0.75	19.050	0.534	13.564	45.00	7.875	0.430	10.922	19.000	84.512	0.280	7.11	0.063	1.60	4.38	MW CG	N
0.66	16.764	71902	0.75	19.050	0.526	13.360	56.00	9.800	0.400	10.160	23.000	102.304	0.300	7.62	0.067	1.70	4.50	MW CG	N
0.66	16.764	71902S	0.75	19.050	0.526	13.360	48.00	8.400	0.320	8.128	15.000	66.720	0.300	7.62	0.067	1.70	4.50	SST CG	N
0.66	16.764	71914	0.75	19.050	0.516	13.106	75.00	13.125	0.360	9.144	27.000	120.096	0.320	8.13	0.072	1.83	4.50	MW CG	N
0.66	16.764	71914S	0.75	19.050	0.516	13.106	63.00	11.025	0.280	7.112	18.000	80.064	0.320	8.13	0.072	1.83	4.50	SST CG	N
0.66	16.764	71867	0.88	22.352	0.562	14.275	15.00	2.625	0.630	16.002	9.600	42.701	0.210	5.33	0.049	1.24	4.38	MW CG	N
0.66	16.764	71867S	0.88	22.352	0.562	14.275	13.00	2.275	0.500	12.700	6.500	28.912	0.210	5.33	0.049	1.24	4.38	SST CG	N
0.66	16.764	71879	0.88	22.352	0.550	13.970	24.00	4.200	0.530	13.462	13.000	57.824	0.250	6.35	0.055	1.40	4.50	MW CG	N
0.66	16.764	71879S	0.88	22.352	0.550	13.970	20.00	3.500	0.420	10.668	8.600	38.253	0.250	6.35	0.055	1.40	4.50	SST CG	N
0.66	16.764	71891S	0.88	22.352	0.534	13.564	32.00	5.600	0.388	9.855	12.400	55.155	0.300	7.62	0.063	1.59	4.80	SST CG	N
0.66	16.764	71891	0.88	22.352	0.534	13.564	37.00	6.475	0.510	12.954	19.000	84.512	0.310	7.87	0.063	1.60	4.88	MW CG	N
0.66	16.764	71903	0.88	22.352	0.526	13.360	47.00	8.225	0.480	12.192	23.000	102.304	0.340	8.64	0.067	1.70	5.00	MW CG	N
0.66	16.764	71903S	0.88	22.352	0.526	13.360	40.00	7.000	0.390	9.906	15.000	66.720	0.340	8.64	0.067	1.70	5.00	SST CG	N
0.66	16.764	71915	0.88	22.352	0.516	13.106	62.00	10.850	0.430	10.922	27.000	120.096	0.370	9.40	0.072	1.83	5.13	MW CG	N
0.66	16.764	71915S	0.88	22.352	0.516	13.106	53.00	9.275	0.340	8.636	18.000	80.064	0.370	9.40	0.072	1.83	5.13	SST CG	N
0.66	16.764	71868	1.00	25.400	0.562	14.275	13.00	2.275	0.730	18.542	9.600	42.701	0.230	5.84	0.049	1.24	4.75	MW CG	N
0.66	16.764	71868S	1.00	25.400	0.562	14.275	11.00	1.925	0.580	14.732	6.500	28.912	0.230	5.84	0.049	1.24	4.75	SST CG	N
0.66	16.764	71880	1.00	25.400	0.550	13.970	21.00	3.675	0.610	15.494	13.000	57.824	0.270	6.86	0.055	1.40	4.88	MW CG	N
0.66	16.764	71880S	1.00	25.400	0.550	13.970	18.00	3.150	0.490	12.446	8.600	38.253	0.270	6.86</td					




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh
0.66	16.764	71871	1.75 44.450	0.562 14.275	7.20 1.260	1.300 33.020	9.600 42.701	0.340 8.64	0.049 1.24	7.00	MW	CG N
0.66	16.764	71873	1.75 44.450	0.562 14.275	6.10 1.068	1.100 27.940	6.500 28.912	0.340 8.64	0.049 1.24	7.00	SST	CG N
0.66	16.764	71883	1.75 44.450	0.550 13.970	11.00 1.925	1.100 27.940	13.000 57.824	0.400 10.16	0.055 1.40	7.25	MW	CG N
0.66	16.764	71883S	1.75 44.450	0.550 13.970	9.60 1.680	0.890 22.606	8.600 38.253	0.400 10.16	0.055 1.40	7.25	SST	CG N
0.66	16.764	71895	1.75 44.450	0.534 13.564	15.00 2.625	0.828 21.031	12.400 55.155	0.498 12.65	0.063 1.59	8.00	SST	CG N
0.66	16.764	71895	1.75 44.450	0.534 13.564	17.00 2.975	1.100 27.940	19.000 84.512	0.520 13.21	0.063 1.60	8.25	MW	CG N
0.66	16.764	71907	1.75 44.450	0.526 13.360	22.00 3.850	1.100 27.940	23.000 102.304	0.570 14.48	0.067 1.70	8.50	MW	CG N
0.66	16.764	71907S	1.75 44.450	0.526 13.360	18.00 3.150	0.840 21.336	15.000 66.720	0.570 14.48	0.067 1.70	8.50	SST	CG N
0.66	16.764	71919	1.75 44.450	0.516 13.106	28.00 4.900	0.950 24.130	27.000 120.096	0.630 16.00	0.072 1.83	8.75	MW	CG N
0.66	16.764	71919S	1.75 44.450	0.516 13.106	24.00 4.200	0.750 19.050	18.000 80.064	0.630 16.00	0.072 1.83	8.75	SST	CG N
0.66	16.764	71872	2.00 50.800	0.562 14.275	6.30 1.103	1.500 38.100	9.600 42.701	0.390 9.91	0.049 1.24	7.88	MW	CG N
0.66	16.764	71872S	2.00 50.800	0.562 14.275	5.30 0.928	1.200 30.480	6.500 28.912	0.390 9.91	0.049 1.24	7.88	SST	CG N
0.66	16.764	71884	2.00 50.800	0.550 13.970	9.80 1.715	1.300 33.020	13.000 57.824	0.440 11.18	0.055 1.40	8.00	MW	CG N
0.66	16.764	71884S	2.00 50.800	0.550 13.970	8.30 1.453	1.000 25.400	8.600 38.253	0.440 11.18	0.055 1.40	8.00	SST	CG N
0.66	16.764	71896S	2.00 50.800	0.534 13.564	13.00 2.275	0.955 24.257	12.400 55.155	0.555 14.10	0.063 1.59	8.90	SST	CG N
0.66	16.764	71896	2.00 50.800	0.534 13.564	15.00 2.625	1.300 33.020	19.000 84.512	0.580 14.73	0.063 1.60	9.25	MW	CG N
0.66	16.764	71908	2.00 50.800	0.526 13.360	19.00 3.325	1.200 30.480	23.000 102.304	0.640 16.26	0.067 1.70	9.50	MW	CG N
0.66	16.764	71908S	2.00 50.800	0.526 13.360	16.00 2.800	0.970 24.638	15.000 66.720	0.640 16.26	0.067 1.70	9.50	SST	CG N
0.66	16.764	71920	2.00 50.800	0.516 13.106	25.00 4.375	1.100 27.940	27.000 120.096	0.700 17.78	0.072 1.83	9.75	MW	CG N
0.66	16.764	71920S	2.00 50.800	0.516 13.106	21.00 3.675	0.860 21.844	18.000 80.064	0.700 17.78	0.072 1.83	9.75	SST	CG N
0.66	16.764	71873	2.25 57.150	0.562 14.275	5.50 0.963	1.700 43.180	9.600 42.701	0.420 10.67	0.049 1.24	8.63	MW	CG N
0.66	16.764	71873S	2.25 57.150	0.562 14.275	4.70 0.823	1.400 35.560	6.500 28.912	0.420 10.67	0.049 1.24	8.63	SST	CG N
0.66	16.764	71885	2.25 57.150	0.550 13.970	8.60 1.505	1.500 38.100	13.000 57.824	0.490 12.45	0.055 1.40	8.88	MW	CG N
0.66	16.764	71885S	2.25 57.150	0.550 13.970	7.30 1.278	1.200 30.480	8.600 38.253	0.490 12.45	0.055 1.40	8.88	SST	CG N
0.66	16.764	71897S	2.25 57.150	0.534 13.564	11.00 1.925	1.129 28.677	12.400 55.155	0.633 16.08	0.063 1.59	10.10	SST	CG N
0.66	16.764	71897	2.25 57.150	0.534 13.564	13.00 2.275	1.400 35.560	19.000 84.512	0.640 16.26	0.063 1.60	10.10	MW	CG N
0.66	16.764	71909	2.25 57.150	0.526 13.360	17.00 2.975	1.400 35.560	23.000 102.304	0.700 17.78	0.067 1.70	10.40	MW	CG N
0.66	16.764	71909S	2.25 57.150	0.526 13.360	14.00 2.450	1.100 27.940	15.000 66.720	0.700 17.78	0.067 1.70	10.40	SST	CG N
0.66	16.764	71921	2.25 57.150	0.516 13.106	22.00 3.850	1.200 30.480	27.000 120.096	0.780 19.81	0.072 1.83	10.90	MW	CG N
0.66	16.764	71921S	2.25 57.150	0.516 13.106	18.00 3.150	0.980 24.892	18.000 80.064	0.780 19.81	0.072 1.83	10.90	SST	CG N
0.66	16.764	71874	2.50 63.500	0.562 14.275	5.00 0.875	1.900 48.260	9.600 42.701	0.460 11.68	0.049 1.24	9.38	MW	CG N
0.66	16.764	71874S	2.50 63.500	0.562 14.275	4.20 0.735	1.500 38.100	6.500 28.912	0.460 11.68	0.049 1.24	9.38	SST	CG N
0.66	16.764	71886	2.50 63.500	0.550 13.970	7.80 1.365	1.600 40.640	13.000 57.824	0.530 13.46	0.055 1.40	9.63	MW	CG N
0.66	16.764	71886S	2.50 63.500	0.550 13.970	6.60 1.155	1.300 33.020	8.600 38.253	0.530 13.46	0.055 1.40	9.63	SST	CG N
0.66	16.764	71898S	2.50 63.500	0.534 13.564	9.90 1.733	1.254 31.852	12.400 55.155	0.690 17.53	0.063 1.59	11.00	SST	CG N
0.66	16.764	71898	2.50 63.500	0.534 13.564	12.00 2.100	1.600 40.640	19.000 84.512	0.700 17.78	0.063 1.60	11.10	MW	CG N
0.66	16.764	71910	2.50 63.500	0.526 13.360	15.00 2.625	1.500 38.100	23.000 102.304	0.770 19.56	0.067 1.70	11.50	MW	CG N
0.66	16.764	71910S	2.50 63.500	0.526 13.360	12.00 2.100	1.200 30.480	15.000 66.720	0.770 19.56	0.067 1.70	11.50	SST	CG N
0.66	16.764	71922	2.50 63.500	0.516 13.106	19.00 3.325	1.400 35.560	27.000 120.096	0.860 21.84	0.072 1.83	11.90	MW	CG N
0.66	16.764	71922S	2.50 63.500	0.516 13.106	16.00 2.800	1.100 27.940	18.000 80.064	0.860 21.84	0.072 1.83	11.90	SST	CG N
0.66	16.764	71875	2.75 69.850	0.562 14.275	4.50 0.788	2.100 53.340	9.600 42.701	0.500 12.70	0.049 1.24	10.10	MW	CG N
0.66	16.764	71875S	2.75 69.850	0.562 14.275	3.80 0.665	1.700 43.180	6.500 28.912	0.500 12.70	0.049 1.24	10.10	SST	CG N
0.66	16.764	71887	2.75 69.850	0.550 13.970	7.00 1.225	1.800 45.720	13.000 57.824	0.580 14.73	0.055 1.40	10.50	MW	CG N
0.66	16.764	71887S	2.75 69.850	0.550 13.970	6.00 1.050	1.400 35.560	8.600 38.253	0.580 14.73	0.055 1.40	10.50	SST	CG N
0.66	16.764	71899S	2.75 69.850	0.534 13.564	9.00 1.575	1.380 35.052	12.400 55.155	0.746 18.95	0.063 1.59	11.90	SST	CG N
0.66	16.764	71899	2.75 69.850	0.534 13.564	11.00 1.925	1.800 45.720	19.000 84.512	0.760 19.30	0.063 1.60	12.00	MW	CG N
0.66	16.764	71911	2.75 69.850	0.526 13.360	13.00 2.275	1.700 43.180	23.000 102.304	0.840 21.34	0.067 1.70	12.50	MW	CG N
0.66	16.764	71911S	2.75 69.850	0.526 13.360	11.00 1.925	1.400 35.560	15.000 66.720	0.840 21.34	0.067 1.70	12.50	SST	CG N
0.66	16.764	71923	2.75 69.850	0.516 13.106	18.00 3.150	1.500 38.100	27.000 120.096	0.930 23.62	0.072 1.83	12.90	MW	CG N
0.66	16.764	71923S	2.75 69.850	0.516 13.106	15.00 2.625	1.200 30.480	18.000 80.064	0.930 23.62	0.072 1.83	12.90	SST	CG N
0.66	16.764	71876	3.00 76.200	0.562 14.275	4.10 0.718	2.300 58.420	9.600 42.701	0.530 13.46	0.049 1.24	10.90	MW	CG N
0.66	16.764	71876S	3.00 76.200	0.562 14.275	3.50 0.613	1.900 48.260	6.500 28.912	0.530 13.46	0.049 1.24	10.90	SST	CG N
0.66	16.764	71888	3.00 76.200	0.550 13.970	6.40 1.120	2.000 50.800	13.000 57.824	0.620 15.75	0.055 1.40	11.30	MW	CG N
0.66	16.764	71888S	3.00 76.200	0.550 13.970	5.40 0.945	1.600 40.640	8.600 38.253	0.620 15.75	0.055 1.40	11.30	SST	CG N
0.66	16.764	71900S	3.00 76.200	0.534 13.564	8.20 1.435	1.515 38.481	12.400 55.155	0.807 20.50	0.063 1.59	12.90	SST	CG N
0.66	16.764	71900	3.00 76.200	0.534 13.564	9.70 1.698	2.000 50.800	19.000 84.512	0.820 20.83	0.063 1.60	13.00	MW	CG N
0.66	16.764	71912	3.00 76.200	0.526 13.360	12.00 2.100	1.900 48.260	23.000 102.304	0.900 22.86	0.067 1.70	13.50	MW	CG N
0.66	16.764	71912S	3.00 76.200	0.526 13.360	10.00 1.750	1.500 38.100	15.000 66.720	0.900 22.86	0.067 1.70	13.50	SST	CG N
0.66	16.764	71924	3.00 76.200	0.516 13.106	16.00 2.800	1.700 43.180	27.000 120.096	1.010 25.65	0.072 1.83	14.00	MW	CG N
0.66	16.764	71924S	3.00 76.200	0.516 13.106	14.00 2.450	1.300 33.020	18.000 80.064	1.010 25.65	0.072 1.83	14.00	SST	CG N
0.671	17.043	B9-6	0.38 9.652	0.589 14.961	16.00 2.800	0.210 5.334	3.400 15.123	0.160 4.06	0.041 1.04	3.00	SPR	C Z
0.671	17.043	10520	0.38 9.652	0.511 12.979	38.00 66.500	0.070 1.778	26.000 115.648	0.220 5.59	0.080 2.03	2.75	SPR	CG Z
0.671	17.0											




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h							
0.671	17.043	4270	1.25	31.750	0.555	14.097	8.60	1.505	0.600	15.240	5.100	22.685	0.650	16.51	0.058	1.47	10.30	SPR C	Z
0.671	17.043	3275	1.25	31.750	0.487	12.370	106.00	18.550	0.350	8.890	37.000	164.576	0.740	18.80	0.092	2.34	7.00	SPR C	Z
0.671	17.043	12582	1.30	33.020	0.475	12.065	141.00	24.675	0.320	8.128	45.000	200.160	0.780	19.81	0.098	2.49	7.00	SPR C	N
0.671	17.043	10837	1.44	36.576	0.607	15.418	1.30	0.228	1.200	30.480	1.500	6.672	0.240	6.10	0.032	0.81	6.50	SPR C	Z
0.671	17.043	4262	1.44	36.576	0.527	13.386	40.00	7.000	0.470	11.938	19.000	84.512	0.470	11.94	0.072	1.83	6.50	SPR CG	Z
0.671	17.043	S-786	1.50	38.100	0.563	14.300	9.10	1.593	0.880	22.352	8.000	35.584	0.430	10.92	0.054	1.37	7.00	SST C	N
0.671	17.043	2577	1.50	38.100	0.561	14.249	8.30	1.453	1.000	25.400	8.500	37.808	0.480	12.19	0.055	1.40	8.75	MW CG	GI
0.671	17.043	2858	1.50	38.100	0.561	14.249	8.30	1.453	1.000	25.400	8.500	37.808	0.480	12.19	0.055	1.40	8.75	MW CG	GI
0.671	17.043	2693	1.50	38.100	0.527	13.386	31.00	5.425	0.840	21.336	26.000	115.648	0.560	14.22	0.072	1.83	7.75	MW CG	GI
0.671	17.043	S-1468	1.50	38.100	0.511	12.979	41.00	7.175	0.580	14.732	24.000	106.752	0.640	16.26	0.080	2.03	8.00	SST CG	N
0.671	17.043	10701	1.50	38.100	0.489	12.421	72.00	12.600	0.500	12.700	36.000	160.128	0.820	20.83	0.091	2.31	9.00	SPR CG	Z
0.671	17.043	B10-69	1.56	39.624	0.601	15.265	1.30	0.228	1.300	33.020	1.600	7.117	0.300	7.62	0.035	0.89	8.50	SPR CG	Z
0.671	17.043	3319	1.63	41.402	0.511	12.979	29.00	5.075	0.670	17.018	19.000	84.512	0.960	24.38	0.080	2.03	12.00	SPR CG	Z
0.671	17.043	S-104	1.69	42.926	0.431	10.947	226.00	39.550	0.310	7.874	71.000	315.808	1.080	27.43	0.120	3.05	9.00	SST CG	N
0.671	17.043	B2-61	1.73	43.942	0.563	14.300	12.00	2.100	0.740	18.796	8.500	37.808	0.410	10.41	0.054	1.37	6.50	SPR C	GI
0.671	17.043	S-13	1.75	44.450	0.577	14.656	4.60	0.805	1.200	30.480	5.700	25.354	0.400	10.16	0.047	1.19	7.50	SST C	N
0.671	17.043	3893	1.75	44.450	0.543	13.792	13.00	2.275	1.000	25.400	14.000	62.272	0.700	17.78	0.064	1.63	10.00	SPR C	Z
0.671	17.043	3698	1.81	45.974	0.559	14.199	7.60	1.330	1.200	30.480	9.100	40.477	0.620	15.75	0.056	1.42	10.00	SPR C	Z
0.671	17.043	10682	1.84	46.736	0.447	11.354	167.00	29.225	0.380	9.652	64.000	284.672	1.090	27.69	0.112	2.84	9.75	SPR CG	Z
0.671	17.043	10545	1.84	46.736	0.441	11.201	183.00	32.025	0.370	9.398	69.000	306.912	1.150	29.21	0.115	2.92	10.00	SPR CG	Z
0.671	17.043	25	1.88	47.752	0.511	12.979	30.00	5.250	0.860	21.844	26.000	115.648	1.000	25.40	0.080	2.03	11.50	HD C	Z
0.671	17.043	10357	1.88	47.752	0.431	10.947	210.00	36.750	0.370	9.398	77.000	342.496	1.260	32.00	0.120	3.05	10.50	SPR CG	Z
0.671	17.043	S-1541	1.91	48.514	0.583	14.808	1.90	0.333	1.400	35.560	2.600	11.565	0.530	13.46	0.044	1.12	12.00	SST CG	N
0.671	17.043	S-360	1.91	48.514	0.511	12.979	31.00	5.425	0.780	19.812	24.000	106.752	0.800	20.32	0.080	2.03	10.00	SST CG	N
0.671	17.043	12518	1.94	49.276	0.447	11.354	162.00	28.350	0.390	9.906	64.000	284.672	1.230	31.24	0.112	2.84	10.00	SPR C	N
0.671	17.043	S-64	2.00	50.800	0.577	14.656	3.30	0.578	1.600	40.640	5.200	23.130	0.450	11.43	0.047	1.19	9.50	SST CG	N
0.671	17.043	12086	2.00	50.800	0.541	13.741	8.00	1.400	0.930	23.622	7.400	32.915	1.070	27.18	0.065	1.65	16.50	SPR CG	Z
0.671	17.043	12183	2.03	51.562	0.517	13.132	24.00	4.200	0.950	24.130	23.000	102.304	0.920	23.37	0.077	1.96	12.00	SPR CG	GI
0.671	17.043	10235	2.13	54.102	0.445	11.303	135.00	23.625	0.480	12.192	65.000	289.120	1.360	34.54	0.113	2.87	12.00	SPR CG	GI
0.671	17.043	3036	2.22	56.388	0.547	13.894	9.40	1.645	1.400	35.560	13.000	57.824	0.740	18.80	0.062	1.57	12.00	SPR CG	N
0.671	17.043	12598	2.50	63.500	0.581	14.757	2.70	0.473	2.000	50.800	5.400	24.019	0.500	12.70	0.045	1.14	11.00	MW CG	N
0.671	17.043	11662	2.53	64.262	0.563	14.300	5.20	0.910	1.600	40.640	8.500	37.808	0.650	16.51	0.054	1.37	12.00	SPR CG	Z
0.671	17.043	S-808	2.56	65.024	0.419	10.643	166.00	29.050	0.490	12.446	81.000	360.288	1.730	43.94	0.126	3.20	13.80	SST CG	N
0.671	17.043	4209	2.58	65.532	0.569	14.453	8.20	1.435	0.880	22.352	7.200	32.026	0.410	10.41	0.051	1.30	7.00	SPR CG	N
0.671	17.043	10562	2.91	73.914	0.483	12.268	44.00	7.700	0.900	22.860	40.000	177.920	1.530	38.86	0.094	2.39	15.30	SPR C	Z
0.671	17.043	11744	3.00	76.200	0.551	13.995	7.10	1.243	1.600	40.640	12.000	53.376	0.870	22.10	0.060	1.52	13.50	SPR C	Z
0.671	17.043	S-1363	3.31	84.074	0.589	14.961	1.30	0.228	2.800	71.120	3.800	16.902	0.510	12.95	0.041	1.04	12.50	SST CG	N
0.671	17.043	2613	3.50	88.900	0.541	13.741	7.40	1.295	2.000	50.800	15.000	66.720	1.150	29.21	0.065	1.65	17.50	HD CG	Z
0.671	17.043	11351	4.25	107.950	0.611	15.519	0.24	0.042	3.700	93.980	0.890	3.959	0.160	4.06	0.030	0.76	18.00	SST C	N
0.671	17.043	12013	5.00	127.000	0.577	14.656	1.30	0.228	4.000	101.600	5.100	22.685	1.030	26.16	0.047	1.19	22.00	SST CG	N
0.671	17.043	11988	6.13	155.702	0.575	14.605	1.00	0.175	4.500	114.300	4.700	20.906	1.610	40.89	0.048	1.22	32.50	SPR C	GI
0.671	17.043	1709	7.00	177.800	0.511	12.979	8.80	1.540	2.900	73.660	26.000	115.648	2.760	70.10	0.080	2.03	34.50	SPR CG	Z
0.671	17.043	12065	8.41	213.614	0.551	13.995	7.20	1.260	1.600	40.640	12.000	53.376	0.860	21.84	0.060	1.52	13.30	SPR C	Z
0.687	17.450	S-334	0.47	11.938	0.637	16.180	1.30	0.228	0.360	9.144	0.490	2.180	0.110	2.79	0.025	0.64	3.25	SST C	N
0.687	17.450	S-3120	0.56	14.224	0.639	16.231	0.25	0.044	0.350	8.890	0.090	0.400	0.210	5.33	0.024	0.61	7.75	SST C	N
0.687	17.450	QO-43	0.63	16.002	0.527	13.386	132.00	23.100	0.190	4.826	25.000	111.200	0.320	8.13	0.080	2.03	4.00	SPR CG	Z
0.687	17.450	A-12	0.63	16.002	0.521	13.233	155.00	27.125	0.180	4.572	28.000	124.544	0.330	8.38	0.083	2.11	4.00	HD CG	Z
0.687	17.450	K-52	0.69	17.526	0.579	14.707	19.00	3.325	0.430	10.922	8.300	36.918	0.240	10.41	0.051	1.30	7.00	SPR CG	N
0.687	17.450	W-48	0.72	18.288	0.611	15.519	3.90	0.683	0.510	12.954	2.000	8.896	0.210	5.33	0.038	0.97	4.50	SST C	N
0.687	17.450	S-168	0.72	18.288	0.585	14.859	17.00	2.975	0.390	9.906	6.600	29.357	0.200	5.08	0.051	1.30	4.00	SST CG	N
0.687	17.450	Q-57	0.75	19.050	0.607	15.418	3.90	0.683	0.510	12.954	2.000	8.896	0.240	6.10	0.040	1.02	5.00	SST C	N
0.687	17.450	2975	0.75	19.050	0.593	15.062	8.90	1.558	0.320	13.208	4.600	20.461	0.240	6.10	0.047	1.19	5.00	SPR CG	Z
0.687	17.450	3250	0.75	19.050	0.589	14.961	16.00	2.800	0.420	10.668	6.700	29.802	0.250	6.35	0.049	1.24	4.00	SPR C	Z
0.687	17.450	I-52	0.75	19.050	0.503	12.776	163.00	28.525	0.220	5.588	36.000								




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
0.687	17.450	S-961	1.22	30.988	0.561	14.249	20.00	3.500	0.598	15.189	12,000	53.376	0.369	9.37	0.063	1.59	5.90	SST	CG	N
0.687	17.450	3114	1.25	31.750	0.579	14.707	11.00	1.925	0.750	19.050	8,300	36.918	0.400	10.16	0.054	1.37	6.25	SPR	C	Z
0.687	17.450	Z-41	1.25	31.750	0.579	14.707	8.40	1.470	0.870	22.098	7,300	32.470	0.380	9.65	0.054	1.37	7.00	SST	CG	N
0.687	17.450	S-1471	1.25	31.750	0.563	14.300	19.00	3.325	0.629	15.977	12,000	53.376	0.383	9.73	0.063	1.59	6.10	SST	CG	N
0.687	17.450	I-32	1.25	31.750	0.559	14.199	20.00	3.500	0.690	17.526	14,000	62.272	0.450	11.43	0.064	1.63	7.00	SPR	CG	Z
0.687	17.450	10295	1.25	31.750	0.557	14.148	28.00	4.900	0.510	12.954	14,000	62.272	0.370	9.40	0.065	1.65	5.75	SPR	CG	Z
0.687	17.450	505	1.25	31.750	0.543	13.792	39.00	6.825	0.470	11.938	18,000	80.064	0.520	13.21	0.072	1.83	6.25	HD	C	Z
0.687	17.450	B8-58	1.25	31.750	0.537	13.640	35.00	6.125	0.550	13.970	20,000	88.960	0.530	13.46	0.075	1.91	7.00	SST	CG	N
0.687	17.450	28	1.25	31.750	0.505	12.827	89.00	15.575	0.400	10.160	35,000	155.680	0.750	19.05	0.091	2.31	7.25	HD	C	Z
0.687	17.450	11192	1.31	33.274	0.505	12.827	67.00	11.725	0.490	12.446	33,000	146.784	0.820	20.83	0.091	2.31	9.00	HD	CG	Z
0.687	17.450	11680	1.31	33.274	0.461	11.709	248.00	43.400	0.260	6.604	64,000	284.672	0.790	20.07	0.113	2.87	7.00	SPR	CG	Z
0.687	17.450	12025	1.34	34.036	0.481	12.217	162.00	28.350	0.310	7.874	50,000	222.400	0.820	20.83	0.103	2.62	7.00	SPR	C	Z
0.687	17.450	11367	1.38	35.052	0.527	13.386	41.00	7.175	0.580	14.732	24,000	106.752	0.620	15.75	0.080	2.03	7.75	SST	CG	N
0.687	17.450	S-267	1.44	36.576	0.623	15.824	0.67	0.117	1.200	30.480	0.770	3.425	0.290	7.37	0.032	0.81	9.00	SST	CG	N
0.687	17.450	S-1004	1.50	38.100	0.607	15.418	2.40	0.420	1.200	30.480	2,900	12.899	0.280	7.11	0.040	1.02	7.00	SST	CG	N
0.687	17.450	S-1357	1.50	38.100	0.605	15.367	4.00	0.700	0.910	23.114	3,700	16.458	0.220	5.59	0.041	1.04	5.25	SST	CG	N
0.687	17.450	S-1424	1.50	38.100	0.585	14.859	8.20	1.435	0.800	20.320	6,600	29.357	0.360	9.14	0.051	1.30	6.00	SST	C	N
0.687	17.450	2734	1.50	38.100	0.561	14.249	21.00	3.675	0.880	22.352	18,000	80.064	0.410	10.41	0.063	1.60	6.50	MW	CG	GI
0.687	17.450	S-1387	1.50	38.100	0.553	14.046	21.00	3.675	0.700	17.780	15,000	66.720	0.470	11.94	0.067	1.70	7.00	SST	CG	N
0.687	17.450	B9-49	1.50	38.100	0.551	13.995	26.00	4.550	0.630	16.002	16,000	71.168	0.480	12.19	0.068	1.73	7.00	SPR	CG	N
0.687	17.450	11537	1.50	38.100	0.543	13.792	28.00	4.900	0.670	17.018	18,000	80.064	0.650	16.51	0.072	1.83	8.00	SPR	C	Z
0.687	17.450	11649	1.50	38.100	0.537	13.640	33.00	5.775	0.630	16.002	21,000	93.408	0.600	15.24	0.075	1.91	8.00	SPR	CG	GI
0.687	17.450	11611	1.50	38.100	0.517	13.132	69.00	12.075	0.440	11.176	30,000	133.440	0.680	17.27	0.085	2.16	7.00	SPR	CG	Z
0.687	17.450	A-64	1.50	38.100	0.477	12.116	118.00	20.650	0.450	11.430	53,000	235.744	1.000	25.40	0.105	2.67	9.50	SPR	CG	N
0.687	17.450	2910	1.50	38.100	0.447	11.354	252.00	44.100	0.300	7.620	76,000	338.048	1.020	25.91	0.120	3.05	8.50	SPR	CG	Z
0.687	17.450	S-276	1.50	38.100	0.447	11.354	219.00	38.325	0.320	8.128	69,000	306.912	1.020	25.91	0.120	3.05	8.50	SST	CG	N
0.687	17.450	KK-75	1.53	38.862	0.507	12.878	42.00	7.350	0.810	20.574	34,000	151.232	0.700	17.78	0.090	2.29	7.75	PB	CG	N
0.687	17.450	1917	1.56	39.624	0.497	12.624	87.00	15.225	0.460	11.684	40,000	177.920	0.810	20.57	0.095	2.41	8.50	SPR	CG	Z
0.687	17.450	12172	1.63	41.402	0.567	14.402	7.60	1.330	0.910	23.114	6,800	30.246	0.720	18.29	0.060	1.52	12.00	SPR	CG	Z
0.687	17.450	S-3107	1.63	41.402	0.503	12.776	61.00	10.675	0.560	14.224	34,000	151.232	0.920	23.37	0.092	2.34	9.00	SST	C	N
0.687	17.450	12099	1.63	41.402	0.475	12.065	103.00	18.025	0.460	11.684	47,000	209.056	1.170	29.72	0.106	2.69	11.00	SPR	CG	Z
0.687	17.450	AA-62	1.63	41.402	0.427	10.846	380.00	66.500	0.240	6.096	93,000	413.664	1.070	27.18	0.130	3.30	8.25	SPR	CG	N
0.687	17.450	11559	1.69	42.926	0.565	14.351	12.00	2.100	1.000	25.400	12,000	53.376	0.610	15.49	0.061	1.55	9.00	SPR	CG	Z
0.687	17.450	10872	1.75	44.450	0.619	15.723	1.10	0.193	1.400	35.560	1,700	7.562	0.310	7.87	0.034	0.86	8.00	SPR	C	Z
0.687	17.450	11865	1.75	44.450	0.571	14.503	8.00	1.400	1.200	30.480	9,200	40.922	0.590	14.99	0.058	1.47	9.25	SST	C	N
0.687	17.450	S-71	1.81	45.974	0.503	12.776	54.00	9.450	0.620	15.748	34,000	151.232	0.920	23.37	0.092	2.34	10.00	SST	CG	N
0.687	17.450	10416	1.81	45.974	0.391	9.931	734.00	128.450	0.180	4.572	133,000	591.584	1.180	29.97	0.148	3.76	8.00	SPR	CG	N
0.687	17.450	B2-65	1.84	46.736	0.527	13.386	41.00	7.175	0.620	15.748	25,000	111.200	0.760	19.30	0.080	2.03	8.50	SPR	C	N
0.687	17.450	11111	1.88	47.752	0.505	12.827	36.00	6.300	0.420	10.668	15,000	66.720	1.460	37.08	0.091	2.31	15.00	HD	C	Z
0.687	17.450	12596	1.91	48.514	0.583	14.808	4.40	0.770	1.300	33.020	5,600	24.909	0.640	16.26	0.052	1.32	11.30	MW	C	N
0.687	17.450	S-1620	1.91	48.514	0.521	13.233	34.00	5.950	0.770	19.558	26,000	115.648	0.830	21.08	0.083	2.11	10.00	SST	CG	N
0.687	17.450	I-60	1.94	49.276	0.563	14.300	9.50	1.663	1.258	31.953	12,000	53.376	0.620	15.75	0.063	1.59	10.00	SST	CG	N
0.687	17.450	10468	1.94	49.276	0.503	12.776	49.00	8.575	0.740	18.796	36,000	160.128	1.200	30.48	0.092	2.34	12.00	SPR	C	Z
0.687	17.450	12595	2.00	50.800	0.593	15.062	2.70	0.473	1.400	35.560	4,000	17.792	0.550	13.97	0.047	1.19	11.80	MW	CG	Z
0.687	17.450	2580	2.00	50.800	0.579	14.707	6.90	1.208	1.500	38.100	10,000	44.480	0.490	12.45	0.054	1.37	9.00	MW	CG	Z
0.687	17.450	12220	2.00	50.800	0.525	13.335	46.00	8.050	0.560	14.224	26,000	115.648	0.730	18.54	0.081	2.06	8.00	SPR	C	Z
0.687	17.450	3022	2.06	52.324	0.477	12.116	104.00	18.200	0.510	12.954	53,000	235.744	1.210	30.73	0.105	2.67	10.50	SPR	C	Z
0.687	17.450	3039	2.13	54.102	0.567	14.402	9.40	1.645	1.200	30.480	11,000	48.928	0.600	15.24	0.060	1.52	10.00	SPR	CG	Z
0.687	17.450	3097	2.13	54.102	0.527	13.386	38.00	6.650	0.670	17.018	25,000	111.200	0.720	18.29	0.080	2.03	9.00	SPR	CG	Z
0.687	17.450	S-3138	2.25	57.150	0.567	14.402	8.20	1.435	1.300	33.020	11,000	48.928	0.600	15.24	0.060	1.52	10.00	SST	CG	N
0.687	17.450	10012	2.25	57.150	0.531	13.487	39.00	6.825	0.600	15.240	23,000	102.304	0.700	17.78	0.078	1.98	8.00	SPR	C	Z
0.687	17.450	S-59	2.28	57.912	0.535	13.589	19.00	3.325	1.100	27.940	20,000	88.960	0.910	23.11	0.076	1.93	12.00	SST	CG	N
0.687	17.450	10411	2.38																	




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h	
0.687	17.450	3925	4.50 114.300	0.577 14.656	4.70 0.823	1.900 48.260	8.800 39.142	0.770 19.56	0.055 1.40	13.00	SPR	C	Z
0.687	17.450	11529	4.63 117.602	0.571 14.503	3.90 0.683	2.600 66.040	10.000 44.480	1.150 29.21	0.058 1.47	18.80	SPR	CG	Z
0.687	17.450	10707	4.63 117.602	0.543 13.792	7.20 1.260	2.600 66.040	18.000 80.064	1.800 45.72	0.072 1.83	25.00	SPR	CG	Z
0.687	17.450	11821	5.25 133.350	0.507 12.878	15.00 2.625	2.300 58.420	34.000 151.232	2.880 73.15	0.090 2.29	32.00	SPR	CG	Z
0.687	17.450	358	5.75 146.050	0.543 13.792	6.40 1.120	2.900 73.660	18.000 80.064	2.070 52.58	0.072 1.83	27.80	HD	C	Z
0.687	17.450	364	6.00 152.400	0.543 13.792	6.20 1.085	3.000 76.200	18.000 80.064	2.160 54.86	0.072 1.83	29.00	HD	C	Z
0.687	17.450	2836	6.56 166.624	0.537 13.640	6.00 1.050	3.900 99.060	24.000 106.752	2.630 66.80	0.075 1.91	35.00	MW	CG	GI
0.687	17.450	3961	9.50 241.300	0.543 13.792	4.40 0.770	4.200 106.680	18.000 80.064	2.920 74.17	0.072 1.83	39.50	SPR	C	Z
0.687	17.450	12592	12.10 307.340	0.425 10.795	38.00 6.650	2.500 63.500	95.000 422.560	8.650 219.71	0.131 3.33	66.00	SPR	CG	Z
0.687	17.450	512	16.00 406.400	0.563 14.300	1.30 0.228	9.500 241.300	13.000 57.824	4.280 108.71	0.062 1.57	68.00	HD	C	Z
0.687	17.450	3384	16.00 406.400	0.563 14.300	1.60 0.280	7.700 195.580	13.000 57.824	3.500 88.90	0.062 1.57	55.50	HD	C	Z
0.69	17.526	71925	0.69 17.526	0.588 14.935	107.00 18.725	0.090 2.286	9.700 43.146	0.120 3.05	0.051 1.30	2.38	MW	CG	N
0.69	17.526	71925S	0.69 17.526	0.588 14.935	91.00 15.925	0.070 1.778	6.600 29.357	0.120 3.05	0.051 1.30	2.38	SST	CG	N
0.703	17.856	JJ-55	0.50 12.700	0.635 16.129	4.50 0.788	0.360 9.144	1.600 7.117	0.140 3.56	0.034 0.86	3.25	SST	C	N
0.703	17.856	Q-53	0.50 12.700	0.635 16.129	2.50 0.438	0.320 8.128	0.800 3.558	0.180 4.57	0.034 0.86	4.25	SST	C	N
0.703	17.856	S-489	0.50 12.700	0.621 15.773	4.10 0.718	0.250 6.350	1.000 4.448	0.250 6.35	0.041 1.04	5.00	SST	CG	N
0.703	17.856	K-12	0.50 12.700	0.503 12.776	656.00 114.800	0.070 1.778	45.000 200.160	0.300 7.62	0.100 2.54	3.00	SPR	CG	N
0.703	17.856	S-795	0.59 14.986	0.609 15.469	11.00 1.925	0.410 10.414	4.400 19.571	0.190 4.83	0.047 1.19	4.00	SST	CG	N
0.703	17.856	4144	0.63 16.002	0.605 15.367	9.90 1.733	0.330 8.382	3.300 14.678	0.290 7.37	0.049 1.24	5.00	SPR	C	Z
0.703	17.856	I-62	0.63 16.002	0.595 15.113	19.00 3.325	0.390 9.906	7.700 34.250	0.220 5.59	0.054 1.37	4.00	SST	CG	N
0.703	17.856	00-68	0.66 16.764	0.443 11.252	1091.00 190.925	0.080 2.032	91.000 404.768	0.520 13.21	0.130 3.30	4.00	SPR	CG	Z
0.703	17.856	QQ-42	0.69 17.526	0.643 16.332	0.95 0.166	0.480 12.192	0.460 2.046	0.210 5.33	0.030 0.76	6.00	MW	C	Z
0.703	17.856	Q-64	0.69 17.526	0.621 15.773	5.00 0.875	0.460 11.684	2.300 10.230	0.230 5.84	0.041 1.04	4.50	SST	C	N
0.703	17.856	PP-79	0.69 17.526	0.559 14.199	53.00 9.275	0.320 8.128	17.000 75.616	0.320 8.13	0.072 1.83	4.50	SST	CG	N
0.703	17.856	3846	0.75 19.050	0.645 16.383	0.83 0.145	0.550 13.970	0.450 2.002	0.200 5.08	0.029 0.74	6.00	MW	C	Z
0.703	17.856	4242	0.75 19.050	0.623 15.824	4.20 0.735	0.550 13.970	2.300 10.230	0.200 5.08	0.040 1.02	5.00	SPR	CG	Z
0.703	17.856	3880	0.75 19.050	0.579 14.707	40.00 7.000	0.300 7.620	12.000 53.376	0.310 7.87	0.062 1.57	4.00	HD	C	Z
0.703	17.856	2516	0.75 19.050	0.557 14.148	82.00 14.350	0.320 8.128	26.000 115.648	0.290 7.37	0.073 1.85	4.00	MW	CG	Z
0.703	17.856	10427	0.78 19.812	0.653 16.586	0.72 0.126	0.640 16.256	0.460 2.046	0.140 3.56	0.025 0.64	4.50	MW	C	Z
0.703	17.856	XX-53	0.81 20.574	0.579 14.707	18.00 3.150	0.350 8.890	6.200 27.578	0.470 11.94	0.062 1.57	6.50	SPR	C	Z
0.703	17.856	12216	0.84 21.336	0.621 15.773	7.00 1.225	0.550 13.970	3.800 16.902	0.210 5.33	0.041 1.04	4.00	SPR	C	Z
0.703	17.856	11429	0.88 22.352	0.503 12.776	166.00 29.050	0.250 6.350	42.000 186.816	0.550 13.97	0.100 2.54	5.50	SST	CG	N
0.703	17.856	H-32	1.00 25.400	0.629 15.977	1.40 0.245	0.710 18.034	1.000 4.448	0.290 7.37	0.037 0.94	7.75	SST	CG	N
0.703	17.856	K-21	1.00 25.400	0.621 15.773	6.10 1.068	0.590 14.986	3.600 16.013	0.160 4.06	0.041 1.04	4.00	SST	CG	N
0.703	17.856	S-368	1.00 25.400	0.559 14.199	27.00 4.725	0.500 12.700	13.000 57.824	0.500 12.70	0.072 1.83	7.00	SST	CG	N
0.703	17.856	3590	1.00 25.400	0.521 13.233	108.00 18.900	0.320 8.128	34.000 151.232	0.550 13.97	0.091 2.31	6.00	HD	CG	Z
0.703	17.856	3916	1.00 25.400	0.519 13.183	113.00 19.775	0.320 8.128	36.000 160.128	0.550 13.97	0.092 2.34	6.00	SPR	CG	Z
0.703	17.856	11739	1.03 26.162	0.519 13.183	150.00 26.250	0.240 6.096	36.000 160.128	0.550 13.97	0.092 2.34	5.00	SPR	C	Z
0.703	17.856	10471	1.06 26.924	0.507 12.878	141.00 24.675	0.300 7.620	43.000 191.264	0.610 15.49	0.098 2.49	6.25	SPR	CG	Z
0.703	17.856	10526	1.06 26.924	0.391 9.931	130.00 227.500	0.110 2.794	148.000 658.304	0.940 23.88	0.156 3.96	6.00	SPR	CG	N
0.703	17.856	11760	1.09 27.686	0.453 11.506	428.00 74.900	0.200 5.080	84.000 373.632	0.780 19.81	0.125 3.18	6.25	SPR	CG	Z
0.703	17.856	2575	1.09 27.686	0.443 11.252	513.00 89.775	0.250 6.350	127.000 564.896	0.810 20.57	0.130 3.30	6.25	MW	CG	Z
0.703	17.856	S-12	1.13 28.702	0.573 14.554	14.00 2.450	0.610 15.494	8.700 38.698	0.520 13.21	0.065 1.65	8.00	SST	CG	N
0.703	17.856	S-1247	1.13 28.702	0.533 13.538	65.00 11.375	0.420 10.668	28.000 124.544	0.530 13.46	0.085 2.16	6.25	SST	CG	N
0.703	17.856	2644	1.13 28.702	0.453 11.506	485.00 84.875	0.170 4.318	84.000 373.632	0.720 18.29	0.125 3.18	5.75	SPR	CG	Z
0.703	17.856	A10-46	1.13 28.702	0.427 10.846	680.00 119.000	0.160 4.064	108.000 480.384	0.860 21.84	0.138 3.51	6.25	SPR	CG	Z
0.703	17.856	2573	1.19 30.226	0.639 16.231	1.20 0.210	0.960 24.384	1.200 5.338	0.220 5.59	0.032 0.81	6.00	HD	C	Z
0.703	17.856	11878	1.19 30.226	0.601 15.265	6.20 1.085	0.830 21.082	5.200 23.130	0.360 9.14	0.051 1.30	7.00	SST	CG	Z
0.703	17.856	11293	1.19 30.226	0.533 13.538	79.00 13.825	0.370 9.398	29.000 128.992	0.510 12.95	0.085 2.16	6.00	SPR	CG	Z
0.703	17.856	AA-69	1.25 31.750	0.543 13.792	62.00 10.850	0.370 9.398	23.000 102.304	0.440 11.18	0.080 2.03	5.50	SST	CG	N
0.703	17.856	2676	1.25 31.750	0.517 13.132	118.00 20.650	0.430 10.922	51.000 226.848	0.650 16.51	0.093 2.36	6.00	MW	C	Z
0.703	17.856	B11-66	1.25 31.750	0.453 11.506	428.00 74.900	0.200 5.080	84.000 373.632	0.780 19.81	0.125 3.18	6.25	SPR	CG	Z
0.703	17.856	11943	1.28 32.512	0.567 14.402	30.00 3.020	0.5250 0.540	13.716 16.000	0.410 10.41	0.068 1.73	6.00	SPR	CG	Z
0.703	17.856	10920	1.31 33.274	0.513 13.030	83.00 14.525	0.470 11.938	39.000 173.472	0.780 19.81	0.095 2.41	8.25	SPR	CG	Z
0.703	17.856	3164	1.34 34.036	0.575 14.605	15.00 2.625	0.770 19.558	12.000 53.376	0.580 14.73	0.064 1.63	8.00	SPR	C	Z
0.703	17.856	11378	1.41 35.814	0.559 14.199	24.00 4.200	0.710 18.034	17.000 75.616	0.560 14.22	0.072 1.83	7.75	SST	CG	N
0.703	17.856	3517	1.44 36.576	0.559 14.199	24.00 4.200	0.760 19.304	18.000 80.064	0.610 15.49	0.072 1.83	8.50	HD	CG	Z
0.703	17.856	A10-67	1.50 38.100	0.631 16.027	1.80 0.315	1.200 30.480	2.300 10.230	0.250 6.35	0.036 0.91	6.00	SST	C	N
0.703	17.856	A15-62	1.50 38.100	0.617 15.672	4.70 0.823	0.890 22.606	4.200 18.682	0.230 5.84	0.043 1.09	5.25	SST	CG	N
0.703	17.856	11675	1.50 38.100	0.583 14.808	14.00 2.450	0.790 20.066	11.000 48.928	0.420 10.67	0.060 1.52	7.00	SPR	CG	GI
0.703	17.856	S-1289	1.50 38.100	0.579 14.707	16.00 2.800	0.731 18.567	11.700 52.042	0.409 10.39	0.063 1.5				




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h
0.703	17.856	3422	2.19 55.626	0.463 11.760	201.00 35.175	0.370 9.398	74.000 329.152	1.260 32.00	0.120 3.05	9.50	SPR	C Z
0.703	17.856	3672	2.22 56.388	0.557 14.148	18.00 3.150	1.000 25.400	19.000 84.512	0.800 20.32	0.073 1.85	11.00	SPR	CG Z
0.703	17.856	S-1495	2.38 60.452	0.579 14.707	5.80 1.015	1.473 37.414	8.500 37.808	0.907 23.04	0.063 1.59	14.50	SST	CG N
0.703	17.856	10415	2.56 65.024	0.477 12.116	114.00 19.950	0.550 13.970	63.000 280.224	1.360 34.54	0.113 2.87	12.00	SPR	CG Z
0.703	17.856	12274	2.69 68.326	0.577 14.656	7.90 1.383	1.600 40.640	13.000 57.824	0.820 20.83	0.063 1.60	13.00	SPR	CG Z
0.703	17.856	3063	2.72 69.088	0.513 13.030	41.00 7.175	0.960 24.384	39.000 173.472	1.400 35.56	0.095 2.41	14.80	SPR	CG Z
0.703	17.856	12039	2.84 72.136	0.543 13.792	22.00 3.850	1.100 27.940	25.000 111.200	1.040 26.42	0.080 2.03	13.00	SPR	CG Z
0.703	17.856	10523	3.06 77.724	0.583 14.808	5.30 0.928	2.100 53.340	11.000 48.928	0.920 23.37	0.060 1.52	15.30	SPR	CG GI
0.703	17.856	S-1200	3.38 85.852	0.559 14.199	7.90 1.383	2.000 50.800	16.000 71.168	1.370 34.80	0.072 1.83	19.00	SST	CG N
0.703	17.856	11274	3.50 88.900	0.521 13.233	36.00 6.300	0.960 24.384	34.000 151.232	1.270 32.26	0.091 2.31	14.00	SPR	CG Z
0.703	17.856	11273	3.50 88.900	0.507 12.878	33.00 5.775	1.300 33.020	43.000 191.264	1.960 49.78	0.098 2.49	20.00	SPR	CG Z
0.703	17.856	11344	3.50 88.900	0.407 10.338	336.00 58.800	0.390 9.906	131.000 582.688	2.070 52.58	0.148 3.76	14.00	SPR	CG Z
0.703	17.856	11725	4.13 104.902	0.613 15.570	2.30 0.403	2.200 55.880	5.100 22.685	0.500 12.70	0.045 1.14	11.00	SPR	CG GI
0.703	17.856	3052	4.13 104.902	0.579 14.707	5.00 0.875	2.400 60.960	12.000 53.376	1.120 28.45	0.062 1.57	18.00	SPR	CG Z
0.703	17.856	12450	4.13 104.902	0.493 12.522	50.00 8.750	1.100 27.940	52.000 231.296	1.940 49.28	0.105 2.67	18.50	SPR	CG Z
0.703	17.856	10446	4.25 107.950	0.463 11.760	66.00 11.550	1.100 27.940	74.000 329.152	2.970 75.44	0.120 3.05	24.80	SPR	CG Z
0.703	17.856	12283	4.41 112.014	0.553 14.046	9.20 1.610	2.200 55.880	20.000 88.960	1.650 41.91	0.075 1.91	22.00	SPR	CG Z
0.703	17.856	S-3013	4.50 114.300	0.563 14.300	7.60 1.330	2.000 50.800	16.000 71.168	1.230 31.24	0.070 1.78	17.50	SST	CG N
0.703	17.856	3481	6.00 152.400	0.583 14.808	3.90 0.683	2.900 73.660	11.000 48.928	1.260 32.00	0.060 1.52	20.00	SPR	C Z
0.703	17.856	10270	6.00 152.400	0.391 9.931	198.00 34.650	0.750 19.050	148.000 658.304	4.410 112.01	0.156 3.96	28.30	SPR	CG Z
0.703	17.856	12171	8.13 206.502	0.489 12.421	22.00 3.850	2.500 63.500	55.000 244.640	4.490 114.05	0.107 2.72	42.00	SPR	CG Z
0.703	17.856	3705	8.75 222.250	0.573 14.554	2.40 0.420	5.800 147.320	14.000 62.272	2.830 71.88	0.065 1.65	42.50	SPR	CG Z
0.71	18.034	12806	0.63 16.002	0.526 13.360	218.00 38.150	0.160 4.064	35.000 155.680	0.370 9.40	0.092 2.34	4.00	SPR	C Z
0.718	18.237	B2-48	0.41 10.414	0.666 16.916	3.40 0.595	0.270 6.858	0.950 4.226	0.090 2.29	0.026 0.66	2.50	SST	C N
0.718	18.237	S-1381	0.44 11.176	0.616 15.646	14.00 2.450	0.230 5.842	3.300 14.678	0.200 5.08	0.051 1.30	4.00	SST	CG N
0.718	18.237	S-20	0.50 12.700	0.592 15.037	70.00 12.250	0.170 4.318	12.000 53.376	0.250 6.35	0.063 1.60	3.00	SST	C N
0.718	18.237	S-216	0.50 12.700	0.532 13.513	192.00 33.600	0.130 3.302	25.000 111.200	0.370 9.40	0.093 2.36	4.00	SST	CG N
0.718	18.237	HH-91	0.59 14.986	0.612 15.545	17.00 2.975	0.380 9.652	6.500 28.912	0.210 5.33	0.053 1.35	4.00	SST	CG N
0.718	18.237	KK-80	0.59 14.986	0.606 15.392	32.00 5.600	0.270 6.858	8.900 39.587	0.200 5.08	0.056 1.42	3.50	SPR	CG Z
0.718	18.237	MM-79	0.63 16.002	0.638 16.205	4.20 0.735	0.450 11.430	1.900 8.451	0.180 4.57	0.040 1.02	4.50	SST	CG N
0.718	18.237	1945	0.66 16.764	0.612 15.545	19.00 3.325	0.390 9.906	7.500 33.360	0.270 6.86	0.053 1.35	4.00	SPR	C Z
0.718	18.237	12261	0.66 16.764	0.612 15.545	17.00 2.975	0.390 9.906	6.700 29.802	0.270 6.86	0.053 1.35	4.00	SST	C N
0.718	18.237	S-125	0.66 16.764	0.532 13.513	120.00 21.000	0.170 4.318	20.000 88.960	0.490 12.45	0.093 2.36	5.25	SST	CG N
0.718	18.237	3750	0.69 17.526	0.590 14.986	25.00 4.375	0.270 6.858	6.700 29.802	0.420 10.67	0.064 1.63	5.50	HD	C Z
0.718	18.237	S-3142	0.69 17.526	0.536 13.614	199.00 34.825	0.160 4.064	31.000 137.888	0.430 10.92	0.091 2.31	3.75	SST	C N
0.718	18.237	S-3180	0.75 19.050	0.636 16.154	5.70 0.998	0.590 14.986	3.300 14.678	0.160 4.06	0.041 1.04	4.00	SST	CG N
0.718	18.237	W-38	0.75 19.050	0.634 16.104	4.20 0.735	0.540 13.716	2.300 10.230	0.210 5.33	0.042 1.07	5.00	SST	CG N
0.718	18.237	QQ-31	0.75 19.050	0.616 15.646	5.70 0.998	0.340 8.636	1.900 8.451	0.410 10.41	0.051 1.30	7.00	SST	C N
0.718	18.237	11458	0.75 19.050	0.574 14.580	51.00 8.925	0.330 8.382	17.000 75.616	0.400 10.16	0.072 1.83	4.50	SST	C N
0.718	18.237	A9-38	0.81 20.574	0.634 16.104	6.40 1.120	0.590 14.986	3.800 16.902	0.210 5.33	0.042 1.07	4.00	SST	C N
0.718	18.237	A14-47	0.81 20.574	0.478 12.141	612.00 107.100	0.110 2.794	67.000 298.016	0.480 12.19	0.120 3.05	4.00	SST	CG N
0.718	18.237	12729	0.87 22.098	0.638 16.205	4.10 0.718	0.670 17.018	2.800 12.454	0.200 5.08	0.040 1.02	4.88	MW	CG BO
0.718	18.237	S-1364	0.88 22.352	0.594 15.088	24.00 4.200	0.478 12.141	11.500 51.152	0.301 7.65	0.063 1.59	4.80	SST	CG N
0.718	18.237	10233	0.88 22.352	0.574 14.580	25.00 4.375	0.320 8.128	7.900 35.139	0.560 14.22	0.072 1.83	7.75	SPR	C Z
0.718	18.237	S-1082	1.00 25.400	0.638 16.205	2.90 0.508	0.740 18.796	2.200 9.786	0.260 6.60	0.040 1.02	5.50	SST	C N
0.718	18.237	A12-41	1.00 25.400	0.628 15.951	6.40 1.120	0.730 18.542	4.700 20.906	0.270 6.86	0.045 1.14	5.00	MW	C Z
0.718	18.237	RR-33	1.00 25.400	0.618 15.697	7.50 1.313	0.650 16.510	4.900 21.795	0.350 8.89	0.050 1.27	6.00	SPR	C Z
0.718	18.237	S-878	1.00 25.400	0.610 15.494	11.00 1.925	0.670 17.018	7.500 33.360	0.280 7.11	0.054 1.37	5.25	SST	CG N
0.718	18.237	3973	1.00 25.400	0.574 14.580	48.00 8.400	0.370 9.398	18.000 80.064	0.430 10.92	0.072 1.83	5.00	SPR	C Z
0.718	18.237	CC-80	1.00 25.400	0.546 13.868	98.00 17.150	0.280 7.112	28.000 124.544	0.410 10.41	0.086 2.18	4.75	SST	CG N
0.718	18.237	S-1260	1.03 26.162	0.636 16.154	3.30 0.578	0.810 20.574	2.600 11.565	0.230 5.84	0.041 1.04	5.50	SST	CG N
0.718	18.237	S-3077	1.13 28.702	0.614 15.596	7.70 1.348	0.810 20.574	6.300 28.022	0.310 7.87	0.052 1.32	6.00	SST	CG N
0.718	18.237	10907	1.16 29.464	0.628 15.951	3.40 0.595	0.840 21.336	2.900 12.899	0.320 8.13	0.045 1.14	7.00	SST	CG N
0.718	18.237	S-246	1.22 30.988	0.624 15.850	5.00 0.875	0.890 22.606	4.500 20.016	0.330 8.38	0.047 1.19	6.00	SST	C N
0.718	18.237	S-430	1.22 30.988	0.608 15.443	6.90 1.208	0.800 20.320	5.500 24.464	0.420 10.67	0.055 1.40	7.67	SST	CG N
0.718	18.237	QD-44	1.25 31.750	0.534 13.564	56.00 9.800	0.380 9.652	21.000 93.408	0.870 22.10	0.092 2.34	9.50	SPR	CG Z
0.718	18.237	S-1034	1.31 33.274	0.634 16.104	4.20 0.735	0.900 22.860	3.800 16.902	0.250 6.35	0.042 1.07	5.00	SST	C N
0.718	18.237	3792	1.31 33.274	0.614 15.596	7.90 1.383	0.900 22.860	7.100 31.581	0.340 8.64	0.052 1.32	6.50	SPR	CG GI
0.718	18.237	B11-4	1.31 33.274	0.594 15.088	11.00 1.925	0.750 19.050	8.100 36.029	0.560 14.22	0.062 1.57	9.00	SPR	CG N
0.718	18.237	M-145	1.31 33.274	0.572 14.529	43.00 7.525	0.420 10.668	18.000 80.064	0.470 11.94	0.073 1.85	5.50	SPR	C GI
0.718	18.237	S-69	1.34 34.036	0.610 15.494	14.00 2.450	0.550 13.970	7.500 33.360	0.250 6.35	0.054 1.37	4.67	SST	CG N
0.718	18.237	B10-56	1.38 35.052	0.618 15.697	7.50 1.313	0.840 21.336	6.300 28.022	0.300 7.62	0.050 1.27	6.00	SPR	CG N
0.718	18.237	3993	1.38 35.									




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish							
0.718	18.237	10599	1.94	49.276	0.530	13.462	54.00	9.450	0.680	17.272	37.000	164.576	0.990	25.15	0.094	2.39	10.50	SPR CG	Z
0.718	18.237	YY-33	2.00	50.800	0.628	15.951	2.40	0.420	1.600	40.640	3.700	16.458	0.450	11.43	0.045	1.14	9.00	SST CG	N
0.718	18.237	S-1440	2.00	50.800	0.584	14.834	13.00	2.275	1.100	27.940	14.000	62.272	0.600	15.24	0.067	1.70	9.00	SST CG	N
0.718	18.237	10257	2.00	50.800	0.536	13.614	53.00	9.275	0.630	16.002	34.000	151.232	0.960	24.38	0.091	2.31	9.50	SPR C	Z
0.718	18.237	A15-53	2.00	50.800	0.528	13.411	57.00	9.975	0.620	15.748	36.000	160.128	0.900	22.86	0.095	2.41	9.50	SST CG	N
0.718	18.237	A13-33	2.03	51.562	0.582	14.783	15.00	2.625	1.000	25.400	15.000	66.720	0.600	15.24	0.068	1.73	8.75	SST CG	N
0.718	18.237	2778	2.06	52.324	0.568	14.427	25.00	4.375	1.100	27.940	28.000	124.544	0.730	18.54	0.075	1.91	8.75	MW C	Z
0.718	18.237	10867	2.13	54.102	0.594	15.088	13.00	2.275	0.960	24.384	12.000	53.376	0.500	12.70	0.062	1.57	8.00	SPR CG	GI
0.718	18.237	4367	2.13	54.102	0.584	14.834	11.00	1.925	1.400	35.560	15.000	66.720	0.770	19.56	0.067	1.70	11.50	SPR CG	Z
0.718	18.237	B9-56	2.13	54.102	0.556	14.122	27.00	4.725	0.893	22.682	24.000	106.752	0.831	21.11	0.082	2.08	10.10	SST CG	N
0.718	18.237	2651	2.19	55.626	0.488	12.395	104.00	18.200	0.620	15.748	65.000	289.120	1.500	38.10	0.115	2.92	13.00	SPR CG	Z
0.718	18.237	S-1630	2.22	56.388	0.636	16.154	1.50	0.263	1.800	45.720	2.800	12.454	0.390	9.91	0.041	1.04	9.50	SST CG	N
0.718	18.237	12625	2.22	56.388	0.494	12.548	92.00	16.100	0.650	16.510	60.000	266.880	1.460	37.08	0.112	2.84	13.00	SPR CG	Z
0.718	18.237	3386	2.38	60.452	0.574	14.580	14.00	2.450	1.200	30.480	18.000	80.064	0.860	21.84	0.072	1.83	12.00	SPR CG	Z
0.718	18.237	11575	2.50	63.500	0.526	13.360	39.00	6.825	0.960	24.384	38.000	169.024	1.540	39.12	0.096	2.44	15.00	SPR CG	N
0.718	18.237	N-121	2.53	64.262	0.572	14.529	17.00	2.975	1.100	27.940	18.000	80.064	0.800	20.32	0.073	1.85	11.00	SPR CG	N
0.718	18.237	3739	2.56	65.024	0.558	14.173	23.00	4.025	1.100	27.940	24.000	106.752	0.960	24.38	0.080	2.03	12.00	SPR CG	Z
0.718	18.237	S-3164	2.63	66.802	0.628	15.951	1.10	0.193	1.800	45.720	1.900	8.451	0.860	21.84	0.045	1.14	18.00	SST C	N
0.718	18.237	1707	2.63	66.802	0.570	14.478	18.00	3.150	1.100	27.940	19.000	84.512	0.810	20.57	0.074	1.88	11.00	SPR CG	Z
0.718	18.237	S-1469	2.75	69.850	0.594	15.088	7.50	1.313	1.528	38.811	11.500	51.152	0.689	17.50	0.063	1.59	11.00	SST CG	N
0.718	18.237	10721	3.00	76.200	0.478	12.141	100.00	17.500	0.730	18.542	73.000	324.704	1.920	48.77	0.120	3.05	16.00	SPR CG	Z
0.718	18.237	2509	3.38	85.852	0.534	13.564	23.00	4.025	1.500	38.100	35.000	155.680	1.840	46.74	0.092	2.34	20.00	HD CG	Z
0.718	18.237	10396	3.41	86.614	0.536	13.614	32.00	5.600	1.100	27.940	34.000	151.232	1.320	33.53	0.091	2.31	14.50	SPR CG	Z
0.718	18.237	313	3.50	88.900	0.636	16.154	1.50	0.263	2.400	60.960	3.800	16.902	0.470	11.94	0.041	1.04	10.50	HD C	Z
0.718	18.237	4277	3.50	88.900	0.578	14.681	11.00	1.925	1.500	38.100	16.000	71.168	0.950	24.13	0.070	1.78	13.50	SPR CG	Z
0.718	18.237	11660	3.53	89.662	0.512	13.005	56.00	9.800	0.870	22.098	49.000	217.952	1.490	37.85	0.103	2.62	14.50	SPR CG	Z
0.718	18.237	S-3243	3.84	97.536	0.576	14.630	9.20	1.610	1.700	43.180	16.000	71.168	1.070	27.18	0.071	1.80	15.00	SST CG	N
0.718	18.237	2894	4.50	114.300	0.574	14.580	7.70	1.348	2.300	58.420	18.000	80.064	1.480	37.59	0.072	1.83	20.50	SPR CG	Z
0.718	18.237	S-3026	4.50	114.300	0.562	14.275	13.00	2.275	1.700	43.180	21.000	93.408	1.330	33.78	0.078	1.98	16.00	SST CG	C N
0.718	18.237	12637	4.81	122.174	0.656	16.662	0.30	0.053	4.300	109.220	1.300	5.782	0.470	11.94	0.031	0.79	14.00	SST C	N
0.718	18.237	B8-66	5.13	130.302	0.562	14.275	11.00	1.925	2.100	53.340	22.000	97.856	1.720	43.69	0.078	1.98	21.00	SPR C	N
0.718	18.237	S-997	5.75	146.050	0.640	16.256	0.42	0.074	4.800	121.920	2.000	8.896	0.980	24.89	0.039	0.99	24.30	SST C	N
0.718	18.237	10698	6.25	158.750	0.432	10.973	99.00	17.325	1.200	30.480	117.000	520.416	4.860	123.44	0.143	3.63	34.00	SPR CG	Z
0.719	18.263	U-84	0.61	15.494	0.637	16.180	2.50	0.438	0.340	8.636	0.860	3.825	0.270	6.86	0.041	1.04	6.50	SST C	N
0.72	18.288	71926	0.63	16.002	0.610	15.494	31.00	5.425	0.380	9.652	12.000	53.376	0.190	4.83	0.055	1.40	3.50	MW CG	N
0.72	18.288	71926S	0.63	16.002	0.610	15.494	26.00	4.550	0.300	7.620	7.900	35.139	0.190	4.83	0.055	1.40	3.50	SST CG	N
0.72	18.288	71951S	0.63	16.002	0.594	15.088	40.00	7.000	0.286	7.264	11.400	50.707	0.230	5.84	0.063	1.59	3.70	SST CG	N
0.72	18.288	71951	0.63	16.002	0.594	15.088	47.00	8.225	0.370	9.398	17.000	75.616	0.240	6.10	0.063	1.60	3.75	MW CG	N
0.72	18.288	71927	0.75	19.050	0.610	15.494	23.00	4.025	0.510	12.954	12.000	53.376	0.220	5.59	0.055	1.40	4.00	MW CG	N
0.72	18.288	71927S	0.75	19.050	0.610	15.494	20.00	3.500	0.400	10.160	7.900	35.139	0.220	5.59	0.055	1.40	4.00	SST CG	N
0.72	18.288	71938	0.75	19.050	0.602	15.291	33.00	5.775	0.440	11.176	14.000	62.272	0.230	5.84	0.059	1.50	3.88	MW CG	N
0.72	18.288	71938S	0.75	19.050	0.602	15.291	28.00	4.900	0.350	8.890	9.700	43.146	0.230	5.84	0.059	1.50	3.88	SST CG	N
0.72	18.288	71952S	0.75	19.050	0.594	15.088	28.00	4.900	0.408	10.363	11.400	50.707	0.285	7.24	0.063	1.59	4.40	SST CG	N
0.72	18.288	71952	0.75	19.050	0.594	15.088	33.00	5.775	0.470	11.938	16.000	71.168	0.280	7.11	0.063	1.60	4.38	MW CG	N
0.72	18.288	71963	0.75	19.050	0.590	14.986	44.00	7.700	0.440	11.176	19.000	84.512	0.270	6.86	0.065	1.65	4.13	MW CG	N
0.72	18.288	71963S	0.75	19.050	0.590	14.986	37.00	6.475	0.350	8.890	13.000	57.824	0.270	6.86	0.065	1.65	4.13	SST CG	N
0.72	18.288	71976	0.75	19.050	0.586	14.884	50.00	8.750	0.420	10.668	21.000	93.408	0.280	7.11	0.067	1.70	4.13	MW CG	N
0.72	18.288	71976S	0.75	19.050	0.586	14.884	43.00	7.525	0.330	8.382	14.000	62.272	0.280	7.11	0.067	1.70	4.13	SST CG	N
0.72	18.288	72097	0.75	19.050	0.528	13.411	23.00	35.525	0.176	4.470	36.000	160.128	0.385	9.78	0.095	2.41	4.10	SST CG	N
0.72	18.288	72097S	0.75	19.050	0.528	13.411	23.00	41.825	0.230	5.842	55.000	244.640	0.400	10.16	0.096	2.44	4.13	MW CG	N
0.72	18.288	72110	0.75	19.050	0.510	12.954	35.00	62.125	0.200	5.080	72.000	320.256	0.430	10.92	0.105	2.67	4.13	MW CG	N
0.72	18.288	72110S	0.75	19.050	0.510	12.954	30.01	52.675	0.160	4.064	47.000	209.056	0.430	10.92	0.105	2.67	4.13	SST CG	N
0.72	18.288	72123	0.75	19.050	0.496	12.598	469.00	82.075	0.180	4.572	83.000	369.184	0.460	11.68	0.112	2.84	4.13	MW CG	N
0.72	18.288	72123S	0.75	19.050	0.496	12.598	398.00	6											




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
0.72	18.288	72058S	0.88 22.352	0.560 14.224	70.00 12.250	0.320 8.128	22.500 100.080	0.380 9.65	0.080 2.03	4.80	SST	CG N
0.72	18.288	72058	0.88 22.352	0.558 14.173	82.00 14.350	0.420 10.668	35.000 155.680	0.390 9.91	0.081 2.06	4.88	MW	CG N
0.72	18.288	72071	0.88 22.352	0.550 13.970	114.00 19.950	0.350 8.890	40.000 177.920	0.390 9.91	0.085 2.16	4.63	MW	CG N
0.72	18.288	72071S	0.88 22.352	0.550 13.970	97.00 16.975	0.280 7.112	27.000 120.096	0.390 9.91	0.085 2.16	4.63	SST	CG N
0.72	18.288	72098S	0.88 22.352	0.528 13.411	165.00 28.875	0.217 5.512	36.000 160.128	0.430 10.92	0.095 2.41	4.50	SST	CG N
0.72	18.288	72098	0.88 22.352	0.528 13.411	194.00 33.950	0.280 7.112	55.000 244.640	0.440 11.18	0.096 2.44	4.63	MW	CG N
0.72	18.288	72111	0.88 22.352	0.510 12.954	286.00 50.050	0.250 6.350	72.000 320.256	0.490 12.45	0.105 2.67	4.63	MW	CG N
0.72	18.288	72111S	0.88 22.352	0.510 12.954	243.00 42.525	0.200 5.080	47.000 209.056	0.490 12.45	0.105 2.67	4.63	SST	CG N
0.72	18.288	72124	0.88 22.352	0.496 12.598	374.00 65.450	0.220 5.588	83.000 369.184	0.530 13.46	0.112 2.84	4.75	MW	CG N
0.72	18.288	72124S	0.88 22.352	0.496 12.598	318.00 55.650	0.170 4.318	54.000 240.192	0.530 13.46	0.112 2.84	4.75	SST	CG N
0.72	18.288	71929	1.00 25.400	0.610 15.494	19.00 3.325	0.630 16.002	12.000 53.376	0.240 6.10	0.055 1.40	4.38	MW	CG N
0.72	18.288	71929S	1.00 25.400	0.610 15.494	16.00 2.800	0.500 12.700	7.900 35.139	0.240 6.10	0.055 1.40	4.38	SST	CG N
0.72	18.288	71940	1.00 25.400	0.602 15.291	24.00 4.200	0.610 15.494	14.000 62.272	0.270 6.86	0.059 1.50	4.63	MW	CG N
0.72	18.288	71940S	1.00 25.400	0.602 15.291	20.00 3.500	0.490 12.446	9.700 43.146	0.270 6.86	0.059 1.50	4.63	SST	CG N
0.72	18.288	71945S	1.00 25.400	0.594 15.088	20.00 3.500	0.572 14.529	11.400 50.707	0.335 8.51	0.063 1.59	5.40	SST	CG N
0.72	18.288	71954	1.00 25.400	0.594 15.088	24.00 4.200	0.660 16.764	16.000 71.168	0.340 8.64	0.063 1.60	5.38	MW	CG N
0.72	18.288	71965	1.00 25.400	0.590 14.986	31.00 5.425	0.620 15.748	19.000 84.512	0.330 8.38	0.065 1.65	5.00	MW	CG N
0.72	18.288	71965S	1.00 25.400	0.590 14.986	26.00 4.550	0.490 12.446	13.000 57.824	0.330 8.38	0.065 1.65	5.00	SST	CG N
0.72	18.288	71978	1.00 25.400	0.586 14.884	33.00 5.775	0.630 16.002	21.000 93.408	0.340 8.64	0.067 1.70	5.13	MW	CG N
0.72	18.288	71978S	1.00 25.400	0.586 14.884	28.00 4.900	0.500 12.700	14.000 62.272	0.340 8.64	0.067 1.70	5.13	SST	CG N
0.72	18.288	71995	1.00 25.400	0.584 14.834	35.00 6.125	0.620 15.748	22.000 97.856	0.350 8.89	0.068 1.73	5.13	MW	CG N
0.72	18.288	71995S	1.00 25.400	0.584 14.834	30.00 5.250	0.490 12.446	15.000 66.720	0.350 8.89	0.068 1.73	5.13	SST	CG N
0.72	18.288	72016	1.00 25.400	0.576 14.630	42.00 7.350	0.590 14.986	25.000 111.200	0.390 9.91	0.072 1.83	5.38	MW	CG N
0.72	18.288	72016S	1.00 25.400	0.576 14.630	36.00 6.300	0.460 11.684	17.000 75.616	0.390 9.91	0.072 1.83	5.38	SST	CG N
0.72	18.288	72033	1.00 25.400	0.560 14.224	65.00 11.375	0.520 13.208	34.000 151.232	0.440 11.18	0.080 2.03	5.50	MW	CG N
0.72	18.288	72034	1.00 25.400	0.560 14.224	108.00 18.900	0.310 7.874	34.000 151.232	0.330 8.38	0.080 2.03	4.13	MW	CG N
0.72	18.288	72033S	1.00 25.400	0.560 14.224	55.00 9.625	0.410 10.414	23.000 102.304	0.440 11.18	0.080 2.03	5.50	SST	CG N
0.72	18.288	72034S	1.00 25.400	0.560 14.224	92.00 16.100	0.250 6.350	23.000 102.304	0.330 8.38	0.080 2.03	4.13	SST	CG N
0.72	18.288	72059	1.00 25.400	0.558 14.173	71.00 12.425	0.490 12.446	35.000 155.680	0.440 11.18	0.081 2.06	5.38	MW	CG N
0.72	18.288	72059S	1.00 25.400	0.558 14.173	60.00 10.500	0.401 10.185	24.000 106.752	0.461 11.71	0.082 2.08	5.60	SST	CG N
0.72	18.288	72072	1.00 25.400	0.550 13.970	97.00 16.975	0.410 10.414	40.000 177.920	0.430 10.92	0.085 2.16	5.00	MW	CG N
0.72	18.288	72072S	1.00 25.400	0.550 13.970	82.00 14.350	0.330 8.382	27.000 120.096	0.430 10.92	0.085 2.16	5.00	SST	CG N
0.72	18.288	72099	1.00 25.400	0.528 13.411	165.00 28.875	0.330 8.382	55.000 244.640	0.480 12.19	0.095 2.41	5.00	MW	CG N
0.72	18.288	72099S	1.00 25.400	0.528 13.411	140.00 24.500	0.260 6.604	37.000 164.576	0.480 12.19	0.096 2.44	5.00	SST	CG N
0.72	18.288	72112	1.00 25.400	0.510 12.954	243.00 42.525	0.300 7.620	72.000 320.256	0.540 13.72	0.105 2.67	5.13	MW	CG N
0.72	18.288	72112S	1.00 25.400	0.510 12.954	206.00 36.050	0.230 5.842	47.000 209.056	0.540 13.72	0.105 2.67	5.13	SST	CG N
0.72	18.288	72125	1.00 25.400	0.496 12.598	315.00 55.125	0.260 6.604	83.000 369.184	0.590 14.99	0.112 2.84	5.25	MW	CG N
0.72	18.288	72125S	1.00 25.400	0.496 12.598	268.00 46.900	0.200 5.080	54.000 240.192	0.590 14.99	0.112 2.84	5.25	SST	CG N
0.72	18.288	71930	1.25 31.750	0.610 15.494	15.00 2.625	0.800 20.320	12.000 53.376	0.280 7.11	0.055 1.40	5.13	MW	CG N
0.72	18.288	71930S	1.25 31.750	0.610 15.494	12.00 2.100	0.640 16.256	7.900 35.139	0.280 7.11	0.055 1.40	5.13	SST	CG N
0.72	18.288	71941	1.25 31.750	0.602 15.291	18.00 3.150	0.780 19.812	14.000 62.272	0.310 7.87	0.059 1.50	5.25	MW	CG N
0.72	18.288	71941S	1.25 31.750	0.602 15.291	16.00 2.800	0.630 16.002	9.700 43.146	0.310 7.87	0.059 1.50	5.25	SST	CG N
0.72	18.288	71955	1.25 31.750	0.594 15.088	16.00 2.800	0.715 18.161	11.400 50.707	0.387 9.83	0.063 1.59	6.20	SST	CG N
0.72	18.288	71955S	1.25 31.750	0.594 15.088	19.00 3.325	0.860 21.844	16.000 71.168	0.390 9.91	0.063 1.60	6.25	MW	CG N
0.72	18.288	71966	1.25 31.750	0.590 14.986	24.00 4.200	0.790 20.066	19.000 84.512	0.370 9.40	0.065 1.65	5.75	MW	CG N
0.72	18.288	71966S	1.25 31.750	0.590 14.986	21.00 3.675	0.630 16.002	13.000 57.824	0.370 9.40	0.065 1.65	5.75	SST	CG N
0.72	18.288	71979	1.25 31.750	0.586 14.884	27.00 4.725	0.770 19.558	21.000 93.408	0.390 9.91	0.067 1.70	5.88	MW	CG N
0.72	18.288	71979S	1.25 31.750	0.586 14.884	23.00 4.025	0.620 15.748	14.000 62.272	0.390 9.91	0.067 1.70	5.88	SST	CG N
0.72	18.288	71997	1.25 31.750	0.584 14.834	28.00 4.900	0.790 20.066	22.000 97.856	0.410 10.41	0.068 1.73	6.00	MW	CG N
0.72	18.288	71997S	1.25 31.750	0.584 14.834	23.00 4.025	0.630 16.002	15.000 66.720	0.410 10.41	0.068 1.73	6.00	SST	CG N
0.72	18.288	72017	1.25 31.750	0.576 14.630	34.00 5.950	0.730 18.542	25.000 111.200	0.440 11.18	0.072 1.83	6.13	MW	CG N
0.72	18.288	72017S	1.25 31.750	0.576 14.630	29.00 5.075	0.570 14.478	17.000 75.616	0.440 11.18	0.072 1.83	6.13	SST	CG N
0.72	18.288	72036	1.25 31.750	0.560 14.224	50.00 8.750	0.680 17.272	34.000 151.232	0.520 13.21	0.080 2.03	6.50	MW	CG N
0.72	18.288	72037	1.25 31.750	0.560 14.224	83.00 14.525	0.410 10.414	34.000 151.232	0.380 9.65	0.080 2.03	4.75	MW	CG N
0.72	18.288	72036S	1.25 31.750	0.560 14.224	42.00 7.350	0.530 13.462	23.000 102.304	0.520 13.21	0.080 2.03	6.50	SST	CG N
0.72	18.288	72037S	1.25 31.750	0.560 14.224	70.00 12.250	0.320 8.128	23.000 102.304	0.380 9.65	0.080 2.03	4.75	SST	CG N
0.72	18.288	72060	1.25 31.750	0.558 14.173	54.00 9.450	0.640 16.256	35.000 155.680	0.520 13.21	0.081 2.06	6.38	MW	CG N
0.72	18.288	72060S	1.25 31.750	0.558 14.173	46.00 8.050	0.523 13.284	24.000 106.752	0.552 14.02	0.082 2.08	6.70	SST	CG N
0.72	18.288	72073	1.25 31.750	0.550 13.970	75.00 13.125	0.540 13.716	40.000 177.920	0.500 12.70	0.085 2.16	5.88	MW	CG N
0.72	18.288	72073S	1.25 31.750	0.550 13.970	63.00 11.025	0.430 10.922	27.000 120.096	0.500 12.70	0.085 2.16	5.88	SST	CG N
0.72	18.288	72100S	1.25 31.750	0.528 13.411	107.00 18.725	0.334 8.484	36.000 160.128	0.560 14.22	0.095 2.41	5.90	SST	CG N
0.72	18.288	72100	1.25 31.750	0.528 13.411	126.00 22.050	0.440 11.176	55.000 244.640	0.580 14.73	0.096 2.44	6.00		




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.72	18.288	72039	1.50	38.100	0.560	14.224	41.00	7.175	0.830	21.082	34.000	151.232	0.600	15.24	0.080	2.03	7.50	MW CG N
0.72	18.288	72040	1.50	38.100	0.560	14.224	67.00	11.725	0.500	12.700	34.000	151.232	0.430	10.92	0.080	2.03	5.38	MW CG N
0.72	18.288	72039S	1.50	38.100	0.560	14.224	34.00	5.950	0.660	16.764	23.000	102.304	0.600	15.24	0.080	2.03	7.50	SST CG N
0.72	18.288	72040S	1.50	38.100	0.560	14.224	57.00	9.975	0.400	10.160	23.000	102.304	0.430	10.92	0.080	2.03	5.38	SST CG N
0.72	18.288	72061	1.50	38.100	0.558	14.173	44.00	7.700	0.790	20.066	35.000	155.680	0.600	15.24	0.081	2.06	7.38	MW CG N
0.72	18.288	72061S	1.50	38.100	0.558	14.173	38.00	6.650	0.633	16.078	24.000	106.752	0.634	16.10	0.082	2.08	7.70	SST CG N
0.72	18.288	72074	1.50	38.100	0.550	13.970	61.00	10.675	0.660	16.764	40.000	177.920	0.580	14.73	0.085	2.16	6.88	MW CG N
0.72	18.288	72074S	1.50	38.100	0.550	13.970	51.00	8.925	0.520	13.208	27.000	120.096	0.580	14.73	0.085	2.16	6.88	SST CG N
0.72	18.288	72101S	1.50	38.100	0.528	13.411	87.00	15.225	0.411	10.439	36.000	160.128	0.645	16.38	0.095	2.41	6.80	SST CG N
0.72	18.288	72101	1.50	38.100	0.528	13.411	102.00	17.850	0.540	13.716	55.000	244.640	0.660	16.76	0.096	2.44	6.88	MW CG N
0.72	18.288	72114	1.50	38.100	0.510	12.954	149.00	26.075	0.480	12.192	72.000	320.256	0.740	18.80	0.105	2.67	7.00	MW CG N
0.72	18.288	72114S	1.50	38.100	0.510	12.954	126.00	22.050	0.380	9.652	47.000	209.056	0.740	18.80	0.105	2.67	7.00	SST CG N
0.72	18.288	72127	1.50	38.100	0.496	12.598	192.00	33.600	0.440	11.176	83.000	369.184	0.810	20.57	0.112	2.84	7.25	MW CG N
0.72	18.288	72127S	1.50	38.100	0.496	12.598	163.00	28.525	0.330	8.382	54.000	240.192	0.810	20.57	0.112	2.84	7.25	SST CG N
0.72	18.288	71932	1.75	44.450	0.610	15.494	9.10	1.593	1.300	33.020	12.000	53.376	0.380	9.65	0.055	1.40	6.88	SST CG N
0.72	18.288	71932S	1.75	44.450	0.610	15.494	7.70	1.348	1.000	25.400	7.900	35.139	0.380	9.65	0.055	1.40	6.88	SST CG N
0.72	18.288	71943	1.75	44.450	0.602	15.291	13.00	2.275	1.100	27.940	14.000	62.272	0.400	10.16	0.059	1.50	6.75	MW CG N
0.72	18.288	71943S	1.75	44.450	0.602	15.291	11.00	1.925	0.900	22.860	9.700	43.146	0.400	10.16	0.059	1.50	6.75	SST CG N
0.72	18.288	71957S	1.75	44.450	0.594	15.088	11.00	1.925	1.039	26.391	11.400	50.707	0.501	12.73	0.063	1.59	8.10	SST CG N
0.72	18.288	71957	1.75	44.450	0.594	15.088	13.00	2.275	1.200	30.480	16.000	71.168	0.510	12.95	0.063	1.60	8.13	MW CG N
0.72	18.288	71968	1.75	44.450	0.590	14.986	17.00	2.975	1.200	30.480	19.000	84.512	0.490	12.45	0.065	1.65	7.50	MW CG N
0.72	18.288	71968S	1.75	44.450	0.590	14.986	14.00	2.450	0.920	23.368	13.000	57.824	0.490	12.45	0.065	1.65	7.50	SST CG N
0.72	18.288	71981	1.75	44.450	0.586	14.884	18.00	3.150	1.200	30.480	21.000	93.408	0.520	13.21	0.067	1.70	7.75	MW CG N
0.72	18.288	71981S	1.75	44.450	0.586	14.884	15.00	2.625	0.930	23.622	14.000	62.272	0.520	13.21	0.067	1.70	7.75	SST CG N
0.72	18.288	72001	1.75	44.450	0.584	14.834	19.00	3.325	1.100	27.940	22.000	97.856	0.540	13.72	0.068	1.73	7.88	MW CG N
0.72	18.288	72001S	1.75	44.450	0.584	14.834	16.00	2.800	0.920	23.368	15.000	66.720	0.540	13.72	0.068	1.73	7.88	SST CG N
0.72	18.288	72019	1.75	44.450	0.576	14.630	22.00	3.850	1.100	27.940	25.000	111.200	0.610	15.49	0.072	1.83	8.50	MW CG N
0.72	18.288	72019S	1.75	44.450	0.576	14.630	19.00	3.325	0.890	22.606	17.000	75.616	0.610	15.49	0.072	1.83	8.50	SST CG N
0.72	18.288	72042	1.75	44.450	0.560	14.224	34.00	5.950	0.980	24.892	34.000	151.232	0.690	17.53	0.080	2.03	8.63	MW CG N
0.72	18.288	72042S	1.75	44.450	0.560	14.224	29.00	5.075	0.780	19.812	23.000	102.304	0.690	17.53	0.080	2.03	8.63	SST CG N
0.72	18.288	72062	1.75	44.450	0.558	14.173	37.00	6.475	0.930	23.622	35.000	155.680	0.680	17.27	0.081	2.06	8.38	MW CG N
0.72	18.288	72062S	1.75	44.450	0.558	14.173	32.00	5.600	0.752	19.101	24.000	106.752	0.722	18.34	0.082	2.08	8.80	SST CG N
0.72	18.288	72075	1.75	44.450	0.550	13.970	51.00	8.925	0.790	20.066	40.000	177.920	0.660	16.76	0.085	2.16	7.75	MW CG N
0.72	18.288	72075S	1.75	44.450	0.550	13.970	43.00	7.525	0.620	15.748	27.000	120.096	0.660	16.76	0.085	2.16	7.75	SST CG N
0.72	18.288	72084	1.75	44.450	0.538	13.665	56.00	9.800	0.840	21.336	47.000	209.056	0.820	20.83	0.091	2.31	9.00	MW CG N
0.72	18.288	72084S	1.75	44.450	0.538	13.665	48.00	8.400	0.650	16.510	31.000	137.888	0.820	20.83	0.091	2.31	9.00	SST CG N
0.72	18.288	72102S	1.75	44.450	0.528	13.411	73.00	12.775	0.490	12.446	36.000	160.128	0.733	18.62	0.095	2.41	7.70	SST CG N
0.72	18.288	72102	1.75	44.450	0.528	13.411	86.00	15.050	0.650	16.510	55.000	244.640	0.760	19.30	0.096	2.44	7.88	MW CG N
0.72	18.288	72115	1.75	44.450	0.510	12.954	124.00	21.700	0.580	14.732	72.000	320.256	0.840	21.34	0.105	2.67	8.00	MW CG N
0.72	18.288	72115S	1.75	44.450	0.510	12.954	106.00	18.550	0.450	11.430	47.000	209.056	0.840	21.34	0.105	2.67	8.00	SST CG N
0.72	18.288	72128	1.75	44.450	0.496	12.598	160.00	28.000	0.520	13.208	83.000	369.184	0.920	23.37	0.112	2.84	8.25	MW CG N
0.72	18.288	72128S	1.75	44.450	0.496	12.598	136.00	23.800	0.400	10.160	54.000	240.192	0.920	23.37	0.112	2.84	8.25	SST CG N
0.72	18.288	71933	2.00	50.800	0.610	15.494	8.50	1.488	1.400	35.560	12.000	53.376	0.400	10.16	0.055	1.40	7.25	MW CG N
0.72	18.288	71933S	2.00	50.800	0.610	15.494	7.20	1.260	1.100	27.940	7.900	35.139	0.400	10.16	0.055	1.40	7.25	SST CG N
0.72	18.288	71944	2.00	50.800	0.602	15.291	11.00	1.925	1.300	33.020	14.000	62.272	0.440	11.18	0.059	1.50	7.50	MW CG N
0.72	18.288	71944S	2.00	50.800	0.602	15.291	9.40	1.645	1.000	25.400	9.700	43.146	0.440	11.18	0.059	1.50	7.50	SST CG N
0.72	18.288	71958S	2.00	50.800	0.594	15.088	9.40	1.645	1.216	30.886	11.400	50.707	0.571	14.50	0.063	1.59	9.10	SST CG N
0.72	18.288	71958	2.00	50.800	0.594	15.088	11.00	1.925	1.400	35.560	16.000	55.000	0.580	14.73	0.063	1.60	9.25	MW CG N
0.72	18.288	71969	2.00	50.800	0.590	14.986	14.00	2.450	1.300	33.020	19.000	84.512	0.540	13.72	0.065	1.65	8.38	MW CG N
0.72	18.288	71969S	2.00	50.800	0.590	14.986	12.00	2.100	1.100	27.940	13.000	57.824	0.540	13.72	0.065	1.65	8.38	SST CG N
0.72	18.288	71982	2.00	50.800	0.586	14.884	16.00	2.275	1.100	27.940	14.000	62.272	0.590	14.99	0.067	1.70	8.75	SST CG N
0.72	18.288	71982S	2.00	50.800	0.586	14.884	13.00	2.275	1.100	27.940	14.000	62.272	0.590	14.99	0.067	1.70	8.75	MW CG N
0.72	18.288	72003	2.00	50.800	0.584	14.834	16.00	2.437	0.900	22.860	23.000	102.304	0.770	19.56	0.080	2.03	9.63	SST CG N
0.72	18.288	72003S	2.00	50.800	0.584	14.834	14.00	2.450	1.100	27.940	15.000	66.720	0.600	15.24	0.068	1.73	8.75	SST CG N
0.72	18.288	72020	2.00	50.800	0.576	14.630	20.00	3.500	1.200	30.480	25.00							




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
0.72	18.288	72005	2.25 57.150	0.584 14.834	15.00 2.625	1.500 38.100	22.000 97.856	0.650 16.51	0.068 1.73	9.63	MW	CG N
0.72	18.288	72005	2.25 57.150	0.584 14.834	12.00 2.100	1.200 30.480	15.000 66.720	0.650 16.51	0.068 1.73	9.63	SST	CG N
0.72	18.288	72021	2.25 57.150	0.576 14.630	18.00 3.150	1.400 35.560	25.000 111.200	0.710 18.03	0.072 1.83	9.88	MW	CG N
0.72	18.288	72021S	2.25 57.150	0.576 14.630	15.00 2.625	1.100 27.940	17.000 75.616	0.710 18.03	0.072 1.83	9.88	SST	CG N
0.72	18.288	72046	2.25 57.150	0.560 14.224	26.00 4.550	1.300 33.020	34.000 151.232	0.850 21.59	0.080 2.03	10.60	MW	CG N
0.72	18.288	72046S	2.25 57.150	0.560 14.224	22.00 3.850	1.000 25.400	23.000 102.304	0.850 21.59	0.080 2.03	10.60	SST	CG N
0.72	18.288	72064	2.25 57.150	0.558 14.173	28.00 4.900	1.200 30.480	35.000 155.680	0.840 21.34	0.081 2.06	10.40	MW	CG N
0.72	18.288	72064S	2.25 57.150	0.558 14.173	24.00 4.200	1.020 25.908	24.000 106.752	0.908 23.06	0.082 2.08	11.10	SST	CG N
0.72	18.288	72077	2.25 57.150	0.550 13.970	39.00 6.825	1.000 25.400	40.000 177.920	0.820 20.83	0.085 2.16	9.63	MW	CG N
0.72	18.288	72077S	2.25 57.150	0.550 13.970	33.00 5.775	0.820 20.828	27.000 120.096	0.820 20.83	0.085 2.16	9.63	SST	CG N
0.72	18.288	72088	2.25 57.150	0.538 13.665	43.00 7.525	1.100 27.940	47.000 209.056	1.020 25.91	0.091 2.31	11.30	MW	CG N
0.72	18.288	72088S	2.25 57.150	0.538 13.665	36.00 6.300	0.860 21.844	31.000 137.888	1.020 25.91	0.091 2.31	11.30	SST	CG N
0.72	18.288	72104S	2.25 57.150	0.528 13.411	55.00 9.625	0.650 16.510	36.000 160.128	0.910 23.11	0.095 2.41	9.60	SST	CG N
0.72	18.288	72104	2.25 57.150	0.528 13.411	65.00 11.375	0.850 21.590	55.000 244.640	0.940 23.88	0.096 2.44	9.75	MW	CG N
0.72	18.288	72117	2.25 57.150	0.510 12.954	94.00 16.450	0.760 19.304	72.000 320.256	1.050 26.67	0.105 2.67	10.00	MW	CG N
0.72	18.288	72117S	2.25 57.150	0.510 12.954	80.00 14.000	0.590 14.986	47.000 209.056	1.050 26.67	0.105 2.67	10.00	SST	CG N
0.72	18.288	72130	2.25 57.150	0.496 12.598	121.00 21.175	0.690 17.526	83.000 369.184	1.160 29.46	0.112 2.84	10.40	MW	CG N
0.72	18.288	72130S	2.25 57.150	0.496 12.598	103.00 18.025	0.530 13.462	54.000 240.192	1.160 29.46	0.112 2.84	10.40	SST	CG N
0.72	18.288	71935	2.50 63.500	0.610 15.494	6.80 1.190	1.700 43.180	12.000 53.376	0.470 11.94	0.055 1.40	8.63	MW	CG N
0.72	18.288	71935S	2.50 63.500	0.610 15.494	5.70 0.998	1.400 35.560	7.900 35.139	0.470 11.94	0.055 1.40	8.63	SST	CG N
0.72	18.288	71946	2.50 63.500	0.602 15.291	8.70 1.523	1.600 40.640	14.000 62.272	0.520 13.21	0.059 1.50	9.00	MW	CG N
0.72	18.288	71946S	2.50 63.500	0.602 15.291	7.40 1.295	1.300 33.020	9.700 43.146	0.520 13.21	0.059 1.50	8.88	SST	CG N
0.72	18.288	71960S	2.50 63.500	0.594 15.088	8.40 1.470	1.361 34.569	11.400 50.707	0.624 15.85	0.063 1.59	10.00	SST	CG N
0.72	18.288	71960	2.50 63.500	0.594 15.088	9.90 1.733	1.800 45.720	17.000 75.616	0.640 16.26	0.063 1.60	10.10	MW	CG N
0.72	18.288	71971	2.50 63.500	0.590 14.986	11.00 1.925	1.700 43.180	19.000 84.512	0.660 16.76	0.065 1.65	10.10	MW	CG N
0.72	18.288	71971S	2.50 63.500	0.590 14.986	9.60 1.680	1.400 35.560	13.000 57.824	0.660 16.76	0.065 1.65	10.10	SST	CG N
0.72	18.288	71984	2.50 63.500	0.586 14.884	14.00 2.450	1.500 38.100	21.000 93.408	0.650 16.51	0.067 1.70	9.75	MW	CG N
0.72	18.288	71984S	2.50 63.500	0.586 14.884	11.00 1.925	1.200 30.480	14.000 62.272	0.650 16.51	0.067 1.70	9.75	SST	CG N
0.72	18.288	72007	2.50 63.500	0.584 14.834	13.00 2.275	1.700 43.180	22.000 97.856	0.710 18.03	0.068 1.73	10.50	MW	CG N
0.72	18.288	72007S	2.50 63.500	0.584 14.834	11.00 1.925	1.300 33.020	15.000 66.720	0.710 18.03	0.068 1.73	10.50	SST	CG N
0.72	18.288	72022	2.50 63.500	0.576 14.630	16.00 2.800	1.500 38.100	25.000 111.200	0.780 19.81	0.072 1.83	10.90	MW	CG N
0.72	18.288	72022S	2.50 63.500	0.576 14.630	14.00 2.450	1.200 30.480	17.000 75.616	0.780 19.81	0.072 1.83	10.90	SST	CG N
0.72	18.288	72048	2.50 63.500	0.560 14.224	23.00 4.025	1.500 38.100	34.000 151.232	0.930 23.62	0.080 2.03	11.60	MW	CG N
0.72	18.288	72048S	2.50 63.500	0.560 14.224	20.00 3.500	1.100 27.940	23.000 102.304	0.930 23.62	0.080 2.03	11.60	SST	CG N
0.72	18.288	72065	2.50 63.500	0.558 14.173	25.00 4.375	1.400 35.560	35.000 155.680	0.920 23.37	0.081 2.06	11.40	MW	CG N
0.72	18.288	72065S	2.50 63.500	0.558 14.173	21.00 3.675	1.145 29.083	24.000 106.752	1.014 25.76	0.082 2.08	12.40	SST	CG N
0.72	18.288	72078	2.50 63.500	0.550 13.970	35.00 6.125	1.200 30.480	40.000 177.920	0.890 22.61	0.085 2.16	10.50	MW	CG N
0.72	18.288	72078S	2.50 63.500	0.550 13.970	29.00 5.075	0.920 23.368	27.000 120.096	0.890 22.61	0.085 2.16	10.50	SST	CG N
0.72	18.288	72090	2.50 63.500	0.538 13.665	38.00 6.650	1.200 30.480	47.000 209.056	1.130 28.70	0.091 2.31	12.40	MW	CG N
0.72	18.288	72090S	2.50 63.500	0.538 13.665	32.00 5.600	0.970 24.638	31.000 137.888	1.130 28.70	0.091 2.31	12.40	SST	CG N
0.72	18.288	72105S	2.50 63.500	0.528 13.411	49.00 8.575	0.730 18.542	36.000 160.128	0.999 25.37	0.095 2.41	10.50	SST	CG N
0.72	18.288	72105	2.50 63.500	0.528 13.411	58.00 10.150	0.960 24.384	55.000 244.640	1.030 26.16	0.096 2.44	10.80	MW	CG N
0.72	18.288	72118	2.50 63.500	0.510 12.954	84.00 14.700	0.860 21.844	72.000 320.256	1.160 29.46	0.105 2.67	11.00	MW	CG N
0.72	18.288	72118S	2.50 63.500	0.510 12.954	71.00 12.425	0.670 17.018	47.000 209.056	1.160 29.46	0.105 2.67	11.00	SST	CG N
0.72	18.288	72131	2.50 63.500	0.496 12.598	107.00 18.725	0.780 19.812	83.000 369.184	1.270 32.26	0.112 2.84	11.40	MW	CG N
0.72	18.288	72131S	2.50 63.500	0.496 12.598	91.00 15.925	0.600 15.240	54.000 240.192	1.270 32.26	0.112 2.84	11.40	SST	CG N
0.72	18.288	71936	2.75 69.850	0.610 15.494	6.20 1.085	1.900 48.260	12.000 53.376	0.510 12.95	0.055 1.40	9.25	MW	CG N
0.72	18.288	71936S	2.75 69.850	0.610 15.494	5.20 0.910	1.500 38.100	7.900 35.139	0.510 12.95	0.055 1.40	9.25	SST	CG N
0.72	18.288	71948	2.75 69.850	0.602 15.291	7.20 1.260	2.000 50.800	14.000 62.272	0.610 15.49	0.059 1.50	10.40	MW	CG N
0.72	18.288	71948S	2.75 69.850	0.602 15.291	6.10 1.068	1.600 40.640	9.700 43.146	0.610 15.49	0.059 1.50	10.40	SST	CG N
0.72	18.288	71961S	2.75 69.850	0.594 15.088	7.60 1.330	1.504 38.202	11.400 50.707	0.677 17.20	0.063 1.59	10.80	SST	CG N
0.72	18.288	71961	2.75 69.850	0.594 15.088	8.90 1.558	2.000 50.800	17.000 75.616	0.690 17.53	0.063 1.60	11.00	MW	CG N
0.72	18.288	71972	2.75 69.850	0.590 14.986	10.00 1.750	1.900 48.260	19.000 84.512	0.720 18.29	0.065 1.65	11.10	MW	CG N
0.72	18.288	71972S	2.75 69.850	0.590 14.986	8.50 1.488	1.500 38.100	13.000 57.824	0.720 18.29	0.065 1.65	11.10	SST	CG N
0.72	18.288	72009	2.75 69.850	0.584 14.834	12.00 2.100	1.900 48.260	22.000 97.856	0.780 19.81	0.068 1.73	11.50	MW	CG N
0.72	18.288	72009S	2.75 69.850	0.584 14.834	9.90 1.733	1.500 38.100	15.000 66.720	0.780 19.81	0.068 1.73	11.50	SST	CG N
0.72	18.288	72023	2.75 69.850	0.576 14.630	15.00 2.625	1.700 43.180	25.000 111.200	0.840 21.34	0.072 1.83	11.60	MW	CG N
0.72	18.288	72023S	2.75 69.850	0.576 14.630	12.00 2.100	1.300 33.020	17.000 75.616	0.840 21.34	0.072 1.83	11.60	SST	CG N
0.72	18.288	72050	2.75 69.850	0.560 14.224	21.00 3.675	1.600 40.640	34.000 151.232	1.020 25.91	0.080 2.03	12.80	MW	CG N
0.72	18.288	72050S	2.75 69.850	0.560 14.224	18.00 3.150	1.300 33.020	23.000 102.304	1.020 25.91	0.080 2.03	12.80	SST	CG N
0.72	18.288	72066	2.75 69.850	0.558 14.173	23.00 4.025	1.500 38.100	35.000 155.680	1.000 25.40	0.081 2.06	12.40	MW	CG N
0.72	18.288	72066S	2.75 69.850	0.558 14.173	19.00 3.325	1.266 32.156	24.000 10					




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
0.72	18.288	71985	3.00 76.200	0.586 14.884	11.00 1.925	2.000 50.800	21.000 93.408	0.800 20.32	0.067 1.70	11.90	MW CG	N
0.72	18.288	71985S	3.00 76.200	0.586 14.884	8.90 1.558	1.600 40.640	14.000 62.272	0.800 20.32	0.067 1.70	11.90	SST CG	N
0.72	18.288	72011	3.00 76.200	0.584 14.834	11.00 1.925	2.000 50.800	22.000 97.856	0.840 21.34	0.068 1.73	12.40	MW CG	N
0.72	18.288	72011S	3.00 76.200	0.584 14.834	9.10 1.593	1.600 40.640	15.000 66.720	0.840 21.34	0.068 1.73	12.40	SST CG	N
0.72	18.288	72024	3.00 76.200	0.576 14.630	13.00 2.275	1.900 48.260	25.000 111.200	0.910 23.11	0.072 1.83	12.60	MW CG	N
0.72	18.288	72024S	3.00 76.200	0.576 14.630	11.30 1.978	1.500 38.100	17.000 75.616	0.910 23.11	0.072 1.83	12.60	SST CG	N
0.72	18.288	72052	3.00 76.200	0.560 14.224	19.00 3.325	1.800 45.720	34.000 151.232	1.100 27.94	0.080 2.03	13.80	MW CG	N
0.72	18.288	72052S	3.00 76.200	0.560 14.224	16.00 2.800	1.400 35.560	23.000 102.304	1.100 27.94	0.080 2.03	13.80	SST CG	N
0.72	18.288	72067	3.00 76.200	0.558 14.173	21.00 3.675	1.700 43.180	35.000 155.680	1.080 27.43	0.081 2.06	13.40	MW CG	N
0.72	18.288	72067S	3.00 76.200	0.558 14.173	18.00 3.150	1.336 33.934	24.000 106.752	1.155 29.34	0.082 2.08	14.10	SST CG	N
0.72	18.288	72080	3.00 76.200	0.550 13.970	28.00 4.900	1.400 35.560	40.000 177.920	1.040 26.42	0.085 2.16	12.30	MW CG	N
0.72	18.288	72080S	3.00 76.200	0.550 13.970	24.00 4.200	1.100 27.940	27.000 120.096	0.940 26.42	0.085 2.16	12.30	SST CG	N
0.72	18.288	72094	3.00 76.200	0.538 13.665	31.00 5.425	1.500 38.100	47.000 209.056	1.330 33.78	0.091 2.31	14.60	MW CG	N
0.72	18.288	72094S	3.00 76.200	0.538 13.665	27.00 4.725	1.200 30.480	31.000 137.888	1.330 33.78	0.091 2.31	14.60	SST CG	N
0.72	18.288	72107S	3.00 76.200	0.528 13.411	40.00 7.000	0.894 22.708	36.000 160.128	1.180 29.97	0.095 2.41	12.40	SST CG	N
0.72	18.288	72107	3.00 76.200	0.528 13.411	47.00 8.225	1.200 30.480	55.000 244.640	1.210 30.73	0.096 2.44	12.60	MW CG	N
0.72	18.288	72120	3.00 76.200	0.510 12.954	69.00 12.075	1.000 25.400	72.000 320.256	1.350 34.29	0.105 2.67	12.90	MW CG	N
0.72	18.288	72120S	3.00 76.200	0.510 12.954	58.00 10.150	0.810 20.574	47.000 209.056	1.350 34.29	0.105 2.67	12.90	SST CG	N
0.72	18.288	72133	3.00 76.200	0.496 12.598	88.00 15.400	0.950 24.130	83.000 369.184	1.500 38.10	0.112 2.84	13.40	MW CG	N
0.72	18.288	72133S	3.00 76.200	0.496 12.598	75.00 13.125	0.730 18.542	54.000 240.192	1.500 38.10	0.112 2.84	13.40	SST CG	N
0.72	18.288	71986	3.25 82.550	0.586 14.884	9.20 1.610	2.300 58.420	21.000 93.408	0.890 22.61	0.067 1.70	13.30	MW CG	N
0.72	18.288	71988	3.25 82.550	0.586 14.884	11.00 1.925	2.000 50.800	21.000 93.408	0.790 20.07	0.067 1.70	11.80	MW CG	N
0.72	18.288	71986S	3.25 82.550	0.586 14.884	7.80 1.365	1.800 45.720	14.000 62.272	0.890 22.61	0.067 1.70	13.30	SST CG	N
0.72	18.288	71988S	3.25 82.550	0.586 14.884	9.10 1.593	1.600 40.640	14.000 62.272	0.790 20.07	0.067 1.70	11.80	SST CG	N
0.72	18.288	72025	3.25 82.550	0.576 14.630	13.00 2.275	1.900 48.260	25.000 111.200	0.930 23.62	0.072 1.83	12.90	MW CG	N
0.72	18.288	72025S	3.25 82.550	0.576 14.630	11.00 1.925	1.500 38.100	17.000 75.616	0.930 23.62	0.072 1.83	12.90	SST CG	N
0.72	18.288	71975	3.50 88.900	0.590 14.986	7.80 1.365	2.500 63.500	19.000 84.512	0.890 22.61	0.065 1.65	13.80	MW CG	N
0.72	18.288	71975S	3.50 88.900	0.590 14.986	6.60 1.155	2.000 50.800	13.000 57.824	0.890 22.61	0.065 1.65	13.80	SST CG	N
0.72	18.288	71987	3.50 88.900	0.586 14.884	8.50 1.488	2.500 63.500	21.000 93.408	0.950 24.13	0.067 1.70	14.30	MW CG	N
0.72	18.288	71989	3.50 88.900	0.586 14.884	10.00 1.750	2.100 53.340	21.000 93.408	0.830 21.08	0.067 1.70	12.40	MW CG	N
0.72	18.288	71987S	3.50 88.900	0.586 14.884	7.20 1.260	2.000 50.800	14.000 62.272	0.950 24.13	0.067 1.70	14.30	SST CG	N
0.72	18.288	71989S	3.50 88.900	0.586 14.884	8.50 1.488	1.700 43.180	14.000 62.272	0.830 21.08	0.067 1.70	12.40	SST CG	N
0.72	18.288	72013	3.50 88.900	0.584 14.834	9.10 1.593	2.400 60.960	22.000 97.856	0.960 24.38	0.068 1.73	14.10	MW CG	N
0.72	18.288	72013S	3.50 88.900	0.584 14.834	7.70 1.348	1.900 48.260	15.000 66.720	0.960 24.38	0.068 1.73	14.10	SST CG	N
0.72	18.288	72026	3.50 88.900	0.576 14.630	11.00 1.925	2.200 55.880	25.000 111.200	1.050 26.67	0.072 1.83	14.60	MW CG	N
0.72	18.288	72026S	3.50 88.900	0.576 14.630	9.60 1.680	1.700 43.180	17.000 75.616	1.050 26.67	0.072 1.83	14.60	SST CG	N
0.72	18.288	72054	3.50 88.900	0.560 14.224	16.00 2.800	2.100 53.340	34.000 151.232	1.260 32.00	0.080 2.03	15.80	MW CG	N
0.72	18.288	72054S	3.50 88.900	0.560 14.224	14.00 2.450	1.600 40.640	23.000 102.304	1.260 32.00	0.080 2.03	15.80	SST CG	N
0.72	18.288	72068	3.50 88.900	0.558 14.173	18.00 3.150	2.000 50.800	35.000 155.680	1.260 32.00	0.081 2.06	15.50	MW CG	N
0.72	18.288	72068S	3.50 88.900	0.558 14.173	15.00 2.625	1.604 40.742	24.000 106.752	1.354 34.39	0.082 2.08	16.50	SST CG	N
0.72	18.288	72081	3.50 88.900	0.550 13.970	24.00 4.200	1.700 43.180	40.000 177.920	1.200 30.48	0.085 2.16	14.10	MW CG	N
0.72	18.288	72081S	3.50 88.900	0.550 13.970	21.00 3.675	1.300 33.020	27.000 120.096	1.200 30.48	0.085 2.16	14.10	SST CG	N
0.72	18.288	72096	3.50 88.900	0.538 13.665	27.00 4.725	1.800 45.720	47.000 209.056	1.540 39.12	0.091 2.31	16.90	MW CG	N
0.72	18.288	72096S	3.50 88.900	0.538 13.665	23.00 4.025	1.400 35.560	31.000 137.888	1.540 39.12	0.091 2.31	16.90	SST CG	N
0.72	18.288	72108S	3.50 88.900	0.528 13.411	34.00 5.950	1.052 26.721	36.000 160.128	1.355 34.42	0.095 2.41	14.30	SST CG	N
0.72	18.288	72108	3.50 88.900	0.528 13.411	40.00 7.000	1.400 35.560	55.000 244.640	1.390 35.31	0.096 2.44	14.50	MW CG	N
0.72	18.288	72121	3.50 88.900	0.510 12.954	58.00 10.150	1.200 30.480	72.000 320.256	1.560 39.62	0.105 2.67	14.90	MW CG	N
0.72	18.288	72121S	3.50 88.900	0.510 12.954	49.00 8.575	0.960 24.384	47.000 209.056	1.560 39.62	0.105 2.67	14.90	SST CG	N
0.72	18.288	72134	3.50 88.900	0.496 12.598	75.00 13.125	1.100 27.940	83.000 369.184	1.740 44.20	0.112 2.84	15.50	MW CG	N
0.72	18.288	72134S	3.50 88.900	0.496 12.598	63.00 11.025	0.860 21.844	54.000 240.192	1.740 44.20	0.112 2.84	15.50	SST CG	N
0.72	18.288	72027	4.00 101.600	0.576 14.630	9.90 1.733	2.500 63.500	25.000 111.200	1.180 29.97	0.072 1.83	16.40	MW CG	N
0.72	18.288	72027S	4.00 101.600	0.576 14.630	8.40 1.470	2.000 50.800	17.000 75.616	1.180 29.97	0.072 1.83	16.40	SST CG	N
0.72	18.288	72056	4.00 101.600	0.560 14.224	14.00 2.450	2.400 40.960	34.000 151.232	1.430 36.32	0.080 2.03	17.90	MW CG	N
0.72	18.288	72056S	4.00 101.600	0.560 14.224	12.00 2.100	1.900 48.260	23.000 102.304	1.430 36.32	0.080 2.03	17.90	SST CG	N
0.72	18.288	72069	4.00 101.600	0.558 14.173	15.00 2.625	2.300 58.420	35.000 155.680	1.420 36.07	0.081 2.06	17.50	MW CG	N
0.72	18.288	72069S	4.00 101.600	0.558 14.173	13.00 2.275	1.850 46.990	24.000 106.752	1.537 39.04	0.082 2.08	18.70	SST CG	N
0.72	18.288	72082	4.00 101.600	0.550 13.970	21.00 3.675	1.900 48.260	40.000 177.920	1.360 34.54	0.085 2.16	16.00	MW CG	N
0.72	18.288	72082S	4.00 101.600	0.550 13.970	18.00 3.150	1.500 38.100	27.000 120.096	1.360 34.54	0.085 2.16	16.00	SST CG	N
0.72	18.288	72109	4.00 101.600	0.528 13.411	35.00 6.125	1.600 40.640	55.000 244.640	1.570 39.88	0.096 2.44	16.40	MW CG	N
0.72	18.288	72109S	4.00 101.600	0.528 13.411	32.00 5.600	1.200 30.480	37.000 164.576	1.570 39.88	0.097 2.46	16.40	SST CG	N
0.72	18.288	72122	4.00 101.600	0.510 12.954	51.00 8.925	1.400 35.560	72.000 320.256	1.770 44.96	0.105 2.67	16.90	MW CG	N
0.72	18.288	72122S	4.00 101.600	0.510 12.954	43.00 7.525	1.100 27.940	47.000 209.056	1.770 44.96				




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
0.734	18.644	S-1343	0.88 22.352	0.574 14.580	46.00 8.050	0.400 10.160	18.000 80.064	0.480 12.19	0.080 2.03	6.00	SST	CG N
0.734	18.644	V-26	0.94 23.876	0.650 16.510	4.50 0.788	0.690 17.526	3.100 13.789	0.250 6.35	0.042 1.07	5.00	SPR	C GI
0.734	18.644	S-310	1.00 25.400	0.600 15.240	28.00 4.900	0.490 12.446	14.000 62.272	0.340 8.64	0.067 1.70	5.00	SST	CG N
0.734	18.644	3796	1.00 25.400	0.590 14.986	44.00 7.700	0.390 9.906	17.000 75.616	0.360 9.14	0.072 1.83	5.00	HD	CG GI
0.734	18.644	S-340	1.09 27.686	0.380 9.652	2069.00 362.075	0.090 2.286	180.000 800.640	0.970 24.64	0.177 4.50	5.50	SST	CG N
0.734	18.644	S-1373	1.13 28.702	0.508 12.903	213.00 37.275	0.260 6.604	55.000 244.640	0.790 20.07	0.113 2.87	6.00	SST	CG N
0.734	18.644	S-403	1.16 29.464	0.636 16.154	4.40 0.770	0.810 20.574	3.500 15.568	0.350 8.89	0.049 1.24	7.00	SST	CG N
0.734	18.644	11820	1.19 30.226	0.562 14.275	72.00 12.600	0.400 10.160	29.000 128.992	0.520 13.21	0.086 2.18	6.00	SPR	CG Z
0.734	18.644	S-263	1.19 30.226	0.494 12.548	228.00 39.900	0.290 7.366	65.000 289.120	0.840 21.34	0.120 3.05	7.00	SST	CG N
0.734	18.644	11704	1.22 30.988	0.654 16.612	3.10 0.543	0.960 24.384	3.000 13.344	0.260 6.60	0.040 1.02	5.50	SPR	C Z
0.734	18.644	11549	1.31 33.274	0.634 16.104	5.60 0.980	0.910 23.114	5.100 22.685	0.400 10.16	0.050 1.27	7.00	SPR	C Z
0.734	18.644	A11-55	1.31 33.274	0.604 15.342	8.40 1.470	0.600 15.240	5.000 22.240	0.720 18.29	0.065 1.65	11.00	SST	CG N
0.734	18.644	3740	1.31 33.274	0.534 13.564	107.00 18.725	0.410 10.414	44.000 195.712	0.730 18.54	0.100 2.54	7.25	SPR	CG Z
0.734	18.644	10517	1.38 35.052	0.642 16.307	6.60 1.155	1.100 27.940	7.200 32.026	0.230 5.84	0.046 1.17	5.00	MW	CG N
0.734	18.644	11186	1.38 35.052	0.570 14.478	41.00 7.175	0.620 15.748	25.000 111.200	0.640 16.26	0.082 2.08	7.75	SPR	CG Z
0.734	18.644	2668	1.41 35.814	0.626 15.900	8.40 1.470	0.930 23.622	7.800 34.694	0.410 10.41	0.054 1.37	7.00	SPR	C Z
0.734	18.644	10671	1.47 37.338	0.656 16.662	1.40 0.245	1.100 27.940	1.500 6.672	0.400 10.16	0.039 0.99	9.25	SPR	C N
0.734	18.644	S-51	1.50 38.100	0.646 16.408	3.20 0.560	1.200 30.480	3.700 16.458	0.330 8.38	0.044 1.12	6.50	SST	C N
0.734	18.644	10080	1.50 38.100	0.624 15.850	12.00 2.100	0.690 17.526	8.200 36.474	0.300 7.62	0.055 1.40	5.50	SPR	CG GI
0.734	18.644	S-330	1.50 38.100	0.622 15.799	8.80 1.540	0.930 23.622	8.200 36.474	0.420 10.67	0.056 1.42	6.50	SST	C N
0.734	18.644	B14-53	1.50 38.100	0.614 15.596	13.00 2.275	0.740 18.796	10.000 44.480	0.360 9.14	0.060 1.52	6.00	SST	CG N
0.734	18.644	11554	1.50 38.100	0.574 14.580	35.00 6.125	0.670 17.018	24.000 106.752	0.720 18.29	0.080 2.03	8.00	SPR	CG Z
0.734	18.644	4351	1.50 38.100	0.570 14.478	39.00 6.825	0.650 16.510	25.000 111.200	0.660 16.76	0.082 2.08	8.00	SPR	CG Z
0.734	18.644	3436	1.50 38.100	0.410 10.414	1058.00 185.150	0.150 3.810	159.000 707.232	1.130 28.70	0.162 4.11	7.00	SPR	CG Z
0.734	18.644	12046	1.59 40.386	0.524 13.310	83.00 14.525	0.490 12.446	41.000 182.368	1.200 27.94	0.105 2.67	10.50	SPR	CG Z
0.734	18.644	O-67	1.63 41.402	0.652 16.561	1.10 0.193	1.100 27.940	1.200 5.338	0.490 12.45	0.041 1.04	12.00	SST	CG N
0.734	18.644	S-96	1.63 41.402	0.652 16.561	2.20 0.385	1.300 33.020	2.900 12.899	0.320 8.13	0.041 1.04	6.75	SST	C N
0.734	18.644	12102	1.66 42.164	0.652 16.561	2.40 0.420	1.400 35.560	3.300 14.678	0.270 6.86	0.041 1.04	6.50	SST	CG N
0.734	18.644	10810	1.66 42.164	0.548 13.919	54.00 9.450	0.650 16.510	35.000 155.680	0.880 22.35	0.093 2.36	9.50	SPR	CG N
0.734	18.644	S-1636	1.72 43.688	0.652 16.561	1.10 0.193	1.200 30.480	1.300 5.782	0.490 12.45	0.041 1.04	12.00	SST	CG N
0.734	18.644	4237	1.75 44.450	0.646 16.408	3.30 0.578	1.400 35.560	4.600 20.461	0.350 8.89	0.044 1.12	7.00	SPR	C N
0.734	18.644	2893	1.75 44.450	0.606 15.392	11.00 1.925	1.100 27.940	13.000 57.824	0.580 14.73	0.064 1.63	9.00	SPR	CG Z
0.734	18.644	A-42	1.75 44.450	0.584 14.834	26.00 4.550	0.740 18.796	20.000 88.960	0.600 15.24	0.075 1.91	8.00	SPR	CG N
0.734	18.644	S-248	1.91 48.514	0.550 13.970	35.00 6.125	0.800 20.320	28.000 124.544	1.100 27.94	0.092 2.34	12.00	SST	CG N
0.734	18.644	S-417	2.00 50.800	0.552 14.021	33.00 5.775	0.920 23.368	31.000 137.888	1.060 26.92	0.091 2.31	11.80	SST	CG N
0.734	18.644	10530	2.06 52.324	0.590 14.986	16.00 2.800	1.100 27.940	17.000 75.616	0.830 21.08	0.072 1.83	10.50	SPR	C Z
0.734	18.644	11693	2.09 53.086	0.610 15.494	7.60 1.330	1.400 35.560	11.000 48.928	0.700 17.78	0.062 1.57	11.30	SPR	CG Z
0.734	18.644	10981	2.19 55.626	0.590 14.986	15.00 2.625	1.100 27.940	16.000 71.168	0.720 18.29	0.072 1.83	10.00	SST	CG N
0.734	18.644	S-493	2.34 59.436	0.532 13.513	53.00 9.275	0.761 19.329	40.000 177.920	1.126 28.60	0.100 2.54	11.30	SST	CG N
0.734	18.644	10871	2.44 61.976	0.558 14.173	36.00 6.300	0.880 22.352	31.000 137.888	0.970 24.64	0.088 2.24	11.00	SPR	CG N
0.734	18.644	10886	2.50 63.500	0.614 15.596	6.10 1.068	1.800 45.720	11.000 48.928	0.720 18.29	0.060 1.52	12.00	SPR	CG Z
0.734	18.644	1663	2.63 66.802	0.574 14.580	16.00 2.800	1.300 33.020	22.000 97.856	1.280 32.51	0.080 2.03	15.00	SPR	C Z
0.734	18.644	S-1224	2.69 68.326	0.626 15.900	2.80 0.490	1.900 48.260	5.400 24.019	0.760 19.30	0.054 1.37	14.00	SST	CG N
0.734	18.644	3365	2.75 69.850	0.610 15.494	7.00 1.225	1.700 43.180	12.000 53.376	0.810 20.57	0.062 1.57	12.00	SPR	C GI
0.734	18.644	S-1503	2.94 74.676	0.646 16.408	0.85 0.149	2.100 53.340	1.800 8.006	0.830 21.08	0.044 1.12	18.80	SST	CG N
0.734	18.644	2747	2.94 74.676	0.464 11.786	185.00 32.375	0.530 13.462	97.000 431.456	1.890 48.01	0.135 3.43	14.00	SPR	C Z
0.734	18.644	11333	3.00 76.200	0.578 14.681	18.00 3.150	1.200 30.480	22.000 97.856	1.030 26.16	0.078 1.98	12.30	HD	C Z
0.734	18.644	B18-181	3.00 76.200	0.554 14.072	17.00 2.975	1.200 30.480	21.000 93.408	1.800 45.72	0.090 2.29	20.00	SST	CG N
0.734	18.644	B11-44	3.25 82.550	0.622 15.799	6.50 1.138	1.300 33.020	8.700 38.698	0.560 14.22	0.056 1.42	9.00	SPR	C N
0.734	18.644	3753	3.50 88.900	0.650 16.510	1.60 0.280	2.500 63.500	4.000 17.792	0.480 12.19	0.042 1.07	10.50	SPR	C Z
0.734	18.644	4126	3.50 88.900	0.640 16.256	1.60 0.280	2.700 68.580	4.400 19.571	0.780 19.81	0.047 1.19	15.50	HD	C Z
0.734	18.644	12723	3.50 88.900	0.616 15.646	4.00 0.700	2.600 66.040	10.000 44.480	0.940 23.88	0.059 1.50	16.00	MW	CG GI
0.734	18.644	4190	3.50 88.900	0.604 15.342	9.50 0.663	1.400 35.560	14.000 62.272	0.720 18.29	0.065 1.65	11.00	SPR	CG Z
0.734	18.644	1555	3.50 88.900	0.590 14.986	10.00 1.750	1.700 43.180	17.000 75.616	1.150 29.21	0.072 1.83	15.00	SPR	C Z
0.734	18.644	S-1430	3.56 90.424	0.574 14.580	8.30 1.453	1.600 40.640	13.000 57.824	2.000 50.80	0.080 2.03	24.00	SST	C N
0.734	18.644	3876	3.69 93.726	0.584 14.834	11.00 1.925	1.800 45.720	20.000 88.960	1.280 32.51	0.075 1.91	17.00	SPR	CG Z
0.734	18.644	11937	4.63 117.602	0.538 13.665	25.00 4.375	1.700 43.180	41.000 182.368	2.250 57.15	0.098 2.49	23.00	SPR	C Z
0.734	18.644	11540	5.00 127.000	0.614 15.596	3.60 0.630	3.000 76.200	11.000 48.928	1.200 30.48	0.060 1.52	19.00	SPR	C Z
0.734	18.644	11392	6.13 155.702	0.484 12.294	55.00 9.625	1.500 38.100	81.000 360.288	3.750 95.25	0.125 3.18	30.00	SPR	CG Z
0.734	18.644	11885	6.31 160.274	0.528 13.411	23.00 4.025	2.000 50.800	48.000 213.504	3.040 77.22	0.103 2.62	29.50	SPR	CG N
0.734	18.644	12609	6.38 162.052	0.708 17.983	0.55 0.096	2.000 50.800	112.000 498.176	3.750 95.25	0.013 0.33	30.00	MW	C N
0.734	18.644	4158	11.50 292.100	0.534 13.564	13.00 2.275	2.300 83.820	44.000 195.712	4.600 116.84	0.100 2.54	45.00	SPR</td	




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish							
0.75	19.050	2590	0.89	22.606	0.590	14.986	39.00	6.825	0.330	8.382	13.000	57.824	0.560	14.22	0.080	2.03	7.00	HD CG	Z
0.75	19.050	12584	0.91	23.114	0.510	12.954	397.00	69.475	0.180	4.572	70.000	311.360	0.600	15.24	0.120	3.05	5.00	SPR CG	N
0.75	19.050	N-137	0.94	23.876	0.672	17.069	2.30	0.403	0.700	17.780	1.600	7.117	0.230	5.84	0.039	0.99	6.00	SPR CG	C
0.75	19.050	B15-40	0.94	23.876	0.658	16.713	6.70	1.173	0.720	18.288	4.800	21.350	0.220	5.59	0.046	1.17	4.75	SPR CG	Z
0.75	19.050	B1-65	0.94	23.876	0.624	15.850	25.00	4.375	0.440	11.176	11.000	48.928	0.272	6.91	0.063	1.59	4.30	SST CG	N
0.75	19.050	3033	0.94	23.876	0.540	13.716	326.00	57.050	0.150	3.810	49.000	217.952	0.420	10.67	0.105	2.67	4.00	SPR CG	Z
0.75	19.050	2602	0.97	24.638	0.646	16.408	7.30	1.278	0.640	16.256	4.700	20.906	0.330	8.38	0.052	1.32	6.25	HD CG	Z
0.75	19.050	S-3115	1.00	25.400	0.668	16.967	5.00	0.875	0.680	17.272	3.400	15.123	0.210	5.33	0.041	1.04	4.00	SST CG	N
0.75	19.050	11493	1.00	25.400	0.642	16.307	18.00	3.150	0.420	10.668	7.600	33.805	0.270	6.86	0.054	1.37	4.00	SPR CG	Z
0.75	19.050	WW-70	1.00	25.400	0.638	16.205	21.00	3.675	0.400	10.160	8.500	37.808	0.280	7.11	0.056	1.42	4.00	SPR CG	Z
0.75	19.050	3957	1.00	25.400	0.626	15.900	14.00	2.450	0.580	14.732	8.000	35.584	0.420	10.67	0.062	1.57	6.75	SPR CG	Z
0.75	19.050	S-976	1.00	25.400	0.624	15.850	27.00	4.725	0.407	10.338	11.000	48.928	0.261	6.63	0.063	1.59	4.20	SST CG	N
0.75	19.050	10577	1.00	25.400	0.608	15.443	39.00	6.825	0.420	10.668	16.000	71.168	0.430	10.92	0.071	1.80	5.00	SPR CG	Z
0.75	19.050	889	1.00	25.400	0.590	14.986	59.00	10.325	0.390	9.906	23.000	102.304	0.510	12.95	0.080	2.03	5.33	HD CG	Z
0.75	19.050	3318	1.00	25.400	0.540	13.716	217.00	37.975	0.230	5.842	49.000	217.952	0.530	13.46	0.105	2.67	5.00	SPR CG	Z
0.75	19.050	3827	1.00	25.400	0.536	13.614	236.00	41.300	0.220	5.588	52.000	231.296	0.540	13.72	0.107	2.72	5.00	SPR CG	N
0.75	19.050	KK-55	1.00	25.400	0.530	13.462	203.00	35.525	0.250	6.350	50.000	222.400	0.610	15.49	0.110	2.79	5.50	SST CG	N
0.75	19.050	S-344	1.00	25.400	0.510	12.954	346.00	60.550	0.190	4.826	64.000	284.672	0.600	15.24	0.120	3.05	5.00	SST CG	N
0.75	19.050	S-307	1.00	25.400	0.500	12.700	357.00	62.475	0.200	5.080	72.000	320.256	0.690	17.53	0.125	3.18	5.50	SST CG	N
0.75	19.050	S-1259	1.03	26.162	0.626	15.900	14.00	2.450	0.643	16.332	9.000	40.032	0.387	9.83	0.063	1.59	6.20	SST CG	N
0.75	19.050	S-884	1.03	26.162	0.538	13.665	201.00	35.175	0.224	5.690	45.000	200.160	0.506	12.85	0.105	2.67	4.80	SPR CG	Z
0.75	19.050	B1-67	1.09	27.686	0.640	16.256	14.00	2.450	0.570	14.478	8.100	36.029	0.260	6.60	0.055	1.40	4.75	SPR CG	N
0.75	19.050	B8-39	1.09	27.686	0.570	14.478	94.00	16.450	0.340	8.636	31.000	137.888	0.500	12.70	0.090	2.29	5.50	SPR CG	Z
0.75	19.050	S-948	1.11	28.194	0.510	12.954	352.00	61.600	0.180	4.572	64.000	284.672	0.600	15.24	0.120	3.05	5.00	SST CG	N
0.75	19.050	12248	1.13	28.702	0.644	16.358	11.00	1.925	0.650	16.510	7.200	32.026	0.270	6.86	0.053	1.35	5.00	SPR CG	Z
0.75	19.050	11371	1.13	28.702	0.608	15.443	15.00	2.625	0.490	12.446	7.200	32.026	0.640	16.26	0.071	1.80	9.00	SST CG	N
0.75	19.050	B17-183	1.13	28.702	0.590	14.986	44.00	7.700	0.530	13.462	23.000	102.304	0.520	13.21	0.080	2.03	6.50	SPR CG	Z
0.75	19.050	HH-72	1.13	28.702	0.550	13.970	88.00	15.400	0.400	10.160	35.000	155.680	0.730	18.54	0.100	2.54	7.25	SST CG	N
0.75	19.050	3479	1.13	28.702	0.500	12.700	479.00	83.825	0.160	4.064	79.000	351.392	0.630	16.00	0.125	3.18	5.00	HD CG	Z
0.75	19.050	11701	1.13	28.702	0.496	12.598	387.00	67.725	0.210	5.334	83.000	369.184	0.760	19.30	0.127	3.23	6.00	SPR CG	Z
0.75	19.050	S-1448	1.13	28.702	0.480	12.192	446.00	78.050	0.190	4.826	86.000	382.528	0.810	20.57	0.135	3.43	6.00	SST CG	N
0.75	19.050	B17-121	1.16	29.464	0.620	15.748	23.00	4.025	0.580	14.732	13.000	57.824	0.360	9.14	0.065	1.65	5.50	SPR CG	N
0.75	19.050	10933	1.19	30.226	0.626	15.900	16.00	2.800	0.710	18.034	12.000	53.376	0.430	10.92	0.062	1.57	6.00	SPR CG	C
0.75	19.050	HH-7	1.19	30.226	0.570	14.478	73.00	12.775	0.400	10.160	29.000	128.992	0.540	13.72	0.090	2.29	6.00	SST CG	N
0.75	19.050	S-1537	1.19	30.226	0.514	13.056	192.00	33.600	0.320	8.128	61.000	271.328	0.830	21.08	0.118	3.00	7.00	SST CG	N
0.75	19.050	12198	1.22	30.988	0.570	14.478	55.00	9.625	0.500	12.700	27.000	120.096	0.720	18.29	0.090	2.29	8.00	SPR CG	Z
0.75	19.050	S-392	1.25	31.750	0.626	15.900	16.00	2.800	0.687	17.450	11.000	48.928	0.417	10.59	0.063	1.59	5.70	SST CG	Z
0.75	19.050	S-1287	1.25	31.750	0.616	15.646	23.00	4.025	0.600	15.240	14.000	62.272	0.370	9.40	0.067	1.70	5.50	SST CG	Z
0.75	19.050	EE-73	1.25	31.750	0.590	14.986	36.00	6.300	0.650	16.510	23.000	102.304	0.600	15.24	0.080	2.03	7.50	SPR CG	Z
0.75	19.050	KK-72	1.25	31.750	0.530	13.462	146.00	25.550	0.370	9.398	55.000	244.640	0.830	21.08	0.110	2.79	7.50	SPR CG	N
0.75	19.050	B1-69	1.28	32.512	0.614	15.596	28.00	4.900	0.550	13.970	15.000	66.720	0.370	9.40	0.068	1.73	5.50	SPR CG	N
0.75	19.050	S-1634	1.31	33.274	0.688	17.475	1.10	0.193	1.200	30.480	1.200	5.338	0.160	4.06	0.031	0.79	5.00	SST CG	N
0.75	19.050	4284	1.31	33.274	0.616	15.646	19.00	3.325	0.760	19.304	14.000	62.272	0.450	11.43	0.067	1.70	6.75	SPR CG	Z
0.75	19.050	12259	1.31	33.274	0.616	15.646	18.00	3.150	0.800	20.320	14.000	62.272	0.470	11.94	0.067	1.70	7.00	SST CG	Z
0.75	19.050	11798	1.34	34.036	0.652	16.561	6.00	1.050	1.000	25.400	6.000	26.688	0.340	8.64	0.049	1.24	6.00	SPR CG	N
0.75	19.050	12230	1.34	34.036	0.608	15.443	26.00	4.550	0.630	16.002	16.000	71.168	0.460	11.68	0.071	1.80	6.50	SPR CG	Z
0.75	19.050	12224	1.38	35.052	0.650	16.510	6.50	1.138	0.930	23.622	6.100	27.133	0.300	7.62	0.050	1.27	6.00	SPR CG	Z
0.75	19.050	S-439	1.38	35.052	0.640	16.256	7.70	1.348	0.980	24.892	7.600	33.805	0.360	9.14	0.055	1.40	6.50	SST CG	N
0.75	19.050	3064	1.38	35.052	0.256	6.502	12936.00	22638.00	0.030	0.762	427.000	1899.296	1.300	33.02	0.247	6.27	5.25	SPR CG	Z
0.75	19.050	A11-64	1.41	35.814	0.648	16.459	6.30	1.103	0.960	24.384	6.100	27.133	0.310	7.87	0.051	1.30	6.00	SST CG	N
0.75	19.050	B7-51	1.41	35.814	0.640	16.256	10.00	1.750	0.770	19.558	8.100	36.029	0.320	8.13	0.055	1.40	5.90	SPR CG	Z
0.75	19.050	B18-173	1.44	36.576	0.630	16.002	13.00	2.275	0.780	19.812	9.800	43.590	0.360	9.14	0.060	1.52	6.00	SST CG	Z
0.75	19.050	3824	1.44	36.576	0.626	15.900	16.00	2.800	0.710	18.034	12.000	53.376	0.370	9.40	0.062	1.57	6.00	HD CG	Z
0.75	19.050	11516	1.50	38.100	0.682	17.323	0.87	0.152	1.200	30.480	1.000	4.448	0.310	7.87	0.034	0.86	8.0		




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
0.75	19.050	12228	2.00	50.800	0.654	16.612	3.20	0.560	1.500	38.100	4.800	21.350	0.480	12.19	0.048	1.22	9.00	SPR	C	Z
0.75	19.050	10735	2.00	50.800	0.640	16.256	4.90	0.858	1.500	38.100	7.100	31.581	0.550	13.97	0.055	1.40	10.00	SPR	CG	Z
0.75	19.050	10226	2.00	50.800	0.626	15.900	10.00	1.750	1.100	27.940	12.000	53.376	0.530	13.46	0.062	1.57	8.50	SPR	C	Z
0.75	19.050	S-779	2.00	50.800	0.624	15.850	11.00	1.925	1.000	25.400	11.000	48.928	0.521	13.23	0.063	1.59	7.30	SST	C	N
0.75	19.050	S-782	2.00	50.800	0.606	15.392	17.00	2.975	0.960	24.384	16.000	71.168	0.680	17.27	0.072	1.83	8.50	SST	C	N
0.75	19.050	66	2.00	50.800	0.590	14.986	25.00	4.375	0.920	23.368	23.000	102.304	0.780	19.81	0.080	2.03	9.75	HD	CG	Z
0.75	19.050	11280	2.09	53.086	0.540	13.716	72.00	12.600	0.680	17.272	49.000	217.952	1.160	29.46	0.105	2.67	11.00	SPR	CG	Z
0.75	19.050	S-1353	2.13	54.102	0.662	16.815	1.70	0.298	1.600	40.640	2.700	12.010	0.480	12.19	0.044	1.12	10.00	SST	C	N
0.75	19.050	11394	2.13	54.102	0.606	15.392	12.00	2.100	1.300	33.020	16.000	71.168	0.860	21.84	0.072	1.83	12.00	SPR	CG	Z
0.75	19.050	S-3228	2.13	54.102	0.592	15.037	19.00	3.325	1.100	27.940	21.000	93.408	0.830	21.08	0.079	2.01	10.50	SST	CG	N
0.75	19.050	12070	2.13	54.102	0.582	14.783	81.00	14.175	0.330	8.382	27.000	120.096	0.420	10.67	0.084	2.13	5.00	SPR	CG	Z
0.75	19.050	S-1036	2.13	54.102	0.558	14.173	40.00	7.000	0.861	21.869	34.000	151.232	1.051	26.70	0.095	2.41	11.10	SST	CG	N
0.75	19.050	S-415	2.19	55.626	0.624	15.850	9.20	1.610	1.195	30.353	11.000	48.928	0.524	13.31	0.063	1.59	8.40	SST	CG	N
0.75	19.050	S-1583	2.19	55.626	0.540	13.716	83.00	14.525	0.550	13.970	46.000	204.608	0.950	24.13	0.105	2.67	9.00	SST	CG	N
0.75	19.050	S-1418	2.25	57.150	0.656	16.662	2.70	0.473	1.900	48.260	5.000	22.240	0.400	10.16	0.047	1.19	8.50	SST	CG	N
0.75	19.050	10344	2.31	58.674	0.540	13.716	65.00	11.375	0.760	19.304	49.000	217.952	1.260	32.00	0.105	2.67	12.00	SPR	CG	Z
0.75	19.050	B10-70	2.34	59.436	0.642	16.307	6.00	1.050	1.300	33.020	7.600	33.805	0.430	10.92	0.054	1.37	8.00	SPR	CG	N
0.75	19.050	A13-29	2.38	60.452	0.640	16.256	5.80	1.015	1.300	33.020	7.600	33.805	0.440	11.18	0.055	1.40	8.00	SST	CG	N
0.75	19.050	12254	2.38	60.452	0.630	16.002	5.70	0.998	1.700	43.180	9.400	41.811	0.720	18.29	0.060	1.52	12.00	SPR	CG	Z
0.75	19.050	11920	2.41	61.214	0.674	17.120	0.74	0.130	2.000	50.800	1.400	6.227	0.460	11.68	0.038	0.97	12.00	SST	CG	N
0.75	19.050	S-490	2.50	63.500	0.680	17.272	0.29	0.051	1.800	45.720	0.500	2.224	0.740	18.80	0.035	0.89	20.00	SST	C	N
0.75	19.050	11875	2.50	63.500	0.672	17.069	0.77	0.135	2.000	50.800	1.500	6.672	0.550	13.97	0.039	0.99	14.00	SPR	CG	N
0.75	19.050	RR-53	2.50	63.500	0.670	17.018	0.75	0.131	1.900	48.260	1.400	6.227	0.600	15.24	0.040	1.02	14.00	SST	C	N
0.75	19.050	S-1271	2.50	63.500	0.626	15.900	7.60	1.330	1.447	36.754	11.000	48.928	0.670	17.02	0.063	1.59	9.70	SST	C	N
0.75	19.050	S-783	2.50	63.500	0.606	15.392	13.00	2.275	1.200	30.480	16.000	71.168	0.810	20.57	0.072	1.83	10.30	SST	C	N
0.75	19.050	11758	2.50	63.500	0.542	13.767	59.00	10.325	0.810	20.574	48.000	213.504	1.400	35.56	0.104	2.64	12.50	SPR	C	Z
0.75	19.050	48	2.50	63.500	0.540	13.716	59.00	10.325	0.830	21.082	49.000	217.952	1.370	34.80	0.105	2.67	13.00	HD	CG	Z
0.75	19.050	50	2.50	63.500	0.480	12.192	195.00	34.125	0.490	12.446	96.000	427.008	1.690	42.93	0.135	3.43	12.50	HD	CG	Z
0.75	19.050	12451	2.59	65.786	0.536	13.614	81.00	14.175	0.640	16.256	52.000	231.296	1.150	29.21	0.107	2.72	10.80	SPR	CG	N
0.75	19.050	3472	2.63	66.802	0.550	13.970	50.00	8.750	0.860	21.844	43.000	191.264	1.350	34.29	0.100	2.54	12.50	SPR	C	Z
0.75	19.050	1873	2.69	68.326	0.590	14.986	15.00	2.625	1.400	35.560	21.000	93.408	1.280	32.51	0.080	2.03	15.00	HD	C	Z
0.75	19.050	4362	2.69	68.326	0.540	13.716	55.00	9.625	0.890	22.606	49.000	217.952	1.440	36.58	0.105	2.67	13.80	SPR	CG	Z
0.75	19.050	12199	2.75	69.850	0.640	16.256	4.40	0.770	1.900	48.260	8.100	36.029	0.660	16.76	0.055	1.40	11.00	SPR	C	Z
0.75	19.050	3959	2.75	69.850	0.580	14.732	26.00	4.550	1.100	27.940	28.000	124.544	1.020	25.91	0.085	2.16	12.00	SPR	CG	Z
0.75	19.050	12079	2.78	70.612	0.616	15.646	8.30	1.453	1.800	45.720	14.000	62.272	0.870	22.10	0.067	1.70	13.00	SPR	CG	GI
0.75	19.050	12696	2.81	71.374	0.678	17.221	0.72	0.126	2.400	60.960	1.700	7.562	0.400	10.16	0.036	0.91	10.00	SST	C	N
0.75	19.050	10602	3.00	76.200	0.654	16.612	2.80	0.490	2.100	53.340	5.800	25.798	0.530	13.46	0.048	1.22	10.00	SPR	C	Z
0.75	19.050	S-316	3.00	76.200	0.648	16.459	1.80	0.315	2.100	53.340	3.800	16.902	0.870	22.10	0.051	1.30	16.00	SST	C	N
0.75	19.050	S-888	3.00	76.200	0.626	15.900	5.20	0.910	2.114	53.696	11.000	48.928	0.831	21.11	0.063	1.59	13.30	SST	CG	N
0.75	19.050	4219	3.00	76.200	0.624	15.850	7.00	1.225	1.700	43.180	12.000	53.376	0.820	20.83	0.063	1.60	12.00	SPR	C	Z
0.75	19.050	4255	3.00	76.200	0.540	13.716	54.00	9.450	0.910	23.114	49.000	217.952	1.580	40.13	0.105	2.67	14.00	SPR	C	Z
0.75	19.050	44	3.13	79.502	0.568	14.427	25.00	4.375	1.300	33.020	32.000	142.336	1.520	38.61	0.091	2.31	15.80	HD	C	Z
0.75	19.050	11467	3.25	82.550	0.580	14.732	16.00	2.800	1.700	43.180	27.000	120.096	1.550	39.37	0.085	2.16	18.30	SPR	CG	Z
0.75	19.050	831	3.25	82.550	0.540	13.716	44.00	7.700	1.100	27.940	49.000	217.952	1.860	47.24	0.105	2.67	16.80	HD	C	Z
0.75	19.050	3869	3.25	82.550	0.500	12.700	82.00	14.350	0.810	20.574	67.000	298.016	2.440	61.98	0.125	3.18	19.50	SPR	CG	Z
0.75	19.050	10084	3.38	85.852	0.638	16.205	3.30	0.578	2.500	63.500	8.500	37.808	0.830	21.08	0.056	1.42	14.80	SPR	CG	GI
0.75	19.050	11377	3.47	88.138	0.626	15.900	5.50	0.963	1.999	50.775	11.000	48.928	0.855	21.72	0.063	1.59	12.70	SST	C	N
0.75	19.050	10061	3.50	88.900	0.642	16.307	3.50	0.613	2.200	55.880	7.600	33.805	0.680	17.27	0.054	1.37	12.50	SPR	CG	GI
0.75	19.050	890	3.50	88.900	0.590	14.986	14.00	2.450	1.700	43.180	23.000	102.304	1.380	35.05	0.080	2.03	16.30	HD	C	Z
0.75	19.050	11406	3.50	88.900	0.590	14.986	12.00	2.100	1.800	45.720	22.000	97.856	1.400	35.56	0.080	2.03	16.50	SST	C	N
0.75	19.050	40	3.50	88.900	0.568	14.427	22.00	3.850	1.500	38.100	32.000	142.336	1.680	42.67	0.091	2.31	17.50	HD	C	Z
0.75	19.050	1863	3.50	88.900	0.554	14.072	31.00	5.425	1.300	33.020	40.000	177.920	1.810	45.97	0.098	2.49	17.50	SPR	C	Z
0.75	19.050	12306	3.50	88.900	0.520	13.208	65.00	11.375												




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.75	19.050	11545	7.50	190.500	0.568	14.427	8.80	1.540	3.700	93.980	32.000	142.336	3.820	97.03	0.091	2.31	41.00	SPR CG Z
0.75	19.050	2905	7.56	192.024	0.558	14.173	15.00	2.625	2.500	63.500	38.000	169.024	2.980	75.69	0.096	2.44	31.00	SPR CG Z
0.75	19.050	11845	8.31	211.074	0.506	12.852	31.00	5.425	2.066	52.476	64.000	284.672	4.253	108.03	0.120	3.05	35.00	SST CG N
0.75	19.050	11427	10.00	254.000	0.540	13.716	11.00	1.925	4.200	106.680	45.000	200.160	5.830	148.08	0.105	2.67	55.50	SST CG N
0.75	19.050	11855	10.20	259.080	0.540	13.716	12.00	2.100	4.100	104.140	49.000	217.952	5.880	149.35	0.105	2.67	56.00	SPR CG N
0.75	19.050	3126	11.40	289.560	0.553	14.046	11.00	1.925	3.800	96.520	41.000	182.368	4.340	110.24	0.098	2.49	44.80	SPR CG Z
0.75	19.050	288	12.00	304.800	0.626	15.900	1.50	0.263	7.500	190.500	12.000	53.376	2.820	71.63	0.062	1.57	44.50	HD C Z
0.75	19.050	879	12.00	304.800	0.606	15.392	2.60	0.455	6.600	167.640	17.000	75.616	3.670	93.22	0.072	1.83	50.00	HD C Z
0.75	19.050	877	12.00	304.800	0.590	14.986	3.80	0.665	6.200	157.480	23.000	102.304	4.400	111.76	0.080	2.03	54.00	HD C Z
0.75	19.050	S-3035	13.40	340.360	0.540	13.716	8.00	1.400	5.700	144.780	46.000	204.608	7.670	194.82	0.105	2.67	73.00	SST CG N
0.75	19.050	3042	13.80	350.520	0.540	13.716	12.00	2.100	4.200	106.680	49.000	217.952	6.200	157.48	0.105	2.67	58.00	SPR C Z
0.765	19.431	12602	0.56	14.224	0.701	17.805	3.10	0.543	0.430	10.922	1.300	5.782	0.140	3.56	0.032	0.81	3.25	MW C Z
0.765	19.431	10443	0.63	16.002	0.709	18.009	1.10	0.193	0.490	12.446	0.540	2.402	0.140	3.56	0.028	0.71	4.00	MW C Z
0.765	19.431	S-454	0.63	16.002	0.689	17.501	2.40	0.420	0.440	11.176	1.000	4.448	0.190	4.83	0.038	0.97	5.00	SST CG N
0.765	19.431	10925	0.63	16.002	0.555	14.097	27.00	47.250	0.170	4.318	45.000	200.160	0.420	10.67	0.015	2.67	4.00	SST CG N
0.765	19.431	12244	0.66	16.764	0.701	17.805	1.30	0.228	0.460	11.684	0.590	2.624	0.190	4.83	0.032	0.81	5.00	SPR C Z
0.765	19.431	S-873	0.81	20.574	0.703	17.856	1.60	0.280	0.690	17.526	1.100	4.893	0.120	3.05	0.031	0.79	4.00	SST CG N
0.765	19.431	1589	0.88	22.352	0.681	17.297	4.30	0.753	0.630	16.002	2.700	12.010	0.240	6.10	0.042	1.07	4.75	SPR C Z
0.765	19.431	UU-70	0.88	22.352	0.621	15.773	34.00	5.950	0.460	11.684	16.000	71.168	0.360	9.14	0.072	1.83	5.00	SST CG N
0.765	19.431	12577	0.91	23.114	0.565	14.351	244.00	42.700	0.240	6.096	59.000	262.432	0.400	10.16	0.100	2.54	4.00	MW CG N
0.765	19.431	XX-61	1.00	25.400	0.683	17.348	3.60	0.630	0.750	19.050	2.700	12.010	0.250	6.35	0.041	1.04	5.00	SPR C Z
0.765	19.431	2848	1.00	25.400	0.643	16.332	11.00	1.925	0.570	14.478	6.500	28.912	0.430	10.92	0.061	1.55	7.00	HD CG Z
0.765	19.431	S-30	1.00	25.400	0.605	15.367	46.00	8.050	0.470	11.938	21.000	93.408	0.440	11.18	0.080	2.03	5.50	SST CG N
0.765	19.431	S-302	1.00	25.400	0.525	13.335	276.00	48.300	0.230	5.842	63.000	280.224	0.660	16.76	0.120	3.05	5.50	SST CG N
0.765	19.431	HH-76	1.00	25.400	0.485	12.319	502.00	87.850	0.160	4.064	80.000	355.840	0.840	21.34	0.140	3.56	6.00	SST CG N
0.765	19.431	S-3245	1.03	26.162	0.685	17.399	4.30	0.753	0.720	18.288	3.100	13.789	0.160	4.06	0.040	1.02	4.00	SST CG N
0.765	19.431	3682	1.06	26.924	0.671	17.043	5.80	1.015	0.820	20.828	4.800	21.350	0.250	6.35	0.047	1.19	5.25	SPR CG Z
0.765	19.431	S-1150	1.13	28.702	0.525	13.335	322.00	56.350	0.200	5.080	63.000	280.224	0.600	15.24	0.120	3.05	5.00	SST CG N
0.765	19.431	S-385	1.16	29.464	0.695	17.653	1.30	0.228	0.960	24.384	1.300	5.782	0.200	5.08	0.035	0.89	6.00	SST CG N
0.765	19.431	3152	1.16	29.464	0.551	13.995	165.00	28.875	0.310	7.874	51.000	226.848	0.640	16.26	0.107	2.72	6.00	SPR CG Z
0.765	19.431	S-187	1.25	31.750	0.665	16.891	3.30	0.578	0.830	21.082	2.700	12.010	0.430	10.92	0.050	1.27	8.50	SST CG N
0.765	19.431	S-1320	1.25	31.750	0.641	16.281	7.90	1.383	0.690	17.526	5.400	24.019	0.560	14.22	0.063	1.59	9.00	SST CG N
0.765	19.431	3771	1.25	31.750	0.495	12.573	477.00	83.475	0.200	5.080	94.000	418.112	0.810	20.57	0.135	3.43	6.00	SPR CG Z
0.765	19.431	12146	1.31	33.274	0.585	14.859	51.00	8.925	0.590	14.986	30.000	133.440	0.720	18.29	0.090	2.29	8.00	SPR CG Z
0.765	19.431	11599	1.41	35.814	0.691	17.551	2.10	0.368	1.200	30.480	2.500	11.120	0.230	5.84	0.037	0.94	5.33	SPR C Z
0.765	19.431	12122	1.41	35.814	0.603	15.316	39.00	6.825	0.610	15.494	24.000	106.752	0.570	14.48	0.081	2.06	7.00	SPR CG Z
0.765	19.431	2853	1.44	36.576	0.663	16.840	5.30	0.928	1.100	27.940	5.800	25.798	0.360	9.14	0.051	1.30	7.00	SPR CG Z
0.765	19.431	S-1623	1.47	37.338	0.625	15.875	18.00	3.150	0.790	20.066	14.000	62.272	0.560	14.22	0.070	1.78	7.00	SST CG N
0.765	19.431	S-222	1.50	38.100	0.695	17.653	1.20	0.210	1.300	33.020	1.500	6.672	0.250	6.35	0.035	0.89	6.00	SST CG N
0.765	19.431	10915	1.50	38.100	0.665	16.891	2.80	0.490	0.910	23.114	2.600	11.565	0.590	14.99	0.050	1.27	10.80	SPR C N
0.765	19.431	S-1298	1.50	38.100	0.629	15.977	18.00	3.150	0.790	20.066	14.000	62.272	0.440	11.18	0.068	1.73	6.50	SST CG N
0.765	19.431	S-438	1.50	38.100	0.621	15.773	17.00	2.975	0.920	23.368	16.000	71.168	0.580	14.73	0.072	1.83	8.00	SST CG N
0.765	19.431	S-253	1.56	39.624	0.525	13.335	164.00	28.700	0.380	9.652	63.000	280.224	0.960	24.38	0.120	3.05	8.00	SPR CG Z
0.765	19.431	4304	1.63	41.402	0.583	14.808	61.00	10.675	0.520	13.208	32.000	142.336	0.660	16.76	0.091	2.31	7.25	SPR CG Z
0.765	19.431	3411	1.63	41.402	0.555	14.097	111.00	19.425	0.440	11.176	48.000	213.504	0.790	20.07	0.105	2.67	7.50	SPR CG GI
0.765	19.431	NN-80	1.63	41.402	0.505	12.827	211.00	36.925	0.360	9.144	76.000	338.048	1.140	28.96	0.130	3.30	8.75	SST CG N
0.765	19.431	11410	1.81	45.974	0.525	13.335	153.00	26.775	0.450	11.430	69.000	306.912	1.110	28.19	0.120	3.05	9.25	SPR CG Z
0.765	19.431	4148	2.00	50.800	0.641	16.281	6.80	1.190	1.300	33.020	8.500	37.808	0.740	18.80	0.062	1.57	11.00	HD C Z
0.765	19.431	12164	2.00	50.800	0.601	15.265	27.00	4.725	0.900	22.860	24.000	106.752	0.860	21.84	0.082	2.08	9.50	SPR C Z
0.765	19.431	S-308	2.00	50.800	0.515	13.081	212.00	37.100	0.330	8.382	71.000	315.808	0.940	23.88	0.125	3.18	7.50	SST CG N
0.765	19.431	11803	2.09	53.086	0.579	14.707	59.00	10.325	0.580	14.732	34.000	151.232	0.740	18.80	0.093	2.36	8.00	SPR CG Z
0.765	19.431	S-433	2.19	55.626	0.641	16.281	8.20	1.435	1.316	33.426	10.800	48.038	0.544	13.82	0.063	1.59	8.70	SST CG N
0.765	19.431	S-909	2.44	61.976	0.603	15.316	18.00	3.150	1.263	32.080	23.000	102.304	0.972	24.69	0.082	2.08	11.90	SST CG N
0.765	19.431	11713	2.47	62.738	0.523	13.284	105.00	18.375	0.670	17.018	71.000	315.808	1.570	39.88	0.121	3.07	13.00	SPR CG Z
0.765	19.431	3439	2.69	68.326	0.577	14.656	41.00	7.175	0.850	21.590	35.000	155.6						




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
0.781	19.837	DD-81	1.00 25.400	0.621 15.773	61.00 10.675	0.340 8.636	21.000 93.408	0.360 9.14	0.080 2.03	4.50	SST	CG N
0.781	19.837	S-398	1.06 26.924	0.531 13.487	315.00 55.125	0.220 5.588	70.000 311.360	0.690 17.53	0.125 3.18	5.50	SST	CG N
0.781	19.837	3208	1.06 26.924	0.399 10.135	3105.00 543.375	0.070 1.778	227.000 1009.696	0.960 24.38	0.191 4.85	5.00	SPR	CG Z
0.781	19.837	S-357	1.09 27.686	0.541 13.741	299.00 52.325	0.210 5.334	62.000 275.776	0.600 15.24	0.120 3.05	5.00	SST	CG N
0.781	19.837	12558	1.13 28.702	0.501 12.725	559.00 97.825	0.180 4.572	103.000 458.144	0.810 20.57	0.140 3.56	5.75	SPR	CG N
0.781	19.837	10761	1.25 31.750	0.661 16.789	9.90 1.733	0.770 19.558	7.700 34.250	0.480 12.19	0.060 1.52	7.00	SPR	C Z
0.781	19.837	WW-38	1.25 31.750	0.657 16.688	12.00 2.100	0.857 21.768	10.300 45.814	0.393 9.98	0.063 1.59	6.30	SST	CG N
0.781	19.837	XX-65	1.25 31.750	0.531 13.487	249.00 43.575	0.310 7.874	76.000 338.048	0.880 22.35	0.125 3.18	7.00	SPR	CG Z
0.781	19.837	B18-187	1.28 32.512	0.673 17.094	7.50 1.513	0.890 22.606	6.700 29.802	0.390 9.91	0.054 1.37	6.25	SPR	C Z
0.781	19.837	4282	1.31 33.274	0.725 18.415	0.32 0.056	1.000 25.400	0.330 1.468	0.270 6.86	0.028 0.71	8.50	MW	C Z
0.781	19.837	4225	1.31 33.274	0.639 16.231	29.00 5.075	0.540 13.716	16.000 71.168	0.460 11.68	0.071 1.80	5.50	SPR	C Z
0.781	19.837	2835	1.31 33.274	0.511 12.979	443.00 77.525	0.210 5.334	92.000 409.216	0.810 20.57	0.135 3.43	6.00	SPR	CG Z
0.781	19.837	2973	1.50 38.100	0.679 17.247	2.60 0.455	0.910 23.114	2.400 10.675	0.590 14.99	0.051 1.30	11.80	SPR	CG Z
0.781	19.837	3498	1.50 38.100	0.651 16.535	8.70 1.523	0.790 20.066	6.900 30.691	0.720 18.29	0.065 1.65	10.00	SPR	C Z
0.781	19.837	11909	1.50 38.100	0.639 16.231	18.00 3.150	0.810 20.574	15.000 66.720	0.500 12.70	0.071 1.80	7.00	SST	CG N
0.781	19.837	10991	1.50 38.100	0.531 13.487	207.00 36.225	0.370 9.398	76.000 338.048	1.000 25.40	0.125 3.18	8.00	HD	CG Z
0.781	19.837	11167	1.50 38.100	0.531 13.487	216.00 37.800	0.350 8.890	76.000 338.048	0.970 24.64	0.125 3.18	7.75	SPR	CG Z
0.781	19.837	B11-25	1.50 38.100	0.409 10.389	2042.00 357.350	0.100 2.540	212.000 942.976	1.120 28.45	0.186 4.72	6.00	SPR	CG N
0.781	19.837	3127	1.63 41.402	0.641 16.281	19.00 3.325	0.780 19.812	15.000 66.720	0.490 12.45	0.070 1.78	7.00	SPR	CG Z
0.781	19.837	64	1.63 41.402	0.541 13.741	147.00 25.725	0.460 11.684	68.000 302.464	1.080 27.43	0.120 3.05	9.00	HD	CG Z
0.781	19.837	BB-55	1.63 41.402	0.461 11.709	582.00 101.850	0.220 5.588	130.000 578.240	1.280 32.51	0.162 4.11	8.00	SST	CG N
0.781	19.837	S-300	1.88 47.752	0.637 16.180	16.00 2.800	0.980 24.892	15.000 66.720	0.580 14.73	0.072 1.83	8.00	SST	CG N
0.781	19.837	387	2.25 57.150	0.541 13.741	103.00 18.025	0.660 16.764	68.000 302.464	1.440 36.58	0.120 3.05	12.00	HD	CG Z
0.781	19.837	S-1198	2.38 60.452	0.657 16.688	9.00 1.575	1.175 29.845	10.600 47.149	0.482 12.24	0.063 1.59	7.70	SST	CG N
0.781	19.837	S-1273	2.44 61.976	0.673 17.094	4.60 0.805	1.500 38.100	6.900 30.691	0.430 10.92	0.054 1.37	8.00	SST	CG N
0.781	19.837	4204	2.50 63.500	0.699 17.755	2.00 0.350	1.700 43.180	3.500 15.568	0.290 7.37	0.041 1.04	7.00	SPR	CG Z
0.781	19.837	4139	2.63 66.802	0.515 13.081	154.00 26.950	0.580 14.732	89.000 395.872	1.700 43.18	0.133 3.38	12.80	SPR	CG Z
0.781	19.837	3361	2.69 68.326	0.511 12.979	161.00 28.175	0.570 14.478	92.000 409.216	1.760 44.70	0.135 3.43	13.00	SPR	CG Z
0.781	19.837	3760	2.75 69.850	0.691 17.551	2.60 0.455	1.800 45.720	4.600 20.461	0.390 9.91	0.045 1.14	7.75	SPR	C Z
0.781	19.837	12322	2.78 70.612	0.609 15.469	20.00 3.500	1.400 35.560	28.000 124.544	1.200 30.48	0.086 2.18	14.00	SPR	CG GI
0.781	19.837	12275	2.84 72.136	0.587 14.910	57.00 9.975	0.660 16.764	38.000 169.024	0.870 22.10	0.097 2.46	9.00	SPR	CG Z
0.781	19.837	3484	2.88 73.152	0.531 13.487	131.00 22.925	0.580 14.732	76.000 338.048	1.440 36.58	0.125 3.18	11.50	HD	CG Z
0.781	19.837	YY-38	3.38 85.852	0.691 17.551	1.20 0.210	2.700 68.580	3.200 14.234	0.630 16.00	0.045 1.14	13.00	SST	C N
0.781	19.837	10818	3.50 88.900	0.731 18.567	0.10 0.018	3.100 78.740	0.320 1.423	0.390 9.91	0.025 0.64	14.80	MW	C N
0.781	19.837	3293	3.50 88.900	0.661 16.789	4.10 0.718	2.400 60.960	10.000 44.480	0.900 22.86	0.060 1.52	14.00	SPR	CG Z
0.781	19.837	3305	3.50 88.900	0.597 15.164	29.00 5.075	1.100 27.940	32.000 142.336	1.200 30.48	0.092 2.34	13.00	SPR	CG Z
0.781	19.837	3224	3.56 90.424	0.585 14.859	28.00 4.900	1.400 35.560	39.000 173.472	1.670 42.42	0.098 2.49	17.00	SPR	CG Z
0.781	19.837	3461	3.63 92.202	0.657 16.688	5.70 0.998	1.900 48.260	11.000 48.928	0.740 18.80	0.062 1.57	12.00	HD	CG Z
0.781	19.837	4217	4.00 101.600	0.689 17.501	1.50 0.263	3.200 81.280	4.900 21.795	0.620 15.75	0.046 1.17	12.50	SPR	C Z
0.781	19.837	11533	4.00 101.600	0.657 16.688	2.80 0.490	2.500 63.500	6.600 29.357	1.520 38.61	0.062 1.57	23.50	SPR	CG Z
0.781	19.837	B7-53	4.19 106.426	0.637 16.180	6.10 1.068	2.500 63.500	15.000 66.720	1.280 32.51	0.072 1.83	17.80	SST	CG N
0.781	19.837	12037	5.56 141.224	0.589 14.961	17.00 2.975	2.100 53.340	37.000 164.576	2.300 58.42	0.096 2.44	24.00	SPR	CG Z
0.785	19.939	12787	1.31 33.274	0.709 18.009	1.90 0.333	1.100 27.940	2.000 8.896	0.260 6.60	0.038 0.97	5.75	MW	C N
0.796	20.218	2740	0.66 16.764	0.652 16.561	34.00 5.950	0.300 7.620	10.000 44.480	0.360 9.14	0.072 1.83	5.00	MW	CG Z
0.796	20.218	1647	0.75 19.050	0.688 17.475	9.00 1.575	0.410 10.414	3.700 16.458	0.340 8.64	0.054 1.37	5.33	SPR	C Z
0.796	20.218	11810	0.84 21.336	0.674 17.120	17.00 2.975	0.540 13.716	9.000 40.032	0.310 7.87	0.061 1.55	5.00	SPR	CG Z
0.796	20.218	B11-38	1.00 25.400	0.708 17.983	3.60 0.630	0.760 19.304	2.700 12.010	0.240 6.10	0.044 1.12	5.50	SPR	CG N
0.796	20.218	A11-32	1.06 26.924	0.612 15.545	87.00 15.225	0.340 8.636	29.000 128.992	0.460 11.68	0.092 2.34	5.00	SST	CG N
0.796	20.218	S-491	1.06 26.924	0.546 13.868	294.00 51.450	0.230 5.842	68.000 302.464	0.690 17.53	0.125 3.18	5.50	SST	CG N
0.796	20.218	S-804	1.19 30.226	0.688 17.475	6.50 1.138	0.860 21.844	5.600 24.909	0.320 8.13	0.054 1.37	6.00	SST	CG N
0.796	20.218	2857	1.22 30.988	0.666 16.916	16.00 2.800	0.830 21.082	14.000 62.272	0.390 9.91	0.065 1.65	6.00	MW	CG Z
0.796	20.218	Y-28	1.28 32.512	0.596 15.138	90.00 15.750	0.450 11.430	41.000 182.368	0.680 17.27	0.100 2.54	6.75	SPR	CG Z
0.796	20.218	S-870	1.31 33.274	0.702 17.831	5.30 0.928	0.910 23.114	4.800 21.350	0.220 5.59	0.047 1.19	4.75	SST	CG N
0.796	20.218	3759	1.31 33.274	0.616 15.646	60.00 10.500	0.500 12.700	30.000 133.440	0.680 17.27	0.090 2.29	6.50	SPR	C Z
0.796	20.218	S-441	1.31 33.274	0.614 15.596	55.00 9.625	0.510 12.954	29.000 128.992	0.590 14.99	0.091 2.31	6.50	SST	CG N
0.796	20.218	3116	1.34 34.036	0.526 13.360	367.00 64.225	0.250 6.350	91.000 404.768	0.880 22.35	0.135 3.43	6.50	SPR	CG Z
0.796	20.218	S-1142	1.50 38.100	0.716 18.186	1.30 0.228	1.200 30.480	1.600 7.117	0.340 8.64	0.040 1.02	7.50	SST	C N
0.796	20.218	S-1207	1.50 38.100	0.652 16.561	22.00 3.850	0.680 17.272	15.000 66.720	0.430 10.92	0.072 1.83	6.00	SST	CG N
0.796	20.218	A13-66	1.50 38.100	0.586 14.884	94.00 16.450	0.460 11.684	43.000 191.264	0.740 18.80	0.105 2.67	7.00	SST	CG N
0.796	20.218	10668	1.50 38.100	0.552 14.021	181.00 31.675	0.390 9.906	70.000 311.360	0.950 24.13	0.122 3.10	7.75	SPR	CG Z
0.796	20.218	S-3156	1.56 39.624	0.672 17.069	5.80 1.015	0.914 23.216	5.300 23.574	0.646 16.41	0.063 1.59	10.30	SST	CG N
0.796	20.218	BB-28	1.63 41.402	0.676 17.170	9.20 1.610	1.000 25.400	9.300 41.366	0.390 9.91	0.060 1.52	6.50</		




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
0.796	20.218	10500	3.00 76.200	0.668 16.967	6.00 1.050	2.000 50.800	12.000 53.376	0.850 21.59	0.064 1.63	12.30	SPR C	Z
0.796	20.218	10494	3.00 76.200	0.664 16.866	8.80 1.540	1.500 38.100	13.000 57.824	0.660 16.76	0.066 1.68	10.00	SPR CG	Z
0.796	20.218	10667	3.13 79.502	0.560 14.224	87.00 15.225	0.730 18.542	63.000 280.224	1.450 36.83	0.118 3.00	12.30	SPR CG	Z
0.796	20.218	S-232	3.25 82.550	0.638 16.205	14.00 2.450	1.400 35.560	20.000 88.960	0.910 23.11	0.079 2.01	11.50	SST CG	N
0.796	20.218	3466	3.25 82.550	0.586 14.884	38.00 6.650	1.200 30.480	47.000 209.056	1.790 45.47	0.105 2.67	16.00	HD C	Z
0.796	20.218	B17-202	3.34 84.836	0.652 16.561	11.00 1.925	1.400 35.560	16.000 71.168	0.790 20.07	0.072 1.83	11.00	SPR CG	N
0.796	20.218	12035	3.38 85.852	0.598 15.189	27.00 4.725	1.400 35.560	39.000 173.472	1.680 42.67	0.099 2.51	17.00	SPR CG	Z
0.796	20.218	1547	3.50 88.900	0.642 16.307	13.00 2.275	1.500 38.100	20.000 88.960	1.060 26.92	0.077 1.96	12.80	SPR C	Z
0.796	20.218	3099	3.50 88.900	0.604 15.342	22.00 3.850	1.600 40.640	36.000 160.128	1.730 43.94	0.096 2.44	18.00	SPR CG	Z
0.796	20.218	11778	4.25 107.950	0.602 15.291	23.00 4.025	1.600 40.640	37.000 164.576	1.750 44.45	0.097 2.46	18.00	SPR CG	N
0.796	20.218	12204	4.31 109.474	0.636 16.154	11.00 1.925	2.000 50.800	22.000 97.856	1.320 33.53	0.080 2.03	16.50	SPR CG	Z
0.796	20.218	S-1584	7.75 196.850	0.636 16.154	14.00 2.450	1.400 35.560	21.000 93.408	0.960 24.38	0.080 2.03	12.00	SST CG	N
0.796	20.218	10848	8.25 209.550	0.676 17.170	2.30 0.403	4.200 106.680	9.900 44.035	1.380 35.05	0.060 1.52	22.00	SPR C	GI
0.796	20.218	3054	9.00 228.600	0.672 17.069	3.00 0.525	3.600 91.440	11.000 48.928	1.300 33.02	0.062 1.57	20.00	SPR C	Z
0.796	20.218	S-76	11.40 289.560	0.466 11.836	88.00 15.400	1.496 37.998	132.000 587.136	6.543 166.19	0.162 4.11	40.40	SST CG	N
0.812	20.625	DD-6	0.38 9.652	0.762 19.355	0.33 0.058	0.210 5.334	0.070 0.311	0.160 4.06	0.025 0.64	5.50	MW C	Z
0.812	20.625	2856	0.47 11.938	0.704 17.882	11.00 1.925	0.230 5.842	2.500 11.120	0.240 6.10	0.054 1.37	4.50	HD CG	Z
0.812	20.625	FF-36	0.50 12.700	0.692 17.577	18.00 3.150	0.170 4.318	3.000 13.344	0.330 8.38	0.060 1.52	4.50	SPR C	N
0.812	20.625	S-939	0.69 17.526	0.668 16.967	56.00 9.800	0.260 6.604	15.000 66.720	0.250 6.35	0.072 1.83	3.50	SST CG	N
0.812	20.625	3356	0.69 17.526	0.642 16.307	98.00 17.150	0.260 6.604	26.000 115.648	0.340 8.64	0.085 2.16	4.00	SPR CG	Z
0.812	20.625	DD-84	0.72 18.288	0.722 18.339	3.20 0.560	0.470 11.938	1.500 6.672	0.250 6.35	0.045 1.14	5.50	SST CG	N
0.812	20.625	II-7	0.78 19.812	0.692 17.577	9.70 1.698	0.420 10.668	4.100 18.237	0.360 9.14	0.060 1.52	6.00	SST CG	N
0.812	20.625	11432	0.81 20.574	0.662 16.815	28.00 4.900	0.360 9.144	10.000 44.480	0.450 11.43	0.075 1.91	6.00	SPR CG	Z
0.812	20.625	H-21	0.81 20.574	0.602 15.291	195.00 34.125	0.220 5.588	43.000 191.264	0.450 11.43	0.015 2.67	4.25	SST CG	N
0.812	20.625	12639	0.88 22.352	0.520 13.208	1474.00 257.950	0.070 1.778	103.000 458.144	0.650 16.51	0.148 3.76	3.40	SST C	N
0.812	20.625	S-123	1.00 25.400	0.704 17.882	11.00 1.925	0.610 15.494	6.700 29.802	0.230 5.84	0.054 1.37	4.25	SST CG	N
0.812	20.625	10340	1.00 25.400	0.686 17.424	18.00 3.150	0.620 15.748	11.000 48.928	0.380 9.65	0.063 1.60	5.00	SPR C	Z
0.812	20.625	FF-68	1.00 25.400	0.532 13.513	497.00 86.975	0.180 4.572	89.000 395.872	0.740 18.80	0.140 3.56	5.25	SST CG	N
0.812	20.625	3038	1.03 26.162	0.632 16.053	61.00 10.675	0.480 12.192	29.000 128.992	0.550 13.97	0.090 2.29	6.00	SPR CG	GI
0.812	20.625	4160	1.19 30.226	0.496 12.598	801.00 140.175	0.170 4.318	137.000 609.376	0.950 24.13	0.158 4.01	6.00	SPR CG	Z
0.812	20.625	S-1609	1.22 30.988	0.602 15.291	110.00 19.250	0.390 9.906	43.000 191.264	0.630 16.00	0.105 2.67	6.00	SST CG	N
0.812	20.625	1918	1.22 30.988	0.504 12.802	710.00 124.250	0.180 4.572	127.000 564.896	0.920 23.37	0.154 3.91	6.00	SPR CG	Z
0.812	20.625	KK-6	1.25 31.750	0.592 15.037	122.00 21.350	0.420 10.668	51.000 226.848	0.770 19.56	0.110 2.79	7.00	SPR CG	N
0.812	20.625	S-933	1.28 32.512	0.686 17.424	12.00 2.100	0.849 21.565	10.200 45.370	0.423 10.74	0.063 1.59	5.80	SST C	N
0.812	20.625	K-48	1.38 35.052	0.528 13.411	389.00 68.075	0.270 6.858	103.000 458.144	0.990 25.15	0.142 3.61	7.00	SPR CG	Z
0.812	20.625	2680	1.38 35.052	0.500 12.700	670.00 117.250	0.280 7.112	184.000 818.432	1.010 25.65	0.156 3.96	6.50	MW CG	Z
0.812	20.625	63	1.38 35.052	0.488 12.395	721.00 126.175	0.200 5.080	147.000 653.856	1.130 28.70	0.162 4.11	7.00	HD CG	Z
0.812	20.625	S-25	1.50 38.100	0.758 19.253	0.34 0.060	1.300 33.020	0.450 2.002	0.190 4.83	0.027 0.69	6.00	SST C	N
0.812	20.625	10601	1.50 38.100	0.728 18.491	1.40 0.245	1.100 27.940	1.500 6.672	0.420 10.67	0.042 1.07	9.00	SPR C	Z
0.812	20.625	S-366	1.50 38.100	0.718 18.237	3.40 0.595	1.200 30.480	4.100 18.237	0.280 7.11	0.047 1.19	6.00	SST CG	N
0.812	20.625	12554	1.50 38.100	0.652 16.561	26.00 4.550	0.770 19.558	20.000 88.960	0.560 14.22	0.080 2.03	7.00	SST CG	N
0.812	20.625	S-3207	1.53 38.862	0.602 15.291	88.00 15.400	0.480 12.192	43.000 191.264	0.740 18.80	0.105 2.67	7.00	SST CG	N
0.812	20.625	10788	1.63 41.402	0.688 17.475	9.90 1.733	1.029 26.137	10.200 45.370	0.474 12.04	0.063 1.59	6.60	SST C	N
0.812	20.625	3960	1.63 41.402	0.572 14.529	138.00 24.150	0.470 11.938	65.000 289.120	1.020 25.91	0.120 3.05	8.50	SPR CG	Z
0.812	20.625	S-799	1.66 42.164	0.716 18.186	3.80 0.665	1.247 31.674	4.700 20.906	0.273 6.93	0.048 1.21	5.70	SST CG	N
0.812	20.625	3801	1.69 42.926	0.602 15.291	76.00 13.300	0.600 15.240	46.000 204.608	0.890 22.61	0.105 2.67	8.50	SPR CG	GI
0.812	20.625	2645	1.75 44.450	0.688 17.475	4.20 0.735	0.820 20.828	3.400 15.123	0.930 23.62	0.062 1.57	14.00	HD C	Z
0.812	20.625	12605	1.75 44.450	0.652 16.561	27.00 4.725	1.100 27.940	29.000 128.992	0.680 17.27	0.080 2.03	7.50	MW CG	N
0.812	20.625	3079	1.75 44.450	0.572 14.529	124.00 21.700	0.530 13.462	65.000 289.120	1.110 28.19	0.120 3.05	9.25	SPR CG	Z
0.812	20.625	3354	1.75 44.450	0.572 14.529	129.00 22.575	0.510 12.954	65.000 289.120	1.200 30.48	0.120 3.05	9.00	SPR C	Z
0.812	20.625	3139	1.78 45.212	0.518 13.157	380.00 66.500	0.300 7.620	114.000 507.072	1.180 29.97	0.147 3.73	8.00	SPR CG	Z
0.812	20.625	12490	1.81 45.974	0.706 17.932	3.80 0.665	1.300 33.020	5.000 22.240	0.480 12.19	0.053 1.35	8.00	SST C	N
0.812	20.625	65	1.88 47.752	0.572 14.529	116.00 20.300	0.560 14.224	65.000 289.120	1.170 29.72	0.120 3.05	9.75	HD CG	Z
0.812	20.625	2974	2.00 50.800	0.730 18.542	1.10 0.193	1.500 38.100	1.700 7.562	0.450 11.43	0.041 1.04	10.00	SPR C	Z
0.812	20.625	3282	2.00 50.800	0.688 17.475	5.00 0.875	1.300 33.020	6.300 28.022	0.740 18.80	0.062 1.57	12.00	HD CG	Z
0.812	20.625	12157	2.13 54.102	0.650 16.510	26.00 4.550	0.850 21.590	22.000 97.856	0.650 16.51	0.081 2.06	8.00	SPR CG	GI
0.812	20.625	S-1215	2.13 54.102	0.612 15.545	35.00 6.125	0.930 23.622	32.000 142.336	1.200 30.48	0.100 2.54	12.00	SST CG	N
0.812	20.625	11959	2.16 54.864	0.744 18.898	0.52 0.091	1.800 45.720	0.940 4.181	0.340 8.64	0.034 0.86	9.00	SST C	N
0.812	20.625	3945	2.19 55.626	0.704 17.882	3.10 0.543	1.500 38.100	4.800 21.350	0.650 16.51	0.054 1.37	11.00	SPR C	Z
0.812	20.625	B8-35	2.25 57.150	0.708 17.983	2.70 0.473	1.700 43.180	4.600 20.461	0.520 13.21	0.052 1.32	10.00	SST CG	N
0.812	20.625	69	2.25 57.150	0.602 15.291	55.00 9.625	0.840 21.336	46.000 204.608	1.260 32.00	0.105 2.67	11.00	HD CG	Z
0.812	20.625	70	2.25 57.150	0.572 14.529	112.00 19.600	0.580 14.732	65.000 289.120	1.320 33.53	0.120 3.05	10.00	HD C	Z
0.812												




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
0.812	20.625	S-1400	3.88 98.552	0.668 16.967	6.60 1.155	2.200 55.880	15.000 66.720	1.120 28.45	0.072 1.83	14.50	SST	C N
0.812	20.625	10687	3.88 98.552	0.652 16.561	11.00 1.925	1.900 48.260	22.000 97.856	1.240 31.50	0.080 2.03	15.50	SPR	CG Z
0.812	20.625	2837	4.25 107.950	0.724 18.390	1.30 0.228	3.100 78.740	4.100 18.237	0.530 13.46	0.044 1.12	11.00	SPR	C GI
0.812	20.625	12431	4.25 107.950	0.724 18.390	1.30 0.228	3.100 78.740	4.100 18.237	0.530 13.46	0.044 1.12	11.00	SPR	C GI
0.812	20.625	11248	4.50 114.300	0.592 15.037	31.00 5.425	1.600 40.640	51.000 226.848	2.370 60.20	0.110 2.79	21.50	SPR	CG Z
0.812	20.625	S-966	4.75 120.650	0.652 16.561	7.70 1.348	2.600 66.040	20.000 88.960	1.510 38.35	0.080 2.03	19.00	SST	CG N
0.812	20.625	2701	5.13 130.302	0.626 15.900	15.00 2.625	2.900 73.660	45.000 200.160	2.020 51.31	0.093 2.36	20.80	MW	C Z
0.812	20.625	11601	5.13 130.302	0.536 13.614	71.00 12.425	1.300 33.020	95.000 422.560	3.730 94.74	0.138 3.51	26.00	SPR	C Z
0.812	20.625	2589	5.19 131.826	0.488 12.395	180.00 31.500	0.810 20.574	147.000 653.856	3.560 90.42	0.162 4.11	22.00	HD	CG Z
0.812	20.625	2738	5.50 139.700	0.592 15.037	30.00 5.250	1.700 43.180	51.000 226.848	2.480 62.99	0.110 2.79	22.50	SPR	CG Z
0.812	20.625	10214	7.00 177.800	0.602 15.291	22.00 3.850	2.100 53.340	46.000 204.608	2.570 65.28	0.105 2.67	24.50	SPR	CG Z
0.812	20.625	2997	9.19 233.426	0.516 13.106	54.00 9.450	2.200 55.880	116.000 515.968	6.810 172.97	0.148 3.76	46.00	SPR	C Z
0.812	20.625	12741	10.00 254.000	0.558 14.173	31.00 5.425	2.500 63.500	77.000 342.496	5.210 132.33	0.127 3.23	40.00	SPR	C N
0.812	20.625	4244	15.50 393.700	0.602 15.291	11.00 1.925	4.100 104.140	46.000 204.608	4.880 123.95	0.105 2.67	46.50	SPR	CG Z
0.822	20.879	B-66	2.63 66.802	0.550 13.970	160.00 28.000	0.650 16.510	105.000 467.040	1.700 43.18	0.136 3.45	11.50	OT	C N
0.828	21.031	11483	0.50 12.700	0.728 18.491	19.00 3.325	0.290 7.366	5.500 24.464	0.200 5.08	0.050 1.27	3.00	SPR	CG Z
0.828	21.031	B14-67	0.50 12.700	0.672 17.069	126.00 22.050	0.160 4.064	20.000 88.960	0.230 5.84	0.078 1.98	3.00	SPR	CG Z
0.828	21.031	KK-62	0.50 12.700	0.588 14.935	745.00 130.375	0.080 2.032	59.000 262.432	0.360 9.14	0.120 3.05	3.00	SST	CG N
0.828	21.031	S-349	0.72 18.288	0.642 16.307	320.00 56.000	0.090 2.286	29.000 128.992	0.260 6.60	0.093 2.36	2.75	SST	CG N
0.828	21.031	S-416	0.78 19.812	0.704 17.882	10.00 1.750	0.392 9.957	3.900 17.347	0.391 9.93	0.063 1.59	6.30	SST	CG N
0.828	21.031	S-1111	0.81 20.574	0.764 19.406	1.00 0.175	0.640 16.256	0.660 2.936	0.180 4.57	0.032 0.81	4.50	SST	C N
0.828	21.031	3872	0.81 20.574	0.732 18.593	11.00 1.925	0.490 12.446	5.200 23.130	0.220 5.59	0.048 1.22	3.50	SPR	C Z
0.828	21.031	11361	0.81 20.574	0.668 16.967	71.00 12.425	0.280 7.112	20.000 88.960	0.300 7.62	0.080 2.03	3.75	SST	CG N
0.828	21.031	11227	0.84 21.336	0.474 12.040	2922.00 511.350	0.060 1.524	185.000 822.880	0.660 16.76	0.177 4.50	3.75	SPR	CG Z
0.828	21.031	2958	0.91 23.114	0.734 18.644	3.70 0.648	0.620 15.748	2.300 10.230	0.280 7.11	0.047 1.19	6.00	SPR	CG Z
0.828	21.031	12430	0.94 23.876	0.742 18.847	9.00 1.575	0.390 9.906	3.500 15.568	0.170 4.32	0.043 1.09	3.00	SST	C N
0.828	21.031	S-3206	0.94 23.876	0.732 18.593	8.10 1.418	0.574 14.580	4.700 20.906	0.174 4.42	0.048 1.21	3.70	SST	CG N
0.828	21.031	12315	1.00 25.400	0.764 19.406	0.75 0.131	0.810 20.574	0.600 2.669	0.190 4.83	0.032 0.81	6.00	SPR	CG Z
0.828	21.031	KK-58	1.00 25.400	0.728 18.491	9.50 1.663	0.580 14.732	5.500 24.464	0.200 5.08	0.050 1.27	4.00	SPR	CG Z
0.828	21.031	4333	1.00 25.400	0.704 17.882	16.00 2.800	0.630 16.002	9.900 44.035	0.370 9.40	0.062 1.57	5.00	SPR	C N
0.828	21.031	10792	1.00 25.400	0.646 16.408	55.00 9.625	0.450 11.430	25.000 111.200	0.550 13.97	0.091 2.31	6.00	SST	CG N
0.828	21.031	KK-97	1.00 25.400	0.608 15.443	112.00 19.600	0.290 7.366	32.000 142.336	0.720 18.29	0.110 2.79	6.50	SST	CG N
0.828	21.031	11478	1.03 26.162	0.728 18.491	9.50 1.663	0.580 14.732	5.500 24.464	0.250 6.35	0.050 1.27	4.00	SPR	CG Z
0.828	21.031	3852	1.06 26.924	0.732 18.593	4.30 0.753	0.740 18.796	3.200 14.234	0.320 8.13	0.048 1.22	5.75	SPR	C Z
0.828	21.031	11696	1.06 26.924	0.648 16.459	59.00 10.325	0.490 12.446	29.000 128.992	0.540 13.72	0.090 2.29	6.00	SPR	CG GI
0.828	21.031	12176	1.22 30.988	0.516 13.106	701.00 122.675	0.180 4.572	130.000 578.240	0.940 23.88	0.156 3.96	6.00	SPR	CG Z
0.828	21.031	10702	1.38 35.052	0.700 17.780	18.00 3.150	0.640 16.256	12.000 53.376	0.320 8.13	0.064 1.63	5.00	SPR	CG Z
0.828	21.031	A13-64	1.38 35.052	0.686 17.424	28.00 4.900	0.530 13.462	15.000 66.720	0.360 9.14	0.071 1.80	5.00	SPR	CG GI
0.828	21.031	10944	1.50 38.100	0.708 17.983	10.00 1.750	0.920 23.368	9.500 42.256	0.360 9.14	0.060 1.52	6.00	SPR	C Z
0.828	21.031	S-3163	1.50 38.100	0.708 17.983	29.00 5.075	0.300 7.620	8.900 39.587	0.480 12.19	0.060 1.52	6.00	SST	CG N
0.828	21.031	3424	1.50 38.100	0.418 10.617	2100.00 367.500	0.070 1.778	136.000 604.928	1.440 36.58	0.205 5.21	7.00	SPR	CG Z
0.828	21.031	S-292	1.63 41.402	0.644 16.358	35.00 6.125	0.820 20.828	28.000 124.544	0.780 19.81	0.092 2.34	8.50	SST	CG N
0.828	21.031	S-1080	1.75 44.450	0.724 18.390	4.30 0.753	1.300 33.020	5.800 25.798	0.390 9.91	0.052 1.32	6.50	SST	C N
0.828	21.031	11768	1.75 44.450	0.648 16.459	39.00 6.825	0.730 18.542	29.000 128.992	0.720 18.29	0.090 2.29	8.00	SPR	CG Z
0.828	21.031	TT-59	1.88 47.752	0.668 16.967	24.00 4.200	0.810 20.574	20.000 88.960	0.560 14.22	0.080 2.03	7.00	SST	CG N
0.828	21.031	10527	1.91 48.514	0.532 13.513	366.00 64.050	0.310 7.874	114.000 507.072	1.180 29.97	0.148 3.76	8.00	SPR	CG N
0.828	21.031	12211	1.94 49.276	0.708 17.983	8.20 1.435	1.200 30.480	9.500 42.256	0.420 10.67	0.060 1.52	7.00	SPR	CG Z
0.828	21.031	S-339	2.00 50.800	0.578 14.681	117.00 20.475	0.560 14.224	66.000 293.568	1.190 30.23	0.125 3.18	9.50	SST	CG N
0.828	21.031	3226	2.09 53.086	0.638 16.205	42.00 7.350	0.790 20.066	34.000 151.232	0.950 24.13	0.095 2.41	9.00	SPR	C Z
0.828	21.031	10591	2.13 54.102	0.668 16.967	23.00 4.025	0.900 22.860	21.000 93.408	0.720 18.29	0.080 2.03	8.00	SPR	C Z
0.828	21.031	S-361	2.13 54.102	0.668 16.967	17.00 2.975	1.100 27.940	20.000 88.960	0.720 18.29	0.080 2.03	9.00	SST	CG N
0.828	21.031	11987	2.19 55.626	0.716 18.186	2.90 0.508	1.500 38.100	4.400 19.571	0.700 17.78	0.056 1.42	12.50	SPR	CG GI
0.828	21.031	11354	2.50 63.500	0.668 16.967	14.00 2.450	1.400 35.560	20.000 88.960	0.960 24.38	0.080 2.03	11.00	SST	C N
0.828	21.031	1903	2.50 63.500	0.646 16.408	25.00 4.375	1.200 30.480	30.000 133.440	1.070 27.18	0.091 2.31	11.80	SPR	CG Z
0.828	21.031	11258	2.50 63.500	0.578 14.681	101.00 17.675	0.720 18.288	72.000 320.256	1.500 38.10	0.125 3.18	12.00	SPR	CG Z
0.828	21.031	11933	2.63 66.802	0.738 18.745	1.80 0.315	2.200 55.880	3.900 17.347	0.410 10.41	0.045 1.14	9.00	SPR	CG Z
0.828	21.031	10806	2.63 66.802	0.658 16.713	18.00 3.150	1.300 33.020	24.000 106.752	1.020 25.91	0.085 2.16	11.00	SST	C N
0.828	21.031	S-287	2.75 69.850	0.742 18.847	0.88 0.154	2.200 55.880	2.000 8.896	0.520 13.21	0.043 1.09	12.00	SST	CG N
0.828	21.031	S-3038	2.88 73.152	0.454 11.532	553.00 96.775	0.320 8.128	177.000 787.296	2.340 59.44	0.187 4.75	12.50	SST	CG N
0.828	21.031	S-3202	3.00 76.200	0.762 19.355	0.25 0.044	2.500 63.500	0.640 2.847	0.460 11.68	0.033 0.84	14.00	SST	CG N
0.828	21.031	S-63	3.00 76.200	0.758 19.253	0.31 0.054	2.500 63.500	0.790 3.514	0.490 12.45	0.035 0.89	14.00	SST	CG N
0.828	21.031	S-72	3.00 76.200	0.618 15.697	50.00 8.750	0.830 21.082	42.000 186.816	1.160 29.46				




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
0.843	21.412	84-15	0.50 12.700	0.743 18.872	12.00 2.100	0.330 8.382	3.900 17.347	0.180 4.57	0.050 1.27	3.50	SPR	CG N
0.843	21.412	B2-56	0.69 17.526	0.649 16.485	102.00 17.850	0.200 5.080	21.000 93.408	0.490 12.45	0.097 2.46	5.00	MW	CG N
0.843	21.412	H-38	0.69 17.526	0.649 16.485	89.00 15.575	0.200 5.080	18.000 80.064	0.490 12.45	0.097 2.46	5.00	SST	CG N
0.843	21.412	11530	0.69 17.526	0.575 14.605	743.00 130.025	0.050 1.270	38.000 169.024	0.640 16.26	0.134 3.40	3.75	SPR	CG Z
0.843	21.412	4310	0.69 17.526	0.573 14.554	1076.00 188.300	0.080 2.032	86.000 382.528	0.440 11.18	0.135 3.43	3.25	SPR	CG Z
0.843	21.412	S-371	0.75 19.050	0.657 16.688	111.00 19.425	0.260 6.604	29.000 128.992	0.370 9.40	0.093 2.36	4.00	SST	CG N
0.843	21.412	XX-54	0.81 20.574	0.683 17.348	77.00 13.475	0.250 6.350	19.000 84.512	0.280 7.11	0.080 2.03	3.50	SST	CG N
0.843	21.412	S-226	0.91 23.114	0.665 16.891	37.00 6.475	0.267 6.782	9.900 44.035	0.644 16.36	0.090 2.29	7.20	SST	CG N
0.843	21.412	PP-48	1.00 25.400	0.783 19.888	0.96 0.168	0.880 22.352	0.850 3.781	0.120 3.05	0.030 0.76	4.00	SST	CG N
0.843	21.412	S-150	1.00 25.400	0.749 19.025	4.00 0.700	0.720 18.288	2.900 12.899	0.280 7.11	0.047 1.19	5.00	SST	C N
0.843	21.412	S-1155	1.00 25.400	0.719 18.263	19.00 3.325	0.517 13.132	9.800 43.590	0.250 6.35	0.063 1.59	4.10	SST	CG N
0.843	21.412	10028	1.00 25.400	0.703 17.856	37.00 6.475	0.370 9.398	14.000 62.272	0.280 7.11	0.070 1.78	4.00	SPR	CG Z
0.843	21.412	S-255	1.00 25.400	0.693 17.602	26.00 4.550	0.600 15.240	16.000 71.168	0.400 10.16	0.075 1.91	5.33	SST	CG N
0.843	21.412	S-1627	1.00 25.400	0.673 17.094	56.00 9.800	0.420 10.668	23.000 102.304	0.490 12.45	0.085 2.16	4.75	SST	C N
0.843	21.412	12668	1.00 25.400	0.659 16.739	81.00 14.175	0.520 13.208	42.000 186.816	0.460 11.68	0.092 2.34	5.00	MW	CG N
0.843	21.412	12674	1.00 25.400	0.659 16.739	108.00 18.900	0.390 9.906	42.000 186.816	0.390 9.91	0.092 2.34	4.25	MW	CG N
0.843	21.412	B15-22	1.03 26.162	0.723 18.364	17.00 2.975	0.510 12.954	8.800 39.142	0.240 6.10	0.060 1.52	4.00	SST	CG N
0.843	21.412	B6-47	1.06 26.924	0.723 18.364	19.00 3.325	0.480 12.192	9.300 41.366	0.300 7.62	0.060 1.52	4.00	SPR	C N
0.843	21.412	QQ-59	1.13 28.702	0.699 17.755	18.00 3.150	0.690 17.526	13.000 57.824	0.430 10.92	0.072 1.83	6.00	SST	CG N
0.843	21.412	11139	1.19 30.226	0.661 16.789	77.00 13.475	0.380 9.652	29.000 128.992	0.550 13.97	0.091 2.31	5.00	SPR	C Z
0.843	21.412	M-23	1.25 31.750	0.775 19.685	1.20 0.210	1.000 25.400	1.300 5.782	0.200 5.08	0.034 0.86	5.00	SPR	C Z
0.843	21.412	S-882	1.25 31.750	0.713 18.110	16.00 2.800	0.680 17.272	11.000 48.928	0.320 8.13	0.065 1.65	5.00	SST	CG N
0.843	21.412	K-63	1.25 31.750	0.707 17.958	17.00 2.975	0.820 20.828	14.000 62.272	0.410 10.41	0.068 1.73	6.00	SPR	CG GI
0.843	21.412	3095	1.25 31.750	0.693 17.602	27.00 4.725	0.640 16.256	17.000 75.616	0.430 10.92	0.075 1.91	5.75	SPR	CG Z
0.843	21.412	2892	1.28 32.512	0.683 17.348	27.00 4.725	0.730 18.542	20.000 88.960	0.550 13.97	0.080 2.03	7.00	SPR	CG Z
0.843	21.412	S-77	1.38 35.052	0.761 19.329	2.10 0.368	1.100 27.940	2.400 10.675	0.260 6.60	0.041 1.04	5.25	SST	C N
0.843	21.412	11995	1.38 35.052	0.715 18.161	7.30 1.278	0.800 20.320	5.800 25.798	0.580 14.73	0.064 1.63	9.00	SPR	CG Z
0.843	21.412	S-807	1.41 35.814	0.683 17.348	29.00 5.075	0.670 17.018	19.000 84.512	0.480 12.19	0.080 2.03	6.00	SST	CG N
0.843	21.412	11784	1.41 35.814	0.647 16.434	71.00 12.425	0.510 12.954	36.000 160.128	0.640 16.26	0.098 2.49	6.50	SPR	CG N
0.843	21.412	10821	1.41 35.814	0.583 14.808	227.00 39.725	0.340 8.636	78.000 346.944	0.910 23.11	0.130 3.30	7.00	SPR	CG Z
0.843	21.412	3168	1.47 37.338	0.735 18.669	5.00 0.875	1.100 27.940	5.400 24.019	0.380 9.65	0.054 1.37	7.00	SPR	CG Z
0.843	21.412	1649	1.50 38.100	0.731 18.567	7.30 1.278	1.000 25.400	7.600 33.805	0.390 9.91	0.056 1.42	6.00	SPR	C Z
0.843	21.412	3214	1.50 38.100	0.715 18.161	17.00 2.975	0.660 16.764	11.000 48.928	0.380 9.65	0.064 1.63	5.00	SPR	CG Z
0.843	21.412	B12-64	1.50 38.100	0.713 18.110	12.00 2.100	0.980 24.892	12.000 53.376	0.490 12.45	0.065 1.65	6.50	SPR	C N
0.843	21.412	12612	1.50 38.100	0.683 17.348	33.00 5.775	0.630 16.002	21.000 93.408	0.480 12.19	0.080 2.03	6.00	SPR	CG Z
0.843	21.412	S-54	1.50 38.100	0.623 15.824	124.00 21.700	0.360 9.144	45.000 200.160	0.630 16.00	0.110 2.79	5.75	SST	CG N
0.843	21.412	1775	1.59 40.386	0.715 18.161	6.20 1.085	0.940 23.876	5.800 25.798	0.660 16.76	0.064 1.63	10.30	SPR	CG Z
0.843	21.412	1569	1.63 41.402	0.763 19.380	2.00 0.350	1.400 35.560	2.800 12.454	0.260 6.60	0.040 1.02	5.50	SPR	C Z
0.843	21.412	S-1478	1.63 41.402	0.727 18.466	5.80 1.015	1.200 30.480	7.100 31.581	0.410 10.41	0.058 1.47	7.00	SST	CG N
0.843	21.412	S-3001	1.63 41.402	0.719 18.263	10.00 1.750	0.983 24.968	9.800 43.590	0.376 9.55	0.063 1.59	6.00	SST	CG N
0.843	21.412	10703	1.75 44.450	0.735 18.669	5.90 1.033	1.200 30.480	6.800 30.246	0.390 9.91	0.054 1.37	6.25	SPR	C Z
0.843	21.412	S-824	1.75 44.450	0.683 17.348	14.00 2.450	0.950 24.130	14.000 62.272	0.800 20.32	0.080 2.03	10.00	SST	CG N
0.843	21.412	B12-37	2.00 50.800	0.661 16.789	39.00 6.825	0.750 19.050	29.000 128.992	0.820 20.83	0.091 2.31	8.00	SPR	C N
0.843	21.412	12613	2.00 50.800	0.643 16.332	58.00 10.150	0.920 23.368	54.000 240.192	0.900 22.86	0.100 2.54	8.00	MW	CG N
0.843	21.412	S-82	2.00 50.800	0.603 15.316	110.00 19.250	0.530 13.462	58.000 257.984	1.110 28.19	0.120 3.05	8.25	SST	C N
0.843	21.412	JJ-54	2.00 50.800	0.503 12.776	499.00 87.325	0.290 7.366	145.000 644.960	1.530 38.86	0.170 4.32	9.00	SST	CG N
0.843	21.412	S-66	2.06 52.324	0.603 15.316	112.00 19.600	0.520 13.208	58.000 257.984	0.990 25.15	0.120 3.05	8.25	SST	CG N
0.843	21.412	11949	2.09 53.086	0.517 13.132	409.00 71.575	0.307 7.798	126.000 560.448	1.404 35.66	0.162 4.11	8.70	SST	CG N
0.843	21.412	10239	2.19 55.626	0.661 16.789	66.00 11.550	0.440 11.176	29.000 128.992	0.500 12.70	0.091 2.31	5.50	SPR	CG Z
0.843	21.412	S-3258	2.25 57.150	0.703 17.856	11.00 1.925	1.200 30.480	13.000 57.824	0.560 14.22	0.070 1.78	8.00	SST	CG N
0.843	21.412	3501	2.44 61.976	0.699 17.755	12.00 2.100	1.700 43.180	21.000 93.408	0.720 18.29	0.072 1.83	9.00	MW	C Z
0.843	21.412	11185	2.47 62.738	0.633 16.078	62.00 10.850	0.710 18.034	44.000 195.712	0.950 24.13	0.105 2.67	9.00	HD	CG Z
0.843	21.412	2842	2.50 63.500	0.709 18.009	7.10 1.243	1.800 45.720	13.000 57.824	0.720 18.29	0.067 1.70	10.80	HD	CG Z
0.843	21.412	B10-9	2.50 63.500	0.697 17.704	12.00 2.100	1.300 33.020	16.000 71.168	0.680 17.27	0.073 1.85	9.25	SPR	CG BO
0.843	21.412	3266	2.75 69.850	0.633 16.078	51.00 8.925	0.870 22.098	44.000 195.712	1.100 27.94	0.105 2.67	10.50	SPR	CG Z
0.843	21.412	11902	2.81 71.374	0.579 14.707	110.00 19.250	0.730 18.542	81.000 360.288	1.720 43.69	0.132 3.35	13.00	SPR	C N
0.843	21.412	S-201	3.00 76.200	0.717 18.212	5.20 0.910	1.890 48.006	9.800 43.590	0.690 17.53	0.063 1.59	10.00	SST	C N
0.843	21.412	3388	3.00 76.200	0.673 17.094	16.00 2.800	1.600 40.640	25.000 111.200	1.110 28.19	0.085 2.16	13.00	SPR	CG Z
0.843	21.412	12246	3.25 82.550	0.731 18.567	3.90 0.683	2.000 50.800	7.600 33.805	0.530 13.46	0.056 1.42	9.50	SPR	CG Z
0.843	21.412	1567	3.25 82.550	0.699 17.755	9.40 1.645	1.600 40.640	15.000 66.720	0.860 21.84	0.072 1.83	11.00	SPR	C Z
0.843	21.412	S-1631	3.28 83.312	0.649 16.485	26.00 4.550	1.300 33.020	33.000 146.784	1.210 30.73	0.097 2.46	12.50	SST	CG N
0.843	21.412	11350	3.50 88.900	0.709 18.009	5.50 0.963	2.200 55.880	12.000 53.376	0.800 20.32	0.067 1.70	12.00	SST	CG N
0.843	21											




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fnsh
0.85	21.590	72210	0.75 19.050	0.690 17.526	67.00 11.725	0.430 10.922	29.000 128.992	0.310 7.87	0.080 2.03	3.88	MW	CG N
0.85	21.590	72210S	0.75 19.050	0.690 17.526	57.00 9.975	0.340 8.636	19.000 84.512	0.310 7.87	0.080 2.03	3.88	SST	CG N
0.85	21.590	72233	0.75 19.050	0.688 17.475	68.00 11.900	0.430 10.922	29.000 128.992	0.320 8.13	0.081 2.06	4.00	MW	CG N
0.85	21.590	72246	0.75 19.050	0.680 17.272	84.00 14.700	0.410 10.414	34.000 151.232	0.340 8.64	0.085 2.16	4.00	MW	CG N
0.85	21.590	72246S	0.75 19.050	0.680 17.272	71.00 12.425	0.320 8.128	23.000 102.304	0.340 8.64	0.085 2.16	4.00	SST	CG N
0.85	21.590	72233S	0.75 19.050	0.688 17.475	58.00 10.150	0.355 9.017	21.000 93.408	0.324 8.23	0.082 2.08	3.90	SST	CG N
0.85	21.590	72137	0.88 22.352	0.750 19.050	11.00 1.925	0.690 17.526	7.500 33.360	0.180 4.57	0.050 1.27	3.63	MW	CG N
0.85	21.590	72137S	0.88 22.352	0.750 19.050	9.20 1.610	0.550 13.970	5.100 22.685	0.180 4.57	0.050 1.27	3.63	SST	CG N
0.85	21.590	72147	0.88 22.352	0.740 18.796	15.00 2.625	0.660 16.764	9.900 44.035	0.210 5.33	0.055 1.40	3.75	MW	CG N
0.85	21.590	72147S	0.88 22.352	0.740 18.796	13.00 2.275	0.520 13.208	6.700 29.802	0.210 5.33	0.055 1.40	3.75	SST	CG N
0.85	21.590	72163	0.88 22.352	0.716 18.186	28.00 4.900	0.600 15.240	17.000 75.616	0.280 7.11	0.067 1.70	4.13	MW	CG N
0.85	21.590	72163S	0.88 22.352	0.716 18.186	24.00 4.200	0.500 12.700	12.000 53.376	0.280 7.11	0.067 1.70	4.13	SST	CG N
0.85	21.590	72173	0.88 22.352	0.714 18.136	30.00 5.250	0.600 15.240	18.000 80.064	0.280 7.11	0.068 1.73	4.13	MW	CG N
0.85	21.590	72173S	0.88 22.352	0.714 18.136	25.00 4.375	0.500 12.700	13.000 57.824	0.280 7.11	0.068 1.73	4.13	SST	CG N
0.85	21.590	72186	0.88 22.352	0.706 17.932	41.00 7.175	0.520 13.208	21.000 93.408	0.290 7.37	0.072 1.83	4.00	MW	CG N
0.85	21.590	72186S	0.88 22.352	0.706 17.932	35.00 6.125	0.410 10.414	14.000 62.272	0.290 7.37	0.072 1.83	4.00	SST	CG N
0.85	21.590	72195	0.88 22.352	0.702 17.831	40.00 7.000	0.570 14.478	23.000 102.304	0.310 7.87	0.074 1.88	4.25	MW	CG N
0.85	21.590	72195S	0.88 22.352	0.702 17.831	34.00 5.950	0.450 11.430	15.000 66.720	0.310 7.87	0.074 1.88	4.25	SST	CG N
0.85	21.590	72212	0.88 22.352	0.690 17.526	55.00 9.625	0.520 13.208	29.000 128.992	0.350 8.89	0.080 2.03	4.38	MW	CG N
0.85	21.590	72212S	0.88 22.352	0.690 17.526	47.00 8.225	0.410 10.414	19.000 84.512	0.350 8.89	0.080 2.03	4.38	SST	CG N
0.85	21.590	72234	0.88 22.352	0.688 17.475	57.00 9.975	0.530 13.462	30.000 133.440	0.350 8.89	0.081 2.06	4.38	MW	CG N
0.85	21.590	72234S	0.88 22.352	0.688 17.475	48.00 8.400	0.429 10.897	21.000 93.408	0.377 9.58	0.082 2.08	4.60	SST	CG N
0.85	21.590	72247	0.88 22.352	0.680 17.272	67.00 11.725	0.500 12.700	33.000 146.784	0.380 9.65	0.085 2.16	4.50	MW	CG N
0.85	21.590	72247S	0.88 22.352	0.680 17.272	57.00 9.975	0.410 10.414	23.000 102.304	0.380 9.65	0.085 2.16	4.50	SST	CG N
0.85	21.590	72262	0.88 22.352	0.668 16.967	90.00 15.750	0.450 11.430	40.000 177.920	0.410 10.41	0.091 2.31	4.50	MW	CG N
0.85	21.590	72262S	0.88 22.352	0.668 16.967	76.00 13.300	0.350 8.890	27.000 120.096	0.410 10.41	0.091 2.31	4.50	SST	CG N
0.85	21.590	72276	0.88 22.352	0.666 16.916	90.00 15.750	0.450 11.430	41.000 182.368	0.430 10.92	0.092 2.34	4.63	MW	CG N
0.85	21.590	72276S	0.88 22.352	0.666 16.916	77.00 13.475	0.360 9.144	28.000 124.544	0.430 10.92	0.092 2.34	4.63	SST	CG N
0.85	21.590	72138	1.00 25.400	0.750 19.050	9.40 1.645	0.800 20.320	7.500 33.360	0.190 4.83	0.050 1.27	3.88	MW	CG N
0.85	21.590	72138S	1.00 25.400	0.750 19.050	8.00 1.400	0.640 16.256	5.100 22.685	0.190 4.83	0.050 1.27	3.88	SST	CG N
0.85	21.590	72148	1.00 25.400	0.740 18.796	13.00 2.275	0.770 19.558	9.900 44.035	0.220 5.59	0.055 1.40	4.00	MW	CG N
0.85	21.590	72148S	1.00 25.400	0.740 18.796	11.00 1.925	0.610 15.494	6.700 29.802	0.220 5.59	0.055 1.40	4.00	SST	CG N
0.85	21.590	72164	1.00 25.400	0.716 18.186	24.00 4.200	0.700 17.780	17.000 75.616	0.300 7.62	0.067 1.70	4.50	MW	CG N
0.85	21.590	72164S	1.00 25.400	0.716 18.186	21.00 3.675	0.580 14.732	12.000 53.376	0.300 7.62	0.067 1.70	4.50	SST	CG N
0.85	21.590	72174	1.00 25.400	0.714 18.136	26.00 4.550	0.690 17.526	18.000 80.064	0.310 7.87	0.068 1.73	4.50	MW	CG N
0.85	21.590	72174S	1.00 25.400	0.714 18.136	22.00 3.850	0.580 14.732	13.000 57.824	0.310 7.87	0.068 1.73	4.50	SST	CG N
0.85	21.590	72187	1.00 25.400	0.706 17.932	35.00 6.125	0.600 15.240	21.000 93.408	0.320 8.13	0.072 1.83	4.38	MW	CG N
0.85	21.590	72187S	1.00 25.400	0.706 17.932	30.00 5.250	0.480 12.192	14.000 62.272	0.320 8.13	0.072 1.83	4.38	SST	CG N
0.85	21.590	72196	1.00 25.400	0.702 17.831	34.00 5.950	0.650 16.510	22.000 97.856	0.350 8.89	0.074 1.88	4.75	MW	CG N
0.85	21.590	72196S	1.00 25.400	0.702 17.831	29.00 5.075	0.530 13.462	15.000 66.720	0.350 8.89	0.074 1.88	4.75	SST	CG N
0.85	21.590	72214	1.00 25.400	0.690 17.526	47.00 8.225	0.620 15.748	29.000 128.992	0.380 9.65	0.080 2.03	4.75	MW	CG N
0.85	21.590	72214S	1.00 25.400	0.690 17.526	40.00 7.000	0.490 12.446	19.000 84.512	0.380 9.65	0.080 2.03	4.75	SST	CG N
0.85	21.590	72235	1.00 25.400	0.688 17.475	48.00 8.400	0.610 15.494	29.000 128.992	0.390 9.91	0.081 2.06	4.88	MW	CG N
0.85	21.590	72235S	1.00 25.400	0.688 17.475	41.00 7.175	0.502 12.751	21.000 93.408	0.405 10.29	0.082 2.08	4.90	SST	CG N
0.85	21.590	72248	1.00 25.400	0.680 17.272	59.00 10.325	0.580 14.732	34.000 151.232	0.410 10.41	0.085 2.16	4.88	MW	CG N
0.85	21.590	72248S	1.00 25.400	0.680 17.272	50.00 8.750	0.460 11.684	23.000 102.304	0.410 10.41	0.085 2.16	4.88	SST	CG N
0.85	21.590	72264	1.00 25.400	0.668 16.967	76.00 13.300	0.530 13.462	40.000 177.920	0.460 11.68	0.091 2.31	5.00	MW	CG N
0.85	21.590	72264S	1.00 25.400	0.668 16.967	65.00 11.375	0.410 10.414	27.000 120.096	0.460 11.68	0.091 2.31	5.00	SST	CG N
0.85	21.590	72277	1.00 25.400	0.666 16.916	77.00 13.475	0.530 13.462	41.000 182.368	0.470 11.94	0.092 2.34	5.13	MW	CG N
0.85	21.590	72277S	1.00 25.400	0.666 16.916	65.00 11.375	0.420 10.668	28.000 124.544	0.470 11.94	0.092 2.34	5.13	SST	CG N
0.85	21.590	72287	1.00 25.400	0.654 16.612	100.00 17.500	0.500 12.700	50.000 222.400	0.500 12.70	0.098 2.49	5.13	MW	CG N
0.85	21.590	72287S	1.00 25.400	0.654 16.612	85.00 14.875	0.390 9.906	33.000 146.784	0.500 12.70	0.098 2.49	5.13	SST	CG N
0.85	21.590	72297	1.00 25.400	0.650 16.510	125.00 21.875	0.430 10.922	53.000 235.744	0.480 12.19	0.100 2.54	4.75	MW	CG N
0.85	21.590	72297S	1.00 25.400	0.650 16.510	106.00 18.550	0.330 8.382	35.000 155.680	0.480 12.19	0.100 2.54	4.75	SST	CG N
0.85	21.590	72308	1.00 25.400	0.640 16.256	135.00 23.625	0.460 11.684	62.000 275.776	0.540 13.72	0.105 2.67	5.13	MW	CG N
0.85	21.590	72308S	1.00 25.400	0.640 16.256	115.00 20.125	0.360 9.144	41.000 182.368	0.540 13.72	0.105 2.67	5.13	SST	CG N
0.85	21.590	72139	1.25 31.750	0.750 19.050	7.30 1.278	1.000 25.400	7.500 33.360	0.220 5.59	0.050 1.27	4.38	MW	CG N
0.85	21.590	72139S	1.25 31.750	0.750 19.050	6.20 1.085	0.810 20.574	5.100 22.685	0.220 5.59	0.050 1.27	4.38	SST	CG N
0.85	21.590	72149	1.25 31.750	0.740 18.796	10.00 1.750	0.980 24.892	9.900 44.035	0.250 6.35	0.055 1.40	4.63	MW	CG N
0.85	21.590	72149S	1.25 31.750	0.740 18.796	8.60 1.505	0.780 19.812	6.700 29.802	0.250 6.35	0.055 1.40	4.63	SST	CG N
0.85	21.590	72165	1.25 31.750	0.716 18.186	19.00 3.325	0.900 22.860	17.000 75.616	0.350 8.89	0.067 1.70	5.25	MW	CG N
0.85	21.590	72165S	1.25 31.750	0.716 18.186	16.00 2.800	0.750 19.050	12.000 53.376	0.350 8.89	0.067 1.70	5.25	SST	CG N
0.85	21.590	72175										




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
0.85	21.590	72298	1.25 31.750	0.650 16.510	95.00 16.625	0.560 14.224	53.000 235.744	0.560 14.22	0.100 2.54	5.63	MW CG	N
0.85	21.590	72298S	1.25 31.750	0.650 16.510	81.00 14.175	0.440 11.176	35.000 155.680	0.560 14.22	0.100 2.54	5.63	SST CG	N
0.85	21.590	72310	1.25 31.750	0.640 16.256	103.00 18.025	0.600 15.240	62.000 275.776	0.640 16.26	0.105 2.67	6.13	MW CG	N
0.85	21.590	72310S	1.25 31.750	0.640 16.256	87.00 15.225	0.470 11.938	41.000 182.368	0.640 16.26	0.105 2.67	6.13	SST CG	N
0.85	21.590	72237	1.38 35.052	0.688 17.475	34.00 5.950	0.880 22.352	30.000 133.440	0.490 12.45	0.081 2.06	6.00	MW CG	N
0.85	21.590	72237S	1.38 35.052	0.688 17.475	29.00 5.075	0.710 18.034	21.000 93.408	0.517 13.13	0.082 2.08	6.30	SST CG	N
0.85	21.590	72250	1.38 35.052	0.680 17.272	42.00 7.350	0.820 20.828	34.000 151.232	0.510 12.95	0.085 2.16	6.00	MW CG	N
0.85	21.590	72250S	1.38 35.052	0.680 17.272	36.00 6.300	0.650 16.510	23.000 102.304	0.510 12.95	0.085 2.16	6.00	SST CG	N
0.85	21.590	72140	1.50 38.100	0.750 19.050	6.00 1.050	1.200 30.480	7.500 33.360	0.240 6.10	0.050 1.27	4.88	MW CG	N
0.85	21.590	72140S	1.50 38.100	0.750 19.050	5.10 0.893	0.990 25.146	5.100 22.685	0.240 6.10	0.050 1.27	4.88	SST CG	N
0.85	21.590	72150	1.50 38.100	0.740 18.796	8.30 1.453	1.200 30.480	9.900 44.035	0.280 7.11	0.055 1.40	5.13	MW CG	N
0.85	21.590	72150S	1.50 38.100	0.740 18.796	7.10 1.243	0.950 24.130	6.700 29.802	0.280 7.11	0.055 1.40	5.13	SST CG	N
0.85	21.590	72166	1.50 38.100	0.716 18.186	15.00 2.625	1.100 27.940	17.000 75.616	0.390 9.91	0.067 1.70	5.88	MW CG	N
0.85	21.590	72166S	1.50 38.100	0.716 18.186	13.00 2.275	0.920 23.368	12.000 53.376	0.390 9.91	0.067 1.70	5.88	SST CG	N
0.85	21.590	72176	1.50 38.100	0.714 18.136	16.00 2.800	1.100 27.940	18.000 80.064	0.410 10.41	0.068 1.73	6.00	MW CG	N
0.85	21.590	72176S	1.50 38.100	0.714 18.136	14.00 2.450	0.920 23.368	13.000 57.824	0.410 10.41	0.068 1.73	6.00	SST CG	N
0.85	21.590	72189	1.50 38.100	0.706 17.932	22.00 3.850	0.970 24.638	21.000 93.408	0.410 10.41	0.072 1.83	5.75	MW CG	N
0.85	21.590	72189S	1.50 38.100	0.706 17.932	19.00 3.325	0.760 19.304	14.000 62.272	0.410 10.41	0.072 1.83	5.75	SST CG	N
0.85	21.590	72198	1.50 38.100	0.702 17.831	22.00 3.850	1.000 25.400	22.000 97.856	0.460 11.68	0.074 1.88	6.25	MW CG	N
0.85	21.590	72198S	1.50 38.100	0.702 17.831	18.00 3.150	0.830 21.082	15.000 66.720	0.460 11.68	0.074 1.88	6.25	SST CG	N
0.85	21.590	72218	1.50 38.100	0.690 17.526	29.00 5.075	0.980 24.892	29.000 128.992	0.510 12.95	0.080 2.03	6.38	MW CG	N
0.85	21.590	72218S	1.50 38.100	0.690 17.526	25.00 4.375	0.770 19.558	19.000 84.512	0.510 12.95	0.080 2.03	6.38	SST CG	N
0.85	21.590	72238	1.50 38.100	0.688 17.475	30.00 5.250	0.970 24.638	30.000 133.440	0.530 13.46	0.081 2.06	6.50	MW CG	N
0.85	21.590	72238S	1.50 38.100	0.688 17.475	26.00 4.550	0.791 20.091	21.000 93.408	0.558 14.17	0.082 2.08	6.80	SST CG	N
0.85	21.590	72251	1.50 38.100	0.680 17.272	37.00 6.475	0.940 23.876	34.000 151.232	0.560 14.22	0.085 2.16	6.63	MW CG	N
0.85	21.590	72251S	1.50 38.100	0.680 17.272	31.00 5.425	0.740 18.796	23.000 102.304	0.560 14.22	0.085 2.16	6.63	SST CG	N
0.85	21.590	72267	1.50 38.100	0.668 16.967	49.00 8.575	0.830 21.082	40.000 177.920	0.600 15.24	0.091 2.31	6.63	MW CG	N
0.85	21.590	72267S	1.50 38.100	0.668 16.967	42.00 7.350	0.640 16.256	27.000 120.096	0.600 15.24	0.091 2.31	6.63	SST CG	N
0.85	21.590	72279	1.50 38.100	0.666 16.916	48.00 8.400	0.860 21.844	41.000 182.368	0.640 16.26	0.092 2.34	7.00	MW CG	N
0.85	21.590	72279S	1.50 38.100	0.666 16.916	41.00 7.175	0.680 17.272	28.000 124.544	0.640 16.26	0.092 2.34	7.00	SST CG	N
0.85	21.590	72289	1.50 38.100	0.654 16.612	63.00 11.025	0.800 20.320	50.000 222.400	0.690 17.53	0.098 2.49	7.00	MW CG	N
0.85	21.590	72289S	1.50 38.100	0.654 16.612	53.00 9.275	0.620 15.748	33.000 146.784	0.690 17.53	0.098 2.49	7.00	SST CG	N
0.85	21.590	72299	1.50 38.100	0.650 16.510	77.00 13.475	0.690 17.526	53.000 235.744	0.650 16.51	0.100 2.54	6.50	MW CG	N
0.85	21.590	72299S	1.50 38.100	0.650 16.510	65.00 11.375	0.540 13.716	35.000 155.680	0.650 16.51	0.100 2.54	6.50	SST CG	N
0.85	21.590	72312	1.50 38.100	0.640 16.256	83.00 14.525	0.740 18.796	62.000 275.776	0.750 19.05	0.105 2.67	7.13	MW CG	N
0.85	21.590	72312S	1.50 38.100	0.640 16.256	70.00 12.250	0.580 14.732	41.000 182.368	0.750 19.05	0.105 2.67	7.13	SST CG	N
0.85	21.590	72152	1.75 44.450	0.740 18.796	7.10 1.243	1.400 35.560	9.900 44.035	0.320 8.13	0.055 1.40	5.75	MW CG	N
0.85	21.590	72152S	1.75 44.450	0.740 18.796	6.00 1.050	1.100 27.940	6.700 29.802	0.320 8.13	0.055 1.40	5.75	SST CG	N
0.85	21.590	72177	1.75 44.450	0.714 18.136	14.00 2.450	1.300 33.020	18.000 80.064	0.460 11.68	0.068 1.73	6.75	MW CG	N
0.85	21.590	72177S	1.75 44.450	0.714 18.136	12.00 2.100	1.100 27.940	13.000 57.824	0.460 11.68	0.068 1.73	6.75	SST CG	N
0.85	21.590	72190	1.75 44.450	0.706 17.932	18.00 3.150	1.100 27.940	21.000 93.408	0.470 11.94	0.072 1.83	6.50	MW CG	N
0.85	21.590	72190S	1.75 44.450	0.706 17.932	16.00 2.800	0.910 23.114	14.000 62.272	0.470 11.94	0.072 1.83	6.50	SST CG	N
0.85	21.590	72200	1.75 44.450	0.702 17.831	19.00 3.325	1.200 30.480	23.000 102.304	0.510 12.95	0.074 1.88	6.88	MW CG	N
0.85	21.590	72200S	1.75 44.450	0.702 17.831	16.00 2.800	0.950 24.130	15.000 66.720	0.510 12.95	0.074 1.88	6.88	SST CG	N
0.85	21.590	72220	1.75 44.450	0.690 17.526	25.00 4.375	1.200 30.480	29.000 128.992	0.580 14.73	0.080 2.03	7.25	MW CG	N
0.85	21.590	72220S	1.75 44.450	0.690 17.526	21.00 3.675	0.920 23.368	19.000 84.512	0.580 14.73	0.080 2.03	7.25	SST CG	N
0.85	21.590	72239	1.75 44.450	0.688 17.475	26.00 4.550	1.200 30.480	29.000 128.992	0.600 15.24	0.081 2.06	7.38	MW CG	N
0.85	21.590	72239S	1.75 44.450	0.688 17.475	22.00 3.850	0.935 23.749	21.000 93.408	0.629 15.98	0.082 2.08	7.70	SST CG	N
0.85	21.590	72252	1.75 44.450	0.680 17.272	31.00 5.425	1.100 27.940	34.000 151.232	0.630 16.00	0.085 2.16	7.38	MW CG	N
0.85	21.590	72252S	1.75 44.450	0.680 17.272	26.00 4.550	0.880 23.352	23.000 102.304	0.630 16.00	0.085 2.16	7.38	SST CG	N
0.85	21.590	72268	1.75 44.450	0.668 16.967	41.00 7.175	0.990 25.146	40.000 177.920	0.680 15.24	0.091 2.31	7.50	MW CG	N
0.85	21.590	72268S	1.75 44.450	0.668 16.967	35.00 6.125	0.770 19.558	27.000 120.096	0.680 17.27	0.091 2.31	7.50	SST CG	N
0.85	21.590	72280	1.75 44.450	0.666 16.916	40.00 7.000	1.000 25.400	41.000 182.368	0.720 18.29	0.092 2.34	7.88	MW CG	N
0.85	21.590	72280S	1.75 44.450	0.666 16.916	34.00 5.950	0.810 20.574	28.000 124.544	0.720 18.29	0.092 2.34	7.88	SST CG	N
0.85	21.590	72290	1.75 44.450	0.654 16.612	53.00 9.275	0.960 24.384	50.000 222.400	0.770 19.56	0.098 2.49	7.88	MW CG	N
0.85	21.590	72290S	1.75 44.450	0.654 16.612	45.00 7.875	0.750 19.050	33.000 146.784	0.770 19.56	0.098 2.49	7.88	SST CG	N
0.85	21.590	72300	1.75 44.450	0.650 16.510	64.00 11.200	0.830 21.082	53.000 235.744	0.730 18.54	0.100 2.54	7.25	MW CG	N
0.85	21.590	72300S	1.75 44.450	0.650 16.510	55.00 9.625	0.650 16.510	35.000 155.680	0.730 18.54	0.100 2.54	7.25	SST CG	N
0.85	21.590	72314	1.75 44.450	0.640 16.256	69.00 12.075	0.890 22.606	62.000 275.776	0.850 21.59	0.105 2.67	8.13	MW CG	N
0.85	21.590	72314S	1.75 44.450	0.640 16.256	59.00 10.325	0.690 17.526	41.000 182.368	0.850 21.59	0.105 2.67	8.13	SST CG	N
0.85	21.590	72141	2.00 50.800	0.750 19.050	4.40 0.770	1.700 43.180	7.500 33.360	0.300 7.62	0.050 1.27	6.00	MW CG	N
0.85	21.590	72141S	2.00 50.800	0.750 19.050	3.80 0.665	1.300 33.020	5.100 22.685	0.300 7.62	0.050 1.27	6.00	SST CG	N
0.85	21.590	72153	2.00 50.800	0.740 18.796	6.10 1.068	1						




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fins h
0.85	21.590	72281	2.00 50.800	0.666 16.916	35.00 6.125	1.200 30.480	41.000 182.368	0.820 20.83	0.092 2.34	8.88	MW	CG N
0.85	21.590	72281S	2.00 50.800	0.666 16.916	29.00 5.075	0.940 23.876	28.000 124.544	0.820 20.83	0.092 2.34	8.88	SST	CG N
0.85	21.590	72291	2.00 50.800	0.654 16.612	45.00 7.875	1.100 27.940	50.000 222.400	0.870 22.10	0.098 2.49	8.88	MW	CG N
0.85	21.590	72291S	2.00 50.800	0.654 16.612	38.00 6.650	0.870 22.098	33.000 146.784	0.870 22.10	0.098 2.49	8.88	SST	CG N
0.85	21.590	72301	2.00 50.800	0.650 16.510	55.00 9.625	0.960 24.384	53.000 235.744	0.810 20.57	0.100 2.54	8.13	MW	CG N
0.85	21.590	72301S	2.00 50.800	0.650 16.510	47.00 8.225	0.750 19.050	35.000 155.680	0.810 20.57	0.100 2.54	8.13	SST	CG N
0.85	21.590	72316	2.00 50.800	0.640 16.256	60.00 10.500	1.000 25.400	62.000 275.776	0.960 24.38	0.105 2.67	9.13	MW	CG N
0.85	21.590	72316S	2.00 50.800	0.640 16.256	51.00 8.925	0.800 20.320	41.000 182.368	0.960 24.38	0.105 2.67	9.13	SST	CG N
0.85	21.590	72155	2.25 57.150	0.740 18.796	5.40 0.945	1.800 45.720	9.900 44.035	0.380 9.65	0.055 1.40	6.88	MW	CG N
0.85	21.590	72155S	2.25 57.150	0.740 18.796	4.60 0.805	1.500 38.100	6.700 29.802	0.380 9.65	0.055 1.40	6.88	SST	CG N
0.85	21.590	72179	2.25 57.150	0.714 18.136	10.00 1.750	1.700 43.180	18.000 80.064	0.550 13.97	0.068 1.73	8.13	MW	CG N
0.85	21.590	72179S	2.25 57.150	0.714 18.136	8.80 1.540	1.400 35.560	13.000 57.824	0.550 13.97	0.068 1.73	8.13	SST	CG N
0.85	21.590	72203	2.25 57.150	0.702 17.831	14.00 2.450	1.600 40.640	23.000 102.304	0.620 15.75	0.074 1.88	8.38	MW	CG N
0.85	21.590	72203S	2.25 57.150	0.702 17.831	12.00 2.100	1.300 33.020	15.000 66.720	0.620 15.75	0.074 1.88	8.38	SST	CG N
0.85	21.590	72224	2.25 57.150	0.690 17.526	19.00 3.325	1.500 38.100	29.000 128.992	0.710 18.03	0.080 2.03	8.88	MW	CG N
0.85	21.590	72224S	2.25 57.150	0.690 17.526	16.00 2.800	1.200 30.480	19.000 84.512	0.710 18.03	0.080 2.03	8.88	SST	CG N
0.85	21.590	72241	2.25 57.150	0.688 17.475	19.00 3.325	1.500 38.100	29.000 128.992	0.730 18.54	0.081 2.06	9.00	MW	CG N
0.85	21.590	72241S	2.25 57.150	0.688 17.475	16.00 2.800	1.286 32.664	21.000 93.408	0.803 20.40	0.082 2.08	9.80	SST	CG N
0.85	21.590	72254	2.25 57.150	0.680 17.272	23.00 4.025	1.500 38.100	34.000 151.232	0.780 19.81	0.085 2.16	9.13	MW	CG N
0.85	21.590	72254S	2.25 57.150	0.680 17.272	20.00 3.500	1.200 30.480	23.000 102.304	0.780 19.81	0.085 2.16	9.13	SST	CG N
0.85	21.590	72270	2.25 57.150	0.668 16.967	31.00 5.425	1.300 33.020	40.000 177.920	0.840 21.34	0.091 2.31	9.25	MW	CG N
0.85	21.590	72270S	2.25 57.150	0.668 16.967	26.00 4.550	1.000 25.400	27.000 120.096	0.840 21.34	0.091 2.31	9.25	SST	CG N
0.85	21.590	72282	2.25 57.150	0.666 16.916	30.00 5.250	1.400 35.560	41.000 182.368	0.900 22.86	0.092 2.34	9.75	MW	CG N
0.85	21.590	72282S	2.25 57.150	0.666 16.916	26.00 4.550	1.100 27.940	28.000 124.544	0.900 22.86	0.092 2.34	9.75	SST	CG N
0.85	21.590	72292	2.25 57.150	0.654 16.612	39.00 6.825	1.300 33.020	50.000 222.400	0.970 24.64	0.098 2.49	9.88	MW	CG N
0.85	21.590	72292S	2.25 57.150	0.654 16.612	33.00 5.775	1.000 25.400	33.000 146.784	0.970 24.64	0.098 2.49	9.88	SST	CG N
0.85	21.590	72302	2.25 57.150	0.650 16.510	49.00 8.575	1.100 27.940	53.000 235.744	0.900 22.86	0.100 2.54	9.00	MW	CG N
0.85	21.590	72302S	2.25 57.150	0.650 16.510	41.00 7.175	0.850 21.590	35.000 155.680	0.900 22.86	0.100 2.54	9.00	SST	CG N
0.85	21.590	72318	2.25 57.150	0.640 16.256	52.00 9.100	1.200 30.480	62.000 275.776	1.060 16.26	0.105 2.67	10.10	MW	CG N
0.85	21.590	72318S	2.25 57.150	0.640 16.256	44.00 7.700	0.920 23.368	41.000 182.368	1.060 26.92	0.105 2.67	10.10	SST	CG N
0.85	21.590	72142	2.50 63.500	0.750 19.050	3.50 0.613	2.100 53.340	7.500 33.360	0.350 8.89	0.050 1.27	7.00	MW	CG N
0.85	21.590	72142S	2.50 63.500	0.750 19.050	3.00 0.525	1.700 43.180	5.100 22.685	0.350 8.89	0.050 1.27	7.00	SST	CG N
0.85	21.590	72156	2.50 63.500	0.740 18.796	4.80 0.840	2.100 53.340	9.900 44.035	0.410 10.41	0.055 1.40	7.38	MW	CG N
0.85	21.590	72156S	2.50 63.500	0.740 18.796	4.10 0.718	1.600 40.640	6.700 29.802	0.410 10.41	0.055 1.40	7.38	SST	CG N
0.85	21.590	72168	2.50 63.500	0.716 18.186	8.90 1.558	1.900 48.260	17.000 75.616	0.590 14.99	0.067 1.70	8.75	MW	CG N
0.85	21.590	72180	2.50 63.500	0.714 18.136	9.30 1.628	1.900 48.260	18.000 80.064	0.600 15.24	0.068 1.73	8.88	MW	CG N
0.85	21.590	72180S	2.50 63.500	0.714 18.136	7.90 1.383	1.600 40.640	13.000 57.824	0.600 15.24	0.068 1.73	8.88	SST	CG N
0.85	21.590	72192	2.50 63.500	0.706 17.932	12.00 2.100	1.700 43.180	21.000 93.408	0.620 15.75	0.072 1.83	8.63	MW	CG N
0.85	21.590	72192S	2.50 63.500	0.706 17.932	11.00 1.925	1.300 33.020	14.000 62.272	0.620 15.75	0.072 1.83	8.63	SST	CG N
0.85	21.590	72204	2.50 63.500	0.702 17.831	12.00 2.100	1.800 45.720	22.000 97.856	0.700 17.78	0.074 1.88	9.50	MW	CG N
0.85	21.590	72204S	2.50 63.500	0.702 17.831	11.00 1.925	1.500 38.100	15.000 66.720	0.700 17.78	0.074 1.88	9.50	SST	CG N
0.85	21.590	72226	2.50 63.500	0.690 17.526	17.00 2.975	1.700 43.180	29.000 128.992	0.770 19.56	0.080 2.03	9.63	MW	CG N
0.85	21.590	72226S	2.50 63.500	0.690 17.526	14.00 2.450	2.450 35.560	19.000 84.512	0.770 19.56	0.080 2.03	9.63	SST	CG N
0.85	21.590	72242	2.50 63.500	0.688 17.475	15.00 2.625	1.372 34.849	21.000 93.408	0.846 21.49	0.080 2.03	9.50	SST	CG N
0.85	21.590	72242S	2.50 63.500	0.688 17.475	17.00 2.975	1.700 43.180	29.000 128.992	0.800 20.32	0.081 2.06	9.88	MW	CG N
0.85	21.590	72255	2.50 63.500	0.680 17.272	21.00 3.675	1.700 43.180	34.000 151.232	0.850 21.59	0.085 2.16	10.00	MW	CG N
0.85	21.590	72255S	2.50 63.500	0.680 17.272	18.00 3.150	1.300 33.020	23.000 102.304	0.850 21.59	0.085 2.16	10.00	SST	CG N
0.85	21.590	72271	2.50 63.500	0.668 16.967	28.00 4.900	1.400 35.560	40.000 177.920	0.910 23.11	0.091 2.31	10.00	MW	CG N
0.85	21.590	72271S	2.50 63.500	0.668 16.967	24.00 4.200	1.100 27.940	27.000 120.096	0.910 23.11	0.091 2.31	10.00	SST	CG N
0.85	21.590	72283	2.50 63.500	0.666 16.916	27.00 4.725	1.500 38.100	41.000 182.368	0.990 25.15	0.092 2.34	10.80	MW	CG N
0.85	21.590	72283S	2.50 63.500	0.666 16.916	23.00 4.025	1.200 30.480	28.000 124.544	0.990 25.15	0.092 2.34	10.80	SST	CG N
0.85	21.590	72293	2.50 63.500	0.654 16.612	35.00 6.125	1.600 35.560	50.000 222.400	1.070 27.18	0.098 2.49	10.90	MW	CG N
0.85	21.590	72293S	2.50 63.500	0.654 16.612	30.00 5.250	1.100 27.940	33.000 146.784	1.070 27.18	0.098 2.49	10.90	SST	CG N
0.85	21.590	72303	2.50 63.500	0.650 16.510	43.00 7.525	1.200 30.480	53.000 235.744	0.990 25.15	0.100 2.54	9.88	MW	CG N
0.85	21.590	72303S	2.50 63.500	0.650 16.510	37.00 6.475	1.475 24.384	35.000 155.680	0.990 25.15	0.100 2.54	9.88	SST	CG N
0.85	21.590	72320	2.50 63.500	0.640 16.256	47.00 8.225	1.300 33.020	62.000 275.776	1.170 29.72	0.105 2.67	11.10	MW	CG N
0.85	21.590	72320S	2.50 63.500	0.640 16.256	40.00 7.000	1.000 25.400	41.000 182.368	1.170 29.72	0.105 2.67	11.10	SST	CG N
0.85	21.590	72158	2.75 69.850	0.740 18.796	4.40 0.770	2.300 58.420	9.900 44.035	0.440 11.18	0.055 1.40	8.00	MW	CG N
0.85	21.590	72158S	2.75 69.850	0.740 18.796	3.70 0.648	1.800 45.720	6.700 29.802	0.440 11.18	0.055 1.40	8.00	SST	CG N
0.85	21.590	72182	2.75 69.850	0.714 18.136	8.70 1.523	2.100 53.340	18.000 80.064	0.640 16.26	0.068 1.73	9.38	MW	CG N
0.85	21.590	72182S	2.75 69.850	0.714 18.136	7.40 1.295	1.700 43.180	13.000 57.824	0.640 16.26	0.068 1.73	9.38	SST	CG N
0.85	21.590	72206	2.75 69.850	0.702 17.831	12.00 2.100	2.000 50.800	23.000 102.304	0.740 18.80	0.074 1.88	10.00		




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
0.85	21.590	72143	3.00 76.200	0.750 19.050	2.90 0.508	2.600 66.040	7.500 33.360	0.400 10.16	0.050 1.27	8.00	MW CG	N
0.85	21.590	72143S	3.00 76.200	0.750 19.050	2.50 0.438	2.000 50.800	5.100 22.685	0.400 10.16	0.050 1.27	8.00	SST CG	N
0.85	21.590	72159	3.00 76.200	0.740 18.796	4.00 0.700	2.500 63.500	9.900 44.035	0.470 11.94	0.055 1.40	8.50	MW CG	N
0.85	21.590	72159S	3.00 76.200	0.740 18.796	3.40 0.595	2.000 50.800	6.700 29.802	0.470 11.94	0.055 1.40	8.50	SST CG	N
0.85	21.590	72169	3.00 76.200	0.716 18.186	7.30 1.278	2.300 58.420	17.000 75.616	0.690 17.53	0.067 1.70	10.30	MW CG	N
0.85	21.590	72169S	3.00 76.200	0.716 18.186	6.20 1.085	1.900 48.260	12.000 53.376	0.690 17.53	0.067 1.70	10.30	SST CG	N
0.85	21.590	72183	3.00 76.200	0.714 18.136	7.70 1.348	2.300 58.420	18.000 80.064	0.710 18.03	0.068 1.73	10.40	MW CG	N
0.85	21.590	72183S	3.00 76.200	0.714 18.136	6.50 1.138	1.900 48.260	13.000 57.824	0.710 18.03	0.068 1.73	10.40	SST CG	N
0.85	21.590	72193	3.00 76.200	0.706 17.932	10.00 1.750	2.000 50.800	21.000 93.408	0.710 18.03	0.072 1.83	9.88	MW CG	N
0.85	21.590	72193S	3.00 76.200	0.706 17.932	8.80 1.540	1.600 40.640	14.000 62.272	0.710 18.03	0.072 1.83	9.88	SST CG	N
0.85	21.590	72207	3.00 76.200	0.702 17.831	10.00 1.750	2.200 55.880	22.000 97.856	0.810 20.57	0.074 1.88	11.00	MW CG	N
0.85	21.590	72207S	3.00 76.200	0.702 17.831	8.70 1.523	1.800 45.720	15.000 66.720	0.810 20.57	0.074 1.88	11.00	SST CG	N
0.85	21.590	72230	3.00 76.200	0.690 17.526	14.00 2.450	2.100 53.340	29.000 128.992	0.900 22.86	0.080 2.03	11.30	MW CG	N
0.85	21.590	72230S	3.00 76.200	0.690 17.526	12.00 2.100	1.600 40.640	19.000 84.512	0.900 22.86	0.080 2.03	11.30	SST CG	N
0.85	21.590	72244	3.00 76.200	0.688 17.475	14.00 2.450	2.100 53.340	29.000 128.992	0.930 23.62	0.081 2.06	11.50	MW CG	N
0.85	21.590	72244S	3.00 76.200	0.688 17.475	12.00 2.100	1.715 43.561	21.000 93.408	0.107 25.83	0.082 2.08	12.40	SST CG	N
0.85	21.590	72257	3.00 76.200	0.680 17.272	17.00 2.975	2.000 50.800	34.000 151.232	0.990 25.15	0.085 2.16	11.60	MW CG	N
0.85	21.590	72257S	3.00 76.200	0.680 17.272	15.00 2.625	1.600 40.640	23.000 102.304	0.990 25.15	0.085 2.16	11.60	SST CG	N
0.85	21.590	72273	3.00 76.200	0.668 16.967	23.00 4.025	1.800 45.720	40.000 177.920	1.070 27.18	0.091 2.31	11.80	MW CG	N
0.85	21.590	72273S	3.00 76.200	0.668 16.967	20.00 3.500	1.400 35.560	27.000 120.096	1.070 27.18	0.091 2.31	11.80	SST CG	N
0.85	21.590	72285	3.00 76.200	0.666 16.916	22.00 3.850	1.800 45.720	41.000 182.368	1.160 29.46	0.092 2.34	12.60	MW CG	N
0.85	21.590	72285S	3.00 76.200	0.666 16.916	19.00 3.325	1.500 38.100	28.000 124.544	1.160 29.46	0.092 2.34	12.60	SST CG	N
0.85	21.590	72295	3.00 76.200	0.654 16.612	29.00 5.075	1.700 43.180	50.000 222.400	1.250 31.75	0.098 2.49	12.80	MW CG	N
0.85	21.590	72295S	3.00 76.200	0.654 16.612	25.00 4.375	1.400 35.560	33.000 146.784	1.250 31.75	0.098 2.49	12.80	SST CG	N
0.85	21.590	72305	3.00 76.200	0.650 16.510	36.00 6.300	1.500 38.100	53.000 235.744	1.160 29.46	0.100 2.54	11.60	MW CG	N
0.85	21.590	72305S	3.00 76.200	0.650 16.510	30.00 5.250	1.200 30.480	35.000 155.680	1.160 29.46	0.100 2.54	11.60	SST CG	N
0.85	21.590	72324	3.00 76.200	0.640 16.256	38.00 6.650	1.600 40.640	62.000 275.776	1.380 35.05	0.105 2.67	13.10	MW CG	N
0.85	21.590	72324S	3.00 76.200	0.640 16.256	32.00 5.600	1.300 33.020	41.000 182.368	1.380 35.05	0.105 2.67	13.10	SST CG	N
0.85	21.590	72258	3.25 82.550	0.680 17.272	15.00 2.625	2.100 53.340	33.000 146.784	1.110 28.19	0.085 2.16	13.00	MW CG	N
0.85	21.590	72258S	3.25 82.550	0.680 17.272	13.00 2.275	1.800 45.720	23.000 102.304	1.110 28.19	0.085 2.16	13.00	SST CG	N
0.85	21.590	72144	3.50 88.900	0.750 19.050	2.50 0.438	3.000 76.200	7.500 33.360	0.460 11.68	0.050 1.27	9.13	MW CG	N
0.85	21.590	72144S	3.50 88.900	0.750 19.050	2.10 0.368	2.400 60.960	5.100 22.685	0.460 11.68	0.050 1.27	9.13	SST CG	N
0.85	21.590	72160	3.50 88.900	0.740 18.796	3.40 0.595	2.900 73.660	9.900 44.035	0.530 13.46	0.055 1.40	9.63	MW CG	N
0.85	21.590	72160S	3.50 88.900	0.740 18.796	2.90 0.508	2.300 58.420	6.700 29.802	0.530 13.46	0.055 1.40	9.63	SST CG	N
0.85	21.590	72170	3.50 88.900	0.716 18.186	6.30 1.103	2.700 68.580	17.000 75.616	0.780 19.81	0.067 1.70	11.60	MW CG	N
0.85	21.590	72170S	3.50 88.900	0.716 18.186	5.30 0.928	2.300 58.420	12.000 53.376	0.780 19.81	0.067 1.70	11.60	SST CG	N
0.85	21.590	72184	3.50 88.900	0.714 18.136	6.50 1.138	2.700 68.580	18.000 80.064	0.810 20.57	0.068 1.73	11.90	MW CG	N
0.85	21.590	72184S	3.50 88.900	0.714 18.136	5.50 0.963	2.300 58.420	13.000 57.824	0.810 20.57	0.068 1.73	11.90	SST CG	N
0.85	21.590	72194	3.50 88.900	0.706 17.932	8.80 1.540	2.400 60.960	21.000 93.408	0.810 20.57	0.072 1.83	11.30	MW CG	N
0.85	21.590	72194S	3.50 88.900	0.706 17.932	7.50 1.313	1.900 48.260	14.000 62.272	0.810 20.57	0.072 1.83	11.30	SST CG	N
0.85	21.590	72208	3.50 88.900	0.702 17.831	8.70 1.523	2.600 66.040	22.000 97.856	0.930 23.62	0.074 1.88	12.60	MW CG	N
0.85	21.590	72208S	3.50 88.900	0.702 17.831	7.40 1.295	2.100 53.340	15.000 66.720	0.930 23.62	0.074 1.88	12.60	SST CG	N
0.85	21.590	72232	3.50 88.900	0.690 17.526	12.00 2.100	2.400 60.960	29.000 128.992	1.030 26.16	0.080 2.03	12.90	MW CG	N
0.85	21.590	72232S	3.50 88.900	0.690 17.526	10.00 1.750	1.900 48.260	19.000 84.512	1.030 26.16	0.080 2.03	12.90	SST CG	N
0.85	21.590	72245	3.50 88.900	0.688 17.475	12.00 2.100	2.400 60.960	29.000 128.992	1.080 27.43	0.081 2.06	13.40	MW CG	N
0.85	21.590	72245S	3.50 88.900	0.688 17.475	10.00 1.750	2.058 52.273	21.000 93.408	1.187 30.15	0.082 2.08	14.50	SST CG	N
0.85	21.590	72259	3.50 88.900	0.680 17.272	15.00 2.625	2.400 60.960	34.000 151.232	1.150 29.21	0.085 2.16	13.50	MW CG	N
0.85	21.590	72259S	3.50 88.900	0.680 17.272	12.00 2.100	1.900 48.260	23.000 102.304	1.150 29.21	0.085 2.16	13.50	SST CG	N
0.85	21.590	72275	3.50 88.900	0.668 16.967	16.00 2.800	1.700 43.180	27.000 120.096	1.270 32.26	0.091 2.31	14.00	SST CG	N
0.85	21.590	72286	3.50 88.900	0.666 16.916	19.00 3.325	2.200 55.880	41.000 182.368	1.330 33.78	0.092 2.34	14.50	MW CG	N
0.85	21.590	72286S	3.50 88.900	0.666 16.916	16.00 2.800	1.700 43.180	28.000 124.544	1.330 33.78	0.092 2.34	14.50	SST CG	N
0.85	21.590	72296	3.50 88.900	0.654 16.612	25.00 4.375	2.000 50.800	50.000 222.400	1.430 36.32	0.098 2.49	14.60	MW CG	N
0.85	21.590	72306	3.50 88.900	0.650 16.510	30.00 5.250	1.800 45.720	53.000 235.744	1.330 33.78	0.100 2.54	13.30	MW CG	N
0.85	21.590	72306S	3.50 88.900	0.650 16.510	26.00 4.550	1.400 35.560	35.000 155.680	1.330 33.78	0.100 2.54	13.30	SST CG	N
0.85	21.590	72326	3.50 88.900	0.640 16.256	32.00 5.600	1.900 48.260	62.000 275.776	1.580 40.13	0.105 2.67	15.00	MW CG	N
0.85	21.590	72326S	3.50 88.900	0.640 16.256	28.00 4.900	1.500 38.100	41.000 182.368	1.580 40.13	0.105 2.67	15.00	SST CG	N
0.85	21.590	72145	4.00 101.600	0.750 19.050	2.20 0.385	3.500 88.900	7.500 33.360	0.510 12.95	0.050 1.27	10.10	MW CG	N
0.85	21.590	72145S	4.00 101.600	0.750 19.050	1.80 0.315	2.800 71.120	5.100 22.685	0.510 12.95	0.050 1.27	10.10	SST CG	N
0.85	21.590	72161	4.00 101.600	0.740 18.796	3.00 0.525	3.300 83.820	9.900 44.035	0.600 15.24	0.055 1.40	10.90	MW CG	N
0.85	21.590	72161S	4.00 101.600	0.740 18.796	2.50 0.438	2.700 68.580	6.700 29.802	0.600 15.24	0.055 1.40	10.90	SST CG	N
0.85	21.590	72171	4.00 101.600	0.716 18.186	5.50 0.963	3.100 78.740	17.000 75.616	0.880 22.35	0.067 1.70	13.10	MW CG	N
0.85	21.590	72171S	4.00 101.600	0.716 18.186	4.60 0.805	2.600 66.040	12.000 53.376	0.880 22.35	0.067 1.70	13.10	SST CG	N
0.85	21.59											




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends E F n sh
0.859	21.819	S-3091	0.88 22.352	0.757 19.228	5.30 0.928	0.570 14.478	3,000 13,344	0.310 7.87	0.051 1.30	5.00	SST CG N
0.859	21.819	12284	0.88 22.352	0.695 17.653	69.00 12.075	0.320 8.128	22,000 97,856	0.330 8.38	0.082 2.08	4.00	SPR CG Z
0.859	21.819	KK-85	0.88 22.352	0.639 16.231	250.00 43.750	0.190 4.826	48,000 213,504	0.440 11.18	0.110 2.79	4.00	SPR CG N
0.859	21.819	12486	0.91 23.114	0.699 17.755	62.00 10.850	0.330 8.382	20,000 88,960	0.400 10.16	0.080 2.03	4.00	SPR CG N
0.859	21.819	2951	0.91 23.114	0.669 16.993	131.00 22.925	0.250 6.350	32,000 142,336	0.380 9.65	0.095 2.41	4.00	SPR CG Z
0.859	21.819	B12-46	1.00 25.400	0.765 19.431	4.00 0.700	0.710 18.034	2,800 12,454	0.290 7.37	0.047 1.19	5.25	SPR CG N
0.859	21.819	PP-92	1.00 25.400	0.725 18.415	25.00 4.375	0.470 11.938	12,000 53,376	0.270 6.86	0.067 1.70	4.00	SST CG N
0.859	21.819	K-50	1.13 28.702	0.735 18.669	21.00 3.675	0.480 12.192	10,000 44,480	0.250 6.35	0.062 1.57	4.00	SPR CG N
0.859	21.819	S-185	1.25 31.750	0.769 19.533	1.20 0.210	0.760 19.304	0.900 4,003	0.500 12.70	0.045 1.14	10.00	SST C N
0.859	21.819	B11-69	1.25 31.750	0.753 19.126	8.70 1.523	0.730 18.542	6,300 28,022	0.240 6.10	0.053 1.35	4.50	SPR CG Z
0.859	21.819	11512	1.25 31.750	0.731 18.567	19.00 3.325	0.580 14.732	11,000 48,928	0.350 8.89	0.064 1.63	4.50	SPR CG Z
0.859	21.819	10148	1.25 31.750	0.723 18.364	23.00 4.025	0.590 14.986	13,000 57,824	0.320 8.13	0.068 1.73	4.75	SPR CG Z
0.859	21.819	12138	1.25 31.750	0.699 17.755	25.00 4.375	0.690 17.526	17,000 75,616	0.560 14.22	0.080 2.03	7.00	SPR CG Z
0.859	21.819	12225	1.28 32.512	0.751 19.075	12.00 2.100	0.570 14.478	6,700 29,802	0.270 6.86	0.054 1.37	4.00	SPR C Z
0.859	21.819	12488	1.28 32.512	0.699 17.755	42.00 7.350	0.490 12.446	20,000 88,960	0.480 12.19	0.080 2.03	5.00	SPR C N
0.859	21.819	2773	1.41 35.814	0.645 16.383	111.00 19.425	0.580 14.732	64,000 284,672	0.640 16.26	0.107 2.72	6.00	MW CG Z
0.859	21.819	S-1307	1.44 36.576	0.725 18.415	14.00 2.450	0.480 21,082	12,000 53,376	0.370 9.40	0.067 1.70	5.50	SST CG N
0.859	21.819	3864	1.44 36.576	0.723 18.364	21.00 3.675	0.640 16.256	13,000 57,824	0.410 10.41	0.068 1.73	5.00	SPR C Z
0.859	21.819	B7-65	1.50 38.100	0.735 18.669	14.00 2.450	0.720 18.288	10,000 44,480	0.310 7.87	0.062 1.57	5.00	SPR CG N
0.859	21.819	11776	1.50 38.100	0.723 18.364	18.00 3.150	0.750 19.050	13,000 57,824	0.440 11.18	0.068 1.73	5.50	SPR C Z
0.859	21.819	10023	1.50 38.100	0.719 18.263	22.00 3.850	0.640 16.256	14,000 62,272	0.370 9.40	0.070 1.78	5.25	SPR CG Z
0.859	21.819	00-53	1.50 38.100	0.639 16.231	137.00 23.975	0.320 8.128	44,000 195,712	0.580 14.73	0.110 2.79	5.25	SST CG N
0.859	21.819	B15-1	1.53 38.862	0.779 19.787	1.10 0.193	1.200 30.480	1,300 5,782	0.340 8.64	0.040 1.02	7.50	SST C N
0.859	21.819	S-73	1.63 41.402	0.751 19.075	3.30 0.578	1.200 30.480	3,800 16,902	0.450 11.43	0.054 1.37	8.25	SST CG N
0.859	21.819	TT-69	1.63 41.402	0.649 16.485	79.00 13.825	0.510 12.954	40,000 177,920	0.680 17.27	0.105 2.67	6.50	SST CG N
0.859	21.819	11435	1.63 41.402	0.609 15.469	127.00 22.225	0.500 12.700	63,000 280,224	1.130 28.70	0.125 3.18	9.00	SPR CG Z
0.859	21.819	10646	1.63 41.402	0.567 14.402	360.00 63.000	0.300 7.620	107,000 475,936	1.020 25.91	0.146 3.71	7.00	SPR CG Z
0.859	21.819	S-1175	1.75 44.450	0.505 12.827	774.00 135.450	0.210 5.334	159,000 707,232	1.240 31.50	0.177 4.50	7.00	SST CG N
0.859	21.819	3321	1.88 47.752	0.575 14.605	248.00 43.400	0.400 10.160	98,000 435,904	1.120 28.45	0.142 3.61	8.00	SPR CG Z
0.859	21.819	B8-33	1.94 49.276	0.651 16.535	78.00 13.650	0.540 13.716	42,000 186,816	0.730 18.54	0.104 2.64	7.00	SPR CG N
0.859	21.819	B17-195	1.97 50.038	0.499 12.675	599.00 104.825	0.260 6.604	155,000 689,440	1.620 41.15	0.180 4.57	9.00	SST CG N
0.859	21.819	2776	2.00 50.800	0.673 17.094	55.00 9.625	0.560 14.224	31,000 137,888	0.690 17.53	0.093 2.36	6.33	SPR C Z
0.859	21.819	10502	2.00 50.800	0.663 16.840	43.00 7.525	0.830 21,082	36,000 160,128	0.880 22.35	0.098 2.49	9.00	SPR CG Z
0.859	21.819	12465	2.00 50.800	0.619 15.723	123.00 21.525	0.510 12.954	62,000 275,776	0.960 24.38	0.120 3.05	8.00	SPR CG Z
0.859	21.819	S-459	2.06 52.324	0.675 17.145	25.00 4.375	1.100 27.940	27,000 120,096	0.920 23.37	0.092 2.34	10.00	SST CG N
0.859	21.819	KK-81	2.25 57.150	0.539 13.691	460.00 80.500	0.290 7.366	135,000 600,480	1.280 32.51	0.160 4.06	8.00	SPR CG Z
0.859	21.819	10370	2.38 60.452	0.709 18.009	11.00 1.925	1.500 38.100	16,000 71,168	0.880 22.35	0.075 1.91	10.80	SPR C Z
0.859	21.819	S-465	2.44 61.976	0.649 16.485	48.00 8.400	0.840 21.336	40,000 177,920	0.980 24.89	0.105 2.67	9.33	SST CG N
0.859	21.819	10829	2.50 63.500	0.699 17.755	17.00 2.975	1.200 30.480	20,000 88,960	0.750 19.05	0.080 2.03	9.33	SPR CG Z
0.859	21.819	11430	2.50 63.500	0.659 16.739	36.00 6.300	0.960 24.384	35,000 155,680	1.000 25.40	0.100 2.54	10.00	SST CG N
0.859	21.819	11174	2.53 64.262	0.641 16.281	53.00 9.275	0.840 21.336	45,000 200,160	1.090 27.69	0.109 2.77	10.00	SST CG N
0.859	21.819	S-381	2.63 66.802	0.765 19.431	1.80 0.315	2.200 55,880	3,900 17,347	0.400 10.16	0.047 1.19	8.50	SST CG N
0.859	21.819	11510	2.63 66.802	0.563 14.300	202.00 35.350	0.550 13.970	111,000 493,728	1.850 46.99	0.148 3.76	11.50	SPR CG Z
0.859	21.819	11953	2.69 68.326	0.687 17.450	24.00 4.200	1.000 25.400	25,000 111,200	0.770 19.56	0.086 2.18	9.00	SPR CG Z
0.859	21.819	2908	2.75 69.850	0.669 16.993	26.00 4.550	1.200 30.480	32,000 142,336	1.140 28.96	0.095 2.41	12.00	SPR CG Z
0.859	21.819	4305	2.75 69.850	0.609 15.469	83.00 14.525	0.850 21.590	70,000 311,360	1.590 40.39	0.125 3.18	12.80	SPR CG Z
0.859	21.819	11591	2.78 70.612	0.643 16.332	58.00 10.150	0.820 20.828	47,000 209,056	1.190 30.23	0.108 2.74	10.00	SPR CG GI
0.859	21.819	10935	2.84 72.136	0.777 19.736	0.93 0.163	2.400 60,960	2,200 9,786	0.450 11.43	0.041 1.04	10.00	SPR C N
0.859	21.819	A13-43	3.00 76.200	0.767 19.482	1.60 0.280	2.600 66,040	4,200 18,682	0.390 9.91	0.046 1.17	8.50	SST CG N
0.859	21.819	3770	3.00 76.200	0.505 12.827	424.00 74.200	0.420 10.668	180,000 800,640	2.210 56.13	0.177 4.50	12.50	SPR CG Z
0.859	21.819	2741	3.25 82.550	0.707 17.958	10.00 1.750	1.800 45.720	18,000 80,064	0.910 23.11	0.076 1.93	12.00	SPR CG Z
0.859	21.819	2593	3.41 86.614	0.743 18.872	3.00 0.525	2.700 68,580	8,100 36,029	0.730 18.54	0.058 1.47	12.50	SPR CG GI
0.859	21.819	11947	3.56 90.424	0.735 18.669	8.40 1.470	1.200 30,480	10,000 44,480	0.430 10.92	0.062 1.57	7.00	SPR CG N
0.859	21.819	11829	3.63 92.202	0.737 18.720	3.50 0.613	2.600 66,040	9,100 40,477	0.730 18.54	0.061 1.55	12.00	SST CG N
0.859	21.819	1561	3.75 95.250	0.629 15.977	51.00 8.925	1.100 27.940	55,000 244,640	1.610 40.89	0.115 2.92	14.00	SPR CG Z
0.859	21.819	B17-186	4.19 106.426	0.771 19.583	1.00 0.175	3.500 88,900	3,700 16,458	0.460 11.68	0.044 1.12	10.50	SST CG N
0.859	21.819	S-3067	4.63 117.602	0.735 18.669	3.60 0.630	2.622 66,599	9,400 41,811	0.814 20.68	0.063 1.59	12.10	SST C N
0.859	21.819	3227	4.69 119.126	0.609 15.469	45.00 7.875	1.760 40,640	70,000 311,360	2.720 69.09	0.125 3.18	21.80	SPR CG Z
0.859	21.819	10464	5.25 133.350	0.649 16.485	23.00 4.025	1.900 48,260	44,000 195,712	2.100 53.34	0.105 2.67	20.00	SPR CG Z
0.859	21.819	12021	5.50 139.700	0.785 19.939	0.24 0.042	4.700 119,380	1,100 4,893	0.810 20.57	0.037 0.94	22.00	SPR CG Z
0.859	21.819	3101	6.75 171.450	0.579 14.707	55.00 9.625	1.700 43,180	94,000 418,112	4.040 102.62	0.140 3.56	29.00	SPR CG Z
0.859	21.819	12153	8.56 217.424	0.609 15.469	32.00 5.600	2.200 25,588	70,000 311,360	3.750 95.25	0.125 3.18	30.00	SPR CG Z
0.859	21.819	3075	9.00 228.600	0.667 16.942	8.40 1.470	4,000 101,600	33,000 146,784	3.320 84.33	0.096 2.44	34.80	SPR CG Z
0.875	22.225	2726	0.41 10.414	0.76							




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
0.875	22.225	S-886	0.94 23.876	0.793 20.142	4.10 0.718	0.720 18.288	2,900 12,899	0.180 4.57	0.041 1.04	3.50	SST	C N
0.875	22.225	10315	0.94 23.876	0.751 19.075	26.00 4.550	0.380 9.652	9,900 44,035	0.280 7.11	0.062 1.57	3.50	SPR	C Z
0.875	22.225	4184	1.00 25.400	0.675 17.145	77.00 13.475	0.400 10.160	31,000 137,888	0.600 15.24	0.100 2.54	6.00	SPR	CG Z
0.875	22.225	12133	1.03 26.162	0.757 19.228	16.00 2.800	0.530 13.462	8,600 38.253	0.240 6.10	0.059 1.50	4.00	SPR	CG Z
0.875	22.225	3686	1.06 26.924	0.715 18.161	59.00 10.325	0.340 8.636	20,000 88,960	0.320 8.13	0.080 2.03	4.00	SPR	CG Z
0.875	22.225	S-1437	1.09 27.686	0.665 16.891	111.00 19.425	0.360 9.144	40,000 177,920	0.530 13.46	0.105 2.67	5.00	SST	CG N
0.875	22.225	GG-53	1.13 28.702	0.655 16.637	157.00 27.475	0.300 7.620	47,000 209,056	0.550 13.97	0.110 2.79	5.00	SPR	CG Z
0.875	22.225	11118	1.16 29.464	0.799 20.295	1.40 0.245	0.900 22.860	1,200 5,338	0.260 6.60	0.038 0.97	5.75	MW	C N
0.875	22.225	H-37	1.25 31.750	0.785 19.939	1.20 0.210	0.740 18.796	0.920 4,092	0.510 12.95	0.045 1.14	10.30	MW	C N
0.875	22.225	S-127	1.28 32.512	0.775 19.685	2.50 0.438	0.900 22.860	2,280 10,141	0.380 9.65	0.050 1.27	7.50	SST	CG N
0.875	22.225	10307	1.31 33.274	0.715 18.161	23.00 4.025	0.750 19.050	18,000 80,064	0.560 14.22	0.080 2.03	7.00	SPR	CG Z
0.875	22.225	S-1446	1.38 35.052	0.751 19.075	8.60 1.505	0.997 25.324	8,600 38,253	0.383 9.73	0.063 1.59	6.10	SST	CG N
0.875	22.225	11263	1.38 35.052	0.693 17.602	32.00 5.600	0.670 17.018	21,000 93,408	0.710 18.03	0.091 2.31	7.75	SST	CG N
0.875	22.225	914	1.38 35.052	0.665 16.891	96.00 16.800	0.450 11.430	43,000 191,264	0.740 18.80	0.105 2.67	6.00	HD	C Z
0.875	22.225	3167	1.44 36.576	0.615 15.621	221.00 38.675	0.340 8.636	75,000 333,600	0.850 21.59	0.130 3.30	6.50	SPR	CG Z
0.875	22.225	S-1359	1.50 38.100	0.813 20.650	0.96 0.168	1.300 33,020	1,300 5,782	0.160 4.06	0.031 0.79	4.00	SST	C N
0.875	22.225	11550	1.50 38.100	0.789 20.041	2.80 0.490	1,200 30,480	3,500 15,568	0.260 6.60	0.043 1.09	5.00	SPR	C Z
0.875	22.225	10497	1.50 38.100	0.731 18.567	12.00 2.100	0.910 23,114	11,000 48,928	0.590 14.99	0.072 1.83	8.25	SPR	CG Z
0.875	22.225	10398	1.50 38.100	0.715 18.161	18.00 3.150	0.820 20,828	15,000 66,720	0.680 17.27	0.080 2.03	8.50	SPR	CG Z
0.875	22.225	S-1574	1.59 40.386	0.775 19.685	3.50 0.613	1,200 30,480	4,400 19,571	0.350 8.89	0.050 1.27	6.00	SST	C N
0.875	22.225	S-208	1.63 41.402	0.751 19.075	6.90 1.208	1.178 29,921	8,100 36,029	0.447 11.35	0.063 1.59	7.20	SST	CG N
0.875	22.225	S-42	1.63 41.402	0.727 18.466	15.00 2.625	1,000 25,400	15,000 66,720	0.520 13.21	0.074 1.88	7.00	SST	CG N
0.875	22.225	11584	1.75 44.450	0.733 18.618	9.40 1.645	1,000 25,400	9,400 41,811	0.750 19.05	0.071 1.80	9.50	SPR	CG Z
0.875	22.225	11999	1.78 45.212	0.665 16.891	70.00 12.250	0.620 15,748	43,000 191,264	0.790 20.07	0.105 2.67	7.50	SPR	CG Z
0.875	22.225	S-1390	1.88 47.752	0.715 18.161	17.00 2.975	1,100 27,940	19,000 84,512	0.720 18.29	0.080 2.03	8.00	SST	C N
0.875	22.225	3525	1.88 47.752	0.491 12.471	943.00 165,025	0.220 5,588	212,000 942,976	1,630 41,40	0.192 4.88	8.50	HD	CG Z
0.875	22.225	B7-52	1.91 48.514	0.643 16.332	64.00 11.200	0.720 18,288	46,000 204,608	1,190 30.23	0.116 2.95	10.30	SST	CG N
0.875	22.225	2588	1.94 49.276	0.693 17.602	41.00 7.175	0.690 17,526	28,000 124,544	0.640 16.26	0.091 2.31	7.00	HD	CG Z
0.875	22.225	12264	2.00 50.800	0.749 19.025	11.00 1.925	0.980 24,892	10,000 44,480	0.440 11.18	0.063 1.60	6.00	SPR	C Z
0.875	22.225	1916	2.00 50.800	0.731 18.567	16.00 2.800	0.920 23,368	15,000 66,720	0.550 13.97	0.072 1.83	6.67	SPR	C Z
0.875	22.225	II-65	2.00 50.800	0.695 17.653	32.00 5.600	0.840 21,336	27,000 120,096	0.810 20.57	0.090 2.29	8.00	SPR	C Z
0.875	22.225	3308	2.00 50.800	0.691 17.551	61.00 10.675	0.470 11.938	29,000 128,992	0.600 15.24	0.092 2.34	5.50	SPR	C Z
0.875	22.225	3926	2.00 50.800	0.665 16.891	77.00 13.475	0.560 14,224	43,000 191,264	0.840 21.34	0.105 2.67	7.00	SPR	C Z
0.875	22.225	68	2.00 50.800	0.635 16.129	99.00 17.325	0.620 15,748	61,000 271,328	1,080 27.43	0.120 3.05	9.00	HD	CG Z
0.875	22.225	808	2.00 50.800	0.521 13.233	572.00 100,100	0.310 7,874	177,000 787,296	1,640 41.66	0.177 4.50	9.25	HD	CG Z
0.875	22.225	2825	2.03 51.562	0.635 16.129	76.00 13.300	0.690 17,526	53,000 235,744	1,340 34.04	0.120 3.05	11.13	MW	CG GI
0.875	22.225	10552	2.06 52.324	0.765 19.431	4.30 0.753	1,600 40,640	6,900 30,691	0.470 11.94	0.055 1.40	7.50	SPR	C Z
0.875	22.225	12449	2.06 52.324	0.633 16.078	120.00 21,000	0.520 13,208	63,000 280,224	0.970 24.64	0.121 3.07	8.00	SPR	CG N
0.875	22.225	11205	2.13 54.102	0.745 18.923	5.40 0.945	1,400 35,560	7,500 33,360	0.720 18.29	0.065 1.65	10.00	SST	C N
0.875	22.225	3025	2.13 54.102	0.625 15.875	139.00 24,325	0.500 12,700	69,000 306,912	1,130 30.73	0.105 2.67	3.18	SPR	C Z
0.875	22.225	A14-66	2.16 54.864	0.741 18.821	12.00 2.100	0.970 24,638	12,000 53,376	0.400 10.16	0.067 1.70	6.00	SST	CG N
0.875	22.225	2971	2.19 55.626	0.691 17.551	48.00 8,400	0.610 15,494	29,000 128,992	0.690 17.53	0.092 2.34	6.50	SPR	C Z
0.875	22.225	12005	2.19 55.626	0.689 17.501	45.00 7,875	0.670 17,018	30,000 133,440	0.650 16.51	0.093 2.36	7.00	SPR	CG Z
0.875	22.225	S-299	2.22 56.388	0.795 20.193	0.92 0.161	1,900 48,260	1,700 7,562	0.360 9.14	0.040 1.02	8.00	SST	C N
0.875	22.225	11104	2.25 57.150	0.761 19.329	5.00 0.875	1,500 38,100	7,700 34,250	0.480 12.19	0.057 1.45	7.50	SPR	C N
0.875	22.225	3895	2.25 57.150	0.725 18.415	11.00 1.925	1,500 38,100	17,000 75,616	0.750 19.05	0.075 1.91	10.00	SPR	CG Z
0.875	22.225	10119	2.25 57.150	0.649 16.485	59.00 10,325	0.870 22,098	51,000 226,848	1,240 31.50	0.113 2.87	11.00	SPR	CG Z
0.875	22.225	2927	2.38 60.452	0.767 19.482	2.20 0.385	1,700 43,180	3,900 17,347	0.640 16.26	0.054 1.37	12.00	SPR	CG GI
0.875	22.225	3952	2.38 60.452	0.731 18.567	11.00 1.925	1,400 35,560	15,000 66,720	0.720 18.29	0.072 1.83	9.00	SPR	C Z
0.875	22.225	S-1314	2.44 61.976	0.665 16.891	35.00 6.125	1,100 27,940	40,000 177,920	1,210 30.73	0.105 2.67	11.50	SST	CG N
0.875	22.225	11272	2.50 63.500	0.665 16.891	59.00 10,325	0.730 18,542	43,000 191,264	0.890 22.61	0.105 2.67	8.50	SPR	CG Z
0.875	22.225	664	2.50 63.500	0.635 16.129	69.00 12,075	0.880 22,352	61,000 271,328	1,440 36.58	0.120 3.05	12.00	HD	CG Z
0.875	22.225	49	2.50 63.500	0.605 15.367	118.00 20,650	0.710 18,034	84,000 373,632	1,620 41.15	0.135 3.43	12.00	HD	CG Z
0.875	22.225	4142	2.75 69.850	0.663 16.840	47.00 8,225	0.940 23,876	44,000 195,712	1,110 28.19	0.106 2.69	10.50	SPR	CG Z
0.875	22.225	52	2.75 69.850	0.579 14.707	163.00 28,525	0.670 17,018	109,000 484,832	1,920 48.77	0.148 3.76	13.00	HD	CG Z
0.875	22.225	2762	2.81 71.374	0.761 19.329	3.70 0.648	2,100 53,340	7,700 34,250	0.600 15.24	0.057 1.45	9.50	SPR	C GI
0.875	22.225	3096	2.88 73.152	0.693 17.602	20.00 3,500	1,400 35,560	28,000 124,544	1,090 27.69	0.091 2.31	12.00	SPR	CG Z
0.875	22.225	2906	2.94 74.676	0.715 18.161	12.00 2,100	1,700 43,180	20,000 88,960	0.950 24.13	0.080 2.03	12.00	SPR	CG Z
0.875	22.225	55	3.00 76.200	0.693 17.602	19.00 3,325	1,400 35,560	28,000 124,544	1,140 28.96	0.091 2.31	12.50	HD	CG Z
0.875	22.225	56	3.00 76.200	0.665 16.891	34.00 5,950	1,300 33,020	43,000 191,264	1,390 35.31	0.105 2.67	13.30	HD	CG Z
0.875	22.225	12464	3.06 77.724	0.691 17.551	21.00 3,675	1,400 35,560	29,000 128,992	1,130 28.70	0.092 2.34	12.30	SPR	CG N
0.875	22.225	DD-78	3.25 82.550	0.695 17.653	14.00 2,450	1,900 48,260	27,000 120,096	1,400 35.56	0.090 2.29	15.50	SPR	CG Z
0.875	22.225	12166</td										




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fnsh								
0.875	22.225	11973	5.63	143.002	0.675	17.145	16.00	2.800	3.200	81.280	52.000	231.296	2.100	53.34	0.100	2.54	21.00	MW	CG	Z
0.875	22.225	883	6.00	152.400	0.693	17.602	9.30	1.628	3.000	76.200	28.000	124.544	2.180	55.37	0.091	2.31	24.00	HD	CG	Z
0.875	22.225	872	6.00	152.400	0.665	16.891	16.00	2.800	2.700	68.580	43.000	191.264	2.810	71.37	0.105	2.67	25.80	HD	CG	Z
0.875	22.225	865	6.00	152.400	0.635	16.129	29.00	5.075	2.100	53.340	61.000	271.328	3.120	79.25	0.120	3.05	26.00	HD	CG	Z
0.875	22.225	855	6.00	152.400	0.605	15.367	46.00	8.050	1.800	45.720	84.000	373.632	3.750	95.25	0.135	3.43	27.80	HD	CG	Z
0.875	22.225	818	6.00	152.400	0.579	14.707	70.00	12.250	1.600	40.640	109.000	484.832	4.110	104.39	0.148	3.76	27.80	HD	CG	Z
0.875	22.225	1939	6.50	165.100	0.689	17.501	7.60	1.330	3.500	88.900	27.000	120.096	3.020	76.71	0.093	2.36	31.50	SPR	C	Z
0.875	22.225	395	7.13	181.102	0.647	16.434	20.00	3.500	2.700	68.580	53.000	235.744	3.410	86.61	0.114	2.90	30.00	SPR	CG	Z
0.875	22.225	892	7.75	196.850	0.715	18.161	4.50	0.788	4.400	111.760	20.000	88.960	2.320	58.93	0.080	2.03	28.00	HD	C	Z
0.875	22.225	11686	7.75	196.850	0.661	16.789	13.00	2.275	3.600	91.440	45.000	200.160	3.880	98.55	0.107	2.72	35.30	SPR	C	Z
0.875	22.225	11982	8.22	208.788	0.671	17.043	10.00	1.750	3.900	99.060	39.000	173.472	3.570	90.68	0.102	2.59	35.00	SPR	CG	Z
0.875	22.225	11525	8.28	210.312	0.685	17.399	12.00	2.100	2.700	68.580	32.000	142.336	2.280	57.91	0.095	2.41	23.00	SPR	CG	Z
0.875	22.225	377	8.50	215.900	0.731	18.567	3.70	0.648	3.900	99.060	15.000	66.720	1.660	42.16	0.072	1.83	22.00	HD	C	Z
0.875	22.225	10004	8.88	225.552	0.635	16.129	18.00	3.150	3.400	86.360	61.000	271.328	4.800	121.92	0.120	3.05	40.00	SPR	CG	Z
0.875	22.225	289	12.00	304.800	0.751	19.075	1.20	0.021	8.000	203.200	9.900	44.035	2.170	55.12	0.062	1.57	34.00	HD	C	Z
0.875	22.225	899	12.00	304.800	0.731	18.567	2.10	0.368	7.100	180.340	15.000	66.720	2.830	71.88	0.072	1.83	38.30	HD	C	Z
0.875	22.225	893	12.00	304.800	0.715	18.161	2.90	0.508	7.000	177.800	20.000	88.960	3.490	88.65	0.080	2.03	42.70	HD	C	Z
0.875	22.225	10677	12.30	312.420	0.645	16.383	11.00	1.925	5.000	127.000	54.000	240.192	6.330	160.78	0.115	2.92	55.00	SPR	CG	Z
0.875	22.225	4015	18.50	469.900	0.715	18.161	1.90	0.333	11.000	279.400	20.000	88.960	5.240	133.10	0.080	2.03	64.50	HD	C	Z
0.875	22.225	4037	26.50	673.100	0.605	15.367	10.00	1.750	8.200	208.280	84.000	373.632	15.800	401.32	0.135	3.43	117.00	SPR	CG	Z
0.89	22.606	2827	0.63	16.002	0.730	18.542	37.00	6.475	0.230	5.842	8.300	36.918	0.400	10.16	0.080	2.03	5.00	HD	CG	Z
0.89	22.606	AA-64	0.63	16.002	0.630	16.002	468.00	81.900	0.110	2.794	49.000	217.952	0.520	13.21	0.130	3.30	4.00	SPR	CG	Z
0.89	22.606	10584	0.91	23.114	0.650	16.510	261.00	45.675	0.230	5.842	60.000	266.880	0.540	13.72	0.120	3.05	4.50	SPR	CG	Z
0.89	22.606	10031	1.00	25.400	0.796	20.218	2.90	0.508	0.670	17.018	2.000	8.896	0.330	8.38	0.047	1.19	6.00	SPR	C	Z
0.89	22.606	1910	1.00	25.400	0.780	19.812	11.00	1.925	0.610	15.494	6.800	30.246	0.220	5.59	0.055	1.40	4.00	SPR	CG	N
0.89	22.606	11919	1.09	27.686	0.682	17.323	102.00	17.850	0.377	9.576	38.000	169.024	0.533	13.54	0.105	2.67	5.10	SST	CG	N
0.89	22.606	PP-64	1.38	35.052	0.770	19.558	8.10	1.418	1.000	25.400	8.300	36.918	0.360	9.14	0.060	1.52	6.00	SPR	CG	N
0.89	22.606	11232	1.38	35.052	0.748	18.999	11.00	1.925	0.810	20.574	8.900	39.587	0.570	14.48	0.071	1.80	8.00	SPR	CG	N
0.89	22.606	3383	1.38	35.052	0.736	18.694	34.00	5.950	0.520	13.208	18.000	80.064	0.440	11.18	0.077	1.96	4.75	SPR	C	Z
0.89	22.606	11412	1.38	35.052	0.680	17.272	90.00	15.750	0.470	11.938	42.000	186.816	0.630	16.00	0.105	2.67	6.00	SPR	CG	Z
0.89	22.606	S-324	1.38	35.052	0.566	14.376	595.00	104.125	0.200	5.080	121.000	538.208	0.930	23.62	0.162	4.11	5.75	SST	CG	N
0.89	22.606	11863	1.41	35.814	0.768	19.507	5.00	0.875	0.800	20.320	4.000	17.792	0.610	15.49	0.061	1.55	9.00	SPR	C	N
0.89	22.606	10293	1.44	36.576	0.746	18.948	14.00	2.450	0.930	23.622	13.000	57.824	0.500	12.70	0.072	1.83	7.00	SPR	CG	Z
0.89	22.606	10165	1.44	36.576	0.578	14.681	431.00	75.425	0.280	7.112	122.000	542.656	1.090	27.69	0.156	3.96	7.00	SPR	CG	Z
0.89	22.606	A14-54	1.50	38.100	0.806	20.472	1.80	0.315	1.200	30.480	2.300	10.230	0.250	6.35	0.042	1.07	6.00	SPR	CG	N
0.89	22.606	11318	1.50	38.100	0.748	18.999	13.00	2.275	0.990	25.146	12.000	53.376	0.510	12.95	0.071	1.80	7.25	SPR	CG	Z
0.89	22.606	10338	1.50	38.100	0.730	18.542	18.00	3.150	0.840	21.336	15.000	66.720	0.660	16.76	0.080	2.03	8.25	SPR	CG	Z
0.89	22.606	11171	1.50	38.100	0.730	18.542	20.00	3.500	0.900	22.860	18.000	80.064	0.600	15.24	0.080	2.03	7.50	SPR	CG	Z
0.89	22.606	WW-66	1.63	41.402	0.786	19.964	2.20	0.385	1.100	27.940	2.500	11.120	0.520	13.21	0.052	1.32	9.00	SST	C	N
0.89	22.606	10656	1.63	41.402	0.750	19.050	10.00	1.750	1.000	25.400	10.000	44.480	0.580	14.73	0.070	1.78	8.25	SPR	CG	Z
0.89	22.606	12175	1.78	45.212	0.620	15.748	185.00	32.375	0.450	11.430	82.000	364.736	1.080	27.43	0.135	3.43	8.00	SPR	CG	N
0.89	22.606	00-88	1.88	47.752	0.658	16.713	57.00	9.975	0.660	16.764	38.000	169.024	1.220	30.99	0.116	2.95	10.50	SST	CG	N
0.89	22.606	3254	1.88	47.752	0.576	14.630	341.00	59.675	0.360	9.144	124.000	551.552	1.330	33.78	0.157	3.99	8.50	SPR	CG	Z
0.89	22.606	S-1218	2.00	50.800	0.720	18.288	17.00	2.975	1.200	30.480	20.000	88.960	0.810	20.57	0.085	2.16	9.50	SST	CG	N
0.89	22.606	11851	2.03	51.562	0.722	18.339	17.00	2.975	1.235	31.369	21.000	93.408	0.795	20.19	0.085	2.16	9.40	SST	CG	N
0.89	22.606	11523	2.22	56.388	0.732	18.593	12.00	2.100	1.300	33.020	15.000	66.720	0.950	24.13	0.079	2.01	11.00	SPR	C	Z
0.89	22.606	S-284	2.25	57.150	0.810	20.574	0.87	0.152	1.900	48.260	1.600	7.117	0.360	9.14	0.040	1.02	8.00	SST	C	N
0.89	22.606	3362	2.25	57.150	0.766	19.456	6.20	1.085	1.600	40.640	9.800	43.590	0.560	14.22	0.062	1.57	8.00	HD	C	Z
0.89	22.606	MM-32	2.25	57.150	0.766	19.456	4.80	0.840	1.687	42.850	8.000	35.584	0.563	14.30	0.063	1.59	9.00	SST	CG	N
0.89	22.606	12173	2.25	57.150	0.678	17.221	63.00	11.025	0.690	17.526	43.000	191.264	0.850	21.59	0.106	2.69	8.00	SPR	CG	Z
0.89	22.606	S-3015	2.31	58.674	0.720	18.288	17.00	2.975	1.300	33.020	22.000	97.856	0.810	20.57	0.085	2.16	9.50	SST	CG	N
0.89	22.606	10822	2.38	60.452	0.640	16.256	90.00	15.750	0.760	19.304	68.000	302.464	1.340	34.04	0.125	3.18	10.80	SPR	CG	Z
0.89	22.606																			




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish							
0.906	23.012	2881	1.31	33.274	0.782	19.863	12.00	2.100	0.810	20.574	9.600	42.701	0.310	7.87	0.062	1.57	5.00	SPR CG	Z
0.906	23.012	10567	1.38	35.052	0.746	18.948	17.00	2.975	0.720	18.288	12.000	53.376	0.660	16.76	0.080	2.03	8.25	SPR CG	Z
0.906	23.012	10397	1.47	37.338	0.750	19.050	16.00	2.800	0.840	21.336	13.000	57.824	0.620	15.75	0.078	1.98	8.00	SPR CG	Z
0.906	23.012	S-1546	1.50	38.100	0.864	21.946	0.03	0.005	1.200	30.480	0.040	0.178	0.280	7.11	0.021	0.53	12.30	SST C	N
0.906	23.012	11319	1.50	38.100	0.750	19.050	19.00	3.325	0.880	22.352	16.000	71.168	0.620	15.75	0.078	1.98	7.00	SPR C	Z
0.906	23.012	10377	1.50	38.100	0.746	18.948	16.00	2.800	0.820	20.828	13.000	57.824	0.680	17.27	0.080	2.03	8.50	SPR CG	Z
0.906	23.012	10345	1.50	38.100	0.736	18.694	23.00	4.025	0.740	18.796	17.000	75.616	0.770	19.56	0.085	2.16	8.00	SPR C	Z
0.906	23.012	S-1196	1.50	38.100	0.696	17.678	49.00	8.575	0.660	16.764	33.000	146.784	0.840	21.34	0.105	2.67	8.00	SST CG	N
0.906	23.012	10674	1.56	39.624	0.766	19.456	9.80	1.715	0.930	23.622	9.200	40.922	0.630	16.00	0.070	1.78	8.00	SPR C	Z
0.906	23.012	10842	1.56	39.624	0.746	18.948	20.00	3.500	0.900	22.860	18.000	80.064	0.660	16.76	0.080	2.03	7.25	SPR C	N
0.906	23.012	3149	1.56	39.624	0.666	16.916	112.00	19.600	0.530	13.462	59.000	262.432	0.900	22.86	0.120	3.05	7.50	SPR CG	Z
0.906	23.012	3754	1.75	44.450	0.696	17.678	68.00	11.900	0.610	15.494	41.000	182.368	0.740	18.80	0.105	2.67	7.00	HD CG	Z
0.906	23.012	11941	1.75	44.450	0.636	16.154	174.00	30.450	0.470	11.938	81.000	360.288	1.080	27.43	0.135	3.43	8.00	SPR CG	Z
0.906	23.012	1603	2.13	54.102	0.810	20.574	1.10	0.193	1.500	38.100	1.600	7.117	0.620	15.75	0.048	1.22	13.00	MW CG	Z
0.906	23.012	10739	2.25	57.150	0.790	20.066	4.90	0.858	1.600	40.640	7.900	35.139	0.490	12.45	0.058	1.47	7.50	SPR C	N
0.906	23.012	11924	2.34	59.436	0.746	18.948	16.00	2.800	1.200	30.480	19.000	84.512	0.680	17.27	0.080	2.03	8.50	SPR CG	Z
0.906	23.012	11853	2.38	60.452	0.840	21.336	0.65	0.114	2.200	55.880	1.400	6.227	0.210	5.33	0.033	0.84	5.50	SST C	N
0.906	23.012	10378	2.38	60.452	0.782	19.863	2.90	0.508	1.500	38.100	4.400	19.571	0.870	22.10	0.062	1.57	14.00	SPR CG	Z
0.906	23.012	53	2.75	69.850	0.696	17.678	35.00	6.125	1.200	30.480	41.000	182.368	1.330	33.78	0.105	2.67	11.70	HD C	Z
0.906	23.012	1665	3.13	79.502	0.756	19.202	8.80	1.540	2.200	55.880	20.000	88.960	0.900	22.86	0.075	1.91	11.00	MW C	Z
0.906	23.012	1537	3.16	80.264	0.762	19.355	7.20	1.260	2.000	50.800	14.000	62.272	0.880	22.35	0.072	1.83	11.30	SPR C	Z
0.906	23.012	2679	3.19	81.026	0.724	18.390	14.00	2.450	1.700	43.180	23.000	102.304	1.480	37.59	0.091	2.31	15.30	MW C	Z
0.906	23.012	3463	3.38	85.852	0.722	18.339	20.00	3.500	1.400	35.560	28.000	124.544	1.150	29.21	0.092	2.34	11.50	HD C	Z
0.906	23.012	B9-55	3.50	88.900	0.826	20.980	0.52	0.091	3.000	76.200	1.500	6.672	0.520	13.21	0.040	1.02	13.00	SPR CG	N
0.906	23.012	3233	3.56	90.424	0.714	18.136	19.00	3.325	1.700	43.180	32.000	142.336	1.460	37.08	0.096	2.44	14.30	SPR C	Z
0.906	23.012	12109	3.59	91.186	0.760	19.304	8.80	1.540	1.700	43.180	15.000	66.720	0.730	18.54	0.073	1.85	10.00	SPR CG	Z
0.906	23.012	S-3042	3.63	92.202	0.610	15.494	115.00	20.125	0.830	21.082	95.000	422.560	2.070	52.58	0.148	3.76	14.00	SST CG	N
0.906	23.012	3342	4.00	101.600	0.756	19.202	3.70	0.648	2.200	55.880	8.200	36.474	1.760	44.70	0.075	1.91	23.50	SPR CG	Z
0.906	23.012	3435	4.25	107.950	0.806	20.472	1.40	0.245	3.500	88.900	5.100	22.685	0.650	16.51	0.050	1.27	12.00	SPR C	Z
0.906	23.012	1689	5.00	127.000	0.746	18.948	7.10	1.243	2.700	68.580	19.000	84.512	1.340	34.04	0.080	2.03	16.80	SPR CG	Z
0.906	23.012	12677	5.38	136.652	0.656	16.662	35.00	6.125	1.900	48.260	67.000	298.016	3.000	76.20	0.125	3.18	23.00	SPR C	N
0.906	23.012	12158	8.75	222.250	0.756	19.202	2.50	0.438	6.200	157.480	15.000	66.720	2.550	64.77	0.075	1.91	34.00	SPR CG	Z
0.906	23.012	3912	9.00	228.600	0.696	17.678	13.00	2.275	3.200	81.280	41.000	182.368	2.940	74.68	0.105	2.67	28.00	SPR CG	Z
0.906	23.012	3147	14.00	355.600	0.724	18.390	4.00	0.700	6.800	172.720	27.000	120.096	4.390	111.51	0.091	2.31	47.30	SPR C	Z
0.906	23.012	3150	14.80	375.920	0.696	17.678	5.70	0.998	7.300	185.420	41.000	182.368	6.480	164.59	0.105	2.67	61.80	SPR CG	Z
0.921	23.393	2817	0.50	12.700	0.701	17.805	395.00	69.125	0.160	4.064	63.000	280.224	0.330	8.38	0.110	2.79	3.00	MW CG	Z
0.921	23.393	10714	0.63	16.002	0.811	20.599	20.00	3.500	0.330	8.382	6.600	29.357	0.220	5.59	0.055	1.40	3.00	SPR C	N
0.921	23.393	11195	0.66	16.764	0.813	20.650	17.00	2.975	0.350	8.890	5.900	26.243	0.220	5.59	0.054	1.37	3.00	SST CG	N
0.921	23.393	12711	0.88	22.352	0.775	19.685	33.00	5.775	0.580	14.732	20.000	88.960	0.290	7.37	0.073	1.85	4.00	MW CG	Z
0.921	23.393	2690	0.88	22.352	0.681	17.297	258.00	45.150	0.320	8.128	82.000	364.736	0.510	12.95	0.120	3.05	4.25	MW CG	Z
0.921	23.393	3333	0.94	23.876	0.801	20.345	7.30	1.278	0.580	14.732	4.200	18.682	0.360	9.14	0.060	1.52	6.00	SPR CG	Z
0.921	23.393	10785	1.00	25.400	0.775	19.685	30.00	5.250	0.480	12.192	14.400	64.051	0.374	9.50	0.072	1.83	4.00	SST C	N
0.921	23.393	10766	1.13	28.702	0.811	20.599	6.80	1.190	0.800	20.320	5.400	24.019	0.330	8.38	0.055	1.40	5.00	SPR C	Z
0.921	23.393	3828	1.13	28.702	0.761	19.329	33.00	5.775	0.580	14.732	19.000	84.512	0.400	10.16	0.080	2.03	5.00	HD CG	Z
0.921	23.393	S-3029	1.13	28.702	0.721	18.313	90.00	15.750	0.360	9.144	33.000	146.784	0.450	11.43	0.100	2.54	4.50	SST CG	N
0.921	23.393	B18-158	1.25	31.750	0.817	20.752	2.80	0.490	0.890	22.606	2.500	11.120	0.360	9.14	0.052	1.32	7.00	SST CG	N
0.921	23.393	10197	1.25	31.750	0.749	19.025	27.00	4.725	0.650	16.510	18.000	80.064	0.600	15.24	0.086	2.18	7.00	SPR CG	Z
0.921	23.393	10456	1.38	35.052	0.749	19.025	23.00	4.025	0.710	18.034	17.000	75.616	0.670	17.02	0.086	2.18	7.75	SPR CG	Z
0.921	23.393	10706	1.38	35.052	0.739	18.771	31.00	5.425	0.690	17.526	22.000	97.856	0.680	17.27	0.091	2.31	7.50	SPR CG	Z
0.921	23.393	11233	1.38	35.052	0.739	18.771	38.00	6.650	0.700	17.780	27.000	120.096	0.590	14.99	0.091	2.31	6.50	SPR CG	Z
0.921	23.393	S-474	1.50	38.100	0.761	19.329	29.00	5.075	0.620	15.748	18.000	80.064	0.400	10.16	0.080	2.03	5.00	SST CG	N
0.921	23.393	S-140	1.50	38.100	0.547	13.894	1104.00	193.200	0.150	3.810	163.000	725.024	1.030	26.16	0.187	4.75	5.50	SST CG	N
0.921	23.393	10254	1.56	39.624	0.771	19.583	33.00	5.775	0.470	11.938	16.000	71.168	0.320	8.13	0.075	1.91	4.25	SPR CG	Z
0.921	23.393	3189	1.59	40.386	0.761	19.329	15.00	2.625	0.91										




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
0.938	23.825	11762	1.16 29.464	0.622 15.799	755.00 132.125	0.160 4.064	121.000 538.208	0.710 18.03	0.158 4.01	4.50	SPR	CG Z
0.938	23.825	2609	1.19 30.226	0.614 15.596	605.00 105.875	0.210 5.334	130.000 578.240	0.890 22.61	0.162 4.11	5.50	HD	CG Z
0.938	23.825	GG-41	1.22 30.988	0.758 19.253	46.00 8.050	0.520 13.208	24.000 106.752	0.450 11.43	0.090 2.29	5.00	SST	CG N
0.938	23.825	1617	1.25 31.750	0.826 20.980	5.20 0.910	0.860 21.844	4.400 19.571	0.390 9.91	0.056 1.42	6.00	SPR	C Z
0.938	23.825	10524	1.25 31.750	0.734 18.644	71.00 12.425	0.520 13.208	37.000 164.576	0.590 14.99	0.102 2.59	5.75	SPR	CG Z
0.938	23.825	B2-59	1.25 31.750	0.668 16.967	284.00 49.700	0.390 9.906	110.000 489.280	0.710 18.03	0.135 3.43	5.25	MW	CG N
0.938	23.825	10211	1.38 35.052	0.814 20.676	9.00 1.575	1.000 25.400	9.300 41.366	0.340 8.64	0.062 1.57	5.50	SPR	CG Z
0.938	23.825	10268	1.38 35.052	0.814 20.676	11.00 1.925	0.880 22.352	9.300 41.366	0.370 9.40	0.062 1.57	5.00	SPR	C N
0.938	23.825	S-1123	1.38 35.052	0.768 19.507	26.00 4.550	0.780 19.812	21.000 93.408	0.600 15.24	0.085 2.16	6.00	SST	C N
0.938	23.825	11794	1.38 35.052	0.700 17.780	105.00 18.375	0.530 13.462	56.000 249.088	0.830 21.08	0.119 3.02	7.00	SPR	CG Z
0.938	23.825	11738	1.38 35.052	0.666 16.916	318.00 55.650	0.250 6.350	80.000 355.840	0.680 17.27	0.136 3.45	5.00	SPR	CG Z
0.938	23.825	11724	1.41 35.814	0.754 19.152	43.00 7.525	0.640 16.256	27.000 120.096	0.550 13.97	0.092 2.34	6.00	SPR	CG Z
0.938	23.825	10726	1.50 38.100	0.848 21.539	0.97 0.170	0.980 24.892	0.960 4.270	0.520 13.21	0.045 1.14	10.50	SPR	C Z
0.938	23.825	3885	1.50 38.100	0.738 18.745	54.00 9.450	0.640 16.256	35.000 155.680	0.650 16.51	0.100 2.54	6.50	SPR	CG GI
0.938	23.825	10977	1.50 38.100	0.728 18.491	76.00 13.300	0.530 13.462	40.000 177.920	0.630 16.00	0.105 2.67	6.00	HD	CG Z
0.938	23.825	3625	1.50 38.100	0.688 17.475	137.00 23.975	0.660 16.764	90.000 400.320	0.840 21.34	0.125 3.18	6.75	MW	CG Z
0.938	23.825	CC-34	1.50 38.100	0.618 15.697	355.00 62.125	0.323 8.204	115.000 511.520	1.165 29.59	0.162 4.11	7.20	SST	CG N
0.938	23.825	11149	1.59 40.386	0.698 17.729	121.00 21.175	0.470 11.938	57.000 253.536	0.780 19.81	0.120 3.05	6.50	SPR	CG Z
0.938	23.825	S-443	1.66 42.164	0.838 21.285	3.80 0.665	1.200 30.480	4.600 20.461	0.250 6.35	0.050 1.27	5.00	SST	CG N
0.938	23.825	828	1.75 44.450	0.698 17.729	99.00 17.325	0.580 14.732	57.000 253.536	1.020 25.91	0.120 3.05	7.50	HD	C Z
0.938	23.825	S-940	1.78 45.212	0.794 20.168	13.00 2.275	0.980 24.892	13.000 57.824	0.500 12.70	0.072 1.83	6.00	SST	C N
0.938	23.825	10622	1.78 45.212	0.728 18.491	54.00 9.450	0.690 17.526	37.000 164.576	0.740 18.80	0.105 2.67	7.00	SST	CG N
0.938	23.825	11719	1.84 46.736	0.666 16.916	191.00 33.425	0.420 10.668	80.000 355.840	1.090 27.69	0.136 3.45	7.00	SPR	C Z
0.938	23.825	3683	1.94 49.276	0.810 20.574	5.80 1.015	1.400 35.560	8.100 36.029	0.530 13.46	0.064 1.63	8.25	SPR	CG Z
0.938	23.825	67	2.00 50.800	0.778 19.761	17.00 2.975	1.100 27.940	19.000 84.512	0.670 17.02	0.080 2.03	7.33	HD	C Z
0.938	23.825	S-1361	2.00 50.800	0.770 19.558	15.00 2.625	1.234 31.344	18.500 82.288	0.766 19.46	0.085 2.16	9.00	SST	CG N
0.938	23.825	S-463	2.03 51.562	0.698 17.729	76.00 13.300	0.690 17.526	52.000 231.296	0.990 25.15	0.120 3.05	8.25	SST	CG N
0.938	23.825	12448	2.06 52.324	0.778 19.761	16.00 2.800	1.200 30.480	19.000 84.512	0.620 15.75	0.080 2.03	7.75	SPR	CG N
0.938	23.825	10514	2.13 54.102	0.766 19.456	23.00 4.025	1.000 25.400	23.000 102.304	0.650 16.51	0.085 2.16	7.50	SPR	CG Z
0.938	23.825	3922	2.25 57.150	0.738 18.745	31.00 5.425	1.100 27.940	35.000 155.680	1.000 25.40	0.100 2.54	10.00	SPR	CG Z
0.938	23.825	3458	2.25 57.150	0.688 17.475	109.00 19.075	0.590 14.986	65.000 289.120	1.000 25.40	0.125 3.18	8.00	HD	CG Z
0.938	23.825	12227	2.41 61.214	0.784 19.914	16.00 2.800	1.100 27.940	17.000 75.616	0.620 15.75	0.077 1.96	7.00	SPR	C Z
0.938	23.825	10046	2.50 63.500	0.836 21.234	2.80 0.490	1.900 48.260	5.200 23.130	0.410 10.41	0.051 1.30	7.00	SPR	C Z
0.938	23.825	3295	2.63 66.802	0.624 15.850	193.00 33.775	0.610 15.494	119.000 529.312	1.810 45.97	0.157 3.99	11.50	SPR	CG Z
0.938	23.825	10660	2.66 67.462	0.776 19.710	10.00 1.750	1.700 43.180	17.000 75.616	0.589 14.96	0.081 2.05	7.30	PB	CG N
0.938	23.825	11936	2.78 70.612	0.780 19.812	11.00 1.925	1.600 40.640	18.000 80.064	0.790 20.07	0.079 2.01	10.00	SPR	CG Z
0.938	23.825	12084	2.84 72.136	0.578 14.681	408.00 71.400	0.410 10.414	167.000 742.816	1.890 48.01	0.180 4.57	10.50	SPR	CG Z
0.938	23.825	1701	3.00 76.200	0.794 20.168	6.60 1.155	2.100 53.340	14.000 62.272	0.860 21.84	0.072 1.83	11.00	SPR	C Z
0.938	23.825	832	3.00 76.200	0.728 18.491	30.00 5.250	1.300 33.020	40.000 177.920	1.260 32.00	0.105 2.67	12.00	HD	CG Z
0.938	23.825	3939	3.00 76.200	0.688 17.475	54.00 9.450	1.200 30.480	65.000 289.120	1.750 44.45	0.125 3.18	14.00	SPR	CG Z
0.938	23.825	S-3162	3.25 82.550	0.752 19.101	19.00 3.325	1.300 33.020	26.000 115.648	1.020 25.91	0.093 2.36	10.00	SST	C N
0.938	23.825	42	3.25 82.550	0.524 13.310	588.00 102.900	0.420 10.668	248.000 1103.104	2.790 70.87	0.207 5.26	13.50	HD	CG Z
0.938	23.825	11494	3.38 85.852	0.740 18.796	20.00 3.500	1.700 43.180	34.000 151.232	1.490 37.85	0.100 2.54	14.00	SPR	C Z
0.938	23.825	4287	3.63 92.202	0.794 20.168	7.90 1.383	1.700 43.180	14.000 62.272	0.680 17.27	0.072 1.83	9.50	SPR	CG Z
0.938	23.825	1541	3.75 95.250	0.698 17.729	52.00 9.100	1.100 27.940	57.000 253.536	1.620 41.15	0.120 3.05	12.50	SPR	C Z
0.938	23.825	36	4.00 101.600	0.642 16.307	89.00 15.575	1.200 30.480	103.000 458.144	2.630 66.80	0.148 3.76	17.80	HD	CG Z
0.938	23.825	10650	4.19 106.426	0.804 20.422	4.90 0.858	2.400 60.960	12.000 53.376	0.740 18.80	0.067 1.70	11.00	SPR	CG Z
0.938	23.825	3125	4.31 109.474	0.798 20.269	5.30 0.928	2.400 60.960	13.000 57.824	0.840 21.34	0.070 1.78	12.00	SPR	CG Z
0.938	23.825	S-1407	4.38 111.252	0.814 20.676	1.80 0.315	3.268 83.007	5.900 26.243	1.112 28.24	0.063 1.59	17.80	SST	CG N
0.938	23.825	3931	4.50 114.300	0.626 15.900	122.00 21.350	0.950 24.130	116.000 515.968	2.430 61.72	0.156 3.96	15.80	SPR	CG Z
0.938	23.825	4342	5.00 127.000	0.742 18.847	15.00 2.625	2.200 55.880	33.000 146.784	1.640 41.66	0.098 2.49	16.80	SPR	CG Z
0.938	23.825	332	5.00 127.000	0.584 14.834	175.00 30.625	0.960 24.384	167.000 742.816	3.600 91.44	0.177 4.50	20.30	HD	CG Z
0.938	23.825	2843	5.13 130.302	0.764 19.406	10.00 1.750	2.300 58.420	24.000 106.752	1.310 33.27	0.087 2.21	15.00	SPR	CG GI
0.938	23.825	11627	5.25 133.350	0.642 16.307	67.00 11.725	1.500 38.100	103.000 458.144	3.370 85.60	0.148 3.76	22.80	SPR	CG Z
0.938	23.825	S-154	5.25 133.350	0.642 16.307	55.00 9.625	1.700 43.180	92.000 409.216	3.550 90.17	0.148 3.76	24.00	SST	CG N
0.938	23.825	4149	6.00 152.400	0.754 19.152	9.00 1.575	3.000 76.200	27.000 120.096	2.020 51.31	0.092 2.34	21.00	SPR	C Z
0.938	23.825	3113	6.38 162.052	0.794 20.168	4.10 0.718	3.300 83.820	14.000 62.272	1.190 30.23	0.072 1.83	16.50	SPR	CG Z
0.938	23.825	2569	7.25 184.150	0.728 18.491	15.00 2.625	2.700 68.580	40.000 177.920	2.420 61.47	0.105 2.67	22.00	SPR	C Z
0.938	23.825	11945	8.75 222.250	0.810 20.574	1.10 0.193	6.500 165.100	7.100 31.581	2.240 56.90	0.064 1.63	35.00	SPR	CG Z
0.938	23.825	4233	9.75 247.650	0.698 17.729	23.00 4.025	2.500 63.500	57.000 253.536	3.240 82.30	0.120 3.05	26.00	SPR	C Z
0.938	23.825	3076	10.50 266.700	0.756 19.202	6.80 1.190	3.900 99.060	26.000 115.648	2.340 59.44	0.091 2.31	25.80	SPR	CG Z
0.938	23.825	1938	11.10 281.940	0.664 16.866	29.00 5.							




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.953	24.206	3954	1.75	44.450	0.809	20.549	6.60	1.155	0.920	23.368	6.100	27.133	0.830	21.08	0.072	1.83	10.50	SPR	C	Z
0.953	24.206	3385	1.75	44.450	0.797	20.244	26.00	4.550	0.650	16.510	17.000	75.616	0.390	9.91	0.078	1.98	5.00	SPR	CG	Z
0.953	24.206	11492	1.75	44.450	0.689	17.501	158.00	27.650	0.460	11.684	73.000	324.704	1.060	26.92	0.132	3.35	7.00	SPR	CG	GI
0.953	24.206	2932	1.81	45.974	0.739	18.771	44.00	7.700	0.850	21.590	38.000	169.024	0.960	24.38	0.107	2.72	9.00	SPR	CG	Z
0.953	24.206	S-984	1.91	48.514	0.791	20.091	11.00	1.925	1.108	28.143	12.200	54.266	0.802	20.37	0.082	2.08	9.80	SST	CG	N
0.953	24.206	AA-72	1.94	49.276	0.693	17.602	98.00	17.150	0.700	17.780	69.000	306.912	1.240	31.50	0.130	3.30	9.50	SPR	CG	Z
0.953	24.206	11157	2.00	50.800	0.699	17.755	140.00	24.500	0.480	12.192	67.000	298.016	0.860	21.84	0.127	3.23	6.75	SPR	CG	Z
0.953	24.206	2875	2.13	54.102	0.717	18.212	77.00	13.475	0.700	17.780	54.000	240.192	1.090	27.69	0.118	3.00	8.25	SPR	C	Z
0.953	24.206	10566	2.28	57.912	0.823	20.904	7.00	1.225	1.500	38.100	11.000	48.928	0.540	13.72	0.065	1.65	7.25	SPR	C	Z
0.953	24.206	S-1149	2.75	69.850	0.793	20.142	11.00	1.925	1.600	40.640	17.000	75.616	0.800	20.32	0.080	2.03	9.00	SST	C	N
0.953	24.206	11868	3.00	76.200	0.783	19.888	12.00	2.100	1.700	43.180	21.000	93.408	0.870	22.10	0.085	2.16	10.30	SST	CG	N
0.953	24.206	2917	3.69	93.726	0.711	18.059	51.00	8.925	1.100	27.940	58.000	257.984	1.630	41.40	0.121	3.07	12.50	SPR	C	Z
0.953	24.206	2914	3.75	95.250	0.793	20.142	11.00	1.925	1.700	43.180	18.000	80.064	0.880	22.35	0.080	2.03	10.00	SPR	C	Z
0.953	24.206	11524	3.94	100.076	0.743	18.872	23.00	4.025	1.700	43.180	40.000	177.920	1.630	41.40	0.105	2.67	14.50	SPR	CG	Z
0.953	24.206	11955	4.00	101.600	0.763	19.380	19.00	3.325	1.600	40.640	29.000	128.992	1.240	31.50	0.095	2.41	12.00	SPR	C	Z
0.953	24.206	3423	4.38	111.252	0.819	20.803	4.60	0.805	2.500	63.500	12.000	53.376	0.800	20.32	0.067	1.70	11.00	SPR	C	Z
0.953	24.206	3335	4.44	112.776	0.693	17.602	59.00	10.325	1.200	30.480	69.000	306.912	2.020	51.31	0.130	3.30	14.50	SPR	C	Z
0.953	24.206	2642	4.81	122.174	0.641	16.281	99.00	17.325	1.200	30.480	115.000	511.520	2.960	75.18	0.156	3.96	19.00	SPR	CG	Z
0.953	24.206	11558	7.75	196.850	0.793	20.142	3.30	0.578	5.400	137.160	18.000	80.064	2.400	60.96	0.080	2.03	29.00	SPR	CG	Z
0.953	24.206	3341	8.00	203.200	0.539	13.691	254.00	44.450	0.960	24.384	245.000	1089.760	5.590	141.99	0.207	5.26	27.00	SPR	CG	Z
0.968	24.587	S-182	0.69	17.526	0.786	19.964	86.00	15.050	0.270	6.858	24.000	106.752	0.410	10.41	0.091	2.31	3.50	SST	C	N
0.968	24.587	11911	0.75	19.050	0.880	22.352	1.80	0.315	0.470	11.938	0.860	3.825	0.280	7.11	0.044	1.12	5.33	SST	C	N
0.968	24.587	11692	1.00	25.400	0.844	21.438	9.50	1.663	0.690	17.526	6.600	29.357	0.310	7.87	0.062	1.57	5.00	SPR	CG	Z
0.968	24.587	3657	1.03	26.162	0.842	21.387	15.00	2.625	0.620	15.748	9.400	41.811	0.320	8.13	0.063	1.60	4.00	SPR	C	Z
0.968	24.587	S-1476	1.09	27.686	0.878	22.301	2.20	0.385	0.820	20.828	1.800	8.006	0.270	6.86	0.045	1.14	5.00	SST	C	N
0.968	24.587	S-1140	1.13	28.702	0.882	22.403	2.00	0.350	0.880	22.352	1.700	7.562	0.250	6.35	0.043	1.09	4.75	SPR	C	N
0.968	24.587	S-1256	1.31	33.274	0.874	22.200	3.90	0.683	1.000	25.400	4.000	17.792	0.190	4.83	0.047	1.19	4.00	SST	CG	N
0.968	24.587	PP-78	1.44	36.576	0.848	21.539	6.20	1.085	1.100	27.940	6.700	29.802	0.360	9.14	0.060	1.52	6.00	SPR	CG	Z
0.968	24.587	S-343	1.50	38.100	0.794	20.168	30.00	5.250	0.730	18.542	22.000	97.856	0.480	12.19	0.087	2.21	5.50	SST	CG	N
0.968	24.587	11128	1.50	38.100	0.614	15.596	67.00	11.425	0.240	6.096	163.000	725.024	1.110	28.19	0.177	4.50	6.25	SPR	CG	Z
0.968	24.587	12770	1.56	39.624	0.592	15.037	946.00	165.550	0.190	4.826	184.000	818.432	1.130	28.70	0.188	4.78	6.00	HD	CG	Z
0.968	24.587	11183	1.63	41.402	0.728	18.491	122.00	21.350	0.460	11.684	56.000	249.088	0.720	18.29	0.120	3.05	6.00	SPR	CG	Z
0.968	24.587	S-1230	1.75	44.450	0.888	22.555	0.89	0.156	1.500	38.100	1.300	5.782	0.300	7.62	0.040	1.02	6.50	SST	C	N
0.968	24.587	S-80	1.88	47.752	0.808	20.523	9.70	1.698	1.100	27.940	11.000	48.928	0.760	19.30	0.080	2.03	9.50	SST	CG	N
0.968	24.587	11819	2.00	50.800	0.794	20.168	21.00	3.675	1.000	25.400	22.000	97.856	0.610	15.49	0.087	2.21	7.00	SST	CG	N
0.968	24.587	10484	2.00	50.800	0.718	18.237	107.00	18.725	0.590	14.986	63.000	280.224	0.940	23.88	0.125	3.18	7.50	SPR	CG	Z
0.968	24.587	10510	2.19	55.626	0.816	20.726	17.00	2.975	0.930	23.622	16.000	71.168	0.460	11.68	0.076	1.93	6.00	SPR	CG	Z
0.968	24.587	11106	2.25	57.150	0.874	22.200	2.20	0.385	1.900	48.260	4.300	19.126	0.330	8.38	0.047	1.19	6.00	MW	C	N
0.968	24.587	10496	2.25	57.150	0.852	21.641	3.90	0.683	1.800	45.720	6.900	30.691	0.490	12.45	0.058	1.47	7.50	SPR	C	Z
0.968	24.587	2504	2.25	57.150	0.838	21.285	3.50	0.613	1.500	38.100	5.100	22.685	0.780	19.81	0.065	1.65	12.00	HD	CG	Z
0.968	24.587	3403	2.25	57.150	0.768	19.507	38.00	6.650	0.880	22.352	34.000	151.232	0.780	19.81	0.100	2.54	7.75	SPR	CG	Z
0.968	24.587	3119	2.31	58.674	0.844	21.438	4.10	0.718	1.700	43.180	6.900	30.691	0.620	15.75	0.062	1.57	9.00	SPR	C	Z
0.968	24.587	2952	2.34	59.436	0.824	20.930	11.00	1.925	1.200	30.480	13.000	57.824	0.500	12.70	0.072	1.83	7.00	SPR	CG	Z
0.968	24.587	3018	2.44	61.976	0.808	20.523	11.00	1.925	1.600	30.480	17.000	75.616	1.800	20.32	0.080	2.03	10.00	SPR	CG	Z
0.968	24.587	3223	2.53	64.262	0.812	20.625	15.00	2.625	1.100	27.940	17.000	75.616	0.620	15.75	0.078	1.98	7.00	SPR	C	Z
0.968	24.587	4272	2.63	66.802	0.688	17.475	111.00	19.425	0.760	19.304	85.000	378.080	1.510	38.35	0.140	3.56	10.80	SPR	CG	Z
0.968	24.587	A13-68	2.78	70.612	0.832	21.133	7.50	1.313	1.500	38.100	11.000	48.928	0.480	12.19	0.068	1.73	7.00	SST	CG	N
0.968	24.587	S-429	3.06	77.724	0.780	19.812	15.00	2.625	1.700	43.180	26.000	115.648	1.080	27.43	0.094	2.39	11.50	SST	CG	N
0.968	24.587	B17-176	3.28	83.312	0.718	18.237	42.00	7.350	1.400	35.560	57.000	253.536	1.790	45.47	0.125	3.18	14.30	SST	CG	N
0.968	24.587	3175	3.38	85.852	0.878	22.301	0.94	0.165	2.900	73.660	2.700	12.010	0.450	11.43	0.045	1.14	10.00	SPR	CG	Z
0.968	24.587	11436	3.38	85.852	0.728	18.491	47.00	8.225	1.200	30.480	56.000	249.088	1.500	38.10	0.120	3.05	12.50	SPR	CG	Z
0.968	24.587	3106	3.38	85.852	0.698	17.729	83.00	14.525	0.920	23.368	76.000	338.048	1.620	41.15	0.135	3.43	12.00	SPR	CG	Z
0.968	24.587	1661	3																	




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h
0.975	24.765	72455	0.88 22.352	0.725 18.415	247.00 43.225	0.330 8.382	82.000 364.736	0.550 13.97	0.125 3.18	4.38	MW	CG N
0.975	24.765	72455	0.88 22.352	0.725 18.415	210.00 36.750	0.270 6.858	57.000 253.536	0.550 13.97	0.125 3.18	4.38	SST	CG N
0.975	24.765	72467	0.88 22.352	0.705 17.907	357.00 62.475	0.300 7.620	106.000 471.488	0.570 14.48	0.135 3.43	4.25	MW	CG N
0.975	24.765	72467S	0.88 22.352	0.705 17.907	303.00 53.025	0.230 5.842	68.000 302.464	0.570 14.48	0.135 3.43	4.25	SST	CG N
0.975	24.765	72328S	1.00 25.400	0.849 21.565	16.00 2.800	0.534 13.564	8.500 37.808	0.223 5.66	0.063 1.59	3.60	SST	CG N
0.975	24.765	72328	1.00 25.400	0.849 21.565	18.00 3.150	0.710 18.034	13.000 57.824	0.230 5.84	0.063 1.60	3.63	MW	CG N
0.975	24.765	72340	1.00 25.400	0.831 21.107	28.00 4.900	0.660 16.764	18.000 80.064	0.280 7.11	0.072 1.83	3.88	MW	CG N
0.975	24.765	72340S	1.00 25.400	0.831 21.107	24.00 4.200	0.520 13.208	12.000 53.376	0.280 7.11	0.072 1.83	3.88	SST	CG N
0.975	24.765	72353	1.00 25.400	0.827 21.006	28.00 4.900	0.690 17.526	20.000 88.960	0.310 7.87	0.074 1.88	4.13	MW	CG N
0.975	24.765	72353S	1.00 25.400	0.827 21.006	24.00 4.200	0.560 14.224	13.000 57.824	0.310 7.87	0.074 1.88	4.13	SST	CG N
0.975	24.765	72368	1.00 25.400	0.813 20.650	44.00 7.700	0.600 15.240	26.000 115.648	0.320 8.13	0.081 2.06	4.00	MW	CG N
0.975	24.765	72368S	1.00 25.400	0.813 20.650	37.00 6.475	0.488 12.395	18.100 80.509	0.340 8.64	0.082 2.08	4.10	SST	CG N
0.975	24.765	72380	1.00 25.400	0.805 20.447	52.00 9.100	0.590 14.986	30.000 133.440	0.350 8.89	0.085 2.16	4.13	MW	CG N
0.975	24.765	72380S	1.00 25.400	0.805 20.447	44.00 7.700	0.460 11.684	20.000 88.960	0.350 8.89	0.085 2.16	4.13	SST	CG N
0.975	24.765	72395	1.00 25.400	0.791 20.091	61.00 10.675	0.590 14.986	36.000 160.128	0.410 10.41	0.092 2.34	4.50	MW	CG N
0.975	24.765	72395S	1.00 25.400	0.791 20.091	52.00 9.100	0.470 11.938	24.000 106.752	0.410 10.41	0.092 2.34	4.50	SST	CG N
0.975	24.765	72404S	1.00 25.400	0.783 19.888	63.00 11.025	0.428 10.871	27.000 120.096	0.415 10.54	0.095 2.41	4.40	SST	CG N
0.975	24.765	72404	1.00 25.400	0.783 19.888	74.00 12.950	0.560 14.224	42.000 186.816	0.420 10.67	0.096 2.44	4.38	MW	CG N
0.975	24.765	72416	1.00 25.400	0.765 19.431	101.00 17.675	0.510 12.954	52.000 231.296	0.490 12.45	0.105 2.67	4.63	MW	CG N
0.975	24.765	72416S	1.00 25.400	0.765 19.431	86.00 15.050	0.420 10.668	36.000 160.128	0.490 12.45	0.105 2.67	4.63	SST	CG N
0.975	24.765	72428	1.00 25.400	0.751 19.075	131.00 22.925	0.470 11.938	61.000 271.328	0.530 13.46	0.112 2.84	4.75	MW	CG N
0.975	24.765	72429	1.00 25.400	0.751 19.075	151.00 26.425	0.420 10.668	63.000 280.224	0.490 12.45	0.112 2.84	4.38	MW	CG N
0.975	24.765	72428S	1.00 25.400	0.751 19.075	111.00 19.425	0.370 9.398	41.000 182.368	0.530 13.46	0.112 2.84	4.75	SST	CG N
0.975	24.765	72429S	1.00 25.400	0.751 19.075	128.00 22.400	0.320 8.128	41.000 182.368	0.490 12.45	0.112 2.84	4.38	SST	CG N
0.975	24.765	72456	1.00 25.400	0.725 18.415	207.00 36.225	0.410 10.414	84.000 373.632	0.590 14.99	0.125 3.18	4.75	MW	CG N
0.975	24.765	72456S	1.00 25.400	0.725 18.415	176.00 30.800	0.320 8.128	57.000 253.536	0.590 14.99	0.125 3.18	4.75	SST	CG N
0.975	24.765	72468	1.00 25.400	0.705 17.907	298.00 52.150	0.360 9.144	106.000 471.488	0.640 16.26	0.135 3.43	4.75	MW	CG N
0.975	24.765	72468S	1.00 25.400	0.705 17.907	253.00 44.275	0.270 6.858	68.000 302.464	0.640 16.26	0.135 3.43	4.75	SST	CG N
0.975	24.765	72475	1.00 25.400	0.679 17.247	459.00 80.325	0.300 7.620	139.000 618.272	0.680 17.27	0.148 3.76	4.63	MW	CG N
0.975	24.765	72475S	1.00 25.400	0.679 17.247	390.00 68.250	0.230 5.842	89.000 395.872	0.680 17.27	0.148 3.76	4.63	SST	CG N
0.975	24.765	72329S	1.25 31.750	0.849 21.565	12.00 2.100	0.711 18.059	8.500 37.808	0.256 6.50	0.063 1.59	4.10	SST	CG N
0.975	24.765	72329	1.25 31.750	0.849 21.565	14.00 2.450	0.910 23.114	13.000 57.824	0.260 6.60	0.063 1.60	4.13	MW	CG N
0.975	24.765	72341	1.25 31.750	0.831 21.107	22.00 3.850	0.850 21.590	18.000 80.064	0.320 8.13	0.072 1.83	4.38	MW	CG N
0.975	24.765	72341S	1.25 31.750	0.831 21.107	18.00 3.150	0.670 17.018	12.000 53.376	0.320 8.13	0.072 1.83	4.38	SST	CG N
0.975	24.765	72354	1.25 31.750	0.827 21.006	22.00 3.850	0.900 22.860	19.000 84.512	0.350 8.89	0.074 1.88	4.75	MW	CG N
0.975	24.765	72354S	1.25 31.750	0.827 21.006	18.00 3.150	0.730 18.542	13.000 57.824	0.350 8.89	0.074 1.88	4.75	SST	CG N
0.975	24.765	72369	1.25 31.750	0.813 20.650	34.00 5.950	0.770 19.558	26.000 115.648	0.360 9.14	0.081 2.06	4.50	MW	CG N
0.975	24.765	72369S	1.25 31.750	0.813 20.650	29.00 5.075	0.623 15.824	18.100 80.509	0.377 9.58	0.082 2.08	4.60	SST	CG N
0.975	24.765	72381	1.25 31.750	0.805 20.447	40.00 7.000	0.760 19.304	30.000 133.440	0.400 10.16	0.085 2.16	4.75	MW	CG N
0.975	24.765	72381S	1.25 31.750	0.805 20.447	34.00 5.950	0.600 15.240	20.000 88.960	0.400 10.16	0.085 2.16	4.75	SST	CG N
0.975	24.765	72396	1.25 31.750	0.791 20.091	47.00 8.225	0.770 19.558	36.000 160.128	0.480 12.19	0.092 2.34	5.25	MW	CG N
0.975	24.765	72396S	1.25 31.750	0.791 20.091	40.00 7.000	0.610 15.494	24.000 106.752	0.480 12.19	0.092 2.34	5.25	SST	CG N
0.975	24.765	72405S	1.25 31.750	0.783 19.888	48.00 8.400	0.562 14.275	27.000 120.096	0.486 12.34	0.095 2.41	5.10	SST	CG N
0.975	24.765	72405	1.25 31.750	0.783 19.888	56.00 9.800	0.740 18.796	42.000 186.816	0.490 12.45	0.096 2.44	5.13	MW	CG N
0.975	24.765	72417	1.25 31.750	0.765 19.431	81.00 14.175	0.670 17.018	54.000 240.192	0.550 13.97	0.105 2.67	5.25	MW	CG N
0.975	24.765	72417S	1.25 31.750	0.765 19.431	69.00 12.075	0.520 13.208	36.000 160.128	0.550 13.97	0.105 2.67	5.25	SST	CG N
0.975	24.765	72430	1.25 31.750	0.751 19.075	102.00 17.850	0.620 15.748	63.000 280.224	0.620 15.75	0.112 2.84	5.50	MW	CG N
0.975	24.765	72430S	1.25 31.750	0.751 19.075	87.00 15.225	0.480 12.192	41.000 182.368	0.620 15.75	0.112 2.84	5.50	SST	CG N
0.975	24.765	72457	1.25 31.750	0.725 21.006	22.00 27.125	0.550 13.970	85.000 378.080	0.700 17.78	0.125 3.18	5.63	MW	CG N
0.975	24.765	72457S	1.25 31.750	0.725 21.006	18.00 23.100	0.430 10.922	57.000 253.536	0.700 17.78	0.125 3.18	5.63	SST	CG N
0.975	24.765	72330S	1.50 38.100	0.849 21.565	9.90 1.733	0.862 21.895	8.500 37.808	0.284 7.21	0.063 1.59	4.50	SST	CG N
0.975	24.765	72330	1.50 38.100	0.849 21.565	12.00 2.100	1.100 27.940	13.000 57.824	0.290 7.37	0.063 1.60	4.63	MW	CG N
0.975	24.765	72342	1.50 38.100	0.831 21.107	18.00 3.150	1.000 25.400	18.000 80.064	0.360 9.14	0.072 1.83	5.00	MW	CG N
0.975	24.765	72342S	1.50 38.100	0.831 21.107	15.00 2.625	0.830 21.082	12.000 53.376	0.360 9.14	0.072 1.83	5.00	SST	CG N
0.975	24.765	72355	1.50 38.100	0.827 21.006	18.00 3.150	1.100 27.940	20.000 88.960	0.400 10.16	0.074 1.88	5.38	MW	CG N
0.975	24.765	72355S	1.50 38.100	0.827 21.006	15.00 2.625	0.890 22.606	13.000 57.824	0.400 10.16	0.074 1.88	5.38	SST	CG N
0.975	24.765	72370	1.50 38.100	0.813 20.650	28.00 4.900	0.950 24.130	26.000 115.648	0.420 10.67	0.081 2.06	5.13	MW	CG N
0.975	24.765	72370S	1.50 38.100	0.813 20.650	23.00 4.025	0.785 19.939	18.100 80.509	0.447 11.35	0.082 2.08	5.50	SST	CG N
0.975	24.765	72382	1.50 38.100	0.805 20.447	32.00 5.600	0.940 23.876	30.000 133.440	0.450 11.43	0.085 2.16	5.25	MW	CG N
0.975	24.765	72382S	1.50 38.100	0.805 20.447	27.00 4.725	0.740 18.796	20.000 88.960	0.450 11.43	0.085 2.16	5.25	SST	CG N
0.975	24.765	72397	1.50 38.100	0.791 20.091	38.00 6.650	0.950 24.130	36.000 160.128	0.550 13.97	0.092 2.34	6.00	MW	CG N
0.975	24.765	72397S	1.50 38.100	0.791 20.091	32.00 5.600							




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.975	24.765	72343	1.75	44.450	0.831	21.107	15.00	2.625	1.200	30.480	18.000	80.064	0.400	10.16	0.072	1.83	5.50	MW CG N
0.975	24.765	72343S	1.75	44.450	0.831	21.107	13.00	2.275	0.980	24.892	12.000	53.376	0.400	10.16	0.072	1.83	5.50	SST CG N
0.975	24.765	72357	1.75	44.450	0.827	21.006	16.00	2.800	1.300	33.020	20.000	88.960	0.430	10.92	0.074	1.88	5.75	MW CG N
0.975	24.765	72357S	1.75	44.450	0.827	21.006	13.00	2.275	1.000	25.400	13.000	57.824	0.430	10.92	0.074	1.88	5.75	SST CG N
0.975	24.765	72371	1.75	44.450	0.813	20.650	23.00	4.025	1.100	27.940	26.000	115.648	0.470	11.94	0.081	2.06	5.75	MW CG N
0.975	24.765	72371S	1.75	44.450	0.813	20.650	20.00	3.500	0.903	22.936	18.100	80.509	0.489	12.42	0.082	2.08	6.00	SST CG N
0.975	24.765	72383	1.75	44.450	0.805	20.447	30.00	5.250	1.000	25.400	30.000	133.440	0.470	11.94	0.085	2.16	5.50	MW CG N
0.975	24.765	72384	1.75	44.450	0.805	20.447	25.00	4.375	1.200	30.480	30.000	133.440	0.530	13.46	0.085	2.16	6.25	MW CG N
0.975	24.765	72383S	1.75	44.450	0.805	20.447	26.00	4.550	0.790	20.066	20.000	88.960	0.470	11.94	0.085	2.16	5.50	SST CG N
0.975	24.765	72384S	1.75	44.450	0.805	20.447	21.00	3.675	0.960	24.384	20.000	88.960	0.530	13.46	0.085	2.16	6.25	SST CG N
0.975	24.765	72407S	1.75	44.450	0.783	19.888	34.00	5.950	0.793	20.142	27.000	120.096	0.607	15.42	0.095	2.41	6.40	SST CG N
0.975	24.765	72407	1.75	44.450	0.783	19.888	40.00	7.000	1.000	25.400	42.000	186.816	0.620	15.75	0.096	2.44	6.50	MW CG N
0.975	24.765	72419	1.75	44.450	0.765	19.431	54.00	9.450	1.000	25.400	54.000	240.192	0.720	18.29	0.105	2.67	6.88	MW CG N
0.975	24.765	72419S	1.75	44.450	0.765	19.431	46.00	8.050	0.780	19.812	36.000	160.128	0.720	18.29	0.105	2.67	6.88	SST CG N
0.975	24.765	72432	1.75	44.450	0.751	19.075	60.00	10.500	0.680	17.272	41.000	182.368	0.780	19.81	0.112	2.84	7.00	SST CG N
0.975	24.765	72432S	1.75	44.450	0.751	19.075	60.00	10.500	0.680	17.272	41.000	182.368	0.780	19.81	0.112	2.84	7.00	SST CG N
0.975	24.765	72440	1.75	44.450	0.745	18.923	78.00	13.650	0.880	22.352	68.000	302.464	0.820	20.83	0.115	2.92	7.13	MW CG N
0.975	24.765	72440S	1.75	44.450	0.745	18.923	66.00	11.550	0.670	17.018	45.000	200.160	0.820	20.83	0.115	2.92	7.13	SST CG N
0.975	24.765	72448	1.75	44.450	0.735	18.669	95.00	16.625	0.810	20.574	77.000	342.496	0.840	21.34	0.120	3.05	7.00	MW CG N
0.975	24.765	72448S	1.75	44.450	0.735	18.669	81.00	14.175	0.630	16.002	51.000	226.848	0.840	21.34	0.120	3.05	7.00	SST CG N
0.975	24.765	72459	1.75	44.450	0.725	18.415	109.00	19.075	0.800	20.320	87.000	386.976	0.910	23.11	0.125	3.18	7.25	MW CG N
0.975	24.765	72459S	1.75	44.450	0.725	18.415	93.00	16.275	0.610	15.494	57.000	253.536	0.910	23.11	0.125	3.18	7.25	SST CG N
0.975	24.765	72332S	2.00	50.800	0.849	21.565	7.30	1.278	1.170	29.718	8.500	37.808	0.340	8.64	0.063	1.59	5.40	SST CG N
0.975	24.765	72332	2.00	50.800	0.849	21.565	8.50	1.488	1.500	38.100	13.000	57.824	0.350	8.89	0.063	1.60	5.50	MW CG N
0.975	24.765	72344	2.00	50.800	0.831	21.107	13.00	2.275	1.400	35.560	18.000	80.064	0.440	11.18	0.072	1.83	6.13	MW CG N
0.975	24.765	72344S	2.00	50.800	0.831	21.107	11.00	1.925	1.100	27.940	12.000	53.376	0.440	11.18	0.072	1.83	6.13	SST CG N
0.975	24.765	72358	2.00	50.800	0.827	21.006	13.00	2.275	1.500	38.100	19.000	84.512	0.490	12.45	0.074	1.88	6.63	MW CG N
0.975	24.765	72358S	2.00	50.800	0.827	21.006	11.00	1.925	1.200	30.480	13.000	57.824	0.490	12.45	0.074	1.88	6.63	SST CG N
0.975	24.765	72372	2.00	50.800	0.813	20.650	20.00	3.500	1.300	33.020	26.000	115.648	0.510	12.95	0.081	2.06	6.25	MW CG N
0.975	24.765	72372S	2.00	50.800	0.813	20.650	17.00	2.975	1.062	26.975	18.100	80.509	0.547	13.89	0.082	2.08	6.70	SST CG N
0.975	24.765	72385	2.00	50.800	0.805	20.447	23.00	4.025	1.300	33.020	30.000	133.440	0.550	13.97	0.085	2.16	6.50	MW CG N
0.975	24.765	72385S	2.00	50.800	0.805	20.447	20.00	3.500	1.000	25.400	20.000	88.960	0.550	13.97	0.085	2.16	6.50	SST CG N
0.975	24.765	72398	2.00	50.800	0.791	20.091	27.00	4.725	1.300	33.020	36.000	160.128	0.690	17.53	0.092	2.34	7.50	MW CG N
0.975	24.765	72398S	2.00	50.800	0.791	20.091	23.00	4.025	1.000	25.400	24.000	106.752	0.690	17.53	0.092	2.34	7.50	SST CG N
0.975	24.765	72408S	2.00	50.800	0.783	19.888	28.00	4.900	0.963	24.460	27.000	120.096	0.697	17.70	0.095	2.41	7.30	SST CG N
0.975	24.765	72408	2.00	50.800	0.783	19.888	35.00	6.125	1.300	33.020	42.000	186.816	0.710	18.03	0.096	2.44	7.38	MW CG N
0.975	24.765	72420	2.00	50.800	0.765	19.431	47.00	8.225	1.200	30.480	54.000	240.192	0.800	20.32	0.105	2.67	7.63	MW CG N
0.975	24.765	72420S	2.00	50.800	0.765	19.431	40.00	7.000	0.900	22.860	36.000	160.128	0.800	20.32	0.105	2.67	7.63	SST CG N
0.975	24.765	72433	2.00	50.800	0.751	19.075	59.00	10.325	1.100	27.940	63.000	280.224	0.900	22.86	0.112	2.84	8.00	MW CG N
0.975	24.765	72433S	2.00	50.800	0.751	19.075	50.00	8.750	0.820	20.828	41.000	182.368	0.900	22.86	0.112	2.84	8.00	SST CG N
0.975	24.765	72441	2.00	50.800	0.745	18.923	68.00	11.900	1.000	25.400	68.000	302.464	0.910	23.11	0.115	2.92	7.88	MW CG N
0.975	24.765	72441S	2.00	50.800	0.745	18.923	58.00	10.150	0.770	19.558	45.000	200.160	0.910	23.11	0.115	2.92	7.88	SST CG N
0.975	24.765	72449	2.00	50.800	0.735	18.669	82.00	14.350	0.940	23.876	77.000	342.496	0.950	24.13	0.120	3.05	7.88	MW CG N
0.975	24.765	72449S	2.00	50.800	0.735	18.669	70.00	12.250	0.730	18.542	51.000	226.848	0.950	24.13	0.120	3.05	7.88	SST CG N
0.975	24.765	72460	2.00	50.800	0.725	18.415	94.00	16.450	0.930	23.622	87.000	386.976	1.020	25.91	0.125	3.18	8.13	MW CG N
0.975	24.765	72460S	2.00	50.800	0.725	18.415	80.00	14.000	0.710	18.034	57.000	253.536	1.020	25.91	0.125	3.18	8.13	SST CG N
0.975	24.765	72470	2.00	50.800	0.705	17.907	126.00	22.050	0.850	21.590	106.000	471.488	1.130	28.70	0.135	3.43	8.38	MW CG N
0.975	24.765	72470S	2.00	50.800	0.705	17.907	107.00	18.725	0.640	16.256	68.000	302.464	1.130	28.70	0.135	3.43	8.38	SST CG N
0.975	24.765	72477	2.00	50.800	0.679	17.247	190.00	33.250	0.730	18.542	139.000	618.272	1.240	31.50	0.148	3.76	8.38	MW CG N
0.975	24.765	72477S	2.00	50.800	0.679	17.247	161.00	28.175	0.550	13.970	89.000	395.872	1.240	31.50	0.148	3.76	8.38	SST CG N
0.975	24.765	72483	2.00	50.800	0.651	16.535	291.00	50.925	0.600	15.240	176.000	782.848	1.360	34.54	0.162	4.11	8.38	MW CG N
0.975	24.765	72483S	2.00	50.800	0.651	16.535	248.00	43.400	0.450	11.430	111.000	493.728	1.360	34.54	0.162	4.11	8.38	SST CG N
0.975	24.765	72333	2.25	57.150	0.849	21.565	6.40	1.120	1.334	33.884	8.500	37.808	0.370	9.40	0.063	1.59	5.90	SST CG N
0.975	24.765	72333S	2.25	57.150	0.849	21.565	7.50	1.313	1.700	43.180	13.000	57.824	0.380	9.65	0.063	1.60	6.00	MW CG N
0.975	24.765																	




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Ends Mat'l	F n sh									
0.975	24.765	72361	2.50	63.500	0.827	21.006	10.00	1.750	1.900	48.260	20.000	88.960	0.570	14.48	0.074	1.88	7.75	MW	CG	N
0.975	24.765	72363	2.50	63.500	0.827	21.006	8.70	1.523	1.600	40.640	13.000	57.824	0.570	14.48	0.074	1.88	7.75	SST	CG	N
0.975	24.765	72374	2.50	63.500	0.813	20.650	16.00	2.800	1.700	43.180	26.000	115.648	0.610	15.49	0.081	2.06	7.50	MW	CG	N
0.975	24.765	72374S	2.50	63.500	0.813	20.650	13.00	2.275	1.389	35.281	18.100	80.509	0.665	16.89	0.082	2.08	8.10	SST	CG	N
0.975	24.765	72388	2.50	63.500	0.805	20.447	18.00	3.150	1.600	40.640	30.000	133.440	0.660	16.76	0.085	2.16	7.75	MW	CG	N
0.975	24.765	72388S	2.50	63.500	0.805	20.447	16.00	2.800	1.300	33.020	20.000	88.960	0.660	16.76	0.085	2.16	7.75	SST	CG	N
0.975	24.765	72399	2.50	63.500	0.791	20.091	22.00	3.850	1.700	43.180	36.000	160.128	0.830	21.08	0.092	2.34	9.00	MW	CG	N
0.975	24.765	72399S	2.50	63.500	0.791	20.091	18.00	3.150	1.300	33.020	24.000	106.752	0.830	21.08	0.092	2.34	9.00	SST	CG	N
0.975	24.765	72410S	2.50	63.500	0.783	19.888	22.00	3.850	1.225	31.115	27.000	120.096	0.835	21.21	0.095	2.41	8.80	SST	CG	N
0.975	24.765	72410	2.50	63.500	0.783	19.888	26.00	4.550	1.600	40.640	42.000	186.816	0.850	21.59	0.096	2.44	8.88	MW	CG	N
0.975	24.765	72422	2.50	63.500	0.765	19.431	36.00	6.300	1.500	38.100	54.000	240.192	0.970	24.64	0.105	2.67	9.25	MW	CG	N
0.975	24.765	72422S	2.50	63.500	0.765	19.431	31.00	5.425	1.200	30.480	36.000	160.128	0.970	24.64	0.105	2.67	9.25	SST	CG	N
0.975	24.765	72435	2.50	63.500	0.751	19.075	46.00	8.050	1.400	35.560	63.000	280.224	1.080	27.43	0.112	2.84	9.63	MW	CG	N
0.975	24.765	72435S	2.50	63.500	0.751	19.075	39.00	6.825	1.100	27.940	41.000	182.368	1.080	27.43	0.112	2.84	9.63	SST	CG	N
0.975	24.765	72443	2.50	63.500	0.745	18.923	52.00	9.100	1.300	33.020	68.000	302.464	1.110	28.19	0.115	2.92	9.63	MW	CG	N
0.975	24.765	72443S	2.50	63.500	0.745	18.923	44.00	7.700	1.000	25.400	45.000	200.160	1.110	28.19	0.115	2.92	9.63	SST	CG	N
0.975	24.765	72451	2.50	63.500	0.735	18.669	64.00	11.200	1.200	30.480	77.000	342.496	1.140	28.96	0.120	3.05	9.50	MW	CG	N
0.975	24.765	72451S	2.50	63.500	0.735	18.669	54.00	9.450	0.930	23.622	51.000	226.848	1.140	28.96	0.120	3.05	9.50	SST	CG	N
0.975	24.765	72462	2.50	63.500	0.725	18.415	73.00	12.775	1.200	30.480	87.000	386.976	1.230	31.24	0.125	3.18	9.88	MW	CG	N
0.975	24.765	72462S	2.50	63.500	0.725	18.415	62.00	10.850	0.920	23.368	57.000	253.536	1.230	31.24	0.125	3.18	9.88	SST	CG	N
0.975	24.765	72471	2.50	63.500	0.705	17.907	98.00	17.150	1.100	27.940	106.000	471.488	1.380	35.05	0.135	3.43	10.30	MW	CG	N
0.975	24.765	72471S	2.50	63.500	0.705	17.907	83.00	14.525	0.820	20.828	68.000	302.464	1.380	35.05	0.135	3.43	10.30	SST	CG	N
0.975	24.765	72478	2.50	63.500	0.679	17.247	147.00	25.725	0.950	24.130	139.000	618.272	1.540	39.12	0.148	3.76	10.40	MW	CG	N
0.975	24.765	72478S	2.50	63.500	0.679	17.247	125.00	21.875	0.720	18.288	89.000	395.872	1.540	39.12	0.148	3.76	10.40	SST	CG	N
0.975	24.765	72484	2.50	63.500	0.651	16.535	224.00	39.200	0.780	19.812	176.000	782.848	1.660	42.16	0.162	4.11	10.30	MW	CG	N
0.975	24.765	72484S	2.50	63.500	0.651	16.535	191.00	33.425	0.580	14.732	111.000	493.728	1.660	42.16	0.162	4.11	10.30	SST	CG	N
0.975	24.765	72335S	2.75	69.850	0.849	21.565	5.20	0.910	1.642	41.707	8.500	37.808	0.427	10.85	0.063	1.59	6.80	SST	CG	N
0.975	24.765	72335	2.75	69.850	0.849	21.565	6.10	1.068	2.100	53.340	13.000	57.824	0.430	10.92	0.063	1.60	6.88	MW	CG	N
0.975	24.765	72347	2.75	69.850	0.831	21.107	9.20	1.610	2.000	50.800	18.000	80.064	0.560	14.22	0.072	1.83	7.75	MW	CG	N
0.975	24.765	72347S	2.75	69.850	0.831	21.107	7.80	1.365	1.600	40.640	12.000	53.376	0.560	14.22	0.072	1.83	7.75	SST	CG	N
0.975	24.765	72363	2.75	69.850	0.827	21.006	9.60	1.680	2.100	53.340	20.000	88.960	0.600	15.24	0.074	1.88	8.13	MW	CG	N
0.975	24.765	72363S	2.75	69.850	0.827	21.006	8.20	1.435	1.600	40.640	13.000	57.824	0.600	15.24	0.074	1.88	8.13	SST	CG	N
0.975	24.765	72375	2.75	69.850	0.813	20.650	14.00	2.450	1.800	45.720	26.000	115.648	0.650	16.51	0.081	2.06	8.00	MW	CG	N
0.975	24.765	72375S	2.75	69.850	0.813	20.650	12.00	2.100	1.505	38.227	18.100	80.509	0.706	17.93	0.082	2.08	8.60	SST	CG	N
0.975	24.765	72389	2.75	69.850	0.805	20.447	18.00	3.150	1.600	40.640	30.000	133.440	0.660	16.76	0.085	2.16	7.75	MW	CG	N
0.975	24.765	72390	2.75	69.850	0.805	20.447	13.00	2.275	1.600	40.640	20.000	88.960	0.660	16.76	0.085	2.16	7.75	SST	CG	N
0.975	24.765	72411S	2.75	69.850	0.783	19.888	21.00	3.675	1.284	32.614	27.000	120.096	0.866	22.00	0.095	2.41	9.10	SST	CG	N
0.975	24.765	72411	2.75	69.850	0.783	19.888	24.00	4.200	1.700	43.180	42.000	186.816	0.900	22.86	0.096	2.44	9.38	MW	CG	N
0.975	24.765	72423	2.75	69.850	0.765	19.431	33.00	5.775	1.700	43.180	54.000	240.192	1.060	26.92	0.105	2.67	10.10	MW	CG	N
0.975	24.765	72423S	2.75	69.850	0.765	19.431	28.00	4.900	1.300	33.020	36.000	160.128	1.060	26.92	0.105	2.67	10.10	SST	CG	N
0.975	24.765	72436	2.75	69.850	0.751	19.075	43.00	7.525	1.500	38.100	63.000	280.224	1.130	28.70	0.112	2.84	10.10	MW	CG	N
0.975	24.765	72436S	2.75	69.850	0.751	19.075	37.00	6.475	1.100	27.940	41.000	182.368	1.130	28.70	0.112	2.84	10.10	SST	CG	N
0.975	24.765	72463	2.75	69.850	0.725	18.415	62.00	10.850	1.300	33.020	84.000	373.632	1.410	35.81	0.125	3.18	11.30	MW	CG	N
0.975	24.765	72463S	2.75	69.850	0.725	18.415	53.00	9.275	1.100	27.940	57.000	253.536	1.410	35.81	0.125	3.18	11.30	SST	CG	N
0.975	24.765	72363S	3.00	76.200	0.849	21.565	4.70	0.823	1.816	46.126	8.500	37.808	0.459	11.66	0.063	1.59	7.30	SST	CG	N
0.975	24.765	72336	3.00	76.200	0.849	21.565	5.60	0.980	2.300	58.420	13.000	57.824	0.460	11.68	0.063	1.60	7.38	MW	CG	N
0.975	24.765	72348	3.00	76.200	0.831	21.107	8.40	1.470	2.200	55.880	18.000	80.064	0.590	14.99	0.072	1.83	8.25	MW	CG	N
0.975	24.765	72348S	3.00	76.200	0.831	21.107	7.10	1.243	1.700	43.180	12.000	53.376	0.590	14.99	0.072	1.83	8.25	SST	CG	N
0.975	24.765	72364	3.00	76.200	0.827	21.006	8.40	1.470	2.300	58.420	20.000	88.960	0.670	17.02	0.074	1.88	9.00	MW	CG	N
0.975	24.765	72364S	3.00	76.200	0.827	21.006	7.10	1.243	2.000	50.800	36.000	115.648	0.670	17.02	0.074	1.88	9.00	SST	CG	N
0.975	24.765	72376	3.00	76.200	0.813	20.650	13.00	2.275	2.000	50.800	26.000	115.648	0.700	17.78	0.081	2.06	8.63	MW	CG	N
0.975	24.765	72376S	3.00	76.200	0.813	20.650	11.00	1.925	1.641	41.681	18.100	80.509	0.756	19.20	0.082					




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
0.975	24.765	72365	3.50 88.900	0.827 21.006	7.10 1.243	2.700 68.580	19.000 84.512	0.760 19.30	0.074 1.88	10.30	MW CG	N
0.975	24.765	72365S	3.50 88.900	0.827 21.006	6.00 1.050	2.200 55.880	13.000 57.824	0.760 19.30	0.074 1.88	10.30	SST CG	N
0.975	24.765	72377	3.50 88.900	0.813 20.650	11.00 1.925	2.400 60.960	26.000 115.648	0.790 20.07	0.081 2.06	9.75	MW CG	N
0.975	24.765	72377S	3.50 88.900	0.813 20.650	9.40 1.645	1.921 48.793	18.100 80.509	0.856 21.74	0.082 2.08	10.40	SST CG	N
0.975	24.765	72392	3.50 88.900	0.805 20.447	13.00 2.275	2.300 58.420	30.000 133.440	0.870 22.10	0.085 2.16	10.30	MW CG	N
0.975	24.765	72392S	3.50 88.900	0.805 20.447	11.00 1.925	1.900 48.260	20.000 88.960	0.870 22.10	0.085 2.16	10.25	SST CG	N
0.975	24.765	72401	3.50 88.900	0.791 20.091	15.00 2.625	2.400 60.960	36.000 160.128	1.100 27.94	0.092 2.34	12.00	MW CG	N
0.975	24.765	72401S	3.50 88.900	0.791 20.091	13.00 2.275	1.900 48.260	24.000 106.752	1.100 27.94	0.092 2.34	12.00	SST CG	N
0.975	24.765	72413S	3.50 88.900	0.783 19.888	15.00 2.625	1.797 45.644	27.000 120.096	1.136 28.85	0.095 2.41	12.00	SST CG	N
0.975	24.765	72413	3.50 88.900	0.783 19.888	18.00 3.150	2.300 58.420	42.000 186.816	1.140 28.96	0.096 2.44	11.90	MW CG	N
0.975	24.765	72425	3.50 88.900	0.765 19.431	26.00 4.550	2.100 53.340	54.000 240.192	1.300 33.02	0.105 2.67	12.40	MW CG	N
0.975	24.765	72425S	3.50 88.900	0.765 19.431	22.00 3.850	1.600 40.640	36.000 160.128	1.300 33.02	0.105 2.67	12.40	SST CG	N
0.975	24.765	72438	3.50 88.900	0.751 19.075	32.00 5.600	2.000 50.800	63.000 280.224	1.460 37.08	0.112 2.84	13.00	MW CG	N
0.975	24.765	72438S	3.50 88.900	0.751 19.075	27.00 4.725	1.500 38.100	41.000 182.368	1.460 37.08	0.112 2.84	13.00	SST CG	N
0.975	24.765	72445	3.50 88.900	0.745 18.923	36.00 6.300	1.900 48.260	68.000 302.464	1.500 38.10	0.115 2.92	13.00	MW CG	N
0.975	24.765	72445S	3.50 88.900	0.745 18.923	31.00 5.425	1.500 38.100	45.000 200.160	1.500 38.10	0.115 2.92	13.00	SST CG	N
0.975	24.765	72453	3.50 88.900	0.735 18.669	44.00 7.700	1.800 45.720	77.000 342.496	1.550 39.37	0.120 3.05	12.90	MW CG	N
0.975	24.765	72453S	3.50 88.900	0.735 18.669	37.00 6.475	1.400 35.560	51.000 226.848	1.550 39.37	0.120 3.05	12.90	SST CG	N
0.975	24.765	72465	3.50 88.900	0.725 18.415	50.00 8.750	1.700 43.180	87.000 386.976	1.670 42.42	0.125 3.18	13.40	MW CG	N
0.975	24.765	72465S	3.50 88.900	0.725 18.415	43.00 7.525	1.300 33.020	57.000 253.536	1.670 42.42	0.125 3.18	13.40	SST CG	N
0.975	24.765	72473	3.50 88.900	0.705 17.907	67.00 11.725	1.600 40.640	106.000 471.488	1.890 48.01	0.135 3.43	14.00	MW CG	N
0.975	24.765	72473S	3.50 88.900	0.705 17.907	57.00 9.975	1.200 30.480	68.000 302.464	1.890 48.01	0.135 3.43	14.00	SST CG	N
0.975	24.765	72480	3.50 88.900	0.679 17.247	101.00 17.675	1.400 35.560	139.000 618.272	2.090 53.09	0.148 3.76	14.10	MW CG	N
0.975	24.765	72480S	3.50 88.900	0.679 17.247	86.00 15.050	1.000 25.400	89.000 395.872	2.090 53.09	0.148 3.76	14.10	SST CG	N
0.975	24.765	72486	3.50 88.900	0.651 16.535	154.00 26.950	1.100 27.940	176.000 782.848	2.270 57.66	0.162 4.11	14.00	MW CG	N
0.975	24.765	72486S	3.50 88.900	0.651 16.535	131.00 22.925	0.850 21.590	111.000 493.728	2.270 57.66	0.162 4.11	14.00	SST CG	N
0.975	24.765	72338S	4.00 101.600	0.849 21.565	3.50 0.613	2.439 61.951	8.500 37.808	0.573 14.55	0.063 1.59	9.20	SST CG	N
0.975	24.765	72338	4.00 101.600	0.849 21.565	4.10 0.718	3.200 81.280	13.000 57.824	0.580 14.73	0.063 1.60	9.25	MW CG	N
0.975	24.765	72350	4.00 101.600	0.831 21.107	6.20 1.085	3.000 76.200	18.000 80.064	0.760 19.30	0.072 1.83	10.50	MW CG	N
0.975	24.765	72350S	4.00 101.600	0.831 21.107	5.30 0.928	2.300 58.420	12.000 53.376	0.760 19.30	0.072 1.83	10.50	SST CG	N
0.975	24.765	72366	4.00 101.600	0.827 21.006	6.20 1.085	3.100 78.740	20.000 88.960	0.850 21.59	0.074 1.88	11.50	MW CG	N
0.975	24.765	72366S	4.00 101.600	0.827 21.006	5.30 0.928	2.600 66.040	13.000 57.824	0.850 21.59	0.074 1.88	11.50	SST CG	N
0.975	24.765	72378	4.00 101.600	0.813 20.650	9.70 1.698	2.700 68.580	26.000 115.648	0.890 22.61	0.081 2.06	11.00	MW CG	N
0.975	24.765	72378S	4.00 101.600	0.813 20.650	8.20 1.435	2.202 55.931	18.100 80.509	0.958 24.33	0.082 2.08	11.70	SST CG	N
0.975	24.765	72393	4.00 101.600	0.805 20.447	12.00 2.100	2.400 60.960	30.000 133.440	0.890 22.61	0.085 2.16	10.50	MW CG	N
0.975	24.765	72393S	4.00 101.600	0.805 20.447	11.00 1.925	1.900 48.260	20.000 88.960	0.890 22.61	0.085 2.16	10.50	SST CG	N
0.975	24.765	72402	4.00 101.600	0.791 20.091	13.00 2.275	2.800 71.120	36.000 160.128	1.240 31.50	0.092 2.34	13.50	MW CG	N
0.975	24.765	72402S	4.00 101.600	0.791 20.091	11.00 1.925	2.200 55.880	24.000 106.752	1.240 31.50	0.092 2.34	13.50	SST CG	N
0.975	24.765	72414S	4.00 101.600	0.783 19.888	14.00 2.450	1.926 48.920	27.000 120.096	1.204 30.58	0.095 2.41	12.70	SST CG	N
0.975	24.765	72414	4.00 101.600	0.783 19.888	16.00 2.800	2.600 66.040	42.000 186.816	1.260 32.00	0.096 2.44	13.10	MW CG	N
0.975	24.765	72426	4.00 101.600	0.765 19.431	22.00 3.850	2.400 60.960	54.000 240.192	1.460 37.08	0.105 2.67	13.90	MW CG	N
0.975	24.765	72426S	4.00 101.600	0.765 19.431	19.00 3.325	1.900 48.260	36.000 160.128	1.460 37.08	0.105 2.67	13.90	SST CG	N
0.975	24.765	72439	4.00 101.600	0.751 19.075	29.00 5.075	2.200 35.560	63.000 280.224	1.600 40.64	0.112 2.84	14.30	MW CG	N
0.975	24.765	72439S	4.00 101.600	0.751 19.075	24.00 4.200	1.700 43.180	41.000 182.368	1.600 40.64	0.112 2.84	14.30	SST CG	N
0.975	24.765	72446	4.00 101.600	0.745 18.923	32.00 5.600	2.100 53.340	68.000 302.464	1.650 41.91	0.115 2.92	14.40	MW CG	N
0.975	24.765	72446S	4.00 101.600	0.745 18.923	27.00 4.725	1.600 40.640	45.000 200.160	1.650 41.91	0.115 2.92	14.40	SST CG	N
0.975	24.765	72454	4.00 101.600	0.735 18.669	38.00 6.650	2.000 50.800	77.000 342.496	1.740 44.20	0.120 3.05	14.50	MW CG	N
0.975	24.765	72454S	4.00 101.600	0.735 18.669	32.00 5.600	1.600 40.640	51.000 226.848	1.740 44.20	0.120 3.05	14.50	SST CG	N
0.975	24.765	72466	4.00 101.600	0.725 18.415	37.00 6.475	1.500 38.100	57.000 253.536	1.890 48.01	0.125 3.18	15.10	MW CG	N
0.975	24.765	72474	4.00 101.600	0.705 17.907	58.00 10.150	1.800 45.720	106.000 471.488	2.140 54.36	0.135 3.43	15.90	MW CG	N
0.975	24.765	72474S	4.00 101.600	0.705 17.907	50.00 8.750	1.400 35.560	68.000 302.464	2.140 54.36	0.135 3.43	15.90	SST CG	N
0.975	24.765	72481	4.00 101.600	0.679 17.247	87.00 15.225	1.600 40.640	139.000 618.272	2.370 60.20	0.148 3.76	16.00	MW CG	N
0.975	24.765	72481S	4.00 101.600	0.679 17.247	74.00 12.950	1.200 30.480	89.000 395.872	2.370 60.20	0.148 3.76	16.00	SST CG	N
0.975	24.765	72487	4.00 101.600	0.651 16.535	133.00 23.275	1.300 33.020	176.000 782.848	2.570 65.28	0.162 4.11	15.90	MW CG	N
0.975	24.765	72487S	4.00 101.600	0.651 16.535	113.00 19.775	0.990 25.146	111.000 493.728	2.570 65.28	0.162 4.11	15.90	SST CG	N
0.984	24.994	3336	0.72 18.288	0.794 20.168	111.00 19.425	0.260 6.604	29.000 128.992	0.330 8.38	0.095 2.41	3.50	SPR CG	Z
0.984	24.994	2832	0.81 20.574	0.800 20.320	97.00 16.975	0.380 9.652	36.000 160.128	0.410 10.41	0.092 2.34	3.50	MW C	Z
0.984	24.994	12579	0.81 20.574	0.794 20.168	111.00 19.425	0.260 6.604	29.000 128.992	0.330 8.38	0.095 2.41	3.50	SPR CG	Z
0.984	24.994	S-3104	0.88 22.352	0.904 22.962	1.30 0.228	0.640 16.256	0.810 3.603	0.240 6.10	0.040 1.02	5.00	SST C	N
0.984	24.994	10652	0.94 23.876	0.824 20.930	29.00 5.075	0.480 12.192	14.000 62.272	0.460 11.68	0.080 2.03	4.75	SPR C	GI
0.984	24.994	1659	1.00 25.400	0.860 21.844	11.00 1.925	0.660 16.764	7.100 31.581	0.340 8.64	0.062 1.57	4.50	SPR C	Z
0.984	24.994	11942	1.00 25.400									




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
0.984	24.994	S-1201	1.81	45.974	0.814	20.676	9.00	1.575	0.790	20.066	7.100	31.581	1.020	25.91	0.085	2.16	12.00	SST	CG	N
0.984	24.994	3862	1.88	47.752	0.774	19.660	37.00	6.475	0.930	23.622	34.000	151.232	0.950	24.13	0.105	2.67	9.00	HD	CG	Z
0.984	24.994	12427	2.16	54.864	0.884	22.454	3.30	0.578	1.300	33.020	4.400	19.571	0.300	7.62	0.050	1.27	5.00	SST	C	N
0.984	24.994	S-1590	2.25	57.150	0.906	23.012	0.58	0.102	1.900	48.260	1.100	4.893	0.350	8.89	0.039	0.99	8.00	SST	C	Z
0.984	24.994	10395	2.25	57.150	0.834	21.184	15.00	2.625	0.980	24.892	15.000	66.720	0.530	13.46	0.075	1.91	6.00	SPR	C	Z
0.984	24.994	11673	2.38	60.452	0.686	17.424	187.00	32.725	0.540	13.716	100.000	444.800	1.270	32.26	0.149	3.78	8.50	SPR	CG	Z
0.984	24.994	M-141	2.47	62.738	0.484	12.294	2367.00	414.225	0.160	4.064	385.000	1712.480	2.000	50.80	0.250	6.35	8.00	SPR	CG	Z
0.984	24.994	11752	2.50	63.500	0.824	20.930	10.00	1.750	1.700	43.180	17.000	75.616	0.800	20.32	0.080	2.03	10.00	SPR	CG	Z
0.984	24.994	2622	2.72	69.088	0.600	15.240	562.00	98.350	0.340	8.636	193.000	858.464	1.730	43.94	0.192	4.88	9.00	SPR	CG	Z
0.984	24.994	4371	3.00	76.200	0.814	20.676	12.00	2.100	1.800	45.720	21.000	93.408	0.910	23.11	0.085	2.16	10.80	SPR	CG	Z
0.984	24.994	1807	3.00	76.200	0.774	19.660	22.00	3.850	1.600	40.640	35.000	155.680	1.420	36.07	0.105	2.67	13.50	HD	CG	Z
0.984	24.994	10429	3.50	88.900	0.758	19.253	31.00	5.425	1.500	38.100	46.000	204.608	1.530	38.86	0.113	2.87	13.50	SPR	CG	Z
0.984	24.994	3188	3.63	92.202	0.890	22.606	1.10	0.193	3.100	78.740	3.300	14.678	0.520	13.21	0.047	1.19	10.00	SPR	C	Z
0.984	24.994	10586	3.75	95.250	0.820	20.828	6.00	1.050	2.500	63.500	15.000	66.720	1.230	31.24	0.082	2.08	15.00	SST	CG	N
0.984	24.994	11623	4.00	101.600	0.626	15.900	189.00	33.075	0.880	22.352	166.000	738.368	3.040	77.22	0.179	4.55	17.00	SPR	CG	Z
0.984	24.994	11630	4.00	101.600	0.624	15.850	194.00	33.950	0.830	21.082	161.000	716.128	3.060	77.72	0.180	4.57	17.00	SPR	CG	Z
0.984	24.994	3410	5.00	127.000	0.660	16.764	94.00	16.450	1.300	33.020	124.000	551.552	3.610	91.69	0.162	4.11	22.00	SPR	CG	Z
0.984	24.994	10924	6.94	176.276	0.760	19.304	12.00	2.100	3.500	88.900	41.000	182.368	3.140	79.76	0.112	2.84	28.00	SST	CG	N
0.984	24.994	11998	8.06	204.724	0.564	14.326	246.00	43.050	1.000	25.400	248.000	1103.104	5.570	141.48	0.210	5.33	26.50	SPR	CG	Z
1	25.400	LL-49	0.66	16.764	0.760	19.304	437.00	76.475	0.120	3.048	54.000	240.192	0.360	9.14	0.120	3.05	3.00	SPR	CG	Z
1	25.400	11894	0.78	19.812	0.894	22.708	6.70	1.173	0.520	13.208	3.400	15.123	0.270	6.86	0.053	1.35	4.00	SPR	C	N
1	25.400	10287	0.84	21.336	0.876	22.250	10.00	1.750	0.560	14.224	5.800	25.798	0.280	7.11	0.062	1.57	4.50	SPR	CG	Z
1	25.400	2692	0.88	22.352	0.906	23.012	4.10	0.718	0.640	16.256	2.600	11.565	0.240	6.10	0.047	1.19	4.00	HD	C	Z
1	25.400	B8-41	0.88	22.352	0.858	21.793	10.00	1.750	0.450	11.430	4.500	20.016	0.430	10.92	0.071	1.80	6.00	SST	CG	N
1	25.400	S-1233	0.88	22.352	0.856	21.742	11.00	1.925	0.440	11.176	4.700	20.906	0.430	10.92	0.072	1.83	6.00	SST	CG	N
1	25.400	S-178	0.88	22.352	0.790	20.066	106.00	18.550	0.330	8.382	35.000	155.680	0.420	10.67	0.105	2.67	4.00	SST	CG	N
1	25.400	AA-48	0.94	23.876	0.820	20.828	32.00	5.600	0.440	11.176	14.000	62.272	0.500	12.70	0.090	2.29	5.50	SST	CG	N
1	25.400	4211	1.00	25.400	0.910	23.114	2.70	0.473	0.750	19.050	2.000	8.896	0.250	6.35	0.045	1.14	4.50	SPR	C	Z
1	25.400	S-1360	1.00	25.400	0.880	22.352	9.80	1.715	0.700	17.780	6.800	30.246	0.300	7.62	0.060	1.52	4.00	SST	C	N
1	25.400	11763	1.00	25.400	0.876	22.250	8.60	1.505	0.630	16.002	5.400	24.019	0.370	9.40	0.062	1.57	5.00	SPR	C	Z
1	25.400	12402	1.00	25.400	0.852	21.641	22.00	3.850	0.646	16.41	14.210	63.21	0.410	10.41	0.074	1.88	4.50	SPR	C	N
1	25.400	11534	1.00	25.400	0.840	21.336	23.00	4.025	0.500	12.700	12.000	53.376	0.500	12.70	0.080	2.03	5.25	SPR	CG	Z
1	25.400	11548	1.00	25.400	0.808	20.523	66.00	11.550	0.440	11.176	29.000	128.992	0.530	13.46	0.096	2.44	4.50	SPR	CG	Z
1	25.400	11805	1.00	25.400	0.790	20.066	216.00	37.800	0.160	4.064	35.000	155.680	0.320	8.13	0.105	2.67	3.00	SST	CG	N
1	25.400	27	1.00	25.400	0.730	18.542	268.00	46.900	0.280	7.112	74.000	329.152	0.640	16.26	0.135	3.43	4.75	HD	CG	Z
1	25.400	4341	1.13	28.702	0.804	20.422	52.00	9.100	0.590	14.986	30.000	133.440	0.540	13.72	0.098	2.49	5.50	SPR	CG	Z
1	25.400	S-1599	1.16	29.464	0.852	21.641	19.00	3.325	0.680	17.272	13.000	57.824	0.410	10.41	0.074	1.88	4.50	SST	C	N
1	25.400	3854	1.19	30.226	0.750	19.050	140.00	24.500	0.440	11.176	61.000	271.328	0.720	18.29	0.125	3.18	5.75	SPR	CG	Z
1	25.400	10164	1.25	31.750	0.750	19.050	175.00	30.625	0.350	8.890	61.000	271.328	0.630	16.00	0.125	3.18	5.00	SPR	CG	Z
1	25.400	10251	1.25	31.750	0.750	19.050	190.00	33.250	0.320	8.128	61.000	271.328	0.590	14.99	0.125	3.18	4.75	SPR	CG	Z
1	25.400	Q-82	1.34	34.036	0.814	20.676	29.00	5.075	0.690	17.526	20.000	88.960	0.650	16.51	0.093	2.36	7.00	SPR	CG	N
1	25.400	S-899	1.38	35.052	0.930	23.622	0.52	0.091	1.100	27.940	0.590	2.624	0.250	6.35	0.035	0.89	6.00	SST	C	N
1	25.400	00-90	1.38	35.052	0.892	22.657	6.30	1.103	0.870	22.098	5.400	24.019	0.270	6.86	0.054	1.37	4.00	SST	CG	N
1	25.400	S-53	1.38	35.052	0.840	21.336	17.00	2.975	0.910	23.114	15.000	66.720	0.470	11.94	0.080	2.03	6.00	SST	CG	N
1	25.400	S-1573	1.50	38.100	0.892	22.657	3.70	0.648	1.200	30.480	4.400	19.571	0.300	7.62	0.054	1.37	5.50	SST	CG	N
1	25.400	2864	1.50	38.100	0.790	20.066	54.00	9.450	0.700	17.780	38.000	169.024	0.680	17.27	0.105	2.67	6.50	HD	CG	Z
1	25.400	10969	1.50	38.100	0.646	16.408	595.00	104.125	0.270	6.858	158.000	702.784	1.110	28.19	0.177	4.50	6.25	HD	CG	BO
1	25.400	S-75	1.72	43.688	0.790	20.066	41.00	7.175	0.850	21.590	35.000	155.680	0.760	19.30	0.105	2.67	7.25	SST	CG	N
1	25.400	10791	1.75	44.450	0.930	23.622	0.57	0.100	1.500	38.100	0.860	3.825	0.240	6.10	0.035	0.89	5.75	SST	C	N
1	25.400	12523	1.75	44.450	0.884	22.454	4.90	0.858	1.400	35.560	6.800	30.246	0.350	8.89	0.058	1.47	6.00	SPR	CG	Z
1	25.400	912	1.75	44.450	0.876	22.250	5.70	0.998	1.300	33.020	7.300	32.470	0.470	11.94	0.062	1.57	6.50	MW	C	Z
1	25.400	11812	1.75	44.450	0.868	22.047	7.40	1.295	1.300	33.020	9.800	43.590	0.430	10.92	0.066	1.68	6.50	SPR	CG	Z
1	25.400	11751	1.75	44.450	0.840	21.336	22.00	3.850	0.820	20.828	18.000	80.064	0.440	11.18	0.080					




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish							
1	25.400	B17-184	2.50	63.500	0.800	20.320	28.00	4.900	1.600	40.640	45.000	200.160	0.900	22.86	0.100	2.54	9.00	MW CG	GI
1	25.400	375	2.50	63.500	0.790	20.066	35.00	6.125	1.100	27.940	38.000	169.024	1.050	26.67	0.105	2.67	9.00	HD CG	Z
1	25.400	71	2.50	63.500	0.760	19.304	55.00	9.625	0.990	25.146	54.000	240.192	1.200	30.48	0.120	3.05	10.00	HD CG	Z
1	25.400	S-408	2.59	65.786	0.676	17.170	260.00	45.500	0.420	10.668	109.000	484.832	1.260	32.00	0.162	4.11	7.75	SST CG	N
1	25.400	4311	2.63	66.802	0.704	17.882	131.00	22.925	0.740	18.796	97.000	431.456	1.550	39.37	0.148	3.76	10.50	SPR CG	Z
1	25.400	10964	2.72	69.088	0.750	19.050	62.00	10.850	0.870	22.098	53.000	235.744	1.850	46.99	0.125	3.18	10.50	HD CG	Z
1	25.400	2587	2.75	69.850	0.866	21.996	5.90	1.033	1.800	45.720	11.000	48.928	0.540	13.72	0.067	1.70	8.00	HD CG	Z
1	25.400	12477	2.75	69.850	0.840	21.336	9.50	1.663	1.900	48.260	18.000	80.064	1.800	20.32	0.080	2.03	10.00	SPR CG	Z
1	25.400	4207	2.88	73.152	0.816	20.726	15.00	2.625	1.700	43.180	26.000	115.648	1.010	25.65	0.092	2.34	11.00	SPR CG	Z
1	25.400	10358	2.94	74.676	0.750	19.050	58.00	10.150	1.000	25.400	61.000	271.328	1.380	35.05	0.125	3.18	11.00	SPR CG	Z
1	25.400	EE-56	3.00	76.200	0.880	22.352	2.70	0.473	2.400	60.960	6.300	28.022	0.630	16.00	0.060	1.52	9.50	SST C	N
1	25.400	10741	3.00	76.200	0.876	22.250	2.00	0.350	2.100	53.340	4.100	18.237	0.930	23.62	0.062	1.57	15.00	SPR CG	N
1	25.400	11135	3.00	76.200	0.816	20.726	11.00	1.925	1.700	43.180	19.000	84.512	1.270	32.26	0.092	2.34	14.00	HD CG	Z
1	25.400	3357	3.00	76.200	0.782	19.863	29.00	5.075	1.500	38.100	42.000	186.816	1.310	33.27	0.109	2.77	12.00	SPR CG	Z
1	25.400	57	3.00	76.200	0.760	19.304	45.00	7.875	1.200	30.480	54.000	240.192	1.410	35.81	0.120	3.05	11.80	HD CG	Z
1	25.400	7052	3.00	76.200	0.744	18.898	51.00	8.925	1.200	30.480	60.000	266.880	1.660	42.16	0.128	3.25	12.00	SST C	N
1	25.400	HH-79	3.13	79.502	0.880	22.352	2.20	0.385	2.500	63.500	5.400	24.019	0.660	16.76	0.060	1.52	11.00	SST CG	N
1	25.400	10550	3.19	81.026	0.750	19.050	63.00	11.025	0.960	24.384	61.000	271.328	1.410	35.81	0.125	3.18	10.30	SPR C	Z
1	25.400	S-1491	3.25	82.550	0.922	23.419	0.54	0.095	2.900	73.660	1.600	7.117	0.310	7.87	0.039	0.99	8.00	SST CG	N
1	25.400	S-3204	3.25	82.550	0.922	23.419	0.58	0.102	2.900	73.660	1.700	7.562	0.300	7.62	0.039	0.99	7.75	SST CG	N
1	25.400	S-252	3.38	85.852	0.876	22.250	3.00	0.525	2.773	70.434	8.300	36.918	0.607	15.42	0.063	1.59	9.70	SST CG	N
1	25.400	4106	3.38	85.852	0.810	20.574	19.00	3.325	1.500	38.100	28.000	124.544	1.000	25.40	0.095	2.41	10.50	SPR CG	Z
1	25.400	11555	3.50	88.900	0.906	23.012	1.40	0.245	3.000	76.200	4.100	18.237	0.420	10.67	0.047	1.19	8.00	SPR C	Z
1	25.400	S-1617	3.50	88.900	0.894	22.708	1.30	0.228	2.900	73.660	3.800	16.902	0.580	14.73	0.053	1.35	11.00	SST CG	N
1	25.400	39	3.50	88.900	0.760	19.304	36.00	6.300	1.500	38.100	54.000	240.192	1.710	43.43	0.120	3.05	14.30	HD CG	Z
1	25.400	38	3.50	88.900	0.676	17.170	153.00	26.775	0.800	20.320	123.000	547.104	2.110	53.59	0.162	4.11	13.00	HD CG	Z
1	25.400	2728	3.50	88.900	0.676	17.170	240.00	42.000	0.510	12.954	123.000	547.104	1.460	37.08	0.162	4.11	9.00	SPR CG	Z
1	25.400	3111	3.63	92.202	0.914	23.216	0.93	0.163	3.300	83.820	3.100	13.789	0.340	8.64	0.043	1.09	8.00	SPR CG	Z
1	25.400	2716	3.75	95.250	0.856	21.742	3.90	0.683	2.600	66.040	10.000	44.480	1.120	28.45	0.072	1.83	14.50	SPR C	Z
1	25.400	2968	3.75	95.250	0.790	20.066	27.00	4.725	1.400	35.560	38.000	169.024	1.260	32.00	0.105	2.67	11.00	SPR C	Z
1	25.400	4228	3.75	95.250	0.712	18.085	90.00	15.750	1.000	25.400	89.000	395.872	2.020	51.31	0.144	3.66	13.00	SPR C	Z
1	25.400	4356	3.94	100.076	0.830	21.082	6.50	1.138	2.500	63.500	16.000	71.168	1.450	36.83	0.085	2.16	17.00	SPR CG	Z
1	25.400	10548	4.00	101.600	0.838	21.285	12.00	2.100	1.500	38.100	18.000	80.064	0.690	17.53	0.081	2.06	8.50	SPR CG	Z
1	25.400	10777	4.00	101.600	0.820	20.828	9.80	1.715	2.400	60.960	24.000	106.752	1.330	33.78	0.090	2.29	14.80	SPR CG	N
1	25.400	11615	4.19	106.426	0.820	20.828	9.60	1.680	2.500	63.500	24.000	106.752	1.440	36.58	0.090	2.29	15.00	SPR CG	Z
1	25.400	10248	4.25	107.950	0.812	20.625	16.00	2.800	1.700	43.180	27.000	120.096	1.180	29.97	0.094	2.39	11.50	SPR C	Z
1	25.400	12556	4.45	113.030	0.734	18.644	53.00	9.275	1.272	32.309	67.000	298.016	2.039	51.79	0.135	3.43	14.10	SST C	N
1	25.400	7001	4.50	114.300	0.760	19.304	25.00	4.375	2.100	53.340	53.000	235.744	2.400	60.96	0.120	3.05	19.50	HD CG	Z
1	25.400	656	4.50	114.300	0.646	16.408	153.00	26.775	1.000	25.400	158.000	702.784	3.630	83.06	0.177	4.50	18.50	HD CG	Z
1	25.400	1949	4.69	119.126	0.704	17.882	74.00	12.950	1.300	33.020	97.000	431.456	2.520	64.01	0.148	3.76	17.00	SPR CG	Z
1	25.400	4365	4.75	120.650	0.840	21.336	6.00	1.050	2.900	73.660	18.000	80.064	1.160	29.46	0.080	2.03	14.50	SPR CG	Z
1	25.400	3062	4.81	122.174	0.818	20.777	12.00	2.100	2.100	53.340	25.000	111.200	1.170	29.72	0.091	2.31	13.00	SPR CG	Z
1	25.400	10115	4.88	123.952	0.676	17.170	120.00	21.000	1.000	25.400	123.000	547.104	2.590	65.79	0.162	4.11	16.00	SPR CG	N
1	25.400	333	5.00	127.000	0.646	16.408	137.00	23.975	1.200	30.480	158.000	702.784	3.630	92.20	0.177	4.50	20.50	HD CG	Z
1	25.400	S-3106	5.13	130.302	0.840	21.336	4.70	0.823	3.500	88.900	17.000	75.616	1.280	32.51	0.080	2.03	16.00	SST CG	N
1	25.400	S-270	5.13	130.302	0.820	20.828	7.80	1.365	2.900	73.660	22.000	97.856	1.440	36.58	0.090	2.29	16.00	SST CG	Z
1	25.400	2605	5.25	133.350	0.790	20.066	15.00	2.625	2.500	63.500	38.000	169.024	2.000	50.80	0.105	2.67	18.00	SPR C	Z
1	25.400	12150	5.50	139.700	0.700	17.780	54.00	9.450	1.800	45.720	98.000	435.904	3.600	91.44	0.150	3.81	24.00	SPR CG	Z
1	25.400	848	6.00	152.400	0.676	17.170	74.00	12.950	1.700	43.180	123.000	547.104	4.000	101.60	0.162	4.11	24.70	HD CG	Z
1	25.400	11617	6.50	165.100	0.814	20.676	8.00	1.400	3.300	83.820	26.000	115.648	1.950	49.53	0.093	2.36	20.00	SPR CG	Z
1	25.400	2880	6.88	174.752	0.706	17.932	49.00	8.575	1.900	48.260	95.000	422.560	3.530	89.66	0.147	3.73	24.00	SPR CG	Z
1	25.400	S-1251	7.25	184.150	0.818	20.777	8.20	1.435	2.800	71.120	23.000	102.304	1.460	37.08	0.091	2.31	16.00	SST CG	N
1	25.400	12115	7.50	190.500	0.660	16.764	66.00	11.55											




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
1.01	25.654	72499S	3.50	88.900	0.786	19.964	21.00	3.675	1.900	48.260	40.000	177.920	1.620	41.15	0.112	2.84	14.50	SST	CG	N
1.01	25.654	72501	4.00	101.600	0.786	19.964	22.00	3.850	2.200	55.880	46.000	204.608	1.850	46.99	0.112	2.84	16.50	MW	CG	N
1.01	25.654	72501S	4.00	101.600	0.786	19.964	18.00	3.150	2.200	55.880	40.000	177.920	1.850	46.99	0.112	2.84	16.50	SST	CG	N
1.01	25.654	72503	4.50	114.300	0.786	19.964	19.00	3.325	2.400	60.960	47.000	209.056	2.060	52.32	0.112	2.84	18.40	MW	CG	N
1.01	25.654	72503S	4.50	114.300	0.786	19.964	16.00	2.800	2.400	60.960	40.000	177.920	2.060	52.32	0.112	2.84	18.40	SST	CG	N
1.015	25.781	3882	0.69	17.526	0.775	19.685	416.00	72.800	0.130	3.302	53.000	235.744	0.360	9.14	0.120	3.05	3.00	HD	CG	Z
1.015	25.781	S-896	0.88	22.352	0.829	21.057	40.00	7.000	0.410	10.414	16.000	71.168	0.470	11.94	0.093	2.36	5.00	SST	CG	N
1.015	25.781	12136	1.28	32.512	0.889	22.581	10.00	1.750	0.860	21.844	9.000	40.032	0.350	8.89	0.063	1.60	4.50	SPR	C	Z
1.015	25.781	S-1626	1.38	35.052	0.909	23.089	5.70	0.998	0.900	22.860	5.100	22.685	0.210	5.33	0.053	1.35	4.00	SST	CG	N
1.015	25.781	11694	1.50	38.100	0.891	22.631	4.90	0.858	1.100	27.940	5.200	23.130	0.430	10.92	0.062	1.57	7.00	SPR	CG	Z
1.015	25.781	3390	1.50	38.100	0.825	20.955	30.00	5.250	0.840	21.336	25.000	111.200	0.670	17.02	0.095	2.41	7.00	SPR	CG	Z
1.015	25.781	S-1021	1.63	41.402	0.907	23.038	3.00	0.525	1.300	33.020	3.900	17.347	0.320	8.13	0.054	1.37	6.00	SST	CG	N
1.015	25.781	12059	1.69	42.926	0.591	15.011	1869.00	327.075	0.130	3.302	249.000	1107.552	1.060	26.92	0.212	5.38	5.00	SPR	CG	Z
1.015	25.781	11846	1.72	43.688	0.767	19.482	142.00	24.850	0.382	9.703	54.000	240.192	0.743	18.87	0.125	3.18	4.90	SST	C	N
1.015	25.781	12093	1.81	45.974	0.781	19.837	94.00	16.450	0.473	12.014	44.000	195.712	0.616	15.65	0.116	2.95	5.30	SST	CG	N
1.015	25.781	12547	2.00	50.800	0.745	18.923	143.00	25.025	0.460	11.684	66.000	293.568	0.840	21.34	0.135	3.43	6.25	SST	CG	N
1.015	25.781	S-28	2.00	50.800	0.745	18.923	187.00	32.725	0.350	8.890	66.000	293.568	0.710	18.03	0.135	3.43	5.25	SST	CG	N
1.015	25.781	B12-52	2.13	54.102	0.889	22.581	4.40	0.770	1.600	40.640	7.100	31.581	0.500	12.70	0.063	1.60	8.00	SPR	CG	N
1.015	25.781	S-1426	2.25	57.150	0.805	20.447	34.00	5.950	1.000	25.400	35.000	155.680	0.840	21.34	0.105	2.67	8.00	SST	CG	N
1.015	25.781	10455	2.25	57.150	0.731	18.567	146.00	25.550	0.580	14.732	85.000	378.080	1.140	28.96	0.142	3.61	8.00	SPR	CG	Z
1.015	25.781	12522	2.56	65.024	0.775	19.685	59.00	10.325	0.900	22.860	53.000	235.744	1.080	12.0	0.305	9.00	HD	CG	Z	
1.015	25.781	10301	2.81	71.374	0.641	16.281	344.00	60.200	0.510	12.954	175.000	778.400	2.060	52.32	0.187	4.75	11.00	SPR	CG	Z
1.015	25.781	3367	3.13	79.502	0.899	22.835	3.10	0.543	2.300	58.420	7.000	31.136	0.520	13.21	0.058	1.47	8.00	SPR	C	Z
1.015	25.781	S-420	3.31	84.074	0.901	22.885	2.00	0.350	2.800	71.120	5.400	24.019	0.550	13.97	0.057	1.45	10.00	SST	CG	N
1.015	25.781	S-962	3.50	88.900	0.825	20.955	15.00	2.625	1.700	43.180	26.000	115.648	1.000	25.40	0.095	2.41	10.50	SST	CG	N
1.015	25.781	B17-201	3.59	91.186	0.935	23.749	0.43	0.075	3.100	78.740	1.300	5.782	0.450	11.43	0.040	1.02	10.30	SST	CG	N
1.015	25.781	2810	3.88	98.552	0.887	22.530	5.60	0.980	2.300	58.420	13.000	57.824	0.450	11.43	0.064	1.63	7.00	MW	CG	Z
1.015	25.781	S-1222	4.88	123.952	0.895	22.733	1.20	0.210	3.800	96.520	4.700	20.906	1.080	27.43	0.060	1.52	17.00	SST	C	N
1.015	25.781	1823	4.88	123.952	0.691	17.551	106.00	18.550	1.100	27.940	121.000	538.208	2.750	69.85	0.162	4.11	17.00	HD	CG	Z
1.015	25.781	12456	5.38	136.652	0.763	19.380	37.00	6.475	1.700	43.180	62.000	275.776	2.140	54.36	0.126	3.20	16.00	SPR	C	N
1.015	25.781	2647	7.50	190.500	0.833	21.158	7.20	1.260	4.700	119.380	34.000	151.232	1.750	44.45	0.091	2.31	19.30	MW	CG	Z
1.031	26.187	S-1084	0.63	16.002	0.871	22.123	60.00	10.500	0.270	6.858	16.000	71.168	0.240	6.10	0.080	2.03	3.00	SST	CG	N
1.031	26.187	BB-40	0.75	19.050	0.931	23.647	2.10	0.368	0.450	11.430	0.950	4.226	0.300	7.62	0.050	1.27	6.00	SST	CG	N
1.031	26.187	10107	0.81	20.574	0.907	23.038	12.00	2.100	0.570	14.478	6.600	29.357	0.250	6.35	0.062	1.57	4.00	SPR	CG	Z
1.031	26.187	S-3054	0.88	22.352	0.915	23.241	15.00	2.625	0.430	10.922	6.500	28.912	0.230	5.84	0.058	1.47	3.00	SST	C	N
1.031	26.187	A10-65	1.03	26.162	0.869	22.073	21.00	3.675	0.608	15.443	12.800	56.934	0.422	10.72	0.082	2.08	5.10	SST	CG	N
1.031	26.187	2678	1.13	28.702	0.849	21.565	40.00	7.000	0.580	14.732	23.000	102.304	0.550	13.97	0.091	2.31	5.00	HD	C	Z
1.031	26.187	10740	1.50	38.100	0.929	23.597	5.20	0.910	0.920	23.368	4.700	20.906	0.200	5.08	0.051	1.30	4.00	SPR	CG	Z
1.031	26.187	S-1417	1.50	38.100	0.857	21.768	17.00	2.975	0.800	20.320	14.000	62.272	0.700	17.78	0.087	2.21	7.00	SST	C	N
1.031	26.187	10659	1.53	38.862	0.741	18.821	244.00	42.700	0.360	9.144	89.000	395.872	0.830	21.08	0.145	3.68	5.75	SPR	CG	Z
1.031	26.187	12447	1.56	39.624	0.791	20.091	53.00	9.275	0.420	10.668	22.000	97.856	1.140	28.96	0.120	3.05	9.50	SPR	CG	N
1.031	26.187	10409	1.94	49.276	0.657	16.688	487.00	85.225	0.350	8.890	172.000	765.056	1.500	38.10	0.187	4.75	8.00	SPR	CG	Z
1.031	26.187	10676	1.97	50.038	0.807	20.498	36.00	6.300	0.740	18.796	27.000	120.096	1.230	31.24	0.112	2.84	10.00	SPR	C	Z
1.031	26.187	S-1532	2.00	50.800	0.923	23.444	2.80	0.490	1.700	43.180	4.800	21.350	0.320	8.13	0.054	1.37	6.00	SST	CG	N
1.031	26.187	10457	2.19	55.626	0.707	17.958	224.00	39.200	0.530	13.462	119.000	529.312	1.420	36.07	0.162	4.11	8.75	SPR	CG	Z
1.031	26.187	10722	2.28	57.912	0.747	18.974	145.00	25.375	0.580	14.732	84.000	373.632	1.100	27.94	0.142	3.61	7.75	SPR	CG	Z
1.031	26.187	2730	2.34	59.436	0.911	23.139	5.10	0.893	1.900	48.260	9.800	43.590	0.420	10.67	0.060	1.52	6.00	MW	C	Z
1.031	26.187	2702	2.47	62.738	0.761	19.329	111.00	19.425	0.910	23.114	101.000	449.248	1.080	27.43	0.135	3.43	8.00	MW	CG	Z
1.031	26.187	2677	2.63	66.802	0.871	22.123	12.00	2.100	1.400	35.560	17.000	75.616	0.620	15.75	0.080	2.03	7.75	HD	CG	Z
1.031	26.187	10988	2.81	71.374	0.657	16.688	325.00	56.875	0.530	13.462	172.000	765.056	2.060	52.32	0.187	4.75	11.00	HD	CG	Z
1.031	26.187	S-1473	3.00	72.200	0.871	22.123	4.80	0.840	1.800	45.720	8.800	39.142	1.160	29.46	0.080	2.03	14.50	SST	CG	N
1.031	26.187	3401	3.63	92.202	0.917	23.292	1.50	0.263	2.800	71.120	4.200	18.682	0.800	20.32	0.057	1.45	13.00	SPR	C	Z
1.031																				




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
1.062	26.975	4192	1.00 25.400	0.938 23.825	11.00 1.925	0.690 17.526	7.300 32.470	0.310 7.87	0.062 1.57	4.00	HD	C Z
1.062	26.975	12714	1.03 26.162	0.822 20.879	143.00 25.025	0.360 9.144	51.000 226.848	0.540 13.72	0.120 3.05	4.50	HD	CG BO
1.062	26.975	10516	1.03 26.162	0.792 20.117	199.00 34.825	0.320 8.128	63.000 280.224	0.600 15.24	0.135 3.43	4.50	SST	CG N
1.062	26.975	MM-4	1.38 35.052	0.942 23.927	3.70 0.648	0.960 24.384	3.500 15.568	0.420 10.67	0.060 1.52	7.00	SPR	CG Z
1.062	26.975	10645	1.50 38.100	0.838 21.285	66.00 11.550	0.630 16.002	42.000 186.816	0.670 17.02	0.112 2.84	6.00	SPR	CG Z
1.062	26.975	2854	1.50 38.100	0.822 20.879	114.00 19.950	0.450 11.430	51.000 226.848	0.640 16.26	0.120 3.05	5.25	SPR	CG Z
1.062	26.975	S-3009	1.50 38.100	0.822 20.879	89.00 15.575	0.530 13.462	47.000 209.056	0.660 16.76	0.120 3.05	5.50	SST	CG N
1.062	26.975	3234	1.50 38.100	0.708 17.983	74.00 129.500	0.200 5.080	150.000 667.200	0.840 21.34	0.177 4.50	4.75	SPR	CG Z
1.062	26.975	PP-46	1.50 38.100	0.662 16.815	1197.00 209.475	0.170 4.318	203.000 902.944	1.000 25.40	0.200 5.08	5.00	SPR	CG Z
1.062	26.975	10864	1.56 39.624	1.010 25.654	0.13 0.023	1.400 35.560	0.180 0.801	0.180 4.57	0.026 0.66	6.00	SST	C N
1.062	26.975	11661	1.59 40.386	0.862 21.895	29.00 5.075	0.840 21.336	25.000 111.200	0.750 19.05	0.100 2.54	7.50	SPR	CG Z
1.062	26.975	S-83	1.63 41.402	0.902 22.911	22.00 3.850	0.720 18.288	16.000 71.168	0.360 9.14	0.080 2.03	4.50	SST	CG N
1.062	26.975	10207	1.63 41.402	0.612 15.545	1571.00 274.925	0.170 4.318	273.000 1214.304	1.350 34.29	0.225 5.72	6.00	SPR	CG Z
1.062	26.975	10796	1.75 44.450	0.826 20.980	133.00 23.275	0.370 9.398	49.000 217.952	0.530 13.46	0.118 3.00	4.50	SPR	CG BO
1.062	26.975	3007	1.84 46.736	0.954 24.232	4.00 0.700	1.400 35.560	5.500 24.464	0.320 8.13	0.054 1.37	5.00	SPR	C Z
1.062	26.975	S-3125	1.88 47.752	0.918 23.317	5.80 1.015	1.200 30.480	7.100 31.581	0.650 16.51	0.072 1.83	8.00	SST	C N
1.062	26.975	4388	1.88 47.752	0.910 23.114	13.00 2.275	1.100 27.940	14.000 62.272	0.510 12.95	0.076 1.93	5.75	SPR	C Z
1.062	26.975	MM-44	1.88 47.752	0.882 22.403	21.00 3.675	1.100 27.940	23.000 102.304	0.630 16.00	0.090 2.29	7.00	SPR	CG Z
1.062	26.975	12311	1.94 49.276	0.862 21.895	29.00 5.075	1.100 27.940	31.000 137.888	0.750 19.05	0.100 2.54	7.50	SPR	CG Z
1.062	26.975	S-1385	2.00 50.800	0.880 22.352	17.00 2.975	1.300 33.020	22.000 97.856	0.680 17.27	0.091 2.31	7.50	SST	CG N
1.062	26.975	4352	2.19 55.626	0.892 22.657	16.00 2.800	1.200 30.480	20.000 88.960	0.600 15.24	0.085 2.16	7.00	SPR	CG Z
1.062	26.975	11636	2.25 57.150	0.842 21.387	35.00 6.125	1.100 27.940	40.000 177.920	0.990 25.15	0.110 2.79	9.00	SPR	CG Z
1.062	26.975	CC-44	2.25 57.150	0.742 18.847	190.00 33.250	0.542 13.767	103.000 458.144	1.331 33.81	0.162 4.11	8.20	SST	CG N
1.062	26.975	12520	2.31 58.674	0.812 20.625	71.00 12.425	0.810 20.574	58.000 257.984	1.130 28.70	0.125 3.18	8.00	SPR	C N
1.062	26.975	3133	2.38 60.452	0.922 23.419	9.40 1.645	1.200 30.480	11.000 48.928	0.470 11.94	0.070 1.78	5.75	SPR	C Z
1.062	26.975	3942	2.50 63.500	0.766 19.456	113.00 19.775	0.810 20.574	92.000 409.216	1.480 37.59	0.148 3.76	10.00	SPR	CG Z
1.062	26.975	S-437	3.38 85.852	0.904 22.962	4.70 0.823	2.400 60.960	11.000 48.928	1.020 25.91	0.079 2.01	13.00	SST	CG N
1.062	26.975	3272	3.63 92.202	0.848 21.539	22.00 3.850	1.700 43.180	38.000 169.024	1.280 32.51	0.107 2.72	12.00	SPR	CG Z
1.062	26.975	12436	3.88 98.552	0.938 23.825	2.20 0.385	3.100 78.740	6.900 30.691	0.780 19.81	0.062 1.57	11.50	SPR	C Z
1.062	26.975	S-444	4.63 117.602	0.862 21.895	12.00 2.100	2.500 63.500	29.000 128.992	1.400 35.56	0.100 2.54	14.00	SST	CG N
1.062	26.975	S-3217	5.00 127.000	0.992 25.197	0.15 0.026	4.500 114.300	0.690 3.069	0.510 12.95	0.035 0.89	13.50	SST	C N
1.062	26.975	4108	5.00 127.000	0.822 20.879	27.00 4.725	1.900 48.260	51.000 226.848	1.920 48.77	0.120 3.05	15.00	SPR	C Z
1.062	26.975	334	6.00 152.400	0.708 17.983	96.00 16.800	1.600 40.640	150.000 667.200	4.120 104.65	0.177 4.50	23.30	HD	CG Z
1.062	26.975	2755	7.25 184.150	0.738 18.745	61.00 10.675	1.900 48.260	116.000 515.968	3.940 100.08	0.162 4.11	24.30	SPR	CG Z
1.062	26.975	1936	7.63 193.802	0.880 22.352	6.30 1.103	3.700 93.980	23.000 102.304	1.730 43.94	0.091 2.31	19.00	SPR	CG Z
1.062	26.975	1703	7.63 193.802	0.738 18.745	60.00 10.500	1.900 48.260	116.000 515.968	4.160 105.66	0.162 4.11	24.70	SPR	C Z
1.062	26.975	385	11.50 292.100	0.852 21.641	12.00 2.100	2.900 73.660	36.000 160.128	2.000 50.80	0.105 2.67	18.00	HD	C Z
1.062	26.975	4170	11.50 292.100	0.852 21.641	5.70 0.998	6.300 160.020	36.000 160.128	3.990 101.35	0.105 2.67	37.00	SPR	C Z
1.07	27.178	12804	4.00 101.600	0.656 16.662	315.00 55.125	0.710 18.034	223.000 991.904	3.100 78.74	0.207 5.26	15.00	HD	CG Z
1.078	27.381	11507	0.78 19.812	0.934 23.724	19.00 3.325	0.420 10.668	8.000 35.584	0.360 9.14	0.072 1.83	4.00	SPR	CG Z
1.078	27.381	12074	1.00 25.400	0.918 23.317	30.00 5.250	0.550 13.970	16.000 71.168	0.320 8.13	0.080 2.03	4.00	SPR	CG Z
1.078	27.381	10525	1.00 25.400	0.868 22.047	47.00 8.225	0.370 9.398	18.000 80.064	0.630 16.00	0.105 2.67	6.00	SPR	CG Z
1.078	27.381	11702	1.13 28.702	0.992 25.197	1.30 0.228	0.890 22.606	1.100 4.893	0.240 6.10	0.043 1.09	5.50	SPR	CG Z
1.078	27.381	10685	1.13 28.702	0.908 23.063	27.00 4.725	0.660 16.764	18.000 80.064	0.470 11.94	0.085 2.16	4.50	SST	C N
1.078	27.381	11728	1.13 28.702	0.828 21.031	135.00 23.625	0.420 10.668	57.000 253.536	0.630 16.00	0.125 3.18	5.00	SPR	CG Z
1.078	27.381	12318	1.19 30.226	0.992 25.197	1.30 0.228	0.910 23.114	1.200 5.338	0.280 7.11	0.043 1.09	5.50	SPR	C Z
1.078	27.381	11850	1.34 34.036	0.922 23.419	12.00 2.100	0.880 22.352	10.000 44.480	0.470 11.94	0.078 1.98	6.00	SST	CG N
1.078	27.381	12307	1.47 37.338	0.958 24.333	3.50 0.613	0.990 25.146	3.500 15.568	0.480 12.19	0.060 1.52	7.00	SPR	C Z
1.078	27.381	A13-69	1.47 37.338	0.894 22.708	23.00 4.025	0.900 22.860	21.000 93.408	0.560 14.22	0.092 2.34	6.13	SST	CG N
1.078	27.381	12268	1.50 38.100	0.966 24.536	3.80 0.665	1.200 30.480	4.500 20.016	0.310 7.87	0.056 1.42	5.50	SPR	CG Z
1.078	27.381	1908	1.50 38.100	0.852 21.641	65.00 11.375	0.650 16.510	42.000 186.816	0.680 17.27	0.113 2.87	6.00	SPR	CG Z
1.078	27.381	1739	1.63 41.402	0.782 19.863	229.00 40.075	0.550 13.970	127.000 564.896	0.850 21.59	0.148 3.76	5.75	MW	CG Z
1.078	27.381	1741	1.75 44.450	0.896 22.758	34.00 5.950	0.680 17.272	23.000 102.304	0.550 13.97	0.091 2.31	5.00	HD	C Z
1.078	27.381	11564	1.81 45.974	0.960 24.384	4.70 0.823	1.400 35.560	6.700 29.802	0.380 9.65	0.059 1.50	5.50	SPR	CG Z
1.078	27.381	S-844	1.88 47.752	0.908 23.063	14.00 2.450	1.300 33.020	18.000 80.064	0.580 14.73	0.085 2.16	6.88	SST	CG N
1.078	27.381	S-356	2.00 50.800	0.988 25.095	1.60 0.280	1.700 43.180	2.700 12.010	0.270 6.86	0.045 1.14	5.00	SST	C N
1.078	27.381	11586	2.00 50.800	0.896 22.758	21.00 3.675	1.100 27.940	23.000 102.304	0.730 18.54	0.091 2.31	7.00	SPR	CG Z
1.078	27.381	12156	2.00 50.800	0.808 20.523	104.00 18.200	0.670 17.018	69.000 306.912	1.010 25.65	0.135 3.43	7.50	SPR	CG Z
1.078	27.381	B11-29	2.00 50.800	0.808 20.523	127.00 22.225	0.550 13.970	69.000 306.912	0.880 22.35	0.135 3.43	6.50	SPR	CG N
1.078	27.381	10992	2.00 50.800	0.754 19.152	224.00 39.200	0.510 12.954	115.000 511.520	1.420 36.07	0.162 4.11	7.75	HD	CG Z
1.078	27.381	3121	2.13 54.102	0.934 23.724	9.50 1.663	1.300 33.020	12.000 53.376	0.430 10.92	0.072 1.83	6.00	SPR	C Z
1.078	27.381	11870	2.13 54.102	0.894 22.708	20.00 3.500	1.200 30.480	24.000 106.752	0.690 17.				




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
1.094	27.788	S-1549	0.88 22.352	0.924 23.470	51.00 8.925	0.360 9.144	18.000 80.064	0.280 7.11	0.085 2.16	3.25	SST	CG N
1.094	27.788	S-3088	0.94 23.876	0.924 23.470	42.00 7.350	0.430 10.922	18.000 80.064	0.300 7.62	0.085 2.16	3.50	SST	CG N
1.094	27.788	12149	0.94 23.876	0.910 23.114	41.00 7.175	0.430 10.922	18.000 80.064	0.510 12.95	0.092 2.34	4.50	SPR	CG Z
1.094	27.788	S-130	1.00 25.400	0.884 22.454	79.00 13.825	0.410 10.414	32.000 142.336	0.420 10.67	0.105 2.67	4.00	SST	CG N
1.094	27.788	KK-44	1.06 26.924	0.954 24.232	16.00 2.800	0.680 17.272	11.000 48.928	0.280 7.11	0.070 1.78	4.00	SPR	CG GI
1.094	27.788	3910	1.25 31.750	0.912 23.165	33.00 5.775	0.700 17.780	23.000 102.304	0.460 11.68	0.091 2.31	5.00	SPR	CG GI
1.094	27.788	11741	1.25 31.750	0.904 22.962	39.00 6.825	0.660 16.764	26.000 115.648	0.480 12.19	0.095 2.41	5.00	SPR	CG Z
1.094	27.788	2814	1.38 35.052	0.950 24.130	14.00 2.450	0.820 20.828	12.000 53.376	0.320 8.13	0.072 1.83	4.50	HD	CG Z
1.094	27.788	3034	1.38 35.052	0.944 23.978	16.00 2.800	0.830 21.082	13.000 57.824	0.420 10.67	0.075 1.91	4.67	SPR	C Z
1.094	27.788	12555	1.50 38.100	0.884 22.454	45.00 7.875	0.720 18.288	32.000 142.336	0.580 14.73	0.105 2.67	5.50	SST	CG N
1.094	27.788	12111	1.53 38.862	0.934 23.724	11.00 1.925	0.930 23.622	10.000 44.480	0.600 15.24	0.080 2.03	6.50	SST	C N
1.094	27.788	3132	1.59 40.386	0.894 22.708	33.00 5.775	0.920 23.368	30.000 133.440	0.650 16.51	0.100 2.54	6.50	SPR	CG Z
1.094	27.788	12006	1.59 40.386	0.782 19.863	295.00 51.625	0.340 8.636	102.000 453.696	0.860 21.84	0.156 3.96	5.50	SPR	CG Z
1.094	27.788	1671	1.63 41.402	0.798 20.269	217.00 37.975	0.410 10.414	89.000 395.872	0.850 21.59	0.148 3.76	5.75	SPR	CG Z
1.094	27.788	11278	1.69 42.926	0.782 19.863	258.00 45.150	0.390 9.906	102.000 453.696	0.940 23.88	0.156 3.96	6.00	SPR	CG Z
1.094	27.788	10332	1.88 47.752	0.810 20.574	159.00 27.825	0.500 12.700	79.000 351.392	0.890 22.61	0.142 3.61	6.25	SPR	CG Z
1.094	27.788	945	2.00 50.800	0.974 24.740	3.70 0.648	1.600 40.640	5.800 25.798	0.450 11.43	0.060 1.52	6.50	MW	C Z
1.094	27.788	1577	2.00 50.800	0.884 22.454	34.00 5.950	1.000 25.400	35.000 155.680	0.770 19.56	0.105 2.67	7.33	SPR	CG Z
1.094	27.788	3262	2.00 50.800	0.824 20.930	98.00 17.150	0.690 17.526	68.000 302.464	1.010 25.65	0.135 3.43	7.50	HD	CG Z
1.094	27.788	10325	2.13 54.102	0.810 20.574	135.00 23.625	0.580 14.732	79.000 351.392	0.990 25.15	0.142 3.61	7.00	SPR	CG Z
1.094	27.788	S-1246	2.19 55.626	0.950 24.130	7.90 1.383	1.400 35.560	11.000 48.928	0.430 10.92	0.072 1.83	6.00	SST	C N
1.094	27.788	11284	2.19 55.626	0.798 20.269	172.00 30.100	0.520 13.208	89.000 395.872	1.000 25.40	0.148 3.76	6.75	SPR	CG Z
1.094	27.788	3697	2.25 57.150	1.006 25.552	1.20 0.210	1.900 48.260	2.300 10.230	0.310 7.87	0.044 1.12	6.00	SPR	C Z
1.094	27.788	11971	2.38 60.452	0.914 23.216	14.00 2.450	1.400 35.560	20.000 88.960	0.700 17.78	0.090 2.29	7.75	SST	CG N
1.094	27.788	11381	2.50 63.500	0.944 23.978	7.60 1.330	1.600 40.640	13.000 57.824	0.530 13.46	0.075 1.91	7.00	SST	CG N
1.094	27.788	3309	2.50 63.500	0.814 20.676	91.00 15.925	0.840 21.336	76.000 338.048	1.260 32.00	0.140 3.56	9.00	SPR	CG Z
1.094	27.788	S-448	2.63 66.802	0.872 22.149	32.00 5.600	1.178 29.921	38.000 169.024	0.951 24.16	0.112 2.84	8.50	SST	CG N
1.094	27.788	10381	2.63 66.802	0.868 22.047	31.00 5.425	1.300 33.020	42.000 186.816	1.130 28.70	0.113 2.87	10.00	SPR	CG Z
1.094	27.788	3913	2.75 69.850	1.012 25.705	0.43 0.075	2.300 58.420	1.000 4.448	0.450 11.43	0.041 1.04	10.00	SPR	C Z
1.094	27.788	S-1439	2.75 69.850	0.992 25.197	1.40 0.245	2.300 58.420	3.100 13.789	0.430 10.92	0.051 1.30	7.50	SST	C N
1.094	27.788	3163	2.75 69.850	0.782 19.863	163.00 28.525	0.620 15.748	102.000 453.696	1.330 33.78	0.156 3.96	8.50	SPR	CG Z
1.094	27.788	11388	3.41 86.614	0.844 21.438	38.00 6.650	1.300 33.020	51.000 226.848	1.380 35.05	0.125 3.18	11.00	SST	CG N
1.094	27.788	S-279	3.63 92.202	0.912 23.165	6.30 1.103	2.200 55.880	14.000 62.272	1.410 35.81	0.091 2.31	15.50	SST	CG N
1.094	27.788	3711	4.00 101.600	0.984 24.994	1.20 0.210	3.300 83.820	3.900 17.347	0.720 18.29	0.055 1.40	12.00	SPR	C Z
1.094	27.788	3374	4.00 101.600	0.814 20.676	55.00 9.625	1.400 35.560	76.000 338.048	1.890 48.01	0.140 3.56	13.50	SPR	CG GI
1.094	27.788	12169	4.06 103.124	0.782 19.863	115.00 20.125	0.880 22.352	101.000 449.248	1.720 43.69	0.158 4.01	11.00	SPR	CG GI
1.094	27.788	2713	4.75 120.650	0.894 22.708	11.00 1.925	2.800 71.120	30.000 133.440	1.550 39.37	0.100 2.54	15.50	SPR	CG Z
1.094	27.788	11775	4.91 124.714	0.900 22.860	9.70 1.698	2.600 66.040	25.000 111.200	1.330 33.78	0.097 2.46	13.80	SST	CG N
1.094	27.788	12312	5.00 127.000	0.884 22.454	15.00 2.625	2.300 58.420	35.000 155.680	1.580 40.13	0.105 2.67	14.00	HD	C Z
1.094	27.788	S-3046	5.13 130.302	0.844 21.438	24.00 4.200	2.100 53.340	51.000 226.848	2.000 50.80	0.125 3.18	16.00	SST	CG N
1.094	27.788	4130	5.38 136.652	0.914 23.216	9.30 1.628	2.400 60.960	22.000 97.856	1.080 27.43	0.090 2.29	12.00	SPR	CG Z
1.094	27.788	11709	6.00 152.400	0.910 23.114	7.90 1.383	3.000 76.200	24.000 106.752	1.380 35.05	0.092 2.34	15.00	SPR	CG Z
1.094	27.788	3471	7.50 190.500	0.766 19.456	57.00 9.975	2.000 50.800	117.000 520.416	4.180 106.17	0.164 4.17	24.50	SPR	C Z
1.094	27.788	1643	7.88 200.152	0.884 22.454	7.50 1.313	4.600 116.840	35.000 155.680	2.730 69.34	0.105 2.67	26.00	SPR	CG Z
1.094	27.788	12180	8.19 208.026	0.888 22.555	6.90 1.208	4.700 119.380	33.000 146.784	2.680 68.07	0.103 2.62	26.00	SPR	CG Z
1.094	27.788	361	11.30 287.020	0.740 18.796	46.00 8.050	3.200 81.280	146.000 649.408	7.430 188.72	0.177 4.50	42.00	HD	CG Z
1.1	27.940	72504	0.88 22.352	0.936 23.774	43.00 7.525	0.570 14.478	24.000 106.752	0.290 7.37	0.082 2.08	3.50	MW	CG N
1.1	27.940	72504S	0.88 22.352	0.936 23.774	36.00 6.300	0.450 11.430	16.000 71.168	0.290 7.37	0.082 2.08	3.50	SST	CG N
1.1	27.940	72514	0.88 22.352	0.930 23.622	45.00 7.875	0.570 14.478	26.000 115.648	0.310 7.87	0.085 2.16	3.63	MW	CG N
1.1	27.940	72514S	0.88 22.352	0.930 23.622	38.00 6.650	0.470 11.938	18.000 80.064	0.310 7.87	0.085 2.16	3.63	SST	CG N
1.1	27.940	72527	0.88 22.352	0.914 23.216	65.00 11.375	0.520 13.208	34.000 151.232	0.340 8.64	0.093 2.36	3.63	MW	CG N
1.1	27.940	72527S	0.88 22.352	0.914 23.216	55.00 9.625	0.410 10.414	22.000 97.856	0.340 8.64	0.093 2.36	3.63	SST	CG N
1.1	27.940	72537S	0.88 22.352	0.908 23.063	59.00 10.325	0.407 10.338	24.000 106.752	0.352 8.94	0.095 2.41	3.70	SST	CG N
1.1	27.940	72537	0.88 22.352	0.908 23.063	70.00 12.250	0.520 13.208	36.000 160.128	0.360 9.14	0.096 2.44	3.75	MW	CG N
1.1	27.940	72549	0.88 22.352	0.890 22.606	98.00 17.150	0.470 11.938	46.000 204.608	0.410 10.41	0.105 2.67	3.88	MW	CG N
1.1	27.940	72549S	0.88 22.352	0.890 22.606	83.00 14.525	0.390 9.906	32.000 142.336	0.410 10.41	0.105 2.67	3.88	SST	CG N
1.1	27.940	72560	0.88 22.352	0.876 22.250	126.00 22.050	0.450 11.430	56.000 249.088	0.430 10.92	0.112 2.84	3.88	MW	CG N
1.1	27.940	72560S	0.88 22.352	0.876 22.250	107.00 18.725	0.350 8.890	37.000 164.576	0.430 10.92	0.112 2.84	3.88	SST	CG N
1.1	27.940	72582	0.88 22.352	0.850 21.590	194.00 33.950	0.380 9.652	74.000 329.152	0.500 12.70	0.125 3.18	4.00	MW	CG N
1.1	27.940	72582S	0.88 22.352	0.850 21.590	165.00 28.875	0.310 7.874	51.000 226.848	0.500 12.70	0.125 3.18	4.00	SST	CG N
1.1	27.940	72505	1.00 25.400	0.936 23.774	36.00 6.300	0.670 17.018	24.000 106.752	0.310 7.87	0.082 2.08	3.75	MW	CG N
1.1	27.940	72505S	1.00 25.400	0.936 23.774	31.00 5.425	0.530 13.462	16.000 7					




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
1.1	27.940	72529	1.25	31.750	0.914	23.216	43.00	7.525	0.790	20.066	34.000	151.232	0.420	10.67	0.093	2.36	4.50	MW CG N
1.1	27.940	72529S	1.25	31.750	0.914	23.216	36.00	6.300	0.620	15.748	22.000	97.856	0.420	10.67	0.093	2.36	4.50	SST CG N
1.1	27.940	72539S	1.25	31.750	0.908	23.063	38.00	6.650	0.633	16.078	24.000	106.752	0.441	11.20	0.095	2.41	4.60	SST CG N
1.1	27.940	72539	1.25	31.750	0.908	23.063	45.00	7.875	0.810	20.574	36.000	160.128	0.440	11.18	0.096	2.44	4.63	MW CG N
1.1	27.940	72551	1.25	31.750	0.890	22.606	62.00	10.850	0.740	18.796	46.000	204.608	0.510	12.95	0.105	2.67	4.88	MW CG N
1.1	27.940	72551S	1.25	31.750	0.890	22.606	53.00	9.275	0.600	15.240	32.000	142.336	0.510	12.95	0.105	2.67	4.88	SST CG N
1.1	27.940	72562	1.25	31.750	0.876	22.250	80.00	14.000	0.690	17.526	55.000	244.640	0.560	14.22	0.112	2.84	5.00	MW CG N
1.1	27.940	72562S	1.25	31.750	0.876	22.250	68.00	11.900	0.550	13.970	37.000	164.576	0.560	14.22	0.112	2.84	5.00	SST CG N
1.1	27.940	72584	1.25	31.750	0.850	21.590	122.00	21.350	0.610	15.494	75.000	333.600	0.640	16.26	0.125	3.18	5.13	MW CG N
1.1	27.940	72584S	1.25	31.750	0.850	21.590	104.00	18.200	0.490	12.446	51.000	226.848	0.640	16.26	0.125	3.18	5.13	SST CG N
1.1	27.940	72507	1.50	38.100	0.936	23.774	23.00	4.025	1.100	27.940	24.000	106.752	0.390	9.91	0.082	2.08	4.75	MW CG N
1.1	27.940	72507S	1.50	38.100	0.936	23.774	19.00	3.325	0.840	21.336	16.000	71.168	0.390	9.91	0.082	2.08	4.75	SST CG N
1.1	27.940	72517	1.50	38.100	0.930	23.622	24.00	4.200	1.100	27.940	26.000	115.648	0.430	10.92	0.085	2.16	5.00	MW CG N
1.1	27.940	72517S	1.50	38.100	0.930	23.622	20.00	3.500	0.890	22.606	18.000	80.064	0.430	10.92	0.085	2.16	5.00	SST CG N
1.1	27.940	72530	1.50	38.100	0.914	23.216	34.00	5.950	0.980	24.892	34.000	151.232	0.480	12.19	0.093	2.36	5.13	MW CG N
1.1	27.940	72530S	1.50	38.100	0.914	23.216	29.00	5.075	0.770	19.558	22.000	97.856	0.480	12.19	0.093	2.36	5.13	SST CG N
1.1	27.940	72540S	1.50	38.100	0.908	23.063	31.00	5.425	0.775	19.685	24.000	106.752	0.497	12.62	0.095	2.41	5.20	SST CG N
1.1	27.940	72540	1.50	38.100	0.908	23.063	37.00	6.475	1.000	25.400	36.000	160.128	0.500	12.70	0.096	2.44	5.25	MW CG N
1.1	27.940	72552	1.50	38.100	0.890	22.606	50.00	8.750	0.920	23.368	46.000	204.608	0.580	14.73	0.105	2.67	5.50	MW CG N
1.1	27.940	72552S	1.50	38.100	0.890	22.606	43.00	7.525	0.750	19.050	32.000	142.336	0.580	14.73	0.105	2.67	5.50	SST CG N
1.1	27.940	72563	1.50	38.100	0.876	22.250	68.00	11.900	0.840	21.336	56.000	249.088	0.620	15.75	0.112	2.84	5.50	MW CG N
1.1	27.940	72563S	1.50	38.100	0.876	22.250	57.00	9.975	0.640	16.256	37.000	164.576	0.620	15.75	0.112	2.84	5.50	SST CG N
1.1	27.940	72573	1.50	38.100	0.860	21.844	93.00	16.275	0.750	19.050	69.000	306.912	0.650	16.51	0.120	3.05	5.38	MW CG N
1.1	27.940	72573S	1.50	38.100	0.860	21.844	79.00	13.825	0.570	14.478	45.000	200.160	0.650	16.51	0.120	3.05	5.38	SST CG N
1.1	27.940	72585	1.50	38.100	0.850	21.590	105.00	18.375	0.740	18.796	78.000	346.944	0.700	17.78	0.125	3.18	5.63	MW CG N
1.1	27.940	72585S	1.50	38.100	0.850	21.590	89.00	15.575	0.570	14.478	51.000	226.848	0.700	17.78	0.125	3.18	5.63	SST CG N
1.1	27.940	72594	1.50	38.100	0.830	21.082	137.00	23.975	0.690	17.526	95.000	422.560	0.790	20.07	0.135	3.43	5.88	MW CG N
1.1	27.940	72594S	1.50	38.100	0.830	21.082	116.00	20.300	0.530	13.462	61.000	271.328	0.790	20.07	0.135	3.43	5.88	SST CG N
1.1	27.940	72508	1.75	44.450	0.936	23.774	19.00	3.325	1.300	33.020	24.000	106.752	0.430	10.92	0.082	2.08	5.25	MW CG N
1.1	27.940	72508S	1.75	44.450	0.936	23.774	16.00	2.800	1.000	25.400	16.000	71.168	0.430	10.92	0.082	2.08	5.25	SST CG N
1.1	27.940	72519	1.75	44.450	0.930	23.622	21.00	3.675	1.300	33.020	27.000	120.096	0.470	11.94	0.085	2.16	5.50	MW CG N
1.1	27.940	72519S	1.75	44.450	0.930	23.622	18.00	3.150	1.000	25.400	18.000	80.064	0.470	11.94	0.085	2.16	5.50	SST CG N
1.1	27.940	72531	1.75	44.450	0.914	23.216	29.00	5.075	1.200	30.480	34.000	151.232	0.520	13.21	0.093	2.36	5.63	MW CG N
1.1	27.940	72531S	1.75	44.450	0.914	23.216	25.00	4.375	0.910	23.114	22.000	97.856	0.520	13.21	0.093	2.36	5.63	SST CG N
1.1	27.940	72542S	1.75	44.450	0.908	23.063	26.00	4.550	0.924	23.470	24.000	106.752	0.557	14.15	0.095	2.41	5.90	SST CG N
1.1	27.940	72542	1.75	44.450	0.908	23.063	31.00	5.425	1.200	30.480	36.000	160.128	0.580	14.73	0.096	2.44	6.00	MW CG N
1.1	27.940	72553	1.75	44.450	0.890	22.606	42.00	7.350	1.100	27.940	46.000	204.608	0.660	16.76	0.105	2.67	6.25	MW CG N
1.1	27.940	72553S	1.75	44.450	0.890	22.606	36.00	6.300	0.900	22.860	32.000	142.336	0.660	16.76	0.105	2.67	6.25	SST CG N
1.1	27.940	72564	1.75	44.450	0.876	22.250	56.00	9.800	1.000	25.400	56.000	249.088	0.690	17.53	0.112	2.84	6.13	MW CG N
1.1	27.940	72564S	1.75	44.450	0.876	22.250	48.00	8.400	0.770	19.558	37.000	164.576	0.690	17.53	0.112	2.84	6.13	SST CG N
1.1	27.940	72574	1.75	44.450	0.860	21.844	77.00	13.475	0.900	22.860	69.000	306.912	0.740	18.80	0.120	3.05	6.13	MW CG N
1.1	27.940	72574S	1.75	44.450	0.860	21.844	66.00	11.550	0.690	17.526	45.000	200.160	0.740	18.80	0.120	3.05	6.13	SST CG N
1.1	27.940	72586	1.75	44.450	0.850	21.590	86.00	15.050	0.900	22.860	78.000	346.944	0.800	20.32	0.125	3.18	6.38	MW CG N
1.1	27.940	72586S	1.75	44.450	0.850	21.590	73.00	12.775	0.690	17.526	51.000	226.848	0.800	20.32	0.125	3.18	6.38	SST CG N
1.1	27.940	72596	1.75	44.450	0.830	21.082	113.00	19.775	0.840	21.336	95.000	422.560	0.890	22.61	0.135	3.43	6.63	MW CG N
1.1	27.940	72596S	1.75	44.450	0.830	21.082	96.00	16.800	0.630	16.002	61.000	271.328	0.890	22.61	0.135	3.43	6.63	SST CG N
1.1	27.940	72605	1.75	44.450	0.816	20.726	150.00	26.250	0.730	18.542	110.000	489.280	0.910	23.11	0.142	3.61	6.38	MW CG N
1.1	27.940	72605S	1.75	44.450	0.816	20.726	128.00	22.400	0.560	14.224	71.000	315.808	0.910	23.11	0.142	3.61	6.38	SST CG N
1.1	27.940	72617	1.75	44.450	0.804	20.422	175.00	30.625	0.710	18.034	124.000	551.552	0.980	24.89	0.148	3.76	6.63	MW CG N
1.1	27.940	72617S	1.75	44.450	0.804	20.422	149.00	26.075	0.540	13.716	80.000	355.840	0.980	24.89	0.148	3.76	6.63	SST CG N
1.1	27.940	72509	2.00	50.800	0.936	23.774	17.00	2.975	1.500	38.100	24.000	106.752	0.470	11.94	0.082	2.08	5.75	MW CG N
1.1	27.940	72509S	2.00	50.800	0.936	23.774	14.00	2.450	1.200	30.480	16.000	71.168	0.470	11.94	0.082	2.08	5.75	SST CG N
1.1	27.940	72520	2.00	50.800	0.930	23.622	17.00	2.975	1.500	38.100	26.000	115.648	0.520	13.21	0.085	2.16	6.13	MW CG N
1.1	27.940	72520S	2.00	50.800	0.930	23.622	15.00	2.625	1.200	30.480	18.000	80.064	0.520	13.21	0.085	2.16	6.13	SST CG N
1.1	27.940	72532	2.00	50.800	0.914	23.216	25.00	4.375	1.400	35.560	34.000	151.232</td						




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
1.1	27.940	72598	2.25 57.150	0.830 21.082	88.00 15.400	1.100 27.940	95.000 422.560	1.080 27.43	0.135 3.43	8.00	MW	CG N
1.1	27.940	72598S	2.25 57.150	0.830 21.082	75.00 13.125	0.820 20.828	61.000 271.328	1.080 27.43	0.135 3.43	8.00	SST	CG N
1.1	27.940	72608	2.25 57.150	0.816 20.726	111.00 19.425	0.990 25.146	110.000 489.280	1.140 28.96	0.142 3.61	8.00	MW	CG N
1.1	27.940	72608S	2.25 57.150	0.816 20.726	94.00 16.450	0.750 19.050	71.000 315.808	1.140 28.96	0.142 3.61	8.00	SST	CG N
1.1	27.940	72619	2.25 57.150	0.804 20.422	130.00 22.750	0.960 24.384	124.000 551.552	1.200 30.48	0.148 3.76	8.13	MW	CG N
1.1	27.940	72619S	2.25 57.150	0.804 20.422	111.00 19.425	0.720 18.288	80.000 355.840	1.200 30.48	0.148 3.76	8.13	SST	CG N
1.1	27.940	72510	2.50 63.500	0.936 23.774	13.00 2.275	1.900 48.260	24.000 106.752	0.550 13.97	0.082 2.08	6.75	MW	CG N
1.1	27.940	72510S	2.50 63.500	0.936 23.774	11.00 1.925	1.500 38.100	16.000 71.168	0.550 13.97	0.082 2.08	6.75	SST	CG N
1.1	27.940	72521	2.50 63.500	0.930 23.622	14.00 2.450	1.900 48.260	26.000 115.648	0.620 15.75	0.085 2.16	7.25	MW	CG N
1.1	27.940	72521S	2.50 63.500	0.930 23.622	12.00 2.100	1.500 38.100	18.000 80.064	0.620 15.75	0.085 2.16	7.25	SST	CG N
1.1	27.940	72533	2.50 63.500	0.914 23.216	20.00 3.500	1.700 43.180	34.000 151.232	0.690 17.53	0.093 2.36	7.38	MW	CG N
1.1	27.940	72533S	2.50 63.500	0.914 23.216	17.00 2.975	1.400 35.560	22.000 97.856	0.690 17.53	0.093 2.36	7.38	SST	CG N
1.1	27.940	72544S	2.50 63.500	0.908 23.063	18.00 3.150	1.335 33.909	24.000 106.752	0.719 18.26	0.095 2.41	7.60	SST	CG N
1.1	27.940	72544	2.50 63.500	0.908 23.063	21.00 3.675	1.700 43.180	36.000 160.128	0.760 19.30	0.096 2.44	7.88	MW	CG N
1.1	27.940	72555	2.50 63.500	0.890 22.606	28.00 4.900	1.600 40.640	46.000 204.608	0.870 22.10	0.105 2.67	8.25	MW	CG N
1.1	27.940	72555S	2.50 63.500	0.890 22.606	24.00 4.200	1.300 33.020	32.000 142.336	0.870 22.10	0.105 2.67	8.25	SST	CG N
1.1	27.940	72567	2.50 63.500	0.876 22.250	38.00 6.650	1.500 38.100	56.000 249.088	0.920 23.37	0.112 2.84	8.25	MW	CG N
1.1	27.940	72567S	2.50 63.500	0.876 22.250	32.00 5.600	1.100 27.940	37.000 164.576	0.920 23.37	0.112 2.84	8.25	SST	CG N
1.1	27.940	72577	2.50 63.500	0.860 21.844	52.00 9.100	1.300 33.020	69.000 306.912	0.980 24.89	0.120 3.05	8.13	MW	CG N
1.1	27.940	72577S	2.50 63.500	0.860 21.844	44.00 7.700	1.000 25.400	45.000 200.160	0.980 24.89	0.120 3.05	8.13	SST	CG N
1.1	27.940	72589	2.50 63.500	0.850 21.590	58.00 10.150	1.400 35.560	78.000 346.944	1.080 27.43	0.125 3.18	8.63	MW	CG N
1.1	27.940	72589S	2.50 63.500	0.850 21.590	49.00 8.575	1.000 25.400	51.000 226.848	1.080 27.43	0.125 3.18	8.63	SST	CG N
1.1	27.940	72599	2.50 63.500	0.830 21.082	76.00 13.300	1.300 33.020	95.000 422.560	1.220 30.99	0.135 3.43	9.00	MW	CG N
1.1	27.940	72599S	2.50 63.500	0.830 21.082	65.00 11.375	0.950 24.130	61.000 271.328	1.220 30.99	0.135 3.43	9.00	SST	CG N
1.1	27.940	72609	2.50 63.500	0.816 20.726	98.00 17.150	1.100 27.940	110.000 489.280	1.240 31.50	0.142 3.61	8.75	MW	CG N
1.1	27.940	72609S	2.50 63.500	0.816 20.726	83.00 14.525	0.850 21.590	71.000 315.808	1.240 31.50	0.142 3.61	8.75	SST	CG N
1.1	27.940	72620	2.50 63.500	0.804 20.422	115.00 20.125	1.100 27.940	124.000 551.552	1.310 33.27	0.148 3.76	8.88	MW	CG N
1.1	27.940	72620S	2.50 63.500	0.804 20.422	98.00 17.150	0.820 20.828	80.000 355.840	1.310 33.27	0.148 3.76	8.88	SST	CG N
1.1	27.940	72610	2.75 69.850	0.816 20.726	88.00 15.400	1.300 33.020	110.000 489.280	1.350 34.29	0.142 3.61	9.50	MW	CG N
1.1	27.940	72610S	2.75 69.850	0.816 20.726	75.00 13.125	0.950 24.130	71.000 315.808	1.350 34.29	0.142 3.61	9.50	SST	CG N
1.1	27.940	72621	2.75 69.850	0.804 20.422	104.00 18.200	1.200 30.480	124.000 551.552	1.440 36.58	0.148 3.76	9.75	MW	CG N
1.1	27.940	72621S	2.75 69.850	0.804 20.422	88.00 15.400	0.910 23.114	80.000 355.840	1.440 36.58	0.148 3.76	9.75	SST	CG N
1.1	27.940	72511	3.00 76.200	0.936 23.774	11.00 1.925	2.300 58.420	24.000 106.752	0.640 16.26	0.082 2.08	7.75	MW	CG N
1.1	27.940	72511S	3.00 76.200	0.936 23.774	9.10 1.593	1.800 45.720	16.000 71.168	0.640 16.26	0.082 2.08	7.75	SST	CG N
1.1	27.940	72522	3.00 76.200	0.930 23.622	11.00 1.925	2.300 58.420	26.000 115.648	0.710 18.03	0.085 2.16	8.38	MW	CG N
1.1	27.940	72522S	3.00 76.200	0.930 23.622	9.50 1.663	1.900 48.260	18.000 80.064	0.710 18.03	0.085 2.16	8.38	SST	CG N
1.1	27.940	72534	3.00 76.200	0.914 23.216	16.00 2.800	2.100 53.340	34.000 151.232	0.800 20.32	0.093 2.36	8.63	MW	CG N
1.1	27.940	72534S	3.00 76.200	0.914 23.216	14.00 2.450	1.600 40.640	22.000 97.856	0.800 20.32	0.093 2.36	8.63	SST	CG N
1.1	27.940	72545	3.00 76.200	0.908 23.063	14.00 2.450	1.717 43.612	24.000 106.752	0.871 22.12	0.095 2.41	9.20	SST	CG N
1.1	27.940	72545S	3.00 76.200	0.908 23.063	17.00 2.975	2.100 53.340	36.000 160.128	0.880 22.35	0.096 2.44	9.13	MW	CG N
1.1	27.940	72556	3.00 76.200	0.890 22.606	23.00 4.025	2.000 50.800	46.000 204.608	1.010 25.65	0.105 2.67	9.63	MW	CG N
1.1	27.940	72556S	3.00 76.200	0.890 22.606	20.00 3.500	1.600 40.640	32.000 142.336	1.010 25.65	0.105 2.67	9.63	SST	CG N
1.1	27.940	72568	3.00 76.200	0.876 22.250	31.00 5.425	1.800 45.720	56.000 249.088	1.060 26.92	0.112 2.84	9.50	MW	CG N
1.1	27.940	72568S	3.00 76.200	0.876 22.250	26.00 4.550	1.400 35.560	37.000 164.576	1.060 26.92	0.112 2.84	9.50	SST	CG N
1.1	27.940	72578	3.00 76.200	0.860 21.844	42.00 7.350	1.600 40.640	69.000 306.912	1.140 28.96	0.120 3.05	9.50	MW	CG N
1.1	27.940	72578S	3.00 76.200	0.860 21.844	36.00 6.300	1.300 33.020	45.000 200.160	1.140 28.96	0.120 3.05	9.50	SST	CG N
1.1	27.940	72590	3.00 76.200	0.850 21.590	47.00 8.225	1.700 43.180	78.000 346.944	1.250 31.75	0.125 3.18	10.00	MW	CG N
1.1	27.940	72590S	3.00 76.200	0.850 21.590	40.00 7.000	1.300 33.020	51.000 226.848	1.250 31.75	0.125 3.18	10.00	SST	CG N
1.1	27.940	72600	3.00 76.200	0.830 21.082	62.00 10.850	1.500 38.100	95.000 422.560	1.420 36.07	0.135 3.43	10.50	MW	CG N
1.1	27.940	72600S	3.00 76.200	0.830 21.082	53.00 9.275	1.200 30.480	61.000 271.328	1.420 36.07	0.135 3.43	10.50	SST	CG N
1.1	27.940	72611	3.00 76.200	0.816 20.726	80.00 14.000	1.400 35.560	110.000 489.280	1.460 37.08	0.142 3.61	10.30	MW	CG N
1.1	27.940	72611S	3.00 76.200	0.816 20.726	68.00 11.900	1.000 25.400	71.000 315.808	1.460 37.08	0.142 3.61	10.30	SST	CG N
1.1	27.940	72622	3.00 76.200	0.804 20.422	94.00 16.450	1.300 33.020	124.000 551.552	1.550 39.37	0.148 3.76	10.50	MW	CG N
1.1	27.940	72622S	3.00 76.200	0.804 20.422	80.00 14.000	1.000 25.400	80.000 355.840	1.550 39.37	0.148 3.76	10.50	SST	CG N
1.1	27.940	72612	3.31 84.074	0.816 20.726	64.00 11.200	1.600 40.640	99.000 440.352	1.760 44.70	0.142 3.61	12.40	MW	CG N
1.1	27.940	72612S	3.31 84.074	0.816 20.726	54.00 9.450	1.300 33.020	71.000 315.808	1.760 44.70	0.142 3.61	12.40	SST	CG N
1.1	27.940	72512	3.50 88.900	0.936 23.774	9.10 1.593	2.700 68.580	24.000 106.752	0.720 18.29	0.082 2.08	8.75	MW	CG N
1.1	27.940	72512S	3.50 88.900	0.936 23.774	7.70 1.348	2.100 53.340	16.000 71.168	0.720 18.29	0.082 2.08	8.75	SST	CG N
1.1	27.940	72523	3.50 88.900	0.930 23.622	9.60 1.680	2.700 68.580	26.000 115.648	0.810 20.57	0.085 2.16	9.50	MW	CG N
1.1	27.940	72523S	3.50 88.900	0.930 23.622	8.20 1.435	2.200 55.880	18.000 80.064	0.810 20.57	0.085 2.16	9.50	SST	CG N
1.1	27.940	72535	3.50 88.900	0.914 23.216	14.00 2.450	2.500 63.500	34.000 151.232	0.910 23.11	0.093 2.36	9.75	MW	CG N
1.1	27.940	72535S	3.50 88.900	0.914 23.216	12.00 2.100	1.900 48.260	22.000 97.856	0.910 23.11	0.093 2.36	9.		




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
1.1	27.940	72524	4.00 101.600	0.930 23.622	8.30 1.453	3.100 78.740	26.000 115.648	0.900 22.86	0.085 2.16	10.60	MW CG	N
1.1	27.940	72524S	4.00 101.600	0.930 23.622	7.10 1.243	2.600 66.040	18.000 80.064	0.900 22.86	0.085 2.16	10.60	SST CG	N
1.1	27.940	72536	4.00 101.600	0.914 23.216	12.00 2.100	2.900 73.660	34.000 151.232	1.010 25.65	0.093 2.36	10.90	MW CG	N
1.1	27.940	72536S	4.00 101.600	0.914 23.216	10.00 1.750	2.200 55.880	22.000 97.856	1.010 25.65	0.093 2.36	10.90	SST CG	N
1.1	27.940	72547S	4.00 101.600	0.908 23.063	11.00 1.925	2.185 55.499	24.000 106.752	1.056 26.82	0.095 2.41	11.10	SST CG	N
1.1	27.940	72547	4.00 101.600	0.908 23.063	13.00 2.275	2.900 73.660	36.000 160.128	1.120 28.45	0.096 2.44	11.60	MW CG	N
1.1	27.940	72558	4.00 101.600	0.890 22.606	17.00 2.975	2.700 68.580	46.000 204.608	1.300 33.02	0.105 2.67	12.40	MW CG	N
1.1	27.940	72558S	4.00 101.600	0.890 22.606	15.00 2.625	2.200 55.880	32.000 142.336	1.300 33.02	0.105 2.67	12.40	SST CG	N
1.1	27.940	72570	4.00 101.600	0.876 22.250	23.00 4.025	2.500 63.500	56.000 249.088	1.370 34.80	0.112 2.84	12.30	MW CG	N
1.1	27.940	72570S	4.00 101.600	0.876 22.250	19.00 3.325	1.900 48.260	37.000 164.576	1.370 34.80	0.112 2.84	12.30	SST CG	N
1.1	27.940	72580	4.00 101.600	0.860 21.844	31.00 5.425	2.200 55.880	69.000 306.912	1.470 37.34	0.120 3.05	12.30	MW CG	N
1.1	27.940	72580S	4.00 101.600	0.860 21.844	26.00 4.550	1.700 43.180	45.000 200.160	1.470 37.34	0.120 3.05	12.30	SST CG	N
1.1	27.940	72592	4.00 101.600	0.850 21.590	34.00 5.950	2.300 58.420	78.000 346.944	1.630 41.40	0.125 3.18	13.00	MW CG	N
1.1	27.940	72592S	4.00 101.600	0.850 21.590	29.00 5.075	1.700 43.180	51.000 226.848	1.630 41.40	0.125 3.18	13.00	SST CG	N
1.1	27.940	72602	4.00 101.600	0.830 21.082	45.00 7.875	2.100 53.340	95.000 422.560	1.860 47.24	0.135 3.43	13.80	MW CG	N
1.1	27.940	72602S	4.00 101.600	0.830 21.082	38.00 6.650	1.600 40.640	61.000 271.328	1.860 47.24	0.135 3.43	13.80	SST CG	N
1.1	27.940	72614	4.00 101.600	0.816 20.726	59.00 10.325	1.900 48.260	110.000 489.280	1.880 47.75	0.142 3.61	13.30	MW CG	N
1.1	27.940	72614S	4.00 101.600	0.816 20.726	50.00 8.750	1.400 35.560	71.000 315.808	1.880 47.75	0.142 3.61	13.30	SST CG	N
1.1	27.940	72624	4.00 101.600	0.804 20.422	69.00 12.075	1.800 45.720	124.000 551.552	2.020 51.31	0.148 3.76	13.60	MW CG	N
1.1	27.940	72624S	4.00 101.600	0.804 20.422	58.00 10.150	1.400 35.560	80.000 355.840	2.020 51.31	0.148 3.76	13.60	SST CG	N
1.1	27.940	72525	4.50 114.300	0.930 23.622	7.30 1.278	3.500 88.900	25.000 111.200	1.010 25.65	0.085 2.16	11.90	MW CG	N
1.1	27.940	72525S	4.50 114.300	0.930 23.622	6.20 1.085	2.900 73.660	18.000 80.064	1.010 25.65	0.085 2.16	11.90	SST CG	N
1.1	27.940	72548S	4.50 114.300	0.908 23.063	9.40 1.645	2.557 64.948	24.000 106.752	1.204 30.58	0.095 2.41	12.70	SST CG	N
1.1	27.940	72548	4.50 114.300	0.908 23.063	11.00 1.925	3.300 83.820	36.000 160.128	1.240 31.50	0.096 2.44	12.90	MW CG	N
1.1	27.940	72559	4.50 114.300	0.890 22.606	15.00 2.625	3.100 78.740	46.000 204.608	1.440 36.58	0.105 2.67	13.80	SST CG	N
1.1	27.940	72559S	4.50 114.300	0.890 22.606	13.00 2.275	2.500 63.500	32.000 142.336	1.440 36.58	0.105 2.67	13.80	SST CG	N
1.1	27.940	72571	4.50 114.300	0.876 22.250	20.00 3.500	2.800 71.120	56.000 249.088	1.530 38.86	0.112 2.84	13.60	MW CG	N
1.1	27.940	72571S	4.50 114.300	0.876 22.250	17.00 2.975	2.200 55.880	37.000 164.576	1.530 38.86	0.112 2.84	13.60	SST CG	N
1.1	27.940	72581	4.50 114.300	0.860 21.844	27.00 4.725	2.500 63.500	69.000 306.912	1.640 41.66	0.120 3.05	13.60	MW CG	N
1.1	27.940	72581S	4.50 114.300	0.860 21.844	23.00 4.025	1.900 48.260	45.000 200.160	1.640 41.66	0.120 3.05	13.60	SST CG	N
1.1	27.940	72593	4.50 114.300	0.850 21.590	30.00 5.250	2.600 66.040	78.000 346.944	1.810 45.97	0.125 3.18	14.50	MW CG	N
1.1	27.940	72593S	4.50 114.300	0.850 21.590	26.00 4.550	2.000 50.800	51.000 226.848	1.810 45.97	0.125 3.18	14.50	SST CG	N
1.1	27.940	72603	4.50 114.300	0.830 21.082	39.00 6.825	2.400 60.960	95.000 422.560	2.090 53.09	0.135 3.43	15.50	MW CG	N
1.1	27.940	72603S	4.50 114.300	0.830 21.082	34.00 5.950	1.800 45.720	61.000 271.328	2.090 53.09	0.135 3.43	15.50	SST CG	N
1.1	27.940	72615	4.50 114.300	0.816 20.726	51.00 7.895	2.200 55.880	110.000 489.280	2.130 54.10	0.142 3.61	15.00	MW CG	N
1.1	27.940	72615S	4.50 114.300	0.816 20.726	43.00 7.525	1.600 40.640	71.000 315.808	2.130 54.10	0.142 3.61	15.00	SST CG	N
1.1	27.940	72625	4.50 114.300	0.804 20.422	61.00 10.675	2.100 53.340	124.000 551.552	2.260 57.40	0.148 3.76	15.30	MW CG	N
1.1	27.940	72625S	4.50 114.300	0.804 20.422	51.00 8.925	1.600 40.640	80.000 355.840	2.260 57.40	0.148 3.76	15.30	SST CG	N
1.1	27.940	72526	5.00 127.000	0.930 23.622	6.60 1.155	3.900 99.060	26.000 115.648	1.090 27.69	0.085 2.16	12.90	MW CG	N
1.1	27.940	72526S	5.00 127.000	0.930 23.622	5.60 0.980	3.200 81.280	18.000 80.064	1.090 27.69	0.085 2.16	12.90	SST CG	N
1.1	27.940	72604	5.00 127.000	0.830 21.082	35.00 6.125	2.700 68.580	95.000 422.560	2.300 58.42	0.135 3.43	17.00	MW CG	N
1.1	27.940	72604S	5.00 127.000	0.830 21.082	30.00 5.250	2.000 50.800	61.000 271.328	2.300 58.42	0.135 3.43	17.00	SST CG	N
1.1	27.940	72616	5.00 127.000	0.816 20.726	46.00 8.050	2.400 60.960	110.000 489.280	2.340 59.44	0.142 3.61	16.50	MW CG	N
1.1	27.940	72616S	5.00 127.000	0.816 20.726	39.00 6.825	1.800 45.720	71.000 315.808	2.340 59.44	0.142 3.61	16.50	SST CG	N
1.1	27.940	72626	5.00 127.000	0.804 20.422	54.00 9.450	2.300 58.420	124.000 551.552	2.480 62.99	0.148 3.76	16.80	MW CG	N
1.1	27.940	72626S	5.00 127.000	0.804 20.422	46.00 8.050	1.700 43.180	80.000 355.840	2.480 62.99	0.148 3.76	16.80	SST CG	N
1.109	28.169	II-8	0.69 17.526	0.869 22.073	308.00 53.900	0.160 4.064	49.000 217.952	0.360 9.14	0.120 3.05	3.00	SPR CG	N
1.109	28.169	1869	0.75 19.050	0.965 24.511	8.70 1.523	0.320 8.128	2.800 12.454	0.430 10.92	0.072 1.83	6.00	HD CG	Z
1.109	28.169	S-1258	1.00 25.400	0.899 22.835	75.00 13.125	0.420 10.668	32.000 142.336	0.420 12.67	0.105 2.67	4.00	SST CG	N
1.109	28.169	3752	1.00 25.400	0.859 21.819	134.00 23.450	0.410 10.414	54.000 240.192	0.590 14.99	0.125 3.18	4.75	SPR CG	Z
1.109	28.169	S-34	1.16 29.464	0.983 24.968	2.90 0.508	0.676 17.170	2.000 8.896	0.484 12.29	0.063 1.59	7.70	SST CG	N
1.109	28.169	11705	1.16 29.464	0.921 23.393	36.00 6.300	0.690 17.526	25.000 111.200	0.470 11.94	0.094 2.39	5.00	SPR CG	Z
1.109	28.169	12160	1.25 31.750	0.919 23.343	56.00 9.800	0.450 11.430	26.000 115.648	0.380 9.65	0.095 2.41	4.00	SPR CG	Z
1.109	28.169	10621	1.28 32.512	0.927 23.546	31.00 5.425	0.720 18.288	22.000 97.856	0.460 11.68	0.091 2.31	5.00	SPR CG	Z
1.109	28.169	12562	1.30 33.020	0.993 25.222	7.00 1.225	0.920 23.368	6.500 28.912	0.290 7.37	0.058 1.47	4.00	SPR C	N
1.109	28.169	S-55	1.38 35.052	0.869 22.073	62.00 10.850	0.620 15.748	38.000 169.024	0.760 19.30	0.120 3.05	6.33	SST CG	N
1.109	28.169	HH-33	1.38 35.052	0.809 20.549	206.00 36.050	0.430 10.922	90.000 400.320	0.900 22.86	0.150 3.81	6.00	SPR CG	Z
1.109	28.169	11697	1.53 38.862	0.885 22.479	57.00 9.975	0.700 17.780	40.000 177.920	0.670 17.02	0.112 2.84	6.00	SPR CG	Z
1.109	28.169	2681	1.78 45.212	0.861 21.869	59.00 10.325	0.790 20.066	47.000 209.056	0.990 25.15	0.124 3.15	8.00	HD CG	Z
1.109	28.169	UU-39	1.78 45.212	0.795 20.193	184.00 32.200	0.560 14.224	102.000 453.696	1.180 29.97	0.157 3.99	7.50	SPR CG	Z
1.109	28.169	S-3060	2.00 50.800	0.813 20.650	135.00 23.625	0.590 14.986	79.000 351.392	1.040 26.42	0.148 3.76	7.00	SST CG	N
1.109	28.169	B17-150	2.13 54.102	1.013 25.730	0.94 1.700	1.400 43.180	1.600 7.117	0.380 9.65	0			




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends E F n sh									
1.109	28.169	1817	10.00	254.000	0.899	22.835	6.40	1.120	6.900	175.260	44.000	195.712	3.150	80.01	0.105	2.67	29.00	MW	C	Z
1.109	28.169	4039	19.50	495.300	0.809	20.549	18.00	3.150	4.900	124.460	90.000	400.320	7.130	181.10	0.150	3.81	47.50	SPR	CG	Z
1.125	28.575	A14-51	0.75	19.050	1.001	25.425	9.40	1.645	0.473	12.014	4.400	19.571	0.277	7.04	0.063	1.59	3.40	SST	C	N
1.125	28.575	1549	0.81	20.574	0.875	22.225	351.00	61.425	0.220	5.588	76.000	338.048	0.500	12.70	0.125	3.18	3.00	MW	C	Z
1.125	28.575	S-205	0.88	22.352	1.023	25.984	2.70	0.473	0.590	14.986	1.600	7.117	0.280	7.11	0.051	1.30	4.50	SST	C	N
1.125	28.575	S-1405	0.88	22.352	0.915	23.241	82.00	14.350	0.380	9.652	31.000	137.888	0.390	9.91	0.105	2.67	3.75	SST	CG	N
1.125	28.575	S-931	0.97	24.638	1.023	25.984	1.70	0.298	0.660	16.764	1.100	4.893	0.310	7.87	0.051	1.30	6.00	SST	CG	N
1.125	28.575	11963	0.97	24.638	1.003	25.476	4.10	0.718	0.600	15.240	2.500	11.120	0.370	9.40	0.061	1.55	6.00	SPR	CG	Z
1.125	28.575	10482	1.00	25.400	0.965	24.511	26.00	4.550	0.610	15.494	16.000	71.168	0.320	8.13	0.080	2.03	4.00	SPR	CG	N
1.125	28.575	S-1383	1.06	26.924	0.915	23.241	57.00	9.975	0.550	13.970	31.000	137.888	0.470	11.94	0.105	2.67	4.50	SST	CG	N
1.125	28.575	3947	1.19	30.226	0.941	23.901	31.00	5.425	0.730	18.542	23.000	102.304	0.460	11.68	0.092	2.34	5.00	SPR	CG	Z
1.125	28.575	B17-147	1.22	30.988	1.005	25.527	7.70	1.348	0.910	23.114	7.100	31.581	0.240	6.10	0.060	1.52	4.00	SPR	CG	N
1.125	28.575	S-1236	1.25	31.750	0.981	24.917	9.60	1.680	0.890	22.606	8.500	37.808	0.360	9.14	0.072	1.83	5.00	SST	CG	N
1.125	28.575	11742	1.25	31.750	0.895	22.733	122.00	21.350	0.350	8.890	43.000	191.264	0.460	11.68	0.115	2.92	4.00	SPR	CG	Z
1.125	28.575	12271	1.38	35.052	0.995	25.273	4.20	0.735	0.950	24.130	4.000	17.792	0.420	10.67	0.065	1.65	6.50	SST	CG	N
1.125	28.575	S-147	1.41	35.814	1.031	26.187	0.89	0.156	1.000	25.400	0.890	3.959	0.400	10.16	0.047	1.19	7.50	SST	C	N
1.125	28.575	S-911	1.47	37.338	0.981	24.917	7.30	1.278	1.000	25.400	7.600	33.805	0.430	10.92	0.072	1.83	6.00	SST	CG	N
1.125	28.575	2945	1.50	38.100	1.017	25.832	5.00	0.875	1.000	25.400	5.200	23.130	0.270	6.86	0.054	1.37	4.00	SPR	C	Z
1.125	28.575	12001	1.50	38.100	0.935	23.749	27.00	4.725	0.930	23.622	25.000	111.200	0.570	14.48	0.095	2.41	6.00	SPR	CG	Z
1.125	28.575	S-1249	1.50	38.100	0.915	23.241	48.00	8.400	0.660	16.764	31.000	137.888	0.530	13.46	0.105	2.67	5.00	SST	CG	N
1.125	28.575	S-1561	1.50	38.100	0.875	22.225	87.00	15.225	0.570	14.478	50.000	222.400	0.690	17.53	0.125	3.18	5.50	SST	CG	N
1.125	28.575	10624	1.56	39.624	0.815	20.701	303.00	53.025	0.320	8.128	97.000	431.456	0.780	19.81	0.155	3.94	5.00	SPR	CG	Z
1.125	28.575	M-80	1.59	40.386	0.859	21.819	115.00	20.125	0.550	13.970	64.000	284.672	0.800	20.32	0.133	3.38	6.00	SPR	CG	Z
1.125	28.575	S-3242	1.72	43.688	1.003	25.476	3.70	0.648	1.400	35.560	5.000	22.240	0.370	9.40	0.061	1.55	6.00	SST	CG	N
1.125	28.575	3302	1.75	44.450	0.875	22.225	58.00	10.150	0.750	19.050	44.000	195.712	1.000	25.40	0.125	3.18	8.00	HD	CG	Z
1.125	28.575	11433	1.88	47.752	0.885	22.479	56.00	9.800	0.870	22.098	48.000	213.504	0.870	22.10	0.120	3.05	7.25	HD	CG	Z
1.125	28.575	11335	2.00	50.800	0.829	21.057	148.00	25.900	0.590	14.986	87.000	386.976	1.040	26.42	0.148	3.76	7.00	SPR	CG	Z
1.125	28.575	S-3239	2.09	53.086	0.945	24.003	19.00	3.325	1.100	27.940	20.000	88.960	0.540	13.72	0.090	2.29	6.00	SST	CG	N
1.125	28.575	4340	2.13	54.102	0.855	21.717	66.00	11.550	0.840	21.336	55.000	244.640	1.280	32.51	0.135	3.43	9.50	SPR	CG	Z
1.125	28.575	S-973	2.28	57.912	0.965	24.511	8.20	1.435	1.700	43.180	14.000	62.272	0.600	15.24	0.080	2.03	7.50	SST	CG	N
1.125	28.575	2694	2.31	58.674	0.933	23.698	20.00	3.500	1.300	33.020	26.000	115.648	0.720	18.29	0.096	2.44	7.50	HD	CG	Z
1.125	28.575	S-1569	2.38	60.452	0.875	22.225	69.00	12.075	0.720	18.288	50.000	222.400	0.810	20.57	0.125	3.18	6.50	SST	CG	N
1.125	28.575	10483	2.38	60.452	0.831	21.107	159.00	27.825	0.540	13.716	85.000	378.080	0.960	24.38	0.147	3.73	6.50	SPR	CG	Z
1.125	28.575	S-194	2.44	61.976	1.045	26.543	0.72	0.126	2.200	55.880	1.600	7.117	0.260	6.60	0.040	1.02	5.50	SST	C	N
1.125	28.575	1629	2.50	63.500	0.965	24.511	8.60	1.505	1.800	45.720	16.000	71.168	0.640	16.26	0.080	2.03	8.00	SPR	CG	Z
1.125	28.575	3965	2.50	63.500	0.905	22.987	31.00	5.425	1.200	30.480	38.000	169.024	0.940	23.88	0.110	2.79	8.50	SPR	CG	Z
1.125	28.575	S-466	2.50	63.500	0.885	22.479	59.00	10.325	0.750	19.050	44.000	195.712	0.760	19.30	0.120	3.05	6.33	SST	CG	N
1.125	28.575	12017	2.53	64.262	0.831	21.107	120.00	21.000	0.710	18.034	85.000	378.080	1.180	29.97	0.147	3.73	8.00	SPR	CG	Z
1.125	28.575	B-67	2.66	67.564	0.875	22.225	64.00	11.200	0.860	21.844	55.000	244.640	1.060	26.92	0.125	3.18	7.50	SPR	C	N
1.125	28.575	2567	2.69	68.326	0.995	25.273	4.30	0.753	2.100	53.340	9.000	40.032	0.460	11.68	0.065	1.65	7.00	SPR	CG	Z
1.125	28.575	11143	2.69	68.326	0.901	22.885	29.00	5.075	1.400	35.560	40.000	177.920	1.180	29.97	0.112	2.84	9.50	SPR	C	Z
1.125	28.575	11785	2.72	69.088	0.919	23.343	28.00	4.900	1.200	30.480	32.000	142.336	0.770	19.56	0.103	2.62	7.50	SPR	CG	N
1.125	28.575	10540	2.72	69.088	0.895	22.733	31.00	5.425	1.400	35.560	43.000	191.264	1.150	29.21	0.115	2.92	10.00	SPR	CG	Z
1.125	28.575	11203	2.75	69.850	0.901	22.885	27.00	4.725	1.500	38.100	40.000	177.920	1.230	31.24	0.112	2.84	10.00	SPR	C	Z
1.125	28.575	12076	2.78	70.612	0.811	20.599	175.00	30.625	0.580	14.732	101.000	449.248	1.180	29.97	0.157	3.99	7.50	SPR	CG	Z
1.125	28.575	2736	2.84	72.136	0.855	21.717	70.00	12.250	1.300	33.020	93.000	413.664	1.220	30.99	0.135	3.43	9.00	MW	CG	Z
1.125	28.575	825	2.88	73.152	0.855	21.717	60.00	10.500	1.100	27.940	67.000	298.016	1.520	38.61	0.135	3.43	10.30	HD	C	Z
1.125	28.575	2824	2.94	74.676	0.875	22.225	39.00	6.825	1.600	40.640	61.000	271.328	1.380	35.05	0.125	3.18	11.00	MW	CG	Z
1.125	28.575	S-1131	3.00	76.200	0.965	24.511	5.60	0.980	2.200	55.880	12.000	53.376	0.800	20.32	0.080	2.03	10.00	SST	CG	N
1.125	28.575	10643	3.00	76.200	0.943	23.952	14.00	2.450	2.000	50.800	28.000	124.544	1.470	37.34	0.105	2.67	14.00	SPR	CG	N
1.125	28.575	366	3.00	76.200	0.915	23.241	22.00	3.850	1.500	38.100	34.000	151.232	1.000	25.40	0.105	2.67	9.50	HD	CG	Z
1.125	28.575	59	3.00	76.200	0.741	18.821	275.00	48.125	0.630	16.002	172.000	765.056	2.060	52.32	0.192	4.88	10.80	HD	CG	Z
1.125	28.																			




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
1.125	28.575	838	12.00	304.800	0.741	18.821	61.00	10,675	2,800	71.120	172.000	765.056	8.020	203.71	0.192	4.88	41.80	HD	CG	Z
1.14	28.956	S-1466	0.59	14.986	0.858	21.793	496.00	86.800	0.138	3.505	68.000	302.464	0.430	10.92	0.142	3.61	3.00	SST	CG	N
1.14	28.956	S-305	1.00	25.400	0.956	24.282	31.00	5.425	0.490	12.446	15.000	66.720	0.510	12.95	0.092	2.34	4.50	SST	CG	N
1.14	28.956	11907	1.09	27.686	1.012	25.705	2.90	0.508	0.580	14.732	1.700	7.562	0.510	12.95	0.064	1.63	8.00	SST	CG	N
1.14	28.956	S-1047	1.25	31.750	0.900	22.860	81.00	14.175	0.540	13.716	44.000	195.712	0.600	15.24	0.120	3.05	5.00	SST	CG	N
1.14	28.956	10889	1.31	33.274	1.046	26.568	0.79	0.138	0.940	23.876	0.740	3.292	0.380	9.65	0.047	1.19	8.00	SST	CG	N
1.14	28.956	12321	1.50	38.100	1.030	26.162	2.20	0.385	1.100	27.940	2.400	10.675	0.370	9.40	0.055	1.40	6.75	SPR	CG	Z
1.14	28.956	12644	1.83	46.482	1.032	26.213	2.40	0.420	1.500	38.100	3.500	15.568	0.350	8.89	0.054	1.37	5.50	SST	CG	N
1.14	28.956	S-3008	1.88	47.752	0.880	22.352	99.00	17.325	0.540	13.716	53.000	235.744	0.720	18.29	0.130	3.30	5.50	SST	CG	N
1.14	28.956	S-1203	1.94	49.276	0.880	22.352	87.00	15.225	0.610	15.494	53.000	235.744	0.780	19.81	0.130	3.30	6.00	SST	CG	N
1.14	28.956	S-254	2.00	50.800	0.756	19.202	352.00	61.600	0.420	10.668	147.000	653.856	1.470	37.34	0.192	4.88	7.67	SST	CG	N
1.14	28.956	3999	2.25	57.150	0.956	24.282	19.00	3.325	1.200	30.480	23.000	102.304	0.620	15.75	0.092	2.34	6.75	SPR	CG	Z
1.14	28.956	11343	2.41	61.214	0.844	21.438	157.00	27.475	0.550	13.970	86.000	382.528	0.960	24.38	0.148	3.76	6.50	SPR	CG	Z
1.14	28.956	3173	2.56	65.024	0.956	24.282	13.00	2.275	1.700	43.180	22.000	97.856	0.830	21.08	0.092	2.34	9.00	SPR	CG	Z
1.14	28.956	3156	2.63	66.802	1.028	26.111	2.80	0.490	2.000	50.800	5.700	25.354	0.340	8.64	0.056	1.42	6.00	SPR	CG	Z
1.14	28.956	12755	2.84	72.136	0.766	19.456	232.00	40.600	0.770	19.558	178.000	791.744	2.010	51.05	0.187	4.75	10.80	OT	CG	N
1.14	28.956	11130	2.84	72.136	0.756	19.202	270.00	47.250	0.630	16.002	170.000	756.160	0.202	51.31	0.192	4.88	10.50	SPR	CG	Z
1.14	28.956	S-1168	3.00	76.200	0.960	24.384	8.90	1.558	2.100	53.340	19.000	84.512	0.900	22.86	0.090	2.29	10.00	SST	CG	N
1.14	28.956	11799	3.13	79.502	0.830	21.082	124.00	21.700	0.770	19.558	96.000	427.008	1.400	35.56	0.155	3.94	9.00	SPR	CG	Z
1.14	28.956	10365	3.19	81.026	0.844	21.438	76.00	13.300	1.100	27.940	86.000	382.528	1.670	42.42	0.148	3.76	11.30	SPR	CG	Z
1.14	28.956	4312	3.88	98.552	0.870	22.098	51.00	8.925	1.300	33.020	66.000	293.568	1.520	38.61	0.135	3.43	11.30	SPR	CG	Z
1.14	28.956	3158	4.00	101.600	0.890	22.606	30.00	5.250	1.800	45.720	54.000	240.192	1.780	45.21	0.125	3.18	14.00	SPR	CG	Z
1.14	28.956	S-1458	4.88	123.952	0.970	24.638	5.10	0.893	3.500	88.900	17.000	75.616	1.110	28.19	0.085	2.16	13.00	SST	CG	N
1.14	28.956	10571	4.88	123.952	0.890	22.606	23.00	4.025	2.300	58.420	54.000	240.192	2.060	52.32	0.125	3.18	16.50	SPR	CG	Z
1.14	28.956	12179	5.16	131.064	0.814	20.676	75.00	13.125	1.500	38.100	111.000	493.728	2.690	68.33	0.163	4.14	16.50	SPR	CG	Z
1.14	28.956	10458	5.25	133.350	0.968	24.587	6.70	1.173	2.900	73.660	19.000	84.512	1.030	26.16	0.086	2.18	12.00	SPR	CG	Z
1.14	28.956	10376	5.31	134.874	0.966	24.536	7.10	1.243	2.800	71.120	20.000	88.960	1.040	26.42	0.087	2.21	12.00	HD	CG	Z
1.14	28.956	3024	5.63	143.002	0.786	19.964	88.00	15.400	1.600	40.640	141.000	627.168	3.540	89.92	0.177	4.50	20.00	SPR	CG	Z
1.156	29.362	S-262	0.50	12.700	1.062	26.975	2.20	0.385	0.270	6.858	0.590	2.624	0.240	6.10	0.047	1.19	4.00	SST	C	N
1.156	29.362	3306	0.69	17.526	0.996	25.298	32.00	5.600	0.330	8.382	10.000	44.480	0.360	9.14	0.080	2.03	3.50	SPR	C	Z
1.156	29.362	10831	0.81	20.574	1.066	27.076	1.90	0.333	0.590	14.986	1.100	4.893	0.230	5.84	0.045	1.14	4.00	SST	C	N
1.156	29.362	B8-47	0.88	22.352	1.056	26.822	2.40	0.420	0.650	16.510	1.500	6.672	0.230	5.84	0.050	1.27	4.50	SST	CG	N
1.156	29.362	Q-32	0.88	22.352	1.044	26.518	9.40	1.645	0.560	14.224	5.300	23.574	0.170	4.32	0.056	1.42	3.00	SST	CG	N
1.156	29.362	S-1018	0.94	23.876	0.886	22.504	223.00	21.000	0.260	6.604	58.000	257.984	0.510	12.95	0.135	3.43	3.75	SST	CG	N
1.156	29.362	S-1070	1.00	25.400	0.832	21.133	584.00	102.200	0.160	4.064	96.000	427.008	0.570	14.48	0.162	4.11	3.50	SST	CG	N
1.156	29.362	12237	1.25	31.750	1.046	26.568	2.00	0.350	0.870	22.098	1.700	7.562	0.390	9.91	0.055	1.40	7.00	SPR	CG	Z
1.156	29.362	3468	1.25	31.750	0.980	24.892	24.00	4.200	0.810	20.574	19.000	84.512	0.440	11.18	0.088	2.24	5.00	SPR	CG	Z
1.156	29.362	3027	1.25	31.750	0.976	24.790	21.00	3.675	0.730	18.542	15.000	66.720	0.520	13.21	0.090	2.29	5.75	SPR	CG	Z
1.156	29.362	PP-40	1.28	32.512	0.896	22.758	109.00	19.075	0.530	13.462	58.000	257.984	0.720	18.29	0.130	3.30	5.50	SPR	CG	Z
1.156	29.362	4120	1.38	35.052	0.986	25.044	20.00	3.500	0.870	22.098	18.000	80.064	0.510	12.95	0.085	2.16	5.00	SPR	CG	Z
1.156	29.362	S-468	1.69	42.926	0.946	24.028	26.00	4.550	0.950	24.130	25.000	111.200	0.740	18.80	0.105	2.67	7.00	SST	CG	N
1.156	29.362	12208	1.78	45.212	0.900	22.860	71.00	12.425	0.760	19.304	54.000	240.192	1.020	25.91	0.128	3.25	7.00	MW	C	Z
1.156	29.362	11528	1.88	47.752	1.084	27.534	0.57	0.100	1.700	43.180	0.950	4.226	0.220	5.59	0.036	0.91	5.00	SPR	C	Z
1.156	29.362	S-79	1.94	49.276	1.050	26.670	1.50	0.263	1.600	40.640	2.400	10.675	0.360	9.14	0.052	1.32	6.75	SST	CG	N
1.156	29.362	3013	2.00	50.800	1.028	26.111	3.10	0.543	1.500	38.100	4.600	20.461	0.510	12.95	0.064	1.63	8.00	SPR	CG	Z
1.156	29.362	3255	2.13	54.102	0.870	22.098	105.00	18.375	0.730	18.542	77.000	342.496	1.070	27.18	0.143	3.63	7.50	SPR	CG	Z
1.156	29.362	2969	2.50	63.500	1.012	25.705	5.50	0.963	2.000	50.800	11.000	48.928	0.540	13.72	0.072	1.83	7.50	SPR	CG	Z
1.156	29.362	3368	2.63	66.802	0.946	24.028	21.00	3.675	1.600	40.640	33.000	146.784	0.970	24.64	0.105	2.67	9.25	SPR	CG	GI
1.156	29.362	Y-63	2.75	69.850	1.028	26.111	2.80	0.490	2.200	55.880	6.100	27.133	0.560	14.22	0.064	1.63	7.75	SST	C	N
1.156	29.362	3487	2.75	69.850	1.026	26.060	4.00	0.700	2.200	55.880	8.700	38.698	0.520	13.21	0.065	1.65	7.00	HD	C	Z
1.156	29.362	S-469	2.88	73.152	1.048	26.619	1.30	0.228	2.400	60.960	3.200	14.234	0.490	12.45	0.054	1.37	8.00	SST	C	N
1.156	29.362	S-153	3.00	76.200	1.048	26.619	1.30	0.228	2.500	63.500	3.200	14.234	0.500	12.70	0.054	1.37	8.25	SST	C	N
1.156	29.362	11624	3.25	82.550	0.916	23.														




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Ends Mat'l	F n sh									
1.172	29.769	3670	4.28	108.712	1.074	27.280	0.73	0.128	3.700	93.980	2.700	12.010	0.540	13.72	0.049	1.24	10.00	SPR	C	Z
1.172	29.769	11220	6.00	152.400	0.788	20.015	143.00	25.025	1.200	30.480	166.000	738.368	3.170	80.52	0.192	4.88	16.50	SPR	CG	Z
1.172	29.769	S-1616	7.00	177.800	0.988	25.095	3.30	0.578	4.700	119.380	15.000	66.720	2.300	58.42	0.092	2.34	24.00	SST	CG	N
1.172	29.769	10675	10.80	274.320	0.860	21.844	27.00	4.725	3.500	88.900	95.000	422.560	4.990	126.75	0.156	3.96	32.00	SPR	CG	Z
1.172	29.769	2742	11.30	287.020	0.908	23.063	11.00	1.925	5.200	132.080	60.000	266.880	4.880	123.95	0.132	3.35	36.00	SPR	C	Z
1.188	30.175	10160	0.44	11.176	1.028	26.111	43.00	7.525	0.200	5.080	8.600	38.253	0.240	6.10	0.080	2.03	3.00	SPR	CG	Z
1.188	30.175	10661	0.66	16.764	1.000	25.400	86.00	15.050	0.270	6.858	23.000	102.304	0.280	7.11	0.094	2.39	3.00	SPR	CG	Z
1.188	30.175	S-3078	0.75	19.050	0.928	23.571	241.00	42.175	0.210	5.334	51.000	226.848	0.420	10.67	0.130	3.30	3.25	SST	CG	N
1.188	30.175	S-3178	0.75	19.050	0.908	23.063	417.00	72.975	0.150	3.810	63.000	280.224	0.420	10.67	0.140	3.56	3.00	SST	CG	N
1.188	30.175	2844	0.81	20.574	0.808	20.523	1256.00	219.800	0.130	3.302	159.000	707.232	0.670	17.02	0.190	4.83	3.50	SPR	CG	Z
1.188	30.175	11918	1.00	25.400	1.066	27.076	4.10	0.718	0.700	17.780	2.900	12.899	0.310	7.87	0.061	1.55	5.00	SST	CG	N
1.188	30.175	1902	1.13	28.702	1.038	26.365	6.60	1.155	0.600	15.240	4.000	17.792	0.530	13.46	0.075	1.91	7.00	SPR	CG	Z
1.188	30.175	12540	1.38	35.052	1.028	26.111	17.00	2.975	0.860	21.844	15.000	66.720	0.440	11.18	0.080	2.03	4.50	SPR	C	N
1.188	30.175	533	1.38	35.052	0.978	24.841	50.00	8.750	0.640	16.256	32.000	142.336	0.600	15.24	0.105	2.67	4.75	HD	C	Z
1.188	30.175	11259	1.41	35.814	1.028	26.111	19.00	3.325	0.780	19.812	15.000	66.720	0.420	10.67	0.080	2.03	4.25	SPR	C	Z
1.188	30.175	12334	1.50	38.100	1.032	26.213	9.70	1.698	1.000	25.400	10.000	44.480	0.470	11.94	0.078	1.98	6.00	SPR	CG	Z
1.188	30.175	11642	1.50	38.100	1.028	26.111	14.00	2.450	1.000	25.400	15.000	66.720	0.400	10.16	0.080	2.03	5.00	SPR	CG	Z
1.188	30.175	3186	1.50	38.100	0.774	19.660	932.00	163.100	0.220	5.588	204.000	907.392	1.040	26.42	0.207	5.26	5.00	SPR	CG	Z
1.188	30.175	1849	1.53	38.862	1.006	25.552	30.00	5.250	0.980	24.892	29.000	128.992	0.410	10.41	0.091	2.31	4.50	MW	CG	Z
1.188	30.175	11485	1.59	40.386	1.020	25.908	18.00	3.150	0.970	24.638	17.000	75.616	0.500	12.70	0.084	2.13	5.00	SPR	C	Z
1.188	30.175	S-3058	1.88	47.752	1.068	27.127	3.20	0.560	1.500	38.100	4.800	21.350	0.390	9.91	0.060	1.52	5.50	SST	C	N
1.188	30.175	2992	1.88	47.752	0.938	23.825	65.00	11.375	0.800	20.320	52.000	231.296	0.810	20.57	0.125	3.18	6.50	SPR	CG	Z
1.188	30.175	1889	2.00	50.800	1.044	26.518	6.20	1.085	1.500	38.100	9.000	40.032	0.540	13.72	0.072	1.83	6.50	HD	C	Z
1.188	30.175	12437	2.00	50.800	1.040	26.416	7.30	1.278	1.500	38.100	11.000	48.928	0.540	13.72	0.074	1.88	6.25	SST	C	N
1.188	30.175	S-3133	2.00	50.800	0.978	24.841	28.00	4.900	1.100	27.940	30.000	133.440	0.760	19.30	0.105	2.67	6.25	SST	C	N
1.188	30.175	S-3186	2.00	50.800	0.918	23.317	71.00	12.425	0.800	20.320	57.000	253.536	0.950	24.13	0.135	3.43	7.00	SST	CG	N
1.188	30.175	S-3012	2.00	50.800	0.774	19.660	442.00	77.350	0.400	10.160	176.000	782.848	1.550	39.37	0.207	5.26	7.50	SST	CG	N
1.188	30.175	2792	2.19	55.626	0.918	23.317	58.00	10.150	0.970	24.638	57.000	253.536	1.220	30.99	0.135	3.43	9.00	SPR	CG	Z
1.188	30.175	12036	2.28	57.912	1.068	27.127	3.10	0.543	1.900	48.260	5.800	25.798	0.380	9.65	0.060	1.52	6.25	SPR	CG	Z
1.188	30.175	11160	2.28	57.912	0.876	22.250	163.00	28.525	0.580	14.732	94.000	418.112	1.050	26.67	0.156	3.96	6.75	SPR	CG	Z
1.188	30.175	1924	2.38	60.452	1.004	25.502	16.00	2.800	1.400	35.560	22.000	97.856	0.740	18.80	0.092	2.34	7.00	SPR	C	GI
1.188	30.175	857	2.38	60.452	0.918	23.317	68.00	11.900	0.930	23.622	63.000	280.224	1.220	30.99	0.135	3.43	8.00	HD	C	Z
1.188	30.175	11251	2.41	61.214	0.864	21.946	203.00	35.525	0.460	11.684	93.000	413.664	0.970	24.64	0.162	4.11	6.00	SST	CG	N
1.188	30.175	821	2.50	63.500	0.892	22.657	85.00	14.875	0.980	24.892	83.000	369.184	1.370	34.80	0.148	3.76	9.25	HD	CG	Z
1.188	30.175	3382	2.63	66.802	0.908	23.063	69.00	12.075	1.000	25.400	70.000	311.360	1.260	32.00	0.140	3.56	9.00	SPR	CG	Z
1.188	30.175	869	2.75	69.850	0.948	24.079	35.00	6.125	1.300	33.020	46.000	204.608	1.200	30.48	0.120	3.05	9.00	HD	C	Z
1.188	30.175	3469	2.75	69.850	0.918	23.317	58.00	10.150	1.100	27.940	63.000	280.224	1.220	30.99	0.135	3.43	9.00	HD	CG	Z
1.188	30.175	B8-64	3.00	76.200	0.862	21.895	119.00	20.825	0.781	19.837	93.000	413.664	1.409	35.79	0.162	4.11	8.70	SST	CG	N
1.188	30.175	11960	3.06	77.724	0.908	23.063	64.00	11.200	1.100	27.940	70.000	311.360	1.330	33.78	0.140	3.56	9.50	SPR	CG	Z
1.188	30.175	11414	3.13	79.502	0.978	24.841	18.00	3.150	1.800	45.720	32.000	142.336	1.000	25.40	0.105	2.67	9.50	HD	C	Z
1.188	30.175	11175	3.25	82.550	0.892	22.657	88.00	15.400	0.950	24.130	83.000	369.184	1.330	33.78	0.148	3.76	9.00	SPR	CG	Z
1.188	30.175	840	3.25	82.550	0.804	20.422	203.00	35.525	0.810	20.574	164.000	729.472	2.260	57.40	0.192	4.88	11.80	HD	CG	Z
1.188	30.175	43	3.25	82.550	0.734	18.644	434.00	75.950	0.590	14.986	255.000	1134.240	2.590	65.79	0.227	5.77	11.50	HD	CG	Z
1.188	30.175	S-165	3.50	88.900	1.094	27.788	0.46	0.081	3.000	76.200	1.400	6.227	0.520	13.21	0.047	1.19	11.00	SST	CG	N
1.188	30.175	S-949	3.94	100.076	0.812	20.625	169.00	29.575	0.798	20.269	135.000	600.480	2.060	52.32	0.187	4.75	11.00	SST	CG	N
1.188	30.175	3673	4.63	117.602	1.026	26.060	3.80	0.665	3.500	88.900	13.000	57.824	1.130	28.70	0.081	2.06	14.00	SPR	CG	Z
1.188	30.175	S-362	4.63	117.602	0.978	24.841	8.00	1.400	2.800	71.120	23.000	102.304	1.790	45.47	0.105	2.67	17.00	SST	CG	N
1.188	30.175	815	4.63	117.602	0.864	21.946	64.00	11.200	1.600	40.640	105.000	467.040	2.630	66.80	0.162	4.11	16.30	HD	C	Z
1.188	30.175	11690	4.75	120.650	0.858	21.793	77.00	13.475	1.400	35.560	111.000	493.728	2.480	62.99	0.165	4.19	15.00	SPR	CG	Z
1.188	30.175	2704	4.81	122.174	1.028	26.111	3.50	0.613	3.600	91.440	12.000	53.376	1.240	31.50	0.080	2.03	14.50	HD	C	Z
1.188	30.175	3260	5.25	133.350	0.834	21.184	114.00	19.950	1.200	30.480	136.000	604.928	2.480	62.99	0.177	4.50	14.00	SPR	CG	Z
1.188	30.175	3292	5.50	139.700	0.834	21.184	114.00	19.950	1.200	30.480	136.000	604.928	2.480	62.99	0.177	4.50				




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
1.203	30.556	12301	3.00 76.200	1.113 28.270	0.54 0.095	2.600 66.040	1.400 6.227	0.410 10.41	0.045 1.14	9.00	SPR CG	Z
1.203	30.556	4339	3.25 82.550	0.753 19.126	485.00 84.875	0.510 12.954	246.000 1094.208	2.360 59.94	0.225 5.72	10.50	SPR CG	Z
1.203	30.556	12090	3.38 85.852	1.079 27.407	1.60 0.280	2.753 69.926	4.400 19.571	0.627 15.93	0.063 1.59	10.00	SST CG	N
1.203	30.556	12002	3.38 85.852	1.013 25.730	14.00 2.450	1.600 40.640	24.000 106.752	0.760 19.30	0.095 2.41	8.00	SPR CG	Z
1.203	30.556	B18-201	3.47 88.138	1.061 26.949	2.50 0.438	2.700 68.580	6.700 29.802	0.780 19.81	0.071 1.80	11.00	SST CG	N
1.203	30.556	S-306	3.50 88.900	1.033 26.238	6.70 1.173	2.500 63.500	17.000 75.616	0.850 21.59	0.085 2.16	9.00	SST C	N
1.203	30.556	2955	3.56 90.424	1.063 27.000	2.50 0.438	2.700 68.580	6.700 29.802	0.880 22.35	0.070 1.78	11.50	SPR C	Z
1.203	30.556	2548	4.38 111.252	0.983 24.968	14.00 2.450	2.600 66.040	35.000 155.680	1.510 38.35	0.110 2.79	13.80	SPR CG	Z
1.203	30.556	1745	5.13 130.302	1.079 27.407	0.99 0.173	4.000 101.600	4.000 17.792	1.090 27.69	0.062 1.57	16.50	SPR C	Z
1.203	30.556	10974	5.88 149.352	0.963 24.460	15.00 2.625	3.100 78.740	46.000 204.608	2.160 54.86	0.120 3.05	18.00	HD CG	Z
1.203	30.556	1551	7.75 196.850	0.909 23.089	25.00 4.375	3.200 81.280	80.000 355.840	3.630 92.20	0.147 3.73	24.70	SPR CG	Z
1.203	30.556	S-346	16.00 406.400	1.023 25.984	1.60 0.280	11.000 279.400	19.000 84.512	3.560 90.42	0.090 2.29	38.50	SST C	N
1.219	30.963	11552	0.94 23.876	0.949 24.105	0.02 0.004	0.880 22.352	0.020 0.089	0.060 1.52	0.135 3.43	3.50	MW CG	Z
1.219	30.963	3444	0.94 23.876	0.943 23.952	275.00 48.125	0.240 6.096	66.000 293.568	0.480 12.19	0.138 3.51	3.50	SPR CG	Z
1.219	30.963	B10-8	1.00 25.400	0.969 24.613	119.00 20.825	0.390 9.906	46.000 204.608	0.500 12.70	0.125 3.18	4.00	SST CG	N
1.219	30.963	S-974	1.16 29.464	0.979 24.867	104.00 18.200	0.390 9.906	41.000 182.368	0.470 11.94	0.120 3.05	4.00	SST CG	N
1.219	30.963	12701	1.31 33.274	1.057 26.848	17.00 2.975	0.870 22.098	15.000 66.720	0.450 11.43	0.081 2.06	4.50	SPR C	N
1.219	30.963	10875	1.31 33.274	1.009 25.629	28.00 4.900	0.680 17.272	19.000 84.512	0.630 16.00	0.105 2.67	6.00	SST CG	N
1.219	30.963	10704	1.38 35.052	1.075 27.305	9.10 1.593	1.100 27.940	9.500 42.256	0.320 8.13	0.072 1.83	4.50	SST CG	N
1.219	30.963	12631	1.38 35.052	1.059 26.899	16.00 2.800	0.910 23.114	15.000 66.720	0.440 11.18	0.080 2.03	4.50	HD C	N
1.219	30.963	11353	1.38 35.052	0.895 22.733	297.00 51.975	0.310 7.874	91.000 404.768	0.730 18.54	0.162 4.11	4.50	SST CG	N
1.219	30.963	3451	1.44 36.576	1.035 26.289	36.00 6.300	0.590 14.986	21.000 93.408	0.370 9.40	0.092 2.34	4.00	HD CG	Z
1.219	30.963	2885	1.53 38.862	1.017 25.832	37.00 6.475	0.750 19.050	28.000 124.544	0.490 12.45	0.101 2.57	5.00	SPR CG	Z
1.219	30.963	11164	1.63 41.402	0.907 23.038	236.00 41.300	0.390 9.906	92.000 409.216	0.780 19.81	0.156 3.96	5.00	SPR CG	Z
1.219	30.963	KK-71	1.75 44.450	1.039 26.391	29.00 5.075	0.630 16.002	18.000 80.064	0.360 9.14	0.090 2.29	4.00	SST CG	N
1.219	30.963	10304	1.75 44.450	1.009 25.629	32.00 5.600	0.990 25.146	31.000 137.888	0.740 18.80	0.105 2.67	6.00	SPR C	Z
1.219	30.963	12096	1.75 44.450	0.859 21.819	384.00 67.200	0.350 8.890	133.000 591.584	0.990 25.15	0.180 4.57	5.50	SPR CG	Z
1.219	30.963	11120	1.97 50.038	0.879 22.327	198.00 34.650	0.600 15.240	118.000 524.864	1.230 31.24	0.170 4.32	7.25	SPR CG	Z
1.219	30.963	11579	2.22 56.388	0.951 24.155	60.00 10.500	1.000 25.400	60.000 266.880	1.210 30.73	0.134 3.40	8.00	SPR CG	N
1.219	30.963	4391	2.33 59.182	0.923 23.444	94.00 16.450	0.860 21.844	81.000 360.288	1.180 29.97	0.148 3.76	8.00	SPR CG	Z
1.219	30.963	S-955	2.34 59.436	1.035 26.289	14.00 2.450	1.400 35.560	20.000 88.960	0.600 15.24	0.092 2.34	6.50	SST CG	N
1.219	30.963	S-1336	2.38 60.452	1.037 26.340	14.00 2.450	1.400 35.560	19.000 84.512	0.680 17.27	0.091 2.31	6.50	SST C	N
1.219	30.963	11320	2.38 60.452	0.907 23.038	177.00 30.975	0.520 13.208	92.000 409.216	0.940 23.88	0.156 3.96	6.00	SPR CG	Z
1.219	30.963	B18-194	2.44 61.976	1.129 28.677	0.52 0.091	2.000 50.800	1.100 4.893	0.410 10.41	0.045 1.14	9.00	SPR CG	N
1.219	30.963	11932	2.50 63.500	0.825 20.955	387.00 67.725	0.430 10.922	168.000 747.264	1.430 36.32	0.197 5.00	7.25	SPR CG	N
1.219	30.963	3404	2.75 69.850	1.009 25.629	23.00 4.025	1.400 35.560	31.000 137.888	0.860 21.84	0.105 2.67	8.00	SPR CG	Z
1.219	30.963	S-3053	2.88 73.152	1.075 27.305	5.60 0.980	1.800 45.720	10.000 44.480	0.500 12.70	0.072 1.83	6.00	SST C	N
1.219	30.963	12328	3.00 76.200	1.119 28.423	1.00 0.175	2.600 66.040	2.600 11.565	0.430 10.92	0.050 1.27	7.50	SPR C	Z
1.219	30.963	S-1375	3.00 76.200	1.117 28.372	0.59 0.103	2.400 60.960	1.400 6.227	0.610 15.49	0.051 1.30	11.00	SST C	N
1.219	30.963	B18-182	3.22 81.788	0.725 18.415	574.00 100.450	0.478 12.141	274.000 1218.752	2.837 72.06	0.250 6.35	11.30	SST CG	N
1.219	30.963	4302	3.25 82.550	1.009 25.629	16.00 2.800	2.000 50.800	31.000 137.888	1.050 26.67	0.105 2.67	10.00	SPR CG	Z
1.219	30.963	11858	3.84 97.536	1.043 26.492	7.60 1.330	2.400 60.960	18.000 80.064	0.790 20.07	0.088 2.24	9.00	SST CG	N
1.219	30.963	7056	4.00 101.600	0.865 21.971	99.00 17.325	1.200 30.480	118.000 524.864	2.480 62.99	0.177 4.50	13.00	SST C	N
1.219	30.963	10989	4.06 103.124	0.805 20.447	255.00 44.625	0.780 19.812	199.000 885.152	2.480 62.99	0.207 5.26	12.00	HD CG	Z
1.219	30.963	283	4.50 114.300	0.895 22.733	70.00 12.250	1.500 38.100	103.000 458.144	2.270 57.66	0.162 4.11	14.00	HD CG	Z
1.219	30.963	11731	7.50 190.500	0.895 22.733	41.00 7.175	2.500 63.500	103.000 458.144	3.650 92.71	0.162 4.11	22.50	SPR CG	Z
1.219	30.963	2841	7.75 196.850	0.923 23.444	24.00 4.200	3.400 86.360	81.000 360.288	3.770 95.76	0.148 3.76	25.50	HD CG	Z
1.219	30.963	4174	12.00 304.800	1.039 26.391	3.00 0.525	6.700 170.180	20.000 88.960	2.250 57.15	0.090 2.29	24.00	SPR C	Z
1.225	31.115	72627	0.88 22.352	1.055 26.797	37.00 6.475	0.590 14.986	22.000 97.856	0.290 7.37	0.085 2.16	3.38	MW CG	N
1.225	31.115	72627S	0.88 22.352	1.055 26.797	31.00 5.425	0.520 13.208	16.000 71.168	0.290 7.37	0.085 2.16	3.38	SST CG	N
1.225	31.115	72637S	0.88 22.352	1.033 26.238	51.00 8.925	0.425 10.795	22.000 97.856	0.321 8.15	0.095 2.41	3.40	SST CG	N
1.225	31.115	72637	0.88 22.352	1.033 26.238	60.00 10.500	0.560 14.224	33.000 146.784	0.320 8.13	0.096 2.44	3.38	MW CG	N
1.225	31.115	72651	0.88 22.352	1.015 25.781	83.00 14.525	0.510 12.954	42.000 186.816	0.370 9.40	0.105 2.67	3.50	MW CG	N
1.225	31.115	72651S	0.88 22.352	1.015 25.781	70.00 12.250	0.410 10.414	29.000 128.992	0.370 9.40	0.105 2.67	3.50	SST CG	N
1.225	31.115	72664	0.88 22.352	1.001 25.425	105.00 18.375	0.490 12.446	51.000 226.848	0.390 9.91	0.112 2.84	3.50	MW CG	N
1.225	31.115	72664S	0.88 22.352	1.001 25.425	89.00 15.575	0.370 9.398	33.000 146.784	0.390 9.91	0.112 2.84	3.50	SST CG	N
1.225	31.115	72679	0.88 22.352	0.975 24.765	161.00 28.175	0.430 10.922	69.000 306.912	0.450 11.43	0.125 3.18	3.63	MW CG	N
1.225	31.115	72679S	0.88 22.352	0.975 24.765	137.00 23.975	0.340 8.636	46.000 204.608	0.450 11.43	0.125 3.18	3.63	SST CG	N
1.225	31.115	72693	0.88 22.352	0.955 24.257	219.00 38.325	0.390 9.906	86.000 382.528	0.490 12.45	0.135 3.43	3.63	MW CG	N
1.225	31.115	72693S	0.88 22.352	0.955 24.257	186.00 32.550	0.300 7.620	55.000 244.640	0.490 12.45	0.135 3.43	3.63	SST CG	N
1.225	31.115	72708	0.88 22.352	0.929 23.597	325.00 56.875	0.330 8.382	106.000 471.488	0.560 14.22	0.148 3.76	3.76	MW CG	N
1.225	31.115	72628	1.00 25.400	1.055 26.797	31.00 5.425	0.690 17.526	22.000 97.856	0.310 7.87	0.085 2.16	3.63	MW CG	N




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
1.225	31.115	72653	1.25 31.750	1.015 25.781	53.00 9.275	0.790 20.066	42.000 186.816	0.460 11.68	0.105 2.67	4.38	MW	CG N
1.225	31.115	72653S	1.25 31.750	1.015 25.781	45.00 7.875	0.640 16.256	29.000 128.992	0.460 11.68	0.105 2.67	4.38	SST	CG N
1.225	31.115	72666	1.25 31.750	1.001 25.425	67.00 11.725	0.750 19.050	50.000 222.400	0.500 12.70	0.112 2.84	4.50	MW	CG N
1.225	31.115	72666S	1.25 31.750	1.001 25.425	57.00 9.975	0.590 14.986	33.000 146.784	0.500 12.70	0.112 2.84	4.50	SST	CG N
1.225	31.115	72681	1.25 31.750	0.975 24.765	101.00 17.675	0.670 17.018	68.000 302.464	0.580 14.73	0.125 3.18	4.63	MW	CG N
1.225	31.115	72681S	1.25 31.750	0.975 24.765	86.00 15.050	0.540 13.716	46.000 204.608	0.580 14.73	0.125 3.18	4.63	SST	CG N
1.225	31.115	72695	1.25 31.750	0.955 24.257	136.00 23.800	0.610 15.494	83.000 369.184	0.640 16.26	0.135 3.43	4.75	MW	CG N
1.225	31.115	72695S	1.25 31.750	0.955 24.257	116.00 20.300	0.480 12.192	55.000 244.640	0.640 16.26	0.135 3.43	4.75	SST	CG N
1.225	31.115	72710	1.25 31.750	0.929 23.597	199.00 34.825	0.550 13.970	109.000 484.832	0.700 17.78	0.148 3.76	4.75	MW	CG N
1.225	31.115	72710S	1.25 31.750	0.929 23.597	169.00 29.575	0.430 10.922	73.000 324.704	0.700 17.78	0.148 3.76	4.75	SST	CG N
1.225	31.115	72629	1.50 38.100	1.055 26.797	19.00 3.325	1.100 27.940	21.000 93.408	0.390 9.91	0.085 2.16	4.63	MW	CG N
1.225	31.115	72629S	1.50 38.100	1.055 26.797	16.00 2.800	0.990 25.146	16.000 71.168	0.390 9.91	0.085 2.16	4.63	SST	CG N
1.225	31.115	72640S	1.50 38.100	1.033 26.238	26.00 4.550	0.838 21.285	22.000 97.856	0.448 11.38	0.095 2.41	4.70	SST	CG N
1.225	31.115	72640	1.50 38.100	1.033 26.238	31.00 5.425	1.000 25.400	32.000 142.336	0.460 11.68	0.096 2.44	4.75	MW	CG N
1.225	31.115	72654	1.50 38.100	1.015 25.781	43.00 7.525	0.990 25.146	42.000 186.816	0.510 12.95	0.105 2.67	4.88	MW	CG N
1.225	31.115	72654S	1.50 38.100	1.015 25.781	36.00 6.300	0.800 20.320	29.000 128.992	0.510 12.95	0.105 2.67	4.88	SST	CG N
1.225	31.115	72667	1.50 38.100	1.001 25.425	54.00 9.450	0.940 23.876	50.000 222.400	0.560 14.22	0.112 2.84	5.00	MW	CG N
1.225	31.115	72667S	1.50 38.100	1.001 25.425	46.00 8.050	0.730 18.542	33.000 146.784	0.560 14.22	0.112 2.84	5.00	SST	CG N
1.225	31.115	72682	1.50 38.100	0.975 24.765	81.00 14.175	0.840 21.336	68.000 302.464	0.660 16.76	0.125 3.18	5.25	MW	CG N
1.225	31.115	72682S	1.50 38.100	0.975 24.765	69.00 12.075	0.670 17.018	46.000 204.608	0.660 16.76	0.125 3.18	5.25	SST	CG N
1.225	31.115	72696	1.50 38.100	0.955 24.257	116.00 20.300	0.740 18.796	86.000 382.528	0.690 17.53	0.135 3.43	5.13	MW	CG N
1.225	31.115	72696S	1.50 38.100	0.955 24.257	98.00 17.150	0.560 14.224	55.000 244.640	0.690 17.53	0.135 3.43	5.13	SST	CG N
1.225	31.115	72711	1.50 38.100	0.929 23.597	158.00 27.650	0.690 17.526	108.000 480.384	0.810 20.57	0.148 3.76	5.50	MW	CG N
1.225	31.115	72711S	1.50 38.100	0.929 23.597	134.00 23.450	0.540 13.716	73.000 324.704	0.810 20.57	0.148 3.76	5.50	SST	CG N
1.225	31.115	72730	1.50 38.100	0.901 22.885	238.00 41.650	0.600 15.240	143.000 636.064	0.890 22.61	0.162 4.11	5.50	MW	CG N
1.225	31.115	72730S	1.50 38.100	0.901 22.885	203.00 35.525	0.450 11.430	91.000 404.768	0.890 22.61	0.162 4.11	5.50	SST	CG N
1.225	31.115	72743	1.50 38.100	0.871 22.123	353.00 61.775	0.520 13.208	185.000 822.880	0.970 24.64	0.177 4.50	5.50	MW	CG N
1.225	31.115	72743S	1.50 38.100	0.871 22.123	300.00 52.500	0.390 9.906	118.000 524.864	0.970 24.64	0.177 4.50	5.50	SST	CG N
1.225	31.115	72751	1.50 38.100	0.841 21.361	516.00 90.300	0.440 11.176	226.000 1005.248	1.030 26.16	0.192 4.88	5.38	MW	CG N
1.225	31.115	72751S	1.50 38.100	0.841 21.361	439.00 76.825	0.310 7.874	138.000 613.824	0.100 26.16	0.192 4.88	5.38	SST	CG N
1.225	31.115	72641S	1.75 44.450	1.033 26.238	22.00 3.850	0.985 25.019	22.000 97.856	0.495 12.57	0.095 2.41	5.20	SST	CG N
1.225	31.115	72641	1.75 44.450	1.033 26.238	26.00 4.550	1.200 30.480	33.000 146.784	0.500 12.70	0.096 2.44	5.25	MW	CG N
1.225	31.115	72656	1.75 44.450	1.015 25.781	37.00 6.475	1.200 30.480	44.000 195.712	0.560 14.22	0.105 2.67	5.38	MW	CG N
1.225	31.115	72656S	1.75 44.450	1.015 25.781	31.00 5.425	0.920 23.368	29.000 128.992	0.560 14.22	0.105 2.67	5.38	SST	CG N
1.225	31.115	72669	1.75 44.450	1.001 25.425	51.00 8.925	1.000 25.400	51.000 226.848	0.590 14.99	0.112 2.84	5.25	MW	CG N
1.225	31.115	72669S	1.75 44.450	1.001 25.425	43.00 7.525	0.770 19.558	33.000 146.784	0.590 14.99	0.112 2.84	5.25	SST	CG N
1.225	31.115	72683	1.75 44.450	0.975 24.765	67.00 11.725	1.000 25.400	68.000 302.464	0.730 18.54	0.125 3.18	5.88	MW	CG N
1.225	31.115	72683S	1.75 44.450	0.975 24.765	57.00 9.975	0.810 20.574	46.000 204.608	0.730 18.54	0.125 3.18	5.88	SST	CG N
1.225	31.115	72698	1.75 44.450	0.955 24.257	92.00 16.100	0.930 23.622	86.000 382.528	0.810 20.57	0.135 3.43	6.00	MW	CG N
1.225	31.115	72698S	1.75 44.450	0.955 24.257	78.00 13.650	0.710 18.034	55.000 244.640	0.810 20.57	0.135 3.43	6.00	SST	CG N
1.225	31.115	72713	1.75 44.450	0.929 23.597	134.00 23.450	0.840 21.336	113.000 502.624	0.910 23.11	0.148 3.76	6.13	MW	CG N
1.225	31.115	72713S	1.75 44.450	0.929 23.597	114.00 19.950	0.640 16.256	73.000 324.704	0.910 23.11	0.148 3.76	6.13	SST	CG N
1.225	31.115	72630	2.00 50.800	1.055 26.797	14.00 2.450	1.500 38.100	21.000 93.408	0.480 12.19	0.085 2.16	5.63	MW	CG N
1.225	31.115	72630S	2.00 50.800	1.055 26.797	12.00 2.100	1.400 35.560	16.000 71.168	0.480 12.19	0.085 2.16	5.63	SST	CG N
1.225	31.115	72642S	2.00 50.800	1.033 26.238	19.00 3.325	1.141 28.981	22.000 97.856	0.543 13.79	0.095 2.41	5.70	SST	CG N
1.225	31.115	72642	2.00 50.800	1.033 26.238	23.00 4.025	1.400 35.560	33.000 146.784	0.550 13.97	0.096 2.44	5.75	MW	CG N
1.225	31.115	72657	2.00 50.800	1.015 25.781	31.00 5.425	1.400 35.560	42.000 186.816	0.630 16.00	0.105 2.67	6.00	MW	CG N
1.225	31.115	72657S	2.00 50.800	1.015 25.781	26.00 4.550	1.100 27.940	29.000 128.992	0.630 16.00	0.105 2.67	6.00	SST	CG N
1.225	31.115	72670	2.00 50.800	1.001 25.425	39.00 6.825	1.300 33.020	50.000 222.400	0.700 17.78	0.112 2.84	6.25	MW	CG N
1.225	31.115	72670S	2.00 50.800	1.001 25.425	33.00 5.775	1.000 25.400	33.000 146.784	0.700 17.78	0.112 2.84	6.25	SST	CG N
1.225	31.115	72684	2.00 50.800	0.975 24.765	58.00 10.150	1.200 30.480	68.000 302.464	0.830 21.08	0.125 3.18	6.63	MW	CG N
1.225	31.115	72684S	2.00 50.800	0.975 24.765	49.00 8.575	0.940 23.876	46.000 204.608	0.830 21.08	0.125 3.18	6.63	SST	CG N
1.225	31.115	72699	2.00 50.800	0.955 24.257	82.00 14.350	1.000 25.400	86.000 382.528	0.880 22.35	0.135 3.43	6.50	MW	CG N
1.225	31.115	72699S	2.00 50.800	0.955 24.257	70.00 12.250	0.790 20.066	55.000 244.640	0.880 22.35	0.135 3.43	6.50	SST	CG N
1.225	31.115	72714	2.00 50.800	0.929 23.597	111.00 19.425	0.960 24.384	107.000 475.936	1.040 26.42	0.148 3.76	7.00	MW	CG N
1.225	31.115	72714S	2.00 50.800	0.929 23.597	95.00 16.625	0.770 19.558	73.000 324.704	1.040 26.42	0.148 3.76	7.00	SST	CG N
1.225	31.115	72731	2.00 50.800	0.901 22.885	167.00 29.225	0.860 21.844	143.000 636.064	1.110 28.19	0.162 4.11	6.88	MW	CG N
1.225	31.115	72731S	2.00 50.800	0.901 22.885	142.00 24.850	0.640 16.256	91.000 404.768	1.110 28.19	0.162 4.11	6.88	SST	CG N
1.225	31.115	72744	2.00 50.800	0.871 22.123	246.00 43.050	0.750 19.050	185.000 822.880	1.240 31.50	0.177 4.50	7.00	MW	CG N
1.225	31.115	72744S	2.00 50.800	0.871 22.123	209.00 36.575	0.560 14.224	118.000 524.864	1.240 31.50	0.177 4.50	7.00	SST	CG N
1.225	31.115	72752	2.00 50.800	0.841 21.361	356.00 62.300	0.630 16.002	226.000 1005.248	1.340 34.04	0.192 4.88	7.00	MW	CG N




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns
1.225	31.115	72686	2.50 63.500	0.975 24.765	45.00 7.875	1.500 38.100	68.000 302.464	0.980 24.89	0.125 3.18	7.88	MW CG	N
1.225	31.115	72686S	2.50 63.500	0.975 24.765	38.00 6.650	1.200 30.480	46.000 204.608	0.980 24.89	0.125 3.18	7.88	SST CG	N
1.225	31.115	72700	2.50 63.500	0.955 24.257	64.00 11.200	1.300 33.020	86.000 382.528	1.050 26.67	0.135 3.43	7.75	MW CG	N
1.225	31.115	72700S	2.50 63.500	0.955 24.257	54.00 9.450	1.000 25.400	55.000 244.640	1.050 26.67	0.135 3.43	7.75	SST CG	N
1.225	31.115	72715	2.50 63.500	0.929 23.597	86.00 15.050	1.300 33.020	109.000 484.832	1.240 31.50	0.148 3.76	8.38	MW CG	N
1.225	31.115	72715S	2.50 63.500	0.929 23.597	73.00 12.775	0.990 25.146	73.000 324.704	1.240 31.50	0.148 3.76	8.38	SST CG	N
1.225	31.115	72722	2.50 63.500	0.913 23.190	113.00 19.775	1.100 27.940	128.000 569.344	1.270 32.26	0.156 3.96	8.13	MW CG	N
1.225	31.115	72722S	2.50 63.500	0.913 23.190	96.00 16.800	0.850 21.590	81.000 360.288	1.270 32.26	0.156 3.96	8.13	SST CG	N
1.225	31.115	72733	2.50 63.500	0.901 22.885	131.00 22.925	1.100 27.940	143.000 636.064	1.340 34.04	0.162 4.11	8.25	MW CG	N
1.225	31.115	72733S	2.50 63.500	0.901 22.885	111.00 19.425	0.820 20.828	91.000 404.768	1.340 34.04	0.162 4.11	8.25	SST CG	N
1.225	31.115	72745	2.50 63.500	0.871 22.123	189.00 33.075	0.980 24.892	185.000 822.880	1.500 38.10	0.177 4.50	8.50	MW CG	N
1.225	31.115	72745S	2.50 63.500	0.871 22.123	160.00 28.000	0.730 18.542	118.000 524.864	1.500 38.10	0.177 4.50	8.50	SST CG	N
1.225	31.115	72753	2.50 63.500	0.841 21.361	272.00 47.600	0.830 21.082	226.000 1005.248	1.630 41.40	0.192 4.88	8.50	MW CG	N
1.225	31.115	72753S	2.50 63.500	0.841 21.361	231.00 40.425	0.600 15.240	138.000 613.824	1.630 41.40	0.192 4.88	8.50	SST CG	N
1.225	31.115	72760	2.50 63.500	0.811 20.599	384.00 67.200	0.730 18.542	281.000 1249.888	1.760 44.70	0.207 5.26	8.50	MW CG	N
1.225	31.115	72760S	2.50 63.500	0.811 20.599	326.00 57.050	0.520 13.208	171.000 760.608	1.760 44.70	0.207 5.26	8.50	SST CG	N
1.225	31.115	72645S	2.75 69.850	1.033 26.238	14.00 2.450	1.549 39.345	22.000 97.856	0.669 16.99	0.095 2.41	7.00	SST CG	N
1.225	31.115	72645	2.75 69.850	1.033 26.238	16.00 2.800	2.000 50.800	32.000 142.336	0.710 18.03	0.096 2.44	7.38	MW CG	N
1.225	31.115	72687	2.75 69.850	0.975 24.765	40.00 7.000	1.700 43.180	68.000 302.464	1.060 26.92	0.125 3.18	8.50	MW CG	N
1.225	31.115	72687S	2.75 69.850	0.975 24.765	34.00 5.950	1.300 33.020	46.000 204.608	1.060 26.92	0.125 3.18	8.50	SST CG	N
1.225	31.115	72632	3.00 76.200	1.055 26.797	9.10 1.593	2.400 60.960	21.000 93.408	0.650 16.51	0.085 2.16	7.63	MW CG	N
1.225	31.115	72632S	3.00 76.200	1.055 26.797	7.70 1.348	2.100 53.340	16.000 71.168	0.650 16.51	0.085 2.16	7.63	SST CG	N
1.225	31.115	72646S	3.00 76.200	1.033 26.238	12.00 2.100	1.807 45.898	22.000 97.856	0.749 19.02	0.095 2.41	7.90	SST CG	N
1.225	31.115	72646	3.00 76.200	1.033 26.238	15.00 2.625	2.200 55.880	33.000 146.784	0.760 19.30	0.096 2.44	7.88	MW CG	N
1.225	31.115	72659	3.00 76.200	1.015 25.781	20.00 3.500	2.100 53.340	42.000 186.816	0.880 22.35	0.105 2.67	8.38	MW CG	N
1.225	31.115	72659S	3.00 76.200	1.015 25.781	17.00 2.975	1.700 43.180	29.000 128.992	0.880 22.35	0.105 2.67	8.38	SST CG	N
1.225	31.115	72672	3.00 76.200	1.001 25.425	25.00 4.375	2.000 50.800	50.000 222.400	0.970 24.64	0.112 2.84	8.63	MW CG	N
1.225	31.115	72672S	3.00 76.200	1.001 25.425	21.00 3.675	1.600 40.640	33.000 146.784	0.970 24.64	0.112 2.84	8.63	SST CG	N
1.225	31.115	72688	3.00 76.200	0.975 24.765	37.00 6.475	1.900 48.260	68.000 302.464	1.140 28.96	0.125 3.18	9.13	MW CG	N
1.225	31.115	72688S	3.00 76.200	0.975 24.765	31.00 5.425	1.500 38.100	46.000 204.608	1.140 28.96	0.125 3.18	9.13	SST CG	N
1.225	31.115	72701	3.00 76.200	0.955 24.257	52.00 9.100	1.600 40.640	86.000 382.528	1.230 31.24	0.135 3.43	9.13	MW CG	N
1.225	31.115	72701S	3.00 76.200	0.955 24.257	44.00 7.700	1.200 30.480	55.000 244.640	1.230 31.24	0.135 3.43	9.13	SST CG	N
1.225	31.115	72716	3.00 76.200	0.929 23.597	70.00 12.250	1.500 38.100	108.000 480.384	1.460 37.08	0.148 3.76	9.88	MW CG	N
1.225	31.115	72716S	3.00 76.200	0.929 23.597	60.00 10.500	1.200 30.480	73.000 324.704	1.460 37.08	0.148 3.76	9.88	SST CG	N
1.225	31.115	72723	3.00 76.200	0.913 23.190	93.00 16.275	1.400 35.560	128.000 569.344	1.480 37.59	0.156 3.96	9.50	MW CG	N
1.225	31.115	72723S	3.00 76.200	0.913 23.190	79.00 13.825	1.000 25.400	81.000 360.288	1.480 37.59	0.156 3.96	9.50	SST CG	N
1.225	31.115	72734	3.00 76.200	0.901 22.885	107.00 18.725	1.300 33.020	143.000 636.064	1.560 39.62	0.162 4.11	9.63	MW CG	N
1.225	31.115	72734S	3.00 76.200	0.901 22.885	91.00 15.925	1.000 25.400	91.000 404.768	1.560 39.62	0.162 4.11	9.63	SST CG	N
1.225	31.115	72746	3.00 76.200	0.871 22.123	153.00 26.775	1.200 30.480	185.000 822.880	1.770 44.96	0.177 4.50	10.00	MW CG	N
1.225	31.115	72746S	3.00 76.200	0.871 22.123	130.00 22.750	0.900 22.860	118.000 524.864	1.770 44.96	0.177 4.50	10.00	SST CG	N
1.225	31.115	72754	3.00 76.200	0.841 21.361	220.00 38.500	1.000 25.400	226.000 1005.248	1.920 48.77	0.192 4.88	10.00	MW CG	N
1.225	31.115	72754S	3.00 76.200	0.841 21.361	187.00 32.725	0.740 18.796	138.000 613.824	1.920 48.77	0.192 4.88	10.00	SST CG	N
1.225	31.115	72761	3.00 76.200	0.811 20.599	310.00 54.250	0.900 22.860	280.000 1245.440	2.100 53.34	0.207 5.26	10.10	MW CG	N
1.225	31.115	72761S	3.00 76.200	0.811 20.599	263.00 46.025	0.650 16.510	171.000 760.608	2.100 53.34	0.207 5.26	10.10	SST CG	N
1.225	31.115	72633	3.50 88.900	1.055 26.797	7.80 1.365	2.800 71.120	22.000 97.856	0.720 18.29	0.085 2.16	8.50	MW CG	N
1.225	31.115	72633S	3.50 88.900	1.055 26.797	6.60 1.155	2.500 63.500	16.000 71.168	0.720 18.29	0.085 2.16	8.50	SST CG	N
1.225	31.115	72647S	3.50 88.900	1.033 26.238	10.00 1.750	2.168 55.067	22.000 97.856	0.860 21.84	0.095 2.41	9.10	SST CG	N
1.225	31.115	72647	3.50 88.900	1.033 26.238	12.00 2.100	2.600 66.040	33.000 146.784	0.850 21.59	0.096 2.44	8.88	MW CG	N
1.225	31.115	72660	3.50 88.900	1.015 25.781	17.00 2.975	2.500 63.500	42.000 186.816	1.000 25.40	0.105 2.67	9.50	MW CG	N
1.225	31.115	72660S	3.50 88.900	1.015 25.781	14.00 2.450	2.000 50.800	29.000 128.992	1.000 25.40	0.105 2.67	9.50	SST CG	N
1.225	31.115	72673	3.50 88.900	1.001 25.425	21.00 3.675	2.400 60.960	50.000 222.400	1.110 28.19	0.112 2.84	9.88	MW CG	N
1.225	31.115	72673S	3.50 88.900	1.001 25.425	18.00 3.150	1.900 48.260	33.000 146.784	1.110 28.19	0.112 2.84	9.88	SST CG	N
1.225	31.115	72689	3.50 88.900	0.975 24.765	31.00 5.425	2.200 55.880	68.000 302.464	1.310 33.27	0.125 3.18	10.50	MW CG	N
1.225	31.115	72689S	3.50 88.900	0.975 24.765	26.00 4.550	1.700 43.180	46.000 204.608	1.310 33.27	0.125 3.18	10.50	SST CG	N
1.225	31.115	72702	3.50 88.900	0.955 24.257	44.00 7.700	2.000 50.800	86.000 382.528	1.400 35.56	0.135 3.43	10.40	MW CG	N
1.225	31.115	72702S	3.50 88.900	0.955 24.257	37.00 6.475	1.500 38.100	55.000 244.640	1.400 35.56	0.135 3.43	10.40	SST CG	N
1.225	31.115	72717	3.50 88.900	0.929 23.597	59.00 10.325	1.800 45.720	108.000 480.384	1.680 42.67	0.148 3.76	11.40	MW CG	N
1.225	31.115	72717S	3.50 88.900	0.929 23.597	50.00 8.750	1.400 35.560	73.000 324.704	1.680 42.67	0.148 3.76	11.40	SST CG	N
1.225	31.115	72724	3.50 88.900	0.913 23.190	78.00 13.650	1.600 40.640	128.000 569.344	1.700 43.18	0.156 3.96	10.90	MW CG	N
1.225	31.115	72724S	3.50 88.900	0.913 23.190	66.00 11.550	1.200 30.480	81.000 360.288	1.700 43.18	0.156 3.96	10.90	SST CG	N
1.225	31.115	72735	3.50 88.900	0.901 22.885	90.00 15.750	1.600 40.640	143.000 636.064	1.820 46.23	0.162 4.11	11.30	MW CG	N
1.225	31.115	72735S	3.50 88.900									




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh
1.225	31.115	72690	4.00 101.600	0.975 24.765	27.00 4.725	2.500 63.500	68.000 302.464	1.470 37.34	0.125 3.18	11.80	MW	CG N
1.225	31.115	72690S	4.00 101.600	0.975 24.765	23.00 4.025	2.000 50.800	46.000 204.608	1.470 37.34	0.125 3.18	11.80	SST	CG N
1.225	31.115	72703	4.00 101.600	0.955 24.257	41.00 7.175	2.100 53.340	86.000 382.528	1.500 38.10	0.135 3.43	11.10	MW	CG N
1.225	31.115	72703S	4.00 101.600	0.955 24.257	34.00 5.950	1.600 40.640	55.000 244.640	1.500 38.10	0.135 3.43	11.10	SST	CG N
1.225	31.115	72718	4.00 101.600	0.929 23.597	51.00 8.925	2.100 53.340	108.000 480.384	1.890 48.01	0.148 3.76	12.80	MW	CG N
1.225	31.115	72718S	4.00 101.600	0.929 23.597	44.00 7.700	1.700 43.180	73.000 324.704	1.890 48.01	0.148 3.76	12.80	SST	CG N
1.225	31.115	72726	4.00 101.600	0.913 23.190	68.00 11.900	1.900 48.260	128.000 569.344	1.910 48.51	0.156 3.96	12.30	MW	CG N
1.225	31.115	72726S	4.00 101.600	0.913 23.190	58.00 10.150	1.400 35.560	81.000 360.288	1.910 48.51	0.156 3.96	12.30	SST	CG N
1.225	31.115	72737	4.00 101.600	0.901 22.885	78.00 13.650	1.800 45.720	143.000 636.064	2.050 52.07	0.162 4.11	12.60	MW	CG N
1.225	31.115	72737S	4.00 101.600	0.901 22.885	66.00 11.550	1.400 35.560	91.000 404.768	2.050 52.07	0.162 4.11	12.60	SST	CG N
1.225	31.115	72748	4.00 101.600	0.871 22.123	111.00 19.425	1.700 43.180	185.000 822.880	2.300 58.42	0.177 4.50	13.00	MW	CG N
1.225	31.115	72748S	4.00 101.600	0.871 22.123	94.00 16.450	1.200 30.480	118.000 524.864	2.300 58.42	0.177 4.50	13.00	SST	CG N
1.225	31.115	72756	4.00 101.600	0.841 21.361	159.00 27.825	1.400 35.560	226.000 1005.248	2.520 64.01	0.192 4.88	13.10	MW	CG N
1.225	31.115	72756S	4.00 101.600	0.841 21.361	135.00 23.625	1.000 25.400	138.000 613.824	2.520 64.01	0.192 4.88	13.10	SST	CG N
1.225	31.115	72763	4.00 101.600	0.811 20.599	223.00 39.025	1.300 33.020	281.000 1249.888	2.740 69.60	0.207 5.26	13.30	MW	CG N
1.225	31.115	72763S	4.00 101.600	0.811 20.599	190.00 33.250	0.900 22.860	171.000 760.608	2.740 69.60	0.207 5.26	13.30	SST	CG N
1.225	31.115	72635	4.50 114.300	1.055 26.797	6.00 1.050	3.600 91.440	22.000 97.856	0.890 22.61	0.085 2.16	10.50	MW	CG N
1.225	31.115	72635S	4.50 114.300	1.055 26.797	5.10 0.893	3.200 81.280	16.000 71.168	0.890 22.61	0.085 2.16	10.50	SST	CG N
1.225	31.115	72649S	4.50 114.300	1.033 26.238	8.10 1.418	2.677 67.996	22.000 97.856	1.018 25.86	0.095 2.41	10.70	SST	CG N
1.225	31.115	72649	4.50 114.300	1.033 26.238	9.50 1.663	3.500 88.900	33.000 146.784	1.040 26.42	0.096 2.44	10.90	MW	CG N
1.225	31.115	72662	4.50 114.300	1.015 25.781	13.00 2.275	3.300 83.820	42.000 186.816	1.230 31.24	0.105 2.67	11.80	MW	CG N
1.225	31.115	72662S	4.50 114.300	1.015 25.781	11.00 1.925	2.700 68.580	29.000 128.992	1.230 31.24	0.105 2.67	11.80	SST	CG N
1.225	31.115	72676	4.50 114.300	1.001 25.425	18.00 3.150	2.800 71.120	51.000 226.848	1.230 31.24	0.112 2.84	11.00	MW	CG N
1.225	31.115	72676S	4.50 114.300	1.001 25.425	15.00 2.625	2.200 55.880	33.000 146.784	1.230 31.24	0.112 2.84	11.00	SST	CG N
1.225	31.115	72691	4.50 114.300	0.975 24.765	24.00 4.200	2.900 73.660	68.000 302.464	1.640 41.66	0.125 3.18	13.10	MW	CG N
1.225	31.115	72691S	4.50 114.300	0.975 24.765	20.00 3.500	2.300 58.420	46.000 204.608	1.640 41.66	0.125 3.18	13.10	SST	CG N
1.225	31.115	72705	4.50 114.300	0.955 24.257	32.00 5.600	2.700 68.580	86.000 382.528	1.810 45.97	0.135 3.43	13.40	MW	CG N
1.225	31.115	72705S	4.50 114.300	0.955 24.257	27.00 4.725	2.000 50.800	55.000 244.640	1.810 45.97	0.135 3.43	13.40	SST	CG N
1.225	31.115	72719	4.50 114.300	0.929 23.597	45.00 7.875	2.400 60.960	108.000 480.384	2.110 53.59	0.148 3.76	14.30	MW	CG N
1.225	31.115	72719S	4.50 114.300	0.929 23.597	38.00 6.650	1.900 48.260	73.000 324.704	2.110 53.59	0.148 3.76	14.30	SST	CG N
1.225	31.115	72727	4.50 114.300	0.913 23.190	60.00 10.500	2.100 53.340	128.000 569.344	2.130 54.10	0.156 3.96	13.60	MW	CG N
1.225	31.115	72727S	4.50 114.300	0.913 23.190	51.00 8.925	1.600 40.640	81.000 360.288	2.130 54.10	0.156 3.96	13.60	SST	CG N
1.225	31.115	72738	4.50 114.300	0.901 22.885	69.00 12.075	2.100 53.340	143.000 636.064	2.270 57.66	0.162 4.11	14.00	MW	CG N
1.225	31.115	72738S	4.50 114.300	0.901 22.885	58.00 10.150	1.600 40.640	91.000 404.768	2.270 57.66	0.162 4.11	14.00	SST	CG N
1.225	31.115	72749	4.50 114.300	0.871 22.123	98.00 17.150	1.900 48.260	185.000 822.880	2.570 65.28	0.177 4.50	14.50	MW	CG N
1.225	31.115	72749S	4.50 114.300	0.871 22.123	83.00 14.525	1.400 35.560	118.000 524.864	2.570 65.28	0.177 4.50	14.50	SST	CG N
1.225	31.115	72757	4.50 114.300	0.841 21.361	140.00 24.500	1.600 40.640	226.000 1005.248	2.810 71.37	0.192 4.88	14.60	MW	CG N
1.225	31.115	72757S	4.50 114.300	0.841 21.361	119.00 20.825	1.200 30.480	138.000 613.824	2.810 71.37	0.192 4.88	14.60	SST	CG N
1.225	31.115	72764	4.50 114.300	0.811 20.599	196.00 34.300	1.400 35.560	281.000 1249.888	3.050 77.47	0.207 5.26	14.80	MW	CG N
1.225	31.115	72764S	4.50 114.300	0.811 20.599	167.00 29.225	1.000 25.400	171.000 760.608	3.050 77.47	0.207 5.26	14.80	SST	CG N
1.225	31.115	72636	5.00 127.000	1.055 26.797	5.30 0.928	4.000 101.600	21.000 93.408	0.980 24.89	0.085 2.16	11.50	MW	CG N
1.225	31.115	72636S	5.00 127.000	1.055 26.797	4.50 0.788	3.600 91.440	16.000 71.168	0.980 24.89	0.085 2.16	11.50	SST	CG N
1.225	31.115	72650S	5.00 127.000	1.033 26.238	7.20 1.260	3.011 76.479	22.000 97.856	1.121 28.47	0.095 2.41	11.80	SST	CG N
1.225	31.115	72650	5.00 127.000	1.033 26.238	8.50 1.488	3.800 96.520	33.000 146.784	1.150 29.21	0.096 2.44	12.00	MW	CG N
1.225	31.115	72663	5.00 127.000	1.015 25.781	12.00 2.100	3.600 91.440	42.000 186.816	1.350 34.29	0.105 2.67	12.90	MW	CG N
1.225	31.115	72663S	5.00 127.000	1.015 25.781	9.80 1.715	3.000 76.200	29.000 128.992	1.350 34.29	0.105 2.67	12.90	SST	CG N
1.225	31.115	72678	5.00 127.000	1.001 25.425	16.00 2.800	3.100 78.740	51.000 226.848	1.360 34.54	0.112 2.84	12.10	MW	CG N
1.225	31.115	72678S	5.00 127.000	1.001 25.425	14.00 2.450	2.400 60.960	33.000 146.784	1.360 34.54	0.112 2.84	12.10	SST	CG N
1.225	31.115	72692	5.00 127.000	0.975 24.765	21.00 3.675	3.200 81.280	68.000 302.464	1.810 45.97	0.125 3.18	14.50	MW	CG N
1.225	31.115	72692S	5.00 127.000	0.975 24.765	19.00 3.400	2.600 66.040	46.000 204.608	1.810 45.97	0.125 3.18	14.50	SST	CG N
1.225	31.115	72707	5.00 127.000	0.955 24.257	29.00 5.075	3.000 76.200	86.000 382.528	1.990 50.55	0.135 3.43	14.80	MW	CG N
1.225	31.115	72707S	5.00 127.000	0.955 24.257	25.00 4.375	2.300 58.420	55.000 244.640	1.990 50.55	0.135 3.43	14.80	SST	CG N
1.225	31.115	72720	5.00 127.000	0.929 23.597	40.00 7.000	2.700 68.580	108.000 480.384	2.330 59.18	0.148 3.76	15.80	MW	CG N
1.225	31.115	72720S	5.00 127.000	0.929 23.597	34.00 5.950	2.100 53.340	73.000 324.704	2.330 59.18	0.148 3.76	15.80	SST	CG N
1.225	31.115	72728	5.00 127.000	0.913 23.190	53.00 9.275	2.400 60.960	128.000 569.344	2.360 59.94	0.156 3.96	15.10	MW	CG N
1.225	31.115	72728S	5.00 127.000	0.913 23.190	45.00 7.875	1.800 45.720	81.000 360.288	2.360 59.94	0.156 3.96	15.10	SST	CG N
1.225	31.115	72739	5.00 127.000	0.901 22.885	61.00 10.675	2.300 58.420	143.000 636.064	2.490 63.25	0.162 4.11	15.40	MW	CG N
1.225	31.115	72739S	5.00 127.000	0.901 22.885	52.00 9.100	1.700 43.180	91.000 404.768	2.490 63.25	0.162 4.11	15.40	SST	CG N
1.225	31.115	72750	5.00 127.000	0.871 22.123	87.00 15.225	2.100 53.340	185.000 822.880	2.850 72.39	0.177 4.50	16.10	MW	CG N
1.225	31.115	72750S	5.00 127.000	0.871 22.123	74.00 12.950	1.600 40.640	118.000 524.864	2.850 72.39	0.177 4.50	16.10	SST	CG N
1.225	31.115	72758	5.00 127.000	0.841 21.361</								




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
1.234	31.344	10499	1.41	35.814	1.040	26.416	58.00	10.150	0.420	10.668	24.000	106.752	0.340	8.64	0.097	2.46	3.50	SPR CG Z
1.234	31.344	10913	1.44	36.576	1.122	28.499	1.60	0.280	1.100	27.940	1.800	8.006	0.370	9.40	0.056	1.42	6.67	SST CG N
1.234	31.344	3202	1.50	38.100	1.080	27.432	8.70	1.523	1.100	27.940	9.200	40.922	0.440	11.18	0.077	1.96	5.75	SPR CG Z
1.234	31.344	3430	1.63	41.402	1.050	26.670	28.00	4.900	0.760	19.304	21.000	93.408	0.410	10.41	0.092	2.34	4.50	SPR CG Z
1.234	31.344	2663	1.63	41.402	0.910	23.114	268.00	46.900	0.380	9.652	102.000	453.696	0.810	20.57	0.162	4.11	5.00	SPR CG Z
1.234	31.344	S-338	1.75	44.450	1.110	28.194	2.30	0.403	1.303	33.096	3.000	13.344	0.447	11.35	0.063	1.59	7.20	SST CG N
1.234	31.344	S-1677	1.75	44.450	1.026	26.060	26.00	4.550	1.087	27.610	28.000	124.544	0.636	16.15	0.105	2.67	6.10	SST CG N
1.234	31.344	S-963	1.81	45.974	1.066	27.076	20.00	3.500	0.794	20.168	15.900	70.723	0.353	8.97	0.085	2.16	4.20	SST CG N
1.234	31.344	EE-88	2.00	50.800	0.710	18.034	2132.00	373.100	0.245	6.223	524.000	2330.752	1.430	36.32	0.262	6.65	5.50	MW CG Z
1.234	31.344	2641	2.34	59.436	1.024	26.010	24.00	4.200	1.500	38.100	36.000	160.128	0.840	21.34	0.105	2.67	7.00	MW C Z
1.234	31.344	PP-44	2.69	68.326	1.134	28.804	0.40	0.070	1.900	48.260	0.750	3.336	0.830	21.08	0.050	1.27	15.50	SPR C Z
1.234	31.344	10578	2.75	69.850	1.024	26.010	20.00	3.500	1.500	38.100	31.000	137.888	0.840	21.34	0.105	2.67	8.00	SPR CG Z
1.234	31.344	1759	2.78	70.612	1.064	27.026	11.00	1.925	1.500	38.100	17.000	75.616	0.500	12.70	0.085	2.16	6.00	SPR CG Z
1.234	31.344	S-3061	3.13	79.502	1.062	26.975	10.00	1.750	1.700	43.180	17.000	75.616	0.650	16.51	0.086	2.18	6.50	SST C N
1.234	31.344	11787	3.16	80.264	0.852	21.641	211.00	36.925	0.740	18.796	156.000	693.888	1.910	48.51	0.191	4.85	10.00	SPR CG Z
1.234	31.344	3465	3.50	88.900	0.794	20.168	359.00	62.825	0.630	16.002	226.000	1005.248	2.420	61.47	0.220	5.59	11.00	SPR CG Z
1.234	31.344	S-458	3.63	92.202	1.110	28.194	0.96	0.168	2.733	69.418	2.600	11.565	0.897	22.78	0.063	1.59	14.40	SST CG N
1.234	31.344	2724	4.00	101.600	0.994	25.248	21.00	3.675	2.100	53.340	44.000	195.712	1.590	40.39	0.120	3.05	12.30	HD C Z
1.234	31.344	2768	4.19	106.426	0.964	24.486	36.00	6.300	1.700	43.180	61.000	271.328	1.620	41.15	0.135	3.43	12.00	SPR CG Z
1.234	31.344	397	5.44	138.176	0.880	22.352	94.00	16.450	1.400	35.560	131.000	582.688	2.610	66.29	0.177	4.50	14.80	SPR CG Z
1.234	31.344	10341	6.00	152.400	0.820	20.828	174.00	30.450	1.100	27.940	197.000	876.256	3.310	84.07	0.207	5.26	16.00	SPR CG Z
1.25	31.750	BB-44	0.50	12.700	1.176	29.870	1.30	0.228	0.350	8.890	0.460	2.046	0.150	3.81	0.037	0.94	3.00	SST C N
1.25	31.750	10830	0.50	12.700	1.070	27.178	54.00	9.450	0.230	5.842	12.000	53.376	0.270	6.86	0.090	2.29	3.00	SST CG N
1.25	31.750	2891	0.63	16.002	1.126	28.600	5.30	0.928	0.350	8.890	1.900	8.451	0.270	6.86	0.062	1.57	4.33	SPR CG Z
1.25	31.750	10971	0.75	19.050	1.060	26.924	67.00	11.725	0.310	7.874	21.000	93.408	0.290	7.37	0.095	2.41	3.00	SST CG N
1.25	31.750	12207	0.75	19.050	1.050	26.670	47.00	8.225	0.350	8.890	17.000	75.616	0.400	10.16	0.100	2.54	4.00	SPR CG Z
1.25	31.750	3963	0.75	19.050	1.046	26.568	118.00	20.650	0.240	6.096	28.000	124.544	0.290	7.37	0.102	2.59	3.00	SPR CG Z
1.25	31.750	2887	0.94	23.876	1.130	28.702	7.40	1.295	0.730	18.542	5.400	24.019	0.210	5.33	0.060	1.52	3.50	SPR CG Z
1.25	31.750	S-3158	1.13	28.702	1.068	27.127	20.00	3.500	0.690	17.526	14.000	62.272	0.430	10.92	0.091	2.31	4.75	SST CG N
1.25	31.750	S-148	1.25	31.750	1.126	28.600	5.50	0.963	0.933	23.698	5.100	22.685	0.317	8.05	0.063	1.59	4.10	SST C N
1.25	31.750	829	1.25	31.750	1.010	25.654	89.00	15.575	0.500	12.700	44.000	195.712	0.640	16.26	0.120	3.05	4.33	HD C Z
1.25	31.750	S-1436	1.31	33.274	1.040	26.416	40.00	7.000	0.700	17.780	28.000	124.544	0.470	11.94	0.105	2.67	4.50	SST CG N
1.25	31.750	3044	1.34	34.036	1.106	28.092	7.90	1.383	0.980	24.892	7.700	34.250	0.360	9.14	0.072	1.83	5.00	SPR CG Z
1.25	31.750	S-475	1.38	35.052	0.896	22.758	331.00	57.925	0.350	8.890	115.000	511.520	0.890	22.61	0.177	4.50	5.00	SST CG N
1.25	31.750	807	1.63	41.402	0.866	21.996	412.00	72.100	0.380	9.652	157.000	698.336	1.150	29.21	0.192	4.88	6.00	HD CG Z
1.25	31.750	B18-196	1.72	43.688	0.982	24.943	74.00	12.950	0.741	18.821	55.000	244.640	0.816	20.73	0.135	3.43	6.00	SST CG N
1.25	31.750	B17-153	1.75	44.450	1.164	29.566	0.13	0.023	0.800	20.320	0.100	0.445	0.950	24.13	0.043	1.09	21.00	SST C N
1.25	31.750	I-60A	1.75	44.450	1.126	28.600	1.80	0.315	1.100	27.940	2.000	8.896	0.620	15.75	0.062	1.57	9.00	HD C BO
1.25	31.750	11708	1.75	44.450	0.892	22.657	400.00	70.000	0.340	8.636	134.000	596.032	0.900	22.86	0.179	4.55	5.00	SPR CG Z
1.25	31.750	3455	1.75	44.450	0.890	22.606	308.00	53.900	0.420	10.668	130.000	578.240	1.080	27.43	0.180	4.57	6.00	SPR CG Z
1.25	31.750	2936	1.78	45.212	1.116	28.346	5.80	1.015	1.400	35.560	8.400	37.363	0.340	8.64	0.067	1.70	5.00	SPR CG Z
1.25	31.750	1901	2.00	50.800	1.040	26.416	23.00	4.025	1.300	33.020	29.000	128.992	0.740	18.80	0.105	2.67	7.00	SPR CG Z
1.25	31.750	S-3247	2.03	51.562	1.130	28.702	1.20	0.210	1.400	35.560	1.800	8.006	0.600	15.24	0.060	1.52	10.00	SST CG N
1.25	31.750	12608	2.25	57.150	1.116	28.346	4.10	0.718	1.800	45.720	7.500	33.360	0.420	10.67	0.067	1.70	6.25	MW CG Z
1.25	31.750	11298	2.28	57.912	0.910	23.114	224.00	39.200	0.520	13.208	116.000	515.968	1.060	26.92	0.170	4.32	6.25	SPR CG Z
1.25	31.750	10995	2.31	58.674	0.954	24.232	86.00	15.050	0.920	23.368	79.000	351.392	1.180	29.97	0.148	3.76	8.00	HD CG Z
1.25	31.750	11848	2.34	59.436	1.102	27.991	5.90	1.033	1.800	45.720	11.000	48.928	0.440	11.18	0.074	1.88	6.00	SST CG N
1.25	31.750	10644	2.38	60.452	0.866	21.996	275.00	48.125	0.570	14.478	157.000	698.336	1.540	39.12	0.192	4.88	8.00	SPR CG Z
1.25	31.750	11917	2.50	63.500	1.068	27.127	11.00	1.925	1.700	43.180	19.000	84.512	0.640	16.26	0.091	2.31	7.00	SST CG N
1.25	31.750	72	2.50	63.500	0.896	22.758	169.00	29.575	0.770	19.558	130.000	578.240	1.550	39.37	0.177	4.50	8.75	HD CG Z
1.25	31.750	12097	2.56	65.024	1.068	27.127	11.00	1.925	1.700	43.180	19.000	84.512	0.640	16.26	0.091	2.31	7.00	SST CG N
1.25	31.750	S-352	2.63	66.802	1.138	28.905	2.20	0.385	2.200	55.880	4.900	21.795	0.350	8.89	0.056	1.42	5.25	SST C N
1.25	31.750	272	2.88	73.152	0.980	24.892	49.00	8.575	1.200	30.480	60.000	266.880	1.220	30.99	0.135	3.43	9.00	HD CG Z
1.25	31.750	3085	2.94	74.676	1.122	28.499	3.30	0.578	2.300	58.420	7.700	34.250	0.470	11.94	0.064	1.63	6.33	SPR C Z
1.25	31.750	10710	3.00	76.200	0.980	24.892	31.00	5.425	1.200	30.480	39.000	173.472	1.760	44.70	0			




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
1.25	31.750	S-959	6.88	174.752	0.956	24.282	22.00	3.850	3.181	80.797	70,000	311.360	3.311	84.10	0.148	3.76	22.40	SST	CG	N
1.25	31.750	3210	7.00	177.800	0.926	23.520	57.00	9.975	1.800	45.720	100,000	444.800	2.510	63.75	0.162	4.11	15.50	SPR	CG	Z
1.25	31.750	2725	7.63	193.802	0.954	24.232	26.00	4.550	3.000	76.200	79,000	351.392	3.180	80.77	0.148	3.76	21.50	SPR	C	Z
1.25	31.750	12648	8.00	203.200	1.066	27.076	12.00	2.100	1.700	43.180	21,000	93.408	0.780	19.81	0.092	2.34	7.50	SPR	C	Z
1.25	31.750	12658	8.00	203.200	1.062	26.975	4.60	0.805	6.200	157.480	29,000	128.992	1.760	44.70	0.094	2.39	17.80	MW	C	Z
1.25	31.750	4181	8.00	203.200	1.010	25.654	9.80	1.715	4.500	114.300	44,000	195.712	2.880	73.15	0.120	3.05	23.00	SPR	C	Z
1.25	31.750	849	8.00	203.200	0.926	23.520	32.00	5.600	3.100	78.740	100,000	444.800	4.210	106.93	0.162	4.11	26.00	HD	CG	Z
1.25	31.750	2996	8.38	212.852	1.022	25.959	7.30	1.278	5.200	132.080	38,000	169.024	2.820	71.63	0.114	2.90	24.80	SPR	CG	Z
1.25	31.750	822	10.00	254.000	0.954	24.232	18.00	3.150	4.300	109.220	79,000	351.392	4.480	113.79	0.148	3.76	30.30	HD	CG	Z
1.25	31.750	3460	11.80	299.720	1.066	27.076	2.80	0.490	7.500	190.500	21,000	93.408	2.480	62.99	0.092	2.34	26.00	HD	C	GI
1.25	31.750	868	12.00	304.800	1.010	25.654	6.70	1.173	6.600	167.640	44,000	195.712	4.080	103.63	0.120	3.05	33.00	HD	C	Z
1.25	31.750	860	12.00	304.800	0.980	24.892	11.00	1.925	5.700	144.780	60,000	266.880	4.830	122.68	0.135	3.43	34.80	HD	C	Z
1.25	31.750	839	12.00	304.800	0.866	21.996	55.00	9.625	2.900	73.660	157,000	698.336	6.140	155.96	0.192	4.88	32.00	HD	CG	Z
1.25	31.750	802	12.00	304.800	0.836	21.234	67.00	11.725	2.900	73.660	195,000	867.360	7.560	192.02	0.207	5.26	36.50	HD	CG	Z
1.25	31.750	834	12.00	304.800	0.800	20.320	93.00	16.275	2.600	66.040	239,000	1063.072	8.720	221.49	0.225	5.72	38.80	HD	CG	Z
1.25	31.750	S-3047	16.00	406.400	1.070	27.178	1.50	0.263	12,000	304.800	18,000	80.064	3.510	89.15	0.090	2.29	38.00	SST	C	N
1.25	31.750	4000	19.00	482.600	1.000	25.400	5.90	1.033	8,400	213.360	50,000	222.400	5.500	139.70	0.125	3.18	44.00	SPR	CG	Z
1.25	31.750	4045	24.80	629.920	0.750	19.050	97.00	16.975	3,300	83.820	322,000	1432.256	15,000	381.00	0.250	6.35	60.00	SPR	CG	Z
1.266	32.156	S-3199	0.75	19.050	1.124	28.550	19.00	3.325	0.490	12.446	9,200	40.922	0.210	5.33	0.071	1.80	3.00	SST	CG	N
1.266	32.156	2957	1.41	35.814	1.056	26.822	45.00	7.875	0.680	17.272	30,000	133.440	0.470	11.94	0.105	2.67	4.50	SPR	CG	Z
1.266	32.156	10292	1.44	36.576	1.094	27.788	19.00	3.325	0.910	23.114	17,000	75.616	0.390	9.91	0.086	2.18	4.50	SPR	CG	Z
1.266	32.156	11212	1.53	38.862	0.926	23.520	304.00	53.200	0.380	9.652	114,000	507.072	0.850	21.59	0.170	4.32	5.00	SPR	CG	Z
1.266	32.156	11210	1.63	41.402	0.970	24.638	165.00	28.875	0.470	11.938	78,000	346.944	0.890	22.61	0.148	3.76	5.00	SPR	C	Z
1.266	32.156	2600	1.75	44.450	1.056	26.822	41.00	7.175	1.000	25.400	42,000	186.816	0.500	12.70	0.105	2.67	4.75	MW	CG	Z
1.266	32.156	11796	1.97	50.038	1.164	29.566	1.10	0.193	1.600	40.640	1,700	7.562	0.330	8.38	0.051	1.30	6.50	SST	CG	N
1.266	32.156	B18-186	2.03	51.562	0.766	19.456	1357.00	237.475	0.200	5.080	268,000	1192.064	1.380	35.05	0.250	6.35	5.50	SST	CG	N
1.266	32.156	11857	2.47	62.738	1.128	28.651	6.30	1.103	1.500	38.100	9,500	42.256	0.350	8.89	0.069	1.75	5.00	SPR	CG	N
1.266	32.156	S-348	2.75	69.850	1.016	25.806	37.00	6.475	1.200	30.480	45,000	200.160	0.940	23.88	0.125	3.18	7.50	SST	CG	N
1.266	32.156	10169	2.75	69.850	0.912	23.165	156.00	27.300	0.820	20.828	128,000	569.344	1.590	40.39	0.177	4.50	9.00	SPR	CG	Z
1.266	32.156	11700	3.09	78.486	1.182	30.023	0.81	0.142	2.800	71.120	2,300	10.230	0.250	6.35	0.042	1.07	5.00	SPR	C	Z
1.266	32.156	11788	3.31	84.074	1.054	26.772	17.00	2.975	1.900	48.260	31,000	137.888	0.950	24.13	0.106	2.69	9.00	SPR	CG	Z
1.266	32.156	S-335	4.00	101.600	0.882	22.403	224.00	39.200	0.600	15.240	134,000	596.032	1.560	39.62	0.192	4.88	8.00	SST	CG	N
1.266	32.156	10515	4.13	104.902	1.056	26.822	9.70	1.698	2.700	68.580	26,000	115.648	1.420	36.07	0.105	2.67	13.50	SPR	CG	Z
1.266	32.156	12512	4.19	106.426	0.922	23.419	120.00	21.000	1.344	34.138	161,000	716.128	1.847	46.91	0.171	4.34	10.00	MW	C	N
1.266	32.156	S-1128	4.25	107.950	1.142	29.007	1.10	0.193	3.441	87.401	3,800	16.902	0.809	20.55	0.063	1.59	11.90	SST	C	N
1.266	32.156	11903	5.09	129.286	1.144	29.058	0.63	0.110	3.900	99.060	2,500	11.120	1.160	29.46	0.061	1.55	18.00	SST	C	N
1.266	32.156	2712	6.00	152.400	0.954	24.232	37.00	6.475	2.400	60.960	89,000	395.872	3.160	80.26	0.156	3.96	20.00	SPR	CG	Z
1.266	32.156	11562	7.25	184.150	1.028	26.111	12.00	2.100	3.700	93.980	42,000	186.816	2.320	58.93	0.119	3.02	18.50	SPR	CG	GI
1.266	32.156	3283	8.00	203.200	1.026	26.060	9.40	1.645	4.600	116.840	43,000	191.264	2.880	73.15	0.120	3.05	23.00	HD	CG	Z
1.266	32.156	4164	8.25	209.550	0.906	23.012	51.00	8.925	2.500	63.500	129,000	573.792	4.500	114.30	0.180	4.57	25.00	SPR	CG	Z
1.266	32.156	3377	9.38	238.252	1.052	26.721	5.50	0.963	5.800	147.320	32,000	142.336	2.680	68.07	0.107	2.72	24.00	SPR	C	Z
1.281	32.537	B8-59	0.59	14.986	1.125	28.575	11.00	1.925	0.240	6.096	2,600	11.565	0.350	8.89	0.078	1.98	4.50	SST	CG	N
1.281	32.537	3620	0.69	17.526	1.157	29.388	3.90	0.683	0.380	9.652	1,500	6.672	0.310	7.87	0.062	1.57	5.00	SPR	CG	Z
1.281	32.537	S-1683	0.95	24.130	0.997	25.324	229.00	40.075	0.270	6.858	62,000	275.776	0.500	12.70	0.142	3.61	3.50	SST	CG	N
1.281	32.537	S-3031	1.00	25.400	1.099	27.915	20.00	3.500	0.590	14.986	12,000	53.376	0.410	10.41	0.091	2.31	4.50	SST	CG	N
1.281	32.537	S-291	1.13	28.702	1.157	29.388	5.10	0.893	0.876	22.250	4,500	20.016	0.254	6.45	0.063	1.59	4.10	SST	CG	N
1.281	32.537	A14-50	1.28	32.512	1.119	28.423	14.00	2.450	0.924	23.470	12,900	57.379	0.356	9.04	0.082	2.08	4.30	SST	CG	N
1.281	32.537	10459	1.50	38.100	1.111	28.219	15.00	2.625	1.200	27.940	16,000	71.168	0.430	10.92	0.085	2.16	5.00	SPR	CG	Z
1.281	32.537	11668	1.50	38.100	1.001	25.425	124.00	21.700	0.530	13.462	66,000	293.568	0.700	17.78	0.140	3.56	5.00	SPR	CG	GI
1.281	32.537	11187	1.56	39.624	1.071	27.203	36.00	6.300	0.830	21.082	30,000	133.440	0.530	13.46	0.105	2.67	5.00	HD	CG	Z
1.281	32.537	3041	1.75	44.450	1.157	29.388	2.90	0.508	1.300	33.020	3,900	17.347	0.430	10.92	0.062	1.57	6.00	SPR	C	Z
1.281	32.537	11944	1.75	44.450	1.115	28.321	13.00	2.275	1.200	30.480	15,000	66.720	0.420	10.67	0.083</td					




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
1.296	32.918	3744	2.94 74.676	1.096 27.838	17.00 2.975	1.500 38.100	26.000 115.648	0.700 17.78	0.100 2.54	7.00	SPR CG	Z
1.296	32.918	S-3017	3.00 76.200	1.172 29.769	1.40 0.245	2.359 59.919	3.300 14.678	0.641 16.28	0.063 1.59	9.30	SST CG	N
1.296	32.918	11265	3.00 76.200	0.972 24.689	97.00 16.975	1.000 25.400	97.000 431.456	1.460 37.08	0.162 4.11	9.00	SPR CG	N
1.296	32.918	2828	3.75 95.250	0.796 20.218	497.00 86.975	0.630 16.002	312.000 1387.776	2.970 75.44	0.250 6.35	12.00	SPR CG	Z
1.296	32.918	S-160	4.50 114.300	1.112 28.245	5.40 0.945	3.400 86.360	18.000 80.064	1.150 29.21	0.092 2.34	11.50	SST C	N
1.296	32.918	12128	4.94 125.476	1.188 30.175	0.80 0.140	4.300 109.220	3.500 15.568	0.590 14.99	0.054 1.37	10.00	SPR C	Z
1.296	32.918	11734	4.94 125.476	1.008 25.603	35.00 6.125	2.000 50.800	70.000 311.360	1.940 49.28	0.144 3.66	13.50	SPR CG	Z
1.296	32.918	S-1657	6.00 152.400	1.156 29.362	1.70 0.298	5.200 132.080	8.600 38.253	0.840 21.34	0.070 1.78	12.00	SST CG	N
1.296	32.918	4133	6.75 171.450	0.992 25.197	39.00 6.825	2.000 50.800	81.000 360.288	2.280 57.91	0.152 3.86	15.00	SPR CG	GI
1.296	32.918	4025	22.00 558.800	1.046 26.568	3.40 0.595	13.000 330.200	44.000 195.712	7.310 185.67	0.125 3.18	58.50	SST CG	N
1.312	33.325	S-1499	0.94 23.876	1.188 30.175	2.70 0.473	0.589 14.961	1.600 7.117	0.349 8.86	0.063 1.59	5.60	SST CG	N
1.312	33.325	3325	1.19 30.226	1.072 27.229	88.00 15.400	0.480 12.192	42.000 186.816	0.480 12.19	0.120 3.05	4.00	SPR CG	Z
1.312	33.325	S-198	1.22 30.988	1.102 27.991	44.00 7.700	0.610 15.494	27.000 120.096	0.420 10.67	0.105 2.67	4.00	SST CG	N
1.312	33.325	S-1275	1.38 35.052	1.112 28.245	20.00 3.500	0.830 21.082	17.000 75.616	0.550 13.97	0.100 2.54	5.50	SST CG	N
1.312	33.325	S-3223	1.44 36.576	1.152 29.261	14.00 2.450	0.910 23.114	13.000 57.824	0.320 8.13	0.080 2.03	4.00	SST CG	N
1.312	33.325	10670	1.81 45.974	1.102 27.991	29.00 5.075	0.920 23.368	27.000 120.096	0.530 13.46	0.105 2.67	5.00	SST CG	Z
1.312	33.325	271	1.88 47.752	0.988 25.095	145.00 25.375	0.660 16.764	96.000 427.008	1.050 26.67	0.162 4.11	6.50	HD CG	Z
1.312	33.325	12127	1.91 48.514	1.050 26.670	86.00 15.050	0.620 15.748	53.000 235.744	0.660 16.76	0.131 3.33	5.00	SPR CG	Z
1.312	33.325	10505	1.94 49.276	1.126 28.600	17.00 2.975	1.200 30.480	20.000 88.960	0.510 12.95	0.093 2.36	5.50	SPR CG	Z
1.312	33.325	3021	1.94 49.276	1.102 27.991	25.00 4.375	1.200 30.480	29.000 128.992	0.630 16.00	0.105 2.67	6.00	SPR CG	Z
1.312	33.325	11986	2.09 53.086	0.897 22.784	396.00 69.300	0.480 12.192	188.000 836.224	1.450 36.83	0.208 5.28	7.00	SPR CG	Z
1.312	33.325	S-1422	2.38 60.452	1.152 29.261	7.30 1.278	1.700 43.180	13.000 57.824	0.540 13.72	0.080 2.03	5.75	SST C	N
1.312	33.325	S-3170	2.50 63.500	1.136 28.854	5.80 1.015	1.700 43.180	10.000 44.480	0.790 20.07	0.088 2.24	9.00	SST CG	N
1.312	33.325	3169	2.63 66.802	0.986 25.044	103.00 18.025	0.950 24.130	98.000 435.904	1.390 35.31	0.163 4.14	8.50	SPR CG	Z
1.312	33.325	1877	2.88 73.152	1.116 28.346	21.00 3.675	1.600 40.640	33.000 146.784	0.640 16.26	0.098 2.49	5.50	MW CG	Z
1.312	33.325	2988	2.94 74.676	1.062 26.975	35.00 6.125	1.400 35.560	47.000 209.056	1.080 27.43	0.125 3.18	8.50	SPR CG	Z
1.312	33.325	10109	3.25 82.550	1.192 30.277	2.70 0.473	2.200 55.880	6.100 27.133	0.390 9.91	0.060 1.52	5.50	SPR C	Z
1.312	33.325	3397	3.50 88.900	1.172 29.769	4.50 0.788	2.000 50.800	9.100 40.477	0.490 12.45	0.070 1.78	6.00	SPR C	Z
1.312	33.325	S-1628	3.53 89.662	1.170 29.718	1.80 0.315	2.700 68.580	4.800 21.350	0.820 20.83	0.071 1.80	11.50	SST CG	N
1.312	33.325	10044	3.63 92.202	0.862 21.895	319.00 55.825	0.720 18.288	229.000 1018.592	2.480 62.99	0.225 5.72	11.00	SPR CG	Z
1.312	33.325	4361	4.00 101.600	1.102 27.991	11.00 1.925	2.600 66.040	29.000 128.992	1.130 28.70	0.105 2.67	10.80	SPR CG	Z
1.312	33.325	11434	4.00 101.600	0.938 23.825	154.00 26.950	0.900 22.860	139.000 618.272	1.870 47.50	0.187 4.75	10.00	SPR CG	Z
1.312	33.325	2749	4.69 119.126	0.788 20.015	600.00 105.000	0.570 14.478	341.000 1516.768	3.080 78.23	0.262 6.65	11.80	SPR CG	Z
1.312	33.325	12144	4.75 120.650	1.010 25.654	33.00 5.775	2.300 58.420	74.000 329.152	2.490 63.25	0.151 3.84	16.50	SPR CG	Z
1.312	33.325	12012	4.94 125.476	1.204 30.582	0.77 0.135	4.300 109.220	3.300 14.678	0.590 14.99	0.054 1.37	10.00	SPR C	Z
1.312	33.325	3048	5.25 133.350	1.042 26.467	24.00 4.200	2.400 60.960	58.000 257.984	1.890 48.01	0.135 3.43	14.00	SPR CG	Z
1.312	33.325	12108	5.41 137.414	1.094 27.788	12.00 2.100	2.700 68.580	33.000 146.784	1.250 31.75	0.109 2.77	11.50	SPR CG	GI
1.312	33.325	S-456	5.63 143.002	1.092 27.737	7.80 1.365	3.800 96.520	30.000 133.440	1.710 43.43	0.110 2.79	15.50	SST CG	N
1.312	33.325	10399	6.00 152.400	1.086 27.584	10.00 1.750	3.500 88.900	35.000 155.680	1.750 44.45	0.113 2.87	15.50	SPR CG	Z
1.312	33.325	336	6.00 152.400	0.958 24.333	57.00 9.975	2.200 55.880	124.000 551.552	3.360 85.34	0.177 4.50	19.00	HD CG	Z
1.312	33.325	10410	6.00 152.400	0.874 22.200	188.00 32.900	1.200 30.480	220.000 978.560	3.390 86.11	0.219 5.56	15.50	SPR CG	Z
1.312	33.325	1921	7.75 196.850	0.936 23.774	70.00 12.250	2.000 50.800	141.000 627.168	3.760 95.50	0.188 4.78	20.00	HD CG	Z
1.312	33.325	S-1416	8.75 222.250	0.936 23.774	53.00 9.275	2.329 59.157	123.000 547.104	4.162 105.71	0.187 4.75	22.30	SST CG	N
1.312	33.325	4012	23.00 258.400	1.028 26.111	6.00 1.050	10.000 254.000	60.000 266.880	7.800 198.12	0.142 3.61	54.90	SST CG	N
1.328	33.731	11423	1.25 31.750	1.058 26.873	62.00 10.850	0.440 11.176	27.000 120.096	0.810 20.57	0.135 3.43	6.00	SST CG	N
1.328	33.731	11508	1.25 31.750	1.056 26.822	73.00 12.775	0.300 7.620	22.000 97.856	0.950 24.13	0.136 3.45	6.00	SPR CG	Z
1.328	33.731	S-3068	1.38 35.052	1.208 30.683	4.00 0.700	1.100 27.940	4.300 19.126	0.300 7.62	0.060 1.52	4.00	SST C	N
1.328	33.731	S-233	1.59 40.386	1.004 25.502	189.00 33.075	0.450 11.430	84.000 373.632	0.790 20.07	0.162 4.11	5.00	SST CG	Z
1.328	33.731	11543	2.00 50.800	1.065 27.051	84.00 14.700	0.630 16.002	53.000 235.744	0.790 20.07	0.132 3.35	5.00	SPR CG	Z
1.328	33.731	10364	2.25 57.150	1.204 30.582	2.80 0.490	1.900 48.260	5.300 23.574	0.360 9.14	0.062 1.57	5.75	SPR CG	Z
1.328	33.731	12326	2.38 60.452	1.178 29.921	3.90 0.683	1.800 45.720	6.800 30.246	0.600 15.24	0.075 1.91	8.00	SPR CG	Z
1.328	33.731	12438	2.59 65.786	0.956 24.282	193.00 33.775	0.700 17.780	136.000 604.928	1.490 37.85	0.186 4.72	8.00	SPR CG	N
1.328	33.731	11605	2.69 68.326	1.088 27.635	34.00 5.950	1.200 30.480	41.000 182.368	0.960 24.38	0.120 3.05	7.00	SPR C	Z
1.328	33.731	S-953	2.75 69.850	1.202 30.531	1.90 0.333	2.315 58.801	4.400 19.571	0.435 11.05	0.063 1.59	7.00	SST CG	N
1.328	33.731	S-261	3.13 79.502	1.226 31.140	0.90 0.158	2.700 68.580	2.500 11.120	0.380 9.65	0.051 1.30	6.50	SST C	N
1.328	33.731	S-377	4.38 111.252	1.058 26.873	24.00 4.200	2.100 53.340	51.000 226.848	1.620 41.15	0.135 3.43	12.00	SST CG	N
1.328	33.731	3084	5.38 136.652	1.058 26.873	23.00 4.025	2.400 60.960	57.000 253.536	1.890 48.01	0.135 3.43	14.00	SPR CG	Z
1.328	33.731	11526	5.50 139.700	1.116 28.346	11.00 1.925	2.800 71.120	30.000 133.440	1.310 33.27	0.106 2.69	11.30	SPR CG	GI
1.328	33.731	10840	5.69 144.526	1.114 28.296	6.20 1.085	3.700 93.980	23.000 102.304	2.010 51.05	0.107 2.72	18.80	SPR CG	Z
1.328	33.731	S-1658	6.00 152.400	1.088 27.635	14.00 2.450	2.700 68.580	38.000 169.024	1.500 38.10	0.120 3.05	12.50	SST CG	N
1.328	33.731	3082	8.00 203.200	1.016 25.806	27.00 4.725	3.100 78.740	85.000 378.080	3.320 84.33	0.156 3.96	21.30	SPR CG	Z
1.328	33.731	4306	8.25 209.550	0.974 24.740	54.00 9.450	2.300 58.420	123.000 547.1					




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h
1.343	34.112	11904	4.13 104.902	1.227 31.166	1.20 0.210	3,600 91.440	4,500 20,016	0.480 12.19	0.058 1.47	8.25	SPR	CG N
1.343	34.112	S-155	4.50 114.300	1.227 31.166	1.10 0.193	4,000 101.600	4,300 19.126	0.480 12.19	0.058 1.47	8.25	SST	CG N
1.343	34.112	S-353	4.50 114.300	1.199 30.455	1.60 0.280	3,600 91.440	5,900 26.243	0.860 21.84	0.072 1.83	12.00	SST	CG Z
1.343	34.112	10090	5.50 139.700	0.893 22.682	176.00 30.800	1.300 33.020	224,000 996.352	3,830 97.28	0.225 5.72	17.00	SPR	CG Z
1.343	34.112	4137	5.75 146.050	1.073 27.254	23.00 4.025	2,500 63.500	56,000 249.088	1,890 48.01	0.135 3.43	14.00	SPR	CG Z
1.343	34.112	396	7.09 180.086	1.103 28.016	9.10 1.593	4,500 114.300	41,000 182.368	2,390 60.71	0.120 3.05	20.00	SPR	CG Z
1.343	34.112	12439	10.00 254.000	1.017 25.832	25.00 4.375	3,900 99.060	96,000 427.008	4,560 115.82	0.163 4.14	27.00	SPR	C N
1.343	34.112	1623	10.40 264.160	0.989 25.121	33.00 5.775	3,700 93.980	122,000 542.656	5,090 129.29	0.177 4.50	28.80	SPR	CG Z
1.343	34.112	4014	15.80 401.320	1.049 26.645	8.50 1.488	8,500 215.900	72,000 320.256	7,060 179.32	0.147 3.73	48.00	SPR	CG Z
1.359	34.519	10424	0.50 12.700	1.177 29.896	48.00 8.400	0.250 6.350	18,000 80,064	0.240 6.10	0.091 2.31	2.67	SPR	CG GI
1.359	34.519	2664	1.19 30.226	0.977 24.816	639.00 111.825	0.220 5.588	144,000 640.512	0.740 18.80	0.191 4.85	4.00	SPR	CG Z
1.359	34.519	11677	1.22 30.988	1.199 30.455	7.00 1.225	0.740 18.796	5,200 23.130	0.480 12.19	0.080 2.03	6.00	SPR	CG Z
1.359	34.519	S-1261	1.25 31.750	1.253 31.826	2.50 0.438	1,000 25.400	2,500 11.120	0.250 6.35	0.053 1.35	3.75	SST	C N
1.359	34.519	11824	1.28 32.512	1.179 29.947	18.00 3.150	0.900 22.860	16,000 71.168	0.380 9.65	0.090 2.29	4.25	SST	CG N
1.359	34.519	JJ-52	1.28 32.512	1.119 28.423	78.00 13.650	0.520 13.208	41,000 182.368	0.480 12.19	0.120 3.05	4.00	SPR	CG N
1.359	34.519	11551	1.31 33.274	1.135 28.829	58.00 10.150	0.570 14.478	33,000 146.784	0.560 14.22	0.112 2.84	4.00	SPR	CG Z
1.359	34.519	10511	1.50 38.100	1.247 31.674	2.60 0.455	1.200 30.480	3,000 13.344	0.310 7.87	0.056 1.42	4.50	SPR	C Z
1.359	34.519	3433	1.88 47.752	1.159 29.439	21.00 3.675	1.200 30.480	24,000 106.752	0.650 16.51	0.100 2.54	5.50	SPR	C Z
1.359	34.519	11789	1.94 49.276	1.025 26.035	165.00 28.875	0.620 15.748	102,000 453.696	1,000 25.40	0.167 4.24	6.00	SPR	CG Z
1.359	34.519	3747	2.13 54.102	1.159 29.439	24.00 4.200	1.000 25.400	24,000 106.752	0.500 12.70	0.100 2.54	5.00	SPR	CG Z
1.359	34.519	S-3235	2.19 55.626	1.065 27.051	61.00 10.675	1.075 27.305	66,000 293.568	1.115 28.32	0.148 3.76	7.50	SST	CG N
1.359	34.519	12514	2.25 57.150	1.069 27.153	75.00 13.125	1.100 27.940	84,000 373.632	1.120 28.45	0.145 3.68	6.75	MW	C N
1.359	34.519	11922	2.28 57.912	1.267 32.182	0.15 0.026	1.400 35.560	0.200 0.890	0.920 23.37	0.046 1.17	19.00	SST	C N
1.359	34.519	2564	2.63 66.802	1.199 30.455	7.00 1.225	1.900 48.260	13,000 57.824	0.480 12.19	0.080 2.03	6.00	SPR	CG Z
1.359	34.519	S-960	2.69 68.326	1.177 29.896	11.00 1.925	1.600 40.640	17,000 75.616	0.550 13.97	0.091 2.31	6.00	SST	CG N
1.359	34.519	3373	2.75 69.850	1.215 30.861	3.60 0.630	2,200 55.880	7,900 35.139	0.580 14.73	0.072 1.83	7.00	HD	C Z
1.359	34.519	11409	2.75 69.850	1.119 28.423	30.00 5.250	1,400 35.560	41,000 182.368	0.990 25.15	0.120 3.05	7.25	SPR	C Z
1.359	34.519	11520	2.75 69.850	1.045 26.543	94.00 16.450	0.900 22.860	85,000 378.080	1.310 33.27	0.157 3.99	7.33	SPR	CG Z
1.359	34.519	B17-171	3.00 76.200	1.151 29.235	19.00 3.325	1.300 33.020	25,000 111.200	0.620 15.75	0.104 2.64	6.00	SST	CG N
1.359	34.519	10476	3.13 79.502	1.063 27.000	55.00 9.625	1.300 33.020	73,000 324.704	1.330 33.78	0.148 3.76	9.00	SPR	CG Z
1.359	34.519	3102	3.25 82.550	1.207 30.658	4.50 0.788	2,500 63.500	11,000 48.928	0.610 15.49	0.076 1.93	7.00	SPR	C Z
1.359	34.519	S-3112	3.25 82.550	1.199 30.455	4.70 0.823	2,600 66.040	12,000 53.376	0.660 16.76	0.080 2.03	7.25	SST	C N
1.359	34.519	S-958	3.25 82.550	1.177 29.896	8.40 1.470	2,000 50.800	17,000 75.616	0.640 16.26	0.091 2.31	7.00	SST	CG N
1.359	34.519	11877	3.34 84.836	1.175 29.845	10.00 1.750	1.900 48.260	19,000 84.512	0.640 16.26	0.092 2.34	7.00	SPR	C N
1.359	34.519	S-43	3.50 88.900	1.161 29.489	7.50 1.313	2,553 64.846	19,100 84.957	0.947 24.05	0.098 2.49	9.70	SST	CG N
1.359	34.519	11780	3.50 88.900	1.047 26.594	70.00 12.250	1,200 30.480	83,000 369.184	1.400 35.56	0.156 3.96	9.00	SPR	CG N
1.359	34.519	2859	3.50 88.900	0.909 23.089	311.00 54.425	0.710 18.034	222,000 987.456	2,280 57.91	0.225 5.72	10.00	SPR	CG Z
1.359	34.519	3443	3.69 93.726	0.945 24.003	314.00 54.950	0.580 14.732	181,000 805.088	1,550 39.37	0.207 5.26	7.50	SPR	CG Z
1.359	34.519	S-3251	4.75 120.650	1.239 31.471	1.40 0.245	3,800 96.520	5,500 24.464	0.440 11.18	0.060 1.52	7.25	SST	CG N
1.359	34.519	12060	4.88 123.952	1.175 29.845	6.30 1.103	3,000 76.200	19,000 84.512	1.010 25.65	0.092 2.34	10.00	SPR	C Z
1.359	34.519	S-3249	5.00 127.000	0.967 24.562	128.00 22.400	1,000 25.400	128,000 569.344	2,179 55.35	0.192 4.88	10.40	SST	C N
1.359	34.519	3426	5.75 146.050	1.231 31.267	1.60 0.280	4,500 114.300	7,100 31.581	0.640 16.26	0.064 1.63	9.00	SPR	C Z
1.359	34.519	11401	6.13 155.702	1.119 28.423	13.00 2.275	3,200 81.280	41,000 182.368	1.830 46.48	0.120 3.05	14.30	SPR	C Z
1.359	34.519	2979	11.10 281.940	0.835 21.209	257.00 44.975	1,300 33.020	332,000 1476.736	5,760 146.30	0.262 6.65	22.00	SPR	CG Z
1.375	34.925	11808	0.63 16.002	1.257 31.928	4.40 0.770	0.400 10.160	1,800 8.006	0.220 5.59	0.059 1.50	3.75	SPR	CG Z
1.375	34.925	BB-59	1.00 25.400	1.275 32.385	3.90 0.683	0.850 21.590	3,300 14.678	0.150 3.81	0.050 1.27	3.00	SPR	CG N
1.375	34.925	3393	1.19 30.226	1.125 28.575	80.00 14.000	0.570 14.478	45,000 200.160	0.530 13.46	0.125 3.18	4.25	SPR	CG Z
1.375	34.925	GG-76	1.19 30.226	0.995 25.273	499.00 87.325	0.254 6.452	127,000 564.896	0.779 19.79	0.192 4.88	4.00	SST	C N
1.375	34.925	12539	1.20 30.480	1.081 27.457	207.00 36.225	0.340 8.636	71,000 315.808	0.700 17.78	0.147 3.73	3.75	SPR	C N
1.375	34.925	11883	1.22 30.988	1.271 32.283	3.00 0.525	1,000 25.400	3,100 13.789	0.180 4.57	0.052 1.32	3.50	SPR	CG N
1.375	34.925	917	1.25 31.750	1.165 29.591	43.00 7.525	0.650 16.510	28,000 124.544	0.420 10.67	0.105 2.67	4.00	HD	CG Z
1.375	34.925	3346	1.25 31.750	1.151 29.235	56.00 9.800	0.580 14.732	33,000 146.784	0.450 11.43	0.112 2.84	4.00	SPR	CG Z
1.375	34.925	12140	1.59 40.386	1.115 28.321	47.00 8.225	0.750 19.050	35,000 155.680	0.850 21.59	0.130 3.30	6.50	SPR	CG N
1.375	34.925	S-1087	1.63 41.402	1.135 28.829	48.00 8.400	0.770 19.558	37,000 164.576	0.570 14.48	0.120 3.05	4.75	SST	CG N
1.375	34.925	11628	1.63 41.402	1.123 28.524	41.00 7.175	0.810 20.574	33,000 146.784	0.820 20.83	0.126 3.20	6.50	SPR	CG Z
1.375	34.925	S-326	1.69 42.926	1.105 28.067	63.00 11.025	0.780 19.812	50,000 222.400	0.740 18.80	0.135 3.43	5.50	SST	CG N
1.375	34.925	3560	1.75 44.450	0.991 25.171	393.00 68.775	0.370 9.398	144,000 640.512	0.960 24.38	0.192 4.88	5.00	SPR	CG Z
1.375	34.925	10401	1.97 50.038	1.063 27.000	104.00 18.200	0.790 20.066	82,000 364.736	1.010 25.65	0.156 3.96	6.50	SPR	CG Z
1.375	34.925	12610	2.00 50.800	1.041 26.441	141.00 24.675	0.710 18.034	100,000 444.800	1.090 27.69	0.167 4.24	6.50	SPR	CG Z
1.375	34.925	11671	2.13 54.102	1.045 26.543	141.00 24.675	0.710 18.034	100,000 444.800	1.034 26.26	0.165 4.19	6.30	SST	CG Z
1.375	34.925	12779	2.19 55.626	1.079 27.407	79.00 13.825	0.920 23.368	72,000 320.256	1.000 25.40	0.148 3.76	6.75	HD	CG Z
1.375	34.925	4400	2.22 56.388	1.179 29.947	15.00 2.625							




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
1.375	34.925	1557	3.50	88.900	1.259	31.979	0.89	0.156	2.900	73.660	2.500	11.120	0.640	16.26	0.058	1.47	10.00	SPR	C	Z
1.375	34.925	S-289	3.75	95.250	1.251	31.775	1.50	0.263	3.211	81.559	4.800	21.350	0.539	13.69	0.063	1.59	7.60	SST	C	N
1.375	34.925	2591	3.75	95.250	1.231	31.267	1.60	0.280	2.800	71.120	4.300	19.126	0.950	24.13	0.072	1.83	13.30	HD	CG	Z
1.375	34.925	S-103	3.75	95.250	1.231	31.267	2.60	0.455	3.100	78.740	8.200	36.474	0.630	16.00	0.072	1.83	7.75	SST	C	N
1.375	34.925	S-1355	3.75	95.250	1.199	30.455	7.00	1.225	2.300	58.420	16.000	71.168	0.620	15.75	0.088	2.24	7.00	SST	CG	N
1.375	34.925	S-445	3.75	95.250	1.175	29.845	6.00	1.050	2.600	66.040	15.000	66.720	1.200	30.48	0.100	2.54	12.00	SST	CG	N
1.375	34.925	898	3.75	95.250	1.105	28.067	29.00	5.075	1.900	48.260	55.000	244.640	1.550	39.37	0.135	3.43	10.50	HD	C	Z
1.375	34.925	S-195	3.75	95.250	1.063	27.000	63.00	11.025	1.200	30.480	73.000	324.704	1.330	33.78	0.156	3.96	8.50	SST	CG	N
1.375	34.925	S-327	3.88	98.552	1.231	31.267	2.60	0.455	3.200	81.280	8.600	38.253	0.630	16.00	0.072	1.83	7.75	SST	C	N
1.375	34.925	3987	4.00	101.600	1.021	25.933	80.00	14.000	1.500	38.100	119.000	529.312	2.170	55.12	0.177	4.50	12.30	SPR	CG	Z
1.375	34.925	861	4.13	104.902	1.105	28.067	27.00	4.725	2.100	53.340	55.000	244.640	1.530	38.86	0.135	3.43	11.30	HD	CG	Z
1.375	34.925	11513	4.38	111.252	1.217	30.912	3.70	0.648	3.400	86.360	12.000	53.376	0.790	20.07	0.079	2.01	9.00	SPR	CG	Z
1.375	34.925	823	4.38	111.252	1.079	27.407	36.00	6.300	2.000	50.800	72.000	320.256	1.830	46.48	0.148	3.76	12.30	HD	CG	Z
1.375	34.925	811	4.50	114.300	1.021	25.933	70.00	12.250	1.700	43.180	119.000	529.312	2.430	61.72	0.177	4.50	13.80	HD	CG	Z
1.375	34.925	10363	4.75	120.650	1.181	29.997	6.80	1.190	3.300	83.820	22.000	97.856	1.070	27.18	0.097	2.46	11.00	SPR	CG	Z
1.375	34.925	S-3002	5.38	136.652	1.221	31.013	3.30	0.578	3.420	86.868	11.300	50.262	0.735	18.67	0.078	1.98	8.40	SST	C	N
1.375	34.925	7005	5.38	136.652	1.001	25.425	75.00	13.125	1.800	45.720	134.000	596.032	3.300	83.82	0.187	4.75	16.30	HD	C	Z
1.375	34.925	389	6.00	152.400	1.135	28.829	13.00	2.275	3.200	81.280	40.000	177.920	1.680	42.67	0.120	3.05	14.00	HD	CG	Z
1.375	34.925	11977	6.50	165.100	0.989	25.121	107.00	18.725	1.400	35.560	146.000	649.408	2.560	65.02	0.193	4.90	13.30	SPR	CG	Z
1.375	34.925	845	8.00	203.200	1.021	25.933	44.00	7.700	2.700	68.580	119.000	529.312	3.630	92.20	0.177	4.50	20.50	HD	CG	Z
1.375	34.925	383	9.75	247.650	1.215	30.861	1.10	0.193	7.500	190.500	8.100	36.029	2.240	56.90	0.080	2.03	27.00	HD	C	Z
1.375	34.925	850	10.00	254.000	1.051	26.695	21.00	3.675	4.400	111.760	92.000	409.216	4.810	122.17	0.162	4.11	28.70	HD	C	Z
1.375	34.925	11489	10.90	276.860	1.019	25.883	32.00	5.600	3.800	96.520	121.000	538.208	5.250	133.35	0.178	4.52	28.50	HD	CG	Z
1.375	34.925	862	12.00	304.800	1.105	28.067	8.60	1.505	6.400	162.560	55.000	244.640	4.320	109.73	0.135	3.43	31.00	HD	C	Z
1.375	34.925	824	12.00	304.800	1.079	27.407	12.00	2.100	5.900	149.860	72.000	320.256	4.790	121.67	0.148	3.76	32.30	HD	CG	Z
1.375	34.925	841	12.00	304.800	0.991	25.171	35.00	6.125	4.200	106.680	144.000	640.512	6.910	175.51	0.192	4.88	36.00	HD	CG	Z
1.375	34.925	803	12.00	304.800	0.961	24.409	49.00	8.575	3.700	93.980	179.000	796.192	7.450	189.23	0.207	5.26	36.00	HD	CG	Z
1.375	34.925	801	12.00	304.800	0.925	23.495	79.00	13.825	2.800	71.120	220.000	978.560	7.310	185.67	0.225	5.72	32.50	HD	CG	Z
1.39	35.306	10492	0.78	19.812	1.118	28.397	249.00	43.575	0.220	5.588	56.000	249.088	0.410	10.41	0.136	3.45	3.00	SPR	CG	GI
1.39	35.306	S-401	0.94	23.876	1.120	28.448	143.00	25.025	0.340	8.636	49.000	217.952	0.470	11.94	0.135	3.43	3.50	SST	CG	N
1.39	35.306	3492	1.00	25.400	1.150	29.210	83.00	14.525	0.480	12.192	40.000	177.920	0.450	11.43	0.120	3.05	3.75	HD	CG	Z
1.39	35.306	S-143	1.13	28.702	1.308	33.223	0.72	0.126	0.920	23.368	0.660	2.936	0.210	5.33	0.041	1.04	4.00	SST	C	N
1.39	35.306	2909	1.13	28.702	1.266	32.156	2.60	0.455	0.720	18.288	1.900	8.451	0.400	10.16	0.062	1.57	5.50	SPR	C	Z
1.39	35.306	S-1594	1.69	42.926	1.142	29.007	37.00	6.475	0.931	23.647	34.000	151.232	0.759	19.28	0.125	3.18	6.10	SST	CG	N
1.39	35.306	10359	2.06	52.324	1.016	25.806	213.00	37.275	0.620	15.748	132.000	587.136	1.260	32.00	0.187	4.75	6.75	SPR	CG	Z
1.39	35.306	10498	2.22	56.388	1.194	30.328	13.00	2.275	1.600	40.640	20.300	90.294	0.660	16.76	0.098	2.49	6.75	SPR	CG	Z
1.39	35.306	10300	2.25	57.150	1.190	30.226	19.00	3.325	1.200	30.480	24.000	106.752	0.550	13.97	0.100	2.54	5.50	SPR	CG	Z
1.39	35.306	S-942	2.75	69.850	1.250	31.750	3.50	0.613	2.300	58.420	8.100	36.029	0.400	10.16	0.070	1.78	5.75	SST	CG	N
1.39	35.306	S-3248	3.06	77.724	1.232	31.293	5.50	0.963	2.100	53.340	12.000	53.376	0.470	11.94	0.079	2.01	6.00	SST	CG	N
1.39	35.306	S-1189	3.25	82.550	1.300	33.020	0.26	0.046	2.800	71.120	0.730	3.247	0.500	12.70	0.045	1.14	10.00	SST	C	N
1.39	35.306	S-1245	3.25	82.550	1.150	29.210	25.00	4.375	1.400	35.560	36.000	160.128	0.840	21.34	0.120	3.05	7.00	SST	CG	N
1.39	35.306	3394	5.50	139.700	1.120	28.448	16.00	2.800	3.100	78.740	49.000	217.952	2.430	61.72	0.135	3.43	17.00	SPR	C	Z
1.39	35.306	11308	5.75	146.050	1.230	31.242	2.90	0.508	4.400	111.760	13.000	57.824	0.880	22.35	0.080	2.03	11.00	SPR	CG	Z
1.39	35.306	12680	5.88	149.352	1.114	28.296	18.00	3.150	3.200	81.280	58.000	257.984	2.450	62.23	0.138	3.51	16.80	SPR	C	Z
1.39	35.306	3398	6.50	165.100	1.006	25.552	103.00	18.025	1.400	35.560	143.000	636.064	2.500	63.50	0.192	4.88	13.00	SPR	CG	Z
1.39	35.306	3187	7.00	177.800	1.150	29.210	12.00	2.100	3.300	83.820	40.000	177.920	1.680	42.67	0.120	3.05	14.00	SPR	CG	Z
1.39	35.306	12444	10.00	254.000	1.066	27.076	21.00	3.675	4.300	109.220	91.000	404.768	4.540	115.32	0.162	4.11	27.00	SPR	C	N
1.4	35.560	72766	2.25	57.150	1.076	27.330	116.00	20.300	1.100	27.940	127.000	564.896	1.050	26.67	0.162	4.11	6.50	MW	CG	N
1.4	35.560	72766S	2.25	57.150	1.076	27.330	99.00	17.325	0.810	20.574	80.000	355.840	1.050	26.67	0.162	4.11	6.50	SST	CG	N
1.4	35.560	72775	2.25	57.150	1.046	26.568	169.00	29.575	0.970	24.638	164.000	729.472	1.170	29.72	0.177	4.50	6.63	MW	CG	N
1.4	35.560	72767	2.50	63.500	1.046	26.568	143.00	25.025	0.730	18.542	104.000	462.592	1.170	29.72	0.177	4.50	6.63	SST	CG	N
1.4	35.560	72776	2.50	63.500	1.046	26.568	149.00	26.075	1.100	27.940	164.000	729.472	1.260	32.00	0.177	4.50	7.13	MW		




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh
1.4	35.560	72774S	5.25 133.350	1.076 27.330	39.00 6.825	2.100 53.340	80.000 355.840	2.190 55.63	0.162 4.11	13.50	SST	CG N
1.4	35.560	72783S	5.25 133.350	1.046 26.568	65.00 11.375	2.500 63.500	164.000 729.472	2.460 62.48	0.177 4.50	13.90	MW	CG N
1.4	35.560	72783S	5.25 133.350	1.046 26.568	55.00 9.625	1.900 48.260	104.000 462.592	2.460 62.48	0.177 4.50	13.90	SST	CG N
1.406	35.712	S-1241	0.75 19.050	1.136 28.854	202.00 35.350	0.240 6.096	49.000 217.952	0.410 10.41	0.135 3.43	3.00	SST	CG N
1.406	35.712	S-70	0.88 22.352	1.246 31.648	15.00 2.625	0.600 15.240	8.700 38.698	0.280 7.11	0.080 2.03	3.50	SST	CG N
1.406	35.712	S-3246	1.00 25.400	1.322 33.579	0.78 0.137	0.830 21.082	0.650 2.891	0.170 4.32	0.042 1.07	4.00	SST	CG N
1.406	35.712	S-3024	1.00 25.400	1.256 31.902	9.60 1.680	0.640 16.256	6.200 27.578	0.360 9.14	0.075 1.91	3.75	SST	C N
1.406	35.712	S-3018	1.13 28.702	1.226 31.140	18.00 3.150	0.680 17.272	12.000 53.376	0.450 11.43	0.090 2.29	4.00	SST	C N
1.406	35.712	S-3075	1.13 28.702	1.032 26.213	563.00 98.525	0.200 5.080	113.000 502.624	0.650 16.51	0.187 4.75	3.50	SST	CG N
1.406	35.712	NN-77	1.22 30.988	1.086 27.584	288.00 50.400	0.276 7.010	80.000 355.840	0.576 14.63	0.162 4.11	3.60	SST	CG N
1.406	35.712	3017	1.25 31.750	1.282 32.563	2.50 0.438	0.850 21.590	2.100 9.341	0.400 10.16	0.062 1.57	5.50	SPR	C Z
1.406	35.712	11980	1.25 31.750	1.082 27.483	343.00 60.025	0.260 6.604	90.000 400.320	0.570 14.48	0.162 4.11	3.50	SPR	CG Z
1.406	35.712	3324	1.28 32.512	1.166 29.616	47.00 8.225	0.680 17.272	32.000 142.336	0.600 15.24	0.120 3.05	5.00	HD	CG Z
1.406	35.712	12192	1.34 34.036	1.296 32.918	2.10 0.368	1.000 25.400	2.200 9.786	0.300 7.62	0.055 1.40	4.50	SPR	C Z
1.406	35.712	11908	1.50 38.100	1.300 33.020	1.60 0.280	1.200 30.480	2.000 8.896	0.290 7.37	0.053 1.35	4.50	SST	C N
1.406	35.712	12009	1.50 38.100	1.296 32.918	0.82 0.144	1.000 25.400	0.850 3.781	0.470 11.94	0.055 1.40	8.50	SPR	CG GI
1.406	35.712	S-333	1.50 38.100	1.136 28.854	67.00 11.725	0.720 18.288	49.000 217.952	0.680 17.27	0.135 3.43	5.00	SST	CG N
1.406	35.712	S-1676	1.63 41.402	1.240 31.496	13.00 2.275	1.000 25.400	13.000 57.824	0.420 10.67	0.083 2.11	4.00	SST	C N
1.406	35.712	281	1.75 44.450	1.110 28.194	104.00 18.200	0.680 17.272	71.000 315.808	0.790 20.07	0.148 3.76	5.33	HD	CG Z
1.406	35.712	11424	1.91 48.514	1.032 26.213	216.00 37.800	0.610 15.494	131.000 582.688	1.220 30.99	0.187 4.75	6.50	SPR	CG N
1.406	35.712	11283	2.13 54.102	1.224 31.090	8.70 1.523	1.500 38.100	13.000 57.824	0.640 16.26	0.091 2.31	7.00	HD	CG Z
1.406	35.712	10547	2.13 54.102	1.034 26.264	199.00 34.825	0.650 16.510	129.000 573.792	1.260 32.00	0.186 4.72	6.75	SPR	CG Z
1.406	35.712	S-1250	2.50 63.500	1.136 28.854	43.00 7.525	1.100 27.940	49.000 217.952	0.910 23.11	0.135 3.43	6.75	SST	CG N
1.406	35.712	1683	3.25 82.550	0.984 24.994	257.00 44.975	0.720 18.288	186.000 827.328	1.790 45.47	0.211 5.36	8.50	SPR	CG Z
1.406	35.712	S-1214	3.75 95.250	1.222 31.039	4.40 0.770	2.700 68.580	12.000 53.376	1.010 25.65	0.092 2.34	11.00	SST	CG N
1.406	35.712	3056	4.00 101.600	1.262 32.055	1.50 0.263	3.000 76.200	4.400 19.571	1.010 25.65	0.072 1.83	13.00	SPR	C Z
1.406	35.712	11914	4.00 101.600	1.230 31.242	4.80 0.840	3.200 81.280	15.000 66.720	0.790 20.07	0.088 2.24	9.00	SST	CG N
1.406	35.712	12445	4.13 104.902	1.264 32.106	1.40 0.245	3.200 81.280	4.500 20.016	0.920 23.37	0.071 1.80	13.00	SPR	CG Z
1.406	35.712	S-3233	4.25 107.950	1.196 30.378	4.60 0.805	2.300 58.420	11.000 48.928	1.920 48.77	0.105 2.67	17.30	SST	C N
1.406	35.712	11282	4.25 107.950	0.956 24.282	317.00 55.475	0.570 14.478	181.000 805.088	1.860 47.24	0.225 5.72	8.25	SST	CG N
1.406	35.712	12167	4.41 112.014	1.216 30.886	6.50 1.138	3.100 78.740	20.000 88.960	0.950 24.13	0.095 2.41	10.00	SPR	CG N
1.406	35.712	11906	5.75 146.050	1.166 29.616	14.00 2.450	2.800 71.120	39.000 173.472	1.440 36.58	0.120 3.05	12.00	SPR	CG N
1.406	35.712	2756	6.00 152.400	1.166 29.616	11.00 1.925	3.500 88.900	39.000 173.472	1.740 44.20	0.120 3.05	14.50	SPR	CG Z
1.406	35.712	12151	6.66 169.164	1.258 31.953	2.40 0.420	4.100 104.140	10.000 44.480	0.780 19.81	0.074 1.88	9.50	SPR	C Z
1.406	35.712	12413	7.00 177.800	1.168 29.667	11.00 1.925	3.400 86.360	38.000 169.024	1.790 45.47	0.119 3.02	14.00	SPR	C N
1.406	35.712	3490	12.50 317.500	1.110 28.194	12.00 2.100	6.000 152.400	71.000 315.808	4.630 117.60	0.148 3.76	30.50	SPR	C Z
1.406	35.712	10980	13.50 342.900	0.970 24.638	62.00 10.850	3.300 83.820	204.000 907.392	7.190 182.63	0.218 5.54	33.00	HD	CG Z
1.406	35.712	4013	18.50 469.900	1.046 26.568	16.00 2.800	7.100 180.340	117.000 520.416	9.360 237.74	0.180 4.57	52.00	SPR	CG Z
1.421	36.093	S-336	1.19 30.226	1.203 30.556	46.00 8.050	0.610 15.494	28.000 124.544	0.410 10.41	0.109 2.77	3.75	SST	CG N
1.421	36.093	S-1229	1.38 35.052	1.321 33.553	1.00 0.175	1.100 27.940	1.100 4.893	0.300 7.62	0.050 1.27	5.00	SST	C N
1.421	36.093	4395	2.19 55.626	1.249 31.725	7.00 1.225	1.600 40.640	11.000 48.928	0.580 14.73	0.086 2.18	6.75	SPR	CG Z
1.421	36.093	S-3229	2.50 63.500	1.275 32.385	4.40 0.770	2.020 51.308	8.900 39.587	0.480 12.19	0.074 1.88	5.50	SST	C N
1.421	36.093	2733	2.50 63.500	1.171 29.743	40.00 7.000	1.500 38.100	61.000 271.328	0.750 19.05	0.125 3.18	6.00	MW	CG Z
1.421	36.093	1913	2.75 69.850	1.211 30.759	11.00 1.925	1.800 45.720	20.000 88.960	0.950 24.13	0.105 2.67	9.00	SPR	CG Z
1.421	36.093	3328	2.75 69.850	1.001 25.425	242.00 42.350	0.750 19.050	182.000 809.536	1.790 45.47	0.210 5.33	8.50	SPR	CG Z
1.421	36.093	S-3022	3.00 76.200	1.109 28.169	66.00 11.550	1.100 27.940	71.000 315.808	1.170 29.72	0.156 3.96	7.50	SST	CG N
1.421	36.093	11930	3.03 76.962	1.211 30.759	15.00 2.625	1.800 45.720	27.000 120.096	0.740 18.80	0.105 2.67	7.00	SPR	CG Z
1.421	36.093	4194	4.00 101.600	1.281 32.537	1.30 0.228	3.000 76.200	3.800 16.902	0.980 24.89	0.070 1.78	13.00	SPR	C Z
1.421	36.093	3141	5.13 130.302	1.261 32.029	2.60 0.455	4.100 104.140	11.000 48.928	1.000 25.40	0.080 2.03	11.50	SPR	C Z
1.421	36.093	12460	12.00 304.800	1.003 25.476	55.00 9.625	3.300 83.820	179.000 796.192	6.320 160.53	0.209 5.31	30.30	SPR	CG N
1.421	36.093	4018	27.50 698.500	0.921 23.393	60.00 10.500	4.800 121.920	289.000 1285.472	15.000 381.00	0.250 6.35	60.00	SPR	CG N
1.437	36.500	S-1550	0.56 14.224	1.237 31.420	70.00 12.250	0.290 7.366	20.000 88.960	0.280 7.11	0.100 2.54	2.75	SST	CG N
1.437	36.500	DD-88	0.69 17.526	1.217 30.912	45.00 7.875	0.250 6.350	11.000 48.928	0.440 11.18	0.110 2.79	4.00	SPR	CG Z
1.437	36.500	S-3059	0.88 22.352	1.281 32.537	12.00 2.100	0.520 13.208	6.400 28.467	0.350 8.89	0.078 1.98	3.50	SST	C N
1.437	36.500	12222	1.00 25.400	1.293 32.842	15.00 2.625	0.600 15.240	9.100 40.477	0.220 5.59	0.072 1.83	3.00	SPR	CG Z
1.437	36.500	S-151	1.50 38.100	1.347 34.214	0.32 0.056	1.100 27.940	0.350 1.557	0.410 10.41	0.045 1.14	8.00	SST	C N
1.437	36.500	S-1033	1.50 38.100	1.277 32.436	5.90 1.033	0.980 24.892	5.700 25.354	0.520 13.21	0.080 2.03	5.50	SST	C N
1.437	36.500	11360	1.50 38.100	1.255 31.877	12.00 2.100	1.000 25.400	12.000 53.376	0.460 11.68	0.091 2.31	5.00	SST	CG N
1.437	36.500	3071	1.50 38.100	1.173 29.794	56.00 9.800	0.770 19.558	43.000 191.264	0.730 18.54	0.132 3.35	5.50	SPR	CG Z
1.437	36.500	S-944	1.69 42.926	1.237 31.420	26.00 4.550	0.820 20.828	21.000 93.408	0.400 10.16	0.100 2.54	4.00	SST	CG N
1.437	36.500	12487	1.75 44.450	1.317 33.452	1.00 0.175	1.200 30.480	1.300 5.782	0.540 13.72	0.060 1.52	8.00	SST	C N
1.437	36.500	B17-167	1.84 46.736	1.125 28.575	135.00 23.625	0.580 14.732	79.00					




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
1.453	36.906	3299	1.53	38.862	1.227	31.166	49.00	8.575	0.650	16.510	32.000	142.336	0.450	11.43	0.113	2.87	4.00	SPR	CG	Z
1.453	36.906	3297	1.75	44.450	1.243	31.572	12.00	2.100	0.910	23.114	11.000	48.928	0.840	21.34	0.105	2.67	8.00	HD	CG	Z
1.453	36.906	12297	1.94	49.276	1.323	33.604	3.20	0.560	1.600	40.640	5.200	23.130	0.330	8.38	0.065	1.65	5.00	SPR	CG	Z
1.453	36.906	10339	2.06	52.324	1.233	31.318	35.00	6.125	0.850	21.590	29.000	128.992	0.500	12.70	0.110	2.79	4.50	SPR	CG	Z
1.453	36.906	4359	2.06	52.324	1.069	27.153	216.00	37.800	0.630	16.002	137.000	609.376	1.250	31.75	0.192	4.88	6.50	SPR	CG	Z
1.453	36.906	11791	2.41	61.214	1.203	30.556	37.00	6.475	1.100	27.940	43.000	191.264	0.750	19.05	0.125	3.18	6.00	SPR	CG	Z
1.453	36.906	12616	2.50	63.500	1.203	30.556	37.00	6.475	1.600	40.640	60.000	266.880	0.880	22.35	0.125	3.18	6.00	MW	C	N
1.453	36.906	B11-63	2.84	72.136	1.157	29.388	62.00	10.850	1.100	27.940	69.000	306.912	1.040	26.42	0.148	3.76	7.00	SPR	CG	N
1.453	36.906	B17-203	2.88	73.152	1.275	32.385	6.30	1.103	2.300	58.420	14.100	62.717	0.643	16.33	0.090	2.29	7.10	SST	CG	N
1.453	36.906	11238	3.00	76.200	1.141	28.981	58.00	10.150	1.400	35.560	78.000	346.944	1.370	34.80	0.156	3.96	8.75	SPR	CG	Z
1.453	36.906	4026	20.30	515.620	1.123	28.524	12.00	2.100	7.800	198.120	92.000	409.216	7.260	184.40	0.165	4.19	44.00	SPR	CG	Z
1.453	36.906	4038	21.00	533.400	1.099	27.915	16.00	2.800	6.900	175.260	113.000	502.624	7.700	195.58	0.177	4.50	43.50	SPR	CG	Z
1.453	36.906	4032	22.50	571.500	1.093	27.762	16.00	2.800	7.300	185.420	114.000	507.072	8.820	224.03	0.180	4.57	49.00	SPR	CG	Z
1.46	37.084	72784	1.50	38.100	1.236	31.394	41.00	7.175	1.000	25.400	42.000	186.816	0.480	12.19	0.112	2.84	4.25	MW	CG	N
1.46	37.084	72784S	1.50	38.100	1.236	31.394	35.00	6.125	0.800	20.320	28.000	124.544	0.480	12.19	0.112	2.84	4.25	SST	CG	N
1.46	37.084	72794	1.50	38.100	1.210	30.734	61.00	10.675	0.950	24.130	58.000	257.984	0.550	13.97	0.125	3.18	4.38	MW	CG	N
1.46	37.084	72794S	1.50	38.100	1.210	30.734	52.00	9.100	0.760	19.304	39.000	173.472	0.550	13.97	0.125	3.18	4.38	SST	CG	N
1.46	37.084	72800	1.50	38.100	1.190	30.226	80.00	14.000	0.890	22.606	72.000	320.256	0.610	15.49	0.135	3.43	4.50	MW	CG	N
1.46	37.084	72800S	1.50	38.100	1.190	30.226	68.00	11.900	0.690	17.526	47.000	209.056	0.610	15.49	0.135	3.43	4.50	SST	CG	N
1.46	37.084	72810	1.50	38.100	1.164	29.566	114.00	19.950	0.820	20.828	93.000	413.664	0.680	17.27	0.148	3.76	4.63	MW	CG	N
1.46	37.084	72810S	1.50	38.100	1.164	29.566	97.00	16.975	0.640	16.256	62.000	275.776	0.680	17.27	0.148	3.76	4.63	SST	CG	N
1.46	37.084	72817	1.50	38.100	1.148	29.159	143.00	25.025	0.760	19.304	109.000	484.832	0.720	18.29	0.156	3.96	4.63	MW	CG	N
1.46	37.084	72817S	1.50	38.100	1.148	29.159	122.00	21.350	0.570	14.478	69.000	306.912	0.720	18.29	0.156	3.96	4.63	SST	CG	N
1.46	37.084	72832	1.50	38.100	1.136	28.854	162.00	28.350	0.730	18.542	119.000	529.312	0.770	19.56	0.162	4.11	4.75	MW	CG	N
1.46	37.084	72832S	1.50	38.100	1.136	28.854	138.00	24.150	0.560	14.224	77.000	342.496	0.770	19.56	0.162	4.11	4.75	SST	CG	N
1.46	37.084	72841	1.50	38.100	1.106	28.092	240.00	42.000	0.660	16.764	158.000	702.784	0.840	21.34	0.177	4.50	4.75	MW	CG	N
1.46	37.084	72841S	1.50	38.100	1.106	28.092	204.00	35.700	0.490	12.446	100.000	444.800	0.840	21.34	0.177	4.50	4.75	SST	CG	N
1.46	37.084	72785	2.00	50.800	1.236	31.394	30.00	5.250	1.400	35.560	42.000	186.816	0.570	14.48	0.112	2.84	5.13	MW	CG	N
1.46	37.084	72785S	2.00	50.800	1.236	31.394	25.00	4.375	1.100	27.940	28.000	124.544	0.570	14.48	0.112	2.84	5.13	SST	CG	N
1.46	37.084	72795	2.00	50.800	1.210	30.734	43.00	7.525	1.300	33.020	58.000	257.984	0.670	17.02	0.125	3.18	5.38	MW	CG	N
1.46	37.084	72795S	2.00	50.800	1.210	30.734	37.00	6.475	1.100	27.940	39.000	173.472	0.670	17.02	0.125	3.18	5.38	SST	CG	N
1.46	37.084	72801	2.00	50.800	1.190	30.226	57.00	9.975	1.200	30.480	71.000	315.808	0.760	19.30	0.135	3.43	5.63	MW	CG	N
1.46	37.084	72801S	2.00	50.800	1.190	30.226	49.00	8.575	0.970	24.638	47.000	209.056	0.760	19.30	0.135	3.43	5.63	SST	CG	N
1.46	37.084	72811	2.00	50.800	1.164	29.566	80.00	14.000	1.100	27.940	92.000	409.216	0.850	21.59	0.148	3.76	5.75	MW	CG	N
1.46	37.084	72811S	2.00	50.800	1.164	29.566	68.00	11.900	0.900	22.860	62.000	275.776	0.850	21.59	0.148	3.76	5.75	SST	CG	N
1.46	37.084	72819	2.00	50.800	1.148	29.159	101.00	17.675	1.100	27.940	109.000	484.832	0.900	22.86	0.156	3.96	5.75	MW	CG	N
1.46	37.084	72819S	2.00	50.800	1.148	29.159	86.00	15.050	0.810	20.574	69.000	306.912	0.900	22.86	0.156	3.96	5.75	SST	CG	N
1.46	37.084	72833	2.00	50.800	1.136	28.854	114.00	19.950	1.000	25.400	117.000	520.416	0.970	24.64	0.162	4.11	6.00	MW	CG	N
1.46	37.084	72833S	2.00	50.800	1.136	28.854	97.00	16.975	0.800	20.320	77.000	342.496	0.970	24.64	0.162	4.11	6.00	SST	CG	N
1.46	37.084	72843	2.00	50.800	1.106	28.092	167.00	29.225	0.940	23.876	157.000	698.336	1.060	26.92	0.177	4.50	6.00	MW	CG	N
1.46	37.084	72843S	2.00	50.800	1.106	28.092	142.00	24.850	0.710	18.034	100.000	444.800	1.060	26.92	0.177	4.50	6.00	SST	CG	N
1.46	37.084	72786	2.50	63.500	1.236	31.394	23.00	4.025	1.800	45.720	42.000	186.816	0.670	17.02	0.112	2.84	6.00	MW	CG	N
1.46	37.084	72786S	2.50	63.500	1.236	31.394	20.00	3.500	1.400	35.560	28.000	124.544	0.670	17.02	0.112	2.84	6.00	SST	CG	N
1.46	37.084	72796	2.50	63.500	1.210	30.734	34.00	5.950	1.700	43.180	57.000	253.536	0.800	20.32	0.125	3.18	6.38	MW	CG	N
1.46	37.084	72796S	2.50	63.500	1.210	30.734	29.00	5.075	1.400	35.560	39.000	173.472	0.800	20.32	0.125	3.18	6.38	SST	CG	N
1.46	37.084	72802	2.50	63.500	1.190	30.226	44.00	7.700	1.600	40.640	71.000	315.808	0.890	22.61	0.135	3.43	6.63	MW	CG	N
1.46	37.084	72802S	2.50	63.500	1.190	30.226	38.00	6.650	1.200	30.480	47.000	209.056	0.890	22.61	0.135	3.43	6.63	SST	CG	N
1.46	37.084	72812	2.50	63.500	1.164	29.566	62.00	10.850	1.500	38.100	92.000	409.216	1.020	25.91	0.148	3.76	6.88	MW	CG	N
1.46	37.084	72812S	2.50	63.500	1.164	29.566	53.00	9.275	1.200	30.480	62.000	275.776	1.020	25.91	0.148	3.76	6.88	SST	CG	N
1.46	37.084	72821	2.50	63.500	1.148	29.159	78.00	13.650	1.400	35.560	109.000	484.832	1.070	27.18	0.156	3.96	6.88	MW	CG	N
1.46	37.084	72821S	2.50	63.500	1.148	29.159	66.00	11.550	1.000	25.400	69.000	306.912	1.070	27.18	0.156	3.96	6.88	SST	CG	N
1.46	37.084	72834	2.50	63.500	1.136	28.854	88.00	15.400	1.300	33.020	118.000	524.864	1.1							




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
1.46	37.084	72814S	3.50 88.900	1.164 29.566	36.00 6.300	1.700 43.180	62.000 275.776	1.350 34.29	0.148 3.76	9.13	SST	CG N
1.46	37.084	72825	3.50 88.900	1.148 29.159	53.00 9.275	2.000 50.800	109.000 484.832	1.440 36.58	0.156 3.96	9.25	MW	CG N
1.46	37.084	72825S	3.50 88.900	1.148 29.159	45.00 7.875	1.500 38.100	69.000 306.912	1.440 36.58	0.156 3.96	9.25	SST	CG N
1.46	37.084	72836	3.50 88.900	1.136 28.854	60.00 10.500	2.000 50.800	118.000 524.864	1.540 39.12	0.162 4.11	9.50	MW	CG N
1.46	37.084	72836S	3.50 88.900	1.136 28.854	51.00 8.925	1.500 38.100	77.000 342.496	1.540 39.12	0.162 4.11	9.50	SST	CG N
1.46	37.084	72849	3.50 88.900	1.106 28.092	87.00 15.225	1.800 45.720	157.000 698.336	1.700 43.18	0.177 4.50	9.63	MW	CG N
1.46	37.084	72849S	3.50 88.900	1.106 28.092	74.00 12.950	1.300 33.020	100.000 444.800	1.700 43.18	0.177 4.50	9.63	SST	CG N
1.46	37.084	72858	3.50 88.900	1.086 27.584	116.00 20.300	1.500 38.100	179.000 796.192	1.750 44.45	0.187 4.75	9.38	MW	CG N
1.46	37.084	72858S	3.50 88.900	1.086 27.584	99.00 17.325	1.100 27.940	109.000 484.832	1.750 44.45	0.187 4.75	9.38	SST	CG N
1.46	37.084	72789	4.00 101.600	1.236 31.394	14.00 2.450	3.000 76.200	42.000 186.816	0.970 24.64	0.112 2.84	8.63	MW	CG N
1.46	37.084	72789S	4.00 101.600	1.236 31.394	12.00 2.100	2.400 60.960	28.000 124.544	0.970 24.64	0.112 2.84	8.63	SST	CG N
1.46	37.084	72799	4.00 101.600	1.210 30.734	20.00 3.500	2.500 71.120	57.000 253.536	1.160 29.46	0.125 3.18	9.25	MW	CG N
1.46	37.084	72799S	4.00 101.600	1.210 30.734	17.00 2.975	2.300 58.420	39.000 173.472	1.160 29.46	0.125 3.18	9.25	SST	CG N
1.46	37.084	72805	4.00 101.600	1.190 30.226	27.00 4.725	2.700 68.580	71.000 315.808	1.320 33.53	0.135 3.43	9.75	MW	CG N
1.46	37.084	72805S	4.00 101.600	1.190 30.226	23.00 4.025	2.100 53.340	47.000 209.056	1.320 33.53	0.135 3.43	9.75	SST	CG N
1.46	37.084	72815	4.00 101.600	1.164 29.566	37.00 6.475	2.500 63.500	92.000 409.216	1.520 38.61	0.148 3.76	10.30	MW	CG N
1.46	37.084	72815S	4.00 101.600	1.164 29.566	31.00 5.425	2.000 50.800	62.000 275.776	1.520 38.61	0.148 3.76	10.30	SST	CG N
1.46	37.084	72827	4.00 101.600	1.148 29.159	46.00 8.050	2.400 60.960	109.000 484.832	1.600 40.64	0.156 3.96	10.30	MW	CG N
1.46	37.084	72827S	4.00 101.600	1.148 29.159	39.00 6.825	1.800 45.720	69.000 306.912	1.600 40.64	0.156 3.96	10.30	SST	CG N
1.46	37.084	72837	4.00 101.600	1.136 28.854	52.00 9.100	2.300 58.420	117.000 520.416	1.740 44.20	0.162 4.11	10.80	MW	CG N
1.46	37.084	72837S	4.00 101.600	1.136 28.854	44.00 7.700	1.700 43.180	77.000 342.496	1.740 44.20	0.162 4.11	10.80	SST	CG N
1.46	37.084	72851	4.00 101.600	1.106 28.092	75.00 13.125	2.100 53.340	156.000 693.888	1.920 48.77	0.177 4.50	10.90	MW	CG N
1.46	37.084	72851S	4.00 101.600	1.106 28.092	64.00 11.200	1.600 40.640	100.000 444.800	1.920 48.77	0.177 4.50	10.90	SST	CG N
1.46	37.084	72859	4.00 101.600	1.086 27.584	99.00 17.325	1.800 45.720	179.000 796.192	1.990 50.55	0.187 4.75	10.60	MW	CG N
1.46	37.084	72859S	4.00 101.600	1.086 27.584	84.00 14.700	1.300 33.020	109.000 484.832	1.990 50.55	0.187 4.75	10.60	SST	CG N
1.46	37.084	72860	4.25 107.950	1.086 27.584	78.00 13.650	1.400 35.560	109.000 484.832	2.100 53.34	0.187 4.75	11.30	MW	CG N
1.46	37.084	72791	4.50 114.300	1.236 31.394	14.00 2.450	3.100 78.740	43.000 191.264	0.970 24.64	0.112 2.84	8.63	MW	CG N
1.46	37.084	72791S	4.50 114.300	1.236 31.394	12.00 2.100	2.400 60.960	28.000 124.544	0.970 24.64	0.112 2.84	8.63	SST	CG N
1.46	37.084	72807	4.50 114.300	1.190 30.226	24.00 4.200	3.100 78.740	73.000 324.704	1.430 36.32	0.135 3.43	10.60	MW	CG N
1.46	37.084	72807S	4.50 114.300	1.190 30.226	20.00 3.500	2.300 58.420	47.000 209.056	1.430 36.32	0.135 3.43	10.60	SST	CG N
1.46	37.084	72829	4.50 114.300	1.148 29.159	41.00 7.175	2.700 68.580	109.000 484.832	1.770 44.96	0.156 3.96	11.40	MW	CG N
1.46	37.084	72829S	4.50 114.300	1.148 29.159	35.00 6.125	2.000 50.800	69.000 306.912	1.770 44.96	0.156 3.96	11.40	SST	CG N
1.46	37.084	72838	4.50 114.300	1.136 28.854	46.00 8.050	2.600 66.040	118.000 524.864	1.920 48.77	0.162 4.11	11.90	MW	CG N
1.46	37.084	72838S	4.50 114.300	1.136 28.854	39.00 6.825	2.000 50.800	77.000 342.496	1.920 48.77	0.162 4.11	11.90	SST	CG N
1.46	37.084	72853	4.50 114.300	1.106 28.092	66.00 11.550	2.400 60.960	156.000 693.888	2.150 54.61	0.177 4.50	12.10	MW	CG N
1.46	37.084	72853S	4.50 114.300	1.106 28.092	56.00 9.800	1.800 45.720	100.000 444.800	2.150 54.61	0.177 4.50	12.10	SST	CG N
1.46	37.084	72861	4.50 114.300	1.086 27.584	86.00 15.050	2.100 53.340	179.000 796.192	2.220 56.39	0.187 4.75	11.90	MW	CG N
1.46	37.084	72861S	4.50 114.300	1.086 27.584	73.00 12.775	1.500 38.100	109.000 484.832	2.220 56.39	0.187 4.75	11.90	SST	CG N
1.46	37.084	72793S	5.00 127.000	1.236 31.394	13.00 2.275	3.400 86.360	43.000 191.264	1.050 26.67	0.112 2.84	9.38	MW	CG N
1.46	37.084	72809	5.00 127.000	1.190 30.226	21.00 3.675	3.400 86.360	73.000 324.704	1.570 39.88	0.135 3.43	11.60	MW	CG N
1.46	37.084	72809S	5.00 127.000	1.190 30.226	18.00 3.150	2.600 66.040	47.000 209.056	1.570 39.88	0.135 3.43	11.60	SST	CG N
1.46	37.084	72831	5.00 127.000	1.148 29.159	36.00 6.300	3.000 76.200	109.000 484.832	1.970 50.04	0.156 3.96	12.60	MW	CG N
1.46	37.084	72831S	5.00 127.000	1.148 29.159	31.00 5.425	2.200 55.880	69.000 306.912	1.970 50.04	0.156 3.96	12.60	SST	CG N
1.46	37.084	72839	5.00 127.000	1.136 28.854	41.00 7.175	2.900 73.660	117.000 520.416	2.130 54.10	0.162 4.11	13.10	MW	CG N
1.46	37.084	72839S	5.00 127.000	1.136 28.854	35.00 6.125	2.200 55.880	77.000 342.496	2.130 54.10	0.162 4.11	13.10	SST	CG N
1.46	37.084	72855	5.00 127.000	1.106 28.092	59.00 10.325	2.700 68.580	157.000 698.336	2.350 59.69	0.177 4.50	13.30	MW	CG N
1.46	37.084	72855S	5.00 127.000	1.106 28.092	50.00 8.750	2.000 50.800	100.000 444.800	2.350 59.69	0.177 4.50	13.30	SST	CG N
1.46	37.084	72862	5.00 127.000	1.086 27.584	77.00 13.475	2.300 58.420	179.000 796.192	2.450 62.23	0.187 4.75	13.10	MW	CG N
1.46	37.084	72862S	5.00 127.000	1.086 27.584	65.00 11.375	1.700 43.180	109.000 484.832	2.450 62.23	0.187 4.75	13.10	SST	CG N
1.46	37.084	72863	5.25 133.350	1.086 27.584	73.00 12.775	2.400 60.960	179.000 796.192	2.550 64.77	0.187 4.75	13.60	MW	CG N
1.46	37.084	72863S	5.25 133.350	1.086 27.584	62.00 10.850	1.800 45.720	109.000 484.832	2.550 64.77	0.187 4.75	13.60	SST	CG N
1.468	37.287	S-3052	0.69 17.526	1.410 35.814	0.30 0.053	0.570 14.478	0.170 0.756	0.120 3.05	0.029 0.74	3.00	SST	C N
1.468	37.287	1853	1.00 25.400	1.198 30.429	134.00 23.450	0.390 9.906	52.000 231.296	0.470 11.94	0.135 3.43	3.50	SPR	CG Z
1.468	37.287	3496	1.31 33.274	1.258 31.953	28.00 4.900	0.840 21.336	23.000 102.304	0.470 11.94	0.105 2.67	4.50	SPR	CG Z
1.468	37.287	3456	1.31 33.274	1.018 25.857	959.00 167.825	0.220 5.588	207.000 920.736	0.900 22.86	0.225 5.72	4.00	SPR	CG Z
1.468	37.287	11426	1.50 38.100	1.054 26.772	389.00 68.075	0.370 9.398	146.000 649.408	1.040 26.42	0.207 5.26	5.00	SST	CG N
1.468	37.287	S-1669	1.56 39.624	1.308 33.223	13.00 2.275	0.880 22.352	11.000 48.928	0.280 7.11	0.080 2.03	3.50	SST	CG N
1.468	37.287	S-1358	1.75 44.450	1.268 32.207	24.00 4.200	0.860 21.844	21.000 93.408	0.400 10.16	0.100 2.54	4.00	SST	CG N
1.468	37.287	S-1443	1.84 46.736	1.054 26.772	327.00 57.225	0.450 11.430	146.000 649.408	1.140 28.96	0.207 5.26	5.50	SST	CG N
1.468	37.287	S-3192	2.00 50.800	1.272 32.309	18.00 3.150	1.100 27.940	20.000 88.960	0.440 11.18	0.098 2.49	4.50	SST	CG N
1.468	37.287	S-1632	2.06 52.324	1.094 27.788	212.00 37.100	0.510 12.954	108.000 480.384	1.030 26.16	0.187 4.75	5.50	SST	




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
1.468	37.287	12270	4.59 116.586	1.298 32.969	3.50 0.613	3.700 93.980	13.000 57.824	0.850 21.59	0.085 2.16	10.00	SPR	CG Z
1.468	37.287	12440	4.81 122.174	1.032 26.213	148.00 25.900	1.300 33.020	196.000 871.808	2.890 73.41	0.218 5.54	13.30	SPR	CG Z
1.468	37.287	S-970	5.13 130.302	1.240 31.496	8.80 1.540	3.400 86.360	30.000 133.440	1.330 33.78	0.114 2.90	11.70	SST	CG N
1.468	37.287	S-3216	5.25 133.350	1.310 33.274	1.60 0.280	4.200 106.680	6.700 29.802	1.070 27.18	0.079 2.01	13.50	SST	CG N
1.468	37.287	10388	5.75 146.050	1.030 26.162	148.00 25.900	1.300 33.020	199.000 885.152	2.960 75.18	0.219 5.56	13.50	SPR	CG Z
1.484	37.694	S-383	3.25 82.950	1.274 32.360	13.00 2.275	1.900 48.260	24.000 106.752	0.680 17.27	0.105 2.67	6.50	SST	CG N
1.484	37.694	3023	3.38 85.852	1.172 29.769	61.00 10.675	1.300 33.020	77.000 342.496	1.250 31.75	0.156 3.96	8.00	SPR	CG Z
1.484	37.694	12412	5.00 127.000	1.380 35.052	0.80 0.140	4.400 111.760	3.500 15.568	0.390 9.91	0.052 1.32	6.50	SPR	C Z
1.484	37.694	1735	9.00 228.600	1.160 29.464	20.00 3.500	4.200 106.680	86.000 382.528	3.730 94.74	0.162 4.11	23.00	SPR	CG Z
1.5	38.100	11898	0.84 21.336	1.230 31.242	125.00 21.875	0.370 9.398	46.000 204.608	0.450 11.43	0.135 3.43	3.33	SST	CG N
1.5	38.100	3804	1.25 31.750	1.290 32.766	32.00 5.600	0.800 20.320	26.000 115.648	0.420 10.67	0.105 2.67	4.00	SPR	CG Z
1.5	38.100	12635	1.56 39.624	1.184 30.074	185.00 32.375	0.589 14.961	109.000 484.832	0.790 20.07	0.157 3.99	3.90	MW	C N
1.5	38.100	S-1197	1.75 44.450	1.380 35.052	2.00 0.350	1.400 35.560	2.800 12.454	0.350 8.89	0.060 1.52	4.75	SST	C N
1.5	38.100	S-3032	1.75 44.450	1.374 34.900	2.50 0.438	1.402 35.611	3.500 15.568	0.348 8.84	0.063 1.59	4.60	SST	C N
1.5	38.100	11471	1.75 44.450	1.340 34.036	6.30 1.103	1.300 33.020	8.400 37.363	0.420 10.67	0.080 2.03	5.25	HD	CG Z
1.5	38.100	12544	1.75 44.450	1.188 30.175	140.00 24.500	0.610 15.494	85.000 378.080	0.860 21.84	0.156 3.96	4.50	OT	C N
1.5	38.100	10405	1.94 49.276	1.274 32.360	27.00 4.725	1.100 27.940	31.000 137.888	0.590 14.99	0.113 2.87	5.25	SPR	CG N
1.5	38.100	3647	2.06 52.324	1.376 34.950	2.40 0.420	1.700 43.180	4.000 17.792	0.370 9.40	0.062 1.57	5.00	SPR	C Z
1.5	38.100	10145	2.13 54.102	1.086 27.584	376.00 65.800	0.440 11.176	166.000 738.368	1.090 27.69	0.207 5.26	5.25	SPR	CG Z
1.5	38.100	12645	2.25 57.150	1.340 34.036	4.00 0.700	1.700 43.180	6.900 30.691	0.520 13.21	0.080 2.03	6.50	SST	CG N
1.5	38.100	S-290	2.25 57.150	1.250 31.750	59.00 10.325	0.650 16.510	38.000 169.024	0.500 12.70	0.125 3.18	4.00	SST	CG N
1.5	38.100	10569	2.44 61.976	1.098 27.889	204.00 35.700	0.750 19.050	152.000 676.096	1.460 37.08	0.201 5.11	7.25	SPR	CG Z
1.5	38.100	10666	2.50 63.500	1.264 32.106	25.00 4.375	1.400 35.560	35.000 155.680	0.740 18.80	0.118 3.00	6.25	SPR	CG Z
1.5	38.100	74	2.50 63.500	1.230 31.242	42.00 7.350	1.200 30.480	51.000 226.848	0.880 22.35	0.135 3.43	6.50	HD	CG Z
1.5	38.100	947	2.50 63.500	1.086 27.584	244.00 42.700	0.680 17.272	166.000 738.368	1.450 36.83	0.207 5.26	7.00	HD	CG Z
1.5	38.100	11140	2.56 65.024	1.260 32.004	28.00 4.900	1.300 33.020	37.000 164.576	0.720 18.29	0.120 3.05	6.00	HD	CG Z
1.5	38.100	11147	2.56 65.024	1.086 27.584	349.00 61.075	0.480 12.192	166.000 738.368	1.140 28.96	0.207 5.26	5.50	SPR	CG Z
1.5	38.100	S-1263	2.63 66.802	1.318 33.477	6.80 1.190	2.000 50.800	14.000 62.272	0.590 14.99	0.091 2.31	6.50	SST	CG N
1.5	38.100	10606	2.69 68.326	1.032 26.213	405.00 70.875	0.560 14.224	228.000 1014.144	1.700 43.18	0.234 5.94	7.25	SPR	CG Z
1.5	38.100	B17-181	2.75 69.850	0.988 25.095	583.00 102.025	0.531 13.487	309.000 1374.432	1.920 48.77	0.262 6.65	8.10	SPR	CG Z
1.5	38.100	S-1673	2.78 70.612	1.262 32.055	18.00 3.150	1.883 47.828	34.000 151.232	0.898 22.81	0.120 3.05	7.50	SST	CG N
1.5	38.100	10392	3.00 76.200	0.976 24.790	595.00 104.125	0.510 12.954	305.000 1356.640	2.100 53.34	0.262 6.65	8.00	SPR	CG Z
1.5	38.100	3015	3.06 77.724	1.220 30.988	40.00 7.000	1.400 35.560	57.000 253.536	1.050 26.67	0.140 3.56	7.50	SPR	CG Z
1.5	38.100	S-329	3.25 82.550	1.404 35.662	0.29 0.051	2.767 70.282	0.800 3.558	0.483 12.27	0.048 1.21	9.20	SST	C N
1.5	38.100	531	3.25 82.550	1.204 30.582	43.00 7.525	1.600 40.640	67.000 298.016	1.260 32.00	0.148 3.76	8.50	HD	CG Z
1.5	38.100	S-1602	3.31 84.074	1.340 34.036	2.80 0.490	2.600 66.040	7.200 32.026	0.760 19.30	0.080 2.03	8.50	SST	CG N
1.5	38.100	10372	3.63 92.202	1.064 27.026	193.00 33.775	1.000 25.400	193.000 858.464	2.180 55.37	0.218 5.54	10.00	SPR	CG Z
1.5	38.100	11970	3.75 95.250	1.174 29.820	71.00 12.425	1.200 30.480	86.000 382.528	1.300 33.02	0.163 4.14	8.00	SPR	CG Z
1.5	38.100	S-3230	3.78 96.012	1.086 27.584	120.00 21.000	1.200 30.480	143.000 636.064	2.280 57.91	0.207 5.26	11.00	SST	CG N
1.5	38.100	S-1327	4.00 101.600	1.392 35.357	0.56 0.098	3.500 88.900	2.000 8.896	0.500 12.70	0.054 1.37	8.25	SST	C N
1.5	38.100	S-1649	4.00 101.600	1.240 31.496	17.00 2.975	2.500 63.500	41.000 182.368	1.370 34.80	0.130 3.30	10.50	SST	CG N
1.5	38.100	32	4.00 101.600	1.230 31.242	24.00 4.200	2.100 53.340	51.000 226.848	1.320 33.53	0.135 3.43	9.75	HD	CG Z
1.5	38.100	11514	4.16 105.664	1.282 32.563	11.00 1.925	2.700 68.580	29.000 128.992	1.090 27.69	0.109 2.77	9.00	SPR	CG Z
1.5	38.100	3380	4.25 107.950	1.286 32.664	10.00 1.750	2.700 68.580	27.000 120.096	1.070 27.18	0.107 2.72	9.00	SPR	C Z
1.5	38.100	S-3167	4.50 114.300	1.300 33.020	7.30 1.278	2.800 71.120	21.000 93.408	0.830 21.08	0.100 2.54	8.25	SST	CG N
1.5	38.100	11976	4.50 114.300	1.260 32.004	22.00 3.850	1.700 43.180	37.000 164.576	0.870 22.10	0.120 3.05	7.25	SPR	CG Z
1.5	38.100	4259	4.50 114.300	1.012 25.705	321.00 56.175	0.800 20.320	257.000 1143.136	2.440 61.98	0.244 6.20	10.00	SPR	CG Z
1.5	38.100	3135	4.56 115.824	1.300 33.020	8.30 1.453	2.700 68.580	22.000 97.856	0.830 21.08	0.100 2.54	8.33	SPR	CG Z
1.5	38.100	12042	4.59 116.586	1.250 31.750	16.00 2.800	2.600 66.040	42.000 186.816	1.310 33.27	0.125 3.18	10.50	SPR	CG Z
1.5	38.100	2847	4.88 123.952	1.176 29.870	57.00 9.975	1.500 38.100	85.000 378.080	1.500 38.10	0.162 4.11	9.25	SPR	CG Z
1.5	38.100	7058	5.00 127.000	1.032 26.213	161.00 28.175	1.200 30.480	192.000 854.016	3.390 86.11	0.234 5.94	13.50	SST	C N
1.5	38.100	S-467	5.13 130.302	1.250 31.750	9.80 1.715	3.400 86.360	33.000 146.784	1.750 44.45	0.125 3.18	14.00	SST	CG N
1.5	38.100	7009	5.88 149.352	1.050 26.670	125.00 21.875	1.600 40.640	203.000 902.944	3.900 99.06	0.225 5.72	16.30	HD	C Z
1.5	38.100	3440	6.00 152.400	1.290 32.766	4.00 0.700	4.100 104.140	17.000 75.616	1.890 48.01	0.105 2.67	18.00	SPR	CG Z
1.5	38.100	3378	6.75 171.450	1.070 27.178	90.00 15.750	2.000 50.800	185.000 822.880	3.870 98.30	0.215 5.46	18.00	SPR	CG Z
1.5	38.100	S-985	6.88 174.752	1.250 31.750	9.00 1.575	4.200 106.680	38.000 169.024	1.880 47.75	0.125 3.18	15.00	SST	CG N
1.5	38.100	846	8.00 203.200	1.146 29.108	31.00 5.425	3.500 88.900	110.000 489.280	3.810 96.77	0.177 4.50	21.50	HD	CG Z
1.5	38.100	12152	8.63 219.202	1.156 29.362	27.00 4.725	3.725 800.0	101.000 449.248	3.780 96.01	0.172 4.37	22.00	SPR	CG Z
1.5	38.100	4222	10.00 254.000	1.290 32.766	2.90 0.508	7.400 187.960	21.000 93.408	2.570 65.28	0.105 2.67	24.50	SPR	CG Z
1.5	38.100	10256	10.00 254.000	1.116 28.346	49.00 8.575	2.700 68.580	133.000 591.584	3.980 101.09	0.192 4.88	19.80	SPR	C GI
1.5	38.100	863	12.00 304.800	1.230 31.242	7.50 1.313	6.800 172.720	51.000 226.848	3.650 92.71	0.135 3.43	27.00	HD	CG Z
1.5	38.100	532	12.00 304.800	1.204 30.582	11.00 1.925	6.300 160.020	67.000 298.016	4.370 111.00				




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
1.515	38.481	3414	8.50 215.900	1.065 27.051	86.00 15.050	2.300 58.420	202.000 898.496	4.950 125.73	0.225 5.72	22.00	SPR	CG Z
1.531	38.887	11262	1.19 30.226	1.247 31.674	77.00 13.475	0.550 13.970	42.000 186.816	0.640 16.26	0.142 3.61	4.50	SST	CG N
1.531	38.887	11155	1.25 31.750	1.247 31.674	97.00 16.975	0.600 15.240	58.000 257.984	0.600 15.24	0.142 3.61	4.25	SPR	CG Z
1.531	38.887	S-1648	1.41 35.814	1.321 33.553	21.00 3.675	0.930 23.622	20.000 88.960	0.470 11.94	0.105 2.67	4.50	SST	CG N
1.531	38.887	1675	1.50 38.100	1.399 35.535	3.30 0.578	1.100 27.940	3.700 16.458	0.370 9.40	0.066 1.68	4.67	SPR	C Z
1.531	38.887	10648	1.63 41.402	1.371 34.823	6.40 1.120	1.200 30.480	7.900 35.139	0.400 10.16	0.080 2.03	5.00	SPR	CG Z
1.531	38.887	S-85	2.00 50.800	1.387 35.230	3.90 0.683	1.600 40.640	6.200 27.578	0.410 10.41	0.072 1.83	4.75	SST	C N
1.531	38.887	S-405	2.00 50.800	1.147 29.134	202.00 35.350	0.560 14.224	113.000 502.624	1.060 26.92	0.192 4.88	5.50	SST	CG N
1.531	38.887	11152	2.19 55.626	1.091 27.711	498.00 87.150	0.380 9.652	187.000 831.776	1.100 27.94	0.220 5.59	5.00	SPR	CG Z
1.531	38.887	4397	2.22 56.388	1.321 33.553	13.00 2.275	1.500 38.100	19.000 84.512	0.710 18.03	0.105 2.67	6.75	SPR	CG N
1.531	38.887	10391	2.25 57.150	1.105 28.067	431.00 75.425	0.410 10.414	177.000 787.296	1.070 27.18	0.213 5.41	5.00	SPR	CG Z
1.531	38.887	10319	2.44 61.976	1.117 28.372	284.00 49.700	0.570 14.478	163.000 725.024	1.240 31.50	0.207 5.26	6.00	SPR	CG Z
1.531	38.887	10835	3.00 76.200	1.305 33.147	17.00 2.975	1.600 40.640	28.000 124.544	0.710 18.03	0.113 2.87	6.25	SST	CG N
1.531	38.887	4242	3.00 76.200	1.207 30.658	110.00 19.250	0.750 19.050	83.000 369.184	0.890 22.61	0.162 4.11	5.50	SPR	CG Z
1.531	38.887	S-3111	3.38 85.852	1.321 33.553	12.00 2.100	2.000 50.800	23.000 102.304	0.680 17.27	0.105 2.67	6.50	SST	CG N
1.531	38.887	4115	4.25 107.950	0.907 23.038	1003.00 175.525	0.480 12.192	478.000 2126.144	2.960 75.18	0.312 7.92	9.50	SPR	CG Z
1.531	38.887	S-449	6.50 165.100	1.147 29.134	46.00 8.050	2.500 63.500	113.000 502.624	3.360 85.34	0.192 4.88	17.50	SST	CG N
1.546	39.268	10324	1.25 31.750	1.276 32.410	113.00 19.775	0.440 11.176	49.000 217.952	0.470 11.94	0.135 3.43	3.50	SPR	CG Z
1.546	39.268	1721	1.38 35.052	1.402 35.611	5.40 0.945	1.000 25.400	5.300 23.574	0.380 9.65	0.072 1.83	4.25	SPR	C Z
1.546	39.268	11156	1.50 38.100	1.134 28.804	269.00 47.075	0.260 6.604	71.000 315.808	1.240 31.50	0.206 5.23	6.00	SPR	CG Z
1.546	39.268	4335	1.63 41.402	1.266 32.156	114.00 19.950	0.480 12.192	55.000 244.640	0.530 13.46	0.140 3.56	3.75	SPR	CG Z
1.546	39.268	11224	1.75 44.450	1.310 33.274	28.00 4.900	1.100 27.940	31.000 137.888	0.590 14.99	0.118 3.00	5.00	SST	CG N
1.546	39.268	S-98	2.19 55.626	1.172 29.769	187.00 32.725	0.550 13.970	103.000 458.144	0.980 24.89	0.187 4.75	5.25	SST	CG N
1.546	39.268	12011	2.38 60.452	1.276 32.410	57.00 9.975	0.870 22.098	49.000 217.952	0.680 17.27	0.135 3.43	5.00	SPR	CG Z
1.546	39.268	11979	3.25 82.550	1.262 32.055	38.00 6.650	1.500 38.100	57.000 253.536	1.070 27.18	0.142 3.61	7.50	SPR	CG Z
1.546	39.268	B8-68	4.09 103.886	1.296 32.918	14.00 2.450	2.700 68.580	37.000 164.576	1.250 31.75	0.125 3.18	10.00	SST	CG N
1.546	39.268	S-1134	4.50 114.300	1.452 36.881	0.13 0.023	3.700 93.980	0.480 2.135	0.800 20.32	0.047 1.19	16.00	SST	C N
1.546	39.268	4169	6.25 158.750	1.246 31.648	21.00 3.675	3.100 78.740	66.000 293.568	2.180 55.37	0.150 3.81	14.50	SPR	CG GI
1.546	39.268	S-455	7.00 177.800	1.366 34.696	1.70 0.298	5.400 137.160	9.000 40.032	1.610 40.89	0.090 2.29	18.00	SST	CG N
1.55	39.370	7010	4.98 126.492	1.096 27.838	157.00 27.475	1.300 33.020	203.000 902.944	3.060 77.72	0.225 5.72	12.50	HD	C Z
1.562	39.675	12057	1.06 26.924	1.322 33.579	66.00 11.550	0.540 13.716	35.000 155.680	0.420 10.67	0.120 3.05	3.50	SPR	CG Z
1.562	39.675	11154	1.13 28.702	1.266 32.156	122.00 21.350	0.530 13.462	64.000 284.672	0.590 14.99	0.148 3.76	4.00	SPR	CG Z
1.562	39.675	10428	1.19 30.226	1.266 32.156	108.00 18.900	0.560 14.224	61.000 271.328	0.630 16.00	0.148 3.76	4.25	SPR	CG Z
1.562	39.675	10318	1.25 31.750	1.250 31.750	175.00 30.625	0.420 10.668	73.000 324.704	0.590 14.99	0.156 3.96	3.75	SPR	CG Z
1.562	39.675	10131	1.28 32.512	1.250 31.750	153.00 26.775	0.480 12.192	73.000 324.704	0.620 15.75	0.156 3.96	4.00	SPR	CG Z
1.562	39.675	3348	1.38 35.052	1.418 36.017	9.30 1.628	0.900 22.860	8.400 37.363	0.310 7.87	0.072 1.83	3.25	HD	C Z
1.562	39.675	3355	1.88 47.752	1.312 33.325	47.00 8.225	0.850 21.590	40.000 177.920	0.560 14.22	0.125 3.18	4.50	HD	CG Z
1.562	39.675	10333	2.00 50.800	1.148 29.159	250.00 43.750	0.640 16.256	160.000 711.680	1.290 32.77	0.207 5.26	6.25	SPR	CG Z
1.562	39.675	3701	2.38 60.452	1.444 36.678	1.50 0.263	2.100 53.340	3.000 13.344	0.320 8.13	0.059 1.50	5.50	SPR	CG Z
1.562	39.675	11170	2.56 65.024	1.188 30.175	169.00 29.575	0.700 17.780	119.000 529.312	1.120 28.45	0.187 4.75	6.00	SPR	CG Z
1.562	39.675	11177	2.56 65.024	1.188 30.175	225.00 39.375	0.530 13.462	119.000 529.312	0.940 23.88	0.187 4.75	5.00	SPR	CG Z
1.562	39.675	11996	2.63 66.802	0.876 22.250	2312.00 404.600	0.260 6.604	599.000 2664.352	2.320 58.93	0.343 8.71	6.75	SPR	CG Z
1.562	39.675	852	2.75 69.850	1.238 31.445	69.00 12.075	1.200 30.480	82.000 364.736	1.170 29.72	0.162 4.11	7.25	HD	CG Z
1.562	39.675	S-314	3.16 80.264	1.436 36.474	2.10 0.368	2.600 66.040	5.600 24.909	0.360 9.14	0.063 1.60	4.75	SST	C N
1.562	39.675	4346	3.63 92.202	1.178 29.921	76.00 13.300	1.300 33.020	100.000 444.800	2.300 58.42	0.192 4.88	12.00	SPR	CG Z
1.562	39.675	895	4.00 101.600	0.996 25.298	497.00 86.975	0.740 18.796	367.000 1632.416	3.080 78.23	0.283 7.19	11.00	HD	CG Z
1.562	39.675	812	4.25 107.950	1.208 30.683	57.00 9.975	1.900 48.260	106.000 471.488	2.010 51.05	0.177 4.50	11.30	HD	CG Z
1.562	39.675	678	4.38 111.252	1.076 27.330	213.00 37.275	1.200 30.480	245.000 1089.760	2.980 75.69	0.243 6.17	12.30	HD	CG Z
1.562	39.675	11669	4.84 122.936	1.478 37.541	0.07 0.012	4.000 101.600	0.300 1.334	0.800 20.32	0.042 1.07	19.00	SPR	C N
1.562	39.675	3244	5.00 127.000	1.202 30.531	54.00 9.450	2.000 50.800	106.000 471.488	2.250 57.15	0.180 4.57	12.50	SPR	CG Z
1.562	39.675	10570	5.00 127.000	1.108 28.143	153.00 26.775	1.300 33.020	201.000 894.048	3.070 77.98	0.227 5.77	12.50	SPR	C Z
1.562	39.675	S-3110	5.50 139.700	1.380 35.052	4.70 0.823	3.200 81.280	15.000 66.720	0.710 18.03	0.091 2.31	7.75	SST	CG N
1.562	39.675	11509	6.41 162.814	1.260 32.004	20.00 3.500	3.300 83.820	66.000 293.568	2.470 62.74	0.151 3.84	15.30	SPR	CG Z
1.562	39.675	911	7.50 190.500	1.266 32.156	15.00 2.625	4.300 109.220	64.000 284.672	2.740 69.60	0.148 3.76	18.50	HD	CG Z
1.562	39.675	2735	11.40 289.560	1.362 34.595	2.90 0.508	7.300 185.420	21.000 93.408	1.780 45.21	0.100 2.54	17.80	SPR	CG Z
1.578	40.081	12276	1.00 25.400	1.496 37.998	0.37 0.065	0.750 19.050	0.280 1.245	0.250 6.35	0.041 1.04	5.00	SPR	C Z
1.578	40.081	11148	1.25 31.750	1.266 32.156	169.00 29.575	0.430 10.922	72.000 320.256	0.590 14.99	0.156 3.96	3.75	SPR	CG Z
1.578	40.081	3358	1.31 33.274	1.204 30.582	435.00 76.125	0.270 6.858	118.000 524.864	0.650 16.51	0.187 4.75	3.50	SPR	CG Z
1.578	40.081	10349	1.56 39.624	1.368 34.747	14.00 2.450	0.930 23.622	13.000 57.824	0.630 16.00	0.105 2.67	6.00	SPR	CG Z
1.578	40.081	S-162	1.63 41.402	1.426 36.220	2.90 0.508	1.200 30.480	3.300 14.678	0.480 12.19	0.076 1.93	6.25	SST	CG N
1.578	40.081	S-3227	1.72 43.688	1.394 35.408	5.60 0.980	1.100 27.940	6.000 26.688	0.640 16.26	0.092 2.34	7.00	SST	CG N
1.578	40.081	11774	2									




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
1.58	40.132	72869	5.00	127.000	1.166	29.616	95.00	16.625	2,400	60,960	223.000	991.904	2,640	67.06	0.207	5.26	12.80	MW CG N
1.58	40.132	72869S	5.00	127.000	1.166	29.616	81.00	14.175	1,700	43.180	136.000	604.928	2,640	67.06	0.207	5.26	12.80	SST CG N
1.58	40.132	72870	5.50	139.700	1.166	29.616	86.00	15.050	2,600	66.040	223.000	991.904	2,870	72.90	0.207	5.26	13.90	MW CG N
1.58	40.132	72870S	5.50	139.700	1.166	29.616	73.00	12.775	1,900	48.260	136.000	604.928	2,870	72.90	0.207	5.26	13.90	SST CG N
1.58	40.132	72871	6.00	152.400	1.166	29.616	79.00	13.825	2,800	71.120	223.000	991.904	3,080	78.23	0.207	5.26	14.90	MW CG N
1.58	40.132	72871S	6.00	152.400	1.166	29.616	67.00	11.725	2,000	50.800	136.000	604.928	3,080	78.23	0.207	5.26	14.90	SST CG N
1.593	40.462	S-1600	2.25	57.150	1.347	34.214	15.00	2.625	1,196	30.378	17.900	79.619	1,054	26.77	0.125	3.18	8.40	SST CG N
1.593	40.462	3428	2.50	63.500	1.343	34.112	16.00	2.800	1,400	35.560	22.000	97.856	1,130	28.70	0.125	3.18	9.00	HD CG Z
1.593	40.462	S-991	2.63	66.802	1.417	35.992	7.30	1.278	1,900	48.260	14.000	62.272	0,440	11.18	0.088	2.24	5.00	SST CG N
1.593	40.462	10825	4.25	107.950	1.351	34.315	19.00	3.325	1,800	45.720	36.000	160.128	0,970	24.64	0.121	3.07	7.00	SPR C Z
1.593	40.462	3641	5.00	127.000	1.453	36.906	1.20	0.210	4,300	109.220	5,300	23.574	0,700	17.78	0.070	1.78	10.00	HD CG Z
1.593	40.462	3109	5.13	130.302	1.343	34.112	11.00	1.925	3,500	88.900	39.000	173.472	1,630	41.40	0.125	3.18	12.00	SPR C Z
1.593	40.462	S-359	5.13	130.302	1.179	29.947	108.00	18.900	1,300	33.020	135.000	600.480	2,070	52.58	0.207	5.26	10.00	SST CG N
1.609	40.869	10451	1.28	32.512	1.277	32.436	208.00	36.400	0,410	10.414	85.000	378.080	0,620	15.75	0.166	4.22	3.75	SPR CG Z
1.609	40.869	2717	1.56	39.624	1.409	35.789	8.40	1.470	0,760	19.304	6,400	28.467	0,800	20.32	0.100	2.54	7.00	SPR CG Z
1.609	40.869	11957	1.69	42.926	1.423	36.144	5.50	0.963	1,000	25.400	5,700	25.354	0,650	16.51	0.093	2.36	7.00	SPR CG Z
1.609	40.869	10507	2.00	50.800	1.383	35.128	16.00	2.800	1,300	33.020	20.000	88.960	0,740	18.80	0.113	2.87	6.50	SPR CG Z
1.609	40.869	11119	2.41	61.214	1.169	29.693	343.00	60.025	0,444	11.278	152.000	676.096	1,100	27.94	0.218	5.54	5.00	SST CG N
1.609	40.869	3220	2.50	63.500	1.255	31.877	96.00	16.800	1,100	27.940	103.000	458.144	1,240	31.50	0.177	4.50	7.00	SPR CG Z
1.609	40.869	11641	2.59	65.786	1.427	36.246	9.40	1.645	1,700	43.180	16.000	71.168	0,550	13.97	0.091	2.31	5.00	SPR CG Z
1.609	40.869	11757	4.00	101.600	1.427	36.246	4.20	0.735	3,200	81.280	13.000	57.824	0,800	20.32	0.091	2.31	8.75	SPR CG Z
1.609	40.869	12089	4.94	125.476	1.469	37.313	1.20	0.210	4,200	106.680	5,000	22.240	0,700	17.78	0.070	1.78	10.00	SPR CG Z
1.609	40.869	4393	7.00	177.800	1.159	29.439	93.00	16.275	2,100	53.340	191.000	849.568	3,830	97.28	0.225	5.72	17.00	SPR CG Z
1.609	40.869	3445	7.75	196.850	1.219	30.963	49.00	8.575	2,700	68.580	131.000	582.688	3,320	84.33	0.195	4.95	17.00	SPR CG BO
1.625	41.275	S-1170	0.50	12.700	1.375	34.925	90.00	15.750	0,130	3.302	11.000	48.928	0,380	9.65	0.125	3.18	3.00	SST CG N
1.625	41.275	4350	1.00	25.400	1.301	33.045	316.00	55.300	0,250	6.350	79.000	351.392	0,490	12.45	0.162	4.11	3.00	SPR CG Z
1.625	41.275	10893	1.03	26.162	1.543	39.192	0.30	0.053	0,790	20.066	0,240	1.068	0,250	6.35	0.041	1.04	5.00	SST C N
1.625	41.275	3408	1.19	30.226	1.287	32.690	380.00	66.500	0,230	5.842	89.000	395.872	0,510	12.95	0.169	4.29	3.00	SPR CG Z
1.625	41.275	10543	1.28	32.512	1.301	33.045	181.00	31.675	0,440	11.176	79.000	351.392	0,610	15.49	0.162	4.11	3.75	SPR CG Z
1.625	41.275	1535	1.58	40.132	1.415	35.941	15.00	2.625	1,000	25.400	16.000	71.168	0,550	13.97	0.105	2.67	5.25	SPR CG Z
1.625	41.275	10045	1.63	41.402	1.481	37.617	5.20	0.910	1,300	33.020	6,500	28.912	0,360	9.14	0.072	1.83	4.00	SPR C Z
1.625	41.275	10015	1.63	41.402	1.001	25.425	3009.00	526.575	0,150	3.810	456.000	2028.288	1,250	31.75	0.312	7.92	4.00	SPR CG Z
1.625	41.275	10101	2.25	57.150	1.175	29.845	448.00	78.400	0,420	10.668	189.000	840.672	1,130	28.70	0.225	5.72	5.00	SPR CG Z
1.625	41.275	10362	2.44	61.976	1.189	30.201	359.00	62.825	0,500	12.700	179.000	796.192	1,150	29.21	0.218	5.54	5.25	SPR CG Z
1.625	41.275	S-240	2.50	63.500	1.501	38.125	1.80	0.315	2,139	54.331	3,900	17.347	0,361	9.17	0.063	1.59	4.80	SST C N
1.625	41.275	3294	2.63	66.802	1.281	32.537	117.00	20.475	0,800	20.320	94.000	418.112	0,950	24.13	0.172	4.37	5.50	SPR CG Z
1.625	41.275	S-84	3.50	88.900	1.241	31.521	115.00	20.125	0,920	23.368	106.000	471.488	1,540	39.12	0.192	4.88	7.00	SST C N
1.625	41.275	S-275	3.75	95.250	1.375	34.925	14.00	2.450	2,500	63.500	35.000	155.680	1,060	26.92	0.125	3.18	8.50	SST CG N
1.625	41.275	12119	3.84	97.536	1.375	34.925	12.00	2.100	2,500	63.500	31.000	137.888	1,310	33.27	0.125	3.18	10.50	SPR CG Z
1.625	41.275	12725	4.30	109.220	1.443	36.652	3.00	0.525	3,200	81.280	9,700	43.146	1,090	27.69	0.091	2.31	11.00	HD C N
1.625	41.275	369	4.50	114.300	1.139	28.931	200.00	35.000	1,200	30.480	237.000	1054.176	2,790	70.87	0.243	6.17	11.50	HD CG Z
1.625	41.275	2793	5.63	143.002	1.343	34.112	13.00	2.275	3,500	88.900	47.000	209.056	2,120	53.85	0.141	3.58	15.00	SPR CG GI
1.625	41.275	10393	7.25	184.150	1.137	28.880	119.00	20.825	2,000	50.800	239.000	1063.072	4,450	113.03	0.244	6.20	18.30	SPR CG Z
1.625	41.275	843	12.00	304.800	1.241	31.521	24.00	4.200	5,100	129.540	124.000	551.552	5,660	143.76	0.192	4.88	29.50	HD CG Z
1.64	41.656	S-1465	1.38	35.052	1.464	37.186	13.00	2.275	0,980	24.892	13.000	57.824	0,400	10.16	0.088	2.24	3.50	SST C N
1.64	41.656	S-965	1.69	42.926	1.344	34.138	60.00	10.500	0,920	23.368	55.000	244.640	0,740	18.80	0.148	3.76	5.00	SST CG N
1.64	41.656	3008	1.88	47.752	1.496	37.998	4.00	0.700	1,600	40.640	6,200	27.578	0,320	8.13	0.072	1.83	4.50	SPR CG GI
1.64	41.656	3105	2.00	50.800	1.370	34.798	49.00	8.575	0,960	24.384	47.000	209.056	0,660	16.76	0.135	3.43	5.00	SPR CG Z
1.64	41.656	S-1666	2.25	57.150	1.370	34.798	41.00	7.175	1,000	25.400	42.000	186.816	0,680	17.27	0.135	3.43	5.00	SST CG N
1.64	41.656	3239	2.25	57.150	1.286	32.664	120.00	21.000	0,840	21.336	101.000	449.248	1,020	25.91	0.177	4.50	5.75	SPR CG Z
1.64	41.656	S-3237	2.34	59.436	1.390	35.306	20.00	3.500	1,500	38.100	30.000	133.440	0,810	20.57	0.125	3.18	6.50	SST CG N
1.64	41.656	S-102	3.25	82.550	1.328	33.731	38.00	6.650	1,600	40.640	62.000	275.776	1,250	31.75	0.156	3.96	8.00	SST CG N
1.64	41.656	4193	3.25	82.550	1.016	25.806	969.00	169.575	0,470	11.938	452.000	2010.496	2,500	63.50	0,312	7.92	8.00	SPR CG Z
1.64	41.656	2990	3.38	85.852	1.476	37.490	3.40	0.595	2,700	68.580	9,300	41.366	0,660	16.76	0.082	2.08	7.00	SPR C Z
1.64	41.656	S-319	3.63															




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Ends Mat'l	F n sh									
1.687	42.850	365	1.88	47.752	1.333	33.858	142.00	24.850	0.690	17.526	98.000	435.904	0.860	21.84	0.177	4.50	5.00	HD	CG	Z
1.687	42.850	11380	2.00	50.800	1.505	38.227	12.00	2.100	1.100	27.940	14.000	62.272	0.340	8.64	0.091	2.31	3.75	SST	CG	N
1.687	42.850	72873	2.00	50.800	1.417	35.992	46.00	8.050	1.400	35.560	62.000	275.776	0.640	16.26	0.135	3.43	4.75	MW	CG	N
1.687	42.850	72873S	2.00	50.800	1.417	35.992	39.00	6.825	1.000	25.400	41.000	182.368	0.640	16.26	0.135	3.43	4.75	SST	CG	N
1.687	42.850	72884	2.00	50.800	1.375	34.925	79.00	13.825	1.200	30.480	95.000	422.560	0.780	19.81	0.156	3.96	5.00	MW	CG	N
1.687	42.850	72884S	2.00	50.800	1.375	34.925	67.00	11.725	0.900	22.860	60.000	266.880	0.780	19.81	0.156	3.96	5.00	SST	CG	N
1.687	42.850	72899	2.00	50.800	1.333	33.858	124.00	21.700	1.000	25.400	130.000	578.240	0.950	24.13	0.177	4.50	5.38	MW	CG	N
1.687	42.850	72899S	2.00	50.800	1.333	33.858	105.00	18.375	0.830	21.082	87.000	386.976	0.950	24.13	0.177	4.50	5.38	SST	CG	N
1.687	42.850	72910	2.00	50.800	1.303	33.096	171.00	29.925	0.970	24.638	165.000	733.920	1.030	26.16	0.192	4.88	5.38	MW	CG	N
1.687	42.850	72910S	2.00	50.800	1.303	33.096	145.00	25.375	0.710	18.034	103.000	458.144	1.030	26.16	0.192	4.88	5.38	SST	CG	N
1.687	42.850	S-3065	2.25	57.150	1.407	35.738	43.00	7.525	1.100	27.940	46.000	204.608	0.700	17.78	0.140	3.56	5.00	SST	CG	N
1.687	42.850	72874	2.50	63.500	1.417	35.992	36.00	6.300	1.700	43.180	62.000	275.776	0.760	19.30	0.135	3.43	5.63	MW	CG	N
1.687	42.850	72874S	2.50	63.500	1.417	35.992	30.00	5.250	1.400	35.560	41.000	182.368	0.760	19.30	0.135	3.43	5.63	SST	CG	N
1.687	42.850	72886	2.50	63.500	1.375	34.925	61.00	10.675	1.600	40.640	95.000	422.560	0.920	23.37	0.156	3.96	5.88	MW	CG	N
1.687	42.850	72886S	2.50	63.500	1.375	34.925	52.00	9.100	1.200	30.480	60.000	266.880	0.920	23.37	0.156	3.96	5.88	SST	CG	N
1.687	42.850	72901	2.50	63.500	1.333	33.858	97.00	16.975	1.400	35.560	136.000	604.928	1.110	28.19	0.177	4.50	6.25	MW	CG	N
1.687	42.850	72901S	2.50	63.500	1.333	33.858	83.00	14.525	1.100	27.940	87.000	386.976	1.110	28.19	0.177	4.50	6.25	SST	CG	N
1.687	42.850	72911	2.50	63.500	1.303	33.096	131.00	22.925	1.300	33.020	163.000	725.024	1.250	31.75	0.192	4.88	6.50	MW	CG	N
1.687	42.850	72911S	2.50	63.500	1.303	33.096	111.00	19.425	0.930	23.622	103.000	458.144	1.250	31.75	0.192	4.88	6.50	SST	CG	N
1.687	42.850	72917	2.50	63.500	1.251	31.775	228.00	39.900	1.100	27.940	245.000	1089.760	1.420	36.07	0.218	5.54	6.50	MW	CG	N
1.687	42.850	72917S	2.50	63.500	1.251	31.775	194.00	33.950	0.770	19.558	149.000	662.752	1.420	36.07	0.218	5.54	6.50	SST	CG	N
1.687	42.850	72925	2.50	63.500	1.219	30.963	263.00	46.025	0.660	16.764	173.000	769.504	1.520	38.61	0.234	5.94	6.60	MW	CG	N
1.687	42.850	72925S	2.50	63.500	1.219	30.963	310.00	54.250	0.944	23.978	293.000	1303.264	0.156	3.95	0.235	5.97	6.60	SST	CG	N
1.687	42.850	72925	2.50	63.500	1.219	30.963	310.00	54.250	0.944	23.978	293.000	1303.264	0.156	3.95	0.235	5.97	6.60	MW	CG	N
1.687	42.850	11425	2.88	73.152	1.363	34.620	56.00	9.800	1.400	35.560	76.000	338.048	1.130	28.70	0.162	4.11	7.00	SPR	CG	Z
1.687	42.850	72875	3.00	76.200	1.417	35.992	29.00	5.075	2.100	53.340	62.000	275.776	0.860	21.84	0.135	3.43	6.38	MW	CG	N
1.687	42.850	72875S	3.00	76.200	1.417	35.992	25.00	4.375	1.700	43.180	41.000	182.368	0.860	21.84	0.135	3.43	6.38	SST	CG	N
1.687	42.850	72888	3.00	76.200	1.375	34.925	50.00	8.750	1.900	48.260	95.000	422.560	1.050	26.67	0.156	3.96	6.75	MW	CG	N
1.687	42.850	72888S	3.00	76.200	1.375	34.925	42.00	7.350	1.400	35.560	60.000	266.880	1.050	26.67	0.156	3.96	6.75	SST	CG	N
1.687	42.850	72903	3.00	76.200	1.333	33.858	79.00	13.825	1.700	43.180	136.000	604.928	1.280	32.51	0.177	4.50	7.25	MW	CG	N
1.687	42.850	72903S	3.00	76.200	1.333	33.858	67.00	11.725	1.300	33.020	87.000	386.976	1.280	32.51	0.177	4.50	7.25	SST	CG	N
1.687	42.850	72912	3.00	76.200	1.303	33.096	106.00	18.550	1.600	40.640	165.000	733.920	1.440	36.58	0.192	4.88	7.50	MW	CG	N
1.687	42.850	72912S	3.00	76.200	1.303	33.096	90.00	15.750	1.100	27.940	103.000	458.144	1.440	36.58	0.192	4.88	7.50	SST	CG	N
1.687	42.850	72918	3.00	76.200	1.251	31.775	181.00	31.675	1.300	33.020	242.000	1076.416	1.660	42.16	0.218	5.54	7.63	MW	CG	N
1.687	42.850	72918S	3.00	76.200	1.251	31.775	154.00	26.950	0.970	24.638	149.000	662.752	1.660	42.16	0.218	5.54	7.63	SST	CG	N
1.687	42.850	72926S	3.00	76.200	1.219	30.963	211.00	36.925	0.820	20.828	173.000	769.504	1.780	45.21	0.234	5.94	7.63	SST	CG	N
1.687	42.850	72926	3.00	76.200	1.219	30.963	249.00	43.575	1.178	29.921	293.000	1303.264	1.822	46.28	0.235	5.97	7.70	MW	CG	N
1.687	42.850	11253	3.00	76.200	1.201	30.505	290.00	50.750	0.790	20.066	229.000	1018.592	1.880	47.75	0.243	6.17	7.75	SPR	CG	Z
1.687	42.850	72876	3.50	88.900	1.417	35.992	25.00	4.375	2.500	63.500	62.000	275.776	0.980	24.89	0.135	3.43	7.25	MW	CG	N
1.687	42.850	72876S	3.50	88.900	1.417	35.992	21.00	3.675	2.000	50.800	41.000	182.368	0.980	24.89	0.135	3.43	7.25	SST	CG	N
1.687	42.850	72890	3.50	88.900	1.375	34.925	42.00	7.350	2.300	58.420	95.000	422.560	1.190	30.23	0.156	3.96	7.63	SST	CG	N
1.687	42.850	72890S	3.50	88.900	1.375	34.925	36.00	6.300	1.700	43.180	60.000	266.880	1.190	30.23	0.156	3.96	7.63	SST	CG	N
1.687	42.850	72905	3.50	88.900	1.333	33.858	66.00	11.550	2.100	53.340	137.000	609.376	1.440	36.58	0.177	4.50	8.13	MW	CG	N
1.687	42.850	72905S	3.50	88.900	1.333	33.858	56.00	9.800	1.500	38.100	87.000	386.976	1.440	36.58	0.177	4.50	8.13	SST	CG	N
1.687	42.850	72913	3.50	88.900	1.303	33.096	89.00	15.575	1.575	45.720	163.000	725.024	1.660	42.16	0.218	5.54	8.63	MW	CG	N
1.687	42.850	72913S	3.50	88.900	1.303	33.096	75.00	13.125	1.400	35.560	103.000	458.144	1.660	42.16	0.218	5.54	8.63	SST	CG	N
1.687	42.850	72919	3.50	88.900	1.251	31.775	152.00	26.600	1.600	40.640	242.000	1076.416	1.910	48.51	0.218	5.54	8.75	MW	CG	N
1.687	42.850	72919S	3.50	88.900	1.251	31.775	129.00	22.575	1.200	30.480	149.000	662.752	1.910	48.51	0.218	5.54	8.75	SST	CG	N
1.687	42.850	72927S	3.50	88.900	1.219	30.963	176.00	30.800	0.980	24.892	173.000	769.504	2.050	52.07	0.234	5.94	8.75	SST	CG	N
1.687	42.850	72927	3.50	88.900	1.219	30.963	208.00	36.400	1.412	35.865	294.000	1307.712	2.088	53.04	0.235	5.97	8.80	MW	CG	N
1.687	42.850	72877	4.00	101.600	1.417	35.992	21.00	3.675	2.900	73.660	62.000	275.776	1.080	27.43	0.135	3.43	8.00	MW	CG	N
1.687	42.850	72877S	4.00	101.600	1.417	35.992	18.0													




Century Spring

Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
1.687	42.850	72896	5.00 127.000	1.375 34.925	28.00 4.900	3.300 83.820	95.000 422.560	1.620 41.15	0.156 3.96	10.40	MW CG	N
1.687	42.850	72896S	5.00 127.000	1.375 34.925	24.00 4.200	2.500 63.500	60.000 266.880	1.620 41.15	0.156 3.96	10.40	SST CG	N
1.687	42.850	72908	5.00 127.000	1.333 33.858	44.00 7.700	3.000 76.200	131.000 582.688	2.010 51.05	0.177 4.50	11.40	MW CG	N
1.687	42.850	72908S	5.00 127.000	1.333 33.858	37.00 6.475	2.300 58.420	87.000 386.976	2.010 51.05	0.177 4.50	11.40	SST CG	N
1.687	42.850	72916	5.00 127.000	1.303 33.096	60.00 10.500	2.700 68.580	164.000 729.472	2.260 57.40	0.192 4.88	11.80	MW CG	N
1.687	42.850	72916S	5.00 127.000	1.303 33.096	51.00 8.925	2.000 50.800	103.000 458.144	2.260 57.40	0.192 4.88	11.80	SST CG	N
1.687	42.850	72922	5.00 127.000	1.251 31.775	102.00 17.850	2.400 60.960	243.000 1080.864	2.620 66.55	0.218 5.54	12.00	MW CG	N
1.687	42.850	72922S	5.00 127.000	1.251 31.775	87.00 15.225	1.700 43.180	149.000 662.752	2.620 66.55	0.218 5.54	12.00	SST CG	N
1.687	42.850	72930S	5.00 127.000	1.219 30.963	118.00 20.650	1.500 38.100	173.000 769.504	2.840 72.14	0.234 5.94	12.10	SST CG	N
1.687	42.850	72930	5.00 127.000	1.219 30.963	139.00 24.325	2.109 53.569	293.000 1303.264	2.891 73.43	0.235 5.97	12.10	MW CG	N
1.687	42.850	72923	5.50 139.700	1.251 31.775	91.00 15.925	2.600 66.040	238.000 1058.624	2.890 73.41	0.218 5.54	13.30	MW CG	N
1.687	42.850	72923S	5.50 139.700	1.251 31.775	77.00 13.475	1.900 48.260	149.000 662.752	2.890 73.41	0.218 5.54	13.30	SST CG	N
1.687	42.850	72931S	5.50 139.700	1.219 30.963	106.00 18.550	1.600 40.640	173.000 769.504	3.100 78.74	0.234 5.94	13.30	SST CG	N
1.687	42.850	72931	5.50 139.700	1.219 30.963	125.00 21.875	2.338 59.385	292.000 1298.816	3.162 80.31	0.235 5.97	13.50	MW CG	N
1.687	42.850	72924	6.00 152.400	1.251 31.775	84.00 14.700	2.900 73.660	243.000 1080.864	3.110 78.99	0.218 5.54	14.30	MW CG	N
1.687	42.850	72924S	6.00 152.400	1.251 31.775	71.00 12.425	2.100 53.340	149.000 662.752	3.110 78.99	0.218 5.54	14.30	SST CG	N
1.687	42.850	72932S	6.00 152.400	1.219 30.963	97.00 16.975	1.800 45.720	173.000 769.504	3.360 85.34	0.234 5.94	14.40	SST CG	N
1.687	42.850	72932	6.00 152.400	1.219 30.963	114.00 19.950	2.578 65.481	294.000 1307.712	3.422 86.92	0.235 5.97	14.50	MW CG	N
1.687	42.850	10914	6.31 160.274	1.437 36.500	8.40 1.470	4.500 114.300	37.000 164.576	1.630 41.40	0.125 3.18	13.00	SPR CG	Z
1.687	42.850	4132	6.38 162.052	1.423 36.144	29.00 5.075	1.500 38.100	42.000 186.816	0.920 23.37	0.132 3.35	6.00	SPR C	Z
1.687	42.850	10776	6.63 168.402	1.505 38.227	3.10 0.543	4.800 121.920	15.000 66.720	0.890 22.61	0.091 2.31	9.75	SPR CG	Z
1.687	42.850	3276	6.75 171.450	1.391 35.331	20.00 3.500	2.900 73.660	60.000 266.880	1.620 41.15	0.148 3.76	11.00	SPR CG	Z
1.687	42.850	3480	7.00 177.800	1.437 36.500	8.80 1.540	4.200 106.680	37.000 164.576	1.560 39.62	0.125 3.18	12.50	HD CG	Z
1.687	42.850	1911	7.25 184.150	1.427 36.246	10.00 1.750	4.000 101.600	41.000 182.368	1.650 41.91	0.130 3.30	12.70	SPR CG	Z
1.687	42.850	4011	20.00 508.000	1.477 37.516	1.10 0.193	16.000 406.400	17.000 75.616	4.310 109.47	0.105 2.67	40.00	SPR O	Z
1.703	43.256	10208	0.88 22.352	1.527 38.786	14.00 2.450	0.570 14.478	7.700 34.250	0.310 7.87	0.088 2.24	3.50	SPR CG	Z
1.703	43.256	11835	1.75 44.450	1.547 39.294	4.00 0.700	1.400 35.560	5.500 24.464	0.370 9.40	0.078 1.98	4.75	SST CG	N
1.703	43.256	11842	1.84 46.736	1.593 40.462	1.20 0.210	1.600 40.640	1.800 8.006	0.290 7.37	0.055 1.40	4.25	SST C	N
1.703	43.256	S-3034	4.00 101.600	1.467 37.262	7.20 1.260	2.800 71.120	20.000 88.960	1.240 31.50	0.118 3.00	10.50	SST CG	N
1.703	43.256	S-3109	4.38 111.252	1.453 36.906	9.70 1.698	3.100 78.740	30.000 133.440	1.250 31.75	0.125 3.18	10.00	SST CG	N
1.703	43.256	S-956	4.38 111.252	1.433 36.398	13.00 2.275	3.000 76.200	40.000 177.920	1.350 34.29	0.135 3.43	10.00	SST CG	N
1.703	43.256	1639	7.00 177.800	1.407 35.738	15.00 2.625	3.900 99.060	59.000 262.432	2.220 56.39	0.148 3.76	14.00	SPR C	Z
1.703	43.256	11925	9.25 234.950	1.363 34.620	13.00 2.275	4.700 119.380	62.000 275.776	4.590 116.59	0.170 4.32	27.00	SPR CG	GI
1.703	43.256	10259	10.30 261.620	1.217 30.912	83.00 14.525	2.700 68.580	227.000 1009.696	5.230 132.84	0.243 6.17	21.50	SPR CG	Z
1.703	43.256	12459	20.00 508.000	1.493 37.922	1.10 0.193	16.000 406.400	17.000 75.616	4.230 107.44	0.105 2.67	39.30	SPR O	N
1.718	43.637	S-1481	1.31 33.274	1.574 39.980	3.80 0.665	0.950 24.130	3.600 16.013	0.360 9.14	0.072 1.83	4.00	SST C	N
1.718	43.637	S-1507	5.00 127.000	1.594 40.488	0.71 0.124	4.505 114.427	3.200 14.234	0.495 12.57	0.063 1.59	7.90	SST CG	N
1.718	43.637	3934	5.00 127.000	1.558 39.573	1.70 0.298	4.100 104.140	6.900 30.691	0.880 22.35	0.080 2.03	10.00	SPR C	Z
1.718	43.637	2525	5.00 127.000	1.548 39.319	2.20 0.385	4.100 104.140	8.800 39.142	0.940 23.88	0.085 2.16	10.00	SPR C	Z
1.718	43.637	4337	5.50 139.700	1.094 27.788	57.00 100.975	0.750 19.050	435.000 1934.880	3.280 83.31	0.312 7.92	10.50	SPR CG	Z
1.718	43.637	3176	8.75 222.250	1.500 38.100	4.20 0.735	5.900 149.860	25.000 111.200	1.470 37.34	0.109 2.77	13.00	SPR CG	Z
1.734	44.044	12130	1.56 39.624	1.284 32.614	460.00 80.500	0.390 9.906	178.000 791.744	0.970 24.64	0.225 5.72	4.33	SPR CG	Z
1.734	44.044	1669	2.00 50.800	1.324 33.630	178.00 31.150	0.722 18.339	128.000 569.344	1.280 32.51	0.207 5.26	6.00	SPR CG	Z
1.734	44.044	S-3044	2.25 57.150	1.464 37.186	25.00 4.375	1.400 35.560	37.000 164.576	0.810 20.57	0.135 3.43	6.00	SST CG	N
1.734	44.044	11285	2.38 60.452	1.552 39.421	4.60 0.805	1.700 43.180	8.000 35.584	0.660 16.76	0.091 2.31	6.25	SST C	N
1.734	44.044	10361	2.50 63.500	1.284 32.614	238.00 41.650	0.750 19.050	178.000 791.744	1.460 37.08	0.225 5.72	6.50	SPR CG	Z
1.734	44.044	1595	3.38 85.852	1.010 25.654	1821.00 318.675	0.400 10.160	722.000 3211.456	2.630 66.80	0.362 9.19	7.25	OT CG	Z
1.734	44.044	S-382	3.44 87.376	1.576 40.030	2.10 0.368	2.800 71.120	6.000 26.688	0.630 16.00	0.079 2.01	7.00	SST C	N
1.734	44.044	4191	3.75 95.250	1.414 35.916	30.00 5.250	2.200 55.880	65.000 289.120	1.600 40.64	0.160 4.06	10.00	SPR CG	GI
1.734	44.044	12550	5.47 138.938	1.110 28.194	474.00 82.950	0.910 23.114	431.000 1917.088	3.740 95.00	0.312 7.92	12.00	SPR CG	Z
1.734	44.044	11793	5.47 138.938	1.094 27.788	627.00 109.725	0.740 18.796	464.000 2063.872	3.840 97.54	0.320 8.13	10.50	SPR CG	Z
1.734	44.044	12681	5.50 139.700	1.072 27.229	625.00 109.375	0.820 20.828	510.000 2268.480	3.970 100.84	0.331 8.41	12.00	SPR CG	Z
1.734	44.044	S-967	6.38 162.052	1.574 39.980	1.30 0.228	5.500 139.700	6.900 30.691	0.880 22.35	0.080 2.03	11.00	SST CG	N
1.734	44.044	1946	7.25 184.150	1.484 37.694	8.70 1.523	4.200 106.680	36.000 160.128	1.460 37.08	0.125 3.18	11.70	SPR CG	Z
1.734	44.044	12106	7.81 198.374	1.588 40.335	0.91 0.159	6.900 175.260	6.300 28.022	0.930 23.62	0.073 1.85	11.80	SPR C	Z
1.75	44.450	S-273	0.84 21.336	1.396 35.458	214.00 37.450	0.220 5.588	48.000 213.504	0.620 15.75	0.177 4.50	3.50	SST CG	N
1.75	44.450	S-41	1.00 25.400	1.396 35.458	315.00 55.125	0.270 6.858	84.000 373.632	0.530 13.46	0.177 4.50	3.00	SST CG	N
1.75	44.450	3331	1.44 36.576	1.184 30.074	1460.00 255.500	0.230 5.842	333.000 1481.184	1.130 28.70	0.283 7.19	4.00	SPR CG	Z
1.75	44.450	1799	1.50 38.100	1.454 36.932	56.00 9.800	0.760 19.304	42.000 186.816	0.740 18.80	0.148 3.76	5.00	HD CG	Z
1.75	44.450	1633	1.50 38.100	1.396 35.458	121.00 21.175	0.620 15.748	74.000 329.152	0.890 22.61	0.177 4.50	5.00	HD CG	N
1.75	44.450	1919	1.63 41.402	1.454 36.932	96.00 16.800	0.600 15.240	58.000 257.984	0.700 17.78	0.148 3.76	3.75	SPR C	Z




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fnsh								
1.75	44.450	3194	7.31	185.674	1.454	36.932	14.00	2.450	4,200	106,680	58,000	257.984	2,060	52.32	0.148	3.76	14.00	SPR	CG	Z
1.75	44.450	1677	7.50	190.500	1.310	33.274	63.00	11.025	2,600	66,040	164,000	729.472	3,560	90.42	0.218	5.54	16.30	SPR	CG	Z
1.75	44.450	4323	8.00	203.200	1.606	40.792	0.82	0.144	7,100	180.340	5,800	25.798	0.940	23.88	0.072	1.83	12.00	SPR	C	Z
1.75	44.450	1779	10.00	254.000	1.426	36.220	14.00	2.450	5,300	134.620	73,000	324.704	3,400	86.36	0.162	4.11	20.00	HD	C	Z
1.75	44.450	847	10.00	254.000	1.396	35.458	19.00	3.325	5,100	129.540	95,000	422,560	3,760	95.50	0.177	4.50	21.30	HD	CG	Z
1.75	44.450	853	12.00	304.800	1.426	36.220	11.00	1.925	6,500	165.100	73,000	324.704	4,050	102.87	0.162	4.11	24.00	HD	C	Z
1.75	44.450	844	12.00	304.800	1.366	34.696	21.00	3.675	5,500	139.700	115,000	511.520	5,140	130.56	0.192	4.88	26.80	HD	CG	Z
1.75	44.450	805	12.00	304.800	1.336	33.934	28.00	4.900	5,100	129.540	144,000	640.512	5,690	144.53	0.207	5.26	27.50	HD	CG	Z
1.75	44.450	836	12.00	304.800	1.300	33.020	39.00	6.825	4,500	114.300	177,000	787.296	6,410	162.81	0.225	5.72	28.50	HD	CG	Z
1.75	44.450	4047	21.80	553.720	1.300	33.020	31.00	5.425	5,800	147.320	177,000	787.296	8,100	205.74	0.225	5.72	36.00	SPR	CG	Z
1.765	44.831	S-126	0.75	19.050	1.525	38.735	58.00	10.150	0.390	9.906	23,000	102.304	0.360	9.14	0.120	3.05	3.00	SST	CG	N
1.765	44.831	11144	1.25	31.750	1.441	36.601	120.00	21.000	0.600	15.240	72,000	320.256	0.650	16.51	0.162	4.11	4.00	SPR	CG	Z
1.765	44.831	B18-203	1.75	44.450	1.527	38.786	26.00	4.550	1,200	30.480	31,000	137.888	0.540	13.72	0.119	3.02	4.50	SPR	CG	N
1.765	44.831	11989	1.84	46.736	1.421	36.093	156.00	27.300	0.560	14.224	87,000	386.976	0.690	17.53	0.172	4.37	4.00	SPR	CG	Z
1.765	44.831	11892	2.91	73.914	1.331	33.807	172.00	30.100	0.950	24.130	164,000	729.472	1,520	38.61	0.217	5.51	7.00	SPR	CG	N
1.765	44.831	3006	3.13	79.502	1.631	41.427	1.20	0.210	2,600	66.040	3,200	14,234	0.520	13.21	0.067	1.70	6.75	SPR	C	Z
1.781	45.237	S-3175	1.25	31.750	1.599	40.615	18.00	3.150	0.740	18.796	13,000	57.824	0.270	6.86	0.091	2.31	3.00	SST	CG	N
1.781	45.237	S-1276	1.31	33.274	1.599	40.615	12.00	2.100	0.900	22.860	11,000	48.928	0.410	10.41	0.091	2.31	3.50	SST	C	N
1.781	45.237	3029	1.38	35.052	1.599	40.615	6.10	1.068	0.890	22.606	5,500	24.464	0.490	12.45	0.091	2.31	5.33	SPR	CG	N
1.781	45.237	2697	1.44	36.576	1.257	31.928	1933.00	338.275	0.140	3.556	262,000	1165.376	0.790	20.07	0.262	6.65	3.00	HD	CG	Z
1.781	45.237	3303	1.88	47.752	1.157	29.388	1878.00	328.650	0.220	5.588	423,000	1881.504	1,430	36.32	0.312	7.92	4.30	SPR	CG	Z
1.781	45.237	1687	2.00	50.800	1.485	37.719	53.00	9.275	1,100	27.940	57,000	253.536	0.740	18.80	0.148	3.76	5.00	SPR	CG	Z
1.781	45.237	S-1528	3.00	76.200	1.541	39.141	14.00	2.450	2,000	50.800	29,000	128.992	0.720	18.29	0.120	3.05	6.00	SST	CG	N
1.781	45.237	11609	3.53	89.662	1.309	33.249	161.00	28.175	1,100	27.940	170,000	756.160	2,480	62.99	0.236	5.99	9.50	SPR	CG	Z
1.781	45.237	S-227	4.25	107.950	1.621	41.173	1.80	0.315	3,600	91.440	6,500	28.912	0.690	17.53	0.080	2.03	7.67	SST	C	N
1.781	45.237	2930	4.56	115.824	1.531	38.887	13.00	2.275	2,800	71.120	35,000	155.680	1,040	26.42	0.125	3.18	8.25	SPR	CG	Z
1.781	45.237	S-1638	5.19	131.826	1.563	39.700	4.80	0.840	4,000	101.600	19,000	84.512	1,200	30.48	0.109	2.77	10.00	SST	C	N
1.781	45.237	3419	5.75	146.050	1.367	34.722	68.00	11.900	2,100	53.340	142,000	631.616	2,480	62.99	0.207	5.26	12.00	SPR	CG	Z
1.781	45.237	S-1005	6.75	171.450	1.557	39.548	6.00	1.050	3,800	96.520	23,000	102.304	1,010	25.65	0.112	2.84	9.00	SST	CG	N
1.781	45.237	S-3083	16.00	406.400	1.511	38.379	3.40	0.595	9,800	248.920	32,900	416.339	4,010	101.85	0.135	3.43	29.70	SST	CG	N
1.796	45.618	4153	3.00	76.200	1.662	42.215	1.40	0.245	2,500	63.500	3,500	15,568	0.470	11.94	0.067	1.70	6.00	SPR	C	Z
1.796	45.618	12168	3.47	88.138	1.310	33.274	198.00	34.650	1,100	27.940	221,000	983.008	2,210	56.13	0.243	6.17	8.80	HD	CG	Z
1.796	45.618	10906	3.50	88.900	1.530	38.862	12.00	2.100	2,600	66.040	31,000	137.888	0.860	21.84	0.133	3.38	6.50	PB	CG	N
1.796	45.618	B17-198	4.00	101.600	1.640	41.656	1.50	0.263	3,300	83.820	4,800	21.350	0.730	18.54	0.078	1.98	8.33	SST	C	N
1.796	45.618	3494	4.38	111.252	1.296	32.918	190.00	33.250	1,200	30.480	235,000	1045.280	2,500	63.50	0.250	6.35	10.00	SPR	CG	Z
1.796	45.618	S-983	5.00	127.000	1.472	37.389	38.00	6.650	1,700	43.180	63,000	280.224	1,170	29.72	0.162	4.11	7.25	SST	CG	N
1.796	45.618	11854	6.50	165.100	1.576	40.030	6.30	1.103	3,800	96.520	24,000	106.752	0.990	25.15	0.110	2.79	9.00	SPR	CG	N
1.796	45.618	1621	11.00	279.400	1.416	35.966	23.00	4.025	4,800	121.920	109,000	484.832	4,180	106.17	0.190	4.83	22.00	HD	CG	Z
1.812	46.025	11994	1.25	31.750	1.516	38.506	75.00	13.125	0.660	16.764	49,000	217.952	0.590	14.99	0.148	3.76	4.00	SPR	CG	Z
1.812	46.025	2758	2.31	58.674	1.542	39.167	22.00	3.850	1,400	35.560	29,000	128.992	0.960	24.38	0.135	3.43	7.00	SPR	CG	Z
1.812	46.025	1583	3.03	76.962	1.692	42.977	0.69	0.121	2,600	66.040	1,800	8.006	0.480	12.19	0.060	1.52	7.00	SPR	C	Z
1.812	46.025	4349	3.25	82.550	1.542	39.167	20.00	3.500	2,100	53.340	42,000	186.816	0.950	24.13	0.135	3.43	7.00	SPR	CG	Z
1.812	46.025	11115	3.34	84.836	1.342	34.087	186.00	32.550	1,000	25.400	194,000	682.912	1,880	47.75	0.235	5.97	8.00	SPR	CG	Z
1.812	46.025	S-3171	3.38	85.852	1.362	34.595	160.00	28.000	0.900	22.860	144,000	640.512	1,800	45.72	0.225	5.72	7.00	SST	CG	N
1.812	46.025	10478	3.50	88.900	1.342	34.087	194.00	33.950	1,000	25.400	194,000	862.912	1,820	46.23	0.235	5.97	7.75	SPR	CG	Z
1.812	46.025	3081	6.00	152.400	1.428	36.271	51.00	8.925	2,200	55.880	112,000	498.176	2,110	53.59	0.192	4.88	11.00	SPR	CG	Z
1.812	46.025	3298	6.00	152.400	1.392	35.357	68.00	11.900	2,100	53.340	145,000	644.960	2,520	64.01	0.210	5.33	12.00	SPR	CG	Z
1.812	46.025	10990	6.50	165.100	1.428	36.271	50.00	8.750	2,200	55.880	112,000	498.176	2,160	54.86	0.192	4.88	11.30	HD	CG	Z
1.812	46.025	1523	10.40	264.160	1.392	35.357	34.00	5.950	4,300	109.220	145,000	644.960	4,620	117.35	0.210	5.33	22.00	HD	CG	Z
1.812	46.025	386	10.50	266.700	1.398	35.509	32.00	5.600	4,400	111.760	139,000	618.272	4,550	115.57	0.207	5.26	22.00	HD	CG	Z
1.828	46.431	12075	1.41	35.814	1.474	37.440	105.00	18.375	0.520	13.208	54,000	240.192	0.890	22.61	0.177	4.50	5.00	SPR	CG	Z
1.828	46.431	S-1193	1.44	36.576	1.618	41.097	15.00	2.625	1,000	25.400										




Century Spring

Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
1.875	47.625	11519	5.03	127.762	1.637	41.580	8.90	1.558	3.300	83.820	29.000	128.992	1.070	27.18	0.119	3.02	8.00	SPR CG Z
1.875	47.625	10360	5.50	139.700	1.649	41.885	6.10	1.068	4.100	104.140	25.000	111.200	1.020	25.91	0.113	2.87	9.00	SPR CG Z
1.875	47.625	4188	7.75	196.850	1.521	38.633	29.00	5.075	3.100	78.740	89.000	395.872	2.120	53.85	0.177	4.50	12.00	SPR CG GI
1.875	47.625	2868	8.25	209.550	1.773	45.034	0.22	0.039	7.700	195.580	1.700	7.562	0.520	13.21	0.051	1.30	9.00	MW C Z
1.875	47.625	4338	11.50	292.100	1.425	36.195	59.00	10.325	3.200	81.280	187.000	831.776	3.600	91.44	0.225	5.72	16.00	OT CG Z
1.875	47.625	4077	15.50	393.700	1.425	36.195	32.00	5.600	5.300	134.620	166.000	738.368	6.300	160.02	0.225	5.72	28.00	SPR CG N
1.89	48.006	12504	0.75	19.050	1.646	41.808	58.00	10.150	0.380	9.652	22.000	97.856	0.370	9.40	0.122	3.10	3.00	SPR CG Z
1.89	48.006	11834	1.28	32.512	1.594	40.488	58.00	10.150	0.690	17.526	40.000	177.920	0.590	14.99	0.148	3.76	4.00	SST CG N
1.89	48.006	S-176	2.00	50.800	1.680	42.672	8.90	1.558	1.500	38.100	13.000	57.824	0.530	13.46	0.105	2.67	5.00	SST CG N
1.89	48.006	S-1615	4.00	101.600	1.324	33.630	263.00	46.025	0.967	24.562	254.000	1129.792	2.603	66.12	0.282	7.16	9.20	SST CG N
1.89	48.006	4131	4.13	104.902	1.620	41.148	24.00	4.200	1.700	43.180	41.000	182.368	0.830	21.08	0.135	3.43	6.00	SPR CG Z
1.89	48.006	S-3051	4.25	107.950	1.640	41.656	11.00	1.925	2.900	73.660	30.000	133.440	1.030	26.16	0.125	3.18	7.25	SST C N
1.89	48.006	3434	5.00	127.000	1.476	37.490	76.00	13.300	1.800	45.720	134.000	596.032	1.910	48.51	0.207	5.26	9.25	SPR CG GI
1.89	48.006	S-3225	5.13	130.302	1.526	38.760	28.00	4.900	2.800	71.120	79.000	351.392	2.180	55.37	0.182	4.62	12.00	SST CG N
1.906	48.412	3108	1.19	30.226	1.772	45.009	3.10	0.543	0.890	22.606	2.800	12.454	0.300	7.62	0.067	1.70	3.50	SPR C Z
1.906	48.412	S-3253	1.41	35.814	1.726	43.840	9.30	1.628	1.000	25.400	9.300	41.366	0.410	10.41	0.090	2.29	3.50	SST CG N
1.906	48.412	11359	1.63	41.402	1.420	36.068	727.00	127.225	0.280	7.112	205.000	911.840	0.850	21.59	0.243	6.17	3.50	SPR CG Z
1.906	48.412	S-1688	1.75	44.450	1.722	43.739	6.00	1.050	1.300	33.020	8.000	35.584	0.410	10.41	0.092	2.34	4.50	SST CG N
1.906	48.412	1867	1.75	44.450	1.666	42.316	26.00	4.550	1.100	27.940	29.000	128.992	0.480	12.19	0.120	3.05	4.00	HD CG Z
1.906	48.412	12053	1.78	45.212	1.680	42.672	14.00	2.450	1.100	27.940	15.000	66.720	0.680	17.27	0.113	2.87	5.00	SPR C N
1.906	48.412	S-378	1.78	45.212	1.656	42.062	22.00	3.850	1.100	27.940	24.000	106.752	0.690	17.53	0.125	3.18	4.50	SST CG N
1.906	48.412	S-952	1.97	50.038	1.582	40.183	65.00	11.375	0.920	23.368	60.000	266.880	0.730	18.54	0.162	4.11	4.50	SST CG N
1.906	48.412	1667	2.59	65.786	1.182	30.023	2439.00	426.825	0.270	6.858	668.000	2971.264	1.720	43.69	0.362	9.19	4.75	OT CG Z
1.906	48.412	11574	2.63	66.802	1.610	40.894	32.00	5.600	1.600	40.640	50.000	222.400	1.040	26.42	0.148	3.76	6.00	SPR CG N
1.906	48.412	S-957	2.75	69.850	1.582	40.183	36.00	6.300	1.700	43.180	60.000	266.880	1.050	26.67	0.162	4.11	6.50	SST CG N
1.906	48.412	S-184	3.13	79.502	1.582	40.183	41.00	7.175	1.500	38.100	60.000	266.880	0.970	24.64	0.162	4.11	6.00	SST CG N
1.906	48.412	4165	4.00	101.600	1.636	41.554	15.00	2.625	2.700	68.580	40.000	177.920	1.050	26.67	0.135	3.43	7.75	SPR CG Z
1.906	48.412	1835	4.00	101.600	1.622	41.199	28.00	4.900	2.300	58.420	66.000	293.568	0.820	20.83	0.142	3.61	5.75	MW CG Z
1.906	48.412	S-978	4.25	107.950	1.636	41.554	14.00	2.450	2.600	66.040	36.000	160.128	0.990	25.15	0.135	3.43	7.33	SST CG N
1.906	48.412	3281	6.13	155.702	1.420	36.068	141.00	24.675	1.400	35.560	205.000	911.840	2.450	62.23	0.243	6.17	10.00	SPR CG Z
1.906	48.412	3148	7.00	177.800	1.532	38.913	35.00	6.125	2.800	71.120	99.000	440.352	2.260	57.40	0.187	4.75	12.00	SPR CG Z
1.906	48.412	3417	7.50	190.500	1.340	34.036	160.00	28.000	1.900	48.260	309.000	1374.432	4.390	111.51	0.283	7.19	15.50	SPR CG Z
1.906	48.412	10088	8.75	222.250	1.562	39.675	21.00	3.675	3.800	96.520	81.000	360.288	2.320	58.93	0.172	4.37	13.50	SPR CG Z
1.906	48.412	3098	9.31	236.474	1.456	36.982	48.00	8.400	3.400	86.360	163.000	725.024	4.110	104.39	0.225	5.72	18.30	SPR CG Z
1.921	48.793	3142	0.75	19.050	1.721	43.713	24.00	4.200	0.450	11.430	11.000	48.928	0.300	7.62	0.100	2.54	3.00	SPR CG Z
1.921	48.793	3330	1.00	25.400	1.731	43.967	19.00	3.325	0.720	18.288	14.000	62.272	0.290	7.37	0.095	2.41	3.00	SPR CG Z
1.921	48.793	11861	1.66	42.164	1.609	40.869	92.00	16.100	0.580	14.732	53.000	235.744	0.550	13.97	0.156	3.96	3.50	SST CG N
1.921	48.793	S-988	1.69	42.926	1.597	40.564	47.00	8.225	0.820	20.828	39.000	173.472	0.860	21.84	0.162	4.11	5.33	SST CG N
1.921	48.793	S-941	2.25	57.150	1.739	44.171	4.70	0.823	1.700	43.180	7.900	35.139	0.550	13.97	0.091	2.31	5.00	SST C N
1.921	48.793	3310	4.25	107.950	1.651	41.935	14.00	2.450	2.900	73.660	40.000	177.920	1.080	27.43	0.135	3.43	8.00	SPR CG Z
1.921	48.793	S-379	4.25	107.950	1.651	41.935	9.10	1.593	2.900	73.660	26.000	115.648	1.350	34.29	0.135	3.43	10.00	SST CG N
1.921	48.793	11505	8.75	222.250	1.577	40.056	21.00	3.675	3.900	99.060	80.000	355.840	2.460	62.28	0.172	4.37	13.30	SPR CG Z
1.921	48.793	4054	22.50	571.500	1.471	37.363	18.00	3.150	9.000	228.600	162.000	720.576	10.100	256.54	0.225	5.72	44.00	SPR C Z
1.937	49.200	12114	1.50	38.100	1.563	39.700	109.00	19.075	0.570	14.478	62.000	275.776	0.940	23.88	0.187	4.75	5.00	SPR CG Z
1.937	49.200	72933	2.00	50.800	1.641	41.681	52.00	9.100	1.400	35.560	70.000	311.360	0.650	16.51	0.148	3.76	4.38	MW CG N
1.937	49.200	72933S	2.00	50.800	1.641	41.681	44.00	7.700	1.100	27.940	47.000	209.056	0.650	16.51	0.148	3.76	4.38	SST CG N
1.937	49.200	72942	2.00	50.800	1.625	41.275	64.00	11.200	1.300	33.020	83.000	369.184	0.680	17.27	0.156	3.96	4.38	MW CG N
1.937	49.200	72942S	2.00	50.800	1.625	41.275	54.00	9.450	0.970	24.638	53.000	235.744	0.680	17.27	0.156	3.96	4.38	SST CG N
1.937	49.200	72959	2.00	50.800	1.613	40.970	71.00	12.425	1.300	33.020	90.000	400.320	0.730	18.54	0.162	4.11	4.50	MW CG N
1.937	49.200	72959S	2.00	50.800	1.613	40.970	60.00	10.500	0.980	24.892	59.000	262.432	0.730	18.54	0.162	4.11	4.50	SST CG N
1.937	49.200	72976	2.00	50.800	1.553	39.446	106.00	18.550	0.860	21.844	90.000	400.320	0.960	24.38	0.192	4.88	5.00	MW CG N
1.937	49.200	72934	2.50	63.500	1.641	41.681	40.00	7.000	1.800	45.720	70.000	311.360	0.740	18.80	0.148	3.76	5.00	MW CG N
1.937	49.200	72934S	2.50	63.500	1.641	41.681	34.00	5.950	1.400	35.560	47.000	209.056	0.740	18.80	0.148	3.76	5.00	SST CG N
1.937	49.200	72944	2.50	63.500	1.625	41.275	49.00	8.575	1.700	43.180	83.000	369.184	0.800	20.32	0.156	3.96	5.13	MW CG N
1.937	4																	




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h
1.937	49.200	729785	3.00 76.200	1.553 39.446	70.00 12.250	1.300 33.020	90.000 400.320	1.250 31.75	0.192 4.88	6.50	SST	CG N
1.937	49.200	729866	3.00 76.200	1.523 38.684	118.00 20.650	1.600 40.640	185.000 822.880	1.320 33.53	0.207 5.26	6.38	MW	CG N
1.937	49.200	729865	3.00 76.200	1.523 38.684	100.00 17.500	1.100 27.940	113.000 502.624	1.320 33.53	0.207 5.26	6.38	SST	CG N
1.937	49.200	729966	3.00 76.200	1.487 37.770	156.00 27.300	1.500 38.100	229.000 1018.592	1.520 38.61	0.225 5.72	6.75	MW	CG N
1.937	49.200	729965	3.00 76.200	1.487 37.770	133.00 23.275	1.000 25.400	136.000 604.928	1.520 38.61	0.225 5.72	6.75	SST	CG N
1.937	49.200	730101	3.00 76.200	1.437 36.500	237.00 41.475	1.300 33.020	304.000 1352.192	1.720 43.69	0.250 6.35	6.88	MW	CG N
1.937	49.200	729316	3.00 76.200	1.437 36.500	202.00 35.350	0.910 23.114	184.000 818.432	1.720 43.69	0.250 6.35	6.88	SST	CG N
1.937	49.200	729315	3.50 88.900	1.641 41.681	27.00 4.725	2.600 66.040	70.000 311.360	0.940 23.88	0.148 3.76	6.38	MW	CG N
1.937	49.200	729365	3.50 88.900	1.641 41.681	23.00 4.025	2.000 50.800	47.000 209.056	0.940 23.88	0.148 3.76	6.38	SST	CG N
1.937	49.200	72948	3.50 88.900	1.625 41.275	34.00 5.950	2.500 63.500	83.000 369.184	1.010 25.65	0.156 3.96	6.50	MW	CG N
1.937	49.200	729483	3.50 88.900	1.625 41.275	29.00 5.075	1.800 45.720	53.000 235.744	1.010 25.65	0.156 3.96	6.50	SST	CG N
1.937	49.200	72962	3.50 88.900	1.613 40.970	37.00 6.475	2.400 60.960	90.000 400.320	1.090 27.69	0.162 4.11	6.75	MW	CG N
1.937	49.200	729625	3.50 88.900	1.613 40.970	32.00 5.600	1.900 48.260	59.000 262.432	1.090 27.69	0.162 4.11	6.75	SST	CG N
1.937	49.200	72969	3.50 88.900	1.583 40.208	51.00 8.925	2.200 55.880	114.000 507.072	1.260 32.00	0.177 4.50	7.13	MW	CG N
1.937	49.200	729695	3.50 88.900	1.583 40.208	43.00 7.525	1.800 45.720	77.000 342.496	1.260 32.00	0.177 4.50	7.13	SST	CG N
1.937	49.200	S-3160	3.50 88.900	1.583 40.208	47.00 8.225	1.600 40.640	77.000 342.496	1.190 30.23	0.177 4.50	6.75	SST	CG N
1.937	49.200	72979	3.50 88.900	1.553 39.446	69.00 12.075	2.100 53.340	143.000 636.064	1.420 36.07	0.192 4.88	7.38	MW	CG N
1.937	49.200	729795	3.50 88.900	1.553 39.446	58.00 10.150	1.500 38.100	90.000 400.320	1.420 36.07	0.192 4.88	7.38	SST	CG N
1.937	49.200	72987	3.50 88.900	1.523 38.684	95.00 16.625	1.900 48.260	185.000 822.880	1.530 38.86	0.207 5.26	7.38	MW	CG N
1.937	49.200	729875	3.50 88.900	1.523 38.684	81.00 14.175	1.400 35.560	113.000 502.624	1.530 38.86	0.207 5.26	7.38	SST	CG N
1.937	49.200	72998	3.50 88.900	1.487 37.770	131.00 22.925	1.800 45.720	229.000 1018.592	1.720 43.69	0.225 5.72	7.63	MW	CG N
1.937	49.200	729985	3.50 88.900	1.487 37.770	111.00 19.425	1.200 30.480	136.000 604.928	1.720 43.69	0.225 5.72	7.63	SST	CG N
1.937	49.200	73011	3.50 88.900	1.437 36.500	198.00 34.650	1.500 38.100	303.000 1347.744	1.970 50.04	0.250 6.35	7.88	MW	CG N
1.937	49.200	730115	3.50 88.900	1.437 36.500	168.00 29.400	1.100 27.940	184.000 818.432	1.970 50.04	0.250 6.35	7.88	SST	CG N
1.937	49.200	72937	4.00 101.600	1.641 41.681	24.00 4.200	2.900 73.660	70.000 311.360	1.050 26.67	0.148 3.76	7.13	MW	CG N
1.937	49.200	729375	4.00 101.600	1.641 41.681	20.00 3.500	2.300 58.420	47.000 209.056	1.050 26.67	0.148 3.76	7.13	SST	CG N
1.937	49.200	72950	4.00 101.600	1.625 41.275	29.00 5.075	2.900 73.660	83.000 369.184	1.110 28.19	0.156 3.96	7.13	MW	CG N
1.937	49.200	729505	4.00 101.600	1.625 41.275	25.00 4.375	2.100 53.340	53.000 235.744	1.110 28.19	0.156 3.96	7.13	SST	CG N
1.937	49.200	72963	4.00 101.600	1.613 40.970	32.00 5.600	2.800 71.120	90.000 400.320	1.220 30.99	0.162 4.11	7.50	MW	CG N
1.937	49.200	729635	4.00 101.600	1.613 40.970	27.00 4.725	2.200 55.880	59.000 262.432	1.220 30.99	0.162 4.11	7.50	SST	CG N
1.937	49.200	72970	4.00 101.600	1.583 40.208	44.00 7.700	2.600 66.040	115.000 511.520	1.390 35.31	0.177 4.50	7.88	MW	CG N
1.937	49.200	729705	4.00 101.600	1.583 40.208	37.00 6.475	2.000 50.800	77.000 342.496	1.390 35.31	0.177 4.50	7.88	SST	CG N
1.937	49.200	72980	4.00 101.600	1.553 39.446	59.00 10.325	2.400 60.960	143.000 636.064	1.580 40.13	0.192 4.88	8.25	MW	CG N
1.937	49.200	729805	4.00 101.600	1.553 39.446	50.00 8.750	1.800 45.720	90.000 400.320	1.580 40.13	0.192 4.88	8.25	SST	CG N
1.937	49.200	72988	4.00 101.600	1.523 38.684	82.00 14.350	2.300 58.420	185.000 822.880	1.710 43.43	0.207 5.26	8.25	MW	CG N
1.937	49.200	729885	4.00 101.600	1.523 38.684	70.00 12.250	1.600 40.640	113.000 502.624	1.710 43.43	0.207 5.26	8.25	SST	CG N
1.937	49.200	73000	4.00 101.600	1.487 37.770	112.00 19.600	2.000 50.800	229.000 1018.592	1.910 48.51	0.225 5.72	8.50	MW	CG N
1.937	49.200	730005	4.00 101.600	1.487 37.770	95.00 16.625	1.400 35.560	136.000 604.928	1.910 48.51	0.225 5.72	8.50	SST	CG N
1.937	49.200	73012	4.00 101.600	1.437 36.500	169.00 29.575	1.800 45.720	302.000 1343.296	2.220 56.39	0.250 6.35	8.88	MW	CG N
1.937	49.200	730125	4.00 101.600	1.437 36.500	144.00 25.200	1.300 33.020	184.000 818.432	2.220 56.39	0.250 6.35	8.88	SST	CG N
1.937	49.200	3420	4.44 112.776	1.371 34.823	254.00 44.450	1.200 30.480	304.000 1352.192	2.830 71.88	0.283 7.19	10.00	SPR	CG BO
1.937	49.200	72938	4.50 114.300	1.641 41.681	21.00 3.675	3.400 86.360	70.000 311.360	1.150 29.21	0.148 3.76	7.75	MW	CG N
1.937	49.200	729385	4.50 114.300	1.641 41.681	18.00 3.150	2.600 66.040	47.000 209.056	1.150 29.21	0.148 3.76	7.75	SST	CG N
1.937	49.200	72952	4.50 114.300	1.625 41.275	26.00 4.550	3.200 81.280	83.000 369.184	1.230 31.24	0.156 3.96	7.88	MW	CG N
1.937	49.200	729525	4.50 114.300	1.625 41.275	22.00 3.850	2.400 60.960	53.000 235.744	1.230 31.24	0.156 3.96	7.88	SST	CG N
1.937	49.200	72964	4.50 114.300	1.613 40.970	28.00 4.900	3.200 81.280	90.000 400.320	1.340 34.04	0.162 4.11	8.25	MW	CG N
1.937	49.200	729645	4.50 114.300	1.613 40.970	24.00 4.200	2.400 60.960	59.000 262.432	1.340 34.04	0.162 4.11	8.25	SST	CG N
1.937	49.200	72971	4.50 114.300	1.583 40.208	39.00 6.825	3.000 76.200	115.000 511.520	1.530 38.86	0.177 4.50	8.63	MW	CG N
1.937	49.200	729715	4.50 114.300	1.583 40.208	33.00 5.775	2.300 58.420	77.000 342.496	1.530 38.86	0.177 4.50	8.63	SST	CG N
1.937	49.200	72981	4.50 114.300	1.553 39.446	52.00 9.100	2.800 71.120	144.000 640.512	1.730 43.94	0.192 4.88	9.00	MW	CG N
1.937	49.200	729815	4.50 114.300	1.553 39.446	44.00 7.700	2.000 50.800	90.000 400.320	1.730 43.94	0.192 4.88	9.00	SST	CG N
1.937	49.200	72989	4.50 114.300	1.523 38.684	72.00 12.600	2.600 66.040	185.000 822.880	1.890 48.01	0.207 5.26	9.13	MW	CG N
1.937	49.200	729895	4.50 114.300	1.523 38.684	61.00 10.675	1.800 45.720	113.000 502.624	1.890 48.01	0.207 5.26	9.13	SST	CG N
1.937	49.200	73002	4.50 114.300	1.487 37.770	98.00 17.150	2.300 58.420	229.000 1018.592	2.140 54.36	0.225 5.72	9.50	MW	CG N
1.937	49.200	730025	4.50 114.300	1.487 37.770	84.00 14.700	1.600 40.640	136.000 604.928	2.140 54.36	0.225 5.72	9.50	SST	CG N
1.937	49.200	73013	4.50 114.300	1.437 36.500	148.00 25.900	2.000 50.800	301.000 1338.848	2.470 62.74	0.250 6.35	9.88	MW	CG N
1.937	49.200	730135	4.50 114.300	1.437 36.500	126.00 22.050	1.500 38.100	184.000 818.432	2.470 62.74	0.250 6.35	9.88	SST	CG N
1.937	49.200	72939	5.00 127.000	1.641 41.681	19.00 3.325	3.700 93.980	70.000 311.360	1.260 32.00	0.148 3.76	8.50	MW	CG N
1.937	49.200	729395	5.00 127.000	1.641 41.681	16.00 2.800	3.000 76.200	47.000 209.056	1.260 32.00	0.148 3.76	8.50	SST	CG N
1.937	49.200	72954	5.00 127.000	1.625 41.275	23.00 4.025	3.600 91.440	83.000 369.184	1.330 33.78	0.156 3.96	8.50	MW	CG N
1.937	49.200	729545	5.00 127.000	1.625 41.275	20.00 3.500	2.700 68.580	53.000 235.744</td					




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
1.937	49.200	72973S	5.50 139.700	1.583 40.208	27.00 4.725	2.900 73.660	77.000 342.496	1.810 45.97	0.177 4.50	10.30	SST CG	N
1.937	49.200	72983	5.50 139.700	1.553 39.446	42.00 7.350	3.400 86.360	144.000 640.512	2.060 52.32	0.192 4.88	10.80	MW CG	N
1.937	49.200	72983S	5.50 139.700	1.553 39.446	36.00 6.300	2.500 63.500	90.000 400.320	2.060 52.32	0.192 4.88	10.80	SST CG	N
1.937	49.200	72991	5.50 139.700	1.523 38.684	58.00 10.150	3.200 81.280	185.000 822.880	2.250 57.15	0.207 5.26	10.90	MW CG	N
1.937	49.200	72991S	5.50 139.700	1.523 38.684	49.00 8.575	2.300 58.420	113.000 502.624	2.250 57.15	0.207 5.26	10.90	SST CG	N
1.937	49.200	73006	5.50 139.700	1.487 37.770	79.00 13.825	2.900 73.660	229.000 1018.592	2.560 65.02	0.225 5.72	11.40	MW CG	N
1.937	49.200	73006S	5.50 139.700	1.487 37.770	67.00 11.725	2.000 50.800	136.000 604.928	2.560 65.02	0.225 5.72	11.40	SST CG	N
1.937	49.200	73015	5.50 139.700	1.437 36.500	119.00 20.825	2.500 63.500	300.000 1334.400	2.970 75.44	0.250 6.35	11.90	MW CG	N
1.937	49.200	73015S	5.50 139.700	1.437 36.500	101.00 17.675	1.800 45.720	184.000 818.432	2.970 75.44	0.250 6.35	11.90	SST CG	N
1.937	49.200	72958	6.00 152.400	1.625 41.275	19.00 3.325	4.400 111.760	83.000 369.184	1.560 39.62	0.156 3.96	10.00	MW CG	N
1.937	49.200	72958S	6.00 152.400	1.625 41.275	16.00 2.800	3.300 83.820	53.000 235.744	1.560 39.62	0.156 3.96	10.00	SST CG	N
1.937	49.200	72974	6.00 152.400	1.583 40.208	29.00 5.075	4.000 101.600	115.000 511.520	1.970 50.04	0.177 4.50	11.10	MW CG	N
1.937	49.200	72974S	6.00 152.400	1.583 40.208	24.00 4.200	3.200 81.280	77.000 342.496	1.970 50.04	0.177 4.50	11.10	SST CG	N
1.937	49.200	72984	6.00 152.400	1.553 39.446	38.00 6.650	3.800 96.520	144.000 640.512	2.230 56.64	0.192 4.88	11.60	MW CG	N
1.937	49.200	72984S	6.00 152.400	1.553 39.446	32.00 5.600	2.800 71.120	90.000 400.320	2.230 56.64	0.192 4.88	11.60	SST CG	N
1.937	49.200	72992	6.00 152.400	1.523 38.684	53.00 9.275	3.500 88.900	185.000 822.880	2.410 61.21	0.207 5.26	11.60	MW CG	N
1.937	49.200	72992S	6.00 152.400	1.523 38.684	45.00 7.875	2.500 63.500	113.000 502.624	2.410 61.21	0.207 5.26	11.60	SST CG	N
1.937	49.200	73008	6.00 152.400	1.487 37.770	72.00 12.600	3.200 81.280	229.000 1018.592	2.760 70.10	0.225 5.72	12.30	MW CG	N
1.937	49.200	73008S	6.00 152.400	1.487 37.770	61.00 10.675	2.200 55.880	136.000 604.928	2.760 70.10	0.225 5.72	12.30	SST CG	N
1.937	49.200	73016	6.00 152.400	1.437 36.500	108.00 18.900	2.800 71.120	302.000 1343.296	3.200 81.28	0.250 6.35	12.80	MW CG	N
1.937	49.200	73016S	6.00 152.400	1.437 36.500	94.00 16.450	1.950 49.530	183.000 818.984	3.200 81.28	0.250 6.35	12.80	SST CG	N
1.937	49.200	S-3191	7.00 177.800	1.711 43.459	3.10 0.543	5.400 137.160	17.000 75.616	1.580 40.13	0.113 2.87	13.00	SST C	N
1.953	49.606	11926	1.50 38.100	1.579 40.107	106.00 18.550	0.570 14.478	60.000 266.880	0.940 23.88	0.187 4.75	5.00	SPR CG	Z
1.953	49.606	12080	1.56 39.624	1.829 46.457	1.30 0.228	1.200 30.480	1.700 7.562	0.330 8.38	0.062 1.57	4.33	SPR C	Z
1.953	49.606	S-3080	1.88 47.752	1.657 42.088	51.00 8.925	0.910 23.114	47.000 209.056	0.590 14.99	0.148 3.76	4.00	SST CG	N
1.953	49.606	S-92	2.75 69.850	1.579 40.107	139.00 24.325	0.600 15.240	83.000 369.184	0.750 19.05	0.187 4.75	4.00	SST CG	N
1.953	49.606	S-380	4.13 104.902	1.683 42.748	12.00 2.100	2.900 73.660	35.000 155.680	1.030 26.16	0.135 3.43	7.67	SST CG	N
1.953	49.606	11985	4.88 123.952	1.641 41.681	15.00 2.625	3.000 76.200	44.000 195.712	1.870 47.50	0.156 3.96	12.00	SPR CG	Z
1.953	49.606	S-3050	5.25 133.350	1.599 40.615	28.00 4.900	2.700 68.580	76.000 338.048	1.730 43.94	0.177 4.50	9.75	SST CG	N
1.953	49.606	3375	5.25 133.350	1.329 33.757	385.00 67.375	1.000 25.400	389.000 173.272	3.120 79.25	0.312 7.92	10.00	SPR CG	Z
1.953	49.606	2687	6.38 162.052	1.599 40.615	19.00 3.325	3.700 93.980	72.000 320.256	2.660 67.56	0.177 4.50	15.00	HD CG	Z
1.953	49.606	S-257	6.38 162.052	1.539 39.091	36.00 6.300	3.100 78.740	112.000 498.176	2.900 73.66	0.207 5.26	14.00	SST CG	N
1.968	49.987	3376	4.00 101.600	1.594 40.488	104.00 18.200	0.920 23.368	96.000 427.008	0.940 23.88	0.187 4.75	5.00	SPR CG	Z
1.968	49.987	12626	4.25 107.950	1.698 43.129	12.00 2.100	3.000 76.200	35.000 155.680	1.050 26.67	0.135 3.43	7.75	SST C	N
1.968	49.987	S-1645	5.50 139.700	1.774 45.060	3.10 0.543	4.600 116.840	14.000 62.272	0.730 18.54	0.097 2.46	7.50	SST CG	N
1.968	49.987	4197	8.00 203.200	1.528 38.811	45.00 7.875	3.300 83.820	149.000 662.752	3.740 95.00	0.225 5.72	16.00	SPR CG	Z
1.968	49.987	12552	8.00 203.200	1.518 38.557	50.00 8.750	3.200 81.280	159.000 707.232	3.600 91.44	0.225 5.72	16.00	HD CG	Z
1.968	49.987	10237	8.00 203.200	1.306 33.172	281.00 49.175	1.600 40.640	458.000 2037.184	5.300 134.62	0.331 8.41	16.00	SPR CG	Z
1.968	49.987	4042	22.00 558.800	1.518 38.557	20.00 3.500	7.800 198.120	159.000 707.232	8.100 205.74	0.225 5.72	36.00	SPR CG	Z
1.984	50.394	3170	1.22 30.988	1.756 44.602	15.00 2.625	0.710 18.034	10.000 44.480	0.510 12.95	0.114 2.90	4.50	SPR CG	Z
1.984	50.394	1681	1.25 31.750	1.744 44.298	23.00 4.025	0.770 19.558	18.000 80.064	0.480 12.19	0.120 3.05	4.00	SPR CG	Z
1.984	50.394	S-3071	1.50 38.100	1.774 45.060	15.00 2.625	1.000 25.400	16.000 71.168	0.470 11.94	0.105 2.67	3.50	SST C	N
1.984	50.394	1875	1.69 42.926	1.704 43.282	88.00 15.400	0.690 17.526	61.000 271.328	0.420 10.67	0.140 3.56	3.00	MW CG	Z
1.984	50.394	4177	2.88 73.152	1.600 40.640	91.00 15.925	1.100 27.940	103.000 458.144	1.100 27.94	0.192 4.88	5.75	SPR CG	Z
2	50.800	S-1243	1.75 44.450	1.550 39.370	229.00 40.075	0.570 14.478	132.000 587.136	1.010 25.65	0.225 5.72	4.50	SST CG	N
2	50.800	S-120	1.88 47.752	1.616 41.046	144.00 25.200	0.610 15.494	88.000 391.424	0.770 19.56	0.192 4.88	4.00	SST CG	N
2	50.800	11050	2.00 50.800	1.514 38.456	370.00 64.750	0.530 13.462	196.000 871.808	1.090 27.69	0.243 6.17	4.50	HD CG	Z
2	50.800	S-1247	2.41 61.214	1.836 46.634	4.60 0.805	2.100 53.340	9.600 42.701	0.330 8.38	0.082 2.08	4.00	MW CG	N
2	50.800	S-365	2.50 63.500	1.876 47.650	0.68 0.119	2.072 52.629	1.400 6.227	0.429 10.90	0.063 1.59	5.90	SST C	N
2	50.800	11991	2.50 63.500	1.620 41.148	74.00 12.950	1.300 33.020	98.000 435.904	1.190 30.23	0.190 4.83	6.25	SPR CG	Z
2	50.800	1795	2.94 74.676	1.730 43.942	23.00 4.025	1.700 43.180	39.000 173.472	0.710 18.03	0.135 3.43	5.25	SPR CG	Z
2	50.800	1673	3.50 88.900	1.550 39.370	125.00 21.875	1.200 30.480	156.000 693.888	1.630 41.40	0.225 5.72	7.25	HD CG	Z
2	50.800	S-1650	3.63 92.202	1.828 46.431	1.90 0.333	3.000 76.200	5.700 25.354	0.620 15.75	0.085 2.16	7.25	SST CG	N
2	50.800	S-982	3.63 92.202	1.626 41.300	73.00 12.775	1.100 27.940	81.000 360.288	1.030 26.16	0.187 4.75	5.50	SST CG	N
2	50.800	4145	4.00 101.600	1.376 34.950	472.00 82.600	0.810 20.574	381.000 1694.688	2.500 63.50	0.312 7.92	8.00	SPR CG	Z
2	50.800	S-461	4.50 114.300	1.614 40.996	45.00 7.875	1.986 50.444	89.000 395.872	1.610 40.89	0.192 4.88	8.40	SST CG	N
2	50.800	S-3113	4.63 117.602	1.676 42.570	17.00 2.975	3.000 76.200	52.000 231.296	1.620 41.15	0.162 4.11	10.00	SST CG	N
2	50.800	1947	5.09 129.286	1.800 45.720	3.90 0.683	4.300 109.220	17.000 75.616	0.840 21.34	0.100 2.54	7.38	SPR C	Z
2	50.800	11446	5.63 143.002	1.750 44.450	5.90 1.033	4.100 104.140	24.000 106.752	1.500 38.10	0.125 3.18	11.00	SPR C	Z
2	50.800	3094	6.13 155.702	1.830 46.482	1.50 0.263	5.400 137.160	8.200 36.474	0.770 19.56	0.085 2.16	9.00	SPR CG	GI
2	50.800	3485	6.50 165.100	1.730 43.942	11.00 1.925	3.400 86.360	39.000 173.472	1.280 32.51	0.135 3.43	8.50	HD C	GI
2	50.800	10441	8.00 203.200	1.550 39.370	51.00 8.925	3.10						




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Ends Mat'l	F n sh
2.046	51.968	3379	3.13 79.502	1.692 42.977	43.00 7.525	1.900 48.260	82.000 364.736	1.240 31.50	0.177 4.50	7.00	SPR CG GI
2.046	51.968	S-1619	3.75 95.250	1.924 48.870	0.75 0.131	3.400 86.360	2.600 11.565	0.310 7.87	0.061 1.55	5.00	SST CG N
2.046	51.968	11607	5.63 143.002	1.785 45.339	6.60 1.155	4.100 104.140	27.000 120.096	1.570 39.88	0.131 3.33	11.00	SPR CG Z
2.046	51.968	4167	7.38 187.452	1.722 43.739	14.00 2.450	4.600 116.840	63.000 280.224	2.070 52.58	0.162 4.11	12.80	SPR CG Z
2.046	51.968	10580	11.00 279.400	1.538 39.065	70.00 12.250	3.100 78.740	218.000 969.664	4.260 108.20	0.254 6.45	16.80	SPR CG N
2.062	52.375	S-1554	1.91 48.514	1.758 44.653	26.00 4.550	1.127 28.626	29.000 128.992	0.783 19.89	0.148 3.76	5.30	SST CG N
2.062	52.375	S-3141	2.13 54.102	1.496 37.998	518.00 90.650	0.454 11.532	235.000 1045.280	1.287 32.69	0.282 7.16	4.60	SST CG N
2.062	52.375	3118	2.25 57.150	1.852 47.041	5.80 1.015	1.600 40.640	9.400 41.811	0.630 16.00	0.105 2.67	6.00	SPR CG Z
2.062	52.375	S-1562	3.19 81.026	1.862 47.295	5.50 0.963	2.700 68.580	15.000 66.720	0.500 12.70	0.100 2.54	5.00	SST CG N
2.062	52.375	S-3238	3.19 81.026	1.738 44.145	30.00 5.250	1.800 45.720	56.000 249.088	1.010 25.65	0.162 4.11	6.25	SST CG N
2.062	52.375	S-3136	3.25 82.550	1.812 46.025	6.00 1.050	2.100 53.340	13.000 57.824	1.130 28.70	0.125 3.18	9.00	SST CG N
2.062	52.375	S-3069	3.50 88.900	1.708 43.383	37.00 6.475	2.000 50.800	72.000 320.256	1.240 31.50	0.177 4.50	7.00	SST CG N
2.062	52.375	S-1019	4.00 101.600	1.792 45.517	15.00 2.625	2.300 58.420	34.000 151.232	0.810 20.57	0.135 3.43	6.00	SST CG N
2.062	52.375	11727	4.97 126.238	1.568 39.827	224.00 39.200	0.890 22.606	200.000 889.600	1.480 37.59	0.247 6.27	6.00	SPR CG Z
2.062	52.375	2986	5.00 127.000	1.738 44.145	25.00 4.375	2.500 63.500	63.000 280.224	1.300 33.02	0.162 4.11	8.00	SPR CG Z
2.062	52.375	S-158	5.00 127.000	1.738 44.145	21.00 3.675	2.700 68.580	56.000 249.088	1.300 33.02	0.162 4.11	8.00	SST CG N
2.062	52.375	11730	5.25 133.350	1.890 48.006	1.50 0.263	4.500 114.300	6.500 28.912	0.770 19.56	0.086 2.18	9.00	SPR CG GI
2.062	52.375	1839	5.50 139.700	1.918 48.717	0.40 0.070	4.400 111.760	1.800 8.006	1.100 27.94	0.072 1.83	14.30	HD C Z
2.062	52.375	11905	7.09 180.086	1.708 43.383	23.00 4.025	3.500 88.900	81.000 360.288	1.950 49.53	0.177 4.50	11.00	SPR CG N
2.062	52.375	3259	8.88 225.552	1.538 39.065	116.00 20.300	2.200 55.880	258.000 1147.584	3.140 79.76	0.262 6.65	12.00	OT CG Z
2.062	52.375	4178	9.00 228.600	1.538 39.065	83.00 14.525	2.800 71.120	229.000 1018.592	4.190 106.43	0.262 6.65	16.00	SPR CG BO
2.062	52.375	3261	9.00 228.600	1.496 37.998	126.00 22.050	2.600 66.040	323.000 1436.704	4.250 107.95	0.283 7.19	15.00	OT CG Z
2.062	52.375	3263	9.19 233.426	1.538 39.065	97.00 16.975	2.700 68.580	258.000 1147.584	3.670 93.22	0.262 6.65	14.00	OT CG Z
2.062	52.375	S-3014	9.75 247.650	1.750 44.450	7.40 1.295	6.700 170.180	50.000 222.400	2.570 65.28	0.156 3.96	16.50	SST CG N
2.078	52.781	12073	1.75 44.450	1.942 49.327	1.20 0.210	1.400 35.560	1.700 7.562	0.350 8.89	0.068 1.73	5.00	SPR CG Z
2.078	52.781	11813	4.34 110.236	1.838 46.685	7.90 1.383	3.400 86.360	27.000 120.096	0.840 21.34	0.120 3.05	7.00	SPR CG Z
2.078	52.781	S-1661	4.44 112.776	1.870 47.498	4.30 0.753	3.747 95.174	16.000 71.168	0.680 17.27	0.105 2.67	6.60	SST CG N
2.094	53.188	3372	1.38 35.052	1.644 41.758	564.00 98.700	0.270 6.858	150.000 667.200	0.680 17.27	0.225 5.72	3.00	SPR CG Z
2.094	53.188	11715	1.75 44.450	1.956 49.682	1.30 0.228	1.400 35.560	1.800 8.006	0.350 8.89	0.069 1.75	5.00	SPR CG GI
2.094	53.188	4298	2.25 57.150	1.854 47.092	14.00 2.450	1.700 43.180	24.000 106.752	0.570 14.48	0.120 3.05	4.75	SPR CG Z
2.094	53.188	11869	2.53 64.262	1.782 45.263	19.00 3.325	1.400 35.560	26.000 115.648	1.170 29.72	0.156 3.96	7.50	SST CG N
2.094	53.188	10400	4.50 114.300	1.798 45.669	17.00 2.975	2.800 71.120	48.000 213.504	1.110 28.19	0.148 3.76	7.50	SPR CG Z
2.109	53.569	3229	1.06 26.924	1.721 43.713	193.00 33.775	0.380 9.652	74.000 329.152	0.680 17.27	0.194 4.93	3.50	SPR CG Z
2.109	53.569	S-389	1.38 35.052	1.585 40.259	703.00 123.025	0.260 6.604	186.000 827.328	0.890 22.61	0.262 6.65	3.38	SST CG N
2.109	53.569	2754	1.50 38.100	1.869 47.473	38.00 6.650	0.980 24.892	37.000 164.576	0.360 9.14	0.120 3.05	3.00	MW CG Z
2.109	53.569	12083	1.66 42.164	1.899 48.235	14.00 2.450	1.300 33.020	18.000 80.064	0.370 9.40	0.105 2.67	3.50	SPR CG Z
2.109	53.569	S-1644	2.06 52.324	1.785 45.339	28.00 4.900	1.000 25.400	29.000 128.992	1.010 25.65	0.162 4.11	6.25	SST CG N
2.109	53.569	3452	2.25 57.150	1.925 48.895	4.20 0.735	1.800 45.720	7.500 33.360	0.460 11.68	0.092 2.34	5.00	SPR CG Z
2.109	53.569	S-1674	2.50 63.500	1.989 50.521	0.55 0.096	1.200 53.340	1.200 5.338	0.390 9.91	0.060 1.52	5.50	SST C N
2.109	53.569	2688	2.88 73.152	1.705 43.307	86.00 15.050	1.300 33.020	112.000 498.176	1.210 30.73	0.202 5.13	6.00	SPR CG Z
2.109	53.569	1615	2.91 73.914	1.321 33.553	1962.00 343.350	0.350 8.890	677.000 3011.296	2.170 55.12	0.394 10.01	5.50	SPR CG Z
2.109	53.569	11849	4.63 117.602	1.917 48.692	3.80 0.665	3.400 86.360	13.000 57.824	0.620 15.75	0.096 2.44	5.50	SST C N
2.109	53.569	S-152	4.84 122.936	1.927 48.946	2.60 0.455	4.300 109.220	11.000 48.928	0.550 13.97	0.091 2.31	6.00	SST CG N
2.109	53.569	S-3023	5.50 139.700	1.749 44.425	17.00 2.975	3.300 83.820	57.000 253.536	2.250 57.15	0.180 4.57	12.50	SST CG N
2.109	53.569	S-3236	6.03 153.162	1.899 48.235	3.80 0.665	4.500 114.300	17.000 75.616	0.810 20.57	0.105 2.67	7.75	SST CG N
2.109	53.569	12627	8.50 215.900	1.649 41.885	56.00 9.800	2.800 71.120	159.000 707.232	2.930 74.42	0.230 5.84	12.80	SPR CG N
2.125	53.975	S-3151	0.69 17.526	1.875 47.625	76.00 13.300	0.250 6.350	19.000 84.512	0.440 11.18	0.125 3.18	2.50	SST C N
2.125	53.975	S-3072	3.63 92.202	1.813 46.050	16.00 2.800	2.400 60.960	38.000 169.024	1.250 31.75	0.156 3.96	8.00	SST CG N
2.125	53.975	10607	5.38 136.652	1.915 48.641	2.10 0.368	4.100 104.140	8.600 38.253	1.260 32.00	0.105 2.67	11.00	SST CG N
2.125	53.975	11860	5.38 136.652	1.899 48.235	5.50 0.963	4.000 101.600	22.000 97.856	0.930 23.62	0.113 2.87	7.25	SPR C N
2.125	53.975	S-3168	5.50 139.700	1.899 48.235	5.00 0.875	4.000 101.600	20.000 88.960	0.790 20.07	0.113 2.87	7.00	SST CG N
2.125	53.975	S-3213	5.66 143.764	1.859 47.219	6.10 1.068	4.224 107.290	26.000 115.648	1.436 36.47	0.135 3.43	10.60	SST CG N
2.125	53.975	12054	6.03 153.162	1.915 48.641	3.30 0.578	5.200 132.080	17.000 75.616	0.810 20.57	0.105 2.67	7.75	SST CG N
2.125	53.975	4332	6.50 165.100	1.511 38.379	202.00 35.350	1.700 43.180	344.000 1530.112	3.840 97.54	0.307 7.80	12.50	SPR CG Z
2.125	53.975	S-1640	6.75 171.450	1.813 46.050	13.00 2.275	3.700 93.980	48.000 213.504	1.480 37.59	0.156 3.96	9.50	SST CG N
2.125	53.975	S-3093	7.00 177.800	1.941 49.301	2.80 0.490	4.000 101.600	11.000 48.928	0.620 15.75	0.092 2.34	5.75	SST C N
2.125	53.975	S-3161	7.00 177.800	1.855 47.117	7.00 1.225	4.700 119.380	33.000 146.784	1.420 36.07	0.135 3.43	9.50	SST C N
2.14	54.356	S-3211	2.34 59.436	1.984 50.394	1.70 0.298	1.900 48.260	3.200 14.234	0.410 10.41	0.078 1.98	5.25	SST CG N
2.14	54.356	S-89	2.63 66.802	1.700 43.180	83.00 14.525	1.150 29.210	95.000 422.560	1.480 37.59	0.218 5.54	6.80	SST CG N
2.14	54.356	S-101	3.13 79.502	1.828 46.431	31.00 5.425	1.600 40.640	48.000 213.504	0.780 19.81	0.156 3.96	5.00	SST CG N
2.14	54.356	S-3073	3.25 82.550	1.766 44.856	34.00 5.950	1.800 45.720	60.000 266.880	1.500 38.10	0.187 4.75	8.00	SST CG N
2.14	54.356	11604	3.50 88.900	2.006 50.952	0.81 0.142	3.000 76.200	2.500 11.120	0.470 11.94	0.067 1.70	6.00	SPR CG Z
2.14	54.356	S-174	4.38 111.252	1.920 48.768	6.30 1.103	2.900 73.660	18.000 80.064	0.610 15.49	0.110 2.79	5.50	SST CG N
2.14	54.356	S-447</									




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
2.187	55.550	S-1641	4.09 103.886	1.813 46.050	41.00 7.175	1.800 45.720	74.000 329.152	1.260 32.00	0.187 4.75	6.75	SST	CG N
2.187	55.550	S-113	5.00 127.000	1.977 50.216	2.80 0.490	4.100 104.140	11.000 48.928	0.950 24.13	0.105 2.67	8.00	SST	C N
2.187	55.550	S-440	5.00 127.000	1.927 48.946	5.40 0.945	3.700 93.980	20.000 88.960	1.250 31.75	0.130 3.30	9.67	SST	CG N
2.187	55.550	73018	5.00 127.000	1.773 45.034	54.00 9.450	2.400 60.960	131.000 582.688	1.710 43.43	0.207 5.26	8.25	OT	CG N
2.187	55.550	73025	5.00 127.000	1.751 44.475	63.00 11.025	2.400 60.960	153.000 680.544	1.910 48.51	0.218 5.54	8.75	OT	CG N
2.187	55.550	73032	5.00 127.000	1.687 42.850	103.00 18.025	2.100 53.340	220.000 978.560	2.380 60.45	0.250 6.35	9.50	OT	CG N
2.187	55.550	73039	5.00 127.000	1.625 41.275	167.00 29.225	1.800 45.720	300.000 1334.400	2.740 69.60	0.281 7.14	9.75	OT	CG N
2.187	55.550	S-73046	5.00 127.000	1.563 39.700	267.00 46.725	1.500 38.100	396.000 1761.408	3.040 77.22	0.312 7.92	9.75	OT	CG N
2.187	55.550	73053	5.00 127.000	1.501 38.125	423.00 74.025	1.200 30.480	508.000 2259.584	3.260 82.80	0.343 8.71	9.50	OT	CG N
2.187	55.550	73060	5.00 127.000	1.437 36.500	637.00 111.475	1.000 25.400	657.000 2922.336	3.560 90.42	0.375 9.53	9.50	OT	CG N
2.187	55.550	73067	5.00 127.000	1.401 35.585	825.00 144.375	0.890 22.606	733.000 3260.384	3.620 91.95	0.393 9.98	9.20	OT	CG N
2.187	55.550	S-3028	5.50 139.700	1.937 49.200	4.40 0.770	4.300 109.220	18.000 80.064	1.250 31.75	0.125 3.18	10.00	SST	CG N
2.187	55.550	73019	6.00 152.400	1.773 45.034	44.00 7.700	3.000 76.200	131.000 582.688	2.020 51.31	0.207 5.26	9.76	OT	CG N
2.187	55.550	73026	6.00 152.400	1.751 44.475	52.00 9.100	3.000 76.200	153.000 680.544	2.240 56.90	0.218 5.54	10.30	OT	CG N
2.187	55.550	73033	6.00 152.400	1.687 42.850	86.00 15.050	2.600 66.040	220.000 978.560	2.750 69.85	0.250 6.35	11.00	OT	CG N
2.187	55.550	73040	6.00 152.400	1.625 41.275	136.00 23.800	2.200 55.880	300.000 1334.400	3.230 82.04	0.281 7.14	11.50	OT	CG N
2.187	55.550	73047	6.00 152.400	1.563 39.700	218.00 38.150	1.800 45.720	396.000 1761.408	3.590 91.19	0.312 7.92	11.50	OT	CG N
2.187	55.550	73054	6.00 152.400	1.501 38.125	343.00 60.025	1.500 38.100	508.000 2259.584	3.860 98.04	0.343 8.71	11.30	OT	CG N
2.187	55.550	73061	6.00 152.400	1.437 36.500	514.00 89.950	1.300 33.020	657.000 2922.336	4.240 107.70	0.375 9.53	11.30	OT	CG N
2.187	55.550	73068	6.00 152.400	1.401 35.585	664.00 116.200	1.100 27.940	733.000 3260.384	4.300 109.22	0.393 9.98	11.00	OT	CG N
2.187	55.550	3074	6.38 162.052	2.043 51.892	0.68 0.119	5.700 144.780	3.900 17.347	0.650 16.51	0.072 1.83	8.00	SPR	C Z
2.187	55.550	73020	7.00 177.800	1.773 45.034	38.00 6.650	3.500 88.900	131.000 582.688	2.280 57.91	0.207 5.26	11.00	OT	CG N
2.187	55.550	73027	7.00 177.800	1.751 44.475	44.00 7.700	3.500 88.900	153.000 680.544	2.560 65.02	0.218 5.54	11.80	OT	CG N
2.187	55.550	73034	7.00 177.800	1.687 42.850	72.00 12.600	3.100 78.740	220.000 978.560	3.190 81.03	0.250 6.35	12.70	OT	CG N
2.187	55.550	73041	7.00 177.800	1.621 41.173	115.00 20.125	2.600 66.040	300.000 1334.400	3.850 97.79	0.283 7.19	13.60	OT	CG N
2.187	55.550	73048	7.00 177.800	1.563 39.700	183.00 32.025	2.200 55.880	396.000 1761.408	4.150 105.41	0.312 7.92	13.30	OT	CG N
2.187	55.550	73055	7.00 177.800	1.501 38.125	289.00 50.575	1.800 45.720	508.000 2259.584	4.460 113.28	0.343 8.71	13.00	OT	CG N
2.187	55.550	73062	7.00 177.800	1.437 36.500	432.00 75.600	1.500 38.100	657.000 2922.336	4.900 124.46	0.375 9.53	13.10	OT	CG N
2.187	55.550	73069	7.00 177.800	1.401 35.585	559.00 97.825	1.300 33.020	733.000 3260.384	4.960 125.98	0.393 9.98	12.60	OT	CG N
2.187	55.550	73021	8.00 203.200	1.773 45.034	32.00 5.600	4.100 104.140	131.000 582.688	2.590 65.79	0.207 5.26	12.50	OT	CG N
2.187	55.550	73028	8.00 203.200	1.751 44.475	38.00 6.650	4.000 101.600	153.000 680.544	2.890 73.41	0.218 5.54	13.30	OT	CG N
2.187	55.550	73035	8.00 203.200	1.687 42.850	62.00 10.850	3.600 91.440	220.000 978.560	3.630 92.20	0.250 6.35	14.50	OT	CG N
2.187	55.550	73042	8.00 203.200	1.625 41.275	100.00 17.500	3.000 76.200	300.000 1334.400	4.210 106.93	0.281 7.14	15.00	OT	CG N
2.187	55.550	73049	8.00 203.200	1.563 39.700	157.00 27.475	2.500 63.500	396.000 1761.408	4.720 119.89	0.312 7.92	15.10	OT	CG N
2.187	55.550	73056	8.00 203.200	1.501 38.125	249.00 43.575	2.000 50.800	508.000 2259.584	5.060 128.52	0.343 8.71	14.70	OT	CG N
2.187	55.550	73063	8.00 203.200	1.437 36.500	372.00 65.100	1.800 45.720	657.000 2922.336	5.570 141.48	0.375 9.53	14.90	OT	CG N
2.187	55.550	73070	8.00 203.200	1.401 35.585	480.00 84.000	1.500 38.100	733.000 3260.384	5.650 143.51	0.393 9.98	14.40	OT	CG N
2.187	55.550	73022	9.00 228.600	1.773 45.034	28.00 4.900	4.600 116.840	131.000 582.688	2.900 73.66	0.207 5.26	14.00	OT	CG N
2.187	55.550	73029	9.00 228.600	1.751 44.475	33.00 5.775	4.600 116.840	153.000 680.544	3.220 81.79	0.218 5.54	14.80	OT	CG N
2.187	55.550	73036	9.00 228.600	1.687 42.850	55.00 9.625	4.000 101.600	220.000 978.560	4.000 101.60	0.250 6.35	16.00	OT	CG N
2.187	55.550	73043	9.00 228.600	1.625 41.275	88.00 15.400	3.400 86.360	300.000 1334.400	4.700 119.38	0.281 7.14	16.70	OT	CG N
2.187	55.550	73050	9.00 228.600	1.563 39.700	139.00 24.325	2.800 71.120	396.000 1761.408	5.270 133.86	0.312 7.92	16.90	OT	CG N
2.187	55.550	73057	9.00 228.600	1.501 38.125	219.00 38.325	2.300 58.420	508.000 2259.584	5.660 143.76	0.343 8.71	16.50	OT	CG N
2.187	55.550	73064	9.00 228.600	1.437 36.500	327.00 57.225	2.000 50.800	657.000 2922.336	6.230 158.24	0.375 9.53	16.60	OT	CG N
2.187	55.550	73071	9.00 228.600	1.401 35.585	422.00 73.850	1.700 43.180	733.000 3260.384	6.320 160.53	0.393 9.98	16.10	OT	CG N
2.187	55.550	73023	10.00 254.000	1.773 45.034	26.00 4.550	5.100 129.540	131.000 582.688	3.160 80.26	0.207 5.26	15.30	OT	CG N
2.187	55.550	73030	10.00 254.000	1.751 44.475	30.00 5.250	5.100 129.540	153.000 680.544	3.550 90.17	0.218 5.54	16.30	OT	CG N
2.187	55.550	73037	10.00 254.000	1.687 42.850	50.00 8.750	4.400 111.760	220.000 978.560	4.380 111.25	0.250 6.35	17.50	OT	CG N
2.187	55.550	73044	10.00 254.000	1.625 41.275	78.00 13.650	3.800 96.520	300.000 1334.400	5.200 140.00	0.281 7.14	18.50	OT	CG N
2.187	55.550	73051	10.00 254.000	1.563 39.700	124.00 21.700	3.200 81.280	396.000 1761.408	5.810 147.57	0.312 7.92	18.60	OT	CG N
2.187	55.550	73058	10.00 254.000	1.501 38.125	195.00 34.125	2.600 66.040	508.000 2259.584	6.260 159.00	0.343 8.71	18.20	OT	CG N
2.187	55.550	73065	10.00 254.000	1.437 36.500	292.00 51.100	2.300 58.420	657.000 2922.336	6.890 175.01	0.375 9.53	18.40	OT	CG N
2.187	55.550	73072	10.00 254.000	1.401 35.585	376.00 65.800	2.000 50.800	733.000 3260.384	7.000 177.80	0.393 9.98	17.80	OT	CG N
2.203	55.956	4276	5.00 127.000	1.933 49.098	10.00 1.750	3.400 86.360	35.000 155.680	0.980 24.89	0.135 3.43	7.25	SPR	C G
2.219	56.363	3072	1.38 35.052	1.695 43.053	904.00 158.200	0.240 6.096	214.000 951.872	0.790 20.07	0.262 6.65	3.00	SPR	CG Z
2.219	56.363	12615	1.75 44.450	2.035 51.689	4.70 0.823	1.300 33.020	6.000 26.688	0.460 11.68	0.092 2.34	4.00	SST	C N
2.219	56.363	11297	3.75 95.250	1.907 48.438	24.00 4.200	2.200 55.880	52.000 231.296	0.940 23.88	0.156 3.96	6.00	SPR	CG Z
2.219	56.363	4227	5.75 146.050	1.949 49.505	10.00 1.750	3.500 88.900	35.000 155.680	0.980 24.89	0.135 3.43	7.25	SPR	CG Z
2.234	56.744	3205	5.00 127.000	1.820 46.228	47.00 8.225	2.400 60.960	114.000 507.072	1.810 45.97	0.207 5.26	8.75	SPR	CG Z
2.225	57.150	S-3219	2.09 53.086	1.954 49.632	15.00 2.625	1.200 30.480	18.000 80.064	0.930 23.62	0.148 3.76	6.25	SST	CG N




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fnsh								
2.312	58.725	4354	3.25	82.550	1.588	40.335	888.00	155.400	0.570	14.478	502.000	2232.896	2.080	52.83	0.362	9.19	5.75	SPR	CG	GI
2.312	58.725	2869	3.50	88.900	1.982	50.343	31.00	5.425	1.900	48.260	59.000	262.432	0.910	23.11	0.165	4.19	5.50	SPR	CG	GI
2.312	58.725	3287	4.25	107.950	1.892	48.057	60.00	10.500	1.900	48.260	115.000	511.520	1.470	37.34	0.210	5.33	7.00	SPR	CG	Z
2.312	58.725	12721	5.31	134.874	1.752	44.501	211.00	36.925	1.200	30.480	251.000	1116.448	1.960	49.78	0.280	7.11	7.00	HD	CG	N
2.312	58.725	3482	7.50	190.500	1.988	50.495	13.00	2.275	4.200	106.680	56.000	249.088	1.540	39.12	0.162	4.11	9.50	SPR	CG	Z
2.312	58.725	10151	8.50	215.900	2.072	52.629	4.00	0.700	6.000	152.400	24.000	106.752	1.080	27.43	0.120	3.05	9.00	SPR	CG	Z
2.312	58.725	10166	9.25	234.950	1.700	43.180	108.00	18.900	2.900	73.660	316.000	1405.568	5.050	128.27	0.306	7.77	16.50	SPR	CG	N
2.312	58.725	S-3188	13.00	330.200	1.588	40.335	138.00	24.150	2.900	73.660	401.000	1783.648	8.330	211.58	0.362	9.19	23.00	SST	CG	N
2.328	59.131	11417	6.38	162.052	2.058	52.273	3.90	0.683	4.600	116.840	18.000	80.064	1.790	45.47	0.135	3.43	12.30	SST	C	N
2.328	59.131	4009	18.50	469.900	2.094	53.188	2.30	0.403	9.900	251.460	22.000	97.856	1.640	41.66	0.117	2.97	13.00	SPR	C	Z
2.343	59.512	S-239	2.13	54.102	2.047	51.994	22.00	3.850	1.300	33.020	28.000	124.544	0.830	21.08	0.148	3.76	4.67	SST	C	N
2.343	59.512	10281	3.00	76.200	1.843	46.812	153.00	26.775	1.200	30.480	184.000	818.432	1.500	38.10	0.250	6.35	6.00	SPR	CG	Z
2.343	59.512	3120	3.75	95.250	2.073	52.654	13.00	2.275	2.600	66.040	33.000	146.784	0.740	18.80	0.135	3.43	5.50	SPR	CG	Z
2.343	59.512	3078	4.00	101.600	2.093	53.162	9.50	1.663	2.800	71.120	27.000	120.096	0.800	20.32	0.125	3.18	5.38	SPR	C	Z
2.343	59.512	3284	4.00	101.600	2.093	53.162	9.20	1.610	2.900	73.660	27.000	120.096	0.810	20.57	0.125	3.18	5.50	SPR	C	Z
2.343	59.512	3488	7.00	177.800	2.019	51.283	11.00	1.925	5.100	129.540	54.000	240.192	1.940	49.28	0.162	4.11	11.00	SPR	C	Z
2.343	59.512	10271	8.00	203.200	1.681	42.697	242.00	42.350	1.600	40.640	392.000	1743.616	3.560	90.42	0.331	8.41	10.80	SPR	CG	Z
2.343	59.512	S-376	8.25	209.550	1.779	45.187	72.00	12.600	2.903	73.736	209.000	929.632	4.101	104.17	0.282	7.16	14.50	SST	CG	N
2.359	59.919	10440	3.09	78.486	1.793	45.542	344.00	60.200	0.740	18.796	254.000	1129.792	1.420	36.07	0.283	7.19	5.00	SPR	CG	N
2.359	59.919	S-427	4.88	123.952	1.909	48.489	51.00	8.925	2.200	55.880	113.000	502.624	1.910	48.51	0.225	5.72	8.50	SST	CG	N
2.375	60.325	10367	3.00	76.200	1.875	47.625	146.00	25.550	1.200	30.480	181.000	805.088	1.500	38.10	0.250	6.35	6.00	SPR	CG	Z
2.375	60.325	S-1662	4.16	105.664	2.063	52.400	12.00	2.100	2.900	73.660	33.000	146.784	1.250	31.75	0.156	3.96	8.00	SST	CG	N
2.375	60.325	S-1654	4.44	112.776	2.063	52.400	15.00	2.625	3.000	76.200	43.000	191.264	1.050	26.67	0.156	3.96	6.75	SST	CG	N
2.375	60.325	4006	4.75	120.650	1.501	38.125	1200.00	210.000	0.670	17.018	802.000	3567.296	3.500	88.90	0.437	11.10	8.00	SPR	CG	BO
2.375	60.325	S-315	4.94	125.476	2.165	54.991	3.20	0.560	4.300	109.220	14.000	62.272	0.630	16.00	0.105	2.67	6.00	SST	CG	N
2.375	60.325	S-318	5.75	146.050	2.165	54.991	2.70	0.473	5.000	127.000	14.000	62.272	0.710	18.03	0.105	2.67	6.75	SST	CG	N
2.375	60.325	S-3094	6.63	168.402	2.063	52.400	14.00	2.450	3.200	81.280	43.000	191.264	1.040	26.42	0.156	3.96	6.75	SST	CG	N
2.375	60.325	4326	7.50	190.500	2.051	52.095	12.00	2.100	4.500	114.300	55.000	244.640	1.540	39.12	0.162	4.11	9.50	SPR	CG	Z
2.375	60.325	12043	9.56	242.824	2.079	52.807	6.90	1.208	6.200	157.480	43.000	191.264	1.630	41.40	0.148	3.76	11.00	SPR	CG	Z
2.375	60.325	S-137	11.80	299.720	2.063	52.400	5.40	0.945	8.000	203.200	43.000	191.264	2.260	57.40	0.156	3.96	14.50	SST	CG	N
2.375	60.325	4405	11.80	299.720	1.751	44.475	113.00	19.775	2.900	73.660	326.000	1450.048	4.910	124.71	0.312	7.92	15.80	SPR	CG	Z
2.39	60.706	4168	3.13	79.502	2.036	51.714	43.00	7.525	1.600	40.640	71.000	315.808	0.890	22.61	0.177	4.50	5.00	SPR	CG	Z
2.406	61.112	S-149	2.13	54.102	2.110	53.594	19.00	3.325	1.400	35.560	27.000	120.096	0.690	17.53	0.148	3.76	4.67	SST	CG	N
2.406	61.112	11573	3.06	77.724	2.242	56.947	3.50	0.613	2.300	58.420	8.100	36.029	0.370	9.40	0.082	2.08	3.50	SPR	C	N
2.406	61.112	4112	3.13	79.502	2.052	52.121	42.00	7.350	1.700	43.180	70.000	311.360	0.890	22.61	0.177	4.50	5.00	SST	CG	Z
2.406	61.112	S-986	3.16	80.264	1.992	50.597	65.00	11.375	1.400	35.560	92.000	409.216	1.100	27.94	0.207	5.26	5.33	SST	CG	N
2.406	61.112	10582	3.75	95.250	1.882	47.803	161.00	28.175	1.300	33.020	206.000	916.288	1.640	41.66	0.262	6.65	6.30	SPR	CG	N
2.406	61.112	10278	4.00	101.600	1.882	47.803	153.00	26.775	1.300	33.020	199.000	885.152	1.700	43.18	0.262	6.65	6.50	SPR	CG	N
2.406	61.112	S-161	4.13	104.902	2.094	53.188	11.00	1.925	2.900	73.660	31.000	137.888	1.250	31.75	0.156	3.96	8.00	SST	CG	N
2.406	61.112	S-964	4.88	123.952	2.196	55.778	3.10	0.543	4.100	104.140	13.000	57.824	0.740	18.80	0.105	2.67	6.00	SST	C	N
2.406	61.112	11506	5.13	130.302	1.972	50.089	51.00	8.925	2.400	60.960	122.000	542.656	1.950	49.53	0.217	5.51	8.00	SPR	CG	Z
2.406	61.112	S-396	7.00	177.800	2.166	55.016	3.70	0.648	5.800	147.320	21.000	93.408	0.950	24.13	0.120	3.05	8.00	SST	CG	N
2.406	61.112	S-3098	16.00	406.400	2.094	53.188	5.90	1.033	7.200	182.880	43.000	191.264	2.080	52.83	0.156	3.96	13.30	SST	CG	N
2.421	61.493	10276	3.00	76.200	1.855	47.117	252.00	44.100	0.990	25.146	248.000	1103.104	1.630	41.40	0.283	7.19	5.75	SPR	CG	N
2.437	61.900	4203	3.00	76.200	2.083	52.908	41.00	7.175	1.700	43.180	69.000	306.912	0.890	22.61	0.177	4.50	5.00	SPR	CG	Z
2.437	61.900	73073	4.00	101.600	1.875	47.625	170.00	29.750	1.600	40.640	271.000	1205.408	2.040	51.82	0.281	7.14	7.26	OT	CG	N
2.437	61.900	73079	4.00	101.600	1.813	46.050	270.00	47.250	1.300	33.020	358.000	1592.384	2.260	57.40	0.312	7.92	7.26	OT	CG	N
2.437	61.900	73085	4.00	101.600	1.751	44.475	412.00	72.100	1.100	27.940	461.000	2050.528	2.490	63.25	0.343	8.71	7.26	OT	CG	N
2.437	61.900	73091	4.00	101.600	1.713	43.510	526.00	92.050	1.000	25.400	539.000	2397.472	2.630	66.80	0.362	9.19	7.25	OT	CG	N
2.437	61.900	73097	4.00	101.600	1.687	42.850	617.00	107.975	0.970	24.638	597.000	2655.456	2.720	69.09	0.375	9.53	7.26	OT	CG	N
2.437	61.900	73103	4.00	101.600	1.651	41.935	765.00	133.875	0.870	22.098	668.000	2971.264	2.850	72.39	0.393	9.98	7.25	OT	CG	N
2.437	61.900	73109	4.00	101.600	1.625	4														




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
2.437	61.900	73077	8.00 203.200	1.875 47.625	79.00 13.825	3.400 86.360	271.000 1205.408	3.740 95.00	0.281 7.14	13.30	OT	CG N
2.437	61.900	73083	8.00 203.200	1.813 46.050	123.00 21.525	2.900 73.660	358.000 1592.384	4.220 107.19	0.312 7.92	13.50	OT	CG N
2.437	61.900	73089	8.00 203.200	1.751 44.475	186.00 32.550	2.500 63.500	461.000 2050.528	4.680 118.87	0.343 8.71	13.70	OT	CG N
2.437	61.900	73095	8.00 203.200	1.713 43.510	235.00 41.125	2.300 58.420	539.000 2397.472	4.980 126.49	0.362 9.19	13.80	OT	CG N
2.437	61.900	73101	8.00 203.200	1.687 42.850	276.00 48.300	2.200 55.880	597.000 2655.456	5.160 131.06	0.375 9.53	13.70	OT	CG N
2.437	61.900	73107	8.00 203.200	1.651 41.935	342.00 59.850	2.000 50.800	668.000 2971.264	5.400 137.16	0.393 9.98	13.70	OT	CG N
2.437	61.900	73113	8.00 203.200	1.625 41.275	414.00 72.450	1.800 45.720	733.000 3260.384	5.380 136.65	0.406 10.31	13.30	OT	CG N
2.437	61.900	73119	8.00 203.200	1.563 39.700	575.00 100.625	1.500 38.100	883.000 3927.584	5.850 148.59	0.437 11.10	13.40	OT	CG N
2.437	61.900	73078	10.00 254.000	1.875 47.625	63.00 11.025	4.300 109.220	271.000 1205.408	4.550 115.57	0.281 7.14	16.20	OT	CG N
2.437	61.900	73084	10.00 254.000	1.813 46.050	98.00 17.150	3.700 93.980	358.000 1592.384	5.140 130.56	0.312 7.92	16.50	OT	CG N
2.437	61.900	73090	10.00 254.000	1.751 44.475	147.00 25.725	3.100 78.740	461.000 2050.528	5.740 145.80	0.343 8.71	16.70	OT	CG N
2.437	61.900	73096	10.00 254.000	1.713 43.510	186.00 32.550	2.900 73.660	539.000 2397.472	6.100 154.94	0.362 9.19	16.90	OT	CG N
2.437	61.900	73102	10.00 254.000	1.687 42.850	216.00 37.800	2.800 71.120	597.000 2655.456	6.380 162.05	0.375 9.53	17.00	OT	CG N
2.437	61.900	73108	10.00 254.000	1.651 41.935	268.00 46.900	2.500 63.500	668.000 2971.264	6.670 169.42	0.393 9.98	17.00	OT	CG N
2.437	61.900	73114	10.00 254.000	1.625 41.275	322.00 56.350	2.300 58.420	733.000 3260.384	6.690 169.93	0.406 10.31	16.50	OT	CG N
2.437	61.900	73120	10.00 254.000	1.563 39.700	448.00 78.400	2.000 50.800	883.000 3927.584	7.270 184.66	0.437 11.10	16.60	OT	CG N
2.437	61.900	3483	10.80 274.320	1.987 50.470	28.00 4.900	4.600 116.840	130.000 578.240	3.150 80.01	0.225 5.72	14.00	SPR	CG Z
2.437	61.900	10163	11.00 279.400	1.813 46.050	105.00 18.375	3.000 76.200	319.000 1418.912	4.840 122.94	0.312 7.92	15.50	SPR	CG N
2.468	62.687	4185	3.75 95.250	2.132 54.153	24.00 4.200	2.500 63.500	59.000 262.432	1.010 25.65	0.168 4.27	6.00	SPR	CG Z
2.468	62.687	4129	6.75 171.450	2.054 52.172	23.00 4.025	4.300 109.220	97.000 431.456	2.480 62.99	0.207 5.26	12.00	SPR	CG Z
2.468	62.687	4379	7.50 190.500	1.806 45.872	262.00 45.850	1.400 35.560	374.000 1663.552	2.900 73.66	0.331 8.41	8.75	SPR	CG N
2.5	63.500	11956	2.22 56.388	2.174 55.220	32.00 5.600	1.500 38.100	47.000 209.056	0.730 18.54	0.163 4.14	4.50	SPR	CG Z
2.5	63.500	10941	4.00 101.600	1.376 34.950	5254.00 919.450	0.280 7.112	1483.000 6596.384	3.230 82.04	0.562 14.27	5.75	SPR	CG N
2.5	63.500	12591	5.00 127.000	2.202 55.931	11.00 1.925	3.800 96.520	42.000 186.816	1.190 30.23	0.148 3.76	7.00	SPR	C
2.5	63.500	4313	5.50 139.700	2.000 50.800	99.00 17.325	1.800 45.720	173.000 769.504	1.750 44.45	0.250 6.35	7.00	SPR	Z
2.5	63.500	10286	6.50 165.100	1.812 46.025	259.00 45.325	1.600 40.640	404.000 1796.992	3.350 85.09	0.344 8.74	9.75	SPR	CG Z
2.5	63.500	10238	7.75 196.850	1.888 47.955	140.00 24.500	2.100 53.340	294.000 1307.712	3.210 81.53	0.306 7.77	10.50	SPR	CG N
2.5	63.500	10310	9.63 244.602	1.776 45.110	235.00 41.125	2.000 50.800	469.000 2086.112	4.620 117.35	0.362 9.19	12.80	SPR	CG N
2.5	63.500	S-1639	10.50 266.700	2.030 51.562	20.00 3.500	6.070 154.178	121.000 538.208	4.237 107.62	0.234 5.94	18.10	SST	CG N
2.5	63.500	S-3082	17.00 431.800	2.188 55.575	2.60 0.455	13.000 330.200	34.000 151.232	3.930 99.82	0.156 3.96	25.00	SST	CG N
2.562	65.075	S-1651	1.94 49.276	2.178 55.321	43.00 7.525	0.980 24.892	42.000 186.816	0.960 24.38	0.192 4.88	5.00	SST	CG N
2.578	65.481	3391	3.50 88.900	1.888 47.955	457.00 79.975	0.870 22.098	396.000 1761.408	2.070 52.58	0.345 8.76	6.00	SPR	CG Z
2.593	65.862	S-410	8.75 222.250	2.383 60.528	2.00 0.350	7.100 180.340	14.000 62.272	0.740 18.80	0.105 2.67	7.00	SST	CG N
2.593	65.862	11896	9.63 244.602	2.123 53.924	30.00 5.250	4.600 116.840	139.000 618.272	3.060 77.72	0.235 5.97	13.00	SPR	CG N
2.625	66.675	11969	2.84 72.136	2.191 55.651	91.00 15.925	1.200 30.480	113.000 502.624	0.980 24.89	0.217 5.51	4.50	SPR	CG Z
2.625	66.675	S-980	3.00 76.200	2.445 62.103	1.90 0.333	2.500 63.500	4.800 21.350	0.510 12.95	0.090 2.29	4.67	SST	C
2.625	66.675	S-418	3.00 76.200	2.433 61.798	3.30 0.578	2.556 64.922	8.400 37.363	0.444 11.28	0.095 2.41	3.70	SST	C
2.625	66.675	S-993	3.88 98.552	2.097 53.264	95.00 16.625	1.636 41.554	155.000 689.440	1.755 44.58	0.262 6.65	6.70	SST	CG N
2.625	66.675	4410	4.00 101.600	1.749 44.425	1012.00 177.100	0.820 20.828	834.000 3709.632	3.070 77.98	0.438 11.13	7.00	OT	CG N
2.687	68.250	4135	2.50 63.500	2.437 61.900	12.00 2.100	2.000 50.800	23.000 102.304	0.510 12.95	0.125 3.18	4.00	SPR	CG Z
2.687	68.250	73121	4.00 101.600	2.063 52.400	226.00 39.550	1.400 35.560	327.000 1454.496	2.030 51.56	0.312 7.92	6.50	OT	CG N
2.687	68.250	73128	4.00 101.600	2.001 50.825	343.00 60.025	1.200 30.480	422.000 1877.056	2.230 56.64	0.343 8.71	6.50	OT	CG N
2.687	68.250	73135	4.00 101.600	1.963 49.860	437.00 76.475	1.100 27.940	494.000 2197.312	2.350 59.69	0.362 9.19	6.50	OT	CG N
2.687	68.250	73142	4.00 101.600	1.937 49.200	511.00 89.425	1.100 27.940	547.000 2433.056	2.440 61.98	0.375 9.53	6.50	OT	CG N
2.687	68.250	73149	4.00 101.600	1.901 48.285	631.00 110.425	0.970 24.638	612.000 2722.176	2.550 64.77	0.393 9.98	6.50	OT	CG N
2.687	68.250	73156	4.50 114.300	1.875 47.625	627.00 109.725	1.100 27.940	673.000 2993.504	2.940 74.68	0.406 10.31	7.25	OT	CG N
2.687	68.250	73163	4.50 114.300	1.813 46.050	877.00 153.475	0.930 23.622	812.000 3611.776	3.170 80.52	0.437 11.10	7.25	OT	CG N
2.687	68.250	73170	4.50 114.300	1.751 44.475	1262.00 220.850	0.780 19.812	988.000 4394.624	3.280 83.31	0.468 11.89	7.00	OT	CG N
2.687	68.250	3327	4.88 123.952	2.313 58.750	16.00 2.800	3.200 81.280	51.000 226.848	1.680 42.67	0.187 4.75	9.00	SPR	CG Z
2.687	68.250	73122	5.00 127.000	2.063 52.400	175.00 30.625	1.900 48.260	327.000 1454.496	2.430 61.72	0.312 7.92	7.80	OT	CG N
2.687	68.250	73129	5.00 127.000	2.001 50.825	262.00 45.850	1.600 40.640	422.000 1877.056	2.710 68.83	0.343 8.71	7.90	OT	CG N
2.687	68.250	73136	5.00 127.000	1.963 49.860	334.00 58.450	1.500 38.100	494.000 2197.312	2.850 72.39	0.362 9.19	7.88	OT	CG N
2.687	68.250	73143	5.00 127.000	1.937 49.200	392.00 68.600	1.400 35.560	547.000 2433.056	2.950 74.93	0.375 9.53	7.88	OT	CG N
2.687	68.250	73150	5.00 127.000	1.901 48.285	481.00 84.175	1.300 33.020	612.000 2722.176	3.110 78.99	0.393 9.98	7.90	OT	CG N
2.687	68.250	73157	5.00 127.000	1.875 47.625	549.00 96.075	1.200 30.480	673.000 2993.504	3.250 82.55	0.406 10.31	8.00	OT	CG N
2.687	68.250	73164	5.00 127.000	1.813 46.050	767.00 134.225	1.100 27.940	812.000 3611.776	3.500 88.90	0.437 11.10	8.00	OT	CG N
2.687	68.250	73171	5.00 127.000	1.751 44.475	1107.00 193.725	0.890 22.606	988.000 4394.624	3.600 91.44	0.468 11.89	7.70	OT	CG N
2.687	68.250	73123	6.00 152.400	2.063 52.400	143.00 25.025	2.300 58.420	327.000 1454.496	2.850 72.39	0.312 7.92	9.13	OT	CG N
2.687	68.250	73130	6.00 152.400	2.001 50.825	213.00 37.275	2.000 50.800	422.000 1877.056	3.170 80.52	0.343 8.71	9.25	OT	CG N
2.687	68.250	73137	6.00 152.400	1.963 49.860	271.00 47.425	1.800 45.720	494.000 2197.312	3.350 85.09	0.362 9.19	9.25	OT	CG N
2												




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h
2.687	68.250	73167	8.00 203.200	1.813 46.050	445.00 77.875	1.800 45.720	812.000 3611.776	5.400 137.16	0.437 11.10	12.30	OT	CG N
2.687	68.250	73174	8.00 203.200	1.751 44.475	638.00 111.650	1.500 38.100	988.000 4394.624	5.570 141.48	0.468 11.89	11.90	OT	CG N
2.687	68.250	73126	9.00 228.600	2.063 52.400	91.00 15.925	3.600 91.440	327.000 1454.496	4.120 104.65	0.312 7.92	13.20	OT	CG N
2.687	68.250	73133	9.00 228.600	2.001 50.825	137.00 23.975	3.100 78.740	422.000 1877.056	4.550 115.57	0.343 8.71	13.30	OT	CG N
2.687	68.250	73140	9.00 228.600	1.963 49.860	173.00 30.275	2.900 73.660	494.000 2197.312	4.840 122.94	0.362 9.19	13.40	OT	CG N
2.687	68.250	73147	9.00 228.600	1.937 49.200	202.00 35.350	2.700 68.580	547.000 2433.056	5.020 127.51	0.375 9.53	13.40	OT	CG N
2.687	68.250	73154	9.00 228.600	1.901 48.285	247.00 43.225	2.500 63.500	612.000 2722.176	5.310 134.87	0.393 9.98	13.50	OT	CG N
2.687	68.250	73161	9.00 228.600	1.875 47.625	283.00 49.525	2.400 60.960	673.000 2993.504	5.530 140.46	0.406 10.31	13.60	OT	CG N
2.687	68.250	73168	9.00 228.600	1.813 46.050	390.00 68.250	2.100 53.340	812.000 3611.776	6.030 153.16	0.437 11.10	13.80	OT	CG N
2.687	68.250	73175	9.00 228.600	1.751 44.475	559.00 97.825	1.800 45.720	988.000 4394.624	6.220 157.99	0.468 11.89	13.30	OT	CG N
2.687	68.250	S-3118	9.50 241.300	2.363 60.020	8.20 1.435	5.200 132.080	43.000 191.264	1.540 39.12	0.162 4.11	8.50	SST	C N
2.687	68.250	73127	10.00 254.000	2.063 52.400	81.00 14.175	4.000 101.600	327.000 1454.496	4.530 115.06	0.312 7.92	14.50	OT	CG N
2.687	68.250	73134	10.00 254.000	2.001 50.825	122.00 21.350	3.500 88.900	422.000 1877.056	5.040 128.02	0.343 8.71	14.70	OT	CG N
2.687	68.250	73141	10.00 254.000	1.963 49.860	154.00 26.950	3.200 81.280	494.000 2197.312	5.340 135.64	0.362 9.19	14.80	OT	CG N
2.687	68.250	73148	10.00 254.000	1.937 49.200	180.00 31.500	3.000 76.200	547.000 2433.056	5.530 140.46	0.375 9.53	14.80	OT	CG N
2.687	68.250	73155	10.00 254.000	1.901 48.285	220.00 38.500	2.800 71.120	612.000 2722.176	5.860 148.84	0.393 9.98	14.90	OT	CG N
2.687	68.250	73162	10.00 254.000	1.875 47.625	251.00 43.925	2.700 68.580	673.000 2993.504	6.130 155.70	0.406 10.31	15.10	OT	CG N
2.687	68.250	73169	10.00 254.000	1.813 46.050	347.00 60.725	2.300 58.420	812.000 3611.776	6.670 169.42	0.437 11.10	15.30	OT	CG N
2.687	68.250	73176	10.00 254.000	1.751 44.475	497.00 86.975	2.000 50.800	988.000 4394.624	6.880 174.75	0.468 11.89	14.70	OT	CG N
2.703	68.656	4157	6.25 158.750	2.433 61.798	6.60 1.155	4.300 109.220	29.000 128.992	0.980 24.89	0.135 3.43	6.25	SPR	C GI
2.703	68.656	12019	7.00 177.800	2.493 63.322	2.20 0.385	6.300 160.020	14.000 62.272	0.680 17.27	0.105 2.67	6.50	SPR	CG Z
2.734	69.444	1920	3.75 95.250	2.524 64.110	1.30 0.228	2.700 68.580	3.500 15.568	1.090 27.69	0.105 2.67	9.33	SPR	C Z
2.734	69.444	3058	5.00 127.000	2.422 61.519	12.00 2.100	3.400 86.360	43.000 191.264	0.940 23.88	0.156 3.96	6.00	SPR	CG Z
2.734	69.444	3238	6.25 158.750	2.454 62.332	7.30 1.278	4.300 109.220	32.000 142.336	0.890 22.61	0.140 3.56	6.33	SPR	CG Z
2.75	69.850	S-3157	2.50 63.500	2.366 60.096	81.00 14.175	0.800 20.320	65.000 289.120	0.620 15.75	0.192 4.88	3.25	SST	C N
2.75	69.850	4336	4.75 120.650	2.300 58.420	65.00 11.375	1.800 45.720	116.000 515.968	1.240 31.50	0.225 5.72	5.50	SPR	CG Z
2.75	69.850	4086	6.25 158.750	2.000 50.800	303.00 53.025	1.600 40.640	476.000 2117.248	3.380 85.85	0.375 9.53	9.00	HD	CG N
2.75	69.850	4093	8.50 215.900	1.250 31.750	7107.00 1243.725	0.360 9.144	2563.000 11400.224	7.500 190.50	0.750 19.05	10.00	HD	CG N
2.75	69.850	S-3116	14.00 355.600	2.438 61.925	6.10 1.068	6.200 157.480	38.000 169.024	1.400 35.56	0.156 3.96	9.00	SST	CG N
2.796	71.018	11890	9.00 228.600	2.564 65.126	1.50 0.263	7.800 198.120	12.000 53.376	1.250 31.75	0.116 2.95	9.75	SST	C N
2.812	71.425	4328	1.63 41.402	1.938 49.225	3913.00 684.775	0.180 4.572	693.000 3082.464	1.310 33.27	0.437 11.10	3.00	SPR	CG Z
2.812	71.425	4334	13.00 330.200	2.246 57.048	33.00 5.775	6.600 167.640	215.000 956.320	5.520 140.21	0.283 7.19	19.50	SPR	CG Z
2.875	73.025	S-3095	2.88 73.152	2.351 59.715	189.00 33.075	0.740 18.796	139.000 618.272	0.980 24.89	0.262 6.65	3.75	SST	CG N
2.875	73.025	S-3159	3.00 76.200	2.625 66.675	15.00 2.625	1.400 35.560	20.000 88.960	0.500 12.70	0.125 3.18	3.00	SST	C N
2.875	73.025	S-86	3.00 76.200	2.491 63.271	39.00 6.825	1.600 40.640	62.000 275.776	0.820 20.83	0.192 4.88	4.25	SST	CG N
2.875	73.025	S-995	3.63 92.202	2.309 58.649	107.00 18.725	1.612 40.945	173.000 769.504	1.759 44.68	0.282 7.16	6.25	SST	CG N
2.875	73.025	4240	6.75 171.450	2.087 53.010	378.00 66.150	1.400 35.560	516.000 2295.168	3.150 80.01	0.394 10.01	8.00	SPR	CG Z
2.875	73.025	4314	7.50 190.500	2.375 60.325	52.00 9.100	2.900 73.660	151.000 671.648	2.000 50.80	0.250 6.35	8.00	SPR	CG Z
2.875	73.025	S-3124	8.50 215.900	2.375 60.325	39.00 6.825	3.300 83.820	127.000 564.896	2.250 57.15	0.250 6.35	9.00	SST	CG N
2.875	73.025	11314	12.80 325.120	2.213 56.210	71.00 12.425	4.600 116.840	325.000 1445.600	5.540 140.72	0.331 8.41	16.80	SPR	CG N
2.906	73.812	3313	1.50 38.100	2.492 63.297	135.00 23.625	0.660 16.764	89.000 395.872	0.620 15.75	0.207 5.26	3.00	SPR	CG Z
2.906	73.812	73177	4.00 101.600	2.344 59.538	116.00 20.300	2.000 50.800	230.000 1023.040	1.760 44.70	0.281 7.14	6.27	OT	CG N
2.906	73.812	73183	4.00 101.600	2.282 57.963	184.00 32.200	1.700 43.180	304.000 1352.192	1.950 49.53	0.312 7.92	6.24	OT	CG N
2.906	73.812	73189	4.00 101.600	2.220 56.388	278.00 48.650	1.400 35.560	392.000 1743.616	2.140 54.36	0.343 8.71	6.25	OT	CG N
2.906	73.812	73195	4.00 101.600	2.182 55.423	352.00 61.600	1.300 33.020	459.000 2041.632	2.270 57.66	0.362 9.19	6.26	OT	CG N
2.906	73.812	73201	4.00 101.600	2.156 54.762	412.00 72.100	1.200 30.480	509.000 2264.032	2.350 59.69	0.375 9.53	6.26	OT	CG N
2.906	73.812	73207	4.00 101.600	2.120 53.848	508.00 88.900	1.100 27.940	570.000 2535.360	2.460 62.48	0.393 9.98	6.25	OT	CG N
2.906	73.812	73178	5.00 127.000	2.344 59.538	90.00 15.750	2.600 66.040	230.000 1023.040	2.110 53.59	0.281 7.14	7.51	OT	CG N
2.906	73.812	73184	5.00 127.000	2.282 57.963	142.00 24.850	2.100 53.340	304.000 1352.192	2.340 59.44	0.312 7.92	7.50	OT	CG N
2.906	73.812	73190	5.00 127.000	2.220 56.388	211.00 36.925	1.900 48.260	392.000 1743.616	2.610 66.29	0.343 8.71	7.60	OT	CG N
2.906	73.812	73196	5.00 127.000	2.182 55.423	273.00 47.775	1.700 43.180	459.000 2041.632	2.710 68.83	0.362 9.19	7.49	OT	CG N
2.906	73.812	73202	5.00 127.000	2.156 54.762	312.00 54.600	1.600 40.640	509.000 2264.032	2.860 72.64	0.375 9.53	7.62	OT	CG N
2.906	73.812	73208	5.00 127.000	2.120 53.848	384.00 67.200	1.500 38.100	570.000 2535.360	3.000 76.20	0.393 9.98	7.63	OT	CG N
2.906	73.812	73213	5.00 127.000	2.094 53.188	435.00 76.125	1.400 35.560	627.000 2788.896	3.140 79.76	0.406 10.31	7.75	OT	CG N
2.906	73.812	73219	5.00 127.000	2.032 51.613	633.00 110.775	1.200 30.480	757.000 3367.136	3.280 83.31	0.437 11.10	7.50	OT	CG N
2.906	73.812	73225	5.00 127.000	1.970 50.038	865.00 151.375	1.100 27.940	923.000 4105.504	3.510 89.15	0.468 11.89	7.50	OT	CG N
2.906	73.812	73231	5.00 127.000	1.906 48.412	1228.00 214.900	0.870 22.098	1074.000 4777.152	3.630 92.20	0.500 12.70	7.25	OT	CG N
2.906	73.812	73237	5.00 127.000	1.844 46.838	1625.00 284.375	0.790 20.066	1276.000 5675.648	3.850 97.79	0.531 13.49	7.25	OT	CG N
2.906	73.812	73179	6.00 152.400	2.344 59.538	73.00 12.775	3.200 81.280	230.000 1023.040	2.470 62.74	0.281 7.14	8.79	OT	CG N
2.906	73.812	73185	6.00 152.400	2.282 57.963	116.00 20.300	2.600 66.040	304.000 1352.192	2.720 69.09	0.312 7.9			




Century Spring

Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
2.906	73.812	73239	7.00 177.800	1.844 46.838	1073.00 187.775	1.200 30.480	1276.000 5675.648	5.280 134.11	0.531 13.49	9.95	OT	CG N
2.906	73.812	73181	8.00 203.200	2.344 59.538	53.00 9.275	4.300 109.220	230.000 1023.040	3.190 81.03	0.281 7.14	11.30	OT	CG N
2.906	73.812	73187	8.00 203.200	2.282 57.963	84.00 14.700	3.600 91.440	304.000 1352.192	3.520 89.41	0.312 7.92	11.30	OT	CG N
2.906	73.812	73193	8.00 203.200	2.220 56.388	126.00 22.050	3.100 78.740	392.000 1743.616	3.900 99.06	0.343 8.71	11.40	OT	CG N
2.906	73.812	73199	8.00 203.200	2.182 55.423	158.00 27.650	2.900 73.660	459.000 2041.632	4.160 105.66	0.362 9.19	11.50	OT	CG N
2.906	73.812	73205	8.00 203.200	2.156 54.762	185.00 32.375	2.800 71.120	509.000 2264.032	4.300 109.22	0.375 9.53	11.50	OT	CG N
2.906	73.812	73211	8.00 203.200	2.120 53.848	227.00 39.725	2.500 63.500	570.000 2535.360	4.530 115.06	0.393 9.98	11.50	OT	CG N
2.906	73.812	73216	8.00 203.200	2.094 53.188	253.00 44.275	2.500 63.500	627.000 2788.896	4.820 122.43	0.406 10.31	11.90	OT	CG N
2.906	73.812	73222	8.00 203.200	2.032 51.613	367.00 64.225	2.100 53.340	757.000 3367.136	5.020 127.51	0.437 11.10	11.50	OT	CG N
2.906	73.812	73228	8.00 203.200	1.970 50.038	494.00 86.450	1.900 48.260	923.000 4105.504	5.440 138.18	0.468 11.89	11.60	OT	CG N
2.906	73.812	73234	8.00 203.200	1.906 48.412	697.00 121.975	1.500 38.100	1074.000 4777.152	5.630 143.00	0.500 12.70	11.30	OT	CG N
2.906	73.812	73240	8.00 203.200	1.844 46.838	922.00 161.350	1.400 35.560	1276.000 5675.648	5.980 151.89	0.531 13.49	11.30	OT	CG N
2.906	73.812	73182	10.00 254.000	2.344 59.538	42.00 7.350	5.500 139.700	230.000 1023.040	3.880 98.55	0.281 7.14	13.80	OT	CG N
2.906	73.812	73188	10.00 254.000	2.282 57.963	66.00 11.550	4.600 116.840	304.000 1352.192	4.310 109.47	0.312 7.92	13.80	OT	CG N
2.906	73.812	73194	10.00 254.000	2.220 56.388	98.00 17.150	4.000 101.600	392.000 1743.616	4.820 122.43	0.343 8.71	14.10	OT	CG N
2.906	73.812	73200	10.00 254.000	2.182 55.423	125.00 21.875	3.700 93.980	459.000 2041.632	5.070 128.79	0.362 9.19	14.00	OT	CG N
2.906	73.812	73206	10.00 254.000	2.156 54.762	143.00 25.025	3.600 91.440	509.000 2264.032	3.530 135.89	0.375 9.53	14.30	OT	CG N
2.906	73.812	73212	10.00 254.000	2.120 53.848	176.00 30.800	3.200 81.280	570.000 2535.360	5.610 142.49	0.393 9.98	14.30	OT	CG N
2.906	73.812	73217	10.00 254.000	2.094 53.188	198.00 34.650	3.200 81.280	627.000 2788.896	5.940 150.88	0.406 10.31	14.60	OT	CG N
2.906	73.812	73223	10.00 254.000	2.032 51.613	284.00 49.700	2.700 68.580	757.000 3367.136	6.230 158.24	0.437 11.10	14.30	OT	CG N
2.906	73.812	73229	10.00 254.000	1.970 50.038	388.00 67.900	2.400 60.960	923.000 4105.504	6.680 169.67	0.468 11.89	14.30	OT	CG N
2.906	73.812	73235	10.00 254.000	1.906 48.412	543.00 95.025	2.000 50.800	1074.000 4777.152	6.940 176.28	0.500 12.70	13.90	OT	CG N
2.906	73.812	73241	10.00 254.000	1.844 46.838	711.00 124.425	1.800 45.720	1276.000 5675.648	7.430 188.72	0.531 13.49	14.00	OT	CG N
2.906	73.812	73218	12.00 304.800	2.094 53.188	163.00 28.525	3.800 96.520	627.000 2788.896	7.040 178.82	0.406 10.31	17.30	OT	CG N
2.906	73.812	73224	12.00 304.800	2.032 51.613	232.00 40.600	3.300 83.820	757.000 3367.136	7.440 188.98	0.437 11.10	17.00	OT	CG N
2.906	73.812	73230	12.00 304.800	1.970 50.038	317.00 55.475	2.900 73.660	923.000 4105.504	7.960 202.18	0.468 11.89	17.00	OT	CG N
2.906	73.812	73236	12.00 304.800	1.906 48.412	445.00 77.875	2.400 60.960	1074.000 4777.152	8.250 209.55	0.500 12.70	16.50	OT	CG N
2.906	73.812	73242	12.00 304.800	1.844 46.838	583.00 102.025	2.200 55.880	1276.000 5675.648	8.830 224.28	0.531 13.49	16.60	OT	CG N
2.938	74.625	10799	3.25 82.550	2.728 69.291	2.70 0.473	2.800 71.120	7.600 33.805	0.470 11.94	0.105 2.67	4.50	SST	CG N
2.938	74.625	12628	3.38 85.852	2.524 64.110	52.00 9.100	1.700 43.180	88.000 391.424	0.930 23.62	0.207 5.26	4.50	SPR	CG Z
2.938	74.625	11779	5.81 147.574	2.564 65.126	11.00 1.925	3.900 99.060	42.000 186.816	1.870 47.50	0.187 4.75	10.00	SPR	CG Z
2.938	74.625	4055	8.00 203.200	1.564 39.726	3509.00 614.075	0.590 14.986	2088.000 9287.424	6.870 174.50	0.687 17.45	10.00	HD	CG N
2.938	74.625	S-3153	10.50 266.700	2.564 65.126	9.20 1.610	6.100 154.940	56.000 249.088	1.870 47.50	0.187 4.75	10.00	SST	CG N
2.984	75.794	12443	7.00 177.800	2.782 70.663	1.00 0.175	6.179 156.947	6.200 27.578	0.821 20.85	0.100 2.54	7.20	SST	C N
3	76.200	4138	1.75 44.450	2.586 65.684	81.00 14.175	1.000 25.400	83.000 369.184	0.720 18.29	0.207 5.26	3.50	SPR	CG Z
3	76.200	11357	2.00 50.800	2.376 60.350	561.00 98.175	0.470 11.938	262.000 1165.376	1.010 25.65	0.312 7.92	3.25	SPR	CG Z
3	76.200	S-3221	2.72 69.088	2.618 66.497	31.00 5.425	1.861 47.269	58.000 257.984	0.859 21.82	0.192 4.88	4.50	SST	CG N
3	76.200	S-3030	9.00 228.600	2.616 66.446	13.00 2.275	4.600 116.840	59.000 262.432	1.540 39.12	0.192 4.88	8.00	SST	CG N
3	76.200	4241	11.00 279.400	2.616 66.446	9.80 1.715	7.000 177.800	69.000 306.912	2.110 53.59	0.192 4.88	11.00	SPR	CG Z
3.031	76.987	S-3218	2.25 57.150	2.595 65.913	43.00 7.525	1.200 30.480	50.000 222.400	1.090 27.69	0.218 5.54	5.00	SST	CG N
3.031	76.987	4249	4.63 117.602	2.345 59.563	341.00 59.675	0.980 24.892	335.000 1490.080	1.720 43.69	0.343 8.71	5.00	SPR	CG Z
3.125	79.375	11570	2.09 53.086	2.929 74.397	2.40 0.420	1.600 40.640	3.800 16.902	0.490 12.45	0.098 2.49	4.00	SPR	CG N
3.125	79.375	10819	4.69 119.126	2.313 58.750	486.00 85.050	1.100 27.940	521.000 2317.408	2.440 61.98	0.406 10.31	6.00	SPR	CG N
3.14	79.756	11606	1.50 38.100	2.764 70.206	23.00 4.025	0.370 9.398	8.700 38.698	1.130 28.70	0.188 4.78	5.00	SPR	CG Z
3.156	80.162	S-992	1.88 47.752	2.832 71.933	32.00 5.600	1.200 30.480	37.000 164.576	0.490 12.45	0.162 4.11	3.00	SST	CG N
3.156	80.162	S-249	3.19 81.026	2.860 72.644	11.00 1.925	2.600 66.040	29.000 128.992	0.590 14.99	0.148 3.76	4.00	SST	CG N
3.156	80.162	73243	5.00 127.000	2.470 62.738	179.00 31.325	2.000 50.800	363.000 1614.624	2.400 60.96	0.343 8.71	7.00	OT	CG N
3.156	80.162	73249	5.00 127.000	2.432 61.773	226.00 39.550	1.900 48.260	426.000 1894.848	2.530 64.26	0.362 9.19	7.00	OT	CG N
3.156	80.162	73255	5.00 127.000	2.406 61.112	264.00 46.200	1.800 45.720	472.000 2099.456	2.630 66.80	0.375 9.53	7.00	OT	CG N
3.156	80.162	73261	5.00 127.000	2.370 60.198	325.00 56.875	1.600 40.640	529.000 2352.992	2.750 69.85	0.393 9.98	7.00	OT	CG N
3.156	80.162	73267	5.00 127.000	2.344 59.538	376.00 65.800	1.500 38.100	581.000 2584.288	2.840 72.14	0.406 10.31	7.00	OT	CG N
3.156	80.162	73273	5.00 127.000	2.282 57.963	522.00 91.350	1.300 33.020	703.000 3126.944	3.060 77.72	0.437 11.10	7.00	OT	CG N
3.156	80.162	73279	5.00 127.000	2.220 56.388	710.00 124.250	1.200 30.480	858.000 3816.384	3.280 83.31	0.468 11.89	7.00	OT	CG N
3.156	80.162	73285	5.00 127.000	2.156 54.762	959.00 167.825	1.000 25.400	999.000 4443.552	3.500 88.90	0.500 12.70	7.00	OT	CG N
3.156	80.162	73291	5.00 127.000	2.094 53.188	1264.00 221.200	0.940 23.876	1188.000 5284.224	3.720 94.49	0.531 13.49	7.00	OT	CG N
3.156	80.162	4023-A	5.50 139.700	1.968 49.987	2003.00 350.525	0.870 22.098	1750.000 7784.000	4.340 110.24	0.594 15.09	7.31	SPR	CG N
3.156	80.162	73244	6.00 152.400	2.470 62.738	146.00 25.550	2.500 63.500	363.000 1614.624	2.790 70.87	0.343 8.71	8.12	OT	CG N
3.156	80.162	73250	6.00 152.400	2.432 61.773	185.00 32.375	2.300 58.420	426.000 1894.848	2.940 74.68	0.362 9.19	8.12	OT	CG N
3.156	80.162	73256	6.00 152.400	2.406 61.112	212.00 37.100	2.200 55.880	472.000 2099.456	3.090 78.49	0.375 9.53	8.25	OT	CG N
3.156	80.162	73262	6.00 152.400	2.370 60.198	260.00 45.500	2.000 50.800	529.000 23					




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h
3.156	80.162	73282	8.00 203.200	2.220 56.388	408.00 71.400	2.100 53.340	858.000 3816.384	5.010 127.25	0.468 11.89	10.70	OT	CG N
3.156	80.162	73288	8.00 203.200	2.156 54.762	548.00 95.900	1.800 45.720	999.000 4443.552	5.380 136.65	0.500 12.70	10.80	OT	CG N
3.156	80.162	73294	8.00 203.200	2.094 53.188	718.00 125.650	1.700 43.180	1188.000 5284.224	5.730 145.54	0.531 13.49	10.80	OT	CG N
3.156	80.162	73247	10.00 254.000	2.470 62.738	83.00 14.525	4.400 111.760	363.000 1614.624	4.380 111.25	0.343 8.71	12.80	OT	CG N
3.156	80.162	73253	10.00 254.000	2.432 61.773	105.00 18.375	4.000 101.600	426.000 1894.848	4.610 117.09	0.362 9.19	12.70	OT	CG N
3.156	80.162	73259	10.00 254.000	2.406 61.112	122.00 21.350	3.900 99.060	472.000 2099.456	4.830 122.68	0.375 9.53	12.90	OT	CG N
3.156	80.162	73265	10.00 254.000	2.370 60.198	150.00 26.250	3.500 88.900	529.000 2352.992	5.060 128.52	0.393 9.98	12.90	OT	CG N
3.156	80.162	73271	10.00 254.000	2.344 59.538	171.00 29.925	3.400 86.360	581.000 2584.288	5.280 134.11	0.406 10.31	13.00	OT	CG N
3.156	80.162	73277	10.00 254.000	2.282 57.963	237.00 41.475	3.000 76.200	703.000 3126.944	5.680 144.27	0.437 11.10	13.00	OT	CG N
3.156	80.162	73283	10.00 254.000	2.220 56.388	317.00 55.475	2.700 68.580	858.000 3816.384	6.180 156.97	0.468 11.89	13.20	OT	CG N
3.156	80.162	73289	10.00 254.000	2.156 54.762	426.00 74.550	2.300 58.420	999.000 4443.552	6.630 168.40	0.500 12.70	13.30	OT	CG N
3.156	80.162	73295	10.00 254.000	2.094 53.188	559.00 97.825	2.100 53.340	1188.000 5284.224	7.060 179.32	0.531 13.49	13.30	OT	CG N
3.156	80.162	73248	12.00 304.800	2.470 62.738	69.00 12.075	5.300 134.620	363.000 1614.624	5.150 130.81	0.343 8.71	15.00	OT	CG N
3.156	80.162	73254	12.00 304.800	2.432 61.773	85.00 14.875	5.000 127.000	426.000 1894.848	5.520 140.21	0.362 9.19	15.30	OT	CG N
3.156	80.162	73260	12.00 304.800	2.406 61.112	100.00 17.500	4.700 119.380	472.000 2099.456	5.720 145.29	0.375 9.53	15.30	OT	CG N
3.156	80.162	73266	12.00 304.800	2.370 60.198	123.00 21.525	4.300 109.220	529.000 2352.992	5.990 152.15	0.393 9.98	15.20	OT	CG N
3.156	80.162	73272	12.00 304.800	2.344 59.538	140.00 24.500	4.100 104.140	581.000 2584.288	6.250 158.75	0.406 10.31	15.40	OT	CG N
3.156	80.162	73278	12.00 304.800	2.282 57.963	193.00 33.775	3.600 91.440	703.000 3126.944	6.770 171.96	0.437 11.10	15.50	OT	CG N
3.156	80.162	73284	12.00 304.800	2.220 56.388	260.00 45.500	3.300 83.820	858.000 3816.384	7.320 185.93	0.468 11.89	15.70	OT	CG N
3.156	80.162	73290	12.00 304.800	2.156 54.762	349.00 61.075	2.900 73.660	999.000 4443.552	7.880 200.15	0.500 12.70	15.80	OT	CG N
3.156	80.162	73296	12.00 304.800	2.094 53.188	456.00 79.800	2.600 66.040	1188.000 5284.224	8.420 213.87	0.531 13.49	15.90	OT	CG N
3.172	80.569	S-3108	6.00 152.400	2.932 74.473	1.50 0.263	4.900 124.460	7.500 33.360	1.080 27.43	0.120 3.05	8.00	SST	C N
3.25	82.550	10708	2.13 54.102	2.780 70.612	107.00 18.725	1.000 25.400	112.000 498.176	0.820 20.83	0.235 5.97	3.50	SPR	CG Z
3.25	82.550	S-3102	4.25 107.950	2.750 69.850	60.00 10.500	1.900 48.260	113.000 502.624	1.250 31.75	0.250 6.35	5.00	SST	CG N
3.25	82.550	4002	4.50 114.300	2.250 57.150	1234.00 215.950	0.700 17.780	866.000 3851.968	2.750 69.85	0.500 12.70	5.50	SPR	CG N
3.25	82.550	4096	12.00 304.800	2.250 57.150	411.00 71.925	2.100 53.340	866.000 3851.968	6.250 158.75	0.500 12.70	12.50	SPR	CG N
3.266	82.956	S-1635	6.75 171.450	2.330 59.182	632.00 110.600	0.890 22.606	562.000 2499.776	2.960 75.18	0.468 11.89	6.33	SST	CG N
3.328	84.531	10985	3.13 79.502	2.828 71.831	59.00 10.325	1.900 48.260	111.000 493.728	1.220 30.99	0.250 6.35	5.00	SST	CG N
3.375	85.725	4347	5.25 133.350	2.991 75.971	22.00 3.850	2.800 71.120	61.000 271.328	0.910 23.11	0.192 4.88	4.75	SPR	CG Z
3.375	85.725	S-3020	5.50 139.700	3.125 79.375	3.00 0.525	4.800 121.920	14.000 62.272	0.750 19.05	0.125 3.18	5.00	SST	C N
3.375	85.725	4090	14.00 355.600	2.501 63.525	207.00 36.225	2.800 71.120	588.000 2615.424	5.240 133.10	0.437 11.10	12.00	SPR	CG N
3.406	86.512	73297	6.00 152.400	2.720 69.088	121.00 21.175	2.800 71.120	338.000 1503.424	2.650 67.31	0.343 8.71	7.72	OT	CG N
3.406	86.512	73303	6.00 152.400	2.682 68.123	152.00 26.600	2.600 66.040	396.000 1761.408	2.810 71.37	0.362 9.19	7.76	OT	CG N
3.406	86.512	73309	6.00 152.400	2.656 67.462	177.00 30.975	2.500 63.500	440.000 1957.120	2.910 73.91	0.375 9.53	7.77	OT	CG N
3.406	86.512	73315	6.00 152.400	2.620 66.548	209.00 36.575	2.400 60.960	492.000 2188.416	3.140 79.76	0.393 9.98	8.00	OT	CG N
3.406	86.512	73321	6.00 152.400	2.594 65.888	241.00 42.175	2.200 55.880	542.000 2410.816	3.250 82.55	0.406 10.31	8.00	OT	CG N
3.406	86.512	73327	6.00 152.400	2.532 64.313	341.00 59.675	1.900 48.260	656.000 2917.888	3.440 87.38	0.437 11.10	7.87	OT	CG N
3.406	86.512	73333	6.00 152.400	2.470 62.738	473.00 82.775	1.700 43.180	800.000 3558.400	3.630 92.20	0.468 11.89	7.75	OT	CG N
3.406	86.512	73339	6.00 152.400	2.406 61.112	637.00 111.475	1.500 38.100	934.000 4154.432	3.870 98.30	0.500 12.70	7.75	OT	CG N
3.406	86.512	73345	6.00 152.400	2.344 59.538	855.00 149.625	1.300 33.020	1111.000 4941.728	4.050 102.87	0.531 13.49	7.63	OT	CG N
3.406	86.512	73351	6.00 152.400	2.282 57.963	1103.00 193.025	1.200 30.480	1292.000 5746.816	4.300 109.22	0.562 14.27	7.65	OT	CG N
3.406	86.512	73357	6.00 152.400	2.220 56.388	1465.00 256.375	1.000 25.400	1477.000 6569.696	4.420 112.27	0.593 15.06	7.45	OT	CG N
3.406	86.512	73298	8.00 203.200	2.720 69.088	89.00 15.575	3.800 96.520	338.000 1503.424	3.350 85.09	0.343 8.71	9.78	OT	CG N
3.406	86.512	73304	8.00 203.200	2.682 68.123	109.00 19.075	3.600 91.440	396.000 1761.408	3.630 92.20	0.362 9.19	10.00	OT	CG N
3.406	86.512	73310	8.00 203.200	2.656 67.462	127.00 22.225	3.500 88.900	440.000 1957.120	3.760 95.50	0.375 9.53	10.00	OT	CG N
3.406	86.512	73316	8.00 203.200	2.620 66.548	152.00 26.600	3.200 81.280	492.000 2188.416	4.030 102.36	0.393 9.98	10.20	OT	CG N
3.406	86.512	73322	8.00 203.200	2.594 65.888	175.00 30.625	3.100 78.740	542.000 2410.816	4.170 105.92	0.406 10.31	10.30	OT	CG N
3.406	86.512	73328	8.00 203.200	2.532 64.313	243.00 42.525	2.700 68.580	656.000 2917.888	4.480 113.79	0.437 11.10	10.20	OT	CG N
3.406	86.512	73334	8.00 203.200	2.470 62.738	340.00 59.500	2.400 60.960	800.000 3558.400	4.680 118.87	0.468 11.89	10.00	OT	CG N
3.406	86.512	73340	8.00 203.200	2.406 61.112	457.00 79.975	2.000 50.800	934.000 4154.432	5.010 127.25	0.500 12.70	10.00	OT	CG N
3.406	86.512	73346	8.00 203.200	2.344 59.538	608.00 106.400	1.800 45.720	1111.000 4941.728	5.260 133.60	0.531 13.49	9.91	OT	CG N
3.406	86.512	73352	8.00 203.200	2.282 57.963	779.00 136.325	1.700 43.180	1292.000 5746.816	5.620 142.75	0.562 14.27	10.00	OT	CG N
3.406	86.512	73358	8.00 203.200	2.220 56.388	1037.00 181.475	1.400 35.560	1477.000 6569.696	5.750 146.05	0.593 15.06	9.70	OT	CG N
3.406	86.512	73299	10.00 254.000	2.720 69.088	71.00 12.425	4.800 121.920	338.000 1503.424	4.030 102.36	0.343 8.71	11.80	OT	CG N
3.406	86.512	73305	10.00 254.000	2.682 68.123	85.00 14.875	4.700 119.380	396.000 1761.408	4.450 113.03	0.362 9.19	12.30	OT	CG N
3.406	86.512	73311	10.00 254.000	2.656 67.462	100.00 17.500	4.400 111.760	440.000 1957.120	4.580 116.33	0.375 9.53	12.20	OT	CG N
3.406	86.512	73317	10.00 254.000	2.620 66.548	119.00 20.825	4.100 104.140	492.000 2188.416	4.930 125.22	0.393 9.98	12.50	OT	CG N
3.406	86.512	73323	10.00 254.000	2.594 65.888	138.00 24.150	3.900 99.060	542.000 2410.816	5.070 128.78	0.406 10.31	12.50	OT	CG N
3.406	86.512	73329	10.00 254.000	2.532 64.313	191.00 33.425	3.400 86.360	656.000 2917.888	5.460 138.68	0.437 11.10	12.50	OT	CG N
3.40												




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
3.406	86.512	73331	14.00 355.600	2.532 64.313	132.00 23.100	5.000 127.000	656.000 2917.888	7.510 190.75	0.437 11.10	17.20	OT	CG N
3.406	86.512	73337	14.00 355.600	2.470 62.738	184.00 32.200	4.400 111.760	800.000 3558.400	7.850 199.39	0.468 11.89	16.80	OT	CG N
3.406	86.512	73343	14.00 355.600	2.406 61.112	244.00 42.700	3.800 96.520	934.000 4154.432	8.500 215.90	0.500 12.70	17.00	OT	CG N
3.406	86.512	73349	14.00 355.600	2.344 59.538	326.00 57.050	3.400 86.360	1111.000 4941.728	8.900 226.06	0.531 13.49	16.80	OT	CG N
3.406	86.512	73355	14.00 355.600	2.282 57.963	416.00 72.800	3.100 78.740	1292.000 5746.816	9.550 242.57	0.562 14.27	17.00	OT	CG N
3.406	86.512	73361	14.00 355.600	2.220 56.388	551.00 96.425	2.700 68.580	1477.000 6569.696	9.780 248.41	0.593 15.06	16.50	OT	CG N
3.406	86.512	73362	16.00 406.400	2.720 69.088	43.00 7.525	7.900 200.660	338.000 1503.424	6.210 157.73	0.343 8.71	18.10	OT	CG N
3.406	86.512	73368	16.00 406.400	2.682 68.123	52.00 9.100	7.600 193.040	396.000 1761.408	6.820 173.23	0.362 9.19	18.80	OT	CG N
3.406	86.512	73314	16.00 406.400	2.656 67.462	61.00 10.675	7.200 182.880	440.000 1957.120	7.030 178.56	0.375 9.53	18.70	OT	CG N
3.406	86.512	73320	16.00 406.400	2.620 66.548	73.00 12.775	6.700 170.180	492.000 2188.416	7.530 191.26	0.393 9.98	19.20	OT	CG N
3.406	86.512	73326	16.00 406.400	2.594 65.888	83.00 14.525	6.500 165.100	542.000 2410.816	7.890 200.41	0.406 10.31	19.40	OT	CG N
3.406	86.512	73332	16.00 406.400	2.532 64.313	115.00 20.125	5.700 144.780	656.000 2917.888	8.490 215.65	0.437 11.10	19.40	OT	CG N
3.406	86.512	73338	16.00 406.400	2.470 62.738	160.00 28.000	5.000 127.000	800.000 3558.400	8.890 225.81	0.468 11.89	19.00	OT	CG N
3.406	86.512	73344	16.00 406.400	2.406 61.112	212.00 37.100	4.400 111.760	934.000 4154.432	9.630 244.60	0.500 12.70	19.30	OT	CG N
3.406	86.512	73350	16.00 406.400	2.344 59.538	283.00 49.525	3.900 99.060	1111.000 4941.728	10.100 256.54	0.531 13.49	19.00	OT	CG N
3.406	86.512	73356	16.00 406.400	2.282 57.963	361.00 63.175	3.600 91.440	1292.000 5746.816	10.800 274.32	0.562 14.27	19.30	OT	CG N
3.406	86.512	73362	16.00 406.400	2.220 56.388	477.00 83.475	3.100 78.740	1477.000 6569.696	11.100 281.94	0.593 15.06	18.70	OT	CG N
3.421	86.893	1879	3.84 97.536	2.921 74.193	50.00 8.750	2.500 63.500	124.000 551.552	1.380 35.05	0.250 6.35	5.50	HD	CG Z
3.5	88.900	4085	4.00 101.600	1.750 44.450	23293.004076.275	0.140 3.556	3298.000 14669.504	3.500 88.90	0.875 22.23	4.00	HD	CG N
3.5	88.900	S-1652	4.13 104.902	3.010 76.454	44.00 7.700	2.229 56.617	98.000 435.904	1.170 29.72	0.244 6.20	4.80	SST	CG N
3.5	88.900	4081	5.38 136.652	2.976 75.590	19.00 3.325	2.100 53.340	40.000 177.920	3.280 83.31	0.262 6.65	12.50	SPR	CG Z
3.5	88.900	4084	8.00 203.200	2.000 50.800	3240.00 567.000	0.670 17.018	2162.000 9616.576	6.560 166.62	0.750 19.05	8.75	HD	CG N
3.5	88.900	S-3169	8.50 215.900	3.064 77.826	14.00 2.450	5.400 137.160	75.000 333.600	1.910 48.51	0.218 5.54	7.75	SST	C N
3.5	88.900	4050	10.00 254.000	2.250 57.150	1191.00 208.425	1.300 33.020	1491.000 6631.968	6.090 154.69	0.625 15.88	9.75	SPR	CG N
3.656	92.862	73363	6.00 152.400	2.932 74.473	138.00 24.150	2.700 68.580	371.000 1650.208	2.530 64.26	0.362 9.19	7.00	OT	CG N
3.656	92.862	73369	6.00 152.400	2.906 73.812	161.00 28.175	2.600 66.040	411.000 1828.128	2.620 66.55	0.375 9.53	7.00	OT	CG N
3.656	92.862	73375	6.00 152.400	2.870 72.898	197.00 34.475	2.300 58.420	461.000 2050.528	2.750 69.85	0.393 9.98	7.00	OT	CG N
3.656	92.862	73381	6.00 152.400	2.844 72.238	228.00 39.900	2.200 55.880	507.000 2255.136	2.840 72.14	0.406 10.31	7.00	OT	CG N
3.656	92.862	73387	6.00 152.400	2.782 70.663	299.00 52.325	2.100 53.340	614.000 2731.072	3.170 80.52	0.437 11.10	7.25	OT	CG N
3.656	92.862	73393	6.00 152.400	2.720 69.088	405.00 70.875	1.900 48.260	750.000 3336.000	3.390 86.11	0.468 11.89	7.25	OT	CG N
3.656	92.862	73399	6.00 152.400	2.656 67.462	544.00 95.200	1.600 40.640	876.000 3896.448	3.630 92.20	0.500 12.70	7.25	OT	CG N
3.656	92.862	73405	6.00 152.400	2.594 65.888	713.00 124.775	1.500 38.100	1043.000 4639.264	3.850 97.79	0.531 13.49	7.25	OT	CG N
3.656	92.862	73411	6.00 152.400	2.532 64.313	922.00 161.350	1.300 33.020	1214.000 5399.872	4.070 103.38	0.562 14.27	7.25	OT	CG N
3.656	92.862	73417	6.00 152.400	2.470 62.738	1207.00 211.225	1.200 30.480	1389.000 6178.272	4.230 107.44	0.593 15.06	7.13	OT	CG N
3.656	92.862	73364	8.00 203.200	2.932 74.473	99.00 17.325	3.800 96.520	371.000 1650.208	3.260 82.80	0.362 9.19	9.01	OT	CG N
3.656	92.862	73370	8.00 203.200	2.906 73.812	117.00 20.475	3.500 88.900	411.000 1828.128	3.340 84.84	0.375 9.53	8.90	OT	CG N
3.656	92.862	73376	8.00 203.200	2.870 72.898	143.00 25.025	3.200 81.280	461.000 2050.528	3.500 88.90	0.393 9.98	8.90	OT	CG N
3.656	92.862	73382	8.00 203.200	2.844 72.238	165.00 28.875	3.100 78.740	507.000 2255.136	3.610 91.69	0.406 10.31	8.90	OT	CG N
3.656	92.862	73388	8.00 203.200	2.782 70.663	217.00 37.975	2.800 71.120	614.000 2731.072	4.040 102.62	0.437 11.10	9.25	OT	CG N
3.656	92.862	73394	8.00 203.200	2.720 69.088	292.00 51.100	2.600 66.040	750.000 3336.000	3.450 110.49	0.468 11.89	9.30	OT	CG N
3.656	92.862	73400	8.00 203.200	2.656 67.462	389.00 68.075	2.300 58.420	876.000 3896.448	4.680 118.87	0.500 12.70	9.35	OT	CG N
3.656	92.862	73406	8.00 203.200	2.594 65.888	506.00 88.550	2.100 53.340	1043.000 4639.264	4.990 126.75	0.531 13.49	9.40	OT	CG N
3.656	92.862	73412	8.00 203.200	2.532 64.313	657.00 114.975	1.800 45.720	1214.000 5399.872	5.270 133.86	0.562 14.27	9.38	OT	CG N
3.656	92.862	73418	8.00 203.200	2.470 62.738	853.00 149.275	1.600 40.640	1389.000 6178.272	5.490 139.45	0.593 15.06	9.25	OT	CG N
3.656	92.862	73365	10.00 254.000	2.932 74.473	78.00 13.650	4.700 119.380	371.000 1650.208	3.910 99.31	0.362 9.19	10.80	OT	CG N
3.656	92.862	73371	10.00 254.000	2.906 73.812	93.00 16.275	4.400 111.760	411.000 1828.128	4.010 101.85	0.375 9.53	10.70	OT	CG N
3.656	92.862	73377	10.00 254.000	2.870 72.898	112.00 19.600	4.100 104.140	461.000 2050.528	4.250 107.95	0.393 9.98	10.80	OT	CG N
3.656	92.862	73383	10.00 254.000	2.844 72.238	129.00 22.575	3.900 99.060	507.000 2255.136	4.380 111.25	0.406 10.31	10.80	OT	CG N
3.656	92.862	73389	10.00 254.000	2.782 70.663	169.00 29.575	3.600 91.440	614.000 2731.072	4.940 125.48	0.437 11.10	11.30	OT	CG N
3.656	92.862	73395	10.00 254.000	2.720 69.088	226.00 39.550	3.300 83.820	750.000 3336.000	5.340 135.64	0.468 11.89	11.40	OT	CG N
3.656	92.862	73401	10.00 254.000	2.656 67.462	304.00 53.200	2.900 73.660	876.000 3896.448	5.700 144.78	0.500 12.70	11.40	OT	CG N
3.656	92.862	73407	10.00 254.000	2.594 65.888	394.00 68.950	2.600 66.040	1043.000 4639.264	6.110 155.19	0.531 13.49	11.50	OT	CG N
3.656	92.862	73413	10.00 254.000	2.532 64.313	507.00 88.725	2.400 60.960	1214.000 5399.872	6.490 164.85	0.562 14.27	11.60	OT	CG N
3.656	92.862	73419	10.00 254.000	2.470 62.738	660.00 115.500	2.100 53.340	1389.000 6178.272	6.750 171.45	0.593 15.06	11.40	OT	CG N
3.656	92.862	73366	12.00 304.800	2.932 74.473	64.00 11.200	5.800 147.320	371.000 1650.208	4.620 117.35	0.362 9.19	12.80	OT	CG N
3.656	92.862	73372	12.00 304.800	2.906 73.812	76.00 13.300	5.400 137.160	411.000 1828.128	4.740 120.40	0.375 9.53	12.60	OT	CG N
3.656	92.862	73378	12.00 304.800	2.870 72.898	92.00 16.100	5.000 127.000	461.000 2050.528	5.010 127.25	0.393 9.98	12.80	OT	CG N
3.656	92.862	73384	12.00 304.800	2.844 72.238	106.00 18.550	4.800 121.920	507.000 2255.136	5.180 131.57	0.406 10.31	12.80	OT	CG N
3.656	92.862	73390	12.00 304.800	2.782 70.663	139.00 24.325	4.400 111.760	614.000 2731.072	5.830 148.08	0.437 11.10	13.30	OT	CG N
3.656												




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns'h
3.656	92.862	73404	16.00 406.400	2.656 67.462	182.00 31.850	4.800 121.920	876.000 3896.448	8.870 225.30	0.500 12.70	17.70	OT	CG N
3.656	92.862	73410	16.00 406.400	2.594 65.888	236.00 41.300	4.400 111.760	1043.000 4639.264	9.480 240.79	0.531 13.49	17.80	OT	CG N
3.656	92.862	73416	16.00 406.400	2.532 64.313	303.00 53.025	4.000 101.600	1214.000 5399.872	10.100 256.54	0.562 14.27	18.00	OT	CG N
3.656	92.862	73422	16.00 406.400	2.470 62.738	393.00 68.775	3.500 88.900	1389.000 6178.272	10.500 266.70	0.593 15.06	17.80	OT	CG N
3.687	93.650	S-3016	9.38 238.252	3.333 84.658	4.20 0.735	7.800 198.120	33.000 146.784	1.550 39.37	0.177 4.50	8.75	SST	CG N
3.75	95.250	S-1508	3.00 76.200	3.336 84.734	23.00 4.025	1.900 48.260	44.000 195.712	1.090 27.69	0.207 5.26	4.25	SST	C N
3.75	95.250	4076	5.50 139.700	3.126 79.400	96.00 16.800	2.200 55.880	212.000 942.976	2.030 51.56	0.312 7.92	5.50	SPR	C Z
3.75	95.250	4051	8.25 209.550	2.000 50.800	5910.00 1034.250	0.530 13.462	3140.000 13966.720	7.000 177.80	0.875 22.23	8.00	SPR	CG N
3.75	95.250	4099-C	17.00 431.800	3.130 79.502	36.00 6.300	5.700 144.780	208.000 925.184	3.410 86.61	0.310 7.87	11.00	HD	CG Z
3.828	97.231	S-1643	3.50 88.900	3.588 91.135	0.72 0.126	2.400 60.960	1.700 7.562	1.110 28.19	0.120 3.05	9.25	SST	CG N
3.875	98.425	4007	9.50 241.300	3.461 87.909	10.00 1.750	6.600 167.640	67.000 298.016	1.710 43.43	0.207 5.26	7.25	SPR	C Z
3.906	99.212	73423	6.00 152.400	3.156 80.162	136.00 23.800	2.800 71.120	386.000 1716.928	2.530 64.26	0.375 9.53	6.75	OT	CG N
3.906	99.212	73429	6.00 152.400	3.120 79.248	171.00 29.925	2.500 63.500	433.000 1925.984	2.600 66.04	0.393 9.98	6.63	OT	CG N
3.906	99.212	73435	6.00 152.400	3.094 78.588	190.00 33.250	2.500 63.500	477.000 2121.696	2.760 70.10	0.406 10.31	6.80	OT	CG N
3.906	99.212	73441	6.00 152.400	3.032 77.013	258.00 45.150	2.200 55.880	577.000 2566.496	3.000 76.20	0.437 11.10	6.87	OT	CG N
3.906	99.212	73447	6.00 152.400	2.970 75.438	339.00 59.325	2.100 53.340	706.000 3140.288	3.280 83.31	0.468 11.89	7.01	OT	CG N
3.906	99.212	73453	6.00 152.400	2.906 73.812	455.00 79.625	1.800 45.720	824.000 3665.152	3.500 88.90	0.500 12.70	7.00	OT	CG N
3.906	99.212	73459	6.00 152.400	2.844 72.238	595.00 104.125	1.700 43.180	982.000 4367.936	3.710 94.23	0.531 13.49	7.00	OT	CG N
3.906	99.212	73465	6.00 152.400	2.782 70.663	767.00 134.225	1.500 38.100	1144.000 5088.512	3.930 99.82	0.562 14.27	7.00	OT	CG N
3.906	99.212	73471	6.00 152.400	2.720 69.088	978.00 171.150	1.300 33.020	1310.000 5826.880	4.150 105.41	0.593 15.06	7.00	OT	CG N
3.906	99.212	73477	6.00 152.400	2.656 67.462	1307.00 228.725	1.200 30.480	1525.000 6783.200	4.220 107.19	0.625 15.88	6.75	OT	CG N
3.906	99.212	73424	8.00 203.200	3.156 80.162	99.00 17.325	3.900 99.060	386.000 1716.928	3.200 81.28	0.375 9.53	8.52	OT	CG N
3.906	99.212	73430	8.00 203.200	3.120 79.248	122.00 21.350	3.500 88.900	433.000 1925.984	3.330 84.58	0.393 9.98	8.48	OT	CG N
3.906	99.212	73436	8.00 203.200	3.094 78.588	136.00 23.800	3.500 88.900	477.000 2121.696	3.530 89.66	0.406 10.31	8.70	OT	CG N
3.906	99.212	73442	8.00 203.200	3.032 77.013	186.00 32.550	3.100 78.740	577.000 2566.496	3.820 97.03	0.437 11.10	8.75	OT	CG N
3.906	99.212	73448	8.00 203.200	2.970 75.438	242.00 42.350	2.900 73.660	706.000 3140.288	4.220 107.19	0.468 11.89	9.01	OT	CG N
3.906	99.212	73454	8.00 203.200	2.906 73.812	325.00 56.875	2.500 63.500	824.000 3665.152	4.500 114.30	0.500 12.70	9.00	OT	CG N
3.906	99.212	73460	8.00 203.200	2.844 72.238	425.00 74.375	2.300 58.420	982.000 4367.936	4.780 121.41	0.531 13.49	9.00	OT	CG N
3.906	99.212	73466	8.00 203.200	2.782 70.663	548.00 95.900	2.100 53.340	1144.000 5088.512	5.060 128.52	0.562 14.27	9.00	OT	CG N
3.906	99.212	73472	8.00 203.200	2.720 69.088	699.00 122.325	1.900 48.260	1310.000 5826.880	5.330 135.38	0.593 15.06	8.89	OT	CG N
3.906	99.212	73478	8.00 203.200	2.656 67.462	920.00 161.000	1.700 43.180	1525.000 6783.200	5.470 138.94	0.625 15.88	8.75	OT	CG N
3.906	99.212	73425	10.00 254.000	3.156 80.162	78.00 13.650	5.000 127.000	386.000 1716.928	3.850 97.79	0.375 9.53	10.30	OT	CG N
3.906	99.212	73431	10.00 254.000	3.120 79.248	96.00 16.800	4.500 114.300	433.000 1925.984	4.020 102.11	0.393 9.98	10.20	OT	CG N
3.906	99.212	73437	10.00 254.000	3.094 78.588	107.00 18.725	4.500 114.300	477.000 2121.696	4.270 108.46	0.406 10.31	10.50	OT	CG N
3.906	99.212	73443	10.00 254.000	3.032 77.013	143.00 25.025	4.000 101.600	577.000 2566.496	4.710 119.63	0.437 11.10	10.80	OT	CG N
3.906	99.212	73449	10.00 254.000	2.970 75.438	189.00 33.075	3.700 93.980	706.000 3140.288	5.140 130.56	0.468 11.89	11.00	OT	CG N
3.906	99.212	73455	10.00 254.000	2.906 73.812	253.00 44.275	3.300 83.820	824.000 3665.152	5.490 139.45	0.500 12.70	11.00	OT	CG N
3.906	99.212	73461	10.00 254.000	2.844 72.238	330.00 57.750	3.000 76.200	982.000 4367.936	5.850 148.59	0.531 13.49	11.00	OT	CG N
3.906	99.212	73467	10.00 254.000	2.782 70.663	420.00 73.500	2.700 68.580	1144.000 5088.512	6.260 159.00	0.562 14.27	11.10	OT	CG N
3.906	99.212	73473	10.00 254.000	2.720 69.088	536.00 93.800	2.400 60.960	1310.000 5826.880	6.590 167.39	0.593 15.06	11.10	OT	CG N
3.906	99.212	73479	10.00 254.000	2.656 67.462	710.00 124.250	2.100 53.340	1525.000 6783.200	6.720 170.69	0.625 15.88	10.70	OT	CG N
3.906	99.212	73426	12.00 304.800	3.156 80.162	65.00 11.375	5.900 149.860	386.000 1716.928	4.480 113.79	0.375 9.53	11.90	OT	CG N
3.906	99.212	73432	12.00 304.800	3.120 79.248	79.00 13.825	5.500 139.700	433.000 1925.984	4.720 119.89	0.393 9.98	12.00	OT	CG N
3.906	99.212	73438	12.00 304.800	3.094 78.588	88.00 15.400	5.400 137.160	477.000 2121.696	5.010 127.25	0.406 10.31	12.40	OT	CG N
3.906	99.212	73444	12.00 304.800	3.032 77.013	120.00 21.000	4.800 121.920	577.000 2566.496	5.450 138.43	0.437 11.10	12.50	OT	CG N
3.906	99.212	73450	12.00 304.800	2.970 75.438	154.00 26.950	4.600 116.840	706.000 3140.288	6.090 154.69	0.468 11.89	13.00	OT	CG N
3.906	99.212	73456	12.00 304.800	2.906 73.812	207.00 36.225	4.000 101.600	824.000 3665.152	6.490 164.85	0.500 12.70	13.00	OT	CG N
3.906	99.212	73462	12.00 304.800	2.844 72.238	270.00 47.250	3.600 91.440	982.000 4367.936	6.910 143.90	0.531 13.49	13.00	OT	CG N
3.906	99.212	73468	12.00 304.800	2.782 70.663	345.00 60.375	3.300 83.820	1144.000 5088.512	7.370 187.20	0.562 14.27	13.10	OT	CG N
3.906	99.212	73474	12.00 304.800	2.720 69.088	439.00 76.825	3.000 76.200	1310.000 5826.880	7.790 197.87	0.593 15.06	13.10	OT	CG N
3.906	99.212	73480	12.00 304.800	2.656 67.462	578.00 101.150	2.600 66.040	1525.000 6783.200	7.970 202.44	0.625 15.88	12.70	OT	CG N
3.906	99.212	73477	14.00 355.600	3.156 80.162	54.00 9.450	7.200 182.880	386.000 1716.928	5.230 132.84	0.375 9.53	14.00	OT	CG N
3.906	99.212	73433	14.00 355.600	3.120 79.248	66.00 11.550	6.600 167.640	433.000 1925.984	5.500 139.70	0.393 9.98	14.00	OT	CG N
3.906	99.212	73439	14.00 355.600	3.094 78.588	74.00 12.950	6.400 162.560	477.000 2121.696	5.810 147.57	0.406 10.31	14.30	OT	CG N
3.906	99.212	73445	14.00 355.600	3.032 77.013	100.00 17.500	5.800 147.320	577.000 2566.496	6.360 161.54	0.437 11.10	14.60	OT	CG N
3.906	99.212	73451	14.00 355.600	2.970 75.438	131.00 22.925	5.400 137.160	706.000 3140.288	7.000 177.80	0.468 11.89	15.00	OT	CG N
3.906	99.212	73457	14.00 355.600	2.906 73.812	175.00 30.625	4.700 119.380	824.000 3665.152	7.500 190.50	0.500 12.70	15.00	OT	CG N
3.906	99.212	73463	14.00 355.600	2.844 72.238	229.00 40.075	4.300 109.220	982.000 4367.936	7.960 202.18	0.531 13.49	15.00	OT	CG N
3.906	99.212	73469	14.00 355.600	2.782 70.663	289.00 50.575	4.000 101.600	1144.000 5088.512	8.580 217.93	0.562 14.27	15.30		




Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish
4.156 105.562	73489	6.00 152.400	3.370 85.598	151.00 26.425	2.700 68.580	408.000 1814.784	2.460 62.48	0.393 9.98	6.25	OT	CG	N
4.156 105.562	73495	6.00 152.400	3.344 84.938	165.00 28.875	2.700 68.580	449.000 1997.152	2.640 67.06	0.406 10.31	6.50	OT	CG	N
4.156 105.562	73501	6.00 152.400	3.282 83.363	227.00 39.725	2.400 60.960	545.000 2424.160	2.840 72.14	0.437 11.10	6.50	OT	CG	N
4.156 105.562	73507	6.00 152.400	3.220 81.788	306.00 53.550	2.200 55.880	666.000 2962.368	3.040 77.22	0.468 11.89	6.50	OT	CG	N
4.156 105.562	73513	6.00 152.400	3.156 80.162	387.00 67.725	2.000 50.800	778.000 3460.544	3.380 85.85	0.500 12.70	6.75	OT	CG	N
4.156 105.562	73519	6.00 152.400	3.094 78.588	533.00 93.275	1.700 43.180	928.000 4127.744	3.450 87.63	0.531 13.49	6.50	OT	CG	N
4.156 105.562	73525	6.00 152.400	3.032 77.013	686.00 120.050	1.600 40.640	1081.000 4808.288	3.650 92.71	0.562 14.27	6.50	OT	CG	N
4.156 105.562	73531	6.00 152.400	2.970 75.438	873.00 152.775	1.400 35.560	1239.000 5511.072	3.850 97.79	0.593 15.06	6.50	OT	CG	N
4.156 105.562	73484	8.00 203.200	3.406 86.512	91.00 15.925	4.000 101.600	364.000 1619.072	2.920 74.17	0.375 9.53	7.80	OT	CG	N
4.156 105.562	73490	8.00 203.200	3.370 85.598	110.00 19.250	3.700 93.980	408.000 1814.784	3.100 78.74	0.393 9.98	7.88	OT	CG	N
4.156 105.562	73496	8.00 203.200	3.344 84.938	119.00 20.825	3.800 96.520	449.000 1997.152	3.350 85.09	0.406 10.31	8.25	OT	CG	N
4.156 105.562	73502	8.00 203.200	3.282 83.363	163.00 28.525	3.300 83.820	545.000 2424.160	3.610 91.69	0.437 11.10	8.25	OT	CG	N
4.156 105.562	73508	8.00 203.200	3.220 81.788	220.00 38.500	3.000 76.200	666.000 2962.368	3.860 98.04	0.468 11.89	8.25	OT	CG	N
4.156 105.562	73514	8.00 203.200	3.156 80.162	278.00 48.650	2.800 71.120	778.000 3460.544	4.310 109.47	0.500 12.70	8.63	OT	CG	N
4.156 105.562	73520	8.00 203.200	3.094 78.588	380.00 66.500	2.400 60.960	928.000 4127.744	4.410 112.01	0.531 13.49	8.31	OT	CG	N
4.156 105.562	73526	8.00 203.200	3.032 77.013	485.00 84.875	2.200 55.880	1081.000 4808.288	4.710 119.63	0.562 14.27	8.38	OT	CG	N
4.156 105.562	73532	8.00 203.200	2.970 75.438	616.00 107.800	2.000 50.800	1239.000 5511.072	4.970 126.24	0.593 15.06	8.38	OT	CG	N
4.156 105.562	73485	10.00 254.000	3.406 86.512	70.00 12.250	5.200 132.080	364.000 1619.072	3.560 90.42	0.375 9.53	9.50	OT	CG	N
4.156 105.562	73491	10.00 254.000	3.370 85.598	86.00 15.050	4.800 121.920	408.000 1814.784	3.730 94.74	0.393 9.98	9.50	OT	CG	N
4.156 105.562	73497	10.00 254.000	3.344 84.938	93.00 16.275	4.900 124.460	449.000 1997.152	4.060 103.12	0.406 10.31	10.00	OT	CG	N
4.156 105.562	4099-F	10.00 254.000	3.344 84.938	129.00 22.575	3.100 78.740	400.000 1779.200	3.150 80.01	0.406 10.31	7.75	SPR	CG	N
4.156 105.562	73503	10.00 254.000	3.282 83.363	127.00 22.225	4.300 109.220	545.000 2424.160	4.370 111.00	0.437 11.10	10.00	OT	CG	N
4.156 105.562	73509	10.00 254.000	3.220 81.788	172.00 30.100	3.900 99.060	666.000 2962.368	4.680 118.87	0.468 11.89	10.00	OT	CG	N
4.156 105.562	73515	10.00 254.000	3.156 80.162	216.00 37.800	3.600 91.440	778.000 3460.544	5.250 133.35	0.500 12.70	10.50	OT	CG	N
4.156 105.562	73521	10.00 254.000	3.094 78.588	295.00 51.625	3.100 78.740	928.000 4127.744	5.380 136.65	0.531 13.49	10.10	OT	CG	N
4.156 105.562	73527	10.00 254.000	3.032 77.013	377.00 65.975	2.900 73.660	1081.000 4808.288	5.730 145.54	0.562 14.27	10.20	OT	CG	N
4.156 105.562	73533	10.00 254.000	2.970 75.438	476.00 83.300	2.600 66.040	1239.000 5511.072	6.080 154.43	0.593 15.06	10.30	OT	CG	N
4.156 105.562	73486	12.00 304.800	3.406 86.512	58.00 10.150	6.300 160.020	364.000 1619.072	4.170 105.92	0.375 9.53	11.10	OT	CG	N
4.156 105.562	73492	12.00 304.800	3.370 85.598	71.00 12.425	5.800 147.320	408.000 1814.784	4.370 111.00	0.393 9.98	11.10	OT	CG	N
4.156 105.562	73498	12.00 304.800	3.344 84.938	76.00 13.300	5.900 149.860	449.000 1997.152	4.770 121.16	0.406 10.31	11.70	OT	CG	N
4.156 105.562	73504	12.00 304.800	3.282 83.363	105.00 18.375	5.200 132.080	545.000 2424.160	5.140 130.56	0.437 11.10	11.80	OT	CG	N
4.156 105.562	73510	12.00 304.800	3.220 81.788	141.00 24.675	4.700 119.380	666.000 2962.368	5.500 139.70	0.468 11.89	11.80	OT	CG	N
4.156 105.562	73516	12.00 304.800	3.156 80.162	175.00 30.625	4.400 111.760	778.000 3460.544	6.250 158.75	0.500 12.70	12.50	OT	CG	N
4.156 105.562	73522	12.00 304.800	3.094 78.588	240.00 42.000	3.900 99.060	928.000 4127.744	6.370 161.80	0.531 13.49	12.00	OT	CG	N
4.156 105.562	73528	12.00 304.800	3.032 77.013	309.00 54.075	3.500 88.900	1081.000 4808.288	6.740 171.20	0.562 14.27	12.00	OT	CG	N
4.156 105.562	73534	12.00 304.800	2.970 75.438	388.00 67.900	3.200 81.280	1239.000 5511.072	7.190 182.63	0.593 15.06	12.10	OT	CG	N
4.156 105.562	73487	14.00 355.600	3.406 86.512	49.00 8.575	7.400 187.960	364.000 1619.072	4.780 121.41	0.375 9.53	12.80	OT	CG	N
4.156 105.562	73493	14.00 355.600	3.370 85.598	60.00 10.500	6.800 172.720	408.000 1814.784	5.020 127.51	0.393 9.98	12.80	OT	CG	N
4.156 105.562	73499	14.00 355.600	3.344 84.938	65.00 11.375	6.900 175.260	449.000 1997.152	5.430 137.92	0.406 10.31	13.40	OT	CG	N
4.156 105.562	73505	14.00 355.600	3.282 83.363	89.00 15.575	6.100 154.940	545.000 2424.160	5.900 149.86	0.437 11.10	13.50	OT	CG	N
4.156 105.562	73511	14.00 355.600	3.220 81.788	120.00 21.000	5.600 142.240	666.000 2962.368	6.320 160.53	0.468 11.89	13.50	OT	CG	N
4.156 105.562	73517	14.00 355.600	3.156 80.162	150.00 26.250	5.200 132.080	778.000 3460.544	7.120 180.85	0.500 12.70	14.20	OT	CG	N
4.156 105.562	73523	14.00 355.600	3.094 78.588	204.00 35.700	4.500 114.300	928.000 4127.744	7.300 185.42	0.531 13.49	13.70	OT	CG	N
4.156 105.562	73529	14.00 355.600	3.032 77.013	260.00 45.500	4.200 106.680	1081.000 4808.288	7.800 198.12	0.562 14.27	13.90	OT	CG	N
4.156 105.562	73535	14.00 355.600	2.970 75.438	328.00 57.400	3.800 96.520	1239.000 5511.072	8.300 210.82	0.593 15.06	14.00	OT	CG	N
4.156 105.562	73488	16.00 406.400	3.406 86.512	43.00 7.525	8.500 215.900	364.000 1619.072	5.350 135.89	0.375 9.53	14.30	OT	CG	N
4.156 105.562	73494	16.00 406.400	3.370 85.598	52.00 9.100	7.900 200.660	408.000 1814.784	5.700 144.78	0.393 9.98	14.50	OT	CG	N
4.156 105.562	73500	16.00 406.400	3.344 84.938	56.00 9.800	8.000 203.200	449.000 1997.152	6.140 155.96	0.406 10.31	15.10	OT	CG	N
4.156 105.562	73506	16.00 406.400	3.282 83.363	77.00 13.475	7.100 180.340	545.000 2424.160	6.670 169.42	0.437 11.10	15.30	OT	CG	N
4.156 105.562	73512	16.00 406.400	3.220 81.788	104.00 18.200	6.400 162.560	666.000 2962.368	7.140 181.36	0.468 11.89	15.30	OT	CG	N
4.156 105.562	73518	16.00 406.400	3.156 80.162	129.00 22.575	6.000 152.400	778.000 3460.544	8.130 206.50	0.500 12.70	16.30	OT	CG	N
4.156 105.562	73524	16.00 406.400	3.094 78.588	176.00 30.800	5.300 134.620	928.000 4127.744	8.280 210.31	0.531 13.49	15.60	OT	CG	N
4.156 105.562	73530	16.00 406.400	3.032 77.013	225.00 39.375	4.800 121.920	1081.000 4808.288	8.850 224.79	0.562 14.27	15.80	OT	CG	N
4.156 105.562	73536	16.00 406.400	2.970 75.438	283.00 49.525	4.400 111.760	1239.000 5511.072	9.420 239.27	0.593 15.06	15.90	OT	CG	N
4.25 107.950	4021	10.80 274.320	2.250 57.150	6979.00 1221.325	0.500 12.700	3492.000 15532.416	8.000 203.20	1.000 25.40	8.00	SPR	CG	N
4.375 111.125	4022	8.00 203.200	2.499 63.475	6091.00 1065.925	0.470 11.938	2863.000 1274.624	6.100 154.94	0.938 23.83	6.50	SPR	CG	N
4.406 111.912	73537	6.00 152.400	3.532 89.713	197.00 34.475	2.600 66.040	515.000 2290.720	2.730 69.34	0.437 11.10	6.26	OT	CG	N
4.406 111.912	73543	6.00 152.400	3.470 88.138	266.00 46.550	2.400 60.960	631.000 2806.688	2.920 74.17	0.468 11.89	6.25	OT	CG	N
4.406 111.912	73549	6.00 152.400	3.406 86.512	355.00 62.125	2.100 53.34							




O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Fns h								
4.406	111.912	73558	12.00	304.800	3.344	84.938	210.00	36.750	4.200	106.680	879.000	3909.792	6.030	153.16	0.531	13.49	11.40	OT	CG	N
4.406	111.912	73564	12.00	304.800	3.282	83.363	266.00	46.550	3.900	99.060	1025.000	4559.200	6.460	164.08	0.562	14.27	11.50	OT	CG	N
4.406	111.912	73570	12.00	304.800	3.220	81.788	338.00	59.150	3.500	88.900	1175.000	5226.400	6.810	172.97	0.593	15.06	11.50	OT	CG	N
4.406	111.912	73576	12.00	304.800	3.156	80.162	422.00	73.850	3.200	81.280	1369.000	6089.312	7.260	184.40	0.625	15.88	11.60	OT	CG	N
4.406	111.912	73541	14.00	355.600	3.532	89.713	78.00	13.650	6.600	167.640	515.000	2290.720	5.570	141.48	0.437	11.10	12.80	OT	CG	N
4.406	111.912	73547	14.00	355.600	3.470	88.138	103.00	18.025	6.100	154.940	631.000	2806.688	6.070	154.18	0.468	11.89	13.00	OT	CG	N
4.406	111.912	73553	14.00	355.600	3.406	86.512	136.00	23.800	5.400	137.160	737.000	3278.176	6.540	166.12	0.500	12.70	13.10	OT	CG	N
4.406	111.912	73559	14.00	355.600	3.344	84.938	175.00	30.625	5.000	127.000	879.000	3909.792	7.020	178.31	0.531	13.49	13.20	OT	CG	N
4.406	111.912	73565	14.00	355.600	3.282	83.363	224.00	39.200	4.600	116.840	1025.000	4559.200	7.460	189.48	0.562	14.27	13.30	OT	CG	N
4.406	111.912	73571	14.00	355.600	3.220	81.788	285.00	49.875	4.100	104.140	1175.000	5226.400	7.860	199.64	0.593	15.06	13.30	OT	CG	N
4.406	111.912	73577	14.00	355.600	3.156	80.162	353.00	61.775	3.900	99.060	1369.000	6089.312	8.440	214.38	0.625	15.88	13.50	OT	CG	N
4.406	111.912	73542	16.00	406.400	3.532	89.713	67.00	11.725	7.700	195.580	515.000	2290.720	6.340	161.04	0.437	11.10	14.50	OT	CG	N
4.406	111.912	73548	16.00	406.400	3.470	88.138	89.00	15.575	7.100	180.340	631.000	2806.688	6.870	174.50	0.468	11.89	14.70	OT	CG	N
4.406	111.912	73554	16.00	406.400	3.406	86.512	118.00	20.650	6.200	157.480	737.000	3278.176	7.390	187.71	0.500	12.70	14.80	OT	CG	N
4.406	111.912	73560	16.00	406.400	3.344	84.938	151.00	26.425	5.800	147.320	879.000	3909.792	7.970	202.44	0.531	13.49	15.00	OT	CG	N
4.406	111.912	73566	16.00	406.400	3.282	83.363	194.00	33.950	5.300	134.620	1025.000	4559.200	8.440	214.38	0.562	14.27	15.00	OT	CG	N
4.406	111.912	73572	16.00	406.400	3.220	81.788	246.00	43.050	4.800	121.920	1175.000	5226.400	8.920	226.57	0.593	15.06	15.00	OT	CG	N
4.406	111.912	73578	16.00	406.400	3.156	80.162	306.00	53.550	4.500	114.300	1369.000	6089.312	9.540	242.32	0.625	15.88	15.30	OT	CG	N
4.5	114.300	4023	4.00	101.600	3.250	82.550	167.50	293.125	0.710	18.034	1194.000	5310.912	2.660	67.56	0.625	15.88	4.25	SPR	CG	Z
4.5	114.300	4041	6.00	152.400	3.376	85.750	52.00	91.350	1.700	43.180	893.000	3972.064	3.650	92.71	0.562	14.27	6.50	SPR	CG	Z
4.5	114.300	4046	6.50	165.100	3.564	90.526	263.00	46.025	2.100	53.340	550.000	2446.400	2.810	71.37	0.468	11.89	6.00	SPR	CG	Z
4.5	114.300	10940	9.00	228.600	3.820	97.028	63.00	11.025	3.600	91.440	225.000	1000.800	2.130	54.10	0.340	8.64	6.25	SPR	CG	N
4.5	114.300	4087	10.50	266.700	2.500	63.500	558.00	977.900	0.820	20.828	4580.000	20371.840	8.000	203.20	1.000	25.40	8.00	HD	CG	N
4.687	119.050	4079	6.00	152.400	4.187	106.350	21.00	3.675	4.400	111.760	94.000	418.112	1.250	31.75	0.250	6.35	5.00	SPR	CG	N
4.687	119.050	73579	6.00	152.400	3.901	99.085	124.00	21.700	2.900	73.660	364.000	1619.072	2.160	54.86	0.393	9.98	5.50	OT	CG	N
4.687	119.050	73585	6.00	152.400	3.875	98.425	137.00	23.975	2.900	73.660	401.000	1783.648	2.280	57.91	0.406	10.31	5.63	OT	CG	N
4.687	119.050	73591	6.00	152.400	3.813	96.850	182.00	31.850	2.700	68.580	486.000	2161.728	2.510	63.75	0.437	11.10	5.75	OT	CG	N
4.687	119.050	73597	6.00	152.400	3.751	95.275	245.00	42.875	2.400	60.960	595.000	2646.560	2.690	68.33	0.468	11.89	5.75	OT	CG	N
4.687	119.050	73603	6.00	152.400	3.687	93.650	326.00	57.050	2.100	53.340	696.000	3095.808	2.880	73.15	0.500	12.70	5.75	OT	CG	N
4.687	119.050	73609	6.00	152.400	3.625	92.075	398.00	69.650	2.100	53.340	830.000	3691.840	3.190	81.03	0.531	13.49	6.00	OT	CG	N
4.687	119.050	73615	6.00	152.400	3.563	90.500	511.00	89.425	1.900	48.260	968.000	4305.664	3.370	85.60	0.562	14.27	6.00	OT	CG	N
4.687	119.050	73621	6.00	152.400	3.501	88.925	648.00	113.400	1.700	43.180	1110.000	4937.280	3.560	90.42	0.593	15.06	6.00	OT	CG	N
4.687	119.050	73627	6.00	152.400	3.437	87.300	818.00	143.150	1.600	40.640	1294.000	5755.712	3.750	95.25	0.625	15.88	6.00	OT	CG	N
4.687	119.050	73580	8.00	203.200	3.901	99.085	89.00	15.575	4.100	104.140	364.000	1619.072	2.700	68.58	0.393	9.98	6.88	OT	CG	N
4.687	119.050	73586	8.00	203.200	3.875	98.425	100.00	17.500	4.000	101.600	401.000	1783.648	2.840	72.14	0.406	10.31	7.00	OT	CG	N
4.687	119.050	73592	8.00	203.200	3.813	96.850	130.00	22.750	3.700	93.980	486.000	2161.728	3.170	80.52	0.437	11.10	7.25	OT	CG	N
4.687	119.050	73598	8.00	203.200	3.751	95.275	175.00	30.625	3.400	86.360	595.000	2646.560	3.390	86.11	0.468	11.89	7.25	OT	CG	N
4.687	119.050	73604	8.00	203.200	3.687	93.650	233.00	40.775	3.000	76.200	696.000	3095.808	3.630	92.20	0.500	12.70	7.25	OT	CG	N
4.687	119.050	73610	8.00	203.200	3.625	92.075	283.00	49.925	2.900	73.660	830.000	3691.840	4.050	102.87	0.531	13.49	7.63	OT	CG	N
4.687	119.050	73616	8.00	203.200	3.563	90.500	363.00	63.525	2.700	68.580	968.000	4305.664	4.290	108.97	0.562	14.27	7.63	OT	CG	N
4.687	119.050	73622	8.00	203.200	3.501	88.925	461.00	80.675	2.400	60.960	1110.000	4937.280	4.520	114.81	0.593	15.06	7.63	OT	CG	N
4.687	119.050	73628	8.00	203.200	3.437	87.300	574.00	100.450	2.300	58.420	1294.000	5755.712	4.810	122.17	0.625	15.88	7.70	OT	CG	N
4.687	119.050	73581	10.00	254.000	3.901	99.085	69.00	12.075	5.300	134.620	364.000	1619.072	3.240	82.30	0.393	9.98	8.25	OT	CG	N
4.687	119.050	73587	10.00	254.000	3.875	98.425	78.00	13.650	5.100	129.540	401.000	1783.648	3.400	86.36	0.406	10.31	8.37	OT	CG	N
4.687	119.050	73593	10.00	254.000	3.813	96.850	101.00	17.675	4.800	121.920	486.000	2161.728	3.820	97.03	0.437	11.10	8.75	OT	CG	N
4.687	119.050	73599	10.00	254.000	3.751	95.275	136.00	23.800	4.400	111.760	595.000	2646.560	4.100	104.14	0.468	11.89	8.75	OT	CG	N
4.687	119.050	73605	10.00	254.000	3.687	93.650	181.00	31.675	3.800	96.520	696.000	3095.808	4.380	111.25	0.500	12.70	8.75	OT	CG	N
4.687	119.050	73611	10.00	254.000	3.625	92.075	220.00	38.500	3.800	96.520	830.000	3691.840	4.910	124.71	0.531	13.49	9.25	OT	CG	N
4.687	119.050	73617	10.00	254.000	3.563	90.500	282.00	49.350	3.400	86.360	968.000	4305.664	5.200	132.08	0.562	14.27	9.25	OT	CG	N
4.687	119.050	73623	10.00	254.000	3.501	88.925	351.00	61.425	3.200	81.280	1110.000	4937.280	5.560	141.22	0.59					



Century Spring

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg. Max. Defl. Inches mm	Sugg. Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	E n d s	F n s h
4.906	124.612	73639	6.00 152.400	3.906 99.212	280.00 49.000	2.400 60.960	667.000 2966.816	2.880 73.15	0.500 12.70	5.75	OT	CG N
4.906	124.612	73645	6.00 152.400	3.844 97.638	364.00 63.700	2.200 55.880	796.000 3540.608	3.050 77.47	0.531 13.49	5.75	OT	CG N
4.906	124.612	73651	6.00 152.400	3.782 96.063	466.00 81.550	2.000 50.800	928.000 4127.744	3.230 82.04	0.562 14.27	5.75	OT	CG N
4.906	124.612	73657	6.00 152.400	3.720 94.488	591.00 103.425	1.800 45.720	1064.000 4732.672	3.410 86.61	0.593 15.06	5.75	OT	CG N
4.906	124.612	73663	6.00 152.400	3.656 92.862	746.00 130.550	1.700 43.180	1241.000 5519.968	3.590 91.19	0.625 15.88	5.75	OT	CG N
4.906	124.612	73634	8.00 203.200	3.970 100.838	150.00 26.250	3.800 96.520	570.000 2535.360	3.400 86.36	0.468 11.89	7.26	OT	CG N
4.906	124.612	73640	8.00 203.200	3.906 99.212	200.00 35.000	3.300 83.820	667.000 2966.816	3.630 92.20	0.500 12.70	7.25	OT	CG N
4.906	124.612	73646	8.00 203.200	3.844 97.638	260.00 45.500	3.100 78.740	796.000 3540.608	3.850 97.79	0.531 13.49	7.25	OT	CG N
4.906	124.612	73652	8.00 203.200	3.782 96.063	333.00 58.275	2.800 71.120	928.000 4127.744	4.080 103.63	0.562 14.27	7.25	OT	CG N
4.906	124.612	73658	8.00 203.200	3.720 94.488	422.00 73.850	2.500 63.500	1064.000 4732.672	4.300 109.22	0.593 15.06	7.25	OT	CG N
4.906	124.612	73664	8.00 203.200	3.656 92.862	520.00 91.000	2.400 60.960	1241.000 5519.968	4.610 117.09	0.625 15.88	7.38	OT	CG N
4.906	124.612	73635	10.00 254.000	3.970 100.838	117.00 20.475	4.900 124.460	570.000 2535.360	4.090 103.89	0.468 11.89	8.74	OT	CG N
4.906	124.612	73641	10.00 254.000	3.906 99.212	156.00 27.300	4.300 109.220	667.000 2966.816	4.370 111.00	0.500 12.70	8.73	OT	CG N
4.906	124.612	73647	10.00 254.000	3.844 97.638	202.00 35.350	3.900 99.060	796.000 3540.608	4.650 118.11	0.531 13.49	8.76	OT	CG N
4.906	124.612	73653	10.00 254.000	3.782 96.063	250.00 43.750	3.700 93.980	928.000 4127.744	5.060 128.52	0.562 14.27	9.00	OT	CG N
4.906	124.612	73659	10.00 254.000	3.720 94.488	328.00 57.400	3.200 81.280	1064.000 4732.672	5.190 131.83	0.593 15.06	8.76	OT	CG N
4.906	124.612	73665	10.00 254.000	3.656 92.862	399.00 69.825	3.100 78.740	1241.000 5519.968	5.630 143.00	0.625 15.88	9.01	OT	CG N
4.906	124.612	73636	12.00 304.800	3.970 100.838	96.00 16.800	5.900 149.860	570.000 2535.360	4.780 121.41	0.468 11.89	10.20	OT	CG N
4.906	124.612	73642	12.00 304.800	3.906 99.212	127.00 22.225	5.200 132.080	667.000 2966.816	5.140 130.56	0.500 12.70	10.30	OT	CG N
4.906	124.612	73648	12.00 304.800	3.844 97.638	165.00 28.875	4.800 121.920	796.000 3540.608	5.450 138.43	0.531 13.49	10.30	OT	CG N
4.906	124.612	73654	12.00 304.800	3.782 96.063	206.00 36.050	4.500 114.300	928.000 4127.744	5.900 149.86	0.562 14.27	10.50	OT	CG N
4.906	124.612	73660	12.00 304.800	3.720 94.488	268.00 46.900	4.000 101.600	1064.000 4732.672	6.090 154.69	0.593 15.06	10.30	OT	CG N
4.906	124.612	73666	12.00 304.800	3.656 92.862	329.00 57.575	3.800 96.520	1241.000 5519.968	6.560 166.62	0.625 15.88	10.50	OT	CG N
4.906	124.612	73637	14.00 355.600	3.970 100.838	81.00 14.175	7.000 177.800	570.000 2535.360	5.490 139.45	0.468 11.89	11.70	OT	CG N
4.906	124.612	73643	14.00 355.600	3.906 99.212	108.00 18.900	6.200 157.480	667.000 2966.816	5.860 148.84	0.500 12.70	11.70	OT	CG N
4.906	124.612	73649	14.00 355.600	3.844 97.638	140.00 24.500	5.700 144.780	796.000 3540.608	6.240 158.50	0.531 13.49	11.70	OT	CG N
4.906	124.612	73655	14.00 355.600	3.782 96.063	175.00 30.625	5.300 134.620	928.000 4127.744	6.740 171.20	0.562 14.27	12.00	OT	CG N
4.906	124.612	73661	14.00 355.600	3.720 94.488	222.00 38.850	4.800 121.920	1064.000 4732.672	7.100 180.34	0.593 15.06	12.00	OT	CG N
4.906	124.612	73667	14.00 355.600	3.656 92.862	273.00 47.775	4.500 114.300	1241.000 5519.968	7.650 194.31	0.625 15.88	12.20	OT	CG N
4.906	124.612	73638	16.00 406.400	3.970 100.838	70.00 12.250	8.100 205.740	570.000 2535.360	6.210 157.73	0.468 11.89	13.30	OT	CG N
4.906	124.612	73644	16.00 406.400	3.906 99.212	93.00 16.275	7.200 182.880	667.000 2966.816	6.650 168.91	0.500 12.70	13.30	OT	CG N
4.906	124.612	73650	16.00 406.400	3.844 97.638	121.00 21.175	6.600 167.640	796.000 3540.608	7.050 179.07	0.531 13.49	13.30	OT	CG N
4.906	124.612	73656	16.00 406.400	3.782 96.063	152.00 26.600	6.100 154.940	928.000 4127.744	7.590 192.79	0.562 14.27	13.50	OT	CG N
4.906	124.612	73662	16.00 406.400	3.720 94.488	193.00 33.775	5.500 139.700	1064.000 4732.672	7.990 202.95	0.593 15.06	13.50	OT	CG N
4.906	124.612	73668	16.00 406.400	3.656 92.862	238.00 41.650	5.200 132.080	1241.000 5519.968	8.590 218.19	0.625 15.88	13.70	OT	CG N
5	127.000	4053	5.00 127.000	3.000 76.200	11230.001965.250	0.400 10.160	4200.000 18681.600	4.000 101.60	1.000 25.40	4.00	HD	CG N
5	127.000	4083	8.00 203.200	3.812 96.825	465.00 81.375	2.000 50.800	934.000 4154.432	3.860 98.04	0.594 15.09	6.50	HD	CG N
5	127.000	4031	12.00 304.800	4.000 101.600	123.00 21.525	4.700 119.380	582.000 2588.736	5.000 127.00	0.500 12.70	10.00	SPR	CG N
5	127.000	4088	12.00 304.800	3.124 79.350	2767.00 484.225	1.300 33.020	3600.000 16012.800	7.500 190.50	0.938 23.83	8.00	HD	CG N
5.25	133.350	4022-A	4.00 101.600	4.926 125.120	4.10 0.718	3.400 86.360	14.000 62.272	0.560 14.22	0.162 4.11	3.50	SST	CG N
5.5	139.700	4036	12.00 304.800	4.438 112.725	162.00 28.350	3.900 99.060	635.000 2824.480	4.120 104.65	0.531 13.49	7.75	SPR	CG N
5.5	139.700	4000-A	18.80 477.520	4.500 114.300	78.00 13.650	6.800 172.720	532.000 2366.336	5.630 143.00	0.500 12.70	11.30	SPR	CG N
5.75	146.050	4097	12.00 304.800	4.000 101.600	1818.00 318.150	1.400 35.560	2550.000 11342.400	5.250 133.35	0.875 22.23	6.00	HD	CG N
6	152.400	4034	3.50 88.900	4.626 117.500	2135.00 373.625	0.600 15.240	1220.000 5426.560	2.060 52.32	0.687 17.45	3.00	SPR	CG N
6	152.400	4094	8.75 222.250	4.250 107.950	1669.00 292.075	1.500 38.100	2440.000 10853.120	5.030 127.76	0.875 22.23	5.75	HD	CG N
6	152.400	4091	24.00 609.600	4.624 117.450	175.00 30.625	7.000 177.800	1210.000 5382.080	9.800 248.92	0.688 17.48	14.30	HD	CG N
6.06	153.924	4099-A	17.00 431.800	5.494 139.548	4.80 0.840	13.000 330.200	64.000 284.672	3.679 93.45	0.283 7.19	12.00	HD	C GI
6.125	155.575	4078	14.00 355.600	5.687 144.450	3.50 0.613	12.000 304.800	44.000 195.712	1.530 38.86	0.218 5.54	6.00	SST	C N
6.25	158.750	4099-B	5.38 136.652	5.250 133.350	291.00 50.925	1.800 45.720	529.000 2352.992	1.810 45.97	0.500 12.70	3.63	OT	CG N
6.25	158.750	4095	12.00 304.800	4.750 120.650	547.00 95.725	2.700 68.580	1500.000 6672.000	5.250 133.35	0.750 19.05	7.00	HD	CG N
6.5	165.100	4089	5.00 127.000	4.500 114.300	4320.00 756.000	0.800 20.320	3460.000 15390.080	4.000 101.60	1.000 25.40	4.00	HD	CG N
6.5	165.100	4098	8.00 203.200	4.500 114.300	2033.00 355.775	1.600 40.640	3360.000 14945.280	6.250 158.75	1.000 25.40	6.25	HD	CG N
6.5	165.100	4092	10.00 254.000	5.376 136.550	211.00 36.925	3.000 76.200	632.000 2811.136	2.950 74.93	0.562 14.27	5.25	HD	CG N
7.25	184.150	4024-B	13.00 330.200	5.500 139.700	591.00 103.425	3.500 88.900	2060.000 9162.880	6.560 166.62	0.875 22.23	7.50	SPR	CG N
7.25	184.150	4099	29.00 736.600	6.126 155.600	34.00 5.950	17.000 431.800	569.000 2530.912	8.990 228.35	0.562 14.27	16.00	HD	CG N
7.5	190.500	4022-C	6.50 165.100	6.000 152.400	370.00 64.750	2.000 50.800	739.000 3287.072	4.500 114.30	0.750 19.05	6.00	HD	CG N
7.75	196.850	4044	10.00 254.000	6.938 176.225	39.00 6.825	5.600 142.240	219.000 974.112</					



Metric Compression Springs


Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate		Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches		Total Coils Mat'l	Ends E F n sh
				N/mm	Lbs./In.				mm	Inches		
1.20 0.047	75777	2.00 0.079	0.80 0.031	4.53	25.870	0.66 0.026	2.97 0.667	1.30 0.051	0.20 0.008	5.5	MW C N	
1.20 0.047	75778	2.70 0.106	0.80 0.031	2.88	16.450	1.00 0.039	2.88 0.647	1.70 0.067	0.20 0.008	7.5	MW C N	
1.20 0.047	75779	3.90 0.154	0.80 0.031	1.87	10.680	1.59 0.062	2.97 0.667	2.30 0.091	0.20 0.008	10.5	MW C N	
1.20 0.047	75780	5.50 0.217	0.80 0.031	1.27	7.250	2.34 0.092	2.97 0.667	3.10 0.122	0.20 0.008	14.5	MW C N	
1.20 0.047	75781	7.80 0.307	0.80 0.031	0.86	4.910	3.45 0.136	2.97 0.667	4.30 0.169	0.20 0.008	20.5	MW C N	
1.40 0.055	75000	3.50 0.140	1.00 0.039	1.61	9.230	1.60 0.063	2.58 0.581	1.91 0.075	0.20 0.008	8.4	MW C N	
1.40 0.055	75001	5.00 0.200	1.00 0.039	1.06	6.070	2.41 0.095	2.56 0.577	2.59 0.102	0.20 0.008	11.7	MW C N	
1.40 0.055	75002	7.50 0.300	1.00 0.039	0.68	3.870	3.79 0.149	2.56 0.577	3.71 0.146	0.20 0.008	17.3	MW C N	
1.40 0.055	75003	10.00 0.390	1.00 0.039	0.50	2.840	5.16 0.203	2.56 0.576	4.85 0.191	0.20 0.008	22.9	MW C N	
1.40 0.055	75004	12.50 0.490	1.00 0.039	0.39	2.240	6.53 0.257	2.56 0.576	5.97 0.235	0.20 0.008	28.4	MW C N	
1.40 0.055	75005	15.00 0.590	1.00 0.039	0.32	1.850	7.93 0.312	2.57 0.578	7.09 0.279	0.20 0.008	33.9	MW C N	
1.40 0.055	75006	17.50 0.690	1.00 0.039	0.28	1.580	9.27 0.365	2.56 0.576	8.23 0.324	0.20 0.008	39.5	MW C N	
1.40 0.055	75024	2.30 0.090	1.00 0.039	2.84	16.200	0.91 0.036	2.59 0.583	1.30 0.051	0.20 0.008	5.5	MW C N	
1.40 0.055	75025	3.20 0.130	1.00 0.039	1.80	10.310	1.42 0.056	2.56 0.577	1.70 0.067	0.20 0.008	7.5	MW C N	
1.40 0.055	75026	4.60 0.180	1.00 0.039	1.17	6.670	2.21 0.087	2.58 0.580	2.30 0.091	0.20 0.008	10.5	MW C N	
1.40 0.055	75027	6.50 0.260	1.00 0.039	0.79	4.540	3.25 0.128	2.58 0.581	3.10 0.122	0.20 0.008	14.5	MW C N	
1.40 0.055	75028	9.30 0.370	1.00 0.039	0.54	3.070	4.83 0.190	2.59 0.583	4.30 0.169	0.20 0.008	20.5	MW C N	
1.40 0.055	75034	3.50 0.140	0.90 0.035	4.56	26.040	1.04 0.041	4.75 1.068	2.36 0.093	0.25 0.010	8.3	MW C N	
1.40 0.055	75035	5.00 0.200	0.90 0.035	2.94	16.820	1.63 0.064	4.79 1.077	3.25 0.128	0.25 0.010	11.8	MW C N	
1.40 0.055	75036	7.50 0.300	0.90 0.035	1.85	10.580	2.57 0.101	4.75 1.069	4.72 0.186	0.25 0.010	17.6	MW C N	
1.40 0.055	75037	10.00 0.390	0.90 0.035	1.35	7.720	3.53 0.139	4.77 1.073	6.17 0.243	0.25 0.010	23.3	MW C N	
1.40 0.055	75038	12.50 0.490	0.90 0.035	1.06	6.070	4.50 0.177	4.78 1.075	7.65 0.301	0.25 0.010	29.1	MW C N	
1.40 0.055	75039	15.00 0.590	0.90 0.035	0.88	5.010	5.44 0.214	4.76 1.071	9.12 0.359	0.25 0.010	34.9	MW C N	
1.40 0.055	75040	17.50 0.690	0.90 0.035	0.75	4.260	6.40 0.252	4.77 1.073	10.57 0.416	0.25 0.010	40.7	MW C N	
1.40 0.055	75105	3.50 0.140	0.80 0.031	11.63	66.460	0.66 0.026	7.68 1.728	2.72 0.107	0.30 0.012	7.9	MW C N	
1.40 0.055	75106	5.00 0.200	0.80 0.031	7.36	42.060	1.07 0.042	7.85 1.767	3.76 0.148	0.30 0.012	11.3	MW C N	
1.40 0.055	75107	7.50 0.300	0.80 0.031	4.57	26.090	1.70 0.067	7.77 1.748	5.49 0.216	0.30 0.012	17	MW C N	
1.40 0.055	75108	10.00 0.390	0.80 0.031	3.31	18.910	2.34 0.092	7.73 1.740	7.21 0.284	0.30 0.012	22.7	MW C N	
1.40 0.055	75109	12.50 0.490	0.80 0.031	2.60	14.830	3.00 0.118	7.78 1.750	8.94 0.352	0.30 0.012	28.4	MW C N	
1.40 0.055	75110	15.00 0.590	0.80 0.031	2.14	12.200	3.63 0.143	7.76 1.745	10.69 0.421	0.30 0.012	34.1	MW C N	
1.40 0.055	75111	17.50 0.690	0.80 0.031	1.81	10.360	4.29 0.169	7.78 1.751	12.42 0.489	0.30 0.012	39.8	MW C N	
1.40 0.055	75000S	3.50 0.138	1.00 0.039	1.35	7.684	1.22 0.048	1.64 0.369	1.91 0.075	0.20 0.008	8.4	SST C N	
1.40 0.055	75001S	5.00 0.197	1.00 0.039	0.89	5.059	1.85 0.073	1.64 0.369	2.59 0.102	0.20 0.008	11.8	SST C N	
1.40 0.055	75002S	7.50 0.295	1.00 0.039	0.57	3.224	2.90 0.114	1.64 0.368	3.71 0.146	0.20 0.008	17.3	SST C N	
1.40 0.055	75003S	10.00 0.394	1.00 0.039	0.41	2.365	3.96 0.156	1.64 0.369	4.85 0.191	0.20 0.008	22.9	SST C N	
1.40 0.055	75004S	12.50 0.492	1.00 0.039	0.33	1.868	5.03 0.198	1.64 0.370	5.97 0.235	0.20 0.008	28.4	SST C N	
1.40 0.055	75005S	15.00 0.591	1.00 0.039	0.27	1.544	6.07 0.239	1.64 0.369	7.09 0.279	0.20 0.008	34	SST C N	
1.40 0.055	75006S	17.50 0.689	1.00 0.039	0.23	1.314	7.14 0.281	1.64 0.369	8.23 0.324	0.20 0.008	39.5	SST C N	
1.40 0.055	75024S	2.30 0.091	1.00 0.039	2.28	13.020	0.71 0.028	1.62 0.365	1.30 0.051	0.20 0.008	5.5	SST C N	
1.40 0.055	75025S	3.20 0.126	1.00 0.039	1.51	8.624	1.09 0.043	1.65 0.371	1.70 0.067	0.20 0.008	7.5	SST C N	
1.40 0.055	75026S	4.60 0.181	1.00 0.039	0.97	5.544	1.70 0.067	1.65 0.371	2.30 0.091	0.20 0.008	10.5	SST C N	
1.40 0.055	75027S	6.50 0.256	1.00 0.039	0.67	3.808	2.46 0.097	1.64 0.369	3.10 0.122	0.20 0.008	14.5	SST C N	
1.40 0.055	75028S	9.30 0.366	1.00 0.039	0.45	2.576	3.63 0.143	1.64 0.368	4.30 0.169	0.20 0.008	20.5	SST C N	
1.40 0.055	75034S	3.50 0.138	0.90 0.035	3.80	21.689	0.81 0.032	3.08 0.694	2.36 0.093	0.25 0.010	8.3	SST C N	
1.40 0.055	75035S	5.00 0.197	0.90 0.035	2.45	14.012	1.25 0.049	3.05 0.687	3.25 0.128	0.25 0.010	11.8	SST C N	
1.40 0.055	75036S	7.50 0.295	0.90 0.035	1.54	8.813	1.98 0.078	3.05 0.687	4.72 0.186	0.25 0.010	17.6	SST C N	
1.40 0.055	75037S	10.00 0.394	0.90 0.035	1.13	6.428	2.72 0.107	3.06 0.688	6.17 0.243	0.25 0.010	23.3	SST C N	
1.40 0.055	75038S	12.50 0.492	0.90 0.035	0.89	5.059	3.45 0.136	3.06 0.688	7.65 0.301	0.25 0.010	29.1	SST C N	
1.40 0.055	75039S	15.00 0.591	0.90 0.035	0.73	4.171	4.19 0.165	3.06 0.688	9.12 0.359	0.25 0.010	34.9	SST C N	
1.40 0.055	75040S	17.50 0.689	0.90 0.035	0.62	3.548	4.93 0.194	3.06 0.688	10.57 0.416	0.25 0.010	40.7	SST C N	
1.40 0.055	75105S	3.50 0.138	0.80 0.031	9.70	55.365	0.53 0.021	5.17 1.163	2.72 0.107	0.30 0.012	7.9	SST C N	
1.40 0.055	75106S	5.00 0.197	0.80 0.031	6.14	35.038	0.84 0.033	5.14 1.156	3.76 0.148	0.30 0.012	11.3	SST C N	
1.40 0.055	75107S	7.50 0.295	0.80 0.031	3.81	21.736	1.32 0.052	5.02 1.130	5.49 0.216	0.30 0.012	17	SST C N	
1.40 0.055	75108S	10.00 0.394	0.80 0.031	2.76	15.755	1.83 0.072	5.04 1.134	7.21 0.284	0.30 0.012	22.7	SST C N	
1.40 0.055	75109S	12.50 0.492	0.80 0.031	2.16	12.356	2.34 0.092	5.05 1.137	8.94 0.352	0.30 0.012	28.4	SST C N	
1.40 0.055	75110S	15.00 0.591	0.80 0.031	1.78	10.163	2.85 0.112	5.06 1.138	10.69 0.421	0.30 0.012	34.1	SST C N	
1.40 0.055	75111S	17.50 0.689	0.80 0.031	1.51	8.631	3.35 0.132	5.06 1.139	12.42 0.489	0.30 0.012	39.8	SST C N	
1.45 0.057	75095S	2.40 0.090	0.95 0.037	6.92	39.560	0.66 0.026	4.57 1.029	1.63 0.064	0.25 0.010	5.5	MW C N	
1.45 0.057	75096S	3.30 0.130	0.95 0.037	4.41	25.170	1.04 0.041	4.59 1.032	2.13 0.084	0.25 0.010	7.5	MW C N	
1.45 0.057	75097S	4.70 0.190	0.95 0.037	2.85	16.290	1.63 0.064	4.63 1.042	2.87 0.113	0.25 0.010	10.5	MW C N	
1.45 0.057	75098S	6.60 0.260	0.95 0.037	1.94	11.080	2.39 0.094	4.63 1.041	3.89 0.153	0.25 0.010	14.5	MW C N	
1.45 0.057	75099S	9.40 0.370	0.95 0.037	1.31	7.480	3.53 0.139	4.62 1.040	5.38 0.212	0.25 0.010	20.5	MW C N	
1.45 0.057	75095S	2.40 0.094	0.95 0.037	5.57	31.785	0.53 0.021	2.96 0.667	1.63 0.064	0.25 0.010	5.5	SST C N	
1.45 0.057	75096S	3.30 0.130	0.95 0.037	3.54	20.227	0.84 0.033	2.96 0.667	2.13 0.084	0.25 0.010	7.5	SST C N	
1.45 0.057	75097S	4.70 0.185	0.95 0.037	2.29	13.088	1.30 0.051	2.96 0.667	2.87 0.113	0.25 0.010	10.5	SST C N	

MATERIAL MW Music Wire
SST Stainless Steel


ENDS C Closed
CG Closed & Ground

FINISH N None




Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils Mat'l	Ends C	Finish N Zinc									
1.45	0.057	75098S	6.60	0.260	0.95	0.037	1.56	8.900	1.91	0.075	2.97	0.668	3.89	0.153	0.25	0.010	14.5	SST	C	N
1.45	0.057	75099S	9.40	0.370	0.95	0.037	1.05	6.013	2.82	0.111	2.96	0.667	5.38	0.212	0.25	0.010	20.5	SST	C	N
1.52	0.060	75782	5.00	0.197	1.12	0.044	0.70	4.000	2.38	0.094	1.67	0.375	2.62	0.103	0.20	0.008	12.1	MW	C	N
1.52	0.060	75783	10.00	0.394	1.12	0.044	0.33	1.880	5.16	0.203	1.70	0.383	4.84	0.191	0.20	0.008	23.2	MW	C	N
1.52	0.060	75784	15.00	0.591	1.12	0.044	0.22	1.260	7.94	0.313	1.75	0.393	7.06	0.278	0.20	0.008	34.3	MW	C	N
1.80	0.071	75029	3.00	0.120	1.40	0.055	1.18	6.730	1.70	0.067	2.00	0.451	1.30	0.051	0.20	0.008	5.5	MW	C	N
1.80	0.071	75030	4.40	0.170	1.40	0.055	0.75	4.280	2.69	0.106	2.02	0.454	1.70	0.067	0.20	0.008	7.5	MW	C	N
1.80	0.071	75031	6.40	0.250	1.40	0.055	0.49	2.770	4.09	0.161	1.98	0.446	2.30	0.091	0.20	0.008	10.5	MW	C	N
1.80	0.071	75032	9.20	0.360	1.40	0.055	0.33	1.880	6.10	0.240	2.01	0.452	3.10	0.122	0.20	0.008	14.5	MW	C	N
1.80	0.071	75033	13.30	0.520	1.40	0.055	0.22	1.270	9.02	0.355	2.01	0.452	4.30	0.169	0.20	0.008	20.5	MW	C	N
1.80	0.071	75029S	3.00	0.118	1.40	0.055	0.96	5.492	1.35	0.053	1.29	0.291	1.30	0.051	0.20	0.008	5.5	SST	C	N
1.80	0.071	75030S	4.40	0.173	1.40	0.055	0.61	3.495	2.13	0.084	1.31	0.294	1.70	0.067	0.20	0.008	7.5	SST	C	N
1.80	0.071	75031S	6.40	0.252	1.40	0.055	0.40	2.262	3.28	0.129	1.30	0.292	2.30	0.091	0.20	0.008	10.5	SST	C	N
1.80	0.071	75032S	9.20	0.362	1.40	0.055	0.27	1.538	4.83	0.190	1.30	0.292	3.10	0.122	0.20	0.008	14.5	SST	C	N
1.80	0.071	75033S	13.30	0.524	1.40	0.055	0.18	1.039	7.14	0.281	1.30	0.292	4.30	0.169	0.20	0.008	20.5	SST	C	N
1.85	0.073	75100	3.00	0.120	1.35	0.053	2.87	16.430	1.30	0.051	3.72	0.838	1.63	0.064	0.25	0.010	5.5	MW	C	N
1.85	0.073	75101	4.30	0.170	1.35	0.053	1.83	10.450	2.03	0.080	3.72	0.836	2.13	0.084	0.25	0.010	7.5	MW	C	N
1.85	0.073	75102	6.20	0.240	1.35	0.053	1.18	6.760	3.15	0.124	3.73	0.839	2.87	0.113	0.25	0.010	10.5	MW	C	N
1.85	0.073	75103	8.70	0.340	1.35	0.053	0.81	4.600	4.62	0.182	3.72	0.837	3.89	0.153	0.25	0.010	14.5	MW	C	N
1.85	0.073	75104	12.50	0.490	1.35	0.053	0.54	3.110	6.83	0.269	3.72	0.836	5.38	0.212	0.25	0.010	20.5	MW	C	N
1.85	0.073	75100S	3.00	0.118	1.35	0.053	2.35	13.409	1.02	0.040	2.38	0.536	1.63	0.064	0.25	0.010	5.5	SST	C	N
1.85	0.073	75101S	4.30	0.169	1.35	0.053	1.49	8.533	1.60	0.063	2.39	0.538	2.13	0.084	0.25	0.010	7.5	SST	C	N
1.85	0.073	75102S	6.20	0.244	1.35	0.053	0.97	5.522	2.46	0.097	2.38	0.536	2.87	0.113	0.25	0.010	10.5	SST	C	N
1.85	0.073	75103S	8.70	0.343	1.35	0.053	0.66	3.755	3.63	0.143	2.39	0.537	3.89	0.153	0.25	0.010	14.5	SST	C	N
1.85	0.073	75104S	12.50	0.492	1.35	0.053	0.44	2.537	5.39	0.212	2.39	0.538	5.38	0.212	0.25	0.010	20.5	SST	C	N
1.92	0.076	75159	3.10	0.120	1.28	0.050	8.21	46.910	0.86	0.034	7.09	1.595	2.08	0.082	0.32	0.013	5.5	MW	C	N
1.92	0.076	75160	4.40	0.170	1.28	0.050	5.22	29.850	1.35	0.053	7.03	1.582	2.72	0.107	0.32	0.013	7.5	MW	C	N
1.92	0.076	75161	6.30	0.250	1.28	0.050	3.38	19.320	2.08	0.082	7.04	1.584	3.68	0.145	0.32	0.013	10.5	MW	C	N
1.92	0.076	75162	8.70	0.340	1.28	0.050	2.30	13.140	3.07	0.121	7.06	1.589	4.96	0.195	0.32	0.013	14.5	MW	C	N
1.92	0.076	75163	12.50	0.490	1.28	0.050	1.55	8.880	4.52	0.178	7.02	1.580	6.88	0.271	0.32	0.013	20.5	MW	C	N
1.92	0.076	75159S	3.10	0.122	1.28	0.050	6.30	35.996	0.74	0.029	4.64	1.044	2.08	0.082	0.32	0.013	5.5	SST	C	N
1.92	0.076	75160S	4.40	0.173	1.28	0.050	4.01	22.906	1.14	0.045	4.58	1.031	2.72	0.107	0.32	0.013	7.5	SST	C	N
1.92	0.076	75161S	6.30	0.248	1.28	0.050	2.60	14.822	1.78	0.070	4.61	1.038	3.68	0.145	0.32	0.013	10.5	SST	C	N
1.92	0.076	75162S	8.70	0.343	1.28	0.050	1.77	10.079	2.62	0.103	4.61	1.038	4.96	0.195	0.32	0.013	14.5	SST	C	N
1.92	0.076	75163S	12.50	0.492	1.28	0.050	1.19	6.810	3.86	0.152	4.60	1.035	6.88	0.271	0.32	0.013	20.5	SST	C	N
1.92	0.076	75785	3.10	0.122	1.28	0.050	7.25	41.400	0.98	0.039	7.11	1.597	2.08	0.082	0.32	0.013	5.5	MW	C	N
1.92	0.076	75786	4.40	0.173	1.28	0.050	4.61	26.320	1.54	0.061	7.10	1.597	2.72	0.107	0.32	0.013	7.5	MW	C	N
1.92	0.076	75787	6.30	0.248	1.28	0.050	2.99	17.070	2.38	0.094	7.10	1.596	3.68	0.145	0.32	0.013	10.5	MW	C	N
1.92	0.076	75788	8.70	0.343	1.28	0.050	2.03	11.590	3.50	0.138	7.10	1.597	4.96	0.195	0.32	0.013	14.5	MW	C	N
1.92	0.076	75789	13.00	0.512	1.28	0.050	1.37	7.820	5.18	0.204	7.10	1.597	6.88	0.271	0.32	0.013	20.5	MW	C	N
2.00	0.079	75007	3.50	0.140	1.60	0.063	0.80	4.560	2.13	0.084	1.70	0.383	1.37	0.054	0.20	0.008	5.8	MW	C	N
2.00	0.079	75008	5.00	0.200	1.60	0.063	0.53	3.000	3.23	0.127	1.69	0.381	1.78	0.070	0.20	0.008	7.7	MW	C	N
2.00	0.079	75009	7.50	0.300	1.60	0.063	0.34	1.910	5.06	0.199	1.69	0.380	2.44	0.096	0.20	0.008	11	MW	C	N
2.00	0.079	75010	10.00	0.390	1.60	0.063	0.25	1.400	6.91	0.272	1.70	0.382	3.10	0.122	0.20	0.008	14.2	MW	C	N
2.00	0.079	75011	12.50	0.490	1.60	0.063	0.19	1.110	8.74	0.344	1.69	0.381	3.76	0.148	0.20	0.008	17.5	MW	C	N
2.00	0.079	75012	15.00	0.590	1.60	0.063	0.16	0.920	10.59	0.417	1.70	0.382	4.42	0.174	0.20	0.008	20.8	MW	C	N
2.00	0.079	75013	17.50	0.690	1.60	0.063	0.14	0.780	12.42	0.489	1.69	0.381	5.08	0.200	0.20	0.008	24	MW	C	N
2.00	0.079	75041	3.50	0.140	1.50	0.059	0.97	11.260	1.70	0.067	3.35	0.754	1.80	0.071	0.25	0.010	6.1	MW	C	N
2.00	0.079	75042	5.00	0.200	1.50	0.059	0.59	2.720	2.64	0.104	3.36	0.756	2.36	0.093	0.25	0.010	8.3	MW	C	N
2.00	0.079	75043	7.50	0.300	1.50	0.059	0.80	4.570	4.19	0.165	3.36	0.755	3.30	0.130	0.25	0.010	12	MW	C	N
2.00	0.079	75044	10.00	0.390	1.50	0.059	0.58	3.340	5.77	0.227	3.36	0.757	4.24	0.167	0.25	0.010	15.7	MW	C	N
2.00	0.079	75045	12.50	0.490	1.50	0.059	0.46	2.630	7.32	0.288	3.36	0.756	5.18	0.204	0.25	0.010	19.4	MW	C	N
2.00	0.079	75046	15.00	0.590	1.50	0.059	0.38	2.160	8.89	0.350	3.36	0.757	6.12	0.241	0.25	0.010	23.1	MW	C	N
2.00	0.079	75047	17.50	0.690	1.50	0.059	0.32	1.840	10.44	0.411	3.36	0.757	7.06	0.278	0.25	0.010	26.8	MW	C	N
2.00	0.079	75048	20.00	0.790	1.50	0.059	0.28	1.600	11.99	0.472	3.36	0.756	8.00	0.315	0.25	0.010	30.5	MW	C	N
2.00	0.079	75112	3.50	0.140	1.40	0.05														



Metric Compression Springs


O.D. mm	Century Stock Number	Free Length mm	Free Length Inches	I.D. mm	I.D. Inches	Rate N/mm	Rate Lbs./In.	Sugg Max. Defl. mm	Sugg Max. Defl. Inches	Sugg Max. load N	Sugg Max. load Lbs.	Solid Length mm	Solid Length Inches	Wire Dia. mm	Wire Dia. Inches	Total Coils Mat'l	Ends C	Finish N	
2.00	0.079	75046S	15.00	0.591	1.50	0.059	0.32	1.803	7.04	0.277	2.22	0.499	6.12	0.241	0.25	0.010	23.1	SST	C N
2.00	0.079	75047S	17.50	0.689	1.50	0.059	0.27	1.534	8.28	0.326	2.22	0.500	7.06	0.278	0.25	0.010	26.8	SST	C N
2.00	0.079	75048S	20.00	0.787	1.50	0.059	0.23	1.334	9.53	0.375	2.22	0.500	8.00	0.315	0.25	0.010	30.5	SST	C N
2.00	0.079	75112S	3.50	0.138	1.40	0.055	3.68	21.032	1.02	0.040	3.74	0.841	2.16	0.085	0.30	0.012	6.1	SST	C N
2.00	0.079	75113S	5.00	0.197	1.40	0.055	2.33	13.311	1.60	0.063	3.73	0.839	2.90	0.114	0.30	0.012	8.5	SST	C N
2.00	0.079	75114S	7.50	0.295	1.40	0.055	1.45	8.258	2.59	0.102	3.74	0.842	4.09	0.161	0.30	0.012	12.4	SST	C N
2.00	0.079	75115S	10.00	0.394	1.40	0.055	1.05	5.985	3.56	0.140	3.72	0.838	5.31	0.209	0.30	0.012	16.4	SST	C N
2.00	0.079	75116S	12.50	0.492	1.40	0.055	0.82	4.694	4.55	0.179	3.73	0.840	6.50	0.256	0.30	0.012	20.4	SST	C N
2.00	0.079	75117S	15.00	0.591	1.40	0.055	0.68	3.860	5.51	0.217	3.72	0.838	7.72	0.304	0.30	0.012	24.3	SST	C N
2.00	0.079	75118S	17.50	0.689	1.40	0.055	0.57	3.279	6.50	0.256	3.73	0.839	8.92	0.351	0.30	0.012	28.3	SST	C N
2.00	0.079	75119S	20.00	0.787	1.40	0.055	0.50	2.849	7.47	0.294	3.72	0.838	10.13	0.399	0.30	0.012	32.3	SST	C N
2.02	0.080	75790	5.00	0.197	1.62	0.064	0.43	2.460	3.12	0.123	1.34	0.302	1.88	0.074	0.20	0.008	8.4	MW	C N
2.02	0.080	75791	10.00	0.394	1.62	0.064	0.20	1.140	6.70	0.264	1.34	0.301	3.30	0.130	0.20	0.008	15.5	MW	C N
2.02	0.080	75792	15.00	0.591	1.62	0.064	0.13	0.740	10.28	0.405	1.34	0.300	4.72	0.186	0.20	0.008	22.6	MW	C N
2.02	0.080	75793	20.00	0.787	1.62	0.064	0.09	0.510	13.84	0.545	1.25	0.280	6.16	0.243	0.20	0.008	29.8	MW	C N
2.02	0.080	75794	20.00	0.787	1.62	0.064	0.10	0.570	13.84	0.545	1.38	0.311	6.16	0.243	0.20	0.008	29.8	MW	C N
2.02	0.080	75795	25.00	0.984	1.62	0.064	0.08	0.460	17.40	0.685	1.39	0.313	7.60	0.299	0.20	0.008	37	MW	C N
2.12	0.083	75796	10.00	0.394	1.62	0.064	0.42	2.400	5.62	0.221	2.36	0.531	4.38	0.172	0.25	0.010	16.5	MW	C N
2.12	0.083	75797	20.00	0.787	1.62	0.064	0.20	1.140	11.77	0.463	2.35	0.529	8.23	0.324	0.25	0.010	31.9	MW	C N
2.12	0.083	75798	25.00	0.984	1.62	0.064	0.16	0.910	14.87	0.585	2.38	0.535	10.13	0.399	0.25	0.010	39.5	MW	C N
2.12	0.083	75799	30.00	1.181	1.62	0.064	0.14	0.800	18.00	0.709	2.52	0.567	12.00	0.472	0.25	0.010	47	MW	C N
2.20	0.087	75014	4.00	0.160	1.80	0.071	0.60	3.410	2.69	0.106	1.61	0.362	1.30	0.051	0.20	0.008	5.5	MW	C N
2.20	0.087	75015	5.90	0.230	1.80	0.071	0.38	2.170	4.19	0.165	1.59	0.358	1.70	0.067	0.20	0.008	7.5	MW	C N
2.20	0.087	75016	8.70	0.340	1.80	0.071	0.25	1.410	6.40	0.252	1.57	0.354	2.30	0.091	0.20	0.008	10.5	MW	C N
2.20	0.087	75017	12.60	0.500	1.80	0.071	0.17	0.960	9.50	0.374	1.59	0.357	3.10	0.122	0.20	0.008	14.5	MW	C N
2.20	0.087	75018	18.30	0.720	1.80	0.071	0.11	0.650	14.00	0.551	1.58	0.356	4.30	0.169	0.20	0.008	20.5	MW	C N
2.20	0.087	75014S	4.00	0.157	1.80	0.071	0.49	2.812	2.18	0.086	1.08	0.242	1.30	0.051	0.20	0.008	5.5	SST	C N
2.20	0.087	75015S	5.90	0.232	1.80	0.071	0.31	1.790	3.43	0.135	1.08	0.242	1.70	0.067	0.20	0.008	7.5	SST	C N
2.20	0.087	75016S	8.70	0.343	1.80	0.071	0.20	1.158	5.28	0.208	1.07	0.241	2.30	0.091	0.20	0.008	10.5	SST	C N
2.20	0.087	75017S	12.60	0.496	1.80	0.071	0.14	0.787	7.77	0.306	1.07	0.241	3.10	0.122	0.20	0.008	14.5	SST	C N
2.20	0.087	75018S	18.30	0.720	1.80	0.071	0.09	0.532	11.51	0.453	1.07	0.241	4.30	0.169	0.20	0.008	20.5	SST	C N
2.20	0.087	75800	4.10	0.161	1.80	0.071	0.68	3.880	2.50	0.098	1.70	0.382	1.20	0.047	0.20	0.008	5	MW	C N
2.25	0.089	75049	3.50	0.140	1.75	0.069	1.75	10.000	1.78	0.070	3.11	0.700	1.60	0.063	0.25	0.010	5	MW	C N
2.25	0.089	75050	5.00	0.200	1.75	0.069	1.12	6.400	2.77	0.109	3.10	0.698	2.01	0.079	0.25	0.010	6.8	MW	C N
2.25	0.089	75051	6.50	0.260	1.75	0.069	0.84	4.800	3.68	0.145	3.09	0.696	2.39	0.094	0.25	0.010	8.3	MW	C N
2.25	0.089	75052	8.00	0.320	1.75	0.069	0.67	3.800	4.65	0.183	3.09	0.695	2.79	0.110	0.25	0.010	10	MW	C N
2.25	0.089	75053	9.50	0.370	1.75	0.069	0.54	3.100	5.72	0.225	3.10	0.698	3.20	0.126	0.25	0.010	11.8	MW	C N
2.25	0.089	75054	11.00	0.430	1.75	0.069	0.47	2.700	6.55	0.258	3.10	0.697	3.61	0.142	0.25	0.010	13.3	MW	C N
2.25	0.089	75055	12.50	0.490	1.75	0.069	0.40	2.300	7.70	0.303	3.10	0.697	3.99	0.157	0.25	0.010	15.2	MW	C N
2.25	0.089	75056	14.00	0.550	1.75	0.069	0.37	2.100	8.41	0.331	3.09	0.695	4.45	0.175	0.25	0.010	16.5	MW	C N
2.25	0.089	75057	15.50	0.610	1.75	0.069	0.33	1.900	9.30	0.366	3.09	0.695	4.85	0.191	0.25	0.010	18	MW	C N
2.25	0.089	75058	17.00	0.670	1.75	0.069	0.30	1.700	10.39	0.409	3.09	0.695	5.26	0.207	0.25	0.010	19.9	MW	C N
2.25	0.089	75059	19.00	0.750	1.75	0.069	0.26	1.500	11.79	0.464	3.09	0.696	5.84	0.230	0.25	0.010	22.3	MW	C N
2.25	0.089	75060	3.70	0.150	1.75	0.069	1.46	8.330	2.08	0.082	3.04	0.683	1.63	0.064	0.25	0.010	5.5	MW	C N
2.25	0.089	75061	5.50	0.220	1.75	0.069	0.93	5.300	3.33	0.131	3.08	0.694	2.13	0.084	0.25	0.010	7.5	MW	C N
2.25	0.089	75062	8.00	0.320	1.75	0.069	0.60	3.430	5.13	0.202	3.08	0.693	2.87	0.113	0.25	0.010	10.5	SST	C N
2.25	0.089	75063	11.40	0.450	1.75	0.069	0.41	2.330	7.52	0.296	3.07	0.690	3.89	0.153	0.25	0.010	14.5	MW	C N
2.25	0.089	75064	16.60	0.650	1.75	0.069	0.28	1.580	11.23	0.442	3.10	0.697	5.38	0.212	0.25	0.010	20.5	MW	C N
2.25	0.089	75049S	3.50	0.138	1.75	0.069	1.45	8.300	1.37	0.054	1.99	0.448	1.60	0.063	0.25	0.010	5.1	SST	C N
2.25	0.089	75050S	5.00	0.197	1.75	0.069	0.95	5.400	2.11	0.083	1.99	0.448	2.01	0.079	0.25	0.010	6.7	SST	C N
2.25	0.089	75051S	6.50	0.256	1.75	0.069	0.70	4.000	2.85	0.112	1.99	0.448	2.39	0.094	0.25	0.010	8.3	SST	C N
2.25	0.089	75052S	8.00	0.315	1.75	0.069	0.54	3.100	3.68	0.145	2.00	0.450	2.79	0.110	0.25	0.010	10.2	MW	C N
2.25	0.089	75053S	9.50	0.374	1.75	0.069	0.46	2.600	4.37	0.172	1.99	0.447	3.20	0.126	0.25	0.010	11.8	SST	C N
2.25	0.089	75054S	11.00	0.433	1.75	0.069	0.39	2.200	5.18	0.204	2.00	0.449	3.61	0.142	0.25	0.010	13.5	SST	C N
2.25	0.089	75055S	12.50	0.492	1.75	0.069	0.33	1.900	5.99	0.236	1.99	0.448	3.99	0.157	0.25	0.010	15.3	SST	C N
2.25	0.089	75056S	14.00	0.551	1.75	0.069	0.30	1.700	6.71	0.264	2.00	0.449	4.45	0.175	0.25	0.010	16.9	SST	



Century Spring


Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length		I.D.		Rate		Sugg. Max. Defl. mm Inches	Sugg. Max. load N Lbs.	Solid Length		Wire Dia.		Total Coils	Ends	F n s h		
		mm	Inches	mm	Inches	N/mm	Lbs./In.	mm	mm	Inches	mm	mm	Inches	Mat'l				
2.32	0.091	75802	5.30	0.209	1.68	0.066	2.36	13.480	2.54	0.100	6.00	1.349	2.72	0.107	0.32	0.013	7.5	MW C N
2.32	0.091	75803	7.70	0.303	1.68	0.066	1.53	8.740	3.92	0.154	6.00	1.349	3.68	0.145	0.32	0.013	10.5	MW C N
2.32	0.091	75804	11.00	0.433	1.68	0.066	1.10	6.280	5.45	0.215	6.00	1.349	4.80	0.189	0.32	0.013	14	MW C N
2.32	0.091	75805	16.00	0.630	1.68	0.066	0.74	4.230	8.11	0.319	6.00	1.349	6.72	0.265	0.32	0.013	20	MW C N
2.40	0.094	75164	3.50	0.140	1.60	0.062	9.45	53.990	0.91	0.036	8.64	1.944	2.60	0.102	0.40	0.016	5.5	MW C N
2.40	0.094	75165	5.00	0.200	1.60	0.062	6.01	34.360	1.60	0.063	9.62	2.165	3.40	0.134	0.40	0.016	7.5	MW C N
2.40	0.094	75166	7.00	0.280	1.60	0.062	3.89	22.230	2.41	0.095	9.39	2.112	4.60	0.181	0.40	0.016	10.5	MW C N
2.40	0.094	75167	10.00	0.390	1.60	0.062	2.65	15.120	3.81	0.150	10.08	2.268	6.20	0.244	0.40	0.016	14.5	MW C N
2.40	0.094	75168	14.00	0.550	1.60	0.062	1.79	10.220	5.39	0.212	9.63	2.166	8.60	0.339	0.40	0.016	20.5	MW C N
2.40	0.094	75164S	3.50	0.138	1.60	0.062	7.88	44.994	0.91	0.036	7.20	1.620	2.60	0.102	0.40	0.016	5.5	SST C N
2.40	0.094	75165S	5.00	0.197	1.60	0.062	5.02	28.633	1.42	0.056	7.12	1.603	3.40	0.134	0.40	0.016	7.5	SST C N
2.40	0.094	75166S	7.00	0.276	1.60	0.062	3.25	18.527	2.21	0.087	7.16	1.612	4.60	0.181	0.40	0.016	10.5	SST C N
2.40	0.094	75167S	10.00	0.394	1.60	0.062	2.21	12.598	3.25	0.128	7.17	1.613	6.20	0.244	0.40	0.016	14.5	SST C N
2.40	0.094	75168S	14.00	0.551	1.60	0.062	1.49	8.512	4.80	0.189	7.15	1.609	8.60	0.339	0.40	0.016	20.5	SST C N
2.40	0.094	75806	3.90	0.154	1.60	0.063	11.00	62.810	0.98	0.039	10.77	2.421	2.40	0.094	0.40	0.016	5	MW C N
2.40	0.094	75807	7.80	0.307	1.60	0.063	3.73	21.300	2.89	0.114	10.77	2.421	4.60	0.181	0.40	0.016	10.5	MW C N
2.40	0.094	75808	16.00	0.630	1.60	0.063	1.71	9.760	6.30	0.248	10.77	2.421	8.60	0.339	0.40	0.016	20.5	MW C N
2.50	0.098	75065	3.50	0.140	2.00	0.078	1.32	7.550	2.01	0.079	2.65	0.596	1.50	0.059	0.25	0.010	4.9	MW C N
2.50	0.098	75066	5.00	0.200	2.00	0.078	0.85	4.880	3.10	0.122	2.64	0.595	1.91	0.075	0.25	0.010	6.5	MW C N
2.50	0.098	75067	7.50	0.300	2.00	0.078	0.54	3.070	4.90	0.193	2.63	0.592	2.59	0.102	0.25	0.010	9.2	MW C N
2.50	0.098	75068	10.00	0.390	2.00	0.078	0.39	2.240	6.76	0.266	2.64	0.595	3.25	0.128	0.25	0.010	11.8	MW C N
2.50	0.098	75069	12.50	0.490	2.00	0.078	0.31	1.760	8.56	0.337	2.64	0.593	3.94	0.155	0.25	0.010	14.5	MW C N
2.50	0.098	75070	15.00	0.590	2.00	0.078	0.25	1.450	10.39	0.409	2.64	0.593	4.62	0.182	0.25	0.010	17.2	MW C N
2.50	0.098	75071	17.50	0.690	2.00	0.078	0.22	1.230	12.22	0.481	2.64	0.594	5.28	0.208	0.25	0.010	19.8	MW C N
2.50	0.098	75072	20.00	0.790	2.00	0.078	0.19	1.070	14.02	0.552	2.64	0.593	5.97	0.235	0.25	0.010	22.5	MW C N
2.50	0.098	75073	22.50	0.890	2.00	0.078	0.17	0.950	15.85	0.624	2.64	0.593	6.65	0.262	0.25	0.010	25.2	MW C N
2.50	0.098	75074	25.00	0.980	2.00	0.078	0.15	0.850	17.68	0.696	2.64	0.593	7.32	0.288	0.25	0.010	27.8	MW C N
2.50	0.098	75120	5.00	0.200	1.90	0.074	1.77	10.090	2.62	0.103	4.62	1.039	2.39	0.094	0.30	0.012	6.9	MW C N
2.50	0.098	75121	7.50	0.300	1.90	0.074	1.10	6.260	4.19	0.165	4.59	1.032	3.30	0.130	0.30	0.012	9.8	MW C N
2.50	0.098	75122	10.00	0.390	1.90	0.074	0.79	4.540	5.82	0.229	4.62	1.039	4.19	0.165	0.30	0.012	12.8	MW C N
2.50	0.098	75123	12.50	0.490	1.90	0.074	0.62	3.560	7.39	0.291	4.60	1.035	5.11	0.201	0.30	0.012	15.8	MW C N
2.50	0.098	75124	15.00	0.590	1.90	0.074	0.51	2.930	8.99	0.354	4.60	1.035	6.02	0.237	0.30	0.012	18.7	MW C N
2.50	0.098	75125	17.50	0.690	1.90	0.074	0.44	2.480	10.59	0.417	4.60	1.036	6.91	0.272	0.30	0.012	21.7	MW C N
2.50	0.098	75126	20.00	0.790	1.90	0.074	0.38	2.160	12.17	0.479	4.60	1.034	7.82	0.308	0.30	0.012	24.7	MW C N
2.50	0.098	75127	22.50	0.890	1.90	0.074	0.33	1.910	13.79	0.543	4.61	1.037	8.71	0.343	0.30	0.012	27.6	MW C N
2.50	0.098	75128	25.00	0.980	1.90	0.074	0.30	1.710	15.37	0.605	4.60	1.035	9.63	0.379	0.30	0.012	30.6	MW C N
2.50	0.098	75065S	3.50	0.138	2.00	0.078	1.10	6.287	1.65	0.065	1.82	0.409	1.50	0.059	0.25	0.010	4.9	SST C N
2.50	0.098	75066S	5.00	0.197	2.00	0.078	0.71	4.062	2.57	0.101	1.82	0.410	1.91	0.075	0.25	0.010	6.5	SST C N
2.50	0.098	75067S	7.50	0.295	2.00	0.078	0.45	2.555	4.06	0.160	1.82	0.409	2.59	0.102	0.25	0.010	9.2	SST C N
2.50	0.098	75068S	10.00	0.394	2.00	0.078	0.33	1.863	5.59	0.220	1.82	0.410	3.25	0.128	0.25	0.010	11.8	SST C N
2.50	0.098	75069S	12.50	0.492	2.00	0.078	0.26	1.466	7.09	0.279	1.82	0.409	3.94	0.155	0.25	0.010	14.5	SST C N
2.50	0.098	75070S	15.00	0.591	2.00	0.078	0.21	1.209	8.59	0.338	1.82	0.409	4.62	0.182	0.25	0.010	17.2	SST C N
2.50	0.098	75071S	17.50	0.689	2.00	0.078	0.18	1.028	10.11	0.398	1.82	0.409	5.28	0.208	0.25	0.010	19.8	SST C N
2.50	0.098	75072S	20.00	0.787	2.00	0.078	0.16	0.895	11.61	0.457	1.82	0.409	5.97	0.235	0.25	0.010	22.5	SST C N
2.50	0.098	75073S	22.50	0.886	2.00	0.078	0.14	0.791	13.13	0.517	1.82	0.409	6.65	0.262	0.25	0.010	25.2	SST C N
2.50	0.098	75074S	25.00	0.984	2.00	0.078	0.12	0.710	14.63	0.576	1.82	0.409	7.32	0.288	0.25	0.010	27.9	SST C N
2.50	0.098	75120S	5.00	0.197	1.90	0.074	1.47	8.402	2.08	0.082	3.06	0.689	2.39	0.094	0.30	0.012	6.9	SST C N
2.50	0.098	75121S	7.50	0.295	1.90	0.074	0.91	5.212	3.35	0.132	3.06	0.688	3.30	0.130	0.30	0.012	9.8	SST C N
2.50	0.098	75122S	10.00	0.394	1.90	0.074	0.66	3.778	4.65	0.183	3.07	0.691	4.19	0.165	0.30	0.012	12.8	SST C N
2.50	0.098	75123S	12.50	0.492	1.90	0.074	0.52	2.963	5.92	0.233	3.07	0.690	5.11	0.201	0.30	0.012	15.8	SST C N
2.50	0.098	75124S	15.00	0.591	1.90	0.074	0.43	2.437	7.19	0.283	3.07	0.690	6.02	0.237	0.30	0.012	18.7	SST C N
2.50	0.098	75125S	17.50	0.689	1.90	0.074	0.36	2.069	8.46	0.333	3.06	0.689	6.91	0.272	0.30	0.012	21.7	SST C N
2.50	0.098	75126S	20.00	0.787	1.90	0.074	0.32	1.798	9.75	0.384	3.07	0.690	7.82	0.308	0.30	0.012	24.7	SST C N
2.50	0.098	75127S	22.50	0.886	1.90	0.074	0.28	1.590	11.02	0.434	3.07	0.690	8.71	0.343	0.30	0.012	27.6	SST C N
2.50	0.098	75128S	25.00	0.984	1.90	0.074	0.25	1.424	12.32	0.485	3.07	0.691	9.63	0.379	0.30	0.012	30.6	SST C N
2.52	0.099	75809	10.00	0.394	2.12	0.083	0.14	0.800	7.58	0.298	1.06	0.239	2.42	0.095	0.20	0.008	11.1	MW C N
2.52	0.099	75810	20.00															




Metric Compression Springs

O.D. mm	Century Stock Number	Free Length mm	Free Length Inches	I.D. mm	I.D. Inches	Rate N/mm	Rate Lbs./In.	Sugg Max. Defl. mm	Sugg Max. Defl. Inches	Sugg Max. load N	Sugg Max. load Lbs.	Solid Length mm	Solid Length Inches	Wire Dia. mm	Wire Dia. Inches	Total Coils	Mat'l	Ends	F n s h	
2.75	0.108	75077	10.90	0.430	2.25	0.088	0.31	1.800	8.03	0.316	2.52	0.568	2.87	0.113	0.25	0.010	10.5	MW	C	N
2.75	0.108	75078	15.70	0.620	2.25	0.088	0.21	1.220	11.81	0.465	2.52	0.568	3.89	0.153	0.25	0.010	14.5	MW	C	N
2.75	0.108	75079	22.90	0.900	2.25	0.088	0.15	0.830	17.53	0.690	2.53	0.570	5.38	0.212	0.25	0.010	20.5	MW	C	N
2.75	0.108	75075S	4.90	0.193	2.25	0.088	0.62	3.515	2.69	0.106	1.66	0.373	1.63	0.064	0.25	0.010	5.5	SST	C	N
2.75	0.108	75076S	7.30	0.287	2.25	0.088	0.39	2.237	4.24	0.167	1.66	0.374	2.13	0.084	0.25	0.010	7.5	SST	C	N
2.75	0.108	75077S	10.90	0.429	2.25	0.088	0.25	1.447	6.55	0.258	1.66	0.373	2.87	0.113	0.25	0.010	10.5	SST	C	N
2.75	0.108	75078S	15.70	0.618	2.25	0.088	0.17	0.984	9.63	0.379	1.66	0.373	3.89	0.153	0.25	0.010	14.5	SST	C	N
2.75	0.108	75079S	22.90	0.902	2.25	0.088	0.12	0.665	14.25	0.561	1.66	0.373	5.38	0.212	0.25	0.010	20.5	SST	C	N
2.82	0.111	75144	4.70	0.190	2.18	0.085	2.18	12.460	2.29	0.090	4.99	1.122	2.08	0.082	0.32	0.013	5.5	MW	C	N
2.82	0.111	75145	6.80	0.270	2.18	0.085	1.39	7.930	3.61	0.142	5.00	1.126	2.72	0.107	0.32	0.013	7.5	MW	C	N
2.82	0.111	75146	10.00	0.390	2.18	0.085	0.90	5.130	5.56	0.219	5.00	1.124	3.68	0.145	0.32	0.013	10.5	MW	C	N
2.82	0.111	75147	14.20	0.560	2.18	0.085	0.61	3.490	8.18	0.322	5.00	1.124	4.96	0.195	0.32	0.013	14.5	MW	C	N
2.82	0.111	75148	20.60	0.810	2.18	0.085	0.41	2.360	12.12	0.477	5.00	1.125	6.88	0.271	0.32	0.013	20.5	MW	C	N
2.82	0.111	75144S	4.70	0.185	2.18	0.085	1.65	9.436	1.98	0.078	3.27	0.736	2.08	0.082	0.32	0.013	5.5	SST	C	N
2.82	0.111	75145S	6.80	0.268	2.18	0.085	1.05	6.005	3.12	0.123	3.28	0.739	2.72	0.107	0.32	0.013	7.5	SST	C	N
2.82	0.111	75146S	10.00	0.394	2.18	0.085	0.68	3.885	4.83	0.190	3.28	0.738	3.68	0.145	0.32	0.013	10.5	SST	C	N
2.82	0.111	75147S	14.20	0.559	2.18	0.085	0.46	2.642	7.09	0.279	3.28	0.737	4.96	0.195	0.32	0.013	14.5	SST	C	N
2.82	0.111	75148S	20.60	0.811	2.18	0.085	0.31	1.785	10.49	0.413	3.28	0.737	6.88	0.271	0.32	0.013	20.5	SST	C	N
2.82	0.111	75817	4.70	0.185	2.18	0.086	1.90	10.850	2.62	0.103	4.98	1.119	2.08	0.082	0.32	0.013	5.5	MW	C	N
2.82	0.111	75818	6.80	0.268	2.18	0.086	1.21	6.910	4.08	0.161	4.94	1.110	2.72	0.107	0.32	0.013	7.5	MW	C	N
2.82	0.111	75819	10.00	0.394	2.18	0.086	0.78	4.450	6.32	0.249	4.93	1.108	3.68	0.145	0.32	0.013	10.5	MW	C	N
2.82	0.111	75820	14.00	0.551	2.18	0.086	0.53	3.030	9.04	0.356	4.79	1.077	4.96	0.195	0.32	0.013	14.5	MW	C	N
2.82	0.111	75821	21.00	0.827	2.18	0.086	0.36	2.060	13.92	0.548	5.01	1.127	6.88	0.271	0.32	0.013	20.5	MW	C	N
2.90	0.114	75169	4.30	0.170	2.10	0.082	4.84	27.650	1.70	0.067	8.23	1.852	2.60	0.102	0.40	0.016	5.5	MW	C	N
2.90	0.114	75170	6.30	0.250	2.10	0.082	3.08	17.590	2.90	0.114	8.91	2.005	3.40	0.134	0.40	0.016	7.5	MW	C	N
2.90	0.114	75171	9.10	0.360	2.10	0.082	1.99	11.380	4.50	0.177	8.96	2.015	4.60	0.181	0.40	0.016	10.5	MW	C	N
2.90	0.114	75172	13.00	0.510	2.10	0.082	1.36	7.740	6.71	0.264	9.08	2.043	6.20	0.244	0.40	0.016	14.5	MW	C	N
2.90	0.114	75173	18.50	0.730	2.10	0.082	0.92	5.230	9.88	0.389	9.04	2.034	8.60	0.339	0.40	0.016	20.5	MW	C	N
2.90	0.114	75169S	4.30	0.169	2.10	0.082	4.04	23.037	1.50	0.059	6.04	1.359	2.60	0.102	0.40	0.016	5.5	SST	C	N
2.90	0.114	75170S	6.30	0.248	2.10	0.082	2.57	14.660	2.34	0.092	6.00	1.349	3.40	0.134	0.40	0.016	7.5	SST	C	N
2.90	0.114	75171S	9.10	0.358	2.10	0.082	1.66	9.486	3.63	0.143	6.03	1.356	4.60	0.181	0.40	0.016	10.5	SST	C	N
2.90	0.114	75172S	13.00	0.512	2.10	0.082	1.13	6.450	5.33	0.210	6.02	1.355	6.20	0.244	0.40	0.016	14.5	SST	C	N
2.90	0.114	75173S	18.50	0.728	2.10	0.082	0.76	4.358	7.90	0.311	6.02	1.355	8.60	0.339	0.40	0.016	20.5	SST	C	N
2.90	0.114	75822	4.60	0.181	2.10	0.083	5.60	31.980	1.62	0.064	9.09	2.044	2.40	0.094	0.40	0.016	5	MW	C	N
3.00	0.118	75080	7.50	0.300	2.50	0.098	0.40	2.270	5.41	0.213	2.15	0.484	2.08	0.082	0.25	0.010	7.2	MW	C	N
3.00	0.118	75081	10.00	0.390	2.50	0.098	0.29	1.660	7.42	0.292	2.15	0.484	2.59	0.102	0.25	0.010	9.2	MW	C	N
3.00	0.118	75082	12.50	0.490	2.50	0.098	0.23	1.300	9.42	0.371	2.15	0.484	3.07	0.121	0.25	0.010	11.1	MW	C	N
3.00	0.118	75083	15.00	0.590	2.50	0.098	0.19	1.080	11.43	0.450	2.15	0.484	3.58	0.141	0.25	0.010	13.1	MW	C	N
3.00	0.118	75084	17.50	0.690	2.50	0.098	0.16	0.910	13.44	0.529	2.15	0.484	4.06	0.160	0.25	0.010	15	MW	C	N
3.00	0.118	75085	20.00	0.790	2.50	0.098	0.14	0.800	15.42	0.607	2.15	0.483	4.57	0.180	0.25	0.010	17	MW	C	N
3.00	0.118	75086	22.50	0.890	2.50	0.098	0.12	0.700	17.45	0.687	2.15	0.484	5.05	0.199	0.25	0.010	18.9	MW	C	N
3.00	0.118	75087	25.00	0.980	2.50	0.098	0.11	0.630	19.43	0.765	2.15	0.483	5.56	0.219	0.25	0.010	20.9	MW	C	N
3.00	0.118	75088	27.50	1.080	2.50	0.098	0.10	0.570	21.46	0.845	2.15	0.483	6.05	0.238	0.25	0.010	22.8	MW	C	N
3.00	0.118	75089	30.00	1.180	2.50	0.098	0.09	0.520	23.44	0.923	2.15	0.483	6.55	0.258	0.25	0.010	24.8	MW	C	N
3.00	0.118	75129	7.50	0.300	2.40	0.094	0.78	4.450	4.80	0.189	3.74	0.841	2.69	0.106	0.30	0.012	7.9	MW	C	N
3.00	0.118	75130	10.00	0.390	2.40	0.094	0.56	3.230	6.63	0.261	3.74	0.842	3.38	0.133	0.30	0.012	10.1	MW	C	N
3.00	0.118	75131	12.50	0.490	2.40	0.094	0.44	2.530	8.43	0.332	3.73	0.840	4.06	0.160	0.30	0.012	12.3	MW	C	N
3.00	0.118	75132	15.00	0.590	2.40	0.094	0.36	2.080	10.26	0.404	3.73	0.840	4.75	0.187	0.30	0.012	14.6	MW	C	N
3.00	0.118	75133	17.50	0.690	2.40	0.094	0.31	1.770	12.09	0.476	3.74	0.841	5.41	0.213	0.30	0.012	16.8	MW	C	N
3.00	0.118	75134	20.00	0.790	2.40	0.094	0.27	1.540	13.89	0.547	3.73	0.840	6.10	0.240	0.30	0.012	19	MW	C	N
3.00	0.118	75135	22.50	0.890	2.40	0.094	0.24	1.360	15.72	0.619	3.73	0.840	6.78	0.267	0.30	0.012	21.3	MW	C	N
3.00	0.118	75136	25.00	0.980	2.40	0.094	0.21	1.220	17.53	0.690	3.73	0.839	7.47	0.294	0.30	0.012	23.5	MW	C	N
3.00	0.118	75137	27.50	1.080	2.40	0.094	0.19	1.100	19.38	0.763	3.74	0.841	8.13	0.320	0.30	0.012	25.7	MW	C	N
3.00	0.118	75138	30.00	1.180	2.40	0.094	0.18	1.010	21.18	0.834	3.73	0.840	8.81	0.347	0.30	0.012	27.9	MW	C	N
3.00	0.118	75189	6.50	0.260	2.28	0.090	1.90	10.880	3.48	0.137	6.63	1.491	2.39	0.						




Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends Mat'l	Finish Z									
3.00	0.118	75234	19.00	0.750	1.98	0.078	2.29	13.080	7.54	0.297	17.27	3.885	10.03	0.395	0.51	0.020	20.2	MW	CG	Z
3.00	0.118	75235	25.00	0.980	1.98	0.078	1.72	9.810	10.03	0.395	17.22	3.875	13.03	0.513	0.51	0.020	26.3	MW	CG	Z
3.00	0.118	75236	27.50	1.080	1.98	0.078	1.55	8.880	11.10	0.437	17.25	3.881	14.30	0.563	0.51	0.020	28.8	MW	CG	Z
3.00	0.118	75237	30.00	1.180	1.98	0.078	1.42	8.120	12.14	0.478	17.25	3.881	15.54	0.612	0.51	0.020	31.3	MW	CG	Z
3.00	0.118	75238	40.00	1.580	1.98	0.078	1.06	6.040	16.31	0.642	17.24	3.878	20.55	0.809	0.51	0.020	41.4	MW	CG	Z
3.00	0.118	75239	4.40	0.170	2.00	0.078	11.81	67.490	1.37	0.054	16.20	3.645	2.75	0.108	0.50	0.020	5.5	MW	CG	Z
3.00	0.118	75240	6.10	0.240	2.00	0.078	7.52	42.950	2.16	0.085	16.23	3.651	3.75	0.148	0.50	0.020	7.5	MW	CG	Z
3.00	0.118	75241	8.70	0.340	2.00	0.078	4.86	27.790	3.35	0.132	16.30	3.668	5.25	0.207	0.50	0.020	10.5	MW	CG	Z
3.00	0.118	75242	12.00	0.470	2.00	0.078	3.31	18.900	4.75	0.187	15.71	3.534	7.25	0.285	0.50	0.020	14.5	MW	CG	Z
3.00	0.118	75243	17.50	0.690	2.00	0.078	2.24	12.770	7.24	0.285	16.17	3.639	10.25	0.404	0.50	0.020	20.5	MW	CG	Z
3.00	0.118	75080S	7.50	0.295	2.50	0.098	0.33	1.892	4.60	0.181	1.52	0.342	2.08	0.082	0.25	0.010	7.3	SST	C	N
3.00	0.118	75081S	10.00	0.394	2.50	0.098	0.24	1.380	6.33	0.249	1.53	0.344	2.59	0.102	0.25	0.010	9.2	SST	C	N
3.00	0.118	75082S	12.50	0.492	2.50	0.098	0.19	1.086	8.03	0.316	1.52	0.343	3.07	0.121	0.25	0.010	11.1	SST	C	N
3.00	0.118	75083S	15.00	0.591	2.50	0.098	0.16	0.895	9.73	0.383	1.52	0.343	3.58	0.141	0.25	0.010	13.1	SST	C	N
3.00	0.118	75084S	17.50	0.689	2.50	0.098	0.13	0.761	11.46	0.451	1.52	0.343	4.06	0.160	0.25	0.010	15	SST	C	N
3.00	0.118	75085S	20.00	0.787	2.50	0.098	0.12	0.662	13.16	0.518	1.52	0.343	4.57	0.180	0.25	0.010	17	SST	C	N
3.00	0.118	75086S	22.50	0.886	2.50	0.098	0.10	0.586	14.86	0.585	1.52	0.343	5.05	0.199	0.25	0.010	18.9	SST	C	N
3.00	0.118	75087S	25.00	0.984	2.50	0.098	0.09	0.526	16.56	0.652	1.52	0.343	5.56	0.219	0.25	0.010	20.9	SST	C	N
3.00	0.118	75088S	27.50	1.083	2.50	0.098	0.08	0.476	18.31	0.721	1.52	0.343	6.05	0.238	0.25	0.010	22.8	SST	C	N
3.00	0.118	75089S	30.00	1.181	2.50	0.098	0.08	0.436	19.99	0.787	1.52	0.343	6.55	0.258	0.25	0.010	24.8	SST	C	N
3.00	0.118	75129S	7.50	0.295	2.40	0.094	0.65	3.706	3.99	0.157	2.59	0.582	2.69	0.106	0.30	0.012	7.9	SST	C	N
3.00	0.118	75130S	10.00	0.394	2.40	0.094	0.47	2.686	5.49	0.216	2.58	0.580	3.38	0.133	0.30	0.012	10.1	SST	C	N
3.00	0.118	75131S	12.50	0.492	2.40	0.094	0.37	2.107	6.99	0.275	2.57	0.579	4.06	0.160	0.30	0.012	12.3	SST	C	N
3.00	0.118	75132S	15.00	0.591	2.40	0.094	0.30	1.733	8.51	0.335	2.58	0.581	4.75	0.187	0.30	0.012	14.6	SST	C	N
3.00	0.118	75133S	17.50	0.689	2.40	0.094	0.26	1.471	10.01	0.394	2.58	0.580	5.41	0.213	0.30	0.012	16.8	SST	C	N
3.00	0.118	75134S	20.00	0.787	2.40	0.094	0.22	1.279	11.51	0.453	2.57	0.579	6.10	0.240	0.30	0.012	19	SST	C	N
3.00	0.118	75135S	22.50	0.886	2.40	0.094	0.20	1.130	13.03	0.513	2.58	0.580	6.78	0.267	0.30	0.012	21.3	SST	C	N
3.00	0.118	75136S	25.00	0.984	2.40	0.094	0.18	1.013	14.55	0.573	2.58	0.580	7.47	0.294	0.30	0.012	23.5	SST	C	N
3.00	0.118	75137S	27.50	1.083	2.40	0.094	0.16	0.918	16.05	0.632	2.58	0.580	8.13	0.320	0.30	0.012	25.7	SST	C	N
3.00	0.118	75138S	30.00	1.181	2.40	0.094	0.15	0.839	17.55	0.691	2.58	0.580	8.81	0.347	0.30	0.012	27.9	SST	C	N
3.00	0.118	75189S	6.50	0.256	2.28	0.090	1.59	9.063	2.74	0.108	4.35	0.979	2.39	0.094	0.36	0.014	6.4	SST	CG	N
3.00	0.118	75190S	8.00	0.315	2.28	0.090	1.26	7.205	3.45	0.136	4.36	0.980	2.79	0.110	0.36	0.014	7.6	SST	CG	N
3.00	0.118	75191S	9.50	0.374	2.28	0.090	1.05	5.973	4.17	0.164	4.36	0.980	3.20	0.126	0.36	0.014	8.7	SST	CG	N
3.00	0.118	75192S	11.00	0.433	2.28	0.090	0.89	5.106	4.88	0.192	4.36	0.980	3.61	0.142	0.36	0.014	9.8	SST	CG	N
3.00	0.118	75193S	12.50	0.492	2.28	0.090	0.78	4.457	5.59	0.220	4.36	0.981	3.99	0.157	0.36	0.014	11	SST	CG	N
3.00	0.118	75194S	14.00	0.551	2.28	0.090	0.69	3.957	6.27	0.247	4.34	0.977	4.39	0.173	0.36	0.014	12.1	SST	CG	N
3.00	0.118	75195S	15.50	0.610	2.28	0.090	0.62	3.557	6.99	0.275	4.35	0.978	4.80	0.189	0.36	0.014	13.3	SST	CG	N
3.00	0.118	75196S	17.00	0.669	2.28	0.090	0.57	3.224	7.72	0.304	4.36	0.980	5.26	0.207	0.36	0.014	14.4	SST	CG	N
3.00	0.118	75197S	19.00	0.748	2.28	0.090	0.50	2.874	8.66	0.341	4.36	0.980	5.79	0.228	0.36	0.014	15.9	SST	CG	N
3.00	0.118	75198S	25.00	0.984	2.28	0.090	0.38	2.166	11.48	0.452	4.35	0.979	7.39	0.291	0.36	0.014	20.5	SST	CG	N
3.00	0.118	75199S	27.50	1.083	2.28	0.090	0.34	1.966	12.65	0.498	4.35	0.979	8.15	0.321	0.36	0.014	22.4	SST	CG	N
3.00	0.118	75200S	30.00	1.181	2.28	0.090	0.31	1.791	13.89	0.547	4.36	0.980	8.84	0.348	0.36	0.014	24.3	SST	CG	N
3.00	0.118	75201S	40.00	1.575	2.28	0.090	0.24	1.341	18.54	0.730	4.35	0.979	11.61	0.457	0.36	0.014	31.9	SST	CG	N
3.00	0.118	75226S	6.50	0.256	1.98	0.078	6.25	35.661	1.85	0.073	11.57	2.603	3.76	0.148	0.51	0.020	7.6	SST	CG	N
3.00	0.118	75227S	8.00	0.315	1.98	0.078	4.91	28.022	2.34	0.092	11.46	2.578	4.52	0.178	0.51	0.020	9.1	SST	CG	N
3.00	0.118	75228S	9.50	0.374	1.98	0.078	4.04	23.074	2.85	0.112	11.48	2.584	5.26	0.207	0.51	0.020	10.6	SST	CG	N
3.00	0.118	75229S	11.00	0.433	1.98	0.078	3.43	19.609	3.35	0.132	11.50	2.588	6.02	0.237	0.51	0.020	12.1	SST	CG	N
3.00	0.118	75230S	12.50	0.492	1.98	0.078	2.99	17.052	3.86	0.152	11.52	2.592	6.76	0.266	0.51	0.020	13.6	SST	CG	N
3.00	0.118	75231S	14.00	0.551	1.98	0.078	2.64	15.086	4.34	0.171	11.47	2.580	7.52	0.296	0.51	0.020	15.1	SST	CG	N
3.00	0.118	75232S	15.50	0.610	1.98	0.078	2.37	13.528	4.85	0.191	11.48	2.584	8.28	0.326	0.51	0.020	16.7	SST	CG	N
3.00	0.118	75233S	17.00	0.669	1.98	0.078	2.15	12.262	5.36	0.211	11.50	2.587	9.02	0.355	0.51	0.020	18.2	SST	CG	N
3.00	0.118	75234S	19.00	0.748	1.98	0.078	1.91	10.896	6.02	0.237	11.48	2.582	10.03	0.395	0.51	0.020	20.2	SST	CG	N
3.00	0.118	75235S	25.00	0.984	1.98	0.078	1.43	8.172	8.03	0.316	11.48	2.582	13.03	0.513	0.51	0.020	26.3	SST	CG	N
3.00	0.118	75236S	27.50	1.083	1.98	0.078	1.30	7.397	8.89	0.350	11.51	2.589	14.30	0.563	0.51	0.020	28.8	SST	CG	N
3.00	0.118	75237S	30.00	1.181	1.98	0.078	1.19	6.764	9.70	0.382	11.48	2.584	15.54	0						




Metric Compression Springs

O.D. mm	Century Stock Number	Free Length mm	I.D. mm	Rate N/mm	Sugg Max. Defl. mm	Sugg Max. load N	Solid Length mm	Wire Dia. mm	Total Coils Mat'l	Ends E	Finish F n sh									
Inches		Inches	Inches	Lbs./In.	Inches	Lbs.	Inches	Inches												
3.25	0.128	75837	40.00	1.575	2.65	0.104	0.09	0.510	28.99	1.141	2.61	0.587	11.01	0.433	0.30	0.012	35.7	MW	C	N
3.25	0.128	75838	40.00	1.575	2.65	0.104	0.10	0.570	28.99	1.141	2.90	0.652	11.01	0.433	0.30	0.012	35.7	MW	C	N
3.45	0.136	75090	7.10	0.280	2.95	0.116	0.36	2.050	5.49	0.216	1.97	0.443	1.63	0.064	0.25	0.010	5.5	MW	C	N
3.45	0.136	75091	10.70	0.420	2.95	0.116	0.23	1.310	8.56	0.337	1.96	0.440	2.13	0.084	0.25	0.010	7.5	MW	C	N
3.45	0.136	75092	16.10	0.630	2.95	0.116	0.15	0.850	13.23	0.521	1.96	0.440	2.87	0.113	0.25	0.010	10.5	MW	C	N
3.45	0.136	75093	23.30	0.920	2.95	0.116	0.10	0.580	19.41	0.764	1.95	0.439	3.89	0.153	0.25	0.010	14.5	MW	C	N
3.45	0.136	75094	34.10	1.340	2.95	0.116	0.07	0.390	28.73	1.131	1.95	0.439	5.38	0.212	0.25	0.010	20.5	MW	C	N
3.45	0.136	75095S	7.10	0.280	2.95	0.116	0.29	1.676	4.52	0.178	1.32	0.298	1.63	0.064	0.25	0.010	5.5	SST	C	N
3.45	0.136	75091S	10.70	0.421	2.95	0.116	0.19	1.067	7.11	0.280	1.33	0.299	2.13	0.084	0.25	0.010	7.5	SST	C	N
3.45	0.136	75092S	16.10	0.634	2.95	0.116	0.12	0.690	11.00	0.433	1.33	0.299	2.87	0.113	0.25	0.010	10.5	SST	C	N
3.45	0.136	75093S	23.30	0.917	2.95	0.116	0.08	0.469	16.21	0.638	1.33	0.299	3.89	0.153	0.25	0.010	14.5	SST	C	N
3.45	0.136	75094S	34.10	1.343	2.95	0.116	0.06	0.317	23.95	0.943	1.33	0.299	5.38	0.212	0.25	0.010	20.5	SST	C	N
3.45	0.136	75839	10.00	0.394	2.65	0.104	1.30	7.420	5.96	0.235	7.75	1.742	4.04	0.159	0.40	0.016	9.1	MW	C	N
3.45	0.136	75840	15.00	0.591	2.65	0.104	0.69	3.940	8.44	0.332	5.82	1.309	6.56	0.258	0.40	0.016	15.4	MW	C	N
3.45	0.136	75841	20.00	0.787	2.65	0.104	0.50	2.860	11.40	0.449	5.70	1.281	8.60	0.339	0.40	0.016	20.5	MW	C	N
3.45	0.136	75842	25.00	0.984	2.65	0.104	0.39	2.230	14.64	0.576	5.71	1.284	10.36	0.408	0.40	0.016	24.9	MW	C	N
3.45	0.136	75843	40.00	1.575	2.65	0.104	0.25	1.430	23.92	0.942	5.98	1.344	16.08	0.633	0.40	0.016	39.2	MW	C	N
3.52	0.139	75149	6.30	0.250	2.88	0.113	1.03	5.860	3.94	0.155	4.04	0.909	2.08	0.082	0.32	0.013	5.5	MW	C	N
3.52	0.139	75150	9.40	0.370	2.88	0.113	0.65	3.730	6.20	0.244	4.05	0.911	2.72	0.107	0.32	0.013	7.5	MW	C	N
3.52	0.139	75151	14.00	0.550	2.88	0.113	0.42	2.420	9.58	0.377	4.04	0.910	3.68	0.145	0.32	0.013	10.5	MW	C	N
3.52	0.139	75152	20.10	0.790	2.88	0.113	0.29	1.640	14.07	0.554	4.04	0.910	4.96	0.195	0.32	0.013	14.5	MW	C	N
3.52	0.139	75153	29.30	1.150	2.88	0.113	0.19	1.110	20.85	0.821	4.04	0.910	6.88	0.271	0.32	0.013	20.5	MW	C	N
3.52	0.139	75149S	6.30	0.248	2.88	0.113	0.79	4.499	3.35	0.132	2.64	0.594	2.08	0.082	0.32	0.013	5.5	SST	C	N
3.52	0.139	75150S	9.40	0.370	2.88	0.113	0.50	2.863	5.28	0.208	2.65	0.596	2.72	0.107	0.32	0.013	7.5	SST	C	N
3.52	0.139	75151S	14.00	0.551	2.88	0.113	0.33	1.853	8.18	0.322	2.65	0.597	3.68	0.145	0.32	0.013	10.5	SST	C	N
3.52	0.139	75152S	20.10	0.791	2.88	0.113	0.22	1.260	12.01	0.473	2.65	0.596	4.96	0.195	0.32	0.013	14.5	SST	C	N
3.52	0.139	75153S	29.30	1.154	2.88	0.113	0.15	0.851	17.78	0.700	2.65	0.596	6.88	0.271	0.32	0.013	20.5	SST	C	N
3.52	0.139	75844	6.30	0.248	2.88	0.113	0.91	5.200	4.22	0.166	3.84	0.863	2.08	0.082	0.32	0.013	5.5	MW	C	N
3.52	0.139	75845	9.40	0.370	2.88	0.113	0.58	3.310	6.68	0.263	3.87	0.871	2.72	0.107	0.32	0.013	7.5	MW	C	N
3.52	0.139	75846	14.00	0.551	2.88	0.113	0.37	2.110	10.32	0.406	3.82	0.858	3.68	0.145	0.32	0.013	10.5	MW	C	N
3.52	0.139	75847	20.00	0.787	2.88	0.113	0.25	1.430	15.04	0.592	3.76	0.845	4.96	0.195	0.32	0.013	14.5	MW	C	N
3.60	0.142	75174	5.60	0.220	2.80	0.110	2.31	13.180	3.00	0.118	6.91	1.555	2.60	0.102	0.40	0.016	5.5	MW	C	Z
3.60	0.142	75175	8.30	0.330	2.80	0.110	1.47	8.390	4.90	0.193	7.20	1.619	3.40	0.134	0.40	0.016	7.5	MW	C	Z
3.60	0.142	75176	12.00	0.470	2.80	0.110	0.95	5.430	7.39	0.291	7.02	1.580	4.60	0.181	0.40	0.016	10.5	MW	C	Z
3.60	0.142	75177	17.50	0.690	2.80	0.110	0.65	3.690	11.30	0.445	7.30	1.642	6.20	0.244	0.40	0.016	14.5	MW	C	Z
3.60	0.142	75178	25.50	1.000	2.80	0.110	0.44	2.490	16.89	0.665	7.37	1.659	8.60	0.339	0.40	0.016	20.5	MW	C	Z
3.60	0.142	75174S	5.60	0.220	2.80	0.110	1.92	10.985	2.57	0.101	4.93	1.109	2.60	0.102	0.40	0.016	5.5	SST	C	N
3.60	0.142	75175S	8.30	0.327	2.80	0.110	1.22	6.990	4.01	0.158	4.91	1.104	3.40	0.134	0.40	0.016	7.5	SST	C	N
3.60	0.142	75176S	12.00	0.472	2.80	0.110	0.79	4.523	6.22	0.245	4.92	1.108	4.60	0.181	0.40	0.016	10.5	SST	C	N
3.60	0.142	75177S	17.50	0.689	2.80	0.110	0.54	3.076	9.14	0.360	4.92	1.107	6.20	0.244	0.40	0.016	14.5	SST	C	N
3.60	0.142	75178S	25.50	1.004	2.80	0.110	0.36	2.078	13.51	0.532	4.91	1.105	8.60	0.339	0.40	0.016	20.5	SST	C	N
3.60	0.142	75848	6.10	0.240	2.80	0.110	2.70	15.420	2.76	0.109	7.45	1.675	2.40	0.094	0.40	0.016	5	MW	C	N
3.65	0.144	75849	5.00	0.197	3.15	0.124	0.44	2.510	3.67	0.144	1.62	0.363	1.33	0.052	0.25	0.010	4.3	MW	C	N
3.65	0.144	75850	5.00	0.197	2.65	0.104	5.80	33.120	2.25	0.089	13.05	2.934	2.75	0.108	0.50	0.020	5.5	MW	CG	N
3.65	0.144	75851	10.00	0.394	3.15	0.124	0.19	1.080	7.95	0.313	1.51	0.340	2.05	0.081	0.25	0.010	7.2	MW	CG	N
3.65	0.144	75852	10.00	0.394	2.65	0.104	2.50	14.280	4.95	0.195	12.38	2.782	5.05	0.199	0.50	0.020	10.1	MW	CG	N
3.65	0.144	75853	15.00	0.591	2.65	0.104	1.60	9.140	7.70	0.303	12.32	2.770	7.30	0.287	0.50	0.020	14.6	MW	CG	N
3.65	0.144	75854	20.00	0.787	2.65	0.104	1.20	6.850	10.40	0.409	12.48	2.806	9.60	0.378	0.50	0.020	19.2	MW	CG	N
3.65	0.144	75855	25.00	0.984	3.15	0.124	0.07	0.400	20.75	0.817	1.45	0.327	4.25	0.167	0.25	0.010	16	MW	CG	N
3.65	0.144	75856	25.00	0.984	2.65	0.104	0.94	5.370	13.15	0.518	12.36	2.779	11.85	0.467	0.50	0.020	23.7	MW	CG	N
3.65	0.144	75857	30.00	1.181	3.15	0.124	0.06	0.340	25.00	0.984	1.50	0.337	5.00	0.197	0.25	0.010	19	MW	C	N
3.65	0.144	75858	30.00	1.181	2.65	0.104	0.77	4.400	15.85	0.624	12.21	2.744	14.15	0.557	0.50	0.020	28.3	MW	CG	N
3.65	0.144	75859	35.00	1.378	2.65	0.104	0.66	3.770	18.60	0.732	12.28	2.760	16.40	0.646	0.50	0.020	32.8	MW	CG	N
3.70	0.146	75244	5.50	0.220	2.70	0.106	5.63	32.180	2.39	0.094	13.44	3.025	2.75	0.108	0.50	0.020	5.5	MW	CG	Z
3.70	0.146	75245	7.90	0.310	2.70	0.106	3.58	20.480	3.76	0.148	13.47	3.031								




Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length		I.D.		Rate		Sugg. Max. Defl. mm Inches	Sugg. Max. load N Lbs.	Solid Length		Wire Dia. mm Inches		Total Coils	Mat'l	Ends	Finish	
		mm	Inches	mm	Inches	N/mm	Lbs./In.	mm	mm	Inches	mm	mm	Inches					
3.71	0.146	75320	19.00	0.750	2.49	0.098	2.78	15.890	8.10	0.319	22.53	5.069	10.90	0.429	0.61	0.024	18	MW CG Z
3.71	0.146	75321	25.00	0.980	2.49	0.098	2.08	11.880	10.82	0.426	22.49	5.061	14.17	0.558	0.61	0.024	23.4	MW CG Z
3.71	0.146	75322	27.50	1.080	2.49	0.098	1.88	10.750	11.96	0.471	22.50	5.063	15.54	0.612	0.61	0.024	25.6	MW CG Z
3.71	0.146	75323	30.00	1.180	2.49	0.098	1.72	9.820	13.11	0.516	22.52	5.067	16.89	0.665	0.61	0.024	27.8	MW CG Z
3.71	0.146	75324	40.00	1.580	2.49	0.098	1.28	7.290	17.65	0.695	22.52	5.067	22.35	0.880	0.61	0.024	36.8	MW CG Z
3.71	0.146	75312S	6.50	0.256	2.49	0.098	7.79	44.457	2.01	0.079	15.61	3.512	4.09	0.161	0.61	0.024	6.8	SST CG N
3.71	0.146	75313S	8.00	0.315	2.49	0.098	6.07	34.636	2.57	0.101	15.55	3.498	4.90	0.193	0.61	0.024	8.1	SST CG N
3.71	0.146	75314S	9.50	0.374	2.49	0.098	4.97	28.380	3.12	0.123	15.52	3.491	5.72	0.225	0.61	0.024	9.5	SST CG N
3.71	0.146	75315S	11.00	0.433	2.49	0.098	4.21	24.032	3.68	0.145	15.49	3.485	6.55	0.258	0.61	0.024	10.8	SST CG N
3.71	0.146	75316S	12.50	0.492	2.49	0.098	3.65	20.842	4.27	0.168	15.56	3.501	7.37	0.290	0.61	0.024	12.1	SST CG N
3.71	0.146	75317S	14.00	0.551	2.49	0.098	3.22	18.401	4.83	0.190	15.54	3.496	8.18	0.322	0.61	0.024	13.5	SST CG N
3.71	0.146	75318S	15.50	0.610	2.49	0.098	2.88	16.468	5.39	0.212	15.52	3.491	8.99	0.354	0.61	0.024	14.8	SST CG N
3.71	0.146	75319S	17.00	0.669	2.49	0.098	2.61	14.911	5.94	0.234	15.51	3.489	9.80	0.386	0.61	0.024	16.2	SST CG N
3.71	0.146	75320S	19.00	0.748	2.49	0.098	2.32	13.236	6.71	0.264	15.53	3.494	10.90	0.429	0.61	0.024	18	SST CG N
3.71	0.146	75321S	25.00	0.984	2.49	0.098	1.73	9.896	8.97	0.353	15.52	3.493	14.17	0.558	0.61	0.024	23.4	SST CG N
3.71	0.146	75322S	27.50	1.083	2.49	0.098	1.57	8.955	9.91	0.390	15.52	3.492	15.54	0.612	0.61	0.024	25.6	SST CG N
3.71	0.146	75323S	30.00	1.181	2.49	0.098	1.43	8.180	10.85	0.427	15.52	3.493	16.89	0.665	0.61	0.024	27.8	SST CG N
3.71	0.146	75324S	40.00	1.575	2.49	0.098	1.06	6.073	14.61	0.575	15.52	3.492	22.35	0.880	0.61	0.024	36.8	SST CG N
3.75	0.148	75864	5.00	0.197	3.15	0.124	0.77	4.400	3.32	0.131	2.56	0.575	1.68	0.066	0.30	0.012	4.6	MW C N
3.75	0.148	75865	10.00	0.394	3.15	0.124	0.34	1.940	7.33	0.289	2.49	0.560	2.67	0.105	0.30	0.012	7.9	MW C N
3.75	0.148	75866	30.00	1.181	3.15	0.124	0.11	0.630	23.40	0.921	2.57	0.579	6.60	0.260	0.30	0.012	21	MW C N
3.75	0.148	75867	40.00	1.575	3.15	0.124	0.08	0.460	31.42	1.237	2.51	0.565	8.58	0.338	0.30	0.012	27.6	MW C N
3.83	0.151	75868	5.10	0.201	2.57	0.101	16.00	91.360	1.54	0.061	24.59	5.529	3.15	0.124	0.63	0.025	5	MW CG N
3.83	0.151	75869	5.50	0.217	2.57	0.101	14.00	79.940	1.76	0.069	24.58	5.527	3.47	0.137	0.63	0.025	5.5	MW CG N
3.83	0.151	75870	7.50	0.295	2.57	0.101	9.80	55.960	2.51	0.099	24.59	5.528	4.41	0.174	0.63	0.025	7	MW CG N
3.83	0.151	75871	11.00	0.433	2.57	0.101	5.80	33.120	4.24	0.167	24.59	5.527	6.62	0.261	0.63	0.025	10.5	MW CG N
3.83	0.151	75872	16.00	0.630	2.57	0.101	3.90	22.270	6.30	0.248	24.59	5.527	9.14	0.360	0.63	0.025	14.5	MW CG N
3.83	0.151	75873	23.00	0.906	2.57	0.101	2.60	14.850	9.46	0.372	24.59	5.528	12.92	0.509	0.63	0.025	20.5	MW CG N
3.95	0.156	75874	5.00	0.197	3.15	0.124	1.90	10.850	2.60	0.102	4.94	1.111	2.40	0.094	0.40	0.016	5	MW C N
3.95	0.156	75875	10.00	0.394	3.15	0.124	0.87	4.970	6.12	0.241	5.32	1.197	3.88	0.153	0.40	0.016	8.7	MW C N
3.95	0.156	75876	15.00	0.591	3.15	0.124	0.56	3.200	9.60	0.378	5.38	1.209	5.40	0.213	0.40	0.016	12.5	MW C N
3.95	0.156	75877	30.00	1.181	3.15	0.124	0.27	1.540	20.12	0.792	5.43	1.221	9.88	0.389	0.40	0.016	23.7	MW C N
3.95	0.156	75878	40.00	1.575	3.15	0.124	0.20	1.140	27.12	1.068	5.42	1.219	12.88	0.507	0.40	0.016	31.2	MW C N
4.15	0.163	75879	20.00	0.787	3.15	0.124	0.90	5.140	11.75	0.463	10.58	2.377	8.25	0.325	0.50	0.020	16.5	MW CG N
4.15	0.163	75880	25.00	0.984	3.15	0.124	0.73	4.170	15.00	0.591	10.95	2.462	10.00	0.394	0.50	0.020	20	MW CG N
4.15	0.163	75881	40.00	1.575	3.15	0.124	0.44	2.510	24.10	0.949	10.60	2.384	15.90	0.626	0.50	0.020	31.8	MW CG N
4.32	0.170	75154	8.70	0.340	3.68	0.144	0.53	3.030	6.30	0.248	3.34	0.752	2.08	0.082	0.32	0.013	5.5	MW C N
4.32	0.170	75155	13.10	0.520	3.68	0.144	0.34	1.930	9.88	0.389	3.33	0.750	2.72	0.107	0.32	0.013	7.5	MW C N
4.32	0.170	75156	19.80	0.780	3.68	0.144	0.22	1.250	15.29	0.602	3.34	0.751	3.68	0.145	0.32	0.013	10.5	MW C N
4.32	0.170	75157	28.60	1.130	3.68	0.144	0.15	0.850	22.48	0.885	3.34	0.751	4.96	0.195	0.32	0.013	14.5	MW C N
4.32	0.170	75158	41.90	1.650	3.68	0.144	0.10	0.570	33.30	1.311	3.34	0.751	6.88	0.271	0.32	0.013	20.5	MW C N
4.32	0.170	75154S	8.70	0.343	3.68	0.144	0.40	2.304	5.44	0.214	2.19	0.493	2.08	0.082	0.32	0.013	5.5	SST C N
4.32	0.170	75155S	13.10	0.516	3.68	0.144	0.26	1.466	8.53	0.336	2.19	0.493	2.72	0.107	0.32	0.013	7.5	SST C N
4.32	0.170	75156S	19.80	0.780	3.68	0.144	0.17	0.949	13.16	0.518	2.19	0.492	3.68	0.145	0.32	0.013	10.5	SST C N
4.32	0.170	75157S	28.60	1.126	3.68	0.144	0.11	0.645	19.38	0.763	2.19	0.492	4.96	0.195	0.32	0.013	14.5	SST C N
4.32	0.170	75158S	41.90	1.650	3.68	0.144	0.08	0.436	28.65	1.128	2.19	0.492	6.88	0.271	0.32	0.013	20.5	SST C N
4.32	0.170	75882	8.70	0.343	3.68	0.145	0.46	2.630	6.62	0.261	3.05	0.685	2.08	0.082	0.32	0.013	5.5	MW C N
4.32	0.170	75883	13.00	0.512	3.68	0.145	0.30	1.710	10.28	0.405	3.08	0.693	2.72	0.107	0.32	0.013	7.5	MW C N
4.32	0.170	75884	20.00	0.787	3.68	0.145	0.19	1.080	16.32	0.643	3.10	0.697	3.68	0.145	0.32	0.013	10.5	MW C N
4.32	0.170	75885	29.00	1.142	3.68	0.145	0.13	0.740	24.04	0.946	3.13	0.703	4.96	0.195	0.32	0.013	14.5	MW C N
4.40	0.173	75179	7.50	0.300	3.60	0.141	1.18	6.750	4.90	0.193	5.79	1.303	2.60	0.102	0.40	0.016	5.5	MW C Z
4.40	0.173	75180	11.00	0.430	3.60	0.141	0.75	4.300	7.60	0.299	5.71	1.284	3.40	0.134	0.40	0.016	7.5	MW C Z
4.40	0.173	75181	16.50	0.650	3.60	0.141	0.49	2.780	11.91	0.469	5.79	1.303	4.60	0.181	0.40	0.016	10.5	MW C Z
4.40	0.173	75182	24.00	0.950	3.60	0.141	0.33	1.890	17.81	0.701	5.89	1.325	6.20	0.244	0.40	0.016	14.5	MW C Z
4.40	0.173	75183	35.50	1.400	3.60	0.141	0.22	1.280	26.90	1.059	6.01	1.352	8.60	0.339	0.40	0.016	20.5	MW C Z
4.40	0.173	75179S	7.50	0.295	3.60	0.141	0.99	5.624	4.14	0.163	4.08	0.917	2.60					




Metric Compression Springs

O.D. mm	Century Stock Number	Free Length mm	I.D. mm	Rate N/mm	Sugg Max. Defl. mm	Sugg Max. load N	Solid Length mm	Wire Dia. mm	Total Coils Mat'l	Ends E F sh								
Inches		Inches	Inches	Lbs./In.	Inches	Lbs.	Inches	Inches	Mat'l									
4.60	0.181	75202	6.50	0.260	3.88	0.153	0.98	5.570	4.52	0.178	4.40	0.991	1.42	0.056	0.36	0.014	4.1	MW CG Z
4.60	0.181	75203	8.00	0.320	3.88	0.153	0.78	4.430	5.69	0.224	4.41	0.992	1.60	0.063	0.36	0.014	4.6	MW CG Z
4.60	0.181	75204	9.50	0.370	3.88	0.153	0.64	3.670	6.88	0.271	4.42	0.995	1.80	0.071	0.36	0.014	5.2	MW CG Z
4.60	0.181	75205	11.00	0.430	3.88	0.153	0.55	3.140	8.03	0.316	4.41	0.992	1.98	0.078	0.36	0.014	5.7	MW CG Z
4.60	0.181	75206	12.50	0.490	3.88	0.153	0.48	2.740	9.20	0.362	4.41	0.992	2.18	0.086	0.36	0.014	6.3	MW CG Z
4.60	0.181	75207	14.00	0.550	3.88	0.153	0.43	2.430	10.39	0.409	4.42	0.994	2.36	0.093	0.36	0.014	6.8	MW CG Z
4.60	0.181	75208	15.50	0.610	3.88	0.153	0.38	2.180	11.58	0.456	4.42	0.994	2.54	0.100	0.36	0.014	7.3	MW CG Z
4.60	0.181	75209	17.00	0.670	3.88	0.153	0.35	1.980	12.75	0.502	4.42	0.994	2.74	0.108	0.36	0.014	7.9	MW CG Z
4.60	0.181	75210	19.00	0.750	3.88	0.153	0.31	1.770	14.25	0.561	4.41	0.993	3.00	0.118	0.36	0.014	8.6	MW CG Z
4.60	0.181	75211	25.00	0.980	3.88	0.153	0.23	1.330	18.97	0.747	4.42	0.994	3.73	0.147	0.36	0.014	10.8	MW CG Z
4.60	0.181	75212	30.00	1.180	3.88	0.153	0.19	1.100	22.94	0.903	4.41	0.993	4.37	0.172	0.36	0.014	12.6	MW CG Z
4.60	0.181	75213	40.00	1.580	3.88	0.153	0.14	0.820	30.76	1.211	4.41	0.993	5.61	0.221	0.36	0.014	16.2	MW CG Z
4.60	0.181	75214	6.50	0.260	3.68	0.145	2.40	13.730	3.66	0.144	8.79	1.977	2.01	0.079	0.46	0.018	4.5	MW CG Z
4.60	0.181	75215	8.00	0.320	3.68	0.145	1.90	10.830	4.62	0.182	8.76	1.971	2.31	0.091	0.46	0.018	5.1	MW CG Z
4.60	0.181	75216	9.50	0.370	3.68	0.145	1.57	8.940	5.61	0.221	8.78	1.976	2.62	0.103	0.46	0.018	5.8	MW CG Z
4.60	0.181	75217	11.00	0.430	3.68	0.145	1.33	7.610	6.60	0.260	8.80	1.979	2.90	0.114	0.46	0.018	6.4	MW CG Z
4.60	0.181	75218	12.50	0.490	3.68	0.145	1.16	6.630	7.57	0.298	8.78	1.976	3.20	0.126	0.46	0.018	7.1	MW CG Z
4.60	0.181	75219	14.00	0.550	3.68	0.145	1.03	5.870	8.56	0.337	8.79	1.978	3.51	0.138	0.46	0.018	7.8	MW CG Z
4.60	0.181	75220	15.50	0.610	3.68	0.145	0.92	5.270	9.53	0.375	8.78	1.976	3.78	0.149	0.46	0.018	8.4	MW CG Z
4.60	0.181	75221	17.00	0.670	3.68	0.145	0.84	4.780	10.49	0.413	8.77	1.974	4.09	0.161	0.46	0.018	9.1	MW CG Z
4.60	0.181	75222	19.00	0.750	3.68	0.145	0.74	4.250	11.81	0.465	8.78	1.976	4.50	0.177	0.46	0.018	10	MW CG Z
4.60	0.181	75223	25.00	0.980	3.68	0.145	0.56	3.190	15.72	0.619	8.78	1.975	5.69	0.224	0.46	0.018	12.6	MW CG Z
4.60	0.181	75224	30.00	1.180	3.68	0.145	0.46	2.640	19.00	0.748	8.78	1.975	6.68	0.263	0.46	0.018	14.8	MW CG Z
4.60	0.181	75225	40.00	1.580	3.68	0.145	0.35	1.970	25.48	1.003	8.78	1.976	8.66	0.341	0.46	0.018	19.2	MW CG Z
4.60	0.181	75280	6.50	0.260	3.48	0.137	4.72	26.960	3.23	0.127	15.22	3.424	2.77	0.109	0.56	0.022	5.1	MW CG Z
4.60	0.181	75281	8.00	0.320	3.48	0.137	3.69	21.100	4.12	0.162	15.19	3.418	3.23	0.127	0.56	0.022	5.9	MW CG Z
4.60	0.181	75282	9.50	0.370	3.48	0.137	3.03	17.330	5.00	0.197	15.17	3.414	3.68	0.145	0.56	0.022	6.8	MW CG Z
4.60	0.181	75283	11.00	0.430	3.48	0.137	2.57	14.700	5.89	0.232	15.16	3.410	4.14	0.163	0.56	0.022	7.6	MW CG Z
4.60	0.181	75284	12.50	0.490	3.48	0.137	2.24	12.770	6.78	0.267	15.16	3.410	4.60	0.181	0.56	0.022	8.4	MW CG Z
4.60	0.181	75285	14.00	0.550	3.48	0.137	1.97	11.280	7.67	0.302	15.14	3.407	5.05	0.199	0.56	0.022	9.3	MW CG Z
4.60	0.181	75286	15.50	0.610	3.48	0.137	1.77	10.110	8.56	0.337	15.14	3.407	5.54	0.218	0.56	0.022	10.1	MW CG Z
4.60	0.181	75287	17.00	0.670	3.48	0.137	1.60	9.160	9.45	0.372	15.15	3.408	5.99	0.236	0.56	0.022	11	MW CG Z
4.60	0.181	75288	19.00	0.750	3.48	0.137	1.42	8.130	10.67	0.420	15.18	3.415	6.60	0.260	0.56	0.022	12.1	MW CG Z
4.60	0.181	75289	25.00	0.980	3.48	0.137	1.07	6.090	14.22	0.560	15.16	3.410	8.43	0.332	0.56	0.022	15.5	MW CG Z
4.60	0.181	75290	27.50	1.080	3.48	0.137	0.96	5.510	15.72	0.619	15.16	3.411	9.22	0.363	0.56	0.022	16.9	MW CG Z
4.60	0.181	75291	30.00	1.180	3.48	0.137	0.88	5.040	17.20	0.677	15.16	3.412	9.98	0.393	0.56	0.022	18.3	MW CG Z
4.60	0.181	75292	40.00	1.580	3.48	0.137	0.66	3.740	23.17	0.912	15.16	3.411	13.06	0.514	0.56	0.022	24	MW CG Z
4.60	0.181	75325	6.50	0.260	3.38	0.133	6.81	38.910	2.82	0.111	19.20	4.319	3.05	0.120	0.61	0.024	5.1	MW CG Z
4.60	0.181	75326	8.00	0.320	3.38	0.133	5.31	30.330	3.63	0.143	19.28	4.337	3.56	0.140	0.61	0.024	5.9	MW CG Z
4.60	0.181	75327	9.50	0.370	3.38	0.133	4.35	24.850	4.42	0.174	19.22	4.324	4.09	0.161	0.61	0.024	6.8	MW CG Z
4.60	0.181	75328	11.00	0.430	3.38	0.133	3.68	21.040	5.23	0.206	19.26	4.334	4.60	0.181	0.61	0.024	7.7	MW CG Z
4.60	0.181	75329	12.50	0.490	3.38	0.133	3.19	18.250	6.02	0.237	19.22	4.325	5.13	0.202	0.61	0.024	8.5	MW CG Z
4.60	0.181	75330	14.00	0.550	3.38	0.133	2.82	16.110	6.83	0.269	19.26	4.334	5.66	0.223	0.61	0.024	9.4	MW CG Z
4.60	0.181	75331	15.50	0.610	3.38	0.133	2.52	14.420	7.62	0.300	19.23	4.326	6.17	0.243	0.61	0.024	10.3	MW CG Z
4.60	0.181	75332	17.00	0.670	3.38	0.133	2.28	13.050	8.43	0.332	19.26	4.333	6.71	0.264	0.61	0.024	11.1	MW CG Z
4.60	0.181	75333	19.00	0.750	3.38	0.133	2.03	11.590	9.47	0.373	19.21	4.323	7.39	0.291	0.61	0.024	12.3	MW CG Z
4.60	0.181	75334	25.00	0.980	3.38	0.133	1.52	8.670	12.68	0.499	19.23	4.326	9.47	0.373	0.61	0.024	15.8	MW CG Z
4.60	0.181	75335	27.50	1.080	3.38	0.133	1.37	7.840	14.02	0.552	19.24	4.328	10.34	0.407	0.61	0.024	17.2	MW CG Z
4.60	0.181	75336	30.00	1.180	3.38	0.133	1.25	7.160	15.34	0.604	19.22	4.325	11.23	0.442	0.61	0.024	18.7	MW CG Z
4.60	0.181	75337	40.00	1.580	3.38	0.133	0.93	5.320	20.65	0.813	19.22	4.325	16.08	0.633	0.61	0.024	24.4	MW CG Z
4.60	0.181	75338	50.00	1.970	3.38	0.133	0.74	4.230	25.98	1.023	19.23	4.327	18.19	0.716	0.61	0.024	30.2	MW CG Z
4.60	0.181	75410	6.50	0.260	2.98	0.117	23.99	137.070	1.75	0.069	42.04	9.458	4.17	0.164	0.81	0.032	5.2	MW CG Z
4.60	0.181	75411	8.00	0.320	2.98	0.117	18.37	104.940	2.29	0.090	41.98	9.445	4.95	0.195	0.81	0.032	6.2	MW CG Z
4.60	0.181	75412	9.50	0.370	2.98	0.117	14.88	85.020	2.82	0.111	41.94	9.437	5.74	0.226	0.81	0.032	7.2	MW CG Z
4.60	0.181	75413	11.00	0.430	2.98	0.117	12.50	71.450	3.35	0.132	41.92	9.431	6.53	0.257	0.81	0.032	8.2	MW CG Z
4.60	0.181	75414	12.50	0.490	2.98	0.117	10.78	61.620	3.89	0.153	41.90	9.428	7.32	0.288	0.81	0.032	9.2	MW CG Z
4.60	0.181	75415	14.00	0.550	2.98	0.117	9.47	54.130	4.42	0.174	41.86	9.419	8.10	0.319	0.81	0.032	10.2	MW CG Z
4.60	0.181																	




Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length		I.D.		Rate		Sugg. Max. Defl. mm Inches	Sugg. Max. load N Lbs.	Solid Length		Wire Dia. mm Inches		Total Coils Mat'l	Ends E n d s	F in sh	
		mm	Inches	mm	Inches	N/mm	Lbs./In.	mm	Inches	mm	Inches	mm	Inches				
4.60	0.181	75212S	30.00	1.181	3.88	0.153	0.16	0.916	18.11	0.713	2.90	0.653	4.37	0.172	0.36	0.014	12.6 SST CG N
4.60	0.181	75213S	40.00	1.575	3.88	0.153	0.12	0.683	24.28	0.956	2.90	0.653	5.61	0.221	0.36	0.014	16.2 SST CG N
4.60	0.181	75214S	6.50	0.256	3.68	0.145	2.00	11.437	2.92	0.115	5.84	1.315	2.01	0.079	0.46	0.018	4.5 SST CG N
4.60	0.181	75215S	8.00	0.315	3.68	0.145	1.58	9.021	3.68	0.145	5.81	1.308	2.31	0.091	0.46	0.018	5.1 SST CG N
4.60	0.181	75216S	9.50	0.374	3.68	0.145	1.30	7.447	4.47	0.176	5.83	1.311	2.62	0.103	0.46	0.018	5.8 SST CG N
4.60	0.181	75217S	11.00	0.433	3.68	0.145	1.11	6.339	5.26	0.207	5.83	1.312	2.90	0.114	0.46	0.018	6.4 SST CG N
4.60	0.181	75218S	12.50	0.492	3.68	0.145	0.97	5.523	6.05	0.238	5.84	1.314	3.20	0.126	0.46	0.018	7.1 SST CG N
4.60	0.181	75219S	14.00	0.551	3.68	0.145	0.86	4.890	6.81	0.268	5.83	1.311	3.51	0.138	0.46	0.018	7.8 SST CG N
4.60	0.181	75220S	15.50	0.610	3.68	0.145	0.77	4.390	7.60	0.299	5.84	1.313	3.78	0.149	0.46	0.018	8.4 SST CG N
4.60	0.181	75221S	17.00	0.669	3.68	0.145	0.70	3.982	8.36	0.329	5.82	1.310	4.09	0.161	0.46	0.018	9.1 SST CG N
4.60	0.181	75222S	19.00	0.748	3.68	0.145	0.62	3.540	9.42	0.371	5.84	1.313	4.50	0.177	0.46	0.018	10 SST CG N
4.60	0.181	75223S	25.00	0.984	3.68	0.145	0.47	2.657	12.55	0.494	5.84	1.313	5.69	0.224	0.46	0.018	12.6 SST CG N
4.60	0.181	75224S	30.00	1.181	3.68	0.145	0.39	2.199	15.16	0.597	5.84	1.313	6.68	0.263	0.46	0.018	14.8 SST CG N
4.60	0.181	75225S	40.00	1.575	3.68	0.145	0.29	1.641	20.32	0.800	5.84	1.313	8.66	0.341	0.46	0.018	19.2 SST CG N
4.60	0.181	75280S	6.50	0.256	3.48	0.137	3.93	22.458	2.57	0.101	10.08	2.268	2.77	0.109	0.56	0.022	5.1 SST CG N
4.60	0.181	75281S	8.00	0.315	3.48	0.137	3.08	17.576	3.28	0.129	10.08	2.267	3.23	0.127	0.56	0.022	5.9 SST CG N
4.60	0.181	75282S	9.50	0.374	3.48	0.137	2.53	14.436	4.01	0.158	10.14	2.281	3.68	0.145	0.56	0.022	6.8 SST CG N
4.60	0.181	75283S	11.00	0.433	3.48	0.137	2.15	12.245	4.72	0.186	10.12	2.278	4.14	0.163	0.56	0.022	7.6 SST CG N
4.60	0.181	75284S	12.50	0.492	3.48	0.137	1.86	10.637	5.44	0.214	10.12	2.276	4.60	0.181	0.56	0.022	8.4 SST CG N
4.60	0.181	75285S	14.00	0.551	3.48	0.137	1.65	9.396	6.15	0.242	10.11	2.274	5.05	0.199	0.56	0.022	9.3 SST CG N
4.60	0.181	75286S	15.50	0.610	3.48	0.137	1.48	8.422	6.86	0.270	10.11	2.274	5.54	0.218	0.56	0.022	10.1 SST CG N
4.60	0.181	75287S	17.00	0.669	3.48	0.137	1.34	7.630	7.57	0.298	10.11	2.274	5.99	0.236	0.56	0.022	11 SST CG N
4.60	0.181	75288S	19.00	0.748	3.48	0.137	1.19	6.772	8.53	0.336	10.11	2.275	6.60	0.260	0.56	0.022	12.1 SST CG N
4.60	0.181	75289S	25.00	0.984	3.48	0.137	0.89	5.073	11.41	0.449	10.12	2.278	8.43	0.332	0.56	0.022	15.5 SST CG N
4.60	0.181	75290S	27.50	1.083	3.48	0.137	0.80	4.590	12.60	0.496	10.12	2.277	9.22	0.363	0.56	0.022	16.9 SST CG N
4.60	0.181	75291S	30.00	1.181	3.48	0.137	0.74	4.198	13.77	0.542	10.11	2.275	9.98	0.393	0.56	0.022	18.3 SST CG N
4.60	0.181	75292S	40.00	1.575	3.48	0.137	0.55	3.115	18.57	0.731	10.12	2.277	13.06	0.514	0.56	0.022	24 SST CG N
4.60	0.181	75325S	6.50	0.256	3.38	0.133	5.68	32.412	2.26	0.089	12.82	2.885	3.05	0.120	0.61	0.024	5.1 SST CG N
4.60	0.181	75326S	8.00	0.315	3.38	0.133	4.43	25.265	2.90	0.114	12.80	2.880	3.56	0.140	0.61	0.024	5.9 SST CG N
4.60	0.181	75327S	9.50	0.374	3.38	0.133	3.63	20.700	3.53	0.139	12.79	2.877	4.09	0.161	0.61	0.024	6.8 SST CG N
4.60	0.181	75328S	11.00	0.433	3.38	0.133	3.07	17.526	4.17	0.164	12.77	2.874	4.60	0.181	0.61	0.024	7.7 SST CG N
4.60	0.181	75329S	12.50	0.492	3.38	0.133	2.66	15.202	4.83	0.190	12.84	2.888	5.13	0.202	0.61	0.024	8.5 SST CG N
4.60	0.181	75330S	14.00	0.551	3.38	0.133	2.35	13.420	5.46	0.215	12.82	2.885	5.66	0.223	0.61	0.024	9.4 SST CG N
4.60	0.181	75331S	15.50	0.610	3.38	0.133	2.10	12.012	6.10	0.240	12.81	2.883	6.17	0.243	0.61	0.024	10.3 SST CG N
4.60	0.181	75332S	17.00	0.669	3.38	0.133	1.90	10.871	6.73	0.265	12.80	2.881	6.71	0.264	0.61	0.024	11.1 SST CG N
4.60	0.181	75333S	19.00	0.748	3.38	0.133	1.69	9.654	7.60	0.299	12.83	2.887	7.39	0.291	0.61	0.024	12.3 SST CG N
4.60	0.181	75334S	25.00	0.984	3.38	0.133	1.27	7.222	10.14	0.399	12.81	2.882	9.47	0.373	0.61	0.024	15.8 SST CG N
4.60	0.181	75335S	27.50	1.083	3.38	0.133	1.14	6.531	11.20	0.441	12.80	2.880	10.34	0.407	0.61	0.024	17.2 SST CG N
4.60	0.181	75336S	30.00	1.181	3.38	0.133	1.04	5.964	12.27	0.483	12.80	2.881	11.23	0.442	0.61	0.024	18.7 SST CG N
4.60	0.181	75337S	40.00	1.575	3.38	0.133	0.78	4.432	16.51	0.650	12.80	2.881	16.08	0.633	0.61	0.024	24.4 SST CG N
4.60	0.181	75338S	50.00	1.969	3.38	0.133	0.62	3.524	20.78	0.818	12.81	2.883	18.19	0.716	0.61	0.024	30.2 SST CG N
4.60	0.181	75410S	6.50	0.256	2.98	0.117	20.00	114.179	1.40	0.055	27.91	6.280	4.17	0.164	0.81	0.032	5.2 SST CG N
4.60	0.181	75411S	8.00	0.315	2.98	0.117	15.31	87.415	1.83	0.072	27.97	6.294	4.95	0.195	0.81	0.032	6.2 SST CG N
4.60	0.181	75412S	9.50	0.374	2.98	0.117	12.40	70.822	2.26	0.089	28.01	6.303	5.74	0.226	0.81	0.032	7.2 SST CG N
4.60	0.181	75413S	11.00	0.433	2.98	0.117	10.42	59.518	2.69	0.106	28.04	6.309	6.53	0.257	0.81	0.032	8.2 SST CG N
4.60	0.181	75414S	12.50	0.492	2.98	0.117	8.99	51.329	3.12	0.123	28.06	6.313	7.32	0.288	0.81	0.032	9.2 SST CG N
4.60	0.181	75415S	14.00	0.551	2.98	0.117	7.90	45.090	3.56	0.140	28.06	6.313	8.10	0.319	0.81	0.032	10.2 SST CG N
4.60	0.181	75416S	15.50	0.610	2.98	0.117	7.05	40.251	3.99	0.157	28.08	6.319	8.89	0.350	0.81	0.032	11.2 SST CG N
4.60	0.181	75417S	17.00	0.669	2.98	0.117	6.36	36.327	4.42	0.174	28.09	6.321	9.68	0.381	0.81	0.032	12.1 SST CG N
4.60	0.181	75418S	19.00	0.748	3.02	0.119	5.63	32.154	4.70	0.185	26.44	5.948	10.74	0.423	0.79	0.031	13.5 SST CG N
4.60	0.181	75419S	25.00	0.984	2.98	0.117	4.19	23.907	6.71	0.264	28.05	6.311	13.89	0.547	0.81	0.032	17.4 SST CG N
4.60	0.181	75420S	27.50	1.083	2.98	0.117	3.78	21.600	7.42	0.292	28.03	6.307	15.19	0.598	0.81	0.032	19.1 SST CG N
4.60	0.181	75421S	30.00	1.181	2.98	0.117	3.45	19.700	8.13	0.320	28.02	6.304	16.51	0.650	0.81	0.032	20.7 SST CG N
4.60	0.181	75422S	40.00	1.575	2.98	0.117	2.55	14.569	11.00	0.433	28.04	6.308	21.77	0.857	0.81	0.032	27.3 SST CG N
4.60	0.181	75423S	50.00	1.969	2.98	0.117	2.03	11.562	13.87	0.546	28.06	6.313	27.00	1.063	0.81	0.032	33.8 SST CG N
4.63	0.182	75355S	6.70	0.260	3.37	0.132	7.27	41.530	2.87	0.113	20.86	4.693	3.47	0.136	0.63	0.025	5.5 MW CG Z
4.63	0.182	75356S	9.60	0.380	3.37	0.132	4.63	26.430	4.52	0.178	20.91	4.704	4.73				




Metric Compression Springs

O.D. mm	Century Stock Number	Free Length mm	Free Length Inches	I.D. mm	I.D. Inches	Rate N/mm	Rate Lbs./In.	Sugg Max. Defl. mm	Sugg Max. Defl. Inches	Sugg Max. load N	Sugg Max. load Lbs.	Solid Length mm	Solid Length Inches	Wire Dia. mm	Wire Dia. Inches	Total Coils	Mat'l	Ends	F n sh	
4.80	0.189	75428S	28.00	1.102	3.20	0.125	2.98	17.025	8.74	0.344	26.03	5.857	16.40	0.646	0.80	0.032	20.5	SST	CG	N
4.80	0.189	75892	6.00	0.236	3.20	0.126	22.00	125.620	1.77	0.070	38.92	8.749	4.00	0.157	0.80	0.031	5	MW	CG	N
4.80	0.189	75893	6.90	0.272	3.20	0.126	19.00	108.490	2.05	0.081	38.91	8.748	4.40	0.173	0.80	0.031	5.5	MW	CG	N
4.80	0.189	75894	8.70	0.343	3.20	0.126	13.00	74.230	2.99	0.118	38.91	8.747	5.60	0.220	0.80	0.031	7	MW	CG	N
4.80	0.189	75895	9.70	0.382	3.20	0.126	12.00	68.520	3.24	0.128	38.92	8.749	6.00	0.236	0.80	0.031	7.5	MW	CG	N
4.80	0.189	75896	10.00	0.394	4.20	0.165	0.26	1.480	8.05	0.317	2.09	0.471	1.95	0.077	0.30	0.012	5.5	MW	C	N
4.80	0.189	75897	13.00	0.512	3.20	0.126	8.20	46.820	4.75	0.187	38.92	8.749	8.00	0.315	0.80	0.031	10	MW	CG	N
4.80	0.189	75898	14.00	0.551	3.20	0.126	7.70	43.970	5.05	0.199	38.92	8.749	8.40	0.331	0.80	0.031	10.5	MW	CG	N
4.80	0.189	75899	18.00	0.709	3.20	0.126	5.40	30.830	6.80	0.268	36.72	8.255	11.20	0.441	0.80	0.031	14	MW	CG	N
4.80	0.189	75900	20.00	0.787	4.20	0.165	0.11	0.630	16.79	0.661	1.85	0.415	3.21	0.126	0.30	0.012	9.7	MW	C	N
4.80	0.189	75901	20.00	0.787	3.20	0.126	5.20	29.690	7.48	0.295	38.92	8.749	11.60	0.457	0.80	0.031	14.5	MW	CG	N
4.80	0.189	75902	28.00	1.102	3.20	0.126	3.50	19.990	11.12	0.438	38.92	8.749	16.40	0.646	0.80	0.031	20.5	MW	CG	N
4.80	0.189	75903	30.00	1.181	4.20	0.165	0.07	0.400	25.50	1.004	1.79	0.401	4.50	0.177	0.30	0.012	14	MW	C	N
4.80	0.189	75904	30.00	1.181	4.20	0.165	0.08	0.460	25.50	1.004	2.04	0.459	4.50	0.177	0.30	0.012	14	MW	C	N
4.80	0.189	75905	40.00	1.575	4.20	0.165	0.05	0.290	34.27	1.349	1.71	0.385	5.73	0.226	0.30	0.012	18.1	MW	C	N
4.80	0.189	75906	40.00	1.575	4.20	0.165	0.06	0.340	34.27	1.349	2.06	0.462	5.73	0.226	0.30	0.012	18.1	MW	C	N
5.00	0.197	75907	5.00	0.197	4.20	0.165	1.60	9.140	3.12	0.123	4.99	1.122	1.88	0.074	0.40	0.016	3.7	MW	C	N
5.00	0.197	75908	30.00	1.181	4.20	0.165	0.19	1.080	23.20	0.913	4.41	0.991	6.80	0.268	0.40	0.016	16	MW	CG	N
5.00	0.197	75909	40.00	1.575	4.20	0.165	0.14	0.800	31.20	1.228	4.37	0.982	8.80	0.346	0.40	0.016	21	MW	C	N
5.20	0.205	75910	10.00	0.394	4.20	0.165	1.30	7.420	6.65	0.262	8.65	1.943	3.35	0.132	0.50	0.020	6.7	MW	CG	N
5.20	0.205	75911	15.00	0.591	4.20	0.165	0.82	4.680	10.25	0.404	8.41	1.890	4.75	0.187	0.50	0.020	9.5	MW	CG	N
5.20	0.205	75912	25.00	0.984	4.20	0.165	0.47	2.680	17.50	0.689	8.23	1.849	7.50	0.295	0.50	0.020	15	MW	CG	Z
5.20	0.205	75913	35.00	1.378	4.20	0.165	0.33	1.880	24.75	0.974	8.17	1.836	10.25	0.404	0.50	0.020	20.5	MW	CG	N
5.20	0.205	75914	45.00	1.772	4.20	0.165	0.25	1.430	32.05	1.262	8.01	1.801	12.95	0.510	0.50	0.020	25.9	MW	CG	N
5.40	0.213	75184	10.50	0.410	4.60	0.181	0.61	3.460	7.90	0.311	4.78	1.075	2.60	0.102	0.40	0.016	5.5	MW	C	Z
5.40	0.213	75185	16.00	0.630	4.60	0.181	0.39	2.200	12.60	0.496	4.85	1.091	3.40	0.134	0.40	0.016	7.5	MW	C	Z
5.40	0.213	75186	24.00	0.950	4.60	0.181	0.25	1.420	19.41	0.764	4.83	1.087	4.60	0.181	0.40	0.016	10.5	MW	C	Z
5.40	0.213	75187	35.00	1.380	4.60	0.181	0.17	0.970	28.80	1.134	4.88	1.098	6.20	0.244	0.40	0.016	14.5	MW	C	Z
5.40	0.213	75188	53.00	2.090	4.60	0.181	0.11	0.650	44.17	1.739	5.05	1.137	8.60	0.339	0.40	0.016	20.5	MW	C	Z
5.40	0.213	75184S	10.50	0.413	4.60	0.181	0.50	2.880	6.63	0.261	3.34	0.752	2.60	0.102	0.40	0.016	5.5	SST	C	N
5.40	0.213	75185S	16.00	0.630	4.60	0.181	0.32	1.832	10.41	0.410	3.34	0.751	3.40	0.134	0.40	0.016	7.5	SST	C	N
5.40	0.213	75186S	24.00	0.945	4.60	0.181	0.21	1.186	16.10	0.634	3.34	0.752	4.60	0.181	0.40	0.016	10.5	SST	C	N
5.40	0.213	75187S	35.00	1.378	4.60	0.181	0.14	0.806	23.70	0.933	3.34	0.752	6.20	0.244	0.40	0.016	14.5	SST	C	N
5.40	0.213	75188S	53.00	2.087	4.60	0.181	0.10	0.545	35.05	1.380	3.34	0.752	8.60	0.339	0.40	0.016	20.5	SST	C	N
5.40	0.213	75915	10.00	0.394	4.20	0.165	2.40	13.700	5.80	0.228	13.92	3.129	4.20	0.165	0.60	0.024	7	MW	CG	N
5.40	0.213	75916	11.00	0.433	4.60	0.181	0.70	4.000	7.24	0.285	5.07	1.139	2.40	0.094	0.40	0.016	5	MW	C	N
5.40	0.213	75917	15.00	0.591	4.20	0.165	1.50	8.570	9.00	0.354	13.50	3.035	6.00	0.236	0.60	0.024	10	MW	CG	N
5.40	0.213	75918	20.00	0.787	4.20	0.165	1.10	6.280	12.26	0.483	13.49	3.032	7.74	0.305	0.60	0.024	12.9	MW	CG	N
5.40	0.213	75919	25.00	0.984	4.20	0.165	0.87	4.970	15.52	0.611	13.50	3.035	9.48	0.373	0.60	0.024	15.8	MW	CG	N
5.40	0.213	75920	30.00	1.181	4.20	0.165	0.71	4.050	18.72	0.737	13.29	2.988	11.28	0.444	0.60	0.024	18.8	MW	CG	N
5.40	0.213	75921	40.00	1.575	4.20	0.165	0.53	3.030	25.24	0.994	13.38	3.007	14.76	0.581	0.60	0.024	24.6	MW	CG	N
5.40	0.213	75922	50.00	1.969	4.20	0.165	0.42	2.400	31.70	1.248	13.31	2.993	18.30	0.720	0.60	0.024	30.5	MW	CG	N
5.50	0.217	75254	9.40	0.370	4.50	0.177	1.48	8.440	6.30	0.248	9.30	2.092	2.75	0.108	0.50	0.020	5.5	MW	CG	Z
5.50	0.217	75255	14.00	0.550	4.50	0.177	0.94	5.370	9.88	0.389	9.28	2.089	3.75	0.148	0.50	0.020	7.5	MW	CG	Z
5.50	0.217	75256	20.50	0.810	4.50	0.177	0.61	3.470	15.24	0.600	9.26	2.084	5.25	0.207	0.50	0.020	10.5	MW	CG	Z
5.50	0.217	75257	30.00	1.180	4.50	0.177	0.41	2.360	22.45	0.884	9.28	2.088	7.25	0.285	0.50	0.020	14.5	MW	CG	Z
5.50	0.217	75258	44.50	1.750	4.50	0.177	0.28	1.600	33.25	1.309	9.28	2.089	10.25	0.404	0.50	0.020	20.5	MW	CG	Z
5.50	0.217	75254S	9.40	0.370	4.50	0.177	1.23	7.030	5.03	0.198	6.19	1.392	2.75	0.108	0.50	0.020	5.5	SST	CG	N
5.50	0.217	75255S	14.00	0.551	4.50	0.177	0.78	4.474	7.90	0.311	6.18	1.391	3.75	0.148	0.50	0.020	7.5	SST	CG	N
5.50	0.217	75256S	20.50	0.807	4.50	0.177	0.51	2.895	12.22	0.481	6.19	1.392	5.25	0.207	0.50	0.020	10.5	SST	CG	N
5.50	0.217	75257S	30.00	1.181	4.50	0.177	0.35	1.969	17.96	0.707	6.19	1.392	7.25	0.285	0.50	0.020	14.5	SST	CG	N
5.50	0.217	75258S	44.50	1.752	4.50	0.177	0.23	1.330	26.59	1.047	6.19	1.393	10.25	0.404	0.50	0.020	20.5	SST	CG	N
5.50	0.217	75923	10.00	0.394	4.50	0.177	1.70	9.710	5.48	0.216	9.31	2.094	2.50	0.098	0.50	0.020	5	MW	CG	N
5.50	0.217	75924	15.00	0.591	4.50	0.177	1.00	5.710	9.31	0.367	9.31	2.093	3.50	0.188	0.50	0.020	7	MW	CG	N
5.50	0.217	75925	22.00	0.866	4.50	0.177	0.64	3												




Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends Mat'l	Finish Zinc									
5.80	0.228	75431	17.50	0.690	4.20	0.164	3.98	22.770	8.26	0.325	32.88	7.399	8.40	0.331	0.80	0.032	10.5	MW	CG	Z
5.80	0.228	75432	24.50	0.970	4.20	0.164	2.71	15.480	12.14	0.478	32.89	7.400	11.60	0.457	0.80	0.032	14.5	MW	CG	Z
5.80	0.228	75433	36.00	1.420	4.20	0.164	1.83	10.460	17.96	0.707	32.87	7.395	16.40	0.646	0.80	0.032	20.5	MW	CG	Z
5.80	0.228	75429S	8.30	0.327	4.20	0.164	8.07	46.074	2.74	0.108	22.12	4.976	4.40	0.173	0.80	0.032	5.5	SST	CG	N
5.80	0.228	75430S	12.00	0.472	4.20	0.164	5.06	28.874	4.37	0.172	22.07	4.966	6.00	0.236	0.80	0.032	7.5	SST	CG	N
5.80	0.228	75431S	17.50	0.689	4.20	0.164	3.32	18.972	6.63	0.261	22.01	4.952	8.40	0.331	0.80	0.032	10.5	SST	CG	N
5.80	0.228	75432S	24.50	0.965	4.20	0.164	2.26	12.901	9.75	0.384	22.02	4.954	11.60	0.457	0.80	0.032	14.5	SST	CG	N
5.80	0.228	75433S	36.00	1.417	4.20	0.164	1.53	8.717	14.45	0.569	22.04	4.960	16.40	0.646	0.80	0.032	20.5	SST	CG	N
5.80	0.228	75934	7.20	0.283	4.20	0.165	11.00	62.810	2.99	0.118	32.87	7.389	4.00	0.157	0.80	0.031	5	MW	CG	N
5.80	0.228	75935	8.30	0.327	4.20	0.165	9.50	54.250	3.46	0.136	32.87	7.389	4.40	0.173	0.80	0.031	5.5	MW	CG	N
5.80	0.228	75936	11.00	0.433	4.20	0.165	6.70	38.260	4.91	0.193	32.87	7.389	5.60	0.220	0.80	0.031	7	MW	CG	N
5.80	0.228	75937	12.00	0.472	4.20	0.165	6.10	34.830	5.39	0.212	32.87	7.389	6.00	0.236	0.80	0.031	7.5	MW	CG	N
5.80	0.228	75938	16.00	0.630	4.20	0.165	4.20	23.980	7.83	0.308	32.87	7.389	8.00	0.315	0.80	0.031	10	MW	CG	N
5.80	0.228	75939	18.00	0.709	4.20	0.165	3.90	22.270	8.43	0.332	32.87	7.389	8.40	0.331	0.80	0.031	10.5	MW	CG	N
5.80	0.228	75940	23.00	0.906	4.20	0.165	2.80	15.990	11.74	0.462	32.87	7.389	11.20	0.441	0.80	0.031	14	MW	CG	N
5.80	0.228	75941	25.00	0.984	4.20	0.165	2.70	15.420	12.17	0.479	32.87	7.389	11.60	0.457	0.80	0.031	14.5	MW	CG	N
5.80	0.228	75942	33.00	1.299	4.20	0.165	1.90	10.850	17.00	0.669	32.30	7.261	16.00	0.630	0.80	0.031	20	MW	CG	N
5.80	0.228	75943	36.00	1.417	4.20	0.165	1.80	10.280	18.26	0.719	32.87	7.389	16.40	0.646	0.80	0.031	20.5	MW	CG	N
5.99	0.236	75259	6.50	0.260	4.97	0.196	1.96	11.180	4.52	0.178	8.84	1.990	1.98	0.078	0.51	0.020	4	MW	CG	Z
5.99	0.236	75260	8.00	0.320	4.97	0.196	1.54	8.790	5.74	0.226	8.83	1.987	2.26	0.089	0.51	0.020	4.5	MW	CG	Z
5.99	0.236	75261	9.50	0.370	4.97	0.196	1.27	7.240	6.96	0.274	8.82	1.984	2.54	0.100	0.51	0.020	5.1	MW	CG	Z
5.99	0.236	75262	11.00	0.430	4.97	0.196	1.08	6.150	8.20	0.323	8.83	1.986	2.79	0.110	0.51	0.020	5.6	MW	CG	Z
5.99	0.236	75263	12.50	0.490	4.97	0.196	0.94	5.350	9.42	0.371	8.82	1.985	3.07	0.121	0.51	0.020	6.2	MW	CG	Z
5.99	0.236	75264	14.00	0.550	4.97	0.196	0.83	4.730	10.64	0.419	8.81	1.982	3.35	0.132	0.51	0.020	6.7	MW	CG	Z
5.99	0.236	75265	15.50	0.610	4.97	0.196	0.74	4.240	11.89	0.468	8.82	1.984	3.61	0.142	0.51	0.020	7.3	MW	CG	Z
5.99	0.236	75266	17.00	0.670	4.97	0.196	0.67	3.840	13.11	0.516	8.80	1.981	3.89	0.153	0.51	0.020	7.8	MW	CG	Z
5.99	0.236	75267	19.00	0.750	4.97	0.196	0.60	3.420	14.76	0.581	8.83	1.987	4.24	0.167	0.51	0.020	8.5	MW	CG	Z
5.99	0.236	75268	25.00	0.980	4.97	0.196	0.45	2.560	19.66	0.774	8.80	1.981	5.33	0.210	0.51	0.020	10.7	MW	CG	Z
5.99	0.236	75269	27.50	1.080	4.97	0.196	0.41	2.320	21.74	0.856	8.83	1.986	5.77	0.227	0.51	0.020	11.6	MW	CG	Z
5.99	0.236	75270	30.00	1.180	4.97	0.196	0.37	2.120	23.77	0.936	8.82	1.984	6.22	0.245	0.51	0.020	12.5	MW	CG	Z
5.99	0.236	75271	35.00	1.380	4.97	0.196	0.32	1.810	27.86	1.097	8.83	1.986	7.14	0.281	0.51	0.020	14.3	MW	CG	Z
5.99	0.236	75272	40.00	1.580	4.97	0.196	0.28	1.580	31.98	1.259	8.84	1.989	8.03	0.316	0.51	0.020	16.1	MW	CG	Z
5.99	0.236	75273	45.00	1.770	4.97	0.196	0.25	1.400	36.07	1.420	8.84	1.988	8.94	0.352	0.51	0.020	18	MW	CG	Z
5.99	0.236	75274	50.00	1.970	4.97	0.196	0.22	1.260	40.18	1.582	8.86	1.993	9.83	0.387	0.51	0.020	19.7	MW	CG	Z
5.99	0.236	75339	6.50	0.260	4.77	0.188	3.74	21.350	3.94	0.155	14.71	3.309	2.57	0.101	0.61	0.024	4.3	MW	CG	Z
5.99	0.236	75340	8.00	0.320	4.77	0.188	2.91	16.640	5.06	0.199	14.72	3.311	2.95	0.116	0.61	0.024	4.9	MW	CG	Z
5.99	0.236	75341	9.50	0.370	4.77	0.188	2.39	13.630	6.17	0.243	14.72	3.312	3.33	0.131	0.61	0.024	5.6	MW	CG	Z
5.99	0.236	75342	11.00	0.430	4.77	0.188	2.02	11.550	7.26	0.286	14.68	3.303	3.73	0.147	0.61	0.024	6.2	MW	CG	Z
5.99	0.236	75343	12.50	0.490	4.77	0.188	1.75	10.010	8.38	0.330	14.68	3.303	4.11	0.162	0.61	0.024	6.9	MW	CG	Z
5.99	0.236	75344	14.00	0.550	4.77	0.188	1.55	8.840	9.50	0.374	14.69	3.306	4.50	0.177	0.61	0.024	7.5	MW	CG	Z
5.99	0.236	75345	15.50	0.610	4.77	0.188	1.38	7.910	10.62	0.418	14.69	3.306	4.88	0.192	0.61	0.024	8.1	MW	CG	Z
5.99	0.236	75346	17.00	0.670	4.77	0.188	1.25	7.160	11.74	0.462	14.70	3.308	5.26	0.207	0.61	0.024	8.8	MW	CG	Z
5.99	0.236	75347	19.00	0.750	4.77	0.188	1.11	6.360	13.21	0.520	14.70	3.307	5.79	0.228	0.61	0.024	9.6	MW	CG	Z
5.99	0.236	75348	25.00	0.980	4.77	0.188	0.83	4.760	17.65	0.695	14.70	3.308	7.34	0.289	0.61	0.024	12.2	MW	CG	Z
5.99	0.236	75349	27.50	1.080	4.77	0.188	0.75	4.300	19.53	0.769	14.70	3.307	7.98	0.314	0.61	0.024	13.3	MW	CG	Z
5.99	0.236	75350	30.00	1.180	4.77	0.188	0.69	3.930	21.39	0.842	14.71	3.309	8.61	0.339	0.61	0.024	14.4	MW	CG	Z
5.99	0.236	75351	35.00	1.380	4.77	0.188	0.59	3.350	25.10	0.988	14.71	3.310	9.91	0.390	0.61	0.024	16.5	MW	CG	Z
5.99	0.236	75352	40.00	1.580	4.77	0.188	0.51	2.920	28.80	1.134	14.72	3.311	11.20	0.441	0.61	0.024	18.6	MW	CG	Z
5.99	0.236	75353	45.00	1.770	4.77	0.188	0.45	2.580	32.54	1.281	14.69	3.305	12.47	0.491	0.61	0.024	20.8	MW	CG	Z
5.99	0.236	75354	50.00	1.970	4.77	0.188	0.41	2.320	36.25	1.427	14.72	3.311	13.77	0.542	0.61	0.024	22.9	MW	CG	Z
5.99	0.236	75434	6.50	0.260	4.37	0.172	13.91	79.510	2.39	0.094	33.22	7.474	3.33	0.131	0.81	0.032	4.2	MW	CG	Z
5.99	0.236	75435	8.00	0.320	4.37	0.172	10.65	60.870	3.10	0.122	33.00	7.426	3.86	0.152	0.81	0.032	4.8	MW	CG	Z
5.99	0.236	75436	9.50	0.370	4.37	0.172	8.63	49.320	3.84	0.151	33.10	7.447	4.39	0.173	0.81	0.032	5.5	MW	CG	Z
5.99	0.236	75437	11.00	0.430	4.37	0.172	7.25	41.450	4.55	0.179	32.98	7.420	4.93	0.194	0.81	0.032	6.2	MW	CG	Z
5.99	0.236	75438	12.50	0.490	4.37	0.172	6.26	35.740	5.28	0.208	33.04	7.434	5.46</							




Metric Compression Springs

O.D. mm	Century Stock Number	Free Length mm	I.D. mm	Rate		Sugg Max. Defl. mm	Sugg Max. load N	Solid Length mm	Wire Dia.		Total Coils Mat'l	Ends Mat'l	Finish Zinc					
				N/mm	Lbs./In.				mm	Inches								
5.99	0.236	75584	25.00	0.980	3.81	0.150	10.33	59.030	7.16	0.282	73.98	16.646	15.90	0.626	1.09	0.043	14.5	MW CG Z
5.99	0.236	75585	27.50	1.080	3.81	0.150	9.31	53.190	7.95	0.313	73.99	16.648	17.40	0.685	1.09	0.043	15.9	MW CG Z
5.99	0.236	75586	30.00	1.180	3.81	0.150	8.47	48.410	8.74	0.344	74.01	16.653	18.90	0.744	1.09	0.043	17.2	MW CG Z
5.99	0.236	75587	35.00	1.380	3.81	0.150	7.18	41.030	10.31	0.406	74.04	16.658	21.89	0.862	1.09	0.043	20	MW CG Z
5.99	0.236	75588	40.00	1.580	3.81	0.150	6.23	35.600	11.89	0.468	74.05	16.661	24.89	0.980	1.09	0.043	22.7	MW CG Z
5.99	0.236	75589	45.00	1.770	3.81	0.150	5.50	31.440	13.46	0.530	74.06	16.663	27.91	1.099	1.09	0.043	25.4	MW CG Z
5.99	0.236	75590	50.00	1.970	3.81	0.150	4.93	28.150	15.04	0.592	74.07	16.665	30.91	1.217	1.09	0.043	28.2	MW CG Z
5.99	0.236	75591	55.00	2.170	3.81	0.150	4.46	25.490	16.59	0.653	73.98	16.645	33.91	1.335	1.09	0.043	30.9	MW CG Z
5.99	0.236	75592	60.00	2.360	3.81	0.150	4.07	23.280	18.16	0.715	73.98	16.645	36.91	1.453	1.09	0.043	33.7	MW CG Z
5.99	0.236	75593	65.00	2.560	3.81	0.150	3.75	21.430	19.74	0.777	74.00	16.651	39.90	1.571	1.09	0.043	36.4	MW CG Z
5.99	0.236	75259S	6.50	0.256	4.97	0.196	1.63	9.313	3.71	0.146	6.04	1.360	1.98	0.078	0.51	0.020	4	SST CG N
5.99	0.236	75260S	8.00	0.315	4.97	0.196	1.28	7.322	4.72	0.186	6.05	1.362	2.26	0.089	0.51	0.020	4.5	SST CG N
5.99	0.236	75261S	9.50	0.374	4.97	0.196	1.06	6.031	5.74	0.226	6.06	1.363	2.54	0.100	0.51	0.020	5.1	SST CG N
5.99	0.236	75262S	11.00	0.433	4.97	0.196	0.90	5.123	6.76	0.266	6.06	1.363	2.79	0.110	0.51	0.020	5.6	SST CG N
5.99	0.236	75263S	12.50	0.492	4.97	0.196	0.78	4.457	7.77	0.306	6.06	1.364	3.07	0.121	0.51	0.020	6.2	SST CG N
5.99	0.236	75264S	14.00	0.551	4.97	0.196	0.69	3.940	8.79	0.346	6.06	1.363	3.35	0.132	0.51	0.020	6.7	SST CG N
5.99	0.236	75265S	15.50	0.610	4.97	0.196	0.62	3.532	9.80	0.386	6.06	1.363	3.61	0.142	0.51	0.020	7.3	SST CG N
5.99	0.236	75266S	17.00	0.669	4.97	0.196	0.56	3.199	10.82	0.426	6.06	1.363	3.89	0.153	0.51	0.020	7.8	SST CG N
5.99	0.236	75267S	19.00	0.748	4.97	0.196	0.50	2.849	12.17	0.479	6.07	1.365	4.24	0.167	0.51	0.020	8.5	SST CG N
5.99	0.236	75268S	25.00	0.984	4.97	0.196	0.37	2.132	16.26	0.640	6.06	1.364	5.33	0.210	0.51	0.020	10.7	SST CG N
5.99	0.236	75269S	27.50	1.083	4.97	0.196	0.34	1.933	17.93	0.706	6.07	1.365	5.77	0.227	0.51	0.020	11.6	SST CG N
5.99	0.236	75270S	30.00	1.181	4.97	0.196	0.31	1.766	19.61	0.772	6.06	1.363	6.22	0.245	0.51	0.020	12.5	SST CG N
5.99	0.236	75271S	35.00	1.378	4.97	0.196	0.26	1.508	22.99	0.905	6.07	1.365	7.14	0.281	0.51	0.020	14.3	SST CG N
5.99	0.236	75272S	40.00	1.575	4.97	0.196	0.23	1.316	26.31	1.036	6.06	1.363	8.03	0.316	0.51	0.020	16.1	SST CG N
5.99	0.236	75273S	45.00	1.772	4.97	0.196	0.20	1.166	29.72	1.170	6.06	1.364	8.94	0.352	0.51	0.020	18	SST CG N
5.99	0.236	75274S	50.00	1.969	4.97	0.196	0.18	1.050	33.00	1.299	6.06	1.364	9.83	0.387	0.51	0.020	19.7	SST CG N
5.99	0.236	75339S	6.50	0.256	4.77	0.188	3.12	17.785	3.23	0.127	10.04	2.259	2.57	0.101	0.61	0.024	4.3	SST CG N
5.99	0.236	75340S	8.00	0.315	4.77	0.188	2.43	13.861	4.12	0.162	9.98	2.245	2.95	0.116	0.61	0.024	4.9	SST CG N
5.99	0.236	75341S	9.50	0.374	4.77	0.188	1.99	11.354	5.03	0.198	9.99	2.248	3.33	0.131	0.61	0.024	5.6	SST CG N
5.99	0.236	75342S	11.00	0.433	4.77	0.188	1.69	9.621	5.94	0.234	10.00	2.251	3.73	0.147	0.61	0.024	6.2	SST CG N
5.99	0.236	75343S	12.50	0.492	4.77	0.188	1.46	8.338	6.86	0.270	10.00	2.251	4.11	0.162	0.61	0.024	6.9	SST CG N
5.99	0.236	75344S	14.00	0.551	4.77	0.188	1.29	7.364	7.77	0.306	10.01	2.253	4.50	0.177	0.61	0.024	7.5	SST CG N
5.99	0.236	75345S	15.50	0.610	4.77	0.188	1.15	6.589	8.69	0.342	10.01	2.253	4.88	0.192	0.61	0.024	8.1	SST CG N
5.99	0.236	75346S	17.00	0.669	4.77	0.188	1.04	5.964	9.58	0.377	9.99	2.248	5.26	0.207	0.61	0.024	8.8	SST CG N
5.99	0.236	75347S	19.00	0.748	4.77	0.188	0.93	5.298	10.80	0.425	10.01	2.252	5.79	0.228	0.61	0.024	9.6	SST CG N
5.99	0.236	75348S	25.00	0.984	4.77	0.188	0.69	3.965	14.43	0.568	10.01	2.252	7.34	0.289	0.61	0.024	12.2	SST CG N
5.99	0.236	75349S	27.50	1.083	4.77	0.188	0.63	3.582	15.95	0.628	10.00	2.249	7.98	0.314	0.61	0.024	13.3	SST CG N
5.99	0.236	75350S	30.00	1.181	4.77	0.188	0.57	3.274	17.48	0.688	10.01	2.253	8.61	0.339	0.61	0.024	14.4	SST CG N
5.99	0.236	75351S	35.00	1.378	4.77	0.188	0.49	2.791	20.50	0.807	10.01	2.252	9.91	0.390	0.61	0.024	16.5	SST CG N
5.99	0.236	75352S	40.00	1.575	4.77	0.188	0.43	2.432	23.52	0.926	10.01	2.252	11.20	0.441	0.61	0.024	18.6	SST CG N
5.99	0.236	75353S	45.00	1.772	4.77	0.188	0.38	2.149	26.59	1.047	10.00	2.250	12.47	0.491	0.61	0.024	20.8	SST CG N
5.99	0.236	75354S	50.00	1.969	4.77	0.188	0.34	1.933	29.59	1.165	10.01	2.252	13.77	0.542	0.61	0.024	22.9	SST CG N
5.99	0.236	75434S	6.50	0.256	4.37	0.172	11.60	66.232	1.91	0.075	22.08	4.967	3.33	0.131	0.81	0.032	4.2	SST CG N
5.99	0.236	75435S	8.00	0.315	4.37	0.172	8.88	50.705	2.49	0.098	22.08	4.969	3.86	0.152	0.81	0.032	4.8	SST CG N
5.99	0.236	75436S	9.50	0.374	4.37	0.172	7.20	41.084	3.07	0.121	22.09	4.971	4.39	0.173	0.81	0.032	5.5	SST CG N
5.99	0.236	75437S	11.00	0.433	4.37	0.172	6.05	34.528	3.66	0.144	22.10	4.972	4.93	0.194	0.81	0.032	6.2	SST CG N
5.99	0.236	75438S	12.50	0.492	4.37	0.172	5.21	29.771	4.27	0.168	22.23	5.002	5.46	0.215	0.81	0.032	6.8	SST CG N
5.99	0.236	75439S	14.00	0.551	4.37	0.172	4.58	26.173	4.85	0.191	22.22	4.999	5.97	0.235	0.81	0.032	7.5	SST CG N
5.99	0.236	75440S	15.50	0.610	4.37	0.172	4.09	23.349	5.44	0.214	22.21	4.997	6.50	0.256	0.81	0.032	8.2	SST CG N
5.99	0.236	75441S	17.00	0.669	4.37	0.172	3.69	21.075	6.02	0.237	22.20	4.995	7.04	0.277	0.81	0.032	8.8	SST CG N
5.99	0.236	75442S	19.00	0.748	4.37	0.172	3.27	18.651	6.78	0.267	22.13	4.980	7.75	0.305	0.81	0.032	9.7	SST CG N
5.99	0.236	75443S	25.00	0.984	4.37	0.172	2.43	13.869	9.14	0.360	22.19	4.993	9.86	0.388	0.81	0.032	12.4	SST CG N
5.99	0.236	75444S	27.50	1.083	4.37	0.172	2.19	12.528	10.11	0.398	22.16	4.986	10.74	0.423	0.81	0.032	13.5	SST CG N
5.99	0.236	75445S	30.00	1.181	4.37	0.172	2.00	11.429	11.07	0.436	22.15	4.983	11.63	0.458	0.81	0.032	14.6	SST CG N
5.99	0.236	75446S	35.00	1.378	4.37	0.172	1.70	9.713	13.06	0.514	22.19	4.992	13.39	0.527	0.81	0.032	16.8	SST CG N
5.99	0.236	75447S	40.00	1.575	4.37	0.172	1.48	8.455	14.99	0.590	22.17							




Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg. Max. Defl. mm Inches	Sugg. Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils Mat'l	Ends	Finish									
5.99	0.236	75592S	60.00	2.362	3.81	0.150	3.40	19.392	14.83	0.584	50.33	11.325	36.91	1.453	1.09	0.043	33.7	SST	CG	N
5.99	0.236	75593S	65.00	2.559	3.81	0.150	3.13	17.851	16.13	0.635	50.38	11.335	39.90	1.571	1.09	0.043	36.4	SST	CG	N
6.00	0.236	75550	8.50	0.340	4.00	0.158	23.62	134.980	2.49	0.098	58.79	13.228	5.50	0.217	1.00	0.039	5.5	MW	CG	Z
6.00	0.236	75551	12.00	0.470	4.00	0.158	15.03	85.900	3.91	0.154	58.79	13.228	7.50	0.295	1.00	0.039	7.5	MW	CG	Z
6.00	0.236	75552	17.00	0.670	4.00	0.158	9.73	55.580	6.07	0.239	59.04	13.284	10.50	0.413	1.00	0.039	10.5	MW	CG	Z
6.00	0.236	75553	24.00	0.950	4.00	0.158	6.61	37.800	8.92	0.351	58.96	13.266	14.50	0.571	1.00	0.039	14.5	MW	CG	Z
6.00	0.236	75554	34.50	1.360	4.00	0.158	4.47	25.540	13.18	0.519	58.91	13.254	20.50	0.807	1.00	0.039	20.5	MW	CG	Z
6.00	0.236	75550S	8.50	0.335	4.00	0.158	19.70	112.486	2.03	0.080	40.00	8.999	5.50	0.217	1.00	0.039	5.5	SST	CG	N
6.00	0.236	75551S	12.00	0.472	4.00	0.158	12.54	71.582	3.18	0.125	39.77	8.948	7.50	0.295	1.00	0.039	7.5	SST	CG	N
6.00	0.236	75552S	17.00	0.669	4.00	0.158	8.11	46.318	4.93	0.194	39.94	8.986	10.50	0.413	1.00	0.039	10.5	SST	CG	N
6.00	0.236	75553S	24.00	0.945	4.00	0.158	5.52	31.496	7.24	0.285	39.89	8.976	14.50	0.571	1.00	0.039	14.5	SST	CG	N
6.00	0.236	75554S	34.50	1.358	4.00	0.158	3.73	21.281	10.69	0.421	39.82	8.959	20.50	0.807	1.00	0.039	20.5	SST	CG	N
6.00	0.236	75944	7.40	0.291	4.00	0.157	27.00	154.170	2.17	0.085	58.56	13.165	5.00	0.197	1.00	0.039	5	MW	CG	N
6.00	0.236	75945	10.00	0.394	5.20	0.205	0.53	3.030	7.68	0.302	4.07	0.915	2.32	0.091	0.40	0.016	4.8	MW	C	N
6.00	0.236	75946	11.00	0.433	4.00	0.157	16.00	91.360	3.66	0.144	58.58	13.168	7.00	0.276	1.00	0.039	7	MW	CG	N
6.00	0.236	75947	16.00	0.630	4.00	0.157	10.00	57.100	5.86	0.231	58.57	13.167	10.00	0.394	1.00	0.039	10	MW	CG	N
6.00	0.236	75948	20.00	0.787	5.20	0.205	0.24	1.370	16.32	0.643	3.92	0.881	3.68	0.145	0.40	0.016	8.2	MW	C	N
6.00	0.236	75949	25.00	0.984	5.20	0.205	0.19	1.080	20.64	0.813	3.92	0.882	4.36	0.172	0.40	0.016	9.9	MW	C	N
6.00	0.236	75950	40.00	1.575	5.20	0.205	0.11	0.630	33.56	1.321	3.69	0.830	6.44	0.254	0.40	0.016	15.1	MW	C	N
6.20	0.244	75951	10.00	0.394	5.20	0.205	1.10	6.280	7.40	0.291	8.14	1.830	2.60	0.102	0.50	0.020	5.2	MW	CG	N
6.20	0.244	75952	15.00	0.591	5.20	0.205	0.66	3.770	11.40	0.449	7.52	1.691	3.60	0.142	0.50	0.020	7.2	MW	CG	N
6.20	0.244	75953	20.00	0.787	5.20	0.205	0.48	2.740	15.40	0.606	7.39	1.662	4.60	0.181	0.50	0.020	9.2	MW	CG	N
6.20	0.244	75954	25.00	0.984	5.20	0.205	0.37	2.110	19.40	0.764	7.18	1.614	5.60	0.220	0.50	0.020	11.2	MW	CG	N
6.20	0.244	75955	30.00	1.181	5.20	0.205	0.31	1.770	23.45	0.923	7.27	1.634	6.55	0.258	0.50	0.020	13.1	MW	CG	N
6.20	0.244	75956	40.00	1.575	5.20	0.205	0.23	1.310	31.45	1.238	7.23	1.626	8.55	0.337	0.50	0.020	17.1	MW	CG	N
6.20	0.244	75957	50.00	1.969	5.20	0.205	0.18	1.030	39.50	1.555	7.11	1.598	10.50	0.413	0.50	0.020	21	MW	CG	N
6.40	0.252	75958	10.00	0.394	5.20	0.205	1.90	10.850	6.64	0.261	12.62	2.836	3.36	0.132	0.60	0.024	5.6	MW	CG	N
6.40	0.252	75959	15.00	0.591	5.20	0.205	1.20	6.850	10.38	0.409	12.46	2.800	4.62	0.182	0.60	0.024	7.7	MW	CG	N
6.40	0.252	75960	20.00	0.787	5.20	0.205	0.85	4.850	14.00	0.551	11.90	2.675	6.00	0.236	0.60	0.024	10	MW	CG	N
6.40	0.252	75961	25.00	0.984	5.20	0.205	0.67	3.830	17.74	0.698	11.89	2.672	7.26	0.286	0.60	0.024	12.1	MW	CG	N
6.40	0.252	75962	35.00	1.378	5.20	0.205	0.47	2.680	25.10	0.988	11.80	2.652	9.90	0.390	0.60	0.024	16.5	MW	CG	N
6.40	0.252	75963	45.00	1.772	5.20	0.205	0.36	2.060	32.46	1.278	11.69	2.627	12.54	0.494	0.60	0.024	20.9	MW	CG	N
6.40	0.252	75964	55.00	2.165	5.20	0.205	0.29	1.660	39.88	1.570	11.57	2.600	15.12	0.595	0.60	0.024	25.2	MW	CG	N
6.70	0.264	75965	10.00	0.394	5.20	0.205	3.90	22.270	5.57	0.219	21.72	4.884	4.43	0.174	0.75	0.030	5.9	MW	CG	N
6.70	0.264	75966	15.00	0.591	5.20	0.205	2.50	14.280	8.85	0.348	22.13	4.974	6.15	0.242	0.75	0.030	8.2	MW	CG	N
6.70	0.264	75967	20.00	0.787	5.20	0.205	1.80	10.280	12.05	0.474	21.69	4.876	7.95	0.313	0.75	0.030	10.6	MW	CG	N
6.70	0.264	75968	25.00	0.984	5.20	0.205	1.40	7.990	15.32	0.603	21.45	4.822	9.68	0.381	0.75	0.030	12.9	MW	CG	N
6.70	0.264	75969	35.00	1.378	5.20	0.205	0.98	5.600	21.80	0.858	21.36	4.803	13.20	0.520	0.75	0.030	17.6	MW	CG	N
6.70	0.264	75970	45.00	1.772	5.20	0.205	0.79	4.510	29.02	1.143	22.93	5.154	15.98	0.629	0.75	0.030	21.3	MW	CG	N
6.70	0.264	75971	55.00	2.165	5.20	0.205	0.61	3.480	34.75	1.368	21.20	4.766	20.25	0.797	0.75	0.030	27	MW	CG	N
6.80	0.268	75275	13.50	0.530	5.80	0.228	0.74	4.220	10.29	0.405	7.59	1.708	2.75	0.108	0.50	0.020	5.5	MW	CG	Z
6.80	0.268	75276	20.00	0.790	5.80	0.228	0.47	2.680	16.15	0.636	7.59	1.707	3.75	0.148	0.50	0.020	7.5	MW	CG	Z
6.80	0.268	75277	30.00	1.180	5.80	0.228	0.30	1.740	24.74	0.974	7.52	1.692	5.25	0.207	0.50	0.020	10.5	MW	CG	Z
6.80	0.268	75278	44.00	1.730	5.80	0.228	0.21	1.180	36.70	1.445	7.59	1.707	7.25	0.285	0.50	0.020	14.5	MW	CG	Z
6.80	0.268	75279	65.00	2.560	5.80	0.228	0.14	0.800	54.33	2.139	7.59	1.707	10.25	0.404	0.50	0.020	20.5	MW	CG	Z
6.80	0.268	75275S	13.50	0.531	5.80	0.228	0.62	3.515	8.23	0.324	5.06	1.139	2.75	0.108	0.50	0.020	5.5	SST	CG	N
6.80	0.268	75276S	20.00	0.787	5.80	0.228	0.39	2.237	12.93	0.509	5.06	1.139	3.75	0.148	0.50	0.020	7.5	SST	CG	N
6.80	0.268	75277S	30.00	1.181	5.80	0.228	0.25	1.447	19.96	0.786	5.05	1.137	5.25	0.207	0.50	0.020	10.5	SST	CG	N
6.80	0.268	75278S	44.00	1.732	5.80	0.228	0.17	0.984	29.39	1.157	5.06	1.138	7.25	0.285	0.50	0.020	14.5	SST	CG	N
6.80	0.268	75279S	65.00	2.559	5.80	0.228	0.12	0.665	43.46	1.711	5.06	1.138	10.25	0.404	0.50	0.020	20.5	SST	CG	N
6.80	0.268	75972	14.00	0.551	5.80	0.228	0.85	4.850	8.94	0.352	7.60	1.708	2.50	0.098	0.50	0.020	5	MW	CG	N
6.93	0.273	75365	11.50	0.450	5.67	0.223	1.86	10.630	7.70	0.303	14.32	3.221	3.47	0.136	0.63	0.025	5.5	MW	CG	Z
6.93	0.273	75366	17.00	0.670	5.67	0.223	1.18	6.760	12.09	0.476	14.31	3.220	4.73	0.186	0.63	0.025	7.5	MW	CG	Z
6.93	0.273	75367	25.50	1.000	5.67	0.223	0.77	4.380	18.67	0.735	14.30	3.217	6.62	0.260	0.63	0.025	10.5	MW	CG	Z
6.93	0.273	75368	36.50	1.440	5.67	0.223	0.52	2.980	27.36	1.077										




Metric Compression Springs

O.D. mm	Century Stock Number	Free Length mm	Inches	I.D. mm	Inches	Rate		Sugg Max. Defl. mm	Sugg Max. load N	Solid Length mm	Wire Dia. mm	Total Coils	Ends Mat'l	F n sh			
						N/mm	Lbs./In.	Inches	Lbs.	Inches	mm	mm					
7.10	0.280	75977	9.30	0.366	5.50	0.217	5.60	31.980	4.87	0.192	27.27	6.131	4.00	0.157	0.80	0.031	5 MW CG N
7.10	0.280	75978	11.00	0.433	5.50	0.217	4.80	27.410	5.68	0.224	27.27	6.131	4.40	0.173	0.80	0.031	5.5 MW CG N
7.10	0.280	75979	14.00	0.551	5.50	0.217	3.30	18.840	8.27	0.325	27.28	6.132	5.60	0.220	0.80	0.031	7 MW CG N
7.10	0.280	75980	16.00	0.630	5.50	0.217	3.00	17.130	9.09	0.358	27.27	6.131	6.00	0.236	0.80	0.031	7.5 MW CG N
7.10	0.280	75981	21.00	0.827	5.50	0.217	2.10	11.990	12.99	0.511	27.28	6.132	8.00	0.315	0.80	0.031	10 MW CG N
7.10	0.280	75982	23.00	0.906	5.50	0.217	2.00	11.420	13.64	0.537	27.27	6.131	8.40	0.331	0.80	0.031	10.5 MW CG N
7.10	0.280	75983	30.00	1.181	5.50	0.217	1.40	7.990	18.80	0.740	26.32	5.917	11.20	0.441	0.80	0.031	14 MW CG N
7.10	0.280	75984	33.00	1.299	5.50	0.217	1.30	7.420	20.98	0.826	27.27	6.131	11.60	0.457	0.80	0.031	14.5 MW CG N
7.10	0.280	75985	44.00	1.732	5.50	0.217	0.93	5.310	28.00	1.102	26.04	5.854	16.00	0.630	0.80	0.031	20 MW CG N
7.10	0.280	75986	48.00	1.890	5.50	0.217	0.90	5.140	30.30	1.193	27.27	6.131	16.40	0.646	0.80	0.031	20.5 MW CG N
7.20	0.283	75987	10.00	0.394	5.20	0.205	10.66	60.870	4.10	0.161	43.71	9.826	5.90	0.232	1.00	0.039	5.9 MW CG N
7.20	0.283	75988	15.00	0.591	5.20	0.205	6.80	38.830	6.70	0.264	45.56	10.242	8.30	0.327	1.00	0.039	8.3 MW CG N
7.20	0.283	75989	25.00	0.984	5.20	0.205	3.80	21.700	11.80	0.465	44.84	10.080	13.20	0.520	1.00	0.039	13.2 MW CG N
7.20	0.283	75990	35.00	1.378	5.20	0.205	2.70	15.420	17.00	0.669	45.90	10.319	18.00	0.709	1.00	0.039	18 MW CG N
7.20	0.283	75991	45.00	1.772	5.20	0.205	2.00	11.420	22.00	0.866	44.00	9.892	23.00	0.906	1.00	0.039	23 MW CG N
7.20	0.283	75992	55.00	2.165	5.20	0.205	1.70	9.710	27.20	1.071	46.24	10.395	27.80	1.094	1.00	0.039	27.8 MW CG N
7.20	0.283	75993	65.00	2.559	5.20	0.205	1.40	7.990	32.50	1.280	45.50	10.229	32.50	1.280	1.00	0.039	32.5 MW CG N
7.25	0.285	75994	10.00	0.394	6.25	0.246	0.90	5.140	7.85	0.309	7.07	1.588	2.15	0.085	0.50	0.020	4.3 MW CG N
7.25	0.285	75995	15.00	0.591	6.25	0.246	0.56	3.200	12.15	0.478	6.80	1.530	2.85	0.112	0.50	0.020	5.7 MW CG N
7.25	0.285	75996	20.00	0.787	6.25	0.246	0.39	2.230	16.35	0.644	6.38	1.434	3.65	0.144	0.50	0.020	7.3 MW CG N
7.25	0.285	75997	25.00	0.984	6.25	0.246	0.31	1.770	20.65	0.813	6.40	1.439	4.35	0.171	0.50	0.020	8.7 MW CG N
7.25	0.285	75998	30.00	1.181	6.25	0.246	0.25	1.430	24.90	0.980	6.23	1.399	5.10	0.201	0.50	0.020	10.2 MW CG N
7.25	0.285	75999	35.00	1.378	6.25	0.246	0.21	1.200	29.15	1.148	6.12	1.376	5.85	0.230	0.50	0.020	11.7 MW CG N
7.25	0.285	76000	45.00	1.772	6.25	0.246	0.16	0.910	37.70	1.484	6.03	1.356	7.30	0.287	0.50	0.020	14.6 MW CG N
7.30	0.287	75555	10.00	0.390	5.30	0.209	11.81	67.480	4.19	0.165	49.48	11.134	5.50	0.217	1.00	0.039	5.5 MW CG Z
7.30	0.287	75556	14.50	0.570	5.30	0.209	7.52	42.940	6.58	0.259	49.43	11.122	7.50	0.295	1.00	0.039	7.5 MW CG Z
7.30	0.287	75557	21.50	0.850	5.30	0.209	4.86	27.790	10.19	0.401	49.52	11.142	10.50	0.413	1.00	0.039	10.5 MW CG Z
7.30	0.287	75558	30.50	1.200	5.30	0.209	3.31	18.890	14.96	0.589	49.46	11.129	14.50	0.571	1.00	0.039	14.5 MW CG Z
7.30	0.287	75559	43.50	1.710	5.30	0.209	2.23	12.770	22.15	0.872	49.48	11.132	20.50	0.807	1.00	0.039	20.5 MW CG Z
7.30	0.287	75555S	10.00	0.394	5.30	0.209	9.85	56.232	3.40	0.134	33.49	7.535	5.50	0.217	1.00	0.039	5.5 SST CG N
7.30	0.287	75556S	14.50	0.571	5.30	0.209	6.27	35.784	5.33	0.210	33.40	7.515	7.50	0.295	1.00	0.039	7.5 SST CG N
7.30	0.287	75557S	21.50	0.846	5.30	0.209	4.06	23.155	8.26	0.325	33.44	7.525	10.50	0.413	1.00	0.039	10.5 SST CG N
7.30	0.287	75558S	30.50	1.201	5.30	0.209	2.76	15.745	12.14	0.478	33.45	7.526	14.50	0.571	1.00	0.039	14.5 SST CG N
7.30	0.287	75559S	43.50	1.713	5.30	0.209	1.86	10.639	17.96	0.707	33.43	7.522	20.50	0.807	1.00	0.039	20.5 SST CG N
7.30	0.287	76001	9.00	0.354	5.30	0.209	14.00	79.940	3.51	0.138	49.17	11.053	5.00	0.197	1.00	0.039	5 MW CG N
7.30	0.287	76002	13.00	0.512	5.30	0.209	8.10	46.250	6.00	0.236	48.60	10.926	7.00	0.276	1.00	0.039	7 MW CG N
7.30	0.287	76003	20.00	0.787	5.30	0.209	5.10	29.120	9.64	0.380	49.16	11.053	10.00	0.394	1.00	0.039	10 MW CG N
7.30	0.287	76004	28.00	1.102	5.30	0.209	3.40	19.410	14.00	0.551	47.60	10.701	14.00	0.551	1.00	0.039	14 MW CG N
7.30	0.287	76005	41.00	1.614	5.30	0.209	2.30	13.130	21.00	0.827	48.30	10.858	20.00	0.787	1.00	0.039	20 MW CG N
7.45	0.293	76006	10.00	0.394	6.25	0.246	1.60	9.140	7.24	0.285	11.58	2.604	2.76	0.109	0.60	0.024	4.6 MW CG N
7.45	0.293	76007	15.00	0.591	6.25	0.246	0.96	5.480	11.22	0.442	10.77	2.421	3.78	0.149	0.60	0.024	6.3 MW CG N
7.45	0.293	76008	20.00	0.787	6.25	0.246	0.68	3.880	15.20	0.598	10.34	2.324	4.80	0.189	0.60	0.024	8 MW CG N
7.45	0.293	76009	25.00	0.984	6.25	0.246	0.54	3.080	19.24	0.757	10.39	2.336	5.76	0.227	0.60	0.024	9.6 MW CG N
7.45	0.293	76010	30.00	1.181	6.25	0.246	0.44	2.510	23.22	0.914	10.22	2.297	6.78	0.267	0.60	0.024	11.3 MW CG N
7.45	0.293	76011	40.00	1.575	6.25	0.246	0.33	1.880	31.24	1.230	10.31	2.318	8.76	0.345	0.60	0.024	14.6 MW CG N
7.45	0.293	76012	50.00	1.969	6.25	0.246	0.26	1.480	39.20	1.543	10.19	2.291	10.80	0.425	0.60	0.024	18 MW CG N
7.49	0.295	75293	9.50	0.370	6.37	0.251	1.47	8.390	6.50	0.256	9.55	2.148	2.16	0.085	0.56	0.022	3.9 MW CG Z
7.49	0.295	75294	11.00	0.430	6.37	0.251	1.24	7.110	7.67	0.302	9.54	2.147	2.34	0.092	0.56	0.022	4.3 MW CG Z
7.49	0.295	75295	12.50	0.490	6.37	0.251	1.08	6.180	8.81	0.347	9.53	2.144	2.54	0.100	0.56	0.022	4.6 MW CG Z
7.49	0.295	75296	14.00	0.550	6.37	0.251	0.96	5.460	9.98	0.393	9.54	2.146	2.72	0.107	0.56	0.022	5 MW CG Z
7.49	0.295	75297	15.50	0.610	6.37	0.251	0.86	4.890	11.15	0.439	9.54	2.147	2.92	0.115	0.56	0.022	5.3 MW CG Z
7.49	0.295	75298	17.00	0.670	6.37	0.251	0.78	4.430	12.32	0.485	9.55	2.149	3.10	0.122	0.56	0.022	5.7 MW CG Z
7.49	0.295	75299	19.00	0.750	6.37	0.251	0.69	3.940	13.84	0.545	9.54	2.147	3.35	0.132	0.56	0.022	6.1 MW CG Z
7.49	0.295	75300	21.00	0.830	6.37	0.251	0.62	3.540	15.39	0.606	9.53	2.145	3.61	0.142	0.56	0.022	6.6 MW CG Z
7.49	0.295	75301	23.00	0.910	6.37	0.251	0.56	3.220	16.94	0.667	9.55	2.148	3.86	0.152	0.56	0.022	7.1 MW CG Z
7.49	0.295	75302	25.00	0.980	6.37	0.251	0.52	2.950	18.49	0.728	9.55	2.148	4.11	0.162	0.56	0.022	7.5 MW CG Z
7.49	0.295	75303	27.50	1.080	6.37	0.251	0.47	2.670	20.42	0.804	9.54	2.147	4.42	0.174	0.56	0.022	8.1 MW CG Z
7.49	0.295	75304	30.00	1.180	6.37	0.251	0.43	2.440	22.35	0.880							




Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Mat'l	Ends	Finish						
7.49	0.295	75385	27.50	1.080	6.17	0.243	0.85	4.870	17.78	0.700	15.15	3.409	5.66	0.223	0.66	0.026	8.8	MW CG Z
7.49	0.295	75386	30.00	1.180	6.17	0.243	0.78	4.450	19.46	0.766	15.15	3.409	6.10	0.240	0.66	0.026	9.4	MW CG Z
7.49	0.295	75387	35.00	1.380	6.17	0.243	0.66	3.790	22.86	0.900	15.16	3.411	6.93	0.273	0.66	0.026	10.7	MW CG Z
7.49	0.295	75388	40.00	1.580	6.17	0.243	0.58	3.300	26.24	1.033	15.15	3.409	7.75	0.305	0.66	0.026	12	MW CG Z
7.49	0.295	75389	45.00	1.770	6.17	0.243	0.51	2.920	29.67	1.168	15.16	3.411	8.59	0.338	0.66	0.026	13.3	MW CG Z
7.49	0.295	75390	50.00	1.970	6.17	0.243	0.46	2.620	33.07	1.302	15.16	3.411	9.42	0.371	0.66	0.026	14.6	MW CG Z
7.49	0.295	75391	55.00	2.170	6.17	0.243	0.42	2.380	36.40	1.433	15.16	3.411	10.26	0.404	0.66	0.026	15.8	MW CG Z
7.49	0.295	75392	60.00	2.360	6.17	0.243	0.38	2.180	39.73	1.564	15.16	3.410	11.10	0.437	0.66	0.026	17.1	MW CG Z
7.49	0.295	75393	65.00	2.560	6.17	0.243	0.35	2.000	43.31	1.705	15.16	3.410	11.94	0.470	0.66	0.026	18.5	MW CG Z
7.49	0.295	75455	9.50	0.370	5.87	0.231	5.64	32.240	4.78	0.188	26.94	6.061	3.61	0.142	0.81	0.032	4.5	MW CG Z
7.49	0.295	75456	11.00	0.430	5.87	0.231	4.74	27.100	5.66	0.223	26.86	6.043	3.96	0.156	0.81	0.032	5	MW CG Z
7.49	0.295	75457	12.50	0.490	5.87	0.231	4.09	23.370	6.58	0.259	26.90	6.053	4.34	0.171	0.81	0.032	5.5	MW CG Z
7.49	0.295	75458	14.00	0.550	5.87	0.231	3.60	20.540	7.47	0.294	26.84	6.039	4.72	0.186	0.81	0.032	5.9	MW CG Z
7.49	0.295	75459	15.50	0.610	5.87	0.231	3.21	18.320	8.38	0.330	26.87	6.046	5.11	0.201	0.81	0.032	6.4	MW CG Z
7.49	0.295	75460	17.00	0.670	5.87	0.231	2.90	16.540	9.30	0.366	26.91	6.054	5.49	0.216	0.81	0.032	6.9	MW CG Z
7.49	0.295	75461	19.00	0.750	5.87	0.231	2.56	14.640	10.49	0.413	26.87	6.046	5.99	0.236	0.81	0.032	7.5	MW CG Z
7.49	0.295	75462	21.00	0.830	5.87	0.231	2.30	13.130	11.71	0.461	26.90	6.053	6.50	0.256	0.81	0.032	8.2	MW CG Z
7.49	0.295	75463	23.00	0.910	5.87	0.231	2.08	11.900	12.90	0.508	26.87	6.045	7.01	0.276	0.81	0.032	8.8	MW CG Z
7.49	0.295	75464	25.00	0.980	5.87	0.231	1.91	10.890	14.10	0.555	26.86	6.044	7.52	0.296	0.81	0.032	9.4	MW CG Z
7.49	0.295	75465	27.50	1.080	5.87	0.231	1.72	9.830	15.62	0.615	26.87	6.045	8.13	0.320	0.81	0.032	10.2	MW CG Z
7.49	0.295	75466	30.00	1.180	5.87	0.231	1.57	8.970	17.12	0.674	26.87	6.046	8.76	0.345	0.81	0.032	11	MW CG Z
7.49	0.295	75467	35.00	1.380	5.87	0.231	1.34	7.630	20.14	0.793	26.89	6.051	10.03	0.395	0.81	0.032	12.6	MW CG Z
7.49	0.295	75468	40.00	1.580	5.87	0.231	1.16	6.630	23.17	0.912	26.88	6.047	11.30	0.445	0.81	0.032	14.2	MW CG Z
7.49	0.295	75469	45.00	1.770	5.87	0.231	1.03	5.870	26.16	1.030	26.87	6.046	12.55	0.494	0.81	0.032	15.8	MW CG Z
7.49	0.295	75470	50.00	1.970	5.87	0.231	0.92	5.260	29.21	1.150	26.88	6.049	13.82	0.544	0.81	0.032	17.4	MW CG Z
7.49	0.295	75471	55.00	2.170	5.87	0.231	0.84	4.770	32.21	1.268	26.88	6.048	15.09	0.594	0.81	0.032	18.9	MW CG Z
7.49	0.295	75472	60.00	2.360	5.87	0.231	0.76	4.360	35.23	1.387	26.88	6.047	16.36	0.644	0.81	0.032	20.5	MW CG Z
7.49	0.295	75473	65.00	2.560	5.87	0.231	0.70	4.020	38.23	1.505	26.89	6.050	17.60	0.693	0.81	0.032	22.1	MW CG Z
7.49	0.295	75498	9.50	0.370	5.61	0.221	10.83	61.910	3.76	0.148	40.72	9.163	4.52	0.178	0.94	0.037	4.8	MW CG Z
7.49	0.295	75499	11.00	0.430	5.61	0.221	9.05	51.710	4.50	0.177	40.68	9.153	5.05	0.199	0.94	0.037	5.3	MW CG Z
7.49	0.295	75500	12.50	0.490	5.61	0.221	7.77	44.390	5.23	0.206	40.64	9.144	5.56	0.219	0.94	0.037	5.9	MW CG Z
7.49	0.295	75501	14.00	0.550	5.61	0.221	6.81	38.890	5.97	0.235	40.62	9.139	6.07	0.239	0.94	0.037	6.4	MW CG Z
7.49	0.295	75502	15.50	0.610	5.61	0.221	6.06	34.600	6.71	0.264	40.60	9.134	6.60	0.260	0.94	0.037	7	MW CG Z
7.49	0.295	75503	17.00	0.670	5.61	0.221	5.45	31.160	7.44	0.293	40.58	9.130	7.11	0.280	0.94	0.037	7.5	MW CG Z
7.49	0.295	75504	19.00	0.750	5.61	0.221	4.82	27.520	8.43	0.332	40.61	9.137	7.80	0.307	0.94	0.037	8.2	MW CG Z
7.49	0.295	75505	21.00	0.830	5.61	0.221	4.31	24.640	9.42	0.371	40.63	9.141	8.51	0.335	0.94	0.037	9	MW CG Z
7.49	0.295	75506	23.00	0.910	5.61	0.221	3.90	22.300	10.41	0.410	40.64	9.143	9.19	0.362	0.94	0.037	9.7	MW CG Z
7.49	0.295	75507	25.00	0.980	5.61	0.221	3.57	20.370	11.41	0.449	40.65	9.146	9.88	0.389	0.94	0.037	10.4	MW CG Z
7.49	0.295	75508	27.50	1.080	5.61	0.221	3.22	18.380	12.62	0.497	40.60	9.135	10.74	0.423	0.94	0.037	11.3	MW CG Z
7.49	0.295	75509	30.00	1.180	5.61	0.221	2.93	16.750	13.87	0.546	40.65	9.146	11.61	0.457	0.94	0.037	12.3	MW CG Z
7.49	0.295	75510	35.00	1.380	5.61	0.221	2.49	14.220	16.33	0.643	40.64	9.143	13.34	0.525	0.94	0.037	14.1	MW CG Z
7.49	0.295	75511	40.00	1.580	5.61	0.221	2.16	12.350	18.80	0.740	40.62	9.139	15.06	0.593	0.94	0.037	15.9	MW CG Z
7.49	0.295	75512	45.00	1.770	5.61	0.221	1.91	10.920	21.26	0.837	40.62	9.140	16.79	0.661	0.94	0.037	17.7	MW CG Z
7.49	0.295	75513	50.00	1.970	5.61	0.221	1.71	9.780	23.75	0.935	40.64	9.144	18.52	0.729	0.94	0.037	19.6	MW CG Z
7.49	0.295	75514	55.00	2.170	5.61	0.221	1.55	8.860	26.21	1.032	40.64	9.144	20.24	0.797	0.94	0.037	21.4	MW CG Z
7.49	0.295	75515	60.00	2.360	5.61	0.221	1.42	8.100	28.68	1.129	40.64	9.145	21.97	0.865	0.94	0.037	23.2	MW CG Z
7.49	0.295	75516	65.00	2.560	5.61	0.221	1.31	7.460	31.14	1.226	40.65	9.146	23.70	0.933	0.94	0.037	25	MW CG Z
7.49	0.295	75293S	9.50	0.374	6.37	0.251	1.22	6.989	5.21	0.205	6.37	1.433	2.16	0.085	0.56	0.022	3.9	SST CG N
7.49	0.295	75294S	11.00	0.433	6.37	0.251	1.04	5.923	6.15	0.242	6.37	1.433	2.34	0.092	0.56	0.022	4.3	SST CG N
7.49	0.295	75295S	12.50	0.492	6.37	0.251	0.90	5.148	7.06	0.278	6.36	1.431	2.54	0.100	0.56	0.022	4.6	SST CG N
7.49	0.295	75296S	14.00	0.551	6.37	0.251	0.80	4.548	8.00	0.315	6.37	1.433	2.72	0.107	0.56	0.022	5	SST CG N
7.49	0.295	75297S	15.50	0.610	6.37	0.251	0.71	4.073	8.94	0.352	6.37	1.434	2.92	0.115	0.56	0.022	5.3	SST CG N
7.49	0.295	75298S	17.00	0.669	6.37	0.251	0.65	3.690	9.86	0.388	6.36	1.432	3.10	0.122	0.56	0.022	5.7	SST CG N
7.49	0.295	75299S	19.00	0.748	6.37	0.251	0.58	3.282	11.10	0.437	6.37	1.434	3.35	0.132	0.56	0.022	6.1	SST CG N
7.49	0.295	75300S	21.00	0.827	6.37	0.251	0.52	2.949	12.34	0.486	6.37	1.433	3.61	0.142	0.56	0.022	6.6	SST CG N
7.49	0.295	75301S	23.00	0.906	6.37	0.251	0.47	2.682	13.56	0.534	6.36	1.432	3.86	0.152	0.56	0.022	7.1	SST CG N
7.49	0.295	75302S	25.00	0.984	6.37	0.251	0.43	2.457	14.81	0.583	6.36	1.432	4.11	0.162	0.56	0.022	7.5	SST CG N
7.49	0.295	75303S	27.50	1.083	6.37	0.251												




Metric Compression Springs

O.D. mm	Century Stock Number	Free Length mm	Free Length Inches	I.D. mm	I.D. Inches	Rate N/mm	Rate Lbs./In.	Sugg Max. Defl. mm	Sugg Max. Defl. Inches	Sugg Max. load N	Sugg Max. load Lbs.	Solid Length mm	Solid Length Inches	Wire Dia. mm	Wire Dia. Inches	Total Coils	Mat'l	Ends	F n sh	
7.49	0.295	75384S	25.00	0.984	6.17	0.243	0.79	4.490	12.95	0.510	10.18	2.290	5.26	0.207	0.66	0.026	8.1	SST	CG	N
7.49	0.295	75385S	27.50	1.083	6.17	0.243	0.71	4.057	14.33	0.564	10.17	2.288	5.66	0.223	0.66	0.026	8.8	SST	CG	N
7.49	0.295	75386S	30.00	1.181	6.17	0.243	0.65	3.707	15.70	0.618	10.18	2.291	6.10	0.240	0.66	0.026	9.4	SST	CG	N
7.49	0.295	75387S	35.00	1.378	6.17	0.243	0.55	3.157	18.42	0.725	10.17	2.289	6.93	0.273	0.66	0.026	10.7	SST	CG	N
7.49	0.295	75388S	40.00	1.575	6.17	0.243	0.48	2.749	21.16	0.833	10.18	2.290	7.75	0.305	0.66	0.026	12	SST	CG	N
7.49	0.295	75389S	45.00	1.772	6.17	0.243	0.43	2.432	23.93	0.942	10.18	2.291	8.59	0.338	0.66	0.026	13.3	SST	CG	N
7.49	0.295	75390S	50.00	1.969	6.17	0.243	0.38	2.182	26.65	1.049	10.17	2.289	9.42	0.371	0.66	0.026	14.6	SST	CG	N
7.49	0.295	75391S	55.00	2.165	6.17	0.243	0.35	1.983	29.34	1.155	10.18	2.290	10.26	0.404	0.66	0.026	15.8	SST	CG	N
7.49	0.295	75392S	60.00	2.362	6.17	0.243	0.32	1.816	32.03	1.261	10.18	2.290	11.10	0.437	0.66	0.026	17.1	SST	CG	N
7.49	0.295	75393S	65.00	2.559	6.17	0.243	0.29	1.666	34.93	1.375	10.18	2.291	11.94	0.470	0.66	0.026	18.5	SST	CG	N
7.49	0.295	75455S	9.50	0.374	5.87	0.231	4.70	26.856	3.84	0.151	18.02	4.055	3.61	0.142	0.81	0.032	4.5	SST	CG	N
7.49	0.295	75456S	11.00	0.433	5.87	0.231	3.95	22.574	4.57	0.180	18.06	4.063	3.96	0.156	0.81	0.032	5	SST	CG	N
7.49	0.295	75457S	12.50	0.492	5.87	0.231	3.41	19.467	5.28	0.208	18.00	4.049	4.34	0.171	0.81	0.032	5.5	SST	CG	N
7.49	0.295	75458S	14.00	0.551	5.87	0.231	3.00	17.110	6.02	0.237	18.02	4.055	4.72	0.186	0.81	0.032	5.9	SST	CG	N
7.49	0.295	75459S	15.50	0.610	5.87	0.231	2.67	15.261	6.76	0.266	18.04	4.059	5.11	0.201	0.81	0.032	6.4	SST	CG	N
7.49	0.295	75460S	17.00	0.669	5.87	0.231	2.41	13.778	7.47	0.294	18.00	4.051	5.49	0.216	0.81	0.032	6.9	SST	CG	N
7.49	0.295	75461S	19.00	0.748	5.87	0.231	2.14	12.195	8.46	0.333	18.05	4.061	5.99	0.236	0.81	0.032	7.5	SST	CG	N
7.49	0.295	75462S	21.00	0.827	5.87	0.231	1.92	10.937	9.42	0.371	18.04	4.058	6.50	0.256	0.81	0.032	8.2	SST	CG	N
7.49	0.295	75463S	23.00	0.906	5.87	0.231	1.74	9.913	10.39	0.409	18.02	4.054	7.01	0.276	0.81	0.032	8.8	SST	CG	N
7.49	0.295	75464S	25.00	0.984	5.87	0.231	1.59	9.071	11.35	0.447	18.02	4.055	7.52	0.296	0.81	0.032	9.4	SST	CG	N
7.49	0.295	75465S	27.50	1.083	5.87	0.231	1.43	8.188	12.57	0.495	18.01	4.053	8.13	0.320	0.81	0.032	10.2	SST	CG	N
7.49	0.295	75466S	30.00	1.181	5.87	0.231	1.31	7.472	13.79	0.543	18.03	4.057	8.76	0.345	0.81	0.032	11	SST	CG	N
7.49	0.295	75467S	35.00	1.378	5.87	0.231	1.11	6.356	16.21	0.638	18.02	4.055	10.03	0.395	0.81	0.032	12.6	SST	CG	N
7.49	0.295	75468S	40.00	1.575	5.87	0.231	0.97	5.523	18.67	0.735	18.04	4.059	11.30	0.445	0.81	0.032	14.2	SST	CG	N
7.49	0.295	75469S	45.00	1.772	5.87	0.231	0.86	4.890	21.08	0.830	18.04	4.059	12.55	0.494	0.81	0.032	15.8	SST	CG	N
7.49	0.295	75470S	50.00	1.969	5.87	0.231	0.77	4.382	23.52	0.926	18.04	4.058	13.82	0.544	0.81	0.032	17.4	SST	CG	N
7.49	0.295	75471S	55.00	2.165	5.87	0.231	0.70	3.973	25.93	1.021	18.03	4.056	15.09	0.594	0.81	0.032	18.9	SST	CG	N
7.49	0.295	75472S	60.00	2.362	5.87	0.231	0.64	3.632	28.37	1.117	18.03	4.057	16.36	0.644	0.81	0.032	20.5	SST	CG	N
7.49	0.295	75473S	65.00	2.559	5.87	0.231	0.59	3.349	30.76	1.211	18.03	4.056	17.60	0.693	0.81	0.032	22.1	SST	CG	N
7.49	0.295	75498S	9.50	0.374	5.61	0.221	9.03	51.571	3.07	0.121	27.73	6.240	4.52	0.178	0.94	0.037	4.8	SST	CG	N
7.49	0.295	75499S	11.00	0.433	5.61	0.221	7.54	43.074	3.68	0.145	27.76	6.246	5.05	0.199	0.94	0.037	5.3	SST	CG	N
7.49	0.295	75500S	12.50	0.492	5.61	0.221	6.48	36.977	4.29	0.169	27.77	6.249	5.56	0.219	0.94	0.037	5.9	SST	CG	N
7.49	0.295	75501S	14.00	0.551	5.61	0.221	5.67	32.395	4.88	0.192	27.64	6.220	6.07	0.239	0.94	0.037	6.4	SST	CG	N
7.49	0.295	75502S	15.50	0.610	5.61	0.221	5.05	28.822	5.49	0.216	27.67	6.226	6.60	0.260	0.94	0.037	7	SST	CG	N
7.49	0.295	75503S	17.00	0.669	5.61	0.221	4.55	25.956	6.10	0.240	27.68	6.229	7.11	0.280	0.94	0.037	7.5	SST	CG	N
7.49	0.295	75504S	19.00	0.748	5.61	0.221	4.02	22.924	6.91	0.272	27.71	6.235	7.80	0.307	0.94	0.037	8.2	SST	CG	N
7.49	0.295	75505S	21.00	0.827	5.61	0.221	3.60	20.525	7.72	0.304	27.73	6.240	8.51	0.335	0.94	0.037	9	SST	CG	N
7.49	0.295	75506S	23.00	0.906	5.61	0.221	3.25	18.576	8.53	0.336	27.74	6.242	9.19	0.362	0.94	0.037	9.7	SST	CG	N
7.49	0.295	75507S	25.00	0.984	5.61	0.221	2.97	16.968	9.32	0.367	27.68	6.227	9.88	0.389	0.94	0.037	10.4	SST	CG	N
7.49	0.295	75508S	27.50	1.083	5.61	0.221	2.68	15.311	10.34	0.407	27.70	6.232	10.74	0.423	0.94	0.037	11.3	SST	CG	N
7.49	0.295	75509S	30.00	1.181	5.61	0.221	2.44	13.953	11.35	0.447	27.72	6.237	11.61	0.457	0.94	0.037	12.3	SST	CG	N
7.49	0.295	75510S	35.00	1.378	5.61	0.221	2.07	11.845	13.36	0.526	27.69	6.230	13.34	0.525	0.94	0.037	14.1	SST	CG	N
7.49	0.295	75511S	40.00	1.575	5.61	0.221	1.80	10.288	15.39	0.606	27.71	6.235	15.06	0.593	0.94	0.037	15.9	SST	CG	N
7.49	0.295	75512S	45.00	1.772	5.61	0.221	1.59	9.096	17.40	0.685	27.69	6.231	16.79	0.661	0.94	0.037	17.7	SST	CG	N
7.49	0.295	75513S	50.00	1.969	5.61	0.221	1.43	8.147	19.43	0.765	27.70	6.232	18.52	0.729	0.94	0.037	19.6	SST	CG	N
7.49	0.295	75514S	55.00	2.165	5.61	0.221	1.29	7.380	21.46	0.845	27.72	6.236	20.24	0.797	0.94	0.037	21.4	SST	CG	N
7.49	0.295	75515S	60.00	2.362	5.61	0.221	1.18	6.747	23.47	0.924	27.71	6.234	21.97	0.865	0.94	0.037	23.2	SST	CG	N
7.49	0.295	75516S	65.00	2.559	5.61	0.221	1.09	6.214	25.48	1.003	27.70	6.233	23.70	0.933	0.94	0.037	25	SST	CG	N
7.55	0.297	75643S	12.00	0.470	5.05	0.199	28.83	164.740	3.05	0.120	87.86	19.769	6.88	0.271	1.25	0.049	5.5	MW	CG	Z
7.55	0.297	75644S	17.00	0.670	5.05	0.199	18.35	104.840	4.80	0.189	88.06	19.814	9.38	0.369	1.25	0.049	7.5	MW	CG	Z
7.55	0.297	75645S	25.00	0.980	5.05	0.199	11.76	67.200	7.49	0.295	88.10	19.823	13.13	0.517	1.25	0.049	10.5	MW	CG	Z
7.55	0.297	75646S	35.50	1.400	5.05	0.199	8.09	46.200	10.90	0.429	88.08	19.819	18.13	0.714	1.25	0.049	14.5	MW	CG	Z
7.55	0.297	75647S	51.50	2.030	5.05	0.199	5.45	31.170	16.15	0.636	88.10	19.823	25.63	1.009	1.25	0.049	20.5	MW	CG	Z
7.55	0.297	75648S	12.00	0.472	5.05	0.199	24.04	137.286	2.49	0.098	59.8									




Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg. Max. Defl. mm Inches	Sugg. Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils Mat'l	Ends E n d s	Finish F in sh							
8.25	0.325	76030	25.00	0.984	7.25	0.285	0.27	1.540	21.50	0.846	5.81	1.305	3.50	0.138	0.50	0.020	7	MW CG N
8.25	0.325	76031	25.00	0.984	6.25	0.246	2.90	16.560	13.80	0.543	40.02	8.997	11.20	0.441	1.00	0.039	11.2	MW CG N
8.25	0.325	76032	30.00	1.181	7.25	0.285	0.22	1.260	25.90	1.020	5.70	1.281	4.10	0.161	0.50	0.020	8.2	MW CG N
8.25	0.325	76033	30.00	1.181	6.25	0.246	2.40	13.700	16.80	0.661	40.32	9.064	13.20	0.520	1.00	0.039	13.2	MW CG N
8.25	0.325	76034	40.00	1.575	7.25	0.285	0.16	0.910	34.75	1.368	5.56	1.250	5.25	0.207	0.50	0.020	10.5	MW CG N
8.25	0.325	76035	40.00	1.575	6.25	0.246	1.70	9.710	22.70	0.894	38.59	8.675	17.30	0.681	1.00	0.039	17.3	MW CG N
8.25	0.325	76036	50.00	1.969	6.25	0.246	1.40	7.990	28.70	1.130	40.18	9.033	21.30	0.839	1.00	0.039	21.3	MW CG N
8.25	0.325	76037	60.00	2.362	6.25	0.246	1.10	6.280	34.70	1.366	38.17	8.581	25.30	0.996	1.00	0.039	25.3	MW CG N
8.25	0.325	76038	70.00	2.756	6.25	0.246	0.97	5.540	40.50	1.594	39.29	8.832	29.50	1.161	1.00	0.039	29.5	MW CG N
8.45	0.333	76039	10.00	0.394	7.25	0.285	1.40	7.990	7.36	0.290	10.31	2.317	2.34	0.092	0.60	0.024	3.9	MW CG N
8.45	0.333	76040	15.00	0.591	7.25	0.285	0.85	4.850	11.88	0.468	10.10	2.270	3.12	0.123	0.60	0.024	5.2	MW CG N
8.45	0.333	76041	20.00	0.787	7.25	0.285	0.61	3.480	16.10	0.634	9.82	2.208	3.90	0.154	0.60	0.024	6.5	MW CG N
8.45	0.333	76042	25.00	0.984	7.25	0.285	0.47	2.680	20.32	0.800	9.55	2.147	4.68	0.184	0.60	0.024	7.8	MW CG N
8.45	0.333	76043	35.00	1.378	7.25	0.285	0.32	1.830	28.70	1.130	9.18	2.065	6.30	0.248	0.60	0.024	10.5	MW CG N
8.45	0.333	76044	45.00	1.772	7.25	0.285	0.25	1.430	37.20	1.465	9.30	2.091	7.80	0.307	0.60	0.024	13	MW CG N
8.45	0.333	76045	55.00	2.165	7.25	0.285	0.20	1.140	45.64	1.797	9.13	2.052	9.36	0.369	0.60	0.024	15.6	MW CG N
8.63	0.340	75370	16.00	0.630	7.37	0.290	0.91	5.190	12.55	0.494	11.40	2.564	3.47	0.136	0.63	0.025	5.5	MW CG Z
8.63	0.340	75371	24.50	0.970	7.37	0.290	0.58	3.300	19.79	0.779	11.44	2.574	4.73	0.186	0.63	0.025	7.5	MW CG Z
8.63	0.340	75372	37.00	1.460	7.37	0.290	0.37	2.140	30.40	1.197	11.37	2.559	6.62	0.260	0.63	0.025	10.5	MW CG Z
8.63	0.340	75373	55.00	2.170	7.37	0.290	0.25	1.450	45.57	1.794	11.59	2.608	9.14	0.360	0.63	0.025	14.5	MW CG Z
8.63	0.340	75374	80.50	3.170	7.37	0.290	0.17	0.980	67.46	2.656	11.59	2.608	12.92	0.508	0.63	0.025	20.5	MW CG Z
8.63	0.340	75375	16.00	0.630	7.37	0.290	0.76	4.326	10.21	0.402	7.73	1.739	3.47	0.136	0.63	0.025	5.5	SST CG N
8.63	0.340	75371S	24.50	0.965	7.37	0.290	0.48	2.753	16.05	0.632	7.73	1.740	4.73	0.186	0.63	0.025	7.5	SST CG N
8.63	0.340	75372S	37.00	1.457	7.37	0.290	0.31	1.781	24.84	0.978	7.74	1.742	6.62	0.260	0.63	0.025	10.5	SST CG N
8.63	0.340	75373S	55.00	2.165	7.37	0.290	0.21	1.211	36.53	1.438	7.74	1.741	9.14	0.360	0.63	0.025	14.5	SST CG N
8.63	0.340	75374S	80.50	3.169	7.37	0.290	0.14	0.818	54.05	2.128	7.74	1.741	12.92	0.508	0.63	0.025	20.5	SST CG N
8.65	0.341	76046	15.00	0.591	6.25	0.246	10.00	57.100	6.48	0.255	64.80	14.568	8.52	0.335	1.20	0.047	7.1	MW CG N
8.65	0.341	76047	25.00	0.984	6.25	0.246	5.60	31.980	11.56	0.455	64.74	14.553	13.44	0.529	1.20	0.047	11.2	MW CG N
8.65	0.341	76048	35.00	1.378	6.25	0.246	3.80	21.700	16.64	0.655	63.23	14.215	18.36	0.723	1.20	0.047	15.3	MW CG N
8.65	0.341	76049	45.00	1.772	6.25	0.246	2.90	16.560	21.60	0.850	62.64	14.082	23.40	0.921	1.20	0.047	19.5	MW CG N
8.65	0.341	76050	55.00	2.165	6.25	0.246	2.40	13.700	26.80	1.055	64.32	14.460	28.20	1.110	1.20	0.047	23.5	MW CG N
8.75	0.344	76051	10.00	0.394	7.25	0.285	2.80	15.990	6.67	0.263	18.68	4.199	3.23	0.127	0.75	0.030	4.3	MW CG N
8.75	0.344	76052	15.00	0.591	7.25	0.285	1.70	9.710	10.72	0.422	18.22	4.097	4.28	0.169	0.75	0.030	5.7	MW CG N
8.75	0.344	76053	20.00	0.787	7.25	0.285	1.20	6.850	14.52	0.572	17.42	3.917	5.48	0.216	0.75	0.030	7.3	MW CG N
8.75	0.344	76054	25.00	0.984	7.25	0.285	0.94	5.370	18.47	0.727	17.36	3.903	6.53	0.257	0.75	0.030	8.7	MW CG N
8.75	0.344	76055	35.00	1.378	7.25	0.285	0.65	3.710	26.22	1.032	17.04	3.831	8.78	0.346	0.75	0.030	11.7	MW CG N
8.75	0.344	76056	45.00	1.772	7.25	0.285	0.50	2.860	34.05	1.341	17.03	3.827	10.95	0.431	0.75	0.030	14.6	MW CG N
8.75	0.344	76057	55.00	2.165	7.25	0.285	0.40	2.280	41.80	1.646	16.72	3.759	13.20	0.520	0.75	0.030	17.6	MW CG N
8.75	0.344	76058	65.00	2.559	7.25	0.285	0.34	1.940	49.55	1.951	16.85	3.787	15.45	0.608	0.75	0.030	20.6	MW CG N
8.80	0.346	75474	14.50	0.570	7.20	0.282	2.36	13.500	9.42	0.371	22.26	5.008	4.40	0.173	0.80	0.032	5.5	MW CG Z
8.80	0.346	75475	21.50	0.850	7.20	0.282	1.50	8.590	14.83	0.584	22.30	5.017	6.00	0.236	0.80	0.032	7.5	MW CG Z
8.80	0.346	75476	32.00	1.260	7.20	0.282	0.97	5.560	22.91	0.902	22.28	5.013	8.40	0.331	0.80	0.032	10.5	MW CG Z
8.80	0.346	75477	47.00	1.850	7.20	0.282	0.66	3.780	33.68	1.326	22.28	5.012	11.60	0.457	0.80	0.032	14.5	MW CG Z
8.80	0.346	75478	68.00	2.680	7.20	0.282	0.45	2.550	49.86	1.963	22.28	5.014	16.40	0.646	0.80	0.032	20.5	MW CG Z
8.80	0.346	75474S	14.50	0.571	7.20	0.282	1.97	11.249	7.60	0.299	14.95	3.363	4.40	0.173	0.80	0.032	5.5	SST CG N
8.80	0.346	75475S	21.50	0.846	7.20	0.282	1.25	7.158	11.94	0.470	14.95	3.364	6.00	0.236	0.80	0.032	7.5	SST CG N
8.80	0.346	75476S	32.00	1.260	7.20	0.282	0.81	4.632	18.44	0.726	14.95	3.363	8.40	0.331	0.80	0.032	10.5	SST CG N
8.80	0.346	75477S	47.00	1.850	7.20	0.282	0.55	3.150	27.10	1.067	14.94	3.361	11.60	0.457	0.80	0.032	14.5	SST CG N
8.80	0.346	75478S	68.00	2.677	7.20	0.282	0.37	2.128	40.13	1.580	14.94	3.362	16.40	0.646	0.80	0.032	20.5	SST CG N
8.80	0.346	76059	13.00	0.512	7.20	0.283	2.70	15.420	8.25	0.325	22.27	5.007	4.00	0.157	0.80	0.031	5	MW CG N
8.80	0.346	76060	15.00	0.591	7.20	0.283	2.30	13.130	9.68	0.381	22.27	5.007	4.40	0.173	0.80	0.031	5.5	MW CG N
8.80	0.346	76061	19.00	0.748	7.20	0.283	1.60	9.140	13.40	0.528	21.44	4.820	5.60	0.220	0.80	0.031	7	MW CG N
8.80	0.346	76062	22.00	0.866	7.20	0.283	1.50	8.570	14.85	0.585	22.27	5.007	6.00	0.236	0.80	0.031	7.5	MW CG N
8.80	0.346	76063	29.00	1.142	7.20	0.283	1.00	5.710	21.00	0.827	21.00	4.721	8.00	0.315	0.80	0.031	10	MW CG N
8.80	0.346	76064	32.00	1.260	7.20	0.283	0.96	5.480	23.20	0.913	22.27	5.007	8.40	0.331	0.80	0.031	10.5	MW CG N
8.80	0.346	76065	42.00	1.654	7.20	0.283	0.68	3.880	30.80	1.213	20.94	4.708	11.20	0.441	0.80	0.031	14	MW CG N
8.80	0.346	76066	47.00	1.850	7.20	0.283	0.65	3.710	34.27	1.349	22.27	5.007	11.60	0.457	0.80	0.031	14.5	MW CG N</




Metric Compression Springs

O.D. mm	Century Stock Number	Free Length mm	I.D. mm	Rate		Sugg Max. Defl. mm	Sugg Max. load N	Solid Length mm	Wire Dia. mm	Total Coils Mat'l	Ends Mat'l	F n sh						
				Inches	mm	N/mm	Lbs./In.	Inches	mm	mm	mm							
8.99	0.354	75517	11.00	0.430	7.11	0.280	6.64	37.930	5.16	0.203	34.22	7.700	4.22	0.166	0.94	0.037	4.4	MW CG Z
8.99	0.354	75518	12.50	0.490	7.11	0.280	5.71	32.600	6.02	0.237	34.34	7.726	4.60	0.181	0.94	0.037	4.7	MW CG Z
8.99	0.354	75519	14.00	0.550	7.11	0.280	4.99	28.500	6.88	0.271	34.33	7.724	4.98	0.196	0.94	0.037	5.1	MW CG Z
8.99	0.354	75520	15.50	0.610	7.11	0.280	4.45	25.400	7.72	0.304	34.32	7.722	5.36	0.211	0.94	0.037	5.5	MW CG Z
8.99	0.354	75521	17.00	0.670	7.11	0.280	4.00	22.860	8.56	0.337	34.24	7.704	5.74	0.226	0.94	0.037	6.1	MW CG Z
8.99	0.354	75522	19.00	0.750	7.11	0.280	3.53	20.190	9.70	0.382	34.28	7.713	6.25	0.246	0.94	0.037	6.6	MW CG Z
8.99	0.354	75523	21.00	0.830	7.11	0.280	3.17	18.100	10.82	0.426	34.27	7.711	6.76	0.266	0.94	0.037	6.9	MW CG Z
8.99	0.354	75524	23.00	0.910	7.11	0.280	2.87	16.400	11.94	0.470	34.26	7.708	7.26	0.286	0.94	0.037	7.4	MW CG Z
8.99	0.354	75525	25.00	0.980	7.11	0.280	2.61	14.900	13.16	0.518	34.30	7.718	7.77	0.306	0.94	0.037	7.9	MW CG Z
8.99	0.354	75526	27.50	1.080	7.11	0.280	2.36	13.500	14.50	0.571	34.26	7.709	8.41	0.331	0.94	0.037	8.5	MW CG Z
8.99	0.354	75527	30.00	1.180	7.11	0.280	2.15	12.300	15.93	0.627	34.28	7.712	9.02	0.355	0.94	0.037	9.2	MW CG Z
8.99	0.354	75528	35.00	1.380	7.11	0.280	1.82	10.400	18.85	0.742	34.30	7.717	10.29	0.405	0.94	0.037	10.5	MW CG Z
8.99	0.354	75529	40.00	1.580	7.11	0.280	1.59	9.060	21.64	0.852	34.31	7.719	11.56	0.455	0.94	0.037	12.2	MW CG Z
8.99	0.354	75530	45.00	1.770	7.11	0.280	1.40	8.000	24.49	0.964	34.28	7.712	12.83	0.505	0.94	0.037	13	MW CG Z
8.99	0.354	75531	50.00	1.970	7.11	0.280	1.26	7.200	27.23	1.072	34.30	7.718	14.10	0.555	0.94	0.037	14.3	MW CG Z
8.99	0.354	75532	55.00	2.170	7.11	0.280	1.14	6.500	30.15	1.187	34.29	7.716	15.37	0.605	0.94	0.037	16.2	MW CG Z
8.99	0.354	75533	60.00	2.360	7.11	0.280	1.03	5.900	33.22	1.308	34.30	7.717	16.51	0.650	0.94	0.037	17	MW CG Z
8.99	0.354	75534	65.00	2.560	7.11	0.280	0.96	5.500	35.64	1.403	34.30	7.717	17.91	0.705	0.94	0.037	18.1	MW CG Z
8.99	0.354	75594	11.00	0.430	6.81	0.268	11.85	67.700	4.34	0.171	51.45	11.577	5.05	0.199	1.09	0.043	4.5	MW CG Z
8.99	0.354	75596	14.00	0.550	6.81	0.268	8.84	50.500	5.84	0.230	51.62	11.615	6.02	0.237	1.09	0.043	5.4	MW CG Z
8.99	0.354	75597	15.50	0.610	6.81	0.268	7.84	44.800	6.58	0.259	51.57	11.603	6.50	0.256	1.09	0.043	5.8	MW CG Z
8.99	0.354	75598	17.00	0.670	6.81	0.268	7.05	40.300	7.32	0.288	51.58	11.606	6.99	0.275	1.09	0.043	6.2	MW CG Z
8.99	0.354	75599	19.00	0.750	6.81	0.268	6.21	35.500	8.31	0.327	51.60	11.609	7.65	0.301	1.09	0.043	6.8	MW CG Z
8.99	0.354	75600	21.00	0.830	6.81	0.268	5.55	31.700	9.30	0.366	51.56	11.602	8.28	0.326	1.09	0.043	7.4	MW CG Z
8.99	0.354	75601	23.00	0.910	6.81	0.268	5.02	28.700	10.26	0.404	51.53	11.595	8.94	0.352	1.09	0.043	7.9	MW CG Z
8.99	0.354	75602	25.00	0.980	6.81	0.268	4.57	26.100	11.28	0.444	51.50	11.588	9.58	0.377	1.09	0.043	8.5	MW CG Z
8.99	0.354	75603	27.50	1.080	6.81	0.268	4.13	23.600	12.47	0.491	51.50	11.588	10.39	0.409	1.09	0.043	9.2	MW CG Z
8.99	0.354	75604	30.00	1.180	6.81	0.268	3.75	21.400	13.77	0.542	51.55	11.599	11.20	0.441	1.09	0.043	10	MW CG Z
8.99	0.354	75605	35.00	1.380	6.81	0.268	3.19	18.200	16.18	0.637	51.52	11.593	12.80	0.504	1.09	0.043	11.4	MW CG Z
8.99	0.354	75606	40.00	1.580	6.81	0.268	2.77	15.800	18.64	0.734	51.54	11.597	14.43	0.568	1.09	0.043	12.8	MW CG Z
8.99	0.354	75607	45.00	1.770	6.81	0.268	2.43	13.900	21.18	0.834	51.52	11.593	16.05	0.632	1.09	0.043	14.3	MW CG Z
8.99	0.354	75608	50.00	1.970	6.81	0.268	2.19	12.500	23.55	0.927	51.50	11.588	17.68	0.696	1.09	0.043	15.6	MW CG Z
8.99	0.354	75609	55.00	2.170	6.81	0.268	1.98	11.290	26.09	1.027	51.53	11.595	19.28	0.759	1.09	0.043	17.6	MW CG Z
8.99	0.354	75610	60.00	2.360	6.81	0.268	1.80	10.300	28.60	1.126	51.55	11.598	20.90	0.823	1.09	0.043	18.6	MW CG Z
8.99	0.354	75611	65.00	2.560	6.81	0.268	1.66	9.500	30.99	1.220	51.51	11.590	22.53	0.887	1.09	0.043	20	MW CG Z
8.99	0.354	75394S	12.50	0.492	7.67	0.302	1.28	7.330	6.66	0.262	8.53	1.920	2.64	0.104	0.66	0.026	4.1	SST CG N
8.99	0.354	75395S	14.00	0.551	7.67	0.302	1.13	6.464	7.54	0.297	8.53	1.920	2.82	0.111	0.66	0.026	4.3	SST CG N
8.99	0.354	75396S	15.50	0.610	7.67	0.302	1.01	5.781	8.46	0.333	8.56	1.925	3.00	0.118	0.66	0.026	4.6	SST CG N
8.99	0.354	75397S	17.00	0.669	7.67	0.302	0.92	5.231	9.35	0.368	8.56	1.925	3.18	0.125	0.66	0.026	4.9	SST CG N
8.99	0.354	75398S	19.00	0.748	7.67	0.302	0.81	4.640	10.52	0.414	8.54	1.921	3.40	0.134	0.66	0.026	5.3	SST CG N
8.99	0.354	75399S	21.00	0.827	7.67	0.302	0.73	4.165	11.74	0.462	8.55	1.924	3.66	0.144	0.66	0.026	5.6	SST CG N
8.99	0.354	75400S	23.00	0.906	7.67	0.302	0.66	3.782	12.90	0.508	8.54	1.921	3.89	0.153	0.66	0.026	6	SST CG N
8.99	0.354	75401S	25.00	0.984	7.67	0.302	0.61	3.465	14.10	0.555	8.55	1.923	4.14	0.163	0.66	0.026	6.4	SST CG N
8.99	0.354	75402S	27.50	1.083	7.67	0.302	0.55	3.132	15.60	0.614	8.55	1.923	4.42	0.174	0.66	0.026	6.8	SST CG N
8.99	0.354	75403S	30.00	1.181	7.67	0.302	0.50	2.857	17.09	0.673	8.55	1.923	4.72	0.186	0.66	0.026	7.3	SST CG N
8.99	0.354	75404S	35.00	1.378	7.67	0.302	0.43	2.432	20.09	0.791	8.55	1.924	5.33	0.210	0.66	0.026	8.2	SST CG N
8.99	0.354	75405S	40.00	1.575	7.67	0.302	0.37	2.124	22.99	0.905	8.54	1.922	5.92	0.233	0.66	0.026	9.1	SST CG N
8.99	0.354	75406S	45.00	1.772	7.67	0.302	0.33	1.883	25.93	1.021	8.55	1.923	6.53	0.257	0.66	0.026	10.1	SST CG N
8.99	0.354	75407S	50.00	1.969	7.67	0.302	0.30	1.683	29.03	1.143	8.55	1.924	7.11	0.280	0.66	0.026	11	SST CG N
8.99	0.354	75408S	55.00	2.165	7.67	0.302	0.27	1.533	31.85	1.254	8.54	1.922	7.72	0.304	0.66	0.026	11.9	SST CG N
8.99	0.354	75409S	60.00	2.362	7.67	0.302	0.25	1.399	34.93	1.375	8.55	1.924	8.31	0.327	0.66	0.026	12.8	SST CG N
8.99	0.354	75517S	11.00	0.433	7.11	0.280	5.53	31.596	4.22	0.166	23.31	5.245	4.22	0.166	0.94	0.037	4.4	SST CG N
8.99	0.354	75518S	12.50	0.492	7.11	0.280	4.75	27.100	4.93	0.194	23.36	5.257	4.60	0.181	0.94	0.037	4.7	SST CG N
8.99	0.354	75519S	14.00	0.551	7.11	0.280	4.17	23.800	5.61	0.221	23.38	5.260	4.98	0.196	0.94	0.037	5.1	SST CG N
8.99	0.354	75520S	15.50	0.610	7.11	0.280	3.70	21.100	6.33	0.249	23.35	5.254	5.36	0.211	0.94	0.037	5.5	SST CG N
8.99	0.354	75521S	17.00	0.669	7.11	0.280	3.34	19.042	7.01	0.276	23.36							




Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg. Max. Defl. mm Inches	Sugg. Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends Mat'l	Finish N Zinc									
8.99	0.354	75600S	21.00	0.827	6.81	0.268	4.62	26.400	7.60	0.299	35.08	7.894	8.28	0.326	1.09	0.043	7.4	SST	CG	N
8.99	0.354	75601S	23.00	0.906	6.81	0.268	4.19	23.900	8.38	0.330	35.05	7.887	8.94	0.352	1.09	0.043	7.9	SST	CG	N
8.99	0.354	75602S	25.00	0.984	6.81	0.268	3.82	21.800	9.20	0.362	35.08	7.892	9.58	0.377	1.09	0.043	8.5	SST	CG	N
8.99	0.354	75603S	27.50	1.083	6.81	0.268	3.43	19.600	10.21	0.402	35.02	7.879	10.39	0.409	1.09	0.043	9.3	SST	CG	N
8.99	0.354	75604S	30.00	1.181	6.81	0.268	3.14	17.900	11.20	0.441	35.08	7.894	11.20	0.441	1.09	0.043	9.9	SST	CG	N
8.99	0.354	75605S	35.00	1.378	6.81	0.268	2.65	15.100	13.26	0.522	35.03	7.882	12.80	0.504	1.09	0.043	11.4	SST	CG	N
8.99	0.354	75606S	40.00	1.575	6.81	0.268	2.29	13.100	15.29	0.602	35.05	7.886	14.43	0.568	1.09	0.043	12.9	SST	CG	N
8.99	0.354	75607S	45.00	1.772	6.81	0.268	2.03	11.600	17.27	0.680	35.06	7.888	16.05	0.632	1.09	0.043	14.3	SST	CG	N
8.99	0.354	75608S	50.00	1.969	6.81	0.268	1.82	10.400	19.25	0.758	35.04	7.883	17.68	0.696	1.09	0.043	15.7	SST	CG	N
8.99	0.354	75609S	55.00	2.165	6.81	0.268	1.65	9.405	21.29	0.838	35.03	7.881	19.28	0.759	1.09	0.043	17.6	SST	CG	N
8.99	0.354	75610S	60.00	2.362	6.81	0.268	1.51	8.600	23.29	0.917	35.05	7.886	20.90	0.823	1.09	0.043	18.5	SST	CG	N
8.99	0.354	75611S	65.00	2.559	6.81	0.268	1.38	7.900	25.35	0.998	35.04	7.884	22.53	0.887	1.09	0.043	20	SST	CG	N
9.00	0.354	75560	13.00	0.510	7.00	0.276	5.77	32.960	7.06	0.278	40.72	9.161	5.50	0.217	1.00	0.039	5.5	MW	CG	Z
9.00	0.354	75561	19.00	0.750	7.00	0.276	3.67	20.970	11.10	0.437	40.73	9.164	7.50	0.295	1.00	0.039	7.5	MW	CG	Z
9.00	0.354	75562	28.50	1.120	7.00	0.276	2.38	13.570	17.17	0.676	40.77	9.173	10.50	0.413	1.00	0.039	10.5	MW	CG	Z
9.00	0.354	75563	40.50	1.590	7.00	0.276	1.62	9.230	25.25	0.994	40.76	9.172	14.50	0.571	1.00	0.039	14.5	MW	CG	Z
9.00	0.354	75564	59.00	2.320	7.00	0.276	1.09	6.240	37.36	1.471	40.76	9.172	20.50	0.807	1.00	0.039	20.5	MW	CG	Z
9.00	0.354	75595	12.50	0.490	6.80	0.268	10.13	57.900	5.23	0.206	53.01	11.927	5.54	0.218	1.10	0.043	4.9	MW	CG	Z
9.00	0.354	75560S	13.00	0.512	7.00	0.276	4.81	27.462	5.74	0.226	27.58	6.206	5.50	0.217	1.00	0.039	5.5	SST	CG	N
9.00	0.354	75561S	19.00	0.748	7.00	0.276	3.06	17.476	9.02	0.355	27.57	6.204	7.50	0.295	1.00	0.039	7.5	SST	CG	N
9.00	0.354	75562S	28.50	1.122	7.00	0.276	1.98	11.308	13.92	0.548	27.54	6.197	10.50	0.413	1.00	0.039	10.5	SST	CG	N
9.00	0.354	75563S	40.50	1.594	7.00	0.276	1.35	7.689	20.47	0.806	27.54	6.197	14.50	0.571	1.00	0.039	14.5	SST	CG	N
9.00	0.354	75564S	59.00	2.323	7.00	0.276	0.91	5.196	30.30	1.193	27.55	6.199	20.50	0.807	1.00	0.039	20.5	SST	CG	N
9.00	0.354	76069	12.00	0.472	7.00	0.276	6.60	37.690	6.14	0.242	40.52	9.109	5.00	0.197	1.00	0.039	5	MW	CG	N
9.00	0.354	76070	17.00	0.669	7.00	0.276	4.00	22.840	10.00	0.394	40.00	8.992	7.00	0.276	1.00	0.039	7	MW	CG	N
9.00	0.354	76071	26.00	1.024	7.00	0.276	2.50	14.280	16.00	0.630	40.00	8.992	10.00	0.394	1.00	0.039	10	MW	CG	N
9.00	0.354	76072	38.00	1.496	7.00	0.276	1.70	9.710	23.84	0.938	40.52	9.109	14.00	0.551	1.00	0.039	14	MW	CG	N
9.00	0.354	76073	55.00	2.165	7.00	0.276	1.10	6.280	35.00	1.378	38.50	8.655	20.00	0.787	1.00	0.039	20	MW	CG	N
9.25	0.364	75648	15.00	0.590	6.75	0.266	14.31	81.760	5.13	0.202	73.40	16.515	6.88	0.271	1.25	0.049	5.5	MW	CG	Z
9.25	0.364	75649	22.00	0.870	6.75	0.266	8.96	51.200	8.18	0.322	73.27	16.486	9.38	0.369	1.25	0.049	7.5	MW	CG	Z
9.25	0.364	75650	33.00	1.300	6.75	0.266	5.80	33.130	12.65	0.498	73.32	16.498	13.13	0.517	1.25	0.049	10.5	MW	CG	Z
9.25	0.364	75651	47.00	1.850	6.75	0.266	3.94	22.530	18.62	0.733	73.39	16.513	18.13	0.714	1.25	0.049	14.5	MW	CG	Z
9.25	0.364	75652	69.00	2.720	6.75	0.266	2.66	15.220	27.56	1.085	73.40	16.515	25.63	1.009	1.25	0.049	20.5	MW	CG	Z
9.25	0.364	75648S	15.00	0.591	6.75	0.266	11.93	68.104	4.19	0.165	49.94	11.237	6.88	0.271	1.25	0.049	5.5	SST	CG	N
9.25	0.364	75649S	22.00	0.866	6.75	0.266	7.47	42.666	6.71	0.264	50.06	11.264	9.38	0.369	1.25	0.049	7.5	SST	CG	N
9.25	0.364	75650S	33.00	1.299	6.75	0.266	4.84	27.608	10.36	0.408	50.06	11.264	13.13	0.517	1.25	0.049	10.5	SST	CG	N
9.25	0.364	75651S	47.00	1.850	6.75	0.266	3.29	18.773	15.24	0.600	50.06	11.264	18.13	0.714	1.25	0.049	14.5	SST	CG	N
9.25	0.364	75652S	69.00	2.717	6.75	0.266	2.22	12.685	22.56	0.888	50.06	11.264	25.63	1.009	1.25	0.049	20.5	SST	CG	N
9.25	0.364	76074	10.00	0.394	7.25	0.285	7.30	41.680	5.41	0.213	39.49	8.878	4.50	0.177	1.00	0.039	4.5	MW	CG	N
9.25	0.364	76075	11.00	0.433	6.75	0.266	16.00	91.360	4.56	0.180	72.98	16.406	6.25	0.246	1.25	0.049	5	MW	CG	N
9.25	0.364	76076	15.00	0.591	7.25	0.285	4.30	24.550	8.80	0.346	37.84	8.507	6.20	0.244	1.00	0.039	6.2	MW	CG	N
9.25	0.364	76077	17.00	0.669	6.75	0.266	9.70	55.390	7.52	0.296	72.98	16.407	8.75	0.344	1.25	0.049	7	MW	CG	N
9.25	0.364	76078	20.00	0.787	7.25	0.285	3.10	17.700	12.10	0.476	37.51	8.433	7.90	0.311	1.00	0.039	7.9	MW	CG	N
9.25	0.364	76080	25.00	0.984	6.75	0.266	6.10	34.830	11.96	0.471	72.98	16.407	12.50	0.492	1.25	0.049	10	MW	CG	N
9.25	0.364	76081	35.00	1.378	7.25	0.285	1.70	9.710	22.20	0.874	37.74	8.484	12.80	0.504	1.00	0.039	12.8	MW	CG	N
9.25	0.364	76083	36.00	1.417	6.75	0.266	4.00	22.840	18.25	0.718	72.98	16.407	17.50	0.689	1.25	0.049	14	MW	CG	N
9.25	0.364	76084	45.00	1.772	7.25	0.285	1.30	7.420	28.70	1.130	37.31	8.388	16.30	0.642	1.00	0.039	16.3	MW	CG	N
9.25	0.364	76086	52.00	2.047	6.75	0.266	2.70	15.420	27.00	1.063	72.90	16.389	25.00	0.984	1.25	0.049	20	MW	CG	N
9.25	0.364	76087	65.00	2.559	7.25	0.285	0.87	4.970	42.20	1.661	36.71	8.254	22.80	0.898	1.00	0.039	22.8	MW	CG	N
9.45	0.372	76089	10.00	0.394	8.25	0.325	1.30	7.420	7.12	0.280	9.25	2.079	2.10	0.083	0.60	0.024	3.5	MW	CG	N
9.45	0.372	76090	15.00	0.591	8.25	0.325	0.76	4.340	12.17	0.479	9.25	2.079	2.70	0.106	0.60	0.024	4.5	MW	CG	N
9.45	0.372	76091	20.00	0.787	8.25	0.325	0.54	3.080	16.70	0.657	9.02	2.027	3.30	0.130	0.60	0.024	5.5	MW	CG	N
9.45	0.372	76092	25.00	0.984	8.25	0.325	0.41	2.340	21.04	0.828	8.63	1.939	3.96	0.156	0.60	0.024	6.6	MW	CG	N
9.45	0.372	76093	30.00	1.181	8.25	0.325	0.34	1.940	25.44	1.002	8.65	1.945	4.56	0.180	0.60	0.024	7.6	MW	CG	N
9.45	0.372	76094	40.00	1																




Metric Compression Springs

O.D. mm	Century Stock Number	Free Length mm	I.D. mm	Rate N/mm	Sugg Max. Defl. mm	Sugg Max. load N	Solid Length mm	Wire Dia. mm	Total Coils Mat'l	Ends E F sh								
Inches		Inches	Inches	Lbs./In.	Inches	Lbs.	Inches	Inches										
9.65	0.380	76105	60.00	2.362	7.25	0.285	1.70	9.710	33.48	1.318	56.92	12.795	26.52	1.044	1.20	0.047	22.1	MW CG N
9.75	0.384	76106	10.00	0.394	8.25	0.325	2.60	14.850	6.48	0.255	16.84	3.785	2.78	0.109	0.75	0.030	3.7	MW CG N
9.75	0.384	76107	15.00	0.591	8.25	0.325	1.50	8.570	11.22	0.442	16.84	3.785	3.68	0.145	0.75	0.030	4.9	MW CG N
9.75	0.384	76108	20.00	0.787	8.25	0.325	1.10	6.280	15.31	0.603	16.84	3.785	4.58	0.180	0.75	0.030	6.1	MW CG N
9.75	0.384	76109	25.00	0.984	8.25	0.325	0.83	4.740	19.52	0.769	16.20	3.642	5.48	0.216	0.75	0.030	7.3	MW CG N
9.75	0.384	76110	30.00	1.181	8.25	0.325	0.68	3.880	23.62	0.930	16.06	3.611	6.38	0.251	0.75	0.030	8.5	MW CG N
9.75	0.384	76111	40.00	1.575	8.25	0.325	0.49	2.800	31.75	1.250	15.56	3.498	8.25	0.325	0.75	0.030	11	MW CG N
9.75	0.384	76112	50.00	1.969	8.25	0.325	0.39	2.230	39.95	1.573	15.58	3.503	10.05	0.396	0.75	0.030	13.4	MW CG N
9.75	0.384	76113	60.00	2.362	8.25	0.325	0.32	1.830	48.15	1.896	15.41	3.464	11.85	0.467	0.75	0.030	15.8	MW CG N
10.25	0.404	76114	10.00	0.394	8.25	0.325	6.40	36.540	5.60	0.221	35.85	8.059	4.00	0.157	1.00	0.039	4	MW CG N
10.25	0.404	76115	15.00	0.591	8.25	0.325	3.70	21.130	9.50	0.374	35.15	7.902	5.50	0.217	1.00	0.039	5.5	MW CG N
10.25	0.404	76116	15.00	0.591	7.25	0.285	18.00	102.780	5.55	0.219	99.90	22.458	9.45	0.372	1.50	0.059	6.3	MW CG N
10.25	0.404	76117	20.00	0.787	8.25	0.325	2.60	14.850	13.10	0.516	34.06	7.657	6.90	0.272	1.00	0.039	6.9	MW CG N
10.25	0.404	76118	25.00	0.984	8.25	0.325	2.00	11.420	16.70	0.657	33.40	7.509	8.30	0.327	1.00	0.039	8.3	MW CG N
10.25	0.404	76119	25.00	0.984	7.25	0.285	9.90	56.530	10.30	0.406	101.97	22.924	14.70	0.579	1.50	0.059	9.8	MW CG N
10.25	0.404	76120	25.00	0.984	6.25	0.246	40.93	233.720	5.86	0.231	239.85	53.920	17.80	0.701	2.00	0.079	8.9	MW CG N
10.25	0.404	76121	30.00	1.181	8.25	0.325	1.70	9.710	20.20	0.795	34.34	7.720	9.80	0.386	1.00	0.039	9.8	MW CG N
10.25	0.404	76122	35.00	1.378	7.25	0.285	6.80	38.830	15.05	0.593	102.34	23.007	19.95	0.785	1.50	0.059	13.3	MW CG N
10.25	0.404	76123	40.00	1.575	8.25	0.325	1.20	6.850	27.40	1.079	32.88	7.392	12.60	0.496	1.00	0.039	12.6	MW CG N
10.25	0.404	76124	40.00	1.575	6.25	0.246	23.94	136.700	10.02	0.394	239.86	53.922	27.60	1.087	2.00	0.079	13.8	MW CG N
10.25	0.404	76125	45.00	1.772	7.25	0.285	5.20	29.690	19.65	0.774	102.18	22.971	25.35	0.998	1.50	0.059	16.9	MW CG N
10.25	0.404	76126	50.00	1.969	8.25	0.325	0.95	5.420	34.50	1.358	32.78	7.368	15.50	0.610	1.00	0.039	15.5	MW CG N
10.25	0.404	76127	55.00	2.165	7.25	0.285	4.20	23.980	24.40	0.961	102.48	23.038	30.60	1.205	1.50	0.059	20.4	MW CG N
10.25	0.404	76128	55.00	2.165	6.25	0.246	17.02	97.190	14.09	0.555	239.85	53.920	37.20	1.465	2.00	0.079	18.6	MW CG N
10.25	0.404	76129	60.00	2.362	8.25	0.325	0.78	4.450	41.60	1.638	32.45	7.295	18.40	0.724	1.00	0.039	18.4	MW CG N
10.25	0.404	76130	70.00	2.756	8.25	0.325	0.67	3.830	48.80	1.921	32.70	7.350	21.20	0.835	1.00	0.039	21.2	MW CG N
10.25	0.404	76131	70.00	2.756	6.25	0.246	13.20	75.370	18.17	0.715	239.86	53.922	46.80	1.843	2.00	0.079	23.4	MW CG N
10.25	0.404	76132	80.00	3.150	8.25	0.325	0.59	3.370	56.00	2.205	33.04	7.428	24.00	0.945	1.00	0.039	24	MW CG N
10.65	0.419	76133	15.00	0.591	8.25	0.325	6.80	38.830	8.16	0.321	55.49	12.474	6.84	0.269	1.20	0.047	5.7	MW CG N
10.65	0.419	76134	25.00	0.984	8.25	0.325	3.70	21.130	14.56	0.573	53.87	12.111	10.44	0.411	1.20	0.047	8.7	MW CG N
10.65	0.419	76135	35.00	1.378	8.25	0.325	2.60	14.850	20.96	0.825	54.50	12.251	14.04	0.553	1.20	0.047	11.7	MW CG N
10.65	0.419	76136	45.00	1.772	8.25	0.325	2.00	11.420	27.36	1.077	54.72	12.302	17.64	0.694	1.20	0.047	14.7	MW CG N
10.65	0.419	76137	55.00	2.165	8.25	0.325	1.60	9.140	33.76	1.329	54.02	12.143	21.24	0.836	1.20	0.047	17.7	MW CG N
10.65	0.419	76138	65.00	2.559	8.25	0.325	1.30	7.420	40.16	1.581	52.21	11.737	24.84	0.978	1.20	0.047	20.7	MW CG N
10.75	0.423	76139	10.00	0.394	9.25	0.364	2.30	13.130	6.66	0.262	15.33	3.445	2.55	0.100	0.75	0.030	3.4	MW CG N
10.75	0.423	76140	15.00	0.591	9.25	0.364	1.30	7.420	11.70	0.461	15.21	3.419	3.30	0.130	0.75	0.030	4.4	MW CG N
10.75	0.423	76141	20.00	0.787	9.25	0.364	0.98	5.600	15.64	0.616	15.32	3.445	3.98	0.157	0.75	0.030	5.3	MW CG N
10.75	0.423	76142	25.00	0.984	9.25	0.364	0.73	4.170	20.20	0.795	14.75	3.315	4.80	0.189	0.75	0.030	6.4	MW CG N
10.75	0.423	76143	35.00	1.378	9.25	0.364	0.50	2.860	28.70	1.130	14.35	3.226	6.30	0.248	0.75	0.030	8.4	MW CG N
10.75	0.423	76144	45.00	1.772	9.25	0.364	0.38	2.170	37.20	1.465	14.14	3.178	7.80	0.307	0.75	0.030	10.4	MW CG N
10.75	0.423	76145	55.00	2.165	9.25	0.364	0.31	1.770	45.70	1.799	14.17	3.185	9.30	0.366	0.75	0.030	12.4	MW CG N
10.75	0.423	76146	65.00	2.559	9.25	0.364	0.26	1.480	54.20	2.134	14.09	3.168	10.80	0.425	0.75	0.030	14.4	MW CG N
10.80	0.425	75479	20.00	0.790	9.20	0.361	1.21	6.910	15.14	0.596	18.31	4.119	4.40	0.173	0.80	0.032	5.5	MW CG Z
10.80	0.425	75480	30.00	1.180	9.20	0.361	0.77	4.400	23.77	0.936	18.30	4.117	6.00	0.236	0.80	0.032	7.5	MW CG Z
10.80	0.425	75481	45.50	1.790	9.20	0.361	0.50	2.850	36.75	1.447	18.30	4.118	8.40	0.331	0.80	0.032	10.5	MW CG Z
10.80	0.425	75482	66.00	2.600	9.20	0.361	0.33	1.900	54.38	2.141	18.12	4.076	11.60	0.457	0.80	0.032	14.5	MW CG Z
10.80	0.425	75483	96.50	3.800	9.20	0.361	0.23	1.290	80.09	3.153	18.05	4.061	16.40	0.646	0.80	0.032	20.5	MW CG Z
10.80	0.425	75484	12.50	0.490	9.02	0.355	3.15	18.000	7.87	0.310	24.80	5.580	3.78	0.149	0.89	0.035	4.1	MW CG Z
10.80	0.425	75485	14.00	0.550	9.02	0.355	2.77	15.800	8.97	0.353	24.79	5.577	4.06	0.160	0.89	0.035	4.4	MW CG Z
10.80	0.425	75486	15.50	0.610	9.02	0.355	2.47	14.100	10.03	0.395	24.76	5.570	4.34	0.171	0.89	0.035	4.7	MW CG Z
10.80	0.425	75487	17.00	0.670	9.02	0.355	2.22	12.700	11.15	0.439	24.78	5.575	4.62	0.182	0.89	0.035	5	MW CG Z
10.80	0.425	75488	19.00	0.750	9.02	0.355	1.96	11.200	12.62	0.497	24.74	5.566	5.00	0.197	0.89	0.035	5.4	MW CG Z
10.80	0.425	75489	21.00	0.830	9.02	0.355	1.75	10.000	14.15	0.557	24.76	5.570	5.38	0.212	0.89	0.035	5.8	MW CG Z
10.80	0.425	75490	23.00	0.910	9.02	0.355	1.59	9.100	15.55	0.612	24.75	5.569	5.74	0.226	0.89	0.035	6.2	MW CG Z
10.80	0.425	75491	25.00	0.980	9.02	0.355	1.45	8.300	17.04	0.671	24.75	5.569	6.12	0.241	0.89	0.035	6.6	MW CG Z
10.80	0.425	75492	27.50	1.080	9.02	0.355	1.31	7.500	18.87	0.743	24.77	5.573	6.58	0.259	0.89	0.035	7.1	MW CG Z
10.80	0.425	75493	30.00	1.180	9.0													




Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends Mat'l	F nsh									
10.80	0.425	75682	55.00	2.170	8.20	0.323	2.45	14.000	28.98	1.141	71.00	15.974	20.90	0.823	1.30	0.051	15.9	MW	CG	Z
10.80	0.425	75683	60.00	2.360	8.20	0.323	2.24	12.800	31.70	1.248	71.00	15.974	22.66	0.892	1.30	0.051	17.2	MW	CG	Z
10.80	0.425	75479S	20.00	0.787	9.20	0.361	1.01	5.759	12.17	0.479	12.26	2.759	4.40	0.173	0.80	0.032	5.5	SST	CG	N
10.80	0.425	75480S	30.00	1.181	9.20	0.361	0.64	3.665	19.13	0.753	12.27	2.760	6.00	0.236	0.80	0.032	7.5	SST	CG	N
10.80	0.425	75481S	45.50	1.791	9.20	0.361	0.42	2.371	29.57	1.164	12.27	2.760	8.40	0.331	0.80	0.032	10.5	SST	CG	N
10.80	0.425	75482S	66.00	2.598	9.20	0.361	0.28	1.586	44.22	1.741	12.27	2.761	11.60	0.457	0.80	0.032	14.5	SST	CG	N
10.80	0.425	75483S	96.50	3.799	9.20	0.361	0.19	1.073	65.35	2.573	12.27	2.761	16.40	0.646	0.80	0.032	20.5	SST	CG	N
10.80	0.425	75484S	12.50	0.492	9.02	0.355	2.63	15.000	6.38	0.251	16.73	3.765	3.78	0.149	0.89	0.035	4.1	SST	CG	N
10.80	0.425	75485S	14.00	0.551	9.02	0.355	2.31	13.200	7.24	0.285	16.72	3.762	4.06	0.160	0.89	0.035	4.4	SST	CG	N
10.80	0.425	75486S	15.50	0.610	9.02	0.355	2.05	11.700	8.18	0.322	16.74	3.767	4.34	0.171	0.89	0.035	4.7	SST	CG	N
10.80	0.425	75487S	17.00	0.669	9.02	0.355	1.86	10.600	9.02	0.355	16.72	3.763	4.62	0.182	0.89	0.035	5	SST	CG	N
10.80	0.425	75488S	19.00	0.748	9.02	0.355	1.63	9.300	10.29	0.405	16.74	3.767	5.00	0.197	0.89	0.035	5.4	SST	CG	N
10.80	0.425	75489S	21.00	0.827	9.02	0.355	1.45	8.300	11.51	0.453	16.71	3.760	5.38	0.212	0.89	0.035	5.8	SST	CG	N
10.80	0.425	75490S	23.00	0.906	9.02	0.355	1.33	7.600	12.57	0.495	16.72	3.762	5.74	0.226	0.89	0.035	6.2	SST	CG	N
10.80	0.425	75491S	25.00	0.984	9.02	0.355	1.21	6.900	13.84	0.545	16.72	3.761	6.12	0.241	0.89	0.035	6.6	SST	CG	N
10.80	0.425	75492S	27.50	1.083	9.02	0.355	1.09	6.200	15.42	0.607	16.72	3.763	6.58	0.259	0.89	0.035	7.1	SST	CG	N
10.80	0.425	75493S	30.00	1.181	9.02	0.355	1.00	5.689	16.79	0.661	16.71	3.760	7.06	0.278	0.89	0.035	7.8	SST	CG	N
10.80	0.425	75494S	35.00	1.378	9.02	0.355	0.84	4.800	19.91	0.784	16.72	3.763	8.00	0.315	0.89	0.035	8.6	SST	CG	N
10.80	0.425	75495S	40.00	1.575	9.02	0.355	0.74	4.200	22.76	0.896	16.72	3.763	8.92	0.351	0.89	0.035	9.5	SST	CG	N
10.80	0.425	75496S	45.00	1.772	9.02	0.355	0.65	3.700	25.83	1.017	16.72	3.763	9.86	0.388	0.89	0.035	10.6	SST	CG	N
10.80	0.425	75497S	50.00	1.969	9.02	0.355	0.58	3.332	28.68	1.129	16.72	3.762	10.80	0.425	0.89	0.035	12	SST	CG	N
10.80	0.425	75668S	12.50	0.492	8.20	0.323	10.79	61.600	4.47	0.176	48.19	10.842	6.07	0.239	1.30	0.051	4.6	SST	CG	N
10.80	0.425	75669S	14.00	0.551	8.20	0.323	9.37	53.500	5.16	0.203	48.27	10.861	6.58	0.259	1.30	0.051	5	SST	CG	N
10.80	0.425	75670S	15.50	0.610	8.20	0.323	8.27	47.200	5.84	0.230	48.25	10.856	7.11	0.280	1.30	0.051	5.4	SST	CG	N
10.80	0.425	75671S	17.00	0.669	8.20	0.323	7.41	42.300	6.53	0.257	48.32	10.871	7.62	0.300	1.30	0.051	5.8	SST	CG	N
10.80	0.425	75672S	19.00	0.748	8.20	0.323	6.52	37.200	7.42	0.292	48.28	10.862	8.33	0.328	1.30	0.051	6.4	SST	CG	N
10.80	0.425	75673S	21.00	0.827	8.20	0.323	5.80	33.100	8.33	0.328	48.25	10.857	9.02	0.355	1.30	0.051	6.9	SST	CG	N
10.80	0.425	75674S	23.00	0.906	8.20	0.323	5.24	29.900	9.22	0.363	48.24	10.854	9.73	0.383	1.30	0.051	7.4	SST	CG	N
10.80	0.425	75675S	25.00	0.984	8.20	0.323	4.76	27.200	10.14	0.399	48.24	10.853	10.44	0.411	1.30	0.051	7.9	SST	CG	N
10.80	0.425	75676S	27.50	1.083	8.20	0.323	4.29	24.500	11.28	0.444	48.35	10.878	11.30	0.445	1.30	0.051	8.6	SST	CG	N
10.80	0.425	75677S	30.00	1.181	8.20	0.323	3.89	22.200	12.42	0.489	48.25	10.856	12.17	0.479	1.30	0.051	9.3	SST	CG	N
10.80	0.425	75678S	35.00	1.378	8.20	0.323	3.29	18.800	14.68	0.578	48.29	10.866	13.92	0.548	1.30	0.051	10.6	SST	CG	N
10.80	0.425	75679S	40.00	1.575	8.20	0.323	2.86	16.300	16.94	0.667	48.32	10.872	15.67	0.617	1.30	0.051	11.9	SST	CG	N
10.80	0.425	75680S	45.00	1.772	8.20	0.323	2.52	14.400	19.18	0.755	48.32	10.872	17.42	0.686	1.30	0.051	13.2	SST	CG	N
10.80	0.425	75681S	50.00	1.969	8.20	0.323	2.26	12.900	21.39	0.842	48.28	10.862	19.15	0.754	1.30	0.051	14.5	SST	CG	N
10.80	0.425	75682S	55.00	2.165	8.20	0.323	2.03	11.600	23.80	0.937	48.31	10.869	20.90	0.823	1.30	0.051	15.9	SST	CG	N
10.80	0.425	75683S	60.00	2.362	8.20	0.323	1.86	10.600	26.04	1.025	48.29	10.865	22.66	0.892	1.30	0.051	17.3	SST	CG	N
10.80	0.425	76147	18.00	0.709	9.20	0.362	1.40	7.990	13.08	0.515	18.31	4.115	4.00	0.157	0.80	0.031	5	MW	CG	N
10.80	0.425	76148	20.00	0.787	9.20	0.362	1.20	6.850	15.25	0.601	18.31	4.115	4.40	0.173	0.80	0.031	5.5	MW	CG	N
10.80	0.425	76149	27.00	1.063	9.20	0.362	0.83	4.740	21.40	0.843	17.76	3.993	5.60	0.220	0.80	0.031	7	MW	CG	N
10.80	0.425	76150	30.00	1.181	9.20	0.362	0.76	4.340	24.00	0.945	18.24	4.101	6.00	0.236	0.80	0.031	7.5	MW	CG	N
10.80	0.425	76151	41.00	1.614	9.20	0.362	0.52	2.970	33.00	1.299	17.16	3.858	8.00	0.315	0.80	0.031	10	MW	CG	N
10.80	0.425	76152	46.00	1.811	9.20	0.362	0.49	2.800	37.36	1.471	18.31	4.115	8.40	0.331	0.80	0.031	10.5	MW	CG	N
10.80	0.425	76153	60.00	2.362	9.20	0.362	0.35	2.000	48.80	1.921	17.08	3.840	11.20	0.441	0.80	0.031	14	MW	CG	N
10.80	0.425	76154	66.00	2.598	9.20	0.362	0.33	1.880	54.40	2.142	17.95	4.036	11.60	0.457	0.80	0.031	14.5	MW	CG	N
10.80	0.425	76155	88.00	3.465	9.20	0.362	0.23	1.310	72.00	2.835	16.56	3.723	16.00	0.630	0.80	0.031	20	MW	CG	N
10.80	0.425	76156	97.00	3.819	9.20	0.362	0.23	1.310	79.59	3.133	18.31	4.115	16.40	0.646	0.80	0.031	20.5	MW	CG	N
11.00	0.433	75565S	17.50	0.690	9.00	0.355	2.95	16.870	11.41	0.449	33.67	7.576	5.50	0.217	1.00	0.039	5.5	MW	CG	Z
11.00	0.433	75566S	26.00	1.020	9.00	0.355	1.88	10.740	17.93	0.706	33.69	7.580	7.50	0.295	1.00	0.039	7.5	MW	CG	Z
11.00	0.433	75567S	39.00	1.540	9.00	0.355	1.22	6.950	27.71	1.091	33.69	7.580	10.50	0.413	1.00	0.039	10.5	MW	CG	Z
11.00	0.433	75568S	56.00	2.210	9.00	0.355	0.83	4.720	40.77	1.605	33.70	7.582	14.50	0.571	1.00	0.039	14.5	MW	CG	Z
11.00	0.433	75569S	81.50	3.210	9.00	0.355	0.56	3.190	60.33	2.375	33.69	7.581	20.50	0.807	1.00	0.039	20.5	MW	CG	Z
11.00	0.433	75565S	17.50	0.689	9.00	0.355	2.46	14.061	9.25	0.364	22.75	5.118	5.50	0.217	1.00	0.039	5.5	SST	CG	N
11.00	0.433	75566S	26.00	1.024	9.00	0.355	1.57	8.948	14.55	0.573	22.79	5.127	7.50	0.295	1.00	0.039	7.5	SST	CG	N




Metric Compression Springs

O.D. mm	Century Stock Number	Free Length mm	I.D. mm	Rate N/mm	Sugg Max. Defl. mm	Sugg Max. load N	Solid Length mm	Wire Dia. mm	Total Coils Mat'l	Ends E F sh								
Inches		Inches	Inches	Lbs./In.	Inches	Lbs.	Inches	Inches										
11.25	0.443	76166	32.00	1.260	8.75	0.344	3.10	17.700	19.50	0.768	60.45	13.590	12.50	0.492	1.25	0.049	10	MW CG N
11.25	0.443	76167	40.00	1.575	8.25	0.325	4.80	27.410	19.75	0.778	94.80	21.312	20.25	0.797	1.50	0.059	13.5	MW CG N
11.25	0.443	76169	45.00	1.772	7.25	0.285	16.03	91.530	13.84	0.545	221.78	49.857	29.00	1.142	2.00	0.079	14.5	MW CG N
11.25	0.443	76170	47.00	1.850	8.75	0.344	2.10	11.990	29.00	1.142	60.90	13.690	17.50	0.689	1.25	0.049	14	MW CG N
11.25	0.443	76171	50.00	1.969	8.25	0.325	3.80	21.700	25.25	0.994	95.95	21.570	24.75	0.974	1.50	0.059	16.5	MW CG N
11.25	0.443	76173	60.00	2.362	8.25	0.325	3.10	17.700	30.45	1.199	94.40	21.221	29.55	1.163	1.50	0.059	19.7	MW CG N
11.25	0.443	76174	60.00	2.362	7.25	0.285	11.72	66.920	18.92	0.745	221.78	49.858	38.20	1.504	2.00	0.079	19.1	MW CG N
11.25	0.443	76175	68.00	2.677	8.75	0.344	1.40	7.990	43.00	1.693	60.20	13.534	25.00	0.984	1.25	0.049	20	MW CG N
11.25	0.443	76177	75.00	2.953	7.25	0.285	9.28	52.990	23.90	0.941	221.78	49.859	47.20	1.858	2.00	0.079	23.6	MW CG N
11.30	0.445	76178	15.00	0.591	9.30	0.366	3.30	18.840	9.90	0.390	32.68	7.346	4.80	0.189	1.00	0.039	4.8	MW CG N
11.30	0.445	76179	20.00	0.787	9.30	0.366	2.30	13.130	14.00	0.551	32.20	7.239	6.00	0.236	1.00	0.039	6	MW CG N
11.30	0.445	76180	45.00	1.772	9.30	0.366	0.93	5.310	33.00	1.299	30.69	6.899	12.00	0.472	1.00	0.039	12	MW CG N
11.30	0.445	76181	55.00	2.165	9.30	0.366	0.75	4.280	40.60	1.598	30.45	6.845	14.40	0.567	1.00	0.039	14.4	MW CG N
11.30	0.445	76182	65.00	2.559	9.30	0.366	0.63	3.600	48.20	1.898	30.37	6.827	16.80	0.661	1.00	0.039	16.8	MW CG N
11.30	0.445	76183	75.00	2.953	9.30	0.366	0.54	3.080	55.80	2.197	30.13	6.774	19.20	0.756	1.00	0.039	19.2	MW CG N
11.60	0.457	75718	18.50	0.730	8.40	0.331	19.35	110.580	6.07	0.239	117.46	26.428	8.80	0.346	1.60	0.063	5.5	MW CG Z
11.60	0.457	75719	27.00	1.060	8.40	0.331	12.31	70.370	9.55	0.376	117.59	26.458	12.00	0.472	1.60	0.063	7.5	MW CG Z
11.60	0.457	75720	40.50	1.590	8.40	0.331	7.97	45.530	14.78	0.582	117.78	26.500	16.80	0.661	1.60	0.063	10.5	MW CG Z
11.60	0.457	75721	58.50	2.300	8.40	0.331	5.42	30.960	21.72	0.855	117.66	26.473	23.20	0.913	1.60	0.063	14.5	MW CG Z
11.60	0.457	75722	85.00	3.350	8.40	0.331	3.66	20.920	32.16	1.266	117.71	26.485	32.80	1.291	1.60	0.063	20.5	MW CG Z
11.60	0.457	75718S	18.50	0.728	8.40	0.331	16.14	92.148	5.00	0.197	80.68	18.153	8.80	0.346	1.60	0.063	5.5	SST CG N
11.60	0.457	75719S	27.00	1.063	8.40	0.331	10.27	58.640	7.85	0.309	80.53	18.120	12.00	0.472	1.60	0.063	7.5	SST CG N
11.60	0.457	75720S	40.50	1.594	8.40	0.331	6.65	37.943	12.14	0.478	80.61	18.137	16.80	0.661	1.60	0.063	10.5	SST CG N
11.60	0.457	75721S	58.50	2.303	8.40	0.331	4.52	25.802	17.86	0.703	80.62	18.139	23.20	0.913	1.60	0.063	14.5	SST CG N
11.60	0.457	75722S	85.00	3.346	8.40	0.331	3.05	17.433	26.42	1.040	80.58	18.130	32.80	1.291	1.60	0.063	20.5	SST CG N
11.60	0.457	76184	14.00	0.551	8.40	0.331	22.00	125.620	5.36	0.211	117.81	26.485	8.00	0.315	1.60	0.063	5	MW CG N
11.60	0.457	76185	21.00	0.827	8.40	0.331	13.00	74.230	9.06	0.357	117.81	26.484	11.20	0.441	1.60	0.063	7	MW CG N
11.60	0.457	76186	31.00	1.220	8.40	0.331	8.30	47.390	14.19	0.559	117.80	26.483	16.00	0.630	1.60	0.063	10	MW CG N
11.60	0.457	76187	44.00	1.732	8.40	0.331	5.60	31.980	21.04	0.828	117.80	26.483	22.40	0.882	1.60	0.063	14	MW CG N
11.60	0.457	76188	63.00	2.480	8.40	0.331	3.70	21.130	31.00	1.220	114.70	25.786	32.00	1.260	1.60	0.063	20	MW CG N
11.70	0.461	76189	20.00	0.787	9.30	0.366	4.10	23.410	12.32	0.485	50.51	11.356	7.68	0.302	1.20	0.047	6.4	MW CG N
11.70	0.461	76190	30.00	1.181	9.30	0.366	2.60	14.850	19.20	0.756	49.92	11.222	10.80	0.425	1.20	0.047	9	MW CG N
11.70	0.461	76191	40.00	1.575	9.30	0.366	1.90	10.850	26.20	1.031	49.78	11.191	13.80	0.543	1.20	0.047	11.5	MW CG N
11.70	0.461	76192	50.00	1.969	9.30	0.366	1.50	8.570	33.08	1.302	49.62	11.155	16.92	0.666	1.20	0.047	14.1	MW CG N
11.70	0.461	76193	60.00	2.362	9.30	0.366	1.20	6.850	39.96	1.573	47.95	10.780	20.04	0.789	1.20	0.047	16.7	MW CG N
11.70	0.461	76194	70.00	2.756	9.30	0.366	1.10	6.280	46.84	1.844	51.52	11.583	23.16	0.912	1.20	0.047	19.3	MW CG N
11.85	0.467	76195	10.00	0.394	10.35	0.407	2.00	11.420	6.97	0.274	13.94	3.135	2.40	0.094	0.75	0.030	3.2	MW CG N
11.85	0.467	76196	15.00	0.591	10.35	0.407	1.30	7.420	10.73	0.422	13.94	3.135	2.93	0.115	0.75	0.030	3.9	MW CG N
11.85	0.467	76197	20.00	0.787	10.35	0.407	0.88	5.020	15.85	0.624	13.94	3.135	3.53	0.139	0.75	0.030	4.7	MW CG N
11.85	0.467	76198	25.00	0.984	10.35	0.407	0.66	3.770	20.80	0.819	13.73	3.086	4.20	0.165	0.75	0.030	5.6	MW CG N
11.85	0.467	76199	30.00	1.181	10.35	0.407	0.54	3.080	25.20	0.992	13.61	3.059	4.80	0.189	0.75	0.030	6.4	MW CG N
11.85	0.467	76200	40.00	1.575	10.35	0.407	0.39	2.230	33.92	1.335	13.23	2.974	6.08	0.239	0.75	0.030	8.1	MW CG N
11.85	0.467	76201	50.00	1.969	10.35	0.407	0.31	1.770	42.72	1.682	13.24	2.977	7.28	0.287	0.75	0.030	9.7	MW CG N
11.85	0.467	76202	60.00	2.362	10.35	0.407	0.25	1.430	51.37	2.022	12.84	2.887	8.63	0.340	0.75	0.030	11.5	MW CG N
11.90	0.469	76203	15.00	0.591	8.30	0.327	29.00	165.590	4.92	0.194	142.68	32.076	10.08	0.397	1.80	0.071	5.6	MW CG N
11.90	0.469	76204	25.00	0.984	8.30	0.327	16.00	91.360	9.34	0.368	149.44	33.595	15.66	0.617	1.80	0.071	8.7	MW CG N
11.90	0.469	76205	35.00	1.378	8.30	0.327	11.00	62.810	13.94	0.549	153.34	34.472	21.06	0.829	1.80	0.071	11.7	MW CG N
11.90	0.469	76206	45.00	1.772	8.30	0.327	8.20	46.820	18.36	0.723	150.55	33.845	26.64	1.049	1.80	0.071	14.8	MW CG N
11.90	0.469	76207	55.00	2.165	8.30	0.327	6.60	37.690	22.78	0.897	150.35	33.800	32.22	1.269	1.80	0.071	17.9	MW CG N
11.90	0.469	76208	65.00	2.559	8.30	0.327	5.50	31.410	27.20	1.071	149.60	33.631	37.80	1.488	1.80	0.071	21	MW CG N
11.99	0.472	75535	12.50	0.490	10.11	0.398	3.61	20.630	7.21	0.284	26.04	5.859	3.53	0.139	0.94	0.037	3.7	MW CG Z
11.99	0.472	75536	15.50	0.610	10.11	0.398	2.82	16.100	9.25	0.364	26.04	5.860	4.01	0.158	0.94	0.037	4.1	MW CG Z
11.99	0.472	75537	19.00	0.750	10.11	0.398	2.24	12.800	11.63	0.458	26.05	5.862	4.55	0.179	0.94	0.037	4.7	MW CG Z
11.99	0.472	75538	22.00	0.870	10.11	0.398	1.91	10.900	13.67	0.538	26.06	5.864	5.00	0.197	0.94	0.037	5.1	MW CG Z
11.99	0.472	75539	25.00	0.980	10.11	0.398	1.66	9.500	15.70	0.618	26.09	5.871	5.49	0.216	0.94	0.037	5.6	MW CG Z
11.99	0.472	75540	30.00	1.180	10.11	0.398	1.36	7.780	19.15	0.754	26.07	5.866	6.25	0.246	0.94	0.037</		




Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg. Max. Defl. mm Inches	Sugg. Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Mat'l	Ends	Fns'h						
11.99	0.472	75694	55.00	2.170	9.19	0.362	2.59	14.800	30.58	1.204	79.20	17.819	20.85	0.821	1.40	0.055	14.8	MW CG Z
11.99	0.472	75695	60.00	2.360	9.19	0.362	2.36	13.500	33.53	1.320	79.20	17.820	22.58	0.889	1.40	0.055	16	MW CG Z
11.99	0.472	75696	65.00	2.560	9.19	0.362	2.17	12.400	36.50	1.437	79.20	17.819	24.31	0.957	1.40	0.055	17.3	MW CG Z
11.99	0.472	75697	70.00	2.760	9.19	0.362	2.01	11.500	39.37	1.550	79.22	17.825	26.06	1.026	1.40	0.055	18.5	MW CG Z
11.99	0.472	75698	75.00	2.950	9.19	0.362	1.87	10.700	42.32	1.666	79.23	17.826	27.79	1.094	1.40	0.055	19.7	MW CG Z
11.99	0.472	75535S	12.50	0.492	10.11	0.398	3.01	17.185	5.82	0.229	17.49	3.935	3.53	0.139	0.94	0.037	3.7	SST CG N
11.99	0.472	75536S	15.50	0.610	10.11	0.398	2.35	13.400	7.44	0.293	17.45	3.926	4.01	0.158	0.94	0.037	4.1	SST CG N
11.99	0.472	75537S	19.00	0.748	10.11	0.398	1.87	10.700	9.32	0.367	17.45	3.927	4.55	0.179	0.94	0.037	4.7	SST CG N
11.99	0.472	75538S	22.00	0.866	10.11	0.398	1.59	9.100	10.97	0.432	17.47	3.931	5.00	0.197	0.94	0.037	5.1	SST CG N
11.99	0.472	75539S	25.00	0.984	10.11	0.398	1.38	7.900	12.62	0.497	17.45	3.926	5.49	0.216	0.94	0.037	5.6	SST CG N
11.99	0.472	75540S	30.00	1.181	10.11	0.398	1.14	6.481	15.39	0.606	17.45	3.927	6.25	0.246	0.94	0.037	6.6	SST CG N
11.99	0.472	75541S	35.00	1.378	10.11	0.398	0.96	5.500	18.14	0.714	17.45	3.927	7.04	0.277	0.94	0.037	7.2	SST CG N
11.99	0.472	75542S	40.00	1.575	10.11	0.398	0.84	4.800	20.78	0.818	17.45	3.926	7.80	0.307	0.94	0.037	7.9	SST CG N
11.99	0.472	75543S	45.00	1.772	10.11	0.398	0.74	4.223	23.62	0.930	17.45	3.927	8.59	0.338	0.94	0.037	9.1	SST CG N
11.99	0.472	75544S	50.00	1.969	10.11	0.398	0.67	3.800	26.24	1.033	17.44	3.925	9.35	0.368	0.94	0.037	9.5	SST CG N
11.99	0.472	75545S	55.00	2.165	10.11	0.398	0.60	3.432	29.06	1.144	17.45	3.926	10.13	0.399	0.94	0.037	10.7	SST CG N
11.99	0.472	75546S	60.00	2.362	10.11	0.398	0.55	3.132	31.85	1.254	17.46	3.928	10.90	0.429	0.94	0.037	11.5	SST CG N
11.99	0.472	75547S	65.00	2.559	10.11	0.398	0.51	2.900	34.39	1.354	17.45	3.927	11.66	0.459	0.94	0.037	11.8	SST CG N
11.99	0.472	75548S	70.00	2.756	10.11	0.398	0.47	2.700	36.93	1.454	17.45	3.926	12.45	0.490	0.94	0.037	12.5	SST CG N
11.99	0.472	75549S	75.00	2.953	10.11	0.398	0.44	2.491	40.03	1.576	17.45	3.926	13.21	0.520	0.94	0.037	14	SST CG N
11.99	0.472	75684S	12.50	0.492	9.19	0.362	11.59	66.200	4.62	0.182	53.55	12.048	6.15	0.242	1.40	0.055	4.4	SST CG N
11.99	0.472	75685S	15.50	0.610	9.19	0.362	8.84	50.500	6.07	0.239	53.64	12.070	7.19	0.283	1.40	0.055	5.1	SST CG N
11.99	0.472	75686S	19.00	0.748	9.19	0.362	6.94	39.600	7.75	0.305	53.68	12.078	8.41	0.331	1.40	0.055	6	SST CG N
11.99	0.472	75687S	22.00	0.866	9.19	0.362	5.85	33.400	9.17	0.361	53.59	12.057	9.45	0.372	1.40	0.055	6.7	SST CG N
11.99	0.472	75688S	25.00	0.984	9.19	0.362	5.06	28.900	10.59	0.417	53.56	12.051	10.49	0.413	1.40	0.055	7.5	SST CG N
11.99	0.472	75689S	30.00	1.181	9.19	0.362	4.13	23.600	12.98	0.511	53.60	12.060	12.22	0.481	1.40	0.055	8.7	SST CG N
11.99	0.472	75690S	35.00	1.378	9.19	0.362	3.49	19.900	15.39	0.606	53.60	12.059	13.94	0.549	1.40	0.055	9.9	SST CG N
11.99	0.472	75691S	40.00	1.575	9.19	0.362	3.03	17.300	17.70	0.697	53.59	12.058	15.67	0.617	1.40	0.055	11.1	SST CG N
11.99	0.472	75692S	45.00	1.772	9.19	0.362	2.66	15.200	20.14	0.793	53.57	12.054	17.40	0.685	1.40	0.055	12.4	SST CG N
11.99	0.472	75693S	50.00	1.969	9.19	0.362	2.38	13.600	22.53	0.887	53.61	12.063	19.13	0.753	1.40	0.055	13.6	SST CG N
11.99	0.472	75694S	55.00	2.165	9.19	0.362	2.15	12.300	24.92	0.981	53.63	12.066	20.85	0.821	1.40	0.055	14.8	SST CG N
11.99	0.472	75695S	60.00	2.362	9.19	0.362	1.96	11.200	27.36	1.077	53.61	12.062	22.58	0.889	1.40	0.055	16.1	SST CG N
11.99	0.472	75696S	65.00	2.559	9.19	0.362	1.80	10.300	29.74	1.171	53.60	12.061	24.31	0.957	1.40	0.055	17.3	SST CG N
11.99	0.472	75697S	70.00	2.756	9.19	0.362	1.68	9.600	31.90	1.256	53.59	12.058	26.06	1.026	1.40	0.055	18.4	SST CG N
11.99	0.472	75698S	75.00	2.953	9.19	0.362	1.56	8.900	34.42	1.355	53.60	12.060	27.79	1.094	1.40	0.055	19.7	SST CG N
12.00	0.472	75748	18.00	0.710	8.00	0.314	47.24	269.970	4.45	0.175	209.97	47.244	11.00	0.433	2.00	0.079	5.5	MW CG Z
12.00	0.472	75749	26.50	1.040	8.00	0.314	30.06	171.800	7.01	0.276	210.74	47.416	15.00	0.591	2.00	0.079	7.5	MW CG Z
12.00	0.472	75750	38.50	1.520	8.00	0.314	19.45	111.160	10.82	0.426	210.47	47.355	21.00	0.827	2.00	0.079	10.5	MW CG Z
12.00	0.472	75751	55.00	2.170	8.00	0.314	13.23	75.590	15.93	0.627	210.65	47.396	29.00	1.142	2.00	0.079	14.5	MW CG Z
12.00	0.472	75752	79.50	3.130	8.00	0.314	8.94	51.080	23.55	0.927	210.43	47.347	41.00	1.614	2.00	0.079	20.5	MW CG Z
12.00	0.472	75748S	18.00	0.709	7.94	0.312	42.50	242.853	3.51	0.138	148.95	33.514	11.18	0.440	2.03	0.080	5.5	SST CG N
12.00	0.472	75749S	26.50	1.043	7.94	0.312	27.05	154.543	5.49	0.216	148.36	33.381	15.24	0.600	2.03	0.080	7.5	SST CG N
12.00	0.472	75750S	38.50	1.516	7.94	0.312	17.50	99.998	8.48	0.334	148.44	33.399	21.34	0.840	2.03	0.080	10.5	SST CG N
12.00	0.472	75751S	55.00	2.165	7.94	0.312	11.90	67.999	12.50	0.492	148.69	33.456	29.46	1.160	2.03	0.080	14.5	SST CG N
12.00	0.472	75752S	79.50	3.130	7.94	0.312	8.04	45.945	18.49	0.728	148.66	33.448	41.66	1.640	2.03	0.080	20.5	SST CG N
12.00	0.472	76209	15.00	0.591	8.00	0.315	54.00	308.350	3.88	0.153	209.74	47.151	10.00	0.394	2.00	0.079	5	MW CG N
12.00	0.472	76210	21.00	0.827	8.00	0.315	33.00	188.430	6.36	0.250	209.75	47.153	14.00	0.551	2.00	0.079	7	MW CG N
12.00	0.472	76211	31.00	1.220	8.00	0.315	20.00	114.200	10.49	0.413	209.74	47.151	20.00	0.787	2.00	0.079	10	MW CG N
12.00	0.472	76212	44.00	1.732	8.00	0.315	14.00	79.940	14.98	0.590	209.75	47.153	28.00	1.102	2.00	0.079	14	MW CG N
12.00	0.472	76213	63.00	2.480	8.00	0.315	9.10	51.960	23.00	0.906	209.30	47.053	40.00	1.575	2.00	0.079	20	MW CG N
12.30	0.484	76218	15.00	0.591	10.30	0.406	2.90	16.560	10.39	0.409	30.13	6.774	4.40	0.173	1.00	0.039	4.4	MW CG N
12.30	0.484	76219	15.00	0.591	9.30	0.366	13.00	74.230	7.19	0.283	93.42	21.001	7.80	0.307	1.50	0.059	5.2	MW CG N
12.30	0.484	76220	15.00	0.591	8.30	0.327	44.00	251.250	4.20	0.165	184.80	41.545	10.80	0.425	2.00	0.079	5.4	MW CG N
12.30	0.484	76221	20.00	0.787	10.30	0.406	2.10	11.990	14.35	0.565	30.13	6.774	5.40	0.213	1.00	0.039	5.4	MW CG N
12.30	0.484	76222	25.00	0.984	10.30	0.406	1.60	9.140	18.60	0.732	29.76	6.690	6.40	0.252	1.00	0.039	6.4	MW CG N
12.30	0.484	76223	25.00	0.984	9.30	0.366	6.80	38.830	13.00	0.512	88.40	19.873	12.00	0.472	1.50	0.059	8	MW CG




Metric Compression Springs

O.D. mm	Century Stock Number	Free Length mm	I.D. mm	Rate N/mm	Sugg Max. Defl. mm	Sugg Max. load N	Solid Length mm	Wire Dia. mm	Total Coils Mat'l	Ends E F sh								
Inches		Inches	Inches	Lbs./In.	Inches	Lbs.	Inches	Inches										
12.70	0.500	76243	45.00	1.772	10.30	0.406	1.50	8.570	31.44	1.238	47.16	10.602	13.56	0.534	1.20	0.047	11.3	MW CG N
12.70	0.500	76244	55.00	2.165	10.30	0.406	1.20	6.850	38.80	1.528	46.56	10.467	16.20	0.638	1.20	0.047	13.5	MW CG N
12.70	0.500	76245	65.00	2.559	10.30	0.406	1.00	5.710	46.04	1.813	46.04	10.350	18.96	0.746	1.20	0.047	15.8	MW CG N
12.70	0.500	76246	75.00	2.953	10.30	0.406	0.87	4.970	53.40	2.102	46.46	10.444	21.60	0.850	1.20	0.047	18	MW CG N
12.90	0.508	76247	20.00	0.787	9.30	0.366	17.00	97.070	8.30	0.327	141.10	31.721	11.70	0.461	1.80	0.071	6.5	MW CG N
12.90	0.508	76248	30.00	1.181	9.30	0.366	11.00	62.810	13.08	0.515	143.88	32.346	16.92	0.666	1.80	0.071	9.4	MW CG N
12.90	0.508	76249	40.00	1.575	9.30	0.366	7.70	43.970	18.22	0.717	140.29	31.539	21.78	0.857	1.80	0.071	12.1	MW CG N
12.90	0.508	76250	50.00	1.969	9.30	0.366	6.10	34.830	23.18	0.913	141.40	31.788	26.82	1.056	1.80	0.071	14.9	MW CG N
12.90	0.508	76251	60.00	2.362	9.30	0.366	5.00	28.550	28.14	1.108	140.70	31.631	31.86	1.254	1.80	0.071	17.7	MW CG N
12.90	0.508	76252	70.00	2.756	9.30	0.366	4.20	23.980	33.10	1.303	139.02	31.253	36.90	1.453	1.80	0.071	20.5	MW CG N
13.30	0.524	76253	20.00	0.787	10.30	0.406	7.80	44.540	11.00	0.433	85.80	19.289	9.00	0.354	1.50	0.059	6	MW CG N
13.30	0.524	76254	20.00	0.787	9.30	0.366	25.00	142.750	7.00	0.276	175.00	39.342	13.00	0.512	2.00	0.079	6.5	MW CG N
13.30	0.524	76255	30.00	1.181	10.30	0.406	4.80	27.410	17.25	0.679	82.80	18.614	12.75	0.502	1.50	0.059	8.5	MW CG N
13.30	0.524	76256	30.00	1.181	9.30	0.366	15.00	85.650	11.40	0.449	171.00	38.442	18.60	0.732	2.00	0.079	9.3	MW CG N
13.30	0.524	76257	35.00	1.378	8.30	0.327	42.11	240.450	8.29	0.326	349.13	78.488	23.25	0.915	2.50	0.098	9.3	MW CG N
13.30	0.524	76258	40.00	1.575	10.30	0.406	3.50	19.990	23.65	0.931	82.78	18.609	16.35	0.644	1.50	0.059	10.9	MW CG N
13.30	0.524	76259	40.00	1.575	9.30	0.366	11.00	62.810	16.00	0.630	176.00	39.566	24.00	0.945	2.00	0.079	12	MW CG N
13.30	0.524	76260	50.00	1.969	10.30	0.406	2.80	15.990	30.05	1.183	84.14	18.915	19.95	0.785	1.50	0.059	13.3	MW CG N
13.30	0.524	76261	50.00	1.969	9.30	0.366	8.80	50.250	20.40	0.803	179.52	40.358	29.60	1.165	2.00	0.079	14.8	MW CG N
13.30	0.524	76262	50.00	1.969	8.30	0.327	28.20	161.030	12.38	0.487	349.12	78.484	32.25	1.270	2.50	0.098	12.9	MW CG N
13.30	0.524	76263	60.00	2.362	10.30	0.406	2.30	13.130	36.30	1.429	83.49	18.769	23.70	0.933	1.50	0.059	15.8	MW CG N
13.30	0.524	76264	60.00	2.362	9.30	0.366	7.30	41.680	25.00	0.984	182.50	41.028	35.00	1.378	2.00	0.079	17.5	MW CG N
13.30	0.524	76265	65.00	2.559	8.30	0.327	21.20	121.060	16.47	0.648	349.12	78.486	41.25	1.624	2.50	0.098	16.5	MW CG N
13.30	0.524	76266	70.00	2.756	10.30	0.406	1.90	10.850	42.70	1.681	81.13	18.239	27.30	1.075	1.50	0.059	18.2	MW CG N
13.30	0.524	76267	70.00	2.756	9.30	0.366	6.20	35.400	29.40	1.157	182.28	40.978	40.60	1.598	2.00	0.079	20.3	MW CG N
13.30	0.524	76268	80.00	3.150	8.30	0.327	16.89	96.440	20.67	0.814	349.13	78.488	50.50	1.988	2.50	0.098	20.2	MW CG N
13.50	0.531	75570	24.00	0.950	11.50	0.453	1.51	8.640	18.34	0.722	27.72	6.237	5.50	0.217	1.00	0.039	5.5	MW CG Z
13.50	0.531	75571	36.50	1.440	11.50	0.453	0.96	5.500	28.80	1.134	27.71	6.234	7.50	0.295	1.00	0.039	7.5	MW CG Z
13.50	0.531	75572	55.50	2.190	11.50	0.453	0.62	3.560	44.53	1.753	27.71	6.235	10.50	0.413	1.00	0.039	10.5	MW CG Z
13.50	0.531	75573	80.50	3.170	11.50	0.453	0.42	2.420	65.48	2.578	27.72	6.236	14.50	0.571	1.00	0.039	14.5	MW CG Z
13.50	0.531	75574	115.00	4.530	11.50	0.453	0.29	1.630	94.51	3.721	27.02	6.080	20.50	0.807	1.00	0.039	20.5	MW CG Z
13.50	0.531	75570S	24.00	0.945	11.50	0.453	1.26	7.199	14.86	0.585	18.72	4.211	5.50	0.217	1.00	0.039	5.5	SST CG N
13.50	0.531	75571S	36.50	1.437	11.50	0.453	0.80	4.581	23.37	0.920	18.73	4.215	7.50	0.295	1.00	0.039	7.5	SST CG N
13.50	0.531	75572S	55.50	2.185	11.50	0.453	0.52	2.964	36.09	1.421	18.72	4.212	10.50	0.413	1.00	0.039	10.5	SST CG N
13.50	0.531	75573S	80.50	3.169	11.50	0.453	0.35	2.016	53.09	2.090	18.72	4.213	14.50	0.571	1.00	0.039	14.5	SST CG N
13.50	0.531	75574S	115.00	4.528	11.50	0.453	0.24	1.362	78.56	3.093	18.72	4.213	20.50	0.807	1.00	0.039	20.5	SST CG N
13.50	0.531	76269	22.00	0.866	11.50	0.453	1.70	9.710	16.21	0.638	27.55	6.193	5.00	0.197	1.00	0.039	5	MW CG N
13.50	0.531	76270	33.00	1.299	11.50	0.453	1.00	5.710	26.00	1.024	26.00	5.845	7.00	0.276	1.00	0.039	7	MW CG N
13.50	0.531	76271	50.00	1.969	11.50	0.453	0.65	3.710	40.00	1.575	26.00	5.845	10.00	0.394	1.00	0.039	10	MW CG N
13.50	0.531	76272	73.00	2.874	11.50	0.453	0.43	2.460	59.00	2.323	25.37	5.703	14.00	0.551	1.00	0.039	14	MW CG N
13.50	0.531	76273	107.00	4.213	11.50	0.453	0.29	1.660	87.00	3.425	25.23	5.672	20.00	0.787	1.00	0.039	20	MW CG N
13.51	0.532	75612	12.50	0.490	11.33	0.446	4.08	23.300	8.15	0.321	33.24	7.479	4.34	0.171	1.09	0.043	3.9	MW CG Z
13.51	0.532	75613	15.50	0.610	11.33	0.446	3.17	18.100	10.54	0.415	33.39	7.512	4.95	0.195	1.09	0.043	4.4	MW CG Z
13.51	0.532	75614	19.00	0.750	11.33	0.446	2.50	14.300	13.31	0.524	33.30	7.493	5.69	0.224	1.09	0.043	5.1	MW CG Z
13.51	0.532	75615	22.00	0.870	11.33	0.446	2.12	12.100	15.70	0.618	33.24	7.478	6.30	0.248	1.09	0.043	5.6	MW CG Z
13.51	0.532	75616	25.00	0.980	11.33	0.446	1.84	10.500	18.06	0.711	33.18	7.466	6.93	0.273	1.09	0.043	6.2	MW CG Z
13.51	0.532	75617	30.00	1.180	11.33	0.446	1.51	8.640	22.02	0.867	33.29	7.491	7.98	0.314	1.09	0.043	7.2	MW CG Z
13.51	0.532	75618	35.00	1.380	11.33	0.446	1.28	7.300	25.98	1.023	33.19	7.468	9.02	0.355	1.09	0.043	8	MW CG Z
13.51	0.532	75619	40.00	1.580	11.33	0.446	1.11	6.360	29.97	1.180	33.36	7.505	10.03	0.395	1.09	0.043	9.1	MW CG Z
13.51	0.532	75620	45.00	1.770	11.33	0.446	0.98	5.600	33.93	1.336	33.25	7.482	11.07	0.436	1.09	0.043	9.8	MW CG Z
13.51	0.532	75621	50.00	1.970	11.33	0.446	0.88	5.000	37.90	1.492	33.16	7.460	12.12	0.477	1.09	0.043	10.8	MW CG Z
13.51	0.532	75622	55.00	2.170	11.33	0.446	0.81	4.600	41.83	1.647	33.67	7.576	13.16	0.518	1.09	0.043	11.5	MW CG Z
13.51	0.532	75623	60.00	2.360	11.33	0.446	0.74	4.200	45.80	1.803	33.66	7.573	14.20	0.559	1.09	0.043	12.4	MW CG Z
13.51	0.532	75624	65.00	2.560	11.33	0.446	0.67	3.800	49.76	1.959	33.08	7.444	15.24	0.600	1.09	0.043	13.5	MW CG Z
13.51	0.532	75625	70.00	2.760	11.33	0.446	0.61	3.500	53.72	2.115	32.90	7.403	16.28	0.641	1.09	0.043	14.5	MW CG Z
13.51	0.532	75626	75.00	2.950	11.33	0.446	0.58	3.300	57.71	2.272	33.32	7.498	17.30					




Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg. Max. Defl. mm Inches	Sugg. Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends Mat'l	Finish Zinc									
13.75	0.541	75662	130.00	5.120	11.25	0.443	0.70	3.990	72.57	2.857	50.66	11.399	25.63	1.009	1.25	0.049	20.5	MW	CG	Z
13.75	0.541	75658S	27.00	1.063	11.25	0.443	3.08	17.576	11.23	0.442	34.53	7.769	6.88	0.271	1.25	0.049	5.5	SST	CG	N
13.75	0.541	75659S	41.50	1.634	11.25	0.443	1.96	11.185	17.65	0.695	34.55	7.774	9.38	0.369	1.25	0.049	7.5	SST	CG	N
13.75	0.541	75660S	62.50	2.461	11.25	0.443	1.27	7.237	27.28	1.074	34.55	7.773	13.13	0.517	1.25	0.049	10.5	SST	CG	N
13.75	0.541	75661S	90.50	3.563	11.25	0.443	0.86	4.921	40.13	1.580	34.56	7.775	18.13	0.714	1.25	0.049	14.5	SST	CG	N
13.75	0.541	75662S	130.00	5.118	11.25	0.443	0.58	3.325	59.39	2.338	34.55	7.774	25.63	1.009	1.25	0.049	20.5	SST	CG	N
13.75	0.541	76274	19.00	0.748	11.25	0.443	4.20	23.980	12.00	0.472	50.39	11.327	6.25	0.246	1.25	0.049	5	MW	CG	N
13.75	0.541	76275	29.00	1.142	11.25	0.443	2.50	14.280	20.15	0.793	50.39	11.327	8.75	0.344	1.25	0.049	7	MW	CG	N
13.75	0.541	76276	44.00	1.732	11.25	0.443	1.60	9.140	31.49	1.240	50.39	11.327	12.50	0.492	1.25	0.049	10	MW	CG	N
13.75	0.541	76277	63.00	2.480	11.25	0.443	1.10	6.280	45.50	1.791	50.05	11.252	17.50	0.689	1.25	0.049	14	MW	CG	N
13.75	0.541	76278	93.00	3.661	11.25	0.443	0.71	4.050	68.00	2.677	48.28	10.854	25.00	0.984	1.25	0.049	20	MW	CG	N
13.90	0.547	76279	15.00	0.591	10.30	0.406	22.00	125.620	6.27	0.247	137.85	30.990	8.64	0.340	1.80	0.071	4.8	MW	CG	N
13.90	0.547	76280	25.00	0.984	10.30	0.406	11.00	62.810	11.86	0.467	130.46	29.329	13.14	0.517	1.80	0.071	7.3	MW	CG	N
13.90	0.547	76281	35.00	1.378	10.30	0.406	7.80	44.540	17.54	0.691	136.81	30.757	17.46	0.687	1.80	0.071	9.7	MW	CG	N
13.90	0.547	76282	45.00	1.772	10.30	0.406	5.90	33.690	22.86	0.900	134.87	30.321	22.14	0.872	1.80	0.071	12.3	MW	CG	N
13.90	0.547	76283	55.00	2.165	10.30	0.406	4.70	26.840	28.36	1.117	133.29	29.965	26.64	1.049	1.80	0.071	14.8	MW	CG	N
13.90	0.547	76284	65.00	2.559	10.30	0.406	3.90	22.270	33.86	1.333	132.05	29.687	31.14	1.226	1.80	0.071	17.3	MW	CG	N
13.90	0.547	76285	75.00	2.953	10.30	0.406	3.40	19.410	39.36	1.550	133.82	30.085	35.64	1.403	1.80	0.071	19.8	MW	CG	N
14.10	0.555	75723	24.00	0.950	10.90	0.429	9.91	56.620	9.93	0.391	98.39	22.137	8.80	0.346	1.60	0.063	5.5	MW	CG	Z
14.10	0.555	75724	36.00	1.420	10.90	0.429	6.31	36.030	15.60	0.614	98.32	22.121	12.00	0.472	1.60	0.063	7.5	MW	CG	Z
14.10	0.555	75725	53.50	2.110	10.90	0.429	4.08	23.310	24.13	0.950	98.43	22.146	16.80	0.661	1.60	0.063	10.5	MW	CG	Z
14.10	0.555	75726	78.00	3.070	10.90	0.429	2.77	15.850	35.48	1.397	98.42	22.145	23.20	0.913	1.60	0.063	14.5	MW	CG	Z
14.10	0.555	75727	115.00	4.530	10.90	0.429	1.87	10.710	52.50	2.067	98.40	22.140	32.80	1.291	1.60	0.063	20.5	MW	CG	Z
14.10	0.555	75723S	24.00	0.945	10.90	0.429	8.26	47.180	8.15	0.321	67.31	15.145	8.80	0.346	1.60	0.063	5.5	SST	CG	N
14.10	0.555	75724S	36.00	1.417	10.90	0.429	5.26	30.024	12.83	0.505	67.39	15.162	12.00	0.472	1.60	0.063	7.5	SST	CG	N
14.10	0.555	75725S	53.50	2.106	10.90	0.429	3.40	19.427	19.81	0.780	67.35	15.153	16.80	0.661	1.60	0.063	10.5	SST	CG	N
14.10	0.555	75726S	78.00	3.071	10.90	0.429	2.31	13.210	29.16	1.148	67.40	15.165	23.20	0.913	1.60	0.063	14.5	SST	CG	N
14.10	0.555	75727S	115.00	4.528	10.90	0.429	1.56	8.926	43.16	1.699	67.40	15.165	32.80	1.291	1.60	0.063	20.5	SST	CG	N
14.10	0.555	76286	18.00	0.709	10.90	0.429	11.00	62.810	8.95	0.352	98.40	22.120	8.00	0.315	1.60	0.063	5	MW	CG	N
14.10	0.555	76287	26.00	1.024	10.90	0.429	6.80	38.830	14.47	0.570	98.40	22.122	11.20	0.441	1.60	0.063	7	MW	CG	N
14.10	0.555	76288	39.00	1.535	10.90	0.429	4.30	24.550	22.88	0.901	98.40	22.121	16.00	0.630	1.60	0.063	10	MW	CG	N
14.10	0.555	76289	57.00	2.244	10.90	0.429	2.80	15.990	34.60	1.362	96.88	21.780	22.40	0.882	1.60	0.063	14	MW	CG	N
14.10	0.555	76290	83.00	3.268	10.90	0.429	1.90	10.850	51.00	2.008	96.90	21.784	32.00	1.260	1.60	0.063	20	MW	CG	N
14.30	0.563	76291	15.00	0.591	10.30	0.406	32.00	182.720	5.60	0.220	179.20	40.286	9.40	0.370	2.00	0.079	4.7	MW	CG	N
14.30	0.563	76292	20.00	0.787	12.30	0.484	1.80	10.280	14.48	0.570	26.06	5.859	4.40	0.173	1.00	0.039	4.4	MW	CG	N
14.30	0.563	76293	25.00	0.984	12.30	0.484	1.40	7.990	18.62	0.733	26.06	5.859	5.20	0.205	1.00	0.039	5.2	MW	CG	N
14.30	0.563	76294	25.00	0.984	10.30	0.406	17.00	97.070	10.55	0.415	179.40	40.331	14.40	0.567	2.00	0.079	7.2	MW	CG	N
14.30	0.563	76296	35.00	1.378	12.30	0.484	0.92	5.250	28.30	1.114	26.04	5.853	6.70	0.264	1.00	0.039	6.7	MW	CG	N
14.30	0.563	76297	35.00	1.378	10.30	0.406	11.00	62.810	15.60	0.614	171.60	38.577	19.40	0.764	2.00	0.079	9.7	MW	CG	N
14.30	0.563	76298	45.00	1.772	12.30	0.484	0.70	4.000	36.80	1.449	25.76	5.791	8.20	0.323	1.00	0.039	8.2	MW	CG	N
14.30	0.563	76299	45.00	1.772	10.30	0.406	8.60	49.110	20.60	0.811	177.16	39.827	24.40	0.961	2.00	0.079	12.2	MW	CG	N
14.30	0.563	76301	55.00	2.165	12.30	0.484	0.56	3.200	45.30	1.783	25.37	5.703	9.70	0.382	1.00	0.039	9.7	MW	CG	N
14.30	0.563	76302	55.00	2.165	10.30	0.406	6.90	39.400	25.60	1.008	176.64	39.710	29.40	1.157	2.00	0.079	14.7	MW	CG	N
14.30	0.563	76304	65.00	2.559	12.30	0.484	0.47	2.680	53.70	2.114	25.24	5.674	11.30	0.445	1.00	0.039	11.3	MW	CG	N
14.30	0.563	76305	65.00	2.559	10.30	0.406	5.80	33.120	30.60	1.205	177.48	39.899	34.40	1.354	2.00	0.079	17.2	MW	CG	N
14.30	0.563	76306	75.00	2.953	12.30	0.484	0.40	2.280	62.20	2.449	24.88	5.593	12.80	0.504	1.00	0.039	12.8	MW	CG	N
14.30	0.563	76307	75.00	2.953	10.30	0.406	4.90	27.980	35.60	1.402	174.44	39.216	39.40	1.551	2.00	0.079	19.7	MW	CG	N
14.30	0.563	76309	85.00	3.346	12.30	0.484	0.35	2.000	70.70	2.783	24.75	5.563	14.30	0.563	1.00	0.039	14.3	MW	CG	N
14.50	0.571	75753	22.50	0.890	10.50	0.413	24.19	138.220	7.34	0.289	177.54	39.946	11.00	0.433	2.00	0.079	5.5	MW	CG	Z
14.50	0.571	75754	33.00	1.300	10.50	0.413	15.39	87.960	11.53	0.454	177.48	39.934	15.00	0.591	2.00	0.079	7.5	MW	CG	Z
14.50	0.571	75755	49.50	1.950	10.50	0.413	9.96	56.920	17.83	0.702	177.57	39.954	21.00	0.827	2.00	0.079	10.5	MW	CG	Z
14.50	0.571	75756	71.00	2.800	10.50	0.413	6.77	38.700	26.24	1.033	177.68	39.979	29.00	1.142	2.00	0.079	14.5	MW	CG	Z
14.50	0.571	75757	105.00	4.130	10.50	0.413	4.58	26.150	38.84	1.529	177.70	39.983	41.00	1.614	2.00	0.079	20.5	MW	CG	Z
14.50	0.571	75753S	22.50	0.886	10.44	0.411	21.63	123.583												




Metric Compression Springs

O.D. mm	Century Stock Number	Free Length mm	I.D. mm	Rate N/mm	Sugg Max. Defl. mm	Sugg Max. load N	Solid Length mm	Wire Dia. mm	Total Coils Mat'l	Ends E F n sh								
Inches		Inches	Inches	Lbs./In.	Inches	Lbs.	Inches	Inches	Mat'l									
15.00	0.591	76327	78.00	3.071	10.00	0.394	11.00	62.810	28.00	1.102	308.00	69.241	50.00	1.969	2.50	0.098	20	MW CG N
15.00	0.591	76328	98.00	3.858	10.00	0.394	11.00	62.810	28.63	1.127	314.94	70.802	51.25	2.018	2.50	0.098	20.5	MW CG N
15.01	0.591	75627	12.50	0.490	12.63	0.497	4.27	24.400	7.80	0.307	33.29	7.491	4.70	0.185	1.19	0.047	3.9	MW CG Z
15.01	0.591	75628	15.50	0.610	12.63	0.497	3.29	18.800	10.11	0.398	33.25	7.482	5.38	0.212	1.19	0.047	4.4	MW CG Z
15.01	0.591	75629	19.00	0.750	12.63	0.497	2.59	14.800	12.83	0.505	33.22	7.474	6.17	0.243	1.19	0.047	5.1	MW CG Z
15.01	0.591	75630	22.00	0.870	12.63	0.497	2.21	12.600	15.14	0.596	33.38	7.510	6.86	0.270	1.19	0.047	5.6	MW CG Z
15.01	0.591	75631	25.00	0.980	12.63	0.497	1.91	10.900	17.48	0.688	33.33	7.499	7.52	0.296	1.19	0.047	6.2	MW CG Z
15.01	0.591	75632	30.00	1.180	12.63	0.497	1.56	8.900	21.34	0.840	33.23	7.476	8.66	0.341	1.19	0.047	7.1	MW CG Z
15.01	0.591	75633	35.00	1.380	12.63	0.497	1.33	7.600	25.20	0.992	33.51	7.539	9.80	0.386	1.19	0.047	8	MW CG Z
15.01	0.591	75634	40.00	1.580	12.63	0.497	1.16	6.600	29.06	1.144	33.56	7.550	10.95	0.431	1.19	0.047	8.9	MW CG Z
15.01	0.591	75635	45.00	1.770	12.63	0.497	1.02	5.800	32.94	1.297	33.44	7.523	12.07	0.475	1.19	0.047	9.8	MW CG Z
15.01	0.591	75636	50.00	1.970	12.63	0.497	0.91	5.200	36.81	1.449	33.49	7.535	13.21	0.520	1.19	0.047	10.7	MW CG Z
15.01	0.591	75637	55.00	2.170	12.63	0.497	0.82	4.700	40.64	1.600	33.42	7.520	14.35	0.565	1.19	0.047	11.7	MW CG Z
15.01	0.591	75638	60.00	2.360	12.63	0.497	0.75	4.300	44.53	1.753	33.50	7.538	15.47	0.609	1.19	0.047	12.6	MW CG Z
15.01	0.591	75639	65.00	2.560	12.63	0.497	0.68	3.900	48.39	1.905	33.02	7.430	16.61	0.654	1.19	0.047	13.7	MW CG Z
15.01	0.591	75640	70.00	2.760	12.63	0.497	0.63	3.600	52.25	2.057	32.91	7.405	17.75	0.699	1.19	0.047	14.6	MW CG Z
15.01	0.591	75641	80.00	3.150	12.63	0.497	0.56	3.200	60.00	2.362	33.59	7.558	20.02	0.788	1.19	0.047	16.2	MW CG Z
15.01	0.591	75642	90.00	3.540	12.63	0.497	0.49	2.810	67.72	2.666	33.29	7.491	22.28	0.877	1.19	0.047	18.5	MW CG Z
15.01	0.591	75728	15.50	0.610	11.81	0.465	11.95	68.300	7.77	0.306	92.89	20.900	6.96	0.274	1.60	0.063	4.4	MW CG Z
15.01	0.591	75729	19.00	0.750	11.81	0.465	9.29	53.100	9.98	0.393	92.75	20.868	8.05	0.317	1.60	0.063	5	MW CG Z
15.01	0.591	75730	22.00	0.870	11.81	0.465	7.82	44.700	11.86	0.467	92.78	20.875	8.89	0.350	1.60	0.063	5.6	MW CG Z
15.01	0.591	75731	25.00	0.980	11.81	0.465	6.74	38.500	13.77	0.542	92.74	20.867	9.88	0.389	1.60	0.063	6.2	MW CG Z
15.01	0.591	75732	30.00	1.180	11.81	0.465	5.48	31.300	16.94	0.667	92.79	20.877	11.40	0.449	1.60	0.063	7.1	MW CG Z
15.01	0.591	75733	35.00	1.380	11.81	0.465	4.62	26.400	20.09	0.791	92.81	20.882	12.95	0.510	1.60	0.063	8.1	MW CG Z
15.01	0.591	75734	40.00	1.580	11.81	0.465	3.99	22.800	23.24	0.915	92.72	20.862	14.48	0.570	1.60	0.063	9	MW CG Z
15.01	0.591	75735	45.00	1.770	11.81	0.465	3.52	20.100	26.37	1.038	92.73	20.864	16.00	0.630	1.60	0.063	10	MW CG Z
15.01	0.591	75736	50.00	1.970	11.81	0.465	3.13	17.900	29.62	1.166	92.76	20.871	17.55	0.691	1.60	0.063	11	MW CG Z
15.01	0.591	75737	55.00	2.170	11.81	0.465	2.84	16.200	32.72	1.288	92.74	20.866	19.08	0.751	1.60	0.063	11.9	MW CG Z
15.01	0.591	75738	60.00	2.360	11.81	0.465	2.59	14.800	35.81	1.410	92.75	20.868	20.60	0.811	1.60	0.063	12.9	MW CG Z
15.01	0.591	75739	65.00	2.560	11.81	0.465	2.38	13.600	38.99	1.535	92.78	20.876	22.15	0.872	1.60	0.063	13.8	MW CG Z
15.01	0.591	75740	70.00	2.760	11.81	0.465	2.21	12.600	42.09	1.657	92.79	20.878	23.67	0.932	1.60	0.063	14.7	MW CG Z
15.01	0.591	75741	80.00	3.150	11.81	0.465	1.91	10.900	48.64	1.915	92.77	20.874	26.75	1.053	1.60	0.063	16.7	MW CG Z
15.01	0.591	75742	90.00	3.540	11.81	0.465	1.69	9.670	54.84	2.159	92.79	20.878	29.79	1.173	1.60	0.063	18.6	MW CG Z
15.01	0.591	75627S	12.50	0.492	12.63	0.497	3.56	20.300	7.72	0.304	27.43	6.171	4.70	0.185	1.19	0.047	3.9	SST CG N
15.01	0.591	75628S	15.50	0.610	12.63	0.497	2.75	15.700	9.98	0.393	27.42	6.170	5.38	0.212	1.19	0.047	4.4	SST CG N
15.01	0.591	75629S	19.00	0.748	12.63	0.497	2.17	12.400	12.65	0.498	27.44	6.175	6.17	0.243	1.19	0.047	5.1	SST CG N
15.01	0.591	75630S	22.00	0.866	12.63	0.497	1.84	10.500	14.94	0.588	27.44	6.174	6.86	0.270	1.19	0.047	5.6	SST CG N
15.01	0.591	75631S	25.00	0.984	12.63	0.497	1.59	9.100	17.25	0.679	27.46	6.179	7.52	0.296	1.19	0.047	6.2	SST CG N
15.01	0.591	75632S	30.00	1.181	12.63	0.497	1.30	7.400	21.18	0.834	27.43	6.172	8.66	0.341	1.19	0.047	7.1	SST CG N
15.01	0.591	75633S	35.00	1.378	12.63	0.497	1.10	6.300	24.89	0.980	27.44	6.174	9.80	0.386	1.19	0.047	8	SST CG N
15.01	0.591	75634S	40.00	1.575	12.63	0.497	0.96	5.500	28.52	1.123	27.45	6.177	10.95	0.431	1.19	0.047	8.9	SST CG N
15.01	0.591	75635S	45.00	1.772	12.63	0.497	0.84	4.800	32.66	1.286	27.44	6.173	12.07	0.475	1.19	0.047	9.9	SST CG N
15.01	0.591	75636S	50.00	1.969	12.63	0.497	0.75	4.300	36.47	1.436	27.44	6.175	13.21	0.520	1.19	0.047	10.8	SST CG N
15.01	0.591	75637S	55.00	2.165	12.63	0.497	0.68	3.900	40.21	1.583	27.44	6.174	14.35	0.565	1.19	0.047	11.7	SST CG N
15.01	0.591	75638S	60.00	2.362	12.63	0.497	0.63	3.600	43.56	1.715	27.44	6.174	15.47	0.609	1.19	0.047	12.5	SST CG N
15.01	0.591	75639S	65.00	2.559	12.63	0.497	0.58	3.300	47.52	1.871	27.44	6.174	16.61	0.654	1.19	0.047	13.5	SST CG N
15.01	0.591	75640S	70.00	2.756	12.63	0.497	0.53	3.000	52.25	2.057	27.43	6.171	17.75	0.699	1.19	0.047	14.6	SST CG N
15.01	0.591	75641S	80.00	3.150	12.63	0.497	0.46	2.600	60.00	2.362	27.29	6.141	20.02	0.788	1.19	0.047	16.6	SST CG N
15.01	0.591	75642S	90.00	3.543	12.63	0.497	0.41	2.341	67.01	2.638	27.45	6.176	22.28	0.877	1.19	0.047	18.5	SST CG N
15.01	0.591	75728S	15.50	0.610	11.81	0.465	9.97	56.900	6.38	0.251	63.48	14.282	6.96	0.274	1.60	0.063	4.4	SST CG N
15.01	0.591	75729S	19.00	0.748	11.81	0.465	7.76	44.300	8.20	0.323	63.60	14.309	8.05	0.317	1.60	0.063	5	SST CG N
15.01	0.591	75730S	22.00	0.866	11.81	0.465	6.52	37.200	9.75	0.384	63.49	14.285	8.89	0.350	1.60	0.063	5.6	SST CG N
15.01	0.591	75731S	25.00	0.984	11.81	0.465	5.62	32.100	11.30	0.445	63.49	14.285	9.88	0.389	1.60	0.063	6.2	SST CG N
15.01	0.591	75732S	30.00	1.181	11.81	0.465	4.57	26.100	13.92	0.548	63.57	14.303	11.40	0.449	1.60	0.063	7.1	SST CG N
15.01	0.591	75733S	35.00	1.378	11.81	0.465	3.85	22.000	16.51	0.650	63.56	14.300	12.95	0.510	1.60	0.063	8.1	SST CG N
15.01	0.591	75734S	40.00	1.575	11.81	0.465	3.33	19.000	19.10	0.752	63.50	14.288	14.48</td					




Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg. Max. Defl. mm Inches	Sugg. Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils Mat'l	Ends E	Finish Fns'h							
15.30	0.602	76343	75.00	2.953	12.30	0.484	1.40	7.990	51.60	2.031	72.24	16.240	23.40	0.921	1.50	0.059	15.6	MW CG N
15.30	0.602	76345	85.00	3.346	10.30	0.406	10.14	57.900	30.53	1.202	309.53	69.586	50.50	1.988	2.50	0.098	20.2	MW CG N
15.90	0.626	76346	20.00	0.787	12.30	0.484	12.00	68.520	10.14	0.399	121.72	27.363	9.36	0.369	1.80	0.071	5.2	MW CG N
15.90	0.626	76347	30.00	1.181	12.30	0.484	7.20	41.110	16.86	0.664	121.39	27.290	13.14	0.517	1.80	0.071	7.3	MW CG N
15.90	0.626	76348	40.00	1.575	12.30	0.484	5.20	29.690	23.26	0.916	120.95	27.191	16.74	0.659	1.80	0.071	9.3	MW CG N
15.90	0.626	76349	50.00	1.969	12.30	0.484	4.10	23.410	29.48	1.161	120.87	27.172	20.52	0.808	1.80	0.071	11.4	MW CG N
15.90	0.626	76350	60.00	2.362	12.30	0.484	3.30	18.840	35.70	1.406	117.81	26.485	24.30	0.957	1.80	0.071	13.5	MW CG N
15.90	0.626	76351	70.00	2.756	12.30	0.484	2.80	15.990	42.10	1.657	117.88	26.500	27.90	1.098	1.80	0.071	15.5	MW CG N
15.90	0.626	76352	80.00	3.150	12.30	0.484	2.50	14.280	48.50	1.909	121.25	27.258	31.50	1.240	1.80	0.071	17.5	MW CG N
16.30	0.642	76353	20.00	0.787	12.30	0.484	17.00	97.070	9.36	0.369	159.12	35.772	10.60	0.417	2.00	0.079	5.3	MW CG N
16.30	0.642	76354	30.00	1.181	12.30	0.484	10.00	57.100	15.20	0.598	152.00	34.171	14.80	0.583	2.00	0.079	7.4	MW CG N
16.30	0.642	76355	35.00	1.378	10.30	0.406	56.88	324.790	8.43	0.332	479.33	107.757	24.00	0.945	3.00	0.118	8	MW CG N
16.30	0.642	76356	40.00	1.575	12.30	0.484	7.40	42.260	21.00	0.827	155.40	34.935	19.00	0.748	2.00	0.079	9.5	MW CG N
16.30	0.642	76357	50.00	1.969	12.30	0.484	5.80	33.120	26.80	1.055	155.44	34.944	23.20	0.913	2.00	0.079	11.6	MW CG N
16.30	0.642	76358	50.00	1.969	10.30	0.406	37.50	214.130	12.78	0.503	479.33	107.757	33.30	1.311	3.00	0.118	11.1	MW CG N
16.30	0.642	76359	60.00	2.362	12.30	0.484	4.80	27.410	32.60	1.283	156.48	35.178	27.40	1.079	2.00	0.079	13.7	MW CG N
16.30	0.642	76360	65.00	2.559	10.30	0.406	28.21	161.080	16.99	0.669	479.32	107.755	42.30	1.665	3.00	0.118	14.1	MW CG N
16.30	0.642	76361	70.00	2.756	12.30	0.484	4.00	22.840	38.40	1.512	153.60	34.531	31.60	1.244	2.00	0.079	15.8	MW CG N
16.30	0.642	76362	80.00	3.150	12.30	0.484	3.50	19.990	44.20	1.740	154.70	34.778	35.80	1.409	2.00	0.079	17.9	MW CG N
16.30	0.642	76363	80.00	3.150	10.30	0.406	22.45	128.190	21.35	0.841	479.33	107.758	51.60	2.031	3.00	0.118	17.2	MW CG N
16.70	0.657	76364	25.00	0.984	14.30	0.563	2.10	11.990	17.82	0.702	37.43	8.414	5.64	0.222	1.20	0.047	4.7	MW CG N
16.70	0.657	76365	35.00	1.378	14.30	0.563	1.40	7.990	26.73	1.053	37.43	8.414	7.32	0.288	1.20	0.047	6.1	MW CG N
16.70	0.657	76366	45.00	1.772	14.30	0.563	1.10	6.280	34.03	1.340	37.43	8.414	8.88	0.350	1.20	0.047	7.4	MW CG N
16.70	0.657	76367	55.00	2.165	14.30	0.563	0.83	4.740	44.44	1.750	36.89	8.292	10.56	0.416	1.20	0.047	8.8	MW CG N
16.70	0.657	76368	65.00	2.559	14.30	0.563	0.70	4.000	52.88	2.082	37.02	8.322	12.12	0.477	1.20	0.047	10.1	MW CG N
16.70	0.657	76369	75.00	2.953	14.30	0.563	0.60	3.430	61.20	2.409	36.72	8.255	13.80	0.543	1.20	0.047	11.5	MW CG N
16.70	0.657	76370	85.00	3.346	14.30	0.563	0.53	3.030	69.64	2.742	36.91	8.297	15.36	0.605	1.20	0.047	12.8	MW CG N
17.25	0.679	75663	40.50	1.590	14.75	0.581	1.76	10.060	23.17	0.912	40.76	9.172	6.88	0.271	1.25	0.049	5.5	MW CG Z
17.25	0.679	75664	62.00	2.440	14.75	0.581	1.12	6.400	36.40	1.433	40.76	9.171	9.38	0.369	1.25	0.049	7.5	MW CG Z
17.25	0.679	75665	94.00	3.700	14.75	0.581	0.73	4.140	56.24	2.214	40.75	9.168	13.13	0.517	1.25	0.049	10.5	MW CG Z
17.25	0.679	75666	140.00	5.510	14.75	0.581	0.49	2.820	82.70	4.075	40.75	9.169	18.13	0.714	1.25	0.049	14.5	MW CG Z
17.25	0.679	75667	205.00	8.070	14.75	0.581	0.32	1.850	126.01	4.961	40.75	9.168	25.63	1.009	1.25	0.049	20.5	MW CG Z
17.25	0.679	75663S	40.50	1.594	14.75	0.581	1.47	8.381	18.95	0.746	27.79	6.252	6.88	0.271	1.25	0.049	5.5	SST CG N
17.25	0.679	75664S	62.00	2.441	14.75	0.581	0.93	5.333	29.77	1.172	27.78	6.250	9.38	0.369	1.25	0.049	7.5	SST CG N
17.25	0.679	75665S	94.00	3.701	14.75	0.581	0.60	3.451	46.03	1.812	27.79	6.253	13.13	0.517	1.25	0.049	10.5	SST CG N
17.25	0.679	75666S	140.00	5.512	14.75	0.581	0.41	2.347	67.67	2.664	27.79	6.252	18.13	0.714	1.25	0.049	14.5	SST CG N
17.25	0.679	75667S	205.00	8.071	14.75	0.581	0.27	1.539	103.18	4.062	27.78	6.251	25.63	1.009	1.25	0.049	20.5	SST CG N
17.25	0.679	76371	28.00	1.102	14.75	0.581	2.00	11.420	20.27	0.798	40.54	9.114	6.25	0.246	1.25	0.049	5	MW CG N
17.25	0.679	76372	42.00	1.654	14.75	0.581	1.20	6.850	33.25	1.309	39.90	8.970	8.75	0.344	1.25	0.049	7	MW CG N
17.25	0.679	76373	64.00	2.520	14.75	0.581	0.76	4.340	51.50	2.028	39.14	8.799	12.50	0.492	1.25	0.049	10	MW CG N
17.25	0.679	76374	93.00	3.661	14.75	0.581	0.51	2.910	75.50	2.972	38.51	8.656	17.50	0.689	1.25	0.049	14	MW CG N
17.25	0.679	76375	137.00	5.394	14.75	0.581	0.34	1.940	112.00	4.409	38.08	8.561	25.00	0.984	1.25	0.049	20	MW CG N
17.30	0.681	76376	20.00	0.787	14.30	0.563	5.40	30.830	12.55	0.494	67.75	15.230	6.60	0.260	1.50	0.059	4.4	MW CG N
17.30	0.681	76377	25.00	0.984	12.30	0.484	29.00	165.590	9.25	0.364	268.25	60.305	15.75	0.620	2.50	0.098	6.3	MW CG N
17.30	0.681	76378	30.00	1.181	14.30	0.563	3.40	19.410	19.93	0.785	67.75	15.231	8.85	0.348	1.50	0.059	5.9	MW CG N
17.30	0.681	76379	35.00	1.378	12.30	0.484	19.00	108.490	14.00	0.551	266.00	59.799	21.00	0.827	2.50	0.098	8.4	MW CG N
17.30	0.681	76380	40.00	1.575	14.30	0.563	2.40	13.700	28.23	1.111	67.75	15.231	11.25	0.443	1.50	0.059	7.5	MW CG N
17.30	0.681	76382	45.00	1.772	12.30	0.484	14.00	79.940	18.75	0.738	262.50	59.012	26.25	1.033	2.50	0.098	10.5	MW CG N
17.30	0.681	76383	50.00	1.969	14.30	0.563	1.90	10.850	35.66	1.404	67.75	15.231	13.50	0.531	1.50	0.059	9	MW CG N
17.30	0.681	76384	55.00	2.165	12.30	0.484	12.00	68.520	23.12	0.910	277.48	62.379	31.50	1.240	2.50	0.098	12.6	MW CG N
17.30	0.681	76386	60.00	2.362	14.30	0.563	1.50	8.570	44.25	1.742	66.38	14.922	15.75	0.620	1.50	0.059	10.5	MW CG N
17.30	0.681	76387	65.00	2.559	12.30	0.484	9.60	54.820	28.00	1.102	268.80	60.429	37.00	1.457	2.50	0.098	14.8	MW CG N
17.30	0.681	76388	70.00	2.756	14.30	0.563	1.30	7.420	51.85	2.041	67.41	15.153	18.15	0.715	1.50	0.059	12.1	MW CG N
17.30	0.681	76390	75.00	2.953	12.30	0.484	8.20	46.820	32.75	1.289	268.55	60.372	42.25	1.663	2.50	0.098	16.9	MW CG N
17.30	0.681	76391	80.00	3.150	14.30	0.563	1.10	6.280	59.45	2.341	65.40	14.701	20.55	0.809	1.50	0.059	13.7	MW CG N
17.60	0.693	75743	34.00	1.340	14.40	0.567	4.72	27.000	16.89	0.665	79.79	17.953	8.80					




Metric Compression Springs

O.D. mm	Century Stock Number	Free Length mm	I.D. mm	Rate N/mm	Sugg Max. Defl. mm	Sugg Max. load N	Solid Length mm	Wire Dia. mm	Total Coils Mat'l	Ends E	F nsh							
Inches		Inches	Inches	Lbs./In.	Inches	Lbs.	Inches	Inches										
18.00	0.709	75758S	30.00	1.181	13.94	0.549	10.29	58.783	9.98	0.393	102.68	23.102	11.18	0.440	2.03	0.080	5.5	SST CG N
18.00	0.709	75759S	45.00	1.772	13.94	0.549	6.55	37.407	15.70	0.618	102.75	23.118	15.24	0.600	2.03	0.080	7.5	SST CG N
18.00	0.709	75760S	68.00	2.677	13.94	0.549	4.24	24.205	24.26	0.955	102.74	23.116	21.34	0.840	2.03	0.080	10.5	SST CG N
18.00	0.709	75761S	98.00	3.858	13.94	0.549	2.88	16.459	35.69	1.405	102.78	23.125	29.46	1.160	2.03	0.080	14.5	SST CG N
18.00	0.709	75762S	145.00	5.709	13.94	0.549	1.95	11.121	52.81	2.079	102.76	23.121	41.66	1.640	2.03	0.080	20.5	SST CG N
18.00	0.709	76398	25.00	0.984	14.40	0.567	7.50	42.830	14.44	0.569	108.33	24.354	9.72	0.383	1.80	0.071	5.4	MW CG N
18.00	0.709	76399	33.00	1.299	14.00	0.551	8.00	45.680	18.14	0.714	145.10	32.619	14.00	0.551	2.00	0.079	7	MW CG N
18.00	0.709	76400	35.00	1.378	14.40	0.567	5.00	28.550	21.67	0.853	108.33	24.352	12.78	0.503	1.80	0.071	7.1	MW CG N
18.00	0.709	76401	45.00	1.772	14.40	0.567	3.70	21.130	29.16	1.148	107.89	24.255	15.84	0.624	1.80	0.071	8.8	MW CG N
18.00	0.709	76402	55.00	2.165	14.40	0.567	3.00	17.130	36.10	1.421	108.30	24.347	18.90	0.744	1.80	0.071	10.5	MW CG N
18.00	0.709	76403	65.00	2.559	14.40	0.567	2.50	14.280	43.04	1.694	107.60	24.189	21.96	0.865	1.80	0.071	12.2	MW CG N
18.00	0.709	76404	71.00	2.795	14.00	0.551	3.30	18.840	43.00	1.693	141.90	31.900	28.00	1.102	2.00	0.079	14	MW CG N
18.00	0.709	76405	75.00	2.953	14.40	0.567	2.20	12.560	49.24	1.939	108.33	24.353	24.84	0.978	1.80	0.071	13.8	MW CG N
18.29	0.720	75699	15.50	0.610	15.49	0.610	5.46	31.200	9.73	0.383	53.11	11.950	4.90	0.193	1.40	0.055	3.5	MW CG Z
18.29	0.720	75700	19.00	0.750	15.49	0.610	4.28	24.450	12.40	0.488	53.03	11.932	5.49	0.216	1.40	0.055	3.9	MW CG Z
18.29	0.720	75701	22.00	0.870	15.49	0.610	3.61	20.600	14.73	0.580	53.10	11.948	5.99	0.236	1.40	0.055	4.3	MW CG Z
18.29	0.720	75702	25.00	0.980	15.49	0.610	3.12	17.800	17.04	0.671	53.08	11.944	6.48	0.255	1.40	0.055	4.6	MW CG Z
18.29	0.720	75703	30.00	1.180	15.49	0.610	2.56	14.600	20.78	0.818	53.08	11.943	7.32	0.288	1.40	0.055	5.2	MW CG Z
18.29	0.720	75704	35.00	1.380	15.49	0.610	2.15	12.300	24.66	0.971	53.08	11.943	8.15	0.321	1.40	0.055	5.8	MW CG Z
18.29	0.720	75705	40.00	1.580	15.49	0.610	1.87	10.700	28.35	1.116	53.07	11.941	8.97	0.353	1.40	0.055	6.4	MW CG Z
18.29	0.720	75706	45.00	1.770	15.49	0.610	1.65	9.400	32.26	1.270	53.06	11.938	9.80	0.386	1.40	0.055	7	MW CG Z
18.29	0.720	75707	50.00	1.970	15.49	0.610	1.47	8.400	36.12	1.422	53.09	11.945	10.64	0.419	1.40	0.055	7.6	MW CG Z
18.29	0.720	75708	55.00	2.170	15.49	0.610	1.33	7.600	39.90	1.571	53.07	11.940	11.46	0.451	1.40	0.055	8.1	MW CG Z
18.29	0.720	75709	60.00	2.360	15.49	0.610	1.21	6.900	43.97	1.731	53.08	11.944	12.29	0.484	1.40	0.055	8.8	MW CG Z
18.29	0.720	75710	65.00	2.560	15.49	0.610	1.12	6.400	47.40	1.866	53.08	11.942	13.13	0.517	1.40	0.055	9.3	MW CG Z
18.29	0.720	75711	70.00	2.760	15.49	0.610	1.03	5.900	51.41	2.024	53.08	11.942	13.97	0.550	1.40	0.055	9.9	MW CG Z
18.29	0.720	75712	80.00	3.150	15.49	0.610	0.90	5.130	59.13	2.328	53.08	11.943	15.62	0.615	1.40	0.055	11.2	MW CG Z
18.29	0.720	75763	22.00	0.870	14.27	0.562	13.83	79.000	10.54	0.415	145.71	32.785	9.53	0.375	2.01	0.079	4.8	MW CG Z
18.29	0.720	75764	25.00	0.980	14.27	0.562	11.85	67.700	12.29	0.484	145.63	32.767	10.44	0.411	2.01	0.079	5.3	MW CG Z
18.29	0.720	75765	30.00	1.180	14.27	0.562	9.57	54.700	15.22	0.599	145.62	32.765	11.99	0.472	2.01	0.079	6.1	MW CG Z
18.29	0.720	75766	35.00	1.380	14.27	0.562	8.03	45.900	18.14	0.714	145.66	32.773	13.51	0.532	2.01	0.079	6.8	MW CG Z
18.29	0.720	75767	40.00	1.580	14.27	0.562	6.91	39.500	21.06	0.829	145.54	32.746	15.04	0.592	2.01	0.079	7.6	MW CG Z
18.29	0.720	75768	45.00	1.770	14.27	0.562	6.07	34.700	23.98	0.944	145.59	32.757	16.59	0.653	2.01	0.079	8.4	MW CG Z
18.29	0.720	75769	50.00	1.970	14.27	0.562	5.41	30.900	26.92	1.060	145.57	32.754	18.11	0.713	2.01	0.079	9.2	MW CG Z
18.29	0.720	75770	55.00	2.170	14.27	0.562	4.88	27.900	29.82	1.174	145.58	32.755	19.66	0.774	2.01	0.079	10	MW CG Z
18.29	0.720	75771	60.00	2.360	14.27	0.562	4.45	25.400	32.74	1.289	145.52	32.741	21.18	0.834	2.01	0.079	10.7	MW CG Z
18.29	0.720	75772	65.00	2.560	14.27	0.562	4.08	23.300	35.71	1.406	145.60	32.760	22.71	0.894	2.01	0.079	11.5	MW CG Z
18.29	0.720	75773	70.00	2.760	14.27	0.562	3.77	21.540	38.61	1.520	145.52	32.741	24.26	0.955	2.01	0.079	12.1	MW CG Z
18.29	0.720	75774	80.00	3.150	14.27	0.562	3.27	18.700	44.48	1.751	145.53	32.744	27.33	1.076	2.01	0.079	13.9	MW CG Z
18.29	0.720	75775	90.00	3.540	14.27	0.562	2.89	16.500	50.42	1.985	145.57	32.753	30.38	1.196	2.01	0.079	15.4	MW CG Z
18.29	0.720	75776	100.00	3.940	14.27	0.562	2.59	14.800	56.21	2.213	145.56	32.752	33.45	1.317	2.01	0.079	17	MW CG Z
18.29	0.720	75699S	15.50	0.610	15.49	0.610	4.55	26.000	7.90	0.311	35.94	8.086	4.90	0.193	1.40	0.055	3.5	SST CG N
18.29	0.720	75700S	19.00	0.748	15.49	0.610	3.57	20.367	10.08	0.397	35.94	8.086	5.49	0.216	1.40	0.055	3.9	SST CG N
18.29	0.720	75701S	22.00	0.866	15.49	0.610	3.01	17.200	11.94	0.470	35.93	8.084	5.99	0.236	1.40	0.055	4.3	SST CG N
18.29	0.720	75702S	25.00	0.984	15.49	0.610	2.61	14.900	13.77	0.542	35.89	8.076	6.48	0.255	1.40	0.055	4.6	SST CG N
18.29	0.720	75703S	30.00	1.181	15.49	0.610	2.12	12.100	16.97	0.668	35.92	8.083	7.32	0.288	1.40	0.055	5.2	SST CG N
18.29	0.720	75704S	35.00	1.378	15.49	0.610	1.79	10.200	20.12	0.792	35.90	8.078	8.15	0.321	1.40	0.055	5.8	SST CG N
18.29	0.720	75705S	40.00	1.575	15.49	0.610	1.56	8.900	23.06	0.908	35.92	8.081	8.97	0.353	1.40	0.055	6.4	SST CG N
18.29	0.720	75706S	45.00	1.772	15.49	0.610	1.37	7.800	26.31	1.036	35.92	8.081	9.80	0.386	1.40	0.055	7	SST CG N
18.29	0.720	75707S	50.00	1.969	15.49	0.610	1.23	7.000	29.31	1.154	35.90	8.078	10.64	0.419	1.40	0.055	7.6	SST CG N
18.29	0.720	75708S	55.00	2.165	15.49	0.610	1.10	6.300	32.59	1.283	35.92	8.083	11.46	0.451	1.40	0.055	8.2	SST CG N
18.29	0.720	75709S	60.00	2.362	15.49	0.610	1.02	5.800	35.38	1.393	35.91	8.079	12.29	0.484	1.40	0.055	8.7	SST CG N
18.29	0.720	75710S	65.00	2.559	15.49	0.610	0.93	5.300	38.74	1.525	35.92	8.083	13.13	0.517	1.40	0.055	9.3	SST CG N
18.29	0.720	75711S	70.00	2.756	15.49	0.610	0.86	4.900	41.89	1.649	35.91	8.080	13.97	0.550	1.40	0.055	9.9	SST CG N
18.29	0.720	75712S	80.00	3.150	15.49	0.610	0.75	4.273	48.03	1.891	35.91	8.080	15.62	0.615	1.40	0.055	11.2	SST CG N
18.29	0.720	75763S	22.00	0.866	14.23	0.560	12.16	69.506	8.33</									




Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg. Max. Defl. mm Inches	Sugg. Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends Mat'l	Finish N Zinc									
18.30	0.720	76414	70.00	2.756	12.30	0.484	18.00	102.780	24.10	0.949	433.82	97.526	45.30	1.783	3.00	0.118	15.1	MW	CG	N
18.30	0.720	76416	80.00	3.150	12.30	0.484	15.00	85.650	28.10	1.106	421.50	94.757	51.90	2.043	3.00	0.118	17.3	MW	CG	N
18.30	0.720	76417	85.00	3.346	12.30	0.484	15.15	86.510	28.64	1.127	433.82	97.527	50.40	1.984	3.00	0.118	16.8	MW	CG	N
18.40	0.724	76419	25.00	0.984	14.40	0.567	10.27	58.640	13.84	0.545	142.14	31.954	11.00	0.433	2.00	0.079	5.5	MW	CG	N
18.40	0.724	76420	35.00	1.378	14.40	0.567	7.00	39.970	20.31	0.799	142.14	31.953	14.60	0.575	2.00	0.079	7.3	MW	CG	N
18.40	0.724	76421	45.00	1.772	14.40	0.567	5.30	30.260	26.80	1.055	142.04	31.932	18.20	0.717	2.00	0.079	9.1	MW	CG	N
18.40	0.724	76422	55.00	2.165	14.40	0.567	4.20	23.980	33.40	1.315	140.28	31.536	21.60	0.850	2.00	0.079	10.8	MW	CG	N
18.40	0.724	76423	65.00	2.559	14.40	0.567	3.50	19.990	39.80	1.567	139.30	31.316	25.20	0.992	2.00	0.079	12.6	MW	CG	N
18.40	0.724	76424	75.00	2.953	14.40	0.567	3.00	17.130	46.40	1.827	139.20	31.293	28.60	1.126	2.00	0.079	14.3	MW	CG	N
18.40	0.724	76425	85.00	3.346	14.40	0.567	2.60	14.850	52.80	2.079	137.28	30.862	32.20	1.268	2.00	0.079	16.1	MW	CG	N
18.40	0.724	76426	100.00	3.937	14.40	0.567	2.20	12.560	62.60	2.465	137.72	30.961	37.40	1.472	2.00	0.079	18.7	MW	CG	N
18.50	0.728	76427	22.00	0.866	13.50	0.531	32.00	182.720	8.16	0.321	261.09	58.695	12.50	0.492	2.50	0.098	5	MW	CG	N
18.50	0.728	76428	28.00	1.102	13.50	0.531	28.00	159.880	9.33	0.367	261.10	58.698	13.75	0.541	2.50	0.098	5.5	MW	CG	N
18.50	0.728	76429	32.00	1.260	13.50	0.531	19.00	108.490	13.74	0.541	261.10	58.697	17.50	0.689	2.50	0.098	7	MW	CG	N
18.50	0.728	76430	41.00	1.614	13.50	0.531	18.00	102.780	14.51	0.571	261.09	58.695	18.75	0.738	2.50	0.098	7.5	MW	CG	N
18.50	0.728	76431	47.00	1.850	13.50	0.531	12.00	68.520	21.76	0.857	261.10	58.697	25.00	0.984	2.50	0.098	10	MW	CG	N
18.50	0.728	76432	61.00	2.402	13.50	0.531	11.00	62.810	23.74	0.934	261.10	58.697	26.25	1.033	2.50	0.098	10.5	MW	CG	N
18.50	0.728	76433	68.00	2.677	13.50	0.531	8.10	46.250	32.23	1.269	261.10	58.697	35.00	1.378	2.50	0.098	14	MW	CG	N
18.50	0.728	76434	88.00	3.465	13.50	0.531	7.80	44.540	33.47	1.318	261.10	58.697	36.25	1.427	2.50	0.098	14.5	MW	CG	N
18.50	0.728	76435	98.00	3.858	13.50	0.531	5.40	30.830	48.00	1.890	259.20	58.271	50.00	1.969	2.50	0.098	20	MW	CG	N
18.50	0.728	76436	130.00	5.118	13.50	0.531	5.30	30.260	49.26	1.939	261.09	58.696	51.25	2.018	2.50	0.098	20.5	MW	CG	N
19.18	0.755	76437	23.00	0.906	12.82	0.505	87.00	496.780	5.62	0.221	488.51	109.820	15.39	0.606	3.18	0.125	4.8	MW	CG	N
19.18	0.755	76438	28.00	1.102	12.82	0.505	75.00	428.260	6.51	0.256	488.55	109.830	16.85	0.663	3.18	0.125	5.3	MW	CG	N
19.18	0.755	76439	33.00	1.299	12.82	0.505	52.00	296.930	9.40	0.370	488.54	109.828	21.50	0.846	3.18	0.125	6.8	MW	CG	N
19.18	0.755	76440	40.00	1.575	12.82	0.505	47.00	268.380	10.39	0.409	488.52	109.823	23.12	0.910	3.18	0.125	7.3	MW	CG	N
19.18	0.755	76441	48.00	1.890	12.82	0.505	33.00	188.430	14.80	0.583	488.53	109.826	30.21	1.189	3.18	0.125	9.5	MW	CG	N
19.18	0.755	76442	59.00	2.323	12.82	0.505	31.00	177.010	15.76	0.620	488.53	109.826	31.74	1.250	3.18	0.125	10	MW	CG	N
19.18	0.755	76443	68.00	2.677	12.82	0.505	22.00	125.620	22.21	0.874	488.53	109.826	42.14	1.659	3.18	0.125	13.3	MW	CG	N
19.18	0.755	76444	84.00	3.307	12.82	0.505	21.00	119.910	23.26	0.916	488.54	109.829	43.82	1.725	3.18	0.125	13.8	MW	CG	N
19.18	0.755	76445	98.00	3.858	12.82	0.505	14.00	79.940	34.90	1.374	488.53	109.826	62.58	2.464	3.18	0.125	19.7	MW	CG	N
19.18	0.755	76446	120.00	4.724	12.82	0.505	14.00	79.940	34.90	1.374	488.53	109.826	62.58	2.464	3.18	0.125	19.7	MW	CG	N
19.30	0.760	76447	45.00	1.772	12.30	0.484	54.66	312.120	11.47	0.452	627.11	140.981	31.15	1.226	3.50	0.138	8.9	MW	CG	N
19.30	0.760	76448	60.00	2.362	12.30	0.484	39.70	226.690	15.80	0.622	627.14	140.987	40.25	1.585	3.50	0.138	11.5	MW	CG	N
19.30	0.760	76449	75.00	2.953	12.30	0.484	30.66	175.070	20.45	0.805	627.12	140.982	50.05	1.970	3.50	0.138	14.3	MW	CG	N
19.30	0.760	76450	90.00	3.543	12.30	0.484	25.14	143.550	24.95	0.982	627.14	140.987	59.50	2.343	3.50	0.138	17	MW	CG	N
19.40	0.764	76451	20.00	0.787	14.40	0.567	31.00	177.010	8.06	0.317	249.98	56.199	11.75	0.463	2.50	0.098	4.7	MW	CG	N
19.40	0.764	76452	25.00	0.984	16.40	0.646	3.60	20.560	16.86	0.664	60.71	13.647	6.75	0.266	1.50	0.098	4.5	MW	CG	N
19.40	0.764	76453	30.00	1.181	14.40	0.567	17.00	97.070	12.75	0.502	216.75	48.727	17.25	0.679	2.50	0.098	6.9	MW	CG	N
19.40	0.764	76454	35.00	1.378	16.40	0.646	2.50	14.280	24.28	0.956	60.71	13.647	8.55	0.337	1.50	0.098	5.7	MW	CG	N
19.40	0.764	76455	40.00	1.575	14.40	0.567	13.00	74.230	19.00	0.748	247.00	55.528	21.00	0.827	2.50	0.098	8.4	MW	CG	N
19.40	0.764	76456	45.00	1.772	16.40	0.646	1.80	10.280	33.73	1.328	60.71	13.647	10.50	0.413	1.50	0.098	7	MW	CG	N
19.40	0.764	76457	50.00	1.969	14.40	0.567	10.00	57.100	24.50	0.965	245.00	55.078	25.50	1.004	2.50	0.098	10.2	MW	CG	N
19.40	0.764	76458	55.00	2.165	16.40	0.646	1.40	7.990	42.55	1.675	59.57	13.392	12.45	0.490	1.50	0.098	8.3	MW	CG	N
19.40	0.764	76459	60.00	2.362	14.40	0.567	8.20	46.820	29.75	1.171	243.95	54.842	30.25	1.191	2.50	0.098	12.1	MW	CG	N
19.40	0.764	76460	65.00	2.559	16.40	0.646	1.20	6.850	50.59	1.992	60.71	13.647	14.25	0.561	1.50	0.098	9.5	MW	CG	N
19.40	0.764	76461	70.00	2.756	14.40	0.567	7.00	39.970	35.25	1.388	246.75	55.472	34.75	1.368	2.50	0.098	13.9	MW	CG	N
19.40	0.764	76462	75.00	2.953	16.40	0.646	1.00	5.710	58.80	2.315	58.80	13.219	16.20	0.638	1.50	0.098	10.8	MW	CG	N
19.40	0.764	76463	80.00	3.150	14.40	0.567	6.00	34.260	40.50	1.594	243.00	54.629	39.50	1.555	2.50	0.098	15.8	MW	CG	N
19.40	0.764	76464	85.00	3.346	16.40	0.567	0.91	5.200	66.71	2.626	60.71	13.647	18.00	0.709	1.50	0.098	12	MW	CG	N
20.00	0.787	76465	20.00	0.787	16.40	0.646	8.90	50.820	11.01	0.434	98.03	22.037	7.20	0.283	1.80	0.071	4	MW	CG	N
20.00	0.787	76466	30.00	1.181	16.40	0.646	5.30	30.260	18.50	0.728	98.02	22.037	9.72	0.383	1.80	0.071	5.4	MW	CG	N
20.00	0.787	76467	40.00	1.575	16.40	0.646	3.70	21.130	26.49	1.043	98.02	22.036	12.24	0.482	1.80	0.071	6.8	MW	CG	N
20.00	0.787	76468	50.00	1.969	16.40	0.646	2.90	16.560	33.80	1.331	98.02	22.036	14.76	0.581	1.80	0.071	8.2	MW	CG	




Metric Compression Springs

O.D. mm	Century Stock Number	Free Length mm	I.D. mm	Rate N/mm	Sugg Max. Defl. mm	Sugg Max. load N	Solid Length mm	Wire Dia. mm	Total Coils Mat'l	Ends E	Finish F nsh							
Inches		Inches	Inches	Lbs./In.	Inches	Lbs.	Inches	Inches										
20.40	0.803	76491	90.00	3.543	14.40	0.567	10.89	62.180	36.17	1.424	393.91	88.555	48.00	1.890	3.00	0.118	16	MW CG N
20.40	0.803	76492	90.00	3.543	12.40	0.488	42.30	241.540	20.11	0.792	850.57	191.215	62.40	2.457	4.00	0.157	15.6	MW CG N
21.40	0.843	76493	20.00	0.787	14.40	0.567	108.00	616.700	4.25	0.167	459.00	103.187	15.75	0.620	3.50	0.138	4.5	MW CG N
21.40	0.843	76494	25.00	0.984	16.40	0.646	19.00	108.490	12.02	0.473	228.30	51.325	12.75	0.502	2.50	0.098	5.1	MW CG N
21.40	0.843	76495	30.00	1.181	14.40	0.567	64.00	365.450	8.30	0.327	531.20	119.419	21.70	0.854	3.50	0.138	6.2	MW CG N
21.40	0.843	76496	35.00	1.378	16.40	0.646	12.00	68.520	17.75	0.699	213.00	47.884	17.25	0.679	2.50	0.098	6.9	MW CG N
21.40	0.843	76497	40.00	1.575	14.40	0.567	45.00	256.960	12.00	0.472	540.00	121.397	28.00	1.102	3.50	0.138	8	MW CG N
21.40	0.843	76498	45.00	1.772	16.40	0.646	9.40	53.680	24.25	0.955	227.95	51.245	20.75	0.817	2.50	0.098	8.3	MW CG N
21.40	0.843	76499	50.00	1.969	14.40	0.567	34.00	194.150	15.70	0.618	533.80	120.003	34.30	1.350	3.50	0.138	9.8	MW CG N
21.40	0.843	76500	55.00	2.165	16.40	0.646	7.50	42.830	30.25	1.191	226.88	51.004	24.75	0.974	2.50	0.098	9.9	MW CG N
21.40	0.843	76501	60.00	2.362	14.40	0.567	28.00	159.880	19.40	0.764	543.20	122.116	40.60	1.598	3.50	0.138	11.6	MW CG N
21.40	0.843	76502	65.00	2.559	16.40	0.646	6.30	35.970	36.24	1.427	228.30	51.324	28.75	1.132	2.50	0.098	11.5	MW CG N
21.40	0.843	76503	65.00	2.559	14.40	0.567	26.74	152.690	21.45	0.844	573.57	128.944	40.95	1.612	3.50	0.138	11.7	MW CG N
21.40	0.843	76504	70.00	2.756	14.40	0.567	24.00	137.040	23.10	0.909	554.40	124.634	46.90	1.846	3.50	0.138	13.4	MW CG N
21.40	0.843	76505	75.00	2.953	16.40	0.646	5.40	30.830	42.28	1.664	228.30	51.324	32.50	1.280	2.50	0.098	13	MW CG N
21.40	0.843	76506	80.00	3.150	14.40	0.567	21.00	119.910	27.31	1.075	573.57	128.944	52.50	2.067	3.50	0.138	15	MW CG N
21.40	0.843	76507	85.00	3.346	16.40	0.646	4.70	26.840	48.25	1.900	226.78	50.981	36.75	1.447	2.50	0.098	14.7	MW CG N
21.40	0.843	76508	90.00	3.543	14.40	0.567	18.00	102.780	30.85	1.215	555.30	124.836	59.15	2.329	3.50	0.138	16.9	MW CG N
21.40	0.843	76509	100.00	3.937	16.40	0.646	4.00	22.840	57.08	2.247	228.30	51.324	42.50	1.673	2.50	0.098	17	MW CG N
21.40	0.843	76510	100.00	3.937	14.40	0.567	16.63	94.960	34.49	1.358	573.57	128.944	61.60	2.425	3.50	0.138	17.6	MW CG N
21.60	0.850	76511	33.00	1.299	18.40	0.724	2.80	15.990	23.43	0.922	65.61	14.749	8.00	0.315	1.60	0.063	5	MW CG N
21.60	0.850	76512	48.00	1.890	18.40	0.724	2.40	13.700	27.34	1.076	65.61	14.749	8.80	0.346	1.60	0.063	5.5	MW CG N
21.60	0.850	76513	51.00	2.008	18.40	0.724	1.70	9.710	38.59	1.519	65.61	14.749	11.20	0.441	1.60	0.063	7	MW CG N
21.60	0.850	76514	74.00	2.913	18.40	0.724	1.50	8.570	43.74	1.722	65.61	14.749	12.00	0.472	1.60	0.063	7.5	MW CG N
21.60	0.850	76515	77.00	3.031	18.40	0.724	1.00	5.710	61.00	2.402	61.00	13.713	16.00	0.630	1.60	0.063	10	MW CG N
21.60	0.850	76516	110.00	4.331	18.40	0.724	0.98	5.600	66.95	2.636	65.61	14.749	16.80	0.661	1.60	0.063	10.5	MW CG N
21.60	0.850	76517	112.00	4.409	18.40	0.724	0.70	4.000	89.60	3.528	62.72	14.100	22.40	0.882	1.60	0.063	14	MW CG N
21.60	0.850	76518	165.00	6.496	18.40	0.724	0.67	3.830	97.92	3.855	65.61	14.749	23.20	0.913	1.60	0.063	14.5	MW CG N
21.60	0.850	76519	165.00	6.496	18.40	0.724	0.46	2.630	133.00	5.236	61.18	13.754	32.00	1.260	1.60	0.063	20	MW CG N
21.60	0.850	76520	240.00	9.449	18.40	0.724	0.45	2.570	145.79	5.740	65.61	14.749	32.80	1.291	1.60	0.063	20.5	MW CG N
22.00	0.866	76521	29.00	1.142	18.00	0.709	6.80	38.830	17.65	0.695	120.05	26.988	10.00	0.394	2.00	0.079	5	MW CG N
22.00	0.866	76522	41.00	1.614	18.00	0.709	5.80	33.120	20.70	0.815	120.05	26.988	11.00	0.433	2.00	0.079	5.5	MW CG N
22.00	0.866	76523	44.00	1.732	18.00	0.709	4.10	23.410	29.28	1.153	120.05	26.988	14.00	0.551	2.00	0.079	7	MW CG N
22.00	0.866	76524	62.00	2.441	18.00	0.709	3.70	21.130	32.45	1.277	120.05	26.988	15.00	0.591	2.00	0.079	7.5	MW CG N
22.00	0.866	76525	67.00	2.638	18.00	0.709	2.50	14.280	47.00	1.850	117.50	26.415	20.00	0.787	2.00	0.079	10	MW CG N
22.00	0.866	76526	94.00	3.701	18.00	0.709	2.40	13.700	50.02	1.969	120.05	26.988	21.00	0.827	2.00	0.079	10.5	MW CG N
22.00	0.866	76527	97.00	3.819	18.00	0.709	1.70	9.710	69.00	2.717	117.30	26.370	28.00	1.102	2.00	0.079	14	MW CG N
22.00	0.866	76528	135.00	5.315	18.00	0.709	1.60	9.140	75.03	2.954	120.05	26.988	29.00	1.142	2.00	0.079	14.5	MW CG N
22.00	0.866	76529	142.00	5.591	18.00	0.709	1.10	6.280	102.00	4.016	112.20	25.224	40.00	1.575	2.00	0.079	20	MW CG N
22.00	0.866	76530	200.00	7.874	18.00	0.709	1.10	6.280	109.14	4.297	120.05	26.988	41.00	1.614	2.00	0.079	20.5	MW CG N
22.40	0.882	76531	20.00	0.787	16.40	0.646	50.00	285.510	7.10	0.280	355.00	79.807	12.90	0.508	3.00	0.118	4.3	MW CG N
22.40	0.882	76532	25.00	0.984	18.40	0.724	8.40	47.970	14.05	0.553	118.00	26.528	8.60	0.339	2.00	0.079	4.3	MW CG N
22.40	0.882	76533	25.00	0.984	14.40	0.567	136.00	776.580	4.60	0.181	625.60	140.641	20.40	0.803	4.00	0.157	5.1	MW CG N
22.40	0.882	76534	30.00	1.181	16.40	0.646	29.00	165.590	12.30	0.484	356.70	80.189	17.70	0.697	3.00	0.118	5.9	MW CG N
22.40	0.882	76535	35.00	1.378	18.40	0.724	5.40	30.830	21.85	0.860	118.01	26.529	11.20	0.441	2.00	0.079	5.6	MW CG N
22.40	0.882	76536	35.00	1.378	14.40	0.567	88.00	502.490	7.80	0.307	686.40	154.309	27.20	1.071	4.00	0.157	6.8	MW CG N
22.40	0.882	76537	40.00	1.575	16.40	0.646	21.00	119.910	17.23	0.679	361.91	81.362	22.50	0.886	3.00	0.118	7.5	MW CG N
22.40	0.882	76538	45.00	1.772	14.40	0.567	65.00	371.160	11.00	0.433	715.00	160.738	34.00	1.339	4.00	0.157	8.5	MW CG N
22.40	0.882	76540	50.00	1.969	16.40	0.646	16.00	91.360	22.40	0.882	358.40	80.572	27.60	1.087	3.00	0.118	9.2	MW CG N
22.40	0.882	76541	50.00	1.969	14.40	0.567	62.67	357.850	12.55	0.494	786.32	176.772	34.00	1.339	4.00	0.157	8.5	MW CG N
22.40	0.882	76542	55.00	2.165	18.40	0.724	3.20	18.270	36.88	1.452	118.01	26.529	16.20	0.638	2.00	0.079	8.1	MW CG N
22.40	0.882	76543	55.00	2.165	14.40	0.567	51.00	291.220	13.80	0.543	703.80	158.221	41.20	1.622	4.00	0.157	10.3	MW CG N
22.40	0.882	76544	60.00	2.362	16.40	0.646	13.00	74.230	27.60	1.087	358.80	86.661	32.40	1.276	3.00	0.118	10.8	MW CG N
22.40	0.882	76545	65.00	2.559	14.40	0.567	42.00	239.830	17.00	0.669	714.00	160.514	48.00	1.890	4.00	0.157	12	MW CG N
22.40	0.882	76547	70.00	2.756	16.40	0.646	11.00	62.810	32.80	1.291	360.80	81.111	37.20	1.465	3.00	0.118		




Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils Mat'l	Ends E F nsh								
23.18	0.913	76570	58.00	2.283	16.82	0.662	17.00	97.070	24.26	0.955	412.49	92.731	30.05	1.183	3.18	0.125	9.5	MW CG N
23.18	0.913	76571	74.00	2.913	16.82	0.662	16.00	91.360	25.78	1.015	412.48	92.729	31.55	1.242	3.18	0.125	9.9	MW CG N
23.18	0.913	76572	82.00	3.228	16.82	0.662	11.00	62.810	37.50	1.476	412.49	92.731	42.99	1.693	3.18	0.125	13.5	MW CG N
23.18	0.913	76573	105.00	4.134	16.82	0.662	11.00	62.810	37.50	1.476	412.49	92.731	42.99	1.693	3.18	0.125	13.5	MW CG N
23.18	0.913	76574	120.00	4.724	16.82	0.662	7.40	42.260	55.74	2.195	412.48	92.730	60.80	2.394	3.18	0.125	19.1	MW CG N
23.18	0.913	76575	155.00	6.102	16.82	0.662	7.20	41.110	57.29	2.256	412.49	92.731	62.33	2.454	3.18	0.125	19.6	MW CG N
23.40	0.921	76576	20.00	0.787	18.40	0.724	23.00	131.330	9.13	0.359	210.01	47.213	9.75	0.384	2.50	0.098	3.9	MW CG N
23.40	0.921	76577	25.00	0.984	16.40	0.646	65.00	371.160	7.50	0.295	487.50	109.594	17.50	0.689	3.50	0.138	5	MW CG N
23.40	0.921	76578	30.00	1.181	18.40	0.724	13.00	74.230	16.15	0.636	210.00	47.210	13.25	0.522	2.50	0.098	5.3	MW CG N
23.40	0.921	76579	35.00	1.378	16.40	0.646	42.00	239.830	11.90	0.469	499.80	112.360	23.10	0.909	3.50	0.138	6.6	MW CG N
23.40	0.921	76580	40.00	1.575	18.40	0.724	9.30	53.100	22.58	0.889	210.00	47.211	16.75	0.659	2.50	0.098	6.7	MW CG N
23.40	0.921	76581	45.00	1.772	16.40	0.646	32.00	182.720	16.30	0.642	521.60	117.260	28.70	1.130	3.50	0.138	8.2	MW CG N
23.40	0.921	76582	50.00	1.969	18.40	0.724	7.30	41.680	28.77	1.133	210.00	47.210	20.00	0.787	2.50	0.098	8	MW CG N
23.40	0.921	76583	55.00	2.165	16.40	0.646	25.00	142.750	20.35	0.801	508.75	114.372	34.65	1.364	3.50	0.138	9.9	MW CG N
23.40	0.921	76584	60.00	2.362	18.40	0.724	5.90	33.690	35.59	1.401	210.01	47.211	23.75	0.935	2.50	0.098	9.5	MW CG N
23.40	0.921	76585	65.00	2.559	16.40	0.646	21.00	119.910	24.75	0.974	519.75	116.845	40.25	1.585	3.50	0.138	11.5	MW CG N
23.40	0.921	76586	70.00	2.756	18.40	0.724	4.90	27.980	42.75	1.683	209.48	47.092	27.25	1.073	2.50	0.098	10.9	MW CG N
23.40	0.921	76587	75.00	2.953	16.40	0.646	18.00	102.780	29.15	1.148	524.70	117.957	45.85	1.805	3.50	0.138	13.1	MW CG N
23.40	0.921	76588	80.00	3.150	18.40	0.724	4.30	24.550	48.84	1.923	210.00	47.211	30.50	1.201	2.50	0.098	12.2	MW CG N
23.40	0.921	76589	85.00	3.346	16.40	0.646	16.00	91.360	33.12	1.304	529.89	119.124	51.10	2.012	3.50	0.138	14.6	MW CG N
23.40	0.921	76590	90.00	3.543	18.40	0.724	3.80	21.700	55.26	2.176	210.00	47.211	34.00	1.339	2.50	0.098	13.6	MW CG N
23.40	0.921	76591	100.00	3.937	16.40	0.646	13.00	74.230	40.15	1.581	521.95	117.339	59.85	2.356	3.50	0.138	17.1	MW CG N
24.00	0.945	76592	28.00	1.102	16.00	0.630	109.00	622.410	6.80	0.268	740.76	166.530	20.00	0.787	4.00	0.157	5	MW CG N
24.00	0.945	76593	34.00	1.339	16.00	0.630	93.00	531.040	7.97	0.314	740.84	166.547	22.00	0.866	4.00	0.157	5.5	MW CG N
24.00	0.945	76594	49.00	1.929	16.00	0.630	59.00	336.900	12.56	0.494	740.80	166.539	30.00	1.181	4.00	0.157	7.5	MW CG N
24.00	0.945	76595	59.00	2.323	16.00	0.630	41.00	234.120	18.07	0.711	740.79	166.536	40.00	1.575	4.00	0.157	10	MW CG N
24.00	0.945	76596	72.00	2.835	16.00	0.630	38.00	216.990	19.50	0.768	740.81	166.541	42.00	1.654	4.00	0.157	10.5	MW CG N
24.00	0.945	76597	83.00	3.268	16.00	0.630	27.00	154.170	27.00	1.063	729.00	163.886	56.00	2.205	4.00	0.157	14	MW CG N
24.00	0.945	76598	105.00	4.134	16.00	0.630	26.00	148.460	28.49	1.122	740.82	166.543	58.00	2.283	4.00	0.157	14.5	MW CG N
24.00	0.945	76599	120.00	4.724	16.00	0.630	18.00	102.780	40.00	1.575	720.00	161.863	80.00	3.150	4.00	0.157	20	MW CG N
24.00	0.945	76600	150.00	5.906	16.00	0.630	18.00	102.780	41.16	1.620	740.81	166.540	82.00	3.228	4.00	0.157	20.5	MW CG N
24.40	0.961	76601	25.00	0.984	18.40	0.724	31.00	177.010	10.79	0.425	334.55	75.210	14.10	0.555	3.00	0.118	4.7	MW CG N
24.40	0.961	76602	30.00	1.181	16.40	0.646	88.00	502.490	8.00	0.315	704.00	158.266	22.00	0.866	4.00	0.157	5.5	MW CG N
24.40	0.961	76603	35.00	1.378	18.40	0.724	21.00	119.910	15.93	0.627	334.55	75.210	18.30	0.720	3.00	0.118	6.1	MW CG N
24.40	0.961	76604	40.00	1.575	16.40	0.646	60.00	342.610	11.20	0.441	672.00	151.072	28.80	1.134	4.00	0.157	7.2	MW CG N
24.40	0.961	76605	45.00	1.772	18.40	0.724	15.00	85.650	22.20	0.874	333.00	74.861	22.80	0.898	3.00	0.118	7.6	MW CG N
24.40	0.961	76606	50.00	1.969	16.40	0.646	46.00	262.670	14.80	0.583	680.80	153.050	35.20	1.386	4.00	0.157	8.8	MW CG N
24.40	0.961	76608	55.00	2.165	18.40	0.724	12.00	68.520	27.88	1.098	334.55	75.209	27.00	1.063	3.00	0.118	9	MW CG N
24.40	0.961	76609	55.00	2.165	16.40	0.646	42.10	240.400	17.34	0.683	730.18	164.152	36.40	1.433	4.00	0.157	9.1	MW CG N
24.40	0.961	76610	65.00	2.559	18.40	0.724	10.00	57.100	33.45	1.317	334.54	75.208	31.50	1.240	3.00	0.118	10.5	MW CG N
24.40	0.961	76612	70.00	2.756	16.40	0.646	31.00	177.010	22.40	0.882	694.90	156.107	47.60	1.874	4.00	0.157	11.9	MW CG N
24.40	0.961	76613	75.00	2.953	18.40	0.724	8.50	48.540	39.00	1.535	331.50	74.524	36.00	1.417	3.00	0.118	12	MW CG N
24.40	0.961	76614	80.00	3.150	16.40	0.646	27.00	154.170	26.00	1.024	702.00	157.816	54.00	2.126	4.00	0.157	13.5	MW CG N
24.40	0.961	76616	85.00	3.346	18.40	0.724	7.40	42.260	44.80	1.764	331.52	74.529	40.20	1.583	3.00	0.118	13.4	MW CG N
24.40	0.961	76617	90.00	3.543	16.40	0.646	24.00	137.040	29.60	1.165	710.40	159.704	60.40	2.378	4.00	0.157	15.1	MW CG N
24.40	0.961	76618	100.00	3.937	18.40	0.724	6.20	35.400	53.20	2.094	329.84	74.151	46.80	1.843	3.00	0.118	15.6	MW CG N
24.40	0.961	76619	100.00	3.937	16.40	0.646	22.31	127.390	32.73	1.289	730.16	164.147	61.60	2.425	4.00	0.157	15.4	MW CG N
24.40	0.961	76621	110.00	4.331	16.40	0.646	19.00	108.490	37.20	1.465	706.80	158.895	72.80	2.866	4.00	0.157	18.2	MW CG N
24.40	0.961	76622	120.00	4.724	18.40	0.724	5.10	29.120	64.50	2.539	328.95	73.951	55.50	2.185	3.00	0.118	18.5	MW CG N
25.40	1.000	76623	20.00	0.787	18.40	0.724	77.00	439.680	6.35	0.250	488.95	109.920	13.65	0.537	3.50	0.138	3.9	MW CG N
25.40	1.000	76624	25.00	0.984	20.40	0.803	15.00	85.650	12.96	0.510	194.37	43.696	10.50	0.413	2.50	0.098	4.2	MW CG N
25.40	1.000	76625	30.00	1.181	18.40	0.724	43.00	245.540	11.10	0.437	477.30	107.301	18.90	0.744	3.50	0.138	5.4	MW CG N
25.40	1.000	76626	35.00	1.378	20.40	0.803	9.80	55.960	19.83	0.781	194.37	43.697	13.50	0.531	2.50	0.098	5.4	MW CG N
25.40	1.000	76627	35.00	1.378	16.40	0.646	112.00	639.540	7.55	0.297	845.60	190.099	27.45	1.081	4.50	0.177	6.1	MW CG N
25.40	1.000	76628	40.00	1.575	18.40	0.724	30.00	171.300	15.85	0.624	475.50	106.897	24.15	0.951	3.50	0.138	6.9	MW CG N
2																		




Metric Compression Springs

O.D. mm	Century Stock Number	Free Length mm	I.D. mm	Rate N/mm	Sugg Max. Defl. mm	Sugg Max. load N	Solid Length mm	Wire Dia. mm	Total Coils	Ends	F n sh							
Inches		Inches	Inches	Lbs./In.	Inches	Lbs.	Inches	mm	Mat'l									
26.40	1.039	76649	25.00	0.984	18.40	0.724	93.00	531.040	7.00	0.276	651.00	146.351	18.00	0.709	4.00	0.157	4.5	MW CG N
26.40	1.039	76650	30.00	1.181	20.40	0.803	22.00	125.620	14.13	0.556	310.93	69.899	15.00	0.591	3.00	0.118	5	MW CG N
26.40	1.039	76651	35.00	1.378	18.40	0.724	58.00	331.190	11.00	0.433	638.00	143.428	24.00	0.945	4.00	0.157	6	MW CG N
26.40	1.039	76652	40.00	1.575	20.40	0.803	15.00	85.650	20.73	0.816	310.94	69.901	18.90	0.744	3.00	0.118	6.3	MW CG N
26.40	1.039	76653	45.00	1.772	18.40	0.724	42.00	239.830	15.00	0.591	630.00	141.630	30.00	1.181	4.00	0.157	7.5	MW CG N
26.40	1.039	76654	50.00	1.969	20.40	0.803	12.00	68.520	25.91	1.020	310.93	69.900	22.50	0.886	3.00	0.118	7.5	MW CG N
26.40	1.039	76655	55.00	2.165	18.40	0.724	34.00	194.150	19.40	0.764	659.60	148.284	35.60	1.402	4.00	0.157	8.9	MW CG N
26.40	1.039	76656	55.00	2.165	16.40	0.646	105.36	601.620	11.72	0.461	1234.29	277.480	40.00	1.575	5.00	0.197	8	MW CG N
26.40	1.039	76657	60.00	2.362	20.40	0.803	9.40	53.680	33.08	1.302	310.93	69.901	26.70	1.051	3.00	0.118	8.9	MW CG N
26.40	1.039	76658	65.00	2.559	18.40	0.724	28.00	159.880	23.80	0.937	666.40	149.813	41.20	1.622	4.00	0.157	10.3	MW CG N
26.40	1.039	76659	70.00	2.756	20.40	0.803	8.00	45.680	38.87	1.530	310.93	69.899	30.30	1.193	3.00	0.118	10.1	MW CG N
26.40	1.039	76660	70.00	2.756	16.40	0.646	80.02	456.930	15.42	0.607	1234.23	277.466	49.50	1.949	5.00	0.197	9.9	MW CG N
26.40	1.039	76661	75.00	2.953	18.40	0.724	24.00	137.040	27.80	1.094	667.20	149.993	47.20	1.858	4.00	0.157	11.8	MW CG N
26.40	1.039	76662	80.00	3.150	20.40	0.803	6.80	38.830	45.50	1.791	309.40	69.556	34.50	1.358	3.00	0.118	11.5	MW CG N
26.40	1.039	76663	85.00	3.346	18.40	0.724	21.00	119.910	31.80	1.252	667.80	150.128	53.20	2.094	4.00	0.157	13.3	MW CG N
26.40	1.039	76664	85.00	3.346	16.40	0.646	63.85	364.590	19.33	0.761	1234.22	277.464	59.50	2.343	5.00	0.197	11.9	MW CG N
26.40	1.039	76665	90.00	3.543	20.40	0.803	6.10	34.830	50.97	2.007	310.93	69.900	38.10	1.500	3.00	0.118	12.7	MW CG N
26.40	1.039	76666	100.00	3.937	18.40	0.724	17.00	97.070	38.40	1.512	652.80	146.755	61.60	2.425	4.00	0.157	15.4	MW CG N
26.40	1.039	76667	100.00	3.937	16.40	0.646	53.57	305.890	23.04	0.907	1234.25	277.471	69.00	2.717	5.00	0.197	13.8	MW CG N
26.40	1.039	76668	110.00	4.331	20.40	0.803	4.90	27.980	63.46	2.498	310.93	69.900	45.90	1.807	3.00	0.118	15.3	MW CG N
26.40	1.039	76669	120.00	4.724	18.40	0.724	14.00	79.940	46.80	1.843	655.20	147.295	73.20	2.882	4.00	0.157	18.3	MW CG N
26.40	1.039	76670	130.00	5.118	20.40	0.803	4.10	23.410	75.84	2.986	310.93	69.900	53.40	2.102	3.00	0.118	17.8	MW CG N
27.00	1.063	76671	40.00	1.575	23.00	0.906	3.50	19.990	28.19	1.110	98.66	22.180	10.00	0.394	2.00	0.079	5	MW CG N
27.00	1.063	76672	58.00	2.283	23.00	0.906	3.00	17.130	32.89	1.295	98.66	22.180	11.00	0.433	2.00	0.079	5.5	MW CG N
27.00	1.063	76673	62.00	2.441	23.00	0.906	2.10	11.990	46.98	1.850	98.66	22.180	14.00	0.551	2.00	0.079	7	MW CG N
27.00	1.063	76674	89.00	3.504	23.00	0.906	1.90	10.850	51.93	2.044	98.66	22.179	15.00	0.591	2.00	0.079	7.5	MW CG N
27.00	1.063	76675	94.00	3.701	23.00	0.906	1.30	7.420	74.00	2.913	96.20	21.627	20.00	0.787	2.00	0.079	10	MW CG N
27.00	1.063	76676	135.00	5.315	23.00	0.906	1.20	6.850	82.22	3.237	98.66	22.180	21.00	0.827	2.00	0.079	10.5	MW CG N
27.00	1.063	76677	136.00	5.354	23.00	0.906	0.87	4.970	108.00	4.252	93.96	21.123	28.00	1.102	2.00	0.079	14	MW CG N
27.00	1.063	76678	195.00	7.677	23.00	0.906	0.83	4.740	118.87	4.680	98.66	22.180	29.00	1.142	2.00	0.079	14.5	MW CG N
27.00	1.063	76679	200.00	7.874	23.00	0.906	0.55	3.140	158.00	6.220	86.90	19.536	42.00	1.654	2.00	0.079	21	MW CG N
27.00	1.063	76680	290.00	11.417	23.00	0.906	0.56	3.200	176.18	6.936	98.66	22.180	41.00	1.614	2.00	0.079	20.5	MW CG N
27.40	1.079	76681	25.00	0.984	20.40	0.803	49.00	279.800	9.37	0.369	459.13	103.217	15.05	0.593	3.50	0.138	4.3	MW CG N
27.40	1.079	76682	30.00	1.181	18.40	0.724	113.00	645.250	7.05	0.278	796.65	179.094	22.95	0.904	4.50	0.177	5.1	MW CG N
27.40	1.079	76683	35.00	1.378	20.40	0.803	30.00	171.300	15.05	0.593	451.50	101.501	19.95	0.785	3.50	0.138	5.7	MW CG N
27.40	1.079	76684	40.00	1.575	18.40	0.724	78.00	445.390	10.75	0.423	838.50	188.502	29.25	1.152	4.50	0.177	6.5	MW CG N
27.40	1.079	76685	45.00	1.772	20.40	0.803	23.00	131.330	19.96	0.786	459.13	103.216	24.50	0.965	3.50	0.138	7	MW CG N
27.40	1.079	76686	50.00	1.969	18.40	0.724	58.00	331.190	14.00	0.551	812.00	182.545	36.00	1.417	4.50	0.177	8	MW CG N
27.40	1.079	76687	55.00	2.165	20.40	0.803	18.00	102.780	25.51	1.004	459.13	103.216	29.05	1.144	3.50	0.138	8.3	MW CG N
27.40	1.079	76688	60.00	2.362	18.40	0.724	47.00	268.380	17.70	0.697	831.90	187.019	42.30	1.665	4.50	0.177	9.4	MW CG N
27.40	1.079	76689	65.00	2.559	20.40	0.803	15.00	85.650	30.61	1.205	459.12	103.214	33.95	1.337	3.50	0.138	9.7	MW CG N
27.40	1.079	76690	70.00	2.756	18.40	0.724	40.00	228.410	21.40	0.843	856.00	192.437	48.60	1.913	4.50	0.177	10.8	MW CG N
27.40	1.079	76691	75.00	2.953	20.40	0.803	13.00	74.230	35.32	1.390	459.12	103.215	38.50	1.516	3.50	0.138	11	MW CG N
27.40	1.079	76692	80.00	3.150	18.40	0.724	34.00	194.150	24.65	0.970	838.10	188.412	55.35	2.179	4.50	0.177	12.3	MW CG N
27.40	1.079	76693	85.00	3.346	20.40	0.803	11.00	62.810	41.74	1.643	459.12	103.214	43.05	1.695	3.50	0.138	12.3	MW CG N
27.40	1.079	76694	90.00	3.543	18.40	0.724	30.00	171.300	28.80	1.134	864.00	194.235	61.20	2.409	4.50	0.177	13.6	MW CG N
27.40	1.079	76695	100.00	3.937	20.40	0.803	9.20	52.530	49.90	1.965	459.12	103.214	49.70	1.957	3.50	0.138	14.2	MW CG N
27.40	1.079	76696	110.00	4.331	18.40	0.724	24.00	137.040	35.75	1.407	858.00	192.886	74.25	2.923	4.50	0.177	16.5	MW CG N
27.40	1.079	76697	130.00	5.118	18.40	0.724	20.00	114.200	43.15	1.699	863.00	194.010	86.85	3.419	4.50	0.177	19.3	MW CG N
27.50	1.083	76698	36.00	1.417	22.50	0.886	8.50	48.540	21.21	0.835	180.26	40.524	12.50	0.492	2.50	0.098	5	MW CG N
27.50	1.083	76699	49.00	1.929	22.50	0.886	7.30	41.680	24.69	0.972	180.26	40.524	13.75	0.541	2.50	0.098	5.5	MW CG N
27.50	1.083	76700	54.00	2.126	22.50	0.886	5.10	29.120	35.35	1.392	180.26	40.524	17.50	0.689	2.50	0.098	7	MW CG N
27.50	1.083	76701	75.00	2.953	22.50	0.886	4.60	26.270	39.19	1.543	180.26	40.524	18.75	0.738	2.50	0.098	7.5	MW CG N
27.50	1.083	76702	82.00	3.228	22.50	0.886	3.20	18.270	56.33	2.218	180.26	40.524	25.00	0.984	2.50	0.098	10	MW CG N
27.50	1.083	76703	115.00	4.528	22.50	0.886	3.00	17.130	60.09	2.366	180.26	40.524	2					




Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends Mat'l	Finish N Zinc									
28.40	1.118	76728	75.00	2.953	18.40	0.724	59.69	340.840	19.44	0.765	1160.14	260.809	50.50	1.988	5.00	0.197	10.1	MW	CG	N
28.40	1.118	76729	80.00	3.150	20.40	0.803	19.00	108.490	33.56	1.321	637.70	143.360	46.40	1.827	4.00	0.157	11.6	MW	CG	N
28.40	1.118	76730	90.00	3.543	20.40	0.803	16.00	91.360	38.00	1.496	608.00	136.684	52.00	2.047	4.00	0.157	13	MW	CG	N
28.40	1.118	76731	90.00	3.543	18.40	0.724	48.35	276.090	24.00	0.945	1160.16	260.814	60.00	2.362	5.00	0.197	12	MW	CG	N
28.40	1.118	76732	110.00	4.331	20.40	0.803	13.00	74.230	47.60	1.874	618.80	139.112	62.40	2.457	4.00	0.157	15.6	MW	CG	N
28.40	1.118	76733	110.00	4.331	18.40	0.724	38.68	220.870	29.99	1.181	1160.13	260.808	72.50	2.854	5.00	0.197	14.5	MW	CG	N
28.40	1.118	76734	130.00	5.118	20.40	0.803	11.00	62.810	56.80	2.236	624.80	140.461	73.20	2.882	4.00	0.157	18.3	MW	CG	N
28.50	1.122	76735	25.00	0.984	22.50	0.886	24.00	137.040	12.06	0.475	289.42	65.063	12.30	0.484	3.00	0.118	4.1	MW	CG	N
28.50	1.122	76736	35.00	1.378	22.50	0.886	16.00	91.360	18.09	0.712	289.41	65.062	15.60	0.614	3.00	0.118	5.2	MW	CG	N
28.50	1.122	76737	45.00	1.772	22.50	0.886	12.00	68.520	24.12	0.949	289.40	65.061	18.90	0.744	3.00	0.118	6.3	MW	CG	N
28.50	1.122	76738	55.00	2.165	22.50	0.886	9.00	51.390	32.16	1.266	289.41	65.063	22.50	0.886	3.00	0.118	7.5	MW	CG	N
28.50	1.122	76739	65.00	2.559	22.50	0.886	7.50	42.830	38.59	1.519	289.41	65.062	25.80	1.016	3.00	0.118	8.6	MW	CG	N
28.50	1.122	76740	75.00	2.953	22.50	0.886	6.40	36.540	45.22	1.780	289.41	65.062	29.40	1.157	3.00	0.118	9.8	MW	CG	N
28.50	1.122	76741	85.00	3.346	22.50	0.886	5.50	31.410	52.00	2.047	286.00	64.295	33.00	1.299	3.00	0.118	11	MW	CG	N
28.50	1.122	76742	100.00	3.937	22.50	0.886	4.70	26.840	61.58	2.424	289.41	65.061	38.10	1.500	3.00	0.118	12.7	MW	CG	N
28.50	1.122	76743	120.00	4.724	22.50	0.886	3.80	21.700	75.00	2.953	285.00	64.071	45.00	1.772	3.00	0.118	15	MW	CG	N
29.00	1.142	76744	33.00	1.299	21.00	0.827	56.00	319.770	11.17	0.440	625.69	140.660	20.00	0.787	4.00	0.157	5	MW	CG	N
29.00	1.142	76745	41.00	1.614	21.00	0.827	48.00	274.090	13.04	0.513	625.73	140.669	22.00	0.866	4.00	0.157	5.5	MW	CG	N
29.00	1.142	76746	48.00	1.890	21.00	0.827	33.00	188.430	18.96	0.746	625.71	140.666	28.00	1.102	4.00	0.157	7	MW	CG	N
29.00	1.142	76747	61.00	2.402	21.00	0.827	30.00	171.300	20.86	0.821	625.71	140.665	30.00	1.181	4.00	0.157	7.5	MW	CG	N
29.00	1.142	76748	90.00	3.543	21.00	0.827	20.00	114.200	31.29	1.232	625.70	140.663	42.00	1.654	4.00	0.157	10.5	MW	CG	N
29.00	1.142	76749	100.00	3.937	21.00	0.827	14.00	79.940	44.00	1.732	616.00	138.482	56.00	2.205	4.00	0.157	14	MW	CG	N
29.00	1.142	76750	130.00	5.118	21.00	0.827	13.00	74.230	48.13	1.895	625.70	140.664	58.00	2.283	4.00	0.157	14.5	MW	CG	N
29.00	1.142	76751	146.00	5.748	21.00	0.827	9.30	53.100	66.00	2.598	613.80	137.988	80.00	3.150	4.00	0.157	20	MW	CG	N
29.00	1.142	76752	185.00	7.283	21.00	0.827	9.00	51.390	69.52	2.737	625.71	140.665	82.00	3.228	4.00	0.157	20.5	MW	CG	N
29.40	1.157	76753	35.00	1.378	20.40	0.803	78.00	445.390	10.25	0.404	799.50	179.735	24.75	0.974	4.50	0.177	5.5	MW	CG	N
29.40	1.157	76754	45.00	1.772	20.40	0.803	57.00	325.480	14.40	0.567	820.80	184.523	30.60	1.205	4.50	0.177	6.8	MW	CG	N
29.40	1.157	76755	55.00	2.165	20.40	0.803	44.00	251.250	18.10	0.713	796.40	179.038	36.90	1.453	4.50	0.177	8.2	MW	CG	N
29.40	1.157	76756	65.00	2.559	20.40	0.803	36.00	205.570	22.25	0.876	801.00	180.072	42.75	1.683	4.50	0.177	9.5	MW	CG	N
29.40	1.157	76757	75.00	2.953	20.40	0.803	31.00	177.010	26.40	1.039	818.40	183.984	48.60	1.913	4.50	0.177	10.8	MW	CG	N
29.40	1.157	76758	85.00	3.346	20.40	0.803	27.00	154.170	30.55	1.203	824.85	185.434	54.45	2.144	4.50	0.177	12.1	MW	CG	N
29.40	1.157	76759	100.00	3.937	20.40	0.803	22.00	125.620	36.55	1.439	804.10	180.769	63.45	2.498	4.50	0.177	14.1	MW	CG	N
29.40	1.157	76760	120.00	4.724	20.40	0.803	19.00	108.490	44.85	1.766	852.15	191.571	75.15	2.959	4.50	0.177	16.7	MW	CG	N
29.50	1.161	76761	30.00	1.181	22.50	0.886	32.00	182.720	13.40	0.528	428.83	96.405	16.45	0.648	3.50	0.138	4.7	MW	CG	N
29.50	1.161	76762	40.00	1.575	22.50	0.886	22.00	125.620	19.35	0.762	425.70	95.701	20.65	0.813	3.50	0.138	5.9	MW	CG	N
29.50	1.161	76763	50.00	1.969	22.50	0.886	17.00	97.070	25.15	0.990	427.55	96.117	24.85	0.978	3.50	0.138	7.1	MW	CG	N
29.50	1.161	76764	60.00	2.362	22.50	0.886	14.00	79.940	30.63	1.206	428.82	96.403	29.05	1.144	3.50	0.138	8.3	MW	CG	N
29.50	1.161	76765	70.00	2.756	22.50	0.886	12.00	68.520	35.74	1.407	428.82	96.403	33.25	1.309	3.50	0.138	9.5	MW	CG	N
29.50	1.161	76766	80.00	3.150	22.50	0.886	10.00	57.100	42.55	1.675	425.50	95.656	37.45	1.474	3.50	0.138	10.7	MW	CG	N
29.50	1.161	76767	90.00	3.543	22.50	0.886	8.80	50.250	48.35	1.904	425.48	95.652	41.65	1.640	3.50	0.138	11.9	MW	CG	N
29.50	1.161	76768	110.00	4.331	22.50	0.886	7.10	40.540	59.95	2.360	425.65	95.689	50.05	1.970	3.50	0.138	14.3	MW	CG	N
29.50	1.161	76769	130.00	5.118	22.50	0.886	6.00	34.260	71.47	2.814	428.83	96.404	58.10	2.287	3.50	0.138	16.6	MW	CG	N
29.90	1.177	76770	34.00	1.339	19.90	0.783	136.00	776.580	8.16	0.321	1109.62	249.454	25.00	0.984	5.00	0.197	5	MW	CG	N
29.90	1.177	76771	41.00	1.614	19.90	0.783	116.00	662.380	9.57	0.377	1109.66	249.461	27.50	1.083	5.00	0.197	5.5	MW	CG	N
29.90	1.177	76772	49.00	1.929	19.90	0.783	82.00	468.230	13.53	0.533	1109.62	249.454	35.00	1.378	5.00	0.197	7	MW	CG	N
29.90	1.177	76773	60.00	2.362	19.90	0.783	74.00	422.550	15.00	0.590	1109.63	249.455	37.50	1.476	5.00	0.197	7.5	MW	CG	N
29.90	1.177	76774	88.00	3.465	19.90	0.783	48.00	274.090	23.12	0.910	1109.62	249.452	52.50	2.067	5.00	0.197	10.5	MW	CG	N
29.90	1.177	76775	102.00	4.016	19.90	0.783	34.00	194.150	32.00	1.260	1088.00	244.592	70.00	2.756	5.00	0.197	14	MW	CG	N
29.90	1.177	76776	125.00	4.921	19.90	0.783	33.00	188.430	33.62	1.324	1109.59	249.446	72.50	2.854	5.00	0.197	14.5	MW	CG	N
29.90	1.177	76777	180.00	7.087	19.90	0.783	22.00	125.620	50.44	1.986	1109.59	249.446	102.50	4.035	5.00	0.197	20.5	MW	CG	N
30.37	1.196	76778	55.00	2.165	18.43	0.726	169.96	970.500	10.32	0.406	1753.82	394.274	42.39	1.669	5.97	0.235	7.1	MW	CG	N
30.37	1.196	76779	70.00	2.756	18.43	0.726	127.47	727.870	13.76	0.542	1753.73	394.255	52.54	2.069	5.97	0.235	8.8	MW	CG	N
30.37	1.196	76780	85.00	3.346	18.43	0.726	101.97													




Metric Compression Springs

O.D. mm	Century Stock Number	Free Length mm	I.D. mm	Rate N/mm	Sugg Max. Defl. mm	Sugg Max. load N	Solid Length mm	Wire Dia. mm	Total Coils	Ends	F n sh							
Inches		Inches	Inches	Lbs./In.	Inches	Lbs.	Inches	mm	Mat'l									
31.50	1.240	76803	50.00	1.969	22.50	0.886	42.00	239.830	18.05	0.711	758.10	170.428	31.95	1.258	4.50	0.177	7.1	MW CG N
31.50	1.240	76804	60.00	2.362	25.50	1.004	7.00	39.970	37.61	1.481	263.30	59.192	21.30	0.839	3.00	0.118	7.1	MW CG N
31.50	1.240	76805	60.00	2.362	25.50	0.886	34.00	194.150	22.65	0.892	770.10	173.125	37.35	1.470	4.50	0.177	8.3	MW CG N
31.50	1.240	76806	70.00	2.756	25.50	1.004	5.80	33.120	45.40	1.787	263.30	59.192	24.30	0.957	3.00	0.118	8.1	MW CG N
31.50	1.240	76807	70.00	2.756	22.50	0.886	28.00	159.880	27.25	1.073	763.00	171.529	42.75	1.683	4.50	0.177	9.5	MW CG N
31.50	1.240	76808	80.00	3.150	25.50	1.004	5.10	29.120	51.63	2.033	263.30	59.192	27.00	1.063	3.00	0.118	9	MW CG N
31.50	1.240	76809	80.00	3.150	22.50	0.886	24.00	137.040	31.40	1.236	753.60	169.416	48.60	1.913	4.50	0.177	10.8	MW CG N
31.50	1.240	76810	90.00	3.543	25.50	1.004	4.50	25.700	58.51	2.304	263.30	59.192	30.00	1.181	3.00	0.118	10	MW CG N
31.50	1.240	76811	90.00	3.543	22.50	0.886	21.00	119.910	36.00	1.417	756.00	169.956	54.00	2.126	4.50	0.177	12	MW CG N
31.50	1.240	76812	110.00	4.331	25.50	1.004	3.60	20.560	73.14	2.879	263.30	59.192	36.00	1.417	3.00	0.118	12	MW CG N
31.50	1.240	76813	110.00	4.331	22.50	0.886	17.00	97.070	45.20	1.780	768.40	172.743	64.80	2.551	4.50	0.177	14.4	MW CG N
31.50	1.240	76814	130.00	5.118	25.50	1.004	3.00	17.130	87.77	3.455	263.30	59.192	41.70	1.642	3.00	0.118	13.9	MW CG N
31.50	1.240	76815	130.00	5.118	22.50	0.886	14.00	79.940	54.40	2.142	761.60	171.215	75.60	2.976	4.50	0.177	16.8	MW CG N
32.47	1.278	76816	60.00	2.362	20.53	0.808	125.30	715.480	13.24	0.521	1658.60	372.867	44.18	1.739	5.97	0.235	7.4	MW CG N
32.47	1.278	76817	75.00	2.953	20.53	0.808	96.66	551.940	17.16	0.676	1658.59	372.866	53.73	2.115	5.97	0.235	9	MW CG N
32.47	1.278	76818	90.00	3.543	20.53	0.808	78.68	449.270	21.08	0.830	1658.57	372.862	63.28	2.491	5.97	0.235	10.6	MW CG N
32.47	1.278	76819	110.00	4.331	20.53	0.808	62.65	357.740	26.47	1.042	1658.53	372.853	76.42	3.009	5.97	0.235	12.8	MW CG N
32.50	1.280	76820	25.00	0.984	25.50	1.004	37.00	211.280	10.59	0.417	391.76	88.070	12.95	0.510	3.50	0.138	3.7	MW CG N
32.50	1.280	76821	35.00	1.378	25.50	1.004	23.00	131.330	17.03	0.671	391.74	88.066	16.45	0.648	3.50	0.138	4.7	MW CG N
32.50	1.280	76822	40.00	1.575	22.50	0.886	83.00	473.940	11.50	0.453	954.50	214.580	28.50	1.122	5.00	0.197	5.7	MW CG N
32.50	1.280	76823	45.00	1.772	25.50	1.004	16.00	91.360	24.48	0.964	391.74	88.068	20.30	0.799	3.50	0.138	5.8	MW CG N
32.50	1.280	76824	55.00	2.165	25.50	1.004	13.00	74.230	30.13	1.186	391.74	88.067	23.80	0.937	3.50	0.138	6.8	MW CG N
32.50	1.280	76825	60.00	2.362	22.50	0.886	50.00	285.510	19.50	0.768	975.00	219.189	40.50	1.594	5.00	0.197	8.1	MW CG N
32.50	1.280	76826	65.00	2.559	25.50	1.004	11.00	62.810	35.61	1.402	391.74	88.067	27.65	1.089	3.50	0.138	7.9	MW CG N
32.50	1.280	76827	75.00	2.953	25.50	1.004	9.10	51.960	43.05	1.695	391.75	88.068	31.15	1.226	3.50	0.138	8.9	MW CG N
32.50	1.280	76828	80.00	3.150	22.50	0.886	36.00	205.570	27.50	1.083	990.00	222.561	52.50	2.067	5.00	0.197	10.5	MW CG N
32.50	1.280	76829	85.00	3.346	25.50	1.004	7.80	44.540	50.00	1.969	390.00	87.676	35.00	1.378	3.50	0.138	10	MW CG N
32.50	1.280	76830	100.00	3.937	25.50	1.004	6.60	37.690	59.36	2.337	391.74	88.067	40.25	1.585	3.50	0.138	11.5	MW CG N
32.50	1.280	76831	100.00	3.937	22.50	0.886	28.00	159.880	35.00	1.378	980.00	220.313	65.00	2.559	5.00	0.197	13	MW CG N
32.50	1.280	76832	120.00	4.724	25.50	1.004	5.50	31.410	71.23	2.804	391.74	88.067	47.25	1.860	3.50	0.138	13.5	MW CG N
32.50	1.280	76833	120.00	4.724	22.50	0.886	23.00	131.330	43.00	1.693	989.00	223.336	77.00	3.031	5.00	0.197	15.4	MW CG N
32.50	1.280	76834	140.00	5.512	25.50	1.004	4.60	26.270	85.16	3.353	391.74	88.067	54.60	2.150	3.50	0.138	15.6	MW CG N
32.50	1.280	76835	140.00	5.512	22.50	0.886	19.00	108.490	51.00	2.008	969.00	217.840	89.00	3.504	5.00	0.197	17.8	MW CG N
32.50	1.280	76836	160.00	6.299	22.50	0.886	17.00	97.070	59.50	2.343	1011.50	227.394	100.50	3.957	5.00	0.197	20.1	MW CG N
33.50	1.319	76837	30.00	1.181	25.50	1.004	44.00	251.250	12.46	0.490	548.02	123.200	17.20	0.677	4.00	0.157	4.3	MW CG N
33.50	1.319	76838	40.00	1.575	25.50	1.004	31.00	177.010	17.68	0.696	548.02	123.199	21.20	0.835	4.00	0.157	5.3	MW CG N
33.50	1.319	76839	50.00	1.969	25.50	1.004	23.00	131.330	23.83	0.938	548.02	123.200	25.60	1.008	4.00	0.157	6.4	MW CG N
33.50	1.319	76840	60.00	2.362	25.50	1.004	18.00	102.780	30.00	1.181	540.00	121.397	30.00	1.181	4.00	0.157	7.5	MW CG N
33.50	1.319	76841	70.00	2.756	25.50	1.004	15.00	85.650	35.60	1.402	534.00	120.048	34.40	1.354	4.00	0.157	8.6	MW CG N
33.50	1.319	76842	80.00	3.150	25.50	1.004	13.00	74.230	41.20	1.622	535.60	120.408	38.80	1.528	4.00	0.157	9.7	MW CG N
33.50	1.319	76843	90.00	3.543	25.50	1.004	12.00	68.520	45.67	1.798	548.02	123.199	42.80	1.685	4.00	0.157	10.7	MW CG N
33.50	1.319	76844	110.00	4.331	25.50	1.004	9.30	53.100	58.40	2.299	543.12	122.098	51.60	2.031	4.00	0.157	12.9	MW CG N
33.50	1.319	76845	130.00	5.118	25.50	1.004	7.80	44.540	69.60	2.740	542.88	122.044	60.40	2.378	4.00	0.157	15.1	MW CG N
33.50	1.319	76846	150.00	5.906	25.50	1.004	6.70	38.260	81.20	3.197	544.04	122.305	68.80	2.709	4.00	0.157	17.2	MW CG N
34.47	1.357	76847	40.00	1.575	22.53	0.887	168.00	959.300	8.72	0.343	1646.96	329.336	31.28	1.231	5.97	0.235	5.2	MW CG N
34.47	1.357	76848	60.00	2.362	22.53	0.887	100.00	571.010	15.58	0.613	1558.00	350.253	44.42	1.749	5.97	0.235	7.4	MW CG N
34.47	1.357	76849	65.00	2.559	22.53	0.887	97.13	554.630	16.23	0.639	1575.93	354.284	45.37	1.786	5.97	0.235	7.6	MW CG N
34.47	1.357	76850	80.00	3.150	22.53	0.887	71.00	405.420	22.20	0.874	1575.99	354.296	57.67	2.270	5.97	0.235	9.7	MW CG N
34.47	1.357	76851	100.00	3.937	22.53	0.887	55.00	314.060	28.65	1.128	1575.97	354.292	70.98	2.794	5.97	0.235	11.9	MW CG N
34.47	1.357	76852	120.00	4.724	22.53	0.887	46.00	262.670	34.26	1.349	1575.96	354.290	82.51	3.248	5.97	0.235	13.8	MW CG N
34.47	1.357	76853	140.00	5.512	22.53	0.887	38.00	216.990	41.47	1.633	1575.94	354.285	97.37	3.833	5.97	0.235	16.3	MW CG N
34.47	1.357	76854	160.00	6.299	22.53	0.887	34.00	194.150	46.35	1.825	1575.97	354.292	107.46	4.231	5.97	0.235	18	MW CG N
34.50	1.358	76855	35.00	1.378	25.50	1.004	55.00	314.060	13.40	0.528	737.00	165.684	21.60	0.850	4.50	0.177	4.8	MW CG N
34.50	1.358	76856	45.00	1.772	25.50	1.004	40.00	228.410	18.45	0.726	738.00	165.909	26.55	1.045	4.50	0.177	5.9	MW CG N
34.50	1.358	76857	51.00	2.008	29.50	1.161												




Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg. Max. Defl. mm Inches	Sugg. Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends Mat'l	Finish Fns'h									
35.18	1.385	76878	101.00	3.976	28.82	1.135	4.10	23.410	68.14	2.683	279.37	62.806	30.34	1.194	3.18	0.125	9.5	MW	CG	N
35.18	1.385	76879	135.00	5.315	28.82	1.135	3.80	21.700	73.52	2.894	279.37	62.805	32.25	1.270	3.18	0.125	10.1	MW	CG	N
35.18	1.385	76880	147.00	5.787	28.82	1.135	2.70	15.420	103.47	4.074	279.37	62.806	42.80	1.685	3.18	0.125	13.5	MW	CG	N
35.18	1.385	76881	190.00	7.480	28.82	1.135	2.60	14.850	107.45	4.230	279.38	62.806	44.20	1.740	3.18	0.125	13.9	MW	CG	N
35.18	1.385	76882	215.00	8.465	28.82	1.135	1.80	10.280	153.98	6.062	277.16	62.309	61.02	2.402	3.18	0.125	19.2	MW	CG	N
35.18	1.385	76883	280.00	11.024	28.82	1.135	1.80	10.280	155.21	6.111	279.37	62.806	61.02	2.402	3.18	0.125	19.2	MW	CG	N
35.50	1.398	76884	30.00	1.181	28.50	1.122	25.00	142.750	14.42	0.568	360.48	81.038	13.65	0.537	3.50	0.138	3.9	MW	CG	N
35.50	1.398	76885	30.00	1.181	25.50	1.004	102.00	582.440	9.00	0.354	918.00	206.375	21.00	0.827	5.00	0.197	4.2	MW	CG	N
35.50	1.398	76886	40.00	1.575	28.50	1.122	17.00	97.070	21.20	0.835	360.47	81.036	16.80	0.661	3.50	0.138	4.8	MW	CG	N
35.50	1.398	76887	50.00	1.969	28.50	1.122	13.00	74.230	27.73	1.092	360.46	81.036	19.95	0.785	3.50	0.138	5.7	MW	CG	N
35.50	1.398	76888	50.00	1.969	25.50	1.004	51.00	291.220	18.00	0.709	918.00	206.375	32.00	1.260	5.00	0.197	6.4	MW	CG	N
35.50	1.398	76889	60.00	2.362	28.50	1.122	10.00	57.100	36.05	1.419	360.47	81.037	23.10	0.909	3.50	0.138	6.6	MW	CG	N
35.50	1.398	76890	70.00	2.756	28.50	1.122	8.50	48.540	42.41	1.670	360.47	81.036	26.25	1.033	3.50	0.138	7.5	MW	CG	N
35.50	1.398	76891	70.00	2.756	25.50	1.004	34.00	194.150	27.00	1.063	918.00	206.375	43.00	1.693	5.00	0.197	8.6	MW	CG	N
35.50	1.398	76892	80.00	3.150	28.50	1.122	7.30	41.680	49.38	1.944	360.47	81.036	29.40	1.157	3.50	0.138	8.4	MW	CG	N
35.50	1.398	76893	90.00	3.543	28.50	1.122	6.40	36.540	56.32	2.217	360.47	81.036	32.55	1.281	3.50	0.138	9.3	MW	CG	N
35.50	1.398	76894	90.00	3.543	25.50	1.004	26.00	148.460	36.00	1.417	936.00	210.421	54.00	2.126	5.00	0.197	10.8	MW	CG	N
35.50	1.398	76895	110.00	4.331	28.50	1.122	5.10	29.120	70.68	2.783	360.46	81.035	38.85	1.530	3.50	0.138	11.1	MW	CG	N
35.50	1.398	76896	110.00	4.331	25.50	1.004	20.00	114.200	45.00	1.772	900.00	202.328	65.00	2.559	5.00	0.197	13	MW	CG	N
35.50	1.398	76897	130.00	5.118	28.50	1.122	4.30	24.550	83.83	3.300	360.47	81.036	44.80	1.764	3.50	0.138	12.8	MW	CG	N
35.50	1.398	76898	130.00	5.118	25.50	1.004	17.00	97.070	54.00	2.126	918.00	206.375	76.00	2.992	5.00	0.197	15.2	MW	CG	N
35.50	1.398	76899	150.00	5.906	28.50	1.122	3.70	21.130	97.42	3.836	360.47	81.036	51.10	2.012	3.50	0.138	14.6	MW	CG	N
35.50	1.398	76900	150.00	5.906	25.50	1.004	15.00	85.650	63.49	2.500	952.37	214.100	86.50	3.406	5.00	0.197	17.3	MW	CG	N
36.00	1.417	76901	41.00	1.614	28.00	1.102	27.00	154.170	18.98	0.747	512.46	115.206	20.00	0.787	4.00	0.157	5	MW	CG	N
36.00	1.417	76902	54.00	2.126	28.00	1.102	23.00	131.330	22.28	0.877	512.46	115.206	22.00	0.866	4.00	0.157	5.5	MW	CG	N
36.00	1.417	76903	61.00	2.402	28.00	1.102	16.00	91.360	32.03	1.261	512.46	115.207	28.00	1.102	4.00	0.157	7	MW	CG	N
36.00	1.417	76904	80.00	3.150	28.00	1.102	14.00	79.940	36.61	1.441	512.47	115.208	30.00	1.181	4.00	0.157	7.5	MW	CG	N
36.00	1.417	76905	91.00	3.583	28.00	1.102	9.90	56.530	51.00	2.008	504.90	113.506	40.00	1.575	4.00	0.157	10	MW	CG	N
36.00	1.417	76906	120.00	4.724	28.00	1.102	9.40	53.680	54.52	2.146	512.46	115.206	42.00	1.654	4.00	0.157	10.5	MW	CG	N
36.00	1.417	76907	131.00	5.157	28.00	1.102	6.60	37.690	75.00	2.953	495.00	111.280	56.00	2.205	4.00	0.157	14	MW	CG	N
36.00	1.417	76908	170.00	6.693	28.00	1.102	6.40	36.540	80.07	3.152	512.46	115.206	58.00	2.283	4.00	0.157	14.5	MW	CG	N
36.00	1.417	76909	191.00	7.520	28.00	1.102	4.40	25.120	111.00	4.370	488.40	109.797	80.00	3.150	4.00	0.157	20	MW	CG	N
36.00	1.417	76910	250.00	9.843	28.00	1.102	4.30	24.550	119.18	4.692	512.46	115.206	82.00	3.228	4.00	0.157	20.5	MW	CG	N
36.50	1.437	76911	35.00	1.378	28.50	1.122	32.00	182.720	15.81	0.622	505.89	113.728	17.60	0.693	4.00	0.157	4.4	MW	CG	N
36.50	1.437	76912	45.00	1.772	28.50	1.122	22.00	125.620	23.00	0.905	505.89	113.729	21.60	0.850	4.00	0.157	5.4	MW	CG	N
36.50	1.437	76913	55.00	2.165	28.50	1.122	18.00	102.780	28.11	1.106	505.89	113.729	25.20	0.992	4.00	0.157	6.3	MW	CG	N
36.50	1.437	76914	65.00	2.559	28.50	1.122	14.00	79.940	35.80	1.409	501.20	112.674	29.20	1.150	4.00	0.157	7.3	MW	CG	N
36.50	1.437	76915	75.00	2.953	28.50	1.122	12.00	68.520	42.16	1.660	505.88	113.727	32.80	1.291	4.00	0.157	8.2	MW	CG	N
36.50	1.437	76916	85.00	3.346	28.50	1.122	11.00	62.810	45.99	1.811	505.89	113.729	36.40	1.433	4.00	0.157	9.1	MW	CG	N
36.50	1.437	76917	100.00	3.937	28.50	1.122	8.90	50.820	56.84	2.238	505.89	113.728	42.00	1.654	4.00	0.157	10.5	MW	CG	N
36.50	1.437	76918	120.00	4.724	28.50	1.122	7.30	41.680	69.30	2.728	505.89	113.729	49.60	1.953	4.00	0.157	12.4	MW	CG	N
36.50	1.437	76919	140.00	5.512	28.50	1.122	6.20	35.400	81.60	3.212	505.89	113.728	57.20	2.252	4.00	0.157	14.3	MW	CG	N
36.50	1.437	76920	160.00	6.299	28.50	1.122	5.40	30.830	93.68	3.688	505.89	113.728	64.80	2.551	4.00	0.157	16.2	MW	CG	N
37.00	1.457	76921	41.00	1.614	27.00	1.063	65.00	371.160	14.11	0.556	917.22	206.198	25.00	0.984	5.00	0.197	5	MW	CG	N
37.00	1.457	76922	51.00	2.008	27.00	1.063	56.00	319.770	16.38	0.645	917.22	206.200	27.50	1.083	5.00	0.197	5.5	MW	CG	N
37.00	1.457	76923	59.00	2.323	27.00	1.063	39.00	222.700	23.52	0.926	917.20	206.195	35.00	1.378	5.00	0.197	7	MW	CG	N
37.00	1.457	76924	75.00	2.953	27.00	1.063	35.00	199.860	26.21	1.032	917.21	206.197	37.50	1.476	5.00	0.197	7.5	MW	CG	N
37.00	1.457	76925	88.00	3.465	27.00	1.063	24.00	137.040	38.00	1.496	917.20	206.026	50.00	1.969	5.00	0.197	10	MW	CG	N
37.00	1.457	76926	110.00	4.331	27.00	1.063	23.00	131.330	39.88	1.570	917.22	206.199	52.50	2.067	5.00	0.197	10.5	MW	CG	N
37.00	1.457	76927	125.00	4.921	27.00	1.063	16.00	91.360	55.00	2.165	880.00	197.832	70.00	2.756	5.00	0.197	14	MW	CG	N
37.00	1.457	76928	160.00	6.299	27.00	1.063	16.00	91.360	57.33	2.257	917.22	206.198	72.50	2.854	5.00	0.197	14.5	MW	CG	N
37.00	1.457	76929	182.00	7.165	27.00	1.063	11.00	62.810	82.00	3.228	902.00	202.778	100.00	3.937	5.00	0.197	20	MW	CG	N
37.00	1.457	76930	230.00	9.055	27.00	1.063	11.00	62.810	8											




Metric Compression Springs

O.D. mm	Century Stock Number	Free Length mm	Free Length Inches	I.D. mm	I.D. Inches	Rate N/mm	Rate Lbs./In.	Sugg Max. Defl. mm	Sugg Max. Defl. Inches	Sugg Max. load N	Sugg Max. load Lbs.	Solid Length mm	Solid Length Inches	Wire Dia. mm	Wire Dia. Inches	Total Coils	Mat'l	Ends	F n sh
38.35	1.510	76953	128.00	5.039	25.65	1.010	41.00	234.120	39.10	1.539	1603.10	360.391	88.90	3.500	6.35	0.250	14	MW CG N	
38.35	1.510	76954	155.00	6.102	25.65	1.010	39.00	222.700	43.97	1.731	1714.67	385.474	92.77	3.652	6.35	0.250	14.6	MW CG N	
38.35	1.510	76955	184.00	7.244	25.65	1.010	27.00	154.170	55.60	2.189	1501.20	337.483	128.40	5.055	6.35	0.250	20.2	MW CG N	
38.35	1.510	76956	225.00	8.858	25.65	1.010	26.00	148.460	65.95	2.596	1714.67	385.474	132.84	5.230	6.35	0.250	20.9	MW CG N	
38.50	1.516	76957	40.00	1.575	30.50	1.201	24.00	137.040	20.05	0.789	481.15	108.167	18.40	0.724	4.00	0.157	4.6	MW CG N	
38.50	1.516	76958	50.00	1.969	30.50	1.201	18.00	102.780	26.73	1.052	481.16	108.169	22.00	0.866	4.00	0.157	5.5	MW CG N	
38.50	1.516	76959	60.00	2.362	30.50	1.201	15.00	85.650	32.08	1.263	481.16	108.168	25.20	0.992	4.00	0.157	6.3	MW CG N	
38.50	1.516	76960	70.00	2.756	30.50	1.201	12.00	68.520	40.10	1.579	481.16	108.170	28.80	1.134	4.00	0.157	7.2	MW CG N	
38.50	1.516	76961	80.00	3.150	30.50	1.201	10.00	57.100	47.60	1.874	476.00	107.009	32.40	1.276	4.00	0.157	8.1	MW CG N	
38.50	1.516	76962	90.00	3.543	30.50	1.201	9.10	51.960	52.88	2.082	481.16	108.170	36.00	1.417	4.00	0.157	9	MW CG N	
38.50	1.516	76963	110.00	4.331	30.50	1.201	7.30	41.680	65.91	2.595	481.16	108.169	42.80	1.685	4.00	0.157	10.7	MW CG N	
38.50	1.516	76964	130.00	5.118	30.50	1.201	6.10	34.830	78.88	3.105	481.16	108.170	49.60	1.953	4.00	0.157	12.4	MW CG N	
38.50	1.516	76965	150.00	5.906	30.50	1.201	5.20	29.690	92.53	3.643	481.16	108.169	56.80	2.236	4.00	0.157	14.2	MW CG N	
39.50	1.555	76966	40.00	1.575	30.50	1.201	36.00	205.570	18.15	0.714	653.26	146.858	21.15	0.833	4.50	0.177	4.7	MW CG N	
39.50	1.555	76967	50.00	1.969	30.50	1.201	27.00	154.170	24.19	0.953	653.24	146.854	25.20	0.992	4.50	0.177	5.6	MW CG N	
39.50	1.555	76968	60.00	2.362	30.50	1.201	22.00	125.620	29.69	1.169	653.25	146.856	29.25	1.152	4.50	0.177	6.5	MW CG N	
39.50	1.555	76969	70.00	2.756	30.50	1.201	18.00	102.780	36.25	1.427	652.50	146.688	33.75	1.329	4.50	0.177	7.5	MW CG N	
39.50	1.555	76970	80.00	3.150	30.50	1.201	15.00	85.650	42.20	1.661	633.00	142.304	37.80	1.488	4.50	0.177	8.4	MW CG N	
39.50	1.555	76971	90.00	3.543	30.50	1.201	13.00	74.230	48.15	1.896	625.95	140.719	41.85	1.648	4.50	0.177	9.3	MW CG N	
39.50	1.555	76972	110.00	4.331	30.50	1.201	11.00	62.810	59.39	2.338	653.25	146.856	49.95	1.967	4.50	0.177	11.1	MW CG N	
39.50	1.555	76973	130.00	5.118	30.50	1.201	9.00	51.390	72.40	2.850	651.60	146.486	57.60	2.268	4.50	0.177	12.8	MW CG N	
39.50	1.555	76974	150.00	5.906	30.50	1.201	7.70	43.970	83.85	3.301	645.65	145.147	66.15	2.604	4.50	0.177	14.7	MW CG N	
39.69	1.563	76975	40.00	1.575	25.31	0.996	254.00	1450.380	3.76	0.148	955.04	214.702	36.24	1.427	7.19	0.283	5	MW CG N	
39.69	1.563	76976	60.00	2.362	25.31	0.996	148.00	845.100	8.16	0.321	1207.68	271.497	51.84	2.041	7.19	0.283	7.2	MW CG N	
39.69	1.563	76977	80.00	3.150	25.31	0.996	103.00	588.150	11.77	0.463	1212.31	272.538	68.23	2.686	7.19	0.283	9.5	MW CG N	
39.69	1.563	76978	100.00	3.937	25.31	0.996	80.00	456.810	16.24	0.639	1299.20	292.072	83.76	3.298	7.19	0.283	11.7	MW CG N	
39.69	1.563	76979	120.00	4.724	25.31	0.996	65.00	371.160	20.27	0.798	1317.55	296.197	99.73	3.926	7.19	0.283	13.9	MW CG N	
39.69	1.563	76980	140.00	5.512	25.31	0.996	55.00	314.060	24.74	0.974	1360.70	305.898	115.26	4.538	7.19	0.283	16	MW CG N	
39.69	1.563	76981	160.00	6.299	25.31	0.996	48.00	274.090	30.00	1.181	1440.00	323.725	130.00	5.118	7.19	0.283	18.1	MW CG N	
39.69	1.563	76982	200.00	7.874	25.31	0.996	38.00	216.990	39.59	1.559	1504.42	338.207	160.41	6.315	7.19	0.283	22.3	MW CG N	
40.50	1.594	76983	40.00	1.575	30.50	1.201	53.00	302.640	15.93	0.627	844.13	189.768	23.50	0.925	5.00	0.197	4.7	MW CG N	
40.50	1.594	76984	60.00	2.362	30.50	1.201	32.00	182.720	26.38	1.039	844.16	189.775	32.50	1.280	5.00	0.197	6.5	MW CG N	
40.50	1.594	76985	80.00	3.150	30.50	1.201	22.00	125.620	38.00	1.496	836.00	187.940	42.00	1.654	5.00	0.197	8.4	MW CG N	
40.50	1.594	76986	100.00	3.937	30.50	1.201	17.00	97.070	48.50	1.909	824.50	185.355	51.50	2.028	5.00	0.197	10.3	MW CG N	
40.50	1.594	76987	120.00	4.724	30.50	1.201	14.00	79.940	59.50	2.343	833.00	187.266	60.50	2.382	5.00	0.197	12.1	MW CG N	
40.50	1.594	76988	140.00	5.512	30.50	1.201	12.00	68.520	70.00	2.756	840.00	188.840	70.00	2.756	5.00	0.197	14	MW CG N	
40.50	1.594	76989	160.00	6.299	30.50	1.201	10.00	57.100	81.00	3.189	810.00	182.095	79.00	3.110	5.00	0.197	15.8	MW CG N	
40.50	1.594	76990	200.00	7.874	30.50	1.201	8.10	46.250	102.50	4.035	830.25	186.648	97.50	3.839	5.00	0.197	19.5	MW CG N	
42.47	1.672	76991	40.00	1.575	30.53	1.202	101.00	576.720	12.78	0.503	1290.78	290.179	27.22	1.072	5.97	0.235	4.6	MW CG N	
42.47	1.672	76992	60.00	2.362	30.53	1.202	60.00	342.610	21.83	0.859	1309.80	294.455	37.73	1.485	5.97	0.235	6.3	MW CG N	
42.47	1.672	76993	80.00	3.150	30.53	1.202	42.00	239.830	31.19	1.228	1309.77	294.448	48.77	1.920	5.97	0.235	8.2	MW CG N	
42.47	1.672	76994	100.00	3.937	30.53	1.202	33.00	188.430	39.69	1.563	1309.77	294.448	58.80	2.315	5.97	0.235	9.9	MW CG N	
42.47	1.672	76995	120.00	4.724	30.53	1.202	27.00	154.170	48.51	1.910	1309.77	294.448	69.19	2.724	5.97	0.235	11.6	MW CG N	
42.47	1.672	76996	140.00	5.512	30.53	1.202	23.00	131.330	56.95	2.242	1309.78	294.451	79.16	3.117	5.97	0.235	13.3	MW CG N	
42.47	1.672	76997	160.00	6.299	30.53	1.202	20.00	114.200	65.49	2.578	1309.78	294.450	89.25	3.514	5.97	0.235	15	MW CG N	
42.47	1.672	76998	200.00	7.874	30.53	1.202	16.00	91.360	81.86	3.223	1309.78	294.450	108.53	4.273	5.97	0.235	18.2	MW CG N	
43.18	1.700	76999	61.00	2.402	36.82	1.450	5.60	31.980	40.99	1.614	229.56	51.607	15.36	0.605	3.18	0.125	4.8	MW CG N	
43.18	1.700	77000	82.00	3.228	36.82	1.450	4.80	27.410	47.83	1.883	229.56	51.607	16.85	0.663	3.18	0.125	5.3	MW CG N	
43.18	1.700	77001	93.00	3.661	36.82	1.450	3.30	18.840	69.56	2.739	229.56	51.607	21.62	0.851	3.18	0.125	6.8	MW CG N	
43.18	1.700	77002	125.00	4.921	36.82	1.450	3.00	17.130	76.52	3.013	229.56	51.607	23.15	0.911	3.18	0.125	7.3	MW CG N	
43.18	1.700	77003	141.00	5.551	36.82	1.450	2.10	11.990	109.32	4.304	229.56	51.608	30.34	1.194	3.18	0.125	9.5	MW CG N	
43.18	1.700	77004	190.00	7.480	36.82	1.450	2.00	11.420	114.78	4.519	229.56	51.608	31.55	1.242	3.18	0.125	9.9	MW CG N	
43.18	1.700	77005	205.00	8.071	36.82	1.450	1.40	7.990	162.67	6.404	227.74	51.198	42.33	1.667	3.18	0.125	13.3	MW CG N	
43.18	1.700	77006	275.00	10.827	36.82	1.450	1.30	7.420	176.59	6.952	229.56	51.607	45.09	1.775	3.18	0.125	14.2	MW CG N	
43.18																			




Metric Compression Springs

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils Mat'l	Ends E	Finish F nsh									
44.50	1.752	77028	65.00	2.559	35.50	1.398	16.00	91.360	36.51	1.437	584.10	131.310	27.00	1.063	4.50	0.177	6	MW	CG	N
44.50	1.752	77029	75.00	2.953	35.50	1.398	14.00	79.940	41.72	1.643	584.09	131.310	30.60	1.205	4.50	0.177	6.8	MW	CG	N
44.50	1.752	77030	85.00	3.346	35.50	1.398	12.00	68.520	48.68	1.916	584.10	131.311	33.75	1.329	4.50	0.177	7.5	MW	CG	N
44.50	1.752	77031	100.00	3.937	35.50	1.398	9.70	55.390	60.22	2.371	584.10	131.310	39.15	1.541	4.50	0.177	8.7	MW	CG	N
44.50	1.752	77032	120.00	4.724	35.50	1.398	8.00	45.680	73.01	2.874	584.10	131.310	45.90	1.807	4.50	0.177	10.2	MW	CG	N
44.50	1.752	77033	140.00	5.512	35.50	1.398	6.80	38.830	85.90	3.382	584.10	131.311	52.20	2.055	4.50	0.177	11.6	MW	CG	N
44.50	1.752	77034	160.00	6.299	35.50	1.398	5.90	33.690	99.00	3.898	584.10	131.311	58.95	2.321	4.50	0.177	13.1	MW	CG	N
44.69	1.759	77035	50.00	1.969	30.31	1.193	136.00	776.580	9.09	0.358	1236.24	277.918	40.91	1.611	7.19	0.283	5.7	MW	CG	N
44.69	1.759	77036	70.00	2.756	30.31	1.193	89.00	508.200	15.07	0.593	1341.23	301.521	54.93	2.163	7.19	0.283	7.6	MW	CG	N
44.69	1.759	77037	90.00	3.543	30.31	1.193	66.00	376.870	20.90	0.823	1379.40	310.102	69.10	2.720	7.19	0.283	9.6	MW	CG	N
44.69	1.759	77038	110.00	4.331	30.31	1.193	52.00	296.930	26.16	1.030	1360.32	305.812	83.84	3.301	7.19	0.283	11.7	MW	CG	N
44.69	1.759	77039	130.00	5.118	30.31	1.193	43.00	245.540	31.64	1.246	1360.52	305.857	98.36	3.872	7.19	0.283	13.7	MW	CG	N
44.69	1.759	77040	150.00	5.906	30.31	1.193	37.00	211.280	37.98	1.495	1405.26	315.915	112.02	4.410	7.19	0.283	15.6	MW	CG	N
44.69	1.759	77041	200.00	7.874	30.31	1.193	27.00	154.170	51.81	2.040	1398.87	314.479	148.19	5.834	7.19	0.283	20.6	MW	CG	N
45.00	1.772	77042	64.00	2.520	35.00	1.378	28.00	159.880	27.33	1.076	765.35	172.058	27.50	1.083	5.00	0.197	5.5	MW	CG	N
45.00	1.772	77043	74.00	2.913	35.00	1.378	20.00	114.200	38.27	1.507	765.36	172.060	35.00	1.378	5.00	0.197	7	MW	CG	N
45.00	1.772	77044	96.00	3.780	35.00	1.378	18.00	102.780	42.52	1.674	765.34	172.056	37.50	1.476	5.00	0.197	7.5	MW	CG	N
45.00	1.772	77045	111.00	4.370	35.00	1.378	12.00	68.520	61.00	2.402	732.00	164.560	50.00	1.969	5.00	0.197	10	MW	CG	N
45.00	1.772	77046	140.00	5.512	35.00	1.378	12.00	68.520	63.78	2.511	765.35	172.057	52.50	2.067	5.00	0.197	10.5	MW	CG	N
45.00	1.772	77047	159.00	6.260	35.00	1.378	8.30	47.390	89.00	3.504	738.70	166.066	70.00	2.756	5.00	0.197	14	MW	CG	N
45.00	1.772	77048	205.00	8.071	35.00	1.378	8.00	45.680	95.67	3.766	765.35	172.058	72.50	2.854	5.00	0.197	14.5	MW	CG	N
45.00	1.772	77049	232.00	9.134	35.00	1.378	5.50	31.410	132.00	5.197	726.00	163.211	100.00	3.937	5.00	0.197	20	MW	CG	N
45.00	1.772	77050	300.00	11.811	35.00	1.378	5.40	30.830	141.73	5.580	765.35	172.057	102.50	4.035	5.00	0.197	20.5	MW	CG	N
45.60	1.795	77051	50.00	1.969	35.60	1.402	32.00	182.720	23.62	0.930	755.90	169.934	25.00	0.984	5.00	0.197	5	MW	CG	N
45.60	1.795	77052	70.00	2.756	35.60	1.402	21.00	119.910	36.00	1.417	755.92	169.937	32.50	1.280	5.00	0.197	6.5	MW	CG	N
45.60	1.795	77053	90.00	3.543	35.60	1.402	16.00	91.360	47.25	1.860	755.92	169.938	40.50	1.594	5.00	0.197	8.1	MW	CG	N
45.60	1.795	77054	130.00	5.118	35.60	1.402	10.00	57.100	73.50	2.894	735.00	165.235	56.50	2.224	5.00	0.197	11.3	MW	CG	N
45.60	1.795	77055	150.00	5.906	35.60	1.402	8.80	50.250	85.90	3.382	755.92	169.938	64.00	2.520	5.00	0.197	12.8	MW	CG	N
45.60	1.795	77056	200.00	7.874	35.60	1.402	6.50	37.120	116.30	4.579	755.92	169.937	83.50	3.287	5.00	0.197	16.7	MW	CG	N
46.35	1.825	77057	49.00	1.929	33.65	1.325	84.00	479.650	17.23	0.678	1447.57	325.427	31.75	1.250	6.35	0.250	5	MW	CG	N
46.35	1.825	77058	60.00	2.362	33.65	1.325	72.00	411.130	20.11	0.792	1447.63	325.441	34.93	1.375	6.35	0.250	5.5	MW	CG	N
46.35	1.825	77059	72.00	2.835	33.65	1.325	50.00	285.510	27.30	1.075	1365.00	306.864	44.70	1.760	6.35	0.250	7	MW	CG	N
46.35	1.825	77060	90.00	3.543	33.65	1.325	46.00	262.670	31.47	1.239	1447.62	325.438	47.43	1.867	6.35	0.250	7.5	MW	CG	N
46.35	1.825	77061	106.00	4.173	33.65	1.325	31.00	177.010	41.74	1.643	1293.94	290.889	64.26	2.530	6.35	0.250	10.1	MW	CG	N
46.35	1.825	77062	135.00	5.315	33.65	1.325	30.00	171.300	48.25	1.900	1447.62	325.438	65.98	2.598	6.35	0.250	10.4	MW	CG	N
46.35	1.825	77063	152.00	5.984	33.65	1.325	21.00	119.910	63.16	2.487	1326.36	298.178	88.84	3.498	6.35	0.250	14	MW	CG	N
46.35	1.825	77064	195.00	7.677	33.65	1.325	20.00	114.200	72.38	2.850	1447.62	325.438	92.65	3.648	6.35	0.250	14.6	MW	CG	N
46.35	1.825	77065	220.00	8.661	33.65	1.325	14.00	79.940	93.06	3.664	1302.84	292.890	126.94	4.998	6.35	0.250	20	MW	CG	N
46.35	1.825	77066	280.00	11.024	33.65	1.325	14.00	79.940	103.40	4.071	1447.61	325.437	126.94	4.998	6.35	0.250	20	MW	CG	N
47.57	1.873	77067	50.00	1.969	35.63	1.403	59.00	336.900	20.01	0.788	1180.77	265.447	29.61	1.166	5.97	0.235	5	MW	CG	N
47.57	1.873	77068	70.00	2.756	35.63	1.403	39.00	222.700	30.28	1.192	1180.76	265.446	38.69	1.523	5.97	0.235	6.5	MW	CG	N
47.57	1.873	77069	90.00	3.543	35.63	1.403	29.00	165.590	40.72	1.603	1180.74	265.440	47.94	1.887	5.97	0.235	8	MW	CG	N
47.57	1.873	77070	110.00	4.331	35.63	1.403	23.00	131.330	51.34	2.021	1180.75	265.444	57.31	2.256	5.97	0.235	9.6	MW	CG	N
47.57	1.873	77071	130.00	5.118	35.63	1.403	19.00	108.490	62.15	2.447	1180.76	265.444	66.92	2.635	5.97	0.235	11.2	MW	CG	N
47.57	1.873	77072	150.00	5.906	35.63	1.403	16.00	91.360	72.81	2.867	1164.96	261.894	77.19	3.039	5.97	0.235	12.9	MW	CG	N
47.57	1.873	77073	200.00	7.874	35.63	1.403	12.00	68.520	98.40	3.874	1180.75	265.444	98.98	3.897	5.97	0.235	16.6	MW	CG	N
49.60	1.953	77074	50.00	1.969	40.60	1.598	19.00	108.490	27.74	1.092	527.00	118.475	19.80	0.780	4.50	0.177	4.4	MW	CG	N
49.60	1.953	77075	60.00	2.362	40.60	1.598	15.00	85.650	35.13	1.383	527.00	118.473	22.50	0.886	4.50	0.177	5	MW	CG	N
49.60	1.953	77076	70.00	2.756	40.60	1.598	13.00	74.230	40.54	1.596	526.99	118.473	25.20	0.992	4.50	0.177	5.6	MW	CG	N
49.60	1.953	77077	80.00	3.150	40.60	1.598	11.00	62.810	47.91	1.886	527.00	118.474	28.35	1.116	4.50	0.177	6.3	MW	CG	N
49.60	1.953	77078	90.00	3.543	40.60	1.598	9.30	53.100	56.67	2.231	526.99	118.473	31.05	1.222	4.50	0.177	6.9	MW	CG	N
49.60	1.953	77079	110.00	4.331	40.60	1.598	7.30	41.680	72.19	2.842	526.99	118.473	36.90	1.453	4.50	0.177	8.2	MW	CG	N
49.60	1.953	77080	130																	




Metric Compression Springs

O.D. mm	Century Stock Number	Free Length mm	Free Length Inches	I.D. mm	I.D. Inches	Rate N/mm	Rate Lbs./In.	Sugg Max. Defl. mm	Sugg Max. Defl. Inches	Sugg Max. load N	Sugg Max. load Lbs.	Solid Length mm	Solid Length Inches	Wire Dia. mm	Wire Dia. Inches	Total Coils	Mat'l	Ends	F n sh
52.57	2.070	77103	160.00	6.299	40.63	1.600	13.00	74.230	82.78	3.259	1076.17	241.932	69.07	2.719	5.97	0.235	11.6	MW CG N	
52.57	2.070	77104	200.00	7.874	40.63	1.600	9.80	55.960	109.81	4.323	1076.17	241.932	87.76	3.455	5.97	0.235	14.7	MW CG N	
52.57	2.070	77105	250.00	9.843	40.63	1.600	7.80	44.540	137.97	5.432	1076.17	241.932	107.16	4.219	5.97	0.235	18	MW CG N	
54.00	2.126	77106	73.00	2.874	46.00	1.811	7.00	39.970	49.78	1.960	348.46	78.337	20.00	0.787	4.00	0.157	5	MW CG N	
54.00	2.126	77107	99.00	3.898	46.00	1.811	6.00	34.260	58.08	2.286	348.46	78.337	22.00	0.866	4.00	0.157	5.5	MW CG N	
54.00	2.126	77108	112.00	4.409	46.00	1.811	4.20	23.980	82.97	3.266	348.46	78.337	28.00	1.102	4.00	0.157	7	MW CG N	
54.00	2.126	77109	150.00	5.906	46.00	1.811	3.80	21.700	91.70	3.610	348.46	78.337	30.00	1.181	4.00	0.157	7.5	MW CG N	
54.00	2.126	77110	169.00	6.654	46.00	1.811	2.60	14.850	129.00	5.079	335.40	75.401	40.00	1.575	4.00	0.157	10	MW CG N	
54.00	2.126	77111	230.00	9.055	46.00	1.811	2.50	14.280	139.38	5.488	348.46	78.337	42.00	1.654	4.00	0.157	10.5	MW CG N	
54.00	2.126	77112	246.00	9.685	46.00	1.811	1.70	9.710	190.00	7.480	323.00	72.613	56.00	2.205	4.00	0.157	14	MW CG N	
54.00	2.126	77113	335.00	13.189	46.00	1.811	1.70	9.710	204.98	8.070	348.46	78.337	58.00	2.283	4.00	0.157	14.5	MW CG N	
54.00	2.126	77114	361.00	14.213	46.00	1.811	1.20	6.850	281.00	11.063	337.20	75.806	80.00	3.150	4.00	0.157	20	MW CG N	
54.00	2.126	77115	490.00	19.291	46.00	1.811	1.10	6.280	316.78	12.472	348.46	78.337	82.00	3.228	4.00	0.157	20.5	MW CG N	
54.79	2.157	77116	50.00	1.969	40.41	1.591	87.00	496.780	15.34	0.604	1334.58	300.026	34.66	1.365	7.19	0.283	4.8	MW CG N	
54.79	2.157	77117	70.00	2.756	40.41	1.591	57.00	325.480	24.63	0.970	1403.91	315.612	45.37	1.786	7.19	0.283	6.3	MW CG N	
54.79	2.157	77118	90.00	3.543	40.41	1.591	41.00	234.120	32.55	1.281	1334.55	300.019	57.45	2.262	7.19	0.283	8	MW CG N	
54.79	2.157	77119	110.00	4.331	40.41	1.591	33.00	188.430	42.13	1.659	1390.29	312.550	67.87	2.672	7.19	0.283	9.4	MW CG N	
54.79	2.157	77120	130.00	5.118	40.41	1.591	27.00	154.170	50.19	1.976	1355.13	304.646	79.81	3.142	7.19	0.283	11.1	MW CG N	
54.79	2.157	77121	150.00	5.906	40.41	1.591	23.00	131.330	58.83	2.316	1353.09	304.187	91.17	3.589	7.19	0.283	12.7	MW CG N	
54.79	2.157	77122	200.00	7.874	40.41	1.591	17.00	97.070	81.72	3.217	1389.24	312.314	118.28	4.657	7.19	0.283	16.5	MW CG N	
54.79	2.157	77123	250.00	9.843	40.41	1.591	13.00	74.230	99.80	3.929	1297.40	291.667	150.20	5.913	7.19	0.283	20.9	MW CG N	
55.00	2.165	77124	65.00	2.559	45.00	1.772	17.00	97.070	37.25	1.466	633.23	142.357	25.00	0.984	5.00	0.197	5	MW CG N	
55.00	2.165	77125	85.00	3.346	45.00	1.772	15.00	85.650	42.22	1.662	633.24	142.358	27.50	1.083	5.00	0.197	5.5	MW CG N	
55.00	2.165	77126	98.00	3.858	45.00	1.772	10.00	57.100	63.00	2.480	630.00	141.630	35.00	1.378	5.00	0.197	7	MW CG N	
55.00	2.165	77127	130.00	5.118	45.00	1.772	9.30	53.100	68.09	2.681	633.24	142.357	37.50	1.476	5.00	0.197	7.5	MW CG N	
55.00	2.165	77128	147.00	5.787	45.00	1.772	6.40	36.540	97.00	3.819	620.80	139.561	50.00	1.969	5.00	0.197	10	MW CG N	
55.00	2.165	77129	195.00	7.677	45.00	1.772	6.00	34.260	105.54	4.155	633.24	142.358	52.50	2.067	5.00	0.197	10.5	MW CG N	
55.00	2.165	77130	213.00	8.386	45.00	1.772	4.20	23.980	143.00	5.630	600.60	135.020	70.00	2.756	5.00	0.197	14	MW CG N	
55.00	2.165	77131	280.00	11.024	45.00	1.772	4.10	23.410	154.45	6.081	633.24	142.357	72.50	2.854	5.00	0.197	14.5	MW CG N	
55.00	2.165	77132	312.00	12.283	45.00	1.772	2.80	15.990	212.00	8.346	593.60	133.447	100.00	3.937	5.00	0.197	20	MW CG N	
55.00	2.165	77133	410.00	16.142	45.00	1.772	2.80	15.990	226.16	8.904	633.24	142.357	102.50	4.035	5.00	0.197	20.5	MW CG N	
55.80	2.197	77134	50.00	1.969	45.80	1.803	25.00	142.750	24.98	0.984	624.58	140.410	20.00	0.787	5.00	0.197	4	MW CG N	
55.80	2.197	77135	70.00	2.756	45.80	1.803	15.00	85.650	41.64	1.639	624.59	140.412	26.00	1.024	5.00	0.197	5.2	MW CG N	
55.80	2.197	77136	90.00	3.543	45.80	1.803	11.00	62.810	56.78	2.235	624.59	140.414	31.50	1.240	5.00	0.197	6.3	MW CG N	
55.80	2.197	77137	110.00	4.331	45.80	1.803	8.90	50.820	70.18	2.763	624.58	140.412	37.50	1.476	5.00	0.197	7.5	MW CG N	
55.80	2.197	77138	130.00	5.118	45.80	1.803	7.40	42.260	84.40	3.323	624.59	140.414	43.00	1.693	5.00	0.197	8.6	MW CG N	
55.80	2.197	77139	200.00	7.874	45.80	1.803	4.70	26.840	132.89	5.232	624.59	140.413	62.50	2.461	5.00	0.197	12.5	MW CG N	
56.35	2.219	77140	60.00	2.362	43.65	1.719	37.00	211.280	25.20	0.992	932.40	209.612	34.80	1.370	6.35	0.250	5.5	MW CG N	
56.35	2.219	77141	80.00	3.150	43.65	1.719	37.00	211.280	32.67	1.286	1208.75	271.739	34.80	1.370	6.35	0.250	5.5	MW CG N	
56.35	2.219	77142	89.00	3.504	43.65	1.719	23.00	131.330	40.68	1.602	935.64	210.340	48.32	1.902	6.35	0.250	7.6	MW CG N	
56.35	2.219	77143	115.00	4.528	43.65	1.719	23.00	131.330	52.56	2.069	1208.77	271.741	48.32	1.902	6.35	0.250	7.6	MW CG N	
56.35	2.219	77144	133.00	5.236	43.65	1.719	15.00	85.650	65.69	2.586	985.35	221.516	67.31	2.650	6.35	0.250	10.6	MW CG N	
56.35	2.219	77145	175.00	6.890	43.65	1.719	15.00	85.650	80.58	3.173	1208.76	271.740	67.31	2.650	6.35	0.250	10.6	MW CG N	
56.35	2.219	77146	191.00	7.520	43.65	1.719	10.00	57.100	96.45	3.797	964.50	216.828	94.55	3.722	6.35	0.250	14.9	MW CG N	
56.35	2.219	77147	250.00	9.843	43.65	1.719	10.00	57.100	120.88	4.759	1208.77	271.742	94.55	3.722	6.35	0.250	14.9	MW CG N	
56.35	2.219	77148	277.00	10.906	43.65	1.719	6.90	39.400	145.62	5.733	1004.78	225.883	131.38	5.172	6.35	0.250	20.7	MW CG N	
56.35	2.219	77149	365.00	14.370	43.65	1.719	6.90	39.400	175.18	6.897	1208.76	271.741	131.38	5.172	6.35	0.250	20.7	MW CG N	
57.77	2.274	77150	50.00	1.969	45.83	1.804	43.00	245.540	22.91	0.902	985.04	221.447	24.54	0.966	5.97	0.235	4.1	MW CG N	
57.77	2.274	77151	70.00	2.756	45.83	1.804	27.00	154.170	36.48	1.436	985.04	221.446	32.00	1.260	5.97	0.235	5.4	MW CG N	
57.77	2.274	77152	90.00	3.543	45.83	1.804	20.00	114.200	49.25	1.939	985.04	221.446	38.98	1.535	5.97	0.235	6.5	MW CG N	
57.77	2.274	77153	110.00	4.331	45.83	1.804	16.00	91.360	61.57	2.424	985.04	221.446	45.73	1.800	5.97	0.235	7.7	MW CG N	
57.77	2.274	77154	130.00	5.118	45.83	1.804	13.00	74.230	75.77	2.983	985.05	221.448	53.55	2.108	5.97	0.235	9	MW CG N	
57.77	2.274	77155	150.00	5.906	45.83	1.804	11.00	62.810	88.87	3.499	977.57	219.767	61.13	2.407	5.97	0.235	10.2	MW CG N	
57.77																			



Metric Compression Springs


O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Mat'l	Ends	Finish								
64.99	2.559	77178	150.00	5.906	50.61	1.993	17.00	97.070	77.60	3.055	1319.20	296.568	72.40	2.850	7.19	0.283	10.1	MW	CG	N
64.99	2.559	77179	200.00	7.874	50.61	1.993	12.00	68.520	103.44	4.072	1241.28	279.051	96.56	3.802	7.19	0.283	13.4	MW	CG	N
64.99	2.559	77180	250.00	9.843	50.61	1.993	9.50	54.250	131.80	5.189	1252.10	281.483	118.20	4.654	7.19	0.283	16.4	MW	CG	N
68.00	2.677	77181	89.00	3.504	58.00	2.283	8.50	48.540	60.79	2.393	516.72	116.164	25.00	0.984	5.00	0.197	5	MW	CG	N
68.00	2.677	77182	120.00	4.724	58.00	2.283	7.30	41.680	70.79	2.787	516.73	116.166	27.50	1.083	5.00	0.197	5.5	MW	CG	N
68.00	2.677	77183	136.00	5.354	58.00	2.283	5.10	29.120	101.00	3.976	515.10	115.799	35.00	1.378	5.00	0.197	7	MW	CG	N
68.00	2.677	77184	180.00	7.087	58.00	2.283	4.60	26.270	112.33	4.423	516.73	116.165	37.50	1.476	5.00	0.197	7.5	MW	CG	N
68.00	2.677	77185	206.00	8.110	58.00	2.283	3.20	18.270	156.00	6.142	499.20	112.225	50.00	1.969	5.00	0.197	10	MW	CG	N
68.00	2.677	77186	275.00	10.827	58.00	2.283	3.00	17.130	172.24	6.781	516.73	116.165	52.50	2.067	5.00	0.197	10.5	MW	CG	N
68.00	2.677	77187	300.00	11.811	58.00	2.283	2.10	11.990	230.00	9.055	483.00	108.583	70.00	2.756	5.00	0.197	14	MW	CG	N
68.00	2.677	77188	395.00	15.551	58.00	2.283	2.00	11.420	258.36	10.172	516.73	116.165	72.50	2.854	5.00	0.197	14.5	MW	CG	N
68.00	2.677	77189	440.00	17.323	58.00	2.283	1.40	7.990	340.00	13.386	476.00	107.009	100.00	3.937	5.00	0.197	20	MW	CG	N
68.00	2.677	77190	585.00	23.031	58.00	2.283	1.40	7.990	369.09	14.531	516.73	116.165	102.50	4.035	5.00	0.197	20.5	MW	CG	N
69.35	2.730	77191	78.00	3.071	56.65	2.230	21.00	119.910	45.81	1.804	962.01	216.269	32.19	1.267	6.35	0.250	5.1	MW	CG	N
69.35	2.730	77192	105.00	4.134	56.65	2.230	18.00	102.780	55.21	2.174	993.78	223.411	35.43	1.395	6.35	0.250	5.6	MW	CG	N
69.35	2.730	77193	118.00	4.646	56.65	2.230	12.00	68.520	71.20	2.803	854.40	192.077	46.80	1.843	6.35	0.250	7.4	MW	CG	N
69.35	2.730	77194	155.00	6.102	56.65	2.230	12.00	68.520	82.82	3.260	993.79	223.413	46.80	1.843	6.35	0.250	7.4	MW	CG	N
69.35	2.730	77195	177.00	6.969	56.65	2.230	7.50	42.830	109.75	4.321	823.13	185.046	67.25	2.648	6.35	0.250	10.6	MW	CG	N
69.35	2.730	77196	235.00	9.252	56.65	2.230	7.60	43.400	130.76	5.148	993.79	223.413	66.55	2.620	6.35	0.250	10.5	MW	CG	N
69.35	2.730	77197	255.00	10.039	56.65	2.230	5.10	29.120	162.04	6.380	826.40	185.783	92.96	3.660	6.35	0.250	14.6	MW	CG	N
69.35	2.730	77198	340.00	13.386	56.65	2.230	5.10	29.120	194.86	7.672	993.79	223.412	92.96	3.660	6.35	0.250	14.6	MW	CG	N
69.35	2.730	77199	373.00	14.685	56.65	2.230	3.50	19.990	243.33	9.580	851.66	191.460	129.67	5.105	6.35	0.250	20.4	MW	CG	N
69.35	2.730	77200	500.00	19.685	56.65	2.230	3.50	19.990	283.94	11.179	993.79	223.412	129.67	5.105	6.35	0.250	20.4	MW	CG	N
86.35	3.400	77201	108.00	4.252	73.65	2.900	9.00	51.390	73.07	2.877	657.63	147.841	34.93	1.375	6.35	0.250	5.5	MW	CG	N
86.35	3.400	77202	145.00	5.709	73.65	2.900	9.00	51.390	89.50	3.524	805.51	181.086	34.93	1.375	6.35	0.250	5.5	MW	CG	N
86.35	3.400	77203	165.00	6.496	73.65	2.900	5.70	32.550	117.25	4.616	668.33	150.246	47.75	1.880	6.35	0.250	7.5	MW	CG	N
86.35	3.400	77204	220.00	8.661	73.65	2.900	5.70	32.550	141.32	5.564	805.51	181.085	47.75	1.880	6.35	0.250	7.5	MW	CG	N
86.35	3.400	77205	250.00	9.843	73.65	2.900	3.70	21.130	183.26	7.215	678.06	152.434	66.74	2.628	6.35	0.250	10.5	MW	CG	N
86.35	3.400	77206	335.00	13.189	73.65	2.900	3.70	21.130	217.70	8.571	805.51	181.085	66.74	2.628	6.35	0.250	10.5	MW	CG	N
86.35	3.400	77207	363.00	14.291	73.65	2.900	2.50	14.280	270.35	10.644	675.88	151.943	92.65	3.648	6.35	0.250	14.6	MW	CG	N
86.35	3.400	77208	490.00	19.291	73.65	2.900	2.50	14.280	322.20	12.685	805.51	181.085	92.65	3.648	6.35	0.250	14.6	MW	CG	N
86.35	3.400	77209	632.00	24.882	73.65	2.900	1.70	9.710	473.83	18.655	805.50	181.085	130.30	5.130	6.35	0.250	20.5	MW	CG	N
86.35	3.400	77210	720.00	28.346	73.65	2.900	1.70	9.710	473.83	18.655	805.50	181.085	130.30	5.130	6.35	0.250	20.5	MW	CG	N



316 Stainless Steel Compression Springs


316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.040	1.02	60001S	0.100	2.54	0.028	0.71	7.430	1.30	0.022	0.56	0.162	0.72	0.051	1.30	0.006	0.15	7.5	316 SS	C	P
0.040	1.02	60002S	0.150	3.81	0.028	0.71	4.620	0.81	0.035	0.89	0.162	0.72	0.072	1.83	0.006	0.15	11	316 SS	C	P
0.040	1.02	60003S	0.200	5.08	0.028	0.71	3.350	0.59	0.048	1.22	0.162	0.72	0.092	2.34	0.006	0.15	14.3	316 SS	C	P
0.040	1.02	60004S	0.250	6.35	0.028	0.71	2.620	0.46	0.062	1.58	0.162	0.72	0.112	2.84	0.006	0.15	17.7	316 SS	C	P
0.040	1.02	60005S	0.300	7.62	0.028	0.71	2.160	0.38	0.075	1.91	0.162	0.72	0.132	3.35	0.006	0.15	21	316 SS	C	P
0.040	1.02	60006S	0.350	8.89	0.028	0.71	1.830	0.32	0.089	2.26	0.162	0.72	0.153	3.89	0.006	0.15	24.5	316 SS	C	P
0.040	1.02	60007S	0.400	10.16	0.028	0.71	1.590	0.28	0.102	2.59	0.162	0.72	0.173	4.39	0.006	0.15	27.8	316 SS	C	P
0.040	1.02	60008S	0.450	11.43	0.028	0.71	1.410	0.25	0.115	2.92	0.162	0.72	0.193	4.90	0.006	0.15	31.2	316 SS	C	P
0.040	1.02	60009S	0.500	12.70	0.028	0.71	1.270	0.22	0.128	3.25	0.162	0.72	0.214	5.44	0.006	0.15	34.7	316 SS	C	P
0.040	1.02	60010S	0.100	2.54	0.026	0.66	14.890	2.61	0.018	0.46	0.274	1.22	0.060	1.52	0.007	0.18	7.6	316 SS	C	P
0.040	1.02	60011S	0.150	3.81	0.026	0.66	9.120	1.60	0.030	0.76	0.274	1.22	0.085	2.16	0.007	0.18	11.1	316 SS	C	P
0.040	1.02	60012S	0.200	5.08	0.026	0.66	6.570	1.15	0.042	1.07	0.274	1.22	0.110	2.79	0.007	0.18	14.7	316 SS	C	P
0.040	1.02	60013S	0.250	6.35	0.026	0.66	5.140	0.90	0.053	1.35	0.274	1.22	0.135	3.43	0.007	0.18	18.3	316 SS	C	P
0.040	1.02	60014S	0.300	7.62	0.026	0.66	4.220	0.74	0.065	1.65	0.274	1.22	0.160	4.06	0.007	0.18	21.9	316 SS	C	P
0.040	1.02	60015S	0.350	8.89	0.026	0.66	3.570	0.63	0.077	1.96	0.274	1.22	0.184	4.67	0.007	0.18	25.3	316 SS	C	P
0.040	1.02	60016S	0.400	10.16	0.026	0.66	3.110	0.54	0.088	2.24	0.274	1.22	0.209	5.31	0.007	0.18	28.9	316 SS	C	P
0.040	1.02	60017S	0.450	11.43	0.026	0.66	2.740	0.48	0.100	2.54	0.274	1.22	0.234	5.94	0.007	0.18	32.4	316 SS	C	P
0.040	1.02	60018S	0.500	12.70	0.026	0.66	2.460	0.43	0.111	2.82	0.274	1.22	0.259	6.58	0.007	0.18	36	316 SS	C	P
0.057	1.45	60019S	0.130	3.18	0.045	1.14	3.170	0.55	0.037	0.94	0.117	0.52	0.041	1.04	0.006	0.15	5.8	316 SS	C	P
0.057	1.45	60020S	0.190	4.78	0.045	1.14	2.000	0.35	0.059	1.50	0.117	0.52	0.054	1.37	0.006	0.15	8	316 SS	C	P
0.057	1.45	60021S	0.250	6.35	0.045	1.14	1.500	0.26	0.078	1.98	0.117	0.52	0.066	1.68	0.006	0.15	10	316 SS	C	P
0.057	1.45	60022S	0.310	7.95	0.045	1.14	1.170	0.20	0.100	2.54	0.117	0.52	0.081	2.06	0.006	0.15	12.5	316 SS	C	P
0.057	1.45	60023S	0.380	9.53	0.045	1.14	0.920	0.16	0.128	3.25	0.117	0.52	0.096	2.44	0.006	0.15	15	316 SS	C	P
0.057	1.45	60024S	0.440	11.13	0.045	1.14	0.830	0.15	0.140	3.56	0.117	0.52	0.108	2.74	0.006	0.15	17	316 SS	C	P
0.057	1.45	60025S	0.500	12.70	0.045	1.14	0.750	0.13	0.156	3.96	0.117	0.52	0.120	3.05	0.006	0.15	19	316 SS	C	P
0.057	1.45	60026S	0.560	14.30	0.045	1.14	0.580	0.10	0.201	5.11	0.117	0.52	0.154	3.91	0.006	0.15	24.7	316 SS	C	P
0.057	1.45	60027S	0.630	15.88	0.045	1.14	0.500	0.09	0.234	5.94	0.117	0.52	0.174	4.42	0.006	0.15	28	316 SS	C	P
0.057	1.45	60028S	0.130	3.18	0.043	1.09	5.750	1.01	0.035	0.89	0.199	0.89	0.051	1.30	0.007	0.18	6.3	316 SS	C	P
0.057	1.45	60029S	0.190	4.78	0.043	1.09	3.420	0.60	0.058	1.47	0.199	0.89	0.070	1.78	0.007	0.18	9	316 SS	C	P
0.057	1.45	60030S	0.250	6.35	0.043	1.09	2.500	0.44	0.080	2.03	0.199	0.89	0.090	2.29	0.007	0.18	11.9	316 SS	C	P
0.057	1.45	60031S	0.310	7.95	0.043	1.09	2.000	0.35	0.100	2.54	0.199	0.89	0.105	2.67	0.007	0.18	14	316 SS	C	P
0.057	1.45	60032S	0.380	9.53	0.043	1.09	1.750	0.31	0.114	2.90	0.199	0.89	0.119	3.02	0.007	0.18	16	316 SS	C	P
0.057	1.45	60033S	0.440	11.13	0.043	1.09	1.420	0.25	0.141	3.58	0.199	0.89	0.140	3.56	0.007	0.18	19	316 SS	C	P
0.057	1.45	60034S	0.500	12.70	0.043	1.09	1.250	0.22	0.159	4.04	0.199	0.89	0.158	4.01	0.007	0.18	21.6	316 SS	C	P
0.057	1.45	60035S	0.560	14.30	0.043	1.09	1.080	0.19	0.184	4.67	0.199	0.89	0.173	4.39	0.007	0.18	23.7	316 SS	C	P
0.057	1.45	60036S	0.630	15.88	0.043	1.09	0.920	0.16	0.217	5.51	0.199	0.89	0.199	5.05	0.007	0.18	27.4	316 SS	C	P
0.057	1.45	60037S	0.130	3.18	0.041	1.04	9.660	1.69	0.028	0.71	0.270	1.20	0.060	1.52	0.008	0.20	6.5	316 SS	C	P
0.057	1.45	60038S	0.190	4.78	0.041	1.04	6.330	1.11	0.043	1.09	0.270	1.20	0.080	2.03	0.008	0.20	9	316 SS	C	P
0.057	1.45	60039S	0.250	6.35	0.041	1.04	4.330	0.76	0.062	1.58	0.270	1.20	0.104	2.64	0.008	0.20	12	316 SS	C	P
0.057	1.45	60040S	0.310	7.95	0.041	1.04	3.330	0.58	0.081	2.06	0.270	1.20	0.128	3.25	0.008	0.20	15	316 SS	C	P
0.057	1.45	60041S	0.380	9.53	0.041	1.04	2.830	0.50	0.095	2.41	0.270	1.20	0.148	3.76	0.008	0.20	17.5	316 SS	C	P
0.057	1.45	60042S	0.440	11.13	0.041	1.04	2.330	0.41	0.116	2.95	0.270	1.20	0.172	4.37	0.008	0.20	20.5	316 SS	C	P
0.057	1.45	60043S	0.500	12.70	0.041	1.04	2.000	0.35	0.135	3.43	0.270	1.20	0.196	4.98	0.008	0.20	23.5	316 SS	C	P
0.057	1.45	60044S	0.560	14.30	0.041	1.04	1.830	0.32	0.148	3.76	0.270	1.20	0.210	5.33	0.008	0.20	25.3	316 SS	C	P
0.057	1.45	60045S	0.630	15.88	0.041	1.04	1.670	0.29	0.162	4.12	0.270	1.20	0.243	6.17	0.008	0.20	29.4	316 SS	C	P
0.062	1.58	66000S	0.130	3.30	0.042	1.07	17.780	3.11	0.028	0.71	0.498	2.22	0.080	2.03	0.010	0.25	7	316 SS	C	P
0.062	1.58	66001S	0.130	3.30	0.048	1.22	3.608	0.63	0.049	1.25	0.177	0.79	0.056	1.42	0.007	0.18	7	316 SS	C	P
0.062	1.58	66002S	0.130	3.30	0.042	1.07	14.817	2.59	0.034	0.86	0.504	2.24	0.090	2.29	0.010	0.25	8	316 SS	C	P
0.062	1.58	66004S	0.160	4.06	0.050	1.27	0.636	0.11	0.055	1.40	0.035	0.16	0.105	2.67	0.006	0.15	16.5	316 SS	C	P
0.062	1.58	66006S	0.190	4.83	0.050	1.27	1.537	0.27	0.073	1.85	0.112	0.50	0.054	1.37	0.006	0.15	8	316 SS	C	P
0.062	1.58	66007S	0.250	6.35	0.046	1.17	4.645	0.81	0.056	1.42	0.260	1.16	0.080	2.03	0.008	0.20	9	316 SS	C	P
0.062	1.58	66008S	0.250	6.35	0.042	1.07	8.082	1.41	0.062	1.58	0.501	2.23	0.140	3.56	0.010	0.25	13	316 SS	C	P
0.062	1.58	66009S	0.280	7.11	0.046	1.17	2.601	0.46	0.100	2.54	0.260	1.16	0.124	3.15	0.008	0.20	14.5	316 SS	C	P
0.062	1.58	66010S	0.310	7.87	0.046	1.17	4.485	0.79	0.058	1.47	0.260	1.16	0.082	2.08	0.008	0.20	9.3	316 SS	C	P
0.062	1.58	66011S	0.380	9.65	0.042	1.07	7													




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length		Wire Dia. Inches mm		Total Coils	Mat'l	Ends	Finish	
0.063	1.60	60056S	0.190	4.78	0.047	1.19	5.920	1.04	0.042	1.07	0.247	1.10	0.068	1.73	0.008	0.20	7.5	316 SS C P
0.063	1.60	60057S	0.250	6.35	0.047	1.19	4.300	0.75	0.057	1.45	0.247	1.10	0.084	2.13	0.008	0.20	9.5	316 SS C P
0.063	1.60	60058S	0.310	7.95	0.047	1.19	3.370	0.59	0.073	1.85	0.247	1.10	0.100	2.54	0.008	0.20	11.5	316 SS C P
0.063	1.60	60059S	0.380	9.53	0.047	1.19	2.770	0.48	0.089	2.26	0.247	1.10	0.116	2.95	0.008	0.20	13.5	316 SS C P
0.063	1.60	60060S	0.440	11.13	0.047	1.19	2.350	0.41	0.105	2.67	0.247	1.10	0.133	3.38	0.008	0.20	15.6	316 SS C P
0.063	1.60	60061S	0.500	12.70	0.047	1.19	2.040	0.36	0.121	3.07	0.247	1.10	0.149	3.78	0.008	0.20	17.6	316 SS C P
0.063	1.60	60062S	0.560	14.30	0.047	1.19	1.800	0.32	0.137	3.48	0.247	1.10	0.165	4.19	0.008	0.20	19.6	316 SS C P
0.063	1.60	60063S	0.630	15.88	0.047	1.19	1.620	0.28	0.153	3.89	0.247	1.10	0.182	4.62	0.008	0.20	21.8	316 SS C P
0.063	1.60	60064S	0.130	3.18	0.045	1.14	12.760	2.23	0.029	0.74	0.370	1.65	0.064	1.63	0.009	0.23	6.1	316 SS C P
0.063	1.60	60065S	0.190	4.78	0.045	1.14	7.770	1.36	0.048	1.22	0.370	1.65	0.087	2.21	0.009	0.23	8.7	316 SS C P
0.063	1.60	60066S	0.250	6.35	0.045	1.14	5.610	0.98	0.066	1.68	0.370	1.65	0.111	2.82	0.009	0.23	11.3	316 SS C P
0.063	1.60	60067S	0.310	7.95	0.045	1.14	4.370	0.77	0.085	2.16	0.370	1.65	0.134	3.40	0.009	0.23	13.9	316 SS C P
0.063	1.60	60068S	0.380	9.53	0.045	1.14	3.590	0.63	0.103	2.62	0.370	1.65	0.157	3.99	0.009	0.23	16.4	316 SS C P
0.063	1.60	60069S	0.440	11.13	0.045	1.14	3.040	0.53	0.122	3.10	0.370	1.65	0.181	4.60	0.009	0.23	19.1	316 SS C P
0.063	1.60	60070S	0.500	12.70	0.045	1.14	2.640	0.46	0.140	3.56	0.370	1.65	0.204	5.18	0.009	0.23	21.7	316 SS C P
0.063	1.60	60071S	0.560	14.30	0.045	1.14	2.330	0.41	0.159	4.04	0.370	1.65	0.228	5.79	0.009	0.23	24.3	316 SS C P
0.063	1.60	60072S	0.630	15.88	0.045	1.14	2.090	0.37	0.177	4.50	0.370	1.65	0.251	6.38	0.009	0.23	26.9	316 SS C P
0.063	1.60	60073S	0.130	3.18	0.043	1.09	20.340	3.56	0.023	0.58	0.470	2.09	0.071	1.80	0.010	0.25	6.1	316 SS C P
0.063	1.60	60074S	0.190	4.78	0.043	1.09	12.230	2.14	0.038	0.97	0.470	2.09	0.099	2.51	0.010	0.25	8.9	316 SS C P
0.063	1.60	60075S	0.250	6.35	0.043	1.09	8.780	1.54	0.054	1.37	0.470	2.09	0.126	3.20	0.010	0.25	11.6	316 SS C P
0.063	1.60	60076S	0.310	7.95	0.043	1.09	6.830	1.20	0.069	1.75	0.470	2.09	0.153	3.89	0.010	0.25	14.3	316 SS C P
0.063	1.60	60077S	0.380	9.53	0.043	1.09	5.600	0.98	0.084	2.13	0.470	2.09	0.180	4.57	0.010	0.25	17	316 SS C P
0.063	1.60	60078S	0.440	11.13	0.043	1.09	4.740	0.83	0.099	2.52	0.470	2.09	0.207	5.26	0.010	0.25	19.7	316 SS C P
0.063	1.60	60079S	0.500	12.70	0.043	1.09	4.120	0.72	0.114	2.90	0.470	2.09	0.234	5.94	0.010	0.25	22.4	316 SS C P
0.063	1.60	60080S	0.560	14.30	0.043	1.09	3.620	0.63	0.130	3.30	0.470	2.09	0.261	6.63	0.010	0.25	25.1	316 SS C P
0.063	1.60	60081S	0.630	15.88	0.043	1.09	3.250	0.57	0.145	3.68	0.470	2.09	0.288	7.32	0.010	0.25	27.8	316 SS C P
0.068	1.73	66017S	0.340	8.64	0.052	1.32	2.257	0.40	0.106	2.69	0.239	1.06	0.108	2.74	0.008	0.20	12.5	316 SS C P
0.072	1.83	66018S	0.500	12.70	0.042	1.07	48.815	8.54	0.028	0.71	1.367	6.08	0.150	3.81	0.015	0.38	9	316 SS C P
0.075	1.91	66019S	0.200	5.08	0.059	1.50	3.783	0.66	0.058	1.47	0.219	0.97	0.060	1.52	0.008	0.20	6.5	316 SS C P
0.078	1.98	66020S	0.190	4.83	0.066	1.68	0.395	0.07	0.106	2.69	0.042	0.19	0.084	2.13	0.006	0.15	13	316 SS C P
0.078	1.98	66021S	0.250	6.35	0.048	1.22	42.180	7.38	0.030	0.76	1.265	5.63	0.135	3.43	0.015	0.38	8	316 SS C P
0.078	1.98	66023S	0.250	6.35	0.066	1.68	0.723	0.13	0.124	3.15	0.090	0.40	0.054	1.37	0.006	0.15	8	316 SS C P
0.078	1.98	66025S	0.340	8.64	0.054	1.37	10.018	1.75	0.067	1.70	0.671	2.99	0.144	3.66	0.012	0.31	11	316 SS C P
0.078	1.98	66026S	0.340	8.64	0.058	1.47	4.417	0.77	0.092	2.34	0.406	1.81	0.120	3.05	0.010	0.25	11	316 SS C P
0.078	1.98	66027S	0.500	12.70	0.066	1.68	0.164	0.03	0.323	8.20	0.053	0.24	0.177	4.50	0.006	0.15	28.5	316 SS C P
0.078	1.98	66028S	1.130	28.70	0.054	1.37	2.254	0.39	0.300	7.62	0.676	3.01	0.516	13.11	0.012	0.31	42	316 SS C P
0.084	2.13	68000S	0.280	7.11	0.072	1.83	0.683	0.12	0.123	3.12	0.084	0.37	0.048	1.22	0.006	0.15	7	316 SS C P
0.088	2.24	66029S	0.190	4.83	0.068	1.73	8.780	1.54	0.041	1.04	0.360	1.60	0.060	1.52	0.010	0.25	5	316 SS C P
0.088	2.24	66030S	0.340	8.64	0.056	1.42	33.766	5.91	0.040	1.02	1.351	6.01	0.152	3.86	0.016	0.41	8.5	316 SS C P
0.088	2.24	66082S	0.130	3.18	0.072	1.83	4.580	0.80	0.039	0.99	0.180	0.80	0.042	1.07	0.008	0.20	4.3	316 SS C P
0.088	2.24	60083S	0.190	4.78	0.072	1.83	2.920	0.51	0.062	1.58	0.180	0.80	0.052	1.32	0.008	0.20	5.5	316 SS C P
0.088	2.24	60084S	0.250	6.35	0.072	1.83	2.000	0.35	0.090	2.29	0.180	0.80	0.064	1.63	0.008	0.20	7	316 SS C P
0.088	2.24	60085S	0.310	7.95	0.072	1.83	1.670	0.29	0.108	2.74	0.180	0.80	0.072	1.83	0.008	0.20	8	316 SS C P
0.088	2.24	60086S	0.380	9.53	0.072	1.83	1.170	0.20	0.155	3.94	0.180	0.80	0.092	2.34	0.008	0.20	10.5	316 SS C P
0.088	2.24	60087S	0.440	11.13	0.072	1.83	1.080	0.19	0.166	4.22	0.180	0.80	0.096	2.44	0.008	0.20	11	316 SS C P
0.088	2.24	60088S	0.500	12.70	0.072	1.83	0.920	0.16	0.197	5.00	0.180	0.80	0.110	2.79	0.008	0.20	12.8	316 SS C P
0.088	2.24	60089S	0.560	14.30	0.072	1.83	0.830	0.15	0.216	5.49	0.180	0.80	0.120	3.05	0.008	0.20	14	316 SS C P
0.088	2.24	60090S	0.630	15.88	0.072	1.83	0.750	0.13	0.240	6.10	0.180	0.80	0.140	3.56	0.008	0.20	16.5	316 SS C P
0.088	2.24	60091S	0.690	17.48	0.072	1.83	0.700	0.12	0.258	6.55	0.180	0.80	0.143	3.63	0.008	0.20	16.9	316 SS C P
0.088	2.24	60092S	0.750	19.05	0.072	1.83	0.640	0.11	0.281	7.14	0.180	0.80	0.154	3.91	0.008	0.20	18.3	316 SS C P
0.088	2.24	60093S	0.130	3.18	0.068	1.73	10.580	1.85	0.033	0.84	0.346	1.54	0.055	1.40	0.010	0.25	4.5	316 SS C P
0.088	2.24	60094S	0.190	4.78	0.068	1.73	5.830	1.02	0.059	1.50	0.346	1.54	0.075	1.91	0.010	0.25	6.5	316 SS C P
0.088	2.24	60095S	0.250	6.35	0.068	1.73	4.330	0.76	0.080	2.03	0.346	1.54	0.090	2.29	0.010	0.25	8	316 SS C P
0.088	2.24	60096S	0.310	7.95	0.068	1.73	3.330	0.58	0.104	2.64	0.346	1.54	0.108	2.74	0.010	0.25	9.8	316 SS C P
0.088	2.24	60097S	0.380	9.53	0.068	1.73	2.750	0.48	0.126	3.20	0.346	1.54	0.125	3.18	0.010	0.25	11.5	316 SS C P
0.088	2.24	60098S	0.440	11.13	0.068	1.73	2.420	0.42	0.143	3.63	0.346	1.54	0.138	3.51	0.010	0.25	12.8	316 SS C P
0.088	2.24	60099S	0.500	12.70	0.068	1.73	2.080	0.37	0.166	4.2								




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg Max. Defl. Inches	Sugg Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish								
mm		mm	mm	N/mm	mm	N	mm	mm			C	P								
0.094	2.39	64000S	0.300	7.62	0.068	1.73	8.397	1.47	0.086	2.18	0.722	3.21	0.117	2.97	0.013	0.33	8	316 SS	O	P
0.094	2.39	66031S	0.160	4.06	0.068	1.73	20.670	3.62	0.035	0.89	0.723	3.22	0.081	2.06	0.013	0.33	5.3	316 SS	C	P
0.094	2.39	66032S	0.170	4.32	0.078	1.98	2.012	0.35	0.088	2.24	0.177	0.79	0.056	1.42	0.008	0.20	6	316 SS	C	P
0.094	2.39	66033S	0.190	4.83	0.072	1.83	6.239	1.09	0.071	1.80	0.443	1.97	0.089	2.26	0.011	0.28	7.1	316 SS	C	P
0.094	2.39	66034S	0.190	4.83	0.074	1.88	2.343	0.41	0.070	1.78	0.164	0.73	0.120	3.05	0.010	0.25	11	316 SS	C	P
0.094	2.39	66035S	0.220	5.59	0.074	1.88	1.622	0.28	0.060	1.52	0.097	0.43	0.160	4.06	0.010	0.25	15	316 SS	C	P
0.094	2.39	66036S	0.250	6.35	0.070	1.78	6.716	1.18	0.085	2.16	0.571	2.54	0.120	3.05	0.012	0.31	9	316 SS	C	P
0.094	2.39	66037S	0.250	6.35	0.066	1.68	18.758	3.28	0.048	1.22	0.900	4.00	0.112	2.85	0.014	0.36	7	316 SS	C	P
0.094	2.39	66038S	0.250	6.35	0.064	1.63	25.670	4.49	0.043	1.09	1.104	4.91	0.120	3.05	0.015	0.38	7	316 SS	C	P
0.094	2.39	66039S	0.250	6.35	0.082	2.08	0.340	0.06	0.190	4.83	0.065	0.29	0.060	1.52	0.006	0.15	9	316 SS	C	P
0.094	2.39	66040S	0.250	6.35	0.070	1.78	5.804	1.02	0.098	2.49	0.569	2.53	0.133	3.38	0.012	0.31	10.1	316 SS	C	P
0.094	2.39	66042S	0.310	7.87	0.068	1.73	13.436	2.35	0.054	1.37	0.726	3.23	0.104	2.64	0.013	0.33	7	316 SS	C	P
0.094	2.39	66043S	0.310	7.87	0.072	1.83	4.001	0.70	0.110	2.79	0.440	1.96	0.121	3.07	0.011	0.28	10	316 SS	C	P
0.094	2.39	66044S	0.310	7.87	0.070	1.78	4.701	0.82	0.121	3.07	0.569	2.53	0.156	3.96	0.012	0.31	12	316 SS	C	P
0.094	2.39	66046S	0.340	8.64	0.062	1.58	20.798	3.64	0.062	1.58	1.289	5.73	0.181	4.60	0.016	0.41	10.3	316 SS	C	P
0.094	2.39	66047S	0.340	8.64	0.058	1.47	37.365	6.54	0.048	1.22	1.794	7.98	0.198	5.03	0.018	0.46	10	316 SS	C	P
0.094	2.39	66048S	0.340	8.64	0.066	1.68	11.724	2.05	0.076	1.93	0.891	3.96	0.154	3.91	0.014	0.36	10	316 SS	C	P
0.094	2.39	66049S	0.380	9.65	0.066	1.68	11.724	2.05	0.076	1.93	0.891	3.96	0.154	3.91	0.014	0.36	10	316 SS	C	P
0.094	2.39	66050S	0.380	9.65	0.070	1.78	4.948	0.87	0.115	2.92	0.569	2.53	0.150	3.81	0.012	0.31	11.5	316 SS	C	P
0.094	2.39	66051S	0.380	9.65	0.070	1.78	3.134	0.55	0.164	4.17	0.514	2.29	0.216	5.49	0.012	0.31	17	316 SS	C	P
0.094	2.39	66052S	0.410	10.41	0.074	1.88	2.481	0.43	0.137	3.48	0.340	1.51	0.115	2.92	0.010	0.25	10.5	316 SS	C	P
0.094	2.39	66053S	0.410	10.41	0.058	1.47	37.365	6.54	0.048	1.22	1.794	7.98	0.198	5.03	0.018	0.46	10	316 SS	C	P
0.094	2.39	66054S	0.440	11.18	0.066	1.68	7.816	1.37	0.114	2.90	0.891	3.96	0.210	5.33	0.014	0.36	14	316 SS	C	P
0.094	2.39	66055S	0.440	11.18	0.062	1.58	15.693	2.75	0.082	2.08	1.287	5.73	0.224	5.69	0.016	0.41	13	316 SS	C	P
0.094	2.39	66058S	0.440	11.18	0.058	1.47	26.453	4.63	0.068	1.73	1.799	8.00	0.257	6.53	0.018	0.46	13.3	316 SS	C	P
0.094	2.39	66059S	0.440	11.18	0.060	1.52	20.789	3.64	0.073	1.85	1.518	6.75	0.238	6.05	0.017	0.43	13	316 SS	C	P
0.094	2.39	66060S	0.440	11.18	0.062	1.58	14.385	2.52	0.089	2.26	1.280	5.69	0.240	6.10	0.016	0.41	14	316 SS	C	P
0.094	2.39	66061S	0.440	11.18	0.064	1.63	12.835	2.25	0.085	2.16	1.091	4.85	0.195	4.95	0.015	0.38	12	316 SS	C	P
0.094	2.39	66062S	0.470	11.94	0.066	1.68	6.947	1.22	0.129	3.28	0.896	3.99	0.231	5.87	0.014	0.36	15.5	316 SS	C	P
0.094	2.39	66063S	0.500	12.70	0.074	1.88	1.406	0.25	0.243	6.17	0.342	1.52	0.180	4.57	0.010	0.25	17	316 SS	C	P
0.094	2.39	66064S	0.500	12.70	0.074	1.88	2.220	0.39	0.154	3.91	0.342	1.52	0.125	3.18	0.010	0.25	11.5	316 SS	C	P
0.094	2.39	66065S	0.500	12.70	0.074	1.88	1.528	0.27	0.223	5.66	0.341	1.52	0.168	4.27	0.010	0.25	15.8	316 SS	C	P
0.094	2.39	66066S	0.500	12.70	0.070	1.78	3.033	0.53	0.188	4.78	0.570	2.54	0.222	5.64	0.012	0.31	17.5	316 SS	C	P
0.094	2.39	66067S	0.500	12.70	0.066	1.68	5.862	1.03	0.152	3.86	0.891	3.96	0.266	6.76	0.014	0.36	18	316 SS	C	P
0.094	2.39	66068S	0.500	12.70	0.062	1.58	10.789	1.89	0.119	3.02	1.284	5.71	0.304	7.72	0.016	0.41	18	316 SS	C	P
0.094	2.39	66069S	0.500	12.70	0.068	1.73	6.398	1.12	0.113	2.87	0.723	3.22	0.176	4.47	0.013	0.33	12.5	316 SS	C	P
0.094	2.39	66070S	0.530	13.46	0.066	1.68	5.070	0.89	0.176	4.47	0.892	3.97	0.301	7.65	0.014	0.36	20.5	316 SS	C	P
0.094	2.39	66071S	0.530	13.46	0.064	1.63	6.417	1.12	0.170	4.32	1.091	4.85	0.345	8.76	0.015	0.38	22	316 SS	C	P
0.094	2.39	66072S	0.560	14.22	0.074	1.88	1.454	0.25	0.235	5.97	0.342	1.52	0.175	4.45	0.010	0.25	16.5	316 SS	C	P
0.094	2.39	66073S	0.560	14.22	0.068	1.73	3.481	0.61	0.207	5.26	0.721	3.21	0.290	7.37	0.013	0.33	21.3	316 SS	C	P
0.094	2.39	66074S	0.560	14.22	0.078	1.98	0.671	0.12	0.264	6.71	0.177	0.79	0.120	3.05	0.008	0.20	14	316 SS	C	P
0.094	2.39	66075S	0.590	14.99	0.066	1.68	5.684	1.00	0.157	3.99	0.892	3.97	0.273	6.93	0.014	0.36	18.5	316 SS	C	P
0.094	2.39	66076S	0.630	16.00	0.066	1.68	7.816	1.37	0.114	2.90	0.891	3.96	0.210	5.33	0.014	0.36	14	316 SS	C	P
0.094	2.39	66077S	0.630	16.00	0.070	1.78	2.765	0.48	0.206	5.23	0.570	2.54	0.240	6.10	0.012	0.31	19	316 SS	C	P
0.094	2.39	66078S	0.750	19.05	0.066	1.68	5.211	0.91	0.171	4.34	0.891	3.96	0.294	7.47	0.014	0.36	20	316 SS	C	P
0.094	2.39	66079S	0.810	20.57	0.074	1.88	0.541	0.10	0.390	9.91	0.211	0.94	0.420	10.67	0.010	0.25	41	316 SS	C	P
0.094	2.39	66080S	1.000	25.40	0.064	1.63	5.033	0.88	0.217	5.51	1.092	4.86	0.398	10.11	0.015	0.38	25.5	316 SS	O	P
0.094	2.39	66081S	1.310	33.27	0.064	1.63	3.291	0.58	0.332	8.43	1.093	4.86	0.630	16.00	0.015	0.38	41	316 SS	C	P
0.094	2.39	60118S	0.130	3.18	0.078	1.98	4.000	0.70	0.042	1.07	0.169	0.75	0.040	1.02	0.008	0.20	4	316 SS	C	P
0.094	2.39	60119S	0.190	4.78	0.078	1.98	2.460	0.43	0.069	1.75	0.169	0.75	0.050	1.27	0.008	0.20	5.3	316 SS	C	P
0.094	2.39	60120S	0.250	6.35	0.078	1.98	1.780	0.31	0.095	2.41	0.169	0.75	0.060	1.52	0.008	0.20	6.5	316 SS	C	P
0.094	2.39	60121S	0.310	7.95	0.078	1.98	1.400	0.25	0.121	3.07	0.169	0.75	0.070	1.78	0.008	0.20	7.8	316 SS	C	P
0.094	2.39	60122S	0.380	9.53	0.078	1.98	1.150	0.20	0.147	3.73	0.169	0.75	0.080	2.03	0.008	0.20	9	316 SS	C	P
0.094	2.39	60123S	0.440	11.13	0.078	1.98	0.980	0.17	0.174	4.42	0.169	0.75	0.090	2.29	0.008	0.20	10.3	316 SS	C	P
0.094	2.3																			




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.094	2.39	60145S	0.690	17.48	0.070	1.78	2.900	0.51	0.191	4.85	0.553	2.46	0.239	6.07	0.012	0.30	18.9	316 SS	C	P
0.094	2.39	60146S	0.750	19.05	0.070	1.78	2.620	0.46	0.212	5.39	0.553	2.46	0.261	6.63	0.012	0.30	20.8	316 SS	C	P
0.094	2.39	60147S	0.880	22.23	0.070	1.78	2.220	0.39	0.249	6.33	0.553	2.46	0.300	7.62	0.012	0.30	24	316 SS	C	P
0.094	2.39	60148S	1.000	25.40	0.070	1.78	1.940	0.34	0.285	7.24	0.553	2.46	0.339	8.61	0.012	0.30	27.3	316 SS	C	P
0.100	2.54	66082S	0.190	4.83	0.076	1.93	9.509	1.66	0.057	1.45	0.542	2.41	0.084	2.13	0.012	0.31	6	316 SS	C	P
0.100	2.54	66083S	0.200	5.08	0.080	2.03	3.429	0.60	0.094	2.39	0.322	1.43	0.080	2.03	0.010	0.25	7	316 SS	C	P
0.100	2.54	66084S	0.220	5.59	0.086	2.18	0.746	0.13	0.150	3.81	0.112	0.50	0.056	1.42	0.007	0.18	7	316 SS	C	P
0.100	2.54	66085S	0.250	6.35	0.080	2.03	3.118	0.55	0.103	2.62	0.321	1.43	0.085	2.16	0.010	0.25	7.5	316 SS	C	P
0.100	2.54	66086S	0.340	8.64	0.068	1.73	15.357	2.69	0.079	2.01	1.213	5.40	0.192	4.88	0.016	0.41	11	316 SS	C	P
0.102	2.59	60149S	0.250	6.35	0.086	2.18	1.590	0.28	0.098	2.49	0.156	0.69	0.055	1.40	0.008	0.20	5.9	316 SS	C	P
0.102	2.59	60150S	0.310	7.95	0.086	2.18	1.240	0.22	0.126	3.20	0.156	0.69	0.064	1.63	0.008	0.20	7	316 SS	C	P
0.102	2.59	60151S	0.380	9.53	0.086	2.18	1.030	0.18	0.153	3.89	0.156	0.69	0.072	1.83	0.008	0.20	8	316 SS	C	P
0.102	2.59	60152S	0.440	11.13	0.086	2.18	0.870	0.15	0.181	4.60	0.156	0.69	0.081	2.06	0.008	0.20	9.1	316 SS	C	P
0.102	2.59	60153S	0.500	12.70	0.086	2.18	0.760	0.13	0.206	5.23	0.156	0.69	0.089	2.26	0.008	0.20	10.1	316 SS	C	P
0.102	2.59	60154S	0.560	14.30	0.086	2.18	0.670	0.12	0.235	5.97	0.156	0.69	0.098	2.49	0.008	0.20	11.3	316 SS	C	P
0.102	2.59	60155S	0.630	15.88	0.086	2.18	0.600	0.11	0.261	6.63	0.156	0.69	0.106	2.69	0.008	0.20	12.3	316 SS	C	P
0.102	2.59	60156S	0.750	19.05	0.086	2.18	0.490	0.09	0.318	8.08	0.156	0.69	0.124	3.15	0.008	0.20	14.5	316 SS	C	P
0.102	2.59	60157S	0.880	22.23	0.086	2.18	0.430	0.07	0.368	9.35	0.156	0.69	0.141	3.58	0.008	0.20	16.6	316 SS	C	P
0.102	2.59	60158S	1.000	25.40	0.086	2.18	0.370	0.06	0.427	10.85	0.156	0.69	0.158	4.01	0.008	0.20	18.8	316 SS	C	P
0.102	2.59	60159S	0.250	6.35	0.082	2.08	3.420	0.60	0.088	2.24	0.301	1.34	0.080	2.03	0.010	0.25	7	316 SS	C	P
0.102	2.59	60160S	0.310	7.95	0.082	2.08	2.670	0.47	0.113	2.87	0.301	1.34	0.094	2.39	0.010	0.25	8.4	316 SS	C	P
0.102	2.59	60161S	0.380	9.53	0.082	2.08	2.170	0.38	0.139	3.53	0.301	1.34	0.107	2.72	0.010	0.25	9.7	316 SS	C	P
0.102	2.59	60162S	0.440	11.13	0.082	2.08	1.830	0.32	0.164	4.17	0.301	1.34	0.121	3.07	0.010	0.25	11.1	316 SS	C	P
0.102	2.59	60163S	0.500	12.70	0.082	2.08	1.580	0.28	0.190	4.83	0.301	1.34	0.135	3.43	0.010	0.25	12.5	316 SS	C	P
0.102	2.59	60164S	0.560	14.30	0.082	2.08	1.420	0.25	0.213	5.41	0.301	1.34	0.149	3.78	0.010	0.25	13.9	316 SS	C	P
0.102	2.59	60165S	0.630	15.88	0.082	2.08	1.250	0.22	0.241	6.12	0.301	1.34	0.163	4.14	0.010	0.25	15.3	316 SS	C	P
0.102	2.59	60166S	0.750	19.05	0.082	2.08	1.000	0.18	0.301	7.65	0.301	1.34	0.190	4.83	0.010	0.25	18	316 SS	C	P
0.102	2.59	60167S	0.880	22.23	0.082	2.08	0.920	0.16	0.329	8.36	0.301	1.34	0.218	5.54	0.010	0.25	20.8	316 SS	C	P
0.102	2.59	60168S	1.000	25.40	0.082	2.08	0.750	0.13	0.402	10.21	0.301	1.34	0.246	6.25	0.010	0.25	23.6	316 SS	C	P
0.102	2.59	60169S	0.250	6.35	0.080	2.03	5.080	0.89	0.083	2.11	0.420	1.87	0.088	2.24	0.011	0.28	7	316 SS	C	P
0.102	2.59	60170S	0.310	7.95	0.080	2.03	3.920	0.69	0.107	2.72	0.420	1.87	0.104	2.64	0.011	0.28	8.5	316 SS	C	P
0.102	2.59	60171S	0.380	9.53	0.080	2.03	3.250	0.57	0.129	3.28	0.420	1.87	0.119	3.02	0.011	0.28	9.8	316 SS	C	P
0.102	2.59	60172S	0.440	11.13	0.080	2.03	2.750	0.48	0.153	3.89	0.420	1.87	0.135	3.43	0.011	0.28	11.3	316 SS	C	P
0.102	2.59	60173S	0.500	12.70	0.080	2.03	2.330	0.41	0.180	4.57	0.420	1.87	0.150	3.81	0.011	0.28	12.6	316 SS	C	P
0.102	2.59	60174S	0.560	14.30	0.080	2.03	2.080	0.37	0.202	5.13	0.420	1.87	0.166	4.22	0.011	0.28	14.1	316 SS	C	P
0.102	2.59	60175S	0.630	15.88	0.080	2.03	1.830	0.32	0.229	5.82	0.420	1.87	0.182	4.62	0.011	0.28	15.5	316 SS	C	P
0.102	2.59	60176S	0.750	19.05	0.080	2.03	1.500	0.26	0.280	7.11	0.420	1.87	0.213	5.41	0.011	0.28	18.4	316 SS	C	P
0.102	2.59	60177S	0.880	22.23	0.080	2.03	1.330	0.23	0.315	8.00	0.420	1.87	0.244	6.20	0.011	0.28	21.2	316 SS	C	P
0.102	2.59	60178S	1.000	25.40	0.080	2.03	1.170	0.20	0.360	9.14	0.420	1.87	0.275	6.99	0.011	0.28	24	316 SS	C	P
0.102	2.59	60179S	0.250	6.35	0.078	1.98	7.080	1.24	0.072	1.83	0.513	2.28	0.101	2.57	0.012	0.30	7.4	316 SS	C	P
0.102	2.59	60180S	0.310	7.95	0.078	1.98	5.250	0.92	0.098	2.49	0.513	2.28	0.120	3.05	0.012	0.30	9	316 SS	C	P
0.102	2.59	60181S	0.380	9.53	0.078	1.98	4.330	0.76	0.118	3.00	0.513	2.28	0.139	3.53	0.012	0.30	10.6	316 SS	C	P
0.102	2.59	60182S	0.440	11.13	0.078	1.98	3.670	0.64	0.140	3.56	0.513	2.28	0.158	4.01	0.012	0.30	12.2	316 SS	C	P
0.102	2.59	60183S	0.500	12.70	0.078	1.98	3.170	0.55	0.162	4.12	0.513	2.28	0.176	4.47	0.012	0.30	13.7	316 SS	C	P
0.102	2.59	60184S	0.560	14.30	0.078	1.98	2.750	0.48	0.187	4.75	0.513	2.28	0.195	4.95	0.012	0.30	15.3	316 SS	C	P
0.102	2.59	60185S	0.630	15.88	0.078	1.98	2.500	0.44	0.205	5.21	0.513	2.28	0.214	5.44	0.012	0.30	16.8	316 SS	C	P
0.102	2.59	60186S	0.750	19.05	0.078	1.98	2.080	0.37	0.246	6.25	0.513	2.28	0.251	6.38	0.012	0.30	19.9	316 SS	C	P
0.102	2.59	60187S	0.880	22.23	0.078	1.98	1.750	0.31	0.293	7.44	0.513	2.28	0.289	7.34	0.012	0.30	23.1	316 SS	C	P
0.102	2.59	60188S	1.000	25.40	0.078	1.98	1.500	0.26	0.342	8.69	0.513	2.28	0.326	8.28	0.012	0.30	26.2	316 SS	C	P
0.109	2.77	66087S	0.170	4.32	0.069	1.75	141.850	24.82	0.015	0.38	2.128	9.47	0.100	2.54	0.020	0.51	4	316 SS	C	P
0.109	2.77	66088S	0.190	4.83	0.089	2.26	3.221	0.56	0.092	2.34	0.296	1.32	0.070	1.78	0.010	0.25	6	316 SS	C	P
0.109	2.77	66089S	0.190	4.83	0.093	2.36	0.994	0.17	0.126	3.20	0.125	0.56	0.064	1.63	0.008	0.20	7	316 SS	C	P
0.109	2.77	66090S	0.220	5.59	0.093	2.36	0.710	0.12	0.140	3.56	0.099	0.44	0.080	2.03	0.008	0.20	9	316 SS	C	P
0.109	2.77	66091S	0.250	6.35	0.089	2.26	2.147	0.38	0.138	3.51	0.296	1.32	0.090	2.29	0.010	0.25	8	316 SS	C	P
0.109	2.77	66092S	0.250	6.35	0.081	2.06	5.092	0.89	0.054	1.										




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends C P								
0.109	2.77	66116S	0.630	16.00	0.067	1.70	25.481	4.46	0.097	2.46	2.472	11.00	0.357	9.07	0.021	0.53	16	316 SS	C P
0.109	2.77	66117S	0.630	16.00	0.069	1.75	21.823	3.82	0.098	2.49	2.139	9.51	0.300	7.62	0.020	0.51	15	316 SS	CG P
0.109	2.77	66118S	0.630	16.00	0.085	2.16	1.775	0.31	0.280	7.11	0.497	2.21	0.228	5.79	0.012	0.31	18	316 SS	C P
0.109	2.77	66119S	0.660	16.76	0.081	2.06	2.546	0.45	0.307	7.80	0.782	3.48	0.350	8.89	0.014	0.36	24	316 SS	C P
0.109	2.77	66120S	0.690	17.53	0.079	2.01	3.463	0.61	0.276	7.01	0.956	4.25	0.360	9.14	0.015	0.38	24	316 SS	CG P
0.109	2.77	66121S	0.750	19.05	0.085	2.16	1.495	0.26	0.332	8.43	0.496	2.21	0.264	6.71	0.012	0.31	21	316 SS	C P
0.109	2.77	66122S	0.880	22.35	0.095	2.41	0.166	0.03	0.620	15.75	0.103	0.46	0.140	3.56	0.007	0.18	19	316 SS	C P
0.109	2.77	66123S	1.130	28.70	0.077	1.96	2.680	0.47	0.421	10.69	1.128	5.02	0.656	16.66	0.016	0.41	40	316 SS	C P
0.109	2.77	66124S	1.190	30.23	0.085	2.16	1.183	0.21	0.420	10.67	0.497	2.21	0.324	8.23	0.012	0.31	26	316 SS	C P
0.109	2.77	66125S	1.250	31.75	0.083	2.11	1.614	0.28	0.390	9.91	0.629	2.80	0.364	9.25	0.013	0.33	27	316 SS	C P
0.109	2.77	66126S	1.250	31.75	0.087	2.21	0.671	0.12	0.574	14.58	0.385	1.71	0.352	8.94	0.011	0.28	31	316 SS	C P
0.109	2.77	66127S	1.310	33.27	0.077	1.96	5.092	0.89	0.221	5.61	1.125	5.00	0.352	8.94	0.016	0.41	22	316 SS	CG P
0.114	2.90	66128S	0.250	6.35	0.082	2.08	10.487	1.84	0.069	1.75	0.724	3.22	0.181	4.60	0.016	0.41	10.3	316 SS	C P
0.114	2.90	66129S	0.310	7.87	0.086	2.18	8.351	1.46	0.090	2.29	0.752	3.35	0.123	3.12	0.014	0.36	7.8	316 SS	C P
0.114	2.90	66130S	1.000	25.40	0.094	2.39	0.794	0.14	0.358	9.09	0.284	1.26	0.170	4.32	0.010	0.25	16	316 SS	C P
0.120	3.05	66131S	0.440	11.18	0.092	2.34	5.040	0.88	0.142	3.61	0.716	3.19	0.140	3.56	0.014	0.36	10	316 SS	CG P
0.120	3.05	60189S	0.250	6.35	0.100	2.54	2.670	0.47	0.097	2.46	0.258	1.15	0.067	1.70	0.010	0.25	5.7	316 SS	C P
0.120	3.05	60190S	0.310	7.95	0.100	2.54	2.080	0.37	0.124	3.15	0.258	1.15	0.077	1.96	0.010	0.25	6.7	316 SS	C P
0.120	3.05	60191S	0.380	9.53	0.100	2.54	1.750	0.31	0.148	3.76	0.258	1.15	0.087	2.21	0.010	0.25	7.7	316 SS	C P
0.120	3.05	60192S	0.440	11.13	0.100	2.54	1.420	0.25	0.182	4.62	0.258	1.15	0.098	2.49	0.010	0.25	8.8	316 SS	C P
0.120	3.05	60193S	0.500	12.70	0.100	2.54	1.250	0.22	0.207	5.26	0.258	1.15	0.108	2.74	0.010	0.25	9.8	316 SS	C P
0.120	3.05	60194S	0.560	14.30	0.100	2.54	1.080	0.19	0.238	6.05	0.258	1.15	0.118	3.00	0.010	0.25	10.8	316 SS	C P
0.120	3.05	60195S	0.630	15.88	0.100	2.54	1.000	0.18	0.258	6.55	0.258	1.15	0.128	3.25	0.010	0.25	11.8	316 SS	C P
0.120	3.05	60196S	0.750	19.05	0.100	2.54	0.830	0.15	0.310	7.87	0.258	1.15	0.149	3.78	0.010	0.25	13.9	316 SS	C P
0.120	3.05	60197S	0.880	22.23	0.100	2.54	0.670	0.12	0.387	9.83	0.258	1.15	0.169	4.29	0.010	0.25	15.9	316 SS	C P
0.120	3.05	60198S	1.000	25.40	0.100	2.54	0.580	0.10	0.443	11.25	0.258	1.15	0.189	4.80	0.010	0.25	17.9	316 SS	C P
0.120	3.05	60199S	1.130	28.58	0.100	2.54	0.540	0.10	0.477	12.12	0.258	1.15	0.209	5.31	0.010	0.25	19.9	316 SS	C P
0.120	3.05	60200S	1.250	31.75	0.100	2.54	0.480	0.09	0.534	13.56	0.258	1.15	0.231	5.87	0.010	0.25	22.1	316 SS	C P
0.120	3.05	60201S	1.500	38.10	0.100	2.54	0.400	0.07	0.646	16.41	0.258	1.15	0.273	6.93	0.010	0.25	26.3	316 SS	C P
0.120	3.05	60202S	0.250	6.35	0.098	2.49	4.000	0.70	0.090	2.29	0.360	1.60	0.074	1.88	0.011	0.28	5.7	316 SS	C P
0.120	3.05	60203S	0.310	7.95	0.098	2.49	3.080	0.54	0.117	2.97	0.360	1.60	0.086	2.18	0.011	0.28	6.8	316 SS	C P
0.120	3.05	60204S	0.380	9.53	0.098	2.49	2.500	0.44	0.144	3.66	0.360	1.60	0.097	2.46	0.011	0.28	7.8	316 SS	C P
0.120	3.05	60205S	0.440	11.13	0.098	2.49	2.170	0.38	0.166	4.22	0.360	1.60	0.109	2.77	0.011	0.28	8.9	316 SS	C P
0.120	3.05	60206S	0.500	12.70	0.098	2.49	1.830	0.32	0.196	4.98	0.360	1.60	0.120	3.05	0.011	0.28	9.9	316 SS	C P
0.120	3.05	60207S	0.560	14.30	0.098	2.49	1.670	0.29	0.216	5.49	0.360	1.60	0.132	3.35	0.011	0.28	11	316 SS	C P
0.120	3.05	60208S	0.630	15.88	0.098	2.49	1.500	0.26	0.240	6.10	0.360	1.60	0.143	3.63	0.011	0.28	12	316 SS	C P
0.120	3.05	60209S	0.750	19.05	0.098	2.49	1.170	0.20	0.309	7.85	0.360	1.60	0.167	4.24	0.011	0.28	14.2	316 SS	C P
0.120	3.05	60210S	0.880	22.23	0.098	2.49	1.000	0.18	0.360	9.14	0.360	1.60	0.190	4.83	0.011	0.28	16.3	316 SS	C P
0.120	3.05	60211S	1.000	25.40	0.098	2.49	0.920	0.16	0.393	9.98	0.360	1.60	0.213	5.41	0.011	0.28	18.4	316 SS	C P
0.120	3.05	60212S	0.250	6.35	0.096	2.44	5.420	0.95	0.081	2.06	0.440	1.96	0.084	2.13	0.012	0.30	6	316 SS	C P
0.120	3.05	60213S	0.310	7.95	0.096	2.44	4.250	0.74	0.104	2.64	0.440	1.96	0.097	2.46	0.012	0.30	7.1	316 SS	C P
0.120	3.05	60214S	0.380	9.53	0.096	2.44	3.420	0.60	0.129	3.28	0.440	1.96	0.110	2.79	0.012	0.30	8.3	316 SS	C P
0.120	3.05	60215S	0.440	11.13	0.096	2.44	2.920	0.51	0.151	3.84	0.440	1.96	0.125	3.18	0.012	0.30	9.4	316 SS	C P
0.120	3.05	60216S	0.500	12.70	0.096	2.44	2.500	0.44	0.176	4.47	0.440	1.96	0.138	3.51	0.012	0.30	10.5	316 SS	C P
0.120	3.05	60217S	0.560	14.30	0.096	2.44	2.250	0.39	0.196	4.98	0.440	1.96	0.152	3.86	0.012	0.30	11.7	316 SS	C P
0.120	3.05	60218S	0.630	15.88	0.096	2.44	2.000	0.35	0.220	5.59	0.440	1.96	0.165	4.19	0.012	0.30	12.8	316 SS	C P
0.120	3.05	60219S	0.690	17.48	0.096	2.44	1.750	0.31	0.252	6.40	0.440	1.96	0.182	4.62	0.012	0.30	14.2	316 SS	C P
0.120	3.05	60220S	0.750	19.05	0.096	2.44	1.670	0.29	0.264	6.71	0.440	1.96	0.193	4.90	0.012	0.30	15.1	316 SS	C P
0.120	3.05	60221S	0.810	20.65	0.096	2.44	1.500	0.26	0.294	7.47	0.440	1.96	0.207	5.26	0.012	0.30	16.3	316 SS	C P
0.120	3.05	60222S	0.880	22.23	0.096	2.44	1.420	0.25	0.311	7.90	0.440	1.96	0.220	5.59	0.012	0.30	17.3	316 SS	C P
0.120	3.05	60223S	0.940	23.83	0.096	2.44	1.250	0.22	0.352	8.94	0.440	1.96	0.241	6.12	0.012	0.30	19.1	316 SS	C P
0.120	3.05	60224S	1.000	25.40	0.096	2.44	1.250	0.22	0.352	8.94	0.440	1.96	0.247	6.27	0.012	0.30	19.6	316 SS	C P
0.120	3.05	60225S	1.130	28.58	0.096	2.44	1.080	0.19	0.407	10.34	0.440	1.96	0.272	6.91	0.012	0.30	21.7	316 SS	C P
0.120	3.05	60226S	1.250	31.75	0.096	2.44	1.000	0.18	0.441	11.20	0.440	1.96	0.291	7.39	0.012	0.30	23.3	316 SS	C P
0.120	3.05	60227S	1.500	38.10	0.096	2.44	0.830	0.15	0.529	13.44	0.440	1.96	0.342	8.69	0.012	0.30	27.5	316 SS	C P
0.120	3.05	60406S	0.250	6.35	0.092	2.34	9.410	1.65											




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	E n d s	F in s h						
0.120	3.05	60426S	0.440	11.13	0.088	2.24	7.910	1.39	0.138	3.51	1.090	4.85	0.185	4.70	0.016	0.41	11.6	316 SS CG P
0.120	3.05	60427S	0.500	12.70	0.088	2.24	7.080	1.24	0.154	3.91	1.090	4.85	0.205	5.21	0.016	0.41	12.8	316 SS CG P
0.120	3.05	60428S	0.560	14.30	0.088	2.24	6.250	1.09	0.174	4.42	1.090	4.85	0.225	5.72	0.016	0.41	14.1	316 SS CG P
0.120	3.05	60429S	0.630	15.88	0.088	2.24	5.420	0.95	0.201	5.11	1.090	4.85	0.249	6.32	0.016	0.41	15.6	316 SS CG P
0.120	3.05	60430S	0.690	17.48	0.088	2.24	5.000	0.88	0.218	5.54	1.090	4.85	0.273	6.93	0.016	0.41	17.1	316 SS CG P
0.120	3.05	60431S	0.750	19.05	0.088	2.24	4.170	0.73	0.262	6.66	1.090	4.85	0.305	7.75	0.016	0.41	19.1	316 SS CG P
0.120	3.05	60432S	1.000	25.40	0.088	2.24	3.330	0.58	0.327	8.31	1.090	4.85	0.375	9.53	0.016	0.41	23.4	316 SS CG P
0.120	3.05	60433S	1.130	28.58	0.088	2.24	2.920	0.51	0.374	9.50	1.090	4.85	0.442	11.23	0.016	0.41	27.6	316 SS CG P
0.120	3.05	60434S	1.250	31.75	0.088	2.24	2.670	0.47	0.409	10.39	1.090	4.85	0.478	12.14	0.016	0.41	29.9	316 SS CG P
0.120	3.05	60435S	1.500	38.10	0.088	2.24	2.250	0.39	0.484	12.29	1.090	4.85	0.560	14.22	0.016	0.41	35	316 SS CG P
0.120	3.05	60436S	0.190	4.78	0.084	2.13	34.400	6.02	0.044	1.12	1.516	6.74	0.101	2.57	0.018	0.46	5.6	316 SS CG P
0.120	3.05	60437S	0.250	6.35	0.084	2.13	23.740	4.16	0.064	1.63	1.516	6.74	0.132	3.35	0.018	0.46	7.3	316 SS CG P
0.120	3.05	60438S	0.310	7.95	0.084	2.13	18.330	3.21	0.083	2.11	1.516	6.74	0.159	4.04	0.018	0.46	8.8	316 SS CG P
0.120	3.05	60439S	0.380	9.53	0.084	2.13	14.990	2.62	0.101	2.57	1.516	6.74	0.180	4.57	0.018	0.46	10	316 SS CG P
0.120	3.05	60440S	0.440	11.13	0.084	2.13	12.910	2.26	0.117	2.97	1.516	6.74	0.208	5.28	0.018	0.46	11.6	316 SS CG P
0.120	3.05	60441S	0.500	12.70	0.084	2.13	10.830	1.90	0.140	3.56	1.516	6.74	0.245	6.22	0.018	0.46	13.6	316 SS CG P
0.120	3.05	60442S	0.560	14.30	0.084	2.13	9.580	1.68	0.158	4.01	1.516	6.74	0.271	6.88	0.018	0.46	15.1	316 SS CG P
0.120	3.05	60443S	0.630	15.88	0.084	2.13	9.160	1.60	0.165	4.19	1.516	6.74	0.289	7.34	0.018	0.46	16.1	316 SS CG P
0.120	3.05	60444S	0.690	17.48	0.084	2.13	7.910	1.39	0.192	4.88	1.516	6.74	0.325	8.26	0.018	0.46	18.1	316 SS CG P
0.120	3.05	60445S	0.750	19.05	0.084	2.13	7.080	1.24	0.214	5.44	1.516	6.74	0.351	8.92	0.018	0.46	19.5	316 SS CG P
0.120	3.05	60446S	1.000	25.40	0.084	2.13	5.330	0.93	0.284	7.21	1.516	6.74	0.455	11.56	0.018	0.46	25.3	316 SS CG P
0.120	3.05	60447S	1.130	28.58	0.084	2.13	4.670	0.82	0.325	8.26	1.516	6.74	0.510	12.95	0.018	0.46	28.3	316 SS CG P
0.120	3.05	60448S	1.250	31.75	0.084	2.13	4.170	0.73	0.364	9.25	1.516	6.74	0.577	14.66	0.018	0.46	32.1	316 SS CG P
0.120	3.05	60449S	1.500	38.10	0.084	2.13	3.420	0.60	0.444	11.28	1.516	6.74	0.697	17.70	0.018	0.46	38.7	316 SS CG P
0.120	3.05	60450S	0.250	6.35	0.080	2.03	39.570	6.92	0.051	1.30	2.032	9.04	0.150	3.81	0.020	0.51	7.5	316 SS CG P
0.120	3.05	60451S	0.310	7.95	0.080	2.03	29.990	5.25	0.068	1.73	2.032	9.04	0.185	4.70	0.020	0.51	9.3	316 SS CG P
0.120	3.05	60452S	0.380	9.53	0.080	2.03	24.160	4.23	0.084	2.13	2.032	9.04	0.215	5.46	0.020	0.51	10.8	316 SS CG P
0.120	3.05	60453S	0.440	11.13	0.080	2.03	20.410	3.57	0.100	2.54	2.032	9.04	0.250	6.35	0.020	0.51	12.5	316 SS CG P
0.120	3.05	60454S	0.500	12.70	0.080	2.03	17.910	3.13	0.113	2.87	2.032	9.04	0.280	7.11	0.020	0.51	14	316 SS CG P
0.120	3.05	60455S	0.560	14.30	0.080	2.03	15.410	2.70	0.132	3.35	2.032	9.04	0.310	7.87	0.020	0.51	15.5	316 SS CG P
0.120	3.05	60456S	0.630	15.88	0.080	2.03	13.750	2.41	0.148	3.76	2.032	9.04	0.345	8.76	0.020	0.51	17.3	316 SS CG P
0.120	3.05	60457S	0.690	17.48	0.080	2.03	12.500	2.19	0.163	4.14	2.032	9.04	0.375	9.53	0.020	0.51	18.8	316 SS CG P
0.120	3.05	60458S	0.750	19.05	0.080	2.03	11.250	1.97	0.181	4.60	2.032	9.04	0.410	10.41	0.020	0.51	20.5	316 SS CG P
0.120	3.05	60459S	0.810	20.65	0.080	2.03	10.410	1.82	0.195	4.95	2.032	9.04	0.430	10.92	0.020	0.51	21.5	316 SS CG P
0.120	3.05	60460S	0.940	23.83	0.080	2.03	9.000	1.57	0.226	5.74	2.032	9.04	0.510	12.95	0.020	0.51	25.5	316 SS CG P
0.120	3.05	60461S	1.000	25.40	0.080	2.03	8.330	1.46	0.244	6.20	2.032	9.04	0.540	13.72	0.020	0.51	27	316 SS CG P
0.120	3.05	60462S	1.130	28.58	0.080	2.03	7.500	1.31	0.271	6.88	2.032	9.04	0.600	15.24	0.020	0.51	30	316 SS CG P
0.120	3.05	60463S	1.250	31.75	0.080	2.03	6.660	1.17	0.305	7.75	2.032	9.04	0.660	16.76	0.020	0.51	33	316 SS CG P
0.120	3.05	60464S	1.500	38.10	0.080	2.03	5.420	0.95	0.375	9.53	2.032	9.04	0.790	20.07	0.020	0.51	39.5	316 SS CG P
0.120	3.05	60465S	0.250	6.35	0.076	1.93	58.310	10.20	0.045	1.14	2.644	11.76	0.166	4.22	0.022	0.56	7.5	316 SS CG P
0.120	3.05	60466S	0.310	7.95	0.076	1.93	44.980	7.87	0.059	1.50	2.644	11.76	0.199	5.05	0.022	0.56	9	316 SS CG P
0.120	3.05	60467S	0.380	9.53	0.076	1.93	34.990	6.12	0.076	1.93	2.644	11.76	0.243	6.17	0.022	0.56	11	316 SS CG P
0.120	3.05	60468S	0.440	11.13	0.076	1.93	29.990	5.25	0.088	2.24	2.644	11.76	0.276	7.01	0.022	0.56	12.5	316 SS CG P
0.120	3.05	60469S	0.500	12.70	0.076	1.93	25.820	4.52	0.102	2.59	2.644	11.76	0.309	7.85	0.022	0.56	14	316 SS CG P
0.120	3.05	60470S	0.560	14.30	0.076	1.93	23.320	4.08	0.113	2.87	2.644	11.76	0.342	8.69	0.022	0.56	15.5	316 SS CG P
0.120	3.05	60471S	0.630	15.88	0.076	1.93	20.830	3.64	0.127	3.23	2.644	11.76	0.374	9.50	0.022	0.56	17	316 SS CG P
0.120	3.05	60472S	0.690	17.48	0.076	1.93	18.330	3.21	0.144	3.66	2.644	11.76	0.419	10.64	0.022	0.56	19	316 SS CG P
0.120	3.05	60473S	0.750	19.05	0.076	1.93	16.660	2.92	0.159	4.04	2.644	11.76	0.451	11.46	0.022	0.56	20.5	316 SS CG P
0.120	3.05	60474S	0.810	20.65	0.076	1.93	14.990	2.62	0.176	4.47	2.644	11.76	0.510	12.95	0.022	0.56	23.2	316 SS CG P
0.120	3.05	60475S	0.940	23.83	0.076	1.93	13.330	2.33	0.198	5.03	2.644	11.76	0.555	14.10	0.022	0.56	25.2	316 SS CG P
0.120	3.05	60476S	1.000	25.40	0.076	1.93	12.500	2.19	0.212	5.39	2.644	11.76	0.600	15.24	0.022	0.56	27.3	316 SS CG P
0.120	3.05	60477S	1.130	28.58	0.076	1.93	10.830	1.90	0.244	6.20	2.644	11.76	0.665	16.89	0.022	0.56	30.2	316 SS CG P
0.120	3.05	60478S	1.250	31.75	0.076	1.93	9.790	1.71	0.270	6.86	2.644	11.76	0.758	19.25	0.022	0.56	34.5	316 SS CG P
0.120	3.05	60479S	1.500	38.10	0.076	1.93	8.080	1.41	0.327	8.31	2.644	11.76	0.902	22.91	0.022	0.56	41	316 SS CG P
0.120	3.05	60480S	0.250	6.35	0.072	1.83	89.460	15.66	0.037	0.94	3.354	14.92	0.179	4.55	0.024	0.61	7.5	316 SS CG P
0.120	3.05	60481S	0.310	7.95	0.072	1.83	68.470	11.98	0.049	1.25	3.354	14.92	0.219	5.56	0.024	0.61	9.1	316 SS CG P
0.120	3.05	60482S	0.380	9.53	0													




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends F nsh								
0.120	3.05	60977S	0.500	12.70	0.084	2.13	10.800	1.89	0.137	3.49	1.480	6.58	0.245	6.22	0.018	0.46	13.5	316 SS	CG P
0.120	3.05	60978S	0.560	14.30	0.084	2.13	9.600	1.68	0.154	3.92	1.478	6.57	0.271	6.88	0.018	0.46	14.9	316 SS	CG P
0.120	3.05	60979S	0.630	15.88	0.084	2.13	9.200	1.61	0.161	4.09	1.481	6.58	0.289	7.34	0.018	0.46	15.4	316 SS	CG P
0.120	3.05	60980S	0.690	17.48	0.084	2.13	7.900	1.38	0.188	4.76	1.485	6.60	0.325	8.26	0.018	0.46	17.7	316 SS	CG P
0.120	3.05	60981S	0.750	19.05	0.084	2.13	7.100	1.24	0.209	5.30	1.484	6.60	0.351	8.92	0.018	0.46	19.4	316 SS	CG P
0.120	3.05	60982S	1.000	25.40	0.084	2.13	5.300	0.93	0.280	7.10	1.484	6.60	0.455	11.56	0.018	0.46	25.3	316 SS	CG P
0.120	3.05	60983S	1.130	28.58	0.084	2.13	4.700	0.82	0.316	8.01	1.485	6.60	0.510	12.95	0.018	0.46	28.3	316 SS	CG P
0.120	3.05	60984S	1.250	31.75	0.084	2.13	4.200	0.74	0.353	8.95	1.483	6.59	0.577	14.66	0.018	0.46	31.4	316 SS	CG P
0.120	3.05	60985S	1.500	38.10	0.084	2.13	3.400	0.60	0.436	11.08	1.482	6.59	0.677	17.20	0.018	0.46	38.4	316 SS	CG P
0.120	3.05	61091S	0.250	6.35	0.080	2.03	39.600	6.94	0.050	1.28	1.980	8.80	0.150	3.81	0.020	0.51	7.1	316 SS	CG P
0.120	3.05	61092S	0.310	7.95	0.080	2.03	30.000	5.25	0.067	1.69	2.010	8.93	0.185	4.70	0.020	0.51	8.7	316 SS	CG P
0.120	3.05	61093S	0.380	9.53	0.080	2.03	24.200	4.24	0.082	2.09	1.984	8.82	0.215	5.46	0.020	0.51	10.3	316 SS	CG P
0.120	3.05	61094S	0.440	11.13	0.080	2.03	20.400	3.57	0.098	2.48	1.999	8.88	0.250	6.35	0.020	0.51	11.8	316 SS	CG P
0.120	3.05	61095S	0.500	12.70	0.080	2.03	17.900	3.14	0.112	2.83	2.005	8.91	0.280	7.11	0.020	0.51	13.2	316 SS	CG P
0.120	3.05	61096S	0.560	14.30	0.080	2.03	15.400	2.70	0.130	3.29	2.002	8.90	0.310	7.87	0.020	0.51	15	316 SS	CG P
0.120	3.05	61097S	0.630	15.88	0.080	2.03	13.700	2.40	0.146	3.70	2.000	8.89	0.345	8.76	0.020	0.51	16.6	316 SS	CG P
0.120	3.05	61098S	0.690	17.48	0.080	2.03	12.500	2.19	0.160	4.05	2.000	8.89	0.375	9.53	0.020	0.51	18	316 SS	CG P
0.120	3.05	61099S	0.750	19.05	0.080	2.03	11.200	1.96	0.178	4.53	1.994	8.86	0.410	10.41	0.020	0.51	19.9	316 SS	CG P
0.120	3.05	61100S	0.810	20.65	0.080	2.03	10.400	1.82	0.192	4.87	1.997	8.88	0.430	10.92	0.020	0.51	21.2	316 SS	CG P
0.120	3.05	61101S	0.940	23.83	0.080	2.03	9.000	1.58	0.222	5.63	1.998	8.88	0.510	12.95	0.020	0.51	24.2	316 SS	CG P
0.120	3.05	61102S	1.000	25.40	0.080	2.03	8.300	1.45	0.240	6.10	1.992	8.85	0.540	13.72	0.020	0.51	26.1	316 SS	CG P
0.120	3.05	61103S	1.130	28.58	0.080	2.03	7.500	1.31	0.266	6.76	1.995	8.87	0.600	15.24	0.020	0.51	28.7	316 SS	CG P
0.120	3.05	61104S	1.250	31.75	0.080	2.03	6.700	1.17	0.298	7.56	1.997	8.88	0.660	16.76	0.020	0.51	31.9	316 SS	CG P
0.120	3.05	61105S	1.500	38.10	0.080	2.03	5.400	0.95	0.370	9.38	1.998	8.88	0.790	20.07	0.020	0.51	39	316 SS	CG P
0.120	3.05	61212S	0.250	6.35	0.076	1.93	58.300	10.21	0.045	1.14	2.624	11.66	0.166	4.22	0.022	0.56	7.3	316 SS	CG P
0.120	3.05	61213S	0.310	7.95	0.076	1.93	45.000	7.88	0.058	1.47	2.610	11.60	0.199	5.05	0.022	0.56	8.9	316 SS	CG P
0.120	3.05	61214S	0.380	9.53	0.076	1.93	35.000	6.13	0.075	1.89	2.625	11.67	0.243	6.17	0.022	0.56	10.9	316 SS	CG P
0.120	3.05	61215S	0.440	11.13	0.076	1.93	30.000	5.25	0.087	2.21	2.610	11.60	0.276	7.01	0.022	0.56	12.4	316 SS	CG P
0.120	3.05	61216S	0.500	12.70	0.076	1.93	25.800	4.52	0.101	2.57	2.606	11.58	0.309	7.85	0.022	0.56	14.1	316 SS	CG P
0.120	3.05	61217S	0.560	14.30	0.076	1.93	23.300	4.08	0.112	2.84	2.610	11.60	0.342	8.69	0.022	0.56	15.4	316 SS	CG P
0.120	3.05	61218S	0.630	15.88	0.076	1.93	20.800	3.64	0.125	3.18	2.600	11.56	0.374	9.50	0.022	0.56	17	316 SS	CG P
0.120	3.05	61219S	0.690	17.48	0.076	1.93	18.300	3.21	0.143	3.62	2.617	11.63	0.419	10.64	0.022	0.56	19	316 SS	CG P
0.120	3.05	61220S	0.750	19.05	0.076	1.93	16.700	2.93	0.156	3.96	2.605	11.58	0.451	11.46	0.022	0.56	20.6	316 SS	CG P
0.120	3.05	61221S	0.810	20.65	0.076	1.93	15.000	2.63	0.174	4.41	2.610	11.60	0.495	12.57	0.022	0.56	22.7	316 SS	CG P
0.120	3.05	61222S	0.940	23.83	0.076	1.93	13.300	2.33	0.196	4.98	2.607	11.59	0.555	14.10	0.022	0.56	25.4	316 SS	CG P
0.120	3.05	61223S	1.000	25.40	0.076	1.93	12.500	2.19	0.209	5.30	2.613	11.61	0.600	15.24	0.022	0.56	26.9	316 SS	CG P
0.120	3.05	61224S	1.130	28.58	0.076	1.93	10.800	1.89	0.241	6.13	2.603	11.57	0.665	16.89	0.022	0.56	30.8	316 SS	CG P
0.120	3.05	61225S	1.250	31.75	0.076	1.93	9.800	1.72	0.266	6.76	2.607	11.59	0.758	19.25	0.022	0.56	33.8	316 SS	CG P
0.120	3.05	61226S	1.500	38.10	0.076	1.93	8.100	1.42	0.322	8.17	2.608	11.59	0.902	22.91	0.022	0.56	40.4	316 SS	CG P
0.120	3.05	61362S	0.250	6.35	0.072	1.83	89.500	15.67	0.037	0.94	3.312	14.72	0.179	4.55	0.024	0.61	7.2	316 SS	CG P
0.120	3.05	61363S	0.310	7.95	0.072	1.83	68.500	12.00	0.048	1.23	3.288	14.61	0.219	5.56	0.024	0.61	8.8	316 SS	CG P
0.120	3.05	61364S	0.380	9.53	0.072	1.83	55.300	9.69	0.060	1.52	3.318	14.75	0.259	6.58	0.024	0.61	10.5	316 SS	CG P
0.120	3.05	61365S	0.440	11.13	0.072	1.83	46.300	8.11	0.072	1.82	3.334	14.82	0.299	7.59	0.024	0.61	12.1	316 SS	CG P
0.120	3.05	61366S	0.500	12.70	0.072	1.83	40.000	7.01	0.083	2.11	3.320	14.76	0.339	8.61	0.024	0.61	13.7	316 SS	CG P
0.120	3.05	61367S	0.560	14.30	0.072	1.83	35.200	6.17	0.094	2.40	3.309	14.71	0.379	9.63	0.024	0.61	15.3	316 SS	CG P
0.120	3.05	61368S	0.630	15.88	0.072	1.83	31.300	5.48	0.106	2.69	3.318	14.75	0.419	10.64	0.024	0.61	17	316 SS	CG P
0.120	3.05	61369S	0.690	17.48	0.072	1.83	28.300	4.96	0.117	2.98	3.311	14.72	0.459	11.66	0.024	0.61	18.6	316 SS	CG P
0.120	3.05	61370S	0.750	19.05	0.072	1.83	25.700	4.50	0.129	3.28	3.315	14.73	0.499	12.67	0.024	0.61	20.2	316 SS	CG P
0.120	3.05	61371S	0.810	20.65	0.072	1.83	23.600	4.13	0.141	3.57	3.328	14.79	0.539	13.69	0.024	0.61	21.9	316 SS	CG P
0.120	3.05	61372S	0.880	22.23	0.072	1.83	21.800	3.82	0.152	3.87	3.314	14.73	0.580	14.73	0.024	0.61	23.5	316 SS	CG P
0.120	3.05	61373S	0.940	23.83	0.072	1.83	20.300	3.56	0.164	4.15	3.329	14.80	0.619	15.72	0.024	0.61	25.1	316 SS	CG P
0.120	3.05	61374S	1.000	25.40	0.072	1.83	19.000	3.33	0.175	4.44	3.325	14.78	0.659	16.74	0.024	0.61	26.7	316 SS	CG P
0.120	3.05	61375S	1.130	28.58	0.072	1.83	16.800	2.94	0.198	5.02	3.326	14.78	0.740	18.80	0.024	0.61	29.9	316 SS	CG P
0.120	3.05	61376S	1.250	31.75	0.072	1.83	15.000	2.63	0.221	5.62	3.315	14.73	0.820	20.83	0.024	0.61	33.3	316 SS	CG P
0.120	3.05	61377S	1.500	38.10	0.072	1.83	12.500	2.19	0.266	6.75</td									




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm		Wire Dia. Inches mm		Total Coils	E M at'l	F n s h		
0.125	3.18	66155S	0.310	7.87	0.101	2.57	1.996	0.35	0.166	4.22	0.331	1.47	0.144	3.66	0.012	0.31	11	316 SS C P
0.125	3.18	66156S	0.310	7.87	0.091	2.31	12.278	2.15	0.097	2.46	1.191	5.30	0.166	4.22	0.017	0.43	8.8	316 SS C P
0.125	3.18	66157S	0.310	7.87	0.081	2.06	42.875	7.50	0.058	1.47	2.487	11.06	0.204	5.18	0.022	0.56	8.3	316 SS C P
0.125	3.18	66158S	0.310	7.87	0.083	2.11	36.019	6.30	0.061	1.55	2.197	9.77	0.189	4.80	0.021	0.53	8	316 SS C P
0.125	3.18	66159S	0.310	7.87	0.095	2.41	7.314	1.28	0.115	2.92	0.841	3.74	0.143	3.63	0.015	0.38	8.5	316 SS C P
0.125	3.18	66160S	0.310	7.87	0.077	1.96	80.505	14.09	0.040	1.02	3.220	14.32	0.192	4.88	0.024	0.61	7	316 SS C P
0.125	3.18	66161S	0.310	7.87	0.091	2.31	9.209	1.61	0.106	2.69	0.976	4.34	0.204	5.18	0.017	0.43	11	316 SS C P
0.125	3.18	66162S	0.340	8.64	0.101	2.57	3.370	0.59	0.130	3.30	0.438	1.95	0.100	2.54	0.012	0.31	7.3	316 SS C P
0.125	3.18	66164S	0.340	8.64	0.101	2.57	2.395	0.42	0.182	4.62	0.436	1.94	0.126	3.20	0.012	0.31	9.5	316 SS C P
0.125	3.18	66165S	0.340	8.64	0.083	2.11	39.294	6.88	0.056	1.42	2.200	9.79	0.179	4.55	0.021	0.53	7.5	316 SS C P
0.125	3.18	66166S	0.340	8.64	0.093	2.36	10.543	1.85	0.094	2.39	0.991	4.41	0.144	3.66	0.016	0.41	8	316 SS C P
0.125	3.18	66167S	0.340	8.64	0.095	2.41	4.754	0.83	0.160	4.06	0.761	3.39	0.180	4.57	0.015	0.38	12	316 SS CG P
0.125	3.18	66168S	0.380	9.65	0.077	1.96	48.497	8.49	0.066	1.68	3.201	14.24	0.247	6.27	0.024	0.61	10.3	316 SS CG P
0.125	3.18	66169S	0.380	9.65	0.077	1.96	57.503	10.06	0.056	1.42	3.220	14.32	0.240	6.10	0.024	0.61	9	316 SS C P
0.125	3.18	66170S	0.380	9.65	0.081	2.06	29.775	5.21	0.084	2.13	2.501	11.12	0.242	6.15	0.022	0.56	11	316 SS CG P
0.125	3.18	66171S	0.380	9.65	0.089	2.26	11.902	2.08	0.118	3.00	1.404	6.25	0.216	5.49	0.018	0.46	11	316 SS C P
0.125	3.18	66173S	0.380	9.65	0.093	2.36	9.037	1.58	0.110	2.79	0.994	4.42	0.160	4.06	0.016	0.41	9	316 SS C P
0.125	3.18	66174S	0.380	9.65	0.091	2.31	11.050	1.93	0.108	2.74	1.193	5.31	0.179	4.55	0.017	0.43	9.5	316 SS C P
0.125	3.18	66175S	0.380	9.65	0.085	2.16	14.397	2.52	0.080	2.03	1.152	5.12	0.300	7.62	0.020	0.51	14	316 SS C P
0.125	3.18	66176S	0.380	9.65	0.095	2.41	5.943	1.04	0.142	3.61	0.844	3.75	0.150	3.81	0.015	0.38	10	316 SS CG P
0.125	3.18	66177S	0.380	9.65	0.085	2.16	28.795	5.04	0.066	1.68	1.900	8.45	0.180	4.57	0.020	0.51	8	316 SS C P
0.125	3.18	66178S	0.410	10.41	0.089	2.26	11.902	2.08	0.118	3.00	1.404	6.25	0.216	5.49	0.018	0.46	11	316 SS CG P
0.125	3.18	66179S	0.410	10.41	0.089	2.26	11.902	2.08	0.118	3.00	1.404	6.25	0.198	5.03	0.018	0.46	11	316 SS CG P
0.125	3.18	66180S	0.410	10.41	0.089	2.26	13.389	2.34	0.105	2.67	1.406	6.25	0.198	5.03	0.018	0.46	10	316 SS C P
0.125	3.18	66181S	0.410	10.41	0.091	2.31	9.209	1.61	0.129	3.28	1.188	5.28	0.204	5.18	0.017	0.43	11	316 SS C P
0.125	3.18	66182S	0.410	10.41	0.095	2.41	6.792	1.19	0.124	3.15	0.842	3.75	0.150	3.81	0.015	0.38	9	316 SS C P
0.125	3.18	66183S	0.440	11.18	0.077	1.96	39.080	6.84	0.082	2.08	3.205	14.26	0.295	7.49	0.024	0.61	12.3	316 SS CG P
0.125	3.18	66184S	0.440	11.18	0.089	2.26	10.930	1.91	0.128	3.25	1.399	6.22	0.230	5.84	0.018	0.46	11.8	316 SS C P
0.125	3.18	66185S	0.440	11.18	0.095	2.41	3.657	0.64	0.200	5.08	0.731	3.25	0.240	6.10	0.015	0.38	15	316 SS C P
0.125	3.18	66186S	0.470	11.94	0.105	2.67	1.096	0.19	0.237	6.02	0.260	1.16	0.105	2.67	0.010	0.25	9.5	316 SS C P
0.125	3.18	66187S	0.470	11.94	0.093	2.36	6.659	1.17	0.149	3.79	0.992	4.41	0.200	5.08	0.016	0.41	11.5	316 SS C P
0.125	3.18	66188S	0.470	11.94	0.077	1.96	41.074	7.19	0.078	1.98	3.204	14.25	0.307	7.80	0.024	0.61	11.8	316 SS C P
0.125	3.18	66189S	0.500	12.70	0.105	2.67	0.433	0.08	0.280	7.11	0.121	0.54	0.220	5.59	0.010	0.25	21	316 SS C P
0.125	3.18	66190S	0.500	12.70	0.105	2.67	0.967	0.17	0.269	6.83	0.260	1.16	0.115	2.92	0.010	0.25	10.5	316 SS C P
0.125	3.18	66191S	0.500	12.70	0.093	2.36	6.802	1.19	0.146	3.71	0.993	4.42	0.197	5.00	0.016	0.41	11.3	316 SS C P
0.125	3.18	66192S	0.500	12.70	0.101	2.57	1.932	0.34	0.226	5.74	0.437	1.94	0.148	3.76	0.012	0.31	11.3	316 SS C P
0.125	3.18	66193S	0.500	12.70	0.099	2.52	2.593	0.45	0.213	5.41	0.552	2.46	0.166	4.22	0.013	0.33	11.8	316 SS C P
0.125	3.18	66194S	0.500	12.70	0.093	2.36	6.141	1.08	0.162	4.12	0.995	4.43	0.213	5.41	0.016	0.41	12.3	316 SS C P
0.125	3.18	66195S	0.500	12.70	0.089	2.26	9.314	1.63	0.150	3.81	1.397	6.21	0.261	6.63	0.018	0.46	13.5	316 SS C P
0.125	3.18	66196S	0.500	12.70	0.085	2.16	15.706	2.75	0.121	3.07	1.900	8.45	0.280	7.11	0.020	0.51	13	316 SS C P
0.125	3.18	66197S	0.500	12.70	0.081	2.06	23.714	4.15	0.106	2.69	2.514	11.18	0.315	8.00	0.022	0.56	13.3	316 SS C P
0.125	3.18	66198S	0.500	12.70	0.105	2.67	1.134	0.20	0.229	5.82	0.260	1.16	0.103	2.62	0.010	0.25	9.3	316 SS C P
0.125	3.18	66199S	0.500	12.70	0.081	2.06	22.331	3.91	0.112	2.85	2.501	11.12	0.308	7.82	0.022	0.56	14	316 SS CG P
0.125	3.18	66200S	0.500	12.70	0.093	2.36	6.025	1.05	0.165	4.19	0.994	4.42	0.200	5.08	0.016	0.41	12.5	316 SS CG P
0.125	3.18	66201S	0.500	12.70	0.089	2.26	12.172	2.13	0.115	2.92	1.400	6.23	0.212	5.39	0.018	0.46	10.8	316 SS C P
0.125	3.18	66202S	0.500	12.70	0.093	2.36	6.326	1.11	0.157	3.99	0.993	4.42	0.208	5.28	0.016	0.41	12	316 SS C P
0.125	3.18	66203S	0.500	12.70	0.105	2.67	0.283	0.05	0.180	4.57	0.051	0.23	0.320	8.13	0.010	0.25	31	316 SS C P
0.125	3.18	66204S	0.500	12.70	0.097	2.46	3.192	0.56	0.215	5.46	0.686	3.05	0.196	4.98	0.014	0.36	13	316 SS C P
0.125	3.18	66205S	0.530	13.46	0.109	2.77	0.183	0.03	0.366	9.30	0.067	0.30	0.164	4.17	0.008	0.20	19.5	316 SS C P
0.125	3.18	66206S	0.530	13.46	0.105	2.67	0.967	0.17	0.269	6.83	0.260	1.16	0.115	2.92	0.010	0.25	10.5	316 SS C P
0.125	3.18	66207S	0.530	13.46	0.095	2.41	3.657	0.64	0.230	5.84	0.841	3.74	0.240	6.10	0.015	0.38	15	316 SS C P
0.125	3.18	66208S	0.530	13.46	0.089	2.26	8.240	1.44	0.170	4.32	1.401	6.23	0.270	6.86	0.018	0.46	15	316 SS CG P
0.125	3.18	66209S	0.530	13.46	0.089	2.26	9.738	1.70	0.144	3.66	1.402	6.24	0.252	6.40	0.018	0.46	13	316 SS C P
0.125	3.18	66210S	0.560	14.22	0.097	2.46	2.976	0.52	0.231	5.87	0.687	3.06	0.207	5.26	0.014	0.36	13.8	316 SS C P
0.125	3.18	66211S	0.560	14.22	0.091	2.31	6.375	1.12	0.187	4.75	1.192	5.30	0.272	6.91	0.017	0.43	15	316 SS C P
0.125	3.18	66212S	0.560	14.22	0.083	2.11	13.259	2.32	0.165	4.19	2.188	9.73	0.384	9.75	0.021	0.53	18.3	316 SS CG P
0.125	3.18	66215S	0.63															




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg Max. Defl. Inches	Sugg Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish								
0.125	3.18	66235S	0.750	19.05	0.089	2.26	6.121	1.07	0.229	5.82	1.402	6.24	0.369	9.37	0.018	0.46	19.5	316 SS	C	P
0.125	3.18	66236S	0.750	19.05	0.101	2.57	1.403	0.25	0.311	7.90	0.436	1.94	0.190	4.83	0.012	0.31	14.8	316 SS	C	P
0.125	3.18	66237S	0.750	19.05	0.085	2.16	10.163	1.78	0.188	4.78	1.911	8.50	0.400	10.16	0.020	0.51	19	316 SS	C	P
0.125	3.18	66238S	0.750	19.05	0.085	2.16	9.598	1.68	0.199	5.06	1.910	8.50	0.420	10.67	0.020	0.51	20	316 SS	C	P
0.125	3.18	66239S	0.780	19.81	0.101	2.57	1.089	0.19	0.401	10.19	0.437	1.94	0.234	5.94	0.012	0.31	18.5	316 SS	C	P
0.125	3.18	66240S	0.780	19.81	0.077	1.96	20.126	3.52	0.159	4.04	3.200	14.23	0.528	13.41	0.024	0.61	22	316 SS	CG	P
0.125	3.18	66241S	0.810	20.57	0.105	2.67	0.727	0.13	0.358	9.09	0.260	1.16	0.143	3.63	0.010	0.25	13.3	316 SS	C	P
0.125	3.18	66242S	0.810	20.57	0.095	2.41	4.322	0.76	0.195	4.95	0.843	3.75	0.210	5.33	0.015	0.38	13	316 SS	C	P
0.125	3.18	66243S	0.840	21.34	0.091	2.31	7.207	1.26	0.165	4.19	1.189	5.29	0.247	6.27	0.017	0.43	13.5	316 SS	C	P
0.125	3.18	66244S	0.880	22.35	0.105	2.67	0.258	0.05	0.532	13.51	0.137	0.61	0.348	8.84	0.010	0.25	33.8	316 SS	C	P
0.125	3.18	66245S	0.910	23.11	0.091	2.31	4.736	0.83	0.251	6.38	1.189	5.29	0.349	8.87	0.017	0.43	19.5	316 SS	C	P
0.125	3.18	66246S	0.910	23.11	0.085	2.16	9.093	1.59	0.210	5.33	1.910	8.50	0.440	11.18	0.020	0.51	21	316 SS	C	P
0.125	3.18	66247S	0.910	23.11	0.085	2.16	8.428	1.48	0.226	5.74	1.905	8.47	0.470	11.94	0.020	0.51	22.5	316 SS	C	P
0.125	3.18	66248S	0.940	23.88	0.085	2.16	7.512	1.32	0.254	6.45	1.908	8.49	0.520	13.21	0.020	0.51	25	316 SS	C	P
0.125	3.18	66249S	1.000	25.40	0.105	2.67	0.575	0.10	0.452	11.48	0.260	1.16	0.173	4.39	0.010	0.25	16.3	316 SS	C	P
0.125	3.18	66250S	1.000	25.40	0.097	2.46	1.919	0.34	0.358	9.09	0.687	3.06	0.298	7.57	0.014	0.36	20.3	316 SS	C	P
0.125	3.18	66251S	1.000	25.40	0.103	2.62	0.835	0.15	0.405	10.29	0.338	1.50	0.196	4.98	0.011	0.28	16.8	316 SS	C	P
0.125	3.18	66252S	1.000	25.40	0.093	2.36	3.086	0.54	0.322	8.18	0.994	4.42	0.376	9.55	0.016	0.41	22.5	316 SS	C	P
0.125	3.18	66253S	1.000	25.40	0.097	2.46	1.633	0.29	0.421	10.69	0.687	3.06	0.343	8.71	0.014	0.36	23.5	316 SS	C	P
0.125	3.18	66254S	1.000	25.40	0.095	2.41	2.641	0.46	0.318	8.08	0.840	3.74	0.315	8.00	0.015	0.38	20	316 SS	C	P
0.125	3.18	66255S	1.000	25.40	0.095	2.41	1.829	0.32	0.460	11.68	0.841	3.74	0.435	11.05	0.015	0.38	28	316 SS	C	P
0.125	3.18	66256S	1.000	25.40	0.095	2.41	2.972	0.52	0.283	7.19	0.841	3.74	0.285	7.24	0.015	0.38	18	316 SS	C	P
0.125	3.18	66257S	1.090	27.69	0.097	2.46	1.848	0.32	0.372	9.45	0.687	3.06	0.308	7.82	0.014	0.36	21	316 SS	C	P
0.125	3.18	66258S	1.090	27.69	0.083	2.11	7.204	1.26	0.304	7.72	2.190	9.74	0.693	17.60	0.021	0.53	32	316 SS	C	P
0.125	3.18	66259S	1.130	28.70	0.081	2.06	16.241	2.84	0.154	3.91	2.501	11.12	0.429	10.90	0.022	0.56	18.5	316 SS	C	P
0.125	3.18	66260S	1.130	28.70	0.085	2.16	8.511	1.49	0.224	5.69	1.906	8.48	0.466	11.84	0.020	0.51	22.3	316 SS	C	P
0.125	3.18	66261S	1.130	28.70	0.099	2.52	0.812	0.14	0.681	17.30	0.553	2.46	0.446	11.33	0.013	0.33	33.3	316 SS	C	P
0.125	3.18	66262S	1.220	30.99	0.099	2.52	0.876	0.15	0.631	16.03	0.553	2.46	0.416	10.57	0.013	0.33	31	316 SS	C	P
0.125	3.18	66263S	1.380	35.05	0.093	2.36	2.041	0.36	0.488	12.40	0.996	4.43	0.544	13.82	0.016	0.41	33	316 SS	C	P
0.125	3.18	66264S	1.380	35.05	0.097	2.46	1.377	0.24	0.499	12.68	0.687	3.06	0.399	10.14	0.014	0.36	27.5	316 SS	C	P
0.125	3.18	66265S	1.380	35.05	0.085	2.16	6.911	1.21	0.276	7.01	1.907	8.48	0.560	14.22	0.020	0.51	27	316 SS	C	P
0.125	3.18	66266S	1.380	35.05	0.089	2.26	4.285	0.75	0.327	8.31	1.401	6.23	0.504	12.80	0.018	0.46	27	316 SS	C	P
0.125	3.18	66267S	1.380	35.05	0.085	2.16	7.199	1.26	0.264	6.71	1.901	8.46	0.540	13.72	0.020	0.51	26	316 SS	C	P
0.125	3.18	66268S	1.530	38.86	0.095	2.41	2.717	0.48	0.310	7.87	0.842	3.75	0.308	7.82	0.015	0.38	19.5	316 SS	C	P
0.125	3.18	66269S	1.750	44.45	0.097	2.46	1.080	0.19	0.636	16.15	0.687	3.06	0.497	12.62	0.014	0.36	34.5	316 SS	C	P
0.125	3.18	66270S	2.250	57.15	0.085	2.16	4.936	0.86	0.386	9.80	1.905	8.47	0.760	19.30	0.020	0.51	37	316 SS	C	P
0.125	3.18	66213S	0.590	14.99	0.063	1.60	115.822	20.27	0.056	1.42	6.486	28.85	0.465	11.81	0.031	0.79	14	316 SS	C	P
0.125	3.18	66216S	0.630	16.00	0.069	1.75	84.183	14.73	0.059	1.50	4.967	22.09	0.364	9.25	0.028	0.71	12	316 SS	C	P
0.125	3.18	60496S	0.250	6.35	0.097	2.46	8.140	1.42	0.088	2.24	0.720	3.20	0.091	2.31	0.014	0.36	6.5	316 SS	CG	P
0.125	3.18	60497S	0.310	7.95	0.097	2.46	6.340	1.11	0.114	2.90	0.720	3.20	0.109	2.77	0.014	0.36	7.8	316 SS	CG	P
0.125	3.18	60498S	0.380	9.53	0.097	2.46	5.210	0.91	0.138	3.51	0.720	3.20	0.126	3.20	0.014	0.36	9	316 SS	CG	P
0.125	3.18	60499S	0.440	11.13	0.097	2.46	4.410	0.77	0.163	4.14	0.720	3.20	0.144	3.66	0.014	0.36	10.3	316 SS	CG	P
0.125	3.18	60500S	0.500	12.70	0.097	2.46	3.820	0.67	0.188	4.78	0.720	3.20	0.161	4.09	0.014	0.36	11.5	316 SS	CG	P
0.125	3.18	60501S	0.560	14.30	0.097	2.46	3.370	0.59	0.213	5.41	0.720	3.20	0.179	4.55	0.014	0.36	12.8	316 SS	CG	P
0.125	3.18	60501S	0.630	15.88	0.097	2.46	3.020	0.53	0.238	6.05	0.720	3.20	0.196	4.98	0.014	0.36	14	316 SS	CG	P
0.125	3.18	60503S	0.690	17.48	0.097	2.46	2.740	0.48	0.263	6.68	0.720	3.20	0.214	5.44	0.014	0.36	15.3	316 SS	CG	P
0.125	3.18	60504S	0.750	19.05	0.097	2.46	2.500	0.44	0.288	7.32	0.720	3.20	0.231	5.87	0.014	0.36	16.5	316 SS	CG	P
0.125	3.18	60505S	0.810	20.65	0.097	2.46	2.300	0.40	0.313	7.95	0.720	3.20	0.249	6.32	0.014	0.36	17.8	316 SS	CG	P
0.125	3.18	60506S	0.880	22.23	0.097	2.46	2.130	0.37	0.338	8.59	0.720	3.20	0.266	6.76	0.014	0.36	19	316 SS	CG	P
0.125	3.18	60507S	0.940	23.83	0.097	2.46	1.980	0.35	0.363	9.22	0.720	3.20	0.284	7.21	0.014	0.36	20.3	316 SS	CG	P
0.125	3.18	60508S	1.000	25.40	0.097	2.46	1.860	0.33	0.387	9.83	0.720	3.20	0.301	7.65	0.014	0.36	21.5	316 SS	CG	P
0.125	3.18	60509S	1.130	28.58	0.097	2.46	1.650	0.29	0.436	11.07	0.720	3.20	0.336	8.53	0.014	0.36	24	316 SS	CG	P
0.125	3.18	60510S	1.250	31.75	0.097	2.46	1.470	0.26	0.488	12.40	0.720	3.20	0.371	9.42	0.014	0.36	26.5	316 SS	CG	P
0.125	3.18	60511S	1.380	34.93	0.097	2.46	1.340	0.24	0.537	13.64	0.720	3.20	0.406	10.31	0.014	0.36	29	316 SS	CG	P
0.125	3.18	60512S	1.500	38.10	0.097	2.4														




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	E N D S Mat'l	F n s h							
0.125	3.18	60533S	0.690	17.48	0.089	2.26	7.780	1.36	0.188	4.78	1.460	6.49	0.292	7.42	0.018	0.46	16.2	316 SS CG P
0.125	3.18	60534S	0.750	19.05	0.089	2.26	7.110	1.24	0.205	5.21	1.460	6.49	0.316	8.03	0.018	0.46	17.6	316 SS CG P
0.125	3.18	60535S	0.810	20.65	0.089	2.26	6.530	1.14	0.224	5.69	1.460	6.49	0.341	8.66	0.018	0.46	18.9	316 SS CG P
0.125	3.18	60536S	0.940	23.83	0.089	2.26	5.620	0.98	0.260	6.60	1.460	6.49	0.390	9.91	0.018	0.46	21.7	316 SS CG P
0.125	3.18	60537S	1.000	25.40	0.089	2.26	5.270	0.92	0.277	7.04	1.460	6.49	0.414	10.52	0.018	0.46	23	316 SS CG P
0.125	3.18	60538S	1.250	31.75	0.089	2.26	4.180	0.73	0.349	8.87	1.460	6.49	0.512	13.00	0.018	0.46	28.4	316 SS CG P
0.125	3.18	60539S	1.500	38.10	0.089	2.26	3.470	0.61	0.421	10.69	1.460	6.49	0.610	15.49	0.018	0.46	33.9	316 SS CG P
0.125	3.18	60540S	0.250	6.35	0.085	2.16	39.490	6.91	0.050	1.27	1.959	8.71	0.131	3.33	0.020	0.51	6.6	316 SS CG P
0.125	3.18	60541S	0.310	7.95	0.085	2.16	30.380	5.32	0.064	1.63	1.959	8.71	0.158	4.01	0.020	0.51	7.9	316 SS CG P
0.125	3.18	60542S	0.380	9.53	0.085	2.16	25.800	4.52	0.076	1.93	1.959	8.71	0.185	4.70	0.020	0.51	9.3	316 SS CG P
0.125	3.18	60543S	0.500	12.70	0.085	2.16	17.880	3.13	0.110	2.79	1.959	8.71	0.240	6.10	0.020	0.51	12	316 SS CG P
0.125	3.18	60544S	0.560	14.30	0.085	2.16	15.600	2.73	0.126	3.20	1.959	8.71	0.269	6.83	0.020	0.51	13.5	316 SS CG P
0.125	3.18	60545S	0.630	15.88	0.085	2.16	13.840	2.42	0.142	3.61	1.959	8.71	0.298	7.57	0.020	0.51	14.9	316 SS CG P
0.125	3.18	60546S	0.690	17.48	0.085	2.16	12.400	2.17	0.158	4.01	1.959	8.71	0.328	8.33	0.020	0.51	16.4	316 SS CG P
0.125	3.18	60547S	0.750	19.05	0.085	2.16	11.220	1.96	0.175	4.45	1.959	8.71	0.358	9.09	0.020	0.51	17.9	316 SS CG P
0.125	3.18	60548S	0.810	20.65	0.085	2.16	10.300	1.80	0.190	4.83	1.959	8.71	0.386	9.80	0.020	0.51	19.3	316 SS CG P
0.125	3.18	60549S	0.940	23.83	0.085	2.16	8.870	1.55	0.221	5.61	1.959	8.71	0.442	11.23	0.020	0.51	22.1	316 SS CG P
0.125	3.18	60550S	1.000	25.40	0.085	2.16	8.300	1.45	0.236	5.99	1.959	8.71	0.470	11.94	0.020	0.51	23.5	316 SS CG P
0.125	3.18	60551S	1.250	31.75	0.085	2.16	6.580	1.15	0.298	7.57	1.959	8.71	0.582	14.78	0.020	0.51	29.1	316 SS CG P
0.125	3.18	60552S	1.500	38.10	0.085	2.16	5.460	0.96	0.359	9.12	1.959	8.71	0.693	17.60	0.020	0.51	34.7	316 SS CG P
0.125	3.18	60553S	0.250	6.35	0.081	2.06	57.540	10.07	0.044	1.12	2.552	11.35	0.151	3.84	0.022	0.56	6.9	316 SS CG P
0.125	3.18	60554S	0.310	7.95	0.081	2.06	44.070	7.71	0.058	1.47	2.552	11.35	0.183	4.65	0.022	0.56	8.3	316 SS CG P
0.125	3.18	60555S	0.380	9.53	0.081	2.06	35.810	6.27	0.071	1.80	2.552	11.35	0.215	5.46	0.022	0.56	9.8	316 SS CG P
0.125	3.18	60556S	0.500	12.70	0.081	2.06	25.990	4.55	0.098	2.49	2.552	11.35	0.279	7.09	0.022	0.56	12.7	316 SS CG P
0.125	3.18	60557S	0.560	14.30	0.081	2.06	22.840	4.00	0.112	2.85	2.552	11.35	0.311	7.90	0.022	0.56	14.1	316 SS CG P
0.125	3.18	60558S	0.630	15.88	0.081	2.06	20.400	3.57	0.125	3.18	2.552	11.35	0.343	8.71	0.022	0.56	15.6	316 SS CG P
0.125	3.18	60559S	0.690	17.48	0.081	2.06	18.400	3.22	0.139	3.53	2.552	11.35	0.375	9.53	0.022	0.56	17	316 SS CG P
0.125	3.18	60560S	0.810	20.65	0.081	2.06	15.410	2.70	0.166	4.22	2.552	11.35	0.439	11.15	0.022	0.56	20	316 SS CG P
0.125	3.18	60561S	0.940	23.83	0.081	2.06	13.260	2.32	0.192	4.88	2.552	11.35	0.503	12.78	0.022	0.56	22.9	316 SS CG P
0.125	3.18	60562S	1.000	25.40	0.081	2.06	12.500	2.19	0.204	5.18	2.552	11.35	0.531	13.49	0.022	0.56	24.1	316 SS CG P
0.125	3.18	60563S	1.250	31.75	0.081	2.06	9.900	1.73	0.258	6.55	2.552	11.35	0.658	16.71	0.022	0.56	29.9	316 SS CG P
0.125	3.18	60564S	1.500	38.10	0.081	2.06	8.210	1.44	0.311	7.90	2.552	11.35	0.785	19.94	0.022	0.56	35.7	316 SS CG P
0.125	3.18	60986S	0.250	6.35	0.089	2.26	23.720	4.15	0.060	1.53	1.423	6.32	0.121	3.07	0.018	0.46	6.5	316 SS CG P
0.125	3.18	60987S	0.310	7.95	0.089	2.26	18.320	3.21	0.078	1.98	1.429	6.35	0.145	3.69	0.018	0.46	7.8	316 SS CG P
0.125	3.18	60988S	0.380	9.53	0.089	2.26	14.990	2.63	0.095	2.42	1.424	6.33	0.170	4.31	0.018	0.46	9.2	316 SS CG P
0.125	3.18	60989S	0.500	12.70	0.089	2.26	10.940	1.92	0.131	3.32	1.433	6.37	0.219	5.55	0.018	0.46	11.8	316 SS CG P
0.125	3.18	60990S	0.560	14.30	0.089	2.26	9.630	1.69	0.148	3.77	1.425	6.33	0.243	6.18	0.018	0.46	13.1	316 SS CG P
0.125	3.18	60991S	0.630	15.88	0.089	2.26	8.620	1.51	0.166	4.21	1.430	6.36	0.267	6.79	0.018	0.46	14.4	316 SS CG P
0.125	3.18	60992S	0.690	17.48	0.089	2.26	7.780	1.36	0.184	4.66	1.432	6.36	0.292	7.42	0.018	0.46	15.8	316 SS CG P
0.125	3.18	60993S	0.750	19.05	0.089	2.26	7.110	1.25	0.201	5.10	1.429	6.35	0.316	8.03	0.018	0.46	17.1	316 SS CG P
0.125	3.18	60994S	0.810	20.65	0.089	2.26	6.530	1.14	0.219	5.55	1.431	6.36	0.341	8.66	0.018	0.46	18.4	316 SS CG P
0.125	3.18	60995S	0.940	23.83	0.089	2.26	5.630	0.99	0.254	6.45	1.429	6.35	0.390	9.90	0.018	0.46	21	316 SS CG P
0.125	3.18	60996S	1.000	25.40	0.089	2.26	5.270	0.92	0.271	6.89	1.427	6.34	0.414	10.52	0.018	0.46	22.3	316 SS CG P
0.125	3.18	60997S	1.250	31.75	0.089	2.26	4.180	0.73	0.342	8.68	1.430	6.36	0.512	13.00	0.018	0.46	27.6	316 SS CG P
0.125	3.18	60998S	1.500	38.10	0.089	2.26	3.470	0.61	0.412	10.47	1.428	6.35	0.610	15.49	0.018	0.46	32.9	316 SS CG P
0.125	3.18	61106S	0.250	6.35	0.085	2.16	39.500	6.92	0.049	1.24	1.935	8.60	0.131	3.33	0.020	0.51	6.4	316 SS CG P
0.125	3.18	61107S	0.310	7.95	0.085	2.16	30.380	5.32	0.063	1.61	1.914	8.51	0.158	4.02	0.020	0.51	7.7	316 SS CG P
0.125	3.18	61108S	0.380	9.53	0.085	2.16	25.800	4.52	0.075	1.90	1.935	8.60	0.185	4.70	0.020	0.51	9	316 SS CG P
0.125	3.18	61109S	0.500	12.70	0.085	2.16	17.880	3.13	0.108	2.73	1.931	8.58	0.240	6.10	0.020	0.51	11.7	316 SS CG P
0.125	3.18	61110S	0.560	14.30	0.085	2.16	15.600	2.73	0.123	3.13	1.919	8.53	0.269	6.84	0.020	0.51	13.1	316 SS CG P
0.125	3.18	61111S	0.630	15.88	0.085	2.16	13.840	2.42	0.139	3.53	1.923	8.55	0.298	7.57	0.020	0.51	14.5	316 SS CG P
0.125	3.18	61112S	0.690	17.48	0.085	2.16	12.390	2.17	0.155	3.95	1.921	8.54	0.328	8.34	0.020	0.51	15.9	316 SS CG P
0.125	3.18	61113S	0.750	19.05	0.085	2.16	11.220	1.97	0.172	4.36	1.930	8.58	0.358	9.10	0.020	0.51	17.4	316 SS CG P
0.125	3.18	61114S	0.810	20.65	0.085	2.16	10.310	1.81	0.187	4.74	1.927	8.56	0.386	9.81	0.020	0.51	18.8	316 SS CG P
0.125	3.18	61115S	0.940	23.83	0.085	2.16	8.870	1.55	0.217	5.51	1.925	8.56	0.442	11.23	0.020	0.51	21.5	316 SS CG P
0.125	3.18	61116S	1.000	25.40	0.085	2.16	8.300	1.45	0.232	5.89	1.925	8.56	0.470	11.94	0.020	0.51	22.8	316 SS CG P
0.125	3.18	61117S	1.250	31.75	0.085</td													




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends C P					
0.140	3.56	66276S	0.280	7.11	0.120	3.05	0.875	0.15	0.185	4.70	0.162	0.72	0.095	2.41	0.010	0.25	8.5	316 SS	C P
0.140	3.56	66277S	0.310	7.87	0.100	2.54	23.148	4.05	0.074	1.88	1.713	7.62	0.140	3.56	0.020	0.51	7	316 SS	CG P
0.140	3.56	66278S	0.310	7.87	0.104	2.64	12.044	2.11	0.105	2.67	1.265	5.63	0.162	4.12	0.018	0.46	8	316 SS	C P
0.140	3.56	66279S	0.380	9.65	0.116	2.95	2.247	0.39	0.174	4.42	0.391	1.74	0.102	2.59	0.012	0.31	7.5	316 SS	C P
0.140	3.56	66281S	0.380	9.65	0.114	2.90	3.486	0.61	0.143	3.63	0.498	2.22	0.104	2.64	0.013	0.33	7	316 SS	C P
0.140	3.56	66282S	0.380	9.65	0.116	2.95	1.901	0.33	0.206	5.23	0.392	1.74	0.114	2.90	0.012	0.31	8.5	316 SS	C P
0.140	3.56	66284S	0.380	9.65	0.116	2.95	2.472	0.43	0.159	4.04	0.393	1.75	0.096	2.44	0.012	0.31	7	316 SS	C P
0.140	3.56	66285S	0.380	9.65	0.110	2.79	4.985	0.87	0.152	3.86	0.758	3.37	0.143	3.63	0.015	0.38	8.5	316 SS	C P
0.140	3.56	66286S	0.410	10.41	0.104	2.64	12.044	2.11	0.105	2.67	1.265	5.63	0.144	3.66	0.018	0.46	8	316 SS	CG P
0.140	3.56	66287S	0.440	11.18	0.108	2.74	6.875	1.20	0.130	3.30	0.894	3.98	0.148	3.76	0.016	0.41	8.3	316 SS	C P
0.140	3.56	66288S	0.440	11.18	0.104	2.64	14.453	2.53	0.088	2.24	1.272	5.66	0.144	3.66	0.018	0.46	7	316 SS	C P
0.140	3.56	66289S	0.440	11.18	0.100	2.54	14.468	2.53	0.119	3.02	1.722	7.66	0.220	5.59	0.020	0.51	10	316 SS	C P
0.140	3.56	66290S	0.440	11.18	0.116	2.95	0.951	0.17	0.248	6.30	0.236	1.05	0.192	4.88	0.012	0.31	15	316 SS	C P
0.140	3.56	66291S	0.440	11.18	0.106	2.69	5.610	0.98	0.191	4.85	1.072	4.77	0.221	5.61	0.017	0.43	12	316 SS	C P
0.140	3.56	66292S	0.440	11.18	0.100	2.54	11.574	2.03	0.149	3.79	1.725	7.67	0.260	6.60	0.020	0.51	12	316 SS	C P
0.140	3.56	66293S	0.450	11.43	0.100	2.54	23.148	4.05	0.074	1.88	1.713	7.62	0.160	4.06	0.020	0.51	7	316 SS	C P
0.140	3.56	66294S	0.470	11.94	0.104	2.64	10.323	1.81	0.123	3.12	1.270	5.65	0.180	4.57	0.018	0.46	9	316 SS	C P
0.140	3.56	66295S	0.470	11.94	0.100	2.54	11.574	2.03	0.149	3.79	1.725	7.67	0.260	6.60	0.020	0.51	12	316 SS	C P
0.140	3.56	66296S	0.500	12.70	0.120	3.05	0.569	0.10	0.370	9.40	0.211	0.94	0.130	3.30	0.010	0.25	12	316 SS	C P
0.140	3.56	66297S	0.500	12.70	0.090	2.29	35.673	6.24	0.092	2.34	3.282	14.60	0.275	6.99	0.025	0.64	11	316 SS	CG P
0.140	3.56	66298S	0.530	13.46	0.124	3.15	0.278	0.05	0.432	10.97	0.120	0.53	0.088	2.24	0.008	0.20	10	316 SS	C P
0.140	3.56	66299S	0.560	14.22	0.092	2.34	29.522	5.17	0.099	2.52	2.923	13.00	0.288	7.32	0.024	0.61	11	316 SS	C P
0.140	3.56	66300S	0.580	14.73	0.100	2.54	14.468	2.53	0.119	3.02	1.722	7.66	0.220	5.59	0.020	0.51	10	316 SS	C P
0.140	3.56	66301S	0.590	14.99	0.096	2.44	16.202	2.84	0.140	3.56	2.268	10.09	0.308	7.82	0.022	0.56	13	316 SS	C P
0.140	3.56	66302S	0.590	14.99	0.120	3.05	0.284	0.05	0.360	9.14	0.102	0.45	0.230	5.84	0.010	0.25	22	316 SS	C P
0.140	3.56	66303S	0.630	16.00	0.100	2.54	11.574	2.03	0.149	3.79	1.725	7.67	0.260	6.60	0.020	0.51	12	316 SS	C P
0.140	3.56	66305S	0.660	16.76	0.110	2.79	2.492	0.44	0.304	7.72	0.758	3.37	0.225	5.72	0.015	0.38	15	316 SS	CG P
0.140	3.56	66306S	0.690	17.53	0.106	2.69	8.631	1.51	0.124	3.15	1.070	4.76	0.145	3.68	0.017	0.43	8.5	316 SS	CG P
0.140	3.56	66307S	0.690	17.53	0.100	2.54	14.468	2.53	0.119	3.02	1.722	7.66	0.220	5.59	0.020	0.51	10	316 SS	C P
0.140	3.56	66308S	0.700	17.78	0.100	2.54	14.468	2.53	0.119	3.02	1.722	7.66	0.220	5.59	0.020	0.51	10	316 SS	C P
0.140	3.56	66309S	0.720	18.29	0.092	2.34	18.324	3.21	0.158	4.01	2.895	12.88	0.420	10.67	0.024	0.61	16.5	316 SS	C P
0.140	3.56	66310S	0.750	19.05	0.120	3.05	0.438	0.08	0.532	13.51	0.233	1.04	0.160	4.06	0.010	0.25	15	316 SS	C P
0.140	3.56	66311S	0.880	22.35	0.116	2.95	0.883	0.16	0.444	11.28	0.392	1.74	0.204	5.18	0.012	0.31	16	316 SS	C P
0.140	3.56	66312S	0.880	22.35	0.120	3.05	0.406	0.07	0.574	14.58	0.233	1.04	0.170	4.32	0.010	0.25	16	316 SS	C P
0.140	3.56	66313S	0.910	23.11	0.116	2.95	0.951	0.17	0.412	10.47	0.392	1.74	0.192	4.88	0.012	0.31	15	316 SS	C P
0.140	3.56	66314S	0.940	23.88	0.120	3.05	0.284	0.05	0.710	18.03	0.202	0.90	0.230	5.84	0.010	0.25	22	316 SS	C P
0.140	3.56	66315S	0.940	23.88	0.118	3.00	0.294	0.05	0.588	14.94	0.173	0.77	0.352	8.94	0.011	0.28	31	316 SS	C P
0.140	3.56	66316S	1.000	25.40	0.108	2.74	3.069	0.54	0.292	7.42	0.896	3.99	0.272	6.91	0.016	0.41	16	316 SS	C P
0.140	3.56	66317S	1.030	26.16	0.108	2.74	2.864	0.50	0.313	7.95	0.896	3.99	0.288	7.32	0.016	0.41	17	316 SS	C P
0.140	3.56	66318S	1.130	28.70	0.120	3.05	0.228	0.04	0.850	21.59	0.194	0.86	0.280	7.11	0.010	0.25	27	316 SS	C P
0.140	3.56	66319S	1.130	28.70	0.108	2.74	1.534	0.27	0.585	14.86	0.897	3.99	0.496	12.60	0.016	0.41	30	316 SS	C P
0.140	3.56	66320S	1.250	31.75	0.110	2.79	1.098	0.19	0.689	17.50	0.757	3.37	0.488	12.40	0.015	0.38	31.5	316 SS	C P
0.140	3.56	66321S	1.250	31.75	0.124	3.15	0.124	0.02	0.968	24.59	0.120	0.53	0.168	4.27	0.008	0.20	20	316 SS	C P
0.140	3.56	66323S	1.380	35.05	0.108	2.74	1.409	0.25	0.637	16.18	0.898	3.99	0.536	13.61	0.016	0.41	32.5	316 SS	C P
0.140	3.56	66324S	1.380	35.05	0.100	2.54	3.884	0.68	0.443	11.25	1.721	7.66	0.656	16.66	0.020	0.51	31.8	316 SS	C P
0.140	3.56	66325S	1.440	36.58	0.092	2.34	8.856	1.55	0.328	8.33	2.905	12.92	0.792	20.12	0.024	0.61	32	316 SS	C P
0.140	3.56	66326S	1.500	38.10	0.108	2.74	1.466	0.26	0.612	15.55	0.897	3.99	0.517	13.13	0.016	0.41	31.3	316 SS	C P
0.148	3.76	60565S	0.250	6.35	0.116	2.95	9.910	1.74	0.091	2.31	0.898	3.99	0.092	2.34	0.016	0.41	5.8	316 SS	CG P
0.148	3.76	60566S	0.310	7.95	0.116	2.95	7.660	1.34	0.117	2.97	0.898	3.99	0.109	2.77	0.016	0.41	6.8	316 SS	CG P
0.148	3.76	60567S	0.380	9.53	0.116	2.95	6.250	1.09	0.144	3.66	0.898	3.99	0.126	3.20	0.016	0.41	7.9	316 SS	CG P
0.148	3.76	60568S	0.440	11.13	0.116	2.95	5.330	0.93	0.168	4.27	0.898	3.99	0.144	3.66	0.016	0.41	9	316 SS	CG P
0.148	3.76	60569S	0.500	12.70	0.116	2.95	4.580	0.80	0.196	4.98	0.898	3.99	0.161	4.09	0.016	0.41	10.1	316 SS	CG P
0.148	3.76	60570S	0.560	14.30	0.116	2.95	4.080	0.71	0.220	5.59	0.898	3.99	0.180	4.57	0.016	0.41	11.1	316 SS	CG P
0.148	3.76	60571S	0.630	15.88	0.116	2.95	3.670	0.64	0.245	6.22	0.898	3.99	0.195	4.95	0.016	0.41	12.2	316 SS	CG P
0.148	3.76	60572S	0.690	17.48	0.116	2.95	3.250	0.57	0.276	7.01	0.898	3.99	0.212	5.38	0.016	0.41	13.3	316 SS	CG P
0.148	3.76	60573S																	




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm		Wire Dia. Inches mm		Total Coils	E Mat'l	F Ends	s h	
0.148	3.76	60593S	0.250	6.35	0.104	2.64	26.660	4.67	0.082	2.08	2.190	9.74	0.165	4.19	0.022	0.56	7.5	316 SS CG P
0.148	3.76	60594S	0.310	7.95	0.104	2.64	20.830	3.64	0.105	2.67	2.190	9.74	0.198	5.03	0.022	0.56	9	316 SS CG P
0.148	3.76	60595S	0.380	9.53	0.104	2.64	16.660	2.92	0.131	3.33	2.190	9.74	0.237	6.03	0.022	0.56	10.8	316 SS CG P
0.148	3.76	60596S	0.440	11.13	0.104	2.64	14.160	2.48	0.155	3.94	2.190	9.74	0.271	6.89	0.022	0.56	12.3	316 SS CG P
0.148	3.76	60597S	0.500	12.70	0.104	2.64	12.250	2.14	0.179	4.55	2.190	9.74	0.307	7.80	0.022	0.56	14	316 SS CG P
0.148	3.76	60598S	0.560	14.30	0.104	2.64	10.830	1.90	0.202	5.13	2.190	9.74	0.341	8.66	0.022	0.56	15.5	316 SS CG P
0.148	3.76	60599S	0.630	15.88	0.104	2.64	9.750	1.71	0.225	5.72	2.190	9.74	0.374	9.50	0.022	0.56	17	316 SS CG P
0.148	3.76	60600S	0.690	17.48	0.104	2.64	8.750	1.53	0.250	6.35	2.190	9.74	0.411	10.45	0.022	0.56	18.7	316 SS CG P
0.148	3.76	60601S	0.750	19.05	0.104	2.64	8.080	1.41	0.271	6.88	2.190	9.74	0.443	11.24	0.022	0.56	20.1	316 SS CG P
0.148	3.76	60602S	0.810	20.65	0.104	2.64	7.410	1.30	0.295	7.49	2.190	9.74	0.479	12.16	0.022	0.56	21.8	316 SS CG P
0.148	3.76	60603S	0.940	23.83	0.104	2.64	6.250	1.09	0.351	8.92	2.190	9.74	0.559	14.21	0.022	0.56	25.4	316 SS CG P
0.148	3.76	60604S	1.000	25.40	0.104	2.64	5.830	1.02	0.376	9.55	2.190	9.74	0.596	15.14	0.022	0.56	27.1	316 SS CG P
0.148	3.76	60605S	1.250	31.75	0.104	2.64	4.830	0.85	0.453	11.51	2.190	9.74	0.711	18.05	0.022	0.56	32.3	316 SS CG P
0.148	3.76	60606S	1.500	38.10	0.104	2.64	4.000	0.70	0.548	13.92	2.190	9.74	0.849	21.57	0.022	0.56	38.6	316 SS CG P
0.148	3.76	60607S	0.250	6.35	0.102	2.59	39.570	6.92	0.062	1.58	2.435	10.83	0.147	3.73	0.023	0.58	6.4	316 SS CG P
0.148	3.76	60608S	0.310	7.95	0.102	2.59	30.410	5.32	0.080	2.03	2.435	10.83	0.178	4.52	0.023	0.58	7.7	316 SS CG P
0.148	3.76	60609S	0.380	9.53	0.102	2.59	24.570	4.30	0.099	2.52	2.435	10.83	0.209	5.31	0.023	0.58	9.1	316 SS CG P
0.148	3.76	60610S	0.440	11.13	0.102	2.59	21.160	3.70	0.115	2.92	2.435	10.83	0.239	6.07	0.023	0.58	10.4	316 SS CG P
0.148	3.76	60611S	0.500	12.70	0.102	2.59	18.330	3.21	0.133	3.38	2.435	10.83	0.272	6.91	0.023	0.58	11.8	316 SS CG P
0.148	3.76	60612S	0.560	14.30	0.102	2.59	15.830	2.77	0.154	3.91	2.435	10.83	0.302	7.67	0.023	0.58	13.1	316 SS CG P
0.148	3.76	60613S	0.630	15.88	0.102	2.59	14.160	2.48	0.172	4.37	2.435	10.83	0.334	8.48	0.023	0.58	14.5	316 SS CG P
0.148	3.76	60614S	0.690	17.48	0.102	2.59	12.910	2.26	0.189	4.80	2.435	10.83	0.364	9.25	0.023	0.58	15.8	316 SS CG P
0.148	3.76	60615S	0.750	19.05	0.102	2.59	11.660	2.04	0.209	5.31	2.435	10.83	0.396	10.06	0.023	0.58	17.2	316 SS CG P
0.148	3.76	60616S	0.810	20.65	0.102	2.59	10.660	1.87	0.228	5.79	2.435	10.83	0.425	10.80	0.023	0.58	18.5	316 SS CG P
0.148	3.76	60617S	0.940	23.83	0.102	2.59	9.160	1.60	0.266	6.76	2.435	10.83	0.505	12.83	0.023	0.58	22	316 SS CG P
0.148	3.76	60618S	1.000	25.40	0.102	2.59	8.580	1.50	0.284	7.21	2.435	10.83	0.536	13.61	0.023	0.58	23.3	316 SS CG P
0.148	3.76	60619S	1.250	31.75	0.102	2.59	6.910	1.21	0.352	8.94	2.435	10.83	0.652	16.56	0.023	0.58	28.3	316 SS CG P
0.148	3.76	60620S	1.500	38.10	0.102	2.59	5.750	1.01	0.424	10.77	2.435	10.83	0.773	19.63	0.023	0.58	33.6	316 SS CG P
0.148	3.76	60999S	0.250	6.35	0.112	2.84	16.330	2.86	0.075	1.90	1.225	5.44	0.105	2.67	0.018	0.46	5.7	316 SS CG P
0.148	3.76	61000S	0.310	7.95	0.112	2.84	12.660	2.22	0.097	2.46	1.228	5.46	0.125	3.18	0.018	0.46	6.7	316 SS CG P
0.148	3.76	61001S	0.380	9.53	0.112	2.84	10.330	1.81	0.119	3.01	1.229	5.46	0.145	3.68	0.018	0.46	7.8	316 SS CG P
0.148	3.76	61002S	0.440	11.13	0.112	2.84	8.660	1.52	0.141	3.59	1.221	5.43	0.164	4.17	0.018	0.46	8.9	316 SS CG P
0.148	3.76	61003S	0.500	12.70	0.112	2.84	7.500	1.31	0.163	4.15	1.223	5.44	0.184	4.67	0.018	0.46	10	316 SS CG P
0.148	3.76	61004S	0.560	14.30	0.112	2.84	6.660	1.17	0.184	4.67	1.225	5.44	0.204	5.18	0.018	0.46	11	316 SS CG P
0.148	3.76	61005S	0.630	15.88	0.112	2.84	5.910	1.04	0.207	5.26	1.223	5.44	0.224	5.69	0.018	0.46	12.1	316 SS CG P
0.148	3.76	61006S	0.690	17.48	0.112	2.84	5.330	0.93	0.230	5.83	1.226	5.45	0.244	6.20	0.018	0.46	13.2	316 SS CG P
0.148	3.76	61007S	0.750	19.05	0.112	2.84	4.910	0.86	0.249	6.33	1.223	5.44	0.264	6.71	0.018	0.46	14.2	316 SS CG P
0.148	3.76	61008S	0.810	20.65	0.112	2.84	4.500	0.79	0.272	6.91	1.224	5.44	0.283	7.19	0.018	0.46	15.3	316 SS CG P
0.148	3.76	61009S	0.940	23.83	0.112	2.84	3.830	0.67	0.320	8.11	1.226	5.45	0.323	8.20	0.018	0.46	17.6	316 SS CG P
0.148	3.76	61010S	1.000	25.40	0.112	2.84	3.580	0.63	0.342	8.68	1.224	5.44	0.343	8.71	0.018	0.46	18.7	316 SS CG P
0.148	3.76	61011S	1.250	31.75	0.112	2.84	2.920	0.51	0.420	10.65	1.224	5.44	0.422	10.72	0.018	0.46	22.5	316 SS CG P
0.148	3.76	61012S	1.500	38.10	0.112	2.84	2.420	0.42	0.507	12.87	1.225	5.44	0.501	12.73	0.018	0.46	26.7	316 SS CG P
0.148	3.76	61198S	0.250	6.35	0.106	2.70	26.700	4.68	0.069	1.76	1.842	8.19	0.133	3.38	0.021	0.53	6.4	316 SS CG P
0.148	3.76	61199S	0.310	7.95	0.106	2.70	20.800	3.64	0.089	2.26	1.851	8.23	0.160	4.06	0.021	0.53	7.7	316 SS CG P
0.148	3.76	61200S	0.380	9.53	0.106	2.70	16.700	2.93	0.111	2.81	1.854	8.24	0.187	4.75	0.021	0.53	9.1	316 SS CG P
0.148	3.76	61201S	0.440	11.13	0.106	2.70	14.200	2.49	0.130	3.30	1.846	8.20	0.214	5.44	0.021	0.53	10.4	316 SS CG P
0.148	3.76	61202S	0.500	12.70	0.106	2.70	12.200	2.14	0.152	3.85	1.854	8.24	0.242	6.15	0.021	0.53	11.7	316 SS CG P
0.148	3.76	61203S	0.560	14.30	0.106	2.70	10.800	1.89	0.171	4.35	1.847	8.21	0.268	6.81	0.021	0.53	13	316 SS CG P
0.148	3.76	61204S	0.630	15.88	0.106	2.70	9.700	1.70	0.191	4.84	1.853	8.24	0.294	7.47	0.021	0.53	14.2	316 SS CG P
0.148	3.76	61205S	0.690	17.48	0.106	2.70	8.700	1.52	0.213	5.39	1.853	8.24	0.321	8.15	0.021	0.53	15.6	316 SS CG P
0.148	3.76	61206S	0.750	19.05	0.106	2.70	8.100	1.42	0.228	5.79	1.847	8.21	0.349	8.86	0.021	0.53	16.7	316 SS CG P
0.148	3.76	61207S	0.810	20.65	0.106	2.70	7.400	1.30	0.250	6.34	1.850	8.22	0.376	9.55	0.021	0.53	18	316 SS CG P
0.148	3.76	61208S	0.940	23.83	0.106	2.70	6.200	1.09	0.298	7.57	1.848	8.21	0.430	10.92	0.021	0.53	21.1	316 SS CG P
0.148	3.76	61209S	1.000	25.40	0.106	2.70	5.800	1.02	0.319	8.09	1.850	8.22	0.458	11.63	0.021	0.53	22.5	316 SS CG P
0.148	3.76	61210S	1.250	31.75	0.106	2.70	4.800	0.84	0.385	9.77	1.848	8.21	0.568	14.43	0.021	0.53	26.7	316 SS CG P
0.148	3.76	61211S	1.500	38.10	0.106	2.70	4.000	0.70	0.462	11.72	1.848	8.21	0.675	17.15	0.021	0.53		




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg Max. Defl. Inches	Sugg Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish								
mm		mm	mm	N/mm	mm	N	mm	mm			C	P								
0.156	3.96	66331S	0.310	7.87	0.142	3.61	0.074	0.01	0.203	5.16	0.015	0.07	0.107	2.72	0.007	0.18	14.3	316 SS	C	P
0.156	3.96	66332S	0.310	7.87	0.116	2.95	13.251	2.32	0.118	3.00	1.564	6.96	0.160	4.06	0.020	0.51	8	316 SS	CG	P
0.156	3.96	66333S	0.310	7.87	0.124	3.15	7.464	1.31	0.109	2.77	0.814	3.62	0.112	2.85	0.016	0.41	6	316 SS	C	P
0.156	3.96	66334S	0.310	7.87	0.126	3.20	3.225	0.56	0.160	4.06	0.516	2.30	0.150	3.81	0.015	0.38	9	316 SS	C	P
0.156	3.96	66335S	0.310	7.87	0.106	2.69	54.300	9.50	0.055	1.40	2.987	13.29	0.175	4.45	0.025	0.64	6	316 SS	C	P
0.156	3.96	66336S	0.310	7.87	0.126	3.20	4.515	0.79	0.151	3.84	0.682	3.03	0.120	3.05	0.015	0.38	7	316 SS	C	P
0.156	3.96	66339S	0.340	8.64	0.114	2.90	17.965	3.14	0.100	2.54	1.797	7.99	0.179	4.55	0.021	0.53	7.5	316 SS	C	P
0.156	3.96	66340S	0.340	8.64	0.116	2.95	13.251	2.32	0.118	3.00	1.564	6.96	0.180	4.57	0.020	0.51	8	316 SS	C	P
0.156	3.96	66341S	0.380	9.65	0.124	3.15	6.634	1.16	0.122	3.10	0.809	3.60	0.120	3.05	0.016	0.41	6.5	316 SS	C	P
0.156	3.96	66342S	0.380	9.65	0.112	2.85	18.723	3.28	0.110	2.79	2.060	9.16	0.187	4.75	0.022	0.56	8.5	316 SS	CG	P
0.156	3.96	66343S	0.380	9.65	0.108	2.74	32.785	5.74	0.081	2.06	2.656	11.81	0.180	4.57	0.024	0.61	7.5	316 SS	CG	P
0.156	3.96	66344S	0.380	9.65	0.100	2.54	81.414	14.25	0.051	1.30	4.152	18.47	0.210	5.33	0.028	0.71	6.5	316 SS	C	P
0.156	3.96	66345S	0.380	9.65	0.106	2.69	39.491	6.91	0.075	1.91	2.962	13.18	0.188	4.78	0.025	0.64	7.5	316 SS	CG	P
0.156	3.96	66346S	0.380	9.65	0.100	2.54	61.061	10.69	0.067	1.70	4.091	18.20	0.224	5.69	0.028	0.71	8	316 SS	CG	P
0.156	3.96	66347S	0.380	9.65	0.120	3.05	6.241	1.09	0.183	4.65	1.142	5.08	0.180	4.57	0.018	0.46	10	316 SS	CG	P
0.156	3.96	66348S	0.380	9.65	0.114	2.90	19.761	3.46	0.091	2.31	1.798	8.00	0.168	4.27	0.021	0.53	7	316 SS	C	P
0.156	3.96	66349S	0.380	9.65	0.116	2.95	15.902	2.78	0.098	2.49	1.558	6.93	0.160	4.06	0.020	0.51	7	316 SS	C	P
0.156	3.96	66350S	0.410	10.41	0.116	2.95	9.939	1.74	0.157	3.99	1.560	6.94	0.200	5.08	0.020	0.51	10	316 SS	CG	P
0.156	3.96	66351S	0.410	10.41	0.122	3.10	5.553	0.97	0.174	4.42	0.966	4.30	0.170	4.32	0.017	0.43	9	316 SS	C	P
0.156	3.96	66352S	0.410	10.41	0.112	2.85	24.340	4.26	0.085	2.16	2.069	9.20	0.176	4.47	0.022	0.56	7	316 SS	C	P
0.156	3.96	66353S	0.410	10.41	0.140	3.56	0.197	0.03	0.322	8.18	0.063	0.28	0.088	2.24	0.008	0.20	10	316 SS	C	P
0.156	3.96	66354S	0.410	10.41	0.140	3.56	0.158	0.03	0.306	7.77	0.048	0.21	0.104	2.64	0.008	0.20	12	316 SS	C	P
0.156	3.96	66355S	0.440	11.18	0.116	2.95	15.902	2.78	0.098	2.49	1.558	6.93	0.160	4.06	0.020	0.51	7	316 SS	C	P
0.156	3.96	66356S	0.440	11.18	0.124	3.15	3.732	0.65	0.217	5.51	0.810	3.60	0.176	4.47	0.016	0.41	10	316 SS	C	P
0.156	3.96	66357S	0.440	11.18	0.136	3.45	1.004	0.18	0.209	5.31	0.210	0.93	0.070	1.78	0.010	0.25	6	316 SS	C	P
0.156	3.96	66358S	0.470	11.94	0.124	3.15	4.777	0.84	0.170	4.32	0.812	3.61	0.148	3.76	0.016	0.41	8.3	316 SS	C	P
0.156	3.96	66359S	0.500	12.70	0.096	2.44	84.359	14.76	0.059	1.50	4.977	22.14	0.270	6.86	0.030	0.76	8	316 SS	C	P
0.156	3.96	66360S	0.500	12.70	0.124	3.15	3.317	0.58	0.244	6.20	0.809	3.60	0.192	4.88	0.016	0.41	11	316 SS	C	P
0.156	3.96	66361S	0.500	12.70	0.104	2.64	28.889	5.06	0.115	2.92	3.322	14.78	0.286	7.26	0.026	0.66	11	316 SS	CG	P
0.156	3.96	66362S	0.500	12.70	0.128	3.25	1.048	0.18	0.234	5.94	0.245	1.09	0.266	6.76	0.014	0.36	18	316 SS	C	P
0.156	3.96	66363S	0.530	13.46	0.112	2.85	11.064	1.94	0.186	4.72	2.058	9.15	0.286	7.26	0.022	0.56	13	316 SS	CG	P
0.156	3.96	66364S	0.530	13.46	0.108	2.74	21.214	3.71	0.125	3.18	2.652	11.80	0.252	6.40	0.024	0.61	10.5	316 SS	CG	P
0.156	3.96	66365S	0.560	14.22	0.104	2.64	31.325	5.48	0.106	2.69	3.320	14.77	0.268	6.81	0.026	0.66	10.3	316 SS	CG	P
0.156	3.96	66366S	0.560	14.22	0.116	2.95	9.245	1.62	0.169	4.29	1.562	6.95	0.232	5.89	0.020	0.51	10.6	316 SS	C	P
0.156	3.96	66367S	0.560	14.22	0.106	2.69	21.720	3.80	0.137	3.48	2.976	13.24	0.325	8.26	0.025	0.64	12	316 SS	C	P
0.156	3.96	66368S	0.560	14.22	0.108	2.74	20.035	3.51	0.132	3.35	2.645	11.77	0.288	7.32	0.024	0.61	11	316 SS	C	P
0.156	3.96	66369S	0.560	14.22	0.100	2.54	48.848	8.55	0.084	2.13	4.103	18.25	0.266	6.76	0.028	0.71	9.5	316 SS	CG	P
0.156	3.96	66370S	0.560	14.22	0.132	3.35	1.085	0.19	0.326	8.28	0.354	1.58	0.132	3.35	0.012	0.31	10	316 SS	C	P
0.156	3.96	66371S	0.590	14.99	0.116	2.95	9.939	1.74	0.157	3.99	1.560	6.94	0.220	5.59	0.020	0.51	10	316 SS	C	P
0.156	3.96	66372S	0.630	16.00	0.116	2.95	13.251	2.32	0.118	3.00	1.564	6.96	0.180	4.57	0.020	0.51	8	316 SS	C	P
0.156	3.96	66373S	0.630	16.00	0.130	3.30	2.035	0.36	0.220	5.59	0.448	1.99	0.117	2.97	0.013	0.33	8	316 SS	C	P
0.156	3.96	66374S	0.630	16.00	0.134	3.40	1.044	0.18	0.261	6.63	0.272	1.21	0.096	2.44	0.011	0.28	7.8	316 SS	C	P
0.156	3.96	66375S	0.630	16.00	0.116	2.95	15.902	2.78	0.098	2.49	1.558	6.93	0.160	4.06	0.020	0.51	7	316 SS	C	P
0.156	3.96	66376S	0.630	16.00	0.126	3.20	1.505	0.26	0.360	9.14	0.542	2.41	0.270	6.86	0.015	0.38	17	316 SS	C	P
0.156	3.96	66377S	0.660	16.76	0.116	2.95	5.679	0.99	0.274	6.96	1.556	6.92	0.340	8.64	0.020	0.51	16	316 SS	C	P
0.156	3.96	66378S	0.670	17.02	0.136	3.45	0.335	0.06	0.520	13.21	0.174	0.77	0.150	3.81	0.010	0.25	14	316 SS	C	P
0.156	3.96	66379S	0.690	17.53	0.112	2.85	9.361	1.64	0.220	5.59	2.059	9.16	0.330	8.38	0.022	0.56	15	316 SS	CG	P
0.156	3.96	66380S	0.750	19.05	0.140	3.56	0.144	0.03	0.638	16.21	0.092	0.41	0.112	2.85	0.008	0.20	13	316 SS	C	P
0.156	3.96	66381S	0.750	19.05	0.136	3.45	0.309	0.05	0.590	14.99	0.182	0.81	0.160	4.06	0.010	0.25	15	316 SS	C	P
0.156	3.96	66382S	0.750	19.05	0.120	3.05	3.121	0.55	0.367	9.32	1.145	5.09	0.324	8.23	0.018	0.46	18	316 SS	CG	P
0.156	3.96	66383S	0.750	19.05	0.124	3.15	2.132	0.37	0.380	9.65	0.810	3.60	0.272	6.91	0.016	0.41	16	316 SS	C	P
0.156	3.96	66384S	0.750	19.05	0.108	2.74	18.032	3.16	0.147	3.73	2.651	11.79	0.312	7.93	0.024	0.61	12	316 SS	C	P
0.156	3.96	66385S	0.750	19.05	0.136	3.45	0.268	0.05	0.570	14.48	0.153	0.68	0.180	4.57	0.010	0.25	17	316 SS	C	P
0.156	3.96	66386S	0.810	20.57	0.100	2.54	22.898	4.01	0.180	4.57	4.122	18.34	0.504	12.80	0.028	0.71	18	316 SS	CG	




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm		Wire Dia. Inches mm		Total Coils	Mat'l	E n d s	F in sh	
0.156	3.96	66409S	1.340	34.04	0.116	2.95	3.180	0.56	0.490	12.45	1.558	6.93	0.560	14.22	0.020	0.51	27	316 SS C P
0.156	3.96	66410S	1.380	35.05	0.124	3.15	1.588	0.28	0.510	12.95	0.810	3.60	0.349	8.87	0.016	0.41	20.8	316 SS C P
0.156	3.96	66411S	1.380	35.05	0.100	2.54	14.200	2.49	0.291	7.39	4.132	18.38	0.806	20.47	0.028	0.71	27.8	316 SS C P
0.156	3.96	66412S	1.380	35.05	0.128	3.25	0.998	0.18	0.559	14.20	0.558	2.48	0.277	7.04	0.014	0.36	18.8	316 SS C P
0.156	3.96	66413S	1.380	35.05	0.130	3.30	0.773	0.14	0.580	14.73	0.448	1.99	0.244	6.20	0.013	0.33	17.8	316 SS C P
0.156	3.96	66414S	1.380	35.05	0.122	3.10	1.424	0.25	0.680	17.27	0.968	4.31	0.515	13.08	0.017	0.43	29.3	316 SS C P
0.156	3.96	66415S	1.500	38.10	0.116	2.95	3.457	0.61	0.451	11.46	1.559	6.93	0.500	12.70	0.020	0.51	25	316 SS CG P
0.156	3.96	66416S	1.560	39.62	0.116	2.95	2.092	0.37	0.740	18.80	1.548	6.89	0.820	20.83	0.020	0.51	40	316 SS C P
0.156	3.96	66417S	1.630	41.40	0.126	3.20	0.903	0.16	0.757	19.23	0.684	3.04	0.420	10.67	0.015	0.38	27	316 SS C P
0.156	3.96	66418S	1.750	44.45	0.124	3.15	1.244	0.22	0.651	16.54	0.810	3.60	0.432	10.97	0.016	0.41	26	316 SS C P
0.156	3.96	66419S	1.750	44.45	0.100	2.54	11.002	1.93	0.375	9.53	4.126	18.35	1.016	25.81	0.028	0.71	35.3	316 SS C P
0.156	3.96	66420S	1.750	44.45	0.128	3.25	0.780	0.14	0.715	18.16	0.558	2.48	0.343	8.71	0.014	0.36	23.5	316 SS C P
0.156	3.96	66421S	1.750	44.45	0.130	3.30	0.610	0.11	0.734	18.64	0.448	1.99	0.299	7.60	0.013	0.33	22	316 SS C P
0.156	3.96	66422S	1.750	44.45	0.136	3.45	0.106	0.02	1.340	34.04	0.142	0.63	0.410	10.41	0.010	0.25	40	316 SS C P
0.156	3.96	60228S	0.250	6.35	0.136	3.45	1.830	0.32	0.109	2.77	0.200	0.89	0.052	1.32	0.010	0.25	4.2	316 SS C P
0.156	3.96	60229S	0.310	7.95	0.136	3.45	1.420	0.25	0.141	3.58	0.200	0.89	0.058	1.47	0.010	0.25	4.8	316 SS C P
0.156	3.96	60230S	0.380	9.53	0.136	3.45	1.170	0.20	0.172	4.37	0.200	0.89	0.064	1.63	0.010	0.25	5.4	316 SS C P
0.156	3.96	60231S	0.440	11.13	0.136	3.45	0.990	0.17	0.202	5.13	0.200	0.89	0.071	1.80	0.010	0.25	6.1	316 SS C P
0.156	3.96	60232S	0.500	12.70	0.136	3.45	0.860	0.15	0.234	5.94	0.200	0.89	0.077	1.96	0.010	0.25	6.7	316 SS C P
0.156	3.96	60233S	0.560	14.30	0.136	3.45	0.760	0.13	0.264	6.71	0.200	0.89	0.083	2.11	0.010	0.25	7.3	316 SS C P
0.156	3.96	60234S	0.630	15.88	0.136	3.45	0.680	0.12	0.297	7.54	0.200	0.89	0.089	2.26	0.010	0.25	7.9	316 SS C P
0.156	3.96	60235S	0.750	19.05	0.136	3.45	0.560	0.10	0.359	9.12	0.200	0.89	0.102	2.59	0.010	0.25	9.2	316 SS C P
0.156	3.96	60236S	0.880	22.23	0.136	3.45	0.480	0.08	0.422	10.72	0.200	0.89	0.114	2.90	0.010	0.25	10.4	316 SS C P
0.156	3.96	60237S	1.000	25.40	0.136	3.45	0.420	0.07	0.481	12.22	0.200	0.89	0.127	3.23	0.010	0.25	11.7	316 SS C P
0.156	3.96	60238S	0.250	6.35	0.134	3.40	2.570	0.45	0.109	2.77	0.280	1.25	0.061	1.55	0.011	0.28	4.5	316 SS C P
0.156	3.96	60239S	0.310	7.95	0.134	3.40	1.990	0.35	0.141	3.58	0.280	1.25	0.068	1.73	0.011	0.28	5.2	316 SS C P
0.156	3.96	60240S	0.380	9.53	0.134	3.40	1.620	0.28	0.172	4.37	0.280	1.25	0.076	1.93	0.011	0.28	5.9	316 SS C P
0.156	3.96	60241S	0.440	11.13	0.134	3.40	1.370	0.24	0.204	5.18	0.280	1.25	0.083	2.11	0.011	0.28	6.5	316 SS C P
0.156	3.96	60242S	0.500	12.70	0.134	3.40	1.190	0.21	0.235	5.97	0.280	1.25	0.091	2.31	0.011	0.28	7.3	316 SS C P
0.156	3.96	60243S	0.560	14.30	0.134	3.40	1.050	0.18	0.267	6.78	0.280	1.25	0.099	2.51	0.011	0.28	8	316 SS C P
0.156	3.96	60244S	0.630	15.88	0.134	3.40	0.940	0.17	0.297	7.54	0.280	1.25	0.106	2.69	0.011	0.28	8.6	316 SS C P
0.156	3.96	60245S	0.750	19.05	0.134	3.40	0.780	0.14	0.361	9.17	0.280	1.25	0.122	3.10	0.011	0.28	10.1	316 SS C P
0.156	3.96	60246S	0.880	22.23	0.134	3.40	0.660	0.12	0.425	10.80	0.280	1.25	0.137	3.48	0.011	0.28	11.5	316 SS C P
0.156	3.96	60247S	1.000	25.40	0.134	3.40	0.580	0.10	0.487	12.37	0.280	1.25	0.152	3.86	0.011	0.28	12.8	316 SS C P
0.156	3.96	60248S	0.250	6.35	0.132	3.35	3.460	0.61	0.099	2.52	0.343	1.53	0.066	1.68	0.012	0.30	4.5	316 SS C P
0.156	3.96	60249S	0.310	7.95	0.132	3.35	2.670	0.47	0.128	3.25	0.343	1.53	0.075	1.91	0.012	0.30	5.3	316 SS C P
0.156	3.96	60250S	0.380	9.53	0.132	3.35	2.180	0.38	0.157	3.99	0.343	1.53	0.084	2.13	0.012	0.30	6	316 SS C P
0.156	3.96	60251S	0.440	11.13	0.132	3.35	1.840	0.32	0.186	4.72	0.343	1.53	0.093	2.36	0.012	0.30	6.8	316 SS C P
0.156	3.96	60252S	0.500	12.70	0.132	3.35	1.600	0.28	0.214	5.44	0.343	1.53	0.101	2.57	0.012	0.30	7.4	316 SS C P
0.156	3.96	60253S	0.560	14.30	0.132	3.35	1.410	0.25	0.243	6.17	0.343	1.53	0.110	2.79	0.012	0.30	8.2	316 SS C P
0.156	3.96	60254S	0.630	15.88	0.132	3.35	1.260	0.22	0.272	6.91	0.343	1.53	0.119	3.02	0.012	0.30	8.9	316 SS C P
0.156	3.96	60255S	0.750	19.05	0.132	3.35	1.030	0.18	0.332	8.43	0.343	1.53	0.136	3.45	0.012	0.30	10.3	316 SS C P
0.156	3.96	60256S	0.880	22.23	0.132	3.35	0.880	0.16	0.388	9.86	0.343	1.53	0.154	3.91	0.012	0.30	11.8	316 SS C P
0.156	3.96	60257S	1.000	25.40	0.132	3.35	0.770	0.13	0.447	11.35	0.343	1.53	0.172	4.37	0.012	0.30	13.3	316 SS C P
0.156	3.96	60258S	0.250	6.35	0.130	3.30	4.570	0.80	0.099	2.52	0.453	2.02	0.074	1.88	0.013	0.33	4.7	316 SS C P
0.156	3.96	60259S	0.380	9.53	0.130	3.30	2.870	0.50	0.158	4.01	0.453	2.02	0.094	2.39	0.013	0.33	6.2	316 SS C P
0.156	3.96	60260S	0.500	12.70	0.130	3.30	2.090	0.37	0.217	5.51	0.453	2.02	0.115	2.92	0.013	0.33	7.8	316 SS C P
0.156	3.96	60261S	0.630	15.88	0.130	3.30	1.650	0.29	0.275	6.99	0.453	2.02	0.135	3.43	0.013	0.33	9.4	316 SS C P
0.156	3.96	60262S	0.750	19.05	0.130	3.30	1.360	0.24	0.334	8.48	0.453	2.02	0.156	3.96	0.013	0.33	11	316 SS C P
0.156	3.96	60263S	1.000	25.40	0.130	3.30	1.010	0.18	0.450	11.43	0.453	2.02	0.197	5.00	0.013	0.33	14.2	316 SS C P
0.156	3.96	60621S	0.250	6.35	0.124	3.15	9.010	1.58	0.095	2.41	0.855	3.80	0.087	2.21	0.016	0.41	5.4	316 SS CG P
0.156	3.96	60622S	0.310	7.95	0.124	3.15	6.990	1.22	0.122	3.10	0.855	3.80	0.103	2.62	0.016	0.41	6.4	316 SS CG P
0.156	3.96	60623S	0.380	9.53	0.124	3.15	5.730	1.00	0.149	3.79	0.855	3.80	0.118	3.00	0.016	0.41	7.4	316 SS CG P
0.156	3.96	60624S	0.440	11.13	0.124	3.15	4.840	0.85	0.177	4.50	0.855	3.80	0.134	3.40	0.016	0.41	8.4	316 SS CG P
0.156	3.96	60625S	0.500	12.70	0.124	3.15	4.200	0.74	0.204	5.18	0.855	3.80	0.149	3.78	0.016	0.41	9.3	316 SS CG P
0.156	3.96	60626S	0.560	14.30	0.124	3.15	3.700	0.65	0.231	5.87	0.855	3.80	0.165	4.19	0.016	0.41	10.3	316 SS CG P




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In., N/mm	Sugg Max. Defl. Inches	Sugg Max. Load Lbs., N	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish								
mm		mm	mm		mm		mm	mm												
0.156	3.96	60646S	1.250	31.75	0.110	2.79	6.790	1.19	0.342	8.69	2.324	10.34	0.566	14.38	0.023	0.58	24.6	316 SS	CG	P
0.156	3.96	60647S	1.500	38.10	0.110	2.79	5.620	0.98	0.413	10.49	2.324	10.34	0.673	17.09	0.023	0.58	29.3	316 SS	CG	P
0.156	3.96	61315S	0.250	6.35	0.110	2.80	40.110	7.02	0.057	1.45	2.286	10.16	0.135	3.43	0.023	0.58	5.7	316 SS	CG	P
0.156	3.96	61316S	0.310	7.95	0.110	2.80	30.640	5.37	0.075	1.90	2.298	10.21	0.162	4.12	0.023	0.58	6.9	316 SS	CG	P
0.156	3.96	61317S	0.380	9.53	0.110	2.80	24.870	4.36	0.092	2.34	2.288	10.17	0.189	4.80	0.023	0.58	8	316 SS	CG	P
0.156	3.96	61318S	0.440	11.13	0.110	2.80	20.870	3.66	0.110	2.79	2.296	10.20	0.216	5.49	0.023	0.58	9.1	316 SS	CG	P
0.156	3.96	61319S	0.500	12.70	0.110	2.80	18.020	3.16	0.127	3.23	2.289	10.17	0.243	6.17	0.023	0.58	10.3	316 SS	CG	P
0.156	3.96	61320S	0.560	14.30	0.110	2.80	15.830	2.77	0.145	3.67	2.295	10.20	0.270	6.86	0.023	0.58	11.4	316 SS	CG	P
0.156	3.96	61321S	0.630	15.88	0.110	2.80	14.130	2.48	0.162	4.11	2.289	10.17	0.297	7.53	0.023	0.58	12.5	316 SS	CG	P
0.156	3.96	61322S	0.690	17.48	0.110	2.80	12.740	2.23	0.180	4.56	2.294	10.20	0.324	8.22	0.023	0.58	13.7	316 SS	CG	P
0.156	3.96	61323S	0.750	19.05	0.110	2.80	11.620	2.04	0.197	5.00	2.289	10.17	0.350	8.90	0.023	0.58	14.8	316 SS	CG	P
0.156	3.96	61324S	0.810	20.65	0.110	2.80	10.670	1.87	0.215	5.45	2.293	10.19	0.378	9.59	0.023	0.58	15.9	316 SS	CG	P
0.156	3.96	61325S	0.940	23.83	0.110	2.80	9.170	1.61	0.250	6.34	2.293	10.19	0.431	10.96	0.023	0.58	18.2	316 SS	CG	P
0.156	3.96	61326S	1.000	25.40	0.110	2.80	8.580	1.50	0.267	6.78	2.290	10.18	0.458	11.63	0.023	0.58	19.3	316 SS	CG	P
0.156	3.96	61327S	1.250	31.75	0.110	2.80	6.800	1.19	0.337	8.56	2.290	10.18	0.566	14.37	0.023	0.58	23.9	316 SS	CG	P
0.156	3.96	61328S	1.500	38.10	0.110	2.80	5.630	0.99	0.407	10.34	2.290	10.18	0.673	17.09	0.023	0.58	28.4	316 SS	CG	P
0.158	4.01	66423S	0.750	19.05	0.116	2.95	11.818	2.07	0.150	3.81	1.773	7.89	0.231	5.87	0.021	0.53	10	316 SS	C	P
0.168	4.27	66424S	0.470	11.94	0.120	3.05	18.519	3.24	0.134	3.40	2.482	11.04	0.252	6.40	0.024	0.61	9.5	316 SS	C	P
0.172	4.37	66425S	0.190	4.83	0.140	3.56	7.193	1.26	0.094	2.39	0.676	3.01	0.096	2.44	0.016	0.41	5	316 SS	C	P
0.172	4.37	66426S	0.250	6.35	0.112	2.85	117.871	20.63	0.039	0.99	4.597	20.45	0.180	4.57	0.030	0.76	5	316 SS	C	P
0.172	4.37	66427S	0.250	6.35	0.140	3.56	8.631	1.51	0.086	2.18	0.742	3.30	0.072	1.83	0.016	0.41	4.5	316 SS	CG	P
0.172	4.37	66428S	0.250	6.35	0.116	2.95	102.924	18.01	0.037	0.94	3.808	16.94	0.154	3.91	0.028	0.71	4.5	316 SS	C	P
0.172	4.37	66429S	0.250	6.35	0.144	3.66	4.870	0.85	0.104	2.64	0.506	2.25	0.077	1.96	0.014	0.36	4.5	316 SS	C	P
0.172	4.37	66430S	0.280	7.11	0.156	3.96	0.211	0.04	0.212	5.39	0.045	0.20	0.068	1.73	0.008	0.20	7.5	316 SS	C	P
0.172	4.37	66431S	0.280	7.11	0.136	3.45	10.265	1.80	0.102	2.59	1.047	4.66	0.117	2.97	0.018	0.46	5.5	316 SS	C	P
0.172	4.37	66432S	0.310	7.87	0.124	3.15	34.114	5.97	0.071	1.80	2.422	10.77	0.138	3.51	0.024	0.61	5.8	316 SS	CG	P
0.172	4.37	66433S	0.310	7.87	0.140	3.56	7.193	1.26	0.103	2.62	0.741	3.30	0.080	2.03	0.016	0.41	5	316 SS	CG	P
0.172	4.37	66434S	0.310	7.87	0.148	3.76	3.164	0.55	0.102	2.59	0.323	1.44	0.060	1.52	0.012	0.31	4	316 SS	C	P
0.172	4.37	66435S	0.310	7.87	0.148	3.76	1.266	0.22	0.226	5.74	0.286	1.27	0.084	2.13	0.012	0.31	7	316 SS	CG	P
0.172	4.37	66436S	0.340	8.64	0.122	3.10	43.919	7.69	0.062	1.58	2.723	12.11	0.163	4.14	0.025	0.64	5.5	316 SS	C	P
0.172	4.37	66437S	0.340	8.64	0.142	3.61	4.088	0.72	0.152	3.86	0.621	2.76	0.105	2.67	0.015	0.38	6	316 SS	C	P
0.172	4.37	66438S	0.340	8.64	0.140	3.56	5.395	0.94	0.137	3.48	0.739	3.29	0.112	2.85	0.016	0.41	6	316 SS	C	P
0.172	4.37	66439S	0.340	8.64	0.136	3.45	8.982	1.57	0.116	2.95	1.042	4.64	0.090	2.29	0.018	0.46	4	316 SS	O	P
0.172	4.37	66440S	0.380	9.65	0.122	3.10	38.429	6.73	0.071	1.80	2.728	12.13	0.175	4.45	0.025	0.64	6	316 SS	C	P
0.172	4.37	66441S	0.380	9.65	0.138	3.51	5.607	0.98	0.157	3.99	0.880	3.91	0.136	3.45	0.017	0.43	7	316 SS	C	P
0.172	4.37	66442S	0.380	9.65	0.132	3.35	11.390	1.99	0.125	3.18	1.424	6.33	0.160	4.06	0.020	0.51	7	316 SS	C	P
0.172	4.37	66443S	0.410	10.41	0.120	3.05	36.709	6.42	0.083	2.11	3.047	13.55	0.208	5.28	0.026	0.66	7	316 SS	C	P
0.172	4.37	66444S	0.410	10.41	0.112	2.85	64.294	11.25	0.072	1.83	4.629	20.59	0.255	6.48	0.030	0.76	7.5	316 SS	C	P
0.172	4.37	66445S	0.410	10.41	0.142	3.61	2.044	0.36	0.245	6.22	0.501	2.23	0.165	4.19	0.015	0.38	10	316 SS	C	P
0.172	4.37	66446S	0.410	10.41	0.142	3.61	2.180	0.38	0.267	6.78	0.582	2.59	0.143	3.63	0.015	0.38	9.5	316 SS	CG	P
0.172	4.37	66447S	0.410	10.41	0.124	3.15	21.322	3.73	0.114	2.90	2.431	10.81	0.216	5.49	0.024	0.61	8	316 SS	C	P
0.172	4.37	66448S	0.440	11.18	0.144	3.66	1.739	0.30	0.292	7.42	0.508	2.26	0.126	3.20	0.014	0.36	9	316 SS	CG	P
0.172	4.37	66449S	0.440	11.18	0.136	3.45	6.248	1.09	0.167	4.24	1.043	4.64	0.158	4.01	0.018	0.46	7.8	316 SS	C	P
0.172	4.37	66450S	0.440	11.18	0.132	3.35	8.136	1.42	0.175	4.45	1.424	6.33	0.200	5.08	0.020	0.51	9	316 SS	C	P
0.172	4.37	66451S	0.440	11.18	0.152	3.86	0.140	0.03	0.200	5.08	0.028	0.13	0.240	6.10	0.010	0.25	23	316 SS	C	P
0.172	4.37	66452S	0.440	11.18	0.132	3.35	7.119	1.25	0.200	5.08	1.424	6.33	0.220	5.59	0.020	0.51	10	316 SS	C	P
0.172	4.37	66454S	0.440	11.18	0.112	2.85	58.936	10.31	0.078	1.98	4.597	20.45	0.270	6.86	0.030	0.76	8	316 SS	C	P
0.172	4.37	66455S	0.450	11.43	0.124	3.15	14.214	2.49	0.162	4.12	2.303	10.24	0.288	7.32	0.024	0.61	11	316 SS	C	P
0.172	4.37	66456S	0.450	11.43	0.122	3.10	19.214	3.36	0.142	3.61	2.728	12.13	0.275	6.99	0.025	0.64	10	316 SS	C	P
0.172	4.37	66457S	0.470	11.94	0.122	3.10	17.080	2.99	0.160	4.06	2.733	12.16	0.300	7.62	0.025	0.64	11	316 SS	C	P
0.172	4.37	66458S	0.470	11.94	0.112	2.85	44.202	7.74	0.104	2.64	4.597	20.45	0.300	7.62	0.030	0.76	10	316 SS	CG	P
0.172	4.37	66459S	0.470	11.94	0.136	3.45	11.976	2.10	0.087	2.21	1.042	4.64	0.108	2.74	0.018	0.46	5	316 SS	C	P
0.172	4.37	66460S	0.500	12.70	0.128	3.25	9.640	1.69	0.195	4.95	1.880	8.36	0.242	6.15	0.022	0.56	11	316 SS	CG	P
0.172	4.37	66461S	0.500	12.70	0.112	2.85	47.149	8.25	0.098	2.49	4.621	20.55	0.28							




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D.		Rate		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length		Wire Dia. Inches mm		Total Coils	E N D S M a t' l	F n s h		
		Inches	mm	Inches	mm	Lbs./In. N/mm				Inches	mm							
0.172	4.37	66483S	0.750	19.05	0.132	3.35	4.746	0.83	0.300	7.62	1.424	6.33	0.300	7.62	0.020	0.51	14	316 SS C P
0.172	4.37	66484S	0.750	19.05	0.130	3.30	7.061	1.24	0.233	5.92	1.645	7.32	0.273	6.93	0.021	0.53	12	316 SS C P
0.172	4.37	66485S	0.750	19.05	0.140	3.56	1.798	0.32	0.411	10.44	0.739	3.29	0.208	5.28	0.016	0.41	12	316 SS O P
0.172	4.37	66486S	0.750	19.05	0.142	3.61	2.044	0.36	0.305	7.75	0.623	2.77	0.150	3.81	0.015	0.38	10	316 SS CG P
0.172	4.37	66487S	0.750	19.05	0.156	3.96	0.116	0.02	0.646	16.41	0.075	0.33	0.104	2.64	0.008	0.20	12	316 SS C P
0.172	4.37	66488S	0.780	19.81	0.140	3.56	2.697	0.47	0.274	6.96	0.739	3.29	0.176	4.47	0.016	0.41	10	316 SS C P
0.172	4.37	66489S	0.780	19.81	0.152	3.86	0.327	0.06	0.584	14.83	0.191	0.85	0.120	3.05	0.010	0.25	11	316 SS C P
0.172	4.37	66490S	0.810	20.57	0.152	3.86	0.256	0.05	0.665	16.89	0.170	0.76	0.145	3.68	0.010	0.25	13.5	316 SS C P
0.172	4.37	66491S	0.840	21.34	0.110	2.79	37.437	6.55	0.135	3.43	5.054	22.48	0.434	11.02	0.031	0.79	13	316 SS C P
0.172	4.37	66492S	0.880	22.35	0.128	3.25	7.230	1.27	0.260	6.60	1.880	8.36	0.330	8.38	0.022	0.56	14	316 SS C P
0.172	4.37	66493S	0.880	22.35	0.140	3.56	1.541	0.27	0.480	12.19	0.740	3.29	0.272	6.91	0.016	0.41	16	316 SS C P
0.172	4.37	66494S	0.880	22.35	0.138	3.51	2.003	0.35	0.440	11.18	0.881	3.92	0.289	7.34	0.017	0.43	16	316 SS C P
0.172	4.37	66495S	0.880	22.35	0.130	3.30	4.153	0.73	0.395	10.03	1.640	7.30	0.420	10.67	0.021	0.53	19	316 SS C P
0.172	4.37	66496S	0.880	22.35	0.142	3.61	1.168	0.20	0.533	13.54	0.623	2.77	0.255	6.48	0.015	0.38	16	316 SS C P
0.172	4.37	66497S	0.880	22.35	0.128	3.25	5.104	0.89	0.368	9.35	1.878	8.35	0.440	11.18	0.022	0.56	19	316 SS C P
0.172	4.37	66498S	0.940	23.88	0.140	3.56	1.798	0.32	0.411	10.44	0.739	3.29	0.240	6.10	0.016	0.41	14	316 SS C P
0.172	4.37	66499S	1.000	25.40	0.120	3.05	11.472	2.01	0.266	6.76	3.052	13.58	0.494	12.55	0.026	0.66	18	316 SS C P
0.172	4.37	66500S	1.000	25.40	0.116	2.95	24.506	4.29	0.154	3.91	3.774	16.79	0.378	9.60	0.028	0.71	12.5	316 SS C P
0.172	4.37	66501S	1.000	25.40	0.148	3.76	0.633	0.11	0.509	12.93	0.322	1.43	0.156	3.96	0.012	0.31	12	316 SS C P
0.172	4.37	66502S	1.130	28.70	0.112	2.85	23.574	4.13	0.195	4.95	4.597	20.45	0.540	13.72	0.030	0.76	17	316 SS C P
0.172	4.37	66503S	1.130	28.70	0.132	3.35	3.559	0.62	0.400	10.16	1.424	6.33	0.380	9.65	0.020	0.51	18	316 SS C P
0.172	4.37	66504S	1.160	29.46	0.110	2.79	20.591	3.60	0.245	6.22	5.045	22.44	0.682	17.32	0.031	0.79	22	316 SS CG P
0.172	4.37	66505S	1.220	30.99	0.122	3.10	8.176	1.43	0.334	8.48	2.731	12.15	0.545	13.84	0.025	0.64	20.8	316 SS C P
0.172	4.37	66506S	1.250	31.75	0.122	3.10	8.090	1.42	0.338	8.59	2.734	12.16	0.550	13.97	0.025	0.64	21	316 SS C P
0.172	4.37	66507S	1.250	31.75	0.128	3.25	7.230	1.27	0.260	6.60	1.880	8.36	0.330	8.38	0.022	0.56	14	316 SS C P
0.172	4.37	66508S	1.250	31.75	0.140	3.56	1.439	0.25	0.514	13.06	0.740	3.29	0.288	7.32	0.016	0.41	17	316 SS C P
0.172	4.37	66509S	1.380	35.05	0.142	3.61	0.629	0.11	0.945	24.00	0.594	2.64	0.435	11.05	0.015	0.38	28	316 SS C P
0.172	4.37	66510S	1.560	39.62	0.122	3.10	5.124	0.90	0.533	13.54	2.731	12.15	0.825	20.96	0.025	0.64	32	316 SS C P
0.172	4.37	66511S	2.250	57.15	0.156	3.96	0.064	0.01	1.531	38.89	0.098	0.44	0.168	4.27	0.008	0.20	20	316 SS C P
0.172	4.37	66512S	2.500	63.50	0.122	3.10	4.392	0.77	0.622	15.80	2.732	12.15	0.925	23.50	0.025	0.64	37	316 SS CG P
0.172	4.37	68010S	1.060	26.92	0.108	2.74	23.301	4.08	0.238	6.05	5.546	24.67	0.720	18.29	0.032	0.81	22.5	316 SS CG P
0.180	4.57	66513S	0.300	7.62	0.152	3.86	2.470	0.43	0.197	5.00	0.487	2.17	0.102	2.59	0.014	0.36	6.3	316 SS C P
0.180	4.57	66514S	0.550	13.97	0.132	3.35	14.095	2.47	0.165	4.19	2.326	10.35	0.234	5.94	0.024	0.61	9.8	316 SS CG P
0.180	4.57	66515S	0.810	20.57	0.128	3.25	14.895	2.61	0.197	5.00	2.934	13.05	0.325	8.26	0.026	0.66	12.5	316 SS CG P
0.180	4.57	60264S	0.250	6.35	0.160	4.06	1.640	0.29	0.106	2.69	0.174	0.77	0.046	1.17	0.010	0.25	3.6	316 SS C P
0.180	4.57	60265S	0.310	7.95	0.160	4.06	1.270	0.22	0.137	3.48	0.174	0.77	0.050	1.27	0.010	0.25	4	316 SS C P
0.180	4.57	60266S	0.380	9.53	0.160	4.06	1.050	0.18	0.166	4.22	0.174	0.77	0.050	1.27	0.010	0.25	4.4	316 SS C P
0.180	4.57	60267S	0.440	11.13	0.160	4.06	0.880	0.16	0.197	5.00	0.174	0.77	0.059	1.50	0.010	0.25	4.9	316 SS C P
0.180	4.57	60268S	0.500	12.70	0.160	4.06	0.770	0.13	0.227	5.77	0.174	0.77	0.063	1.60	0.010	0.25	5.3	316 SS C P
0.180	4.57	60269S	0.560	14.30	0.160	4.06	0.680	0.12	0.258	6.55	0.174	0.77	0.068	1.73	0.010	0.25	5.8	316 SS C P
0.180	4.57	60270S	0.630	15.88	0.160	4.06	0.610	0.11	0.287	7.29	0.174	0.77	0.072	1.83	0.010	0.25	6.2	316 SS C P
0.180	4.57	60271S	0.750	19.05	0.160	4.06	0.500	0.09	0.349	8.87	0.174	0.77	0.081	2.06	0.010	0.25	7.1	316 SS C P
0.180	4.57	60272S	0.880	22.23	0.160	4.06	0.430	0.07	0.410	10.41	0.174	0.77	0.090	2.29	0.010	0.25	8	316 SS C P
0.180	4.57	60273S	1.000	25.40	0.160	4.06	0.380	0.07	0.465	11.81	0.174	0.77	0.098	2.49	0.010	0.25	8.8	316 SS C P
0.180	4.57	60274S	1.250	31.75	0.160	4.06	0.300	0.05	0.581	14.76	0.174	0.77	0.116	2.95	0.010	0.25	10.6	316 SS C P
0.180	4.57	60275S	1.500	38.10	0.160	4.06	0.240	0.04	0.722	18.34	0.174	0.77	0.000	0.00	0.010	0.25	12.4	316 SS C P
0.180	4.57	60276S	0.250	6.35	0.156	3.96	3.000	0.53	0.100	2.54	0.298	1.33	0.060	1.52	0.012	0.30	4	316 SS C P
0.180	4.57	60277S	0.310	7.95	0.156	3.96	2.330	0.41	0.128	3.25	0.298	1.33	0.066	1.68	0.012	0.30	4.5	316 SS C P
0.180	4.57	60278S	0.380	9.53	0.156	3.96	1.920	0.34	0.156	3.96	0.298	1.33	0.073	1.85	0.012	0.30	5.1	316 SS C P
0.180	4.57	60279S	0.440	11.13	0.156	3.96	1.580	0.28	0.189	4.80	0.298	1.33	0.079	2.01	0.012	0.30	5.6	316 SS C P
0.180	4.57	60280S	0.500	12.70	0.156	3.96	1.420	0.25	0.211	5.36	0.298	1.33	0.086	2.18	0.012	0.30	6.2	316 SS C P
0.180	4.57	60281S	0.560	14.30	0.156	3.96	1.250	0.22	0.239	6.07	0.298	1.33	0.092	2.34	0.012	0.30	6.7	316 SS C P
0.180	4.57	60282S	0.630	15.88	0.156	3.96	1.080	0.19	0.276	7.01	0.298	1.33	0.099	2.51	0.012	0.30	7.3	316 SS C P
0.180	4.57	60283S	0.750	19.05	0.156	3.96	0.920	0.16	0.326	8.28	0.298	1.33	0.112	2.84	0.012	0.30	8.3	316 SS C P
0.180	4.57	60284S	0.880	22.23	0.156	3.96	0.750	0.13	0.398	10.11	0.298	1.33	0.125	3.18	0.012	0.30	9.4	316 SS C P
0.180	4.57	60285S	1.000	25.														




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.180	4.57	60653S	0.560	14.30	0.152	3.86	2.000	0.35	0.255	6.48	0.510	2.27	0.112	2.84	0.014	0.36	8	316 SS	CG	P
0.180	4.57	60654S	0.630	15.88	0.152	3.86	1.830	0.32	0.278	7.06	0.510	2.27	0.120	3.05	0.014	0.36	8.6	316 SS	CG	P
0.180	4.57	60655S	0.690	17.48	0.152	3.86	1.670	0.29	0.306	7.77	0.510	2.27	0.116	2.95	0.014	0.36	8.2	316 SS	CG	P
0.180	4.57	60656S	0.750	19.05	0.152	3.86	1.500	0.26	0.340	8.64	0.510	2.27	0.138	3.51	0.014	0.36	9.9	316 SS	CG	P
0.180	4.57	60657S	0.880	22.23	0.152	3.86	1.250	0.22	0.408	10.36	0.510	2.27	0.155	3.94	0.014	0.36	11.1	316 SS	CG	P
0.180	4.57	60658S	1.000	25.40	0.152	3.86	1.080	0.19	0.471	11.96	0.510	2.27	0.172	4.37	0.014	0.36	12.3	316 SS	CG	P
0.180	4.57	60659S	1.250	31.75	0.152	3.86	0.920	0.16	0.557	14.15	0.510	2.27	0.206	5.23	0.014	0.36	14.7	316 SS	CG	P
0.180	4.57	60660S	1.380	34.93	0.152	3.86	0.830	0.15	0.613	15.57	0.510	2.27	0.223	5.66	0.014	0.36	15.9	316 SS	CG	P
0.180	4.57	60661S	1.500	38.10	0.152	3.86	0.750	0.13	0.681	17.30	0.510	2.27	0.240	6.10	0.014	0.36	17.1	316 SS	CG	P
0.180	4.57	60662S	0.250	6.35	0.148	3.76	7.500	1.31	0.100	2.54	0.746	3.32	0.073	1.85	0.016	0.41	4.6	316 SS	CG	P
0.180	4.57	60663S	0.310	7.95	0.148	3.76	6.250	1.09	0.119	3.02	0.746	3.32	0.081	2.06	0.016	0.41	5.1	316 SS	CG	P
0.180	4.57	60664S	0.380	9.53	0.148	3.76	5.000	0.88	0.149	3.79	0.746	3.32	0.093	2.36	0.016	0.41	5.8	316 SS	CG	P
0.180	4.57	60665S	0.440	11.13	0.148	3.76	4.170	0.73	0.179	4.55	0.746	3.32	0.105	2.67	0.016	0.41	6.6	316 SS	CG	P
0.180	4.57	60666S	0.500	12.70	0.148	3.76	3.750	0.66	0.199	5.06	0.746	3.32	0.113	2.87	0.016	0.41	7.1	316 SS	CG	P
0.180	4.57	60667S	0.560	14.30	0.148	3.76	3.330	0.58	0.224	5.69	0.746	3.32	0.125	3.18	0.016	0.41	7.8	316 SS	CG	P
0.180	4.57	60668S	0.630	15.88	0.148	3.76	2.920	0.51	0.256	6.50	0.746	3.32	0.137	3.48	0.016	0.41	8.6	316 SS	CG	P
0.180	4.57	60669S	0.690	17.48	0.148	3.76	2.500	0.44	0.299	7.60	0.746	3.32	0.153	3.89	0.016	0.41	9.6	316 SS	CG	P
0.180	4.57	60670S	0.750	19.05	0.148	3.76	2.080	0.37	0.358	9.09	0.746	3.32	0.177	4.50	0.016	0.41	11.1	316 SS	CG	P
0.180	4.57	60671S	0.880	22.23	0.148	3.76	1.830	0.32	0.407	10.34	0.746	3.32	0.195	4.95	0.016	0.41	12.2	316 SS	CG	P
0.180	4.57	60672S	1.000	25.40	0.148	3.76	1.580	0.28	0.472	11.99	0.746	3.32	0.220	5.59	0.016	0.41	13.8	316 SS	CG	P
0.180	4.57	60673S	1.250	31.75	0.148	3.76	1.250	0.22	0.597	15.16	0.746	3.32	0.277	7.04	0.016	0.41	17.3	316 SS	CG	P
0.180	4.57	60674S	1.380	34.93	0.148	3.76	1.080	0.19	0.689	17.50	0.746	3.32	0.305	7.75	0.016	0.41	19.1	316 SS	CG	P
0.180	4.57	60675S	1.500	38.10	0.148	3.76	1.000	0.18	0.747	18.97	0.746	3.32	0.342	8.69	0.016	0.41	21.4	316 SS	CG	P
0.180	4.57	60676S	1.750	44.45	0.148	3.76	0.830	0.15	0.896	22.76	0.746	3.32	0.405	10.29	0.016	0.41	25.3	316 SS	CG	P
0.180	4.57	60677S	0.250	6.35	0.144	3.66	11.250	1.97	0.093	2.36	1.044	4.64	0.086	2.18	0.018	0.46	4.8	316 SS	CG	P
0.180	4.57	60678S	0.310	7.95	0.144	3.66	9.160	1.60	0.114	2.90	1.044	4.64	0.100	2.54	0.018	0.46	5.6	316 SS	CG	P
0.180	4.57	60679S	0.380	9.53	0.144	3.66	7.500	1.31	0.139	3.53	1.044	4.64	0.114	2.90	0.018	0.46	6.3	316 SS	CG	P
0.180	4.57	60680S	0.440	11.13	0.144	3.66	6.660	1.17	0.157	3.99	1.044	4.64	0.123	3.12	0.018	0.46	6.8	316 SS	CG	P
0.180	4.57	60681S	0.500	12.70	0.144	3.66	5.830	1.02	0.179	4.55	1.044	4.64	0.132	3.35	0.018	0.46	7.3	316 SS	CG	P
0.180	4.57	60682S	0.560	14.30	0.144	3.66	5.000	0.88	0.209	5.31	1.044	4.64	0.150	3.81	0.018	0.46	8.3	316 SS	CG	P
0.180	4.57	60683S	0.630	15.88	0.144	3.66	4.170	0.73	0.251	6.38	1.044	4.64	0.172	4.37	0.018	0.46	9.6	316 SS	CG	P
0.180	4.57	60684S	0.690	17.48	0.144	3.66	3.750	0.66	0.278	7.06	1.044	4.64	0.186	4.72	0.018	0.46	10.3	316 SS	CG	P
0.180	4.57	60685S	0.750	19.05	0.144	3.66	3.330	0.58	0.313	7.95	1.044	4.64	0.199	5.05	0.018	0.46	11.1	316 SS	CG	P
0.180	4.57	60686S	0.880	22.23	0.144	3.66	3.000	0.53	0.348	8.84	1.044	4.64	0.221	5.61	0.018	0.46	12.3	316 SS	CG	P
0.180	4.57	60687S	1.000	25.40	0.144	3.66	2.580	0.45	0.404	10.26	1.044	4.64	0.256	6.50	0.018	0.46	14.2	316 SS	CG	P
0.180	4.57	60688S	1.250	31.75	0.144	3.66	2.080	0.37	0.501	12.73	1.044	4.64	0.302	7.67	0.018	0.46	16.8	316 SS	CG	P
0.180	4.57	60689S	1.380	34.93	0.144	3.66	1.920	0.34	0.545	13.84	1.044	4.64	0.338	8.59	0.018	0.46	18.8	316 SS	CG	P
0.180	4.57	60690S	1.500	38.10	0.144	3.66	1.670	0.29	0.626	15.90	1.044	4.64	0.374	9.50	0.018	0.46	20.8	316 SS	CG	P
0.180	4.57	60691S	1.750	44.45	0.144	3.66	1.420	0.25	0.737	18.72	1.044	4.64	0.442	11.23	0.018	0.46	24.6	316 SS	CG	P
0.180	4.57	60692S	0.250	6.35	0.140	3.56	17.490	3.06	0.080	2.03	1.407	6.26	0.107	2.72	0.020	0.51	4.8	316 SS	CG	P
0.180	4.57	60693S	0.310	7.95	0.140	3.56	13.330	2.33	0.106	2.69	1.407	6.26	0.125	3.18	0.020	0.51	6.3	316 SS	CG	P
0.180	4.57	60694S	0.380	9.53	0.140	3.56	10.660	1.87	0.132	3.35	1.407	6.26	0.144	3.66	0.020	0.51	7.2	316 SS	CG	P
0.180	4.57	60695S	0.440	11.13	0.140	3.56	9.160	1.60	0.154	3.91	1.407	6.26	0.160	4.06	0.020	0.51	8	316 SS	CG	P
0.180	4.57	60696S	0.500	12.70	0.140	3.56	7.750	1.36	0.182	4.62	1.407	6.26	0.180	4.57	0.020	0.51	9	316 SS	CG	P
0.180	4.57	60697S	0.560	14.30	0.140	3.56	6.910	1.21	0.204	5.18	1.407	6.26	0.196	4.98	0.020	0.51	9.8	316 SS	CG	P
0.180	4.57	60698S	0.630	15.88	0.140	3.56	6.080	1.06	0.231	5.87	1.407	6.26	0.214	5.44	0.020	0.51	10.7	316 SS	CG	P
0.180	4.57	60699S	0.690	17.48	0.140	3.56	5.420	0.95	0.260	6.60	1.407	6.26	0.230	5.84	0.020	0.51	11.7	316 SS	CG	P
0.180	4.57	60700S	0.750	19.05	0.140	3.56	5.000	0.88	0.282	7.16	1.407	6.26	0.250	6.35	0.020	0.51	12.5	316 SS	CG	P
0.180	4.57	60701S	0.880	22.23	0.140	3.56	4.250	0.74	0.331	8.41	1.407	6.26	0.285	7.24	0.020	0.51	14.3	316 SS	CG	P
0.180	4.57	60702S	1.000	25.40	0.140	3.56	2.920	0.51	0.483	12.27	1.407	6.26	0.385	9.78	0.020	0.51	19.3	316 SS	CG	P
0.180	4.57	60704S	1.380	34.93	0.140	3.56	2.670	0.47	0.528	13.41	1.407	6.26	0.420	10.67	0.020	0.51	21	316 SS	CG	P
0.180	4.57	60705S	1.500	38.10	0.140	3.56	2.420	0.42	0.583	14.81	1.407	6.26	0.450	11.43	0.020	0.51	22.5	316 SS	CG	P
0.180	4.57	60706S	1.750	44.45	0.140	3.56	2.000	0.35	0.704	17.88	1.407	6.26	0.530	13.46	0.020	0.51	26.5	316 SS	CG	P
0.180	4.57	60707S	0.250	6.35	0.136	3.45	24.990	4.37	0.074	1.88	1.843	8.20	0.111	2.82	0.022	0.56	5	316 SS</		




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm		Wire Dia. Inches mm		Total Coils	E Mat'l Ends	F sh		
0.180	4.57	60728S	0.560	14.30	0.132	3.35	13.750	2.41	0.171	4.34	2.356	10.48	0.248	6.30	0.024	0.61	10.3	316 SS CG P
0.180	4.57	60729S	0.630	15.88	0.132	3.35	12.500	2.19	0.189	4.80	2.356	10.48	0.269	6.83	0.024	0.61	11.2	316 SS CG P
0.180	4.57	60730S	0.750	19.05	0.132	3.35	10.000	1.75	0.236	5.99	2.356	10.48	0.322	8.18	0.024	0.61	13.4	316 SS CG P
0.180	4.57	60731S	0.880	22.23	0.132	3.35	8.580	1.50	0.275	6.99	2.356	10.48	0.370	9.40	0.024	0.61	15.4	316 SS CG P
0.180	4.57	60732S	1.000	25.40	0.132	3.35	7.500	1.31	0.314	7.98	2.356	10.48	0.416	10.57	0.024	0.61	17.3	316 SS CG P
0.180	4.57	60733S	1.130	28.58	0.132	3.35	6.500	1.14	0.363	9.22	2.356	10.48	0.466	11.84	0.024	0.61	19.4	316 SS CG P
0.180	4.57	60734S	1.250	31.75	0.132	3.35	5.830	1.02	0.404	10.26	2.356	10.48	0.510	12.95	0.024	0.61	21.3	316 SS CG P
0.180	4.57	60735S	1.500	38.10	0.132	3.35	4.830	0.85	0.488	12.40	2.356	10.48	0.598	15.19	0.024	0.61	24.9	316 SS CG P
0.180	4.57	60736S	1.750	44.45	0.132	3.35	4.170	0.73	0.566	14.38	2.356	10.48	0.672	17.07	0.024	0.61	28	316 SS CG P
0.180	4.57	60737S	2.000	50.80	0.132	3.35	3.580	0.63	0.658	16.71	2.356	10.48	0.769	19.53	0.024	0.61	32	316 SS CG P
0.180	4.57	60738S	0.250	6.35	0.128	3.25	49.980	8.75	0.059	1.50	2.952	13.13	0.138	3.51	0.026	0.66	5.3	316 SS CG P
0.180	4.57	60739S	0.310	7.95	0.128	3.25	39.150	6.85	0.075	1.91	2.952	13.13	0.157	3.99	0.026	0.66	6	316 SS CG P
0.180	4.57	60740S	0.380	9.53	0.128	3.25	30.820	5.39	0.096	2.44	2.952	13.13	0.190	4.83	0.026	0.66	7.3	316 SS CG P
0.180	4.57	60741S	0.440	11.13	0.128	3.25	25.820	4.52	0.114	2.90	2.952	13.13	0.215	5.46	0.026	0.66	8.3	316 SS CG P
0.180	4.57	60742S	0.500	12.70	0.128	3.25	22.490	3.94	0.131	3.33	2.952	13.13	0.235	5.97	0.026	0.66	9	316 SS CG P
0.180	4.57	60743S	0.560	14.30	0.128	3.25	19.160	3.35	0.154	3.91	2.952	13.13	0.274	6.96	0.026	0.66	10.5	316 SS CG P
0.180	4.57	60744S	0.630	15.88	0.128	3.25	17.490	3.06	0.169	4.29	2.952	13.13	0.290	7.37	0.026	0.66	11	316 SS CG P
0.180	4.57	60745S	0.690	17.48	0.128	3.25	15.830	2.77	0.187	4.75	2.952	13.13	0.313	7.95	0.026	0.66	12	316 SS CG P
0.180	4.57	60746S	0.750	19.05	0.128	3.25	14.160	2.48	0.208	5.28	2.952	13.13	0.345	8.76	0.026	0.66	13.3	316 SS CG P
0.180	4.57	60747S	0.810	20.65	0.128	3.25	13.330	2.33	0.221	5.61	2.952	13.13	0.365	9.27	0.026	0.66	14	316 SS CG P
0.180	4.57	60748S	0.880	22.23	0.128	3.25	12.500	2.19	0.236	5.99	2.952	13.13	0.391	9.93	0.026	0.66	15	316 SS CG P
0.180	4.57	60749S	1.000	25.40	0.128	3.25	10.250	1.79	0.288	7.32	2.952	13.13	0.453	11.51	0.026	0.66	17.4	316 SS CG P
0.180	4.57	60750S	1.130	28.58	0.128	3.25	9.000	1.57	0.328	8.33	2.952	13.13	0.512	13.00	0.026	0.66	19.7	316 SS CG P
0.180	4.57	60751S	1.250	31.75	0.128	3.25	8.080	1.41	0.365	9.27	2.952	13.13	0.552	14.02	0.026	0.66	21.2	316 SS CG P
0.180	4.57	60752S	1.500	38.10	0.128	3.25	6.660	1.17	0.443	11.25	2.952	13.13	0.680	17.27	0.026	0.66	26.2	316 SS CG P
0.180	4.57	60753S	1.750	44.45	0.128	3.25	5.750	1.01	0.514	13.06	2.952	13.13	0.766	19.46	0.026	0.66	29.5	316 SS CG P
0.180	4.57	60754S	2.000	50.80	0.128	3.25	5.000	0.88	0.591	15.01	2.952	13.13	0.871	22.12	0.026	0.66	33.5	316 SS CG P
0.180	4.57	60755S	0.250	6.35	0.122	3.10	81.470	14.26	0.050	1.27	4.082	18.16	0.159	4.04	0.029	0.74	5.5	316 SS CG P
0.180	4.57	60756S	0.310	7.95	0.122	3.10	63.310	11.08	0.064	1.63	4.082	18.16	0.190	4.83	0.029	0.74	6.4	316 SS CG P
0.180	4.57	60757S	0.380	9.53	0.122	3.10	50.810	8.89	0.080	2.03	4.082	18.16	0.220	5.59	0.029	0.74	7.6	316 SS CG P
0.180	4.57	60758S	0.440	11.13	0.122	3.10	41.650	7.29	0.098	2.49	4.082	18.16	0.249	6.32	0.029	0.74	8.6	316 SS CG P
0.180	4.57	60759S	0.500	12.70	0.122	3.10	35.820	6.27	0.114	2.90	4.082	18.16	0.280	7.11	0.029	0.74	9.7	316 SS CG P
0.180	4.57	60760S	0.560	14.30	0.122	3.10	31.240	5.47	0.131	3.33	4.082	18.16	0.315	8.00	0.029	0.74	10.9	316 SS CG P
0.180	4.57	60761S	0.630	15.88	0.122	3.10	27.490	4.81	0.148	3.76	4.082	18.16	0.344	8.74	0.029	0.74	11.9	316 SS CG P
0.180	4.57	60762S	0.690	17.48	0.122	3.10	24.990	4.37	0.163	4.14	4.082	18.16	0.372	9.45	0.029	0.74	12.8	316 SS CG P
0.180	4.57	60763S	0.750	19.05	0.122	3.10	22.490	3.94	0.181	4.60	4.082	18.16	0.410	10.41	0.029	0.74	14.1	316 SS CG P
0.180	4.57	60764S	0.810	20.65	0.122	3.10	20.830	3.64	0.196	4.98	4.082	18.16	0.437	11.10	0.029	0.74	15.1	316 SS CG P
0.180	4.57	60765S	0.880	22.23	0.122	3.10	19.160	3.35	0.213	5.41	4.082	18.16	0.468	11.89	0.029	0.74	16.1	316 SS CG P
0.180	4.57	60766S	0.940	23.83	0.122	3.10	17.700	3.10	0.231	5.87	4.082	18.16	0.502	12.75	0.029	0.74	17.3	316 SS CG P
0.180	4.57	60767S	1.000	25.40	0.122	3.10	16.240	2.84	0.251	6.38	4.082	18.16	0.532	13.51	0.029	0.74	18.3	316 SS CG P
0.180	4.57	60768S	1.130	28.58	0.122	3.10	14.580	2.55	0.280	7.11	4.082	18.16	0.590	14.99	0.029	0.74	20.3	316 SS CG P
0.180	4.57	60769S	1.250	31.75	0.122	3.10	12.910	2.26	0.316	8.03	4.082	18.16	0.647	16.43	0.029	0.74	22.3	316 SS CG P
0.180	4.57	60770S	1.380	34.93	0.122	3.10	11.660	2.04	0.350	8.89	4.082	18.16	0.715	18.16	0.029	0.74	24.7	316 SS CG P
0.180	4.57	60771S	1.500	38.10	0.122	3.10	10.620	1.86	0.384	9.75	4.082	18.16	0.770	19.56	0.029	0.74	26.6	316 SS CG P
0.180	4.57	60772S	1.750	44.45	0.122	3.10	9.000	1.57	0.454	11.53	4.082	18.16	0.885	22.48	0.029	0.74	30.5	316 SS CG P
0.180	4.57	60773S	2.000	50.80	0.122	3.10	7.910	1.39	0.516	13.11	4.082	18.16	1.015	25.78	0.029	0.74	35	316 SS CG P
0.180	4.57	60774S	0.310	7.95	0.116	2.95	101.630	17.79	0.052	1.32	5.257	23.38	0.193	4.90	0.032	0.81	6	316 SS CG P
0.180	4.57	60775S	0.380	9.53	0.116	2.95	79.140	13.85	0.066	1.68	5.257	23.38	0.233	5.92	0.032	0.81	7.3	316 SS CG P
0.180	4.57	60776S	0.440	11.13	0.116	2.95	66.640	11.66	0.079	2.01	5.257	23.38	0.257	6.53	0.032	0.81	8	316 SS CG P
0.180	4.57	60777S	0.500	12.70	0.116	2.95	54.150	9.48	0.097	2.46	5.257	23.38	0.305	7.75	0.032	0.81	9.5	316 SS CG P
0.180	4.57	60778S	0.560	14.30	0.116	2.95	48.310	8.46	0.109	2.77	5.257	23.38	0.337	8.56	0.032	0.81	10.5	316 SS CG P
0.180	4.57	60779S	0.630	15.88	0.116	2.95	42.480	7.44	0.124	3.15	5.257	23.38	0.369	9.37	0.032	0.81	11.5	316 SS CG P
0.180	4.57	60780S	0.690	17.48	0.116	2.95	39.150	6.85	0.134	3.40	5.257	23.38	0.393	9.98	0.032	0.81	12.3	316 SS CG P
0.180	4.57	60781S	0.750	19.05	0.116	2.95	34.150	5.98	0.154	3.91	5.257	23.38	0.450	11.43	0.032	0.81	14.1	316 SS CG P
0.180	4.57	60782S	0.810	20.65	0.116	2.95	30.820	5.39	0.171	4.34	5.257	23.38	0.481	12.22	0.032	0.81	15	316 SS CG P
0.180	4.57	60783S	0.880	22.23	0.116	2.95	28.320	4.96</td										




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.180	4.57	60803S	1.130	28.58	0.110	2.79	33.520	5.87	0.204	5.18	6.828	30.37	0.734	18.64	0.035	0.89	21	316 SS	CG	P
0.180	4.57	60804S	1.250	31.75	0.110	2.79	29.970	5.25	0.228	5.79	6.828	30.37	0.812	20.62	0.035	0.89	23.2	316 SS	CG	P
0.180	4.57	60805S	1.380	34.93	0.110	2.79	27.100	4.74	0.252	6.40	6.828	30.37	0.890	22.61	0.035	0.89	25.4	316 SS	CG	P
0.180	4.57	60806S	1.500	38.10	0.110	2.79	24.730	4.33	0.276	7.01	6.828	30.37	0.969	24.61	0.035	0.89	27.6	316 SS	CG	P
0.180	4.57	60807S	1.750	44.45	0.110	2.79	21.050	3.68	0.324	8.23	6.828	30.37	1.125	28.58	0.035	0.89	32.1	316 SS	CG	P
0.180	4.57	60808S	2.000	50.80	0.110	2.79	18.330	3.21	0.373	9.47	6.828	30.37	1.282	32.56	0.035	0.89	36.6	316 SS	CG	P
0.180	4.57	60809S	2.250	57.15	0.110	2.79	16.220	2.84	0.421	10.69	6.828	30.37	1.439	36.55	0.035	0.89	41.1	316 SS	CG	P
0.180	4.57	61013S	0.250	6.35	0.144	3.65	11.200	1.96	0.091	2.31	1.019	4.53	0.086	2.18	0.018	0.46	4.8	316 SS	CG	P
0.180	4.57	61014S	0.310	7.95	0.144	3.65	9.200	1.61	0.111	2.81	1.021	4.54	0.100	2.54	0.018	0.46	5.4	316 SS	CG	P
0.180	4.57	61015S	0.380	9.53	0.144	3.65	7.500	1.31	0.136	3.45	1.020	4.53	0.114	2.90	0.018	0.46	6.1	316 SS	CG	P
0.180	4.57	61016S	0.440	11.13	0.144	3.65	6.700	1.17	0.152	3.86	1.018	4.52	0.123	3.12	0.018	0.46	6.6	316 SS	CG	P
0.180	4.57	61017S	0.500	12.70	0.144	3.65	5.800	1.02	0.176	4.46	1.021	4.54	0.132	3.35	0.018	0.46	7.3	316 SS	CG	P
0.180	4.57	61018S	0.560	14.30	0.144	3.65	5.000	0.88	0.204	5.17	1.020	4.53	0.150	3.81	0.018	0.46	8.2	316 SS	CG	P
0.180	4.57	61019S	0.630	15.88	0.144	3.65	4.200	0.74	0.243	6.16	1.021	4.54	0.172	4.37	0.018	0.46	9.4	316 SS	CG	P
0.180	4.57	61020S	0.690	17.48	0.144	3.65	3.700	0.65	0.276	6.99	1.021	4.54	0.186	4.72	0.018	0.46	10.3	316 SS	CG	P
0.180	4.57	61021S	0.750	19.05	0.144	3.65	3.300	0.58	0.309	7.84	1.020	4.53	0.199	5.05	0.018	0.46	11.4	316 SS	CG	P
0.180	4.57	61022S	0.880	22.23	0.144	3.65	3.000	0.53	0.340	8.63	1.020	4.53	0.221	5.61	0.018	0.46	12.3	316 SS	CG	P
0.180	4.57	61023S	1.000	25.40	0.144	3.65	2.600	0.46	0.392	9.96	1.019	4.53	0.256	6.50	0.018	0.46	13.9	316 SS	CG	P
0.180	4.57	61024S	1.250	31.75	0.144	3.65	2.100	0.37	0.486	12.32	1.021	4.54	0.302	7.67	0.018	0.46	16.7	316 SS	CG	P
0.180	4.57	61025S	1.380	34.93	0.144	3.65	1.900	0.33	0.537	13.61	1.020	4.53	0.338	8.59	0.018	0.46	18.2	316 SS	CG	P
0.180	4.57	61026S	1.500	38.10	0.144	3.65	1.700	0.30	0.600	15.21	1.020	4.53	0.374	9.50	0.018	0.46	20.2	316 SS	CG	P
0.180	4.57	61027S	1.750	44.45	0.144	3.65	1.400	0.25	0.729	18.50	1.021	4.54	0.442	11.23	0.018	0.46	24.1	316 SS	CG	P
0.180	4.57	61119S	0.250	6.35	0.140	3.55	17.500	3.07	0.079	2.00	1.383	6.15	0.107	2.72	0.020	0.51	4.8	316 SS	CG	P
0.180	4.57	61120S	0.310	7.95	0.140	3.55	13.300	2.33	0.104	2.64	1.383	6.15	0.125	3.18	0.020	0.51	5.7	316 SS	CG	P
0.180	4.57	61121S	0.380	9.53	0.140	3.55	10.600	1.86	0.130	3.31	1.378	6.12	0.144	3.66	0.020	0.51	6.6	316 SS	CG	P
0.180	4.57	61122S	0.440	11.13	0.140	3.55	9.200	1.61	0.150	3.81	1.380	6.13	0.160	4.06	0.020	0.51	7.3	316 SS	CG	P
0.180	4.57	61123S	0.500	12.70	0.140	3.55	7.700	1.35	0.179	4.55	1.378	6.12	0.180	4.57	0.020	0.51	8.3	316 SS	CG	P
0.180	4.57	61124S	0.560	14.30	0.140	3.55	6.900	1.21	0.200	5.08	1.380	6.13	0.196	4.98	0.020	0.51	9.1	316 SS	CG	P
0.180	4.57	61125S	0.630	15.88	0.140	3.55	6.000	1.05	0.230	5.84	1.380	6.13	0.214	5.44	0.020	0.51	10.1	316 SS	CG	P
0.180	4.57	61126S	0.690	17.48	0.140	3.55	5.400	0.95	0.256	6.49	1.382	6.14	0.234	5.94	0.020	0.51	11	316 SS	CG	P
0.180	4.57	61127S	0.750	19.05	0.140	3.55	5.000	0.88	0.276	7.01	1.380	6.13	0.250	6.35	0.020	0.51	11.8	316 SS	CG	P
0.180	4.57	61128S	0.880	22.23	0.140	3.55	4.200	0.74	0.329	8.34	1.382	6.14	0.285	7.24	0.020	0.51	13.6	316 SS	CG	P
0.180	4.57	61129S	1.000	25.40	0.140	3.55	3.700	0.65	0.373	9.47	1.380	6.13	0.315	8.00	0.020	0.51	15.2	316 SS	CG	P
0.180	4.57	61130S	1.250	31.75	0.140	3.55	2.900	0.51	0.476	12.08	1.380	6.13	0.385	9.78	0.020	0.51	18.8	316 SS	CG	P
0.180	4.57	61131S	1.380	34.93	0.140	3.55	2.700	0.47	0.511	12.98	1.380	6.13	0.420	10.67	0.020	0.51	20.1	316 SS	CG	P
0.180	4.57	61132S	1.500	38.10	0.140	3.55	2.400	0.42	0.575	14.61	1.380	6.13	0.450	11.43	0.020	0.51	22.4	316 SS	CG	P
0.180	4.57	61133S	1.750	44.45	0.140	3.55	2.000	0.35	0.691	17.54	1.382	6.14	0.530	13.46	0.020	0.51	26.4	316 SS	CG	P
0.180	4.57	61239S	0.250	6.35	0.136	3.45	25.000	4.38	0.073	1.84	1.825	8.11	0.111	2.82	0.022	0.56	5	316 SS	CG	P
0.180	4.57	61240S	0.310	7.95	0.136	3.45	20.000	3.50	0.091	2.30	1.820	8.09	0.128	3.25	0.022	0.56	5.7	316 SS	CG	P
0.180	4.57	61241S	0.380	9.53	0.136	3.45	16.700	2.93	0.109	2.76	1.820	8.09	0.144	3.66	0.022	0.56	6.5	316 SS	CG	P
0.180	4.57	61242S	0.440	11.13	0.136	3.45	14.200	2.49	0.128	3.25	1.818	8.08	0.161	4.09	0.022	0.56	7.2	316 SS	CG	P
0.180	4.57	61243S	0.500	12.70	0.136	3.45	11.700	2.05	0.155	3.94	1.814	8.06	0.188	4.78	0.022	0.56	8.4	316 SS	CG	P
0.180	4.57	61244S	0.560	14.30	0.136	3.45	10.000	1.75	0.182	4.61	1.820	8.09	0.210	5.33	0.022	0.56	9.4	316 SS	CG	P
0.180	4.57	61245S	0.630	15.88	0.136	3.45	8.700	1.52	0.209	5.30	1.818	8.08	0.238	6.05	0.022	0.56	10.5	316 SS	CG	P
0.180	4.57	61246S	0.690	17.48	0.136	3.45	7.900	1.38	0.230	5.83	1.817	8.08	0.260	6.60	0.022	0.56	11.4	316 SS	CG	P
0.180	4.57	61247S	0.750	19.05	0.136	3.45	7.100	1.24	0.256	6.49	1.818	8.08	0.287	7.29	0.022	0.56	12.5	316 SS	CG	P
0.180	4.57	61248S	0.810	20.65	0.136	3.45	6.200	1.09	0.293	7.43	1.817	8.08	0.310	7.87	0.022	0.56	14	316 SS	CG	P
0.180	4.57	61249S	0.940	23.83	0.136	3.45	5.600	0.98	0.324	8.23	1.814	8.06	0.346	8.79	0.022	0.56	15.3	316 SS	CG	P
0.180	4.57	61250S	1.000	25.40	0.136	3.45	5.200	0.91	0.349	8.86	1.815	8.07	0.368	9.35	0.022	0.56	16.3	316 SS	CG	P
0.180	4.57	61251S	1.130	28.58	0.136	3.45	4.600	0.81	0.395	10.02	1.817	8.08	0.403	10.24	0.022	0.56	18.1	316 SS	CG	P
0.180	4.57	61252S	1.250	31.75	0.136	3.45	4.200	0.74	0.432	10.97	1.814	8.06	0.446	11.33	0.022	0.56	19.7	316 SS	CG	P
0.180	4.57	61253S	1.500	38.10	0.136	3.45	3.400	0.60	0.534	13.57	1.816	8.07	0.527	13.39	0.022	0.56	23.8	316 SS	CG	P
0.180	4.57	61254S	1.750	44.45	0.136	3.45	2.900	0.51	0.626	15.89	1.815	8.07	0.620	15.75	0.022	0.56	27.6	316 SS	CG	P
0.180	4.57	61378S	0.250	6.35	0.132	3.35	36.700	6.43	0.064	1.61	2.349	10.44	0.130	3.30	0.024	0.61				




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	E N D S Mat'l	F n d s h									
0.180	4.57	61414S	0.690	17.48	0.128	3.25	15.800	2.77	0.186	4.71	2.939	13.06	0.313	7.95	0.026	0.66	11.9	316 SS	CG	P
0.180	4.57	61415S	0.750	19.05	0.128	3.25	14.200	2.49	0.206	5.24	2.925	13.00	0.345	8.76	0.026	0.66	13	316 SS	CG	P
0.180	4.57	61416S	0.810	20.65	0.128	3.25	13.300	2.33	0.220	5.59	2.926	13.00	0.365	9.27	0.026	0.66	13.8	316 SS	CG	P
0.180	4.57	61417S	0.880	22.23	0.128	3.25	12.500	2.19	0.234	5.95	2.925	13.00	0.391	9.93	0.026	0.66	14.5	316 SS	CG	P
0.180	4.57	61418S	1.000	25.40	0.128	3.25	10.200	1.79	0.287	7.29	2.927	13.01	0.453	11.51	0.026	0.66	17.3	316 SS	CG	P
0.180	4.57	61419S	1.130	28.58	0.128	3.25	9.000	1.58	0.326	8.27	2.934	13.04	0.512	13.00	0.026	0.66	19.4	316 SS	CG	P
0.180	4.57	61420S	1.250	31.75	0.128	3.25	8.100	1.42	0.362	9.18	2.932	13.03	0.552	14.02	0.026	0.66	21.3	316 SS	CG	P
0.180	4.57	61421S	1.500	38.10	0.128	3.25	6.700	1.17	0.437	11.11	2.928	13.01	0.680	17.27	0.026	0.66	25.3	316 SS	CG	P
0.180	4.57	61422S	1.750	44.45	0.128	3.25	5.700	1.00	0.514	13.05	2.930	13.02	0.766	19.46	0.026	0.66	29.4	316 SS	CG	P
0.180	4.57	61423S	2.000	50.80	0.128	3.25	5.000	0.88	0.586	14.87	2.930	13.02	0.871	22.12	0.026	0.66	33.3	316 SS	CG	P
0.180	4.57	61575S	0.250	6.35	0.122	3.09	81.500	14.27	0.050	1.27	4.075	18.11	0.159	4.04	0.029	0.74	5.2	316 SS	CG	P
0.180	4.57	61576S	0.310	7.95	0.122	3.09	63.300	11.09	0.065	1.64	4.115	18.29	0.187	4.75	0.029	0.74	6.1	316 SS	CG	P
0.180	4.57	61577S	0.380	9.53	0.122	3.09	50.800	8.90	0.080	2.04	4.064	18.06	0.220	5.59	0.029	0.74	7.1	316 SS	CG	P
0.180	4.57	61578S	0.440	11.13	0.122	3.09	41.700	7.30	0.098	2.49	4.087	18.16	0.249	6.32	0.029	0.74	8.2	316 SS	CG	P
0.180	4.57	61579S	0.500	12.70	0.122	3.09	35.800	6.27	0.114	2.89	4.081	18.14	0.280	7.11	0.029	0.74	9.2	316 SS	CG	P
0.180	4.57	61580S	0.560	14.30	0.122	3.09	31.200	5.46	0.131	3.32	4.087	18.16	0.315	8.00	0.029	0.74	10.2	316 SS	CG	P
0.180	4.57	61581S	0.630	15.88	0.122	3.09	27.500	4.82	0.148	3.77	4.070	18.09	0.344	8.74	0.029	0.74	11.3	316 SS	CG	P
0.180	4.57	61582S	0.690	17.48	0.122	3.09	25.000	4.38	0.163	4.15	4.075	18.11	0.372	9.45	0.029	0.74	12.3	316 SS	CG	P
0.180	4.57	61583S	0.750	19.05	0.122	3.09	22.500	3.94	0.181	4.61	4.073	18.10	0.410	10.41	0.029	0.74	13.4	316 SS	CG	P
0.180	4.57	61584S	0.810	20.65	0.122	3.09	20.800	3.64	0.196	4.98	4.077	18.12	0.437	11.10	0.029	0.74	14.4	316 SS	CG	P
0.180	4.57	61585S	0.880	22.23	0.122	3.09	19.200	3.36	0.213	5.40	4.090	18.18	0.468	11.89	0.029	0.74	15.4	316 SS	CG	P
0.180	4.57	61586S	0.940	23.83	0.122	3.09	17.700	3.10	0.231	5.85	4.089	18.17	0.502	12.75	0.029	0.74	16.5	316 SS	CG	P
0.180	4.57	61587S	1.000	25.40	0.122	3.09	16.200	2.84	0.252	6.40	4.082	18.14	0.532	13.51	0.029	0.74	17.9	316 SS	CG	P
0.180	4.57	61588S	1.130	28.58	0.122	3.09	14.600	2.56	0.280	7.10	4.088	18.17	0.590	14.99	0.029	0.74	19.6	316 SS	CG	P
0.180	4.57	61589S	1.250	31.75	0.122	3.09	12.900	2.26	0.317	8.03	4.089	18.17	0.647	16.43	0.029	0.74	21.9	316 SS	CG	P
0.180	4.57	61590S	1.380	34.93	0.122	3.09	11.700	2.05	0.349	8.86	4.083	18.15	0.715	18.16	0.029	0.74	24	316 SS	CG	P
0.180	4.57	61591S	1.500	38.10	0.122	3.09	10.600	1.86	0.385	9.78	4.081	18.14	0.770	19.56	0.029	0.74	26.2	316 SS	CG	P
0.180	4.57	61592S	1.750	44.45	0.122	3.09	9.000	1.58	0.454	11.51	4.086	18.16	0.885	22.48	0.029	0.74	30.5	316 SS	CG	P
0.180	4.57	61593S	2.000	50.80	0.122	3.09	7.900	1.38	0.517	13.11	4.084	18.15	1.015	25.78	0.029	0.74	34.5	316 SS	CG	P
0.180	4.57	61657S	0.310	7.95	0.116	2.95	101.600	17.79	0.052	1.32	5.283	23.48	0.193	4.90	0.032	0.81	6	316 SS	CG	P
0.180	4.57	61658S	0.380	9.53	0.116	2.95	79.100	13.85	0.067	1.70	5.300	23.56	0.233	5.92	0.032	0.81	7.1	316 SS	CG	P
0.180	4.57	61659S	0.440	11.13	0.116	2.95	66.600	11.66	0.079	2.01	5.261	23.38	0.257	6.53	0.032	0.81	8.1	316 SS	CG	P
0.180	4.57	61660S	0.500	12.70	0.116	2.95	54.100	9.48	0.098	2.48	5.302	23.56	0.305	7.75	0.032	0.81	9.5	316 SS	CG	P
0.180	4.57	61661S	0.560	14.30	0.116	2.95	48.300	8.46	0.109	2.78	5.265	23.40	0.337	8.56	0.032	0.81	10.4	316 SS	CG	P
0.180	4.57	61662S	0.630	15.88	0.116	2.95	42.500	7.44	0.124	3.16	5.270	23.42	0.369	9.37	0.032	0.81	11.5	316 SS	CG	P
0.180	4.57	61663S	0.690	17.48	0.116	2.95	39.200	6.87	0.135	3.42	5.292	23.52	0.393	9.98	0.032	0.81	12.3	316 SS	CG	P
0.180	4.57	61664S	0.750	19.05	0.116	2.95	34.200	5.99	0.155	3.92	5.301	23.56	0.450	11.43	0.032	0.81	13.8	316 SS	CG	P
0.180	4.57	61665S	0.810	20.65	0.116	2.95	30.800	5.39	0.172	4.36	5.298	23.55	0.481	12.22	0.032	0.81	15.1	316 SS	CG	P
0.180	4.57	61666S	0.880	22.23	0.116	2.95	28.300	4.96	0.187	4.74	5.292	23.52	0.530	13.46	0.032	0.81	16.3	316 SS	CG	P
0.180	4.57	61667S	0.940	23.83	0.116	2.95	26.700	4.68	0.198	5.02	5.287	23.50	0.561	14.25	0.032	0.81	17.1	316 SS	CG	P
0.180	4.57	61668S	1.000	25.40	0.116	2.95	24.200	4.24	0.218	5.54	5.276	23.45	0.601	15.27	0.032	0.81	18.7	316 SS	CG	P
0.180	4.57	61669S	1.130	28.58	0.116	2.95	21.700	3.80	0.244	6.18	5.295	23.53	0.674	17.12	0.032	0.81	20.6	316 SS	CG	P
0.180	4.57	61670S	1.250	31.75	0.116	2.95	19.600	3.43	0.270	6.84	5.292	23.52	0.739	18.77	0.032	0.81	22.6	316 SS	CG	P
0.180	4.57	61671S	1.380	34.93	0.116	2.95	17.500	3.07	0.302	7.66	5.285	23.49	0.819	20.80	0.032	0.81	25.1	316 SS	CG	P
0.180	4.57	61672S	1.500	38.10	0.116	2.95	16.200	2.84	0.326	8.28	5.281	23.47	0.877	22.28	0.032	0.81	27	316 SS	CG	P
0.180	4.57	61673S	1.750	44.45	0.116	2.95	13.700	2.40	0.386	9.79	5.288	23.50	0.994	25.25	0.032	0.81	31.5	316 SS	CG	P
0.180	4.57	61674S	2.000	50.80	0.116	2.95	11.800	2.07	0.448	11.37	5.286	23.49	1.181	30.00	0.032	0.81	36.3	316 SS	CG	P
0.180	4.57	61763S	0.380	9.53	0.110	2.79	116.000	20.32	0.060	1.51	6.960	30.93	0.263	6.68	0.035	0.89	7.3	316 SS	CG	P
0.180	4.57	61764S	0.440	11.13	0.110	2.79	96.000	16.81	0.072	1.83	6.912	30.72	0.303	7.70	0.035	0.89	8.4	316 SS	CG	P
0.180	4.57	61765S	0.500	12.70	0.110	2.79	82.200	14.40	0.084	2.13	6.905	30.69	0.342	8.69	0.035	0.89	9.5	316 SS	CG	P
0.180	4.57	61766S	0.560	14.30	0.110	2.79	71.700	12.56	0.096	2.45	6.883	30.59	0.381	9.68	0.035	0.89	10.6	316 SS	CG	P
0.180	4.57	61767S	0.630	15.88	0.110	2.79	63.700	11.16	0.109	2.75	6.943	30.86	0.420	10.67	0.035	0.89	11.7	316 SS	CG	P
0.180	4.57	61768S	0.690	17.48	0.110	2.79	57.200	10.02	0.121	3.07	6.921	30.76	0.460	11.68	0.035	0.89	12.8	316 SS	CG	P
0.180	4.57	61769S	0.750	19.0																




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends E F nsh									
0.188	4.78	66522S	0.250	6.35	0.148	3.76	16.872	2.95	0.078	1.98	1.316	5.85	0.090	2.29	0.020	0.51	4.5	316 SS	CG	P
0.188	4.78	66523S	0.250	6.35	0.136	3.45	44.785	7.84	0.063	1.60	2.821	12.55	0.156	3.96	0.026	0.66	5	316 SS	C	P
0.188	4.78	66524S	0.250	6.35	0.158	4.01	6.111	1.07	0.094	2.39	0.574	2.55	0.075	1.91	0.015	0.38	4	316 SS	C	P
0.188	4.78	66525S	0.250	6.35	0.136	3.45	53.743	9.41	0.052	1.32	2.795	12.43	0.143	3.63	0.026	0.66	4.5	316 SS	C	P
0.188	4.78	66526S	0.250	6.35	0.136	3.45	134.356	23.51	0.021	0.53	2.821	12.55	0.104	2.64	0.026	0.66	3	316 SS	C	P
0.188	4.78	66527S	0.280	7.11	0.138	3.51	32.214	5.64	0.078	1.98	2.513	11.18	0.163	4.14	0.025	0.64	5.5	316 SS	C	P
0.188	4.78	66528S	0.280	7.11	0.154	3.91	6.960	1.22	0.117	2.97	0.814	3.62	0.102	2.59	0.017	0.43	5	316 SS	C	P
0.188	4.78	66529S	0.310	7.87	0.158	4.01	2.444	0.43	0.190	4.83	0.464	2.06	0.120	3.05	0.015	0.38	7	316 SS	C	P
0.188	4.78	66530S	0.310	7.87	0.128	3.25	102.680	17.97	0.042	1.07	4.313	19.18	0.165	4.19	0.030	0.76	4.5	316 SS	C	P
0.188	4.78	66531S	0.310	7.87	0.148	3.76	16.872	2.95	0.078	1.98	1.316	5.85	0.110	2.79	0.020	0.51	4.5	316 SS	C	P
0.188	4.78	66532S	0.310	7.87	0.172	4.37	0.195	0.03	0.250	6.35	0.049	0.22	0.060	1.52	0.008	0.20	6.5	316 SS	C	P
0.188	4.78	66533S	0.310	7.87	0.172	4.37	0.185	0.03	0.248	6.30	0.046	0.21	0.062	1.58	0.008	0.20	6.8	316 SS	C	P
0.188	4.78	66534S	0.310	7.87	0.158	4.01	3.055	0.54	0.187	4.75	0.571	2.54	0.105	2.67	0.015	0.38	6	316 SS	C	P
0.188	4.78	66535S	0.310	7.87	0.148	3.76	8.436	1.48	0.155	3.94	1.308	5.82	0.140	3.56	0.020	0.51	7	316 SS	CG	P
0.188	4.78	66536S	0.310	7.87	0.144	3.66	16.004	2.80	0.108	2.74	1.728	7.69	0.132	3.35	0.022	0.56	6	316 SS	CG	P
0.188	4.78	66537S	0.340	8.64	0.136	3.45	33.589	5.88	0.084	2.13	2.821	12.55	0.182	4.62	0.026	0.66	6	316 SS	C	P
0.188	4.78	66538S	0.380	9.65	0.140	3.56	19.794	3.46	0.113	2.87	2.237	9.95	0.186	4.72	0.024	0.61	6.8	316 SS	C	P
0.188	4.78	66539S	0.380	9.65	0.144	3.66	21.338	3.73	0.081	2.06	1.728	7.69	0.132	3.35	0.022	0.56	5	316 SS	C	P
0.188	4.78	66540S	0.380	9.65	0.124	3.15	86.313	15.11	0.060	1.52	5.179	23.04	0.224	5.69	0.032	0.81	6	316 SS	C	P
0.188	4.78	66541S	0.380	9.65	0.152	3.86	7.122	1.25	0.135	3.43	0.961	4.28	0.104	2.64	0.018	0.46	5.8	316 SS	CG	P
0.188	4.78	66542S	0.380	9.65	0.140	3.56	19.794	3.46	0.113	2.87	2.237	9.95	0.162	4.12	0.024	0.61	6.8	316 SS	CG	P
0.188	4.78	66543S	0.380	9.65	0.136	3.45	28.286	4.95	0.100	2.54	2.829	12.58	0.202	5.13	0.026	0.66	6.8	316 SS	C	P
0.188	4.78	66544S	0.380	9.65	0.156	3.96	4.025	0.70	0.169	4.29	0.680	3.03	0.112	2.85	0.016	0.41	6	316 SS	C	P
0.188	4.78	66545S	0.380	9.65	0.148	3.76	9.373	1.64	0.140	3.56	1.312	5.84	0.130	3.30	0.020	0.51	6.5	316 SS	CG	P
0.188	4.78	66546S	0.380	9.65	0.164	4.17	0.951	0.17	0.284	7.21	0.270	1.20	0.096	2.44	0.012	0.31	7	316 SS	C	P
0.188	4.78	66547S	0.380	9.65	0.146	3.71	17.399	3.05	0.087	2.21	1.514	6.73	0.126	3.20	0.021	0.53	5	316 SS	C	P
0.188	4.78	66548S	0.410	10.41	0.164	4.17	0.951	0.17	0.310	7.87	0.295	1.31	0.096	2.44	0.012	0.31	7	316 SS	C	P
0.188	4.78	66549S	0.410	10.41	0.132	3.35	37.516	6.57	0.093	2.36	3.489	15.52	0.224	5.69	0.028	0.71	7	316 SS	C	P
0.188	4.78	66550S	0.410	10.41	0.144	3.66	9.145	1.60	0.189	4.80	1.728	7.69	0.220	5.59	0.022	0.56	9	316 SS	C	P
0.188	4.78	66551S	0.410	10.41	0.132	3.35	57.716	10.10	0.061	1.55	3.521	15.66	0.147	3.73	0.028	0.71	5.3	316 SS	CG	P
0.188	4.78	66552S	0.410	10.41	0.138	3.51	37.583	6.58	0.067	1.70	2.518	11.20	0.150	3.81	0.025	0.64	5	316 SS	C	P
0.188	4.78	66553S	0.410	10.41	0.132	3.35	31.263	5.47	0.112	2.85	3.501	15.57	0.224	5.69	0.028	0.71	8	316 SS	CG	P
0.188	4.78	66554S	0.410	10.41	0.140	3.56	22.123	3.87	0.101	2.57	2.234	9.94	0.174	4.42	0.024	0.61	6.3	316 SS	C	P
0.188	4.78	66555S	0.410	10.41	0.148	3.76	6.026	1.06	0.210	5.33	1.265	5.63	0.200	5.08	0.020	0.51	9	316 SS	C	P
0.188	4.78	66556S	0.410	10.41	0.160	4.06	3.038	0.53	0.153	3.89	0.465	2.07	0.084	2.13	0.014	0.36	5	316 SS	C	P
0.188	4.78	66557S	0.440	11.18	0.162	4.12	1.332	0.23	0.281	7.14	0.374	1.66	0.104	2.64	0.013	0.33	7	316 SS	C	P
0.188	4.78	66558S	0.440	11.18	0.140	3.56	10.684	1.87	0.157	3.99	1.677	7.46	0.283	7.19	0.024	0.61	10.8	316 SS	C	P
0.188	4.78	66559S	0.440	11.18	0.138	3.51	18.791	3.29	0.134	3.40	2.518	11.20	0.225	5.72	0.025	0.64	8	316 SS	C	P
0.188	4.78	66560S	0.440	11.18	0.128	3.25	36.671	6.42	0.117	2.97	4.291	19.09	0.270	6.86	0.030	0.76	9	316 SS	CG	P
0.188	4.78	66561S	0.440	11.18	0.152	3.86	5.342	0.94	0.180	4.57	0.962	4.28	0.144	3.66	0.018	0.46	7	316 SS	C	P
0.188	4.78	66562S	0.470	11.94	0.148	3.76	9.373	1.64	0.140	3.56	1.312	5.84	0.150	3.81	0.020	0.51	6.5	316 SS	C	P
0.188	4.78	66563S	0.470	11.94	0.138	3.51	22.550	3.95	0.112	2.85	2.526	11.24	0.200	5.08	0.025	0.64	7	316 SS	C	P
0.188	4.78	66564S	0.470	11.94	0.148	3.76	8.436	1.48	0.155	3.94	1.308	5.82	0.160	4.06	0.020	0.51	7	316 SS	C	P
0.188	4.78	66565S	0.470	11.94	0.136	3.45	22.393	3.92	0.126	3.20	2.822	12.55	0.234	5.94	0.026	0.66	8	316 SS	C	P
0.188	4.78	66566S	0.470	11.94	0.140	3.56	18.804	3.29	0.119	3.02	2.238	9.96	0.192	4.88	0.024	0.61	7	316 SS	C	P
0.188	4.78	66567S	0.500	12.70	0.144	3.66	7.113	1.25	0.243	6.17	1.728	7.69	0.242	6.15	0.022	0.56	11	316 SS	CG	P
0.188	4.78	66568S	0.500	12.70	0.154	3.91	1.989	0.35	0.270	6.86	0.537	2.39	0.230	5.84	0.017	0.43	12.5	316 SS	C	P
0.188	4.78	66569S	0.500	12.70	0.138	3.51	22.550	3.95	0.112	2.85	2.526	11.24	0.200	5.08	0.025	0.64	7	316 SS	C	P
0.188	4.78	66570S	0.500	12.70	0.132	3.35	28.858	5.05	0.121	3.07	3.492	15.53	0.266	6.76	0.028	0.71	8.5	316 SS	C	P
0.188	4.78	66571S	0.500	12.70	0.140	3.56	11.753	2.06	0.190	4.83	2.233	9.93	0.264	6.71	0.024	0.61	10	316 SS	C	P
0.188	4.78	66572S	0.500	12.70	0.144	3.66	10.242	1.79	0.169	4.29	1.731	7.70	0.182	4.62	0.022	0.56	8.3	316 SS	CG	P
0.188	4.78	66573S	0.500	12.70	0.148	3.76	7.030	1.23	0.186	4.72	1.308	5.82	0.180	4.57	0.020	0.51	8	316 SS	C	P
0.188	4.78	66574S	0.500	12.70	0.158	4.01	2.444	0.43	0.234	5.94	0.572	2.54	0.120	3.05	0.015	0.38	7	316 SS	C	P
0.188	4.78	66575S	0.500	12.70	0.126	3.20	41.145	7.20	0.114	2.90	4.691	20.87	0.287	7.29	0.031	0.79	9.3	316 SS	CG	P
0.188	4.78	66576S	0.500	12.70	0.138	3.51	16.703	2.92</td												




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm		Wire Dia. Inches mm		Total Coils	Mat'l	E n d s	F in sh	
0.188	4.78	66598S	0.590	14.99	0.146	3.71	5.220	0.91	0.289	7.34	1.509	6.71	0.252	6.40	0.021	0.53	12	316 SS CG P
0.188	4.78	66599S	0.590	14.99	0.132	3.35	18.758	3.28	0.186	4.72	3.489	15.52	0.336	8.53	0.028	0.71	12	316 SS CG P
0.188	4.78	66600S	0.590	14.99	0.138	3.51	13.584	2.38	0.185	4.70	2.513	11.18	0.283	7.19	0.025	0.64	10.3	316 SS C P
0.188	4.78	66601S	0.590	14.99	0.160	4.06	0.912	0.16	0.408	10.36	0.372	1.66	0.182	4.62	0.014	0.36	12	316 SS C P
0.188	4.78	66602S	0.590	14.99	0.152	3.86	5.342	0.94	0.180	4.57	0.962	4.28	0.144	3.66	0.018	0.46	7	316 SS C P
0.188	4.78	66603S	0.590	14.99	0.160	4.06	1.519	0.27	0.307	7.80	0.466	2.07	0.112	2.85	0.014	0.36	8	316 SS CG P
0.188	4.78	66604S	0.630	16.00	0.140	3.56	12.968	2.27	0.172	4.37	2.230	9.92	0.246	6.25	0.024	0.61	9.3	316 SS C P
0.188	4.78	66605S	0.630	16.00	0.128	3.25	28.522	4.99	0.150	3.81	4.278	19.03	0.360	9.14	0.030	0.76	11	316 SS C P
0.188	4.78	66606S	0.630	16.00	0.148	3.76	7.030	1.23	0.186	4.72	1.308	5.82	0.160	4.06	0.020	0.51	8	316 SS CG P
0.188	4.78	66607S	0.630	16.00	0.138	3.51	10.250	1.79	0.245	6.22	2.511	11.17	0.350	8.89	0.025	0.64	13	316 SS C P
0.188	4.78	66608S	0.630	16.00	0.158	4.01	1.509	0.26	0.379	9.63	0.572	2.54	0.152	3.86	0.015	0.38	10.1	316 SS CG P
0.188	4.78	66609S	0.630	16.00	0.144	3.66	5.335	0.93	0.300	7.62	1.601	7.12	0.330	8.38	0.022	0.56	14	316 SS C P
0.188	4.78	66610S	0.630	16.00	0.136	3.45	12.214	2.14	0.231	5.87	2.821	12.55	0.364	9.25	0.026	0.66	13	316 SS C P
0.188	4.78	66611S	0.660	16.76	0.136	3.45	15.268	2.67	0.185	4.70	2.825	12.57	0.307	7.80	0.026	0.66	10.8	316 SS C P
0.188	4.78	66612S	0.660	16.76	0.140	3.56	11.061	1.94	0.202	5.13	2.234	9.94	0.252	6.40	0.024	0.61	10.5	316 SS CG P
0.188	4.78	66613S	0.660	16.76	0.148	3.76	7.030	1.23	0.186	4.72	1.308	5.82	0.180	4.57	0.020	0.51	8	316 SS C P
0.188	4.78	66614S	0.690	17.53	0.124	3.15	38.361	6.71	0.134	3.40	5.140	22.86	0.384	9.75	0.032	0.81	11	316 SS C P
0.188	4.78	66615S	0.690	17.53	0.132	3.35	19.141	3.35	0.183	4.65	3.503	15.58	0.330	8.38	0.028	0.71	11.8	316 SS CG P
0.188	4.78	66616S	0.690	17.53	0.120	3.05	50.818	8.89	0.120	3.05	6.098	27.12	0.408	10.36	0.034	0.86	11	316 SS C P
0.188	4.78	66617S	0.690	17.53	0.152	3.86	3.339	0.58	0.288	7.32	0.962	4.28	0.198	5.03	0.018	0.46	10	316 SS C P
0.188	4.78	66618S	0.690	17.53	0.130	3.30	23.650	4.14	0.164	4.17	3.879	17.25	0.328	8.33	0.029	0.74	11.3	316 SS CG P
0.188	4.78	66619S	0.690	17.53	0.140	3.56	10.447	1.83	0.214	5.44	2.236	9.95	0.264	6.71	0.024	0.61	11	316 SS CG P
0.188	4.78	66620S	0.690	17.53	0.148	3.76	3.295	0.58	0.394	10.01	1.298	5.77	0.296	7.52	0.020	0.51	14.8	316 SS CG P
0.188	4.78	66621S	0.690	17.53	0.148	3.76	4.218	0.74	0.310	7.87	1.308	5.82	0.260	6.60	0.020	0.51	12	316 SS C P
0.188	4.78	66622S	0.690	17.53	0.148	3.76	5.272	0.92	0.248	6.30	1.307	5.81	0.200	5.08	0.020	0.51	10	316 SS CG P
0.188	4.78	66623S	0.690	17.53	0.138	3.51	18.791	3.29	0.134	3.40	2.518	11.20	0.225	5.72	0.025	0.64	8	316 SS C P
0.188	4.78	66624S	0.690	17.53	0.158	4.01	1.358	0.24	0.421	10.69	0.572	2.54	0.180	4.57	0.015	0.38	11	316 SS C P
0.188	4.78	66625S	0.720	18.29	0.148	3.76	4.218	0.74	0.310	7.87	1.308	5.82	0.260	6.60	0.020	0.51	12	316 SS C P
0.188	4.78	66626S	0.720	18.29	0.156	3.96	1.464	0.26	0.464	11.79	0.679	3.02	0.224	5.69	0.016	0.41	13	316 SS C P
0.188	4.78	66627S	0.720	18.29	0.158	4.01	1.528	0.27	0.374	9.50	0.571	2.54	0.165	4.19	0.015	0.38	10	316 SS C P
0.188	4.78	66628S	0.720	18.29	0.136	3.45	13.436	2.35	0.210	5.33	2.822	12.55	0.338	8.59	0.026	0.66	12	316 SS C P
0.188	4.78	66629S	0.750	19.05	0.152	3.86	3.142	0.55	0.306	7.77	0.961	4.28	0.207	5.26	0.018	0.46	10.5	316 SS C P
0.188	4.78	66630S	0.750	19.05	0.154	3.91	2.320	0.41	0.350	8.89	0.812	3.61	0.204	5.18	0.017	0.43	11	316 SS C P
0.188	4.78	66631S	0.750	19.05	0.138	3.51	10.250	1.79	0.245	6.22	2.511	11.17	0.325	8.26	0.025	0.64	13	316 SS CG P
0.188	4.78	66632S	0.750	19.05	0.144	3.66	6.401	1.12	0.270	6.86	1.728	7.69	0.264	6.71	0.022	0.56	12	316 SS CG P
0.188	4.78	66633S	0.750	19.05	0.144	3.66	6.738	1.18	0.257	6.53	1.732	7.70	0.253	6.43	0.022	0.56	11.5	316 SS CG P
0.188	4.78	66634S	0.750	19.05	0.128	3.25	19.746	3.46	0.217	5.51	4.285	19.06	0.450	11.43	0.030	0.76	15	316 SS CG P
0.188	4.78	66635S	0.750	19.05	0.156	3.96	1.789	0.31	0.380	9.65	0.680	3.03	0.192	4.88	0.016	0.41	11	316 SS C P
0.188	4.78	66636S	0.780	19.81	0.168	4.27	0.255	0.05	0.663	16.84	0.169	0.75	0.117	2.97	0.010	0.25	10.7	316 SS C P
0.188	4.78	66637S	0.780	19.81	0.132	3.35	18.758	3.28	0.186	4.72	3.489	15.52	0.364	9.25	0.028	0.71	12	316 SS C P
0.188	4.78	66638S	0.780	19.81	0.136	3.45	12.214	2.14	0.231	5.87	2.821	12.55	0.364	9.25	0.026	0.66	13	316 SS C P
0.188	4.78	66639S	0.810	20.57	0.132	3.35	15.632	2.74	0.224	5.69	3.502	15.58	0.420	10.67	0.028	0.71	14	316 SS C P
0.188	4.78	66640S	0.810	20.57	0.136	3.45	8.957	1.57	0.315	8.00	2.821	12.55	0.468	11.89	0.026	0.66	17	316 SS C P
0.188	4.78	66641S	0.810	20.57	0.140	3.56	8.706	1.52	0.257	6.53	2.237	9.95	0.331	8.41	0.024	0.61	12.8	316 SS C P
0.188	4.78	66642S	0.810	20.57	0.138	3.51	20.500	3.59	0.123	3.12	2.522	11.22	0.188	4.78	0.025	0.64	7.5	316 SS CG P
0.188	4.78	66643S	0.840	21.34	0.138	3.51	9.978	1.75	0.252	6.40	2.514	11.18	0.358	9.09	0.025	0.64	13.3	316 SS C P
0.188	4.78	66644S	0.840	21.34	0.156	3.96	1.894	0.33	0.359	9.12	0.680	3.03	0.184	4.67	0.016	0.41	10.5	316 SS C P
0.188	4.78	66645S	0.840	21.34	0.136	3.45	11.196	1.96	0.252	6.40	2.821	12.55	0.390	9.91	0.026	0.66	14	316 SS C P
0.188	4.78	66646S	0.880	22.35	0.156	3.96	1.150	0.20	0.590	14.99	0.679	3.02	0.272	6.91	0.016	0.41	16	316 SS C P
0.188	4.78	66647S	0.880	22.35	0.136	3.45	10.497	1.84	0.268	6.81	2.813	12.51	0.385	9.78	0.026	0.66	14.8	316 SS CG P
0.188	4.78	66648S	0.880	22.35	0.152	3.86	3.035	0.53	0.316	8.03	0.959	4.27	0.212	5.39	0.018	0.46	10.8	316 SS C P
0.188	4.78	66649S	0.880	22.35	0.126	3.20	27.118	4.75	0.173	4.39	4.691	20.87	0.434	11.02	0.031	0.79	13	316 SS C P
0.188	4.78	66650S	0.910	23.11	0.154	3.91	2.610	0.46	0.311	7.90	0.812	3.61	0.170	4.32	0.017	0.43	10	316 SS CG P
0.188	4.78	66651S	0.910	23.11	0.138	3.51	7.047	1.23	0.357	9.07	2.516	11.19	0.475	12.07	0.025	0.64	18	316 SS C P
0.188	4.78	66652S	0.910	23.11	0.136	3.45	10.415	1.82	0.271	6.88	2.822	12.55	0.413	10.49	0.026	0.66	14.9	316 SS C P
0.188	4.78	66653S	0.910	23.11	0.138	3.51	9.166	1.60	0.274	6.96	2.511	11.17	0.383	9.73	0.025	0.64	14.3	




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends C P								
0.188	4.78	66674S	1.130	28.70	0.120	3.05	30.491	5.34	0.200	5.08	6.098	27.12	0.612	15.55	0.034	0.86	17	316 SS	C P
0.188	4.78	66675S	1.190	30.23	0.138	3.51	10.738	1.88	0.234	5.94	2.513	11.18	0.313	7.95	0.025	0.64	12.5	316 SS	CG P
0.188	4.78	66676S	1.220	30.99	0.156	3.96	1.238	0.22	0.548	13.92	0.678	3.02	0.256	6.50	0.016	0.41	15	316 SS	C P
0.188	4.78	66677S	1.220	30.99	0.128	3.25	13.510	2.36	0.317	8.05	4.283	19.05	0.630	16.00	0.030	0.76	21	316 SS	CG P
0.188	4.78	66678S	1.250	31.75	0.140	3.56	5.223	0.91	0.428	10.87	2.235	9.94	0.504	12.80	0.024	0.61	20	316 SS	C P
0.188	4.78	66679S	1.380	35.05	0.158	4.01	1.164	0.20	0.491	12.47	0.572	2.54	0.203	5.16	0.015	0.38	12.5	316 SS	C P
0.188	4.78	66680S	1.380	35.05	0.154	3.91	1.392	0.24	0.583	14.81	0.812	3.61	0.306	7.77	0.017	0.43	17	316 SS	C P
0.188	4.78	66681S	1.380	35.05	0.162	4.12	0.617	0.11	0.606	15.39	0.374	1.66	0.179	4.55	0.013	0.33	12.8	316 SS	C P
0.188	4.78	66682S	1.380	35.05	0.160	4.06	0.772	0.14	0.604	15.34	0.466	2.07	0.207	5.26	0.014	0.36	13.8	316 SS	C P
0.188	4.78	66683S	1.380	35.05	0.148	3.76	2.636	0.46	0.497	12.62	1.310	5.83	0.380	9.65	0.020	0.51	18	316 SS	C P
0.188	4.78	66684S	1.380	35.05	0.140	3.56	5.223	0.91	0.428	10.87	2.235	9.94	0.504	12.80	0.024	0.61	20	316 SS	C P
0.188	4.78	66685S	1.380	35.05	0.132	3.35	9.240	1.62	0.378	9.60	3.493	15.54	0.652	16.56	0.028	0.71	22.3	316 SS	C P
0.188	4.78	66686S	1.380	35.05	0.152	3.86	1.805	0.32	0.532	13.51	0.960	4.27	0.320	8.13	0.018	0.46	16.8	316 SS	C P
0.188	4.78	66687S	1.380	35.05	0.156	3.96	1.210	0.21	0.561	14.25	0.679	3.02	0.261	6.63	0.016	0.41	15.3	316 SS	C P
0.188	4.78	66688S	1.380	35.05	0.152	3.86	1.484	0.26	0.647	16.43	0.960	4.27	0.378	9.60	0.018	0.46	20	316 SS	C P
0.188	4.78	66689S	1.380	35.05	0.148	3.76	2.481	0.43	0.528	13.41	1.310	5.83	0.380	9.65	0.020	0.51	19	316 SS	CG P
0.188	4.78	66690S	1.380	35.05	0.148	3.76	2.343	0.41	0.559	14.20	1.310	5.83	0.400	10.16	0.020	0.51	20	316 SS	CG P
0.188	4.78	66691S	1.380	35.05	0.144	3.66	3.556	0.62	0.487	12.37	1.732	7.70	0.462	11.74	0.022	0.56	20	316 SS	C P
0.188	4.78	66692S	1.500	38.10	0.124	3.15	16.599	2.91	0.310	7.87	5.146	22.89	0.762	19.36	0.032	0.81	22.8	316 SS	C P
0.188	4.78	66693S	1.500	38.10	0.148	3.76	1.834	0.32	0.714	18.14	1.309	5.82	0.520	13.21	0.020	0.51	25	316 SS	C P
0.188	4.78	66694S	1.500	38.10	0.148	3.76	1.562	0.27	0.838	21.29	1.309	5.82	0.600	15.24	0.020	0.51	29	316 SS	C P
0.188	4.78	66695S	1.630	41.40	0.128	3.25	9.507	1.66	0.450	11.43	4.278	19.03	0.900	22.86	0.030	0.76	29	316 SS	C P
0.188	4.78	66696S	1.630	41.40	0.168	4.27	0.130	0.02	1.346	34.19	0.175	0.78	0.200	5.08	0.010	0.25	19	316 SS	C P
0.188	4.78	66697S	1.690	42.93	0.128	3.25	21.392	3.74	0.200	5.08	4.278	19.03	0.450	11.43	0.030	0.76	14	316 SS	C P
0.188	4.78	66698S	1.690	42.93	0.148	3.76	2.109	0.37	0.621	15.77	1.310	5.83	0.460	11.68	0.020	0.51	22	316 SS	C P
0.188	4.78	66699S	1.750	44.45	0.136	3.45	5.598	0.98	0.503	12.78	2.816	12.53	0.702	17.83	0.026	0.66	26	316 SS	C P
0.188	4.78	66700S	1.750	44.45	0.162	4.12	0.483	0.09	0.774	19.66	0.374	1.66	0.218	5.54	0.013	0.33	15.8	316 SS	C P
0.188	4.78	66701S	1.750	44.45	0.160	4.06	0.596	0.10	0.782	19.86	0.466	2.07	0.256	6.50	0.014	0.36	17.3	316 SS	C P
0.188	4.78	66702S	1.750	44.45	0.148	3.76	2.028	0.36	0.645	16.38	1.308	5.82	0.476	12.09	0.020	0.51	22.8	316 SS	C P
0.188	4.78	66703S	1.750	44.45	0.140	3.56	4.088	0.72	0.546	13.87	2.232	9.93	0.624	15.85	0.024	0.61	25	316 SS	C P
0.188	4.78	66704S	1.750	44.45	0.132	3.35	7.215	1.26	0.485	12.32	3.499	15.56	0.812	20.63	0.028	0.71	28	316 SS	C P
0.188	4.78	66705S	1.750	44.45	0.148	3.76	3.013	0.53	0.434	11.02	1.308	5.82	0.340	8.64	0.020	0.51	16	316 SS	C P
0.188	4.78	66706S	1.750	44.45	0.152	3.86	1.421	0.25	0.676	17.17	0.961	4.28	0.392	9.96	0.018	0.46	20.8	316 SS	C P
0.188	4.78	66707S	1.750	44.45	0.156	3.96	0.947	0.17	0.717	18.21	0.679	3.02	0.320	8.13	0.016	0.41	19	316 SS	C P
0.188	4.78	66708S	1.750	44.45	0.148	3.76	1.834	0.32	0.714	18.14	1.309	5.82	0.520	13.21	0.020	0.51	25	316 SS	C P
0.188	4.78	66709S	1.750	44.45	0.146	3.71	2.047	0.36	0.738	18.75	1.511	6.72	0.599	15.22	0.021	0.53	27.5	316 SS	C P
0.188	4.78	66710S	1.880	47.75	0.140	3.56	4.520	0.79	0.494	12.55	2.233	9.93	0.547	13.89	0.024	0.61	22.8	316 SS	CG P
0.188	4.78	66711S	1.880	47.75	0.130	3.30	7.095	1.24	0.546	13.87	3.874	17.23	0.957	24.31	0.029	0.74	33	316 SS	CG P
0.188	4.78	66712S	1.940	49.28	0.138	3.51	4.027	0.71	0.625	15.88	2.517	11.20	0.775	19.69	0.025	0.64	30	316 SS	C P
0.188	4.78	66713S	2.250	57.15	0.160	4.06	0.434	0.08	1.074	27.28	0.466	2.07	0.336	8.53	0.014	0.36	23	316 SS	C P
0.188	4.78	66714S	2.250	57.15	0.130	3.30	5.115	0.90	0.758	19.25	3.877	17.25	1.334	33.88	0.029	0.74	45	316 SS	C P
0.188	4.78	66715S	2.500	63.50	0.130	3.30	4.680	0.82	0.828	21.03	3.875	17.24	1.450	36.83	0.029	0.74	49	316 SS	C P
0.188	4.78	68012S	0.310	7.87	0.120	3.05	114.341	20.01	0.053	1.35	6.060	26.96	0.204	5.18	0.034	0.86	6	316 SS	CG P
0.188	4.78	68013S	0.380	9.65	0.124	3.15	115.084	20.14	0.045	1.14	5.179	23.04	0.192	4.88	0.032	0.81	5	316 SS	C P
0.188	4.78	68015S	0.410	10.41	0.124	3.15	69.050	12.08	0.075	1.91	5.179	23.04	0.256	6.50	0.032	0.81	7	316 SS	C P
0.188	4.78	68016S	0.440	11.18	0.124	3.15	53.116	9.30	0.097	2.46	5.152	22.92	0.304	7.72	0.032	0.81	8.5	316 SS	C P
0.188	4.78	68017S	0.470	11.94	0.118	3.00	87.288	15.28	0.076	1.93	6.634	29.51	0.280	7.11	0.035	0.89	8	316 SS	CG P
0.188	4.78	68019S	0.500	12.70	0.120	3.05	60.982	10.67	0.100	2.54	6.098	27.12	0.357	9.07	0.034	0.86	9.5	316 SS	C P
0.188	4.78	68021S	0.630	16.00	0.120	3.05	50.818	8.89	0.120	3.05	6.098	27.12	0.408	10.36	0.034	0.86	11	316 SS	C P
0.188	4.78	68022S	0.630	16.00	0.124	3.15	46.034	8.06	0.112	2.85	5.156	22.93	0.304	7.72	0.032	0.81	9.5	316 SS	CG P
0.188	4.78	68024S	0.750	19.05	0.124	3.15	28.771	5.04	0.179	4.55	5.150	22.91	0.480	12.19	0.032	0.81	14	316 SS	C P
0.188	4.78	68025S	0.750	19.05	0.118	3.00	49.879	8.73	0.133	3.38	6.634	29.51	0.438	11.13	0.035	0.89	12.5	316 SS	CG P
0.188	4.78	68027S	0.880	22.35	0.124	3.15	23.810	4.17	0.216	5.49	5.143	22.88	0.528	13.41	0.032	0.81	16.5	316 SS	CG P
0.188	4.78	68030S	0.910	23.11	0.124	3.15	24.661	4.32	0.209	5.31	5.154	22.93	0.544	13.82	0.032	0.81	16	316 SS	C P
0.188	4.78	68031S	0.940	23.88	0.124	3.15	21.578	3.78	0.239	6.07	5.157	22.94	0.608	15.44	0.032	0.81	18	316 SS	C P




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length		Wire Dia. Inches mm		Total Coils	E Mat'l	F Ends	s h			
0.188	4.78	60318S	0.500	12.70	0.166	4.22	0.730	0.13	0.320	8.13	0.234	1.04	0.083	2.11	0.011	0.28	6.5	316 SS	C	P
0.188	4.78	60319S	0.560	14.30	0.166	4.22	0.640	0.11	0.364	9.25	0.234	1.04	0.090	2.29	0.011	0.28	7.2	316 SS	C	P
0.188	4.78	60320S	0.630	15.88	0.166	4.22	0.580	0.10	0.406	10.31	0.234	1.04	0.096	2.44	0.011	0.28	7.7	316 SS	C	P
0.188	4.78	60321S	0.750	19.05	0.166	4.22	0.480	0.08	0.491	12.47	0.234	1.04	0.109	2.77	0.011	0.28	8.9	316 SS	C	P
0.188	4.78	60322S	0.880	22.23	0.166	4.22	0.410	0.07	0.577	14.66	0.234	1.04	0.123	3.12	0.011	0.28	10.2	316 SS	C	P
0.188	4.78	60323S	1.000	25.40	0.166	4.22	0.350	0.06	0.661	16.79	0.234	1.04	0.136	3.45	0.011	0.28	11.4	316 SS	C	P
0.188	4.78	60324S	1.250	31.75	0.166	4.22	0.280	0.05	0.832	21.13	0.234	1.04	0.162	4.11	0.011	0.28	13.7	316 SS	C	P
0.188	4.78	60325S	1.380	34.93	0.166	4.22	0.250	0.04	0.919	23.34	0.234	1.04	0.176	4.47	0.011	0.28	15	316 SS	C	P
0.188	4.78	60326S	1.500	38.10	0.166	4.22	0.230	0.04	1.005	25.53	0.234	1.04	0.189	4.80	0.011	0.28	16.2	316 SS	C	P
0.188	4.78	60327S	1.750	44.45	0.166	4.22	0.200	0.04	1.173	29.79	0.234	1.04	0.215	5.46	0.011	0.28	18.5	316 SS	C	P
0.188	4.78	60328S	0.250	6.35	0.164	4.17	1.640	0.29	0.174	4.42	0.286	1.27	0.073	1.85	0.012	0.30	5.1	316 SS	C	P
0.188	4.78	60329S	0.310	7.95	0.164	4.17	1.340	0.24	0.213	5.41	0.286	1.27	0.081	2.06	0.012	0.30	5.8	316 SS	C	P
0.188	4.78	60330S	0.380	9.53	0.164	4.17	1.090	0.19	0.262	6.66	0.286	1.27	0.091	2.31	0.012	0.30	6.6	316 SS	C	P
0.188	4.78	60331S	0.440	11.13	0.164	4.17	0.930	0.16	0.309	7.85	0.286	1.27	0.101	2.57	0.012	0.30	7.4	316 SS	C	P
0.188	4.78	60332S	0.500	12.70	0.164	4.17	0.800	0.14	0.358	9.09	0.286	1.27	0.111	2.82	0.012	0.30	8.3	316 SS	C	P
0.188	4.78	60333S	0.560	14.30	0.164	4.17	0.710	0.12	0.404	10.26	0.286	1.27	0.121	3.07	0.012	0.30	9.1	316 SS	C	P
0.188	4.78	60334S	0.630	15.88	0.164	4.17	0.630	0.11	0.452	11.48	0.286	1.27	0.131	3.33	0.012	0.30	9.9	316 SS	C	P
0.188	4.78	60335S	0.750	19.05	0.164	4.17	0.520	0.09	0.554	14.07	0.286	1.27	0.151	3.84	0.012	0.30	11.6	316 SS	C	P
0.188	4.78	60336S	0.880	22.23	0.164	4.17	0.440	0.08	0.648	16.46	0.286	1.27	0.171	4.34	0.012	0.30	13.3	316 SS	C	P
0.188	4.78	60337S	1.000	25.40	0.164	4.17	0.380	0.07	0.747	18.97	0.286	1.27	0.191	4.85	0.012	0.30	14.9	316 SS	C	P
0.188	4.78	60338S	1.250	31.75	0.164	4.17	0.310	0.05	0.928	23.57	0.286	1.27	0.231	5.87	0.012	0.30	18.3	316 SS	C	P
0.188	4.78	60339S	1.380	34.93	0.164	4.17	0.280	0.05	1.041	26.44	0.286	1.27	0.251	6.38	0.012	0.30	19.9	316 SS	C	P
0.188	4.78	60340S	1.500	38.10	0.164	4.17	0.250	0.04	1.145	29.08	0.286	1.27	0.271	6.88	0.012	0.30	21.6	316 SS	C	P
0.188	4.78	60341S	1.750	44.45	0.164	4.17	0.220	0.04	1.321	33.55	0.286	1.27	0.311	7.90	0.012	0.30	24.9	316 SS	C	P
0.188	4.78	60342S	0.250	6.35	0.162	4.12	4.060	0.71	0.093	2.36	0.379	1.69	0.062	1.57	0.013	0.33	3.8	316 SS	C	P
0.188	4.78	60343S	0.310	7.95	0.162	4.12	3.120	0.55	0.121	3.07	0.379	1.69	0.069	1.75	0.013	0.33	4.3	316 SS	C	P
0.188	4.78	60344S	0.380	9.53	0.162	4.12	2.550	0.45	0.149	3.79	0.379	1.69	0.075	1.91	0.013	0.33	4.8	316 SS	C	P
0.188	4.78	60345S	0.440	11.13	0.162	4.12	2.150	0.38	0.176	4.47	0.379	1.69	0.000	0.00	0.013	0.33	5.3	316 SS	C	P
0.188	4.78	60346S	0.500	12.70	0.162	4.12	1.860	0.33	0.204	5.18	0.379	1.69	0.088	2.24	0.013	0.33	5.8	316 SS	C	P
0.188	4.78	60347S	0.560	14.30	0.162	4.12	1.630	0.29	0.232	5.89	0.379	1.69	0.095	2.41	0.013	0.33	6.3	316 SS	C	P
0.188	4.78	60348S	0.630	15.88	0.162	4.12	1.460	0.26	0.260	6.60	0.379	1.69	0.101	2.57	0.013	0.33	6.8	316 SS	C	P
0.188	4.78	60349S	0.750	19.05	0.162	4.12	1.210	0.21	0.314	7.98	0.379	1.69	0.114	2.90	0.013	0.33	7.8	316 SS	C	P
0.188	4.78	60350S	0.880	22.23	0.162	4.12	1.030	0.18	0.370	9.40	0.379	1.69	0.127	3.23	0.013	0.33	8.8	316 SS	C	P
0.188	4.78	60351S	1.000	25.40	0.162	4.12	0.890	0.16	0.425	10.80	0.379	1.69	0.140	3.56	0.013	0.33	9.8	316 SS	C	P
0.188	4.78	60352S	1.250	31.75	0.162	4.12	0.710	0.12	0.535	13.59	0.379	1.69	0.166	4.22	0.013	0.33	11.8	316 SS	C	P
0.188	4.78	60353S	1.380	34.93	0.162	4.12	0.640	0.11	0.591	15.01	0.379	1.69	0.179	4.55	0.013	0.33	12.8	316 SS	C	P
0.188	4.78	60810S	0.250	6.35	0.160	4.06	2.830	0.50	0.173	4.39	0.489	2.18	0.075	1.91	0.014	0.36	5.4	316 SS	CG	P
0.188	4.78	60811S	0.310	7.95	0.160	4.06	2.210	0.39	0.221	5.61	0.489	2.18	0.088	2.24	0.014	0.36	6.3	316 SS	CG	P
0.188	4.78	60812S	0.380	9.53	0.160	4.06	1.810	0.32	0.270	6.86	0.489	2.18	0.101	2.57	0.014	0.36	7.2	316 SS	CG	P
0.188	4.78	60813S	0.440	11.13	0.160	4.06	1.530	0.27	0.319	8.10	0.489	2.18	0.115	2.92	0.014	0.36	8.2	316 SS	CG	P
0.188	4.78	60814S	0.500	12.70	0.160	4.06	1.330	0.23	0.367	9.32	0.489	2.18	0.128	3.25	0.014	0.36	9.1	316 SS	CG	P
0.188	4.78	60815S	0.560	14.30	0.160	4.06	1.180	0.21	0.416	10.57	0.489	2.18	0.141	3.58	0.014	0.36	10.1	316 SS	CG	P
0.188	4.78	60816S	0.630	15.88	0.160	4.06	1.050	0.18	0.466	11.84	0.489	2.18	0.154	3.91	0.014	0.36	11	316 SS	CG	P
0.188	4.78	60817S	0.750	19.05	0.160	4.06	0.870	0.15	0.564	14.33	0.489	2.18	0.180	4.57	0.014	0.36	12.9	316 SS	CG	P
0.188	4.78	60818S	0.880	22.23	0.160	4.06	0.740	0.13	0.659	16.74	0.489	2.18	0.206	5.23	0.014	0.36	14.7	316 SS	CG	P
0.188	4.78	60819S	1.000	25.40	0.160	4.06	0.650	0.11	0.752	19.10	0.489	2.18	0.232	5.89	0.014	0.36	16.6	316 SS	CG	P
0.188	4.78	60820S	1.250	31.75	0.160	4.06	0.520	0.09	0.946	24.03	0.489	2.18	0.284	7.21	0.014	0.36	20.3	316 SS	CG	P
0.188	4.78	60821S	1.380	34.93	0.160	4.06	0.470	0.08	1.048	26.62	0.489	2.18	0.311	7.90	0.014	0.36	22.2	316 SS	CG	P
0.188	4.78	60822S	1.500	38.10	0.160	4.06	0.430	0.07	1.150	29.21	0.489	2.18	0.337	8.56	0.014	0.36	24.1	316 SS	CG	P
0.188	4.78	60823S	1.750	44.45	0.160	4.06	0.370	0.06	1.333	33.86	0.489	2.18	0.389	9.88	0.014	0.36	27.8	316 SS	CG	P
0.188	4.78	60824S	0.250	6.35	0.152	3.86	12.140	2.12	0.082	2.08	1.000	4.45	0.078	1.98	0.018	0.46	4.3	316 SS	CG	P
0.188	4.78	60825S	0.310	7.95	0.152	3.86	9.380	1.64	0.107	2.72	1.000	4.45	0.090	2.29	0.018	0.46	5	316 SS	CG	P
0.188	4.78	60826S	0.380	9.53	0.152	3.86	7.660	1.34	0.131	3.33	1.000	4.45	0.102	2.59	0.018	0.46	5.7	316 SS	CG	P
0.188	4.78	60827S	0.440	11.13	0.152	3.86	6.460	1.13	0.155	3.94	1.000	4.45	0.114							




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg Max. Defl. Inches	Sugg Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish								
mm		mm	mm	N/mm	mm	N	mm	mm												
0.188	4.78	60849S	0.880	22.23	0.148	3.76	4.280	0.75	0.315	8.00	1.349	6.00	0.246	6.25	0.020	0.51	12.3	316 SS	CG	P
0.188	4.78	60850S	0.940	23.83	0.148	3.76	3.980	0.70	0.339	8.61	1.349	6.00	0.262	6.65	0.020	0.51	13.1	316 SS	CG	P
0.188	4.78	60851S	1.000	25.40	0.148	3.76	3.720	0.65	0.362	9.20	1.349	6.00	0.277	7.04	0.020	0.51	13.9	316 SS	CG	P
0.188	4.78	60852S	1.130	28.58	0.148	3.76	3.290	0.58	0.410	10.41	1.349	6.00	0.307	7.80	0.020	0.51	15.4	316 SS	CG	P
0.188	4.78	60853S	1.250	31.75	0.148	3.76	2.950	0.52	0.458	11.63	1.349	6.00	0.338	8.59	0.020	0.51	16.9	316 SS	CG	P
0.188	4.78	60854S	1.500	38.10	0.148	3.76	2.450	0.43	0.551	14.00	1.349	6.00	0.399	10.13	0.020	0.51	20	316 SS	CG	P
0.188	4.78	60855S	1.750	44.45	0.148	3.76	2.090	0.37	0.645	16.38	1.349	6.00	0.461	11.71	0.020	0.51	23.1	316 SS	CG	P
0.188	4.78	60856S	0.250	6.35	0.142	3.61	25.630	4.49	0.076	1.93	1.957	8.71	0.120	3.05	0.023	0.58	5.2	316 SS	CG	P
0.188	4.78	60857S	0.310	7.95	0.142	3.61	19.580	3.43	0.100	2.54	1.957	8.71	0.142	3.61	0.023	0.58	6.2	316 SS	CG	P
0.188	4.78	60858S	0.380	9.53	0.142	3.61	15.890	2.78	0.123	3.12	1.957	8.71	0.164	4.17	0.023	0.58	7.1	316 SS	CG	P
0.188	4.78	60859S	0.440	11.13	0.142	3.61	13.340	2.33	0.147	3.73	1.957	8.71	0.187	4.75	0.023	0.58	8.1	316 SS	CG	P
0.188	4.78	60860S	0.500	12.70	0.142	3.61	11.510	2.02	0.170	4.32	1.957	8.71	0.209	5.31	0.023	0.58	9.1	316 SS	CG	P
0.188	4.78	60861S	0.560	14.30	0.142	3.61	10.110	1.77	0.194	4.93	1.957	8.71	0.231	5.87	0.023	0.58	10	316 SS	CG	P
0.188	4.78	60862S	0.630	15.88	0.142	3.61	9.030	1.58	0.217	5.51	1.957	8.71	0.253	6.43	0.023	0.58	11	316 SS	CG	P
0.188	4.78	60863S	0.750	19.05	0.142	3.61	7.430	1.30	0.263	6.68	1.957	8.71	0.298	7.57	0.023	0.58	13	316 SS	CG	P
0.188	4.78	60864S	0.880	22.23	0.142	3.61	6.310	1.10	0.310	7.87	1.957	8.71	0.342	8.69	0.023	0.58	14.9	316 SS	CG	P
0.188	4.78	60865S	1.000	25.40	0.142	3.61	5.480	0.96	0.357	9.07	1.957	8.71	0.387	9.83	0.023	0.58	16.8	316 SS	CG	P
0.188	4.78	60866S	1.250	31.75	0.142	3.61	4.340	0.76	0.451	11.46	1.957	8.71	0.476	12.09	0.023	0.58	20.7	316 SS	CG	P
0.188	4.78	60867S	1.380	34.93	0.142	3.61	3.930	0.69	0.498	12.65	1.957	8.71	0.520	13.21	0.023	0.58	22.6	316 SS	CG	P
0.188	4.78	60868S	1.500	38.10	0.142	3.61	3.600	0.63	0.544	13.82	1.957	8.71	0.565	14.35	0.023	0.58	24.6	316 SS	CG	P
0.188	4.78	60869S	1.750	44.45	0.142	3.61	3.040	0.53	0.644	16.36	1.957	8.71	0.654	16.61	0.023	0.58	28.4	316 SS	CG	P
0.188	4.78	60870S	2.000	50.80	0.142	3.61	2.650	0.46	0.739	18.77	1.957	8.71	0.743	18.87	0.023	0.58	32.3	316 SS	CG	P
0.188	4.78	60871S	0.250	6.35	0.136	3.45	50.890	8.91	0.056	1.42	2.834	12.61	0.124	3.15	0.026	0.66	4.8	316 SS	CG	P
0.188	4.78	60872S	0.310	7.95	0.136	3.45	38.610	6.76	0.073	1.85	2.834	12.61	0.147	3.73	0.026	0.66	5.7	316 SS	CG	P
0.188	4.78	60873S	0.380	9.53	0.136	3.45	31.200	5.46	0.091	2.31	2.834	12.61	0.169	4.29	0.026	0.66	6.5	316 SS	CG	P
0.188	4.78	60874S	0.440	11.13	0.136	3.45	26.110	4.57	0.109	2.77	2.834	12.61	0.191	4.85	0.026	0.66	7.3	316 SS	CG	P
0.188	4.78	60875S	0.500	12.70	0.136	3.45	22.490	3.94	0.126	3.20	2.834	12.61	0.213	5.41	0.026	0.66	8.2	316 SS	CG	P
0.188	4.78	60876S	0.560	14.30	0.136	3.45	19.720	3.45	0.144	3.66	2.834	12.61	0.236	5.99	0.026	0.66	9.1	316 SS	CG	P
0.188	4.78	60877S	0.630	15.88	0.136	3.45	17.590	3.08	0.161	4.09	2.834	12.61	0.258	6.55	0.026	0.66	9.9	316 SS	CG	P
0.188	4.78	60878S	0.690	17.48	0.136	3.45	15.840	2.77	0.179	4.55	2.834	12.61	0.281	7.14	0.026	0.66	10.8	316 SS	CG	P
0.188	4.78	60879S	0.750	19.05	0.136	3.45	14.440	2.53	0.196	4.98	2.834	12.61	0.303	7.70	0.026	0.66	11.7	316 SS	CG	P
0.188	4.78	60880S	0.880	22.23	0.136	3.45	12.250	2.14	0.231	5.87	2.834	12.61	0.347	8.81	0.026	0.66	13.3	316 SS	CG	P
0.188	4.78	60881S	0.940	23.83	0.136	3.45	11.370	1.99	0.249	6.33	2.834	12.61	0.370	9.40	0.026	0.66	14.2	316 SS	CG	P
0.188	4.78	60882S	1.000	25.40	0.136	3.45	10.160	1.78	0.279	7.09	2.834	12.61	0.398	10.11	0.026	0.66	15.3	316 SS	CG	P
0.188	4.78	60883S	1.130	28.58	0.136	3.45	9.320	1.63	0.304	7.72	2.834	12.61	0.439	11.15	0.026	0.66	16.9	316 SS	CG	P
0.188	4.78	60884S	1.250	31.75	0.136	3.45	8.360	1.46	0.339	8.61	2.834	12.61	0.484	12.29	0.026	0.66	18.6	316 SS	CG	P
0.188	4.78	60885S	1.500	38.10	0.136	3.45	6.910	1.21	0.410	10.41	2.834	12.61	0.574	14.58	0.026	0.66	22.1	316 SS	CG	P
0.188	4.78	60886S	1.750	44.45	0.136	3.45	5.890	1.03	0.481	12.22	2.834	12.61	0.664	16.87	0.026	0.66	25.5	316 SS	CG	P
0.188	4.78	60887S	0.250	6.35	0.130	3.30	81.060	14.19	0.048	1.22	3.923	17.45	0.141	3.58	0.029	0.74	4.9	316 SS	CG	P
0.188	4.78	60888S	0.310	7.95	0.130	3.30	61.030	10.68	0.064	1.63	3.923	17.45	0.167	4.24	0.029	0.74	5.8	316 SS	CG	P
0.188	4.78	60889S	0.380	9.53	0.130	3.30	49.100	8.59	0.080	2.03	3.923	17.45	0.193	4.90	0.029	0.74	6.7	316 SS	CG	P
0.188	4.78	60890S	0.440	11.13	0.130	3.30	40.960	7.17	0.096	2.44	3.923	17.45	0.220	5.59	0.029	0.74	7.6	316 SS	CG	P
0.188	4.78	60891S	0.500	12.70	0.130	3.30	35.210	6.16	0.111	2.82	3.923	17.45	0.246	6.25	0.029	0.74	8.5	316 SS	CG	P
0.188	4.78	60892S	0.560	14.30	0.130	3.30	30.820	5.39	0.127	3.23	3.923	17.45	0.273	6.93	0.029	0.74	9.4	316 SS	CG	P
0.188	4.78	60893S	0.630	15.88	0.130	3.30	27.450	4.80	0.143	3.63	3.923	17.45	0.299	7.59	0.029	0.74	10.3	316 SS	CG	P
0.188	4.78	60894S	0.690	17.48	0.130	3.30	24.710	4.32	0.159	4.04	3.923	17.45	0.326	8.28	0.029	0.74	11.2	316 SS	CG	P
0.188	4.78	60895S	0.750	19.05	0.130	3.30	22.490	3.94	0.174	4.42	3.923	17.45	0.352	8.94	0.029	0.74	12.1	316 SS	CG	P
0.188	4.78	60896S	0.810	20.65	0.130	3.30	20.620	3.61	0.190	4.83	3.923	17.45	0.378	9.60	0.029	0.74	13	316 SS	CG	P
0.188	4.78	60897S	0.880	22.23	0.130	3.30	19.050	3.33	0.206	5.23	3.923	17.45	0.404	10.26	0.029	0.74	13.9	316 SS	CG	P
0.188	4.78	60898S	0.940	23.83	0.130	3.30	17.690	3.10	0.222	5.64	3.923	17.45	0.431	10.95	0.029	0.74	14.9	316 SS	CG	P
0.188	4.78	60899S	1.130	28.58	0.130	3.30	14.590	2.55	0.269	6.83	3.923	17.45	0.510	12.95	0.029	0.74	17.6	316 SS	CG	P
0.188	4.78	60900S	1.250	31.75	0.130	3.30	13.050	2.28	0.301	7.65	3.923	17.45	0.563	14.30	0.029	0.74	19.4	316 SS	CG	P
0.188	4.78	60901S	1.380	34.93	0.130	3.30	11.820	2.07	0.332	8.43	3.923	17.45	0.615	15.62	0.029	0.74	21.2	316 SS	CG	P
0.188	4.78</td																			




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	E n d s h								
0.188	4.78	61028S	0.250	6.35	0.152	3.86	12.140	2.13	0.081	2.05	0.983	4.37	0.078	1.98	0.018	0.46	4.2	316 SS	CG P
0.188	4.78	61029S	0.310	7.95	0.152	3.86	9.380	1.64	0.104	2.65	0.975	4.33	0.090	2.28	0.018	0.46	4.9	316 SS	CG P
0.188	4.78	61030S	0.380	9.53	0.152	3.86	7.660	1.34	0.128	3.24	0.981	4.36	0.102	2.58	0.018	0.46	5.5	316 SS	CG P
0.188	4.78	61031S	0.440	11.13	0.152	3.86	6.460	1.13	0.152	3.84	0.982	4.36	0.114	2.89	0.018	0.46	6.1	316 SS	CG P
0.188	4.78	61032S	0.500	12.70	0.152	3.86	5.830	1.02	0.168	4.26	0.980	4.36	0.122	3.10	0.018	0.46	6.6	316 SS	CG P
0.188	4.78	61033S	0.560	14.30	0.152	3.86	4.930	0.86	0.199	5.04	0.981	4.36	0.137	3.49	0.018	0.46	7.4	316 SS	CG P
0.188	4.78	61034S	0.630	15.88	0.152	3.86	4.410	0.77	0.222	5.63	0.979	4.35	0.149	3.79	0.018	0.46	8.1	316 SS	CG P
0.188	4.78	61035S	0.690	17.48	0.152	3.86	3.980	0.70	0.246	6.23	0.980	4.36	0.161	4.10	0.018	0.46	8.7	316 SS	CG P
0.188	4.78	61036S	0.750	19.05	0.152	3.86	3.640	0.64	0.269	6.83	0.979	4.35	0.173	4.40	0.018	0.46	9.3	316 SS	CG P
0.188	4.78	61037S	0.880	22.23	0.152	3.86	3.100	0.54	0.316	8.02	0.978	4.35	0.197	5.00	0.018	0.46	10.6	316 SS	CG P
0.188	4.78	61038S	0.940	23.83	0.152	3.86	2.880	0.50	0.340	8.63	0.979	4.35	0.209	5.31	0.018	0.46	11.3	316 SS	CG P
0.188	4.78	61039S	1.000	25.40	0.152	3.86	2.580	0.45	0.379	9.62	0.979	4.35	0.237	6.03	0.018	0.46	12.8	316 SS	CG P
0.188	4.78	61040S	1.130	28.58	0.152	3.86	2.390	0.42	0.410	10.40	0.978	4.35	0.245	6.21	0.018	0.46	13.2	316 SS	CG P
0.188	4.78	61041S	1.250	31.75	0.152	3.86	2.140	0.38	0.457	11.60	0.978	4.35	0.268	6.81	0.018	0.46	14.5	316 SS	CG P
0.188	4.78	61042S	1.500	38.10	0.152	3.86	1.770	0.31	0.552	13.98	0.979	4.35	0.316	8.03	0.018	0.46	17.1	316 SS	CG P
0.188	4.78	61043S	1.750	44.45	0.152	3.86	1.520	0.27	0.646	16.35	0.979	4.35	0.364	9.24	0.018	0.46	19.6	316 SS	CG P
0.188	4.78	61134S	0.250	6.35	0.148	3.76	17.010	2.98	0.078	1.98	1.327	5.90	0.093	2.35	0.020	0.51	4.5	316 SS	CG P
0.188	4.78	61135S	0.310	7.95	0.148	3.76	13.080	2.29	0.101	2.57	1.321	5.87	0.108	2.75	0.020	0.51	5.3	316 SS	CG P
0.188	4.78	61136S	0.380	9.53	0.148	3.76	10.660	1.87	0.124	3.16	1.322	5.88	0.123	3.13	0.020	0.51	6	316 SS	CG P
0.188	4.78	61137S	0.440	11.13	0.148	3.76	8.980	1.57	0.148	3.75	1.328	5.90	0.139	3.53	0.020	0.51	6.7	316 SS	CG P
0.188	4.78	61138S	0.500	12.70	0.148	3.76	7.770	1.36	0.171	4.33	1.328	5.90	0.154	3.91	0.020	0.51	7.5	316 SS	CG P
0.188	4.78	61139S	0.560	14.30	0.148	3.76	6.830	1.20	0.194	4.93	1.325	5.89	0.170	4.31	0.020	0.51	8.2	316 SS	CG P
0.188	4.78	61140S	0.630	15.88	0.148	3.76	6.110	1.07	0.217	5.51	1.325	5.89	0.185	4.69	0.020	0.51	9	316 SS	CG P
0.188	4.78	61141S	0.690	17.48	0.148	3.76	5.510	0.97	0.241	6.11	1.328	5.90	0.200	5.08	0.020	0.51	9.7	316 SS	CG P
0.188	4.78	61142S	0.750	19.05	0.148	3.76	5.030	0.88	0.264	6.69	1.328	5.90	0.215	5.47	0.020	0.51	10.5	316 SS	CG P
0.188	4.78	61143S	0.880	22.23	0.148	3.76	4.280	0.75	0.310	7.87	1.326	5.89	0.246	6.25	0.020	0.51	11.9	316 SS	CG P
0.188	4.78	61144S	0.940	23.83	0.148	3.76	3.980	0.70	0.333	8.45	1.325	5.89	0.262	6.64	0.020	0.51	12.7	316 SS	CG P
0.188	4.78	61145S	1.000	25.40	0.148	3.76	3.720	0.65	0.356	9.04	1.325	5.89	0.277	7.03	0.020	0.51	13.4	316 SS	CG P
0.188	4.78	61146S	1.130	28.58	0.148	3.76	3.290	0.58	0.403	10.21	1.327	5.90	0.307	7.81	0.020	0.51	14.9	316 SS	CG P
0.188	4.78	61147S	1.250	31.75	0.148	3.76	2.950	0.52	0.449	11.40	1.325	5.89	0.338	8.59	0.020	0.51	16.4	316 SS	CG P
0.188	4.78	61148S	1.500	38.10	0.148	3.76	2.450	0.43	0.542	13.73	1.326	5.89	0.399	10.14	0.020	0.51	19.4	316 SS	CG P
0.188	4.78	61149S	1.750	44.45	0.148	3.76	2.090	0.37	0.635	16.10	1.327	5.90	0.461	11.70	0.020	0.51	22.4	316 SS	CG P
0.188	4.78	61329S	0.250	6.35	0.142	3.62	25.630	4.49	0.075	1.91	1.922	8.54	0.120	3.05	0.023	0.58	5.1	316 SS	CG P
0.188	4.78	61330S	0.310	7.95	0.142	3.62	19.580	3.43	0.099	2.50	1.939	8.62	0.142	3.62	0.023	0.58	6	316 SS	CG P
0.188	4.78	61331S	0.380	9.53	0.142	3.62	15.890	2.78	0.122	3.09	1.939	8.62	0.164	4.18	0.023	0.58	6.9	316 SS	CG P
0.188	4.78	61332S	0.440	11.13	0.142	3.62	13.340	2.34	0.145	3.68	1.934	8.60	0.187	4.75	0.023	0.58	7.9	316 SS	CG P
0.188	4.78	61333S	0.500	12.70	0.142	3.62	11.520	2.02	0.168	4.26	1.935	8.60	0.209	5.31	0.023	0.58	8.8	316 SS	CG P
0.188	4.78	61334S	0.560	14.30	0.142	3.62	10.110	1.77	0.191	4.85	1.932	8.59	0.231	5.88	0.023	0.58	9.8	316 SS	CG P
0.188	4.78	61335S	0.630	15.88	0.142	3.62	9.030	1.58	0.214	5.43	1.932	8.59	0.253	6.44	0.023	0.58	10.7	316 SS	CG P
0.188	4.78	61336S	0.750	19.05	0.142	3.62	7.430	1.30	0.260	6.60	1.931	8.58	0.298	7.57	0.023	0.58	12.6	316 SS	CG P
0.188	4.78	61337S	0.880	22.23	0.142	3.62	6.310	1.11	0.306	7.77	1.930	8.58	0.342	8.70	0.023	0.58	14.5	316 SS	CG P
0.188	4.78	61338S	1.000	25.40	0.142	3.62	5.480	0.96	0.353	8.94	1.934	8.60	0.387	9.83	0.023	0.58	16.3	316 SS	CG P
0.188	4.78	61339S	1.250	31.75	0.142	3.62	4.340	0.76	0.445	11.30	1.932	8.59	0.476	12.09	0.023	0.58	20.1	316 SS	CG P
0.188	4.78	61340S	1.380	34.93	0.142	3.62	3.930	0.69	0.491	12.46	1.932	8.59	0.520	13.22	0.023	0.58	22	316 SS	CG P
0.188	4.78	61341S	1.500	38.10	0.142	3.62	3.600	0.63	0.537	13.63	1.931	8.58	0.565	14.35	0.023	0.58	23.9	316 SS	CG P
0.188	4.78	61342S	1.750	44.45	0.142	3.62	3.040	0.53	0.636	16.14	1.933	8.59	0.654	16.61	0.023	0.58	27.6	316 SS	CG P
0.188	4.78	61343S	2.000	50.80	0.142	3.62	2.650	0.46	0.729	18.50	1.933	8.59	0.743	18.87	0.023	0.58	31.4	316 SS	CG P
0.188	4.78	61424S	0.250	6.35	0.136	3.46	50.890	8.91	0.055	1.41	2.799	12.44	0.124	3.15	0.026	0.66	4.6	316 SS	CG P
0.188	4.78	61425S	0.310	7.95	0.136	3.46	38.610	6.76	0.073	1.85	2.818	12.52	0.147	3.73	0.026	0.66	5.5	316 SS	CG P
0.188	4.78	61426S	0.380	9.53	0.136	3.46	31.200	5.46	0.090	2.29	2.808	12.48	0.169	4.29	0.026	0.66	6.3	316 SS	CG P
0.188	4.78	61427S	0.440	11.13	0.136	3.46	26.100	4.57	0.108	2.74	2.819	12.53	0.191	4.86	0.026	0.66	7.1	316 SS	CG P
0.188	4.78	61428S	0.500	12.70	0.136	3.46	22.490	3.94	0.125	3.18	2.811	12.49	0.213	5.42	0.026	0.66	8	316 SS	CG P
0.188	4.78	61429S	0.560	14.30	0.136	3.46	19.720	3.45	0.143	3.63	2.820	12.53	0.236	5.99	0.026	0.66	8.8	316 SS	CG P
0.188	4.78	61430S	0.630	15.88	0.136	3.46	17.590	3.08	0.160	4.07	2.814	12.51	0.258	6.55	0.026	0.66	9.6	316 SS	CG P
0.188	4.78	61431S	0.690	17.48	0.136	3.46	15.840	2.78	0.178	4.51	2.820	12.53	0.281	7.12	0.026	0.66	10.5	316 SS	CG P
0																			




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish						
0.188	4.78	61606S	1.130	28.58	0.130	3.30	14.590	2.56	0.269	6.83	3.924	17.44	0.510	12.95	0.029	0.74	17.1	316 SS CG P
0.188	4.78	61607S	1.250	31.75	0.130	3.30	13.060	2.29	0.301	7.63	3.930	17.47	0.563	14.29	0.029	0.74	18.8	316 SS CG P
0.188	4.78	61608S	1.380	34.93	0.130	3.30	11.820	2.07	0.332	8.44	3.924	17.44	0.615	15.63	0.029	0.74	20.6	316 SS CG P
0.188	4.78	61609S	1.500	38.10	0.130	3.30	10.660	1.87	0.369	9.35	3.934	17.48	0.668	16.97	0.029	0.74	22.4	316 SS CG P
0.188	4.78	61610S	1.750	44.45	0.130	3.30	9.200	1.61	0.427	10.84	3.928	17.46	0.774	19.65	0.029	0.74	25.9	316 SS CG P
0.188	4.78	61611S	2.000	50.80	0.130	3.30	8.010	1.40	0.490	12.44	3.927	17.45	0.879	22.33	0.029	0.74	29.4	316 SS CG P
0.188	4.78	61675S	0.250	6.35	0.124	3.16	126.230	22.11	0.040	1.02	5.049	22.44	0.157	3.99	0.032	0.81	4.8	316 SS CG P
0.188	4.78	61676S	0.310	7.95	0.124	3.16	94.290	16.51	0.054	1.37	5.092	22.63	0.188	4.77	0.032	0.81	5.7	316 SS CG P
0.188	4.78	61677S	0.380	9.53	0.124	3.16	75.500	13.22	0.067	1.71	5.058	22.48	0.218	5.54	0.032	0.81	6.6	316 SS CG P
0.188	4.78	61678S	0.440	11.13	0.124	3.16	62.780	10.99	0.081	2.06	5.085	22.60	0.249	6.32	0.032	0.81	7.6	316 SS CG P
0.188	4.78	61679S	0.500	12.70	0.124	3.16	53.850	9.43	0.095	2.40	5.116	22.74	0.279	7.09	0.032	0.81	8.5	316 SS CG P
0.188	4.78	61680S	0.560	14.30	0.124	3.16	47.050	8.24	0.108	2.75	5.082	22.59	0.310	7.87	0.032	0.81	9.4	316 SS CG P
0.188	4.78	61681S	0.630	15.88	0.124	3.16	41.850	7.33	0.122	3.09	5.106	22.69	0.340	8.64	0.032	0.81	10.3	316 SS CG P
0.188	4.78	61682S	0.690	17.48	0.124	3.16	37.630	6.59	0.135	3.43	5.080	22.58	0.371	9.43	0.032	0.81	11.3	316 SS CG P
0.188	4.78	61683S	0.750	19.05	0.124	3.16	34.230	5.99	0.149	3.78	5.100	22.67	0.401	10.20	0.032	0.81	12.2	316 SS CG P
0.188	4.78	61684S	0.810	20.65	0.124	3.16	31.350	5.49	0.162	4.12	5.078	22.57	0.432	10.98	0.032	0.81	13.1	316 SS CG P
0.188	4.78	61685S	0.880	22.23	0.124	3.16	28.950	5.07	0.176	4.46	5.095	22.64	0.463	11.75	0.032	0.81	14	316 SS CG P
0.188	4.78	61686S	0.940	23.83	0.124	3.16	26.860	4.71	0.190	4.81	5.104	22.68	0.493	12.53	0.032	0.81	15	316 SS CG P
0.188	4.78	61687S	1.000	25.40	0.124	3.16	25.080	4.39	0.203	5.15	5.092	22.63	0.524	13.30	0.032	0.81	15.9	316 SS CG P
0.188	4.78	61688S	1.130	28.58	0.124	3.16	22.130	3.88	0.230	5.84	5.090	22.62	0.585	14.86	0.032	0.81	17.8	316 SS CG P
0.188	4.78	61689S	1.250	31.75	0.124	3.16	19.800	3.47	0.257	6.53	5.088	22.61	0.646	16.41	0.032	0.81	19.6	316 SS CG P
0.188	4.78	61690S	1.380	34.93	0.124	3.16	17.910	3.14	0.284	7.22	5.086	22.60	0.707	17.96	0.032	0.81	21.5	316 SS CG P
0.188	4.78	61691S	1.500	38.10	0.124	3.16	16.160	2.83	0.315	8.00	5.090	22.62	0.768	19.51	0.032	0.81	23.3	316 SS CG P
0.188	4.78	61692S	1.750	44.45	0.124	3.16	13.930	2.44	0.366	9.28	5.097	22.65	0.891	22.62	0.032	0.81	27	316 SS CG P
0.188	4.78	61693S	2.000	50.80	0.124	3.16	12.130	2.12	0.420	10.65	5.094	22.64	1.013	25.73	0.032	0.81	30.7	316 SS CG P
0.203	5.16	66716S	0.250	6.35	0.187	4.75	0.081	0.01	0.158	4.01	0.013	0.06	0.092	2.34	0.008	0.20	10.5	316 SS C P
0.203	5.16	66717S	0.310	7.87	0.173	4.39	1.905	0.33	0.190	4.83	0.362	1.61	0.120	3.05	0.015	0.38	7	316 SS C P
0.203	5.16	66718S	0.310	7.87	0.143	3.63	86.911	15.21	0.046	1.17	3.998	17.78	0.158	4.01	0.030	0.76	4.3	316 SS C P
0.203	5.16	66719S	0.310	7.87	0.167	4.24	6.908	1.21	0.129	3.28	0.891	3.96	0.108	2.74	0.018	0.46	5	316 SS C P
0.203	5.16	66720S	0.380	9.65	0.159	4.04	9.876	1.73	0.163	4.14	1.610	7.16	0.176	4.47	0.022	0.56	7	316 SS C P
0.203	5.16	66721S	0.380	9.65	0.153	3.89	12.368	2.16	0.155	3.94	1.917	8.53	0.225	5.72	0.025	0.64	9	316 SS CG P
0.203	5.16	66722S	0.440	11.18	0.163	4.14	7.252	1.27	0.168	4.27	1.218	5.42	0.150	3.81	0.020	0.51	6.5	316 SS C P
0.203	5.16	66723S	0.440	11.18	0.153	3.89	10.822	1.89	0.190	4.83	2.056	9.15	0.250	6.35	0.025	0.64	10	316 SS CG P
0.203	5.16	66724S	0.470	11.94	0.159	4.04	5.950	1.04	0.243	6.17	1.446	6.43	0.227	5.77	0.022	0.56	10.3	316 SS CG P
0.203	5.16	66725S	0.470	11.94	0.143	3.63	27.936	4.89	0.143	3.63	3.995	17.77	0.300	7.62	0.030	0.76	9	316 SS C P
0.203	5.16	66726S	0.470	11.94	0.175	4.45	0.903	0.16	0.318	8.08	0.287	1.28	0.152	3.86	0.014	0.36	9.9	316 SS C P
0.203	5.16	66727S	0.500	12.70	0.181	4.60	0.517	0.09	0.410	10.41	0.212	0.94	0.088	2.24	0.011	0.28	7	316 SS C P
0.203	5.16	66728S	0.500	12.70	0.175	4.45	0.647	0.11	0.318	8.08	0.206	0.92	0.182	4.62	0.014	0.36	13	316 SS CG P
0.203	5.16	66729S	0.500	12.70	0.167	4.24	2.763	0.48	0.311	7.90	0.859	3.82	0.189	4.80	0.018	0.46	9.5	316 SS C P
0.203	5.16	66730S	0.500	12.70	0.155	3.94	9.039	1.58	0.230	5.84	2.079	9.25	0.240	6.10	0.024	0.61	10	316 SS CG P
0.203	5.16	66731S	0.500	12.70	0.143	3.63	24.444	4.28	0.163	4.14	3.984	17.72	0.330	8.38	0.030	0.76	10	316 SS C P
0.203	5.16	66732S	0.500	12.70	0.173	4.39	0.952	0.17	0.305	7.75	0.290	1.29	0.195	4.95	0.015	0.38	12	316 SS C P
0.203	5.16	66733S	0.500	12.70	0.153	3.89	15.742	2.76	0.149	3.79	2.346	10.44	0.213	5.41	0.025	0.64	7.5	316 SS C P
0.203	5.16	66734S	0.500	12.70	0.155	3.94	10.330	1.81	0.202	5.13	2.087	9.28	0.240	6.10	0.024	0.61	9	316 SS C P
0.203	5.16	66735S	0.500	12.70	0.155	3.94	15.223	2.66	0.137	3.48	2.086	9.28	0.162	4.12	0.024	0.61	6.8	316 SS CG P
0.203	5.16	66736S	0.530	13.46	0.143	3.63	27.936	4.89	0.143	3.63	3.995	17.77	0.300	7.62	0.030	0.76	9	316 SS C P
0.203	5.16	66737S	0.560	14.22	0.161	4.09	6.204	1.09	0.227	5.77	1.408	6.26	0.200	5.08	0.021	0.53	8.5	316 SS C P
0.203	5.16	66738S	0.560	14.22	0.171	4.34	2.088	0.37	0.302	7.67	0.631	2.81	0.144	3.66	0.016	0.41	8	316 SS C P
0.203	5.16	66739S	0.590	14.99	0.167	4.24	1.884	0.33	0.356	9.04	0.671	2.99	0.234	5.94	0.018	0.46	13	316 SS CG P
0.203	5.16	66740S	0.630	16.00	0.155	3.94	16.069	2.81	0.130	3.30	2.089	9.29	0.180	4.57	0.024	0.61	6.5	316 SS C P
0.203	5.16	66741S	0.630	16.00	0.155	3.94	7.231	1.27	0.288	7.32	2.083	9.27	0.312	7.93	0.024	0.61	12	316 SS C P
0.203	5.16	66742S	0.630	16.00	0.179	4.55	0.413	0.07	0.486	12.34	0.201	0.89	0.144	3.66	0.012	0.31	11	316 SS C P
0.203	5.16	66743S	0.690	17.53	0.147	3.73	17.920	3.14	0.182	4.62	3.261	14.51	0.308	7.82	0.028	0.71	10	316 SS C P
0.203	5.16	66744S	0.690	17.53	0.171	4.34	1.044	0.18	0.450	11.43	0.470	2.09	0.240	6.10	0.016	0.41	14	316 SS C P
0.203	5.16	66745S	0.720	18.29	0.143	3.63	19.555	3.42	0.204	5.18	3.989	17.74	0.360	9.14	0.030	0.76	12	316 SS CG P
0.203	5.16	66746S	0.720	18.29	0.153	3.89	9.620	1.68	0.244	6.20	2.347	10.44	0.275	6.99	0.025	0.64	11	316 SS CG P
0.203	5.16	66747S	0.750	19.05	0.159	4.04	6.584</											




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm		Wire Dia. Inches mm		Total Coils	E N D S Mat'l	F n s h		
0.203	5.16	66766S	1.220	30.99	0.143	3.63	12.222	2.14	0.327	8.31	3.997	17.78	0.570	14.48	0.030	0.76	18	316 SS C P
0.203	5.16	66767S	1.250	31.75	0.155	3.94	5.785	1.01	0.360	9.14	2.083	9.27	0.372	9.45	0.024	0.61	14.5	316 SS C P
0.203	5.16	66768S	1.310	33.27	0.171	4.34	0.716	0.13	0.880	22.35	0.630	2.80	0.312	7.93	0.016	0.41	19.5	316 SS CG P
0.203	5.16	66769S	1.340	34.04	0.163	4.14	2.331	0.41	0.523	13.28	1.219	5.42	0.340	8.64	0.020	0.51	16	316 SS C P
0.203	5.16	66770S	1.500	38.10	0.151	3.84	6.438	1.13	0.408	10.36	2.627	11.69	0.494	12.55	0.026	0.66	18	316 SS C P
0.203	5.16	66771S	1.500	38.10	0.153	3.89	4.329	0.76	0.541	13.74	2.342	10.42	0.575	14.61	0.025	0.64	22	316 SS C P
0.203	5.16	66772S	1.560	39.62	0.155	3.94	4.017	0.70	0.519	13.18	2.085	9.27	0.504	12.80	0.024	0.61	20	316 SS C P
0.203	5.16	66773S	1.750	44.45	0.159	4.04	2.195	0.38	0.734	18.64	1.611	7.17	0.561	14.25	0.022	0.56	24.5	316 SS C P
0.203	5.16	66774S	1.780	45.21	0.153	3.89	2.624	0.46	0.893	22.68	2.343	10.42	0.875	22.23	0.025	0.64	35	316 SS CG P
0.203	5.16	68034S	0.250	6.35	0.123	3.12	246.301	43.10	0.037	0.94	9.113	40.54	0.200	5.08	0.040	1.02	5	316 SS CG P
0.203	5.16	68035S	0.310	7.87	0.131	3.33	180.314	31.56	0.037	0.94	6.672	29.68	0.198	5.03	0.036	0.91	4.5	316 SS C P
0.203	5.16	68036S	0.500	12.70	0.123	3.12	105.558	18.47	0.086	2.18	9.078	40.38	0.360	9.14	0.040	1.02	9	316 SS CG P
0.203	5.16	68037S	0.560	14.22	0.135	3.43	43.259	7.57	0.132	3.35	5.710	25.40	0.340	8.64	0.034	0.86	10	316 SS CG P
0.203	5.16	68038S	0.630	16.00	0.123	3.12	123.150	21.55	0.074	1.88	9.113	40.54	0.320	8.13	0.040	1.02	8	316 SS CG P
0.203	5.16	68039S	0.690	17.53	0.123	3.12	73.890	12.93	0.123	3.12	9.088	40.42	0.480	12.19	0.040	1.02	12	316 SS CG P
0.203	5.16	68040S	0.690	17.53	0.131	3.33	150.262	26.30	0.045	1.14	6.762	30.08	0.180	4.57	0.036	0.91	5	316 SS CG P
0.203	5.16	68041S	0.880	22.35	0.133	3.38	34.400	6.02	0.181	4.60	6.226	27.69	0.473	12.01	0.035	0.89	13.5	316 SS CG P
0.203	5.16	68042S	1.160	29.46	0.133	3.38	25.522	4.47	0.244	6.20	6.227	27.70	0.648	16.46	0.035	0.89	17.5	316 SS C P
0.203	5.16	68043S	1.190	30.23	0.123	3.12	52.779	9.24	0.173	4.39	9.131	40.62	0.680	17.27	0.040	1.02	16	316 SS C P
0.210	5.33	66775S	0.670	17.02	0.170	4.32	4.860	0.85	0.243	6.17	1.181	5.25	0.180	4.57	0.020	0.51	8	316 SS C P
0.210	5.33	61044S	0.250	6.35	0.174	4.41	9.250	1.62	0.095	2.42	0.878	3.90	0.074	1.88	0.018	0.46	4	316 SS CG P
0.210	5.33	61045S	0.310	7.95	0.174	4.41	7.160	1.26	0.123	3.12	0.881	3.92	0.085	2.16	0.018	0.46	4.6	316 SS CG P
0.210	5.33	61046S	0.380	9.53	0.174	4.41	5.830	1.02	0.151	3.83	0.880	3.91	0.096	2.44	0.018	0.46	5.2	316 SS CG P
0.210	5.33	61047S	0.440	11.13	0.174	4.41	4.920	0.86	0.179	4.55	0.880	3.91	0.107	2.72	0.018	0.46	5.8	316 SS CG P
0.210	5.33	61048S	0.500	12.70	0.174	4.41	4.250	0.74	0.207	5.26	0.879	3.91	0.117	2.97	0.018	0.46	6.4	316 SS CG P
0.210	5.33	61049S	0.560	14.30	0.174	4.41	3.750	0.66	0.235	5.96	0.881	3.92	0.128	3.25	0.018	0.46	7	316 SS CG P
0.210	5.33	61050S	0.630	15.88	0.174	4.41	3.330	0.58	0.264	6.70	0.880	3.91	0.139	3.53	0.018	0.46	7.6	316 SS CG P
0.210	5.33	61051S	0.690	17.48	0.174	4.41	3.080	0.54	0.286	7.25	0.881	3.92	0.150	3.81	0.018	0.46	8	316 SS CG P
0.210	5.33	61052S	0.750	19.05	0.174	4.41	2.750	0.48	0.320	8.14	0.880	3.91	0.161	4.09	0.018	0.46	8.7	316 SS CG P
0.210	5.33	61053S	0.810	20.65	0.174	4.41	2.580	0.45	0.341	8.66	0.880	3.91	0.172	4.37	0.018	0.46	9.2	316 SS CG P
0.210	5.33	61054S	0.880	22.35	0.174	4.41	2.330	0.41	0.378	9.59	0.881	3.92	0.183	4.65	0.018	0.46	10	316 SS CG P
0.210	5.33	61055S	1.000	25.40	0.174	4.41	2.080	0.37	0.423	10.72	0.881	3.92	0.204	5.18	0.018	0.46	10.9	316 SS CG P
0.210	5.33	61056S	1.250	31.75	0.174	4.41	1.670	0.29	0.529	13.40	0.881	3.92	0.247	6.27	0.018	0.46	13.1	316 SS CG P
0.210	5.33	61057S	1.500	38.10	0.174	4.41	1.330	0.23	0.661	16.80	0.881	3.92	0.291	7.39	0.018	0.46	15.9	316 SS CG P
0.210	5.33	61058S	1.750	44.45	0.174	4.41	1.170	0.20	0.755	19.19	0.881	3.92	0.332	8.43	0.018	0.46	17.9	316 SS CG P
0.210	5.33	61059S	2.000	50.80	0.174	4.41	1.000	0.18	0.881	22.37	0.881	3.92	0.381	9.68	0.018	0.46	20.5	316 SS CG P
0.210	5.33	61255S	0.310	7.95	0.166	4.21	12.700	2.22	0.124	3.14	1.575	7.00	0.130	3.30	0.022	0.56	5.5	316 SS CG P
0.210	5.33	61256S	0.250	6.35	0.166	4.21	16.500	2.89	0.095	2.42	1.568	6.97	0.112	2.84	0.022	0.56	4.7	316 SS CG P
0.210	5.33	61257S	0.380	9.53	0.166	4.21	10.200	1.79	0.154	3.91	1.571	6.98	0.139	3.53	0.022	0.56	6.3	316 SS CG P
0.210	5.33	61258S	0.440	11.13	0.166	4.21	8.700	1.52	0.181	4.59	1.575	7.00	0.156	3.96	0.022	0.56	7.1	316 SS CG P
0.210	5.33	61259S	0.500	12.70	0.166	4.21	7.500	1.31	0.210	5.32	1.575	7.00	0.174	4.42	0.022	0.56	7.9	316 SS CG P
0.210	5.33	61260S	0.560	14.30	0.166	4.21	6.600	1.16	0.238	6.05	1.571	6.98	0.193	4.90	0.022	0.56	8.7	316 SS CG P
0.210	5.33	61261S	0.630	15.88	0.166	4.21	5.800	1.02	0.271	6.88	1.572	6.99	0.209	5.31	0.022	0.56	9.6	316 SS CG P
0.210	5.33	61262S	0.690	17.48	0.166	4.21	5.200	0.91	0.303	7.67	1.576	7.00	0.229	5.82	0.022	0.56	10.5	316 SS CG P
0.210	5.33	61263S	0.750	19.05	0.166	4.21	4.700	0.82	0.335	8.49	1.575	7.00	0.246	6.25	0.022	0.56	11.4	316 SS CG P
0.210	5.33	61264S	0.810	20.65	0.166	4.21	4.400	0.77	0.358	9.07	1.575	7.00	0.264	6.71	0.022	0.56	12	316 SS CG P
0.210	5.33	61265S	1.000	25.40	0.166	4.21	3.500	0.61	0.449	11.40	1.572	6.99	0.317	8.05	0.022	0.56	14.6	316 SS CG P
0.210	5.33	61266S	1.250	31.75	0.166	4.21	2.800	0.49	0.562	14.27	1.574	7.00	0.389	9.88	0.022	0.56	17.7	316 SS CG P
0.210	5.33	61267S	1.500	38.10	0.166	4.21	2.300	0.40	0.684	17.35	1.573	6.99	0.460	11.68	0.022	0.56	21.2	316 SS CG P
0.210	5.33	61268S	1.750	44.45	0.166	4.21	1.990	0.35	0.790	20.03	1.573	6.99	0.547	13.89	0.022	0.56	24.1	316 SS CG P
0.210	5.33	61269S	2.000	50.80	0.166	4.21	1.730	0.30	0.907	22.99	1.573	6.99	0.621	15.77	0.022	0.56	27.4	316 SS CG P
0.210	5.33	61440S	0.310	7.95	0.158	4.01	24.400	4.27	0.104	2.65	2.538	11.28	0.160	4.06	0.026	0.66	5.8	316 SS CG P
0.210	5.33	61441S	0.250	6.35	0.158	4.01	32.000	5.60	0.080	2.02	2.560	11.38	0.137	3.48	0.026	0.66	4.9	316 SS CG P
0.210	5.33	61442S	0.380	9.53	0.158	4.01	19.600	3.43	0.130	3.30	2.548	11.32	0.176	4.47	0.026	0.66	6.7	316 SS CG P
0.210	5.33	61443S	0.440	11.13	0.158	4.01	16.500	2.89	0.154	3.92	2.541	11.29	0.200	5.08	0.026	0.66	7.6	316 SS CG P
0.210	5.33	61444S	0.500	12.70	0.158	4.01	14.200	2.49	0.179	4.55	2.542	11.30	0.224	5.69	0			




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg Max. Defl. Inches	Sugg Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish								
mm		mm	mm	N/mm	mm	N	mm	mm												
0.218	5.54	60363S	1.000	25.40	0.198	5.03	0.230	0.04	0.643	16.33	0.145	0.65	0.092	2.34	0.010	0.25	8.2	316 SS	C	P
0.218	5.54	60364S	1.250	31.75	0.198	5.03	0.180	0.03	0.811	20.60	0.145	0.65	0.108	2.74	0.010	0.25	9.8	316 SS	C	P
0.218	5.54	60365S	1.500	38.10	0.198	5.03	0.150	0.03	0.975	24.77	0.145	0.65	0.124	3.15	0.010	0.25	11.4	316 SS	C	P
0.218	5.54	60366S	1.750	44.45	0.198	5.03	0.130	0.02	1.142	29.01	0.145	0.65	0.000	0.00	0.010	0.25	13	316 SS	C	P
0.218	5.54	60367S	0.250	6.35	0.196	4.98	1.310	0.23	0.154	3.91	0.202	0.90	0.050	1.27	0.011	0.28	3.5	316 SS	C	P
0.218	5.54	60368S	0.310	7.95	0.196	4.98	1.010	0.18	0.199	5.06	0.202	0.90	0.055	1.40	0.011	0.28	4	316 SS	C	P
0.218	5.54	60369S	0.380	9.53	0.196	4.98	0.840	0.15	0.242	6.15	0.202	0.90	0.060	1.52	0.011	0.28	4.5	316 SS	C	P
0.218	5.54	60370S	0.440	11.13	0.196	4.98	0.710	0.12	0.287	7.29	0.202	0.90	0.065	1.65	0.011	0.28	4.9	316 SS	C	P
0.218	5.54	60371S	0.500	12.70	0.196	4.98	0.610	0.11	0.331	8.41	0.202	0.90	0.070	1.78	0.011	0.28	5.4	316 SS	C	P
0.218	5.54	60372S	0.560	14.30	0.196	4.98	0.540	0.10	0.374	9.50	0.202	0.90	0.075	1.91	0.011	0.28	5.8	316 SS	C	P
0.218	5.54	60373S	0.630	15.88	0.196	4.98	0.480	0.09	0.418	10.62	0.202	0.90	0.080	2.03	0.011	0.28	6.3	316 SS	C	P
0.218	5.54	60374S	0.750	19.05	0.196	4.98	0.400	0.07	0.506	12.85	0.202	0.90	0.090	2.29	0.011	0.28	7.2	316 SS	C	P
0.218	5.54	60375S	0.880	22.23	0.196	4.98	0.340	0.06	0.593	15.06	0.202	0.90	0.100	2.54	0.011	0.28	8.1	316 SS	C	P
0.218	5.54	60376S	1.000	25.40	0.196	4.98	0.300	0.05	0.682	17.32	0.202	0.90	0.109	2.77	0.011	0.28	8.9	316 SS	C	P
0.218	5.54	60377S	1.250	31.75	0.196	4.98	0.240	0.04	0.857	21.77	0.202	0.90	0.129	3.28	0.011	0.28	10.7	316 SS	C	P
0.218	5.54	60378S	1.500	38.10	0.196	4.98	0.200	0.03	1.033	26.24	0.202	0.90	0.149	3.78	0.011	0.28	12.5	316 SS	C	P
0.218	5.54	60379S	1.750	44.45	0.196	4.98	0.170	0.03	1.207	30.66	0.202	0.90	0.169	4.29	0.011	0.28	14.4	316 SS	C	P
0.218	5.54	60380S	0.250	6.35	0.194	4.93	2.340	0.41	0.106	2.69	0.248	1.10	0.051	1.30	0.012	0.30	3.3	316 SS	C	P
0.218	5.54	60381S	0.310	7.95	0.194	4.93	1.810	0.32	0.137	3.48	0.248	1.10	0.056	1.42	0.012	0.30	3.7	316 SS	C	P
0.218	5.54	60382S	0.380	9.53	0.194	4.93	1.470	0.26	0.168	4.27	0.248	1.10	0.060	1.52	0.012	0.30	4	316 SS	C	P
0.218	5.54	60383S	0.440	11.13	0.194	4.93	1.250	0.22	0.198	5.03	0.248	1.10	0.065	1.65	0.012	0.30	4.4	316 SS	C	P
0.218	5.54	60384S	0.500	12.70	0.194	4.93	1.080	0.19	0.229	5.82	0.248	1.10	0.069	1.75	0.012	0.30	4.8	316 SS	C	P
0.218	5.54	60385S	0.560	14.30	0.194	4.93	0.950	0.17	0.261	6.63	0.248	1.10	0.073	1.85	0.012	0.30	5.1	316 SS	C	P
0.218	5.54	60386S	0.630	15.88	0.194	4.93	0.850	0.15	0.292	7.42	0.248	1.10	0.078	1.98	0.012	0.30	5.5	316 SS	C	P
0.218	5.54	60387S	0.750	19.05	0.194	4.93	0.700	0.12	0.354	8.99	0.248	1.10	0.087	2.21	0.012	0.30	6.3	316 SS	C	P
0.218	5.54	60388S	0.880	22.23	0.194	4.93	0.600	0.11	0.413	10.49	0.248	1.10	0.096	2.44	0.012	0.30	7	316 SS	C	P
0.218	5.54	60389S	1.000	25.40	0.194	4.93	0.520	0.09	0.480	12.19	0.248	1.10	0.104	2.64	0.012	0.30	7.7	316 SS	C	P
0.218	5.54	60390S	1.250	31.75	0.194	4.93	0.420	0.07	0.595	15.11	0.248	1.10	0.122	3.10	0.012	0.30	9.2	316 SS	C	P
0.218	5.54	60391S	1.500	38.10	0.194	4.93	0.340	0.06	0.725	18.42	0.248	1.10	0.140	3.56	0.012	0.30	10.7	316 SS	C	P
0.218	5.54	60392S	1.750	44.45	0.194	4.93	0.290	0.05	0.850	21.59	0.248	1.10	0.158	4.01	0.012	0.30	12.2	316 SS	C	P
0.218	5.54	60393S	0.250	6.35	0.192	4.88	1.960	0.34	0.168	4.27	0.328	1.46	0.068	1.73	0.013	0.33	4.2	316 SS	C	P
0.218	5.54	60394S	0.310	7.95	0.192	4.88	1.510	0.26	0.218	5.54	0.328	1.46	0.077	1.96	0.013	0.33	4.9	316 SS	C	P
0.218	5.54	60395S	0.380	9.53	0.192	4.88	1.230	0.22	0.266	6.76	0.328	1.46	0.085	2.16	0.013	0.33	5.5	316 SS	C	P
0.218	5.54	60396S	0.440	11.13	0.192	4.88	1.030	0.18	0.318	8.08	0.328	1.46	0.094	2.39	0.013	0.33	6.2	316 SS	C	P
0.218	5.54	60397S	0.500	12.70	0.192	4.88	0.900	0.16	0.365	9.27	0.328	1.46	0.102	2.59	0.013	0.33	6.8	316 SS	C	P
0.218	5.54	60398S	0.560	14.30	0.192	4.88	0.790	0.14	0.415	10.54	0.328	1.46	0.110	2.79	0.013	0.33	7.5	316 SS	C	P
0.218	5.54	60399S	0.630	15.88	0.192	4.88	0.710	0.12	0.464	11.79	0.328	1.46	0.119	3.02	0.013	0.33	8.2	316 SS	C	P
0.218	5.54	60400S	0.750	19.05	0.192	4.88	0.580	0.10	0.563	14.30	0.328	1.46	0.136	3.45	0.013	0.33	9.5	316 SS	C	P
0.218	5.54	60401S	0.880	22.23	0.192	4.88	0.490	0.09	0.668	16.97	0.328	1.46	0.152	3.86	0.013	0.33	10.7	316 SS	C	P
0.218	5.54	60402S	1.000	25.40	0.192	4.88	0.430	0.08	0.758	19.25	0.328	1.46	0.169	4.29	0.013	0.33	12	316 SS	C	P
0.218	5.54	60403S	1.250	31.75	0.192	4.88	0.340	0.06	0.961	24.41	0.328	1.46	0.200	5.08	0.013	0.33	14.6	316 SS	C	P
0.218	5.54	60404S	1.500	38.10	0.192	4.88	0.280	0.05	1.159	29.44	0.328	1.46	0.236	5.99	0.013	0.33	17.2	316 SS	C	P
0.218	5.54	60405S	1.750	44.45	0.192	4.88	0.240	0.04	1.359	34.52	0.328	1.46	0.270	6.86	0.013	0.33	19.8	316 SS	C	P
0.218	5.54	60924S	0.250	6.35	0.186	4.72	3.919	0.69	0.154	3.92	0.604	2.68	0.075	1.91	0.016	0.41	4.5	316 SS	CG	P
0.218	5.54	60925S	0.310	7.95	0.186	4.72	3.040	0.53	0.199	5.04	0.605	2.69	0.087	2.20	0.016	0.41	5.3	316 SS	CG	P
0.218	5.54	60926S	0.380	9.53	0.186	4.72	2.490	0.44	0.243	6.16	0.605	2.69	0.099	2.50	0.016	0.41	6	316 SS	CG	P
0.218	5.54	60927S	0.440	11.13	0.186	4.72	2.110	0.37	0.287	7.28	0.604	2.68	0.111	2.81	0.016	0.41	6.7	316 SS	CG	P
0.218	5.54	60928S	0.500	12.70	0.186	4.72	1.830	0.32	0.331	8.40	0.604	2.68	0.123	3.11	0.016	0.41	7.4	316 SS	CG	P
0.218	5.54	60929S	0.560	14.30	0.186	4.72	1.610	0.28	0.376	9.53	0.605	2.69	0.135	3.42	0.016	0.41	8.2	316 SS	CG	P
0.218	5.54	60930S	0.630	15.88	0.186	4.72	1.440	0.25	0.420	10.66	0.605	2.69	0.147	3.72	0.016	0.41	8.9	316 SS	CG	P
0.218	5.54	60931S	0.750	19.05	0.186	4.72	1.190	0.21	0.508	12.92	0.605	2.69	0.171	4.33	0.016	0.41	10.4	316 SS	CG	P
0.218	5.54	60932S	0.880	22.23	0.186	4.72	1.010	0.18	0.597	15.10	0.605	2.69	0.194	4.94	0.016	0.41	11.8	316 SS	CG	P
0.218	5.54	60933S	1.000	25.40	0.186	4.72	0.880	0.16	0.685	17.34	0.605	2.69	0.218	5.55	0.016	0.41	13.3	316 SS	CG	P
0.218	5.54	60934S	1.250	31.75	0.186	4.72	0.700	0.12	0.862	21.85	0.605	2.69	0.266	6.76	0.0					



316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm		Wire Dia. Inches mm		Total Coils	Mat'l	Ends	Finish	
0.218	5.54	61154S	0.500	12.70	0.178	4.52	5.490	0.96	0.210	5.33	1.152	5.12	0.138	3.50	0.020	0.51	6.7	316 SS CG P
0.218	5.54	61155S	0.560	14.30	0.178	4.52	4.830	0.85	0.239	6.06	1.154	5.13	0.151	3.84	0.020	0.51	7.3	316 SS CG P
0.218	5.54	61156S	0.630	15.88	0.178	4.52	4.320	0.76	0.267	6.78	1.152	5.12	0.164	4.17	0.020	0.51	8	316 SS CG P
0.218	5.54	61157S	0.690	17.48	0.178	4.52	3.900	0.68	0.296	7.51	1.153	5.12	0.177	4.50	0.020	0.51	8.6	316 SS CG P
0.218	5.54	61158S	0.750	19.05	0.178	4.52	3.560	0.62	0.324	8.22	1.152	5.12	0.190	4.84	0.020	0.51	9.2	316 SS CG P
0.218	5.54	61159S	0.880	22.23	0.178	4.52	3.020	0.53	0.381	9.68	1.152	5.12	0.217	5.50	0.020	0.51	10.5	316 SS CG P
0.218	5.54	61160S	1.000	25.40	0.178	4.52	2.630	0.46	0.438	11.11	1.152	5.12	0.243	6.17	0.020	0.51	11.8	316 SS CG P
0.218	5.54	61161S	1.250	31.75	0.178	4.52	2.090	0.37	0.553	14.04	1.154	5.13	0.296	7.51	0.020	0.51	14.4	316 SS CG P
0.218	5.54	61162S	1.380	34.93	0.178	4.52	1.890	0.33	0.610	15.48	1.154	5.13	0.322	8.17	0.020	0.51	15.6	316 SS CG P
0.218	5.54	61163S	1.500	38.10	0.178	4.52	1.730	0.30	0.667	16.91	1.153	5.12	0.348	8.84	0.020	0.51	16.9	316 SS CG P
0.218	5.54	61164S	1.750	44.45	0.178	4.52	1.480	0.26	0.781	19.86	1.153	5.12	0.401	10.17	0.020	0.51	19.5	316 SS CG P
0.218	5.54	61547S	0.250	6.35	0.162	4.12	45.590	7.99	0.067	1.70	3.055	13.58	0.129	3.26	0.028	0.71	4.5	316 SS CG P
0.218	5.54	61548S	0.310	7.95	0.162	4.12	34.420	6.03	0.088	2.25	3.029	13.46	0.152	3.85	0.028	0.71	5.3	316 SS CG P
0.218	5.54	61549S	0.380	9.53	0.162	4.12	27.730	4.86	0.110	2.79	3.050	13.56	0.174	4.42	0.028	0.71	6	316 SS CG P
0.218	5.54	61550S	0.440	11.13	0.162	4.12	23.150	4.06	0.131	3.34	3.033	13.48	0.197	5.01	0.028	0.71	6.8	316 SS CG P
0.218	5.54	61551S	0.500	12.70	0.162	4.12	19.920	3.49	0.153	3.88	3.048	13.55	0.220	5.58	0.028	0.71	7.6	316 SS CG P
0.218	5.54	61552S	0.560	14.30	0.162	4.12	17.450	3.06	0.174	4.43	3.035	13.49	0.243	6.16	0.028	0.71	8.4	316 SS CG P
0.218	5.54	61553S	0.630	15.88	0.162	4.12	15.540	2.72	0.196	4.97	3.047	13.54	0.265	6.74	0.028	0.71	9.2	316 SS CG P
0.218	5.54	61554S	0.690	17.48	0.162	4.12	14.000	2.45	0.218	5.52	3.051	13.56	0.288	7.33	0.028	0.71	10	316 SS CG P
0.218	5.54	61555S	0.750	19.05	0.162	4.12	12.750	2.23	0.239	6.06	3.046	13.54	0.311	7.90	0.028	0.71	10.8	316 SS CG P
0.218	5.54	61556S	0.880	22.23	0.162	4.12	10.800	1.89	0.282	7.16	3.045	13.53	0.357	9.06	0.028	0.71	12.4	316 SS CG P
0.218	5.54	61557S	1.000	25.40	0.162	4.12	9.370	1.64	0.325	8.25	3.045	13.53	0.402	10.22	0.028	0.71	14	316 SS CG P
0.218	5.54	61558S	1.250	31.75	0.162	4.12	7.410	1.30	0.411	10.43	3.045	13.53	0.494	12.54	0.028	0.71	17.1	316 SS CG P
0.218	5.54	61559S	1.380	34.93	0.162	4.12	6.710	1.17	0.454	11.53	3.045	13.53	0.539	13.70	0.028	0.71	18.7	316 SS CG P
0.218	5.54	61560S	1.500	38.10	0.162	4.12	6.130	1.07	0.497	12.61	3.044	13.53	0.585	14.85	0.028	0.71	20.3	316 SS CG P
0.218	5.54	61561S	1.750	44.45	0.162	4.12	5.220	0.91	0.583	14.80	3.044	13.53	0.676	17.17	0.028	0.71	23.5	316 SS CG P
0.219	5.56	64006S	0.810	20.57	0.155	3.94	14.317	2.51	0.298	7.57	4.266	18.98	0.512	13.01	0.032	0.81	16	316 SS CG P
0.219	5.56	66776S	0.250	6.35	0.179	4.55	12.689	2.22	0.089	2.26	1.129	5.02	0.100	2.54	0.020	0.51	4	316 SS C P
0.219	5.56	66777S	0.310	7.87	0.177	4.50	12.527	2.19	0.104	2.64	1.303	5.80	0.095	2.41	0.021	0.53	4.5	316 SS CG P
0.219	5.56	66778S	0.310	7.87	0.197	5.00	0.226	0.04	0.178	4.52	0.040	0.18	0.132	3.35	0.011	0.28	11	316 SS C P
0.219	5.56	66779S	0.310	7.87	0.169	4.29	16.719	2.93	0.131	3.33	2.190	9.74	0.175	4.45	0.025	0.64	6	316 SS C P
0.219	5.56	66780S	0.340	8.64	0.179	4.55	5.076	0.89	0.180	4.57	0.914	4.07	0.160	4.06	0.020	0.51	7	316 SS C P
0.219	5.56	66781S	0.380	9.65	0.185	4.70	4.222	0.74	0.166	4.22	0.701	3.12	0.102	2.59	0.017	0.43	5	316 SS C P
0.219	5.56	66782S	0.380	9.65	0.175	4.45	7.660	1.34	0.196	4.98	1.501	6.68	0.176	4.47	0.022	0.56	7	316 SS C P
0.219	5.56	66783S	0.410	10.41	0.163	4.14	27.567	4.82	0.110	2.79	3.032	13.49	0.168	4.27	0.028	0.71	6	316 SS CG P
0.219	5.56	66784S	0.410	10.41	0.179	4.55	8.460	1.48	0.134	3.40	1.134	5.04	0.100	2.54	0.020	0.51	5	316 SS CG P
0.219	5.56	66785S	0.410	10.41	0.157	3.99	43.433	7.60	0.094	2.39	4.083	18.16	0.186	4.72	0.031	0.79	6	316 SS CG P
0.219	5.56	66786S	0.410	10.41	0.199	5.06	0.171	0.03	0.300	7.62	0.051	0.23	0.110	2.79	0.010	0.25	10	316 SS C P
0.219	5.56	66787S	0.420	10.67	0.171	4.34	7.990	1.40	0.180	4.57	1.438	6.40	0.240	6.10	0.024	0.61	9	316 SS C P
0.219	5.56	66788S	0.440	11.18	0.179	4.55	8.460	1.48	0.134	3.40	1.134	5.04	0.120	3.05	0.020	0.51	5	316 SS C P
0.219	5.56	66789S	0.440	11.18	0.169	4.29	8.359	1.46	0.165	4.19	1.379	6.13	0.275	6.99	0.025	0.64	10	316 SS C P
0.219	5.56	66790S	0.440	11.18	0.191	4.85	0.929	0.16	0.314	7.98	0.292	1.30	0.126	3.20	0.014	0.36	8	316 SS C P
0.219	5.56	66791S	0.440	11.18	0.183	4.65	2.693	0.47	0.278	7.06	0.749	3.33	0.162	4.12	0.018	0.46	8	316 SS C P
0.219	5.56	66792S	0.440	11.18	0.199	5.06	0.342	0.06	0.370	9.40	0.127	0.57	0.070	1.78	0.010	0.25	6	316 SS C P
0.219	5.56	66793S	0.470	11.94	0.143	3.63	109.888	19.23	0.067	1.70	7.362	32.75	0.266	6.76	0.038	0.97	6	316 SS C P
0.219	5.56	66794S	0.500	12.70	0.179	4.55	6.345	1.11	0.179	4.55	1.136	5.05	0.140	3.56	0.020	0.51	6	316 SS C P
0.219	5.56	66795S	0.500	12.70	0.177	4.50	4.041	0.71	0.274	6.96	1.107	4.92	0.226	5.74	0.021	0.53	9.8	316 SS C P
0.219	5.56	66796S	0.500	12.70	0.161	4.09	25.779	4.51	0.131	3.33	3.377	15.02	0.232	5.89	0.029	0.74	7	316 SS C P
0.219	5.56	66797S	0.500	12.70	0.179	4.55	4.414	0.77	0.257	6.53	1.134	5.04	0.175	4.45	0.020	0.51	7.8	316 SS C P
0.219	5.56	66798S	0.500	12.70	0.187	4.75	1.507	0.26	0.348	8.84	0.524	2.33	0.152	3.86	0.016	0.41	8.5	316 SS C P
0.219	5.56	66799S	0.500	12.70	0.179	4.55	3.626	0.64	0.313	7.95	1.135	5.05	0.180	4.57	0.020	0.51	9	316 SS CG P
0.219	5.56	66800S	0.500	12.70	0.169	4.29	11.146	1.95	0.196	4.98	2.185	9.72	0.225	5.72	0.025	0.64	8	316 SS C P
0.219	5.56	66801S	0.530	13.46	0.193	4.90	0.908	0.16	0.356	9.04	0.323	1.44	0.098	2.49	0.013	0.33	6.5	316 SS C P
0.219	5.56	66802S	0.530	13.46	0.203	5.16	0.084	0.02	0.454	11.53	0.038	0.17	0.076	1.93	0.008	0.20	8.5	316 SS C P
0.219	5.56	66803S	0.530	13.46	0.163	4.14	16.964	2.97	0.179	4.55	3.037	13.51	0.238	6.05	0.028	0.71	8.5	316 SS CG P
0.219	5.56	66804S	0.560	14.22	0.199	5.06	0.140	0.03	0.432	10.97	0.060	0.27	0.128	3.25	0.010	0.25	11.8	316 SS C P
0.219	5.56	6																



316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg Max. Defl. Inches	Sugg Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish
mm		mm	mm	N/mm	mm	N	mm	mm				
0.219	5.56	66824S	0.750	19.05	0.159	4.04	16.664	2.92	0.223	5.66	3.716	16.53
0.219	5.56	66825S	0.750	19.05	0.189	4.80	0.621	0.11	0.525	13.34	0.326	1.45
0.219	5.56	66826S	0.780	19.81	0.155	3.94	20.044	3.51	0.224	5.69	4.490	19.97
0.219	5.56	66827S	0.810	20.57	0.149	3.79	44.609	7.81	0.131	3.33	5.844	25.99
0.219	5.56	66828S	0.840	21.34	0.163	4.14	15.752	2.76	0.193	4.90	3.040	13.52
0.219	5.56	66829S	0.880	22.35	0.139	3.53	50.722	8.88	0.169	4.29	8.572	38.13
0.219	5.56	66830S	0.880	22.35	0.167	4.24	15.891	2.78	0.154	3.91	2.447	10.88
0.219	5.56	66831S	0.880	22.35	0.163	4.14	8.482	1.48	0.359	9.12	3.045	13.54
0.219	5.56	66832S	0.910	23.11	0.179	4.55	2.207	0.39	0.513	13.03	1.132	5.04
0.219	5.56	66833S	0.940	23.88	0.157	3.99	11.982	2.10	0.342	8.69	4.098	18.23
0.219	5.56	66834S	0.940	23.88	0.157	3.99	11.582	2.03	0.354	8.99	4.100	18.24
0.219	5.56	66835S	0.970	24.64	0.161	4.09	9.548	1.67	0.354	8.99	3.380	15.03
0.219	5.56	66836S	1.000	25.40	0.175	4.45	3.246	0.57	0.463	11.76	1.503	6.69
0.219	5.56	66837S	1.000	25.40	0.187	4.75	1.399	0.25	0.419	10.64	0.586	2.61
0.219	5.56	66838S	1.000	25.40	0.183	4.65	2.085	0.37	0.398	10.11	0.830	3.69
0.219	5.56	66839S	1.000	25.40	0.171	4.34	5.707	1.00	0.340	8.64	1.940	8.63
0.219	5.56	66840S	1.000	25.40	0.163	4.14	9.758	1.71	0.312	7.93	3.044	13.54
0.219	5.56	66841S	1.000	25.40	0.167	4.24	5.480	0.96	0.447	11.35	2.450	10.90
0.219	5.56	66842S	1.000	25.40	0.179	4.55	2.884	0.51	0.393	9.98	1.133	5.04
0.219	5.56	66843S	1.000	25.40	0.183	4.65	1.701	0.30	0.488	12.40	0.830	3.69
0.219	5.56	66844S	1.000	25.40	0.183	4.65	1.616	0.28	0.514	13.06	0.831	3.70
0.219	5.56	66845S	1.000	25.40	0.163	4.14	8.821	1.54	0.345	8.76	3.043	13.54
0.219	5.56	66846S	1.000	25.40	0.169	4.29	6.688	1.17	0.327	8.31	2.187	9.73
0.219	5.56	66847S	1.060	26.92	0.163	4.14	10.024	1.75	0.304	7.72	3.047	13.55
0.219	5.56	66848S	1.160	29.46	0.147	3.73	22.839	4.00	0.277	7.04	6.326	28.14
0.219	5.56	66849S	1.160	29.46	0.159	4.04	14.997	2.62	0.248	6.30	3.719	16.54
0.219	5.56	66850S	1.190	30.23	0.171	4.34	3.496	0.61	0.554	14.07	1.937	8.62
0.219	5.56	66851S	1.250	31.75	0.183	4.65	1.469	0.26	0.565	14.35	0.830	3.69
0.219	5.56	66852S	1.250	31.75	0.179	4.55	2.207	0.39	0.514	13.06	1.134	5.04
0.219	5.56	66853S	1.250	31.75	0.171	4.34	2.663	0.47	0.674	17.12	1.795	7.98
0.219	5.56	66854S	1.250	31.75	0.163	4.14	8.821	1.54	0.345	8.76	3.043	13.54
0.219	5.56	66855S	1.310	33.27	0.163	4.14	8.615	1.51	0.353	8.97	3.041	13.53
0.219	5.56	66856S	1.380	35.05	0.187	4.75	0.999	0.18	0.587	14.91	0.586	2.61
0.219	5.56	66857S	1.380	35.05	0.183	4.65	1.496	0.26	0.555	14.10	0.830	3.69
0.219	5.56	66858S	1.380	35.05	0.171	4.34	4.053	0.71	0.478	12.14	1.937	8.62
0.219	5.56	66859S	1.380	35.05	0.163	4.14	6.979	1.22	0.436	11.07	3.043	13.54
0.219	5.56	66860S	1.380	35.05	0.179	4.55	1.336	0.23	0.849	21.57	1.134	5.04
0.219	5.56	66861S	1.380	35.05	0.179	4.55	2.063	0.36	0.550	13.97	1.135	5.05
0.219	5.56	66862S	1.380	35.05	0.171	4.34	3.233	0.57	0.600	15.24	1.940	8.63
0.219	5.56	66863S	1.500	38.10	0.195	4.95	0.248	0.04	1.028	26.11	0.255	1.13
0.219	5.56	66864S	1.500	38.10	0.183	4.65	1.469	0.26	0.565	14.35	0.830	3.69
0.219	5.56	66865S	1.500	38.10	0.169	4.29	4.180	0.73	0.523	13.28	2.186	9.72
0.219	5.56	66866S	1.500	38.10	0.159	4.04	7.499	1.31	0.497	12.62	3.727	16.58
0.219	5.56	66867S	1.500	38.10	0.169	4.29	3.344	0.59	0.654	16.61	2.187	9.73
0.219	5.56	66868S	1.630	41.40	0.179	4.55	1.692	0.30	0.670	17.02	1.134	5.04
0.219	5.56	66869S	1.720	43.69	0.183	4.65	0.898	0.16	0.924	23.47	0.830	3.69
0.219	5.56	66870S	1.750	44.45	0.189	4.80	0.497	0.09	0.994	25.25	0.494	2.20
0.219	5.56	66871S	1.750	44.45	0.187	4.75	0.783	0.14	0.748	19.00	0.586	2.61
0.219	5.56	66872S	1.750	44.45	0.183	4.65	1.154	0.20	0.719	18.26	0.830	3.69
0.219	5.56	66873S	1.750	44.45	0.171	4.34	3.142	0.55	0.617	15.67	1.939	8.63
0.219	5.56	66874S	1.750	44.45	0.163	4.14	5.379	0.94	0.566	14.38	3.045	13.54
0.219	5.56	66875S	1.750	44.45	0.179	4.55	1.606	0.28	0.706	17.93	1.134	5.04
0.219	5.56	66876S	1.880	47.75	0.171	4.34	3.995	0.70	0.485	12.32	1.938	8.62
0.219	5.56	66877S	2.190	55.63	0.163	4.14	2.940	0.52	1.035	26.29	3.043	13.54
0.219	5.56	68045S	0.380	9.65	0.139	3.53	123.988	21.70	0.069	1.75	8.555	38.05
0.219	5.56	68046S	0.410	10.41	0.143	3.63	109.888	19.23	0.067	1.70	7.362	32.75
0.219	5.56	68047S	0.440	11.18	0.141	3.58	93.030	16.28	0.085	2.16	7.908	35.18
0.219	5.56	68048S	0.440	11.18	0.139	3.53	185.981	32.55	0.046	1.17	8.555	38.05
0.219	5.56	68049S	0.470	11.94	0.143	3.63	70.328	12.31	0.105	2.67	7.384	32.84
0.219	5.56	68050S	0.500	12.70	0.139	3.53	185.981	32.55	0.046	1.17	8.555	38.05
0.219	5.56	68052S	0.500	12.70	0.139	3.53	111.589	19.53	0.077	1.96	8.592	38.22
0.219	5.56	68053S	0.530	13.46	0.139	3.53	69.743	12.21	0.123	3.12	8.578	38.16
0.219	5.56	68054S	0.560	14.22	0.147	3.73	57.097	9.99	0.111	2.82	6.338	28.19
0.219	5.56	68055S	0.590	14.99	0.147	3.73	48.941	8.57	0.129	3.28	6.313	28.08
0.219	5.56	68057S	0.660	16.76	0.149	3.79	28.677	5.02	0.203	5.16	5.821	25.89
0.219	5.56	68058S	0.690	17.53	0.147	3.73	31.144	5.45	0.203	5.16	6.322	28.12
0.219	5.56	68059S	0.690	17.53	0.139	3.53	61.994	10.85	0.138	3.51	8.555	38.05
0.219	5.56	68062S	0.810	20.57	0.151	3.84	20.294	3.55	0.263	6.68	5.337	23.74
0.219	5.56	68063S	0.840	21.34	0.151	3.84	20.294	3.55	0.264	6.71	5.358	23.83
0.219	5.56	68064S	0.880	22.35	0.139	3.53	46.495	8.14	0.184	4.67	8.555	38.05
0.219	5.56	68065S	1.000	25.40	0.149	3.79	23.162	4.05	0.252	6.40	5.837	25.96
0.219	5.56	68066S	1.060	26.92	0.151	3.84	18.844	3.30	0.284	7.21	5.352	23.81
0.219	5.56	68067S	1.090	27.69	0.141	3.58	30.991	5.42	0.256	6.50	7.934	35.29
0.219	5.56	68068S	1.250	31.75	0.141	3.58	33.057	5.79	0.240	6.10	7.934	35.29
0.219	5.56	68069S	2.280	57.91	0.143	3.63	13.736	2.40	0.538	13.67	7.390	32.87


MATERIAL 316 SS 316 Stainless Steel

ENDS C Closed
CG Closed & Ground

FINISH P Passivated


Can't find what you're looking for? Request a custom quote. Email customquote@centuryspring.com

Century Spring Catalog




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D.		Rate		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length		Wire Dia. Inches mm		Total Coils	Mat'l	Ends	Finish	
		Inches	mm	Inches	mm	Lbs./In.	N/mm			Inches	mm					C	P	
0.219	5.56	68070S	2.440	61.98	0.133	3.38	32.661	5.72	0.314	7.98	10.256	45.62	1.161	29.49	0.043	1.09	26	316 SS C P
0.219	5.56	68056S	0.630	16.00	0.119	3.02	269.761	47.21	0.057	1.45	15.376	68.39	0.400	10.16	0.050	1.27	8	316 SS CG P
0.219	5.56	68060S	0.690	17.53	0.124	3.15	210.252	36.79	0.063	1.60	13.246	58.92	0.428	10.87	0.048	1.21	8	316 SS C P
0.234	5.94	64007S	0.310	7.87	0.170	4.32	31.804	5.57	0.054	1.37	1.717	7.64	0.256	6.50	0.032	0.81	7	316 SS C P
0.234	5.94	66878S	0.160	4.06	0.198	5.03	4.735	0.83	0.056	1.42	0.265	1.18	0.104	2.64	0.018	0.46	4.8	316 SS C P
0.234	5.94	66879S	0.310	7.87	0.210	5.33	0.948	0.17	0.244	6.20	0.231	1.03	0.066	1.68	0.012	0.31	4.5	316 SS C P
0.234	5.94	66880S	0.310	7.87	0.178	4.52	29.297	5.13	0.098	2.49	2.871	12.77	0.140	3.56	0.028	0.71	5	316 SS CG P
0.234	5.94	66881S	0.310	7.87	0.176	4.47	34.207	5.99	0.093	2.36	3.181	14.15	0.145	3.68	0.029	0.74	5	316 SS CG P
0.234	5.94	66882S	0.310	7.87	0.194	4.93	5.831	1.02	0.180	4.57	1.050	4.67	0.130	3.30	0.020	0.51	5.5	316 SS C P
0.234	5.94	66883S	0.380	9.65	0.208	5.28	1.103	0.19	0.275	6.99	0.303	1.35	0.078	1.98	0.013	0.33	5	316 SS C P
0.234	5.94	66884S	0.380	9.65	0.186	4.72	16.284	2.85	0.112	2.85	1.824	8.11	0.114	2.90	0.024	0.61	4.8	316 SS CG P
0.234	5.94	66885S	0.380	9.65	0.194	4.93	1.701	0.30	0.100	2.54	0.170	0.76	0.280	7.11	0.020	0.51	14	316 SS CG P
0.234	5.94	66886S	0.380	9.65	0.202	5.13	3.163	0.55	0.174	4.42	0.550	2.45	0.088	2.24	0.016	0.41	4.5	316 SS C P
0.234	5.94	66887S	0.410	10.41	0.170	4.32	31.804	5.57	0.133	3.38	4.230	18.82	0.256	6.50	0.032	0.81	7	316 SS C P
0.234	5.94	66888S	0.410	10.41	0.186	4.72	11.195	1.96	0.163	4.14	1.825	8.12	0.168	4.27	0.024	0.61	6	316 SS C P
0.234	5.94	66889S	0.420	10.67	0.170	4.32	31.804	5.57	0.133	3.38	4.230	18.82	0.256	6.50	0.032	0.81	7	316 SS C P
0.234	5.94	66890S	0.440	11.18	0.186	4.72	11.195	1.96	0.163	4.14	1.825	8.12	0.168	4.27	0.024	0.61	6	316 SS C P
0.234	5.94	66891S	0.440	11.18	0.174	4.42	19.877	3.48	0.170	4.32	3.379	15.03	0.270	6.86	0.030	0.76	8	316 SS C P
0.234	5.94	66892S	0.440	11.18	0.176	4.47	15.788	2.76	0.193	4.90	3.047	13.55	0.247	6.27	0.029	0.74	8.5	316 SS CG P
0.234	5.94	66893S	0.440	11.18	0.184	4.67	13.371	2.34	0.154	3.91	2.059	9.16	0.175	4.45	0.025	0.64	6	316 SS C P
0.234	5.94	66894S	0.450	11.43	0.170	4.32	39.755	6.96	0.106	2.69	4.214	18.74	0.224	5.69	0.032	0.81	6	316 SS C P
0.234	5.94	66895S	0.450	11.43	0.172	4.37	39.428	6.90	0.098	2.49	3.864	17.19	0.202	5.13	0.031	0.79	5.5	316 SS C P
0.234	5.94	66896S	0.470	11.94	0.172	4.37	34.499	6.04	0.112	2.85	3.864	17.19	0.217	5.51	0.031	0.79	6	316 SS C P
0.234	5.94	66897S	0.470	11.94	0.174	4.42	31.803	5.57	0.110	2.79	3.498	15.56	0.203	5.16	0.030	0.76	5.8	316 SS C P
0.234	5.94	66898S	0.470	11.94	0.210	5.33	0.395	0.07	0.362	9.20	0.143	0.64	0.108	2.74	0.012	0.31	8	316 SS C P
0.234	5.94	66899S	0.470	11.94	0.190	4.83	8.195	1.43	0.172	4.37	1.410	6.27	0.127	3.23	0.022	0.56	5.8	316 SS CG P
0.234	5.94	66900S	0.500	12.70	0.178	4.52	16.490	2.89	0.174	4.42	2.869	12.76	0.205	5.21	0.028	0.71	7.3	316 SS CG P
0.234	5.94	66901S	0.500	12.70	0.220	5.59	0.026	0.01	0.409	10.39	0.011	0.05	0.091	2.31	0.007	0.18	12	316 SS C P
0.234	5.94	66902S	0.500	12.70	0.170	4.32	27.656	4.84	0.153	3.89	4.231	18.82	0.280	7.11	0.032	0.81	7.8	316 SS C P
0.234	5.94	66903S	0.500	12.70	0.176	4.47	17.104	2.99	0.186	4.72	3.181	14.15	0.232	5.89	0.029	0.74	8	316 SS CG P
0.234	5.94	66904S	0.500	12.70	0.194	4.93	6.802	1.19	0.156	3.96	1.061	4.72	0.100	2.54	0.020	0.51	5	316 SS CG P
0.234	5.94	66905S	0.500	12.70	0.190	4.83	7.683	1.35	0.183	4.65	1.406	6.25	0.154	3.91	0.022	0.56	6	316 SS C P
0.234	5.94	66906S	0.500	12.70	0.184	4.67	7.641	1.34	0.269	6.83	2.055	9.14	0.225	5.72	0.025	0.64	9	316 SS CG P
0.234	5.94	66907S	0.530	13.46	0.212	5.39	0.550	0.10	0.335	8.51	0.184	0.82	0.066	1.68	0.011	0.28	5	316 SS C P
0.234	5.94	66908S	0.530	13.46	0.164	4.17	59.506	10.41	0.092	2.34	5.475	24.35	0.210	5.33	0.035	0.89	6	316 SS CG P
0.234	5.94	66909S	0.530	13.46	0.194	4.93	3.710	0.65	0.287	7.29	1.065	4.74	0.170	4.32	0.020	0.51	7.5	316 SS C P
0.234	5.94	66910S	0.560	14.22	0.178	4.52	13.522	2.37	0.212	5.39	2.867	12.75	0.238	6.05	0.028	0.71	8.5	316 SS CG P
0.234	5.94	66911S	0.560	14.22	0.186	4.72	7.464	1.31	0.244	6.20	1.821	8.10	0.216	5.49	0.024	0.61	8	316 SS C P
0.234	5.94	66912S	0.560	14.22	0.178	4.52	18.503	3.24	0.155	3.94	2.868	12.76	0.217	5.51	0.028	0.71	6.8	316 SS C P
0.234	5.94	66913S	0.590	14.99	0.208	5.28	0.662	0.12	0.458	11.63	0.303	1.35	0.104	2.64	0.013	0.33	7	316 SS C P
0.234	5.94	66914S	0.590	14.99	0.190	4.83	6.470	1.13	0.218	5.54	1.410	6.27	0.171	4.34	0.022	0.56	6.8	316 SS C P
0.234	5.94	66915S	0.630	16.00	0.174	4.42	15.902	2.78	0.220	5.59	3.498	15.56	0.285	7.24	0.030	0.76	9.5	316 SS CG P
0.234	5.94	66916S	0.630	16.00	0.178	4.52	13.522	2.37	0.212	5.39	2.867	12.75	0.266	6.76	0.028	0.71	8.5	316 SS C P
0.234	5.94	66917S	0.630	16.00	0.174	4.42	17.038	2.98	0.206	5.23	3.510	15.61	0.270	6.86	0.030	0.76	9	316 SS CG P
0.234	5.94	66918S	0.630	16.00	0.190	4.83	3.235	0.57	0.355	9.02	1.148	5.11	0.275	6.99	0.022	0.56	11.5	316 SS C P
0.234	5.94	66919S	0.660	16.76	0.194	4.93	2.551	0.45	0.417	10.59	1.064	4.73	0.220	5.59	0.020	0.51	10	316 SS C P
0.234	5.94	66920S	0.660	16.76	0.174	4.42	17.038	2.98	0.206	5.23	3.510	15.61	0.270	6.86	0.030	0.76	9	316 SS CG P
0.234	5.94	66921S	0.690	17.53	0.200	5.08	1.460	0.26	0.451	11.46	0.658	2.93	0.170	4.32	0.017	0.43	9	316 SS C P
0.234	5.94	66922S	0.690	17.53	0.178	4.52	14.648	2.56	0.196	4.98	2.871	12.77	0.224	5.69	0.028	0.71	8	316 SS CG P
0.234	5.94	66923S	0.690	17.53	0.158	4.01	43.270	7.57	0.161	4.09	6.966	30.99	0.418	10.62	0.038	0.97	10	316 SS C P
0.234	5.94	66925S	0.690	17.53	0.190	4.83	3.073	0.54	0.404	10.26	1.241	5.52	0.286	7.26	0.022	0.56	12	316 SS C P
0.234	5.94	66926S	0.720	18.29	0.214	5.44	0.171	0.03	0.625	15.88	0.107	0.48	0.095	2.41	0.010	0.25	8.5	316 SS C P
0.234	5.94	66927S	0.720	18.29	0.182	4.62	11.039	1.93	0.209	5.31	2.307	10.26	0.228	5.79	0.026	0.66	7.8	316 SS C P
0.234	5.94	66928S	0.720	18.29	0.174	4.42	11.926	2.09	0.294	7.47	3.506	15.60	0.360	9.14	0.030	0.76	12	316 SS CG P
0.234	5.94	66929S	0.750	19.05	0.184	4.67	5.348	0.94	0.384	9.75	2.054	9.14	0.325	8.26	0.025	0.64	12	316 SS C P
0.234	5.94	66930S	0.750	19.05	0.198	5.03	1.628	0.29	0.									




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg Max. Defl. Inches	Sugg Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish								
mm		mm	mm	N/mm	mm	N	mm	mm												
0.234	5.94	66950S	1.000	25.40	0.186	4.72	4.071	0.71	0.448	11.38	1.824	8.11	0.336	8.53	0.024	0.61	13	316 SS	C	P
0.234	5.94	66951S	1.000	25.40	0.186	4.72	4.071	0.71	0.448	11.38	1.824	8.11	0.336	8.53	0.024	0.61	13	316 SS	C	P
0.234	5.94	66952S	1.000	25.40	0.202	5.13	0.719	0.13	0.764	19.41	0.549	2.44	0.224	5.69	0.016	0.41	13	316 SS	C	P
0.234	5.94	66953S	1.000	25.40	0.174	4.42	7.454	1.30	0.460	11.68	3.429	15.25	0.540	13.72	0.030	0.76	18	316 SS	CG	P
0.234	5.94	66954S	1.030	26.16	0.190	4.83	3.073	0.54	0.459	11.66	1.411	6.28	0.286	7.26	0.022	0.56	12	316 SS	C	P
0.234	5.94	66955S	1.060	26.92	0.194	4.93	2.267	0.40	0.469	11.91	1.063	4.73	0.240	6.10	0.020	0.51	11	316 SS	C	P
0.234	5.94	66956S	1.090	27.69	0.178	4.52	5.859	1.03	0.489	12.42	2.865	12.74	0.476	12.09	0.028	0.71	17	316 SS	CG	P
0.234	5.94	66957S	1.130	28.70	0.208	5.28	0.236	0.04	0.909	23.09	0.215	0.96	0.221	5.61	0.013	0.33	16	316 SS	C	P
0.234	5.94	66958S	1.130	28.70	0.182	4.62	5.771	1.01	0.399	10.14	2.303	10.24	0.364	9.25	0.026	0.66	13	316 SS	C	P
0.234	5.94	66959S	1.190	30.23	0.178	4.52	5.859	1.03	0.490	12.45	2.871	12.77	0.504	12.80	0.028	0.71	17	316 SS	C	P
0.234	5.94	66960S	1.190	30.23	0.174	4.42	6.626	1.16	0.529	13.44	3.505	15.59	0.600	15.24	0.030	0.76	20	316 SS	CG	P
0.234	5.94	66961S	1.220	30.99	0.174	4.42	6.626	1.16	0.529	13.44	3.505	15.59	0.630	16.00	0.030	0.76	20	316 SS	C	P
0.234	5.94	66962S	1.230	31.24	0.174	4.42	7.951	1.39	0.441	11.20	3.506	15.60	0.510	12.95	0.030	0.76	17	316 SS	CG	P
0.234	5.94	66963S	1.250	31.75	0.210	5.33	0.132	0.02	0.998	25.35	0.132	0.59	0.252	6.40	0.012	0.31	20	316 SS	C	P
0.234	5.94	66964S	1.310	33.27	0.192	4.88	2.648	0.46	0.464	11.79	1.229	5.47	0.242	6.15	0.021	0.53	11.5	316 SS	CG	P
0.234	5.94	66965S	1.330	33.78	0.178	4.52	5.170	0.91	0.554	14.07	2.864	12.74	0.560	14.22	0.028	0.71	19	316 SS	C	P
0.234	5.94	66966S	1.690	42.93	0.206	5.23	0.110	0.02	1.074	27.28	0.118	0.53	0.616	15.65	0.014	0.36	43	316 SS	C	P
0.234	5.94	66967S	2.000	50.80	0.164	4.17	9.918	1.74	0.554	14.07	5.495	24.44	0.910	23.11	0.035	0.89	26	316 SS	CG	P
0.234	5.94	66968S	2.250	57.15	0.172	4.37	6.273	1.10	0.614	15.60	3.852	17.13	0.775	19.69	0.031	0.79	24	316 SS	C	P
0.234	5.94	66969S	2.250	57.15	0.204	5.18	0.251	0.04	1.845	46.86	0.463	2.06	0.405	10.29	0.015	0.38	26	316 SS	C	P
0.234	5.94	66970S	2.440	61.98	0.182	4.62	4.018	0.70	0.574	14.58	2.306	10.26	0.489	12.42	0.026	0.66	17.8	316 SS	C	P
0.234	5.94	66971S	2.500	63.50	0.174	4.42	4.369	0.77	0.802	20.37	3.504	15.59	0.909	23.09	0.030	0.76	29.3	316 SS	C	P
0.234	5.94	68071S	0.310	7.87	0.170	4.32	79.511	13.91	0.053	1.35	4.214	18.74	0.160	4.06	0.032	0.81	4	316 SS	C	P
0.234	5.94	68073S	0.380	9.65	0.152	3.86	122.833	21.50	0.070	1.78	8.598	38.24	0.246	6.25	0.041	1.04	6	316 SS	CG	P
0.234	5.94	68074S	0.380	9.65	0.156	3.96	120.000	21.00	0.062	1.58	7.440	33.09	0.205	5.21	0.039	0.99	5.3	316 SS	CG	P
0.234	5.94	68075S	0.440	11.18	0.144	3.66	151.846	26.57	0.073	1.85	11.085	49.31	0.315	8.00	0.045	1.14	7	316 SS	CG	P
0.234	5.94	68077S	0.440	11.18	0.154	3.91	125.221	21.91	0.065	1.65	8.139	36.20	0.220	5.59	0.040	1.02	5.5	316 SS	CG	P
0.234	5.94	68078S	0.440	11.18	0.156	3.96	111.429	19.50	0.067	1.70	7.466	33.21	0.215	5.46	0.039	0.99	5.5	316 SS	CG	P
0.234	5.94	68080S	0.470	11.94	0.170	4.32	42.406	7.42	0.100	2.54	4.241	18.86	0.216	5.49	0.032	0.81	5.8	316 SS	C	P
0.234	5.94	68081S	0.500	12.70	0.150	3.81	219.818	38.47	0.041	1.04	9.013	40.09	0.189	4.80	0.042	1.07	4.5	316 SS	CG	P
0.234	5.94	68082S	0.500	12.70	0.152	3.86	122.833	21.50	0.070	1.78	8.598	38.24	0.246	6.25	0.041	1.04	6	316 SS	CG	P
0.234	5.94	68084S	0.500	12.70	0.144	3.66	151.846	26.57	0.073	1.85	11.085	49.31	0.315	8.00	0.045	1.14	7	316 SS	CG	P
0.234	5.94	68085S	0.560	14.22	0.166	4.22	34.800	6.09	0.145	3.68	5.046	22.45	0.272	6.91	0.034	0.86	8	316 SS	CG	P
0.234	5.94	68086S	0.590	14.99	0.144	3.66	138.042	24.16	0.080	2.03	11.043	49.12	0.338	8.59	0.045	1.14	7.5	316 SS	CG	P
0.234	5.94	68087S	0.590	14.99	0.170	4.32	35.338	6.18	0.120	3.05	4.241	18.86	0.240	6.10	0.032	0.81	6.5	316 SS	C	P
0.234	5.94	68088S	0.630	16.00	0.150	3.81	109.909	19.23	0.083	2.11	9.122	40.58	0.336	8.53	0.042	1.07	7	316 SS	C	P
0.234	5.94	68089S	0.630	16.00	0.154	3.91	54.784	9.59	0.148	3.76	8.108	36.06	0.400	10.16	0.040	1.02	10	316 SS	CG	P
0.234	5.94	68090S	0.630	16.00	0.166	4.22	26.100	4.57	0.193	4.90	5.037	22.41	0.340	8.64	0.034	0.86	10	316 SS	CG	P
0.234	5.94	68091S	0.660	16.76	0.166	4.22	29.829	5.22	0.169	4.29	5.041	22.42	0.306	7.77	0.034	0.86	9	316 SS	CG	P
0.234	5.94	68092S	0.690	17.53	0.154	3.91	54.784	9.59	0.148	3.76	8.108	36.06	0.440	11.18	0.040	1.02	10	316 SS	C	P
0.234	5.94	68093S	0.690	17.53	0.144	3.66	108.462	18.98	0.102	2.59	11.063	49.21	0.405	10.29	0.045	1.14	9	316 SS	CG	P
0.234	5.94	68094S	0.720	18.29	0.166	4.22	19.886	3.48	0.254	6.45	5.051	22.47	0.425	10.80	0.034	0.86	12.5	316 SS	CG	P
0.234	5.94	68095S	0.750	19.05	0.156	3.96	45.882	8.03	0.163	4.14	7.479	33.27	0.410	10.41	0.039	0.99	10.5	316 SS	CG	P
0.234	5.94	68096S	0.810	20.57	0.154	3.91	51.562	9.02	0.157	3.99	8.095	36.01	0.420	10.67	0.040	1.02	10.5	316 SS	CG	P
0.234	5.94	68097S	0.810	20.57	0.162	4.12	31.089	5.44	0.191	4.85	5.938	26.41	0.385	9.78	0.036	0.91	10.7	316 SS	CG	P
0.234	5.94	68098S	0.810	20.57	0.152	3.86	51.719	9.05	0.167	4.24	8.637	38.42	0.472	11.99	0.041	1.04	11.5	316 SS	CG	P
0.234	5.94	68099S	0.810	20.57	0.164	4.17	21.639	3.79	0.254	6.45	5.496	24.45	0.455	11.56	0.035	0.89	13	316 SS	CG	P
0.234	5.94	68100S	0.880	22.35	0.154	3.91	79.686	13.95	0.101	2.57	8.048	35.80	0.340	8.64	0.040	1.02	7.5	316 SS	C	P
0.234	5.94	68101S	0.880	22.35	0.170	4.32	15.902	2.78	0.266	6.76	4.230	18.82	0.384	9.75	0.032	0.81	12	316 SS	CG	P
0.234	5.94	68102S	0.910	23.11	0.166	4.22	21.306	3.73	0.237	6.02	5.050	22.46	0.401	10.19	0.034	0.86	11.8	316 SS	CG	P
0.234	5.94	68103S	0.970	24.64	0.158	4.01	34.616	6.06	0.201	5.11	6.958	30.95	0.456	11.58	0.038	0.97	12	316 SS	CG	P
0.234	5.94	68104S	1.000	25.40	0.166	4.22	17.400	3.05	0.290	7.37	5.046	22.45	0.510	12.95	0.034	0.86	14	316 SS	C	P
0.234	5.94	68105S	1.000	25.40	0.162	4.12	22.539	3.94	0.264	6.71	5.950	26.47	0.540	13.72	0.036	0.91	14	316 SS	C	P
0.234	5.94	68106S	1.000																	




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm		Wire Dia. Inches mm		Total Coils	E N D S M a t' l'	F n d s h		
0.240	6.10	60951S	1.250	31.75	0.208	5.28	0.900	0.16	0.612	15.49	0.551	2.45	0.163	4.14	0.016	0.41	10.1	316 SS CG P
0.240	6.10	60952S	1.500	38.10	0.208	5.28	0.800	0.14	0.689	17.49	0.551	2.45	0.190	4.83	0.016	0.41	11.1	316 SS CG P
0.240	6.10	60953S	1.750	44.45	0.208	5.28	0.670	0.12	0.826	20.92	0.551	2.45	0.213	5.41	0.016	0.41	12.9	316 SS CG P
0.240	6.10	60954S	2.000	50.80	0.208	5.28	0.580	0.10	0.945	24.00	0.551	2.45	0.239	6.07	0.016	0.41	14.5	316 SS CG P
0.240	6.10	61074S	0.250	6.35	0.204	5.18	7.800	1.37	0.099	2.52	0.772	3.43	0.065	1.65	0.018	0.46	3.5	316 SS CG P
0.240	6.10	61075S	0.310	7.95	0.204	5.18	6.100	1.07	0.127	3.23	0.775	3.44	0.074	1.88	0.018	0.46	4	316 SS CG P
0.240	6.10	61076S	0.380	9.53	0.204	5.18	4.900	0.86	0.158	4.01	0.774	3.44	0.082	2.08	0.018	0.46	4.5	316 SS CG P
0.240	6.10	61077S	0.440	11.13	0.204	5.18	4.200	0.74	0.185	4.68	0.777	3.45	0.091	2.31	0.018	0.46	4.9	316 SS CG P
0.240	6.10	61078S	0.500	12.70	0.204	5.18	3.600	0.63	0.215	5.47	0.774	3.44	0.099	2.51	0.018	0.46	5.3	316 SS CG P
0.240	6.10	61079S	0.560	14.30	0.204	5.18	3.200	0.56	0.242	6.15	0.774	3.44	0.107	2.72	0.018	0.46	5.8	316 SS CG P
0.240	6.10	61080S	0.630	15.88	0.204	5.18	2.800	0.49	0.277	7.03	0.776	3.45	0.115	2.92	0.018	0.46	6.3	316 SS CG P
0.240	6.10	61081S	0.690	17.48	0.204	5.18	2.600	0.46	0.298	7.57	0.775	3.44	0.124	3.15	0.018	0.46	6.6	316 SS CG P
0.240	6.10	61082S	0.750	19.05	0.204	5.18	2.300	0.40	0.337	8.55	0.775	3.44	0.132	3.35	0.018	0.46	7.2	316 SS CG P
0.240	6.10	61083S	0.810	20.65	0.204	5.18	2.100	0.37	0.369	9.36	0.775	3.44	0.140	3.56	0.018	0.46	7.7	316 SS CG P
0.240	6.10	61084S	0.880	22.23	0.204	5.18	2.000	0.35	0.388	9.84	0.776	3.45	0.148	3.76	0.018	0.46	8	316 SS CG P
0.240	6.10	61085S	0.940	23.83	0.204	5.18	1.900	0.33	0.408	10.34	0.775	3.44	0.157	3.99	0.018	0.46	8.3	316 SS CG P
0.240	6.10	61086S	1.000	25.40	0.204	5.18	1.700	0.30	0.456	11.56	0.775	3.44	0.165	4.19	0.018	0.46	9.1	316 SS CG P
0.240	6.10	61087S	1.250	31.75	0.204	5.18	1.400	0.25	0.554	14.06	0.776	3.45	0.198	5.03	0.018	0.46	10.6	316 SS CG P
0.240	6.10	61088S	1.500	38.10	0.204	5.18	1.100	0.19	0.705	17.85	0.776	3.45	0.231	5.87	0.018	0.46	12.9	316 SS CG P
0.240	6.10	61089S	1.750	44.45	0.204	5.18	1.000	0.18	0.775	19.68	0.775	3.44	0.259	6.58	0.018	0.46	14	316 SS CG P
0.240	6.10	61090S	2.000	50.80	0.204	5.18	0.830	0.15	0.930	23.59	0.775	3.44	0.304	7.72	0.018	0.46	16.4	316 SS CG P
0.240	6.10	61165S	0.250	6.35	0.200	5.08	9.200	1.61	0.114	2.90	1.049	4.66	0.082	2.08	0.020	0.51	4	316 SS CG P
0.240	6.10	61166S	0.310	7.95	0.200	5.08	7.200	1.26	0.146	3.71	1.051	4.67	0.094	2.39	0.020	0.51	4.6	316 SS CG P
0.240	6.10	61167S	0.380	9.53	0.200	5.08	5.600	0.98	0.188	4.76	1.053	4.68	0.108	2.74	0.020	0.51	5.4	316 SS CG P
0.240	6.10	61168S	0.440	11.13	0.200	5.08	4.700	0.82	0.224	5.68	1.053	4.68	0.120	3.05	0.020	0.51	6	316 SS CG P
0.240	6.10	61169S	0.500	12.70	0.200	5.08	4.100	0.72	0.256	6.51	1.050	4.67	0.132	3.35	0.020	0.51	6.6	316 SS CG P
0.240	6.10	61170S	0.560	14.30	0.200	5.08	3.700	0.65	0.284	7.21	1.051	4.67	0.144	3.66	0.020	0.51	7.1	316 SS CG P
0.240	6.10	61171S	0.630	15.88	0.200	5.08	3.200	0.56	0.328	8.35	1.050	4.67	0.158	4.01	0.020	0.51	7.9	316 SS CG P
0.240	6.10	61172S	0.690	17.48	0.200	5.08	2.900	0.51	0.362	9.20	1.050	4.67	0.170	4.32	0.020	0.51	8.5	316 SS CG P
0.240	6.10	61173S	0.750	19.05	0.200	5.08	2.700	0.47	0.389	9.88	1.050	4.67	0.182	4.62	0.020	0.51	9	316 SS CG P
0.240	6.10	61174S	0.810	20.65	0.200	5.08	2.400	0.42	0.438	11.13	1.051	4.67	0.194	4.93	0.020	0.51	9.8	316 SS CG P
0.240	6.10	61175S	0.880	22.23	0.200	5.08	2.200	0.39	0.478	12.14	1.052	4.68	0.208	5.28	0.020	0.51	10.5	316 SS CG P
0.240	6.10	61176S	1.000	25.40	0.200	5.08	2.000	0.35	0.526	13.35	1.052	4.68	0.232	5.89	0.020	0.51	11.4	316 SS CG P
0.240	6.10	61177S	1.250	31.75	0.200	5.08	1.600	0.28	0.657	16.69	1.051	4.67	0.282	7.16	0.020	0.51	13.7	316 SS CG P
0.240	6.10	61178S	1.500	38.10	0.200	5.08	1.300	0.23	0.808	20.50	1.050	4.67	0.332	8.43	0.020	0.51	16.5	316 SS CG P
0.240	6.10	61179S	1.750	44.45	0.200	5.08	1.100	0.19	0.955	24.21	1.051	4.67	0.382	9.70	0.020	0.51	19.1	316 SS CG P
0.240	6.10	61180S	2.000	50.80	0.200	5.08	1.000	0.18	1.051	26.70	1.051	4.67	0.432	10.97	0.020	0.51	20.8	316 SS CG P
0.240	6.10	61270S	0.310	7.95	0.196	4.98	11.700	2.05	0.118	3.01	1.381	6.14	0.097	2.46	0.022	0.56	4.4	316 SS CG P
0.240	6.10	61271S	0.250	6.35	0.196	4.98	15.200	2.66	0.091	2.31	1.383	6.15	0.085	2.16	0.022	0.56	3.9	316 SS CG P
0.240	6.10	61272S	0.380	9.53	0.196	4.98	10.000	1.75	0.139	3.52	1.390	6.18	0.111	2.82	0.022	0.56	4.8	316 SS CG P
0.240	6.10	61273S	0.440	11.13	0.196	4.98	8.300	1.45	0.167	4.24	1.386	6.16	0.122	3.10	0.022	0.56	5.4	316 SS CG P
0.240	6.10	61274S	0.500	12.70	0.196	4.98	7.500	1.31	0.185	4.69	1.388	6.17	0.133	3.38	0.022	0.56	5.8	316 SS CG P
0.240	6.10	61275S	0.560	14.30	0.196	4.98	6.700	1.17	0.207	5.25	1.387	6.16	0.144	3.66	0.022	0.56	6.2	316 SS CG P
0.240	6.10	61276S	0.630	15.88	0.196	4.98	5.800	1.02	0.239	6.06	1.386	6.16	0.155	3.94	0.022	0.56	6.9	316 SS CG P
0.240	6.10	61277S	0.690	17.48	0.196	4.98	5.000	0.88	0.277	7.03	1.385	6.16	0.177	4.50	0.022	0.56	7.7	316 SS CG P
0.240	6.10	61278S	0.750	19.05	0.196	4.98	4.600	0.81	0.301	7.64	1.385	6.16	0.188	4.78	0.022	0.56	8.1	316 SS CG P
0.240	6.10	61279S	0.810	20.65	0.196	4.98	4.200	0.74	0.330	8.37	1.386	6.16	0.199	5.05	0.022	0.56	8.7	316 SS CG P
0.240	6.10	61280S	1.000	25.40	0.196	4.98	3.500	0.61	0.396	10.05	1.386	6.16	0.225	5.72	0.022	0.56	10.1	316 SS CG P
0.240	6.10	61281S	1.250	31.75	0.196	4.98	2.750	0.48	0.504	12.78	1.386	6.16	0.283	7.19	0.022	0.56	12.3	316 SS CG P
0.240	6.10	61282S	1.500	38.10	0.196	4.98	2.300	0.40	0.603	15.29	1.387	6.16	0.324	8.23	0.022	0.56	14.3	316 SS CG P
0.240	6.10	61283S	1.750	44.45	0.196	4.98	1.900	0.33	0.729	18.50	1.385	6.16	0.390	9.91	0.022	0.56	16.9	316 SS CG P
0.240	6.10	61284S	2.000	50.80	0.196	4.98	1.700	0.30	0.815	20.67	1.386	6.16	0.440	11.18	0.022	0.56	18.6	316 SS CG P
0.240	6.10	61393S	0.380	9.53	0.192	4.88	14.200	2.49	0.126	3.19	1.789	7.95	0.130	3.30	0.024	0.61	4.9	316 SS CG P
0.240	6.10	61394S	0.440	11.13	0.192	4.88	12.100	2.12	0.147	3.74	1.779	7.91	0.144	3.66	0.024	0.61	5.4	316 SS CG P
0.240	6.10	61395S	0.500	12.70	0.192	4.88	10.200	1.79	0.175	4.44	1.785	7.93	0.158	4.01	0.024	0.61	6	316 SS CG P
0.240	6.10	61396S	0.560	14.30	0.192	4.88	9.200	1.61	0.194	4.92	1.785	7.93	0.172	4.37	0.024	0.61		




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.240	6.10	61464S	0.880	22.23	0.188	4.78	6.700	1.17	0.336	8.52	2.251	10.00	0.287	7.29	0.026	0.66	10.7	316 SS	CG	P
0.240	6.10	61465S	1.000	25.40	0.188	4.78	6.200	1.09	0.363	9.20	2.251	10.00	0.300	7.62	0.026	0.66	11.4	316 SS	CG	P
0.240	6.10	61466S	1.250	31.75	0.188	4.78	4.900	0.86	0.459	11.65	2.249	10.00	0.367	9.32	0.026	0.66	13.9	316 SS	CG	P
0.240	6.10	61467S	1.500	38.10	0.188	4.78	4.100	0.72	0.548	13.92	2.247	9.99	0.421	10.69	0.026	0.66	16.2	316 SS	CG	P
0.240	6.10	61468S	1.750	44.45	0.188	4.78	3.500	0.61	0.642	16.30	2.247	9.99	0.483	12.27	0.026	0.66	18.7	316 SS	CG	P
0.240	6.10	61469S	2.000	50.80	0.188	4.78	3.000	0.53	0.749	19.03	2.247	9.99	0.545	13.84	0.026	0.66	21.4	316 SS	CG	P
0.240	6.10	61612S	0.380	9.53	0.182	4.62	27.900	4.89	0.113	2.86	3.153	14.01	0.170	4.32	0.029	0.74	5.4	316 SS	CG	P
0.240	6.10	61613S	0.440	11.13	0.182	4.62	23.000	4.03	0.137	3.47	3.151	14.00	0.190	4.83	0.029	0.74	6.1	316 SS	CG	P
0.240	6.10	61614S	0.500	12.70	0.182	4.62	19.700	3.45	0.160	4.05	3.152	14.01	0.210	5.33	0.029	0.74	6.8	316 SS	CG	P
0.240	6.10	61615S	0.560	14.30	0.182	4.62	17.200	3.01	0.183	4.64	3.148	13.99	0.230	5.84	0.029	0.74	7.5	316 SS	CG	P
0.240	6.10	61616S	0.630	15.88	0.182	4.62	15.400	2.70	0.204	5.18	3.142	13.96	0.249	6.32	0.029	0.74	8.1	316 SS	CG	P
0.240	6.10	61617S	0.690	17.48	0.182	4.62	14.000	2.45	0.225	5.70	3.150	14.00	0.268	6.81	0.029	0.74	8.7	316 SS	CG	P
0.240	6.10	61618S	0.750	19.05	0.182	4.62	13.100	2.29	0.240	6.10	3.144	13.97	0.288	7.32	0.029	0.74	9.2	316 SS	CG	P
0.240	6.10	61619S	0.810	20.65	0.182	4.62	11.700	2.05	0.269	6.82	3.147	13.99	0.310	7.87	0.029	0.74	10	316 SS	CG	P
0.240	6.10	61620S	0.880	22.23	0.182	4.62	10.700	1.87	0.294	7.46	3.146	13.98	0.329	8.36	0.029	0.74	10.8	316 SS	CG	P
0.240	6.10	61621S	1.000	25.40	0.182	4.62	9.400	1.65	0.335	8.49	3.149	14.00	0.367	9.32	0.029	0.74	12	316 SS	CG	P
0.240	6.10	61622S	1.250	31.75	0.182	4.62	7.400	1.30	0.425	10.79	3.145	13.98	0.447	11.35	0.029	0.74	14.7	316 SS	CG	P
0.240	6.10	61623S	1.500	38.10	0.182	4.62	6.100	1.07	0.516	13.09	3.148	13.99	0.526	13.36	0.029	0.74	17.4	316 SS	CG	P
0.240	6.10	61624S	1.750	44.45	0.182	4.62	5.200	0.91	0.605	15.35	3.146	13.98	0.607	15.42	0.029	0.74	20.1	316 SS	CG	P
0.240	6.10	61625S	2.000	50.80	0.182	4.62	4.600	0.81	0.684	17.35	3.146	13.98	0.690	17.53	0.029	0.74	22.5	316 SS	CG	P
0.240	6.10	61694S	0.310	7.95	0.176	4.48	51.600	9.04	0.079	2.01	4.076	18.12	0.161	4.09	0.032	0.81	4.8	316 SS	CG	P
0.240	6.10	61695S	0.380	9.53	0.176	4.48	41.700	7.30	0.098	2.49	4.087	18.16	0.177	4.50	0.032	0.81	5.5	316 SS	CG	P
0.240	6.10	61696S	0.440	11.13	0.176	4.48	35.800	6.27	0.114	2.90	4.081	18.14	0.201	5.11	0.032	0.81	6.1	316 SS	CG	P
0.240	6.10	61697S	0.500	12.70	0.176	4.48	30.000	5.25	0.136	3.46	4.080	18.13	0.225	5.72	0.032	0.81	6.9	316 SS	CG	P
0.240	6.10	61698S	0.560	14.30	0.176	4.48	26.700	4.68	0.153	3.89	4.085	18.16	0.249	6.32	0.032	0.81	7.5	316 SS	CG	P
0.240	6.10	61699S	0.630	15.88	0.176	4.48	23.300	4.08	0.176	4.46	4.101	18.23	0.273	6.93	0.032	0.81	8.3	316 SS	CG	P
0.240	6.10	61700S	0.690	17.48	0.176	4.48	20.800	3.64	0.197	4.99	4.098	18.21	0.297	7.54	0.032	0.81	9	316 SS	CG	P
0.240	6.10	61701S	0.750	19.05	0.176	4.48	18.300	3.21	0.224	5.68	4.099	18.22	0.329	8.36	0.032	0.81	10	316 SS	CG	P
0.240	6.10	61702S	0.810	20.65	0.176	4.48	16.700	2.93	0.245	6.22	4.092	18.19	0.353	8.97	0.032	0.81	10.7	316 SS	CG	P
0.240	6.10	61703S	0.880	22.23	0.176	4.48	15.800	2.77	0.259	6.58	4.092	18.19	0.369	9.37	0.032	0.81	11.2	316 SS	CG	P
0.240	6.10	61704S	0.940	23.83	0.176	4.48	14.600	2.56	0.280	7.12	4.088	18.17	0.393	9.98	0.032	0.81	12	316 SS	CG	P
0.240	6.10	61705S	1.000	25.40	0.176	4.48	13.300	2.33	0.308	7.81	4.096	18.20	0.425	10.80	0.032	0.81	13	316 SS	CG	P
0.240	6.10	61706S	1.250	31.75	0.176	4.48	11.200	1.96	0.365	9.28	4.088	18.17	0.491	12.47	0.032	0.81	15	316 SS	CG	P
0.240	6.10	61707S	1.380	34.93	0.176	4.48	10.000	1.75	0.409	10.39	4.090	18.18	0.549	13.94	0.032	0.81	16.6	316 SS	CG	P
0.240	6.10	61708S	1.500	38.10	0.176	4.48	9.200	1.61	0.445	11.29	4.094	18.20	0.588	14.94	0.032	0.81	17.8	316 SS	CG	P
0.240	6.10	61709S	1.750	44.45	0.176	4.48	8.000	1.40	0.512	12.99	4.096	18.20	0.680	17.27	0.032	0.81	20.2	316 SS	CG	P
0.240	6.10	61710S	2.000	50.80	0.176	4.48	7.000	1.23	0.585	14.84	4.095	18.20	0.772	19.61	0.032	0.81	22.8	316 SS	CG	P
0.240	6.10	61711S	0.310	7.95	0.170	4.32	75.000	13.14	0.072	1.82	5.400	24.00	0.192	4.88	0.035	0.89	4.9	316 SS	CG	P
0.240	6.10	61782S	0.380	9.53	0.170	4.32	61.200	10.72	0.088	2.23	5.386	23.94	0.208	5.28	0.035	0.89	5.6	316 SS	CG	P
0.240	6.10	61783S	0.440	11.13	0.170	4.32	50.800	8.90	0.106	2.69	5.385	23.93	0.234	5.94	0.035	0.89	6.3	316 SS	CG	P
0.240	6.10	61784S	0.500	12.70	0.170	4.32	43.300	7.58	0.124	3.16	5.369	23.86	0.260	6.60	0.035	0.89	7	316 SS	CG	P
0.240	6.10	61785S	0.560	14.30	0.170	4.32	37.500	6.57	0.144	3.65	5.400	24.00	0.286	7.26	0.035	0.89	7.8	316 SS	CG	P
0.240	6.10	61786S	0.630	15.88	0.170	4.32	33.300	5.83	0.162	4.10	5.395	23.98	0.313	7.95	0.035	0.89	8.5	316 SS	CG	P
0.240	6.10	61787S	0.690	17.48	0.170	4.32	30.000	5.25	0.180	4.56	5.400	24.00	0.339	8.61	0.035	0.89	9.3	316 SS	CG	P
0.240	6.10	61788S	0.750	19.05	0.170	4.32	26.700	4.68	0.202	5.12	5.393	23.97	0.365	9.27	0.035	0.89	10.2	316 SS	CG	P
0.240	6.10	61789S	0.810	20.65	0.170	4.32	24.400	4.27	0.221	5.60	5.392	23.96	0.392	9.96	0.035	0.89	10.9	316 SS	CG	P
0.240	6.10	61790S	0.880	22.23	0.170	4.32	22.500	3.94	0.239	6.08	5.378	23.90	0.418	10.62	0.035	0.89	11.7	316 SS	CG	P
0.240	6.10	61791S	0.940	23.83	0.170	4.32	20.300	3.56	0.265	6.73	5.380	23.91	0.462	11.73	0.035	0.89	12.7	316 SS	CG	P
0.240	6.10	61792S	1.000	25.40	0.170	4.32	19.200	3.36	0.280	7.12	5.376	23.89	0.490	12.45	0.035	0.89	13.3	316 SS	CG	P
0.240	6.10	61793S	1.250	31.75	0.170	4.32	15.000	2.63	0.359	9.11	5.385	23.93	0.597	15.16	0.035	0.89	16.5	316 SS	CG	P
0.240	6.10	61794S	1.380	34.93	0.170	4.32	13.300	2.33	0.405	10.28	5.387	23.94	0.650	16.51	0.035	0.89	18.4	316 SS	CG	P
0.240	6.10	61795S	1.500	38.10	0.170	4.32	12.300	2.15	0.438	11.11	5.387	23.94	0.702	17.83	0.035	0.89	19.7	316 SS	CG	P
0.240	6.10	61796S	1.750	44.45	0.170	4.32	10.300	1.80	0.523	13.27	5.387	23.94	0.807	20.50	0.035	0.89	23.1	316 SS	CG	P
0.240	6.10	61797S	2.000	50.80	0.170	4.32	9.200													




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm		Wire Dia. Inches mm		Total Coils	E N D S Mat'l	F n s h		
0.240	6.10	61901S	2.500	63.50	0.164	4.16	10.500	1.84	0.658	16.70	6.909	30.71	1.240	31.50	0.038	0.97	32.1	316 SS CG P
0.240	6.10	61950S	0.310	7.95	0.160	4.06	129.100	22.61	0.062	1.57	8.004	35.57	0.214	5.44	0.040	1.02	5.1	316 SS CG P
0.240	6.10	61951S	0.380	9.53	0.160	4.06	101.600	17.79	0.079	1.99	8.026	35.67	0.248	6.30	0.040	1.02	5.9	316 SS CG P
0.240	6.10	61952S	0.440	11.13	0.160	4.06	83.300	14.59	0.096	2.43	7.997	35.54	0.282	7.16	0.040	1.02	6.8	316 SS CG P
0.240	6.10	61953S	0.500	12.70	0.160	4.06	70.000	12.26	0.114	2.90	7.980	35.47	0.314	7.98	0.040	1.02	7.7	316 SS CG P
0.240	6.10	61954S	0.560	14.30	0.160	4.06	61.600	10.79	0.130	3.29	8.008	35.59	0.350	8.89	0.040	1.02	8.5	316 SS CG P
0.240	6.10	61955S	0.630	15.88	0.160	4.06	55.800	9.77	0.143	3.63	7.979	35.46	0.382	9.70	0.040	1.02	9.2	316 SS CG P
0.240	6.10	61956S	0.690	17.48	0.160	4.06	50.000	8.76	0.160	4.05	8.000	35.56	0.414	10.52	0.040	1.02	10	316 SS CG P
0.240	6.10	61957S	0.750	19.05	0.160	4.06	47.500	8.32	0.168	4.27	7.980	35.47	0.430	10.92	0.040	1.02	10.4	316 SS CG P
0.240	6.10	61958S	0.810	20.65	0.160	4.06	40.400	7.08	0.198	5.02	7.999	35.55	0.482	12.24	0.040	1.02	11.9	316 SS CG P
0.240	6.10	61959S	0.880	22.23	0.160	4.06	38.300	6.71	0.208	5.29	7.966	35.40	0.514	13.06	0.040	1.02	12.4	316 SS CG P
0.240	6.10	61960S	0.940	23.83	0.160	4.06	35.000	6.13	0.228	5.79	7.980	35.47	0.550	13.97	0.040	1.02	13.4	316 SS CG P
0.240	6.10	61961S	1.000	25.40	0.160	4.06	32.700	5.73	0.244	6.20	7.979	35.46	0.582	14.78	0.040	1.02	14.2	316 SS CG P
0.240	6.10	61962S	1.130	28.58	0.160	4.06	29.200	5.11	0.273	6.94	7.972	35.43	0.650	16.51	0.040	1.02	15.7	316 SS CG P
0.240	6.10	61963S	1.250	31.75	0.160	4.06	25.800	4.52	0.309	7.86	7.972	35.43	0.715	18.16	0.040	1.02	17.5	316 SS CG P
0.240	6.10	61964S	1.380	34.93	0.160	4.06	22.900	4.01	0.349	8.85	7.992	35.52	0.782	19.86	0.040	1.02	19.5	316 SS CG P
0.240	6.10	61965S	1.500	38.10	0.160	4.06	21.400	3.75	0.373	9.47	7.982	35.48	0.865	21.97	0.040	1.02	20.7	316 SS CG P
0.240	6.10	61966S	1.750	44.45	0.160	4.06	18.100	3.17	0.441	11.20	7.982	35.48	0.982	24.94	0.040	1.02	24.1	316 SS CG P
0.240	6.10	61967S	2.000	50.80	0.160	4.06	16.000	2.80	0.499	12.67	7.984	35.48	1.114	28.30	0.040	1.02	27	316 SS CG P
0.240	6.10	61968S	2.250	57.15	0.160	4.06	13.900	2.43	0.574	14.58	7.979	35.46	1.250	31.75	0.040	1.02	30.8	316 SS CG P
0.240	6.10	61969S	2.500	63.50	0.160	4.06	12.500	2.19	0.639	16.21	7.988	35.50	1.382	35.10	0.040	1.02	34	316 SS CG P
0.240	6.10	62007S	0.380	9.53	0.156	3.96	125.800	22.03	0.071	1.81	8.932	39.70	0.253	6.43	0.042	1.07	6	316 SS CG P
0.240	6.10	62008S	0.440	11.13	0.156	3.96	102.500	17.95	0.087	2.22	8.918	39.64	0.295	7.49	0.042	1.07	6.9	316 SS CG P
0.240	6.10	62009S	0.500	12.70	0.156	3.96	88.300	15.46	0.102	2.58	9.007	40.03	0.327	8.31	0.042	1.07	7.7	316 SS CG P
0.240	6.10	62010S	0.560	14.30	0.156	3.96	78.300	13.71	0.114	2.91	8.926	39.67	0.358	9.09	0.042	1.07	8.4	316 SS CG P
0.240	6.10	62011S	0.630	15.88	0.156	3.96	70.800	12.40	0.127	3.21	8.992	39.96	0.389	9.88	0.042	1.07	9.1	316 SS CG P
0.240	6.10	62012S	0.690	17.48	0.156	3.96	62.500	10.95	0.143	3.64	8.938	39.72	0.421	10.69	0.042	1.07	10	316 SS CG P
0.240	6.10	62013S	0.750	19.05	0.156	3.96	54.100	9.48	0.166	4.21	8.981	39.92	0.484	12.29	0.042	1.07	11.3	316 SS CG P
0.240	6.10	62014S	0.810	20.65	0.156	3.96	50.000	8.76	0.179	4.55	8.950	39.78	0.505	12.83	0.042	1.07	12	316 SS CG P
0.240	6.10	62015S	0.880	22.23	0.156	3.96	46.600	8.16	0.192	4.88	8.947	39.76	0.546	13.87	0.042	1.07	12.8	316 SS CG P
0.240	6.10	62016S	0.940	23.83	0.156	3.96	42.500	7.44	0.211	5.35	8.968	39.86	0.588	14.94	0.042	1.07	13.8	316 SS CG P
0.240	6.10	62017S	1.000	25.40	0.156	3.96	40.000	7.01	0.224	5.69	8.960	39.82	0.621	15.77	0.042	1.07	14.5	316 SS CG P
0.240	6.10	62018S	1.130	28.58	0.156	3.96	35.000	6.13	0.256	6.50	8.960	39.82	0.694	17.63	0.042	1.07	16.3	316 SS CG P
0.240	6.10	62019S	1.250	31.75	0.156	3.96	31.700	5.55	0.283	7.18	8.971	39.87	0.756	19.20	0.042	1.07	17.8	316 SS CG P
0.240	6.10	62020S	1.380	34.93	0.156	3.96	28.300	4.96	0.317	8.04	8.971	39.87	0.841	21.36	0.042	1.07	19.7	316 SS CG P
0.240	6.10	62021S	1.500	38.10	0.156	3.96	25.800	4.52	0.347	8.82	8.953	39.79	0.905	22.99	0.042	1.07	21.4	316 SS CG P
0.240	6.10	62022S	1.750	44.45	0.156	3.96	22.100	3.87	0.406	10.29	8.973	39.88	1.050	26.67	0.042	1.07	24.7	316 SS CG P
0.240	6.10	62023S	2.000	50.80	0.156	3.96	19.200	3.36	0.467	11.85	8.966	39.85	1.196	30.38	0.042	1.07	28.1	316 SS CG P
0.240	6.10	62024S	2.250	57.15	0.156	3.96	17.100	3.00	0.524	13.30	8.960	39.82	1.340	34.04	0.042	1.07	31.3	316 SS CG P
0.240	6.10	62025S	2.500	63.50	0.156	3.96	14.800	2.59	0.606	15.37	8.969	39.86	1.513	38.43	0.042	1.07	35.9	316 SS CG P
0.240	6.10	62089S	0.380	9.53	0.150	3.82	179.300	31.40	0.060	1.52	10.758	47.81	0.271	6.88	0.045	1.14	5.9	316 SS CG P
0.240	6.10	62090S	0.440	11.13	0.150	3.82	146.800	25.71	0.073	1.86	10.716	47.63	0.311	7.90	0.045	1.14	6.7	316 SS CG P
0.240	6.10	62091S	0.500	12.70	0.150	3.82	124.600	21.82	0.086	2.19	10.716	47.63	0.350	8.89	0.045	1.14	7.6	316 SS CG P
0.240	6.10	62092S	0.560	14.30	0.150	3.82	108.200	18.95	0.099	2.52	10.712	47.61	0.389	9.88	0.045	1.14	8.4	316 SS CG P
0.240	6.10	62093S	0.630	15.88	0.150	3.82	95.500	16.73	0.112	2.85	10.696	47.54	0.428	10.87	0.045	1.14	9.2	316 SS CG P
0.240	6.10	62094S	0.690	17.48	0.150	3.82	85.600	14.99	0.125	3.18	10.700	47.56	0.467	11.86	0.045	1.14	10.1	316 SS CG P
0.240	6.10	62095S	0.750	19.05	0.150	3.82	77.400	13.56	0.139	3.52	10.759	47.82	0.506	12.85	0.045	1.14	10.9	316 SS CG P
0.240	6.10	62096S	0.810	20.65	0.150	3.82	70.800	12.40	0.152	3.85	10.762	47.83	0.545	13.84	0.045	1.14	11.8	316 SS CG P
0.240	6.10	62097S	0.880	22.23	0.150	3.82	65.100	11.40	0.165	4.18	10.742	47.74	0.585	14.86	0.045	1.14	12.6	316 SS CG P
0.240	6.10	62098S	0.940	23.83	0.150	3.82	60.300	10.56	0.178	4.52	10.733	47.70	0.624	15.85	0.045	1.14	13.5	316 SS CG P
0.240	6.10	62099S	1.000	25.40	0.150	3.82	56.200	9.84	0.191	4.85	10.734	47.71	0.663	16.84	0.045	1.14	14.3	316 SS CG P
0.240	6.10	62100S	1.130	28.58	0.150	3.82	49.400	8.65	0.217	5.51	10.720	47.64	0.742	18.85	0.045	1.14	16	316 SS CG P
0.240	6.10	62101S	1.250	31.75	0.150	3.82	44.000	7.71	0.244	6.19	10.736	47.72	0.820	20.83	0.045	1.14	17.7	316 SS CG P
0.240	6.10	62102S	1.500	38.10	0.150	3.82	36.200	6.34	0.296	7.52	10.715	47.62	0.977	24.82	0.045	1.14	21.1	316 SS CG P
0.240	6.10	62103S	1.750	44.45	0.150	3.82	30.800	5.39	0.348	8.84	10.718	47.64	1.133	28.78	0.045	1.14	24.4	316 SS CG P
0.240																		




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends C P	Finish C P								
0.250	6.35	66975S	0.250	6.35	0.220	5.59	1.950	0.34	0.167	4.24	0.326	1.45	0.083	2.11	0.015	0.38	4.5	316 SS	C	P
0.250	6.35	66976S	0.250	6.35	0.186	4.72	63.257	11.07	0.063	1.60	3.985	17.73	0.160	4.06	0.032	0.81	4	316 SS	C	P
0.250	6.35	66977S	0.250	6.35	0.222	5.64	0.415	0.07	0.085	2.16	0.035	0.16	0.165	4.19	0.014	0.36	10.8	316 SS	C	P
0.250	6.35	66978S	0.250	6.35	0.200	5.08	14.289	2.50	0.100	2.54	1.429	6.36	0.150	3.81	0.025	0.64	5	316 SS	C	P
0.250	6.35	66979S	0.280	7.11	0.210	5.33	5.479	0.96	0.160	4.06	0.877	3.90	0.120	3.05	0.020	0.51	5	316 SS	C	P
0.250	6.35	66980S	0.280	7.11	0.214	5.44	3.503	0.61	0.172	4.37	0.603	2.68	0.108	2.74	0.018	0.46	5	316 SS	C	P
0.250	6.35	66981S	0.310	7.87	0.190	4.83	23.772	4.16	0.130	3.30	3.090	13.74	0.180	4.57	0.030	0.76	6	316 SS	CG	P
0.250	6.35	66982S	0.380	9.65	0.180	4.57	47.185	8.26	0.109	2.77	5.143	22.88	0.210	5.33	0.035	0.89	6	316 SS	CG	P
0.250	6.35	66983S	0.380	9.65	0.202	5.13	8.982	1.57	0.190	4.83	1.707	7.59	0.168	4.27	0.024	0.61	6	316 SS	C	P
0.250	6.35	66984S	0.380	9.65	0.198	5.03	16.941	2.97	0.128	3.25	2.168	9.64	0.156	3.96	0.026	0.66	5	316 SS	C	P
0.250	6.35	66985S	0.380	9.65	0.208	5.28	5.061	0.89	0.228	5.79	1.154	5.13	0.147	3.73	0.021	0.53	6	316 SS	C	P
0.250	6.35	66986S	0.380	9.65	0.202	5.13	11.976	2.10	0.143	3.63	1.713	7.62	0.144	3.66	0.024	0.61	5	316 SS	C	P
0.250	6.35	66987S	0.410	10.41	0.226	5.74	0.320	0.06	0.302	7.67	0.097	0.43	0.108	2.74	0.012	0.31	8	316 SS	C	P
0.250	6.35	66988S	0.410	10.41	0.192	4.88	18.202	3.19	0.164	4.17	2.985	13.28	0.218	5.54	0.029	0.74	6.5	316 SS	C	P
0.250	6.35	66989S	0.410	10.41	0.200	5.08	10.717	1.88	0.180	4.57	1.929	8.58	0.150	3.81	0.025	0.64	6	316 SS	CG	P
0.250	6.35	66990S	0.410	10.41	0.198	5.03	10.165	1.78	0.202	5.13	2.053	9.13	0.208	5.28	0.026	0.66	7	316 SS	C	P
0.250	6.35	66991S	0.410	10.41	0.198	5.03	16.941	2.97	0.128	3.25	2.168	9.64	0.156	3.96	0.026	0.66	5	316 SS	C	P
0.250	6.35	66992S	0.440	11.18	0.206	5.23	7.059	1.24	0.188	4.78	1.327	5.90	0.143	3.63	0.022	0.56	5.5	316 SS	C	P
0.250	6.35	66993S	0.440	11.18	0.206	5.23	6.176	1.08	0.214	5.44	1.322	5.88	0.154	3.91	0.022	0.56	6	316 SS	C	P
0.250	6.35	66994S	0.440	11.18	0.202	5.13	10.265	1.80	0.167	4.24	1.714	7.62	0.132	3.35	0.024	0.61	5.5	316 SS	CG	P
0.250	6.35	66995S	0.440	11.18	0.194	4.93	17.556	3.07	0.153	3.89	2.686	11.95	0.168	4.27	0.028	0.71	6	316 SS	CG	P
0.250	6.35	66996S	0.440	11.18	0.200	5.08	12.248	2.14	0.158	4.01	1.935	8.61	0.163	4.14	0.025	0.64	5.5	316 SS	C	P
0.250	6.35	66997S	0.440	11.18	0.222	5.64	0.913	0.16	0.342	8.69	0.312	1.39	0.098	2.49	0.014	0.36	6	316 SS	C	P
0.250	6.35	66998S	0.470	11.94	0.210	5.33	3.288	0.58	0.304	7.72	1.000	4.45	0.160	4.06	0.020	0.51	7	316 SS	C	P
0.250	6.35	66999S	0.470	11.94	0.228	5.79	0.223	0.04	0.371	9.42	0.083	0.37	0.099	2.52	0.011	0.28	8	316 SS	C	P
0.250	6.35	67000S	0.500	12.70	0.198	5.03	10.165	1.78	0.213	5.41	2.165	9.63	0.208	5.28	0.026	0.66	7	316 SS	C	P
0.250	6.35	67001S	0.500	12.70	0.200	5.08	14.289	2.50	0.135	3.43	1.929	8.58	0.150	3.81	0.025	0.64	5	316 SS	C	P
0.250	6.35	67002S	0.500	12.70	0.200	5.08	8.573	1.50	0.225	5.72	1.929	8.58	0.200	5.08	0.025	0.64	7	316 SS	C	P
0.250	6.35	67003S	0.500	12.70	0.192	4.88	16.382	2.87	0.182	4.62	2.982	13.26	0.203	5.16	0.029	0.74	7	316 SS	CG	P
0.250	6.35	67004S	0.500	12.70	0.200	5.08	10.717	1.88	0.180	4.57	1.929	8.58	0.175	4.45	0.025	0.64	6	316 SS	C	P
0.250	6.35	67005S	0.500	12.70	0.202	5.13	8.982	1.57	0.190	4.83	1.707	7.59	0.168	4.27	0.024	0.61	6	316 SS	C	P
0.250	6.35	67006S	0.500	12.70	0.190	4.83	19.018	3.33	0.173	4.39	3.290	14.63	0.240	6.10	0.030	0.76	7	316 SS	C	P
0.250	6.35	67007S	0.500	12.70	0.210	5.33	2.740	0.48	0.320	8.13	0.877	3.90	0.180	4.57	0.020	0.51	8	316 SS	C	P
0.250	6.35	67008S	0.500	12.70	0.194	4.93	11.704	2.05	0.230	5.84	2.692	11.97	0.252	6.40	0.028	0.71	8	316 SS	C	P
0.250	6.35	67009S	0.520	13.21	0.210	5.33	4.109	0.72	0.243	6.17	0.998	4.44	0.140	3.56	0.020	0.51	6	316 SS	C	P
0.250	6.35	67010S	0.530	13.46	0.174	4.42	68.388	11.97	0.096	2.44	6.565	29.20	0.228	5.79	0.038	0.97	6	316 SS	CG	P
0.250	6.35	67011S	0.530	13.46	0.192	4.88	11.701	2.05	0.255	6.48	2.984	13.27	0.261	6.63	0.029	0.74	9	316 SS	CG	P
0.250	6.35	67012S	0.560	14.22	0.186	4.72	23.003	4.03	0.173	4.39	3.980	17.70	0.272	6.91	0.032	0.81	7.5	316 SS	C	P
0.250	6.35	67013S	0.560	14.22	0.194	4.93	10.032	1.76	0.268	6.81	2.689	11.96	0.280	7.11	0.028	0.71	9	316 SS	C	P
0.250	6.35	67014S	0.590	14.99	0.200	5.08	5.358	0.94	0.315	8.00	1.688	7.51	0.275	6.99	0.025	0.64	10	316 SS	C	P
0.250	6.35	67015S	0.590	14.99	0.206	5.23	4.941	0.87	0.268	6.81	1.324	5.89	0.154	3.91	0.022	0.56	7	316 SS	CG	P
0.250	6.35	67016S	0.590	14.99	0.198	5.03	11.294	1.98	0.192	4.88	2.168	9.64	0.195	4.95	0.026	0.66	6.5	316 SS	C	P
0.250	6.35	67017S	0.630	16.00	0.194	4.93	10.032	1.76	0.268	6.81	2.689	11.96	0.252	6.40	0.028	0.71	9	316 SS	CG	P
0.250	6.35	67018S	0.630	16.00	0.192	4.88	18.202	3.19	0.164	4.17	2.985	13.28	0.218	5.54	0.029	0.74	6.5	316 SS	C	P
0.250	6.35	67019S	0.630	16.00	0.206	5.23	4.941	0.87	0.268	6.81	1.324	5.89	0.154	3.91	0.022	0.56	7	316 SS	CG	P
0.250	6.35	67020S	0.630	16.00	0.210	5.33	2.740	0.48	0.365	9.27	1.000	4.45	0.160	4.06	0.020	0.51	8	316 SS	CG	P
0.250	6.35	67021S	0.630	16.00	0.190	4.83	15.848	2.77	0.208	5.28	3.296	14.66	0.270	6.86	0.030	0.76	8	316 SS	C	P
0.250	6.35	67022S	0.630	16.00	0.214	5.44	3.002	0.53	0.244	6.20	0.732	3.26	0.117	2.97	0.018	0.46	5.5	316 SS	C	P
0.250	6.35	67023S	0.660	16.76	0.198	5.03	5.775	1.01	0.353	8.97	2.039	9.07	0.307	7.80	0.026	0.66	10.8	316 SS	C	P
0.250	6.35	67024S	0.660	16.76	0.188	4.78	18.318	3.21	0.198	5.03	3.627	16.13	0.279	7.09	0.031	0.79	8	316 SS	C	P
0.250	6.35	67025S	0.660	16.76	0.198	5.03	8.132	1.42	0.266	6.76	2.163	9.62	0.215	5.46	0.026	0.66	8.3	316 SS	CG	P
0.250	6.35	67026S	0.660	16.76	0.202	5.13	6.532	1.14	0.262	6.66	1.711	7.61	0.180	4.57	0.024	0.61	7.5	316 SS	CG	P
0.250	6.35	67027S	0.690	17.53	0.166	4.22	57.631	10.09	0.149	3.79	8.587	38.20	0.399	10.14	0.042	1.07	9.5	316 SS	CG	P
0.250	6.35	67028S	0.690	17.53	0.200	5.08	7.144	1.25	0.270	6.86	1.929	8.58	0.225	5.72	0.025	0.64	8	316 SS	C	P
0.250	6.35	67029S	0.690	17.53	0.190	4.83	11.187	1.96	0.294											



316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm		Wire Dia. Inches mm		Total Coils	E M at'l	F n d s	H s h	
0.250	6.35	67050S	0.810	20.57	0.194	4.93	8.778	1.54	0.307	7.80	2.695	11.99	0.308	7.82	0.028	0.71	10	316 SS C P
0.250	6.35	67051S	0.840	21.34	0.198	5.03	6.353	1.11	0.341	8.66	2.166	9.63	0.260	6.60	0.026	0.66	10	316 SS CG P
0.250	6.35	67052S	0.880	22.35	0.198	5.03	5.775	1.01	0.375	9.53	2.166	9.63	0.281	7.14	0.026	0.66	10.8	316 SS CGP
0.250	6.35	67053S	0.880	22.35	0.198	5.03	6.353	1.11	0.341	8.66	2.166	9.63	0.286	7.26	0.026	0.66	10	316 SS C P
0.250	6.35	67054S	0.880	22.35	0.194	4.93	10.032	1.76	0.268	6.81	2.689	11.96	0.280	7.11	0.028	0.71	9	316 SS C P
0.250	6.35	67055S	0.880	22.35	0.190	4.83	10.009	1.75	0.329	8.36	3.293	14.65	0.345	8.76	0.030	0.76	11.5	316 SS CG P
0.250	6.35	67056S	0.940	23.88	0.210	5.33	1.455	0.26	0.654	16.61	0.952	4.23	0.286	7.26	0.020	0.51	13.3	316 SS C P
0.250	6.35	67057S	0.940	23.88	0.160	4.06	61.977	10.85	0.169	4.29	10.474	46.59	0.522	13.26	0.045	1.14	11.6	316 SS CG P
0.250	6.35	67059S	0.940	23.88	0.194	4.93	6.384	1.12	0.422	10.72	2.694	11.98	0.392	9.96	0.028	0.71	13	316 SS C P
0.250	6.35	67060S	0.940	23.88	0.190	4.83	8.644	1.51	0.381	9.68	3.293	14.65	0.420	10.67	0.030	0.76	13	316 SS C P
0.250	6.35	67061S	0.940	23.88	0.198	5.03	5.647	0.99	0.384	9.75	2.168	9.64	0.312	7.93	0.026	0.66	11	316 SS C P
0.250	6.35	67062S	0.940	23.88	0.190	4.83	9.509	1.66	0.346	8.79	3.290	14.63	0.390	9.91	0.030	0.76	12	316 SS C P
0.250	6.35	67063S	0.940	23.88	0.202	5.13	3.863	0.68	0.443	11.25	1.711	7.61	0.295	7.49	0.024	0.61	11.3	316 SS C P
0.250	6.35	67064S	1.000	25.40	0.194	4.93	7.803	1.37	0.345	8.76	2.692	11.97	0.336	8.53	0.028	0.71	11	316 SS C P
0.250	6.35	67065S	1.000	25.40	0.206	5.23	3.294	0.58	0.402	10.21	1.324	5.89	0.209	5.31	0.022	0.56	9.5	316 SS CG P
0.250	6.35	67066S	1.000	25.40	0.194	4.93	6.384	1.12	0.422	10.72	2.694	11.98	0.392	9.96	0.028	0.71	13	316 SS C P
0.250	6.35	67067S	1.000	25.40	0.210	5.33	2.435	0.43	0.410	10.41	0.998	4.44	0.195	4.95	0.020	0.51	8.8	316 SS C P
0.250	6.35	67068S	1.000	25.40	0.180	4.57	18.324	3.21	0.282	7.16	5.167	22.98	0.466	11.84	0.035	0.89	12.3	316 SS C P
0.250	6.35	67069S	1.000	25.40	0.172	4.37	21.988	3.85	0.322	8.18	7.080	31.49	0.663	16.84	0.039	0.99	16	316 SS C P
0.250	6.35	67070S	1.000	25.40	0.214	5.44	1.106	0.19	0.661	16.79	0.731	3.25	0.225	5.72	0.018	0.46	11.5	316 SS C P
0.250	6.35	67071S	1.000	25.40	0.188	4.78	15.701	2.75	0.231	5.87	3.627	16.13	0.310	7.87	0.031	0.79	9	316 SS C P
0.250	6.35	67072S	1.000	25.40	0.202	5.13	3.266	0.57	0.524	13.31	1.711	7.61	0.336	8.53	0.024	0.61	13	316 SS C P
0.250	6.35	67073S	1.000	25.40	0.210	5.33	2.055	0.36	0.486	12.34	0.999	4.44	0.220	5.59	0.020	0.51	10	316 SS C P
0.250	6.35	67074S	1.000	25.40	0.208	5.28	1.619	0.28	0.674	17.12	1.091	4.85	0.326	8.28	0.021	0.53	14.5	316 SS C P
0.250	6.35	67075S	1.000	25.40	0.190	4.83	11.456	2.01	0.288	7.32	3.299	14.67	0.339	8.61	0.030	0.76	10.3	316 SS C P
0.250	6.35	67076S	1.000	25.40	0.190	4.83	12.678	2.22	0.260	6.60	3.296	14.66	0.285	7.24	0.030	0.76	9.5	316 SS CG P
0.250	6.35	67077S	1.000	25.40	0.202	5.13	4.227	0.74	0.405	10.29	1.712	7.62	0.252	6.40	0.024	0.61	10.5	316 SS CGP
0.250	6.35	67078S	1.000	25.40	0.186	4.72	19.464	3.41	0.204	5.18	3.971	17.66	0.304	7.72	0.032	0.81	8.5	316 SS C P
0.250	6.35	67079S	1.060	26.92	0.202	5.13	3.266	0.57	0.524	13.31	1.711	7.61	0.336	8.53	0.024	0.61	13	316 SS C P
0.250	6.35	67080S	1.090	27.69	0.224	5.69	0.168	0.03	0.843	21.41	0.142	0.63	0.247	6.27	0.013	0.33	18	316 SS C P
0.250	6.35	67081S	1.130	28.70	0.200	5.08	3.897	0.68	0.495	12.57	1.929	8.58	0.350	8.89	0.025	0.64	13	316 SS C P
0.250	6.35	67082S	1.130	28.70	0.216	5.49	0.869	0.15	0.710	18.03	0.617	2.74	0.213	5.41	0.017	0.43	11.5	316 SS C P
0.250	6.35	67083S	1.130	28.70	0.216	5.49	0.393	0.07	0.722	18.34	0.284	1.26	0.408	10.36	0.017	0.43	23	316 SS C P
0.250	6.35	67084S	1.130	28.70	0.198	5.03	5.979	1.05	0.362	9.20	2.164	9.63	0.299	7.60	0.026	0.66	10.5	316 SS C P
0.250	6.35	67085S	1.130	28.70	0.216	5.49	0.434	0.08	0.756	19.20	0.328	1.46	0.374	9.50	0.017	0.43	21	316 SS C P
0.250	6.35	67086S	1.130	28.70	0.210	5.33	1.264	0.22	0.790	20.07	0.999	4.44	0.320	8.13	0.020	0.51	15	316 SS C P
0.250	6.35	67087S	1.160	29.46	0.190	4.83	8.644	1.51	0.381	9.68	3.293	14.65	0.390	9.91	0.030	0.76	13	316 SS CG P
0.250	6.35	67088S	1.190	30.23	0.214	5.44	0.618	0.11	0.830	21.08	0.513	2.28	0.360	9.14	0.018	0.46	19	316 SS C P
0.250	6.35	67089S	1.250	31.75	0.210	5.33	1.370	0.24	0.729	18.52	0.999	4.44	0.300	7.62	0.020	0.51	14	316 SS C P
0.250	6.35	67090S	1.250	31.75	0.190	4.83	4.134	0.72	0.500	12.70	2.067	9.19	0.750	19.05	0.030	0.76	25	316 SS CGP
0.250	6.35	67091S	1.250	31.75	0.226	5.74	0.154	0.03	1.064	27.03	0.164	0.73	0.186	4.72	0.012	0.31	14.5	316 SS C P
0.250	6.35	67092S	1.250	31.75	0.198	5.03	4.235	0.74	0.511	12.98	2.164	9.63	0.390	9.91	0.026	0.66	14	316 SS C P
0.250	6.35	67093S	1.250	31.75	0.202	5.13	2.764	0.48	0.619	15.72	1.711	7.61	0.384	9.75	0.024	0.61	15	316 SS C P
0.250	6.35	67094S	1.280	32.51	0.190	4.83	8.644	1.51	0.381	9.68	3.293	14.65	0.390	9.91	0.030	0.76	13	316 SS CG P
0.250	6.35	67095S	1.380	35.05	0.210	5.33	1.730	0.30	0.577	14.66	0.998	4.44	0.250	6.35	0.020	0.51	11.5	316 SS C P
0.250	6.35	67096S	1.380	35.05	0.180	4.57	13.017	2.28	0.397	10.08	5.168	22.99	0.613	15.57	0.035	0.89	16.5	316 SS C P
0.250	6.35	67097S	1.380	35.05	0.194	4.93	5.202	0.91	0.517	13.13	2.689	11.96	0.462	11.74	0.028	0.71	15.5	316 SS C P
0.250	6.35	67098S	1.380	35.05	0.190	4.83	4.322	0.76	0.660	16.76	2.853	12.69	0.720	18.29	0.030	0.76	24	316 SS CG P
0.250	6.35	67099S	1.410	35.81	0.210	5.33	0.889	0.16	1.000	25.40	0.889	3.95	0.410	10.41	0.020	0.51	20.5	316 SS CG P
0.250	6.35	67100S	1.410	35.81	0.210	5.33	1.150	0.20	0.869	22.07	0.999	4.44	0.346	8.79	0.020	0.51	16.3	316 SS C P
0.250	6.35	67101S	1.500	38.10	0.198	5.03	2.310	0.40	0.850	21.59	1.964	8.74	0.650	16.51	0.026	0.66	24	316 SS C P
0.250	6.35	67102S	1.580	40.13	0.210	5.33	0.865	0.15	1.140	28.96	0.986	4.39	0.440	11.18	0.020	0.51	21	316 SS C P
0.250	6.35	67103S	1.630	41.40	0.190	4.83	4.322	0.76	0.762	19.36	3.293	14.65	0.750	19.05	0.030	0.76	24	316 SS C P
0.250	6.35	67104S	1.630	41.40	0.224	5.69	0.163	0.03	1.376	34.95	0.224	1.00	0.254	6.45	0.013	0.33	18.5	316 SS C P
0.250	6.35	67105S	1.690	42.93	0.188	4.78	4.996	0.87	0.727	18.47	3.632	16.16	0.744	18.90	0.031	0.79	24	316 SS CG P
0.250	6.35	67106S	1.750	44.45	0.200	5.08	2.041	0.36	0.946	24.03	1.931	8.59						




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg Max. Defl. Inches	Sugg Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish
mm		mm	mm	N/mm	mm	N	mm	mm				
0.250	6.35	68114S	0.190	4.83	0.164	4.17	321.204	56.21	0.029	0.74	9.315	41.43
0.250	6.35	68115S	0.250	6.35	0.178	4.52	107.115	18.75	0.052	1.32	5.570	24.78
0.250	6.35	68116S	0.310	7.87	0.186	4.72	42.172	7.38	0.094	2.39	3.964	17.63
0.250	6.35	68117S	0.310	7.87	0.186	4.72	50.606	8.86	0.079	2.01	3.998	17.78
0.250	6.35	68118S	0.340	8.64	0.164	4.17	160.602	28.11	0.057	1.45	9.154	40.72
0.250	6.35	68119S	0.340	8.64	0.170	4.32	230.357	40.31	0.033	0.84	7.602	33.81
0.250	6.35	68120S	0.380	9.65	0.180	4.57	37.748	6.61	0.100	2.54	3.775	16.79
0.250	6.35	68121S	0.440	11.18	0.182	4.62	47.358	8.29	0.100	2.54	4.736	21.07
0.250	6.35	68123S	0.470	11.94	0.182	4.62	41.439	7.25	0.115	2.92	4.765	21.20
0.250	6.35	68124S	0.470	11.94	0.172	4.37	61.567	10.77	0.115	2.92	7.080	31.49
0.250	6.35	68125S	0.470	11.94	0.168	4.27	77.381	13.54	0.106	2.69	8.202	36.48
0.250	6.35	68126S	0.500	12.70	0.178	4.52	42.846	7.50	0.131	3.33	5.613	24.97
0.250	6.35	68127S	0.500	12.70	0.172	4.37	55.970	9.80	0.126	3.20	7.052	31.37
0.250	6.35	68128S	0.500	12.70	0.160	4.06	125.258	21.92	0.084	2.13	10.522	46.80
0.250	6.35	68129S	0.500	12.70	0.160	4.06	99.162	17.35	0.105	2.67	10.412	46.31
0.250	6.35	68130S	0.500	12.70	0.180	4.57	47.185	8.26	0.109	2.77	5.143	22.88
0.250	6.35	68131S	0.500	12.70	0.172	4.37	68.408	11.97	0.103	2.62	7.046	31.34
0.250	6.35	68132S	0.530	13.46	0.180	4.57	47.185	8.26	0.109	2.77	5.143	22.88
0.250	6.35	68133S	0.530	13.46	0.172	4.37	51.306	8.98	0.138	3.51	7.080	31.49
0.250	6.35	68134S	0.530	13.46	0.170	4.32	69.107	12.09	0.110	2.79	7.602	33.81
0.250	6.35	68136S	0.550	13.97	0.170	4.32	69.107	12.09	0.110	2.79	7.602	33.81
0.250	6.35	68137S	0.590	14.99	0.170	4.32	65.816	11.52	0.116	2.95	7.635	33.96
0.250	6.35	68138S	0.590	14.99	0.180	4.57	23.593	4.13	0.219	5.56	5.167	22.98
0.250	6.35	68139S	0.590	14.99	0.180	4.57	26.963	4.72	0.191	4.85	5.150	22.91
0.250	6.35	68140S	0.630	16.00	0.160	4.06	99.162	17.35	0.106	2.69	10.511	46.75
0.250	6.35	68141S	0.630	16.00	0.164	4.17	70.030	12.26	0.131	3.33	9.174	40.81
0.250	6.35	68142S	0.630	16.00	0.182	4.62	26.521	4.64	0.179	4.55	4.747	21.12
0.250	6.35	68143S	0.630	16.00	0.174	4.42	54.710	9.57	0.120	3.05	6.565	29.20
0.250	6.35	68144S	0.660	16.76	0.174	4.42	39.079	6.84	0.168	4.27	6.565	29.20
0.250	6.35	68145S	0.690	17.53	0.164	4.17	64.241	11.24	0.143	3.63	9.186	40.86
0.250	6.35	68146S	0.690	17.53	0.178	4.52	42.846	7.50	0.131	3.33	5.613	24.97
0.250	6.35	68147S	0.720	18.29	0.172	4.37	43.977	7.70	0.161	4.09	7.080	31.49
0.250	6.35	68149S	0.750	19.05	0.182	4.62	22.101	3.87	0.215	5.46	4.752	21.14
0.250	6.35	68150S	0.750	19.05	0.160	4.06	79.330	13.88	0.132	3.35	10.472	46.58
0.250	6.35	68152S	0.750	19.05	0.168	4.27	64.484	11.29	0.127	3.23	8.189	36.43
0.250	6.35	68153S	0.750	19.05	0.180	4.57	25.165	4.40	0.205	5.21	5.159	22.95
0.250	6.35	68155S	0.780	19.81	0.168	4.27	42.990	7.52	0.190	4.83	8.168	36.33
0.250	6.35	68156S	0.810	20.57	0.172	4.37	30.784	5.39	0.230	5.84	7.080	31.49
0.250	6.35	68157S	0.810	20.57	0.172	4.37	34.204	5.99	0.207	5.26	7.080	31.49
0.250	6.35	68158S	0.810	20.57	0.155	3.94	85.147	14.90	0.140	3.56	11.921	53.03
0.250	6.35	68159S	0.810	20.57	0.182	4.62	22.101	3.87	0.215	5.46	4.752	21.14
0.250	6.35	68160S	0.810	20.57	0.182	4.62	19.500	3.41	0.244	6.20	4.758	21.16
0.250	6.35	68161S	0.840	21.34	0.182	4.62	23.679	4.14	0.201	5.11	4.759	21.17
0.250	6.35	68162S	0.880	22.35	0.180	4.57	21.448	3.75	0.241	6.12	5.169	22.99
0.250	6.35	68164S	0.880	22.35	0.180	4.57	19.867	3.48	0.260	6.60	5.165	22.97
0.250	6.35	68165S	0.910	23.11	0.174	4.42	28.795	5.04	0.228	5.79	6.565	29.20
0.250	6.35	68166S	0.910	23.11	0.160	4.06	66.108	11.57	0.158	4.01	10.445	46.46
0.250	6.35	68167S	0.940	23.88	0.186	4.72	12.651	2.21	0.315	8.00	3.985	17.73
0.250	6.35	68168S	1.000	25.40	0.180	4.57	17.158	3.00	0.301	7.65	5.165	22.97
0.250	6.35	68169S	1.000	25.40	0.164	4.17	41.180	7.21	0.222	5.64	9.142	40.66
0.250	6.35	68170S	1.000	25.40	0.186	4.72	9.732	1.70	0.409	10.39	3.980	17.70
0.250	6.35	68171S	1.000	25.40	0.182	4.62	12.278	2.15	0.388	9.86	4.764	21.19
0.250	6.35	68172S	1.000	25.40	0.170	4.32	38.393	6.72	0.199	5.06	7.640	33.98
0.250	6.35	68173S	1.060	26.92	0.178	4.52	13.389	2.34	0.412	10.47	5.516	24.54
0.250	6.35	68174S	1.060	26.92	0.182	4.62	15.348	2.69	0.310	7.87	4.758	21.16
0.250	6.35	68175S	1.060	26.92	0.155	3.94	80.665	14.12	0.148	3.76	11.938	53.10
0.250	6.35	68176S	1.060	26.92	0.186	4.72	11.501	2.01	0.346	8.79	3.979	17.70
0.250	6.35	68177S	1.090	27.69	0.174	4.42	22.796	3.99	0.288	7.32	6.565	29.20
0.250	6.35	68178S	1.130	28.70	0.174	4.42	20.568	3.60	0.319	8.10	6.561	29.18
0.250	6.35	68180S	1.250	31.75	0.170	4.32	23.830	4.17	0.320	8.13	7.626	33.92
0.250	6.35	68181S	1.250	31.75	0.160	4.06	37.186	6.51	0.281	7.14	10.449	46.48
0.250	6.35	68182S	1.310	33.27	0.182	4.62	12.278	2.15	0.388	9.86	4.764	21.19
0.250	6.35	68183S	1.310	33.27	0.166	4.22	30.874	5.40	0.278	7.06	8.583	38.18
0.250	6.35	68184S	1.380	35.05	0.170	4.32	23.830	4.17	0.320	8.13	7.626	33.92
0.250	6.35	68185S	1.440	36.58	0.155	3.94	42.573	7.45	0.280	7.11	11.920	53.02
0.250	6.35	68186S	1.440	36.58	0.155	3.94	46.444	8.13	0.256	6.50	11.890	52.89
0.250	6.35	68187S	1.500	38.10	0.178	4.52	10.450	1.83	0.536	13.61	5.601	24.91
0.250	6.35	68188S	1.500	38.10	0.170	4.32	19.196	3.36	0.397	10.08	7.621	33.90
0.250	6.35	68189S	1.500	38.10	0.170	4.32	19.196	3.36	0.397	10.08	7.621	33.90
0.250	6.35	68190S	1.590	40.39	0.168	4.27	15.476	2.71	0.483	12.27	7.475	33.25
0.250	6.35	68191S	1.690	42.93	0.170	4.32	19.196	3.36	0.397	10.08	7.621	33.90
0.250	6.35	68192S	1.750	44.45	0.182	4.62	7.534	1.32	0.632	16.05	4.761	21.18
0.250	6.35	68193S	1.780	45.21	0.170	4.32	16.222	2.84	0.470	11.94	7.624	33.91
0.250	6.35	68194S	1.780	45.21	0.182	4.62	8.960	1.57	0.531	13.49	4.758	21.16
0.250	6.35	68195S	1.810	45.97	0.174	4.42	14.948	2.62	0.439	11.15	6.562	29.19

MATERIAL 316 SS 316 Stainless Steel


ENDS C Closed
CG Closed & Ground

FINISH P Passivated




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length		Wire Dia. Inches mm		Total Coils	E N D S Mat'l	F in s h		
0.250	6.35	68197S	2.000	50.80	0.178	4.52	9.396	1.64	0.596	15.14	5.600	24.91	0.893	22.68	0.036	0.91	24.8	316 SS CG P
0.250	6.35	68198S	2.020	51.31	0.170	4.32	14.397	2.52	0.530	13.46	7.630	33.94	1.040	26.42	0.040	1.02	26	316 SS CG P
0.250	6.35	68199S	2.220	56.39	0.180	4.57	13.482	2.36	0.383	9.73	5.164	22.97	0.595	15.11	0.035	0.89	16	316 SS CG P
0.250	6.35	68196S	1.940	49.28	0.142	3.61	72.391	12.67	0.235	5.97	17.012	75.67	1.161	29.49	0.054	1.37	21.5	316 SS CG P
0.250	6.35	61181S	0.250	6.35	0.210	5.33	10.150	1.78	0.100	2.53	1.015	4.51	0.075	1.89	0.020	0.51	3.6	316 SS CG P
0.250	6.35	61182S	0.310	7.95	0.210	5.33	7.800	1.37	0.130	3.29	1.015	4.51	0.085	2.15	0.020	0.51	4.1	316 SS CG P
0.250	6.35	61183S	0.380	9.53	0.210	5.33	6.360	1.11	0.159	4.03	1.011	4.49	0.094	2.40	0.020	0.51	4.6	316 SS CG P
0.250	6.35	61184S	0.440	11.13	0.210	5.33	5.350	0.94	0.189	4.80	1.012	4.50	0.104	2.65	0.020	0.51	5.1	316 SS CG P
0.250	6.35	61185S	0.500	12.70	0.210	5.33	4.630	0.81	0.218	5.54	1.010	4.49	0.114	2.90	0.020	0.51	5.6	316 SS CG P
0.250	6.35	61186S	0.560	14.30	0.210	5.33	4.070	0.71	0.248	6.30	1.010	4.49	0.124	3.15	0.020	0.51	6	316 SS CG P
0.250	6.35	61187S	0.630	15.88	0.210	5.33	3.640	0.64	0.278	7.04	1.012	4.50	0.134	3.41	0.020	0.51	6.5	316 SS CG P
0.250	6.35	61188S	0.690	17.48	0.210	5.33	3.290	0.58	0.307	7.80	1.009	4.48	0.144	3.66	0.020	0.51	7	316 SS CG P
0.250	6.35	61189S	0.750	19.05	0.210	5.33	3.000	0.53	0.337	8.54	1.011	4.49	0.154	3.91	0.020	0.51	7.5	316 SS CG P
0.250	6.35	61190S	0.810	20.65	0.210	5.33	2.760	0.48	0.367	9.30	1.011	4.49	0.164	4.17	0.020	0.51	8	316 SS CG P
0.250	6.35	61191S	0.880	22.23	0.210	5.33	2.550	0.45	0.396	10.05	1.010	4.49	0.174	4.41	0.020	0.51	8.4	316 SS CG P
0.250	6.35	61192S	1.000	25.40	0.210	5.33	2.220	0.39	0.456	11.55	1.012	4.50	0.194	4.92	0.020	0.51	9.4	316 SS CG P
0.250	6.35	61193S	1.250	31.75	0.210	5.33	1.760	0.31	0.574	14.59	1.011	4.49	0.233	5.93	0.020	0.51	11.3	316 SS CG P
0.250	6.35	61194S	1.380	34.93	0.210	5.33	1.570	0.28	0.642	16.28	1.011	4.49	0.255	6.47	0.020	0.51	12.4	316 SS CG P
0.250	6.35	61195S	1.500	38.10	0.210	5.33	1.450	0.25	0.698	17.69	1.011	4.49	0.275	6.98	0.020	0.51	13.3	316 SS CG P
0.250	6.35	61196S	1.750	44.45	0.210	5.33	1.240	0.22	0.817	20.71	1.011	4.49	0.315	8.00	0.020	0.51	15.3	316 SS CG P
0.250	6.35	61197S	2.000	50.80	0.210	5.33	1.080	0.19	0.937	23.78	1.011	4.49	0.355	9.01	0.020	0.51	17.2	316 SS CG P
0.250	6.35	61470S	0.380	9.53	0.198	5.03	19.690	3.45	0.110	2.79	2.166	9.63	0.123	3.11	0.026	0.66	4.6	316 SS CG P
0.250	6.35	61471S	0.440	11.13	0.198	5.03	16.470	2.89	0.131	3.33	2.158	9.59	0.136	3.46	0.026	0.66	5.1	316 SS CG P
0.250	6.35	61472S	0.500	12.70	0.198	5.03	14.190	2.49	0.152	3.87	2.157	9.59	0.149	3.79	0.026	0.66	5.6	316 SS CG P
0.250	6.35	61473S	0.560	14.30	0.198	5.03	12.380	2.17	0.175	4.44	2.166	9.63	0.163	4.15	0.026	0.66	6.1	316 SS CG P
0.250	6.35	61474S	0.630	15.88	0.198	5.03	10.980	1.92	0.197	5.00	2.163	9.61	0.177	4.51	0.026	0.66	6.6	316 SS CG P
0.250	6.35	61475S	0.690	17.48	0.198	5.03	9.840	1.72	0.220	5.58	2.164	9.62	0.192	4.87	0.026	0.66	7.2	316 SS CG P
0.250	6.35	61476S	0.750	19.05	0.198	5.03	8.920	1.56	0.243	6.16	2.166	9.63	0.206	5.23	0.026	0.66	7.7	316 SS CG P
0.250	6.35	61477S	0.810	20.65	0.198	5.03	8.130	1.42	0.266	6.75	2.163	9.61	0.221	5.61	0.026	0.66	8.3	316 SS CG P
0.250	6.35	61478S	0.880	22.23	0.198	5.03	7.480	1.31	0.289	7.34	2.161	9.60	0.235	5.98	0.026	0.66	8.8	316 SS CG P
0.250	6.35	61479S	0.940	23.83	0.198	5.03	6.910	1.21	0.313	7.95	2.162	9.61	0.251	6.36	0.026	0.66	9.4	316 SS CG P
0.250	6.35	61480S	1.000	25.40	0.198	5.03	6.160	1.08	0.351	8.91	2.164	9.62	0.269	6.84	0.026	0.66	10.1	316 SS CG P
0.250	6.35	61481S	1.250	31.75	0.198	5.03	5.310	0.93	0.408	10.34	2.166	9.63	0.310	7.87	0.026	0.66	11.6	316 SS CG P
0.250	6.35	61482S	1.500	38.10	0.198	5.03	4.390	0.77	0.493	12.51	2.166	9.63	0.363	9.23	0.026	0.66	13.6	316 SS CG P
0.250	6.35	61483S	1.750	44.45	0.198	5.03	3.750	0.66	0.578	14.66	2.165	9.62	0.417	10.58	0.026	0.66	15.6	316 SS CG P
0.250	6.35	61484S	2.000	50.80	0.198	5.03	3.270	0.57	0.663	16.81	2.165	9.62	0.470	11.94	0.026	0.66	17.6	316 SS CG P
0.250	6.35	61800S	0.310	7.95	0.180	4.57	62.520	10.95	0.083	2.11	5.189	23.06	0.181	4.59	0.035	0.89	5	316 SS CG P
0.250	6.35	61801S	0.380	9.53	0.180	4.57	49.810	8.72	0.104	2.65	5.180	23.02	0.209	5.30	0.035	0.89	5.8	316 SS CG P
0.250	6.35	61802S	0.440	11.13	0.180	4.57	41.280	7.23	0.126	3.19	5.202	23.12	0.237	6.01	0.035	0.89	6.6	316 SS CG P
0.250	6.35	61803S	0.500	12.70	0.180	4.57	35.330	6.19	0.147	3.73	5.194	23.08	0.265	6.72	0.035	0.89	7.3	316 SS CG P
0.250	6.35	61804S	0.560	14.30	0.180	4.57	30.820	5.40	0.168	4.27	5.177	23.01	0.293	7.44	0.035	0.89	8.1	316 SS CG P
0.250	6.35	61805S	0.630	15.88	0.180	4.57	27.370	4.79	0.190	4.81	5.201	23.12	0.321	8.14	0.035	0.89	8.9	316 SS CG P
0.250	6.35	61806S	0.690	17.48	0.180	4.57	24.580	4.31	0.211	5.36	5.187	23.05	0.349	8.86	0.035	0.89	9.7	316 SS CG P
0.250	6.35	61807S	0.750	19.05	0.180	4.57	22.340	3.91	0.232	5.90	5.183	23.04	0.377	9.56	0.035	0.89	10.4	316 SS CG P
0.250	6.35	61808S	0.810	20.65	0.180	4.57	20.450	3.58	0.254	6.44	5.194	23.08	0.405	10.28	0.035	0.89	11.2	316 SS CG P
0.250	6.35	61809S	0.880	22.23	0.180	4.57	18.870	3.31	0.275	6.98	5.190	23.07	0.432	10.98	0.035	0.89	12	316 SS CG P
0.250	6.35	61810S	0.940	23.83	0.180	4.57	17.500	3.07	0.297	7.53	5.198	23.10	0.461	11.70	0.035	0.89	12.8	316 SS CG P
0.250	6.35	61811S	1.000	25.40	0.180	4.57	16.340	2.86	0.318	8.06	5.195	23.09	0.488	12.41	0.035	0.89	13.6	316 SS CG P
0.250	6.35	61812S	1.250	31.75	0.180	4.57	12.870	2.26	0.403	10.23	5.188	23.06	0.600	15.25	0.035	0.89	16.7	316 SS CG P
0.250	6.35	61813S	1.380	34.93	0.180	4.57	11.640	2.04	0.446	11.31	5.192	23.08	0.656	16.67	0.035	0.89	18.2	316 SS CG P
0.250	6.35	61814S	1.500	38.10	0.180	4.57	10.620	1.86	0.489	12.40	5.195	23.09	0.712	18.09	0.035	0.89	19.8	316 SS CG P
0.250	6.35	61815S	1.750	44.45	0.180	4.57	9.040	1.58	0.574	14.56	5.191	23.07	0.824	20.93	0.035	0.89	22.9	316 SS CG P
0.250	6.35	61816S	2.000	50.80	0.180	4.57	7.870	1.38	0.659	16.74	5.187	23.05	0.936	23.78	0.035	0.89	26	316 SS CG P
0.250	6.35	61817S	2.250	57.15	0.180	4.57	6.970	1.22	0.745	18.89	5.192	23.08	1.048	26.62	0.035	0.89	29.1	316 SS CG P
0.250	6.35	61818S	2.500	63.50	0.180	4.57	6.250	1.10	0.830	21.07	5.189	23.06	1.160	29.46	0.035	0.89	32.2	316 SS CG P
0.262	6.66	67125S	0.860	21.84	0.167	4.24	65.793	11.51	0.174	4.42	11.448	50.92</td						




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg Max. Defl. Inches	Sugg Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish								
mm		mm	mm	N/mm	mm	N	mm	mm			C	P								
0.266	6.76	67145S	0.660	16.76	0.208	5.28	11.069	1.94	0.255	6.48	2.823	12.56	0.261	6.63	0.029	0.74	8	316 SS	C	P
0.266	6.76	67146S	0.690	17.53	0.208	5.28	11.069	1.94	0.255	6.48	2.823	12.56	0.232	5.89	0.029	0.74	8	316 SS	CG	P
0.266	6.76	67147S	0.750	19.05	0.238	6.05	0.500	0.09	0.624	15.85	0.312	1.39	0.126	3.20	0.014	0.36	8	316 SS	C	P
0.266	6.76	67148S	0.750	19.05	0.214	5.44	3.756	0.66	0.412	10.47	1.547	6.88	0.338	8.59	0.026	0.66	13	316 SS	CG	P
0.266	6.76	67149S	0.750	19.05	0.236	5.99	0.250	0.04	0.465	11.81	0.116	0.52	0.285	7.24	0.015	0.38	18	316 SS	C	P
0.266	6.76	67150S	0.750	19.05	0.216	5.49	4.360	0.76	0.417	10.59	1.818	8.09	0.250	6.35	0.025	0.64	10	316 SS	CG	P
0.266	6.76	67151S	0.810	20.57	0.222	5.64	2.880	0.50	0.433	11.00	1.247	5.55	0.220	5.59	0.022	0.56	9	316 SS	C	P
0.266	6.76	67152S	0.840	21.34	0.206	5.23	17.118	3.00	0.182	4.62	3.115	13.86	0.225	5.72	0.030	0.76	6.5	316 SS	C	P
0.266	6.76	67153S	0.940	23.88	0.216	5.49	2.492	0.44	0.540	13.72	1.346	5.99	0.400	10.16	0.025	0.64	16	316 SS	CG	P
0.266	6.76	67154S	1.000	25.40	0.198	5.03	12.161	2.13	0.369	9.37	4.487	19.96	0.442	11.23	0.034	0.86	13	316 SS	CG	P
0.266	6.76	67155S	1.000	25.40	0.226	5.74	1.279	0.22	0.730	18.54	0.934	4.15	0.270	6.86	0.020	0.51	12.5	316 SS	C	P
0.266	6.76	67156S	1.000	25.40	0.208	5.28	6.991	1.22	0.403	10.24	2.817	12.53	0.363	9.22	0.029	0.74	11.5	316 SS	C	P
0.266	6.76	67157S	1.000	25.40	0.206	5.23	11.004	1.93	0.283	7.19	3.114	13.85	0.300	7.62	0.030	0.76	9	316 SS	C	P
0.266	6.76	67158S	1.030	26.16	0.202	5.13	8.525	1.49	0.441	11.20	3.760	16.72	0.448	11.38	0.032	0.81	14	316 SS	CG	P
0.266	6.76	67159S	1.030	26.16	0.216	5.49	2.907	0.51	0.626	15.90	1.820	8.10	0.375	9.53	0.025	0.64	14	316 SS	C	P
0.266	6.76	67160S	1.060	26.92	0.210	5.33	4.956	0.87	0.513	13.03	2.542	11.31	0.378	9.60	0.028	0.71	13.5	316 SS	CG	P
0.266	6.76	67161S	1.130	28.70	0.208	5.28	4.920	0.86	0.573	14.55	2.819	12.54	0.479	12.17	0.029	0.74	15.5	316 SS	C	P
0.266	6.76	67162S	1.130	28.70	0.230	5.84	0.614	0.11	0.824	20.93	0.506	2.25	0.306	7.77	0.018	0.46	16	316 SS	C	P
0.266	6.76	67163S	1.160	29.46	0.198	5.03	14.081	2.46	0.319	8.10	4.492	19.98	0.425	10.80	0.034	0.86	11.5	316 SS	C	P
0.266	6.76	67164S	1.160	29.46	0.196	4.98	10.145	1.78	0.482	12.24	4.890	21.75	0.595	15.11	0.035	0.89	17	316 SS	CG	P
0.266	6.76	67165S	1.190	30.23	0.218	5.54	2.660	0.47	0.607	15.42	1.615	7.18	0.336	8.53	0.024	0.61	13	316 SS	C	P
0.266	6.76	67166S	1.190	30.23	0.210	5.33	5.999	1.05	0.424	10.77	2.544	11.32	0.350	8.89	0.028	0.71	11.5	316 SS	C	P
0.266	6.76	67167S	1.250	31.75	0.216	5.49	3.171	0.56	0.574	14.58	1.820	8.10	0.350	8.89	0.025	0.64	13	316 SS	C	P
0.266	6.76	67168S	1.310	33.27	0.206	5.23	3.349	0.59	0.530	13.46	1.775	7.90	0.780	19.81	0.030	0.76	25	316 SS	C	P
0.266	6.76	67169S	1.380	35.05	0.206	5.23	3.668	0.64	0.660	16.76	2.421	10.77	0.720	18.29	0.030	0.76	23	316 SS	C	P
0.266	6.76	67170S	1.380	35.05	0.206	5.23	3.349	0.59	0.600	15.24	2.009	8.94	0.780	19.81	0.030	0.76	25	316 SS	C	P
0.266	6.76	67171S	1.380	35.05	0.236	5.99	0.333	0.06	1.155	29.34	0.385	1.71	0.225	5.72	0.015	0.38	14	316 SS	C	P
0.266	6.76	67172S	1.380	35.05	0.232	5.89	0.676	0.12	0.859	21.82	0.581	2.58	0.221	5.61	0.017	0.43	12	316 SS	C	P
0.266	6.76	67173S	1.440	36.58	0.218	5.54	2.660	0.47	0.607	15.42	1.615	7.18	0.336	8.53	0.024	0.61	13	316 SS	C	P
0.266	6.76	67174S	1.530	38.86	0.196	4.98	10.642	1.86	0.459	11.66	4.885	21.73	0.571	14.50	0.035	0.89	16.3	316 SS	CG	P
0.266	6.76	67175S	1.560	39.62	0.202	5.13	7.869	1.38	0.478	12.14	3.761	16.73	0.512	13.01	0.032	0.81	15	316 SS	C	P
0.266	6.76	67176S	1.690	42.93	0.214	5.44	1.425	0.25	0.884	22.45	1.260	5.60	0.806	20.47	0.026	0.66	31	316 SS	CG	P
0.266	6.76	67177S	1.780	45.21	0.222	5.64	0.524	0.09	0.867	22.02	0.454	2.02	0.913	23.19	0.022	0.56	40.5	316 SS	C	P
0.266	6.76	67178S	1.880	47.75	0.204	5.18	5.930	1.04	0.578	14.68	3.428	15.25	0.558	14.17	0.031	0.79	17	316 SS	C	P
0.266	6.76	67179S	2.000	50.80	0.210	5.33	3.166	0.55	0.803	20.40	2.542	11.31	0.588	14.94	0.028	0.71	20	316 SS	C	P
0.266	6.76	67180S	2.250	57.15	0.214	5.44	1.589	0.28	1.285	32.64	2.042	9.08	0.754	19.15	0.026	0.66	28	316 SS	C	P
0.266	6.76	67181S	2.310	58.67	0.210	5.33	2.478	0.43	1.025	26.04	2.540	11.30	0.728	18.49	0.028	0.71	25	316 SS	C	P
0.266	6.76	68200S	0.220	5.59	0.176	4.47	237.440	41.55	0.040	1.02	9.498	42.25	0.180	4.57	0.045	1.14	4	316 SS	CG	P
0.266	6.76	68201S	0.310	7.87	0.196	4.98	50.725	8.88	0.096	2.44	4.870	21.66	0.175	4.45	0.035	0.89	5	316 SS	CG	P
0.266	6.76	68202S	0.440	11.18	0.184	4.67	77.524	13.57	0.100	2.54	7.752	34.48	0.246	6.25	0.041	1.04	6	316 SS	CG	P
0.266	6.76	68203S	0.500	12.70	0.194	4.93	26.547	4.65	0.194	4.93	5.150	22.91	0.306	7.77	0.036	0.91	8.5	316 SS	CG	P
0.266	6.76	68205S	0.530	13.46	0.180	4.57	81.129	14.20	0.107	2.72	8.681	38.61	0.290	7.37	0.043	1.09	6.8	316 SS	CG	P
0.266	6.76	68206S	0.530	13.46	0.196	4.98	25.363	4.44	0.193	4.90	4.895	21.77	0.280	7.11	0.035	0.89	8	316 SS	CG	P
0.266	6.76	68207S	0.530	13.46	0.202	5.13	20.459	3.58	0.184	4.67	3.764	16.74	0.256	6.50	0.032	0.81	7	316 SS	C	P
0.266	6.76	68208S	0.560	14.22	0.190	4.83	39.983	7.00	0.155	3.94	6.197	27.56	0.285	7.24	0.038	0.97	7.5	316 SS	CG	P
0.266	6.76	68209S	0.690	17.53	0.238	6.05	0.214	0.04	0.452	11.48	0.097	0.43	0.238	6.05	0.014	0.36	16	316 SS	C	P
0.266	6.76	68210S	0.690	17.53	0.166	4.22	119.266	20.87	0.110	2.79	13.119	58.35	0.425	10.80	0.050	1.27	8.5	316 SS	CG	P
0.266	6.76	68211S	0.720	18.29	0.184	4.67	34.455	6.03	0.225	5.72	7.752	34.48	0.451	11.46	0.041	1.04	11	316 SS	CG	P
0.266	6.76	68212S	0.880	22.35	0.180	4.57	32.114	5.62	0.271	6.88	8.703	38.71	0.602	15.29	0.043	1.09	14	316 SS	CG	P
0.266	6.76	68213S	0.880	22.35	0.196	4.98	19.022	3.33	0.257	6.53	4.889	21.75	0.385	9.78	0.035	0.89	10	316 SS	C	P
0.266	6.76	68214S	0.940	23.88	0.190	4.83	18.326	3.21	0.339	8.61	6.213	27.64	0.532	13.51	0.038	0.97	14	316 SS	CG	P
0.266	6.76	68216S	1.000	25.40	0.166	4.22	91.203	15.96	0.143	3.63	13.042	58.01	0.525	13.34	0.050	1.27	10.5	316 SS	CG	P
0.266	6.76	68217S	1.090	27.69	0.194	4.93	12.782	2.24	0.415	10.54	5.305	23.60	0.594	15.09	0.036	0.91	15.5	316 SS	C	P
0.266	6.76	68218S	1.130	28.70	0.176	4.47	37.													




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	E n d s	F in s h								
0.281	7.14	67184S	0.250	6.35	0.221	5.61	42.686	7.47	0.069	1.75	2.945	13.10	0.135	3.43	0.030	0.76	3.5	316 SS	C	P
0.281	7.14	67185S	0.310	7.87	0.257	6.53	0.296	0.05	0.220	5.59	0.065	0.29	0.090	2.29	0.012	0.31	6.5	316 SS	C	P
0.281	7.14	67186S	0.410	10.41	0.225	5.72	15.815	2.77	0.153	3.89	2.420	10.76	0.168	4.27	0.028	0.71	5	316 SS	C	P
0.281	7.14	67187S	0.470	11.94	0.213	5.41	36.950	6.47	0.115	2.92	4.249	18.90	0.204	5.18	0.034	0.86	5	316 SS	C	P
0.281	7.14	67188S	0.500	12.70	0.225	5.72	9.489	1.66	0.254	6.45	2.410	10.72	0.224	5.69	0.028	0.71	7	316 SS	C	P
0.281	7.14	67189S	0.500	12.70	0.253	6.43	0.271	0.05	0.328	8.33	0.089	0.40	0.172	4.37	0.014	0.36	11.3	316 SS	C	P
0.281	7.14	67190S	0.500	12.70	0.219	5.56	16.418	2.87	0.198	5.03	3.251	14.46	0.202	5.13	0.031	0.79	6.5	316 SS	CG	P
0.281	7.14	67191S	0.530	13.46	0.241	6.12	2.812	0.49	0.318	8.08	0.894	3.98	0.140	3.56	0.020	0.51	6	316 SS	C	P
0.281	7.14	67192S	0.560	14.22	0.219	5.56	16.418	2.87	0.198	5.03	3.251	14.46	0.233	5.92	0.031	0.79	6.5	316 SS	C	P
0.281	7.14	67193S	0.560	14.22	0.219	5.56	18.470	3.23	0.176	4.47	3.251	14.46	0.217	5.51	0.031	0.79	6	316 SS	C	P
0.281	7.14	67194S	0.590	14.99	0.233	5.92	5.749	1.01	0.266	6.76	1.529	6.80	0.174	4.42	0.024	0.61	6.3	316 SS	C	P
0.281	7.14	67195S	0.630	16.00	0.219	5.56	13.433	2.35	0.243	6.17	3.264	14.52	0.264	6.71	0.031	0.79	7.5	316 SS	C	P
0.281	7.14	67196S	0.630	16.00	0.237	6.02	7.491	1.31	0.158	4.01	1.184	5.27	0.116	2.95	0.022	0.56	4.3	316 SS	C	P
0.281	7.14	67197S	0.690	17.53	0.221	5.61	9.851	1.72	0.300	7.62	2.955	13.14	0.285	7.24	0.030	0.76	8.5	316 SS	C	P
0.281	7.14	67198S	0.690	17.53	0.247	6.27	1.135	0.20	0.485	12.32	0.550	2.45	0.136	3.45	0.017	0.43	7	316 SS	C	P
0.281	7.14	67199S	0.690	17.53	0.233	5.92	6.981	1.22	0.219	5.56	1.529	6.80	0.156	3.96	0.024	0.61	5.5	316 SS	C	P
0.281	7.14	67200S	0.690	17.53	0.217	5.51	15.437	2.70	0.232	5.89	3.581	15.93	0.272	6.91	0.032	0.81	7.5	316 SS	C	P
0.281	7.14	67201S	0.690	17.53	0.233	5.92	2.036	0.36	0.354	8.99	0.721	3.21	0.336	8.53	0.024	0.61	14	316 SS	CG	P
0.281	7.14	67202S	0.690	17.53	0.231	5.87	7.276	1.27	0.237	6.02	1.724	7.67	0.175	4.45	0.025	0.64	6	316 SS	C	P
0.281	7.14	67203S	0.720	18.29	0.231	5.87	4.478	0.78	0.386	9.80	1.729	7.69	0.238	6.05	0.025	0.64	8.5	316 SS	C	P
0.281	7.14	67204S	0.720	18.29	0.233	5.92	3.759	0.66	0.407	10.34	1.530	6.81	0.228	5.79	0.024	0.61	8.5	316 SS	C	P
0.281	7.14	67205S	0.750	19.05	0.225	5.72	7.907	1.38	0.305	7.75	2.412	10.73	0.224	5.69	0.028	0.71	8	316 SS	CG	P
0.281	7.14	67206S	0.750	19.05	0.231	5.87	4.478	0.78	0.386	9.80	1.729	7.69	0.238	6.05	0.025	0.64	8.5	316 SS	C	P
0.281	7.14	67207S	0.880	22.35	0.249	6.33	0.400	0.07	0.656	16.66	0.262	1.17	0.224	5.69	0.016	0.41	13	316 SS	C	P
0.281	7.14	67208S	0.880	22.35	0.213	5.41	13.355	2.34	0.320	8.13	4.274	19.01	0.350	8.89	0.034	0.86	10.3	316 SS	CG	P
0.281	7.14	67209S	0.880	22.35	0.241	6.12	1.731	0.30	0.516	13.11	0.893	3.97	0.190	4.83	0.020	0.51	8.5	316 SS	C	P
0.281	7.14	67210S	0.910	23.11	0.201	5.11	25.401	4.45	0.270	6.86	6.858	30.50	0.440	11.18	0.040	1.02	11	316 SS	CG	P
0.281	7.14	67211S	0.940	23.88	0.241	6.12	1.250	0.22	0.700	17.78	0.875	3.89	0.240	6.10	0.020	0.51	11	316 SS	C	P
0.281	7.14	67212S	0.940	23.88	0.245	6.22	1.110	0.19	0.588	14.94	0.653	2.91	0.171	4.34	0.018	0.46	8.5	316 SS	C	P
0.281	7.14	67213S	0.940	23.88	0.245	6.22	0.962	0.17	0.679	17.25	0.653	2.91	0.189	4.80	0.018	0.46	9.5	316 SS	C	P
0.281	7.14	67214S	1.000	25.40	0.251	6.38	0.280	0.05	0.775	19.69	0.217	0.97	0.225	5.72	0.015	0.38	14	316 SS	C	P
0.281	7.14	67215S	1.000	25.40	0.237	6.02	1.685	0.30	0.703	17.86	1.185	5.27	0.286	7.26	0.022	0.56	12	316 SS	C	P
0.281	7.14	67216S	1.000	25.40	0.199	5.06	31.939	5.59	0.231	5.87	7.378	32.82	0.410	10.41	0.041	1.04	10	316 SS	CG	P
0.281	7.14	67217S	1.000	25.40	0.219	5.56	8.396	1.47	0.388	9.86	3.258	14.49	0.366	9.30	0.031	0.79	10.8	316 SS	C	P
0.281	7.14	67218S	1.000	25.40	0.225	5.72	3.389	0.59	0.524	13.31	1.776	7.90	0.476	12.09	0.028	0.71	16	316 SS	C	P
0.281	7.14	67219S	1.000	25.40	0.251	6.38	0.374	0.07	0.820	20.83	0.307	1.37	0.180	4.57	0.015	0.38	11	316 SS	C	P
0.281	7.14	67220S	1.090	27.69	0.245	6.22	0.801	0.14	0.815	20.70	0.653	2.91	0.216	5.49	0.018	0.46	11	316 SS	C	P
0.281	7.14	67221S	1.090	27.69	0.229	5.82	3.828	0.67	0.507	12.88	1.941	8.63	0.312	7.93	0.026	0.66	11	316 SS	C	P
0.281	7.14	67222S	1.130	28.70	0.213	5.41	8.033	1.41	0.532	13.51	4.274	19.01	0.571	14.50	0.034	0.86	15.8	316 SS	C	P
0.281	7.14	67223S	1.130	28.70	0.213	5.41	10.077	1.76	0.423	10.74	4.263	18.96	0.476	12.09	0.034	0.86	13	316 SS	C	P
0.281	7.14	67224S	1.130	28.70	0.225	5.72	4.199	0.74	0.574	14.58	2.410	10.72	0.400	10.16	0.028	0.71	13.3	316 SS	C	P
0.281	7.14	67225S	1.130	28.70	0.221	5.61	5.821	1.02	0.508	12.90	2.957	13.15	0.420	10.67	0.030	0.76	13	316 SS	C	P
0.281	7.14	67226S	1.190	30.23	0.233	5.92	2.221	0.39	0.689	17.50	1.530	6.81	0.336	8.53	0.024	0.61	13	316 SS	C	P
0.281	7.14	67227S	1.250	31.75	0.265	6.73	0.031	0.01	1.162	29.52	0.036	0.16	0.088	2.24	0.008	0.20	10	316 SS	C	P
0.281	7.14	67228S	1.250	31.75	0.225	5.72	4.518	0.79	0.534	13.56	2.413	10.73	0.378	9.60	0.028	0.71	12.5	316 SS	C	P
0.281	7.14	67229S	1.250	31.75	0.219	5.56	6.157	1.08	0.529	13.44	3.257	14.49	0.465	11.81	0.031	0.79	14	316 SS	C	P
0.281	7.14	67230S	1.250	31.75	0.245	6.22	0.902	0.16	0.724	18.39	0.653	2.91	0.198	5.03	0.018	0.46	10	316 SS	C	P
0.281	7.14	67231S	1.250	31.75	0.225	5.72	4.126	0.72	0.585	14.86	2.414	10.74	0.406	10.31	0.028	0.71	13.5	316 SS	C	P
0.281	7.14	67232S	1.250	31.75	0.245	6.22	0.555	0.10	0.962	24.44	0.534	2.38	0.288	7.32	0.018	0.46	15	316 SS	C	P
0.281	7.14	67233S	1.310	33.27	0.237	6.02	2.107	0.37	0.562	14.28	1.184	5.27	0.242	6.15	0.022	0.56	10	316 SS	C	P
0.281	7.14	67234S	1.340	34.04	0.229	5.82	3.132	0.55	0.619	15.72	1.939	8.63	0.364	9.25	0.026	0.66	13	316 SS	C	P
0.281	7.14	67235S	1.380	35.05	0.181	4.60	37.283	6.53	0.334	8.48	12.453	55.39	0.950	24.13	0.050	1.27	19	316 SS	CG	P
0.281	7.14	67236S	1.380	35.05	0.221	5.61	3.557	0.62	0.750	19.05	2.668	11.87	0.630	16.00	0.030	0.76	20	316 SS	C	P
0.281	7.14	67237S	1.380	35.05	0.225	5.72	3.796	0.66	0.635	16.13	2.410	10.72	0.434	11.02	0.028	0.71	14.5	316 SS	C	P
0.281	7.14	6723																		




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg Max. Defl. Inches	Sugg Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish								
mm		mm	mm	N/mm	mm	N	mm	mm												
0.281	7.14	68246S	0.560	14.22	0.186	4.72	90.878	15.90	0.119	3.02	10.814	48.10	0.356	9.04	0.048	1.21	7.5	316 SS	CG	P
0.281	7.14	68247S	0.630	16.00	0.201	5.11	38.102	6.67	0.180	4.57	6.858	30.50	0.320	8.13	0.040	1.02	8	316 SS	CG	P
0.281	7.14	68248S	0.690	17.53	0.181	4.60	90.543	15.85	0.138	3.51	12.495	55.58	0.450	11.43	0.050	1.27	9	316 SS	CG	P
0.281	7.14	68249S	0.690	17.53	0.186	4.72	90.878	15.90	0.119	3.02	10.814	48.10	0.356	9.04	0.048	1.21	7.5	316 SS	CG	P
0.281	7.14	68250S	0.780	19.81	0.201	5.11	25.401	4.45	0.270	6.86	6.858	30.50	0.440	11.18	0.040	1.02	11	316 SS	CG	P
0.281	7.14	68251S	0.840	21.34	0.191	4.85	48.745	8.53	0.193	4.90	9.408	41.85	0.450	11.43	0.045	1.14	10	316 SS	CG	P
0.281	7.14	68252S	0.880	22.35	0.211	5.36	15.750	2.76	0.295	7.49	4.646	20.67	0.350	8.89	0.035	0.89	10	316 SS	CG	P
0.281	7.14	68253S	0.880	22.35	0.209	5.31	17.846	3.12	0.283	7.19	5.050	22.46	0.396	10.06	0.036	0.91	10	316 SS	C	P
0.281	7.14	68254S	0.910	23.11	0.199	5.06	31.939	5.59	0.231	5.87	7.378	32.82	0.410	10.41	0.041	1.04	10	316 SS	CG	P
0.281	7.14	68255S	1.000	25.40	0.205	5.21	18.165	3.18	0.325	8.26	5.904	26.26	0.456	11.58	0.038	0.97	12	316 SS	CG	P
0.281	7.14	68256S	1.000	25.40	0.181	4.60	70.423	12.32	0.177	4.50	12.465	55.44	0.550	13.97	0.050	1.27	11	316 SS	CG	P
0.281	7.14	68257S	1.000	25.40	0.173	4.39	90.867	15.90	0.171	4.34	15.538	69.11	0.648	16.46	0.054	1.37	12	316 SS	CG	P
0.281	7.14	68259S	1.000	25.40	0.211	5.36	10.244	1.79	0.453	11.51	4.641	20.64	0.501	12.73	0.035	0.89	14.3	316 SS	CG	P
0.281	7.14	68260S	1.060	26.92	0.201	5.11	19.051	3.33	0.359	9.12	6.839	30.42	0.560	14.22	0.040	1.02	14	316 SS	CG	P
0.281	7.14	68261S	1.090	27.69	0.211	5.36	9.692	1.70	0.479	12.17	4.642	20.65	0.525	13.34	0.035	0.89	15	316 SS	CG	P
0.281	7.14	68262S	1.130	28.70	0.211	5.36	11.455	2.01	0.405	10.29	4.639	20.63	0.490	12.45	0.035	0.89	13	316 SS	C	P
0.281	7.14	68263S	1.250	31.75	0.195	4.95	31.700	5.55	0.261	6.63	8.274	36.80	0.516	13.11	0.043	1.09	12	316 SS	CG	P
0.281	7.14	68264S	1.250	31.75	0.231	5.87	1.743	0.31	0.757	19.23	1.319	5.87	0.493	12.52	0.025	0.64	18.7	316 SS	C	P
0.281	7.14	68265S	1.250	31.75	0.213	5.41	9.237	1.62	0.462	11.74	4.267	18.98	0.476	12.09	0.034	0.86	14	316 SS	CG	P
0.281	7.14	68266S	1.250	31.75	0.181	4.60	48.754	8.53	0.256	6.50	12.481	55.52	0.750	19.05	0.050	1.27	15	316 SS	CG	P
0.281	7.14	68268S	1.280	32.51	0.211	5.36	14.000	2.45	0.332	8.43	4.648	20.67	0.385	9.78	0.035	0.89	11	316 SS	CG	P
0.281	7.14	68269S	1.310	33.27	0.199	5.06	28.390	4.97	0.260	6.60	7.381	32.83	0.451	11.46	0.041	1.04	11	316 SS	CG	P
0.281	7.14	68270S	1.340	34.04	0.191	4.85	28.886	5.06	0.326	8.28	9.417	41.89	0.743	18.87	0.045	1.14	15.5	316 SS	C	P
0.281	7.14	68271S	1.380	35.05	0.181	4.60	63.380	11.09	0.197	5.00	12.486	55.54	0.600	15.24	0.050	1.27	12	316 SS	CG	P
0.281	7.14	68272S	1.500	38.10	0.171	4.34	82.576	14.45	0.194	4.93	16.020	71.26	0.770	19.56	0.055	1.40	14	316 SS	CG	P
0.281	7.14	68273S	1.630	41.40	0.199	5.06	14.769	2.59	0.499	12.68	7.370	32.78	0.791	20.09	0.041	1.04	19.3	316 SS	CG	P
0.281	7.14	61562S	0.250	6.35	0.225	5.72	24.630	4.31	0.098	2.48	2.413	10.72	0.113	2.87	0.028	0.71	3.9	316 SS	CG	P
0.281	7.14	61563S	0.310	7.95	0.225	5.72	18.590	3.26	0.129	3.28	2.398	10.66	0.131	3.33	0.028	0.71	4.5	316 SS	CG	P
0.281	7.14	61564S	0.380	9.53	0.225	5.72	14.980	2.62	0.160	4.07	2.396	10.65	0.149	3.78	0.028	0.71	5.2	316 SS	CG	P
0.281	7.14	61565S	0.440	11.13	0.225	5.72	12.510	2.19	0.192	4.88	2.401	10.67	0.167	4.23	0.028	0.71	5.8	316 SS	CG	P
0.281	7.14	61566S	0.500	12.70	0.225	5.72	10.760	1.88	0.223	5.67	2.399	10.66	0.184	4.68	0.028	0.71	6.4	316 SS	CG	P
0.281	7.14	61567S	0.560	14.30	0.225	5.72	9.420	1.65	0.255	6.47	2.403	10.68	0.202	5.14	0.028	0.71	7	316 SS	CG	P
0.281	7.14	61568S	0.630	15.88	0.225	5.72	8.400	1.47	0.286	7.26	2.402	10.68	0.220	5.59	0.028	0.71	7.6	316 SS	CG	P
0.281	7.14	61569S	0.750	19.05	0.225	5.72	6.880	1.21	0.349	8.85	2.403	10.68	0.256	6.50	0.028	0.71	8.9	316 SS	CG	P
0.281	7.14	61570S	0.880	22.23	0.225	5.72	5.830	1.02	0.412	10.45	2.404	10.68	0.292	7.40	0.028	0.71	10.1	316 SS	CG	P
0.281	7.14	61571S	1.000	25.40	0.225	5.72	5.060	0.89	0.475	12.05	2.404	10.68	0.327	8.31	0.028	0.71	11.4	316 SS	CG	P
0.281	7.14	61572S	1.250	31.75	0.225	5.72	4.000	0.70	0.600	15.23	2.401	10.67	0.399	10.12	0.028	0.71	13.8	316 SS	CG	P
0.281	7.14	61573S	1.380	34.93	0.225	5.72	3.620	0.63	0.663	16.84	2.401	10.67	0.434	11.03	0.028	0.71	15.1	316 SS	CG	P
0.281	7.14	61574S	1.500	38.10	0.225	5.72	3.310	0.58	0.726	18.41	2.402	10.68	0.470	11.94	0.028	0.71	16.3	316 SS	CG	P
0.296	7.52	64033S	0.630	16.00	0.201	5.11	82.935	14.51	0.124	3.15	10.284	45.74	0.380	9.65	0.048	1.21	7	316 SS	C	P
0.296	7.52	64034S	0.630	16.00	0.232	5.89	15.830	2.77	0.215	5.46	3.403	15.14	0.240	6.10	0.032	0.81	6.5	316 SS	C	P
0.296	7.52	64035S	0.690	17.53	0.201	5.11	75.395	13.19	0.137	3.48	10.329	45.94	0.404	10.26	0.048	1.21	7.5	316 SS	C	P
0.296	7.52	64036S	0.810	20.57	0.201	5.11	59.239	10.37	0.174	4.42	10.308	45.85	0.475	12.07	0.048	1.21	9	316 SS	C	P
0.296	7.52	64037S	0.810	20.57	0.260	6.60	0.873	0.15	0.630	16.00	0.550	2.45	0.180	4.57	0.018	0.46	9	316 SS	C	P
0.296	7.52	64038S	0.840	21.34	0.256	6.50	1.409	0.25	0.603	15.32	0.850	3.78	0.195	4.95	0.020	0.51	8.8	316 SS	C	P
0.296	7.52	64039S	0.880	22.35	0.256	6.50	1.903	0.33	0.446	11.33	0.849	3.78	0.160	4.06	0.020	0.51	7	316 SS	C	P
0.296	7.52	64040S	0.880	22.35	0.214	5.44	21.302	3.73	0.330	8.38	7.030	31.27	0.533	13.54	0.041	1.04	12	316 SS	C	P
0.296	7.52	64041S	1.250	31.75	0.232	5.89	7.124	1.25	0.478	12.14	3.405	15.15	0.416	10.57	0.032	0.81	12	316 SS	C	P
0.296	7.52	67251S	0.280	7.11	0.260	6.60	2.036	0.36	0.190	4.83	0.387	1.72	0.090	2.29	0.018	0.46	5	316 SS	CG	P
0.296	7.52	67252S	0.300	7.62	0.214	5.44	106.511	18.64	0.066	1.68	7.030	31.27	0.205	5.21	0.041	1.04	4	316 SS	C	P
0.296	7.52	67253S	0.340	8.64	0.236	5.99	17.932	3.14	0.157	3.99	2.815	12.52	0.180	4.57	0.030	0.76	5	316 SS	C	P
0.296	7.52	67254S	0.340	8.64	0.266	6.76	0.815	0.14	0.242	6.15	0.197	0.88	0.098	2.49	0.015	0.38	5.5	316 SS	C	P
0.296	7.52	67255S	0.380	9.65	0.280	7.11	0.016	0.00	0.252	6.40	0.004	0.02	0.128	3.25	0.008	0.20	15	316 SS	C	P
0.296	7.52	67256S	0.380																	




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm		Wire Dia. Inches mm		Total Coils	Mat'l	Ends	Finish			
0.296	7.52	67278S	0.590	14.99	0.268	6.81	0.476	0.08	0.485	12.32	0.231	1.03	0.105	2.67	0.014	0.36	6.5	316 SS	C	P
0.296	7.52	67279S	0.630	16.00	0.246	6.25	7.010	1.23	0.234	5.94	1.640	7.30	0.163	4.14	0.025	0.64	5.5	316 SS	C	P
0.296	7.52	67280S	0.630	16.00	0.270	6.86	0.286	0.05	0.519	13.18	0.148	0.66	0.111	2.82	0.013	0.33	7.5	316 SS	C	P
0.296	7.52	67281S	0.630	16.00	0.216	5.49	50.863	8.90	0.129	3.28	6.561	29.18	0.230	5.84	0.040	1.02	5.8	316 SS	CG	P
0.296	7.52	67282S	0.630	16.00	0.252	6.40	4.745	0.83	0.237	6.02	1.125	5.00	0.110	2.79	0.022	0.56	5	316 SS	CG	P
0.296	7.52	67283S	0.630	16.00	0.246	6.25	3.774	0.66	0.417	10.59	1.574	7.00	0.213	5.41	0.025	0.64	8.5	316 SS	CG	P
0.296	7.52	67284S	0.660	16.76	0.256	6.50	1.903	0.33	0.446	11.33	0.849	3.78	0.160	4.06	0.020	0.51	7	316 SS	C	P
0.296	7.52	67285S	0.660	16.76	0.236	5.99	11.955	2.09	0.236	5.99	2.821	12.55	0.195	4.95	0.030	0.76	6.5	316 SS	CG	P
0.296	7.52	67286S	0.690	17.53	0.254	6.45	3.340	0.59	0.294	7.47	0.982	4.37	0.116	2.95	0.021	0.53	5.5	316 SS	CG	P
0.296	7.52	67287S	0.690	17.53	0.236	5.99	10.759	1.88	0.262	6.66	2.819	12.54	0.240	6.10	0.030	0.76	7	316 SS	C	P
0.296	7.52	67288S	0.690	17.53	0.238	6.05	8.445	1.48	0.302	7.67	2.550	11.34	0.218	5.54	0.029	0.74	7.5	316 SS	CG	P
0.296	7.52	67289S	0.690	17.53	0.236	5.99	9.781	1.71	0.288	7.32	2.817	12.53	0.225	5.72	0.030	0.76	7.5	316 SS	CG	P
0.296	7.52	67290S	0.720	18.29	0.238	6.05	7.741	1.36	0.329	8.36	2.547	11.33	0.232	5.89	0.029	0.74	8	316 SS	CG	P
0.296	7.52	67291S	0.750	19.05	0.244	6.20	4.643	0.81	0.398	10.11	1.848	8.22	0.241	6.12	0.026	0.66	8.3	316 SS	C	P
0.296	7.52	67292S	0.750	19.05	0.266	6.76	0.456	0.08	0.611	15.52	0.279	1.24	0.139	3.53	0.015	0.38	8.3	316 SS	C	P
0.296	7.52	67293S	0.750	19.05	0.252	6.40	3.559	0.62	0.316	8.03	1.125	5.00	0.154	3.91	0.022	0.56	6	316 SS	C	P
0.296	7.52	67294S	0.750	19.05	0.256	6.50	0.732	0.13	0.450	11.43	0.329	0.300	7.62	0.020	0.51	15	316 SS	CG	P	
0.296	7.52	67295S	0.750	19.05	0.256	6.50	1.057	0.19	0.510	12.95	0.539	2.40	0.240	6.10	0.020	0.51	11	316 SS	C	P
0.296	7.52	67296S	0.750	19.05	0.252	6.40	2.190	0.38	0.514	13.06	1.126	5.01	0.209	5.31	0.022	0.56	8.5	316 SS	C	P
0.296	7.52	67297S	0.780	19.81	0.256	6.50	2.378	0.42	0.357	9.07	0.849	3.78	0.140	3.56	0.020	0.51	6	316 SS	C	P
0.296	7.52	67298S	0.810	20.57	0.246	6.25	4.907	0.86	0.335	8.51	1.644	7.31	0.175	4.45	0.025	0.64	7	316 SS	CG	P
0.296	7.52	67299S	0.810	20.57	0.232	5.89	8.095	1.42	0.421	10.69	3.408	15.16	0.346	8.79	0.032	0.81	10.8	316 SS	CG	P
0.296	7.52	67300S	0.840	21.34	0.262	6.66	0.687	0.12	0.670	17.02	0.460	2.05	0.170	4.32	0.017	0.43	9	316 SS	C	P
0.296	7.52	67301S	0.880	22.35	0.270	6.86	0.274	0.05	0.766	19.46	0.210	0.93	0.114	2.90	0.013	0.33	7.8	316 SS	C	P
0.296	7.52	67302S	0.880	22.35	0.248	6.30	4.580	0.80	0.318	8.08	1.456	6.48	0.156	3.96	0.024	0.61	6.5	316 SS	CG	P
0.296	7.52	67303S	0.880	22.35	0.232	5.89	11.254	1.97	0.303	7.70	3.410	15.17	0.267	6.78	0.032	0.81	8.3	316 SS	CG	P
0.296	7.52	67304S	0.880	22.35	0.256	6.50	2.378	0.42	0.357	9.07	0.849	3.78	0.120	3.05	0.020	0.51	6	316 SS	CG	P
0.296	7.52	67305S	0.880	22.35	0.260	6.60	0.643	0.11	0.655	16.64	0.421	1.87	0.225	5.72	0.018	0.46	11.5	316 SS	C	P
0.296	7.52	67306S	0.940	23.88	0.234	5.94	6.892	1.21	0.449	11.41	3.095	13.77	0.341	8.66	0.031	0.79	11	316 SS	CG	P
0.296	7.52	67307S	0.970	24.64	0.228	5.79	11.610	2.03	0.350	8.89	4.064	18.08	0.374	9.50	0.034	0.86	10	316 SS	C	P
0.296	7.52	67308S	1.000	25.40	0.266	6.76	0.439	0.08	0.838	21.29	0.368	1.64	0.143	3.63	0.015	0.38	8.5	316 SS	C	P
0.296	7.52	67309S	1.000	25.40	0.240	6.10	2.609	0.46	0.488	12.40	1.273	5.66	0.512	13.01	0.028	0.71	17.3	316 SS	C	P
0.296	7.52	67310S	1.000	25.40	0.232	5.89	7.915	1.39	0.430	10.92	3.403	15.14	0.384	9.75	0.032	0.81	11	316 SS	C	P
0.296	7.52	67311S	1.000	25.40	0.236	5.99	10.759	1.88	0.262	6.66	2.819	12.54	0.240	6.10	0.030	0.76	7	316 SS	C	P
0.296	7.52	67312S	1.000	25.40	0.236	5.99	6.725	1.18	0.419	10.64	2.818	12.53	0.330	8.38	0.030	0.76	10	316 SS	C	P
0.296	7.52	67313S	1.000	25.40	0.244	6.20	2.931	0.51	0.630	16.00	1.847	8.22	0.335	8.51	0.026	0.66	11.9	316 SS	C	P
0.296	7.52	67314S	1.000	25.40	0.240	6.10	4.989	0.87	0.460	11.68	2.295	10.21	0.308	7.82	0.028	0.71	10	316 SS	C	P
0.296	7.52	67315S	1.060	26.92	0.254	6.45	1.299	0.23	0.755	19.18	0.981	4.36	0.252	6.40	0.021	0.53	11	316 SS	C	P
0.296	7.52	67316S	1.130	28.70	0.232	5.89	6.194	1.08	0.550	13.97	3.407	15.15	0.432	10.97	0.032	0.81	13.5	316 SS	CG	P
0.296	7.52	67317S	1.130	28.70	0.220	5.59	15.976	2.80	0.353	8.97	5.640	25.09	0.437	11.10	0.038	0.97	11.5	316 SS	CG	P
0.296	7.52	67318S	1.130	28.70	0.248	6.30	2.169	0.38	0.671	17.04	1.455	6.47	0.300	7.62	0.024	0.61	11.5	316 SS	C	P
0.296	7.52	67319S	1.190	30.23	0.254	6.45	1.257	0.22	0.780	19.81	0.980	4.36	0.258	6.55	0.021	0.53	11.3	316 SS	C	P
0.296	7.52	67320S	1.190	30.23	0.256	6.50	1.119	0.20	0.759	19.28	0.849	3.78	0.210	5.33	0.020	0.51	10.5	316 SS	CG	P
0.296	7.52	67321S	1.190	30.23	0.236	5.99	4.138	0.72	0.681	17.30	2.818	12.53	0.480	12.19	0.030	0.76	15	316 SS	C	P
0.296	7.52	67322S	1.250	31.75	0.256	6.50	1.189	0.21	0.714	18.14	0.849	3.78	0.220	5.59	0.020	0.51	10	316 SS	C	P
0.296	7.52	67323S	1.250	31.75	0.240	6.10	3.326	0.58	0.691	17.55	2.298	10.22	0.420	10.67	0.028	0.71	14	316 SS	C	P
0.296	7.52	67324S	1.250	31.75	0.236	5.99	3.362	0.59	0.710	18.03	2.387	10.62	0.540	13.72	0.030	0.76	18	316 SS	CG	P
0.296	7.52	67325S	1.310	33.27	0.244	6.20	3.225	0.56	0.572	14.53	1.845	8.21	0.286	7.26	0.026	0.66	11	316 SS	CG	P
0.296	7.52	67326S	1.380	35.05	0.240	6.10	3.801	0.67	0.605	15.37	2.300	10.23	0.378	9.60	0.028	0.71	12.5	316 SS	C	P
0.296	7.52	67327S	1.380	35.05	0.234	5.94	4.135	0.72	0.749	19.03	3.097	13.78	0.558	14.17	0.031	0.79	17	316 SS	C	P
0.296	7.52	67328S	1.380	35.05	0.218	5.54	17.036	2.98	0.357	9.07	6.082	27.05	0.507	12.88	0.039	0.99	12	316 SS	C	P
0.296	7.52	67329S	1.380	35.05	0.236	5.99	5.380	0.94	0.524	13.31	2.819	12.54	0.360	9.14	0.030	0.76	12	316 SS	CG	P
0.296	7.52	67330S	1.380	35.05	0.256	6.50	1.359	0.24	0.625	15.88	0.849	3.78	0.200	5.08	0.020	0.51	9	316 SS	C	P
0.296	7.52	67331S	1.410	35.81	0.248	6.30	2.290	0.40	0.636	16.15	1.456	6.48								




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg Max. Defl. Inches	Sugg Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish								
mm		mm	mm	N/mm	mm	N	mm	mm												
0.296	7.52	68287S	0.500	12.70	0.206	5.23	92.613	16.21	0.097	2.46	8.983	39.96	0.248	6.30	0.045	1.14	5.5	316 SS	CG	P
0.296	7.52	68288S	0.500	12.70	0.232	5.89	14.247	2.49	0.239	6.07	3.405	15.15	0.256	6.50	0.032	0.81	7	316 SS	C	P
0.296	7.52	68289S	0.530	13.46	0.188	4.78	187.490	32.81	0.079	2.01	14.812	65.88	0.324	8.23	0.054	1.37	6	316 SS	CG	P
0.296	7.52	68290S	0.530	13.46	0.201	5.11	92.149	16.13	0.112	2.85	10.321	45.91	0.309	7.85	0.048	1.21	6.5	316 SS	CG	P
0.296	7.52	68291S	0.560	14.22	0.201	5.11	103.668	18.14	0.099	2.52	10.263	45.65	0.333	8.46	0.048	1.21	6	316 SS	C	P
0.296	7.52	68292S	0.590	14.99	0.228	5.79	18.576	3.25	0.219	5.56	4.068	18.09	0.238	6.05	0.034	0.86	7	316 SS	CG	P
0.296	7.52	68293S	0.630	16.00	0.228	5.79	18.576	3.25	0.219	5.56	4.068	18.09	0.272	6.91	0.034	0.86	7	316 SS	C	P
0.296	7.52	68294S	0.630	16.00	0.194	4.93	82.148	14.38	0.154	3.91	12.651	56.27	0.459	11.66	0.051	1.30	9	316 SS	CG	P
0.296	7.52	68295S	0.660	16.76	0.224	5.69	26.545	4.65	0.181	4.60	4.805	21.37	0.270	6.86	0.036	0.91	6.5	316 SS	C	P
0.296	7.52	68296S	0.690	17.53	0.212	5.39	39.560	6.92	0.186	4.72	7.358	32.73	0.336	8.53	0.042	1.07	8	316 SS	CG	P
0.296	7.52	68297S	0.690	17.53	0.206	5.23	58.935	10.31	0.153	3.89	9.017	40.11	0.383	9.73	0.045	1.14	7.5	316 SS	C	P
0.296	7.52	68298S	0.720	18.29	0.180	4.57	209.856	36.73	0.085	2.16	17.838	79.34	0.406	10.31	0.058	1.47	7	316 SS	CG	P
0.296	7.52	68299S	0.750	19.05	0.224	5.69	23.891	4.18	0.201	5.11	4.802	21.36	0.288	7.32	0.036	0.91	7	316 SS	C	P
0.296	7.52	68300S	0.750	19.05	0.206	5.23	48.021	8.40	0.188	4.78	9.028	40.16	0.394	10.01	0.045	1.14	8.8	316 SS	CG	P
0.296	7.52	68301S	0.750	19.05	0.201	5.11	59.239	10.37	0.174	4.42	10.308	45.85	0.475	12.07	0.048	1.21	9	316 SS	C	P
0.296	7.52	68302S	0.750	19.05	0.216	5.49	31.789	5.56	0.206	5.23	6.549	29.13	0.320	8.13	0.040	1.02	8	316 SS	CG	P
0.296	7.52	68303S	0.750	19.05	0.216	5.49	38.147	6.68	0.171	4.34	6.523	29.01	0.320	8.13	0.040	1.02	7	316 SS	C	P
0.296	7.52	68304S	0.750	19.05	0.201	5.11	69.112	12.10	0.149	3.79	10.298	45.81	0.380	9.65	0.048	1.21	8	316 SS	CG	P
0.296	7.52	68305S	0.780	19.81	0.201	5.11	66.348	11.61	0.155	3.94	10.284	45.74	0.392	9.96	0.048	1.21	8.3	316 SS	CG	P
0.296	7.52	68307S	0.810	20.57	0.206	5.23	44.710	7.82	0.201	5.11	8.987	39.97	0.416	10.57	0.045	1.14	9.3	316 SS	CG	P
0.296	7.52	68308S	0.810	20.57	0.232	5.89	10.177	1.78	0.335	8.51	3.409	15.16	0.288	7.32	0.032	0.81	9	316 SS	CG	P
0.296	7.52	68309S	0.810	20.57	0.206	5.23	44.710	7.82	0.201	5.11	8.987	39.97	0.416	10.57	0.045	1.14	9.3	316 SS	CG	P
0.296	7.52	68310S	0.810	20.57	0.232	5.89	10.177	1.78	0.335	8.51	3.409	15.16	0.288	7.32	0.032	0.81	9	316 SS	CG	P
0.296	7.52	68311S	0.810	20.57	0.201	5.11	57.196	10.01	0.180	4.57	10.295	45.79	0.439	11.15	0.048	1.21	9.3	316 SS	CG	P
0.296	7.52	68312S	0.880	22.35	0.206	5.23	40.518	7.09	0.222	5.64	8.995	40.01	0.450	11.43	0.045	1.14	10	316 SS	CG	P
0.296	7.52	68313S	0.880	22.35	0.206	5.23	29.468	5.16	0.295	7.49	8.693	38.67	0.585	14.86	0.045	1.14	13	316 SS	CG	P
0.296	7.52	68314S	0.880	22.35	0.206	5.23	44.710	7.82	0.201	5.11	8.987	39.97	0.461	11.71	0.045	1.14	9.3	316 SS	C	P
0.296	7.52	68316S	0.940	23.88	0.216	5.49	23.842	4.17	0.274	6.96	6.533	29.06	0.400	10.16	0.040	1.02	10	316 SS	CG	P
0.296	7.52	68317S	0.970	24.64	0.228	5.79	13.269	2.32	0.307	7.80	4.074	18.12	0.340	8.64	0.034	0.86	9	316 SS	C	P
0.296	7.52	68318S	0.970	24.64	0.220	5.59	18.971	3.32	0.297	7.54	5.634	25.06	0.418	10.62	0.038	0.97	10	316 SS	C	P
0.296	7.52	68319S	0.970	24.64	0.220	5.59	18.971	3.32	0.297	7.54	5.634	25.06	0.380	9.65	0.038	0.97	10	316 SS	CG	P
0.296	7.52	68320S	0.980	24.89	0.210	5.33	31.046	5.43	0.254	6.45	7.886	35.08	0.452	11.48	0.043	1.09	10.5	316 SS	CG	P
0.296	7.52	68322S	1.000	25.40	0.196	4.98	45.634	7.99	0.261	6.63	11.910	52.98	0.675	17.15	0.050	1.27	13.5	316 SS	CG	P
0.296	7.52	68323S	1.000	25.40	0.206	5.23	38.135	6.67	0.236	5.99	9.000	40.03	0.518	13.16	0.045	1.14	10.5	316 SS	C	P
0.296	7.52	68324S	1.130	28.70	0.210	5.33	26.389	4.62	0.299	7.60	7.890	35.10	0.516	13.11	0.043	1.09	12	316 SS	CG	P
0.296	7.52	68325S	1.250	31.75	0.216	5.49	17.340	3.04	0.377	9.58	6.537	29.08	0.560	14.22	0.040	1.02	13	316 SS	C	P
0.296	7.52	68326S	1.250	31.75	0.186	4.72	74.288	13.00	0.207	5.26	15.378	68.40	0.715	18.16	0.055	1.40	13	316 SS	CG	P
0.296	7.52	68327S	1.280	32.51	0.180	4.57	123.445	21.60	0.144	3.66	17.776	79.07	0.609	15.47	0.058	1.47	10.5	316 SS	CG	P
0.296	7.52	68328S	1.280	32.51	0.188	4.78	53.569	9.38	0.278	7.06	14.892	66.24	0.864	21.95	0.054	1.37	16	316 SS	CG	P
0.296	7.52	68330S	1.310	33.27	0.206	5.23	28.186	4.93	0.320	8.13	9.020	40.12	0.608	15.44	0.045	1.14	13.5	316 SS	CG	P
0.296	7.52	68331S	1.380	35.05	0.214	5.44	14.201	2.49	0.494	12.55	7.015	31.20	0.738	18.75	0.041	1.04	17	316 SS	C	P
0.296	7.52	68332S	1.380	35.05	0.210	5.33	21.111	3.69	0.374	9.50	7.896	35.12	0.624	15.85	0.043	1.09	14.5	316 SS	CG	P
0.296	7.52	68333S	1.500	38.10	0.206	5.23	23.153	4.05	0.389	9.88	9.007	40.06	0.765	19.43	0.045	1.14	16	316 SS	C	P
0.296	7.52	68334S	1.500	38.10	0.226	5.74	8.116	1.42	0.546	13.87	4.431	19.71	0.525	13.34	0.035	0.89	15	316 SS	CG	P
0.296	7.52	68335S	1.660	42.16	0.220	5.59	9.198	1.61	0.612	15.55	5.629	25.04	0.703	17.86	0.038	0.97	18.5	316 SS	CG	P
0.296	7.52	68337S	1.720	43.69	0.224	5.69	7.466	1.31	0.643	16.33	4.801	21.36	0.648	16.46	0.036	0.91	18	316 SS	CG	P
0.296	7.52	68338S	1.780	45.21	0.214	5.44	13.482	2.36	0.521	13.23	7.024	31.24	0.730	18.54	0.041	1.04	17.8	316 SS	CG	P
0.296	7.52	68339S	1.880	47.75	0.218	5.54	10.991	1.92	0.553	14.05	6.078	27.04	0.722	18.34	0.039	0.99	17.5	316 SS	C	P
0.296	7.52	68341S	2.000	50.80	0.206	5.23	18.008	3.15	0.500	12.70	9.004	40.05	0.900	22.86	0.045	1.14	20	316 SS	CG	P
0.296	7.52	68342S	2.090	53.09	0.218	5.54	8.827	1.55	0.688	17.48	6.073	27.01	0.831	21.11	0.039	0.99	21.3	316 SS	CG	P
0.296	7.52	68343S	2.160	54.86	0.206	5.23	13.506	2.36	0.667	16.94	9.009	40.07	1.215	30.86	0.045	1.14	26	316 SS	C	P
0.296	7.52	64042S	1.690	42.93	0.171	4.34	88.129	15.42	0.244	6.20	21.503	95.65	1.250	31.75	0.063	1.59	19	316 SS	C	P
0.300	7.62	67343S	0.470	11.94	0.258	6.55	2.357	0.41	0.307	7.80	0.724	3.22	0.163	4.14	0.021	0.53	6.8	316 SS	C	P
0.300																				




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm		Wire Dia. Inches mm		Total Coils	Mat'l	E n d s F n d s h		
		Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm	Inches	mm	Wire Dia.	Inches	mm				
0.300	7.62	61490S	0.750	19.05	0.248	6.30	6.200	1.09	0.294	7.45	1.823	8.10	0.170	4.32	0.026	0.66	6.5	316 SS CG P
0.300	7.62	61491S	0.810	20.65	0.248	6.30	5.800	1.02	0.314	7.96	1.821	8.09	0.183	4.65	0.026	0.66	6.8	316 SS CG P
0.300	7.62	61492S	0.880	22.23	0.248	6.30	5.000	0.88	0.364	9.23	1.820	8.09	0.206	5.23	0.026	0.66	7.6	316 SS CG P
0.300	7.62	61493S	0.940	23.83	0.248	6.30	4.600	0.81	0.396	10.04	1.822	8.10	0.209	5.31	0.026	0.66	8	316 SS CG P
0.300	7.62	61494S	1.000	25.40	0.248	6.30	4.200	0.74	0.433	10.99	1.819	8.08	0.229	5.82	0.026	0.66	8.6	316 SS CG P
0.300	7.62	61495S	1.250	31.75	0.248	6.30	3.600	0.63	0.506	12.84	1.822	8.10	0.255	6.48	0.026	0.66	9.7	316 SS CG P
0.300	7.62	61496S	1.500	38.10	0.248	6.30	2.900	0.51	0.628	15.92	1.821	8.09	0.301	7.65	0.026	0.66	11.6	316 SS CG P
0.300	7.62	61497S	1.750	44.45	0.248	6.30	2.500	0.44	0.728	18.47	1.820	8.09	0.343	8.71	0.026	0.66	13.1	316 SS CG P
0.300	7.62	61498S	2.000	50.80	0.248	6.30	2.200	0.39	0.827	21.01	1.819	8.08	0.384	9.75	0.026	0.66	14.6	316 SS CG P
0.300	7.62	61499S	2.250	57.15	0.248	6.30	1.900	0.33	0.958	24.29	1.820	8.09	0.436	11.07	0.026	0.66	16.6	316 SS CG P
0.300	7.62	61500S	2.500	63.50	0.248	6.30	1.700	0.30	1.071	27.14	1.821	8.09	0.479	12.17	0.026	0.66	18.3	316 SS CG P
0.300	7.62	61641S	0.440	11.13	0.240	6.10	16.700	2.93	0.165	4.19	2.756	12.25	0.153	3.89	0.030	0.76	5.1	316 SS CG P
0.300	7.62	61642S	0.500	12.70	0.240	6.10	14.200	2.49	0.194	4.93	2.755	12.24	0.168	4.27	0.030	0.76	5.6	316 SS CG P
0.300	7.62	61643S	0.560	14.30	0.240	6.10	12.500	2.19	0.221	5.60	2.763	12.28	0.183	4.65	0.030	0.76	6.1	316 SS CG P
0.300	7.62	61644S	0.630	15.88	0.240	6.10	11.100	1.94	0.249	6.31	2.764	12.28	0.198	5.03	0.030	0.76	6.6	316 SS CG P
0.300	7.62	61645S	0.690	17.48	0.240	6.10	10.000	1.75	0.276	7.00	2.760	12.27	0.213	5.41	0.030	0.76	7.1	316 SS CG P
0.300	7.62	61646S	0.750	19.05	0.240	6.10	9.200	1.61	0.300	7.61	2.760	12.27	0.231	5.87	0.030	0.76	7.6	316 SS CG P
0.300	7.62	61647S	0.810	20.65	0.240	6.10	8.300	1.45	0.332	8.43	2.756	12.25	0.246	6.25	0.030	0.76	8.2	316 SS CG P
0.300	7.62	61648S	0.880	22.23	0.240	6.10	7.700	1.35	0.358	9.09	2.757	12.25	0.261	6.63	0.030	0.76	8.7	316 SS CG P
0.300	7.62	61649S	0.940	23.83	0.240	6.10	7.200	1.26	0.383	9.73	2.758	12.26	0.276	7.01	0.030	0.76	9.1	316 SS CG P
0.300	7.62	61650S	1.000	25.40	0.240	6.10	6.700	1.17	0.412	10.45	2.760	12.27	0.291	7.39	0.030	0.76	9.7	316 SS CG P
0.300	7.62	61651S	1.250	31.75	0.240	6.10	5.200	0.91	0.531	13.46	2.761	12.27	0.353	8.97	0.030	0.76	11.9	316 SS CG P
0.300	7.62	61652S	1.500	38.10	0.240	6.10	4.300	0.75	0.642	16.29	2.761	12.27	0.414	10.52	0.030	0.76	14	316 SS CG P
0.300	7.62	61653S	1.750	44.45	0.240	6.10	3.700	0.65	0.746	18.92	2.760	12.27	0.474	12.04	0.030	0.76	15.9	316 SS CG P
0.300	7.62	61654S	2.000	50.80	0.240	6.10	3.200	0.56	0.862	21.90	2.758	12.26	0.537	13.64	0.030	0.76	18.1	316 SS CG P
0.300	7.62	61655S	2.250	57.15	0.240	6.10	2.900	0.51	0.951	24.14	2.758	12.26	0.608	15.44	0.030	0.76	19.7	316 SS CG P
0.300	7.62	61656S	2.500	63.50	0.240	6.10	2.600	0.46	1.061	26.95	2.759	12.26	0.670	17.02	0.030	0.76	21.8	316 SS CG P
0.300	7.62	61711S	0.440	11.13	0.236	6.00	22.500	3.94	0.148	3.75	3.330	14.80	0.169	4.29	0.032	0.81	5	316 SS CG P
0.300	7.62	61712S	0.500	12.70	0.236	6.00	19.200	3.36	0.173	4.40	3.322	14.76	0.185	4.70	0.032	0.81	5.6	316 SS CG P
0.300	7.62	61713S	0.560	14.30	0.236	6.00	16.700	2.93	0.199	5.06	3.323	14.77	0.201	5.11	0.032	0.81	6.1	316 SS CG P
0.300	7.62	61714S	0.630	15.88	0.236	6.00	15.000	2.63	0.222	5.63	3.330	14.80	0.217	5.51	0.032	0.81	6.5	316 SS CG P
0.300	7.62	61715S	0.690	17.48	0.236	6.00	13.300	2.33	0.250	6.35	3.325	14.78	0.241	6.12	0.032	0.81	7.1	316 SS CG P
0.300	7.62	61716S	0.750	19.05	0.236	6.00	12.500	2.19	0.266	6.76	3.325	14.78	0.249	6.32	0.032	0.81	7.5	316 SS CG P
0.300	7.62	61717S	0.810	20.65	0.236	6.00	11.200	1.96	0.297	7.54	3.326	14.78	0.265	6.73	0.032	0.81	8.1	316 SS CG P
0.300	7.62	61718S	0.880	22.23	0.236	6.00	10.000	1.75	0.333	8.45	3.330	14.80	0.289	7.34	0.032	0.81	8.8	316 SS CG P
0.300	7.62	61719S	0.940	23.83	0.236	6.00	9.200	1.61	0.362	9.18	3.330	14.80	0.313	7.95	0.032	0.81	9.4	316 SS CG P
0.300	7.62	61720S	1.000	25.40	0.236	6.00	8.300	1.45	0.401	10.17	3.328	14.79	0.337	8.56	0.032	0.81	10.2	316 SS CG P
0.300	7.62	61721S	1.250	31.75	0.236	6.00	7.200	1.26	0.462	11.73	3.326	14.78	0.383	9.73	0.032	0.81	11.5	316 SS CG P
0.300	7.62	61722S	1.500	38.10	0.236	6.00	5.800	1.02	0.574	14.56	3.329	14.80	0.450	11.43	0.032	0.81	13.7	316 SS CG P
0.300	7.62	61723S	1.750	44.45	0.236	6.00	5.000	0.88	0.666	16.89	3.330	14.80	0.518	13.16	0.032	0.81	15.6	316 SS CG P
0.300	7.62	61724S	2.000	50.80	0.236	6.00	4.400	0.77	0.756	19.18	3.326	14.78	0.572	14.53	0.032	0.81	17.5	316 SS CG P
0.300	7.62	61725S	2.250	57.15	0.236	6.00	3.900	0.68	0.853	21.66	3.327	14.79	0.635	16.13	0.032	0.81	19.5	316 SS CG P
0.300	7.62	61726S	2.500	63.50	0.236	6.00	3.400	0.60	0.979	24.86	3.329	14.80	0.700	17.78	0.032	0.81	22	316 SS CG P
0.300	7.62	61819S	0.380	9.53	0.230	5.84	38.200	6.69	0.115	2.92	4.393	19.52	0.167	4.24	0.035	0.89	4.6	316 SS CG P
0.300	7.62	61820S	0.440	11.13	0.230	5.84	31.700	5.55	0.138	3.51	4.375	19.44	0.187	4.75	0.035	0.89	5.2	316 SS CG P
0.300	7.62	61821S	0.500	12.70	0.230	5.84	27.100	4.75	0.162	4.11	4.390	19.51	0.206	5.23	0.035	0.89	5.7	316 SS CG P
0.300	7.62	61822S	0.560	14.30	0.230	5.84	23.700	4.15	0.185	4.70	4.385	19.49	0.226	5.74	0.035	0.89	6.3	316 SS CG P
0.300	7.62	61823S	0.630	15.88	0.230	5.84	21.000	3.68	0.209	5.30	4.389	19.51	0.245	6.22	0.035	0.89	6.8	316 SS CG P
0.300	7.62	61824S	0.690	17.48	0.230	5.84	18.900	3.31	0.232	5.89	4.385	19.49	0.265	6.73	0.035	0.89	7.3	316 SS CG P
0.300	7.62	61825S	0.750	19.05	0.230	5.84	17.100	3.00	0.257	6.51	4.395	19.53	0.284	7.21	0.035	0.89	7.9	316 SS CG P
0.300	7.62	61826S	0.810	20.65	0.230	5.84	15.700	2.75	0.280	7.09	4.396	19.54	0.304	7.72	0.035	0.89	8.4	316 SS CG P
0.300	7.62	61827S	0.880	22.23	0.230	5.84	14.500	2.54	0.303	7.68	4.394	19.53	0.323	8.20	0.035	0.89	9	316 SS CG P
0.300	7.62	61828S	0.940	23.83	0.230	5.84	13.400	2.35	0.328	8.31	4.395	19.53	0.343	8.71	0.035	0.89	9.5	316 SS CG P
0.300	7.62	61829S	1.000	25.40	0.230	5.84	12.500	2.19	0.351	8.91	4.388	19.50	0.362	9.19	0.035	0.89	10.1	316 SS CG P
0.300	7.62	61830S	1.130</															




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
mm		mm	mm																	
0.300	7.62	61915S	1.380	34.93	0.224	5.68	12.500	2.19	0.452	11.47	5.650	25.11	0.533	13.54	0.038	0.97	13.6	316 SS	CG	P
0.300	7.62	61916S	1.500	38.10	0.224	5.68	11.200	1.96	0.504	12.80	5.645	25.09	0.571	14.50	0.038	0.97	14.9	316 SS	CG	P
0.300	7.62	61917S	1.750	44.45	0.224	5.68	9.400	1.65	0.601	15.25	5.649	25.11	0.662	16.81	0.038	0.97	17.4	316 SS	CG	P
0.300	7.62	61918S	2.000	50.80	0.224	5.68	7.900	1.38	0.715	18.14	5.649	25.11	0.772	19.61	0.038	0.97	20.3	316 SS	CG	P
0.300	7.62	61919S	2.250	57.15	0.224	5.68	7.200	1.26	0.784	19.91	5.645	25.09	0.858	21.79	0.038	0.97	22.1	316 SS	CG	P
0.300	7.62	61920S	2.500	63.50	0.224	5.68	6.400	1.12	0.883	22.39	5.651	25.12	0.944	23.98	0.038	0.97	24.6	316 SS	CG	P
0.300	7.62	61970S	0.380	9.53	0.220	5.58	66.600	11.66	0.098	2.49	6.527	29.01	0.195	4.95	0.040	1.02	4.7	316 SS	CG	P
0.300	7.62	61971S	0.440	11.13	0.220	5.58	56.600	9.91	0.116	2.93	6.566	29.18	0.218	5.54	0.040	1.02	5.2	316 SS	CG	P
0.300	7.62	61972S	0.500	12.70	0.220	5.58	47.500	8.32	0.138	3.49	6.555	29.13	0.242	6.15	0.040	1.02	5.8	316 SS	CG	P
0.300	7.62	61973S	0.560	14.30	0.220	5.58	40.800	7.15	0.160	4.07	6.528	29.01	0.262	6.65	0.040	1.02	6.5	316 SS	CG	P
0.300	7.62	61974S	0.630	15.88	0.220	5.58	36.700	6.43	0.178	4.52	6.533	29.04	0.290	7.37	0.040	1.02	7	316 SS	CG	P
0.300	7.62	61975S	0.690	17.48	0.220	5.58	32.500	5.69	0.201	5.11	6.533	29.04	0.314	7.98	0.040	1.02	7.6	316 SS	CG	P
0.300	7.62	61976S	0.750	19.05	0.220	5.58	29.200	5.11	0.224	5.68	6.541	29.07	0.342	8.69	0.040	1.02	8.2	316 SS	CG	P
0.300	7.62	61977S	0.810	20.65	0.220	5.58	26.700	4.68	0.245	6.22	6.542	29.08	0.366	9.30	0.040	1.02	8.8	316 SS	CG	P
0.300	7.62	61978S	0.880	22.23	0.220	5.58	25.000	4.38	0.262	6.64	6.550	29.11	0.394	10.01	0.040	1.02	9.3	316 SS	CG	P
0.300	7.62	61979S	0.940	23.83	0.220	5.58	23.300	4.08	0.281	7.12	6.547	29.10	0.400	10.16	0.040	1.02	9.8	316 SS	CG	P
0.300	7.62	61980S	1.000	25.40	0.220	5.58	21.700	3.80	0.301	7.65	6.532	29.03	0.430	10.92	0.040	1.02	10.4	316 SS	CG	P
0.300	7.62	61981S	1.130	28.58	0.220	5.58	19.200	3.36	0.341	8.64	6.547	29.10	0.474	12.04	0.040	1.02	11.5	316 SS	CG	P
0.300	7.62	61982S	1.250	31.75	0.220	5.58	16.700	2.93	0.392	9.94	6.546	29.09	0.512	13.00	0.040	1.02	12.9	316 SS	CG	P
0.300	7.62	61983S	1.380	34.93	0.220	5.58	15.000	2.63	0.436	11.06	6.540	29.07	0.583	14.81	0.040	1.02	14.1	316 SS	CG	P
0.300	7.62	61984S	1.500	38.10	0.220	5.58	13.300	2.33	0.492	12.48	6.544	29.08	0.650	16.51	0.040	1.02	15.7	316 SS	CG	P
0.300	7.62	61985S	1.750	44.45	0.220	5.58	11.700	2.05	0.559	14.18	6.540	29.07	0.690	17.53	0.040	1.02	17.6	316 SS	CG	P
0.300	7.62	61986S	2.000	50.80	0.220	5.58	10.000	1.75	0.654	16.60	6.540	29.07	0.810	20.57	0.040	1.02	20.2	316 SS	CG	P
0.300	7.62	61987S	2.250	57.15	0.220	5.58	8.900	1.56	0.735	18.64	6.542	29.08	0.907	23.04	0.040	1.02	22.5	316 SS	CG	P
0.300	7.62	61988S	2.500	63.50	0.220	5.58	8.000	1.40	0.817	20.75	6.536	29.05	1.000	25.40	0.040	1.02	24.8	316 SS	CG	P
0.300	7.62	62026S	0.380	9.53	0.216	5.48	87.500	15.32	0.084	2.13	7.350	32.67	0.201	5.11	0.042	1.07	4.6	316 SS	CG	P
0.300	7.62	62027S	0.440	11.13	0.216	5.48	73.300	12.84	0.100	2.55	7.330	32.58	0.220	5.59	0.042	1.07	5.1	316 SS	CG	P
0.300	7.62	62028S	0.500	12.70	0.216	5.48	58.300	10.21	0.126	3.20	7.346	32.65	0.253	6.43	0.042	1.07	5.9	316 SS	CG	P
0.300	7.62	62029S	0.560	14.30	0.216	5.48	50.000	8.76	0.147	3.73	7.350	32.67	0.285	7.24	0.042	1.07	6.5	316 SS	CG	P
0.300	7.62	62030S	0.630	15.88	0.216	5.48	43.300	7.58	0.170	4.31	7.361	32.72	0.316	8.03	0.042	1.07	7.2	316 SS	CG	P
0.300	7.62	62031S	0.690	17.48	0.216	5.48	38.300	6.71	0.192	4.87	7.354	32.68	0.337	8.56	0.042	1.07	7.9	316 SS	CG	P
0.300	7.62	62032S	0.750	19.05	0.216	5.48	35.000	6.13	0.210	5.33	7.350	32.67	0.358	9.09	0.042	1.07	8.5	316 SS	CG	P
0.300	7.62	62033S	0.810	20.65	0.216	5.48	31.700	5.55	0.232	5.89	7.354	32.68	0.390	9.91	0.042	1.07	9.1	316 SS	CG	P
0.300	7.62	62034S	0.880	22.23	0.216	5.48	28.300	4.96	0.260	6.60	7.358	32.70	0.421	10.69	0.042	1.07	10	316 SS	CG	P
0.300	7.62	62035S	0.940	23.83	0.216	5.48	26.700	4.68	0.276	6.99	7.369	32.75	0.452	11.48	0.042	1.07	10.5	316 SS	CG	P
0.300	7.62	62036S	1.000	25.40	0.216	5.48	25.000	4.38	0.294	7.47	7.350	32.67	0.474	12.04	0.042	1.07	11.1	316 SS	CG	P
0.300	7.62	62037S	1.130	28.58	0.216	5.48	23.300	4.08	0.316	8.01	7.363	32.72	0.506	12.85	0.042	1.07	11.7	316 SS	CG	P
0.300	7.62	62038S	1.250	31.75	0.216	5.48	20.000	3.50	0.368	9.33	7.360	32.71	0.579	14.71	0.042	1.07	13.3	316 SS	CG	P
0.300	7.62	62039S	1.380	34.93	0.216	5.48	18.300	3.21	0.402	10.20	7.357	32.70	0.631	16.03	0.042	1.07	14.4	316 SS	CG	P
0.300	7.62	62040S	1.500	38.10	0.216	5.48	16.700	2.93	0.440	11.18	7.348	32.66	0.673	17.09	0.042	1.07	15.6	316 SS	CG	P
0.300	7.62	62041S	1.750	44.45	0.216	5.48	13.700	2.40	0.537	13.63	7.357	32.70	0.786	19.96	0.042	1.07	18.5	316 SS	CG	P
0.300	7.62	62042S	2.000	50.80	0.216	5.48	12.100	2.12	0.608	15.43	7.357	32.70	0.884	22.45	0.042	1.07	20.7	316 SS	CG	P
0.300	7.62	62043S	2.250	57.15	0.216	5.48	10.800	1.89	0.681	17.29	7.355	32.69	0.995	25.27	0.042	1.07	23	316 SS	CG	P
0.300	7.62	62044S	2.500	63.50	0.216	5.48	9.700	1.70	0.758	19.24	7.353	32.68	1.079	27.41	0.042	1.07	25.4	316 SS	CG	P
0.300	7.62	62107S	0.380	9.53	0.210	5.34	103.300	18.09	0.086	2.17	8.884	39.48	0.226	5.74	0.045	1.14	5	316 SS	CG	P
0.300	7.62	62108S	0.440	11.13	0.210	5.34	85.800	15.03	0.103	2.61	8.837	39.28	0.260	6.60	0.045	1.14	5.6	316 SS	CG	P
0.300	7.62	62109S	0.500	12.70	0.210	5.34	75.000	13.14	0.118	2.99	8.850	39.33	0.271	6.88	0.045	1.14	6.1	316 SS	CG	P
0.300	7.62	62110S	0.560	14.30	0.210	5.34	64.100	11.23	0.138	3.50	8.846	39.32	0.316	8.03	0.045	1.14	6.8	316 SS	CG	P
0.300	7.62	62111S	0.630	15.88	0.210	5.34	57.500	10.07	0.154	3.90	8.855	39.36	0.339	8.61	0.045	1.14	7.4	316 SS	CG	P
0.300	7.62	62112S	0.690	17.48	0.210	5.34	50.800	8.90	0.174	4.41	8.839	39.28	0.372	9.45	0.045	1.14	8.1	316 SS	CG	P
0.300	7.62	62113S	0.750	19.05	0.210	5.34	45.800	8.02	0.193	4.90	8.839	39.28	0.406	10.31	0.045	1.14	8.8	316 SS	CG	P
0.300	7.62	62114S	0.810	20.65	0.210	5.34	42.500	7.44	0.208	5.28	8.840	39.29	0.417	10.59	0.045	1.14	9.3	316 SS	CG	P
0.300	7.62	62115S	0.880	22.23	0.210	5.34	38.300	6.71	0.231	5.85	8.847	39.32	0.451	11.46	0.045</					




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm		Wire Dia. Inches mm		Total Coils	E Mat'l	F Ends	s h	
0.300	7.62	62168S	1.250	31.75	0.206	5.24	32.800	5.74	0.305	7.74	10.004	44.46	0.653	16.59	0.047	1.19	13.5	316 SS CG P
0.300	7.62	62169S	1.380	34.93	0.206	5.24	29.600	5.18	0.338	8.58	10.005	44.47	0.713	18.11	0.047	1.19	14.7	316 SS CG P
0.300	7.62	62170S	1.500	38.10	0.206	5.24	27.000	4.73	0.370	9.40	9.990	44.40	0.773	19.63	0.047	1.19	16	316 SS CG P
0.300	7.62	62171S	1.750	44.45	0.206	5.24	22.900	4.01	0.437	11.08	10.007	44.48	0.893	22.68	0.047	1.19	18.5	316 SS CG P
0.300	7.62	62172S	2.000	50.80	0.206	5.24	19.900	3.49	0.503	12.76	10.010	44.49	1.013	25.73	0.047	1.19	20.9	316 SS CG P
0.300	7.62	62173S	2.250	57.15	0.206	5.24	17.600	3.08	0.568	14.42	9.997	44.43	1.134	28.80	0.047	1.19	23.4	316 SS CG P
0.300	7.62	62174S	2.500	63.50	0.206	5.24	15.800	2.77	0.633	16.07	10.001	44.45	1.254	31.85	0.047	1.19	25.8	316 SS CG P
0.300	7.62	62175S	2.750	69.85	0.206	5.24	14.250	2.50	0.702	17.81	10.004	44.46	1.376	34.95	0.047	1.19	28.4	316 SS CG P
0.300	7.62	62176S	3.000	76.20	0.206	5.24	13.080	2.29	0.765	19.41	10.008	44.48	1.490	37.85	0.047	1.19	30.8	316 SS CG P
0.300	7.62	62244S	0.380	9.53	0.200	5.08	161.100	28.21	0.073	1.86	11.760	52.27	0.255	6.48	0.050	1.27	5.1	316 SS CG P
0.300	7.62	62245S	0.440	11.13	0.200	5.08	131.300	23.00	0.090	2.28	11.817	52.52	0.291	7.39	0.050	1.27	5.8	316 SS CG P
0.300	7.62	62246S	0.500	12.70	0.200	5.08	111.000	19.44	0.106	2.70	11.766	52.29	0.325	8.26	0.050	1.27	6.5	316 SS CG P
0.300	7.62	62247S	0.560	14.30	0.200	5.08	96.100	16.83	0.123	3.12	11.820	52.53	0.360	9.14	0.050	1.27	7.2	316 SS CG P
0.300	7.62	62248S	0.630	15.88	0.200	5.08	84.600	14.82	0.140	3.54	11.844	52.64	0.396	10.06	0.050	1.27	7.9	316 SS CG P
0.300	7.62	62249S	0.690	17.48	0.200	5.08	75.800	13.28	0.156	3.95	11.825	52.56	0.430	10.92	0.050	1.27	8.6	316 SS CG P
0.300	7.62	62250S	0.750	19.05	0.200	5.08	68.500	12.00	0.172	4.37	11.782	52.36	0.465	11.81	0.050	1.27	9.3	316 SS CG P
0.300	7.62	62251S	0.810	20.65	0.200	5.08	62.500	10.95	0.189	4.79	11.813	52.50	0.500	12.70	0.050	1.27	10	316 SS CG P
0.300	7.62	62252S	0.880	22.23	0.200	5.08	57.500	10.07	0.205	5.21	11.788	52.39	0.535	13.59	0.050	1.27	10.7	316 SS CG P
0.300	7.62	62253S	0.940	23.83	0.200	5.08	53.200	9.32	0.222	5.63	11.810	52.49	0.570	14.48	0.050	1.27	11.4	316 SS CG P
0.300	7.62	62254S	1.000	25.40	0.200	5.08	49.500	8.67	0.239	6.05	11.831	52.58	0.605	15.37	0.050	1.27	12.1	316 SS CG P
0.300	7.62	62255S	1.130	28.58	0.200	5.08	43.500	7.62	0.271	6.89	11.789	52.40	0.675	17.15	0.050	1.27	13.5	316 SS CG P
0.300	7.62	62256S	1.250	31.75	0.200	5.08	38.800	6.80	0.304	7.72	11.795	52.42	0.745	18.92	0.050	1.27	14.9	316 SS CG P
0.300	7.62	62257S	1.380	34.93	0.200	5.08	35.000	6.13	0.337	8.56	11.795	52.42	0.815	20.70	0.050	1.27	16.3	316 SS CG P
0.300	7.62	62258S	1.500	38.10	0.200	5.08	31.800	5.57	0.371	9.42	11.798	52.44	0.886	22.50	0.050	1.27	17.7	316 SS CG P
0.300	7.62	62259S	1.750	44.45	0.200	5.08	27.000	4.73	0.437	11.10	11.799	52.44	1.026	26.06	0.050	1.27	20.5	316 SS CG P
0.300	7.62	62260S	2.000	50.80	0.200	5.08	23.500	4.12	0.502	12.75	11.797	52.43	1.164	29.57	0.050	1.27	23.3	316 SS CG P
0.300	7.62	62261S	2.250	57.15	0.200	5.08	20.700	3.63	0.570	14.48	11.799	52.44	1.308	33.22	0.050	1.27	26.2	316 SS CG P
0.300	7.62	62262S	2.500	63.50	0.200	5.08	18.600	3.26	0.635	16.11	11.811	52.49	1.444	36.68	0.050	1.27	28.9	316 SS CG P
0.300	7.62	62263S	2.750	69.85	0.200	5.08	16.830	2.95	0.701	17.80	11.800	52.44	1.585	40.26	0.050	1.27	31.7	316 SS CG P
0.300	7.62	62264S	3.000	76.20	0.200	5.08	15.330	2.69	0.770	19.54	11.806	52.47	1.731	43.97	0.050	1.27	34.6	316 SS CG P
0.300	7.62	62265S	0.380	9.53	0.198	5.02	191.500	33.54	0.066	1.67	12.639	56.17	0.255	6.48	0.051	1.30	4.9	316 SS CG P
0.300	7.62	62267S	0.440	11.13	0.198	5.02	155.600	27.25	0.081	2.06	12.604	56.02	0.290	7.37	0.051	1.30	5.5	316 SS CG P
0.300	7.62	62268S	0.500	12.70	0.198	5.02	131.400	23.01	0.096	2.44	12.614	56.06	0.324	8.23	0.051	1.30	6.2	316 SS CG P
0.300	7.62	62269S	0.560	14.30	0.198	5.02	113.700	19.91	0.111	2.82	12.621	56.09	0.358	9.09	0.051	1.30	6.8	316 SS CG P
0.300	7.62	62270S	0.630	15.88	0.198	5.02	100.000	17.51	0.126	3.21	12.600	56.00	0.393	9.98	0.051	1.30	7.5	316 SS CG P
0.300	7.62	62291S	0.690	17.48	0.198	5.02	89.400	15.66	0.141	3.59	12.605	56.02	0.427	10.85	0.051	1.30	8.1	316 SS CG P
0.300	7.62	62292S	0.750	19.05	0.198	5.02	80.700	14.13	0.157	3.97	12.670	56.31	0.461	11.71	0.051	1.30	8.8	316 SS CG P
0.300	7.62	62293S	0.810	20.65	0.198	5.02	73.700	12.91	0.171	4.35	12.603	56.01	0.496	12.60	0.051	1.30	9.4	316 SS CG P
0.300	7.62	62294S	0.880	22.23	0.198	5.02	67.600	11.84	0.187	4.74	12.641	56.18	0.530	13.46	0.051	1.30	10.1	316 SS CG P
0.300	7.62	62295S	0.940	23.83	0.198	5.02	62.600	10.96	0.202	5.12	12.645	56.20	0.564	14.33	0.051	1.30	10.8	316 SS CG P
0.300	7.62	62296S	1.000	25.40	0.198	5.02	58.200	10.19	0.217	5.51	12.629	56.13	0.599	15.21	0.051	1.30	11.4	316 SS CG P
0.300	7.62	62297S	1.130	28.58	0.198	5.02	51.100	8.95	0.247	6.27	12.622	56.10	0.668	16.97	0.051	1.30	12.7	316 SS CG P
0.300	7.62	62298S	1.250	31.75	0.198	5.02	45.500	7.97	0.278	7.04	12.649	56.22	0.737	18.72	0.051	1.30	14	316 SS CG P
0.300	7.62	62299S	1.380	34.93	0.198	5.02	41.100	7.20	0.307	7.80	12.618	56.08	0.805	20.45	0.051	1.30	15.3	316 SS CG P
0.300	7.62	62300S	1.500	38.10	0.198	5.02	37.400	6.55	0.338	8.57	12.641	56.18	0.874	22.20	0.051	1.30	16.7	316 SS CG P
0.300	7.62	62301S	1.750	44.45	0.198	5.02	31.700	5.55	0.398	10.11	12.617	56.08	1.011	25.68	0.051	1.30	19.3	316 SS CG P
0.300	7.62	62302S	2.000	50.80	0.198	5.02	27.600	4.83	0.458	11.61	12.641	56.18	1.149	29.18	0.051	1.30	21.9	316 SS CG P
0.300	7.62	62303S	2.250	57.15	0.198	5.02	24.300	4.26	0.520	13.19	12.636	56.16	1.287	32.69	0.051	1.30	24.5	316 SS CG P
0.300	7.62	62304S	2.500	63.50	0.198	5.02	21.800	3.82	0.579	14.70	12.622	56.10	1.424	36.17	0.051	1.30	27.1	316 SS CG P
0.312	7.93	64043S	0.660	16.76	0.230	5.84	39.439	6.90	0.170	4.32	6.705	29.82	0.267	6.78	0.041	1.04	6.5	316 SS CG P
0.312	7.93	64046S	1.000	25.40	0.232	5.89	14.456	2.53	0.431	10.95	6.231	27.72	0.520	13.21	0.040	1.02	13	316 SS CG P
0.312	7.93	64048S	1.250	31.75	0.230	5.84	14.790	2.59	0.453	11.51	6.700	29.80	0.615	15.62	0.041	1.04	14	316 SS C P
0.312	7.93	64049S	1.250	31.75	0.217	5.51	22.925	4.01	0.429	10.90	9.835	43.75	0.808	20.52	0.048	1.21	17	316 SS CG P
0.312	7.93	64050S	1.500	38.10	0.196	4.98	82.211	14.39	0.207	5.26	17.018	75.70	0.725	18.42	0.058	1.47	12.5	316 SS C P
0.312	7.93	64051S	1.500	38.10	0.244	6.20	5.846	1.02	0.663	16.84	3.876	17.24	0.554	14.07	0.03			




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg Max. Defl. Inches	Sugg Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish								
mm		mm	mm	N/mm	mm	N	mm	mm			C	P								
0.312	7.93	67362S	0.560	14.22	0.272	6.91	4.017	0.70	0.201	5.11	0.807	3.59	0.100	2.54	0.020	0.51	4	316 SS	C	P
0.312	7.93	67363S	0.560	14.22	0.264	6.71	5.787	1.01	0.239	6.07	1.383	6.15	0.144	3.66	0.024	0.61	5	316 SS	C	P
0.312	7.93	67364S	0.560	14.22	0.262	6.66	8.262	1.45	0.189	4.80	1.562	6.95	0.113	2.87	0.025	0.64	4.5	316 SS	CG	P
0.312	7.93	67365S	0.560	14.22	0.262	6.66	5.164	0.90	0.303	7.70	1.565	6.96	0.175	4.45	0.025	0.64	6	316 SS	C	P
0.312	7.93	67366S	0.560	14.22	0.252	6.40	10.033	1.76	0.267	6.78	2.679	11.92	0.195	4.95	0.030	0.76	6.5	316 SS	CG	P
0.312	7.93	67367S	0.630	16.00	0.260	6.60	6.104	1.07	0.288	7.32	1.758	7.82	0.182	4.62	0.026	0.66	6	316 SS	C	P
0.312	7.93	67368S	0.630	16.00	0.264	6.71	4.630	0.81	0.299	7.60	1.384	6.16	0.162	4.12	0.024	0.61	5.8	316 SS	C	P
0.312	7.93	67369S	0.630	16.00	0.256	6.50	9.583	1.68	0.228	5.79	2.185	9.72	0.182	4.62	0.028	0.71	5.5	316 SS	C	P
0.312	7.93	67370S	0.660	16.76	0.272	6.91	2.008	0.35	0.401	10.19	0.805	3.58	0.140	3.56	0.020	0.51	6	316 SS	C	P
0.312	7.93	67371S	0.660	16.76	0.272	6.91	2.008	0.35	0.401	10.19	0.805	3.58	0.140	3.56	0.020	0.51	6	316 SS	C	P
0.312	7.93	67372S	0.690	17.53	0.254	6.45	6.501	1.14	0.373	9.47	2.425	10.79	0.261	6.63	0.029	0.74	8	316 SS	C	P
0.312	7.93	67373S	0.690	17.53	0.256	6.50	6.708	1.17	0.326	8.28	2.187	9.73	0.224	5.69	0.028	0.71	7	316 SS	C	P
0.312	7.93	67374S	0.750	19.05	0.264	6.71	3.858	0.68	0.359	9.12	1.385	6.16	0.180	4.57	0.024	0.61	6.5	316 SS	C	P
0.312	7.93	67375S	0.750	19.05	0.236	5.99	19.493	3.41	0.275	6.99	5.361	23.85	0.323	8.20	0.038	0.97	8.5	316 SS	CG	P
0.312	7.93	67376S	0.750	19.05	0.248	6.30	8.530	1.49	0.380	9.65	3.241	14.42	0.288	7.32	0.032	0.81	9	316 SS	CG	P
0.312	7.93	67377S	0.750	19.05	0.256	6.50	6.708	1.17	0.326	8.28	2.187	9.73	0.224	5.69	0.028	0.71	7	316 SS	C	P
0.312	7.93	67378S	0.750	19.05	0.282	7.16	0.302	0.05	0.585	14.86	0.177	0.79	0.165	4.19	0.015	0.38	10	316 SS	C	P
0.312	7.93	67379S	0.750	19.05	0.248	6.30	11.373	1.99	0.285	7.24	3.241	14.42	0.264	6.71	0.032	0.81	7.3	316 SS	C	P
0.312	7.93	67380S	0.750	19.05	0.272	6.91	1.339	0.23	0.570	14.48	0.763	3.39	0.180	4.57	0.020	0.51	8	316 SS	C	P
0.312	7.93	67381S	0.750	19.05	0.272	6.91	0.402	0.07	0.310	7.87	0.125	0.56	0.440	11.18	0.020	0.51	22	316 SS	CG	P
0.312	7.93	67382S	0.750	19.05	0.264	6.71	3.472	0.61	0.399	10.14	1.385	6.16	0.192	4.88	0.024	0.61	7	316 SS	C	P
0.312	7.93	67383S	0.750	19.05	0.268	6.81	3.002	0.53	0.356	9.04	1.069	4.76	0.154	3.91	0.022	0.56	6	316 SS	C	P
0.312	7.93	67384S	0.750	19.05	0.262	6.66	3.442	0.60	0.454	11.53	1.563	6.95	0.225	5.72	0.025	0.64	8	316 SS	C	P
0.312	7.93	67385S	0.780	19.81	0.252	6.40	7.525	1.32	0.356	9.04	2.679	11.92	0.240	6.10	0.030	0.76	8	316 SS	CG	P
0.312	7.93	67386S	0.780	19.81	0.252	6.40	7.525	1.32	0.356	9.04	2.679	11.92	0.240	6.10	0.030	0.76	8	316 SS	CG	P
0.312	7.93	67387S	0.840	21.34	0.210	5.33	70.464	12.33	0.171	4.34	12.049	53.59	0.446	11.33	0.051	1.30	8.8	316 SS	CG	P
0.312	7.93	67388S	0.880	22.35	0.270	6.86	1.233	0.22	0.649	16.49	0.800	3.56	0.231	5.87	0.021	0.53	10	316 SS	C	P
0.312	7.93	67389S	0.880	22.35	0.272	6.91	1.607	0.28	0.502	12.75	0.807	3.59	0.160	4.06	0.020	0.51	7	316 SS	C	P
0.312	7.93	67390S	0.880	22.35	0.272	6.91	1.148	0.20	0.680	17.27	0.781	3.47	0.200	5.08	0.020	0.51	9	316 SS	C	P
0.312	7.93	67391S	0.880	22.35	0.252	6.40	7.525	1.32	0.356	9.04	2.679	11.92	0.240	6.10	0.030	0.76	8	316 SS	CG	P
0.312	7.93	67392S	0.880	22.35	0.272	6.91	1.691	0.30	0.477	12.12	0.807	3.59	0.155	3.94	0.020	0.51	6.8	316 SS	C	P
0.312	7.93	67393S	0.940	23.88	0.278	7.06	0.407	0.07	0.719	18.26	0.293	1.30	0.221	5.61	0.017	0.43	12	316 SS	C	P
0.312	7.93	67394S	1.000	25.40	0.272	6.91	1.785	0.31	0.452	11.48	0.807	3.59	0.150	3.81	0.020	0.51	6.5	316 SS	C	P
0.312	7.93	67395S	1.000	25.40	0.280	7.11	0.842	0.15	0.493	12.52	0.415	1.85	0.108	2.74	0.016	0.41	5.8	316 SS	C	P
0.312	7.93	67396S	1.000	25.40	0.284	7.21	0.330	0.06	0.864	21.95	0.285	1.27	0.119	3.02	0.014	0.36	7.5	316 SS	C	P
0.312	7.93	67397S	1.000	25.40	0.284	7.21	0.302	0.05	0.874	22.20	0.264	1.17	0.126	3.20	0.014	0.36	8	316 SS	C	P
0.312	7.93	67398S	1.000	25.40	0.278	7.06	0.581	0.10	0.830	21.08	0.482	2.14	0.170	4.32	0.017	0.43	9	316 SS	C	P
0.312	7.93	67399S	1.060	26.92	0.252	6.40	6.020	1.05	0.445	11.30	2.679	11.92	0.315	8.00	0.030	0.76	9.5	316 SS	C	P
0.312	7.93	67400S	1.060	26.92	0.254	6.45	5.572	0.98	0.435	11.05	2.424	10.78	0.290	7.37	0.029	0.74	9	316 SS	C	P
0.312	7.93	67401S	1.060	26.92	0.284	7.21	0.302	0.05	0.934	23.72	0.282	1.25	0.126	3.20	0.014	0.36	8	316 SS	C	P
0.312	7.93	67402S	1.130	28.70	0.272	6.91	1.037	0.18	0.777	19.74	0.806	3.59	0.215	5.46	0.020	0.51	9.8	316 SS	C	P
0.312	7.93	67403S	1.130	28.70	0.272	6.91	1.148	0.20	0.702	17.83	0.806	3.59	0.200	5.08	0.020	0.51	9	316 SS	C	P
0.312	7.93	67404S	1.130	28.70	0.256	6.50	2.917	0.51	0.724	18.39	2.112	9.39	0.406	10.31	0.028	0.71	13.5	316 SS	C	P
0.312	7.93	67405S	1.130	28.70	0.252	6.40	6.020	1.05	0.445	11.30	2.679	11.92	0.315	8.00	0.030	0.76	9.5	316 SS	C	P
0.312	7.93	67406S	1.130	28.70	0.256	6.50	4.193	0.73	0.521	13.23	2.185	9.72	0.308	7.82	0.028	0.71	10	316 SS	C	P
0.312	7.93	67407S	1.130	28.70	0.272	6.91	1.339	0.23	0.602	15.29	0.806	3.59	0.160	4.06	0.020	0.51	8	316 SS	CG	P
0.312	7.93	67408S	1.220	30.99	0.192	4.88	126.539	22.14	0.148	3.76	18.728	83.30	0.660	16.76	0.060	1.52	10	316 SS	C	P
0.312	7.93	67409S	1.220	30.99	0.260	6.60	2.492	0.44	0.704	17.88	1.754	7.80	0.307	7.80	0.026	0.66	11.8	316 SS	CG	P
0.312	7.93	67410S	1.250	31.75	0.264	6.71	2.480	0.43	0.558	14.17	1.384	6.16	0.240	6.10	0.024	0.61	9	316 SS	C	P
0.312	7.93	67411S	1.250	31.75	0.252	6.40	3.762	0.66	0.712	18.09	2.679	11.92	0.450	11.43	0.030	0.76	14	316 SS	C	P
0.312	7.93	67412S	1.250	31.75	0.260	6.60	1.878	0.33	0.834	21.18	1.566	6.97	0.416	10.57	0.026	0.66	15	316 SS	C	P
0.312	7.93	67413S	1.310	33.27	0.256	6.50	3.049	0.53	0.716	18.19	2.183	9.71	0.392	9.96	0.028	0.71	13	316 SS	C	P
0.312	7.93	67414S	1.310	33.27	0.256	6.50	3.049	0.53	0.717	18.21	2.186	9.72	0.392	9.96	0.028	0.71	13	316 SS	C	P
0.312	7.93	67415S	1.310	33.27	0.250	6.35	3.153	0.55	0.705	17.91	2.223	9.89	0.605	15.37	0.031	0.79</				




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm		Wire Dia. Inches mm		Total Coils	Mat'l	E n d s	F in sh	
0.312	7.93	67437S	1.750	44.45	0.260	6.60	2.442	0.43	0.719	18.26	1.756	7.81	0.338	8.59	0.026	0.66	12	316 SS C P
0.312	7.93	67438S	1.750	44.45	0.272	6.91	0.846	0.15	0.953	24.21	0.806	3.59	0.250	6.35	0.020	0.51	11.5	316 SS C P
0.312	7.93	67439S	1.780	45.21	0.248	6.30	5.284	0.93	0.614	15.60	3.244	14.43	0.458	11.63	0.032	0.81	13.3	316 SS C P
0.312	7.93	67440S	1.940	49.28	0.260	6.60	1.744	0.31	1.006	25.55	1.754	7.80	0.442	11.23	0.026	0.66	16	316 SS C P
0.312	7.93	67441S	2.310	58.67	0.256	6.50	1.677	0.29	1.302	33.07	2.183	9.71	0.644	16.36	0.028	0.71	22	316 SS C P
0.312	7.93	67442S	2.500	63.50	0.250	6.35	2.601	0.46	1.135	28.83	2.952	13.13	0.713	18.11	0.031	0.79	22	316 SS C P
0.312	7.93	68344S	0.310	7.87	0.248	6.30	39.806	6.97	0.081	2.06	3.224	14.34	0.144	3.66	0.032	0.81	3.5	316 SS C P
0.312	7.93	68346S	0.380	9.65	0.228	5.79	65.871	11.53	0.107	2.72	7.048	31.35	0.252	6.40	0.042	1.07	5	316 SS C P
0.312	7.93	68347S	0.380	9.65	0.226	5.74	87.819	15.37	0.086	2.18	7.552	33.59	0.194	4.93	0.043	1.09	4.5	316 SS CG P
0.312	7.93	68348S	0.380	9.65	0.217	5.51	85.970	15.05	0.095	2.41	8.167	36.33	0.285	7.24	0.048	1.21	6	316 SS CG P
0.312	7.93	68349S	0.380	9.65	0.242	6.15	44.128	7.72	0.095	2.41	4.192	18.65	0.140	3.56	0.035	0.89	4	316 SS CG P
0.312	7.93	68351S	0.440	11.18	0.244	6.20	25.916	4.54	0.149	3.79	3.861	17.17	0.170	4.32	0.034	0.86	5	316 SS CG P
0.312	7.93	68352S	0.440	11.18	0.230	5.84	70.990	12.42	0.094	2.39	6.673	29.68	0.185	4.70	0.041	1.04	4.5	316 SS CG P
0.312	7.93	68353S	0.440	11.18	0.212	5.39	144.799	25.34	0.079	2.01	11.439	50.88	0.250	6.35	0.050	1.27	5	316 SS CG P
0.312	7.93	68354S	0.470	11.94	0.236	5.99	42.235	7.39	0.127	3.23	5.364	23.86	0.228	5.79	0.038	0.97	5	316 SS C P
0.312	7.93	68355S	0.500	12.70	0.248	6.30	14.927	2.61	0.217	5.51	3.239	14.41	0.224	5.69	0.032	0.81	6	316 SS CG P
0.312	7.93	68356S	0.500	12.70	0.230	5.84	44.369	7.77	0.151	3.84	6.700	29.80	0.246	6.25	0.041	1.04	6	316 SS CG P
0.312	7.93	68357S	0.500	12.70	0.192	4.88	253.077	44.29	0.074	1.88	18.728	83.30	0.360	9.14	0.060	1.52	6	316 SS CG P
0.312	7.93	68358S	0.530	13.46	0.232	5.89	45.433	7.95	0.137	3.48	6.224	27.68	0.260	6.60	0.040	1.02	5.5	316 SS C P
0.312	7.93	68359S	0.560	14.22	0.204	5.18	206.303	36.10	0.069	1.75	14.235	63.32	0.270	6.86	0.054	1.37	5	316 SS CG P
0.312	7.93	68360S	0.590	14.99	0.222	5.64	59.843	10.47	0.144	3.66	8.617	38.33	0.338	8.59	0.045	1.14	6.5	316 SS C P
0.312	7.93	68361S	0.630	16.00	0.230	5.84	35.495	6.21	0.189	4.80	6.709	29.84	0.287	7.29	0.041	1.04	7	316 SS CG P
0.312	7.93	68362S	0.630	16.00	0.244	6.20	25.916	4.54	0.149	3.79	3.861	17.17	0.204	5.18	0.034	0.86	5	316 SS C P
0.312	7.93	68363S	0.630	16.00	0.244	6.20	25.916	4.54	0.149	3.79	3.861	17.17	0.204	5.18	0.034	0.86	5	316 SS C P
0.312	7.93	68364S	0.690	17.53	0.236	5.99	21.117	3.70	0.254	6.45	5.364	23.86	0.304	7.72	0.038	0.97	8	316 SS CG P
0.312	7.93	68366S	0.690	17.53	0.226	5.74	46.220	8.09	0.163	4.14	7.534	33.51	0.290	7.37	0.043	1.09	6.8	316 SS CG P
0.312	7.93	68367S	0.690	17.53	0.222	5.64	41.430	7.25	0.207	5.26	8.576	38.15	0.383	9.73	0.045	1.14	8.5	316 SS CG P
0.312	7.93	68368S	0.690	17.53	0.242	6.15	16.046	2.81	0.263	6.68	4.220	18.77	0.298	7.57	0.035	0.89	7.5	316 SS C P
0.312	7.93	68369S	0.690	17.53	0.232	5.89	35.337	6.18	0.176	4.47	6.219	27.66	0.260	6.60	0.040	1.02	6.5	316 SS CG P
0.312	7.93	68370S	0.690	17.53	0.217	5.51	52.905	9.26	0.186	4.72	9.840	43.77	0.404	10.26	0.048	1.21	8.5	316 SS CG P
0.312	7.93	68371S	0.720	18.29	0.240	6.10	13.315	2.33	0.342	8.69	4.554	20.26	0.378	9.60	0.036	0.91	9.5	316 SS C P
0.312	7.93	68372S	0.750	19.05	0.244	6.20	8.639	1.51	0.376	9.55	3.248	14.45	0.374	9.50	0.034	0.86	11	316 SS CG P
0.312	7.93	68373S	0.750	19.05	0.228	5.79	30.402	5.32	0.231	5.87	7.023	31.24	0.357	9.07	0.042	1.07	8.5	316 SS CG P
0.312	7.93	68374S	0.750	19.05	0.217	5.51	57.313	10.03	0.172	4.37	9.858	43.85	0.380	9.65	0.048	1.21	8	316 SS CG P
0.312	7.93	68375S	0.750	19.05	0.222	5.64	44.882	7.85	0.191	4.85	8.572	38.13	0.360	9.14	0.045	1.14	8	316 SS CG P
0.312	7.93	68376S	0.750	19.05	0.210	5.33	118.907	20.81	0.101	2.57	12.010	53.42	0.306	7.77	0.051	1.30	6	316 SS CG P
0.312	7.93	68377S	0.750	19.05	0.244	6.20	12.958	2.27	0.299	7.60	3.874	17.23	0.306	7.77	0.034	0.86	8	316 SS C P
0.312	7.93	68378S	0.810	20.57	0.240	6.10	11.096	1.94	0.413	10.49	4.583	20.39	0.396	10.06	0.036	0.91	11	316 SS CG P
0.312	7.93	68379S	0.810	20.57	0.222	5.64	48.963	8.57	0.175	4.45	8.569	38.12	0.338	8.59	0.045	1.14	7.5	316 SS CG P
0.312	7.93	68380S	0.810	20.57	0.240	6.10	14.266	2.50	0.321	8.15	4.579	20.37	0.324	8.23	0.036	0.91	9	316 SS CG P
0.312	7.93	68381S	0.840	21.34	0.232	5.89	15.902	2.78	0.360	9.14	5.725	25.47	0.480	12.19	0.040	1.02	12	316 SS CG P
0.312	7.93	68382S	0.910	23.11	0.230	5.84	22.184	3.88	0.302	7.67	6.700	29.80	0.410	10.41	0.041	1.04	10	316 SS CG P
0.312	7.93	68383S	0.910	23.11	0.212	5.39	48.266	8.45	0.236	5.99	11.391	50.67	0.600	15.24	0.050	1.27	11	316 SS C P
0.312	7.93	68384S	0.940	23.88	0.230	5.84	14.198	2.49	0.304	7.72	4.316	19.20	0.636	16.15	0.041	1.04	14.5	316 SS C P
0.312	7.93	68385S	1.000	25.40	0.242	6.15	12.608	2.21	0.334	8.48	4.211	18.73	0.350	8.89	0.035	0.89	9	316 SS C P
0.312	7.93	68386S	1.000	25.40	0.226	5.74	19.091	3.34	0.376	9.55	7.178	31.93	0.624	15.85	0.043	1.09	13.5	316 SS C P
0.312	7.93	68387S	1.000	25.40	0.248	6.30	5.428	0.95	0.584	14.83	3.170	14.10	0.416	10.57	0.032	0.81	13	316 SS CG P
0.312	7.93	68389S	1.060	26.92	0.210	5.33	67.947	11.89	0.178	4.52	12.095	53.80	0.459	11.66	0.051	1.30	9	316 SS CG P
0.312	7.93	68390S	1.130	28.70	0.236	5.99	11.519	2.02	0.465	11.81	5.356	23.82	0.494	12.55	0.038	0.97	13	316 SS CG P
0.312	7.93	68391S	1.190	30.23	0.230	5.84	25.354	4.44	0.264	6.71	6.693	29.77	0.369	9.37	0.041	1.04	9	316 SS CG P
0.312	7.93	68392S	1.190	30.23	0.222	5.64	21.544	3.77	0.398	10.11	8.575	38.14	0.653	16.59	0.045	1.14	14.5	316 SS CG P
0.312	7.93	68393S	1.220	30.99	0.196	4.98	95.913	16.79	0.178	4.52	17.073	75.94	0.696	17.68	0.058	1.47	11	316 SS C P
0.312	7.93	68394S	1.250	31.75	0.196	4.98	107.902	18.88	0.158	4.01	17.049	75.83	0.638	16.21	0.058	1.47	10	316 SS C P
0.312	7.93	68395S	1.250	31.75	0.244	6.20	5.981	1.05	0.647	16.43	3.870	17.21	0.510	12.95	0.034	0.86	15	316 SS CG P
0.312	7.93	68396S	1.310	33.27	0.244	6.20	6.479	1.13	0.597	15.16	3.868	17.21	0.510	12.95	0.034	0.86	14	316 SS C P
0.312	7.93	68397S	1.310	33.27	0.248	6.30	4.265	0.75	0.760	19.30</td								




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg Max. Defl. Inches	Sugg Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish								
mm		mm	mm	N/mm	mm	N	mm	mm												
0.312	7.93	68418S	1.880	47.75	0.230	5.84	9.860	1.73	0.679	17.25	6.695	29.78	0.861	21.87	0.041	1.04	20	316 SS	C	P
0.312	7.93	68419S	1.880	47.75	0.242	6.15	4.413	0.77	0.955	24.26	4.214	18.74	0.805	20.45	0.035	0.89	22	316 SS	C	P
0.312	7.93	68420S	1.940	49.28	0.232	5.89	8.934	1.56	0.697	17.70	6.227	27.70	0.832	21.13	0.040	1.02	19.8	316 SS	C	P
0.312	7.93	68421S	2.000	50.80	0.212	5.39	27.150	4.75	0.420	10.67	11.403	50.72	0.950	24.13	0.050	1.27	18	316 SS	C	P
0.312	7.93	68422S	2.130	54.10	0.232	5.89	8.834	1.55	0.705	17.91	6.228	27.70	0.840	21.34	0.040	1.02	20	316 SS	C	P
0.312	7.93	68423S	2.250	57.15	0.228	5.79	11.292	1.98	0.622	15.80	7.024	31.24	0.819	20.80	0.042	1.07	19.5	316 SS	CG	P
0.312	7.93	68424S	2.340	59.44	0.217	5.51	18.099	3.17	0.543	13.79	9.828	43.72	0.998	25.35	0.048	1.21	21	316 SS	CG	P
0.312	7.93	68425S	2.500	63.50	0.210	5.33	19.025	3.33	0.634	16.10	12.062	53.65	1.377	34.98	0.051	1.30	27	316 SS	CG	P
0.312	7.93	64047S	1.190	30.23	0.168	4.27	243.000	42.53	0.125	3.18	30.375	135.11	0.864	21.95	0.072	1.83	12	316 SS	CG	P
0.312	7.93	68416S	1.750	44.45	0.178	4.52	118.125	20.67	0.212	5.39	25.043	111.39	1.173	29.79	0.067	1.70	16.5	316 SS	C	P
0.312	7.93	64044S	0.780	19.81	0.187	4.75	158.459	27.73	0.130	3.30	20.600	91.63	0.609	15.47	0.063	1.59	9.8	316 SS	CG	P
0.312	7.93	64045S	1.000	25.40	0.187	4.75	223.283	39.08	0.092	2.34	20.542	91.37	0.469	11.91	0.063	1.59	7.5	316 SS	CG	P
0.312	7.92	60955S	0.250	6.35	0.280	7.10	2.360	0.41	0.181	4.58	0.428	1.90	0.055	1.39	0.016	0.41	3.3	316 SS	CG	P
0.312	7.92	60956S	0.310	7.95	0.280	7.10	1.840	0.32	0.232	5.89	0.427	1.90	0.061	1.55	0.016	0.41	3.7	316 SS	CG	P
0.312	7.92	60957S	0.380	9.53	0.280	7.10	1.500	0.26	0.284	7.21	0.427	1.90	0.068	1.72	0.016	0.41	4.1	316 SS	CG	P
0.312	7.92	60958S	0.440	11.13	0.280	7.10	1.270	0.22	0.336	8.55	0.426	1.89	0.074	1.88	0.016	0.41	4.5	316 SS	CG	P
0.312	7.92	60959S	0.500	12.70	0.280	7.10	1.100	0.19	0.388	9.83	0.427	1.90	0.080	2.04	0.016	0.41	4.9	316 SS	CG	P
0.312	7.92	60960S	0.560	14.30	0.280	7.10	0.970	0.17	0.439	11.16	0.427	1.90	0.086	2.19	0.016	0.41	5.3	316 SS	CG	P
0.312	7.92	60961S	0.630	15.88	0.280	7.10	0.870	0.15	0.491	12.48	0.427	1.90	0.093	2.36	0.016	0.41	5.6	316 SS	CG	P
0.312	7.92	60962S	0.690	17.48	0.280	7.10	0.790	0.14	0.543	13.75	0.427	1.90	0.099	2.52	0.016	0.41	6	316 SS	CG	P
0.312	7.92	60963S	0.750	19.05	0.280	7.10	0.720	0.13	0.595	15.06	0.427	1.90	0.105	2.68	0.016	0.41	6.4	316 SS	CG	P
0.312	7.92	60964S	0.810	20.65	0.280	7.10	0.660	0.12	0.646	16.35	0.427	1.90	0.112	2.84	0.016	0.41	6.8	316 SS	CG	P
0.312	7.92	60965S	0.880	22.23	0.280	7.10	0.610	0.11	0.699	17.73	0.427	1.90	0.118	3.00	0.016	0.41	7.2	316 SS	CG	P
0.312	7.92	60966S	0.940	23.83	0.280	7.10	0.570	0.10	0.750	18.97	0.427	1.90	0.124	3.16	0.016	0.41	7.6	316 SS	CG	P
0.312	7.92	60967S	1.000	25.40	0.280	7.10	0.530	0.09	0.803	20.40	0.427	1.90	0.131	3.32	0.016	0.41	7.9	316 SS	CG	P
0.312	7.92	60968S	1.250	31.75	0.280	7.10	0.420	0.07	1.009	25.64	0.427	1.90	0.156	3.96	0.016	0.41	9.5	316 SS	CG	P
0.312	7.92	60969S	1.500	38.10	0.280	7.10	0.350	0.06	1.217	31.10	0.427	1.90	0.181	4.60	0.016	0.41	11	316 SS	CG	P
0.312	7.92	60970S	1.750	44.45	0.280	7.10	0.300	0.05	1.423	35.79	0.427	1.90	0.206	5.24	0.016	0.41	12.5	316 SS	CG	P
0.312	7.92	60971S	2.000	50.80	0.280	7.10	0.260	0.05	1.630	41.24	0.427	1.90	0.232	5.89	0.016	0.41	14.1	316 SS	CG	P
0.312	7.92	61344S	0.380	9.53	0.266	6.76	4.090	0.72	0.244	7.42	0.997	4.43	0.131	3.34	0.023	0.58	5.6	316 SS	CG	P
0.312	7.92	61345S	0.440	11.13	0.266	6.76	3.430	0.60	0.291	8.84	0.998	4.44	0.147	3.74	0.023	0.58	6.2	316 SS	CG	P
0.312	7.92	61346S	0.500	12.70	0.266	6.76	2.960	0.52	0.337	10.24	0.998	4.44	0.163	4.15	0.023	0.58	6.9	316 SS	CG	P
0.312	7.92	61347S	0.560	14.30	0.266	6.76	2.600	0.46	0.384	11.68	0.998	4.44	0.179	4.55	0.023	0.58	7.6	316 SS	CG	P
0.312	7.92	61348S	0.630	15.88	0.266	6.76	2.320	0.41	0.430	13.05	0.998	4.44	0.195	4.96	0.023	0.58	8.2	316 SS	CG	P
0.312	7.92	61349S	0.690	17.48	0.266	6.76	2.090	0.37	0.477	14.48	0.999	4.44	0.211	5.36	0.023	0.58	8.9	316 SS	CG	P
0.312	7.92	61350S	0.750	19.05	0.266	6.76	1.910	0.34	0.523	15.86	0.999	4.44	0.227	5.77	0.023	0.58	9.6	316 SS	CG	P
0.312	7.92	61351S	0.810	20.65	0.266	6.76	1.750	0.31	0.570	17.31	0.999	4.44	0.243	6.17	0.023	0.58	10.3	316 SS	CG	P
0.312	7.92	61352S	0.880	22.23	0.266	6.76	1.620	0.28	0.616	18.71	0.999	4.44	0.259	6.58	0.023	0.58	10.9	316 SS	CG	P
0.312	7.92	61353S	0.940	23.83	0.266	6.76	1.510	0.26	0.663	20.13	0.999	4.44	0.275	6.99	0.023	0.58	11.6	316 SS	CG	P
0.312	7.92	61345S	1.000	25.40	0.266	6.76	1.410	0.25	0.709	21.51	0.999	4.44	0.291	7.39	0.023	0.58	12.3	316 SS	CG	P
0.312	7.92	61355S	1.250	31.75	0.266	6.76	1.120	0.20	0.895	27.11	1.000	4.44	0.355	9.01	0.023	0.58	15	316 SS	CG	P
0.312	7.92	61356S	1.380	34.93	0.266	6.76	1.010	0.18	0.988	30.02	1.000	4.44	0.387	9.82	0.023	0.58	16.3	316 SS	CG	P
0.312	7.92	61357S	1.500	38.10	0.266	6.76	0.930	0.16	1.081	32.80	1.000	4.44	0.419	10.63	0.023	0.58	17.7	316 SS	CG	P
0.312	7.92	61358S	1.750	44.45	0.266	6.76	0.790	0.14	1.268	38.50	1.000	4.44	0.482	12.25	0.023	0.58	20.4	316 SS	CG	P
0.312	7.92	61359S	2.000	50.80	0.266	6.76	0.690	0.12	1.454	44.28	1.000	4.44	0.546	13.87	0.023	0.58	23.1	316 SS	CG	P
0.312	7.92	61360S	2.250	57.15	0.266	6.76	0.610	0.11	1.640	49.65	1.000	4.44	0.610	15.49	0.023	0.58	25.8	316 SS	CG	P
0.312	7.92	61361S	2.500	63.50	0.266	6.76	0.550	0.10	1.826	55.34	1.001	4.45	0.674	17.11	0.023	0.58	28.4	316 SS	CG	P
0.312	7.92	61501S	0.440	11.13	0.260	6.60	6.940	1.22	0.253	6.41	1.755	7.80	0.148	3.75	0.026	0.66	5.5	316 SS	CG	P
0.312	7.92	61502S	0.500	12.70	0.260	6.60	5.980	1.05	0.293	7.44	1.751	7.78	0.163	4.14	0.026	0.66	6.1	316 SS	CG	P
0.312	7.92	61503S	0.560	14.30	0.260	6.60	5.240	0.92	0.335	8.49	1.755	7.80	0.178	4.53	0.026	0.66	6.7	316 SS	CG	P
0.312	7.92	61504S	0.630	15.88	0.260	6.60	4.670	0.82	0.375	9.52	1.752	7.79	0.193	4.91	0.026	0.66	7.2	316 SS	CG	P
0.312	7.92	61505S	0.690	17.48	0.260	6.60	4.210	0.74	0.416	10.57	1.751	7.78	0.209	5.30	0.026	0.66	7.8	316 SS	CG	P
0.312	7.92	61506S	0.750	19.05	0.260	6.60	3.840	0.67	0.457	11.59	1.753	7.79	0.224	5.69	0.026	0.66	8.4	316 SS	CG	P
0.312	7.92	61507S	0.810																	




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	E n d s	F in sh								
0.312	7.92	62189S	1.250	31.75	0.218	5.54	23.540	4.12	0.410	10.42	9.650	42.89	0.771	19.58	0.047	1.19	15.9	316 SS	CG	P
0.312	7.92	62190S	1.380	34.93	0.218	5.54	21.240	3.72	0.455	11.54	9.664	42.95	0.844	21.43	0.047	1.19	17.4	316 SS	CG	P
0.312	7.92	62191S	1.500	38.10	0.218	5.54	19.350	3.39	0.499	12.67	9.656	42.92	0.917	23.28	0.047	1.19	18.9	316 SS	CG	P
0.312	7.92	62192S	1.750	44.45	0.218	5.54	16.430	2.88	0.588	14.92	9.661	42.94	1.063	26.99	0.047	1.19	22	316 SS	CG	P
0.312	7.92	62193S	2.000	50.80	0.218	5.54	14.280	2.50	0.677	17.17	9.664	42.95	1.208	30.69	0.047	1.19	25	316 SS	CG	P
0.312	7.92	62194S	2.250	57.15	0.218	5.54	12.620	2.21	0.765	19.43	9.654	42.91	1.354	34.39	0.047	1.19	28	316 SS	CG	P
0.312	7.92	62195S	2.500	63.50	0.218	5.54	11.310	1.98	0.854	21.68	9.657	42.92	1.500	38.10	0.047	1.19	31	316 SS	CG	P
0.312	7.92	62196S	2.750	69.85	0.218	5.54	10.240	1.79	0.943	23.93	9.660	42.93	1.646	41.80	0.047	1.19	34	316 SS	CG	P
0.312	7.92	62197S	3.000	76.20	0.218	5.54	9.360	1.64	1.032	26.18	9.663	42.95	1.792	45.50	0.047	1.19	37	316 SS	CG	P
0.328	8.33	64056S	0.380	9.65	0.264	6.71	25.270	4.42	0.122	3.10	3.083	13.71	0.160	4.06	0.032	0.81	4	316 SS	C	P
0.328	8.33	64057S	0.500	12.70	0.260	6.60	16.433	2.88	0.225	5.72	3.697	16.44	0.238	6.05	0.034	0.86	6	316 SS	C	P
0.328	8.33	64058S	0.750	19.05	0.233	5.92	48.055	8.41	0.196	4.98	9.419	41.90	0.380	9.65	0.048	1.21	8	316 SS	CG	P
0.328	8.33	64060S	0.880	22.35	0.264	6.71	7.220	1.26	0.428	10.87	3.090	13.74	0.320	8.13	0.032	0.81	9	316 SS	C	P
0.328	8.33	64061S	0.910	23.11	0.233	5.92	41.190	7.21	0.228	5.79	9.391	41.77	0.475	12.07	0.048	1.21	9	316 SS	C	P
0.328	8.33	64062S	1.130	28.70	0.220	5.59	86.116	15.07	0.158	4.01	13.606	60.52	0.486	12.34	0.054	1.37	8	316 SS	C	P
0.328	8.33	64063S	1.130	28.70	0.256	6.50	9.921	1.74	0.440	11.18	4.365	19.42	0.378	9.60	0.036	0.91	10.5	316 SS	CG	P
0.328	8.33	64064S	1.380	35.05	0.233	5.92	32.036	5.61	0.293	7.44	9.387	41.75	0.570	14.48	0.048	1.21	11	316 SS	C	P
0.328	8.33	67443S	0.310	7.87	0.268	6.81	10.203	1.79	0.107	2.72	1.092	4.86	0.203	5.16	0.030	0.76	5.8	316 SS	C	P
0.328	8.33	67444S	0.310	7.87	0.280	7.11	11.809	2.07	0.112	2.85	1.323	5.89	0.102	2.59	0.024	0.61	3.3	316 SS	C	P
0.328	8.33	67445S	0.440	11.18	0.276	7.01	10.369	1.82	0.161	4.09	1.669	7.42	0.104	2.64	0.026	0.66	4	316 SS	CG	P
0.328	8.33	67446S	0.440	11.18	0.268	6.81	19.130	3.35	0.133	3.38	2.544	11.32	0.120	3.05	0.030	0.76	4	316 SS	CG	P
0.328	8.33	67447S	0.440	11.18	0.268	6.81	4.783	0.84	0.140	3.56	0.670	2.98	0.300	7.62	0.030	0.76	10	316 SS	CG	P
0.328	8.33	67448S	0.560	14.22	0.264	6.71	25.270	4.42	0.122	3.10	3.083	13.71	0.128	3.25	0.032	0.81	4	316 SS	CG	P
0.328	8.33	67449S	0.590	14.99	0.288	7.32	3.423	0.60	0.224	5.69	0.767	3.41	0.100	2.54	0.020	0.51	4	316 SS	C	P
0.328	8.33	67450S	0.590	14.99	0.302	7.67	0.163	0.03	0.460	11.68	0.075	0.33	0.130	3.30	0.013	0.33	9	316 SS	C	P
0.328	8.33	67451S	0.630	16.00	0.300	7.62	0.222	0.04	0.490	12.45	0.109	0.49	0.140	3.56	0.014	0.36	9	316 SS	C	P
0.328	8.33	67452S	0.630	16.00	0.278	7.06	3.511	0.61	0.424	10.77	1.489	6.62	0.200	5.08	0.025	0.64	7	316 SS	C	P
0.328	8.33	67453S	0.630	16.00	0.278	7.06	3.901	0.68	0.382	9.70	1.490	6.63	0.163	4.14	0.025	0.64	6.5	316 SS	CG	P
0.328	8.33	67454S	0.660	16.76	0.284	7.21	1.703	0.30	0.462	11.74	0.787	3.50	0.198	5.03	0.022	0.56	8	316 SS	C	P
0.328	8.33	67455S	0.690	17.53	0.272	6.91	5.991	1.05	0.348	8.84	2.085	9.27	0.189	4.80	0.028	0.71	6.8	316 SS	CG	P
0.328	8.33	67456S	0.720	18.29	0.270	6.86	5.088	0.89	0.444	11.28	2.259	10.05	0.276	7.01	0.029	0.74	8.5	316 SS	C	P
0.328	8.33	67457S	0.750	19.05	0.266	6.76	5.508	0.96	0.409	10.39	2.253	10.02	0.341	8.66	0.031	0.79	10	316 SS	C	P
0.328	8.33	67458S	0.750	19.05	0.258	6.55	10.653	1.86	0.378	9.60	4.027	17.91	0.350	8.89	0.035	0.89	9	316 SS	C	P
0.328	8.33	67459S	0.750	19.05	0.296	7.52	0.490	0.09	0.614	15.60	0.301	1.34	0.136	3.45	0.016	0.41	7.5	316 SS	C	P
0.328	8.33	67460S	0.750	19.05	0.300	7.62	0.172	0.03	0.582	14.78	0.100	0.45	0.168	4.27	0.014	0.36	11	316 SS	C	P
0.328	8.33	67461S	0.880	22.35	0.280	7.11	2.460	0.43	0.537	13.64	1.321	5.88	0.216	5.49	0.024	0.61	8	316 SS	C	P
0.328	8.33	67462S	0.910	23.11	0.218	5.54	80.311	14.05	0.175	4.45	14.054	62.51	0.550	13.97	0.055	1.40	9	316 SS	C	P
0.328	8.33	67463S	0.910	23.11	0.288	7.32	0.685	0.12	0.670	17.02	0.459	2.04	0.240	6.10	0.020	0.51	12	316 SS	CG	P
0.328	8.33	67464S	1.000	25.40	0.242	6.15	28.401	4.97	0.253	6.43	7.185	31.96	0.409	10.39	0.043	1.09	8.5	316 SS	C	P
0.328	8.33	67465S	1.000	25.40	0.238	6.05	28.269	4.95	0.291	7.39	8.226	36.59	0.450	11.43	0.045	1.14	10	316 SS	CG	P
0.328	8.33	67466S	1.000	25.40	0.284	7.21	1.022	0.18	0.714	18.14	0.730	3.25	0.286	7.26	0.022	0.56	12	316 SS	C	P
0.328	8.33	67467S	1.000	25.40	0.272	6.91	3.348	0.59	0.622	15.80	2.082	9.26	0.322	8.18	0.028	0.71	10.5	316 SS	C	P
0.328	8.33	67468S	1.060	26.92	0.276	7.01	1.728	0.30	0.696	17.68	1.203	5.35	0.364	9.25	0.026	0.66	14	316 SS	CG	P
0.328	8.33	67469S	1.090	27.69	0.278	7.06	1.950	0.34	0.764	19.41	1.490	6.63	0.300	7.62	0.025	0.64	11	316 SS	C	P
0.328	8.33	67470S	1.090	27.69	0.292	7.42	0.440	0.08	0.874	22.20	0.385	1.71	0.216	5.49	0.018	0.46	12	316 SS	CG	P
0.328	8.33	67471S	1.130	28.70	0.268	6.81	5.886	1.03	0.434	11.02	2.555	11.37	0.285	7.24	0.030	0.76	8.5	316 SS	C	P
0.328	8.33	67472S	1.190	30.23	0.203	5.16	135.886	23.78	0.145	3.68	19.703	87.64	0.594	15.09	0.063	1.59	9.5	316 SS	CG	P
0.328	8.33	67473S	1.250	31.75	0.272	6.91	3.557	0.62	0.586	14.88	2.084	9.27	0.308	7.82	0.028	0.71	10	316 SS	C	P
0.328	8.33	67474S	1.310	33.27	0.266	6.76	7.050	1.23	0.399	10.14	2.813	12.51	0.287	7.29	0.031	0.79	8.3	316 SS	C	P
0.328	8.33	67475S	1.380	35.05	0.296	7.52	0.360	0.06	1.100	27.94	0.396	1.76	0.168	4.27	0.016	0.41	9.5	316 SS	C	P
0.328	8.33	67476S	1.410	35.81	0.266	6.76	3.193	0.56	0.881	22.38	2.813	12.51	0.521	13.23	0.031	0.79	15.8	316 SS	C	P
0.328	8.33	67477S	1.470	37.34	0.284	7.21	0.852	0.15	1.162	29.52	0.990	4.40	0.308	7.82	0.022	0.56	14	316 SS	CG	P
0.328	8.33	67478S	1.500	38.10	0.266	6.76	2.592	0.45	0.880	22.35	2.281	10.15	0.620	15.75	0.031	0.79	19	316 SS	C	P
0.328	8.33	67479S	1.940	49.28	0.280	7.11	0.984	0.17	1.341	34.06	1.320	5.87	0.432	10.97	0.024	0.61	17	316 SS	C	P




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends C P								
0.328	8.33	68448S	0.880	22.35	0.228	5.79	51.947	9.09	0.210	5.33	10.909	48.52	0.500	12.70	0.050	1.27	9	316 SS	C P
0.328	8.33	68449S	0.880	22.35	0.264	6.71	5.434	0.95	0.518	13.16	2.815	12.52	0.362	9.20	0.032	0.81	11.3	316 SS	CG P
0.328	8.33	68450S	0.880	22.35	0.212	5.39	119.779	20.96	0.136	3.45	16.290	72.46	0.464	11.79	0.058	1.47	8	316 SS	CG P
0.328	8.33	68451S	0.940	23.88	0.220	5.59	57.410	10.05	0.237	6.02	13.606	60.52	0.648	16.46	0.054	1.37	11	316 SS	C P
0.328	8.33	68452S	1.000	25.40	0.238	6.05	32.307	5.65	0.254	6.45	8.206	36.50	0.450	11.43	0.045	1.14	9	316 SS	C P
0.328	8.33	68453S	1.000	25.40	0.238	6.05	23.805	4.17	0.345	8.76	8.213	36.53	0.563	14.30	0.045	1.14	11.5	316 SS	C P
0.328	8.33	68454S	1.000	25.40	0.248	6.30	16.745	2.93	0.355	9.02	5.944	26.44	0.400	10.16	0.040	1.02	10	316 SS	CG P
0.328	8.33	68455S	1.000	25.40	0.226	5.74	56.840	9.95	0.203	5.16	11.539	51.33	0.459	11.66	0.051	1.30	9	316 SS	CG P
0.328	8.33	68456S	1.030	26.16	0.256	6.50	11.244	1.97	0.388	9.86	4.363	19.41	0.378	9.60	0.036	0.91	9.5	316 SS	C P
0.328	8.33	68457S	1.060	26.92	0.233	5.92	32.764	5.73	0.287	7.29	9.403	41.83	0.513	13.03	0.048	1.21	10.8	316 SS	CG P
0.328	8.33	68458S	1.130	28.70	0.228	5.79	103.893	18.18	0.105	2.67	10.909	48.52	0.275	6.99	0.050	1.27	5.5	316 SS	CG P
0.328	8.33	68459S	1.190	30.23	0.233	5.92	36.041	6.31	0.261	6.63	9.407	41.84	0.475	12.07	0.048	1.21	10	316 SS	CG P
0.328	8.33	68460S	1.190	30.23	0.226	5.74	39.788	6.96	0.290	7.37	11.539	51.33	0.612	15.55	0.051	1.30	12	316 SS	CG P
0.328	8.33	68461S	1.190	30.23	0.248	6.30	11.649	2.04	0.511	12.98	5.953	26.48	0.540	13.72	0.040	1.02	13.5	316 SS	CG P
0.328	8.33	68462S	1.220	30.99	0.228	5.79	38.276	6.70	0.285	7.24	10.909	48.52	0.575	14.61	0.050	1.27	11.5	316 SS	CG P
0.328	8.33	68465S	1.280	32.51	0.246	6.25	13.583	2.38	0.471	11.96	6.398	28.46	0.574	14.58	0.041	1.04	13	316 SS	C P
0.328	8.33	68467S	1.470	37.34	0.228	5.79	30.302	5.30	0.361	9.17	10.939	48.66	0.700	17.78	0.050	1.27	14	316 SS	CG P
0.328	8.33	68468S	1.500	38.10	0.250	6.35	7.488	1.31	0.738	18.75	5.526	24.58	0.702	17.83	0.039	0.99	18	316 SS	CG P
0.328	8.33	68469S	1.590	40.39	0.256	6.50	12.047	2.11	0.363	9.22	4.373	19.45	0.360	9.14	0.036	0.91	9	316 SS	C P
0.328	8.33	68470S	1.590	40.39	0.260	6.60	4.382	0.77	0.842	21.39	3.690	16.41	0.578	14.68	0.034	0.86	17	316 SS	CG P
0.328	8.33	68471S	1.690	42.93	0.233	5.92	19.222	3.36	0.489	12.42	9.400	41.81	0.808	20.52	0.048	1.21	17	316 SS	CG P
0.328	8.33	68472S	1.750	44.45	0.244	6.20	13.856	2.43	0.485	12.32	6.720	29.89	0.588	14.94	0.042	1.07	14	316 SS	CG P
0.328	8.33	68473S	1.750	44.45	0.218	5.54	26.770	4.69	0.485	12.32	12.983	57.75	1.265	32.13	0.055	1.40	23	316 SS	CG P
0.328	8.33	68474S	1.880	47.75	0.246	6.25	8.301	1.45	0.770	19.56	6.392	28.43	0.861	21.87	0.041	1.04	20	316 SS	C P
0.328	8.33	68475S	1.880	47.75	0.208	5.28	56.107	9.82	0.322	8.18	18.066	80.36	1.020	25.91	0.060	1.52	17	316 SS	CG P
0.328	8.33	68476S	1.940	49.28	0.218	5.54	27.423	4.80	0.512	13.01	14.041	62.45	1.238	31.45	0.055	1.40	22.5	316 SS	CG P
0.328	8.33	68477S	1.940	49.28	0.212	5.39	35.057	6.14	0.466	11.84	16.337	72.67	1.305	33.15	0.058	1.47	22.5	316 SS	CG P
0.328	8.33	68478S	1.940	49.28	0.220	5.59	25.205	4.41	0.541	13.74	13.636	60.65	1.215	30.86	0.054	1.37	22.5	316 SS	CG P
0.328	8.33	68479S	2.000	50.80	0.233	5.92	26.212	4.59	0.359	9.12	9.410	41.86	0.618	15.70	0.048	1.21	13	316 SS	CG P
0.328	8.33	68480S	2.000	50.80	0.246	6.25	10.827	1.90	0.591	15.01	6.399	28.46	0.648	16.46	0.041	1.04	15.8	316 SS	CG P
0.328	8.33	68481S	2.250	57.15	0.248	6.30	8.372	1.47	0.711	18.06	5.952	26.47	0.720	18.29	0.040	1.02	18	316 SS	CG P
0.328	8.33	68482S	2.310	58.67	0.220	5.59	23.486	4.11	0.580	14.73	13.622	60.59	1.350	34.29	0.054	1.37	24	316 SS	C P
0.328	8.33	64059S	0.880	22.35	0.184	4.67	400.452	70.08	0.073	1.85	29.233	130.03	0.576	14.63	0.072	1.83	7	316 SS	C P
0.338	8.59	68483S	1.480	37.59	0.274	6.96	4.575	0.80	0.657	16.69	3.006	13.37	0.416	10.57	0.032	0.81	12	316 SS	C P
0.343	8.71	64067S	0.530	13.46	0.279	7.09	8.715	1.53	0.274	6.96	2.388	10.62	0.256	6.50	0.032	0.81	7	316 SS	C P
0.343	8.71	64068S	0.810	20.57	0.235	5.97	73.391	12.84	0.179	4.55	13.137	58.43	0.486	12.34	0.054	1.37	8	316 SS	C P
0.343	8.71	64069S	0.810	20.57	0.223	5.66	119.125	20.85	0.145	3.68	17.273	76.83	0.480	12.19	0.060	1.52	8	316 SS	CG P
0.343	8.71	64070S	1.000	25.40	0.261	6.63	15.451	2.70	0.397	10.08	6.134	27.28	0.463	11.76	0.041	1.04	10.3	316 SS	C P
0.343	8.71	64071S	1.000	25.40	0.279	7.09	6.704	1.17	0.442	11.23	2.963	13.18	0.272	6.91	0.032	0.81	8.5	316 SS	CG P
0.343	8.71	64072S	1.440	36.58	0.248	6.30	24.661	4.32	0.366	9.30	9.026	40.15	0.570	14.48	0.048	1.21	12	316 SS	CG P
0.343	8.71	64073S	1.500	38.10	0.218	5.54	101.675	17.79	0.187	4.75	19.013	84.57	0.656	16.66	0.063	1.59	10.5	316 SS	CG P
0.343	8.71	64074S	1.500	38.10	0.248	6.30	20.551	3.60	0.439	11.15	9.022	40.13	0.713	18.11	0.048	1.21	14	316 SS	C P
0.343	8.71	64075S	2.130	54.10	0.248	6.30	13.701	2.40	0.659	16.74	9.029	40.16	0.950	24.13	0.048	1.21	20	316 SS	CG P
0.343	8.71	67481S	0.280	7.11	0.283	7.19	16.509	2.89	0.148	3.76	2.443	10.87	0.120	3.05	0.030	0.76	4	316 SS	CG P
0.343	8.71	67482S	0.310	7.87	0.215	8.00	0.270	0.05	0.198	5.03	0.053	0.24	0.112	2.85	0.014	0.36	7	316 SS	C P
0.343	8.71	67483S	0.310	7.87	0.295	7.49	8.517	1.49	0.148	3.76	1.261	5.61	0.108	2.74	0.024	0.61	3.5	316 SS	C P
0.343	8.71	67484S	0.340	8.64	0.303	7.70	3.391	0.59	0.217	5.51	0.736	3.27	0.075	1.91	0.020	0.51	3.8	316 SS	CG P
0.343	8.71	67485S	0.380	9.65	0.315	8.00	0.449	0.08	0.296	7.52	0.133	0.59	0.084	2.13	0.014	0.36	5	316 SS	C P
0.343	8.71	67486S	0.380	9.65	0.283	7.19	16.509	2.89	0.148	3.76	2.443	10.87	0.150	3.81	0.030	0.76	4	316 SS	C P
0.343	8.71	67487S	0.440	11.18	0.281	7.14	19.005	3.33	0.142	3.61	2.699	12.01	0.155	3.94	0.031	0.79	4	316 SS	C P
0.343	8.71	67488S	0.500	12.70	0.253	6.43	70.433	12.33	0.112	2.85	7.888	35.09	0.214	5.44	0.045	1.14	4.8	316 SS	CG P
0.343	8.71	67489S	0.500	12.70	0.303	7.70	2.638	0.46	0.279	7.09	0.736	3.27	0.105	2.67	0.020	0.51	4.3	316 SS	C P
0.343	8.71	67490S	0.500	12.70	0.287	7.29	12.291	2.15	0.162	4.12	1.991	8.86	0.140	3.56	0.028	0.71	4	316 SS	C P
0.343	8.71	67491S	0.500	12.70	0.283	7.19	2.871	0.50	0.065	1.65	0.187	0.83	0.435	11.05	0.030	0.76	13.5	316 SS	C P
0.343	8.71	67492S	0.530	13.46	0.283	7.19	9.434	1.65	0.259	6.58	2.443	10.87	0.						




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm		Wire Dia. Inches mm		Total Coils	E n d s Mat'l	F n s h		
0.343	8.71	67513S	1.000	25.40	0.307	7.80	0.546	0.10	0.820	20.83	0.448	1.99	0.180	4.57	0.018	0.46	9	316 SS C P
0.343	8.71	67514S	1.000	25.40	0.283	7.19	4.717	0.83	0.519	13.18	2.448	10.89	0.270	6.86	0.030	0.76	9	316 SS CG P
0.343	8.71	67515S	1.030	26.16	0.283	7.19	3.669	0.64	0.667	16.94	2.447	10.88	0.360	9.14	0.030	0.76	11	316 SS C P
0.343	8.71	67516S	1.030	26.16	0.295	7.49	1.278	0.22	0.742	18.85	0.948	4.22	0.288	7.32	0.024	0.61	12	316 SS CG P
0.343	8.71	67517S	1.190	30.23	0.299	7.60	1.107	0.19	0.882	22.40	0.976	4.34	0.220	5.59	0.022	0.56	10	316 SS CG P
0.343	8.71	67518S	1.250	31.75	0.273	6.93	9.877	1.73	0.390	9.91	3.852	17.13	0.333	8.46	0.035	0.89	8.5	316 SS C P
0.343	8.71	67519S	1.280	32.51	0.273	6.93	6.420	1.12	0.601	15.27	3.858	17.16	0.455	11.56	0.035	0.89	12	316 SS C P
0.343	8.71	67520S	1.380	35.05	0.279	7.09	6.704	1.17	0.442	11.23	2.963	13.18	0.304	7.72	0.032	0.81	8.5	316 SS CG P
0.343	8.71	67521S	1.380	35.05	0.287	7.29	2.235	0.39	0.893	22.68	1.996	8.88	0.392	9.96	0.028	0.71	13	316 SS C P
0.343	8.71	67522S	1.440	36.58	0.293	7.44	1.205	0.21	1.050	26.67	1.265	5.63	0.390	9.91	0.025	0.64	14.6	316 SS C P
0.343	8.71	67523S	1.500	38.10	0.283	7.19	3.302	0.58	0.741	18.82	2.447	10.88	0.390	9.91	0.030	0.76	12	316 SS C P
0.343	8.71	67524S	1.500	38.10	0.283	7.19	3.002	0.53	0.815	20.70	2.447	10.88	0.420	10.67	0.030	0.76	13	316 SS C P
0.343	8.71	67525S	1.530	38.86	0.311	7.90	0.302	0.05	1.255	31.88	0.379	1.69	0.172	4.37	0.016	0.41	9.8	316 SS CG P
0.343	8.71	67526S	1.560	39.62	0.303	7.70	0.424	0.07	1.220	30.99	0.517	2.30	0.340	8.64	0.020	0.51	16	316 SS C P
0.343	8.71	67527S	2.000	50.80	0.293	7.44	0.607	0.11	1.300	33.02	0.789	3.51	0.700	17.78	0.025	0.64	27	316 SS C P
0.343	8.71	67528S	2.000	50.80	0.279	7.09	2.723	0.48	1.087	27.61	2.960	13.17	0.608	15.44	0.032	0.81	18	316 SS C P
0.343	8.71	67529S	2.160	54.86	0.293	7.44	0.675	0.12	1.522	38.66	1.027	4.57	0.638	16.21	0.025	0.64	24.5	316 SS CG P
0.343	8.71	67530S	2.160	54.86	0.287	7.29	2.235	0.39	0.893	22.68	1.996	8.88	0.392	9.96	0.028	0.71	13	316 SS C P
0.343	8.71	67531S	2.250	57.15	0.291	7.39	0.753	0.13	1.553	39.45	1.169	5.20	0.697	17.70	0.026	0.66	25.8	316 SS C P
0.343	8.71	67532S	2.340	59.44	0.287	7.29	1.639	0.29	1.218	30.94	1.996	8.88	0.504	12.80	0.028	0.71	17	316 SS C P
0.343	8.71	67533S	2.500	63.50	0.299	7.60	0.443	0.08	1.994	50.65	0.883	3.93	0.506	12.85	0.022	0.56	22	316 SS C P
0.343	8.71	68484S	0.310	7.87	0.275	6.99	56.617	9.91	0.063	1.60	3.567	15.87	0.136	3.45	0.034	0.86	3	316 SS CG P
0.343	8.71	68485S	0.340	8.64	0.261	6.63	42.747	7.48	0.135	3.43	5.771	25.67	0.205	5.21	0.041	1.04	5	316 SS CG P
0.343	8.71	68486S	0.380	9.65	0.279	7.09	10.253	1.79	0.180	4.57	1.846	8.21	0.200	5.08	0.032	0.81	6.3	316 SS CG P
0.343	8.71	68487S	0.410	10.41	0.243	6.17	124.236	21.74	0.084	2.13	10.436	46.42	0.225	5.72	0.050	1.27	4.5	316 SS CG P
0.343	8.71	68488S	0.440	11.18	0.275	6.99	28.309	4.95	0.125	3.18	3.539	15.74	0.170	4.32	0.034	0.86	4	316 SS C P
0.343	8.71	68489S	0.450	11.43	0.263	6.68	41.830	7.32	0.137	3.48	5.731	25.49	0.230	5.84	0.040	1.02	4.8	316 SS C P
0.343	8.71	68490S	0.500	12.70	0.273	6.93	21.400	3.75	0.180	4.57	3.852	17.13	0.210	5.33	0.035	0.89	5	316 SS C P
0.343	8.71	68492S	0.500	12.70	0.243	6.17	73.080	12.79	0.144	3.66	10.524	46.81	0.313	7.95	0.050	1.27	6.3	316 SS CG P
0.343	8.71	68494S	0.560	14.22	0.261	6.63	32.060	5.61	0.192	4.88	6.156	27.38	0.246	6.25	0.041	1.04	6	316 SS CG P
0.343	8.71	68495S	0.560	14.22	0.279	7.09	12.450	2.18	0.238	6.05	2.963	13.18	0.208	5.28	0.032	0.81	5.5	316 SS C P
0.343	8.71	68496S	0.630	16.00	0.253	6.43	38.738	6.78	0.203	5.16	7.864	34.98	0.360	9.14	0.045	1.14	7	316 SS C P
0.343	8.71	68497S	0.630	16.00	0.273	6.93	16.050	2.81	0.240	6.10	3.852	17.13	0.245	6.22	0.035	0.89	6	316 SS C P
0.343	8.71	68498S	0.660	16.76	0.267	6.78	15.311	2.68	0.321	8.15	4.915	21.86	0.304	7.72	0.038	0.97	8	316 SS CG P
0.343	8.71	68499S	0.690	17.53	0.263	6.68	32.867	5.75	0.174	4.42	5.719	25.44	0.260	6.60	0.040	1.02	5.5	316 SS C P
0.343	8.71	68500S	0.690	17.53	0.261	6.63	32.060	5.61	0.192	4.88	6.156	27.38	0.246	6.25	0.041	1.04	6	316 SS CG P
0.343	8.71	68501S	0.690	17.53	0.271	6.88	12.094	2.12	0.346	8.79	4.185	18.62	0.288	7.32	0.036	0.91	8	316 SS CG P
0.343	8.71	68502S	0.690	17.53	0.241	6.12	113.219	19.81	0.098	2.49	11.095	49.35	0.255	6.48	0.051	1.30	5	316 SS CG P
0.343	8.71	68503S	0.720	18.29	0.263	6.68	28.758	5.03	0.199	5.06	5.723	25.46	0.280	7.11	0.040	1.02	6	316 SS C P
0.343	8.71	68504S	0.750	19.05	0.267	6.78	15.311	2.68	0.321	8.15	4.915	21.86	0.304	7.72	0.038	0.97	8	316 SS CG P
0.343	8.71	68505S	0.750	19.05	0.267	6.78	15.976	2.80	0.307	7.80	4.905	21.82	0.295	7.49	0.038	0.97	7.8	316 SS CG P
0.343	8.71	68506S	0.750	19.05	0.227	5.77	94.010	16.45	0.167	4.24	15.700	69.83	0.493	12.52	0.058	1.47	8.5	316 SS CG P
0.343	8.71	68507S	0.750	19.05	0.223	5.66	102.108	17.87	0.169	4.29	17.256	76.76	0.540	13.72	0.060	1.52	9	316 SS CG P
0.343	8.71	68508S	0.750	19.05	0.223	5.66	98.587	17.25	0.176	4.47	17.351	77.18	0.555	14.10	0.060	1.52	9.3	316 SS CG P
0.343	8.71	68509S	0.750	19.05	0.227	5.77	94.010	16.45	0.167	4.24	15.700	69.83	0.493	12.52	0.058	1.47	8.5	316 SS CG P
0.343	8.71	68510S	0.810	20.57	0.279	7.09	5.810	1.02	0.474	12.04	2.754	12.25	0.336	8.53	0.032	0.81	9.5	316 SS C P
0.343	8.71	68511S	0.840	21.34	0.218	5.54	144.039	25.21	0.132	3.35	19.013	84.57	0.500	12.70	0.063	1.59	8	316 SS CG P
0.343	8.71	68512S	0.840	21.34	0.279	7.09	10.894	1.91	0.272	6.91	2.963	13.18	0.224	5.69	0.032	0.81	6	316 SS C P
0.343	8.71	68513S	0.880	22.35	0.261	6.63	17.099	2.99	0.359	9.12	6.139	27.31	0.390	9.91	0.041	1.04	9.5	316 SS CG P
0.343	8.71	68515S	0.880	22.35	0.267	6.78	16.116	2.82	0.305	7.75	4.915	21.86	0.293	7.44	0.038	0.97	7.7	316 SS CG P
0.343	8.71	68517S	0.880	22.35	0.267	6.78	15.311	2.68	0.321	8.15	4.915	21.86	0.342	8.69	0.038	0.97	8	316 SS C P
0.343	8.71	68518S	0.910	23.11	0.261	6.63	9.160	1.60	0.213	5.41	1.951	8.68	0.697	17.70	0.041	1.04	16	316 SS CG P
0.343	8.71	68519S	0.910	23.11	0.243	6.17	56.471	9.88	0.186	4.72	10.504	46.72	0.375	9.53	0.050	1.27	7.5	316 SS CG P
0.343	8.71	68520S	0.940	23.88	0.259	6.58	17.829	3.12	0.362	9.20	6.454	28.71	0.462	11.74	0.042	1.07	10	316 SS C P
0.343	8.71	68521S	0.940	23.88	0.248	6.30	35.230	6.17	0.256	6.50	9.019	40.12	0.475	12.07	0.048	1.21	9	316 SS C P
0.343	8.71	68522S	0.970	24.64	0.248	6.30	30.826	5.40	0.293	7.44	9.032	40.17	0.					




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.343	8.71	68543S	1.630	41.40	0.243	6.17	23.353	4.09	0.449	11.41	10.485	46.64	0.765	19.43	0.050	1.27	15.3	316 SS	CG	P
0.343	8.71	68544S	1.810	45.97	0.227	5.77	34.918	6.11	0.450	11.43	15.713	69.89	1.131	28.73	0.058	1.47	19.5	316 SS	CG	P
0.343	8.71	68545S	1.910	48.51	0.227	5.77	43.647	7.64	0.360	9.14	15.713	69.89	0.928	23.57	0.058	1.47	16	316 SS	CG	P
0.343	8.71	68546S	2.000	50.80	0.209	5.31	63.056	11.04	0.367	9.32	23.142	102.94	1.407	35.74	0.067	1.70	21	316 SS	CG	P
0.343	8.71	68547S	2.000	50.80	0.263	6.68	6.767	1.18	0.844	21.44	5.711	25.40	0.760	19.30	0.040	1.02	19	316 SS	CG	P
0.343	8.71	68548S	2.000	50.80	0.275	6.99	3.774	0.66	0.938	23.83	3.540	15.75	0.612	15.55	0.034	0.86	17	316 SS	C	P
0.343	8.71	68549S	2.000	50.80	0.263	6.68	8.217	1.44	0.695	17.65	5.711	25.40	0.680	17.27	0.040	1.02	16	316 SS	C	P
0.343	8.71	68550S	2.000	50.80	0.271	6.88	3.819	0.67	1.096	27.84	4.186	18.62	0.792	20.12	0.036	0.91	21	316 SS	C	P
0.343	8.71	68551S	2.440	61.98	0.243	6.17	19.412	3.40	0.541	13.74	10.502	46.71	0.950	24.13	0.050	1.27	18	316 SS	C	P
0.343	8.71	68552S	2.500	63.50	0.257	6.53	7.194	1.26	0.960	24.38	6.906	30.72	1.032	26.21	0.043	1.09	24	316 SS	CG	P
0.350	8.89	67535S	0.620	15.75	0.286	7.26	3.705	0.65	0.204	5.18	0.756	3.36	0.416	10.57	0.032	0.81	13	316 SS	CG	P
0.350	8.89	67536S	1.870	47.50	0.308	7.82	0.427	0.08	1.471	37.36	0.628	2.79	0.399	10.14	0.021	0.53	18	316 SS	C	P
0.360	9.14	64076S	0.250	6.35	0.296	7.52	37.144	6.50	0.076	1.93	2.823	12.56	0.128	3.25	0.032	0.81	3	316 SS	C	P
0.360	9.14	64077S	1.130	28.70	0.235	5.97	90.548	15.85	0.202	5.13	18.291	81.36	0.625	15.88	0.063	1.59	10	316 SS	CG	P
0.360	9.14	67537S	0.250	6.35	0.330	8.38	0.514	0.09	0.160	4.06	0.082	0.37	0.090	2.29	0.015	0.38	5	316 SS	C	P
0.360	9.14	67538S	0.340	8.64	0.300	7.62	11.270	1.97	0.205	5.21	2.310	10.28	0.135	3.43	0.030	0.76	4.5	316 SS	CG	P
0.360	9.14	67539S	0.380	9.65	0.296	7.52	21.225	3.71	0.133	3.38	2.823	12.56	0.120	3.05	0.032	0.81	3.8	316 SS	CG	P
0.360	9.14	67540S	0.380	9.65	0.258	6.55	143.313	25.08	0.074	1.88	10.605	47.17	0.204	5.18	0.051	1.30	4	316 SS	CG	P
0.360	9.14	67541S	0.380	9.65	0.316	8.03	2.528	0.44	0.248	6.30	0.627	2.79	0.132	3.35	0.022	0.56	5	316 SS	C	P
0.360	9.14	67542S	0.440	11.18	0.312	7.93	4.859	0.85	0.248	6.30	1.205	5.36	0.126	3.20	0.024	0.61	4.3	316 SS	C	P
0.360	9.14	67543S	0.500	12.70	0.298	7.57	10.806	1.89	0.238	6.05	2.572	11.44	0.186	4.72	0.031	0.79	5	316 SS	C	P
0.360	9.14	67544S	0.500	12.70	0.308	7.82	7.665	1.34	0.199	5.06	1.525	6.78	0.104	2.64	0.026	0.66	4	316 SS	CG	P
0.360	9.14	67545S	0.500	12.70	0.304	7.72	10.498	1.84	0.181	4.60	1.900	8.45	0.140	3.56	0.028	0.71	4	316 SS	C	P
0.360	9.14	67546S	0.500	12.70	0.296	7.52	14.858	2.60	0.190	4.83	2.823	12.56	0.176	4.47	0.032	0.81	4.5	316 SS	C	P
0.360	9.14	67547S	0.500	12.70	0.310	7.87	6.494	1.14	0.210	5.33	1.364	6.07	0.125	3.18	0.025	0.64	4	316 SS	C	P
0.360	9.14	67548S	0.530	13.46	0.318	8.08	3.120	0.55	0.260	6.60	0.811	3.61	0.084	2.13	0.021	0.53	4	316 SS	CG	P
0.360	9.14	67549S	0.560	14.22	0.312	7.93	4.373	0.77	0.276	7.01	1.207	5.37	0.108	2.74	0.024	0.61	4.5	316 SS	CG	P
0.360	9.14	67550S	0.560	14.22	0.274	6.96	38.330	6.71	0.172	4.37	6.593	29.33	0.280	7.11	0.043	1.09	5.5	316 SS	C	P
0.360	9.14	67551S	0.560	14.22	0.332	8.43	0.386	0.07	0.476	12.09	0.184	0.82	0.084	2.13	0.014	0.36	5	316 SS	C	P
0.360	9.14	67552S	0.590	14.99	0.316	8.03	3.255	0.57	0.286	7.26	0.931	4.14	0.095	2.41	0.022	0.56	4.3	316 SS	CG	P
0.360	9.14	67553S	0.630	16.00	0.296	7.52	10.613	1.86	0.267	6.78	2.834	12.61	0.176	4.47	0.032	0.81	5.5	316 SS	CG	P
0.360	9.14	67554S	0.630	16.00	0.310	7.87	1.732	0.30	0.367	9.32	0.636	2.83	0.263	6.68	0.025	0.64	9.5	316 SS	C	P
0.360	9.14	67555S	0.630	16.00	0.324	8.23	0.937	0.16	0.513	13.03	0.481	2.14	0.117	2.97	0.018	0.46	5.5	316 SS	C	P
0.360	9.14	67556S	0.630	16.00	0.308	7.82	6.132	1.07	0.249	6.33	1.527	6.79	0.117	2.97	0.026	0.66	4.5	316 SS	CG	P
0.360	9.14	67557S	0.630	16.00	0.318	8.08	2.773	0.49	0.292	7.42	0.810	3.60	0.110	2.79	0.021	0.53	4.3	316 SS	C	P
0.360	9.14	67558S	0.670	17.02	0.235	5.97	120.731	21.13	0.151	3.84	18.230	81.09	0.500	12.70	0.063	1.59	8	316 SS	CG	P
0.360	9.14	67559S	0.690	17.53	0.312	7.93	1.093	0.19	0.378	9.60	0.413	1.84	0.312	7.93	0.024	0.61	12	316 SS	C	P
0.360	9.14	67560S	0.690	17.53	0.312	7.93	4.373	0.77	0.276	7.01	1.207	5.37	0.132	3.35	0.024	0.61	4.5	316 SS	C	P
0.360	9.14	67561S	0.690	17.53	0.310	7.87	4.723	0.83	0.288	7.32	1.360	6.05	0.144	3.66	0.025	0.64	4.8	316 SS	C	P
0.360	9.14	67562S	0.720	18.29	0.318	8.08	1.135	0.20	0.541	13.74	0.614	2.73	0.179	4.55	0.021	0.53	7.5	316 SS	C	P
0.360	9.14	67563S	0.750	19.05	0.296	7.52	9.286	1.63	0.305	7.75	2.832	12.60	0.224	5.69	0.032	0.81	6	316 SS	C	P
0.360	9.14	67564S	0.750	19.05	0.316	8.03	2.528	0.44	0.369	9.37	0.933	4.15	0.110	2.79	0.022	0.56	5	316 SS	CG	P
0.360	9.14	67565S	0.750	19.05	0.304	7.72	6.460	1.13	0.295	7.49	1.906	8.48	0.147	3.73	0.028	0.71	5.3	316 SS	CG	P
0.360	9.14	67566S	0.750	19.05	0.290	7.37	12.143	2.13	0.303	7.70	3.679	16.36	0.228	5.79	0.035	0.89	6.5	316 SS	CG	P
0.360	9.14	67567S	0.750	19.05	0.310	7.87	4.329	0.76	0.315	8.00	1.364	6.07	0.150	3.81	0.025	0.64	5	316 SS	C	P
0.360	9.14	67568S	0.780	19.81	0.292	7.42	12.053	2.11	0.281	7.14	3.387	15.07	0.204	5.18	0.034	0.86	6	316 SS	CG	P
0.360	9.14	67569S	0.810	20.57	0.304	7.72	3.999	0.70	0.477	12.12	1.908	8.49	0.203	5.16	0.028	0.71	7.3	316 SS	CG	P
0.360	9.14	67570S	0.810	20.57	0.308	7.82	5.110	0.89	0.299	7.60	1.528	6.80	0.156	3.96	0.026	0.66	5	316 SS	C	P
0.360	9.14	67571S	0.840	21.34	0.304	7.72	5.249	0.92	0.363	9.22	1.905	8.47	0.196	4.98	0.028	0.71	6	316 SS	C	P
0.360	9.14	67572S	0.880	22.35	0.310	7.87	3.711	0.65	0.367	9.32	1.362	6.06	0.163	4.14	0.025	0.64	5.5	316 SS	CG	P
0.360	9.14	67573S	0.880	22.35	0.300	7.62	5.123	0.90	0.456	11.58	2.336	10.39	0.225	5.72	0.030	0.76	7.5	316 SS	CG	P
0.360	9.14	67574S	0.880	22.35	0.302	7.67	3.483	0.61	0.590	14.99	2.055	9.14	0.290	7.37	0.029	0.74	9	316 SS	C	P
0.360	9.14	67575S	0.880	22.35	0.304	7.72	5.599	0.98	0.340	8.64	1.904	8.47	0.189	4.80	0.028	0.71	5.8	316 SS	C	P
0.360	9.14	67576S	0.930	23.62	0.258	6.55	38.217	6.69	0.278	7.06	10.624	47.26	0.536	13.61	0.051	1.30	9.5	316 SS	C	P
0.360																				




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	E n d s h									
0.360	9.14	67598S	1.340	34.04	0.284	7.21	8.674	1.52	0.541	13.74	4.693	20.87	0.418	10.62	0.038	0.97	11	316 SS	CG	P
0.360	9.14	67599S	1.440	36.58	0.270	6.86	14.909	2.61	0.506	12.85	7.544	33.56	0.630	16.00	0.045	1.14	13	316 SS	C	P
0.360	9.14	67600S	1.500	38.10	0.296	7.52	4.370	0.77	0.648	16.46	2.832	12.60	0.368	9.35	0.032	0.81	10.5	316 SS	C	P
0.360	9.14	67601S	1.500	38.10	0.270	6.86	15.618	2.73	0.483	12.27	7.543	33.55	0.563	14.30	0.045	1.14	12.5	316 SS	CG	P
0.360	9.14	67602S	1.500	38.10	0.312	7.93	1.093	0.19	1.103	28.02	1.206	5.36	0.312	7.93	0.024	0.61	12	316 SS	C	P
0.360	9.14	67603S	1.530	38.86	0.292	7.42	5.809	1.02	0.582	14.78	3.381	15.04	0.384	9.75	0.034	0.86	10.3	316 SS	C	P
0.360	9.14	67604S	1.750	44.45	0.310	7.87	1.237	0.22	1.101	27.97	1.362	6.06	0.338	8.59	0.025	0.64	12.5	316 SS	C	P
0.360	9.14	67605S	2.000	50.80	0.310	7.87	0.541	0.10	1.325	33.66	0.717	3.19	0.675	17.15	0.025	0.64	26	316 SS	C	P
0.360	9.14	67606S	2.000	50.80	0.296	7.52	2.321	0.41	1.219	30.96	2.829	12.58	0.608	15.44	0.032	0.81	18	316 SS	C	P
0.360	9.14	67607S	2.000	50.80	0.302	7.67	1.524	0.27	1.386	35.20	2.112	9.39	0.551	14.00	0.029	0.74	18	316 SS	C	P
0.360	9.14	67608S	2.250	57.15	0.298	7.57	2.947	0.52	0.873	22.17	2.573	11.45	0.403	10.24	0.031	0.79	13	316 SS	CG	P
0.360	9.14	67609S	2.340	59.44	0.304	7.72	1.500	0.26	1.271	32.28	1.907	8.48	0.448	11.38	0.028	0.71	16	316 SS	CG	P
0.360	9.14	67610S	2.500	63.50	0.270	6.86	8.631	1.51	0.874	22.20	7.543	33.55	0.990	25.15	0.045	1.14	21	316 SS	C	P
0.360	9.14	68553S	0.250	6.35	0.284	7.21	78.069	13.66	0.060	1.52	4.684	20.83	0.114	2.90	0.038	0.97	3	316 SS	CG	P
0.360	9.14	68554S	0.380	9.65	0.292	7.42	24.107	4.22	0.140	3.56	3.375	15.01	0.170	4.32	0.034	0.86	4	316 SS	C	P
0.360	9.14	68555S	0.380	9.65	0.284	7.21	39.034	6.83	0.120	3.05	4.684	20.83	0.190	4.83	0.038	0.97	4	316 SS	C	P
0.360	9.14	68556S	0.410	10.41	0.250	6.35	161.258	28.22	0.080	2.03	12.901	57.38	0.248	6.30	0.055	1.40	4.5	316 SS	CG	P
0.360	9.14	68557S	0.410	10.41	0.278	7.06	27.203	4.76	0.123	3.12	3.346	14.88	0.287	7.29	0.041	1.04	6	316 SS	C	P
0.360	9.14	68558S	0.410	10.41	0.224	5.69	477.106	83.49	0.049	1.25	23.378	103.99	0.289	7.34	0.068	1.73	4.3	316 SS	CG	P
0.360	9.14	68559S	0.410	10.41	0.288	7.32	16.461	2.88	0.167	4.24	2.749	12.23	0.243	6.17	0.036	0.91	5.8	316 SS	C	P
0.360	9.14	68560S	0.440	11.18	0.260	6.60	87.415	15.30	0.115	2.92	10.053	44.72	0.250	6.35	0.050	1.27	5	316 SS	CG	P
0.360	9.14	68561S	0.440	11.18	0.276	7.01	40.319	7.06	0.153	3.89	6.169	27.44	0.210	5.33	0.042	1.07	5	316 SS	CG	P
0.360	9.14	68562S	0.440	11.18	0.282	7.16	34.971	6.12	0.145	3.68	5.071	22.56	0.215	5.46	0.039	0.99	4.5	316 SS	CG	P
0.360	9.14	68563S	0.440	11.18	0.280	7.11	39.063	6.84	0.140	3.56	5.469	24.33	0.180	4.57	0.040	1.02	4.5	316 SS	CG	P
0.360	9.14	68564S	0.440	11.18	0.250	6.35	161.258	28.22	0.080	2.03	12.901	57.38	0.303	7.70	0.055	1.40	4.5	316 SS	C	P
0.360	9.14	68565S	0.470	11.94	0.276	7.01	48.382	8.47	0.127	3.23	6.145	27.33	0.189	4.80	0.042	1.07	4.5	316 SS	CG	P
0.360	9.14	68566S	0.470	11.94	0.284	7.21	26.023	4.55	0.180	4.57	4.684	20.83	0.190	4.83	0.038	0.97	5	316 SS	CG	P
0.360	9.14	68567S	0.500	12.70	0.284	7.21	26.023	4.55	0.180	4.57	4.684	20.83	0.190	4.83	0.038	0.97	5	316 SS	CG	P
0.360	9.14	68569S	0.500	12.70	0.265	6.73	69.505	12.16	0.124	3.15	8.619	38.34	0.238	6.05	0.048	1.21	5	316 SS	CG	P
0.360	9.14	68570S	0.500	12.70	0.265	6.73	59.575	10.43	0.145	3.68	8.638	38.42	0.261	6.63	0.048	1.21	5.5	316 SS	CG	P
0.360	9.14	68571S	0.500	12.70	0.278	7.06	36.270	6.35	0.162	4.12	5.876	26.14	0.205	5.21	0.041	1.04	5	316 SS	CG	P
0.360	9.14	68572S	0.500	12.70	0.276	7.01	30.239	5.29	0.204	5.18	6.169	27.44	0.294	7.47	0.042	1.07	6	316 SS	C	P
0.360	9.14	68573S	0.500	12.70	0.278	7.06	24.180	4.23	0.233	5.92	5.634	25.06	0.267	6.78	0.041	1.04	6.5	316 SS	CG	P
0.360	9.14	68574S	0.530	13.46	0.260	6.60	87.415	15.30	0.115	2.92	10.053	44.72	0.250	6.35	0.050	1.27	5	316 SS	CG	P
0.360	9.14	68575S	0.530	13.46	0.265	6.73	92.673	16.22	0.093	2.36	8.619	38.34	0.202	5.13	0.048	1.21	4.3	316 SS	CG	P
0.360	9.14	68576S	0.560	14.22	0.284	7.21	26.023	4.55	0.180	4.57	4.684	20.83	0.190	4.83	0.038	0.97	5	316 SS	CG	P
0.360	9.14	68577S	0.560	14.22	0.292	7.42	16.071	2.81	0.210	5.33	3.375	15.01	0.170	4.32	0.034	0.86	5	316 SS	CG	P
0.360	9.14	68578S	0.560	14.22	0.235	5.97	241.462	42.26	0.076	1.93	18.351	81.63	0.375	9.53	0.063	1.59	5	316 SS	C	P
0.360	9.14	68579S	0.590	14.99	0.265	6.73	41.703	7.30	0.207	5.26	8.633	38.40	0.333	8.46	0.048	1.21	7	316 SS	CG	P
0.360	9.14	68580S	0.630	16.00	0.296	7.52	12.381	2.17	0.229	5.82	2.835	12.61	0.192	4.88	0.032	0.81	5	316 SS	C	P
0.360	9.14	68581S	0.630	16.00	0.265	6.73	52.128	9.12	0.166	4.22	8.653	38.49	0.333	8.46	0.048	1.21	6	316 SS	C	P
0.360	9.14	68582S	0.630	16.00	0.280	7.11	35.511	6.21	0.154	3.91	5.469	24.33	0.230	5.84	0.040	1.02	4.8	316 SS	C	P
0.360	9.14	68583S	0.630	16.00	0.270	6.86	38.587	6.75	0.195	4.95	7.524	33.47	0.281	7.14	0.045	1.14	6.3	316 SS	CG	P
0.360	9.14	68584S	0.630	16.00	0.280	7.11	24.414	4.27	0.223	5.66	5.444	24.22	0.240	6.10	0.040	1.02	6	316 SS	CG	P
0.360	9.14	68585S	0.630	16.00	0.270	6.86	27.332	4.78	0.270	6.86	7.380	32.83	0.360	9.14	0.045	1.14	8	316 SS	CG	P
0.360	9.14	68586S	0.660	16.76	0.265	6.73	37.912	6.64	0.228	5.79	8.644	38.45	0.404	10.26	0.048	1.21	7.5	316 SS	C	P
0.360	9.14	68587S	0.660	16.76	0.284	7.21	19.517	3.42	0.241	6.12	4.704	20.92	0.228	5.79	0.038	0.97	6	316 SS	CG	P
0.360	9.14	68588S	0.690	17.53	0.270	6.86	40.999	7.18	0.184	4.67	7.544	33.56	0.315	8.00	0.045	1.14	6	316 SS	C	P
0.360	9.14	68589S	0.690	17.53	0.250	6.35	57.592	10.08	0.195	4.95	11.230	49.95	0.495	12.57	0.055	1.40	9	316 SS	CG	P
0.360	9.14	68590S	0.690	17.53	0.240	6.10	85.714	15.00	0.150	3.81	12.857	57.19	0.540	13.72	0.060	1.52	9	316 SS	CG	P
0.360	9.14	68592S	0.720	18.29	0.270	6.86	38.587	6.75	0.195	4.95	7.524	33.47	0.281	7.14	0.045	1.14	6.3	316 SS	CG	P
0.360	9.14	68593S	0.720	18.29	0.270	6.86	38.587	6.75	0.195	4.95	7.524	33.47	0.326	8.28	0.045	1.14	6.3	316 SS	C	P
0.360	9.14	68594S	0.750	19.05	0.270	6.86	32.799	5.74	0.230	5.84	7.544	33.56	0.315	8.00	0.045	1.14	7	316 SS	CG	P
0.360	9.14	68595S	0.750	19.05	0.260	6.60	43.707	7.65	0.229	5.82	10.009	44.52	0.400	10.16	0.05					




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg Max. Defl. Inches	Sugg Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish								
mm		mm	mm	N/mm	mm	N	mm	mm												
0.360	9.14	68617S	1.000	25.40	0.270	6.86	25.230	4.42	0.299	7.60	7.544	33.56	0.383	9.73	0.045	1.14	8.5	316 SS	CG	P
0.360	9.14	68618S	1.030	26.16	0.260	6.60	32.780	5.74	0.306	7.77	10.031	44.62	0.500	12.70	0.050	1.27	10	316 SS	CG	P
0.360	9.14	68619S	1.060	26.92	0.265	6.73	26.064	4.56	0.331	8.41	8.627	38.37	0.475	12.07	0.048	1.21	10	316 SS	CG	P
0.360	9.14	68620S	1.090	27.69	0.270	6.86	21.866	3.83	0.345	8.76	7.544	33.56	0.428	10.87	0.045	1.14	9.5	316 SS	CG	P
0.360	9.14	68621S	1.130	28.70	0.278	7.06	12.090	2.12	0.485	12.32	5.864	26.08	0.492	12.50	0.041	1.04	11	316 SS	C	P
0.360	9.14	68622S	1.130	28.70	0.296	7.52	6.753	1.18	0.419	10.64	2.830	12.59	0.240	6.10	0.032	0.81	7.5	316 SS	CG	P
0.360	9.14	68623S	1.190	30.23	0.270	6.86	12.615	2.21	0.470	11.94	5.929	26.37	0.720	18.29	0.045	1.14	15	316 SS	C	P
0.360	9.14	68624S	1.190	30.23	0.292	7.42	4.383	0.77	0.714	18.14	3.129	13.92	0.476	12.09	0.034	0.86	13	316 SS	C	P
0.360	9.14	68625S	1.250	31.75	0.284	7.21	7.807	1.37	0.601	15.27	4.692	20.87	0.494	12.55	0.038	0.97	12	316 SS	C	P
0.360	9.14	68626S	1.310	33.27	0.274	6.96	15.783	2.76	0.419	10.64	6.613	29.42	0.452	11.48	0.043	1.09	10.5	316 SS	CG	P
0.360	9.14	68627S	1.310	33.27	0.270	6.86	18.222	3.19	0.414	10.52	7.544	33.56	0.540	13.72	0.045	1.14	11	316 SS	C	P
0.360	9.14	68628S	1.310	33.27	0.276	7.01	14.573	2.55	0.423	10.74	6.164	27.42	0.475	12.07	0.042	1.07	10.3	316 SS	C	P
0.360	9.14	68629S	1.310	33.27	0.250	6.35	44.794	7.84	0.289	7.34	12.945	57.58	0.605	15.37	0.055	1.40	11	316 SS	CG	P
0.360	9.14	68630S	1.340	34.04	0.235	5.97	65.853	11.52	0.277	7.04	18.241	81.14	0.875	22.23	0.063	1.59	13	316 SS	C	P
0.360	9.14	68631S	1.380	35.05	0.270	6.86	16.399	2.87	0.460	11.68	7.544	33.56	0.585	14.86	0.045	1.14	12	316 SS	C	P
0.360	9.14	68632S	1.380	35.05	0.284	7.21	11.153	1.95	0.421	10.69	4.695	20.88	0.380	9.65	0.038	0.97	9	316 SS	C	P
0.360	9.14	68633S	1.380	35.05	0.292	7.42	6.429	1.13	0.526	13.36	3.382	15.04	0.323	8.20	0.034	0.86	9.5	316 SS	CG	P
0.360	9.14	68634S	1.380	35.05	0.258	6.55	22.930	4.01	0.464	11.79	10.640	47.33	0.740	18.80	0.051	1.30	14.5	316 SS	CG	P
0.360	9.14	68635S	1.440	36.58	0.258	6.55	22.048	3.86	0.482	12.24	10.627	47.27	0.765	19.43	0.051	1.30	15	316 SS	CG	P
0.360	9.14	68636S	1.440	36.58	0.244	6.20	68.476	11.98	0.220	5.59	15.065	67.01	0.609	15.47	0.058	1.47	9.5	316 SS	C	P
0.360	9.14	68637S	1.470	37.34	0.278	7.06	9.221	1.61	0.636	16.15	5.865	26.09	0.607	15.42	0.041	1.04	13.8	316 SS	C	P
0.360	9.14	68638S	1.470	37.34	0.235	5.97	60.365	10.56	0.302	7.67	18.230	81.09	0.875	22.23	0.063	1.59	14	316 SS	CG	P
0.360	9.14	68639S	1.500	38.10	0.284	7.21	8.394	1.47	0.559	14.20	4.692	20.87	0.429	10.90	0.038	0.97	11.3	316 SS	CG	P
0.360	9.14	68640S	1.500	38.10	0.296	7.52	2.597	0.45	0.978	24.84	2.540	11.30	0.522	13.26	0.032	0.81	16.3	316 SS	CG	P
0.360	9.14	68641S	1.530	38.86	0.270	6.86	14.909	2.61	0.506	12.85	7.544	33.56	0.630	16.00	0.045	1.14	13	316 SS	C	P
0.360	9.14	68642S	1.630	41.40	0.250	6.35	40.314	7.06	0.321	8.15	12.941	57.56	0.660	16.76	0.055	1.40	12	316 SS	CG	P
0.360	9.14	68643S	1.690	42.93	0.265	6.73	26.064	4.56	0.331	8.41	8.627	38.37	0.523	13.28	0.048	1.21	10	316 SS	C	P
0.360	9.14	68644S	1.690	42.93	0.270	6.86	10.933	1.91	0.690	17.53	7.544	33.56	0.765	19.43	0.045	1.14	17	316 SS	CG	P
0.360	9.14	68645S	1.750	44.45	0.270	6.86	9.371	1.64	0.805	20.45	7.544	33.56	0.923	23.44	0.045	1.14	19.5	316 SS	C	P
0.360	9.14	68646S	1.750	44.45	0.265	6.73	13.032	2.28	0.663	16.84	8.640	38.43	0.903	22.94	0.048	1.21	18	316 SS	C	P
0.360	9.14	68647S	1.780	45.21	0.290	7.37	4.269	0.75	0.863	21.92	3.684	16.39	0.553	14.05	0.035	0.89	14.8	316 SS	C	P
0.360	9.14	68648S	1.810	45.97	0.280	7.11	9.766	1.71	0.559	14.20	5.459	24.28	0.520	13.21	0.040	1.02	12	316 SS	C	P
0.360	9.14	68649S	1.880	47.75	0.250	6.35	22.649	3.96	0.570	14.48	12.910	57.42	1.089	27.66	0.055	1.40	19.8	316 SS	CG	P
0.360	9.14	68650S	1.940	49.28	0.288	7.32	3.249	0.57	1.184	30.07	3.847	17.11	0.756	19.20	0.036	0.91	21	316 SS	CG	P
0.360	9.14	68651S	2.030	51.56	0.244	6.20	36.684	6.42	0.411	10.44	15.077	67.06	0.986	25.04	0.058	1.47	16	316 SS	C	P
0.360	9.14	68652S	2.060	52.32	0.278	7.06	9.068	1.59	0.647	16.43	5.867	26.10	0.574	14.58	0.041	1.04	14	316 SS	CG	P
0.360	9.14	68653S	2.250	57.15	0.265	6.73	18.132	3.17	0.476	12.09	8.631	38.39	0.641	16.28	0.048	1.21	13.5	316 SS	CG	P
0.360	9.14	68654S	2.280	57.91	0.270	6.86	9.647	1.69	0.782	19.86	7.544	33.56	0.900	22.86	0.045	1.14	19	316 SS	C	P
0.360	9.14	68655S	2.500	63.50	0.260	6.60	13.112	2.30	0.765	19.43	10.031	44.62	1.100	27.94	0.050	1.27	22	316 SS	CG	P
0.360	9.14	68656S	2.500	63.50	0.265	6.73	8.341	1.46	1.035	26.29	8.633	38.40	1.283	32.59	0.048	1.21	27	316 SS	CG	P
0.360	9.14	61517S	0.500	12.70	0.308	7.82	7.500	1.31	0.204	5.17	1.530	6.80	0.108	2.74	0.026	0.66	4	316 SS	CG	P
0.360	9.14	61518S	0.560	14.30	0.308	7.82	6.700	1.17	0.228	5.79	1.528	6.79	0.115	2.92	0.026	0.66	4.3	316 SS	CG	P
0.360	9.14	61519S	0.630	15.88	0.308	7.82	5.800	1.02	0.263	6.68	1.525	6.78	0.124	3.15	0.026	0.66	4.6	316 SS	CG	P
0.360	9.14	61520S	0.690	17.48	0.308	7.82	5.400	0.95	0.283	7.18	1.528	6.79	0.131	3.33	0.026	0.66	4.8	316 SS	CG	P
0.360	9.14	61521S	0.750	19.05	0.308	7.82	5.000	0.88	0.306	7.75	1.530	6.80	0.138	3.51	0.026	0.66	5.1	316 SS	CG	P
0.360	9.14	61522S	0.810	20.65	0.308	7.82	4.600	0.81	0.332	8.42	1.527	6.79	0.144	3.66	0.026	0.66	5.3	316 SS	CG	P
0.360	9.14	61523S	0.880	22.23	0.308	7.82	4.200	0.74	0.364	9.23	1.529	6.80	0.151	3.84	0.026	0.66	5.7	316 SS	CG	P
0.360	9.14	61524S	0.940	23.83	0.308	7.82	3.700	0.65	0.413	10.48	1.528	6.79	0.157	3.99	0.026	0.66	6.1	316 SS	CG	P
0.360	9.14	61525S	1.000	25.40	0.308	7.82	3.300	0.58	0.463	11.75	1.528	6.79	0.170	4.32	0.026	0.66	6.7	316 SS	CG	P
0.360	9.14	61526S	1.130	28.58	0.308	7.82	2.900	0.51	0.527	13.37	1.528	6.79	0.190	4.83	0.026	0.66	7.3	316 SS	CG	P
0.360	9.14	61527S	1.250	31.75	0.308	7.82	2.700	0.47	0.566	14.36	1.528	6.79	0.210	5.33	0.026	0.66	7.7	316 SS	CG	P
0.360	9.14	61528S	1.500	38.10	0.308	7.82	2.200	0.39	0.695	17.64	1.529	6.80	0.239	6.07	0.026	0.66	9	316 SS	CG	P
0.360	9.14	61529S	1.750	44.45	0.308	7.82	2.000	0.35	0.764	19.40	1.528	6.79	0.250	6.35	0.026	0.66	9.7	316 SS	CG	P
0.360	9.1																			




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Ends Mat'l	Finish CG									
0.360	9.14	61732S	0.750	19.05	0.296	7.52	10.000	1.75	0.280	7.11	2.800	12.44	0.185	4.70	0.032	0.81	5.7	316 SS	CG	P
0.360	9.14	61733S	0.810	20.65	0.296	7.52	9.200	1.61	0.304	7.73	2.797	12.43	0.201	5.11	0.032	0.81	6	316 SS	CG	P
0.360	9.14	61734S	0.880	22.23	0.296	7.52	8.300	1.45	0.337	8.56	2.797	12.43	0.209	5.31	0.032	0.81	6.5	316 SS	CG	P
0.360	9.14	61735S	0.940	23.83	0.296	7.52	7.900	1.38	0.354	8.99	2.797	12.43	0.225	5.72	0.032	0.81	6.7	316 SS	CG	P
0.360	9.14	61736S	1.000	25.40	0.296	7.52	7.100	1.24	0.394	10.01	2.797	12.43	0.241	6.12	0.032	0.81	7.2	316 SS	CG	P
0.360	9.14	61737S	1.130	28.58	0.296	7.52	6.200	1.09	0.452	11.46	2.802	12.45	0.265	6.73	0.032	0.81	8	316 SS	CG	P
0.360	9.14	61738S	1.250	31.75	0.296	7.52	5.800	1.02	0.483	12.25	2.801	12.45	0.277	7.04	0.032	0.81	8.4	316 SS	CG	P
0.360	9.14	61739S	1.380	34.93	0.296	7.52	5.420	0.95	0.517	13.12	2.802	12.45	0.297	7.54	0.032	0.81	8.9	316 SS	CG	P
0.360	9.14	61740S	1.500	38.10	0.296	7.52	4.600	0.81	0.609	15.44	2.801	12.45	0.338	8.59	0.032	0.81	10.1	316 SS	CG	P
0.360	9.14	61741S	1.750	44.45	0.296	7.52	3.800	0.67	0.737	18.69	2.801	12.45	0.381	9.68	0.032	0.81	11.8	316 SS	CG	P
0.360	9.14	61742S	2.000	50.80	0.296	7.52	3.300	0.58	0.848	21.53	2.798	12.44	0.421	10.69	0.032	0.81	13.3	316 SS	CG	P
0.360	9.14	61743S	2.250	57.15	0.296	7.52	3.000	0.53	0.933	23.71	2.799	12.44	0.471	11.96	0.032	0.81	14.4	316 SS	CG	P
0.360	9.14	61744S	2.500	63.50	0.296	7.52	2.700	0.47	1.037	26.31	2.800	12.44	0.514	13.06	0.032	0.81	15.8	316 SS	CG	P
0.360	9.14	61838S	0.440	11.13	0.290	7.36	23.200	4.06	0.159	4.05	3.689	16.40	0.164	4.17	0.035	0.89	4.4	316 SS	CG	P
0.360	9.14	61839S	0.500	12.70	0.290	7.36	19.700	3.45	0.188	4.76	3.704	16.46	0.178	4.52	0.035	0.89	4.8	316 SS	CG	P
0.360	9.14	61840S	0.560	14.30	0.290	7.36	16.900	2.96	0.219	5.55	3.701	16.45	0.194	4.93	0.035	0.89	5.2	316 SS	CG	P
0.360	9.14	61841S	0.630	15.88	0.290	7.36	15.000	2.63	0.247	6.26	3.705	16.47	0.208	5.28	0.035	0.89	5.6	316 SS	CG	P
0.360	9.14	61842S	0.690	17.48	0.290	7.36	13.300	2.33	0.278	7.06	3.697	16.43	0.223	5.66	0.035	0.89	6.1	316 SS	CG	P
0.360	9.14	61843S	0.750	19.05	0.290	7.36	12.200	2.14	0.303	7.69	3.697	16.43	0.238	6.05	0.035	0.89	6.5	316 SS	CG	P
0.360	9.14	61844S	0.810	20.65	0.290	7.36	11.100	1.94	0.333	8.46	3.696	16.43	0.252	6.40	0.035	0.89	6.9	316 SS	CG	P
0.360	9.14	61845S	0.880	22.23	0.290	7.36	10.400	1.82	0.356	9.03	3.702	16.45	0.266	6.76	0.035	0.89	7.3	316 SS	CG	P
0.360	9.14	61846S	0.940	23.83	0.290	7.36	9.700	1.70	0.381	9.68	3.696	16.43	0.279	7.09	0.035	0.89	7.6	316 SS	CG	P
0.360	9.14	61847S	1.000	25.40	0.290	7.36	9.200	1.61	0.402	10.20	3.698	16.44	0.293	7.44	0.035	0.89	7.9	316 SS	CG	P
0.360	9.14	61848S	1.130	28.58	0.290	7.36	7.900	1.38	0.468	11.88	3.697	16.43	0.325	8.26	0.035	0.89	8.9	316 SS	CG	P
0.360	9.14	61849S	1.250	31.75	0.290	7.36	7.200	1.26	0.514	13.04	3.701	16.45	0.351	8.92	0.035	0.89	9.6	316 SS	CG	P
0.360	9.14	61850S	1.380	34.93	0.290	7.36	6.400	1.12	0.578	14.66	3.699	16.44	0.381	9.68	0.035	0.89	10.5	316 SS	CG	P
0.360	9.14	61851S	1.500	38.10	0.290	7.36	5.800	1.02	0.638	16.18	3.700	16.44	0.410	10.41	0.035	0.89	11.4	316 SS	CG	P
0.360	9.14	61852S	1.750	44.45	0.290	7.36	5.100	0.89	0.725	18.41	3.698	16.44	0.465	11.81	0.035	0.89	12.7	316 SS	CG	P
0.360	9.14	61853S	2.000	50.80	0.290	7.36	4.300	0.75	0.860	21.83	3.698	16.44	0.525	13.34	0.035	0.89	14.7	316 SS	CG	P
0.360	9.14	61854S	2.250	57.15	0.290	7.36	3.800	0.67	0.973	24.68	3.697	16.43	0.580	14.73	0.035	0.89	16.4	316 SS	CG	P
0.360	9.14	61855S	2.500	63.50	0.290	7.36	3.400	0.60	1.088	27.63	3.699	16.44	0.640	16.26	0.035	0.89	18.1	316 SS	CG	P
0.360	9.14	61921S	0.440	11.13	0.284	7.20	31.700	5.55	0.150	3.82	4.755	21.13	0.172	4.37	0.038	0.97	4.5	316 SS	CG	P
0.360	9.14	61922S	0.500	12.70	0.284	7.20	26.700	4.68	0.179	4.53	4.779	21.24	0.191	4.85	0.038	0.97	4.9	316 SS	CG	P
0.360	9.14	61923S	0.560	14.30	0.284	7.20	23.300	4.08	0.205	5.19	4.777	21.23	0.200	5.08	0.038	0.97	5.4	316 SS	CG	P
0.360	9.14	61924S	0.630	15.88	0.284	7.20	20.800	3.64	0.229	5.81	4.763	21.17	0.219	5.56	0.038	0.97	5.8	316 SS	CG	P
0.360	9.14	61925S	0.690	17.48	0.284	7.20	18.300	3.21	0.260	6.61	4.758	21.15	0.239	6.07	0.038	0.97	6.3	316 SS	CG	P
0.360	9.14	61926S	0.750	19.05	0.284	7.20	17.500	3.07	0.272	6.91	4.760	21.16	0.248	6.30	0.038	0.97	6.5	316 SS	CG	P
0.360	9.14	61927S	0.810	20.65	0.284	7.20	15.800	2.77	0.302	7.66	4.772	21.21	0.267	6.78	0.038	0.97	6.9	316 SS	CG	P
0.360	9.14	61928S	0.880	22.23	0.284	7.20	14.200	2.49	0.338	8.52	4.771	21.20	0.286	7.26	0.038	0.97	7.5	316 SS	CG	P
0.360	9.14	61929S	0.940	23.83	0.284	7.20	13.300	2.33	0.358	9.10	4.761	21.16	0.305	7.75	0.038	0.97	7.9	316 SS	CG	P
0.360	9.14	61930S	1.000	25.40	0.284	7.20	12.500	2.19	0.381	9.68	4.763	21.17	0.324	8.23	0.038	0.97	8.3	316 SS	CG	P
0.360	9.14	61931S	1.130	28.58	0.284	7.20	10.800	1.89	0.441	11.20	4.763	21.17	0.352	8.94	0.038	0.97	9.2	316 SS	CG	P
0.360	9.14	61932S	1.250	31.75	0.284	7.20	10.000	1.75	0.477	12.10	4.770	21.20	0.381	9.68	0.038	0.97	9.8	316 SS	CG	P
0.360	9.14	61933S	1.380	34.93	0.284	7.20	8.300	1.45	0.574	14.57	4.764	21.17	0.438	11.13	0.038	0.97	11.4	316 SS	CG	P
0.360	9.14	61934S	1.500	38.10	0.284	7.20	7.500	1.31	0.635	16.13	4.763	21.17	0.477	12.12	0.038	0.97	12.4	316 SS	CG	P
0.360	9.14	61935S	1.750	44.45	0.284	7.20	6.800	1.19	0.701	17.79	4.767	21.19	0.518	13.16	0.038	0.97	13.5	316 SS	CG	P
0.360	9.14	61936S	2.000	50.80	0.284	7.20	6.200	1.09	0.769	19.51	4.768	21.19	0.575	14.61	0.038	0.97	14.6	316 SS	CG	P
0.360	9.14	61937S	2.250	57.15	0.284	7.20	5.400	0.95	0.883	22.39	4.768	21.19	0.632	16.05	0.038	0.97	16.5	316 SS	CG	P
0.360	9.14	61938S	2.500	63.50	0.284	7.20	4.800	0.84	0.993	25.19	4.766	21.18	0.714	18.14	0.038	0.97	18.3	316 SS	CG	P
0.360	9.14	61989S	0.440	11.13	0.280	7.10	36.800	6.45	0.150	3.81	5.520	24.53	0.196	4.98	0.040	1.02	4.7	316 SS	CG	P
0.360	9.14	61990S	0.500	12.70	0.280	7.10	31.800	5.57	0.174	4.41	5.533	24.59	0.214	5.44	0.040	1.02	5.1	316 SS	CG	P
0.360	9.14	61991S	0.560	14.30	0.280	7.10	27.500	4.82	0.201	5.10	5.528	24.57	0.234	5.94	0.040	1.02	5.6	316 SS	CG	P
0.360	9.14	61992S	0.630	15.88	0.280	7.10	23.800	4.17	0.232	5.89	5.522	24.54	0.254	6.45	0.040	1.02	6.1	316 SS	CG	P
0.360	9.14	61993S	0.690	17.48	0.280	7.10	21.800	3.82	0.253	6.43	5.515									




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg Max. Defl. Inches	Sugg Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish								
mm		mm	mm	N/mm	mm	N	mm	mm												
0.360	9.14	62053S	0.940	23.83	0.276	7.00	19.200	3.36	0.324	8.22	6.221	27.65	0.359	9.12	0.042	1.07	8.3	316 SS	CG	P
0.360	9.14	62054S	1.000	25.40	0.276	7.00	17.500	3.07	0.355	9.02	6.213	27.61	0.379	9.63	0.042	1.07	8.9	316 SS	CG	P
0.360	9.14	62055S	1.130	28.58	0.276	7.00	15.800	2.77	0.394	9.99	6.225	27.67	0.411	10.44	0.042	1.07	9.7	316 SS	CG	P
0.360	9.14	62056S	1.250	31.75	0.276	7.00	14.200	2.49	0.438	11.12	6.220	27.64	0.453	11.51	0.042	1.07	10.5	316 SS	CG	P
0.360	9.14	62057S	1.380	34.93	0.276	7.00	13.300	2.33	0.468	11.87	6.224	27.66	0.485	12.32	0.042	1.07	11.1	316 SS	CG	P
0.360	9.14	62058S	1.500	38.10	0.276	7.00	12.100	2.12	0.514	13.05	6.219	27.64	0.527	13.39	0.042	1.07	12	316 SS	CG	P
0.360	9.14	62059S	1.750	44.45	0.276	7.00	10.000	1.75	0.622	15.79	6.220	27.64	0.614	15.60	0.042	1.07	14.1	316 SS	CG	P
0.360	9.14	62060S	2.000	50.80	0.276	7.00	8.700	1.52	0.715	18.14	6.221	27.65	0.677	17.20	0.042	1.07	15.9	316 SS	CG	P
0.360	9.14	62061S	2.250	57.15	0.276	7.00	7.500	1.31	0.829	21.06	6.218	27.64	0.769	19.53	0.042	1.07	18.1	316 SS	CG	P
0.360	9.14	62062S	2.500	63.50	0.276	7.00	6.900	1.21	0.902	22.89	6.224	27.66	0.850	21.59	0.042	1.07	19.5	316 SS	CG	P
0.360	9.14	62126S	0.440	11.13	0.270	6.86	62.500	10.95	0.120	3.04	7.500	33.33	0.215	5.46	0.045	1.14	4.6	316 SS	CG	P
0.360	9.14	62127S	0.500	12.70	0.270	6.86	54.100	9.48	0.138	3.51	7.466	33.18	0.232	5.89	0.045	1.14	5	316 SS	CG	P
0.360	9.14	62128S	0.560	14.30	0.270	6.86	45.800	8.02	0.163	4.15	7.465	33.18	0.260	6.60	0.045	1.14	5.6	316 SS	CG	P
0.360	9.14	62129S	0.630	15.88	0.270	6.86	40.800	7.15	0.183	4.66	7.466	33.18	0.271	6.88	0.045	1.14	6	316 SS	CG	P
0.360	9.14	62130S	0.690	17.48	0.270	6.86	36.700	6.43	0.204	5.18	7.487	33.28	0.294	7.47	0.045	1.14	6.5	316 SS	CG	P
0.360	9.14	62131S	0.750	19.05	0.270	6.86	33.300	5.83	0.225	5.70	7.493	33.30	0.316	8.03	0.045	1.14	6.9	316 SS	CG	P
0.360	9.14	62132S	0.810	20.65	0.270	6.86	30.800	5.39	0.243	6.17	7.484	33.26	0.339	8.61	0.045	1.14	7.3	316 SS	CG	P
0.360	9.14	62133S	0.880	22.23	0.270	6.86	27.500	4.82	0.272	6.91	7.480	33.24	0.361	9.17	0.045	1.14	8	316 SS	CG	P
0.360	9.14	62134S	0.940	23.83	0.270	6.86	25.000	4.38	0.299	7.60	7.475	33.22	0.395	10.03	0.045	1.14	8.6	316 SS	CG	P
0.360	9.14	62135S	1.000	25.40	0.270	6.86	23.300	4.08	0.321	8.15	7.479	33.24	0.417	10.59	0.045	1.14	9	316 SS	CG	P
0.360	9.14	62136S	1.130	28.58	0.270	6.86	20.800	3.64	0.360	9.13	7.488	33.28	0.451	11.46	0.045	1.14	9.9	316 SS	CG	P
0.360	9.14	62137S	1.250	31.75	0.270	6.86	18.300	3.21	0.409	10.38	7.485	33.27	0.512	13.00	0.045	1.14	11	316 SS	CG	P
0.360	9.14	62138S	1.380	34.93	0.270	6.86	16.700	2.93	0.448	11.37	7.482	33.25	0.541	13.74	0.045	1.14	11.8	316 SS	CG	P
0.360	9.14	62139S	1.500	38.10	0.270	6.86	15.000	2.63	0.499	12.66	7.485	33.27	0.586	14.88	0.045	1.14	12.9	316 SS	CG	P
0.360	9.14	62140S	1.750	44.45	0.270	6.86	12.900	2.26	0.580	14.73	7.482	33.25	0.681	17.30	0.045	1.14	14.7	316 SS	CG	P
0.360	9.14	62141S	2.000	50.80	0.270	6.86	11.100	1.94	0.674	17.11	7.481	33.25	0.762	19.35	0.045	1.14	16.8	316 SS	CG	P
0.360	9.14	62142S	2.250	57.15	0.270	6.86	9.800	1.72	0.764	19.39	7.487	33.28	0.851	21.62	0.045	1.14	18.7	316 SS	CG	P
0.360	9.14	62143S	2.500	63.50	0.270	6.86	8.800	1.54	0.851	21.59	7.489	33.28	0.945	24.00	0.045	1.14	20.6	316 SS	CG	P
0.360	9.14	62144S	2.750	69.85	0.270	6.86	7.800	1.37	0.960	24.35	7.488	33.28	1.045	26.54	0.045	1.14	23	316 SS	CG	P
0.360	9.14	62198S	0.440	11.13	0.266	6.76	77.470	13.57	0.110	2.78	8.522	37.88	0.221	5.61	0.047	1.19	4.6	316 SS	CG	P
0.360	9.14	62199S	0.500	12.70	0.266	6.76	65.670	11.50	0.129	3.28	8.471	37.65	0.243	6.17	0.047	1.19	5	316 SS	CG	P
0.360	9.14	62200S	0.560	14.30	0.266	6.76	56.810	9.95	0.149	3.79	8.465	37.62	0.266	6.76	0.047	1.19	5.5	316 SS	CG	P
0.360	9.14	62201S	0.630	15.88	0.266	6.76	50.150	8.78	0.169	4.29	8.475	37.67	0.289	7.33	0.047	1.19	6	316 SS	CG	P
0.360	9.14	62202S	0.690	17.48	0.266	6.76	44.820	7.85	0.189	4.80	8.470	37.64	0.311	7.91	0.047	1.19	6.4	316 SS	CG	P
0.360	9.14	62203S	0.750	19.05	0.266	6.76	40.650	7.12	0.209	5.30	8.496	37.76	0.334	8.48	0.047	1.19	6.9	316 SS	CG	P
0.360	9.14	62204S	0.810	20.65	0.266	6.76	37.070	6.49	0.229	5.81	8.489	37.73	0.357	9.06	0.047	1.19	7.4	316 SS	CG	P
0.360	9.14	62205S	0.880	22.23	0.266	6.76	34.150	5.98	0.248	6.31	8.470	37.64	0.379	9.63	0.047	1.19	7.8	316 SS	CG	P
0.360	9.14	62206S	0.940	23.83	0.266	6.76	31.570	5.53	0.269	6.82	8.493	37.75	0.402	10.20	0.047	1.19	8.3	316 SS	CG	P
0.360	9.14	62207S	1.000	25.40	0.266	6.76	29.420	5.15	0.288	7.32	8.472	37.65	0.424	10.77	0.047	1.19	8.8	316 SS	CG	P
0.360	9.14	62208S	1.130	28.58	0.266	6.76	25.820	4.52	0.329	8.34	8.496	37.76	0.469	11.92	0.047	1.19	9.7	316 SS	CG	P
0.360	9.14	62209S	1.250	31.75	0.266	6.76	23.080	4.04	0.368	9.33	8.495	37.76	0.514	13.06	0.047	1.19	10.6	316 SS	CG	P
0.360	9.14	62210S	1.380	34.93	0.266	6.76	20.830	3.65	0.407	10.34	8.476	37.67	0.560	14.21	0.047	1.19	11.6	316 SS	CG	P
0.360	9.14	62211S	1.500	38.10	0.266	6.76	18.910	3.31	0.449	11.39	8.490	37.73	0.605	15.36	0.047	1.19	12.5	316 SS	CG	P
0.360	9.14	62212S	1.750	44.45	0.266	6.76	16.080	2.82	0.528	13.39	8.489	37.73	0.695	17.65	0.047	1.19	14.4	316 SS	CG	P
0.360	9.14	62213S	2.000	50.80	0.266	6.76	13.990	2.45	0.606	15.39	8.480	37.69	0.785	19.95	0.047	1.19	16.2	316 SS	CG	P
0.360	9.14	62214S	2.250	57.15	0.266	6.76	12.330	2.16	0.688	17.47	8.482	37.70	0.876	22.24	0.047	1.19	18.1	316 SS	CG	P
0.360	9.14	62215S	2.500	63.50	0.266	6.76	11.080	1.94	0.766	19.44	8.487	37.72	0.966	24.54	0.047	1.19	20	316 SS	CG	P
0.360	9.14	62216S	2.750	69.85	0.266	6.76	10.000	1.75	0.849	21.54	8.487	37.72	1.056	26.83	0.047	1.19	21.8	316 SS	CG	P
0.360	9.14	62217S	3.000	76.20	0.266	6.76	9.160	1.61	0.926	23.50	8.485	37.71	1.147	29.13	0.047	1.19	23.7	316 SS	CG	P
0.360	9.14	62218S	3.250	82.55	0.266	6.76	58.600	10.26	0.171	4.35	10.021	44.54	0.324	8.23	0.050	1.27	6.5	316 SS	CG	P
0.360	9.14	62269S	0.690	17.48	0.260	6.60	52.400	9.18	0.192	4.86	10.061	44.72	0.350	8.89	0.050	1.27	7	316 SS	CG	P
0.360	9.14	62270S	0.750	19.05	0.260	6.60	47.400	8.30	0.212	5.37	10.049	44.66	0.377	9.58	0.050	1.27	7.5	316 SS	CG	P
0.360	9.14	62271S	0.810	20.65	0.260	6.60	43.300	7.58	0.232	5.88	10.046	44.65	0.403	10.24	0.050	1.2				




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	EN ds	FIN sh							
									Mat'l									
0.360	9.14	62308S	0.630	15.88	0.258	6.54	68.300	11.96	0.157	3.99	10.723	47.66	0.325	8.26	0.051	1.30	6.2	316 SS CG P
0.360	9.14	62309S	0.690	17.48	0.258	6.54	61.100	10.70	0.176	4.46	10.754	47.80	0.351	8.92	0.051	1.30	6.7	316 SS CG P
0.360	9.14	62310S	0.750	19.05	0.258	6.54	55.200	9.67	0.195	4.94	10.764	47.84	0.377	9.58	0.051	1.30	7.2	316 SS CG P
0.360	9.14	62311S	0.810	20.65	0.258	6.54	50.300	8.81	0.214	5.42	10.764	47.84	0.403	10.24	0.051	1.30	7.7	316 SS CG P
0.360	9.14	62312S	0.880	22.23	0.258	6.54	46.200	8.09	0.233	5.90	10.765	47.84	0.430	10.92	0.051	1.30	8.2	316 SS CG P
0.360	9.14	62313S	1.000	25.40	0.258	6.54	39.800	6.97	0.270	6.85	10.746	47.76	0.482	12.24	0.051	1.30	9.2	316 SS CG P
0.360	9.14	62314S	1.130	28.58	0.258	6.54	34.900	6.11	0.308	7.81	10.749	47.77	0.535	13.59	0.051	1.30	10.2	316 SS CG P
0.360	9.14	62315S	1.250	31.75	0.258	6.54	31.100	5.45	0.345	8.77	10.730	47.69	0.587	14.91	0.051	1.30	11.2	316 SS CG P
0.360	9.14	62316S	1.380	34.93	0.258	6.54	28.100	4.92	0.382	9.70	10.734	47.71	0.640	16.26	0.051	1.30	12.2	316 SS CG P
0.360	9.14	62317S	1.500	38.10	0.258	6.54	25.600	4.48	0.420	10.65	10.752	47.79	0.693	17.60	0.051	1.30	13.2	316 SS CG P
0.360	9.14	62318S	1.750	44.45	0.258	6.54	21.700	3.80	0.495	12.57	10.742	47.74	0.798	20.27	0.051	1.30	15.2	316 SS CG P
0.360	9.14	62319S	2.000	50.80	0.258	6.54	18.800	3.29	0.571	14.50	10.735	47.71	0.903	22.94	0.051	1.30	17.3	316 SS CG P
0.360	9.14	62320S	2.250	57.15	0.258	6.54	16.600	2.91	0.647	16.42	10.740	47.73	1.008	25.60	0.051	1.30	19.3	316 SS CG P
0.360	9.14	62321S	2.500	63.50	0.258	6.54	14.900	2.61	0.721	18.30	10.743	47.75	1.113	28.27	0.051	1.30	21.2	316 SS CG P
0.360	9.14	62322S	2.750	69.85	0.258	6.54	13.500	2.36	0.796	20.20	10.746	47.76	1.218	30.94	0.051	1.30	23.2	316 SS CG P
0.360	9.14	62323S	3.000	76.20	0.258	6.54	12.300	2.15	0.873	22.17	10.738	47.72	1.323	33.60	0.051	1.30	25.3	316 SS CG P
0.360	9.14	62324S	3.250	82.55	0.258	6.54	11.330	1.99	0.948	24.05	10.744	47.75	1.434	36.42	0.051	1.30	27.3	316 SS CG P
0.360	9.14	62325S	3.500	88.90	0.258	6.54	10.500	1.84	1.023	25.96	10.742	47.74	1.539	39.09	0.051	1.30	29.3	316 SS CG P
0.360	9.14	62327S	0.440	11.13	0.250	6.34	145.700	25.52	0.089	2.27	12.967	57.63	0.270	6.86	0.055	1.40	4.8	316 SS CG P
0.360	9.14	62328S	0.500	12.70	0.250	6.34	122.500	21.45	0.106	2.70	12.985	57.71	0.300	7.62	0.055	1.40	5.3	316 SS CG P
0.360	9.14	62329S	0.560	14.30	0.250	6.34	105.700	18.51	0.123	3.13	13.001	57.78	0.329	8.36	0.055	1.40	5.8	316 SS CG P
0.360	9.14	62340S	0.630	15.88	0.250	6.34	92.800	16.25	0.140	3.56	12.992	57.74	0.359	9.12	0.055	1.40	6.3	316 SS CG P
0.360	9.14	62341S	0.690	17.48	0.250	6.34	82.800	14.50	0.157	3.99	13.000	57.78	0.389	9.88	0.055	1.40	6.9	316 SS CG P
0.360	9.14	62342S	0.750	19.05	0.250	6.34	74.600	13.07	0.175	4.43	13.055	58.02	0.419	10.64	0.055	1.40	7.4	316 SS CG P
0.360	9.14	62343S	0.810	20.65	0.250	6.34	68.100	11.93	0.191	4.85	13.007	57.81	0.449	11.40	0.055	1.40	7.9	316 SS CG P
0.360	9.14	62344S	0.880	22.23	0.250	6.34	62.500	10.95	0.208	5.29	13.000	57.78	0.479	12.17	0.055	1.40	8.5	316 SS CG P
0.360	9.14	62345S	1.000	25.40	0.250	6.34	53.700	9.41	0.242	6.15	12.995	57.76	0.539	13.69	0.055	1.40	9.5	316 SS CG P
0.360	9.14	62346S	1.130	28.58	0.250	6.34	47.100	8.25	0.276	7.01	13.000	57.78	0.598	15.19	0.055	1.40	10.6	316 SS CG P
0.360	9.14	62347S	1.250	31.75	0.250	6.34	41.900	7.34	0.311	7.89	13.031	57.92	0.658	16.71	0.055	1.40	11.6	316 SS CG P
0.360	9.14	62348S	1.380	34.93	0.250	6.34	37.800	6.62	0.344	8.74	13.003	57.79	0.718	18.24	0.055	1.40	12.7	316 SS CG P
0.360	9.14	62349S	1.500	38.10	0.250	6.34	34.400	6.03	0.378	9.60	13.003	57.79	0.778	19.76	0.055	1.40	13.7	316 SS CG P
0.360	9.14	62350S	1.750	44.45	0.250	6.34	29.200	5.11	0.446	11.31	13.023	57.88	0.897	22.78	0.055	1.40	15.8	316 SS CG P
0.360	9.14	62351S	2.000	50.80	0.250	6.34	25.300	4.43	0.515	13.06	13.030	57.91	1.017	25.83	0.055	1.40	17.9	316 SS CG P
0.360	9.14	62352S	2.250	57.15	0.250	6.34	22.300	3.91	0.584	14.82	13.023	57.88	1.136	28.85	0.055	1.40	20.1	316 SS CG P
0.360	9.14	62353S	2.500	63.50	0.250	6.34	20.000	3.50	0.651	16.52	13.020	57.87	1.255	31.88	0.055	1.40	22.2	316 SS CG P
0.360	9.14	62354S	2.750	69.85	0.250	6.34	18.100	3.17	0.719	18.25	13.014	57.84	1.375	34.93	0.055	1.40	24.3	316 SS CG P
0.360	9.14	62355S	3.000	76.20	0.250	6.34	16.500	2.89	0.789	20.02	13.019	57.86	1.494	37.95	0.055	1.40	26.4	316 SS CG P
0.360	9.14	62356S	3.250	82.55	0.250	6.34	15.420	2.70	0.844	21.43	13.012	57.83	1.595	40.51	0.055	1.40	28.2	316 SS CG P
0.360	9.14	62357S	3.500	88.90	0.250	6.34	14.250	2.50	0.914	23.18	13.025	57.89	1.716	43.59	0.055	1.40	30.3	316 SS CG P
0.360	9.14	62369S	0.440	11.13	0.240	6.09	209.060	36.59	0.080	2.02	16.725	74.33	0.292	7.42	0.060	1.52	4.9	316 SS CG P
0.360	9.14	62370S	0.500	12.70	0.240	6.09	174.930	30.61	0.095	2.41	16.618	73.86	0.326	8.28	0.060	1.52	5.4	316 SS CG P
0.360	9.14	62371S	0.560	14.30	0.240	6.09	150.750	26.38	0.110	2.80	16.583	73.70	0.359	9.12	0.060	1.52	6	316 SS CG P
0.360	9.14	62372S	0.630	15.88	0.240	6.09	131.870	23.08	0.126	3.20	16.615	73.84	0.393	9.98	0.060	1.52	6.6	316 SS CG P
0.360	9.14	62373S	0.690	17.48	0.240	6.09	117.420	20.55	0.142	3.60	16.673	74.10	0.427	10.85	0.060	1.52	7.1	316 SS CG P
0.360	9.14	62374S	0.750	19.05	0.240	6.09	105.820	18.52	0.157	3.99	16.614	73.84	0.460	11.68	0.060	1.52	7.7	316 SS CG P
0.360	9.14	62375S	0.810	20.65	0.240	6.09	96.770	16.94	0.172	4.36	16.645	73.98	0.492	12.50	0.060	1.52	8.2	316 SS CG P
0.360	9.14	62376S	0.880	22.23	0.240	6.09	88.370	15.46	0.188	4.78	16.613	73.84	0.527	13.39	0.060	1.52	8.8	316 SS CG P
0.360	9.14	62377S	1.000	25.40	0.240	6.09	75.850	13.27	0.219	5.57	16.612	73.83	0.595	15.11	0.060	1.52	9.9	316 SS CG P
0.360	9.14	62378S	1.130	28.58	0.240	6.09	66.450	11.63	0.250	6.35	16.611	73.83	0.662	16.82	0.060	1.52	11	316 SS CG P
0.360	9.14	62379S	1.250	31.75	0.240	6.09	59.110	10.35	0.281	7.14	16.611	73.83	0.729	18.52	0.060	1.52	12.2	316 SS CG P
0.360	9.14	62380S	1.380	34.93	0.240	6.09	53.140	9.30	0.313	7.94	16.634	73.93	0.797	20.24	0.060	1.52	13.3	316 SS CG P
0.360	9.14	62381S	1.500	38.10	0.240	6.09	48.390	8.47	0.344	8.73	16.645	73.98	0.864	21.95	0.060	1.52	14.4	316 SS CG P
0.360	9.14	62382S	1.750	44.45	0.240	6.09	40.960	7.17	0.406	10.31	16.628	73.90	0.999	25.38	0.060	1.52	16.7	316 SS CG P
0.360	9.14	62383S	2.000	50.80	0.240	6.09	35.550	6.22	0.468	11.88	16.635	73.93	1.133	28.78	0.060	1.52	18.9	316 SS CG P
0.360	9.14	62384S	2.250	57.15	0.240	6.09	31.330	5.48	0.531	13.47	16.637							




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg Max. Defl. Inches	Sugg Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish								
mm		mm	mm	N/mm	mm	N	mm	mm												
0.375	9.53	64092S	1.130	28.70	0.231	5.87	134.174	23.48	0.196	4.98	26.298	116.97	0.864	21.95	0.072	1.83	11	316 SS	C	P
0.375	9.53	64093S	1.130	28.70	0.293	7.44	11.422	2.00	0.494	12.55	5.642	25.10	0.463	11.76	0.041	1.04	10.3	316 SS	C	P
0.375	9.53	64094S	1.280	32.51	0.265	6.73	23.271	4.07	0.345	8.76	8.028	35.71	0.935	23.75	0.055	1.40	17	316 SS	CG	P
0.375	9.53	64095S	1.560	39.62	0.275	6.99	23.223	4.06	0.416	10.57	9.661	42.97	0.640	16.26	0.050	1.27	11.8	316 SS	C	P
0.375	9.53	64096S	1.690	42.93	0.231	5.87	80.505	14.09	0.327	8.31	26.325	117.09	1.224	31.09	0.072	1.83	17	316 SS	CG	P
0.375	9.53	64097S	1.750	44.45	0.293	7.44	7.128	1.25	0.791	20.09	5.638	25.08	0.668	16.97	0.041	1.04	15.3	316 SS	C	P
0.375	9.53	64098S	1.750	44.45	0.307	7.80	3.241	0.57	1.003	25.48	3.251	14.46	0.544	13.82	0.034	0.86	15	316 SS	C	P
0.375	9.53	64099S	2.000	50.80	0.280	7.11	12.940	2.27	0.643	16.33	8.320	37.01	0.760	19.30	0.048	1.21	16	316 SS	CG	P
0.375	9.53	64100S	2.000	50.80	0.280	7.11	10.783	1.89	0.771	19.58	8.314	36.98	0.941	23.90	0.048	1.21	18.8	316 SS	C	P
0.375	9.53	64101S	2.000	50.80	0.293	7.44	6.196	1.08	0.910	23.11	5.638	25.08	0.750	19.05	0.041	1.04	17.3	316 SS	C	P
0.375	9.53	64102S	2.250	57.15	0.250	6.35	30.488	5.34	0.578	14.68	17.622	78.38	1.469	37.31	0.063	1.59	22.5	316 SS	C	P
0.375	9.53	67613S	0.310	7.87	0.347	8.81	0.680	0.12	0.247	6.27	0.168	0.75	0.063	1.60	0.014	0.36	3.5	316 SS	C	P
0.375	9.53	67615S	0.470	11.94	0.327	8.31	2.880	0.50	0.318	8.08	0.916	4.07	0.152	3.86	0.024	0.61	5.3	316 SS	C	P
0.375	9.53	67616S	0.500	12.70	0.335	8.51	1.788	0.31	0.377	9.58	0.674	3.00	0.110	2.79	0.020	0.51	4.5	316 SS	C	P
0.375	9.53	67618S	0.500	12.70	0.331	8.41	1.210	0.21	0.313	7.95	0.379	1.69	0.187	4.75	0.022	0.56	7.5	316 SS	C	P
0.375	9.53	67619S	0.500	12.70	0.331	8.41	1.664	0.29	0.368	9.35	0.612	2.72	0.132	3.35	0.022	0.56	6	316 SS	CG	P
0.375	9.53	67620S	0.500	12.70	0.323	8.20	2.240	0.39	0.266	6.76	0.596	2.65	0.234	5.94	0.026	0.66	8	316 SS	C	P
0.375	9.53	67621S	0.500	12.70	0.333	8.46	0.783	0.14	0.290	7.37	0.227	1.01	0.210	5.33	0.021	0.53	9	316 SS	C	P
0.375	9.53	67622S	0.500	12.70	0.335	8.51	0.715	0.13	0.315	8.00	0.225	1.00	0.185	4.70	0.020	0.51	8.3	316 SS	C	P
0.375	9.53	67623S	0.530	13.46	0.319	8.10	6.130	1.07	0.299	7.60	1.833	8.15	0.168	4.27	0.028	0.71	5	316 SS	C	P
0.375	9.53	67624S	0.560	14.22	0.317	8.05	6.567	1.15	0.309	7.85	2.029	9.03	0.152	3.86	0.029	0.74	5.3	316 SS	CG	P
0.375	9.53	67625S	0.560	14.22	0.323	8.20	6.719	1.18	0.219	5.56	1.471	6.54	0.130	3.30	0.026	0.66	4	316 SS	C	P
0.375	9.53	67626S	0.590	14.99	0.323	8.20	2.067	0.36	0.343	8.71	0.709	3.15	0.247	6.27	0.026	0.66	8.5	316 SS	C	P
0.375	9.53	67627S	0.630	16.00	0.317	8.05	3.049	0.53	0.340	8.64	1.037	4.61	0.290	7.37	0.029	0.74	9	316 SS	C	P
0.375	9.53	67628S	0.630	16.00	0.323	8.20	4.479	0.78	0.328	8.33	1.469	6.53	0.156	3.96	0.026	0.66	5	316 SS	C	P
0.375	9.53	67629S	0.630	16.00	0.303	7.70	13.473	2.36	0.286	7.26	3.853	17.14	0.252	6.40	0.036	0.91	6	316 SS	C	P
0.375	9.53	67630S	0.630	16.00	0.347	8.81	0.510	0.09	0.467	11.86	0.238	1.06	0.070	1.78	0.014	0.36	4	316 SS	C	P
0.375	9.53	67631S	0.630	16.00	0.323	8.20	2.067	0.36	0.409	10.39	0.845	3.76	0.221	5.61	0.026	0.66	8.5	316 SS	CG	P
0.375	9.53	67632S	0.630	16.00	0.331	8.41	1.479	0.26	0.465	11.81	0.688	3.06	0.165	4.19	0.022	0.56	6.5	316 SS	C	P
0.375	9.53	67633S	0.630	16.00	0.255	6.48	103.661	18.14	0.150	3.81	15.549	69.16	0.480	12.19	0.060	1.52	7	316 SS	C	P
0.375	9.53	67634S	0.630	16.00	0.315	8.00	4.109	0.72	0.390	9.91	1.603	7.13	0.240	6.10	0.030	0.76	8	316 SS	CG	P
0.375	9.53	67635S	0.660	16.76	0.323	8.20	4.886	0.86	0.301	7.65	1.471	6.54	0.150	3.81	0.026	0.66	4.8	316 SS	C	P
0.375	9.53	67636S	0.660	16.76	0.323	8.20	4.479	0.78	0.328	8.33	1.469	6.53	0.156	3.96	0.026	0.66	5	316 SS	C	P
0.375	9.53	67638S	0.690	17.53	0.319	8.10	6.130	1.07	0.299	7.60	1.833	8.15	0.168	4.27	0.028	0.71	5	316 SS	C	P
0.375	9.53	67639S	0.690	17.53	0.327	8.31	3.197	0.56	0.363	9.22	1.161	5.16	0.144	3.66	0.024	0.61	5	316 SS	C	P
0.375	9.53	67640S	0.700	17.78	0.333	8.46	0.477	0.08	0.395	10.03	0.188	0.84	0.305	7.75	0.021	0.53	13.5	316 SS	C	P
0.375	9.53	67641S	0.750	19.05	0.280	7.11	28.985	5.07	0.287	7.29	8.319	37.00	0.392	9.96	0.048	1.21	8.3	316 SS	CG	P
0.375	9.53	67642S	0.750	19.05	0.343	8.71	0.295	0.05	0.606	15.39	0.179	0.80	0.144	3.66	0.016	0.41	8	316 SS	C	P
0.375	9.53	67643S	0.750	19.05	0.333	8.46	0.477	0.08	0.445	11.30	0.212	0.94	0.305	7.75	0.021	0.53	13.5	316 SS	C	P
0.375	9.53	67644S	0.750	19.05	0.295	7.49	21.279	3.72	0.247	6.27	5.256	23.38	0.280	7.11	0.040	1.02	6	316 SS	C	P
0.375	9.53	67645S	0.750	19.05	0.323	8.20	4.479	0.78	0.328	8.33	1.469	6.53	0.156	3.96	0.026	0.66	5	316 SS	C	P
0.375	9.53	67646S	0.780	19.81	0.343	8.71	0.283	0.05	0.632	16.05	0.179	0.80	0.148	3.76	0.016	0.41	8.3	316 SS	C	P
0.375	9.53	67647S	0.810	20.57	0.327	8.31	2.740	0.48	0.423	10.74	1.159	5.16	0.156	3.96	0.024	0.61	5.5	316 SS	C	P
0.375	9.53	67648S	0.810	20.57	0.323	8.20	4.135	0.72	0.356	9.04	1.472	6.55	0.163	4.14	0.026	0.66	5.3	316 SS	C	P
0.375	9.53	67649S	0.880	22.35	0.313	7.95	2.836	0.50	0.477	12.12	1.353	6.02	0.403	10.24	0.031	0.79	12	316 SS	C	P
0.375	9.53	67650S	0.880	22.35	0.319	8.10	3.198	0.56	0.573	14.55	1.832	8.15	0.245	6.22	0.028	0.71	7.8	316 SS	C	P
0.375	9.53	67651S	0.880	22.35	0.327	8.31	2.740	0.48	0.423	10.74	1.159	5.16	0.156	3.96	0.024	0.61	5.5	316 SS	CG	P
0.375	9.53	67652S	0.880	22.35	0.315	8.00	3.522	0.62	0.610	15.49	2.148	9.55	0.270	6.86	0.030	0.76	9	316 SS	CG	P
0.375	9.53	67653S	0.910	23.11	0.317	8.05	4.004	0.70	0.507	12.88	2.030	9.03	0.213	5.41	0.029	0.74	7.3	316 SS	CG	P
0.375	9.53	67654S	0.940	23.88	0.325	8.26	4.141	0.73	0.316	8.03	1.309	5.82	0.144	3.66	0.025	0.64	4.8	316 SS	C	P
0.375	9.53	67655S	0.940	23.88	0.315	8.00	4.931	0.86	0.456	11.58	2.249	10.00	0.210	5.33	0.030	0.76	7	316 SS	CG	P
0.375	9.53	67656S	0.970	24.64	0.319	8.10	1.839	0.32	0.634	16.10	1.166	5.19	0.336	8.53	0.028	0.71	12	316 SS	CG	P
0.375	9.53	67657S	1.000	25.40	0.315	8.00	3.793	0.66	0.592	15.04	2.245	9.99	0.285	7.24	0.030	0.76	8.5	316 SS	C	P
0.375	9.53	67658S	1.000	25.40	0.293	7.44	11.850	2.07	0.476	12.09	5.641	25.09								




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm		Wire Dia. Inches mm		Total Coils	Mat'l	Ends	Finish	
0.375	9.53	67680S	1.750	44.45	0.325	8.26	0.876	0.15	1.350	34.29	1.183	5.26	0.400	10.16	0.025	0.64	15	316 SS C P
0.375	9.53	67681S	1.750	44.45	0.335	8.51	0.497	0.09	1.356	34.44	0.674	3.00	0.240	6.10	0.020	0.51	11	316 SS C P
0.375	9.53	67682S	1.750	44.45	0.325	8.26	0.735	0.13	1.287	32.69	0.946	4.21	0.463	11.76	0.025	0.64	17.5	316 SS C P
0.375	9.53	67683S	2.000	50.80	0.319	8.10	1.313	0.23	1.395	35.43	1.832	8.15	0.448	11.38	0.028	0.71	16	316 SS CG P
0.375	9.53	67684S	2.000	50.80	0.315	8.00	1.761	0.31	1.276	32.41	2.247	10.00	0.510	12.95	0.030	0.76	16	316 SS C P
0.375	9.53	67685S	2.000	50.80	0.275	6.99	15.172	2.66	0.637	16.18	9.665	42.99	0.850	21.59	0.050	1.27	17	316 SS CG P
0.375	9.53	67686S	2.000	50.80	0.285	7.24	9.509	1.66	0.763	19.38	7.255	32.27	0.810	20.57	0.045	1.14	17	316 SS C P
0.375	9.53	67687S	2.000	50.80	0.265	6.73	29.089	5.09	0.429	10.90	12.479	55.51	0.770	19.56	0.055	1.40	14	316 SS CG P
0.375	9.53	67688S	2.000	50.80	0.280	7.11	12.077	2.11	0.689	17.50	8.321	37.01	0.855	21.72	0.048	1.21	17	316 SS C P
0.375	9.53	67689S	2.190	55.63	0.315	8.00	2.242	0.39	1.002	25.45	2.246	9.99	0.390	9.91	0.030	0.76	13	316 SS CG P
0.375	9.53	67690S	2.375	60.33	0.293	7.44	4.740	0.83	1.190	30.23	5.641	25.09	0.902	22.91	0.041	1.04	22	316 SS CG P
0.375	9.53	67691S	2.380	60.45	0.327	8.31	0.872	0.15	1.329	33.76	1.159	5.16	0.336	8.53	0.024	0.61	13	316 SS C P
0.375	9.53	68657S	0.250	6.35	0.291	7.39	105.335	18.43	0.056	1.42	5.899	26.24	0.126	3.20	0.042	1.07	3	316 SS CG P
0.375	9.53	68658S	0.280	7.11	0.299	7.60	34.051	5.96	0.090	2.29	3.065	13.63	0.190	4.83	0.038	0.97	4	316 SS C P
0.375	9.53	68659S	0.380	9.65	0.285	7.24	57.053	9.98	0.127	3.23	7.246	32.23	0.203	5.16	0.045	1.14	4.5	316 SS CG P
0.375	9.53	68660S	0.380	9.65	0.305	7.75	23.862	4.18	0.148	3.76	3.532	15.71	0.175	4.45	0.035	0.89	4	316 SS C P
0.375	9.53	68661S	0.420	10.67	0.280	7.11	72.462	12.68	0.115	2.92	8.333	37.07	0.261	6.63	0.048	1.21	4.5	316 SS C P
0.375	9.53	68662S	0.440	11.18	0.285	7.24	57.053	9.98	0.127	3.23	7.246	32.23	0.203	5.16	0.045	1.14	4.5	316 SS CG P
0.375	9.53	68663S	0.440	11.18	0.280	7.11	72.462	12.68	0.115	2.92	8.333	37.07	0.261	6.63	0.048	1.21	4.5	316 SS C P
0.375	9.53	68664S	0.440	11.18	0.285	7.24	71.316	12.48	0.102	2.59	7.274	32.36	0.180	4.57	0.045	1.14	4	316 SS CG P
0.375	9.53	68665S	0.470	11.94	0.285	7.24	51.866	9.08	0.140	3.56	7.261	32.30	0.259	6.58	0.045	1.14	4.8	316 SS C P
0.375	9.53	68666S	0.470	11.94	0.295	7.49	28.372	4.97	0.185	4.70	5.249	23.35	0.240	6.10	0.040	1.02	5	316 SS CG P
0.375	9.53	68667S	0.470	11.94	0.285	7.24	40.752	7.13	0.178	4.52	7.254	32.27	0.248	6.30	0.045	1.14	5.5	316 SS CG P
0.375	9.53	68668S	0.500	12.70	0.293	7.44	27.086	4.74	0.208	5.28	5.634	25.06	0.226	5.74	0.041	1.04	5.5	316 SS CG P
0.375	9.53	68669S	0.500	12.70	0.293	7.44	37.920	6.64	0.149	3.79	5.650	25.13	0.226	5.74	0.041	1.04	4.5	316 SS C P
0.375	9.53	68670S	0.500	12.70	0.275	6.99	91.033	15.93	0.106	2.69	9.649	42.92	0.225	5.72	0.050	1.27	4.5	316 SS CG P
0.375	9.53	68671S	0.500	12.70	0.280	7.11	51.759	9.06	0.161	4.09	8.333	37.07	0.261	6.63	0.048	1.21	5.5	316 SS CG P
0.375	9.53	68672S	0.500	12.70	0.265	6.73	87.267	15.27	0.143	3.63	12.479	55.51	0.330	8.38	0.055	1.40	6	316 SS CG P
0.375	9.53	68675S	0.530	13.46	0.280	7.11	60.385	10.57	0.138	3.51	8.333	37.07	0.285	7.24	0.048	1.21	5	316 SS C P
0.375	9.53	68676S	0.530	13.46	0.303	7.70	17.964	3.14	0.214	5.44	3.844	17.10	0.180	4.57	0.036	0.91	5	316 SS CG P
0.375	9.53	68677S	0.560	14.22	0.285	7.24	35.658	6.24	0.203	5.16	7.239	32.20	0.270	6.86	0.045	1.14	6	316 SS CG P
0.375	9.53	68678S	0.560	14.22	0.299	7.60	22.700	3.97	0.199	5.06	4.517	20.09	0.190	4.83	0.038	0.97	5	316 SS CG P
0.375	9.53	68680S	0.560	14.22	0.275	6.99	75.861	13.28	0.127	3.23	9.634	42.85	0.300	7.62	0.050	1.27	5	316 SS C P
0.375	9.53	68681S	0.560	14.22	0.285	7.24	35.658	6.24	0.204	5.18	7.274	32.36	0.270	6.86	0.045	1.14	6	316 SS CG P
0.375	9.53	68682S	0.590	14.99	0.289	7.34	33.366	5.84	0.190	4.83	6.340	28.20	0.237	6.02	0.043	1.09	5.5	316 SS CG P
0.375	9.53	68684S	0.630	16.00	0.289	7.34	29.195	5.11	0.218	5.54	6.365	28.31	0.258	6.55	0.043	1.09	6	316 SS CG P
0.375	9.53	68685S	0.630	16.00	0.265	6.73	116.356	20.36	0.107	2.72	12.450	55.38	0.330	8.38	0.055	1.40	5	316 SS C P
0.375	9.53	68686S	0.630	16.00	0.280	7.11	32.937	5.76	0.253	6.43	8.333	37.07	0.356	9.04	0.048	1.21	7.5	316 SS CG P
0.375	9.53	68687S	0.630	16.00	0.231	5.87	241.514	42.27	0.109	2.77	26.325	117.09	0.504	12.80	0.072	1.83	7	316 SS CG P
0.375	9.53	68688S	0.690	17.53	0.305	7.75	9.545	1.67	0.371	9.42	3.541	15.75	0.280	7.11	0.035	0.89	7	316 SS C P
0.375	9.53	68689S	0.690	17.53	0.297	7.54	17.937	3.14	0.272	6.91	4.879	21.70	0.244	6.20	0.039	0.99	6.3	316 SS CG P
0.375	9.53	68690S	0.690	17.53	0.305	7.75	11.931	2.09	0.297	7.54	3.544	15.76	0.210	5.33	0.035	0.89	6	316 SS CG P
0.375	9.53	68691S	0.690	17.53	0.250	6.35	156.250	27.34	0.113	2.87	17.656	78.53	0.375	9.53	0.063	1.59	6	316 SS CG P
0.375	9.53	68692S	0.690	17.53	0.285	7.24	21.943	3.84	0.262	6.66	5.749	25.57	0.428	10.87	0.045	1.14	8.5	316 SS C P
0.375	9.53	68693S	0.690	17.53	0.273	6.93	49.726	8.70	0.206	5.23	10.244	45.57	0.357	9.07	0.051	1.30	7	316 SS CG P
0.375	9.53	68694S	0.750	19.05	0.291	7.39	21.067	3.69	0.281	7.14	5.920	26.33	0.336	8.53	0.042	1.07	7	316 SS C P
0.375	9.53	68695S	0.750	19.05	0.275	6.99	56.896	9.96	0.170	4.32	9.672	43.02	0.350	8.89	0.050	1.27	6	316 SS C P
0.375	9.53	68696S	0.750	19.05	0.285	7.24	25.933	4.54	0.280	7.11	7.261	32.30	0.383	9.73	0.045	1.14	7.5	316 SS C P
0.375	9.53	68697S	0.750	19.05	0.295	7.49	21.279	3.72	0.247	6.27	5.256	23.38	0.240	6.10	0.040	1.02	6	316 SS CG P
0.375	9.53	68698S	0.750	19.05	0.280	7.11	27.870	4.88	0.298	7.57	8.305	36.94	0.451	11.46	0.048	1.21	8.5	316 SS C P
0.375	9.53	68699S	0.750	19.05	0.245	6.22	136.181	23.83	0.145	3.68	19.746	87.83	0.488	12.40	0.065	1.65	7.5	316 SS CG P
0.375	9.53	68700S	0.780	19.81	0.267	6.78	58.426	10.23	0.207	5.26	12.094	53.79	0.405	10.29	0.054	1.37	7.5	316 SS CG P
0.375	9.53	68701S	0.810	20.57	0.305	7.75	7.954	1.39	0.445	11.30	3.540	15.75	0.280	7.11	0.035	0.89	8	316 SS CG P
0.375	9.53	68702S	0.810	20.57	0.297	7.54	11.294	1.98	0.431	10.95	4.868	21.65	0.341	8.66	0.039	0.99	8.8	316 SS CG P
0.375	9.53	68703S	0.840	21.34	0.285	7.24	25.933	4.54	0.280	7.11	7.261	32.30	0.383	9.73	0.045	1.14	7.5	316 SS C P
0.375	9.53	68704S	0.840	21.34	0.289	7.34	23.356	4.09	0.272	6.91	6.353	28.26	0.344	8.				




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg Max. Defl. Inches	Sugg Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish								
mm		mm	mm	N/mm	mm	N	mm	mm												
0.375	9.53	68725S	1.190	30.23	0.293	7.44	9.480	1.66	0.595	15.11	5.641	25.09	0.492	12.50	0.041	1.04	12	316 SS	CG	P
0.375	9.53	68726S	1.190	30.23	0.265	6.73	33.245	5.82	0.375	9.53	12.467	55.45	0.688	17.48	0.055	1.40	12.5	316 SS	CG	P
0.375	9.53	68727S	1.220	30.99	0.293	7.44	10.533	1.84	0.536	13.61	5.646	25.11	0.492	12.50	0.041	1.04	11	316 SS	C	P
0.375	9.53	68728S	1.250	31.75	0.307	7.80	4.213	0.74	0.772	19.61	3.252	14.47	0.442	11.23	0.034	0.86	12	316 SS	C	P
0.375	9.53	68729S	1.250	31.75	0.293	7.44	11.850	2.07	0.476	12.09	5.641	25.09	0.451	11.46	0.041	1.04	10	316 SS	C	P
0.375	9.53	68730S	1.250	31.75	0.280	7.11	21.312	3.73	0.390	9.91	8.312	36.97	0.546	13.87	0.048	1.21	10.5	316 SS	C	P
0.375	9.53	68731S	1.250	31.75	0.275	6.99	24.471	4.28	0.395	10.03	9.666	42.99	0.565	14.35	0.050	1.27	11.3	316 SS	CG	P
0.375	9.53	68732S	1.310	33.27	0.285	7.24	12.967	2.27	0.559	14.20	7.249	32.24	0.630	16.00	0.045	1.14	13	316 SS	C	P
0.375	9.53	68733S	1.380	35.05	0.245	6.22	63.474	11.11	0.311	7.90	19.740	87.80	0.897	22.78	0.065	1.65	13.8	316 SS	CG	P
0.375	9.53	68734S	1.440	36.58	0.280	7.11	12.077	2.11	0.632	16.05	7.633	33.95	0.808	20.52	0.048	1.21	17	316 SS	CG	P
0.375	9.53	68735S	1.500	38.10	0.285	7.24	13.584	2.38	0.534	13.56	7.254	32.27	0.608	15.44	0.045	1.14	12.5	316 SS	C	P
0.375	9.53	68736S	1.500	38.10	0.265	6.73	26.851	4.70	0.464	11.79	12.459	55.42	0.825	20.96	0.055	1.40	15	316 SS	CG	P
0.375	9.53	68737S	1.500	38.10	0.299	7.60	7.169	1.26	0.630	16.00	4.516	20.09	0.437	11.10	0.038	0.97	11.5	316 SS	CG	P
0.375	9.53	68739S	1.560	39.62	0.299	7.60	6.306	1.10	0.716	18.19	4.515	20.08	0.524	13.31	0.038	0.97	12.8	316 SS	C	P
0.375	9.53	68740S	1.560	39.62	0.295	7.49	7.401	1.30	0.710	18.03	5.255	23.37	0.580	14.73	0.040	1.02	13.5	316 SS	C	P
0.375	9.53	68741S	1.750	44.45	0.280	7.11	13.419	2.35	0.620	15.75	8.320	37.01	0.736	18.69	0.048	1.21	15.5	316 SS	CG	P
0.375	9.53	68742S	1.780	45.21	0.285	7.24	10.565	1.85	0.687	17.45	7.258	32.28	0.698	17.73	0.045	1.14	15.5	316 SS	CG	P
0.375	9.53	68743S	1.780	45.21	0.250	6.35	41.667	7.29	0.423	10.74	17.625	78.40	1.063	27.00	0.063	1.59	17	316 SS	CG	P
0.375	9.53	68744S	1.810	45.97	0.285	7.24	10.972	1.92	0.662	16.82	7.263	32.31	0.675	17.15	0.045	1.14	15	316 SS	CG	P
0.375	9.53	68745S	1.880	47.75	0.280	7.11	17.253	3.02	0.482	12.24	8.316	36.99	0.594	15.09	0.048	1.21	12.5	316 SS	CG	P
0.375	9.53	68746S	2.000	50.80	0.295	7.49	5.007	0.88	1.049	26.65	5.252	23.36	0.760	19.30	0.040	1.02	19	316 SS	CG	P
0.375	9.53	68747S	2.030	51.56	0.231	5.87	67.841	11.87	0.389	9.98	26.390	117.38	1.426	36.22	0.072	1.83	19.8	316 SS	CG	P
0.375	9.53	68748S	2.060	52.32	0.245	6.22	46.812	8.19	0.421	10.69	19.708	87.66	1.170	29.72	0.065	1.65	18	316 SS	CG	P
0.375	9.53	68749S	2.250	57.15	0.250	6.35	34.722	6.08	0.507	12.88	17.604	78.30	1.250	31.75	0.063	1.59	20	316 SS	CG	P
0.375	9.53	68750S	2.250	57.15	0.245	6.22	41.611	7.28	0.474	12.04	19.724	87.73	1.365	34.67	0.065	1.65	20	316 SS	C	P
0.375	9.53	68751S	2.380	60.45	0.275	6.99	11.978	2.10	0.807	20.50	9.666	42.99	1.050	26.67	0.050	1.27	21	316 SS	CG	P
0.375	9.53	68752S	2.380	60.45	0.307	7.80	2.340	0.41	1.390	35.31	3.253	14.47	0.714	18.14	0.034	0.86	20	316 SS	C	P
0.375	9.53	61532S	0.500	12.70	0.323	8.21	5.200	0.91	0.283	7.17	1.470	6.53	0.123	3.12	0.026	0.66	4.6	316 SS	CG	P
0.375	9.53	61533S	0.560	14.30	0.323	8.21	4.560	0.80	0.322	8.18	1.467	6.52	0.133	3.37	0.026	0.66	5	316 SS	CG	P
0.375	9.53	61534S	0.630	15.88	0.323	8.21	4.060	0.71	0.362	9.17	1.471	6.54	0.142	3.61	0.026	0.66	5.3	316 SS	CG	P
0.375	9.53	61535S	0.690	17.48	0.323	8.21	3.660	0.64	0.401	10.18	1.468	6.52	0.152	3.86	0.026	0.66	5.7	316 SS	CG	P
0.375	9.53	61536S	0.750	19.05	0.323	8.21	3.340	0.58	0.440	11.18	1.467	6.52	0.161	4.10	0.026	0.66	6	316 SS	CG	P
0.375	9.53	61537S	0.810	20.65	0.323	8.21	3.060	0.54	0.480	12.18	1.468	6.52	0.171	4.35	0.026	0.66	6.4	316 SS	CG	P
0.375	9.53	61538S	0.880	22.23	0.323	8.21	2.830	0.50	0.519	13.19	1.468	6.52	0.181	4.59	0.026	0.66	6.8	316 SS	CG	P
0.375	9.53	61539S	0.940	23.83	0.323	8.21	2.630	0.46	0.559	14.19	1.468	6.52	0.190	4.84	0.026	0.66	7.1	316 SS	CG	P
0.375	9.53	61540S	1.000	25.40	0.323	8.21	2.460	0.43	0.598	15.18	1.469	6.53	0.200	5.08	0.026	0.66	7.5	316 SS	CG	P
0.375	9.53	61541S	1.130	28.58	0.323	8.21	2.170	0.38	0.677	17.18	1.469	6.53	0.219	5.57	0.026	0.66	8.2	316 SS	CG	P
0.375	9.53	61542S	1.250	31.75	0.323	8.21	1.940	0.34	0.756	19.20	1.469	6.53	0.239	6.06	0.026	0.66	8.9	316 SS	CG	P
0.375	9.53	61543S	1.500	38.10	0.323	8.21	1.610	0.28	0.914	23.15	1.470	6.53	0.277	7.04	0.026	0.66	10.4	316 SS	CG	P
0.375	9.53	61544S	1.750	44.45	0.323	8.21	1.370	0.24	1.071	27.20	1.468	6.52	0.316	8.02	0.026	0.66	11.8	316 SS	CG	P
0.375	9.53	61545S	2.000	50.80	0.323	8.21	1.200	0.21	1.229	31.23	1.469	6.53	0.355	9.00	0.026	0.66	13.2	316 SS	CG	P
0.375	9.53	61546S	2.250	57.15	0.323	8.21	1.060	0.19	1.387	35.29	1.469	6.53	0.393	9.99	0.026	0.66	14.7	316 SS	CG	P
0.375	9.53	61745S	0.380	9.53	0.311	7.91	13.730	2.40	0.196	4.98	2.690	11.96	0.144	3.65	0.032	0.81	4.4	316 SS	CG	P
0.375	9.53	61746S	0.500	12.70	0.311	7.91	9.790	1.72	0.275	6.98	2.692	11.96	0.175	4.45	0.032	0.81	5.3	316 SS	CG	P
0.375	9.53	61747S	0.560	14.30	0.311	7.91	8.550	1.50	0.315	7.99	2.695	11.98	0.191	4.85	0.032	0.81	5.8	316 SS	CG	P
0.375	9.53	61748S	0.630	15.88	0.311	7.91	7.610	1.33	0.354	8.98	2.694	11.97	0.207	5.25	0.032	0.81	6.3	316 SS	CG	P
0.375	9.53	61749S	0.690	17.48	0.311	7.91	6.840	1.20	0.394	9.99	2.695	11.98	0.222	5.65	0.032	0.81	6.8	316 SS	CG	P
0.375	9.53	61750S	0.750	19.05	0.311	7.91	6.220	1.09	0.433	10.98	2.695	11.98	0.238	6.04	0.032	0.81	7.2	316 SS	CG	P
0.375	9.53	61751S	0.810	20.65	0.311	7.91	5.700	1.00	0.473	12.00	2.696	11.98	0.254	6.44	0.032	0.81	7.7	316 SS	CG	P
0.375	9.53	61752S	0.880	22.23	0.311	7.91	5.260	0.92	0.512	12.98	2.695	11.98	0.269	6.84	0.032	0.81	8.2	316 SS	CG	P
0.375	9.53	61753S	0.940	23.83	0.311	7.91	4.880	0.86	0.551	14.00	2.691	11.96	0.285	7.24	0.032	0.81	8.7	316 SS	CG	P
0.375	9.53	61754S	1.000	25.40	0.311	7.91	4.560	0.80	0.590	14.98	2.691	11.96	0.301	7.63	0.032	0.81	9.1	316 SS	CG	P
0.375	9.53	61755S	1.130	28.58	0.311	7.91	4.020	0.71	0.669	16.98	2.691	11.96	0.332	8.43	0.032	0.81	10.1	316 SS	CG	P
0.375	9																			




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	E n d s Mat'l	F in s h							
0.375	9.53	61871S	2.000	50.80	0.305	7.75	2.840	0.50	1.252	31.75	3.558	15.81	0.677	17.20	0.035	0.89	18.8	316 SS CG P
0.375	9.53	61872S	2.250	57.15	0.305	7.75	2.520	0.44	1.414	35.86	3.558	15.81	0.756	19.19	0.035	0.89	21	316 SS CG P
0.375	9.53	61873S	2.500	63.50	0.305	7.75	2.260	0.40	1.576	40.03	3.559	15.82	0.834	21.18	0.035	0.89	23.1	316 SS CG P
0.380	9.65	67692S	1.000	25.40	0.338	8.59	0.955	0.17	0.806	20.47	0.770	3.43	0.179	4.55	0.021	0.53	7.5	316 SS C P
0.390	9.91	64103S	0.750	19.05	0.265	6.73	135.749	23.76	0.125	3.18	16.969	75.48	0.375	9.53	0.063	1.59	6	316 SS CG P
0.390	9.91	64104S	0.880	22.35	0.265	6.73	90.499	15.84	0.188	4.78	17.014	75.68	0.500	12.70	0.063	1.59	8	316 SS CG P
0.390	9.91	64105S	0.910	23.11	0.320	8.13	4.071	0.71	0.479	12.17	1.950	8.67	0.431	10.95	0.035	0.89	12.3	316 SS CG P
0.390	9.91	64106S	1.190	30.23	0.260	6.60	96.296	16.85	0.198	5.03	19.067	84.81	0.569	14.45	0.065	1.65	8.8	316 SS CG P
0.390	9.91	64107S	1.880	47.75	0.295	7.49	15.838	2.77	0.507	12.88	8.030	35.72	0.618	15.70	0.048	1.21	12	316 SS C P
0.390	9.91	64108S	2.000	50.80	0.295	7.49	8.799	1.54	0.912	23.17	8.025	35.70	0.950	24.13	0.048	1.21	20	316 SS CG P
0.390	9.91	67693S	0.310	7.87	0.346	8.79	1.068	0.19	0.123	3.12	0.131	0.58	0.187	4.75	0.022	0.56	7.5	316 SS C P
0.390	9.91	67694S	0.500	12.70	0.330	8.38	5.425	0.95	0.290	7.37	1.573	7.00	0.210	5.33	0.030	0.76	6	316 SS C P
0.390	9.91	67695S	0.560	14.22	0.338	8.59	2.369	0.42	0.352	8.94	0.834	3.71	0.208	5.28	0.026	0.66	7	316 SS C P
0.390	9.91	67696S	0.590	14.99	0.328	8.33	12.475	2.18	0.191	4.85	2.383	10.60	0.124	3.15	0.031	0.79	4	316 SS CG P
0.390	9.91	67697S	0.630	16.00	0.346	8.79	0.979	0.17	0.432	10.97	0.423	1.88	0.198	5.03	0.022	0.56	8	316 SS C P
0.390	9.91	67698S	0.690	17.53	0.328	8.33	7.129	1.25	0.335	8.51	2.388	10.62	0.202	5.13	0.031	0.79	5.5	316 SS C P
0.390	9.91	67699S	0.750	19.05	0.270	6.86	112.697	19.72	0.137	3.48	15.439	68.67	0.360	9.14	0.060	1.52	6	316 SS CG P
0.390	9.91	67700S	0.750	19.05	0.374	9.50	0.018	0.00	0.686	17.42	0.012	0.05	0.064	1.63	0.008	0.20	7	316 SS C P
0.390	9.91	67701S	0.880	22.35	0.342	8.69	1.410	0.25	0.664	16.87	0.936	4.16	0.216	5.49	0.024	0.61	8	316 SS C P
0.390	9.91	67702S	0.970	24.64	0.342	8.69	1.538	0.27	0.726	18.44	1.117	4.97	0.204	5.18	0.024	0.61	7.5	316 SS C P
0.390	9.91	67703S	0.970	24.64	0.346	8.79	1.068	0.19	0.783	19.89	0.836	3.72	0.187	4.75	0.022	0.56	7.5	316 SS C P
0.390	9.91	67704S	1.000	25.40	0.346	8.79	0.356	0.06	0.571	14.50	0.203	0.90	0.429	10.90	0.022	0.56	18.5	316 SS C P
0.390	9.91	67705S	1.250	31.75	0.342	8.69	1.167	0.20	0.956	24.28	1.116	4.96	0.246	6.25	0.024	0.61	9.3	316 SS C P
0.390	9.91	67706S	1.250	31.75	0.346	8.79	0.588	0.10	0.964	24.49	0.567	2.52	0.286	7.26	0.022	0.56	12	316 SS C P
0.390	9.91	67707S	1.340	34.04	0.318	8.08	5.916	1.04	0.627	15.93	3.709	16.50	0.396	10.06	0.036	0.91	10	316 SS C P
0.390	9.91	67708S	1.380	35.05	0.328	8.33	2.495	0.44	0.956	24.28	2.385	10.61	0.372	9.45	0.031	0.79	12	316 SS CG P
0.390	9.91	67709S	1.380	35.05	0.330	8.38	3.617	0.63	0.598	15.19	2.163	9.62	0.270	6.86	0.030	0.76	8	316 SS C P
0.390	9.91	67710S	1.750	44.45	0.350	8.89	0.282	0.05	1.410	35.81	0.398	1.77	0.340	8.64	0.020	0.51	16	316 SS C P
0.390	9.91	67711S	1.810	45.97	0.348	8.84	0.346	0.06	1.453	36.91	0.503	2.24	0.357	9.07	0.021	0.53	16	316 SS C P
0.390	9.91	67712S	1.880	47.75	0.350	8.89	0.304	0.05	1.560	39.62	0.474	2.11	0.320	8.13	0.020	0.51	15	316 SS C P
0.390	9.91	67713S	2.000	50.80	0.308	7.82	5.540	0.97	0.982	24.94	5.440	24.20	0.738	18.75	0.041	1.04	17	316 SS C P
0.390	9.91	67714S	2.030	51.56	0.338	8.59	1.316	0.23	1.076	27.33	1.416	6.30	0.286	7.26	0.026	0.66	11	316 SS CG P
0.390	9.91	68753S	0.380	9.65	0.320	8.13	23.958	4.19	0.142	3.61	3.402	15.13	0.131	3.33	0.035	0.89	3.8	316 SS CG P
0.390	9.91	68754S	0.410	10.41	0.320	8.13	18.634	3.26	0.183	4.65	3.410	15.17	0.149	3.79	0.035	0.89	4.3	316 SS CG P
0.390	9.91	68755S	0.440	11.18	0.310	7.87	21.324	3.73	0.220	5.59	4.691	20.87	0.220	5.59	0.040	1.02	5.5	316 SS CG P
0.390	9.91	68756S	0.500	12.70	0.318	8.08	11.832	2.07	0.284	7.21	3.360	14.95	0.216	5.49	0.036	0.91	6	316 SS CG P
0.390	9.91	68757S	0.500	12.70	0.326	8.28	7.142	1.25	0.276	7.01	1.971	8.77	0.224	5.69	0.032	0.81	6	316 SS C P
0.390	9.91	68758S	0.630	16.00	0.270	6.86	128.797	22.54	0.120	3.05	15.456	68.75	0.390	9.91	0.060	1.52	5.5	316 SS C P
0.390	9.91	68759S	0.750	19.05	0.295	7.49	31.676	5.54	0.253	6.43	8.014	35.65	0.380	9.65	0.048	1.21	7	316 SS C P
0.390	9.91	68760S	0.750	19.05	0.280	7.11	76.062	13.31	0.158	4.01	12.018	53.46	0.330	8.38	0.055	1.40	6	316 SS CG P
0.390	9.91	68761S	0.880	22.35	0.310	7.87	14.927	2.61	0.339	8.61	5.060	22.51	0.280	7.11	0.040	1.02	7	316 SS CG P
0.390	9.91	68762S	0.880	22.35	0.322	8.18	12.341	2.16	0.254	6.45	3.135	13.94	0.204	5.18	0.034	0.86	5	316 SS C P
0.390	9.91	68764S	1.000	25.40	0.320	8.13	7.623	1.33	0.448	11.38	3.415	15.19	0.298	7.57	0.035	0.89	7.5	316 SS C P
0.390	9.91	68765S	1.000	25.40	0.270	6.86	78.398	13.72	0.197	5.00	15.444	68.70	0.465	11.81	0.060	1.52	7.8	316 SS CG P
0.390	9.91	68766S	1.000	25.40	0.308	7.82	11.079	1.94	0.491	12.47	5.440	24.20	0.431	10.95	0.041	1.04	9.5	316 SS C P
0.390	9.91	68767S	1.060	26.92	0.260	6.60	92.857	16.25	0.205	5.21	19.036	84.67	0.585	14.86	0.065	1.65	9	316 SS CG P
0.390	9.91	68768S	1.130	28.70	0.260	6.60	92.857	16.25	0.205	5.21	19.036	84.67	0.650	16.51	0.065	1.65	9	316 SS C P
0.390	9.91	68769S	1.190	30.23	0.290	7.37	20.283	3.55	0.460	11.68	9.330	41.50	0.640	16.26	0.050	1.27	11.8	316 SS C P
0.390	9.91	68770S	1.250	31.75	0.265	6.73	63.882	11.18	0.266	6.76	16.993	75.59	0.656	16.66	0.063	1.59	10.5	316 SS CG P
0.390	9.91	68771S	1.250	31.75	0.265	6.73	65.421	11.45	0.260	6.60	17.009	75.66	0.706	17.93	0.063	1.59	10.3	316 SS C P
0.390	9.91	68772S	1.280	32.51	0.260	6.60	76.471	13.38	0.249	6.33	19.041	84.69	0.748	19.00	0.065	1.65	10.5	316 SS C P
0.390	9.91	68773S	1.470	37.34	0.274	6.96	32.213	5.64	0.436	11.07	14.045	62.47	0.812	20.63	0.058	1.47	14	316 SS CG P
0.390	9.91	68774S	1.500	38.10	0.308	7.82	7.042	1.23	0.773	19.63	5.443	24.21	0.607	15.42	0.041	1.04	13.8	316 SS C P
0.390	9.91	68775S	1.530	38.86	0.295	7.49	12.183	2.13	0.659	16.74	8.029	35.71	0.713	18.11	0.048	1.21	15	316 SS CG P
0.390	9.91	68776S	1.880	47.75	0.274	6.96	26.659	4.67	0.526	13.36	14.023	62.37	0.957	24.31	0.058	1.47	16.5	316 SS CG P
0.390	9.91	68777S	2.000	50.80	0.310	7.87	4.443	0.78	1.140	28.96	5.065	22.53	0.752	19.10	0.040	1.02	18.8	316 SS CG P
0.390	9.91	68778S	2.13															




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	Finish								
0.390	9.91	62223S	0.690	17.48	0.296	7.53	31.700	5.55	0.249	6.31	7.893	35.08	0.320	8.13	0.047	1.19	6.8	316 SS	CG	P
0.390	9.91	62224S	0.750	19.05	0.296	7.53	28.700	5.03	0.275	6.97	7.893	35.08	0.343	8.71	0.047	1.19	7.3	316 SS	CG	P
0.390	9.91	62225S	0.810	20.65	0.296	7.53	26.200	4.59	0.301	7.63	7.886	35.05	0.366	9.30	0.047	1.19	7.8	316 SS	CG	P
0.390	9.91	62226S	0.880	22.23	0.296	7.53	23.700	4.15	0.333	8.44	7.892	35.08	0.395	10.03	0.047	1.19	8.4	316 SS	CG	P
0.390	9.91	62227S	0.940	23.83	0.296	7.53	22.100	3.87	0.357	9.05	7.890	35.07	0.418	10.62	0.047	1.19	8.8	316 SS	CG	P
0.390	9.91	62228S	1.000	25.40	0.296	7.53	20.800	3.64	0.379	9.62	7.883	35.04	0.442	11.23	0.047	1.19	9.3	316 SS	CG	P
0.390	9.91	62229S	1.130	28.58	0.296	7.53	18.300	3.21	0.431	10.93	7.887	35.05	0.489	12.42	0.047	1.19	10.3	316 SS	CG	P
0.390	9.91	62230S	1.250	31.75	0.296	7.53	16.100	2.82	0.490	12.42	7.889	35.06	0.536	13.61	0.047	1.19	11.4	316 SS	CG	P
0.390	9.91	62231S	1.380	34.93	0.296	7.53	14.600	2.56	0.540	13.70	7.884	35.04	0.583	14.81	0.047	1.19	12.4	316 SS	CG	P
0.390	9.91	62232S	1.500	38.10	0.296	7.53	13.300	2.33	0.593	15.04	7.887	35.05	0.630	16.00	0.047	1.19	13.4	316 SS	CG	P
0.390	9.91	62233S	1.750	44.45	0.296	7.53	11.300	1.98	0.697	17.70	7.876	35.00	0.729	18.52	0.047	1.19	15.4	316 SS	CG	P
0.390	9.91	62234S	2.000	50.80	0.296	7.53	9.700	1.70	0.812	20.62	7.876	35.00	0.832	21.13	0.047	1.19	17.6	316 SS	CG	P
0.406	10.31	64109S	0.500	12.70	0.281	7.14	144.799	25.34	0.113	2.87	16.362	72.78	0.328	8.33	0.063	1.59	5.3	316 SS	CG	P
0.406	10.31	64110S	0.940	23.88	0.330	8.38	7.471	1.31	0.561	14.25	4.191	18.64	0.342	8.69	0.038	0.97	9	316 SS	CG	P
0.406	10.31	64111S	0.980	24.89	0.262	6.66	200.349	35.06	0.123	3.12	24.643	109.61	0.540	13.72	0.072	1.83	6.5	316 SS	C	P
0.406	10.31	64112S	1.060	26.92	0.342	8.69	5.011	0.88	0.503	12.78	2.521	11.21	0.256	6.50	0.032	0.81	7	316 SS	C	P
0.406	10.31	64113S	1.130	28.70	0.330	8.38	7.214	1.26	0.581	14.76	4.191	18.64	0.390	9.91	0.038	0.97	9.3	316 SS	C	P
0.406	10.31	64114S	1.280	32.51	0.336	8.53	4.898	0.86	0.671	17.04	3.287	14.62	0.333	8.46	0.035	0.89	9.5	316 SS	CG	P
0.406	10.31	64115S	1.750	44.45	0.281	7.14	33.614	5.88	0.489	12.42	16.437	73.11	1.000	25.40	0.063	1.59	16	316 SS	CG	P
0.406	10.31	64116S	2.000	50.80	0.322	8.18	5.377	0.94	1.024	26.01	5.506	24.49	0.756	19.20	0.042	1.07	17	316 SS	C	P
0.406	10.31	64117S	2.000	50.80	0.311	7.90	9.332	1.63	0.828	21.03	7.727	34.37	0.846	21.49	0.048	1.21	16.8	316 SS	C	P
0.406	10.31	64118S	2.130	54.10	0.311	7.90	7.673	1.34	1.007	25.58	7.727	34.37	0.950	24.13	0.048	1.21	20	316 SS	CG	P
0.406	10.31	64119S	2.310	58.67	0.316	8.03	6.810	1.19	0.990	25.15	6.742	29.99	0.810	20.57	0.045	1.14	18	316 SS	CG	P
0.406	10.31	64120S	2.500	63.50	0.311	7.90	6.577	1.15	1.175	29.85	7.728	34.37	1.140	28.96	0.048	1.21	23	316 SS	C	P
0.406	10.31	67716S	0.410	10.41	0.348	8.84	5.500	0.96	0.265	6.73	1.458	6.49	0.145	3.68	0.029	0.74	5	316 SS	CG	P
0.406	10.31	67717S	0.410	10.41	0.370	9.40	0.749	0.13	0.302	7.67	0.226	1.01	0.108	2.74	0.018	0.46	5	316 SS	C	P
0.406	10.31	67718S	0.500	12.70	0.348	8.84	5.500	0.96	0.326	8.28	1.793	7.98	0.174	4.42	0.029	0.74	5	316 SS	C	P
0.406	10.31	67719S	0.560	14.22	0.362	9.20	1.293	0.23	0.428	10.87	0.553	2.46	0.132	3.35	0.022	0.56	6	316 SS	CG	P
0.406	10.31	67720S	0.560	14.22	0.346	8.79	3.809	0.67	0.350	8.89	1.333	5.93	0.210	5.33	0.030	0.76	7	316 SS	CG	P
0.406	10.31	67721S	0.560	14.22	0.350	8.89	2.845	0.50	0.336	8.53	0.956	4.25	0.224	5.69	0.028	0.71	7	316 SS	C	P
0.406	10.31	67722S	0.590	14.99	0.358	9.09	1.240	0.22	0.398	10.11	0.494	2.20	0.192	4.88	0.024	0.61	8	316 SS	CG	P
0.406	10.31	67723S	0.590	14.99	0.358	9.09	1.240	0.22	0.374	9.50	0.464	2.06	0.216	5.49	0.024	0.61	8	316 SS	C	P
0.406	10.31	67724S	0.590	14.99	0.346	8.79	4.762	0.83	0.410	10.41	1.952	8.68	0.180	4.57	0.030	0.76	6	316 SS	CG	P
0.406	10.31	67725S	0.630	16.00	0.358	9.09	2.976	0.52	0.361	9.17	1.074	4.78	0.132	3.35	0.024	0.61	4.5	316 SS	C	P
0.406	10.31	67726S	0.660	16.76	0.342	8.69	3.132	0.55	0.308	7.82	0.965	4.29	0.352	8.94	0.032	0.81	10	316 SS	C	P
0.406	10.31	67727S	0.690	17.53	0.344	8.74	2.736	0.48	0.349	8.87	0.955	4.25	0.341	8.66	0.031	0.79	10	316 SS	C	P
0.406	10.31	67728S	0.720	18.29	0.342	8.69	4.176	0.73	0.432	10.97	1.804	8.02	0.288	7.32	0.032	0.81	8	316 SS	C	P
0.406	10.31	67729S	0.750	19.05	0.346	8.79	2.721	0.48	0.450	11.43	1.224	5.44	0.300	7.62	0.030	0.76	9	316 SS	C	P
0.406	10.31	67730S	0.750	19.05	0.354	8.99	1.301	0.23	0.490	12.45	0.637	2.83	0.260	6.60	0.026	0.66	10	316 SS	CG	P
0.406	10.31	67731S	0.800	20.32	0.364	9.25	0.426	0.08	0.527	13.39	0.225	1.00	0.273	6.93	0.021	0.53	12	316 SS	C	P
0.406	10.31	67732S	0.810	20.57	0.366	9.30	0.464	0.08	0.600	15.24	0.278	1.24	0.210	5.33	0.020	0.51	9.5	316 SS	C	P
0.406	10.31	67733S	0.880	22.35	0.364	9.25	0.682	0.12	0.686	17.42	0.468	2.08	0.194	4.93	0.021	0.53	8.3	316 SS	C	P
0.406	10.31	67734S	0.880	22.35	0.382	9.70	0.061	0.01	0.760	19.30	0.046	0.21	0.120	3.05	0.012	0.31	9	316 SS	C	P
0.406	10.31	67735S	0.940	23.88	0.362	9.20	0.862	0.15	0.742	18.85	0.640	2.85	0.198	5.03	0.022	0.56	8	316 SS	C	P
0.406	10.31	67736S	1.000	25.40	0.338	8.59	6.490	1.14	0.464	11.79	3.011	13.39	0.272	6.91	0.034	0.86	7	316 SS	C	P
0.406	10.31	67737S	1.000	25.40	0.306	7.77	24.737	4.33	0.363	9.22	8.980	39.94	0.500	12.70	0.050	1.27	9	316 SS	C	P
0.406	10.31	67738S	1.000	25.40	0.276	7.01	86.574	15.15	0.213	5.41	18.440	82.02	0.553	14.05	0.065	1.65	8.5	316 SS	CG	P
0.406	10.31	67739S	1.130	28.70	0.356	9.04	0.570	0.10	0.692	17.58	0.394	1.75	0.438	11.13	0.025	0.64	17.5	316 SS	CG	P
0.406	10.31	67740S	1.250	31.75	0.330	8.38	5.811	1.02	0.721	18.31	4.190	18.64	0.456	11.58	0.038	0.97	11	316 SS	C	P
0.406	10.31	67741S	1.250	31.75	0.356	9.04	1.039	0.18	0.962	24.44	1.000	4.45	0.288	7.32	0.025	0.64	10.5	316 SS	C	P
0.406	10.31	67742S	1.310	33.27	0.330	8.38	6.153	1.08	0.681	17.30	4.190	18.64	0.437	11.10	0.038	0.97	10.5	316 SS	C	P
0.406	10.31	67743S	1.310	33.27	0.330	8.38	6.153	1.08	0.681	17.30	4.190	18.64	0.437	11.10	0.038	0.97	10.5	316 SS	C	P
0.406	10.31	67744S	1.630	41.40	0.281	7.14	42.782	7.49	0.384	9.75	16.428	73.07	0.813	20.65	0.063	1.59	13	316 SS	CG	P
0.406	10.31	67745S	1.630	41.40	0.326	8.28	6.216	1.09	0.784	19.91	4.873									




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length		Wire Dia. Inches mm		Total Coils	Mat'l	E n d s	F in sh	
0.406	10.31	68794S	0.630	16.00	0.286	7.26	86.911	15.21	0.172	4.37	14.949	66.49	0.390	9.91	0.060	1.52	6.5	316 SS CG P
0.406	10.31	68795S	0.690	17.53	0.276	7.01	140.683	24.62	0.131	3.33	18.429	81.97	0.390	9.91	0.065	1.65	6	316 SS CG P
0.406	10.31	68796S	0.750	19.05	0.298	7.57	44.309	7.75	0.254	6.45	11.254	50.06	0.405	10.29	0.054	1.37	7.5	316 SS CG P
0.406	10.31	68797S	0.750	19.05	0.281	7.14	104.577	18.30	0.157	3.99	16.419	73.03	0.406	10.31	0.063	1.59	6.5	316 SS CG P
0.406	10.31	68798S	0.750	19.05	0.276	7.01	140.683	24.62	0.131	3.33	18.429	81.97	0.390	9.91	0.065	1.65	6	316 SS CG P
0.406	10.31	68799S	0.810	20.57	0.304	7.72	30.243	5.29	0.315	8.00	9.527	42.38	0.421	10.69	0.051	1.30	8.3	316 SS CG P
0.406	10.31	68800S	0.810	20.57	0.324	8.23	13.207	2.31	0.397	10.08	5.243	23.32	0.308	7.82	0.041	1.04	7.5	316 SS CG P
0.406	10.31	68801S	0.810	20.57	0.286	7.26	53.945	9.44	0.255	6.48	13.756	61.19	0.555	14.10	0.060	1.52	9.3	316 SS CG P
0.406	10.31	68802S	0.880	22.35	0.336	8.53	9.183	1.61	0.358	9.09	3.288	14.63	0.245	6.22	0.035	0.89	6	316 SS CG P
0.406	10.31	68803S	0.880	22.35	0.246	6.25	246.301	43.10	0.132	3.35	32.512	144.61	0.640	16.26	0.080	2.03	8	316 SS CG P
0.406	10.31	68804S	0.880	22.35	0.311	7.90	19.730	3.45	0.392	9.96	7.734	34.40	0.428	10.87	0.048	1.21	9	316 SS CG P
0.406	10.31	68805S	0.940	23.88	0.324	8.23	16.142	2.83	0.325	8.26	5.246	23.33	0.308	7.82	0.041	1.04	6.5	316 SS C P
0.406	10.31	68806S	0.940	23.88	0.304	7.72	31.503	5.51	0.302	7.67	9.514	42.32	0.408	10.36	0.051	1.30	8	316 SS CG P
0.406	10.31	68807S	1.000	25.40	0.326	8.28	8.703	1.52	0.560	14.22	4.874	21.68	0.380	9.65	0.040	1.02	9.5	316 SS CG P
0.406	10.31	68808S	1.000	25.40	0.276	7.01	62.526	10.94	0.285	7.24	17.820	79.26	0.715	18.16	0.065	1.65	11	316 SS CG P
0.406	10.31	68809S	1.000	25.40	0.322	8.18	9.488	1.66	0.559	14.20	5.304	23.59	0.441	11.20	0.042	1.07	10.5	316 SS CG P
0.406	10.31	68810S	1.000	25.40	0.281	7.14	85.563	14.97	0.192	4.88	16.428	73.07	0.531	13.49	0.063	1.59	7.5	316 SS C P
0.406	10.31	68811S	1.030	26.16	0.306	7.77	23.884	4.18	0.376	9.55	8.980	39.94	0.463	11.76	0.050	1.27	9.3	316 SS CG P
0.406	10.31	68812S	1.060	26.92	0.281	7.14	67.228	11.77	0.244	6.20	16.404	72.97	0.563	14.30	0.063	1.59	9	316 SS CG P
0.406	10.31	68813S	1.060	26.92	0.311	7.90	19.730	3.45	0.392	9.96	7.734	34.40	0.428	10.87	0.048	1.21	9	316 SS CG P
0.406	10.31	68814S	1.090	27.69	0.338	8.59	4.636	0.81	0.650	16.51	3.013	13.40	0.340	8.64	0.034	0.86	9	316 SS C P
0.406	10.31	68815S	1.090	27.69	0.328	8.33	9.750	1.71	0.464	11.79	4.524	20.12	0.312	7.93	0.039	0.99	8	316 SS CG P
0.406	10.31	68817S	1.190	30.23	0.324	8.23	17.091	2.99	0.307	7.80	5.247	23.34	0.297	7.54	0.041	1.04	6.3	316 SS C P
0.406	10.31	68818S	1.190	30.23	0.306	7.77	19.240	3.37	0.467	11.86	8.985	39.97	0.550	13.97	0.050	1.27	11	316 SS CG P
0.406	10.31	68819S	1.190	30.23	0.336	8.53	5.248	0.92	0.626	15.90	3.285	14.61	0.350	8.89	0.035	0.89	9	316 SS C P
0.406	10.31	68820S	1.250	31.75	0.326	8.28	9.324	1.63	0.523	13.28	4.876	21.69	0.360	9.14	0.040	1.02	9	316 SS CG P
0.406	10.31	68821S	1.310	33.27	0.304	7.72	18.351	3.21	0.519	13.18	9.524	42.36	0.627	15.93	0.051	1.30	12.3	316 SS CG P
0.406	10.31	68822S	1.340	34.04	0.322	8.18	6.301	1.10	0.718	18.24	4.524	20.12	0.622	15.80	0.042	1.07	14.8	316 SS CG P
0.406	10.31	68823S	1.380	35.05	0.322	8.18	10.081	1.76	0.546	13.87	5.504	24.48	0.420	10.67	0.042	1.07	10	316 SS CG P
0.406	10.31	68824S	1.440	36.58	0.336	8.53	3.339	0.58	0.984	24.99	3.286	14.62	0.455	11.56	0.035	0.89	13	316 SS CG P
0.406	10.31	68825S	1.500	38.10	0.304	7.72	18.902	3.31	0.504	12.80	9.527	42.38	0.612	15.55	0.051	1.30	12	316 SS CG P
0.406	10.31	68826S	1.500	38.10	0.328	8.33	5.572	0.98	0.811	20.60	4.519	20.10	0.488	12.40	0.039	0.99	12.5	316 SS CG P
0.406	10.31	68827S	1.590	40.39	0.281	7.14	42.782	7.49	0.384	9.75	16.428	73.07	0.813	20.65	0.063	1.59	13	316 SS CG P
0.406	10.31	68828S	1.630	41.40	0.281	7.14	40.922	7.16	0.401	10.19	16.410	72.99	0.844	21.44	0.063	1.59	13.5	316 SS CG P
0.406	10.31	68829S	1.690	42.93	0.311	7.90	8.124	1.42	0.787	19.99	6.394	28.44	0.903	22.94	0.048	1.21	19	316 SS CG P
0.406	10.31	68830S	1.720	43.69	0.298	7.57	14.770	2.59	0.721	18.31	10.649	47.37	0.999	25.38	0.054	1.37	18.5	316 SS CG P
0.406	10.31	68832S	1.780	45.21	0.286	7.26	35.554	6.22	0.420	10.67	14.933	66.42	0.780	19.81	0.060	1.52	13	316 SS CG P
0.406	10.31	68833S	1.780	45.21	0.306	7.77	10.822	1.89	0.830	21.08	8.982	39.95	0.900	22.86	0.050	1.27	18	316 SS CG P
0.406	10.31	68834S	1.880	47.75	0.296	7.52	16.741	2.93	0.693	17.60	11.602	51.61	1.034	26.26	0.055	1.40	17.8	316 SS C P
0.406	10.31	68835S	1.910	48.51	0.304	7.72	18.902	3.31	0.503	12.78	9.508	42.29	0.663	16.84	0.051	1.30	12	316 SS CG P
0.406	10.31	68836S	2.060	52.32	0.311	7.90	7.673	1.34	1.007	25.58	7.727	34.37	0.950	24.13	0.048	1.21	20	316 SS CG P
0.406	10.31	68837S	2.340	59.44	0.272	6.91	35.920	6.29	0.559	14.20	20.079	89.31	1.407	35.74	0.067	1.70	20	316 SS C P
0.406	10.31	68838S	2.380	60.45	0.306	7.77	11.544	2.02	0.778	19.76	8.981	39.95	0.900	22.86	0.050	1.27	17	316 SS C P
0.406	10.31	68839S	2.380	60.45	0.306	7.77	10.822	1.89	0.830	21.08	8.982	39.95	0.900	22.86	0.050	1.27	18	316 SS CG P
0.420	10.67	64121S	0.750	19.05	0.320	8.13	22.034	3.86	0.300	7.62	6.610	29.40	0.450	11.43	0.050	1.27	9	316 SS CG P
0.420	10.67	64122S	0.750	19.05	0.295	7.49	75.900	13.28	0.210	5.33	15.939	70.90	0.469	11.91	0.063	1.59	7.5	316 SS CG P
0.420	10.67	64123S	1.250	31.75	0.348	8.84	4.944	0.87	0.699	17.76	3.456	15.37	0.342	8.69	0.036	0.91	9.5	316 SS CG P
0.420	10.67	64124S	1.380	35.05	0.325	8.26	12.959	2.27	0.578	14.68	7.490	33.32	0.594	15.09	0.048	1.21	11.5	316 SS C P
0.420	10.67	67754S	0.410	10.41	0.384	9.75	0.898	0.16	0.315	8.00	0.283	1.26	0.095	2.41	0.018	0.46	4.3	316 SS C P
0.420	10.67	67755S	0.500	12.70	0.378	9.60	0.765	0.13	0.332	8.43	0.254	1.13	0.168	4.27	0.021	0.53	7	316 SS C P
0.420	10.67	67756S	0.500	12.70	0.372	9.45	1.670	0.29	0.332	8.43	0.554	2.46	0.168	4.27	0.024	0.61	6	316 SS C P
0.420	10.67	67757S	0.500	12.70	0.380	9.65	0.625	0.11	0.340	8.64	0.213	0.95	0.160	4.06	0.020	0.51	7	316 SS C P
0.420	10.67	67758S	0.530	13.46	0.330	8.38	38.880	6.80	0.168	4.27	6.532	29.05	0.248	6.30	0.045	1.14	4.5	316 SS C P
0.420	10.67	67759S	0.630	16.00	0.364	9.25	4.252	0.74	0.386	9.80	1.641	7.30	0.168	4.27	0.028	0.71	5	316 SS C P
0.420	10.67	67760S	0.690	17.53	0.364	9.25	4.252	0.74	0.386	9.80	1.641	7.30	0.168	4.27	0.028	0.71	5	316 SS C P
0.420	10.67	67761S	0.690	17.53														




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends C P								
0.420	10.67	68841S	0.310	7.87	0.340	8.64	58.318	10.21	0.081	2.06	4.724	21.01	0.160	4.06	0.040	1.02	3	316 SS	C P
0.420	10.67	68842S	0.380	9.65	0.334	8.48	53.170	9.31	0.108	2.74	5.742	25.54	0.151	3.84	0.043	1.09	3.5	316 SS	CG P
0.420	10.67	68843S	0.410	10.41	0.334	8.48	22.787	3.99	0.173	4.39	3.942	17.53	0.237	6.02	0.043	1.09	5.5	316 SS	CG P
0.420	10.67	68844S	0.410	10.41	0.300	7.62	138.889	24.31	0.104	2.64	14.444	64.25	0.270	6.86	0.060	1.52	4.5	316 SS	CG P
0.420	10.67	68845S	0.440	11.18	0.338	8.59	32.441	5.68	0.156	3.96	5.061	22.51	0.205	5.21	0.041	1.04	4	316 SS	C P
0.420	10.67	68846S	0.440	11.18	0.312	7.93	144.528	25.29	0.075	1.91	10.840	48.22	0.189	4.80	0.054	1.37	3.5	316 SS	CG P
0.420	10.67	68847S	0.440	11.18	0.330	8.38	77.760	13.61	0.084	2.13	6.532	29.05	0.146	3.71	0.045	1.14	3.3	316 SS	CG P
0.420	10.67	68848S	0.440	11.18	0.300	7.62	138.889	24.31	0.104	2.64	14.444	64.25	0.330	8.38	0.060	1.52	4.5	316 SS	C P
0.420	10.67	68849S	0.470	11.94	0.312	7.93	86.717	15.18	0.126	3.20	10.926	48.60	0.243	6.17	0.054	1.37	4.5	316 SS	CG P
0.420	10.67	68850S	0.470	11.94	0.276	7.01	354.258	62.00	0.068	1.73	24.090	107.15	0.306	7.77	0.072	1.83	4.3	316 SS	CG P
0.420	10.67	68851S	0.470	11.94	0.336	8.53	24.005	4.20	0.222	5.64	5.329	23.70	0.210	5.33	0.042	1.07	5	316 SS	CG P
0.420	10.67	68852S	0.500	12.70	0.338	8.59	23.594	4.13	0.215	5.46	5.073	22.57	0.236	5.99	0.041	1.04	4.8	316 SS	C P
0.420	10.67	68853S	0.500	12.70	0.300	7.62	138.889	24.31	0.104	2.64	14.444	64.25	0.270	6.86	0.060	1.52	4.5	316 SS	CG P
0.420	10.67	68854S	0.530	13.46	0.312	7.93	72.264	12.65	0.151	3.84	10.912	48.54	0.324	8.23	0.054	1.37	5	316 SS	C P
0.420	10.67	68856S	0.590	14.99	0.270	6.86	321.053	56.18	0.082	2.08	26.326	117.10	0.375	9.53	0.075	1.91	5	316 SS	CG P
0.420	10.67	68859S	0.630	16.00	0.320	8.13	38.559	6.75	0.226	5.74	8.714	38.76	0.350	8.89	0.050	1.27	6	316 SS	C P
0.420	10.67	68860S	0.630	16.00	0.336	8.53	24.005	4.20	0.222	5.64	5.329	23.70	0.252	6.40	0.042	1.07	5	316 SS	C P
0.420	10.67	68861S	0.630	16.00	0.310	7.87	67.207	11.76	0.167	4.24	11.224	49.92	0.303	7.70	0.055	1.40	5.5	316 SS	CG P
0.420	10.67	68862S	0.690	17.53	0.325	8.26	30.778	5.39	0.243	6.17	7.479	33.27	0.333	8.46	0.048	1.21	6	316 SS	C P
0.420	10.67	68863S	0.690	17.53	0.320	8.13	51.412	9.00	0.169	4.29	8.689	38.65	0.300	7.62	0.050	1.27	5	316 SS	C P
0.420	10.67	68864S	0.690	17.53	0.312	7.93	61.940	10.84	0.176	4.47	10.901	48.49	0.351	8.92	0.054	1.37	5.5	316 SS	C P
0.420	10.67	68865S	0.750	19.05	0.284	7.21	122.560	21.45	0.166	4.22	20.345	90.50	0.476	12.09	0.068	1.73	7	316 SS	CG P
0.420	10.67	68866S	0.750	19.05	0.310	7.87	58.806	10.29	0.191	4.85	11.232	49.96	0.330	8.38	0.055	1.40	6	316 SS	CG P
0.420	10.67	68867S	0.750	19.05	0.312	7.93	48.176	8.43	0.226	5.74	10.888	48.43	0.405	10.29	0.054	1.37	6.5	316 SS	C P
0.420	10.67	68868S	0.750	19.05	0.348	8.84	7.806	1.37	0.443	11.25	3.458	15.38	0.279	7.09	0.036	0.91	6.8	316 SS	C P
0.420	10.67	68869S	0.750	19.05	0.344	8.74	9.352	1.64	0.434	11.02	4.059	18.05	0.266	6.76	0.038	0.97	7	316 SS	CG P
0.420	10.67	68870S	0.750	19.05	0.338	8.59	9.269	1.62	0.340	8.64	3.151	14.02	0.410	10.41	0.041	1.04	9	316 SS	C P
0.420	10.67	68871S	0.750	19.05	0.348	8.84	7.416	1.30	0.466	11.84	3.456	15.37	0.252	6.40	0.036	0.91	7	316 SS	CG P
0.420	10.67	68872S	0.750	19.05	0.334	8.48	15.951	2.79	0.358	9.09	5.710	25.40	0.344	8.74	0.043	1.09	7	316 SS	C P
0.420	10.67	68873S	0.810	20.57	0.300	7.62	77.160	13.50	0.188	4.78	14.506	64.52	0.390	9.91	0.060	1.52	6.5	316 SS	CG P
0.420	10.67	68874S	0.840	21.34	0.338	8.59	10.814	1.89	0.469	11.91	5.072	22.56	0.369	9.37	0.041	1.04	8	316 SS	C P
0.420	10.67	68875S	0.840	21.34	0.312	7.93	51.010	8.93	0.214	5.44	10.916	48.55	0.338	8.59	0.054	1.37	6.3	316 SS	CG P
0.420	10.67	68876S	0.880	22.35	0.310	7.87	47.045	8.23	0.239	6.07	11.244	50.01	0.385	9.78	0.055	1.40	7	316 SS	CG P
0.420	10.67	68877S	0.910	23.11	0.288	7.32	95.441	16.70	0.204	5.18	19.470	86.60	0.536	13.61	0.067	1.70	8	316 SS	CG P
0.420	10.67	68878S	1.000	25.40	0.330	8.38	17.673	3.09	0.369	9.37	6.521	29.01	0.338	8.59	0.045	1.14	7.5	316 SS	CG P
0.420	10.67	68879S	1.000	25.40	0.336	8.53	9.002	1.58	0.580	14.73	5.221	23.22	0.420	10.67	0.042	1.07	10	316 SS	CG P
0.420	10.67	68880S	1.000	25.40	0.340	8.64	7.290	1.28	0.600	15.24	4.374	19.46	0.400	10.16	0.040	1.02	10	316 SS	CG P
0.420	10.67	68881S	1.000	25.40	0.352	8.94	5.809	1.02	0.503	12.78	2.922	13.00	0.238	6.05	0.034	0.86	7	316 SS	CG P
0.420	10.67	68882S	1.000	25.40	0.320	8.13	22.034	3.86	0.395	10.03	8.703	38.71	0.450	11.43	0.050	1.27	9	316 SS	CG P
0.420	10.67	68883S	1.030	26.16	0.310	7.87	39.204	6.68	0.287	7.29	11.252	50.05	0.495	12.57	0.055	1.40	8	316 SS	C P
0.420	10.67	68884S	1.030	26.16	0.340	8.64	11.664	2.04	0.404	10.26	4.712	20.96	0.320	8.13	0.040	1.02	7	316 SS	C P
0.420	10.67	68885S	1.060	26.92	0.330	8.38	17.673	3.09	0.370	9.40	6.539	29.09	0.338	8.59	0.045	1.14	7.5	316 SS	CG P
0.420	10.67	68886S	1.130	28.70	0.356	9.04	2.805	0.49	0.778	19.76	2.182	9.71	0.352	8.94	0.032	0.81	10	316 SS	C P
0.420	10.67	68887S	1.190	30.23	0.276	7.01	79.708	13.95	0.300	7.62	23.912	106.36	0.864	21.95	0.072	1.83	12	316 SS	CG P
0.420	10.67	68888S	1.220	30.99	0.310	7.87	30.352	5.31	0.370	9.40	11.230	49.95	0.536	13.61	0.055	1.40	9.8	316 SS	CG P
0.420	10.67	68889S	1.250	31.75	0.352	8.94	3.227	0.57	0.842	21.39	2.717	12.09	0.408	10.36	0.034	0.86	11	316 SS	C P
0.420	10.67	68890S	1.250	31.75	0.344	8.74	6.234	1.09	0.650	16.51	4.052	18.02	0.361	9.17	0.038	0.97	9.5	316 SS	CG P
0.420	10.67	68891S	1.250	31.75	0.290	7.37	55.416	9.70	0.323	8.20	17.899	79.62	0.715	18.16	0.065	1.65	11	316 SS	CG P
0.420	10.67	68892S	1.280	32.51	0.340	8.64	9.720	1.70	0.485	12.32	4.714	20.97	0.360	9.14	0.040	1.02	8	316 SS	C P
0.420	10.67	68893S	1.280	32.51	0.295	7.49	49.111	8.59	0.324	8.23	15.912	70.78	0.656	16.66	0.063	1.59	10.5	316 SS	CG P
0.420	10.67	68894S	1.380	35.05	0.330	8.38	17.673	3.09	0.370	9.40	6.539	29.09	0.338	8.59	0.045	1.14	7.5	316 SS	CG P
0.420	10.67	68895S	1.410	35.81	0.330	8.38	16.904	2.96	0.386	9.80	6.525	29.02	0.349	8.87	0.045	1.14	7.8	316 SS	CG P
0.420	10.67	68896S	1.410	35.81	0.325	8.26	12.311	2.15	0.608	15.44	7.485	33.29	0.570	14.48	0.048	1.21	12	316 SS	CG P
0.420	10.67	68898S	1.500	38.10	0.344	8.74	6.449	1.13	0.629	15.98	4.056	18.04	0.390	9.91	0.038	0.97	9.3	316 SS	C P
0.420	10.67	68899S	1.500	38.10	0.312	7.93	22.820	3.99</td											




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D.		Rate		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length		Wire Dia. Inches mm		Total Coils	E N D S Mat'l	F in s h		
0.420	10.67	61943S	1.000	25.40	0.344	8.73	9.200	1.61	0.448	11.36	4.122	18.32	0.286	7.26	0.038	0.97	7.1	316 SS CG P
0.420	10.67	61944S	1.250	31.75	0.344	8.73	7.100	1.24	0.580	14.73	4.118	18.30	0.343	8.71	0.038	0.97	8.6	316 SS CG P
0.420	10.67	61945S	1.500	38.10	0.344	8.73	5.800	1.02	0.710	18.02	4.118	18.30	0.381	9.68	0.038	0.97	10.1	316 SS CG P
0.420	10.67	61946S	1.750	44.45	0.344	8.73	5.000	0.88	0.824	20.90	4.120	18.31	0.438	11.13	0.038	0.97	11.4	316 SS CG P
0.420	10.67	61947S	2.000	50.80	0.344	8.73	4.300	0.75	0.958	24.31	4.119	18.31	0.496	12.60	0.038	0.97	12.9	316 SS CG P
0.420	10.67	61948S	2.250	57.15	0.344	8.73	3.800	0.67	1.084	27.49	4.119	18.31	0.550	13.97	0.038	0.97	14.3	316 SS CG P
0.420	10.67	61949S	2.500	63.50	0.344	8.73	3.500	0.61	1.177	29.86	4.120	18.31	0.594	15.09	0.038	0.97	15.4	316 SS CG P
0.420	10.67	62063S	0.500	12.70	0.336	8.53	28.300	4.96	0.190	4.83	5.377	23.90	0.190	4.83	0.042	1.07	4.5	316 SS CG P
0.420	10.67	62064S	0.630	15.88	0.336	8.53	22.500	3.94	0.239	6.07	5.378	23.90	0.220	5.59	0.042	1.07	5.2	316 SS CG P
0.420	10.67	62065S	0.750	19.05	0.336	8.53	18.300	3.21	0.294	7.47	5.380	23.91	0.253	6.43	0.042	1.07	5.9	316 SS CG P
0.420	10.67	62066S	0.880	22.23	0.336	8.53	15.400	2.70	0.350	8.87	5.390	23.96	0.285	7.24	0.042	1.07	6.7	316 SS CG P
0.420	10.67	62067S	1.000	25.40	0.336	8.53	13.300	2.33	0.405	10.27	5.387	23.94	0.316	8.03	0.042	1.07	7.4	316 SS CG P
0.420	10.67	62068S	1.250	31.75	0.336	8.53	10.800	1.89	0.498	12.65	5.378	23.90	0.369	9.37	0.042	1.07	8.7	316 SS CG P
0.420	10.67	62069S	1.500	38.10	0.336	8.53	8.700	1.52	0.619	15.70	5.385	23.93	0.442	11.23	0.042	1.07	10.3	316 SS CG P
0.420	10.67	62070S	1.750	44.45	0.336	8.53	7.500	1.31	0.718	18.22	5.385	23.93	0.499	12.67	0.042	1.07	11.6	316 SS CG P
0.420	10.67	62071S	2.000	50.80	0.336	8.53	6.200	1.09	0.868	22.03	5.382	23.92	0.580	14.73	0.042	1.07	13.6	316 SS CG P
0.420	10.67	62072S	2.250	57.15	0.336	8.53	5.600	0.98	0.961	24.39	5.382	23.92	0.636	16.15	0.042	1.07	14.9	316 SS CG P
0.420	10.67	62073S	2.500	63.50	0.336	8.53	5.000	0.88	1.077	27.31	5.385	23.93	0.699	17.75	0.042	1.07	16.4	316 SS CG P
0.420	10.67	62145S	0.500	12.70	0.330	8.39	37.000	6.48	0.175	4.45	6.475	28.78	0.219	5.56	0.045	1.14	4.6	316 SS CG P
0.420	10.67	62146S	0.630	15.88	0.330	8.39	28.300	4.96	0.229	5.82	6.481	28.80	0.255	6.48	0.045	1.14	5.4	316 SS CG P
0.420	10.67	62147S	0.750	19.05	0.330	8.39	23.000	4.03	0.282	7.16	6.486	28.83	0.291	7.39	0.045	1.14	6.2	316 SS CG P
0.420	10.67	62148S	0.880	22.23	0.330	8.39	19.300	3.38	0.336	8.53	6.485	28.82	0.327	8.31	0.045	1.14	7	316 SS CG P
0.420	10.67	62149S	1.000	25.40	0.330	8.39	16.700	2.93	0.388	9.85	6.480	28.80	0.363	9.22	0.045	1.14	7.8	316 SS CG P
0.420	10.67	62150S	1.250	31.75	0.330	8.39	13.100	2.29	0.495	12.56	6.485	28.82	0.435	11.05	0.045	1.14	9.4	316 SS CG P
0.420	10.67	62151S	1.500	38.10	0.330	8.39	10.700	1.87	0.606	15.38	6.484	28.82	0.507	12.88	0.045	1.14	11.1	316 SS CG P
0.420	10.67	62152S	1.750	44.45	0.330	8.39	9.200	1.61	0.705	17.89	6.486	28.83	0.577	14.66	0.045	1.14	12.6	316 SS CG P
0.420	10.67	62153S	2.000	50.80	0.330	8.39	8.000	1.40	0.811	20.57	6.488	28.84	0.647	16.43	0.045	1.14	14.2	316 SS CG P
0.420	10.67	62154S	2.250	57.15	0.330	8.39	7.000	1.23	0.926	23.51	6.482	28.81	0.725	18.42	0.045	1.14	15.9	316 SS CG P
0.420	10.67	62155S	2.500	63.50	0.330	8.39	6.300	1.10	1.029	26.13	6.483	28.81	0.791	20.09	0.045	1.14	17.4	316 SS CG P
0.420	10.67	62235S	0.500	12.70	0.326	8.29	45.000	7.88	0.163	4.15	7.335	32.60	0.218	5.54	0.047	1.19	4.6	316 SS CG P
0.420	10.67	62236S	0.630	15.88	0.326	8.29	34.200	5.99	0.215	5.46	7.353	32.68	0.260	6.60	0.047	1.19	5.4	316 SS CG P
0.420	10.67	62237S	0.750	19.05	0.326	8.29	28.300	4.96	0.260	6.60	7.358	32.70	0.283	7.19	0.047	1.19	6.2	316 SS CG P
0.420	10.67	62238S	0.880	22.23	0.326	8.29	23.300	4.08	0.316	8.01	7.363	32.72	0.330	8.38	0.047	1.19	7	316 SS CG P
0.420	10.67	62239S	1.000	25.40	0.326	8.29	20.800	3.64	0.354	8.97	7.363	32.72	0.377	9.58	0.047	1.19	7.7	316 SS CG P
0.420	10.67	62240S	1.250	31.75	0.326	8.29	15.800	2.77	0.466	11.81	7.363	32.72	0.447	11.35	0.047	1.19	9.4	316 SS CG P
0.420	10.67	62241S	1.500	38.10	0.326	8.29	12.900	2.26	0.570	14.47	7.353	32.68	0.519	13.18	0.047	1.19	11.1	316 SS CG P
0.420	10.67	62242S	1.750	44.45	0.326	8.29	11.200	1.96	0.657	16.67	7.358	32.70	0.579	14.71	0.047	1.19	12.5	316 SS CG P
0.420	10.67	62243S	2.000	50.80	0.326	8.29	9.600	1.68	0.766	19.45	7.354	32.68	0.683	17.35	0.047	1.19	14.2	316 SS CG P
0.420	10.67	62326S	0.500	12.70	0.318	8.07	60.100	10.53	0.155	3.94	9.316	41.40	0.255	6.48	0.051	1.30	4.8	316 SS CG P
0.420	10.67	62327S	0.630	15.88	0.318	8.07	45.700	8.00	0.204	5.18	9.323	41.44	0.300	7.62	0.051	1.30	5.7	316 SS CG P
0.420	10.67	62328S	0.750	19.05	0.318	8.07	36.900	6.46	0.253	6.42	9.336	41.49	0.345	8.76	0.051	1.30	6.6	316 SS CG P
0.420	10.67	62329S	0.880	22.23	0.318	8.07	30.900	5.41	0.302	7.66	9.332	41.48	0.390	9.91	0.051	1.30	7.5	316 SS CG P
0.420	10.67	62330S	1.000	25.40	0.318	8.07	26.700	4.68	0.349	8.87	9.318	41.41	0.434	11.02	0.051	1.30	8.3	316 SS CG P
0.420	10.67	62331S	1.250	31.75	0.318	8.07	20.800	3.64	0.448	11.38	9.318	41.41	0.525	13.34	0.051	1.30	10.1	316 SS CG P
0.420	10.67	62332S	1.500	38.10	0.318	8.07	17.100	3.00	0.545	13.84	9.320	41.42	0.615	15.62	0.051	1.30	11.8	316 SS CG P
0.420	10.67	62333S	1.750	44.45	0.318	8.07	14.500	2.54	0.643	16.33	9.324	41.44	0.705	17.91	0.051	1.30	13.6	316 SS CG P
0.420	10.67	62334S	2.000	50.80	0.318	8.07	12.600	2.21	0.740	18.79	9.324	41.44	0.795	20.19	0.051	1.30	15.4	316 SS CG P
0.420	10.67	62335S	2.250	57.15	0.318	8.07	11.200	1.96	0.833	21.14	9.330	41.47	0.881	22.38	0.051	1.30	17	316 SS CG P
0.420	10.67	62336S	2.500	63.50	0.318	8.07	10.000	1.75	0.933	23.68	9.330	41.47	0.971	24.66	0.051	1.30	18.8	316 SS CG P
0.420	10.67	62338S	0.500	12.70	0.310	7.87	79.100	13.85	0.143	3.63	11.311	50.27	0.276	7.01	0.055	1.40	5	316 SS CG P
0.420	10.67	62359S	0.630	15.88	0.310	7.87	62.500	10.95	0.181	4.60	11.313	50.28	0.317	8.05	0.055	1.40	5.8	316 SS CG P
0.420	10.67	62360S	0.750	19.05	0.310	7.87	50.800	8.90	0.223	5.66	11.328	50.35	0.373	9.47	0.055	1.40	6.6	316 SS CG P
0.420	10.67	62361S	0.880	22.23	0.310	7.87	43.300	7.58	0.262	6.64	11.345	50.42	0.414	10.52	0.055	1.40	7.4	316 SS CG P
0.420	10.67	62362S	1.000	25.40	0.310	7.87	36.700	6.43	0.309	7.83	11.340	50.40	0.469	11.91	0.055	1.40	8.4	316 SS CG P
0.420	10.67	62363S	1.250	31.75	0.310	7.87	29.200	5.11	0.388	9.84	11.330	50.36	0.551	14.00	0.055	1.40	10.1	316 SS CG P
0.420	10.67	62364S																




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In.	Sugg Max. Defl. Inches	Sugg Max. Load Lbs.	Solid Length Inches	Wire Dia. Inches	Total Coils	Mat'l	Ends	Finish								
0.420	10.67	62405S	1.000	25.40	0.294	7.49	65.000	11.38	0.246	6.25	15.990	71.07	0.556	14.12	0.063	1.59	8.7	316 SS	CG	P
0.420	10.67	62406S	1.250	31.75	0.294	7.49	50.400	8.83	0.318	8.06	16.027	71.23	0.677	17.20	0.063	1.59	10.6	316 SS	CG	P
0.420	10.67	62407S	1.500	38.10	0.294	7.49	41.300	7.23	0.388	9.84	16.024	71.22	0.796	20.22	0.063	1.59	12.5	316 SS	CG	P
0.420	10.67	62408S	1.750	44.45	0.294	7.49	34.900	6.11	0.459	11.64	16.019	71.20	0.917	23.29	0.063	1.59	14.4	316 SS	CG	P
0.420	10.67	62409S	2.000	50.80	0.294	7.49	30.200	5.29	0.530	13.45	16.006	71.14	1.043	26.49	0.063	1.59	16.3	316 SS	CG	P
0.420	10.67	62410S	2.250	57.15	0.294	7.49	26.700	4.68	0.600	15.21	16.020	71.20	1.159	29.44	0.063	1.59	18.2	316 SS	CG	P
0.420	10.67	62411S	2.500	63.50	0.294	7.49	23.900	4.19	0.670	17.00	16.013	71.17	1.277	32.44	0.063	1.59	20.1	316 SS	CG	P
0.420	10.67	62412S	0.750	19.05	0.286	7.27	119.700	20.96	0.162	4.12	19.391	86.18	0.468	11.89	0.067	1.70	6.8	316 SS	CG	P
0.420	10.67	62413S	1.000	25.40	0.286	7.27	85.100	14.90	0.228	5.79	19.403	86.24	0.602	15.29	0.067	1.70	8.7	316 SS	CG	P
0.420	10.67	62414S	1.250	31.75	0.286	7.27	66.100	11.58	0.294	7.46	19.433	86.37	0.736	18.69	0.067	1.70	10.7	316 SS	CG	P
0.420	10.67	62415S	1.500	38.10	0.286	7.27	54.000	9.46	0.360	9.13	19.440	86.40	0.870	22.10	0.067	1.70	12.6	316 SS	CG	P
0.420	10.67	62416S	1.750	44.45	0.286	7.27	45.600	7.99	0.426	10.81	19.426	86.34	1.004	25.50	0.067	1.70	14.6	316 SS	CG	P
0.420	10.67	62417S	2.000	50.80	0.286	7.27	39.500	6.92	0.492	12.48	19.434	86.37	1.138	28.91	0.067	1.70	16.5	316 SS	CG	P
0.420	10.67	62418S	2.250	57.15	0.286	7.27	34.800	6.10	0.558	14.17	19.418	86.30	1.272	32.31	0.067	1.70	18.5	316 SS	CG	P
0.420	10.67	62419S	2.500	63.50	0.286	7.27	31.200	5.46	0.623	15.81	19.438	86.39	1.406	35.71	0.067	1.70	20.4	316 SS	CG	P
0.420	10.67	62420S	1.000	25.40	0.276	7.01	116.000	20.32	0.207	5.26	24.012	106.72	0.658	16.71	0.072	1.83	8.9	316 SS	CG	P
0.420	10.67	62421S	1.250	31.75	0.276	7.01	89.750	15.72	0.268	6.79	24.053	106.90	0.807	20.50	0.072	1.83	10.9	316 SS	CG	P
0.420	10.67	62422S	1.500	38.10	0.276	7.01	73.250	12.83	0.328	8.32	24.026	106.78	0.955	24.26	0.072	1.83	12.9	316 SS	CG	P
0.420	10.67	62423S	1.750	44.45	0.276	7.01	61.830	10.83	0.388	9.86	23.991	106.63	1.104	28.04	0.072	1.83	14.9	316 SS	CG	P
0.420	10.67	62424S	2.000	50.80	0.276	7.01	53.500	9.37	0.449	11.39	24.022	106.76	1.253	31.83	0.072	1.83	16.9	316 SS	CG	P
0.420	10.67	62425S	2.250	57.15	0.276	7.01	47.170	8.26	0.509	12.92	24.008	106.70	1.402	35.61	0.072	1.83	18.9	316 SS	CG	P
0.420	10.67	62426S	2.500	63.50	0.276	7.01	42.170	7.39	0.570	14.46	24.035	106.82	1.550	39.37	0.072	1.83	20.9	316 SS	CG	P
0.437	11.10	64125S	0.560	14.22	0.373	9.47	8.769	1.54	0.268	6.81	2.350	10.45	0.168	4.27	0.032	0.81	4.3	316 SS	C	P
0.437	11.10	64126S	0.750	19.05	0.329	8.36	42.041	7.36	0.250	6.35	10.510	46.75	0.405	10.29	0.054	1.37	6.5	316 SS	C	P
0.437	11.10	64127S	0.880	22.35	0.312	7.93	72.628	12.71	0.212	5.39	15.397	68.49	0.438	11.13	0.063	1.59	7	316 SS	CG	P
0.437	11.10	64128S	1.000	25.40	0.342	8.69	21.537	3.77	0.335	8.51	7.215	32.09	0.380	9.65	0.048	1.21	7	316 SS	C	P
0.437	11.10	64129S	1.060	26.92	0.312	7.93	48.419	8.47	0.318	8.08	15.397	68.49	0.594	15.09	0.063	1.59	9.5	316 SS	C	P
0.437	11.10	64130S	1.060	26.92	0.312	7.93	72.628	12.71	0.212	5.39	15.397	68.49	0.500	12.70	0.063	1.59	7	316 SS	C	P
0.437	11.10	64131S	1.060	26.92	0.355	9.02	9.892	1.73	0.494	12.55	4.887	21.74	0.359	9.12	0.041	1.04	7.8	316 SS	C	P
0.437	11.10	64132S	1.380	35.05	0.342	8.69	8.615	1.51	0.644	16.36	5.548	24.68	0.736	18.69	0.048	1.21	14.5	316 SS	C	P
0.437	11.10	64133S	1.880	47.75	0.369	9.37	2.687	0.47	1.046	26.57	2.811	12.50	0.425	10.80	0.034	0.86	11.5	316 SS	C	P
0.437	11.10	64134S	2.000	50.80	0.329	8.36	14.014	2.45	0.750	19.05	10.511	46.75	0.891	22.63	0.054	1.37	15.5	316 SS	C	P
0.437	11.10	64135S	2.000	50.80	0.375	9.53	1.232	0.22	1.473	37.41	1.815	8.07	0.527	13.39	0.031	0.79	16	316 SS	C	P
0.437	11.10	64136S	2.000	50.80	0.293	7.44	45.151	7.90	0.513	13.03	23.162	103.03	1.318	33.48	0.072	1.83	17.3	316 SS	C	P
0.437	11.10	64137S	2.130	54.10	0.375	9.53	2.013	0.35	1.167	29.64	2.349	10.45	0.410	10.41	0.032	0.81	11.8	316 SS	C	P
0.437	11.10	64138S	2.250	57.15	0.355	9.02	4.277	0.75	1.143	29.03	4.889	21.75	0.668	16.97	0.041	1.04	15.3	316 SS	C	P
0.437	11.10	64139S	2.500	63.50	0.342	8.69	7.427	1.30	0.972	24.69	7.219	32.11	0.831	21.11	0.048	1.21	16.5	316 SS	C	P
0.437	11.10	67780S	0.500	12.70	0.377	9.58	7.509	1.31	0.258	6.55	1.937	8.62	0.150	3.81	0.030	0.76	4	316 SS	C	P
0.437	11.10	67781S	0.560	14.22	0.387	9.83	1.396	0.24	0.360	9.14	0.503	2.24	0.200	5.08	0.025	0.64	7	316 SS	C	P
0.437	11.10	67782S	0.660	16.76	0.405	10.29	0.244	0.04	0.540	13.72	0.132	0.59	0.120	3.05	0.016	0.41	6.5	316 SS	C	P
0.437	11.10	67783S	0.690	17.53	0.337	8.56	41.474	7.26	0.202	5.13	8.378	37.27	0.313	7.95	0.050	1.27	5.3	316 SS	C	P
0.437	11.10	67784S	0.750	19.05	0.377	9.58	5.006	0.88	0.388	9.86	1.942	8.64	0.180	4.57	0.030	0.76	5	316 SS	C	P
0.437	11.10	67785S	0.750	19.05	0.381	9.68	3.743	0.66	0.422	10.72	1.580	7.03	0.168	4.27	0.028	0.71	5	316 SS	C	P
0.437	11.10	67786S	0.840	21.34	0.377	9.58	3.004	0.53	0.630	16.00	1.893	8.42	0.210	5.33	0.030	0.76	7	316 SS	CG	P
0.437	11.10	67787S	0.840	21.34	0.387	9.83	1.396	0.24	0.640	16.26	0.893	3.97	0.200	5.08	0.025	0.64	7	316 SS	C	P
0.437	11.10	67788S	0.880	22.35	0.385	9.78	1.646	0.29	0.698	17.73	1.149	5.11	0.182	4.62	0.026	0.66	7	316 SS	CG	P
0.437	11.10	67789S	0.880	22.35	0.385	9.78	2.743	0.48	0.462	11.74	1.267	5.64	0.156	3.96	0.026	0.66	5	316 SS	C	P
0.437	11.10	67790S	0.880	22.35	0.375	9.53	1.437	0.25	0.415	10.54	0.596	2.65	0.465	11.81	0.031	0.79	14	316 SS	C	P
0.437	11.10	67791S	0.880	22.35	0.385	9.78	1.646	0.29	0.672	17.07	1.106	4.92	0.208	5.28	0.026	0.66	7	316 SS	C	P
0.437	11.10	67792S	0.910	23.11	0.327	8.31	37.309	6.53	0.290	7.37	10.820	48.13	0.413	10.49	0.055	1.40	7.5	316 SS	CG	P
0.437	11.10	67793S	0.940	23.88	0.397	10.08	0.345	0.06	0.720	18.29	0.248	1.10	0.220	5.59	0.020	0.51	10	316 SS	C	P
0.437	11.10	67794S	1.000	25.40	0.397	10.08	0.345	0.06	0.780	19.81	0.269	1.20	0.220	5.59	0.020	0.51	10	316 SS	C	P
0.437	11.10	67795S	1.000	25.40	0.342	8.69	21.537	3.77	0.335	8.51	7.215	32.09	0.333	8.46	0.048	1.21	7	316 SS	CG	P
0.437	11.10	67796S	1.000	25.40	0.377</															




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	E n d s h									
0.437	11.10	68912S	0.470	11.94	0.312	7.93	121.047	21.18	0.127	3.23	15.373	68.38	0.313	7.95	0.063	1.59	5	316 SS	CG	P
0.437	11.10	68913S	0.500	12.70	0.367	9.32	12.833	2.25	0.239	6.07	3.067	13.64	0.184	4.67	0.035	0.89	4.3	316 SS	C	P
0.437	11.10	68914S	0.500	12.70	0.287	7.29	238.271	41.69	0.087	2.21	20.724	92.18	0.413	10.49	0.075	1.91	5.5	316 SS	CG	P
0.437	11.10	68915S	0.530	13.46	0.293	7.44	230.271	40.30	0.101	2.57	23.257	103.45	0.360	9.14	0.072	1.83	5	316 SS	CG	P
0.437	11.10	68916S	0.530	13.46	0.361	9.17	13.677	2.39	0.286	7.26	3.912	17.40	0.190	4.83	0.038	0.97	5	316 SS	CG	P
0.437	11.10	68917S	0.560	14.22	0.312	7.93	121.047	21.18	0.127	3.23	15.373	68.38	0.313	7.95	0.063	1.59	5	316 SS	CG	P
0.437	11.10	68918S	0.560	14.22	0.303	7.70	124.321	21.76	0.151	3.84	18.772	83.50	0.402	10.21	0.067	1.70	6	316 SS	CG	P
0.437	11.10	68919S	0.590	14.99	0.312	7.93	90.785	15.89	0.169	4.29	15.343	68.25	0.375	9.53	0.063	1.59	6	316 SS	CG	P
0.437	11.10	68920S	0.630	16.00	0.342	8.69	26.922	4.71	0.268	6.81	7.215	32.09	0.285	7.24	0.048	1.21	6	316 SS	CG	P
0.437	11.10	68921S	0.630	16.00	0.359	9.12	15.290	2.68	0.276	7.01	4.220	18.77	0.234	5.94	0.039	0.99	5	316 SS	C	P
0.437	11.10	68922S	0.630	16.00	0.373	9.47	9.865	1.73	0.238	6.05	2.348	10.44	0.128	3.25	0.032	0.81	4	316 SS	CG	P
0.437	11.10	68923S	0.630	16.00	0.327	8.31	91.199	15.96	0.119	3.02	10.853	48.27	0.234	5.94	0.055	1.40	4.3	316 SS	CG	P
0.437	11.10	68924S	0.690	17.53	0.287	7.29	277.913	48.64	0.091	2.31	25.290	112.49	0.375	9.53	0.075	1.91	5	316 SS	CG	P
0.437	11.10	68925S	0.750	19.05	0.329	8.36	37.837	6.62	0.278	7.06	10.519	46.79	0.432	10.97	0.054	1.37	7	316 SS	C	P
0.437	11.10	68926S	0.750	19.05	0.327	8.31	41.039	7.18	0.264	6.71	10.834	48.19	0.385	9.78	0.055	1.40	7	316 SS	CG	P
0.437	11.10	68927S	0.750	19.05	0.353	8.97	25.245	4.42	0.203	5.16	5.125	22.80	0.231	5.87	0.042	1.07	4.5	316 SS	C	P
0.437	11.10	68928S	0.750	19.05	0.367	9.32	8.250	1.44	0.371	9.42	3.061	13.62	0.193	4.90	0.035	0.89	5.5	316 SS	CG	P
0.437	11.10	68929S	0.750	19.05	0.293	7.44	172.704	30.22	0.134	3.40	23.142	102.94	0.504	12.80	0.072	1.83	6	316 SS	C	P
0.437	11.10	68930S	0.750	19.05	0.329	8.36	31.531	5.52	0.318	8.08	10.027	44.60	0.432	10.97	0.054	1.37	8	316 SS	CG	P
0.437	11.10	68931S	0.810	20.57	0.367	9.32	5.250	0.92	0.512	13.01	2.688	11.96	0.298	7.57	0.035	0.89	7.5	316 SS	C	P
0.437	11.10	68932S	0.810	20.57	0.361	9.17	11.724	2.05	0.333	8.46	3.904	17.37	0.209	5.31	0.038	0.97	5.5	316 SS	CG	P
0.437	11.10	68933S	0.810	20.57	0.355	9.02	9.480	1.66	0.441	11.20	4.181	18.60	0.369	9.37	0.041	1.04	8	316 SS	C	P
0.437	11.10	68934S	0.810	20.57	0.277	7.04	225.058	39.39	0.136	3.45	30.608	136.14	0.560	14.22	0.080	2.03	7	316 SS	CG	P
0.437	11.10	68935S	0.810	20.57	0.287	7.29	166.748	29.18	0.152	3.86	25.346	112.74	0.525	13.34	0.075	1.91	7	316 SS	CG	P
0.437	11.10	68936S	0.880	22.35	0.293	7.44	138.163	24.18	0.168	4.27	23.211	103.24	0.504	12.80	0.072	1.83	7	316 SS	CG	P
0.437	11.10	68937S	0.880	22.35	0.317	8.05	60.467	10.58	0.231	5.87	13.968	62.13	0.420	10.67	0.060	1.52	7	316 SS	CG	P
0.437	11.10	68938S	0.940	23.88	0.373	9.47	3.946	0.69	0.595	15.11	2.348	10.44	0.256	6.50	0.032	0.81	7	316 SS	C	P
0.437	11.10	68939S	0.940	23.88	0.353	8.97	12.623	2.21	0.407	10.34	5.138	22.85	0.294	7.47	0.042	1.07	7	316 SS	CG	P
0.437	11.10	68940S	1.000	25.40	0.293	7.44	115.136	20.15	0.201	5.11	23.142	102.94	0.648	16.46	0.072	1.83	8	316 SS	C	P
0.437	11.10	68941S	1.000	25.40	0.327	8.31	29.314	5.13	0.369	9.37	10.817	48.11	0.495	12.57	0.055	1.40	9	316 SS	CG	P
0.437	11.10	68942S	1.000	25.40	0.369	9.37	6.380	1.12	0.440	11.18	2.807	12.49	0.204	5.18	0.034	0.86	6	316 SS	CG	P
0.437	11.10	68943S	1.000	25.40	0.347	8.81	13.091	2.29	0.481	12.22	6.297	28.01	0.428	10.87	0.045	1.14	8.5	316 SS	C	P
0.437	11.10	68944S	1.000	25.40	0.353	8.97	7.889	1.38	0.538	13.67	4.244	18.88	0.462	11.74	0.042	1.07	10	316 SS	C	P
0.437	11.10	68945S	1.030	26.16	0.355	9.02	7.584	1.33	0.599	15.22	4.543	20.21	0.431	10.95	0.041	1.04	9.5	316 SS	C	P
0.437	11.10	68946S	1.080	27.43	0.369	9.37	3.190	0.56	0.740	18.80	2.361	10.50	0.340	8.64	0.034	0.86	10	316 SS	CG	P
0.437	11.10	68947S	1.090	27.69	0.359	9.12	4.587	0.80	0.622	15.80	2.853	12.69	0.468	11.89	0.039	0.99	12	316 SS	CG	P
0.437	11.10	68948S	1.130	28.70	0.342	8.69	21.537	3.77	0.335	8.51	7.215	32.09	0.333	8.46	0.048	1.21	7	316 SS	CG	P
0.437	11.10	68949S	1.130	28.70	0.307	7.80	86.689	15.17	0.199	5.06	17.251	76.73	0.520	13.21	0.065	1.65	7	316 SS	C	P
0.437	11.10	68950S	1.130	28.70	0.293	7.44	92.109	16.12	0.252	6.40	23.211	103.24	0.684	17.37	0.072	1.83	9.5	316 SS	CG	P
0.437	11.10	68951S	1.160	29.46	0.347	8.81	9.455	1.66	0.620	15.75	5.862	20.07	0.540	13.72	0.045	1.14	11	316 SS	C	P
0.437	11.10	68952S	1.160	29.46	0.327	8.31	24.141	4.23	0.449	11.41	10.839	48.21	0.578	14.68	0.055	1.40	10.5	316 SS	CG	P
0.437	11.10	68953S	1.250	31.75	0.347	8.81	14.182	2.48	0.444	11.28	6.297	28.01	0.360	9.14	0.045	1.14	8	316 SS	CG	P
0.437	11.10	68954S	1.250	31.75	0.353	8.97	5.844	1.02	0.670	17.02	3.915	17.41	0.580	14.73	0.042	1.07	12.8	316 SS	C	P
0.437	11.10	68955S	1.250	31.75	0.307	7.80	48.161	8.43	0.358	9.09	17.242	76.69	0.715	18.16	0.065	1.65	11	316 SS	CG	P
0.437	11.10	68956S	1.310	33.27	0.342	8.69	21.537	3.77	0.335	8.51	7.215	32.09	0.333	8.46	0.048	1.21	7	316 SS	CG	P
0.437	11.10	68957S	1.340	34.04	0.307	7.80	43.345	7.59	0.397	10.08	17.208	76.54	0.780	19.81	0.065	1.65	12	316 SS	CG	P
0.437	11.10	68958S	1.340	34.04	0.359	9.12	7.977	1.40	0.529	13.44	4.220	18.77	0.341	8.66	0.039	0.99	7.8	316 SS	C	P
0.437	11.10	68959S	1.380	35.05	0.327	8.31	18.654	3.26	0.580	14.73	10.819	48.12	0.715	18.16	0.055	1.40	13	316 SS	CG	P
0.437	11.10	68960S	1.380	35.05	0.287	7.29	83.374	14.59	0.304	7.72	25.346	112.74	0.900	22.86	0.075	1.91	12	316 SS	CG	P
0.437	11.10	68961S	1.380	35.05	0.335	8.51	18.380	3.22	0.484	12.29	8.896	39.57	0.561	14.25	0.051	1.30	10	316 SS	C	P
0.437	11.10	68962S	1.380	35.05	0.337	8.56	13.479	2.36	0.622	15.80	8.384	37.29	0.600	15.24	0.050	1.27	12	316 SS	CG	P
0.437	11.10	68963S	1.410	35.81	0.342	8.69	8.284	1.45	0.650	16.51	5.385	23.95	0.760	19.30	0.048	1.21	15	316 SS	C	P
0.437	11.10	68964S	1.410	35.81	0.373	9.47	1.196	0.21	0.786	19.96	0.940	4.18	0.624	15.85	0.032	0.81	18.5	316 SS	C	P
0.437	11.10	68965S	1.420	36.07																




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh							
0.443	11.25	67814S	1.440	36.58	0.348	8.84	8.572	1.50	0.727	18.47	6.232	27.72	0.713	18.11	0.048	1.21	14	316 SS	C P
0.447	11.35	67815S	0.880	22.35	0.327	8.31	86.000	15.05	0.159	4.04	13.674	60.82	0.375	9.53	0.060	1.52	5.3	316 SS	C P
0.453	11.51	64140S	1.690	42.93	0.328	8.33	37.683	6.60	0.395	10.03	14.885	66.21	0.719	18.26	0.063	1.59	10.5	316 SS	C P
0.453	11.51	64141S	1.750	44.45	0.328	8.33	29.119	5.10	0.511	12.98	14.880	66.19	0.875	22.23	0.063	1.59	13	316 SS	C P
0.453	11.51	64142S	1.940	49.28	0.377	9.58	3.647	0.64	1.035	26.29	3.775	16.79	0.456	11.58	0.038	0.97	12	316 SS	CG P
0.453	11.51	67816S	0.450	11.43	0.377	9.58	20.838	3.65	0.181	4.60	3.772	16.78	0.181	4.60	0.038	0.97	3.8	316 SS	C P
0.453	11.51	67817S	0.560	14.22	0.389	9.88	7.026	1.23	0.323	8.20	2.269	10.09	0.176	4.47	0.032	0.81	4.5	316 SS	C P
0.453	11.51	67818S	0.560	14.22	0.337	8.56	76.508	13.39	0.160	4.06	12.241	54.45	0.290	7.37	0.058	1.47	5	316 SS	CG P
0.453	11.51	67819S	0.630	16.00	0.397	10.08	2.224	0.39	0.420	10.67	0.934	4.15	0.210	5.33	0.028	0.71	6.5	316 SS	C P
0.453	11.51	67820S	0.780	19.81	0.401	10.19	2.446	0.43	0.500	12.70	1.223	5.44	0.156	3.96	0.026	0.66	5	316 SS	C P
0.453	11.51	67821S	0.880	22.35	0.405	10.29	1.751	0.31	0.551	14.00	0.965	4.29	0.144	3.66	0.024	0.61	5	316 SS	C P
0.453	11.51	67822S	0.880	22.35	0.393	9.98	1.115	0.20	0.460	11.68	0.513	2.28	0.420	10.67	0.030	0.76	14	316 SS	CG P
0.453	11.51	67823S	0.910	23.11	0.405	10.29	1.751	0.31	0.551	14.00	0.965	4.29	0.144	3.66	0.024	0.61	5	316 SS	C P
0.453	11.51	67824S	0.940	23.88	0.405	10.29	1.751	0.31	0.551	14.00	0.965	4.29	0.144	3.66	0.024	0.61	5	316 SS	C P
0.453	11.51	67825S	0.940	23.88	0.405	10.29	1.751	0.31	0.551	14.00	0.965	4.29	0.144	3.66	0.024	0.61	5	316 SS	C P
0.453	11.51	67826S	1.000	25.40	0.419	10.64	0.360	0.06	0.889	22.58	0.320	1.42	0.111	2.82	0.017	0.43	5.5	316 SS	C P
0.453	11.51	67827S	1.000	25.40	0.391	9.93	3.414	0.60	0.605	15.37	2.065	9.19	0.202	5.13	0.031	0.79	6.5	316 SS	CG P
0.453	11.51	67828S	1.000	25.40	0.395	10.03	2.320	0.41	0.730	18.54	1.694	7.54	0.232	5.89	0.029	0.74	7	316 SS	C P
0.453	11.51	67829S	1.000	25.40	0.409	10.39	0.488	0.09	0.769	19.53	0.375	1.67	0.231	5.87	0.022	0.56	9.5	316 SS	C P
0.453	11.51	67830S	1.060	26.92	0.409	10.39	0.488	0.09	0.829	21.06	0.405	1.80	0.231	5.87	0.022	0.56	9.5	316 SS	C P
0.453	11.51	67831S	1.280	32.51	0.395	10.03	1.784	0.31	0.949	24.11	1.693	7.53	0.276	7.01	0.029	0.74	8.5	316 SS	C P
0.453	11.51	67832S	1.340	34.04	0.405	10.29	0.700	0.12	1.088	27.64	0.762	3.39	0.252	6.40	0.024	0.61	9.5	316 SS	C P
0.453	11.51	67833S	1.500	38.10	0.403	10.24	1.246	0.22	0.874	22.20	1.089	4.84	0.200	5.08	0.025	0.64	7	316 SS	C P
0.453	11.51	67834S	1.500	38.10	0.405	10.29	0.955	0.17	1.010	25.65	0.965	4.29	0.204	5.18	0.024	0.61	7.5	316 SS	C P
0.453	11.51	68990S	0.310	7.87	0.353	8.97	79.576	13.93	0.102	2.59	8.117	36.10	0.175	4.45	0.050	1.27	3.5	316 SS	CG P
0.453	11.51	68991S	0.380	9.65	0.371	9.42	25.254	4.42	0.175	4.45	4.419	19.66	0.205	5.21	0.041	1.04	4	316 SS	C P
0.453	11.51	68992S	0.380	9.65	0.337	8.56	153.017	26.78	0.080	2.03	12.241	54.45	0.261	6.63	0.058	1.47	3.5	316 SS	C P
0.453	11.51	68993S	0.470	11.94	0.328	8.33	106.769	18.69	0.139	3.53	14.841	66.01	0.313	7.95	0.063	1.59	5	316 SS	CG P
0.453	11.51	68994S	0.500	12.70	0.343	8.71	72.572	12.70	0.145	3.68	10.523	46.81	0.248	6.30	0.055	1.40	4.5	316 SS	CG P
0.453	11.51	68995S	0.500	12.70	0.343	8.71	55.825	9.77	0.188	4.78	10.495	46.68	0.289	7.34	0.055	1.40	5.3	316 SS	CG P
0.453	11.51	68996S	0.530	13.46	0.373	9.47	15.142	2.65	0.290	7.37	4.391	19.53	0.200	5.08	0.040	1.02	5	316 SS	CG P
0.453	11.51	68997S	0.530	13.46	0.383	9.73	10.273	1.80	0.288	7.32	2.959	13.16	0.158	4.01	0.035	0.89	4.5	316 SS	CG P
0.453	11.51	68998S	0.560	14.22	0.363	9.22	30.188	5.28	0.202	5.13	6.098	27.12	0.203	5.16	0.045	1.14	4.5	316 SS	CG P
0.453	11.51	68999S	0.560	14.22	0.345	8.76	51.485	9.01	0.197	5.00	10.143	45.12	0.284	7.21	0.054	1.37	5.3	316 SS	CG P
0.453	11.51	69000S	0.630	16.00	0.367	9.32	15.501	2.71	0.343	8.71	5.317	23.65	0.258	6.55	0.043	1.09	6	316 SS	CG P
0.453	11.51	69001S	0.630	16.00	0.381	9.68	14.477	2.53	0.222	5.64	3.214	14.30	0.144	3.66	0.036	0.91	4	316 SS	CG P
0.453	11.51	69002S	0.630	16.00	0.373	9.47	16.518	2.89	0.266	6.76	4.394	19.55	0.190	4.83	0.040	1.02	4.8	316 SS	CG P
0.453	11.51	69003S	0.660	16.76	0.319	8.10	109.493	19.16	0.166	4.22	18.176	80.85	0.402	10.21	0.067	1.70	6	316 SS	CG P
0.453	11.51	69004S	0.720	18.29	0.389	9.88	5.019	0.88	0.452	11.48	2.269	10.09	0.208	5.28	0.032	0.81	5.5	316 SS	C P
0.453	11.51	69005S	0.720	18.29	0.369	9.37	18.675	3.27	0.266	6.76	4.968	22.10	0.210	5.33	0.042	1.07	5	316 SS	CG P
0.453	11.51	69006S	0.750	19.05	0.343	8.71	45.358	7.94	0.231	5.87	10.478	46.61	0.385	9.78	0.055	1.40	6	316 SS	C P
0.453	11.51	69007S	0.750	19.05	0.371	9.42	12.627	2.21	0.374	9.50	4.722	21.00	0.287	7.29	0.041	1.04	6	316 SS	C P
0.453	11.51	69008S	0.750	19.05	0.351	8.92	26.034	4.56	0.330	8.38	8.591	38.21	0.357	9.07	0.051	1.30	7	316 SS	CG P
0.453	11.51	69009S	0.750	19.05	0.345	8.76	30.423	5.32	0.291	7.39	8.853	39.38	0.459	11.66	0.054	1.37	7.5	316 SS	C P
0.453	11.51	69010S	0.750	19.05	0.375	9.53	13.585	2.38	0.300	7.62	4.076	18.13	0.195	4.95	0.039	0.99	5	316 SS	CG P
0.453	11.51	69011S	0.750	19.05	0.333	8.46	66.723	11.68	0.203	5.16	13.545	60.25	0.360	9.14	0.060	1.52	6	316 SS	CG P
0.453	11.51	69012S	0.780	19.81	0.367	9.32	19.079	3.34	0.279	7.09	5.323	23.68	0.226	5.74	0.043	1.09	5.3	316 SS	CG P
0.453	11.51	69013S	0.810	20.57	0.345	8.76	27.888	4.88	0.324	8.23	9.036	40.19	0.486	12.34	0.054	1.37	8	316 SS	C P
0.453	11.51	69014S	0.880	22.35	0.369	9.37	14.006	2.45	0.354	8.99	4.958	22.05	0.252	6.40	0.042	1.07	6	316 SS	CG P
0.453	11.51	69015S	0.880	22.35	0.353	8.97	23.873	4.18	0.340	8.64	8.117	36.10	0.400	10.16	0.050	1.27	7	316 SS	C P
0.453	11.51	69017S	0.880	22.35	0.367	9.32	12.401	2.17	0.429	10.90	5.320	23.66	0.301	7.65	0.043	1.09	7	316 SS	CG P
0.453	11.51	69018S	0.880	22.35	0.351	8.92	21.695	3.80	0.396	10.06	8.591	38.21	0.408	10.36	0.051	1.30	8	316 SS	CG P
0.453	11.51	69019S	0.940	23.88	0.377	9.58	9.117	1.60	0.414	10.52	3.774	16.79	0.228	5.79	0.038	0.97	6	316 SS	CG P
0.453	11.51	69020S	1.000	25.40	0.371	9.42	11.884	2.08	0.397	10.08	4.718	20.99	0.256	6.50	0.041	1.04	6.3	316 SS	CG P
0.453	11.51	69021S	1.000	25.40	0.373	9.47	5.678	0.99	0.600	15.24	3.40								




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	E n d s h									
0.453	11.51	69044S	1.690	42.93	0.328	8.33	35.590	6.23	0.418	10.62	14.877	66.17	0.750	19.05	0.063	1.59	11	316 SS	C	P
0.453	11.51	69045S	1.810	45.97	0.309	7.85	43.385	7.59	0.517	13.13	22.430	99.77	1.152	29.26	0.072	1.83	16	316 SS	CG	P
0.453	11.51	69046S	1.880	47.75	0.353	8.97	11.368	1.99	0.714	18.14	8.117	36.10	0.675	17.15	0.050	1.27	12.5	316 SS	C	P
0.453	11.51	69047S	1.880	47.75	0.328	8.33	22.879	4.00	0.651	16.54	14.894	66.25	1.000	25.40	0.063	1.59	16	316 SS	CG	P
0.453	11.51	69048S	1.940	49.28	0.373	9.47	3.365	0.59	1.304	33.12	4.388	19.52	0.620	15.75	0.040	1.02	15.5	316 SS	CG	P
0.453	11.51	69049S	2.000	50.80	0.345	8.76	12.871	2.25	0.790	20.07	10.168	45.23	0.756	19.20	0.054	1.37	13	316 SS	O	P
0.453	11.51	69050S	2.130	54.10	0.345	8.76	12.125	2.12	0.839	21.31	10.173	45.25	0.907	23.04	0.054	1.37	15.8	316 SS	C	P
0.453	11.51	69052S	2.340	59.44	0.375	9.53	3.135	0.55	1.299	33.00	4.072	18.11	0.585	14.86	0.039	0.99	15	316 SS	CG	P
0.453	11.51	69053S	2.470	62.74	0.353	8.97	9.549	1.67	0.850	21.59	8.117	36.10	0.725	18.42	0.050	1.27	14.5	316 SS	CG	P
0.453	11.51	69054S	2.500	63.50	0.358	9.09	6.582	1.15	1.060	26.92	6.977	31.03	0.831	21.11	0.048	1.21	16.5	316 SS	C	P
0.453	11.51	69055S	2.500	63.50	0.293	7.44	65.774	11.51	0.451	11.46	29.664	131.95	1.360	34.54	0.080	2.03	17	316 SS	CG	P
0.453	11.51	69056S	2.500	63.50	0.353	8.97	8.526	1.49	0.952	24.18	8.117	36.10	0.850	21.59	0.050	1.27	16	316 SS	C	P
0.453	11.51	69057S	2.500	63.50	0.353	8.97	10.563	1.85	0.768	19.51	8.112	36.08	0.665	16.89	0.050	1.27	13.3	316 SS	CG	P
0.468	11.89	64143S	0.500	12.70	0.343	8.71	95.353	16.69	0.152	3.86	14.494	64.47	0.313	7.95	0.063	1.59	5	316 SS	CG	P
0.468	11.89	64144S	0.830	21.08	0.384	9.75	10.592	1.85	0.454	11.53	4.809	21.39	0.284	7.21	0.042	1.07	6.8	316 SS	CG	P
0.468	11.89	64145S	0.940	23.88	0.308	7.82	146.091	25.57	0.198	5.03	28.926	128.66	0.640	16.26	0.080	2.03	8	316 SS	CG	P
0.468	11.89	64146S	2.500	63.50	0.360	9.14	9.190	1.61	1.074	27.28	9.870	43.90	1.042	26.47	0.054	1.37	18.3	316 SS	C	P
0.468	11.89	67835S	0.530	13.46	0.343	8.71	114.424	20.02	0.126	3.20	14.417	64.13	0.281	7.14	0.063	1.59	4.5	316 SS	CG	P
0.468	11.89	67836S	0.750	19.05	0.408	10.36	3.443	0.60	0.527	13.39	1.814	8.07	0.195	4.95	0.030	0.76	5.5	316 SS	C	P
0.468	11.89	67837S	0.780	19.81	0.416	10.57	2.405	0.42	0.493	12.52	1.186	5.28	0.150	3.81	0.026	0.66	4.8	316 SS	C	P
0.468	11.89	67838S	0.830	21.08	0.416	10.57	2.205	0.39	0.538	13.67	1.186	5.28	0.156	3.96	0.026	0.66	5	316 SS	C	P
0.468	11.89	67839S	0.880	22.35	0.412	10.47	2.577	0.45	0.574	14.58	1.479	6.58	0.182	4.62	0.028	0.71	5.5	316 SS	C	P
0.468	11.89	67840S	0.940	23.88	0.406	10.31	2.767	0.48	0.723	18.36	2.001	8.90	0.217	5.51	0.031	0.79	7	316 SS	CG	P
0.468	11.89	67841S	0.940	23.88	0.404	10.26	3.954	0.69	0.556	14.12	2.198	9.78	0.224	5.69	0.032	0.81	6	316 SS	C	P
0.468	11.89	67842S	1.000	25.40	0.410	10.41	1.900	0.33	0.753	19.13	1.431	6.37	0.247	6.27	0.029	0.74	7.5	316 SS	C	P
0.468	11.89	67843S	1.000	25.40	0.408	10.36	2.835	0.50	0.640	16.26	1.814	8.07	0.218	5.54	0.030	0.76	7.5	316 SS	C	P
0.468	11.89	67844S	1.000	25.40	0.408	10.36	2.410	0.42	0.753	19.13	1.815	8.07	0.240	6.10	0.030	0.76	7	316 SS	C	P
0.468	11.89	67846S	1.130	28.70	0.348	8.84	39.754	6.96	0.330	8.38	13.119	58.35	0.480	12.19	0.060	1.52	8	316 SS	CG	P
0.468	11.89	67847S	1.160	29.46	0.408	10.36	2.008	0.35	0.890	22.61	1.787	7.95	0.270	6.86	0.030	0.76	8	316 SS	C	P
0.468	11.89	67849S	1.250	31.75	0.386	9.80	4.321	0.76	0.737	18.72	3.185	14.17	0.513	13.03	0.041	1.04	12.5	316 SS	CG	P
0.468	11.89	67850S	1.250	31.75	0.436	11.07	0.051	0.01	0.922	23.42	0.047	0.21	0.328	8.33	0.016	0.41	19.5	316 SS	C	P
0.468	11.89	67851S	1.380	35.05	0.416	10.57	0.980	0.17	1.152	29.26	1.129	5.02	0.228	5.79	0.026	0.66	8.8	316 SS	CG	P
0.468	11.89	67852S	1.750	44.45	0.318	8.08	59.236	10.37	0.403	10.24	23.872	106.18	0.975	24.77	0.075	1.91	13	316 SS	CG	P
0.468	11.89	67854S	1.810	45.97	0.324	8.23	49.177	8.61	0.443	11.25	21.785	96.90	0.936	23.77	0.072	1.83	13	316 SS	CG	P
0.468	11.89	67855S	2.000	50.80	0.338	8.59	34.092	5.97	0.475	12.07	16.194	72.03	0.780	19.81	0.065	1.65	12	316 SS	CG	P
0.468	11.89	67856S	2.000	50.80	0.373	9.47	7.780	1.36	0.870	22.10	6.769	30.11	0.618	15.70	0.048	1.21	13	316 SS	CG	P
0.468	11.89	69058S	0.440	11.18	0.358	9.09	162.372	28.42	0.063	1.60	10.229	45.50	0.165	4.19	0.055	1.40	3	316 SS	CG	P
0.468	11.89	69059S	0.560	14.22	0.384	9.75	33.542	5.87	0.143	3.63	4.797	21.34	0.189	4.80	0.042	1.07	3.5	316 SS	C	P
0.468	11.89	69060S	0.590	14.99	0.400	10.16	10.217	1.79	0.258	6.55	2.636	11.73	0.136	3.45	0.034	0.86	4	316 SS	CG	P
0.468	11.89	69061S	0.690	17.53	0.400	10.16	6.811	1.19	0.386	9.80	2.629	11.69	0.204	5.18	0.034	0.86	5	316 SS	C	P
0.468	11.89	69062S	0.690	17.53	0.382	9.70	18.556	3.25	0.278	7.06	5.159	22.95	0.215	5.46	0.043	1.09	5	316 SS	CG	P
0.468	11.89	69063S	0.750	19.05	0.390	9.91	10.465	1.83	0.377	9.58	3.945	17.55	0.215	5.46	0.039	0.99	5.5	316 SS	CG	P
0.468	11.89	69064S	0.810	20.57	0.384	9.75	6.289	1.10	0.390	9.91	2.453	10.91	0.420	10.67	0.042	1.07	10	316 SS	CG	P
0.468	11.89	69065S	0.880	22.35	0.308	7.82	184.536	32.29	0.156	3.96	28.788	128.05	0.540	13.72	0.080	2.03	6.8	316 SS	CG	P
0.468	11.89	69066S	0.910	23.11	0.360	9.14	24.965	4.37	0.395	10.03	9.861	43.86	0.432	10.97	0.054	1.37	8	316 SS	CG	P
0.468	11.89	69067S	0.940	23.88	0.366	9.30	19.437	3.40	0.429	10.90	8.338	37.09	0.408	10.36	0.051	1.30	8	316 SS	CG	P
0.468	11.89	69068S	0.940	23.88	0.343	8.71	47.677	8.34	0.303	7.70	14.446	64.26	0.500	12.70	0.063	1.59	8	316 SS	CG	P
0.468	11.89	69069S	0.970	24.64	0.324	8.23	90.158	15.78	0.242	6.15	21.818	97.05	0.576	14.63	0.072	1.83	8	316 SS	CG	P
0.468	11.89	69071S	1.000	25.40	0.358	9.09	29.522	5.17	0.345	8.76	10.185	45.30	0.413	10.49	0.055	1.40	7.5	316 SS	CG	P
0.468	11.89	69072S	1.000	25.40	0.338	8.59	61.985	10.85	0.261	6.63	16.178	71.96	0.488	12.40	0.065	1.65	7.5	316 SS	CG	P
0.468	11.89	69073S	1.000	25.40	0.324	8.23	98.354	17.21	0.222	5.64	21.835	97.12	0.540	13.72	0.072	1.83	7.5	316 SS	CG	P
0.468	11.89	69074S	1.030	26.16	0.368	9.35	15.281	2.67	0.515	13.08	7.870	35.01	0.450	11.43	0.050	1.27	9	316 SS	C	P
0.468	11.89	69075S	1.060	26.92	0.343	8.71	63.569	11.13	0.227	5.77	14.430	64.19	0.406	10.31	0.063	1.59	6.5	316 SS	CG	P
0.468	11.89	69076S																		




316 Stainless Steel Compression Springs

O.D. Inches	Century Stock Number	Free Length Inches	I.D. Inches	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F n sh								
0.468	11.89	69100S	1.530	38.86	0.348	8.84	23.853	4.17	0.550	13.97	13.119	58.35	0.720	18.29	0.060	1.52	12	316 SS	CG	P
0.468	11.89	69103S	1.630	41.40	0.384	9.75	5.590	0.98	0.860	21.84	4.807	21.38	0.462	11.74	0.042	1.07	11	316 SS	CG	P
0.468	11.89	69104S	1.670	42.42	0.368	9.35	10.697	1.87	0.735	18.67	7.862	34.97	0.600	15.24	0.050	1.27	12	316 SS	CG	P
0.468	11.89	69105S	1.690	42.93	0.388	9.86	7.098	1.24	0.600	15.24	4.259	18.94	0.350	8.89	0.040	1.02	7.8	316 SS	C	P
0.468	11.89	69106S	1.750	44.45	0.388	9.86	3.887	0.68	1.095	27.81	4.256	18.93	0.540	13.72	0.040	1.02	12.5	316 SS	C	P
0.468	11.89	69107S	1.750	44.45	0.338	8.59	26.224	4.59	0.618	15.70	16.206	72.08	1.040	26.42	0.065	1.65	15	316 SS	C	P
0.468	11.89	69108S	1.940	49.28	0.388	9.86	4.081	0.71	1.043	26.49	4.256	18.93	0.480	12.19	0.040	1.02	12	316 SS	CG	P
0.468	11.89	69109S	2.060	52.32	0.334	8.48	39.064	6.84	0.453	11.51	17.696	78.71	0.871	22.12	0.067	1.70	12	316 SS	C	P
0.468	11.89	69110S	2.130	54.10	0.360	9.14	11.096	1.94	0.889	22.58	9.864	43.88	0.891	22.63	0.054	1.37	15.5	316 SS	C	P
0.468	11.89	69111S	2.340	59.44	0.308	7.82	55.478	9.71	0.521	13.23	28.904	128.57	1.424	36.17	0.080	2.03	17.8	316 SS	CG	P
0.468	11.89	69112S	2.410	61.21	0.308	7.82	53.124	9.30	0.542	13.77	28.793	128.07	1.480	37.59	0.080	2.03	18.5	316 SS	CG	P
0.468	11.89	69113S	2.500	63.50	0.388	9.86	2.815	0.49	1.512	38.41	4.256	18.93	0.660	16.76	0.040	1.02	16.5	316 SS	CG	P
0.468	11.89	69114S	2.500	63.50	0.343	8.71	20.433	3.58	0.707	17.96	14.446	64.26	1.063	27.00	0.063	1.59	16	316 SS	C	P
0.480	12.19	67857S	0.660	16.76	0.385	9.78	31.462	5.51	0.210	5.33	6.607	29.39	0.214	5.44	0.048	1.21	4.5	316 SS	CG	P
0.480	12.19	69115S	0.730	18.54	0.394	10.01	11.380	1.99	0.407	10.34	4.632	20.60	0.323	8.20	0.043	1.09	6.5	316 SS	C	P
0.484	12.29	64147S	0.410	10.41	0.374	9.50	57.949	10.14	0.162	4.12	9.388	41.76	0.248	6.30	0.055	1.40	4.5	316 SS	CG	P
0.484	12.29	64148S	0.560	14.22	0.374	9.50	72.437	12.68	0.136	3.45	9.851	43.82	0.275	6.99	0.055	1.40	4	316 SS	C	P
0.484	12.29	64149S	0.810	20.57	0.350	8.89	69.475	12.16	0.247	6.27	17.160	76.33	0.469	11.91	0.067	1.70	7	316 SS	CG	P
0.484	12.29	64151S	1.340	34.04	0.340	8.64	68.620	12.01	0.308	7.82	21.135	94.01	0.648	16.46	0.072	1.83	9	316 SS	CG	P
0.484	12.29	64152S	1.380	35.05	0.340	8.64	48.034	8.41	0.440	11.18	21.135	94.01	0.864	21.95	0.072	1.83	12	316 SS	CG	P
0.484	12.29	64153S	1.470	37.34	0.354	8.99	30.333	5.31	0.518	13.16	15.712	69.89	0.780	19.81	0.065	1.65	12	316 SS	CG	P
0.484	12.29	64154S	1.500	38.10	0.376	9.55	14.854	2.60	0.644	16.36	9.566	42.55	0.594	15.09	0.054	1.37	11	316 SS	CG	P
0.484	12.29	64155S	2.000	50.80	0.340	8.64	40.028	7.01	0.528	13.41	21.135	94.01	1.008	25.60	0.072	1.83	14	316 SS	CG	P
0.484	12.29	67858S	0.310	7.87	0.424	10.77	10.820	1.89	0.162	4.12	1.753	7.80	0.090	2.29	0.030	0.76	3	316 SS	CG	P
0.484	12.29	67859S	0.500	12.70	0.428	10.87	5.402	0.95	0.265	6.73	1.432	6.37	0.098	2.49	0.028	0.71	3.5	316 SS	CG	P
0.484	12.29	67860S	0.500	12.70	0.374	9.50	57.949	10.14	0.170	4.32	9.851	43.82	0.248	6.30	0.055	1.40	4.5	316 SS	CG	P
0.484	12.29	67861S	0.560	14.22	0.408	10.36	14.690	2.57	0.241	6.12	3.540	15.75	0.190	4.83	0.038	0.97	4	316 SS	C	P
0.484	12.29	67862S	0.630	16.00	0.374	9.50	57.949	10.14	0.170	4.32	9.851	43.82	0.248	6.30	0.055	1.40	4.5	316 SS	CG	P
0.484	12.29	67863S	0.690	17.53	0.436	11.07	3.204	0.56	0.282	7.16	0.904	4.02	0.104	2.64	0.024	0.61	3.3	316 SS	C	P
0.484	12.29	67864S	0.750	19.05	0.340	8.64	120.085	21.02	0.176	4.47	21.135	94.01	0.432	10.97	0.072	1.83	6	316 SS	CG	P
0.484	12.29	67865S	0.810	20.57	0.428	10.87	3.241	0.57	0.442	11.23	1.433	6.37	0.154	3.91	0.028	0.71	4.5	316 SS	C	P
0.484	12.29	67866S	0.840	21.34	0.424	10.77	2.705	0.47	0.630	16.00	1.704	7.58	0.210	5.33	0.030	0.76	6	316 SS	C	P
0.484	12.29	67867S	0.880	22.35	0.448	11.38	0.216	0.04	0.718	18.24	0.155	0.69	0.162	4.12	0.018	0.46	8	316 SS	C	P
0.484	12.29	67868S	1.000	25.40	0.394	10.01	15.146	2.65	0.377	9.58	5.710	25.40	0.270	6.86	0.045	1.14	6	316 SS	CG	P
0.484	12.29	67869S	1.530	38.86	0.432	10.97	0.425	0.07	1.088	27.64	0.462	2.06	0.442	11.23	0.026	0.66	16	316 SS	C	P
0.484	12.29	67870S	2.440	61.98	0.389	9.88	8.054	1.41	0.814	20.68	6.556	29.16	0.594	15.09	0.048	1.21	11.5	316 SS	C	P
0.484	12.29	69116S	0.250	6.35	0.389	9.88	76.512	13.39	0.086	2.18	6.580	29.27	0.143	3.63	0.048	1.21	3	316 SS	CG	P
0.484	12.29	69117S	0.340	8.64	0.389	9.88	76.512	13.39	0.086	2.18	6.580	29.27	0.143	3.63	0.048	1.21	3	316 SS	CG	P
0.484	12.29	69118S	0.410	10.41	0.376	9.55	89.123	15.60	0.107	2.72	9.536	42.42	0.189	4.80	0.054	1.37	3.5	316 SS	CG	P
0.484	12.29	69119S	0.410	10.41	0.364	9.25	141.686	24.80	0.090	2.29	12.752	56.72	0.210	5.33	0.060	1.52	3.5	316 SS	CG	P
0.484	12.29	69120S	0.470	11.94	0.374	9.50	57.949	10.14	0.170	4.32	9.851	43.82	0.248	6.30	0.055	1.40	4.5	316 SS	CG	P
0.484	12.29	69121S	0.470	11.94	0.404	10.26	14.624	2.56	0.250	6.35	3.656	16.26	0.220	5.59	0.040	1.02	4.5	316 SS	C	P
0.484	12.29	69122S	0.500	12.70	0.376	9.55	53.474	9.36	0.179	4.55	9.572	42.58	0.243	6.17	0.054	1.37	4.5	316 SS	CG	P
0.484	12.29	69123S	0.500	12.70	0.382	9.70	34.722	6.08	0.233	5.92	8.090	35.98	0.255	6.48	0.051	1.30	5	316 SS	CG	P
0.484	12.29	69124S	0.560	14.22	0.389	9.88	25.504	4.46	0.257	6.53	6.555	29.16	0.285	7.24	0.048	1.21	5	316 SS	C	P
0.484	12.29	69125S	0.590	14.99	0.420	10.67	2.839	0.50	0.366	9.30	1.039	4.62	0.224	5.69	0.032	0.81	7	316 SS	CG	P
0.484	12.29	69126S	0.630	16.00	0.384	9.75	38.228	6.69	0.199	5.06	7.607	33.84	0.225	5.72	0.050	1.27	4.5	316 SS	CG	P
0.484	12.29	69127S	0.630	16.00	0.384	9.75	27.306	4.78	0.279	7.09	7.618	33.89	0.275	6.99	0.050	1.27	5.5	316 SS	CG	P
0.484	12.29	69128S	0.750	19.05	0.359	9.12	59.931	10.49	0.234	5.94	14.024	62.38	0.391	9.93	0.063	1.59	6.3	316 SS	CG	P
0.484	12.29	69129S	0.750	19.05	0.376	9.55	33.421	5.85	0.286	7.26	9.558	42.51	0.324	8.23	0.054	1.37	6	316 SS	CG	P
0.484	12.29	69130S	0.780	19.81	0.334	8.48	248.101	43.42	0.094	2.39	23.321	103.73	0.325	8.26	0.075	1.91	4.3	316 SS	CG	P
0.484	12.29	69131S	0.840	21.34	0.348	8.84	87.353	15.29	0.205	5.21	17.907	79.65	0.425	10.80	0.068	1.73	6.3	316 SS	CG	P
0.484	12.29	69132S	0.880	22.35	0.359	9.12	42.451	7.43	0.330	8.38	14.009	62.31	0.500	12.70	0.063	1.59	8	316 SS	CG	P
0.484	12.29	69133S	0.910	23.11	0.420	10.67														




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length		I.D.		Rate		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length		Wire Dia. Inches mm		Total Coils	E n d s h	
		Inches	mm	Inches	mm	Lbs./In.	N/mm			Inches	mm	Mat'l				
0.484	12.29	69158S	1.380	35.05	0.334	8.48	57.808	10.12	0.403	10.24	23.297	103.63	0.900	22.86	0.075	1.91
0.484	12.29	69160S	1.410	35.81	0.416	10.57	2.820	0.49	0.903	22.94	2.546	11.33	0.289	7.34	0.034	0.86
0.484	12.29	69161S	1.440	36.58	0.394	10.01	13.463	2.36	0.424	10.77	5.708	25.39	0.293	7.44	0.045	1.14
0.484	12.29	69162S	1.440	36.58	0.394	10.01	10.098	1.77	0.566	14.38	5.715	25.42	0.405	10.29	0.045	1.14
0.484	12.29	69163S	1.500	38.10	0.408	10.36	5.876	1.03	0.602	15.29	3.537	15.73	0.266	6.76	0.038	0.97
0.484	12.29	69164S	1.500	38.10	0.340	8.64	54.584	9.55	0.387	9.83	21.124	93.96	0.778	19.76	0.072	1.83
0.484	12.29	69165S	1.500	38.10	0.408	10.36	3.672	0.64	0.964	24.49	3.540	15.75	0.418	10.62	0.038	0.97
0.484	12.29	69166S	1.500	38.10	0.404	10.26	5.850	1.02	0.704	17.88	4.118	18.32	0.370	9.40	0.040	1.02
0.484	12.29	69167S	1.500	38.10	0.389	9.88	12.752	2.23	0.514	13.06	6.555	29.16	0.380	9.65	0.048	1.21
0.484	12.29	69168S	1.500	38.10	0.364	9.25	17.711	3.10	0.660	16.76	11.689	51.99	0.840	21.34	0.060	1.52
0.484	12.29	69169S	1.500	38.10	0.359	9.12	31.838	5.57	0.440	11.18	14.009	62.31	0.625	15.88	0.063	1.59
0.484	12.29	69170S	1.500	38.10	0.368	9.35	20.331	3.56	0.567	14.40	11.528	51.28	0.696	17.68	0.058	1.47
0.484	12.29	69171S	1.500	38.10	0.364	9.25	26.566	4.65	0.479	12.17	12.725	56.60	0.600	15.24	0.060	1.52
0.484	12.29	69173S	1.560	39.62	0.374	9.50	13.797	2.41	0.715	18.16	9.865	43.88	0.688	17.48	0.055	1.40
0.484	12.29	69174S	1.590	40.39	0.374	9.50	13.797	2.41	0.715	18.16	9.865	43.88	0.688	17.48	0.055	1.40
0.484	12.29	69175S	1.630	41.40	0.404	10.26	6.964	1.22	0.592	15.04	4.123	18.34	0.290	7.37	0.040	1.02
0.484	12.29	69176S	1.630	41.40	0.359	9.12	29.965	5.24	0.467	11.86	13.994	62.25	0.656	16.66	0.063	1.59
0.484	12.29	69177S	1.630	41.40	0.324	8.23	73.950	12.94	0.379	9.63	28.027	124.66	1.000	25.40	0.080	2.03
0.484	12.29	69178S	1.690	42.93	0.359	9.12	25.990	4.55	0.539	13.69	14.009	62.31	0.800	20.32	0.063	1.59
0.484	12.29	69179S	1.690	42.93	0.408	10.36	5.876	1.03	0.602	15.29	3.537	15.73	0.304	7.72	0.038	0.97
0.484	12.29	69182S	1.750	44.45	0.359	9.12	21.225	3.71	0.660	16.76	14.009	62.31	0.938	23.83	0.063	1.59
0.484	12.29	69183S	1.750	44.45	0.324	8.23	97.059	16.99	0.289	7.34	28.050	124.77	0.800	20.32	0.080	2.03
0.484	12.29	69184S	1.810	45.97	0.376	9.55	16.711	2.92	0.572	14.53	9.559	42.52	0.594	15.09	0.054	1.37
0.484	12.29	69185S	1.810	45.97	0.389	9.88	6.956	1.22	0.942	23.93	6.553	29.15	0.618	15.70	0.048	1.21
0.484	12.29	69186S	1.810	45.97	0.359	9.12	25.470	4.46	0.550	13.97	14.009	62.31	0.750	19.05	0.063	1.59
0.484	12.29	69187S	1.840	46.74	0.354	8.99	30.333	5.31	0.518	13.16	15.712	69.89	0.845	21.46	0.065	1.65
0.484	12.29	69188S	1.880	47.75	0.376	9.55	13.368	2.34	0.716	18.19	9.571	42.57	0.648	16.46	0.054	1.37
0.484	12.29	69189S	1.880	47.75	0.359	9.12	25.470	4.46	0.550	13.97	14.009	62.31	0.813	20.65	0.063	1.59
0.484	12.29	69190S	2.000	50.80	0.348	8.84	26.518	4.64	0.675	17.15	17.900	79.62	1.088	27.64	0.068	1.73
0.484	12.29	69191S	2.060	52.32	0.359	9.12	21.585	3.78	0.649	16.49	14.009	62.31	0.863	21.92	0.063	1.59
0.484	12.29	69192S	2.190	55.63	0.389	9.88	5.170	0.91	1.268	32.21	6.556	29.16	0.798	20.27	0.048	1.21
0.484	12.29	69193S	2.250	57.15	0.394	10.01	5.770	1.01	0.991	25.17	5.718	25.43	0.563	14.30	0.045	1.14
0.484	12.29	69194S	2.250	57.15	0.400	10.16	5.005	0.88	0.931	23.65	4.660	20.73	0.462	11.74	0.042	1.07
0.484	12.29	69195S	2.440	61.98	0.359	9.12	19.593	3.43	0.715	18.16	14.009	62.31	0.938	23.83	0.063	1.59
0.484	12.29	69196S	2.500	63.50	0.359	9.12	17.566	3.07	0.797	20.24	14.000	62.27	1.094	27.79	0.063	1.59
0.484	12.29	69197S	2.500	63.50	0.324	8.23	48.530	8.49	0.577	14.66	28.002	124.55	1.440	36.58	0.080	2.03
0.484	12.29	69198S	2.500	63.50	0.376	9.55	7.957	1.39	1.202	30.53	9.564	42.54	1.069	27.15	0.054	1.37
0.492	12.50	67871S	0.970	24.64	0.402	10.21	11.478	2.01	0.490	12.45	5.624	25.02	0.315	8.00	0.045	1.14
0.500	12.70	64156S	0.630	16.00	0.375	9.53	113.885	19.93	0.119	3.02	13.552	60.28	0.250	6.35	0.063	1.59
0.500	12.70	64157S	0.630	16.00	0.392	9.96	47.923	8.39	0.194	4.93	9.297	41.35	0.297	7.54	0.054	1.45
0.500	12.70	64158S	0.660	16.76	0.392	9.96	53.247	9.32	0.174	4.42	9.265	41.21	0.284	7.21	0.054	1.37
0.500	12.70	64159S	0.750	19.05	0.398	10.11	19.668	3.44	0.398	10.11	7.828	34.82	0.344	8.74	0.051	1.30
0.500	12.70	64160S	1.000	25.40	0.405	10.29	11.447	2.00	0.555	14.10	6.353	28.26	0.380	9.65	0.048	1.21
0.500	12.70	64161S	1.000	25.40	0.356	9.04	7.1410	12.50	0.287	7.29	20.495	91.16	0.576	14.63	0.072	1.83
0.500	12.70	64162S	1.000	25.40	0.375	9.53	39.612	6.93	0.343	8.71	13.587	60.44	0.547	13.89	0.063	1.59
0.500	12.70	64163S	1.130	28.70	0.375	9.53	29.390	5.14	0.463	11.76	13.608	60.53	0.609	15.47	0.063	1.59
0.500	12.70	64164S	1.380	35.05	0.356	9.04	50.407	8.82	0.407	10.34	20.516	91.26	0.828	21.03	0.072	1.83
0.500	12.70	64165S	1.500	38.10	0.398	10.11	8.897	1.56	0.862	21.90	7.669	34.11	0.638	16.21	0.051	1.30
0.500	12.70	64166S	1.500	38.10	0.418	10.62	4.566	0.80	0.941	23.90	4.297	19.11	0.451	11.46	0.041	1.04
0.500	12.70	64167S	1.750	44.45	0.356	9.04	37.917	6.64	0.541	13.74	20.513	91.24	1.030	26.16	0.072	1.83
0.500	12.70	64168S	1.750	44.45	0.375	9.53	21.090	3.69	0.645	16.38	13.603	60.51	0.863	21.92	0.063	1.59
0.500	12.70	64169S	1.880	47.75	0.398	10.11	7.186	1.26	1.090	27.69	7.833	34.84	0.765	19.43	0.051	1.30
0.500	12.70	64170S	1.880	47.75	0.405	10.29	5.723	1.00	1.110	28.19	6.353	28.26	0.713	18.11	0.048	1.21
0.500	12.70	64171S	2.000	50.80	0.405	10.29	6.541	1.15	0.972	24.69	6.358	28.28	0.641	16.28	0.048	1.21
0.500	12.70	64172S	2.000	50.80	0.405	10.29	5.283	0.93	1.203	30.56	6.355	28.27	0.760	19.30	0.048	1.21
0.500	12.70	64173S	2.000	50.80	0.356	9.04	32.958	5.77	0.622	15.80	20.500	91.18	1.152	29.26	0.072	1.83
0.500	12.70	64174S	2.310	58.67	0.356	9.04	27.642	4.84	0.742	18.85	20.510	91.23	1.260	32.00	0.072	1.83
0.500	12.70	64175S	2.310	58.67	0.356	9.04	50.407	8.82	0.407	10.34	20.516	91.26	0.756	19.20	0.072	1.83
0.500	12.70	64176S	2.500	63.50	0.375	9.53	14.236	2.49	0.955	24.26	13.595	60.47	1.188	30.18	0.063	1.59
0.500	12.70	67872S	0.380	9.65	0.464	11.79	0.391	0.07	0.272	6.91	0.106	0.47	0.108	2.74	0.018	0.46
0.500	1															




316 Stainless Steel Compression Springs

O.D. Inches mm	Century Stock Number	Free Length Inches mm	I.D. Inches mm	Rate Lbs./In. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm	Wire Dia. Inches mm	Total Coils	Mat'l	Ends	F nsh								
0.500	12.70	67890S	1.000	25.40	0.424	10.77	7.552	1.32	0.455	11.56	3.436	15.28	0.247	6.27	0.038	0.97	5.5	316 SS	C	P
0.500	12.70	67891S	1.130	28.70	0.440	11.18	0.813	0.14	0.680	17.27	0.553	2.46	0.450	11.43	0.030	0.76	14	316 SS	C	P
0.500	12.70	67892S	1.170	29.72	0.405	10.29	11.447	2.00	0.555	14.10	6.353	28.26	0.380	9.65	0.048	1.21	8	316 SS	CG	P
0.500	12.70	67893S	1.190	30.23	0.448	11.38	1.073	0.19	0.982	24.94	1.054	4.69	0.208	5.28	0.026	0.66	7	316 SS	C	P
0.500	12.70	67894S	1.220	30.99	0.440	11.18	1.219	0.21	0.920	23.37	1.121	4.99	0.300	7.62	0.030	0.76	10	316 SS	CG	P
0.500	12.70	67895S	1.250	31.75	0.375	9.53	32.539	5.69	0.418	10.62	13.601	60.50	0.625	15.88	0.063	1.59	9	316 SS	C	P
0.500	12.70	67896S	1.250	31.75	0.442	11.23	0.846	0.15	0.873	22.17	0.739	3.29	0.377	9.58	0.029	0.74	12	316 SS	C	P
0.500	12.70	67897S	1.250	31.75	0.440	11.18	2.786	0.49	0.611	15.52	1.702	7.57	0.195	4.95	0.030	0.76	5.5	316 SS	C	P
0.500	12.70	67898S	1.310	33.27	0.440	11.18	1.219	0.21	1.010	25.65	1.231	5.48	0.300	7.62	0.030	0.76	10	316 SS	CG	P
0.500	12.70	67899S	1.380	35.05	0.448	11.38	0.670	0.12	1.094	27.79	0.733	3.26	0.286	7.26	0.026	0.66	10	316 SS	C	P
0.500	12.70	67900S	1.380	35.05	0.456	11.58	0.315	0.06	1.127	28.63	0.355	1.58	0.253	6.43	0.022	0.56	10.5	316 SS	C	P
0.500	12.70	67901S	1.440	36.58	0.450	11.43	0.759	0.13	1.215	30.86	0.922	4.10	0.225	5.72	0.025	0.64	8	316 SS	C	P
0.500	12.70	67902S	1.630	41.40	0.440	11.18	1.625	0.28	1.047	26.59	1.701	7.57	0.240	6.10	0.030	0.76	8	316 SS	CG	P
0.500	12.70	67903S	1.750	44.45	0.420	10.67	2.989	0.52	1.190	30.23	3.557	15.82	0.560	14.22	0.040	1.02	13	316 SS	C	P
0.500	12.70	67904S	1.910	48.51	0.440	11.18	1.219	0.21	1.396	35.46	1.702	7.57	0.300	7.62	0.030	0.76	10	316 SS	CG	P
0.500	12.70	67905S	1.920	48.77	0.438	11.13	1.399	0.25	1.341	34.06	1.876	8.34	0.310	7.87	0.031	0.79	10	316 SS	CG	P
0.500	12.70	67906S	2.030	51.56	0.464	11.79	0.095	0.02	1.755	44.58	0.167	0.74	0.275	6.99	0.018	0.46	14.3	316 SS	C	P
0.500	12.70	67907S	2.060	52.32	0.328	8.33	83.792	14.66	0.390	9.91	32.679	145.36	1.161	29.49	0.086	2.18	13.5	316 SS	CG	P
0.500	12.70	67908S	2.130	54.10	0.400	10.16	10.717	1.88	0.690	17.53	7.395	32.89	0.500	12.70	0.050	1.27	10	316 SS	CG	P
0.500	12.70	67909S	2.500	63.50	0.424	10.77	2.643	0.46	1.299	33.00	3.433	15.27	0.494	12.55	0.038	0.97	12	316 SS	C	P
0.500	12.70	69199S	0.250	6.35	0.400	10.16	85.734	15.00	0.086	2.18	7.373	32.80	0.150	3.81	0.050	1.27	3	316 SS	CG	P
0.500	12.70	69200S	0.380	9.65	0.400	10.16	85.734	15.00	0.086	2.18	7.373	32.80	0.200	5.08	0.050	1.27	3	316 SS	C	P
0.500	12.70	69201S	0.380	9.65	0.356	9.04	428.458	74.98	0.048	1.22	20.566	91.48	0.288	7.32	0.072	1.83	3	316 SS	C	P
0.500	12.70	69202S	0.440	11.18	0.384	9.75	81.908	14.33	0.136	3.45	11.139	49.55	0.232	5.89	0.058	1.47	4	316 SS	CG	P
0.500	12.70	69203S	0.500	12.70	0.432	10.97	16.507	2.89	0.150	3.81	2.476	11.01	0.136	3.45	0.034	0.86	3	316 SS	C	P
0.500	12.70	69204S	0.500	12.70	0.400	10.16	34.294	6.00	0.216	5.49	7.408	32.95	0.225	5.72	0.050	1.27	4.5	316 SS	CG	P
0.500	12.70	69205S	0.500	12.70	0.430	10.92	9.328	1.63	0.288	7.32	2.686	11.95	0.140	3.56	0.035	0.89	4	316 SS	CG	P
0.500	12.70	69206S	0.530	13.46	0.398	10.11	31.141	5.45	0.224	5.69	6.976	31.03	0.306	7.77	0.051	1.30	5	316 SS	C	P
0.500	12.70	69208S	0.560	14.22	0.380	9.65	47.544	8.32	0.200	5.08	9.509	42.30	0.360	9.14	0.060	1.52	6	316 SS	CG	P
0.500	12.70	69209S	0.560	14.22	0.420	10.67	14.611	2.56	0.273	6.93	3.989	17.74	0.170	4.32	0.040	1.02	4.3	316 SS	CG	P
0.500	12.70	69210S	0.560	14.22	0.416	10.57	20.243	3.54	0.223	5.66	4.514	20.08	0.210	5.33	0.042	1.07	4	316 SS	C	P
0.500	12.70	69211S	0.560	14.22	0.314	7.98	554.777	97.09	0.072	1.83	39.944	177.67	0.419	10.64	0.093	2.36	4.5	316 SS	CG	P
0.500	12.70	69212S	0.590	14.99	0.410	10.41	18.139	3.17	0.305	7.75	5.532	24.61	0.225	5.72	0.045	1.14	5	316 SS	CG	P
0.500	12.70	69213S	0.610	15.49	0.420	10.67	16.438	2.88	0.243	6.17	3.994	17.77	0.160	4.06	0.040	1.02	4	316 SS	CG	P
0.500	12.70	69214S	0.630	16.00	0.370	9.40	108.432	18.98	0.141	3.58	15.289	68.01	0.293	7.44	0.065	1.65	4.5	316 SS	CG	P
0.500	12.70	69215S	0.630	16.00	0.416	10.57	13.496	2.36	0.335	8.51	4.521	20.11	0.252	6.40	0.042	1.07	5	316 SS	C	P
0.500	12.70	69216S	0.630	16.00	0.410	10.41	27.208	4.76	0.204	5.18	5.550	24.69	0.180	4.57	0.045	1.14	4	316 SS	CG	P
0.500	12.70	69217S	0.630	16.00	0.420	10.67	10.959	1.92	0.365	9.27	4.000	17.79	0.240	6.10	0.040	1.02	5	316 SS	C	P
0.500	12.70	69218S	0.630	16.00	0.420	10.67	13.150	2.30	0.304	7.72	3.998	17.78	0.180	4.57	0.040	1.02	4.5	316 SS	CG	P
0.500	12.70	69219S	0.630	16.00	0.424	10.77	10.573	1.85	0.325	8.26	3.436	15.28	0.171	4.34	0.038	0.97	4.5	316 SS	CG	P
0.500	12.70	69220S	0.690	17.53	0.370	9.40	120.479	21.08	0.127	3.23	15.301	68.06	0.276	7.01	0.065	1.65	4.3	316 SS	CG	P
0.500	12.70	69221S	0.690	17.53	0.320	8.13	297.487	52.06	0.125	3.18	37.186	165.40	0.540	13.72	0.090	2.29	6	316 SS	CG	P
0.500	12.70	69222S	0.720	18.29	0.375	9.53	75.923	13.29	0.179	4.55	13.590	60.45	0.375	9.53	0.063	1.59	5	316 SS	C	P
0.500	12.70	69224S	0.720	18.29	0.424	10.77	10.573	1.85	0.325	8.26	3.436	15.28	0.171	4.34	0.038	0.97	4.5	316 SS	CG	P
0.500	12.70	69225S	0.720	18.29	0.416	10.57	17.994	3.15	0.251	6.38	4.516	20.09	0.179	4.55	0.042	1.07	4.3	316 SS	CG	P
0.500	12.70	69227S	0.750	19.05	0.405	10.29	22.893	4.01	0.278	7.06	6.364	28.31	0.238	6.05	0.048	1.21	5	316 SS	CG	P
0.500	12.70	69228S	0.750	19.05	0.392	9.96	39.936	6.99	0.232	5.89	9.265	41.21	0.270	6.86	0.054	1.37	5	316 SS	CG	P
0.500	12.70	69229S	0.750	19.05	0.392	9.96	29.952	5.24	0.310	7.87	9.285	41.30	0.378	9.60	0.054	1.37	6	316 SS	C	P
0.500	12.70	69230S	0.750	19.05	0.340	8.64	172.768	30.23	0.158	4.01	27.297	121.42	0.480	12.19	0.080	2.03	6	316 SS	CG	P
0.500	12.70	69231S	0.750	19.05	0.370	9.40	72.288	12.65	0.211	5.36	15.253	67.85	0.374	9.50	0.065	1.65	5.8	316 SS	CG	P
0.500	12.70	69232S	0.750	19.05	0.390	9.91	43.267	7.57	0.221	5.61	9.562	42.53	0.275	6.99	0.055	1.40	5	316 SS	CG	P
0.500	12.70	69233S	0.750	19.05	0.410	10.41	19.788	3.46	0.280	7.11	5.541	24.65	0.214	5.44	0.045	1.14	4.8	316 SS	CG	P
0.500	12.70	69234S	0.750	19.05	0.314	7.98	396.269	69.35	0.101	2.57	40.023	178.02	0.512	13.01	0.093	2.36	5.5	316 SS	CG	P
0.500	12.70	69235S	0.780	19.81	0.418	10.62														



316 Stainless Steel Compression Springs


O.D. Inches mm	Century Stock Number	Free Length		I.D. Inches mm		Rate Lbs./In. N/mm		Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Solid Length Inches mm		Wire Dia. Inches mm		Total Coils	E Mat'l	F Ends	S h	
0.500	12.70	69261S	1.000	25.40	0.416	10.57	11.568	2.02	0.390	9.91	4.512	20.07	0.231	5.87	0.042	1.07	5.5	316 SS CG P
0.500	12.70	69262S	1.000	25.40	0.410	10.41	13.604	2.38	0.407	10.34	5.537	24.63	0.270	6.86	0.045	1.14	6	316 SS CG P
0.500	12.70	69263S	1.000	25.40	0.400	10.16	19.052	3.33	0.388	9.86	7.392	32.88	0.375	9.53	0.050	1.27	6.5	316 SS C P
0.500	12.70	69264S	1.000	25.40	0.424	10.77	6.608	1.16	0.520	13.21	3.436	15.28	0.266	6.76	0.038	0.97	6	316 SS C P
0.500	12.70	69265S	1.000	25.40	0.418	10.62	5.619	0.98	0.610	15.49	3.428	15.25	0.390	9.91	0.041	1.04	8.5	316 SS C P
0.500	12.70	69267S	1.060	26.92	0.436	11.07	2.557	0.45	0.806	20.47	2.061	9.17	0.224	5.69	0.032	0.81	7	316 SS CG P
0.500	12.70	69268S	1.060	26.92	0.398	10.11	11.678	2.04	0.550	13.97	6.423	28.57	0.510	12.95	0.051	1.30	10	316 SS CG P
0.500	12.70	69269S	1.060	26.92	0.380	9.65	23.772	4.16	0.460	11.68	10.935	48.64	0.600	15.24	0.060	1.52	10	316 SS CG P
0.500	12.70	69270S	1.090	27.69	0.422	10.72	7.379	1.29	0.502	12.75	3.704	16.48	0.234	5.94	0.039	0.99	6	316 SS CG P
0.500	12.70	69271S	1.130	28.70	0.400	10.16	14.289	2.50	0.517	13.13	7.387	32.86	0.450	11.43	0.050	1.27	8	316 SS C P
0.500	12.70	69273S	1.130	28.70	0.340	8.64	138.214	24.19	0.197	5.00	27.228	121.11	0.640	16.26	0.080	2.03	7	316 SS C P
0.500	12.70	69274S	1.140	28.96	0.410	10.41	9.069	1.59	0.611	15.52	5.541	24.65	0.360	9.14	0.045	1.14	8	316 SS CG P
0.500	12.70	69275S	1.190	30.23	0.410	10.41	10.883	1.91	0.509	12.93	5.539	24.64	0.315	8.00	0.045	1.14	7	316 SS CG P
0.500	12.70	69277S	1.230	31.24	0.420	10.67	7.735	1.35	0.516	13.11	3.991	17.75	0.250	6.35	0.040	1.02	6.3	316 SS CG P
0.500	12.70	69278S	1.250	31.75	0.350	8.89	85.869	15.03	0.263	6.68	22.584	100.45	0.675	17.15	0.075	1.91	8	316 SS C P
0.500	12.70	69279S	1.250	31.75	0.410	10.41	10.883	1.91	0.509	12.93	5.539	24.64	0.360	9.14	0.045	1.14	7	316 SS CG P
0.500	12.70	69280S	1.250	31.75	0.340	8.64	81.302	14.23	0.335	8.51	27.236	121.15	0.840	21.34	0.080	2.03	10.5	316 SS CG P
0.500	12.70	69281S	1.310	33.27	0.422	10.72	4.919	0.86	0.753	19.13	3.704	16.48	0.351	8.92	0.039	0.99	8	316 SS C P
0.500	12.70	69282S	1.310	33.27	0.400	10.16	8.573	1.50	0.660	16.76	5.658	25.17	0.650	16.51	0.050	1.27	12	316 SS C P
0.500	12.70	69283S	1.310	33.27	0.370	9.40	27.108	4.74	0.530	13.46	14.367	63.90	0.780	19.81	0.065	1.65	12	316 SS CG P
0.500	12.70	69284S	1.380	35.05	0.398	10.11	9.342	1.64	0.768	19.51	7.175	31.91	0.612	15.55	0.051	1.30	12	316 SS CG P
0.500	12.70	69285S	1.380	35.05	0.398	10.11	11.678	2.04	0.671	17.04	7.836	34.86	0.510	12.95	0.051	1.30	10	316 SS CG P
0.500	12.70	69286S	1.380	35.05	0.400	10.16	10.717	1.88	0.690	17.53	7.395	32.89	0.500	12.70	0.050	1.27	10	316 SS CG P
0.500	12.70	69287S	1.380	35.05	0.400	10.16	8.573	1.50	0.730	18.54	6.258	27.84	0.650	16.51	0.050	1.27	12	316 SS C P
0.500	12.70	69288S	1.410	35.81	0.405	10.29	12.487	2.19	0.509	12.93	6.356	28.27	0.356	9.04	0.048	1.21	7.5	316 SS CG P
0.500	12.70	69289S	1.500	38.10	0.390	9.91	17.307	3.03	0.553	14.05	9.571	42.57	0.523	13.28	0.055	1.40	9.5	316 SS CG P
0.500	12.70	69290S	1.500	38.10	0.418	10.62	6.352	1.11	0.677	17.20	4.300	19.13	0.318	8.08	0.041	1.04	7.8	316 SS CG P
0.500	12.70	69291S	1.500	38.10	0.424	10.77	4.806	0.84	0.714	18.14	3.431	15.26	0.323	8.20	0.038	0.97	7.5	316 SS C P
0.500	12.70	69292S	1.500	38.10	0.424	10.77	5.286	0.93	0.649	16.49	3.431	15.26	0.266	6.76	0.038	0.97	7	316 SS CG P
0.500	12.70	69293S	1.500	38.10	0.375	9.53	28.471	4.98	0.478	12.14	13.609	60.53	0.625	15.88	0.063	1.59	10	316 SS CG P
0.500	12.70	69294S	1.500	38.10	0.328	8.33	109.502	19.16	0.298	7.57	32.632	145.15	0.929	23.60	0.086	2.18	10.8	316 SS CG P
0.500	12.70	69295S	1.500	38.10	0.420	10.67	6.575	1.15	0.608	15.44	3.998	17.78	0.320	8.13	0.040	1.02	7	316 SS C P
0.500	12.70	69296S	1.500	38.10	0.375	9.53	24.491	4.29	0.555	14.10	13.593	60.46	0.706	17.93	0.063	1.59	11.3	316 SS CG P
0.500	12.70	69298S	1.500	38.10	0.328	8.33	148.248	25.94	0.220	5.59	32.615	145.07	0.731	18.57	0.086	2.18	8.5	316 SS CG P
0.500	12.70	69299S	1.500	38.10	0.356	9.04	47.606	8.33	0.431	10.95	20.518	91.26	0.792	20.12	0.072	1.83	11	316 SS CG P
0.500	12.70	69300S	1.560	39.62	0.390	9.91	16.225	2.84	0.590	14.99	9.573	42.58	0.550	13.97	0.055	1.40	10	316 SS CG P
0.500	12.70	69301S	1.560	39.62	0.380	9.65	21.131	3.70	0.584	14.83	12.341	54.89	0.660	16.76	0.060	1.52	11	316 SS CG P
0.500	12.70	69302S	1.560	39.62	0.318	8.08	150.948	26.42	0.255	6.48	38.492	171.21	0.937	23.80	0.091	2.31	10.3	316 SS CG P
0.500	12.70	69303S	1.630	41.40	0.384	9.75	15.904	2.78	0.703	17.86	11.181	49.73	0.713	18.11	0.058	1.47	12.3	316 SS CG P
0.500	12.70	69304S	1.630	41.40	0.366	9.30	34.475	6.03	0.484	12.29	16.686	74.22	0.804	20.42	0.067	1.70	11	316 SS C P
0.500	12.70	69305S	1.630	41.40	0.392	9.96	17.115	3.00	0.542	13.77	9.276	41.26	0.540	13.72	0.054	1.37	9	316 SS C P
0.500	12.70	69306S	1.630	41.40	0.428	10.87	1.401	0.25	1.018	25.86	1.426	6.34	0.612	15.55	0.036	0.91	17	316 SS CG P
0.500	12.70	69307S	1.630	41.40	0.416	10.57	5.398	0.95	0.837	21.26	4.518	20.10	0.441	11.20	0.042	1.07	9.5	316 SS C P
0.500	12.70	69308S	1.660	42.16	0.328	8.33	91.773	16.06	0.356	9.04	32.671	145.32	1.075	27.31	0.086	2.18	12.5	316 SS CG P
0.500	12.70	69309S	1.690	42.93	0.410	10.41	5.442	0.95	1.018	25.86	5.540	24.64	0.540	13.72	0.045	1.14	12	316 SS CG P
0.500	12.70	69310S	1.720	43.69	0.392	9.96	11.981	2.10	0.774	19.66	9.273	41.25	0.648	16.46	0.054	1.37	12	316 SS CG P
0.500	12.70	69311S	1.750	44.45	0.356	9.04	38.951	6.82	0.527	13.39	20.527	91.30	0.936	23.77	0.072	1.83	13	316 SS CG P
0.500	12.70	69312S	1.750	44.45	0.366	9.30	31.661	5.54	0.526	13.36	16.654	74.08	0.858	21.79	0.067	1.70	11.8	316 SS C P
0.500	12.70	69313S	1.810	45.97	0.384	9.75	11.069	1.94	0.836	21.23	9.254	41.16	0.974	24.74	0.058	1.47	16.8	316 SS CG P
0.500	12.70	69314S	1.810	45.97	0.356	9.04	30.604	5.36	0.658	16.71	20.137	89.57	1.152	29.26	0.072	1.83	16	316 SS CG P
0.500	12.70	69315S	1.840	46.74	0.320	8.13	132.217	23.14	0.282	7.16	37.285	165.84	0.990	25.15	0.090	2.29	11	316 SS CG P
0.500	12.70	69316S	1.880	47.75	0.380	9.65	12.678	2.22	0.800	20.32	10.142	45.11	1.080	27.43	0.060	1.52	17	316 SS C P
0.500	12.70	69317S	1.880	47.75	0.392	9.96	7.987	1.40	0.908	23.06	7.252	32.26	0.972	24.69	0.054	1.37	17	316 SS C P
0.500	12.70	69318S	1.910	48.51	0.392	9.96	11.981	2.10	0.774	19.66	9.273	41.25	0.648	16.46	0.054	1.37	12	316 SS CG P
0.500	12.70	69319S	1.910	48.51	0.375	9.53	26.796	4.69	0.507	12.88	13.586	60.43	0.719	18.26	0.063	1.59	10.5	316



Metric 316 Stainless Steel Compression Springs


Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends Mat'l	E n d s	F in sh
1.20 0.047	50000S	2.00 0.079	0.80 0.031	4.20 23.980	0.34 0.013	1.42 0.318	1.30 0.051	0.20 0.008	5.5	316 SS	C	P
1.20 0.047	50001S	2.70 0.106	0.80 0.031	2.70 15.420	0.53 0.021	1.42 0.319	1.70 0.067	0.20 0.008	7.5	316 SS	C	P
1.20 0.047	50002S	3.90 0.154	0.80 0.031	1.70 9.710	0.83 0.033	1.42 0.319	2.30 0.091	0.20 0.008	10.5	316 SS	C	P
1.20 0.047	50003S	5.50 0.217	0.80 0.031	1.20 6.850	1.18 0.046	1.42 0.319	3.10 0.122	0.20 0.008	14.5	316 SS	C	P
1.20 0.047	50004S	7.80 0.307	0.80 0.031	0.79 4.510	1.79 0.071	1.42 0.319	4.30 0.169	0.20 0.008	20.5	316 SS	C	P
1.40 0.055	65000S	3.50 0.138	1.00 0.039	1.35 7.684	0.91 0.036	1.23 0.277	1.91 0.075	0.20 0.008	8.4	316 SS	C	P
1.40 0.055	65001S	5.00 0.197	1.00 0.039	0.89 5.059	1.40 0.055	1.24 0.278	2.59 0.102	0.20 0.008	11.8	316 SS	C	P
1.40 0.055	65002S	7.50 0.295	1.00 0.039	0.57 3.224	2.18 0.086	1.23 0.277	3.71 0.146	0.20 0.008	17.3	316 SS	C	P
1.40 0.055	65003S	10.00 0.394	1.00 0.039	0.41 2.365	3.00 0.118	1.24 0.279	4.85 0.191	0.20 0.008	22.9	316 SS	C	P
1.40 0.055	65004S	12.50 0.492	1.00 0.039	0.33 1.868	3.79 0.149	1.24 0.278	5.97 0.235	0.20 0.008	28.4	316 SS	C	P
1.40 0.055	65005S	15.00 0.591	1.00 0.039	0.27 1.544	4.57 0.180	1.24 0.278	7.09 0.279	0.20 0.008	34.0	316 SS	C	P
1.40 0.055	65006S	17.50 0.689	1.00 0.039	0.23 1.314	5.39 0.212	1.24 0.279	8.23 0.324	0.20 0.008	39.5	316 SS	C	P
1.40 0.055	65024S	2.30 0.091	1.00 0.039	2.28 13.020	0.53 0.021	1.21 0.273	1.30 0.051	0.20 0.008	5.5	316 SS	C	P
1.40 0.055	65025S	3.20 0.126	1.00 0.039	1.51 8.624	0.81 0.032	1.23 0.276	1.70 0.067	0.20 0.008	7.5	316 SS	C	P
1.40 0.055	65026S	4.60 0.181	1.00 0.039	0.97 5.544	1.27 0.050	1.23 0.277	2.31 0.091	0.20 0.008	10.5	316 SS	C	P
1.40 0.055	65027S	6.50 0.256	1.00 0.039	0.67 3.808	1.85 0.073	1.24 0.278	3.10 0.122	0.20 0.008	14.5	316 SS	C	P
1.40 0.055	65028S	9.30 0.366	1.00 0.039	0.45 2.576	2.74 0.108	1.24 0.278	4.29 0.169	0.20 0.008	20.5	316 SS	C	P
1.40 0.055	65034S	3.50 0.138	0.90 0.035	3.80 21.689	0.61 0.024	2.32 0.521	2.36 0.093	0.25 0.010	8.3	316 SS	C	P
1.40 0.055	65035S	5.00 0.197	0.90 0.035	2.45 14.012	0.94 0.037	2.30 0.518	3.25 0.128	0.25 0.010	11.8	316 SS	C	P
1.40 0.055	65036S	7.50 0.295	0.90 0.035	1.54 8.813	1.50 0.059	2.31 0.520	4.72 0.186	0.25 0.010	17.6	316 SS	C	P
1.40 0.055	65037S	10.00 0.394	0.90 0.035	1.13 6.428	2.06 0.081	2.32 0.521	6.17 0.243	0.25 0.010	23.3	316 SS	C	P
1.40 0.055	65038S	12.50 0.492	0.90 0.035	0.89 5.059	2.59 0.102	2.29 0.516	7.65 0.301	0.25 0.010	29.1	316 SS	C	P
1.40 0.055	65039S	15.00 0.591	0.90 0.035	0.73 4.171	3.15 0.124	2.30 0.517	9.12 0.359	0.25 0.010	34.9	316 SS	C	P
1.40 0.055	65040S	17.50 0.689	0.90 0.035	0.62 3.548	3.71 0.146	2.30 0.518	10.57 0.416	0.25 0.010	40.7	316 SS	C	P
1.40 0.055	65105S	3.50 0.138	0.80 0.031	9.70 55.365	0.41 0.016	3.94 0.886	2.72 0.107	0.30 0.012	7.9	316 SS	C	P
1.40 0.055	65106S	5.00 0.197	0.80 0.031	6.14 35.038	0.64 0.025	3.89 0.876	3.76 0.148	0.30 0.012	11.3	316 SS	C	P
1.40 0.055	65107S	7.50 0.295	0.80 0.031	3.81 21.736	1.02 0.040	3.86 0.869	5.49 0.216	0.30 0.012	17.0	316 SS	C	P
1.40 0.055	65108S	10.00 0.394	0.80 0.031	2.76 15.755	1.40 0.055	3.85 0.867	7.21 0.284	0.30 0.012	22.7	316 SS	C	P
1.40 0.055	65109S	12.50 0.492	0.80 0.031	2.16 12.356	1.78 0.070	3.84 0.865	8.94 0.352	0.30 0.012	28.4	316 SS	C	P
1.40 0.055	65110S	15.00 0.591	0.80 0.031	1.78 10.163	2.16 0.085	3.84 0.864	10.69 0.421	0.30 0.012	34.1	316 SS	C	P
1.40 0.055	65111S	17.50 0.689	0.80 0.031	1.51 8.631	2.54 0.100	3.84 0.863	12.42 0.489	0.30 0.012	39.8	316 SS	C	P
1.45 0.057	65095S	2.40 0.094	0.95 0.037	5.57 31.785	0.41 0.016	2.26 0.509	1.63 0.064	0.25 0.010	5.5	316 SS	C	P
1.45 0.057	65096S	3.30 0.130	0.95 0.037	3.54 20.227	0.64 0.025	2.25 0.506	2.13 0.084	0.25 0.010	7.5	316 SS	C	P
1.45 0.057	65097S	4.70 0.185	0.95 0.037	2.29 13.088	0.97 0.038	2.21 0.497	2.87 0.113	0.25 0.010	10.5	316 SS	C	P
1.45 0.057	65098S	6.60 0.260	0.95 0.037	1.56 8.900	1.42 0.056	2.21 0.498	3.89 0.153	0.25 0.010	14.5	316 SS	C	P
1.45 0.057	65099S	9.40 0.370	0.95 0.037	1.05 6.013	2.11 0.083	2.22 0.499	5.39 0.212	0.25 0.010	20.5	316 SS	C	P
1.52 0.060	50005S	5.00 0.197	1.12 0.044	0.63 3.600	1.82 0.072	1.15 0.258	2.62 0.103	0.20 0.008	12.1	316 SS	C	P
1.52 0.060	50006S	10.00 0.394	1.12 0.044	0.30 1.710	3.82 0.151	1.15 0.258	4.84 0.191	0.20 0.008	23.2	316 SS	C	P
1.52 0.060	50007S	15.00 0.591	1.12 0.044	0.20 1.140	5.74 0.226	1.15 0.258	7.06 0.278	0.20 0.008	34.3	316 SS	C	P
1.52 0.060	50008S	20.00 0.787	1.12 0.044	0.14 0.800	8.19 0.323	1.15 0.258	9.30 0.366	0.20 0.008	45.5	316 SS	C	P
1.80 0.071	65029S	3.00 0.118	1.40 0.055	0.96 5.492	1.02 0.040	0.98 0.220	1.30 0.051	0.20 0.008	5.5	316 SS	C	P
1.80 0.071	65030S	4.40 0.173	1.40 0.055	0.61 3.495	1.60 0.063	0.98 0.220	1.70 0.067	0.20 0.008	7.5	316 SS	C	P
1.80 0.071	65031S	6.40 0.252	1.40 0.055	0.40 2.262	2.46 0.097	0.97 0.219	2.31 0.091	0.20 0.008	10.5	316 SS	C	P
1.80 0.071	65032S	9.20 0.362	1.40 0.055	0.27 1.538	3.63 0.143	0.98 0.220	3.10 0.122	0.20 0.008	14.5	316 SS	C	P
1.80 0.071	65033S	13.30 0.524	1.40 0.055	0.18 1.039	5.39 0.212	0.98 0.220	4.29 0.169	0.20 0.008	20.5	316 SS	C	P
1.85 0.073	65100S	3.00 0.118	1.35 0.053	2.35 13.409	0.76 0.030	1.79 0.402	1.63 0.064	0.25 0.010	5.5	316 SS	C	P
1.85 0.073	65101S	4.30 0.169	1.35 0.053	1.49 8.533	1.19 0.047	1.78 0.401	2.13 0.084	0.25 0.010	7.5	316 SS	C	P
1.85 0.073	65102S	6.20 0.244	1.35 0.053	0.97 5.522	1.85 0.073	1.79 0.403	2.87 0.113	0.25 0.010	10.5	316 SS	C	P
1.85 0.073	65103S	8.70 0.343	1.35 0.053	0.66 3.755	2.72 0.107	1.79 0.402	3.89 0.153	0.25 0.010	14.5	316 SS	C	P
1.85 0.073	65104S	12.50 0.492	1.35 0.053	0.44 2.537	4.04 0.159	1.79 0.403	5.39 0.212	0.25 0.010	20.5	316 SS	C	P
1.92 0.076	65159S	3.10 0.122	1.28 0.050	6.30 35.996	0.56 0.022	3.52 0.792	2.08 0.082	0.32 0.013	5.5	316 SS	C	P
1.92 0.076	65160S	4.40 0.173	1.28 0.050	4.01 22.906	0.89 0.035	3.56 0.802	2.72 0.107	0.32 0.013	7.5	316 SS	C	P
1.92 0.076	65161S	6.30 0.248	1.28 0.050	2.60 14.822	1.35 0.053	3.49 0.786	3.68 0.145	0.32 0.013	10.5	316 SS	C	P
1.92 0.076	65162S	8.70 0.343	1.28 0.050	1.77 10.079	2.01 0.079	3.54 0.796	4.95 0.195	0.32 0.013	14.5	316 SS	C	P
1.92 0.076	65163S	12.50 0.492	1.28 0.050	1.19 6.810	2.95 0.116	3.51 0.790	6.88 0.271	0.32 0.013	20.5	316 SS	C	P
2.00 0.079	65007S	3.50 0.138	1.60 0.063	0.67 3.800	1.32 0.052	0.88 0.198	1.37 0.054	0.20 0.008	5.8	316 SS	C	P
2.00 0.079	65008S	5.00 0.197	1.60 0.063	0.44 2.502	2.03 0.080	0.89 0.200	1.78 0.070	0.20 0.008	7.7	316 SS	C	P
2.00 0.079	65009S	7.50 0.295	1.60 0.063	0.28 1.593	3.18 0.125	0.88 0.199	2.44 0.096	0.20 0.008	11.0	316 SS	C	P
2.00 0.079	65010S	10.00 0.394	1.60 0.063	0.21 1.169	4.32 0.170	0.88 0.199	3.10 0.122	0.20 0.008	14.2	316 SS	C	P
2.00 0.079	65011S	12.50 0.492	1.60 0.063	0.16 0.923	5.49 0.216	0.88 0.199	3.76 0.148	0.20 0.008	17.5	316 SS	C	P
2.00 0.079	65012S	15.00 0.591	1.60 0.063	0.13 0.762	6.63 0.261	0.88 0.199	4.42 0.174	0.20 0.008	20.8	316 SS	C	P
2.00 0.079	65013S	17.50 0.689	1.60 0.063	0.11 0.650	7.77 0.306	0.88 0.199	5.08 0.200	0.20 0.008	24.0	316 SS	C	P
2.00 0.079	65041S	3.50 0.138	1.50 0.059	1.64 9.377	1.02 0.040	1.67 0.375	1.80 0.071	0.25 0.010	6.1	316 SS	C	P
2.00 0.079	65042S	5.00 0.197	1.50 0.059	1.06 6.058	1.58 0.062	1.67 0.376	2.36 0.093	0.25 0.010	8.3	316 SS	C	P
2.00 0.079	65043S	7.50 0.295	1.50 0.059	0.67 3.810								




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Def. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends Mat'l	Ends F sh									
2.00	0.079	65112S	3.50	0.138	1.40	0.055	3.68	21.032	0.76	0.030	2.80	0.631	2.16	0.085	0.30	0.012	6.1	316 SS	C	P
2.00	0.079	65113S	5.00	0.197	1.40	0.055	2.33	13.311	1.22	0.048	2.84	0.639	2.90	0.114	0.30	0.012	8.5	316 SS	C	P
2.00	0.079	65114S	7.50	0.295	1.40	0.055	1.45	8.258	1.96	0.077	2.83	0.636	4.09	0.161	0.30	0.012	12.4	316 SS	C	P
2.00	0.079	65115S	10.00	0.394	1.40	0.055	1.05	5.985	2.69	0.106	2.82	0.634	5.31	0.209	0.30	0.012	16.4	316 SS	C	P
2.00	0.079	65116S	12.50	0.492	1.40	0.055	0.82	4.694	3.45	0.136	2.84	0.638	6.50	0.256	0.30	0.012	20.4	316 SS	C	P
2.00	0.079	65117S	15.00	0.591	1.40	0.055	0.68	3.860	4.19	0.165	2.83	0.637	7.72	0.304	0.30	0.012	24.3	316 SS	C	P
2.00	0.079	65118S	17.50	0.689	1.40	0.055	0.57	3.279	4.93	0.194	2.83	0.636	8.92	0.351	0.30	0.012	28.3	316 SS	C	P
2.00	0.079	65119S	20.00	0.787	1.40	0.055	0.50	2.849	5.69	0.224	2.84	0.638	10.14	0.399	0.30	0.012	32.3	316 SS	C	P
2.02	0.080	50009S	5.00	0.197	1.62	0.064	0.38	2.170	2.32	0.091	0.88	0.198	1.88	0.074	0.20	0.008	8.4	316 SS	C	P
2.02	0.080	50010S	10.00	0.394	1.62	0.064	0.17	0.970	5.18	0.204	0.88	0.198	3.30	0.130	0.20	0.008	15.5	316 SS	C	P
2.02	0.080	50011S	15.00	0.591	1.62	0.064	0.11	0.630	8.00	0.315	0.88	0.198	4.72	0.186	0.20	0.008	22.6	316 SS	C	P
2.02	0.080	50012S	20.00	0.787	1.62	0.064	0.08	0.460	11.00	0.433	0.88	0.198	6.16	0.243	0.20	0.008	29.8	316 SS	C	P
2.02	0.080	50013S	25.00	0.984	1.62	0.064	0.07	0.400	12.57	0.495	0.88	0.198	7.60	0.299	0.20	0.008	37.0	316 SS	C	P
2.12	0.083	50014S	20.00	0.787	1.62	0.064	0.18	1.030	8.99	0.354	1.62	0.364	8.23	0.324	0.25	0.010	31.9	316 SS	C	P
2.12	0.083	50015S	25.00	0.984	1.62	0.064	0.15	0.860	10.79	0.425	1.62	0.364	10.13	0.399	0.25	0.010	39.5	316 SS	C	P
2.12	0.083	50016S	30.00	1.181	1.62	0.064	0.12	0.690	13.49	0.531	1.62	0.364	12.00	0.472	0.25	0.010	47.0	316 SS	C	P
2.20	0.087	50017S	4.10	0.161	1.80	0.071	0.58	3.310	1.40	0.055	0.81	0.182	1.20	0.047	0.20	0.008	5.0	316 SS	C	P
2.20	0.087	65014S	4.00	0.157	1.80	0.071	0.49	2.812	1.65	0.065	0.81	0.183	1.30	0.051	0.20	0.008	5.5	316 SS	C	P
2.20	0.087	65015S	5.90	0.232	1.80	0.071	0.31	1.790	2.59	0.102	0.81	0.183	1.70	0.067	0.20	0.008	7.5	316 SS	C	P
2.20	0.087	65016S	8.70	0.343	1.80	0.071	0.20	1.158	3.99	0.157	0.81	0.182	2.31	0.091	0.20	0.008	10.5	316 SS	C	P
2.20	0.087	65017S	12.60	0.496	1.80	0.071	0.14	0.787	5.87	0.231	0.81	0.182	3.10	0.122	0.20	0.008	14.5	316 SS	C	P
2.20	0.087	65018S	18.30	0.720	1.80	0.071	0.09	0.532	8.69	0.342	0.81	0.182	4.29	0.169	0.20	0.008	20.5	316 SS	C	P
2.25	0.089	65049S	3.50	0.138	1.75	0.069	1.45	8.300	1.02	0.040	1.48	0.332	1.60	0.063	0.25	0.010	5.1	316 SS	C	P
2.25	0.089	65050S	5.00	0.197	1.75	0.069	0.95	5.400	1.58	0.062	1.49	0.335	2.01	0.079	0.25	0.010	6.7	316 SS	C	P
2.25	0.089	65051S	6.50	0.256	1.75	0.069	0.70	4.000	2.13	0.084	1.49	0.336	2.39	0.094	0.25	0.010	8.3	316 SS	C	P
2.25	0.089	65052S	8.00	0.315	1.75	0.069	0.54	3.100	2.74	0.108	1.49	0.335	2.79	0.110	0.25	0.010	10.2	316 SS	C	P
2.25	0.089	65053S	9.50	0.374	1.75	0.069	0.46	2.600	3.28	0.129	1.49	0.335	3.20	0.126	0.25	0.010	11.8	316 SS	C	P
2.25	0.089	65054S	11.00	0.433	1.75	0.069	0.39	2.200	3.89	0.153	1.50	0.337	3.61	0.142	0.25	0.010	13.5	316 SS	C	P
2.25	0.089	65055S	12.50	0.492	1.75	0.069	0.33	1.900	4.50	0.177	1.49	0.336	3.99	0.157	0.25	0.010	15.3	316 SS	C	P
2.25	0.089	65056S	14.00	0.551	1.75	0.069	0.30	1.700	5.03	0.198	1.50	0.337	4.45	0.175	0.25	0.010	16.9	316 SS	C	P
2.25	0.089	65057S	15.50	0.610	1.75	0.069	0.28	1.583	5.39	0.212	1.49	0.336	4.85	0.191	0.25	0.010	18.0	316 SS	C	P
2.25	0.089	65058S	17.00	0.669	1.75	0.069	0.25	1.400	6.10	0.240	1.49	0.336	5.26	0.207	0.25	0.010	20.1	316 SS	C	P
2.25	0.089	65059S	19.00	0.748	1.75	0.069	0.21	1.200	7.11	0.280	1.49	0.336	5.84	0.230	0.25	0.010	23.1	316 SS	C	P
2.25	0.089	65060S	3.70	0.146	1.75	0.069	1.20	6.866	1.25	0.049	1.49	0.336	1.63	0.064	0.25	0.010	5.5	316 SS	C	P
2.25	0.089	65061S	5.50	0.217	1.75	0.069	0.77	4.369	1.96	0.077	1.49	0.336	2.13	0.084	0.25	0.010	7.5	316 SS	C	P
2.25	0.089	65062S	8.00	0.315	1.75	0.069	0.50	2.827	3.02	0.119	1.49	0.336	2.87	0.113	0.25	0.010	10.5	316 SS	C	P
2.25	0.089	65063S	11.40	0.449	1.75	0.069	0.34	1.922	4.45	0.175	1.49	0.336	3.89	0.153	0.25	0.010	14.5	316 SS	C	P
2.25	0.089	65064S	16.60	0.654	1.75	0.069	0.23	1.299	6.58	0.259	1.49	0.336	5.39	0.212	0.25	0.010	20.5	316 SS	C	P
2.32	0.091	65139S	3.70	0.146	1.68	0.065	3.23	18.430	0.94	0.037	3.03	0.682	2.08	0.082	0.32	0.013	5.5	316 SS	C	P
2.32	0.091	65140S	5.30	0.209	1.68	0.065	2.05	11.728	1.47	0.058	3.02	0.680	2.72	0.107	0.32	0.013	7.5	316 SS	C	P
2.32	0.091	65141S	7.70	0.303	1.68	0.065	1.33	7.589	2.26	0.089	3.00	0.675	3.68	0.145	0.32	0.013	10.5	316 SS	C	P
2.32	0.091	65142S	10.90	0.429	1.68	0.065	0.90	5.160	3.33	0.131	3.00	0.676	4.95	0.195	0.32	0.013	14.5	316 SS	C	P
2.32	0.091	65143S	15.60	0.614	1.68	0.065	0.61	3.487	4.93	0.194	3.00	0.676	6.88	0.271	0.32	0.013	20.5	316 SS	C	P
2.40	0.094	50018S	3.90	0.154	1.60	0.063	9.20	52.530	0.59	0.023	5.44	1.222	2.40	0.094	0.40	0.016	5.0	316 SS	C	P
2.40	0.094	50019S	16.00	0.630	1.60	0.063	1.60	9.140	3.40	0.134	5.44	1.223	8.60	0.339	0.40	0.016	20.5	316 SS	C	P
2.40	0.094	65164S	3.50	0.138	1.60	0.062	7.88	44.994	0.69	0.027	5.40	1.215	2.59	0.102	0.40	0.016	5.5	316 SS	C	P
2.40	0.094	65165S	5.00	0.197	1.60	0.062	5.02	28.633	1.09	0.043	5.47	1.231	3.40	0.134	0.40	0.016	7.5	316 SS	C	P
2.40	0.094	65166S	7.00	0.276	1.60	0.062	3.25	18.527	1.68	0.066	5.44	1.223	4.60	0.181	0.40	0.016	10.5	316 SS	C	P
2.40	0.094	65167S	10.00	0.394	1.60	0.062	2.21	12.598	2.46	0.097	5.43	1.222	6.20	0.244	0.40	0.016	14.5	316 SS	C	P
2.40	0.094	65168S	14.00	0.551	1.60	0.062	1.49	8.512	3.66	0.144	5.45	1.226	8.61	0.339	0.40	0.016	20.5	316 SS	C	P
2.50	0.098	65065S	3.50	0.138	2.00	0.078	1.10	6.287	1.25	0.049	1.37	0.308	1.50	0.059	0.25	0.010	4.9	316 SS	C	P
2.50	0.098	65066S	5.00	0.197	2.00	0.078	0.71	4.062	1.93	0.076	1.37	0.309	1.91	0.075	0.25	0.010	6.5	316 SS	C	P
2.50	0.098	65067S	7.50	0.295	2.00	0.078	0.45	2.555	3.05	0.120	1.36	0.307	2.59	0.102	0.25	0.010	9.2	316 SS	C	P
2.50	0.098	65068S	10.00	0.394	2.00	0.078	0.33	1.863	4.19	0.165	1.36	0.307	3.25	0.128	0.25	0.010	11.8	316 SS	C	P
2.50	0.098	65069S	12.50	0.492	2.00															




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils Mat'l	Ends C	Finish P									
2.75	0.108	65075S	4.90	0.193	2.25	0.088	0.62	3.515	2.03	0.080	1.25	0.281	1.63	0.064	0.25	0.010	5.5	316 SS	C	P
2.75	0.108	65076S	7.30	0.287	2.25	0.088	0.39	2.237	3.18	0.125	1.24	0.280	2.13	0.084	0.25	0.010	7.5	316 SS	C	P
2.75	0.108	65077S	10.90	0.429	2.25	0.088	0.25	1.447	4.93	0.194	1.25	0.281	2.87	0.113	0.25	0.010	10.5	316 SS	C	P
2.75	0.108	65078S	15.70	0.618	2.25	0.088	0.17	0.984	7.24	0.285	1.24	0.280	3.89	0.153	0.25	0.010	14.5	316 SS	C	P
2.75	0.108	65079S	22.90	0.902	2.25	0.088	0.12	0.665	10.69	0.421	1.24	0.280	5.39	0.212	0.25	0.010	20.5	316 SS	C	P
2.82	0.111	50024S	4.80	0.189	2.18	0.086	1.93	11.020	1.30	0.051	2.51	0.564	1.92	0.076	0.32	0.013	5.0	316 SS	C	P
2.82	0.111	65144S	4.70	0.185	2.18	0.085	1.65	9.436	1.52	0.060	2.52	0.566	2.08	0.082	0.32	0.013	5.5	316 SS	C	P
2.82	0.111	65145S	6.80	0.268	2.18	0.085	1.05	6.005	2.39	0.094	2.51	0.564	2.72	0.107	0.32	0.013	7.5	316 SS	C	P
2.82	0.111	65146S	10.00	0.394	2.18	0.085	0.68	3.885	3.68	0.145	2.50	0.563	3.68	0.145	0.32	0.013	10.5	316 SS	C	P
2.82	0.111	65147S	14.20	0.559	2.18	0.085	0.46	2.642	5.41	0.213	2.50	0.563	4.95	0.195	0.32	0.013	14.5	316 SS	C	P
2.82	0.111	65148S	20.60	0.811	2.18	0.085	0.31	1.785	8.00	0.315	2.50	0.562	6.88	0.271	0.32	0.013	20.5	316 SS	C	P
2.90	0.114	50025S	4.60	0.181	2.10	0.083	4.71	26.890	0.98	0.038	4.59	1.032	2.40	0.094	0.40	0.016	5.0	316 SS	C	P
2.90	0.114	65169S	4.30	0.169	2.10	0.082	4.04	23.037	1.14	0.045	4.61	1.037	2.59	0.102	0.40	0.016	5.5	316 SS	C	P
2.90	0.114	65170S	6.30	0.248	2.10	0.082	2.57	14.660	1.78	0.070	4.56	1.026	3.40	0.134	0.40	0.016	7.5	316 SS	C	P
2.90	0.114	65171S	9.10	0.358	2.10	0.082	1.66	9.486	2.77	0.109	4.60	1.034	4.60	0.181	0.40	0.016	10.5	316 SS	C	P
2.90	0.114	65172S	13.00	0.512	2.10	0.082	1.13	6.450	4.06	0.160	4.59	1.032	6.20	0.244	0.40	0.016	14.5	316 SS	C	P
2.90	0.114	65173S	18.50	0.728	2.10	0.082	0.76	4.358	6.02	0.237	4.59	1.033	8.61	0.339	0.40	0.016	20.5	316 SS	C	P
3.00	0.118	50026S	22.00	0.866	2.00	0.079	1.92	10.960	4.43	0.174	8.50	1.910	10.00	0.394	0.50	0.020	20.0	316 SS	CG	P
3.00	0.118	65080S	7.50	0.295	2.50	0.098	0.33	1.892	3.45	0.136	1.14	0.257	2.08	0.082	0.25	0.010	7.3	316 SS	C	P
3.00	0.118	65081S	10.00	0.394	2.50	0.098	0.24	1.380	4.72	0.186	1.14	0.257	2.59	0.102	0.25	0.010	9.2	316 SS	C	P
3.00	0.118	65082S	12.50	0.492	2.50	0.098	0.19	1.086	6.02	0.237	1.14	0.257	3.07	0.121	0.25	0.010	11.1	316 SS	C	P
3.00	0.118	65083S	15.00	0.591	2.50	0.098	0.16	0.895	7.29	0.287	1.14	0.257	3.58	0.141	0.25	0.010	13.1	316 SS	C	P
3.00	0.118	65084S	17.50	0.689	2.50	0.098	0.13	0.761	8.59	0.338	1.14	0.257	4.06	0.160	0.25	0.010	15.0	316 SS	C	P
3.00	0.118	65085S	20.00	0.787	2.50	0.098	0.12	0.662	9.86	0.388	1.14	0.257	4.57	0.180	0.25	0.010	17.0	316 SS	C	P
3.00	0.118	65086S	22.50	0.886	2.50	0.098	0.10	0.586	11.15	0.439	1.14	0.257	5.06	0.199	0.25	0.010	18.9	316 SS	C	P
3.00	0.118	65087S	25.00	0.984	2.50	0.098	0.09	0.526	12.42	0.489	1.14	0.257	5.56	0.219	0.25	0.010	20.9	316 SS	C	P
3.00	0.118	65088S	27.50	1.083	2.50	0.098	0.08	0.476	13.72	0.540	1.14	0.257	6.05	0.238	0.25	0.010	22.8	316 SS	C	P
3.00	0.118	65089S	30.00	1.181	2.50	0.098	0.08	0.436	14.96	0.589	1.14	0.257	6.55	0.258	0.25	0.010	24.8	316 SS	C	P
3.00	0.118	65129S	7.50	0.295	2.40	0.094	0.65	3.706	3.02	0.119	1.96	0.441	2.69	0.106	0.30	0.012	7.9	316 SS	C	P
3.00	0.118	65130S	10.00	0.394	2.40	0.094	0.47	2.686	4.17	0.164	1.96	0.441	3.38	0.133	0.30	0.012	10.1	316 SS	C	P
3.00	0.118	65131S	12.50	0.492	2.40	0.094	0.37	2.107	5.31	0.209	1.96	0.440	4.06	0.160	0.30	0.012	12.3	316 SS	C	P
3.00	0.118	65132S	15.00	0.591	2.40	0.094	0.30	1.733	6.45	0.254	1.96	0.440	4.75	0.187	0.30	0.012	14.6	316 SS	C	P
3.00	0.118	65133S	17.50	0.689	2.40	0.094	0.26	1.471	7.60	0.299	1.96	0.440	5.41	0.213	0.30	0.012	16.8	316 SS	C	P
3.00	0.118	65134S	20.00	0.787	2.40	0.094	0.22	1.279	8.74	0.344	1.96	0.440	6.10	0.240	0.30	0.012	19.0	316 SS	C	P
3.00	0.118	65135S	22.50	0.886	2.40	0.094	0.20	1.130	9.88	0.389	1.96	0.440	6.78	0.267	0.30	0.012	21.3	316 SS	C	P
3.00	0.118	65136S	25.00	0.984	2.40	0.094	0.18	1.013	11.02	0.434	1.96	0.440	7.47	0.294	0.30	0.012	23.5	316 SS	C	P
3.00	0.118	65137S	27.50	1.083	2.40	0.094	0.16	0.918	12.17	0.479	1.96	0.440	8.13	0.320	0.30	0.012	25.7	316 SS	C	P
3.00	0.118	65138S	30.00	1.181	2.40	0.094	0.15	0.839	13.31	0.524	1.96	0.440	8.81	0.347	0.30	0.012	27.9	316 SS	C	P
3.00	0.118	65189S	6.50	0.256	2.28	0.090	1.59	9.063	2.11	0.083	3.34	0.752	2.39	0.094	0.36	0.014	6.4	316 SS	CG	P
3.00	0.118	65190S	8.00	0.315	2.28	0.090	1.26	7.205	2.67	0.105	3.36	0.757	2.79	0.110	0.36	0.014	7.6	316 SS	CG	P
3.00	0.118	65191S	9.50	0.374	2.28	0.090	1.05	5.973	3.20	0.126	3.35	0.753	3.20	0.126	0.36	0.014	8.7	316 SS	CG	P
3.00	0.118	65192S	11.00	0.433	2.28	0.090	0.89	5.106	3.73	0.147	3.34	0.751	3.61	0.142	0.36	0.014	9.8	316 SS	CG	P
3.00	0.118	65193S	12.50	0.492	2.28	0.090	0.78	4.457	4.29	0.169	3.35	0.753	3.99	0.157	0.36	0.014	11.0	316 SS	CG	P
3.00	0.118	65194S	14.00	0.551	2.28	0.090	0.69	3.957	4.83	0.190	3.34	0.752	4.39	0.173	0.36	0.014	12.1	316 SS	CG	P
3.00	0.118	65195S	15.50	0.610	2.28	0.090	0.62	3.557	5.39	0.212	3.35	0.754	4.80	0.189	0.36	0.014	13.3	316 SS	CG	P
3.00	0.118	65196S	17.00	0.669	2.28	0.090	0.57	3.224	5.94	0.234	3.35	0.754	5.26	0.207	0.36	0.014	14.4	316 SS	CG	P
3.00	0.118	65197S	19.00	0.748	2.28	0.090	0.50	2.874	6.66	0.262	3.35	0.753	5.79	0.228	0.36	0.014	15.9	316 SS	CG	P
3.00	0.118	65198S	25.00	0.984	2.28	0.090	0.38	2.166	8.84	0.348	3.35	0.754	7.39	0.291	0.36	0.014	20.5	316 SS	CG	P
3.00	0.118	65199S	27.50	1.083	2.28	0.090	0.34	1.966	9.73	0.383	3.35	0.753	8.15	0.321	0.36	0.014	22.4	316 SS	CG	P
3.00	0.118	65200S	30.00	1.181	2.28	0.090	0.31	1.791	10.67	0.420	3.34	0.752	8.84	0.348	0.36	0.014	24.3	316 SS	CG	P
3.00	0.118	65201S	40.00	1.575	2.28	0.090	0.24	1.341	14.28	0.562	3.35	0.754	11.61	0.457	0.36	0.014	31.9	316 SS	CG	P
3.00	0.118	65226S	6.50	0.256	1.98	0.078	6.25	35.661	1.45	0.057	9.04	2.033	3.76	0.148	0.51	0.020	7.6	316 SS	CG	P
3.00	0.118	65227S	8.00	0.315	1.98	0.078	4.91	28.022	1.83	0.072	8.97	2.018	4.52	0.178	0.51	0.020	9.1	316 SS	CG	P
3.00	0.118	65228S	9.50	0.374	1.98	0.078	4.04	23.074	2.24	0.088	9.03	2.031	5.26	0.207	0.51	0.020	10.6	316 SS	CG	P
3.00	0.118																			




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Def. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends	Finish									
										Mat'l										
3.25	0.128	50036S	25.00	0.984	2.65	0.104	0.14	0.800	12.96	0.510	1.81	0.408	7.14	0.281	0.30	0.012	22.8	316 SS	C	P
3.25	0.128	50037S	30.00	1.181	2.65	0.104	0.11	0.630	16.49	0.649	1.81	0.408	8.43	0.332	0.30	0.012	27.1	316 SS	C	P
3.25	0.128	50038S	40.00	1.575	2.65	0.104	0.09	0.510	20.16	0.794	1.81	0.408	11.01	0.433	0.30	0.012	35.7	316 SS	C	P
3.45	0.136	50039S	5.00	0.197	2.65	0.104	2.20	12.560	1.78	0.070	3.91	0.880	2.72	0.107	0.40	0.016	5.8	316 SS	C	P
3.45	0.136	50040S	10.00	0.394	2.65	0.104	1.20	6.850	3.26	0.128	3.91	0.880	4.04	0.159	0.40	0.016	9.1	316 SS	C	P
3.45	0.136	50041S	15.00	0.591	2.65	0.104	0.61	3.480	6.42	0.253	3.91	0.880	6.56	0.258	0.40	0.016	15.4	316 SS	C	P
3.45	0.136	50042S	20.00	0.787	2.65	0.104	0.45	2.570	8.70	0.342	3.91	0.880	8.60	0.339	0.40	0.016	20.5	316 SS	C	P
3.45	0.136	50043S	30.00	1.181	2.65	0.104	0.30	1.710	13.05	0.514	3.91	0.880	12.24	0.482	0.40	0.016	29.6	316 SS	C	P
3.45	0.136	50044S	40.00	1.575	2.65	0.104	0.22	1.260	17.79	0.700	3.91	0.880	16.08	0.633	0.40	0.016	39.2	316 SS	C	P
3.45	0.136	65090S	7.10	0.280	2.95	0.116	0.29	1.676	3.40	0.134	1.00	0.225	1.63	0.064	0.25	0.010	5.5	316 SS	C	P
3.45	0.136	65091S	10.70	0.421	2.95	0.116	0.19	1.067	5.33	0.210	1.00	0.224	2.13	0.084	0.25	0.010	7.5	316 SS	C	P
3.45	0.136	65092S	16.10	0.634	2.95	0.116	0.12	0.690	8.26	0.325	1.00	0.224	2.87	0.113	0.25	0.010	10.5	316 SS	C	P
3.45	0.136	65093S	23.30	0.917	2.95	0.116	0.08	0.469	12.14	0.478	1.00	0.224	3.89	0.153	0.25	0.010	14.5	316 SS	C	P
3.45	0.136	65094S	34.10	1.343	2.95	0.116	0.06	0.317	17.96	0.707	1.00	0.224	5.39	0.212	0.25	0.010	20.5	316 SS	C	P
3.52	0.139	50045S	6.50	0.256	2.88	0.113	0.92	5.250	2.21	0.087	2.03	0.457	1.92	0.076	0.32	0.013	5.0	316 SS	C	P
3.52	0.139	65149S	6.30	0.248	2.88	0.113	0.79	4.499	2.57	0.101	2.02	0.454	2.08	0.082	0.32	0.013	5.5	316 SS	C	P
3.52	0.139	65150S	9.40	0.370	2.88	0.113	0.50	2.863	4.04	0.159	2.02	0.455	2.72	0.107	0.32	0.013	7.5	316 SS	C	P
3.52	0.139	65151S	14.00	0.551	2.88	0.113	0.33	1.853	6.25	0.246	2.03	0.456	3.68	0.145	0.32	0.013	10.5	316 SS	C	P
3.52	0.139	65152S	20.10	0.791	2.88	0.113	0.22	1.260	9.20	0.362	2.03	0.456	4.95	0.195	0.32	0.013	14.5	316 SS	C	P
3.52	0.139	65153S	29.30	1.154	2.88	0.113	0.15	0.851	13.61	0.536	2.03	0.456	6.88	0.271	0.32	0.013	20.5	316 SS	C	P
3.60	0.142	50046S	6.10	0.240	2.80	0.110	2.25	12.850	1.67	0.066	3.76	0.846	2.40	0.094	0.40	0.016	5.0	316 SS	C	P
3.60	0.142	65174S	5.60	0.220	2.80	0.110	1.92	10.985	1.96	0.077	3.76	0.846	2.59	0.102	0.40	0.016	5.5	316 SS	C	P
3.60	0.142	65175S	8.30	0.327	2.80	0.110	1.22	6.990	3.07	0.121	3.76	0.846	3.40	0.134	0.40	0.016	7.5	316 SS	C	P
3.60	0.142	65176S	12.00	0.472	2.80	0.110	0.79	4.523	4.75	0.187	3.76	0.846	4.60	0.181	0.40	0.016	10.5	316 SS	C	P
3.60	0.142	65177S	17.50	0.689	2.80	0.110	0.54	3.076	6.96	0.274	3.75	0.843	6.20	0.244	0.40	0.016	14.5	316 SS	C	P
3.60	0.142	65178S	25.50	1.004	2.80	0.110	0.36	2.078	10.31	0.406	3.75	0.844	8.61	0.339	0.40	0.016	20.5	316 SS	C	P
3.65	0.144	50047S	5.00	0.197	3.15	0.124	0.39	2.230	2.48	0.098	0.97	0.217	1.33	0.052	0.25	0.010	4.3	316 SS	C	P
3.65	0.144	50048S	5.00	0.197	2.65	0.104	5.20	29.690	1.37	0.054	7.13	1.604	2.75	0.108	0.50	0.020	5.5	316 SS	CG	P
3.65	0.144	50049S	10.00	0.394	2.65	0.104	2.30	13.130	3.10	0.122	7.13	1.603	5.05	0.199	0.50	0.020	10.1	316 SS	CG	P
3.65	0.144	50050S	20.00	0.787	2.65	0.104	1.10	6.280	6.48	0.255	7.13	1.603	9.60	0.378	0.50	0.020	19.2	316 SS	CG	P
3.65	0.144	50051S	25.00	0.984	3.15	0.124	0.06	0.340	16.10	0.634	0.97	0.217	4.25	0.167	0.25	0.010	16.0	316 SS	C	P
3.65	0.144	50052S	25.00	0.984	2.65	0.104	0.79	4.510	9.03	0.355	7.13	1.603	11.85	0.467	0.50	0.020	23.7	316 SS	CG	P
3.65	0.144	50053S	30.00	1.181	2.65	0.104	0.69	3.940	10.34	0.407	7.13	1.603	14.15	0.557	0.50	0.020	28.3	316 SS	CG	P
3.65	0.144	50054S	35.00	1.378	2.65	0.104	0.59	3.370	12.09	0.476	7.13	1.603	16.40	0.646	0.50	0.020	32.8	316 SS	CG	P
3.70	0.146	50055S	5.90	0.232	2.70	0.106	5.48	31.290	1.29	0.051	7.04	1.583	2.50	0.098	0.50	0.020	5.0	316 SS	CG	P
3.70	0.146	50056S	25.00	0.984	2.70	0.106	0.91	5.200	7.74	0.305	7.04	1.584	10.00	0.394	0.50	0.020	20.0	316 SS	CG	P
3.70	0.146	65244S	5.50	0.217	2.70	0.106	4.70	26.819	1.50	0.059	7.03	1.582	2.74	0.108	0.50	0.020	5.5	316 SS	CG	P
3.70	0.146	65245S	7.90	0.311	2.70	0.106	2.99	17.066	2.36	0.093	7.05	1.587	3.76	0.148	0.50	0.020	7.5	316 SS	CG	P
3.70	0.146	65246S	11.50	0.453	2.70	0.106	1.93	11.043	3.63	0.143	7.02	1.579	5.26	0.207	0.50	0.020	10.5	316 SS	CG	P
3.70	0.146	65247S	16.00	0.630	2.70	0.106	1.32	7.509	5.33	0.210	7.01	1.577	7.24	0.285	0.50	0.020	14.5	316 SS	CG	P
3.70	0.146	65248S	23.50	0.925	2.70	0.106	0.89	5.074	7.90	0.311	7.01	1.578	10.26	0.404	0.50	0.020	20.5	316 SS	CG	P
3.71	0.146	65312S	6.50	0.256	2.49	0.098	7.79	44.457	1.60	0.063	12.45	2.801	4.09	0.161	0.61	0.024	6.8	316 SS	CG	P
3.71	0.146	65313S	8.00	0.315	2.49	0.098	6.07	34.636	2.06	0.081	12.47	2.806	4.90	0.193	0.61	0.024	8.1	316 SS	CG	P
3.71	0.146	65314S	9.50	0.374	2.49	0.098	4.97	28.380	2.52	0.099	12.49	2.810	5.72	0.225	0.61	0.024	9.5	316 SS	CG	P
3.71	0.146	65315S	11.00	0.433	2.49	0.098	4.21	24.032	2.97	0.117	12.50	2.812	6.55	0.258	0.61	0.024	10.8	316 SS	CG	P
3.71	0.146	65316S	12.50	0.492	2.49	0.098	3.65	20.842	3.43	0.135	12.51	2.814	7.37	0.290	0.61	0.024	12.1	316 SS	CG	P
3.71	0.146	65317S	14.00	0.551	2.49	0.098	3.22	18.401	3.89	0.153	12.51	2.815	8.18	0.322	0.61	0.024	13.5	316 SS	CG	P
3.71	0.146	65318S	15.50	0.610	2.49	0.098	2.88	16.468	4.34	0.171	12.52	2.816	8.99	0.354	0.61	0.024	14.8	316 SS	CG	P
3.71	0.146	65319S	17.00	0.669	2.49	0.098	2.61	14.911	4.80	0.189	12.52	2.818	9.80	0.386	0.61	0.024	16.2	316 SS	CG	P
3.71	0.146	65320S	19.00	0.748	2.49	0.098	2.32	13.236	5.41	0.213	12.53	2.819	10.90	0.429	0.61	0.024	18.0	316 SS	CG	P
3.71	0.146	65321S	25.00	0.984	2.49	0.098	1.73	9.896	7.21	0.284	12.49	2.810	14.17	0.558	0.61	0.024	23.4	316 SS	CG	P
3.71	0.146	65322S	27.50	1.083	2.49	0.098	1.57	8.955	7.98	0.314	12.50	2.812	15.55	0.612	0.61	0.024	25.6	316 SS	CG	P
3.71	0.146	65323S	30.00	1.181	2.49	0.098	1.43	8.180	8.74	0.344	12.51	2.814	16.89	0.665	0.61	0.024	27.8	316 SS	CG	P
3.71	0.146	65324S	40.00	1.575</td																




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches		I.D. mm Inches		Rate N/mm Lbs./In.		Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches		Total Coils	Mat'l	Ends	Finish		
4.32	0.170	65158S	41.90	1.650	3.68	0.144	0.08	0.436	21.90	0.862	1.67	0.376	6.88	0.271	0.32	0.013	20.5	316 SS C P
4.40	0.173	50077S	8.10	0.319	3.60	0.142	1.15	6.570	2.71	0.107	3.11	0.700	2.40	0.094	0.40	0.016	5.0	316 SS C P
4.40	0.173	65179S	7.50	0.295	3.60	0.141	0.99	5.624	3.15	0.124	3.10	0.697	2.59	0.102	0.40	0.016	5.5	316 SS C P
4.40	0.173	65180S	11.00	0.433	3.60	0.141	0.63	3.579	4.98	0.196	3.12	0.701	3.40	0.134	0.40	0.016	7.5	316 SS C P
4.40	0.173	65181S	16.50	0.650	3.60	0.141	0.41	2.316	7.67	0.302	3.11	0.699	4.60	0.181	0.40	0.016	10.5	316 SS C P
4.40	0.173	65182S	24.00	0.945	3.60	0.141	0.28	1.575	11.28	0.444	3.11	0.699	6.20	0.244	0.40	0.016	14.5	316 SS C P
4.40	0.173	65183S	35.50	1.398	3.60	0.141	0.19	1.064	16.71	0.658	3.11	0.700	8.61	0.339	0.40	0.016	20.5	316 SS C P
4.50	0.177	50078S	7.50	0.295	3.50	0.138	2.81	16.050	2.09	0.082	5.88	1.322	2.50	0.098	0.50	0.020	5.0	316 SS CG P
4.50	0.177	65249S	7.00	0.276	3.50	0.137	2.36	13.480	2.49	0.098	5.87	1.321	2.74	0.108	0.50	0.020	5.5	316 SS CG P
4.50	0.177	65250S	10.00	0.394	3.50	0.137	1.51	8.630	3.89	0.153	5.87	1.320	3.76	0.148	0.50	0.020	7.5	316 SS CG P
4.50	0.177	65251S	15.00	0.591	3.50	0.137	0.99	5.654	5.94	0.234	5.88	1.323	5.26	0.207	0.50	0.020	10.5	316 SS CG P
4.50	0.177	65252S	21.50	0.846	3.50	0.137	0.67	3.845	8.74	0.344	5.88	1.323	7.24	0.285	0.50	0.020	14.5	316 SS CG P
4.50	0.177	65253S	31.00	1.220	3.50	0.137	0.46	2.598	12.93	0.509	5.88	1.322	10.26	0.404	0.50	0.020	20.5	316 SS CG P
4.60	0.181	65202S	6.50	0.256	3.88	0.153	0.81	4.640	2.74	0.108	2.23	0.501	1.42	0.056	0.36	0.014	4.1	316 SS CG P
4.60	0.181	65203S	8.00	0.315	3.88	0.153	0.65	3.690	3.45	0.136	2.23	0.502	1.60	0.063	0.36	0.014	4.6	316 SS CG P
4.60	0.181	65204S	9.50	0.374	3.88	0.153	0.54	3.057	4.17	0.164	2.23	0.501	1.80	0.071	0.36	0.014	5.2	316 SS CG P
4.60	0.181	65205S	11.00	0.433	3.88	0.153	0.46	2.616	4.88	0.192	2.23	0.502	1.98	0.078	0.36	0.014	5.7	316 SS CG P
4.60	0.181	65206S	12.50	0.492	3.88	0.153	0.40	2.282	5.59	0.220	2.23	0.502	2.18	0.086	0.36	0.014	6.3	316 SS CG P
4.60	0.181	65207S	14.00	0.551	3.88	0.153	0.35	2.024	6.30	0.248	2.23	0.502	2.36	0.093	0.36	0.014	6.8	316 SS CG P
4.60	0.181	65208S	15.50	0.610	3.88	0.153	0.32	1.816	7.01	0.276	2.23	0.501	2.54	0.100	0.36	0.014	7.3	316 SS CG P
4.60	0.181	65209S	17.00	0.669	3.88	0.153	0.29	1.649	7.72	0.304	2.23	0.501	2.74	0.108	0.36	0.014	7.9	316 SS CG P
4.60	0.181	65210S	19.00	0.748	3.88	0.153	0.26	1.474	8.66	0.341	2.24	0.503	3.00	0.118	0.36	0.014	8.6	316 SS CG P
4.60	0.181	65211S	25.00	0.984	3.88	0.153	0.19	1.108	11.51	0.453	2.23	0.502	3.73	0.147	0.36	0.014	10.8	316 SS CG P
4.60	0.181	65212S	30.00	1.181	3.88	0.153	0.16	0.916	13.92	0.548	2.23	0.502	4.37	0.172	0.36	0.014	12.6	316 SS CG P
4.60	0.181	65213S	40.00	1.575	3.88	0.153	0.12	0.683	18.67	0.735	2.23	0.502	5.61	0.221	0.36	0.014	16.2	316 SS CG P
4.60	0.181	65214S	6.50	0.256	3.68	0.145	2.00	11.437	2.26	0.089	4.52	1.018	2.01	0.079	0.46	0.018	4.5	316 SS CG P
4.60	0.181	65215S	8.00	0.315	3.68	0.145	1.58	9.021	2.85	0.112	4.49	1.010	2.31	0.091	0.46	0.018	5.1	316 SS CG P
4.60	0.181	65216S	9.50	0.374	3.68	0.145	1.30	7.447	3.45	0.136	4.50	1.013	2.62	0.103	0.46	0.018	5.8	316 SS CG P
4.60	0.181	65217S	11.00	0.433	3.68	0.145	1.11	6.339	4.06	0.160	4.51	1.014	2.90	0.114	0.46	0.018	6.4	316 SS CG P
4.60	0.181	65218S	12.50	0.492	3.68	0.145	0.97	5.523	4.67	0.184	4.52	1.016	3.20	0.126	0.46	0.018	7.1	316 SS CG P
4.60	0.181	65219S	14.00	0.551	3.68	0.145	0.86	4.890	5.26	0.207	4.50	1.012	3.51	0.138	0.46	0.018	7.8	316 SS CG P
4.60	0.181	65220S	15.50	0.610	3.68	0.145	0.77	4.390	5.87	0.231	4.51	1.014	3.79	0.149	0.46	0.018	8.4	316 SS CG P
4.60	0.181	65221S	17.00	0.669	3.68	0.145	0.70	3.982	6.48	0.255	4.51	1.015	4.09	0.161	0.46	0.018	9.1	316 SS CG P
4.60	0.181	65222S	19.00	0.748	3.68	0.145	0.62	3.540	7.26	0.286	4.50	1.012	4.50	0.177	0.46	0.018	10.0	316 SS CG P
4.60	0.181	65223S	25.00	0.984	3.68	0.145	0.47	2.657	9.70	0.382	4.51	1.015	5.69	0.224	0.46	0.018	12.6	316 SS CG P
4.60	0.181	65224S	30.00	1.181	3.68	0.145	0.39	2.199	11.71	0.461	4.51	1.014	6.68	0.263	0.46	0.018	14.8	316 SS CG P
4.60	0.181	65225S	40.00	1.575	3.68	0.145	0.29	1.641	15.70	0.618	4.51	1.014	8.66	0.341	0.46	0.018	19.2	316 SS CG P
4.60	0.181	65280S	6.50	0.256	3.48	0.137	3.93	22.458	2.03	0.080	7.99	1.797	2.77	0.109	0.56	0.022	5.1	316 SS CG P
4.60	0.181	65281S	8.00	0.315	3.48	0.137	3.08	17.576	2.62	0.103	8.04	1.810	3.23	0.127	0.56	0.022	5.9	316 SS CG P
4.60	0.181	65282S	9.50	0.374	3.48	0.137	2.53	14.436	3.18	0.125	8.02	1.805	3.68	0.145	0.56	0.022	6.8	316 SS CG P
4.60	0.181	65283S	11.00	0.433	3.48	0.137	2.15	12.245	3.76	0.148	8.05	1.812	4.14	0.163	0.56	0.022	7.6	316 SS CG P
4.60	0.181	65284S	12.50	0.492	3.48	0.137	1.86	10.637	4.32	0.170	8.04	1.808	4.60	0.181	0.56	0.022	8.4	316 SS CG P
4.60	0.181	65285S	14.00	0.551	3.48	0.137	1.65	9.396	4.88	0.192	8.02	1.804	5.06	0.199	0.56	0.022	9.3	316 SS CG P
4.60	0.181	65286S	15.50	0.610	3.48	0.137	1.48	8.422	5.46	0.215	8.05	1.811	5.54	0.218	0.56	0.022	10.1	316 SS CG P
4.60	0.181	65287S	17.00	0.669	3.48	0.137	1.34	7.630	6.02	0.237	8.04	1.808	5.99	0.236	0.56	0.022	11.0	316 SS CG P
4.60	0.181	65288S	19.00	0.748	3.48	0.137	1.19	6.772	6.78	0.267	8.04	1.808	6.60	0.260	0.56	0.022	12.1	316 SS CG P
4.60	0.181	65289S	25.00	0.984	3.48	0.137	0.89	5.073	9.04	0.356	8.03	1.806	8.43	0.332	0.56	0.022	15.5	316 SS CG P
4.60	0.181	65290S	27.50	1.083	3.48	0.137	0.80	4.590	10.01	0.394	8.04	1.808	9.22	0.363	0.56	0.022	16.9	316 SS CG P
4.60	0.181	65291S	30.00	1.181	3.48	0.137	0.74	4.198	10.92	0.430	8.02	1.805	9.98	0.393	0.56	0.022	18.3	316 SS CG P
4.60	0.181	65292S	40.00	1.575	3.48	0.137	0.55	3.115	14.73	0.580	8.03	1.807	13.06	0.514	0.56	0.022	24.0	316 SS CG P
4.60	0.181	65325S	6.50	0.256	3.38	0.133	5.68	32.412	1.83	0.072	10.37	2.334	3.05	0.120	0.61	0.024	5.1	316 SS CG P
4.60	0.181	65326S	8.00	0.315	3.38	0.133	4.43	25.265	2.34	0.092	10.33	2.324	3.56	0.140	0.61	0.024	5.9	316 SS CG P
4.60	0.181	65327S	9.50	0.374	3.38	0.133	3.63	20.700	2.85	0.112	10.30	2.318	4.09	0.161	0.61	0.024	6.8	316 SS CG P
4.60	0.181	65328S	11.00	0.433	3.38	0.133	3.07	17.526	3.35	0.132	10.28	2.313	4.60	0.181	0.61	0.024	7.7	316 SS CG P
4.60	0.181	65329S	12.50	0.492	3.38	0.133	2.66	15.202	3.89	0.153	10.34	2.326	5.13	0.202	0.61	0.024	8.5	316 SS CG P
4.60	0.181	65330S	14.00	0.551	3.38	0.133	2.35	13.420	4.39	0.173	10.32	2.322	5.66	0.223	0.61	0.024	9.4	316 SS CG P
4.60																		




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length		I.D.		Rate		Sugg Max. Defl.	Sugg Max. load	Solid Length		Wire Dia.		Total Coils	Ends	Finish		
		mm	Inches	mm	Inches	N/mm	Lbs./In.	mm	Inches	N	Lbs.	mm	Inches	mm	Inches			
4.63	0.182	50079S	6.40	0.252	3.37	0.133	7.08	40.430	1.59	0.063	11.25	2.529	3.15	0.124	0.63	0.025	5.0	316SS CG P
4.63	0.182	65355S	6.70	0.264	3.37	0.132	6.06	34.609	1.85	0.073	11.23	2.526	3.45	0.136	0.63	0.025	5.5	316SS CG P
4.63	0.182	65356S	9.60	0.378	3.37	0.132	3.86	22.024	2.92	0.115	11.26	2.533	4.72	0.186	0.63	0.025	7.5	316SS CG P
4.63	0.182	65357S	14.00	0.551	3.37	0.132	2.50	14.251	4.52	0.178	11.28	2.537	6.60	0.260	0.63	0.025	10.5	316SS CG P
4.63	0.182	65358S	20.00	0.787	3.37	0.132	1.70	9.691	6.63	0.261	11.24	2.529	9.14	0.360	0.63	0.025	14.5	316SS CG P
4.63	0.182	65359S	29.00	1.142	3.37	0.132	1.15	6.548	9.83	0.387	11.26	2.534	12.90	0.508	0.63	0.025	20.5	316SS CG P
4.80	0.189	50080S	6.00	0.236	3.20	0.126	18.40	105.070	1.18	0.047	21.75	4.889	4.00	0.157	0.80	0.031	5.0	316SS CG P
4.80	0.189	50081S	6.90	0.272	3.20	0.126	17.00	97.070	1.28	0.050	21.74	4.888	4.40	0.173	0.80	0.031	5.5	316SS CG P
4.80	0.189	50082S	8.70	0.343	3.20	0.126	11.04	63.040	1.97	0.078	21.75	4.889	5.60	0.220	0.80	0.031	7.0	316SS CG P
4.80	0.189	50083S	9.70	0.382	3.20	0.126	11.00	62.810	1.98	0.078	21.75	4.889	6.00	0.236	0.80	0.031	7.5	316SS CG P
4.80	0.189	50084S	13.00	0.512	3.20	0.126	6.90	39.400	3.15	0.124	21.75	4.889	8.00	0.315	0.80	0.031	10.0	316SS CG P
4.80	0.189	50085S	14.00	0.551	3.20	0.126	6.90	39.400	3.15	0.124	21.75	4.889	8.40	0.331	0.80	0.031	10.5	316SS CG P
4.80	0.189	50086S	18.00	0.709	3.20	0.126	4.60	26.270	4.73	0.186	21.75	4.889	11.20	0.441	0.80	0.031	14.0	316SS CG P
4.80	0.189	50087S	20.00	0.787	3.20	0.126	4.70	26.840	4.63	0.182	21.75	4.890	11.60	0.457	0.80	0.031	14.5	316SS CG P
4.80	0.189	50088S	28.00	1.102	3.20	0.126	3.20	18.270	6.80	0.268	21.75	4.890	16.40	0.646	0.80	0.031	20.5	316SS CG P
4.80	0.189	65424S	6.90	0.272	3.20	0.125	15.76	89.989	1.37	0.054	21.60	4.859	4.39	0.173	0.80	0.032	5.5	316SS CG P
4.80	0.189	65425S	9.70	0.382	3.20	0.125	10.03	57.266	2.16	0.085	21.64	4.868	5.99	0.236	0.80	0.032	7.5	316SS CG P
4.80	0.189	65426S	14.00	0.551	3.20	0.125	6.49	37.054	3.35	0.132	21.74	4.891	8.41	0.331	0.80	0.032	10.5	316SS CG P
4.80	0.189	65427S	19.50	0.768	3.20	0.125	4.41	25.197	4.93	0.194	21.72	4.888	11.61	0.457	0.80	0.032	14.5	316SS CG P
4.80	0.189	65428S	28.00	1.102	3.20	0.125	2.98	17.025	7.29	0.287	21.72	4.886	16.41	0.646	0.80	0.032	20.5	316SS CG P
5.00	0.197	50089S	5.00	0.197	4.20	0.165	1.40	7.990	1.97	0.077	2.75	0.619	1.88	0.074	0.40	0.016	3.7	316SS C P
5.00	0.197	50090S	10.00	0.394	4.20	0.165	0.57	3.250	4.83	0.190	2.75	0.619	2.88	0.113	0.40	0.016	6.2	316SS C P
5.00	0.197	50091S	30.00	1.181	4.20	0.165	0.17	0.970	16.20	0.638	2.75	0.619	6.80	0.268	0.40	0.016	16.0	316SS C P
5.00	0.197	50092S	40.00	1.575	4.20	0.165	0.12	0.690	22.95	0.904	2.75	0.619	8.80	0.346	0.40	0.016	21.0	316SS C P
5.20	0.205	50093S	10.00	0.394	4.20	0.165	1.10	6.280	4.66	0.184	5.13	1.153	3.35	0.132	0.50	0.020	6.7	316SS CG P
5.20	0.205	50094S	25.00	0.984	4.20	0.165	0.40	2.280	12.82	0.505	5.13	1.153	7.50	0.295	0.50	0.020	15.0	316SS CG P
5.20	0.205	50095S	35.00	1.378	4.20	0.165	0.30	1.710	17.10	0.673	5.13	1.153	10.25	0.404	0.50	0.020	20.5	316SS CG P
5.40	0.213	50096S	10.00	0.394	4.20	0.165	2.10	11.990	4.03	0.159	8.46	1.903	4.20	0.165	0.60	0.024	7.0	316SS CG P
5.40	0.213	50097S	15.00	0.591	4.20	0.165	1.30	7.420	6.51	0.256	8.46	1.903	6.00	0.236	0.60	0.024	10.0	316SS CG P
5.40	0.213	50098S	20.00	0.787	4.20	0.165	0.98	5.600	8.64	0.340	8.46	1.903	7.74	0.305	0.60	0.024	12.9	316SS CG P
5.40	0.213	50099S	25.00	0.984	4.20	0.165	0.77	4.400	10.99	0.433	8.46	1.903	9.48	0.373	0.60	0.024	15.8	316SS CG P
5.40	0.213	50100S	30.00	1.181	4.20	0.165	0.64	3.650	13.23	0.521	8.46	1.903	11.28	0.444	0.60	0.024	18.8	316SS CG P
5.40	0.213	50101S	40.00	1.575	4.20	0.165	0.47	2.680	18.01	0.709	8.46	1.903	14.76	0.581	0.60	0.024	24.6	316SS CG P
5.40	0.213	50102S	50.00	1.969	4.20	0.165	0.38	2.170	22.27	0.877	8.46	1.903	18.30	0.720	0.60	0.024	30.5	316SS CG P
5.40	0.213	65184S	10.50	0.413	4.60	0.181	0.50	2.880	5.06	0.199	2.55	0.573	2.59	0.102	0.40	0.016	5.5	316SS C P
5.40	0.213	65185S	16.00	0.630	4.60	0.181	0.32	1.832	7.95	0.313	2.55	0.573	3.40	0.134	0.40	0.016	7.5	316SS C P
5.40	0.213	65186S	24.00	0.945	4.60	0.181	0.21	1.186	12.29	0.484	2.55	0.574	4.60	0.181	0.40	0.016	10.5	316SS C P
5.40	0.213	65187S	35.00	1.378	4.60	0.181	0.14	0.806	18.09	0.712	2.55	0.574	6.20	0.244	0.40	0.016	14.5	316SS C P
5.40	0.213	65188S	53.00	2.087	4.60	0.181	0.10	0.545	26.75	1.053	2.55	0.574	8.61	0.339	0.40	0.016	20.5	316SS C P
5.50	0.217	65254S	9.40	0.370	4.50	0.177	1.23	7.030	3.94	0.155	4.84	1.090	2.74	0.108	0.50	0.020	5.5	316SS CG P
5.50	0.217	65255S	14.00	0.551	4.50	0.177	0.78	4.474	6.20	0.244	4.85	1.092	3.76	0.148	0.50	0.020	7.5	316SS CG P
5.50	0.217	65256S	20.50	0.807	4.50	0.177	0.51	2.895	9.58	0.377	4.85	1.091	5.26	0.207	0.50	0.020	10.5	316SS CG P
5.50	0.217	65257S	30.00	1.181	4.50	0.177	0.35	1.969	14.07	0.554	4.85	1.091	7.24	0.285	0.50	0.020	14.5	316SS CG P
5.50	0.217	65258S	44.50	1.752	4.50	0.177	0.23	1.330	20.83	0.820	4.85	1.091	10.26	0.404	0.50	0.020	20.5	316SS CG P
5.63	0.222	50103S	8.30	0.327	4.37	0.172	3.62	20.670	2.60	0.102	9.39	2.112	3.15	0.124	0.63	0.025	5.0	316SS CG P
5.63	0.222	65360S	8.50	0.335	4.37	0.172	3.10	17.720	3.02	0.119	9.37	2.109	3.45	0.136	0.63	0.025	5.5	316SS CG P
5.63	0.222	65361S	12.50	0.492	4.37	0.172	1.98	11.276	4.75	0.187	9.37	2.109	4.72	0.186	0.63	0.025	7.5	316SS CG P
5.63	0.222	65362S	18.50	0.728	4.37	0.172	1.27	7.230	7.42	0.292	9.38	2.111	6.60	0.260	0.63	0.025	10.5	316SS CG P
5.63	0.222	65363S	26.00	1.024	4.37	0.172	0.87	4.962	10.80	0.425	9.37	2.109	9.14	0.360	0.63	0.025	14.5	316SS CG P
5.63	0.222	65364S	38.50	1.516	4.37	0.172	0.59	3.352	15.98	0.629	9.37	2.108	12.90	0.508	0.63	0.025	20.5	316SS CG P
5.70	0.224	50104S	10.00	0.394	4.20	0.165	4.50	25.700	3.44	0.135	15.47	3.477	5.48	0.216	0.75	0.030	7.3	316SS CG P
5.70	0.224	50105S	15.00	0.591	4.20	0.165	2.80	15.990	5.52	0.217	15.47	3.477	7.80	0.307	0.75	0.030	10.4	316SS CG P
5.70	0.224	50106S	20.00	0.787	4.20	0.165	2.10	11.990	7.37	0.290	15.47	3.477	10.13	0.399	0.75	0.030	13.5	316SS CG P
5.70	0.224	50107S	25.00	0.984	4.20	0.165	1.60	9.140	9.67	0.381	15.47	3.477	12.45	0.490	0.75	0.030	16.6	316SS CG P
5.70	0.224	50108S	30.00	1.181	4.20	0.165	1.30	7.420	11.90	0.468	15.47	3.477	14.85	0.585	0.75	0.030	19.8	316SS CG P




Metric 316 Stainless Steel Compression

O.D. mm	Century Stock Number	Free Length mm	I.D. mm	Rate N/mm	Sugg Max. Defl. mm	Sugg Max. load N	Solid Length mm	Wire Dia. mm	Total Coils	Ends	Finish									
		Inches	Inches	Lbs./In.	Inches	Lbs.	Inches	Inches	Mat'l											
5.99	0.236	65266S	17.00	0.669	4.97	0.196	0.56	3.199	8.48	0.334	4.75	1.068	3.89	0.153	0.51	0.020	7.8	316 SS	CG	P
5.99	0.236	65267S	19.00	0.748	4.97	0.196	0.50	2.849	9.53	0.375	4.75	1.068	4.24	0.167	0.51	0.020	8.5	316 SS	CG	P
5.99	0.236	65268S	25.00	0.984	4.97	0.196	0.37	2.132	12.73	0.501	4.75	1.068	5.33	0.210	0.51	0.020	10.7	316 SS	CG	P
5.99	0.236	65269S	27.50	1.083	4.97	0.196	0.34	1.933	14.05	0.553	4.75	1.069	5.77	0.227	0.51	0.020	11.6	316 SS	CG	P
5.99	0.236	65270S	30.00	1.181	4.97	0.196	0.31	1.766	15.37	0.605	4.75	1.068	6.22	0.245	0.51	0.020	12.5	316 SS	CG	P
5.99	0.236	65271S	35.00	1.378	4.97	0.196	0.26	1.508	18.01	0.709	4.75	1.069	7.14	0.281	0.51	0.020	14.3	316 SS	CG	P
5.99	0.236	65272S	40.00	1.575	4.97	0.196	0.23	1.316	20.63	0.812	4.75	1.069	8.03	0.316	0.51	0.020	16.1	316 SS	CG	P
5.99	0.236	65273S	45.00	1.772	4.97	0.196	0.20	1.166	23.29	0.917	4.75	1.069	8.94	0.352	0.51	0.020	18.0	316 SS	CG	P
5.99	0.236	65274S	50.00	1.969	4.97	0.196	0.18	1.050	25.86	1.018	4.75	1.069	9.83	0.387	0.51	0.020	19.7	316 SS	CG	P
5.99	0.236	65339S	6.50	0.256	4.77	0.188	3.12	17.785	2.59	0.102	8.06	1.814	2.57	0.101	0.61	0.024	4.3	316 SS	CG	P
5.99	0.236	65340S	8.00	0.315	4.77	0.188	2.43	13.861	3.33	0.131	8.07	1.816	2.95	0.116	0.61	0.024	4.9	316 SS	CG	P
5.99	0.236	65341S	9.50	0.374	4.77	0.188	1.99	11.354	4.06	0.160	8.08	1.817	3.33	0.131	0.61	0.024	5.6	316 SS	CG	P
5.99	0.236	65342S	11.00	0.433	4.77	0.188	1.69	9.621	4.78	0.188	8.04	1.809	3.73	0.147	0.61	0.024	6.2	316 SS	CG	P
5.99	0.236	65343S	12.50	0.492	4.77	0.188	1.46	8.338	5.51	0.217	8.04	1.809	4.12	0.162	0.61	0.024	6.9	316 SS	CG	P
5.99	0.236	65344S	14.00	0.551	4.77	0.188	1.29	7.364	6.25	0.246	8.05	1.812	4.50	0.177	0.61	0.024	7.5	316 SS	CG	P
5.99	0.236	65345S	15.50	0.610	4.77	0.188	1.15	6.589	6.99	0.275	8.05	1.812	4.88	0.192	0.61	0.024	8.1	316 SS	CG	P
5.99	0.236	65346S	17.00	0.669	4.77	0.188	1.04	5.964	7.72	0.304	8.06	1.813	5.26	0.207	0.61	0.024	8.8	316 SS	CG	P
5.99	0.236	65347S	19.00	0.748	4.77	0.188	0.93	5.298	8.69	0.342	8.05	1.812	5.79	0.228	0.61	0.024	9.6	316 SS	CG	P
5.99	0.236	65348S	25.00	0.984	4.77	0.188	0.69	3.965	11.61	0.457	8.05	1.812	7.34	0.289	0.61	0.024	12.2	316 SS	CG	P
5.99	0.236	65349S	27.50	1.083	4.77	0.188	0.63	3.582	12.85	0.506	8.05	1.812	7.98	0.314	0.61	0.024	13.3	316 SS	CG	P
5.99	0.236	65350S	30.00	1.181	4.77	0.188	0.57	3.274	14.05	0.553	8.05	1.811	8.61	0.339	0.61	0.024	14.4	316 SS	CG	P
5.99	0.236	65351S	35.00	1.378	4.77	0.188	0.49	2.791	16.49	0.649	8.05	1.811	9.91	0.390	0.61	0.024	16.5	316 SS	CG	P
5.99	0.236	65352S	40.00	1.575	4.77	0.188	0.43	2.432	18.92	0.745	8.05	1.812	11.20	0.441	0.61	0.024	18.6	316 SS	CG	P
5.99	0.236	65353S	45.00	1.772	4.77	0.188	0.38	2.149	21.41	0.843	8.05	1.812	12.47	0.491	0.61	0.024	20.8	316 SS	CG	P
5.99	0.236	65354S	50.00	1.969	4.77	0.188	0.34	1.933	23.80	0.937	8.05	1.811	13.77	0.542	0.61	0.024	22.9	316 SS	CG	P
5.99	0.236	65434S	6.50	0.256	4.37	0.172	11.60	66.232	1.60	0.063	18.55	4.173	3.33	0.131	0.81	0.032	4.2	316 SS	CG	P
5.99	0.236	65435S	8.00	0.315	4.37	0.172	8.88	50.705	2.08	0.082	18.48	4.158	3.86	0.152	0.81	0.032	4.8	316 SS	CG	P
5.99	0.236	65436S	9.50	0.374	4.37	0.172	7.20	41.084	2.57	0.101	18.44	4.149	4.39	0.173	0.81	0.032	5.5	316 SS	CG	P
5.99	0.236	65437S	11.00	0.433	4.37	0.172	6.05	34.528	3.05	0.120	18.41	4.143	4.93	0.194	0.81	0.032	6.2	316 SS	CG	P
5.99	0.236	65438S	12.50	0.492	4.37	0.172	5.21	29.771	3.56	0.140	18.52	4.168	5.46	0.215	0.81	0.032	6.8	316 SS	CG	P
5.99	0.236	65439S	14.00	0.551	4.37	0.172	4.58	26.173	4.04	0.159	18.50	4.162	5.97	0.235	0.81	0.032	7.5	316 SS	CG	P
5.99	0.236	65440S	15.50	0.610	4.37	0.172	4.09	23.349	4.52	0.178	18.47	4.156	6.50	0.256	0.81	0.032	8.2	316 SS	CG	P
5.99	0.236	65441S	17.00	0.669	4.37	0.172	3.69	21.075	5.00	0.197	18.45	4.152	7.04	0.277	0.81	0.032	8.8	316 SS	CG	P
5.99	0.236	65442S	19.00	0.748	4.37	0.172	3.27	18.651	5.66	0.223	18.48	4.159	7.75	0.305	0.81	0.032	9.7	316 SS	CG	P
5.99	0.236	65443S	25.00	0.984	4.37	0.172	2.43	13.869	7.62	0.300	18.49	4.161	9.86	0.388	0.81	0.032	12.4	316 SS	CG	P
5.99	0.236	65444S	27.50	1.083	4.37	0.172	2.19	12.528	8.43	0.332	18.48	4.159	10.74	0.423	0.81	0.032	13.5	316 SS	CG	P
5.99	0.236	65445S	30.00	1.181	4.37	0.172	2.00	11.429	9.25	0.364	18.49	4.160	11.63	0.458	0.81	0.032	14.6	316 SS	CG	P
5.99	0.236	65446S	35.00	1.378	4.37	0.172	1.70	9.713	10.87	0.428	18.48	4.157	13.39	0.527	0.81	0.032	16.8	316 SS	CG	P
5.99	0.236	65447S	40.00	1.575	4.37	0.172	1.48	8.455	12.50	0.492	18.49	4.160	15.16	0.597	0.81	0.032	19.0	316 SS	CG	P
5.99	0.236	65448S	45.00	1.772	4.37	0.172	1.31	7.480	14.12	0.556	18.48	4.159	16.92	0.666	0.81	0.032	21.2	316 SS	CG	P
5.99	0.236	65449S	50.00	1.969	4.37	0.172	1.17	6.706	15.75	0.620	18.48	4.158	18.69	0.736	0.81	0.032	23.5	316 SS	CG	P
5.99	0.236	65575S	8.00	0.315	3.81	0.150	33.85	193.281	1.27	0.050	42.95	9.664	5.69	0.224	1.09	0.043	5.2	316 SS	CG	P
5.99	0.236	65576S	9.50	0.374	3.81	0.150	26.89	153.564	1.58	0.062	42.32	9.521	6.58	0.259	1.09	0.043	6.0	316 SS	CG	P
5.99	0.236	65577S	11.00	0.433	3.81	0.150	22.31	127.391	1.91	0.075	42.46	9.554	7.49	0.295	1.09	0.043	6.8	316 SS	CG	P
5.99	0.236	65578S	12.50	0.492	3.81	0.150	19.06	108.840	2.24	0.088	42.57	9.578	8.38	0.330	1.09	0.043	7.6	316 SS	CG	P
5.99	0.236	65579S	14.00	0.551	3.81	0.150	16.64	95.004	2.57	0.101	42.64	9.595	9.30	0.366	1.09	0.043	8.5	316 SS	CG	P
5.99	0.236	65580S	15.50	0.610	3.81	0.150	14.76	84.291	2.90	0.114	42.71	9.609	10.19	0.401	1.09	0.043	9.3	316 SS	CG	P
5.99	0.236	65581S	17.00	0.669	3.81	0.150	13.27	75.745	3.20	0.126	42.42	9.544	11.10	0.437	1.09	0.043	10.1	316 SS	CG	P
5.99	0.236	65582S	19.00	0.748	3.81	0.150	11.69	66.732	3.66	0.144	42.71	9.609	12.29	0.484	1.09	0.043	11.2	316 SS	CG	P
5.99	0.236	65583S	22.00	0.866	3.81	0.150	9.92	56.619	4.29	0.169	42.53	9.569	14.10	0.555	1.09	0.043	12.8	316 SS	CG	P
5.99	0.236	65584S	25.00	0.984	3.81	0.150	8.61	49.172	4.95	0.195	42.62	9.589	15.90	0.626	1.09	0.043	14.5	316 SS	CG	P
5.99	0.236	65585S	27.50	1.083	3.81	0.150	7.76	44.307	5.49	0.216	42.53	9.570	17.40	0.685	1.09	0.043	15.9	316 SS	CG	P
5.99	0.236	65586S	30.00	1.181	3.81	0.150	7.06	40.326	6.05	0.238	42.66	9.598	18.90	0.744	1.09	0.043	17.2	316 SS	CG	P
5.99	0.236	65587S	35.00																	




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Def. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends Mat'l	Ends F nsh									
6.40	0.252	50133S	20.00	0.787	5.20	0.205	0.76	4.340	9.49	0.374	7.21	1.621	6.00	0.236	0.60	0.024	10.0	316SS	CG	P
6.40	0.252	50134S	25.00	0.984	5.20	0.205	0.60	3.430	12.02	0.473	7.21	1.621	7.26	0.286	0.60	0.024	12.1	316SS	CG	P
6.40	0.252	50135S	35.00	1.378	5.20	0.205	0.42	2.400	17.17	0.676	7.21	1.621	9.90	0.390	0.60	0.024	16.5	316SS	CG	P
6.40	0.252	50136S	45.00	1.772	5.20	0.205	0.32	1.830	22.53	0.887	7.21	1.621	12.54	0.494	0.60	0.024	20.9	316SS	CG	P
6.40	0.252	50137S	55.00	2.165	5.20	0.205	0.26	1.480	27.74	1.092	7.21	1.621	15.12	0.595	0.60	0.024	25.2	316SS	CG	P
6.70	0.264	50138S	10.00	0.394	5.20	0.205	3.50	19.990	3.81	0.150	13.32	2.994	4.43	0.174	0.75	0.030	5.9	316SS	CG	P
6.70	0.264	50139S	15.00	0.591	5.20	0.205	2.20	12.560	6.05	0.238	13.32	2.994	6.15	0.242	0.75	0.030	8.2	316SS	CG	P
6.70	0.264	50140S	20.00	0.787	5.20	0.205	1.60	9.140	8.32	0.328	13.32	2.994	7.95	0.313	0.75	0.030	10.6	316SS	CG	P
6.70	0.264	50141S	25.00	0.984	5.20	0.205	1.30	7.420	10.24	0.403	13.32	2.994	9.68	0.381	0.75	0.030	12.9	316SS	CG	P
6.70	0.264	50142S	35.00	1.378	5.20	0.205	0.88	5.020	15.13	0.596	13.32	2.994	13.20	0.520	0.75	0.030	17.6	316SS	CG	P
6.70	0.264	50143S	45.00	1.772	5.20	0.205	0.71	4.050	18.76	0.738	13.32	2.994	15.98	0.629	0.75	0.030	21.3	316SS	CG	P
6.70	0.264	50144S	55.00	2.165	5.20	0.205	0.55	3.140	24.21	0.953	13.32	2.994	20.25	0.797	0.75	0.030	27.0	316SS	CG	P
6.80	0.268	65275S	13.50	0.531	5.80	0.228	0.62	3.515	6.43	0.253	3.95	0.889	2.74	0.108	0.50	0.020	5.5	316SS	CG	P
6.80	0.268	65276S	20.00	0.787	5.80	0.228	0.39	2.237	10.11	0.398	3.96	0.890	3.76	0.148	0.50	0.020	7.5	316SS	CG	P
6.80	0.268	65277S	30.00	1.181	5.80	0.228	0.25	1.447	15.65	0.616	3.96	0.891	5.26	0.207	0.50	0.020	10.5	316SS	CG	P
6.80	0.268	65278S	44.00	1.732	5.80	0.228	0.17	0.984	22.99	0.905	3.96	0.891	7.24	0.285	0.50	0.020	14.5	316SS	CG	P
6.80	0.268	65279S	65.00	2.559	5.80	0.228	0.12	0.665	34.04	1.340	3.96	0.891	10.26	0.404	0.50	0.020	20.5	316SS	CG	P
6.93	0.273	50145S	12.00	0.472	5.67	0.223	1.81	10.340	4.27	0.168	7.72	1.736	3.15	0.124	0.63	0.025	5.0	316SS	CG	P
6.93	0.273	50146S	39.00	1.353	5.67	0.223	0.45	2.570	17.16	0.676	7.72	1.736	8.82	0.347	0.63	0.025	14.0	316SS	CG	P
6.93	0.273	65365S	11.50	0.453	5.67	0.223	1.55	8.858	4.98	0.196	7.72	1.736	3.45	0.136	0.63	0.025	5.5	316SS	CG	P
6.93	0.273	65366S	17.00	0.669	5.67	0.223	0.99	5.637	7.82	0.308	7.72	1.736	4.72	0.186	0.63	0.025	7.5	316SS	CG	P
6.93	0.273	65367S	25.50	1.004	5.67	0.223	0.64	3.648	12.09	0.476	7.72	1.736	6.60	0.260	0.63	0.025	10.5	316SS	CG	P
6.93	0.273	65368S	36.50	1.437	5.67	0.223	0.43	2.480	17.78	0.700	7.72	1.736	9.14	0.360	0.63	0.025	14.5	316SS	CG	P
6.93	0.273	65369S	54.00	2.126	5.67	0.223	0.29	1.676	26.29	1.035	7.71	1.735	12.90	0.508	0.63	0.025	20.5	316SS	CG	P
7.10	0.280	50147S	9.30	0.366	5.50	0.217	4.71	26.890	3.24	0.127	15.25	3.427	4.00	0.157	0.80	0.031	5.0	316SS	CG	P
7.10	0.280	50148S	11.00	0.433	5.50	0.217	4.30	24.550	3.55	0.140	15.24	3.427	4.40	0.173	0.80	0.031	5.5	316SS	CG	P
7.10	0.280	50149S	14.00	0.551	5.50	0.217	2.83	16.160	5.39	0.212	15.25	3.427	5.60	0.220	0.80	0.031	7.0	316SS	CG	P
7.10	0.280	50150S	16.00	0.630	5.50	0.217	2.70	15.420	5.65	0.222	15.24	3.427	6.00	0.236	0.80	0.031	7.5	316SS	CG	P
7.10	0.280	50151S	21.00	0.827	5.50	0.217	1.77	10.110	8.61	0.339	15.25	3.427	8.00	0.315	0.80	0.031	10.0	316SS	CG	P
7.10	0.280	50152S	23.00	0.906	5.50	0.217	1.80	10.280	8.47	0.333	15.24	3.427	8.40	0.331	0.80	0.031	10.5	316SS	CG	P
7.10	0.280	50153S	30.00	1.181	5.50	0.217	1.18	6.740	12.92	0.509	15.24	3.427	11.20	0.441	0.80	0.031	14.0	316SS	CG	P
7.10	0.280	50154S	33.00	1.299	5.50	0.217	1.20	6.850	12.70	0.500	15.25	3.427	11.60	0.457	0.80	0.031	14.5	316SS	CG	P
7.10	0.280	50155S	44.00	1.732	5.50	0.217	0.78	4.450	19.55	0.769	15.25	3.427	16.00	0.630	0.80	0.031	20.0	316SS	CG	P
7.10	0.280	50156S	48.00	1.890	5.50	0.217	0.81	4.630	18.82	0.741	15.25	3.427	16.40	0.646	0.80	0.031	20.5	316SS	CG	P
7.10	0.280	65450S	10.50	0.413	5.50	0.216	4.03	23.033	3.76	0.148	15.15	3.409	4.39	0.173	0.80	0.032	5.5	316SS	CG	P
7.10	0.280	65451S	15.50	0.610	5.50	0.216	2.57	14.657	5.92	0.233	15.18	3.415	5.99	0.236	0.80	0.032	7.5	316SS	CG	P
7.10	0.280	65452S	23.00	0.906	5.50	0.216	1.66	9.484	9.17	0.361	15.22	3.424	8.41	0.331	0.80	0.032	10.5	316SS	CG	P
7.10	0.280	65453S	33.00	1.299	5.50	0.216	1.13	6.449	13.46	0.530	15.19	3.418	11.61	0.457	0.80	0.032	14.5	316SS	CG	P
7.10	0.280	65454S	48.00	1.890	5.50	0.216	0.76	4.358	19.94	0.785	15.20	3.421	16.41	0.646	0.80	0.032	20.5	316SS	CG	P
7.20	0.283	50157S	20.00	0.787	5.20	0.205	4.40	25.120	6.57	0.258	28.89	6.494	10.80	0.425	1.00	0.039	10.8	316SS	CG	P
7.20	0.283	50158S	25.00	0.984	5.20	0.205	3.40	19.410	8.50	0.334	28.89	6.494	13.20	0.520	1.00	0.039	13.2	316SS	CG	P
7.20	0.283	50159S	35.00	1.378	5.20	0.205	2.40	13.700	12.04	0.474	28.89	6.494	18.00	0.709	1.00	0.039	18.0	316SS	CG	P
7.20	0.283	50160S	55.00	2.165	5.20	0.205	1.50	8.570	19.26	0.758	28.89	6.494	27.80	1.094	1.00	0.039	27.8	316SS	CG	P
7.20	0.283	50161S	65.00	2.559	5.20	0.205	1.30	7.420	22.22	0.875	28.89	6.494	32.50	1.280	1.00	0.039	32.5	316SS	CG	P
7.25	0.285	50162S	10.00	0.394	6.25	0.246	0.81	4.630	4.61	0.181	3.73	0.839	2.15	0.085	0.50	0.020	4.3	316SS	CG	P
7.25	0.285	50163S	15.00	0.591	6.25	0.246	0.50	2.860	7.46	0.294	3.73	0.839	2.85	0.112	0.50	0.020	5.7	316SS	CG	P
7.25	0.285	50164S	20.00	0.787	6.25	0.246	0.35	2.000	10.66	0.420	3.73	0.839	3.65	0.144	0.50	0.020	7.3	316SS	CG	P
7.25	0.285	50165S	25.00	0.984	6.25	0.246	0.28	1.600	13.32	0.524	3.73	0.839	4.35	0.171	0.50	0.020	8.7	316SS	CG	P
7.25	0.285	50166S	30.00	1.181	6.25	0.246	0.23	1.310	16.22	0.638	3.73	0.839	5.10	0.201	0.50	0.020	10.2	316SS	CG	P
7.25	0.285	50167S	35.00	1.378	6.25	0.246	0.19	1.080	19.63	0.773	3.73	0.839	5.85	0.230	0.50	0.020	11.7	316SS	CG	P
7.25	0.285	50168S	45.00	1.772	6.25	0.246	0.15	0.860	24.87	0.979	3.73	0.839	7.30	0.287	0.50	0.020	14.6	316SS	CG	P
7.30	0.287	50169S	9.00	0.354	5.30	0.209	11.50	65.670	2.48	0.098	28.53	6.414	5.00	0.197	1.00	0.039	5.0	316SS	CG	P
7.30	0.287	50170S	13.00	0.512	5.30	0.209	6.90	39.400	4.13	0.163	28.53	6.413	7.00	0.276	1.00	0.039	7.0	316SS	CG	P
7.30	0.287	50171S	28.00	1.102	5.30	0.209	2.87	16.390	9.94	0.391	28.53									




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils Mat'l	Ends E F nsh										
7.49	0.295	65304S	30.00	1.181	6.37	0.251	0.36	2,033	14.22	0.560	5.06	1.138	4.72	0.186	0.56	0.022	8.7	316 SS	CG	P
7.49	0.295	65305S	35.00	1.378	6.37	0.251	0.30	1,733	16.69	0.657	5.06	1.139	5.36	0.211	0.56	0.022	9.8	316 SS	CG	P
7.49	0.295	65306S	40.00	1.575	6.37	0.251	0.26	1,508	19.18	0.755	5.06	1.139	5.99	0.236	0.56	0.022	11.0	316 SS	CG	P
7.49	0.295	65307S	45.00	1.772	6.37	0.251	0.23	1,333	21.69	0.854	5.06	1.138	6.60	0.260	0.56	0.022	12.2	316 SS	CG	P
7.49	0.295	65308S	50.00	1.969	6.37	0.251	0.21	1,200	24.08	0.948	5.06	1.138	7.24	0.285	0.56	0.022	13.3	316 SS	CG	P
7.49	0.295	65309S	55.00	2.165	6.37	0.251	0.19	1,091	26.49	1.043	5.06	1.138	7.87	0.310	0.56	0.022	14.4	316 SS	CG	P
7.49	0.295	65310S	60.00	2.362	6.37	0.251	0.18	1,000	28.91	1.138	5.06	1.138	8.51	0.335	0.56	0.022	15.6	316 SS	CG	P
7.49	0.295	65311S	65.00	2.559	6.37	0.251	0.16	9,916	31.55	1.242	5.06	1.138	9.12	0.359	0.56	0.022	16.8	316 SS	CG	P
7.49	0.295	65375S	9.50	0.374	6.17	0.243	2.27	12,970	3.63	0.143	8.24	1.855	2.67	0.105	0.66	0.026	4.1	316 SS	CG	P
7.49	0.295	65376S	11.00	0.433	6.17	0.243	1.92	10,971	4.29	0.169	8.24	1.854	2.92	0.115	0.66	0.026	4.5	316 SS	CG	P
7.49	0.295	65377S	12.50	0.492	6.17	0.243	1.66	9,496	4.95	0.195	8.23	1.852	3.18	0.125	0.66	0.026	4.9	316 SS	CG	P
7.49	0.295	65378S	14.00	0.551	6.17	0.243	1.47	8,380	5.61	0.221	8.23	1.852	3.43	0.135	0.66	0.026	5.3	316 SS	CG	P
7.49	0.295	65379S	15.50	0.610	6.17	0.243	1.31	7,489	6.27	0.247	8.22	1.850	3.66	0.144	0.66	0.026	5.7	316 SS	CG	P
7.49	0.295	65380S	17.00	0.669	6.17	0.243	1.19	6,772	6.93	0.273	8.22	1.849	3.91	0.154	0.66	0.026	6.1	316 SS	CG	P
7.49	0.295	65381S	19.00	0.748	6.17	0.243	1.05	6,014	7.82	0.308	8.23	1.852	4.24	0.167	0.66	0.026	6.6	316 SS	CG	P
7.49	0.295	65382S	21.00	0.827	6.17	0.243	0.95	5,398	8.71	0.343	8.23	1.852	4.60	0.181	0.66	0.026	7.1	316 SS	CG	P
7.49	0.295	65383S	23.00	0.906	6.17	0.243	0.86	4,906	9.58	0.377	8.22	1.850	4.93	0.194	0.66	0.026	7.6	316 SS	CG	P
7.49	0.295	65384S	25.00	0.984	6.17	0.243	0.79	4,490	10.47	0.412	8.22	1.850	5.26	0.207	0.66	0.026	8.1	316 SS	CG	P
7.49	0.295	65385S	27.50	1.083	6.17	0.243	0.71	4,057	11.58	0.456	8.22	1.850	5.66	0.223	0.66	0.026	8.8	316 SS	CG	P
7.49	0.295	65386S	30.00	1.181	6.17	0.243	0.65	3,707	12.68	0.499	8.22	1.850	6.10	0.240	0.66	0.026	9.4	316 SS	CG	P
7.49	0.295	65387S	35.00	1.378	6.17	0.243	0.55	3,157	14.88	0.586	8.22	1.850	6.93	0.273	0.66	0.026	10.7	316 SS	CG	P
7.49	0.295	65388S	40.00	1.575	6.17	0.243	0.48	2,749	17.09	0.673	8.22	1.850	7.75	0.305	0.66	0.026	12.7	316 SS	CG	P
7.49	0.295	65389S	45.00	1.772	6.17	0.243	0.43	2,432	19.33	0.761	8.23	1.851	8.59	0.338	0.66	0.026	13.3	316 SS	CG	P
7.49	0.295	65390S	50.00	1.969	6.17	0.243	0.38	2,182	21.54	0.848	8.22	1.850	9.42	0.371	0.66	0.026	14.6	316 SS	CG	P
7.49	0.295	65391S	55.00	2.165	6.17	0.243	0.35	1,983	23.70	0.933	8.22	1.850	10.26	0.404	0.66	0.026	15.8	316 SS	CG	P
7.49	0.295	65392S	60.00	2.362	6.17	0.243	0.32	1,816	25.88	1.019	8.23	1.851	11.10	0.437	0.66	0.026	17.1	316 SS	CG	P
7.49	0.295	65393S	65.00	2.559	6.17	0.243	0.29	1,666	28.19	1.110	8.22	1.849	11.94	0.470	0.66	0.026	18.5	316 SS	CG	P
7.49	0.295	65455S	9.50	0.374	5.87	0.231	4.70	26,856	3.20	0.126	15.04	3,384	3.61	0.142	0.81	0.032	4.5	316 SS	CG	P
7.49	0.295	65456S	11.00	0.433	5.87	0.231	3.95	22,574	3.81	0.150	15.05	3,386	3.96	0.156	0.81	0.032	5.0	316 SS	CG	P
7.49	0.295	65457S	12.50	0.492	5.87	0.231	3.41	19,467	4.42	0.174	15.05	3,387	4.34	0.171	0.81	0.032	5.5	316 SS	CG	P
7.49	0.295	65458S	14.00	0.551	5.87	0.231	3.00	17,110	5.03	0.198	15.06	3,388	4.72	0.186	0.81	0.032	5.9	316 SS	CG	P
7.49	0.295	65459S	15.50	0.610	5.87	0.231	2.67	15,261	5.64	0.222	15.06	3,388	5.11	0.201	0.81	0.032	6.4	316 SS	CG	P
7.49	0.295	65460S	17.00	0.669	5.87	0.231	2.41	13,778	6.22	0.245	15.00	3,376	5.49	0.216	0.81	0.032	6.9	316 SS	CG	P
7.49	0.295	65461S	19.00	0.748	5.87	0.231	2.14	12,195	7.04	0.277	15.01	3,378	5.99	0.236	0.81	0.032	7.5	316 SS	CG	P
7.49	0.295	65462S	21.00	0.827	5.87	0.231	1.92	10,937	7.85	0.309	15.02	3,380	6.50	0.256	0.81	0.032	8.2	316 SS	CG	P
7.49	0.295	65463S	23.00	0.906	5.87	0.231	1.74	9,913	8.66	0.341	15.02	3,380	7.01	0.276	0.81	0.032	8.8	316 SS	CG	P
7.49	0.295	65464S	25.00	0.984	5.87	0.231	1.59	9,071	9.47	0.373	15.04	3,383	7.52	0.296	0.81	0.032	9.4	316 SS	CG	P
7.49	0.295	65465S	27.50	1.083	5.87	0.231	1.43	8,188	10.49	0.413	15.03	3,382	8.13	0.320	0.81	0.032	10.2	316 SS	CG	P
7.49	0.295	65466S	30.00	1.181	5.87	0.231	1.31	7,472	11.48	0.452	15.01	3,377	8.76	0.345	0.81	0.032	11.0	316 SS	CG	P
7.49	0.295	65467S	35.00	1.378	5.87	0.231	1.11	6,356	13.51	0.532	15.03	3,381	10.03	0.395	0.81	0.032	12.6	316 SS	CG	P
7.49	0.295	65468S	40.00	1.575	5.87	0.231	0.97	5,523	15.55	0.612	15.02	3,380	11.30	0.445	0.81	0.032	14.2	316 SS	CG	P
7.49	0.295	65469S	45.00	1.772	5.87	0.231	0.86	4,890	17.55	0.691	15.02	3,379	12.55	0.494	0.81	0.032	15.8	316 SS	CG	P
7.49	0.295	65470S	50.00	1.969	5.87	0.231	0.77	4,382	19.61	0.772	15.04	3,383	13.82	0.544	0.81	0.032	17.4	316 SS	CG	P
7.49	0.295	65471S	55.00	2.165	5.87	0.231	0.70	3,973	21.62	0.851	15.03	3,381	15.09	0.594	0.81	0.032	18.9	316 SS	CG	P
7.49	0.295	65472S	60.00	2.362	5.87	0.231	0.64	3,632	23.65	0.931	15.03	3,381	16.36	0.644	0.81	0.032	20.5	316 SS	CG	P
7.49	0.295	65473S	65.00	2.559	5.87	0.231	0.59	3,349	25.65	1.010	15.03	3,382	17.60	0.693	0.81	0.032	22.1	316 SS	CG	P
7.49	0.295	65498S	9.50	0.374	5.55	0.219	9.70	55,433	2.62	0.103	25.38	5,710	4.60	0.181	0.97	0.038	4.8	316 SS	CG	P
7.49	0.295	65499S	11.00	0.433	5.55	0.219	8.09	46,249	3.15	0.124	25.49	5,735	5.13	0.202	0.97	0.038	5.3	316 SS	CG	P
7.49	0.295	65500S	12.50	0.492	5.55	0.219	6.94	39,677	3.68	0.145	25.57	5,753	5.66	0.223	0.97	0.038	5.9	316 SS	CG	P
7.49	0.295	65501S	14.00	0.551	5.55	0.219	6.09	34,818	4.19	0.165	25.53	5,745	6.20	0.244	0.97	0.038	6.4	316 SS	CG	P
7.49	0.295	65502S	15.50	0.610	5.55	0.219	5.05	28,822	5.06	0.199	25.49	5,736	7.09	0.279	0.97	0.038	7.0	316 SS	CG	P
7.49	0.295	65503S	17.00	0.669	5.55	0.219	4.88	27,867	5.23	0.206	25.52	5,741	7.24	0.285	0.97	0.038	7.5	316 SS	CG	P
7.49	0.295	65504S	19.00	0.748	5.55	0.219	4.02	22,924	6.35	0.250	25.47	5,731	8.41	0.331	0.97	0.038	8.2	316 SS	CG	P
7.49	0.295	65505S	21.00	0.827	5.55	0.219	3.60	20,525	7.09	0.279	25.45	5,								




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length		I.D.		Rate		Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length		Wire Dia.		Total Coils	Ends Mat'l	F nsh		
		mm	Inches	mm	Inches	N/mm	Lbs./In.	mm	Inches	mm	Inches	mm	Inches					
7.55	0.297	65646S	35.50	1.398	5.01	0.197	6.74	38.483	7.85	0.309	52.85	11.891	19.66	0.774	1.27	0.050	15.5	316SS CG P
7.55	0.297	65647S	51.50	2.028	5.01	0.197	4.55	25.973	11.66	0.459	52.99	11.922	27.89	1.098	1.27	0.050	22.0	316SS CG P
7.75	0.305	50190S	10.00	0.394	6.25	0.246	2.90	16.560	4.00	0.158	11.61	2.610	3.68	0.145	0.75	0.030	4.9	316SS CG P
7.75	0.305	50191S	15.00	0.591	6.25	0.246	1.66	9.480	7.00	0.275	11.61	2.610	5.10	0.201	0.75	0.030	6.8	316SS CG P
7.75	0.305	50192S	20.00	0.787	6.25	0.246	1.30	7.420	8.93	0.352	11.61	2.610	6.45	0.254	0.75	0.030	8.6	316SS CG P
7.75	0.305	50193S	25.00	0.984	6.25	0.246	0.99	5.650	11.73	0.462	11.61	2.610	7.88	0.310	0.75	0.030	10.5	316SS CG P
7.75	0.305	50194S	30.00	1.181	6.25	0.246	0.82	4.680	14.16	0.557	11.61	2.610	9.23	0.363	0.75	0.030	12.3	316SS CG P
7.75	0.305	50195S	40.00	1.575	6.25	0.246	0.60	3.430	19.35	0.762	11.61	2.610	12.00	0.472	0.75	0.030	16.0	316SS CG P
8.25	0.325	50196S	10.00	0.394	7.25	0.285	0.72	4.110	4.57	0.180	3.29	0.740	1.85	0.073	0.50	0.020	3.7	316SS CG P
8.25	0.325	50197S	10.00	0.394	6.25	0.246	7.70	43.970	3.31	0.130	25.50	5.732	5.10	0.201	1.00	0.039	5.1	316SS CG P
8.25	0.325	50198S	15.00	0.591	7.25	0.285	0.44	2.510	7.48	0.294	3.29	0.740	2.40	0.094	0.50	0.020	4.8	316SS CG P
8.25	0.325	50199S	15.00	0.591	6.25	0.246	4.70	26.840	5.42	0.214	25.49	5.731	7.10	0.280	1.00	0.039	7.1	316SS CG P
8.25	0.325	50200S	20.00	0.787	7.25	0.285	0.31	1.770	10.62	0.418	3.29	0.740	2.95	0.116	0.50	0.020	5.9	316SS CG P
8.25	0.325	50201S	20.00	0.787	6.25	0.246	3.30	18.840	7.73	0.304	25.50	5.732	9.20	0.362	1.00	0.039	9.2	316SS CG P
8.25	0.325	50202S	25.00	0.984	7.25	0.285	0.25	1.430	13.16	0.518	3.29	0.740	3.50	0.138	0.50	0.020	7.0	316SS CG P
8.25	0.325	50203S	25.00	0.984	6.25	0.246	2.60	14.850	9.81	0.386	25.50	5.732	11.20	0.441	1.00	0.039	11.2	316SS CG P
8.25	0.325	50204S	30.00	1.181	7.25	0.285	0.20	1.140	16.46	0.648	3.29	0.740	4.10	0.161	0.50	0.020	8.2	316SS CG P
8.25	0.325	50205S	30.00	1.181	6.25	0.246	2.10	11.990	12.14	0.478	25.49	5.731	13.20	0.520	1.00	0.039	13.2	316SS CG P
8.25	0.325	50206S	40.00	1.575	7.25	0.285	0.14	0.800	23.51	0.925	3.29	0.740	5.25	0.207	0.50	0.020	10.5	316SS CG P
8.25	0.325	50207S	40.00	1.575	6.25	0.246	1.60	9.140	15.93	0.627	25.49	5.731	17.30	0.681	1.00	0.039	17.3	316SS CG P
8.25	0.325	50208S	50.00	1.969	6.25	0.246	1.20	6.850	21.25	0.836	25.50	5.732	21.30	0.839	1.00	0.039	21.3	316SS CG P
8.25	0.325	50209S	60.00	2.362	6.25	0.246	1.00	5.710	25.50	1.004	25.50	5.732	25.30	0.996	1.00	0.039	25.3	316SS CG P
8.25	0.325	50210S	70.00	2.756	6.25	0.246	0.87	4.970	29.31	1.154	25.50	5.732	29.50	1.161	1.00	0.039	29.5	316SS CG P
8.45	0.333	50211S	10.00	0.394	7.25	0.285	1.30	7.420	4.25	0.167	5.53	1.242	2.34	0.092	0.60	0.024	3.9	316SS CG P
8.45	0.333	50212S	15.00	0.591	7.25	0.285	0.76	4.340	7.27	0.286	5.53	1.242	3.12	0.123	0.60	0.024	5.2	316SS CG P
8.45	0.333	50213S	20.00	0.787	7.25	0.285	0.54	3.080	10.23	0.403	5.53	1.242	3.90	0.154	0.60	0.024	6.5	316SS CG P
8.45	0.333	50214S	25.00	0.984	7.25	0.285	0.42	2.400	13.16	0.518	5.53	1.242	4.68	0.184	0.60	0.024	7.8	316SS CG P
8.45	0.333	50215S	35.00	1.378	7.25	0.285	0.29	1.660	19.05	0.750	5.53	1.242	6.30	0.248	0.60	0.024	10.5	316SS CG P
8.45	0.333	50216S	45.00	1.772	7.25	0.285	0.22	1.260	25.11	0.989	5.53	1.242	7.80	0.307	0.60	0.024	13.0	316SS CG P
8.45	0.333	50217S	55.00	2.165	7.25	0.285	0.18	1.030	30.69	1.208	5.53	1.242	9.36	0.369	0.60	0.024	15.6	316SS CG P
8.63	0.340	50218S	17.00	0.669	7.37	0.290	0.88	5.020	7.11	0.280	6.26	1.406	3.15	0.124	0.63	0.025	5.0	316SS CG P
8.63	0.340	65370S	16.00	0.630	7.37	0.290	0.76	4.326	8.26	0.325	6.25	1.406	3.45	0.136	0.63	0.025	5.5	316SS CG P
8.63	0.340	65371S	24.50	0.965	7.37	0.290	0.48	2.753	12.98	0.511	6.25	1.407	4.72	0.186	0.63	0.025	7.5	316SS CG P
8.63	0.340	65372S	37.00	1.457	7.37	0.290	0.31	1.781	20.04	0.789	6.24	1.405	6.60	0.260	0.63	0.025	10.5	316SS CG P
8.63	0.340	65373S	55.00	2.165	7.37	0.290	0.21	1.211	29.49	1.161	6.25	1.406	9.14	0.360	0.63	0.025	14.5	316SS CG P
8.63	0.340	65374S	80.50	3.169	7.37	0.290	0.14	0.818	43.66	1.719	6.25	1.406	12.90	0.508	0.63	0.025	20.5	316SS CG P
8.65	0.341	50219S	35.00	1.378	6.25	0.246	3.25	18.560	12.51	0.493	40.67	9.143	18.36	0.723	1.20	0.047	15.3	316SS CG P
8.65	0.341	50220S	45.00	1.772	6.25	0.246	2.47	14.100	16.47	0.648	40.67	9.143	23.40	0.921	1.20	0.047	19.5	316SS CG P
8.75	0.344	50221S	10.00	0.394	7.25	0.285	2.50	14.280	4.14	0.163	10.35	2.326	3.23	0.127	0.75	0.030	4.3	316SS CG P
8.75	0.344	50222S	15.00	0.591	7.25	0.285	1.50	8.570	6.90	0.272	10.35	2.326	4.28	0.169	0.75	0.030	5.7	316SS CG P
8.75	0.344	50223S	20.00	0.787	7.25	0.285	1.10	6.280	9.41	0.370	10.35	2.326	5.48	0.216	0.75	0.030	7.3	316SS CG P
8.75	0.344	50224S	25.00	0.984	7.25	0.285	0.84	4.800	12.32	0.485	10.35	2.326	6.53	0.257	0.75	0.030	8.7	316SS CG P
8.75	0.344	50225S	35.00	1.378	7.25	0.285	0.58	3.310	17.84	0.702	10.35	2.326	8.78	0.346	0.75	0.030	11.7	316SS CG P
8.75	0.344	50226S	45.00	1.772	7.25	0.285	0.45	2.570	22.99	0.905	10.35	2.326	10.95	0.431	0.75	0.030	14.6	316SS CG P
8.75	0.344	50227S	55.00	2.165	7.25	0.285	0.36	2.060	28.74	1.131	10.35	2.326	13.20	0.520	0.75	0.030	17.6	316SS CG P
8.75	0.344	50228S	65.00	2.559	7.25	0.285	0.30	1.710	34.48	1.358	10.35	2.326	15.45	0.608	0.75	0.030	20.6	316SS CG P
8.80	0.346	50229S	13.00	0.512	7.20	0.283	2.30	13.130	5.41	0.213	12.45	2.799	4.00	0.157	0.80	0.031	5.0	316SS CG P
8.80	0.346	50230S	15.00	0.591	7.20	0.283	2.10	11.990	5.93	0.233	12.45	2.799	4.40	0.173	0.80	0.031	5.5	316SS CG P
8.80	0.346	50231S	19.00	0.748	7.20	0.283	1.38	7.880	9.02	0.355	12.45	2.799	5.60	0.220	0.80	0.031	7.0	316SS CG P
8.80	0.346	50232S	22.00	0.866	7.20	0.283	1.30	7.420	9.58	0.377	12.45	2.799	6.00	0.236	0.80	0.031	7.5	316SS CG P
8.80	0.346	50233S	29.00	1.142	7.20	0.283	0.86	4.910	14.48	0.570	12.45	2.799	8.00	0.315	0.80	0.031	10.0	316SS CG P
8.80	0.346	50234S	32.00	1.260	7.20	0.283	0.86	4.910	14.48	0.570	12.45	2.799	8.40	0.331	0.80	0.031	10.5	316SS CG P
8.80	0.346	50235S	42.00	1.654	7.20	0.283	0.58	3.310	21.47	0.845	12.45	2.799	11.20	0.441	0.80	0.031	14.0	316SS CG P
8.80	0.346	50236S	47.00	1.850	7.20	0.283	0.58	3.310	21.47	0.845	12.45	2.799	11.60	0.457	0.80	0.031	14.5	316SS CG P
8.80	0.346	50237S	61.00	2.402	7.20	0.283	0.38	2.170	32.76	1.290	12.45							




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Mat'l	Ends	Finish								
8.99	0.354	65518S	12.50	0.492	7.05	0.278	5.33	30.480	4.04	0.159	21.54	4.846	4.55	0.179	0.97	0.038	4.7	316 SS	CG	P
8.99	0.354	65519S	14.00	0.551	7.05	0.278	4.68	26.732	4.60	0.181	21.50	4.838	4.90	0.193	0.97	0.038	5.1	316 SS	CG	P
8.99	0.354	65520S	15.50	0.610	7.05	0.278	4.14	23.668	5.21	0.205	21.56	4.852	5.31	0.209	0.97	0.038	5.5	316 SS	CG	P
8.99	0.354	65521S	17.00	0.669	7.05	0.278	3.34	19.042	6.45	0.254	21.50	4.837	6.12	0.241	0.97	0.038	6.1	316 SS	CG	P
8.99	0.354	65522S	19.00	0.748	7.05	0.278	2.95	16.818	7.32	0.288	21.53	4.844	6.68	0.263	0.97	0.038	6.6	316 SS	CG	P
8.99	0.354	65523S	21.00	0.827	7.05	0.278	2.97	16.961	7.24	0.285	21.48	4.834	6.63	0.261	0.97	0.038	6.9	316 SS	CG	P
8.99	0.354	65524S	23.00	0.906	7.05	0.278	2.67	15.268	8.05	0.317	21.51	4.840	7.16	0.282	0.97	0.038	7.4	316 SS	CG	P
8.99	0.354	65525S	25.00	0.984	7.05	0.278	2.17	12.400	9.91	0.390	21.49	4.836	8.36	0.329	0.97	0.038	7.9	316 SS	CG	P
8.99	0.354	65526S	27.50	1.083	7.05	0.278	1.96	11.200	10.97	0.432	21.50	4.838	9.04	0.356	0.97	0.038	8.6	316 SS	CG	P
8.99	0.354	65527S	30.00	1.181	7.05	0.278	1.79	10.200	12.07	0.475	21.53	4.845	9.75	0.384	0.97	0.038	9.2	316 SS	CG	P
8.99	0.354	65528S	35.00	1.378	7.05	0.278	1.71	9.775	12.57	0.495	21.51	4.839	10.08	0.397	0.97	0.038	10.5	316 SS	CG	P
8.99	0.354	65529S	40.00	1.575	7.05	0.278	1.42	8.090	15.22	0.599	21.54	4.846	11.79	0.464	0.97	0.038	12.2	316 SS	CG	P
8.99	0.354	65530S	45.00	1.772	7.05	0.278	1.32	7.523	16.36	0.644	21.53	4.845	12.52	0.493	0.97	0.038	13.0	316 SS	CG	P
8.99	0.354	65531S	50.00	1.969	7.05	0.278	1.05	6.000	20.50	0.807	21.52	4.842	15.22	0.599	0.97	0.038	14.3	316 SS	CG	P
8.99	0.354	65532S	55.00	2.165	7.05	0.278	0.95	5.415	22.71	0.894	21.52	4.841	16.66	0.656	0.97	0.038	16.2	316 SS	CG	P
8.99	0.354	65533S	60.00	2.362	7.05	0.278	0.86	4.900	25.10	0.988	21.52	4.841	18.21	0.717	0.97	0.038	17.0	316 SS	CG	P
8.99	0.354	65534S	65.00	2.559	7.05	0.278	0.81	4.600	26.75	1.053	21.53	4.844	19.25	0.758	0.97	0.038	18.0	316 SS	CG	P
8.99	0.354	65594S	11.00	0.433	6.81	0.268	9.88	56.400	3.00	0.118	29.58	6.655	5.06	0.199	1.09	0.043	4.5	316 SS	CG	P
8.99	0.354	65595S	12.50	0.492	6.81	0.268	8.44	48.200	3.51	0.138	29.56	6.652	5.54	0.218	1.09	0.043	5.0	316 SS	CG	P
8.99	0.354	65596S	14.00	0.551	6.81	0.268	7.37	42.100	4.01	0.158	29.56	6.652	6.02	0.237	1.09	0.043	5.4	316 SS	CG	P
8.99	0.354	65597S	15.50	0.610	6.81	0.268	6.53	37.300	4.55	0.179	29.68	6.677	6.50	0.256	1.09	0.043	5.8	316 SS	CG	P
8.99	0.354	65598S	17.00	0.669	6.81	0.268	5.87	33.500	5.06	0.199	29.63	6.667	6.99	0.275	1.09	0.043	6.2	316 SS	CG	P
8.99	0.354	65599S	19.00	0.748	6.81	0.268	5.18	29.600	5.72	0.225	29.60	6.660	7.65	0.301	1.09	0.043	6.8	316 SS	CG	P
8.99	0.354	65600S	21.00	0.827	6.81	0.268	4.62	26.400	6.43	0.253	29.68	6.679	8.28	0.326	1.09	0.043	7.4	316 SS	CG	P
8.99	0.354	65601S	23.00	0.906	6.81	0.268	4.19	23.900	7.09	0.279	29.64	6.668	8.94	0.352	1.09	0.043	7.9	316 SS	CG	P
8.99	0.354	65602S	25.00	0.984	6.81	0.268	3.82	21.800	7.77	0.306	29.65	6.671	9.58	0.377	1.09	0.043	8.5	316 SS	CG	P
8.99	0.354	65603S	27.50	1.083	6.81	0.268	3.43	19.600	8.64	0.340	29.62	6.664	10.39	0.409	1.09	0.043	9.3	316 SS	CG	P
8.99	0.354	65604S	30.00	1.181	6.81	0.268	3.14	17.900	9.47	0.373	29.68	6.677	11.20	0.441	1.09	0.043	9.9	316 SS	CG	P
8.99	0.354	65605S	35.00	1.378	6.81	0.268	2.65	15.100	11.23	0.442	29.66	6.674	12.80	0.504	1.09	0.043	11.4	316 SS	CG	P
8.99	0.354	65606S	40.00	1.575	6.81	0.268	2.29	13.100	12.93	0.509	29.64	6.668	14.43	0.568	1.09	0.043	12.9	316 SS	CG	P
8.99	0.354	65607S	45.00	1.772	6.81	0.268	2.03	11.600	14.61	0.575	29.64	6.670	16.05	0.632	1.09	0.043	14.3	316 SS	CG	P
8.99	0.354	65608S	50.00	1.969	6.81	0.268	1.82	10.400	16.28	0.641	29.63	6.666	17.68	0.696	1.09	0.043	15.7	316 SS	CG	P
8.99	0.354	65609S	55.00	2.165	6.81	0.268	1.65	9.405	18.01	0.709	29.64	6.668	19.28	0.759	1.09	0.043	17.6	316 SS	CG	P
8.99	0.354	65610S	60.00	2.362	6.81	0.268	1.51	8.600	19.69	0.775	29.62	6.665	20.90	0.823	1.09	0.043	18.5	316 SS	CG	P
8.99	0.354	65611S	65.00	2.559	6.81	0.268	1.38	7.900	21.44	0.844	29.64	6.668	22.53	0.887	1.09	0.043	20.0	316 SS	CG	P
9.00	0.354	50239S	12.00	0.472	7.00	0.276	5.62	32.090	4.18	0.165	23.51	5.285	5.00	0.197	1.00	0.039	5.0	316 SS	CG	P
9.00	0.354	50240S	17.00	0.669	7.00	0.276	3.37	19.240	6.98	0.275	23.51	5.286	7.00	0.276	1.00	0.039	7.0	316 SS	CG	P
9.00	0.354	50241S	38.00	1.496	7.00	0.276	1.40	7.990	16.79	0.661	23.51	5.286	14.00	0.551	1.00	0.039	14.0	316 SS	CG	P
9.00	0.354	65560S	13.00	0.512	7.00	0.276	4.81	27.462	4.90	0.193	23.56	5.300	5.51	0.217	1.00	0.039	5.5	316 SS	CG	P
9.00	0.354	65561S	19.00	0.748	7.00	0.276	3.06	17.476	7.70	0.303	23.53	5.295	7.49	0.295	1.00	0.039	7.5	316 SS	CG	P
9.00	0.354	65562S	28.50	1.122	7.00	0.276	1.98	11.308	11.89	0.468	23.52	5.292	10.49	0.413	1.00	0.039	10.5	316 SS	CG	P
9.00	0.354	65563S	40.50	1.594	7.00	0.276	1.35	7.689	17.50	0.689	23.55	5.298	14.50	0.571	1.00	0.039	14.5	316 SS	CG	P
9.00	0.354	65564S	59.00	2.323	7.00	0.276	0.91	5.196	25.88	1.019	23.53	5.295	20.50	0.807	1.00	0.039	20.5	316 SS	CG	P
9.25	0.364	50242S	10.00	0.394	7.25	0.285	6.50	37.120	3.53	0.139	22.91	5.151	4.50	0.177	1.00	0.039	4.5	316 SS	CG	P
9.25	0.364	50243S	11.00	0.433	6.75	0.266	13.71	78.290	3.07	0.121	42.15	9.475	6.25	0.246	1.25	0.049	5.0	316 SS	CG	P
9.25	0.364	50244S	15.00	0.591	7.25	0.285	3.90	22.270	5.88	0.231	22.92	5.152	6.20	0.244	1.00	0.039	6.2	316 SS	CG	P
9.25	0.364	50245S	15.00	0.591	6.75	0.266	12.00	68.520	3.51	0.138	42.16	9.477	6.88	0.271	1.25	0.049	5.5	316 SS	CG	P
9.25	0.364	50246S	17.00	0.669	6.75	0.266	8.23	46.990	5.12	0.202	42.15	9.477	8.75	0.344	1.25	0.049	7.0	316 SS	CG	P
9.25	0.364	50247S	20.00	0.787	7.25	0.285	2.60	14.850	8.81	0.347	22.91	5.151	7.90	0.311	1.00	0.039	7.9	316 SS	CG	P
9.25	0.364	50248S	22.00	0.866	6.75	0.266	7.90	45.110	5.34	0.210	42.15	9.477	9.38	0.369	1.25	0.049	7.5	316 SS	CG	P
9.25	0.364	50249S	25.00	0.984	7.25	0.285	2.20	12.560	10.42	0.410	22.92	5.152	9.50	0.374	1.00	0.039	9.5	316 SS	CG	P
9.25	0.364	50250S	25.00	0.984	6.75	0.266	5.14	29.350	8.20	0.323	42.15	9.476	12.50	0.492	1.25	0.049	10.0	316 SS	CG	P
9.25	0.364	50251S	33.00	1.299	6.75	0.266	5.10	29.120	8.27	0.325	42.15	9.476	13.13	0.517	1.25	0.049	10.5	316 SS	CG	P
9.25	0.364	50252S	35.00	1.378	7.25	0														




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Def. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends Mat'l	Ends F nsh									
9.60	0.378	65713S	14.50	0.571	6.40	0.252	31.52	179.978	2.52	0.099	79.19	17.818	8.79	0.346	1.60	0.063	5.5	316SS	CG	P
9.60	0.378	65714S	21.50	0.846	6.40	0.252	20.06	114.531	3.96	0.156	79.41	17.867	11.99	0.472	1.60	0.063	7.5	316SS	CG	P
9.60	0.378	65715S	31.50	1.240	6.40	0.252	12.98	74.108	6.15	0.242	79.71	17.934	16.79	0.661	1.60	0.063	10.5	316SS	CG	P
9.60	0.378	65716S	45.00	1.772	6.40	0.252	8.83	50.394	9.02	0.355	79.51	17.890	23.19	0.913	1.60	0.063	14.5	316SS	CG	P
9.60	0.378	65717S	65.50	2.579	6.40	0.252	5.96	34.050	13.36	0.526	79.60	17.910	32.79	1.291	1.60	0.063	20.5	316SS	CG	P
9.65	0.380	50272S	50.00	1.969	7.25	0.285	1.90	10.850	19.36	0.762	36.79	8.271	22.32	0.879	1.20	0.047	18.6	316SS	CG	P
9.65	0.380	50273S	60.00	2.362	7.25	0.285	1.60	9.140	22.99	0.905	36.79	8.271	26.52	1.044	1.20	0.047	22.1	316SS	CG	P
9.75	0.384	50274S	10.00	0.394	8.25	0.325	2.30	13.130	4.05	0.160	9.32	2.096	2.78	0.109	0.75	0.030	3.7	316SS	CG	P
9.75	0.384	50275S	15.00	0.591	8.25	0.325	1.40	7.990	6.66	0.262	9.33	2.096	3.68	0.145	0.75	0.030	4.9	316SS	CG	P
9.75	0.384	50276S	20.00	0.787	8.25	0.325	0.97	5.540	9.61	0.378	9.33	2.096	4.58	0.180	0.75	0.030	6.1	316SS	CG	P
9.75	0.384	50277S	25.00	0.984	8.25	0.325	0.75	4.280	12.43	0.489	9.33	2.096	5.48	0.216	0.75	0.030	7.3	316SS	CG	P
9.75	0.384	50278S	30.00	1.181	8.25	0.325	0.61	3.480	15.29	0.602	9.33	2.096	6.38	0.251	0.75	0.030	8.5	316SS	CG	P
9.75	0.384	50279S	40.00	1.575	8.25	0.325	0.44	2.510	21.19	0.834	9.33	2.096	8.25	0.325	0.75	0.030	11.0	316SS	CG	P
9.75	0.384	50280S	50.00	1.969	8.25	0.325	0.35	2.000	26.64	1.049	9.33	2.096	10.05	0.396	0.75	0.030	13.4	316SS	CG	P
9.75	0.384	50281S	60.00	2.362	8.25	0.325	0.29	1.660	32.16	1.266	9.33	2.096	11.85	0.467	0.75	0.030	15.8	316SS	CG	P
10.25	0.404	50282S	10.00	0.394	8.25	0.325	5.80	33.120	3.59	0.141	20.80	4.676	4.00	0.157	1.00	0.039	4.0	316SS	CG	P
10.25	0.404	50283S	15.00	0.591	8.25	0.325	3.30	18.840	6.30	0.248	20.80	4.676	5.50	0.217	1.00	0.039	5.5	316SS	CG	P
10.25	0.404	50284S	20.00	0.787	8.25	0.325	2.40	13.700	8.67	0.341	20.80	4.676	6.90	0.272	1.00	0.039	6.9	316SS	CG	P
10.25	0.404	50285S	25.00	0.984	8.25	0.325	1.80	10.280	11.56	0.455	20.80	4.676	8.30	0.327	1.00	0.039	8.3	316SS	CG	P
10.25	0.404	50286S	30.00	1.181	8.25	0.325	1.50	8.570	13.87	0.546	20.80	4.676	9.80	0.386	1.00	0.039	9.8	316SS	CG	P
10.25	0.404	50287S	40.00	1.575	8.25	0.325	1.10	6.280	18.91	0.744	20.80	4.676	12.60	0.496	1.00	0.039	12.6	316SS	CG	P
10.25	0.404	50288S	50.00	1.969	8.25	0.325	0.85	4.850	24.47	0.963	20.80	4.676	15.50	0.610	1.00	0.039	15.5	316SS	CG	P
10.25	0.404	50289S	60.00	2.362	8.25	0.325	0.70	4.000	29.72	1.170	20.80	4.676	18.40	0.724	1.00	0.039	18.4	316SS	CG	P
10.25	0.404	50290S	70.00	2.756	8.25	0.325	0.60	3.430	34.67	1.365	20.80	4.676	21.20	0.835	1.00	0.039	21.2	316SS	CG	P
10.25	0.404	50291S	80.00	3.150	8.25	0.325	0.52	2.970	40.00	1.575	20.80	4.676	24.00	0.945	1.00	0.039	24.0	316SS	CG	P
10.27	0.404	50292S	35.00	1.378	7.23	0.285	6.10	34.830	10.85	0.427	66.17	14.876	20.17	0.794	1.52	0.060	13.3	316SS	CG	P
10.65	0.419	50293S	25.00	0.984	8.25	0.325	3.30	18.840	10.17	0.401	33.57	7.547	10.44	0.411	1.20	0.047	8.7	316SS	CG	P
10.65	0.419	50294S	35.00	1.378	8.25	0.325	2.30	13.130	14.60	0.575	33.57	7.547	14.04	0.553	1.20	0.047	11.7	316SS	CG	P
10.65	0.419	50295S	45.00	1.772	8.25	0.325	1.67	9.540	20.10	0.791	33.57	7.547	17.64	0.694	1.20	0.047	14.7	316SS	CG	P
10.65	0.419	50296S	55.00	2.165	8.25	0.325	1.40	7.990	23.98	0.944	33.57	7.547	21.24	0.836	1.20	0.047	17.7	316SS	CG	P
10.65	0.419	50297S	65.00	2.559	8.25	0.325	1.20	6.850	27.98	1.101	33.57	7.547	24.84	0.978	1.20	0.047	20.7	316SS	CG	P
10.75	0.423	50298S	10.00	0.394	9.25	0.364	2.10	11.990	4.04	0.159	8.49	1.908	2.55	0.100	0.75	0.030	3.4	316SS	CG	P
10.75	0.423	50299S	15.00	0.591	9.25	0.364	1.20	6.850	7.07	0.278	8.49	1.908	3.30	0.130	0.75	0.030	4.4	316SS	CG	P
10.75	0.423	50300S	20.00	0.787	9.25	0.364	0.87	4.970	9.76	0.384	8.49	1.908	3.98	0.157	0.75	0.030	5.3	316SS	CG	P
10.75	0.423	50301S	25.00	0.984	9.25	0.364	0.66	3.770	12.86	0.506	8.49	1.908	4.80	0.189	0.75	0.030	6.4	316SS	CG	P
10.75	0.423	50302S	35.00	1.378	9.25	0.364	0.45	2.570	18.86	0.743	8.49	1.908	6.30	0.248	0.75	0.030	8.4	316SS	CG	P
10.75	0.423	50303S	45.00	1.772	9.25	0.364	0.34	1.940	24.96	0.983	8.49	1.908	7.80	0.307	0.75	0.030	10.4	316SS	CG	P
10.75	0.423	50304S	55.00	2.165	9.25	0.364	0.28	1.600	30.31	1.193	8.49	1.908	9.30	0.366	0.75	0.030	12.4	316SS	CG	P
10.75	0.423	50305S	65.00	2.559	9.25	0.364	0.23	1.310	36.90	1.453	8.49	1.908	10.80	0.425	0.75	0.030	14.4	316SS	CG	P
10.80	0.425	50306S	18.00	0.709	9.20	0.362	1.18	6.740	8.67	0.341	10.23	2.300	4.00	0.157	0.80	0.031	5.0	316SS	CG	P
10.80	0.425	50307S	20.00	0.787	9.20	0.362	1.10	6.280	9.30	0.366	10.23	2.300	4.40	0.173	0.80	0.031	5.5	316SS	CG	P
10.80	0.425	50308S	27.00	1.063	9.20	0.362	0.71	4.050	14.41	0.567	10.23	2.300	5.60	0.220	0.80	0.031	7.0	316SS	CG	P
10.80	0.425	50309S	30.00	1.181	9.20	0.362	0.68	3.880	15.05	0.592	10.23	2.300	6.00	0.236	0.80	0.031	7.5	316SS	CG	P
10.80	0.425	50310S	41.00	1.614	9.20	0.362	0.44	2.510	23.25	0.915	10.23	2.300	8.00	0.315	0.80	0.031	10.0	316SS	CG	P
10.80	0.425	50311S	46.00	1.811	9.20	0.362	0.44	2.510	23.25	0.915	10.23	2.300	8.40	0.331	0.80	0.031	10.5	316SS	CG	P
10.80	0.425	50312S	60.00	2.362	9.20	0.362	0.29	1.660	35.28	1.389	10.23	2.300	11.20	0.441	0.80	0.031	14.0	316SS	CG	P
10.80	0.425	50313S	66.00	2.598	9.20	0.362	0.30	1.710	34.10	1.343	10.23	2.300	11.60	0.457	0.80	0.031	14.5	316SS	CG	P
10.80	0.425	50314S	88.00	3.465	9.20	0.362	0.20	1.140	51.16	2.014	10.23	2.300	16.00	0.630	0.80	0.031	20.0	316SS	CG	P
10.80	0.425	50315S	97.00	3.819	9.20	0.362	0.20	1.140	51.16	2.014	10.23	2.300	16.40	0.646	0.80	0.031	20.5	316SS	CG	P
10.80	0.425	65479S	20.00	0.787	9.20	0.361	1.01	5.759	10.16	0.400	10.24	2.304	4.39	0.173	0.80	0.032	5.5	316SS	CG	P
10.80	0.425	65480S	30.00	1.181	9.20	0.361	0.64	3.665	15.95	0.628	10.23	2.302	5.99	0.236	0.80	0.032	7.5	316SS	CG	P
10.80	0.425	65481S	45.50	1.791	9.20	0.361	0.42	2.371	24.64	0.970	10.22	2.300	8.41	0.331	0.80	0.032	10.5	316SS	CG	P
10.80	0.425	65482S	66.00	2.598	9.20	0.361	0.28	1.586	36.86	1.451	10.23	2.301	11.61	0.457	0.80	0.032	14.5	316SS	CG	P
10.80	0.425	65483S	96																	

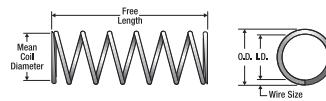


Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils Mat'l	Ends	Finish									
10.80	0.425	65678S	35.00	1.378	8.20	0.323	3.29	18.800	12.47	0.491	41.03	9.231	13.92	0.548	1.30	0.051	10.6	316 SS	CG	P
10.80	0.425	65679S	40.00	1.575	8.20	0.323	2.86	16.300	14.38	0.566	41.00	9.226	15.67	0.617	1.30	0.051	11.9	316 SS	CG	P
10.80	0.425	65680S	45.00	1.772	8.20	0.323	2.52	14.400	16.28	0.641	41.02	9.230	17.42	0.686	1.30	0.051	13.2	316 SS	CG	P
10.80	0.425	65681S	50.00	1.969	8.20	0.323	2.26	12.900	18.16	0.715	41.00	9.224	19.15	0.754	1.30	0.051	14.5	316 SS	CG	P
10.80	0.425	65682S	55.00	2.165	8.20	0.323	2.03	11.600	20.19	0.795	40.99	9.222	20.90	0.823	1.30	0.051	15.9	316 SS	CG	P
10.80	0.425	65683S	60.00	2.362	8.20	0.323	1.86	10.600	22.10	0.870	40.99	9.222	22.66	0.892	1.30	0.051	17.3	316 SS	CG	P
11.00	0.433	50316S	24.00	0.945	9.00	0.354	1.73	9.880	11.24	0.443	19.45	4.373	7.00	0.276	1.00	0.039	7.0	316 SS	CG	P
11.00	0.433	50317S	51.00	2.008	9.00	0.354	0.72	4.110	27.02	1.064	19.45	4.373	14.00	0.551	1.00	0.039	14.0	316 SS	CG	P
11.00	0.433	65565S	17.50	0.689	9.00	0.355	2.46	14.061	7.90	0.311	19.44	4.373	5.51	0.217	1.00	0.039	5.5	316 SS	CG	P
11.00	0.433	65566S	26.00	1.024	9.00	0.355	1.57	8.948	12.42	0.489	19.45	4.376	7.49	0.295	1.00	0.039	7.5	316 SS	CG	P
11.00	0.433	65567S	39.00	1.535	9.00	0.355	1.01	5.790	19.20	0.756	19.45	4.377	10.49	0.413	1.00	0.039	10.5	316 SS	CG	P
11.00	0.433	65568S	56.00	2.205	9.00	0.355	0.69	3.937	28.25	1.112	19.46	4.378	14.50	0.571	1.00	0.039	14.5	316 SS	CG	P
11.00	0.433	65569S	81.50	3.209	9.00	0.355	0.47	2.660	41.81	1.646	19.46	4.378	20.50	0.807	1.00	0.039	20.5	316 SS	CG	P
11.25	0.443	50318S	14.00	0.551	8.75	0.344	7.02	40.090	5.01	0.197	35.17	7.907	6.25	0.246	1.25	0.049	5.0	316 SS	CG	P
11.25	0.443	50319S	20.00	0.787	8.75	0.344	6.40	36.540	5.50	0.216	35.17	7.907	6.88	0.271	1.25	0.049	5.5	316 SS	CG	P
11.25	0.443	50320S	22.00	0.866	8.75	0.344	4.21	24.040	8.35	0.329	35.17	7.907	8.75	0.344	1.25	0.049	7.0	316 SS	CG	P
11.25	0.443	50321S	30.00	1.181	8.75	0.344	4.10	23.410	8.58	0.338	35.17	7.907	9.38	0.369	1.25	0.049	7.5	316 SS	CG	P
11.25	0.443	50322S	32.00	1.260	8.75	0.344	2.63	15.020	13.37	0.526	35.17	7.907	12.50	0.492	1.25	0.049	10.0	316 SS	CG	P
11.25	0.443	50323S	45.00	1.772	8.75	0.344	2.60	14.850	13.53	0.533	35.17	7.907	13.13	0.517	1.25	0.049	10.5	316 SS	CG	P
11.25	0.443	50324S	47.00	1.850	8.75	0.344	1.75	9.990	20.10	0.791	35.17	7.907	17.50	0.689	1.25	0.049	14.0	316 SS	CG	P
11.25	0.443	50325S	64.00	2.520	8.75	0.344	1.80	10.280	19.54	0.769	35.17	7.907	18.13	0.714	1.25	0.049	14.5	316 SS	CG	P
11.25	0.443	50326S	68.00	2.677	8.75	0.344	1.17	6.680	30.06	1.184	35.17	7.907	25.00	0.984	1.25	0.049	20.0	316 SS	CG	P
11.25	0.443	50327S	94.00	3.701	8.75	0.344	1.20	6.850	29.31	1.154	35.17	7.907	25.63	1.009	1.25	0.049	20.5	316 SS	CG	P
11.25	0.443	65653S	20.00	0.787	8.71	0.343	6.01	34.328	6.12	0.241	36.77	8.273	7.32	0.288	1.27	0.050	5.8	316 SS	CG	P
11.25	0.443	65654S	29.50	1.161	8.71	0.343	3.83	21.845	9.63	0.379	36.80	8.279	10.03	0.395	1.27	0.050	7.9	316 SS	CG	P
11.25	0.443	65655S	44.50	1.752	8.71	0.343	2.48	14.135	14.88	0.586	36.81	8.283	14.12	0.556	1.27	0.050	11.1	316 SS	CG	P
11.25	0.443	65656S	64.00	2.520	8.71	0.343	1.68	9.612	21.90	0.862	36.83	8.286	19.56	0.770	1.27	0.050	15.4	316 SS	CG	P
11.25	0.443	65657S	93.50	3.681	8.71	0.343	1.14	6.494	32.41	1.276	36.83	8.286	27.71	1.091	1.27	0.050	21.8	316 SS	CG	P
11.27	0.444	50328S	20.00	0.787	8.23	0.324	9.60	54.820	6.34	0.249	60.84	13.676	10.90	0.429	1.52	0.060	7.2	316 SS	CG	P
11.27	0.444	50329S	30.00	1.181	8.23	0.324	5.90	33.690	10.31	0.406	60.84	13.676	15.84	0.624	1.52	0.060	10.4	316 SS	CG	P
11.27	0.444	50330S	40.00	1.575	8.23	0.324	4.30	24.550	14.15	0.557	60.83	13.676	20.60	0.811	1.52	0.060	13.6	316 SS	CG	P
11.27	0.444	50331S	50.00	1.969	8.23	0.324	3.40	19.410	17.89	0.704	60.83	13.676	25.25	0.994	1.52	0.060	16.6	316 SS	CG	P
11.27	0.444	50332S	60.00	2.362	8.23	0.324	2.80	15.990	21.73	0.855	60.83	13.676	30.00	1.181	1.52	0.060	19.7	316 SS	CG	P
11.28	0.444	50333S	30.00	1.181	7.22	0.284	23.13	132.080	5.78	0.228	133.74	30.066	20.30	0.799	2.03	0.080	10.0	316 SS	CG	P
11.28	0.444	50334S	45.00	1.772	7.22	0.284	14.80	84.510	9.04	0.356	133.73	30.064	29.44	1.159	2.03	0.080	14.5	316 SS	CG	P
11.28	0.444	50335S	60.00	2.362	7.22	0.284	10.82	61.780	12.36	0.487	133.72	30.062	38.77	1.526	2.03	0.080	19.1	316 SS	CG	P
11.28	0.444	50336S	75.00	2.953	7.22	0.284	8.57	48.940	15.60	0.614	133.73	30.063	47.91	1.886	2.03	0.080	23.6	316 SS	CG	P
11.30	0.445	50337S	15.00	0.591	9.30	0.366	3.00	17.130	6.32	0.249	18.96	4.262	4.80	0.189	1.00	0.039	4.8	316 SS	CG	P
11.30	0.445	50338S	20.00	0.787	9.30	0.366	2.10	11.990	9.03	0.355	18.96	4.263	6.00	0.236	1.00	0.039	6.0	316 SS	CG	P
11.30	0.445	50339S	35.00	1.378	9.30	0.366	1.10	6.280	17.24	0.679	18.96	4.262	9.60	0.378	1.00	0.039	9.6	316 SS	CG	P
11.30	0.445	50340S	45.00	1.772	9.30	0.366	0.84	4.800	22.57	0.889	18.96	4.262	12.00	0.472	1.00	0.039	12.0	316 SS	CG	P
11.30	0.445	50341S	65.00	2.559	9.30	0.366	0.56	3.200	33.86	1.333	18.96	4.262	16.80	0.661	1.00	0.039	16.8	316 SS	CG	P
11.30	0.445	50342S	75.00	2.953	9.30	0.366	0.49	2.800	38.69	1.523	18.96	4.262	19.20	0.756	1.00	0.039	19.2	316 SS	CG	P
11.60	0.457	50343S	14.00	0.551	8.40	0.331	18.84	107.580	3.57	0.141	67.24	15.116	8.00	0.315	1.60	0.063	5.0	316 SS	CG	P
11.60	0.457	50344S	21.00	0.827	8.40	0.331	11.30	64.520	5.95	0.234	67.24	15.115	11.20	0.441	1.60	0.063	7.0	316 SS	CG	P
11.60	0.457	50345S	31.00	1.220	8.40	0.331	7.07	40.370	9.51	0.374	67.24	15.115	16.00	0.630	1.60	0.063	10.0	316 SS	CG	P
11.60	0.457	50346S	44.00	1.732	8.40	0.331	4.71	26.890	14.28	0.562	67.24	15.115	22.40	0.882	1.60	0.063	14.0	316 SS	CG	P
11.60	0.457	50347S	63.00	2.480	8.40	0.331	3.14	17.930	21.41	0.843	67.23	15.115	32.00	1.260	1.60	0.063	20.0	316 SS	CG	P
11.60	0.457	65718S	18.50	0.728	8.40	0.331	16.14	92.148	4.17	0.164	67.16	15.112	8.79	0.346	1.60	0.063	5.5	316 SS	CG	P
11.60	0.457	65719S	27.00	1.063	8.40	0.331	10.27	58.640	6.55	0.258	67.24	15.129	11.99	0.472	1.60	0.063	7.5	316 SS	CG	P
11.60	0.457	65720S	40.50	1.594	8.40	0.331	6.65	37.943	10.11	0.398	67.12	15.101	16.79	0.661	1.60	0.063	10.5	316 SS	CG	P
11.60	0.457	65721S	58.50	2.303	8.40	0.331	4.52	25.802	14.88	0.586	67.20	15.120	23.19	0.913	1.60	0.063	14.5	316 SS	CG	P
11.60	0.457	65722S	85.00	3.346	8.40	0.331	3.05	17.433	22.02	0.867	67.17	15.114	32.79	1.2						




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Def. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends Mat'l	En ds	F insh									
11.99	0.472	65540S	30.00	1.181	10.05	0.396	1.14	6.481	14.43	0.568	16.36	3.681	6.68	0.263	0.97	0.038	6.6	316SS	CG	P	
11.99	0.472	65541S	35.00	1.378	10.05	0.396	1.08	6.167	15.16	0.597	16.36	3.682	6.91	0.272	0.97	0.038	7.2	316SS	CG	P	
11.99	0.472	65542S	40.00	1.575	10.05	0.396	0.84	4.800	19.51	0.768	16.38	3.686	8.33	0.328	0.97	0.038	7.9	316SS	CG	P	
11.99	0.472	65543S	45.00	1.772	10.05	0.396	0.74	4.223	22.15	0.872	16.36	3.682	9.22	0.363	0.97	0.038	9.1	316SS	CG	P	
11.99	0.472	65544S	50.00	1.969	10.05	0.396	0.67	3.800	24.61	0.969	16.36	3.682	10.03	0.395	0.97	0.038	9.5	316SS	CG	P	
11.99	0.472	65545S	55.00	2.165	10.05	0.396	0.60	3.432	27.25	1.073	16.37	3.683	10.90	0.429	0.97	0.038	10.7	316SS	CG	P	
11.99	0.472	65546S	60.00	2.362	10.05	0.396	0.55	3.132	29.87	1.176	16.37	3.683	11.76	0.463	0.97	0.038	11.5	316SS	CG	P	
11.99	0.472	65547S	65.00	2.559	10.05	0.396	0.57	3.250	28.80	1.134	16.38	3.686	11.41	0.449	0.97	0.038	11.8	316SS	CG	P	
11.99	0.472	65548S	70.00	2.756	10.05	0.396	0.47	2.700	34.65	1.364	16.37	3.683	13.34	0.525	0.97	0.038	12.5	316SS	CG	P	
11.99	0.472	65549S	75.00	2.953	10.05	0.396	0.44	2.491	37.57	1.479	16.37	3.684	14.28	0.562	0.97	0.038	14.0	316SS	CG	P	
11.99	0.472	65684S	12.50	0.492	9.19	0.362	11.59	66.200	3.91	0.154	45.31	10.195	6.15	0.242	1.40	0.055	4.4	316SS	CG	P	
11.99	0.472	65685S	15.50	0.610	9.19	0.362	8.84	50.500	5.11	0.201	45.12	10.151	7.19	0.283	1.40	0.055	5.1	316SS	CG	P	
11.99	0.472	65686S	19.00	0.748	9.19	0.362	6.94	39.600	6.53	0.257	45.23	10.177	8.41	0.331	1.40	0.055	6.0	316SS	CG	P	
11.99	0.472	65687S	22.00	0.866	9.19	0.362	5.85	33.400	7.72	0.304	45.13	10.154	9.45	0.372	1.40	0.055	6.7	316SS	CG	P	
11.99	0.472	65688S	25.00	0.984	9.19	0.362	5.06	28.900	8.94	0.352	45.21	10.173	10.49	0.413	1.40	0.055	7.5	316SS	CG	P	
11.99	0.472	65689S	30.00	1.181	9.19	0.362	4.13	23.600	10.95	0.431	45.21	10.172	12.22	0.481	1.40	0.055	8.7	316SS	CG	P	
11.99	0.472	65690S	35.00	1.378	9.19	0.362	3.49	19.900	12.98	0.511	45.20	10.169	13.95	0.549	1.40	0.055	9.9	316SS	CG	P	
11.99	0.472	65691S	40.00	1.575	9.19	0.362	3.03	17.300	14.94	0.588	45.21	10.172	15.67	0.617	1.40	0.055	11.1	316SS	CG	P	
11.99	0.472	65692S	45.00	1.772	9.19	0.362	2.66	15.200	16.99	0.669	45.20	10.169	17.40	0.685	1.40	0.055	12.4	316SS	CG	P	
11.99	0.472	65693S	50.00	1.969	9.19	0.362	2.38	13.600	19.00	0.748	45.21	10.173	19.13	0.753	1.40	0.055	13.6	316SS	CG	P	
11.99	0.472	65694S	55.00	2.165	9.19	0.362	2.15	12.300	21.01	0.827	45.21	10.172	20.85	0.821	1.40	0.055	14.8	316SS	CG	P	
11.99	0.472	65695S	60.00	2.362	9.19	0.362	1.96	11.200	23.06	0.908	45.20	10.170	22.58	0.889	1.40	0.055	16.1	316SS	CG	P	
11.99	0.472	65696S	65.00	2.559	9.19	0.362	1.80	10.300	25.07	0.987	45.18	10.166	24.31	0.957	1.40	0.055	17.3	316SS	CG	P	
11.99	0.472	65697S	70.00	2.756	9.19	0.362	1.68	9.600	26.90	1.059	45.18	10.166	26.06	1.026	1.40	0.055	18.4	316SS	CG	P	
11.99	0.472	65698S	75.00	2.953	9.19	0.362	1.56	8.900	29.01	1.142	45.17	10.164	27.79	1.094	1.40	0.055	19.7	316SS	CG	P	
12.00	0.472	65748S	18.00	0.709	7.94	0.312	42.50	242.853	3.00	0.118	127.36	28.657	11.18	0.440	2.03	0.080	5.5	316SS	CG	P	
12.00	0.472	65749S	26.50	1.043	7.94	0.312	27.05	154.543	4.70	0.185	127.07	28.590	15.24	0.600	2.03	0.080	7.5	316SS	CG	P	
12.00	0.472	65750S	38.50	1.516	7.94	0.312	17.50	99.998	7.24	0.285	126.66	28.499	21.34	0.840	2.03	0.080	10.5	316SS	CG	P	
12.00	0.472	65751S	55.00	2.165	7.94	0.312	11.90	67.999	10.67	0.420	126.93	28.560	29.46	1.160	2.03	0.080	14.5	316SS	CG	P	
12.00	0.472	65752S	79.50	3.130	7.94	0.312	8.04	45.945	15.77	0.621	126.81	28.532	41.66	1.640	2.03	0.080	20.5	316SS	CG	P	
12.03	0.474	50368S	15.00	0.591	7.97	0.314	48.82	278.770	2.59	0.102	126.49	28.437	10.15	0.400	2.03	0.080	5.0	316SS	CG	P	
12.03	0.474	50369S	21.00	0.827	7.97	0.314	29.29	167.250	4.32	0.170	126.50	28.439	14.21	0.559	2.03	0.080	7.0	316SS	CG	P	
12.03	0.474	50370S	31.00	1.220	7.97	0.314	18.31	104.550	6.91	0.272	126.52	28.443	20.30	0.799	2.03	0.080	10.0	316SS	CG	P	
12.03	0.474	50371S	63.00	2.480	7.97	0.314	8.14	46.480	15.54	0.612	126.51	28.441	40.60	1.598	2.03	0.080	20.0	316SS	CG	P	
12.30	0.484	50372S	15.00	0.591	10.30	0.406	2.60	14.850	6.72	0.265	17.48	3.930	4.40	0.173	1.00	0.039	4.4	316SS	CG	P	
12.30	0.484	50373S	20.00	0.787	10.30	0.406	1.90	10.850	9.20	0.362	17.48	3.931	5.40	0.213	1.00	0.039	5.4	316SS	CG	P	
12.30	0.484	50374S	25.00	0.984	10.30	0.406	1.40	7.990	12.49	0.492	17.48	3.930	6.40	0.252	1.00	0.039	6.4	316SS	CG	P	
12.30	0.484	50375S	35.00	1.378	10.30	0.406	0.99	5.650	17.66	0.695	17.48	3.930	8.40	0.331	1.00	0.039	8.4	316SS	CG	P	
12.30	0.484	50376S	45.00	1.772	10.30	0.406	0.74	4.230	23.63	0.930	17.48	3.930	10.50	0.413	1.00	0.039	10.5	316SS	CG	P	
12.30	0.484	50377S	55.00	2.165	10.30	0.406	0.60	3.430	29.14	1.147	17.48	3.930	12.50	0.492	1.00	0.039	12.5	316SS	CG	P	
12.30	0.484	50378S	65.00	2.559	10.30	0.406	0.50	2.860	34.97	1.377	17.48	3.930	14.60	0.575	1.00	0.039	14.6	316SS	CG	P	
12.30	0.484	50379S	75.00	2.953	10.30	0.406	0.43	2.460	40.66	1.601	17.48	3.930	16.60	0.654	1.00	0.039	16.6	316SS	CG	P	
12.30	0.484	50380S	85.00	3.346	10.30	0.406	0.38	2.170	46.01	1.811	17.48	3.930	18.60	0.732	1.00	0.039	18.6	316SS	CG	P	
12.32	0.485	50381S	15.00	0.591	9.28	0.365	11.00	62.810	5.10	0.201	126.02	8.09	0.319	1.52	0.060	5.3	316SS	CG	P		
12.32	0.485	50382S	25.00	0.984	9.28	0.365	6.10	34.830	9.19	0.362	126.05	8.05	12.601	12.14	0.478	1.52	0.060	8.0	316SS	CG	P
12.32	0.485	50383S	35.00	1.378	9.28	0.365	4.20	23.980	13.35	0.525	126.05	8.04	12.601	16.26	0.640	1.52	0.060	10.7	316SS	CG	P
12.32	0.485	50384S	45.00	1.772	9.28	0.365	3.20	18.270	17.52	0.690	126.05	8.03	20.40	1.803	1.52	0.060	13.4	316SS	CG	P	
12.32	0.485	50385S	55.00	2.165	9.28	0.365	2.60	14.850	21.56	0.849	126.05	8.02	24.41	1.961	1.52	0.060	16.1	316SS	CG	P	
12.33	0.485	50386S	15.00	0.591	8.27	0.326	39.00	222.700	3.18	0.125	123.83	27.837	11.04	0.435	2.03	0.080	5.4	316SS	CG	P	
12.33	0.485	50387S	25.00	0.984	8.27	0.326	21.00	119.910	5.90	0.232	123.82	27.835	17.01	0.670	2.03	0.080	8.4	316SS	CG	P	
12.33	0.485	50388S	35.00	1.378	8.27	0.326	14.00	79.940	8.85	0.348	123.83	27.838	23.49	0.925	2.03	0.080	11.6	316SS	CG	P	
12.33	0.485	50389S	45.00	1.772	8.27	0.326	11.00	62.810	11.26	0.443	123.83	27.837	28.81	1.134	2.03	0.080	14.2	316SS	CG	P	
12.33	0.485	50390S	50.00	1.969	8.27	0.326	10.15</														




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils Mat'l	Ends	Finish									
13.32	0.524	50416S	70.00	2.756	10.28	0.405	1.70	9.710	30.67	1.207	52.14	11.721	28.09	1.106	1.52	0.060	18.5	316 SS	CG	P
13.33	0.525	50417S	20.00	0.787	9.27	0.365	22.00	125.620	5.25	0.207	115.57	25.980	13.42	0.528	2.03	0.080	6.6	316 SS	CG	P
13.33	0.525	50418S	30.00	1.181	9.27	0.365	14.00	79.940	8.26	0.325	115.57	25.981	18.78	0.739	2.03	0.080	9.3	316 SS	CG	P
13.33	0.525	50419S	40.00	1.575	9.27	0.365	10.00	57.100	11.56	0.455	115.57	25.981	24.66	0.971	2.03	0.080	12.2	316 SS	CG	P
13.33	0.525	50420S	50.00	1.969	9.27	0.365	7.90	45.110	14.63	0.576	115.58	25.983	30.15	1.187	2.03	0.080	14.9	316 SS	CG	P
13.33	0.525	50421S	60.00	2.362	9.27	0.365	6.50	37.120	17.78	0.700	115.58	25.983	35.77	1.408	2.03	0.080	17.6	316 SS	CG	P
13.33	0.525	50422S	70.00	2.756	9.27	0.365	5.50	31.410	21.01	0.827	115.57	25.982	41.53	1.635	2.03	0.080	20.5	316 SS	CG	P
13.50	0.531	50423S	22.00	0.866	11.50	0.453	1.47	8.390	10.88	0.428	15.99	3.594	5.00	0.197	1.00	0.039	5.0	316 SS	CG	P
13.50	0.531	50424S	33.00	1.299	11.50	0.453	0.88	5.020	18.17	0.715	15.99	3.594	7.00	0.276	1.00	0.039	7.0	316 SS	CG	P
13.50	0.531	50425S	50.00	1.969	11.50	0.453	0.55	3.140	29.07	1.144	15.99	3.594	10.00	0.394	1.00	0.039	10.0	316 SS	CG	P
13.50	0.531	50426S	73.00	2.874	11.50	0.453	0.37	2.110	43.21	1.701	15.99	3.594	14.00	0.551	1.00	0.039	14.0	316 SS	CG	P
13.50	0.531	65570S	24.00	0.945	11.50	0.453	1.26	7.199	12.70	0.500	16.00	3.600	5.51	0.217	1.00	0.039	5.5	316 SS	CG	P
13.50	0.531	65571S	36.50	1.437	11.50	0.453	0.80	4.581	19.96	0.786	16.00	3.601	7.49	0.295	1.00	0.039	7.5	316 SS	CG	P
13.50	0.531	65572S	55.50	2.185	11.50	0.453	0.52	2.964	30.86	1.215	16.00	3.601	10.49	0.413	1.00	0.039	10.5	316 SS	CG	P
13.50	0.531	65573S	80.50	3.169	11.50	0.453	0.35	2.016	45.36	1.786	16.00	3.601	14.50	0.571	1.00	0.039	14.5	316 SS	CG	P
13.50	0.531	65574S	115.00	4.528	11.50	0.453	0.24	1.362	67.16	2.644	16.00	3.601	20.50	0.807	1.00	0.039	20.5	316 SS	CG	P
13.51	0.532	65612S	12.50	0.492	11.33	0.446	3.40	19.400	5.94	0.234	20.18	4.540	4.34	0.171	1.09	0.043	3.9	316 SS	CG	P
13.51	0.532	65613S	15.50	0.610	11.33	0.446	2.65	15.100	7.65	0.301	20.20	4.545	4.95	0.195	1.09	0.043	4.4	316 SS	CG	P
13.51	0.532	65614S	19.00	0.748	11.33	0.446	2.08	11.900	9.68	0.381	20.15	4.534	5.69	0.224	1.09	0.043	5.1	316 SS	CG	P
13.51	0.532	65615S	22.00	0.866	11.33	0.446	1.77	10.100	11.41	0.449	20.16	4.535	6.30	0.248	1.09	0.043	5.6	316 SS	CG	P
13.51	0.532	65616S	25.00	0.984	11.33	0.446	1.54	8.800	13.11	0.516	20.18	4.541	6.93	0.273	1.09	0.043	6.2	316 SS	CG	P
13.51	0.532	65617S	30.00	1.181	11.33	0.446	1.26	7.197	16.03	0.631	20.18	4.541	7.98	0.314	1.09	0.043	7.2	316 SS	CG	P
13.51	0.532	65618S	35.00	1.378	11.33	0.446	1.07	6.100	18.90	0.744	20.17	4.538	9.02	0.355	1.09	0.043	8.0	316 SS	CG	P
13.51	0.532	65619S	40.00	1.575	11.33	0.446	0.93	5.298	21.77	0.857	20.18	4.540	10.03	0.395	1.09	0.043	9.1	316 SS	CG	P
13.51	0.532	65620S	45.00	1.772	11.33	0.446	0.82	4.700	24.54	0.966	20.18	4.540	11.07	0.436	1.09	0.043	9.8	316 SS	CG	P
13.51	0.532	65621S	50.00	1.969	11.33	0.446	0.74	4.200	27.43	1.080	20.16	4.536	12.12	0.477	1.09	0.043	10.7	316 SS	CG	P
13.51	0.532	65622S	55.00	2.165	11.33	0.446	0.67	3.800	30.33	1.194	20.16	4.537	13.16	0.518	1.09	0.043	11.6	316 SS	CG	P
13.51	0.532	65623S	60.00	2.362	11.33	0.446	0.61	3.500	32.94	1.297	20.18	4.540	14.20	0.559	1.09	0.043	12.4	316 SS	CG	P
13.51	0.532	65624S	65.00	2.559	11.33	0.446	0.56	3.200	36.02	1.418	20.17	4.538	15.24	0.600	1.09	0.043	13.4	316 SS	CG	P
13.51	0.532	65625S	70.00	2.756	11.33	0.446	0.51	2.900	39.75	1.565	20.17	4.539	16.28	0.641	1.09	0.043	14.6	316 SS	CG	P
13.51	0.532	65626S	75.00	2.953	11.33	0.446	0.47	2.700	42.70	1.681	20.17	4.539	17.30	0.681	1.09	0.043	15.5	316 SS	CG	P
13.75	0.541	50427S	19.00	0.748	11.25	0.443	3.59	20.500	8.11	0.319	29.10	6.542	6.25	0.246	1.25	0.049	5.0	316 SS	CG	P
13.75	0.541	50428S	27.00	1.063	11.25	0.443	3.30	18.840	8.82	0.347	29.10	6.542	6.88	0.271	1.25	0.049	5.5	316 SS	CG	P
13.75	0.541	50429S	29.00	1.142	11.25	0.443	2.16	12.330	13.47	0.530	29.10	6.542	8.75	0.344	1.25	0.049	7.0	316 SS	CG	P
13.75	0.541	50430S	42.00	1.654	11.25	0.443	2.10	11.990	13.86	0.546	29.10	6.542	9.38	0.369	1.25	0.049	7.5	316 SS	CG	P
13.75	0.541	50431S	44.00	1.732	11.25	0.443	1.35	7.710	21.56	0.849	29.10	6.542	12.50	0.492	1.25	0.049	10.0	316 SS	CG	P
13.75	0.541	50432S	63.00	2.480	11.25	0.443	1.30	7.420	22.39	0.881	29.10	6.542	13.13	0.517	1.25	0.049	10.5	316 SS	CG	P
13.75	0.541	50433S	63.00	2.480	11.25	0.443	0.90	5.140	32.33	1.273	29.10	6.542	17.50	0.689	1.25	0.049	14.0	316 SS	CG	P
13.75	0.541	50434S	91.00	3.583	11.25	0.443	0.91	5.200	31.98	1.259	29.10	6.542	18.13	0.714	1.25	0.049	14.5	316 SS	CG	P
13.75	0.541	50435S	93.00	3.661	11.25	0.443	0.60	3.430	48.50	1.910	29.10	6.542	25.00	0.984	1.25	0.049	20.0	316 SS	CG	P
13.75	0.541	50436S	130.00	5.118	11.25	0.443	0.62	3.540	46.94	1.848	29.10	6.542	25.63	1.009	1.25	0.049	20.5	316 SS	CG	P
13.75	0.541	65658S	27.00	1.063	11.21	0.441	3.08	17.576	9.93	0.391	30.54	6.872	7.32	0.288	1.27	0.050	5.8	316 SS	CG	P
13.75	0.541	65659S	41.50	1.634	11.21	0.441	1.96	11.185	15.60	0.614	30.52	6.868	10.03	0.395	1.27	0.050	7.9	316 SS	CG	P
13.75	0.541	65660S	62.50	2.461	11.21	0.441	1.27	7.237	24.08	0.948	30.49	6.861	14.12	0.556	1.27	0.050	11.1	316 SS	CG	P
13.75	0.541	65661S	90.50	3.563	11.21	0.441	0.86	4.921	35.43	1.395	30.51	6.865	19.58	0.771	1.27	0.050	15.4	316 SS	CG	P
13.75	0.541	65662S	130.00	5.118	11.21	0.441	0.58	3.325	52.43	2.064	30.50	6.863	27.76	1.093	1.27	0.050	21.9	316 SS	CG	P
13.93	0.548	50437S	15.00	0.591	10.27	0.404	19.00	108.490	4.43	0.174	84.13	18.914	8.91	0.351	1.83	0.072	4.9	316 SS	CG	P
13.93	0.548	50438S	25.00	0.984	10.27	0.404	10.00	57.100	8.41	0.331	84.13	18.913	13.65	0.537	1.83	0.072	7.5	316 SS	CG	P
13.93	0.548	50439S	35.00	1.378	10.27	0.404	7.00	39.970	12.02	0.473	84.13	18.912	17.93	0.706	1.83	0.072	9.8	316 SS	CG	P
13.93	0.548	50440S	45.00	1.772	10.27	0.404	5.20	29.690	16.18	0.637	84.13	18.912	22.88	0.901	1.83	0.072	12.5	316 SS	CG	P
13.93	0.548	50441S	55.00	2.165	10.27	0.404	4.20	23.980	20.03	0.789	84.13	18.912	27.45	1.081	1.83	0.072	15.0	316 SS	CG	P
13.93	0.548	50442S	65.00	2.559	10.27	0.404	3.50	19.990	24.04	0.946	84.13	18.912	32.21	1.268	1.83	0.072	17.6	316 SS	CG	P
13.93	0.548	50443S	75.00	2.953	10.27	0.404	3.00	17.130	28.04	1.104	84.13									




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Def. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends Mat'l	En ds	F insh									
14.50	0.571	65753S	22.50	0.886	10.44	0.411	21.63	123.583	4.95	0.195	107.11	24.099	11.18	0.440	2.03	0.080	5.5	316SS	CG	P	
14.50	0.571	65754S	33.00	1.299	10.44	0.411	13.76	78.643	7.77	0.306	106.96	24.065	15.24	0.600	2.03	0.080	7.5	316SS	CG	P	
14.50	0.571	65755S	49.50	1.949	10.44	0.411	8.91	50.887	12.04	0.474	107.20	24.120	21.34	0.840	2.03	0.080	10.5	316SS	CG	P	
14.50	0.571	65756S	71.00	2.795	10.44	0.411	6.06	34.603	17.68	0.696	107.04	24.084	29.46	1.160	2.03	0.080	14.5	316SS	CG	P	
14.50	0.571	65757S	105.00	4.134	10.44	0.411	4.09	23.380	26.19	1.031	107.13	24.105	41.66	1.640	2.03	0.080	20.5	316SS	CG	P	
14.53	0.572	50464S	17.00	0.669	10.47	0.412	25.00	142.750	4.28	0.168	106.95	24.043	10.15	0.400	2.03	0.080	5.0	316SS	CG	P	
14.53	0.572	50465S	37.00	1.457	10.47	0.412	9.37	53.500	11.41	0.449	106.95	24.043	20.30	0.799	2.03	0.080	10.0	316SS	CG	P	
14.70	0.579	50466S	20.00	0.787	12.30	0.484	2.80	15.990	8.84	0.348	24.74	5.561	5.64	0.222	1.20	0.047	4.7	316SS	CG	P	
14.70	0.579	50467S	30.00	1.181	12.30	0.484	1.90	10.850	13.02	0.513	24.74	5.561	7.32	0.288	1.20	0.047	6.1	316SS	CG	P	
14.70	0.579	50468S	40.00	1.575	12.30	0.484	1.20	6.850	20.61	0.812	24.74	5.561	9.84	0.387	1.20	0.047	8.2	316SS	CG	P	
14.70	0.579	50469S	50.00	1.969	12.30	0.484	0.97	5.540	25.50	1.004	24.74	5.561	11.88	0.468	1.20	0.047	9.9	316SS	CG	P	
14.70	0.579	50470S	60.00	2.362	12.30	0.484	0.80	4.570	30.92	1.217	24.74	5.561	13.92	0.548	1.20	0.047	11.6	316SS	CG	P	
14.70	0.579	50471S	70.00	2.756	12.30	0.484	0.68	3.880	36.38	1.432	24.74	5.561	15.96	0.628	1.20	0.047	13.3	316SS	CG	P	
14.70	0.579	50472S	80.00	3.150	12.30	0.484	0.59	3.370	41.93	1.651	24.74	5.561	18.00	0.709	1.20	0.047	15.0	316SS	CG	P	
15.00	0.591	50473S	18.00	0.709	10.00	0.394	57.50	328.330	3.14	0.124	180.78	40.641	12.50	0.492	2.50	0.098	5.0	316SS	CG	P	
15.00	0.591	50474S	22.00	0.866	10.00	0.394	52.00	296.930	3.48	0.137	180.80	40.646	13.75	0.541	2.50	0.098	5.5	316SS	CG	P	
15.00	0.591	50475S	26.00	1.024	10.00	0.394	34.50	197.000	5.24	0.206	180.78	40.641	17.50	0.689	2.50	0.098	7.0	316SS	CG	P	
15.00	0.591	50476S	32.00	1.260	10.00	0.394	33.00	188.430	5.48	0.216	180.77	40.640	18.75	0.738	2.50	0.098	7.5	316SS	CG	P	
15.00	0.591	50477S	38.00	1.496	10.00	0.394	21.56	123.110	8.39	0.330	180.78	40.641	25.00	0.984	2.50	0.098	10.0	316SS	CG	P	
15.00	0.591	50478S	48.00	1.890	10.00	0.394	21.00	119.910	8.61	0.339	180.79	40.643	26.25	1.033	2.50	0.098	10.5	316SS	CG	P	
15.00	0.591	50479S	54.00	2.126	10.00	0.394	14.38	82.110	12.57	0.495	180.79	40.642	35.00	1.378	2.50	0.098	14.0	316SS	CG	P	
15.00	0.591	50480S	68.00	2.677	10.00	0.394	15.00	85.650	12.05	0.474	180.78	40.641	36.25	1.427	2.50	0.098	14.5	316SS	CG	P	
15.00	0.591	50481S	78.00	3.071	10.00	0.394	9.58	54.700	18.87	0.743	180.78	40.642	50.00	1.969	2.50	0.098	20.0	316SS	CG	P	
15.00	0.591	50482S	98.00	3.858	10.00	0.394	9.90	56.530	18.26	0.719	180.78	40.642	51.25	2.018	2.50	0.098	20.5	316SS	CG	P	
15.01	0.591	65627S	12.50	0.492	12.63	0.497	3.56	20.300	6.50	0.256	23.10	5.197	4.70	0.185	1.19	0.047	3.9	316SS	CG	P	
15.01	0.591	65628S	15.50	0.610	12.63	0.497	2.75	15.700	8.41	0.331	23.10	5.197	5.39	0.212	1.19	0.047	4.4	316SS	CG	P	
15.01	0.591	65629S	19.00	0.748	12.63	0.497	2.17	12.400	10.67	0.420	23.15	5.208	6.17	0.243	1.19	0.047	5.1	316SS	CG	P	
15.01	0.591	65630S	22.00	0.866	12.63	0.497	1.84	10.500	12.60	0.496	23.15	5.208	6.86	0.270	1.19	0.047	5.6	316SS	CG	P	
15.01	0.591	65631S	25.00	0.984	12.63	0.497	1.59	9.100	14.53	0.572	23.13	5.205	7.52	0.296	1.19	0.047	6.2	316SS	CG	P	
15.01	0.591	65632S	30.00	1.181	12.63	0.497	1.30	7.400	17.86	0.703	23.12	5.202	8.66	0.341	1.19	0.047	7.1	316SS	CG	P	
15.01	0.591	65633S	35.00	1.378	12.63	0.497	1.10	6.300	20.98	0.826	23.13	5.204	9.80	0.386	1.19	0.047	8.0	316SS	CG	P	
15.01	0.591	65634S	40.00	1.575	12.63	0.497	0.96	5.500	24.03	0.946	23.12	5.203	10.95	0.431	1.19	0.047	8.9	316SS	CG	P	
15.01	0.591	65635S	45.00	1.772	12.63	0.497	0.84	4.800	27.53	1.084	23.12	5.203	12.07	0.475	1.19	0.047	9.9	316SS	CG	P	
15.01	0.591	65636S	50.00	1.969	12.63	0.497	0.75	4.300	30.73	1.210	23.12	5.203	13.21	0.520	1.19	0.047	10.8	316SS	CG	P	
15.01	0.591	65637S	55.00	2.165	12.63	0.497	0.68	3.900	33.88	1.334	23.12	5.203	14.35	0.565	1.19	0.047	11.7	316SS	CG	P	
15.01	0.591	65638S	60.00	2.362	12.63	0.497	0.63	3.600	36.73	1.446	23.14	5.206	15.47	0.609	1.19	0.047	12.5	316SS	CG	P	
15.01	0.591	65639S	65.00	2.559	12.63	0.497	0.58	3.300	40.06	1.577	23.13	5.204	16.61	0.654	1.19	0.047	13.5	316SS	CG	P	
15.01	0.591	65640S	70.00	2.756	12.63	0.497	0.53	3.000	44.07	1.735	23.13	5.205	17.76	0.699	1.19	0.047	14.6	316SS	CG	P	
15.01	0.591	65641S	80.00	3.150	12.63	0.497	0.46	2.600	50.85	2.002	23.13	5.205	20.02	0.788	1.19	0.047	16.6	316SS	CG	P	
15.01	0.591	65642S	90.00	3.543	12.63	0.497	0.41	2.341	56.46	2.223	23.13	5.204	22.28	0.877	1.19	0.047	18.5	316SS	CG	P	
15.01	0.591	65728S	15.50	0.610	11.81	0.465	0.63	3.600	36.73	1.446	23.14	5.206	15.47	0.609	1.19	0.047	12.5	316SS	CG	P	
15.01	0.591	65729S	19.00	0.748	11.81	0.465	0.57	3.000	36.73	1.542	23.13	5.204	16.61	0.654	1.19	0.047	13.5	316SS	CG	P	
15.01	0.591	65730S	22.00	0.866	11.81	0.465	0.53	3.000	44.07	1.735	23.13	5.205	17.76	0.699	1.19	0.047	14.6	316SS	CG	P	
15.01	0.591	65731S	25.00	0.984	11.81	0.465	0.52	3.200	50.85	2.002	23.13	5.205	20.02	0.788	1.19	0.047	16.6	316SS	CG	P	
15.01	0.591	65732S	30.00	1.181	11.81	0.465	0.47	2.61	14.900	20.32	0.800	23.13	5.208	17.55	0.691	1.19	0.063	7.1	316SS	CG	P
15.01	0.591	65733S	35.00	1.378	11.81	0.465	0.385	22.000	13.77	0.542	23.00	5.194	12.95	0.510	1.19	0.063	8.1	316SS	CG	P	
15.01	0.591	65734S	40.00	1.575	11.81	0.465	0.33	19.000	15.93	0.627	23.05	5.195	11.913	14.48	0.570	1.19	0.063	9.0	316SS	CG	P
15.01	0.591	65735S	45.00	1.772	11.81	0.465	0.293	16.700	18.11	0.713	23.02	5.192	11.907	16.00	0.630	1.19	0.063	10.0	316SS	CG	P
15.01	0.591	65736S	50.00	1.969	11.81	0.465	0.261	14.900	20.32	0.800	23.02	5.198	12.95	0.691	1.19	0.063	11.0	316SS	CG	P	
15.01	0.591	65737S	55.00	2.165	11.81	0.465	0.236	13.500	22.40	0.882	23.02	5.192	11.907	19.08	0.751	1.19	0.063	11.9	316SS	CG	P
15.01	0.591	65738S	60.00	2.362	11.81	0.465	0.215	12.300	24.61	0.969	23.02	5.197	11.919	20.60	0.811	1.19	0.063	12.9	316SS	CG	P
15.01	0.591	65739S	65.00	2.559	11.81	0.465	0.198	11.300	26.77	1.054	23.02	5.193	11.910	22.15	0.872	1.19	0.063	13.8	316SS	CG	




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils Mat'l	Ends E nsh	Finish F insh									
16.33	0.643	50506S	50.00	1.969	12.27	0.483	5.20	29.690	18.48	0.728	21.604	23.61	0.930	2.03	0.080	11.6	316 SS	CG	P	
16.33	0.643	50507S	60.00	2.362	12.27	0.483	4.30	24.550	22.35	0.880	21.605	27.71	1.091	2.03	0.080	13.7	316 SS	CG	P	
16.33	0.643	50508S	70.00	2.756	12.27	0.483	3.60	20.560	26.70	1.051	21.605	32.30	1.272	2.03	0.080	15.9	316 SS	CG	P	
16.33	0.643	50509S	80.00	3.150	12.27	0.483	3.10	17.700	31.00	1.221	21.605	36.86	1.451	2.03	0.080	18.2	316 SS	CG	P	
16.35	0.644	50510S	35.00	1.378	10.25	0.404	52.88	301.950	5.47	0.215	288.99	64.967	24.40	0.961	3.05	0.120	8.0	316 SS	CG	P
16.35	0.644	50511S	50.00	1.969	10.25	0.404	34.86	199.060	8.29	0.326	288.96	64.960	33.86	1.333	3.05	0.120	11.1	316 SS	CG	P
16.35	0.644	50512S	65.00	2.559	10.25	0.404	26.22	149.720	11.02	0.434	288.97	64.963	43.01	1.693	3.05	0.120	14.1	316 SS	CG	P
16.35	0.644	50513S	80.00	3.150	10.25	0.404	20.87	119.170	13.85	0.545	288.97	64.962	52.46	2.065	3.05	0.120	17.2	316 SS	CG	P
16.70	0.657	50514S	25.00	0.984	14.30	0.563	1.90	10.850	11.52	0.453	21.88	4.919	5.64	0.222	1.20	0.047	4.7	316 SS	CG	P
16.70	0.657	50515S	35.00	1.378	14.30	0.563	1.20	6.850	18.23	0.718	21.88	4.919	7.32	0.288	1.20	0.047	6.1	316 SS	CG	P
16.70	0.657	50516S	45.00	1.772	14.30	0.563	0.94	5.370	23.28	0.916	21.88	4.919	8.88	0.350	1.20	0.047	7.4	316 SS	CG	P
16.70	0.657	50517S	55.00	2.165	14.30	0.563	0.75	4.280	29.17	1.149	21.88	4.919	10.56	0.416	1.20	0.047	8.8	316 SS	CG	P
16.70	0.657	50518S	65.00	2.559	14.30	0.563	0.63	3.600	34.73	1.367	21.88	4.919	12.12	0.477	1.20	0.047	10.1	316 SS	CG	P
16.70	0.657	50519S	75.00	2.953	14.30	0.563	0.53	3.030	41.28	1.625	21.88	4.919	13.80	0.543	1.20	0.047	11.5	316 SS	CG	P
16.70	0.657	50520S	85.00	3.346	14.30	0.563	0.47	2.680	46.55	1.833	21.88	4.919	15.36	0.605	1.20	0.047	12.8	316 SS	CG	P
17.25	0.679	50521S	28.00	1.102	14.75	0.581	1.71	9.760	13.69	0.539	23.42	5.264	6.25	0.246	1.25	0.049	5.0	316 SS	CG	P
17.25	0.679	50522S	41.00	1.614	14.75	0.581	1.60	9.140	14.63	0.576	23.41	5.264	6.88	0.271	1.25	0.049	5.5	316 SS	CG	P
17.25	0.679	50523S	42.00	1.654	14.75	0.581	1.03	5.880	22.73	0.895	23.42	5.264	8.75	0.344	1.25	0.049	7.0	316 SS	CG	P
17.25	0.679	50524S	62.00	2.441	14.75	0.581	0.99	5.650	23.65	0.931	23.42	5.264	9.38	0.369	1.25	0.049	7.5	316 SS	CG	P
17.25	0.679	50525S	64.00	2.520	14.75	0.581	0.64	3.650	36.59	1.440	23.42	5.264	12.50	0.492	1.25	0.049	10.0	316 SS	CG	P
17.25	0.679	50526S	93.00	3.661	14.75	0.581	0.43	2.460	54.45	2.144	23.42	5.264	17.50	0.689	1.25	0.049	14.0	316 SS	CG	P
17.25	0.679	50527S	94.00	3.701	14.75	0.581	0.64	3.650	36.59	1.440	23.42	5.264	13.13	0.517	1.25	0.049	10.5	316 SS	CG	P
17.25	0.679	50528S	137.00	5.394	14.75	0.581	0.29	1.660	80.74	3.179	23.42	5.264	25.00	0.984	1.25	0.049	20.0	316 SS	CG	P
17.25	0.679	50529S	140.00	5.512	14.75	0.581	0.44	2.510	53.22	2.095	23.42	5.264	18.13	0.714	1.25	0.049	14.5	316 SS	CG	P
17.25	0.679	50530S	205.00	8.071	14.75	0.581	0.29	1.660	80.74	3.179	23.42	5.264	25.63	1.009	1.25	0.049	20.5	316 SS	CG	P
17.25	0.679	65663S	40.50	1.594	14.71	0.579	1.47	8.381	16.74	0.659	24.55	5.523	7.32	0.288	1.27	0.050	5.8	316 SS	CG	P
17.25	0.679	65664S	62.00	2.441	14.71	0.579	0.93	5.333	26.29	1.035	24.53	5.520	10.03	0.395	1.27	0.050	7.9	316 SS	CG	P
17.25	0.679	65665S	94.00	3.701	14.71	0.579	0.60	3.451	40.64	1.600	24.54	5.522	14.10	0.555	1.27	0.050	11.1	316 SS	CG	P
17.25	0.679	65666S	140.00	5.512	14.71	0.579	0.41	2.347	59.77	2.353	24.54	5.522	19.53	0.769	1.27	0.050	15.4	316 SS	CG	P
17.25	0.679	65667S	205.00	8.071	14.71	0.579	0.27	1.539	91.14	3.588	24.54	5.522	28.45	1.120	1.27	0.050	22.4	316 SS	CG	P
17.30	0.681	50531S	25.00	0.984	12.30	0.484	24.17	138.010	6.59	0.259	159.28	35.808	15.75	0.620	2.50	0.098	6.3	316 SS	CG	P
17.30	0.681	50532S	35.00	1.378	12.30	0.484	16.24	92.730	9.81	0.386	159.27	35.804	21.00	0.827	2.50	0.098	8.4	316 SS	CG	P
17.30	0.681	50533S	45.00	1.772	12.30	0.484	12.23	69.840	13.02	0.513	159.27	35.806	26.25	1.033	2.50	0.098	10.5	316 SS	CG	P
17.30	0.681	50534S	55.00	2.165	12.30	0.484	9.80	55.960	16.25	0.640	159.27	35.805	31.50	1.240	2.50	0.098	12.6	316 SS	CG	P
17.30	0.681	50535S	65.00	2.559	12.30	0.484	8.12	46.370	19.62	0.772	159.27	35.806	37.00	1.457	2.50	0.098	14.8	316 SS	CG	P
17.30	0.681	50536S	75.00	2.953	12.30	0.484	6.98	39.860	22.82	0.898	159.27	35.805	42.25	1.663	2.50	0.098	16.9	316 SS	CG	P
17.32	0.682	50537S	20.00	0.787	14.28	0.562	4.90	27.980	8.30	0.327	40.69	9.146	6.66	0.262	1.52	0.060	4.4	316 SS	CG	P
17.32	0.682	50538S	30.00	1.181	14.28	0.562	3.00	17.130	13.56	0.534	40.68	9.146	8.95	0.352	1.52	0.060	5.9	316 SS	CG	P
17.32	0.682	50539S	40.00	1.575	14.28	0.562	2.10	11.990	19.37	0.763	40.68	9.146	11.49	0.452	1.52	0.060	7.6	316 SS	CG	P
17.32	0.682	50540S	50.00	1.969	14.28	0.562	1.70	9.710	23.93	0.942	40.68	9.146	13.48	0.531	1.52	0.060	8.9	316 SS	CG	P
17.32	0.682	50541S	60.00	2.362	14.28	0.562	1.40	7.990	29.06	1.144	40.68	9.146	15.72	0.619	1.52	0.060	10.3	316 SS	CG	P
17.32	0.682	50542S	70.00	2.756	14.28	0.562	1.20	6.850	33.90	1.335	40.68	9.146	17.83	0.702	1.52	0.060	11.7	316 SS	CG	P
17.32	0.682	50543S	80.00	3.150	14.28	0.562	1.00	5.710	40.68	1.602	40.68	9.146	20.78	0.818	1.52	0.060	13.7	316 SS	CG	P
17.60	0.693	50544S	24.00	0.945	14.40	0.567	4.60	26.270	9.90	0.390	45.56	10.242	8.00	0.315	1.60	0.063	5.0	316 SS	CG	P
17.60	0.693	50545S	36.00	1.417	14.40	0.567	2.76	15.760	16.51	0.650	45.56	10.242	11.20	0.441	1.60	0.063	7.0	316 SS	CG	P
17.60	0.693	50546S	55.00	2.165	14.40	0.567	1.73	9.880	26.34	1.037	45.56	10.242	16.00	0.630	1.60	0.063	10.0	316 SS	CG	P
17.60	0.693	50547S	79.00	3.110	14.40	0.567	1.15	6.570	39.62	1.560	45.56	10.242	22.40	0.882	1.60	0.063	14.0	316 SS	CG	P
17.60	0.693	50548S	116.00	4.567	14.40	0.567	0.77	4.400	59.17	2.329	45.56	10.242	32.00	1.260	1.60	0.063	20.0	316 SS	CG	P
17.60	0.693	50549S	34.00	1.339	14.40	0.567	3.94	22.497	11.56	0.455	45.49	10.236	8.79	0.346	1.60	0.063	5.5	316 SS	CG	P
17.60	0.693	50549S	51.50	2.028	14.40	0.567	2.47	14.087	18.47	0.727	45.52	10.241	11.99	0.472	1.60	0.063	7.5	316 SS	CG	P
17.60	0.693	50545S	77.50	3.051	14.40	0.567	1.62	9.264	28.09	1.106	45.54	10.246	16.79	0.661	1.60	0.063	10.5	316 SS	CG	P
17.60	0.693	50546S	110.00	4.331	14.40	0.567	1.10	6.299	41.33	1.627	45.55	10.248	23.19	0.913	1.60	0.063	14.5	316 SS	CG	P
17.60	0.693	50547S	165.00	6.496	14.40	0.567	0.75	4.256												




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Def. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends Mat'l	En ds	F insh								
18.29	0.720	65711S	70.00	2.756	15.49	0.610	0.86	4.900	35.31	1.390	30.27	6.811	13.97	0.550	1.40	0.055	9.9	316SS	CG	P
18.29	0.720	65712S	80.00	3.150	15.49	0.610	0.75	4.273	40.49	1.594	30.27	6.811	15.62	0.615	1.40	0.055	11.2	316SS	CG	P
18.29	0.720	65763S	22.00	0.866	14.23	0.560	12.16	69.506	7.11	0.280	86.50	19.462	9.78	0.385	2.03	0.080	4.8	316SS	CG	P
18.29	0.720	65764S	25.00	0.984	14.23	0.560	10.42	59.546	8.31	0.327	86.54	19.472	10.72	0.422	2.03	0.080	5.3	316SS	CG	P
18.29	0.720	65765S	30.00	1.181	14.23	0.560	8.42	48.107	10.26	0.404	86.38	19.435	12.32	0.485	2.03	0.080	6.1	316SS	CG	P
18.29	0.720	65766S	35.00	1.378	14.23	0.560	7.06	40.354	12.24	0.482	86.45	19.451	13.89	0.547	2.03	0.080	6.8	316SS	CG	P
18.29	0.720	65767S	40.00	1.575	14.23	0.560	6.08	34.753	14.22	0.560	86.50	19.462	15.49	0.610	2.03	0.080	7.6	316SS	CG	P
18.29	0.720	65768S	45.00	1.772	14.23	0.560	5.34	30.518	16.21	0.638	86.53	19.470	17.07	0.672	2.03	0.080	8.4	316SS	CG	P
18.29	0.720	65769S	50.00	1.969	14.23	0.560	4.75	27.164	18.19	0.716	86.44	19.449	18.67	0.735	2.03	0.080	9.2	316SS	CG	P
18.29	0.720	65770S	55.00	2.165	14.23	0.560	4.29	24.506	20.17	0.794	86.48	19.458	20.27	0.798	2.03	0.080	10.0	316SS	CG	P
18.29	0.720	65771S	60.00	2.362	14.23	0.560	3.90	22.296	22.17	0.873	86.51	19.464	21.87	0.861	2.03	0.080	10.8	316SS	CG	P
18.29	0.720	65772S	65.00	2.559	14.23	0.560	3.59	20.494	24.11	0.949	86.44	19.449	23.42	0.922	2.03	0.080	11.5	316SS	CG	P
18.29	0.720	65773S	70.00	2.756	14.23	0.560	3.37	19.281	25.63	1.009	86.47	19.455	24.64	0.970	2.03	0.080	12.1	316SS	CG	P
18.29	0.720	65774S	80.00	3.150	14.23	0.560	2.88	16.482	29.97	1.180	86.44	19.449	28.14	1.108	2.03	0.080	13.9	316SS	CG	P
18.29	0.720	65775S	90.00	3.543	14.23	0.560	2.55	14.576	33.91	1.335	86.48	19.459	31.29	1.232	2.03	0.080	15.4	316SS	CG	P
18.29	0.720	65776S	100.00	3.937	14.23	0.560	2.27	12.995	38.02	1.497	86.46	19.454	34.60	1.362	2.03	0.080	17.0	316SS	CG	P
18.35	0.722	50557S	20.00	0.787	12.25	0.482	69.46	396.630	3.77	0.148	261.73	58.838	15.25	0.600	3.05	0.120	5.0	316SS	CG	P
18.35	0.722	50558S	30.00	1.181	12.25	0.482	40.86	233.320	6.41	0.252	261.71	58.834	21.66	0.853	3.05	0.120	7.1	316SS	CG	P
18.35	0.722	50559S	40.00	1.575	12.25	0.482	32.56	185.920	8.04	0.316	261.72	58.836	25.62	1.009	3.05	0.120	8.4	316SS	CG	P
18.35	0.722	50560S	50.00	1.969	12.25	0.482	22.65	129.330	11.56	0.455	261.72	58.837	34.16	1.345	3.05	0.120	11.2	316SS	CG	P
18.35	0.722	50561S	55.00	2.165	12.25	0.482	22.41	127.960	11.68	0.460	261.73	58.838	34.47	1.357	3.05	0.120	11.3	316SS	CG	P
18.35	0.722	50562S	60.00	2.362	12.25	0.482	18.61	106.270	14.06	0.554	261.73	58.840	40.26	1.585	3.05	0.120	13.2	316SS	CG	P
18.35	0.722	50563S	70.00	2.756	12.25	0.482	17.37	99.190	15.07	0.593	261.71	58.836	42.70	1.681	3.05	0.120	14.0	316SS	CG	P
18.35	0.722	50564S	80.00	3.150	12.25	0.482	13.62	77.770	19.22	0.757	261.72	58.837	52.77	2.078	3.05	0.120	17.3	316SS	CG	P
18.35	0.722	50565S	85.00	3.346	12.25	0.482	14.08	80.400	18.59	0.732	261.72	58.837	51.24	2.017	3.05	0.120	16.8	316SS	CG	P
18.43	0.726	50566S	35.00	1.378	14.37	0.566	6.30	35.970	13.63	0.537	85.88	19.305	14.76	0.581	2.03	0.080	7.3	316SS	CG	P
18.43	0.726	50567S	45.00	1.772	14.37	0.566	4.70	26.840	18.27	0.719	85.87	19.305	18.41	0.725	2.03	0.080	9.1	316SS	CG	P
18.43	0.726	50568S	55.00	2.165	14.37	0.566	3.80	21.700	22.60	0.890	85.88	19.306	21.80	0.858	2.03	0.080	10.7	316SS	CG	P
18.43	0.726	50569S	65.00	2.559	14.37	0.566	3.20	18.270	26.84	1.057	85.88	19.305	25.13	0.989	2.03	0.080	12.4	316SS	CG	P
18.43	0.726	50570S	75.00	2.953	14.37	0.566	2.70	15.420	31.81	1.252	85.88	19.306	29.03	1.143	2.03	0.080	14.3	316SS	CG	P
18.43	0.726	50571S	85.00	3.346	14.37	0.566	2.40	13.700	35.78	1.409	85.87	19.305	32.16	1.266	2.03	0.080	15.8	316SS	CG	P
18.43	0.726	50572S	100.00	3.937	14.37	0.566	2.00	11.420	42.94	1.690	85.88	19.306	37.76	1.487	2.03	0.080	18.6	316SS	CG	P
18.50	0.728	50573S	22.00	0.866	13.50	0.531	27.42	156.570	5.47	0.215	149.88	33.694	12.50	0.492	2.50	0.098	5.0	316SS	CG	P
18.50	0.728	50574S	28.00	1.102	13.50	0.531	25.00	142.750	6.00	0.236	149.88	33.693	13.75	0.541	2.50	0.098	5.5	316SS	CG	P
18.50	0.728	50575S	32.00	1.260	13.50	0.531	16.45	93.930	9.11	0.359	149.88	33.693	17.50	0.689	2.50	0.098	7.0	316SS	CG	P
18.50	0.728	50576S	41.00	1.614	13.50	0.531	16.00	91.360	9.37	0.369	149.87	33.693	18.75	0.738	2.50	0.098	7.5	316SS	CG	P
18.50	0.728	50577S	47.00	1.850	13.50	0.531	10.28	58.700	14.58	0.574	149.87	33.693	25.00	0.984	2.50	0.098	10.0	316SS	CG	P
18.50	0.728	50578S	61.00	2.402	13.50	0.531	10.00	57.100	14.99	0.590	149.87	33.692	26.25	1.033	2.50	0.098	10.5	316SS	CG	P
18.50	0.728	50579S	68.00	2.677	13.50	0.531	6.85	39.110	21.88	0.861	149.87	33.692	35.00	1.378	2.50	0.098	14.0	316SS	CG	P
18.50	0.728	50580S	88.00	3.465	13.50	0.531	7.00	39.970	21.41	0.843	149.87	33.692	36.25	1.427	2.50	0.098	14.5	316SS	CG	P
18.50	0.728	50581S	98.00	3.858	13.50	0.531	4.57	26.100	32.80	1.291	149.87	33.693	50.00	1.969	2.50	0.098	20.0	316SS	CG	P
18.50	0.728	50582S	130.00	5.118	13.50	0.531	4.70	26.840	31.89	1.255	149.87	33.692	51.25	2.018	2.50	0.098	20.5	316SS	CG	P
19.18	0.755	50583S	23.00	0.906	12.82	0.505	71.78	409.870	3.75	0.148	269.32	60.545	15.90	0.626	3.18	0.125	5.0	316SS	CG	P
19.18	0.755	50584S	28.00	1.102	12.82	0.505	67.00	382.580	4.02	0.158	269.34	60.550	16.57	0.652	3.18	0.125	5.2	316SS	CG	P
19.18	0.755	50585S	33.00	1.299	12.82	0.505	43.07	245.940	6.25	0.246	269.32	60.545	22.26	0.876	3.18	0.125	7.0	316SS	CG	P
19.18	0.755	50586S	40.00	1.575	12.82	0.505	42.00	239.830	6.41	0.252	269.35	60.551	22.67	0.893	3.18	0.125	7.1	316SS	CG	P
19.18	0.755	50587S	48.00	1.890	12.82	0.505	26.92	153.720	10.01	0.394	269.34	60.549	31.80	1.252	3.18	0.125	10.0	316SS	CG	P
19.18	0.755	50588S	59.00	2.323	12.82	0.505	27.00	154.170	9.98	0.393	269.33	60.547	31.74	1.250	3.18	0.125	10.0	316SS	CG	P
19.18	0.755	50589S	68.00	2.677	12.82	0.505	17.94	102.440	15.01	0.591	269.33	60.549	44.52	1.753	3.18	0.125	14.0	316SS	CG	P
19.18	0.755	50590S	84.00	3.307	12.82	0.505	19.00	108.490	14.18	0.558	269.33	60.547	42.39	1.669	3.18	0.125	13.3	316SS	CG	P
19.18	0.755	50591S	98.00	3.858	12.82	0.505	11.96	68.290	22.52	0.887	269.33	60.547	63.60	2.504	3.18	0.125	20.0	316SS	CG	P
19.18	0.755	50592S	120.00	4.724	12.82	0.505	13.00	74.230	20.72	0.816	269.33	60.549	59.02	2.324	3.18	0.				




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Mat'l	Ends	Finish								
20.43	0.804	50619S	20.00	0.787	16.37	0.644	11.00	62.810	7.09	0.279	77.94	17.520	8.40	0.331	2.03	0.080	4.1	316 SS	CG	P
20.43	0.804	50620S	30.00	1.181	16.37	0.644	6.60	37.690	11.81	0.465	77.94	17.521	11.29	0.444	2.03	0.080	5.6	316 SS	CG	P
20.43	0.804	50621S	40.00	1.575	16.37	0.644	4.60	26.270	16.94	0.667	77.94	17.521	14.43	0.568	2.03	0.080	7.1	316 SS	CG	P
20.43	0.804	50622S	50.00	1.969	16.37	0.644	3.60	20.560	21.65	0.852	77.94	17.522	17.32	0.682	2.03	0.080	8.5	316 SS	CG	P
20.43	0.804	50623S	60.00	2.362	16.37	0.644	2.90	16.560	26.88	1.058	77.94	17.522	20.52	0.808	2.03	0.080	10.1	316 SS	CG	P
20.43	0.804	50624S	70.00	2.756	16.37	0.644	2.50	14.280	31.18	1.227	77.94	17.522	23.14	0.911	2.03	0.080	11.4	316 SS	CG	P
20.43	0.804	50625S	80.00	3.150	16.37	0.644	2.10	11.990	37.11	1.461	77.94	17.521	26.80	1.055	2.03	0.080	13.2	316 SS	CG	P
20.43	0.804	50626S	90.00	3.543	16.37	0.644	1.90	10.850	41.02	1.615	77.94	17.522	29.17	1.148	2.03	0.080	14.4	316 SS	CG	P
20.45	0.805	50627S	25.00	0.984	14.35	0.565	40.48	231.150	5.87	0.231	237.78	53.455	16.78	0.661	3.05	0.120	5.5	316 SS	CG	P
20.45	0.805	50628S	35.00	1.378	14.35	0.565	26.24	149.830	9.06	0.357	237.79	53.457	22.57	0.889	3.05	0.120	7.4	316 SS	CG	P
20.45	0.805	50629S	45.00	1.772	14.35	0.565	21.80	124.480	10.91	0.429	237.79	53.458	25.93	1.021	3.05	0.120	8.5	316 SS	CG	P
20.45	0.805	50630S	55.00	2.165	14.35	0.565	15.74	89.880	15.11	0.595	237.78	53.456	33.55	1.321	3.05	0.120	11.0	316 SS	CG	P
20.45	0.805	50631S	60.00	2.362	14.35	0.565	15.74	89.880	15.11	0.595	237.78	53.456	33.55	1.321	3.05	0.120	11.0	316 SS	CG	P
20.45	0.805	50632S	65.00	2.559	14.35	0.565	13.00	74.230	18.29	0.720	237.78	53.456	39.35	1.549	3.05	0.120	12.9	316 SS	CG	P
20.45	0.805	50633S	75.00	2.953	14.35	0.565	12.32	70.350	19.30	0.760	237.79	53.457	41.18	1.621	3.05	0.120	13.5	316 SS	CG	P
20.45	0.805	50634S	75.00	2.953	14.35	0.565	11.07	63.210	21.48	0.846	237.78	53.456	45.14	1.777	3.05	0.120	14.8	316 SS	CG	P
20.45	0.805	50635S	85.00	3.346	14.35	0.565	9.77	55.790	24.34	0.958	237.78	53.456	50.33	1.981	3.05	0.120	16.5	316 SS	CG	P
20.45	0.805	50636S	90.00	3.543	14.35	0.565	10.12	57.790	23.50	0.925	237.78	53.455	48.80	1.921	3.05	0.120	16.0	316 SS	CG	P
21.40	0.843	50637S	25.00	0.984	16.40	0.646	16.10	91.930	8.14	0.320	131.04	29.459	12.75	0.502	2.50	0.098	5.1	316 SS	CG	P
21.40	0.843	50638S	35.00	1.378	16.40	0.646	10.18	58.130	12.87	0.507	131.05	29.461	17.25	0.679	2.50	0.098	6.9	316 SS	CG	P
21.40	0.843	50639S	45.00	1.772	16.40	0.646	7.92	45.220	16.55	0.651	131.04	29.460	20.75	0.817	2.50	0.098	8.3	316 SS	CG	P
21.40	0.843	50640S	55.00	2.165	16.40	0.646	6.32	36.090	20.74	0.816	131.05	29.460	24.75	0.974	2.50	0.098	9.9	316 SS	CG	P
21.40	0.843	50641S	65.00	2.559	16.40	0.646	5.25	29.980	24.96	0.983	131.05	29.460	28.75	1.132	2.50	0.098	11.5	316 SS	CG	P
21.40	0.843	50642S	75.00	2.953	16.40	0.646	4.54	25.920	28.87	1.136	131.05	29.461	32.50	1.280	2.50	0.098	13.0	316 SS	CG	P
21.40	0.843	50643S	85.00	3.346	16.40	0.646	3.93	22.440	33.35	1.313	131.05	29.460	36.75	1.447	2.50	0.098	14.7	316 SS	CG	P
21.40	0.843	50644S	100.00	3.937	16.40	0.646	3.33	19.010	39.35	1.549	131.05	29.460	42.50	1.673	2.50	0.098	17.0	316 SS	CG	P
21.46	0.845	50645S	20.00	0.787	14.34	0.565	96.62	551.710	3.50	0.138	337.69	75.915	16.02	0.631	3.56	0.140	4.5	316 SS	CG	P
21.46	0.845	50646S	30.00	1.181	14.34	0.565	57.51	328.390	5.87	0.231	337.70	75.918	22.07	0.869	3.56	0.140	6.2	316 SS	CG	P
21.46	0.845	50647S	40.00	1.575	14.34	0.565	40.26	229.890	8.39	0.330	337.70	75.918	28.48	1.121	3.56	0.140	8.0	316 SS	CG	P
21.46	0.845	50648S	50.00	1.969	14.34	0.565	30.97	176.840	10.90	0.429	337.70	75.917	34.89	1.374	3.56	0.140	9.8	316 SS	CG	P
21.46	0.845	50649S	60.00	2.362	14.34	0.565	25.16	143.670	13.42	0.528	337.70	75.918	41.30	1.626	3.56	0.140	11.6	316 SS	CG	P
21.46	0.845	50650S	65.00	2.559	14.34	0.565	24.90	142.180	13.56	0.534	337.72	75.922	41.65	1.640	3.56	0.140	11.7	316 SS	CG	P
21.46	0.845	50651S	70.00	2.756	14.34	0.565	21.19	121.000	15.94	0.627	337.71	75.919	47.70	1.878	3.56	0.140	13.4	316 SS	CG	P
21.46	0.845	50652S	80.00	3.150	14.34	0.565	18.58	106.090	18.18	0.716	337.71	75.920	53.40	2.102	3.56	0.140	15.0	316 SS	CG	P
21.46	0.845	50653S	90.00	3.543	14.34	0.565	16.21	92.560	20.83	0.820	337.70	75.919	60.16	2.369	3.56	0.140	16.9	316 SS	CG	P
21.46	0.845	50654S	100.00	3.937	14.34	0.565	15.48	88.390	21.82	0.859	337.71	75.921	62.66	2.467	3.56	0.140	17.6	316 SS	CG	P
21.60	0.850	50655S	33.00	1.299	18.40	0.724	2.36	13.480	15.87	0.625	37.44	8.418	8.00	0.315	1.60	0.063	5.0	316 SS	CG	P
21.60	0.850	50656S	48.00	1.890	18.40	0.724	2.10	11.990	17.83	0.702	37.44	8.418	8.80	0.346	1.60	0.063	5.5	316 SS	CG	P
21.60	0.850	50657S	51.00	2.008	18.40	0.724	1.41	8.050	26.56	1.045	37.44	8.418	11.20	0.441	1.60	0.063	7.0	316 SS	CG	P
21.60	0.850	50658S	74.00	2.913	18.40	0.724	1.40	7.990	26.75	1.053	37.44	8.418	12.00	0.472	1.60	0.063	7.5	316 SS	CG	P
21.60	0.850	50659S	77.00	3.031	18.40	0.724	0.88	5.020	42.55	1.675	37.44	8.418	16.00	0.630	1.60	0.063	10.0	316 SS	CG	P
21.60	0.850	50660S	110.00	4.331	18.40	0.724	0.88	5.020	42.55	1.675	37.44	8.418	16.80	0.661	1.60	0.063	10.5	316 SS	CG	P
21.60	0.850	50661S	112.00	4.409	18.40	0.724	0.59	3.370	63.46	2.499	37.44	8.418	22.40	0.882	1.60	0.063	14.0	316 SS	CG	P
21.60	0.850	50662S	165.00	6.496	18.40	0.724	0.60	3.430	62.41	2.457	37.44	8.418	23.20	0.913	1.60	0.063	14.5	316 SS	CG	P
21.60	0.850	50663S	165.00	6.496	18.40	0.724	0.39	2.230	96.01	3.780	37.44	8.418	32.00	1.260	1.60	0.063	20.0	316 SS	CG	P
21.60	0.850	50664S	240.00	9.449	18.40	0.724	0.40	2.280	93.61	3.685	37.44	8.418	32.80	1.291	1.60	0.063	20.5	316 SS	CG	P
22.03	0.867	50665S	29.00	1.142	17.97	0.707	6.10	34.830	11.90	0.468	72.56	16.312	10.15	0.400	2.03	0.080	5.0	316 SS	CG	P
22.03	0.867	50666S	41.00	1.614	17.97	0.707	5.20	29.690	13.95	0.549	72.56	16.312	11.21	0.441	2.03	0.080	5.5	316 SS	CG	P
22.03	0.867	50667S	62.00	2.441	17.97	0.707	3.30	18.840	21.99	0.866	72.56	16.312	15.33	0.604	2.03	0.080	7.6	316 SS	CG	P
22.03	0.867	50668S	94.00	3.701	17.97	0.707	2.10	11.990	34.55	1.360	72.56	16.312	21.76	0.857	2.03	0.080	10.7	316 SS	CG	P
22.03	0.867	50669S	135.00	5.315	17.97	0.707	1.50	8.570	48.37	1.904	72.56	16.312	28.85	1.136	2.03	0.080	14.2	316 SS	CG	P
22.03	0.867	50670S	142.00	5.591	17.97	0.707	1.02	5.820	71.14	2.801	72.56	16.312	40.60	1.598	2.03	0.080	20.0	316 SS		




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Def. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends	Finish									
22.45	0.884	50697S	60.00	2.362	16.35	0.644	11.62	66.350	18.81	0.740	218.55	49.132	32.94	1.297	3.05	0.120	10.8	316SS	CG	P
22.45	0.884	50698S	70.00	2.756	16.35	0.644	9.83	56.130	22.23	0.875	218.55	49.132	37.82	1.489	3.05	0.120	12.4	316SS	CG	P
22.45	0.884	50699S	80.00	3.150	16.35	0.644	8.45	48.250	25.86	1.018	218.55	49.132	43.01	1.693	3.05	0.120	14.1	316SS	CG	P
22.45	0.884	50700S	90.00	3.543	16.35	0.644	7.46	42.600	29.30	1.153	218.55	49.132	47.89	1.885	3.05	0.120	15.7	316SS	CG	P
22.50	0.886	50701S	27.00	1.063	17.50	0.689	14.04	80.170	8.91	0.351	125.05	28.113	12.50	0.492	2.50	0.098	5.0	316SS	CG	P
22.50	0.886	50702S	36.00	1.417	17.50	0.689	13.00	74.230	9.62	0.379	125.06	28.115	13.75	0.541	2.50	0.098	5.5	316SS	CG	P
22.50	0.886	50703S	54.00	2.126	17.50	0.689	8.10	46.250	15.44	0.608	125.06	28.114	18.75	0.738	2.50	0.098	7.5	316SS	CG	P
22.50	0.886	50704S	82.00	3.228	17.50	0.689	5.20	29.690	24.05	0.947	125.06	28.113	26.25	1.033	2.50	0.098	10.5	316SS	CG	P
22.50	0.886	50705S	87.00	3.425	17.50	0.689	3.51	20.040	35.63	1.403	125.06	28.114	35.00	1.378	2.50	0.098	14.0	316SS	CG	P
22.50	0.886	50706S	120.00	4.724	17.50	0.689	3.60	20.560	34.74	1.368	125.06	28.114	36.25	1.427	2.50	0.098	14.5	316SS	CG	P
22.50	0.886	50707S	128.00	5.039	17.50	0.689	2.34	13.360	53.44	2.104	125.06	28.114	50.00	1.969	2.50	0.098	20.0	316SS	CG	P
22.50	0.886	50708S	175.00	6.890	17.50	0.689	2.40	13.700	52.11	2.051	125.06	28.114	51.25	2.018	2.50	0.098	20.5	316SS	CG	P
23.18	0.913	50709S	27.00	1.063	16.82	0.662	36.75	209.850	6.19	0.244	227.41	51.124	15.90	0.626	3.18	0.125	5.0	316SS	CG	P
23.18	0.913	50710S	34.00	1.339	16.82	0.662	34.00	194.150	6.69	0.263	227.39	51.120	16.66	0.656	3.18	0.125	5.2	316SS	CG	P
23.18	0.913	50711S	39.00	1.535	16.82	0.662	22.05	125.910	10.31	0.406	227.40	51.122	22.26	0.876	3.18	0.125	7.0	316SS	CG	P
23.18	0.913	50712S	50.00	1.969	16.82	0.662	22.00	125.620	10.34	0.407	227.41	51.125	22.29	0.878	3.18	0.125	7.0	316SS	CG	P
23.18	0.913	50713S	58.00	2.283	16.82	0.662	13.78	78.690	16.50	0.650	227.40	51.121	31.80	1.252	3.18	0.125	10.0	316SS	CG	P
23.18	0.913	50714S	74.00	2.913	16.82	0.662	14.00	79.940	16.24	0.639	227.40	51.122	31.39	1.236	3.18	0.125	9.9	316SS	CG	P
23.18	0.913	50715S	82.00	3.228	16.82	0.662	9.19	52.480	24.75	0.974	227.41	51.123	44.52	1.753	3.18	0.125	14.0	316SS	CG	P
23.18	0.913	50716S	105.00	4.134	16.82	0.662	9.60	54.820	23.69	0.933	227.41	51.123	42.87	1.688	3.18	0.125	13.5	316SS	CG	P
23.18	0.913	50717S	120.00	4.724	16.82	0.662	6.12	34.950	37.16	1.463	227.40	51.122	63.60	2.504	3.18	0.125	20.0	316SS	CG	P
23.18	0.913	50718S	155.00	6.102	16.82	0.662	6.50	37.120	34.99	1.377	227.40	51.122	60.29	2.374	3.18	0.125	19.0	316SS	CG	P
23.40	0.921	50719S	20.00	0.787	18.40	0.724	19.42	110.890	6.21	0.244	120.54	27.098	9.75	0.384	2.50	0.098	3.9	316SS	CG	P
23.40	0.921	50720S	30.00	1.181	18.40	0.724	11.18	63.840	10.78	0.424	120.54	27.099	13.25	0.522	2.50	0.098	5.3	316SS	CG	P
23.40	0.921	50721S	40.00	1.575	18.40	0.724	7.85	44.820	15.36	0.605	120.55	27.100	16.75	0.659	2.50	0.098	6.7	316SS	CG	P
23.40	0.921	50722S	50.00	1.969	18.40	0.724	6.15	35.120	19.60	0.772	120.54	27.098	20.00	0.787	2.50	0.098	8.0	316SS	CG	P
23.40	0.921	50723S	60.00	2.362	18.40	0.724	4.92	28.090	24.50	0.965	120.55	27.100	23.75	0.935	2.50	0.098	9.5	316SS	CG	P
23.40	0.921	50724S	70.00	2.756	18.40	0.724	4.15	23.700	29.05	1.144	120.55	27.100	27.25	1.073	2.50	0.098	10.9	316SS	CG	P
23.40	0.921	50725S	80.00	3.150	18.40	0.724	3.62	20.670	33.30	1.311	120.54	27.099	30.50	1.201	2.50	0.098	12.2	316SS	CG	P
23.40	0.921	50726S	90.00	3.543	18.40	0.724	3.18	18.160	37.91	1.492	120.54	27.099	34.00	1.339	2.50	0.098	13.6	316SS	CG	P
23.46	0.924	50727S	25.00	0.984	16.34	0.643	58.60	334.610	5.33	0.210	312.16	70.177	17.80	0.701	3.56	0.140	5.0	316SS	CG	P
23.46	0.924	50728S	35.00	1.378	16.34	0.643	38.22	218.240	8.17	0.322	312.14	70.173	23.50	0.925	3.56	0.140	6.6	316SS	CG	P
23.46	0.924	50729S	45.00	1.772	16.34	0.643	28.35	161.880	11.01	0.433	312.13	70.171	29.19	1.149	3.56	0.140	8.2	316SS	CG	P
23.46	0.924	50730S	55.00	2.165	16.34	0.643	22.25	127.050	14.03	0.552	312.15	70.173	35.24	1.387	3.56	0.140	9.9	316SS	CG	P
23.46	0.924	50731S	65.00	2.559	16.34	0.643	18.50	105.640	16.87	0.664	312.13	70.170	40.94	1.612	3.56	0.140	11.5	316SS	CG	P
23.46	0.924	50732S	75.00	2.953	16.34	0.643	15.84	90.450	19.71	0.776	312.13	70.169	46.64	1.836	3.56	0.140	13.1	316SS	CG	P
23.46	0.924	50733S	85.00	3.346	16.34	0.643	13.95	79.660	22.38	0.881	312.13	70.170	51.98	2.046	3.56	0.140	14.6	316SS	CG	P
23.46	0.924	50734S	100.00	3.937	16.34	0.643	11.64	66.470	26.82	1.056	312.14	70.171	60.88	2.397	3.56	0.140	17.1	316SS	CG	P
24.00	0.945	50735S	28.00	1.102	16.00	0.630	92.00	525.330	4.53	0.178	416.48	93.629	20.00	0.787	4.00	0.157	5.0	316SS	CG	P
24.00	0.945	50736S	34.00	1.339	16.00	0.630	83.00	473.940	5.02	0.198	416.49	93.632	22.00	0.866	4.00	0.157	5.5	316SS	CG	P
24.00	0.945	50737S	40.00	1.575	16.00	0.630	55.20	315.200	7.55	0.297	416.54	93.642	28.00	1.102	4.00	0.157	7.0	316SS	CG	P
24.00	0.945	50738S	49.00	1.929	16.00	0.630	53.00	302.640	7.86	0.309	416.53	93.639	30.00	1.181	4.00	0.157	7.5	316SS	CG	P
24.00	0.945	50739S	59.00	2.323	16.00	0.630	34.50	197.000	12.07	0.475	416.52	93.637	40.00	1.575	4.00	0.157	10.0	316SS	CG	P
24.00	0.945	50740S	72.00	2.835	16.00	0.630	34.00	194.150	12.25	0.482	416.53	93.641	42.00	1.654	4.00	0.157	10.5	316SS	CG	P
24.00	0.945	50741S	83.00	3.268	16.00	0.630	23.00	131.330	18.11	0.713	416.51	93.635	56.00	2.205	4.00	0.157	14.0	316SS	CG	P
24.00	0.945	50742S	105.00	4.134	16.00	0.630	23.00	131.330	18.11	0.713	416.51	93.635	58.00	2.283	4.00	0.157	14.5	316SS	CG	P
24.00	0.945	50743S	120.00	4.724	16.00	0.630	15.33	87.540	27.17	1.070	416.52	93.637	80.00	3.150	4.00	0.157	20.0	316SS	CG	P
24.00	0.945	50744S	150.00	5.906	16.00	0.630	16.00	91.360	26.03	1.025	416.51	93.636	82.00	3.228	4.00	0.157	20.5	316SS	CG	P
24.40	0.961	50745S	30.00	1.181	16.40	0.646	74.31	424.320	5.53	0.218	410.56	92.298	22.00	0.866	4.00	0.157	5.5	316SS	CG	P
24.40	0.961	50746S	50.00	1.969	16.40	0.646	38.25	218.410	10.73	0.423	410.54	92.292	35.20	1.386	4.00	0.157	8.8	316SS	CG	P
24.40	0.961	50747S	55.00	2.165	16.40	0.646	36.63	209.160	11.21	0.441	410.55	92.295	36.40	1.433	4.00	0.157	9.1	316SS	CG	P
24.40	0.961	50748S	60.00	2.362	16.40	0.646	30.96	176.790	13.26	0.522	410.53	92.291	41.60	1.638	4.					

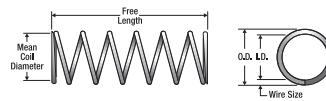


Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils Mat'l	Ends	Finish									
25.40	1.000	50775S	100.00	3.937	20.40	0.803	2.48	14.160	44.99	1.771	111.57	25.083	33.25	1.309	2.50	0.098	13.3	316 SS	CG	P
25.40	1.000	50776S	100.00	3.937	16.40	0.646	27.48	156.910	19.10	0.752	524.90	118.001	72.45	2.852	4.50	0.177	16.1	316 SS	CG	P
25.40	1.000	50777S	120.00	4.724	20.40	0.803	2.05	11.710	54.43	2.143	111.57	25.083	39.25	1.545	2.50	0.098	15.7	316 SS	CG	P
25.40	1.000	50778S	120.00	4.724	16.40	0.646	22.66	129.390	23.16	0.912	524.87	117.996	85.95	3.384	4.50	0.177	19.1	316 SS	CG	P
25.46	1.002	50779S	20.00	0.787	18.34	0.722	69.42	396.400	4.18	0.164	289.97	65.187	13.88	0.546	3.56	0.140	3.9	316 SS	CG	P
25.46	1.002	50780S	30.00	1.181	18.34	0.722	38.79	221.500	7.48	0.294	289.99	65.193	19.22	0.757	3.56	0.140	5.4	316 SS	CG	P
25.46	1.002	50781S	40.00	1.575	18.34	0.722	26.92	153.720	10.77	0.424	289.98	65.191	24.56	0.967	3.56	0.140	6.9	316 SS	CG	P
25.46	1.002	50782S	50.00	1.969	18.34	0.722	20.94	119.570	13.85	0.545	289.98	65.189	29.55	1.163	3.56	0.140	8.3	316 SS	CG	P
25.46	1.002	50783S	60.00	2.362	18.34	0.722	16.91	96.560	17.15	0.675	289.97	65.189	34.89	1.374	3.56	0.140	9.8	316 SS	CG	P
25.46	1.002	50784S	70.00	2.756	18.34	0.722	14.18	80.970	20.45	0.805	289.98	65.190	40.23	1.584	3.56	0.140	11.3	316 SS	CG	P
25.46	1.002	50785S	80.00	3.150	18.34	0.722	12.21	69.720	23.75	0.935	289.98	65.189	45.57	1.794	3.56	0.140	12.8	316 SS	CG	P
25.46	1.002	50786S	90.00	3.543	18.34	0.722	10.90	62.240	26.60	1.047	289.97	65.189	50.20	1.976	3.56	0.140	14.1	316 SS	CG	P
25.46	1.002	50787S	110.00	4.331	18.34	0.722	8.73	49.850	33.22	1.308	289.98	65.189	60.88	2.397	3.56	0.140	17.1	316 SS	CG	P
26.40	1.039	50788S	25.00	0.984	18.40	0.724	78.58	448.700	4.87	0.192	382.92	86.084	18.00	0.709	4.00	0.157	4.5	316 SS	CG	P
26.40	1.039	50789S	35.00	1.378	18.40	0.724	49.11	280.430	7.80	0.307	382.86	86.071	24.00	0.945	4.00	0.157	6.0	316 SS	CG	P
26.40	1.039	50790S	45.00	1.772	18.40	0.724	35.72	203.970	10.72	0.422	382.88	86.076	30.00	1.181	4.00	0.157	7.5	316 SS	CG	P
26.40	1.039	50791S	55.00	2.165	18.40	0.724	28.47	162.570	13.45	0.529	382.89	86.078	35.60	1.402	4.00	0.157	8.9	316 SS	CG	P
26.40	1.039	50792S	65.00	2.559	18.40	0.724	23.67	135.160	16.18	0.637	382.89	86.076	41.20	1.622	4.00	0.157	10.3	316 SS	CG	P
26.40	1.039	50793S	75.00	2.953	18.40	0.724	20.05	114.490	19.10	0.752	382.90	86.078	47.20	1.858	4.00	0.157	11.8	316 SS	CG	P
26.40	1.039	50794S	85.00	3.346	18.40	0.724	17.39	99.300	22.02	0.867	382.89	86.078	53.20	2.094	4.00	0.157	13.3	316 SS	CG	P
26.40	1.039	50795S	100.00	3.937	18.40	0.724	14.66	83.710	26.12	1.028	382.89	86.077	61.60	2.425	4.00	0.157	15.4	316 SS	CG	P
26.40	1.039	50796S	120.00	4.724	18.40	0.724	12.05	68.810	31.78	1.251	382.89	86.077	73.20	2.882	4.00	0.157	18.3	316 SS	CG	P
26.45	1.041	50797S	30.00	1.181	20.35	0.801	19.42	110.890	9.68	0.381	187.89	42.239	15.25	0.600	3.05	0.120	5.0	316 SS	CG	P
26.45	1.041	50798S	40.00	1.575	20.35	0.801	13.55	77.370	13.87	0.546	187.88	42.238	19.22	0.757	3.05	0.120	6.3	316 SS	CG	P
26.45	1.041	50799S	50.00	1.969	20.35	0.801	10.59	60.470	17.74	0.698	187.88	42.236	22.88	0.901	3.05	0.120	7.5	316 SS	CG	P
26.45	1.041	50800S	60.00	2.362	20.35	0.801	8.44	48.190	22.26	0.876	187.88	42.238	27.15	1.069	3.05	0.120	8.9	316 SS	CG	P
26.45	1.041	50801S	70.00	2.756	20.35	0.801	7.19	41.060	26.13	1.029	187.88	42.238	30.81	1.213	3.05	0.120	10.1	316 SS	CG	P
26.45	1.041	50802S	80.00	3.150	20.35	0.801	6.13	35.000	30.65	1.207	187.88	42.237	35.08	1.381	3.05	0.120	11.5	316 SS	CG	P
26.45	1.041	50803S	90.00	3.543	20.35	0.801	5.44	31.060	34.54	1.360	187.88	42.237	38.74	1.525	3.05	0.120	12.7	316 SS	CG	P
26.45	1.041	50804S	110.00	4.331	20.35	0.801	4.38	25.010	42.90	1.689	187.88	42.237	46.67	1.837	3.05	0.120	15.3	316 SS	CG	P
26.45	1.041	50805S	130.00	5.118	20.35	0.801	3.69	21.070	50.92	2.005	187.88	42.237	54.29	2.137	3.05	0.120	17.8	316 SS	CG	P
27.03	1.064	50806S	40.00	1.575	22.97	0.904	3.12	17.820	19.12	0.753	59.66	13.412	10.15	0.400	2.03	0.080	5.0	316 SS	CG	P
27.03	1.064	50807S	58.00	2.283	22.97	0.904	2.70	15.420	22.10	0.870	59.66	13.411	11.10	0.437	2.03	0.080	5.5	316 SS	CG	P
27.03	1.064	50808S	62.00	2.441	22.97	0.904	1.87	10.680	31.90	1.256	59.66	13.411	14.21	0.559	2.03	0.080	7.0	316 SS	CG	P
27.03	1.064	50809S	89.00	3.504	22.97	0.904	1.70	9.710	35.09	1.382	59.66	13.411	15.25	0.600	2.03	0.080	7.5	316 SS	CG	P
27.03	1.064	50810S	94.00	3.701	22.97	0.904	1.17	6.680	50.99	2.007	59.66	13.411	20.30	0.799	2.03	0.080	10.0	316 SS	CG	P
27.03	1.064	50811S	135.00	5.315	22.97	0.904	1.10	6.280	54.23	2.135	59.66	13.411	21.36	0.841	2.03	0.080	10.5	316 SS	CG	P
27.03	1.064	50812S	136.00	5.354	22.97	0.904	0.78	4.450	76.48	3.011	59.66	13.411	28.42	1.119	2.03	0.080	14.0	316 SS	CG	P
27.03	1.064	50813S	195.00	7.677	22.97	0.904	0.75	4.280	79.54	3.132	59.66	13.411	29.44	1.159	2.03	0.080	14.5	316 SS	CG	P
27.03	1.064	50814S	200.00	7.874	22.97	0.904	0.49	2.800	121.75	4.793	59.66	13.411	42.63	1.678	2.03	0.080	21.0	316 SS	CG	P
27.03	1.064	50815S	290.00	11.417	22.97	0.904	0.51	2.910	116.98	4.605	59.66	13.411	41.37	1.629	2.03	0.080	20.4	316 SS	CG	P
27.40	1.079	50816S	30.00	1.181	18.40	0.724	95.00	542.460	5.17	0.204	491.53	110.500	22.95	0.904	4.50	0.177	5.1	316 SS	CG	P
27.40	1.079	50817S	40.00	1.575	18.40	0.724	65.45	373.730	7.51	0.296	491.53	110.500	29.25	1.152	4.50	0.177	6.5	316 SS	CG	P
27.40	1.079	50818S	50.00	1.969	18.40	0.724	49.09	280.310	10.01	0.394	491.49	110.491	36.00	1.417	4.50	0.177	8.0	316 SS	CG	P
27.40	1.079	50819S	60.00	2.362	18.40	0.724	39.80	227.260	12.35	0.486	491.49	110.491	42.30	1.665	4.50	0.177	9.4	316 SS	CG	P
27.40	1.079	50820S	70.00	2.756	18.40	0.724	33.47	191.120	14.69	0.578	491.51	110.495	48.60	1.913	4.50	0.177	10.8	316 SS	CG	P
27.40	1.079	50821S	80.00	3.150	18.40	0.724	28.59	163.250	17.19	0.677	491.52	110.498	55.35	2.179	4.50	0.177	12.3	316 SS	CG	P
27.40	1.079	50822S	90.00	3.543	18.40	0.724	25.39	144.980	19.36	0.762	491.50	110.494	61.20	2.409	4.50	0.177	13.6	316 SS	CG	P
27.40	1.079	50823S	110.00	4.331	18.40	0.724	20.31	115.970	24.20	0.953	491.50	110.494	74.25	2.923	4.50	0.177	16.5	316 SS	CG	P
27.40	1.079	50824S	130.00	5.118	18.40	0.724	17.02	97.190	28.88	1.137	491.50	110.495	86.85	3.419	4.50	0.177	19.3	316 SS	CG	P
27.46	1.081	50825S	25.00	0.984	22.50	0.801	44.12	251.930	6.13	0.241	270.63	60.841	15.31	0.603	3.56	0.140	4.3	316 SS	CG	P
27.46	1.081	50826S	35.00	1.378	22.50	0.801	27.43	156.630	9.87	0.388	270.62	6								




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length		I.D.		Rate		Sugg Max. Def. mm Inches	Sugg Max. load N Lbs.	Solid Length		Wire Dia. mm Inches	Total Coils	Ends Mat'l	F nsh			
		mm	Inches	mm	Inches	N/mm	Lbs./In.	mm	Inches	mm	Inches	mm	Inches					
28.40	1.118	50853S	30.00	1.181	20.40	0.803	52.41	299.270	6.84	0.269	358.54	80.602	19.60	0.772	4.00	0.157	4.9	316SS CG P
28.40	1.118	50854S	40.00	1.575	20.40	0.803	35.35	201.850	10.14	0.399	358.56	80.606	25.20	0.992	4.00	0.157	6.3	316SS CG P
28.40	1.118	50855S	60.00	2.362	20.40	0.803	21.71	123.970	16.52	0.650	358.54	80.603	36.00	1.417	4.00	0.157	9.0	316SS CG P
28.40	1.118	50856S	80.00	3.150	20.40	0.803	15.83	90.390	22.65	0.892	358.53	80.602	46.40	1.827	4.00	0.157	11.6	316SS CG P
28.40	1.118	50857S	90.00	3.543	20.40	0.803	13.82	78.910	25.94	1.021	358.55	80.604	52.00	2.047	4.00	0.157	13.0	316SS CG P
28.40	1.118	50858S	110.00	4.331	20.40	0.803	11.18	63.840	32.07	1.263	358.54	80.604	62.40	2.457	4.00	0.157	15.6	316SS CG P
28.40	1.118	50859S	130.00	5.118	20.40	0.803	9.32	53.220	38.47	1.515	358.54	80.603	73.20	2.882	4.00	0.157	18.3	316SS CG P
28.55	1.124	50860S	25.00	0.984	22.45	0.884	21.43	122.370	8.16	0.321	174.91	39.322	12.51	0.493	3.05	0.120	4.1	316SS CG P
28.55	1.124	50861S	35.00	1.378	22.45	0.884	14.07	80.340	12.43	0.489	174.92	39.323	15.86	0.624	3.05	0.120	5.2	316SS CG P
28.55	1.124	50862S	45.00	1.772	22.45	0.884	10.47	59.790	16.71	0.658	174.92	39.324	19.22	0.757	3.05	0.120	6.3	316SS CG P
28.55	1.124	50863S	55.00	2.165	22.45	0.884	8.18	46.710	21.38	0.842	174.92	39.324	22.88	0.901	3.05	0.120	7.5	316SS CG P
28.55	1.124	50864S	65.00	2.559	22.45	0.884	6.82	38.940	25.65	1.010	174.92	39.323	26.23	1.033	3.05	0.120	8.6	316SS CG P
28.55	1.124	50865S	75.00	2.953	22.45	0.884	5.77	32.950	30.32	1.194	174.92	39.323	29.89	1.177	3.05	0.120	9.8	316SS CG P
28.55	1.124	50866S	85.00	3.346	22.45	0.884	5.00	28.550	34.98	1.377	174.92	39.324	33.55	1.321	3.05	0.120	11.0	316SS CG P
28.55	1.124	50867S	100.00	3.937	22.45	0.884	4.21	24.040	41.55	1.636	174.92	39.323	38.74	1.525	3.05	0.120	12.7	316SS CG P
28.55	1.124	50868S	120.00	4.724	22.45	0.884	3.46	19.760	50.56	1.990	174.92	39.324	45.75	1.801	3.05	0.120	15.0	316SS CG P
28.66	1.128	50869S	60.00	2.362	18.14	0.714	81.79	467.030	8.50	0.335	695.54	156.364	43.66	1.719	5.26	0.207	8.3	316SS CG P
28.66	1.128	50870S	75.00	2.953	18.14	0.714	63.62	363.280	10.93	0.430	695.56	156.368	53.13	2.092	5.26	0.207	10.1	316SS CG P
28.66	1.128	50871S	90.00	3.543	18.14	0.714	51.53	294.240	13.50	0.531	695.55	156.366	63.12	2.485	5.26	0.207	12.0	316SS CG P
28.66	1.128	50872S	110.00	4.331	18.14	0.714	41.22	235.370	16.88	0.664	695.59	156.374	76.27	3.003	5.26	0.207	14.5	316SS CG P
29.00	1.142	50873S	33.00	1.299	21.00	0.827	47.10	268.950	7.47	0.294	351.79	79.086	20.00	0.787	4.00	0.157	5.0	316SS CG P
29.00	1.142	50874S	41.00	1.614	21.00	0.827	43.00	245.540	8.18	0.322	351.78	79.084	22.00	0.866	4.00	0.157	5.5	316SS CG P
29.00	1.142	50875S	48.00	1.890	21.00	0.827	28.26	161.370	12.45	0.490	351.81	79.090	28.00	1.102	4.00	0.157	7.0	316SS CG P
29.00	1.142	50876S	61.00	2.402	21.00	0.827	27.00	154.170	13.03	0.513	351.81	79.090	30.00	1.181	4.00	0.157	7.5	316SS CG P
29.00	1.142	50877S	70.00	2.756	21.00	0.827	17.66	100.840	19.92	0.784	351.81	79.089	40.00	1.575	4.00	0.157	10.0	316SS CG P
29.00	1.142	50878S	90.00	3.543	21.00	0.827	18.00	102.780	19.55	0.769	351.81	79.090	42.00	1.654	4.00	0.157	10.5	316SS CG P
29.00	1.142	50879S	100.00	3.937	21.00	0.827	11.78	67.270	29.86	1.176	351.80	79.087	56.00	2.205	4.00	0.157	14.0	316SS CG P
29.00	1.142	50880S	130.00	5.118	21.00	0.827	12.00	68.520	29.32	1.154	351.80	79.089	58.00	2.283	4.00	0.157	14.5	316SS CG P
29.00	1.142	50881S	146.00	5.748	21.00	0.827	7.85	44.820	44.82	1.764	351.81	79.089	80.00	3.150	4.00	0.157	20.0	316SS CG P
29.00	1.142	50882S	185.00	7.283	21.00	0.827	8.10	46.250	43.43	1.710	351.80	79.088	82.00	3.228	4.00	0.157	20.5	316SS CG P
29.40	1.157	50883S	35.00	1.378	20.40	0.803	65.46	373.790	7.06	0.278	461.82	103.821	24.75	0.974	4.50	0.177	5.5	316SS CG P
29.40	1.157	50884S	45.00	1.772	20.40	0.803	47.73	272.550	9.68	0.381	461.84	103.825	30.60	1.205	4.50	0.177	6.8	316SS CG P
29.40	1.157	50885S	55.00	2.165	20.40	0.803	36.95	210.990	12.50	0.492	461.84	103.825	36.90	1.453	4.50	0.177	8.2	316SS CG P
29.40	1.157	50886S	65.00	2.559	20.40	0.803	30.55	174.440	15.12	0.595	461.82	103.822	42.75	1.683	4.50	0.177	9.5	316SS CG P
29.40	1.157	50887S	75.00	2.953	20.40	0.803	26.03	148.640	17.74	0.699	461.82	103.822	48.60	1.913	4.50	0.177	10.8	316SS CG P
29.40	1.157	50888S	85.00	3.346	20.40	0.803	22.68	129.510	20.36	0.802	461.83	103.824	54.45	2.144	4.50	0.177	12.1	316SS CG P
29.40	1.157	50889S	100.00	3.937	20.40	0.803	18.93	108.090	24.40	0.961	461.84	103.825	63.45	2.498	4.50	0.177	14.1	316SS CG P
29.40	1.157	50890S	120.00	4.724	20.40	0.803	15.58	88.960	29.64	1.167	461.84	103.825	75.15	2.959	4.50	0.177	16.7	316SS CG P
29.56	1.164	50891S	30.00	1.181	22.44	0.883	29.19	166.680	8.66	0.341	252.84	56.842	16.73	0.659	3.56	0.140	4.7	316SS CG P
29.56	1.164	50892S	40.00	1.575	22.44	0.883	20.21	115.400	12.51	0.493	252.85	56.842	21.00	0.827	3.56	0.140	5.9	316SS CG P
29.56	1.164	50893S	50.00	1.969	22.44	0.883	15.45	88.220	16.37	0.644	252.86	56.844	25.28	0.995	3.56	0.140	7.1	316SS CG P
29.56	1.164	50894S	60.00	2.362	22.44	0.883	12.51	71.430	20.21	0.796	252.85	56.843	29.55	1.163	3.56	0.140	8.3	316SS CG P
29.56	1.164	50895S	70.00	2.756	22.44	0.883	10.51	60.010	24.06	0.947	252.85	56.843	33.82	1.331	3.56	0.140	9.5	316SS CG P
29.56	1.164	50896S	80.00	3.150	22.44	0.883	9.06	51.730	27.91	1.099	252.85	56.842	38.09	1.500	3.56	0.140	10.7	316SS CG P
29.56	1.164	50897S	90.00	3.543	22.44	0.883	7.96	45.450	31.77	1.251	252.85	56.843	42.36	1.668	3.56	0.140	11.9	316SS CG P
29.56	1.164	50898S	110.00	4.331	22.44	0.883	6.41	36.600	39.45	1.553	252.85	56.843	50.91	2.004	3.56	0.140	14.3	316SS CG P
29.56	1.164	50899S	130.00	5.118	22.44	0.883	5.40	30.830	46.82	1.843	252.85	56.843	59.10	2.327	3.56	0.140	16.6	316SS CG P
30.16	1.187	50900S	34.00	1.339	19.64	0.773	142.56	814.040	4.67	0.184	665.90	149.700	26.30	1.035	5.26	0.207	5.0	316SS CG P
30.16	1.187	50901S	41.00	1.614	19.64	0.773	122.19	697.720	5.45	0.215	665.94	149.708	28.93	1.139	5.26	0.207	5.5	316SS CG P
30.16	1.187	50902S	49.00	1.929	19.64	0.773	85.53	488.390	7.79	0.307	665.94	149.709	36.82	1.450	5.26	0.207	7.0	316SS CG P
30.16	1.187	50903S	60.00	2.362	19.64	0.773	77.76	444.020	8.56	0.337	665.94	149.709	39.45	1.553	5.26	0.207	7.5	316SS CG P
30.16	1.187	50904S	88.00	3.465	19.64	0.773	50.31	287.280	13.24	0.521	665.90	149.701	55.23	2.174	5.26	0.207	10.5	316SS CG P
30.16	1.187	50905S	102.00	4.016	19.64	0.773	35.64	203.510	18.68	0.736	665.90</td							




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Mat'l	Ends	Finish								
31.50	1.240	50931S	50.00	1.969	22.50	0.886	35.23	201.170	12.32	0.485	434.10	97.591	31.95	1.258	4.50	0.177	7.1	316 SS	CG	P
31.50	1.240	50932S	60.00	2.362	22.50	0.886	28.52	162.850	15.22	0.599	434.10	97.590	37.35	1.470	4.50	0.177	8.3	316 SS	CG	P
31.50	1.240	50933S	70.00	2.756	22.50	0.886	23.96	136.820	18.12	0.713	434.11	97.591	42.75	1.683	4.50	0.177	9.5	316 SS	CG	P
31.50	1.240	50934S	80.00	3.150	22.50	0.886	20.42	116.600	21.26	0.837	434.11	97.592	48.60	1.913	4.50	0.177	10.8	316 SS	CG	P
31.50	1.240	50935S	90.00	3.543	22.50	0.886	17.97	102.610	24.16	0.951	434.10	97.590	54.00	2.126	4.50	0.177	12.0	316 SS	CG	P
31.50	1.240	50936S	110.00	4.331	22.50	0.886	14.49	82.740	29.96	1.179	434.11	97.591	64.80	2.551	4.50	0.177	14.4	316 SS	CG	P
31.50	1.240	50937S	130.00	5.118	22.50	0.886	12.14	69.320	35.76	1.408	434.10	97.590	75.60	2.976	4.50	0.177	16.8	316 SS	CG	P
31.55	1.242	50938S	30.00	1.181	25.45	1.002	15.35	87.650	10.37	0.408	159.18	35.785	12.51	0.493	3.05	0.120	4.1	316 SS	CG	P
31.55	1.242	50939S	40.00	1.575	25.45	1.002	10.40	59.390	15.31	0.603	159.18	35.786	15.56	0.613	3.05	0.120	5.1	316 SS	CG	P
31.55	1.242	50940S	50.00	1.969	25.45	1.002	7.86	44.880	20.25	0.797	159.18	35.785	18.61	0.733	3.05	0.120	6.1	316 SS	CG	P
31.55	1.242	50941S	60.00	2.362	25.45	1.002	6.32	36.090	25.19	0.992	159.18	35.786	21.66	0.853	3.05	0.120	7.1	316 SS	CG	P
31.55	1.242	50942S	70.00	2.756	25.45	1.002	5.29	30.210	30.09	1.185	159.18	35.785	24.71	0.973	3.05	0.120	8.1	316 SS	CG	P
31.55	1.242	50943S	80.00	3.150	25.45	1.002	4.61	26.320	34.53	1.359	159.18	35.786	27.45	1.081	3.05	0.120	9.0	316 SS	CG	P
31.55	1.242	50944S	90.00	3.543	25.45	1.002	4.03	23.010	39.50	1.555	159.18	35.785	30.50	1.201	3.05	0.120	10.0	316 SS	CG	P
31.55	1.242	50945S	110.00	4.331	25.45	1.002	3.22	18.390	49.44	1.946	159.18	35.785	36.60	1.441	3.05	0.120	12.0	316 SS	CG	P
31.55	1.242	50946S	130.00	5.118	25.45	1.002	2.71	15.470	58.74	2.313	159.18	35.785	42.40	1.669	3.05	0.120	13.9	316 SS	CG	P
32.50	1.280	50947S	60.00	2.362	20.50	0.807	111.23	635.140	7.67	0.302	852.69	191.692	44.40	1.748	6.00	0.236	7.4	316 SS	CG	P
32.50	1.280	50948S	75.00	2.953	20.50	0.807	85.81	489.990	9.94	0.391	852.69	191.693	54.00	2.126	6.00	0.236	9.0	316 SS	CG	P
32.50	1.280	50949S	90.00	3.543	20.50	0.807	69.84	398.800	12.21	0.481	852.75	191.705	63.60	2.504	6.00	0.236	10.6	316 SS	CG	P
32.50	1.280	50950S	110.00	4.331	20.50	0.807	55.62	317.600	15.33	0.604	852.71	191.697	76.80	3.024	6.00	0.236	12.8	316 SS	CG	P
32.56	1.282	50951S	25.00	0.984	25.44	1.002	33.41	190.780	6.92	0.272	231.06	51.945	13.17	0.519	3.56	0.140	3.7	316 SS	CG	P
32.56	1.282	50952S	35.00	1.378	25.44	1.002	21.04	120.140	10.98	0.432	231.06	51.945	16.73	0.659	3.56	0.140	4.7	316 SS	CG	P
32.56	1.282	50953S	45.00	1.772	25.44	1.002	14.95	85.370	15.46	0.608	231.05	51.943	20.65	0.813	3.56	0.140	5.8	316 SS	CG	P
32.56	1.282	50954S	55.00	2.165	25.44	1.002	11.83	67.550	19.53	0.769	231.06	51.945	24.21	0.953	3.56	0.140	6.8	316 SS	CG	P
32.56	1.282	50955S	65.00	2.559	25.44	1.002	9.63	54.990	23.99	0.945	231.06	51.945	28.12	1.107	3.56	0.140	7.9	316 SS	CG	P
32.56	1.282	50956S	75.00	2.953	25.44	1.002	8.23	46.990	28.08	1.105	231.06	51.944	31.68	1.247	3.56	0.140	8.9	316 SS	CG	P
32.56	1.282	50957S	85.00	3.346	25.44	1.002	7.10	40.540	32.54	1.281	231.06	51.945	35.60	1.402	3.56	0.140	10.0	316 SS	CG	P
32.56	1.282	50958S	100.00	3.937	25.44	1.002	5.98	34.150	38.64	1.521	231.06	51.945	40.94	1.612	3.56	0.140	11.5	316 SS	CG	P
32.56	1.282	50959S	120.00	4.724	25.44	1.002	4.94	28.210	46.77	1.841	231.06	51.944	48.06	1.892	3.56	0.140	13.5	316 SS	CG	P
32.56	1.282	50960S	140.00	5.512	25.44	1.002	4.18	23.870	55.28	2.176	231.06	51.944	55.54	2.187	3.56	0.140	15.6	316 SS	CG	P
32.76	1.290	50961S	40.00	1.575	22.24	0.876	85.80	489.930	7.22	0.284	619.65	139.302	29.98	1.180	5.26	0.207	5.7	316 SS	CG	P
32.76	1.290	50962S	60.00	2.362	22.24	0.876	52.04	297.160	11.91	0.469	619.59	139.289	42.61	1.678	5.26	0.207	8.1	316 SS	CG	P
32.76	1.290	50963S	80.00	3.150	22.24	0.876	37.35	213.270	16.59	0.653	619.60	139.291	55.23	2.174	5.26	0.207	10.5	316 SS	CG	P
32.76	1.290	50964S	100.00	3.937	22.24	0.876	28.86	164.790	21.47	0.845	619.60	139.291	68.38	2.692	5.26	0.207	13.0	316 SS	CG	P
32.76	1.290	50965S	120.00	4.724	22.24	0.876	23.69	135.270	26.16	1.030	619.61	139.294	81.00	3.189	5.26	0.207	15.4	316 SS	CG	P
32.76	1.290	50966S	140.00	5.512	22.24	0.876	20.09	114.720	30.84	1.214	619.62	139.295	93.63	3.686	5.26	0.207	17.8	316 SS	CG	P
32.76	1.290	50967S	160.00	6.299	22.24	0.876	17.54	100.160	35.33	1.391	619.60	139.292	105.73	4.163	5.26	0.207	20.1	316 SS	CG	P
33.50	1.319	50968S	30.00	1.181	25.50	1.004	37.39	213.500	8.24	0.324	308.13	69.271	17.20	0.677	4.00	0.157	4.3	316 SS	CG	P
33.50	1.319	50969S	40.00	1.575	25.50	1.004	26.06	148.810	11.82	0.466	308.13	69.271	21.20	0.835	4.00	0.157	5.3	316 SS	CG	P
33.50	1.319	50970S	50.00	1.969	25.50	1.004	19.55	111.630	15.76	0.621	308.13	69.270	25.60	1.008	4.00	0.157	6.4	316 SS	CG	P
33.50	1.319	50971S	60.00	2.362	25.50	1.004	15.64	89.310	19.70	0.776	308.12	69.269	30.00	1.181	4.00	0.157	7.5	316 SS	CG	P
33.50	1.319	50972S	70.00	2.756	25.50	1.004	13.03	74.400	23.65	0.931	308.12	69.268	34.40	1.354	4.00	0.157	8.6	316 SS	CG	P
33.50	1.319	50973S	80.00	3.150	25.50	1.004	11.17	63.780	27.59	1.086	308.12	69.269	38.80	1.528	4.00	0.157	9.7	316 SS	CG	P
33.50	1.319	50974S	90.00	3.543	25.50	1.004	9.89	56.470	31.16	1.227	308.12	69.269	42.80	1.685	4.00	0.157	10.7	316 SS	CG	P
33.50	1.319	50975S	110.00	4.331	25.50	1.004	7.89	45.050	39.05	1.537	308.12	69.268	51.60	2.031	4.00	0.157	12.9	316 SS	CG	P
33.50	1.319	50976S	130.00	5.118	25.50	1.004	6.57	37.520	46.90	1.846	308.12	69.268	60.40	2.378	4.00	0.157	15.1	316 SS	CG	P
33.50	1.319	50977S	150.00	5.906	25.50	1.004	5.66	32.320	54.44	2.143	308.12	69.268	68.80	2.709	4.00	0.157	17.2	316 SS	CG	P
34.50	1.358	50978S	35.00	1.378	25.50	1.004	46.78	267.120	8.54	0.336	399.60	89.833	21.60	0.850	4.50	0.177	4.8	316 SS	CG	P
34.50	1.358	50979S	40.00	1.575	22.50	0.886	142.02	810.960	5.71	0.225	810.37	182.178	32.40	1.276	6.00	0.236	5.4	316 SS	CG	P
34.50	1.358	50980S	45.00	1.772	25.50	1.004	33.59	191.800	11.90	0.468	399.59	89.831	26.55	1.045	4.50	0.177	5.9	316 SS	CG	P
34.50	1.358	50981S	51.00	2.008	29.50	1.161	3.43	19.590	24.27	0.956	83.25	18.716	12.50	0.492	2.50	0.098	5.0	316 SS	CG	P
34.50	1.358	50982S	55.00	2.165	25.50	1.004	26.20	149.610	15.25											




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Def. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends Mat'l	En ds	F insh								
35.18	1.385	51009S	89.00	3.504	28.82	1.135	5.30	30.260	29.06	1.144	154.02	34.625	22.51	0.886	3.18	0.125	7.1	316SS	CG	P
35.18	1.385	51010S	101.00	3.976	28.82	1.135	3.36	19.190	45.84	1.805	154.02	34.625	31.80	1.252	3.18	0.125	10.0	316SS	CG	P
35.18	1.385	51011S	135.00	5.315	28.82	1.135	3.40	19.410	45.30	1.783	154.02	34.625	31.55	1.242	3.18	0.125	9.9	316SS	CG	P
35.18	1.385	51012S	147.00	5.787	28.82	1.135	2.24	12.790	68.76	2.707	154.02	34.625	44.52	1.753	3.18	0.125	14.0	316SS	CG	P
35.18	1.385	51013S	190.00	7.480	28.82	1.135	2.30	13.130	66.97	2.636	154.02	34.625	43.57	1.715	3.18	0.125	13.7	316SS	CG	P
35.18	1.385	51014S	215.00	8.465	28.82	1.135	1.50	8.570	102.68	4.042	154.02	34.625	63.60	2.504	3.18	0.125	20.0	316SS	CG	P
35.18	1.385	51015S	280.00	11.024	28.82	1.135	1.60	9.140	96.26	3.790	154.02	34.625	59.85	2.356	3.18	0.125	18.8	316SS	CG	P
35.56	1.400	51016S	30.00	1.181	28.44	1.120	22.25	127.050	9.56	0.376	212.67	47.809	13.88	0.546	3.56	0.140	3.9	316SS	CG	P
35.56	1.400	51017S	40.00	1.575	28.44	1.120	15.10	86.220	14.08	0.554	212.67	47.810	17.09	0.673	3.56	0.140	4.8	316SS	CG	P
35.56	1.400	51018S	50.00	1.969	28.44	1.120	11.43	65.270	18.61	0.733	212.67	47.809	20.29	0.799	3.56	0.140	5.7	316SS	CG	P
35.56	1.400	51019S	60.00	2.362	28.44	1.120	9.19	52.480	23.14	0.911	212.67	47.809	23.50	0.925	3.56	0.140	6.6	316SS	CG	P
35.56	1.400	51020S	70.00	2.756	28.44	1.120	7.69	43.910	27.66	1.089	212.67	47.809	26.70	1.051	3.56	0.140	7.5	316SS	CG	P
35.56	1.400	51021S	80.00	3.150	28.44	1.120	6.61	37.740	32.17	1.267	212.67	47.810	29.90	1.177	3.56	0.140	8.4	316SS	CG	P
35.56	1.400	51022S	90.00	3.543	28.44	1.120	5.79	33.060	36.73	1.446	212.67	47.809	33.11	1.304	3.56	0.140	9.3	316SS	CG	P
35.56	1.400	51023S	110.00	4.331	28.44	1.120	4.65	26.550	45.74	1.801	212.67	47.810	39.52	1.556	3.56	0.140	11.1	316SS	CG	P
35.56	1.400	51024S	130.00	5.118	28.44	1.120	3.91	22.330	54.39	2.141	212.67	47.810	45.57	1.794	3.56	0.140	12.8	316SS	CG	P
35.56	1.400	51025S	150.00	5.906	28.44	1.120	3.36	19.190	63.29	2.492	212.67	47.810	51.98	2.046	3.56	0.140	14.6	316SS	CG	P
35.76	1.408	51026S	30.00	1.181	25.24	0.994	105.77	603.960	5.42	0.213	573.06	128.830	22.09	0.870	5.26	0.207	4.2	316SS	CG	P
35.76	1.408	51027S	50.00	1.969	25.24	0.994	52.89	302.010	10.84	0.427	573.12	128.842	33.66	1.325	5.26	0.207	6.4	316SS	CG	P
35.76	1.408	51028S	70.00	2.756	25.24	0.994	35.26	201.340	16.25	0.640	573.12	128.842	45.24	1.781	5.26	0.207	8.6	316SS	CG	P
35.76	1.408	51029S	90.00	3.543	25.24	0.994	26.44	150.980	21.68	0.853	573.11	128.841	56.81	2.237	5.26	0.207	10.8	316SS	CG	P
35.76	1.408	51030S	110.00	4.331	25.24	0.994	21.15	120.770	27.10	1.067	573.12	128.843	68.38	2.692	5.26	0.207	13.0	316SS	CG	P
35.76	1.408	51031S	130.00	5.118	25.24	0.994	17.63	100.670	32.51	1.280	573.12	128.842	79.95	3.148	5.26	0.207	15.2	316SS	CG	P
35.76	1.408	51032S	150.00	5.906	25.24	0.994	15.21	86.850	37.68	1.483	573.11	128.841	91.00	3.583	5.26	0.207	17.3	316SS	CG	P
36.00	1.417	51033S	41.00	1.614	28.00	1.102	22.46	128.250	12.83	0.505	288.14	64.776	20.00	0.787	4.00	0.157	5.0	316SS	CG	P
36.00	1.417	51034S	54.00	2.126	28.00	1.102	20.00	114.200	14.41	0.567	288.14	64.776	22.00	0.866	4.00	0.157	5.5	316SS	CG	P
36.00	1.417	51035S	61.00	2.402	28.00	1.102	13.48	76.970	21.38	0.842	288.14	64.775	28.00	1.102	4.00	0.157	7.0	316SS	CG	P
36.00	1.417	51036S	80.00	3.150	28.00	1.102	13.00	74.230	22.16	0.873	288.13	64.775	30.00	1.181	4.00	0.157	7.5	316SS	CG	P
36.00	1.417	51037S	91.00	3.583	28.00	1.102	8.42	48.080	34.22	1.347	288.13	64.775	40.00	1.575	4.00	0.157	10.0	316SS	CG	P
36.00	1.417	51038S	120.00	4.724	28.00	1.102	8.40	47.970	34.30	1.350	288.13	64.774	42.00	1.654	4.00	0.157	10.5	316SS	CG	P
36.00	1.417	51039S	131.00	5.157	28.00	1.102	5.62	32.090	51.27	2.018	288.13	64.775	56.00	2.205	4.00	0.157	14.0	316SS	CG	P
36.00	1.417	51040S	170.00	6.693	28.00	1.102	5.70	32.550	50.55	1.990	288.13	64.774	58.00	2.283	4.00	0.157	14.5	316SS	CG	P
36.00	1.417	51041S	191.00	7.520	28.00	1.102	3.74	21.360	77.04	3.033	288.13	64.775	80.00	3.150	4.00	0.157	20.0	316SS	CG	P
36.00	1.417	51042S	250.00	9.843	28.00	1.102	3.90	22.270	73.88	2.909	288.13	64.775	82.00	3.228	4.00	0.157	20.5	316SS	CG	P
36.50	1.437	51043S	35.00	1.378	28.50	1.122	26.80	153.030	10.61	0.418	284.43	63.942	17.60	0.693	4.00	0.157	4.4	316SS	CG	P
36.50	1.437	51044S	45.00	1.772	28.50	1.122	18.92	108.040	15.03	0.592	284.44	63.945	21.60	0.850	4.00	0.157	5.4	316SS	CG	P
36.50	1.437	51045S	55.00	2.165	28.50	1.122	14.96	85.420	19.01	0.749	284.43	63.943	25.20	0.992	4.00	0.157	6.3	316SS	CG	P
36.50	1.437	51046S	65.00	2.559	28.50	1.122	12.14	69.320	23.43	0.922	284.44	63.945	29.20	1.150	4.00	0.157	7.3	316SS	CG	P
36.50	1.437	51047S	75.00	2.953	28.50	1.122	10.37	59.210	27.43	1.080	284.44	63.944	32.80	1.291	4.00	0.157	8.2	316SS	CG	P
36.50	1.437	51048S	85.00	3.346	28.50	1.122	9.06	51.730	31.40	1.236	284.44	63.944	36.40	1.433	4.00	0.157	9.1	316SS	CG	P
36.50	1.437	51049S	100.00	3.937	28.50	1.122	7.57	43.230	37.57	1.479	284.44	63.944	42.00	1.654	4.00	0.157	10.5	316SS	CG	P
36.50	1.437	51050S	120.00	4.724	28.50	1.122	6.18	35.290	46.03	1.812	284.44	63.944	49.60	1.953	4.00	0.157	12.4	316SS	CG	P
36.50	1.437	51051S	140.00	5.512	28.50	1.122	5.23	29.860	54.39	2.141	284.43	63.943	57.20	2.252	4.00	0.157	14.3	316SS	CG	P
36.50	1.437	51052S	160.00	6.299	28.50	1.122	4.53	25.870	62.79	2.472	284.43	63.943	64.80	2.551	4.00	0.157	16.2	316SS	CG	P
37.26	1.467	51053S	41.00	1.614	26.74	1.053	67.16	383.490	8.22	0.324	552.26	124.152	26.30	1.035	5.26	0.207	5.0	316SS	CG	P
37.26	1.467	51054S	51.00	2.008	26.74	1.053	50.00	285.510	11.05	0.435	552.25	124.151	31.72	1.249	5.26	0.207	6.0	316SS	CG	P
37.26	1.467	51055S	51.00	2.008	26.74	1.053	57.57	328.730	9.59	0.378	552.27	124.155	28.93	1.139	5.26	0.207	5.5	316SS	CG	P
37.26	1.467	51056S	59.00	2.323	26.74	1.053	40.30	230.120	13.70	0.540	552.27	124.156	36.82	1.450	5.26	0.207	7.0	316SS	CG	P
37.26	1.467	51057S	75.00	2.953	26.74	1.053	32.00	182.720	17.26	0.679	552.26	124.152	43.66	1.719	5.26	0.207	8.3	316SS	CG	P
37.26	1.467	51058S	75.00	2.953	26.74	1.053	36.63	209.160	15.08	0.594	552.27	124.156	39.45	1.553	5.26	0.207	7.5	316SS	CG	P
37.26	1.467	51059S	88.00	3.465	26.74	1.053	25.19	143.840	21.92	0.863	552.27	124.154	52.60	2.071	5.26	0.207	10.0	316SS	CG	P
37.26	1.467	51060S	110.00	4.331	26.74	1.053	20.00	114.200	27.61</											




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils Mat'l	Ends E n d s	Finish F in sh									
38.35	1.510	51087S	90.00	3.543	25.65	1.010	53.50	305.490	16.26	0.640	869.75	195.528	63.50	2.500	6.35	0.250	10.0	316 SS	CG	P
38.35	1.510	51088S	110.00	4.331	25.65	1.010	50.35	287.510	17.27	0.680	869.75	195.527	66.68	2.625	6.35	0.250	10.5	316 SS	CG	P
38.35	1.510	51089S	128.00	5.039	25.65	1.010	35.66	203.620	24.39	0.960	869.75	195.527	88.90	3.500	6.35	0.250	14.0	316 SS	CG	P
38.35	1.510	51090S	155.00	6.102	25.65	1.010	34.24	195.520	25.40	1.000	869.76	195.521	92.08	3.625	6.35	0.250	14.5	316 SS	CG	P
38.35	1.510	51091S	184.00	7.244	25.65	1.010	34.78	135.790	36.58	1.440	869.75	195.529	127.00	5.000	6.35	0.250	20.0	316 SS	CG	P
38.35	1.510	51092S	225.00	8.858	25.65	1.010	23.13	132.080	37.60	1.480	869.76	195.529	130.18	5.125	6.35	0.250	20.5	316 SS	CG	P
38.50	1.516	51093S	40.00	1.575	30.50	1.201	20.68	118.090	13.08	0.515	270.54	60.819	18.40	0.724	4.00	0.157	4.6	316 SS	CG	P
38.50	1.516	51094S	50.00	1.969	30.50	1.201	15.36	87.710	17.61	0.693	270.54	60.819	22.00	0.866	4.00	0.157	5.5	316 SS	CG	P
38.50	1.516	51095S	60.00	2.362	30.50	1.201	12.50	71.380	21.64	0.852	270.54	60.819	25.20	0.992	4.00	0.157	6.3	316 SS	CG	P
38.50	1.516	51096S	70.00	2.756	30.50	1.201	10.34	59.040	26.16	1.030	270.54	60.819	28.80	1.134	4.00	0.157	7.2	316 SS	CG	P
38.50	1.516	51097S	80.00	3.150	30.50	1.201	8.81	50.310	30.71	1.209	270.53	60.817	32.40	1.276	4.00	0.157	8.1	316 SS	CG	P
38.50	1.516	51098S	90.00	3.543	30.50	1.201	7.68	43.850	35.23	1.387	270.54	60.819	36.00	1.417	4.00	0.157	9.0	316 SS	CG	P
38.50	1.516	51099S	110.00	4.331	30.50	1.201	6.18	35.290	43.78	1.723	270.53	60.818	42.80	1.685	4.00	0.157	10.7	316 SS	CG	P
38.50	1.516	51100S	130.00	5.118	30.50	1.201	5.17	29.520	52.33	2.060	270.53	60.818	49.60	1.953	4.00	0.157	12.4	316 SS	CG	P
38.50	1.516	51101S	150.00	5.906	30.50	1.201	4.41	25.180	61.35	2.415	270.53	60.818	56.80	2.236	4.00	0.157	14.2	316 SS	CG	P
38.85	1.530	51102S	40.00	1.575	26.15	1.030	145.90	833.110	5.89	0.232	859.94	193.321	30.48	1.200	6.35	0.250	4.8	316 SS	CG	P
38.85	1.530	51103S	60.00	2.362	26.15	1.030	85.11	485.990	10.10	0.398	859.95	193.325	43.18	1.700	6.35	0.250	6.8	316 SS	CG	P
38.85	1.530	51104S	80.00	3.150	26.15	1.030	59.20	338.040	14.53	0.572	859.94	193.322	56.52	2.225	6.35	0.250	8.9	316 SS	CG	P
38.85	1.530	51105S	100.00	3.937	26.15	1.030	45.90	262.100	18.74	0.738	859.94	193.322	69.22	2.725	6.35	0.250	10.9	316 SS	CG	P
38.85	1.530	51106S	120.00	4.724	26.15	1.030	37.48	214.020	22.94	0.903	859.94	193.323	81.92	3.225	6.35	0.250	12.9	316 SS	CG	P
38.85	1.530	51107S	140.00	5.512	26.15	1.030	31.67	180.840	27.15	1.069	859.94	193.321	94.62	3.725	6.35	0.250	14.9	316 SS	CG	P
38.85	1.530	51108S	160.00	6.299	26.15	1.030	27.79	158.680	30.94	1.218	859.93	193.321	106.05	4.175	6.35	0.250	16.7	316 SS	CG	P
38.85	1.530	51109S	200.00	7.874	26.15	1.030	21.61	123.400	39.79	1.567	859.95	193.324	132.72	5.225	6.35	0.250	20.9	316 SS	CG	P
39.50	1.555	51110S	40.00	1.575	30.50	1.201	30.55	174.440	11.54	0.454	352.55	79.256	21.15	0.833	4.50	0.177	4.7	316 SS	CG	P
39.50	1.555	51111S	50.00	1.969	30.50	1.201	22.91	130.820	15.39	0.606	352.54	79.254	25.20	0.992	4.50	0.177	5.6	316 SS	CG	P
39.50	1.555	51112S	60.00	2.362	30.50	1.201	18.33	104.670	19.23	0.757	352.54	79.254	29.25	1.152	4.50	0.177	6.5	316 SS	CG	P
39.50	1.555	51113S	70.00	2.756	30.50	1.201	15.00	85.650	23.50	0.925	352.55	79.255	33.75	1.329	4.50	0.177	7.5	316 SS	CG	P
39.50	1.555	51114S	80.00	3.150	30.50	1.201	12.89	73.600	27.35	1.077	352.55	79.257	37.80	1.488	4.50	0.177	8.4	316 SS	CG	P
39.50	1.555	51115S	90.00	3.543	30.50	1.201	11.30	64.520	31.20	1.228	352.55	79.256	41.85	1.648	4.50	0.177	9.3	316 SS	CG	P
39.50	1.555	51116S	110.00	4.331	30.50	1.201	9.06	51.730	38.91	1.532	352.55	79.257	49.95	1.967	4.50	0.177	11.1	316 SS	CG	P
39.50	1.555	51117S	130.00	5.118	30.50	1.201	7.64	43.630	46.15	1.817	352.55	79.256	57.60	2.268	4.50	0.177	12.8	316 SS	CG	P
39.50	1.555	51118S	150.00	5.906	30.50	1.201	6.50	37.120	54.24	2.135	352.55	79.256	66.15	2.604	4.50	0.177	14.7	316 SS	CG	P
40.76	1.605	51119S	40.00	1.575	30.24	1.191	54.66	312.120	9.31	0.366	508.83	114.390	24.72	0.973	5.26	0.207	4.7	316 SS	CG	P
40.76	1.605	51120S	60.00	2.362	30.24	1.191	32.79	187.240	15.52	0.611	508.84	114.391	34.19	1.346	5.26	0.207	6.5	316 SS	CG	P
40.76	1.605	51121S	80.00	3.150	30.24	1.191	23.06	131.680	22.07	0.869	508.84	114.392	44.18	1.739	5.26	0.207	8.4	316 SS	CG	P
40.76	1.605	51122S	100.00	3.937	30.24	1.191	17.78	101.530	28.62	1.127	508.83	114.389	54.18	2.133	5.26	0.207	10.3	316 SS	CG	P
40.76	1.605	51123S	120.00	4.724	30.24	1.191	14.61	83.430	34.83	1.371	508.84	114.391	63.65	2.506	5.26	0.207	12.1	316 SS	CG	P
40.76	1.605	51124S	140.00	5.512	30.24	1.191	12.30	70.230	41.37	1.629	508.83	114.390	73.64	2.899	5.26	0.207	14.0	316 SS	CG	P
40.76	1.605	51125S	160.00	6.299	30.24	1.191	10.69	61.040	47.60	1.874	508.83	114.391	83.11	3.272	5.26	0.207	15.8	316 SS	CG	P
40.76	1.605	51126S	200.00	7.874	30.24	1.191	8.43	48.140	60.36	2.376	508.84	114.391	102.57	4.038	5.26	0.207	19.5	316 SS	CG	P
42.50	1.673	51127S	40.00	1.575	30.50	1.201	85.14	486.160	7.91	0.312	673.71	151.457	28.20	1.110	6.00	0.236	4.7	316 SS	CG	P
42.50	1.673	51128S	60.00	2.362	30.50	1.201	51.08	291.670	13.19	0.519	673.69	151.453	39.00	1.535	6.00	0.236	6.5	316 SS	CG	P
42.50	1.673	51129S	80.00	3.150	30.50	1.201	35.92	205.110	18.76	0.738	673.68	151.449	50.40	1.984	6.00	0.236	8.4	316 SS	CG	P
42.50	1.673	51130S	100.00	3.937	30.50	1.201	27.70	158.170	24.32	0.958	673.69	151.452	61.80	2.433	6.00	0.236	10.3	316 SS	CG	P
42.50	1.673	51131S	120.00	4.724	30.50	1.201	22.76	129.960	29.60	1.165	673.70	151.453	72.60	2.858	6.00	0.236	12.1	316 SS	CG	P
42.50	1.673	51132S	140.00	5.512	30.50	1.201	19.16	109.410	35.16	1.384	673.70	151.455	84.00	3.307	6.00	0.236	14.0	316 SS	CG	P
42.50	1.673	51133S	160.00	6.299	30.50	1.201	16.54	94.450	40.73	1.604	673.69	151.452	95.40	3.756	6.00	0.236	15.9	316 SS	CG	P
42.50	1.673	51134S	200.00	7.874	30.50	1.201	13.14	75.030	51.27	2.019	673.70	151.454	117.00	4.606	6.00	0.236	19.5	316 SS	CG	P
43.18	1.700	51135S	61.00	2.402	36.82	1.450	4.59	26.210	27.57	1.086	126.56	28.451	15.90	0.626	3.18	0.125	5.0	316 SS	CG	P
43.18	1.700	51136S	82.00	3.228	36.82	1.450	4.30	24.550	29.43	1.159	126.56	28.451	16.54	0.651	3.18	0.125	5.2	316 SS	CG	P
43.18	1.700	51137S	93.00	3.661	36.82	1.450	2.76	15.760	45.85	1.805	126.56	28.451	22.26	0.876	3.18	0.125	7.0	316 SS	CG	P
43.18	1.																			




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Def. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils	Ends Mat'l	En ds	F insh								
44.00	1.732	51165S	177.00	6.969	36.00	1.417	2.88	16.450	82.78	3.259	238.40	53.593	56.00	2.205	4.00	0.157	14.0	316SS	CG	P
44.00	1.732	51166S	235.00	9.252	36.00	1.417	2.90	16.560	82.21	3.236	238.40	53.593	58.00	2.283	4.00	0.157	14.5	316SS	CG	P
44.00	1.732	51167S	259.00	10.197	36.00	1.417	1.92	10.960	124.16	4.888	238.40	53.593	80.00	3.150	4.00	0.157	20.0	316SS	CG	P
44.00	1.732	51168S	340.00	13.386	36.00	1.417	2.00	11.420	119.20	4.693	238.40	53.594	82.00	3.228	4.00	0.157	20.5	316SS	CG	P
44.50	1.752	51169S	45.00	1.772	35.50	1.398	22.10	126.190	14.26	0.562	315.23	70.867	20.25	0.797	4.50	0.177	4.5	316SS	CG	P
44.50	1.752	51170S	55.00	2.165	35.50	1.398	16.75	95.640	18.82	0.741	315.24	70.868	23.85	0.939	4.50	0.177	5.3	316SS	CG	P
44.50	1.752	51171S	65.00	2.559	35.50	1.398	13.82	78.910	22.81	0.898	315.23	70.867	27.00	1.063	4.50	0.177	6.0	316SS	CG	P
44.50	1.752	51172S	75.00	2.953	35.50	1.398	11.51	65.720	27.39	1.078	315.22	70.865	30.60	1.205	4.50	0.177	6.8	316SS	CG	P
44.50	1.752	51173S	85.00	3.346	35.50	1.398	10.05	57.390	31.37	1.235	315.23	70.866	33.75	1.329	4.50	0.177	7.5	316SS	CG	P
44.50	1.752	51174S	100.00	3.937	35.50	1.398	8.25	47.110	38.21	1.504	315.22	70.865	39.15	1.541	4.50	0.177	8.7	316SS	CG	P
44.50	1.752	51175S	120.00	4.724	35.50	1.398	6.74	38.490	46.77	1.841	315.23	70.867	45.90	1.807	4.50	0.177	10.2	316SS	CG	P
44.50	1.752	51176S	140.00	5.512	35.50	1.398	5.76	32.890	54.73	2.155	315.23	70.866	52.20	2.055	4.50	0.177	11.6	316SS	CG	P
44.50	1.752	51177S	160.00	6.299	35.50	1.398	4.98	28.440	63.30	2.492	315.23	70.866	58.95	2.321	4.50	0.177	13.1	316SS	CG	P
45.26	1.782	51178S	64.00	2.520	34.74	1.368	25.00	142.750	18.47	0.727	461.85	103.828	32.24	1.269	5.26	0.207	6.1	316SS	CG	P
45.26	1.782	51179S	64.00	2.520	34.74	1.368	29.48	168.340	15.67	0.617	461.86	103.831	28.93	1.139	5.26	0.207	5.5	316SS	CG	P
45.26	1.782	51180S	74.00	2.913	34.74	1.368	20.63	117.800	22.39	0.881	461.84	103.827	36.82	1.450	5.26	0.207	7.0	316SS	CG	P
45.26	1.782	51181S	96.00	3.780	34.74	1.368	16.00	91.360	28.87	1.136	461.86	103.829	44.45	1.750	5.26	0.207	8.5	316SS	CG	P
45.26	1.782	51182S	96.00	3.780	34.74	1.368	18.76	107.120	24.62	0.969	461.85	103.829	39.45	1.553	5.26	0.207	7.5	316SS	CG	P
45.26	1.782	51183S	140.00	5.512	34.74	1.368	10.00	57.100	46.19	1.818	461.85	103.828	64.80	2.551	5.26	0.207	12.3	316SS	CG	P
45.26	1.782	51184S	140.00	5.512	34.74	1.368	12.14	69.320	38.04	1.498	461.85	103.829	55.23	2.174	5.26	0.207	10.5	316SS	CG	P
45.26	1.782	51185S	159.00	6.260	34.74	1.368	8.60	49.110	53.70	2.114	461.85	103.829	73.64	2.899	5.26	0.207	14.0	316SS	CG	P
45.26	1.782	51186S	205.00	8.071	34.74	1.368	7.10	40.540	65.05	2.561	461.86	103.829	86.95	3.423	5.26	0.207	16.5	316SS	CG	P
45.26	1.782	51187S	205.00	8.071	34.74	1.368	8.25	47.110	55.98	2.204	461.85	103.829	76.27	3.003	5.26	0.207	14.5	316SS	CG	P
45.26	1.782	51188S	232.00	9.134	34.74	1.368	5.73	32.720	80.60	3.173	461.86	103.829	105.20	4.142	5.26	0.207	20.0	316SS	CG	P
45.26	1.782	51189S	300.00	11.811	34.74	1.368	4.80	27.410	96.22	3.788	461.85	103.828	123.56	4.865	5.26	0.207	23.5	316SS	CG	P
45.26	1.782	51190S	300.00	11.811	34.74	1.368	5.58	31.860	82.77	3.259	461.85	103.828	107.83	4.245	5.26	0.207	20.5	316SS	CG	P
45.86	1.806	51191S	50.00	1.969	35.34	1.391	32.89	187.810	13.87	0.546	456.22	102.562	26.30	1.035	5.26	0.207	5.0	316SS	CG	P
45.86	1.806	51192S	70.00	2.756	35.34	1.391	21.92	125.170	20.81	0.819	456.22	102.563	34.19	1.346	5.26	0.207	6.5	316SS	CG	P
45.86	1.806	51193S	90.00	3.543	35.34	1.391	16.17	92.330	28.21	1.111	456.22	102.562	42.61	1.678	5.26	0.207	8.1	316SS	CG	P
45.86	1.806	51194S	110.00	4.331	35.34	1.391	12.81	73.150	35.61	1.402	456.22	102.561	51.02	2.009	5.26	0.207	9.7	316SS	CG	P
45.86	1.806	51195S	130.00	5.118	35.34	1.391	10.61	60.580	43.00	1.693	456.22	102.562	59.44	2.340	5.26	0.207	11.3	316SS	CG	P
45.86	1.806	51196S	150.00	5.906	35.34	1.391	9.13	52.130	49.97	1.967	456.22	102.562	67.33	2.651	5.26	0.207	12.8	316SS	CG	P
46.35	1.825	51197S	49.00	1.929	33.65	1.325	73.04	417.070	10.05	0.396	734.27	165.071	31.75	1.250	6.35	0.250	5.0	316SS	CG	P
46.35	1.825	51198S	60.00	2.362	33.65	1.325	62.60	357.460	11.73	0.462	734.30	165.077	34.93	1.375	6.35	0.250	5.5	316SS	CG	P
46.35	1.825	51199S	72.00	2.835	33.65	1.325	43.82	250.220	16.76	0.660	734.29	165.076	44.45	1.750	6.35	0.250	7.0	316SS	CG	P
46.35	1.825	51200S	90.00	3.543	33.65	1.325	39.84	227.490	18.43	0.726	734.29	165.075	47.63	1.875	6.35	0.250	7.5	316SS	CG	P
46.35	1.825	51201S	106.00	4.173	33.65	1.325	27.39	156.400	26.81	1.055	734.30	165.077	63.50	2.500	6.35	0.250	10.0	316SS	CG	P
46.35	1.825	51202S	135.00	5.315	33.65	1.325	25.78	147.210	28.48	1.121	734.29	165.076	66.68	2.625	6.35	0.250	10.5	316SS	CG	P
46.35	1.825	51203S	152.00	5.984	33.65	1.325	18.26	104.270	40.21	1.583	734.29	165.075	88.90	3.500	6.35	0.250	14.0	316SS	CG	P
46.35	1.825	51204S	195.00	7.677	33.65	1.325	17.53	100.100	41.89	1.649	734.30	165.077	92.08	3.625	6.35	0.250	14.5	316SS	CG	P
46.35	1.825	51205S	220.00	8.661	33.65	1.325	12.17	69.490	60.34	2.375	734.30	165.078	127.00	5.000	6.35	0.250	20.0	316SS	CG	P
46.35	1.825	51206S	280.00	11.024	33.65	1.325	11.84	67.610	62.02	2.442	734.29	165.076	130.18	5.125	6.35	0.250	20.5	316SS	CG	P
47.60	1.874	51207S	50.00	1.969	35.60	1.402	50.09	286.020	12.13	0.477	607.39	136.547	30.60	1.205	6.00	0.236	5.1	316SS	CG	P
47.60	1.874	51208S	70.00	2.756	35.60	1.402	33.04	188.660	18.38	0.724	607.41	136.551	40.20	1.583	6.00	0.236	6.7	316SS	CG	P
47.60	1.874	51209S	90.00	3.543	35.60	1.402	24.65	140.760	24.64	0.970	607.43	136.555	49.80	1.961	6.00	0.236	8.3	316SS	CG	P
47.60	1.874	51210S	110.00	4.331	35.60	1.402	19.41	110.830	31.29	1.232	607.42	136.553	60.00	2.362	6.00	0.236	10.0	316SS	CG	P
47.60	1.874	51211S	130.00	5.118	35.60	1.402	16.34	93.300	37.17	1.464	607.41	136.551	69.00	2.717	6.00	0.236	11.5	316SS	CG	P
47.60	1.874	51212S	150.00	5.906	35.60	1.402	13.86	79.140	43.83	1.725	607.42	136.552	79.20	3.118	6.00	0.236	13.2	316SS	CG	P
47.60	1.874	51213S	200.00	7.874	35.60	1.402	10.15	57.960	59.84	2.356	607.42	136.553	103.80	4.087	6.00	0.236	17.3	316SS	CG	P
48.95	1.927	51214S	60.00	2.362	36.25	1.427	47.74	272.600	14.63	0.576	698.58	157.047	36.83	1.450	6.35	0.250	5.8	316SS	CG	P
48.95	1.927	51215S	80.00	3.150	36.25	1.427	33.59	191.800	20.80	0.819	698.57	157.045	46.99	1.850	6.35	0.250	7.4	316SS	CG	P
48.95	1.927	51216S																		




Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length mm Inches	I.D. mm Inches	Rate N/mm Lbs./In.	Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length mm Inches	Wire Dia. mm Inches	Total Coils Mat'l	Ends	Finish									
52.60	2.071	51243S	160.00	6.299	40.60	1.598	10.62	60.640	52.14	2.053	553.67	124.471	74.40	2.929	6.00	0.236	12.4	316 SS	CG	P
52.60	2.071	51244S	200.00	7.874	40.60	1.598	8.31	47.450	66.63	2.623	553.67	124.470	91.80	3.614	6.00	0.236	15.3	316 SS	CG	P
52.60	2.071	51245S	250.00	9.843	40.60	1.598	6.58	37.570	84.14	3.313	553.67	124.470	112.80	4.441	6.00	0.236	18.8	316 SS	CG	P
53.95	2.124	51246S	50.00	1.969	41.25	1.624	50.01	285.560	12.77	0.503	638.53	143.547	29.21	1.150	6.35	0.250	4.6	316 SS	CG	P
53.95	2.124	51247S	70.00	2.756	41.25	1.624	32.51	185.640	19.64	0.773	638.53	143.547	38.10	1.500	6.35	0.250	6.0	316 SS	CG	P
53.95	2.124	51248S	90.00	3.543	41.25	1.624	23.64	134.990	27.01	1.063	638.52	143.544	47.63	1.875	6.35	0.250	7.5	316 SS	CG	P
53.95	2.124	51249S	110.00	4.331	41.25	1.624	18.84	107.580	33.89	1.334	638.53	143.546	56.52	2.225	6.35	0.250	8.9	316 SS	CG	P
53.95	2.124	51250S	130.00	5.118	41.25	1.624	15.67	89.480	40.75	1.604	638.52	143.545	65.41	2.575	6.35	0.250	10.3	316 SS	CG	P
53.95	2.124	51251S	150.00	5.906	41.25	1.624	13.40	76.520	47.65	1.876	638.52	143.546	74.30	2.925	6.35	0.250	11.7	316 SS	CG	P
53.95	2.124	51252S	200.00	7.874	41.25	1.624	9.78	55.850	65.29	2.570	638.53	143.546	97.16	3.825	6.35	0.250	15.3	316 SS	CG	P
53.95	2.124	51253S	250.00	9.843	41.25	1.624	7.65	43.680	83.47	3.286	638.52	143.546	120.65	4.750	6.35	0.250	19.0	316 SS	CG	P
54.00	2.126	51254S	73.00	2.874	46.00	1.811	5.89	33.630	33.26	1.310	195.92	44.044	20.00	0.787	4.00	0.157	5.0	316 SS	CG	P
54.00	2.126	51255S	99.00	3.898	46.00	1.811	5.30	30.260	36.97	1.455	195.92	44.045	22.00	0.866	4.00	0.157	5.5	316 SS	CG	P
54.00	2.126	51256S	112.00	4.409	46.00	1.811	3.53	20.160	55.50	2.185	195.92	44.045	28.00	1.102	4.00	0.157	7.0	316 SS	CG	P
54.00	2.126	51257S	150.00	5.906	46.00	1.811	3.40	19.410	57.62	2.269	195.92	44.045	30.00	1.181	4.00	0.157	7.5	316 SS	CG	P
54.00	2.126	51258S	169.00	6.654	46.00	1.811	2.21	12.620	88.65	3.490	195.92	44.045	40.00	1.575	4.00	0.157	10.0	316 SS	CG	P
54.00	2.126	51259S	230.00	9.055	46.00	1.811	2.20	12.560	89.06	3.506	195.92	44.045	42.00	1.654	4.00	0.157	10.5	316 SS	CG	P
54.00	2.126	51260S	246.00	9.685	46.00	1.811	1.47	8.390	133.28	5.247	195.92	44.045	56.00	2.205	4.00	0.157	14.0	316 SS	CG	P
54.00	2.126	51261S	335.00	13.189	46.00	1.811	1.50	8.570	130.61	5.142	195.92	44.045	58.00	2.283	4.00	0.157	14.5	316 SS	CG	P
54.00	2.126	51262S	361.00	14.213	46.00	1.811	0.98	5.600	199.92	7.871	195.92	44.045	80.00	3.150	4.00	0.157	20.0	316 SS	CG	P
54.00	2.126	51263S	490.00	19.291	46.00	1.811	1.00	5.710	195.92	7.713	195.92	44.045	82.00	3.228	4.00	0.157	20.5	316 SS	CG	P
55.26	2.176	51264S	65.00	2.559	44.74	1.761	21.74	8.056	382.81	86.058	26.30	1.035	5.26	0.207	5.0	316 SS	CG	P		
55.26	2.176	51265S	85.00	3.346	44.74	1.761	13.00	74.230	29.45	1.159	382.80	86.056	31.88	1.255	5.26	0.207	6.1	316 SS	CG	P
55.26	2.176	51266S	85.00	3.346	44.74	1.761	15.09	86.170	25.37	0.999	382.80	86.058	28.93	1.139	5.26	0.207	5.5	316 SS	CG	P
55.26	2.176	51267S	98.00	3.858	44.74	1.761	10.56	60.300	36.25	1.427	382.80	86.057	36.82	1.450	5.26	0.207	7.0	316 SS	CG	P
55.26	2.176	51268S	130.00	5.118	44.74	1.761	8.30	47.390	46.12	1.816	382.80	86.056	43.97	1.731	5.26	0.207	8.4	316 SS	CG	P
55.26	2.176	51269S	130.00	5.118	44.74	1.761	9.60	54.820	39.88	1.570	382.80	86.057	39.45	1.553	5.26	0.207	7.5	316 SS	CG	P
55.26	2.176	51270S	195.00	7.677	44.74	1.761	5.40	30.830	70.89	2.791	382.80	86.057	61.96	2.439	5.26	0.207	11.8	316 SS	CG	P
55.26	2.176	51271S	195.00	7.677	44.74	1.761	6.21	35.460	61.64	2.427	382.80	86.058	55.23	2.174	5.26	0.207	10.5	316 SS	CG	P
55.26	2.176	51272S	213.00	8.386	44.74	1.761	4.40	25.120	87.00	3.425	382.80	86.057	73.64	2.899	5.26	0.207	14.0	316 SS	CG	P
55.26	2.176	51273S	280.00	11.024	44.74	1.761	3.70	21.130	103.46	4.073	382.80	86.056	85.63	3.371	5.26	0.207	16.3	316 SS	CG	P
55.26	2.176	51274S	280.00	11.024	44.74	1.761	4.23	24.150	90.50	3.563	382.80	86.056	76.27	3.003	5.26	0.207	14.5	316 SS	CG	P
55.26	2.176	51275S	312.00	12.283	44.74	1.761	2.93	16.730	130.65	5.144	382.80	86.057	105.20	4.142	5.26	0.207	20.0	316 SS	CG	P
55.26	2.176	51276S	410.00	16.142	44.74	1.761	2.50	14.280	153.12	6.028	382.80	86.057	121.66	4.790	5.26	0.207	23.1	316 SS	CG	P
55.26	2.176	51277S	410.00	16.142	44.74	1.761	2.86	16.330	133.85	5.270	382.80	86.057	107.83	4.245	5.26	0.207	20.5	316 SS	CG	P
56.06	2.207	51278S	50.00	1.969	45.54	1.793	25.18	143.780	15.00	0.590	377.62	84.893	21.04	0.828	5.26	0.207	4.0	316 SS	CG	P
56.06	2.207	51279S	70.00	2.756	45.54	1.793	15.74	89.880	23.99	0.945	377.62	84.892	27.35	1.077	5.26	0.207	5.2	316 SS	CG	P
56.06	2.207	51280S	90.00	3.543	45.54	1.793	11.71	66.870	32.25	1.270	377.61	84.891	33.14	1.305	5.26	0.207	6.3	316 SS	CG	P
56.06	2.207	51281S	110.00	4.331	45.54	1.793	9.16	52.300	41.22	1.623	377.61	84.891	39.45	1.553	5.26	0.207	7.5	316 SS	CG	P
56.06	2.207	51282S	150.00	5.906	45.54	1.793	6.54	37.340	57.74	2.273	377.61	84.891	51.02	2.009	5.26	0.207	9.7	316 SS	CG	P
56.06	2.207	51283S	200.00	7.874	45.54	1.793	4.80	27.410	78.67	3.097	377.61	84.890	65.75	2.589	5.26	0.207	12.5	316 SS	CG	P
56.35	2.219	51284S	60.00	2.362	43.65	1.719	37.40	213.560	16.39	0.645	613.14	137.839	31.75	1.250	6.35	0.250	5.0	316 SS	CG	P
56.35	2.219	51285S	80.00	3.150	43.65	1.719	32.05	183.010	19.13	0.753	613.15	137.841	34.93	1.375	6.35	0.250	5.5	316 SS	CG	P
56.35	2.219	51286S	89.00	3.504	43.65	1.719	22.44	128.140	27.32	1.076	613.15	137.842	44.45	1.750	6.35	0.250	7.0	316 SS	CG	P
56.35	2.219	51287S	115.00	4.528	43.65	1.719	20.40	116.490	30.06	1.183	613.14	137.840	47.63	1.875	6.35	0.250	7.5	316 SS	CG	P
56.35	2.219	51288S	133.00	5.236	43.65	1.719	14.02	80.060	43.73	1.722	613.14	137.839	63.50	2.500	6.35	0.250	10.0	316 SS	CG	P
56.35	2.219	51289S	175.00	6.890	43.65	1.719	13.20	75.370	46.45	1.829	613.14	137.839	66.68	2.625	6.35	0.250	10.5	316 SS	CG	P
56.35	2.219	51290S	191.00	7.520	43.65	1.719	9.35	53.390	65.58	2.582	613.15	137.841	88.90	3.500	6.35	0.250	14.0	316 SS	CG	P
56.35	2.219	51291S	250.00	9.843	43.65	1.719	8.97	51.220	68.36	2.691	613.14	137.840	92.08	3.625	6.35	0.250	14.5	316 SS	CG	P
56.35	2.219	51292S	277.00	10.906	43.65	1.719	6.23	35.570	98.42	3.875	613.14	137.840	127.00	5.000	6.35	0.250	20.0	316 SS	CG	P
56.35	2.219	51293S	365.00	14.370	43.65	1.719	6.06	34.600	101.18	3.983	613.15	137.841	130.18	5.125	6.35	0.250	20.5	316 SS	CG	P
57.80	2.276	51294S	60.00	1.969	45.80	1.803	36.56	208.760	13.8											



Metric 316 Stainless Steel Compression

O.D. mm Inches	Century Stock Number	Free Length		I.D.		Rate		Sugg Max. Defl. mm Inches	Sugg Max. load N Lbs.	Solid Length		Wire Dia. mm Inches	Total Coils	Ends Mat'l	Finish			
		mm	Inches	mm	Inches	N/mm	Lbs./In.	mm	Inches	mm	Inches	mm	Inches					
64.15	2.526	51321S	130.00	5.118	51.45	2.026	11.17	63.780	48.59	1.913	542.78	122.023	53.98	2.125	6.35	0.250	8.5	316SS CG P
64.15	2.526	51322S	150.00	5.906	51.45	2.026	9.56	54.590	56.78	2.235	542.78	122.022	60.96	2.400	6.35	0.250	9.6	316SS CG P
64.15	2.526	51323S	200.00	7.874	51.45	2.026	6.92	39.510	78.44	3.088	542.78	122.023	79.38	3.125	6.35	0.250	12.5	316SS CG P
64.15	2.526	51324S	250.00	9.843	51.45	2.026	5.46	31.180	99.41	3.914	542.78	122.022	97.16	3.825	6.35	0.250	15.3	316SS CG P
68.26	2.687	51325S	89.00	3.504	57.74	2.273	8.80	50.250	35.55	1.400	312.82	70.325	26.30	1.035	5.26	0.207	5.0	316SS CG P
68.26	2.687	51326S	120.00	4.724	57.74	2.273	6.50	37.120	48.13	1.895	312.82	70.325	31.88	1.255	5.26	0.207	6.1	316SS CG P
68.26	2.687	51327S	120.00	4.724	57.74	2.273	7.54	43.050	41.49	1.633	312.82	70.325	28.93	1.139	5.26	0.207	5.5	316SS CG P
68.26	2.687	51328S	136.00	5.354	57.74	2.273	5.28	30.150	59.25	2.333	312.82	70.325	36.82	1.450	5.26	0.207	7.0	316SS CG P
68.26	2.687	51329S	180.00	7.087	57.74	2.273	4.10	23.410	76.30	3.004	312.82	70.324	44.39	1.748	5.26	0.207	8.4	316SS CG P
68.26	2.687	51330S	180.00	7.087	57.74	2.273	4.80	27.410	65.17	2.566	312.82	70.325	39.45	1.553	5.26	0.207	7.5	316SS CG P
68.26	2.687	51331S	206.00	8.110	57.74	2.273	3.30	18.840	94.79	3.732	312.82	70.325	52.60	2.071	5.26	0.207	10.0	316SS CG P
68.26	2.687	51332S	275.00	10.827	57.74	2.273	2.70	15.420	115.86	4.561	312.82	70.325	61.96	2.439	5.26	0.207	11.8	316SS CG P
68.26	2.687	51333S	275.00	10.827	57.74	2.273	3.11	17.760	100.59	3.960	312.82	70.325	55.23	2.174	5.26	0.207	10.5	316SS CG P
68.26	2.687	51334S	300.00	11.811	57.74	2.273	2.20	12.560	142.19	5.598	312.82	70.324	73.64	2.899	5.26	0.207	14.0	316SS CG P
68.26	2.687	51335S	395.00	15.551	57.74	2.273	1.80	10.280	173.79	6.842	312.82	70.324	87.68	3.452	5.26	0.207	16.7	316SS CG P
68.26	2.687	51336S	395.00	15.551	57.74	2.273	2.11	12.050	148.26	5.837	312.82	70.324	76.27	3.003	5.26	0.207	14.5	316SS CG P
68.26	2.687	51337S	440.00	17.323	57.74	2.273	1.47	8.390	212.80	8.378	312.82	70.325	105.20	4.142	5.26	0.207	20.0	316SS CG P
68.26	2.687	51338S	585.00	23.031	57.74	2.273	1.20	6.850	260.68	10.263	312.82	70.325	126.24	4.970	5.26	0.207	24.0	316SS CG P
68.26	2.687	51339S	585.00	23.031	57.74	2.273	1.43	8.170	218.76	8.612	312.82	70.325	107.83	4.245	5.26	0.207	20.5	316SS CG P
69.35	2.730	51340S	78.00	3.071	56.65	2.230	18.69	106.720	26.97	1.062	504.09	113.324	31.75	1.250	6.35	0.250	5.0	316SS CG P
69.35	2.730	51341S	105.00	4.134	56.65	2.230	16.02	91.480	31.47	1.239	504.10	113.326	34.93	1.375	6.35	0.250	5.5	316SS CG P
69.35	2.730	51342S	118.00	4.646	56.65	2.230	11.22	64.070	44.93	1.769	504.09	113.324	44.45	1.750	6.35	0.250	7.0	316SS CG P
69.35	2.730	51343S	155.00	6.102	56.65	2.230	10.20	58.240	49.42	1.946	504.09	113.325	47.63	1.875	6.35	0.250	7.5	316SS CG P
69.35	2.730	51344S	177.00	6.969	56.65	2.230	7.01	40.030	71.91	2.831	504.10	113.325	63.50	2.500	6.35	0.250	10.0	316SS CG P
69.35	2.730	51345S	235.00	9.252	56.65	2.230	6.60	37.690	76.38	3.007	504.10	113.325	66.68	2.625	6.35	0.250	10.5	316SS CG P
69.35	2.730	51346S	255.00	10.039	56.65	2.230	4.67	26.670	107.94	4.250	504.09	113.325	88.90	3.500	6.35	0.250	14.0	316SS CG P
69.35	2.730	51347S	340.00	13.386	56.65	2.230	4.49	25.640	112.27	4.420	504.10	113.326	92.08	3.625	6.35	0.250	14.5	316SS CG P
69.35	2.730	51348S	373.00	14.685	56.65	2.230	3.12	17.820	161.57	6.361	504.10	113.325	127.00	5.000	6.35	0.250	20.0	316SS CG P
69.35	2.730	51349S	500.00	19.685	56.65	2.230	3.03	17.300	166.37	6.550	504.10	113.325	130.18	5.125	6.35	0.250	20.5	316SS CG P
86.35	3.400	51350S	108.00	4.252	73.65	2.900	9.13	52.130	44.75	1.762	408.59	91.854	31.75	1.250	6.35	0.250	5.0	316SS CG P
86.35	3.400	51351S	145.00	5.709	73.65	2.900	7.83	44.710	52.18	2.054	408.59	91.855	34.93	1.375	6.35	0.250	5.5	316SS CG P
86.35	3.400	51352S	165.00	6.496	73.65	2.900	5.48	31.290	74.56	2.935	408.59	91.855	44.45	1.750	6.35	0.250	7.0	316SS CG P
86.35	3.400	51353S	220.00	8.661	73.65	2.900	4.98	28.440	82.05	3.230	408.59	91.855	47.63	1.875	6.35	0.250	7.5	316SS CG P
86.35	3.400	51354S	250.00	9.843	73.65	2.900	3.42	19.530	119.47	4.704	408.59	91.855	63.50	2.500	6.35	0.250	10.0	316SS CG P
86.35	3.400	51355S	335.00	13.189	73.65	2.900	3.22	18.390	126.89	4.996	408.59	91.855	66.68	2.625	6.35	0.250	10.5	316SS CG P
86.35	3.400	51356S	363.00	14.291	73.65	2.900	2.28	13.020	179.21	7.055	408.59	91.855	88.90	3.500	6.35	0.250	14.0	316SS CG P
86.35	3.400	51357S	490.00	19.291	73.65	2.900	2.19	12.510	186.57	7.345	408.59	91.855	92.08	3.625	6.35	0.250	14.5	316SS CG P
86.35	3.400	51358S	632.00	24.882	73.65	2.900	1.52	8.680	268.81	10.583	408.59	91.855	127.00	5.000	6.35	0.250	20.0	316SS CG P
86.35	3.400	51359S	720.00	28.346	73.65	2.900	1.48	8.450	276.07	10.869	408.59	91.855	130.18	5.125	6.35	0.250	20.5	316SS CG P



Long Length Compression Springs


The spring rate (lbs/in) can be determined for any cut length by simply dividing the listed spring rate constant (lbs) by the length we want to cut it to.

For example for ST2-13, if we want to cut it to 8", rate=1.1 lbs/8" = .138 lbs/in. Similarly, we can determine the solid length (in) by multiplying the listed solid length constant by the length we want to cut it to. For example for ST2-13, if we cut it to 8", Solid Length = $0.32 * 8" = 2.56"$

Long Length Compression Springs STAINLESS STEEL (302) 20 INCH LENGTHS

Century Stock Number	O.D. Inches mm	I.D. Inches mm	Wire Dia. Inches mm	Pitch Inches mm	Rate Constant Lbs. N	Sugg Max. Load Lbs. N	Solid Length Constant Inches mm							
ST2-13	0.125	3.175	0.099	2.515	0.013	0.33	0.042	1.07	1.1	4.89	0.72	3.20	0.32	8.13
ST2-15	0.125	3.175	0.095	2.413	0.015	0.38	0.04	1.02	1.9	8.45	1.08	4.80	0.39	9.91
ST2-17	0.125	3.175	0.091	2.311	0.017	0.43	0.035	0.89	3.0	13.34	1.54	6.85	0.49	12.45
ST2-20	0.125	3.175	0.085	2.159	0.02	0.51	0.033	0.84	5.8	25.80	2.43	10.81	0.61	15.49
ST3-15	0.187	4.750	0.157	3.988	0.015	0.38	0.067	1.70	1.0	4.45	0.74	3.29	0.21	5.33
ST3-17	0.187	4.750	0.153	3.886	0.017	0.43	0.066	1.68	1.4	6.23	1.06	4.71	0.28	7.11
ST3-20	0.187	4.750	0.147	3.734	0.02	0.51	0.066	1.68	2.9	12.90	1.68	7.47	0.32	8.13
ST3-26	0.187	4.750	0.135	3.429	0.026	0.66	0.052	1.32	7.3	32.47	3.52	15.66	0.51	12.95
ST4-15	0.25	6.350	0.22	5.588	0.015	0.38	0.125	3.18	.60	2.67	0.56	2.49	0.13	3.30
ST4-17	0.25	6.350	0.216	5.486	0.017	0.43	0.117	2.97	10	44.48	0.95	4.23	0.16	4.06
ST4-20	0.25	6.350	0.21	5.334	0.02	0.51	0.098	2.49	1.6	7.12	1.28	5.69	0.22	5.59
ST4-26	0.25	6.350	0.198	5.029	0.026	0.66	0.08	2.03	4.2	18.68	2.69	11.97	0.34	8.64
ST4-32	0.25	6.350	0.186	4.724	0.032	0.81	0.07	1.78	10	44.48	4.81	21.39	0.42	10.67
ST5-20	0.312	7.925	0.272	6.909	0.02	0.51	0.15	3.81	1.2	5.34	1.03	4.58	0.15	3.81
ST5-26	0.312	7.925	0.26	6.604	0.026	0.66	0.114	2.90	2.9	12.90	2.18	9.70	0.25	6.35
ST5-32	0.312	7.925	0.248	6.299	0.032	0.81	0.095	2.41	7.0	31.14	3.92	17.44	0.31	7.87
ST5-41	0.312	7.925	0.23	5.842	0.041	1.04	0.08	2.03	15	66.72	7.81	34.74	0.53	13.46
ST6-32	0.375	9.525	0.311	7.899	0.032	0.81	0.13	3.30	4.4	19.57	3.29	14.63	0.27	6.86
ST6-41	0.375	9.525	0.293	7.442	0.041	1.04	0.111	2.82	11	48.93	6.59	29.31	0.39	9.91
ST6-54	0.375	9.525	0.267	6.782	0.054	1.37	0.095	2.41	32	142.34	14.06	62.54	0.6	15.24
ST7-41	0.438	11.125	0.356	9.042	0.041	1.04	0.13	3.30	7.6	33.80	5.69	25.31	0.34	8.64
ST7-54	0.438	11.125	0.33	8.382	0.054	1.37	0.117	2.97	23	102.30	12.2	54.27	0.49	12.45
ST8-54	0.5	12.700	0.392	9.957	0.054	1.37	0.142	3.61	18	80.06	10.79	47.99	0.41	10.41
ST8-72	0.5	12.700	0.356	9.042	0.072	1.83	0.133	3.38	62	275.78	23.66	105.24	0.57	14.48
ST9-41	0.562	14.275	0.48	12.192	0.041	1.04	0.146	3.71	3.8	16.90	4.48	19.93	0.31	7.87
ST9-54	0.562	14.275	0.454	11.532	0.054	1.37	0.166	4.22	14	62.27	9.66	42.97	0.36	9.14
ST9-72	0.562	14.275	0.418	10.617	0.072	1.83	0.142	3.61	44	195.71	21.27	94.61	0.54	13.72
ST9-91	0.562	14.275	0.38	9.652	0.091	2.31	0.142	3.61	128	569.34	39.86	177.30	0.67	17.02
ST10-72	0.625	15.875	0.481	12.217	0.072	1.83	0.166	4.22	35	155.68	19.27	85.71	0.47	11.94
ST10-91	0.625	15.875	0.443	11.252	0.091	2.31	0.16	4.06	99	440.35	42.43	188.73	0.61	15.49
ST12-91	0.75	19.050	0.568	14.427	0.091	2.31	0.2	5.08	66	293.57	30.69	136.51	0.5	12.70

Available for immediate shipment



Long Length Compression Springs CARBON STEEL (ASTM A227) 36 INCH LENGTHS


Century Stock Number	O.D.		I.D.		Wire Dia.		Pitch		Rate Constant		Sugg. Max. Load	Solid Length Constant		
	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Lbs.	N	Lbs.	N	Inches	mm
R-1	0.094	2.388	0.068	1.727	0.013	0.33	0.028	0.71	2.2	9.79	1.05	4.67	0.48	12.19
R-2	0.125	3.175	0.097	2.464	0.014	0.36	0.039	0.99	1.6	7.12	1.22	5.43	0.38	9.65
R-3	0.125	3.175	0.089	2.261	0.018	0.46	0.037	0.94	4.6	20.46	2.44	10.85	0.45	11.43
R-4	0.125	3.175	0.079	2.007	0.023	0.58	0.036	0.91	13.7	60.94	3.86	17.17	0.65	16.51
R-5	0.187	4.750	0.151	3.835	0.018	0.46	0.063	1.60	2.0	8.90	1.36	6.05	0.3	7.62
R-6	0.187	4.750	0.131	3.327	0.028	0.71	0.063	1.60	13.8	61.38	4.63	20.59	0.46	11.68
R-7	0.25	6.350	0.204	5.182	0.023	0.58	0.083	2.11	2.9	12.90	2.54	11.30	0.3	7.62
R-8	0.25	6.350	0.18	4.572	0.035	0.89	0.072	1.83	15.6	69.39	6.57	29.22	0.5	12.70
R-9	0.312	7.925	0.23	5.842	0.041	1.04	0.091	2.31	18.6	82.73	8.3	36.92	0.47	11.94
R-10	0.312	7.925	0.217	5.512	0.048	1.22	0.086	2.18	35.8	159.24	12.42	55.24	0.57	14.48
R-11	0.375	9.525	0.305	7.747	0.035	0.89	0.13	3.30	7.1	31.58	4.51	20.06	0.3	7.62
R-12	0.438	11.125	0.343	8.712	0.048	1.22	0.13	3.30	16.7	74.28	9.1	40.48	0.4	10.16
R-13	0.5	12.700	0.405	10.287	0.048	1.22	0.167	4.24	13.8	61.38	8.03	35.72	0.39	9.91
R-14	0.5	12.700	0.392	9.957	0.054	1.37	0.151	3.84	20.9	92.96	11.46	50.97	0.39	9.91
R-15	0.5	12.700	0.375	9.525	0.063	1.60	0.139	3.53	38.0	169.02	17.15	76.28	0.48	12.19
R-15-A	0.562	14.275	0.467	11.862	0.048	1.22	0.132	3.35	7.4	32.92	7.18	31.94	0.39	9.91
R-16	0.562	14.275	0.437	11.100	0.063	1.60	0.176	4.47	32.0	142.34	15.39	68.45	0.39	9.91
R-17	0.562	14.275	0.402	10.211	0.08	2.03	0.157	3.99	83.0	369.18	30.3	134.77	0.55	13.97
R-18	0.625	15.875	0.501	12.725	0.062	1.57	0.204	5.18	24.5	108.98	13.92	61.92	0.35	8.89
R-19	0.625	15.875	0.481	12.217	0.072	1.83	0.181	4.60	41.5	184.59	20.59	91.58	0.44	11.18
R-20	0.625	15.875	0.442	11.227	0.092	2.34	0.175	4.45	120.0	533.76	39.67	176.45	0.57	14.48
R-21	0.75	19.050	0.59	14.986	0.08	2.03	0.234	5.94	46.0	204.61	23.21	103.24	0.39	9.91
R-22	0.75	19.050	0.54	13.716	0.105	2.67	0.21	5.33	137.0	609.38	49.56	220.44	0.55	13.97
R-23	0.875	22.225	0.715	18.161	0.08	2.03	0.3	7.62	35.2	156.57	20.06	89.23	0.33	8.38
R-24	1	25.400	0.817	20.752	0.092	2.34	0.317	8.05	43.9	195.27	25.63	114.00	0.35	8.89
R-25	1	25.400	0.759	19.279	0.121	3.07	0.287	7.29	131.0	582.69	54.1	240.64	0.49	12.45
R-26	1	25.400	0.73	18.542	0.135	3.43	0.272	6.91	201.6	896.72	74.62	331.91	0.56	14.22
R-27	1.125	28.575	0.914	23.216	0.106	2.69	0.382	9.70	65.5	291.34	33.98	151.14	0.35	8.89
R-27-A	1.188	30.175	0.738	18.745	0.225	5.72	0.337	8.56	1404	6244.99	252.26	1122.05	0.74	18.80
R-28	1.25	31.750	1.009	25.629	0.121	3.07	0.375	9.53	75.6	336.27	43.88	195.18	0.4	10.16
R-29	1.25	31.750	0.954	24.232	0.148	3.76	0.348	8.84	180	800.64	78.08	347.30	0.51	12.95
R-29-A	1.375	34.925	1.079	27.407	0.148	3.76	0.34	8.64	127	564.90	71.43	317.72	0.52	13.21
R-30	1.5	38.100	1.176	29.870	0.162	4.11	0.422	10.72	175	778.40	84.35	375.19	0.48	12.19
R-31	1.75	44.450	1.376	34.950	0.187	4.75	0.47	11.94	216	960.77	108.16	481.10	0.51	12.95

Available for immediate shipment

Extension Springs

Century Spring warehouses the largest inventory of high grade extension springs in the world. All of these springs are of the constant diameter type with a variety of hook/loop styles. Each spring is wound with an initial tension force which offers a small deflection load for secure installation "holding". The initial tension is equal to the minimum force required to separate adjacent coils. Unless otherwise noted, Century extension springs are made with either machine hook or full loop ends.

Selecting an Extension Spring

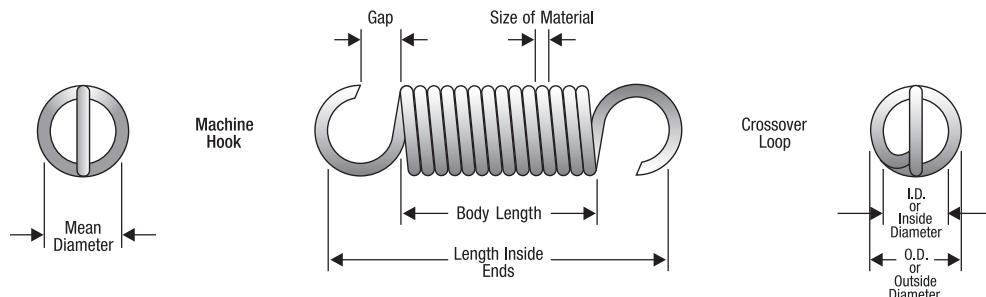

Turn to a page with outside diameters (O.D.) of interest. O.D.'s found in the left column of the page increase with page numbers.

Find the spring's length or rate (strength) you require. These values are normally in increasing order also.

- The rate is the load (pounds) it takes to deflect (stretch) the spring one theoretical inch. The rate is linear, i.e., if the rate = 40 lbs./1 in, it would take 10 pounds to deflect it 1/4 inch and 80 pounds to deflect it 2 inches, etc... The initial tension (I.T.) must be overcome before stretching commences.
- The load required to stretch a spring to some point is equal to the sum of the initial tension and the distance it stretched times its rate.

$$\text{Total Force} = \text{I.T.} + \text{Deflection} \times \text{Rate}$$

If the required springs O.D. and/or length are not important, select a page having reasonably sized springs for your application and scan the "Maximum Suggested Load" column. This value is the force created at the "Maximum Suggested Deflection" and includes the initial tension. The suggested maximum deflection and loads listed are for a spring expected to give an average cycle life of around 50,000 cycles. As cycling increases, the maximum load should be decreased in order to support a long service life.

Note: Suggested Max. Defl. is the distance a spring will travel over and above its free length.

The use of a fish scale of an appropriate size can be a convenient aid in determining the load required.

If a spring cannot be found for your application in our catalog inventory, please submit the item specs and quote details to customquote@centuryspring.com or use the custom quote form found at www.centuryspring.com/custom-springs.

Design Information

The basic extension rate and body-wire stress can be calculated with:

$$R = \frac{Gd^4}{8nD^3} \quad \text{and,} \quad R = \frac{P}{\Delta}$$

$$S = \frac{8PDK}{\pi d^3} + S_i \quad \text{or,} \quad S = \frac{8RDK\Delta}{\pi d^3}$$

Where: **D** = Mean diameter, (O.D. - d) inches

d = Wire diameter, inches

G = Modulus (spring steel=11.5×10⁶, stainless 10×10⁶)

K = Stress correction factor (see next page)

n = Number of coils

P = Applied load, lbs.

R = Rate (constant), lbs./in.

S = Body wire stress, psi

Δ = Deflection (stretch) due to load, inches


π = 3.14

S_i = Stress due to initial tension (see next page)

The suggested maximum-allowable stress value for an extension spring's body wire ranges between 30 and 45 percent of the material's minimum tensile strength (MTS). The suggested percentage values of the MTS to be used vary with the material type, and the MTS values for a given material vary with the wire diameter. These values can be found in the Material Properties section on page 12 of this catalog.

Stresses in the spring hooks are normally higher than in the spring body because there is a bending stress in addition to the wire-torsion stress; specifically, in the transition region between the last body coil and the hook. Therefore, an over-stressed extension spring can be expected to fail at the hook first. The suggested allowable hook stress in torsion is 30-45 percent (depending on material) of its MTS, while that for bending is 75 percent of its MTS.

An estimate of the total stress of a common extension-spring hook or loop can be determined with the following:

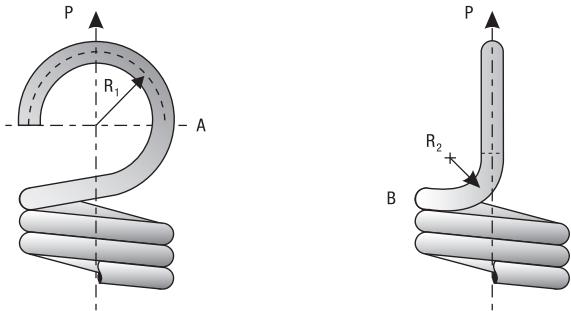

The maximum bending stress at point A:

$$S = \frac{32PR_1}{\pi d^3} K + \frac{4P}{\pi d^2} \quad (\text{psi})$$

The maximum torsion stress at point B:

$$S = \frac{16PR_2}{\pi d^3} \left(\frac{4C - 1}{4C - 4} \right) \quad (\text{psi})$$

Where: P = load, pounds


R_1 = Coil mean radius, inches

R_2 = Hook bend radius, inches


d = Wire diameter, inches

$$K = \frac{4c^2 - c - 1}{4c(c - 1)} \quad C = \frac{2R_1}{d}$$

Wahl Curvature Stress Correction

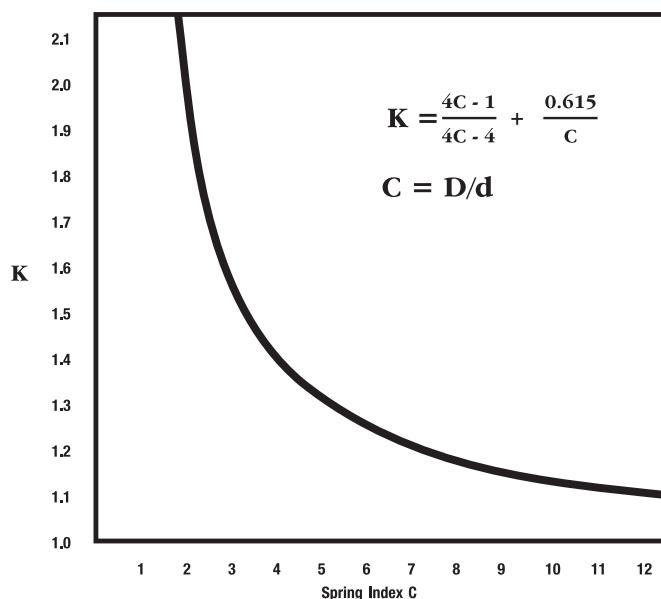

There is an increment of stress which is due to the initial tension that adds to the stress complexity; this should be accounted for in many cases. The initial tension causes the spring body to be under a constant stress which roughly varies with the spring mean diameter-to-wire diameter ratio. See the figure below.

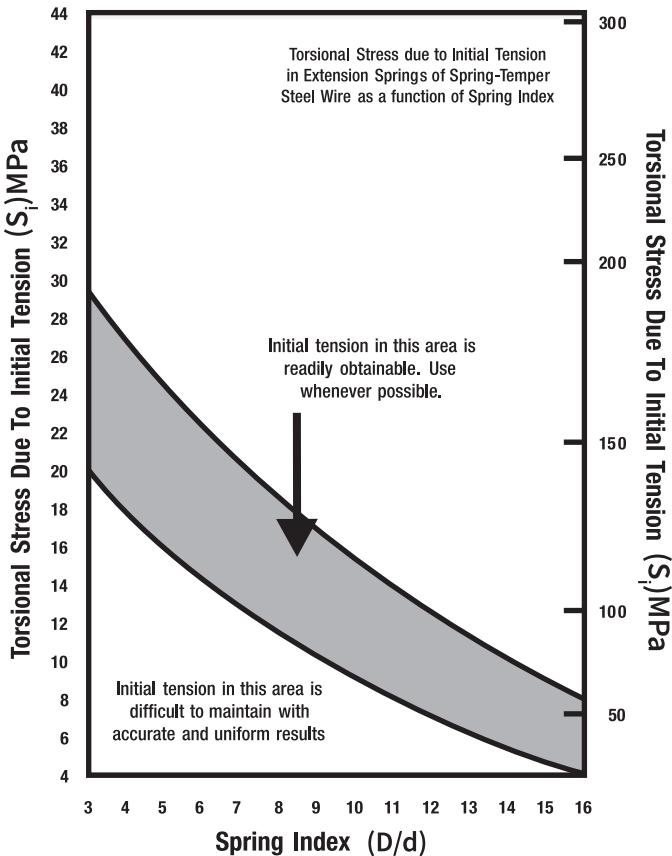

Spring Characteristics

Materials

The highest grades of spring wire are used in fabricating our springs. To create cost-effective warehousing of our stock spring inventory for our customers, we offer material certifications for custom springs only. For stock springs, we offer an optional material verification statement for a \$25 fee. Certifications of conformance for geometric tolerances set by the Spring Manufacturers Institute (SMI) for our stock springs are available upon request. See the Custom Spring section of this catalog, on [page 10](#) if material trace certifications or unique materials are required.


"Spring Steel", is a term that includes:

- Music wire
- Hard-drawn wire
- Oil-tempered wire

Stock extension springs are offered in Stainless steel 302 and 316 as specified.

Tolerances

Tolerances for extension spring rates depend upon the body diameter to wire-diameter ratio but are usually about +/- 10% and +/- 5% on the diameter. The initial tension is much more difficult to control and is offered as a reference value only.

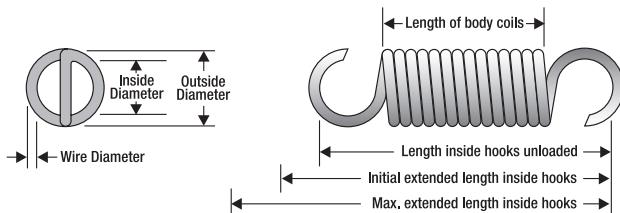

Data Required For Extension Springs

Outside Diameter _____ in. Max. outside dia. _____ in. Style of hooks _____

Length inside hooks _____ in. Min. inside dia. _____ in. _____

Wire Diameter _____ in. Initial tension _____ lbs. _____


Material _____ Rate _____ lbs. per in. Position of hooks _____

Total Coils _____ Max. extended length _____ in. Finish _____

To support _____ lbs. ± _____ lbs. at _____ in.

Ends


The ends on the extension springs offered in our stock inventory are the common machine-made hook and full-loop configurations. All part numbers in the 80,000's are of single-full-loop style. The hooks or loops may have an across center transition of the last coil before forming the hook or loop (see figure below). The catalog does not distinguish between these designs. (If you need to know, call us.) The catalog does footnote identify the double-loop, side-hook and extended-hook designs. **The angle between hook/loop planes is random (end position is random).** Our stock inventory extension-spring end configurations are depicted in the figures below:

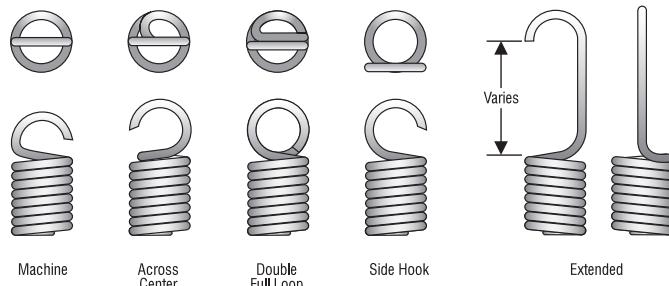

Finish

The finishes available for extension springs are as indicated in the "Finish" column of our listed inventory which include:


- Zinc
- Gold Iridite
- Black Oxide
- Passivated (upon request)
- None (can be plated upon request)

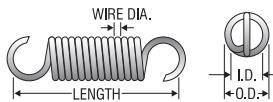


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm	Rate Lbs./In. N/mm	Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm	Mat'l	F nsh	E nds							
0.063	1.6	80000	0.25	6.35	1	0.18	0.03	0.13	0.29	7.366	0.32	1.42	0.007	0.18	MW	N	FL
0.063	1.6	80000S	0.25	6.35	0.85	0.15	0.03	0.13	0.22	5.588	0.22	0.98	0.007	0.18	SST	N	FL
0.063	1.6	80005	0.25	6.35	2	0.35	0.04	0.18	0.21	5.334	0.46	2.05	0.008	0.2	MW	N	FL
0.063	1.6	80005S	0.25	6.35	1.7	0.3	0.03	0.13	0.16	4.064	0.3	1.33	0.008	0.2	SST	N	FL
0.063	1.6	80012	0.25	6.35	3.7	0.65	0.06	0.27	0.16	4.064	0.65	2.89	0.009	0.23	MW	N	FL
0.063	1.6	80012S	0.25	6.35	3.1	0.54	0.05	0.22	0.12	3.048	0.42	1.87	0.009	0.23	SST	N	FL
0.063	1.6	80019	0.25	6.35	11	1.93	0.1	0.44	0.09	2.286	1.1	4.89	0.011	0.28	MW	N	FL
0.063	1.6	80019S	0.25	6.35	9.4	1.65	0.09	0.4	0.07	1.778	0.74	3.29	0.011	0.28	SST	N	FL
0.063	1.6	80001	0.31	7.874	0.7	0.12	0.03	0.13	0.42	10.668	0.32	1.42	0.007	0.18	MW	N	FL
0.063	1.6	80001S	0.31	7.874	0.59	0.1	0.03	0.13	0.32	8.128	0.22	0.98	0.007	0.18	SST	N	FL
0.063	1.6	80006	0.31	7.874	1.4	0.25	0.04	0.18	0.3	7.62	0.46	2.05	0.008	0.2	MW	N	FL
0.063	1.6	80006S	0.31	7.874	1.2	0.21	0.03	0.13	0.22	5.588	0.3	1.33	0.008	0.2	SST	N	FL
0.063	1.6	80013	0.31	7.874	2.7	0.47	0.06	0.27	0.22	5.588	0.65	2.89	0.009	0.23	MW	N	FL
0.063	1.6	80013S	0.31	7.874	2.3	0.4	0.05	0.22	0.16	4.064	0.42	1.87	0.009	0.23	SST	N	FL
0.063	1.6	80020	0.31	7.874	7.9	1.38	0.1	0.44	0.13	3.302	1.1	4.89	0.011	0.28	MW	N	FL
0.063	1.6	80020S	0.31	7.874	6.7	1.17	0.09	0.4	0.1	2.54	0.74	3.29	0.011	0.28	SST	N	FL
0.063	1.6	80002	0.38	9.652	0.52	0.09	0.03	0.13	0.57	14.478	0.32	1.42	0.007	0.18	MW	N	FL
0.063	1.6	80002S	0.38	9.652	0.44	0.08	0.03	0.13	0.44	11.176	0.22	0.98	0.007	0.18	SST	N	FL
0.063	1.6	80007	0.38	9.652	1.1	0.19	0.04	0.18	0.38	9.652	0.46	2.05	0.008	0.2	MW	N	FL
0.063	1.6	80007S	0.38	9.652	0.94	0.16	0.03	0.13	0.28	7.112	0.3	1.33	0.008	0.2	SST	N	FL
0.063	1.6	80014	0.38	9.652	2.1	0.37	0.06	0.27	0.28	7.112	0.65	2.89	0.009	0.23	MW	N	FL
0.063	1.6	80014S	0.38	9.652	1.8	0.32	0.05	0.22	0.21	5.334	0.42	1.87	0.009	0.23	SST	N	FL
0.063	1.6	80021	0.38	9.652	5.9	1.03	0.1	0.44	0.18	4.572	1.1	4.89	0.011	0.28	MW	N	FL
0.063	1.6	80021S	0.38	9.652	5	0.88	0.09	0.4	0.13	3.302	0.74	3.29	0.011	0.28	SST	N	FL
0.063	1.6	80003	0.44	11.176	0.42	0.07	0.03	0.13	0.7	17.78	0.32	1.42	0.007	0.18	MW	N	FL
0.063	1.6	80003S	0.44	11.176	0.35	0.06	0.03	0.13	0.54	13.716	0.22	0.98	0.007	0.18	SST	N	FL
0.063	1.6	80008	0.44	11.176	0.89	0.16	0.04	0.18	0.48	12.192	0.46	2.05	0.008	0.2	MW	N	FL
0.063	1.6	80008S	0.44	11.176	0.76	0.13	0.03	0.13	0.35	8.89	0.3	1.33	0.008	0.2	SST	N	FL
0.063	1.6	80015	0.44	11.176	1.7	0.3	0.06	0.27	0.35	8.89	0.65	2.89	0.009	0.23	MW	N	FL
0.063	1.6	80015S	0.44	11.176	1.4	0.25	0.05	0.22	0.26	6.604	0.42	1.87	0.009	0.23	SST	N	FL
0.063	1.6	80022	0.44	11.176	4.8	0.84	0.1	0.44	0.22	5.588	1.1	4.89	0.011	0.28	MW	N	FL
0.063	1.6	80022S	0.44	11.176	4.1	0.72	0.09	0.4	0.16	4.064	0.74	3.29	0.011	0.28	SST	N	FL
0.063	1.6	80004	0.5	12.7	0.38	0.07	0.03	0.13	0.77	19.558	0.32	1.42	0.007	0.18	MW	N	FL
0.063	1.6	80004S	0.5	12.7	0.32	0.06	0.03	0.13	0.59	14.986	0.22	0.98	0.007	0.18	SST	N	FL
0.063	1.6	80009	0.5	12.7	0.72	0.13	0.04	0.18	0.59	14.986	0.46	2.05	0.008	0.2	MW	N	FL
0.063	1.6	80009S	0.5	12.7	0.61	0.11	0.03	0.13	0.44	11.176	0.3	1.33	0.008	0.2	SST	N	FL
0.063	1.6	80016	0.5	12.7	1.4	0.25	0.06	0.27	0.42	10.668	0.65	2.89	0.009	0.23	MW	N	FL
0.063	1.6	80016S	0.5	12.7	1.2	0.21	0.05	0.22	0.31	7.874	0.42	1.87	0.009	0.23	SST	N	FL
0.063	1.6	80023	0.5	12.7	4.1	0.72	0.1	0.44	0.26	6.604	1.1	4.89	0.011	0.28	MW	N	FL
0.063	1.6	80023S	0.5	12.7	3.5	0.61	0.09	0.4	0.19	4.826	0.74	3.29	0.011	0.28	SST	N	FL
0.063	1.6	80010	0.63	16.002	0.59	0.1	0.04	0.18	0.72	18.288	0.46	2.05	0.008	0.2	MW	N	FL
0.063	1.6	80010S	0.63	16.002	0.5	0.09	0.03	0.13	0.54	13.716	0.3	1.33	0.008	0.2	SST	N	FL
0.063	1.6	ZZ3-2	0.63	16.002	0.51	0.09	0.05	0.22	0.52	13.208	0.32	1.42	0.008	0.2	SST	N	FL
0.063	1.6	80017	0.63	16.002	1.1	0.19	0.06	0.27	0.53	13.462	0.65	2.89	0.009	0.23	MW	N	FL
0.063	1.6	80017S	0.63	16.002	0.94	0.16	0.05	0.22	0.4	10.16	0.42	1.87	0.009	0.23	SST	N	FL
0.063	1.6	80024	0.63	16.002	3.2	0.56	0.1	0.44	0.33	8.382	1.1	4.89	0.011	0.28	MW	N	FL
0.063	1.6	80024S	0.63	16.002	2.7	0.47	0.09	0.4	0.24	6.096	0.74	3.29	0.011	0.28	SST	N	FL
0.063	1.6	ZZ3-18	0.66	16.764	0.46	0.08	0.05	0.22	0.58	14.732	0.32	1.42	0.008	0.2	SST	N	FL
0.063	1.6	80011	0.75	19.05	0.48	0.08	0.04	0.18	0.88	22.352	0.46	2.05	0.008	0.2	MW	N	FL
0.063	1.6	80011S	0.75	19.05	0.41	0.07	0.03	0.13	0.65	16.51	0.3	1.33	0.008	0.2	SST	N	FL
0.063	1.6	80018	0.75	19.05	0.88	0.15	0.06	0.27	0.67	17.018	0.65	2.89	0.009	0.23	MW	N	FL
0.063	1.6	80018S	0.75	19.05	0.75	0.13	0.05	0.22	0.49	12.446	0.42	1.87	0.009	0.23	SST	N	FL
0.063	1.6	ZZ2-24	0.75	19.05	0.78	0.14	0.09	0.4	0.48	12.192	0.46	2.05	0.009	0.23	SST	N	FL
0.063	1.6	80025	0.75	19.05	2.5	0.44	0.1	0.44	0.42	10.668	1.1	4.89	0.011	0.28	MW	N	FL
0.063	1.6	80025S	0.75	19.05	2.1	0.37	0.09	0.4	0.31	7.874	0.74	3.29	0.011	0.28	SST	N	FL
0.063	1.6	B-413	1	25.4	0.34	0.06	0.06	0.27	1.2	30.48	0.48	2.14	0.008	0.2	MW	Z	FL
0.078	1.981	5418	0.44	11.176	1	0.18	0.05	0.22	0.47	11.938	0.54	2.4	0.009	0.23	MW	N	MH
0.078	1.981	0-169	0.5	12.7	7.5	1.31	0.4	1.78	0.23	5.842	2.1	9.34	0.014	0.36	MW	Z	FL
0.078	1.981	ZZ1-10	1.94	49.276	0.6	0.11	0.2	0.89	1.2	30.48	0.88	3.91	0.012	0.3	SST	N	FL
0.094	2.388	B3-3	0.25	6.35	20	3.5	0.4	1.78	0.1	2.54	2.4	10.68	0.016	0.41	MW	N	MH
0.094	2.388	B3-8	0.34	8.636	0.15	0.03	0.01	0.04	1.3	33.02	0.21	0.93	0.007	0.18	MW	N	FL
0.094	2.388	80026	0.38	9.652	1.2	0.21	0.05	0.22	0.47	11.938	0.61	2.71	0.01	0.25	MW	N	FL
0.094	2.388	80026S	0.38	9.652	1	0.18	0.04	0.18	0.35	8.89	0.4	1.78	0.01	0.25	SST	N	FL
0.094	2.388	80033	0.38	9.652	2	0.35	0.07	0.31	0.38	9.652	0.81	3.6	0.011	0.28	MW	N	FL
0.094	2.388	80033S	0.38	9.652	1.7	0.3	0.06	0.27	0.28	7.112	0.52	2.31	0.011	0.28	SST	N	FL
0.094	2.388	80040	0.38	9.652	3.2	0.56	0.1	0.44	0.3	7.62	1.1	4.89	0.012	0.3	MW	N	FL
0.094	2.388	80040S	0.38	9.652	2.7	0.47	0.09	0.4	0.22	5.588	0.69	3.07	0.012	0.3	SST	N	FL
0.094	2.388	80047	0.38	9.652	4.7	0.82	0.1										




O.D. Inches	Century Stock Number	Length		Rate		Initial Tension Lbs.	Sugg Max. Defl. Inches	Sugg Max. load Lbs.	Wire Dia.		Mat'l	F n s h	E n d s	
		Inches	mm	Lbs./In.	N/mm				Inches	mm				
0.094	2.388	80048S	0.44	11.176	3.1	0.54	0.1	0.44	0.25	6.35	0.86	3.83	0.013	0.33
0.094	2.388	80055	0.44	11.176	5.5	0.96	0.2	0.89	0.27	6.858	1.6	7.12	0.014	0.36
0.094	2.388	80055S	0.44	11.176	4.7	0.82	0.1	0.44	0.2	5.08	1.1	4.89	0.014	0.36
0.094	2.388	80062	0.44	11.176	11	1.93	0.2	0.89	0.18	4.572	2.1	9.34	0.016	0.41
0.094	2.388	80062S	0.44	11.176	9.4	1.65	0.2	0.89	0.14	3.556	1.4	6.23	0.016	0.41
0.094	2.388	80028	0.5	12.7	0.78	0.14	0.05	0.22	0.72	18.288	0.61	2.71	0.01	0.25
0.094	2.388	80028S	0.5	12.7	0.66	0.12	0.04	0.18	0.53	13.462	0.4	1.78	0.01	0.25
0.094	2.388	80035	0.5	12.7	1.2	0.21	0.07	0.31	0.6	15.24	0.81	3.6	0.011	0.28
0.094	2.388	80035S	0.5	12.7	1	0.18	0.06	0.27	0.45	11.43	0.52	2.31	0.011	0.28
0.094	2.388	80042	0.5	12.7	2	0.35	0.1	0.44	0.48	12.192	1.1	4.89	0.012	0.3
0.094	2.388	80042S	0.5	12.7	1.7	0.3	0.09	0.4	0.35	8.89	0.69	3.07	0.012	0.3
0.094	2.388	80049	0.5	12.7	3.1	0.54	0.1	0.44	0.4	10.16	1.3	5.78	0.013	0.33
0.094	2.388	80049S	0.5	12.7	2.6	0.46	0.1	0.44	0.29	7.366	0.86	3.83	0.013	0.33
0.094	2.388	ZZ4-38	0.5	12.7	3	0.53	0.2	0.89	0.41	10.414	1.4	6.23	0.013	0.33
0.094	2.388	80056	0.5	12.7	4.6	0.81	0.2	0.89	0.32	8.128	1.6	7.12	0.014	0.36
0.094	2.388	80056S	0.5	12.7	3.9	0.68	0.1	0.44	0.24	6.096	1.1	4.89	0.014	0.36
0.094	2.388	80063	0.5	12.7	9.2	1.61	0.2	0.89	0.21	5.334	2.1	9.34	0.016	0.41
0.094	2.388	80063S	0.5	12.7	7.8	1.37	0.2	0.89	0.16	4.064	1.4	6.23	0.016	0.41
0.094	2.388	80029	0.63	16.002	0.58	0.1	0.05	0.22	0.97	24.638	0.61	2.71	0.01	0.25
0.094	2.388	80029S	0.63	16.002	0.49	0.09	0.04	0.18	0.72	18.288	0.4	1.78	0.01	0.25
0.094	2.388	80036	0.63	16.002	0.92	0.16	0.07	0.31	0.81	20.574	0.81	3.6	0.011	0.28
0.094	2.388	80036S	0.63	16.002	0.78	0.14	0.06	0.27	0.6	15.24	0.52	2.31	0.011	0.28
0.094	2.388	80043	0.63	16.002	1.5	0.26	0.1	0.44	0.64	16.256	1.1	4.89	0.012	0.3
0.094	2.388	80043S	0.63	16.002	1.3	0.23	0.09	0.4	0.47	11.938	0.69	3.07	0.012	0.3
0.094	2.388	80050	0.63	16.002	2.2	0.39	0.1	0.44	0.54	13.716	1.3	5.78	0.013	0.33
0.094	2.388	80050S	0.63	16.002	1.9	0.33	0.1	0.44	0.4	10.16	0.86	3.83	0.013	0.33
0.094	2.388	80057	0.63	16.002	3.4	0.6	0.2	0.89	0.43	10.922	1.6	7.12	0.014	0.36
0.094	2.388	80057S	0.63	16.002	2.9	0.51	0.1	0.44	0.32	8.128	1.1	4.89	0.014	0.36
0.094	2.388	80064	0.63	16.002	6.8	1.19	0.2	0.89	0.29	7.366	2.1	9.34	0.016	0.41
0.094	2.388	80064S	0.63	16.002	5.8	1.02	0.2	0.89	0.22	5.588	1.4	6.23	0.016	0.41
0.094	2.388	80030	0.75	19.05	0.42	0.07	0.05	0.22	1.3	33.02	0.61	2.71	0.01	0.25
0.094	2.388	80030S	0.75	19.05	0.36	0.06	0.04	0.18	0.99	25.146	0.4	1.78	0.01	0.25
0.094	2.388	80037	0.75	19.05	0.72	0.13	0.07	0.31	1	25.4	0.81	3.6	0.011	0.28
0.094	2.388	80037S	0.75	19.05	0.61	0.11	0.06	0.27	0.77	19.558	0.52	2.31	0.011	0.28
0.094	2.388	80044	0.75	19.05	1.2	0.21	0.1	0.44	0.8	20.32	1.1	4.89	0.012	0.3
0.094	2.388	80044S	0.75	19.05	1	0.18	0.09	0.4	0.59	14.986	0.69	3.07	0.012	0.3
0.094	2.388	80051	0.75	19.05	1.8	0.32	0.1	0.44	0.69	17.526	1.3	5.78	0.013	0.33
0.094	2.388	80051S	0.75	19.05	1.5	0.26	0.1	0.44	0.51	12.954	0.86	3.83	0.013	0.33
0.094	2.388	80058	0.75	19.05	2.7	0.47	0.2	0.89	0.55	13.97	1.6	7.12	0.014	0.36
0.094	2.388	80058S	0.75	19.05	2.3	0.4	0.1	0.44	0.4	10.16	1.1	4.89	0.014	0.36
0.094	2.388	80065	0.75	19.05	5.3	0.93	0.2	0.89	0.37	9.398	2.1	9.34	0.016	0.41
0.094	2.388	80065S	0.75	19.05	4.5	0.79	0.2	0.89	0.29	7.366	1.4	6.23	0.016	0.41
0.094	2.388	80031	0.88	22.352	0.33	0.06	0.05	0.22	1.7	43.18	0.61	2.71	0.01	0.25
0.094	2.388	80031S	0.88	22.352	0.28	0.05	0.04	0.18	1.3	33.02	0.4	1.78	0.01	0.25
0.094	2.388	80038	0.88	22.352	0.6	0.11	0.07	0.31	1.2	30.48	0.81	3.6	0.011	0.28
0.094	2.388	80038S	0.88	22.352	0.51	0.09	0.06	0.27	0.92	23.368	0.52	2.31	0.011	0.28
0.094	2.388	80045	0.88	22.352	0.98	0.17	0.1	0.44	0.98	24.892	1.1	4.89	0.012	0.3
0.094	2.388	80045S	0.88	22.352	0.83	0.15	0.09	0.4	0.72	18.288	0.69	3.07	0.012	0.3
0.094	2.388	80052	0.88	22.352	1.5	0.26	0.1	0.44	0.83	21.082	1.3	5.78	0.013	0.33
0.094	2.388	80052S	0.88	22.352	1.2	0.21	0.1	0.44	0.62	15.748	0.86	3.83	0.013	0.33
0.094	2.388	80059S	0.88	22.352	1.9	0.33	0.1	0.44	0.5	12.7	1.1	4.89	0.014	0.36
0.094	2.388	ZZ1-26	0.88	22.352	2.2	0.39	0.2	0.89	0.66	16.764	1.7	7.56	0.014	0.36
0.094	2.388	80066	0.88	22.352	4.4	0.77	0.2	0.89	0.44	11.176	2.1	9.34	0.016	0.41
0.094	2.388	80066S	0.88	22.352	3.7	0.65	0.2	0.89	0.34	8.636	1.4	6.23	0.016	0.41
0.094	2.388	80032S	1	25.4	0.26	0.05	0.04	0.18	1.4	35.56	0.4	1.78	0.01	0.25
0.094	2.388	203-A	1	25.4	0.29	0.05	0.06	0.27	2	50.8	0.62	2.76	0.01	0.25
0.094	2.388	80039	1	25.4	0.51	0.09	0.07	0.31	1.5	38.1	0.81	3.6	0.011	0.28
0.094	2.388	80039S	1	25.4	0.43	0.08	0.06	0.27	1.1	27.94	0.52	2.31	0.011	0.28
0.094	2.388	80046S	1	25.4	0.69	0.12	0.09	0.4	0.87	22.098	0.69	3.07	0.012	0.3
0.094	2.388	203-B	1	25.4	0.75	0.13	0.1	0.44	1.3	33.02	1.1	4.89	0.012	0.3
0.094	2.388	80053	1	25.4	1.2	0.21	0.1	0.44	0.98	24.892	1.3	5.78	0.013	0.33
0.094	2.388	80053S	1	25.4	1	0.18	0.1	0.44	0.72	18.288	0.86	3.83	0.013	0.33
0.094	2.388	80060S	1	25.4	1.6	0.28	0.1	0.44	0.57	14.478	1.1	4.89	0.014	0.36
0.094	2.388	ZZ3-28	1	25.4	1.8	0.32	0.2	0.89	0.82	20.828	1.7	7.56	0.014	0.36
0.094	2.388	203-C	1	25.4	2.6	0.46	0.3	1.33	0.63	16.002	1.9	8.45	0.015	0.38
0.094	2.388	80067	1	25.4	3.7	0.65	0.2	0.89	0.53	13.462	2.1	9.34	0.016	0.41
0.094	2.388	80067S	1	25.4	3.1	0.54	0.2	0.89	0.41	10.414	1.4	6.23	0.016	0.41
0.094	2.388	ZZ1-19	1.28	32.512	0.89	0.16	0.2	0.89	1.4	35.56	1.4	6.23	0.013	0.33
0.109	2.769	0-161	0.22	5.588	1.2	0.21	0.03	0.13	0.31	7.874	0.39	1.73	0.009	0.23
0.109	2.769	N-308	0.25	6.35	0.23	0.04	0.01	0.04	0.76	19.304	0.19	0.85	0.007	0.18
0.109	2.769	450	0.28	7.112	8.1	1.42	0.2	0.89	0.16	4.064	1.5	6.67	0.014	0.36
0.109	2.769	0-65	0.38	9.652	0.2	0.04	0.02	0.09	1.3	33.02	0.27	1.2	0.008	0.2
0.109	2.769	462	0.38	9.652	1.1	0.19	0.06	0.27	0.59	14.986	0.71	3.16	0.011	0.28
0.109	2.769	454	0.41	1										

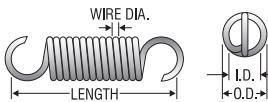


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm	Rate Lbs./In. N/mm	Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm	Mat'l	F nsh s								
0.12	3.048	80078	0.38	9.652	7.9	1.38	0.2	0.89	0.2	5.08	1.8	8.01	0.016	0.41	MW	N	FL
0.12	3.048	80078S	0.38	9.652	6.7	1.17	0.2	0.89	0.16	4.064	1.2	5.34	0.016	0.41	SST	N	FL
0.12	3.048	80090	0.38	9.652	14	2.45	0.2	0.89	0.15	3.81	2.4	10.68	0.018	0.46	MW	N	FL
0.12	3.048	80090S	0.38	9.652	12	2.1	0.2	0.89	0.12	3.048	1.6	7.12	0.018	0.46	SST	N	FL
0.12	3.048	80068	0.5	12.7	2	0.35	0.1	0.44	0.6	15.24	1.3	5.78	0.014	0.36	MW	N	FL
0.12	3.048	80068S	0.5	12.7	1.7	0.3	0.1	0.44	0.44	11.176	0.86	3.83	0.014	0.36	SST	N	FL
0.12	3.048	80079	0.5	12.7	4.4	0.77	0.2	0.89	0.37	9.398	1.8	8.01	0.016	0.41	MW	N	FL
0.12	3.048	80079S	0.5	12.7	3.7	0.65	0.2	0.89	0.28	7.112	1.2	5.34	0.016	0.41	SST	N	FL
0.12	3.048	80091	0.5	12.7	8.1	1.42	0.3	1.33	0.27	6.858	2.5	11.12	0.018	0.46	MW	N	FL
0.12	3.048	80091S	0.5	12.7	6.9	1.21	0.2	0.89	0.21	5.334	1.7	7.56	0.018	0.46	SST	N	FL
0.12	3.048	80103	0.5	12.7	14	2.45	0.4	1.78	0.21	5.334	3.4	15.12	0.02	0.51	MW	N	FL
0.12	3.048	80103S	0.5	12.7	12	2.1	0.3	1.33	0.16	4.064	2.3	10.23	0.02	0.51	SST	N	FL
0.12	3.048	80069	0.63	16.002	1.5	0.26	0.1	0.44	0.8	20.32	1.3	5.78	0.014	0.36	MW	N	FL
0.12	3.048	80069S	0.63	16.002	1.3	0.23	0.09	0.4	0.59	14.986	0.85	3.78	0.014	0.36	SST	N	FL
0.12	3.048	80080	0.63	16.002	3.1	0.54	0.2	0.89	0.52	13.208	1.8	8.01	0.016	0.41	MW	N	FL
0.12	3.048	80080S	0.63	16.002	2.6	0.46	0.2	0.89	0.4	10.16	1.2	5.34	0.016	0.41	SST	N	FL
0.12	3.048	80092	0.63	16.002	5.7	1	0.3	1.33	0.39	9.906	2.5	11.12	0.018	0.46	MW	N	FL
0.12	3.048	80092S	0.63	16.002	4.9	0.86	0.2	0.89	0.3	7.62	1.7	7.56	0.018	0.46	SST	N	FL
0.12	3.048	80104	0.63	16.002	10	1.75	0.4	1.78	0.3	7.62	3.4	15.12	0.02	0.51	MW	N	FL
0.12	3.048	80104S	0.63	16.002	8.6	1.51	0.3	1.33	0.23	5.842	2.3	10.23	0.02	0.51	SST	N	FL
0.12	3.048	80115	0.63	16.002	17	2.98	0.4	1.78	0.23	5.842	4.3	19.13	0.022	0.56	MW	N	FL
0.12	3.048	80115S	0.63	16.002	15	2.63	0.3	1.33	0.18	4.572	2.9	12.9	0.022	0.56	SST	N	FL
0.12	3.048	80070	0.75	19.05	1.1	0.19	0.1	0.44	1.1	27.94	1.3	5.78	0.014	0.36	MW	N	FL
0.12	3.048	80070S	0.75	19.05	0.97	0.17	0.09	0.4	0.78	19.812	0.85	3.78	0.014	0.36	SST	N	FL
0.12	3.048	80081	0.75	19.05	2.3	0.4	0.2	0.89	0.69	17.526	1.8	8.01	0.016	0.41	MW	N	FL
0.12	3.048	80081S	0.75	19.05	2	0.35	0.2	0.89	0.54	13.716	1.2	5.34	0.016	0.41	SST	N	FL
0.12	3.048	80093	0.75	19.05	4.4	0.77	0.3	1.33	0.51	12.954	2.5	11.12	0.018	0.46	MW	N	FL
0.12	3.048	80093S	0.75	19.05	3.7	0.65	0.2	0.89	0.39	9.906	1.7	7.56	0.018	0.46	SST	N	FL
0.12	3.048	80105	0.75	19.05	7.9	1.38	0.4	1.78	0.38	9.652	3.4	15.12	0.02	0.51	MW	N	FL
0.12	3.048	80105S	0.75	19.05	6.7	1.17	0.3	1.33	0.29	7.366	2.3	10.23	0.02	0.51	SST	N	FL
0.12	3.048	80116	0.75	19.05	13	2.28	0.4	1.78	0.3	7.62	4.3	19.13	0.022	0.56	MW	N	FL
0.12	3.048	80116S	0.75	19.05	11	1.93	0.3	1.33	0.23	5.842	2.9	12.9	0.022	0.56	SST	N	FL
0.12	3.048	80071	0.81	20.574	0.97	0.17	0.1	0.44	1.2	30.48	1.3	5.78	0.014	0.36	MW	N	FL
0.12	3.048	80071S	0.81	20.574	0.82	0.14	0.1	0.44	0.91	23.114	0.86	3.83	0.014	0.36	SST	N	FL
0.12	3.048	80072	0.88	22.352	0.94	0.16	0.1	0.44	1.3	33.02	1.3	5.78	0.014	0.36	MW	N	FL
0.12	3.048	80072S	0.88	22.352	0.8	0.14	0.09	0.4	0.94	23.876	0.85	3.78	0.014	0.36	SST	N	FL
0.12	3.048	80082	0.88	22.352	1.9	0.33	0.2	0.89	0.85	21.59	1.8	8.01	0.016	0.41	MW	N	FL
0.12	3.048	80082S	0.88	22.352	1.6	0.28	0.2	0.89	0.66	16.764	1.2	5.34	0.016	0.41	SST	N	FL
0.12	3.048	80094	0.88	22.352	3.6	0.63	0.3	1.33	0.62	15.748	2.5	11.12	0.018	0.46	MW	N	FL
0.12	3.048	80094S	0.88	22.352	3	0.53	0.2	0.89	0.48	12.192	1.7	7.56	0.018	0.46	SST	N	FL
0.12	3.048	80106	0.88	22.352	6.4	1.12	0.4	1.78	0.47	11.938	3.4	15.12	0.02	0.51	MW	N	FL
0.12	3.048	80106S	0.88	22.352	5.4	0.95	0.3	1.33	0.37	9.398	2.3	10.23	0.02	0.51	SST	N	FL
0.12	3.048	80117	0.88	22.352	11	1.93	0.4	1.78	0.37	9.398	4.3	19.13	0.022	0.56	MW	N	FL
0.12	3.048	80117S	0.88	22.352	9.2	1.61	0.3	1.33	0.28	7.112	2.9	12.9	0.022	0.56	SST	N	FL
0.12	3.048	80073	1	25.4	0.78	0.14	0.1	0.44	1.5	38.1	1.3	5.78	0.014	0.36	MW	N	FL
0.12	3.048	80073S	1	25.4	0.66	0.12	0.09	0.4	1.1	27.94	0.85	3.78	0.014	0.36	SST	N	FL
0.12	3.048	80083	1	25.4	1.6	0.28	0.2	0.89	1	25.4	1.8	8.01	0.016	0.41	MW	N	FL
0.12	3.048	80083S	1	25.4	1.4	0.25	0.2	0.89	0.77	19.558	1.2	5.34	0.016	0.41	SST	N	FL
0.12	3.048	80095	1	25.4	3.1	0.54	0.3	1.33	0.71	18.034	2.5	11.12	0.018	0.46	MW	N	FL
0.12	3.048	80095S	1	25.4	2.6	0.46	0.2	0.89	0.55	13.97	1.7	7.56	0.018	0.46	SST	N	FL
0.12	3.048	80107	1	25.4	5.6	0.98	0.4	1.78	0.54	13.716	3.4	15.12	0.02	0.51	MW	N	FL
0.12	3.048	80107S	1	25.4	4.7	0.82	0.3	1.33	0.42	10.668	2.3	10.23	0.02	0.51	SST	N	FL
0.12	3.048	80118	1	25.4	9.2	1.61	0.4	1.78	0.43	10.922	4.3	19.13	0.022	0.56	MW	N	FL
0.12	3.048	80118S	1	25.4	7.8	1.37	0.3	1.33	0.33	8.382	2.9	12.9	0.022	0.56	SST	N	FL
0.12	3.048	80074	1.13	28.702	0.67	0.12	0.1	0.44	1.8	45.72	1.3	5.78	0.014	0.36	MW	N	FL
0.12	3.048	80074S	1.13	28.702	0.57	0.1	0.09	0.4	1.3	33.02	0.85	3.78	0.014	0.36	SST	N	FL
0.12	3.048	80084	1.13	28.702	1.4	0.25	0.2	0.89	1.2	30.48	1.8	8.01	0.016	0.41	MW	N	FL
0.12	3.048	80084S	1.13	28.702	1.1	0.19	0.2	0.89	0.92	23.368	1.2	5.34	0.016	0.41	SST	N	FL
0.12	3.048	80096	1.13	28.702	2.7	0.47	0.3	1.33	0.84	21.336	2.5	11.12	0.018	0.46	MW	N	FL
0.12	3.048	80096S	1.13	28.702	2.3	0.4	0.2	0.89	0.65	16.51	1.7	7.56	0.018	0.46	SST	N	FL
0.12	3.048	80108	1.13	28.702	4.8	0.84	0.4	1.78	0.63	16.002	3.4	15.12	0.02	0.51	MW	N	FL
0.12	3.048	80108S	1.13	28.702	4.1	0.72	0.3	1.33	0.48	12.192	2.3	10.23	0.02	0.51	SST	N	FL
0.12	3.048	80119	1.13	28.702	8	1.4	0.4	1.78	0.49	12.446	4.3	19.13	0.022	0.56	MW	N	FL
0.12	3.048	80119S	1.13	28.702	6.8	1.19	0.3	1.33	0.38	9.652	2.9	12.9	0.022	0.56	SST	N	FL
0.12	3.048	80075	1.25	31.75	0.58	0.1	0.1	0.44	2.1	53.34	1.3	5.78	0.014	0.36	MW	N	FL
0.12	3.048	80075S	1.25	31.75	0.5	0.09	0.09	0.4	1.5	38.1	0.85	3.78	0.014	0.36	SST	N	FL
0.12	3.048	80085	1.25	31.75	1.3	0.23	0.2	0.89	1.3	33.02	1.8	8.01	0.016	0.41	MW	N	FL
0.12	3.048	80085S	1.25	31.75	1.1	0.19	0.2	0.89	0.99	25.146	1.2						




O.D. Inches	Century Stock Number	Length Inches	Rate Lbs./In.	Initial Tension Lbs.	Sugg Max. Defl. Inches	Sugg Max. load Lbs.	Wire Dia. Inches	Mat'l	F	E							
									mm	nds							
0.12	3.048	80110	1.38	35.052	3.8	0.67	0.4	1.78	0.8	20.32	3.4	15.12	0.02	0.51	MW	N	FL
0.12	3.048	80110S	1.38	35.052	3.2	0.56	0.3	1.33	0.62	15.748	2.3	10.23	0.02	0.51	SST	N	FL
0.12	3.048	80121	1.38	35.052	6.4	1.12	0.4	1.78	0.62	15.748	4.3	19.13	0.022	0.56	MW	N	FL
0.12	3.048	80121S	1.38	35.052	5.4	0.95	0.3	1.33	0.48	12.192	2.9	12.9	0.022	0.56	SST	N	FL
0.12	3.048	80077	1.5	38.1	0.48	0.08	0.1	0.44	2.5	63.5	1.3	5.78	0.014	0.36	MW	N	FL
0.12	3.048	80077S	1.5	38.1	0.41	0.07	0.09	0.4	1.9	48.26	0.85	3.78	0.014	0.36	SST	N	FL
0.12	3.048	80087	1.5	38.1	0.95	0.17	0.2	0.89	1.7	43.18	1.8	8.01	0.016	0.41	MW	N	FL
0.12	3.048	80087S	1.5	38.1	0.81	0.14	0.2	0.89	1.3	33.02	1.2	5.34	0.016	0.41	SST	N	FL
0.12	3.048	80099	1.5	38.1	1.9	0.33	0.3	1.33	1.2	30.48	2.5	11.12	0.018	0.46	MW	N	FL
0.12	3.048	80099S	1.5	38.1	1.6	0.28	0.2	0.89	0.9	22.86	1.7	7.56	0.018	0.46	SST	N	FL
0.12	3.048	80111	1.5	38.1	3.5	0.61	0.4	1.78	0.87	22.098	3.4	15.12	0.02	0.51	MW	N	FL
0.12	3.048	80111S	1.5	38.1	2.9	0.51	0.3	1.33	0.67	17.018	2.3	10.23	0.02	0.51	SST	N	FL
0.12	3.048	80122	1.5	38.1	5.7	1	0.4	1.78	0.69	17.526	4.3	19.13	0.022	0.56	MW	N	FL
0.12	3.048	80122S	1.5	38.1	4.8	0.84	0.3	1.33	0.53	13.462	2.9	12.9	0.022	0.56	SST	N	FL
0.12	3.048	80088	1.75	44.45	0.84	0.15	0.2	0.89	1.9	48.26	1.8	8.01	0.016	0.41	MW	N	FL
0.12	3.048	80088S	1.75	44.45	0.71	0.12	0.2	0.89	1.5	38.1	1.2	5.34	0.016	0.41	SST	N	FL
0.12	3.048	80100	1.75	44.45	1.6	0.28	0.3	1.33	1.4	35.56	2.5	11.12	0.018	0.46	MW	N	FL
0.12	3.048	80100S	1.75	44.45	1.4	0.25	0.2	0.89	1.1	27.94	1.7	7.56	0.018	0.46	SST	N	FL
0.12	3.048	80112	1.75	44.45	2.9	0.51	0.4	1.78	1	25.4	3.4	15.12	0.02	0.51	MW	N	FL
0.12	3.048	80112S	1.75	44.45	2.5	0.44	0.3	1.33	0.8	20.32	2.3	10.23	0.02	0.51	SST	N	FL
0.12	3.048	80123	1.75	44.45	4.8	0.84	0.4	1.78	0.83	21.082	4.3	19.13	0.022	0.56	MW	N	FL
0.12	3.048	80123S	1.75	44.45	4	0.7	0.3	1.33	0.64	16.256	2.9	12.9	0.022	0.56	SST	N	FL
0.12	3.048	80089	2	50.8	0.69	0.12	0.2	0.89	2.3	58.42	1.8	8.01	0.016	0.41	MW	N	FL
0.12	3.048	80089S	2	50.8	0.58	0.1	0.2	0.89	1.8	45.72	1.2	5.34	0.016	0.41	SST	N	FL
0.12	3.048	80101	2	50.8	1.4	0.25	0.3	1.33	1.6	40.64	2.5	11.12	0.018	0.46	MW	N	FL
0.12	3.048	80101S	2	50.8	1.1	0.19	0.2	0.89	1.3	33.02	1.7	7.56	0.018	0.46	SST	N	FL
0.12	3.048	80113	2	50.8	2.5	0.44	0.4	1.78	1.2	30.48	3.4	15.12	0.02	0.51	MW	N	FL
0.12	3.048	80113S	2	50.8	2.1	0.37	0.3	1.33	0.95	24.13	2.3	10.23	0.02	0.51	SST	N	FL
0.12	3.048	80124	2	50.8	4.1	0.72	0.4	1.78	0.96	24.384	4.3	19.13	0.022	0.56	MW	N	FL
0.12	3.048	80124S	2	50.8	3.5	0.61	0.3	1.33	0.74	18.796	2.9	12.9	0.022	0.56	SST	N	FL
0.12	3.048	80102	2.25	57.15	1.2	0.21	0.3	1.33	1.8	45.72	2.5	11.12	0.018	0.46	MW	N	FL
0.12	3.048	80102S	2.25	57.15	1	0.18	0.2	0.89	1.4	35.56	1.7	7.56	0.018	0.46	SST	N	FL
0.12	3.048	80114	2.25	57.15	2.1	0.37	0.4	1.78	1.4	35.56	3.4	15.12	0.02	0.51	MW	N	FL
0.12	3.048	80114S	2.25	57.15	1.8	0.32	0.3	1.33	1.1	27.94	2.3	10.23	0.02	0.51	SST	N	FL
0.12	3.048	80125	2.25	57.15	3.6	0.63	0.4	1.78	1.1	27.94	4.3	19.13	0.022	0.56	MW	N	FL
0.12	3.048	80125S	2.25	57.15	3.1	0.54	0.3	1.33	0.84	21.336	2.9	12.9	0.022	0.56	SST	N	FL
0.12	3.048	80126	2.5	63.5	3.2	0.56	0.4	1.78	1.2	30.48	4.3	19.13	0.022	0.56	MW	N	FL
0.12	3.048	80126S	2.5	63.5	2.7	0.47	0.3	1.33	0.94	23.876	2.9	12.9	0.022	0.56	SST	N	FL
0.125	3.175	460	0.34	8.636	1.1	0.19	0.04	0.18	0.5	12.7	0.62	2.76	0.011	0.28	MW	Z	FL
0.125	3.175	M-60	0.34	8.636	1.2	0.21	0.06	0.27	0.6	15.24	0.8	3.56	0.012	0.3	MW	N	FL
0.125	3.175	BB-1	0.38	9.652	0.13	0.02	0.01	0.04	1.8	45.72	0.24	1.07	0.008	0.2	MW	N	FL
0.125	3.175	ZZ1-47	0.38	9.652	0.69	0.12	0.04	0.18	0.83	21.082	0.62	2.76	0.011	0.28	MW	N	FL
0.125	3.175	O-25	0.38	9.652	1.5	0.26	0.06	0.27	0.5	12.7	0.8	3.56	0.012	0.3	MW	Z	MH
0.125	3.175	A9-33	0.38	9.652	1.9	0.33	0.09	0.4	0.49	12.446	1	4.45	0.013	0.33	MW	Z	MH
0.125	3.175	B-77	0.41	10.414	1.1	0.19	0.06	0.27	0.64	16.256	0.8	3.56	0.012	0.3	MW	N	MH
0.125	3.175	M-49	0.41	10.414	5.6	0.98	0.3	1.33	0.33	8.382	2.1	9.34	0.017	0.43	MW	GI	MH
0.125	3.175	O-6	0.41	10.414	9.5	1.66	0.4	1.78	0.23	5.842	2.5	11.12	0.018	0.46	MW	N	MH
0.125	3.175	ZZ4-49	0.41	10.414	15	2.63	0.5	2.22	0.13	3.302	2.4	10.68	0.02	0.51	SST	N	FL
0.125	3.175	N-90	0.44	11.176	0.95	0.17	0.04	0.18	0.61	15.494	0.62	2.76	0.011	0.28	MW	N	FL
0.125	3.175	ZZ1-20	0.44	11.176	1.5	0.26	0.08	0.36	0.39	9.906	0.67	2.98	0.013	0.33	SST	N	MH
0.125	3.175	438	0.44	11.176	2.2	0.39	0.1	0.44	0.53	13.462	1.3	5.78	0.014	0.36	MW	Z	FL
0.125	3.175	5403	0.44	11.176	2.4	0.42	0.1	0.44	0.49	12.446	1.3	5.78	0.014	0.36	MW	N	MH
0.125	3.175	J-46	0.44	11.176	4	0.7	0.2	0.89	0.38	9.652	1.8	8.01	0.016	0.41	MW	GI	MH
0.125	3.175	5392	0.47	11.938	3.2	0.56	0.2	0.89	0.26	6.604	0.99	4.4	0.015	0.38	SST	N	MH
0.125	3.175	M-137	0.47	11.938	6.1	1.07	0.3	1.33	0.3	7.62	2.1	9.34	0.017	0.43	MW	N	FL
0.125	3.175	5430	0.5	12.7	0.63	0.11	0.04	0.18	0.58	14.732	0.4	1.78	0.011	0.28	SST	N	FL
0.125	3.175	S-500	0.5	12.7	1.2	0.21	0.08	0.36	0.47	11.938	0.67	2.98	0.013	0.33	SST	N	FL
0.125	3.175	ZZ4-22	0.5	12.7	2.5	0.44	0.2	0.89	0.51	12.954	1.4	6.23	0.015	0.38	MW	Z	MH
0.125	3.175	5406	0.5	12.7	3.6	0.63	0.2	0.89	0.42	10.668	1.8	8.01	0.016	0.41	MW	N	FL
0.125	3.175	S-501	0.5	12.7	11	1.93	0.5	2.22	0.18	4.572	2.4	10.68	0.02	0.51	SST	N	FL
0.125	3.175	5337	0.56	14.224	0.29	0.05	0.03	0.13	1.5	38.1	0.46	2.05	0.01	0.25	MW	N	SH
0.125	3.175	463	0.56	14.224	0.8	0.14	0.07	0.311	1.2	30.48	0.62	2.76	0.011	0.28	MW	Z	FL
0.125	3.175	486	0.59	14.986	0.94	0.16	0.09	0.4	0.98	24.892	1	4.45	0.013	0.33	MW	Z	MH
0.125	3.175	5396	0.63	16.002	0.26	0.05	0.03	0.13	1.7	43.18	0.46	2.05	0.01	0.25	MW	N	FL
0.125	3.175	ZZ3-23	0.63	16.002	2.7	0.47	0.2	0.89	0.56	14.224	1.8	8.01	0.016	0.41	MW	N	FL
0.125	3.175	S-502	0.63	16.002	3.6	0.63	0.3	1.33	0.34	8.636	1.5	6.67	0.017	0.43	SST	N	MH
0.125	3.175	587	0.72	18.288	0.2	0.04	0.03	0.13</td									

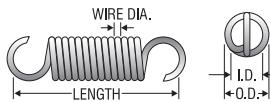


Century Spring

Extension Springs

O.D.		Century Stock Number	Length		Rate		Initial Tension		Sugg Max. Defl.		Sugg Max. load		Wire Dia.		Fns	Ends	
Inches	mm		Inches	mm	Lbs./In.	N/mm	Lbs.	N	Inches	mm	Lbs.	N	Inches	mm	Mat'l		
0.125	3.175	ZZ4-44	0.91	23.114	5.8	1.02	0.6	2.67	0.5	12.7	3.5	15.57	0.02	0.51	MW	Z	MH
0.125	3.175	ZZ3-9	0.97	24.638	1.4	0.25	0.2	0.89	0.74	18.796	1.2	5.34	0.016	0.41	SST	N	FL
0.125	3.175	A14-7	0.97	24.638	2	0.35	0.3	1.33	0.92	23.368	2.1	9.34	0.017	0.43	MW	N	FL
0.125	3.175	S-505	1	25.4	0.37	0.06	0.08	0.36	1.6	40.64	0.67	2.98	0.013	0.33	SST	N	MH
0.125	3.175	5950	1	25.4	2.3	0.4	0.3	1.33	0.62	15.748	1.7	7.56	0.018	0.46	SST	N	FL
0.125	3.175	ZZ4-46	1	25.4	2.9	0.51	0.4	1.78	0.75	19.05	2.5	11.12	0.018	0.46	MW	Z	FL
0.125	3.175	ZZ2-22	1	25.4	3.8	0.67	0.5	2.22	0.65	16.51	3	13.34	0.019	0.48	MW	N	MH
0.125	3.175	S-506	1	25.4	4.1	0.72	0.5	2.22	0.46	11.684	2.4	10.68	0.02	0.51	SST	N	MH
0.125	3.175	ZZ4-56	1	25.4	5.2	0.91	0.6	2.67	0.55	13.97	3.5	15.57	0.02	0.51	MW	N	MH
0.125	3.175	B1-17	1	25.4	6.2	1.09	0.7	3.11	0.54	13.716	4	17.79	0.021	0.53	MW	GI	FL
0.125	3.175	ZZ1-56	1.09	27.686	4.4	0.77	0.5	2.22	0.43	10.922	2.4	10.68	0.02	0.51	SST	N	MH
0.125	3.175	S-507	1.13	28.702	1.5	0.26	0.3	1.33	0.81	20.574	1.5	6.67	0.017	0.43	SST	N	FL
0.125	3.175	5908	1.13	28.702	4	0.7	0.6	2.67	0.73	18.542	3.5	15.57	0.02	0.51	MW	Z	FL
0.125	3.175	5844	1.13	28.702	6.8	1.19	0.9	4	0.56	14.224	4.7	20.91	0.022	0.56	MW	Z	FL
0.125	3.175	S-508	1.25	31.75	0.67	0.12	0.2	0.89	1.3	33.02	0.99	4.4	0.015	0.38	SST	N	MH
0.125	3.175	G-84	1.25	31.75	1.4	0.25	0.3	1.33	0.85	21.59	1.5	6.67	0.017	0.43	SST	N	FL
0.125	3.175	ZZ4-58	1.25	31.75	3.7	0.65	0.6	2.67	0.77	19.558	3.5	15.57	0.02	0.51	MW	N	MH
0.125	3.175	5953	1.25	31.75	5.4	0.95	0.8	3.56	0.47	11.938	3.3	14.68	0.022	0.56	SST	N	FL
0.125	3.175	S-509	1.31	33.274	1.4	0.25	0.3	1.33	0.88	22.352	1.5	6.67	0.017	0.43	SST	N	FL
0.125	3.175	ZZ1-53	1.38	35.052	1.3	0.23	0.3	1.33	0.94	23.876	1.5	6.67	0.017	0.43	SST	N	FL
0.125	3.175	B6-4	1.38	35.052	1.8	0.32	0.4	1.78	1.2	30.48	2.5	11.12	0.018	0.46	MW	N	FL
0.125	3.175	5951	1.38	35.052	2.8	0.49	0.5	2.22	0.67	17.018	2.4	10.68	0.02	0.51	SST	N	FL
0.125	3.175	5954	1.38	35.052	5	0.88	0.83	3.7	0.5	12.7	2.5	11.12	0.022	0.56	SST	N	FL
0.125	3.175	199-A	1.5	38.1	0.07	0.01	0.03	0.13	6	152.4	0.46	2.05	0.01	0.25	MW	Z	FL
0.125	3.175	199-B	1.5	38.1	0.19	0.03	0.06	0.27	3.8	96.52	0.8	3.56	0.012	0.3	MW	Z	MH
0.125	3.175	N-94	1.5	38.1	0.3	0.05	0.09	0.4	3.1	78.74	1	4.45	0.013	0.33	MW	N	FL
0.125	3.175	S-510	1.5	38.1	0.26	0.05	0.08	0.36	2.2	55.88	0.67	2.98	0.013	0.33	SST	N	FL
0.125	3.175	258-A	1.5	38.1	0.43	0.08	0.1	0.44	2.7	68.58	1.3	5.78	0.014	0.36	MW	Z	FL
0.125	3.175	199-C	1.5	38.1	0.65	0.11	0.2	0.89	2	50.8	1.4	6.23	0.015	0.38	MW	Z	FL
0.125	3.175	181-A	1.5	38.1	1.7	0.3	0.4	1.78	1.3	33.02	2.5	11.12	0.018	0.46	MW	Z	FL
0.125	3.175	ZZ4-21	1.5	38.1	1.5	0.26	0.3	1.33	0.96	24.384	1.7	7.56	0.018	0.46	SST	N	FL
0.125	3.175	5819	1.5	38.1	2.3	0.4	0.5	2.22	1.1	27.94	3	13.34	0.019	0.48	MW	Z	FL
0.125	3.175	S-511	1.5	38.1	2.8	0.49	0.5	2.22	0.69	17.526	2.4	10.68	0.02	0.51	SST	N	FL
0.125	3.175	5955	1.5	38.1	4.4	0.77	0.8	3.56	0.57	14.478	3.3	14.68	0.022	0.56	SST	N	FL
0.125	3.175	B3-17	1.5	38.1	7	1.23	0.75	3.34	0.59	14.966	5.4	24.02	0.023	0.58	MW	N	MH
0.125	3.175	5425	1.5	38.1	11	1.93	2	8.9	0.46	11.684	6.7	29.8	0.025	0.64	MW	N	MH
0.125	3.175	ZZ1-63	1.53	38.862	0.08	0.01	0.03	0.13	5.5	139.7	0.46	2.05	0.01	0.25	MW	Z	FL
0.125	3.175	B6-27	1.53	38.862	0.59	0.1	0.2	0.89	2.2	55.88	1.4	6.23	0.015	0.38	MW	N	MH
0.125	3.175	5400	1.56	39.624	0.2	0.04	0.06	0.27	3.6	91.44	0.8	3.56	0.012	0.3	MW	N	FL
0.125	3.175	ZZ2-57	1.56	39.624	5.3	0.93	0.9	4	0.72	18.288	4.7	20.91	0.022	0.56	MW	Z	MH
0.125	3.175	B3-15	1.63	41.402	0.16	0.03	0.06	0.27	4.6	116.84	0.8	3.56	0.012	0.3	MW	N	FL
0.125	3.175	ZZ2-5	1.63	41.402	0.4	0.07	0.1	0.44	2.9	73.66	1.3	5.78	0.014	0.36	MW	Z	FL
0.125	3.175	5956	1.63	41.402	4	0.7	0.8	3.56	0.62	15.748	3.3	14.68	0.022	0.56	SST	N	FL
0.125	3.175	S-512	1.75	44.45	0.5	0.09	0.2	0.89	1.7	43.18	0.99	4.4	0.015	0.38	SST	N	FL
0.125	3.175	M-65	1.75	44.45	0.66	0.12	0.2	0.89	1.5	38.1	1.2	5.34	0.016	0.41	SST	N	FL
0.125	3.175	ZZ4-45	1.75	44.45	2.6	0.46	0.6	2.67	1.1	27.94	3.5	15.57	0.02	0.51	MW	Z	MH
0.125	3.175	B6-26	1.75	44.45	3.2	0.56	0.7	3.11	1	25.4	4	17.79	0.021	0.53	MW	N	MH
0.125	3.175	5957	1.75	44.45	3.7	0.65	0.8	3.56	0.67	17.018	3.3	14.68	0.022	0.56	SST	N	FL
0.125	3.175	258-B	1.88	47.752	0.35	0.06	0.1	0.44	3.3	83.82	1.3	5.78	0.014	0.36	MW	Z	FL
0.125	3.175	181-B	1.88	47.752	1.3	0.23	0.4	1.78	1.6	40.64	2.5	11.12	0.018	0.46	MW	Z	FL
0.125	3.175	5958	1.88	47.752	3.4	0.6	0.8	3.56	0.73	18.542	3.3	14.68	0.022	0.56	SST	N	FL
0.125	3.175	490	1.94	49.276	11	1.93	2	8.9	0.54	13.716	7.6	33.8	0.026	0.66	MW	Z	MH
0.125	3.175	S-513	2	50.8	0.19	0.03	0.08	0.36	3.1	78.74	0.67	2.98	0.013	0.33	SST	N	FL
0.125	3.175	5843	2	50.8	2.1	0.37	0.6	2.67	1.4	35.56	3.5	15.57	0.02	0.51	MW	Z	FL
0.125	3.175	S-514	2	50.8	1.9	0.33	0.5	2.22	1	25.4	2.4	10.68	0.02	0.51	SST	N	FL
0.125	3.175	M-140	2	50.8	3.8	0.67	0.9	4	1	25.4	4.7	20.91	0.022	0.56	MW	N	MH
0.125	3.175	O-22	2.25	57.15	0.12	0.02	0.06	0.27	6.3	160.02	0.8	3.56	0.012	0.3	MW	Z	FL
0.125	3.175	258-C	2.5	63.5	0.24	0.04	0.1	0.44	4.7	119.38	1.3	5.78	0.014	0.36	MW	Z	FL
0.125	3.175	181-C	2.5	63.5	0.96	0.17	0.4	1.78	2.2	55.88	2.5	11.12	0.018	0.46	MW	Z	FL
0.125	3.175	5225	4	101.6	0.3	0.05	0.2	0.89	5.1	129.54	1.8	8.01	0.016	0.41	MW	Z	FL
0.125	3.175	5462	5.47	138.938	0.34	0.06	0.3	1.33	5.5	139.7	2.1	9.34	0.017	0.43	MW	N	MH
0.125	3.175	5247	6	152.4	0.14	0.02	0.2	0.89	8.9	226.06	1.4	6.23	0.015	0.38	MW	N	MH
0.125	3.175	5198	8	203.2	0.11	0.02	0.2	0.89	12	304.8	1.4	6.23	0.015	0.38	MW	Z	MH
0.125	3.175	585	12	304.8	0.34	0.06	0.6	2.67	8.6	218.44	3.5	15.57	0.02	0.51	MW	Z	FL
0.14	3.556	ZZ2-1	0.31	7.874	7.1	1.24	0.2	0.89	0.19	4.826	1.5	6.67	0.016	0.41	MW	N	MH
0.14	3.556	ZZ2-20	0.38	9.652	1.7	0.3	0.07	0.31	0.49	12.446	0.9	4	0.013	0.33	MW	Z	FL
0.14	3.556	ZZ2-4	0.41	10.414	0.38	0.07	0.02	0.09	1	25.4	0.41	1.82	0.				




O.D. Inches	Century Stock Number	Length Inches	Rate Lbs./In.	Initial Tension Lbs.	Sugg Max. Defl. Inches	Sugg Max. load Lbs.	Wire Dia. Inches	Mat'l	F	E							
									sh	nds							
0.14	3.556	534-A	0.88	22.352	0.77	0.13	0.1	0.44	1.5	38.1	1.3	5.78	0.015	0.38	MW	Z	MH
0.14	3.556	ZZ2-13	0.88	22.352	5.9	1.03	0.6	2.67	0.38	9.652	2.9	12.9	0.022	0.56	SST	N	FL
0.14	3.556	495	1.06	26.924	0.12	0.02	0.03	0.13	4.2	106.68	0.55	2.45	0.011	0.28	MW	Z	MH
0.14	3.556	5049	1.25	31.75	0.77	0.13	0.2	0.89	1.8	45.72	1.5	6.67	0.016	0.41	MW	Z	SH
0.14	3.556	5330	1.31	33.274	0.36	0.06	0.09	0.4	2.9	73.66	1.1	4.89	0.014	0.36	MW	Z	FL
0.14	3.556	259-A	1.5	38.1	0.3	0.05	0.1	0.44	3.5	88.9	1.1	4.89	0.014	0.36	MW	Z	MH
0.14	3.556	163-A	1.5	38.1	0.6	0.11	0.2	0.89	2.3	58.42	1.6	7.12	0.016	0.41	MW	Z	MH
0.14	3.556	5368	1.63	41.402	0.12	0.02	0.05	0.22	5.5	139.7	0.71	3.16	0.012	0.3	MW	N	FL
0.14	3.556	259-B	1.88	47.752	0.23	0.04	0.1	0.44	4.5	114.3	1.1	4.89	0.014	0.36	MW	Z	MH
0.14	3.556	163-B	1.88	47.752	0.47	0.08	0.2	0.89	3	76.2	1.6	7.12	0.016	0.41	MW	Z	MH
0.14	3.556	259-C	2.5	63.5	0.17	0.03	0.1	0.44	6.2	157.48	1.1	4.89	0.014	0.36	MW	Z	MH
0.14	3.556	0-24	2.5	63.5	0.24	0.04	0.1	0.44	4.7	119.38	1.3	5.78	0.015	0.38	MW	N	FL
0.14	3.556	163-C	2.5	63.5	0.34	0.06	0.2	0.89	4.1	104.14	1.6	7.12	0.016	0.41	MW	Z	MH
0.14	3.556	5186	4	101.6	0.53	0.09	0.3	1.33	4.3	109.22	2.6	11.56	0.019	0.48	MW	Z	FL
0.14	3.556	5131	5	127	5.3	0.93	3	13.34	1.5	38.1	10	44.48	0.03	0.76	MW	Z	MH
0.14	3.556	5213	5.94	150.876	0.78	0.14	0.6	2.67	4.4	111.76	4.1	18.24	0.022	0.56	MW	Z	MH
0.14	3.556	5190	7.88	200.152	0.14	0.02	0.2	0.89	12	304.8	1.9	8.45	0.017	0.43	MW	Z	MH
0.156	3.962	0-310	0.34	8.636	8.2	1.44	0.2	0.89	0.22	5.588	2	8.9	0.018	0.46	MW	N	MH
0.156	3.962	588	0.38	9.652	0.28	0.05	0.02	0.09	1.3	33.02	0.37	1.65	0.01	0.25	MW	Z	MH
0.156	3.962	ZZ2-12	0.38	9.652	1.2	0.21	0.05	0.22	0.65	16.51	0.82	3.65	0.013	0.33	MW	Z	FL
0.156	3.962	586	0.44	11.176	0.83	0.15	0.04	0.18	0.72	18.288	0.64	2.85	0.012	0.3	MW	Z	DL
0.156	3.962	0-26	0.5	12.7	0.16	0.03	0.02	0.09	2.2	55.88	0.37	1.65	0.01	0.25	MW	GI	FL
0.156	3.962	ZZ3-5	0.5	12.7	0.43	0.08	0.04	0.18	1.4	35.56	0.64	2.85	0.012	0.3	MW	N	FL
0.156	3.962	461	0.5	12.7	0.96	0.17	0.07	0.31	0.98	24.892	1	4.45	0.014	0.36	MW	Z	MH
0.156	3.962	5339	0.5	12.7	1.2	0.21	0.07	0.31	0.79	20.066	1	4.45	0.014	0.36	MW	N	MH
0.156	3.962	M-16	0.5	12.7	1.4	0.25	0.1	0.44	0.76	19.304	1.1	4.89	0.015	0.38	MW	Z	FL
0.156	3.962	426	0.53	13.462	0.16	0.03	0.02	0.09	2.3	58.42	0.37	1.65	0.01	0.25	MW	Z	MH
0.156	3.962	5415	0.56	14.224	0.19	0.03	0.02	0.09	1.9	48.26	0.37	1.65	0.01	0.25	MW	GI	FL
0.156	3.962	493	0.56	14.224	3.3	0.58	0.2	0.89	0.54	13.716	2	8.9	0.018	0.46	MW	Z	MH
0.156	3.962	M-42	0.56	14.224	3.2	0.56	0.2	0.89	0.55	13.97	2	8.9	0.018	0.46	MW	N	FL
0.156	3.962	5568	0.59	14.986	0.08	0.01	0.01	0.04	3.1	78.74	0.27	1.2	0.009	0.23	MW	Z	FL
0.156	3.962	A-59	0.59	14.986	0.33	0.06	0.04	0.18	1.8	45.72	0.64	2.85	0.012	0.3	MW	Z	FL
0.156	3.962	419	0.59	14.986	0.55	0.1	0.06	0.27	1.4	35.56	0.82	3.65	0.013	0.33	MW	Z	FL
0.156	3.962	5302	0.59	14.986	8.2	1.44	0.5	2.22	0.39	9.906	3.7	16.46	0.022	0.56	MW	Z	MH
0.156	3.962	M-44	0.63	16.002	1.5	0.26	0.1	0.44	0.82	20.828	1.4	6.23	0.016	0.41	MW	N	MH
0.156	3.962	ZZ1-35	0.63	16.002	5.1	0.89	0.3	1.33	0.47	11.938	2.7	12.01	0.02	0.51	MW	N	MH
0.156	3.962	B3-2	0.67	17.018	0.78	0.14	0.1	0.44	1.3	33.02	1.1	4.89	0.015	0.38	MW	Z	FL
0.156	3.962	5766	0.75	19.05	0.26	0.05	0.04	0.18	2.3	58.42	0.64	2.85	0.012	0.3	MW	Z	SH
0.156	3.962	ZZ2-23	0.78	19.812	1.1	0.19	0.1	0.44	1.1	27.94	1.4	6.23	0.016	0.41	MW	N	MH
0.156	3.962	5117	0.81	20.574	0.21	0.04	0.04	0.18	2.8	71.12	0.64	2.85	0.012	0.3	MW	N	SH
0.156	3.962	N-107	0.81	20.574	4.7	0.82	0.5	2.22	0.45	11.43	2.6	11.56	0.022	0.56	SST	N	MH
0.156	3.962	5093	0.97	24.638	8.9	1.56	0.9	4	0.48	12.192	5.1	22.68	0.025	0.64	MW	Z	MH
0.156	3.962	M-127	1	25.4	0.48	0.08	0.1	0.44	2.1	53.34	1.1	4.89	0.015	0.38	MW	N	FL
0.156	3.962	424	1.03	26.162	4.9	0.86	0.6	2.67	0.73	18.542	4.2	18.68	0.023	0.58	MW	Z	MH
0.156	3.962	5155	1.06	26.924	0.23	0.04	0.05	0.22	3.3	83.82	0.82	3.65	0.013	0.33	MW	Z	FL
0.156	3.962	436	1.06	26.924	0.34	0.06	0.08	0.36	2.8	71.12	1	4.45	0.014	0.36	MW	Z	MH
0.156	3.962	ZZ1-15	1.09	27.686	0.38	0.07	0.07	0.31	1.6	40.64	0.67	2.98	0.014	0.36	SST	N	FL
0.156	3.962	M-39	1.09	27.686	7	1.23	0.9	4	0.6	15.24	5.1	22.68	0.025	0.64	MW	Z	MH
0.156	3.962	ZZ1-70	1.13	28.702	0.03	0.01	0.01	0.04	7.8	198.12	0.27	1.2	0.009	0.23	MW	N	FL
0.156	3.962	B3-18	1.13	28.702	4.1	0.72	0.6	2.67	0.87	22.098	4.2	18.68	0.023	0.58	MW	N	MH
0.156	3.962	ZZ3-36	1.16	29.464	0.05	0.01	0.02	0.09	4.7	119.38	0.24	1.07	0.01	0.25	SST	N	FL
0.156	3.962	414	1.22	30.988	3.8	0.67	0.6	2.67	0.93	23.622	4.2	18.68	0.023	0.58	MW	Z	FL
0.156	3.962	5083	1.25	31.75	0.54	0.09	0.1	0.44	2.3	58.42	1.4	6.23	0.016	0.41	MW	Z	SL
0.156	3.962	5375	1.38	35.052	0.18	0.03	0.05	0.22	4.2	106.68	0.82	3.65	0.013	0.33	MW	N	MH
0.156	3.962	5776	1.38	35.052	0.9	0.16	0.2	0.89	2	50.8	2	8.9	0.018	0.46	MW	N	FL
0.156	3.962	260-A	1.5	38.1	0.2	0.04	0.08	0.36	4.7	119.38	1	4.45	0.014	0.36	MW	Z	MH
0.156	3.962	257-A	1.5	38.1	0.3	0.05	0.1	0.44	3.4	86.36	1.1	4.89	0.015	0.38	MW	Z	MH
0.156	3.962	164-A	1.5	38.1	1.5	0.26	0.3	1.33	1.7	43.18	2.7	12.01	0.02	0.51	MW	Z	FL
0.156	3.962	5519	1.63	41.402	7.1	1.24	1	4.45	0.75	19.05	6.6	29.36	0.027	0.69	MW	Z	MH
0.156	3.962	260-B	1.88	47.752	0.16	0.03	0.08	0.36	6	152.4	1	4.45	0.014	0.36	MW	Z	MH
0.156	3.962	257-B	1.88	47.752	0.23	0.04	0.1	0.44	4.4	111.76	1.1	4.89	0.015	0.38	MW	Z	FL
0.156	3.962	164-B	1.88	47.752	1.1	0.19	0.3	1.33	2.2	55.88	2.7	12.01	0.02	0.51	MW	Z	MH
0.156	3.962	260-C	2.5	63.5	0.12	0.02	0.08	0.36	8.2	208.28	1	4.45	0.014	0.36	MW	Z	MH
0.156	3.962	257-C	2.5	63.5	0.17	0.03	0.1	0.44	6.1	154.94	1.1	4.89	0.015	0.38	MW	Z	MH
0.156	3.962	5387	2.5	63.5	0.48	0.08	0.2	0.89	3.7	93.98	2	8.9	0.018	0.46	MW	Z	DL
0.156	3.962	164-C	2.5	63.5	0.81	0.14	0.3	1.33	3	76.2	2.7	12.01	0.02	0.51	MW	Z	FL
0.156	3.962	5771	2.56	65.024	0.47	0.08	0.2	0.89									

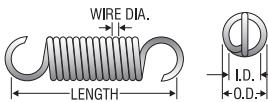


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length		Rate		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia.		Mat'l	F nsh s	
		Inches	mm	Lbs./In. N/mm					Inches	mm			
0.172	4.369	0-29	0.53	13.462	0.61	0.11	0.06	0.27	0.9	22.86	0.6	2.67	SST N FL
0.172	4.369	N-103	0.56	14.224	0.72	0.13	0.06	0.27	1.2	30.48	0.92	4.09	0.014 0.36 MW N FL
0.172	4.369	N-303	0.56	14.224	0.85	0.15	0.08	0.36	1.1	27.94	1	4.45	0.015 0.38 MW N MH
0.172	4.369	ZZ1-17	0.59	14.986	48	8.4	2	8.9	0.11	2.794	7.2	32.03	0.032 0.81 SST N FL
0.172	4.369	456	0.63	16.002	3.6	0.63	0.3	1.33	0.6	15.24	2.5	11.12	0.02 0.51 MW Z MH
0.172	4.369	ZZ4-51	0.63	16.002	16	2.8	1	4.45	0.31	7.874	5.9	26.24	0.027 0.69 MW N MH
0.172	4.369	ZZ2-31	0.69	17.526	9.6	1.68	0.7	3.11	0.27	6.858	3.3	14.68	0.025 0.64 SST N MH
0.172	4.369	5267-A	0.72	18.288	1.4	0.25	0.1	0.44	0.97	24.638	1.5	6.67	0.017 0.43 MW Z FL
0.172	4.369	B3-4	0.75	19.05	3	0.53	0.3	1.33	0.84	21.336	2.9	12.9	0.021 0.53 MW N EH
0.172	4.369	5623	0.78	19.812	18	3.15	1	4.45	0.29	7.366	6.6	29.36	0.028 0.71 MW Z EH
0.172	4.369	485	0.81	20.574	0.39	0.07	0.06	0.27	2.2	55.88	0.92	4.09	0.014 0.36 MW Z MH
0.172	4.369	420	0.94	23.876	2	0.35	0.3	1.33	1.1	27.94	2.5	11.12	0.02 0.51 MW Z MH
0.172	4.369	ZZ2-58	0.97	24.638	0.29	0.05	0.06	0.27	3	76.2	0.92	4.09	0.014 0.36 MW N FL
0.172	4.369	0-17	1.09	27.686	1.2	0.21	0.2	0.89	1	25.4	1.5	6.67	0.019 0.48 SST N MH
0.172	4.369	5705	1.13	28.702	1.6	0.28	0.3	1.33	1.4	35.56	2.5	11.12	0.02 0.51 MW Z MH
0.172	4.369	ZZ1-16	1.31	33.274	0.36	0.06	0.1	0.44	2.1	53.34	0.85	3.78	0.016 0.41 SST N FL
0.172	4.369	N-24	1.34	34.036	3.9	0.68	0.7	3.11	0.66	16.764	3.3	14.68	0.025 0.64 SST N MH
0.172	4.369	5133	2.84	72.136	0.52	0.09	0.3	1.33	4.2	106.68	2.5	11.12	0.02 0.51 MW Z FL
0.172	4.369	5107	2.88	73.152	0.51	0.09	0.3	1.33	4.3	109.22	2.5	11.12	0.02 0.51 MW Z FL
0.18	4.572	80159	0.5	12.7	9.6	1.68	0.3	1.33	0.29	7.366	3	13.34	0.022 0.56 MW N FL
0.18	4.572	80159S	0.5	12.7	8.2	1.44	0.2	0.89	0.22	5.588	2	8.9	0.022 0.56 SST N FL
0.18	4.572	80184	0.5	12.7	22	3.85	0.5	2.22	0.19	4.826	4.6	20.46	0.026 0.66 MW N FL
0.18	4.572	80184S	0.5	12.7	19	3.33	0.4	1.78	0.15	3.81	3.2	14.23	0.026 0.66 SST N FL
0.18	4.572	80209	0.5	12.7	56	9.8	0.8	3.56	0.13	3.302	7.7	34.25	0.031 0.79 MW N FL
0.18	4.572	80209S	0.5	12.7	47	8.23	0.6	2.67	0.1	2.54	5.2	23.13	0.031 0.79 SST N FL
0.18	4.572	80127	0.63	16.002	0.6	0.11	0.07	0.31	1.4	35.56	0.9	4	0.014 0.36 MW N FL
0.18	4.572	80127S	0.63	16.002	0.51	0.09	0.06	0.27	1	25.4	0.58	2.58	0.014 0.36 SST N FL
0.18	4.572	80132	0.63	16.002	2.1	0.37	0.1	0.44	0.75	19.05	1.7	7.56	0.018 0.46 MW N FL
0.18	4.572	80132S	0.63	16.002	1.7	0.3	0.1	0.44	0.58	14.732	1.1	4.89	0.018 0.46 SST N FL
0.18	4.572	80146	0.63	16.002	3.6	0.63	0.2	0.89	0.59	14.986	2.3	10.23	0.02 0.51 MW N FL
0.18	4.572	80146S	0.63	16.002	3	0.53	0.2	0.89	0.46	11.684	1.6	7.12	0.02 0.51 SST N FL
0.18	4.572	80160	0.63	16.002	5.9	1.03	0.3	1.33	0.48	12.192	3	13.34	0.022 0.56 MW N FL
0.18	4.572	80160S	0.63	16.002	5	0.88	0.2	0.89	0.37	9.398	2	8.9	0.022 0.56 SST N FL
0.18	4.572	80172	0.63	16.002	9.2	1.61	0.4	1.78	0.39	9.906	3.9	17.35	0.024 0.61 MW N FL
0.18	4.572	80172S	0.63	16.002	7.8	1.37	0.3	1.33	0.3	7.62	2.7	12.01	0.024 0.61 SST N FL
0.18	4.572	80185	0.63	16.002	14	2.45	0.5	2.22	0.3	7.62	4.6	20.46	0.026 0.66 MW N FL
0.18	4.572	80185S	0.63	16.002	12	2.1	0.4	1.78	0.24	6.096	3.2	14.23	0.026 0.66 SST N FL
0.18	4.572	80197	0.63	16.002	24	4.2	0.6	2.67	0.24	6.096	6.4	28.47	0.029 0.74 MW N FL
0.18	4.572	80197S	0.63	16.002	21	3.68	0.5	2.22	0.18	4.572	4.3	19.13	0.029 0.74 SST N FL
0.18	4.572	80210	0.63	16.002	35	6.13	0.8	3.56	0.2	5.08	7.7	34.25	0.031 0.79 MW N FL
0.18	4.572	80210S	0.63	16.002	30	5.25	1.6	7.12	0.16	4.064	5.2	23.13	0.031 0.79 SST N FL
0.18	4.572	80223	0.63	16.002	58	10.15	0.8	3.56	0.16	4.064	9.9	44.04	0.034 0.86 MW N FL
0.18	4.572	80223S	0.63	16.002	49	8.58	0.7	3.11	0.12	3.048	6.7	29.8	0.034 0.86 SST N FL
0.18	4.572	80128	0.75	19.05	0.4	0.07	0.07	0.31	2.1	53.34	0.9	4	0.014 0.36 MW N FL
0.18	4.572	80128S	0.75	19.05	0.34	0.06	0.06	0.27	1.5	38.1	0.58	2.58	0.014 0.36 SST N FL
0.18	4.572	80133	0.75	19.05	1.5	0.26	0.1	0.44	1	25.4	1.7	7.56	0.018 0.46 MW N FL
0.18	4.572	80133S	0.75	19.05	1.3	0.23	0.18	0.8	0.8	20.32	1.1	4.89	0.018 0.46 SST N FL
0.18	4.572	80147	0.75	19.05	2.7	0.47	0.2	0.89	0.78	19.812	2.3	10.23	0.02 0.51 MW N FL
0.18	4.572	80147S	0.75	19.05	2.3	0.4	0.2	0.89	0.6	15.24	1.5	6.67	0.02 0.51 SST N FL
0.18	4.572	80161	0.75	19.05	4.1	0.72	0.3	1.33	0.68	17.272	3	13.34	0.022 0.56 MW N FL
0.18	4.572	80161S	0.75	19.05	3.5	0.61	0.2	0.89	0.53	13.462	2	8.9	0.022 0.56 SST N FL
0.18	4.572	80173	0.75	19.05	6.5	1.14	0.4	1.78	0.56	14.224	3.9	17.35	0.024 0.61 MW N FL
0.18	4.572	80173S	0.75	19.05	5.5	0.96	0.3	1.33	0.43	10.922	2.7	12.01	0.024 0.61 SST N FL
0.18	4.572	80186	0.75	19.05	10	1.75	0.5	2.22	0.42	10.668	4.6	20.46	0.026 0.66 MW N FL
0.18	4.572	80186S	0.75	19.05	8.5	1.49	0.4	1.78	0.32	8.128	3.2	14.23	0.026 0.66 SST N FL
0.18	4.572	80198	0.75	19.05	18	3.15	0.6	2.67	0.32	8.128	6.4	28.47	0.029 0.74 MW N FL
0.18	4.572	80198S	0.75	19.05	15	2.63	0.5	2.22	0.25	6.35	4.3	19.13	0.029 0.74 SST N FL
0.18	4.572	80211	0.75	19.05	26	4.55	0.8	3.56	0.27	6.858	7.7	34.25	0.031 0.79 MW N FL
0.18	4.572	80211S	0.75	19.05	22	3.85	0.6	2.67	0.21	5.334	5.2	23.13	0.031 0.79 SST N FL
0.18	4.572	80224	0.75	19.05	42	7.35	0.8	3.56	0.21	5.334	9.9	44.04	0.034 0.86 MW N FL
0.18	4.572	80224S	0.75	19.05	36	6.3	0.7	3.11	0.17	4.318	6.7	29.8	0.034 0.86 SST N FL
0.18	4.572	80134	0.88	22.352	1.1	0.19	0.1	0.44	1.4	35.56	1.7	7.56	0.018 0.46 MW N FL
0.18	4.572	80134S	0.88	22.352	0.96	0.17	0.1	0.44	1.1	27.94	1.1	4.89	0.018 0.46 SST N FL
0.18	4.572	80148	0.88	22.352	1.9	0.33	0.2	0.89	1.1	27.94	2.3	10.23	0.02 0.51 MW N FL
0.18	4.572	80148S	0.88	22.352	1.6	0.28	0.2	0.89	0.86	21.844	1.6	7.12	0.02 0.51 SST N FL
0.18	4.572	80162	0.88	22.352	3.3	0.58	0.3	1.33	0.84	21.336	3	13.34	0.022 0.56 MW N FL
0.18	4.572	80162S	0.88	22.352	2.8	0.49	0.2	0.89	0.65	16.51	2	8.9	0.022 0.56 SST N FL
0.18	4.572	80174	0.88	22.352	5.1	0.89	0.4	1.78	0.71	18.034	3.9	17.35	0.024 0.61 MW N FL
0.18	4.572	80174S	0.88	22.352	4.3	0.75	0.3	1.33	0.55	13.97	2.7	12.01	0.024 0.61 SST N FL
0.18	4.572	80187	0.88	22.352	7.8	1.37	0.5	2.22	0.54	13.716	4.6	20.46	0.026 0.66 MW N FL
0.18	4.572	80187S	0.88	22.352	6.6	1.16	0.4	1.78	0.42	10.668	3.2	14.23	0.026 0.66 SST N FL
0.18	4.572	80199	0.88	22.352	14	2.45	0.6	2.67	0.41	10.414	6.4	28.47	0.029 0.74 MW N FL
0.18	4.572	80199S	0.88	22.352	12	2.1	0.5	2.22	0.32	8.128	4.3	19.13	0.029 0.74 SST N FL
0.18	4.572	80212	0.88	22.352	20	3.5	0.8	3.56	0.35	8.89	7.7	34.25	0.031 0.79 MW N FL
0.18	4.572	80212S	0.88	22.352	17	2.98							




O.D. Inches	Century Stock Number	Length Inches	Rate Lbs./In.	Initial Tension Lbs.	Sugg Max. Defl. Inches	Sugg Max. load Lbs.	Wire Dia. Inches	Mat'l	F	E							
									mm	nds							
0.18	4.572	80135S	1	25.4	0.79	0.14	0.1	0.44	1.3	33.02	1.1	4.89	0.018	0.46	SST	N	FL
0.18	4.572	80149	1	25.4	1.6	0.28	0.2	0.89	1.3	33.02	2.3	10.23	0.02	0.51	MW	N	FL
0.18	4.572	80149S	1	25.4	1.4	0.25	0.2	0.89	1	25.4	1.6	7.12	0.02	0.51	SST	N	FL
0.18	4.572	80163	1	25.4	2.7	0.47	0.3	1.33	1.1	27.94	3	13.34	0.022	0.56	MW	N	FL
0.18	4.572	80163S	1	25.4	2.3	0.4	0.2	0.89	0.81	20.574	2	8.9	0.022	0.56	SST	N	FL
0.18	4.572	80175	1	25.4	4.2	0.74	0.4	1.78	0.86	21.844	3.9	17.35	0.024	0.61	MW	N	FL
0.18	4.572	80175S	1	25.4	3.6	0.63	0.3	1.33	0.66	16.764	2.7	12.01	0.024	0.61	SST	N	FL
0.18	4.572	80188	1	25.4	6.5	1.14	0.5	2.22	0.65	16.51	4.6	20.46	0.026	0.66	MW	N	FL
0.18	4.572	80188S	1	25.4	5.5	0.96	0.4	1.78	0.51	12.954	3.2	14.23	0.026	0.66	SST	N	FL
0.18	4.572	80200	1	25.4	12	2.1	0.6	2.67	0.5	12.7	6.4	28.47	0.029	0.74	MW	N	FL
0.18	4.572	80200S	1	25.4	9.9	1.73	0.5	2.22	0.39	9.906	4.3	19.13	0.029	0.74	SST	N	FL
0.18	4.572	80213	1	25.4	17	2.98	0.8	3.56	0.41	10.414	7.7	34.25	0.031	0.79	MW	N	FL
0.18	4.572	80213S	1	25.4	14	2.45	0.6	2.67	0.32	8.128	5.2	23.13	0.031	0.79	SST	N	FL
0.18	4.572	6080	1	25.4	18	3.15	1	4.45	0.39	9.906	8.6	38.25	0.031	0.79	MW	N	FL
0.18	4.572	80226	1	25.4	28	4.9	0.8	3.56	0.33	8.382	9.9	44.04	0.034	0.86	MW	N	FL
0.18	4.572	80226S	1	25.4	23	4.03	0.7	3.11	0.26	6.604	6.7	29.8	0.034	0.86	SST	N	FL
0.18	4.572	80136	1.13	28.702	0.77	0.13	0.1	0.44	2	50.8	1.7	7.56	0.018	0.46	MW	N	FL
0.18	4.572	80136S	1.13	28.702	0.65	0.11	0.1	0.44	1.6	40.64	1.1	4.89	0.018	0.46	SST	N	FL
0.18	4.572	80150	1.13	28.702	1.4	0.25	0.2	0.89	1.6	40.64	2.3	10.23	0.02	0.51	MW	N	FL
0.18	4.572	80150S	1.13	28.702	1.1	0.19	0.2	0.89	1.2	30.48	1.6	7.12	0.02	0.51	SST	N	FL
0.18	4.572	80164	1.13	28.702	2.3	0.4	0.3	1.33	1.2	30.48	3	13.34	0.022	0.56	MW	N	FL
0.18	4.572	80164S	1.13	28.702	1.9	0.33	0.2	0.89	0.96	24.384	2	8.9	0.022	0.56	SST	N	FL
0.18	4.572	80176	1.13	28.702	3.5	0.61	0.4	1.78	1	25.4	3.9	17.35	0.024	0.61	MW	N	FL
0.18	4.572	80176S	1.13	28.702	3	0.53	0.3	1.33	0.79	20.066	2.7	12.01	0.024	0.61	SST	N	FL
0.18	4.572	80189	1.13	28.702	5.5	0.96	0.5	2.22	0.76	19.304	4.6	20.46	0.026	0.66	MW	N	FL
0.18	4.572	80189S	1.13	28.702	4.7	0.82	0.4	1.78	0.59	14.986	3.2	14.23	0.026	0.66	SST	N	FL
0.18	4.572	80201	1.13	28.702	9.8	1.72	0.6	2.67	0.58	14.732	6.4	28.47	0.029	0.74	MW	N	FL
0.18	4.572	80201S	1.13	28.702	8.4	1.47	0.5	2.22	0.46	11.684	4.3	19.13	0.029	0.74	SST	N	FL
0.18	4.572	80214	1.13	28.702	14	2.45	0.8	3.56	0.49	12.446	7.7	34.25	0.031	0.79	MW	N	FL
0.18	4.572	80214S	1.13	28.702	12	2.1	0.6	2.67	0.38	9.652	5.2	23.13	0.031	0.79	SST	N	FL
0.18	4.572	80227	1.13	28.702	24	4.2	0.8	3.56	0.38	9.652	9.9	44.04	0.034	0.86	MW	N	FL
0.18	4.572	80227S	1.13	28.702	20	3.5	0.7	3.11	0.3	7.62	6.7	29.8	0.034	0.86	SST	N	FL
0.18	4.572	80130	1.25	31.75	0.2	0.04	0.07	0.31	4.1	104.14	0.9	4	0.014	0.36	MW	N	FL
0.18	4.572	80130S	1.25	31.75	0.17	0.03	0.06	0.27	3.1	78.74	0.58	2.58	0.014	0.36	SST	N	FL
0.18	4.572	80137	1.25	31.75	0.67	0.12	0.1	0.44	2.3	58.42	1.7	7.56	0.018	0.46	MW	N	FL
0.18	4.572	80137S	1.25	31.75	0.57	0.1	0.1	0.44	1.8	45.72	1.1	4.89	0.018	0.46	SST	N	FL
0.18	4.572	80151	1.25	31.75	1.2	0.21	0.2	0.89	1.8	45.72	2.3	10.23	0.02	0.51	MW	N	FL
0.18	4.572	80151S	1.25	31.75	0.98	0.17	0.2	0.89	1.4	35.56	1.6	7.12	0.02	0.51	SST	N	FL
0.18	4.572	80165	1.25	31.75	1.9	0.33	0.3	1.33	1.5	38.1	3	13.34	0.022	0.56	MW	N	FL
0.18	4.572	80165S	1.25	31.75	1.6	0.28	0.42	1.87	1.1	27.94	2	8.9	0.022	0.56	SST	N	FL
0.18	4.572	80177	1.25	31.75	3.1	0.54	0.4	1.78	1.2	30.48	3.9	17.35	0.024	0.61	MW	N	FL
0.18	4.572	80177S	1.25	31.75	2.6	0.46	0.3	1.33	0.91	23.114	2.7	12.01	0.024	0.61	SST	N	FL
0.18	4.572	80190	1.25	31.75	4.8	0.84	0.5	2.22	0.87	22.098	4.6	20.46	0.026	0.66	MW	N	FL
0.18	4.572	80190S	1.25	31.75	4.1	0.72	0.4	1.78	0.68	17.272	3.2	14.23	0.026	0.66	SST	N	FL
0.18	4.572	80202	1.25	31.75	8.5	1.49	0.6	2.67	0.67	17.018	6.4	28.47	0.029	0.74	MW	N	FL
0.18	4.572	80202S	1.25	31.75	7.3	1.28	0.5	2.22	0.52	13.208	4.3	19.13	0.029	0.74	SST	N	FL
0.18	4.572	80215	1.25	31.75	12	2.1	0.8	3.56	0.56	14.224	7.7	34.25	0.031	0.79	MW	N	FL
0.18	4.572	80215S	1.25	31.75	11	1.93	0.6	2.22	0.44	11.176	5.2	23.13	0.031	0.79	SST	N	FL
0.18	4.572	80228	1.25	31.75	20	3.5	0.8	3.56	0.44	11.176	9.9	44.04	0.034	0.86	MW	N	FL
0.18	4.572	80228S	1.25	31.75	17	2.98	0.7	3.11	0.35	8.89	6.7	29.8	0.034	0.86	SST	N	FL
0.18	4.572	80138	1.38	35.052	0.58	0.1	0.1	0.44	2.7	68.58	1.7	7.56	0.018	0.46	MW	N	FL
0.18	4.572	80138S	1.38	35.052	0.49	0.09	0.1	0.44	2.1	53.34	1.1	4.89	0.018	0.46	SST	N	FL
0.18	4.572	80152	1.38	35.052	1	0.18	0.2	0.89	2	50.8	2.3	10.23	0.02	0.51	MW	N	FL
0.18	4.572	80152S	1.38	35.052	0.88	0.15	0.2	0.89	1.6	40.64	1.6	7.12	0.02	0.51	SST	N	FL
0.18	4.572	80166	1.38	35.052	1.7	0.3	0.3	1.33	1.6	40.64	3	13.34	0.022	0.56	MW	N	FL
0.18	4.572	80166S	1.38	35.052	1.4	0.25	0.2	0.89	1.3	33.02	2	8.9	0.022	0.56	SST	N	FL
0.18	4.572	80178	1.38	35.052	2.7	0.47	0.4	1.78	1.3	33.02	3.9	17.35	0.024	0.61	MW	N	FL
0.18	4.572	80178S	1.38	35.052	2.3	0.4	0.3	1.33	1	25.4	2.7	12.01	0.024	0.61	SST	N	FL
0.18	4.572	80191	1.38	35.052	4.3	0.75	0.5	2.22	0.99	25.146	4.6	20.46	0.026	0.66	MW	N	FL
0.18	4.572	80191S	1.38	35.052	3.6	0.63	0.4	1.78	0.77	19.558	3.2	14.23	0.026	0.66	SST	N	FL
0.18	4.572	80203	1.38	35.052	7.6	1.33	0.6	2.67	0.76	19.304	6.4	28.47	0.029	0.74	MW	N	FL
0.18	4.572	80203S	1.38	35.052	6.4	1.12	0.5	2.22	0.59	14.986	4.3	19.13	0.029	0.74	SST	N	FL
0.18	4.572	80216	1.38	35.052	11	1.93	0.8	3.56	0.63	16.002	7.7	34.25	0.031	0.79	MW	N	FL
0.18	4.572	80216S	1.38	35.052	9.4	1.65	0.6	2.67	0.49	12.446	5.2	23.13	0.031	0.79	SST	N	FL
0.18	4.572	80229	1.38	35.052	18	3.15	0.8	3.56	0.5	12.7	9.9	44.04	0.034	0.86	MW	N	FL
0.18	4.572	80229S	1.38	35.052	16	2.8	0.7	3.11	0.39	9.906	6.7	29.8	0.034	0.86	SST	N	FL
0.18	4.572	80131	1.5	38.1	0.1	0.02	0.07	0.31	8.3	210.82							

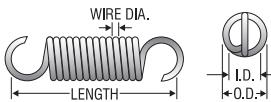


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm	Rate Lbs./In. N/mm	Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm	Mat'l	F nsh s								
0.18	4.572	80217	1.5	38.1	9.9	1.73	0.8	3.56	0.71	18,034	7.7	34.25	0.031	0.79	MW	N	FL
0.18	4.572	80217S	1.5	38.1	8.4	1.47	0.6	2.67	0.55	13.97	5.2	23.13	0.031	0.79	SST	N	FL
0.18	4.572	80230	1.5	38.1	16	2.8	0.8	3.56	0.55	13.97	9.9	44.04	0.034	0.86	MW	N	FL
0.18	4.572	80230S	1.5	38.1	14	2.45	0.7	3.11	0.43	10,922	6.7	29.8	0.034	0.86	SST	N	FL
0.18	4.572	80140	1.63	41.402	0.45	0.08	0.1	0.44	3.4	86.36	1.7	7.56	0.018	0.46	MW	N	FL
0.18	4.572	80140S	1.63	41.402	0.38	0.07	0.1	0.44	2.7	68.58	1.1	4.89	0.018	0.46	SST	N	FL
0.18	4.572	80141	1.75	44.45	0.46	0.08	0.1	0.44	3.4	86.36	1.7	7.56	0.018	0.46	MW	N	FL
0.18	4.572	80141S	1.75	44.45	0.39	0.07	0.1	0.44	2.6	66.04	1.1	4.89	0.018	0.46	SST	N	FL
0.18	4.572	80154	1.75	44.45	0.76	0.13	0.2	0.89	2.8	71.12	2.3	10.23	0.02	0.51	MW	N	FL
0.18	4.572	80154S	1.75	44.45	0.65	0.11	0.2	0.89	2.1	53.34	1.6	7.12	0.02	0.51	SST	N	FL
0.18	4.572	80168	1.75	44.45	1.3	0.23	0.3	1.33	2.2	55.88	3	13.34	0.022	0.56	MW	N	FL
0.18	4.572	80168S	1.75	44.45	1.1	0.19	0.2	0.89	1.7	43.18	2	8.9	0.022	0.56	SST	N	FL
0.18	4.572	80180	1.75	44.45	2	0.35	0.4	1.78	1.8	45.72	3.9	17.35	0.024	0.61	MW	N	FL
0.18	4.572	80180S	1.75	44.45	1.7	0.3	0.3	1.33	1.4	35.56	2.7	12.01	0.024	0.61	SST	N	FL
0.18	4.572	80193	1.75	44.45	3.1	0.54	0.5	2.22	1.4	35.56	4.6	20.46	0.026	0.66	MW	N	FL
0.18	4.572	80193S	1.75	44.45	2.6	0.46	0.4	1.78	1.1	27.94	3.2	14.23	0.026	0.66	SST	N	FL
0.18	4.572	80205	1.75	44.45	5.6	0.98	0.6	2.67	1	25.4	6.4	28.47	0.029	0.74	MW	N	FL
0.18	4.572	80205S	1.75	44.45	4.8	0.84	0.5	2.22	0.8	20.32	4.3	19.13	0.029	0.74	SST	N	FL
0.18	4.572	80218	1.75	44.45	8.2	1.44	0.8	3.56	0.85	21.59	7.7	34.25	0.031	0.79	MW	N	FL
0.18	4.572	80218S	1.75	44.45	7	1.23	0.6	2.67	0.66	16,764	5.2	23.13	0.031	0.79	SST	N	FL
0.18	4.572	80231	1.75	44.45	14	2.45	0.8	3.56	0.67	17,018	9.9	44.04	0.034	0.86	MW	N	FL
0.18	4.572	80231S	1.75	44.45	12	2.1	0.7	3.11	0.52	13,208	6.7	29.8	0.034	0.86	SST	N	FL
0.18	4.572	80142	1.88	47.752	0.38	0.07	0.1	0.44	4.1	104.14	1.7	7.56	0.018	0.46	MW	N	FL
0.18	4.572	80142S	1.88	47.752	0.32	0.06	0.1	0.44	3.2	81.28	1.1	4.89	0.018	0.46	SST	N	FL
0.18	4.572	80155	1.88	47.752	0.66	0.12	0.2	0.89	3.2	81.28	2.3	10.23	0.02	0.51	MW	N	FL
0.18	4.572	80155S	1.88	47.752	0.56	0.1	0.2	0.89	2.5	63.5	1.6	7.12	0.02	0.51	SST	N	FL
0.18	4.572	80143	2	50.8	0.38	0.07	0.1	0.44	4.1	104.14	1.7	7.56	0.018	0.46	MW	N	FL
0.18	4.572	80143S	2	50.8	0.32	0.06	0.1	0.44	3.2	81.28	1.1	4.89	0.018	0.46	SST	N	FL
0.18	4.572	80156	2	50.8	0.66	0.12	0.2	0.89	3.2	81.28	2.3	10.23	0.02	0.51	MW	N	FL
0.18	4.572	80156S	2	50.8	0.56	0.1	0.2	0.89	2.5	63.5	1.6	7.12	0.02	0.51	SST	N	FL
0.18	4.572	80169	2	50.8	1.1	0.19	0.3	1.33	2.5	63.5	3	13.34	0.022	0.56	MW	N	FL
0.18	4.572	80169S	2	50.8	0.94	0.16	0.2	0.89	2	50.8	2	8.9	0.022	0.56	SST	N	FL
0.18	4.572	80181	2	50.8	1.7	0.3	0.4	1.78	2.1	53.34	3.9	17.35	0.024	0.61	MW	N	FL
0.18	4.572	80181S	2	50.8	1.5	0.26	0.3	1.33	1.6	40.64	2.7	12.01	0.024	0.61	SST	N	FL
0.18	4.572	80194	2	50.8	2.7	0.47	0.5	2.22	1.6	40.64	4.6	20.46	0.026	0.66	MW	N	FL
0.18	4.572	80194S	2	50.8	2.3	0.4	0.4	1.78	1.2	30.48	3.2	14.23	0.026	0.66	SST	N	FL
0.18	4.572	80206	2	50.8	4.8	0.84	0.6	2.67	1.2	30.48	6.4	28.47	0.029	0.74	MW	N	FL
0.18	4.572	80206S	2	50.8	4.1	0.72	0.5	2.22	0.94	23,876	4.3	19.13	0.029	0.74	SST	N	FL
0.18	4.572	80219	2	50.8	7.1	1.24	0.8	3.56	0.99	25,146	7.7	34.25	0.031	0.79	MW	N	FL
0.18	4.572	80219S	2	50.8	6	1.05	0.6	2.67	0.77	19,558	5.2	23.13	0.031	0.79	SST	N	FL
0.18	4.572	80232	2	50.8	12	2.1	0.8	3.56	0.78	19,812	9.9	44.04	0.034	0.86	MW	N	FL
0.18	4.572	80232S	2	50.8	9.9	1.73	0.7	3.11	0.61	15,494	6.7	29.8	0.034	0.86	SST	N	FL
0.18	4.572	80144	2.25	57.15	0.3	0.05	0.1	0.44	5.1	129.54	1.7	7.56	0.018	0.46	MW	N	FL
0.18	4.572	80144S	2.25	57.15	0.26	0.05	0.1	0.44	4	101.6	1.1	4.89	0.018	0.46	SST	N	FL
0.18	4.572	80157	2.25	57.15	0.57	0.1	0.2	0.89	3.7	93.98	2.3	10.23	0.02	0.51	MW	N	FL
0.18	4.572	80157S	2.25	57.15	0.48	0.08	0.2	0.89	2.9	73.66	1.6	7.12	0.02	0.51	SST	N	FL
0.18	4.572	80170	2.25	57.15	0.95	0.17	0.3	1.33	2.9	73.66	3	13.34	0.022	0.56	MW	N	FL
0.18	4.572	80170S	2.25	57.15	0.8	0.14	0.2	0.89	2.3	58.42	2	8.9	0.022	0.56	SST	N	FL
0.18	4.572	80182	2.25	57.15	1.5	0.26	0.4	1.78	2.4	60.96	3.9	17.35	0.024	0.61	MW	N	FL
0.18	4.572	80182S	2.25	57.15	1.3	0.23	0.3	1.33	1.8	45.72	2.7	12.01	0.024	0.61	SST	N	FL
0.18	4.572	80195	2.25	57.15	2.3	0.4	0.5	2.22	1.8	45.72	4.6	20.46	0.026	0.66	MW	N	FL
0.18	4.572	80195S	2.25	57.15	2	0.35	0.4	1.78	1.4	35.56	3.2	14.23	0.026	0.66	SST	N	FL
0.18	4.572	80207	2.25	57.15	4.2	0.74	0.6	2.67	1.4	35.56	6.4	28.47	0.029	0.74	MW	N	FL
0.18	4.572	80207S	2.25	57.15	3.6	0.63	0.5	2.22	1.1	27.94	4.3	19.13	0.029	0.74	SST	N	FL
0.18	4.572	80220	2.25	57.15	6.1	1.07	0.8	3.56	1.1	27.94	7.7	34.25	0.031	0.79	MW	N	FL
0.18	4.572	80220S	2.25	57.15	5.2	0.91	0.6	2.67	0.89	22,606	5.2	23.13	0.031	0.79	SST	N	FL
0.18	4.572	80233	2.25	57.15	10	1.75	0.8	3.56	0.89	22,606	9.9	44.04	0.034	0.86	MW	N	FL
0.18	4.572	80233S	2.25	57.15	8.6	1.51	0.7	3.11	0.7	17,78	6.7	29.8	0.034	0.86	SST	N	FL
0.18	4.572	80145	2.5	63.5	0.29	0.05	0.1	0.44	5.4	137.16	1.7	7.56	0.018	0.46	MW	N	FL
0.18	4.572	80145S	2.5	63.5	0.24	0.04	0.1	0.44	4.2	106.68	1.1	4.89	0.018	0.46	SST	N	FL
0.18	4.572	80158	2.5	63.5	0.49	0.09	0.2	0.89	4.3	109.22	2.3	10.23	0.02	0.51	MW	N	FL
0.18	4.572	80158S	2.5	63.5	0.41	0.07	0.2	0.89	3.4	86.36	1.6	7.12	0.02	0.51	SST	N	FL
0.18	4.572	80171	2.5	63.5	0.84	0.15	0.3	1.33	3.3	83.82	3	13.34	0.022	0.56	MW	N	FL
0.18	4.572	80171S	2.5	63.5	0.71	0.12	0.2	0.89	2.6	66.04	2	8.9	0.022	0.56	SST	N	FL
0.18	4.572	80183	2.5	63.5	1.3	0.23	0.4	1.78	2.7	68.58	3.9	17.35	0.024	0.61	MW	N	FL
0.18	4.572	80183S	2.5	63.5	1.1	0.19	0.3	1.33	2.1	53.34	2.7	12.01	0.024	0.61	SST	N	FL
0.18	4.572	80196	2.5	63.5	2	0.35	0.5	2.22	2.1	53.34	4.6	20.46	0.026	0.66	SST	N	FL
0.18	4.572	80196S	2.5	63.5	1.7	0.3	0.4	1.78	1.6	40.64	3.2	14.23	0.026	0.66	SST	N	FL
0.18	4.572	80208	2.5	63.5	3.7												




O.D. Inches	Century Stock Number	Length Inches	Rate Lbs./In.	Initial Tension Lbs.	Sugg Max. Defl. Inches	Sugg Max. load Lbs.	Wire Dia. Inches	Mat'l	F	E							
									mm	nds							
0.188	4.775	0-121	0.41	10.414	5.2	0.91	0.2	0.89	0.34	8.636	1.9	8.45	0.019	0.48	MW	N	MH
0.188	4.775	5422	0.44	11.176	1.8	0.32	0.09	0.4	0.59	14.986	1.2	5.34	0.016	0.41	MW	N	FL
0.188	4.775	B3-1	0.44	11.176	5.5	0.96	0.3	1.33	0.42	10.668	2.6	11.56	0.021	0.53	MW	Z	FL
0.188	4.775	ZZ1-28	0.47	11.938	43	7.53	1	4.45	0.16	4.064	8.2	36.47	0.031	0.79	MW	GI	MH
0.188	4.775	B3-7	0.5	12.7	0.31	0.05	0.04	0.18	1.3	33.02	0.44	1.96	0.013	0.33	SST	N	MH
0.188	4.775	ZZ3-11	0.5	12.7	0.83	0.15	0.05	0.22	0.6	15.24	0.55	2.45	0.014	0.36	SST	N	FL
0.188	4.775	S-515	0.5	12.7	0.74	0.13	0.06	0.27	0.78	19.812	0.64	2.85	0.015	0.38	SST	N	MH
0.188	4.775	M-43	0.5	12.7	4.1	0.72	0.2	0.89	0.43	10.922	1.9	8.45	0.019	0.48	MW	Z	FL
0.188	4.775	J-45	0.5	12.7	5.4	0.95	0.2	0.89	0.38	9.652	2.2	9.79	0.02	0.51	MW	Z	FL
0.188	4.775	552	0.5	12.7	17	2.98	0.6	2.67	0.21	5.334	4.2	18.68	0.025	0.64	MW	Z	MH
0.188	4.775	5175	0.5	12.7	54	9.45	1	4.45	0.11	2.794	7.4	32.92	0.03	0.76	MW	Z	MH
0.188	4.775	B3-11	0.5	12.7	35	6.13	1	4.45	0.19	4.826	8.2	36.47	0.031	0.79	MW	N	FL
0.188	4.775	A-46	0.53	13.462	0.78	0.14	0.05	0.22	1	25.4	0.84	3.74	0.014	0.36	MW	N	MH
0.188	4.775	5700	0.53	13.462	0.89	0.16	0.07	0.31	0.98	24.892	0.95	4.23	0.015	0.38	MW	Z	MH
0.188	4.775	5701	0.56	14.224	1.1	0.19	0.09	0.4	0.94	23.876	1.2	5.34	0.016	0.41	MW	N	MH
0.188	4.775	5417	0.56	14.224	1.5	0.26	0.1	0.44	0.82	20.828	1.4	6.23	0.017	0.43	MW	Z	MH
0.188	4.775	487	0.56	14.224	2.9	0.51	0.2	0.89	0.69	17.526	2.2	9.79	0.02	0.51	MW	Z	MH
0.188	4.775	5393	0.56	14.224	2.5	0.44	0.2	0.89	0.81	20.574	2.2	9.79	0.02	0.51	MW	Z	MH
0.188	4.775	N-92	0.56	14.224	6.5	1.14	0.4	1.78	0.31	7.874	2.4	10.68	0.023	0.58	SST	N	MH
0.188	4.775	ZZ1-43	0.56	14.224	49	8.58	1	4.45	0.14	3.556	8.2	36.47	0.031	0.79	MW	Z	MH
0.188	4.775	5408	0.59	14.986	3.6	0.63	0.2	0.89	0.56	14.224	2.2	9.79	0.02	0.51	MW	N	MH
0.188	4.775	ZZ1-7	0.59	14.986	3	0.53	0.2	0.89	0.45	11.43	1.5	6.67	0.02	0.51	SST	N	MH
0.188	4.775	499	0.59	14.986	8.6	1.51	0.6	2.67	0.42	10.668	4.2	18.68	0.025	0.64	MW	Z	MH
0.188	4.775	A10-52	0.63	16.002	0.12	0.02	0.02	0.09	3.3	83.82	0.41	1.82	0.011	0.28	MW	N	FL
0.188	4.775	5398	0.63	16.002	0.2	0.04	0.03	0.13	2.6	66.04	0.53	2.36	0.012	0.3	MW	N	MH
0.188	4.775	ZZ1-45	0.63	16.002	0.68	0.12	0.05	0.22	1.2	30.48	0.84	3.74	0.014	0.36	MW	N	FL
0.188	4.775	ZZ1-41	0.63	16.002	1.3	0.23	0.1	0.44	0.64	16.256	0.95	4.23	0.017	0.43	SST	N	FL
0.188	4.775	5179	0.63	16.002	1.7	0.3	0.1	0.44	0.89	22.606	1.6	7.12	0.018	0.46	MW	Z	MH
0.188	4.775	5420	0.63	16.002	2.4	0.42	0.2	0.89	0.83	21.082	2.2	9.79	0.02	0.51	MW	Z	FL
0.188	4.775	M-9	0.63	16.002	2.5	0.44	0.2	0.89	0.81	20.574	2.2	9.79	0.02	0.51	MW	Z	FL
0.188	4.775	6075	0.63	16.002	8.5	1.49	0.6	2.67	0.28	7.112	3	13.34	0.025	0.64	SST	N	FL
0.188	4.775	12532	0.63	16.002	9.4	1.65	0.7	3.11	0.43	10.922	4.8	21.35	0.026	0.66	MW	GI	MH
0.188	4.775	ZZ1-14	0.63	16.002	27	4.73	1	4.45	0.16	4.064	5.8	25.8	0.031	0.79	SST	N	MH
0.188	4.775	N-113	0.66	16.764	0.25	0.04	0.04	0.18	2.6	66.04	0.67	2.98	0.013	0.33	MW	Z	MH
0.188	4.775	M-17	0.66	16.764	0.53	0.09	0.07	0.31	1.7	43.18	0.94	4.18	0.015	0.38	MW	N	FL
0.188	4.775	O-111	0.69	17.526	0.56	0.1	0.07	0.31	1.6	40.64	0.94	4.18	0.015	0.38	MW	BO	FL
0.188	4.775	5513	0.69	17.526	6.8	1.19	0.5	2.22	0.51	12.954	3.9	17.35	0.024	0.61	MW	N	MH
0.188	4.775	ZZ2-49	0.69	17.526	7.8	1.37	0.6	2.67	0.47	11.938	4.2	18.68	0.025	0.64	MW	N	FL
0.188	4.775	B3-6	0.72	18.288	0.42	0.07	0.07	0.31	2.1	53.34	0.94	4.18	0.015	0.38	MW	N	FL
0.188	4.775	6073	0.73	18.542	17	2.98	1	4.45	0.21	5.334	4.7	20.91	0.029	0.74	SST	N	EH
0.188	4.775	469	0.75	19.05	0.2	0.04	0.04	0.18	3.2	81.28	0.67	2.98	0.013	0.33	MW	Z	MH
0.188	4.775	S-516	0.75	19.05	0.36	0.06	0.06	0.27	1.6	40.64	0.64	2.85	0.015	0.38	SST	N	MH
0.188	4.775	ZZ3-13	0.75	19.05	0.61	0.11	0.08	0.36	1.2	30.48	0.78	3.47	0.016	0.41	SST	N	FL
0.188	4.775	6071	0.75	19.05	0.9	0.16	0.1	0.44	1.1	27.94	1.1	4.89	0.018	0.46	SST	N	MH
0.188	4.775	6047	0.75	19.05	1.4	0.25	0.2	0.89	1.3	33.02	1.9	8.45	0.019	0.48	MW	Z	FL
0.188	4.775	5397	0.75	19.05	3.7	0.65	0.3	1.33	0.73	18.542	3	13.34	0.022	0.56	MW	Z	MH
0.188	4.775	5775	0.75	19.05	16	2.8	0.9	4	0.21	5.334	4.2	18.68	0.028	0.71	SST	N	MH
0.188	4.775	B3-9	0.78	19.812	10.3	1.8	0.5	2.22	0.76	19.304	3.9	17.35	0.024	0.61	MW	GI	EH
0.188	4.775	ZZ3-24	0.78	19.812	7.9	1.38	0.6	2.67	0.46	11.684	4.2	18.68	0.025	0.64	MW	BO	MH
0.188	4.775	5511	0.81	20.574	0.83	0.15	0.1	0.44	1.5	38.1	1.4	6.23	0.017	0.43	MW	Z	MH
0.188	4.775	ZZ2-29	0.84	21.336	3.1	0.54	0.3	1.33	0.87	22.098	3	13.34	0.022	0.56	MW	Z	MH
0.188	4.775	S-517	0.88	22.352	0.61	0.11	0.1	0.44	1.4	35.56	0.95	4.23	0.017	0.43	SST	N	FL
0.188	4.775	ZZ2-45	0.94	23.876	0.21	0.04	0.05	0.22	3.8	96.52	0.84	3.74	0.014	0.36	MW	Z	FL
0.188	4.775	470	0.94	23.876	0.32	0.06	0.07	0.31	2.7	68.58	0.94	4.18	0.015	0.38	MW	Z	SL
0.188	4.775	5361	0.94	23.876	0.71	0.12	0.1	0.44	1.8	45.72	1.4	6.23	0.017	0.43	MW	N	MH
0.188	4.775	ZZ2-8	0.94	23.876	0.72	0.13	0.1	0.44	1.8	45.72	1.4	6.23	0.017	0.43	MW	N	MH
0.188	4.775	5316	0.94	23.876	3.4	0.6	0.4	1.78	0.88	22.352	3.5	15.57	0.023	0.58	MW	Z	FL
0.188	4.775	B3-13	1	25.4	0.91	0.16	0.2	0.89	1.9	48.26	1.9	8.45	0.019	0.48	MW	Z	FL
0.188	4.775	6057	1	25.4	1.4	0.25	0.3	1.33	1.1	27.94	1.8	8.01	0.021	0.53	SST	N	FL
0.188	4.775	5304	1	25.4	2.3	0.4	0.3	1.33	1.2	30.48	3	13.34	0.022	0.56	MW	Z	MH
0.188	4.775	S-518	1	25.4	4.7	0.82	0.6	2.67	0.58	14.732	3.4	15.12	0.026	0.66	SST	N	MH
0.188	4.775	M-58	1.06	26.924	2.6	0.46	0.4	1.78	1.2	30.48	3.5	15.57	0.023	0.58	MW	N	FL
0.188	4.775	S-519	1.13	28.702	0.21	0.04	0.06	0.27	2.7	68.58	0.64	2.85	0.015	0.38	SST	N	FL
0.188	4.775	B3-59	1.13	28.702	3.4	0.6	0.5	2.22	1	25.4	3.9	17.35	0.024	0.61	MW	Z	MH
0.188	4.775	12799	1.13	28.702	4.3	0.75	0.7	3.11	0.63	16.002	3.4	15.12	0.026	0.66	SST	N	FL
0.188	4.775	453	1.19	30.226	0.18	0.03	0.05	0.22	4.5	114.3	0.84	3.74	0.014	0.36	MW	Z	FL
0.188	4.7																

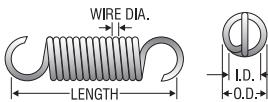


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm		Rate Lbs./In. N/mm		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm		Mat'l	F ns h e nds					
		Inches	mm	Lbs./In.	N/mm				Inches	mm							
0.188	4.775	12536	1.44	36.576	48	8.4	6	26.69	0.31	7.874	21	93.41	0.042	1.07	MW	N	MH
0.188	4.775	459	1.47	37.338	2.7	0.47	0.6	2.67	1.3	33.02	4.2	18.68	0.025	0.64	MW	Z	EH
0.188	4.775	491	1.47	37.338	4.3	0.75	0.8	3.56	1.1	27.94	5.3	23.57	0.027	0.69	MW	Z	MH
0.188	4.775	165-A	1.5	38.1	0.17	0.03	0.07	0.31	5.1	129.54	0.94	4.18	0.015	0.38	MW	Z	FL
0.188	4.775	166-A	1.5	38.1	0.23	0.04	0.09	0.4	4.5	114.3	1.1	4.89	0.016	0.41	MW	Z	MH
0.188	4.775	252-A	1.5	38.1	0.45	0.08	0.1	0.44	3.3	83.82	1.6	7.12	0.018	0.46	MW	Z	MH
0.188	4.775	251-A	1.5	38.1	0.83	0.15	0.2	0.89	2.4	60.96	2.2	9.79	0.02	0.51	MW	Z	FL
0.188	4.775	5402	1.5	38.1	1.4	0.25	0.3	1.33	1.9	48.26	3	13.34	0.022	0.56	MW	N	MH
0.188	4.775	5200	1.5	38.1	1.9	0.33	0.4	1.78	1.6	40.64	3.5	15.57	0.023	0.58	MW	Z	FL
0.188	4.775	167-A	1.5	38.1	2.6	0.46	0.6	2.67	1.4	35.56	4.2	18.68	0.025	0.64	MW	Z	FL
0.188	4.775	S-523	1.5	38.1	2.8	0.49	0.6	2.67	0.97	24.638	3.4	15.12	0.026	0.66	SST	N	MH
0.188	4.775	444	1.53	38.862	1	0.18	0.3	1.33	2.3	58.42	2.6	11.56	0.021	0.53	MW	Z	MH
0.188	4.775	ZZ3-15	1.56	39.624	7.5	1.31	1	4.45	0.6	15.24	5.8	25.8	0.031	0.79	SST	N	MH
0.188	4.775	S-524	1.63	41.402	0.61	0.11	0.2	0.89	2.2	55.88	1.5	6.67	0.02	0.51	SST	N	FL
0.188	4.775	5253	1.69	42.926	2.4	0.42	0.6	2.67	1.5	38.1	4.2	18.68	0.025	0.64	MW	Z	MH
0.188	4.775	S-525	1.75	44.45	0.25	0.04	0.1	0.44	3.4	86.36	0.95	4.23	0.017	0.43	SST	N	MH
0.188	4.775	S-526	1.75	44.45	2.3	0.4	0.6	2.67	1.2	30.48	3.4	15.12	0.026	0.66	SST	N	MH
0.188	4.775	423	1.78	45.212	0.66	0.12	0.2	0.89	3.1	78.74	2.2	9.79	0.02	0.51	MW	Z	MH
0.188	4.775	165-B	1.88	47.752	0.13	0.02	0.07	0.31	6.7	170.18	0.94	4.18	0.015	0.38	MW	Z	MH
0.188	4.775	166-B	1.88	47.752	0.18	0.03	0.09	0.4	5.9	149.86	1.1	4.89	0.016	0.41	MW	Z	FL
0.188	4.775	252-B	1.88	47.752	0.34	0.06	0.1	0.44	4.4	111.76	1.6	7.12	0.018	0.46	MW	Z	FL
0.188	4.775	251-B	1.88	47.752	0.6	0.11	0.2	0.89	3.4	86.36	2.2	9.79	0.02	0.51	MW	Z	FL
0.188	4.775	ZZ1-50	1.88	47.752	0.66	0.12	0.2	0.89	3.1	78.74	2.2	9.79	0.02	0.51	MW	N	FL
0.188	4.775	167-B	1.88	47.752	2	0.35	0.6	2.67	1.8	45.72	4.2	18.68	0.025	0.64	MW	Z	FL
0.188	4.775	537	1.88	47.752	5.4	0.95	1	4.45	1.1	27.94	7.4	32.92	0.03	0.76	MW	Z	MH
0.188	4.775	553	1.88	47.752	9.8	1.72	2	8.9	0.76	19.304	9.4	41.81	0.037	0.94	PR	N	MH
0.188	4.775	5187	1.94	49.276	1.3	0.23	0.4	1.78	2.4	60.96	3.5	15.57	0.023	0.58	MW	Z	MH
0.188	4.775	ZZ4-30	1.97	50.038	0.99	0.17	0.3	1.33	2.7	68.58	3	13.34	0.022	0.56	MW	Z	MH
0.188	4.775	5664	1.97	50.038	1.3	0.23	0.4	1.78	2.4	60.96	3.5	15.57	0.023	0.58	MW	Z	MH
0.188	4.775	S-527	2	50.8	0.47	0.08	0.2	0.89	2.8	71.12	1.5	6.67	0.02	0.51	SST	N	FL
0.188	4.775	ZZ3-33	2	50.8	0.6	0.11	0.2	0.89	3.4	86.36	2.2	9.79	0.02	0.51	MW	Z	MH
0.188	4.775	5684	2	50.8	0.94	0.16	0.3	1.33	2.8	71.12	3	13.34	0.022	0.56	MW	Z	MH
0.188	4.775	6085	2	50.8	11	1.93	2	8.9	0.8	20.32	11	48.93	0.034	0.86	MW	Z	MH
0.188	4.775	5256	2.25	57.15	1.1	0.19	0.4	1.78	2.8	71.12	3.5	15.57	0.023	0.58	MW	Z	MH
0.188	4.775	ZZ3-70	2.25	57.15	5.6	0.98	1	4.45	1.2	30.48	8.2	36.47	0.031	0.79	MW	N	MH
0.188	4.775	ZZ3-69	2.38	60.452	4.5	0.79	1	4.45	0.98	24.892	5.8	25.8	0.031	0.79	SST	N	MH
0.188	4.775	5252	2.47	62.738	0.96	0.17	0.4	1.78	3.2	81.28	3.5	15.57	0.023	0.58	MW	Z	FL
0.188	4.775	165-C	2.5	63.5	0.09	0.02	0.07	0.31	9.3	236.22	0.94	4.18	0.015	0.38	MW	Z	MH
0.188	4.775	166-C	2.5	63.5	0.14	0.02	0.09	0.4	7.8	198.12	1.1	4.89	0.016	0.41	MW	Z	FL
0.188	4.775	252-C	2.5	63.5	0.25	0.04	0.1	0.44	6	152.4	1.6	7.12	0.018	0.46	MW	Z	FL
0.188	4.775	251-C	2.5	63.5	0.44	0.08	0.2	0.89	4.7	119.38	2.2	9.79	0.02	0.51	MW	Z	FL
0.188	4.775	167-C	2.5	63.5	1.5	0.26	0.6	2.67	2.5	63.5	4.2	18.68	0.025	0.64	MW	Z	FL
0.188	4.775	0-9	3	76.2	2.6	0.46	1	4.45	2.1	53.34	6.6	29.36	0.029	0.74	MW	N	FL
0.188	4.775	536	3.06	77.724	3.8	0.67	1	4.45	1.8	45.72	8.2	36.47	0.031	0.79	MW	Z	MH
0.188	4.775	5371	3.31	84.074	0.35	0.06	0.2	0.89	5.8	147.32	2.2	9.79	0.02	0.51	MW	Z	MH
0.188	4.775	ZZ4-65	3.44	87.376	0.41	0.07	0.3	1.33	5.8	147.32	2.6	11.56	0.021	0.53	MW	Z	MH
0.188	4.775	5192-A	3.88	98.552	0.9	0.16	0.6	2.67	4.1	104.14	4.2	18.68	0.025	0.64	MW	Z	FL
0.188	4.775	108	5	127	0.44	0.08	0.4	1.78	6.9	175.26	3.5	15.57	0.023	0.58	MW	Z	MH
0.188	4.775	5163	5	127	0.44	0.08	0.4	1.78	7	177.8	3.5	15.57	0.023	0.58	MW	Z	FL
0.188	4.775	B7-64	5.03	127.762	4.4	0.77	3	13.34	1.5	38.1	8.9	39.59	0.035	0.89	SPR	N	FL
0.188	4.775	5196	6	152.4	0.36	0.06	0.4	1.78	8.5	215.9	3.5	15.57	0.023	0.58	MW	Z	MH
0.188	4.775	5208	7.88	200.152	0.43	0.08	0.6	2.67	8.6	218.44	4.2	18.68	0.025	0.64	MW	Z	MH
0.188	4.775	5812	12.3	312.42	0.14	0.02	0.3	1.33	20	508	3	13.34	0.022	0.56	MW	Z	MH
0.203	5.156	M-51	0.5	12.7	2	0.35	0.2	0.89	0.81	20.574	1.8	8.01	0.019	0.48	MW	Z	MH
0.203	5.156	5262	0.53	13.462	0.31	0.05	0.02	0.09	1.5	38.1	0.49	2.18	0.012	0.3	MW	Z	FL
0.203	5.156	411	0.59	14.986	5.5	0.96	0.3	1.33	0.51	12.954	3.2	14.23	0.023	0.58	MW	Z	MH
0.203	5.156	ZZ1-57	0.94	23.876	0.55	0.1	0.09	0.4	2.2	55.88	1.3	5.78	0.017	0.43	MW	Z	FL
0.203	5.156	5829	0.94	23.876	2	0.35	0.3	1.33	0.95	24.13	2.2	9.79	0.023	0.58	SST	N	FL
0.203	5.156	O-4	0.94	23.876	2.2	0.39	0.3	1.33	1.3	33.02	3.2	14.23	0.023	0.58	MW	N	SH
0.203	5.156	M-50	1.19	30.226	0.2	0.04	0.06	0.27	4.1	104.14	0.87	3.87	0.015	0.38	MW	N	FL
0.203	5.156	ZZ1-4	1.22	30.988	4.7	0.82	0.8	3.56	1	25.4	5.5	24.46	0.028	0.71	MW	Z	MH
0.203	5.156	M-85	1.25	31.75	0.1	0.02	0.03	0.13	6	152.4	0.63	2.8	0.013	0.33	MW	Z	FL
0.203	5.156	5103	1.38	35.052	3.9	0.68	0.7	3.11	1.1	27.94	4.9	21.8	0.027	0.69	MW	Z	MH
0.203	5.156	M-45	1.5	38.1	4.2	0.74	0.9	4	1.2	30.48	6.1	27.13	0.029	0.74	MW	GI	MH
0.203	5.156	5510	1.69	42.926	1.8	0.32	0.5	2.22	1.8	45.72	3.9	17.35	0.025	0.64	MW	Z	FL
0.203	5.156	5242	2	50.8	2.3	0.4	0.7	3.11	1.9	48.26	4.9	21.8	0.027	0.69	MW	Z	SH
0.203	5.156	ZZ3-54	3	76.2	0.47												




O.D. Inches	Century Stock Number	Length Inches	Rate Lbs./In.	Initial Tension Lbs.	Sugg Max. Defl. Inches	Sugg Max. load Lbs.	Wire Dia. Inches	Mat'l	F	E							
									mm	nds							
0.219	5.563	M-57	0.78	19.812	7.2	1.26	0.7	3.11	0.62	15.748	5.1	22.68	0.028	0.71	MW	Z	MH
0.219	5.563	492	0.78	19.812	12	2.1	1	4.45	0.48	12.192	7	31.14	0.031	0.79	MW	Z	MH
0.219	5.563	M-135	0.81	20.574	5.2	0.91	0.6	2.67	0.76	19.304	4.5	20.02	0.027	0.69	MW	N	MH
0.219	5.563	M-30	0.88	22.352	3.1	0.54	0.3	1.33	0.95	24.13	3.3	14.68	0.024	0.61	MW	Z	MH
0.219	5.563	407	0.88	22.352	10	1.75	0.9	4	0.54	13.716	6.3	28.02	0.034	0.86	PB	N	MH
0.219	5.563	5583	0.94	23.876	0.18	0.03	0.04	0.18	3.8	96.52	0.73	3.25	0.014	0.36	MW	Z	FL
0.219	5.563	5436	1	25.4	0.47	0.08	0.09	0.4	2.3	58.42	1.2	5.34	0.017	0.43	MW	N	MH
0.219	5.563	5481	1	25.4	5.2	0.91	0.7	3.11	0.86	21.844	5.1	22.68	0.028	0.71	MW	Z	MH
0.219	5.563	5263	1	25.4	8.3	1.45	0.9	4	0.65	16.51	6.3	28.02	0.03	0.76	MW	Z	SH
0.219	5.563	5765	1.16	29.464	0.42	0.07	0.08	0.36	2.6	66.04	1.2	5.34	0.017	0.43	MW	N	FL
0.219	5.563	ZZ3-27	1.19	30.226	2.2	0.39	0.4	1.78	1.4	35.56	3.6	16.01	0.025	0.64	MW	Z	MH
0.219	5.563	558	1.25	31.75	1.1	0.19	0.2	0.89	2.2	55.88	2.6	11.56	0.022	0.56	MW	Z	MH
0.219	5.563	ZZ3-46	1.44	36.576	0.34	0.06	0.1	0.44	3.9	99.06	1.4	6.23	0.018	0.46	MW	N	MH
0.219	5.563	449	1.44	36.576	10	1.75	2	8.9	0.54	13.716	7.4	32.92	0.035	0.89	SPR	Z	FL
0.219	5.563	168-A	1.5	38.1	0.15	0.03	0.06	0.27	6.1	154.94	0.98	4.36	0.016	0.41	MW	Z	MH
0.219	5.563	253-A	1.5	38.1	0.28	0.05	0.1	0.44	4.7	119.38	1.4	6.23	0.018	0.46	MW	Z	MH
0.219	5.563	169-A	1.5	38.1	0.49	0.09	0.2	0.89	3.6	91.44	1.9	8.45	0.02	0.51	MW	Z	MH
0.219	5.563	170-A	1.5	38.1	1.1	0.19	0.3	1.33	2.4	60.96	2.9	12.9	0.023	0.58	MW	Z	MH
0.219	5.563	N-100	1.63	41.402	2.3	0.4	0.6	2.67	1.7	43.18	4.5	20.02	0.027	0.69	MW	Z	FL
0.219	5.563	5548	1.69	42.926	0.27	0.05	0.1	0.44	4.8	121.92	1.4	6.23	0.018	0.46	MW	Z	SH
0.219	5.563	168-B	1.88	47.752	0.11	0.02	0.06	0.27	8	203.2	0.98	4.36	0.016	0.41	MW	Z	FL
0.219	5.563	253-B	1.88	47.752	0.21	0.04	0.1	0.44	6.3	160.02	1.4	6.23	0.018	0.46	MW	Z	MH
0.219	5.563	169-B	1.88	47.752	0.37	0.06	0.2	0.89	4.7	119.38	1.9	8.45	0.02	0.51	MW	Z	MH
0.219	5.563	ZZ2-34	1.88	47.752	0.38	0.07	0.2	0.89	4.6	116.84	1.9	8.45	0.02	0.51	GI	MH	
0.219	5.563	170-B	1.88	47.752	0.79	0.14	0.3	1.33	3.4	86.36	2.9	12.9	0.023	0.58	MW	Z	MH
0.219	5.563	ZZ1-48	2	50.8	2.2	0.39	0.7	3.11	2	50.8	5.1	22.68	0.028	0.71	MW	Z	MH
0.219	5.563	428	2.06	52.324	0.42	0.07	0.2	0.89	4.8	121.92	2.2	9.79	0.021	0.53	MW	Z	MH
0.219	5.563	168-C	2.5	63.5	0.08	0.01	0.06	0.27	11	279.4	0.98	4.36	0.016	0.41	MW	Z	FL
0.219	5.563	5184	2.5	63.5	0.12	0.02	0.08	0.36	9.1	231.14	1.2	5.34	0.017	0.43	MW	Z	SL
0.219	5.563	253-C	2.5	63.5	0.15	0.03	0.1	0.44	8.6	218.44	1.4	6.23	0.018	0.46	MW	Z	FL
0.219	5.563	169-C	2.5	63.5	0.27	0.05	0.2	0.89	6.6	167.64	1.9	8.45	0.02	0.51	MW	Z	MH
0.219	5.563	170-C	2.5	63.5	0.56	0.1	0.3	1.33	4.7	119.38	2.9	12.9	0.023	0.58	MW	Z	FL
0.219	5.563	M-122	2.63	66.802	0.14	0.02	0.1	0.44	9.2	233.68	1.4	6.23	0.018	0.46	MW	N	FL
0.219	5.563	308	3.25	82.55	0.65	0.11	0.4	1.78	4.9	124.46	3.6	16.01	0.025	0.64	MW	Z	FL
0.219	5.563	5089	4.94	125.476	0.27	0.05	0.3	1.33	9.8	248.92	2.9	12.9	0.023	0.58	MW	Z	MH
0.219	5.563	5193	5.94	150.876	0.53	0.09	0.6	2.67	7.5	190.5	4.5	20.02	0.027	0.69	MW	Z	MH
0.234	5.944	ZZ1-31	0.59	14.986	3	0.53	0.2	0.89	0.63	16.002	2.1	9.34	0.021	0.53	MW	N	FL
0.234	5.944	5527	0.63	16.002	2.3	0.4	0.2	0.89	0.83	21.082	2.1	9.34	0.021	0.53	MW	N	MH
0.234	5.944	ZZ1-42	0.63	16.002	9.8	1.72	0.7	3.11	0.47	11.938	5.3	23.57	0.029	0.74	MW	N	MH
0.234	5.944	5299	0.66	16.764	15	2.63	0.8	3.56	0.33	8.382	5.9	26.24	0.03	0.76	MW	Z	FL
0.234	5.944	5628	0.66	16.764	16	2.8	0.9	4	0.35	8.89	6.5	28.91	0.031	0.79	MW	Z	FL
0.234	5.944	ZZ2-25	0.69	17.526	1.3	0.23	0.1	0.44	1.1	27.94	1.5	6.67	0.019	0.48	MW	N	MH
0.234	5.944	5414	0.75	19.05	1.8	0.32	0.2	0.89	1.2	30.48	2.4	10.68	0.022	0.56	MW	GI	FL
0.234	5.944	M-138	0.78	19.812	2	0.35	0.2	0.89	1.1	27.94	2.4	10.68	0.022	0.56	MW	N	FL
0.234	5.944	S-629	0.91	23.114	12	2.1	1	4.45	0.33	8.382	5	22.24	0.032	0.81	SST	N	MH
0.234	5.944	A-54	0.94	23.876	2.2	0.39	0.3	1.33	1.3	33.02	3.1	13.79	0.024	0.61	MW	GI	MH
0.234	5.944	5285	0.97	24.638	9.2	1.61	0.9	4	0.61	15.494	6.5	28.91	0.031	0.79	MW	N	MH
0.234	5.944	5181	1	25.4	1.4	0.25	0.2	0.89	1.5	38.1	2.4	10.68	0.022	0.56	MW	Z	FL
0.234	5.944	5404	1	25.4	8.4	1.47	0.9	4	0.67	17.018	6.5	28.91	0.031	0.79	MW	Z	FL
0.234	5.944	5389	1	25.4	27	4.73	2	8.9	0.25	6.35	8.8	39.14	0.038	0.97	SPR	Z	MH
0.234	5.944	5305	1.03	26.162	0.12	0.02	0.03	0.13	5.3	134.62	0.68	3.02	0.014	0.36	MW	N	SH
0.234	5.944	443	1.03	26.162	1.6	0.28	0.2	0.89	1.5	38.1	2.7	12.01	0.023	0.58	MW	Z	MH
0.234	5.944	458	1.03	26.162	2	0.35	0.3	1.33	1.4	35.56	3.1	13.79	0.024	0.61	MW	Z	FL
0.234	5.944	5385	1.06	26.924	2.5	0.44	0.4	1.78	1.2	30.48	3.3	14.68	0.025	0.64	MW	N	MH
0.234	5.944	M-149	1.06	26.924	8.6	1.51	1	4.45	0.71	18.034	7.2	32.03	0.032	0.81	MW	N	MH
0.234	5.944	439	1.09	27.686	0.67	0.12	0.1	0.44	2.5	63.5	1.8	8.01	0.02	0.51	MW	Z	MH
0.234	5.944	5244	1.13	28.702	12	2.1	1	4.45	0.43	10.922	6.8	30.25	0.035	0.89	SPR	BO	FL
0.234	5.944	S-652	1.28	32.512	26	4.55	3	13.34	0.3	7.62	11	48.93	0.041	1.04	SST	N	MH
0.234	5.944	5194	1.44	36.576	1.3	0.23	0.4	1.78	2.2	55.88	3.3	14.68	0.025	0.64	MW	Z	MH
0.234	5.944	ZZ1-12	1.69	42.926	0.41	0.07	0.2	0.89	3.1	78.74	1.4	6.23	0.021	0.53	SST	N	FL
0.234	5.944	B-25	1.78	45.212	6.2	1.09	1	4.45	0.84	21.336	6.8	30.25	0.035	0.89	SPR	N	MH
0.234	5.944	5640	2.13	54.102	30	5.25	6	26.69	0.43	10.922	19	84.51	0.048	1.22	SPR	Z	MH
0.234	5.944	5172	2.25	57.15	3.3	0.58	1	4.45	1.3	33.02	5.4	24.02	0.032	0.81	HD	Z	MH
0.234	5.944	5279	2.5	63.5	2.4	0.42	0.9	4	2.4	60.96	6.5	28.91	0.031	0.79	MW	Z	MH
0.234	5.944	B-22	2.53	64.262	1.8	0.32	0.8	3.56	2.8	71.12	5.9	26.24	0.03	0.76	MW	GI	MH
0.234	5.944	B-11	3.03	76.962	8.3	1.45	3	13.34	1	25.4	11	48.93	0.041	1.04	SPR	GI	MH
0.234	5.944	5185	4	101.6	0.44	0.08	0.4	1.78	6.7	170.18	3.3						

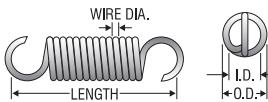


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length		Rate		Initial Tension		Sugg Max. Defl.		Sugg Max. load		Wire Dia.		Mat'l	F nsh s	E nds	
		Inches	mm	Lbs./In.	N/mm	Lbs.	N	Inches	mm	Lbs.	N	Inches	mm				
0.24	6.096	80299S	0.63	16.002	18	3.15	0.5	2.22	0.2	5.08	4.1	18.24	0.031	0.79	SST	N	FL
0.24	6.096	80317	0.63	16.002	32	5.6	0.8	3.56	0.22	5.588	7.9	35.14	0.034	0.86	MW	N	FL
0.24	6.096	80317S	0.63	16.002	27	4.73	0.6	2.67	0.17	4.318	5.4	24.02	0.034	0.86	SST	N	FL
0.24	6.096	80335	0.63	16.002	50	8.75	0.9	4	0.17	4.318	9.4	41.81	0.037	0.94	MW	N	FL
0.24	6.096	80335S	0.63	16.002	42	7.35	0.8	3.56	0.14	3.556	6.5	28.91	0.037	0.94	SST	N	FL
0.24	6.096	80354	0.63	16.002	79	13.83	2	8.9	0.15	3.81	13	57.82	0.041	1.04	MW	N	FL
0.24	6.096	80354S	0.63	16.002	67	11.73	1	4.45	0.11	2.794	9	40.03	0.041	1.04	SST	N	FL
0.24	6.096	80237	0.75	19.05	0.83	0.15	0.1	0.44	1.4	35.56	1.3	5.78	0.018	0.46	MW	N	FL
0.24	6.096	80237S	0.75	19.05	0.7	0.12	0.09	0.4	1.1	27.94	0.88	3.91	0.018	0.46	SST	N	FL
0.24	6.096	80250	0.75	19.05	22	0.39	0.2	0.89	0.97	24.638	2.3	10.23	0.022	0.56	MW	N	FL
0.24	6.096	80250S	0.75	19.05	1.9	0.33	0.2	0.89	0.75	19.05	1.6	7.12	0.022	0.56	SST	N	FL
0.24	6.096	80264	0.75	19.05	5.2	0.91	0.4	1.78	0.63	16.002	3.6	16.01	0.026	0.66	MW	N	FL
0.24	6.096	80264S	0.75	19.05	4.4	0.77	0.3	1.33	0.49	12.446	2.5	11.12	0.026	0.66	SST	N	FL
0.24	6.096	80282	0.75	19.05	8.9	1.56	0.5	2.22	0.51	12.954	5	22.24	0.029	0.74	MW	N	FL
0.24	6.096	80282S	0.75	19.05	7.5	1.31	0.4	1.78	0.4	10.16	3.4	15.12	0.029	0.74	SST	N	FL
0.24	6.096	80300	0.75	19.05	13	2.28	0.6	2.67	0.42	10.668	6.1	27.13	0.031	0.79	MW	N	FL
0.24	6.096	80300S	0.75	19.05	11	1.93	0.5	2.22	0.33	8.382	4.1	18.24	0.031	0.79	SST	N	FL
0.24	6.096	80318	0.75	19.05	20	3.5	0.8	3.56	0.36	9.144	7.9	35.14	0.034	0.86	MW	N	FL
0.24	6.096	80318S	0.75	19.05	17	2.98	0.6	2.67	0.28	7.112	5.4	24.02	0.034	0.86	SST	N	FL
0.24	6.096	80336	0.75	19.05	32	5.6	0.9	4	0.27	6.858	9.4	41.81	0.037	0.94	MW	N	FL
0.24	6.096	80336S	0.75	19.05	27	4.73	0.8	3.56	0.21	5.334	6.5	28.91	0.037	0.94	SST	N	FL
0.24	6.096	80355	0.75	19.05	55	9.63	1	4.45	0.21	5.334	13	57.82	0.041	1.04	MW	N	FL
0.24	6.096	80355S	0.75	19.05	47	8.23	0.9	4	0.16	4.064	8.6	38.25	0.041	1.04	SST	N	FL
0.24	6.096	80238	0.88	22.352	0.57	0.1	0.1	0.44	2.1	53.34	1.3	5.78	0.018	0.46	MW	N	FL
0.24	6.096	80238S	0.88	22.352	0.48	0.08	0.09	0.4	1.6	40.64	0.88	3.91	0.018	0.46	SST	N	FL
0.24	6.096	80251	0.88	22.352	1.6	0.28	0.2	0.89	1.3	33.02	2.3	10.23	0.022	0.56	MW	N	FL
0.24	6.096	80251S	0.88	22.352	1.4	0.25	0.2	0.89	1	25.4	1.6	7.12	0.022	0.56	SST	N	FL
0.24	6.096	80265	0.88	22.352	3.8	0.67	0.4	1.78	0.87	22.098	3.6	16.01	0.026	0.66	MW	N	FL
0.24	6.096	80265S	0.88	22.352	3.2	0.56	0.3	1.33	0.68	17.272	2.5	11.12	0.026	0.66	SST	N	FL
0.24	6.096	80283	0.88	22.352	6.5	1.14	0.5	2.22	0.69	17.526	5	22.24	0.029	0.74	MW	N	FL
0.24	6.096	80283S	0.88	22.352	5.5	0.96	0.4	1.78	0.54	13.716	3.4	15.12	0.029	0.74	SST	N	FL
0.24	6.096	80301	0.88	22.352	9.4	1.65	0.6	2.67	0.59	14.986	6.1	27.13	0.031	0.79	MW	N	FL
0.24	6.096	80301S	0.88	22.352	7.9	1.38	0.5	2.22	0.46	11.684	4.1	18.24	0.031	0.79	SST	N	FL
0.24	6.096	80319	0.88	22.352	15	2.63	0.8	3.56	0.49	12.446	7.9	35.14	0.034	0.86	MW	N	FL
0.24	6.096	80319S	0.88	22.352	13	2.28	0.6	2.67	0.38	9.652	5.4	24.02	0.034	0.86	SST	N	FL
0.24	6.096	80337	0.88	22.352	24	4.2	1	4.45	0.36	9.144	9.6	42.7	0.037	0.94	MW	N	FL
0.24	6.096	80337S	0.88	22.352	20	3.5	0.9	4	0.29	7.366	6.6	29.36	0.037	0.94	SST	N	FL
0.24	6.096	80356	0.88	22.352	55	9.63	1	4.45	0.21	5.334	13	57.82	0.041	1.04	MW	N	FL
0.24	6.096	80356S	0.88	22.352	46	8.05	0.9	4	0.17	4.318	8.5	37.81	0.041	1.04	SST	N	FL
0.24	6.096	80239	1	25.4	0.46	0.08	0.1	0.44	2.6	66.04	1.3	5.78	0.018	0.46	MW	N	FL
0.24	6.096	80239S	1	25.4	0.39	0.07	0.09	0.4	2	50.8	0.88	3.91	0.018	0.46	SST	N	FL
0.24	6.096	80252	1	25.4	1.2	0.21	0.2	0.89	1.7	43.18	2.3	10.23	0.022	0.56	MW	N	FL
0.24	6.096	80252S	1	25.4	1	0.18	0.2	0.89	1.3	33.02	1.6	7.12	0.022	0.56	SST	N	FL
0.24	6.096	80266	1	25.4	2.9	0.51	0.4	1.78	1.1	27.94	3.6	16.01	0.026	0.66	MW	N	FL
0.24	6.096	80266S	1	25.4	2.5	0.44	0.3	1.33	0.88	22.352	2.5	11.12	0.026	0.66	SST	N	FL
0.24	6.096	80284	1	25.4	5.1	0.89	0.5	2.22	0.88	22.352	5	22.24	0.029	0.74	MW	N	FL
0.24	6.096	80284S	1	25.4	4.3	0.75	0.4	1.78	0.69	17.526	3.4	15.12	0.029	0.74	SST	N	FL
0.24	6.096	80302	1	25.4	7.2	1.26	0.6	2.67	0.76	19.304	6.1	27.13	0.031	0.79	MW	N	FL
0.24	6.096	80302S	1	25.4	6.1	1.07	0.5	2.22	0.59	14.966	4.1	18.24	0.031	0.79	SST	N	FL
0.24	6.096	80320	1	25.4	12	2.1	0.8	3.56	0.61	15.494	7.9	35.14	0.034	0.86	MW	N	FL
0.24	6.096	80320S	1	25.4	10	1.75	0.6	2.67	0.48	12.192	5.4	24.02	0.034	0.86	SST	N	FL
0.24	6.096	80338	1	25.4	19	3.33	0.9	4	0.46	11.684	9.4	41.81	0.037	0.94	MW	N	FL
0.24	6.096	80338S	1	25.4	16	2.8	0.8	3.56	0.36	9.144	6.5	28.91	0.037	0.94	SST	N	FL
0.24	6.096	80357	1	25.4	32	5.6	1	4.45	0.36	9.144	13	57.82	0.041	1.04	MW	N	FL
0.24	6.096	80357S	1	25.4	27	4.73	0.9	4	0.28	7.112	8.6	38.25	0.041	1.04	SST	N	FL
0.24	6.096	80240	1.13	28.702	0.33	0.06	0.1	0.44	3.6	91.44	1.3	5.78	0.018	0.46	MW	N	FL
0.24	6.096	80240S	1.13	28.702	0.28	0.05	0.09	0.4	2.8	71.12	0.87	3.87	0.018	0.46	SST	N	FL
0.24	6.096	80253	1.13	28.702	1	0.18	0.2	0.89	2.1	53.34	2.3	10.23	0.022	0.56	MW	N	FL
0.24	6.096	80253S	1.13	28.702	0.87	0.15	0.2	0.89	1.6	40.64	1.6	7.12	0.022	0.56	SST	N	FL
0.24	6.096	80267	1.13	28.702	2.4	0.42	0.4	1.78	1.4	35.56	3.6	16.01	0.026	0.66	MW	N	FL
0.24	6.096	80267S	1.13	28.702	2	0.35	0.3	1.33	1.1	27.94	2.5	11.12	0.026	0.66	SST	N	FL
0.24	6.096	80285	1.13	28.702	4.2	0.74	0.5	2.22	1.1	27.94	5	22.24	0.029	0.74	MW	N	FL
0.24	6.096	80285S	1.13	28.702	3.6	0.63	0.4	1.78	0.84	21.336	3.4	15.12	0.029	0.74	SST	N	FL
0.24	6.096	80303	1.13	28.702	6.1	1.07	0.6	2.67	0.9	22.86	6.1	27.13	0.031	0.79	MW	N	FL
0.24	6.096	80303S	1.13	28.702	5.2	0.91	0.5	2.22	0.7	17.78	4.1	18.24	0.031	0.79	SST	N	FL
0.24	6.096	80321	1.13	28.702	9.9	1.73	0.8	3.56	0.73	18.542	7.9	35.14	0.034	0.86	MW	N	




O.D. Inches	Century Stock Number	Length Inches	Rate Lbs./In.	Initial Tension Lbs.	Sugg Max. Defl. Inches	Sugg Max. load Lbs.	Wire Dia. Inches	Mat'l	F	E							
									mm	nds							
0.24	6.096	80304S	1.25	31.75	4.3	0.75	0.5	2.22	0.84	21.336	4.1	18.24	0.031	0.79	SST	N	FL
0.24	6.096	80322	1.25	31.75	8.4	1.47	0.8	3.56	0.85	21.59	7.9	35.14	0.034	0.86	MW	N	FL
0.24	6.096	80322S	1.25	31.75	7.1	1.24	0.6	2.67	0.66	16.764	5.4	24.02	0.034	0.86	SST	N	FL
0.24	6.096	80340	1.25	31.75	13	2.28	0.9	4	0.64	16.256	9.4	41.81	0.037	0.94	MW	N	FL
0.24	6.096	80340S	1.25	31.75	11	1.93	0.8	3.56	0.5	12.7	6.5	28.91	0.037	0.94	SST	N	FL
0.24	6.096	80359	1.25	31.75	23	4.03	1	4.45	0.5	12.7	13	57.82	0.041	1.04	MW	N	FL
0.24	6.096	80359S	1.25	31.75	20	3.5	0.9	4	0.39	9.906	8.6	38.25	0.041	1.04	SST	N	FL
0.24	6.096	80242	1.38	35.052	0.24	0.04	0.1	0.44	5	127	1.3	5.78	0.018	0.46	MW	N	FL
0.24	6.096	80242S	1.38	35.052	0.2	0.04	0.09	0.4	3.9	99.06	0.87	3.87	0.018	0.46	SST	N	FL
0.24	6.096	80255	1.38	35.052	0.75	0.13	0.2	0.89	2.8	71.12	2.3	10.23	0.022	0.56	MW	N	FL
0.24	6.096	80255S	1.38	35.052	0.64	0.11	0.2	0.89	2.2	55.88	1.6	7.12	0.022	0.56	SST	N	FL
0.24	6.096	80269	1.38	35.052	1.8	0.32	0.4	1.78	1.9	48.26	3.6	16.01	0.026	0.66	MW	N	FL
0.24	6.096	80269S	1.38	35.052	1.5	0.26	0.3	1.33	1.5	38.1	2.5	11.12	0.026	0.66	SST	N	FL
0.24	6.096	80287	1.38	35.052	3.1	0.54	0.5	2.22	1.5	38.1	5	22.24	0.029	0.74	MW	N	FL
0.24	6.096	80287S	1.38	35.052	2.6	0.46	0.4	1.78	1.1	27.94	3.4	15.12	0.029	0.74	SST	N	FL
0.24	6.096	80305	1.38	35.052	4.6	0.81	0.6	2.67	1.2	30.48	6.1	27.13	0.031	0.79	MW	N	FL
0.24	6.096	80305S	1.38	35.052	3.9	0.68	0.5	2.22	0.94	23.876	4.1	18.24	0.031	0.79	SST	N	FL
0.24	6.096	80323	1.38	35.052	7.3	1.28	0.8	3.56	0.99	25.146	7.9	35.14	0.034	0.86	MW	N	FL
0.24	6.096	80323S	1.38	35.052	6.2	1.09	0.6	2.67	0.77	19.558	5.4	24.02	0.034	0.86	SST	N	FL
0.24	6.096	80341	1.38	35.052	12	2.1	0.9	4	0.73	18.542	9.4	41.81	0.037	0.94	MW	N	FL
0.24	6.096	80341S	1.38	35.052	9.9	1.73	0.8	3.56	0.57	14.478	6.5	28.91	0.037	0.94	SST	N	FL
0.24	6.096	80360	1.38	35.052	20	3.5	1	4.45	0.57	14.478	13	57.82	0.041	1.04	MW	N	FL
0.24	6.096	80360S	1.38	35.052	17	2.98	0.9	4	0.45	11.43	8.6	38.25	0.041	1.04	SST	N	FL
0.24	6.096	80243	1.5	38.1	0.21	0.04	0.1	0.44	5.7	144.78	1.3	5.78	0.018	0.46	MW	N	FL
0.24	6.096	80243S	1.5	38.1	0.18	0.03	0.09	0.4	4.4	111.76	0.88	3.91	0.018	0.46	SST	N	FL
0.24	6.096	80256	1.5	38.1	0.65	0.11	0.2	0.89	3.3	83.82	2.3	10.23	0.022	0.56	MW	N	FL
0.24	6.096	80256S	1.5	38.1	0.55	0.1	0.2	0.89	2.5	63.5	1.6	7.12	0.022	0.56	SST	N	FL
0.24	6.096	80270	1.5	38.1	1.6	0.28	0.4	1.78	2.1	53.34	3.6	16.01	0.026	0.66	MW	N	FL
0.24	6.096	80270S	1.5	38.1	1.3	0.23	0.3	1.33	1.6	40.64	2.5	11.12	0.026	0.66	SST	N	FL
0.24	6.096	80288	1.5	38.1	2.7	0.47	0.5	2.22	1.7	43.18	5	22.24	0.029	0.74	MW	N	FL
0.24	6.096	80288S	1.5	38.1	2.3	0.4	0.4	1.78	1.3	33.02	3.4	15.12	0.029	0.74	SST	N	FL
0.24	6.096	80306	1.5	38.1	4	0.7	0.6	2.67	1.4	35.56	6.1	27.13	0.031	0.79	MW	N	FL
0.24	6.096	80306S	1.5	38.1	3.4	0.6	0.5	2.22	1.1	27.94	4.1	18.24	0.031	0.79	SST	N	FL
0.24	6.096	80324	1.5	38.1	6.5	1.14	0.8	3.56	1.1	27.94	7.9	35.14	0.034	0.86	MW	N	FL
0.24	6.096	80324S	1.5	38.1	5.5	0.96	0.6	2.67	0.86	21.844	5.4	24.02	0.034	0.86	SST	N	FL
0.24	6.096	80342	1.5	38.1	10	1.75	0.9	4	0.82	20.828	9.4	41.81	0.037	0.94	MW	N	FL
0.24	6.096	80342S	1.5	38.1	8.9	1.56	0.8	3.56	0.64	16.256	6.5	28.91	0.037	0.94	SST	N	FL
0.24	6.096	80361	1.5	38.1	18	3.15	1	4.45	0.64	16.256	13	57.82	0.041	1.04	MW	N	FL
0.24	6.096	80361S	1.5	38.1	15	2.63	0.9	4	0.5	12.7	8.6	38.25	0.041	1.04	SST	N	FL
0.24	6.096	80244	1.75	44.45	0.17	0.03	0.1	0.44	7	177.8	1.3	5.78	0.018	0.46	MW	N	FL
0.24	6.096	80244S	1.75	44.45	0.14	0.02	0.09	0.4	5.4	137.16	0.87	3.87	0.018	0.46	SST	N	FL
0.24	6.096	80257	1.75	44.45	0.55	0.1	0.2	0.89	3.9	99.06	2.3	10.23	0.022	0.56	MW	N	FL
0.24	6.096	80257S	1.75	44.45	0.47	0.08	0.2	0.89	3	76.2	1.6	7.12	0.022	0.56	SST	N	FL
0.24	6.096	80271	1.75	44.45	1.3	0.23	0.4	1.78	2.6	66.04	3.6	16.01	0.026	0.66	MW	N	FL
0.24	6.096	80271S	1.75	44.45	1.1	0.19	0.3	1.33	2	50.8	2.5	11.12	0.026	0.66	SST	N	FL
0.24	6.096	80289	1.75	44.45	2.3	0.4	0.5	2.22	2	50.8	5	22.24	0.029	0.74	MW	N	FL
0.24	6.096	80289S	1.75	44.45	1.9	0.33	0.4	1.78	1.6	40.64	3.4	15.12	0.029	0.74	SST	N	FL
0.24	6.096	80307	1.75	44.45	3.2	0.56	0.6	2.67	1.7	43.18	6.1	27.13	0.031	0.79	MW	N	FL
0.24	6.096	80307S	1.75	44.45	2.7	0.47	0.5	2.22	1.3	33.02	4.1	18.24	0.031	0.79	SST	N	FL
0.24	6.096	80325	1.75	44.45	5.3	0.93	0.8	3.56	1.4	35.56	7.9	35.14	0.034	0.86	MW	N	FL
0.24	6.096	80325S	1.75	44.45	4.5	0.79	0.6	2.67	1.1	27.94	5.4	24.02	0.034	0.86	SST	N	FL
0.24	6.096	80343	1.75	44.45	8.5	1.49	0.9	4	1	25.4	9.4	41.81	0.037	0.94	MW	N	FL
0.24	6.096	80343S	1.75	44.45	7.2	1.26	0.8	3.56	0.79	20.066	6.5	28.91	0.037	0.94	SST	N	FL
0.24	6.096	80362	1.75	44.45	15	2.63	1	4.45	0.78	19.812	13	57.82	0.041	1.04	MW	N	FL
0.24	6.096	80362S	1.75	44.45	12	2.1	0.9	4	0.62	15.748	8.6	38.25	0.041	1.04	SST	N	FL
0.24	6.096	80245	2	50.8	0.18	0.03	0.1	0.44	6.8	172.72	1.3	5.78	0.018	0.46	MW	N	FL
0.24	6.096	80245S	2	50.8	0.15	0.03	0.09	0.4	5.3	134.62	0.88	3.91	0.018	0.46	SST	N	FL
0.24	6.096	80258	2	50.8	0.45	0.08	0.2	0.89	4.7	119.38	2.3	10.23	0.022	0.56	MW	N	FL
0.24	6.096	80258S	2	50.8	0.38	0.07	0.2	0.89	3.7	93.98	1.6	7.12	0.022	0.56	SST	N	FL
0.24	6.096	80272	2	50.8	1.1	0.19	0.4	1.78	3.1	78.74	3.6	16.01	0.026	0.66	MW	N	FL
0.24	6.096	80272S	2	50.8	0.89	0.16	0.3	1.33	2.4	60.96	2.5	11.12	0.026	0.66	SST	N	FL
0.24	6.096	80290	2	50.8	1.9	0.33	0.5	2.22	2.4	60.96	5	22.24	0.029	0.74	MW	N	FL
0.24	6.096	80290S	2	50.8	1.6	0.28	0.4	1.78	1.8	45.72	3.4	15.12	0.029	0.74	SST	N	FL
0.24	6.096	80308	2	50.8	2.8	0.49	0.6	2.67	2	50.8	6.1	27.13	0.031	0.79	MW	N	FL
0.24	6.096	80308S	2	50.8	2.3	0.4	0.5	2.22	1.6	40.64	4.1	18.24	0.031	0.79	SST	N	FL
0.24	6.096	80326	2	50.8	4.5	0.79	0.8	3.56	1.6	40.64	7.9	35.14	0.034	0.86	MW	N	FL
0.24	6.096	80326S	2	50.8	3.8	0.67	0.6	2.67	1.3	33.02	5.4	24.02	0.034	0.86			

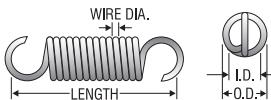


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm		Rate Lbs./In. N/mm		Initial Tension Lbs. N		Sugg Max. Defl. Inches mm		Sugg Max. load Lbs. N		Wire Dia. Inches mm		Mat'l	F nsh s	E nds	
		Inches	mm	Lbs./In.	N/mm	Lbs.	N	Inches	mm	Lbs.	N	Inches	mm				
0.24	6.096	80309S	2.25	57.15	2	0.35	0.5	2.22	1.8	45.72	4.1	18.24	0.031	0.79	SST	N	FL
0.24	6.096	80327	2.25	57.15	3.9	0.68	0.8	3.56	1.9	48.26	7.9	35.14	0.034	0.86	MW	N	FL
0.24	6.096	80327S	2.25	57.15	3.3	0.58	0.6	2.67	1.5	38.1	5.4	24.02	0.034	0.86	SST	N	FL
0.24	6.096	80345	2.25	57.15	6.2	1.09	1.9	8.45	1.4	35.56	9.4	41.81	0.037	0.94	MW	N	FL
0.24	6.096	80345S	2.25	57.15	5.2	0.91	1.8	8.01	1.1	27.94	6.5	28.91	0.037	0.94	SST	N	FL
0.24	6.096	80364	2.25	57.15	11	1.93	1	4.45	1.1	27.94	13	57.82	0.041	1.04	MW	N	FL
0.24	6.096	80364S	2.25	57.15	9.1	1.59	0.9	4	0.84	21.336	8.6	38.25	0.041	1.04	SST	N	FL
0.24	6.096	80247	2.5	63.5	0.11	0.02	0.1	0.44	11	279.4	1.3	5.78	0.018	0.46	MW	N	FL
0.24	6.096	80247S	2.5	63.5	0.09	0.02	0.09	0.4	8.8	223.52	0.88	3.91	0.018	0.46	SST	N	FL
0.24	6.096	80260	2.5	63.5	0.31	0.05	0.2	0.89	6.9	175.26	2.3	10.23	0.022	0.56	MW	N	FL
0.24	6.096	80260S	2.5	63.5	0.26	0.05	0.2	0.89	5.3	134.62	1.6	7.12	0.022	0.56	SST	N	FL
0.24	6.096	80274	2.5	63.5	0.78	0.14	0.4	1.78	4.2	106.68	3.6	16.01	0.026	0.66	MW	N	FL
0.24	6.096	80274S	2.5	63.5	0.66	0.12	0.3	1.33	3.3	83.82	2.5	11.12	0.026	0.66	SST	N	FL
0.24	6.096	80292	2.5	63.5	1.4	0.25	0.5	2.22	3.1	78.74	5	22.24	0.029	0.74	MW	N	FL
0.24	6.096	80292S	2.5	63.5	1.2	0.21	0.4	1.78	2.4	60.96	3.4	15.12	0.029	0.74	SST	N	FL
0.24	6.096	80310	2.5	63.5	2.1	0.37	0.6	2.67	2.6	66.04	6.1	27.13	0.031	0.79	MW	N	FL
0.24	6.096	80310S	2.5	63.5	1.8	0.32	0.5	2.22	2	50.8	4.1	18.24	0.031	0.79	SST	N	FL
0.24	6.096	80328	2.5	63.5	3.4	0.6	0.8	3.56	2.1	53.34	7.9	35.14	0.034	0.86	MW	N	FL
0.24	6.096	80328S	2.5	63.5	2.9	0.51	0.6	2.67	1.6	40.64	5.4	24.02	0.034	0.86	SST	N	FL
0.24	6.096	80346	2.5	63.5	5.5	0.96	0.9	4	1.6	40.64	9.4	41.81	0.037	0.94	MW	N	FL
0.24	6.096	80346S	2.5	63.5	4.6	0.81	0.8	3.56	1.2	30.48	6.5	28.91	0.037	0.94	SST	N	FL
0.24	6.096	80365	2.5	63.5	9.5	1.66	1	4.45	1.2	30.48	13	57.82	0.041	1.04	MW	N	FL
0.24	6.096	80365S	2.5	63.5	8	1.4	0.9	4	0.95	24.13	8.6	38.25	0.041	1.04	SST	N	FL
0.24	6.096	80248	2.75	69.85	0.1	0.02	0.1	0.44	12	304.8	1.3	5.78	0.018	0.46	MW	N	FL
0.24	6.096	80248S	2.75	69.85	0.09	0.02	0.09	0.4	9.2	233.68	0.88	3.91	0.018	0.46	SST	N	FL
0.24	6.096	80261	2.75	69.85	0.29	0.05	0.2	0.89	7.3	185.42	2.3	10.23	0.022	0.56	MW	N	FL
0.24	6.096	80261S	2.75	69.85	0.25	0.04	0.2	0.89	5.7	144.78	1.6	7.12	0.022	0.56	SST	N	FL
0.24	6.096	80275	2.75	69.85	0.74	0.13	0.4	1.78	4.4	111.76	3.6	16.01	0.026	0.66	MW	N	FL
0.24	6.096	80275S	2.75	69.85	0.63	0.11	0.3	1.33	3.4	86.36	2.5	11.12	0.026	0.66	SST	N	FL
0.24	6.096	80293	2.75	69.85	1.3	0.23	0.5	2.22	3.4	86.36	5	22.24	0.029	0.74	MW	N	FL
0.24	6.096	80293S	2.75	69.85	1.1	0.19	0.4	1.78	2.7	68.58	3.4	15.12	0.029	0.74	SST	N	FL
0.24	6.096	80311	2.75	69.85	1.8	0.32	0.6	2.67	3	76.2	6.1	27.13	0.031	0.79	MW	N	FL
0.24	6.096	80311S	2.75	69.85	1.6	0.28	0.5	2.22	2.3	58.42	4.1	18.24	0.031	0.79	SST	N	FL
0.24	6.096	80329	2.75	69.85	3	0.53	0.8	3.56	2.4	60.96	7.9	35.14	0.034	0.86	MW	N	FL
0.24	6.096	80329S	2.75	69.85	2.6	0.46	0.6	2.67	1.8	45.72	5.4	24.02	0.034	0.86	SST	N	FL
0.24	6.096	80347	2.75	69.85	4.9	0.86	0.9	4	1.7	43.18	9.4	41.81	0.037	0.94	MW	N	FL
0.24	6.096	80347S	2.75	69.85	4.2	0.74	0.8	3.56	1.4	35.56	6.5	28.91	0.037	0.94	SST	N	FL
0.24	6.096	80366	2.75	69.85	8.5	1.49	1	4.45	1.4	35.56	13	57.82	0.041	1.04	MW	N	FL
0.24	6.096	80366S	2.75	69.85	7.2	1.26	0.9	4	1.1	27.94	8.6	38.25	0.041	1.04	SST	N	FL
0.24	6.096	80276	3	76.2	0.65	0.11	0.4	1.78	5	127	3.6	16.01	0.026	0.66	MW	N	FL
0.24	6.096	80276S	3	76.2	0.55	0.1	0.3	1.33	3.9	99.06	2.5	11.12	0.026	0.66	SST	N	FL
0.24	6.096	80294	3	76.2	1.2	0.21	0.5	2.22	3.9	99.06	5	22.24	0.029	0.74	MW	N	FL
0.24	6.096	80294S	3	76.2	0.98	0.17	0.4	1.78	3.1	78.74	3.4	15.12	0.029	0.74	SST	N	FL
0.24	6.096	80312	3	76.2	1.6	0.28	0.6	2.67	3.3	83.82	6.1	27.13	0.031	0.79	MW	N	FL
0.24	6.096	80312S	3	76.2	1.4	0.25	0.5	2.22	2.6	66.04	4.1	18.24	0.031	0.79	SST	N	FL
0.24	6.096	80330	3	76.2	2.8	0.49	0.8	3.56	2.6	66.04	7.9	35.14	0.034	0.86	MW	N	FL
0.24	6.096	80330S	3	76.2	2.3	0.4	0.6	2.67	2	50.8	5.4	24.02	0.034	0.86	SST	N	FL
0.24	6.096	80348	3	76.2	4.4	0.77	0.9	4	1.9	48.26	9.4	41.81	0.037	0.94	MW	N	FL
0.24	6.096	80348S	3	76.2	3.7	0.65	0.8	3.56	1.5	38.1	6.5	28.91	0.037	0.94	SST	N	FL
0.24	6.096	80367	3	76.2	7.7	1.35	1	4.45	1.5	38.1	13	57.82	0.041	1.04	MW	N	FL
0.24	6.096	80367S	3	76.2	6.5	1.14	0.9	4	1.2	30.48	8.6	38.25	0.041	1.04	SST	N	FL
0.24	6.096	80349	3.25	82.55	4	0.7	0.9	4	2.1	53.34	9.4	41.81	0.037	0.94	MW	N	FL
0.24	6.096	80349S	3.25	82.55	3.4	0.6	0.8	3.56	1.7	43.18	6.5	28.91	0.037	0.94	SST	N	FL
0.24	6.096	80277	3.5	88.9	0.6	0.11	0.3	1.33	5.4	137.16	3.6	16.01	0.026	0.66	MW	N	FL
0.24	6.096	80277S	3.5	88.9	0.51	0.09	0.3	1.33	4.2	106.68	2.4	10.68	0.026	0.66	SST	N	FL
0.24	6.096	80295	3.5	88.9	1	0.18	0.4	1.78	4.5	114.3	4.9	21.18	0.029	0.74	MW	N	FL
0.24	6.096	80295S	3.5	88.9	0.85	0.15	0.3	1.33	3.5	88.9	3.3	14.68	0.029	0.74	SST	N	FL
0.24	6.096	80313	3.5	88.9	1.5	0.26	0.5	2.22	3.6	91.44	6	26.69	0.031	0.79	MW	N	FL
0.24	6.096	80313S	3.5	88.9	1.3	0.23	0.4	1.78	2.8	71.12	4.1	18.24	0.031	0.79	SST	N	FL
0.24	6.096	80331	3.5	88.9	2.4	0.42	0.7	3.11	3	76.2	7.8	34.69	0.034	0.86	MW	N	FL
0.24	6.096	80331S	3.5	88.9	2	0.35	0.6	2.67	2.3	58.42	5.3	23.57	0.034	0.86	SST	N	FL
0.24	6.096	80350	3.5	88.9	3.6	0.63	0.9	4	2.4	60.96	9.4	41.81	0.037	0.94	MW	N	FL
0.24	6.096	80350S	3.5	88.9	3.1	0.54	0.8	3.56	1.9	48.26	6.5	28.91	0.037	0.94	SST	N	FL
0.24	6.096	80368	3.5	88.9	6.5	1.14	1	4.45	1.8	45.72	13	57.82	0.041	1.04	MW	N	FL
0.24	6.096	80368S	3.5	88.9	5.5	0.96	0.9	4	1.4	35.56	8.6	38.25	0.041	1.04	SST	N	FL
0.24	6.096	80278	4	101.6	0.5	0.09	0.3	1.33	6.5	165.1	3.6	16.01	0.026	0.66	MW	N	FL
0.24	6.096	80278S															




O.D. Inches	Century Stock Number	Length Inches	Rate Lbs./In.	Initial Tension Lbs.	Sugg Max. Defl. Inches	Sugg Max. load Lbs.	Wire Dia. Inches	Mat'l	F	E							
									mm	nds							
0.24	6.096	80297S	4.5	114.3	0.68	0.12	0.3	1.33	4.4	111.76	3.3	14.68	0.029	0.74	SST	N	FL
0.24	6.096	80315	4.5	114.3	1.1	0.19	0.5	2.22	5	127	6	26.69	0.031	0.79	MW	N	FL
0.24	6.096	80315S	4.5	114.3	0.94	0.16	0.4	1.78	3.9	99.06	4.1	18.24	0.031	0.79	SST	N	FL
0.24	6.096	80333	4.5	114.3	1.8	0.32	0.7	3.11	4	101.6	7.8	34.69	0.034	0.86	MW	N	FL
0.24	6.096	80333S	4.5	114.3	1.5	0.26	0.6	2.67	3.1	78.74	5.3	23.57	0.034	0.86	SST	N	FL
0.24	6.096	80352	4.5	114.3	2.9	0.51	0.8	3.56	2.9	73.66	9.3	41.37	0.037	0.94	MW	N	FL
0.24	6.096	80352S	4.5	114.3	2.5	0.44	0.7	3.11	2.3	58.42	6.4	28.47	0.037	0.94	SST	N	FL
0.24	6.096	80370	4.5	114.3	5.1	0.89	1	4.45	2.3	58.42	13	57.82	0.041	1.04	MW	N	FL
0.24	6.096	80370S	4.5	114.3	4.3	0.75	0.9	4	1.8	45.72	8.6	38.25	0.041	1.04	SST	N	FL
0.24	6.096	80280	5	127	0.4	0.07	0.3	1.33	8.2	208.28	3.6	16.01	0.026	0.66	MW	N	FL
0.24	6.096	80280S	5	127	0.34	0.06	0.3	1.33	6.4	162.56	2.4	10.68	0.026	0.66	SST	N	FL
0.24	6.096	80298	5	127	0.7	0.12	0.4	1.78	6.4	162.56	4.9	21.8	0.029	0.74	MW	N	FL
0.24	6.096	80298S	5	127	0.6	0.11	0.3	1.33	5	127	3.3	14.68	0.029	0.74	SST	N	FL
0.24	6.096	80316	5	127	1	0.18	0.5	2.22	5.5	139.7	6	26.69	0.031	0.79	MW	N	FL
0.24	6.096	80316S	5	127	0.85	0.15	0.4	1.78	4.3	109.22	4.1	18.24	0.031	0.79	SST	N	FL
0.24	6.096	80334	5	127	1.6	0.28	0.7	3.11	4.5	114.3	7.8	34.69	0.034	0.86	MW	N	FL
0.24	6.096	80334S	5	127	1.4	0.25	0.6	2.67	3.5	88.9	5.3	23.57	0.034	0.86	SST	N	FL
0.24	6.096	80353	5	127	2.6	0.46	0.8	3.56	3.3	83.82	9.3	41.37	0.037	0.94	MW	N	FL
0.24	6.096	80353S	5	127	2.2	0.39	0.7	3.11	2.6	66.04	6.4	28.47	0.037	0.94	SST	N	FL
0.24	6.096	80371	5	127	4.6	0.81	1	4.45	2.5	63.5	13	57.82	0.041	1.04	MW	N	FL
0.24	6.096	80371S	5	127	3.9	0.68	0.9	4	2	50.8	8.6	38.25	0.041	1.04	SST	N	FL
0.25	6.35	A11-4	0.66	16.764	0.39	0.07	0.04	0.18	1.7	43.18	0.71	3.16	0.015	0.38	MW	N	MH
0.25	6.35	5411	0.69	17.526	3.3	0.58	0.3	1.33	0.63	16.002	2.3	10.23	0.022	0.56	MW	N	FL
0.25	6.35	5390	0.69	17.526	3.3	0.58	0.3	1.33	0.8	20.32	2.9	12.9	0.024	0.61	MW	Z	MH
0.25	6.35	M-19	0.69	17.526	3	0.53	0.3	1.33	0.63	16.002	2.1	9.34	0.025	0.64	SST	N	FL
0.25	6.35	468	0.69	17.526	6.5	1.14	0.6	2.67	0.67	17.018	4.9	21.8	0.029	0.74	MW	Z	MH
0.25	6.35	5419	0.69	17.526	16	2.8	0.8	3.56	0.33	8.382	6	26.69	0.031	0.79	MW	N	MH
0.25	6.35	S-611	0.69	17.526	12	2.1	0.8	3.56	0.33	8.382	4.7	20.91	0.032	0.81	SST	N	MH
0.25	6.35	O-11	0.69	17.526	24	4.2	1	4.45	0.21	5.334	6	26.69	0.034	0.86	SPR	Z	MH
0.25	6.35	ZZ1-1	0.72	18.288	1.1	0.19	0.1	0.44	1.5	38.1	1.7	7.56	0.02	0.51	MW	Z	FL
0.25	6.35	5394	0.72	18.288	1.6	0.28	0.1	0.44	1.1	27.94	2	8.9	0.021	0.53	MW	N	MH
0.25	6.35	546	0.73	18.542	1.5	0.26	0.1	0.44	1	25.4	1.7	7.56	0.02	0.51	MW	Z	FL
0.25	6.35	B7-60	0.75	19.05	3.9	0.68	2	8.9	0.54	13.716	3.6	16.01	0.026	0.66	SST	N	MH
0.25	6.35	ZZ4-32	0.75	19.05	11	1.93	0.8	3.56	0.48	12.192	6	26.69	0.031	0.79	MW	N	FL
0.25	6.35	5235	0.78	19.812	8.9	1.56	0.7	3.11	0.54	13.716	5.4	24.02	0.03	0.76	MW	Z	MH
0.25	6.35	455	0.8	20.32	6.8	1.19	0.7	3.11	0.7	17.78	5.4	24.02	0.03	0.76	MW	Z	MH
0.25	6.35	5359	0.81	20.574	1.1	0.19	0.1	0.44	1.4	35.56	1.7	7.56	0.02	0.51	MW	Z	MH
0.25	6.35	5286	0.84	21.336	7.4	1.3	0.6	2.67	0.59	14.986	4.9	21.8	0.029	0.74	MW	Z	MH
0.25	6.35	421	0.88	22.352	0.82	0.14	0.1	0.44	1.9	48.26	1.7	7.56	0.02	0.51	MW	Z	EH
0.25	6.35	M-74	0.88	22.352	1.6	0.28	0.2	0.89	1.3	33.02	2.3	10.23	0.022	0.56	MW	N	MH
0.25	6.35	5248	0.88	22.352	3.1	0.54	0.4	1.78	1	25.4	3.5	15.57	0.026	0.66	MW	Z	MH
0.25	6.35	ZZ4-24	0.88	22.352	6.5	1.14	0.8	3.56	0.81	20.574	6	26.69	0.031	0.79	MW	Z	MH
0.25	6.35	5448	0.88	22.352	12	2.1	0.9	4	0.48	12.192	6.6	29.36	0.032	0.81	MW	Z	MH
0.25	6.35	ZZ1-21	0.91	23.114	8.4	1.47	0.8	3.56	0.45	11.43	4.7	20.91	0.032	0.81	SST	N	MH
0.25	6.35	5237	0.94	23.876	0.73	0.13	0.1	0.44	2.2	55.88	1.7	7.56	0.02	0.51	MW	Z	MH
0.25	6.35	M-48	0.94	23.876	2.3	0.4	0.3	1.33	1.2	30.48	3.1	13.79	0.025	0.64	MW	N	MH
0.25	6.35	ZZ3-26	0.97	24.638	2.2	0.39	0.3	1.33	0.94	23.876	2.4	10.68	0.026	0.66	SST	N	MH
0.25	6.35	5644	0.97	24.638	2.8	0.49	0.4	1.78	1.2	30.48	3.9	17.35	0.027	0.69	MW	Z	MH
0.25	6.35	5480	0.97	24.638	7.7	1.35	0.8	3.56	0.69	17.526	6	26.69	0.031	0.79	MW	Z	MH
0.25	6.35	B3-66	0.97	24.638	15	2.63	2	8.9	0.56	14.224	9.9	44.04	0.037	0.94	MW	N	MH
0.25	6.35	M-4	0.97	24.638	56	9.8	5	22.24	0.271	6.883	21	93.41	0.0475	1.21	SST	N	MH
0.25	6.35	5251	0.98	24.892	5.6	0.98	0.7	3.11	0.85	21.59	5.4	24.02	0.03	0.76	MW	Z	MH
0.25	6.35	5509	1	25.4	0.83	0.15	0.1	0.44	2.2	55.88	2	8.9	0.021	0.53	MW	Z	MH
0.25	6.35	5261	1	25.4	1.4	0.25	0.3	1.33	1.9	48.26	2.9	12.9	0.024	0.61	MW	Z	FL
0.25	6.35	B6-18	1	25.4	1.5	0.26	0.3	1.33	1.2	30.48	2.1	9.34	0.025	0.64	SST	N	MH
0.25	6.35	5959	1	25.4	1.9	0.33	0.3	1.33	1.1	27.94	2.4	10.68	0.026	0.66	SST	N	FL
0.25	6.35	6046	1	25.4	2.5	0.44	0.4	1.78	1.2	30.48	3.5	15.57	0.026	0.66	MW	Z	FL
0.25	6.35	6058	1	25.4	2.5	0.44	0.4	1.78	1.2	30.48	3.5	15.57	0.026	0.66	MW	Z	FL
0.25	6.35	408	1	25.4	4.2	0.74	0.9	4	0.38	9.652	2.4	10.68	0.032	0.81	PB	N	DL
0.25	6.35	F-81	1	25.4	7.5	1.31	0.9	4	0.55	13.97	5	22.24	0.032	0.81	HD	GI	MH
0.25	6.35	5970	1	25.4	22	3.85	2	8.9	0.34	8.636	9.8	43.59	0.041	1.04	SST	N	MH
0.25	6.35	S-528	1	25.4	50	8.75	4	17.79	0.22	5.588	15	66.72	0.047	1.19	SST	N	MH
0.25	6.35	N-32	1	25.4	59	10.33	5	22.24	0.21	5.334	18	80.06	0.049	1.24	SST	N	FL
0.25	6.35	ZZ3-38	1.03	26.162	0.86	0.15	0.1	0.44	2.1	53.34	2	8.9	0.021	0.53	MW	N	FL
0.25	6.35	452	1.03	26.162	1.7	0.3	0.3	1.33	1.6	40.64	3.1	13.79	0.025	0.64	MW	Z	FL
0.25	6.35	B6-6	1.03	26.162	18	3.15	2	8.9	0.38	9.652	9.1	40.48	0.04	1.02	SST	N	MH
0.25	6.35	5073	1.06	26.924	9.7	1.7	0.8	3.56	0.54	13.716	6	26.69	0.031	0.79	MW	Z	EH
0.25	6.35	5377	1.06	26.924	9.7	1.7	0.8	3.56	0.54	13.716	6	26.69	0.031	0.79	MW	Z	MH
0.25																	

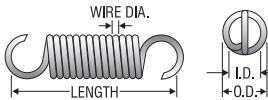


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm		Rate Lbs./In. N/mm		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm		Mat'l	F ns h s e n d s					
		Inches	mm	Lbs./In.	N/mm				Inches	mm							
0.25	6.35	5625	1.16	29.464	23	4.03	3	13.34	0.34	8.636	10	44.48	0.041	1.04	SPR	Z	MH
0.25	6.35	S-630	1.19	30.226	1.3	0.23	0.2	0.89	1.2	30.48	1.7	7.56	0.023	0.58	SST	N	EH
0.25	6.35	5391	1.19	30.226	1.5	0.26	0.3	1.33	1.8	45.72	3.1	13.79	0.025	0.64	MW	Z	MH
0.25	6.35	5249	1.19	30.226	3	0.53	0.6	2.67	1.4	35.56	4.9	21.8	0.029	0.74	MW	Z	MH
0.25	6.35	5804	1.22	30.988	21	3.68	2	8.9	0.35	8.89	9.6	42.7	0.04	1.02	SPR	Z	MH
0.25	6.35	N-102	1.25	31.75	0.81	0.14	0.2	0.89	2.9	73.66	2.5	11.12	0.023	0.58	MW	N	FL
0.25	6.35	5343	1.25	31.75	4.5	0.79	0.8	3.56	1.2	30.48	6	26.69	0.031	0.79	MW	BO	MH
0.25	6.35	5963	1.25	31.75	9.3	1.63	2	8.9	0.59	14.986	7	31.14	0.037	0.94	SST	N	MH
0.25	6.35	B1-53	1.25	31.75	12	2.1	1.6	7.12	0.5	12.7	7.6	33.8	0.038	0.97	SPR	GI	FL
0.25	6.35	5410	1.28	32.512	3.8	0.67	0.7	3.11	1.3	33.02	5.4	24.02	0.03	0.76	MW	N	FL
0.25	6.35	ZZ2-48	1.28	32.512	4.5	0.79	0.8	3.56	1.2	30.48	6	26.69	0.031	0.79	MW	BO	MH
0.25	6.35	B3-26	1.31	33.274	5.3	0.93	1	4.45	0.85	21.59	5.5	24.46	0.033	0.84	SPR	Z	MH
0.25	6.35	S-529	1.38	35.052	0.07	0.01	0.03	0.13	6.6	167.64	0.48	2.14	0.015	0.38	SST	N	MH
0.25	6.35	S-530	1.38	35.052	0.27	0.05	0.1	0.44	3.8	96.52	1.1	4.89	0.02	0.51	SST	N	MH
0.25	6.35	B1-39	1.38	35.052	1.6	0.28	0.4	1.78	2	50.8	3.5	15.57	0.026	0.66	MW	BO	FL
0.25	6.35	ZZ2-17	1.38	35.052	9	1.58	2	8.9	0.61	15.494	7	31.14	0.037	0.94	SST	N	MH
0.25	6.35	435	1.41	35.814	4.3	0.75	0.9	4	1.4	35.56	6.6	29.36	0.032	0.81	MW	Z	MH
0.25	6.35	ZZ2-38	1.44	36.576	2.3	0.4	0.5	2.22	1.7	43.18	4.4	19.57	0.028	0.71	MW	Z	MH
0.25	6.35	425	1.44	36.576	12	2.1	2	8.9	0.55	13.97	8.8	39.14	0.039	0.99	SPR	Z	FL
0.25	6.35	ZZ3-60	1.47	37.338	1.2	0.21	0.3	1.33	1.7	43.18	2.4	10.68	0.026	0.66	SST	N	MH
0.25	6.35	171-A	1.5	38.1	0.07	0.01	0.04	0.18	9.4	238.76	0.71	3.16	0.015	0.38	MW	Z	FL
0.25	6.35	256-A	1.5	38.1	0.12	0.02	0.05	0.22	7.1	180.34	0.87	3.87	0.016	0.41	MW	Z	FL
0.25	6.35	S-531	1.5	38.1	0.13	0.02	0.06	0.27	5.1	129.54	0.7	3.11	0.017	0.43	SST	N	MH
0.25	6.35	254-A	1.5	38.1	0.19	0.03	0.08	0.36	6.2	157.48	1.2	5.34	0.018	0.46	MW	Z	MH
0.25	6.35	172-A	1.5	38.1	0.32	0.06	0.1	0.44	4.8	121.92	1.7	7.56	0.02	0.51	MW	Z	FL
0.25	6.35	173-A	1.5	38.1	0.7	0.12	0.2	0.89	3.3	83.82	2.5	11.12	0.023	0.58	MW	Z	FL
0.25	6.35	5344	1.5	38.1	0.94	0.16	0.3	1.33	2.8	71.12	2.9	12.9	0.024	0.61	MW	Z	MH
0.25	6.35	5960	1.5	38.1	1.1	0.19	0.3	1.33	1.9	48.26	2.4	10.68	0.026	0.66	SST	N	FL
0.25	6.35	S-532	1.5	38.1	1.1	0.19	0.3	1.33	1.9	48.26	2.4	10.68	0.026	0.66	SST	N	MH
0.25	6.35	183-A	1.5	38.1	6.4	1.12	1	4.45	1.1	27.94	8.4	37.36	0.035	0.89	MW	Z	FL
0.25	6.35	5846	1.5	38.1	8.3	1.45	2	8.9	0.7	17.78	7.5	33.36	0.037	0.94	SPR	Z	FL
0.25	6.35	B5-36	1.53	38.862	3.7	0.65	0.9	4	1.1	27.94	5	22.24	0.032	0.81	SPR	GI	MH
0.25	6.35	M-63	1.56	39.624	1.3	0.23	0.4	1.78	1.8	45.72	2.7	12.01	0.027	0.69	SST	N	MH
0.25	6.35	579	1.56	39.624	17	2.98	3	13.34	0.46	11.684	10	44.48	0.041	1.04	SPR	Z	MH
0.25	6.35	S-618	1.56	39.624	14	2.45	2	8.9	0.53	13.462	9.8	43.59	0.041	1.04	SST	N	MH
0.25	6.35	ZZ2-11	1.59	40.386	0.63	0.11	0.2	0.89	2.4	60.96	1.7	7.56	0.023	0.58	SST	N	FL
0.25	6.35	S-614	1.59	40.386	8.4	1.47	2	8.9	0.71	18.034	7.7	34.25	0.038	0.97	SST	N	MH
0.25	6.35	5260	1.61	40.894	2.6	0.46	0.7	3.11	1.8	45.72	5.4	24.02	0.03	0.76	MW	Z	MH
0.25	6.35	N-48	1.63	41.402	0.87	0.15	0.3	1.33	2.1	53.34	2.1	9.34	0.025	0.64	SST	N	MH
0.25	6.35	5189	1.63	41.402	1.7	0.3	0.4	1.78	2.1	53.34	3.9	17.35	0.027	0.69	MW	Z	FL
0.25	6.35	S-533	1.63	41.402	3.2	0.56	0.8	3.56	1.2	30.48	4.7	20.91	0.032	0.81	SST	N	MH
0.25	6.35	5964	1.63	41.402	6.7	1.17	2	8.9	0.82	20.828	7	31.14	0.037	0.94	SST	N	FL
0.25	6.35	5971	1.63	41.402	12	2.1	2	8.9	0.62	15.748	9.8	43.59	0.041	1.04	SST	N	FL
0.25	6.35	B6-24	1.63	41.402	13	2.28	3	13.34	0.59	14.986	10	44.48	0.041	1.04	SPR	N	FL
0.25	6.35	500	1.66	42.164	3.6	0.63	0.9	4	1.6	40.64	6.6	29.36	0.032	0.81	MW	Z	MH
0.25	6.35	S-534	1.75	44.45	0.05	0.01	0.03	0.13	9.1	231.14	0.48	2.14	0.015	0.38	SST	N	MH
0.25	6.35	S-535	1.75	44.45	0.22	0.04	0.1	0.44	4.6	116.84	1.1	4.89	0.02	0.51	SST	N	FL
0.25	6.35	S-536	1.75	44.45	0.92	0.16	0.3	1.33	2.3	58.42	2.4	10.68	0.026	0.66	SST	N	FL
0.25	6.35	N-98	1.75	44.45	1.4	0.25	0.5	2.22	1.9	48.26	3.1	13.79	0.028	0.71	SST	N	MH
0.25	6.35	5972	1.75	44.45	11	1.93	2	8.9	0.68	17.272	9.8	43.59	0.041	1.04	SST	N	FL
0.25	6.35	A12-35	1.75	44.45	14	2.45	3	13.34	0.57	14.478	10	44.48	0.041	1.04	HD	Z	FL
0.25	6.35	559	1.78	45.212	0.04	0.01	0.03	0.13	15	381	0.64	2.85	0.014	0.36	MW	Z	MH
0.25	6.35	5517	1.78	45.212	2.2	0.39	0.7	3.11	2.1	53.34	5.4	24.02	0.03	0.76	MW	Z	MH
0.25	6.35	ZZ2-16	1.81	45.974	0.62	0.11	0.2	0.89	2.8	71.12	2	8.9	0.024	0.61	SST	N	MH
0.25	6.35	446	1.81	45.974	6.1	1.07	1	4.45	0.88	22.352	6.8	30.25	0.036	0.91	SPR	Z	MH
0.25	6.35	171-B	1.88	47.752	0.05	0.01	0.04	0.18	13	330.2	0.71	3.16	0.015	0.38	MW	Z	FL
0.25	6.35	256-B	1.88	47.752	0.08	0.01	0.05	0.22	11	279.4	0.87	3.87	0.016	0.41	MW	Z	FL
0.25	6.35	S-537	1.88	47.752	0.09	0.02	0.06	0.27	7	177.8	0.7	3.11	0.017	0.43	SST	N	FL
0.25	6.35	254-B	1.88	47.752	0.15	0.03	0.08	0.36	7.8	198.12	1.2	5.34	0.018	0.46	MW	Z	MH
0.25	6.35	172-B	1.88	47.752	0.25	0.04	0.1	0.44	6.4	162.56	1.7	7.56	0.02	0.51	MW	Z	MH
0.25	6.35	173-B	1.88	47.752	0.51	0.09	0.2	0.89	4.5	114.3	2.5	11.12	0.023	0.58	MW	Z	FL
0.25	6.35	B1-51	1.88	47.752	0.86	0.15	0.3	1.33	3.3	83.82	3.1	13.79	0.025	0.64	MW	GI	FL
0.25	6.35	S-538	1.88	47.752	2.6	0.46	0.8	3.56	1.5	38.1	4.7	20.91	0.032	0.81	SST	N	MH
0.25	6.35	183-B	1.88	47.752	4.7	0.82	1	4.45	1.5	38.1	8.4	37.36	0.035	0.89	MW	Z	FL
0.25	6.35	5847	1.88	47.752	6.4	1.12	2	8.9	0.91	23.114	7.5	33.36	0.037	0.94	SPR	Z	FL
0.25	6.35	5259	1.91	48.514	14	2.45	3	13.34	0.6	15.24	11	48.93	0.042	1.07	SPR	Z	MH
0.25	6.35	5206	1.94	49.276	1.4	0.25	0.5	2.22	2.8	71.12	4.4</td						




O.D. Inches mm	Century Stock Number	Length Inches mm	Rate Lbs./In. N/mm	Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm	Mat'l	F	E							
									Inch	mm							
0.25	6.35	S-647	2.16	54.864	0.97	0.17	0.4	1.78	2.4	60.96	2.7	12.01	0.027	0.69	SST	N	FL
0.25	6.35	S-654	2.25	57.15	0.29	0.05	0.2	0.89	4.7	119.38	1.5	6.67	0.022	0.56	SST	N	MH
0.25	6.35	5677	2.25	57.15	0.76	0.13	0.3	1.33	3.7	93.98	3.1	13.79	0.025	0.64	MW	Z	MH
0.25	6.35	S-543	2.25	57.15	2.1	0.37	0.8	3.56	1.8	45.72	4.7	20.91	0.032	0.81	SST	N	MH
0.25	6.35	5973	2.25	57.15	8.1	1.42	2	8.9	0.91	23.114	9.8	43.59	0.041	1.04	SST	N	FL
0.25	6.35	301	2.31	58.674	1.7	0.3	0.7	3.11	2.9	73.66	5.4	24.02	0.03	0.76	MW	Z	FL
0.25	6.35	B1-35	2.34	59.436	7.3	1.28	2	8.9	0.88	22.352	8.3	36.92	0.039	0.99	SST	N	FL
0.25	6.35	ZZ1-59	2.38	60.452	54	9.45	0.05	0.22	0.02	0.508	0.87	3.87	0.016	0.41	MW	Z	MH
0.25	6.35	S-544	2.38	60.452	0.64	0.11	0.3	1.33	3.2	81.28	2.4	10.68	0.026	0.66	SST	N	MH
0.25	6.35	B17-162	2.38	60.452	1.3	0.23	0.6	2.67	3.3	83.82	4.9	21.8	0.029	0.74	MW	Z	FL
0.25	6.35	5541	2.38	60.452	2.6	0.46	0.9	4	2.2	55.88	6.6	29.36	0.032	0.81	MW	Z	MH
0.25	6.35	5836	2.38	60.452	3.3	0.58	1	4.45	2.1	53.34	8	35.58	0.034	0.86	MW	Z	MH
0.25	6.35	5912	2.38	60.452	7.5	1.31	2	8.9	0.97	24.638	9.6	42.7	0.04	1.02	SPR	Z	FL
0.25	6.35	5966	2.38	60.452	6.7	1.17	2	8.9	1	25.4	9.1	40.48	0.04	1.02	SST	N	FL
0.25	6.35	441	2.44	61.976	0.47	0.08	0.3	1.33	5.6	142.24	2.9	12.9	0.024	0.61	MW	Z	MH
0.25	6.35	5204	2.44	61.976	1.1	0.19	0.5	2.22	3.4	86.36	4.4	19.57	0.028	0.71	MW	Z	MH
0.25	6.35	171-C	2.5	63.5	0.04	0.01	0.04	0.18	17	431.8	0.71	3.16	0.015	0.38	MW	Z	FL
0.25	6.35	256-C	2.5	63.5	0.06	0.01	0.05	0.22	15	381	0.87	3.87	0.016	0.41	MW	Z	FL
0.25	6.35	254-C	2.5	63.5	0.1	0.02	0.08	0.36	11	279.4	1.2	5.34	0.018	0.46	MW	Z	MH
0.25	6.35	172-C	2.5	63.5	0.17	0.03	0.1	0.44	9	228.6	1.7	7.56	0.02	0.51	MW	Z	MH
0.25	6.35	173-C	2.5	63.5	0.37	0.06	0.2	0.89	6.3	160.02	2.5	11.12	0.023	0.58	MW	Z	FL
0.25	6.35	ZZ2-67	2.5	63.5	1.9	0.33	0.8	3.56	2.7	68.58	6	26.69	0.031	0.79	MW	Z	MH
0.25	6.35	S-545	2.5	63.5	1.9	0.33	0.8	3.56	2	50.8	4.7	20.91	0.032	0.81	SST	N	FL
0.25	6.35	183-C	2.5	63.5	3.5	0.61	1	4.45	2.1	53.34	8.4	37.36	0.035	0.89	MW	Z	FL
0.25	6.35	5967	2.5	63.5	4.1	0.72	2	8.9	1.3	33.02	7	31.14	0.037	0.94	SST	N	FL
0.25	6.35	5850	2.5	63.5	8.1	1.42	3	13.34	0.96	24.384	10	44.48	0.041	1.04	SPR	Z	FL
0.25	6.35	B3-31	2.68	68.072	16	2.8	5	22.24	0.71	18.034	16	71.17	0.047	1.19	SPR	Z	MH
0.25	6.35	S-546	2.75	69.85	1.7	0.3	0.8	3.56	2.3	58.42	4.7	20.91	0.032	0.81	SST	N	MH
0.25	6.35	5968	2.75	69.85	3.7	0.65	2	8.9	1.5	38.1	7	31.14	0.037	0.94	SST	N	FL
0.25	6.35	5974	2.75	69.85	6.5	1.14	2	8.9	1.1	27.94	9.8	43.59	0.041	1.04	SST	N	FL
0.25	6.35	S-547	2.75	69.85	14	2.45	4	17.79	0.78	19.812	15	66.72	0.047	1.19	SST	N	MH
0.25	6.35	447	2.92	74.168	1.1	0.19	0.6	2.67	2.9	73.66	3.8	16.9	0.03	0.76	SST	N	MH
0.25	6.35	M-136	2.94	74.676	1.2	0.21	0.7	3.11	3.9	99.06	5.4	24.02	0.03	0.76	MW	Z	FL
0.25	6.35	110	3	76.2	0.9	0.16	0.5	2.22	4.4	111.76	4.4	19.57	0.028	0.71	MW	Z	MH
0.25	6.35	5273-A	3	76.2	1.5	0.26	0.8	3.56	3.6	91.44	6	26.69	0.031	0.79	MW	Z	MH
0.25	6.35	209	3	76.2	2.4	0.42	1	4.45	2.8	71.12	8	35.58	0.034	0.86	MW	Z	MH
0.25	6.35	5969	3	76.2	3.3	0.58	2	8.9	1.6	40.64	7	31.14	0.037	0.94	SST	N	FL
0.25	6.35	5913	3	76.2	4.4	0.77	2	8.9	1.4	35.56	8.1	36.03	0.038	0.97	SPR	Z	FL
0.25	6.35	5590	3	76.2	7.1	1.24	3	13.34	1.1	27.94	10	44.48	0.041	1.04	SPR	Z	MH
0.25	6.35	5975	3	76.2	5.9	1.03	2	8.9	1.3	33.02	9.8	43.59	0.041	1.04	SST	N	FL
0.25	6.35	309	3.25	82.55	0.44	0.08	0.3	1.33	6.4	162.56	3.1	13.79	0.025	0.64	MW	Z	FL
0.25	6.35	S-548	3.25	82.55	1.4	0.25	0.8	3.56	2.7	68.58	4.7	20.91	0.032	0.81	SST	N	FL
0.25	6.35	5976	3.25	82.55	5.4	0.95	2	8.9	1.4	35.56	9.8	43.59	0.041	1.04	SST	N	MH
0.25	6.35	ZZ4-37	3.25	82.55	10	1.75	4	17.79	0.98	24.892	14	62.27	0.046	1.17	SST	N	MH
0.25	6.35	O-58	3.34	84.836	1.5	0.26	0.9	4	2.7	68.58	5	22.24	0.032	0.81	SPR	Z	SL
0.25	6.35	5851	3.5	88.9	5.6	0.98	3	13.34	1.4	35.56	10	44.48	0.041	1.04	SPR	Z	FL
0.25	6.35	A10-43	3.59	91.186	2.3	0.4	1	4.45	2.2	55.88	6.3	28.02	0.035	0.89	SPR	N	MH
0.25	6.35	5470	3.94	100.076	0.67	0.12	0.5	2.22	5.8	147.32	4.4	19.57	0.028	0.71	MW	Z	MH
0.25	6.35	5228	4	101.6	0.65	0.11	0.5	2.22	6	152.4	4.4	19.57	0.028	0.71	MW	Z	MH
0.25	6.35	480	4.88	123.952	1.4	0.25	1	4.45	4.9	124.46	8	35.58	0.034	0.86	MW	Z	MH
0.25	6.35	149	5	127	0.84	0.15	0.8	3.56	4.4	111.76	4.5	20.02	0.031	0.79	HD	Z	FL
0.25	6.35	208	5	127	1.4	0.25	1	4.45	3.5	88.9	6	26.69	0.034	0.86	HD	Z	FL
0.25	6.35	85	6	152.4	0.42	0.07	0.5	2.22	9.3	236.22	4.4	19.57	0.028	0.71	MW	Z	MH
0.25	6.35	5593	6	152.4	0.84	0.15	0.9	4	4.9	124.46	5	22.24	0.032	0.81	HD	Z	MH
0.25	6.35	645	6	152.4	1.1	0.19	1	4.45	4.3	109.22	6	26.69	0.034	0.86	HD	Z	MH
0.25	6.35	547	7.06	179.324	13	2.28	9	40.03	1.2	30.48	25	111.2	0.054	1.37	HD	Z	MH
0.25	6.35	5818	7.13	181.102	20	3.5	12	53.38	1.4	35.56	39	173.47	0.058	1.47	MW	Z	MH
0.25	6.35	5817	8	203.2	0.62	0.11	0.9	4	9.4	238.76	6.6	29.36	0.032	0.81	MW	Z	FL
0.25	6.35	5268	8	203.2	2.1	0.37	2	8.9	3.5	88.9	9.6	42.7	0.04	1.02	SPR	Z	MH
0.25	6.35	584	10.5	266.7	0.64	0.11	1	4.45	11	279.4	8	35.58	0.034	0.86	MW	Z	MH
0.25	6.35	5002	12	304.8	0.65	0.11	1	4.45	11	279.4	8.4	37.36	0.035	0.89	MW	Z	FL
0.266	6.756	ZZ1-66	0.5	12.7	35	6.13	1	4.45	0.16	4.064	7	31.14	0.037	0.94	SPR	Z	MH
0.266	6.756	ZZ4-31	0.63	16.002	8.7	1.52	0.3	1.33	0.34	8.636	3.3	14.68	0.026	0.66	MW	N	MH
0.266	6.756	5624	0.63	16.002	27	4.73	1	4.45	0.18	4.572	5.9	26.24	0.035	0.89	SPR	Z	MH
0.266	6.756	5764	1.16	29.464	4.1	0.72	0.7	3.11	1.2	30.48	5.6	24.91	0.031	0.79	MW	Z	MH
0.266	6.756	5636	1.25	31.75	1.3	0.23	0.3	1.33	2	50.8	2.9	12.9	0.025	0.64	MW	Z	FL
0.266	6.756	5455	1.44	36.576	6	1.05	1	4.45	0.8	20.32	5.9	26.24	0.035	0.89	SPR	N	FL
0.266	6.756	497	1.53	38.862	7.3	1.28	1	4.45	1.1	27.94	9.3	41.37	0.037	0.94	MW	Z	

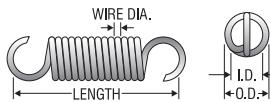


Century Spring

Extension Springs

O.D.		Century Stock Number	Length		Rate		Initial Tension		Sugg Max. Defl.		Sugg Max. load		Wire Dia.		Fns	Ends	
Inches	mm		Inches	mm	Lbs./In.	N/mm	Lbs.	N	Inches	mm	Lbs.	N	Inches	mm	Mat'l		
0.281	7.137	409	1	25.4	4.5	0.79	0.5	2.22	0.98	24.892	4.9	21.8	0.034	0.86	PB	N	DL
0.281	7.137	ZZ1-65	1.03	26.162	0.95	0.17	0.1	0.44	2	50.8	2	8.9	0.022	0.56	MW	Z	FL
0.281	7.137	5626	1.13	28.702	4.7	0.82	0.8	3.56	0.86	21.844	4.8	21.35	0.033	0.84	SPR	Z	MH
0.281	7.137	5346	1.25	31.75	2.6	0.46	0.3	1.33	1.1	27.94	3.1	13.79	0.026	0.66	MW	Z	MH
0.281	7.137	S-615	1.31	33.274	21	3.68	3	13.34	0.41	10.414	11	48.93	0.045	1.14	SST	N	MH
0.281	7.137	ZZ3-35	1.34	34.036	14	2.45	2	8.9	0.51	12.954	9	40.03	0.041	1.04	SPR	N	SH
0.281	7.137	N-141	1.38	35.052	13	2.28	2	8.9	0.55	13.97	9	40.03	0.041	1.04	SPR	N	MH
0.281	7.137	578	1.47	37.338	12	2.1	2	8.9	0.59	14.986	9	40.03	0.041	1.04	SPR	Z	SH
0.281	7.137	174-A	1.5	38.1	0.07	0.01	0.04	0.18	10	254	0.77	3.42	0.016	0.41	MW	Z	FL
0.281	7.137	255-A	1.5	38.1	0.13	0.02	0.06	0.27	8.1	205.74	1.1	4.89	0.018	0.46	MW	Z	FL
0.281	7.137	5571	1.5	38.1	0.56	0.1	0.2	0.89	3.8	96.52	2.3	10.23	0.023	0.58	MW	Z	MH
0.281	7.137	175-A	1.5	38.1	0.74	0.13	0.2	0.89	3.4	86.36	2.8	12.45	0.025	0.64	MW	Z	FL
0.281	7.137	S-617	1.5	38.1	3.8	0.67	0.9	4	1.1	27.94	5.2	23.13	0.035	0.89	SST	N	MH
0.281	7.137	174-B	1.88	47.752	0.06	0.01	0.04	0.18	13	330.2	0.77	3.42	0.016	0.41	MW	Z	FL
0.281	7.137	255-B	1.88	47.752	0.1	0.02	0.06	0.27	10	254	1.1	4.89	0.018	0.46	MW	Z	FL
0.281	7.137	175-B	1.88	47.752	0.54	0.09	0.2	0.89	4.7	119.38	2.8	12.45	0.025	0.64	MW	Z	FL
0.281	7.137	ZZ4-29	2.25	57.15	0.79	0.14	0.4	1.78	4.4	111.76	3.9	17.35	0.028	0.71	MW	Z	MH
0.281	7.137	422	2.25	57.15	0.97	0.17	0.4	1.78	4	101.6	4.3	19.13	0.029	0.74	MW	Z	EH
0.281	7.137	5545	2.25	57.15	14	2.45	3	13.34	0.75	19.05	14	62.27	0.047	1.19	SPR	GI	SH
0.281	7.137	5121	2.34	59.436	6.5	1.14	2	8.9	1.1	27.94	9	40.03	0.041	1.04	SPR	Z	SH
0.281	7.137	B17-129	2.5	63.5	0.03	0.01	0.03	0.13	22	558.8	0.63	2.8	0.015	0.38	MW	Z	FL
0.281	7.137	174-C	2.5	63.5	0.04	0.01	0.04	0.18	19	482.6	0.77	3.42	0.016	0.41	MW	Z	FL
0.281	7.137	255-C	2.5	63.5	0.07	0.01	0.06	0.27	15	381	1.1	4.89	0.018	0.46	MW	Z	FL
0.281	7.137	175-C	2.5	63.5	0.39	0.07	0.2	0.89	6.5	165.1	2.8	12.45	0.025	0.64	MW	Z	FL
0.281	7.137	5170	2.5	63.5	2.9	0.51	1	4.45	1.6	40.64	5.5	24.46	0.035	0.89	SPR	Z	MH
0.281	7.137	M-69	2.69	68.326	73	12.78	15	66.72	0.33	8.382	39	173.47	0.065	1.65	SPR	N	MH
0.281	7.137	310	3.25	82.55	0.53	0.09	0.4	1.78	6.6	167.64	3.9	17.35	0.028	0.71	MW	Z	FL
0.281	7.137	312	3.38	85.852	0.28	0.05	0.2	0.89	9.2	233.68	2.8	12.45	0.025	0.64	MW	Z	FL
0.281	7.137	5191	3.94	100.076	1.5	0.26	1	4.45	4.4	111.76	7.4	32.92	0.035	0.89	MW	Z	MH
0.281	7.137	5591	5.88	149.352	0.93	0.16	1	4.45	4.9	124.46	5.5	24.46	0.035	0.89	SPR	Z	MH
0.281	7.137	84	6	152.4	0.8	0.14	0.9	4	5.5	139.7	5.3	23.57	0.034	0.86	SPR	Z	MH
0.281	7.137	12380	6	152.4	0.89	0.16	1	4.45	5.1	129.54	5.5	24.46	0.035	0.89	SPR	Z	MH
0.281	7.137	5264	7.88	200.152	0.69	0.12	1	4.45	6.6	167.64	5.5	24.46	0.035	0.89	SPR	Z	MH
0.281	7.137	5380	9	228.6	1.8	0.32	2	8.9	4.5	114.3	10	44.48	0.043	1.09	SPR	Z	MH
0.296	7.518	433	0.72	18.288	24	4.2	2	8.9	0.28	7.112	8.6	38.25	0.041	1.04	SPR	Z	MH
0.296	7.518	ZZ1-22	0.72	18.288	36	6.3	2	8.9	0.18	4.572	8.1	36.03	0.041	1.04	SST	N	FL
0.296	7.518	5239	0.81	20.574	202	35.35	9	40.03	0.09	2.286	28	124.54	0.06	1.52	SPR	Z	MH
0.296	7.518	6086	1.12	28.448	7.1	1.24	1	4.45	0.68	17.272	5.8	25.8	0.037	0.94	SST	N	MH
0.296	7.518	M-53	1.31	33.274	2.1	0.37	0.5	2.22	2.1	53.34	5	22.24	0.031	0.79	MW	Z	MH
0.296	7.518	6048	1.63	41.402	13	2.28	2	8.9	0.49	12.446	8.1	36.03	0.041	1.04	SST	N	EH
0.296	7.518	ZZ4-68	1.75	44.45	1.5	0.26	0.4	1.78	2.6	66.04	4.5	20.02	0.03	0.76	MW	Z	MH
0.296	7.518	434	2.03	51.562	6.3	1.1	2	8.9	1.1	27.94	8.6	38.25	0.041	1.04	SPR	Z	FL
0.296	7.518	86	4.25	107.95	2.6	0.46	2	8.9	2.7	68.58	8.6	38.25	0.041	1.04	SPR	Z	MH
0.3	7.62	80392	0.75	19.05	25	4.38	0.7	3.11	0.28	7.112	7.7	34.25	0.037	0.94	MW	N	FL
0.3	7.62	80392S	0.75	19.05	22	3.85	0.6	2.67	0.22	5.588	5.3	23.57	0.037	0.94	SST	N	FL
0.3	7.62	80372	1	25.4	3.5	0.61	0.4	1.78	1.2	30.48	4.4	19.57	0.03	0.76	MW	N	FL
0.3	7.62	80372S	1	25.4	3	0.53	0.3	1.33	0.9	22.86	3	13.34	0.03	0.76	SST	N	FL
0.3	7.62	80381	1	25.4	4.7	0.82	0.4	1.78	0.95	24.13	4.8	21.35	0.031	0.79	MW	N	FL
0.3	7.62	80381S	1	25.4	4	0.7	0.3	1.33	0.74	18.796	3.3	14.68	0.031	0.79	SST	N	FL
0.3	7.62	80393	1	25.4	10	1.75	0.7	3.11	0.68	17.272	7.8	34.69	0.037	0.94	MW	N	FL
0.3	7.62	80393S	1	25.4	8.8	1.54	0.6	2.67	0.54	13.716	5.4	24.02	0.037	0.94	SST	N	FL
0.3	7.62	80404	1	25.4	22	3.85	1	4.45	0.48	12.192	12	53.38	0.043	1.09	MW	N	FL
0.3	7.62	80404S	1	25.4	19	3.33	1	4.45	0.38	9.652	8.3	36.92	0.043	1.09	SST	N	FL
0.3	7.62	80415	1	25.4	43	7.53	2	8.9	0.36	9.144	17	75.62	0.049	1.24	MW	N	FL
0.3	7.62	80415S	1	25.4	37	6.48	1	4.45	0.29	7.366	12	53.38	0.049	1.24	SST	N	FL
0.3	7.62	80426	1	25.4	88	15.4	2	8.9	0.23	5.842	23	102.3	0.055	1.4	MW	N	FL
0.3	7.62	80426S	1	25.4	75	13.13	2	8.9	0.18	4.572	16	71.17	0.055	1.4	SST	N	FL
0.3	7.62	80373	1.13	28.702	2.7	0.47	0.4	1.78	1.5	38.1	4.4	19.57	0.03	0.76	MW	N	FL
0.3	7.62	80373S	1.13	28.702	2.3	0.4	0.3	1.33	1.2	30.48	3	13.34	0.03	0.76	SST	N	FL
0.3	7.62	80382	1.13	28.702	3.7	0.65	0.4	1.78	1.2	30.48	4.8	21.35	0.031	0.79	MW	N	FL
0.3	7.62	80382S	1.13	28.702	3.1	0.54	0.3	1.33	0.94	23.876	3.3	14.68	0.031	0.79	SST	N	FL
0.3	7.62	80394	1.13	28.702	8.2	1.44	0.7	3.11	0.86	21.844	7.8	34.69	0.037	0.94	MW	N	FL
0.3	7.62	80394S	1.13	28.702	7	1.23	0.6	2.67	0.68	17.272	5.4	24.02	0.037	0.94	SST	N	FL
0.3	7.62	80405	1.13	28.702	18	3.15	1	4.45	0.6	15.24	12	53.38	0.043	1.09	MW	N	FL
0.3	7.62	80405S	1.13	28.702	15	2.63	1	4.45	0.47	11.938	8.3	36.92	0.043	1.09	SST	N	FL
0.3	7.62	80416	1.13	28.702	36	6.3	2	8.9	0.44	11.176	17	75.62	0.049	1.24	MW	N	FL
0.3	7.62	80416S	1.13	28.702	30	5.25	1	4.45	0.35	7.366	23	102.3	0.055	1.4	SST	N	FL
0.3	7.62	80427	1.13	28.													




O.D. Inches mm	Century Stock Number	Length Inches mm	Rate Lbs./In. N/mm	Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm	Mat'l	F	E							
									in	sh							
0.3	7.62	80428S	1.25	31.75	51	8.93	2	8.9	0.27	6.858	16	71.17	0.055	1.4	SST	N	FL
0.3	7.62	80375	1.38	35.052	1.9	0.33	0.4	1.78	2.1	53.34	4.4	19.57	0.03	0.76	MW	N	FL
0.3	7.62	80375S	1.38	35.052	1.6	0.28	0.3	1.33	1.7	43.18	3	13.34	0.03	0.76	SST	N	FL
0.3	7.62	80384	1.38	35.052	2.6	0.46	0.4	1.78	1.7	43.18	4.8	21.35	0.031	0.79	MW	N	FL
0.3	7.62	80384S	1.38	35.052	2.2	0.39	0.3	1.33	1.3	33.02	3.3	14.68	0.031	0.79	SST	N	FL
0.3	7.62	80396	1.38	35.052	5.9	1.03	0.7	3.11	1.2	30.48	7.8	34.69	0.037	0.94	MW	N	FL
0.3	7.62	80396S	1.38	35.052	5	0.88	0.6	2.67	0.95	24.13	5.4	24.02	0.037	0.94	SST	N	FL
0.3	7.62	80407	1.38	35.052	13	2.28	1	4.45	0.84	21.336	12	53.38	0.043	1.09	MW	N	FL
0.3	7.62	80407S	1.38	35.052	11	1.93	1	4.45	0.66	16.764	8.3	36.92	0.043	1.09	SST	N	FL
0.3	7.62	80418	1.38	35.052	26	4.55	2	8.9	0.6	15.24	17	75.62	0.049	1.24	MW	N	FL
0.3	7.62	80418S	1.38	35.052	22	3.85	1	4.45	0.47	11.938	12	53.38	0.049	1.24	SST	N	FL
0.3	7.62	80429	1.38	35.052	52	9.1	2	8.9	0.4	10.16	23	102.3	0.055	1.4	MW	N	FL
0.3	7.62	80429S	1.38	35.052	44	7.7	2	8.9	0.31	7.874	16	71.17	0.055	1.4	SST	N	FL
0.3	7.62	80376	1.5	38.1	1.7	0.3	0.4	1.78	2.4	60.96	4.4	19.57	0.03	0.76	MW	N	FL
0.3	7.62	80376S	1.5	38.1	1.4	0.25	0.3	1.33	1.9	48.26	3	13.34	0.03	0.76	SST	N	FL
0.3	7.62	80385	1.5	38.1	2.2	0.39	0.4	1.78	2	50.8	4.8	21.35	0.031	0.79	MW	N	FL
0.3	7.62	80385S	1.5	38.1	1.9	0.33	0.3	1.33	1.6	40.64	3.3	14.68	0.031	0.79	SST	N	FL
0.3	7.62	80397	1.5	38.1	5.2	0.91	0.7	3.11	1.4	35.56	7.8	34.69	0.037	0.94	MW	N	FL
0.3	7.62	80397S	1.5	38.1	4.4	0.77	0.6	2.67	1.1	27.94	5.4	24.02	0.037	0.94	SST	N	FL
0.3	7.62	80408	1.5	38.1	11	1.93	1	4.45	0.96	24.384	12	53.38	0.043	1.09	MW	N	FL
0.3	7.62	80408S	1.5	38.1	9.6	1.68	1	4.45	0.75	19.05	8.3	36.92	0.043	1.09	SST	N	FL
0.3	7.62	80419	1.5	38.1	23	4.03	2	8.9	0.68	17.272	17	75.62	0.049	1.24	MW	N	FL
0.3	7.62	80419S	1.5	38.1	20	3.5	1	4.45	0.53	13.462	12	53.38	0.049	1.24	SST	N	FL
0.3	7.62	80430	1.5	38.1	45	7.88	2	8.9	0.45	11.43	23	102.3	0.055	1.4	MW	N	FL
0.3	7.62	80430S	1.5	38.1	39	6.83	2	8.9	0.35	8.89	16	71.17	0.055	1.4	SST	N	FL
0.3	7.62	80377	1.75	44.45	1.3	0.23	0.4	1.78	3.1	78.74	4.4	19.57	0.03	0.76	MW	N	FL
0.3	7.62	80377S	1.75	44.45	1.1	0.19	0.3	1.33	2.4	60.96	3	13.34	0.03	0.76	SST	N	FL
0.3	7.62	80386	1.75	44.45	1.8	0.32	0.4	1.78	2.5	63.5	4.8	21.35	0.031	0.79	MW	N	FL
0.3	7.62	80386S	1.75	44.45	1.5	0.26	0.3	1.33	1.9	48.26	3.3	14.68	0.031	0.79	SST	N	FL
0.3	7.62	80398	1.75	44.45	4.1	0.72	0.7	3.11	1.7	43.18	7.8	34.69	0.037	0.94	MW	N	FL
0.3	7.62	80398S	1.75	44.45	3.4	0.6	0.6	2.67	1.4	35.56	5.4	24.02	0.037	0.94	SST	N	FL
0.3	7.62	80409	1.75	44.45	9	1.58	1	4.45	1.2	30.48	12	53.38	0.043	1.09	MW	N	FL
0.3	7.62	80409S	1.75	44.45	7.7	1.35	1	4.45	0.94	23.876	8.3	36.92	0.043	1.09	SST	N	FL
0.3	7.62	80420	1.75	44.45	18	3.15	2	8.9	0.85	21.59	17	75.62	0.049	1.24	MW	N	FL
0.3	7.62	80420S	1.75	44.45	16	2.8	1	4.45	0.67	17.018	12	53.38	0.049	1.24	SST	N	FL
0.3	7.62	80431	1.75	44.45	36	6.3	2	8.9	0.56	14.224	23	102.3	0.055	1.4	MW	N	FL
0.3	7.62	80431S	1.75	44.45	31	5.43	2	8.9	0.44	11.176	16	71.17	0.055	1.4	SST	N	FL
0.3	7.62	80378	2	50.8	1.1	0.19	0.4	1.78	3.7	93.98	4.4	19.57	0.03	0.76	MW	N	FL
0.3	7.62	80378S	2	50.8	0.94	0.16	0.3	1.33	2.9	73.66	3	13.34	0.03	0.76	SST	N	FL
0.3	7.62	80387	2	50.8	1.5	0.26	0.4	1.78	3	76.2	4.8	21.35	0.031	0.79	MW	N	FL
0.3	7.62	80387S	2	50.8	1.3	0.23	0.3	1.33	2.3	58.42	3.3	14.68	0.031	0.79	SST	N	FL
0.3	7.62	80399	2	50.8	3.4	0.6	0.7	3.11	2.1	53.34	7.8	34.69	0.037	0.94	MW	N	FL
0.3	7.62	80399S	2	50.8	2.9	0.51	0.6	2.67	1.6	40.64	5.4	24.02	0.037	0.94	SST	N	FL
0.3	7.62	80410	2	50.8	7.5	1.31	1	4.45	1.4	35.56	12	53.38	0.043	1.09	MW	N	FL
0.3	7.62	80410S	2	50.8	6.4	1.12	1	4.45	1.1	27.94	8.3	36.92	0.043	1.09	SST	N	FL
0.3	7.62	80421	2	50.8	16	2.8	2	8.9	1	25.4	17	75.62	0.049	1.24	MW	N	FL
0.3	7.62	80421S	2	50.8	13	2.28	1	4.45	0.8	20.32	12	53.38	0.049	1.24	SST	N	FL
0.3	7.62	80432	2	50.8	31	5.43	2	8.9	0.67	17.018	23	102.3	0.055	1.4	MW	N	FL
0.3	7.62	80432S	2	50.8	26	4.55	2	8.9	0.53	13.462	16	71.17	0.055	1.4	SST	N	FL
0.3	7.62	80379	2.25	57.15	0.94	0.16	0.4	1.78	4.3	109.22	4.4	19.57	0.03	0.76	MW	N	FL
0.3	7.62	80379S	2.25	57.15	0.8	0.14	0.3	1.33	3.3	83.82	3	13.34	0.03	0.76	SST	N	FL
0.3	7.62	80388	2.25	57.15	1.2	0.21	0.4	1.78	3.7	93.98	4.8	21.35	0.031	0.79	MW	N	FL
0.3	7.62	80388S	2.25	57.15	1	0.18	0.3	1.33	2.9	73.66	3.3	14.68	0.031	0.79	SST	N	FL
0.3	7.62	80400	2.25	57.15	2.9	0.51	0.7	3.11	2.4	60.96	7.8	34.69	0.037	0.94	MW	N	FL
0.3	7.62	80400S	2.25	57.15	2.5	0.44	0.6	2.67	1.9	48.26	5.4	24.02	0.037	0.94	SST	N	FL
0.3	7.62	80411	2.25	57.15	6.5	1.14	1	4.45	1.7	43.18	12	53.38	0.043	1.09	MW	N	FL
0.3	7.62	80411S	2.25	57.15	5.5	0.96	1	4.45	1.3	33.02	8.3	36.92	0.043	1.09	SST	N	FL
0.3	7.62	80422	2.25	57.15	13	2.28	2	8.9	1.2	30.48	17	75.62	0.049	1.24	MW	N	FL
0.3	7.62	80422S	2.25	57.15	11	1.93	1	4.45	0.93	23.622	12	53.38	0.049	1.24	SST	N	FL
0.3	7.62	80433	2.25	57.15	26	4.55	2	8.9	0.78	19.812	23	102.3	0.055	1.4	MW	N	FL
0.3	7.62	80433S	2.25	57.15	22	3.85	2	8.9	0.61	15.494	16	71.17	0.055	1.4	SST	N	FL
0.3	7.62	80380	2.5	63.5	0.83	0.15	0.4	1.78	4.9	124.46	4.4	19.57	0.03	0.76	MW	N	FL
0.3	7.62	80380S	2.5	63.5	0.71	0.12	0.3	1.33	3.8	96.52	3	13.34	0.03	0.76	SST	N	FL
0.3	7.62	80389	2.5	63.5	1.1	0.19	0.4	1.78	4	101.6	4.8	21.35	0.031	0.79	MW	N	FL
0.3	7.62	80389S	2.5	63.5	0.94	0.16	0.3	1.33	3.2	81.28	3.3	14.68	0.031	0.79	SST	N	FL
0.3	7.62	80401	2.5	63.5	2.6	0.46	0.7	3.11	2.7	68.58	7.8	34.69	0.037	0.94	MW	N	FL
0.3	7.62	80401S	2.5	63.5	2.2	0.39	0.6	2.67	2.1	53.34	5.4	24.02	0.037	0.94	SST	N	FL
0.3	7.62	80412	2.5	63.5	5.7	1	1	4.45	1.9	48.26	12	53.38	0.043	1.09	MW	N	FL
0.3	7.62	80412S	2.5	63.5	4.8												

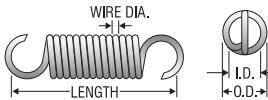


Century Spring

O.D. Inches mm	Century Stock Number	Length		Rate		Initial Tension Lbs. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia.		Mat'l	F n s h e s					
		Inches	mm	Lbs./In.	N/mm				Inches	mm							
0.3	7.62	80424S	2.75	69.85	9.1	1.59	1	4.45	1.2	30.48	12	53.38	0.049	1.24	SST	N	FL
0.3	7.62	80435	2.75	69.85	21	3.68	2	8.9	1	25.4	23	102.3	0.055	1.4	MW	N	FL
0.3	7.62	80435S	2.75	69.85	17	2.98	2	8.9	0.78	19.812	16	71.17	0.055	1.4	SST	N	FL
0.3	7.62	80391	3	76.2	0.9	0.16	0.4	1.78	4.9	124.46	4.8	21.35	0.031	0.79	MW	N	FL
0.3	7.62	80391S	3	76.2	0.77	0.13	0.3	1.33	3.9	99.06	3.3	14.68	0.031	0.79	SST	N	FL
0.3	7.62	80403	3	76.2	2.1	0.37	0.7	3.11	3.5	88.9	7.8	34.69	0.037	0.94	MW	N	FL
0.3	7.62	80403S	3	76.2	1.7	0.3	0.6	2.67	2.7	68.58	5.4	24.02	0.037	0.94	SST	N	FL
0.3	7.62	80414	3	76.2	4.5	0.79	1	4.45	2.4	60.96	12	53.38	0.043	1.09	MW	N	FL
0.3	7.62	80414S	3	76.2	3.8	0.67	1	4.45	1.9	48.26	8.3	36.92	0.043	1.09	SST	N	FL
0.3	7.62	80425	3	76.2	9.6	1.68	2	8.9	1.6	40.64	17	75.62	0.049	1.24	MW	N	FL
0.3	7.62	80425S	3	76.2	8.2	1.44	1	4.45	1.3	33.02	12	53.38	0.049	1.24	SST	N	FL
0.3	7.62	80436	3	76.2	19	3.33	2	8.9	1.1	27.94	23	102.3	0.055	1.4	MW	N	FL
0.3	7.62	80436S	3	76.2	16	2.8	2	8.9	0.87	22.098	16	71.17	0.055	1.4	SST	N	FL
0.312	7.925	5182	0.72	18.288	21	3.68	2	8.9	0.31	7.874	8.1	36.03	0.041	1.04	SPR	N	MH
0.312	7.925	ZZ2-35	0.88	22.352	2.6	0.46	0.3	1.33	0.81	20.574	2.4	10.68	0.028	0.71	SST	N	MH
0.312	7.925	5173	0.88	22.352	38	6.65	3	13.34	0.25	6.35	12	53.38	0.047	1.19	SPR	Z	MH
0.312	7.925	427	0.94	23.876	3.6	0.63	0.5	2.22	1.2	30.48	4.7	20.91	0.031	0.79	MW	Z	MH
0.312	7.925	5246	0.94	23.876	12	2.1	1	4.45	0.39	9.906	5.8	25.8	0.037	0.94	SPR	Z	MH
0.312	7.925	M-97	0.94	23.876	19	3.33	2	8.9	0.39	9.906	9.4	41.81	0.043	1.09	SPR	N	MH
0.312	7.925	S-616	0.97	24.638	1.1	0.19	0.2	0.89	1.6	40.64	1.9	8.45	0.026	0.66	SST	N	MH
0.312	7.925	5203	0.97	24.638	2.8	0.49	0.3	1.33	1.2	30.48	3.5	15.57	0.028	0.71	MW	Z	MH
0.312	7.925	ZZ1-32	1.06	26.924	15	2.63	1	4.45	0.42	10.668	7.6	33.8	0.041	1.04	SST	N	MH
0.312	7.925	M-98	1.13	28.702	1.8	0.32	0.3	1.33	1.9	48.26	3.9	17.35	0.029	0.74	MW	Z	FL
0.312	7.925	5463	1.19	30.226	5.6	0.98	0.4	1.78	0.69	17.526	4.3	19.13	0.03	0.76	MW	N	EH
0.312	7.925	5245	1.19	30.226	5.6	0.98	0.8	3.56	0.73	18.542	4.9	21.8	0.035	0.89	SPR	Z	FL
0.312	7.925	574	1.19	30.226	32	5.6	3	13.34	0.34	8.636	14	62.27	0.049	1.24	SPR	Z	MH
0.312	7.925	S-549	1.25	31.75	0.19	0.03	0.07	0.31	4.5	114.3	0.92	4.09	0.02	0.51	SST	N	MH
0.312	7.925	ZZ2-50	1.25	31.75	0.79	0.14	0.2	0.89	2.9	73.66	2.5	11.12	0.025	0.64	MW	GI	FL
0.312	7.925	S-651	1.25	31.75	4.8	0.84	0.7	3.11	0.8	20.32	4.6	20.46	0.035	0.89	SST	N	FL
0.312	7.925	5174	1.31	33.274	2	0.35	0.5	2.22	2.2	55.88	4.7	20.91	0.031	0.79	MW	Z	FL
0.312	7.925	448	1.34	34.036	19	3.33	3	13.34	0.51	12.954	12	53.38	0.047	1.19	HD	Z	FL
0.312	7.925	572	1.38	35.052	1.1	0.19	0.3	1.33	2.7	68.58	3.1	13.79	0.027	0.69	MW	Z	MH
0.312	7.925	5284	1.38	35.052	9.5	1.66	2	8.9	0.69	17.526	8.1	36.03	0.041	1.04	SPR	Z	MH
0.312	7.925	S-550	1.38	35.052	7.4	1.3	1	4.45	0.84	21.336	7.6	33.8	0.041	1.04	SST	N	MH
0.312	7.925	5255	1.41	35.814	5.3	0.93	1	4.45	0.92	23.368	5.8	25.8	0.037	0.94	SPR	Z	MH
0.312	7.925	ZZ3-22	1.47	37.338	0.47	0.08	0.2	0.89	3.3	83.82	1.7	7.56	0.025	0.64	SST	N	MH
0.312	7.925	475	1.47	37.338	18	3.15	3	13.34	0.56	14.224	13	57.82	0.048	1.22	SPR	Z	MH
0.312	7.925	184-A	1.5	38.1	0.05	0.01	0.03	0.13	13	330.2	0.69	3.07	0.016	0.41	MW	Z	FL
0.312	7.925	176-A	1.5	38.1	0.17	0.03	0.07	0.31	7.7	195.58	1.4	6.23	0.02	0.51	MW	Z	FL
0.312	7.925	178-A	1.5	38.1	0.35	0.06	0.1	0.44	5.5	139.7	2	8.9	0.023	0.58	MW	Z	MH
0.312	7.925	177-A	1.5	38.1	0.54	0.09	0.2	0.89	4.3	109.22	2.5	11.12	0.025	0.64	MW	Z	MH
0.312	7.925	S-551	1.5	38.1	0.55	0.1	0.2	0.89	3.1	78.74	1.9	8.45	0.026	0.66	SST	N	MH
0.312	7.925	ZZ4-3	1.5	38.1	5	0.88	1	4.45	0.98	24.892	5.8	25.8	0.037	0.94	SPR	Z	MH
0.312	7.925	666	1.5	38.1	18	3.15	3	13.34	0.55	13.97	12	53.38	0.047	1.19	HD	Z	DL
0.312	7.925	S-649	1.5	38.1	16	2.8	3	13.34	0.545	13.843	11.7	52.04	0.0475	1.21	SST	N	MH
0.312	7.925	N-119	1.56	39.624	3.4	0.6	0.9	4	1.3	33.02	5.4	24.02	0.036	0.91	SPR	N	FL
0.312	7.925	B18-124	1.56	39.624	56	9.8	8	35.58	0.32	8.128	26	115.65	0.06	1.52	SPR	N	FL
0.312	7.925	S-552	1.63	41.402	1.5	0.26	0.5	2.22	2	50.8	3.6	16.01	0.032	0.81	SST	N	FL
0.312	7.925	5211	1.69	42.926	1.2	0.21	0.3	1.33	2.6	66.04	3.5	15.57	0.028	0.71	MW	Z	FL
0.312	7.925	5216	1.69	42.926	1.1	0.19	0.3	1.33	3.1	78.74	3.9	17.35	0.029	0.74	MW	Z	MH
0.312	7.925	5195	1.69	42.926	3.1	0.54	0.8	3.56	1.3	33.02	4.9	21.8	0.035	0.89	SPR	Z	MH
0.312	7.925	N-139	1.72	43.688	18	3.15	3	13.34	0.59	14.986	14	62.27	0.049	1.24	SPR	Z	MH
0.312	7.925	S-553	1.75	44.445	0.11	0.02	0.07	0.31	7.4	187.96	0.92	4.09	0.02	0.51	SST	N	MH
0.312	7.925	12381	1.75	44.445	2.5	0.44	0.8	3.56	1.6	40.64	4.9	21.8	0.035	0.89	SPR	Z	MH
0.312	7.925	5045	1.75	44.445	4.1	0.72	1	4.45	1.3	33.02	6.3	28.02	0.038	0.97	SPR	Z	MH
0.312	7.925	S-554	1.75	44.445	5.2	0.91	1	4.45	1.2	30.48	7.6	33.8	0.041	1.04	SST	N	MH
0.312	7.925	5478	1.77	44.958	4.2	0.74	1	4.45	1.2	30.48	5.8	25.8	0.037	0.94	SPR	Z	MH
0.312	7.925	ZZ2-59	1.81	45.974	0.91	0.16	0.3	1.33	3.5	88.9	3.5	15.57	0.028	0.71	MW	Z	MH
0.312	7.925	ZZ1-62	1.84	46.736	0.43	0.08	0.2	0.89	5.4	137.16	2.5	11.12	0.025	0.64	MW	Z	MH
0.312	7.925	184-B	1.88	47.752	0.04	0.01	0.03	0.13	17	431.8	0.69	3.07	0.016	0.41	MW	Z	MH
0.312	7.925	176-B	1.88	47.752	0.13	0.02	0.07	0.31	10	254	1.4	6.23	0.02	0.51	MW	Z	FL
0.312	7.925	178-B	1.88	47.752	0.26	0.05	0.1	0.44	7.4	187.96	2	8.9	0.023	0.58	MW	Z	MH
0.312	7.925	177-B	1.88	47.752	0.4	0.07	0.2	0.89	5.7	144.78	2.5	11.12	0.025	0.64	MW	Z	FL
0.312	7.925	S-555	1.88	47.752	0.42	0.07	0.2	0.89	4.1	104.14	1.9	8.45	0.026	0.66	SST	N	MH
0.312	7.925	5466	1.88	47.752	5.1	0.89	1	4.45	1.1	27.94	6.9	30.69	0.039	0.99	SPR	Z	MH
0.312	7.925	5254	1.94	49.276	3	0.53	0.9	4	1.5	38.1	5.4	24.02	0.036	0.91	SPR	Z	MH
0.312	7.925	5202	2	50.8	0.8	0.14	0.3	1.33	4	101.6	3.5	15.57	0.028	0.71	MW	Z	MH




O.D. Inches	Century Stock Number	Length Inches	Rate Lbs./In.	Initial Tension Lbs.	Sugg Max. Defl. Inches	Sugg Max. load Lbs.	Wire Dia. Inches	Mat'l	F	E							
									mm	nds							
0.312	7.925	176-C	2.5	63.5	0.09	0.02	0.07	0.31	15	381	1.4	6.23	0.02	0.51	MW	Z	FL
0.312	7.925	178-C	2.5	63.5	0.18	0.03	0.1	0.44	10	254	2	8.9	0.023	0.58	MW	Z	MH
0.312	7.925	177-C	2.5	63.5	0.28	0.05	0.2	0.89	8.1	205.74	2.5	11.12	0.025	0.64	MW	Z	MH
0.312	7.925	5095	2.5	63.5	4.2	0.74	2	8.9	1.6	40.64	8.1	36.03	0.041	1.04	SPR	Z	MH
0.312	7.925	B3-20	2.5	63.5	6.4	1.12	2	8.9	1.3	33.02	11	48.93	0.045	1.14	HD	N	DL
0.312	7.925	S-560	2.63	66.802	0.85	0.15	0.5	2.22	3.7	93.98	3.6	16.01	0.032	0.81	SST	N	FL
0.312	7.925	5535	2.69	68.326	9.3	1.63	3	13.34	1.1	27.94	13	57.82	0.048	1.22	SPR	Z	MH
0.312	7.925	S-561	2.75	69.85	3	0.53	1	4.45	2	50.8	7.6	33.8	0.041	1.04	SST	N	MH
0.312	7.925	109	3	76.2	0.41	0.07	0.3	1.33	7.8	198.12	3.5	15.57	0.028	0.71	MW	Z	MH
0.312	7.925	5561	3	76.2	0.62	0.11	0.4	1.78	6.3	160.02	4.3	19.13	0.03	0.76	MW	Z	MH
0.312	7.925	5059	3	76.2	1.4	0.25	0.8	3.56	2.8	71.12	4.9	21.8	0.035	0.89	SPR	Z	SH
0.312	7.925	5526	3.25	82.55	3.1	0.54	2	8.9	2.1	53.34	8.1	36.03	0.041	1.04	SPR	Z	DL
0.312	7.925	376	3.38	85.852	1.2	0.21	0.8	3.56	4.9	124.46	6.6	29.36	0.035	0.89	MW	Z	MH
0.312	7.925	5301	3.63	92.202	7.5	1.31	3	13.34	1.4	35.56	13	57.82	0.048	1.22	SPR	Z	MH
0.312	7.925	12345	3.91	99.314	2	0.35	1	4.45	3	76.2	7.5	33.36	0.04	1.02	SPR	N	MH
0.312	7.925	104	4	101.6	2.4	0.42	2	8.9	2.8	71.12	8.1	36.03	0.041	1.04	HD	Z	MH
0.312	7.925	5622	4.44	112.776	0.9	0.16	0.8	3.56	4.6	116.84	4.9	21.8	0.035	0.89	SPR	Z	MH
0.312	7.925	314	5	127	0.48	0.08	0.5	2.22	9.8	248.92	5.2	23.13	0.032	0.81	MW	Z	MH
0.312	7.925	315	5	127	0.79	0.14	0.8	3.56	7.4	187.96	6.6	29.36	0.035	0.89	MW	Z	MH
0.312	7.925	646	6	152.4	0.23	0.04	0.3	1.33	15	381	3.9	17.35	0.029	0.74	MW	Z	MH
0.312	7.925	S-619	6.75	171.45	2.4	0.42	3	13.34	3.8	96.52	12	53.38	0.047	1.19	SST	N	FL
0.312	7.925	5537	6.88	174.752	1.3	0.23	2	8.9	4.9	124.46	8.1	36.03	0.041	1.04	SPR	Z	MH
0.312	7.925	5456	7	177.8	2.8	0.49	3	13.34	3.4	86.36	12	53.38	0.047	1.19	SPR	N	MH
0.312	7.925	5171	8	203.2	1.3	0.23	2	8.9	5.6	142.24	8.7	38.7	0.042	1.07	SPR	Z	MH
0.312	7.925	5467	8	203.2	2.4	0.42	3	13.34	4	101.6	12	53.38	0.047	1.19	SPR	N	SL
0.312	7.925	6103	16.1	408.94	1.1	0.19	2.85	12.68	8.7	220.98	9.6	42.7	0.047	1.19	HD	Z	FL
0.328	8.331	437	0.97	24.638	7.8	1.37	1	4.45	0.64	16.256	6	26.69	0.038	0.97	SPR	Z	FL
0.328	8.331	5115	1	25.4	5.2	0.91	0.7	3.11	0.76	19.304	4.6	20.46	0.035	0.89	SPR	Z	FL
0.328	8.331	ZZ2-65	1.06	26.924	12	2.1	1	4.45	0.52	13.208	7.6	33.8	0.041	1.04	SPR	Z	MH
0.328	8.331	M-54	1.19	30.226	45	7.88	5	22.24	0.31	7.874	19	84.51	0.056	1.42	SPR	Z	MH
0.328	8.331	A12-20	1.2	30.48	88	15.4	9	40.03	0.22	5.588	28	124.54	0.063	1.6	SPR	Z	MH
0.328	8.331	A11-2	1.38	35.052	29	5.08	4	17.79	0.39	9.906	15	66.72	0.052	1.32	SPR	N	MH
0.328	8.331	557	1.38	35.052	47	8.23	6	26.69	0.43	10.922	26	115.65	0.064	1.63	PB	N	MH
0.328	8.331	575	1.69	42.926	2.3	0.4	0.6	2.67	1.7	43.18	4.4	19.57	0.034	0.86	SPR	Z	SH
0.328	8.331	N-114	1.75	44.45	18	3.15	4	17.79	0.62	15.748	15	66.72	0.052	1.32	SPR	Z	MH
0.328	8.331	M-64	2	50.8	16	2.8	4	17.79	0.72	18.288	15	66.72	0.052	1.32	SPR	Z	MH
0.328	8.331	5207	2	50.8	21	3.68	4	17.79	0.61	15.494	17	75.62	0.054	1.37	SPR	Z	MH
0.328	8.331	442	2.22	56.388	0.52	0.09	0.3	1.33	5.9	149.86	3.3	14.68	0.028	0.71	MW	Z	FL
0.328	8.331	5063	2.63	66.802	1.4	0.25	0.7	3.11	2.9	73.66	4.6	20.46	0.035	0.89	SPR	Z	MH
0.328	8.331	5033	2.75	69.85	1.1	0.19	0.6	2.67	3.5	88.9	4.4	19.57	0.034	0.86	SPR	Z	MH
0.328	8.331	5210	3.88	98.552	2.4	0.42	1	4.45	2.8	71.12	8.2	36.47	0.042	1.07	SPR	Z	MH
0.328	8.331	5087	5	127	1.6	0.28	1	4.45	4	101.6	7.6	33.8	0.041	1.04	SPR	Z	SL
0.328	8.331	5594	5.88	149.352	1.5	0.26	1	4.45	4.6	116.84	8.2	36.47	0.042	1.07	SPR	Z	MH
0.328	8.331	5813	6.5	165.1	0.43	0.08	0.6	2.67	13	330.2	6	26.69	0.034	0.86	MW	Z	MH
0.328	8.331	5521	8	203.2	1.1	0.19	1	4.45	6.2	157.48	8.2	36.47	0.042	1.07	SPR	Z	MH
0.343	8.712	5452	0.81	20.574	1.6	0.28	0.2	0.89	1.7	43.18	2.8	12.45	0.027	0.69	MW	N	MH
0.343	8.712	5366	0.88	22.352	23	4.03	1	4.45	0.3	7.62	8.4	37.36	0.043	1.09	SPR	Z	MH
0.343	8.712	412	0.97	24.638	27	4.73	2	8.9	0.33	8.382	11	48.93	0.047	1.19	HD	Z	FL
0.343	8.712	5289	1	25.4	2.1	0.37	0.3	1.33	1.7	43.18	3.9	17.35	0.03	0.76	MW	Z	MH
0.343	8.712	5492	1.38	35.052	0.32	0.06	0.09	0.4	4.8	121.92	1.6	7.12	0.022	0.56	MW	GI	FL
0.343	8.712	5075	1.41	35.814	19	3.33	3	13.34	0.52	13.208	13	57.82	0.05	1.27	SPR	Z	MH
0.343	8.712	5683	1.44	36.576	16	2.8	2	8.9	0.61	15.494	12	53.38	0.048	1.22	SPR	Z	MH
0.343	8.712	179-A	1.5	38.1	0.4	0.07	0.2	0.89	5.2	132.08	2.3	10.23	0.025	0.64	MW	Z	MH
0.343	8.712	180-A	1.5	38.1	0.81	0.14	0.2	0.89	3.6	91.44	3.2	14.23	0.028	0.71	MW	Z	MH
0.343	8.712	5091	1.5	38.1	4	0.7	0.8	3.56	1.1	27.94	5.2	23.13	0.037	0.94	SPR	Z	MH
0.343	8.712	179-B	1.88	47.752	0.31	0.05	0.2	0.89	6.8	172.72	2.3	10.23	0.025	0.64	MW	Z	FL
0.343	8.712	180-B	1.88	47.752	0.59	0.1	0.2	0.89	5	127	3.2	14.23	0.028	0.71	MW	Z	MH
0.343	8.712	179-C	2.5	63.5	0.21	0.04	0.2	0.89	9.8	248.92	2.3	10.23	0.025	0.64	MW	Z	MH
0.343	8.712	180-C	2.5	63.5	0.4	0.07	0.2	0.89	7.3	185.42	3.2	14.23	0.028	0.71	MW	Z	FL
0.343	8.712	5125	2.5	63.5	4.3	0.75	2	8.9	1.7	43.18	9	40.03	0.044	1.12	SPR	Z	FL
0.343	8.712	303	2.75	69.85	0.32	0.06	0.2	0.89	5.291	134.38	0.22	0.98	0.031	0.79	SPR	N	MH
0.343	8.712	307	4.5	114.3	0.11	0.02	0.2	0.89	20	508	2.3	10.23	0.025	0.64	MW	Z	FL
0.343	8.712	5278	5.63	143.002	7.7	1.35	4	17.79	1.6	40.64	16	71.17	0.054	1.37	SPR	Z	EH
0.343	8.712	5525	17.6	447.04	0.08	0.01	0.4	1.78	48	1219.2	4.3	19.13	0.031	0.79	MW	Z	MH
0.359	9.119	A10-1	0.69	17.526	0.96	0.17	0.1	0.44	2	50.8	2	8.9	0.024	0.61	MW	N	FL
0.359	9.119	80472	0.75	19.05	30	5.25	0.6	2.67	0.2	5.08	6.6	29.36	0.037	0.94	MW	N	FL
0.359	9.119	80472S	0.75	19.05	25	4.38	0.5	2.22	0.16	4.064	4.5	20.02	0.037	0.94	SST	N	FL
0.359	9.119	80															

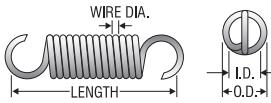


Century Spring

Extension Springs

O.D. Inches	Century Stock Number	Length Inches	Rate Lbs./In.	Initial Tension Lbs.	Sugg Max. Defl. Inches	Sugg Max. load Lbs.	Wire Dia.		Mat'l	F nsh s							
							Inches	mm									
0.359	9.119	80446	1	25.4	3.2	0.56	0.3	1.33	1.2	30.48	4.1	18.24	0.031	0.79	MW	N	FL
0.359	9.119	80446S	1	25.4	2.7	0.47	0.3	1.33	0.94	23.876	2.8	12.45	0.031	0.79	SST	N	FL
0.359	9.119	5977	1	25.4	1.7	0.3	0.3	1.33	1.5	38.1	2.8	12.45	0.031	0.79	SST	N	FL
0.359	9.119	80457	1	25.4	5.3	0.93	0.5	2.22	0.93	23.622	5.4	24.02	0.034	0.86	MW	N	FL
0.359	9.119	80457S	1	25.4	4.5	0.79	0.4	1.78	0.72	18.288	3.7	16.46	0.034	0.86	SST	N	FL
0.359	9.119	80473	1	25.4	7.8	1.37	0.6	2.67	0.77	19.558	6.6	29.36	0.037	0.94	MW	N	FL
0.359	9.119	80473S	1	25.4	6.6	1.16	0.5	2.22	0.61	15.494	4.5	20.02	0.037	0.94	SST	N	FL
0.359	9.119	5981	1	25.4	4.4	0.77	0.7	3.11	0.92	23.368	4.7	20.91	0.037	0.94	SST	N	FL
0.359	9.119	80488	1	25.4	11	1.93	0.7	3.11	0.66	16.764	7.7	34.25	0.039	0.99	MW	N	FL
0.359	9.119	80488S	1	25.4	9	1.58	0.6	2.67	0.52	13.208	5.3	23.57	0.039	0.99	SST	N	FL
0.359	9.119	80500	1	25.4	13	2.28	0.8	3.56	0.63	16.002	8.9	39.59	0.041	1.04	MW	N	FL
0.359	9.119	80500S	1	25.4	11	1.93	1.3	5.78	0.5	12.7	6.1	27.13	0.041	1.04	SST	N	FL
0.359	9.119	5985	1	25.4	7.5	1.31	1	4.45	0.72	18.288	6.5	28.91	0.041	1.04	SST	N	FL
0.359	9.119	80516	1	25.4	21	3.68	1	4.45	0.51	12.954	12	53.38	0.045	1.14	MW	N	FL
0.359	9.119	80516S	1	25.4	18	3.15	0.9	4	0.4	10.16	8	35.58	0.045	1.14	SST	N	FL
0.359	9.119	5992	1	25.4	12	2.1	2	8.9	0.58	14.732	8.7	38.7	0.045	1.14	SST	N	FL
0.359	9.119	80533	1	25.4	33	5.78	1	4.45	0.41	10.414	15	66.72	0.049	1.24	MW	N	FL
0.359	9.119	80533S	1	25.4	28	4.9	1	4.45	0.33	8.382	10	44.48	0.049	1.24	SST	N	FL
0.359	9.119	80550	1	25.4	41	7.18	2	8.9	0.37	9.398	17	75.62	0.052	1.32	MW	N	FL
0.359	9.119	80550S	1	25.4	35	6.13	1	4.45	0.29	7.366	11	48.93	0.052	1.32	SST	N	FL
0.359	9.119	80561	1	25.4	60	10.5	2	8.9	0.29	7.366	19	84.51	0.055	1.4	MW	N	FL
0.359	9.119	80561S	1	25.4	51	8.93	2	8.9	0.23	5.842	13	57.82	0.055	1.4	SST	N	FL
0.359	9.119	80578	1	25.4	78	13.65	2	8.9	0.26	6.604	23	102.3	0.058	1.47	MW	N	FL
0.359	9.119	80578S	1	25.4	66	11.55	2	8.9	0.21	5.334	15	66.72	0.058	1.47	SST	N	FL
0.359	9.119	B18-175	1.03	26.162	13	2.28	2	8.9	0.57	14.478	9.2	40.92	0.045	1.14	SPR	GI	FL
0.359	9.119	80438	1.13	28.702	1	0.18	0.2	0.89	2.2	55.88	2.5	11.12	0.026	0.66	MW	N	FL
0.359	9.119	80438S	1.13	28.702	0.86	0.15	0.2	0.89	1.8	45.72	1.7	7.56	0.026	0.66	SST	N	FL
0.359	9.119	M-83	1.13	28.702	2	0.35	0.3	1.33	1.7	43.18	3.7	16.46	0.03	0.76	MW	N	FL
0.359	9.119	80447	1.13	28.702	2.4	0.42	0.3	1.33	1.6	40.64	4.1	18.24	0.031	0.79	MW	N	FL
0.359	9.119	80447S	1.13	28.702	2	0.35	0.3	1.33	1.3	33.02	2.8	12.45	0.031	0.79	SST	N	FL
0.359	9.119	80458	1.13	28.702	3.9	0.68	0.5	2.22	1.3	33.02	5.4	24.02	0.034	0.86	MW	N	FL
0.359	9.119	80458S	1.13	28.702	3.3	0.58	0.4	1.78	0.98	24.892	3.7	16.46	0.034	0.86	SST	N	FL
0.359	9.119	80474	1.13	28.702	5.8	1.02	0.6	2.67	1	25.4	6.6	29.36	0.037	0.94	MW	N	FL
0.359	9.119	80474S	1.13	28.702	4.9	0.86	0.5	2.22	0.82	20.828	4.5	20.02	0.037	0.94	SST	N	FL
0.359	9.119	80489	1.13	28.702	7.8	1.37	0.7	3.11	0.9	22.86	7.7	34.25	0.039	0.99	MW	N	FL
0.359	9.119	80489S	1.13	28.702	6.6	1.16	0.6	2.67	0.71	18.034	5.3	23.57	0.039	0.99	SST	N	FL
0.359	9.119	5785	1.13	28.702	8.7	1.52	1	4.45	0.62	15.748	6.4	28.47	0.04	1.02	SPR	Z	MH
0.359	9.119	80501	1.13	28.702	9.7	1.7	1.3	5.78	0.84	21.336	8.9	39.59	0.041	1.04	MW	N	FL
0.359	9.119	80501S	1.13	28.702	8.2	1.44	0.7	3.11	0.66	16.764	6.1	27.13	0.041	1.04	SST	N	FL
0.359	9.119	5856	1.13	28.702	7	1.23	1	4.45	0.82	20.828	6.9	30.69	0.041	1.04	SPR	Z	FL
0.359	9.119	80517	1.13	28.702	16	2.8	1	4.45	0.66	16.764	12	53.38	0.045	1.14	MW	N	FL
0.359	9.119	80517S	1.13	28.702	14	2.45	0.9	4	0.52	13.208	8	35.58	0.045	1.14	SST	N	FL
0.359	9.119	80534	1.13	28.702	26	4.55	1	4.45	0.53	13.462	15	66.72	0.049	1.24	MW	N	FL
0.359	9.119	80551	1.13	28.702	31	5.43	2	8.9	0.48	12.192	17	75.62	0.052	1.32	MW	N	FL
0.359	9.119	80551S	1.13	28.702	26	4.55	1	4.45	0.38	9.652	11	48.93	0.052	1.32	SST	N	FL
0.359	9.119	80562	1.13	28.702	46	8.05	2	8.9	0.38	9.652	19	84.51	0.055	1.4	MW	N	FL
0.359	9.119	80562S	1.13	28.702	39	6.83	1	4.45	0.3	7.62	13	57.82	0.055	1.4	SST	N	FL
0.359	9.119	5999	1.13	28.702	30	5.25	4	17.79	0.38	9.652	15	66.72	0.055	1.4	SST	N	FL
0.359	9.119	80579	1.13	28.702	61	10.68	2	8.9	0.34	8.636	23	102.3	0.058	1.47	MW	N	FL
0.359	9.119	80579S	1.13	28.702	52	9.1	2	8.9	0.26	6.604	15	66.72	0.058	1.47	SST	N	FL
0.359	9.119	5280	1.16	29.464	41	7.18	4	17.79	0.28	7.112	15	66.72	0.054	1.37	SPR	N	MH
0.359	9.119	561	1.22	30.988	1.3	0.23	0.3	1.33	2.7	68.58	3.7	16.46	0.03	0.76	MW	Z	MH
0.359	9.119	80439	1.25	31.75	0.76	0.13	0.2	0.89	3	76.2	2.5	11.12	0.026	0.66	MW	N	FL
0.359	9.119	80439S	1.25	31.75	0.65	0.11	0.2	0.89	2.3	58.42	1.7	7.56	0.026	0.66	SST	N	FL
0.359	9.119	80448	1.25	31.75	1.9	0.33	0.3	1.33	2.1	53.34	4.1	18.24	0.031	0.79	MW	N	FL
0.359	9.119	80448S	1.25	31.75	1.6	0.28	0.3	1.33	1.6	40.64	2.8	12.45	0.031	0.79	SST	N	FL
0.359	9.119	5978	1.25	31.75	1.2	0.21	0.3	1.33	2.1	53.34	2.8	12.45	0.031	0.79	SST	N	FL
0.359	9.119	80459	1.25	31.75	3.1	0.54	0.5	2.22	1.6	40.64	5.4	24.02	0.034	0.86	MW	N	FL
0.359	9.119	80459S	1.25	31.75	2.6	0.46	0.4	1.78	1.3	33.02	3.7	16.46	0.034	0.86	SST	N	FL
0.359	9.119	80475	1.25	31.75	4.6	0.81	0.6	2.67	1.3	33.02	6.6	29.36	0.037	0.94	MW	N	FL
0.359	9.119	80475S	1.25	31.75	3.9	0.68	0.5	2.22	1	25.4	4.5	20.02	0.037	0.94	SST	N	FL
0.359	9.119	5982	1.25	31.75	3.1	0.54	0.7	3.11	1.3	33.02	4.7	20.91	0.037	0.94	SST	N	FL
0.359	9.119	80490	1.25	31.75	6.2	1.09	0.7	3.11	1.1	27.94	7.7	34.25	0.039	0.99	MW	N	FL
0.359	9.119	80490S	1.25	31.75	5.2	0.91	0.6	2.67	0.9	22.86	5.3	23.57	0.039	0.99	SST	N	FL
0.359	9.119	5782	1.25	31.75	6.7	1.17	0.9	4	0.75	19.05	6	26.69	0.04	1.02	SST	N	MH
0.359	9.119	80502	1.25	31.75	7.9	1.38	0.8	3.56	1	25.4	8.9	39.59	0.041	1.04	MW	N	FL
0.359	9.119	80502S	1.25	31.75	6.7	1.17	0.7	3.11	0.81	20.574	6.1	27.13					




O.D. Inches mm	Century Stock Number	Length Inches mm	Rate Lbs./In. N/mm	Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm	Mat'l	F	E							
									Finish	Ends							
0.359	9.119	80580S	1.25	31.75	41	7.18	2	8.9	0.33	8.382	15	66.72	0.058	1.47	SST	N	FL
0.359	9.119	B5-32	1.28	32.512	9.6	1.68	2	8.9	0.79	20.066	9.2	40.92	0.045	1.14	SPR	N	MH
0.359	9.119	ZZ2-43	1.28	32.512	22	3.85	3	13.34	0.46	11.684	13	57.82	0.051	1.3	SPR	Z	FL
0.359	9.119	80440	1.38	35.052	0.65	0.11	0.2	0.89	3.5	88.9	2.5	11.12	0.026	0.66	MW	N	FL
0.359	9.119	80440S	1.38	35.052	0.55	0.1	0.2	0.89	2.7	68.58	1.7	7.56	0.026	0.66	SST	N	FL
0.359	9.119	B1-49	1.38	35.052	1.4	0.25	0.3	1.33	2.5	63.5	3.7	16.46	0.03	0.76	MW	N	MH
0.359	9.119	80449	1.38	35.052	1.6	0.28	0.3	1.33	2.5	63.5	4.1	18.24	0.031	0.79	MW	N	FL
0.359	9.119	80449S	1.38	35.052	1.3	0.23	0.3	1.33	1.9	48.26	2.8	12.45	0.031	0.79	SST	N	FL
0.359	9.119	5852	1.38	35.052	1.2	0.21	0.3	1.33	3.2	81.28	4.1	18.24	0.031	0.79	MW	Z	FL
0.359	9.119	5979	1.38	35.052	1.1	0.19	0.3	1.33	2.4	60.96	2.8	12.45	0.031	0.79	SST	N	FL
0.359	9.119	80460	1.38	35.052	2.6	0.46	0.5	2.22	1.9	48.26	5.4	24.02	0.034	0.86	MW	N	FL
0.359	9.119	80460S	1.38	35.052	2.2	0.39	0.4	1.78	1.5	38.1	3.7	16.46	0.034	0.86	SST	N	FL
0.359	9.119	80476	1.38	35.052	3.9	0.68	0.6	2.67	1.6	40.64	6.6	29.36	0.037	0.94	MW	N	FL
0.359	9.119	80476S	1.38	35.052	3.3	0.58	0.5	2.22	1.2	30.48	4.5	20.02	0.037	0.94	SST	N	FL
0.359	9.119	5854	1.38	35.052	3	0.53	0.7	3.11	1.4	35.56	5	22.24	0.037	0.94	SPR	Z	FL
0.359	9.119	80491	1.38	35.052	5.2	0.91	0.7	3.11	1.4	35.56	7.7	34.25	0.039	0.99	MW	N	FL
0.359	9.119	80491S	1.38	35.052	4.4	0.77	0.6	2.67	1.1	27.94	5.3	23.57	0.039	0.99	SST	N	FL
0.359	9.119	80503	1.38	35.052	6.6	1.16	0.8	3.56	1.2	30.48	8.9	39.59	0.041	1.04	MW	N	FL
0.359	9.119	80503S	1.38	35.052	5.6	0.98	0.7	3.11	0.97	24.638	6.1	27.13	0.041	1.04	SST	N	FL
0.359	9.119	5857	1.38	35.052	5.3	0.93	1	4.45	1.1	27.94	6.9	30.69	0.041	1.04	SPR	Z	FL
0.359	9.119	ZZ4-57	1.38	35.052	6.8	1.19	1.3	5.78	0.84	21.336	6.9	30.69	0.041	1.04	SPR	Z	MH
0.359	9.119	80519	1.38	35.052	11	1.93	1	4.45	1	25.4	12	53.38	0.045	1.14	MW	N	FL
0.359	9.119	80519S	1.38	35.052	9.1	1.59	0.9	4	0.79	20.066	8	35.58	0.045	1.14	SST	N	FL
0.359	9.119	80536	1.38	35.052	17	2.98	1	4.45	0.8	20.32	15	66.72	0.049	1.24	MW	N	FL
0.359	9.119	80536S	1.38	35.052	14	2.45	1	4.45	0.63	16.002	10	44.48	0.049	1.24	SST	N	FL
0.359	9.119	80553	1.38	35.052	22	3.85	2	8.9	0.68	17.272	17	75.62	0.052	1.32	MW	N	FL
0.359	9.119	80553S	1.38	35.052	18	3.15	1	4.45	0.54	13.716	11	48.93	0.052	1.32	SST	N	FL
0.359	9.119	80564	1.38	35.052	31	5.43	2	8.9	0.56	14.224	19	84.51	0.055	1.4	MW	N	FL
0.359	9.119	80564S	1.38	35.052	26	4.55	2	8.9	0.44	11.176	13	57.82	0.055	1.4	SST	N	FL
0.359	9.119	5230	1.38	35.052	28	4.9	4	17.79	0.43	10.922	16	71.17	0.055	1.4	SPR	Z	MH
0.359	9.119	80581	1.38	35.052	41	7.18	2	8.9	0.5	12.7	23	102.3	0.058	1.47	MW	N	FL
0.359	9.119	80581S	1.38	35.052	35	6.13	2	8.9	0.39	9.906	15	66.72	0.058	1.47	SST	N	FL
0.359	9.119	544	1.47	37.338	3.1	0.54	0.7	3.11	1.4	35.56	5	22.24	0.037	0.94	SPR	Z	MH
0.359	9.119	80441	1.5	38.1	0.55	0.1	0.2	0.89	4.1	104.14	2.5	11.12	0.026	0.66	MW	N	FL
0.359	9.119	80441S	1.5	38.1	0.47	0.08	0.2	0.89	3.2	81.28	1.7	7.56	0.026	0.66	SST	N	FL
0.359	9.119	80450	1.5	38.1	1.4	0.25	0.3	1.33	2.8	71.12	4.1	18.24	0.031	0.79	MW	N	FL
0.359	9.119	80450S	1.5	38.1	1.1	0.19	0.3	1.33	2.2	55.88	2.8	12.45	0.031	0.79	SST	N	FL
0.359	9.119	5853	1.5	38.1	1.1	0.19	0.3	1.33	3.6	91.44	4.1	18.24	0.031	0.79	MW	Z	FL
0.359	9.119	5980	1.5	38.1	0.94	0.16	0.3	1.33	2.7	68.58	2.8	12.45	0.031	0.79	SST	N	FL
0.359	9.119	80461	1.5	38.1	2.2	0.39	0.5	2.22	2.3	58.42	5.4	24.02	0.034	0.86	MW	N	FL
0.359	9.119	80461S	1.5	38.1	1.8	0.32	0.4	1.78	1.8	45.72	3.7	16.46	0.034	0.86	SST	N	FL
0.359	9.119	80477	1.5	38.1	3.3	0.58	0.6	2.67	1.8	45.72	6.6	29.36	0.037	0.94	MW	N	FL
0.359	9.119	80477S	1.5	38.1	2.8	0.49	0.5	2.22	1.4	35.56	4.5	20.02	0.037	0.94	SST	N	FL
0.359	9.119	80492	1.5	38.1	4.4	0.77	0.7	3.11	1.6	40.64	7.7	34.25	0.039	0.99	MW	N	FL
0.359	9.119	80492S	1.5	38.1	3.7	0.65	0.6	2.67	1.3	33.02	5.3	23.57	0.039	0.99	SST	N	FL
0.359	9.119	B1-28	1.5	38.1	3.8	0.67	0.8	3.56	1.2	30.48	5.5	24.46	0.039	0.99	SST	N	MH
0.359	9.119	80504	1.5	38.1	5.7	1	0.8	3.56	1.4	35.56	8.9	39.59	0.041	1.04	MW	N	FL
0.359	9.119	80504S	1.5	38.1	4.8	0.84	0.7	3.11	1.1	27.94	6.1	27.13	0.041	1.04	SST	N	FL
0.359	9.119	5987	1.5	38.1	4.1	0.72	1	4.45	1.3	33.02	6.5	28.91	0.041	1.04	SST	N	FL
0.359	9.119	ZZ4-35	1.5	38.1	5.6	0.98	1	4.45	1	25.4	6.9	30.69	0.041	1.04	SPR	N	MH
0.359	9.119	80520	1.5	38.1	9.2	1.61	1	4.45	1.2	30.48	12	53.38	0.045	1.14	MW	N	FL
0.359	9.119	80520S	1.5	38.1	7.8	1.37	0.9	4	0.91	23.114	8	35.58	0.045	1.14	SST	N	FL
0.359	9.119	5994	1.5	38.1	6.8	1.19	2	8.9	1	25.4	8.7	38.7	0.045	1.14	SST	N	FL
0.359	9.119	80537	1.5	38.1	15	2.63	1	4.45	0.93	23.622	15	66.72	0.049	1.24	MW	N	FL
0.359	9.119	80537S	1.5	38.1	12	2.1	1	4.45	0.73	18.542	10	44.48	0.049	1.24	SST	N	FL
0.359	9.119	80554	1.5	38.1	19	3.33	2	8.9	0.8	20.32	17	75.62	0.052	1.32	MW	N	FL
0.359	9.119	80554S	1.5	38.1	16	2.8	1	4.45	0.63	16.002	11	48.93	0.052	1.32	SST	N	FL
0.359	9.119	80565	1.5	38.1	27	4.73	2	8.9	0.65	16.51	19	84.51	0.055	1.4	MW	N	FL
0.359	9.119	80565S	1.5	38.1	23	4.03	2	8.9	0.51	12.954	13	57.82	0.055	1.4	SST	N	FL
0.359	9.119	5924	1.5	38.1	23	4.03	4	17.79	0.54	13.716	16	71.17	0.055	1.4	SPR	Z	FL
0.359	9.119	80582	1.5	38.1	36	6.3	2	8.9	0.57	14.478	23	102.3	0.058	1.47	MW	N	FL
0.359	9.119	80582S	1.5	38.1	30	5.25	2	8.9	0.45	11.43	15	66.72	0.058	1.47	SST	N	FL
0.359	9.119	5921	1.63	41.402	6.9	1.21	2	8.9	1.1	27.94	9.2	40.92	0.045	1.14	SPR	Z	FL
0.359	9.119	5862	1.63	41.402	21	3.68	4	17.79	0.6	15.24	16	71.17	0.055	1.4	SPR	Z	FL
0.359	9.119	80442	1.75	44.45	0.4	0.07	0.2	0.89	5.7	144.78	2.5	11.12	0.026	0.66	MW	N	FL
0.359	9.119	80442S	1.75	44.45	0.34	0.06	0.2	0.89	4.5	114.3	1.7	7.56	0.026	0.66	SST	N	FL
0.359	9.119	80451	1.75	44.45	1	0.18	0.3	1.33	3.7	93.98							

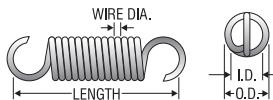


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length		Rate		Initial Tension Lbs. N/mm	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia.		Mat'l	F nsh Ends					
		Inches	mm	Lbs./In. mm	N/mm				Inches	mm							
0.359	9.119	80521S	1.75	44.45	6.4	1.12	0.9	4	1.1	27.94	8	35.58	0.045	1.14	SST	N	FL
0.359	9.119	5922	1.75	44.45	6.3	1.1	2	8.9	1.2	30.48	9.2	40.92	0.045	1.14	SPR	Z	FL
0.359	9.119	80538	1.75	44.45	11	1.93	1	4.45	1.2	30.48	15	66.72	0.049	1.24	MW	N	FL
0.359	9.119	80538S	1.75	44.45	9.7	1.7	1	4.45	0.94	23.876	10	44.48	0.049	1.24	SST	N	FL
0.359	9.119	80555	1.75	44.45	15	2.63	2	8.9	1	25.4	17	75.62	0.052	1.32	MW	N	FL
0.359	9.119	80555S	1.75	44.45	12	2.1	1	4.45	0.81	20.574	11	48.93	0.052	1.32	SST	N	FL
0.359	9.119	80566	1.75	44.45	21	3.68	2	8.9	0.83	21.082	19	84.51	0.055	1.4	MW	N	FL
0.359	9.119	6000	1.75	44.45	17	2.98	4	17.79	0.7	17.78	15	66.72	0.055	1.4	SST	N	FL
0.359	9.119	80583	1.75	44.45	28	4.9	2	8.9	0.73	18.542	23	102.3	0.058	1.47	MW	N	FL
0.359	9.119	80583S	1.75	44.45	24	4.2	2	8.9	0.58	14.732	15	66.72	0.058	1.47	SST	N	FL
0.359	9.119	6054	1.8	45.72	26	4.55	5	22.24	0.55	13.97	19	84.51	0.059	1.5	SST	N	MH
0.359	9.119	5916	1.88	47.752	2	0.35	0.7	3.11	2.1	53.34	5	22.24	0.037	0.94	SPR	Z	FL
0.359	9.119	5989	1.88	47.752	3.1	0.54	1	4.45	1.8	45.72	6.5	28.91	0.041	1.04	SST	N	FL
0.359	9.119	B5-34	1.88	47.752	4	0.7	1	4.45	1.6	40.64	7.4	32.92	0.042	1.07	SPR	GI	FL
0.359	9.119	5995	1.88	47.752	5.1	0.89	2	8.9	1.4	35.56	8.7	38.7	0.045	1.14	SST	N	FL
0.359	9.119	B1-66	1.97	50.038	2.4	0.42	0.8	3.56	1.9	48.26	5.4	24.02	0.038	0.97	SPR	GI	FL
0.359	9.119	5863	1.97	50.038	16	2.8	4	17.79	0.76	19.304	16	71.17	0.055	1.4	SPR	Z	FL
0.359	9.119	80443	2	50.8	0.3	0.05	0.1	0.44	7.5	190.5	2.4	10.68	0.026	0.66	MW	N	FL
0.359	9.119	80443S	2	50.8	0.26	0.05	0.09	0.4	5.9	149.86	1.6	7.12	0.026	0.66	SST	N	FL
0.359	9.119	80452	2	50.8	0.84	0.15	0.3	1.33	4.5	114.3	4.1	18.24	0.031	0.79	MW	N	FL
0.359	9.119	80452S	2	50.8	0.71	0.12	0.3	1.33	3.5	88.9	2.8	12.45	0.031	0.79	SST	N	FL
0.359	9.119	80463	2	50.8	1.4	0.25	0.5	2.22	3.6	91.44	5.4	24.02	0.034	0.86	MW	N	FL
0.359	9.119	80463S	2	50.8	1.1	0.19	0.4	1.78	2.8	71.12	3.7	16.46	0.034	0.86	SST	N	FL
0.359	9.119	80479	2	50.8	2.1	0.37	0.6	2.67	2.9	73.66	6.6	29.36	0.037	0.94	MW	N	FL
0.359	9.119	80479S	2	50.8	1.8	0.32	0.5	2.22	2.2	55.88	4.5	20.02	0.037	0.94	SST	N	FL
0.359	9.119	5855	2	50.8	1.9	0.33	0.7	3.11	2.3	58.42	5	22.24	0.037	0.94	SPR	Z	FL
0.359	9.119	80494	2	50.8	2.8	0.49	0.7	3.11	2.5	63.5	7.7	34.25	0.039	0.99	MW	N	FL
0.359	9.119	80494S	2	50.8	2.3	0.4	0.6	2.67	2	50.8	5.3	23.57	0.039	0.99	SST	N	FL
0.359	9.119	80506	2	50.8	3.6	0.63	0.8	3.56	2.3	58.42	8.9	39.59	0.041	1.04	MW	N	FL
0.359	9.119	80506S	2	50.8	3.1	0.54	0.7	3.11	1.8	45.72	6.1	27.13	0.041	1.04	SST	N	FL
0.359	9.119	5990	2	50.8	2.9	0.51	1	4.45	1.9	48.26	6.5	28.91	0.041	1.04	SST	N	FL
0.359	9.119	80522	2	50.8	5.9	1.03	1	4.45	1.8	45.72	12	53.38	0.045	1.14	MW	N	FL
0.359	9.119	80522S	2	50.8	5	0.88	0.9	4	1.4	35.56	8	35.58	0.045	1.14	SST	N	FL
0.359	9.119	5996	2	50.8	4.7	0.82	2	8.9	1.5	38.1	8.7	38.7	0.045	1.14	SST	N	FL
0.359	9.119	80539	2	50.8	9.4	1.65	1	4.45	1.5	38.1	15	66.72	0.049	1.24	MW	N	FL
0.359	9.119	80539S	2	50.8	8	1.4	1	4.45	1.1	27.94	10	44.48	0.049	1.24	SST	N	FL
0.359	9.119	80556	2	50.8	13	2.28	2	8.9	1.1	27.94	17	75.62	0.052	1.32	MW	N	FL
0.359	9.119	80556S	2	50.8	11	1.93	1	4.45	0.89	22.606	11	48.93	0.052	1.32	SST	N	FL
0.359	9.119	80567	2	50.8	17	2.98	2	8.9	1	25.4	19	84.51	0.055	1.4	MW	N	FL
0.359	9.119	80567S	2	50.8	15	2.63	2	8.9	0.79	20.066	13	57.82	0.055	1.4	SST	N	FL
0.359	9.119	5925	2	50.8	16	2.8	4	17.79	0.78	19.812	16	71.17	0.055	1.4	SPR	GI	FL
0.359	9.119	6001	2	50.8	14	2.45	4	17.79	0.83	21.082	15	66.72	0.055	1.4	SST	N	FL
0.359	9.119	B1-50	2	50.8	21	3.68	5	22.24	0.66	16.764	18	80.06	0.057	1.45	SPR	GI	FL
0.359	9.119	80584	2	50.8	23	4.03	2	8.9	0.88	22.352	23	102.3	0.058	1.47	MW	N	FL
0.359	9.119	80584S	2	50.8	20	3.5	2	8.9	0.69	17.526	15	66.72	0.058	1.47	SST	N	FL
0.359	9.119	B5-31	2.03	51.562	2.8	0.49	1	4.45	1.9	48.26	6.4	28.47	0.04	1.02	SPR	GI	MH
0.359	9.119	5858	2.13	54.102	4.9	0.86	2	8.9	1.5	38.1	9.2	40.92	0.045	1.14	SPR	Z	FL
0.359	9.119	489	2.2	55.88	4.5	0.79	2	8.9	1.7	43.18	9.2	40.92	0.045	1.14	SPR	Z	MH
0.359	9.119	80453	2.25	57.15	0.68	0.12	0.3	1.33	5.6	142.24	4.1	18.24	0.031	0.79	MW	N	FL
0.359	9.119	80453S	2.25	57.15	0.58	0.1	0.3	1.33	4.4	111.76	2.8	12.45	0.031	0.79	SST	N	FL
0.359	9.119	80464	2.25	57.15	1.2	0.21	0.4	1.78	4.1	104.14	5.4	24.02	0.034	0.86	MW	N	FL
0.359	9.119	80464S	2.25	57.15	1	0.18	0.4	1.78	3.2	81.28	3.6	16.01	0.034	0.86	SST	N	FL
0.359	9.119	80480	2.25	57.15	1.8	0.32	0.6	2.67	3.4	86.36	6.6	29.36	0.037	0.94	MW	N	FL
0.359	9.119	5983	2.25	57.15	1.4	0.25	0.7	3.11	2.8	71.12	4.7	20.91	0.037	0.94	SST	N	FL
0.359	9.119	B7-59	2.25	57.15	1.9	0.33	0.8	3.56	2.5	63.5	5.4	24.02	0.038	0.97	SPR	Z	FL
0.359	9.119	80495	2.25	57.15	2.4	0.42	0.7	3.11	3	76.2	7.7	34.25	0.039	0.99	MW	N	FL
0.359	9.119	80495S	2.25	57.15	2	0.35	0.6	2.67	2.3	58.42	5.3	23.57	0.039	0.99	SST	N	FL
0.359	9.119	80507	2.25	57.15	3.1	0.54	0.8	3.56	2.7	68.58	8.9	39.59	0.041	1.04	MW	N	FL
0.359	9.119	80507S	2.25	57.15	2.6	0.46	0.7	3.11	2.1	53.34	6.1	27.13	0.041	1.04	SST	N	FL
0.359	9.119	5991	2.25	57.15	2.5	0.44	1	4.45	2.2	55.88	6.5	28.91	0.041	1.04	SST	N	FL
0.359	9.119	80523	2.25	57.15	5.1	0.89	1	4.45	2.1	53.34	12	53.38	0.045	1.14	MW	N	FL
0.359	9.119	80523S	2.25	57.15	4.3	0.75	0.9	4	1.7	43.18	8	35.58	0.045	1.14	SST	N	FL
0.359	9.119	5923	2.25	57.15	4.6	0.81	2	8.9	1.6	40.64	9.2	40.92	0.045	1.14	SPR	Z	FL
0.359	9.119	80540	2.25	57.15	7.9	1.38	1	4.45	1.7	43.18	15	66.72	0.049	1.24	MW	N	FL
0.359	9.119	80540S	2.25	57.15	6.7	1.17	1	4.45	1.4	35.56	10	44.48	0.049	1.24	SST	N	FL
0.359	9.119	80557	2.25	57.15	10	1.75	2	8.9	1.5	38.1	17	75.62	0.052	1.32	MW	N	FL
0.359	9.119	80557S	2.25	57.15	8.7	1.52	1	4.45	1.1	27.94	11	48.93	0.052	1.32	SST	N	FL
0.359	9.119	805															




O.D. Inches	Century Stock Number	Length Inches	Rate Lbs./In.	Initial Tension Lbs.	Sugg Max. Defl. Inches	Sugg Max. load Lbs.	Wire Dia. Inches	Mat'l	F	E							
									mm	nds							
0.359	9.119	80481S	2.5	63.5	1.3	0.23	0.5	2.22	3.1	78.74	4.5	20.02	0.037	0.94	SST	N	FL
0.359	9.119	472	2.5	63.5	1.5	0.26	0.7	3.11	2.8	71.12	5	22.24	0.037	0.94	SPR	Z	FL
0.359	9.119	5917	2.5	63.5	1.6	0.28	0.8	3.56	2.8	71.12	5.4	24.02	0.038	0.97	SPR	Z	FL
0.359	9.119	80496	2.5	63.5	2	0.35	0.7	3.11	3.5	88.9	7.7	34.25	0.039	0.99	MW	N	FL
0.359	9.119	80496S	2.5	63.5	1.7	0.3	0.6	2.67	2.8	71.12	5.3	23.57	0.039	0.99	SST	N	FL
0.359	9.119	5778	2.5	63.5	2.2	0.39	0.9	4	2.3	58.42	6	26.69	0.04	1.02	SST	N	FL
0.359	9.119	80508	2.5	63.5	2.6	0.46	0.8	3.56	3.1	78.74	8.9	39.59	0.041	1.04	MW	N	FL
0.359	9.119	80508S	2.5	63.5	2.2	0.39	0.7	3.11	2.5	63.5	6.1	27.13	0.041	1.04	SST	N	FL
0.359	9.119	5920	2.5	63.5	2.5	0.44	1	4.45	2.3	58.42	6.9	30.69	0.041	1.04	SPR	Z	FL
0.359	9.119	577	2.5	63.5	4.1	0.72	1	4.45	1.7	43.18	8.6	38.25	0.044	1.12	SPR	Z	FL
0.359	9.119	80524	2.5	63.5	4.4	0.77	1	4.45	2.4	60.96	12	53.38	0.045	1.14	MW	N	FL
0.359	9.119	80524S	2.5	63.5	3.7	0.65	0.9	4	1.9	48.26	8	35.58	0.045	1.14	SST	N	FL
0.359	9.119	5334	2.5	63.5	4.5	0.79	2	8.9	1.7	43.18	9.2	40.92	0.045	1.14	SPR	Z	MH
0.359	9.119	5997	2.5	63.5	3.6	0.63	2	8.9	2	50.8	8.7	38.7	0.045	1.14	SST	N	FL
0.359	9.119	80541	2.5	63.5	6.8	1.19	1	4.45	2	50.8	15	66.72	0.049	1.24	MW	N	FL
0.359	9.119	80541S	2.5	63.5	5.8	1.02	1	4.45	1.6	40.64	10	44.48	0.049	1.24	SST	N	FL
0.359	9.119	80558	2.5	63.5	8.8	1.54	3.24	14.41	1.7	43.18	17	75.62	0.052	1.32	MW	N	FL
0.359	9.119	80558S	2.5	63.5	7.5	1.31	1	4.45	1.3	33.02	11	48.93	0.052	1.32	SST	N	FL
0.359	9.119	80569	2.5	63.5	13	2.28	2	8.9	1.4	35.56	19	84.51	0.055	1.4	MW	N	FL
0.359	9.119	80569S	2.5	63.5	11	1.93	2	8.9	1.1	27.94	13	57.82	0.055	1.4	SST	N	FL
0.359	9.119	6002	2.5	63.5	11	1.93	4	17.79	1.1	27.94	15	66.72	0.055	1.4	SST	N	FL
0.359	9.119	80586	2.5	63.5	17	2.98	2	8.9	1.2	30.48	23	102.3	0.058	1.47	MW	N	FL
0.359	9.119	80586S	2.5	63.5	14	2.45	2	8.9	0.95	24.13	15	66.72	0.058	1.47	SST	N	FL
0.359	9.119	560	2.63	66.802	5.2	0.91	2	8.9	1.7	43.18	11	48.93	0.047	1.19	SPR	Z	FL
0.359	9.119	80455	2.75	69.85	0.55	0.1	0.3	1.33	6.9	175.26	4.1	18.24	0.031	0.79	MW	N	FL
0.359	9.119	80455S	2.75	69.85	0.47	0.08	0.3	1.33	5.4	137.16	2.8	12.45	0.031	0.79	SST	N	FL
0.359	9.119	80466	2.75	69.85	0.9	0.16	0.4	1.78	5.5	139.7	5.4	24.02	0.034	0.86	MW	N	FL
0.359	9.119	80466S	2.75	69.85	0.77	0.13	0.4	1.78	4.3	109.22	3.6	16.01	0.034	0.86	SST	N	FL
0.359	9.119	80482	2.75	69.85	1.3	0.23	0.6	2.67	4.5	114.3	6.6	29.36	0.037	0.94	MW	N	FL
0.359	9.119	80482S	2.75	69.85	1.1	0.19	0.5	2.22	3.6	91.44	4.5	20.02	0.037	0.94	SST	N	FL
0.359	9.119	80497	2.75	69.85	1.8	0.32	0.7	3.11	3.9	99.06	7.7	34.25	0.039	0.99	MW	N	FL
0.359	9.119	80497S	2.75	69.85	1.5	0.26	0.6	2.67	3.1	78.74	5.3	23.57	0.039	0.99	SST	N	FL
0.359	9.119	80509	2.75	69.85	2.3	0.4	0.8	3.56	3.5	88.9	8.9	39.59	0.041	1.04	MW	N	FL
0.359	9.119	80509S	2.75	69.85	2	0.35	0.7	3.11	2.8	71.12	6.1	27.13	0.041	1.04	SST	N	FL
0.359	9.119	80525	2.75	69.85	3.9	0.68	1	4.45	2.8	71.12	12	53.38	0.045	1.14	MW	N	FL
0.359	9.119	80525S	2.75	69.85	3.3	0.58	0.9	4	2.2	55.88	8	35.58	0.045	1.14	SST	N	FL
0.359	9.119	5352	2.75	69.85	4.1	0.72	2	8.9	1.9	48.26	9.2	40.92	0.045	1.14	SPR	Z	MH
0.359	9.119	80542	2.75	69.85	6.1	1.07	1	4.45	2.2	55.88	15	66.72	0.049	1.24	MW	N	FL
0.359	9.119	80542S	2.75	69.85	5.2	0.91	1	4.45	1.8	45.72	10	44.48	0.049	1.24	SST	N	FL
0.359	9.119	80559	2.75	69.85	7.8	1.37	2	8.9	1.9	48.26	17	75.62	0.052	1.32	MW	N	FL
0.359	9.119	80559S	2.75	69.85	6.6	1.16	1	4.45	1.5	38.1	11	48.93	0.052	1.32	SST	N	FL
0.359	9.119	80570	2.75	69.85	11	1.93	2	8.9	1.5	38.1	19	84.51	0.055	1.4	MW	N	FL
0.359	9.119	80570S	2.75	69.85	9.6	1.68	2	8.9	1.2	30.48	13	57.82	0.055	1.4	SST	N	FL
0.359	9.119	5926	2.75	69.85	11	1.93	4	17.79	1.1	27.94	16	71.17	0.055	1.4	SPR	Z	FL
0.359	9.119	6003	2.75	69.85	9.6	1.68	4	17.79	1.2	30.48	15	66.72	0.055	1.4	SST	N	FL
0.359	9.119	80587	2.75	69.85	15	2.63	2	8.9	1.4	35.56	23	102.3	0.058	1.47	MW	N	FL
0.359	9.119	80587S	2.75	69.85	13	2.28	2	8.9	1.1	27.94	15	66.72	0.058	1.47	SST	N	FL
0.359	9.119	80456	3	76.2	0.48	0.08	0.3	1.33	8	203.2	4.1	18.24	0.031	0.79	MW	N	FL
0.359	9.119	80456S	3	76.2	0.4	0.07	0.3	1.33	6.3	160.02	2.8	12.45	0.031	0.79	SST	N	FL
0.359	9.119	80467	3	76.2	0.8	0.14	0.4	1.78	6.2	157.48	5.4	24.02	0.034	0.86	MW	N	FL
0.359	9.119	80467S	3	76.2	0.68	0.12	0.4	1.78	4.8	121.92	3.6	16.01	0.034	0.86	SST	N	FL
0.359	9.119	80483	3	76.2	1.2	0.21	0.6	2.67	4.9	124.46	6.6	29.36	0.037	0.94	MW	N	FL
0.359	9.119	80483S	3	76.2	1	0.18	0.5	2.22	3.9	99.06	4.5	20.02	0.037	0.94	SST	N	FL
0.359	9.119	80498	3	76.2	1.6	0.28	0.7	3.11	4.4	111.76	7.7	34.25	0.039	0.99	MW	N	FL
0.359	9.119	80498S	3	76.2	1.4	0.25	0.6	2.67	3.4	86.36	5.3	23.57	0.039	0.99	SST	N	FL
0.359	9.119	80510	3	76.2	2.1	0.37	0.8	3.56	3.9	99.06	8.9	39.59	0.041	1.04	MW	N	FL
0.359	9.119	80510S	3	76.2	1.8	0.32	0.7	3.11	3.1	78.74	6.1	27.13	0.041	1.04	SST	N	FL
0.359	9.119	80526	3	76.2	3.4	0.6	1	4.45	3.1	78.74	12	53.38	0.045	1.14	MW	N	FL
0.359	9.119	80526S	3	76.2	2.9	0.51	0.9	4	2.5	63.5	8	35.58	0.045	1.14	SST	N	FL
0.359	9.119	5998	3	76.2	2.9	0.51	2	8.9	2.5	63.5	8.7	38.7	0.045	1.14	SST	N	FL
0.359	9.119	80543	3	76.2	5.5	0.96	1	4.45	2.5	63.5	15	66.72	0.049	1.24	MW	N	FL
0.359	9.119	80543S	3	76.2	4.6	0.81	1	4.45	2	50.8	10	44.48	0.049	1.24	SST	N	FL
0.359	9.119	80560	3	76.2	7	1.23	2	8.9	2.1	53.34	17	75.62	0.052	1.32	MW	N	FL
0.359	9.119	80560S	3	76.2	6	1.05	1	4.45	1.7	43.18	11	48.93	0.052	1.32	SST	N	FL
0.359	9.119	80571	3	76.2	10	1.75	2	8.9	1.7	43.18	19	84.51	0.055	1.4	MW	N	FL
0.359	9.119	80571S	3	76.2	8.6	1.51	2	8.9	1.4	35.56	13	57.82	0.055	1.4	SST	N	FL
0.359	9.119	5864	3	76.2	9.8	1.72	4	17.79	1.3	33.02	16	71.17	0.055	1.4	SPR	Z	FL
0.359	9.119	6004	3	76.2	8.7	1.52	4	17.79	1.3	33.02	15	66.72	0.055</				

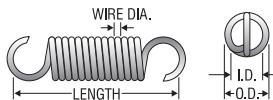


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm		Rate Lbs./In. N/mm		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm		Mat'l	F nsh s	E nds	
		Inches	mm	Lbs./In.	N/mm				Inches	mm				
0.359	9.119	80544S	3.5	88.9	3.8	0.67	1	4.45	2.4	60.96	10	44.48	0.049	1.24
0.359	9.119	80572	3.5	88.9	8.5	1.49	2	8.9	2.1	53.34	19	84.51	0.055	1.4
0.359	9.119	80572S	3.5	88.9	7.2	1.26	2	8.9	1.6	40.64	13	57.82	0.055	1.4
0.359	9.119	6005	3.5	88.9	7.3	1.28	4	17.79	1.6	40.64	15	66.72	0.055	1.4
0.359	9.119	80589	3.5	88.9	12	2.1	2	8.9	1.7	43.18	22	97.86	0.058	1.47
0.359	9.119	80589S	3.5	88.9	10	1.75	2	8.9	1.4	35.56	15	66.72	0.058	1.47
0.359	9.119	6006	3.75	95.25	6.8	1.19	4	17.79	1.7	43.18	15	66.72	0.055	1.4
0.359	9.119	80469	4	101.6	0.6	0.11	0.4	1.78	8.2	208.28	5.4	24.02	0.034	0.86
0.359	9.119	80469S	4	101.6	0.51	0.09	0.4	1.78	6.4	162.56	3.6	16.01	0.034	0.86
0.359	9.119	80485	4	101.6	0.9	0.16	0.5	2.22	6.7	170.18	6.5	28.91	0.037	0.94
0.359	9.119	80485S	4	101.6	0.77	0.13	0.4	1.78	5.2	132.08	4.4	19.57	0.037	0.94
0.359	9.119	80512	4	101.6	1.5	0.26	0.7	3.11	5.4	137.16	8.8	39.14	0.041	1.04
0.359	9.119	80512S	4	101.6	1.3	0.23	0.6	2.67	4.3	109.22	6	26.69	0.041	1.04
0.359	9.119	80528	4	101.6	2.4	0.42	1	4.45	4.5	114.3	12	53.38	0.045	1.14
0.359	9.119	80528S	4	101.6	2	0.35	0.9	4	3.5	88.9	8	35.58	0.045	1.14
0.359	9.119	80545	4	101.6	3.8	0.67	1	4.45	3.6	91.44	15	66.72	0.049	1.24
0.359	9.119	80545S	4	101.6	3.2	0.56	1	4.45	2.8	71.12	10	44.48	0.049	1.24
0.359	9.119	80573	4	101.6	7.3	1.28	2	8.9	2.4	60.96	19	84.51	0.055	1.4
0.359	9.119	80573S	4	101.6	6.2	1.09	2	8.9	1.9	48.26	13	57.82	0.055	1.4
0.359	9.119	6007	4	101.6	6.3	1.1	4	17.79	1.9	48.26	15	66.72	0.055	1.4
0.359	9.119	80590	4	101.6	10	1.75	2	8.9	2	50.8	22	97.86	0.058	1.47
0.359	9.119	80590S	4	101.6	8.6	1.51	2	8.9	1.6	40.64	15	66.72	0.058	1.47
0.359	9.119	5835	4.13	104.902	0.72	0.13	0.6	2.67	7.7	195.58	6.2	27.58	0.036	0.91
0.359	9.119	80470	4.5	114.3	0.5	0.09	0.4	1.78	9.8	248.92	5.4	24.02	0.034	0.86
0.359	9.119	80470S	4.5	114.3	0.43	0.08	0.4	1.78	7.7	195.58	3.6	16.01	0.034	0.86
0.359	9.119	80486	4.5	114.3	0.8	0.14	0.5	2.22	7.5	190.5	6.5	28.91	0.037	0.94
0.359	9.119	80486S	4.5	114.3	0.68	0.12	0.4	1.78	5.9	149.86	4.4	19.57	0.037	0.94
0.359	9.119	80513	4.5	114.3	1.3	0.23	0.7	3.11	6.2	157.48	8.8	39.14	0.041	1.04
0.359	9.119	80513S	4.5	114.3	1.1	0.19	0.6	2.67	4.9	124.46	6	26.69	0.041	1.04
0.359	9.119	80529	4.5	114.3	2.1	0.37	1	4.45	5.1	129.54	12	53.38	0.045	1.14
0.359	9.119	80529S	4.5	114.3	1.8	0.32	0.9	4	4	101.6	8	35.58	0.045	1.14
0.359	9.119	80546	4.5	114.3	3.4	0.6	1	4.45	4.1	104.14	15	66.72	0.049	1.24
0.359	9.119	80546S	4.5	114.3	2.8	0.49	1	4.45	3.2	81.28	10	44.48	0.049	1.24
0.359	9.119	80574	4.5	114.3	6.3	1.1	2	8.9	2.8	71.12	19	84.51	0.055	1.4
0.359	9.119	80574S	4.5	114.3	5.4	0.95	2	8.9	2.2	55.88	13	57.82	0.055	1.4
0.359	9.119	5865	4.5	114.3	5.5	0.96	4	17.79	2.1	53.34	15	66.72	0.055	1.4
0.359	9.119	5927	4.5	114.3	6.2	1.09	4	17.79	2	50.8	16	71.17	0.055	1.4
0.359	9.119	80591	4.5	114.3	8.7	1.52	2	8.9	2.3	58.42	22	97.86	0.058	1.47
0.359	9.119	80591S	4.5	114.3	7.4	1.3	2	8.9	1.8	45.72	15	66.72	0.058	1.47
0.359	9.119	80471	5	127	0.4	0.07	0.4	1.78	12	304.8	5.4	24.02	0.034	0.86
0.359	9.119	80471S	5	127	0.34	0.06	0.4	1.78	9.6	243.84	3.6	16.01	0.034	0.86
0.359	9.119	80487	5	127	0.7	0.12	0.5	2.22	8.6	218.44	6.5	28.91	0.037	0.94
0.359	9.119	80487S	5	127	0.6	0.11	0.4	1.78	6.7	170.18	4.4	19.57	0.037	0.94
0.359	9.119	80514	5	127	1.2	0.21	0.7	3.11	6.8	172.72	8.8	39.14	0.041	1.04
0.359	9.119	80514S	5	127	1	0.18	0.6	2.67	5.3	134.62	6	26.69	0.041	1.04
0.359	9.119	80530	5	127	1.9	0.33	0.9	4	5.6	142.24	12	53.38	0.045	1.14
0.359	9.119	80530S	5	127	1.6	0.28	0.8	3.56	4.4	111.76	7.9	35.14	0.045	1.14
0.359	9.119	80547	5	127	2.9	0.51	1	4.45	4.6	116.84	15	66.72	0.049	1.24
0.359	9.119	80547S	5	127	2.5	0.44	1	4.45	3.7	93.98	10	44.48	0.049	1.24
0.359	9.119	80575	5	127	5.6	0.98	2	8.9	3.1	78.74	19	84.51	0.055	1.4
0.359	9.119	80575S	5	127	4.7	0.82	2	8.9	2.5	63.35	13	57.82	0.055	1.4
0.359	9.119	80592	5	127	7.8	1.37	2	8.9	2.6	66.04	22	97.86	0.058	1.47
0.359	9.119	80592S	5	127	6.6	1.16	2	8.9	2.1	53.34	15	66.72	0.058	1.47
0.359	9.119	80531	5.5	139.7	1.7	0.3	0.9	4	6.3	160.02	12	53.38	0.045	1.14
0.359	9.119	80531S	5.5	139.7	1.4	0.25	0.8	3.56	4.9	124.46	7.9	35.14	0.045	1.14
0.359	9.119	80548	5.5	139.7	2.8	0.49	1	4.45	4.9	124.46	15	66.72	0.049	1.24
0.359	9.119	80548S	5.5	139.7	2.4	0.42	1	4.45	3.8	96.52	10	44.48	0.049	1.24
0.359	9.119	80576	5.5	139.7	4.9	0.86	2	8.9	3.5	88.9	19	84.51	0.055	1.4
0.359	9.119	80576S	5.5	139.7	4.2	0.74	2	8.9	2.8	71.12	13	57.82	0.055	1.4
0.359	9.119	80593	5.5	139.7	7	1.23	2	8.9	2.9	73.66	22	97.86	0.058	1.47
0.359	9.119	80593S	5.5	139.7	6	1.05	2	8.9	2.3	58.42	15	66.72	0.058	1.47
0.359	9.119	80532	6	152.4	1.6	0.28	0.9	4	6.6	167.64	12	53.38	0.045	1.14
0.359	9.119	80532S	6	152.4	1.4	0.25	0.8	3.56	5.2	132.08	7.9	35.14	0.045	1.14
0.359	9.119	80549	6	152.4	2.5	0.44	1	4.45	5.5	139.7	15	66.72	0.049	1.24
0.359	9.119	80549S	6	152.4	2.1	0.37	1	4.45	4.3	109.22	10	44.48	0.049	1.24
0.359	9.119	80577	6	152.4	4.5	0.79	2	8.9	3.9	99.06	19	84.51	0.055	1.4
0.359	9.119	80577S	6	152.4	3.8	0.67	2	8.9	3.1	78.74	13	57.82	0.055	1.4
0.359	9.119	80594	6	152.4	6.4	1.12	2	8.9	3.2	81.28	22	97.86	0.058	1.47
0.359	9.119	80594S	6	152.4	5.4	0.95	2	8.9	2.5	63.35	15	66.72	0.058	1.47
0.375	9.525	5236	0.81	20.574	22	3.85	2	8.9	0.39	9.906	11	48.93	0.048	1.22
0.375	9.525	ZZ1-33	0.84	21.336	4.3	0.75	0.4	1.78	0.73	18.542	3.5	15.57	0.033	0.84
0.375	9.525	5409	1	25.4	3.1	0.54	0.3	1.33	1.2	30.48	4	17.79	0.031	0.79
0.375	9.525	ZZ1-38	1	25.4	4.2	0.74	0.4	1.78	0.76	19.304	3.6	16.01	0.034	0.86
0.375	9.525	A15-55	1.13	28.702	8.4	1.47	1	4.45	0.66	16.764	6.5	28.91	0.041	1.04
0.375	9.525	5180	1.13	28.702	89	15.58	7	31.14	0.21	5.334	25	111.2	0.064	1.63
0.375	9.525	S-655	1.16	29.464	14	2.45	1	4.4						




O.D. Inches	Century Stock Number	Length Inches	Rate Lbs./In.	Initial Tension Lbs.	Sugg Max. Defl. Inches	Sugg Max. load Lbs.	Wire Dia. Inches	Mat'l	F	E							
									mm	nds							
0.375	9.525	5355	1.38	35.052	13	2.28	0.8	3.56	0.38	9.652	5.6	24.91	0.039	0.99	SPR	Z	EH
0.375	9.525	5224	1.38	35.052	12	2.1	2	8.9	0.71	18.034	10	44.48	0.047	1.19	SPR	Z	MH
0.375	9.525	ZZ3-34	1.38	35.052	19	3.33	3	13.34	0.52	13.208	12	53.38	0.051	1.3	SPR	Z	MH
0.375	9.525	S-642	1.38	35.052	19	3.33	3	13.34	0.56	14.224	14	62.27	0.054	1.37	SST	N	MH
0.375	9.525	12521	1.41	35.814	6.8	1.19	1	4.45	1	25.4	8.3	36.92	0.045	1.14	SST	N	MH
0.375	9.525	5197	1.47	37.338	2.1	0.37	0.5	2.22	1.7	43.18	4	17.79	0.035	0.89	SPR	Z	MH
0.375	9.525	S-562	1.5	38.1	0.98	0.17	0.3	1.33	2.7	68.58	3	13.34	0.032	0.81	SST	N	FL
0.375	9.525	N-140	1.5	38.1	3.8	0.67	0.8	3.56	1.3	33.02	5.6	24.91	0.039	0.99	SPR	Z	MH
0.375	9.525	562	1.5	38.1	4.8	0.84	1	4.45	1.2	30.48	6.5	28.91	0.041	1.04	SPR	Z	MH
0.375	9.525	5294	1.5	38.1	9.2	1.61	2	8.9	0.89	22.606	10	44.48	0.047	1.19	SPR	Z	FL
0.375	9.525	B3-30	1.5	38.1	20	3.5	4	17.79	0.59	14.986	15	66.72	0.055	1.4	SPR	Z	MH
0.375	9.525	117	1.5	38.1	43	7.53	6	26.69	0.39	9.906	23	102.3	0.062	1.57	HD	Z	MH
0.375	9.525	S-644	1.5	38.1	115	20.13	11	48.93	0.2	5.08	34	151.23	0.072	1.83	SST	N	EH
0.375	9.525	M-126	1.56	39.624	1.2	0.21	0.4	1.78	2.5	63.5	3.5	15.57	0.033	0.84	SPR	Z	FL
0.375	9.525	477	1.59	40.386	2.6	0.46	0.6	2.67	1.6	40.64	4.7	20.91	0.037	0.94	SPR	Z	MH
0.375	9.525	5611	1.63	41.402	1.7	0.3	0.5	2.22	2	50.8	4	17.79	0.035	0.89	SPR	Z	MH
0.375	9.525	5223	1.66	42.164	7.8	1.37	2	8.9	1.1	27.94	10	44.48	0.047	1.19	SPR	Z	MH
0.375	9.525	5219	1.69	42.926	1.7	0.3	0.5	2.22	2	50.8	3.9	17.35	0.036	0.91	SPR	Z	MH
0.375	9.525	6084	1.7	43.18	81.3	14.23	12	53.38	0.29	7.366	45	200.16	0.071	1.8	MW	Z	FL
0.375	9.525	5522	1.75	44.45	1.5	0.26	0.5	2.22	2.3	58.42	3.9	17.35	0.034	0.86	SPR	Z	MH
0.375	9.525	0-94	1.75	44.45	2.6	0.46	0.8	3.56	1.9	48.26	5.6	24.91	0.039	0.99	SPR	Z	MH
0.375	9.525	5041	1.75	44.45	9.4	1.65	2	8.9	0.88	22.352	10	44.48	0.047	1.19	SPR	Z	SH
0.375	9.525	5834	1.75	44.45	8.1	1.42	2	8.9	1.1	27.94	11	48.93	0.049	1.24	SST	N	MH
0.375	9.525	S-563	1.75	44.45	13	2.28	3	13.34	0.81	20.574	14	62.27	0.054	1.37	SST	N	MH
0.375	9.525	5515	1.75	44.45	21	3.68	4	17.79	0.61	15.494	17	75.62	0.057	1.45	SPR	Z	MH
0.375	9.525	5240	1.75	44.45	42	7.35	7	31.14	0.44	11.176	25	111.2	0.064	1.63	SPR	Z	MH
0.375	9.525	535	1.84	46.736	7.2	1.26	2	8.9	1.1	27.94	10	44.48	0.047	1.19	HD	Z	MH
0.375	9.525	S-564	1.88	47.752	3	0.53	0.9	4	1.7	43.18	6.2	27.58	0.041	1.04	SST	N	MH
0.375	9.525	5238	1.88	47.752	16	2.8	3	13.34	0.68	17.272	14	62.27	0.054	1.37	HD	Z	MH
0.375	9.525	5317	1.91	48.514	3.5	0.61	1	4.45	1.6	40.64	6.5	28.91	0.041	1.04	SPR	Z	MH
0.375	9.525	5627	1.94	49.276	0.46	0.08	0.2	0.89	5.9	149.86	2.9	12.9	0.028	0.71	MW	Z	FL
0.375	9.525	5222	1.94	49.276	8.2	1.44	2	8.9	1.1	27.94	11	48.93	0.048	1.22	SPR	Z	MH
0.375	9.525	S-612	1.97	50.038	4.2	0.74	1	4.45	1.6	40.64	8.3	36.92	0.045	1.14	SST	N	MH
0.375	9.525	217	2	50.8	0.39	0.07	0.2	0.89	7	177.8	2.9	12.9	0.028	0.71	MW	Z	MH
0.375	9.525	582	2	50.8	0.9	0.16	0.3	1.33	4.1	104.14	4	17.79	0.031	0.79	MW	Z	MH
0.375	9.525	S-565	2	50.8	0.68	0.12	0.3	1.33	3.9	99.06	3	13.34	0.032	0.81	SST	N	MH
0.375	9.525	5227	2	50.8	1.5	0.26	0.5	2.22	2.3	58.42	4	17.79	0.035	0.89	SPR	Z	MH
0.375	9.525	6049	2	50.8	2.9	0.51	0.7	3.11	2.1	53.34	6.9	30.69	0.038	0.97	MW	N	EH
0.375	9.525	563	2	50.8	3.1	0.54	1	4.45	1.8	45.72	6.5	28.91	0.041	1.04	SPR	Z	MH
0.375	9.525	ZZ4-62	2	50.8	2.3	0.4	0.9	4	2.3	58.42	6.2	27.58	0.041	1.04	SST	N	MH
0.375	9.525	488	2	50.8	19	3.33	4	17.79	0.73	18.542	18	80.06	0.058	1.47	SPR	Z	MH
0.375	9.525	5363	2.13	54.102	3	0.53	1	4.45	1.8	45.72	6.5	28.91	0.041	1.04	SPR	Z	SH
0.375	9.525	580	2.13	54.102	8.9	1.56	3	13.34	1.1	27.94	12	53.38	0.051	1.3	SPR	Z	MH
0.375	9.525	5221	2.16	54.864	1.4	0.25	0.6	2.67	2.7	68.58	4.3	19.13	0.036	0.91	SPR	Z	MH
0.375	9.525	S-566	2.25	57.15	2.1	0.37	0.9	4	2.5	63.5	6.2	27.58	0.041	1.04	SST	N	MH
0.375	9.525	5354	2.25	57.15	4.5	0.79	1	4.45	1.6	40.64	8.8	39.14	0.045	1.14	SPR	Z	MH
0.375	9.525	5443	2.34	59.436	9.9	1.73	3	13.34	1.1	27.94	14	62.27	0.054	1.37	SST	N	FL
0.375	9.525	5769	2.38	60.452	2.5	0.44	1	4.45	2.2	55.88	6.5	28.91	0.041	1.04	HD	Z	MH
0.375	9.525	5311	2.38	60.452	5.4	0.95	2	8.9	1.5	38.1	10	44.48	0.047	1.19	SPR	Z	MH
0.375	9.525	5634	2.38	60.452	8.3	1.45	3	13.34	1.2	30.48	12	53.38	0.051	1.3	SPR	Z	MH
0.375	9.525	S-567	2.38	60.452	9.3	1.63	3	13.34	1.1	27.94	14	62.27	0.054	1.37	SST	N	MH
0.375	9.525	5342	2.44	61.976	10	1.75	3	13.34	1.1	27.94	14	62.27	0.054	1.37	SPR	Z	MH
0.375	9.525	5265	2.47	62.738	1.1	0.19	0.5	2.22	3.2	81.28	4	17.79	0.035	0.89	SPR	Z	MH
0.375	9.525	S-568	2.5	63.5	0.52	0.09	0.3	1.33	5.2	132.08	3	13.34	0.032	0.81	SST	N	MH
0.375	9.525	311	2.5	63.5	0.81	0.14	0.5	2.22	4.2	106.68	3.9	17.35	0.034	0.86	SPR	Z	FL
0.375	9.525	564	2.5	63.5	2.3	0.4	1	4.45	2.4	60.96	6.5	28.91	0.041	1.04	SPR	Z	MH
0.375	9.525	413	2.59	65.786	4.7	0.82	2	8.9	1.7	43.18	10	44.48	0.047	1.19	SPR	Z	FL
0.375	9.525	S-569	2.63	66.802	2	0.35	0.9	4	2.6	66.04	6.2	27.58	0.041	1.04	SST	N	MH
0.375	9.525	5272	2.69	68.326	0.89	0.16	0.5	2.22	3.9	99.06	4	17.79	0.035	0.89	SPR	Z	MH
0.375	9.525	513	2.69	68.326	0.92	0.16	0.5	2.22	3.8	96.52	4	17.79	0.035	0.89	SPR	Z	FL
0.375	9.525	12338	2.69	68.326	4.1	0.72	2	8.9	2	50.8	10	44.48	0.047	1.19	SPR	Z	FL
0.375	9.525	548	2.69	68.326	6.3	1.1	2	8.9	1.4	35.56	12	53.38	0.05	1.27	SPR	Z	MH
0.375	9.525	5378	2.75	69.85	9.4	1.65	3	13.34	1.2	30.48	14	62.27	0.054	1.37	SPR	Z	MH
0.375	9.525	5291	2.75	69.85	21	3.68	6	26.69	0.82	20.828	23	102.3	0.062	1.57	SPR	Z	SH
0.375	9.525	S-620	2.88	73.152	1.6	0.28	0.9	4	3.2	81.28	6.2	27.58	0.041	1.04	SST	N	MH
0.375	9.525	5814	2.88	73.152	6	1.05	3	13.34	1.6	40.64	12	53.38	0.051	1.3	HD	Z	MH
0.375	9.525	5536	2.94	74.676	0.92	0.16	0.5	2.22	3.8	96.52	4	17.79	0.035	0.89	SPR	Z	MH
0.375	9.525	5201															

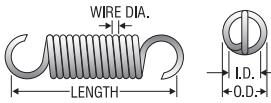


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm		Rate Lbs./In. N/mm		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm		Mat'l	F ns h e n d s					
		Inches	mm	Lbs./In.	N/mm				Inches	mm							
0.375	9.525	566	3.5	88.9	1.5	0.26	1	4.45	3.7	93.98	6.5	28.91	0.041	1.04	SPR	Z	MH
0.375	9.525	556	3.5	88.9	6.6	1.16	3	13.34	1.7	43.18	14	62.27	0.054	1.37	HD	Z	MH
0.375	9.525	118	3.5	88.9	14	2.45	6	26.69	1.2	30.48	23	102.3	0.062	1.57	HD	Z	MH
0.375	9.525	5553	3.63	92.202	0.76	0.13	0.5	2.22	4.5	114.3	3.9	17.35	0.034	0.86	SPR	Z	EH
0.375	9.525	87	3.75	95.25	1.4	0.25	1	4.45	3.8	96.52	6.5	28.91	0.041	1.04	SPR	Z	MH
0.375	9.525	150	4	101.6	0.47	0.08	0.5	2.22	7.3	185.42	3.9	17.35	0.034	0.86	SPR	Z	MH
0.375	9.525	567	4	101.6	1.3	0.23	1	4.45	4.3	109.22	6.5	28.91	0.041	1.04	SPR	Z	MH
0.375	9.525	5688	4	101.6	3.1	0.54	2	8.9	2.8	71.12	11	48.93	0.048	1.22	SPR	Z	MH
0.375	9.525	S-571	4	101.6	5	0.88	3	13.34	2.1	53.34	14	62.27	0.054	1.37	SST	N	MH
0.375	9.525	5680	4	101.6	14	2.45	6	26.69	1.3	33.02	24	106.75	0.063	1.6	SPR	Z	MH
0.375	9.525	5322	4.25	107.95	11	1.93	6	26.69	1.5	38.1	23	102.3	0.062	1.57	SPR	Z	MH
0.375	9.525	305	4.5	114.3	0.15	0.03	0.2	0.89	18	457.2	2.9	12.9	0.028	0.71	MW	Z	FL
0.375	9.525	107	4.5	114.3	0.26	0.05	0.3	1.33	14	355.6	4	17.79	0.031	0.79	MW	Z	MH
0.375	9.525	568	4.5	114.3	1.1	0.19	1	4.45	4.9	124.46	6.5	28.91	0.041	1.04	SPR	Z	MH
0.375	9.525	105	4.5	114.3	2.4	0.42	2	8.9	3.5	88.9	10	44.48	0.047	1.19	HD	Z	MH
0.375	9.525	902	5	127	0.37	0.06	0.5	2.22	13	330.2	5.2	23.13	0.034	0.86	MW	Z	MH
0.375	9.525	5821	5	127	0.43	0.08	0.5	2.22	11	279.4	5.4	24.02	0.035	0.89	MW	Z	MH
0.375	9.525	569	5	127	1	0.18	1	4.45	5.5	139.7	6.5	28.91	0.041	1.04	SPR	Z	MH
0.375	9.525	S-572	5	127	3.9	0.68	3	13.34	2.8	71.12	14	62.27	0.054	1.37	SST	N	MH
0.375	9.525	570	5.5	139.7	0.9	0.16	1	4.45	6.1	154.94	6.5	28.91	0.041	1.04	SPR	Z	MH
0.375	9.525	221	5.5	139.7	8.9	1.56	6	26.69	1.9	48.26	23	102.3	0.062	1.57	HD	Z	FL
0.375	9.525	5822	5.5	139.7	11	1.93	7	31.14	1.7	43.18	26	115.65	0.065	1.65	SPR	Z	MH
0.375	9.525	12379	5.81	147.574	1.7	0.3	2	8.9	4.8	121.92	10	44.48	0.047	1.19	SPR	Z	FL
0.375	9.525	5585	5.88	149.352	1.8	0.32	2	8.9	4.7	119.38	10	44.48	0.047	1.19	HD	Z	MH
0.375	9.525	571	6	152.4	0.82	0.14	1	4.45	6.8	172.72	6.5	28.91	0.041	1.04	SPR	Z	MH
0.375	9.525	83	6	152.4	0.81	0.14	1	4.45	6.8	172.72	6.5	28.91	0.041	1.04	SPR	Z	MH
0.375	9.525	5820	6.13	155.702	0.34	0.06	0.5	2.22	14	355.6	5.4	24.02	0.035	0.89	MW	Z	MH
0.375	9.525	191	6.5	165.1	1.6	0.28	2	8.9	5.3	134.62	10	44.48	0.047	1.19	HD	Z	FL
0.375	9.525	205	6.75	171.45	6.8	1.19	6	26.69	2.5	63.5	23	102.3	0.062	1.57	HD	Z	MH
0.375	9.525	5129	7	177.8	0.69	0.12	1	4.45	8	203.2	6.5	28.91	0.041	1.04	SPR	Z	MH
0.375	9.525	12354	7.88	200.152	0.99	0.17	1	4.45	7.4	187.96	8.8	39.14	0.045	1.14	SPR	Z	FL
0.375	9.525	5501	7.88	200.152	1.3	0.23	2	8.9	6.4	162.56	10	44.48	0.047	1.19	SPR	Z	MH
0.375	9.525	225	8	203.2	0.14	0.02	0.3	1.33	27	685.8	4	17.79	0.031	0.79	MW	Z	MH
0.375	9.525	639	10.5	266.7	2	0.35	3	13.34	5.5	139.7	14	62.27	0.054	1.37	HD	Z	MH
0.375	9.525	5468	12	304.8	0.17	0.03	0.5	2.22	20	508	4	17.79	0.035	0.89	SPR	N	MH
0.375	9.525	6104	16.4	416.56	1.3	0.23	3.45	15.35	8.6	218.44	11	48.93	0.054	1.37	HD	Z	FL
0.39	9.906	ZZ2-51	0.91	23.114	2.6	0.46	0.3	1.33	1.3	33.02	3.8	16.9	0.031	0.79	MW	N	MH
0.39	9.906	5232	1.06	26.924	0.65	0.11	0.1	0.44	2.7	68.58	1.9	8.45	0.024	0.61	MW	Z	FL
0.39	9.906	ZZ2-39	1.06	26.924	6.4	1.12	0.9	4	0.84	21.336	6.2	27.58	0.041	1.04	SPR	Z	MH
0.39	9.906	ZZ2-52	1.13	28.702	37	6.48	3	13.34	0.31	7.874	15	66.72	0.056	1.42	SST	N	MH
0.39	9.906	B3-19	1.5	38.1	3.6	0.63	0.9	4	1.5	38.1	6.2	27.58	0.041	1.04	SPR	N	MH
0.39	9.906	5475	2.88	73.152	17	2.98	5	22.24	0.97	24.638	22	97.86	0.062	1.57	SPR	Z	MH
0.39	9.906	5827	2.94	74.676	0.65	0.11	0.4	1.78	5	127	3.7	16.46	0.035	0.89	SST	N	DL
0.39	9.906	12358	7.88	200.152	0.53	0.09	0.9	4	10	254	6.2	27.58	0.041	1.04	SPR	N	FL
0.406	10.312	B18-137	1.16	29.464	4.2	0.74	0.8	3.56	1.1	27.94	5.5	24.46	0.04	1.02	SPR	Z	MH
0.406	10.312	5169	1.5	38.1	3.3	0.58	0.8	3.56	1.5	38.1	6	26.69	0.041	1.04	SPR	Z	MH
0.406	10.312	5551	1.5	38.1	4	0.7	0.8	3.56	1.3	33.02	6	26.69	0.041	1.04	SPR	Z	MH
0.406	10.312	6077	3.13	79.502	9.2	1.61	3	13.34	1.8	45.72	20	88.96	0.056	1.42	MW	N	EH
0.406	10.312	581	3.19	81.026	13	2.28	5	22.24	1.2	30.48	22	97.86	0.063	1.6	SPR	Z	MH
0.406	10.312	306	4.5	114.3	0.37	0.06	0.4	1.78	9	228.6	3.7	16.46	0.035	0.89	SPR	Z	MH
0.406	10.312	6105	16.4	416.56	1.4	0.25	3.9	17.35	9.2	233.68	13	57.82	0.058	1.47	HD	Z	FL
0.42	10.668	80595	1	25.4	6.3	1.1	0.5	2.22	0.83	21.082	5.8	25.8	0.037	0.94	MW	N	FL
0.42	10.668	80595S	1	25.4	5.4	0.95	0.4	1.78	0.66	16.764	4	17.79	0.037	0.94	SST	N	FL
0.42	10.668	80606	1	25.4	22	3.85	0.8	3.56	0.42	10.668	10	44.48	0.045	1.14	MW	N	FL
0.42	10.668	80606S	1	25.4	19	3.33	0.7	3.11	0.33	8.382	6.9	30.69	0.045	1.14	SST	N	FL
0.42	10.668	80617	1	25.4	19	3.33	1	4.45	0.52	13.208	11	48.93	0.046	1.17	MW	N	FL
0.42	10.668	80617S	1	25.4	16	2.8	0.9	4	0.41	10.414	7.4	32.92	0.046	1.17	SST	N	FL
0.42	10.668	80628	1	25.4	43	7.53	1	4.45	0.36	9.144	17	75.62	0.055	1.4	MW	N	FL
0.42	10.668	80628S	1	25.4	36	6.3	1	4.45	0.28	7.112	12	53.38	0.055	1.4	SST	N	FL
0.42	10.668	80596	1.13	28.702	4.3	0.75	0.5	2.22	1.2	30.48	5.8	25.8	0.037	0.94	MW	N	FL
0.42	10.668	80596S	1.13	28.702	3.6	0.63	0.4	1.78	0.98	24.892	4	17.79	0.037	0.94	SST	N	FL
0.42	10.668	80607	1.13	28.702	14	2.45	0.8	3.56	0.64	16.256	10	44.48	0.045	1.14	MW	N	FL
0.42	10.668	80607S	1.13	28.702	12	2.1	0.7	3.11	0.5	12.7	6.9	30.69	0.045	1.14	SST	N	FL
0.42	10.668	80618	1.13	28.702	13	2.28	1	4.45	0.74	18.796	11	48.93	0.046	1.17	MW	N	FL
0.42	10.668	80618S	1.13	28.702	11	1.93	0.9	4	0.59	14.986	7.4	32.92	0.046	1.17	SST	N	FL
0.42	10.668	80629	1.13	28.702	31	5.43	1	4.45	0.5	12.7	17	75.62	0.055	1.4	MW	N	FL
0.42	10.668	80629S	1.13	28.702	26	4.55	1	4.45	0.4	10.16	12	53.38	0.05				




O.D. Inches mm	Century Stock Number	Length Inches mm	Rate		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm	Mat'l	F in sh	E nd s						
			Lbs./In.	N/mm													
0.42	10.668	80620S	1.38	35.052	6.8	1.19	0.9	4	0.97	24.638	7.4	32.92	0.046	1.17	SST	N	FL
0.42	10.668	80631	1.38	35.052	20	3.5	1	4.45	0.78	19.812	17	75.62	0.055	1.4	MW	N	FL
0.42	10.668	80631S	1.38	35.052	17	2.98	1	4.45	0.62	15.748	12	53.38	0.055	1.4	SST	N	FL
0.42	10.668	80599	1.5	38.1	2.1	0.37	0.5	2.22	2.5	63.5	5.8	25.8	0.037	0.94	MW	N	FL
0.42	10.668	80599S	1.5	38.1	1.8	0.32	0.4	1.78	2	50.8	4	17.79	0.037	0.94	SST	N	FL
0.42	10.668	80610	1.5	38.1	6.9	1.21	0.8	3.56	1.3	33.02	10	44.48	0.045	1.14	MW	N	FL
0.42	10.668	80610S	1.5	38.1	5.9	1.03	0.7	3.11	1.1	27.94	6.9	30.69	0.045	1.14	SST	N	FL
0.42	10.668	80621	1.5	38.1	6.8	1.19	1	4.45	1.4	35.56	11	48.93	0.046	1.17	MW	N	FL
0.42	10.668	80621S	1.5	38.1	5.8	1.02	0.9	4	1.1	27.94	7.4	32.92	0.046	1.17	SST	N	FL
0.42	10.668	80632	1.5	38.1	17	2.98	1	4.45	0.92	23.368	17	75.62	0.055	1.4	MW	N	FL
0.42	10.668	80632S	1.5	38.1	14	2.45	1	4.45	0.73	18.542	12	53.38	0.055	1.4	SST	N	FL
0.42	10.668	80600	1.75	44.45	1.7	0.3	0.5	2.22	3.2	81.28	5.8	25.8	0.037	0.94	MW	N	FL
0.42	10.668	80600S	1.75	44.45	1.4	0.25	0.4	1.78	2.5	63.5	4	17.79	0.037	0.94	SST	N	FL
0.42	10.668	80611	1.75	44.45	5.1	0.89	0.8	3.56	1.8	45.72	10	44.48	0.045	1.14	MW	N	FL
0.42	10.668	80611S	1.75	44.45	4.3	0.75	0.7	3.11	1.4	35.56	6.9	30.69	0.045	1.14	SST	N	FL
0.42	10.668	80622	1.75	44.45	5.1	0.89	1	4.45	1.9	48.26	11	48.93	0.046	1.17	MW	N	FL
0.42	10.668	80622S	1.75	44.45	4.3	0.75	0.9	4	1.5	38.1	7.4	32.92	0.046	1.17	SST	N	FL
0.42	10.668	80633	1.75	44.45	13	2.28	1	4.45	1.2	30.48	17	75.62	0.055	1.4	MW	N	FL
0.42	10.668	80633S	1.75	44.45	11	1.93	1	4.45	0.95	24.13	12	53.38	0.055	1.4	SST	N	FL
0.42	10.668	80601	2	50.8	1.3	0.23	0.59	2.62	4	101.6	5.8	25.8	0.037	0.94	MW	N	FL
0.42	10.668	80601S	2	50.8	1.1	0.19	0.4	1.78	3.2	81.28	4	17.79	0.037	0.94	SST	N	FL
0.42	10.668	80612	2	50.8	4.1	0.72	0.8	3.56	2.2	55.88	10	44.48	0.045	1.14	MW	N	FL
0.42	10.668	80612S	2	50.8	3.5	0.61	0.7	3.11	1.8	45.72	6.9	30.69	0.045	1.14	SST	N	FL
0.42	10.668	80623	2	50.8	4.1	0.72	1	4.45	2.4	60.96	11	48.93	0.046	1.17	MW	N	FL
0.42	10.668	80623S	2	50.8	3.5	0.61	0.9	4	1.9	48.26	7.4	32.92	0.046	1.17	SST	N	FL
0.42	10.668	5338	2	50.8	10	1.75	2	8.9	1	25.4	13	57.82	0.054	1.37	SPR	Z	MH
0.42	10.668	80634	2	50.8	11	1.93	1	4.45	1.5	38.1	17	75.62	0.055	1.4	MW	N	FL
0.42	10.668	80634S	2	50.8	9	1.58	1	4.45	1.2	30.48	12	53.38	0.055	1.4	SST	N	FL
0.42	10.668	80602	2.25	57.15	1.1	0.19	0.5	2.22	4.8	121.92	5.8	25.8	0.037	0.94	MW	N	FL
0.42	10.668	80602S	2.25	57.15	0.92	0.16	0.4	1.78	3.8	96.52	4	17.79	0.037	0.94	SST	N	FL
0.42	10.668	80613	2.25	57.15	3.4	0.6	0.8	3.56	2.7	68.58	10	44.48	0.045	1.14	MW	N	FL
0.42	10.668	80613S	2.25	57.15	2.9	0.51	0.7	3.11	2.1	53.34	6.9	30.69	0.045	1.14	SST	N	FL
0.42	10.668	80624	2.25	57.15	3.4	0.6	1	4.45	2.9	73.66	11	48.93	0.046	1.17	MW	N	FL
0.42	10.668	80624S	2.25	57.15	2.9	0.51	0.9	4	2.3	58.42	7.4	32.92	0.046	1.17	SST	N	FL
0.42	10.668	80635	2.25	57.15	8.9	1.56	1	4.45	1.7	43.18	17	75.62	0.055	1.4	MW	N	FL
0.42	10.668	80635S	2.25	57.15	7.6	1.33	1	4.45	1.4	35.56	12	53.38	0.055	1.4	SST	N	FL
0.42	10.668	80603	2.5	63.5	0.93	0.16	0.5	2.22	5.7	144.78	5.8	25.8	0.037	0.94	MW	N	FL
0.42	10.668	80603S	2.5	63.5	0.79	0.14	0.4	1.78	4.5	114.3	4	17.79	0.037	0.94	SST	N	FL
0.42	10.668	80614	2.5	63.5	2.9	0.51	0.8	3.56	3.2	81.28	10	44.48	0.045	1.14	MW	N	FL
0.42	10.668	80614S	2.5	63.5	2.5	0.44	0.7	3.11	2.5	63.5	6.9	30.69	0.045	1.14	SST	N	FL
0.42	10.668	80625	2.5	63.5	2.9	0.51	1	4.45	3.4	86.36	11	48.93	0.046	1.17	MW	N	FL
0.42	10.668	80625S	2.5	63.5	2.5	0.44	0.9	4	2.7	68.58	7.4	32.92	0.046	1.17	SST	N	FL
0.42	10.668	80636	2.5	63.5	7.6	1.33	1	4.45	2	50.8	17	75.62	0.055	1.4	MW	N	FL
0.42	10.668	80636S	2.5	63.5	6.5	1.14	1	4.45	1.6	40.64	12	53.38	0.055	1.4	SST	N	FL
0.42	10.668	5479	2.56	65.024	16	2.8	5	22.24	0.92	23.368	20	88.96	0.062	1.57	SPR	Z	MH
0.42	10.668	80604	2.75	69.85	0.83	0.15	0.5	2.22	6.4	162.56	5.8	25.8	0.037	0.94	MW	N	FL
0.42	10.668	80604S	2.75	69.85	0.7	0.12	0.4	1.78	5	127	4	17.79	0.037	0.94	SST	N	FL
0.42	10.668	80615	2.75	69.85	2.5	0.44	0.8	3.56	3.7	93.98	10	44.48	0.045	1.14	MW	N	FL
0.42	10.668	80615S	2.75	69.85	2.1	0.37	0.7	3.11	2.9	73.66	6.9	30.69	0.045	1.14	SST	N	FL
0.42	10.668	80626	2.75	69.85	2.6	0.46	1	4.45	3.8	96.52	11	48.93	0.046	1.17	MW	N	FL
0.42	10.668	80626S	2.75	69.85	2.2	0.39	0.9	4	3	76.2	7.4	32.92	0.046	1.17	SST	N	FL
0.42	10.668	80637	2.75	69.85	6.7	1.17	1	4.45	2.3	58.42	17	75.62	0.055	1.4	MW	N	FL
0.42	10.668	80637S	2.75	69.85	5.7	1	1	4.45	1.8	45.72	12	53.38	0.055	1.4	SST	N	FL
0.42	10.668	80605	3	76.2	0.73	0.13	0.5	2.22	7.2	182.88	5.8	25.8	0.037	0.94	MW	N	FL
0.42	10.668	80605SS	3	76.2	0.62	0.11	0.4	1.78	5.7	144.78	4	17.79	0.037	0.94	SST	N	FL
0.42	10.668	80616	3	76.2	2.3	0.4	0.8	3.56	4	101.6	10	44.48	0.045	1.14	MW	N	FL
0.42	10.668	80616S	3	76.2	2	0.35	0.7	3.11	3.2	81.28	6.9	30.69	0.045	1.14	SST	N	FL
0.42	10.668	80627	3	76.2	2.3	0.4	1	4.45	4.4	111.76	11	48.93	0.046	1.17	MW	N	FL
0.42	10.668	80627S	3	76.2	1.9	0.33	0.9	4	3.4	86.36	7.4	32.92	0.046	1.17	SST	N	FL
0.42	10.668	80638	3	76.2	6	1.05	1	4.45	2.6	66.04	17	75.62	0.055	1.4	MW	N	FL
0.42	10.668	80638S	3	76.2	5.1	0.89	1	4.45	2	50.8	12	53.38	0.055	1.4	SST	N	FL
0.42	10.668	5592	3.88	98.552	4.1	0.72	2	8.9	2.5	63.5	13	57.82	0.054	1.37	SPR	Z	MH
0.42	10.668	5621	4.38	111.252	0.35	0.06	0.4	1.78	9.1	231.14	3.6	16.01	0.035	0.89	SPR	Z	FL
0.437	11.1	N-106	0.88	22.352	34	5.95	2	8.9	0.31	7.874	13	57.82	0.055	1.4	SPR	Z	MH
0.437	11.1	S-573	1	25.4	4.4	0.77	0.7	3.11	1	25.4	5.2	23.13	0.041	1.04	SST	N	FL
0.437	11.1	M-62	1	25.4	34	5.95	2	8.9	0.31	7.874	13	57.82	0.055	1.4	SPR	Z	MH
0.437	11.1	5348	1.22	30.988	8	1.4	0.9	4	0.69	17.526	6.4	28.47	0.043	1.09	SPR	Z	MH
0.437	11.1	5454	1.22	30.988	136	23.8											

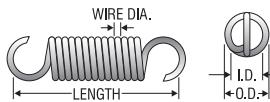


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm		Rate Lbs./In. N/mm		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm		Mat'l	F ns h s e n d s					
		Inches	mm	Lbs./In.	N/mm				Inches	mm							
0.437	11.1	B3-21	1.63	41.402	11	1.93	2	8.9	0.94	23.876	13	57.82	0.055	1.4	SPR	Z	MH
0.437	11.1	B3-27	1.66	42.164	3.7	0.65	1	4.45	1.7	43.18	7.4	32.92	0.045	1.14	SPR	N	MH
0.437	11.1	5243	1.75	44.45	0.25	0.04	0.1	0.44	8.5	215.9	2.2	9.79	0.027	0.69	MW	Z	MH
0.437	11.1	ZZ2-47	1.75	44.45	21	3.68	4	17.79	0.72	18.288	19	84.51	0.062	1.57	SPR	Z	MH
0.437	11.1	ZZ4-66	1.75	44.45	23	4.03	4	17.79	0.65	16.51	19	84.51	0.062	1.57	SPR	Z	MH
0.437	11.1	185-B	1.88	47.752	0.3	0.05	0.1	0.44	7.8	198.12	2.5	11.12	0.028	0.71	MW	Z	FL
0.437	11.1	186-B	1.88	47.752	4.3	0.75	1	4.45	2.3	58.42	11	48.93	0.047	1.19	MW	Z	MH
0.437	11.1	S-574	2	50.8	1.7	0.3	0.7	3.11	2.7	68.58	5.2	23.13	0.041	1.04	SST	N	MH
0.437	11.1	5037	2	50.8	5.5	0.96	2	8.9	1.4	35.56	9.6	42.7	0.05	1.27	SPR	Z	FL
0.437	11.1	226	2	50.8	17	2.98	4	17.79	0.87	22.098	19	84.51	0.062	1.57	HD	Z	FL
0.437	11.1	ZZ3-63	2.09	53.086	16	2.8	4	17.79	0.93	23.622	19	84.51	0.062	1.57	SPR	Z	MH
0.437	11.1	5021	2.19	55.626	15	2.63	4	17.79	1	25.4	19	84.51	0.062	1.57	HD	Z	MH
0.437	11.1	S-575	2.25	57.15	6.5	1.14	2	8.9	1.4	35.56	12	53.38	0.054	1.37	SST	N	FL
0.437	11.1	5768	2.25	57.15	17	2.98	5	22.24	0.97	24.638	21	93.41	0.064	1.63	HD	Z	MH
0.437	11.1	554	2.38	60.452	0.2	0.04	0.1	0.44	12	304.8	2.5	11.12	0.028	0.71	MW	Z	MH
0.437	11.1	185-C	2.5	63.5	0.18	0.03	0.1	0.44	13	330.2	2.5	11.12	0.028	0.71	MW	Z	FL
0.437	11.1	186-C	2.5	63.5	3	0.53	1	4.45	3.4	86.36	11	48.93	0.047	1.19	MW	Z	MH
0.437	11.1	5464	2.5	63.5	3.7	0.65	1	4.45	2.1	53.34	9	40.03	0.048	1.22	SPR	Z	MH
0.437	11.1	5540	2.5	63.5	14	2.45	4	17.79	1.1	27.94	19	84.51	0.062	1.57	SPR	Z	FL
0.437	11.1	5662	2.63	66.802	2.9	0.51	1	4.45	2.5	63.5	8.4	37.36	0.047	1.19	SPR	Z	MH
0.437	11.1	88	2.75	69.85	0.5	0.09	0.3	1.33	5.9	149.86	3.3	14.68	0.034	0.86	HD	Z	MH
0.437	11.1	S-576	2.88	73.152	4.3	0.75	2	8.9	2.2	55.88	12	53.38	0.054	1.37	SST	N	MH
0.437	11.1	5676	2.94	74.676	2.6	0.46	1	4.45	2.8	71.12	8.4	37.36	0.047	1.19	SPR	Z	MH
0.437	11.1	S-577	3	76.2	0.97	0.17	0.7	3.11	4.6	116.84	5.2	23.13	0.041	1.04	SST	N	MH
0.437	11.1	12344	3	76.2	3.1	0.54	2	8.9	2.6	66.04	9.6	42.7	0.05	1.27	SPR	Z	MH
0.437	11.1	6088	3	76.2	5.4	0.95	2	8.9	2.8	71.12	17	75.62	0.055	1.4	MW	Z	MH
0.437	11.1	5345	3.06	77.724	24	4.2	8	35.58	0.88	22.352	29	128.99	0.072	1.83	SPR	Z	SH
0.437	11.1	S-622	3.13	79.502	19	3.33	8	35.58	1.1	27.94	28	124.54	0.072	1.83	SST	N	MH
0.437	11.1	465	3.19	81.026	1.2	0.21	0.8	3.56	4.4	111.76	5.9	26.24	0.042	1.07	SPR	Z	MH
0.437	11.1	5672	3.19	81.026	2.5	0.44	1	4.45	3	76.2	9	40.03	0.048	1.22	SPR	Z	MH
0.437	11.1	6072	3.31	84.074	11	1.93	4	17.79	1.3	33.02	17	75.62	0.06	1.52	SPR	N	EH
0.437	11.1	5384	3.38	85.852	4.3	0.75	2	8.9	2.3	58.42	12	53.38	0.054	1.37	SPR	Z	MH
0.437	11.1	B2-69	3.38	85.852	8.6	1.51	4	17.79	1.7	43.18	19	84.51	0.062	1.57	SPR	N	EH
0.437	11.1	644	3.5	88.9	2	0.35	1	4.45	3.6	91.44	8.4	37.36	0.047	1.19	HD	Z	FL
0.437	11.1	5226	3.5	88.9	2.6	0.46	2	8.9	3	76.2	9.6	42.7	0.05	1.27	SPR	Z	MH
0.437	11.1	640	3.5	88.9	4	0.7	2	8.9	2.5	63.5	12	53.38	0.054	1.37	HD	Z	FL
0.437	11.1	5566	3.56	90.424	2.7	0.47	2	8.9	3	76.2	9.6	42.7	0.05	1.27	SPR	Z	MH
0.437	11.1	5671	3.63	92.202	2.1	0.37	1	4.45	3.6	91.44	9	40.03	0.048	1.22	SPR	Z	MH
0.437	11.1	5546	3.88	98.552	2.5	0.44	2	8.9	3.3	83.82	10	44.48	0.051	1.3	SPR	Z	FL
0.437	11.1	5673	3.94	100.076	1.8	0.32	1	4.45	4.1	104.14	8.4	37.36	0.047	1.19	SPR	Z	MH
0.437	11.1	S-578	4	101.6	3.1	0.54	2	8.9	3.1	78.74	12	53.38	0.054	1.37	SST	N	MH
0.437	11.1	5373	4.31	109.474	1.5	0.26	1	4.45	4.7	119.38	8.4	37.36	0.047	1.19	SPR	Z	MH
0.437	11.1	5165	4.44	112.776	1.5	0.26	1	4.45	4.8	121.92	8.4	37.36	0.047	1.19	HD	Z	MH
0.437	11.1	304	4.5	114.3	0.09	0.02	0.1	0.44	25	635	2.5	11.12	0.028	0.71	MW	Z	FL
0.437	11.1	106	4.5	114.3	0.68	0.12	0.7	3.11	7	177.8	5.5	24.46	0.041	1.04	SPR	Z	MH
0.437	11.1	5596	5.81	147.574	2.5	0.44	2	8.9	4.2	106.68	13	57.82	0.055	1.4	SPR	Z	MH
0.437	11.1	12341	5.81	147.574	4.3	0.75	4	17.79	3.3	83.82	18	80.06	0.061	1.55	SPR	N	MH
0.437	11.1	12340	5.88	149.352	4.6	0.81	4	17.79	3.2	81.28	19	84.51	0.062	1.57	SPR	N	FL
0.437	11.1	82	6	152.4	4.7	0.82	4	17.79	3.2	81.28	19	84.51	0.062	1.57	HD	Z	MH
0.437	11.1	206	7	177.8	3.9	0.68	4	17.79	3.9	99.06	19	84.51	0.062	1.57	HD	Z	MH
0.437	11.1	583	7.5	190.5	2.1	0.37	3	13.34	5.4	137.16	14	62.27	0.056	1.42	SPR	Z	MH
0.437	11.1	5666	8	203.2	1.6	0.28	2	8.9	6.2	157.48	12	53.38	0.054	1.37	SPR	Z	MH
0.437	11.1	119	8.5	215.9	0.73	0.13	1	4.45	9.9	251.46	8.4	37.36	0.047	1.19	HD	Z	MH
0.437	11.1	120	8.5	215.9	1.5	0.26	2	8.9	6.7	170.18	12	53.38	0.054	1.37	HD	Z	MH
0.437	11.1	121	8.5	215.9	7.3	1.28	8	35.58	2.9	73.66	29	128.99	0.072	1.83	HD	Z	MH
0.437	11.1	204	9.5	241.3	2.8	0.49	4	17.79	5.3	134.62	19	84.51	0.062	1.57	HD	Z	MH
0.437	11.1	207	10.3	261.62	0.28	0.05	0.7	3.11	17	431.8	5.5	24.46	0.041	1.04	SPR	Z	DL
0.453	11.506	482	1.19	30.226	0.78	0.14	0.2	0.89	4.3	109.22	3.6	16.01	0.032	0.81	MW	Z	MH
0.453	11.506	5383	1.25	31.75	7.8	1.37	0.5	2.22	0.52	13.208	4.6	20.46	0.039	0.99	SPR	Z	EH
0.453	11.506	474	1.38	35.052	23	4.03	3	13.34	0.58	14.732	16	71.17	0.06	1.52	SPR	Z	MH
0.453	11.506	483	2.25	57.15	3	0.53	1	4.45	2.3	58.42	8.1	36.03	0.047	1.19	SPR	Z	MH
0.453	11.506	5631	3.25	82.55	2.6	0.46	0.7	3.11	1.8	45.72	5.4	24.02	0.041	1.04	SPR	Z	EH
0.453	11.506	12337	3.88	98.552	2	0.35	2	8.9	3.8	96.52	9.2	40.92	0.05	1.27	SPR	Z	FL
0.453	11.506	5473	6	152.4	4.2	0.74	4	17.79	3.4	86.36	18	80.06	0.062	1.57	SPR	Z	MH
0.453	11.506	5816	6.75	171.45	0.83	0.15	1	4.45	8.3	210.82	8.1	36.03	0.047	1.19	HD	Z	MH
0.468	11.887	496	2	50.8	4.2	0.74	1	4.45	1.8	45.72	8.9	39.59	0.05	1.27	SPR	Z	FL
0.468	11.887	B3-22	2.25	57.15	11	1.93	4	17.79	1.8	45.72	23	102.3	0.062	1.57	MW	Z	EH
0.468</td																	




O.D. Inches mm	Century Stock Number	Length Inches mm	Rate Lbs./In. N/mm	Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm	Mat'l	F	E							
									in	sh							
0.5	12.7	80671S	1	25.4	19	3.33	0.6	2.67	0.29	7.366	5.9	26.24	0.045	1.14	SST	N	FL
0.5	12.7	5234	1	25.4	138	24.15	9	40.03	0.19	4.826	35	155.68	0.08	2.03	SPR	Z	MH
0.5	12.7	80639	1.25	31.75	2.1	0.37	0.3	1.33	1.7	43.18	3.9	17.35	0.034	0.86	MW	N	FL
0.5	12.7	80639S	1.25	31.75	1.8	0.32	0.3	1.33	1.3	33.02	2.7	12.01	0.034	0.86	SST	N	FL
0.5	12.7	80645	1.25	31.75	2.9	0.51	0.4	1.78	1.5	38.1	4.8	21.35	0.037	0.94	MW	N	FL
0.5	12.7	80645S	1.25	31.75	2.5	0.44	0.3	1.33	1.2	30.48	3.3	14.68	0.037	0.94	SST	N	FL
0.5	12.7	80658	1.25	31.75	4.9	0.86	0.5	2.22	1.2	30.48	6.5	28.91	0.041	1.04	MW	N	FL
0.5	12.7	80658S	1.25	31.75	4.1	0.72	0.4	1.78	0.98	24.892	4.5	20.02	0.041	1.04	SST	N	FL
0.5	12.7	6011	1.25	31.75	2.2	0.39	0.5	2.22	1.8	45.72	4.5	20.02	0.041	1.04	SST	N	FL
0.5	12.7	80672	1.25	31.75	8.5	1.49	0.7	3.11	0.93	23.622	8.6	38.25	0.045	1.14	MW	N	FL
0.5	12.7	80672S	1.25	31.75	7.2	1.26	0.6	2.67	0.74	18.796	5.9	26.24	0.045	1.14	SST	N	FL
0.5	12.7	80685	1.25	31.75	13	2.28	0.9	4	0.78	19.812	11	48.93	0.049	1.24	MW	N	FL
0.5	12.7	80685S	1.25	31.75	11	1.93	0.7	3.11	0.61	15.494	7.5	33.36	0.049	1.24	SST	N	FL
0.5	12.7	80698	1.25	31.75	23	4.03	1	4.45	0.58	14.732	14	62.27	0.055	1.4	MW	N	FL
0.5	12.7	80698S	1.25	31.75	19	3.33	1	4.45	0.46	11.684	9.9	44.04	0.055	1.4	SST	N	FL
0.5	12.7	80711	1.25	31.75	44	7.7	2	8.9	0.45	11.43	21	93.41	0.063	1.6	MW	N	FL
0.5	12.7	80711S	1.25	31.75	37	6.48	2	8.9	0.34	8.636	16.1	71.61	0.0625	1.59	SST	N	FL
0.5	12.7	6022	1.25	31.75	21	3.68	3	13.34	0.608	15.443	16	71.17	0.063	1.6	SST	N	FL
0.5	12.7	80724	1.25	31.75	55	9.63	4	17.79	0.42	10.668	27	120.1	0.067	1.7	MW	N	FL
0.5	12.7	80724S	1.25	31.75	47	8.23	3	13.34	0.33	8.382	19	84.51	0.067	1.7	SST	N	FL
0.5	12.7	80736	1.25	31.75	74	12.95	2	8.9	0.34	8.636	28	124.54	0.069	1.75	MW	N	FL
0.5	12.7	80736S	1.25	31.75	63	11.03	2	8.9	0.27	6.858	19	84.51	0.069	1.75	SST	N	FL
0.5	12.7	80749	1.25	31.75	108	18.9	3	13.34	0.28	7.112	33	146.78	0.075	1.91	MW	N	FL
0.5	12.7	80749S	1.25	31.75	92	16.1	2	8.9	0.22	5.588	22	97.86	0.075	1.91	SST	N	FL
0.5	12.7	5367	1.25	31.75	99	17.33	9	40.03	0.26	6.604	35	155.68	0.08	2.03	SPR	Z	FL
0.5	12.7	5786	1.31	33.274	17	2.98	3	13.34	0.741	18.821	15	66.72	0.062	1.57	SST	N	FL
0.5	12.7	B7-69	1.34	34.036	1.9	0.33	0.5	2.22	2.1	53.34	4.5	20.02	0.04	1.02	SPR	N	FL
0.5	12.7	80640	1.38	35.052	1.6	0.28	0.3	1.33	2.3	58.42	3.9	17.35	0.034	0.86	MW	N	FL
0.5	12.7	80640S	1.38	35.052	1.3	0.23	0.3	1.33	1.8	45.72	2.7	12.01	0.034	0.86	SST	N	FL
0.5	12.7	80646	1.38	35.052	2.2	0.39	0.4	1.78	2.1	53.34	4.8	21.35	0.037	0.94	MW	N	FL
0.5	12.7	6008	1.38	35.052	1.1	0.19	0.3	1.33	2.7	68.58	3.3	14.68	0.037	0.94	SST	N	FL
0.5	12.7	80659	1.38	35.052	3.7	0.65	0.5	2.22	1.6	40.64	6.5	28.91	0.041	1.04	MW	N	FL
0.5	12.7	80659S	1.38	35.052	3.1	0.54	0.4	1.78	1.3	33.02	4.5	20.02	0.041	1.04	SST	N	FL
0.5	12.7	B1-46	1.38	35.052	2.6	0.46	0.5	2.22	1.9	48.26	5.4	24.02	0.044	1.12	SST	N	MH
0.5	12.7	80673	1.38	35.052	5.7	1	0.7	3.11	1.4	35.56	8.6	38.25	0.045	1.14	MW	N	FL
0.5	12.7	6013	1.38	35.052	3	0.53	0.7	3.11	1.7	43.18	6.1	27.13	0.045	1.14	SST	N	FL
0.5	12.7	80686	1.38	35.052	10	1.75	0.9	4	0.99	25.146	11	48.93	0.049	1.24	MW	N	FL
0.5	12.7	80686S	1.38	35.052	8.6	1.51	0.7	3.11	0.78	19.812	7.5	33.36	0.049	1.24	SST	N	FL
0.5	12.7	80699	1.38	35.052	16	2.8	1	4.45	0.84	21.336	14	62.27	0.055	1.4	MW	N	FL
0.5	12.7	80699S	1.38	35.052	13	2.28	1	4.45	0.66	16.764	9.9	44.04	0.055	1.4	SST	N	FL
0.5	12.7	80712	1.38	35.052	31	5.43	2	8.9	0.62	15.748	21	93.41	0.063	1.6	MW	N	FL
0.5	12.7	80712S	1.38	35.052	27	4.73	2	8.9	0.466	11.836	16.1	71.61	0.0625	1.59	SST	N	FL
0.5	12.7	5879	1.38	35.052	20	3.5	3	13.34	0.68	17.272	17	75.62	0.063	1.6	SPR	N	FL
0.5	12.7	80737	1.38	35.052	54	9.45	2	8.9	0.47	11.938	28	124.54	0.069	1.75	MW	N	FL
0.5	12.7	80737S	1.38	35.052	46	8.05	2	8.9	0.37	9.398	19	84.51	0.069	1.75	SST	N	FL
0.5	12.7	80750	1.38	35.052	85	14.88	3	13.34	0.36	9.144	33	146.78	0.075	1.91	MW	N	FL
0.5	12.7	80750S	1.38	35.052	72	12.6	2	8.9	0.28	7.112	22	97.86	0.075	1.91	SST	N	FL
0.5	12.7	732	1.38	35.052	84	14.7	9	40.03	0.31	7.874	35	155.68	0.08	2.03	HD	Z	MH
0.5	12.7	543	1.44	36.576	19	3.33	3	13.34	0.64	16.256	15	66.72	0.06	1.52	SPR	Z	FL
0.5	12.7	ZZ3-32	1.44	36.576	49	8.58	6	26.69	0.38	9.652	25	111.2	0.072	1.83	SPR	GI	MH
0.5	12.7	80641	1.5	38.1	1.2	0.21	0.3	1.33	3	76.2	3.9	17.35	0.034	0.86	MW	N	FL
0.5	12.7	80641S	1.5	38.1	1	0.18	0.3	1.33	2.4	60.96	2.7	12.01	0.034	0.86	SST	N	FL
0.5	12.7	80647	1.5	38.1	1.7	0.3	0.4	1.78	2.6	66.04	4.8	21.35	0.037	0.94	MW	N	FL
0.5	12.7	6009	1.5	38.1	0.95	0.17	0.3	1.33	3.1	78.74	3.3	14.68	0.037	0.94	SST	N	FL
0.5	12.7	80660	1.5	38.1	2.9	0.51	0.5	2.22	2.1	53.34	6.5	28.91	0.041	1.04	MW	N	FL
0.5	12.7	80660S	1.5	38.1	2.5	0.44	0.4	1.78	1.6	40.64	4.5	20.02	0.041	1.04	SST	N	FL
0.5	12.7	80674	1.5	38.1	4.7	0.82	0.7	3.11	1.7	43.18	8.6	38.25	0.045	1.14	MW	N	FL
0.5	12.7	80674S	1.5	38.1	4	0.7	0.6	2.67	1.3	33.02	5.9	26.24	0.045	1.14	SST	N	FL
0.5	12.7	80687	1.5	38.1	7.5	1.31	0.9	4	1.3	33.02	11	48.93	0.049	1.24	MW	N	FL
0.5	12.7	80687S	1.5	38.1	6.4	1.12	0.7	3.11	1	25.4	7.5	33.36	0.049	1.24	SST	N	FL
0.5	12.7	S-606	1.5	38.1	7.3	1.28	2	8.9	1.1	27.94	9.9	44.04	0.054	1.37	SST	N	MH
0.5	12.7	80700	1.5	38.1	13	2.28	1	4.45	1	25.4	14	62.27	0.055	1.4	MW	N	FL
0.5	12.7	80700S	1.5	38.1	11	1.93	1	4.45	0.8	20.32	9.9	44.04	0.055	1.4	SST	N	FL
0.5	12.7	80713	1.5	38.1	26	4.55	2	8.9	0.76	19.304	21	93.41	0.063	1.6	MW	N	FL
0.5	12.7	80713S	1.5	38.1	22	3.85	2	8.9	0.572	14.529	16.1	71.61	0.0625	1.59	SST	N	FL
0.5	12.7	80725	1.5	38.1	36	6.3	4	17.79	0.66	16.764	27	120.1	0.067	1.7	MW	N	FL
0.5	12.7	80725S	1.5	38.1	30	5.25	3	13.34	0.52	13.208	19	84.51	0.067	1.7	SST	N	FL
0.5	12.7	80738	1.5	38.1	45	7.88	2	8.9	0.56	14.224	28	124.54	0.069	1.7			

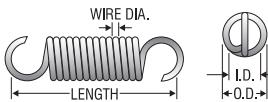


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length		Rate		Initial Tension		Sugg Max. Defl.		Sugg Max. load		Wire Dia.		Mat'l	F nsh	E nds	
		Inches	mm	Lbs./In.	N/mm	Lbs.	N	Inches	mm	Lbs.	N	Inches	mm				
0.5	12.7	681	1.63	41.402	66	11.55	9	40.03	0.39	9.906	35	155.68	0.08	2.03	HD	Z	FL
0.5	12.7	473	1.66	42.164	18	3.15	3	13.34	0.81	20.574	18	80.06	0.064	1.63	SPR	Z	MH
0.5	12.7	80642	1.75	44.45	0.8	0.14	0.3	1.33	4.6	116.84	3.9	17.35	0.034	0.86	MW	N	FL
0.5	12.7	80642S	1.75	44.45	0.68	0.12	0.3	1.33	3.6	91.44	2.7	12.01	0.034	0.86	SST	N	FL
0.5	12.7	B6-70	1.75	44.45	0.73	0.13	0.3	1.33	4	101.6	3.2	14.23	0.036	0.91	SPR	GI	FL
0.5	12.7	80648	1.75	44.45	1.2	0.21	0.4	1.78	3.7	93.98	4.8	21.35	0.037	0.94	MW	N	FL
0.5	12.7	80648S	1.75	44.45	1	0.18	0.3	1.33	2.9	73.66	3.3	14.68	0.037	0.94	SST	N	FL
0.5	12.7	5929	1.75	44.45	0.85	0.15	0.3	1.33	3.7	93.98	3.5	15.57	0.037	0.94	SPR	Z	FL
0.5	12.7	80661	1.75	44.45	2.1	0.37	0.5	2.22	2.9	73.66	6.5	28.91	0.041	1.04	MW	N	FL
0.5	12.7	80661S	1.75	44.45	1.7	0.3	0.4	1.78	2.3	58.42	4.5	20.02	0.041	1.04	SST	N	FL
0.5	12.7	6012	1.75	44.45	1.3	0.23	0.5	2.22	3.1	78.74	4.5	20.02	0.041	1.04	SST	N	FL
0.5	12.7	80675	1.75	44.45	3.4	0.6	0.7	3.11	2.4	60.96	8.6	38.25	0.045	1.14	MW	N	FL
0.5	12.7	6015	1.75	44.45	2.1	0.37	0.7	3.11	2.5	63.5	6.1	27.13	0.045	1.14	SST	N	FL
0.5	12.7	80688	1.75	44.45	5.3	0.93	0.9	4	1.9	48.26	11	48.93	0.049	1.24	MW	N	FL
0.5	12.7	80688S	1.75	44.45	4.5	0.79	0.7	3.11	1.5	38.1	7.5	33.36	0.049	1.24	SST	N	FL
0.5	12.7	80701	1.75	44.45	9.2	1.61	1	4.45	1.4	35.56	14	62.27	0.055	1.4	MW	N	FL
0.5	12.7	80701S	1.75	44.45	7.8	1.37	1	4.45	1.1	27.94	9.9	44.04	0.055	1.4	SST	N	FL
0.5	12.7	5932	1.75	44.45	6.8	1.19	2	8.9	1.4	35.56	11	48.93	0.055	1.4	SPR	Z	FL
0.5	12.7	5703	1.75	44.45	17	2.98	3	13.34	0.78	19.812	16	71.17	0.062	1.57	SPR	GI	MH
0.5	12.7	80714	1.75	44.45	19	3.33	2	8.9	1	25.4	21	93.41	0.063	1.6	MW	N	FL
0.5	12.7	80714S	1.75	44.45	16	2.8	2	8.9	0.882	22.403	16.1	71.61	0.0625	1.59	SST	N	FL
0.5	12.7	5936	1.75	44.45	14	2.45	3	13.34	0.98	24.892	17	75.62	0.063	1.6	SPR	Z	FL
0.5	12.7	80726	1.75	44.45	26	4.55	4	17.79	0.89	22.606	27	120.1	0.067	1.7	MW	N	FL
0.5	12.7	80726S	1.75	44.45	22	3.85	3	13.34	0.7	17.78	19	84.51	0.067	1.7	SST	N	FL
0.5	12.7	80739	1.75	44.45	31	5.43	2	8.9	0.81	20.574	28	124.54	0.069	1.75	MW	N	FL
0.5	12.7	80739S	1.75	44.45	27	4.73	2	8.9	0.64	16.256	19	84.51	0.069	1.75	SST	N	FL
0.5	12.7	80752	1.75	44.45	49	8.58	3	13.34	0.61	15.494	33	146.78	0.075	1.91	MW	N	FL
0.5	12.7	80752S	1.75	44.45	42	7.35	2	8.9	0.48	12.192	22	97.86	0.075	1.91	SST	N	FL
0.5	12.7	B1-42	1.81	45.974	16	2.8	3	13.34	0.87	22.098	17	75.62	0.063	1.6	SPR	N	FL
0.5	12.7	5233	1.88	47.752	1.4	0.25	0.5	2.22	3	76.2	4.8	21.35	0.041	1.04	SPR	N	MH
0.5	12.7	5872	1.88	47.752	6.2	1.09	2	8.9	1.5	38.1	11	48.93	0.055	1.4	SPR	Z	FL
0.5	12.7	6023	1.88	47.752	11	1.93	3	13.34	1.105	28.067	16	71.17	0.063	1.6	SST	N	FL
0.5	12.7	5572	1.88	47.752	88	15.4	14	62.27	0.38	9.652	48	213.5	0.088	2.24	SPR	Z	MH
0.5	12.7	S-610	1.94	49.276	12	2.1	3	13.34	1.133	28.778	16.1	71.61	0.0625	1.59	SST	N	MH
0.5	12.7	682	1.94	49.276	48	8.4	9	40.03	0.53	13.462	35	155.68	0.08	2.03	HD	Z	FL
0.5	12.7	80643	2	50.8	0.61	0.11	0.3	1.33	6	152.4	3.9	17.35	0.034	0.86	MW	N	FL
0.5	12.7	80643S	2	50.8	0.51	0.09	0.3	1.33	4.7	119.38	2.7	12.01	0.034	0.86	SST	N	FL
0.5	12.7	80649	2	50.8	0.95	0.17	0.4	1.78	4.7	119.38	4.8	21.35	0.037	0.94	MW	N	FL
0.5	12.7	80649S	2	50.8	0.81	0.14	0.3	1.33	3.7	93.98	3.3	14.68	0.037	0.94	SST	N	FL
0.5	12.7	ZZ3-44	2	50.8	0.88	0.15	0.3	1.33	3.6	91.44	3.5	15.57	0.037	0.94	SPR	Z	MH
0.5	12.7	80662	2	50.8	1.6	0.28	0.5	2.22	3.9	99.06	6.5	28.91	0.041	1.04	MW	N	FL
0.5	12.7	80662S	2	50.8	1.3	0.23	0.4	1.78	3.1	78.74	4.5	20.02	0.041	1.04	SST	N	FL
0.5	12.7	80676	2	50.8	2.6	0.46	0.7	3.11	3	76.2	8.6	38.25	0.045	1.14	MW	N	FL
0.5	12.7	80676S	2	50.8	2.2	0.39	0.6	2.67	2.4	60.96	5.9	26.24	0.045	1.14	SST	N	FL
0.5	12.7	80689	2	50.8	4.1	0.72	0.9	4	2.4	60.96	11	48.93	0.049	1.24	MW	N	FL
0.5	12.7	80689S	2	50.8	3.5	0.61	0.7	3.11	1.9	48.26	7.5	33.36	0.049	1.24	SST	N	FL
0.5	12.7	80702	2	50.8	7.4	1.3	1	4.45	1.8	45.72	14	62.27	0.055	1.4	MW	N	FL
0.5	12.7	80702S	2	50.8	6.3	1.1	1	4.45	1.4	35.56	9.9	44.04	0.055	1.4	SST	N	FL
0.5	12.7	5873	2	50.8	5.6	0.98	2	8.9	1.6	40.64	11	48.93	0.055	1.4	SPR	Z	FL
0.5	12.7	5258	2	50.8	13	2.28	3	13.34	1	25.4	16	71.17	0.062	1.57	HD	Z	FL
0.5	12.7	80715	2	50.8	15	2.63	2	8.9	1.3	33.02	21	93.41	0.063	1.6	MW	N	FL
0.5	12.7	80715S	2	50.8	13	2.28	2	8.9	1.05	26.67	16.1	71.61	0.0625	1.59	SST	N	FL
0.5	12.7	5689	2	50.8	18	3.15	4	17.79	0.85	21.59	19	84.51	0.065	1.65	SPR	Z	MH
0.5	12.7	80727	2	50.8	21	3.68	4	17.79	1.1	27.94	27	120.1	0.067	1.7	MW	N	FL
0.5	12.7	80727S	2	50.8	18	3.15	3	13.34	0.89	22.606	19	84.51	0.067	1.7	SST	N	FL
0.5	12.7	80740	2	50.8	25	4.38	2	8.9	1	25.4	28	124.54	0.069	1.75	MW	N	FL
0.5	12.7	80740S	2	50.8	21	3.68	2	8.9	0.81	20.574	19	84.51	0.069	1.75	SST	N	FL
0.5	12.7	5538	2	50.8	23	4.03	6	26.69	0.82	20.828	25	111.2	0.072	1.83	HD	Z	MH
0.5	12.7	80753	2	50.8	38	6.65	3	13.34	0.79	20.066	33	146.78	0.075	1.91	MW	N	FL
0.5	12.7	80753S	2	50.8	32	5.6	2	8.9	0.62	15.748	22	97.86	0.075	1.91	SST	N	FL
0.5	12.7	B1-61	2.03	51.562	2.5	0.44	0.8	3.56	2.2	55.88	6.4	28.47	0.046	1.17	SST	N	FL
0.5	12.7	5288	2.13	54.102	2.2	0.39	0.8	3.56	2.5	63.5	6.4	28.47	0.045	1.14	SPR	GI	MH
0.5	12.7	6016	2.13	54.102	1.6	0.28	0.7	3.11	3.3	83.82	6.1	27.13	0.045	1.14	SST	N	FL
0.5	12.7	5933	2.13	54.102	5.2	0.91	2	8.9	1.8	45.72	11	48.93	0.055	1.4	SPR	Z	FL
0.5	12.7	B1-57	2.13	54.102	14	2.45	3	13.34	1	25.4	18	80.06	0.064	1.63	SPR	N	FL
0.5	12.7	5823	2.19	55.626	4.1	0.72	2	8.9	2	50.8	9.9	44.04	0.054	1.37	SST	N	MH
0.5	12.7	683	2.19	55.626	42	7.35	9	40.03	0.61	15.494	35	155.68	0.08	2.03	HD	Z	FL
0.5	12.7	M-123	2.22	56.388	19	3.33	5	22.24	0.95	24.13	24	106.75	0.071	1.8	SPR	N	FL




O.D. Inches mm	Century Stock Number	Length Inches mm	Rate Lbs./In. N/mm	Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm	Mat'l	F	E							
									in	sh							
0.5	12.7	80690S	2.25	57.15	2.8	0.49	0.7	3.11	2.4	60.96	7.5	33.36	0.049	1.24	SST	N	FL
0.5	12.7	80703	2.25	57.15	6.1	1.07	1	4.45	2.2	55.88	14	62.27	0.055	1.4	MW	N	FL
0.5	12.7	6018	2.25	57.15	4.3	0.75	2	8.9	2.1	53.34	11	48.93	0.055	1.4	SST	N	FL
0.5	12.7	80716	2.25	57.15	12	2.1	2	8.9	1.6	40.64	21	93.41	0.063	1.6	MW	N	FL
0.5	12.7	80716S	2.25	57.15	10	1.75	2	8.9	1.271	32.283	16.1	71.61	0.0625	1.59	SST	N	FL
0.5	12.7	5937	2.25	57.15	10	1.75	3	13.34	1.4	35.56	17	75.62	0.063	1.6	SPR	Z	FL
0.5	12.7	80728	2.25	57.15	17	2.98	4	17.79	1.4	35.56	27	120.1	0.067	1.7	MW	N	FL
0.5	12.7	80728S	2.25	57.15	15	2.63	3	13.34	1.1	27.94	19	84.51	0.067	1.7	SST	N	FL
0.5	12.7	80741	2.25	57.15	20	3.5	2	8.9	1.3	33.02	28	124.54	0.069	1.75	MW	N	FL
0.5	12.7	80741S	2.25	57.15	17	2.98	2	8.9	0.99	25.146	19	84.51	0.069	1.75	SST	N	FL
0.5	12.7	80754	2.25	57.15	32	5.6	3	13.34	0.95	24.13	33	146.78	0.075	1.91	MW	N	FL
0.5	12.7	80754S	2.25	57.15	27	4.73	2	8.9	0.74	18.796	22	97.86	0.075	1.91	SST	N	FL
0.5	12.7	ZZ1-68	2.31	58.674	1.1	0.19	0.5	2.22	3.7	93.98	4.5	20.02	0.041	1.04	SST	N	FL
0.5	12.7	5534	2.31	58.674	4.9	0.86	2	8.9	1.9	48.26	11	48.93	0.055	1.4	SPR	Z	MH
0.5	12.7	6019	2.38	60.452	4	0.7	2	8.9	2.2	55.88	11	48.93	0.055	1.4	SST	N	FL
0.5	12.7	5440	2.41	61.214	2	0.35	0.9	4	3.1	78.74	7.2	32.03	0.047	1.19	SPR	Z	MH
0.5	12.7	5340	2.41	61.214	5.3	0.93	2	8.9	1.7	43.18	11	48.93	0.055	1.4	SPR	Z	MH
0.5	12.7	5795	2.44	61.976	9	1.58	3	13.34	1.382	35.103	15	66.72	0.062	1.57	SST	N	FL
0.5	12.7	80651	2.5	63.5	0.7	0.12	0.4	1.78	6.3	160.02	4.8	21.35	0.037	0.94	MW	N	FL
0.5	12.7	80651S	2.5	63.5	0.6	0.11	0.3	1.33	5	127	3.3	14.68	0.037	0.94	SST	N	FL
0.5	12.7	80664	2.5	63.5	1.1	0.19	0.5	2.22	5.4	137.16	6.5	28.91	0.041	1.04	MW	N	FL
0.5	12.7	80664S	2.5	63.5	0.94	0.16	0.4	1.78	4.3	109.22	4.5	20.02	0.041	1.04	SST	N	FL
0.5	12.7	80678	2.5	63.5	1.8	0.32	0.7	3.11	4.4	111.76	8.6	38.25	0.045	1.14	MW	N	FL
0.5	12.7	80678S	2.5	63.5	1.5	0.26	0.6	2.67	3.5	88.9	5.9	26.24	0.045	1.14	SST	N	FL
0.5	12.7	214	2.5	63.5	1.9	0.33	0.9	4	3.3	83.82	7.2	32.03	0.047	1.19	HD	Z	FL
0.5	12.7	80691	2.5	63.5	2.8	0.49	0.9	4	3.6	91.44	11	48.93	0.049	1.24	MW	N	FL
0.5	12.7	80691S	2.5	63.5	2.4	0.42	0.7	3.11	2.8	71.12	7.5	33.36	0.049	1.24	SST	N	FL
0.5	12.7	S-579	2.5	63.5	3.4	0.6	2	8.9	2.5	63.5	9.9	44.04	0.054	1.37	SST	N	MH
0.5	12.7	80704	2.5	63.5	5.2	0.91	1	4.45	2.5	63.5	14	62.27	0.055	1.4	MW	N	FL
0.5	12.7	80704S	2.5	63.5	4.4	0.77	1	4.45	2	50.8	9.9	44.04	0.055	1.4	SST	N	FL
0.5	12.7	5874	2.5	63.5	4.2	0.74	2	8.9	2.2	55.88	11	48.93	0.055	1.4	SPR	Z	FL
0.5	12.7	80717	2.5	63.5	11	1.93	2	8.9	1.9	48.26	21	93.41	0.063	1.6	MW	N	FL
0.5	12.7	80717S	2.5	63.5	9	1.58	2	8.9	1.437	36.5	16.1	71.61	0.0625	1.59	SST	N	FL
0.5	12.7	80729	2.5	63.5	15	2.63	4	17.79	1.6	40.64	27	120.1	0.067	1.7	MW	N	FL
0.5	12.7	80729S	2.5	63.5	12	2.1	3	13.34	1.3	33.02	19	84.51	0.067	1.7	SST	N	FL
0.5	12.7	80742	2.5	63.5	17	2.98	2	8.9	1.5	38.1	28	124.54	0.069	1.75	MW	N	FL
0.5	12.7	80742S	2.5	63.5	15	2.63	2	8.9	1.2	30.48	19	84.51	0.069	1.75	SST	N	FL
0.5	12.7	80755	2.5	63.5	27	4.73	3	13.34	1.1	27.94	33	146.78	0.075	1.91	MW	N	FL
0.5	12.7	80755S	2.5	63.5	23	4.03	2	8.9	0.88	22.352	22	97.86	0.075	1.91	SST	N	FL
0.5	12.7	223	2.5	63.5	33	5.78	9	40.03	0.77	19.558	35	155.68	0.08	2.03	HD	Z	FL
0.5	12.7	B6-64	2.59	65.786	7.6	1.33	3	13.34	1.7	43.18	16	71.17	0.062	1.57	SPR	GI	MH
0.5	12.7	545	2.66	67.564	17	2.98	6	26.69	1.1	27.94	25	111.2	0.072	1.83	HD	Z	FL
0.5	12.7	80652	2.75	69.85	0.6	0.11	0.4	1.78	7.4	187.96	4.8	21.35	0.037	0.94	MW	N	FL
0.5	12.7	80652S	2.75	69.85	0.51	0.09	0.3	1.33	5.8	147.32	3.3	14.68	0.037	0.94	SST	N	FL
0.5	12.7	80665	2.75	69.85	0.98	0.17	0.5	2.22	6.1	154.94	6.5	28.91	0.041	1.04	MW	N	FL
0.5	12.7	80665S	2.75	69.85	0.83	0.15	0.4	1.78	4.8	121.92	4.5	20.02	0.041	1.04	SST	N	FL
0.5	12.7	80679	2.75	69.85	1.6	0.28	0.7	3.11	5	127	8.6	38.25	0.045	1.14	MW	N	FL
0.5	12.7	80679S	2.75	69.85	1.3	0.23	0.6	2.67	4	101.6	5.9	26.24	0.045	1.14	SST	N	FL
0.5	12.7	80692	2.75	69.85	2.4	0.42	0.9	4	4.2	106.68	11	48.93	0.049	1.24	MW	N	FL
0.5	12.7	80692S	2.75	69.85	2	0.35	0.7	3.11	3.3	83.82	7.5	33.36	0.049	1.24	SST	N	FL
0.5	12.7	80705	2.75	69.85	4.5	0.79	1	4.45	2.9	73.66	14	62.27	0.055	1.4	MW	N	FL
0.5	12.7	5875	2.75	69.85	3.7	0.65	2	8.9	2.5	63.5	11	48.93	0.055	1.4	SPR	Z	FL
0.5	12.7	6020	2.75	69.85	3.3	0.58	2	8.9	2.7	68.58	11	48.93	0.055	1.4	SST	N	FL
0.5	12.7	80718	2.75	69.85	9.2	1.61	2	8.9	2.1	53.34	21	93.41	0.063	1.6	MW	N	FL
0.5	12.7	80718S	2.75	69.85	7.8	1.37	2	8.9	1.741	44.221	16.1	71.61	0.0625	1.59	SST	N	FL
0.5	12.7	B5-49	2.75	69.85	7.7	1.35	3	13.34	1.8	45.72	17	75.62	0.063	1.6	SPR	N	MH
0.5	12.7	80730	2.75	69.85	13	2.28	4	17.79	1.8	45.72	27	120.1	0.067	1.7	MW	N	FL
0.5	12.7	80730S	2.75	69.85	11	1.93	3	13.34	1.4	35.56	19	84.51	0.067	1.7	SST	N	FL
0.5	12.7	80743	2.75	69.85	15	2.63	2	8.9	1.7	43.18	28	124.54	0.069	1.75	MW	N	FL
0.5	12.7	80743S	2.75	69.85	13	2.28	2	8.9	1.4	35.56	19	84.51	0.069	1.75	SST	N	FL
0.5	12.7	80756	2.75	69.85	23	4.03	3	13.34	1.3	33.02	33	146.78	0.075	1.91	MW	N	FL
0.5	12.7	80756S	2.75	69.85	20	3.5	2	8.9	1	25.4	22	97.86	0.075	1.91	SST	N	FL
0.5	12.7	5123	2.78	70.612	7.3	1.28	3	13.34	1.8	45.72	16	71.17	0.062	1.57	HD	Z	MH
0.5	12.7	551	2.88	73.152	60	10.5	16	71.17	0.59	14.986	51	226.85	0.091	2.31	HD	Z	MH
0.5	12.7	80653	3	76.2	0.5	0.09	0.4	1.78	8.9	226.06	4.8	21.35	0.037	0.94	MW	N	FL
0.5	12.7	80653S	3	76.2	0.43	0.08	0.3	1.33	7	177.8	3.3	14.68	0.037	0.94	SST	N	FL
0.5	12.7	80666	3	76.2	0.8	0.14	0.5	2.22	7.5	190.5	6.5	28.91	0.041	1.04	MW	N	FL
0.5	12.7	80666S	3	76.2	0.68	0.12	0.4	1.78	5.9	149.86	4.5	20.02	0.041	1.04	SST	N	FL
0.5	12.7	80680	3	76.2	1.4	0.25	0.7	3.11	5								

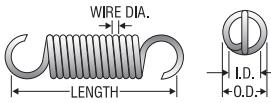


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm		Rate Lbs./In. N/mm		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm		Mat'l	F nsh Ends					
		Inches	mm	Lbs./In.	N/mm				Inches	mm							
0.5	12.7	80744	3	76.2	13	2.28	2	8.9	1.9	48.26	28	124.54	0.069	1.75	MW	N	FL
0.5	12.7	80744S	3	76.2	11	1.93	2	8.9	1.5	38.1	19	84.51	0.069	1.75	SST	N	FL
0.5	12.7	S-580	3	76.2	12	2.1	5	22.24	1.4	35.56	23	102.3	0.072	1.83	SST	N	MH
0.5	12.7	80757	3	76.2	21	3.68	3	13.34	1.5	38.1	33	146.78	0.075	1.91	MW	N	FL
0.5	12.7	80757S	3	76.2	18	3.15	2	8.9	1.1	27.94	22	97.86	0.075	1.91	SST	N	FL
0.5	12.7	227	3	76.2	55	9.63	16	71.17	0.64	16.256	51	226.85	0.091	2.31	HD	Z	FL
0.5	12.7	B6-48	3.03	76.962	5.8	1.02	3	13.34	2.2	55.88	15	66.72	0.061	1.55	SPR	N	FL
0.5	12.7	538	3.13	79.502	17	2.98	7	31.14	1.2	30.48	28	124.54	0.075	1.91	SPR	Z	MH
0.5	12.7	5071	3.19	81.026	8.3	1.45	3	13.34	1.6	40.64	16	71.17	0.062	1.57	SPR	Z	EH
0.5	12.7	5574	3.19	81.026	18	3.15	7	31.14	1.2	30.48	28	124.54	0.075	1.91	SPR	Z	MH
0.5	12.7	B6-53	3.25	82.55	4.7	0.82	3	13.34	2.5	63.5	15	66.72	0.061	1.55	SST	N	FL
0.5	12.7	5581	3.38	85.852	5.9	1.03	3	13.34	2.2	55.88	16	71.17	0.062	1.57	HD	Z	MH
0.5	12.7	S-623	3.38	85.852	4.8	0.84	3	13.34	2.57	65.278	16.1	71.61	0.0625	1.59	SST	N	MH
0.5	12.7	5000	3.44	87.376	2.8	0.49	2	8.9	3.2	81.28	10	44.48	0.054	1.37	SPR	Z	MH
0.5	12.7	5328	3.44	87.376	3	0.53	2	8.9	3	76.2	10	44.48	0.054	1.37	SPR	GI	MH
0.5	12.7	80654	3.5	88.9	0.4	0.07	0.4	1.78	11	279.4	4.8	21.35	0.037	0.94	MW	N	FL
0.5	12.7	80654S	3.5	88.9	0.34	0.06	0.3	1.33	8.8	223.52	3.3	14.68	0.037	0.94	SST	N	FL
0.5	12.7	80667	3.5	88.9	0.7	0.12	0.5	2.22	8.6	218.44	6.5	28.91	0.041	1.04	MW	N	FL
0.5	12.7	80667S	3.5	88.9	0.6	0.11	0.4	1.78	6.8	172.72	4.5	20.02	0.041	1.04	SST	N	FL
0.5	12.7	80681	3.5	88.9	1.1	0.19	0.7	3.11	7.2	182.88	8.6	38.25	0.045	1.14	MW	N	FL
0.5	12.7	80681S	3.5	88.9	0.94	0.16	0.6	2.67	5.7	144.78	5.9	26.24	0.045	1.14	SST	N	FL
0.5	12.7	215	3.5	88.9	1.2	0.21	0.9	4	5.1	129.54	7.2	32.03	0.047	1.19	HD	Z	MH
0.5	12.7	80694	3.5	88.9	1.7	0.3	0.9	4	5.8	147.32	11	48.93	0.049	1.24	MW	N	FL
0.5	12.7	80694S	3.5	88.9	1.5	0.26	0.7	3.11	4.6	116.84	7.5	33.36	0.049	1.24	SST	N	FL
0.5	12.7	S-581	3.5	88.9	2.2	0.39	2	8.9	3.7	93.98	9.9	44.04	0.054	1.37	SST	N	FL
0.5	12.7	80707	3.5	88.9	3.2	0.56	1	4.45	4.1	104.14	14	62.27	0.055	1.4	MW	N	FL
0.5	12.7	6021	3.5	88.9	2.5	0.44	2	8.9	3.6	91.44	11	48.93	0.055	1.4	SST	N	FL
0.5	12.7	228	3.5	88.9	5.4	0.95	3	13.34	2.4	60.96	16	71.17	0.062	1.57	HD	Z	MH
0.5	12.7	80720	3.5	88.9	6.7	1.17	2	8.9	2.9	73.66	21	93.41	0.063	1.6	MW	N	FL
0.5	12.7	80720S	3.5	88.9	5.7	1	2	8.9	2.209	56.109	16.1	71.61	0.0625	1.59	SST	N	FL
0.5	12.7	80732	3.5	88.9	9.2	1.61	4	17.79	2.5	63.5	27	120.1	0.067	1.7	MW	N	FL
0.5	12.7	80732S	3.5	88.9	7.8	1.37	3	13.34	2	50.8	19	84.51	0.067	1.7	SST	N	FL
0.5	12.7	80745	3.5	88.9	11	1.93	2	8.9	2.4	60.96	28	124.54	0.069	1.75	MW	N	FL
0.5	12.7	80745S	3.5	88.9	9.1	1.59	2	8.9	1.9	48.26	19	84.51	0.069	1.75	SST	N	FL
0.5	12.7	224	3.5	88.9	12	2.1	6	26.69	1.6	40.64	25	111.2	0.072	1.83	HD	Z	FL
0.5	12.7	S-582	3.5	88.9	11	1.93	5	22.24	1.6	40.64	23	102.3	0.072	1.83	SST	N	MH
0.5	12.7	80758	3.5	88.9	17	2.98	3	13.34	1.8	45.72	33	146.78	0.075	1.91	MW	N	FL
0.5	12.7	80758S	3.5	88.9	14	2.45	2	8.9	1.4	35.56	22	97.86	0.075	1.91	SST	N	FL
0.5	12.7	5333	3.75	95.25	1.6	0.28	1	4.45	4.4	111.76	8.2	36.47	0.05	1.27	SPR	Z	MH
0.5	12.7	550	3.75	95.25	2.3	0.4	2	8.9	3.8	96.52	10	44.48	0.054	1.37	HD	Z	MH
0.5	12.7	B5-41	3.75	95.25	2.1	0.37	2	8.9	4	101.6	9.9	44.04	0.054	1.37	SST	N	MH
0.5	12.7	5881	3.75	95.25	5.3	0.93	3	13.34	2.6	66.04	17	75.62	0.063	1.6	SPR	Z	FL
0.5	12.7	481	3.8	96.52	0.1	0.02	0.1	0.44	24	609.6	2.7	12.01	0.03	0.76	MW	Z	FL
0.5	12.7	476	3.84	97.536	2.5	0.44	2	8.9	3.6	91.44	10	44.48	0.054	1.37	HD	Z	EH
0.5	12.7	5157	3.88	98.552	1.1	0.19	0.9	4	5.6	142.24	7.2	32.03	0.047	1.19	HD	Z	MH
0.5	12.7	12352	3.91	99.314	4.3	0.75	3	13.34	3	76.2	15	66.72	0.061	1.55	SPR	Z	FL
0.5	12.7	5446	4	101.6	0.11	0.02	0.1	0.44	24	609.6	2.7	12.01	0.03	0.76	MW	Z	MH
0.5	12.7	80655	4	101.6	0.3	0.05	0.4	1.78	15	381	4.8	21.35	0.037	0.94	MW	N	FL
0.5	12.7	80655S	4	101.6	0.26	0.05	0.3	1.33	12	304.8	3.3	14.68	0.037	0.94	SST	N	FL
0.5	12.7	80668	4	101.6	0.6	0.11	0.5	2.22	10	254	6.5	28.91	0.041	1.04	MW	N	FL
0.5	12.7	80668S	4	101.6	0.51	0.09	0.4	1.78	7.9	200.66	4.5	20.02	0.041	1.04	SST	N	FL
0.5	12.7	5618	4	101.6	0.51	0.09	0.5	2.22	8.4	213.36	4.8	21.35	0.041	1.04	SPR	Z	MH
0.5	12.7	80682	4	101.6	0.9	0.16	0.7	3.11	8.8	223.52	8.6	38.25	0.045	1.14	MW	N	FL
0.5	12.7	80682S	4	101.6	0.77	0.13	0.6	2.67	7	177.8	5.9	26.24	0.045	1.14	SST	N	FL
0.5	12.7	80695	4	101.6	1.4	0.25	0.9	4	7	177.8	11	48.93	0.049	1.24	MW	N	FL
0.5	12.7	80695S	4	101.6	1.2	0.21	0.7	3.11	5.5	139.7	7.5	33.36	0.049	1.24	SST	N	FL
0.5	12.7	80762	4	101.6	1.4	0.25	0.9	4	7	177.8	11	48.93	0.049	1.24	MW	N	FL
0.5	12.7	80762S	4	101.6	1.2	0.21	0.7	3.11	5.5	139.7	7.5	33.36	0.049	1.24	SST	N	FL
0.5	12.7	641	4	101.6	2.3	0.4	2	8.9	3.9	99.06	10	44.48	0.054	1.37	HD	Z	MH
0.5	12.7	80708	4	101.6	2.7	0.47	1	4.45	4.9	124.46	14	62.27	0.055	1.4	MW	N	FL
0.5	12.7	80708S	4	101.6	2.3	0.4	1	4.45	3.8	96.52	9.9	44.04	0.055	1.4	SST	N	FL
0.5	12.7	5934	4	101.6	2.4	0.42	2	8.9	3.9	99.06	11	48.93	0.055	1.4	SPR	Z	FL
0.5	12.7	B5-47	4	101.6	2.1	0.37	2	8.9	4.2	106.68	11	48.93	0.055	1.4	SST	N	MH
0.5	12.7	5647	4	101.6	5.1	0.89	3	13.34	2.6	66.04	16	71.17	0.062	1.57	SPR	Z	EH
0.5	12.7	5788	4	101.6	4.7	0.82	3	13.34	2.874	73	15	66.72	0.062	1.57	SST	N	MH
0.5	12.7	80721	4	101.6	5.6	0.98	2	8.9	3.5	88.9	21	93.41	0.063	1.6	MW	N	FL
0.5	12.7	80721S	4	101.6	4.4	0.77	3.6	16.01	2.679	68.047	16.1	71.61	0.0625	1.59	SST	N	FL
0.5	12.7	80733	4	101.6	7.8	1.37	4	17.79	3	76.2	27	120.1	0.067	1.7	MW	N	FL
0.5	12.7	80733S	4	101.6	6.6	1.16	3	13.3									




O.D. Inches mm	Century Stock Number	Length Inches mm	Rate		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm	Mat'l	F in sh	E nd s						
			Lbs./In.	N/mm													
0.5	12.7	12367	4.38	111.252	4.1	0.72	3	13.34	3.2	81.28	16	71.17	0.062	1.57	SPR	N	FL
0.5	12.7	80656	4.5	114.3	0.3	0.05	0.4	1.78	15	381	4.8	21.35	0.037	0.94	MW	N	FL
0.5	12.7	80656S	4.5	114.3	0.26	0.05	0.3	1.33	12	304.8	3.3	14.68	0.037	0.94	SST	N	FL
0.5	12.7	80669	4.5	114.3	0.5	0.09	0.5	2.22	12	304.8	6.5	28.91	0.041	1.04	MW	N	FL
0.5	12.7	80669S	4.5	114.3	0.43	0.08	0.4	1.78	9.5	241.3	4.5	20.02	0.041	1.04	SST	N	FL
0.5	12.7	80683	4.5	114.3	0.8	0.14	0.7	3.11	9.9	251.46	8.6	38.25	0.045	1.14	MW	N	FL
0.5	12.7	80683S	4.5	114.3	0.68	0.12	0.6	2.67	7.8	198.12	5.9	26.24	0.045	1.14	SST	N	FL
0.5	12.7	80696	4.5	114.3	1.2	0.21	0.9	4	8.3	210.82	11	48.93	0.049	1.24	MW	N	FL
0.5	12.7	80696S	4.5	114.3	1	0.18	0.7	3.11	6.6	167.64	7.5	33.36	0.049	1.24	SST	N	FL
0.5	12.7	5003	4.5	114.3	1.3	0.23	1	4.45	5.6	142.24	8.2	36.47	0.049	1.24	SPR	Z	SL
0.5	12.7	229	4.5	114.3	1.9	0.33	2	8.9	4.6	116.84	10	44.48	0.054	1.37	HD	Z	MH
0.5	12.7	80709	4.5	114.3	2.3	0.4	1	4.45	5.7	144.78	14	62.27	0.055	1.4	MW	N	FL
0.5	12.7	80709S	4.5	114.3	2	0.35	1	4.45	4.5	114.3	9.9	44.04	0.055	1.4	SST	N	FL
0.5	12.7	5878	4.5	114.3	2.3	0.4	2	8.9	4.3	109.22	12	53.38	0.056	1.42	SPR	N	FL
0.5	12.7	5935	4.5	114.3	2.8	0.49	2	8.9	3.9	99.06	13	57.82	0.058	1.47	SPR	Z	FL
0.5	12.7	92	4.5	114.3	4.1	0.72	3	13.34	3.2	81.28	16	71.17	0.062	1.57	HD	Z	MH
0.5	12.7	80722	4.5	114.3	4.8	0.84	2	8.9	4.1	104.14	21	93.41	0.063	1.6	MW	N	FL
0.5	12.7	80722S	4.5	114.3	4.1	0.72	2	8.9	3.233	82.118	16.1	71.61	0.0625	1.59	SST	N	FL
0.5	12.7	6059	4.5	114.3	4.6	0.81	3	13.34	4.2	106.68	23	102.3	0.063	1.6	MW	Z	FL
0.5	12.7	80734	4.5	114.3	6.7	1.17	4	17.79	3.5	88.9	27	120.1	0.067	1.7	MW	N	FL
0.5	12.7	80734S	4.5	114.3	5.7	1	3	13.34	2.8	71.12	19	84.51	0.067	1.7	SST	N	FL
0.5	12.7	80747	4.5	114.3	7.8	1.37	2	8.9	3.3	83.82	28	124.54	0.069	1.75	MW	N	FL
0.5	12.7	80747S	4.5	114.3	6.6	1.16	2	8.9	2.6	66.04	19	84.51	0.069	1.75	SST	N	FL
0.5	12.7	80760	4.5	114.3	12	2.1	3	13.34	2.5	63.5	33	146.78	0.075	1.91	MW	N	FL
0.5	12.7	80760S	4.5	114.3	10	1.75	2	8.9	1.9	48.26	22	97.86	0.075	1.91	SST	N	FL
0.5	12.7	S-584	4.75	120.65	1.6	0.28	2	8.9	5.3	134.62	9.9	44.04	0.054	1.37	SST	N	MH
0.5	12.7	6024	4.75	120.65	3.6	0.63	3	13.34	3.454	87.732	16	71.17	0.063	1.6	SST	N	FL
0.5	12.7	5938	4.75	120.65	4.4	0.77	3	13.34	3.3	83.82	18	80.06	0.064	1.63	SPR	Z	FL
0.5	12.7	S-585	4.75	120.65	7.5	1.31	5	22.24	2.4	60.96	23	102.3	0.072	1.83	SST	N	MH
0.5	12.7	5461	4.88	123.952	3.8	0.67	3	13.34	3.5	88.9	16	71.17	0.062	1.57	SPR	Z	MH
0.5	12.7	80657	5	127	0.2	0.04	0.4	1.78	22	558.8	4.8	21.35	0.037	0.94	MW	N	FL
0.5	12.7	80657S	5	127	0.17	0.03	0.3	1.33	18	457.2	3.3	14.68	0.037	0.94	SST	N	FL
0.5	12.7	80670	5	127	0.4	0.07	0.5	2.22	15	381	6.5	28.91	0.041	1.04	MW	N	FL
0.5	12.7	80670S	5	127	0.34	0.06	0.4	1.78	12	304.8	4.5	20.02	0.041	1.04	SST	N	FL
0.5	12.7	80684	5	127	0.7	0.12	0.7	3.11	11	279.4	8.6	38.25	0.045	1.14	MW	N	FL
0.5	12.7	80684S	5	127	0.6	0.11	0.6	2.67	8.9	226.06	5.9	26.24	0.045	1.14	SST	N	FL
0.5	12.7	80697	5	127	1.1	0.19	0.9	4	9.1	231.14	11	48.93	0.049	1.24	MW	N	FL
0.5	12.7	80697S	5	127	0.94	0.16	0.7	3.11	7.2	182.88	7.5	33.36	0.049	1.24	SST	N	FL
0.5	12.7	80710	5	127	2	0.35	1	4.45	6.4	162.56	14	62.27	0.055	1.4	MW	N	FL
0.5	12.7	80710S	5	127	1.7	0.3	1	4.45	5.1	129.54	9.9	44.04	0.055	1.4	SST	N	FL
0.5	12.7	S-586	5	127	3.1	0.54	3	13.34	4.061	103.149	16.1	71.61	0.0625	1.59	SST	N	MH
0.5	12.7	80723	5	127	4.3	0.75	2	8.9	4.6	116.84	21	93.41	0.063	1.6	MW	N	FL
0.5	12.7	80723S	5	127	3.6	0.63	2	8.9	3.62	91.948	16.1	71.61	0.0625	1.59	SST	N	FL
0.5	12.7	5939	5	127	3.8	0.67	3	13.34	3.6	91.44	17	75.62	0.063	1.6	SPR	Z	FL
0.5	12.7	80735	5	127	5.9	1.03	4	17.79	4	101.6	27	120.1	0.067	1.7	MW	N	FL
0.5	12.7	80735S	5	127	5	0.88	3	13.34	3.1	78.74	19	84.51	0.067	1.7	SST	N	FL
0.5	12.7	80748	5	127	6.8	1.19	2	8.9	3.7	93.98	28	124.54	0.069	1.75	MW	N	FL
0.5	12.7	80748S	5	127	5.8	1.02	2	8.9	3	76.2	19	84.51	0.069	1.75	SST	N	FL
0.5	12.7	94	5	127	8.2	1.44	6	26.69	2.3	58.42	25	111.2	0.072	1.83	HD	Z	MH
0.5	12.7	80761	5	127	11	1.93	3	13.34	2.8	71.12	33	146.78	0.075	1.91	MW	N	FL
0.5	12.7	80761S	5	127	9.1	1.59	2	8.9	2.2	55.88	22	97.86	0.075	1.91	SST	N	FL
0.5	12.7	5364	5.25	133.35	15	2.63	9	40.03	1.7	43.18	35	155.68	0.08	2.03	SPR	Z	MH
0.5	12.7	S-624	5.5	139.7	1.4	0.25	2	8.9	6.2	157.48	9.9	44.04	0.054	1.37	SST	N	MH
0.5	12.7	233	5.5	139.7	3.3	0.58	3	13.34	4	101.6	16	71.17	0.062	1.57	HD	Z	MH
0.5	12.7	5053	5.5	139.7	39	6.83	16	71.17	0.9	22.86	51	226.85	0.091	2.31	HD	Z	EH
0.5	12.7	5149	5.63	143.002	8.5	1.49	6	26.69	2.4	60.96	27	120.1	0.074	1.88	SPR	Z	MH
0.5	12.7	5069	5.69	144.526	7.2	1.26	6	26.69	2.6	66.04	25	111.2	0.072	1.83	SPR	Z	MH
0.5	12.7	5085	5.75	146.05	6.8	1.19	6	26.69	2.8	71.12	25	111.2	0.072	1.83	HD	Z	MH
0.5	12.7	5681	5.88	149.352	15	2.63	11	48.93	1.9	48.26	39	173.47	0.083	2.11	SPR	GI	MH
0.5	12.7	12392	6	152.4	2.4	0.42	3	13.34	5	127	15	66.72	0.06	1.52	SPR	Z	MH
0.5	12.7	5603	6	152.4	3	0.53	3	13.34	4.4	111.76	16	71.17	0.062	1.57	HD	Z	MH
0.5	12.7	5669	6	152.4	3.1	0.54	3	13.34	4.2	106.68	16	71.17	0.062	1.57	SPR	Z	MH
0.5	12.7	12372	6	152.4	3.1	0.54	3	13.34	4.4	111.76	17	75.62	0.063	1.6	SPR	Z	FL
0.5	12.7	198	6	152.4	12	2.1	9	40.03	2.2	55.88	35	155.68	0.08	2.03	HD	Z	MH
0.5	12.7	S-625	6.5	165.1	1.1	0.19	2	8.9	7.6	193.04	9.9	44.04	0.054	1.37	SST	N	MH
0.5	12.7	5023	6.63	168.402	3.4	0.6	4	17.79	4.5	114.3	19	84.51	0.065	1.65	SPR	Z	MH
0.5	12.7	5357	6.88	174.752	2.8	0.49	3	13.34	4.9	124.46	17	75.62	0.063	1.6	SPR	Z	MH
0.5	12.7	5051	7	177.8	3.1	0.54	3	13.34	3.9	99.06	15	66.72	0.06	1.52	HD	Z	EH
0.5	12.7	244	7	177.8	5.6	0.98	6	26.69	3.4	86.36	25	111.2	0.072	1.83			

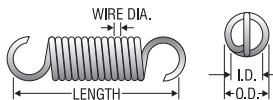


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm		Rate Lbs./In. N/mm		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm		Mat'l	F ns h e nds			
		Inches	mm	Lbs./In.	N/mm				Inches	mm					
0.5	12.7	12351	12	304.8	1.8	0.32	4	17.79	8.6	218.44	19	84.51	0.065	1.65	SPR Z MH
0.5	12.7	5528	13.3	337.82	2.8	0.49	6	26.69	6.7	170.18	25	111.2	0.072	1.83	HD Z MH
0.5	12.7	12676	16	406.4	0.42	0.07	2	8.9	20	508	9.9	44.04	0.054	1.37	SST N MH
0.5	12.7	6107	16.4	416.56	2.3	0.4	6.1	27.13	8.2	208.28	19	84.51	0.072	1.83	HD Z FL
0.515	13.081	5231	1	25.4	114	19.95	9	40.03	0.22	5.588	33	146.78	0.08	2.03	SPR Z MH
0.515	13.081	ZZ1-64	1.06	26.924	29	5.08	3	13.34	0.45	11.43	16	71.17	0.062	1.57	SPR GI MH
0.515	13.081	539	1.5	38.1	16	2.8	3	13.34	0.79	20.066	16	71.17	0.062	1.57	HD Z MH
0.515	13.081	B1-52	2.22	56.388	4.7	0.82	2	8.9	1.8	45.72	10	44.48	0.055	1.4	SST N FL
0.515	13.081	5441	2.78	70.612	54	9.45	15	66.72	0.64	16.256	49	217.95	0.091	2.31	SPR Z MH
0.515	13.081	5507	3.38	85.852	0.21	0.04	0.2	0.89	16	406.4	3.5	15.57	0.033	0.84	MW Z SL
0.515	13.081	12384	3.78	96.012	36	6.3	15	66.72	0.95	24.13	49	217.95	0.091	2.31	SPR Z MH
0.515	13.081	12374	4	101.6	8.6	1.51	5	22.24	2.1	53.34	23	102.3	0.071	1.8	SPR Z MH
0.515	13.081	12386	11.8	299.72	1.3	0.23	3	13.34	10	254	16	71.17	0.062	1.57	SPR Z DL
0.531	13.487	5312	1.63	41.402	58	10.15	8	35.58	0.42	10.668	32	142.34	0.08	2.03	SPR Z MH
0.531	13.487	B17-168	3.31	84.074	40	7	15	66.72	0.86	21.844	49	217.95	0.092	2.34	SPR Z MH
0.531	13.487	B17-178	3.78	96.012	0.2	0.04	0.2	0.89	13	330.2	2.8	12.45	0.035	0.89	SPR Z MH
0.531	13.487	12389	4	101.6	10	1.75	6	26.69	2	50.8	27	120.1	0.075	1.91	SPR Z MH
0.562	14.275	5347	2.19	55.626	18	3.15	4	17.79	0.95	24.13	22	97.86	0.072	1.83	SPR Z MH
0.562	14.275	5029	2.38	60.452	242	42.35	42	186.82	0.28	7.112	109	484.83	0.12	3.05	HD Z MH
0.562	14.275	S-587	2.5	63.5	2.4	0.42	1	4.45	3.1	78.74	8.7	38.7	0.054	1.37	SST N MH
0.562	14.275	5178	2.5	63.5	12	2.1	4	17.79	1.4	35.56	22	97.86	0.072	1.83	HD Z MH
0.562	14.275	S-588	2.75	69.85	10	1.75	4	17.79	1.6	40.64	21	93.41	0.072	1.83	SST N MH
0.562	14.275	5113	2.84	72.136	93	16.28	23	102.3	0.52	13.208	71	315.81	0.105	2.67	HD GI MH
0.562	14.275	5638	2.88	73.152	3.2	0.56	2	8.9	2.9	73.66	11	48.93	0.057	1.45	SPR Z FL
0.562	14.275	733	2.88	73.152	11	1.93	4	17.79	1.6	40.64	22	97.86	0.072	1.83	HD Z FL
0.562	14.275	642	3	76.2	2.3	0.4	1	4.45	3.4	86.36	9.2	40.92	0.054	1.37	HD Z FL
0.562	14.275	S-589	3	76.2	1.9	0.33	1	4.45	4	101.6	8.7	38.7	0.054	1.37	SST N FL
0.562	14.275	5109	3	76.2	38	6.65	12	53.38	0.85	21.59	44	195.71	0.091	2.31	HD Z MH
0.562	14.275	81	3.25	82.55	0.99	0.17	0.7	3.11	5.8	147.32	6.5	28.91	0.047	1.19	HD Z MH
0.562	14.275	S-590	3.25	82.55	29	5.08	12	53.38	1	25.4	41	182.37	0.091	2.31	SST N MH
0.562	14.275	5632	3.41	86.614	4.5	0.79	2	8.9	2.6	66.04	14	62.27	0.062	1.57	SPR Z SL
0.562	14.275	80	3.5	88.9	30	5.25	12	53.38	1.1	27.94	44	195.71	0.091	2.31	HD Z MH
0.562	14.275	5563	3.63	92.202	3.9	0.68	2	8.9	3	76.2	14	62.27	0.062	1.57	HD Z MH
0.562	14.275	5372	3.63	92.202	13	2.28	4	17.79	1.4	35.56	22	97.86	0.072	1.83	SPR Z EH
0.562	14.275	12375	3.75	95.25	3.4	0.6	2	8.9	3.5	88.9	14	62.27	0.062	1.57	SPR Z FL
0.562	14.275	S-591	3.75	95.25	6.9	1.21	4	17.79	2.4	60.96	21	93.41	0.072	1.83	SST N MH
0.562	14.275	91	4	101.6	0.76	0.13	0.7	3.11	7.6	193.04	6.5	28.91	0.047	1.19	HD Z MH
0.562	14.275	5837	4	101.6	1.1	0.19	0.9	4	8.2	208.28	10	44.48	0.05	1.27	MW Z MH
0.562	14.275	S-592	4	101.6	1.3	0.23	1	4.45	5.6	142.24	8.7	38.7	0.054	1.37	SST N MH
0.562	14.275	S-593	4.25	107.95	21	3.68	12	53.38	1.4	35.56	41	182.37	0.091	2.31	SST N MH
0.562	14.275	B5-55	4.47	113.538	0.7	0.12	0.8	3.56	8.7	220.98	6.9	30.69	0.048	1.22	SPR N MH
0.562	14.275	95	5	127	5.6	0.98	4	17.79	3.1	78.74	22	97.86	0.072	1.83	HD Z MH
0.562	14.275	S-594	5	127	4.9	0.86	4	17.79	3.3	83.82	21	93.41	0.072	1.83	SST N MH
0.562	14.275	5490	5.09	129.286	5.5	0.96	4	17.79	3.1	78.74	22	97.86	0.072	1.83	SPR Z MH
0.562	14.275	12364	5.44	138.176	8.7	1.52	7	31.14	2.7	68.58	31	137.89	0.08	2.03	SPR N FL
0.562	14.275	S-595	5.5	139.7	16	2.8	12	53.38	1.9	48.26	41	182.37	0.091	2.31	SST N MH
0.562	14.275	213	6	152.4	4.6	0.81	4	17.79	3.8	96.52	22	97.86	0.072	1.83	HD Z FL
0.562	14.275	5061	8.25	209.55	1.4	0.25	2	8.9	8.4	213.36	14	62.27	0.062	1.57	HD Z MH
0.562	14.275	5039	8.44	214.376	0.43	0.08	0.9	4	15	381	7.4	32.92	0.05	1.27	SPR Z MH
0.562	14.275	124	8.5	215.9	0.64	0.11	1	4.45	12	304.8	9.2	40.92	0.054	1.37	HD Z MH
0.562	14.275	125	8.5	215.9	1.4	0.25	2	8.9	8.6	218.44	14	62.27	0.062	1.57	HD Z MH
0.562	14.275	126	8.5	215.9	5.5	0.96	7	31.14	4.3	109.22	31	137.89	0.08	2.03	HD Z MH
0.562	14.275	5678	8.75	222.25	15	2.63	13	57.82	2.1	53.34	46	204.61	0.092	2.34	SPR Z EH
0.562	14.275	654	16.5	419.1	0.32	0.06	1	4.45	25	635	9.2	40.92	0.054	1.37	HD Z DL
0.578	14.681	5580	3.81	96.774	7.4	1.3	4	17.79	2.3	58.42	21	93.41	0.072	1.83	SPR Z MH
0.578	14.681	5648	6	152.4	4.3	0.75	4	17.79	3.9	99.06	21	93.41	0.072	1.83	SPR Z MH
0.578	14.681	12385	7.75	196.85	3.8	0.67	5	22.24	5.1	129.54	24	106.75	0.075	1.91	SPR Z MH
0.578	14.681	5659	8	203.2	3.1	0.54	4	17.79	5.4	137.16	21	93.41	0.072	1.83	SPR Z MH
0.578	14.681	4035	24	609.6	0.15	0.03	1	4.45	45	1143	7.6	33.8	0.051	1.3	SPR Z MH
0.578	14.681	4033	28.5	723.9	0.78	0.14	4	17.79	22	558.8	21	93.41	0.072	1.83	SPR Z FL
0.593	15.062	12545	1.81	45.974	8.1	1.42	2	8.9	1.5	38.1	14	62.27	0.063	1.6	HD Z MH
0.593	15.062	432	2.63	66.802	50	8.75	14	62.27	0.72	18.288	49	217.95	0.096	2.44	SPR Z MH
0.593	15.062	5297	2.75	69.85	9.4	1.65	4	17.79	1.8	45.72	20	88.96	0.072	1.83	SPR Z MH
0.593	15.062	429	3.41	86.614	7.6	1.33	4	17.79	2.2	55.88	20	88.96	0.072	1.83	SPR Z MH
0.593	15.062	5349	3.44	87.376	3.9	0.68	2	8.9	3	76.2	14	62.27	0.063	1.6	SPR Z MH
0.593	15.062	5324	3.56	90.424	12	2.1	6	26.69	1.9	48.26	29	128.99	0.08	2.03	SPR Z MH
0.593	15.062	12371	3.75	95.25	6.8	1.19	4	17.79	2.5	63.5	21	93.41	0.073	1.85	SPR Z MH
0.593	15.062	5654	3.88	98.552	8.3	1.45	5	22.24	2.2	55.88	23	102.3	0.075	1.91	SPR Z MH
0.593	15.062	5137	4	101.6	50	8.75	20	88.96	0.92	23.368	66	293.57	0.105	2.67	HD Z MH
0.593	15.062	5472	4.06	103.124	24.3	4.25	9	40.03	1.1	27.94	35.7	158.79	0.09	2.29	SPR Z FL
0.593	15.062	5542	5	127	5.7	1	5	22.24	3.3</td						




O.D. Inches mm	Century Stock Number	Length Inches mm	Rate Lbs./In. N/mm	Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm	Mat'l	F	E							
									n	s							
0.625	15.875	80783	1.75	44.45	19	3.33	2	8.9	1.1	27.94	23	102.3	0.069	1.75	MW	N	FL
0.625	15.875	80783S	1.75	44.45	16	2.8	2	8.9	0.88	22.352	16	71.17	0.069	1.75	SST	N	FL
0.625	15.875	5369	1.81	45.974	22	3.85	3	13.34	0.72	18.288	19	84.51	0.072	1.83	SPR	Z	MH
0.625	15.875	5143	1.88	47.752	61	10.68	11	48.93	0.52	13.208	43	191.26	0.094	2.39	SPR	Z	MH
0.625	15.875	80765	2	50.8	4.5	0.79	1	4.45	2.4	60.96	12	53.38	0.055	1.4	MW	N	FL
0.625	15.875	80765S	2	50.8	3.8	0.67	0.9	4	1.9	48.26	8.1	36.03	0.055	1.4	SST	N	FL
0.625	15.875	80774	2	50.8	8.9	1.56	2	8.9	1.8	45.72	17	75.62	0.063	1.6	MW	N	FL
0.625	15.875	80774S	2	50.8	7.6	1.33	1	4.45	1.429	36.297	13.1	58.27	0.0625	1.59	SST	N	FL
0.625	15.875	80784	2	50.8	14	2.45	2	8.9	1.5	38.1	23	102.3	0.069	1.75	MW	N	FL
0.625	15.875	80784S	2	50.8	12	2.1	2	8.9	1.2	30.48	16	71.17	0.069	1.75	SST	N	FL
0.625	15.875	5353	2	50.8	18	3.15	4	17.79	0.97	24.638	22	97.86	0.075	1.91	SPR	Z	MH
0.625	15.875	6056	2	50.8	203	35.53	32	142.34	0.31	7.874	94	418.11	0.12	3.05	SPR	N	MH
0.625	15.875	80766	2.25	57.15	3.5	0.61	1	4.45	3.1	78.74	12	53.38	0.055	1.4	MW	N	FL
0.625	15.875	80766S	2.25	57.15	3	0.53	0.9	4	2.4	60.96	8.1	36.03	0.055	1.4	SST	N	FL
0.625	15.875	80775	2.25	57.15	6.7	1.17	2	8.9	2.4	60.96	17	75.62	0.063	1.6	MW	N	FL
0.625	15.875	80775S	2.25	57.15	5.7	1	1	4.45	1.905	48.387	13.1	58.27	0.0625	1.59	SST	N	FL
0.625	15.875	5529	2.25	57.15	6.4	1.12	2	8.9	1.8	45.72	14	62.27	0.064	1.63	SPR	Z	MH
0.625	15.875	80785	2.25	57.15	11	1.93	2	8.9	1.8	45.72	23	102.3	0.069	1.75	MW	N	FL
0.625	15.875	80785S	2.25	57.15	9.6	1.68	2	8.9	1.4	35.56	16	71.17	0.069	1.75	SST	N	FL
0.625	15.875	5017	2.34	59.436	2.4	0.42	1	4.45	3.1	78.74	8.3	36.92	0.054	1.37	HD	Z	FL
0.625	15.875	5559	2.47	62.738	201	35.18	38	169.02	0.35	8.89	108	480.38	0.125	3.18	HD	Z	MH
0.625	15.875	80767	2.5	63.5	2.9	0.51	1	4.45	3.7	93.98	12	53.38	0.055	1.4	MW	N	FL
0.625	15.875	80767S	2.5	63.5	2.5	0.44	0.9	4	2.9	73.66	8.1	36.03	0.055	1.4	SST	N	FL
0.625	15.875	80776	2.5	63.5	5.8	1.02	2	8.9	2.7	68.58	17	75.62	0.063	1.6	MW	N	FL
0.625	15.875	80776S	2.5	63.5	4.9	0.86	1	4.45	2.204	55.982	13.1	58.27	0.0625	1.59	SST	N	FL
0.625	15.875	80786	2.5	63.5	9.4	1.65	2	8.9	2.2	55.88	23	102.3	0.069	1.75	MW	N	FL
0.625	15.875	80786S	2.5	63.5	8	1.4	2	8.9	1.7	43.18	16	71.17	0.069	1.75	SST	N	FL
0.625	15.875	650	2.5	63.5	10	1.75	3	13.34	1.5	38.1	19	84.51	0.072	1.83	HD	Z	FL
0.625	15.875	431	2.53	64.262	17	2.98	5	22.24	1.3	33.02	27	120.1	0.08	2.03	HD	Z	FL
0.625	15.875	5830	2.63	66.802	4.9	0.86	2	8.9	2.4	60.96	14	62.27	0.064	1.63	HD	Z	MH
0.625	15.875	80768	2.75	69.85	2.5	0.44	1	4.45	4.3	109.22	12	53.38	0.055	1.4	MW	N	FL
0.625	15.875	80768S	2.75	69.85	2.1	0.37	0.9	4	3.4	86.36	8.1	36.03	0.055	1.4	SST	N	FL
0.625	15.875	5503	2.75	69.85	3.8	0.67	2	8.9	2.8	71.12	13	57.82	0.062	1.57	HD	Z	MH
0.625	15.875	80777	2.75	69.85	4.9	0.86	2	8.9	3.2	81.28	17	75.62	0.063	1.6	MW	N	FL
0.625	15.875	80777S	2.75	69.85	4.2	0.74	1	4.45	2.585	65.659	13.1	58.27	0.0625	1.59	SST	N	FL
0.625	15.875	80787	2.75	69.85	8.1	1.42	2	8.9	2.6	66.04	23	102.3	0.069	1.75	MW	N	FL
0.625	15.875	80787S	2.75	69.85	6.9	1.21	2	8.9	2	50.8	16	71.17	0.069	1.75	SST	N	FL
0.625	15.875	80769	3	76.2	2.1	0.37	1	4.45	5.1	129.54	12	53.38	0.055	1.4	MW	N	FL
0.625	15.875	80769S	3	76.2	1.8	0.32	0.9	4	4.1	104.14	8.1	36.03	0.055	1.4	SST	N	FL
0.625	15.875	196	3	76.2	3.6	0.63	2	8.9	3	76.2	13	57.82	0.062	1.57	HD	Z	FL
0.625	15.875	80778	3	76.2	4.3	0.75	2	8.9	3.7	93.98	17	75.62	0.063	1.6	MW	N	FL
0.625	15.875	80778S	3	76.2	3.7	0.65	1	4.45	2.934	74.524	13.1	58.27	0.0625	1.59	SST	N	FL
0.625	15.875	80788	3	76.2	7.1	1.24	2	8.9	2.9	73.66	23	102.3	0.069	1.75	MW	N	FL
0.625	15.875	80788S	3	76.2	6	1.05	2	8.9	2.3	58.42	16	71.17	0.069	1.75	SST	N	FL
0.625	15.875	5567	3	76.2	15	2.63	5	22.24	1.4	35.56	27	120.1	0.08	2.03	SPR	Z	MH
0.625	15.875	651	3.25	82.55	6.4	1.12	3	13.34	2.4	60.96	19	84.51	0.072	1.83	HD	Z	FL
0.625	15.875	189	3.25	82.55	110	19.25	32	142.34	0.56	14.224	94	418.11	0.12	3.05	HD	Z	MH
0.625	15.875	235	3.5	88.9	0.62	0.11	0.6	2.67	8.4	213.36	5.8	25.8	0.047	1.19	HD	Z	MH
0.625	15.875	80770	3.5	88.9	1.7	0.3	1	4.45	6.4	162.56	12	53.38	0.055	1.4	MW	N	FL
0.625	15.875	80770S	3.5	88.9	1.4	0.25	0.9	4	5	127	8.1	36.03	0.055	1.4	SST	N	FL
0.625	15.875	80779	3.5	88.9	3.4	0.6	2	8.9	4.7	119.38	17	75.62	0.063	1.6	MW	N	FL
0.625	15.875	80779S	3.5	88.9	2.9	0.51	1	4.45	3.901	99.085	13.1	58.27	0.0625	1.59	SST	N	FL
0.625	15.875	80789	3.5	88.9	5.6	0.98	2	8.9	3.7	93.98	23	102.3	0.069	1.75	MW	N	FL
0.625	15.875	80789S	3.5	88.9	4.8	0.84	2	8.9	2.9	73.66	16	71.17	0.069	1.75	SST	N	FL
0.625	15.875	S-596	3.5	88.9	5.2	0.91	3	13.34	2.9	73.66	18	80.06	0.072	1.83	SST	N	MH
0.625	15.875	5282	3.5	88.9	32	5.6	14	62.27	1.2	30.48	51	226.85	0.099	2.51	SPR	GI	MH
0.625	15.875	5560	3.63	92.202	7.6	1.33	4	17.79	2.3	58.42	22	97.86	0.075	1.91	SPR	Z	MH
0.625	15.875	S-626	3.63	92.202	24	4.2	11	48.93	1.3	33.02	42	186.82	0.095	2.41	SST	N	MH
0.625	15.875	5533	3.63	92.202	122	21.35	38	169.02	0.57	14.478	108	480.38	0.125	3.18	HD	Z	MH
0.625	15.875	S-643	3.69	93.726	24	4.2	11	48.93	1.3	33.02	42	186.82	0.095	2.41	SST	N	MH
0.625	15.875	5649	3.75	95.25	6.9	1.21	4	17.79	2.6	66.04	22	97.86	0.075	1.91	SPR	Z	MH
0.625	15.875	80771	4	101.6	1.4	0.25	1	4.45	7.7	195.58	12	53.38	0.055	1.4	MW	N	FL
0.625	15.875	80771S	4	101.6	1.2	0.21	0.9	4	6.1	154.94	8.1	36.03	0.055	1.4	SST	N	FL
0.625	15.875	80780	4	101.6	2.9	0.51	2	8.9	5.5	139.7	17	75.62	0.063	1.6	MW	N	FL
0.625	15.875	80780S	4	101.6	2.5	0.44	1	4.45	4.343	110.312	13.1	58.27	0.0625	1.59	SST	N	FL
0.625	15.875	80790	4	101.6	4.6	0.81	2	8.9	4.5	114.3	23	102.3	0.069	1.75	MW	N	FL
0.625	15.875	80790S	4	101.6	3.9	0.68	2	8.9	3.6	91.44	16	71.17	0.069	1.75	SST	N	FL
0.625	15.875	218	4	101.6</													

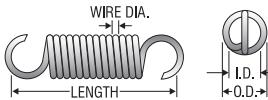


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm		Rate Lbs./In. N/mm		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm		Mat'l	F n s h e s	
		Inches	mm	Lbs./In.	N/mm				Inches	mm			
0.625	15.875	80792S	5 127	2.9	0.51	2	8.9	4.7	119.38	16	71.17	0.069	1.75
0.625	15.875	S-599	5 127	12	2.1	9	40.03	2.2	55.88	36	160.13	0.091	2.31
0.625	15.875	5471	5.13 130.302	0.22	0.04	0.3	1.33	16	406.4	3.9	17.35	0.041	1.04
0.625	15.875	5565	5.44 138.176	1.7	0.3	2	8.9	6.3	160.02	13	57.82	0.062	1.57
0.625	15.875	90	5.5 139.7	6.4	1.12	5	22.24	3.4	86.36	27	120.1	0.08	2.03
0.625	15.875	5600	5.81 147.574	6.7	1.17	6	26.69	3.4	86.36	29	128.99	0.082	2.08
0.625	15.875	S-600	6 152.4	2.8	0.49	3	13.34	5.3	134.62	18	80.06	0.072	1.83
0.625	15.875	5015	6.25 158.75	5.4	0.95	5	22.24	3.9	99.06	27	120.1	0.08	2.03
0.625	15.875	5493	6.38 162.052	8.6	1.51	8	35.58	3.2	81.28	35	155.68	0.087	2.21
0.625	15.875	643	6.5 165.1	0.65	0.11	1	4.45	11	279.4	8.3	36.92	0.054	1.37
0.625	15.875	99	6.5 165.1	5.3	0.93	5	22.24	4.1	104.14	27	120.1	0.08	2.03
0.625	15.875	5833	6.75 171.45	0.64	0.11	1	4.45	11	279.4	8.3	36.92	0.054	1.37
0.625	15.875	5460	7.31 185.674	13	2.28	10	44.48	2	50.8	36	160.13	0.092	2.34
0.625	15.875	5013	7.5 190.5	3.1	0.54	4	17.79	5.7	144.78	22	97.86	0.075	1.91
0.625	15.875	12355	7.94 201.676	2.4	0.42	4	17.79	6.7	170.18	20	88.96	0.073	1.85
0.625	15.875	127	8.5 215.9	0.95	0.17	2	8.9	11	279.4	13	57.82	0.062	1.57
0.625	15.875	128	8.5 215.9	2.1	0.37	3	13.34	7.3	185.42	19	84.51	0.072	1.83
0.625	15.875	638	8.5 215.9	3.9	0.68	5	22.24	5.5	139.7	27	120.1	0.08	2.03
0.625	15.875	129	8.5 215.9	7.7	1.35	9	40.03	3.8	96.52	39	173.47	0.091	2.31
0.625	15.875	234	8.5 215.9	36	6.3	32	142.34	1.7	43.18	94	418.11	0.12	3.05
0.625	15.875	12369	11.8 299.72	1.5	0.26	3	13.34	11	279.4	19	84.51	0.072	1.83
0.625	15.875	5001	12 304.8	0.17	0.03	0.6	2.67	32	812.8	6.2	27.58	0.048	1.22
0.625	15.875	6055	14.3 363.22	2.5	0.44	6	26.69	9.2	233.68	29	128.99	0.082	2.08
0.625	15.875	4005	24.5 622.3	1.2	0.21	5	22.24	17	431.8	27	120.1	0.08	2.03
0.64	16.256	5798	1.94 49.276	6.5	1.14	2	8.9	1.6	40.64	12	53.38	0.062	1.57
0.64	16.256	5800	2.25 57.15	5.8	1.02	2	8.9	1.8	45.72	12	53.38	0.062	1.57
0.64	16.256	5283	3 76.2	3.7	0.65	2	8.9	2.8	71.12	12	53.38	0.062	1.57
0.64	16.256	5543	3.38 85.852	6.1	1.07	3	13.34	2.5	63.5	19	84.51	0.072	1.83
0.64	16.256	5794	3.75 95.25	1.1	0.19	0.9	4	5.9	149.86	7.7	34.25	0.054	1.37
0.64	16.256	5670	3.75 95.25	3.2	0.56	1	4.45	2.9	73.66	10	44.48	0.059	1.5
0.64	16.256	5606	3.81 96.774	10	1.75	6	26.69	2.2	55.88	28	124.54	0.082	2.08
0.64	16.256	5667	3.88 98.552	9.7	1.7	5	22.24	2.2	55.88	26	115.65	0.08	2.03
0.64	16.256	5793	4 101.6	0.99	0.17	0.8	3.56	6.4	162.56	7.2	32.03	0.052	1.32
0.64	16.256	B5-59	4.25 107.95	1.9	0.33	2	8.9	5.4	137.16	12	53.38	0.062	1.57
0.64	16.256	5668	5.75 146.05	5.5	0.96	5	22.24	3.8	96.52	26	115.65	0.08	2.03
0.64	16.256	12343	5.81 147.574	6	1.05	6	26.69	3.8	96.52	28	124.54	0.082	2.08
0.64	16.256	5598	7.75 196.85	3.9	0.68	5	22.24	5.4	137.16	26	115.65	0.08	2.03
0.64	16.256	5825	8.5 215.9	0.43	0.08	1	4.45	17	431.8	8.1	36.03	0.054	1.37
0.64	16.256	12366	9.88 250.952	1.7	0.3	3	13.34	9.3	236.22	19	84.51	0.072	1.83
0.65	16.51	80793	1.5 38.1	13	2.28	0.9	4	0.78	19.812	11	48.93	0.055	1.4
0.65	16.51	80793S	1.5 38.1	11	1.93	0.8	3.56	0.61	15.494	7.8	34.69	0.055	1.4
0.65	16.51	80802	1.5 38.1	25	4.38	1	4.45	0.62	15.748	17	75.62	0.063	1.6
0.65	16.51	80802S	1.5 38.1	21	3.68	1	4.45	0.562	14.275	12.6	56.04	0.0625	1.59
0.65	16.51	80794	1.75 44.45	6.8	1.19	0.9	4	1.5	38.1	11	48.93	0.055	1.4
0.65	16.51	80794S	1.75 44.45	5.8	1.02	0.8	3.56	1.2	30.48	7.8	34.69	0.055	1.4
0.65	16.51	80803	1.75 44.45	13	2.28	1	4.45	1.2	30.48	17	75.62	0.063	1.6
0.65	16.51	80803S	1.75 44.45	11	1.93	1	4.45	0.96	24.384	12.6	56.04	0.0625	1.59
0.65	16.51	80813	1.75 44.45	21	3.68	2	8.9	0.97	24.638	22	97.86	0.069	1.75
0.65	16.51	80813S	1.75 44.45	18	3.15	2	8.9	0.76	19.304	15	66.72	0.069	1.75
0.65	16.51	80795	2 50.8	4.1	0.72	0.9	4	2.5	63.5	11	48.93	0.055	1.4
0.65	16.51	80795S	2 50.8	3.5	0.61	0.8	3.56	2	50.8	7.8	34.69	0.055	1.4
0.65	16.51	80804	2 50.8	8.3	1.45	1	4.45	1.8	45.72	17	75.62	0.063	1.6
0.65	16.51	80804S	2 50.8	7.1	1.24	1	4.45	1.488	37.795	12.6	56.04	0.0625	1.59
0.65	16.51	80814	2 50.8	14	2.45	2	8.9	1.4	35.56	22	97.86	0.069	1.75
0.65	16.51	80814S	2 50.8	12	2.1	2	8.9	1.1	27.94	15	66.72	0.069	1.75
0.65	16.51	80796	2.25 57.15	3.2	0.56	0.9	4	3.3	83.82	11	48.93	0.055	1.4
0.65	16.51	80796S	2.25 57.15	2.7	0.47	0.8	3.56	2.6	66.04	7.8	34.69	0.055	1.4
0.65	16.51	80805	2.25 57.15	6.4	1.12	1	4.45	2.4	60.96	17	75.62	0.063	1.6
0.65	16.51	80805S	2.25 57.15	5.4	0.95	1	4.45	1.956	49.682	12.6	56.04	0.0625	1.59
0.65	16.51	80815	2.25 57.15	11	1.93	2	8.9	1.8	45.72	22	97.86	0.069	1.75
0.65	16.51	80815S	2.25 57.15	9.3	1.63	2	8.9	1.4	35.56	15	66.72	0.069	1.75
0.65	16.51	80797	2.5 63.5	2.6	0.46	0.9	4	4	101.6	11	48.93	0.055	1.4
0.65	16.51	80797S	2.5 63.5	2.2	0.39	0.8	3.56	3.2	81.28	7.8	34.69	0.055	1.4
0.65	16.51	80806	2.5 63.5	5.3	0.93	1	4.45	2.9	73.66	17	75.62	0.063	1.6
0.65	16.51	80806S	2.5 63.5	4.5	0.79	1	4.45	2.347	59.614	12.6	56.04	0.0625	1.59
0.65	16.51	80816	2.5 63.5	8.8	1.54	2	8.9	2.3	58.42	22	97.86	0.069	1.75
0.65	16.51	80816S	2.5 63.5	7.5	1.31	2	8.9	1.8	45.72	15	66.72	0.069	1.75
0.65	16.51	80798	2.75 69.85	2.2	0.39	0.9	4	4.7	119.38	11	48.93	0.055	1.4
0.65	16.51	80798S	2.75 69.85	1.9	0.33	0.8	3.56	3.7	93.98	7.8	34.69	0.055	1.4
0.65	16.51	80807	2.75 69.85	4.4	0.77	1	4.45	3.5	88.9	17	75.62	0.063	1.6
0.65	16.51	80807S	2.75 69.85	3.7	0.65	1	4.45	2.855	72.517	12.6	56.04	0.0625	1.59
0.65	16.51	80817	2.75 69.85	7.4	1.3	2	8.9	2.7	68.58	22	97.86	0.069	1.75
0.65	16.51	80817S	2.75 69.85	6.3	1.1	2	8.9	2.1	53.34	15	66.72	0.069	1.75
0.65	16.51	80799	3 76.2	1.9	0.33	0.9	4	5.5	139.7	11	48.93	0.055	1.4
0.65	16.51	80799S	3 76.2	1.6	0.28	0.8	3.56	4.3	109.22	7.8	34.69	0.055	1.4
0.65	16.51	80808	3 76.2	3.8	0.67	1	4.45	4	101.6	17	75.62	0.063	1.6
0.65	16.51	80808S	3 76.2	3.2	0.56	1	4.45	3.313	84.15	12.6	56.04	0.0625	1.59
0.65	16.51	80818	3 76.2	6.4	1.12	2	8.9	3					




O.D. Inches mm	Century Stock Number	Length Inches mm	Rate Lbs./In. N/mm	Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm	Mat'l	F	E							
									in	sh							
0.65	16.51	8080S	3.5	88.9	1.3	0.23	0.8	3.56	5.5	139.7	7.8	34.69	0.055	1.4	SST	N	FL
0.65	16.51	80809	3.5	88.9	3	0.53	1	4.45	5.1	129.54	17	75.62	0.063	1.6	MW	N	FL
0.65	16.51	80809S	3.5	88.9	2.6	0.46	1	4.45	4.063	103.2	12.6	56.04	0.0625	1.59	SST	N	FL
0.65	16.51	80819	3.5	88.9	5	0.88	2	8.9	4	101.6	22	97.86	0.069	1.75	MW	N	FL
0.65	16.51	80819S	3.5	88.9	4.3	0.75	2	8.9	3.2	81.28	15	66.72	0.069	1.75	SST	N	FL
0.65	16.51	80801	4	101.6	1.2	0.21	0.9	4	8.7	220.98	11	48.93	0.055	1.4	MW	N	FL
0.65	16.51	80801S	4	101.6	1	0.18	0.8	3.56	6.9	175.26	7.8	34.69	0.055	1.4	SST	N	FL
0.65	16.51	80810	4	101.6	2.5	0.44	1	4.45	6.1	154.94	17	75.62	0.063	1.6	MW	N	FL
0.65	16.51	80810S	4	101.6	2.1	0.37	1	4.45	5.03	127.762	12.6	56.04	0.0625	1.59	SST	N	FL
0.65	16.51	80820	4	101.6	4.1	0.72	2	8.9	4.9	124.46	22	97.86	0.069	1.75	MW	N	FL
0.65	16.51	80820S	4	101.6	3.5	0.61	2	8.9	3.8	96.52	15	66.72	0.069	1.75	SST	N	FL
0.65	16.51	80811	4.5	114.3	2.1	0.37	1	4.45	7.3	185.42	17	75.62	0.063	1.6	MW	N	FL
0.65	16.51	80811S	4.5	114.3	1.8	0.32	1	4.45	5.924	150.47	12.6	56.04	0.0625	1.59	SST	N	FL
0.65	16.51	80821	4.5	114.3	3.5	0.61	2	8.9	5.7	144.78	22	97.86	0.069	1.75	MW	N	FL
0.65	16.51	80821S	4.5	114.3	3	0.53	2	8.9	4.5	114.3	15	66.72	0.069	1.75	SST	N	FL
0.65	16.51	80812	5	127	1.9	0.33	1	4.45	8	203.2	17	75.62	0.063	1.6	MW	N	FL
0.65	16.51	80812S	5	127	1.6	0.28	1	4.45	6.626	168.3	12.6	56.04	0.0625	1.59	SST	N	FL
0.65	16.51	80822	5	127	3	0.53	2	8.9	6.7	170.18	22	97.86	0.069	1.75	MW	N	FL
0.65	16.51	80822S	5	127	2.6	0.46	2	8.9	5.3	134.62	15	66.72	0.069	1.75	SST	N	FL
0.656	16.662	5787	0.66	16.764	2.5	0.44	0.9	4	2.6	66.04	7.4	32.92	0.054	1.37	SST	N	FL
0.656	16.662	494	1.72	43.688	17	2.98	3	13.34	0.89	22.606	18	80.06	0.072	1.83	SPR	Z	MH
0.656	16.662	B1-56	2	50.8	6.9	1.21	2	8.9	1.61	40.894	12.5	55.6	0.0625	1.59	SST	N	FL
0.656	16.662	6025	2.25	57.15	1.9	0.33	0.9	4	3.6	91.44	7.9	35.14	0.055	1.4	SST	N	FL
0.656	16.662	5883	2.5	63.5	1.9	0.33	1	4.45	3.9	99.06	8.3	36.92	0.055	1.4	SPR	Z	MH
0.656	16.662	5329	2.5	63.5	4.7	0.82	2	8.9	2.2	55.88	12	53.38	0.062	1.57	SPR	Z	MH
0.656	16.662	5296	2.75	69.85	2.1	0.37	1	4.45	3.6	91.44	8.3	36.92	0.055	1.4	SPR	Z	MH
0.656	16.662	6026	2.75	69.85	1.5	0.26	0.9	4	4.7	119.38	7.9	35.14	0.055	1.4	SST	N	FL
0.656	16.662	5801	2.75	69.85	3.9	0.68	2	8.9	2.6	66.04	12	53.38	0.062	1.57	SPR	Z	FL
0.656	16.662	5781	2.88	73.152	4	0.7	2	8.9	2.8	71.12	13	57.82	0.064	1.63	SPR	GI	MH
0.656	16.662	5790	3	76.2	1.5	0.26	0.9	4	4.4	111.76	7.4	32.92	0.054	1.37	SST	N	FL
0.656	16.662	S-637	3	76.2	2.9	0.51	2	8.9	3.738	94.945	12.5	55.6	0.0625	1.59	SST	N	MH
0.656	16.662	5803	3.25	82.55	2.4	0.42	2	8.9	4.371	111.023	11	48.93	0.062	1.57	SST	N	MH
0.656	16.662	B18-184	3.47	88.138	3.9	0.68	3	13.34	3.4	86.36	16	71.17	0.07	1.78	SST	N	FL
0.656	16.662	B5-29	3.5	88.9	1.1	0.19	0.9	4	6.4	162.56	7.9	35.14	0.054	1.37	SPR	Z	MH
0.656	16.662	5797	3.5	88.9	3.6	0.63	2	8.9	2.8	71.12	12	53.38	0.062	1.57	SPR	Z	FL
0.656	16.662	B6-69	3.53	89.662	2.1	0.37	2	8.9	4.8	121.92	11	48.93	0.061	1.55	SPR	GI	MH
0.656	16.662	5474	4	101.6	1	0.18	0.9	4	6.8	172.72	7.9	35.14	0.054	1.37	SPR	Z	MH
0.656	16.662	5802	4.25	107.95	2	0.35	2	8.9	5.1	129.54	12	53.38	0.062	1.57	SPR	GI	MH
0.656	16.662	5791	4.5	114.3	1.9	0.33	2	8.9	5.5	139.7	12	53.38	0.062	1.57	SPR	GI	FL
0.656	16.662	12353	5.5	139.7	1.6	0.28	2	8.9	7.2	182.88	13	57.82	0.064	1.63	SPR	Z	MH
0.687	17.45	555	1.69	42.926	23	4.03	4	17.79	0.86	21.844	24	106.75	0.08	2.03	HD	Z	MH
0.687	17.45	S-601	1.75	44.45	11	1.93	3	13.34	1.2	30.48	16	71.17	0.072	1.83	SST	N	MH
0.687	17.45	5675	2.56	65.024	55	9.63	14	62.27	0.74	18.796	55	244.64	0.105	2.67	SPR	Z	MH
0.687	17.45	5374	3.5	88.9	11	1.93	4	17.79	1.7	43.18	24	106.75	0.08	2.03	SPR	Z	MH
0.687	17.45	5159	4	101.6	31	5.43	14	62.27	1.3	33.02	55	244.64	0.105	2.67	HD	Z	MH
0.687	17.45	232	4.25	107.95	26	4.55	14	62.27	1.5	38.1	55	244.64	0.105	2.67	HD	Z	MH
0.687	17.45	93	4.75	120.65	11	1.93	8	35.58	2.5	63.5	35	155.68	0.091	2.31	HD	Z	MH
0.687	17.45	96	5	127	2.9	0.51	3	13.34	5	127	17	75.62	0.072	1.83	HD	Z	MH
0.687	17.45	5505	5.38	136.652	5	0.88	4	17.79	3.9	99.06	24	106.75	0.08	2.03	SPR	Z	MH
0.687	17.45	5508	5.5	139.7	5	0.88	4	17.79	3.9	99.06	24	106.75	0.08	2.03	HD	Z	MH
0.687	17.45	97	5.5	139.7	4.5	0.79	4	17.79	4.4	111.76	24	106.75	0.08	2.03	HD	Z	MH
0.687	17.45	5577	5.56	141.224	0.22	0.04	0.4	1.78	20	508	4.6	20.46	0.045	1.14	SPR	Z	MH
0.687	17.45	5587	5.63	143.002	5.2	0.91	5	22.24	4	101.6	26	115.65	0.082	2.08	SPR	Z	MH
0.687	17.45	5635	7.13	181.102	23	4.03	19	84.51	2.1	53.34	68	302.46	0.113	2.87	SPR	Z	MH
0.687	17.45	5554	7.25	184.15	15	2.63	14	62.27	2.8	71.12	55	244.64	0.105	2.67	SPR	Z	MH
0.687	17.45	130	8.5	215.9	0.71	0.12	1	4.45	14	355.6	11	48.93	0.062	1.57	HD	Z	MH
0.687	17.45	5614	9.25	234.95	4.7	0.82	4	17.79	3.7	93.98	21	93.41	0.077	1.96	SPR	BO	EH
0.703	17.856	5488	1.91	48.514	167	29.23	24	106.75	0.34	8.636	80	355.84	0.12	3.05	SPR	N	MH
0.703	17.856	12339	2.63	66.802	53	9.28	15	66.72	0.81	20.574	58	257.98	0.108	2.74	SPR	Z	MH
0.703	17.856	5708	4.09	103.886	14	2.45	8	35.58	2	50.8	35	155.68	0.092	2.34	SPR	Z	FL
0.718	18.237	5842	1.38	35.052	44	7.7	6	26.69	0.55	13.97	30	133.44	0.087	2.21	SPR	Z	MH
0.718	18.237	5679	1.5	38.1	126	22.05	13	57.82	0.31	7.874	52	231.3	0.105	2.67	SPR	Z	MH
0.718	18.237	542	2	50.8	15	2.63	4	17.79	1.2	30.48	23	102.3	0.08	2.03	HD	Z	MH
0.718	18.237	5641	2.56	65.024	109	19.08	24	106.75	0.53	13.462	82	364.74	0.122	3.1	SPR	Z	MH
0.718	18.237	471	2.75	69.85	7.6	1.33	3	13.34	2.1	53.34	19	84.51	0.076	1.93	SPR	Z	MH
0.718	18.237	5696	2.94	74.676	28	4.9	9	40.03	1.2	30.48	42	186.82	0.098	2.49	SPR	N	MH
0.718	18.237	5674	3.19	81.026	72	12.6	23	102.3	0.76	19.304	78	346.94	0.12	3.05	SPR	Z	MH
0.718	18.237	12390	3.19	8													

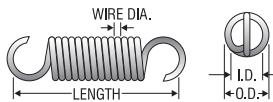


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm		Rate Lbs./In. N/mm		Initial Tension Lbs. N		Sugg Max. Defl. Inches mm		Sugg Max. load Lbs. N		Wire Dia. Inches mm		Mat'l	F nsh Ends	
		Inches	mm			Lbs.	N	Inches	mm	Lbs.	N	Inches	mm			
0.734	18.644	5351	4.94	125.476	3.1	0.54	3	13.34	4.9	124.46	18	80.06	0.075	1.91	SPR	Z MH
0.734	18.644	5602	5.75	146.05	7.6	1.33	7	31.14	3.5	88.9	33	146.78	0.092	2.34	HD	Z MH
0.734	18.644	5595	7.88	200.152	5.2	0.91	7	31.14	5.2	132.08	33	146.78	0.092	2.34	HD	Z MH
0.734	18.644	12383	8	203.2	7	1.23	9	40.03	4.6	116.84	41	182.37	0.098	2.49	SPR	Z MH
0.75	19.05	5035	1.5	38.1	100	17.5	11	48.93	0.38	9.652	50	222.4	0.105	2.67	HD	Z MH
0.75	19.05	ZZ2-62	1.88	47.752	11	1.93	3	13.34	1.4	35.56	18	80.06	0.075	1.91	SPR	Z MH
0.75	19.05	5167	1.88	47.752	65	11.38	11	48.93	0.59	14.986	50	222.4	0.105	2.67	HD	Z MH
0.75	19.05	80823	2	50.8	2.3	0.4	0.6	2.67	3	76.2	7.6	33.8	0.049	1.24	MW	N FL
0.75	19.05	80823S	2	50.8	2	0.35	0.5	2.22	2.4	60.96	5.2	23.13	0.049	1.24	SST	N FL
0.75	19.05	5379	2	50.8	3	0.53	0.7	3.11	2	50.8	6.8	30.25	0.054	1.37	SPR	Z FL
0.75	19.05	80830	2	50.8	3.4	0.6	0.8	3.56	2.7	68.58	9.9	44.04	0.055	1.4	MW	N FL
0.75	19.05	80830S	2	50.8	2.8	0.49	0.7	3.11	2.1	53.34	6.8	30.25	0.055	1.4	SST	N FL
0.75	19.05	5445	2	50.8	5.9	1.03	1	4.45	1.6	40.64	10	44.48	0.062	1.57	SPR	Z MH
0.75	19.05	80836	2	50.8	6.6	1.16	1	4.45	2.1	53.34	15	66.72	0.063	1.6	MW	N FL
0.75	19.05	5884	2	50.8	3.8	0.67	1	4.45	2.6	66.04	11	48.93	0.063	1.6	SPR	Z FL
0.75	19.05	6027	2	50.8	3.4	0.6	1	4.45	2.92	74.168	10	44.48	0.063	1.6	SST	N FL
0.75	19.05	80846	2	50.8	11	1.93	2	8.9	1.6	40.64	19	84.51	0.069	1.75	MW	N FL
0.75	19.05	80846S	2	50.8	9.5	1.66	1	4.45	1.2	30.48	13	57.82	0.069	1.75	SST	N FL
0.75	19.05	80856	2	50.8	16	2.8	2	8.9	1.3	33.02	23	102.3	0.075	1.91	MW	N FL
0.75	19.05	80856S	2	50.8	14	2.45	2	8.9	1	25.4	16	71.17	0.075	1.91	SST	N FL
0.75	19.05	6030	2	50.8	8.4	1.47	3	13.34	1.7	43.18	17	75.62	0.075	1.91	SST	N FL
0.75	19.05	80867	2	50.8	33	5.78	3	13.34	0.94	23.876	34	151.23	0.085	2.16	MW	N FL
0.75	19.05	80867S	2	50.8	28	4.9	2	8.9	0.73	18.542	23	102.3	0.085	2.16	SST	N FL
0.75	19.05	5325	2	50.8	31	5.43	6	26.69	0.81	20.574	31	137.89	0.091	2.31	SPR	Z MH
0.75	19.05	80876	2	50.8	46	8.05	4	17.79	0.84	21.336	42	186.82	0.093	2.36	MW	N FL
0.75	19.05	80876S	2	50.8	39	6.83	3	13.34	0.65	16.51	28	124.54	0.093	2.36	SST	N FL
0.75	19.05	80885	2	50.8	60	10.5	4	17.79	0.69	17.526	44	195.71	0.095	2.41	MW	N FL
0.75	19.05	80885S	2	50.8	51	8.93	3	13.34	0.53	13.462	30	133.44	0.095	2.41	SST	N FL
0.75	19.05	80896	2	50.8	92	16.1	5	22.24	0.59	14.986	60	266.88	0.105	2.67	MW	N FL
0.75	19.05	80896S	2	50.8	78	13.65	5	22.24	0.46	11.684	40	177.92	0.105	2.67	SST	N FL
0.75	19.05	80905	2	50.8	151	26.43	6	26.69	0.44	11.176	73	324.7	0.115	2.92	MW	N FL
0.75	19.05	80905S	2	50.8	128	22.4	5	22.24	0.34	8.636	48	213.5	0.115	2.92	SST	N FL
0.75	19.05	80916	2	50.8	240	42	19	84.51	0.3	7.62	91	404.77	0.125	3.18	MW	N FL
0.75	19.05	80916S	2	50.8	204	35.7	7	31.14	0.27	6.858	61	271.33	0.125	3.18	SST	N FL
0.75	19.05	B6-52	2.03	51.562	11	1.93	3	13.34	1.5	38.1	19	84.51	0.077	1.96	SPR	N MH
0.75	19.05	5097	2.17	55.118	12	2.1	4	17.79	1.6	40.64	22	97.86	0.08	2.03	HD	Z MH
0.75	19.05	80824	2.25	57.15	1.5	0.26	0.6	2.67	4.7	119.38	7.6	33.8	0.049	1.24	MW	N FL
0.75	19.05	80824S	2.25	57.15	1.3	0.23	0.5	2.22	3.7	93.98	5.2	23.13	0.049	1.24	SST	N FL
0.75	19.05	80831	2.25	57.15	2.5	0.44	0.8	3.56	3.7	93.98	9.9	44.04	0.055	1.4	MW	N FL
0.75	19.05	80831S	2.25	57.15	2.1	0.37	0.7	3.11	2.9	73.66	6.8	30.25	0.055	1.4	SST	N FL
0.75	19.05	80837	2.25	57.15	4.9	0.86	1	4.45	2.8	71.12	15	66.72	0.063	1.6	MW	N FL
0.75	19.05	80837S	2.25	57.15	4.1	0.72	1	4.45	2.323	59.004	11	48.93	0.0625	1.59	SST	N FL
0.75	19.05	80847	2.25	57.15	8.1	1.42	2	8.9	2.2	55.88	19	84.51	0.069	1.75	MW	N FL
0.75	19.05	80847S	2.25	57.15	6.9	1.21	1	4.45	1.7	43.18	13	57.82	0.069	1.75	SST	N FL
0.75	19.05	80857	2.25	57.15	12	2.1	2	8.9	1.8	45.72	23	102.3	0.075	1.91	MW	N FL
0.75	19.05	80857S	2.25	57.15	10	1.75	2	8.9	1.4	35.56	16	71.17	0.075	1.91	SST	N FL
0.75	19.05	5890	2.25	57.15	7.8	1.37	3	13.34	1.9	48.26	18	80.06	0.075	1.91	SPR	Z FL
0.75	19.05	80868	2.25	57.15	24	4.2	3	13.34	1.3	33.02	34	151.23	0.085	2.16	MW	N FL
0.75	19.05	80868S	2.25	57.15	20	3.5	2	8.9	1	25.4	23	102.3	0.085	2.16	SST	N FL
0.75	19.05	80877	2.25	57.15	35	6.13	4	17.79	1.1	27.94	42	186.82	0.093	2.36	MW	N FL
0.75	19.05	80877S	2.25	57.15	30	5.25	3	13.34	0.84	21.336	28	124.54	0.093	2.36	SST	N FL
0.75	19.05	80886	2.25	57.15	44	7.7	4	17.79	0.93	23.622	44	195.71	0.095	2.41	MW	N FL
0.75	19.05	80886S	2.25	57.15	37	6.48	3	13.34	0.71	18.034	30	133.44	0.095	2.41	SST	N FL
0.75	19.05	80897	2.25	57.15	68	11.9	5	22.24	0.8	20.32	60	266.88	0.105	2.67	MW	N FL
0.75	19.05	80897S	2.25	57.15	58	10.15	5	22.24	0.62	15.748	40	177.92	0.105	2.67	SST	N FL
0.75	19.05	80906	2.25	57.15	116	20.3	6	26.69	0.58	14.732	73	324.7	0.115	2.92	MW	N FL
0.75	19.05	80906S	2.25	57.15	98	17.15	5	22.24	0.44	11.176	48	213.5	0.115	2.92	SST	N FL
0.75	19.05	80917	2.25	57.15	180	31.5	8	35.58	0.48	12.192	93	413.66	0.125	3.18	MW	N FL
0.75	19.05	80917S	2.25	57.15	153	26.78	7	31.14	0.36	9.144	61	271.33	0.125	3.18	SST	N FL
0.75	19.05	5457	2.28	57.912	9.2	1.61	2	8.9	1.4	35.56	16	71.17	0.072	1.83	SPR	Z MH
0.75	19.05	5885	2.38	60.452	2.9	0.51	1	4.45	3.4	86.36	11	48.93	0.063	1.6	SPR	Z FL
0.75	19.05	12368	2.38	60.452	43	7.53	11	48.93	0.89	22.606	50	222.4	0.105	2.67	SPR	N MH
0.75	19.05	5824	2.41	61.214	47	8.23	11	48.93	0.82	20.828	50	222.4	0.105	2.67	HD	Z MH
0.75	19.05	5808	2.44	61.976	1.3	0.23	0.6	2.67	4	101.6	5.7	25.35	0.052	1.32	SST	N MH
0.75	19.05	430	2.44	61.976	6.2	1.09	2	8.9	2.1	53.34	16	71.17	0.072	1.83	SPR	Z FL
0.75	19.05	540	2.45	62.23	10	1.75	4	17.79	1.8	45.72	22	97.86	0.08	2.03	HD	Z FL
0.75	19.05	80825	2.5	63.5	1.2	0.21	0.6	2.67	5.8	147.32	7.6	33.8	0.049	1.24	SST	N FL
0.75	19.05	80825S	2.5	63.5	1	0.18	0.5	2.22	4.6	116.84	5.2	23.13	0.049	1.24	SST	N FL
0.75	19.05	80832	2.5	63.5	2	0.35	0.8	3.56	4.7	119.38	9.9	44.04	0.055	1.4	MW	N FL
0.75	19.05	80832S	2.													




O.D. Inches mm	Century Stock Number	Length Inches mm	Rate Lbs./In. N/mm	Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm	Mat'l	F	E							
									n	s							
0.75	19.05	80869S	2.5	63.5	16	2.8	2	8.9	1.3	33.02	23	102.3	0.085	2.16	SST	N	FL
0.75	19.05	S-602	2.5	63.5	17	2.98	6	26.69	1.4	35.56	29	128.99	0.091	2.31	SST	N	MH
0.75	19.05	80878	2.5	63.5	28	4.9	4	17.79	1.4	35.56	42	186.82	0.093	2.36	MW	N	FL
0.75	19.05	80878S	2.5	63.5	23	4.03	3	13.34	1.1	27.94	28	124.54	0.093	2.36	SST	N	FL
0.75	19.05	80887	2.5	63.5	33	5.78	4	17.79	1.2	30.48	44	195.71	0.095	2.41	MW	N	FL
0.75	19.05	80887S	2.5	63.5	28	4.9	3	13.34	0.94	23.876	30	133.44	0.095	2.41	SST	N	FL
0.75	19.05	80898	2.5	63.5	54	9.45	5	22.24	1	25.4	60	266.88	0.105	2.67	MW	N	FL
0.75	19.05	80898S	2.5	63.5	46	8.05	5	22.24	0.77	19.558	40	177.92	0.105	2.67	SST	N	FL
0.75	19.05	80907	2.5	63.5	89	15.58	6	26.69	0.75	19.05	73	324.7	0.115	2.92	MW	N	FL
0.75	19.05	80907S	2.5	63.5	76	13.3	5	22.24	0.57	14.478	48	213.5	0.115	2.92	SST	N	FL
0.75	19.05	80918	2.5	63.5	144	25.2	8	35.58	0.59	14.986	93	413.66	0.125	3.18	MW	N	FL
0.75	19.05	80918S	2.5	63.5	122	21.35	7	31.14	0.45	11.43	61	271.33	0.125	3.18	SST	N	FL
0.75	19.05	12398	2.59	65.786	38	6.65	11	48.93	1	25.4	50	222.4	0.105	2.67	SPR	Z	MH
0.75	19.05	80826	2.75	69.85	0.9	0.16	0.6	2.67	7.8	198.12	7.6	33.8	0.049	1.24	MW	N	FL
0.75	19.05	80826S	2.75	69.85	0.77	0.13	0.5	2.22	6.2	157.48	5.2	23.13	0.049	1.24	SST	N	FL
0.75	19.05	80833	2.75	69.85	1.6	0.28	0.8	3.56	5.9	149.86	9.9	44.04	0.055	1.4	MW	N	FL
0.75	19.05	80833S	2.75	69.85	1.3	0.23	0.7	3.11	4.6	116.84	6.8	30.25	0.055	1.4	SST	N	FL
0.75	19.05	80839	2.75	69.85	3.2	0.56	1	4.45	4.2	106.68	15	66.72	0.063	1.6	MW	N	FL
0.75	19.05	80839S	2.75	69.85	2.7	0.47	1	4.45	3.527	89.586	11	48.93	0.0625	1.59	SST	N	FL
0.75	19.05	80849	2.75	69.85	5.2	0.91	2	8.9	3.3	83.82	19	84.51	0.069	1.75	MW	N	FL
0.75	19.05	80849S	2.75	69.85	4.4	0.77	1	4.45	2.6	66.04	13	57.82	0.069	1.75	SST	N	FL
0.75	19.05	80859	2.75	69.85	7.9	1.38	2	8.9	2.7	68.58	23	102.3	0.075	1.91	MW	N	FL
0.75	19.05	5891	2.75	69.85	5.8	1.02	3	13.34	2.6	66.04	18	80.06	0.075	1.91	SPR	Z	FL
0.75	19.05	6031	2.75	69.85	5.1	0.89	3	13.34	2.8	71.12	17	75.62	0.075	1.91	SST	N	MH
0.75	19.05	80870	2.75	69.85	15	2.63	3	13.34	2	50.8	34	151.23	0.085	2.16	MW	N	FL
0.75	19.05	80870S	2.75	69.85	13	2.28	2	8.9	1.6	40.64	23	102.3	0.085	2.16	SST	N	FL
0.75	19.05	320	2.75	69.85	21	3.68	6	26.69	1.2	30.48	31	137.89	0.091	2.31	HD	Z	MH
0.75	19.05	80879	2.75	69.85	24	4.2	4	17.79	1.6	40.64	42	186.82	0.093	2.36	MW	N	FL
0.75	19.05	80879S	2.75	69.85	20	3.5	3	13.34	1.3	33.02	28	124.54	0.093	2.36	SST	N	FL
0.75	19.05	80888	2.75	69.85	28	4.9	4	17.79	1.5	38.1	44	195.71	0.095	2.41	MW	N	FL
0.75	19.05	80888S	2.75	69.85	24	4.2	3	13.34	1.1	27.94	30	133.44	0.095	2.41	SST	N	FL
0.75	19.05	80899	2.75	69.85	45	7.88	5	22.24	1.2	30.48	60	266.88	0.105	2.67	MW	N	FL
0.75	19.05	80899S	2.75	69.85	38	6.65	5	22.24	0.93	23.622	40	177.92	0.105	2.67	SST	N	FL
0.75	19.05	80908	2.75	69.85	76	13.3	6	26.69	0.89	22.606	73	324.7	0.115	2.92	MW	N	FL
0.75	19.05	80908S	2.75	69.85	64	11.2	5	22.24	0.67	17.018	48	213.5	0.115	2.92	SST	N	FL
0.75	19.05	195	2.75	69.85	81	14.18	21	93.41	0.66	16.764	74	329.15	0.12	3.05	HD	Z	MH
0.75	19.05	80919	2.75	69.85	120	21	8	35.58	0.71	18.034	93	413.66	0.125	3.18	MW	N	FL
0.75	19.05	80919S	2.75	69.85	102	17.85	7	31.14	0.54	13.716	61	271.33	0.125	3.18	SST	N	FL
0.75	19.05	S-632	2.88	73.152	0.65	0.11	0.5	2.22	7.5	190.5	5.4	24.02	0.051	1.3	SST	N	MH
0.75	19.05	80827	3	76.2	0.8	0.14	0.6	2.67	8.8	223.52	7.6	33.8	0.049	1.24	MW	N	FL
0.75	19.05	80827S	3	76.2	0.68	0.12	0.5	2.22	6.9	175.26	5.2	23.13	0.049	1.24	SST	N	FL
0.75	19.05	5807	3	76.2	1	0.18	0.7	3.11	5.6	142.24	6.4	28.47	0.054	1.37	SST	N	MH
0.75	19.05	80834	3	76.2	1.4	0.25	0.8	3.56	6.7	170.18	9.9	44.04	0.055	1.4	MW	N	FL
0.75	19.05	80834S	3	76.2	1.1	0.19	0.7	3.11	5.3	134.62	6.8	30.25	0.055	1.4	SST	N	FL
0.75	19.05	80840	3	76.2	2.7	0.47	1	4.45	5.1	129.54	15	66.72	0.063	1.6	MW	N	FL
0.75	19.05	80840S	3	76.2	2.3	0.4	1	4.45	4.14	105.156	11	48.93	0.0625	1.59	SST	N	FL
0.75	19.05	5940	3	76.2	2	0.35	1	4.45	4.7	119.38	11	48.93	0.063	1.6	SPR	Z	FL
0.75	19.05	80850	3	76.2	4.4	0.77	2	8.9	4	101.6	19	84.51	0.069	1.75	MW	N	FL
0.75	19.05	80850S	3	76.2	3.7	0.65	1	4.45	3.1	78.74	13	57.82	0.069	1.75	SST	N	FL
0.75	19.05	80860	3	76.2	6.7	1.17	2	8.9	3.2	81.28	23	102.3	0.075	1.91	MW	N	FL
0.75	19.05	80860S	3	76.2	5.7	1	2	8.9	2.5	63.5	16	71.17	0.075	1.91	SST	N	FL
0.75	19.05	80871	3	76.2	13	2.28	3	13.34	2.3	58.42	34	151.23	0.085	2.16	MW	N	FL
0.75	19.05	80871S	3	76.2	11	1.93	2	8.9	1.8	45.72	23	102.3	0.085	2.16	SST	N	FL
0.75	19.05	S-603	3	76.2	13	2.28	6	26.69	1.8	45.72	29	128.99	0.091	2.31	SST	N	MH
0.75	19.05	80880	3	76.2	20	3.5	4	17.79	1.9	48.26	42	186.82	0.093	2.36	MW	N	FL
0.75	19.05	80880S	3	76.2	17	2.98	3	13.34	1.4	35.56	28	124.54	0.093	2.36	SST	N	FL
0.75	19.05	80889	3	76.2	24	4.2	4	17.79	1.7	43.18	44	195.71	0.095	2.41	MW	N	FL
0.75	19.05	80889S	3	76.2	20	3.5	3	13.34	1.3	33.02	30	133.44	0.095	2.41	SST	N	FL
0.75	19.05	80900	3	76.2	39	6.83	5	22.24	1.4	35.56	60	266.88	0.105	2.67	MW	N	FL
0.75	19.05	80900S	3	76.2	33	5.78	5	22.24	1.1	27.94	40	177.92	0.105	2.67	SST	N	FL
0.75	19.05	80909	3	76.2	66	11.55	6	26.69	1	25.4	73	324.7	0.115	2.92	MW	N	FL
0.75	19.05	80909S	3	76.2	56	9.8	5	22.24	0.77	19.558	48	213.5	0.115	2.92	SST	N	FL
0.75	19.05	80920	3	76.2	103	18.03	8	35.58	0.83	21.082	93	413.66	0.125	3.18	MW	N	FL
0.75	19.05	80920S	3	76.2	87	15.23	7	31.14	0.63	16.002	61	271.33	0.125	3.18	SST	N	FL
0.75	19.05	89	3.13	79.502	33	5.78	11	48.93	1.2	30.48	50	222.4	0.105	2.67	HD	Z	MH
0.75	19.05	80828	3.25	82.55	0.7	0.12	0.6	2.67	10	254	7.6	33.8	0.049	1.24	MW	N	FL
0.75	19.05	80828S	3.25	82.55	0.6	0.11	0.5	2.22	7.9	200.66	5.2	23.13	0.049	1.24	SST	N	FL
0.75	19.05	B-533	3.25	82.55	1.7	0.3	1	4.45	5.5	139.7	10	44.48	0.062	1.			

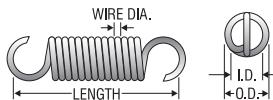


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm		Rate Lbs./In. N/mm		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm		Mat'l	F nsh s					
		Inches	mm	Lbs./In.	N/mm				Inches	mm							
0.75	19.05	80851	3.5	88.9	3.4	0.6	2	8.9	5.2	132.08	19	84.51	0.069	1.75	MW	N	FL
0.75	19.05	80851S	3.5	88.9	2.9	0.51	1	4.45	4.1	104.14	13	57.82	0.069	1.75	SST	N	FL
0.75	19.05	80861	3.5	88.9	5.2	0.91	2	8.9	4.1	104.14	23	102.3	0.075	1.91	MW	N	FL
0.75	19.05	6032	3.5	88.9	3.7	0.65	3	13.34	3.8	96.52	17	75.62	0.075	1.91	SST	N	FL
0.75	19.05	80872	3.5	88.9	10	1.75	3	13.34	3.1	78.74	34	151.23	0.085	2.16	MW	N	FL
0.75	19.05	80872S	3.5	88.9	8.5	1.49	2	8.9	2.4	60.96	23	102.3	0.085	2.16	SST	N	FL
0.75	19.05	80881	3.5	88.9	16	2.8	4	17.79	2.4	60.96	42	186.82	0.093	2.36	MW	N	FL
0.75	19.05	80881S	3.5	88.9	13	2.28	3	13.34	1.9	48.26	28	124.54	0.093	2.36	SST	N	FL
0.75	19.05	80890	3.5	88.9	18	3.15	4	17.79	2.3	58.42	44	195.71	0.095	2.41	MW	N	FL
0.75	19.05	80890S	3.5	88.9	15	2.63	3	13.34	1.7	43.18	30	133.44	0.095	2.41	SST	N	FL
0.75	19.05	80901	3.5	88.9	30	5.25	5	22.24	1.8	45.72	60	266.88	0.105	2.67	MW	N	FL
0.75	19.05	80901S	3.5	88.9	26	4.55	5	22.24	1.4	35.56	40	177.92	0.105	2.67	SST	N	FL
0.75	19.05	80910	3.5	88.9	50	8.75	6	26.69	1.3	33.02	73	324.7	0.115	2.92	MW	N	FL
0.75	19.05	80910S	3.5	88.9	43	7.53	5	22.24	1	25.4	48	213.5	0.115	2.92	SST	N	FL
0.75	19.05	80921	3.5	88.9	80	14	8	35.58	1.1	27.94	93	413.66	0.125	3.18	MW	N	FL
0.75	19.05	80921S	3.5	88.9	68	11.9	7	31.14	0.81	20.574	61	271.33	0.125	3.18	SST	N	FL
0.75	19.05	633	3.5	88.9	107	18.73	34	151.23	0.68	17.272	107	475.94	0.135	3.43	HD	Z	MH
0.75	19.05	5942	3.75	95.25	3.8	0.67	3	13.34	3.9	99.06	18	80.06	0.075	1.91	SPR	Z	FL
0.75	19.05	5605	3.75	95.25	11	1.93	6	26.69	2.3	58.42	33	146.78	0.092	2.34	HD	Z	MH
0.75	19.05	5630	3.75	95.25	28	4.9	11	48.93	1.4	35.56	50	222.4	0.105	2.67	SPR	Z	SH
0.75	19.05	77	3.75	95.25	26	4.55	11	48.93	1.5	38.1	50	222.4	0.105	2.67	HD	Z	MH
0.75	19.05	B9-3	3.91	99.314	1.3	0.23	1	4.45	7	177.8	10	44.48	0.062	1.57	SPR	Z	FL
0.75	19.05	80842	4	101.6	1.7	0.3	1	4.45	8	203.2	15	66.72	0.063	1.6	MW	N	FL
0.75	19.05	80842S	4	101.6	1.4	0.25	1	4.45	6.802	172.771	11	48.93	0.0625	1.59	SST	N	FL
0.75	19.05	5888	4	101.6	1.4	0.25	1	4.45	6.9	175.26	11	48.93	0.063	1.6	SPR	Z	FL
0.75	19.05	6060	4	101.6	1.6	0.28	1	4.45	8.3	210.82	15	66.72	0.063	1.6	MW	GI	FL
0.75	19.05	80852	4	101.6	2.8	0.49	2	8.9	6.3	160.02	19	84.51	0.069	1.75	MW	N	FL
0.75	19.05	80852S	4	101.6	2.4	0.42	1	4.45	5	127	13	57.82	0.069	1.75	SST	N	FL
0.75	19.05	80862	4	101.6	4.3	0.75	2	8.9	5	127	23	102.3	0.075	1.91	MW	N	FL
0.75	19.05	6033	4	101.6	3.1	0.54	3	13.34	4.5	114.3	17	75.62	0.075	1.91	SST	N	FL
0.75	19.05	192	4	101.6	5.2	0.91	4	17.79	3.5	88.9	22	97.86	0.08	2.03	HD	Z	MH
0.75	19.05	80873	4	101.6	8.2	1.44	3	13.34	3.7	93.98	34	151.23	0.085	2.16	MW	N	FL
0.75	19.05	80873S	4	101.6	7	1.23	2	8.9	2.9	73.66	23	102.3	0.085	2.16	SST	N	FL
0.75	19.05	80882	4	101.6	13	2.28	4	17.79	3	76.2	42	186.82	0.093	2.36	MW	N	FL
0.75	19.05	80882S	4	101.6	11	1.93	3	13.34	2.3	58.42	28	124.54	0.093	2.36	SST	N	FL
0.75	19.05	80891	4	101.6	15	2.63	4	17.79	2.7	68.58	44	195.71	0.095	2.41	MW	N	FL
0.75	19.05	80891S	4	101.6	13	2.28	3	13.34	2.1	53.34	30	133.44	0.095	2.41	SST	N	FL
0.75	19.05	80902	4	101.6	25	4.38	5	22.24	2.2	55.88	60	266.88	0.105	2.67	MW	N	FL
0.75	19.05	80902S	4	101.6	21	3.68	5	22.24	1.7	43.18	40	177.92	0.105	2.67	SST	N	FL
0.75	19.05	5826	4	101.6	24	4.2	11	48.93	1.6	40.64	50	222.4	0.105	2.67	HD	Z	MH
0.75	19.05	80911	4	101.6	41	7.18	6	26.69	1.6	40.64	73	324.7	0.115	2.92	MW	N	FL
0.75	19.05	80911S	4	101.6	35	6.13	5	22.24	1.2	30.48	48	213.5	0.115	2.92	SST	N	FL
0.75	19.05	80922	4	101.6	65	11.38	8	35.58	1.3	33.02	93	413.66	0.125	3.18	MW	N	FL
0.75	19.05	80922S	4	101.6	56	9.8	7	31.14	0.99	25.146	61	271.33	0.125	3.18	SST	N	FL
0.75	19.05	5292	4.06	103.124	59	10.33	25	111.2	1	25.4	84	373.63	0.125	3.18	SPR	Z	MH
0.75	19.05	5019	4.19	106.426	3.1	0.54	2	8.9	4.3	109.22	16	71.17	0.072	1.83	HD	Z	MH
0.75	19.05	5892	4.22	107.188	3.3	0.58	3	13.34	4.6	116.84	18	80.06	0.075	1.91	SPR	Z	FL
0.75	19.05	6029	4.25	107.95	1.1	0.19	1	4.45	7.868	199.847	10	44.48	0.063	1.6	SST	N	FL
0.75	19.05	6034	4.25	107.95	2.9	0.51	3	13.34	4.9	124.46	17	75.62	0.075	1.91	SST	N	MH
0.75	19.05	S-604	4.25	107.95	8.1	1.42	6	26.69	2.9	73.66	29	128.99	0.091	2.31	SST	N	MH
0.75	19.05	5941	4.38	111.252	3.1	0.54	3	13.34	4.8	121.92	18	80.06	0.075	1.91	SPR	Z	FL
0.75	19.05	12356	4.38	111.252	12	2.1	8	35.58	2.5	63.5	37	164.58	0.096	2.44	SPR	Z	MH
0.75	19.05	5889	4.41	112.014	1.3	0.23	1	4.45	7.6	193.04	12	53.38	0.064	1.63	SPR	Z	FL
0.75	19.05	5341	4.44	112.776	1.2	0.21	1	4.45	7.8	198.12	10	44.48	0.062	1.57	SPR	Z	MH
0.75	19.05	75	4.5	114.3	1.2	0.21	1	4.45	7.8	198.12	10	44.48	0.062	1.57	HD	Z	MH
0.75	19.05	80843	4.5	114.3	1.4	0.25	1	4.45	9.7	246.38	15	66.72	0.063	1.6	MW	N	FL
0.75	19.05	80843S	4.5	114.3	1.2	0.21	1	4.45	7.935	201.549	11	48.93	0.0625	1.59	SST	N	FL
0.75	19.05	80853	4.5	114.3	2.3	0.4	2	8.9	7.6	193.04	19	84.51	0.069	1.75	MW	N	FL
0.75	19.05	80853S	4.5	114.3	2	0.35	1	4.45	6	152.4	13	57.82	0.069	1.75	SST	N	FL
0.75	19.05	80863	4.5	114.3	3.6	0.63	2	8.9	6	152.4	23	102.3	0.075	1.91	MW	N	FL
0.75	19.05	80863S	4.5	114.3	3	0.53	2	8.9	4.7	119.38	16	71.17	0.075	1.91	SST	N	FL
0.75	19.05	80874	4.5	114.3	6.9	1.21	3	13.34	4.4	111.76	34	151.23	0.085	2.16	MW	N	FL
0.75	19.05	80874S	4.5	114.3	5.9	1.03	2	8.9	3.5	88.9	23	102.3	0.085	2.16	SST	N	FL
0.75	19.05	80883	4.5	114.3	11	1.93	4	17.79	3.5	88.9	42	186.82	0.093	2.36	MW	N	FL
0.75	19.05	80883S	4.5	114.3	9.3	1.63	3	13.34	2.7	68.58	28	124.54	0.093	2.36	SST	N	FL
0.75	19.05	80892	4.5	114.3	12	2.1	4	17.79	3.3	88.32	44	195.71	0.095	2.41	MW	N	FL
0.75	19.05	80892S	4.5	114.3	11	1.93	3	13.34	2.5	63.5	30	133.44	0.095	2.41	SST	N	FL
0.75	19.05	80903	4.5	114.3	21	3.68	5	22.24	2.6	66.04	60	2					




O.D. Inches mm	Century Stock Number	Length Inches mm	Rate Lbs./In. N/mm	Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm	Mat'l	F	E							
									in	sh							
0.75	19.05	80854	5	127	2	0.35	8.9	8.7	220.98	19	84.51	0.069	1.75	MW	N	FL	
0.75	19.05	80854S	5	127	1.7	0.3	1	4.45	6.9	175.26	13	57.82	0.069	1.75	SST	N	FL
0.75	19.05	80864	5	127	3.1	0.54	2	8.9	6.9	175.26	23	102.3	0.075	1.91	MW	Z	FL
0.75	19.05	5893	5	127	2.7	0.47	3	13.34	5.6	142.24	18	80.06	0.075	1.91	SPR	Z	FL
0.75	19.05	6036	5	127	2.4	0.42	3	13.34	6	152.4	17	75.62	0.075	1.91	SST	N	FL
0.75	19.05	80875	5	127	6	1.05	3	13.34	5.1	129.54	34	151.23	0.085	2.16	MW	N	FL
0.75	19.05	80875S	5	127	5.1	0.89	2	8.9	4	101.6	23	102.3	0.085	2.16	SST	N	FL
0.75	19.05	80884	5	127	9.6	1.68	4	17.79	4	101.6	42	186.82	0.093	2.36	MW	N	FL
0.75	19.05	80884S	5	127	8.2	1.44	3	13.34	3.1	78.74	28	124.54	0.093	2.36	SST	N	FL
0.75	19.05	80893	5	127	11	1.93	4	17.79	3.8	96.52	44	195.71	0.095	2.41	MW	N	FL
0.75	19.05	80893S	5	127	9.2	1.61	3	13.34	2.9	73.66	30	133.44	0.095	2.41	SST	N	FL
0.75	19.05	80904	5	127	18	3.15	5	22.24	3	76.2	60	266.88	0.105	2.67	MW	N	FL
0.75	19.05	80904S	5	127	15	2.63	5	22.24	2.3	58.42	40	177.92	0.105	2.67	SST	N	FL
0.75	19.05	80913	5	127	30	5.25	17.6	78.28	2.2	55.88	73	324.7	0.115	2.92	MW	N	FL
0.75	19.05	80913S	5	127	26	4.55	5	22.24	1.7	43.18	48	213.5	0.115	2.92	SST	N	FL
0.75	19.05	193	5	127	36	6.3	21	93.41	1.5	38.1	74	329.15	0.12	3.05	HD	Z	MH
0.75	19.05	80924	5	127	48	8.4	8	35.58	1.8	45.72	93	413.66	0.125	3.18	MW	N	FL
0.75	19.05	80924S	5	127	41	7.18	7	31.14	1.3	33.02	61	271.33	0.125	3.18	SST	N	FL
0.75	19.05	5799	5.13	130.302	3.5	0.61	3	13.34	4.8	121.92	20	88.96	0.078	1.98	SPR	Z	MH
0.75	19.05	80845	5.5	139.7	1.1	0.19	1	4.45	12	304.8	15	66.72	0.063	1.6	MW	N	FL
0.75	19.05	80845S	5.5	139.7	0.94	0.16	1	4.45	10.13	257.302	11	48.93	0.0625	1.59	SST	N	FL
0.75	19.05	80855	5.5	139.7	1.8	0.32	2	8.9	9.9	251.46	19	84.51	0.069	1.75	MW	N	FL
0.75	19.05	80855S	5.5	139.7	1.5	0.26	1	4.45	7.8	198.12	13	57.82	0.069	1.75	SST	N	FL
0.75	19.05	80865	5.5	139.7	2.7	0.47	2	8.9	7.8	198.12	23	102.3	0.075	1.91	MW	N	FL
0.75	19.05	80865S	5.5	139.7	2.3	0.4	2	8.9	6.1	154.94	16	71.17	0.075	1.91	SST	N	FL
0.75	19.05	80894	5.5	139.7	9.5	1.66	4	17.79	4.3	109.22	44	195.71	0.095	2.41	MW	N	FL
0.75	19.05	80894S	5.5	139.7	8.1	1.42	3	13.34	3.3	83.82	30	133.44	0.095	2.41	SST	N	FL
0.75	19.05	80914	5.5	139.7	27	4.73	6	26.69	2.5	63.5	73	324.7	0.115	2.92	MW	N	FL
0.75	19.05	80914S	5.5	139.7	23	4.03	5	22.24	1.9	48.26	48	213.5	0.115	2.92	SST	N	FL
0.75	19.05	5516	5.63	143.002	7.2	1.26	6	26.69	3.6	91.44	33	146.78	0.092	2.34	SPR	Z	MH
0.75	19.05	5642	5.69	144.526	20	3.5	11	48.93	1.9	48.26	50	222.4	0.105	2.67	SPR	Z	MH
0.75	19.05	12397	5.75	146.05	9.5	1.66	9	40.03	3.3	83.82	40	177.92	0.098	2.49	SPR	Z	MH
0.75	19.05	80866	6	152.4	2.4	0.42	2	8.9	8.8	223.52	23	102.3	0.075	1.91	MW	N	FL
0.75	19.05	80866S	6	152.4	2.1	0.37	2	8.9	6.8	172.72	16	71.17	0.075	1.91	SST	N	FL
0.75	19.05	194	6	152.4	3	0.53	4	17.79	6	152.4	22	97.86	0.08	2.03	HD	Z	MH
0.75	19.05	S-605	6	152.4	5.4	0.95	6	26.69	4.3	109.22	29	128.99	0.091	2.31	SST	N	MH
0.75	19.05	80895	6	152.4	8.5	1.49	4	17.79	4.8	121.92	44	195.71	0.095	2.41	MW	N	FL
0.75	19.05	80895S	6	152.4	7.2	1.26	3	13.34	3.7	93.98	30	133.44	0.095	2.41	SST	N	FL
0.75	19.05	80915	6	152.4	24	4.2	6	26.69	2.8	71.12	73	324.7	0.115	2.92	MW	N	FL
0.75	19.05	80915S	6	152.4	20	3.5	5	22.24	2.1	53.34	48	213.5	0.115	2.92	SST	N	FL
0.75	19.05	100	6.5	165.1	5.9	1.03	6	26.69	4.2	106.68	31	137.89	0.091	2.31	HD	Z	MH
0.75	19.05	5514	6.88	174.752	19	3.33	17	75.62	2.5	63.5	64	284.67	0.115	2.92	SPR	Z	MH
0.75	19.05	5314	7	177.8	50	8.75	34	151.23	1.4	35.56	107	475.94	0.135	3.43	SPR	Z	MH
0.75	19.05	5586	7.25	184.15	11	1.93	11	48.93	3.4	86.36	50	222.4	0.105	2.67	SPR	Z	MH
0.75	19.05	5564	7.25	184.15	28	4.9	25	111.2	2.1	53.34	84	373.63	0.125	3.18	HD	Z	MH
0.75	19.05	5438	7.5	190.5	0.63	0.11	1	4.45	15	381	10	44.48	0.062	1.57	SPR	Z	MH
0.75	19.05	12350	7.88	200.152	10	1.75	12	53.38	3.9	99.06	51	226.85	0.106	2.69	SPR	Z	FL
0.75	19.05	131	8.5	215.9	1.2	0.21	2	8.9	11	279.4	16	71.17	0.072	1.83	HD	Z	MH
0.75	19.05	132	8.5	215.9	2.1	0.37	4	17.79	8.6	218.44	22	97.86	0.08	2.03	HD	Z	MH
0.75	19.05	636	8.5	215.9	4.2	0.74	6	26.69	6	152.4	31	137.89	0.091	2.31	HD	Z	MH
0.75	19.05	5025	8.5	215.9	45	7.88	41	182.37	1.8	45.72	120	533.76	0.14	3.56	SPR	Z	MH
0.75	19.05	6109	9	228.6	18	3.16	21	92.5	3.5	88.9	84	373.7	0.12	3.05	MW	ZINC	MH
0.75	19.05	5147	9.25	234.95	1.9	0.33	4	17.79	9.5	241.3	22	97.86	0.08	2.03	HD	Z	MH
0.75	19.05	5081	9.5	241.3	1.8	0.32	4	17.79	9.9	251.46	22	97.86	0.08	2.03	HD	Z	MH
0.75	19.05	5320	11	279.4	3.2	0.56	6	26.69	7.8	198.12	31	137.89	0.091	2.31	SPR	Z	MH
0.75	19.05	5604	11.9	302.26	10	1.75	17	75.62	4.6	116.84	64	284.67	0.115	2.92	SPR	Z	MH
0.75	19.05	5579	12.6	320.04	5.8	1.02	11	48.93	6.6	167.64	50	222.4	0.105	2.67	SPR	Z	MH
0.75	19.05	4010	16.5	419.1	5.8	1.02	14	62.27	7.1	180.34	55	244.64	0.11	2.79	SPR	Z	MH
0.765	19.431	12396	1.84	46.736	0.17	0.03	0.1	0.44	10	254	1.8	8.01	0.034	0.86	SPR	Z	FL
0.765	19.431	12362	2.47	62.738	8.4	1.47	3	13.34	2	50.8	20	88.96	0.079	2.01	SPR	N	MH
0.765	19.431	12365	2.5	63.5	9.4	1.65	4	17.79	2	50.8	22	97.86	0.081	2.06	SPR	N	MH
0.765	19.431	5326	2.88	73.152	34	5.95	11	48.93	1.1	27.94	49	217.95	0.105	2.67	SPR	Z	FL
0.765	19.431	B7-62	3.5	88.9	4.2	0.74	3	13.34	3.6	91.44	18	80.06	0.076	1.93	SPR	N	FL
0.781	19.837	5307	2.88	73.152	1.6	0.28	0.6	2.67	3.7	93.98	6.5	28.91	0.054	1.37	SPR	N	EH
0.781	19.837	5512	2.94	74.676	19	3.33	7	31.14	1.4	35.56	34	151.23	0.095	2.41	SPR	Z	MH
0.812	20.625	S-613	2.94	74.676	12	2.1	5	22.24	1.8	45.72	26	115.65	0.09	2.29	SST	N	MH
0.812	20.625	12538	3.13	79.502	72	12.6	20	88.96	0.77	19.558	76	338.05	0.125	3.18	HD	Z	MH
0.812	20.625	5699	3.25	82.55	72	12.6	20	88.96	0.77	19.558	76	338.05	0.125	3.18	SP		

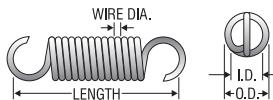


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length		Rate		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia.		Mat'l	F nsh Ends					
		Inches	mm	Lbs./In.	N/mm				Inches	mm							
0.812	20.625	134	8.5	215.9	0.92	0.16	2	8.9	14	355.6	14	62.27	0.072	1.83	HD	Z	MH
0.812	20.625	135	8.5	215.9	1.6	0.28	3	13.34	10	254	20	88.96	0.08	2.03	HD	Z	MH
0.812	20.625	136	8.5	215.9	3.2	0.56	5	22.24	7.3	185.42	29	128.99	0.091	2.31	HD	Z	SH
0.812	20.625	5047	12.8	325.12	2.1	0.37	5	22.24	11	279.4	29	128.99	0.091	2.31	HD	Z	FL
0.843	21.412	5901	2.25	57.15	11	1.93	4	17.79	1.7	43.18	23	102.3	0.085	2.16	SPR	Z	FL
0.843	21.412	6040	2.25	57.15	9.8	1.72	3	13.34	1.9	48.26	22	97.86	0.085	2.16	SST	N	FL
0.843	21.412	5358	2.56	65.024	29	5.08	7	31.14	1	25.4	37	164.58	0.1	2.54	SPR	Z	MH
0.843	21.412	5321	2.69	68.326	187	32.73	39	173.47	0.45	11.43	124	551.55	0.148	3.76	SPR	Z	MH
0.843	21.412	5944	2.75	69.85	8	1.4	4	17.79	2.4	60.96	23	102.3	0.085	2.16	SPR	Z	FL
0.843	21.412	6041	2.75	69.85	7.1	1.24	3	13.34	2.6	66.04	22	97.86	0.085	2.16	SST	N	FL
0.843	21.412	5300	2.75	69.85	53	9.28	16	71.17	0.93	23.622	65	289.12	0.12	3.05	SPR	Z	MH
0.843	21.412	5633	3	76.2	4.7	0.82	2	8.9	2.9	73.66	16	71.17	0.075	1.91	SPR	Z	MH
0.843	21.412	5902	3	76.2	7.1	1.24	4	17.79	2.7	68.58	23	102.3	0.085	2.16	SPR	Z	FL
0.843	21.412	6037	3.5	88.9	2.6	0.46	2	8.9	4.9	124.46	15	66.72	0.075	1.91	SST	N	FL
0.843	21.412	5903	3.75	95.25	5.2	0.91	4	17.79	3.7	93.98	23	102.3	0.085	2.16	SPR	Z	FL
0.843	21.412	5663	3.81	96.774	18	3.15	9	40.03	2	50.8	43	191.26	0.105	2.67	SPR	Z	MH
0.843	21.412	5895	4	101.6	2.5	0.44	2	8.9	5.6	142.24	16	71.17	0.075	1.91	SPR	Z	FL
0.843	21.412	6038	4	101.6	2.2	0.39	2	8.9	5.9	149.86	15	66.72	0.075	1.91	SST	N	MH
0.843	21.412	5945	4	101.6	4.8	0.84	4	17.79	4.1	104.14	23	102.3	0.085	2.16	SPR	Z	FL
0.843	21.412	6042	4	101.6	4.2	0.74	3	13.34	4.3	109.22	22	97.86	0.085	2.16	SST	N	FL
0.843	21.412	5904	4.25	107.95	4.4	0.77	4	17.79	4.4	111.76	23	102.3	0.085	2.16	SPR	Z	FL
0.843	21.412	6043	4.25	107.95	3.9	0.68	3	13.34	4.7	119.38	22	97.86	0.085	2.16	SST	N	FL
0.843	21.412	5570	4.25	107.95	6.5	1.14	5	22.24	3.5	88.9	27	120.1	0.091	2.31	SPR	Z	MH
0.843	21.412	S-633	4.44	112.776	1.8	0.32	2	8.9	6.3	160.02	13	57.82	0.072	1.83	SST	N	FL
0.843	21.412	6044	4.5	114.3	3.6	0.63	3	13.34	5	127	22	97.86	0.085	2.16	SST	N	FL
0.843	21.412	6039	4.75	120.65	1.8	0.32	2	8.9	7.3	185.42	15	66.72	0.075	1.91	SST	N	FL
0.843	21.412	5896	5	127	1.9	0.33	2	8.9	7.4	187.96	16	71.17	0.075	1.91	SPR	Z	FL
0.843	21.412	5655	5	127	4.2	0.74	4	17.79	4.6	116.84	23	102.3	0.085	2.16	SPR	Z	MH
0.843	21.412	S-631	5	127	3.7	0.65	3	13.34	4.9	124.46	22	97.86	0.085	2.16	SST	N	FL
0.843	21.412	5599	7.81	198.374	6.8	1.19	9	40.03	5	127	43	191.26	0.105	2.67	HD	Z	MH
0.85	21.59	80925	2	50.8	3.2	0.56	0.7	3.11	2.6	66.04	8.9	39.59	0.055	1.4	MW	N	FL
0.85	21.59	80925S	2	50.8	2.7	0.47	0.6	2.67	2	50.8	6.1	27.13	0.055	1.4	SST	N	FL
0.85	21.59	80944	2	50.8	31	5.43	2	8.9	0.9	22.86	30	133.44	0.085	2.16	MW	N	FL
0.85	21.59	80944S	2	50.8	26	4.55	2	8.9	0.7	17.78	20	88.96	0.085	2.16	SST	N	FL
0.85	21.59	80926	2.25	57.15	2.1	0.37	0.7	3.11	3.9	99.06	8.9	39.59	0.055	1.4	MW	N	FL
0.85	21.59	80926S	2.25	57.15	1.8	0.32	0.6	2.67	3.1	78.74	6.1	27.13	0.055	1.4	SST	N	FL
0.85	21.59	80929	2.25	57.15	3.9	0.68	1	4.45	3.1	78.74	13	57.82	0.063	1.6	MW	N	FL
0.85	21.59	80929S	2.25	57.15	3.3	0.58	0.9	4	2.625	66.675	9.7	43.15	0.0625	1.59	SST	N	FL
0.85	21.59	80934	2.25	57.15	9.7	1.7	2	8.9	2	50.8	21	93.41	0.075	1.91	MW	N	FL
0.85	21.59	80934S	2.25	57.15	8.2	1.44	1	4.45	1.5	38.1	14	62.27	0.075	1.91	SST	N	FL
0.85	21.59	80945	2.25	57.15	19	3.33	2	8.9	1.4	35.56	30	133.44	0.085	2.16	MW	N	FL
0.85	21.59	80945S	2.25	57.15	16	2.8	2	8.9	1.1	27.94	20	88.96	0.085	2.16	SST	N	FL
0.85	21.59	80927	2.5	63.5	1.6	0.28	0.7	3.11	5.1	129.54	8.9	39.59	0.055	1.4	MW	N	FL
0.85	21.59	80927S	2.5	63.5	1.4	0.25	0.6	2.67	4.1	104.14	6.1	27.13	0.055	1.4	SST	N	FL
0.85	21.59	80930	2.5	63.5	2.9	0.51	1	4.45	4.1	104.14	13	57.82	0.063	1.6	MW	N	FL
0.85	21.59	80930S	2.5	63.5	2.5	0.44	0.9	4	3.465	88.011	9.7	43.15	0.0625	1.59	SST	N	FL
0.85	21.59	80935	2.5	63.5	7.5	1.31	2	8.9	2.6	66.04	21	93.41	0.075	1.91	MW	N	FL
0.85	21.59	80935S	2.5	63.5	6.4	1.12	1	4.45	2	50.8	14	62.27	0.075	1.91	SST	N	FL
0.85	21.59	80946	2.5	63.5	14	2.45	2	8.9	2	50.8	30	133.44	0.085	2.16	MW	N	FL
0.85	21.59	80946S	2.5	63.5	12	2.1	2	8.9	1.5	38.1	20	88.96	0.085	2.16	SST	N	FL
0.85	21.59	80928	2.75	69.85	1.2	0.21	0.7	3.11	6.8	172.72	8.9	39.59	0.055	1.4	MW	N	FL
0.85	21.59	80928S	2.75	69.85	1	0.18	0.6	2.67	5.4	137.16	6.1	27.13	0.055	1.4	SST	N	FL
0.85	21.59	80931	2.75	69.85	2.3	0.4	1	4.45	5.2	132.08	13	57.82	0.063	1.6	MW	N	FL
0.85	21.59	80931S	2.75	69.85	2	0.35	0.9	4	4.331	110.007	9.7	43.15	0.0625	1.59	SST	N	FL
0.85	21.59	80936	2.75	69.85	6	1.05	2	8.9	3.2	81.28	21	93.41	0.075	1.91	MW	N	FL
0.85	21.59	80936S	2.75	69.85	5.1	0.89	1	4.45	2.5	63.5	14	62.27	0.075	1.91	SST	N	FL
0.85	21.59	80947	2.75	69.85	11	1.93	2	8.9	2.4	60.96	30	133.44	0.085	2.16	MW	N	FL
0.85	21.59	80947S	2.75	69.85	9.5	1.66	2	8.9	1.9	48.26	20	88.96	0.085	2.16	SST	N	FL
0.85	21.59	80932	3	76.2	1.9	0.33	1	4.45	6.3	160.02	13	57.82	0.063	1.6	MW	N	FL
0.85	21.59	80932S	3	76.2	1.6	0.28	0.9	4	5.4	137.16	9.7	43.15	0.0625	1.59	SST	N	FL
0.85	21.59	80937	3	76.2	5	0.88	2	8.9	3.8	96.52	21	93.41	0.075	1.91	MW	N	FL
0.85	21.59	80937S	3	76.2	4.3	0.75	1	4.45	3	76.2	14	62.27	0.075	1.91	SST	N	FL
0.85	21.59	80948	3	76.2	9.5	1.66	2	8.9	2.9	73.66	30	133.44	0.085	2.16	MW	N	FL
0.85	21.59	80948S	3	76.2	8.1	1.42	2	8.9	2.2	55.88	20	88.96	0.085	2.16	SST	N	FL
0.85	21.59	80933	3.5	88.9	1.4	0.25	1	4.45	8.6	218.44	13	57.82	0.063	1.6	MW	N	FL
0.85	21.59	80933S	3.5	88.9	1.2	0.21	0.9	4	7.218	183.337	9.7	43.15	0.0625	1.59	SST	N	FL
0.85	21.59	80938	3.5	88.9	3.8	0.67	2	8.9	5.1	129.54	21	93.41	0.075	1.91	MW	N	FL
0.85	21.59	80938S	3.5	88.9	3.2	0.56	1	4.45	4	1							




O.D. Inches mm	Century Stock Number	Length Inches mm	Rate		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm	Mat'l	F	E						
			Lbs./In.	N/mm						Ends							
0.85	21.59	80952	4.75	120.65	4.5	0.79	2	8.9	6.1	154.94	30	133.44	0.085	2.16	MW	N	FL
0.85	21.59	80952S	4.75	120.65	3.8	0.67	2	8.9	4.7	119.38	20	88.96	0.085	2.16	SST	N	FL
0.85	21.59	80942	5	127	2.2	0.39	2	8.9	8.7	220.98	21	93.41	0.075	1.91	MW	N	FL
0.85	21.59	80942S	5	127	1.9	0.33	1	4.45	6.8	172.72	14	62.27	0.075	1.91	SST	N	FL
0.85	21.59	80953	5	127	4.2	0.74	2	8.9	6.6	167.64	30	133.44	0.085	2.16	MW	N	FL
0.85	21.59	80953S	5	127	3.5	0.61	2	8.9	5.1	129.54	20	88.96	0.085	2.16	SST	N	FL
0.85	21.59	80943	5.25	133.35	9.7	1.7	2	8.9	2	50.8	21	93.41	0.075	1.91	MW	N	FL
0.85	21.59	80943S	5.25	133.35	8.2	1.44	1	4.45	1.5	38.1	14	62.27	0.075	1.91	SST	N	FL
0.85	21.59	80954	5.5	139.7	3.6	0.63	2	8.9	7.6	193.04	30	133.44	0.085	2.16	MW	N	FL
0.85	21.59	80955	5.5	139.7	3.1	0.54	2	8.9	5.9	149.86	20	88.96	0.085	2.16	SST	N	FL
0.85	21.59	80955	6	152.4	3.2	0.56	2	8.9	8.5	215.9	30	133.44	0.085	2.16	MW	N	FL
0.85	21.59	80955S	6	152.4	2.7	0.47	2	8.9	6.6	167.64	20	88.96	0.085	2.16	SST	N	FL
0.859	21.819	B7-63	2.5	63.5	5.3	0.93	2	8.9	2.8	71.12	17	75.62	0.077	1.96	SPR	N	FL
0.859	21.819	B18-195	3.94	100.076	4.3	0.75	3	13.34	4.3	109.22	22	97.86	0.084	2.13	SPR	Z	FL
0.859	21.819	5530	4.75	120.65	27	4.73	15	66.72	1.8	45.72	63	280.22	0.12	3.05	SPR	Z	MH
0.859	21.819	5601	5.75	146.05	9.2	1.61	8	35.58	3.7	93.98	42	186.82	0.105	2.67	HD	Z	MH
0.875	22.225	5287	2.5	63.5	57	9.98	14	62.27	0.84	21.336	62	275.78	0.12	3.05	SPR	Z	FL
0.875	22.225	5584	3.34	84.836	21	3.68	8	35.58	1.6	40.64	41	182.37	0.105	2.67	HD	Z	MH
0.875	22.225	5520	3.38	85.852	9.7	1.7	4	17.79	2.2	55.88	26	115.65	0.091	2.31	HD	Z	MH
0.875	22.225	78	3.5	88.9	7.7	1.35	4	17.79	2.8	71.12	26	115.65	0.091	2.31	HD	Z	MH
0.875	22.225	5465	3.78	96.012	107	18.73	30	133.44	0.77	19.558	112	498.18	0.148	3.76	SPR	Z	MH
0.875	22.225	5442	4.13	104.902	29	5.08	14	62.27	1.6	40.64	62	275.78	0.12	3.05	SPR	Z	MH
0.875	22.225	5451	4.25	107.95	13	2.28	8	35.58	2.6	66.04	41	182.37	0.105	2.67	SPR	Z	MH
0.875	22.225	5267	5.38	136.652	9.6	1.68	8	35.58	3.5	88.9	41	182.37	0.105	2.67	HD	Z	FL
0.875	22.225	5532	5.75	146.05	6.8	1.19	7	31.14	4.2	106.68	35	155.68	0.1	2.54	SPR	Z	MH
0.875	22.225	5547	5.81	147.574	4.1	0.72	5	22.24	5.5	139.7	27	120.1	0.092	2.34	SPR	Z	MH
0.875	22.225	5459	5.81	147.574	18	3.15	14	62.27	2.6	66.04	62	275.78	0.12	3.05	SPR	Z	MH
0.875	22.225	5555	5.88	149.352	4.1	0.72	5	22.24	5.5	139.7	27	120.1	0.092	2.34	SPR	Z	MH
0.875	22.225	98	6	152.4	3.9	0.68	4	17.79	5.6	142.24	26	115.65	0.091	2.31	HD	Z	MH
0.875	22.225	5838	6	152.4	5.8	1.02	7	31.14	4.9	124.46	35	155.68	0.1	2.54	SPR	Z	MH
0.875	22.225	5646	6.25	158.75	21	3.68	17	75.62	2.5	63.5	69	306.91	0.125	3.18	SPR	Z	MH
0.875	22.225	137	8.5	215.9	0.33	0.06	0.9	4	24	609.6	8.8	39.14	0.062	1.57	HD	Z	MH
0.875	22.225	138	8.5	215.9	1.3	0.23	3	13.34	12	304.8	18	80.06	0.08	2.03	HD	Z	MH
0.875	22.225	139	8.5	215.9	5.4	0.95	8	35.58	6.1	154.94	41	182.37	0.105	2.67	HD	Z	FL
0.875	22.225	5650	8.5	215.9	22	3.85	24	106.75	2.9	73.66	87	386.98	0.135	3.43	SPR	Z	MH
0.875	22.225	600	9	228.6	20	3.5	24	106.75	3.2	81.28	87	386.98	0.135	3.43	HD	Z	MH
0.875	22.225	5815	9	228.6	25	4.38	28	124.54	2.8	71.12	98	435.9	0.14	3.56	SPR	Z	MH
0.875	22.225	5318	9.75	247.65	5.4	0.95	8	35.58	6.2	157.48	41	182.37	0.105	2.67	SPR	Z	EH
0.875	22.225	616	11.8	299.72	1.8	0.32	4	17.79	12	304.8	26	115.65	0.091	2.31	HD	Z	DL
0.875	22.225	5518	12	304.8	16	2.8	25	111.2	4.1	104.14	91	404.77	0.137	3.48	SPR	Z	MH
0.875	22.225	5007	13.3	337.82	0.28	0.05	1	4.45	34	863.6	11	48.93	0.066	1.68	SPR	Z	MH
0.875	22.225	4071	24	609.6	1.8	0.32	8	35.58	19	482.6	41	182.37	0.105	2.67	HD	Z	MH
0.89	22.606	4402	17.3	439.42	58	10.15	97	431.46	2.4	60.96	238	1058.62	0.185	4.7	SPR	Z	MH
0.906	23.012	5697	3.38	85.852	69	12.08	22	97.86	0.88	22.352	83	369.18	0.135	3.43	SPR	Z	MH
0.906	23.012	5686	6.5	165.1	44	7.7	33	146.78	1.8	45.72	112	498.18	0.148	3.76	SPR	Z	MH
0.906	23.012	4056	26.5	673.1	0.99	0.17	6	26.69	27	685.8	32	142.34	0.098	2.49	SPR	N	MH
0.938	23.825	188	3	76.2	7.8	1.37	4	17.79	2.6	66.04	24	106.75	0.091	2.31	HD	Z	MH
0.938	23.825	5616	3.19	81.026	18	3.15	7	31.14	1.7	43.18	38	169.02	0.105	2.67	SPR	Z	MH
0.938	23.825	5319	4.06	103.124	15	2.63	7	31.14	2	50.8	38	169.02	0.105	2.67	SPR	N	MH
0.938	23.825	211	8.5	215.9	0.27	0.05	0.8	3.56	28	711.2	8.3	36.92	0.062	1.57	HD	Z	MH
0.938	23.825	140	8.5	215.9	0.59	0.1	1	4.45	19	482.6	12	53.38	0.072	1.83	HD	Z	MH
0.938	23.825	141	8.5	215.9	1.1	0.19	2	8.9	14	355.6	17	75.62	0.08	2.03	HD	Z	MH
0.938	23.825	142	8.5	215.9	2	0.35	4	17.79	10	254	24	106.75	0.091	2.31	HD	Z	MH
0.938	23.825	143	8.5	215.9	4.4	0.77	7	31.14	7.1	180.34	38	169.02	0.105	2.67	HD	Z	SL
0.938	23.825	210	8.5	215.9	8.9	1.56	12	53.38	5	127	57	253.54	0.12	3.05	HD	Z	MH
0.953	24.206	5589	3.75	95.25	25	4.38	12	53.38	1.7	43.18	56	249.09	0.12	3.05	HD	Z	MH
0.953	24.206	12387	3.75	95.25	24	4.2	12	53.38	1.9	48.26	57	253.54	0.121	3.07	SPR	Z	MH
0.953	24.206	12376	5.75	146.05	13	2.28	12	53.38	3.3	83.82	56	249.09	0.12	3.05	SPR	Z	MH
0.953	24.206	4057	26.5	673.1	1.2	0.21	7	31.14	25	635	37	164.58	0.105	2.67	SPR	N	MH
0.968	24.587	5693	2.75	69.85	7.7	1.35	4	17.79	2.6	66.04	23	102.3	0.091	2.31	SPR	Z	MH
0.968	24.587	5607	5.63	143.002	13	2.28	11	48.93	3.2	81.28	55	244.64	0.12	3.05	SPR	Z	MH
0.968	24.587	12382	5.66	143.764	15	2.63	13	57.82	3.2	81.28	59	262.43	0.12	3.05	MW	Z	DL
0.968	24.587	5658	7.5	190.5	9.3	1.63	11	48.93	4.6	116.84	55	244.64	0.12	3.05	SPR	Z	MH
0.968	24.587	5597	7.88	200.152	11	1.93	13	57.82	4.2	106.68	62	275.78	0.125	3.18	HD	Z	MH
1	25.4	80956	2.5	63.5	2.6	0.46	0.9	4	4	101.6	11	48.93	0.063	1.6	MW	N	FL
1	25.4	80956S	2.5	63.5	2.2	0.39	0.8	3.56	3.464	87.986	8.3	36.92	0.0625	1.59	SST	N	FL
1	25.4	80961	2.5	63.5	6.3	1.1	1	4.45	2.6	66.04	18	80.06	0.075	1.91	MW	N	FL</td

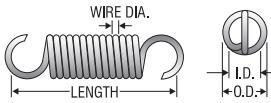


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm		Rate Lbs./In. N/mm		Initial Tension Lbs. N		Sugg Max. Defl. Inches mm		Sugg Max. load Lbs. N		Wire Dia. Inches mm		Mat'l	F nsh s	E nds	
		Inches	mm	Lbs./In.	N/mm	Lbs.	N	Inches	mm	Lbs.	N	Inches	mm				
1	25.4	81040	2.5	63.5	203	35.53	27	120.1	0.52	13.208	114	507.07	0.148	3.76	MW	N	FL
1	25.4	81040S	2.5	63.5	172	30.1	8	35.58	0.38	9.652	74	329.15	0.148	3.76	SST	N	FL
1	25.4	S-634	2.69	68.326	11	1.93	4	17.79	1.8	45.72	23	102.3	0.094	2.39	SST	N	FL
1	25.4	80957	2.75	69.85	1.9	0.33	0.9	4	5.5	139.7	11	48.93	0.063	1.6	MW	N	FL
1	25.4	80957S	2.75	69.85	1.6	0.28	0.8	3.56	4.763	120.98	8.3	36.92	0.0625	1.59	SST	N	FL
1	25.4	80962	2.75	69.85	4.6	0.81	1	4.45	3.6	91.44	18	80.06	0.075	1.91	MW	N	FL
1	25.4	80962S	2.75	69.85	3.9	0.68	1	4.45	2.8	71.12	12	53.38	0.075	1.91	SST	N	FL
1	25.4	5905	2.75	69.85	2.7	0.47	1	4.45	4.4	111.76	13	57.82	0.075	1.91	SPR	Z	FL
1	25.4	80969	2.75	69.85	8.5	1.49	2	8.9	2.8	71.12	26	115.65	0.085	2.16	MW	N	FL
1	25.4	80969S	2.75	69.85	7.2	1.26	2	8.9	2.2	55.88	18	80.06	0.085	2.16	SST	N	FL
1	25.4	80976	2.75	69.85	15	2.63	3	13.34	2.1	53.34	34	151.23	0.095	2.41	MW	N	FL
1	25.4	80976S	2.75	69.85	13	2.28	2	8.9	1.6	40.64	23	102.3	0.095	2.41	SST	N	FL
1	25.4	80989	2.75	69.85	26	4.55	4	17.79	1.6	40.64	46	204.61	0.105	2.67	MW	N	FL
1	25.4	80989S	2.75	69.85	22	3.85	3	13.34	1.3	33.02	31	137.89	0.105	2.67	SST	N	FL
1	25.4	81002	2.75	69.85	41	7.18	5	22.24	1.3	33.02	58	257.98	0.115	2.92	MW	N	FL
1	25.4	81002S	2.75	69.85	35	6.13	4	17.79	0.97	24.638	38	169.02	0.115	2.92	SST	N	FL
1	25.4	81015	2.75	69.85	66	11.55	6	26.69	1	25.4	73	324.7	0.125	3.18	MW	N	FL
1	25.4	81015S	2.75	69.85	56	9.8	5	22.24	0.78	19.812	48	213.5	0.125	3.18	SST	N	FL
1	25.4	5141	2.75	69.85	48	8.4	13	57.82	0.99	25.146	60	266.88	0.125	3.18	HD	Z	MH
1	25.4	81028	2.75	69.85	98	17.15	8	35.58	0.83	21.082	89	395.87	0.135	3.43	MW	N	FL
1	25.4	81028S	2.75	69.85	84	14.7	6	26.69	0.62	15.748	58	257.98	0.135	3.43	SST	N	FL
1	25.4	81041	2.75	69.85	159	27.83	10	44.48	0.66	16.764	114	507.07	0.148	3.76	MW	N	FL
1	25.4	81041S	2.75	69.85	135	23.63	8	35.58	0.49	12.446	74	329.15	0.148	3.76	SST	N	FL
1	25.4	80958	3	76.2	1.5	0.26	0.9	4	7	177.8	11	48.93	0.063	1.6	MW	N	FL
1	25.4	80958S	3	76.2	1.3	0.23	0.8	3.56	6.091	154.711	8.3	36.92	0.0625	1.59	SST	N	FL
1	25.4	80963	3	76.2	3.6	0.63	1	4.45	4.6	116.84	18	80.06	0.075	1.91	MW	N	FL
1	25.4	80963S	3	76.2	3.1	0.54	1	4.45	3.6	91.44	12	53.38	0.075	1.91	SST	N	FL
1	25.4	80970	3	76.2	6.8	1.19	2	8.9	3.5	88.9	26	115.65	0.085	2.16	MW	N	FL
1	25.4	80970S	3	76.2	5.8	1.02	2	8.9	2.7	68.58	18	80.06	0.085	2.16	SST	N	FL
1	25.4	80977	3	76.2	12	2.1	3	13.34	2.6	66.04	34	151.23	0.095	2.41	MW	N	FL
1	25.4	80977S	3	76.2	10	1.75	2	8.9	2	50.8	23	102.3	0.095	2.41	SST	N	FL
1	25.4	80990	3	76.2	21	3.68	4	17.79	2	50.8	46	204.61	0.105	2.67	MW	N	FL
1	25.4	80990S	3	76.2	18	3.15	3	13.34	1.5	38.1	31	137.89	0.105	2.67	SST	N	FL
1	25.4	81003	3	76.2	33	5.78	5	22.24	1.6	40.64	58	257.98	0.115	2.92	MW	N	FL
1	25.4	81003S	3	76.2	28	4.9	4	17.79	1.2	30.48	38	169.02	0.115	2.92	SST	N	FL
1	25.4	81016	3	76.2	52	9.1	6	26.69	1.3	33.02	73	324.7	0.125	3.18	MW	N	FL
1	25.4	81016S	3	76.2	45	7.88	5	22.24	0.97	24.638	48	213.5	0.125	3.18	SST	N	FL
1	25.4	81029	3	76.2	78	13.65	8	35.58	1.1	27.94	89	395.87	0.135	3.43	MW	N	FL
1	25.4	81029S	3	76.2	66	11.55	6	26.69	0.78	19.812	58	257.98	0.135	3.43	SST	N	FL
1	25.4	81042	3	76.2	124	21.7	27.3	121.43	0.84	21.336	114	507.07	0.148	3.76	MW	N	FL
1	25.4	81042S	3	76.2	105	18.38	8	35.58	0.63	16.002	74	329.15	0.148	3.76	SST	N	FL
1	25.4	80959	3.25	82.55	1.2	0.21	0.9	4	8.7	220.98	11	48.93	0.063	1.6	MW	N	FL
1	25.4	80959S	3.25	82.55	1	0.18	0.8	3.56	7.621	193.573	8.3	36.92	0.0625	1.59	SST	N	FL
1	25.4	80960	3.5	88.9	1	0.18	0.4	1.78	10	254	11	48.93	0.063	1.6	MW	N	FL
1	25.4	80960S	3.5	88.9	0.85	0.15	0.3	1.33	9.053	229.946	8.3	36.92	0.0625	1.59	SST	N	FL
1	25.4	80964	3.5	88.9	2.6	0.46	1	4.45	6.3	160.02	18	80.06	0.075	1.91	MW	N	FL
1	25.4	80964S	3.5	88.9	2.2	0.39	1	4.45	4.9	124.46	12	53.38	0.075	1.91	SST	N	FL
1	25.4	80971	3.5	88.9	5	0.88	2	8.9	4.8	121.92	26	115.65	0.085	2.16	MW	N	FL
1	25.4	80971S	3.5	88.9	4.3	0.75	2	8.9	3.7	93.98	18	80.06	0.085	2.16	SST	N	FL
1	25.4	80978	3.5	88.9	8.7	1.52	3	13.34	3.6	91.44	34	151.23	0.095	2.41	MW	N	FL
1	25.4	80978S	3.5	88.9	7.4	1.3	2	8.9	2.8	71.12	23	102.3	0.095	2.41	SST	N	FL
1	25.4	80991	3.5	88.9	15	2.63	4	17.79	2.9	73.66	46	204.61	0.105	2.67	MW	N	FL
1	25.4	80991S	3.5	88.9	12	2.1	3	13.34	2.2	55.88	31	137.89	0.105	2.67	SST	N	FL
1	25.4	81004	3.5	88.9	24	4.2	5	22.24	2.2	55.88	58	257.98	0.115	2.92	MW	N	FL
1	25.4	81004S	3.5	88.9	20	3.5	4	17.79	1.7	43.18	38	169.02	0.115	2.92	SST	N	FL
1	25.4	81017	3.5	88.9	37	6.48	6	26.69	1.8	45.72	73	324.7	0.125	3.18	MW	N	FL
1	25.4	81017S	3.5	88.9	32	5.6	5	22.24	1.4	35.56	48	213.5	0.125	3.18	SST	N	FL
1	25.4	81030	3.5	88.9	57	9.98	8	35.58	1.4	35.56	89	395.87	0.135	3.43	MW	N	FL
1	25.4	81030S	3.5	88.9	48	8.4	6	26.69	1.1	27.94	58	257.98	0.135	3.43	SST	N	FL
1	25.4	81043	3.5	88.9	93	16.28	10	44.48	1.1	27.94	114	507.07	0.148	3.76	MW	N	FL
1	25.4	81043S	3.5	88.9	79	13.83	8	35.58	0.83	21.082	74	329.15	0.148	3.76	SST	N	FL
1	25.4	5809	3.88	98.552	11	1.93	6	26.69	2.6	66.04	35	155.68	0.105	2.67	SPR	Z	MH
1	25.4	80965	4	101.6	2	0.35	1	4.45	8.2	208.28	18	80.06	0.075	1.91	MW	N	FL
1	25.4	80965S	4	101.6	1.7	0.3	1	4.45	6.4	162.56	12	53.38	0.075	1.91	SST	N	FL
1	25.4	5906	4	101.6	1.5	0.26	1	4.45	7.7	195.58	13	57.82	0.075	1.91	SPR	N	FL
1	25.4	5810	4	101.6	2.1	0.37	2	8.9	5.9	149.86	14	62.27	0.077	1.96	SPR	Z	MH
1	25.4	80972	4	101.6	3.9	0.68	2	8.9	6.1	154.94	26	115.65	0.085	2.16	MW	N	FL
1	25.4	80972S	4	101.6	3.3	0.58	2	8.9	4.8	121.92	18	80.06	0.085	2.16	SST	N	FL
1	25.4	6062	4	101.6	2	0.35	2	8.9	8</								




O.D. Inches mm	Century Stock Number	Length Inches mm	Rate Lbs./In. N/mm	Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm	Mat'l	F	E							
									inch	mm							
1	25.4	81031S	4	101.6	38	6.65	6	26.69	1.4	35.56	58	257.98	0.135	3.43	SST	N	FL
1	25.4	81044	4	101.6	72	12.6	10	44.48	1.5	38.1	114	507.07	0.148	3.76	MW	N	FL
1	25.4	81044S	4	101.6	61	10.68	8	35.58	1.1	27.94	74	329.15	0.148	3.76	SST	N	FL
1	25.4	5477	4.16	105.664	70	12.25	26	115.65	0.99	25.146	95	422.56	0.145	3.68	SPR	Z	MH
1	25.4	5773	4.19	106.426	10	1.75	6	26.69	2.9	73.66	35	155.68	0.105	2.67	HD	Z	MH
1	25.4	B5-58	4.47	113.538	42	0.74	4	17.79	5.38	136.652	26	115.65	0.095	2.41	SST	N	MH
1	25.4	80966	4.5	114.3	1.7	0.3	1	4.45	9.7	246.38	18	80.06	0.075	1.91	MW	N	FL
1	25.4	80966S	4.5	114.3	1.4	0.25	1	4.45	7.6	193.04	12	53.38	0.075	1.91	SST	N	FL
1	25.4	80973	4.5	114.3	3.2	0.56	2	8.9	7.4	187.96	26	115.65	0.085	2.16	MW	N	FL
1	25.4	80973S	4.5	114.3	2.7	0.47	2	8.9	5.8	147.32	18	80.06	0.085	2.16	SST	N	FL
1	25.4	80980	4.5	114.3	5.6	0.98	3	13.34	5.6	142.24	34	151.23	0.095	2.41	MW	N	FL
1	25.4	80980S	4.5	114.3	4.8	0.84	2	8.9	4.3	109.22	23	102.3	0.095	2.41	SST	N	FL
1	25.4	5947	4.5	114.3	4.4	0.77	4	17.79	4.9	124.46	26	115.65	0.095	2.41	SPR	Z	FL
1	25.4	6064	4.5	114.3	4.7	0.82	4	17.79	4.4	111.76	24	106.75	0.095	2.41	SST	N	FL
1	25.4	80993	4.5	114.3	9.3	1.63	4	17.79	4.5	114.3	46	204.61	0.105	2.67	MW	N	FL
1	25.4	80993S	4.5	114.3	7.9	1.38	3	13.34	3.5	88.9	31	137.89	0.105	2.67	SST	N	FL
1	25.4	81006	4.5	114.3	15	2.63	5	22.24	3.5	88.9	58	257.98	0.115	2.92	MW	N	FL
1	25.4	81006S	4.5	114.3	13	2.28	4	17.79	2.7	68.58	38	169.02	0.115	2.92	SST	N	FL
1	25.4	81019	4.5	114.3	24	4.2	6	26.69	2.8	71.12	73	324.7	0.125	3.18	MW	N	FL
1	25.4	81019S	4.5	114.3	20	3.5	5	22.24	2.1	53.34	48	213.5	0.125	3.18	SST	N	FL
1	25.4	81032	4.5	114.3	36	6.3	8	35.58	2.3	58.42	89	395.87	0.135	3.43	MW	N	FL
1	25.4	81032S	4.5	114.3	31	5.43	6	26.69	1.7	43.18	58	257.98	0.135	3.43	SST	N	FL
1	25.4	81045	4.5	114.3	59	10.33	10	44.48	1.8	45.72	114	507.07	0.148	3.76	MW	N	FL
1	25.4	81045S	4.5	114.3	50	8.75	8	35.58	1.3	33.02	74	329.15	0.148	3.76	SST	N	FL
1	25.4	5948	4.75	120.65	4.1	0.72	4	17.79	5.3	134.62	26	115.65	0.095	2.41	SPR	Z	FL
1	25.4	80967	5	127	1.4	0.25	1	4.45	12	304.8	18	80.06	0.075	1.91	MW	N	FL
1	25.4	80967S	5	127	1.2	0.21	1	4.45	9.2	233.68	12	53.38	0.075	1.91	SST	N	FL
1	25.4	5907	5	127	1.1	0.19	1	4.45	10	254	13	57.82	0.075	1.91	SPR	Z	FL
1	25.4	80974	5	127	2.7	0.47	2	8.9	8.8	223.52	26	115.65	0.085	2.16	MW	N	FL
1	25.4	80974S	5	127	2.3	0.4	2	8.9	6.9	175.26	18	80.06	0.085	2.16	SST	N	FL
1	25.4	5946	5	127	2.1	0.37	2	8.9	7.9	200.66	19	84.51	0.085	2.16	SPR	Z	FL
1	25.4	6063	5	127	2.2	0.39	2	8.9	7.3	185.42	18	80.06	0.085	2.16	SST	N	FL
1	25.4	80981	5	127	4.8	0.84	3	13.34	6.5	165.1	34	151.23	0.095	2.41	MW	N	FL
1	25.4	6065	5	127	4	0.7	4	17.79	5.1	129.54	24	106.75	0.095	2.41	SST	N	FL
1	25.4	5811	5	127	5.6	0.98	5	22.24	4.5	114.3	30	133.44	0.1	2.54	SPR	Z	MH
1	25.4	80994	5	127	7.9	1.38	4	17.79	5.3	134.62	46	204.61	0.105	2.67	MW	N	FL
1	25.4	80994S	5	127	6.7	1.17	3	13.34	4.1	104.14	31	137.89	0.105	2.67	SST	N	FL
1	25.4	81007	5	127	13	2.28	5	22.24	4.1	104.14	58	257.98	0.115	2.92	MW	N	FL
1	25.4	81007S	5	127	11	1.93	4	17.79	3.1	78.74	38	169.02	0.115	2.92	SST	N	FL
1	25.4	81020	5	127	20	3.5	6	26.69	3.3	83.82	73	324.7	0.125	3.18	MW	N	FL
1	25.4	81020S	5	127	17	2.98	5	22.24	2.5	63.5	48	213.5	0.125	3.18	SST	N	FL
1	25.4	81033	5	127	31	5.43	8	35.58	2.7	68.58	89	395.87	0.135	3.43	MW	N	FL
1	25.4	81033S	5	127	26	4.55	6	26.69	2	50.8	58	257.98	0.135	3.43	SST	N	FL
1	25.4	81046	5	127	50	8.75	10	44.48	2.1	53.34	114	507.07	0.148	3.76	MW	N	FL
1	25.4	81046S	5	127	42	7.35	8	35.58	1.6	40.64	74	329.15	0.148	3.76	SST	N	FL
1	25.4	5298	5.44	138.176	11	1.93	6	26.69	2.6	66.04	35	155.68	0.105	2.67	SPR	Z	EH
1	25.4	80982	5.5	139.7	4.1	0.72	3	13.34	7.6	193.04	34	151.23	0.095	2.41	MW	N	FL
1	25.4	80982S	5.5	139.7	3.5	0.61	2	8.9	5.8	147.32	23	102.3	0.095	2.41	SST	N	FL
1	25.4	80995	5.5	139.7	6.8	1.19	4	17.79	6.1	154.94	46	204.61	0.105	2.67	MW	N	FL
1	25.4	80995S	5.5	139.7	5.8	1.02	3	13.34	4.7	119.38	31	137.89	0.105	2.67	SST	N	FL
1	25.4	81008	5.5	139.7	11	1.93	5	22.24	4.8	121.92	58	257.98	0.115	2.92	MW	N	FL
1	25.4	81008S	5.5	139.7	9.4	1.65	4	17.79	3.6	91.44	38	169.02	0.115	2.92	SST	N	FL
1	25.4	81021	5.5	139.7	18	3.15	6	26.69	3.8	96.52	73	324.7	0.125	3.18	MW	N	FL
1	25.4	81021S	5.5	139.7	15	2.63	5	22.24	2.9	73.66	48	213.5	0.125	3.18	SST	N	FL
1	25.4	81034	5.5	139.7	26	4.55	8	35.58	3.1	78.74	89	395.87	0.135	3.43	MW	N	FL
1	25.4	81034S	5.5	139.7	22	3.85	6	26.69	2.3	58.42	58	257.98	0.135	3.43	SST	N	FL
1	25.4	81047	5.5	139.7	44	7.7	10	44.48	2.4	60.96	114	507.07	0.148	3.76	MW	N	FL
1	25.4	81047S	5.5	139.7	37	6.48	8	35.58	1.8	45.72	74	329.15	0.148	3.76	SST	N	FL
1	25.4	80983	6	152.4	3.6	0.63	3	13.34	8.6	218.44	34	151.23	0.095	2.41	MW	N	FL
1	25.4	80983S	6	152.4	3.1	0.54	2	8.9	6.6	167.64	23	102.3	0.095	2.41	SST	N	FL
1	25.4	80996	6	152.4	6	1.05	4	17.79	6.9	175.26	46	204.61	0.105	2.67	MW	N	FL
1	25.4	80996S	6	152.4	5.1	0.89	3	13.34	5.3	134.62	31	137.89	0.105	2.67	SST	N	FL
1	25.4	81009	6	152.4	9.8	1.72	5	22.24	5.4	137.16	58	257.98	0.115	2.92	MW	N	FL
1	25.4	81009S	6	152.4	8.3	1.45	4	17.79	4.1	104.14	38	169.02	0.115	2.92	SST	N	FL
1	25.4	81022	6	152.4	15	2.63	6	26.69	4.4	111.76	73	324.7	0.125	3.18	MW	N	FL
1	25.4	81022S	6	152.4	13	2.28	5	22.24	3.3	83.82	48	213.5	0.125	3.18	SST	N	FL
1	25.4	81035	6	152.4	23	4.03	19	48.51	3.5	88.9	89	395.87	0.135	3.43	MW	N	FL
1	25.4	81035S	6	152.4	20	3.5	6	26.69	2.6	66.04	58	257.98	0.135	3.43	SST	N	FL
1	25.4	81048	6	152.4	39	6.83	10	44.48	2.7	68.58	114	507.07	0.148	3.76	MW	N	FL
1	25.4	81048S	6	152.4	33	5.78	8</										

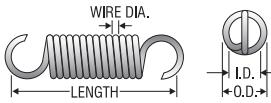


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm		Rate Lbs./In. N/mm		Initial Tension Lbs. N		Sugg Max. Defl. Inches mm		Sugg Max. load Lbs. N		Wire Dia. Inches mm		Mat'l	F nsh s	E nds	
		Inches	mm	Lbs./In.	N/mm	Lbs.	N	Inches	mm	Lbs.	N	Inches	mm				
1	25.4	81049	6.5	165.1	34	5.95	10	44.48	3.1	78.74	114	507.07	0.148	3.76	MW	N	FL
1	25.4	81049S	6.5	165.1	29	5.08	27	120.1	2.3	58.42	74	329.15	0.148	3.76	SST	N	FL
1	25.4	5043	6.63	168.402	86	15.05	57	253.54	1.4	35.56	176	782.85	0.177	4.5	SPR	Z	MH
1	25.4	80985	7	177.8	2.9	0.51	3	13.34	11	279.4	34	151.23	0.095	2.41	MW	N	FL
1	25.4	80985S	7	177.8	2.5	0.44	2	8.9	8.3	210.82	23	102.3	0.095	2.41	SST	N	FL
1	25.4	80998	7	177.8	5	0.88	4	17.79	8.4	213.36	46	204.61	0.105	2.67	MW	N	FL
1	25.4	80998S	7	177.8	4.3	0.75	3	13.34	6.4	162.56	31	137.89	0.105	2.67	SST	N	FL
1	25.4	81011	7	177.8	8.1	1.42	5	22.24	6.5	165.1	58	257.98	0.115	2.92	MW	N	FL
1	25.4	81011S	7	177.8	6.9	1.21	4	17.79	4.9	124.46	38	169.02	0.115	2.92	SST	N	FL
1	25.4	81024	7	177.8	13	2.28	6	26.69	5.4	137.16	73	324.7	0.125	3.18	MW	N	FL
1	25.4	81024S	7	177.8	11	1.93	5	22.24	4.1	104.14	48	213.5	0.125	3.18	SST	N	FL
1	25.4	81037	7	177.8	19	3.33	8	35.58	4.3	109.22	89	395.87	0.135	3.43	MW	N	FL
1	25.4	81037S	7	177.8	16	2.8	6	26.69	3.2	81.28	58	257.98	0.135	3.43	SST	N	FL
1	25.4	652	7	177.8	18	3.15	17	75.62	3.1	78.74	75	333.6	0.135	3.43	HD	Z	DL
1	25.4	81050	7	177.8	31	5.43	10	44.48	3.4	86.36	114	507.07	0.148	3.76	MW	N	FL
1	25.4	81050S	7	177.8	26	4.55	8	35.58	2.5	63.5	74	329.15	0.148	3.76	SST	N	FL
1	25.4	5557	7.25	184.15	7	1.23	9	40.03	5.3	134.62	46	204.61	0.115	2.92	SPR	Z	MH
1	25.4	5524	7.31	185.674	7.5	1.31	9	40.03	5.2	132.08	48	213.5	0.117	2.97	SPR	Z	MH
1	25.4	102	7.5	190.5	4.4	0.77	6	26.69	6.6	167.64	35	155.68	0.105	2.67	HD	Z	MH
1	25.4	80986	8	203.2	2.4	0.42	3	13.34	13	330.2	34	151.23	0.095	2.41	MW	N	FL
1	25.4	80986S	8	203.2	2	0.35	2	8.9	10	254	23	102.3	0.095	2.41	SST	N	FL
1	25.4	80999	8	203.2	4.2	0.74	4	17.79	10	254	46	204.61	0.105	2.67	MW	N	FL
1	25.4	80999S	8	203.2	3.6	0.63	3	13.34	7.7	195.58	31	137.89	0.105	2.67	SST	N	FL
1	25.4	5609	8	203.2	3.8	0.67	6	26.69	7.6	193.04	35	155.68	0.105	2.67	HD	BO	MH
1	25.4	81012	8	203.2	6.7	1.17	5	22.24	7.9	200.66	58	257.98	0.115	2.92	MW	N	FL
1	25.4	81012S	8	203.2	5.7	1	4	17.79	6	152.4	38	169.02	0.115	2.92	SST	N	FL
1	25.4	81025	8	203.2	11	1.93	6	26.69	6.4	162.56	73	324.7	0.125	3.18	MW	N	FL
1	25.4	81025S	8	203.2	8.9	1.56	5	22.24	4.8	121.92	48	213.5	0.125	3.18	SST	N	FL
1	25.4	81038	8	203.2	16	2.8	8	35.58	5.1	129.54	89	395.87	0.135	3.43	MW	N	FL
1	25.4	81038S	8	203.2	14	2.45	6	26.69	3.8	96.52	58	257.98	0.135	3.43	SST	N	FL
1	25.4	81051	8	203.2	26	4.55	10	44.48	4	101.6	114	507.07	0.148	3.76	MW	N	FL
1	25.4	81051S	8	203.2	22	3.85	8	35.58	3	76.2	74	329.15	0.148	3.76	SST	N	FL
1	25.4	649	8	203.2	25	4.38	26	115.65	2.9	73.66	99	440.35	0.148	3.76	HD	Z	FL
1	25.4	12349	8.13	206.502	4	0.7	6	26.69	7.4	187.96	35	155.68	0.105	2.67	SPR	Z	MH
1	25.4	5569	8.38	212.852	8.8	1.54	13	57.82	5.4	137.16	60	266.88	0.125	3.18	HD	Z	MH
1	25.4	144	8.5	215.9	0.86	0.15	2	8.9	16	406.4	16	71.17	0.08	2.03	HD	Z	MH
1	25.4	145	8.5	215.9	1.7	0.3	3	13.34	12	304.8	23	102.3	0.091	2.31	HD	Z	MH
1	25.4	12347	8.5	215.9	1.9	0.33	4	17.79	11	279.4	25	111.2	0.094	2.39	SPR	Z	MH
1	25.4	146	8.5	215.9	7.7	1.35	11	48.93	5.4	137.16	52	231.3	0.12	3.05	HD	Z	MH
1	25.4	80987	9	228.6	2.1	0.37	3	13.34	15	381	34	151.23	0.095	2.41	MW	N	FL
1	25.4	80987S	9	228.6	1.8	0.32	2	8.9	11	279.4	23	102.3	0.095	2.41	SST	N	FL
1	25.4	81000	9	228.6	3.6	0.63	4	17.79	12	304.8	46	204.61	0.105	2.67	MW	N	FL
1	25.4	81000S	9	228.6	3.1	0.54	3	13.34	8.9	226.06	31	137.89	0.105	2.67	SST	N	FL
1	25.4	81013	9	228.6	5.8	1.02	5	22.24	9.1	231.14	58	257.98	0.115	2.92	MW	N	FL
1	25.4	81013S	9	228.6	4.9	0.86	4	17.79	6.9	175.26	38	169.02	0.115	2.92	SST	N	FL
1	25.4	680	9	228.6	6.9	1.21	11	48.93	6.1	154.94	52	231.3	0.12	3.05	HD	Z	MH
1	25.4	81026	9	228.6	9	1.58	6	26.69	7.5	190.5	73	324.7	0.125	3.18	MW	N	FL
1	25.4	81026S	9	228.6	7.7	1.35	5	22.24	5.7	144.78	48	213.5	0.125	3.18	SST	N	FL
1	25.4	81039	9	228.6	14	2.45	8	35.58	6	152.4	89	395.87	0.135	3.43	MW	N	FL
1	25.4	81039S	9	228.6	12	2.1	6	26.69	4.4	111.76	58	257.98	0.135	3.43	SST	N	FL
1	25.4	81052	9	228.6	23	4.03	10	44.48	4.6	116.84	114	507.07	0.148	3.76	MW	N	FL
1	25.4	81052S	9	228.6	19	3.33	8	35.58	3.4	86.36	74	329.15	0.148	3.76	SST	N	FL
1	25.4	12546	9.5	241.3	12	2.1	18	80.06	4.7	119.38	75	333.6	0.135	3.43	HD	Z	MH
1	25.4	731	12	304.8	2.4	0.42	6	26.69	12	304.8	35	155.68	0.105	2.67	HD	Z	MH
1	25.4	729	12	304.8	5	0.88	11	48.93	8.4	213.36	52	231.3	0.12	3.05	HD	Z	MH
1	25.4	5105	12.2	309.88	2.6	0.46	6	26.69	11	279.4	35	155.68	0.105	2.67	HD	GI	FL
1	25.4	5531	13.1	332.74	5.5	0.96	13	57.82	8.5	215.9	60	266.88	0.125	3.18	HD	Z	MH
1	25.4	5643	16.5	419.1	6.7	1.17	17	75.62	8.5	215.9	75	333.6	0.135	3.43	SPR	Z	MH
1.031	26.187	5483	4.94	125.476	2.8	0.49	3	13.34	6.8	172.72	22	97.86	0.091	2.31	SPR	Z	MH
1.031	26.187	5487	8.13	206.502	107	18.73	76	338.05	1.3	33.02	214	951.87	0.192	4.88	SPR	Z	MH
1.031	26.187	12342	12.8	325.12	7.7	1.35	16	71.17	7.2	182.88	72	320.26	0.135	3.43	SPR	Z	MH
1.031	26.187	5660	16	406.4	1.6	0.28	6	26.69	17	431.8	34	151.23	0.105	2.67	SPR	Z	MH
1.062	26.975	187	3.5	88.9	37	6.48	15	66.72	1.4	35.56	69	306.91	0.135	3.43	HD	Z	MH
1.062	26.975	371	5	127	22	3.85	15	66.72	2.4	60.96	69	306.91	0.135	3.43	HD	Z	MH
1.062	26.975	5273	5.5	139.7	9.5	1.66	9	40.03	4.2	106.68	49	217.95	0.12	3.05	HD	Z	MH
1.062	26.975	5682	6.63	168.402	8	1.4	9	40.03	4.9	124.46	49	217.95	0.12	3.05	SPR	GI	MH
1.062	26.975	101	7	177.8	3.7	0.65	5	22.24	7.6	193.04	33	146.78	0.105	2.67	HD	Z	MH
1.062	26.975	147	8.5	215.9	0.69	0.12	2	8.9	19	482.6	15	66.72	0.08	2.03	HD	Z	MH
1.062	26.975	148	8.5	215.9													




O.D. Inches mm	Century Stock Number	Length		Rate		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia.		Mat'l	F n s h	E n d s	
		Inches	mm	Lbs./In.	N/mm				Inches	mm				
1.125	28.575	81071S	3	76.2	39	6.83	5	22.24	0.99	25.146	43	191.26	0.125	3.18
1.125	28.575	81054	3.5	88.9	4.3	0.75	2	8.9	4.9	124.46	23	102.3	0.085	2.16
1.125	28.575	81054S	3.5	88.9	3.7	0.65	2	8.9	3.9	99.06	16	71.17	0.085	2.16
1.125	28.575	81063	3.5	88.9	13	2.28	3	13.34	3	76.2	41	182.37	0.105	2.67
1.125	28.575	81063S	3.5	88.9	11	1.93	3	13.34	2.3	58.42	27	120.1	0.105	2.67
1.125	28.575	81072	3.5	88.9	30	5.25	6	26.69	2	50.8	66	293.57	0.125	3.18
1.125	28.575	81072S	3.5	88.9	26	4.55	5	22.24	1.5	38.1	43	191.26	0.125	3.18
1.125	28.575	81055	4	101.6	3.1	0.54	2	8.9	6.9	175.26	23	102.3	0.085	2.16
1.125	28.575	81055S	4	101.6	2.6	0.46	2	8.9	5.4	137.16	16	71.17	0.085	2.16
1.125	28.575	81064	4	101.6	9.2	1.61	3	13.34	4.1	104.14	41	182.37	0.105	2.67
1.125	28.575	81064S	4	101.6	7.8	1.37	3	13.34	3.1	78.74	27	120.1	0.105	2.67
1.125	28.575	81073	4	101.6	23	4.03	6	26.69	2.7	68.58	66	293.57	0.125	3.18
1.125	28.575	81073S	4	101.6	19	3.33	5	22.24	2	50.8	43	191.26	0.125	3.18
1.125	28.575	81056	4.5	114.3	2.5	0.44	2	8.9	8.5	215.9	23	102.3	0.085	2.16
1.125	28.575	81056S	4.5	114.3	2.1	0.37	2	8.9	6.7	170.18	16	71.17	0.085	2.16
1.125	28.575	81065	4.5	114.3	7.3	1.28	3	13.34	5.1	129.54	41	182.37	0.105	2.67
1.125	28.575	81065S	4.5	114.3	6.2	1.09	3	13.34	3.9	99.06	27	120.1	0.105	2.67
1.125	28.575	81074	4.5	114.3	18	3.15	6	26.69	3.4	86.36	66	293.57	0.125	3.18
1.125	28.575	81074S	4.5	114.3	15	2.63	5	22.24	2.5	63.5	43	191.26	0.125	3.18
1.125	28.575	81057	5	127	2	0.35	2	8.9	11	279.4	23	102.3	0.085	2.16
1.125	28.575	81057S	5	127	1.7	0.3	2	8.9	8.3	210.82	16	71.17	0.085	2.16
1.125	28.575	81066	5	127	6	1.05	3	13.34	6.2	157.48	41	182.37	0.105	2.67
1.125	28.575	81066S	5	127	5.1	0.89	3	13.34	4.8	121.92	27	120.1	0.105	2.67
1.125	28.575	81075	5	127	15	2.63	6	26.69	4	101.6	66	293.57	0.125	3.18
1.125	28.575	81075S	5	127	13	2.28	5	22.24	3.1	78.74	43	191.26	0.125	3.18
1.125	28.575	81058	5.5	139.7	1.7	0.3	2	8.9	13	330.2	23	102.3	0.085	2.16
1.125	28.575	81058S	5.5	139.7	1.4	0.25	2	8.9	9.8	248.92	16	71.17	0.085	2.16
1.125	28.575	81067	5.5	139.7	5.1	0.89	3	13.34	7.3	185.42	41	182.37	0.105	2.67
1.125	28.575	81067S	5.5	139.7	4.3	0.75	3	13.34	5.6	142.24	27	120.1	0.105	2.67
1.125	28.575	81076	5.5	139.7	13	2.28	6	26.69	4.7	119.38	66	293.57	0.125	3.18
1.125	28.575	81076S	5.5	139.7	11	1.93	5	22.24	3.6	91.44	43	191.26	0.125	3.18
1.125	28.575	81059	6	152.4	1.5	0.26	2	8.9	14	355.6	23	102.3	0.085	2.16
1.125	28.575	81059S	6	152.4	1.3	0.23	2	8.9	11	279.4	16	71.17	0.085	2.16
1.125	28.575	81068	6	152.4	4.5	0.79	3	13.34	8.3	210.82	41	182.37	0.105	2.67
1.125	28.575	81068S	6	152.4	3.8	0.67	3	13.34	6.4	162.56	27	120.1	0.105	2.67
1.125	28.575	81077	6	152.4	11	1.93	6	26.69	5.4	137.16	66	293.57	0.125	3.18
1.125	28.575	81077S	6	152.4	9.4	1.65	5	22.24	4.1	104.14	43	191.26	0.125	3.18
1.125	28.575	81060	6.5	165.1	1.3	0.23	2	8.9	16	406.4	23	102.3	0.085	2.16
1.125	28.575	81060S	6.5	165.1	1.1	0.19	2	8.9	13	330.2	16	71.17	0.085	2.16
1.125	28.575	81069	6.5	165.1	3.9	0.68	3	13.34	9.6	243.84	41	182.37	0.105	2.67
1.125	28.575	81069S	6.5	165.1	3.3	0.58	3	13.34	7.4	187.96	27	120.1	0.105	2.67
1.125	28.575	81078	6.5	165.1	9.9	1.73	6	26.69	6.1	154.94	66	293.57	0.125	3.18
1.125	28.575	81078S	6.5	165.1	8.4	1.47	5	22.24	4.6	116.84	43	191.26	0.125	3.18
1.125	28.575	81061	7	177.8	1.2	0.21	2	8.9	18	457.2	23	102.3	0.085	2.16
1.125	28.575	81061S	7	177.8	1	0.18	2	8.9	14	355.6	16	71.17	0.085	2.16
1.125	28.575	81070	7	177.8	3.5	0.61	3	13.34	11	279.4	41	182.37	0.105	2.67
1.125	28.575	81070S	7	177.8	3	0.53	3	13.34	8.2	208.28	27	120.1	0.105	2.67
1.125	28.575	81079	7	177.8	8.9	1.56	6	26.69	6.8	172.72	66	293.57	0.125	3.18
1.125	28.575	81079S	7	177.8	7.6	1.33	5	22.24	5.1	129.54	43	191.26	0.125	3.18
1.125	28.575	103	7.5	190.5	1.3	0.23	3	13.34	13	330.2	20	88.96	0.091	2.31
1.125	28.575	55656	7.75	196.85	17	2.98	20	88.96	3.9	99.06	87	386.98	0.148	3.76
1.125	28.575	5692	7.88	200.152	19	3.33	22	97.86	3.6	91.44	91	404.77	0.151	3.84
1.125	28.575	6087	8.25	209.55	6	1.05	11	48.93	10.164	258.15	70.4	313.15	0.125	3.18
1.125	28.575	5774	8.5	215.9	4.9	0.86	8	35.58	7.7	195.58	46	204.61	0.12	3.05
1.125	28.575	601	8.5	215.9	15	2.63	20	88.96	4.4	111.76	87	386.98	0.148	3.76
1.125	28.575	5192	12	304.8	3.3	0.58	8	35.58	11	279.4	46	204.61	0.12	3.05
1.125	28.575	615	16	406.4	1.2	0.21	5	22.24	22	558.8	31	137.89	0.105	2.67
1.125	28.575	4058	26.5	673.1	1.4	0.25	8	35.58	26	660.4	46	204.61	0.12	3.05
1.156	29.362	5698	5.19	131.826	30	5.25	19	84.51	2.2	55.88	84	373.63	0.148	3.76
1.156	29.362	373	9	228.6	2.2	0.39	4	17.79	12	304.8	31	137.89	0.105	2.67
1.156	29.362	12346	9	228.6	2.6	0.46	5.9	26.24	11	279.4	29	128.99	0.109	2.77
1.156	29.362	4059	26.5	673.1	1.6	0.28	9	40.03	26	660.4	50	222.4	0.125	3.18
1.18	29.972	6110	9	228.6	18	3.2	21	93.45	3.5	89	85	378	0.12	3.05
1.188	30.175	5716	10.8	274.32	17	2.98	28	124.6	4.7	119.38	81	360.29	0.162	4.11
1.188	30.175	634	12	304.8	5.3	0.93	12	53.38	9.2	233.68	61	271.33	0.135	3.43
1.188	30.175	725	12	304.8	15	2.63	26	115.65	5.5	139.7	107	475.94	0.162	4.11
1.203	30.556	5691	7	177.8	70	12.25	52	231.3	1.7	43.18	173	769.5	0.192	4.88
1.219	30.963	5645	7.75	196.85	11	1.93	14	62.27	5	127	69	306.91	0.142	3.61
1.234	31.344	5608	7.19	182.626	94	16.45	68	302.46	1.6	40.64	215	956.32	0.207	5.26
1.25	31.75	81080	3	76.2	7	1.23	2	8.9	2.7	68.58	21	93.41	0.085	2.16
1.25	31.75	81080S	3	76.2	6	1.05	2	8.9	2.1	53.34	14	62.27	0.085	2.16
1.25	31.75	81099	3	76.2	20	3.5	3	13.34	1.8	45.72	38	169.02	0.105	2.67
1.25	31.75	81099S	3	76.2	17	2.98	3	13.34	1.4	35.56	26	115.65	0.105	2.67
1.25	31.75	81118	3.01	76.454	34	5.95	6	26.69	1.9	48.26	73	324.7	0.135	3.43
1.25	31.75	81118S	3.01	76.454	29	5.08	5	22.24	1.4	35.56	47	209.06	0.135	3.43
1.25														

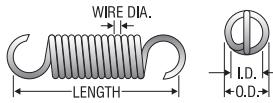


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm		Rate Lbs./In. N/mm		Initial Tension Lbs. N		Sugg Max. Defl. Inches mm		Sugg Max. load Lbs. N		Wire Dia. Inches mm		Mat'l	F nsh s	E nd s	
		Inches	mm	Lbs./In.	N/mm	Lbs.	N	Inches	mm	Lbs.	N	Inches	mm				
1.25	31.75	81119S	3.25	82.55	34	5.95	5	22.24	1.2	30.48	47	209.06	0.135	3.43	SST	N	FL
1.25	31.75	5153	3.38	85.852	26	4.55	10	44.48	1.8	45.72	57	253.54	0.135	3.43	HD	Z	MH
1.25	31.75	81081	3.5	88.9	4.3	0.75	2	8.9	4.5	114.3	21	93.41	0.085	2.16	MW	N	FL
1.25	31.75	81081S	3.5	88.9	3.7	0.65	2	8.9	3.5	88.9	14	62.27	0.085	2.16	SST	N	FL
1.25	31.75	81090	3.5	88.9	6.3	1.1	2	8.9	4.1	104.14	28	124.54	0.095	2.41	MW	N	FL
1.25	31.75	81090S	3.5	88.9	5.3	0.93	2	8.9	3.2	81.28	19	84.51	0.095	2.41	SST	N	FL
1.25	31.75	81100	3.5	88.9	13	2.28	3	13.34	2.8	71.12	38	169.02	0.105	2.67	MW	N	FL
1.25	31.75	81100S	3.5	88.9	11	1.93	3	13.34	2.1	53.34	26	115.65	0.105	2.67	SST	N	FL
1.25	31.75	81109	3.5	88.9	16	2.8	4	17.79	2.7	68.58	47	209.06	0.115	2.92	MW	N	FL
1.25	31.75	81109S	3.5	88.9	14	2.45	3	13.34	2	50.8	31	137.89	0.115	2.92	SST	N	FL
1.25	31.75	81120	3.5	88.9	39	6.83	6	26.69	1.7	43.18	73	324.7	0.135	3.43	MW	N	FL
1.25	31.75	81120S	3.5	88.9	33	5.78	5	22.24	1.3	33.02	47	209.06	0.135	3.43	SST	N	FL
1.25	31.75	81129	3.5	88.9	61	10.68	8	35.58	1.4	35.56	95	422.56	0.148	3.76	MW	N	FL
1.25	31.75	81129S	3.5	88.9	52	9.1	7	31.14	1.1	27.94	62	275.78	0.148	3.76	SST	N	FL
1.25	31.75	81082	4	101.6	3.1	0.54	2	8.9	6.2	157.48	21	93.41	0.085	2.16	MW	N	FL
1.25	31.75	81082S	4	101.6	2.6	0.46	2	8.9	4.8	121.92	14	62.27	0.085	2.16	SST	N	FL
1.25	31.75	81091	4	101.6	4.4	0.77	2	8.9	5.8	147.32	28	124.54	0.095	2.41	MW	N	FL
1.25	31.75	81091S	4	101.6	3.7	0.65	2	8.9	4.5	114.3	19	84.51	0.095	2.41	SST	N	FL
1.25	31.75	81101	4	101.6	9.2	1.61	3	13.34	3.7	93.98	38	169.02	0.105	2.67	MW	N	FL
1.25	31.75	81101S	4	101.6	7.8	1.37	3	13.34	2.9	73.66	26	115.65	0.105	2.67	SST	N	FL
1.25	31.75	81110	4	101.6	11	1.93	4	17.79	3.7	93.98	47	209.06	0.115	2.92	MW	N	FL
1.25	31.75	81110S	4	101.6	9.7	1.7	3	13.34	2.8	71.12	31	137.89	0.115	2.92	SST	N	FL
1.25	31.75	81121	4	101.6	26	4.55	6	26.69	2.5	63.5	73	324.7	0.135	3.43	MW	N	FL
1.25	31.75	81121S	4	101.6	22	3.85	5	22.24	1.9	48.26	47	209.06	0.135	3.43	SST	N	FL
1.25	31.75	81130	4	101.6	44	7.7	8	35.58	2	50.8	95	422.56	0.148	3.76	MW	N	FL
1.25	31.75	81130S	4	101.6	37	6.48	7	31.14	1.5	38.1	62	275.78	0.148	3.76	SST	N	FL
1.25	31.75	81083	4.5	114.3	2.5	0.44	2	8.9	7.7	195.58	21	93.41	0.085	2.16	MW	N	FL
1.25	31.75	81083S	4.5	114.3	2.1	0.37	2	8.9	6	152.4	14	62.27	0.085	2.16	SST	N	FL
1.25	31.75	81092	4.5	114.3	3.4	0.6	2	8.9	7.5	190.5	28	124.54	0.095	2.41	MW	N	FL
1.25	31.75	81092S	4.5	114.3	2.9	0.51	2	8.9	5.8	147.32	19	84.51	0.095	2.41	SST	N	FL
1.25	31.75	81102	4.5	114.3	7.3	1.28	3	13.34	4.7	119.38	38	169.02	0.105	2.67	MW	N	FL
1.25	31.75	81102S	4.5	114.3	6.2	1.09	3	13.34	3.6	91.44	26	115.65	0.105	2.67	SST	N	FL
1.25	31.75	81111	4.5	114.3	8.8	1.54	4	17.79	4.8	121.92	47	209.06	0.115	2.92	MW	N	FL
1.25	31.75	81111S	4.5	114.3	7.5	1.31	3	13.34	3.7	93.98	31	137.89	0.115	2.92	SST	N	FL
1.25	31.75	81122	4.5	114.3	20	3.5	6	26.69	3.3	83.82	73	324.7	0.135	3.43	MW	N	FL
1.25	31.75	81122S	4.5	114.3	17	2.98	5	22.24	2.4	60.96	47	209.06	0.135	3.43	SST	N	FL
1.25	31.75	81131	4.5	114.3	34	5.95	8	35.58	2.6	66.04	95	422.56	0.148	3.76	MW	N	FL
1.25	31.75	81131S	4.5	114.3	29	5.08	7	31.14	1.9	48.26	62	275.78	0.148	3.76	SST	N	FL
1.25	31.75	5687	4.5	114.3	101	17.68	42	186.82	1.1	27.94	151	671.65	0.187	4.75	SPR	GI	MH
1.25	31.75	81084	5	127	2	0.35	2	8.9	9.6	243.84	21	93.41	0.085	2.16	MW	N	FL
1.25	31.75	81084S	5	127	1.7	0.3	2	8.9	7.5	190.5	14	62.27	0.085	2.16	SST	N	FL
1.25	31.75	81093	5	127	2.8	0.49	2	8.9	9.3	236.22	28	124.54	0.095	2.41	MW	N	FL
1.25	31.75	81093S	5	127	2.3	0.4	2	8.9	7.2	182.88	19	84.51	0.095	2.41	SST	N	FL
1.25	31.75	81103	5	127	6	1.05	3	13.34	5.7	144.78	38	169.02	0.105	2.67	MW	N	FL
1.25	31.75	81103S	5	127	5.1	0.89	3	13.34	4.4	111.76	26	115.65	0.105	2.67	SST	N	FL
1.25	31.75	81112	5	127	7.2	1.26	4	17.79	5.9	149.86	47	209.06	0.115	2.92	MW	N	FL
1.25	31.75	81112S	5	127	6.1	1.07	3	13.34	4.5	114.3	31	137.89	0.115	2.92	SST	N	FL
1.25	31.75	81123	5	127	17	2.98	6	26.69	4	101.6	73	324.7	0.135	3.43	MW	N	FL
1.25	31.75	81123S	5	127	14	2.45	5	22.24	2.9	73.66	47	209.06	0.135	3.43	SST	N	FL
1.25	31.75	81132	5	127	28	4.9	8	35.58	3.1	78.74	95	422.56	0.148	3.76	MW	N	FL
1.25	31.75	81132S	5	127	24	4.2	7	31.14	2.3	58.42	62	275.78	0.148	3.76	SST	N	FL
1.25	31.75	81085	5.5	139.7	1.7	0.3	2	8.9	11	279.4	21	93.41	0.085	2.16	MW	N	FL
1.25	31.75	81085S	5.5	139.7	1.4	0.25	2	8.9	8.8	223.52	14	62.27	0.085	2.16	SST	N	FL
1.25	31.75	81094	5.5	139.7	2.3	0.4	2	8.9	11	279.4	28	124.54	0.095	2.41	MW	N	FL
1.25	31.75	81094S	5.5	139.7	2	0.35	2	8.9	8.6	218.44	19	84.51	0.095	2.41	SST	N	FL
1.25	31.75	81104	5.5	139.7	5.1	0.89	3	13.34	6.8	172.72	38	169.02	0.105	2.67	MW	N	FL
1.25	31.75	81104S	5.5	139.7	4.3	0.75	3	13.34	5.2	132.08	26	115.65	0.105	2.67	SST	N	FL
1.25	31.75	81113	5.5	139.7	6.1	1.07	4	17.79	7	177.8	47	209.06	0.115	2.92	MW	N	FL
1.25	31.75	81113S	5.5	139.7	5.2	0.91	3	13.34	5.3	134.62	31	137.89	0.115	2.92	SST	N	FL
1.25	31.75	81124	5.5	139.7	14	2.45	6	26.69	4.7	119.38	73	324.7	0.135	3.43	MW	N	FL
1.25	31.75	81124S	5.5	139.7	12	2.1	5	22.24	3.5	88.9	47	209.06	0.135	3.43	SST	N	FL
1.25	31.75	81133	5.5	139.7	23	4.03	8	35.58	3.7	93.98	95	422.56	0.148	3.76	MW	N	FL
1.25	31.75	81133S	5.5	139.7	20	3.5	7	31.14	2.8	71.12	62	275.78	0.148	3.76	SST	N	FL
1.25	31.75	81086	6	152.4	1.5	0.26	2	8.9	13	330.2	21	93.41	0.085	2.16	MW	N	FL
1.25	31.75	81086S	6	152.4	1	0.18	2	8.9	10	254	14	62.27	0.085	2.16	SST	N	FL
1.25	31.75	81095	6	152.4	2	0.35	2	8.9	13	330.2	28	124.54	0.095	2.41	MW	N	FL
1.25	31.75	81095S	6	152.4	1.7	0.3	2	8.9	9.9	251.46	19	84.51	0.095	2.41	SST	N	FL
1.25	31																




O.D. Inches mm	Century Stock Number	Length Inches mm	Rate Lbs./In. N/mm	Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm	Mat'l	F	E							
									in	sh							
1.25	31.75	81106	6.5	165.1	2.7	0.47	4	17.79	11	279.4	33.7	149.9	0.105	2.67	MW	N	FL
1.25	31.75	81106S	6.5	165.1	2.4	0.42	4	17.79	10.2	259.08	28	124.54	0.105	2.67	SST	N	FL
1.25	31.75	81115	6.5	165.1	4.7	0.82	4	17.79	9.1	231.14	47	209.06	0.115	2.92	MW	N	FL
1.25	31.75	81115S	6.5	165.1	4	0.7	3	13.34	6.9	175.26	31	137.89	0.115	2.92	SST	N	FL
1.25	31.75	81126	6.5	165.1	11	1.93	6	26.69	6.2	157.48	73	324.7	0.135	3.43	MW	N	FL
1.25	31.75	81126S	6.5	165.1	9.2	1.61	5	22.24	4.6	116.84	47	209.06	0.135	3.43	SST	N	FL
1.25	31.75	81135	6.5	165.1	18	3.15	8	35.58	4.9	124.46	95	422.56	0.148	3.76	MW	N	FL
1.25	31.75	81135S	6.5	165.1	15	2.63	7	31.14	3.6	91.44	62	275.78	0.148	3.76	SST	N	FL
1.25	31.75	630	6.5	165.1	26	4.55	23	102.3	3	76.2	100	444.8	0.162	4.11	HD	Z	MH
1.25	31.75	81088	7	177.8	1.2	0.21	2	8.9	16	406.4	21	93.41	0.085	2.16	MW	N	FL
1.25	31.75	81088S	7	177.8	1	0.18	2	8.9	13	330.2	14	62.27	0.085	2.16	SST	N	FL
1.25	31.75	81097	7	177.8	1.6	0.28	2	8.9	16	406.4	28	124.54	0.095	2.41	MW	N	FL
1.25	31.75	81097S	7	177.8	1.3	0.23	2	8.9	13	330.2	19	84.51	0.095	2.41	SST	N	FL
1.25	31.75	81107	7	177.8	3.5	0.61	3	13.34	9.8	248.92	38	169.02	0.105	2.67	MW	N	FL
1.25	31.75	81107S	7	177.8	3	0.53	3	13.34	7.6	193.04	26	115.65	0.105	2.67	SST	N	FL
1.25	31.75	81116	7	177.8	4.2	0.74	4	17.79	10	254	47	209.06	0.115	2.92	MW	N	FL
1.25	31.75	81116S	7	177.8	3.6	0.63	3	13.34	7.7	195.58	31	137.89	0.115	2.92	SST	N	FL
1.25	31.75	81127	7	177.8	9.7	1.7	6	26.69	6.9	175.26	73	324.7	0.135	3.43	MW	N	FL
1.25	31.75	81127S	7	177.8	8.2	1.44	5	22.24	5.1	129.54	47	209.06	0.135	3.43	SST	N	FL
1.25	31.75	81136	7	177.8	16	2.8	8	35.58	5.4	137.16	95	422.56	0.148	3.76	MW	N	FL
1.25	31.75	81136S	7	177.8	14	2.45	7	31.14	4.1	104.14	62	275.78	0.148	3.76	SST	N	FL
1.25	31.75	5523	7	177.8	22	3.85	23	102.3	5	127	133	591.58	0.162	4.11	MW	Z	MH
1.25	31.75	5485	7.25	184.15	1	0.18	2	8.9	15	381	17	75.62	0.09	2.29	SPR	Z	FL
1.25	31.75	12357	7.25	184.15	88	15.4	71	315.81	1.7	43.18	222	987.46	0.21	5.33	SPR	N	MH
1.25	31.75	81098	7.5	190.5	1.4	0.25	2	8.9	18	457.2	28	124.54	0.095	2.41	MW	N	FL
1.25	31.75	81098S	7.5	190.5	1.2	0.21	2	8.9	14	355.6	19	84.51	0.095	2.41	SST	N	FL
1.25	31.75	81117	7.5	190.5	3.8	0.67	4	17.79	11	279.4	47	209.06	0.115	2.92	MW	N	FL
1.25	31.75	81117S	7.5	190.5	3.2	0.56	3	13.34	8.6	218.44	31	137.89	0.115	2.92	SST	N	FL
1.25	31.75	81128	7.5	190.5	8.8	1.54	6	26.69	7.6	193.04	73	324.7	0.135	3.43	MW	N	FL
1.25	31.75	81128S	7.5	190.5	7.4	1.3	5	22.24	5.7	144.78	47	209.06	0.135	3.43	SST	N	FL
1.25	31.75	81137	7.5	190.5	15	2.63	8	35.58	6	152.4	95	422.56	0.148	3.76	MW	N	FL
1.25	31.75	81137S	7.5	190.5	12	2.1	7	31.14	4.5	114.3	62	275.78	0.148	3.76	SST	N	FL
1.25	31.75	5502	7.75	196.85	37	6.48	38	169.02	2.7	68.58	138	613.82	0.182	4.62	SPR	Z	FL
1.25	31.75	603	8	203.2	20	3.5	23	102.3	3.9	99.06	100	444.8	0.162	4.11	HD	Z	MH
1.25	31.75	626	8	203.2	32	5.6	33	146.78	3.2	81.28	134	596.03	0.177	4.5	HD	Z	MH
1.25	31.75	631	10	254	9.2	1.61	16	71.17	6.6	167.64	77	342.5	0.148	3.76	HD	Z	MH
1.25	31.75	686	11.8	299.72	2.6	0.46	6	26.69	13	330.2	40	177.92	0.12	3.05	HD	Z	DL
1.25	31.75	618	12	304.8	12	2.1	23	102.3	6.2	157.48	100	444.8	0.162	4.11	HD	Z	DL
1.25	31.75	726	14	355.6	10	1.75	23	102.3	7.5	190.5	100	444.8	0.162	4.11	HD	Z	MH
1.25	31.75	627	14	355.6	16	2.8	33	146.78	6.2	157.48	134	596.03	0.177	4.5	HD	Z	MH
1.25	31.75	4070	15.3	388.62	7.7	1.35	19	84.51	9	228.6	89	395.87	0.156	3.96	SPR	N	MH
1.25	31.75	4060	26.8	680.72	1.9	0.33	10	44.48	25	635	57	253.54	0.135	3.43	SPR	N	SH
1.281	32.537	5556	7	177.8	7.6	1.33	10	44.48	6	152.4	55	244.64	0.135	3.43	SPR	Z	MH
1.281	32.537	4061	26.8	680.72	2	0.35	11	48.93	25	635	61	271.33	0.139	3.53	SPR	N	MH
1.312	33.325	612	8	203.2	102	17.85	85	378.08	1.7	43.18	255	1134.24	0.225	5.72	HD	Z	MH
1.312	33.325	613	10.3	261.62	75	13.13	85	378.08	2.2	55.88	255	1134.24	0.225	5.72	HD	Z	MH
1.312	33.325	635	12	304.8	3.8	0.67	9	40.03	12	304.8	54	240.19	0.135	3.43	HD	Z	MH
1.375	34.925	5573	3.56	90.424	127	22.23	41	182.37	0.91	23.114	156	693.89	0.192	4.88	MW	Z	MH
1.375	34.925	647	5.38	136.652	545	95.38	211	938.53	0.55	13.97	512	227.38	0.283	7.19	HD	BO	MH
1.375	34.925	5780	5.5	139.7	24	4.2	18	80.06	3	76.2	89	395.87	0.162	4.11	SPR	Z	MH
1.375	34.925	648	5.75	146.05	209	36.58	107	475.94	0.97	24.638	310	1378.88	0.243	6.17	HD	BO	MH
1.375	34.925	5067	7.75	196.85	25	4.38	27	120.1	3.7	93.98	119	529.31	0.177	4.5	SPR	Z	MH
1.375	34.925	602	8	203.2	15	2.63	18	80.06	4.8	121.92	89	395.87	0.162	4.11	HD	Z	MH
1.375	34.925	623	14	355.6	18	3.15	38	169.02	6	152.4	149	662.75	0.192	4.88	HD	Z	MH
1.375	34.925	4008	15.8	401.32	14	2.45	34	151.23	7.2	182.88	136	604.93	0.187	4.75	SPR	Z	MH
1.375	34.925	4062	27	685.8	2.2	0.39	13	57.82	25	635	68	302.46	0.148	3.76	SPR	N	MH
1.406	35.712	5828	5.5	139.7	501	87.68	200	889.6	0.59	14.986	495	2201.76	0.283	7.19	SPR	Z	MH
1.406	35.712	S-638	12.8	325.12	46	8.05	69	306.91	2.9	73.66	202	898.5	0.225	5.72	SST	N	EH
1.421	36.093	S-641	6.75	171.45	2.9	0.51	5	22.24	9.7	246.38	33	146.78	0.12	3.05	SST	N	MH
1.453	36.906	4063	27	685.8	2.5	0.44	14	62.27	25	635	74	329.15	0.156	3.96	SPR	N	MH
1.5	38.1	5327	3.25	82.55	296	51.8	62	275.78	0.51	12.954	213	947.42	0.225	5.72	SPR	Z	MH
1.5	38.1	671	4	101.6	182	31.85	62	275.78	0.83	21.082	213	947.42	0.225	5.72	HD	Z	MH
1.5	38.1	81138	4.5	114.3	9.7	1.7	4	17.79	4.8	121.92	51	226.85	0.125	3.18	MW	N	FL
1.5	38.1	81138S	4.5	114.3	8.2	1.44	4	17.79	3.7	93.98	34	151.23	0.125	3.18	SST	N	FL
1.5	38.1	81146	4.5	114.3	24	4.2	7	31.14	3	76.2	80	355.84	0.148	3.76	MW	N	FL
1.5	38.1	81146S	4.5	114.3	21	3.68	6	26.69	2.2	55.88	52	231.3	0.148	3.76	SST	N	FL
1.5	38.1	81154S	4.5	114.3	60	10.5	11	48.93	2	50.8	132	587.14	0.177	4.5	MW	N	FL
1.5	38.1	81154S	4.5	114.3</													

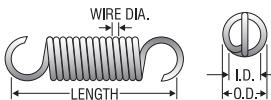


Century Spring

Extension Springs

O.D. Inches mm	Century Stock Number	Length		Rate		Initial Tension		Sugg Max. Defl.		Sugg Max. load		Wire Dia.		Mat'l	F nsh	E nds	
		Inches	mm	Lbs./In.	N/mm	Lbs.	N	Inches	mm	Lbs.	N	_inches	mm				
1.5	38.1	81156S	5.5	139.7	33	5.78	9	40.03	2.3	58.42	85	378.08	0.177	4.5	SST	N	FL
1.5	38.1	81141	6	152.4	5.2	0.91	4	17.79	9	228.6	51	226.85	0.125	3.18	MW	N	FL
1.5	38.1	81141S	6	152.4	4.4	0.77	4	17.79	6.8	172.72	34	151.23	0.125	3.18	SST	N	FL
1.5	38.1	81149	6	152.4	13	2.28	7	31.14	5.7	144.78	80	355.84	0.148	3.76	MW	N	FL
1.5	38.1	81149S	6	152.4	11	1.93	6	26.69	4.2	106.68	52	231.3	0.148	3.76	SST	N	FL
1.5	38.1	81157	6	152.4	33	5.78	11	48.93	3.7	93.98	132	587.14	0.177	4.5	MW	N	FL
1.5	38.1	81157S	6	152.4	28	4.9	9	40.03	2.7	68.58	85	378.08	0.177	4.5	SST	N	FL
1.5	38.1	81142	6.5	165.1	4.5	0.79	4	17.79	10	254	51	226.85	0.125	3.18	MW	N	FL
1.5	38.1	81142S	6.5	165.1	3.8	0.67	4	17.79	7.9	200.66	34	151.23	0.125	3.18	SST	N	FL
1.5	38.1	81150	6.5	165.1	11	1.93	7	31.14	6.5	165.1	80	355.84	0.148	3.76	MW	N	FL
1.5	38.1	81150S	6.5	165.1	9.5	1.66	6	26.69	4.9	124.46	52	231.3	0.148	3.76	SST	N	FL
1.5	38.1	81158	6.5	165.1	28	4.9	11	48.93	4.3	109.22	132	587.14	0.177	4.5	MW	N	FL
1.5	38.1	81158S	6.5	165.1	24	4.2	9	40.03	3.1	78.74	85	378.08	0.177	4.5	SST	N	FL
1.5	38.1	81143	7	177.8	4	0.7	4	17.79	12	304.8	51	226.85	0.125	3.18	MW	N	FL
1.5	38.1	81143S	7	177.8	3.4	0.6	4	17.79	8.9	226.06	34	151.23	0.125	3.18	SST	N	FL
1.5	38.1	81151	7	177.8	9.8	1.72	7	31.14	7.5	190.5	80	355.84	0.148	3.76	MW	N	FL
1.5	38.1	81151S	7	177.8	8.3	1.45	6	26.69	5.6	142.24	52	231.3	0.148	3.76	SST	N	FL
1.5	38.1	81159	7	177.8	25	4.38	11	48.93	4.8	121.92	132	587.14	0.177	4.5	MW	N	FL
1.5	38.1	81159S	7	177.8	21	3.68	9	40.03	3.5	88.9	85	378.08	0.177	4.5	SST	N	FL
1.5	38.1	661	7	177.8	112	19.6	87	386.98	1.7	43.18	275	1223.2	0.243	6.17	HD	Z	MH
1.5	38.1	5011	7.25	184.15	6.9	1.21	9	40.03	6.6	167.64	54	240.19	0.142	3.61	SPR	Z	MH
1.5	38.1	81144	7.5	190.5	3.5	0.61	4	17.79	13	330.2	51	226.85	0.125	3.18	MW	N	FL
1.5	38.1	81144S	7.5	190.5	3	0.53	4	17.79	10	254	34	151.23	0.125	3.18	SST	N	FL
1.5	38.1	81152	7.5	190.5	8.8	1.54	7	31.14	8.3	210.82	80	355.84	0.148	3.76	MW	N	FL
1.5	38.1	81152S	7.5	190.5	7.5	1.31	6	26.69	6.2	157.48	52	231.3	0.148	3.76	SST	N	FL
1.5	38.1	81160	7.5	190.5	23	4.03	11	48.93	5.4	137.16	132	587.14	0.177	4.5	MW	N	FL
1.5	38.1	81160S	7.5	190.5	19	3.33	9	40.03	3.9	99.06	85	378.08	0.177	4.5	SST	N	FL
1.5	38.1	81145	8	203.2	3.2	0.56	4	17.79	15	381	51	226.85	0.125	3.18	MW	N	FL
1.5	38.1	81145S	8	203.2	2.7	0.47	4	17.79	11	279.4	34	151.23	0.125	3.18	SST	N	FL
1.5	38.1	81153	8	203.2	7.9	1.38	7	31.14	9.3	236.22	80	355.84	0.148	3.76	MW	N	FL
1.5	38.1	81153S	8	203.2	6.7	1.17	6	26.69	6.9	175.26	52	231.3	0.148	3.76	SST	N	FL
1.5	38.1	81161	8	203.2	20	3.5	11	48.93	6	152.4	132	587.14	0.177	4.5	MW	N	FL
1.5	38.1	81161S	8	203.2	17	2.98	9	40.03	4.4	111.76	85	378.08	0.177	4.5	SST	N	FL
1.5	38.1	5057	8.25	209.55	26	4.55	31	137.89	3.9	99.06	133	591.58	0.192	4.88	SPR	Z	MH
1.5	38.1	5550	8.5	215.9	11	1.93	15	66.72	6.1	154.94	80	355.84	0.162	4.11	SPR	Z	MH
1.5	38.1	624	8.5	215.9	25	4.38	31	137.89	4	101.6	133	591.58	0.192	4.88	HD	Z	MH
1.5	38.1	660	11.5	292.1	2.7	0.47	7	31.14	15	381	47	209.06	0.135	3.43	HD	Z	DL
1.5	38.1	632	14	355.6	3.6	0.63	10	44.48	14	355.6	62	275.78	0.148	3.76	HD	Z	MH
1.5	38.1	628	14	355.6	9	1.58	22	97.86	9.4	238.76	107	475.94	0.177	4.5	HD	Z	MH
1.5	38.1	625	14	355.6	14	2.45	31	137.89	7.3	185.42	133	591.58	0.192	4.88	HD	Z	MH
1.5	38.1	5832	14.3	363.22	2.1	0.37	7	31.14	20	508	47	209.06	0.135	3.43	SPR	Z	MH
1.5	38.1	4075	17.5	444.5	17	2.98	43	191.26	7.6	193.04	170	756.16	0.207	5.26	SPR	Z	MH
1.5	38.1	4403	18	457.2	4.7	0.82	16	71.17	15	381	85	378.08	0.165	4.19	SPR	Z	MH
1.5	38.1	4401	19.4	492.76	4	0.7	15	66.72	16	406.4	80	355.84	0.162	4.11	SPR	Z	FL
1.5	38.1	4064	27	685.8	2.7	0.47	15	66.72	24	609.6	80	355.84	0.162	4.11	SPR	N	MH
1.546	39.268	5575	4.75	120.65	22	3.85	14	62.27	2.8	71.12	78	346.94	0.162	4.11	SPR	Z	MH
1.546	39.268	5504	4.75	120.65	25	4.38	16	71.17	2.7	68.58	85	378.08	0.167	4.24	SPR	Z	MH
1.593	40.462	4065	27.3	693.42	2.9	0.51	16	71.17	25	635	87	386.98	0.17	4.32	SPR	Z	DL
1.625	41.275	5139	4	101.6	145	25.38	51	226.85	0.99	25.146	196	871.81	0.225	5.72	SPR	Z	MH
1.625	41.275	5549	10.4	264.16	12	2.1	21	93.41	6.9	175.26	102	453.7	0.182	4.62	SPR	Z	MH
1.671	42.443	4066	27.3	693.42	3	0.53	17	75.62	25	635	94	418.11	0.177	4.5	SPR	N	MH
1.687	42.85	5615	8.5	215.9	6	1.05	10	44.48	8.8	223.52	62	275.78	0.156	3.96	SPR	Z	MH
1.718	43.637	4067	27.3	693.42	3.2	0.56	18	80.06	24	609.6	95	422.56	0.182	4.62	SPR	N	MH
1.75	44.45	81162	5	127	15	2.63	6	26.69	4.3	109.22	70	311.36	0.148	3.76	MW	N	FL
1.75	44.45	81162S	5	127	13	2.28	5	22.24	3.2	81.28	46	204.61	0.148	3.76	SST	N	FL
1.75	44.45	81170	5	127	37	6.48	10	44.48	2.9	73.66	114	507.07	0.177	4.5	MW	N	FL
1.75	44.45	81170S	5	127	31	5.43	8	35.58	2.1	53.34	73	324.7	0.177	4.5	SST	N	FL
1.75	44.45	81178	5	127	80	14	15	66.72	2	50.8	174	773.95	0.207	5.26	MW	N	FL
1.75	44.45	81178S	5	127	68	11.9	12	53.38	1.4	35.56	107	475.94	0.207	5.26	SST	N	FL
1.75	44.45	81163	5.5	139.7	12	2.1	6	26.69	5.6	142.24	70	311.36	0.148	3.76	MW	N	FL
1.75	44.45	81163S	5.5	139.7	9.8	1.72	5	22.24	4.2	106.68	46	204.61	0.148	3.76	SST	N	FL
1.75	44.45	81171	5.5	139.7	29	5.08	10	44.48	3.7	93.98	114	507.07	0.177	4.5	MW	N	FL
1.75	44.45	81171S	5.5	139.7	24	4.2	8	35.58	2.7	68.58	73	324.7	0.177	4.5	SST	N	FL
1.75	44.45	81179	5.5	139.7	63	11.03	15	66.72	2.5	63.5	174	773.95	0.207	5.26	MW	N	FL
1.75	44.45	81179S	5.5	139.7	54	9.45	12	53.38	1.8	45.72	107	475.94	0.207	5.26	SST	N	FL
1.75	44.45	5620	5.88	149.352	28	4.9	22	97.86	3.2	81.28	110	489.28	0.192	4.88	SPR	Z	MH
1.75	44.45	81164	6	152.4	8	1.4	5	22.24	5.1	129.54	46	204.61	0.148	3.76	SST	N	FL
1.75	44.45	81164S	6	152.4	23	4.03	10	44.48	4.5</td								




O.D. Inches mm	Century Stock Number	Length Inches mm	Rate Lbs./In. N/mm	Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. load Lbs. N	Wire Dia. Inches mm	Mat'l	F	E							
									in	Ends							
1.75	44.45	81174	7	177.8	17	2.98	10	44.48	6.1	154.94	114	507.07	0.177	4.5	MW	N	FL
1.75	44.45	81174S	7	177.8	15	2.63	8	35.58	4.5	114.3	73	324.7	0.177	4.5	SST	N	FL
1.75	44.45	81182	7	177.8	39	6.83	15	66.72	4.1	104.14	174	773.95	0.207	5.26	MW	N	FL
1.75	44.45	81182S	7	177.8	33	5.78	12	53.38	2.9	73.66	107	475.94	0.207	5.26	SST	N	FL
1.75	44.45	5637	7	177.8	79	13.83	61	271.33	2.2	55.88	232	1031.94	0.244	6.2	SPR	Z	MH
1.75	44.45	81167	7.5	190.5	6	1.05	6	26.69	11	279.4	70	311.36	0.148	3.76	MW	N	FL
1.75	44.45	81167S	7.5	190.5	5.1	0.89	5	22.24	8.1	205.74	46	204.61	0.148	3.76	SST	N	FL
1.75	44.45	81175	7.5	190.5	15	2.63	10	44.48	6.9	175.26	114	507.07	0.177	4.5	MW	N	FL
1.75	44.45	81175S	7.5	190.5	13	2.28	8	35.58	5.1	129.54	73	324.7	0.177	4.5	SST	N	FL
1.75	44.45	81183	7.5	190.5	34	5.95	15	66.72	4.7	119.38	174	773.95	0.207	5.26	MW	N	FL
1.75	44.45	81183S	7.5	190.5	29	5.08	12	53.38	3.3	83.82	107	475.94	0.207	5.26	SST	N	FL
1.75	44.45	81168	8	203.2	5.3	0.93	6	26.69	12	304.8	70	311.36	0.148	3.76	MW	N	FL
1.75	44.45	81168S	8	203.2	4.5	0.79	5	22.24	9.1	231.14	46	204.61	0.148	3.76	SST	N	FL
1.75	44.45	81176	8	203.2	14	2.45	10	44.48	7.8	198.12	114	507.07	0.177	4.5	MW	N	FL
1.75	44.45	81176S	8	203.2	11	1.93	8	35.58	5.7	144.78	73	324.7	0.177	4.5	SST	N	FL
1.75	44.45	81184	8	203.2	31	5.43	15	66.72	5.2	132.08	174	773.95	0.207	5.26	MW	N	FL
1.75	44.45	81184S	8	203.2	26	4.55	12	53.38	3.6	91.44	107	475.94	0.207	5.26	SST	N	FL
1.75	44.45	614	8	203.2	27	4.73	30	133.44	4.1	104.14	141	627.17	0.207	5.26	HD	Z	MH
1.75	44.45	81169	9	228.6	4.4	0.77	6	26.69	15	381	70	311.36	0.148	3.76	MW	N	FL
1.75	44.45	81169S	9	228.6	3.7	0.65	5	22.24	11	279.4	46	204.61	0.148	3.76	SST	N	FL
1.75	44.45	81177	9	228.6	11	1.93	10	44.48	9.3	236.22	114	507.07	0.177	4.5	MW	N	FL
1.75	44.45	81177S	9	228.6	9.5	1.66	8	35.58	6.8	172.72	73	324.7	0.177	4.5	SST	N	FL
1.75	44.45	81185	9	228.6	25	4.38	15	66.72	6.3	160.02	174	773.95	0.207	5.26	MW	N	FL
1.75	44.45	81185S	9	228.6	22	3.85	12	53.38	4.4	111.76	107	475.94	0.207	5.26	SST	N	FL
1.75	44.45	629	14	355.6	5.4	0.95	16	71.17	13	330.2	89	395.87	0.177	4.5	HD	Z	MH
1.75	44.45	620	14	355.6	12	2.1	30	133.44	8.9	226.06	141	627.17	0.207	5.26	HD	Z	MH
1.765	44.831	4068	27.3	693.42	3.4	0.6	19	84.51	24	609.6	100	444.8	0.187	4.75	SPR	N	MH
1.812	46.025	5694	6.25	158.75	51	8.93	40	177.92	2.6	66.04	171	760.61	0.225	5.72	SPR	N	MH
1.875	47.625	5695	5.31	134.874	8.2	1.44	8	35.58	5.9	149.86	56	249.09	0.156	3.96	SPR	N	MH
1.875	47.625	6070	7.63	193.802	624	109.2	345	1534.56	0.88	22.352	892	3967.62	0.375	9.53	OT	Z	MH
1.875	47.625	5381	11.5	292.1	127	22.23	152	676.1	2.3	58.42	448	1992.7	0.312	7.92	SPR	N	MH
1.921	48.793	4069	27.5	698.5	3.6	0.63	21	93.41	25	635	113	502.62	0.2	5.08	SPR	N	MH
1.938	49.225	4004	8.25	209.55	50	8.75	54	240.19	3.4	86.36	221	983.01	0.25	6.35	HD	BO	MH
1.968	49.987	5562	9.5	241.3	17	2.98	27	120.1	6.3	160.02	138	613.82	0.215	5.46	SPR	Z	MH
2	50.8	81186	5.5	139.7	24	4.2	8	35.58	3.9	99.06	102	453.7	0.177	4.5	MW	N	FL
2	50.8	81186S	5.5	139.7	21	3.68	7	31.14	2.9	73.66	66	293.57	0.177	4.5	SST	N	FL
2	50.8	81194	5.5	139.7	53	9.28	13	57.82	2.7	68.58	153	680.54	0.207	5.26	MW	N	FL
2	50.8	81194S	5.5	139.7	45	7.88	11	48.93	1.9	48.26	95	422.56	0.207	5.26	SST	N	FL
2	50.8	81187	6	152.4	19	3.33	8	35.58	5	127	102	453.7	0.177	4.5	MW	N	FL
2	50.8	81187S	6	152.4	16	2.8	7	31.14	3.7	93.98	66	293.57	0.177	4.5	SST	N	FL
2	50.8	81195	6	152.4	41	7.18	13	57.82	3.4	86.36	153	680.54	0.207	5.26	MW	N	FL
2	50.8	81195S	6	152.4	35	6.13	11	48.93	2.4	60.96	95	422.56	0.207	5.26	SST	N	FL
2	50.8	81188	6.5	165.1	15	2.63	8	35.58	6.2	157.48	102	453.7	0.177	4.5	MW	N	FL
2	50.8	81188S	6.5	165.1	13	2.28	7	31.14	4.5	114.3	66	293.57	0.177	4.5	SST	N	FL
2	50.8	81196	6.5	165.1	34	5.95	13	57.82	4.2	106.68	153	680.54	0.207	5.26	MW	N	FL
2	50.8	81196S	6.5	165.1	29	5.08	11	48.93	2.9	73.66	95	422.56	0.207	5.26	SST	N	FL
2	50.8	81189	7	177.8	13	2.28	8	35.58	7.3	185.42	102	453.7	0.177	4.5	MW	N	FL
2	50.8	81189S	7	177.8	11	1.93	7	31.14	5.4	137.16	66	293.57	0.177	4.5	SST	N	FL
2	50.8	81197	7	177.8	29	5.08	13	57.82	4.9	124.46	153	680.54	0.207	5.26	MW	N	FL
2	50.8	81197S	7	177.8	24	4.2	11	48.93	3.4	86.36	95	422.56	0.207	5.26	SST	N	FL
2	50.8	81190	7.5	190.5	11	1.93	8	35.58	8.5	215.9	102	453.7	0.177	4.5	MW	N	FL
2	50.8	81190S	7.5	190.5	9.4	1.65	7	31.14	6.2	157.48	66	293.57	0.177	4.5	SST	N	FL
2	50.8	81198	7.5	190.5	25	4.38	13	57.82	5.6	142.24	153	680.54	0.207	5.26	MW	N	FL
2	50.8	81198S	7.5	190.5	21	3.68	11	48.93	4	101.6	95	422.56	0.207	5.26	SST	N	FL
2	50.8	12336	7.5	190.5	18	3.15	23	102.3	5.4	137.16	122	542.66	0.208	5.28	SPR	Z	MH
2	50.8	81191	8	203.2	9.8	1.72	8	35.58	9.6	243.84	102	453.7	0.177	4.5	MW	N	FL
2	50.8	81191S	8	203.2	8.3	1.45	7	31.14	7.1	180.34	66	293.57	0.177	4.5	SST	N	FL
2	50.8	81199	8	203.2	22	3.85	13	57.82	6.4	162.56	153	680.54	0.207	5.26	MW	N	FL
2	50.8	81199S	8	203.2	19	3.33	11	48.93	4.5	114.3	95	422.56	0.207	5.26	SST	N	FL
2	50.8	621	8	203.2	18	3.15	22	97.86	5.4	137.16	120	533.76	0.207	5.26	HD	Z	MH
2	50.8	81192	9	228.6	7.9	1.38	8	35.58	12	304.8	102	453.7	0.177	4.5	MW	N	FL
2	50.8	81192S	9	228.6	6.7	1.17	7	31.14	8.8	223.52	66	293.57	0.177	4.5	SST	N	FL
2	50.8	81200	9	228.6	18	3.15	13	57.82	7.9	200.66	153	680.54	0.207	5.26	MW	N	FL
2	50.8	81200S	9	228.6	15	2.63	11	48.93	5.5	139.7	95	422.56	0.207	5.26	SST	N	FL
2	50.8	81193	10	254	6.6	1.16	8	35.58	14	355.6	102	453.7	0.177	4.5	MW	N	FL
2	50.8	81193S	10	254	5.6	0.98	7	31.14	10	254	66	293.57	0.177	4.5	SST	N	FL
2	50.8	81201	10	254	15	2.63	13	57.82	9.4	238.76	153	680.54	0.207	5.26	MW	N	FL
2	50.8	81201S	10	254	13	2.28	11	48.93	6.6	167.64	95	422.56	0.207	5.26	SST	N	FL
2	50.																

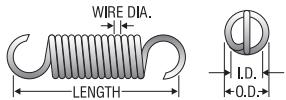

316 Stainless Steel Extension Springs


316 Stainless Steel Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm	Rate Lbs./In. N/mm	Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Wire Dia. Inches mm	Mat'l	Finish F n s h	Ends E n d s							
0.063	1.600	90000S	0.250	6.350	0.83	0.15	0.02	0.11	0.104	2.653	0.11	0.498	0.007	0.18	316 SS	P	FL
0.063	1.600	90001S	0.313	7.950	0.57	0.1	0.02	0.11	0.151	3.845	0.11	0.498	0.007	0.18	316 SS	P	FL
0.063	1.600	90002S	0.375	9.530	0.44	0.08	0.02	0.11	0.197	5.006	0.11	0.498	0.007	0.18	316 SS	P	FL
0.063	1.600	90003S	0.438	11.130	0.36	0.06	0.02	0.11	0.243	6.170	0.11	0.498	0.007	0.18	316 SS	P	FL
0.063	1.600	90004S	0.500	12.700	0.3	0.05	0.02	0.11	0.290	7.370	0.11	0.498	0.007	0.18	316 SS	P	FL
0.063	1.600	90005S	0.250	6.350	1.67	0.29	0.03	0.15	0.075	1.893	0.16	0.701	0.008	0.2	316 SS	P	FL
0.063	1.600	90006S	0.313	7.950	1.17	0.2	0.03	0.15	0.106	2.705	0.16	0.701	0.008	0.2	316 SS	P	FL
0.063	1.600	90007S	0.375	9.530	0.92	0.16	0.03	0.15	0.136	3.442	0.16	0.701	0.008	0.2	316 SS	P	FL
0.063	1.600	90008S	0.438	11.130	0.73	0.13	0.03	0.15	0.169	4.303	0.16	0.701	0.008	0.2	316 SS	P	FL
0.063	1.600	90009S	0.500	12.700	0.62	0.11	0.03	0.15	0.201	5.117	0.16	0.701	0.008	0.2	316 SS	P	FL
0.063	1.600	90010S	0.625	15.880	0.47	0.08	0.03	0.15	0.262	6.643	0.16	0.701	0.008	0.2	316 SS	P	FL
0.063	1.600	90011S	0.750	19.050	0.38	0.07	0.03	0.15	0.324	8.232	0.16	0.701	0.008	0.2	316 SS	P	FL
0.063	1.600	90012S	0.875	22.230	0.32	0.06	0.03	0.15	0.392	9.965	0.16	0.701	0.008	0.2	316 SS	P	FL
0.063	1.600	90013S	0.250	6.350	3.08	0.54	0.05	0.22	0.054	1.376	0.22	0.965	0.009	0.23	316 SS	P	FL
0.063	1.600	90014S	0.313	7.950	2.25	0.39	0.05	0.22	0.074	1.886	0.22	0.965	0.009	0.23	316 SS	P	FL
0.063	1.600	90015S	0.375	9.530	1.75	0.31	0.05	0.22	0.095	2.425	0.22	0.965	0.009	0.23	316 SS	P	FL
0.063	1.600	90016S	0.438	11.130	1.42	0.25	0.05	0.22	0.118	2.996	0.22	0.965	0.009	0.23	316 SS	P	FL
0.063	1.600	90017S	0.500	12.700	1.17	0.2	0.05	0.22	0.143	3.638	0.22	0.965	0.009	0.23	316 SS	P	FL
0.063	1.600	90018S	0.625	15.880	0.92	0.16	0.05	0.22	0.182	4.630	0.22	0.965	0.009	0.23	316 SS	P	FL
0.063	1.600	90019S	0.750	19.050	0.72	0.13	0.05	0.22	0.233	5.922	0.22	0.965	0.009	0.23	316 SS	P	FL
0.063	1.600	90020S	0.875	22.230	0.6	0.11	0.05	0.22	0.278	7.073	0.22	0.965	0.009	0.23	316 SS	P	FL
0.063	1.600	90021S	0.250	6.350	9.25	1.62	0.08	0.37	0.034	0.867	0.40	1.775	0.011	0.28	316 SS	P	FL
0.063	1.600	90022S	0.313	7.950	6.58	1.15	0.08	0.37	0.048	1.219	0.40	1.775	0.011	0.28	316 SS	P	FL
0.063	1.600	90023S	0.375	9.530	4.91	0.86	0.08	0.37	0.064	1.632	0.40	1.775	0.011	0.28	316 SS	P	FL
0.063	1.600	90024S	0.438	11.130	4	0.7	0.08	0.37	0.079	2.005	0.40	1.775	0.011	0.28	316 SS	P	FL
0.063	1.600	90025S	0.500	12.700	3.42	0.6	0.08	0.37	0.092	2.348	0.40	1.775	0.011	0.28	316 SS	P	FL
0.063	1.600	90026S	0.625	15.880	2.67	0.47	0.08	0.37	0.118	3.008	0.40	1.775	0.011	0.28	316 SS	P	FL
0.063	1.600	90027S	0.750	19.050	2.08	0.36	0.08	0.37	0.152	3.851	0.40	1.775	0.011	0.28	316 SS	P	FL
0.078	1.980	90028S	0.250	6.350	0.51	0.09	0.02	0.09	0.136	3.450	0.09	0.400	0.007	0.18	316 SS	P	FL
0.078	1.980	90029S	0.313	7.950	0.33	0.06	0.02	0.09	0.211	5.350	0.09	0.400	0.007	0.18	316 SS	P	FL
0.078	1.980	90030S	0.375	9.530	0.24	0.04	0.02	0.09	0.284	7.218	0.09	0.400	0.007	0.18	316 SS	P	FL
0.078	1.980	90031S	0.438	11.130	0.19	0.03	0.02	0.09	0.359	9.125	0.09	0.400	0.007	0.18	316 SS	P	FL
0.078	1.980	90032S	0.500	12.700	0.16	0.03	0.02	0.09	0.432	10.978	0.09	0.400	0.007	0.18	316 SS	P	FL
0.078	1.980	90033S	0.250	6.350	1.01	0.18	0.03	0.13	0.105	2.670	0.14	0.601	0.008	0.2	316 SS	P	FL
0.078	1.980	90034S	0.313	7.950	0.66	0.12	0.03	0.13	0.161	4.094	0.14	0.601	0.008	0.2	316 SS	P	FL
0.078	1.980	90035S	0.375	9.530	0.49	0.09	0.03	0.13	0.217	5.503	0.14	0.601	0.008	0.2	316 SS	P	FL
0.078	1.980	90036S	0.438	11.130	0.39	0.07	0.03	0.13	0.273	6.932	0.14	0.601	0.008	0.2	316 SS	P	FL
0.078	1.980	90037S	0.500	12.700	0.32	0.06	0.03	0.13	0.328	8.326	0.14	0.601	0.008	0.2	316 SS	P	FL
0.078	1.980	90038S	0.625	15.880	0.24	0.04	0.03	0.13	0.440	11.178	0.14	0.601	0.008	0.2	316 SS	P	FL
0.078	1.980	90039S	0.750	19.050	0.19	0.03	0.03	0.13	0.551	13.985	0.14	0.601	0.008	0.2	316 SS	P	FL
0.078	1.980	90040S	0.875	22.230	0.16	0.03	0.03	0.13	0.662	16.825	0.14	0.601	0.008	0.2	316 SS	P	FL
0.078	1.980	90041S	0.250	6.350	1.85	0.32	0.04	0.19	0.082	2.095	0.19	0.864	0.009	0.23	316 SS	P	FL
0.078	1.980	90042S	0.313	7.950	1.22	0.21	0.04	0.19	0.126	3.189	0.19	0.864	0.009	0.23	316 SS	P	FL
0.078	1.980	90043S	0.375	9.530	0.91	0.16	0.04	0.19	0.168	4.265	0.19	0.864	0.009	0.23	316 SS	P	FL
0.078	1.980	90044S	0.438	11.130	0.72	0.13	0.04	0.19	0.211	5.355	0.19	0.864	0.009	0.23	316 SS	P	FL
0.078	1.980	90045S	0.500	12.700	0.6	0.11	0.04	0.19	0.253	6.436	0.19	0.864	0.009	0.23	316 SS	P	FL
0.078	1.980	90046S	0.625	15.880	0.45	0.08	0.04	0.19	0.339	8.601	0.19	0.864	0.009	0.23	316 SS	P	FL
0.078	1.980	90047S	0.750	19.050	0.36	0.06	0.04	0.19	0.424	10.771	0.19	0.864	0.009	0.23	316 SS	P	FL
0.078	1.980	90048S	0.875	22.230	0.3	0.05	0.04	0.19	0.509	12.925	0.19	0.864	0.009	0.23	316 SS	P	FL
0.078	1.980	90049S	0.250	6.350	5.25	0.92	0.07	0.33	0.054	1.382	0.36	1.604	0.011	0.28	316 SS	P	FL
0.078	1.980	90050S	0.313	7.950	3.51	0.61	0.07	0.33	0.081	2.069	0.36	1.604	0.011	0.28	316 SS	P	FL
0.078	1.980	90051S	0.375	9.530	2.64	0.46	0.07	0.33	0.108	2.744	0.36	1.604	0.011	0.28	316 SS	P	FL
0.078	1.980	90052S	0.438	11.130	2.11	0.37	0.07	0.33	0.135	3.430	0.36	1.604	0.011	0.28	316 SS	P	FL
0.078	1.980	90053S	0.500	12.700	1.77	0.31	0.07	0.33	0.162	4.107	0.36	1.604	0.011	0.28	316 SS	P	FL
0.078	1.980	90054S	0.625	15.880	1.33	0.23	0.07	0.33	0.215	5.469	0.36	1.604	0.011	0.28	316 SS	P	FL

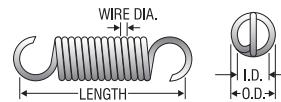

316 Stainless Steel Extension Springs

O.D. Inches mm	Century Stock Number	Length		Rate		Initial Tension		Sugg Max. Defl.	Sugg Max. Load	Wire Dia.		Mat'l	F n s h	E n d s	
		Inches	mm	Lbs./In.	N/mm	Lbs.	N	Inches	mm	Lbs.	N				
0.078	1.980	90055S	0.750	19.050	1.06	0.19	0.07	0.33	0.269	6.834	0.36	1.604	0.011	0.28	316 SS P FL
0.078	1.980	90056S	0.875	22.230	0.88	0.15	0.07	0.33	0.323	8.198	0.36	1.604	0.011	0.28	316 SS P FL
0.094	2.390	90057S	0.375	9.530	1	0.18	0.04	0.19	0.168	4.278	0.21	0.934	0.010	0.25	316 SS P FL
0.094	2.390	90058S	0.438	11.130	0.78	0.14	0.04	0.19	0.215	5.461	0.21	0.934	0.010	0.25	316 SS P FL
0.094	2.390	90059S	0.500	12.700	0.63	0.11	0.04	0.19	0.266	6.754	0.21	0.934	0.010	0.25	316 SS P FL
0.094	2.390	90060S	0.625	15.880	0.47	0.08	0.04	0.19	0.361	9.167	0.21	0.934	0.010	0.25	316 SS P FL
0.094	2.390	90061S	0.750	19.050	0.37	0.06	0.04	0.19	0.459	11.667	0.21	0.934	0.010	0.25	316 SS P FL
0.094	2.390	90062S	0.875	22.230	0.3	0.05	0.04	0.19	0.561	14.259	0.21	0.934	0.010	0.25	316 SS P FL
0.094	2.390	90063S	1.000	25.400	0.26	0.05	0.04	0.19	0.652	16.559	0.21	0.934	0.010	0.25	316 SS P FL
0.094	2.390	90064S	0.375	9.530	1.67	0.29	0.06	0.26	0.133	3.380	0.28	1.245	0.011	0.28	316 SS P FL
0.094	2.390	90065S	0.438	11.130	1.27	0.22	0.06	0.26	0.174	4.418	0.28	1.245	0.011	0.28	316 SS P FL
0.094	2.390	90066S	0.500	12.700	1.05	0.18	0.06	0.26	0.211	5.365	0.28	1.245	0.011	0.28	316 SS P FL
0.094	2.390	90067S	0.625	15.880	0.77	0.14	0.06	0.26	0.286	7.269	0.28	1.245	0.011	0.28	316 SS P FL
0.094	2.390	90068S	0.750	19.050	0.61	0.11	0.06	0.26	0.365	9.260	0.28	1.245	0.011	0.28	316 SS P FL
0.094	2.390	90069S	0.875	22.230	0.5	0.09	0.06	0.26	0.444	11.266	0.28	1.245	0.011	0.28	316 SS P FL
0.094	2.390	90070S	1.000	25.400	0.43	0.08	0.06	0.26	0.515	13.075	0.28	1.245	0.011	0.28	316 SS P FL
0.094	2.390	90071S	0.375	9.530	2.67	0.47	0.08	0.37	0.100	2.541	0.35	1.557	0.012	0.3	316 SS P FL
0.094	2.390	90072S	0.438	11.130	2	0.35	0.08	0.37	0.133	3.388	0.35	1.557	0.012	0.3	316 SS P FL
0.094	2.390	90073S	0.500	12.700	1.67	0.29	0.08	0.37	0.160	4.066	0.35	1.557	0.012	0.3	316 SS P FL
0.094	2.390	90074S	0.625	15.880	1.25	0.22	0.08	0.37	0.213	5.422	0.35	1.557	0.012	0.3	316 SS P FL
0.094	2.390	90075S	0.750	19.050	1	0.18	0.08	0.37	0.267	6.777	0.35	1.557	0.012	0.3	316 SS P FL
0.094	2.390	90076S	0.875	22.230	0.8	0.14	0.08	0.37	0.334	8.471	0.35	1.557	0.012	0.3	316 SS P FL
0.094	2.390	90077S	1.000	25.400	0.68	0.12	0.08	0.37	0.390	9.917	0.35	1.557	0.012	0.3	316 SS P FL
0.094	2.390	90078S	0.375	9.530	4	0.7	0.11	0.48	0.082	2.091	0.44	1.946	0.013	0.33	316 SS P FL
0.094	2.390	90079S	0.438	11.130	3.08	0.54	0.11	0.48	0.107	2.713	0.44	1.946	0.013	0.33	316 SS P FL
0.094	2.390	90080S	0.500	12.700	2.58	0.45	0.11	0.48	0.127	3.238	0.44	1.946	0.013	0.33	316 SS P FL
0.094	2.390	90081S	0.625	15.880	1.88	0.33	0.11	0.48	0.175	4.442	0.44	1.946	0.013	0.33	316 SS P FL
0.094	2.390	90082S	0.750	19.050	1.5	0.26	0.11	0.48	0.220	5.577	0.44	1.946	0.013	0.33	316 SS P FL
0.094	2.390	90083S	0.875	22.230	1.25	0.22	0.11	0.48	0.263	6.692	0.44	1.946	0.013	0.33	316 SS P FL
0.094	2.390	90084S	1.000	25.400	1.06	0.19	0.11	0.48	0.311	7.904	0.44	1.946	0.013	0.33	316 SS P FL
0.094	2.390	90085S	0.375	9.530	5.91	1.04	0.14	0.63	0.065	1.647	0.53	2.335	0.014	0.36	316 SS P FL
0.094	2.390	90086S	0.438	11.130	4.58	0.8	0.14	0.63	0.084	2.126	0.53	2.335	0.014	0.36	316 SS P FL
0.094	2.390	90087S	0.500	12.700	3.83	0.67	0.14	0.63	0.100	2.541	0.53	2.335	0.014	0.36	316 SS P FL
0.094	2.390	90088S	0.625	15.880	2.83	0.5	0.14	0.63	0.135	3.438	0.53	2.335	0.014	0.36	316 SS P FL
0.094	2.390	90089S	0.750	19.050	2.25	0.39	0.14	0.63	0.170	4.330	0.53	2.335	0.014	0.36	316 SS P FL
0.094	2.390	90090S	0.875	22.230	1.83	0.32	0.14	0.63	0.209	5.314	0.53	2.335	0.014	0.36	316 SS P FL
0.094	2.390	90091S	1.000	25.400	1.58	0.28	0.14	0.63	0.242	6.153	0.53	2.335	0.014	0.36	316 SS P FL
0.094	2.390	90092S	0.375	9.530	11.83	2.07	0.16	0.7	0.053	1.359	0.79	3.518	0.016	0.41	316 SS P FL
0.094	2.390	90093S	0.438	11.130	9.16	1.6	0.16	0.7	0.069	1.754	0.79	3.518	0.016	0.41	316 SS P FL
0.094	2.390	90094S	0.500	12.700	7.66	1.34	0.16	0.7	0.083	2.097	0.79	3.518	0.016	0.41	316 SS P FL
0.094	2.390	90095S	0.625	15.880	5.66	0.99	0.16	0.7	0.112	2.837	0.79	3.518	0.016	0.41	316 SS P FL
0.094	2.390	90096S	0.750	19.050	4.41	0.77	0.16	0.7	0.143	3.640	0.79	3.518	0.016	0.41	316 SS P FL
0.094	2.390	90097S	0.875	22.230	3.67	0.64	0.16	0.7	0.173	4.385	0.79	3.518	0.016	0.41	316 SS P FL
0.094	2.390	90098S	1.000	25.400	3.08	0.54	0.16	0.7	0.205	5.214	0.79	3.518	0.016	0.41	316 SS P FL
0.109	2.770	90099S	0.375	9.530	0.68	0.12	0.04	0.19	0.208	5.291	0.18	0.819	0.010	0.25	316 SS P FL
0.109	2.770	90100S	0.438	11.130	0.51	0.09	0.04	0.19	0.279	7.086	0.18	0.819	0.010	0.25	316 SS P FL
0.109	2.770	90101S	0.500	12.700	0.41	0.07	0.04	0.19	0.348	8.846	0.18	0.819	0.010	0.25	316 SS P FL
0.109	2.770	90102S	0.625	15.880	0.29	0.05	0.04	0.19	0.489	12.410	0.18	0.819	0.010	0.25	316 SS P FL
0.109	2.770	90103S	0.750	19.050	0.23	0.04	0.04	0.19	0.629	15.969	0.18	0.819	0.010	0.25	316 SS P FL
0.109	2.770	90104S	0.875	22.230	0.19	0.03	0.04	0.19	0.767	19.478	0.18	0.819	0.010	0.25	316 SS P FL
0.109	2.770	90105S	1.000	25.400	0.16	0.03	0.04	0.19	0.910	23.104	0.18	0.819	0.010	0.25	316 SS P FL
0.109	2.770	90106S	0.375	9.530	1.12	0.2	0.05	0.24	0.172	4.364	0.25	1.094	0.011	0.28	316 SS P FL
0.109	2.770	90107S	0.438	11.130	0.84	0.15	0.05	0.24	0.229	5.817	0.25	1.094	0.011	0.28	316 SS P FL
0.109	2.770	90108S	0.500	12.700	0.67	0.12	0.05	0.24	0.285	7.251	0.25	1.094	0.011	0.28	316 SS P FL
0.109	2.770	90109S	0.625	15.880	0.48	0.08	0.05	0.24	0.399	10.124	0.25	1.094	0.011	0.28	316 SS P FL
0.109	2.770	90110S	0.750	19.050	0.37	0.07	0.05	0.24	0.512	13.004	0.25	1.094	0.011	0.28	316 SS P FL
0.109	2.770	90111S	0.875	22.230	0.31	0.05	0.05	0.24	0.626	15.901	0.25	1.094	0.011	0.28	316 SS P FL
0.109	2.770	90112S	1.000	25.400	0.26	0.05	0.05	0.24	0.738	18.755	0.25	1.094	0.011	0.28	316 SS P FL
0.109	2.770	90113S	0.375	9.530	1.75	0.31	0.07	0.31	0.142	3.617	0.32	1.424	0.012	0.3	316 SS P FL
0.109	2.770	90114S	0.438	11.130	1.32	0.23	0.07	0.31	0.189	4.802	0.32	1.424	0.012	0.3	316 SS P FL
0.109	2.770	90115S	0.500	12.700	1.06	0.19	0.07	0.31	0.235	5.970	0.32	1.424	0.012	0.3	316 SS P FL
0.109	2.770	90116S	0.625	15.880	0.76	0.13	0.07	0.31	0.328	8.322	0.32	1.424	0.012	0.3	316 SS P FL
0.109	2.770	90117S	0.750	19.050	0.59	0.1	0.07	0.31	0.420	10.668	0.32	1.424	0.012	0.3	316 SS P FL
0.109	2.770	90118S	0.875	22.230	0.49	0.09	0.07	0.31	0.513	13.024	0.32	1.424	0.012	0.3	316 SS P FL
0.109	2.770	90119S	1.000	25.400	0.41	0.07	0.07	0.31	0.605	15.366	0.32				

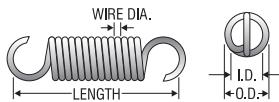


Century Spring

316 Stainless Steel Extension Springs


Extension Springs

O.D. Inches mm	Century Stock Number	Length		Rate		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Wire Dia.		Mat'l	F n s h	E n d s	
		Inches	mm	Lbs./In.	N/mm				_inches_	mm				
0.109	2.770	90130S	0.625	15.880	1.73	0.3	0.11	0.48	0.234	5.936	0.51	2.278	0.014	0.36
0.109	2.770	90131S	0.750	19.050	1.35	0.24	0.11	0.48	0.299	7.590	0.51	2.278	0.014	0.36
0.109	2.770	90132S	0.875	22.230	1.11	0.19	0.11	0.48	0.364	9.243	0.51	2.278	0.014	0.36
0.109	2.770	90133S	1.000	25.400	0.94	0.16	0.11	0.48	0.429	10.895	0.51	2.278	0.014	0.36
0.125	3.180	90134S	0.500	12.700	1.67	0.29	0.1	0.44	0.171	4.346	0.39	1.712	0.014	0.36
0.125	3.180	90135S	0.563	14.300	1.37	0.24	0.1	0.44	0.207	5.268	0.39	1.712	0.014	0.36
0.125	3.180	90136S	0.625	15.880	1.17	0.2	0.1	0.44	0.244	6.208	0.39	1.712	0.014	0.36
0.125	3.180	90137S	0.750	19.050	0.9	0.16	0.1	0.44	0.317	8.048	0.39	1.712	0.014	0.36
0.125	3.180	90138S	0.813	20.650	0.81	0.14	0.1	0.44	0.353	8.960	0.39	1.712	0.014	0.36
0.125	3.180	90139S	0.875	22.230	0.73	0.13	0.1	0.44	0.389	9.877	0.39	1.712	0.014	0.36
0.125	3.180	90140S	0.938	23.830	0.67	0.12	0.1	0.44	0.422	10.730	0.39	1.712	0.014	0.36
0.125	3.180	90141S	1.000	25.400	0.62	0.11	0.1	0.44	0.456	11.589	0.39	1.712	0.014	0.36
0.125	3.180	90142S	1.125	28.580	0.54	0.09	0.1	0.44	0.532	13.517	0.39	1.712	0.014	0.36
0.125	3.180	90143S	1.250	31.750	0.47	0.08	0.1	0.44	0.606	15.383	0.39	1.712	0.014	0.36
0.125	3.180	90144S	1.375	34.930	0.42	0.07	0.1	0.44	0.679	17.245	0.39	1.712	0.014	0.36
0.125	3.180	90145S	1.500	38.100	0.38	0.07	0.1	0.44	0.752	19.102	0.39	1.712	0.014	0.36
0.125	3.180	90146S	0.375	9.530	5.85	1.02	0.17	0.74	0.067	1.709	0.56	2.491	0.016	0.41
0.125	3.180	90147S	0.500	12.700	3.42	0.6	0.17	0.74	0.115	2.926	0.56	2.491	0.016	0.41
0.125	3.180	90148S	0.625	15.880	2.38	0.42	0.17	0.74	0.165	4.194	0.56	2.491	0.016	0.41
0.125	3.180	90149S	0.750	19.050	1.75	0.31	0.17	0.74	0.225	5.712	0.56	2.491	0.016	0.41
0.125	3.180	90150S	0.875	22.230	1.46	0.26	0.17	0.74	0.270	6.855	0.56	2.491	0.016	0.41
0.125	3.180	90151S	1.000	25.400	1.25	0.22	0.17	0.74	0.315	7.997	0.56	2.491	0.016	0.41
0.125	3.180	90152S	1.125	28.580	1.08	0.19	0.17	0.74	0.363	9.227	0.56	2.491	0.016	0.41
0.125	3.180	90153S	1.250	31.750	1	0.18	0.17	0.74	0.394	9.996	0.56	2.491	0.016	0.41
0.125	3.180	90154S	1.375	34.930	0.83	0.15	0.17	0.74	0.472	11.996	0.56	2.491	0.016	0.41
0.125	3.180	90155S	1.500	38.100	0.75	0.13	0.17	0.74	0.525	13.328	0.56	2.491	0.016	0.41
0.125	3.180	90156S	1.750	44.450	0.65	0.11	0.17	0.74	0.605	15.379	0.56	2.491	0.016	0.41
0.125	3.180	90157S	2.000	50.800	0.56	0.1	0.17	0.74	0.700	17.771	0.56	2.491	0.016	0.41
0.125	3.180	90158S	0.375	9.530	10.77	1.89	0.25	1.11	0.048	1.227	0.77	3.425	0.018	0.46
0.125	3.180	90159S	0.500	12.700	6.31	1.11	0.25	1.11	0.082	2.092	0.77	3.425	0.018	0.46
0.125	3.180	90160S	0.625	15.880	4.46	0.78	0.25	1.11	0.117	2.964	0.77	3.425	0.018	0.46
0.125	3.180	90161S	0.750	19.050	3.33	0.58	0.25	1.11	0.156	3.965	0.77	3.425	0.018	0.46
0.125	3.180	90162S	0.875	22.230	2.75	0.48	0.25	1.11	0.189	4.806	0.77	3.425	0.018	0.46
0.125	3.180	90163S	1.000	25.400	2.42	0.42	0.25	1.11	0.215	5.469	0.77	3.425	0.018	0.46
0.125	3.180	90164S	1.125	28.580	2.08	0.36	0.25	1.11	0.250	6.344	0.77	3.425	0.018	0.46
0.125	3.180	90165S	1.250	31.750	1.83	0.32	0.25	1.11	0.284	7.209	0.77	3.425	0.018	0.46
0.125	3.180	90166S	1.375	34.930	1.67	0.29	0.25	1.11	0.312	7.929	0.77	3.425	0.018	0.46
0.125	3.180	90167S	1.500	38.100	1.5	0.26	0.25	1.11	0.347	8.811	0.77	3.425	0.018	0.46
0.125	3.180	90168S	1.750	44.450	1.25	0.22	0.25	1.11	0.416	10.573	0.77	3.425	0.018	0.46
0.125	3.180	90169S	2.000	50.800	1.08	0.19	0.25	1.11	0.480	12.199	0.77	3.425	0.018	0.46
0.125	3.180	90170S	2.250	57.150	0.94	0.16	0.25	1.11	0.553	14.035	0.77	3.425	0.018	0.46
0.125	3.180	90171S	0.500	12.700	11.15	1.95	0.33	1.48	0.061	1.554	1.02	4.515	0.020	0.51
0.125	3.180	90172S	0.625	15.880	7.85	1.37	0.33	1.48	0.087	2.207	1.02	4.515	0.020	0.51
0.125	3.180	90173S	0.750	19.050	6.25	1.09	0.33	1.48	0.109	2.772	1.02	4.515	0.020	0.51
0.125	3.180	90174S	0.875	22.230	5	0.88	0.33	1.48	0.136	3.465	1.02	4.515	0.020	0.51
0.125	3.180	90175S	1.000	25.400	4.25	0.74	0.33	1.48	0.160	4.076	1.02	4.515	0.020	0.51
0.125	3.180	90176S	1.125	28.580	3.67	0.64	0.33	1.48	0.186	4.725	1.02	4.515	0.020	0.51
0.125	3.180	90177S	1.250	31.750	3.25	0.57	0.33	1.48	0.210	5.331	1.02	4.515	0.020	0.51
0.125	3.180	90178S	1.375	34.930	2.92	0.51	0.33	1.48	0.234	5.940	1.02	4.515	0.020	0.51
0.125	3.180	90179S	1.500	38.100	2.67	0.47	0.33	1.48	0.256	6.497	1.02	4.515	0.020	0.51
0.125	3.180	90180S	1.750	44.450	2.25	0.39	0.33	1.48	0.303	7.700	1.02	4.515	0.020	0.51
0.125	3.180	90181S	2.000	50.800	1.92	0.34	0.33	1.48	0.356	9.039	1.02	4.515	0.020	0.51
0.125	3.180	90182S	2.250	57.150	1.67	0.29	0.33	1.48	0.409	10.395	1.02	4.515	0.020	0.51
0.125	3.180	90183S	0.625	15.880	13.41	2.35	0.37	1.67	0.074	1.875	1.37	6.072	0.022	0.56
0.125	3.180	90184S	0.750	19.050	10.33	1.81	0.37	1.67	0.096	2.435	1.37	6.072	0.022	0.56
0.125	3.180	90185S	0.875	22.230	8.5	1.49	0.37	1.67	0.117	2.960	1.37	6.072	0.022	0.56
0.125	3.180	90186S	1.000	25.400	7.25	1.27	0.37	1.67	0.137	3.470	1.37	6.072	0.022	0.56
0.125	3.180	90187S	1.125	28.580	6.25	1.09	0.37	1.67	0.158	4.026	1.37	6.072	0.022	0.56
0.125	3.180	90188S	1.250	31.750	5.5	0.96	0.37	1.67	0.180	4.575	1.37	6.072	0.022	0.56
0.125	3.180	90189S	1.375	34.930	5	0.88	0.37	1.67	0.198	5.032	1.37	6.072	0.022	0.56
0.125	3.180	90190S	1.500	38.100	4.5	0.79	0.37	1.67	0.220	5.591	1.37	6.072	0.022	0.56
0.125	3.180	90191S	1.750	44.450	3.75	0.66	0.37	1.67	0.264	6.709	1.37	6.072	0.022	0.56
0.125	3.180	90192S	2.000	50.800	3.25	0.57	0.37	1.67	0.305	7.741	1.37	6.072	0.022	0.56
0.125	3.180	90193S	2.250	57.150	2.85	0.5	0.37	1.67	0.348	8.828	1.37	6.072	0.022	0.56
0.125	3.180	90194S	2.500	63.500	2.54	0.44	0.37	1.67	0.390	9.899	1.37	6.072	0.022	0.56
0.188	4.780	90195S	0.625	15.880	0.44	0.08	0.03	0.15	0.559	14.192	0.28	1.245	0.014	0.36
0.188	4.780	90196S	0.750	19.050	0.31	0.05	0.03	0.15	0.805	20.440	0.28	1.245	0.014	0.36
0.188	4.780	90197S	0.875	22.230	0.23	0.04	0.03	0.15	1.058	26.864	0.28	1.245	0.014	0.36
0.188	4.780	90198S	1.000	25.400	0.19	0.03	0.03	0.15	1.288	32.704	0.28	1.245	0.014	0.36

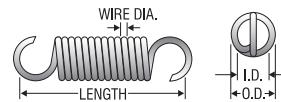

316 Stainless Steel Extension Springs


O.D. Inches mm	Century Stock Number	Length		Rate		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Wire Dia.		Mat'l	F n s h	E n d s				
		Inches	mm	Lbs./In.	N/mm				Inches	mm							
0.188	4.780	90205S	1.875	47.630	0.08	0.01	0.03	0.15	2.961	75.218	0.28	1.245	0.014	0.36	316 SS	P	FL
0.188	4.780	90206S	2.000	50.800	0.07	0.01	0.03	0.15	3.290	83.576	0.28	1.245	0.014	0.36	316 SS	P	FL
0.188	4.780	90207S	2.250	57.150	0.07	0.01	0.03	0.15	3.702	94.023	0.28	1.245	0.014	0.36	316 SS	P	FL
0.188	4.780	90208S	2.500	63.500	0.06	0.01	0.03	0.15	4.230	107.455	0.28	1.245	0.014	0.36	316 SS	P	FL
0.188	4.780	90209S	0.625	15.880	0.87	0.15	0.07	0.3	0.408	10.360	0.42	1.868	0.016	0.41	316 SS	P	FL
0.188	4.780	90210S	0.750	19.050	0.61	0.11	0.07	0.3	0.580	14.720	0.42	1.868	0.016	0.41	316 SS	P	FL
0.188	4.780	90211S	0.875	22.230	0.47	0.08	0.07	0.3	0.744	18.903	0.42	1.868	0.016	0.41	316 SS	P	FL
0.188	4.780	90212S	1.000	25.400	0.38	0.07	0.07	0.3	0.922	23.423	0.42	1.868	0.016	0.41	316 SS	P	FL
0.188	4.780	90213S	1.125	28.580	0.32	0.06	0.07	0.3	1.088	27.627	0.42	1.868	0.016	0.41	316 SS	P	FL
0.188	4.780	90214S	1.250	31.750	0.28	0.05	0.07	0.3	1.248	31.690	0.42	1.868	0.016	0.41	316 SS	P	FL
0.188	4.780	90215S	1.375	34.930	0.25	0.04	0.07	0.3	1.414	35.916	0.42	1.868	0.016	0.41	316 SS	P	FL
0.188	4.780	90216S	1.500	38.100	0.22	0.04	0.07	0.3	1.632	41.441	0.42	1.868	0.016	0.41	316 SS	P	FL
0.188	4.780	90217S	1.625	41.280	0.2	0.04	0.07	0.3	1.768	44.895	0.42	1.868	0.016	0.41	316 SS	P	FL
0.188	4.780	90218S	1.750	44.450	0.18	0.03	0.07	0.3	1.928	48.976	0.42	1.868	0.016	0.41	316 SS	P	FL
0.188	4.780	90219S	1.875	47.630	0.17	0.03	0.07	0.3	2.121	53.874	0.42	1.868	0.016	0.41	316 SS	P	FL
0.188	4.780	90220S	2.000	50.800	0.15	0.03	0.07	0.3	2.357	59.860	0.42	1.868	0.016	0.41	316 SS	P	FL
0.188	4.780	90221S	2.250	57.150	0.13	0.02	0.07	0.3	2.651	67.342	0.42	1.868	0.016	0.41	316 SS	P	FL
0.188	4.780	90222S	2.500	63.500	0.12	0.02	0.07	0.3	3.030	76.962	0.42	1.868	0.016	0.41	316 SS	P	FL
0.188	4.780	90223S	0.625	15.880	1.58	0.28	0.12	0.52	0.258	6.554	0.53	2.335	0.018	0.46	316 SS	P	FL
0.188	4.780	90224S	0.750	19.050	1.12	0.2	0.12	0.52	0.364	9.238	0.53	2.335	0.018	0.46	316 SS	P	FL
0.188	4.780	90225S	0.875	22.230	0.87	0.15	0.12	0.52	0.467	11.859	0.53	2.335	0.018	0.46	316 SS	P	FL
0.188	4.780	90226S	1.000	25.400	0.72	0.13	0.12	0.52	0.570	14.480	0.53	2.335	0.018	0.46	316 SS	P	FL
0.188	4.780	90227S	1.125	28.580	0.61	0.11	0.12	0.52	0.672	17.058	0.53	2.335	0.018	0.46	316 SS	P	FL
0.188	4.780	90228S	1.250	31.750	0.52	0.09	0.12	0.52	0.778	19.766	0.53	2.335	0.018	0.46	316 SS	P	FL
0.188	4.780	90229S	1.375	34.930	0.46	0.08	0.12	0.52	0.891	22.641	0.53	2.335	0.018	0.46	316 SS	P	FL
0.188	4.780	90230S	1.500	38.100	0.42	0.07	0.12	0.52	0.981	24.905	0.53	2.335	0.018	0.46	316 SS	P	FL
0.188	4.780	90231S	1.625	41.280	0.37	0.07	0.12	0.52	1.089	27.672	0.53	2.335	0.018	0.46	316 SS	P	FL
0.188	4.780	90232S	1.750	44.450	0.34	0.06	0.12	0.52	1.196	30.372	0.53	2.335	0.018	0.46	316 SS	P	FL
0.188	4.780	90233S	1.875	47.630	0.32	0.06	0.12	0.52	1.290	32.769	0.53	2.335	0.018	0.46	316 SS	P	FL
0.188	4.780	90234S	2.000	50.800	0.29	0.05	0.12	0.52	1.401	35.578	0.53	2.335	0.018	0.46	316 SS	P	FL
0.188	4.780	90235S	2.250	57.150	0.25	0.04	0.12	0.52	1.634	41.508	0.53	2.335	0.018	0.46	316 SS	P	FL
0.188	4.780	90236S	2.500	63.500	0.22	0.04	0.12	0.52	1.816	46.120	0.53	2.335	0.018	0.46	316 SS	P	FL
0.188	4.780	90237S	0.625	15.880	2.75	0.48	0.18	0.82	0.188	4.775	0.70	3.114	0.020	0.51	316 SS	P	FL
0.188	4.780	90238S	0.750	19.050	1.94	0.34	0.18	0.82	0.266	6.754	0.70	3.114	0.020	0.51	316 SS	P	FL
0.188	4.780	90239S	0.875	22.230	1.5	0.26	0.18	0.82	0.345	8.754	0.70	3.114	0.020	0.51	316 SS	P	FL
0.188	4.780	90240S	1.000	25.400	1.25	0.22	0.18	0.82	0.414	10.504	0.70	3.114	0.020	0.51	316 SS	P	FL
0.188	4.780	90241S	1.125	28.580	1.08	0.19	0.18	0.82	0.477	12.120	0.70	3.114	0.020	0.51	316 SS	P	FL
0.188	4.780	90242S	1.250	31.750	0.92	0.16	0.18	0.82	0.564	14.324	0.70	3.114	0.020	0.51	316 SS	P	FL
0.188	4.780	90243S	1.375	34.930	0.81	0.14	0.18	0.82	0.640	16.244	0.70	3.114	0.020	0.51	316 SS	P	FL
0.188	4.780	90244S	1.500	38.100	0.72	0.13	0.18	0.82	0.713	18.111	0.70	3.114	0.020	0.51	316 SS	P	FL
0.188	4.780	90245S	1.625	41.280	0.66	0.12	0.18	0.82	0.785	19.945	0.70	3.114	0.020	0.51	316 SS	P	FL
0.188	4.780	90246S	1.750	44.450	0.6	0.11	0.18	0.82	0.862	21.884	0.70	3.114	0.020	0.51	316 SS	P	FL
0.188	4.780	90247S	1.875	47.630	0.55	0.1	0.18	0.82	0.940	23.874	0.70	3.114	0.020	0.51	316 SS	P	FL
0.188	4.780	90248S	2.000	50.800	0.51	0.09	0.18	0.82	1.017	25.830	0.70	3.114	0.020	0.51	316 SS	P	FL
0.188	4.780	90249S	2.250	57.150	0.44	0.08	0.18	0.82	1.170	29.729	0.70	3.114	0.020	0.51	316 SS	P	FL
0.188	4.780	90250S	2.500	63.500	0.39	0.07	0.18	0.82	1.320	33.525	0.70	3.114	0.020	0.51	316 SS	P	FL
0.188	4.780	90251S	0.500	12.700	7.25	1.27	0.25	1.11	0.086	2.191	0.88	3.892	0.022	0.56	316 SS	P	MH
0.188	4.780	90252S	0.625	15.880	4.5	0.79	0.25	1.11	0.139	3.530	0.88	3.892	0.022	0.56	316 SS	P	MH
0.188	4.780	90253S	0.750	19.050	3.17	0.55	0.25	1.11	0.197	5.016	0.88	3.892	0.022	0.56	316 SS	P	MH
0.188	4.780	90254S	0.875	22.230	2.67	0.47	0.25	1.11	0.235	5.956	0.88	3.892	0.022	0.56	316 SS	P	MH
0.188	4.780	90255S	1.000	25.400	2.08	0.36	0.25	1.11	0.300	7.624	0.88	3.892	0.022	0.56	316 SS	P	MH
0.188	4.780	90256S	1.125	28.580	1.75	0.31	0.25	1.11	0.357	9.077	0.88	3.892	0.022	0.56	316 SS	P	MH
0.188	4.780	90257S	1.250	31.750	1.5	0.26	0.25	1.11	0.417	10.589	0.88	3.892	0.022	0.56	316 SS	P	MH
0.188	4.780	90258S	1.375	34.930	1.33	0.23	0.25	1.11	0.469	11.913	0.88	3.892	0.022	0.56	316 SS	P	MH
0.188	4.780	90259S	1.500	38.100	1.17	0.2	0.25	1.11	0.536	13.615	0.88	3.892	0.022	0.56	316 SS	P	MH
0.188	4.780	90260S	1.750	44.450	1	0.18	0.25	1.11	0.625	15.884	0.88	3.892	0.022	0.56	316 SS	P	MH
0.188	4.780	90261S	2.000	50.800	0.83	0.15	0.25	1.11	0.750	19.061	0.88	3.892	0.022	0.56	316 SS	P	MH
0.188	4.780	90262S	2.250	57.150	0.74	0.13	0.25	1.11	0.843	21.416	0.88	3.892	0.022	0.56	316 SS	P	MH
0.188	4.780	90263S	2.500	63.500	0.65	0.11	0.25	1.11	0.962	24.437	0.88	3.892	0.022	0.56	316 SS	P	MH
0.188	4.780	90264S	0.625	15.880	7.08	1.24	0.33	1.48	0.121	3.074	1.19	5.293	0.024	0.61	316 SS	P	MH
0.188	4.780	90265S	0.688	17.480	6	1.05	0.33	1.48	0.143	3.629	1.19	5.293	0				

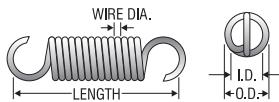

Century Spring


316 Stainless Steel Extension Springs

O.D. Inches mm	Century Stock Number	Length		Rate		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Wire Dia.		Mat'l	F n s h	E n d s	
		Inches	mm	Lbs./In.	N/mm				_inches_	mm				
0.188	4.780	90280S	0.625	15.880	10.52	1.84	0.42	1.85	0.103	2.628	1.51	6.694	0.026	0.66
0.188	4.780	90281S	0.750	19.050	7.91	1.39	0.42	1.85	0.138	3.494	1.51	6.694	0.026	0.66
0.188	4.780	90282S	0.875	22.230	6.16	1.08	0.42	1.85	0.177	4.485	1.51	6.694	0.026	0.66
0.188	4.780	90283S	1.000	25.400	5.08	0.89	0.42	1.85	0.214	5.441	1.51	6.694	0.026	0.66
0.188	4.780	90284S	1.125	28.580	4.25	0.74	0.42	1.85	0.256	6.508	1.51	6.694	0.026	0.66
0.188	4.780	90285S	1.250	31.750	3.75	0.66	0.42	1.85	0.290	7.376	1.51	6.694	0.026	0.66
0.188	4.780	90286S	1.375	34.930	3.33	0.58	0.42	1.85	0.327	8.298	1.51	6.694	0.026	0.66
0.188	4.780	90287S	1.500	38.100	2.92	0.51	0.42	1.85	0.373	9.483	1.51	6.694	0.026	0.66
0.188	4.780	90288S	1.750	44.450	2.42	0.42	0.42	1.85	0.451	11.445	1.51	6.694	0.026	0.66
0.188	4.780	90289S	2.000	50.800	2.08	0.36	0.42	1.85	0.523	13.276	1.51	6.694	0.026	0.66
0.188	4.780	90290S	2.250	57.150	1.83	0.32	0.42	1.85	0.594	15.087	1.51	6.694	0.026	0.66
0.188	4.780	90291S	2.500	63.500	1.61	0.28	0.42	1.85	0.677	17.197	1.51	6.694	0.026	0.66
0.188	4.780	90292S	0.625	15.880	18.66	3.27	0.62	2.78	0.075	1.913	2.03	9.029	0.029	0.74
0.188	4.780	90293S	0.688	17.480	15.99	2.8	0.62	2.78	0.088	2.232	2.03	9.029	0.029	0.74
0.188	4.780	90294S	0.750	19.050	13.99	2.45	0.62	2.78	0.100	2.551	2.03	9.029	0.029	0.74
0.188	4.780	90295S	0.813	20.650	12.41	2.17	0.62	2.78	0.113	2.876	2.03	9.029	0.029	0.74
0.188	4.780	90296S	0.875	22.230	10.91	1.91	0.62	2.78	0.129	3.271	2.03	9.029	0.029	0.74
0.188	4.780	90297S	0.938	23.830	10	1.75	0.62	2.78	0.141	3.571	2.03	9.029	0.029	0.74
0.188	4.780	90298S	1.000	25.400	9.16	1.6	0.62	2.78	0.153	3.895	2.03	9.029	0.029	0.74
0.188	4.780	90299S	1.125	28.580	7.73	1.35	0.62	2.78	0.182	4.617	2.03	9.029	0.029	0.74
0.188	4.780	90300S	1.250	31.750	6.74	1.18	0.62	2.78	0.209	5.297	2.03	9.029	0.029	0.74
0.188	4.780	90301S	1.375	34.930	5.97	1.05	0.62	2.78	0.235	5.976	2.03	9.029	0.029	0.74
0.188	4.780	90302S	1.500	38.100	5.36	0.94	0.62	2.78	0.262	6.654	2.03	9.029	0.029	0.74
0.188	4.780	90303S	1.750	44.450	4.44	0.78	0.62	2.78	0.317	8.039	2.03	9.029	0.029	0.74
0.188	4.780	90304S	2.000	50.800	3.8	0.67	0.62	2.78	0.370	9.397	2.03	9.029	0.029	0.74
0.188	4.780	90305S	2.250	57.150	3.34	0.58	0.62	2.78	0.421	10.686	2.03	9.029	0.029	0.74
0.188	4.780	90306S	2.500	63.500	2.95	0.52	0.62	2.78	0.477	12.104	2.03	9.029	0.029	0.74
0.188	4.780	90307S	0.500	12.700	43.32	7.59	0.71	3.15	0.040	1.021	2.45	10.898	0.031	0.79
0.188	4.780	90308S	0.625	15.880	26.42	4.63	0.71	3.15	0.066	1.675	2.45	10.898	0.031	0.79
0.188	4.780	90309S	0.750	19.050	20.08	3.52	0.71	3.15	0.087	2.204	2.45	10.898	0.031	0.79
0.188	4.780	90310S	0.875	22.230	15.83	2.77	0.71	3.15	0.110	2.796	2.45	10.898	0.031	0.79
0.188	4.780	90311S	1.000	25.400	13.16	2.3	0.71	3.15	0.132	3.362	2.45	10.898	0.031	0.79
0.188	4.780	90312S	1.125	28.580	11.25	1.97	0.71	3.15	0.155	3.935	2.45	10.898	0.031	0.79
0.188	4.780	90313S	1.250	31.750	9.75	1.71	0.71	3.15	0.179	4.540	2.45	10.898	0.031	0.79
0.188	4.780	90314S	1.375	34.930	8.66	1.52	0.71	3.15	0.201	5.107	2.45	10.898	0.031	0.79
0.188	4.780	90315S	1.500	38.100	7.66	1.34	0.71	3.15	0.227	5.773	2.45	10.898	0.031	0.79
0.188	4.780	90316S	1.750	44.450	6.41	1.12	0.71	3.15	0.272	6.898	2.45	10.898	0.031	0.79
0.188	4.780	90317S	2.000	50.800	5.5	0.96	0.71	3.15	0.317	8.048	2.45	10.898	0.031	0.79
0.188	4.780	90318S	2.250	57.150	4.75	0.83	0.71	3.15	0.367	9.319	2.45	10.898	0.031	0.79
0.188	4.780	90319S	2.500	63.500	4.25	0.74	0.71	3.15	0.410	10.415	2.45	10.898	0.031	0.79
0.188	4.780	90320S	2.750	69.850	3.75	0.66	0.71	3.15	0.465	11.804	2.45	10.898	0.031	0.79
0.188	4.780	90321S	0.625	15.880	44.4	7.78	0.75	3.33	0.054	1.373	3.15	14.011	0.034	0.86
0.188	4.780	90322S	0.750	19.050	33.32	5.84	0.75	3.33	0.072	1.830	3.15	14.011	0.034	0.86
0.188	4.780	90323S	0.875	22.230	25.82	4.52	0.75	3.33	0.093	2.361	3.15	14.011	0.034	0.86
0.188	4.780	90324S	1.000	25.400	21.66	3.79	0.75	3.33	0.111	2.815	3.15	14.011	0.034	0.86
0.188	4.780	90325S	1.125	28.580	18.66	3.27	0.75	3.33	0.129	3.267	3.15	14.011	0.034	0.86
0.188	4.780	90326S	1.250	31.750	16.08	2.82	0.75	3.33	0.149	3.792	3.15	14.011	0.034	0.86
0.188	4.780	90327S	1.375	34.930	14.33	2.51	0.75	3.33	0.168	4.255	3.15	14.011	0.034	0.86
0.188	4.780	90328S	1.500	38.100	12.91	2.26	0.75	3.33	0.186	4.722	3.15	14.011	0.034	0.86
0.188	4.780	90329S	1.750	44.450	10.75	1.88	0.75	3.33	0.223	5.674	3.15	14.011	0.034	0.86
0.188	4.780	90330S	2.000	50.800	9.16	1.6	0.75	3.33	0.262	6.654	3.15	14.011	0.034	0.86
0.188	4.780	90331S	2.250	57.150	8	1.4	0.75	3.33	0.300	7.624	3.15	14.011	0.034	0.86
0.188	4.780	90332S	2.500	63.500	7.08	1.24	0.75	3.33	0.339	8.611	3.15	14.011	0.034	0.86
0.188	4.780	90333S	2.750	69.850	6.33	1.11	0.75	3.33	0.379	9.630	3.15	14.011	0.034	0.86
0.250	6.350	90334S	0.625	15.880	1.06	0.19	0.08	0.37	0.285	7.244	0.39	1.712	0.018	0.46
0.250	6.350	90335S	0.750	19.050	0.62	0.11	0.08	0.37	0.489	12.432	0.39	1.712	0.018	0.46
0.250	6.350	90336S	0.875	22.230	0.44	0.08	0.08	0.37	0.683	17.358	0.39	1.712	0.018	0.46
0.250	6.350	90337S	1.000	25.400	0.34	0.06	0.08	0.37	0.883	22.438	0.39	1.712	0.018	0.46
0.250	6.350	90338S	1.125	28.580	0.28	0.05	0.08	0.37	1.065	27.057	0.39	1.712	0.018	0.46
0.250	6.350	90339S	1.250	31.750	0.23	0.04	0.08	0.37	1.294	32.855	0.39	1.712	0.018	0.46
0.250	6.350	90340S	1.375	34.930	0.21	0.04	0.08	0.37	1.449	36.798	0.39	1.712	0.018	0.46
0.250	6.350	90341S	1.500	38.100	0.17	0.03	0.08	0.37	1.725	43.807	0.39	1.712	0.018	0.46
0.250	6.350	90342S	1.750	44.450	0.14	0.02	0.08	0.37	2.130	54.115	0.39	1.712	0.018	0.46
0.250	6.350	90343S	2.000	50.800	0.12	0.02	0.08	0.37	2.587	65.711	0.39	1.712	0.018	0.46
0.250	6.350	90344S	2.250	57.150	0.11	0.02	0.08	0.37	2.786	70.765	0.39	1.712	0.018	0.46
0.250	6.350	90345S	2.500	63.500	0.09	0.02	0.08	0.37	3.293	83.632	0.39	1.712	0.018	0.46
0.250	6.350	90346S	2.750	69.850	0.08	0.01	0.08	0.37	3.622	91.995	0.39	1.712	0.018	0.46
0.250	6.350	90347S	0.625	15.880	2.75	0.48	0.17	0.74	0.207	5.252	0.74	3.269	0.022	0.56
0.250	6.350	90348S	0.750	19.050	1.67									

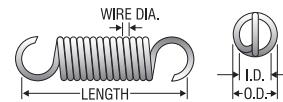

316 Stainless Steel Extension Springs

O.D. Inches mm	Century Stock Number	Length Inches mm	Rate Lbs./In. N/mm	Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Wire Dia. Inches mm	Mat'l	F in sh	E nd s							
0.250	6.350	90355S	1.750	44.450	0.42	0.07	0.17	0.74	1.365	34.664	0.74	3.269	0.022	0.56	316 SS	P	MH
0.250	6.350	90356S	2.000	50.800	0.33	0.06	0.17	0.74	1.706	43.329	0.74	3.269	0.022	0.56	316 SS	P	MH
0.250	6.350	90357S	2.250	57.150	0.3	0.05	0.17	0.74	1.895	48.144	0.74	3.269	0.022	0.56	316 SS	P	MH
0.250	6.350	90358S	2.500	63.500	0.27	0.05	0.17	0.74	2.132	54.162	0.74	3.269	0.022	0.56	316 SS	P	MH
0.250	6.350	90359S	2.750	69.850	0.23	0.04	0.17	0.74	2.437	61.899	0.74	3.269	0.022	0.56	316 SS	P	MH
0.250	6.350	90360S	0.500	12.700	16.91	2.96	0.33	1.48	0.044	1.129	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90361S	0.625	15.880	6.33	1.11	0.33	1.48	0.119	3.016	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90362S	0.750	19.050	4	0.7	0.33	1.48	0.188	4.776	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90363S	0.875	22.230	2.92	0.51	0.33	1.48	0.258	6.550	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90364S	1.000	25.400	2.33	0.41	0.33	1.48	0.322	8.187	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90365S	1.125	28.580	1.92	0.34	0.33	1.48	0.392	9.967	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90366S	1.250	31.750	1.58	0.28	0.33	1.48	0.475	12.065	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90367S	1.375	34.930	1.42	0.25	0.33	1.48	0.531	13.485	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90368S	1.500	38.100	1.25	0.22	0.33	1.48	0.602	15.283	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90369S	1.750	44.450	1	0.18	0.33	1.48	0.752	19.103	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90370S	2.000	50.800	0.83	0.15	0.33	1.48	0.903	22.924	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90371S	2.250	57.150	0.72	0.13	0.33	1.48	1.049	26.656	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90372S	2.500	63.500	0.63	0.11	0.33	1.48	1.188	30.163	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90373S	2.750	69.850	0.57	0.1	0.33	1.48	1.327	33.712	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90374S	3.000	76.200	0.5	0.09	0.33	1.48	1.504	38.207	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90375S	3.500	88.900	0.43	0.08	0.33	1.48	1.752	44.513	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90376S	4.000	101.600	0.37	0.06	0.33	1.48	2.037	51.747	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90377S	4.500	114.300	0.32	0.06	0.33	1.48	2.320	58.931	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90378S	5.000	127.000	0.29	0.05	0.33	1.48	2.608	66.254	1.09	4.826	0.026	0.66	316 SS	P	MH
0.250	6.350	90379S	0.625	15.880	10.91	1.91	0.46	2.04	0.096	2.437	1.51	6.694	0.029	0.74	316 SS	P	MH
0.250	6.350	90380S	0.750	19.050	6.58	1.15	0.46	2.04	0.159	4.041	1.51	6.694	0.029	0.74	316 SS	P	MH
0.250	6.350	90381S	0.875	22.230	5	0.88	0.46	2.04	0.209	5.320	1.51	6.694	0.029	0.74	316 SS	P	MH
0.250	6.350	90382S	1.000	25.400	3.92	0.69	0.46	2.04	0.267	6.792	1.51	6.694	0.029	0.74	316 SS	P	MH
0.250	6.350	90383S	1.125	28.580	3.25	0.57	0.46	2.04	0.322	8.185	1.51	6.694	0.029	0.74	316 SS	P	MH
0.250	6.350	90384S	1.250	31.750	2.83	0.5	0.46	2.04	0.370	9.388	1.51	6.694	0.029	0.74	316 SS	P	MH
0.250	6.350	90385S	1.375	34.930	2.42	0.42	0.46	2.04	0.433	11.007	1.51	6.694	0.029	0.74	316 SS	P	MH
0.250	6.350	90386S	1.500	38.100	2.12	0.37	0.46	2.04	0.493	12.518	1.51	6.694	0.029	0.74	316 SS	P	MH
0.250	6.350	90387S	1.750	44.450	1.75	0.31	0.46	2.04	0.598	15.200	1.51	6.694	0.029	0.74	316 SS	P	MH
0.250	6.350	90388S	2.000	50.800	1.5	0.26	0.46	2.04	0.698	17.734	1.51	6.694	0.029	0.74	316 SS	P	MH
0.250	6.350	90389S	2.250	57.150	1.33	0.23	0.46	2.04	0.785	19.950	1.51	6.694	0.029	0.74	316 SS	P	MH
0.250	6.350	90390S	2.500	63.500	1.14	0.2	0.46	2.04	0.917	23.300	1.51	6.694	0.029	0.74	316 SS	P	MH
0.250	6.350	90391S	2.750	69.850	1.02	0.18	0.46	2.04	1.030	26.165	1.51	6.694	0.029	0.74	316 SS	P	MH
0.250	6.350	90392S	3.000	76.200	0.92	0.16	0.46	2.04	1.142	29.019	1.51	6.694	0.029	0.74	316 SS	P	MH
0.250	6.350	90393S	3.500	88.900	0.77	0.13	0.46	2.04	1.362	34.584	1.51	6.694	0.029	0.74	316 SS	P	MH
0.250	6.350	90394S	4.000	101.600	0.66	0.12	0.46	2.04	1.581	40.152	1.51	6.694	0.029	0.74	316 SS	P	MH
0.250	6.350	90395S	4.500	114.300	0.58	0.1	0.46	2.04	1.803	45.797	1.51	6.694	0.029	0.74	316 SS	P	MH
0.250	6.350	90396S	5.000	127.000	0.52	0.09	0.46	2.04	2.024	51.402	1.51	6.694	0.029	0.74	316 SS	P	MH
0.250	6.350	90397S	0.625	15.880	15.69	2.75	0.58	2.59	0.079	2.002	1.82	8.095	0.031	0.79	316 SS	P	MH
0.250	6.350	90398S	0.750	19.050	10	1.75	0.58	2.59	0.124	3.143	1.82	8.095	0.031	0.79	316 SS	P	MH
0.250	6.350	90399S	0.875	22.230	7.33	1.28	0.58	2.59	0.169	4.286	1.82	8.095	0.031	0.79	316 SS	P	MH
0.250	6.350	90400S	1.000	25.400	5.75	1.01	0.58	2.59	0.215	5.466	1.82	8.095	0.031	0.79	316 SS	P	MH
0.250	6.350	90401S	1.125	28.580	4.75	0.83	0.58	2.59	0.261	6.617	1.82	8.095	0.031	0.79	316 SS	P	MH
0.250	6.350	90402S	1.250	31.750	4.08	0.71	0.58	2.59	0.303	7.697	1.82	8.095	0.031	0.79	316 SS	P	MH
0.250	6.350	90403S	1.375	34.930	3.58	0.63	0.58	2.59	0.345	8.771	1.82	8.095	0.031	0.79	316 SS	P	MH
0.250	6.350	90404S	1.500	38.100	3.17	0.55	0.58	2.59	0.391	9.925	1.82	8.095	0.031	0.79	316 SS	P	MH
0.250	6.350	90405S	1.750	44.450	2.5	0.44	0.58	2.59	0.495	12.572	1.82	8.095	0.031	0.79	316 SS	P	MH
0.250	6.350	90406S	2.000	50.800	2.17	0.38	0.58	2.59	0.571	14.506	1.82	8.095	0.031	0.79	316 SS	P	MH
0.250	6.350	90407S	2.250	57.150	1.83	0.32	0.58	2.59	0.675	17.144	1.82	8.095	0.031	0.79	316 SS	P	MH
0.250	6.350	90408S	2.500	63.500	1.67	0.29	0.58	2.59	0.742	18.858	1.82	8.095	0.031	0.79	316 SS	P	MH
0.250	6.350	90409S	2.750	69.850	1.46	0.26	0.58	2.59	0.848	21.552	1.82	8.095	0.031	0.79	316 SS	P	MH
0.250	6.350	90410S	3.000	76.200	1.31	0.23	0.58	2.59	0.946	24.023	1.82	8.095	0.031	0.79	316 SS	P	MH
0.250	6.350	90411S	3.500	88.900	1.1	0.19	0.58	2.59	1.125	28.573	1.82	8.095	0.031	0.79	316 SS	P	MH
0.250	6.350	90412S	4.000	101.600	0.95	0.17	0.58	2.59	1.303	33.084	1.82	8.095	0.031	0.79	316 SS	P	MH
0.250	6.350	90413S	4.500	114.300	0.83	0.15	0.58	2.59	1.485	37.716	1.82	8.095	0.031	0.79	316 SS	P	MH
0.250	6.350	90414S	5.000	127.000	0.74	0.13	0.58	2.59	1.668	42.377	1.82	8.095	0.031	0.79	316 SS	P	MH
0.250	6.350	90415S	0.625	15.880	23.66	4.14	0.71	3.15	0.071	1.795	2.38	10.586	0.034	0.86	316 SS	P	MH
0.250	6.350	90416S	0.750	19.050	14.83	2.6	0.71	3.15	0.113	2.864	2.38	10.586	0.034	0.86	316 SS	P	MH
0.250	6.350	90417S	0.875	22.230	11.25</td												

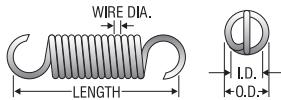

Century Spring


316 Stainless Steel Extension Springs

O.D. Inches mm	Century Stock Number	Length		Rate		Initial Tension Lbs. N	Sugg Max. Defl. Inches mm	Sugg Max. Load Lbs. N	Wire Dia.		Mat'l	F n s h	E n d s				
		Inches	mm	Lbs./In.	N/mm				Mat'l	mm	Mat'l						
0.250	6.350	90430S	4.000	101.600	1.57	0.27	0.71	3.15	1.068	27.118	2.38	10.586	0.034	0.86	316 SS	P	MH
0.250	6.350	90431S	4.500	114.300	1.37	0.24	0.71	3.15	1.216	30.898	2.38	10.586	0.034	0.86	316 SS	P	MH
0.250	6.350	90432S	5.000	127.000	1.22	0.21	0.71	3.15	1.365	34.681	2.38	10.586	0.034	0.86	316 SS	P	MH
0.250	6.350	90433S	0.625	15.880	37.24	6.52	1.89	8.41	0.084	2.121	5.00	22.240	0.038	0.94	316 SS	P	MH
0.250	6.350	90434S	0.750	19.050	24.24	4.25	1.89	8.41	0.128	3.259	5.00	22.240	0.038	0.94	316 SS	P	MH
0.250	6.350	90435S	1.000	25.400	14.74	2.58	1.89	8.41	0.211	5.358	5.00	22.240	0.038	0.94	316 SS	P	MH
0.250	6.350	90436S	1.125	28.580	12.5	2.19	1.89	8.41	0.249	6.322	5.00	22.240	0.038	0.94	316 SS	P	MH
0.250	6.350	90437S	1.250	31.750	10.58	1.85	1.89	8.41	0.294	7.467	5.00	22.240	0.038	0.94	316 SS	P	MH
0.250	6.350	90438S	1.375	34.930	9.16	1.6	1.89	8.41	0.339	8.621	5.00	22.240	0.038	0.94	316 SS	P	MH
0.250	6.350	90439S	1.500	38.100	8.08	1.42	1.89	8.41	0.385	9.776	5.00	22.240	0.038	0.94	316 SS	P	MH
0.250	6.350	90440S	1.750	44.450	6.66	1.17	1.89	8.41	0.467	11.854	5.00	22.240	0.038	0.94	316 SS	P	MH
0.250	6.350	90441S	2.000	50.800	5.58	0.98	1.89	8.41	0.557	14.154	5.00	22.240	0.038	0.94	316 SS	P	MH
0.250	6.350	90442S	2.250	57.150	4.83	0.85	1.89	8.41	0.644	16.350	5.00	22.240	0.038	0.94	316 SS	P	MH
0.250	6.350	90443S	2.500	63.500	4.25	0.74	1.89	8.41	0.732	18.594	5.00	22.240	0.038	0.94	316 SS	P	MH
0.250	6.350	90444S	2.750	69.850	3.83	0.67	1.89	8.41	0.812	20.615	5.00	22.240	0.038	0.94	316 SS	P	MH
0.250	6.350	90445S	3.000	76.200	3.42	0.6	1.89	8.41	0.911	23.129	5.00	22.240	0.038	0.94	316 SS	P	MH
0.250	6.350	90446S	3.250	82.550	3.12	0.55	1.89	8.41	0.996	25.288	5.00	22.240	0.038	0.94	316 SS	P	MH
0.250	6.350	90447S	3.500	88.900	2.85	0.5	1.89	8.41	1.092	27.728	5.00	22.240	0.038	0.94	316 SS	P	MH
0.250	6.350	90448S	4.000	101.600	2.48	0.43	1.89	8.41	1.253	31.822	5.00	22.240	0.038	0.94	316 SS	P	MH
0.250	6.350	90449S	4.500	114.300	2.18	0.38	1.89	8.41	1.425	36.195	5.00	22.240	0.038	0.94	316 SS	P	MH
0.250	6.350	90450S	5.000	127.000	1.94	0.34	1.89	8.41	1.602	40.700	5.00	22.240	0.038	0.94	316 SS	P	MH
0.250	6.350	90451S	0.750	19.050	42.98	7.53	0.87	3.89	0.075	1.903	4.10	18.215	0.041	1.04	316 SS	P	MH
0.250	6.350	90452S	1.000	25.400	24.99	4.38	0.87	3.89	0.129	3.273	4.10	18.215	0.041	1.04	316 SS	P	MH
0.250	6.350	90453S	1.125	28.580	20.83	3.65	0.87	3.89	0.155	3.928	4.10	18.215	0.041	1.04	316 SS	P	MH
0.250	6.350	90454S	1.250	31.750	17.91	3.14	0.87	3.89	0.180	4.567	4.10	18.215	0.041	1.04	316 SS	P	MH
0.250	6.350	90455S	1.375	34.930	15.83	2.77	0.87	3.89	0.203	5.168	4.10	18.215	0.041	1.04	316 SS	P	MH
0.250	6.350	90456S	1.500	38.100	13.99	2.45	0.87	3.89	0.230	5.845	4.10	18.215	0.041	1.04	316 SS	P	MH
0.250	6.350	90457S	1.750	44.450	11.5	2.01	0.87	3.89	0.280	7.116	4.10	18.215	0.041	1.04	316 SS	P	MH
0.250	6.350	90458S	2.000	50.800	9.75	1.71	0.87	3.89	0.330	8.393	4.10	18.215	0.041	1.04	316 SS	P	MH
0.250	6.350	90459S	2.250	57.150	8.41	1.47	0.87	3.89	0.383	9.722	4.10	18.215	0.041	1.04	316 SS	P	MH
0.250	6.350	90460S	2.500	63.500	7.41	1.3	0.87	3.89	0.434	11.033	4.10	18.215	0.041	1.04	316 SS	P	MH
0.250	6.350	90461S	2.750	69.850	6.66	1.17	0.87	3.89	0.483	12.274	4.10	18.215	0.041	1.04	316 SS	P	MH
0.250	6.350	90462S	3.000	76.200	6.04	1.06	0.87	3.89	0.533	13.544	4.10	18.215	0.041	1.04	316 SS	P	MH
0.250	6.350	90463S	3.500	88.900	5.08	0.89	0.87	3.89	0.634	16.098	4.10	18.215	0.041	1.04	316 SS	P	MH
0.250	6.350	90464S	4.000	101.600	4.37	0.77	0.87	3.89	0.736	18.704	4.10	18.215	0.041	1.04	316 SS	P	MH
0.250	6.350	90465S	4.500	114.300	3.85	0.67	0.87	3.89	0.837	21.254	4.10	18.215	0.041	1.04	316 SS	P	MH
0.250	6.350	90466S	5.000	127.000	3.43	0.6	0.87	3.89	0.938	23.834	4.10	18.215	0.041	1.04	316 SS	P	MH

Long Length Extension Springs

The primary purpose of our 20-inch long stainless and 36-inch long hard-drawn carbon steel spring bodies, found in the following tables, is to offer a means for our customers to create a desired custom length and/or spring extension travel for a given load. Once cut, the end coils may be bent into hooks or loops as depicted below. These springs are offered in unfinished spring wire.

As wire size increases, it is necessary to use different tools including a vise to hold the coil body and a pry bar to bend up the last coil. The technique, however, is the same.

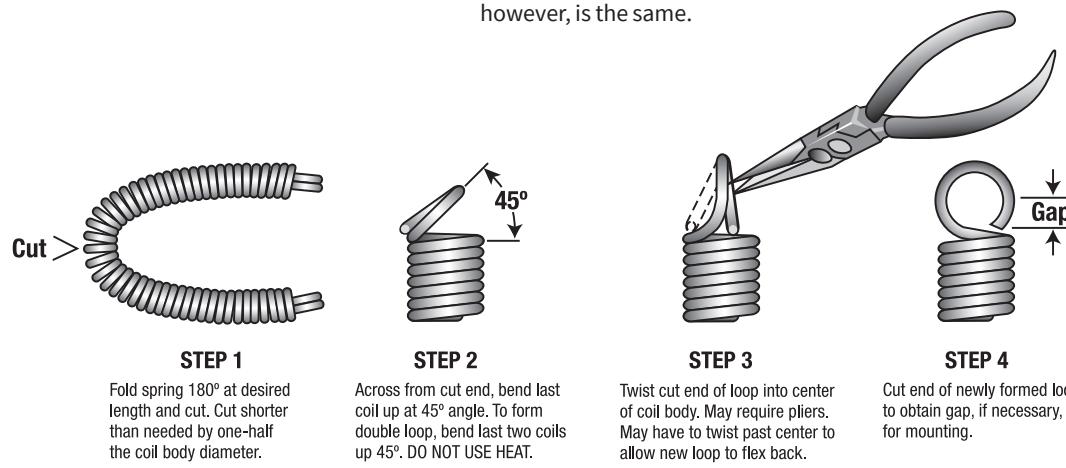

Selecting a Long Length Extension Spring

The spring rate (lbs/in) can be determined for any cut length by simply dividing the listed spring rate constant (lbs) by the length we want to cut it to. For example for SS2-13, if we want to cut it to 8", rate=.32 lbs/8" = .04 lbs/in

Each spring has an initial tension force (pounds) that must be overcome before stretching commences. The initial tension is the minimum force required to separate adjacent coils.

Long Length Extension Springs STAINLESS STEEL (302) 20 INCH LENGTHS

Century Stock Number	O.D. Inches	O.D. mm	Wire Diameter Inches	Wire Diameter mm	Approx. Init. Tension Lbs.	Approx. Init. Tension N	Rate Constant Lbs.	Rate Constant N	Sugg Max. Load Lbs.	Sugg Max. Load N
SS2-13	0.125	3.175	0.013	0.330	0.1	0.44	.32	1.4	0.718	3.19
SS2-15	0.125	3.175	0.015	0.381	0.2	0.89	.72	3.2	1.08	4.80
SS2-17	0.125	3.175	0.017	0.432	0.3	1.33	1.4	6.2	1.54	6.85
SS2-20	0.125	3.175	0.02	0.508	0.5	2.22	3.5	15.6	2.427	10.80
SS3-15	0.187	4.750	0.015	0.381	0.1	0.44	.18	0.8	0.738	3.28
SS3-17	0.187	4.750	0.017	0.432	0.2	0.89	.36	1.6	1.057	4.70
SS3-20	0.187	4.750	0.02	0.508	0.3	1.33	.86	3.8	1.679	7.47
SS3-26	0.187	4.750	0.026	0.660	0.7	3.11	3.5	15.6	3.515	15.63
SS4-15	0.25	6.350	0.015	0.381	0.02	0.09	.07	0.3	0.557	2.48
SS4-17	0.25	6.350	0.017	0.432	0.1	0.44	.14	0.6	0.8	3.56
SS4-20	0.25	6.350	0.02	0.508	0.2	0.89	.32	1.4	1.274	5.67
SS4-26	0.25	6.350	0.026	0.660	0.4	1.78	1.2	5.3	2.686	11.95
SS4-32	0.25	6.350	0.032	0.813	1	4.45	4.1	18.2	5.556	24.71
SS5-20	0.312	7.925	0.02	0.508	0.05	0.22	.16	0.7	1.029	4.58
SS5-26	0.312	7.925	0.026	0.660	0.3	1.33	.62	2.8	2.176	9.68
SS5-32	0.312	7.925	0.032	0.813	0.6	2.67	1.9	8.5	3.912	17.40
SS5-41	0.312	7.925	0.041	1.041	2	8.90	7.2	32.0	7.805	34.72
SS6-32	0.375	9.525	0.032	0.813	0.4	1.78	1.0	4.4	3.285	14.61
SS6-41	0.375	9.525	0.041	1.041	1	4.45	3.9	17.3	6.581	29.27
SS6-54	0.375	9.525	0.054	1.372	4	17.79	17	75.6	14.059	62.53
SS7-41	0.438	11.125	0.041	1.041	1	4.45	2.3	10.2	5.684	25.28
SS7-54	0.438	11.125	0.054	1.372	3	13.34	10	44.5	12.198	54.26
SS8-54	0.5	12.700	0.054	1.372	2	8.90	6.5	28.9	10.783	47.96
SS8-72	0.5	12.700	0.072	1.829	6	26.69	29	129.0	23.651	105.20
SS9-54	0.562	14.275	0.054	1.372	1.5	6.67	4.4	19.6	9.657	42.95
SS9-72	0.562	14.275	0.072	1.829	5	22.24	19	84.5	21.261	94.57
SS9-91	0.562	14.275	0.091	2.311	12	53.38	68	302.5	39.851	177.26
SS10-72	0.625	15.875	0.072	1.829	4	17.79	14	62.3	19.269	85.71
SS10-91	0.625	15.875	0.091	2.311	10	44.48	51	226.8	19.269	85.71
SS12-91	0.75	19.050	0.091	2.311	8	35.58	27	120.1	30.688	136.50

Long Length Extension Springs CARBON STEEL (ASTM A227) 36 INCH LENGTHS

Century Stock Number	O.D. Inches	O.D. mm	Wire Diameter Inches	Wire Diameter mm	Approx. Init. Tension Lbs.	Approx. Init. Tension N	Rate Constant Lbs.	Rate Constant N	Sugg Max. Load Lbs.	Sugg Max. Load N
E-1	0.125	3.175	0.012	0.305	0.1	0.44	.25	1.1	0.639	2.84
E-2	0.125	3.175	0.014	0.356	0.1	0.44	.57	2.5	0.983	4.37
E-3	0.125	3.175	0.016	0.406	0.2	0.89	1.2	5.3	1.426	6.34
E-3-A	0.125	3.175	0.018	0.457	0.5	2.22	2.2	9.8	1.975	8.78
E-4	0.125	3.175	0.023	0.584	0.9	4.00	8.7	38.7	3.853	17.14
E-5	0.187	4.750	0.016	0.406	0.1	0.44	.32	1.4	0.977	4.35
E-6	0.187	4.750	0.018	0.457	0.2	0.89	.58	2.6	1.359	6.04
E-7	0.187	4.750	0.023	0.584	0.4	1.78	2.1	9.3	2.691	11.97
E-8	0.187	4.750	0.028	0.711	1	4.45	6.2	27.6	4.628	20.59
E-9	0.25	6.350	0.018	0.457	0.2	0.89	.22	1.0	1.029	4.58
E-10	0.25	6.350	0.023	0.584	0.4	1.78	.80	3.6	2.049	9.11
E-11	0.25	6.350	0.028	0.711	1	4.45	2.3	10.2	3.546	15.77
E-12	0.25	6.350	0.035	0.889	2	8.90	7.6	33.8	6.57	29.22
E-13	0.312	7.925	0.023	0.584	0.2	0.89	.38	1.7	1.657	7.37
E-14	0.312	7.925	0.028	0.711	0.5	2.22	1.1	4.9	2.877	12.80
E-15	0.312	7.925	0.035	0.889	2	8.90	3.6	16.0	5.357	23.83
E-16	0.312	7.925	0.047	1.194	2	8.90	18	80.1	12.06	53.64
E-17	0.375	9.525	0.028	0.711	0.5	2.22	.59	2.6	2.11	9.39
E-18	0.375	9.525	0.035	0.889	1	4.45	1.9	8.5	4.504	20.03
E-19	0.375	9.525	0.047	1.194	2	8.90	9.3	41.4	10.203	45.38
E-20	0.375	9.525	0.063	1.600	6	26.69	47	209.1	22.7	100.97
E-21	0.438	11.125	0.035	0.889	1	4.45	1.1	4.9	3.883	17.27
E-22	0.438	11.125	0.047	1.194	1.5	6.67	5.9	26.2	9.092	40.44
E-23	0.438	11.125	0.063	1.600	4.5	20.02	27	120.1	19.777	87.97
E-24	0.5	12.700	0.047	1.194	1	4.45	3.5	15.6	8.024	35.69
E-25	0.5	12.700	0.054	1.372	2	8.90	7.5	33.4	11.455	50.95
E-26	0.5	12.700	0.063	1.600	3	13.34	17	75.6	17.147	76.27
E-27	0.5	12.700	0.072	1.829	8	35.58	35	155.7	25.261	112.36
E-28	0.5	12.700	0.08	2.032	10	44.48	64	284.7	33.627	149.57
E-29	0.562	14.275	0.047	1.194	1	4.45	2.4	10.7	6.97	31.00
E-30	0.562	14.275	0.063	1.600	3	13.34	11	48.9	15.724	69.94
E-31	0.562	14.275	0.08	2.032	7	31.14	42	186.8	30.292	134.74
E-32	0.625	15.875	0.047	1.194	1	4.45	1.7	7.6	6.294	28.00
E-33	0.625	15.875	0.063	1.600	2	8.90	8.0	35.6	13.919	61.91
E-34	0.625	15.875	0.08	2.032	5	22.24	29	129.0	40.262	179.09
E-34-A	0.625	15.875	0.092	2.337	10	44.48	62	275.8	39.67	176.45
E-35	0.75	19.050	0.047	1.194	0.5	2.22	.94	4.2	5.277	23.47
E-35-A	0.75	19.050	0.054	1.372	1	4.45	1.9	8.5	7.783	34.62
E-36	0.75	19.050	0.063	1.600	1.5	6.67	4.4	19.6	11.965	53.22
E-37	0.75	19.050	0.08	2.032	0.04	0.18	15	66.7	2.205	9.81
E-38	0.75	19.050	0.105	2.667	10	44.48	68	302.5	48.92	217.60
E-38-A	0.75	19.050	0.12	3.048	18	80.06	144	640.5	70.233	312.40
E-39	0.875	22.225	0.08	2.032	3	13.34	9.4	41.8	20.057	89.21
E-40	0.875	22.225	0.105	2.667	12	53.38	14	62.3	42.467	188.89
E-41	0.875	22.225	0.135	3.429	22	97.86	159	707.2	84.164	374.36
E-42	1	25.400	0.092	2.337	3	13.34	13	57.8	26.019	115.73
E-43	1	25.400	0.12	3.048	12	53.38	53	235.7	54.1	240.64
E-44	1.125	28.575	0.105	2.667	5	22.24	17	75.6	33.978	151.13
E-45	1.125	28.575	0.135	3.429	17	75.62	66	293.6	66.954	297.81
E-46	1.25	31.750	0.12	3.048	7	31.14	25	111.2	44.878	199.62
E-47	1.25	31.750	0.148	3.759	18	80.06	77	342.5	78.077	347.29
E-48	1.5	38.100	0.162	4.115	19	84.51	67	298.0	105.539	469.44

Available for Immediate Shipment

Spring Anchors


CSC spring anchors can be the quickest, and most efficient and economical way to secure the ends of an extension spring.

Low cost, adjustable, rugged and easy to use, put your extension spring to work

the easy way. Fine tune your loads with minimum trouble.

Spring anchors are made of C 1022 steel with a black oxide finish and 302 stainless, no finish.

Produced Exclusively By Century Spring Corp.

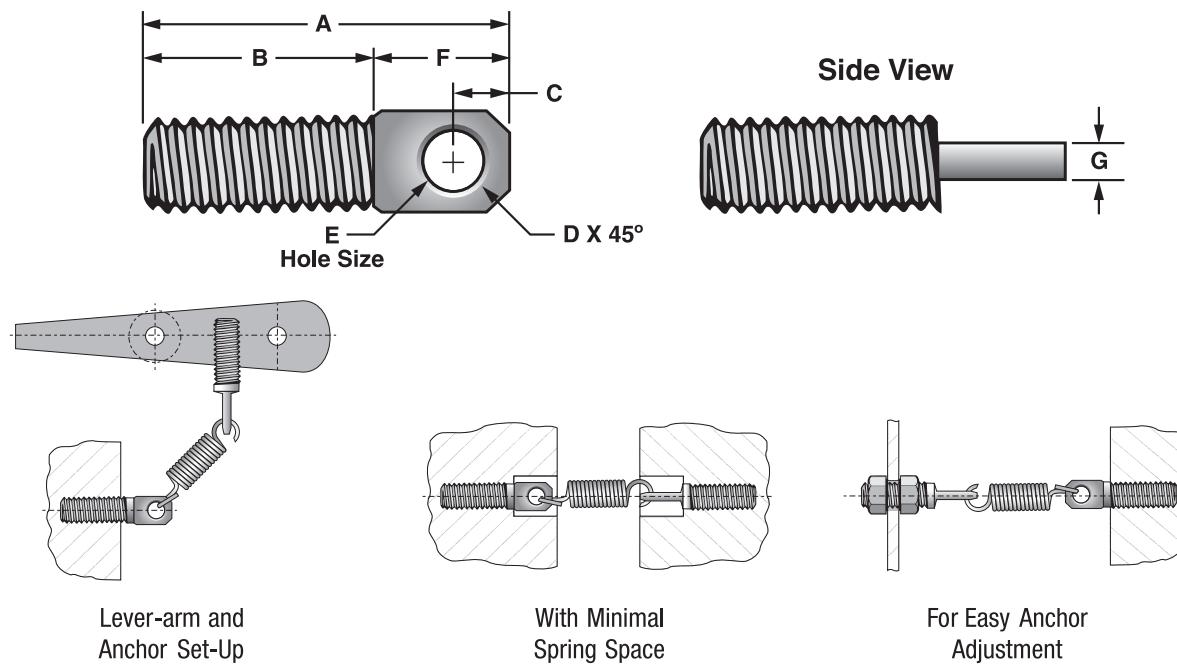

Spring Anchors STEEL

Century Stock Number	Thread Class 2A	A +/- .015"	B +/- .030"	C +/- .010"	D +/- .010"	E +/- .005"	F +/- .010"	G +/- .010"
CSA-50	6-32	0.625	0.465	0.072	0.075	0.05	0.15	0.06
CSA-60	8-32	0.875	0.7	0.08	0.095	0.07	0.16	0.07
CSA-70	0.25-20	1.25	0.99	0.13	0.12	0.1	0.26	0.12
CSA-80	0.25-28	1.25	0.99	0.13	0.15	0.1	0.26	0.12
CSA-90	0.375-16	1.625	1.27	0.19	0.21	0.17	0.36	0.15
CSA-100	0.375-24	1.625	1.27	0.19	0.21	0.17	0.36	0.15

Spring Anchors STAINLESS

Century Stock Number	Thread Class 2A	A +/- .015"	B +/- .030"	C +/- .010"	D +/- .010"	E +/- .005"	F +/- .010"	G +/- .010"
SSA-50	6-32	0.625	0.465	0.072	0.075	0.05	0.15	0.06
SSA-60	8-32	0.875	0.7	0.08	0.095	0.07	0.16	0.07
SSA-70	0.25-20	1.25	0.99	0.13	0.12	0.1	0.26	0.12
SSA-80	0.25-28	1.25	0.99	0.13	0.15	0.1	0.26	0.12
SSA-90	0.375-16	1.625	1.27	0.19	0.21	0.17	0.36	0.15
SSA-100	0.375-24	1.625	1.27	0.19	0.21	0.17	0.36	0.15

Available for immediate shipment



Torsion Springs



Century Spring offers a selection of torsion springs with legs of equal length oriented at varying unloaded angles. The torsion spring configuration is created for the purpose of storing and releasing angular energy or for the purpose of statically holding a mechanism in place by deflecting the legs about the body centerline axis. A spring of this type will reduce in body diameter and increase slightly

in body length when deflected in the preferred direction of the fabricated wind.

The direction of the fabricated wind can be important for torsion spring applications due to the leg bearing/attachment locations having to be on the left or right side upon assembly.


A torsion spring is normally supported by a rod (mandrel) that is coincident with the theoretical hingeline of the final product.

Selecting a Torsion Spring

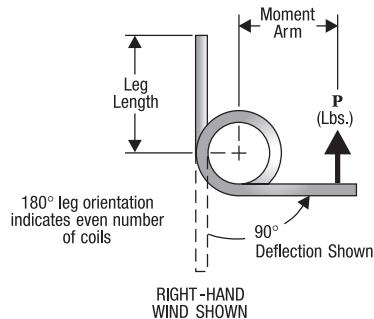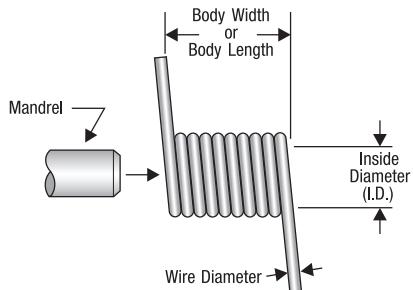

Determine the torque the spring will be expected to develop. The torque (or moment) is simply the applied force (pounds) pushing perpendicularly on a leg or leg extension times its distance (inches) to the centerline of the spring body. A typical example is depicted below:

$$\text{TORQUE} = \text{LOAD} \times L$$

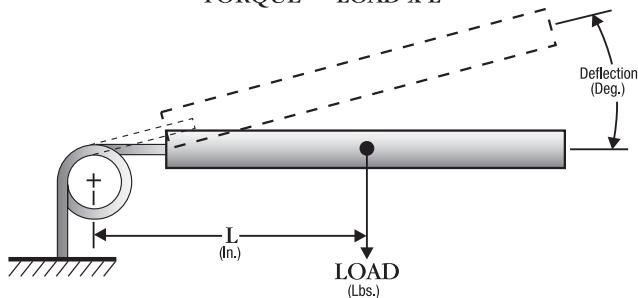

Determine the angular deflection (degrees of motion) through which the spring leg is required to rotate. Divide the torque by this angle to obtain the spring constant (rate) you require:

$$\text{Rate} = \frac{\text{Torque}}{\text{Degrees}} \left(\frac{\text{In. - Lbs.}}{\text{Deg.}} \right)$$




Or, if the torque required to rotate the spring through a given angle is required:

$$\text{Torque} = \text{Rate} \times \text{Degrees}$$


Scan down the inventory's "Rate" column for a spring with an acceptable rate. When found, observe the spring's "Inside diameter" (I.D.) and "Body Width" (length) columns for size compatibility with your application.

The "Suggested Maximum Deflection" column reflects limits (degrees) that should produce a long service life with average cycling. These values can be increased by as much as 20% for static (non-oscillatory) applications. Near-infinite service life can be possible using values of about 35% of those listed.

The initial unloaded relative-leg-angle orientation is determined by the number of coils in the spring body:

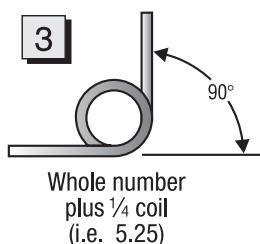

If it takes the right hand and index finger to simulate the spring's end view then it would be a right-hand wound spring. See the following depiction:

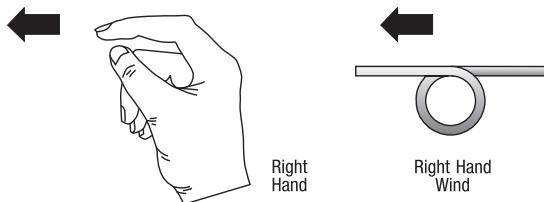

The body (solid) lengthening due to deflection increases approximately by one wire diameter for each complete leg revolution (360 degrees).

Design Information

The spring rate and stress for helical, round-wire torsion springs can be calculated from:

$$R = \frac{PL}{\theta} = \frac{Ed^4}{3888DN} \quad S = \frac{32PLK}{\pi d^3}$$

Where: **P** = Load, lbs.

L = Moment arm, inches

θ = Angle of deflection, degrees

E = 30×10^6 , (28 $\times 10^6$ /stainless) Young's Modulus

d = Wire diameter, inches

D = Body mean diameter (O.D. - d), inches

O.D. = Outside diameter, inches

N = Number of coils

K = Stress correction factor (see plot at right)

R = Rate (constant), in.-lbs./deg.

S = Stress (in bending), p.s.i.

Bending deflections of long legs under load must be considered for some applications and added to the total angular deflection.

Spring Characteristics

Materials

The highest grades of spring wire are used in fabricating our springs. To create cost-effective warehousing of our stock spring inventory for our customers, we offer material certifications for custom springs only. For stock springs, we offer an optional material verification statement for a \$25 fee. Certifications of conformance for geometric tolerances set by the Spring Manufacturers Institute (SMI) are available for our stock springs on request. See the Custom Spring section on [page 10](#) if material trace certifications or unique materials are required.

"Spring Steel" is a broad term for

Music wire

Hard-drawn Wire

Oil-tempered Wire

Stock torsion springs are offered in Stainless Steel 302.

The body inside diameter (I.D.) decreases according to:


$$\text{I.D.} = \frac{N}{N + \text{REVs}} \times \text{I.D. (unloaded)}$$

Where: **N** = Number of coils

REVs = Number of leg revolutions

Once the inside diameter of the load-contracted spring body is determined, the supporting mandrel's maximum diameter is usually set to about 90% of this value.

If the needed spring for your application cannot be found in our inventory, we can fabricate it for you. Call our Custom Spring department for a quote.

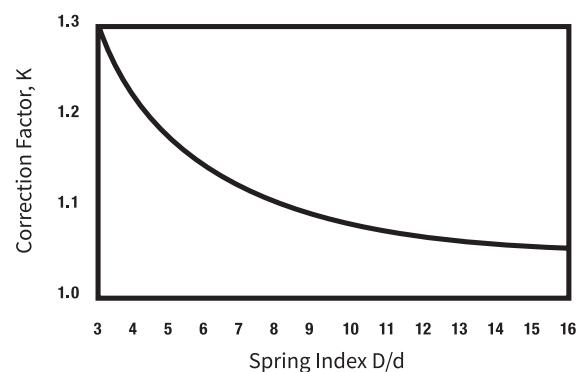

The uncorrected stress can be used for static applications.

The suggested maximum-allowable-stress value (S) for a torsion spring is considered to be 75% of the material's minimum tensile strength (MTS). MTS values are a function of the wire diameter and can be found on [page 539](#) of this catalog.

Tolerances

Tolerance values for torsion springs depend on the body-diameter to wire-diameter ratio and are about +/- 10% in torque and +/- 5% in diameter.

Finish

The finishes available for torsion springs are as indicated in the "Finish" column of the following inventory listings.


Finishes include

Zinc

Gold Iridite®

Passivated (upon request)


None (can be plated upon request)



Century Spring


Torsion Springs

Century Stock Number	I.D.		O.D.		Leg Length Inches mm	Body Length Inches mm	Rate		Sugg. Max. Defl. Deg	Sugg. Max. Load In-Lbs. N-mm	No. of Coils	Wind Dir.	Wire Dia.		Sugg. Mandrel Dia.		Mat'l	F n s h	
	Inches	mm	Inches	mm			In-lbs. Deg	N-mm Deg					Inches	mm	Inches	mm			
TO-1074	0.078	1.98	0.102	2.59	0.39	9.91	0.12	3.05	0.0002	0.02	153	0.032	3.62	8.375	Right	0.012	0.30	0.06	1.52 SPR N
TO-5000R	0.079	2.01	0.103	2.62	0.38	9.65	0.14	3.56	0.0002	0.02	225	0.042	4.75	9.75	Right	0.012	0.30	0.06	1.52 MW N
TO-5000L	0.079	2.01	0.103	2.62	0.37	9.40	0.14	3.56	0.0002	0.02	263	0.047	5.31	9.75	Left	0.012	0.30	0.06	1.52 MW N
TO-5000LS	0.079	2.01	0.103	2.62	0.38	9.65	0.14	3.56	0.0002	0.02	215	0.037	4.18	9.75	Left	0.012	0.30	0.06	1.52 SST N
TO-5000RS	0.079	2.01	0.103	2.62	0.38	9.65	0.14	3.56	0.0002	0.02	215	0.037	4.18	9.75	Right	0.012	0.30	0.06	1.52 SST N
TO-5001L	0.081	2.06	0.105	2.67	0.38	9.65	0.06	1.52	0.0006	0.07	79	0.044	4.97	3.25	Left	0.012	0.30	0.06	1.52 MW N
TO-5001LS	0.081	2.06	0.105	2.67	0.38	9.65	0.06	1.52	0.0005	0.06	72	0.037	4.18	3.25	Left	0.012	0.30	0.06	1.52 SST N
TO-5001R	0.081	2.06	0.105	2.67	0.38	9.65	0.06	1.52	0.0006	0.07	79	0.044	4.97	3.25	Right	0.012	0.30	0.06	1.52 MW N
TO-5001RS	0.081	2.06	0.105	2.67	0.38	9.65	0.06	1.52	0.0005	0.06	72	0.037	4.18	3.25	Right	0.012	0.30	0.06	1.52 SST N
TO-5003L	0.081	2.06	0.111	2.82	0.5	12.70	0.07	1.78	0.0011	0.12	70	0.078	8.81	3.25	Left	0.015	0.38	0.06	1.52 MW N
TO-5003LS	0.081	2.06	0.111	2.82	0.5	12.70	0.07	1.78	0.001	0.11	64	0.067	7.57	3.25	Left	0.015	0.38	0.07	1.78 SST N
TO-5003R	0.081	2.06	0.111	2.82	0.5	12.70	0.07	1.78	0.0011	0.12	70	0.078	8.81	3.25	Right	0.015	0.38	0.07	1.78 SST N
TO-1094	0.085	2.16	0.109	2.77	0.38	9.65	0.09	2.29	0.0003	0.03	143	0.037	4.18	6	Left	0.012	0.30	0.07	1.78 SST N
TO-5002L	0.086	2.18	0.11	2.79	0.38	9.65	0.09	2.29	0.0003	0.03	158	0.044	4.97	6	Left	0.012	0.30	0.07	1.78 MW N
TO-5002LS	0.086	2.18	0.11	2.79	0.38	9.65	0.09	2.29	0.0003	0.03	143	0.037	4.18	6	Left	0.012	0.30	0.07	1.78 SST N
TO-5002R	0.086	2.18	0.11	2.79	0.38	9.65	0.09	2.29	0.0003	0.03	158	0.044	4.97	6	Right	0.012	0.30	0.07	1.78 MW N
TO-5002RS	0.086	2.18	0.11	2.79	0.38	9.65	0.09	2.29	0.0003	0.03	143	0.037	4.18	6	Right	0.012	0.30	0.07	1.78 SST N
TO-1004	0.093	2.36	0.143	3.63	0.39	9.91	1.16	29.46	0.0006	0.07	508	0.32	36.15	41	Left	0.025	0.64	0.08	2.03 MW N
TO-1023	0.093	2.36	0.143	3.63	0.37	9.40	1.16	29.46	0.0006	0.07	508	0.32	36.15	41.125	Left	0.025	0.64	0.08	2.03 MW N
TO-1066	0.093	2.36	0.147	3.73	0.84	21.34	0.79	20.07	0.0013	0.15	239	0.32	36.15	25.5	Left	0.027	0.69	0.08	2.03 SPR N
TO-1056	0.093	2.36	0.215	5.46	0.93	23.62	1.48	37.59	0.0033	3.73	85	2.8	316.34	21	Left	0.061	1.55	0.08	2.03 SPR N
TO-5006L	0.095	2.41	0.125	3.18	0.5	12.70	0.18	4.57	0.0004	0.05	215	0.079	8.93	9.75	Left	0.015	0.38	0.08	2.03 MW N
TO-5006LS	0.095	2.41	0.125	3.18	0.5	12.70	0.18	4.57	0.0004	0.05	199	0.069	7.80	9.75	Left	0.015	0.38	0.08	2.03 SST N
TO-5006R	0.095	2.41	0.125	3.18	0.5	12.70	0.18	4.57	0.0004	0.05	215	0.079	8.93	9.75	Right	0.015	0.38	0.08	2.03 MW N
TO-5006RS	0.095	2.41	0.125	3.18	0.5	12.70	0.18	4.57	0.0004	0.05	199	0.069	7.80	9.75	Right	0.015	0.38	0.08	2.03 SST N
TO-5004L	0.096	2.44	0.124	3.15	0.5	12.70	0.07	1.78	0.0008	0.09	86	0.072	8.13	3.25	Left	0.014	0.36	0.08	2.03 MW N
TO-5004LS	0.096	2.44	0.124	3.15	0.5	12.70	0.07	1.78	0.0008	0.09	73	0.057	6.44	3.25	Left	0.014	0.36	0.08	2.03 SST N
TO-5004R	0.096	2.44	0.124	3.15	0.5	12.70	0.07	1.78	0.0008	0.09	86	0.072	8.13	3.25	Right	0.014	0.36	0.08	2.03 MW N
TO-5004RS	0.096	2.44	0.124	3.15	0.5	12.70	0.07	1.78	0.0008	0.09	73	0.057	6.44	3.25	Right	0.014	0.36	0.08	2.03 SST N
TO-5005L	0.096	2.44	0.124	3.15	0.5	12.70	0.17	4.32	0.0003	0.03	250	0.07	7.91	9.75	Left	0.014	0.36	0.08	2.03 MW N
TO-5005LS	0.096	2.44	0.124	3.15	0.5	12.70	0.17	4.32	0.0003	0.03	228	0.059	6.67	9.75	Left	0.014	0.36	0.08	2.03 SST N
TO-5005R	0.096	2.44	0.124	3.15	0.5	12.70	0.17	4.32	0.0003	0.03	250	0.07	7.91	9.75	Right	0.014	0.36	0.08	2.03 MW N
TO-5005RS	0.096	2.44	0.124	3.15	0.5	12.70	0.17	4.32	0.0003	0.03	228	0.059	6.67	9.75	Right	0.014	0.36	0.08	2.03 SST N
TO-1095	0.1	2.54	0.13	3.30	0.5	12.70	0.13	3.30	0.0005	0.06	149	0.068	7.68	7	Left	0.015	0.38	0.08	2.03 SST N
TO-5007R	0.101	2.57	0.131	3.33	0.5	12.70	0.12	3.05	0.0005	0.06	133	0.069	7.80	6	Right	0.015	0.38	0.08	2.03 SST N
TO-5007L	0.101	2.57	0.131	3.33	0.5	12.70	0.12	3.05	0.0006	0.07	140	0.078	8.81	6	Left	0.015	0.38	0.08	2.03 MW N
TO-5007LS	0.101	2.57	0.131	3.33	0.5	12.70	0.12	3.05	0.0005	0.06	133	0.069	7.80	6	Left	0.015	0.38	0.08	2.03 SST N
TO-5007R	0.101	2.57	0.131	3.33	0.5	12.70	0.12	3.05	0.0006	0.07	140	0.078	8.81	6	Right	0.015	0.38	0.08	2.03 MW N
TO-1080	0.105	2.67	0.133	3.38	0.5	12.70	0.12	3.05	0.0003	0.03	171	0.057	6.44	7	Right	0.014	0.36	0.08	2.03 SST N
TO-5008L	0.105	2.67	0.133	3.38	0.5	12.70	0.11	2.79	0.0004	0.05	167	0.07	7.91	6	Left	0.014	0.36	0.08	2.03 MW N
TO-5008LS	0.105	2.67	0.133	3.38	0.5	12.70	0.11	2.79	0.0004	0.05	146	0.057	6.44	6	Left	0.014	0.36	0.08	2.03 SST N
TO-5008R	0.105	2.67	0.133	3.38	0.5	12.70	0.11	2.79	0.0004	0.05	167	0.07	7.91	6	Right	0.014	0.36	0.08	2.03 MW N
TO-5008RS	0.105	2.67	0.133	3.38	0.5	12.70	0.11	2.79	0.0004	0.05	146	0.057	6.44	6	Right	0.014	0.36	0.08	2.03 SST N
TO-1038	0.105	2.67	0.145	3.68	0.3	7.62	0.39	9.91	0.0006	0.07	315	0.18	20.34	16.875	Right	0.02	0.51	0.08	2.03 MW Z
TO-1063	0.109	2.77	0.147	3.73	1.1	27.94	0.15	3.81	0.0013	0.15	98	0.13	14.69	6	Left	0.019	0.48	0.09	2.29 SPR N
TO-1052	0.109	2.77	0.179	4.55	0.58	14.73	0.62	15.75	0.0005	0.57	143	0.71	80.22	15.125	Right	0.035	0.89	0.09	2.29 SST N
TO-1130	0.11	2.79	0.138	3.51	0.5	12.70	0.13	3.30	0.0003	0.03	205	0.059	6.67	7.625	Right	0.014	0.36	0.09	2.29 SST N
TO-5011L	0.124	3.15	0.16	4.06	0.5	12.70	0.23	5.84	0.0006	0.07	241	0.13	14.69	10.75	Left	0.018	0.46	0.1	2.54 MW N
TO-5011LS	0.124	3.15	0.16	4.06	0.5	12.70	0.23	5.84	0.0005	0.06	229	0.12	13.56	10.75	Left	0.018	0.46	0.1	2.54 SST N
TO-5011R	0.124	3.15	0.16	4.06	0.5	12.70	0.23	5.84	0.0006	0.07	241	0.13	14.69	10.75	Right	0.018	0.46	0.1	2.54 MW N
TO-5011RS	0.124	3.15	0.16	4.06	0.5	12.70	0.23	5.84	0.0005	0.06	229	0.12	13.56	10.75	Right	0.018	0.46	0.1	2.54 SST N
TO-1076	0.125	3.18	0.157	3.99	0.31	7.87	0.14	3.56	0.0005	0.06	153	0.078	8.81	7	Right	0.016	0.41	0.1	2.54 SPR N
TO-1062	0.125	3.18	0.161	4.09	0.4	10.16	0.18	4.57	0.0007	0.08	157	0.11	12.43	8.125	Right	0.018	0.46	0.1	2.54 SPR N
TO-1048	0.125	3.18	0.219	5.56	0.35	8.89	0.88	22.35	0.0128	1.45	131	1.7	192.07	16	Left	0.047	1.19		

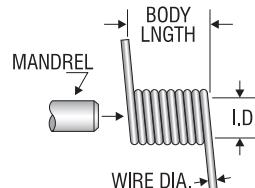

Torsion Springs


Century Stock Number	I.D.		O.D.		Leg Length		Body Length		Rate In-Lbs. Deg	Sugg. Max. Defl. N-mm Deg	Sugg. Max. Load In-Lbs. N-mm	No. of Coils	Wind Dir.	Wire Dia.		Sugg. Mandrel Dia.		Mat'l	F n s h		
	Inches	mm	Inches	mm	Inches	mm	Inches	mm						Wind Dir.	Wire Dia. Inches	Wire Dia. mm	Sugg. Mandrel Dia. Inches	Sugg. Mandrel Dia. mm			
TO-5015L	0.138	3.51	0.172	4.37	0.5	12.70	0.13	3.30	0.0007	0.08	169	0.12	13.56	6	Left	0.017	0.43	0.11	2.79	MW	N
TO-5015R	0.138	3.51	0.172	4.37	0.5	12.70	0.13	3.30	0.0007	0.08	169	0.12	13.56	6	Right	0.017	0.43	0.11	2.79	MW	N
TO-5015RS	0.138	3.51	0.172	4.37	0.5	12.70	0.13	3.30	0.0007	0.08	151	0.098	11.07	6	Right	0.017	0.43	0.11	2.79	SST	N
TO-5019L	0.139	3.53	0.179	4.55	0.75	19.05	0.18	4.57	0.0011	0.12	170	0.19	21.47	7	Left	0.02	0.51	0.11	2.79	MW	N
TO-5019LS	0.139	3.53	0.179	4.55	0.75	19.05	0.18	4.57	0.001	0.11	153	0.16	18.08	7	Left	0.02	0.51	0.11	2.79	SST	N
TO-5019R	0.139	3.53	0.179	4.55	0.75	19.05	0.18	4.57	0.0011	0.12	170	0.19	21.47	7	Right	0.02	0.51	0.11	2.79	MW	N
TO-5019RS	0.139	3.53	0.179	4.55	0.75	19.05	0.18	4.57	0.001	0.11	153	0.16	18.08	7	Right	0.02	0.51	0.11	2.79	SST	N
TO-1049	0.14	3.56	0.264	6.71	1	25.40	0.64	16.26	0.0674	7.62	48	3.2	361.54	8.375	Left	0.062	1.57	0.12	3.05	HD	Z
TO-1075	0.141	3.58	0.183	4.65	0.78	19.81	0.16	4.06	0.0015	0.17	113	0.18	20.34	6	Right	0.021	0.53	0.11	2.79	SPR	N
TO-5023L	0.141	3.58	0.187	4.75	0.75	19.05	0.3	7.62	0.0012	0.14	229	0.28	31.63	10.75	Left	0.023	0.58	0.11	2.79	MW	N
TO-5023LS	0.141	3.58	0.187	4.75	0.75	19.05	0.3	7.62	0.0011	0.12	210	0.24	27.12	10.75	Left	0.023	0.58	0.11	2.79	SST	N
TO-5023R	0.141	3.58	0.187	4.75	0.75	19.05	0.3	7.62	0.0012	0.14	229	0.28	31.63	10.75	Right	0.023	0.58	0.11	2.79	MW	N
TO-5023RS	0.141	3.58	0.187	4.75	0.75	19.05	0.3	7.62	0.0011	0.12	210	0.24	27.12	10.75	Right	0.023	0.58	0.11	2.79	SST	N
TO-5018L	0.142	3.61	0.178	4.52	0.5	12.70	0.08	2.03	0.0017	0.19	83	0.14	15.82	3.25	Left	0.018	0.46	0.11	2.79	MW	N
TO-5018LS	0.142	3.61	0.178	4.52	0.5	12.70	0.08	2.03	0.0016	0.18	76	0.12	13.56	3.25	Left	0.018	0.46	0.11	2.79	SST	N
TO-5018R	0.142	3.61	0.178	4.52	0.5	12.70	0.08	2.03	0.0017	0.19	83	0.14	15.82	3.25	Right	0.018	0.46	0.11	2.79	MW	N
TO-5018RS	0.142	3.61	0.178	4.52	0.5	12.70	0.08	2.03	0.0016	0.18	76	0.12	13.56	3.25	Right	0.018	0.46	0.11	2.79	SST	N
TO-5013L	0.143	3.63	0.167	4.24	0.5	12.70	0.07	1.78	0.0003	0.03	175	0.049	5.54	4	Left	0.012	0.30	0.11	2.79	MW	N
TO-5013LS	0.143	3.63	0.167	4.24	0.5	12.70	0.07	1.78	0.0003	0.03	143	0.037	4.18	4	Left	0.012	0.30	0.11	2.79	SST	N
TO-5013R	0.143	3.63	0.167	4.24	0.5	12.70	0.07	1.78	0.0003	0.03	175	0.049	5.54	4	Right	0.012	0.30	0.11	2.79	MW	N
TO-5013RS	0.143	3.63	0.167	4.24	0.5	12.70	0.07	1.78	0.0003	0.03	143	0.037	4.18	4	Right	0.012	0.30	0.11	2.79	SST	N
TO-5021L	0.143	3.63	0.185	4.70	0.75	19.05	0.27	6.86	0.0009	0.10	232	0.22	24.86	10.75	Left	0.021	0.53	0.11	2.79	MW	N
TO-5021LS	0.143	3.63	0.185	4.70	0.75	19.05	0.27	6.86	0.0008	0.09	218	0.18	20.34	10.75	Left	0.021	0.53	0.12	3.05	SST	N
TO-5021R	0.143	3.63	0.185	4.70	0.75	19.05	0.27	6.86	0.0009	0.10	232	0.22	24.86	10.75	Right	0.021	0.53	0.11	2.79	MW	N
TO-5021RS	0.143	3.63	0.185	4.70	0.75	19.05	0.27	6.86	0.0008	0.09	218	0.18	20.34	10.75	Right	0.021	0.53	0.12	3.05	SST	N
TO-5022L	0.144	3.66	0.186	4.72	0.75	19.05	0.18	4.57	0.0014	0.16	156	0.22	24.86	7	Left	0.021	0.53	0.12	3.05	MW	N
TO-5022LS	0.144	3.66	0.186	4.72	0.75	19.05	0.18	4.57	0.0013	0.15	149	0.19	21.47	7	Left	0.021	0.53	0.12	3.05	SST	N
TO-5022R	0.144	3.66	0.186	4.72	0.75	19.05	0.18	4.57	0.0014	0.16	156	0.22	24.86	7	Right	0.021	0.53	0.12	3.05	MW	N
TO-5022RS	0.144	3.66	0.186	4.72	0.75	19.05	0.18	4.57	0.0013	0.15	149	0.19	21.47	7	Right	0.021	0.53	0.12	3.05	SST	N
TO-5028LS	0.145	3.68	0.191	4.85	0.75	19.05	0.2	5.08	0.0017	0.19	141	0.24	27.12	7	Left	0.023	0.58	0.12	3.05	SST	N
TO-5028L	0.145	3.68	0.191	4.85	0.75	19.05	0.2	5.08	0.0018	0.20	155	0.28	31.63	7	Left	0.023	0.58	0.12	3.05	MW	N
TO-5028R	0.145	3.68	0.191	4.85	0.75	19.05	0.2	5.08	0.0018	0.20	155	0.28	31.63	7	Right	0.023	0.58	0.12	3.05	MW	N
TO-5028RS	0.145	3.68	0.191	4.85	0.75	19.05	0.2	5.08	0.0017	0.19	141	0.24	27.12	7	Right	0.023	0.58	0.12	3.05	SST	N
TO-5014L	0.147	3.73	0.171	4.34	0.5	12.70	0.09	2.29	0.0002	0.02	263	0.049	5.54	5.75	Left	0.012	0.30	0.11	2.79	MW	N
TO-5014LS	0.147	3.73	0.171	4.34	0.5	12.70	0.09	2.29	0.0002	0.02	215	0.037	4.18	5.75	Left	0.012	0.30	0.11	2.79	SST	N
TO-5014R	0.147	3.73	0.171	4.34	0.5	12.70	0.09	2.29	0.0002	0.02	263	0.049	5.54	5.75	Right	0.012	0.30	0.11	2.79	MW	N
TO-5014RS	0.147	3.73	0.171	4.34	0.5	12.70	0.09	2.29	0.0002	0.02	215	0.037	4.18	5.75	Right	0.012	0.30	0.11	2.79	SST	N
TO-1114	0.147	3.73	0.185	4.70	1.4	35.56	1.59	40.39	0.0001	0.01	1891	0.15	16.95	75	Right	0.019	0.48	0.12	3.05	MW	Z
TO-5016L	0.15	3.81	0.174	4.42	0.5	12.70	0.11	2.79	0.0001	0.01	315	0.044	4.97	7.5	Left	0.012	0.30	0.11	2.79	MW	N
TO-5016LS	0.15	3.81	0.174	4.42	0.5	12.70	0.11	2.79	0.0001	0.01	323	0.042	4.75	7.5	Left	0.012	0.30	0.11	2.79	SST	N
TO-5016R	0.15	3.81	0.174	4.42	0.5	12.70	0.11	2.79	0.0001	0.01	315	0.044	4.97	7.5	Right	0.012	0.30	0.11	2.79	MW	N
TO-5016RS	0.15	3.81	0.174	4.42	0.5	12.70	0.11	2.79	0.0001	0.01	323	0.042	4.75	7.5	Right	0.012	0.30	0.11	2.79	SST	N
TO-5027LS	0.151	3.84	0.191	4.85	0.75	19.05	0.09	2.29	0.0021	0.24	77	0.16	18.08	3.25	Left	0.02	0.51	0.12	3.05	SST	N
TO-5027L	0.151	3.84	0.191	4.85	0.75	19.05	0.09	2.29	0.0022	0.25	85	0.19	21.47	3.25	Left	0.02	0.51	0.12	3.05	MW	N
TO-5027R	0.151	3.84	0.191	4.85	0.75	19.05	0.09	2.29	0.0022	0.25	85	0.19	21.47	3.25	Right	0.02	0.51	0.12	3.05	MW	N
TO-5027RS	0.151	3.84	0.191	4.85	0.75	19.05	0.09	2.29	0.0021	0.24	77	0.16	18.08	3.25	Right	0.02	0.51	0.12	3.05	SST	N
TO-1096	0.153	3.89	0.183	4.65	0.75	19.05	0.1	2.54	0.0004	0.05	159	0.069	7.80	5	Left	0.015	0.38	0.12	3.05	SST	N
TO-5020L	0.154	3.91	0.184	4.67	0.75	19.05	0.08	2.03	0.0006	0.07	147	0.082	9.26	4	Left	0.015	0.38	0.12	3.05	MW	N
TO-5020LS	0.154	3.91	0.184	4.67	0.75	19.05	0.08	2.03	0.0005	0.06	133	0.069	7.80	4	Left	0.015	0.38	0.12	3.05	SST	N
TO-5020R	0.154	3.91	0.184	4.67	0.75	19.05	0.08	2.03	0.0006	0.07	147	0.082	9.26	4	Right	0.015	0.38	0.12	3.05	MW	N
TO-5020RS	0.154	3.91	0.184	4.67	0.75	19.05	0.08	2.03	0.0005	0.06	133	0.069	7.80	4	Right	0.015	0.38	0.12	3.05</		



Century Spring


Torsion Springs

Century Stock Number	I.D.		O.D.		Leg Length Inches mm	Body Length Inches mm	Rate		Sugg. Max. Defl. Deg	Sugg. Max. Load In-Lbs. N-mm	No. of Coils	Wind Dir.	Wire Dia.		Sugg. Mandrel Dia.		Mat'l	F n sh	
	Inches	mm	Inches	mm			In-lbs. Deg	N-mm Deg					Inches	mm	Inches	mm			
TO-5037L	0.17	4.32	0.22	5.59	0.75	19.05	0.32	8.13	0.0016	0.18	222	0.35	39.54	10.75	Left	0.025	0.64	0.14	3.56 MW N
TO-5037LS	0.17	4.32	0.22	5.59	0.75	19.05	0.32	8.13	0.0014	0.16	210	0.3	33.89	10.75	Left	0.025	0.64	0.14	3.56 SST N
TO-5037R	0.17	4.32	0.22	5.59	0.75	19.05	0.32	8.13	0.0016	0.18	222	0.35	39.54	10.75	Right	0.025	0.64	0.14	3.56 MW N
TO-5037RS	0.17	4.32	0.22	5.59	0.75	19.05	0.32	8.13	0.0014	0.16	210	0.3	33.89	10.75	Right	0.025	0.64	0.14	3.56 SST N
TO-1033	0.171	4.34	0.235	5.97	0.89	22.61	1.23	31.24	0.0012	0.14	608	0.71	80.22	34	Right	0.032	0.81	0.14	3.56 MW Z
TO-1010	0.171	4.34	0.269	6.83	0.74	18.80	1.29	32.77	0.0088	0.99	258	2.3	259.85	22.875	Right	0.049	1.24	0.14	3.56 MW N
TO-5032L	0.173	4.39	0.201	5.11	0.75	19.05	0.1	2.54	0.0003	0.03	278	0.077	8.70	5.75	Left	0.014	0.36	0.13	3.30 MW N
TO-5032LS	0.173	4.39	0.201	5.11	0.75	19.05	0.1	2.54	0.0003	0.03	228	0.059	6.67	5.75	Left	0.014	0.36	0.13	3.30 SST N
TO-5032R	0.173	4.39	0.201	5.11	0.75	19.05	0.1	2.54	0.0003	0.03	278	0.077	8.70	5.75	Right	0.014	0.36	0.13	3.30 MW N
TO-5032RS	0.173	4.39	0.201	5.11	0.75	19.05	0.1	2.54	0.0003	0.03	228	0.059	6.67	5.75	Right	0.014	0.36	0.13	3.30 SST N
TO-1083	0.174	4.42	0.224	5.69	0.75	19.05	0.25	6.35	0.0018	0.20	169	0.3	33.89	8	Right	0.025	0.64	0.14	3.56 SST N
TO-1099	0.174	4.42	0.224	5.69	0.75	19.05	0.25	6.35	0.0018	0.20	169	0.3	33.89	8	Left	0.025	0.64	0.14	3.56 SST N
TO-5038L	0.175	4.45	0.225	5.72	0.75	19.05	0.22	5.59	0.0023	0.26	149	0.35	39.54	7	Left	0.025	0.64	0.14	3.56 MW N
TO-5038LS	0.175	4.45	0.225	5.72	0.75	19.05	0.22	5.59	0.0021	0.24	140	0.3	33.89	7	Left	0.025	0.64	0.14	3.56 SST N
TO-5038R	0.175	4.45	0.225	5.72	0.75	19.05	0.22	5.59	0.0023	0.26	149	0.35	39.54	7	Right	0.025	0.64	0.14	3.56 MW N
TO-5038RS	0.175	4.45	0.225	5.72	0.75	19.05	0.22	5.59	0.0021	0.24	140	0.3	33.89	7	Right	0.025	0.64	0.14	3.56 SST N
TO-5033L	0.176	4.47	0.204	5.18	0.75	19.05	0.13	3.30	0.0002	0.02	357	0.074	8.36	7.5	Left	0.014	0.36	0.13	3.30 MW N
TO-5033LS	0.176	4.47	0.204	5.18	0.75	19.05	0.13	3.30	0.0002	0.02	293	0.057	6.44	7.5	Left	0.014	0.36	0.13	3.30 SST N
TO-5033R	0.176	4.47	0.204	5.18	0.75	19.05	0.13	3.30	0.0002	0.02	357	0.074	8.36	7.5	Right	0.014	0.36	0.13	3.30 MW N
TO-5033RS	0.176	4.47	0.204	5.18	0.75	19.05	0.13	3.30	0.0002	0.02	293	0.057	6.44	7.5	Right	0.014	0.36	0.13	3.30 SST N
TO-5035L	0.178	4.52	0.208	5.28	0.75	19.05	0.14	3.56	0.0003	0.03	310	0.086	9.72	7.5	Left	0.015	0.38	0.14	3.56 MW N
TO-5035LS	0.178	4.52	0.208	5.28	0.75	19.05	0.14	3.56	0.0003	0.03	265	0.069	7.80	7.5	Left	0.015	0.38	0.14	3.56 SST N
TO-5035R	0.178	4.52	0.208	5.28	0.75	19.05	0.14	3.56	0.0003	0.03	310	0.086	9.72	7.5	Right	0.015	0.38	0.14	3.56 MW N
TO-5035RS	0.178	4.52	0.208	5.28	0.75	19.05	0.14	3.56	0.0003	0.03	265	0.069	7.80	7.5	Right	0.015	0.38	0.14	3.56 SST N
TO-1097	0.18	4.57	0.216	5.49	0.75	19.05	0.14	3.56	0.0006	0.07	187	0.12	13.56	6	Left	0.018	0.46	0.14	3.56 SST N
TO-5036L	0.181	4.60	0.217	5.51	0.75	19.05	0.12	3.05	0.0008	0.09	166	0.14	15.82	5	Left	0.018	0.46	0.14	3.56 MW N
TO-5036LS	0.181	4.60	0.217	5.51	0.75	19.05	0.12	3.05	0.0008	0.09	153	0.12	13.56	5	Left	0.018	0.46	0.14	3.56 SST N
TO-5036R	0.181	4.60	0.217	5.51	0.75	19.05	0.12	3.05	0.0008	0.09	166	0.14	15.82	5	Right	0.018	0.46	0.14	3.56 MW N
TO-5036RS	0.181	4.60	0.217	5.51	0.75	19.05	0.12	3.05	0.0008	0.09	153	0.12	13.56	5	Right	0.018	0.46	0.14	3.56 SST N
TO-1082	0.185	4.70	0.235	5.97	0.75	19.05	0.13	3.30	0.0036	0.41	84	0.3	33.89	3.75	Right	0.025	0.64	0.15	3.81 SST N
TO-1098	0.185	4.70	0.235	5.97	0.75	19.05	0.13	3.30	0.0036	0.41	84	0.3	33.89	3.75	Left	0.025	0.64	0.15	3.81 SST N
TO-5041L	0.186	4.72	0.236	5.99	0.75	19.05	0.12	3.05	0.0047	0.53	74	0.35	39.54	3.25	Left	0.025	0.64	0.15	3.81 MW N
TO-5041LS	0.186	4.72	0.236	5.99	0.75	19.05	0.12	3.05	0.0043	0.49	70	0.3	33.89	3.25	Left	0.025	0.64	0.15	3.81 SST N
TO-5041R	0.186	4.72	0.236	5.99	0.75	19.05	0.12	3.05	0.0047	0.53	74	0.35	39.54	3.25	Right	0.025	0.64	0.15	3.81 MW N
TO-5041RS	0.186	4.72	0.236	5.99	0.75	19.05	0.12	3.05	0.0043	0.49	70	0.3	33.89	3.25	Right	0.025	0.64	0.15	3.81 SST N
TO-1024	0.187	4.75	0.271	6.88	0.87	22.10	0.24	6.10	0.0247	2.79	60	1.5	169.47	4.25	Left	0.042	1.07	0.15	3.81 MW N
TO-1045	0.187	4.75	0.311	7.90	0.41	10.41	1.13	28.70	0.0295	3.33	116	3.4	384.13	15.5	Right	0.062	1.57	0.16	4.06 HD Z
TO-5043L	0.189	4.80	0.245	6.22	1	25.40	0.36	9.14	0.002	0.23	238	0.48	54.23	10.75	Left	0.028	0.71	0.15	3.81 MW N
TO-5043LS	0.189	4.80	0.245	6.22	1	25.40	0.36	9.14	0.0019	0.21	220	0.42	47.45	10.75	Left	0.028	0.71	0.15	3.81 SST N
TO-5043R	0.189	4.80	0.245	6.22	1	25.40	0.36	9.14	0.002	0.23	238	0.48	54.23	10.75	Right	0.028	0.71	0.15	3.81 MW N
TO-5043RS	0.189	4.80	0.245	6.22	1	25.40	0.36	9.14	0.0019	0.21	220	0.42	47.45	10.75	Right	0.028	0.71	0.15	3.81 SST N
TO-5048L	0.193	4.90	0.249	6.32	1	25.40	0.25	6.35	0.0029	0.33	146	0.42	47.45	7	Left	0.028	0.71	0.16	4.06 SST N
TO-5048L	0.193	4.90	0.249	6.32	1	25.40	0.25	6.35	0.0031	0.35	159	0.48	54.23	7	Left	0.028	0.71	0.15	3.81 MW N
TO-5048R	0.193	4.90	0.249	6.32	1	25.40	0.25	6.35	0.0031	0.35	159	0.48	54.23	7	Right	0.028	0.71	0.15	3.81 MW N
TO-5048RS	0.193	4.90	0.249	6.32	1	25.40	0.25	6.35	0.0029	0.33	146	0.42	47.45	7	Right	0.028	0.71	0.16	4.06 SST N
TO-5039L	0.198	5.03	0.234	5.94	0.75	19.05	0.21	5.33	0.0004	0.05	345	0.14	15.82	9.5	Left	0.018	0.46	0.15	3.81 MW N
TO-5039LS	0.198	5.03	0.234	5.94	0.75	19.05	0.21	5.33	0.0004	0.05	317	0.12	13.56	9.5	Left	0.018	0.46	0.15	3.81 SST N
TO-5039R	0.198	5.03	0.234	5.94	0.75	19.05	0.21	5.33	0.0004	0.05	345	0.14	15.82	9.5	Right	0.018	0.46	0.15	3.81 MW N
TO-5039RS	0.198	5.03	0.234	5.94	0.75	19.05	0.21	5.33	0.0004	0.05	317	0.12	13.56	9.5	Right	0.018	0.46	0.15	3.81 SST N
TO-5053L	0.2	5.08	0.264	6.71	1	25.40	0.41	10.41	0.0032	0.36	220	0.71	80.22	10.75	Left	0.032	0.81	0.16	4.06 MW N
TO-5053LS	0.2	5.08	0.264	6.71	1	25.40	0.41	10.41	0.003	0.34	204	0.62	70.05	10.75	Left	0.032	0.81	0.16	4.06 SST N
TO-5053R	0.2	5.08	0.264	6.71	1	25.40	0.41	10.41	0.0032	0.36	220	0.71	80.22	10.75	Right	0.032	0.81	0.16	4.06 MW N
TO-5053RS	0.2	5.08	0.264	6.71	1	25.40	0.41	10.41	0.003	0.34	204	0.62	70.05	10.75	Right	0.032	0.81	0.16	4.06 SST N
TO-5040L	0.201	5.11	0.235	5.97	0.75	19.05	0.18	4.57	0.0004	0.05</									

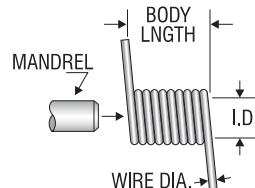

Torsion Springs


Century Stock Number	I.D. Inches mm	O.D. Inches mm	Leg Length Inches mm	Body Length Inches mm	Rate In-Lbs. Deg	Sugg. Max. Defl. Deg	Sugg. Max. Load In-Lbs. N-mm	No. of Coils	Wind Dir.	Wire Dia.		Sugg. Mandrel Dia. Inches mm	Mat'l	F n s h							
										Inches	mm										
TO-5046RS	0.206	5.23	0.248	6.30	1	25.40	0.14	3.56	0.0013	0.15	152	0.19	21.47	0.021	0.53	0.16	4.06	SST	N		
TO-5056L	0.206	5.23	0.27	6.86	1	25.40	0.28	7.11	0.0049	0.55	148	0.72	81.35	7	Left	0.032	0.81	0.17	4.32	MW	N
TO-5056LS	0.206	5.23	0.27	6.86	1	25.40	0.28	7.11	0.0046	0.52	136	0.62	70.05	7	Left	0.032	0.81	0.17	4.32	SST	N
TO-5056R	0.206	5.23	0.27	6.86	1	25.40	0.28	7.11	0.0049	0.55	148	0.72	81.35	7	Right	0.032	0.81	0.17	4.32	MW	N
TO-5056RS	0.206	5.23	0.27	6.86	1	25.40	0.28	7.11	0.0046	0.52	136	0.62	70.05	7	Right	0.032	0.81	0.17	4.32	SST	N
TO-5044RS	0.21	5.33	0.246	6.25	0.75	19.05	0.15	3.81	0.0005	0.06	229	0.12	13.56	6.75	Right	0.018	0.46	0.16	4.06	SST	N
TO-5044L	0.21	5.33	0.246	6.25	0.75	19.05	0.15	3.81	0.0006	0.07	254	0.14	15.82	6.75	Left	0.018	0.46	0.16	4.06	MW	N
TO-5044LS	0.21	5.33	0.246	6.25	0.75	19.05	0.15	3.81	0.0005	0.06	229	0.12	13.56	6.75	Left	0.018	0.46	0.16	4.06	SST	N
TO-5044R	0.21	5.33	0.246	6.25	0.75	19.05	0.15	3.81	0.0006	0.07	254	0.14	15.82	6.75	Right	0.018	0.46	0.16	4.06	MW	N
TO-1044	0.21	5.33	0.324	8.23	0.79	20.07	0.38	9.65	0.061	6.90	45	2.7	305.05	5	Left	0.057	1.45	0.17	4.32	HD	Z
TO-5054L	0.211	5.36	0.267	6.78	1	25.40	0.13	3.30	0.0061	0.69	80	0.49	55.36	3.25	Left	0.028	0.71	0.17	4.32	MW	N
TO-5054LS	0.211	5.36	0.267	6.78	1	25.40	0.13	3.30	0.0057	0.64	74	0.42	47.45	3.25	Left	0.028	0.71	0.17	4.32	SST	N
TO-5054R	0.211	5.36	0.267	6.78	1	25.40	0.13	3.30	0.0061	0.69	80	0.49	55.36	3.25	Right	0.028	0.71	0.17	4.32	MW	N
TO-5054RS	0.211	5.36	0.267	6.78	1	25.40	0.13	3.30	0.0057	0.64	74	0.42	47.45	3.25	Right	0.028	0.71	0.17	4.32	SST	N
TO-5058L	0.211	5.36	0.271	6.88	1	25.40	0.39	9.91	0.0025	0.28	237	0.6	67.79	10.75	Left	0.03	0.76	0.17	4.32	MW	N
TO-5058LS	0.211	5.36	0.271	6.88	1	25.40	0.39	9.91	0.0023	0.26	221	0.52	58.75	10.75	Left	0.03	0.76	0.17	4.32	SST	N
TO-5058R	0.211	5.36	0.271	6.88	1	25.40	0.39	9.91	0.0025	0.28	237	0.6	67.79	10.75	Right	0.03	0.76	0.17	4.32	MW	N
TO-5058RS	0.211	5.36	0.271	6.88	1	25.40	0.39	9.91	0.0023	0.26	221	0.52	58.75	10.75	Right	0.03	0.76	0.17	4.32	SST	N
TO-5052L	0.213	5.41	0.259	6.58	1	25.40	0.15	3.81	0.0018	0.20	160	0.29	32.76	5	Left	0.023	0.58	0.17	4.32	MW	N
TO-5052LS	0.213	5.41	0.259	6.58	1	25.40	0.15	3.81	0.0017	0.19	146	0.25	28.25	5	Left	0.023	0.58	0.17	4.32	SST	N
TO-5052R	0.213	5.41	0.259	6.58	1	25.40	0.15	3.81	0.0018	0.20	160	0.29	32.76	5	Right	0.023	0.58	0.17	4.32	MW	N
TO-5052RS	0.213	5.41	0.259	6.58	1	25.40	0.15	3.81	0.0017	0.19	146	0.25	28.25	5	Right	0.023	0.58	0.17	4.32	SST	N
TO-5061LS	0.213	5.41	0.273	6.93	1	25.40	0.26	6.60	0.0035	0.40	147	0.52	58.75	7	Left	0.03	0.76	0.17	4.32	SST	N
TO-5061L	0.213	5.41	0.273	6.93	1	25.40	0.26	6.60	0.0038	0.43	158	0.6	67.79	7	Left	0.03	0.76	0.17	4.32	MW	N
TO-5061R	0.213	5.41	0.273	6.93	1	25.40	0.26	6.60	0.0038	0.43	158	0.6	67.79	7	Right	0.03	0.76	0.17	4.32	MW	N
TO-5061RS	0.213	5.41	0.273	6.93	1	25.40	0.26	6.60	0.0035	0.40	147	0.52	58.75	7	Right	0.03	0.76	0.17	4.32	SST	N
TO-5050L	0.214	5.44	0.254	6.45	1	25.40	0.23	5.84	0.0006	0.07	348	0.19	21.47	9.5	Left	0.02	0.51	0.17	4.32	MW	N
TO-5050LS	0.214	5.44	0.254	6.45	1	25.40	0.23	5.84	0.0005	0.06	314	0.16	18.08	9.5	Left	0.02	0.51	0.17	4.32	SST	N
TO-5050R	0.214	5.44	0.254	6.45	1	25.40	0.23	5.84	0.0006	0.07	348	0.19	21.47	9.5	Right	0.02	0.51	0.17	4.32	MW	N
TO-5050RS	0.214	5.44	0.254	6.45	1	25.40	0.23	5.84	0.0005	0.06	314	0.16	18.08	9.5	Right	0.02	0.51	0.17	4.32	SST	N
TO-5047L	0.215	5.46	0.249	6.32	0.75	19.05	0.09	2.29	0.0007	0.08	177	0.12	13.56	4	Left	0.017	0.43	0.16	4.06	MW	N
TO-5047LS	0.215	5.46	0.249	6.32	0.75	19.05	0.09	2.29	0.0007	0.08	158	0.1	11.30	4	Left	0.017	0.43	0.16	4.06	SST	N
TO-5047R	0.215	5.46	0.249	6.32	0.75	19.05	0.09	2.29	0.0007	0.08	177	0.12	13.56	4	Right	0.017	0.43	0.16	4.06	MW	N
TO-5047RS	0.215	5.46	0.249	6.32	0.75	19.05	0.09	2.29	0.0007	0.08	158	0.1	11.30	4	Right	0.017	0.43	0.16	4.06	SST	N
TO-1061	0.218	5.54	0.272	6.91	0.8	20.32	0.28	7.11	0.0019	0.21	203	0.38	42.93	8.375	Left	0.027	0.69	0.17	4.32	SST	N
TO-1057	0.218	5.54	0.304	7.72	0.46	11.68	0.5	12.70	0.0098	1.11	143	1.4	158.17	9.625	Left	0.043	1.09	0.18	4.57	SST	N
TO-1019	0.218	5.54	0.346	8.79	1.1	27.94	2.22	55.88	0.0142	1.61	291	4.1	463.22	30.25	Right	0.064	1.63	0.18	4.57	SST	N
TO-1005	0.218	5.54	0.368	9.35	1.1	27.94	2.25	57.15	0.0296	3.35	206	6.1	689.18	26.25	Right	0.075	1.91	0.18	4.57	SST	N
TO-1100	0.221	5.61	0.281	7.14	1	25.40	0.16	4.06	0.0062	0.70	83	0.52	58.75	3.75	Left	0.03	0.76	0.18	4.57	SST	N
TO-1085	0.224	5.69	0.288	7.32	1	25.40	0.18	4.57	0.0069	0.78	90	0.62	70.05	4.25	Right	0.032	0.81	0.18	4.57	SST	N
TO-5065L	0.224	5.69	0.288	7.32	1	25.40	0.15	3.81	0.0097	1.10	75	0.72	81.35	3.25	Left	0.032	0.81	0.18	4.57	MW	N
TO-5065LS	0.224	5.69	0.288	7.32	1	25.40	0.15	3.81	0.0091	1.03	69	0.62	70.05	3.25	Left	0.032	0.81	0.18	4.57	SST	N
TO-5065R	0.224	5.69	0.288	7.32	1	25.40	0.15	3.81	0.0097	1.10	75	0.72	81.35	3.25	Right	0.032	0.81	0.18	4.57	MW	N
TO-5065RS	0.224	5.69	0.288	7.32	1	25.40	0.15	3.81	0.0091	1.03	69	0.62	70.05	3.25	Right	0.032	0.81	0.18	4.57	SST	N
TO-5051L	0.225	5.72	0.259	6.58	0.75	19.05	0.13	3.30	0.0005	0.06	254	0.12	13.56	5.75	Left	0.017	0.43	0.16	4.06	MW	N
TO-5051LS	0.225	5.72	0.259	6.58	0.75	19.05	0.13	3.30	0.0004	0.05	232	0.1	11.30	5.75	Left	0.017	0.43	0.16	4.06	SST	N
TO-5051R	0.225	5.72	0.259	6.58	0.75	19.05	0.13	3.30	0.0005	0.06	254	0.12	13.56	5.75	Right	0.017	0.43	0.17	4.32	MW	N
TO-5051RS	0.225	5.72	0.259	6.58	0.75	19.05	0.13	3.30	0.0004	0.05	232	0.1	11.30	5.75	Right	0.017	0.43	0.17	4.32	SST	N
TO-5057L	0.225	5.72	0.271	6.88	1	25.40	0.27	6.86	0.0009	0.10	314	0.29	32.76	9.5	Left	0.023	0.58	0.18	4.57	MW	N
TO-5057LS	0.225	5.72	0.271	6.88	1	25.40	0.27	6.86	0.0009	0.10	297	0.25	28.25	9.5	Left	0.023	0.58	0.18	4.57	SST	N
TO-5057R	0.225	5.72	0.271	6.88	1	25.40	0.27	6.86	0.0009	0.10	314	0.29	32.76	9.5	Right	0.023	0.58	0.18	4.57	MW	N
TO-5057RS	0.225	5.72	0.271	6.88	1	25.40	0.27	6.86	0.0009	0.10	297	0.25	28.25	9.5	Right	0.023	0.58	0.18	4.57	SST	N
TO-11																					



Century Spring


Torsion Springs

Century Stock Number	I.D.		O.D.		Leg Length Inches mm	Body Length Inches mm	Rate		Sugg. Max Defl. Deg	Sugg. Max. Load In-Lbs. N-mm	No. of Coils	Wind Dir.	Wire Dia.		Sugg. Mandrel Dia.		Mat'l	F n sh	
	Inches	mm	Inches	mm			In-lbs. Deg	N-mm Deg					Inches	mm	Inches	mm			
TO-5064RS	0.241	6.12	0.283	7.19	1	25.40	0.18	4.57	0.0008	0.09	242	0.2	22.60	6.75	Right	0.021	0.53	0.19	4.83 SST N
TO-5069L	0.242	6.15	0.312	7.92	1.3	33.02	0.45	11.43	0.004	0.45	227	0.9	101.68	10.75	Left	0.035	0.89	0.19	4.83 MW N
TO-5069LS	0.242	6.15	0.312	7.92	1.3	33.02	0.45	11.43	0.0037	0.42	211	0.78	88.12	10.75	Left	0.035	0.89	0.2	5.08 SST N
TO-5069R	0.242	6.15	0.312	7.92	1.3	33.02	0.45	11.43	0.004	0.45	227	0.9	101.68	10.75	Right	0.035	0.89	0.19	4.83 MW N
TO-5069RS	0.242	6.15	0.312	7.92	1.3	33.02	0.45	11.43	0.0037	0.42	211	0.78	88.12	10.75	Right	0.035	0.89	0.2	5.08 SST N
TO-1112	0.243	6.17	0.329	8.36	1.92	48.77	0.13	3.30	0.0021	0.24	776	1.6	180.77	44	Left	0.043	1.09	0.2	5.08 MW Z
TO-5068L	0.245	6.22	0.305	7.75	1	25.40	0.14	3.56	0.0076	0.86	80	0.61	68.92	3.25	Left	0.03	0.76	0.19	4.83 MW N
TO-5068LS	0.245	6.22	0.305	7.75	1	25.40	0.14	3.56	0.007	0.79	74	0.52	58.75	3.25	Left	0.03	0.76	0.2	5.08 SST N
TO-5068R	0.245	6.22	0.305	7.75	1	25.40	0.14	3.56	0.0076	0.86	80	0.61	68.92	3.25	Right	0.03	0.76	0.19	4.83 MW N
TO-5068RS	0.245	6.22	0.305	7.75	1	25.40	0.14	3.56	0.007	0.79	74	0.52	58.75	3.25	Right	0.03	0.76	0.2	5.08 SST N
TO-1086	0.245	6.22	0.315	8.00	1.3	33.02	0.18	4.57	0.0103	1.16	76	0.79	89.25	3.75	Right	0.035	0.89	0.2	5.08 SST N
TO-5070L	0.246	6.25	0.316	8.03	1.3	33.02	0.16	4.06	0.0119	1.35	76	0.9	101.68	3.25	Left	0.035	0.89	0.2	5.08 MW N
TO-5070LS	0.246	6.25	0.316	8.03	1.3	33.02	0.16	4.06	0.0111	1.25	71	0.78	88.12	3.25	Left	0.035	0.89	0.2	5.08 SST N
TO-5070R	0.246	6.25	0.316	8.03	1.3	33.02	0.16	4.06	0.0119	1.35	76	0.9	101.68	3.25	Right	0.035	0.89	0.2	5.08 MW N
TO-5070RS	0.246	6.25	0.316	8.03	1.3	33.02	0.16	4.06	0.0111	1.25	71	0.78	88.12	3.25	Right	0.035	0.89	0.2	5.08 SST N
TO-1131	0.247	6.27	0.315	8.00	1.3	33.02	0.16	4.06	0.0105	1.19	72	0.75	84.74	3.25	Left	0.034	0.86	0.2	5.08 SST N
TO-1001	0.25	6.35	0.308	7.82	0.76	19.30	0.51	12.95	0.0013	0.15	423	0.55	62.14	15	Left	0.029	0.74	0.2	5.08 MW N
TO-1027	0.25	6.35	0.352	8.94	1.1	27.94	1.78	45.21	0.0053	0.60	416	2.2	248.56	30.75	Left	0.051	1.30	0.2	5.08 SST N
TO-5067L	0.255	6.48	0.305	7.75	1	25.40	0.17	4.32	0.0023	0.26	152	0.36	40.67	5	Left	0.025	0.64	0.2	5.08 MW N
TO-5067LS	0.255	6.48	0.305	7.75	1	25.40	0.17	4.32	0.0021	0.24	144	0.31	35.02	5	Left	0.025	0.64	0.2	5.08 SST N
TO-5067R	0.255	6.48	0.305	7.75	1	25.40	0.17	4.32	0.0023	0.26	152	0.36	40.67	5	Right	0.025	0.64	0.2	5.08 MW N
TO-5067RS	0.255	6.48	0.305	7.75	1	25.40	0.17	4.32	0.0021	0.24	144	0.31	35.02	5	Right	0.025	0.64	0.2	5.08 SST N
TO-5073L	0.255	6.48	0.335	8.51	1.3	33.02	0.23	5.84	0.0167	1.89	80	1.3	146.87	4.25	Left	0.04	1.02	0.21	5.33 MW N
TO-5073LS	0.255	6.48	0.335	8.51	1.3	33.02	0.23	5.84	0.0154	1.74	75	1.2	135.58	4.25	Left	0.04	1.02	0.21	5.33 SST N
TO-5073R	0.255	6.48	0.335	8.51	1.3	33.02	0.23	5.84	0.0167	1.89	80	1.3	146.87	4.25	Right	0.04	1.02	0.21	5.33 MW N
TO-5073RS	0.255	6.48	0.335	8.51	1.3	33.02	0.23	5.84	0.0154	1.74	75	1.2	135.58	4.25	Right	0.04	1.02	0.21	5.33 SST N
TO-1012	0.265	6.73	0.359	9.12	0.32	8.13	0.1	2.54	0.1207	13.64	18	2.1	237.26	1	Left	0.047	1.19	0.21	5.33 MW N
TO-1040	0.265	6.73	0.399	10.13	0.79	20.07	0.38	9.65	0.1135	12.83	40	4.5	508.41	4.125	Left	0.067	1.70	0.22	5.59 HD Z
TO-5080L	0.267	6.78	0.357	9.07	1.3	33.02	0.26	6.60	0.0239	2.70	79	1.9	214.66	4.25	Left	0.045	1.14	0.22	5.59 MW N
TO-5080LS	0.267	6.78	0.357	9.07	1.3	33.02	0.26	6.60	0.0223	2.52	74	1.6	180.77	4.25	Left	0.045	1.14	0.22	5.59 SST N
TO-5080R	0.267	6.78	0.357	9.07	1.3	33.02	0.26	6.60	0.0239	2.70	79	1.9	214.66	4.25	Right	0.045	1.14	0.22	5.59 MW N
TO-5080RS	0.267	6.78	0.357	9.07	1.3	33.02	0.26	6.60	0.0223	2.52	74	1.6	180.77	4.25	Right	0.045	1.14	0.22	5.59 SST N
TO-5076RS	0.269	6.83	0.349	8.86	1.3	33.02	0.4	10.16	0.0077	0.87	151	1.2	135.58	8	Right	0.04	1.02	0.22	5.59 SST N
TO-5076L	0.269	6.83	0.349	8.86	1.3	33.02	0.4	10.16	0.0083	0.94	161	1.3	146.87	8	Left	0.04	1.02	0.22	5.59 MW N
TO-5076LS	0.269	6.83	0.349	8.86	1.3	33.02	0.4	10.16	0.0077	0.87	151	1.2	135.58	8	Left	0.04	1.02	0.22	5.59 SST N
TO-5076R	0.269	6.83	0.349	8.86	1.3	33.02	0.4	10.16	0.0083	0.94	161	1.3	146.87	8	Right	0.04	1.02	0.22	5.59 MW N
TO-5072L	0.273	6.93	0.329	8.36	1	25.40	0.27	6.86	0.0019	0.21	227	0.43	48.58	7.75	Left	0.028	0.71	0.21	5.33 MW N
TO-5072LS	0.273	6.93	0.329	8.36	1	25.40	0.27	6.86	0.002	0.23	245	0.5	56.49	7.75	Right	0.028	0.71	0.21	5.33 SST N
TO-5072R	0.273	6.93	0.329	8.36	1	25.40	0.27	6.86	0.0019	0.21	227	0.43	48.58	7.75	Right	0.028	0.71	0.21	5.33 SST N
TO-5071L	0.275	6.99	0.325	8.26	1	25.40	0.29	7.37	0.0012	0.14	305	0.36	40.67	9.5	Left	0.025	0.64	0.21	5.33 MW N
TO-5071LS	0.275	6.99	0.325	8.26	1	25.40	0.29	7.37	0.0011	0.12	291	0.31	35.02	9.5	Left	0.025	0.64	0.22	5.59 SST N
TO-5071R	0.275	6.99	0.325	8.26	1	25.40	0.29	7.37	0.0012	0.14	305	0.36	40.67	9.5	Right	0.025	0.64	0.21	5.33 MW N
TO-5071RS	0.275	6.99	0.325	8.26	1	25.40	0.29	7.37	0.0011	0.12	291	0.31	35.02	9.5	Right	0.025	0.64	0.22	5.59 SST N
TO-1116	0.275	6.99	0.385	9.78	0.6	15.24	0.41	10.41	0.0372	4.21	85	3.2	361.54	5.75	Right	0.055	1.40	0.22	5.59 MW N
TO-5077L	0.277	7.04	0.353	8.97	1.3	33.02	0.49	12.45	0.0047	0.53	244	1.2	135.58	10.75	Left	0.038	0.97	0.22	5.59 MW N
TO-5077LS	0.277	7.04	0.353	8.97	1.3	33.02	0.49	12.45	0.0044	0.50	229	1	112.98	10.75	Left	0.038	0.97	0.22	5.59 SST N
TO-5077R	0.277	7.04	0.353	8.97	1.3	33.02	0.49	12.45	0.0047	0.53	244	1.2	135.58	10.75	Right	0.038	0.97	0.22	5.59 MW N
TO-5077RS	0.277	7.04	0.353	8.97	1.3	33.02	0.49	12.45	0.0044	0.50	229	1	112.98	10.75	Right	0.038	0.97	0.22	5.59 SST N
TO-5082L	0.279	7.09	0.359	9.12	1.3	33.02	0.56	14.22	0.0056	0.63	242	1.3	146.87	11.75	Left	0.04	1.02	0.22	5.59 MW N
TO-5082LS	0.279	7.09	0.359	9.12	1.3	33.02	0.56	14.22	0.0051	0.58	228	1.2	135.58	11.75	Left	0.04	1.02	0.23	5.84 SST N
TO-5082R	0.279	7.09	0.359	9.12	1.3	33.02	0.56	14.22	0.0056	0.63	242	1.3	146.87	11.75	Right	0.04	1.02	0.22	5.59 MW N
TO-1088	0.279	7.09	0.375	9.53	1.3	33.02	0.28	7.11	0.0275	3.11	72	2	225.96	4.25	Right	0.0475	1.21	0.23	5.84 SST N
TO-1058	0.281	7.14	0.331	8.41	1.1	27.94	0.3	7.62	0.001	0.11	290	0.29	32.76	9.875	Right	0.025	0.64	0.22	5.59 SPR N
TO-1013	0.281	7.14	0.351	8.92	0.43	10.92	0.25	6.35	0.0067	0.76	137	0.91	102.81	5.5	Left	0.035	0.89	0.22	5.59 MW N
TO-5074L	0.284																		

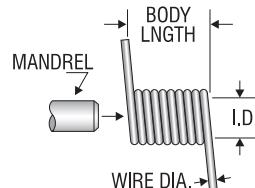

Torsion Springs

Century Stock Number	I.D. Inches mm	O.D. Inches mm	Leg Length Inches mm	Body Length Inches mm	Rate In-lbs. Deg	Sugg. Max. Defl. Deg	Sugg. Max. Load In-lbs. N-mm	No. of Coils	Wind Dir.	Wire Dia.		Sugg. Mandrel Dia. Inches mm	Mat'l	F n sh							
										Inches	mm										
TO-5075R	0.291	7.39	0.341	8.66	1	25.40	0.21	5.33	0.0016	0.18	230	0.36	40.67	6.75	Right	0.025	0.64	0.23	5.84	MW	N
TO-5075RS	0.291	7.39	0.341	8.66	1	25.40	0.21	5.33	0.0014	0.16	219	0.31	35.02	6.75	Right	0.025	0.64	0.23	5.84	SST	N
TO-5102L	0.292	7.42	0.382	9.70	1.3	33.02	0.63	16.00	0.008	0.90	239	1.9	214.66	11.75	Left	0.045	1.14	0.23	5.84	MW	N
TO-5102LS	0.292	7.42	0.382	9.70	1.3	33.02	0.63	16.00	0.0074	0.84	224	1.7	192.07	11.75	Left	0.045	1.14	0.24	6.10	SST	N
TO-5102R	0.292	7.42	0.382	9.70	1.3	33.02	0.63	16.00	0.008	0.90	239	1.9	214.66	11.75	Right	0.045	1.14	0.23	5.84	MW	N
TO-5102RS	0.292	7.42	0.382	9.70	1.3	33.02	0.63	16.00	0.0074	0.84	224	1.7	192.07	11.75	Right	0.045	1.14	0.24	6.10	SST	N
TO-5104L	0.292	7.42	0.388	9.86	1.3	33.02	0.28	7.11	0.0306	3.46	75	2.3	259.85	4.25	Left	0.048	1.22	0.24	6.10	MW	N
TO-5104LS	0.292	7.42	0.388	9.86	1.3	33.02	0.28	7.11	0.0281	3.18	71	2	225.96	4.25	Left	0.0475	1.21	0.24	6.10	SST	N
TO-5104R	0.292	7.42	0.388	9.86	1.3	33.02	0.28	7.11	0.0306	3.46	75	2.3	259.85	4.25	Right	0.048	1.22	0.24	6.10	MW	N
TO-5104RS	0.292	7.42	0.388	9.86	1.3	33.02	0.28	7.11	0.0281	3.18	71	2	225.96	4.25	Right	0.0475	1.21	0.24	6.10	SST	N
TO-1042	0.296	7.52	0.372	9.45	2.3	58.42	3.8	96.52	0.0005	0.06	2143	1.1	124.28	90	Left	0.038	0.97	0.24	6.10	MW	Z
TO-1072	0.297	7.54	0.355	9.02	1.7	43.18	0.5	12.70	0.0011	0.12	395	0.45	50.84	14.75	Right	0.029	0.74	0.23	5.84	SPR	N
TO-1055	0.297	7.54	0.439	11.15	0.75	19.05	0.67	17.02	0.0699	7.90	73	5.1	576.20	7.625	Right	0.071	1.80	0.25	6.35	SPR	GI
TO-5079L	0.299	7.59	0.355	9.02	1	25.40	0.32	8.13	0.0015	0.17	329	0.5	56.49	9.5	Left	0.028	0.71	0.23	5.84	MW	N
TO-5079LS	0.299	7.59	0.355	9.02	1	25.40	0.32	8.13	0.0014	0.16	301	0.43	48.58	9.5	Left	0.028	0.71	0.23	5.84	SST	N
TO-5079R	0.299	7.59	0.355	9.02	1	25.40	0.32	8.13	0.0015	0.17	329	0.5	56.49	9.5	Right	0.028	0.71	0.23	5.84	MW	N
TO-5079RS	0.299	7.59	0.355	9.02	1	25.40	0.32	8.13	0.0014	0.16	301	0.43	48.58	9.5	Right	0.028	0.71	0.23	5.84	SST	N
TO-5091L	0.302	7.67	0.366	9.30	1	25.40	0.21	5.33	0.0049	0.55	152	0.74	83.61	5	Left	0.032	0.81	0.24	6.10	MW	N
TO-5091LS	0.302	7.67	0.366	9.30	1	25.40	0.21	5.33	0.0046	0.52	140	0.64	72.31	5	Left	0.032	0.81	0.24	6.10	SST	N
TO-5091R	0.302	7.67	0.366	9.30	1	25.40	0.21	5.33	0.0049	0.55	152	0.74	83.61	5	Right	0.032	0.81	0.24	6.10	MW	N
TO-5091RS	0.302	7.67	0.366	9.30	1	25.40	0.21	5.33	0.0046	0.52	140	0.64	72.31	5	Right	0.032	0.81	0.24	6.10	SST	N
TO-5093L	0.305	7.75	0.369	9.37	1	25.40	0.31	7.87	0.0031	0.35	237	0.74	83.61	7.875	Left	0.032	0.81	0.24	6.10	MW	N
TO-5093R	0.305	7.75	0.369	9.37	1	25.40	0.31	7.87	0.0031	0.35	237	0.74	83.61	7.875	Right	0.032	0.81	0.24	6.10	MW	N
TO-5096L	0.305	7.75	0.375	9.53	1.3	33.02	0.34	8.64	0.0044	0.50	209	0.92	103.94	7.875	Left	0.035	0.89	0.24	6.10	MW	N
TO-5096R	0.305	7.75	0.375	9.53	1.3	33.02	0.34	8.64	0.0044	0.50	209	0.92	103.94	7.875	Right	0.035	0.89	0.24	6.10	MW	N
TO-5107L	0.306	7.77	0.408	10.36	2	50.80	0.29	7.37	0.0344	3.89	75	2.6	293.75	4.25	Left	0.051	1.30	0.25	6.35	MW	N
TO-5107LS	0.306	7.77	0.408	10.36	2	50.80	0.29	7.37	0.0322	3.64	70	2.2	248.56	4.25	Left	0.051	1.30	0.25	6.35	SST	N
TO-5107R	0.306	7.77	0.408	10.36	2	50.80	0.29	7.37	0.0344	3.89	75	2.6	293.75	4.25	Right	0.051	1.30	0.25	6.35	MW	N
TO-5107RS	0.306	7.77	0.408	10.36	2	50.80	0.29	7.37	0.0322	3.64	70	2.2	248.56	4.25	Right	0.051	1.30	0.25	6.35	SST	N
TO-5088L	0.307	7.80	0.365	9.27	1	25.40	0.16	4.06	0.0039	0.44	142	0.56	63.27	4.125	Left	0.029	0.74	0.24	6.10	MW	N
TO-5088R	0.307	7.80	0.365	9.27	1	25.40	0.16	4.06	0.0039	0.44	142	0.56	63.27	4.125	Right	0.029	0.74	0.24	6.10	MW	N
TO-5094L	0.307	7.80	0.371	9.42	1	25.40	0.18	4.57	0.0058	0.66	129	0.74	83.61	4.125	Left	0.032	0.81	0.24	6.10	MW	N
TO-5094R	0.307	7.80	0.371	9.42	1	25.40	0.18	4.57	0.0058	0.66	129	0.74	83.61	4.125	Right	0.032	0.81	0.24	6.10	MW	N
TO-5095L	0.307	7.80	0.371	9.42	1	25.40	0.41	10.41	0.0023	0.26	319	0.75	84.74	10.625	Left	0.032	0.81	0.24	6.10	MW	N
TO-5095R	0.307	7.80	0.371	9.42	1	25.40	0.41	10.41	0.0023	0.26	319	0.75	84.74	10.625	Right	0.032	0.81	0.24	6.10	MW	N
TO-5098L	0.307	7.80	0.377	9.58	1.3	33.02	0.2	5.08	0.008	0.90	115	0.92	103.94	4.125	Left	0.035	0.89	0.24	6.10	MW	N
TO-5098R	0.307	7.80	0.377	9.58	1.3	33.02	0.2	5.08	0.008	0.90	115	0.92	103.94	4.125	Right	0.035	0.89	0.24	6.10	MW	N
TO-5099L	0.307	7.80	0.377	9.58	1.3	33.02	0.45	11.43	0.0033	0.37	279	0.92	103.94	10.625	Left	0.035	0.89	0.24	6.10	MW	N
TO-5099R	0.307	7.80	0.377	9.58	1.3	33.02	0.45	11.43	0.0033	0.37	279	0.92	103.94	10.625	Right	0.035	0.89	0.24	6.10	MW	N
TO-5090L	0.308	7.82	0.366	9.30	1	25.40	0.25	6.35	0.0024	0.27	229	0.56	63.27	6.875	Left	0.029	0.74	0.24	6.10	MW	N
TO-5090R	0.308	7.82	0.366	9.30	1	25.40	0.25	6.35	0.0024	0.27	229	0.56	63.27	6.875	Right	0.029	0.74	0.24	6.10	MW	N
TO-1089	0.308	7.82	0.404	10.26	1.3	33.02	0.48	12.19	0.0134	1.51	149	2	225.96	8	Right	0.0475	1.21	0.25	6.35	SST	N
TO-1102	0.308	7.82	0.404	10.26	1.3	33.02	0.48	12.19	0.0134	1.51	149	2	225.96	8	Left	0.0475	1.21	0.25	6.35	SST	N
TO-5092L	0.309	7.85	0.367	9.32	1	25.40	0.34	8.64	0.0018	0.20	317	0.56	63.27	9.625	Left	0.029	0.74	0.24	6.10	MW	N
TO-5092R	0.309	7.85	0.367	9.32	1	25.40	0.34	8.64	0.0018	0.20	317	0.56	63.27	9.625	Right	0.029	0.74	0.24	6.10	MW	N
TO-5106L	0.309	7.85	0.405	10.29	1.3	33.02	0.48	12.19	0.0153	1.73	151	2.3	259.85	8	Left	0.048	1.22	0.25	6.35	MW	N
TO-5106LS	0.309	7.85	0.405	10.29	1.3	33.02	0.48	12.19	0.0141	1.59	143	2	225.96	8	Left	0.0475	1.21	0.25	6.35	SST	N
TO-5106R	0.309	7.85	0.405	10.29	1.3	33.02	0.48	12.19	0.0153	1.73	151	2.3	259.85	8	Right	0.048	1.22	0.25	6.35	MW	N
TO-5106RS	0.309	7.85	0.405	10.29	1.3	33.02	0.48	12.19	0.0141	1.59	143	2	225.96	8	Right	0.0475	1.21	0.25	6.35	SST	N
TO-5103R	0.311	7.87	0.386	9.80	1.3	33.02	0.18	4.57	0.0133	1.50	77	1	112.98	3.25	Right	0.038	0.97	0.25	6.35	SST	N
TO-5103L	0.311	7.87	0.386	9.80	1.3	33.02	0.18	4.57	0.012	1.36	82	1.2	135.58	3.25	Left	0.038	0.97	0.25	6.35	MW	N
TO-5103S	0.311	7.87	0.386	9.80	1.3																




Century Spring

Torsion Springs


Torsion Springs

Century Stock Number	I.D.		O.D.		Leg Length Inches mm	Body Length Inches mm	Rate		Sugg. Max Defl. Deg	Sugg. Max. Load In-Lbs. N-mm	No. of Coils	Wind Dir.	Wire Dia.		Sugg. Mandrel Dia.		Mat'l	F n sh		
	Inches	mm	Inches	mm			In-lbs. Deg	N-mm Deg					Inches	mm	Inches	mm				
TO-5101RS	0.318	8.08	0.382	9.70	1	25.40	0.37	9.40	0.0023	0.26	282	0.64	72.31	9.5	Right	0.032	0.81	0.25	6.35	SST N
TO-5109L	0.321	8.15	0.417	10.59	1.3	33.02	0.67	17.02	0.0102	1.15	227	2.3	259.85	11.75	Left	0.048	1.22	0.26	6.60	MW N
TO-5109LS	0.321	8.15	0.417	10.59	1.3	33.02	0.67	17.02	0.0094	1.06	215	2	225.96	11.75	Left	0.0475	1.21	0.26	6.60	SST N
TO-5109R	0.321	8.15	0.417	10.59	1.3	33.02	0.67	17.02	0.0102	1.15	227	2.3	259.85	11.75	Right	0.048	1.22	0.26	6.60	MW N
TO-5109RS	0.321	8.15	0.417	10.59	1.3	33.02	0.67	17.02	0.0094	1.06	215	2	225.96	11.75	Right	0.0475	1.21	0.26	6.60	SST N
TO-1128	0.323	8.20	0.425	10.80	2	50.80	0.43	10.92	0.0207	2.34	101	2.1	237.26	6.75	Left	0.051	1.30	0.26	6.60	HD Z
TO-1077	0.328	8.33	0.394	10.01	0.45	11.43	0.12	3.05	0.0107	1.21	62	0.66	74.57	2.375	Right	0.033	0.84	0.26	6.60	SPR N
TO-5110L	0.328	8.33	0.43	10.92	2	50.80	0.5	12.70	0.0172	1.94	151	2.6	293.75	8	Left	0.051	1.30	0.26	6.60	MW N
TO-5110LS	0.328	8.33	0.43	10.92	2	50.80	0.5	12.70	0.0161	1.82	140	2.3	259.85	8	Left	0.051	1.30	0.27	6.86	SST N
TO-5110R	0.328	8.33	0.43	10.92	2	50.80	0.5	12.70	0.0172	1.94	151	2.6	293.75	8	Right	0.051	1.30	0.26	6.60	MW N
TO-5110RS	0.328	8.33	0.43	10.92	2	50.80	0.5	12.70	0.0161	1.82	140	2.3	259.85	8	Right	0.051	1.30	0.27	6.86	SST N
TO-1032	0.328	8.33	0.436	11.07	1.1	27.94	1.11	28.19	0.0097	1.10	254	2.5	282.45	17.625	Left	0.054	1.37	0.27	6.86	HD Z
TO-5105L	0.335	8.51	0.395	10.03	1	25.40	0.2	5.08	0.0038	0.43	163	0.62	70.05	5	Left	0.03	0.76	0.26	6.60	MW N
TO-5105LS	0.335	8.51	0.395	10.03	1	25.40	0.2	5.08	0.0035	0.40	152	0.53	59.88	5	Left	0.03	0.76	0.26	6.60	SST N
TO-5105R	0.335	8.51	0.395	10.03	1	25.40	0.2	5.08	0.0038	0.43	163	0.62	70.05	5	Right	0.03	0.76	0.26	6.60	MW N
TO-5105RS	0.335	8.51	0.395	10.03	1	25.40	0.2	5.08	0.0035	0.40	152	0.53	59.88	5	Right	0.03	0.76	0.26	6.60	SST N
TO-5112L	0.337	8.56	0.439	11.15	2	50.80	0.72	18.29	0.0115	1.30	227	2.6	293.75	11.75	Left	0.051	1.30	0.27	6.86	MW N
TO-5112LS	0.337	8.56	0.439	11.15	2	50.80	0.72	18.29	0.0107	1.21	211	2.3	259.85	11.75	Left	0.051	1.30	0.27	6.86	SST N
TO-5112R	0.337	8.56	0.439	11.15	2	50.80	0.72	18.29	0.0115	1.30	227	2.6	293.75	11.75	Right	0.051	1.30	0.27	6.86	MW N
TO-5112RS	0.337	8.56	0.439	11.15	2	50.80	0.72	18.29	0.0107	1.21	211	2.3	259.85	11.75	Right	0.051	1.30	0.27	6.86	SST N
TO-1125	0.34	8.64	0.55	13.97	3.5	88.90	1.04	26.42	0.2459	27.80	66	16	1807.68	8	Right	0.105	2.67	0.28	7.11	SST N
TO-1126	0.34	8.64	0.55	13.97	3.5	88.90	1.04	26.42	0.2459	27.80	66	16	1807.68	8	Left	0.105	2.67	0.28	7.11	SST N
TO-1002	0.343	8.71	0.437	11.10	0.66	16.76	0.81	20.57	0.0066	0.75	272	1.8	203.36	14.75	Right	0.047	1.19	0.28	7.11	HD Z
TO-1025	0.343	8.71	0.493	12.52	0.91	23.11	0.42	10.67	0.1416	16.01	43	6.1	689.18	4.125	Left	0.075	1.91	0.28	7.11	SPR Z
TO-5108L	0.35	8.89	0.41	10.41	1	25.40	0.35	8.89	0.0019	0.21	329	0.62	70.05	9.5	Left	0.03	0.76	0.27	6.86	MW N
TO-5108LS	0.35	8.89	0.41	10.41	1	25.40	0.35	8.89	0.0018	0.20	307	0.54	61.01	9.5	Left	0.03	0.76	0.27	6.86	SST N
TO-5108R	0.35	8.89	0.41	10.41	1	25.40	0.35	8.89	0.0019	0.21	329	0.62	70.05	9.5	Right	0.03	0.76	0.27	6.86	MW N
TO-5108RS	0.35	8.89	0.41	10.41	1	25.40	0.35	8.89	0.0018	0.20	307	0.54	61.01	9.5	Right	0.03	0.76	0.27	6.86	SST N
TO-5111L	0.366	9.30	0.436	11.07	1.3	33.02	0.34	8.64	0.004	0.45	234	0.93	105.07	7.75	Left	0.035	0.89	0.29	7.37	MW N
TO-5111LS	0.366	9.30	0.436	11.07	1.3	33.02	0.34	8.64	0.0037	0.42	218	0.81	91.51	7.75	Left	0.035	0.89	0.29	7.37	SST N
TO-5111R	0.366	9.30	0.436	11.07	1.3	33.02	0.34	8.64	0.004	0.45	234	0.93	105.07	7.75	Right	0.035	0.89	0.29	7.37	MW N
TO-5111RS	0.366	9.30	0.436	11.07	1.3	33.02	0.34	8.64	0.0037	0.42	218	0.81	91.51	7.75	Right	0.035	0.89	0.29	7.37	SST N
TO-1041	0.37	9.40	0.64	16.26	1	25.40	1.11	28.19	0.7287	82.37	42	31	3502.38	6.5	Right	0.135	3.43	0.31	7.87	SST N
TO-1119	0.37	9.40	0.64	16.26	1	25.40	1.11	28.19	0.7287	82.37	42	31	3502.38	6.5	Left	0.135	3.43	0.31	7.87	SST N
TO-1035	0.375	9.53	0.427	10.85	0.63	16.00	0.18	4.57	0.0016	0.18	249	0.41	46.32	5.375	Right	0.026	0.66	0.28	7.11	MW N
TO-1036	0.375	9.53	0.427	10.85	0.58	14.73	0.19	4.83	0.0016	0.18	254	0.41	46.32	5.5	Left	0.026	0.66	0.28	7.11	MW N
TO-1065	0.375	9.53	0.481	12.22	2	50.80	0.69	17.53	0.0132	1.49	180	2.4	271.15	10.75	Right	0.053	1.35	0.3	7.62	SPR N
TO-1000	0.375	9.53	0.499	12.67	1.9	48.26	0.16	4.06	0.1897	21.44	24	4.6	519.71	1.375	Right	0.062	1.57	0.3	7.62	MW N
TO-1029	0.375	9.53	0.515	13.08	1.8	45.72	0.56	14.22	0.0666	7.53	76	5.1	576.20	6.25	Left	0.07	1.78	0.31	7.87	HD Z
TO-5126L	0.376	9.55	0.484	12.29	2	50.80	0.31	7.87	0.0389	4.40	80	3.1	350.24	4.25	Left	0.054	1.37	0.3	7.62	MW N
TO-5126LS	0.376	9.55	0.484	12.29	2	50.80	0.31	7.87	0.0363	4.10	74	2.7	305.05	4.25	Left	0.054	1.37	0.3	7.62	SST N
TO-5126R	0.376	9.55	0.484	12.29	2	50.80	0.31	7.87	0.0389	4.40	80	3.1	350.24	4.25	Right	0.054	1.37	0.3	7.62	MW N
TO-5126RS	0.376	9.55	0.484	12.29	2	50.80	0.31	7.87	0.0363	4.10	74	2.7	305.05	4.25	Right	0.054	1.37	0.3	7.62	SST N
TO-1087	0.38	9.65	0.45	11.43	1.3	33.02	0.23	5.84	0.0052	0.59	156	0.81	91.51	5	Right	0.035	0.89	0.3	7.62	SST N
TO-5117L	0.38	9.65	0.464	11.79	2	50.80	0.58	14.73	0.005	0.57	318	1.6	180.77	11.625	Left	0.042	1.07	0.3	7.62	MW N
TO-5117R	0.38	9.65	0.464	11.79	2	50.80	0.58	14.73	0.005	0.57	318	1.6	180.77	11.625	Right	0.042	1.07	0.3	7.62	MW N
TO-5121L	0.38	9.65	0.47	11.94	2	50.80	0.62	15.75	0.0065	0.73	298	1.9	214.66	11.625	Left	0.045	1.14	0.3	7.62	MW N
TO-5121R	0.38	9.65	0.47	11.94	2	50.80	0.62	15.75	0.0065	0.73	298	1.9	214.66	11.625	Right	0.045	1.14	0.3	7.62	MW N
TO-5113L	0.381	9.68	0.451	11.46	1.3	33.02	0.23	5.84	0.0059	0.67	157	0.93	105.07	5	Left	0.035	0.89	0.3	7.62	MW N
TO-5113LS	0.381	9.68	0.451	11.46	1.3	33.02	0.23	5.84	0.0056	0.63	146	0.81	91.51	5	Left	0.035	0.89	0.3	7.62	SST N
TO-5113R	0.381	9.68	0.451	11.46	1.3	33.02	0.23	5.84	0.0059	0.67	157	0.93	105.07	5	Right	0.035	0.89	0.3	7.62	MW N
TO-5113RS	0.381	9.68	0.451	11.46	1.3	33.02	0.23	5.84	0.0056	0.63	146	0.81	91.51	5	Right	0.035	0.89	0.3	7.62	SST N
TO-5119L	0.381	9.68	0.465	11.81	2	50.80	0.41	10.41	0.0072	0.81	222									

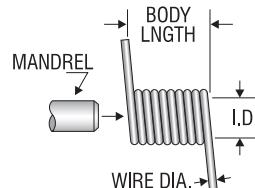

Torsion Springs

Century Stock Number	I.D. Inches mm	O.D. Inches mm	Leg Length Inches mm	Body Length Inches mm	Rate In-lbs. Deg	Sugg. Max. Defl. Deg	Sugg. Max. Load In-lbs. N-mm	No. of Coils	Wind Dir.	Wire Dia.		Sugg. Mandrel Dia. Inches mm	Mat'l	F n sh	
										Inches	mm				
TO-5125R	0.401	10.19	0.477	12.12	1.3	33.02	0.37 9.40	0.0047 0.53	251	1.2	135.58	7.75	Right	0.038 0.97	0.31 7.87 MW N
TO-5125RS	0.401	10.19	0.477	12.12	1.3	33.02	0.37 9.40	0.0044 0.50	235	1	112.98	7.75	Right	0.038 0.97	0.31 7.87 SST N
TO-5130L	0.401	10.19	0.509	12.93	2	50.80	0.53 13.46	0.0194 2.19	160	3.1	350.24	8	Left	0.054 1.37	0.32 8.13 MW N
TO-5130LS	0.401	10.19	0.509	12.93	2	50.80	0.53 13.46	0.0182 2.06	149	2.7	305.05	8	Left	0.054 1.37	0.32 8.13 SST N
TO-5130R	0.401	10.19	0.509	12.93	2	50.80	0.53 13.46	0.0194 2.19	160	3.1	350.24	8	Right	0.054 1.37	0.32 8.13 MW N
TO-5130RS	0.401	10.19	0.509	12.93	2	50.80	0.53 13.46	0.0182 2.06	149	2.7	305.05	8	Right	0.054 1.37	0.32 8.13 SST N
TO-5123L	0.402	10.21	0.472	11.99	1.3	33.02	0.4 10.16	0.0003 0.34	315	0.94	106.20	9.5	Left	0.035 0.89	0.31 7.87 MW N
TO-5123LS	0.402	10.21	0.472	11.99	1.3	33.02	0.4 10.16	0.0028 0.32	291	0.81	91.51	9.5	Left	0.035 0.89	0.31 7.87 SST N
TO-5123R	0.402	10.21	0.472	11.99	1.3	33.02	0.4 10.16	0.0003 0.34	315	0.94	106.20	9.5	Right	0.035 0.89	0.31 7.87 MW N
TO-5123RS	0.402	10.21	0.472	11.99	1.3	33.02	0.4 10.16	0.0028 0.32	291	0.81	91.51	9.5	Right	0.035 0.89	0.31 7.87 SST N
TO-5133L	0.406	10.31	0.514	13.06	2	50.80	0.76 19.30	0.013 1.47	241	3.1	350.24	11.75	Left	0.054 1.37	0.33 8.38 MW N
TO-5133LS	0.406	10.31	0.514	13.06	2	50.80	0.76 19.30	0.0121 1.37	224	2.7	305.05	11.75	Left	0.054 1.37	0.33 8.38 SST N
TO-5133R	0.406	10.31	0.514	13.06	2	50.80	0.76 19.30	0.013 1.47	241	3.1	350.24	11.75	Right	0.054 1.37	0.33 8.38 MW N
TO-5133RS	0.406	10.31	0.514	13.06	2	50.80	0.76 19.30	0.0121 1.37	224	2.7	305.05	11.75	Right	0.054 1.37	0.33 8.38 SST N
TO-1021	0.406	10.31	0.53	13.46	0.95	24.13	0.4 10.16	0.05 5.65	76	3.8	429.32	4.875	Right	0.062 1.57	0.33 8.38 HD N
TO-1091	0.408	10.36	0.526	13.36	2	50.80	0.58 14.73	0.0234 2.65	151	3.5	395.43	8	Right	0.059 1.50	0.33 8.38 SST N
TO-1103	0.408	10.36	0.526	13.36	2	50.80	0.58 14.73	0.0234 2.65	151	3.5	395.43	8	Left	0.059 1.50	0.33 8.38 SST N
TO-5135L	0.408	10.36	0.526	13.36	2	50.80	0.58 14.73	0.025 2.83	162	4	451.92	8	Left	0.059 1.50	0.33 8.38 MW N
TO-5135LS	0.408	10.36	0.526	13.36	2	50.80	0.58 14.73	0.0233 2.63	151	3.5	395.43	8	Left	0.059 1.50	0.33 8.38 SST N
TO-5135R	0.408	10.36	0.526	13.36	2	50.80	0.58 14.73	0.025 2.83	162	4	451.92	8	Right	0.059 1.50	0.33 8.38 MW N
TO-5135RS	0.408	10.36	0.526	13.36	2	50.80	0.58 14.73	0.0233 2.63	151	3.5	395.43	8	Right	0.059 1.50	0.33 8.38 SST N
TO-1109	0.408	10.36	0.544	13.82	0.3	7.62	0.23 5.84	0.1631 18.44	30	4.9	553.60	2.125	Left	0.068 1.73	0.33 8.38 HD N
TO-5127L	0.411	10.44	0.487	12.37	1.3	33.02	0.25 6.35	0.0071 0.80	168	1.2	135.58	5	Left	0.038 0.97	0.32 8.13 MW N
TO-5127LS	0.411	10.44	0.487	12.37	1.3	33.02	0.25 6.35	0.0066 0.75	157	1	112.98	5	Left	0.038 0.97	0.32 8.13 SST N
TO-5127R	0.411	10.44	0.487	12.37	1.3	33.02	0.25 6.35	0.0071 0.80	168	1.2	135.58	5	Right	0.038 0.97	0.32 8.13 MW N
TO-5127RS	0.411	10.44	0.487	12.37	1.3	33.02	0.25 6.35	0.0066 0.75	157	1	112.98	5	Right	0.038 0.97	0.32 8.13 SST N
TO-5136L	0.419	10.64	0.537	13.64	2	50.80	0.83 21.08	0.0167 1.89	243	4.1	463.22	11.75	Left	0.059 1.50	0.34 8.64 MW N
TO-5136LS	0.419	10.64	0.537	13.64	2	50.80	0.83 21.08	0.0156 1.76	227	3.5	395.43	11.75	Left	0.059 1.50	0.34 8.64 SST N
TO-5136R	0.419	10.64	0.537	13.64	2	50.80	0.83 21.08	0.0167 1.89	243	4.1	463.22	11.75	Right	0.059 1.50	0.34 8.64 MW N
TO-5136RS	0.419	10.64	0.537	13.64	2	50.80	0.83 21.08	0.0156 1.76	227	3.5	395.43	11.75	Right	0.059 1.50	0.34 8.64 SST N
TO-1020	0.421	10.69	0.491	12.47	0.6	15.24	0.46 11.68	0.0023 0.26	403	0.94	106.20	10.875	Left	0.035 0.89	0.32 8.13 MW N
TO-5129L	0.428	10.87	0.508	12.90	2	50.80	0.51 12.95	0.0042 0.47	335	1.4	158.17	10.5	Left	0.04 1.02	0.33 8.38 MW N
TO-5129LS	0.428	10.87	0.508	12.90	2	50.80	0.51 12.95	0.0039 0.44	313	1.2	135.58	10.5	Left	0.04 1.02	0.34 8.64 SST N
TO-5129R	0.428	10.87	0.508	12.90	2	50.80	0.51 12.95	0.0042 0.47	335	1.4	158.17	10.5	Right	0.04 1.02	0.33 8.38 MW N
TO-5129RS	0.428	10.87	0.508	12.90	2	50.80	0.51 12.95	0.0039 0.44	313	1.2	135.58	10.5	Right	0.04 1.02	0.34 8.64 SST N
TO-5131L	0.432	10.97	0.512	13.00	2	50.80	0.39 9.91	0.0056 0.63	250	1.4	158.17	7.75	Left	0.04 1.02	0.34 8.64 MW N
TO-5131LS	0.432	10.97	0.512	13.00	2	50.80	0.39 9.91	0.0051 0.58	236	1.2	135.58	7.75	Left	0.04 1.02	0.34 8.64 SST N
TO-5131R	0.432	10.97	0.512	13.00	2	50.80	0.39 9.91	0.0056 0.63	250	1.4	158.17	7.75	Right	0.04 1.02	0.34 8.64 MW N
TO-5131RS	0.432	10.97	0.512	13.00	2	50.80	0.39 9.91	0.0051 0.58	236	1.2	135.58	7.75	Right	0.04 1.02	0.34 8.64 SST N
TO-1104	0.434	11.02	0.56	14.22	2	50.80	0.43 10.92	0.0435 4.92	99	4.3	485.81	5.25	Left	0.0625 1.59	0.35 8.89 SST N
TO-5145RS	0.434	11.02	0.56	14.22	2	50.80	0.36 9.14	0.0571 6.45	75	4.3	485.81	4.25	Right	0.0625 1.59	0.35 8.89 SST N
TO-5145L	0.434	11.02	0.56	14.22	2	50.80	0.36 9.14	0.0611 6.91	80	4.9	553.60	4.25	Left	0.063 1.60	0.35 8.89 MW N
TO-5145LS	0.434	11.02	0.56	14.22	2	50.80	0.36 9.14	0.0571 6.45	75	4.3	485.81	4.25	Left	0.0625 1.59	0.35 8.89 SST N
TO-5145R	0.434	11.02	0.56	14.22	2	50.80	0.36 9.14	0.0611 6.91	80	4.9	553.60	4.25	Right	0.063 1.60	0.35 8.89 MW N
TO-1051	0.437	11.10	0.491	12.47	0.83	21.08	0.06 1.52	0.0088 0.99	52	0.46	51.97	1	Left	0.027 0.69	0.32 8.13 MW N
TO-1009	0.437	11.10	0.511	12.98	0.9	22.86	0.61 15.49	0.0202 0.25	501	1.1	124.28	13.875	Right	0.037 0.94	0.34 8.64 MW N
TO-1028	0.437	11.10	0.535	13.59	0.68	17.27	0.13 3.30	0.0666 7.53	38	2.5	282.45	1.375	Left	0.049 1.24	0.35 8.89 MW N
TO-5132L	0.438	11.13	0.514	13.06	1.3	33.02	0.44 11.18	0.0036 0.41	337	1.2	135.58	9.5	Left	0.038 0.97	0.34 8.64 MW N
TO-5132LS	0.438	11.13	0.514	13.06	1.3	33.02	0.44 11.18	0.0033 0.37	313	1	112.98	9.5	Left	0.038 0.97	0.34 8.64 SST N
TO-5132R	0.438	11.13	0.514	13.06	1.3	33.02	0.44 11.18	0.0036 0.41	337	1.2	135.58	9.5	Right	0.038 0.97	0.34 8.64 MW N
TO-5132RS	0.438	11.13	0.514	13.06	1.3	33.02	0.44 11.18	0.0033 0.37	313	1	112.98	9.5	Right	0.038 0.97	0.34 8.64 SST N
TO-5134L	0.439	11.15	0.519	13.18	2	50.80	0.26 6.60	0.0083 0.94	167	1.4	158.17	5	Left	0.04 1.02	0.34 8.64 MW N
TO-5134LS	0.439	11.15	0.519	13.18	2	50.80	0.26 6.60	0.0077 0.87	157	1.2	135.58	5	Left	0.04 1.02	0.34 8.64 SST N
TO-5134R	0.439	11.15	0.519	13.18	2	50.80	0.26 6.60	0.0083 0.94	167	1.4	158.17	5	Right	0.04 1.02	0.34 8.64 MW N
TO-5134RS	0.439	11.15	0.519	13.18	2	50.80	0.26 6.60	0.0077 0.87	157	1.2	135.58	5	Right	0.04 1.02	0.34 8.64 SST N
TO-5154L	0.449	11.40	0.575	14.61	2	50.80	0.49 12.45	0.0378 4.27	130	4.9	553.60	6.125	Left	0.063 1.60	0.36 9.14 MW N
TO-5154R	0.449	11.40	0.575	14.61	2	50.80	0.49 12.45	0.0378 4.27	130	4.9	553.60	6.125	Right	0.063 1.60	0.36 9.14 MW N
TO-5149L	0.451	11.46	0.569	14.45	2	50.80	0.71 18.03	0.0187 2.11	218	4.1	463.22	9.875	Left	0.059 1.50	0.36 9.14 MW N
TO-5149R	0.451	11.46	0.569	14.45	2	50.80	0.71 18.03</								




Century Spring

Torsion Springs


Torsion Springs

Century Stock Number	I.D.		O.D.		Leg Length Inches mm	Body Length Inches mm	Rate		Sugg. Max. Defl. Deg	Sugg. Max. Load In-Lbs. N-mm	No. of Coils	Wind Dir.	Wire Dia.		Sugg. Mandrel Dia.		Mat'l	F n sh	
	Inches	mm	Inches	mm			In-Lbs. Deg	N-mm Deg					Inches	mm	Inches	mm			
TO-5142LS	0.454	11.53	0.556	14.12	2	50.80	0.39	9.91	0.0161	1.82	144	2.3	259.85	6	Left	0.051	1.30	0.36	9.14 SST N
TO-5142R	0.454	11.53	0.556	14.12	2	50.80	0.39	9.91	0.0172	1.94	155	2.7	305.05	6	Right	0.051	1.30	0.36	9.14 MW N
TO-5142RS	0.454	11.53	0.556	14.12	2	50.80	0.39	9.91	0.0161	1.82	144	2.3	259.85	6	Right	0.051	1.30	0.36	9.14 SST N
TO-5146L	0.454	11.53	0.564	14.33	2	50.80	0.37	9.40	0.0263	2.97	126	3.3	372.83	5.125	Left	0.055	1.40	0.36	9.14 MW N
TO-5146R	0.454	11.53	0.564	14.33	2	50.80	0.37	9.40	0.0263	2.97	126	3.3	372.83	5.125	Right	0.055	1.40	0.36	9.14 MW N
TO-5147L	0.454	11.53	0.564	14.33	2	50.80	0.6	15.24	0.0158	1.79	211	3.3	372.83	8.875	Left	0.055	1.40	0.36	9.14 MW N
TO-5147R	0.454	11.53	0.564	14.33	2	50.80	0.6	15.24	0.0158	1.79	211	3.3	372.83	8.875	Right	0.055	1.40	0.36	9.14 MW N
TO-5148L	0.454	11.53	0.564	14.33	2	50.80	0.82	20.83	0.0113	1.28	295	3.3	372.83	12.625	Left	0.055	1.40	0.36	9.14 MW N
TO-5148R	0.454	11.53	0.564	14.33	2	50.80	0.82	20.83	0.0113	1.28	295	3.3	372.83	12.625	Right	0.055	1.40	0.36	9.14 MW N
TO-5152L	0.454	11.53	0.572	14.53	2	50.80	0.4	10.16	0.0346	3.91	118	4.1	463.22	5.125	Left	0.059	1.50	0.36	9.14 MW N
TO-5152R	0.454	11.53	0.572	14.53	2	50.80	0.4	10.16	0.0346	3.91	118	4.1	463.22	5.125	Right	0.059	1.50	0.36	9.14 MW N
TO-5141L	0.458	11.63	0.556	14.12	2	50.80	0.48	12.19	0.0112	1.27	225	2.5	282.45	7.875	Left	0.049	1.24	0.36	9.14 MW N
TO-5141R	0.458	11.63	0.556	14.12	2	50.80	0.48	12.19	0.0112	1.27	225	2.5	282.45	7.875	Right	0.049	1.24	0.36	9.14 MW N
TO-5138L	0.459	11.66	0.549	13.94	2	50.80	0.57	14.48	0.006	0.68	330	2	225.96	10.5	Left	0.045	1.14	0.36	9.14 MW N
TO-5138LS	0.459	11.66	0.549	13.94	2	50.80	0.57	14.48	0.0056	0.68	308	1.7	192.07	10.5	Left	0.045	1.14	0.36	9.14 SST N
TO-5138R	0.459	11.66	0.549	13.94	2	50.80	0.57	14.48	0.006	0.68	330	2	225.96	10.5	Right	0.045	1.14	0.36	9.14 MW N
TO-5138RS	0.459	11.66	0.549	13.94	2	50.80	0.57	14.48	0.0056	0.68	308	1.7	192.07	10.5	Right	0.045	1.14	0.36	9.14 SST N
TO-5143L	0.46	11.68	0.558	14.17	2	50.80	0.63	16.00	0.0085	0.96	299	2.5	282.45	10.625	Left	0.049	1.24	0.36	9.14 MW N
TO-5143R	0.46	11.68	0.558	14.17	2	50.80	0.63	16.00	0.0085	0.96	299	2.5	282.45	10.625	Right	0.049	1.24	0.36	9.14 MW N
TO-5144L	0.461	11.71	0.559	14.20	2	50.80	0.28	7.11	0.0204	2.31	124	2.5	282.45	4.125	Left	0.049	1.24	0.36	9.14 MW N
TO-5144R	0.461	11.71	0.559	14.20	2	50.80	0.28	7.11	0.0204	2.31	124	2.5	282.45	4.125	Right	0.049	1.24	0.36	9.14 MW N
TO-5157L	0.465	11.81	0.591	15.01	2	50.80	0.62	15.75	0.0306	3.46	162	4.9	553.60	8	Left	0.063	1.60	0.37	9.40 MW N
TO-5157LS	0.465	11.81	0.591	15.01	2	50.80	0.62	15.75	0.0286	3.23	151	4.3	485.81	8	Left	0.0625	1.59	0.38	9.65 SST N
TO-5157R	0.465	11.81	0.591	15.01	2	50.80	0.62	15.75	0.0306	3.46	162	4.9	553.60	8	Right	0.063	1.60	0.37	9.40 MW N
TO-5157RS	0.465	11.81	0.591	15.01	2	50.80	0.62	15.75	0.0286	3.23	151	4.3	485.81	8	Right	0.0625	1.59	0.38	9.65 SST N
TO-5140L	0.466	11.84	0.556	14.12	2	50.80	0.43	10.92	0.008	0.90	248	2	225.96	7.75	Left	0.045	1.14	0.36	9.14 MW N
TO-5140LS	0.466	11.84	0.556	14.12	2	50.80	0.43	10.92	0.0074	0.84	232	1.7	192.07	7.75	Left	0.045	1.14	0.37	9.40 SST N
TO-5140R	0.466	11.84	0.556	14.12	2	50.80	0.43	10.92	0.008	0.90	248	2	225.96	7.75	Right	0.045	1.14	0.36	9.14 MW N
TO-5140RS	0.466	11.84	0.556	14.12	2	50.80	0.43	10.92	0.0074	0.84	232	1.7	192.07	7.75	Right	0.045	1.14	0.37	9.40 SST N
TO-1037	0.468	11.89	0.568	14.43	0.61	15.49	0.52	13.21	0.011	1.24	230	2.5	282.45	8.5	Left	0.05	1.27	0.37	9.40 MW N
TO-1110	0.468	11.89	0.612	15.54	1.3	33.02	0.26	6.60	0.1707	19.30	33	5.6	632.69	2.25	Left	0.072	1.83	0.38	9.65 HD N
TO-5151L	0.469	11.91	0.571	14.50	2	50.80	0.55	13.97	0.0115	1.30	233	2.7	305.05	8.75	Left	0.051	1.30	0.37	9.40 MW N
TO-5151LS	0.469	11.91	0.571	14.50	2	50.80	0.55	13.97	0.0107	1.21	217	2.3	259.85	8.75	Left	0.051	1.30	0.37	9.40 SST N
TO-5151R	0.469	11.91	0.571	14.50	2	50.80	0.55	13.97	0.0115	1.30	233	2.7	305.05	8.75	Right	0.051	1.30	0.37	9.40 MW N
TO-5151RS	0.469	11.91	0.571	14.50	2	50.80	0.55	13.97	0.0107	1.21	217	2.3	259.85	8.75	Right	0.051	1.30	0.37	9.40 SST N
TO-5137L	0.471	11.96	0.547	13.89	1.3	33.02	0.17	4.32	0.0101	1.14	119	1.2	135.58	3.125	Left	0.038	0.97	0.36	9.14 MW N
TO-5137R	0.471	11.96	0.547	13.89	1.3	33.02	0.17	4.32	0.0101	1.14	119	1.2	135.58	3.125	Right	0.038	0.97	0.36	9.14 MW N
TO-5139L	0.472	11.99	0.552	14.02	1.3	33.02	0.18	4.57	0.0123	1.39	113	1.4	158.17	3.125	Left	0.04	1.02	0.36	9.14 MW N
TO-5139R	0.472	11.99	0.552	14.02	1.3	33.02	0.18	4.57	0.0123	1.39	113	1.4	158.17	3.125	Right	0.04	1.02	0.36	9.14 MW N
TO-5160L	0.474	12.04	0.6	15.24	2	50.80	0.88	22.35	0.0204	2.31	243	5	564.90	11.75	Left	0.063	1.60	0.38	9.65 MW N
TO-5160LS	0.474	12.04	0.6	15.24	2	50.80	0.88	22.35	0.019	2.15	227	4.3	485.81	11.75	Left	0.0625	1.59	0.38	9.65 SST N
TO-5160R	0.474	12.04	0.6	15.24	2	50.80	0.88	22.35	0.0204	2.31	243	5	564.90	11.75	Right	0.063	1.60	0.38	9.65 MW N
TO-5160RS	0.474	12.04	0.6	15.24	2	50.80	0.88	22.35	0.019	2.15	227	4.3	485.81	11.75	Right	0.0625	1.59	0.38	9.65 SST N
TO-1059	0.484	12.29	0.512	13.00	1.3	33.02	0.04	1.02	0.0003	0.03	205	0.61	6.89	1.875	Left	0.014	0.36	0.32	8.13 SST N
TO-5153L	0.485	12.32	0.575	14.61	2	50.80	0.3	7.62	0.0119	1.35	166	2	225.96	5	Left	0.045	1.14	0.38	9.65 MW N
TO-5153LS	0.485	12.32	0.575	14.61	2	50.80	0.3	7.62	0.0111	1.25	155	1.7	192.07	5	Left	0.045	1.14	0.38	9.65 SST N
TO-5153R	0.485	12.32	0.575	14.61	2	50.80	0.3	7.62	0.0119	1.35	166	2	225.96	5	Right	0.045	1.14	0.38	9.65 MW N
TO-5153RS	0.485	12.32	0.575	14.61	2	50.80	0.3	7.62	0.0111	1.25	155	1.7	192.07	5	Right	0.045	1.14	0.38	9.65 SST N
TO-5163L	0.485	12.32	0.625	15.88	2	50.80	0.69	17.53	0.0417	4.71	155	6.5	734.37	8	Left	0.07	1.78	0.39	9.91 MW N
TO-5163LS	0.485	12.32	0.625	15.88	2	50.80	0.69	17.53	0.0389	4.40	143	5.6	632.69	8	Left	0.07	1.78	0.39	9.91 SST N
TO-5163R	0.485	12.32	0.625	15.88	2	50.80	0.69	17.53	0.0417	4.71	155	6.5	734.37	8	Right	0.07	1.78	0.39	9.91 MW N
TO-5163RS	0.485	12.32	0.625	15.88	2	50.80	0.69	17.53	0.0389	4.40	143	5.6	632.69	8	Right	0.07	1.78	0.39	9.91 SST N
TO-5165L	0.487	12.37	0.637	16.18	2	50.80	0.43	10.92	0.1022	11.55	77	7.9	892.54	4.25	Left	0.075	1.91	0.39	9.91 MW N
TO-5165LS	0.487	12.37	0.637	16.18	2	50.80	0.43	10.92	0.0963</td										

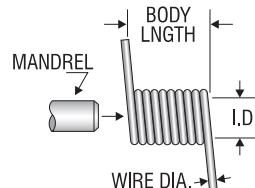

Torsion Springs


Century Stock Number	I.D. Inches mm	O.D. Inches mm	Leg Length Inches mm	Body Length Inches mm	Rate In-lbs. Deg	Sugg. Max. Defl. Deg	Sugg. Max. Load In-lbs. N-mm	No. of Coils	Wind Dir.	Wire Dia.		Sugg. Mandrel Dia. Inches mm	Mat'l	F n sh	
										Inches	mm				
TO-5170L	0.522	13.26	0.672	17.07	2	50.80	0.74	18.80	0.0511	5.78	155	7.9	892.54	8	Left 0.075 1.91 0.42 10.67 MW N
TO-5170LS	0.522	13.26	0.672	17.07	2	50.80	0.74	18.80	0.0482	5.45	142	6.8	768.26	8	Left 0.075 1.91 0.42 10.67 SST N
TO-5170R	0.522	13.26	0.672	17.07	2	50.80	0.74	18.80	0.0511	5.78	155	7.9	892.54	8	Right 0.075 1.91 0.42 10.67 MW N
TO-5170RS	0.522	13.26	0.672	17.07	2	50.80	0.74	18.80	0.0482	5.45	142	6.8	768.26	8	Right 0.075 1.91 0.42 10.67 SST N
TO-1092	0.522	13.26	0.678	17.22	2	50.80	0.54	13.72	0.0846	9.56	91	7.7	869.95	5.25	Right 0.078 1.98 0.42 10.67 SST
TO-5162LS	0.523	13.28	0.619	15.72	2	50.80	0.32	8.13	0.0141	1.59	149	2.1	237.26	5	Left 0.0475 1.21 0.41 10.41 SST N
TO-5162RS	0.523	13.28	0.619	15.72	2	50.80	0.32	8.13	0.0141	1.59	149	2.1	237.26	5	Right 0.0475 1.21 0.41 10.41 SST N
TO-5162L	0.523	13.28	0.619	15.72	2	50.80	0.32	8.13	0.0153	1.73	157	2.4	271.15	5	Left 0.048 1.22 0.41 10.41 MW N
TO-5162R	0.523	13.28	0.619	15.72	2	50.80	0.32	8.13	0.0153	1.73	157	2.4	271.15	5	Right 0.048 1.22 0.41 10.41 MW N
TO-5164LS	0.526	13.36	0.628	15.95	2	50.80	0.65	16.51	0.0081	0.92	291	2.3	259.85	10.5	Left 0.051 1.30 0.42 10.67 SST N
TO-5164L	0.526	13.36	0.628	15.95	2	50.80	0.65	16.51	0.0086	0.97	313	2.7	305.05	10.5	Left 0.051 1.30 0.41 10.41 MW N
TO-5164R	0.526	13.36	0.628	15.95	2	50.80	0.65	16.51	0.0086	0.97	313	2.7	305.05	10.5	Right 0.051 1.30 0.41 10.41 MW N
TO-5164RS	0.526	13.36	0.628	15.95	2	50.80	0.65	16.51	0.0081	0.92	291	2.3	259.85	10.5	Right 0.051 1.30 0.42 10.67 SST N
TO-1039	0.531	13.49	0.653	16.59	1.2	30.48	0.47	11.94	0.0281	3.18	141	4	451.92	6	Right 0.061 1.55 0.42 10.67 SST N
TO-1050	0.531	13.49	0.655	16.64	1.3	33.02	0.48	12.19	0.0299	3.38	139	4.2	474.52	6	Left 0.0625 1.59 0.42 10.67 SST N
TO-1016	0.532	13.51	0.612	15.54	1.1	27.94	0.19	4.83	0.0106	1.20	132	1.4	158.17	3.25	Left 0.04 1.02 0.41 10.41 MW N
TO-1129	0.532	13.51	0.658	16.71	2	50.80	0.66	16.76	0.0224	2.53	194	4.4	497.11	8.5	Left 0.0625 1.59 0.43 10.92 SST N
TO-5172L	0.535	13.59	0.685	17.40	2	50.80	1.05	26.67	0.0341	3.85	234	8	903.84	11.75	Left 0.075 1.91 0.43 10.92 MW N
TO-5172LS	0.535	13.59	0.685	17.40	2	50.80	1.05	26.67	0.0321	3.63	214	6.9	779.56	11.75	Left 0.075 1.91 0.43 10.92 SST N
TO-5172R	0.535	13.59	0.685	17.40	2	50.80	1.05	26.67	0.0341	3.85	234	8	903.84	11.75	Right 0.075 1.91 0.43 10.92 MW N
TO-5172RS	0.535	13.59	0.685	17.40	2	50.80	1.05	26.67	0.0321	3.63	214	6.9	779.56	11.75	Right 0.075 1.91 0.43 10.92 SST N
TO-5173L	0.537	13.64	0.693	17.60	2	50.80	0.77	19.56	0.0581	6.57	154	8.9	1005.52	8	Left 0.078 1.98 0.43 10.92 MW N
TO-5173LS	0.537	13.64	0.693	17.60	2	50.80	0.77	19.56	0.0542	6.13	142	7.7	869.95	8	Left 0.078 1.98 0.44 11.18 SST N
TO-5173R	0.537	13.64	0.693	17.60	2	50.80	0.77	19.56	0.0581	6.57	154	8.9	1005.52	8	Right 0.078 1.98 0.43 10.92 MW N
TO-5173RS	0.537	13.64	0.693	17.60	2	50.80	0.77	19.56	0.0542	6.13	142	7.7	869.95	8	Right 0.078 1.98 0.44 11.18 SST N
TO-5167L	0.546	13.87	0.654	16.61	2	50.80	0.42	10.67	0.0194	2.19	164	3.2	361.54	6	Left 0.054 1.37 0.43 10.92 MW N
TO-5167LS	0.546	13.87	0.654	16.61	2	50.80	0.42	10.67	0.0182	2.06	153	2.8	316.34	6	Left 0.054 1.37 0.43 10.92 SST N
TO-5167R	0.546	13.87	0.654	16.61	2	50.80	0.42	10.67	0.0194	2.19	164	3.2	361.54	6	Right 0.054 1.37 0.43 10.92 MW N
TO-5167RS	0.546	13.87	0.654	16.61	2	50.80	0.42	10.67	0.0182	2.06	153	2.8	316.34	6	Right 0.054 1.37 0.43 10.92 SST N
TO-5176L	0.55	13.97	0.706	17.93	2	50.80	1.09	27.69	0.0387	4.37	231	8.9	1005.52	11.75	Left 0.078 1.98 0.44 11.18 MW N
TO-5176LS	0.55	13.97	0.706	17.93	2	50.80	1.09	27.69	0.0361	4.08	213	7.7	869.95	11.75	Left 0.078 1.98 0.45 11.43 SST N
TO-5176R	0.55	13.97	0.706	17.93	2	50.80	1.09	27.69	0.0387	4.37	231	8.9	1005.52	11.75	Right 0.078 1.98 0.44 11.18 MW N
TO-5176RS	0.55	13.97	0.706	17.93	2	50.80	1.09	27.69	0.0361	4.08	213	7.7	869.95	11.75	Right 0.078 1.98 0.45 11.43 SST N
TO-5169L	0.556	14.12	0.664	16.87	2	50.80	0.58	14.73	0.013	1.47	247	3.2	361.54	8.75	Left 0.054 1.37 0.44 11.18 MW N
TO-5169LS	0.556	14.12	0.664	16.87	2	50.80	0.58	14.73	0.0121	1.37	230	2.8	316.34	8.75	Left 0.054 1.37 0.44 11.18 SST N
TO-5169R	0.556	14.12	0.664	16.87	2	50.80	0.58	14.73	0.013	1.47	247	3.2	361.54	8.75	Right 0.054 1.37 0.44 11.18 MW N
TO-5169RS	0.556	14.12	0.664	16.87	2	50.80	0.58	14.73	0.0121	1.37	230	2.8	316.34	8.75	Right 0.054 1.37 0.44 11.18 SST N
TO-1007	0.562	14.27	0.62	15.75	1.4	35.56	0.12	3.05	0.0032	0.36	178	0.57	64.40	2.875	Left 0.029 0.74 0.41 10.41 MW N
TO-1046	0.562	14.27	0.686	17.42	1.6	40.64	0.48	12.19	0.0284	3.21	147	4.2	474.52	6	Right 0.0625 1.59 0.45 11.43 SST N
TO-1047	0.562	14.27	0.686	17.42	1.7	43.18	0.48	12.19	0.0284	3.21	147	4.2	474.52	6	Left 0.0625 1.59 0.45 11.43 SST N
TO-1111	0.562	14.27	0.688	17.48	0.5	12.70	0.49	12.45	0.0303	3.43	145	4.4	497.11	6	Right 0.0625 1.59 0.45 11.43 SST N
TO-1108	0.562	14.27	0.706	17.93	0.22	5.59	0.26	6.60	0.1402	15.85	41	5.7	643.99	2.333	Left 0.072 1.83 0.46 11.68 HD BO
TO-1030	0.562	14.27	0.712	18.08	1.5	38.10	0.53	13.46	0.0713	8.06	112	8	903.84	5.375	Right 0.075 1.91 0.45 11.43 MW Z
TO-1123	0.562	14.27	0.772	19.61	3.5	88.90	1.04	26.42	0.1641	18.55	i	17	1920.66	8	Left 0.105 2.67 0.46 11.68 SST N
TO-5171L	0.563	14.30	0.681	17.30	2	50.80	0.45	11.43	0.025	2.83	166	4.1	463.22	6	Left 0.059 1.50 0.44 11.18 MW N
TO-5171LS	0.563	14.30	0.681	17.30	2	50.80	0.45	11.43	0.0233	2.63	155	3.6	406.73	6	Left 0.059 1.50 0.45 11.43 SST N
TO-5171R	0.563	14.30	0.681	17.30	2	50.80	0.45	11.43	0.025	2.83	166	4.1	463.22	6	Right 0.059 1.50 0.44 11.18 MW N
TO-5171RS	0.563	14.30	0.681	17.30	2	50.80	0.45	11.43	0.0233	2.63	155	3.6	406.73	6	Right 0.059 1.50 0.45 11.43 SST N
TO-5178L	0.578	14.68	0.748	19.00	2.5	63.50	0.49	12.45	0.1429	16.15	81	12	1355.76	4.25	Left 0.085 2.16 0.47 11.94 MW N
TO-5178LS	0.578	14.68	0.748	19.00	2.5	63.50	0.49	12.45	0.1333	15.07	75	9.9	1118.50	4.25	Left 0.085 2.16 0.47 11.94 SST N
TO-5178R	0.578	14.68	0.748	19.00	2.5	63.50	0.49	12.45	0.1429	16.15	81	12	1355.76	4.25	Right 0.085 2.16 0.47 11.94 MW N
TO-5178RS	0.578	14.68	0.748	19.00	2.5	63.50	0.49	12.45	0.1333	15.07	75	9.9	1118.50	4.25	Right 0.085 2.16 0.47 11.94 SST N
TO-5175L	0.581	14.76	0.699	17.75	2	50.80	0.63	16.00	0.0167	1.89	249	4.2	474.52	8.75	Left 0.059 1.50 0.46 11.68 MW N
TO-5175LS	0.581	14.76	0.699	17.75	2	50.80	0.63	16.00	0.0156	1.76	232	3.6	406.73	8.75	Left 0.059 1.50 0.46 11.68 SST N
TO-5175R	0.581	14.76	0.699	17.75	2	50.80	0.63	16.00	0.0167	1.89	249	4.2	474.52	8.75	Right 0.059 1.50 0.46 11.68 MW N
TO-5175RS	0.581	14.76	0.699	17.75	2	50.80	0.63	16.00	0.0156	1.76	232	3.6	406.73	8.75	Right 0.059 1.50 0.46 11.68 SST N
TO-5174L	0.586	14.88	0.694	17.63	2	50.80	0.74	18.80	0.0097	1.10	330	3.2	361.54	11.5	Left 0.054 1.37 0.46 11.68 MW N
TO-5174LS	0.586	14.88	0.694	17.63	2	50.80	0.74	18.80	0.0091	1.03	308	2.8	316.34	11.5	Left 0.054 1.37 0.46 11.68 SST N
TO-5174R	0.586														



Century Spring


Torsion Springs

Century Stock Number	I.D.		O.D.		Leg Length Inches mm	Body Length Inches mm	Rate		Sugg. Max. Defl. Deg	Sugg. Max. Load In-Lbs. N-mm	No. of Coils	Wind Dir.	Wire Dia.		Sugg. Mandrel Dia.		F n sh			
	Inches	mm	Inches	mm			In-Lbs. Deg	N-mm Deg					Inches	mm	Inches	mm	Mat'l			
TO-5181R	0.606	15.39	0.75	19.05	2	50.80	1.08	27.43	0.0251	2.84	285	7.1	802.16	12.625	Right	0.072	1.83	0.48	12.19	MW N
TO-5182L	0.607	15.42	0.757	19.23	2	50.80	0.66	16.76	0.0511	5.78	157	8	903.84	7	Left	0.075	1.91	0.49	12.45	MW N
TO-5182LS	0.607	15.42	0.757	19.23	2	50.80	0.66	16.76	0.0482	5.45	144	6.9	779.56	7	Left	0.075	1.91	0.49	12.45	SST N
TO-5182R	0.607	15.42	0.757	19.23	2	50.80	0.66	16.76	0.0511	5.78	157	8	903.84	7	Right	0.075	1.91	0.49	12.45	MW N
TO-5182RS	0.607	15.42	0.757	19.23	2	50.80	0.66	16.76	0.0482	5.45	144	6.9	779.56	7	Right	0.075	1.91	0.49	12.45	SST N
TO-5189LS	0.62	15.75	0.79	20.07	2.5	63.50	0.84	21.34	0.0667	7.54	150	10	1129.80	8	Left	0.085	2.16	0.5	12.70	SST N
TO-5189RS	0.62	15.75	0.79	20.07	2.5	63.50	0.84	21.34	0.0667	7.54	150	10	1129.80	8	Right	0.085	2.16	0.5	12.70	SST N
TO-5189L	0.62	15.75	0.79	20.07	2.5	63.50	0.84	21.34	0.0714	8.07	162	12	1355.76	8	Left	0.085	2.16	0.5	12.70	MW N
TO-5189R	0.62	15.75	0.79	20.07	2.5	63.50	0.84	21.34	0.0714	8.07	162	12	1355.76	8	Right	0.085	2.16	0.5	12.70	MW N
TO-1015	0.625	15.88	0.763	19.38	1.3	33.02	0.5	12.70	0.0448	5.06	148	6.6	745.67	5.625	Right	0.069	1.75	0.5	12.70	MW Z
TO-5187LS	0.625	15.88	0.781	19.84	2	50.80	0.69	17.53	0.0542	6.13	144	7.8	881.24	7	Left	0.078	1.98	0.5	12.70	SST N
TO-5187L	0.625	15.88	0.781	19.84	2	50.80	0.69	17.53	0.0581	6.57	156	9	1016.82	7	Left	0.078	1.98	0.5	12.70	MW N
TO-5187R	0.625	15.88	0.781	19.84	2	50.80	0.69	17.53	0.0581	6.57	156	9	1016.82	7	Right	0.078	1.98	0.5	12.70	MW N
TO-5187RS	0.625	15.88	0.781	19.84	2	50.80	0.69	17.53	0.0542	6.13	144	7.8	881.24	7	Right	0.078	1.98	0.5	12.70	SST N
TO-5191L	0.635	16.13	0.805	20.45	2.5	63.50	1.19	30.23	0.0476	5.38	244	12	1355.76	11.75	Left	0.085	2.16	0.51	12.95	MW N
TO-5191LS	0.635	16.13	0.805	20.45	2.5	63.50	1.19	30.23	0.0444	5.02	226	10	1129.80	11.75	Left	0.085	2.16	0.51	12.95	SST N
TO-5191R	0.635	16.13	0.805	20.45	2.5	63.50	1.19	30.23	0.0476	5.38	244	12	1355.76	11.75	Right	0.085	2.16	0.51	12.95	MW N
TO-5191RS	0.635	16.13	0.805	20.45	2.5	63.50	1.19	30.23	0.0444	5.02	226	10	1129.80	11.75	Right	0.085	2.16	0.51	12.95	SST N
TO-5197RS	0.638	16.21	0.848	21.54	3.5	88.90	0.72	18.29	0.2333	26.37	75	18	2033.64	5.25	Right	0.105	2.67	0.52	13.21	SST N
TO-5197LS	0.638	16.21	0.848	21.54	3.5	88.90	0.72	18.29	0.2333	26.37	75	18	2033.64	5.25	Left	0.105	2.67	0.52	13.21	SST N
TO-1105	0.641	16.28	0.767	19.48	2	50.80	0.42	10.67	0.0322	3.64	137	4.4	497.11	5	Left	0.0625	1.59	0.51	12.95	SST N
TO-5186L	0.641	16.28	0.767	19.48	2	50.80	0.49	12.45	0.0306	3.46	166	5.1	576.20	6	Left	0.063	1.60	0.51	12.95	MW N
TO-5186LS	0.641	16.28	0.767	19.48	2	50.80	0.49	12.45	0.0286	3.23	154	4.4	497.11	6	Left	0.0625	1.59	0.51	12.95	SST N
TO-5186RS	0.641	16.28	0.767	19.48	2	50.80	0.49	12.45	0.0286	3.23	154	4.4	497.11	6	Right	0.0625	1.59	0.51	12.95	SST N
TO-5186R	0.641	16.28	0.767	19.48	2	50.80	0.49	12.45	0.0306	3.46	166	5.1	576.20	6	Right	0.063	1.60	0.51	12.95	MW N
TO-1093	0.647	16.43	0.803	20.40	2	50.80	0.6	15.24	0.0613	6.93	127	7.8	881.24	6	Right	0.078	1.98	0.52	13.21	SST N
TO-5188L	0.658	16.71	0.784	19.91	2	50.80	0.68	17.27	0.0204	2.31	249	5.1	576.20	8.75	Left	0.063	1.60	0.52	13.21	MW N
TO-5188LS	0.658	16.71	0.784	19.91	2	50.80	0.68	17.27	0.019	2.15	233	4.4	497.11	8.75	Left	0.0625	1.59	0.52	13.21	SST N
TO-5188R	0.658	16.71	0.784	19.91	2	50.80	0.68	17.27	0.0204	2.31	249	5.1	576.20	8.75	Right	0.063	1.60	0.52	13.21	MW N
TO-5188RS	0.658	16.71	0.784	19.91	2	50.80	0.68	17.27	0.019	2.15	233	4.4	497.11	8.75	Right	0.0625	1.59	0.52	13.21	SST N
TO-5193L	0.66	16.76	0.81	20.57	2	50.80	0.89	22.61	0.0341	3.85	238	8.1	915.14	9.75	Left	0.075	1.91	0.53	13.46	MW N
TO-5193LS	0.66	16.76	0.81	20.57	2	50.80	0.89	22.61	0.0321	3.63	217	7	790.86	9.75	Left	0.075	1.91	0.53	13.46	SST N
TO-5193R	0.66	16.76	0.81	20.57	2	50.80	0.89	22.61	0.0341	3.85	238	8.1	915.14	9.75	Right	0.075	1.91	0.53	13.46	MW N
TO-5193RS	0.66	16.76	0.81	20.57	2	50.80	0.89	22.61	0.0321	3.63	217	7	790.86	9.75	Right	0.075	1.91	0.53	13.46	SST N
TO-5192L	0.67	17.02	0.81	20.57	2	50.80	0.54	13.72	0.0417	4.71	159	6.6	745.67	6	Left	0.07	1.78	0.53	13.46	MW N
TO-5192LS	0.67	17.02	0.81	20.57	2	50.80	0.54	13.72	0.0389	4.40	147	5.7	643.99	6	Left	0.07	1.78	0.53	13.46	SST N
TO-5192R	0.67	17.02	0.81	20.57	2	50.80	0.54	13.72	0.0417	4.71	159	6.6	745.67	6	Right	0.07	1.78	0.53	13.46	MW N
TO-5192RS	0.67	17.02	0.81	20.57	2	50.80	0.54	13.72	0.0389	4.40	147	5.7	643.99	6	Right	0.07	1.78	0.53	13.46	SST N
TO-5190L	0.672	17.07	0.798	20.27	2	50.80	0.87	22.10	0.0153	1.73	333	5.1	576.20	11.5	Left	0.063	1.60	0.53	13.46	MW N
TO-5190LS	0.672	17.07	0.798	20.27	2	50.80	0.87	22.10	0.0143	1.62	310	4.4	497.11	11.5	Left	0.0625	1.59	0.53	13.46	SST N
TO-5190R	0.672	17.07	0.798	20.27	2	50.80	0.87	22.10	0.0153	1.73	333	5.1	576.20	11.5	Right	0.063	1.60	0.53	13.46	MW N
TO-5190RS	0.672	17.07	0.798	20.27	2	50.80	0.87	22.10	0.0143	1.62	310	4.4	497.11	11.5	Right	0.0625	1.59	0.53	13.46	SST N
TO-5195L	0.679	17.25	0.835	21.21	2	50.80	0.92	23.37	0.0387	4.37	235	9.1	1028.12	9.75	Left	0.078	1.98	0.54	13.72	MW N
TO-5195LS	0.679	17.25	0.835	21.21	2	50.80	0.92	23.37	0.0361	4.08	217	7.8	881.24	9.75	Left	0.078	1.98	0.54	13.72	SST N
TO-5195R	0.679	17.25	0.835	21.21	2	50.80	0.92	23.37	0.0387	4.37	235	9.1	1028.12	9.75	Right	0.078	1.98	0.54	13.72	MW N
TO-5195RS	0.679	17.25	0.835	21.21	2	50.80	0.92	23.37	0.0361	4.08	217	7.8	881.24	9.75	Right	0.078	1.98	0.54	13.72	SST N
TO-5198L	0.679	17.25	0.869	22.07	3	76.20	1.05	26.67	0.0889	10.05	149	13	1468.74	9	Left	0.095	2.41	0.55	13.97	SST N
TO-5198RS	0.679	17.25	0.869	22.07	3	76.20	1.05	26.67	0.0889	10.05	149	13	1468.74	9	Right	0.095	2.41	0.55	13.97	SST N
TO-5200L	0.681	17.30	0.871	22.12	3	76.20	0.55	13.97	0.01904	21.52	82	16	1807.68	4.25	Left	0.095	2.41	0.55	13.97	MW N
TO-5200RS	0.681	17.30	0.871	22.12	3	76.20	0.55	13.97	0.01777	20.09	75	13	1468.74	4.25	Left	0.095	2.41	0.55	13.97	SST N
TO-5194L	0.686	17.42	0.826	20.98	2	50.80	0.75	19.05	0.0259	2.93	220	5.7	643.99	8.75	Left	0.07	1.78	0.54	13.72	SST N
TO-5194RS	0.686	17.42	0.826	20.98	2	50.80	0.75	19.05	0.0278	3.14	239	6.6	745.67	8.75	Right	0.07	1.78	0.54	13.72	MW N
TO-5194R	0.686</td																			

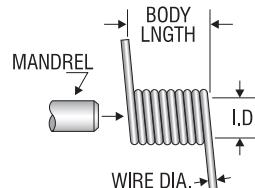

Torsion Springs

Century Stock Number	I.D. Inches mm	O.D. Inches mm	Leg Length Inches mm	Body Length Inches mm	Rate In-lbs. Deg	Sugg. Max. Defl. Deg	Sugg. Max. Load In-lbs. N-mm	No. of Coils	Wind Dir.	Wire Dia.		Sugg. Mandrel Dia. Inches mm	Mat'l	F n sh
										Inches	mm			
TO-5207L	0.747 18.97	0.937 23.80	3 76.20	1.33 33.78	0.0635 7.18	247	16 1807.68	11.75	Left	0.095	2.41	0.6	15.24	MW N
TO-5207LS	0.747 18.97	0.937 23.80	3 76.20	1.33 33.78	0.0592 6.69	225	13 1468.74	11.75	Left	0.095	2.41	0.6	15.24	SST N
TO-5207R	0.747 18.97	0.937 23.80	3 76.20	1.33 33.78	0.0635 7.18	247	16 1807.68	11.75	Right	0.095	2.41	0.6	15.24	MW N
TO-5207RS	0.747 18.97	0.937 23.80	3 76.20	1.33 33.78	0.0592 6.69	225	13 1468.74	11.75	Right	0.095	2.41	0.6	15.24	SST N
TO-5214LS	0.748 19.00	0.978 24.84	4 101.60	0.66 16.76	0.3111 35.17	71	22 2485.56	4.25	Left	0.115	2.92	0.61	15.49	SST N
TO-5214RS	0.748 19.00	0.978 24.84	4 101.60	0.66 16.76	0.3111 35.17	71	22 2485.56	4.25	Right	0.115	2.92	0.61	15.49	SST N
TO-5210L	0.751 19.08	0.943 23.95	3 76.20	1.65 41.91	0.0543 6.14	298	16 1807.68	14.625	Left	0.096	2.44	0.6	15.24	MW N
TO-5210R	0.751 19.08	0.943 23.95	3 76.20	1.65 41.91	0.0543 6.14	298	16 1807.68	14.625	Right	0.096	2.44	0.6	15.24	MW N
TO-5206L	0.752 19.10	0.936 23.77	3 76.20	1.1 27.94	0.0672 7.60	213	14 1581.72	9.875	Left	0.092	2.34	0.6	15.24	MW N
TO-5206R	0.752 19.10	0.936 23.77	3 76.20	1.1 27.94	0.0672 7.60	213	14 1581.72	9.875	Right	0.092	2.34	0.6	15.24	MW N
TO-5211L	0.752 19.10	0.944 23.98	3 76.20	1.15 29.21	0.0793 8.96	204	16 1807.68	9.875	Left	0.096	2.44	0.6	15.24	MW N
TO-5211R	0.752 19.10	0.944 23.98	3 76.20	1.15 29.21	0.0793 8.96	204	16 1807.68	9.875	Right	0.096	2.44	0.6	15.24	MW N
TO-5208L	0.754 19.15	0.938 23.83	3 76.20	1.48 37.59	0.0493 5.57	290	14 1581.72	13.625	Left	0.092	2.34	0.61	15.49	MW N
TO-5208R	0.754 19.15	0.938 23.83	3 76.20	1.48 37.59	0.0493 5.57	290	14 1581.72	13.625	Right	0.092	2.34	0.61	15.49	MW N
TO-5203L	0.756 19.20	0.926 23.52	2.5 63.50	0.57 14.48	0.0926 10.47	127	12 1355.76	5.125	Left	0.085	2.16	0.6	15.24	MW N
TO-5203R	0.756 19.20	0.926 23.52	2.5 63.50	0.57 14.48	0.0926 10.47	127	12 1355.76	5.125	Right	0.085	2.16	0.6	15.24	MW N
TO-5209L	0.756 19.20	0.94 23.88	3 76.20	0.62 15.75	0.1245 14.07	115	14 1581.72	5.125	Left	0.092	2.34	0.6	15.24	MW N
TO-5209R	0.756 19.20	0.94 23.88	3 76.20	0.62 15.75	0.1245 14.07	115	14 1581.72	5.125	Right	0.092	2.34	0.6	15.24	MW N
TO-5204L	0.757 19.23	0.927 23.55	2.5 63.50	0.92 23.37	0.0551 6.23	214	12 1355.76	8.875	Left	0.085	2.16	0.6	15.24	MW N
TO-5204R	0.757 19.23	0.927 23.55	2.5 63.50	0.92 23.37	0.0551 6.23	214	12 1355.76	8.875	Right	0.085	2.16	0.6	15.24	MW N
TO-5205L	0.757 19.23	0.927 23.55	2.5 63.50	1.27 32.26	0.0392 4.43	301	12 1355.76	12.625	Left	0.085	2.16	0.6	15.24	MW N
TO-5205R	0.757 19.23	0.927 23.55	2.5 63.50	1.27 32.26	0.0392 4.43	301	12 1355.76	12.625	Right	0.085	2.16	0.6	15.24	MW N
TO-5212L	0.757 19.23	0.949 24.10	3 76.20	0.65 16.51	0.1469 16.61	110	16 1807.68	5.125	Left	0.096	2.44	0.61	15.49	MW N
TO-5212R	0.757 19.23	0.949 24.10	3 76.20	0.65 16.51	0.1469 16.61	110	16 1807.68	5.125	Right	0.096	2.44	0.61	15.49	MW N
TO-1053	0.766 19.46	0.924 23.47	2.6 66.04	0.66 16.76	0.0537 6.07	143	7.7 869.95	6.625	Right	0.079	2.01	0.61	15.49	SPR Z
TO-1124	0.772 19.61	0.982 24.94	3.5 88.90	1.04 26.42	0.1248 14.11	144	18 2033.64	8	Right	0.105	2.67	0.63	16.00	SST N
TO-5215LS	0.772 19.61	0.982 24.94	3.5 88.90	1.16 29.46	0.1167 13.19	154	18 2033.64	9	Left	0.105	2.67	0.63	16.00	SST N
TO-5215RS	0.772 19.61	0.982 24.94	3.5 88.90	1.16 29.46	0.1167 13.19	154	18 2033.64	9	Right	0.105	2.67	0.63	16.00	SST N
TO-5213L	0.783 19.89	0.953 24.21	2.5 63.50	1.01 25.65	0.0476 5.38	248	12 1355.76	9.75	Left	0.085	2.16	0.62	15.75	MW N
TO-5213LS	0.783 19.89	0.953 24.21	2.5 63.50	1.01 25.65	0.0444 5.02	229	10 1129.80	9.75	Left	0.085	2.16	0.62	15.75	SST N
TO-5213R	0.783 19.89	0.953 24.21	2.5 63.50	1.01 25.65	0.0476 5.38	248	12 1355.76	9.75	Right	0.085	2.16	0.62	15.75	MW N
TO-5213RS	0.783 19.89	0.953 24.21	2.5 63.50	1.01 25.65	0.0444 5.02	229	10 1129.80	9.75	Right	0.085	2.16	0.62	15.75	SST N
TO-1107	0.785 19.94	0.875 22.23	1.5 38.10	0.77 19.56	0.0026 0.29	769	2 225.96	14.5	Right	0.045	1.14	0.58	14.73	MW N
TO-1078	0.812 20.62	1.05 26.67	1.5 38.10	1.08 27.43	0.214 24.19	115	25 2824.50	7.25	Right	0.12	3.05	0.66	16.76	SST N
TO-5222LS	0.813 20.65	1.043 26.49	4 101.60	1.27 32.26	0.1556 17.59	144	22 2485.56	9	Left	0.115	2.92	0.66	16.76	SST N
TO-5222RS	0.813 20.65	1.043 26.49	4 101.60	1.27 32.26	0.1556 17.59	144	22 2485.56	9	Right	0.115	2.92	0.66	16.76	SST N
TO-5218LS	0.824 20.93	0.994 25.25	2.5 63.50	0.65 16.51	0.0667 7.54	153	10 1129.80	6	Left	0.085	2.16	0.65	16.51	SST N
TO-5218RS	0.824 20.93	0.994 25.25	2.5 63.50	0.65 16.51	0.0667 7.54	153	10 1129.80	6	Right	0.085	2.16	0.65	16.51	SST N
TO-5224LS	0.832 21.13	1.082 27.48	4 101.60	1.51 38.35	0.1778 20.10	161	29 3276.42	10	Left	0.125	3.18	0.68	17.27	SST N
TO-1120	0.832 21.13	1.082 27.48	4 101.60	1.65 41.91	0.167 18.88	171	29 3276.42	11	Right	0.125	3.18	0.68	17.27	SST N
TO-5224RS	0.832 21.13	1.082 27.48	4 101.60	1.51 38.35	0.1778 20.10	161	29 3276.42	10	Right	0.125	3.18	0.68	17.27	SST N
TO-5227LS	0.832 21.13	1.102 27.99	4 101.60	0.93 23.62	0.4444 50.23	77	34 3841.32	5.25	Left	0.135	3.43	0.68	17.27	SST N
TO-5227RS	0.832 21.13	1.102 27.99	4 101.60	0.93 23.62	0.4444 50.23	77	34 3841.32	5.25	Right	0.135	3.43	0.68	17.27	SST N
TO-5216L	0.835 21.21	0.985 25.02	2 50.80	0.95 24.13	0.0256 2.89	321	8.2 926.44	10.5	Left	0.075	1.91	0.65	16.51	MW N
TO-5216LS	0.835 21.21	0.985 25.02	2 50.80	0.95 24.13	0.0241 2.72	294	7.1 802.16	10.5	Left	0.075	1.91	0.66	16.76	SST N
TO-5216R	0.835 21.21	0.985 25.02	2 50.80	0.95 24.13	0.0256 2.89	321	8.2 926.44	10.5	Right	0.075	1.91	0.65	16.51	MW N
TO-5216RS	0.835 21.21	0.985 25.02	2 50.80	0.95 24.13	0.0241 2.72	294	7.1 802.16	10.5	Right	0.075	1.91	0.66	16.76	SST N
TO-1018	0.843 21.41	0.971 24.66	0.92 23.37	0.53 13.46	0.0205 2.32	229	4.7 531.01	6.5	Left	0.064	1.63	0.65	16.51	SST N
TO-5220L	0.848 21.54	1.038 26.37	3 76.20	0.84 21.34	0.0952 10.76	166	16 1807.68	7	Left	0.095	2.41	0.68	17.27	MW N
TO-5220LS	0.848 21.54	1.038 26.37	3 76.20	0.84 21.34	0.0888 10.04	152	13 1468.74	7	Left	0.095	2.41	0.68	17.27	SST N
TO-5220R	0.848 21.54	1.038 26.37	3 76.20	0.84 21.34	0.0952 10.76	166	16 1807.68	7	Right	0.095	2.41	0.68	17.27	MW N
TO-5220RS	0.848 21.54	1.038 26.37	3 76.20	0.84 21.34	0.0888 10.04	152	13 1468.74	7	Right	0.095	2.41	0.68	17.27	SST N
TO-5225LS	0.856 21.74	1.086 27.58	4 101.60	1.74 44.20	0.1037 11.72	217	22 2485.56	12.75	Left	0.115	2.92	0.69	17.53	SST N
TO-5225RS	0.856 21.74	1.086 27.58	4 101.60	1.74 44.20	0.1037 11.72	217	22 2485.56	12.75	Right	0.115	2.92	0.69	17.53	SST N
TO-5219L	0.859 21.82	1.015 25.78	2 50.80	0.99 25.15	0.029 3.28	318	9.2 1039.42	10.5	Left	0.078	1.98	0.67	17.02	MW N
TO-5219LS	0.859 21.82	1.015 25.78	2 50.80	0.99 25.15	0.0271 3.06	294	8 903.84	10.5	Left	0.078	1.98	0.68	17.27	SST N
TO-5219R	0.859 21.82	1.015 25.78	2 50.80	0.99 25.15	0.029 3.28	318	9.2 1039.42	10.5	Right	0.078	1.98	0.67	17.02	MW N
TO-5219RS	0.859 21.82	1.015 25.78	2 50.80	0.99 25.15	0.0271 3.06	294	8 903.84	10.5	Right	0.078	1.98	0.68	17.27	SST N
TO-5221LS	0.87 22.10	1.04 26.42	2.5 63.50											



Century Spring

Torsion Springs

Torsion Springs

Century Stock Number	I.D.		O.D.		Leg Length Inches mm	Body Length Inches mm	Rate			Sugg. Max. Defl. Deg	Sugg. Max. Load In-Lbs. N-mm	No. of Coils	Wind Dir.	Wire Dia.		Sugg. Mandrel Dia.		Mat'l	F nsh		
	Inches	mm	Inches	mm			In-Lbs. Deg	N-mm Deg	Inches					Inches	mm	Inches	mm				
TO-5237R	0.898	22.81	1.148	29.16	4	101.60	0.98	24.89	0.2937	33.20	117	34	3841.32	6.125	Right	0.125	3.18	0.72	18.29	MW	N
TO-5238L	0.898	22.81	1.148	29.16	4	101.60	1.63	41.40	0.1708	19.31	201	34	3841.32	10.875	Left	0.125	3.18	0.73	18.54	MW	N
TO-5238R	0.898	22.81	1.148	29.16	4	101.60	1.63	41.40	0.1708	19.31	201	34	3841.32	10.875	Right	0.125	3.18	0.73	18.54	MW	N
TO-5232R	0.902	22.91	1.126	28.60	4	101.60	1.34	34.04	0.1223	13.82	203	25	2824.50	9.875	Right	0.112	2.84	0.73	18.54	MW	N
TO-5232L	0.902	22.91	1.126	28.60	4	101.60	1.34	34.04	0.1223	13.82	203	25	2824.50	9.875	Left	0.112	2.84	0.73	18.54	MW	N
TO-5229L	0.904	22.96	1.114	28.30	3.5	88.90	1.69	42.93	0.0701	7.92	304	21	2372.58	13.625	Left	0.105	2.67	0.72	18.29	MW	N
TO-5229R	0.904	22.96	1.114	28.30	3.5	88.90	1.69	42.93	0.0701	7.92	304	21	2372.58	13.625	Right	0.105	2.67	0.72	18.29	MW	N
TO-5233L	0.904	22.96	1.128	28.65	4	101.60	1.8	45.72	0.0898	10.15	277	25	2824.50	13.625	Left	0.112	2.84	0.73	18.54	MW	N
TO-5233R	0.904	22.96	1.128	28.65	4	101.60	1.8	45.72	0.0898	10.15	277	25	2824.50	13.625	Right	0.112	2.84	0.73	18.54	MW	N
TO-5230L	0.907	23.04	1.117	28.37	3.5	88.90	0.71	18.03	0.1773	20.04	120	21	2372.58	5.125	Left	0.105	2.67	0.72	18.29	MW	N
TO-5230R	0.907	23.04	1.117	28.37	3.5	88.90	0.71	18.03	0.1773	20.04	120	21	2372.58	5.125	Right	0.105	2.67	0.72	18.29	MW	N
TO-5231L	0.908	23.06	1.118	28.40	3.5	88.90	1.14	28.96	0.1059	11.97	201	21	2372.58	8.875	Left	0.105	2.67	0.73	18.54	MW	N
TO-5231R	0.908	23.06	1.118	28.40	3.5	88.90	1.14	28.96	0.1059	11.97	201	21	2372.58	8.875	Right	0.105	2.67	0.73	18.54	MW	N
TO-5235L	0.908	23.06	1.132	28.75	4	101.60	0.75	19.05	0.2258	25.52	110	25	2824.50	5.125	Left	0.112	2.84	0.73	18.54	MW	N
TO-5235R	0.908	23.06	1.132	28.75	4	101.60	0.75	19.05	0.2258	25.52	110	25	2824.50	5.125	Right	0.112	2.84	0.73	18.54	MW	N
TO-5243LS	0.919	23.34	1.189	30.20	4	101.60	1.63	41.40	0.2222	25.12	156	35	3954.30	10	Left	0.135	3.43	0.75	19.05	SST	N
TO-5243RS	0.919	23.34	1.189	30.20	4	101.60	1.63	41.40	0.2222	25.12	156	35	3954.30	10	Right	0.135	3.43	0.75	19.05	SST	N
TO-5228L	0.92	23.37	1.11	28.19	3	76.20	1.12	28.45	0.0635	7.18	251	16	1807.68	9.75	Left	0.095	2.41	0.73	18.54	MW	N
TO-5228LS	0.92	23.37	1.11	28.19	3	76.20	1.12	28.45	0.0592	6.69	229	14	1581.72	9.75	Left	0.095	2.41	0.73	18.54	SST	N
TO-5228R	0.92	23.37	1.11	28.19	3	76.20	1.12	28.45	0.0635	7.18	251	16	1807.68	9.75	Right	0.095	2.41	0.73	18.54	MW	N
TO-5228RS	0.92	23.37	1.11	28.19	3	76.20	1.12	28.45	0.0592	6.69	229	14	1581.72	9.75	Right	0.095	2.41	0.73	18.54	SST	N
TO-5242LS	0.939	23.85	1.189	30.20	4	101.60	2.03	51.56	0.1185	13.40	244	29	3276.42	13.75	Left	0.125	3.18	0.76	19.30	SST	N
TO-5242RS	0.939	23.85	1.189	30.20	4	101.60	2.03	51.56	0.1185	13.40	244	29	3276.42	13.75	Right	0.125	3.18	0.76	19.30	SST	N
TO-5234RS	0.941	23.90	1.131	28.73	3	76.20	0.73	18.54	0.0889	10.05	153	14	1581.72	6	Right	0.095	2.41	0.75	19.05	SST	N
TO-5234LS	0.941	23.90	1.131	28.73	3	76.20	0.73	18.54	0.0889	10.05	153	14	1581.72	6	Left	0.095	2.41	0.75	19.05	SST	N
TO-1022	1	25.40	1.18	29.97	1.2	30.48	0.52	13.21	0.1093	12.36	100	11	1242.78	4.25	Right	0.09	2.29	0.8	20.32	HD	Z
TO-5244LS	1.013	25.73	1.203	30.56	3	76.20	1.02	25.91	0.0593	6.70	230	14	1581.72	8.75	Left	0.095	2.41	0.8	20.32	SST	N
TO-5244RS	1.013	25.73	1.203	30.56	3	76.20	1.02	25.91	0.0593	6.70	230	14	1581.72	8.75	Right	0.095	2.41	0.8	20.32	SST	N
TO-5247LS	1.031	26.19	1.301	33.05	4	101.60	2.19	55.63	0.1482	16.75	236	35	3954.30	13.75	Left	0.135	3.43	0.84	21.34	SST	N
TO-5247RS	1.031	26.19	1.301	33.05	4	101.60	2.19	55.63	0.1482	16.75	236	35	3954.30	13.75	Right	0.135	3.43	0.84	21.34	SST	N
TO-5246LS	1.038	26.37	1.248	31.70	3.5	88.90	0.92	23.37	0.1167	13.19	157	18	2033.64	7	Left	0.105	2.67	0.83	21.08	SST	N
TO-5246RS	1.038	26.37	1.248	31.70	3.5	88.90	0.92	23.37	0.1167	13.19	157	18	2033.64	7	Right	0.105	2.67	0.83	21.08	SST	N
TO-5245L	1.053	26.75	1.243	31.57	3	76.20	1.31	33.27	0.0476	5.38	337	16	1807.68	11.5	Left	0.095	2.41	0.83	21.08	MW	N
TO-5245LS	1.053	26.75	1.243	31.57	3	76.20	1.31	33.27	0.0444	5.02	308	14	1581.72	11.5	Left	0.095	2.41	0.83	21.08	SST	N
TO-5245R	1.053	26.75	1.243	31.57	3	76.20	1.31	33.27	0.0476	5.38	337	16	1807.68	11.5	Right	0.095	2.41	0.83	21.08	MW	N
TO-5245RS	1.053	26.75	1.243	31.57	3	76.20	1.31	33.27	0.0444	5.02	308	14	1581.72	11.5	Right	0.095	2.41	0.83	21.08	SST	N
TO-5250LS	1.106	28.09	1.356	34.44	4	101.60	1.24	31.50	0.1778	20.10	164	29	3276.42	8	Left	0.125	3.18	0.89	22.61	SST	N
TO-5250RS	1.106	28.09	1.356	34.44	4	101.60	1.24	31.50	0.1778	20.10	164	29	3276.42	8	Right	0.125	3.18	0.89	22.61	SST	N
TO-5249LS	1.117	28.37	1.347	34.21	4	101.60	1.01	25.65	0.1556	17.59	147	23	2598.54	7	Left	0.115	2.92	0.9	22.86	SST	N
TO-5249RS	1.117	28.37	1.347	34.21	4	101.60	1.01	25.65	0.1556	17.59	147	23	2598.54	7	Right	0.115	2.92	0.9	22.86	SST	N
TO-1026	1.125	28.58	1.227	31.17	1.2	30.48	0.25	6.35	0.0127	1.44	220	2.8	316.34	3.5	Left	0.051	1.30	0.81	20.57	MW	N
TO-5248LS	1.132	28.75	1.342	34.09	3.5	88.90	1.13	28.70	0.0778	8.79	237	18	2033.64	8.75	Left	0.105	2.67	0.89	22.61	SST	N
TO-5248RS	1.132	28.75	1.342	34.09	3.5	88.90	1.13	28.70	0.0778	8.79	237	18	2033.64	8.75	Right	0.105	2.67	0.89	22.61	SST	N
TO-5251LS	1.159	29.44	1.369	34.77	3.5	88.90	1.44	36.58	0.0583	6.59	317	18	2033.64	11.5	Left	0.105	2.67	0.92	23.37	SST	N
TO-5251RS	1.159	29.44	1.369	34.77	3.5	88.90	1.44	36.58	0.0583	6.59	317	18	2033.64	11.5	Right	0.105	2.67	0.92	23.37	SST	N
TO-5252LS	1.205	30.61	1.435	36.45	4	101.60	1.23	31.24	0.1037	11.72	222	23	2598.54	8.75	Left	0.115	2.92	0.96	24.38	SST	N
TO-5252RS	1.205	30.61	1.435	36.45	4	101.60	1.23	31.24	0.1037	11.72	222	23	2598.54	8.75	Right	0.115	2.92	0.96	24.38	SST	N
TO-5254LS	1.221	31.01	1.491	37.87	4	101.60	1.34	34.04	0.2222	25.12	159	35	3954.30	8	Left	0.135	3.43	0.98	24.89	SST	N
TO-5254RS	1.221	31.01	1.491	37.87	4	101.60	1.34	34.04	0.2222	25.12	159	35	3954.30	8	Right	0.135	3.43	0.98	24.89	SST	N
TO-5253LS	1.235	31.37	1.465	37.21	4	101.60	1.58	40.13	0.0778	8.79	297	23	2598.54	11.5	Left	0.115	2.92	0.98	24.89	SST	N
TO-5253RS	1.235	31.37	1.465	37.21	4																

Tapered Springs


Century Spring stocks a large selection of conically-tapered compression springs. This configuration of spring is characterized not only by its shape, but also by the fact that its rate is normally non-linear. There is a necessary increase in the applied force to compress the spring due to the flexibility of the larger-diameter coils causing progressive contact with one another. This characteristic can be a plus for spring-supported vibrating objects by reducing the resonant (bouncing) amplitudes

commonly found in constant-diameter, spring-supported systems.

The conical spring has more lateral stability and less tendency to buckle than regular compression springs. Probably the most beneficial characteristic of this spring is that it can be designed so that each active coil fits within the next coil.

If the needed spring for your application cannot be found in our catalog inventory, we can fabricate it for you.

Design Information

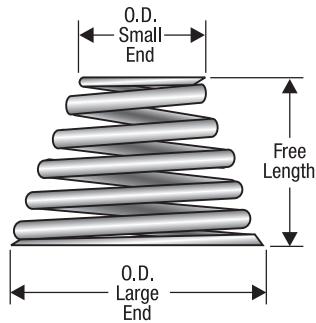

To calculate the highest stress at a given load or deflection for a tapered spring, the mean diameter of the largest active coil is input into the equations found in the "Compression Spring" section of this catalog.

An approximate rate for a tapered spring can be calculated by inputting the spring's average mean diameter into the rate equation for a regular compression spring, found in that section of this catalog. The rate for a tapered spring becomes non-linear once the

larger diameter adjacent coils come in contact with one another during compression. This loss of active coils will cause it to become stiffer. The rate noted in our inventory listing is the approximate rate (**average rate**).

Aside from any stress limits, the solid (minimum) length limit of a uniformly tapered, not fully-collapsible spring with closed ends, can be estimated from:

$$H = \sqrt{\frac{(N^2 + 2N + 1) d^2 - (OD_L - OD_s + 2d)^2}{2}}$$

Where:
 H = Final height (length), inches
 d = Wire diameter, inches
 N = Total number of coils
 u = Largest O.D. minus smallest O.D. divided by $2n$
 OD_L = O.D. at the large end, inches
 OD_s = O.D. at the small end, inches

NOTE: The tapered springs minimum compressed length may be stress limited. Call us and we'll check.

Spring Characteristics

Materials

The highest grade of spring wire is used for fabricating our springs. Certifications of conformance for geometric tolerances are available for our stock springs upon request. See the Custom Spring section on page 10 of this catalog if material certifications or unique materials are required. The following materials are used in the fabrication of our tapered springs.

Spring Steel (music wire, hard-drawn wire, oil-tempered wire)

Stainless Steel 302

Phosphor-Bronze

Finish

The finishes available for tapered springs are as indicated in the "Finish" column of our inventory listings found in the following pages which include:


Zinc

Gold Iridite®

Black Oxide

Passivated (upon request)

None (can be plated upon request)




Century Spring

Tapered Springs


Tapered Springs

Century Stock Number	Sm. O.D.		Lg. O.D.		Sm. I.D.		Free Length		Wire Dia.		Average rate		Solid Height		Total Coils	Mat'l	Ends	Fns'h
	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm				
TA-2238	0.078	1.98	0.531	13.49	0.054	1.37	0.75	19.05	0.012	0.3	0.1	0.02	0.16	4.06	12	SPR	C	Z
TA-2392	0.086	2.18	0.163	4.14	0.064	1.63	0.22	5.59	0.011	0.28	3.1	0.54	0.06	1.52	6	SST	C	N
TA-2390	0.1	2.54	0.17	4.32	0.066	1.68	1	25.4	0.017	0.43	2.6	0.46	0.53	13.46	30	SPR	C	N
TA-2302	0.125	3.18	0.25	6.35	0.101	2.57	0.44	11.18	0.012	0.3	0.7	0.12	0.1	2.54	9	SST	C	N
TA-2129	0.125	3.18	0.281	7.14	0.075	1.91	0.16	4.06	0.025	0.64	86.6	15.17	0.05	1.27	3	SST	C	N
TA-2258	0.125	3.18	0.281	7.14	0.105	2.67	0.5	12.7	0.01	0.25	0.2	0.04	0.13	3.3	14	SPR	C	N
TA-2275	0.125	3.18	0.438	11.13	0.073	1.85	0.28	7.11	0.026	0.66	22.8	3.99	0.05	1.27	3.5	SST	C	N
TA-2154	0.125	3.18	0.609	15.47	0.085	2.16	0.31	7.87	0.02	0.51	0.5	0.09	0.04	1.02	11.5	SST	C	N
TA-2332	0.141	3.58	0.312	7.92	0.117	2.97	0.88	22.35	0.012	0.3	0.2	0.04	0.24	6.1	19.8	SST	C	N
TA-2406	0.146	3.71	0.35	8.89	0.112	2.84	0.56	14.22	0.017	0.43	1.4	0.25	0.16	4.06	8.25	SST	C	N
TA-2319	0.156	3.96	0.203	5.16	0.116	2.95	0.38	9.65	0.02	0.51	14.2	2.49	0.14	3.56	6	SPR	C	BO
TA-2321	0.156	3.96	0.234	5.94	0.128	3.25	1.19	30.23	0.014	0.36	1.2	0.21	0.15	3.81	10	SPR	C	N
TA-2133	0.156	3.96	0.281	7.14	0.12	3.05	0.38	9.65	0.018	0.46	5.4	0.95	0.04	1.02	5	SST	C	N
TA-2241	0.156	3.96	0.312	7.92	0.116	2.95	0.2	5.08	0.02	0.51	10.4	1.82	0.04	1.02	4.25	SPR	C	Z
TA-2415	0.156	3.96	0.312	7.92	0.11	2.79	0.2	5.08	0.023	0.58	24.5	4.29	0.05	1.27	3.75	MW	C	Z
TA-2326	0.156	3.96	0.469	11.91	0.112	2.84	0.88	22.35	0.022	0.56	2.5	0.44	0.04	1.02	7.5	SPR	C	N
TA-2148	0.172	4.37	0.281	7.14	0.132	3.35	0.53	13.46	0.02	0.51	3	0.53	0.21	5.33	9.5	SST	C	N
TA-2075	0.172	4.37	0.312	7.92	0.136	3.45	0.38	9.65	0.018	0.46	3.4	0.6	0.1	2.54	6	SPR	C	BO
TA-2080	0.172	4.37	0.312	7.92	0.128	3.25	0.31	7.87	0.022	0.56	10.5	1.84	0.1	2.54	5	SPR	C	BO
TA-2167	0.172	4.37	0.343	8.71	0.134	3.4	0.59	14.99	0.019	0.48	3.1	0.54	0.1	2.54	6.5	SPR	C	BO
TA-2343	0.172	4.37	0.453	11.51	0.126	3.2	0.75	19.05	0.023	0.58	3.4	0.6	0.05	1.27	6.25	SST	C	N
TA-2349	0.172	4.37	0.484	12.29	0.126	3.2	0.88	22.35	0.023	0.58	2.4	0.42	0.05	1.27	7.25	SST	C	N
TA-2085	0.187	4.75	0.25	6.35	0.159	4.04	0.5	12.7	0.014	0.36	1.6	0.28	0.09	2.29	6	MW	C	Z
TA-2311	0.187	4.75	0.25	6.35	0.157	3.99	0.22	5.59	0.015	0.38	8.6	1.51	0.03	0.76	3	SPR	C	N
TA-2090	0.187	4.75	0.281	7.14	0.155	3.94	0.31	7.87	0.016	0.41	2.3	0.4	0.1	2.54	6	SPR	C	Z
TA-2139	0.187	4.75	0.281	7.14	0.139	3.53	0.56	14.22	0.024	0.61	6	1.05	0.24	6.1	9.5	SST	C	N
TA-2147	0.187	4.75	0.281	7.14	0.129	3.28	1.31	33.27	0.029	0.74	11.2	1.96	0.39	9.91	12.5	SPR	C	Z
TA-2314	0.187	4.75	0.296	7.52	0.147	3.73	0.63	16	0.02	0.51	4.3	0.75	0.14	3.56	6.25	SST	C	N
TA-2289	0.187	4.75	0.312	7.92	0.157	3.99	0.94	23.88	0.015	0.38	0.6	0.11	0.02	0.51	10	SST	C	N
TA-2352	0.187	4.75	0.312	7.92	0.163	4.14	0.41	10.41	0.012	0.3	0.3	0.05	0.08	2.03	8	SST	C	N
TA-2213	0.187	4.75	0.328	8.33	0.155	3.94	0.25	6.35	0.016	0.41	2.9	0.51	0.09	2.29	4	SST	C	N
TA-2100	0.187	4.75	0.375	9.53	0.143	3.63	0.31	7.87	0.022	0.56	5.6	0.98	0.05	1.27	5	SST	C	Z
TA-2230	0.187	4.75	0.375	9.53	0.127	3.23	1.56	39.62	0.03	0.76	6.7	1.17	0.41	10.41	13	SPR	C	Z
TA-2253	0.187	4.75	0.375	9.53	0.143	3.63	0.75	19.05	0.022	0.56	2.8	0.49	0.08	2.03	8	SST	C	N
TA-2340	0.187	4.75	0.391	9.93	0.161	4.09	0.56	14.22	0.013	0.33	0.5	0.09	0.03	0.76	6.25	SPR	C	Z
TA-2222	0.187	4.75	0.813	20.65	0.139	3.53	0.63	16	0.024	0.61	2.2	0.39	0.03	0.76	4	SPR	C	Z
TA-2527	0.2	5.08	0.55	13.97	0.128	3.25	0.32	8.13	0.036	0.91	24.8	4.34	0.07	1.78	4.5	SPR	C	Z
TA-2288	0.203	5.16	0.25	6.35	0.177	4.5	0.16	4.06	0.013	0.33	3.7	0.65	0.09	2.29	3	SST	C	N
TA-2367	0.203	5.16	0.25	6.35	0.173	4.39	0.5	12.7	0.015	0.38	1.1	0.19	0.14	3.56	8	SST	C	N
TA-2155	0.203	5.16	0.296	7.52	0.149	3.78	0.69	17.53	0.027	0.69	12.1	2.12	0.1	2.54	7	SST	C	Z
TA-2176	0.203	5.16	0.296	7.52	0.163	4.14	0.41	10.41	0.02	0.51	7.6	1.33	0.08	2.03	4.5	SPR	C	Z
TA-2338	0.203	5.16	0.296	7.52	0.171	4.34	0.25	6.35	0.016	0.41	3.3	0.58	0.04	1.02	4.25	SPR	C	Z
TA-2086	0.203	5.16	0.312	7.92	0.169	4.29	0.25	6.35	0.017	0.43	3.8	0.67	0.04	1.02	4	SST	C	N
TA-2294	0.203	5.16	0.312	7.92	0.171	4.34	0.94	23.88	0.016	0.41	0.7	0.12	0.19	4.83	11	SST	C	Z
TA-2204	0.203	5.16	0.328	8.33	0.123	3.12	0.72	18.29	0.04	1.02	38.9	6.81	0.45	11.43	10.3	SPR	C	Z
TA-2153	0.203	5.16	0.359	9.12	0.167	4.24	0.38	9.65	0.018	0.46	2.4	0.42	0.04	1.02	5	SST	CG	N
TA-2107	0.203	5.16	0.421	10.69	0.139	3.53	0.31	7.87	0.032	0.81	30.5	5.34	0.06	1.52	4.25	SPR	CG	N
TA-2202	0.203	5.16	0.5	12.7	0.153	3.89	0.28	7.11	0.025	0.64	5.4	0.95	0.06	1.52	5	SPR	C	Z
TA-2218	0.203	5.16	0.5	12.7	0.159	4.04	0.75	19.05	0.022	0.56	1.8	0.32	0.17	4.32	6.5	SST	C	N
TA-2370	0.203	5.16	0.562	14.27	0.143	3.63	1.31	33.27	0.03	0.76	4.9	0.86	0.06	1.52	6.75	SST	C	N
TA-2174	0.219	5.56	0.265	6.73	0.179	4.55	0.23	5.84	0.02	0.51	9.1	1.59	0.1	2.54	4	SST	C	N
TA-2137	0.219	5.56	0.296	7.52	0.127	3.23	0.41	10.41	0.046	1.17	107.6	18.84	0.35	8.89	7.5	SST	CG	N
TA-2231	0.219	5.56	0.312	7.92	0.189	4.8	0.88	22.35	0.015	0.38	0.6	0.11	0.15	3.81	9	SST	C	N
TA-2353	0.219	5.56	0.359	9.12	0.157	3.99	0.63	16	0.031	0.79	9.6	1.68	0.3	7.62	9	SST	C	N
TA-2187	0.219	5.56	0.375	9.53	0.189	4.8	0.88	22.35	0.015	0.38	0.3	0.05	0.06	1.52	11	SST	C	N
TA-2212	0.219	5.56	0.375	9.53	0.159	4.04	0.61	15.49	0.03	0.76	7.6	1.33	0.29	7.37	9	SST	C	N
TA-2270	0.219	5.56	0.406	10.31	0.175	4.45	0.75	19.05	0.022	0.56	2.3	0.4	0.16	4.06	8	SPR	C	N
TA-2301	0.219	5.56	0.406	10.31	0.179	4.55	0.38	9.65	0.02	0.51	3.7	0.65	0.04	1.02	4.5	SPR	C	N
TA-2227	0.219	5.56	0.468	11.89	0.179	4.55	0.22	5.59	0.02	0.51	3.4	0.6	0.04	1.02	4	SPR	C	Z
TA-2366	0.219	5.56	0.5	12.7	0.149	3.78	0.41	10.41	0.035	0.89	25.3	4.43	0.07	1.78	4.5	SPR	C	Z
TA-2396	0.228	5.79	0.262	6.65	0.142	3.61	1.31	33.27	0.043	1.09	42.6	7.46	0.74	18.8	16	SPR	C	BO
TA-2361	0.234	5.94	0.297	7.54	0.198	5.03	0.66	16.76	0.018</									



Tapered Springs

Century Stock Number	Sm. O.D.		Lg. O.D.		Sm. I.D.		Free Length		Wire Dia.		Average rate		Solid Height		Total Coils	Mat'l	Ends	Finish
	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm				
TA-2277	0.25	6.35	0.406	10.31	0.2	5.08	0.63	16	0.025	0.64	9	1.58	0.05	1.27	4.25	SPR	C	Z
TA-2313	0.25	6.35	0.406	10.31	0.222	5.64	0.41	10.41	0.014	0.36	0.7	0.12	0.03	0.76	4.25	SST	C	N
TA-2372	0.25	6.35	0.406	10.31	0.188	4.78	1.38	35.05	0.031	0.79	4.6	0.81	0.4	10.16	13	SPR	CG	N
TA-2279	0.25	6.35	0.421	10.69	0.21	5.33	0.63	16	0.02	0.51	1.3	0.23	0.12	3.05	7	SST	C	N
TA-2306	0.25	6.35	0.469	11.91	0.21	5.33	0.56	14.22	0.02	0.51	1.2	0.21	0.04	1.02	7	SPR	C	BO
TA-2070	0.25	6.35	0.5	12.7	0.202	5.13	0.38	9.65	0.024	0.61	2.6	0.46	0.05	1.27	5.75	SST	C	N
TA-2092	0.25	6.35	0.5	12.7	0.19	4.83	0.56	14.22	0.03	0.76	7.1	1.24	0.03	0.76	6	SPR	C	Z
TA-2201	0.25	6.35	0.5	12.7	0.17	4.32	0.69	17.53	0.04	1.02	26.1	4.57	0.21	5.33	5.75	SPR	C	BO
TA-2280	0.25	6.35	0.5	12.7	0.19	4.83	0.63	16	0.03	0.76	7.6	1.33	0.06	1.52	5.75	SPR	C	Z
TA-2336	0.25	6.35	0.5	12.7	0.124	3.15	0.81	20.57	0.0625	1.59	152.6	26.73	0.359	9.12	6.25	SST	CG	N
TA-2342	0.25	6.35	0.5	12.7	0.168	4.27	0.44	11.18	0.041	1.04	47.4	8.3	0.09	2.29	4	SST	C	N
TA-2104	0.25	6.35	0.562	14.27	0.17	4.32	0.59	14.99	0.04	1.02	17.4	3.05	0.08	2.03	5.75	SST	C	N
TA-2257	0.25	6.35	0.75	19.05	0.19	4.83	0.56	14.22	0.03	0.76	1.5	0.26	0.06	1.52	9.5	SPR	C	Z
TA-2141	0.25	6.35	0.781	19.84	0.168	4.27	0.75	19.05	0.041	1.04	3.4	0.6	0.09	2.29	8	PB	C	N
TA-2323	0.25	6.35	0.938	23.83	0.188	4.78	0.94	23.88	0.031	0.79	1.1	0.19	0.06	1.52	9	SPR	C	N
TA-2327	0.25	6.35	0.938	23.83	0.19	4.83	1	25.4	0.03	0.76	0.9	0.16	0.06	1.52	9	SPR	C	Z
TA-2354	0.266	6.76	0.375	9.53	0.196	4.98	0.42	10.67	0.035	0.89	32.2	5.64	0.16	4.06	4.5	SST	C	N
TA-2119	0.266	6.76	0.421	10.69	0.226	5.74	0.44	11.18	0.02	0.51	1.5	0.26	0.06	1.52	6	SST	C	N
TA-2068	0.266	6.76	0.5	12.7	0.218	5.54	0.27	6.86	0.024	0.61	3.6	0.63	0.05	1.27	4.5	SST	C	N
TA-2229	0.281	7.14	0.344	8.74	0.223	5.66	0.56	14.22	0.029	0.74	7.4	1.3	0.24	6.1	8	SPR	C	N
TA-2183	0.281	7.14	0.359	9.12	0.211	5.36	0.5	12.7	0.035	0.89	27	4.73	0.17	4.32	5	SST	CG	N
TA-2108	0.281	7.14	0.406	10.31	0.243	6.17	0.25	6.35	0.019	0.48	2.4	0.42	0.04	1.02	4	SST	C	N
TA-2388	0.281	7.14	0.406	10.31	0.241	6.12	0.28	7.11	0.02	0.51	3.9	0.68	0.04	1.02	3.5	SST	C	N
TA-2308	0.281	7.14	0.469	11.91	0.249	6.32	0.56	14.22	0.016	0.41	0.3	0.05	0.04	1.02	9	SST	C	N
TA-2084	0.281	7.14	0.5	12.7	0.231	5.87	0.31	7.87	0.025	0.64	4	0.7	0.05	1.27	4.5	SST	C	N
TA-2315	0.281	7.14	0.562	14.27	0.201	5.11	1	25.4	0.04	1.02	9.5	1.66	0.33	8.38	9	SPR	C	Z
TA-2237	0.281	7.14	0.625	15.88	0.237	6.02	0.63	16	0.022	0.56	1.4	0.25	0.03	0.76	5	SPR	C	N
TA-2224	0.281	7.14	0.75	19.05	0.179	4.55	1.38	35.05	0.051	1.3	10.6	1.86	0.44	11.18	10	SST	C	N
TA-2394	0.295	7.49	0.358	9.09	0.231	5.87	1.66	42.16	0.032	0.81	4.5	0.79	0.44	11.18	13.5	SST	CG	N
TA-2271	0.296	7.52	0.375	9.53	0.262	6.65	0.31	7.87	0.017	0.43	2.2	0.39	0.03	0.76	3.5	SST	C	N
TA-2250	0.296	7.52	0.406	10.31	0.24	6.1	0.75	19.05	0.028	0.71	2.5	0.44	0.31	7.87	11	SST	C	N
TA-2143	0.296	7.52	0.484	12.29	0.214	5.44	1.13	28.7	0.041	1.04	10.4	1.82	0.41	10.41	10	SST	C	N
TA-2197	0.296	7.52	0.484	12.29	0.216	5.49	0.5	12.7	0.04	1.02	29.9	5.24	0.11	2.79	4.5	SST	C	N
TA-2364	0.297	7.54	0.609	15.47	0.195	4.95	1	25.4	0.051	1.3	21.7	3.8	0.42	10.67	8	SST	C	N
TA-2383	0.306	7.77	0.406	10.31	0.266	6.76	0.5	12.7	0.02	0.51	2.1	0.37	0.04	1.02	4.5	SST	C	N
TA-2387	0.306	7.77	0.468	11.89	0.276	7.01	0.75	19.05	0.015	0.38	0.2	0.04	0.03	0.76	7.25	SST	C	N
TA-2088	0.312	7.92	0.406	10.31	0.272	6.91	0.22	5.59	0.02	0.51	2.6	0.46	0.04	1.02	4	SST	C	N
TA-2171	0.312	7.92	0.406	10.31	0.276	7.01	0.34	8.64	0.018	0.46	1.7	0.3	0.04	1.02	4	SST	C	N
TA-2269	0.312	7.92	0.406	10.31	0.252	6.4	0.5	12.7	0.03	0.76	7.1	1.24	0.18	4.57	6	SST	C	N
TA-2252	0.312	7.92	0.469	11.91	0.23	5.84	1.19	30.23	0.041	1.04	10.3	1.8	0.41	10.41	10	SST	CG	N
TA-2120	0.312	7.92	0.47	11.94	0.28	7.11	0.25	6.35	0.016	0.41	1.8	0.32	0.03	0.76	3	MW	C	Z
TA-2122	0.312	7.92	0.5	12.7	0.228	5.79	1.38	35.05	0.042	1.07	13.3	2.33	0.41	10.41	9	SPR	C	Z
TA-2255	0.312	7.92	0.5	12.7	0.192	4.88	0.63	16	0.06	1.52	119.9	21	0.39	9.91	5.75	SPR	C	Z
TA-2281	0.312	7.92	0.5	12.7	0.232	5.89	0.5	12.7	0.04	1.02	20.4	3.57	0.08	2.03	4	PB	C	N
TA-2322	0.312	7.92	0.562	14.27	0.242	6.15	0.25	6.35	0.035	0.89	19.3	3.38	0.07	1.78	3.5	SST	C	N
TA-2316	0.312	7.92	0.625	15.88	0.21	5.33	1.13	28.7	0.051	1.3	16	2.8	0.44	11.18	9.25	SST	CG	N
TA-2232	0.312	7.92	0.718	18.24	0.232	5.89	1.81	45.97	0.04	1.02	3.4	0.6	0.41	10.41	10.8	SST	C	N
TA-2307	0.312	7.92	0.75	19.05	0.23	5.84	0.5	12.7	0.041	1.04	9.4	1.65	0.08	2.03	4	PB	C	N
TA-2130	0.312	7.92	0.781	19.84	0.232	5.89	0.63	16	0.04	1.02	11.3	1.98	0.08	2.03	4.5	SPR	C	Z
TA-2264	0.312	7.92	1.125	28.58	0.262	6.65	1.25	31.75	0.025	0.64	0.2	0.04	0.05	1.27	9.5	SPR	C	N
TA-2393	0.32	8.13	0.45	11.43	0.238	6.05	2	50.8	0.041	1.04	6.2	1.09	0.74	18.8	18	SPR	CG	Z
TA-2198	0.328	8.33	0.421	10.69	0.284	7.21	0.75	19.05	0.022	0.56	1.2	0.21	0.17	4.32	7.5	SST	C	N
TA-2200	0.328	8.33	0.625	15.88	0.214	5.44	2	50.8	0.057	1.45	24.9	4.36	0.57	14.48	10.3	SPR	C	Z
TA-2140	0.335	8.51	0.39	9.91	0.299	7.59	0.38	9.65	0.018	0.46	1.6	0.28	0.04	1.02	4	SST	C	N
TA-2064	0.343	8.71	0.421	10.69	0.291	7.39	0.69	17.53	0.026	0.66	2.3	0.4	0.22	5.59	7.5	SST	C	N
TA-2091	0.343	8.71	0.421	10.69	0.249	6.32	0.81	20.57	0.047	1.19	40.6	7.11	0.28	7.11	6	SST	CG	N
TA-2175	0.343	8.71	0.438	11.13	0.257	6.53	0.25	6.35	0.043	1.09	67.9	11.89	0.16	4.06	3.5	SST	CG	N
TA-2248	0.343	8.71	0.438	11.13	0.283	7.19	0.63	16	0.03	0.76	5	0.88	0.24	6.1	7	SPR	C	N
TA-2158	0.343	8.71	0.484	12.29	0.223	5.66	0.53	13.46	0.06	1.52	112.5	19.7	0.34	8.64	5.75	SPR	CG	N
TA-2234	0.343	8.71	0.5	12.7	0.225	5.72	1	25.4	0.059	1.5	53	9.28	0.53	13.46	8	SST	C	N
TA-2351	0.343	8.71	0.5	12.7	0.263	6.68	0.88	22.35	0.04	1.02	11.5	2.01	0.31	7.87	7	SST	C	N
TA-2251	0.343	8.71	0.562	14.27	0.273	6.93	1.06	26.92	0.035	0.89	3.2	0.56	0.34	8.64				




Century Spring

Tapered Springs


Tapered Springs

Century Stock Number	Sm. O.D.		Lg. O.D.		Sm. I.D.		Free Length		Wire Dia.		Average rate		Solid Height		Total Coils	Mat'l	Ends	Fins
	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Lbs./In.	N/mm	Inches	mm				
TA-2375	0.375	9.53	0.625	15.88	0.305	7.75	1	25.4	0.035	0.89	3.9	0.68	0.16	4.06	6.75	SST	CG	N
TA-2522	0.375	9.53	0.625	15.88	0.337	8.56	0.45	11.43	0.019	0.48	1.1	0.19	0.04	1.02	3.5	MW	C	N
TA-2278	0.375	9.53	0.687	17.45	0.215	5.46	0.31	7.87	0.08	2.03	427.9	74.94	0.12	3.05	3.5	SPR	CG	Z
TA-2325	0.375	9.53	0.687	17.45	0.211	5.36	0.38	9.65	0.082	2.08	718	125.74	0.17	4.32	3	SPR	C	B0
TA-2345	0.375	9.53	0.687	17.45	0.275	6.99	0.75	19.05	0.05	1.27	17.9	3.13	0.32	8.13	6.5	SPR	C	N
TA-2256	0.375	9.53	0.875	22.23	0.311	7.9	1.38	35.05	0.032	0.81	1.1	0.19	0.07	1.78	7.5	SST	C	N
TA-2297	0.375	9.53	0.875	22.23	0.315	8	1.94	49.28	0.03	0.76	1.2	0.21	0.06	1.52	6.5	SPR	C	Z
TA-2240	0.375	9.53	0.953	24.21	0.273	6.93	1.75	44.45	0.051	1.3	8.4	1.47	0.08	2.03	7	SPR	CG	N
TA-2328	0.375	9.53	1.375	34.93	0.251	6.38	1.13	28.7	0.0625	1.59	13.8	2.42	0.063	1.6	4.5	SST	C	N
TA-2397	0.384	9.75	0.5	12.7	0.292	7.42	1.31	33.27	0.046	1.17	13	2.28	0.46	11.68	10	SPR	CG	N
TA-2299	0.391	9.93	0.75	19.05	0.285	7.24	0.56	14.22	0.053	1.35	40.9	7.16	0.11	2.79	4	SPR	C	N
TA-2533	0.4	10.16	0.56	14.22	0.364	9.25	0.56	14.22	0.018	0.46	0.3	0.05	0.12	3.05	7.5	SPR	C	N
TA-2535	0.4	10.16	0.56	14.22	0.366	9.3	0.5	12.7	0.017	0.43	0.2	0.04	0.09	2.29	7.25	MW	C	N
TA-2409	0.4	10.16	1.47	37.34	0.334	8.48	1.78	45.21	0.033	0.84	0.3	0.05	0.07	1.78	9	SST	C	N
TA-2283	0.406	10.31	0.5	12.7	0.326	8.28	2.88	73.15	0.04	1.02	2.6	0.46	0.88	22.35	22	SPR	CG	Z
TA-2150	0.406	10.31	0.562	14.27	0.37	9.4	0.38	9.65	0.018	0.46	0.7	0.12	0.04	1.02	4	SST	C	N
TA-2182	0.406	10.31	0.578	14.68	0.306	7.77	0.75	19.05	0.05	1.27	34.7	6.08	0.28	7.11	5	SPR	CG	Z
TA-2242	0.406	10.31	0.578	14.68	0.328	8.33	0.38	9.65	0.039	0.99	35.8	6.27	0.08	2.03	3	SPR	C	Z
TA-2089	0.406	10.31	0.625	15.88	0.346	8.79	0.44	11.18	0.03	0.76	5.9	1.03	0.06	1.52	3.5	SST	C	N
TA-2368	0.406	10.31	0.625	15.88	0.344	8.74	0.69	17.53	0.031	0.79	4.5	0.79	0.07	1.78	4.25	SST	C	N
TA-2384	0.406	10.31	0.625	15.88	0.342	8.69	0.81	20.57	0.032	0.81	4.6	0.81	0.06	1.52	4.5	SST	C	N
TA-2211	0.406	10.31	0.687	17.45	0.322	8.18	1	25.4	0.042	1.07	5.8	1.02	0.34	8.64	8	SPR	C	GI
TA-2185	0.406	10.31	0.796	20.22	0.342	8.69	1.25	31.75	0.032	0.81	1.4	0.25	0.06	1.52	7.75	SPR	C	GI
TA-2172	0.406	10.31	0.812	20.62	0.346	8.79	1	25.4	0.03	0.76	1.3	0.23	0.03	0.76	6	SST	C	N
TA-2243	0.406	10.31	1.219	30.96	0.298	7.57	2.38	60.45	0.054	1.37	4.2	0.74	0.11	2.79	7.75	SST	C	N
TA-2402	0.42	10.67	0.56	14.22	0.382	9.7	2.3	58.42	0.019	0.48	0.2	0.04	0.22	5.59	11	SPR	C	GI
TA-2149	0.421	10.69	0.75	19.05	0.341	8.66	0.63	16	0.04	1.02	13	2.28	0.08	2.03	3.75	SPR	C	Z
TA-2320	0.421	10.69	0.75	19.05	0.345	8.76	0.69	17.53	0.038	0.97	4	0.7	0.11	2.79	6	SST	C	N
TA-2272	0.421	10.69	0.938	23.83	0.337	8.56	1.88	47.75	0.042	1.07	2.5	0.44	0.09	2.29	8	SST	C	N
TA-2079	0.438	11.13	0.562	14.27	0.358	9.09	0.88	22.35	0.04	1.02	4.4	0.77	0.41	10.41	9.5	SST	C	N
TA-2339	0.438	11.13	0.562	14.27	0.404	10.26	0.88	22.35	0.017	0.43	0.2	0.04	0.04	1.02	6.75	SST	C	N
TA-2160	0.438	11.13	0.671	17.04	0.376	9.55	0.78	19.81	0.031	0.79	1.6	0.28	0.17	4.32	7	SST	C	N
TA-2268	0.438	11.13	0.718	18.24	0.376	9.55	0.63	16	0.031	0.79	3.5	0.61	0.04	1.02	4	SST	C	N
TA-2111	0.438	11.13	0.75	19.05	0.38	9.65	0.81	20.57	0.029	0.74	1.6	0.28	0.06	1.52	5.5	SPR	C	Z
TA-2304	0.438	11.13	0.75	19.05	0.386	9.8	0.38	9.65	0.026	0.66	0.6	0.11	0.05	1.27	8	SPR	C	N
TA-2081	0.438	11.13	0.812	20.62	0.368	9.35	1	25.4	0.035	0.89	2.3	0.4	0.07	1.78	6.5	SPR	C	Z
TA-2170	0.438	11.13	0.938	23.83	0.354	8.99	2	50.8	0.042	1.07	2.4	0.42	0.16	4.06	8	SST	C	N
TA-2263	0.438	11.13	1.125	28.58	0.34	8.64	0.88	22.35	0.05	1.27	9.2	1.61	0.1	2.54	4.5	SPR	C	Z
TA-2265	0.453	11.51	0.5	12.7	0.387	9.83	0.44	11.18	0.033	0.84	6.8	1.19	0.18	4.57	4.5	SST	C	N
TA-2127	0.453	11.51	0.609	15.47	0.345	8.76	1.13	28.7	0.054	1.37	30.1	5.27	0.32	8.13	5.25	SST	C	N
TA-2292	0.468	11.89	0.531	13.49	0.448	11.38	0.38	9.65	0.01	0.25	0.025	0.004	0.06	1.52	6.25	SST	C	N
TA-2379	0.468	11.89	0.531	13.49	0.428	10.87	1.13	28.7	0.02	0.51	0.4	0.07	0.15	3.81	6.5	SST	C	N
TA-2077	0.468	11.89	0.609	15.47	0.406	10.31	0.75	19.05	0.031	0.79	1.3	0.23	0.3	7.62	8.75	SST	C	N
TA-2381	0.468	11.89	0.609	15.47	0.364	9.25	1.13	28.7	0.052	1.32	24.4	4.27	0.31	7.87	5.25	SST	C	N
TA-2378	0.468	11.89	0.625	15.88	0.432	10.97	1.38	35.05	0.018	0.46	0.1	0.02	0.19	4.83	10.8	SST	C	N
TA-2298	0.468	11.89	0.797	20.24	0.324	8.23	1.38	35.05	0.072	1.83	31.8	5.57	0.62	15.75	8	SST	C	N
TA-2526	0.47	11.94	0.604	15.34	0.434	11.02	1.5	38.1	0.018	0.46	0.1	0.02	0.2	5.08	11	SST	C	N
TA-2159	0.484	12.29	0.546	13.87	0.424	10.77	0.56	14.22	0.03	0.76	5.1	0.89	0.14	3.56	4	SPR	C	N
TA-2362	0.5	12.7	0.562	14.27	0.404	10.26	0.63	16	0.048	1.22	22.6	3.96	0.24	6.1	5	SPR	CG	Z
TA-2341	0.5	12.7	0.625	15.88	0.412	10.46	1.38	35.05	0.044	1.12	8.1	1.42	0.34	8.64	6.75	SPR	C	Z
TA-2363	0.5	12.7	0.625	15.88	0.41	10.41	1.38	35.05	0.045	1.14	8.5	1.49	0.36	9.14	7	SPR	C	Z
TA-2228	0.5	12.7	0.641	16.28	0.44	11.18	1.13	28.7	0.03	0.76	0.8	0.14	0.3	7.62	10	SST	C	N
TA-2065	0.5	12.7	0.687	17.45	0.448	11.38	0.94	23.88	0.026	0.66	0.8	0.14	0.06	1.52	6	SST	C	N
TA-2067	0.5	12.7	0.687	17.45	0.438	11.13	0.81	20.57	0.031	0.79	2.2	0.39	0.07	1.78	5	SST	C	N
TA-2074	0.5	12.7	0.687	17.45	0.436	11.07	0.81	20.57	0.032	0.81	2.8	0.49	0.12	3.05	5	SPR	C	N
TA-2099	0.5	12.7	0.687	17.45	0.38	9.65	0.69	17.53	0.06	1.52	40.9	7.16	0.28	7.11	5	SPR	CG	Z
TA-2098	0.5	12.7	0.75	19.05	0.43	10.92	0.5	12.7	0.035	0.89	3.7	0.65	0.05	1.27	4.5	SST	C	N
TA-2226	0.5	12.7	0.75	19.05	0.376	9.55	0.44	11.18	0.0625	1.59	207	36.25	0.063	1.6	2.5	SST	C	N
TA-2233	0.5	12.7	0.75	19.05	0.462	11.73	1.06	26.92	0.019	0.48	0.2	0.04	0.02	0.51	5.5	SST	C	Z
TA-2102	0.5	12.7	0.812	20.62	0.406	10.31	0.88	22.35	0.047	1.19	10.4	1.82	0.1	2.54	5	SPR	C	Z
TA-2142	0.5	12.7	0.875	22.23	0.376	9.55	2	50.8	0.062	1.57	9.1	1.59	0.69	17.53	11.5	SPR	CG	Z
TA-2382																		



Tapered Springs

Century Stock Number	Sm. O.D.		Lg. O.D.		Sm. I.D.		Free Length Inches mm	Wire Dia. Inches mm	Average rate Lbs./In. N/mm	Solid Height Inches mm	Total Coils	Mat'l	Ends	Finish	
	Inches	mm	Inches	mm	Inches	mm									
TA-2125	0.531	13.49	0.687	17.45	0.473	12.01	0.28	7.11	0.029	0.74	2.3	0.4	0.06	1.52	4
TA-2096	0.531	13.49	0.703	17.86	0.463	11.76	0.31	7.87	0.034	0.86	4.8	0.84	0.04	1.02	3.75
TA-2179	0.531	13.49	1.265	32.13	0.411	10.44	1	25.4	0.06	1.52	9.2	1.61	0.12	3.05	5
TA-2404	0.54	13.72	1.109	28.17	0.452	11.48	2.32	58.93	0.044	1.12	2.5	0.44	0.09	2.29	6.5
TA-2186	0.546	13.87	0.687	17.45	0.386	9.8	1.44	36.58	0.08	2.03	61	10.68	0.66	16.76	8.25
TA-2199	0.546	13.87	0.859	21.82	0.422	10.72	1.81	45.97	0.0625	1.59	10	1.75	0.534	13.56	9
TA-2532	0.55	13.97	0.74	18.8	0.416	10.57	1.13	28.7	0.067	1.7	43.5	7.62	0.31	7.87	5
TA-2287	0.562	14.27	0.61	15.49	0.522	13.26	0.5	12.7	0.02	0.51	0.2	0.04	0.17	4.32	7.5
TA-2203	0.562	14.27	0.656	16.66	0.438	11.13	0.75	19.05	0.062	1.57	51.9	9.09	0.34	8.64	4.5
TA-2305	0.562	14.27	0.688	17.48	0.402	10.21	1.5	38.1	0.08	2.03	60.6	10.61	0.72	18.29	8
TA-2166	0.562	14.27	0.734	18.64	0.454	11.53	0.36	9.14	0.054	1.37	22.5	3.94	0.2	5.08	4.25
TA-2131	0.562	14.27	0.75	19.05	0.352	8.94	1.75	44.45	0.105	2.67	99.5	17.43	1.31	33.27	12.5
TA-2329	0.562	14.27	0.859	21.82	0.442	11.23	0.44	11.18	0.06	1.52	67.7	11.86	0.09	2.29	3
TA-2347	0.562	14.27	0.938	23.83	0.454	11.53	0.63	16	0.054	1.37	20.7	3.63	0.08	2.03	3.75
TA-2220	0.562	14.27	1	25.4	0.514	13.06	0.41	10.41	0.024	0.61	0.6	0.11	0.04	1.02	3.5
TA-2180	0.562	14.27	1.15	29.21	0.468	11.89	2.38	60.45	0.047	1.19	2.6	0.46	0.94	23.88	6.5
TA-2357	0.562	14.27	1.25	31.75	0.506	12.85	0.69	17.53	0.028	0.71	0.6	0.11	0.04	1.02	4
TA-2303	0.562	14.27	1.75	44.45	0.402	10.21	0.5	12.7	0.08	2.03	18.9	3.31	0.12	3.05	4.5
TA-2124	0.578	14.68	0.687	17.45	0.434	11.02	0.31	7.87	0.072	1.83	190.8	33.42	0.19	4.83	3
TA-2087	0.578	14.68	0.843	21.41	0.498	12.65	0.44	11.18	0.04	1.02	8.1	1.42	0.06	1.52	3.5
TA-2115	0.578	14.68	0.906	23.01	0.396	10.06	1.31	33.27	0.091	2.31	71.5	12.52	0.61	15.49	7
TA-2062	0.593	15.06	0.796	20.22	0.489	12.42	2.19	55.63	0.052	1.32	6.1	1.07	0.43	10.92	8.5
TA-2157	0.593	15.06	0.938	23.83	0.503	12.78	0.63	16	0.045	1.14	7.8	1.37	0.05	1.27	3.75
TA-2189	0.625	15.88	0.75	19.05	0.517	13.13	0.88	22.35	0.054	1.37	12.8	2.24	0.36	9.14	5.75
TA-2254	0.625	15.88	0.781	19.84	0.481	12.22	0.63	16	0.072	1.83	66.9	11.72	0.27	6.86	4
TA-2276	0.625	15.88	0.938	23.83	0.555	14.1	0.94	23.88	0.035	0.89	2	0.35	0.05	1.27	4.25
TA-2358	0.625	15.88	1.062	26.97	0.525	13.34	0.56	14.22	0.05	1.27	8.9	1.56	0.06	1.52	3.75
TA-2259	0.625	15.88	1.25	31.75	0.57	14.48	3.5	88.9	0.03	0.76	0.3	0.05	0.05	1.27	7.25
TA-2324	0.625	15.88	1.25	31.75	0.565	14.35	0.56	14.22	0.03	0.76	0.7	0.12	0.05	1.27	4
TA-2282	0.625	15.88	1.438	36.53	0.53	13.46	0.81	20.57	0.05	1.27	4.8	0.84	0.08	2.03	4
TA-2266	0.625	15.88	1.671	42.44	0.47	11.94	1.75	44.45	0.08	2.03	13.8	2.42	0.12	3.05	5.5
TA-2524	0.637	16.18	0.859	21.82	0.485	12.32	2.92	74.17	0.076	1.93	15.4	2.7	0.93	23.62	12.3
TA-2128	0.64	16.26	1	25.4	0.45	11.43	1.5	38.1	0.095	2.41	61.5	10.77	0.64	16.26	7
TA-2417	0.66	16.76	0.81	20.57	0.5	12.7	1.31	33.27	0.08	2.03	49.3	8.63	0.58	14.73	6.25
TA-2190	0.681	17.3	1	25.4	0.611	15.52	0.75	19.05	0.035	0.89	1.4	0.25	0.04	1.02	4.5
TA-2151	0.687	17.45	0.812	20.62	0.625	15.88	1.44	36.58	0.031	0.79	1	0.18	0.34	8.64	5
TA-2344	0.687	17.45	0.938	23.83	0.595	15.11	1	25.4	0.046	1.17	3.6	0.63	0.14	3.56	5.5
TA-2076	0.687	17.45	0.968	24.59	0.611	15.52	0.56	14.22	0.038	0.97	3	0.53	0.06	1.52	3.75
TA-2205	0.687	17.45	1.687	42.85	0.603	15.32	1.75	44.45	0.042	1.07	0.7	0.12	0.06	1.52	6
TA-2217	0.687	17.45	1.703	43.26	0.593	15.06	1.5	38.1	0.047	1.19	2.7	0.47	0.07	1.78	3.5
TA-2403	0.7	17.78	1.25	31.75	0.632	16.05	0.62	15.75	0.034	0.86	1	0.18	0.05	1.27	4
TA-2069	0.703	17.86	0.969	24.61	0.627	15.93	0.5	12.7	0.038	0.97	3.4	0.6	0.06	1.52	3.5
TA-2408	0.71	18.03	1.23	31.24	0.644	16.36	0.58	14.73	0.033	0.84	0.9	0.16	0.05	1.27	4
TA-2235	0.718	18.24	0.812	20.62	0.658	16.71	1.5	38.1	0.03	0.76	0.9	0.16	0.17	4.32	5
TA-2169	0.718	18.24	0.859	21.82	0.638	16.21	1	25.4	0.04	1.02	4.4	0.77	0.16	4.06	4
TA-2113	0.718	18.24	0.984	24.99	0.65	16.51	0.63	16	0.034	0.86	1.2	0.21	0.05	1.27	4.5
TA-2206	0.718	18.24	1.218	30.94	0.652	16.56	0.59	14.99	0.033	0.84	0.9	0.16	0.05	1.27	4
TA-2369	0.719	18.26	0.968	24.59	0.611	15.52	1	25.4	0.054	1.37	9.9	1.73	0.16	4.06	4.5
TA-2399	0.72	18.29	1.25	31.75	0.652	16.56	0.66	16.76	0.034	0.86	1	0.18	0.05	1.27	4
TA-2164	0.734	18.64	0.812	20.62	0.672	17.07	1.31	33.27	0.031	0.79	0.9	0.16	0.18	4.57	5
TA-2095	0.734	18.64	1.14	28.96	0.64	16.26	0.81	20.57	0.047	1.19	2.9	0.51	0.07	1.78	5
TA-2330	0.75	19.05	0.938	23.83	0.672	17.07	0.56	14.22	0.039	0.99	5.5	0.96	0.04	1.02	3
TA-2181	0.75	19.05	1.234	31.34	0.67	17.02	0.25	6.35	0.04	1.02	5	0.88	0.06	1.52	2.75
TA-2207	0.75	19.05	1.421	36.09	0.686	17.42	0.5	12.7	0.032	0.81	1.3	0.23	0.05	1.27	3
TA-2214	0.75	19.05	2.187	55.55	0.59	14.99	2.5	63.5	0.08	2.03	2.4	0.42	0.12	3.05	10
TA-2395	0.79	20.07	0.87	22.1	0.69	17.53	0.68	17.27	0.05	1.27	16.5	2.89	0.18	4.57	3
TA-2284	0.796	20.22	1.078	27.38	0.636	16.15	2.63	66.8	0.08	2.03	13.4	2.35	0.71	18.03	9
TA-2156	0.796	20.22	1.125	28.58	0.704	17.88	2.38	60.45	0.046	1.17	1.6	0.28	0.13	3.3	6.5
TA-2389	0.8	20.32	0.96	24.38	0.56	14.22	1	25.4	0.12	3.05	226.3	39.63	0.59	14.99	5
TA-2416	0.8	20.32	1.06	26.92	0.684	17.37	1.41	35.81	0.058	1.47	12.3	2.15	0.09	2.29	4
TA-2195	0.812	20.62	1.125	28.58	0.676	17.17	2.75	69.85	0.068	1.73	7.3	1.28	0.51	12.95	7
TA-2385	0.812	20.62	1.593	40.46	0.602	15.29	2.88	73.15	0.105	2.67	25.8	4.52	0.59	14.99	7.13
TA-2184	0.812	20.62	1.656	42.06	0.712	18.08	0.44	11.18	0.05	1.27	2.7	0.47	0.08	2.03	4
TA-2136	0.828	21.03	1.312	33.32	0.704	17.88	1.5	38.1	0.0625	1.59	4	0.7	0.331	8.41	6.5
TA-2173	0.828	21.03	1.734	44.04	0.73	18.54	0.5	12.7	0.05	1.27	2.4	0.42	0.08	2.03	4
TA-2376	0.84	21.34	1.125	28.58	0.71	18.03	1.56	39.62	0.065	1.65	6.1	1.07	0.41	10.41	6.75
TA-2117	0.843	21.41	0.968	24.59	0.643	16.33	2	50.8	0.1	2.54	34.4	6.02	1	25.4	10
TA-2380	0.843	21.41	1.25	31.75	0.743	18.87	1	25.4	0.05	1.27	5.				



Century Spring

Tapered Springs

Tapered Springs

Century Stock Number	Sm. O.D.		Lg. O.D.		Sm. I.D.		Free Length Inches	Wire Dia. Inches	Average rate Lbs./In. N/mm	Solid Height Inches mm	Total Coils	Mat'l	Ends	Finish	
	Inches	mm	Inches	mm	Inches	mm									
TA-2373	0.984	24.99	1.531	38.89	0.688	17.48	1.5	38.1	168.3 29.47	0.65 16.51	5	SPR	CG	Z	
TA-2192	0.984	24.99	1.796	45.62	0.734	18.64	4.5	114.3	0.125 3.18	23.2 4.06	0.96 24.38	8.5	SST	CG	N
TA-2063	1	25.4	1.25	31.75	0.76	19.3	1.81	45.97	0.12 3.05	58.7 10.28	0.83 21.08	7	SPR	CG	Z
TA-2300	1	25.4	1.25	31.75	0.814	20.68	2.13	54.1	0.093 2.36	13.1 2.29	0.78 19.81	8.5	SST	CG	N
TA-2528	1	25.4	1.41	35.81	0.9	22.86	2.34	59.44	0.05 1.27	1.5 1.27	0.08 2.03	6	SPR	C	N
TA-2121	1	25.4	1.5	38.1	0.9	22.86	2	50.8	0.05 1.27	1.1 1.19	0.15 3.81	6	SST	C	N
TA-2245	1	25.4	1.5	38.1	0.76	19.3	2.52	64.01	0.12 3.05	30.1 5.27	1.03 26.16	8.88	SPR	CG	Z
TA-2246	1	25.4	1.5	38.1	0.76	19.3	2.5	63.5	0.12 3.05	25.8 4.52	1.17 29.72	10	SPR	CG	Z
TA-2525	1	25.4	1.6	40.64	0.76	19.3	1.88	47.75	0.12 3.05	33 5.78	0.95 24.13	7.5	SPR	C	Z
TA-2348	1	25.4	1.875	47.63	0.84	21.34	3.13	79.5	0.08 2.03	4.8 0.84	0.12 3.05	6.25	SST	C	N
TA-2386	1.015	25.78	1.25	31.75	0.775	19.69	1.81	45.97	0.12 3.05	57.4 10.05	0.83 21.08	7	HD	CG	Z
TA-2105	1.031	26.19	1.281	32.54	0.937	23.8	2.75	69.85	0.047 1.19	0.5 0.09	0.53 13.46	10.5	SST	C	N
TA-2083	1.031	26.19	1.468	37.29	0.803	20.4	1	25.4	0.114 2.9	110.6 19.37	0.18 4.57	3.5	SPR	CG	N
TA-2331	1.031	26.19	1.468	37.29	0.807	20.5	1	25.4	0.112 2.84	66.8 11.7	0.28 7.11	4	SST	CG	N
TA-2072	1.031	26.19	1.75	44.45	0.937	23.8	2.25	57.15	0.047 1.19	0.5 0.09	0.07 1.78	7	SST	C	N
TA-2335	1.062	26.97	1.25	31.75	0.96	24.38	0.75	19.05	0.051 1.3	6.3 1.1	0.08 2.03	3	SST	C	N
TA-2261	1.062	26.97	1.375	34.93	0.792	20.12	5.16	131.06	0.135 3.43	50.1 8.77	1.27 32.26	9.5	SPR	CG	Z
TA-2216	1.062	26.97	1.781	45.24	0.88	22.35	0.94	23.88	0.091 2.31	20.9 3.66	0.14 3.56	4	SPR	C	N
TA-2410	1.07	27.18	1.78	45.21	0.892	22.66	0.87	22.1	0.089 2.26	20.2 3.54	0.14 3.56	3.88	SPR	C	N
TA-2134	1.078	27.38	1.906	48.41	0.808	20.52	4.13	104.9	0.135 3.43	22.9 4.01	1.16 29.46	9.25	SST	CG	N
TA-2262	1.093	27.76	1.7	43.18	0.911	23.14	1.88	47.75	0.091 2.31	7.5 1.31	0.63 16	7.88	SPR	CG	Z
TA-2350	1.125	28.58	1.359	34.52	0.855	21.72	3.5	88.9	0.135 3.43	33.5 5.87	1.82 46.23	12.5	SPR	C	Z
TA-2244	1.125	28.58	1.438	36.53	1.001	25.43	0.75	19.05	0.0625 1.59	6.8 1.19	0.063 1.6	3.5	SST	C	N
TA-2260	1.125	28.58	1.906	48.41	0.829	21.06	3.5	88.9	0.148 3.76	36.1 6.32	1.17 29.72	8.5	SST	CG	N
TA-2078	1.14	28.96	1.765	44.83	1.02	25.91	1.75	44.45	0.06 1.52	1.2 0.21	0.09 2.29	7	SST	C	N
TA-2371	1.156	29.36	1.468	37.29	1.048	26.62	1.94	49.28	0.054 1.37	2.4 0.42	0.08 2.03	4.25	SST	C	N
TA-2177	1.156	29.36	1.625	41.28	0.972	24.69	0.75	19.05	0.092 2.34	40.9 7.16	0.14 3.56	3	SST	CG	N
TA-2109	1.218	30.94	1.468	37.29	1.068	27.13	1.88	47.75	0.075 1.91	6 1.05	0.4 10.16	5.75	SPR	CG	N
TA-2215	1.25	31.75	1.375	34.93	1.01	25.65	3	76.2	0.12 3.05	23.5 4.12	1.02 25.91	8.5	SST	CG	N
TA-2066	1.25	31.75	1.5	38.1	0.98	24.89	2.25	57.15	0.135 3.43	36.3 6.36	1.07 27.18	8	SST	CG	N
TA-2210	1.25	31.75	1.821	46.25	1.15	29.21	3.25	82.55	0.05 1.27	0.8 0.14	0.08 2.03	5	SST	C	N
TA-2161	1.312	33.32	1.968	49.99	1.016	25.81	4	101.6	0.148 3.76	36.1 6.32	0.96 24.38	7	SST	CG	N
TA-2208	1.312	33.32	2.75	69.85	1.092	27.74	6.38	162.05	0.11 2.79	3.7 0.65	0.84 21.34	10	SPR	C	Z
TA-2223	1.421	36.09	2.5	63.5	1.125	28.58	6	152.4	0.148 3.76	16 2.8	1.23 31.24	9.25	SPR	CG	N
TA-2346	1.453	36.91	1.687	42.85	1.235	31.37	7.5	190.5	0.109 2.77	7.5 1.31	1.14 28.96	9.5	SST	C	N
TA-2163	1.484	37.69	1.812	46.02	1.32	33.53	2.25	57.15	0.082 2.08	4.8 0.84	0.48 12.19	5.5	SPR	C	N
TA-2146	1.484	37.69	2.969	75.41	1.264	32.11	5.75	146.05	0.11 2.79	3 0.53	0.58 14.73	9.5	SPR	CG	Z
TA-2118	1.5	38.1	1.812	46.02	1.276	32.41	2.06	52.32	0.112 2.84	21.4 3.75	0.49 12.45	4.5	SST	CG	N
TA-2290	1.5	38.1	1.812	46.02	1.256	31.9	2.25	57.15	0.122 3.1	39.2 6.87	0.59 14.99	4.25	SPR	C	Z
TA-2267	1.562	39.67	1.875	47.63	1.336	33.93	1.63	41.4	0.113 2.87	22.7 3.98	0.58 14.73	4.5	SPR	C	Z
TA-2356	1.625	41.28	2.375	60.33	1.265	32.13	8	203.2	0.18 4.57	22.3 3.91	2.09 53.09	11.8	SST	CG	N
TA-2337	1.75	44.45	2.5	63.5	1.48	37.59	3.5	88.9	0.135 3.43	17.6 3.08	0.43 10.92	5	SST	CG	N
TA-2360	1.75	44.45	5.5	139.7	1.314	33.38	8.5	215.9	0.218 5.54	16.4 2.87	1.75 44.45	7	SPR	C	Z
TA-2162	1.859	47.22	2.375	60.33	1.563	39.7	3.5	88.9	0.148 3.76	17.5 3.06	0.22 5.59	6.5	SST	CG	N
TA-2138	1.906	48.41	2.438	61.93	1.532	38.91	3	76.2	0.187 4.75	39.1 6.85	1.27 32.26	7	SST	CG	N
TA-2225	1.938	49.23	2.25	57.15	1.81	45.97	1.5	38.1	0.064 1.63	1.7 0.3	0.29 7.37	3.5	SST	C	N
TA-2209	2	50.8	2.5	63.5	1.84	46.74	1.75	44.45	0.08 2.03	1.9 0.33	0.12 3.05	5	SPR	C	Z
TA-2114	2	50.8	3.625	92.08	1.586	40.28	8.75	222.25	0.207 5.26	20 3.5	1.49 37.85	8.5	SST	CG	N
TA-2112	2.031	51.59	2.625	66.68	1.707	43.36	2.94	74.68	0.162 4.11	24.2 4.24	0.77 19.56	5.5	SST	C	N
TA-2365	2.125	53.98	2.938	74.63	2.017	51.23	2.75	69.85	0.054 1.37	0.3 0.05	0.08 2.03	4.5	SST	C	N
TA-2401	2.25	57.15	4.78	121.41	1.686	42.82	5.5	139.7	0.282 7.16	53.8 9.42	1.5 38.1	7	SPR	C	N
TA-2196	2.625	66.68	3.5	88.9	1.87	47.5	6.5	165.1	0.375 9.53	214.2 37.51	3.5 88.9	8.7	SPR	CG	Z
TA-2144	2.656	67.46	2.922	74.22	2.036	51.71	7.63	193.8	0.31 7.87	96.8 16.95	3.4 86.36	11	SPR	CG	Z
TA-2193	3.5	88.9	4.375	111.13	2.74	69.6	10.8	274.32	0.38 9.65	74 12.96	4.17 105.92	11	SPR	CG	Z

ENDS C Closed
CG Closed & Ground
O Open

MATERIAL MW SPR PB

Music Wire
Spring Steel
Phosphor-Bronze

HD SST

Hard Drawn


Stainless Steel

FINISH BO GI

Black Oxide
Gold Iridite


N Z

None
Zinc



Constant Rate Tapered Springs

Century Stock Number	Sm. O.D.		Lg. O.D.		APP. Free Length		Load @ 50% Free Length		Wire Dia.		Spring Rate		Wind Dir	Ends	Mat'L	Finish
	Inches	mm	Inches	mm	Inches	mm	Lbs.	N	Inches	mm	Lbs./In.	N/mm				
TA-7000S	0.125	3.18	0.36	9.14	0.25	6.35	3.45	15.35	0.029	0.74	27.58	4.83	RHW	C	302 SS	N
TA-7001S	0.156	3.96	0.42	10.67	0.38	9.65	2.5	11.13	0.029	0.74	13.35	2.34	RHW	C	302 SS	N
TA-7002S	0.187	4.75	0.42	10.67	0.31	7.87	2.26	10.06	0.029	0.74	14.48	2.54	RHW	C	302 SS	N
TA-7003S	0.218	5.54	0.42	10.67	0.25	6.35	2.04	9.08	0.029	0.74	16.38	2.87	RHW	C	302 SS	N
TA-7004S	0.156	3.96	0.42	10.67	0.31	7.87	3.63	16.15	0.032	0.81	23.25	4.07	RHW	C	302 SS	N
TA-7005S	0.187	4.75	0.42	10.67	0.25	6.35	3.19	14.20	0.032	0.81	25.49	4.46	RHW	C	302 SS	N
TA-7006S	0.187	4.75	0.42	10.67	0.25	6.35	5.09	22.65	0.035	0.89	40.8	7.15	RHW	C	302 SS	N
TA-7007S	0.187	4.75	0.48	12.19	0.63	16.00	2.15	9.57	0.029	0.74	6.88	1.20	RHW	C	302 SS	N
TA-7008S	0.218	5.54	0.48	12.19	0.5	12.70	1.93	8.59	0.029	0.74	7.7	1.35	RHW	C	302 SS	N
TA-7009S	0.25	6.35	0.48	12.19	0.38	9.65	1.59	7.08	0.029	0.74	8.5	1.49	RHW	C	302 SS	N
TA-7010S	0.281	7.14	0.48	12.19	0.31	7.87	1.53	6.81	0.029	0.74	9.79	1.71	RHW	C	302 SS	N
TA-7011S	0.156	3.96	0.48	12.19	0.63	16.00	3.42	15.22	0.032	0.81	10.93	1.91	RHW	C	302 SS	N
TA-7012S	0.187	4.75	0.48	12.19	0.5	12.70	2.88	12.82	0.032	0.81	11.51	2.02	RHW	C	302 SS	N
TA-7013S	0.218	5.54	0.48	12.19	0.38	9.65	2.56	11.39	0.032	0.81	13.63	2.39	RHW	C	302 SS	N
TA-7014S	0.25	6.35	0.48	12.19	0.31	7.87	2.37	10.55	0.032	0.81	15.21	2.66	RHW	C	302 SS	N
TA-7015S	0.187	4.75	0.48	12.19	0.38	9.65	3.92	17.44	0.035	0.89	20.91	3.66	RHW	C	302 SS	N
TA-7016S	0.218	5.54	0.48	12.19	0.31	7.87	3.48	15.49	0.035	0.89	22.26	3.90	RHW	C	302 SS	N
TA-7017S	0.187	4.75	0.48	12.19	0.31	7.87	5.02	22.34	0.038	0.97	32.13	5.63	RHW	C	302 SS	N
TA-7018S	0.218	5.54	0.48	12.19	0.25	6.35	4.75	21.14	0.038	0.97	38.02	6.66	RHW	C	302 SS	N
TA-7019S	0.312	7.92	0.6	15.24	1.25	31.75	1	4.45	0.026	0.66	1.61	0.28	RHW	C	302 SS	N
TA-7020S	0.343	8.71	0.6	15.24	1	25.40	0.84	3.74	0.026	0.66	1.67	0.29	RHW	C	302 SS	N
TA-7021S	0.375	9.53	0.6	15.24	0.75	19.05	0.73	3.25	0.026	0.66	1.94	0.34	RHW	C	302 SS	N
TA-7022S	0.25	6.35	0.6	15.24	1.25	31.75	1.56	6.94	0.029	0.74	2.49	0.44	RHW	C	302 SS	N
TA-7023S	0.281	7.14	0.6	15.24	1	25.40	1.39	6.19	0.029	0.74	2.77	0.49	RHW	C	302 SS	N
TA-7024S	0.343	8.71	0.6	15.24	0.75	19.05	1.18	5.25	0.029	0.74	3.16	0.55	RHW	C	302 SS	N
TA-7025S	0.375	9.53	0.6	15.24	0.63	16.00	1.12	4.98	0.029	0.74	3.57	0.63	RHW	C	302 SS	N
TA-7026S	0.281	7.14	0.6	15.24	0.75	19.05	1.8	8.01	0.032	0.81	4.81	0.84	RHW	C	302 SS	N
TA-7027S	0.343	8.71	0.6	15.24	0.63	16.00	1.64	7.30	0.032	0.81	5.25	0.92	RHW	C	302 SS	N
TA-7028S	0.375	9.53	0.6	15.24	0.5	12.70	1.53	6.81	0.032	0.81	6.13	1.07	RHW	C	302 SS	N
TA-7029S	0.218	5.54	0.6	15.24	0.75	19.05	2.72	12.10	0.035	0.89	7.25	1.27	RHW	C	302 SS	N
TA-7030S	0.281	7.14	0.6	15.24	0.63	16.00	2.41	10.72	0.035	0.89	7.7	1.35	RHW	C	302 SS	N
TA-7031S	0.312	7.92	0.6	15.24	0.5	12.70	2.16	9.61	0.035	0.89	8.64	1.51	RHW	C	302 SS	N
TA-7032S	0.25	6.35	0.6	15.24	0.63	16.00	3.57	15.89	0.038	0.97	11.42	2.00	RHW	C	302 SS	N
TA-7033S	0.281	7.14	0.6	15.24	0.5	12.70	3.22	14.33	0.038	0.97	12.88	2.26	RHW	C	302 SS	N
TA-7034S	0.312	7.92	0.6	15.24	0.38	9.65	2.62	11.66	0.038	0.97	13.99	2.45	RHW	C	302 SS	N
TA-7035S	0.218	5.54	0.6	15.24	0.63	16.00	4.56	20.29	0.04	1.02	14.59	2.56	RHW	C	302 SS	N
TA-7036S	0.25	6.35	0.6	15.24	0.5	12.70	4.07	18.11	0.04	1.02	16.28	2.85	RHW	C	302 SS	N
TA-7037S	0.312	7.92	0.6	15.24	0.38	9.65	3.56	15.84	0.04	1.02	18.98	3.32	RHW	C	302 SS	N
TA-7038S	0.218	5.54	0.6	15.24	0.5	12.70	5.13	22.83	0.042	1.07	20.49	3.59	RHW	C	302 SS	N
TA-7039S	0.281	7.14	0.6	15.24	0.38	9.65	4.35	19.36	0.042	1.07	23.19	4.06	RHW	C	302 SS	N
TA-7040S	0.25	6.35	0.6	15.24	0.38	9.65	6.09	27.10	0.045	1.14	32.49	5.69	RHW	C	302 SS	N
TA-7041S	0.343	8.71	0.72	18.29	1.25	31.75	2.04	9.08	0.035	0.89	3.27	0.57	RHW	C	302 SS	N
TA-7042S	0.375	9.53	0.72	18.29	1	25.40	1.8	8.01	0.035	0.89	3.59	0.63	RHW	C	302 SS	N
TA-7043S	0.438	11.13	0.72	18.29	0.75	19.05	1.62	7.21	0.035	0.89	4.33	0.76	RHW	C	302 SS	N
TA-7044S	0.281	7.14	0.72	18.29	1.25	31.75	2.99	13.31	0.038	0.97	4.78	0.84	RHW	C	302 SS	N
TA-7045S	0.343	8.71	0.72	18.29	1	25.40	2.64	11.75	0.038	0.97	5.29	0.93	RHW	C	302 SS	N
TA-7046S	0.375	9.53	0.72	18.29	0.75	19.05	2.19	9.75	0.038	0.97	5.84	1.02	RHW	C	302 SS	N
TA-7047S	0.438	11.13	0.72	18.29	0.63	16.00	2.1	9.35	0.038	0.97	6.72	1.18	RHW	C	302 SS	N
TA-7048S	0.281	7.14	0.72	18.29	1	25.40	3.31	14.73	0.04	1.02	6.61	1.16	RHW	C	302 SS	N
TA-7049S	0.343	8.71	0.72	18.29	0.75	19.05	2.76	12.28	0.04	1.02	7.35	1.29	RHW	C	302 SS	N
TA-7050S	0.375	9.53	0.72	18.29	0.63	16.00	2.45	10.90	0.04	1.02	7.84	1.37	RHW	C	302 SS	N
TA-7051S	0.438	11.13	0.72	18.29	0.5	12.70	2.37	10.55	0.04	1.02	9.47	1.66	RHW	C	302 SS	N
TA-7052S	0.281	7.14	0.72	18.29	1	25.40	4.19	18.65	0.042	1.07	8.37	1.47	RHW	C	302 SS	N
TA-7053S	0.343	8.71	0.72	18.29	0.75	19.05	3.44	15.31	0.042	1.07	9.17	1.61	RHW	C	302 SS	N
TA-7054S	0.375	9.53	0.72	18.29	0.63	16.00	3.25	14.46	0.042	1.07	10.39	1.82	RHW	C	302 SS	N
TA-7055S	0.281	7.14	0.72	18.29	0.75	19.05	4.83	21.49	0.045	1.14	12.87	2.25	RHW	C	302 SS	N
TA-7056S	0.343	8.71	0.72	18.29	0.63	16.00	4.35	19.36	0.045	1.14	13.91	2.44	RHW	C	302 SS	N
TA-7057S	0.375	9.53	0.72	18.29	0.5	12.70	3.89	17.31	0.045	1.14	15.55	2.72	RHW	C	302 SS	N
TA-7058S	0.281	7.14	0.72	18.29	0.63	16.00	6.46	28.75	0.049	1.24	20.67	3.62	RHW	C	302 SS	N
TA-7059S	0.343	8.71	0.72	18.29	0.5	12.70	5.73	25.50	0.049	1.24	22.92	4.01	RHW	C	302 SS	N
TA-7060S	0.375	9.53	0.72	18.29	0.38	9.65	4.84	21.54	0.049	1.24	25.82	4.52	RHW	C	302 SS	N
TA-7061S	0.281	7.14	0.72	18.29	0.5	12.70	10.12	45.03	0.055	1.40	40.5	7.09	RHW	C	302 SS	N
TA-7062S	0.312	7.92	0.72	18.29	0.38	9.65	8.34	37.11	0.055	1.40	44.49	7.79	RHW	C	302 SS	N
TA-7063S	0.343	8.71	0.85	21.59	1.5	38.10	3.08	13.71	0.042	1.07	4.11	0.72	RHW	C	302 SS	N
TA-7064S	0.375	9.53	0.85	21.59	1.25	31.75	2.7	12.02	0.042	1.07	4.32	0.76	RHW	C	302 SS	N
TA-7065S	0.438	11.13	0.85	21.59	1	25.40	2.35	10.46	0.042	1.07	4.71	0.82	RHW	C	302 SS	N
TA-7066S	0.56	14.22	0.85	21.59	0.75	19.05	2.36	10.50	0.042	1.07	6.28	1.10	RHW	C	302 SS	N
TA-7067S	0.343	8.71	0.85	21.59	1.5	38.10	4.19	18.65	0.045	1.14	5.59	0.98	RHW	C</td		



Century Spring


Constant Rate Tapered Springs

Century Stock Number	Sm. O.D.		Lg. O.D.		APP. Free Length		Load @ 50% Free Length		Wire Dia.		Spring Rate		Wind Dir	Ends	Mat'L	Finish
	Inches	mm	Inches	mm	Inches	mm	Lbs.	N	Inches	mm	Lbs./In.	N/mm				
TA-7075S	0.343	8.71	0.85	21.59	0.75	19.05	7.18	31.95	0.055	1.40	19.14	3.35	RHW	C	302 SS	N
TA-7076S	0.438	11.13	0.85	21.59	0.63	16.00	6.58	29.28	0.055	1.40	21.05	3.69	RHW	C	302 SS	N
TA-7077S	0.312	7.92	0.85	21.59	0.75	19.05	10	44.50	0.059	1.50	26.67	4.67	RHW	C	302 SS	N
TA-7078S	0.375	9.53	0.85	21.59	0.63	16.00	8.86	39.43	0.059	1.50	28.36	4.97	RHW	C	302 SS	N
TA-7079S	0.312	7.92	0.85	21.59	0.63	16.00	12.22	54.38	0.063	1.60	39.07	6.84	RHW	C	302 SS	N
TA-7080S	0.375	9.53	0.85	21.59	0.5	12.70	11.1	49.40	0.063	1.60	44.33	7.76	RHW	C	302 SS	N
TA-7081S	0.375	9.53	0.85	21.59	0.5	12.70	14.85	66.08	0.067	1.70	59.45	10.41	RHW	C	302 SS	N
TA-7082S	0.438	11.13	0.975	24.77	1.5	38.10	3.88	17.27	0.049	1.24	5.18	0.91	RHW	C	302 SS	N
TA-7083S	0.5	12.70	0.975	24.77	1.25	31.75	3.56	15.84	0.049	1.24	5.69	1.00	RHW	C	302 SS	N
TA-7084S	0.56	14.22	0.975	24.77	1	25.40	3.29	14.64	0.049	1.24	6.58	1.15	RHW	C	302 SS	N
TA-7085S	0.625	15.88	0.975	24.77	0.75	19.05	2.93	13.04	0.049	1.24	7.81	1.37	RHW	C	302 SS	N
TA-7086S	0.375	9.53	0.975	24.77	1.5	38.10	6.88	30.62	0.055	1.40	9.18	1.61	RHW	C	302 SS	N
TA-7087S	0.438	11.13	0.975	24.77	1.25	31.75	6.09	27.10	0.055	1.40	9.74	1.71	RHW	C	302 SS	N
TA-7088S	0.5	12.70	0.975	24.77	1	25.40	5.4	24.03	0.055	1.40	10.79	1.89	RHW	C	302 SS	N
TA-7089S	0.56	14.22	0.975	24.77	0.75	19.05	4.83	21.49	0.055	1.40	12.87	2.25	RHW	C	302 SS	N
TA-7090S	0.343	8.71	0.975	24.77	1.25	31.75	8.47	37.69	0.059	1.50	13.55	2.37	RHW	C	302 SS	N
TA-7091S	0.438	11.13	0.975	24.77	1	25.40	7.4	32.93	0.059	1.50	14.81	2.59	RHW	C	302 SS	N
TA-7092S	0.5	12.70	0.975	24.77	0.75	19.05	6.44	28.66	0.059	1.50	17.18	3.01	RHW	C	302 SS	N
TA-7093S	0.343	8.71	0.975	24.77	1	25.40	10.02	44.59	0.063	1.60	20.03	3.51	RHW	C	302 SS	N
TA-7094S	0.438	11.13	0.975	24.77	0.75	19.05	8.59	38.23	0.063	1.60	22.92	4.01	RHW	C	302 SS	N
TA-7095S	0.375	9.53	0.975	24.77	0.75	19.05	11.44	50.91	0.067	1.70	30.51	5.34	RHW	C	302 SS	N
TA-7096S	0.438	11.13	0.975	24.77	0.63	16.00	10.27	45.70	0.067	1.70	32.85	5.75	RHW	C	302 SS	N
TA-7097S	0.375	9.53	0.975	24.77	0.75	19.05	16.11	71.69	0.072	1.83	42.98	7.53	RHW	C	302 SS	N
TA-7098S	0.438	11.13	0.975	24.77	0.63	16.00	14.85	66.08	0.072	1.83	47.49	8.32	RHW	C	302 SS	N
TA-7099S	0.438	11.13	0.975	24.77	0.63	16.00	16.85	74.98	0.074	1.88	53.94	9.45	RHW	C	302 SS	N

Die Springs

Century Spring offers a complete line of die springs in both oil-tempered and chrome-alloy materials. Die springs are used primarily in die machinery. They are, however, well-suited for many applications where high- or shock-load stresses are required, or when maximum cycle-life is important.

Selecting a Die Spring

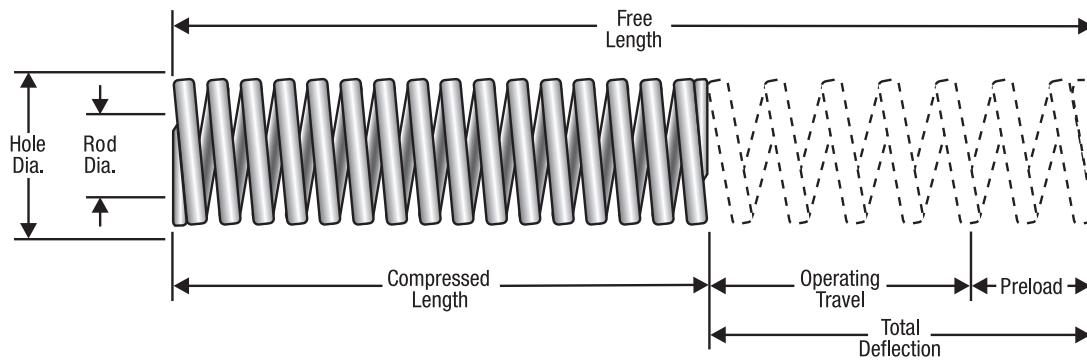

If the application is for a die set, always use as many springs as the die will accommodate to produce the required load and cause the least amount of deflection. This will increase the service-life and reduce the chances of early failure.

Decide if the springs will be used for short or long runs, average or high-frequency cycling, or high stress in order to select the duty-level capability found in the following pages of inventory.

The higher the rate of cycling, the higher the rate of fatigue-caused failures. In slow-oscillating dies or fixtures, it is possible to get good performance with springs operating near maximum deflection. As the working speed increases, the life expectancy of the spring at that deflection decreases.

NOTE: The suggested maximum deflections are expressed as percentages of free length. These guideline limits are important for extended service life.

Rate-Pounds Per Inch of Deflection

Hole Size	Rod Size	Free Length	LD (Blue)	MD (Red)	HD (Gold)	XHD (Green)
3/8"	3/16"	3"	18	30	42	65
1/2"	9/32"	3"	40	57	74	90
5/8"	11/32"	3"	56	100	144	180
3/4"	3/8"	3"	96	144	312	405
1"	1/2"	3"	152	232	544	736
1-1/4"	5/8"	3"	240	512	952	1184
1-1/2"	3/4"	3"	336	624	1224	2312
2	1"	3"	768	960	1856	3120
High Cycle Life Range % of Length			25% to 35%	20% to 25%	15% to 20%	15%
Suggested Maximum Deflection % of Length			50%	37%	30%	25%

This chart indicates how the load-carrying capability of the die spring increases by scanning through the color code range of the 3" long spring's increasing duty capability.

Spring Characteristics

Holes and Rod Diameter

The die spring containment hole diameter sizes tabulated in the following pages of inventory must be considered to eliminate possible spring-to-wall friction caused by heat, wear due to fabrication tolerances, and interference from the spring diameter growth due to compression. If the spring is long for its diameter, an internal supporting rod may be required to eliminate spring buckling.

Heat

Thermal effects are frequently ignored in spring failure or load-loss analysis. The maximum rated service temperature for chrome-alloy steel is about 440° F. The following table reflects the approximate load losses due to heat that can be expected with die springs.


Stress Determination

The die wire stress can be estimated with the rectangular wire equation:

$$S = \frac{PD}{bt\sqrt{bt}} \beta \quad (\text{p.s.i.})$$

Where:
P = Load, lbs.
D = Mean coil diameter, (O.D. - d) inches
b = Wire width (radially), inches
t = Wire thickness, inches
 β = Stress-correction factor, see below

Stress Factor β for rectangular wire (b and t as shown)

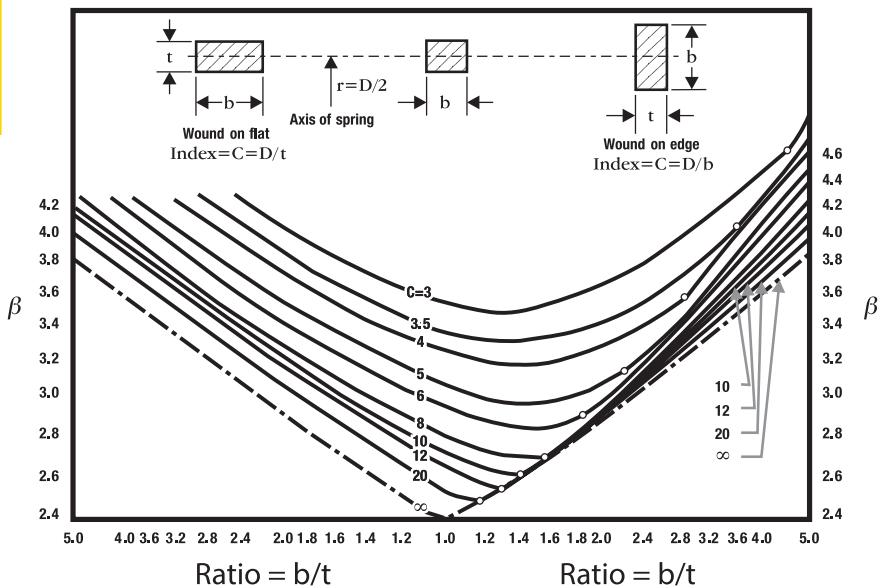

Load Loss Due to Temperature

Stress P.S.I.	Carbon Steel SAE-1070 Approximate Percent Loss of Load				Chrome Alloy Steel Approximate Percent Loss of Load				
	Degrees Fahrenheit				Degrees Fahrenheit				
	250	300	350	400	250	300	350	400	450
120,000	10	12	13	18	6	7	9	10	13
110,000	7	9	12	14	4	6	7	8	12
100,000	5	7	10	11	3	4	5	6	11
90,000	4	6	8	9	2	3	4	5	10
80,000	3	5	6	8	2	2	3	4	9
70,000	3	4	6	7	2	2	3	4	8
60,000	3	4	5	6	1	1	3	4	7
50,000	2	3	4	5	1	1	3	3	6
40,000	2	3	4	5	1	1	2	3	5

Material

All of our die springs are fabricated from the most efficient wire cross section, which is rectangular with rounded corners. The oil-tempered die springs are offered for die sets and general use at a reduced cost. A very long service life may be expected from oil-tempered springs if their maximum deflection is held to about 25 percent of their length. The highest grade of electrically-furnaced, shot-peened and preset chrome-alloy steel die springs are offered for unsurpassed quality.

Finish


Die springs of oil-tempered material are available as unfinished only. A color coding system is employed for our chrome-alloy line for instant visual identification of the spring's work range and to prevent errors in spring selection and installation. The color coding is a light coating of water-based paint.

Chrome Alloy

COLOR	RANGE
Blue	Light Duty
Red	Medium Duty
Gold	Heavy Duty
Green	Extra-Heavy Duty

Chrome Silicon


COLOR	RANGE
Green	Light Load
Blue	Medium Load
Red	Heavy Load
Yellow	Extra-Heavy Load

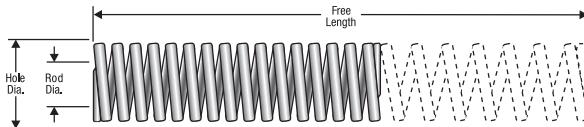

Die Springs MEDIUM-DUTY OIL TEMPERED

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Dia. Inches	Free Length Inches	Rate Lbs./In.	Approx. Maximum Deflection* 40% Of Free Length		Deflection For Average Life 25% Of Free Length	
						Force Lbs.	Defl. In.	Force Lbs.	Defl. In.
D-1				1	288	115	0.4	72	0.25
D-2				1.5	192	115	0.6	72	0.38
D-3	9/16	1/4		2	144	115	0.8	72	0.5
D-4				2.5	108	108	1	68	0.63
D-5	0.562	0.250	0.125 x 0.062	3	88	106	1.2	66	0.75
D-6				3.5	72	101	1.4	63	0.88
D-7				4	64	102	1.6	64	1
D-8				4.5	60	108	1.8	68	1.13
D-9				5	52	104	2	65	1.25
D-10				1	432	173	0.4	108	0.25
D-11				1.5	272	163	0.6	102	0.38
D-12				2	206	165	0.8	103	0.5
D-13	5/8	1/4		2.5	160	160	1	100	0.63
D-14				3	132	158	1.2	99	0.75
D-15	0.625	0.250	0.078 x 0.156	3.5	112	157	1.4	98	0.88
D-16				4	98	157	1.6	98	1
D-17				4.5	88	158	1.8	99	1.13
D-18				5	78	156	2	98	1.25
D-19				1	600	240	0.4	150	0.25
D-20				1.5	380	228	0.6	143	0.38
D-21				2	264	211	0.8	132	0.5
D-22				2.5	200	200	1	125	0.63
D-23	3/4	3/8		3	168	202	1.2	126	0.75
D-24				3.5	140	196	1.4	123	0.88
D-25	0.75	0.375	0.093 x 0.156	4	124	198	1.6	124	1
D-26				4.5	104	187	1.8	117	1.13
D-27				5	96	192	2	120	1.25
D-28				5.5	88	194	2.2	121	1.38
D-29				6	80	192	2.4	120	1.5
D-30				1	624	250	0.4	156	0.25
D-32				2	272	218	0.8	136	0.5
D-33				2.5	210	210	1	131	0.63
D-34				3	174	209	1.2	131	0.75
D-35	7/8	7/16		3.5	146	204	1.4	128	0.88
D-36				4	130	208	1.6	130	1
D-37	0.875	0.438	0.109 x 0.188	4.5	114	205	1.8	128	1.13
D-38				5	104	208	2	130	1.25
D-39				5.5	92	202	2.2	127	1.38
D-40				6	84	202	2.4	126	1.5
D-41				1	800	320	0.4	200	0.25
D-42				1.5	496	298	0.6	186	0.38
D-43				2	372	298	0.8	186	0.5
D-44				2.5	280	280	1	175	0.63
D-45				3	232	278	1.2	174	0.75
D-46	1	1/2		3.5	200	280	1.4	175	0.88
D-47				4	176	282	1.6	176	1
D-48	1.000	0.500	0.109 x 0.219	4.5	156	281	1.8	176	1.13
D-49				5	136	272	2	170	1.25
D-50				6	116	278	2.4	174	1.5
D-51				8	92	294	3.2	184	2
D-52				1	1440	576	0.4	360	0.25
D-53				1.5	896	538	0.6	336	0.38
D-54				2	552	442	0.8	276	0.5
D-55				2.5	448	448	1	280	0.63
D-56	1-1/16	1/2		3	376	451	1.2	282	0.75
D-57				3.5	312	437	1.4	273	0.88
D-58	1.062	0.5	0.250 x 0.125	4	272	435	1.6	272	1
D-59				4.5	240	432	1.8	270	1.13
D-60				5	208	416	2	260	1.25
D-61				6	176	422	2.4	264	1.5
D-62				8	128	410	3.2	256	2
D-63				9	112	403	3.6	252	2.25
D-64				10	100	400	4	250	2.5
D-65				1	1952	781	0.4	488	0.25
D-66				1.5	1168	701	0.6	438	0.38
D-67				2	800	640	0.8	400	0.5
D-68				2.5	648	648	1	405	0.63
D-69	1-1/8	9/16		3	536	643	1.2	402	0.75
D-70				3.5	432	605	1.4	378	0.88
D-71	1.125	0.562	0.250 x 0.156	4	368	589	1.6	368	1
D-72				4.5	328	590	1.8	369	1.13
D-73				5	280	560	2	350	1.25
D-74				6	232	557	2.4	348	1.5
D-75				8	168	538	3.2	336	2

* Loads near solid lengths for reference only; overstressed condition.

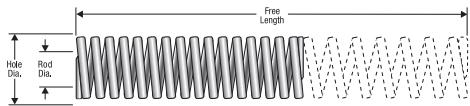

Century Spring

Die Springs MEDIUM-DUTY OIL TEMPERED

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Dia. Inches	Free Length Inches	Rate Lbs./In.	Approx. Maximum Deflection* 40% Of Free Length		Deflection For Average Life 25% Of Free Length	
						Force Lbs.	Defl. In.	Force Lbs.	Defl. In.
D-76				1.5	1440	864	0.6	540	0.38
D-77				2	1080	864	0.8	540	0.5
D-78				2.5	800	800	1	500	0.63
D-79				3	570	787	1.2	492	0.75
D-80				3.5	512	717	1.4	448	0.88
D-81	1-1/4	5/8		4	472	755	1.6	472	1
D-82				4.5	400	720	1.8	450	1.13
D-83	1.250	0.625	0.281 x 0.156	5	360	720	2	450	1.25
D-84				5.5	312	686	2.2	429	1.38
D-85				6	296	710	2.4	444	1.5
D-86				7	248	694	2.8	434	1.75
D-87				8	216	691	3.2	432	2
D-88				10	168	672	4	420	2.5
D-89				2	1200	960	0.8	600	0.5
D-90				2.5	912	912	1	570	0.63
D-91				3	736	883	1.2	552	0.75
D-92	1-1/2	3/4		3.5	624	874	1.4	546	0.88
D-93				4	528	845	1.6	528	1
D-94	1.5	0.75	0.312 x 0.188	4.5	472	850	1.8	531	1.13
D-95				5	408	816	2	510	1.25
D-96				6	344	826	2.4	516	1.5
D-97				8	256	819	3.2	512	2
D-98				10	200	800	4	500	2.5
D-99				2	1448	1158	0.8	724	0.5
D-100				2.5	1088	1088	1	680	0.63
D-101				3	896	1075	1.2	672	0.75
D-102	1-3/4	7/8		3.5	728	1019	1.4	637	0.88
D-103				4	608	973	1.6	608	1
D-104	1.75	0.875	0.375 x 0.188	4.5	544	979	1.8	612	1.13
D-105				5	488	976	2	610	1.25
D-106				6	400	960	2.4	600	1.5
D-107				8	288	922	3.2	576	2
D-108				10	232	928	4	580	2.5
D-109				2.5	1600	1600	1	1000	0.63
D-110				3	1240	1488	1.2	930	0.75
D-111				3.5	1016	1422	1.4	889	0.88
D-112				4	896	1434	1.6	896	1
D-113				4.5	800	1440	1.8	900	1.13
D-114	2	1		5	696	1392	2	870	1.25
D-115				5.5	640	1408	2.2	880	1.38
D-116	2	1	0.438 x 0.219	6	576	1382	2.4	864	1.5
D-117				6.5	500	1300	2.6	813	1.63
D-118				7	472	1322	2.8	826	1.75
D-119				8	424	1357	3.2	848	2
D-120				10	328	1312	4	820	2.5
D-121				12	272	1306	4.8	816	3


* Loads near solid lengths for reference only; overstressed condition.

Die Springs 36" LENGTH OIL TEMPERED

Century Stock Number	Hole Size Inches	Rod Size Inches	Free length Inches	Wire Diameter Inches	Solid Load Lbs.
D-122	0.562	0.25	36	0.125 x .062	125
D-123	0.625	0.25	36	0.156 x .078	160
D-124	0.75	0.375	36	0.156 x .094	225
D-125	0.875	0.438	36	0.187 x .109	250
D-126	1	0.5	36	0.218 x .109	325
D-127	1.062	0.5	36	0.25 x .125	450
D-128	1.125	0.562	36	0.25 x .156	550
D-129	1.25	0.625	36	0.281 x .156	675
D-130	1.5	0.75	36	0.312 x .187	825
D-131	1.75	0.875	36	0.375 x .187	950
D-132	2	1	36	0.437 x .218	1400

Maximum Deflection Approximately 40% of Free Length


* Loads near solid lengths for reference only; overstressed condition.

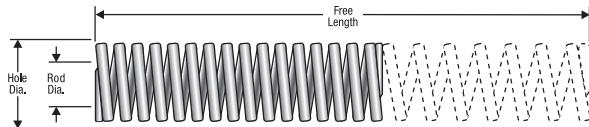

Die Springs LIGHT-DUTY CHROME ALLOY (BLUE)

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Dia. Inches	Free Length Inches	Rate Lbs./In.	Approx. Max. Deflection* 50% Of Free Length Defl. In.	Deflection For Long Life 35% Of Free Length		Deflection For Optimum Life 25% Of Free Length	
							Force Lbs.	Defl. In.	Force Lbs.	Defl. In.
D-1101				1	60	0.5	21	0.35	15	0.25
D-1102				1.25	50	0.63	22	0.44	15.5	0.31
D-1103	3/8	3/16		1.5	42	0.75	22.3	0.53	16	0.38
D-1103-A				1.75	37	0.88	22.6	0.61	16.3	0.44
D-1104	0.375	0.187	0.070 x 0.039	2	31	1	21.7	0.7	15.5	0.5
D-1105				2.5	26	1.25	22.9	0.88	16.4	0.63
D-1106				3	21	1.5	22.1	1.05	15.8	0.75
D-1106-A				12	6	6	25.2	4.2	18	3
D-1107				1	110	0.5	38.5	0.35	27.5	0.25
D-1108				1.25	82	0.63	36.1	0.44	25.4	0.31
D-1109	1/2	9/32		1.5	68	0.75	36	0.53	25.8	0.38
D-1109-A				1.75	60	0.88	36.6	0.61	26.4	0.44
D-1110				2	55	1	38.5	0.7	27.5	0.5
D-1111	0.5	0.281	0.093 x 0.052	2.5	45	1.25	39.6	0.88	28.4	0.63
D-1112				3	35	1.5	36.8	1.05	26.3	0.75
D-1113				3.5	30	1.75	36.9	1.23	26.4	0.88
D-1113-A				12	7	6	29.4	4.2	21	3
D-1114				1	164	0.5	57.4	0.35	41	0.25
D-1115				1.25	124	0.63	54.6	0.44	38.4	0.31
D-1116				1.5	108	0.75	57.2	0.53	41	0.38
D-1116-A	5/8	11/32		1.75	96	0.88	58.6	0.61	42.2	0.44
D-1117				2	86	1	60.2	0.7	43	0.5
D-1118	0.625	0.344	0.109 x 0.069	2.5	65	1.25	57.2	0.88	41	0.63
D-1119				3	58	1.5	60.9	1.05	43.5	0.75
D-1120				3.5	50	1.75	61.5	1.23	44	0.88
D-1121				4	44	2	61.6	1.4	44	1
D-1121-A				12	15	6	63	4.2	45	3
D-1122				1	320	0.5	112	0.35	80	0.25
D-1122-A				1.25	256	0.63	112.6	0.44	79.4	0.31
D-1123				1.5	200	0.75	106	0.53	76	0.38
D-1123-A				1.75	176	0.88	107.4	0.61	77.4	0.44
D-1124	3/4	3/8		2	150	1	105	0.7	75	0.5
D-1125				2.5	120	1.25	105.6	0.88	75.6	0.63
D-1126				3	101	1.5	106.1	1.05	75.8	0.75
D-1127	0.750	0.375	0.165 x 0.075	3.5	83	1.75	102.1	1.23	73	0.88
D-1128				4	75	2	105	1.4	75	1
D-1129				4.5	64	2.25	101.1	1.58	72.3	1.13
D-1130				5	60	2.5	105	1.75	75	1.25
D-1131				5.5	55	2.75	106.2	1.93	75.9	1.38
D-1132				6	50	3	105	2.1	75	1.5
D-1132-A				12	24	6	100.8	4.2	72	3
D-1133				1	550	0.5	192.5	0.35	137.5	0.25
D-1133-A				1.25	450	0.63	198	0.44	139.5	0.31
D-1134				1.5	373	0.75	197.7	0.53	141.7	0.38
D-1134-A				1.75	320	0.88	195.2	0.61	140.8	0.44
D-1135	1	1/2		2	268	1	187.6	0.7	134	0.5
D-1136				2.5	209	1.25	183.9	0.88	131.7	0.63
D-1137	1.000	0.5	0.215 x 0.100	3	171	1.5	179.6	1.05	128.3	0.75
D-1138				3.5	145	1.75	178.4	1.23	127.6	0.88
D-1139				4	125	2	175	1.4	125	1
D-1140				4.5	110	2.25	173.8	1.58	124.3	1.13
D-1141				5	96	2.5	168	1.75	120	1.25
D-1142				5.5	88	2.75	169.8	1.93	121.4	1.38
D-1143				6	80	3	168	2.1	120	1.5
D-1144				7	72	3.5	176.4	2.45	126	1.75
D-1145				8	60	4	168	2.8	120	2
D-1145-A				12	40	6	168	4.2	120	3
D-1146				1.5	496	0.75	262.9	0.53	188.5	0.38
D-1146-A				1.75	406	0.88	247.7	0.61	178.6	0.44
D-1147				2	376	1	263.2	0.7	188	0.5
D-1148	1-1/4	5/8		2.5	288	1.25	253.4	0.88	181.4	0.63
D-1149				3	240	1.5	252	1.05	180	0.75
D-1150				3.5	200	1.75	246	1.23	176	0.88
D-1151	1.25	0.625	0.285 x 0.115	4	176	2	246.4	1.4	176	1
D-1152				4.5	160	2.25	252.8	1.58	180.8	1.13
D-1153				5	143	2.5	250.3	1.75	178.8	1.25
D-1154				5.5	128	2.75	247	1.93	176.6	1.38
D-1155				6	120	3	252	2.1	180	1.5
D-1156				7	104	3.5	254.8	2.45	182	1.75
D-1157				8	88	4	246.4	2.8	176	2
D-1158				10	72	5	252	3.5	180	2.5
D-1158-A				12	60	6	252	4.2	180	3

* Loads near solid lengths for reference only; overstressed condition.

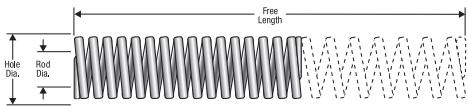

Century Spring


Die Springs LIGHT-DUTY CHROME ALLOY (BLUE)

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Dia. Inches	Free Length Inches	Rate Lbs./In.	Approx. Max. Deflection* 50% Of Free Length Defl. In.	Deflection For Long Life 35% Of Free Length		Deflection For Optimum Life 25% Of Free Length	
							Force Lbs.	Defl. In.	Force Lbs.	Defl. In.
D-1159				2	530	1	371	0.7	265	0.5
D-1160				2.5	427	1.25	375.8	0.88	269	0.63
D-1161				3	360	1.5	378	1.05	270	0.75
D-1162				3.5	300	1.75	369	1.23	264	0.88
D-1163				4	249	2	348.6	1.4	249	1
D-1164	1-1/2	3/4		4.5	230	2.25	363.4	1.58	259.9	1.13
D-1165				5	210	2.5	367.5	1.75	262.5	1.25
D-1166	1.5	0.75	0.345 x 0.135	5.5	185	2.75	357.1	1.93	255.3	1.38
D-1167				6	170	3	357	2.1	255	1.5
D-1168				7	153	3.5	374.9	2.45	267.8	1.75
D-1169				8	132	4	369.6	2.8	264	2
D-1170				10	106	5	371	3.5	265	2.5
D-1170-A				12	85	6	357	4.2	255	3
D-1171				2.5	1000	1.25	880	0.88	630	0.63
D-1172				3	830	1.5	871.5	1.05	622.5	0.75
D-1173				3.5	677	1.75	832.7	1.23	595.8	0.88
D-1174				4	600	2	840	1.4	600	1
D-1175				4.5	530	2.25	837.4	1.58	598.9	1.13
D-1176	2	1		5	470	2.5	822.5	1.75	587.5	1.25
D-1177				5.5	405	2.75	781.7	1.93	558.9	1.38
D-1178	2.00	1.00	0.468 x 0.195	6	390	3	819	2.1	585	1.5
D-1179				7	312	3.5	764.4	2.45	546	1.75
D-1180				8	285	4	798	2.8	570	2
D-1181				10	216	5	756	3.5	540	2.5
D-1181-A				12	185	6	777	4.2	555	3

Die Springs MEDIUM-DUTY CHROME ALLOY (RED)

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Dia. Inches	Free Length Inches	Rate Lbs./In.	Approx. Max. Deflection* 37% Of Free Length Defl. In.	Deflection for Long Life 25% of Free Length		Deflection for Optimum Life 20% of Free Length	
							Force Lbs.	Defl. In.	Force Lbs.	Defl. In.
D-1201				1	84	0.37	21	0.25	16.8	0.2
D-1202				1.25	73	0.46	22.6	0.31	18.3	0.25
D-1203	3/8	3/16		1.5	67	0.56	25.5	0.38	20.1	0.3
D-1203-A				1.75	58	0.65	25.5	0.44	20.3	0.35
D-1204	0.375	0.187	0.067 x 0.046	2	50	0.74	25	0.5	20	0.4
D-1205				2.5	37	0.93	23.3	0.63	18.5	0.5
D-1206				3	30	1.11	22.5	0.75	18	0.6
D-1206-A				12	8	4.44	24	3	19.2	2.4
D-1207				1	155	0.37	38.8	0.25	31	0.2
D-1208				1.25	122	0.46	37.8	0.31	30.5	0.25
D-1209				1.5	98	0.56	37.2	0.38	29.4	0.3
D-1209-A	1/2	9/32		1.75	85	0.65	37.4	0.44	29.8	0.35
D-1210				2	75	0.74	37.5	0.5	30	0.4
D-1211	0.50	0.281	0.093 x 0.061	2.5	60	0.93	37.8	0.63	30	0.5
D-1212				3	51	1.11	38.3	0.75	30.6	0.6
D-1213				3.5	40	1.3	35.2	0.88	28	0.7
D-1213-A				12	11	4.44	33	3	26.4	2.4
D-1214				1	300	0.37	75	0.25	60	0.2
D-1215				1.25	215	0.46	66.7	0.31	53.8	0.25
D-1216				1.5	190	0.56	72.2	0.38	57	0.3
D-1216-A	5/8	11/32		1.75	168	0.65	73.9	0.44	58.8	0.35
D-1217				2	155	0.74	77.5	0.5	62	0.4
D-1218	0.625	0.344	0.117 x 0.081	2.5	115	0.93	72.5	0.63	57.5	0.5
D-1219				3	100	1.11	75	0.75	60	0.6
D-1220				3.5	85	1.3	74.8	0.88	59.5	0.7
D-1221				4	76	1.48	76	1	60.8	0.8
D-1221-A				12	26	4.44	78	3	62.4	2.4
D-1222				1	500	0.37	125	0.25	100	0.2
D-1222-A				1.25	380	0.46	117.8	0.31	95	0.25
D-1223				1.5	310	0.56	117.8	0.38	93	0.3
D-1223-A				1.75	270	0.65	118.8	0.44	94.5	0.35
D-1224				2	240	0.74	120	0.5	96	0.4
D-1225	3/4	3/8		2.5	188	0.93	118.4	0.63	94	0.5
D-1226				3	149	1.11	111.8	0.75	89.4	0.6
D-1227	0.75	0.375	0.156 x 0.093	3.5	128	1.3	112.6	0.88	89.6	0.7
D-1228				4	110	1.48	110	1	88	0.8
D-1229				4.5	100	1.67	113	1.13	90	0.9
D-1230				5	90	1.85	112.5	1.25	90	1
D-1231				5.5	80	2.04	110.4	1.38	88	1.1
D-1232				6	75	2.22	112.5	1.5	90	1.2
D-1232-A				12	35	4.44	105	3	84	2.4

* Loads near solid lengths for reference only; overstressed condition.

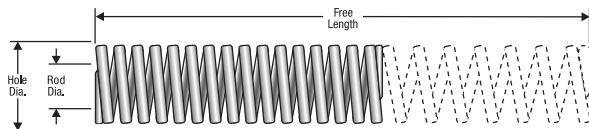


Die Springs MEDIUM-DUTY CHROME ALLOY (RED)

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Dia. Inches	Free Length Inches	Rate Lbs./In.	Approx. Max. Deflection* 37% of Free Length Defl. In.		Deflection for Long Life 25% of Free Length Force Lbs. Defl. In.		Deflection for Optimum Life 20% of Free Length Force Lbs. Defl. In.	
						Defl. In.	Force Lbs.	Defl. In.	Force Lbs.	Defl. In.	
D-1233				1	827	0.37	206.8	0.25	165.4	0.2	
D-1233-A				1.25	653	0.46	202.4	0.31	163.3	0.25	
D-1234				1.5	538	0.56	204.4	0.38	161.4	0.3	
D-1234-A				1.75	461	0.65	202.8	0.44	161.4	0.35	
D-1235				2	400	0.74	200	0.5	160	0.4	
D-1236				2.5	322	0.93	202.9	0.63	161	0.5	
D-1237	1	1/2		3	267	1.11	200.3	0.75	160.2	0.6	
D-1238				3.5	229	1.3	201.5	0.88	160.3	0.7	
D-1239	1.000	0.500	0.218 x 0.115	4	202	1.48	202	1	161.6	0.8	
D-1240				4.5	178	1.67	201.1	1.13	160.2	0.9	
D-1241				5	157	1.85	196.3	1.25	157	1	
D-1242				5.5	137	2.04	189.1	1.38	150.7	1.1	
D-1243				6	125	2.22	187.5	1.5	150	1.2	
D-1244				7	109	2.59	190.8	1.75	152.6	1.4	
D-1245				8	96	2.96	192	2	153.6	1.6	
D-1245-A				12	65	4.44	195	3	156	2.4	
D-1246				1.5	1144	0.56	434.7	0.38	343.2	0.3	
D-1246-A				1.75	1008	0.65	443.5	0.44	352.8	0.35	
D-1247				2	838	0.74	419	0.5	335.2	0.4	
D-1248				2.5	624	0.93	393.1	0.63	312	0.5	
D-1249				3	512	1.11	384	0.75	307.2	0.6	
D-1250				3.5	440	1.3	387.2	0.88	308	0.7	
D-1251	1-1/4	5/8		4	381	1.48	381	1	304.8	0.8	
D-1252				4.5	329	1.67	371.8	1.13	296.1	0.9	
D-1253	1.25	0.625	0.281 x 0.156	5	300	1.85	375	1.25	300	1	
D-1254				5.5	264	2.04	364.3	1.38	290.4	1.1	
D-1255				6	250	2.22	375	1.5	300	1.2	
D-1256				7	210	2.59	367.5	1.75	294	1.4	
D-1257				8	184	2.96	368	2	294.4	1.6	
D-1258				10	145	3.7	362.5	2.5	290	2	
D-1258-A				12	124	4.44	372	3	297.6	2.4	
D-1259				2	1030	0.74	515	0.5	412	0.4	
D-1260				2.5	812	0.93	511.6	0.63	406	0.5	
D-1261				3	624	1.11	468	0.75	374.4	0.6	
D-1262				3.5	540	1.3	475.2	0.88	378	0.7	
D-1263	1-1/2	3/4		4	465	1.48	465	1	372	0.8	
D-1264				4.5	410	1.67	463.3	1.13	369	0.9	
D-1265	1.5	0.75	0.312 x 0.188	5	368	1.85	460	1.25	368	1	
D-1266				5.5	330	2.04	455.4	1.38	363	1.1	
D-1267				6	295	2.22	442.5	1.5	354	1.2	
D-1268				7	255	2.59	446.3	1.75	357	1.4	
D-1269				8	220	2.96	440	2	352	1.6	
D-1270				10	176	3.7	440	2.5	352	2	
D-1270-A				12	144	4.44	432	3	345.6	2.4	
D-1271				2.5	1184	0.93	745.9	0.63	592	0.5	
D-1272				3	930	1.11	697.5	0.75	558	0.6	
D-1273				3.5	782	1.3	688.2	0.88	547.4	0.7	
D-1274				4	664	1.48	664	1	531.2	0.8	
D-1275	2	1		4.5	600	1.67	678	1.13	540	0.9	
D-1276				5	534	1.85	667.5	1.25	534	1	
D-1277	2.000	1.000	0.438 x 255	5.5	490	2.04	676.2	1.38	539	1.1	
D-1278				6	450	2.22	675	1.5	540	1.2	
D-1279				7	374	2.59	654.5	1.75	523.6	1.4	
D-1280				8	330	2.96	660	2	528	1.6	
D-1281				10	260	3.7	650	2.5	520	2	
D-1281-A				12	215	4.44	645	3	516	2.4	

Die Springs HEAVY-DUTY CHROME ALLOY (GOLD)

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Dia. Inches	Free Length Inches	Rate Lbs./In.	Approx. Max. Deflection* 30% of Free Length Defl. In.	Deflection for Long Life 20% of Free Length Force Lbs. Defl. In.	Deflection for Optimum Life 15% of Free Length Force Lbs. Defl. In.		
D-1301				1	116	0.3	23.2	0.2	17.4	0.15
D-1302				1.25	98	0.38	24.5	0.25	18.6	0.19
D-1303	3/8	3/16		1.5	80	0.45	24	0.3	18.4	0.23
D-1303-A				1.75	75	0.53	26.3	0.35	19.5	0.26
D-1304	0.375	0.187	0.072 x 0.054	2	62	0.6	24.8	0.4	18.6	0.3
D-1305				2.5	50	0.75	25	0.5	19	0.38
D-1306				3	41	0.9	24.6	0.6	18.5	0.45
D-1306-A				12	11	3.6	26.4	2.4	19.8	1.8

* Loads near solid lengths for reference only; overstressed condition.

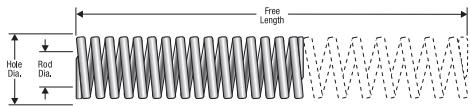


Century Spring

Die Springs HEAVY-DUTY CHROME ALLOY (GOLD)

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Dia. Inches	Free Length Inches	Rate Lbs./In.	Approx. Max. Deflection* 30% of Free Length Defl. In.	Deflection for Long Life 20% of Free Length		Deflection for Optimum Life 15% of Free Length	
							Force Lbs.	Defl. In.	Force Lbs.	Defl. In.
D-1307				1	225	0.3	45	0.2	33.8	0.15
D-1308				1.25	182	0.38	45.5	0.25	34.6	0.19
D-1309				1.5	148	0.45	44.4	0.3	34	0.23
D-1309-A	1/2	9/32		1.75	126	0.53	44.1	0.35	32.8	0.26
D-1310				2	110	0.6	44	0.4	33	0.3
D-1311	0.5	0.281	0.093 x 0.070	2.5	86	0.75	43	0.5	32.7	0.38
D-1312				3	74	0.9	44.4	0.6	33.3	0.45
D-1313				3.5	60	1.05	42	0.7	31.8	0.53
D-1313-A				12	17	3.6	40.8	2.4	30.6	1.8
D-1314				1	424	0.3	84.8	0.2	63.6	0.15
D-1315				1.25	325	0.38	81.3	0.25	61.8	0.19
D-1316				1.5	280	0.45	84	0.3	64.4	0.23
D-1316-A	5/8	11/32		1.75	240	0.53	84	0.35	62.4	0.26
D-1317				2	208	0.6	83.2	0.4	62.4	0.3
D-1318	0.625	0.344	0.125 x 0.093	2.5	170	0.75	85	0.5	64.6	0.38
D-1319				3	140	0.9	84	0.6	63	0.45
D-1320				3.5	122	1.05	85.4	0.7	64.7	0.53
D-1321				4	108	1.2	86.4	0.8	64.8	0.6
D-1321-A				12	30	3.6	72	2.4	54	1.8
D-1322				1	1080	0.3	216	0.2	162	0.15
D-1322-A				1.25	880	0.38	220	0.25	167.2	0.19
D-1323				1.5	690	0.45	207	0.3	158.7	0.23
D-1323-A				1.75	600	0.53	210	0.35	156	0.26
D-1324				2	515	0.6	206	0.4	154.5	0.3
D-1325	3/4	3/8		2.5	400	0.75	200	0.5	152	0.38
D-1326				3	330	0.9	198	0.6	148.5	0.45
D-1327	0.75	0.375	0.165 x 0.125	3.5	290	1.05	203	0.7	153.7	0.53
D-1328				4	250	1.2	200	0.8	150	0.6
D-1329				4.5	220	1.35	198	0.9	149.6	0.68
D-1330				5	195	1.5	195	1	146.3	0.75
D-1331				5.5	178	1.65	195.8	1.1	147.7	0.83
D-1332				6	160	1.8	192	1.2	144	0.9
D-1332-A				12	80	3.6	192	2.4	144	1.8
D-1333				1	1932	0.3	386.4	0.2	289.8	0.15
D-1333-A				1.25	1465	0.38	366.3	0.25	278.4	0.19
D-1334				1.5	1200	0.45	360	0.3	276	0.23
D-1334-A				1.75	1040	0.53	364	0.35	270.4	0.26
D-1335				2	872	0.6	348.8	0.4	261.6	0.3
D-1336				2.5	665	0.75	332.5	0.5	252.7	0.38
D-1337	1	1/2		3	544	0.9	326.4	0.6	244.8	0.45
D-1338				3.5	456	1.05	319.2	0.7	241.7	0.53
D-1339	1.000	0.500	0.225 x 0.158	4	400	1.2	320	0.8	240	0.6
D-1340				4.5	352	1.35	316.8	0.9	239.4	0.68
D-1341				5	312	1.5	312	1	234	0.75
D-1342				5.5	288	1.65	316.8	1.1	239	0.83
D-1343				6	256	1.8	307.2	1.2	230.4	0.9
D-1344				7	224	2.1	313.6	1.4	235.2	1.05
D-1345				8	192	2.4	307.2	1.6	230.4	1.2
D-1345-A				12	128	3.6	307.2	2.4	230.4	1.8
D-1346				1.5	2200	0.45	660	0.3	506	0.23
D-1346-A				1.75	1816	0.53	635.6	0.35	472.2	0.26
D-1347				2	1496	0.6	598.4	0.4	448.8	0.3
D-1348				2.5	1176	0.75	588	0.5	446.9	0.38
D-1349				3	952	0.9	571.2	0.6	428.4	0.45
D-1350	-1/4	5/8		3.5	780	1.05	546	0.7	413.4	0.53
D-1351				4	664	1.2	531.2	0.8	398.4	0.6
D-1352	1.25	0.625	0.295 x 0.200	4.5	584	1.35	525.6	0.9	397.1	0.68
D-1353				5	530	1.5	530	1	397.5	0.75
D-1354				5.5	472	1.65	519.2	1.1	391.8	0.83
D-1355				6	450	1.8	540	1.2	405	0.9
D-1356				7	368	2.1	515.2	1.4	386.4	1.05
D-1357				8	328	2.4	524.8	1.6	393.6	1.2
D-1358				10	256	3	512	2	384	1.5
D-1358-A				12	220	3.6	528	2.4	396	1.8
D-1359				2	1980	0.6	792	0.4	594	0.3
D-1360				2.5	1550	0.75	775	0.5	589	0.38
D-1361				3	1300	0.9	780	0.6	585	0.45
D-1362				3.5	1064	1.05	744.8	0.7	563.9	0.53
D-1363	1-1/2	3/4		4	912	1.2	729.6	0.8	547.2	0.6
D-1364				4.5	816	1.35	734.4	0.9	554.9	0.68
D-1365	1.5	0.75	0.350 x 0.225	5	730	1.5	730	1	547.5	0.75
D-1366				5.5	670	1.65	737	1.1	556.1	0.83
D-1367				6	584	1.8	700.8	1.2	525.6	0.9
D-1368				7	496	2.1	694.4	1.4	520.8	1.05
D-1369				8	432	2.4	691.2	1.6	518.4	1.2
D-1370				10	362	3	724	2	543	1.5
D-1370-A				12	300	3.6	720	2.4	540	1.8

* Loads near solid lengths for reference only; overstressed condition.

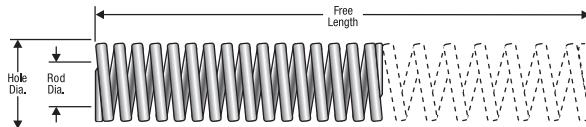


Die Springs HEAVY-DUTY CHROME ALLOY (GOLD)

Century Stock Number	Hole Size	Rod Size	Wire Dia.	Free Length Inches	Rate Lbs./In.	Approx. Max. Deflection* 30% of Free Length Defl. In.	Deflection for Long Life 20% of Free Length		Deflection for Optimum Life 15% of Free Length	
	Inches	Inches	Inches				Force Lbs.	Defl. In.	Force Lbs.	Defl. In.
D-1371				2.5	2512	0.75	1256	0.5	954.6	0.38
D-1372				3	2060	0.9	1236	0.6	927	0.45
D-1373				3.5	1700	1.05	1190	0.7	901	0.53
D-1374				4	1500	1.2	1200	0.8	900	0.6
D-1375	2	1		4.5	1272	1.35	1144.8	0.9	865	0.68
D-1376				5	1186	1.5	1186	1	889.5	0.75
D-1377	2.000	1.000	0.470 x 0.280	5.5	1077	1.65	1184.7	1.1	893.9	0.83
D-1378				6	977	1.8	1172.4	1.2	879.3	0.9
D-1379				7	820	2.1	1148	1.4	861	1.05
D-1380				8	730	2.4	1168	1.6	876	1.2
D-1381				10	572	3	1144	2	858	1.5
D-1381-A				12	477	3.6	1144.8	2.4	858.6	1.8

Die Springs EXTRA HEAVY-DUTY CHROME ALLOY (GREEN)

Century Stock Number	Hole Size	Rod Size	Wire Dia.	Free Length Inches	Rate Lbs./In.	Approx. Max. Deflection* 25% of Free Length Defl. In.	Deflection for Long Life 17% of Free Length		Deflection for Optimum Life 15% of Free Length	
	Inches	Inches	Inches				Force Lbs.	Defl. In.	Force Lbs.	Defl. In.
D-1401				1	210	0.25	35.7	0.17	31.5	0.15
D-1402				1.25	146	0.31	30.7	0.21	27.7	0.19
D-1403	3/8	3/16		1.5	125	0.38	32.5	0.26	28.8	0.23
D-1404				1.75	105	0.44	31.5	0.3	27.3	0.26
D-1405	0.375	0.187	0.080 x 0.059	2	90	0.5	30.6	0.34	27	0.3
D-1406				2.5	75	0.63	32.3	0.43	28.5	0.38
D-1407				3	63	0.75	32.1	0.51	28.4	0.45
D-1408				12	15	3	30.6	2.04	27	1.8
D-1409				1	310	0.25	52.7	0.17	46.5	0.15
D-1410				1.25	240	0.31	50.4	0.21	45.6	0.19
D-1411				1.5	192	0.38	49.9	0.26	44.2	0.23
D-1412	1/2	9/32		1.75	170	0.44	51	0.3	44.2	0.26
D-1413				2	140	0.5	47.6	0.34	42	0.3
D-1414	0.5	0.281	0.097 x 0.084	2.5	115	0.63	49.5	0.43	43.7	0.38
D-1415				3	94	0.75	47.9	0.51	42.3	0.45
D-1416				3.5	80	0.88	48	0.6	42.4	0.53
D-1417				12	24	3	49	2.04	43.2	1.8
D-1418				1	630	0.25	107.1	0.17	94.5	0.15
D-1419				1.25	438	0.31	92	0.21	83.2	0.19
D-1420				1.5	370	0.38	96.2	0.26	85.1	0.23
D-1421	5/8	11/32		1.75	310	0.44	93	0.3	80.6	0.26
D-1422				2	280	0.5	95.2	0.34	84	0.3
D-1423	0.625	0.344	0.126 x 0.110	2.5	220	0.63	94.6	0.43	83.6	0.38
D-1424				3	190	0.75	96.9	0.51	85.5	0.45
D-1425				3.5	154	0.88	92.4	0.6	81.6	0.53
D-1426				4	135	1	91.8	0.68	81	0.6
D-1427				12	45	3	91.8	2.04	81	1.8
D-1428				1	1400	0.25	238	0.17	210	0.15
D-1429				1.25	1100	0.31	231	0.21	209	0.19
D-1430				1.5	890	0.38	231.4	0.26	204.7	0.23
D-1431				1.75	750	0.44	225	0.3	195	0.26
D-1432				2	660	0.5	224.4	0.34	198	0.3
D-1433	3/4	3/8		2.5	500	0.63	215	0.43	190	0.38
D-1434				3	405	0.75	206.6	0.51	182.3	0.45
D-1435	0.75	0.375	0.165 x 0.135	3.5	345	0.88	207	0.6	182.9	0.53
D-1436				4	300	1	204	0.68	180	0.6
D-1437				4.5	265	1.13	204.1	0.77	180.2	0.68
D-1438				5	235	1.25	199.8	0.85	176.3	0.75
D-1439				5.5	215	1.38	202.1	0.94	178.5	0.83
D-1440				6	195	1.5	198.9	1.02	175.5	0.9
D-1441				12	95	3	193.8	2.04	171	1.8
D-1442				1.5	1600	0.38	416	0.26	368	0.23
D-1443				2	1160	0.5	394.4	0.34	348	0.3
D-1444				2.5	896	0.63	385.3	0.43	340.5	0.38
D-1445	1	1/2		3	736	0.75	375.4	0.51	331.2	0.45
D-1446				3.5	624	0.88	374.4	0.6	330.7	0.53
D-1447	1.000	0.500	0.225 x 0.188	4	552	1	375.4	0.68	331.2	0.6
D-1448				4.5	488	1.13	375.8	0.77	331.8	0.68
D-1449				5	432	1.25	367.2	0.85	324	0.75
D-1450				6	360	1.5	367.2	1.02	324	0.9
D-1451				12	176	3	359	2.04	316.8	1.8

* Loads near solid lengths for reference only; overstressed condition.

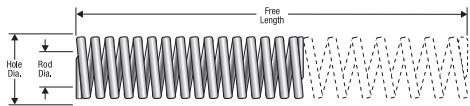


Century Spring

Die Springs EXTRA HEAVY-DUTY CHROME ALLOY (GREEN)

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Dia. Inches	Free Length Inches	Rate Lbs./In.	Approx. Max. Deflection* 25% of Free Length		Deflection for Long Life 17% of Free Length Force Lbs.	Deflection for Optimum Life 15% of Free Length Force Lbs.
						Defl. In.	Defl. In.		
D-1452				2	2050	0.5	697	0.34	615
D-1453				2.5	1525	0.63	655.8	0.43	579.5
D-1454				3	1220	0.75	622.2	0.51	549
D-1455				3.5	1085	0.88	651	0.6	575.1
D-1456	1-1/4	5/8	0.295 x 0.225	4	890	1	605.2	0.68	534
D-1457				4.5	835	1.13	643	0.77	567.8
D-1458	1.25	0.625		5	700	1.25	595	0.85	525
D-1459				6	575	1.5	586.5	1.02	517.5
D-1460				8	460	2	625.6	1.36	552
D-1461				10	345	2.5	586.5	1.7	517.5
D-1462				12	270	3	550.8	2.04	486
D-1463				2	4085	0.5	1388.9	0.34	1225.5
D-1464				2.5	3285	0.63	1412.6	0.43	1248.3
D-1465				3	2550	0.75	1300.5	0.51	1147.5
D-1466				3.5	2135	0.88	1281	0.6	1131.6
D-1467	1-1/2	3/4	0.350 x 0.300	4	1845	1	1254.6	0.68	1107
D-1468				4.5	1625	1.13	1251.3	0.77	1105
D-1469	1.5	0.75		5	1450	1.25	1232.5	0.85	1087.5
D-1470				6	1205	1.5	1229.1	1.02	1084.5
D-1471				8	905	2	1230.8	1.36	1086
D-1472				10	710	2.5	1207	1.7	1065
D-1473				12	550	3	1122	2.04	990
D-1474				2.5	4110	0.63	1767.3	0.43	1561.8
D-1475				3	3190	0.75	1626.9	0.51	1435.5
D-1476				3.5	2764	0.88	1658.4	0.6	1464.9
D-1477	2	1	0.460 x 0.365	4	2311	1	1571.5	0.68	1386.6
D-1478				4.5	1888	1.13	1453.8	0.77	1283.8
D-1479	2.000	1.000		5	1804	1.25	1533.4	0.85	1353
D-1480				6	1473	1.5	1502.5	1.02	1325.7
D-1481				8	1116	2	1517.8	1.36	1339.2
D-1482				10	884	2.5	1502.8	1.7	1326
D-1483				12	712	3	1452.5	2.04	1281.6

* Loads near solid lengths for reference only; overstressed condition.

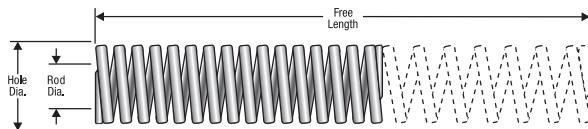


Die Springs LIGHT LOAD CHROME SILICON (GREEN)

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Dia. Inches	Free Length Inches	Rate Lbs./In.	Deflection for Long Life 25% of Free Length		Deflection for Average Life 30% of Free Length		Approx. Max. Deflection* 40% of Free Length	
						Force Lbs.	Defl. In.	Force Lbs.	Defl. In.	Force Lbs.	Defl. In.
D-9060411	3/8	3/16	0.071 x 0.039	1	63	16	0.25	19	0.3	25	0.4
D-9060511				1.25	50	16	0.31	19	0.38	25	0.5
D-9060611				1.5	42	16	0.37	19	0.45	25	0.6
D-9060711				1.75	36	16	0.43	19	0.52	25	0.69
D-9060811				2	31	15	0.5	18	0.6	25	0.8
D-9061011				2.5	26	16	0.63	19	0.76	26	1.01
D-9061211				3	21	16	0.75	19	0.9	25	1.2
D-9064811				12	5	15	3	18	3.6	24	4.8
D-9080411	1/2	9/32	0.095 x 0.052	1	109	27	0.25	32	0.3	43	0.4
D-9080511				1.25	94	30	0.31	36	0.38	47	0.5
D-9080611				1.5	78	29	0.37	35	0.45	47	0.6
D-9080711				1.75	66	29	0.43	34	0.52	46	0.69
D-9080811				2	58	29	0.5	35	0.6	47	0.8
D-9081011				2.5	47	29	0.63	35	0.76	47	1.01
D-9081211				3	36	27	0.75	32	0.9	43	1.2
D-9081411				3.5	31	27	0.88	32	1.05	43	1.4
D-9084811				12	8	25	3	30	3.6	40	4.8
D-9100411	5/8	11/32	0.117 x 0.068	1	180	44	0.25	53	0.3	71	0.4
D-9100511				1.25	140	43	0.31	53	0.38	70	0.5
D-9100611				1.5	120	45	0.37	54	0.45	72	0.6
D-9100711				1.75	100	43	0.43	52	0.52	69	0.69
D-9100811				2	93	47	0.5	56	0.6	75	0.8
D-9101011				2.5	72	45	0.63	54	0.76	73	1.01
D-9101211				3	59	44	0.75	53	0.9	71	1.2
D-9101411				3.5	53	46	0.88	56	1.05	74	1.4
D-9101611				4	47	47	1	57	1.2	75	1.61
D-9104811				12	15	45	3	54	3.6	72	4.8
D-9120411	3/4	3/8	0.155 x 0.082	1	320	79	0.25	94	0.3	126	0.4
D-9120511				1.25	244	77	0.31	92	0.38	123	0.5
D-9120611				1.5	193	72	0.37	87	0.45	115	0.6
D-9120711				1.75	162	70	0.43	84	0.52	112	0.69
D-9120811				2	142	71	0.5	86	0.6	114	0.8
D-9121011				2.5	110	69	0.63	83	0.76	111	1.01
D-9121211				3	92	69	0.75	83	0.9	110	1.2
D-9121411				3.5	77	67	0.88	81	1.05	108	1.4
D-9121611				4	68	68	1	82	1.2	109	1.61
D-9121811				4.5	60	67	1.12	81	1.35	108	1.8
D-9122011	1.000	0.500	0.212 x 0.106	5	53	66	1.25	80	1.5	106	2
D-9122211				5.5	49	67	1.38	80	1.65	107	2.2
D-9122411				6	45	67	1.5	81	1.8	108	2.39
D-9124811				12	22	65	3	78	3.6	104	4.8
D-9160411	1	1/2	0.155 x 0.082	1	612	151	0.25	181	0.3	241	0.4
D-9160511				1.25	462	146	0.31	175	0.38	233	0.5
D-9160611				1.5	370	138	0.37	166	0.45	221	0.6
D-9160711				1.75	306	133	0.43	159	0.52	212	0.69
D-9160811				2	265	133	0.5	160	0.6	213	0.8
D-9161011				2.5	204	129	0.63	154	0.76	206	1.01
D-9161211				3	168	126	0.75	151	0.9	201	1.2
D-9161411				3.5	141	124	0.88	148	1.05	198	1.4
D-9161611				4	121	121	1	146	1.2	194	1.61
D-9161811				4.5	107	120	1.12	144	1.35	192	1.8
D-9162011	1.25	0.625	0.273 x 0.132	5	96	120	1.25	144	1.5	192	2
D-9162211				5.5	87	120	1.38	144	1.65	192	2.2
D-9162411				6	80	120	1.5	144	1.8	191	2.39
D-9162811				7	69	121	1.75	145	2.1	193	2.8
D-9163211				8	60	120	2	144	2.4	192	3.2
D-9164811				12	40	120	3	144	3.6	192	4.8
D-9200611	1-1/4	5/8	0.273 x 0.132	1.5	579	217	0.37	260	0.45	346	0.6
D-9200711				1.75	475	206	0.43	247	0.52	329	0.69
D-9200811				2	407	204	0.5	245	0.6	327	0.8
D-9201011				2.5	314	198	0.63	237	0.76	316	1.01
D-9201211				3	263	197	0.75	236	0.9	315	1.2
D-9201411				3.5	222	194	0.88	233	1.05	311	1.4
D-9201611				4	192	193	1	231	1.2	308	1.61
D-9201811				4.5	169	190	1.12	228	1.35	303	1.8
D-9202011				5	150	188	1.25	225	1.5	300	2
D-9202211				5.5	135	186	1.38	223	1.65	298	2.2
D-9202411	1.25	0.625	0.273 x 0.132	6	123	184	1.5	221	1.8	294	2.39
D-9202811				7	104	182	1.75	219	2.1	292	2.8
D-9203211				8	91	182	2	218	2.4	291	3.2
D-9204011				10	72	180	2.5	216	3	288	4
D-9204811				12	59	177	3	213	3.6	283	4.8

Die Springs

* Loads near solid lengths for reference only; overstressed condition.

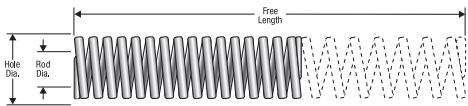

Century Spring


Die Springs LIGHT LOAD CHROME SILICON (GREEN)

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Dia. Inches	Free Length Inches	Rate Lbs./In.	Deflection for Long Life 25% of Free Length Force Lbs. Defl. In.	Deflection for Average Life 30% of Free Length Force Lbs. Defl. In.	Approx. Max. Deflection* 40% of Free Length Force Lbs. Defl. In.
D-9240811	1-1/2	3/4	0.32 x 0.160	2	603	303 0.5	363 0.6	484 0.8
D-9241011				2.5	458	289 0.63	346 0.76	462 1.01
D-9241211				3	375	281 0.75	337 0.9	449 1.2
D-9241411				3.5	318	279 0.88	334 1.05	446 1.4
D-9241611				4	273	274 1	329 1.2	439 1.61
D-9241811				4.5	241	270 1.12	324 1.35	433 1.8
D-9242011				5	216	270 1.25	324 1.5	432 2
D-9242211				5.5	194	267 1.38	321 1.65	428 2.2
D-9242411				6	176	263 1.5	316 1.8	421 2.39
D-9242811				7	150	263 1.75	315 2.1	420 2.8
D-9243211				8	129	258 2	309 2.4	412 3.2
D-9244011				10	103	258 2.5	309 3	412 4
D-9244811				12	84	252 3	303 3.6	403 4.8
D-9321011	2	1	0.442 x 0.206	2.5	899	566 0.63	680 0.76	906 1.01
D-9321211				3	720	539 0.75	646 0.9	862 1.2
D-9321411				3.5	602	527 0.88	633 1.05	844 1.4
D-9321611				4	512	514 1	617 1.2	822 1.61
D-9321811				4.5	449	504 1.12	605 1.35	806 1.8
D-9322011				5	400	500 1.25	600 1.5	800 2
D-9322211				5.5	360	496 1.38	595 1.65	794 2.2
D-9322411				6	328	491 1.5	589 1.8	785 2.39
D-9322811				7	278	487 1.75	584 2.1	779 2.8
D-9323211				8	238	476 2	571 2.4	761 3.2
D-9324011				10	188	470 2.5	564 3	752 4
D-9324811				12	155	465 3	558 3.6	744 4.8
D-9401211	2-1/2	1-1/2	0.45 x 0.296	3	1100	823 0.75	987 0.9	1317 1.2
D-9401411				3.5	899	788 0.88	945 1.05	1260 1.4
D-9401611				4	762	765 1	918 1.2	1224 1.61
D-9401811				4.5	660	741 1.12	889 1.35	1185 1.8
D-9402011				5	588	735 1.25	882 1.5	1176 2
D-9402411				6	476	712 1.5	855 1.8	1139 2.39
D-9402811				7	400	701 1.75	841 2.1	1121 2.8
D-9403211				8	344	687 2	825 2.4	1100 3.2
D-9404011				10	267	668 2.5	801 3	1068 4
D-9404811				12	220	660 3	793 3.6	1057 4.8

Die Springs MEDIUM LOAD CHROME SILICON (BLUE)

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Dia. Inches	Free Length Inches	Rate Lbs./In.	Deflection for Long Life 25% of Free Length Force Lbs. Defl. In.	Deflection for Average Life 30% of Free Length Force Lbs. Defl. In.	Approx. Max. Deflection* 37.5% of Free Length Force Lbs. Defl. In.
D-9060421	3/8	3/16	0.071 x 0.045	1	96	24 0.25	29 0.3	36 0.37
D-9060521				1.25	80	25 0.31	30 0.38	38 0.47
D-9060621				1.5	67	25 0.37	30 0.45	38 0.56
D-9060721				1.75	56	24 0.43	29 0.52	36 0.65
D-9060821				2	49	25 0.5	30 0.6	37 0.75
D-9061021				2.5	39	24 0.63	29 0.76	37 0.94
D-9061221				3	33	24 0.75	29 0.9	36 1.12
D-9064821				12	8	23 3	27 3.6	34 4.5
D-9080421				1	165	41 0.25	49 0.3	61 0.37
D-9080521				1.25	129	41 0.31	49 0.38	61 0.47
D-9080621				1.5	109	41 0.37	49 0.45	61 0.56
D-9080721				1.75	92	40 0.43	48 0.52	60 0.65
D-9080821				2	80	40 0.5	48 0.6	60 0.75
D-9081021	0.5	0.281	0.095 x 0.060	2.5	63	40 0.63	48 0.76	60 0.94
D-9081221				3	50	37 0.75	45 0.9	56 1.12
D-9081421				3.5	43	37 0.88	45 1.05	56 1.31
D-9084821				12	12	37 3	45 3.6	56 4.5
D-9100421	5/8	11/32	0.112 x 0.086	1	318	78 0.25	94 0.3	117 0.37
D-9100521				1.25	240	74 0.31	91 0.38	113 0.47
D-9100621				1.5	201	75 0.37	90 0.45	113 0.56
D-9100721				1.75	174	75 0.43	90 0.52	113 0.65
D-9100821				2	154	77 0.5	93 0.6	116 0.75
D-9101021				2.5	120	76 0.63	91 0.76	113 0.94
D-9101221				3	101	76 0.75	91 0.9	113 1.12
D-9101421				3.5	87	76 0.88	91 1.05	114 1.31
D-9101621				4	76	76 1	92 1.2	114 1.51
D-9104821				12	24	71 3	85 3.6	106 4.5


* Loads near solid lengths for reference only; overstressed condition.

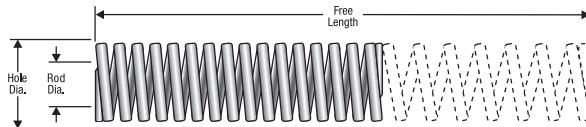

Die Springs MEDIUM LOAD CHROME SILICON (BLUE)

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Dia. Inches	Free Length Inches	Rate Lbs./In.	Deflection for Long Life 25% of Free Length		Deflection for Average Life 30% of Free Length		Approx. Max. Deflection* 37.5% of Free Length	
						Force Lbs.	Defl. In.	Force Lbs.	Defl. In.	Force Lbs.	Defl. In.
D-9120421				1	515	127	0.25	152	0.3	190	0.37
D-9120521				1.25	389	123	0.31	147	0.38	184	0.47
D-9120621				1.5	313	117	0.37	140	0.45	176	0.56
D-9120721				1.75	258	112	0.43	134	0.52	168	0.65
D-9120821				2	222	111	0.5	134	0.6	167	0.75
D-9121021	3/4	3/8	0.155 x 0.098	2.5	173	109	0.63	131	0.76	163	0.94
D-9121221				3	141	105	0.75	127	0.9	158	1.12
D-9121421	0.75	0.375	0.155 x 0.098	3.5	122	107	0.88	128	1.05	160	1.31
D-9121621				4	106	106	1	128	1.2	160	1.51
D-9121821				4.5	93	105	1.13	126	1.36	158	1.7
D-9122021				5	83	104	1.25	125	1.5	156	1.88
D-9122221				5.5	75	103	1.37	123	1.64	154	2.05
D-9122421				6	69	103	1.5	124	1.8	155	2.24
D-9124821				12	35	104	3	125	3.6	156	4.5
D-9160421				1	949	234	0.25	280	0.3	350	0.37
D-9160521				1.25	712	224	0.31	269	0.38	336	0.47
D-9160621				1.5	563	211	0.37	253	0.45	316	0.56
D-9160721				1.75	475	206	0.43	247	0.52	309	0.65
D-9160821				2	410	206	0.5	247	0.6	309	0.75
D-9161021	1	1/2	0.214 x 0.124	2.5	314	198	0.63	237	0.76	297	0.94
D-9161221				3	258	193	0.75	232	0.9	289	1.12
D-9161421	1.000	0.5	0.214 x 0.124	3.5	216	189	0.88	227	1.05	284	1.31
D-9161621				4	188	189	1	226	1.2	283	1.51
D-9161821				4.5	167	189	1.13	227	1.36	284	1.7
D-9162021				5	150	188	1.25	225	1.5	281	1.88
D-9162221				5.5	135	185	1.37	222	1.64	277	2.05
D-9162421				6	124	186	1.5	223	1.8	278	2.24
D-9162821				7	105	184	1.75	221	2.1	276	2.63
D-9163221				8	91	182	2	218	2.4	273	3
D-9164821				12	60	180	3	216	3.6	270	4.5
D-9200621				1.5	948	355	0.37	425	0.45	532	0.56
D-9200721				1.75	779	337	0.43	405	0.52	506	0.65
D-9200821				2	663	333	0.5	399	0.6	499	0.75
D-9201021				2.5	501	316	0.63	379	0.76	473	0.94
D-9201221				3	405	303	0.75	364	0.9	454	1.12
D-9201421				3.5	342	300	0.88	360	1.05	449	1.31
D-9201621	1-1/4	5/8	0.27 x 0.155	4	296	297	1	357	1.2	446	1.51
D-9201821				4.5	263	298	1.13	357	1.36	447	1.7
D-9202021	1.25	0.625	0.27 x 0.155	5	237	296	1.25	356	1.5	444	1.88
D-9202221				5.5	214	293	1.37	351	1.64	439	2.05
D-9202421				6	195	292	1.5	350	1.8	438	2.24
D-9202821				7	166	291	1.75	349	2.1	436	2.63
D-9203221				8	144	288	2	345	2.4	432	3
D-9204021				10	114	285	2.5	342	3	428	3.75
D-9204821				12	95	285	3	342	3.6	428	4.5
D-9240821				2	974	489	0.5	587	0.6	733	0.75
D-9241021				2.5	735	463	0.63	556	0.76	694	0.94
D-9241221				3	601	450	0.75	539	0.9	674	1.12
D-9241421				3.5	501	439	0.88	527	1.05	658	1.31
D-9241621				4	434	436	1	523	1.2	654	1.51
D-9241821	1-1/2	3/4	0.32 x 0.193	4.5	379	429	1.13	515	1.36	643	1.7
D-9242021				5	340	425	1.25	510	1.5	638	1.88
D-9242221	1.5	0.75	0.32 x 0.193	5.5	306	419	1.37	502	1.64	628	2.05
D-9242421				6	279	417	1.5	501	1.8	626	2.24
D-9242821				7	237	415	1.75	498	2.1	623	2.63
D-9243221				8	206	412	2	494	2.4	617	3
D-9244021				10	165	413	2.5	495	3	619	3.75
D-9244821				12	136	408	3	490	3.6	612	4.5
D-9321021				2.5	1210	762	0.63	915	0.76	1143	0.94
D-9321221				3	956	715	0.75	858	0.9	1073	1.12
D-9321421				3.5	798	699	0.88	839	1.05	1049	1.31
D-9321621				4	696	699	1	838	1.2	1048	1.51
D-9321821				4.5	612	693	1.13	831	1.36	1039	1.7
D-9322021	2	1	0.445 x 0.235	5	540	675	1.25	810	1.5	1013	1.88
D-9322221				5.5	488	668	1.37	801	1.64	1001	2.05
D-9322421	2.000	1.000	0.445 x 0.235	6	445	666	1.5	799	1.8	999	2.24
D-9322821				7	379	664	1.75	797	2.1	996	2.63
D-9323221				8	328	655	2	786	2.4	983	3
D-9323621				9	291	656	2.25	787	2.7	984	3.38
D-9324021				10	261	653	2.5	783	3	979	3.75
D-9324821				12	215	645	3	775	3.6	968	4.5

* Loads near solid lengths for reference only; overstressed condition.

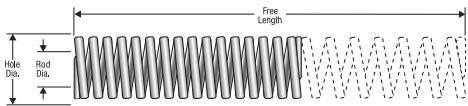

Century Spring

Die Springs MEDIUM LOAD CHROME SILICON (BLUE)


Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Dia. Inches	Free Length Inches	Rate Lbs./In.	Deflection for Long Life 25% of Free Length Force Lbs.	Deflection for Average Life 30% of Free Length Force Lbs.	Approx. Max. Deflection* 37.5% of Free Length Force Lbs.
D-9401221				3	1740	1304	0.75	1565
D-9401421				3.5	1430	1249	0.88	1499
D-9401621				4	1210	1211	1	1453
D-9401821				4.5	1060	1195	1.13	1434
D-9402021	2-1/2	1-1/2	0.450 x 0.350	5	937	1172	1.25	1406
D-9402421				6	759	1139	1.5	1366
D-9402821	2.5	1.5	0.450 x 0.350	7	638	1116	1.75	1339
D-9403221				8	550	1099	2	1319
D-9403621				9	488	1099	2.25	1318
D-9404021				10	439	1097	2.5	1316
D-9404821				12	362	1087	3	1305

Die Springs HEAVY LOAD CHROME SILICON (RED)

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Dia. Inches	Free Length Inches	Rate Lbs./In.	Deflection for Long Life 20% of Free Length Force Lbs.	Deflection for Average Life 25% of Free Length Force Lbs.	Approx. Max. Deflection* 30% of Free Length Force Lbs.
D-9060426				1	126	25	0.2	31
D-9060526				1.25	100	25	0.25	31
D-9060626	0.375	3/16		1.5	93	28	0.3	35
D-9060726				1.75	80	28	0.35	35
D-9060826	0.375	0.187	0.071 x 0.053	2	68	27	0.4	34
D-9061026				2.5	55	28	0.5	35
D-9061226				3	43	26	0.6	32
D-9064826				12	11	26	2.4	32
D-9080426				1	236	46	0.2	58
D-9080526				1.25	188	47	0.25	59
D-9080626				1.5	155	46	0.3	58
D-9080726	1/2	9/32		1.75	133	46	0.35	58
D-9080826				2	114	46	0.4	57
D-9081026	0.5	0.281	0.095 x 0.071	2.5	87	44	0.5	55
D-9081226				3	77	46	0.6	58
D-9081426				3.5	62	43	0.7	54
D-9084826				12	18	43	2.4	53
D-9100426				1	431	85	0.2	106
D-9100526				1.25	348	88	0.25	110
D-9100626				1.5	278	83	0.3	104
D-9100726	5/8	11/32		1.75	247	86	0.35	107
D-9100826				2	205	82	0.4	103
D-9101026	0.625	0.344	0.117 x 0.096	2.5	165	83	0.5	104
D-9101226				3	140	84	0.6	105
D-9101426				3.5	119	83	0.7	104
D-9101626				4	104	84	0.8	104
D-9104826				12	33	80	2.4	100
D-9120426				1	1370	270	0.2	337
D-9120526				1.25	1030	260	0.25	324
D-9120626				1.5	822	246	0.3	307
D-9120726				1.75	685	237	0.35	297
D-9120826				2	578	232	0.4	290
D-9121026				2.5	440	222	0.5	277
D-9121226	3/4	3/8		3	362	217	0.6	271
D-9121426				3.5	308	216	0.7	270
D-9121626	0.75	0.375	0.158 x 0.138	4	268	215	0.8	269
D-9121826				4.5	237	213	0.9	266
D-9122026				5	212	212	1	265
D-9122226				5.5	193	213	1.1	266
D-9122426				6	176	211	1.2	263
D-9124826				12	86	207	2.4	258
D-9160426				1	2150	423	0.2	529
D-9160526				1.25	1630	411	0.25	513
D-9160626				1.5	1270	380	0.3	475
D-9160726				1.75	1090	378	0.35	472
D-9160826				2	894	359	0.4	449
D-9161026				2.5	691	348	0.5	435
D-9161226	1	1/2		3	570	341	0.6	426
D-9161426				3.5	480	336	0.7	420
D-9161626	1.000	0.500	0.216 x 0.165	4	418	336	0.8	420
D-9161826				4.5	371	333	0.9	416
D-9162026				5	331	331	1	414
D-9162226				5.5	300	331	1.1	413
D-9162426				6	275	329	1.2	411
D-9162826				7	235	329	1.4	412
D-9163226				8	205	328	1.6	410
D-9164826				12	138	331	2.4	414

* Loads near solid lengths for reference only; overstressed condition.

Download CAD models or order online on our website centuryspring.com

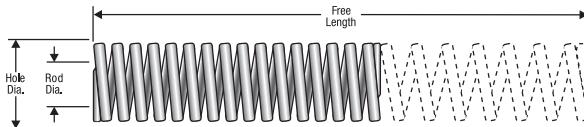


Die Springs HEAVY LOAD CHROME SILICON (RED)

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Dia. Inches	Free Length Inches	Rate Lbs./In.	Deflection for Long Life 20% of Free Length		Deflection for Average Life 25% of Free Length		Approx. Max. Deflection* 30% of Free Length	
						Force Lbs.	Defl. In.	Force Lbs.	Defl. In.	Force Lbs.	Defl. In.
D-9200626				1.5	2230	667	0.3	834	0.37	1001	0.45
D-9200726				1.75	1820	631	0.35	788	0.43	946	0.52
D-9200826				2	1540	618	0.4	773	0.5	928	0.6
D-9201026				2.5	1170	590	0.5	737	0.63	884	0.76
D-9201226				3	947	567	0.6	708	0.75	850	0.9
D-9201426	1-1/4	5/8		3.5	801	561	0.7	702	0.88	842	1.05
D-9201626				4	691	555	0.8	694	1	832	1.2
D-9201826	1.25	0.625	0.276 x 0.209	4.5	607	545	0.9	681	1.12	817	1.35
D-9202026				5	547	547	1	684	1.25	821	1.5
D-9202226				5.5	493	543	1.1	679	1.38	815	1.65
D-9202426				6	449	537	1.2	672	1.5	806	1.8
D-9202826				7	381	534	1.4	668	1.75	801	2.1
D-9203226				8	330	527	1.6	659	2	791	2.4
D-9204026				10	264	528	2	660	2.5	792	3
D-9204826				12	218	524	2.4	654	3	785	3.6
D-9240826				2	2080	835	0.4	1044	0.5	1253	0.6
D-9241026				2.5	1530	771	0.5	964	0.63	1157	0.76
D-9241226				3	1250	748	0.6	935	0.75	1122	0.9
D-9241426				3.5	1050	736	0.7	920	0.88	1104	1.05
D-9241626	1-1/2	3/4		4	906	728	0.8	910	1	1091	1.2
D-9241826				4.5	804	722	0.9	902	1.12	1083	1.35
D-9242026	1.500	0.75	0.328 x 0.245	5	715	715	1	894	1.25	1073	1.5
D-9242226				5.5	643	709	1.1	886	1.38	1063	1.65
D-9242426				6	590	706	1.2	883	1.5	1059	1.8
D-9242826				7	503	705	1.4	881	1.75	1057	2.1
D-9243226				8	438	700	1.6	875	2	1050	2.4
D-9244026				10	346	692	2	865	2.5	1038	3
D-9244826				12	287	689	2.4	862	3	1034	3.6
D-9321026				2.5	2420	1220	0.5	1524	0.63	1829	0.76
D-9321226				3	1930	1155	0.6	1444	0.75	1732	0.9
D-9321426				3.5	1600	1121	0.7	1402	0.88	1682	1.05
D-9321626				4	1400	1124	0.8	1406	1	1687	1.2
D-9321826				4.5	1230	1104	0.9	1380	1.12	1656	1.35
D-9322026	2	1		5	1080	1080	1	1350	1.25	1620	1.5
D-9322226				5.5	964	1063	1.1	1328	1.38	1594	1.65
D-9322426	2.000	1.000	0.45 x 0.292	6	880	1053	1.2	1317	1.5	1580	1.8
D-9322826				7	750	1051	1.4	1314	1.75	1577	2.1
D-9323226				8	653	1044	1.6	1305	2	1566	2.4
D-9324026				10	513	1026	2	1283	2.5	1539	3
D-9324826				12	426	1023	2.4	1279	3	1535	3.6

Die Springs EXTRA HEAVY LOAD CHROME SILICON (YELLOW)

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Dia. Inches	Free Length Inches	Rate Lbs./In.	Deflection for Long Life 17% of Free Length		Deflection for Average Life 20% of Free Length		Approx. Max. Deflection* 25% of Free Length	
						Force Lbs.	Defl. In.	Force Lbs.	Defl. In.	Force Lbs.	Defl. In.
D-9060436				1	187	31	0.17	37	0.2	46	0.25
D-9060536				1.25	146	31	0.21	37	0.25	46	0.31
D-9060636	3/8	3/16		1.5	121	31	0.25	36	0.3	45	0.37
D-9060736				1.75	101	30	0.29	35	0.35	44	0.43
D-9060836	0.375	0.187	0.073 x 0.063	2	88	30	0.34	35	0.4	44	0.5
D-9061036				2.5	70	30	0.43	35	0.5	44	0.63
D-9061236				3	58	30	0.51	35	0.6	43	0.75
D-9064836				12	14	29	2.04	34	2.4	42	3
D-9080436				1	335	56	0.17	66	0.2	82	0.25
D-9080536				1.25	252	54	0.21	63	0.25	79	0.31
D-9080636				1.5	207	53	0.25	62	0.3	77	0.37
D-9080736	1/2	9/32		1.75	175	52	0.29	61	0.35	76	0.43
D-9080836				2	154	53	0.34	62	0.4	77	0.5
D-9081036	0.5	0.281	0.093 x 0.088	2.5	124	53	0.43	62	0.5	78	0.63
D-9081236				3	101	51	0.51	60	0.6	76	0.75
D-9081436				3.5	86	51	0.6	60	0.7	75	0.88
D-9084836				12	24	49	2.04	58	2.4	72	3
D-9100436				1	727	122	0.17	143	0.2	179	0.25
D-9100536				1.25	537	115	0.21	135	0.25	169	0.31
D-9100636				1.5	433	110	0.25	130	0.3	162	0.37
D-9100736	5/8	11/32		1.75	363	107	0.29	126	0.35	157	0.43
D-9100836				2	317	108	0.34	127	0.4	159	0.5
D-9101036	0.625	0.344	0.123 x 0.115	2.5	247	106	0.43	124	0.5	156	0.63
D-9101236				3	203	103	0.51	121	0.6	152	0.75
D-9101436				3.5	173	103	0.6	121	0.7	152	0.88
D-9101636				4	151	103	0.68	121	0.8	152	1
D-9104836				12	49	100	2.04	117	2.4	146	3

* Loads near solid lengths for reference only; overstressed condition.

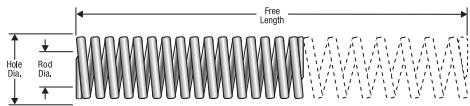


Century Spring

Die Springs EXTRA HEAVY LOAD CHROME SILICON (YELLOW)

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Dia. Inches	Free Length Inches	Rate Lbs./In.	Deflection for Long Life 17% of Free Length		Deflection for Average Life 20% of Free Length		Approx. Max. Deflection* 25% of Free Length	
						Force Lbs.	Defl. In.	Force Lbs.	Defl. In.	Force Lbs.	Defl. In.
D-9120436				1	1830	306	0.17	360	0.2	450	0.25
D-9120536				1.25	1370	293	0.21	345	0.25	431	0.31
D-9120636				1.5	1110	282	0.25	332	0.3	415	0.37
D-9120736				1.75	924	272	0.29	320	0.35	400	0.43
D-9120836	3/4	3/8	0.16 x 0.155	2	797	272	0.34	320	0.4	400	0.5
D-9121036				2.5	621	266	0.43	313	0.5	391	0.63
D-9121236	0.75	0.375	0.16 x 0.155	3	512	260	0.51	306	0.6	383	0.75
D-9121436				3.5	432	257	0.6	303	0.7	378	0.88
D-9121636				4	373	255	0.68	300	0.8	374	1
D-9121836				4.5	328	250	0.76	294	0.9	368	1.12
D-9122036				5	295	251	0.85	295	1	369	1.25
D-9122236				5.5	266	249	0.94	293	1.1	367	1.38
D-9122436				6	243	247	1.02	291	1.2	364	1.5
D-9124836				12	120	245	2.04	288	2.4	360	3
D-9160536				1.25	2020	433	0.21	509	0.25	636	0.31
D-9160636				1.5	1600	407	0.25	479	0.3	598	0.37
D-9160736				1.75	1320	389	0.29	457	0.35	572	0.43
D-9160836				2	1130	386	0.34	454	0.4	567	0.5
D-9161036				2.5	878	376	0.43	442	0.5	553	0.63
D-9161236				3	714	363	0.51	427	0.6	534	0.75
D-9161436	1	1/2	0.215 x 0.182	3.5	602	359	0.6	422	0.7	527	0.88
D-9161636				4	520	355	0.68	418	0.8	522	1
D-9161836	1.000	0.500	0.215 x 0.182	4.5	462	353	0.76	415	0.9	518	1.12
D-9162036				5	412	350	0.85	412	1	515	1.25
D-9162236				5.5	375	351	0.94	413	1.1	516	1.38
D-9162436				6	344	351	1.02	413	1.2	516	1.5
D-9162836				7	293	349	1.19	410	1.4	513	1.75
D-9163236				8	255	347	1.36	408	1.6	510	2
D-9164836				12	169	345	2.04	406	2.4	507	3
D-9200636				1.5	2790	710	0.25	835	0.3	1044	0.37
D-9200736				1.75	2310	680	0.29	800	0.35	1000	0.43
D-9200836				2	1970	672	0.34	791	0.4	989	0.5
D-9201036				2.5	1520	651	0.43	766	0.5	957	0.63
D-9201236				3	1230	626	0.51	736	0.6	920	0.75
D-9201436	1-1/4	5/8	0.28 x 0.226	3.5	1040	619	0.6	729	0.7	911	0.88
D-9201636				4	889	607	0.68	714	0.8	893	1
D-9201836	1.25	0.625	0.28 x 0.226	4.5	775	591	0.76	696	0.9	870	1.12
D-9202036				5	696	592	0.85	696	1	870	1.25
D-9202236				5.5	636	596	0.94	701	1.1	876	1.38
D-9202436				6	576	586	1.02	689	1.2	862	1.5
D-9202836				7	489	583	1.19	685	1.4	857	1.75
D-9203236				8	426	579	1.36	681	1.6	851	2
D-9204036				10	340	578	1.7	680	2	850	2.5
D-9204836				12	283	578	2.04	680	2.4	850	3
D-9240836				2	3190	1089	0.34	1281	0.4	1601	0.5
D-9241036				2.5	2410	1032	0.43	1214	0.5	1518	0.63
D-9241236				3	1930	982	0.51	1155	0.6	1444	0.75
D-9241436				3.5	1600	953	0.6	1121	0.7	1402	0.88
D-9241636	1-1/2	3/4	0.332 x 0.287	4	1390	949	0.68	1116	0.8	1395	1
D-9241836				4.5	1220	931	0.76	1095	0.9	1369	1.12
D-9242036	1.5	0.75	0.332 x 0.287	5	1080	918	0.85	1080	1	1350	1.25
D-9242236				5.5	976	915	0.94	1076	1.1	1345	1.38
D-9242436				6	887	902	1.02	1062	1.2	1327	1.5
D-9242836				7	750	894	1.19	1051	1.4	1314	1.75
D-9243236				8	650	883	1.36	1039	1.6	1299	2
D-9244036				10	516	877	1.7	1032	2	1290	2.5
D-9244836				12	428	874	2.04	1028	2.4	1285	3
D-9321036				2.5	4140	1773	0.43	2086	0.5	2608	0.63
D-9321236				3	3270	1663	0.51	1957	0.6	2446	0.75
D-9321436				3.5	2710	1614	0.6	1899	0.7	2374	0.88
D-9321636				4	2310	1577	0.68	1855	0.8	2319	1
D-9321836	2	1	0.452 x 0.349	4.5	2010	1534	0.76	1804	0.9	2255	1.12
D-9322036				5	1790	1522	0.85	1790	1	2238	1.25
D-9322236	2.000	1.000	0.452 x 0.349	5.5	1610	1509	0.94	1775	1.1	2219	1.38
D-9322436				6	1450	1475	1.02	1735	1.2	2169	1.5
D-9322836				7	1230	1465	1.19	1724	1.4	2155	1.75
D-9323236				8	1060	1440	1.36	1694	1.6	2118	2
D-9324036				10	835	1420	1.7	1670	2	2088	2.5
D-9324836				12	689	1406	2.04	1655	2.4	2068	3


* Loads near solid lengths for reference only; overstressed condition.

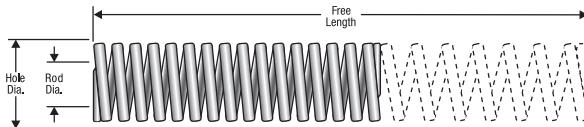

JIS Die Springs EXTRA LIGHT DUTY (YELLOW)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Rate kgf/mm	Max. Oper. Def. 50% Free Length Load kgf	Max. Oper. Def. 50% Free length Deflection mm	Long Life 45% Free Length Load kgf	Long Life 45% Free Length Deflection mm	Optimal Life 40% Free Length Load kgf	Optimal Life 40% Free Length Deflection mm
DJ-8X10Y	8.00	4.00	10.00	1.56	8.0	5.0	7.0	4.5	6.0	4.0
DJ-8X15Y			15.00	1.04	8.0	7.5	7.0	6.8	6.0	6.0
DJ-8X20Y			20.00	0.78	8.0	10.0	7.0	9.0	6.0	8.0
DJ-8X25Y			25.00	0.62	8.0	12.5	7.0	11.3	6.0	10.0
DJ-8X30Y			30.00	0.52	8.0	15.0	7.0	13.5	6.0	12.0
DJ-8X35Y			35.00	0.44	8.0	17.5	7.0	15.8	6.0	14.0
DJ-8X40Y			40.00	0.39	8.0	20.0	7.0	18.0	6.0	16.0
DJ-8X45Y			45.00	0.35	8.0	22.5	7.0	20.3	6.0	18.0
DJ-8X50Y			50.00	0.31	8.0	25.0	7.0	22.5	6.0	20.0
DJ-8X55Y			55.00	0.28	8.0	27.5	7.0	24.8	6.0	22.0
DJ-8X60Y			60.00	0.26	8.0	30.0	7.0	27.0	6.0	24.0
DJ-10X20Y	10.01	5.00	20.00	1.00	10.0	10.0	9.0	9.0	8.0	8.0
DJ-10X25Y			25.00	0.80	10.0	12.5	9.0	11.3	8.0	10.0
DJ-10X30Y			30.00	0.67	10.0	15.0	9.0	13.5	8.0	12.0
DJ-10X35Y			35.00	0.57	10.0	17.5	9.0	15.8	8.0	14.0
DJ-10X40Y			40.00	0.50	10.0	20.0	9.0	18.0	8.0	16.0
DJ-10X45Y			45.00	0.44	10.0	22.5	9.0	20.3	8.0	18.0
DJ-10X50Y			50.00	0.40	10.0	25.0	9.0	22.5	8.0	20.0
DJ-10X55Y			55.00	0.36	10.0	27.5	9.0	24.8	8.0	22.0
DJ-10X60Y			60.00	0.33	10.0	30.0	9.0	27.0	8.0	24.0
DJ-10X65Y			65.00	0.31	10.0	32.5	9.0	29.3	8.0	26.0
DJ-10X70Y			70.00	0.29	10.0	35.0	9.0	31.5	8.0	28.0
DJ-10X75Y			75.00	0.27	10.0	37.5	9.0	33.8	8.0	30.0
DJ-10X80Y			80.00	0.25	10.0	40.0	9.0	36.0	8.0	32.0
DJ-12X20Y	12.01	6.00	20.00	1.40	14.0	10.0	12.5	9.0	11.0	8.0
DJ-12X25Y			25.00	1.12	14.0	12.5	12.5	11.3	11.0	10.0
DJ-12X30Y			30.00	0.93	14.0	15.0	12.5	13.5	11.0	12.0
DJ-12X35Y			35.00	0.80	14.0	17.5	12.5	15.8	11.0	14.0
DJ-12X40Y			40.00	0.70	14.0	20.0	12.5	18.0	11.0	16.0
DJ-12X45Y			45.00	0.62	14.0	22.5	12.5	20.3	11.0	18.0
DJ-12X50Y			50.00	0.56	14.0	25.0	12.5	22.5	11.0	20.0
DJ-12X55Y			55.00	0.51	14.0	27.5	12.5	24.8	11.0	22.0
DJ-12X60Y			60.00	0.47	14.0	30.0	12.5	27.0	11.0	24.0
DJ-12X65Y			65.00	0.43	14.0	32.5	12.5	29.3	11.0	26.0
DJ-12X70Y			70.00	0.40	14.0	35.0	12.5	31.5	11.0	28.0
DJ-12X75Y			75.00	0.37	14.0	37.5	12.5	33.8	11.0	30.0
DJ-12X80Y			80.00	0.35	14.0	40.0	12.5	36.0	11.0	32.0
DJ-14X25Y	14.02	7.00	25.00	1.44	18.0	12.5	16.0	11.3	14.5	10.0
DJ-14X30Y			30.00	1.20	18.0	15.0	16.0	13.5	14.5	12.0
DJ-14X35Y			35.00	1.03	18.0	17.5	16.0	15.8	14.5	14.0
DJ-14X40Y			40.00	0.90	18.0	20.0	16.0	18.0	14.5	16.0
DJ-14X45Y			45.00	0.80	18.0	22.5	16.0	20.3	14.5	18.0
DJ-14X50Y			50.00	0.72	18.0	25.0	16.0	22.5	14.5	20.0
DJ-14X55Y			55.00	0.65	18.0	27.5	16.0	24.8	14.5	22.0
DJ-14X60Y			60.00	0.60	18.0	30.0	16.0	27.0	14.5	24.0
DJ-14X65Y			65.00	0.55	18.0	32.5	16.0	29.3	14.5	26.0
DJ-14X70Y			70.00	0.51	18.0	35.0	16.0	31.5	14.5	28.0
DJ-14X75Y			75.00	0.48	18.0	37.5	16.0	33.8	14.5	30.0
DJ-14X80Y			80.00	0.45	18.0	40.0	16.0	36.0	14.5	32.0
DJ-14X90Y			90.00	0.40	18.0	45.0	16.0	40.5	14.5	36.0
DJ-16X25Y	16.00	8.00	25.00	1.68	21.0	12.5	19.0	11.3	17.0	10.0
DJ-16X30Y			30.00	1.40	21.0	15.0	19.0	13.5	17.0	12.0
DJ-16X35Y			35.00	1.20	21.0	17.5	19.0	15.8	17.0	14.0
DJ-16X40Y			40.00	1.05	21.0	20.0	19.0	18.0	17.0	16.0
DJ-16X45Y			45.00	0.94	21.0	22.5	19.0	20.3	17.0	18.0
DJ-16X50Y			50.00	0.84	21.0	25.0	19.0	22.5	17.0	20.0
DJ-16X55Y			55.00	0.77	21.0	27.5	19.0	24.8	17.0	22.0
DJ-16X60Y			60.00	0.70	21.0	30.0	19.0	27.0	17.0	24.0
DJ-16X65Y			65.00	0.65	21.0	32.5	19.0	29.3	17.0	26.0
DJ-16X70Y			70.00	0.60	21.0	35.0	19.0	31.5	17.0	28.0
DJ-16X75Y			75.00	0.56	21.0	37.5	19.0	33.8	17.0	30.0
DJ-16X80Y			80.00	0.53	21.0	40.0	19.0	36.0	17.0	32.0
DJ-16X90Y			90.00	0.47	21.0	45.0	19.0	40.5	17.0	36.0
DJ-16X100Y			100.00	0.42	21.0	50.0	19.0	45.0	17.0	40.0
DJ-18X25Y	18.01	9.00	25.00	2.08	26.0	12.5	23.0	11.3	21.0	10.0
DJ-18X30Y			30.00	1.74	26.0	15.0	23.0	13.5	21.0	12.0
DJ-18X35Y			35.00	1.49	26.0	17.5	23.0	15.8	21.0	14.0
DJ-18X40Y			40.00	1.30	26.0	20.0	23.0	18.0	21.0	16.0
DJ-18X45Y			45.00	1.16	26.0	22.5	23.0	20.3	21.0	18.0
DJ-18X50Y			50.00	1.04	26.0	25.0	23.0	22.5	21.0	20.0
DJ-18X55Y			55.00	0.95	26.0	27.5	23.0	24.8	21.0	22.0
DJ-18X60Y			60.00	0.87	26.0	30.0	23.0	27.0	21.0	24.0
DJ-18X65Y			65.00	0.80	26.0	32.5	23.0	29.3	21.0	26.0
DJ-18X70Y			70.00	0.74	26.0	35.0	23.0	31.5	21.0	28.0
DJ-18X75Y			75.00	0.70	26.0	37.5	23.0	33.8	21.0	30.0

* Loads near solid lengths for reference only; overstressed condition.

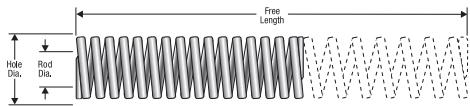


Century Spring

JIS Die Springs EXTRA LIGHT DUTY (YELLOW)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Rate kgf/mm	Max. Oper. Def. 50% Free Length Load kgf	Max. Oper. Def. 50% Free length Deflection mm	Long Life 45% Free Length Load kgf	Long Life 45% Free Length Deflection mm	Optimal Life 40% Free Length Load kgf	Optimal Life 40% Free Length Deflection mm
DJ-18X80Y	18.01	9.00	80.00	0.65	26.0	40.0	23.0	36.0	21.0	32.0
DJ-18X90Y			90.00	0.58	26.0	45.0	23.0	40.5	21.0	36.0
DJ-18X100Y			100.00	0.52	26.0	50.0	23.0	45.0	21.0	40.0
DJ-20X25Y	20.02	11.00	25.00	2.56	32.0	12.5	29.0	11.3	26.0	10.0
DJ-20X30Y			30.00	2.13	32.0	15.0	29.0	13.5	26.0	12.0
DJ-20X35Y			35.00	1.83	32.0	17.5	29.0	15.8	26.0	14.0
DJ-20X40Y			40.00	1.60	32.0	20.0	29.0	18.0	26.0	16.0
DJ-20X45Y			45.00	1.42	32.0	22.5	29.0	20.3	26.0	18.0
DJ-20X50Y			50.00	1.28	32.0	25.0	29.0	22.5	26.0	20.0
DJ-20X55Y			55.00	1.16	32.0	27.5	29.0	24.8	26.0	22.0
DJ-20X60Y	20.02	11.00	60.00	1.07	32.0	30.0	29.0	27.0	26.0	24.0
DJ-20X65Y			65.00	0.98	32.0	32.5	29.0	29.3	26.0	26.0
DJ-20X70Y			70.00	0.91	32.0	35.0	29.0	31.5	26.0	28.0
DJ-20X75Y			75.00	0.85	32.0	37.5	29.0	33.8	26.0	30.0
DJ-20X80Y			80.00	0.80	32.0	40.0	29.0	36.0	26.0	32.0
DJ-20X90Y			90.00	0.71	32.0	45.0	29.0	40.5	26.0	36.0
DJ-20X100Y			100.00	0.64	32.0	50.0	29.0	45.0	26.0	40.0
DJ-20X125Y	22.02	11.00	125.00	0.51	32.0	62.5	29.0	56.3	26.0	50.0
DJ-20X150Y			150.00	0.43	32.0	75.0	29.0	67.5	26.0	60.0
DJ-22X25Y			25.00	3.20	40.0	12.5	36.0	11.3	32.0	10.0
DJ-22X30Y			30.00	2.67	40.0	15.0	36.0	13.5	32.0	12.0
DJ-22X35Y			35.00	2.29	40.0	17.5	36.0	15.8	32.0	14.0
DJ-22X40Y			40.00	2.00	40.0	20.0	36.0	18.0	32.0	16.0
DJ-22X45Y			45.00	1.78	40.0	22.5	36.0	20.3	32.0	18.0
DJ-22X50Y	22.02	11.00	50.00	1.60	40.0	25.0	36.0	22.5	32.0	20.0
DJ-22X55Y			55.00	1.46	40.0	27.5	36.0	24.8	32.0	22.0
DJ-22X60Y			60.00	1.33	40.0	30.0	36.0	27.0	32.0	24.0
DJ-22X65Y			65.00	1.23	40.0	32.5	36.0	29.3	32.0	26.0
DJ-22X70Y			70.00	1.14	40.0	35.0	36.0	31.5	32.0	28.0
DJ-22X75Y			75.00	1.07	40.0	37.5	36.0	33.8	32.0	30.0
DJ-22X80Y			80.00	1.00	40.0	40.0	36.0	36.0	32.0	32.0
DJ-22X90Y	22.02	11.00	90.00	0.89	40.0	45.0	36.0	40.5	32.0	36.0
DJ-22X100Y			100.00	0.80	40.0	50.0	36.0	45.0	32.0	40.0
DJ-22X125Y			125.00	0.64	40.0	62.5	36.0	56.3	32.0	50.0
DJ-22X150Y			150.00	0.53	40.0	75.0	36.0	67.5	32.0	60.0
DJ-25X25Y	25.02	13.50	25.00	4.00	50.0	12.5	45.0	11.3	40.0	10.0
DJ-25X30Y			30.00	3.33	50.0	15.0	45.0	13.5	40.0	12.0
DJ-25X35Y			35.00	2.85	50.0	17.5	45.0	15.8	40.0	14.0
DJ-25X40Y			40.00	2.50	50.0	20.0	45.0	18.0	40.0	16.0
DJ-25X45Y			45.00	2.22	50.0	22.5	45.0	20.3	40.0	18.0
DJ-25X50Y			50.00	2.00	50.0	25.0	45.0	22.5	40.0	20.0
DJ-25X55Y			55.00	1.82	50.0	27.5	45.0	24.8	40.0	22.0
DJ-25X60Y	25.02	13.50	60.00	1.67	50.0	30.0	45.0	27.0	40.0	24.0
DJ-25X65Y			65.00	1.54	50.0	32.5	45.0	29.3	40.0	26.0
DJ-25X70Y			70.00	1.43	50.0	35.0	45.0	31.5	40.0	28.0
DJ-25X75Y			75.00	1.33	50.0	37.5	45.0	33.8	40.0	30.0
DJ-25X80Y			80.00	1.25	50.0	40.0	45.0	36.0	40.0	32.0
DJ-25X90Y			90.00	1.11	50.0	45.0	45.0	40.5	40.0	36.0
DJ-25X100Y			100.00	1.00	50.0	50.0	45.0	45.0	40.0	40.0
DJ-25X125Y	27.00	13.50	125.00	0.80	50.0	62.5	45.0	56.3	40.0	50.0
DJ-25X150Y			150.00	0.67	50.0	75.0	45.0	67.5	40.0	60.0
DJ-25X175Y			175.00	0.57	50.0	87.5	45.0	78.8	40.0	70.0
DJ-27X25Y			25.00	4.80	60.0	12.5	54.0	11.3	48.0	10.0
DJ-27X30Y			30.00	4.00	60.0	15.0	54.0	13.5	48.0	12.0
DJ-27X35Y			35.00	3.43	60.0	17.5	54.0	15.8	48.0	14.0
DJ-27X40Y			40.00	3.00	60.0	20.0	54.0	18.0	48.0	16.0
DJ-27X45Y	27.00	13.50	45.00	2.67	60.0	22.5	54.0	20.3	48.0	18.0
DJ-27X50Y			50.00	2.40	60.0	25.0	54.0	22.5	48.0	20.0
DJ-27X55Y			55.00	2.18	60.0	27.5	54.0	24.8	48.0	22.0
DJ-27X60Y			60.00	2.00	60.0	30.0	54.0	27.0	48.0	24.0
DJ-27X65Y			65.00	1.85	60.0	32.5	54.0	29.3	48.0	26.0
DJ-27X70Y			70.00	1.71	60.0	35.0	54.0	31.5	48.0	28.0
DJ-27X75Y			75.00	1.60	60.0	37.5	54.0	33.8	48.0	30.0
DJ-27X80Y	27.00	13.50	80.00	1.50	60.0	40.0	54.0	36.0	48.0	32.0
DJ-27X90Y			90.00	1.33	60.0	45.0	54.0	40.5	48.0	36.0
DJ-27X100Y			100.00	1.20	60.0	50.0	54.0	45.0	48.0	40.0
DJ-27X125Y			125.00	0.96	60.0	62.5	54.0	56.3	48.0	50.0
DJ-27X150Y			150.00	0.80	60.0	75.0	54.0	67.5	48.0	60.0
DJ-27X175Y			175.00	0.69	60.0	87.5	54.0	78.8	48.0	70.0


* Loads near solid lengths for reference only; overstressed condition.

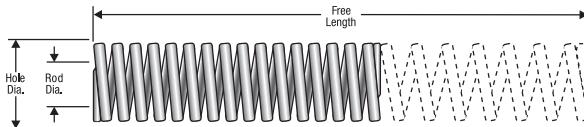

JIS Die Springs EXTRA LIGHT DUTY (YELLOW)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Rate kgf/mm	Max. Oper. Def. 50% Free Length Load kgf	Max. Oper. Def. 50% Free length Deflection mm	Long Life 45% Free Length Load kgf	Long Life 45% Free Length Deflection mm	Optimal Life 40% Free Length Load kgf	Optimal Life 40% Free Length Deflection mm
DJ-30X25Y	30.02	16.00	25.00	5.80	72.0	12.5	65.0	11.3	58.0	10.0
DJ-30X30Y			30.00	4.80	72.0	15.0	65.0	13.5	58.0	12.0
DJ-30X35Y			35.00	4.13	72.0	17.5	65.0	15.8	58.0	14.0
DJ-30X40Y			40.00	3.60	72.0	20.0	65.0	18.0	58.0	16.0
DJ-30X45Y			45.00	3.21	72.0	22.5	65.0	20.3	58.0	18.0
DJ-30X50Y			50.00	2.88	72.0	25.0	65.0	22.5	58.0	20.0
DJ-30X55Y			55.00	2.63	72.0	27.5	65.0	24.8	58.0	22.0
DJ-30X60Y			60.00	2.40	72.0	30.0	65.0	27.0	58.0	24.0
DJ-30X65Y			65.00	2.22	72.0	32.5	65.0	29.3	58.0	26.0
DJ-30X70Y			70.00	2.05	72.0	35.0	65.0	31.5	58.0	28.0
DJ-30X75Y			75.00	1.93	72.0	37.5	65.0	33.8	58.0	30.0
DJ-30X80Y			80.00	1.80	72.0	40.0	65.0	36.0	58.0	32.0
DJ-30X90Y			90.00	1.60	72.0	45.0	65.0	40.5	58.0	36.0
DJ-30X100Y			100.00	1.44	72.0	50.0	65.0	45.0	58.0	40.0
DJ-30X125Y			125.00	1.15	72.0	62.5	65.0	56.3	58.0	50.0
DJ-30X150Y			150.00	0.96	72.0	75.0	65.0	67.5	58.0	60.0
DJ-30X175Y			175.00	0.82	72.0	87.5	65.0	78.8	58.0	70.0
DJ-30X200Y			200.00	0.72	72.0	100.0	65.0	90.0	58.0	80.0
DJ-35X40Y	35.00	19.00	40.00	4.90	98.0	20.0	88.0	18.0	78.0	16.0
DJ-35X45Y			45.00	4.36	98.0	22.5	88.0	20.3	78.0	18.0
DJ-35X50Y			50.00	3.92	98.0	25.0	88.0	22.5	78.0	20.0
DJ-35X55Y			55.00	3.56	98.0	27.5	88.0	24.8	78.0	22.0
DJ-35X60Y			60.00	3.26	98.0	30.0	88.0	27.0	78.0	24.0
DJ-35X65Y			65.00	3.02	98.0	32.5	88.0	29.3	78.0	26.0
DJ-35X70Y			70.00	2.80	98.0	35.0	88.0	31.5	78.0	28.0
DJ-35X75Y			75.00	2.61	98.0	37.5	88.0	33.8	78.0	30.0
DJ-35X80Y			80.00	2.45	98.0	40.0	88.0	36.0	78.0	32.0
DJ-35X90Y			90.00	2.17	98.0	45.0	88.0	40.5	78.0	36.0
DJ-35X100Y			100.00	1.96	98.0	50.0	88.0	45.0	78.0	40.0
DJ-35X125Y			125.00	1.57	98.0	62.5	88.0	56.3	78.0	50.0
DJ-35X150Y			150.00	1.30	98.0	75.0	88.0	67.5	78.0	60.0
DJ-35X175Y			175.00	1.12	98.0	87.5	88.0	78.8	78.0	70.0
DJ-35X200Y			200.00	0.98	98.0	100.0	88.0	90.0	78.0	80.0
DJ-40X40Y	40.01	22.00	40.00	6.38	128.0	20.0	115.0	18.0	102.0	16.0
DJ-40X50Y			50.00	5.12	128.0	25.0	115.0	22.5	102.0	20.0
DJ-40X60Y			60.00	4.26	128.0	30.0	115.0	27.0	102.0	24.0
DJ-40X70Y			70.00	3.65	128.0	35.0	115.0	31.5	102.0	28.0
DJ-40X80Y			80.00	3.20	128.0	40.0	115.0	36.0	102.0	32.0
DJ-40X90Y			90.00	2.84	128.0	45.0	115.0	40.5	102.0	36.0
DJ-40X100Y			100.00	2.56	128.0	50.0	115.0	45.0	102.0	40.0
DJ-40X125Y			125.00	2.04	128.0	62.5	115.0	56.3	102.0	50.0
DJ-40X150Y			150.00	1.70	128.0	75.0	115.0	67.5	102.0	60.0
DJ-40X175Y			175.00	1.46	128.0	87.5	115.0	78.8	102.0	70.0
DJ-40X200Y			200.00	1.28	128.0	100.0	115.0	90.0	102.0	80.0
DJ-40X250Y			250.00	1.02	128.0	125.0	115.0	112.5	102.0	100.0
DJ-50X50Y	50.01	25.00	50.00	8.00	200.0	25.0	180.0	22.5	160.0	20.0
DJ-50X60Y			60.00	6.66	200.0	30.0	180.0	27.0	160.0	24.0
DJ-50X70Y			70.00	5.71	200.0	35.0	180.0	31.5	160.0	28.0
DJ-50X80Y			80.00	5.00	200.0	40.0	180.0	36.0	160.0	32.0
DJ-50X90Y			90.00	4.44	200.0	45.0	180.0	40.5	160.0	36.0
DJ-50X100Y			100.00	4.00	200.0	50.0	180.0	45.0	160.0	40.0
DJ-50X125Y			125.00	3.20	200.0	62.5	180.0	56.3	160.0	50.0
DJ-50X150Y			150.00	2.66	200.0	75.0	180.0	67.5	160.0	60.0
DJ-50X175Y			175.00	2.28	200.0	87.5	180.0	78.8	160.0	70.0
DJ-50X200Y			200.00	2.00	200.0	100.0	180.0	90.0	160.0	80.0
DJ-50X250Y			250.00	1.60	200.0	125.0	180.0	112.5	160.0	100.0
DJ-50X300Y			300.00	1.33	200.0	150.0	180.0	135.0	160.0	120.0
DJ-50X350Y			350.00	1.14	200.0	175.0	180.0	157.5	160.0	140.0
DJ-50X400Y			400.00	1.00	200.0	200.0	180.0	180.0	160.0	160.0
DJ-50X450Y			450.00	0.89	200.0	225.0	180.0	202.5	160.0	180.0
DJ-50X500Y			500.00	0.80	200.0	250.0	180.0	225.0	160.0	200.0
DJ-60X60Y	60.02	33.00	60.00	9.59	288.0	30.0	259.0	27.0	230.0	24.0
DJ-60X70Y			70.00	8.22	288.0	35.0	259.0	31.5	230.0	28.0
DJ-60X80Y			80.00	7.19	288.0	40.0	259.0	36.0	230.0	32.0
DJ-60X90Y			90.00	6.40	288.0	45.0	259.0	40.5	230.0	36.0
DJ-60X100Y			100.00	5.76	288.0	50.0	259.0	45.0	230.0	40.0
DJ-60X125Y			125.00	4.60	288.0	62.5	259.0	56.3	230.0	50.0
DJ-60X150Y			150.00	3.84	288.0	75.0	259.0	67.5	230.0	60.0
DJ-60X175Y			175.00	3.29	288.0	87.5	259.0	78.8	230.0	70.0
DJ-60X200Y			200.00	2.88	288.0	100.0	259.0	90.0	230.0	80.0
DJ-60X250Y			250.00	2.30	288.0	125.0	259.0	112.5	230.0	100.0
DJ-60X300Y			300.00	1.92	288.0	150.0	259.0	135.0	230.0	120.0
DJ-60X350Y			350.00	1.65	288.0	175.0	259.0	157.5	230.0	140.0
DJ-60X400Y			400.00	1.44	288.0	200.0	259.0	180.0	230.0	160.0
DJ-60X450Y			450.00	1.28	288.0	225.0	259.0	202.5	230.0	180.0
DJ-60X500Y			500.00	1.15	288.0	250.0	259.0	225.0	230.0	200.0


* Loads near solid lengths for reference only; overstressed condition.

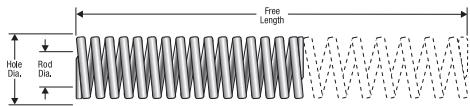

Century Spring

JIS Die Springs LIGHT DUTY (BLUE)


Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Rate kgf/mm	Max. Oper. Def. 40% Free Length Load kgf	Max. Oper. Def. 40% Free length Deflection mm	Long Life 36% Free Length Load kgf	Long Life 36% Free Length Deflection mm	Optimal Life 32% Free Length Load kgf	Optimal Life 32% Free Length Deflection mm
DJ-8X10B			10.00	2.50	10.0	4.0	9.0	3.6	8.0	3.2
DJ-8X15B			15.00	1.67	10.0	6.0	9.0	5.4	8.0	4.8
DJ-8X20B			20.00	1.25	10.0	8.0	9.0	7.2	8.0	6.4
DJ-8X25B			25.00	1.00	10.0	10.0	9.0	9.0	8.0	8.0
DJ-8X30B			30.00	0.83	10.0	12.0	9.0	10.8	8.0	9.6
DJ-8X35B	8.00	4.00	35.00	0.71	10.0	14.0	9.0	12.6	8.0	11.2
DJ-8X40B			40.00	0.63	10.0	16.0	9.0	14.4	8.0	12.8
DJ-8X45B			45.00	0.56	10.0	18.0	9.0	16.2	8.0	14.4
DJ-8X50B			50.00	0.50	10.0	20.0	9.0	18.0	8.0	16.0
DJ-8X55B			55.00	0.46	10.0	22.0	9.0	19.8	8.0	17.6
DJ-8X60B			60.00	0.42	10.0	24.0	9.0	21.6	8.0	19.2
DJ-10X20B			20.00	1.81	14.5	8.0	13.0	7.2	11.5	6.4
DJ-10X25B			25.00	1.45	14.5	10.0	13.0	9.0	11.5	8.0
DJ-10X30B			30.00	1.21	14.5	12.0	13.0	10.8	11.5	9.6
DJ-10X35B			35.00	1.03	14.5	14.0	13.0	12.6	11.5	11.2
DJ-10X40B			40.00	0.90	14.5	16.0	13.0	14.4	11.5	12.8
DJ-10X45B			45.00	0.80	14.5	18.0	13.0	16.2	11.5	14.4
DJ-10X50B			50.00	0.73	14.5	20.0	13.0	18.0	11.5	16.0
DJ-10X55B	10.01	5.00	55.00	0.66	14.5	22.0	13.0	19.8	11.5	17.6
DJ-10X60B			60.00	0.60	14.5	24.0	13.0	21.6	11.5	19.2
DJ-10X65B			65.00	0.55	14.5	26.0	13.0	23.4	11.5	20.8
DJ-10X70B			70.00	0.51	14.5	28.0	13.0	25.2	11.5	22.4
DJ-10X75B			75.00	0.48	14.5	30.0	13.0	27.0	11.5	24.0
DJ-10X80B			80.00	0.45	14.5	32.0	13.0	28.8	11.5	25.6
DJ-12X20B			20.00	2.63	21.0	8.0	19.0	7.2	17.0	6.4
DJ-12X25B			25.00	2.10	21.0	10.0	19.0	9.0	17.0	8.0
DJ-12X30B			30.00	1.75	21.0	12.0	19.0	10.8	17.0	9.6
DJ-12X35B			35.00	1.50	21.0	14.0	19.0	12.6	17.0	11.2
DJ-12X40B			40.00	1.32	21.0	16.0	19.0	14.4	17.0	12.8
DJ-12X45B			45.00	1.17	21.0	18.0	19.0	16.2	17.0	14.4
DJ-12X50B	12.01	6.00	50.00	1.05	21.0	20.0	19.0	18.0	17.0	16.0
DJ-12X55B			55.00	0.96	21.0	22.0	19.0	19.8	17.0	17.6
DJ-12X60B			60.00	0.88	21.0	24.0	19.0	21.6	17.0	19.2
DJ-12X65B			65.00	0.81	21.0	26.0	19.0	23.4	17.0	20.8
DJ-12X70B			70.00	0.75	21.0	28.0	19.0	25.2	17.0	22.4
DJ-12X75B			75.00	0.70	21.0	30.0	19.0	27.0	17.0	24.0
DJ-12X80B			80.00	0.66	21.0	32.0	19.0	28.8	17.0	25.6
DJ-14X25B			25.00	2.80	28.0	10.0	25.0	9.0	22.0	8.0
DJ-14X30B			30.00	2.34	28.0	12.0	25.0	10.8	22.0	9.6
DJ-14X35B			35.00	2.00	28.0	14.0	25.0	12.6	22.0	11.2
DJ-14X40B			40.00	1.75	28.0	16.0	25.0	14.4	22.0	12.8
DJ-14X45B			45.00	1.56	28.0	18.0	25.0	16.2	22.0	14.4
DJ-14X50B			50.00	1.40	28.0	20.0	25.0	18.0	22.0	16.0
DJ-14X55B	14.02	7.00	55.00	1.27	28.0	22.0	25.0	19.8	22.0	17.6
DJ-14X60B			60.00	1.17	28.0	24.0	25.0	21.6	22.0	19.2
DJ-14X65B			65.00	1.08	28.0	26.0	25.0	23.4	22.0	20.8
DJ-14X70B			70.00	1.00	28.0	28.0	25.0	25.2	22.0	22.4
DJ-14X75B			75.00	0.93	28.0	30.0	25.0	27.0	22.0	24.0
DJ-14X80B			80.00	0.87	28.0	32.0	25.0	28.8	22.0	25.6
DJ-14X90B			90.00	0.77	28.0	36.0	25.0	32.4	22.0	28.8
DJ-16X25B			25.00	3.50	35.0	10.0	32.0	9.0	28.0	8.0
DJ-16X30B			30.00	2.92	35.0	12.0	32.0	10.8	28.0	9.6
DJ-16X35B			35.00	2.50	35.0	14.0	32.0	12.6	28.0	11.2
DJ-16X40B			40.00	2.19	35.0	16.0	32.0	14.4	28.0	12.8
DJ-16X45B			45.00	1.95	35.0	18.0	32.0	16.2	28.0	14.4
DJ-16X50B	16.00	8.00	50.00	1.75	35.0	20.0	32.0	18.0	28.0	16.0
DJ-16X55B			55.00	1.60	35.0	22.0	32.0	19.8	28.0	17.6
DJ-16X60B			60.00	1.46	35.0	24.0	32.0	21.6	28.0	19.2
DJ-16X65B			65.00	1.35	35.0	26.0	32.0	23.4	28.0	20.8
DJ-16X70B			70.00	1.25	35.0	28.0	32.0	25.2	28.0	22.4
DJ-16X75B			75.00	1.17	35.0	30.0	32.0	27.0	28.0	24.0
DJ-16X80B			80.00	1.10	35.0	32.0	32.0	28.8	28.0	25.6
DJ-16X90B			90.00	0.98	35.0	36.0	32.0	32.4	28.0	28.8
DJ-16X100B			100.00	0.88	35.0	40.0	32.0	36.0	28.0	32.0
DJ-18X25B			25.00	4.30	43.0	10.0	39.0	9.0	34.0	8.0
DJ-18X30B			30.00	3.58	43.0	12.0	39.0	10.8	34.0	9.6
DJ-18X35B			35.00	3.07	43.0	14.0	39.0	12.6	34.0	11.2
DJ-18X40B			40.00	2.69	43.0	16.0	39.0	14.4	34.0	12.8
DJ-18X45B			45.00	2.39	43.0	18.0	39.0	16.2	34.0	14.4
DJ-18X50B	18.01	9.00	50.00	2.15	43.0	20.0	39.0	18.0	34.0	16.0
DJ-18X55B			55.00	1.96	43.0	22.0	39.0	19.8	34.0	17.6
DJ-18X60B			60.00	1.79	43.0	24.0	39.0	21.6	34.0	19.2
DJ-18X65B			65.00	1.66	43.0	26.0	39.0	23.4	34.0	20.8
DJ-18X70B			70.00	1.54	43.0	28.0	39.0	25.2	34.0	22.4
DJ-18X75B			75.00	1.44	43.0	30.0	39.0	27.0	34.0	24.0
DJ-18X80B			80.00	1.35	43.0	32.0	39.0	28.8	34.0	25.6
DJ-18X90B			90.00	1.20	43.0	36.0	39.0	32.4	34.0	28.8
DJ-18X100B			100.00	1.07	43.0	40.0	39.0	36.0	34.0	32.0

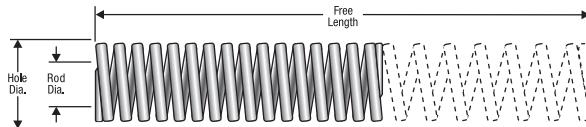

JIS Die Springs LIGHT DUTY (BLUE)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Rate kgf/mm	Max. Oper. Def. 40% Free Length Load kgf	Max. Oper. Def. 40% Free length Deflection mm	Long Life 36% Free Length Load kgf	Long Life 36% Free Length Deflection mm	Optimal Life 32% Free Length Load kgf	Optimal Life 32% Free Length Deflection mm
DJ-20X25B			25.00	5.40	54.0	10.0	49.0	9.0	43.0	8.0
DJ-20X30B			30.00	4.50	54.0	12.0	49.0	10.8	43.0	9.6
DJ-20X35B			35.00	3.86	54.0	14.0	49.0	12.6	43.0	11.2
DJ-20X40B			40.00	3.38	54.0	16.0	49.0	14.4	43.0	12.8
DJ-20X45B			45.00	3.00	54.0	18.0	49.0	16.2	43.0	14.4
DJ-20X50B			50.00	2.70	54.0	20.0	49.0	18.0	43.0	16.0
DJ-20X55B			55.00	2.45	54.0	22.0	49.0	19.8	43.0	17.6
DJ-20X60B	20.02	10.00	60.00	2.25	54.0	24.0	49.0	21.6	43.0	19.2
DJ-20X65B			65.00	2.08	54.0	26.0	49.0	23.4	43.0	20.8
DJ-20X70B			70.00	1.93	54.0	28.0	49.0	25.2	43.0	22.4
DJ-20X75B			75.00	1.80	54.0	30.0	49.0	27.0	43.0	24.0
DJ-20X80B			80.00	1.69	54.0	32.0	49.0	28.8	43.0	25.6
DJ-20X90B			90.00	1.50	54.0	36.0	49.0	32.4	43.0	28.8
DJ-20X100B			100.00	1.35	54.0	40.0	49.0	36.0	43.0	32.0
DJ-20X125B			125.00	1.08	54.0	50.0	49.0	45.0	43.0	40.0
DJ-20X150B			150.00	0.90	54.0	60.0	49.0	54.0	43.0	48.0
DJ-22X25B			25.00	6.70	67.0	10.0	60.0	9.0	54.0	8.0
DJ-22X30B			30.00	5.60	67.0	12.0	60.0	10.8	54.0	9.6
DJ-22X35B			35.00	4.80	67.0	14.0	60.0	12.6	54.0	11.2
DJ-22X40B			40.00	4.20	67.0	16.0	60.0	14.4	54.0	12.8
DJ-22X45B			45.00	3.72	67.0	18.0	60.0	16.2	54.0	14.4
DJ-22X50B			50.00	3.35	67.0	20.0	60.0	18.0	54.0	16.0
DJ-22X55B	22.02	11.00	55.00	3.05	67.0	22.0	60.0	19.8	54.0	17.6
DJ-22X60B			60.00	2.80	67.0	24.0	60.0	21.6	54.0	19.2
DJ-22X65B			65.00	2.58	67.0	26.0	60.0	23.4	54.0	20.8
DJ-22X70B			70.00	2.40	67.0	28.0	60.0	25.2	54.0	22.4
DJ-22X75B			75.00	2.23	67.0	30.0	60.0	27.0	54.0	24.0
DJ-22X80B			80.00	2.10	67.0	32.0	60.0	28.8	54.0	25.6
DJ-22X90B			90.00	1.86	67.0	36.0	60.0	32.4	54.0	28.8
DJ-22X100B			100.00	1.68	67.0	40.0	60.0	36.0	54.0	32.0
DJ-22X125B			125.00	1.34	67.0	50.0	60.0	45.0	54.0	40.0
DJ-22X150B			150.00	1.12	67.0	60.0	60.0	54.0	54.0	48.0
DJ-25X25B	25.02	12.50	25.00	8.40	84.0	10.0	76.0	9.0	67.0	8.0
DJ-25X30B			30.00	7.00	84.0	12.0	76.0	10.8	67.0	9.6
DJ-25X35B			35.00	6.00	84.0	14.0	76.0	12.6	67.0	11.2
DJ-25X40B			40.00	5.25	84.0	16.0	76.0	14.4	67.0	12.8
DJ-25X45B			45.00	4.67	84.0	18.0	76.0	16.2	67.0	14.4
DJ-25X50B			50.00	4.20	84.0	20.0	76.0	18.0	67.0	16.0
DJ-25X55B			55.00	3.82	84.0	22.0	76.0	19.8	67.0	17.6
DJ-25X60B			60.00	3.50	84.0	24.0	76.0	21.6	67.0	19.2
DJ-25X65B			65.00	3.23	84.0	26.0	76.0	23.4	67.0	20.8
DJ-25X70B			70.00	3.00	84.0	28.0	76.0	25.2	67.0	22.4
DJ-25X75B			75.00	2.80	84.0	30.0	76.0	27.0	67.0	24.0
DJ-25X80B			80.00	2.63	84.0	32.0	76.0	28.8	67.0	25.6
DJ-25X90B			90.00	2.33	84.0	36.0	76.0	32.4	67.0	28.8
DJ-25X100B			100.00	2.10	84.0	40.0	76.0	36.0	67.0	32.0
DJ-25X125B			125.00	1.68	84.0	50.0	76.0	45.0	67.0	40.0
DJ-25X150B			150.00	1.40	84.0	60.0	76.0	54.0	67.0	48.0
DJ-25X175B			175.00	1.20	84.0	70.0	76.0	63.0	67.0	56.0
DJ-27X25B	27.00	13.50	25.00	10.00	100.0	10.0	90.0	9.0	80.0	8.0
DJ-27X30B			30.00	8.33	100.0	12.0	90.0	10.8	80.0	9.6
DJ-27X35B			35.00	7.14	100.0	14.0	90.0	12.6	80.0	11.2
DJ-27X40B			40.00	6.25	100.0	16.0	90.0	14.4	80.0	12.8
DJ-27X45B			45.00	5.56	100.0	18.0	90.0	16.2	80.0	14.4
DJ-27X50B			50.00	5.00	100.0	20.0	90.0	18.0	80.0	16.0
DJ-27X55B			55.00	4.55	100.0	22.0	90.0	19.8	80.0	17.6
DJ-27X60B			60.00	4.17	100.0	24.0	90.0	21.6	80.0	19.2
DJ-27X65B			65.00	3.85	100.0	26.0	90.0	23.4	80.0	20.8
DJ-27X70B			70.00	3.57	100.0	28.0	90.0	25.2	80.0	22.4
DJ-27X75B			75.00	3.33	100.0	30.0	90.0	27.0	80.0	24.0
DJ-27X80B			80.00	3.13	100.0	32.0	90.0	28.8	80.0	25.6
DJ-27X90B			90.00	2.78	100.0	36.0	90.0	32.4	80.0	28.8
DJ-27X100B			100.00	2.50	100.0	40.0	90.0	36.0	80.0	32.0
DJ-27X125B			125.00	2.00	100.0	50.0	90.0	45.0	80.0	40.0
DJ-27X150B			150.00	1.67	100.0	60.0	90.0	54.0	80.0	48.0
DJ-27X175B			175.00	1.43	100.0	70.0	90.0	63.0	80.0	56.0
DJ-30X25B	30.02	15.00	25.00	12.11	121.0	10.0	109.0	9.0	97.0	8.0
DJ-30X30B			30.00	10.08	121.0	12.0	109.0	10.8	97.0	9.6
DJ-30X35B			35.00	8.65	121.0	14.0	109.0	12.6	97.0	11.2
DJ-30X40B			40.00	7.56	121.0	16.0	109.0	14.4	97.0	12.8
DJ-30X45B			45.00	6.73	121.0	18.0	109.0	16.2	97.0	14.4
DJ-30X50B			50.00	6.05	121.0	20.0	109.0	18.0	97.0	16.0
DJ-30X55B			55.00	5.50	121.0	22.0	109.0	19.8	97.0	17.6
DJ-30X60B			60.00	5.04	121.0	24.0	109.0	21.6	97.0	19.2
DJ-30X65B			65.00	4.65	121.0	26.0	109.0	23.4	97.0	20.8

* Loads near solid lengths for reference only; overstressed condition.

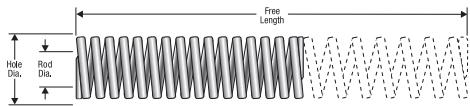


Century Spring

JIS Die Springs LIGHT DUTY (BLUE)


Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Rate kgf/mm	Max. Oper. Def. 40% Free Length Load kgf	Max. Oper. Def. 40% Free length Deflection mm	Long Life 36% Free Length Load kgf	Long Life 36% Free Length Deflection mm	Optimal Life 32% Free Length Load kgf	Optimal Life 32% Free Length Deflection mm
DJ-30X70B	30.02	15.00	70.00	4.32	121.0	28.0	109.0	25.2	97.0	22.4
DJ-30X75B			75.00	4.03	121.0	30.0	109.0	27.0	97.0	24.0
DJ-30X80B			80.00	3.78	121.0	32.0	109.0	28.8	97.0	25.6
DJ-30X90B			90.00	3.36	121.0	36.0	109.0	32.4	97.0	28.8
DJ-30X100B			100.00	3.02	121.0	40.0	109.0	36.0	97.0	32.0
DJ-30X125B			125.00	2.42	121.0	50.0	109.0	45.0	97.0	40.0
DJ-30X150B			150.00	2.01	121.0	60.0	109.0	54.0	97.0	48.0
DJ-30X175B			175.00	1.72	121.0	70.0	109.0	63.0	97.0	56.0
DJ-30X200B			200.00	1.51	121.0	80.0	109.0	72.0	97.0	64.0
DJ-35X40B	35.00	17.50	40.00	10.31	165.0	16.0	149.0	14.4	132.0	12.8
DJ-35X45B			45.00	9.17	165.0	18.0	149.0	16.2	132.0	14.4
DJ-35X50B			50.00	8.25	165.0	20.0	149.0	18.0	132.0	16.0
DJ-35X55B			55.00	7.50	165.0	22.0	149.0	19.8	132.0	17.6
DJ-35X60B			60.00	6.87	165.0	24.0	149.0	21.6	132.0	19.2
DJ-35X65B			65.00	6.35	165.0	26.0	149.0	23.4	132.0	20.8
DJ-35X70B			70.00	5.89	165.0	28.0	149.0	25.2	132.0	22.4
DJ-35X75B			75.00	5.50	165.0	30.0	149.0	27.0	132.0	24.0
DJ-35X80B			80.00	5.15	165.0	32.0	149.0	28.8	132.0	25.6
DJ-35X90B	40.01	20.00	90.00	4.58	165.0	36.0	149.0	32.4	132.0	28.8
DJ-35X100B			100.00	4.12	165.0	40.0	149.0	36.0	132.0	32.0
DJ-35X125B			125.00	3.30	165.0	50.0	149.0	45.0	132.0	40.0
DJ-35X150B			150.00	2.75	165.0	60.0	149.0	54.0	132.0	48.0
DJ-35X175B			175.00	2.35	165.0	70.0	149.0	63.0	132.0	56.0
DJ-35X200B			200.00	2.06	165.0	80.0	149.0	72.0	132.0	64.0
DJ-40X40B	50.01	25.00	40.00	13.50	216.0	16.0	194.0	14.4	173.0	12.8
DJ-40X50B			50.00	10.80	216.0	20.0	194.0	18.0	173.0	16.0
DJ-40X60B			60.00	9.00	216.0	24.0	194.0	21.6	173.0	19.2
DJ-40X70B			70.00	7.71	216.0	28.0	194.0	25.2	173.0	22.4
DJ-40X80B			80.00	6.75	216.0	32.0	194.0	28.8	173.0	25.6
DJ-40X90B			90.00	6.00	216.0	36.0	194.0	32.4	173.0	28.8
DJ-40X100B			100.00	5.40	216.0	40.0	194.0	36.0	173.0	32.0
DJ-40X125B			125.00	4.32	216.0	50.0	194.0	45.0	173.0	40.0
DJ-40X150B			150.00	3.60	216.0	60.0	194.0	54.0	173.0	48.0
DJ-40X175B			175.00	3.08	216.0	70.0	194.0	63.0	173.0	56.0
DJ-40X200B			200.00	2.70	216.0	80.0	194.0	72.0	173.0	64.0
DJ-40X250B			250.00	2.16	216.0	100.0	194.0	90.0	173.0	80.0
DJ-50X50B	60.02	30.00	50.00	16.89	338.0	20.0	304.0	18.0	270.0	16.0
DJ-50X60B			60.00	14.08	338.0	24.0	304.0	21.6	270.0	19.2
DJ-50X70B			70.00	12.07	338.0	28.0	304.0	25.2	270.0	22.4
DJ-50X80B			80.00	10.56	338.0	32.0	304.0	28.8	270.0	25.6
DJ-50X90B			90.00	9.38	338.0	36.0	304.0	32.4	270.0	28.8
DJ-50X100B			100.00	8.45	338.0	40.0	304.0	36.0	270.0	32.0
DJ-50X125B			125.00	6.76	338.0	50.0	304.0	45.0	270.0	40.0
DJ-50X150B			150.00	5.63	338.0	60.0	304.0	54.0	270.0	48.0
DJ-50X175B			175.00	4.82	338.0	70.0	304.0	63.0	270.0	56.0
DJ-50X200B			200.00	4.22	338.0	80.0	304.0	72.0	270.0	64.0
DJ-50X250B			250.00	3.38	338.0	100.0	304.0	90.0	270.0	80.0
DJ-50X300B			300.00	2.81	338.0	120.0	304.0	108.0	270.0	96.0
DJ-50X350B			350.00	2.41	338.0	140.0	304.0	126.0	270.0	112.0
DJ-50X400B			400.00	2.11	338.0	160.0	304.0	144.0	270.0	128.0
DJ-50X450B			450.00	1.88	338.0	180.0	304.0	162.0	270.0	144.0
DJ-50X500B			500.00	1.69	338.0	200.0	304.0	180.0	270.0	160.0
DJ-60X60B	50.01	25.00	60.00	20.25	486.0	24.0	437.0	21.6	389.0	19.2
DJ-60X70B			70.00	17.35	486.0	28.0	437.0	25.2	389.0	22.4
DJ-60X80B			80.00	15.18	486.0	32.0	437.0	28.8	389.0	25.6
DJ-60X90B			90.00	13.50	486.0	36.0	437.0	32.4	389.0	28.8
DJ-60X100B			100.00	12.15	486.0	40.0	437.0	36.0	389.0	32.0
DJ-60X125B			125.00	9.72	486.0	50.0	437.0	45.0	389.0	40.0
DJ-60X150B			150.00	8.10	486.0	60.0	437.0	54.0	389.0	48.0
DJ-60X175B			175.00	6.94	486.0	70.0	437.0	63.0	389.0	56.0
DJ-60X200B			200.00	6.07	486.0	80.0	437.0	72.0	389.0	64.0
DJ-60X250B			250.00	4.86	486.0	100.0	437.0	90.0	389.0	80.0
DJ-60X300B	60.02	30.00	300.00	4.05	486.0	120.0	437.0	108.0	389.0	96.0
DJ-60X350B			350.00	3.47	486.0	140.0	437.0	126.0	389.0	112.0
DJ-60X400B			400.00	3.04	486.0	160.0	437.0	144.0	389.0	128.0
DJ-60X450B			450.00	2.70	486.0	180.0	437.0	162.0	389.0	144.0
DJ-60X500B			500.00	2.43	486.0	200.0	437.0	180.0	389.0	160.0

* Loads near solid lengths for reference only; overstressed condition.

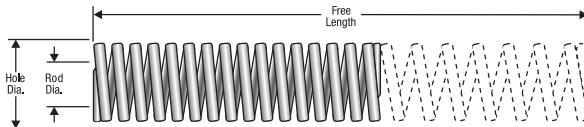

JIS Die Springs MEDIUM DUTY (RED)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Rate kgf/mm	Max. Oper. Def.	Max. Oper. Def.	Long Life 29% Free Length Load kgf	Long Life 29% Free Length Deflection mm	Optimal Life 26% Free Length Load kgf	Optimal Life 26% Free Length Deflection mm
					32% Free Length Load kgf	32% Free Length Deflection mm				
DJ-8X10R	8.00	4.00	10.00	4.34	14.0	3.2	12.5	2.9	11.0	2.6
DJ-8X15R			15.00	2.89	14.0	4.8	12.5	4.4	11.0	3.9
DJ-8X20R			20.00	2.17	14.0	6.4	12.5	5.8	11.0	5.2
DJ-8X25R			25.00	1.74	14.0	8.0	12.5	7.3	11.0	6.5
DJ-8X30R			30.00	1.45	14.0	9.6	12.5	8.7	11.0	7.8
DJ-8X35R			35.00	1.24	14.0	11.2	12.5	10.2	11.0	9.1
DJ-8X40R			40.00	1.09	14.0	12.8	12.5	11.6	11.0	10.4
DJ-8X45R			45.00	0.97	14.0	14.4	12.5	13.1	11.0	11.7
DJ-8X50R			50.00	0.87	14.0	16.0	12.5	14.5	11.0	13.0
DJ-8X55R			55.00	0.79	14.0	17.6	12.5	16.0	11.0	14.3
DJ-8X60R			60.00	0.72	14.0	19.2	12.5	17.4	11.0	15.6
DJ-10X20R	10.01	5.00	20.00	3.13	20.0	6.4	18.0	5.8	16.0	5.2
DJ-10X25R			25.00	2.50	20.0	8.0	18.0	7.3	16.0	6.5
DJ-10X30R			30.00	2.08	20.0	9.6	18.0	8.7	16.0	7.8
DJ-10X35R			35.00	1.78	20.0	11.2	18.0	10.2	16.0	9.1
DJ-10X40R			40.00	1.56	20.0	12.8	18.0	11.6	16.0	10.4
DJ-10X45R			45.00	1.38	20.0	14.4	18.0	13.1	16.0	11.7
DJ-10X50R			50.00	1.25	20.0	16.0	18.0	14.5	16.0	13.0
DJ-10X55R			55.00	1.13	20.0	17.6	18.0	16.0	16.0	14.3
DJ-10X60R			60.00	1.04	20.0	19.2	18.0	17.4	16.0	15.6
DJ-10X65R			65.00	0.96	20.0	20.8	18.0	18.9	16.0	16.9
DJ-10X70R			70.00	0.89	20.0	22.4	18.0	20.3	16.0	18.2
DJ-10X75R			75.00	0.83	20.0	24.0	18.0	21.8	16.0	19.5
DJ-10X80R			80.00	0.78	20.0	25.6	18.0	23.2	16.0	20.8
DJ-12X20R	12.01	6.00	20.00	4.53	29.0	6.4	26.0	5.8	23.0	5.2
DJ-12X25R			25.00	3.62	29.0	8.0	26.0	7.3	23.0	6.5
DJ-12X30R			30.00	3.02	29.0	9.6	26.0	8.7	23.0	7.8
DJ-12X35R			35.00	2.58	29.0	11.2	26.0	10.2	23.0	9.1
DJ-12X40R			40.00	2.27	29.0	12.8	26.0	11.6	23.0	10.4
DJ-12X45R			45.00	2.01	29.0	14.4	26.0	13.1	23.0	11.7
DJ-12X50R			50.00	1.81	29.0	16.0	26.0	14.5	23.0	13.0
DJ-12X55R			55.00	1.64	29.0	17.6	26.0	16.0	23.0	14.3
DJ-12X60R			60.00	1.51	29.0	19.2	26.0	17.4	23.0	15.6
DJ-12X65R			65.00	1.39	29.0	20.8	26.0	18.9	23.0	16.9
DJ-12X70R			70.00	1.29	29.0	22.4	26.0	20.3	23.0	18.2
DJ-12X75R			75.00	1.20	29.0	24.0	26.0	21.8	23.0	19.5
DJ-12X80R			80.00	1.13	29.0	25.6	26.0	23.2	23.0	20.8
DJ-14X25R	14.02	7.00	25.00	4.87	39.0	8.0	35.0	7.3	31.0	6.5
DJ-14X30R			30.00	4.06	39.0	9.6	35.0	8.7	31.0	7.8
DJ-14X35R			35.00	3.48	39.0	11.2	35.0	10.2	31.0	9.1
DJ-14X40R			40.00	3.04	39.0	12.8	35.0	11.6	31.0	10.4
DJ-14X45R			45.00	2.70	39.0	14.4	35.0	13.1	31.0	11.7
DJ-14X50R			50.00	2.43	39.0	16.0	35.0	14.5	31.0	13.0
DJ-14X55R			55.00	2.21	39.0	17.6	35.0	16.0	31.0	14.3
DJ-14X60R			60.00	2.03	39.0	19.2	35.0	17.4	31.0	15.6
DJ-14X65R			65.00	1.87	39.0	20.8	35.0	18.9	31.0	16.9
DJ-14X70R			70.00	1.74	39.0	22.4	35.0	20.3	31.0	18.2
DJ-14X75R			75.00	1.62	39.0	24.0	35.0	21.8	31.0	19.5
DJ-14X80R			80.00	1.52	39.0	25.6	35.0	23.2	31.0	20.8
DJ-14X90R			90.00	1.35	39.0	28.8	35.0	26.1	31.0	23.4
DJ-16X25R	16.00	8.00	25.00	6.39	51.0	8.0	46.0	7.3	41.0	6.5
DJ-16X30R			30.00	5.32	51.0	9.6	46.0	8.7	41.0	7.8
DJ-16X35R			35.00	4.65	51.0	11.2	46.0	10.2	41.0	9.1
DJ-16X40R			40.00	3.98	51.0	12.8	46.0	11.6	41.0	10.4
DJ-16X45R			45.00	3.54	51.0	14.4	46.0	13.1	41.0	11.7
DJ-16X50R			50.00	3.18	51.0	16.0	46.0	14.5	41.0	13.0
DJ-16X55R			55.00	2.89	51.0	17.6	46.0	16.0	41.0	14.3
DJ-16X60R			60.00	2.65	51.0	19.2	46.0	17.4	41.0	15.6
DJ-16X65R			65.00	2.45	51.0	20.8	46.0	18.9	41.0	16.9
DJ-16X70R			70.00	2.27	51.0	22.4	46.0	20.3	41.0	18.2
DJ-16X75R			75.00	2.11	51.0	24.0	46.0	21.8	41.0	19.5
DJ-16X80R			80.00	1.99	51.0	25.6	46.0	23.2	41.0	20.8
DJ-16X90R			90.00	1.77	51.0	28.8	46.0	26.1	41.0	23.4
DJ-16X100R			100.00	1.59	51.0	32.0	46.0	29.0	41.0	26.0
DJ-18X25R	18.01	9.00	25.00	8.12	65.0	8.0	58.0	7.3	52.0	6.5
DJ-18X30R			30.00	6.77	65.0	9.6	58.0	8.7	52.0	7.8
DJ-18X35R			35.00	5.80	65.0	11.2	58.0	10.2	52.0	9.1
DJ-18X40R			40.00	5.07	65.0	12.8	58.0	11.6	52.0	10.4
DJ-18X45R			45.00	4.51	65.0	14.4	58.0	13.1	52.0	11.7
DJ-18X50R			50.00	4.06	65.0	16.0	58.0	14.5	52.0	13.0
DJ-18X55R			55.00	3.69	65.0	17.6	58.0	16.0	52.0	14.3
DJ-18X60R			60.00	3.38	65.0	19.2	58.0	17.4	52.0	15.6
DJ-18X65R			65.00	3.12	65.0	20.8	58.0	18.9	52.0	16.9
DJ-18X70R			70.00	2.90	65.0	22.4	58.0	20.3	52.0	18.2
DJ-18X75R			75.00	2.70	65.0	24.0	58.0	21.8	52.0	19.5
DJ-18X80R			80.00	2.53	65.0	25.6	58.0	23.2	52.0	20.8
DJ-18X90R			90.00	2.25	65.0	28.8	58.0	26.1	52.0	23.4
DJ-18X100R			100.00	2.02	65.0	32.0	58.0	29.0	52.0	26.0

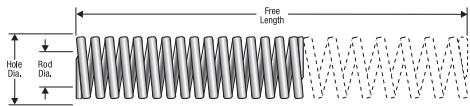


Century Spring

JIS Die Springs MEDIUM DUTY (RED)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Rate kgf/mm	Max. Oper. Def. 32% Free Length Load kgf	Max. Oper. Def. 32% Free Length Deflection mm	Long Life 29% Free Length Load kgf	Long Life 29% Free Length Deflection mm	Optimal Life 26% Free Length Load kgf	Optimal Life 26% Free Length Deflection mm
DJ-20X25R			25.00	10.00	80.0	8.0	72.0	7.3	64.0	6.5
DJ-20X30R			30.00	8.33	80.0	9.6	72.0	8.7	64.0	7.8
DJ-20X35R			35.00	7.14	80.0	11.2	72.0	10.2	64.0	9.1
DJ-20X40R			40.00	6.25	80.0	12.8	72.0	11.6	64.0	10.4
DJ-20X45R			45.00	5.55	80.0	14.4	72.0	13.1	64.0	11.7
DJ-20X50R			50.00	5.00	80.0	16.0	72.0	14.5	64.0	13.0
DJ-20X55R			55.00	4.54	80.0	17.6	72.0	16.0	64.0	14.3
DJ-20X60R	20.02	10.00	60.00	4.16	80.0	19.2	72.0	17.4	64.0	15.6
DJ-20X65R			65.00	3.84	80.0	20.8	72.0	18.9	64.0	16.9
DJ-20X70R			70.00	3.57	80.0	22.4	72.0	20.3	64.0	18.2
DJ-20X75R			75.00	3.33	80.0	24.0	72.0	21.8	64.0	19.5
DJ-20X80R			80.00	3.12	80.0	25.6	72.0	23.2	64.0	20.8
DJ-20X90R			90.00	2.77	80.0	28.8	72.0	26.1	64.0	23.4
DJ-20X100R			100.00	2.50	80.0	32.0	72.0	29.0	64.0	26.0
DJ-20X125R			125.00	2.00	80.0	40.0	72.0	36.3	64.0	32.5
DJ-20X150R			150.00	1.67	80.0	48.0	72.0	43.5	64.0	39.0
DJ-22X25R			25.00	12.13	97.0	8.0	87.0	7.3	78.0	6.5
DJ-22X30R			30.00	10.10	97.0	9.6	87.0	8.7	78.0	7.8
DJ-22X35R			35.00	8.65	97.0	11.2	87.0	10.2	78.0	9.1
DJ-22X40R			40.00	7.57	97.0	12.8	87.0	11.6	78.0	10.4
DJ-22X45R			45.00	6.74	97.0	14.4	87.0	13.1	78.0	11.7
DJ-22X50R			50.00	6.06	97.0	16.0	87.0	14.5	78.0	13.0
DJ-22X55R			55.00	5.50	97.0	17.6	87.0	16.0	78.0	14.3
DJ-22X60R			60.00	5.05	97.0	19.2	87.0	17.4	78.0	15.6
DJ-22X65R	22.02	11.00	65.00	4.66	97.0	20.8	87.0	18.9	78.0	16.9
DJ-22X70R			70.00	4.33	97.0	22.4	87.0	20.3	78.0	18.2
DJ-22X75R			75.00	4.04	97.0	24.0	87.0	21.8	78.0	19.5
DJ-22X80R			80.00	3.78	97.0	25.6	87.0	23.2	78.0	20.8
DJ-22X90R			90.00	3.36	97.0	28.8	87.0	26.1	78.0	23.4
DJ-22X100R			100.00	3.03	97.0	32.0	87.0	29.0	78.0	26.0
DJ-22X125R			125.00	2.42	97.0	40.0	87.0	36.3	78.0	32.5
DJ-22X150R			150.00	2.01	97.0	48.0	87.0	43.5	78.0	39.0
DJ-25X25R			25.00	15.63	125.0	8.0	112.0	7.3	100.0	6.5
DJ-25X30R			30.00	13.02	125.0	9.6	112.0	8.7	100.0	7.8
DJ-25X35R			35.00	11.20	125.0	11.2	112.0	10.2	100.0	9.1
DJ-25X40R			40.00	9.76	125.0	12.8	112.0	11.6	100.0	10.4
DJ-25X45R			45.00	8.68	125.0	14.4	112.0	13.1	100.0	11.7
DJ-25X50R			50.00	7.81	125.0	16.0	112.0	14.5	100.0	13.0
DJ-25X55R			55.00	7.10	125.0	17.6	112.0	16.0	100.0	14.3
DJ-25X60R			60.00	6.51	125.0	19.2	112.0	17.4	100.0	15.6
DJ-25X65R	25.02	12.50	65.00	6.00	125.0	20.8	112.0	18.9	100.0	16.9
DJ-25X70R			70.00	5.58	125.0	22.4	112.0	20.3	100.0	18.2
DJ-25X75R			75.00	5.21	125.0	24.0	112.0	21.8	100.0	19.5
DJ-25X80R			80.00	4.88	125.0	25.6	112.0	23.2	100.0	20.8
DJ-25X90R			90.00	4.34	125.0	28.8	112.0	26.1	100.0	23.4
DJ-25X100R			100.00	3.90	125.0	32.0	112.0	29.0	100.0	26.0
DJ-25X125R			125.00	3.12	125.0	40.0	112.0	36.3	100.0	32.5
DJ-25X150R			150.00	2.60	125.0	48.0	112.0	43.5	100.0	39.0
DJ-25X175R			175.00	2.23	125.0	56.0	112.0	50.8	100.0	45.5
DJ-27X25R			25.00	18.25	146.0	8.0	131.0	7.3	117.0	6.5
DJ-27X30R			30.00	15.20	146.0	9.6	131.0	8.7	117.0	7.8
DJ-27X35R			35.00	13.04	146.0	11.2	131.0	10.2	117.0	9.1
DJ-27X40R			40.00	11.40	146.0	12.8	131.0	11.6	117.0	10.4
DJ-27X45R			45.00	10.14	146.0	14.4	131.0	13.1	117.0	11.7
DJ-27X50R			50.00	9.12	146.0	16.0	131.0	14.5	117.0	13.0
DJ-27X55R			55.00	8.30	146.0	17.6	131.0	16.0	117.0	14.3
DJ-27X60R	27.00	13.50	60.00	7.60	146.0	19.2	131.0	17.4	117.0	15.6
DJ-27X65R			65.00	7.00	146.0	20.8	131.0	18.9	117.0	16.9
DJ-27X70R			70.00	6.51	146.0	22.4	131.0	20.3	117.0	18.2
DJ-27X75R			75.00	6.08	146.0	24.0	131.0	21.8	117.0	19.5
DJ-27X80R			80.00	5.70	146.0	25.6	131.0	23.2	117.0	20.8
DJ-27X90R			90.00	5.06	146.0	28.8	131.0	26.1	117.0	23.4
DJ-27X100R			100.00	4.56	146.0	32.0	131.0	29.0	117.0	26.0
DJ-27X125R			125.00	3.65	146.0	40.0	131.0	36.3	117.0	32.5
DJ-27X150R			150.00	3.04	146.0	48.0	131.0	43.5	117.0	39.0
DJ-27X175R			175.00	2.61	146.0	56.0	131.0	50.8	117.0	45.5


* Loads near solid lengths for reference only; overstressed condition.

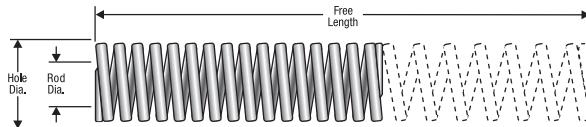

JIS Die Springs MEDIUM DUTY (RED)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Rate kgf/mm	Max. Oper. Def.	Max. Oper. Def.	Long Life 29% Free Length Load kgf	Long Life 29% Free Length Deflection mm	Optimal Life 26% Free Length Load kgf	Optimal Life 26% Free Length Deflection mm
					32% Free Length Load kgf	32% Free Length Deflection mm				
DJ-30X25R	30.02	15.00	25.00	22.50	180.0	8.0	161.0	7.3	144.0	6.5
DJ-30X30R			30.00	18.75	180.0	9.6	161.0	8.7	144.0	7.8
DJ-30X35R			35.00	16.10	180.0	11.2	161.0	10.2	144.0	9.1
DJ-30X40R			40.00	14.06	180.0	12.8	161.0	11.6	144.0	10.4
DJ-30X45R			45.00	12.50	180.0	14.4	161.0	13.1	144.0	11.7
DJ-30X50R			50.00	11.25	180.0	16.0	161.0	14.5	144.0	13.0
DJ-30X55R			55.00	10.23	180.0	17.6	161.0	16.0	144.0	14.3
DJ-30X60R			60.00	9.37	180.0	19.2	161.0	17.4	144.0	15.6
DJ-30X65R			65.00	8.65	180.0	20.8	161.0	18.9	144.0	16.9
DJ-30X70R			70.00	8.03	180.0	22.4	161.0	20.3	144.0	18.2
DJ-30X75R			75.00	7.50	180.0	24.0	161.0	21.8	144.0	19.5
DJ-30X80R			80.00	7.03	180.0	25.6	161.0	23.2	144.0	20.8
DJ-30X90R			90.00	6.25	180.0	28.8	161.0	26.1	144.0	23.4
DJ-30X100R			100.00	5.63	180.0	32.0	161.0	29.0	144.0	26.0
DJ-30X125R			125.00	4.50	180.0	40.0	161.0	36.3	144.0	32.5
DJ-30X150R			150.00	3.75	180.0	48.0	161.0	43.5	144.0	39.0
DJ-30X175R			175.00	3.21	180.0	56.0	161.0	50.8	144.0	45.5
DJ-30X200R			200.00	2.81	180.0	64.0	161.0	58.0	144.0	52.0
DJ-35X40R	35.00	17.50	40.00	19.14	245.0	12.8	220.0	11.6	195.0	10.4
DJ-35X45R			45.00	17.01	245.0	14.4	220.0	13.1	195.0	11.7
DJ-35X50R			50.00	15.31	245.0	16.0	220.0	14.5	195.0	13.0
DJ-35X55R			55.00	13.92	245.0	17.6	220.0	16.0	195.0	14.3
DJ-35X60R			60.00	12.76	245.0	19.2	220.0	17.4	195.0	15.6
DJ-35X65R			65.00	11.77	245.0	20.8	220.0	18.9	195.0	16.9
DJ-35X70R			70.00	10.93	245.0	22.4	220.0	20.3	195.0	18.2
DJ-35X75R			75.00	10.20	245.0	24.0	220.0	21.8	195.0	19.5
DJ-35X80R			80.00	9.57	245.0	25.6	220.0	23.2	195.0	20.8
DJ-35X90R			90.00	8.50	245.0	28.8	220.0	26.1	195.0	23.4
DJ-35X100R			100.00	7.65	245.0	32.0	220.0	29.0	195.0	26.0
DJ-35X125R			125.00	6.12	245.0	40.0	220.0	36.3	195.0	32.5
DJ-35X150R			150.00	5.10	245.0	48.0	220.0	43.5	195.0	39.0
DJ-35X175R			175.00	4.37	245.0	56.0	220.0	50.8	195.0	45.5
DJ-35X200R			200.00	3.82	245.0	64.0	220.0	58.0	195.0	52.0
DJ-40X40R	40.01	20.00	40.00	25.02	320.0	12.8	288.0	11.6	256.0	10.4
DJ-40X50R			50.00	20.00	320.0	16.0	288.0	14.5	256.0	13.0
DJ-40X60R			60.00	16.60	320.0	19.2	288.0	17.4	256.0	15.6
DJ-40X70R			70.00	14.28	320.0	22.4	288.0	20.3	256.0	18.2
DJ-40X80R			80.00	12.50	320.0	25.6	288.0	23.2	256.0	20.8
DJ-40X90R			90.00	11.11	320.0	28.8	288.0	26.1	256.0	23.4
DJ-40X100R			100.00	10.00	320.0	32.0	288.0	29.0	256.0	26.0
DJ-40X125R			125.00	8.00	320.0	40.0	288.0	36.3	256.0	32.5
DJ-40X150R			150.00	6.66	320.0	48.0	288.0	43.5	256.0	39.0
DJ-40X175R			175.00	5.71	320.0	56.0	288.0	50.8	256.0	45.5
DJ-40X200R			200.00	5.00	320.0	64.0	288.0	58.0	256.0	52.0
DJ-40X250R			250.00	4.00	320.0	80.0	288.0	72.5	256.0	65.0
DJ-50X50R	50.01	25.00	50.00	31.25	500.0	16.0	450.0	14.5	400.0	13.0
DJ-50X60R			60.00	26.04	500.0	19.2	450.0	17.4	400.0	15.6
DJ-50X70R			70.00	22.32	500.0	22.4	450.0	20.3	400.0	18.2
DJ-50X80R			80.00	19.53	500.0	25.6	450.0	23.2	400.0	20.8
DJ-50X90R			90.00	17.36	500.0	28.8	450.0	26.1	400.0	23.4
DJ-50X100R			100.00	15.62	500.0	32.0	450.0	29.0	400.0	26.0
DJ-50X125R			125.00	12.50	500.0	40.0	450.0	36.3	400.0	32.5
DJ-50X150R			150.00	10.41	500.0	48.0	450.0	43.5	400.0	39.0
DJ-50X175R			175.00	8.92	500.0	56.0	450.0	50.8	400.0	45.5
DJ-50X200R			200.00	7.81	500.0	64.0	450.0	58.0	400.0	52.0
DJ-50X250R			250.00	6.25	500.0	80.0	450.0	72.5	400.0	65.0
DJ-50X300R			300.00	5.20	500.0	96.0	450.0	87.0	400.0	78.0
DJ-60X60R	60.02	30.00	60.00	37.40	720.0	19.2	648.0	17.4	575.0	15.6
DJ-60X70R			70.00	32.10	720.0	22.4	648.0	20.3	575.0	18.2
DJ-60X80R			80.00	28.12	720.0	25.6	648.0	23.2	575.0	20.8
DJ-60X90R			90.00	25.00	720.0	28.8	648.0	26.1	575.0	23.4
DJ-60X100R			100.00	22.50	720.0	32.0	648.0	29.0	575.0	26.0
DJ-60X125R			125.00	18.00	720.0	40.0	648.0	36.3	575.0	32.5
DJ-60X150R			150.00	15.00	720.0	48.0	648.0	43.5	575.0	39.0
DJ-60X175R			175.00	12.85	720.0	56.0	648.0	50.8	575.0	45.5
DJ-60X200R			200.00	11.25	720.0	64.0	648.0	58.0	575.0	52.0
DJ-60X250R			250.00	9.00	720.0	80.0	648.0	72.5	575.0	65.0
DJ-60X300R			300.00	7.50	720.0	96.0	648.0	87.0	575.0	78.0

* Loads near solid lengths for reference only; overstressed condition.

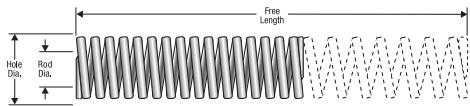


Century Spring

JIS Die Springs HEAVY DUTY (GREEN)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Rate kgf/mm	Max. Oper. Def. 24% Free Length Load kgf	Max. Oper. Def. 24% Free length Deflection mm	Long Life 22% Free Length Load kgf	Long Life 22% Free Length Deflection mm	Optimal Life 19% Free Length Load kgf	Optimal Life 19% Free Length Deflection mm
DJ-8X10G	8.00	4.00	10.00	8.80	21.0	2.4	19.0	2.2	17.0	1.9
DJ-8X15G			15.00	5.86	21.0	3.6	19.0	3.3	17.0	2.9
DJ-8X20G			20.00	4.40	21.0	4.8	19.0	4.4	17.0	3.8
DJ-8X25G			25.00	3.52	21.0	6.0	19.0	5.5	17.0	4.8
DJ-8X30G			30.00	2.93	21.0	7.2	19.0	6.6	17.0	5.7
DJ-8X35G			35.00	2.51	21.0	8.4	19.0	7.7	17.0	6.7
DJ-8X40G			40.00	2.20	21.0	9.6	19.0	8.8	17.0	7.6
DJ-8X45G			45.00	1.95	21.0	10.8	19.0	9.9	17.0	8.6
DJ-8X50G			50.00	1.76	21.0	12.0	19.0	11.0	17.0	9.5
DJ-8X55G			55.00	1.60	21.0	13.2	19.0	12.1	17.0	10.5
DJ-8X60G			60.00	1.47	21.0	14.4	19.0	13.2	17.0	11.4
DJ-10X20G	10.01	5.00	20.00	6.25	30.0	4.8	27.0	4.4	24.0	3.8
DJ-10X25G			25.00	5.00	30.0	6.0	27.0	5.5	24.0	4.8
DJ-10X30G			30.00	4.16	30.0	7.2	27.0	6.6	24.0	5.7
DJ-10X35G			35.00	3.57	30.0	8.4	27.0	7.7	24.0	6.7
DJ-10X40G			40.00	3.15	30.0	9.6	27.0	8.8	24.0	7.6
DJ-10X45G			45.00	2.77	30.0	10.8	27.0	9.9	24.0	8.6
DJ-10X50G			50.00	2.50	30.0	12.0	27.0	11.0	24.0	9.5
DJ-10X55G			55.00	2.27	30.0	13.2	27.0	12.1	24.0	10.5
DJ-10X60G			60.00	2.08	30.0	14.4	27.0	13.2	24.0	11.4
DJ-10X65G			65.00	1.92	30.0	15.6	27.0	14.3	24.0	12.4
DJ-10X70G			70.00	1.79	30.0	16.8	27.0	15.4	24.0	13.3
DJ-10X75G			75.00	1.67	30.0	18.0	27.0	16.5	24.0	14.3
DJ-10X80G			80.00	1.56	30.0	19.2	27.0	17.6	24.0	15.2
DJ-12X20G	12.01	6.00	20.00	8.90	43.0	4.8	38.0	4.4	34.0	3.8
DJ-12X25G			25.00	7.10	43.0	6.0	38.0	5.5	34.0	4.8
DJ-12X30G			30.00	5.97	43.0	7.2	38.0	6.6	34.0	5.7
DJ-12X35G			35.00	5.11	43.0	8.4	38.0	7.7	34.0	6.7
DJ-12X40G			40.00	4.47	43.0	9.6	38.0	8.8	34.0	7.6
DJ-12X45G			45.00	3.98	43.0	10.8	38.0	9.9	34.0	8.6
DJ-12X50G			50.00	3.58	43.0	12.0	38.0	11.0	34.0	9.5
DJ-12X55G			55.00	3.25	43.0	13.2	38.0	12.1	34.0	10.5
DJ-12X60G			60.00	2.98	43.0	14.4	38.0	13.2	34.0	11.4
DJ-12X65G			65.00	2.74	43.0	15.6	38.0	14.3	34.0	12.4
DJ-12X70G			70.00	2.54	43.0	16.8	38.0	15.4	34.0	13.3
DJ-12X75G			75.00	2.37	43.0	18.0	38.0	16.5	34.0	14.3
DJ-12X80G			80.00	2.21	43.0	19.2	38.0	17.6	34.0	15.2
DJ-14X25G	14.02	7.00	25.00	9.83	59.0	6.0	53.0	5.5	47.0	4.8
DJ-14X30G			30.00	8.19	59.0	7.2	53.0	6.6	47.0	5.7
DJ-14X35G			35.00	7.02	59.0	8.4	53.0	7.7	47.0	6.7
DJ-14X40G			40.00	6.14	59.0	9.6	53.0	8.8	47.0	7.6
DJ-14X45G			45.00	5.46	59.0	10.8	53.0	9.9	47.0	8.6
DJ-14X50G			50.00	4.91	59.0	12.0	53.0	11.0	47.0	9.5
DJ-14X55G			55.00	4.46	59.0	13.2	53.0	12.1	47.0	10.5
DJ-14X60G			60.00	4.09	59.0	14.4	53.0	13.2	47.0	11.4
DJ-14X65G			65.00	3.78	59.0	15.6	53.0	14.3	47.0	12.4
DJ-14X70G			70.00	3.51	59.0	16.8	53.0	15.4	47.0	13.3
DJ-14X75G			75.00	3.27	59.0	18.0	53.0	16.5	47.0	14.3
DJ-14X80G			80.00	3.07	59.0	19.2	53.0	17.6	47.0	15.2
DJ-14X90G			90.00	2.72	59.0	21.6	53.0	19.8	47.0	17.1
DJ-16X25G	16.00	8.00	25.00	12.83	77.0	6.0	69.0	5.5	62.0	4.8
DJ-16X30G			30.00	10.69	77.0	7.2	69.0	6.6	62.0	5.7
DJ-16X35G			35.00	9.16	77.0	8.4	69.0	7.7	62.0	6.7
DJ-16X40G			40.00	8.02	77.0	9.6	69.0	8.8	62.0	7.6
DJ-16X45G			45.00	7.12	77.0	10.8	69.0	9.9	62.0	8.6
DJ-16X50G			50.00	6.41	77.0	12.0	69.0	11.0	62.0	9.5
DJ-16X55G			55.00	5.83	77.0	13.2	69.0	12.1	62.0	10.5
DJ-16X60G			60.00	5.34	77.0	14.4	69.0	13.2	62.0	11.4
DJ-16X65G			65.00	4.93	77.0	15.6	69.0	14.3	62.0	12.4
DJ-16X70G			70.00	4.58	77.0	16.8	69.0	15.4	62.0	13.3
DJ-16X75G			75.00	4.28	77.0	18.0	69.0	16.5	62.0	14.3
DJ-16X80G			80.00	4.01	77.0	19.2	69.0	17.6	62.0	15.2
DJ-16X90G			90.00	3.57	77.0	21.6	69.0	19.8	62.0	17.1
DJ-16X100G			100.00	3.21	77.0	24.0	69.0	22.0	62.0	19.0
DJ-18X25G	18.01	9.00	25.00	16.16	97.0	6.0	87.0	5.5	78.0	4.8
DJ-18X30G			30.00	13.57	97.0	7.2	87.0	6.6	78.0	5.7
DJ-18X35G			35.00	11.54	97.0	8.4	87.0	7.7	78.0	6.7
DJ-18X40G			40.00	10.10	97.0	9.6	87.0	8.8	78.0	7.6
DJ-18X45G			45.00	8.98	97.0	10.8	87.0	9.9	78.0	8.6
DJ-18X50G			50.00	8.08	97.0	12.0	87.0	11.0	78.0	9.5
DJ-18X55G			55.00	7.34	97.0	13.2	87.0	12.1	78.0	10.5
DJ-18X60G			60.00	6.73	97.0	14.4	87.0	13.2	78.0	11.4
DJ-18X65G			65.00	6.21	97.0	15.6	87.0	14.3	78.0	12.4
DJ-18X70G			70.00	5.77	97.0	16.8	87.0	15.4	78.0	13.3
DJ-18X75G			75.00	5.39	97.0	18.0	87.0	16.5	78.0	14.3


* Loads near solid lengths for reference only; overstressed condition.

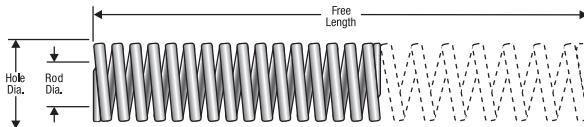

JIS Die Springs HEAVY DUTY (GREEN)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Rate kgf/mm	Max. Oper. Def. 24% Free Length Load kgf	Max. Oper. Def. 24% Free length Deflection mm	Long Life 22% Free Length Load kgf	Long Life 22% Free Length Deflection mm	Optimal Life 19% Free Length Load kgf	Optimal Life 19% Free Length Deflection mm
DJ-18X80G	18.01	9.00	80.00	5.05	97.0	19.2	87.0	17.6	78.0	15.2
DJ-18X90G			90.00	4.50	97.0	21.6	87.0	19.8	78.0	17.1
DJ-18X100G			100.00	4.04	97.0	24.0	87.0	22.0	78.0	19.0
DJ-20X25G	20.02	10.00	25.00	20.00	120.0	6.0	108.0	5.5	96.0	4.8
DJ-20X30G			30.00	16.66	120.0	7.2	108.0	6.6	96.0	5.7
DJ-20X35G			35.00	14.28	120.0	8.4	108.0	7.7	96.0	6.7
DJ-20X40G			40.00	12.50	120.0	9.6	108.0	8.8	96.0	7.6
DJ-20X45G			45.00	11.11	120.0	10.8	108.0	9.9	96.0	8.6
DJ-20X50G			50.00	10.00	120.0	12.0	108.0	11.0	96.0	9.5
DJ-20X55G			55.00	9.09	120.0	13.2	108.0	12.1	96.0	10.5
DJ-20X60G			60.00	8.33	120.0	14.4	108.0	13.2	96.0	11.4
DJ-20X65G			65.00	7.69	120.0	15.6	108.0	14.3	96.0	12.4
DJ-20X70G			70.00	7.14	120.0	16.8	108.0	15.4	96.0	13.3
DJ-20X75G	22.02	11.00	75.00	6.67	120.0	18.0	108.0	16.5	96.0	14.3
DJ-20X80G			80.00	6.25	120.0	19.2	108.0	17.6	96.0	15.2
DJ-20X90G			90.00	5.55	120.0	21.6	108.0	19.8	96.0	17.1
DJ-20X100G			100.00	5.00	120.0	24.0	108.0	22.0	96.0	19.0
DJ-20X125G			125.00	4.00	120.0	30.0	108.0	27.5	96.0	23.8
DJ-20X150G			150.00	3.33	120.0	36.0	108.0	33.0	96.0	28.5
DJ-22X25G	22.02	11.00	25.00	24.16	145.0	6.0	130.0	5.5	116.0	4.8
DJ-22X30G			30.00	20.13	145.0	7.2	130.0	6.6	116.0	5.7
DJ-22X35G			35.00	17.30	145.0	8.4	130.0	7.7	116.0	6.7
DJ-22X40G			40.00	15.10	145.0	9.6	130.0	8.8	116.0	7.6
DJ-22X45G			45.00	13.40	145.0	10.8	130.0	9.9	116.0	8.6
DJ-22X50G			50.00	12.08	145.0	12.0	130.0	11.0	116.0	9.5
DJ-22X55G			55.00	10.94	145.0	13.2	130.0	12.1	116.0	10.5
DJ-22X60G			60.00	10.06	145.0	14.4	130.0	13.2	116.0	11.4
DJ-22X65G			65.00	9.28	145.0	15.6	130.0	14.3	116.0	12.4
DJ-22X70G			70.00	8.63	145.0	16.8	130.0	15.4	116.0	13.3
DJ-22X75G			75.00	8.04	145.0	18.0	130.0	16.5	116.0	14.3
DJ-22X80G	25.02	12.50	80.00	7.55	145.0	19.2	130.0	17.6	116.0	15.2
DJ-22X90G			90.00	6.71	145.0	21.6	130.0	19.8	116.0	17.1
DJ-22X100G			100.00	6.04	145.0	24.0	130.0	22.0	116.0	19.0
DJ-22X125G			125.00	4.83	145.0	30.0	130.0	27.5	116.0	23.8
DJ-22X150G			150.00	4.02	145.0	36.0	130.0	33.0	116.0	28.5
DJ-25X25G	25.02	12.50	25.00	31.20	187.0	6.0	169.0	5.5	150.0	4.8
DJ-25X30G			30.00	25.97	187.0	7.2	169.0	6.6	150.0	5.7
DJ-25X35G			35.00	22.38	187.0	8.4	169.0	7.7	150.0	6.7
DJ-25X40G			40.00	19.47	187.0	9.6	169.0	8.8	150.0	7.6
DJ-25X45G			45.00	17.40	187.0	10.8	169.0	9.9	150.0	8.6
DJ-25X50G			50.00	15.58	187.0	12.0	169.0	11.0	150.0	9.5
DJ-25X55G			55.00	14.20	187.0	13.2	169.0	12.1	150.0	10.5
DJ-25X60G			60.00	12.98	187.0	14.4	169.0	13.2	150.0	11.4
DJ-25X65G			65.00	12.00	187.0	15.6	169.0	14.3	150.0	12.4
DJ-25X70G			70.00	11.13	187.0	16.8	169.0	15.4	150.0	13.3
DJ-25X75G	27.00	13.50	75.00	10.40	187.0	18.0	169.0	16.5	150.0	14.3
DJ-25X80G			80.00	9.73	187.0	19.2	169.0	17.6	150.0	15.2
DJ-25X90G			90.00	8.65	187.0	21.6	169.0	19.8	150.0	17.1
DJ-25X100G			100.00	7.79	187.0	24.0	169.0	22.0	150.0	19.0
DJ-25X125G			125.00	6.23	187.0	30.0	169.0	27.5	150.0	23.8
DJ-25X150G			150.00	5.20	187.0	36.0	169.0	33.0	150.0	28.5
DJ-25X175G			175.00	4.46	187.0	42.0	169.0	38.5	150.0	33.3
DJ-27X25G	30.02	15.00	25.00	36.40	219.0	6.0	197.0	5.5	175.0	4.8
DJ-27X30G			30.00	30.41	219.0	7.2	197.0	6.6	175.0	5.7
DJ-27X35G			35.00	26.20	219.0	8.4	197.0	7.7	175.0	6.7
DJ-27X40G			40.00	22.81	219.0	9.6	197.0	8.8	175.0	7.6
DJ-27X45G			45.00	20.30	219.0	10.8	197.0	9.9	175.0	8.6
DJ-27X50G			50.00	18.25	219.0	12.0	197.0	11.0	175.0	9.5
DJ-27X55G			55.00	16.50	219.0	13.2	197.0	12.1	175.0	10.5
DJ-27X60G			60.00	15.20	219.0	14.4	197.0	13.2	175.0	11.4
DJ-27X65G			65.00	14.00	219.0	15.6	197.0	14.3	175.0	12.4
DJ-27X70G			70.00	13.03	219.0	16.8	197.0	15.4	175.0	13.3
DJ-27X75G			75.00	12.10	219.0	18.0	197.0	16.5	175.0	14.3
DJ-27X80G			80.00	11.40	219.0	19.2	197.0	17.6	175.0	15.2
DJ-27X90G			90.00	10.13	219.0	21.6	197.0	19.8	175.0	17.1
DJ-27X100G			100.00	9.12	219.0	24.0	197.0	22.0	175.0	19.0
DJ-27X125G			125.00	7.30	219.0	30.0	197.0	27.5	175.0	23.8
DJ-27X150G			150.00	6.08	219.0	36.0	197.0	33.0	175.0	28.5
DJ-27X175G			175.00	5.21	219.0	42.0	197.0	38.5	175.0	33.3
DJ-30X25G	30.02	15.00	25.00	45.00	270.0	6.0	243.0	5.5	216.0	4.8
DJ-30X30G			30.00	37.50	270.0	7.2	243.0	6.6	216.0	5.7
DJ-30X35G			35.00	32.26	270.0	8.4	243.0	7.7	216.0	6.7
DJ-30X40G			40.00	28.12	270.0	9.6	243.0	8.8	216.0	7.6
DJ-30X45G			45.00	25.00	270.0	10.8	243.0	9.9	216.0	8.6
DJ-30X50G			50.00	22.50	270.0	12.0	243.0	11.0	216.0	9.5

* Loads near solid lengths for reference only; overstressed condition.

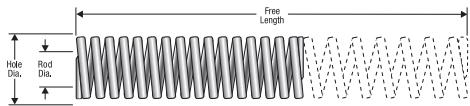


Century Spring

JIS Die Springs HEAVY DUTY (GREEN)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Rate kgf/mm	Max. Oper. Def. 24% Free Length Load kgf	Max. Oper. Def. 24% Free length Deflection mm	Long Life 22% Free Length Load kgf	Long Life 22% Free Length Deflection mm	Optimal Life 19% Free Length Load kgf	Optimal Life 19% Free Length Deflection mm
DJ-30X55G	30.02	15.00	55.00	20.40	270.0	13.2	243.0	12.1	216.0	10.5
DJ-30X60G			60.00	18.75	270.0	14.4	243.0	13.2	216.0	11.4
DJ-30X65G			65.00	17.30	270.0	15.6	243.0	14.3	216.0	12.4
DJ-30X70G			70.00	16.07	270.0	16.8	243.0	15.4	216.0	13.3
DJ-30X75G			75.00	15.00	270.0	18.0	243.0	16.5	216.0	14.3
DJ-30X80G			80.00	14.06	270.0	19.2	243.0	17.6	216.0	15.2
DJ-30X90G			90.00	12.50	270.0	21.6	243.0	19.8	216.0	17.1
DJ-30X100G			100.00	11.25	270.0	24.0	243.0	22.0	216.0	19.0
DJ-30X125G			125.00	9.00	270.0	30.0	243.0	27.5	216.0	23.8
DJ-30X150G			150.00	7.50	270.0	36.0	243.0	33.0	216.0	28.5
DJ-30X175G			175.00	6.42	270.0	42.0	243.0	38.5	216.0	33.3
DJ-30X200G			200.00	5.62	270.0	48.0	243.0	44.0	216.0	38.0
DJ-35X40G	35.00	17.50	40.00	38.22	367.0	9.6	330.0	8.8	293.0	7.6
DJ-35X45G			45.00	33.30	367.0	10.8	330.0	9.9	293.0	8.6
DJ-35X50G			50.00	30.58	367.0	12.0	330.0	11.0	293.0	9.5
DJ-35X55G			55.00	27.80	367.0	13.2	330.0	12.1	293.0	10.5
DJ-35X60G			60.00	25.48	367.0	14.4	330.0	13.2	293.0	11.4
DJ-35X65G			65.00	23.53	367.0	15.6	330.0	14.3	293.0	12.4
DJ-35X70G			70.00	21.84	367.0	16.8	330.0	15.4	293.0	13.3
DJ-35X75G			75.00	20.39	367.0	18.0	330.0	16.5	293.0	14.3
DJ-35X80G			80.00	19.11	367.0	19.2	330.0	17.6	293.0	15.2
DJ-35X90G			90.00	16.99	367.0	21.6	330.0	19.8	293.0	17.1
DJ-35X100G			100.00	15.29	367.0	24.0	330.0	22.0	293.0	19.0
DJ-35X125G			125.00	12.23	367.0	30.0	330.0	27.5	293.0	23.8
DJ-35X150G			150.00	10.19	367.0	36.0	330.0	33.0	293.0	28.5
DJ-35X175G			175.00	8.73	367.0	42.0	330.0	38.5	293.0	33.3
DJ-35X200G			200.00	7.64	367.0	48.0	330.0	44.0	293.0	38.0
DJ-40X40G	40.01	20.00	40.00	50.00	480.0	9.6	432.0	8.8	384.0	7.6
DJ-40X50G			50.00	40.00	480.0	12.0	432.0	11.0	384.0	9.5
DJ-40X60G			60.00	33.33	480.0	14.4	432.0	13.2	384.0	11.4
DJ-40X70G			70.00	28.57	480.0	16.8	432.0	15.4	384.0	13.3
DJ-40X80G			80.00	25.00	480.0	19.2	432.0	17.6	384.0	15.2
DJ-40X90G			90.00	22.22	480.0	21.6	432.0	19.8	384.0	17.1
DJ-40X100G			100.00	20.00	480.0	24.0	432.0	22.0	384.0	19.0
DJ-40X125G			125.00	16.00	480.0	30.0	432.0	27.5	384.0	23.8
DJ-40X150G			150.00	13.33	480.0	36.0	432.0	33.0	384.0	28.5
DJ-40X175G			175.00	11.42	480.0	42.0	432.0	38.5	384.0	33.3
DJ-40X200G			200.00	10.00	480.0	48.0	432.0	44.0	384.0	38.0
DJ-40X250G			250.00	8.00	480.0	60.0	432.0	55.0	384.0	47.5
DJ-50X50G	50.01	25.00	50.00	62.50	750.0	12.0	675.0	11.0	600.0	9.5
DJ-50X60G			60.00	52.08	750.0	14.4	675.0	13.2	600.0	11.4
DJ-50X70G			70.00	44.64	750.0	16.8	675.0	15.4	600.0	13.3
DJ-50X80G			80.00	39.06	750.0	19.2	675.0	17.6	600.0	15.2
DJ-50X90G			90.00	34.72	750.0	21.6	675.0	19.8	600.0	17.1
DJ-50X100G			100.00	31.25	750.0	24.0	675.0	22.0	600.0	19.0
DJ-50X125G			125.00	25.00	750.0	30.0	675.0	27.5	600.0	23.8
DJ-50X150G			150.00	20.83	750.0	36.0	675.0	33.0	600.0	28.5
DJ-50X175G			175.00	17.85	750.0	42.0	675.0	38.5	600.0	33.3
DJ-50X200G			200.00	15.62	750.0	48.0	675.0	44.0	600.0	38.0
DJ-50X250G			250.00	12.50	750.0	60.0	675.0	55.0	600.0	47.5
DJ-50X300G			300.00	10.41	750.0	72.0	675.0	66.0	600.0	57.0
DJ-60X60G	60.02	30.00	60.00	75.00	1080.0	14.4	973.0	13.2	864.0	11.4
DJ-60X70G			70.00	64.28	1080.0	16.8	973.0	15.4	864.0	13.3
DJ-60X80G			80.00	56.25	1080.0	19.2	973.0	17.6	864.0	15.2
DJ-60X90G			90.00	50.00	1080.0	21.6	973.0	19.8	864.0	17.1
DJ-60X100G			100.00	45.00	1080.0	24.0	973.0	22.0	864.0	19.0
DJ-60X125G			125.00	36.00	1080.0	30.0	973.0	27.5	864.0	23.8
DJ-60X150G			150.00	30.00	1080.0	36.0	973.0	33.0	864.0	28.5
DJ-60X175G			175.00	25.71	1080.0	42.0	973.0	38.5	864.0	33.3
DJ-60X200G			200.00	22.50	1080.0	48.0	973.0	44.0	864.0	38.0
DJ-60X250G			250.00	18.00	1080.0	60.0	973.0	55.0	864.0	47.5
DJ-60X300G			300.00	15.00	1080.0	72.0	973.0	66.0	864.0	57.0

* Loads near solid lengths for reference only; overstressed condition.

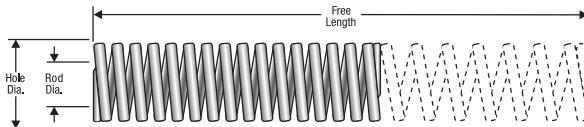


JIS Die Springs EXTRA HEAVY DUTY (BROWN)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Rate kgf/mm	Max. Oper. Def. 20% Free Length		Long Life 18% Free Length Load kgf	Long Life 18% Free Length Deflection mm	Optimal Life 16% Free Length Load kgf	Optimal Life 16% Free Length Deflection mm
					Load kgf	Deflection mm				
DJ-8X10BR	8.00	4.00	10.00	16.94	35.0	2.0	30.5	1.8	26.0	1.6
DJ-8X15BR			15.00	11.30	35.0	3.0	30.5	2.7	26.0	2.4
DJ-8X20BR			20.00	8.47	35.0	4.0	30.5	3.6	26.0	3.2
DJ-8X25BR			25.00	6.78	35.0	5.0	30.5	4.5	26.0	4.0
DJ-8X30BR			30.00	5.65	35.0	6.0	30.5	5.4	26.0	4.8
DJ-8X35BR			35.00	4.84	35.0	7.0	30.5	6.3	26.0	5.6
DJ-8X40BR			40.00	4.20	35.0	8.0	30.5	7.2	26.0	6.4
DJ-8X45BR			45.00	3.77	35.0	9.0	30.5	8.1	26.0	7.2
DJ-8X50BR			50.00	3.39	35.0	10.0	30.5	9.0	26.0	8.0
DJ-8X55BR			55.00	3.08	35.0	11.0	30.5	9.9	26.0	8.8
DJ-8X60BR			60.00	2.82	35.0	12.0	30.5	10.8	26.0	9.6
DJ-10X20BR	10.01	5.00	20.00	11.25	45.0	4.0	41.0	3.6	36.0	3.2
DJ-10X25BR			25.00	9.00	45.0	5.0	41.0	4.5	36.0	4.0
DJ-10X30BR			30.00	7.50	45.0	6.0	41.0	5.4	36.0	4.8
DJ-10X35BR			35.00	6.43	45.0	7.0	41.0	6.3	36.0	5.6
DJ-10X40BR			40.00	5.63	45.0	8.0	41.0	7.2	36.0	6.4
DJ-10X45BR			45.00	5.00	45.0	9.0	41.0	8.1	36.0	7.2
DJ-10X50BR			50.00	4.50	45.0	10.0	41.0	9.0	36.0	8.0
DJ-10X55BR			55.00	4.09	45.0	11.0	41.0	9.9	36.0	8.8
DJ-10X60BR			60.00	3.75	45.0	12.0	41.0	10.8	36.0	9.6
DJ-10X65BR			65.00	3.47	45.0	13.0	41.0	11.7	36.0	10.4
DJ-10X70BR			70.00	3.21	45.0	14.0	41.0	12.6	36.0	11.2
DJ-10X75BR			75.00	3.00	45.0	15.0	41.0	13.5	36.0	12.0
DJ-10X80BR			80.00	2.82	45.0	16.0	41.0	14.4	36.0	12.8
DJ-12X20BR	12.01	6.00	20.00	14.50	58.0	4.0	52.0	3.6	46.0	3.2
DJ-12X25BR			25.00	11.60	58.0	5.0	52.0	4.5	46.0	4.0
DJ-12X30BR			30.00	9.67	58.0	6.0	52.0	5.4	46.0	4.8
DJ-12X35BR			35.00	8.29	58.0	7.0	52.0	6.3	46.0	5.6
DJ-12X40BR			40.00	7.25	58.0	8.0	52.0	7.2	46.0	6.4
DJ-12X45BR			45.00	6.44	58.0	9.0	52.0	8.1	46.0	7.2
DJ-12X50BR			50.00	5.80	58.0	10.0	52.0	9.0	46.0	8.0
DJ-12X55BR			55.00	5.27	58.0	11.0	52.0	9.9	46.0	8.8
DJ-12X60BR			60.00	4.83	58.0	12.0	52.0	10.8	46.0	9.6
DJ-12X65BR			65.00	4.44	58.0	13.0	52.0	11.7	46.0	10.4
DJ-12X70BR			70.00	4.13	58.0	14.0	52.0	12.6	46.0	11.2
DJ-12X75BR			75.00	3.85	58.0	15.0	52.0	13.5	46.0	12.0
DJ-12X80BR			80.00	3.61	58.0	16.0	52.0	14.4	46.0	12.8
DJ-14X25BR	14.02	7.00	25.00	15.00	75.0	5.0	68.0	4.5	60.0	4.0
DJ-14X30BR			30.00	12.50	75.0	6.0	68.0	5.4	60.0	4.8
DJ-14X35BR			35.00	10.72	75.0	7.0	68.0	6.3	60.0	5.6
DJ-14X40BR			40.00	9.38	75.0	8.0	68.0	7.2	60.0	6.4
DJ-14X45BR			45.00	8.34	75.0	9.0	68.0	8.1	60.0	7.2
DJ-14X50BR			50.00	7.50	75.0	10.0	68.0	9.0	60.0	8.0
DJ-14X55BR			55.00	6.82	75.0	11.0	68.0	9.9	60.0	8.8
DJ-14X60BR			60.00	6.25	75.0	12.0	68.0	10.8	60.0	9.6
DJ-14X65BR			65.00	5.77	75.0	13.0	68.0	11.7	60.0	10.4
DJ-14X70BR			70.00	5.36	75.0	14.0	68.0	12.6	60.0	11.2
DJ-14X75BR			75.00	5.00	75.0	15.0	68.0	13.5	60.0	12.0
DJ-14X80BR			80.00	4.69	75.0	16.0	68.0	14.4	60.0	12.8
DJ-14X90BR			90.00	4.17	75.0	18.0	68.0	16.2	60.0	14.4
DJ-16X25BR	16.00	8.00	25.00	20.00	100.0	5.0	90.0	4.5	80.0	4.0
DJ-16X30BR			30.00	16.67	100.0	6.0	90.0	5.4	80.0	4.8
DJ-16X35BR			35.00	14.29	100.0	7.0	90.0	6.3	80.0	5.6
DJ-16X40BR			40.00	12.50	100.0	8.0	90.0	7.2	80.0	6.4
DJ-16X45BR			45.00	11.11	100.0	9.0	90.0	8.1	80.0	7.2
DJ-16X50BR			50.00	10.00	100.0	10.0	90.0	9.0	80.0	8.0
DJ-16X55BR			55.00	9.09	100.0	11.0	90.0	9.9	80.0	8.8
DJ-16X60BR			60.00	8.34	100.0	12.0	90.0	10.8	80.0	9.6
DJ-16X65BR			65.00	7.69	100.0	13.0	90.0	11.7	80.0	10.4
DJ-16X70BR			70.00	7.14	100.0	14.0	90.0	12.6	80.0	11.2
DJ-16X75BR			75.00	6.67	100.0	15.0	90.0	13.5	80.0	12.0
DJ-16X80BR			80.00	6.25	100.0	16.0	90.0	14.4	80.0	12.8
DJ-16X90BR			90.00	5.56	100.0	18.0	90.0	16.2	80.0	14.4
DJ-16X100BR			100.00	5.00	100.0	20.0	90.0	18.0	80.0	16.0
DJ-18X25BR	18.01	9.00	25.00	25.00	125.0	5.0	113.0	4.5	100.0	4.0
DJ-18X30BR			30.00	20.84	125.0	6.0	113.0	5.4	100.0	4.8
DJ-18X35BR			35.00	17.86	125.0	7.0	113.0	6.3	100.0	5.6
DJ-18X40BR			40.00	15.63	125.0	8.0	113.0	7.2	100.0	6.4
DJ-18X45BR			45.00	13.89	125.0	9.0	113.0	8.1	100.0	7.2
DJ-18X50BR			50.00	12.50	125.0	10.0	113.0	9.0	100.0	8.0
DJ-18X55BR			55.00	11.37	125.0	11.0	113.0	9.9	100.0	8.8
DJ-18X60BR			60.00	10.42	125.0	12.0	113.0	10.8	100.0	9.6
DJ-18X65BR			65.00	9.62	125.0	13.0	113.0	11.7	100.0	10.4
DJ-18X70BR			70.00	8.93	125.0	14.0	113.0	12.6	100.0	11.2
DJ-18X75BR			75.00	8.34	125.0	15.0	113.0	13.5	100.0	12.0

* Loads near solid lengths for reference only; overstressed condition.

Can't find what you're looking for? Request a custom quote. Email customquote@centuryspring.com

Century Spring Catalog

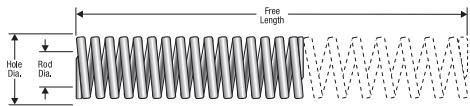


Century Spring

JIS Die Springs EXTRA HEAVY DUTY (BROWN)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Rate kgf/mm	Max. Oper. Def. 20% Free Length Load kgf	Max. Oper. Def. 20% Free length Deflection mm	Long Life 18% Free Length Load kgf	Long Life 18% Free Length Deflection mm	Optimal Life 16% Free Length Load kgf	Optimal Life 16% Free Length Deflection mm
DJ-18X80BR	18.01	9.00	80.00	7.82	125.0	16.0	113.0	14.4	100.0	12.8
DJ-18X90BR			90.00	6.95	125.0	18.0	113.0	16.2	100.0	14.4
DJ-18X100BR			100.00	6.26	125.0	20.0	113.0	18.0	100.0	16.0
DJ-20X25BR	20.02	10.00	25.00	32.00	160.0	5.0	144.0	4.5	128.0	4.0
DJ-20X30BR			30.00	26.67	160.0	6.0	144.0	5.4	128.0	4.8
DJ-20X35BR			35.00	22.86	160.0	7.0	144.0	6.3	128.0	5.6
DJ-20X40BR			40.00	20.00	160.0	8.0	144.0	7.2	128.0	6.4
DJ-20X45BR			45.00	17.78	160.0	9.0	144.0	8.1	128.0	7.2
DJ-20X50BR			50.00	16.00	160.0	10.0	144.0	9.0	128.0	8.0
DJ-20X55BR			55.00	14.55	160.0	11.0	144.0	9.9	128.0	8.8
DJ-20X60BR			60.00	13.33	160.0	12.0	144.0	10.8	128.0	9.6
DJ-20X65BR			65.00	12.31	160.0	13.0	144.0	11.7	128.0	10.4
DJ-20X70BR			70.00	11.43	160.0	14.0	144.0	12.6	128.0	11.2
DJ-20X75BR			75.00	10.67	160.0	15.0	144.0	13.5	128.0	12.0
DJ-20X80BR			80.00	10.00	160.0	16.0	144.0	14.4	128.0	12.8
DJ-20X90BR	20.02	10.00	90.00	8.89	160.0	18.0	144.0	16.2	128.0	14.4
DJ-20X100BR			100.00	8.00	160.0	20.0	144.0	18.0	128.0	16.0
DJ-20X125BR			125.00	6.40	160.0	25.0	144.0	22.5	128.0	20.0
DJ-20X150BR			150.00	5.33	160.0	30.0	144.0	27.0	128.0	24.0
DJ-22X25BR	22.02	11.00	25.00	39.00	195.0	5.0	176.0	4.5	156.0	4.0
DJ-22X30BR			30.00	32.50	195.0	6.0	176.0	5.4	156.0	4.8
DJ-22X35BR			35.00	27.86	195.0	7.0	176.0	6.3	156.0	5.6
DJ-22X40BR			40.00	24.38	195.0	8.0	176.0	7.2	156.0	6.4
DJ-22X45BR			45.00	21.67	195.0	9.0	176.0	8.1	156.0	7.2
DJ-22X50BR			50.00	19.50	195.0	10.0	176.0	9.0	156.0	8.0
DJ-22X55BR			55.00	17.73	195.0	11.0	176.0	9.9	156.0	8.8
DJ-22X60BR			60.00	16.25	195.0	12.0	176.0	10.8	156.0	9.6
DJ-22X65BR			65.00	15.00	195.0	13.0	176.0	11.7	156.0	10.4
DJ-22X70BR			70.00	13.93	195.0	14.0	176.0	12.6	156.0	11.2
DJ-22X75BR			75.00	13.00	195.0	15.0	176.0	13.5	156.0	12.0
DJ-22X80BR			80.00	12.19	195.0	16.0	176.0	14.4	156.0	12.8
DJ-22X90BR			90.00	10.83	195.0	18.0	176.0	16.2	156.0	14.4
DJ-22X100BR			100.00	9.75	195.0	20.0	176.0	18.0	156.0	16.0
DJ-22X125BR			125.00	7.80	195.0	25.0	176.0	22.5	156.0	20.0
DJ-22X150BR			150.00	6.50	195.0	30.0	176.0	27.0	156.0	24.0
DJ-25X25BR	25.02	12.50	25.00	49.00	245.0	5.0	221.0	4.5	196.0	4.0
DJ-25X30BR			30.00	40.80	245.0	6.0	221.0	5.4	196.0	4.8
DJ-25X35BR			35.00	35.00	245.0	7.0	221.0	6.3	196.0	5.6
DJ-25X40BR			40.00	30.60	245.0	8.0	221.0	7.2	196.0	6.4
DJ-25X45BR			45.00	27.20	245.0	9.0	221.0	8.1	196.0	7.2
DJ-25X50BR			50.00	24.50	245.0	10.0	221.0	9.0	196.0	8.0
DJ-25X55BR			55.00	22.30	245.0	11.0	221.0	9.9	196.0	8.8
DJ-25X60BR			60.00	20.40	245.0	12.0	221.0	10.8	196.0	9.6
DJ-25X65BR			65.00	18.80	245.0	13.0	221.0	11.7	196.0	10.4
DJ-25X70BR			70.00	17.50	245.0	14.0	221.0	12.6	196.0	11.2
DJ-25X75BR			75.00	16.30	245.0	15.0	221.0	13.5	196.0	12.0
DJ-25X80BR			80.00	15.30	245.0	16.0	221.0	14.4	196.0	12.8
DJ-25X90BR			90.00	13.60	245.0	18.0	221.0	16.2	196.0	14.4
DJ-25X100BR			100.00	12.30	245.0	20.0	221.0	18.0	196.0	16.0
DJ-25X125BR			125.00	9.80	245.0	25.0	221.0	22.5	196.0	20.0
DJ-25X150BR			150.00	8.17	245.0	30.0	221.0	27.0	196.0	24.0
DJ-25X175BR			175.00	7.00	245.0	35.0	221.0	31.5	196.0	28.0
DJ-27X25BR	27.00	13.50	25.00	58.00	290.0	5.0	261.0	4.5	232.0	4.0
DJ-27X30BR			30.00	48.33	290.0	6.0	261.0	5.4	232.0	4.8
DJ-27X35BR			35.00	41.43	290.0	7.0	261.0	6.3	232.0	5.6
DJ-27X40BR			40.00	36.25	290.0	8.0	261.0	7.2	232.0	6.4
DJ-27X45BR			45.00	32.22	290.0	9.0	261.0	8.1	232.0	7.2
DJ-27X50BR			50.00	29.00	290.0	10.0	261.0	9.0	232.0	8.0
DJ-27X55BR			55.00	26.36	290.0	11.0	261.0	9.9	232.0	8.8
DJ-27X60BR			60.00	24.17	290.0	12.0	261.0	10.8	232.0	9.6
DJ-27X65BR			65.00	22.31	290.0	13.0	261.0	11.7	232.0	10.4
DJ-27X70BR			70.00	20.71	290.0	14.0	261.0	12.6	232.0	11.2
DJ-27X75BR			75.00	19.33	290.0	15.0	261.0	13.5	232.0	12.0
DJ-27X80BR			80.00	18.13	290.0	16.0	261.0	14.4	232.0	12.8
DJ-27X90BR			90.00	16.11	290.0	18.0	261.0	16.2	232.0	14.4
DJ-27X100BR			100.00	14.50	290.0	20.0	261.0	18.0	232.0	16.0
DJ-27X125BR			125.00	11.60	290.0	25.0	261.0	22.5	232.0	20.0
DJ-27X150BR			150.00	9.67	290.0	30.0	261.0	27.0	232.0	24.0
DJ-27X175BR			175.00	8.28	290.0	35.0	261.0	31.5	232.0	28.0
DJ-30X25BR	30.02	15.00	25.00	72.00	360.0	5.0	324.0	4.5	288.0	4.0
DJ-30X30BR			30.00	60.00	360.0	6.0	324.0	5.4	288.0	4.8
DJ-30X35BR			35.00	51.43	360.0	7.0	324.0	6.3	288.0	5.6
DJ-30X40BR			40.00	45.00	360.0	8.0	324.0	7.2	288.0	6.4
DJ-30X45BR			45.00	40.00	360.0	9.0	324.0	8.1	288.0	7.2
DJ-30X50BR			50.00	36.00	360.0	10.0	324.0	9.0	288.0	8.0


* Loads near solid lengths for reference only; overstressed condition.

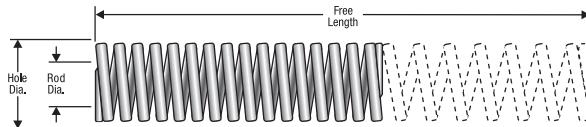

JIS Die Springs EXTRA HEAVY DUTY (BROWN)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Rate kgf/mm	Max. Oper. Def. 20% Free Length		Long Life 18% Free Length Load kgf	Long Life 18% Free Length Deflection mm	Optimal Life 16% Free Length Load kgf	Optimal Life 16% Free Length Deflection mm
					Load kgf	Deflection mm				
DJ-30X55BR	30.02	15.00	55.00	32.72	360.0	11.0	324.0	9.9	288.0	8.8
DJ-30X60BR			60.00	30.00	360.0	12.0	324.0	10.8	288.0	9.6
DJ-30X65BR			65.00	27.69	360.0	13.0	324.0	11.7	288.0	10.4
DJ-30X70BR			70.00	25.71	360.0	14.0	324.0	12.6	288.0	11.2
DJ-30X75BR			75.00	24.00	360.0	15.0	324.0	13.5	288.0	12.0
DJ-30X80BR			80.00	22.50	360.0	16.0	324.0	14.4	288.0	12.8
DJ-30X90BR			90.00	20.00	360.0	18.0	324.0	16.2	288.0	14.4
DJ-30X100BR			100.00	18.00	360.0	20.0	324.0	18.0	288.0	16.0
DJ-30X125BR			125.00	14.40	360.0	25.0	324.0	22.5	288.0	20.0
DJ-30X150BR			150.00	12.00	360.0	30.0	324.0	27.0	288.0	24.0
DJ-30X175BR			175.00	10.28	360.0	35.0	324.0	31.5	288.0	28.0
DJ-30X200BR			200.00	9.00	360.0	40.0	324.0	36.0	288.0	32.0
DJ-35X40BR	35.00	17.50	40.00	61.20	490.0	8.0	441.0	7.2	392.0	6.4
DJ-35X45BR			45.00	54.44	490.0	9.0	441.0	8.1	392.0	7.2
DJ-35X50BR			50.00	49.00	490.0	10.0	441.0	9.0	392.0	8.0
DJ-35X55BR			55.00	44.54	490.0	11.0	441.0	9.9	392.0	8.8
DJ-35X60BR			60.00	40.83	490.0	12.0	441.0	10.8	392.0	9.6
DJ-35X65BR			65.00	37.69	490.0	13.0	441.0	11.7	392.0	10.4
DJ-35X70BR			70.00	35.00	490.0	14.0	441.0	12.6	392.0	11.2
DJ-35X75BR			75.00	32.67	490.0	15.0	441.0	13.5	392.0	12.0
DJ-35X80BR			80.00	30.62	490.0	16.0	441.0	14.4	392.0	12.8
DJ-35X90BR			90.00	27.22	490.0	18.0	441.0	16.2	392.0	14.4
DJ-35X100BR			100.00	24.50	490.0	20.0	441.0	18.0	392.0	16.0
DJ-35X125BR			125.00	19.60	490.0	25.0	441.0	22.5	392.0	20.0
DJ-35X150BR			150.00	16.33	490.0	30.0	441.0	27.0	392.0	24.0
DJ-35X175BR			175.00	14.00	490.0	35.0	441.0	31.5	392.0	28.0
DJ-35X200BR			200.00	12.25	490.0	40.0	441.0	36.0	392.0	32.0
DJ-40X40BR	40.01	20.00	40.00	80.00	640.0	8.0	576.0	7.2	512.0	6.4
DJ-40X50BR			50.00	64.00	640.0	10.0	576.0	9.0	512.0	8.0
DJ-40X60BR			60.00	53.33	640.0	12.0	576.0	10.8	512.0	9.6
DJ-40X70BR			70.00	45.71	640.0	14.0	576.0	12.6	512.0	11.2
DJ-40X80BR			80.00	40.00	640.0	16.0	576.0	14.4	512.0	12.8
DJ-40X90BR			90.00	35.55	640.0	18.0	576.0	16.2	512.0	14.4
DJ-40X100BR			100.00	32.00	640.0	20.0	576.0	18.0	512.0	16.0
DJ-40X125BR			125.00	25.60	640.0	25.0	576.0	22.5	512.0	20.0
DJ-40X150BR			150.00	21.33	640.0	30.0	576.0	27.0	512.0	24.0
DJ-40X175BR			175.00	18.28	640.0	35.0	576.0	31.5	512.0	28.0
DJ-40X200BR			200.00	15.00	640.0	40.0	576.0	36.0	512.0	32.0
DJ-40X250BR			250.00	12.80	640.0	50.0	576.0	45.0	512.0	40.0
DJ-50X50BR	50.01	25.00	50.00	100.00	1000.0	10.0	900.0	9.0	800.0	8.0
DJ-50X60BR			60.00	83.33	1000.0	12.0	900.0	10.8	800.0	9.6
DJ-50X70BR			70.00	71.42	1000.0	14.0	900.0	12.6	800.0	11.2
DJ-50X80BR			80.00	62.50	1000.0	16.0	900.0	14.4	800.0	12.8
DJ-50X90BR			90.00	55.55	1000.0	18.0	900.0	16.2	800.0	14.4
DJ-50X100BR			100.00	50.00	1000.0	20.0	900.0	18.0	800.0	16.0
DJ-50X125BR			125.00	40.00	1000.0	25.0	900.0	22.5	800.0	20.0
DJ-50X150BR			150.00	33.33	1000.0	30.0	900.0	27.0	800.0	24.0
DJ-50X175BR			175.00	27.57	1000.0	35.0	900.0	31.5	800.0	28.0
DJ-50X200BR			200.00	25.00	1000.0	40.0	900.0	36.0	800.0	32.0
DJ-50X250BR			250.00	20.00	1000.0	50.0	900.0	45.0	800.0	40.0
DJ-50X300BR			300.00	16.66	1000.0	60.0	900.0	54.0	800.0	48.0
DJ-60X60BR	60.02	30.00	60.00	120.00	1440.0	12.0	1296.0	10.8	1152.0	9.6
DJ-60X70BR			70.00	102.00	1440.0	14.0	1296.0	12.6	1152.0	11.2
DJ-60X80BR			80.00	90.00	1440.0	16.0	1296.0	14.4	1152.0	12.8
DJ-60X90BR			90.00	80.00	1440.0	18.0	1296.0	16.2	1152.0	14.4
DJ-60X100BR			100.00	72.00	1440.0	20.0	1296.0	18.0	1152.0	16.0
DJ-60X125BR			125.00	57.60	1440.0	25.0	1296.0	22.5	1152.0	20.0
DJ-60X150BR			150.00	48.00	1440.0	30.0	1296.0	27.0	1152.0	24.0
DJ-60X175BR			175.00	41.14	1440.0	35.0	1296.0	31.5	1152.0	28.0
DJ-60X200BR			200.00	36.00	1440.0	40.0	1296.0	36.0	1152.0	32.0
DJ-60X250BR			250.00	28.80	1440.0	50.0	1296.0	45.0	1152.0	40.0
DJ-60X300BR			300.00	24.00	1440.0	60.0	1296.0	54.0	1152.0	48.0

* Loads near solid lengths for reference only; overstressed condition.

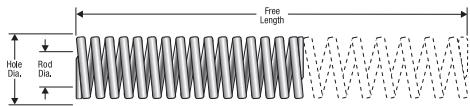


Century Spring

ISO Metric Die Springs ULTRA LIGHT DUTY (LIGHT GREEN)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Spring Rate N/mm	Load 30% Free Length N	Deflection 30% Free Length mm	Load 40% Free Length N	Deflection 40% Free Length mm	Load 50% Free Length N	Deflection 50% Free Length mm	Max Load N	Max Defl. mm
D-302404	20.00	10.00	25.00	29.4	221	7.5	294	10.0	368	12.5	488	16.6
D-302405			32.00	22.6	217	9.6	289	12.8	362	16.0	488	21.6
D-302406			38.00	18.6	212	11.4	283	15.2	353	19.0	476	25.6
D-302407			44.00	15.7	207	13.2	276	17.6	345	22.0	468	29.8
D-302408			51.00	13.7	210	15.3	279	20.4	349	25.5	478	34.9
D-302410			64.00	11.3	217	19.2	289	25.6	362	32.0	507	44.9
D-302412			76.00	9.8	223	22.8	298	30.4	372	38.0	530	54.1
D-302414			89.00	8.3	222	26.7	295	35.6	369	44.5	526	63.4
D-302416			102.00	7.4	226	30.6	302	40.8	377	51.0	544	73.5
D-302418			114.00	6.4	219	34.2	292	45.6	365	57.0	521	81.4
D-302420			127.00	5.9	225	38.1	300	50.8	375	63.5	542	91.9
D-302422			140.00	5.4	227	42.0	302	56.0	378	70.0	549	101.6
D-302424			152.00	4.9	223	45.6	298	60.8	372	76.0	539	109.9
D-302448			305.00	2.5	229	91.5	305	122.0	381	152.6	556	222.6
D-302504	25.00	12.50	25.00	53.9	404	7.5	539	10.0	674	12.5	782	14.5
D-302505			32.00	42.2	405	9.6	540	12.8	675	16.0	806	19.1
D-302506			38.00	35.8	408	11.4	544	15.2	680	19.0	831	23.2
D-302507			44.00	31.4	414	13.2	553	17.6	691	22.0	860	27.4
D-302508			51.00	27.0	413	15.3	551	20.4	689	25.5	869	32.2
D-302510			64.00	21.6	415	19.2	553	25.6	691	32.0	886	41.0
D-302512			76.00	18.1	413	22.8	550	30.4	688	38.0	889	49.1
D-302514			89.00	15.2	406	26.7	541	35.6	676	44.5	869	57.2
D-302516			102.00	13.2	404	30.6	539	40.8	673	51.0	870	65.9
D-302518			114.00	11.8	404	34.2	538	45.6	673	57.0	870	73.7
D-302520			127.00	10.6	404	38.1	538	50.8	673	63.5	878	82.8
D-302522			140.00	9.6	403	42.0	538	56.0	672	70.0	876	91.3
D-302524			152.00	8.8	401	45.6	535	60.8	669	76.0	869	98.8
D-302526			178.00	7.6	406	53.4	541	71.2	676	89.0	885	116.4
D-302532			203.00	6.7	408	60.9	544	81.2	680	101.5	895	133.7
D-302548			305.00	4.4	403	91.5	537	122.0	671	152.6	884	200.9
D-302606	32.00	16.00	38.00	43.1	491	11.4	655	15.2	819	19.0	1065	24.7
D-302607			44.00	37.3	492	13.2	656	17.6	821	22.0	1082	29.0
D-302608			51.00	32.4	496	15.3	661	20.4	826	25.5	1105	34.1
D-302610			64.00	25.5	490	19.2	653	25.6	816	32.0	1107	43.4
D-302612			76.00	21.6	492	22.8	657	30.4	821	38.0	1128	52.2
D-302614			89.00	18.1	483	26.7	644	35.6	805	44.5	1102	60.9
D-302616			102.00	15.7	480	30.6	641	40.8	801	51.0	1099	70.0
D-302618			114.00	14.2	486	34.2	648	45.6	809	57.0	1115	78.5
D-302620			127.00	12.7	484	38.1	645	50.8	806	63.5	1118	88.0
D-302622			140.00	11.6	487	42.0	650	56.0	812	70.0	1131	97.5
D-302624			152.00	10.6	483	45.6	644	60.8	806	76.0	1120	105.7
D-302626			178.00	9.0	481	53.4	641	71.2	801	89.0	1113	123.7
D-302632			203.00	7.8	475	60.9	633	81.2	792	101.5	1100	141.1
D-302640			254.00	6.4	488	76.2	650	101.6	813	127.1	1146	179.1
D-302648			305.00	5.3	485	91.5	647	122.0	808	152.6	1140	215.1
D-302708	40.00	20.00	51.00	48.1	736	15.3	981	20.4	1227	25.5	1481	30.8
D-302710			64.00	39.2	753	19.2	1004	25.6	1254	32.0	1560	39.8
D-302712			76.00	33.3	759	22.8	1012	30.4	1265	38.0	1602	48.1
D-302714			89.00	28.4	758	26.7	1011	35.6	1264	44.5	1613	56.8
D-302716			102.00	24.5	750	30.6	1000	40.8	1250	51.0	1588	64.8
D-302718			114.00	22.1	766	34.2	1008	45.6	1260	57.0	1622	73.4
D-302720			127.00	19.6	747	38.1	996	50.8	1245	63.5	1601	81.7
D-302722			140.00	17.7	743	42.0	991	56.0	1239	70.0	1595	90.1
D-302724			152.00	16.2	739	45.6	985	60.8	1231	76.0	1583	97.7
D-302726			178.00	13.7	732	53.4	975	71.2	1219	89.0	1567	114.4
D-302732			203.00	12.3	749	60.9	999	81.2	1248	101.5	1630	132.6
D-302740			254.00	9.8	747	76.2	996	101.6	1245	127.1	1631	166.5
D-302748			305.00	8.3	799	91.5	1013	122.0	1266	152.6	1676	202.0
D-302810	50.00	25.00	64.00	86.3	1657	19.2	2209	25.6	2762	32.0	3461	40.1
D-302812			76.00	70.6	1610	22.8	2146	30.4	2683	38.0	3382	47.9
D-302814			89.00	59.8	1597	26.7	2129	35.6	2661	44.5	3373	56.4
D-302816			102.00	52.0	1591	30.6	2122	40.8	2652	51.0	3390	65.2
D-302818			114.00	46.1	1577	34.2	2102	45.6	2628	57.0	3379	73.3
D-302820			127.00	42.2	1608	38.1	2144	50.8	2680	63.5	3482	82.5
D-302822			140.00	38.2	1604	42.0	2139	56.0	2674	70.0	3503	91.7
D-302824			152.00	34.3	1564	45.6	2085	60.8	2607	76.0	3375	98.4
D-302826			178.00	29.4	1570	53.4	2093	71.2	2617	89.0	3410	116.0
D-302828			203.00	25.5	1553	60.9	2071	81.2	2588	101.5	3376	132.5
D-302830			254.00	20.6	1570	76.2	2093	101.6	2616	127.1	3459	168.0
D-302848			305.00	17.2	1574	91.5	2098	122.0	2623	152.6	3483	202.6


* Loads near solid lengths for reference only; overstressed condition.

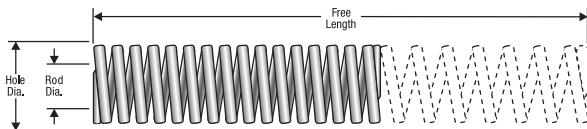

ISO Metric Die Springs LIGHT DUTY (GREEN)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Spring Rate N/mm	Load 25% Free Length N	Deflection 25% Free Length mm	Load 30% Free Length N	Deflection 30% Free Length mm	Load 40% Free Length N	Deflection 40% Free Length mm	Max Load N	Max Defl. mm
D-303104	10.0	5.00	25.00	12.2	76	6.3	92	7.5	122	10.0	156	12.8
D-303105			32.00	9.9	79	8.0	95	9.6	127	12.8	172	17.3
D-303106			38.00	8.2	78	9.5	94	11.4	125	15.2	168	20.5
D-303107			44.00	6.4	71	11.0	85	13.2	113	17.6	155	24.1
D-303108			51.00	6.3	80	12.8	96	15.3	129	20.4	174	27.6
D-303110			64.00	5.3	85	16.0	102	19.2	135	25.6	198	37.5
D-303112			76.00	4.3	81	19.0	97	22.8	129	30.4	184	43.4
D-303148			305.00	1.0	79	76.3	95	91.5	127	122.0	183	176.1
D-303204	12.5	7.00	25.00	18.6	116	6.3	139	7.5	186	10.0	292	15.7
D-303205			32.00	14.9	119	8.0	143	9.6	190	12.8	309	20.8
D-303206			38.00	12.7	121	9.5	145	11.4	194	15.2	321	25.2
D-303207			44.00	11.1	123	11.0	147	13.2	196	17.6	329	29.5
D-303208			51.00	9.3	118	12.8	142	15.3	190	20.4	315	33.9
D-303210			64.00	7.2	115	16.0	138	19.2	184	25.6	305	42.4
D-303212			76.00	5.9	112	19.0	134	22.8	178	30.4	292	49.8
D-303214			89.00	4.7	105	22.3	127	26.7	169	35.6	270	57.0
D-303216	16.0	8.50	102.00	4.1	105	25.5	125	30.6	167	40.8	239	58.4
D-303248			305.00	1.4	104	76.3	124	91.5	166	122.0	268	197.0
D-303304			25.00	31.7	198	6.3	238	7.5	317	10.0	441	13.9
D-303305			32.00	23.2	186	8.0	223	9.6	297	12.8	409	17.6
D-303306			38.00	20.5	195	9.5	234	11.4	312	15.2	449	21.9
D-303307			44.00	17.9	197	11.0	236	13.2	315	17.6	461	25.8
D-303308			51.00	15.5	198	12.8	237	15.3	316	20.4	470	30.3
D-303310			64.00	12.7	203	16.0	243	19.2	325	25.6	496	39.1
D-303312	20.0	10.00	76.00	10.0	189	19.0	227	22.8	303	30.4	446	44.8
D-303314			89.00	8.9	199	22.3	239	26.7	318	35.6	486	54.4
D-303316			102.00	7.6	193	25.5	232	30.6	309	40.8	486	64.1
D-303318			114.00	6.6	188	28.5	226	34.2	301	45.6	401	60.8
D-303348			305.00	2.6	195	76.3	234	91.5	312	122.0	484	189.0
D-303404			25.00	55.4	346	6.3	415	7.5	554	10.0	742	13.4
D-303405			32.00	43.4	347	8.0	416	9.6	555	12.8	772	17.8
D-303406			38.00	34.4	327	9.5	392	11.4	523	15.2	712	20.7
D-303407	25.0	12.50	44.00	27.7	305	11.0	366	13.2	488	17.6	637	23.0
D-303408			51.00	24.9	318	12.8	381	15.3	509	20.4	591	23.7
D-303410			64.00	18.8	301	16.0	361	19.2	482	25.6	643	34.2
D-303412			76.00	16.1	306	19.0	367	22.8	489	30.4	667	41.5
D-303414			89.00	13.1	292	22.3	350	26.7	467	35.6	619	47.2
D-303416			102.00	11.9	303	25.5	363	30.6	484	40.8	666	56.1
D-303418			114.00	11.0	315	28.5	378	34.2	504	45.6	717	65.4
D-303420			127.00	9.4	298	31.8	358	38.1	478	50.8	665	70.7
D-303422	32.0	16.00	140.00	8.6	298	35.0	357	42.0	476	56.0	664	77.5
D-303424			152.00	7.6	287	38.0	344	45.6	459	60.8	612	81.1
D-303448			305.00	3.8	291	76.3	350	91.5	466	122.0	648	169.7
D-303504			25.00	103.1	644	6.3	773	7.5	1031	10.0	1361	13.2
D-303505			32.00	80.7	646	8.0	775	9.6	1033	12.8	1420	17.6
D-303506			38.00	64.6	613	9.5	736	11.4	981	15.2	1336	20.7
D-303507			44.00	53.8	592	11.0	710	13.2	947	17.6	1280	23.8
D-303508			51.00	45.8	584	12.8	701	15.3	935	20.4	1260	27.5
D-303510	32.0	16.00	64.00	35.7	571	16.0	685	19.2	914	25.6	1246	34.9
D-303512			76.00	28.6	542	19.0	651	22.8	868	30.4	1151	40.3
D-303514			89.00	24.8	551	22.3	661	26.7	881	35.6	1193	48.2
D-303516			102.00	20.6	526	25.5	631	30.6	841	40.8	1105	53.6
D-303518			114.00	18.6	534	28.5	640	34.2	854	45.6	1141	61.5
D-303520			127.00	16.7	530	31.8	636	38.1	847	50.8	1131	67.8
D-303522			140.00	14.6	506	35.0	607	42.0	810	56.0	1041	71.5
D-303524			152.00	13.6	518	38.0	621	45.6	828	60.8	1091	80.1
D-303528	32.0	16.00	178.00	11.8	524	44.5	629	53.4	839	71.2	1123	95.3
D-303532			203.00	10.6	535	50.8	642	60.9	857	81.2	1170	110.9
D-303548			305.00	6.8	515	76.3	618	91.5	824	122.0	1098	162.7
D-303606			38.00	91.8	872	9.5	1046	11.4	1395	15.2	2230	24.3
D-303607			44.00	83.2	915	11.0	1098	13.2	1464	17.6	2305	27.7
D-303608			51.00	70.6	901	12.8	1081	15.3	1441	20.4	2289	32.4
D-303610			64.00	55.1	881	16.0	1057	19.2	1410	25.6	2257	41.0
D-303612			76.00	45.7	868	19.0	1041	22.8	1388	30.4	2233	48.9
D-303614	32.0	16.00	89.00	38.6	859	22.3	1031	26.7	1374	35.6	2220	57.5
D-303616			102.00	33.7	860	25.5	1032	30.6	1376	40.8	2240	66.4
D-303618			114.00	30.0	861	28.5	1033	34.2	1378	45.6	2255	75.3
D-303620			127.00	25.8	820	31.8	984	38.1	1312	50.8	2102	81.4
D-303622			140.00	23.8	826	35.0	991	42.0	1322	56.0	2135	89.8
D-303624			152.00	21.7	825	38.0	990	45.6	1319	60.8	2135	98.4
D-303628			178.00	17.6	784	44.5	941	53.4	1255	71.2	1986	112.7
D-303632			203.00	15.6	792	50.8	950	60.9	1267	81.2	2022	129.7
D-303640	32.0	16.00	254.00	12.6	799	63.5	959	76.2	1279	101.6	2062	163.9
D-303648			305.00	9.6	732	76.3	878	91.5	1171	122.0	1801	187.7

* Loads near solid lengths for reference only; overstressed condition.

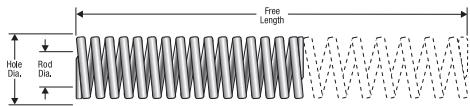

Century Spring


ISO Metric Die Springs LIGHT DUTY (GREEN)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Spring Rate N/mm	Load 25% Free Length N	Deflection 25% Free Length mm	Load 30% Free Length N	Deflection 30% Free Length mm	Load 40% Free Length N	Deflection 40% Free Length mm	Max Load N	Max Defl. mm
D-303708	40.0	20.00	51.00	104.6	1333	12.8	1600	15.3	2133	20.4	2635	25.2
D-303710			64.00	79.6	1273	16.0	1528	19.2	2037	25.6	2506	31.5
D-303712			76.00	66.6	1264	19.0	1517	22.8	2023	30.4	2522	37.9
D-303714			89.00	57.2	1272	22.3	1527	26.7	2036	35.6	2596	45.4
D-303716			102.00	48.6	1239	25.5	1487	30.6	1982	40.8	2497	51.4
D-303718			114.00	43.2	1243	28.5	1491	34.2	1989	45.6	2538	58.7
D-303720			127.00	39.2	1245	31.8	1494	38.1	1992	50.8	2560	65.3
D-303722			140.00	35.0	1215	35.0	1458	42.0	1944	56.0	2462	70.4
D-303724			152.00	31.7	1206	38.0	1447	45.6	1929	60.8	2437	76.8
D-303728			178.00	27.3	1215	44.5	1458	53.4	1944	71.2	2493	91.3
D-303732			203.00	23.5	1191	50.8	1429	60.9	1905	81.2	2412	102.8
D-303740			254.00	18.9	1198	63.5	1438	76.2	1917	101.6	2461	130.5
D-303748			305.00	15.5	1179	76.3	1415	91.5	1886	122.0	2399	155.3
D-303810	50.0	25.00	64.00	148.6	2377	16.0	2853	19.2	3804	25.6	6166	41.5
D-303812			76.00	125.2	2378	19.0	2853	22.8	3805	30.4	5782	46.2
D-303814			89.00	104.5	2324	22.3	2789	26.7	3719	35.6	5641	54.0
D-303816			102.00	90.4	2304	25.5	2765	30.6	3687	40.8	5629	62.3
D-303818			114.00	78.7	2261	28.5	2714	34.2	3618	45.6	5514	70.1
D-303820			127.00	70.4	2235	31.8	2681	38.1	3575	50.8	5447	77.4
D-303822			140.00	63.1	2192	35.0	2630	42.0	3507	56.0	5311	84.2
D-303824			152.00	56.9	2163	38.0	2595	45.6	3460	60.8	5224	91.8
D-303828			178.00	48.6	2164	44.5	2597	53.4	3462	71.2	5271	108.4
D-303832			203.00	41.8	2121	50.8	2545	60.9	3393	81.2	5132	122.8
D-303840			254.00	35.7	2264	63.5	2717	76.2	3623	101.6	5734	160.9
D-303848			305.00	26.8	2040	76.3	2448	91.5	3264	122.0	4879	182.5
D-303912	63.0	38.00	76.00	191.2	3633	19.0	4359	22.8	5812	30.4	7036	36.8
D-303914			89.00	157.5	3503	22.3	4204	26.7	5605	35.6	6786	43.1
D-303916			102.00	136.1	3471	25.5	4165	30.6	5553	40.8	6819	50.1
D-303918			114.00	118.1	3395	28.5	4074	34.2	5432	45.6	6648	56.3
D-303920			127.00	105.7	3355	31.8	4026	38.1	5368	50.8	6583	62.3
D-303924			152.00	86.3	3281	38.0	3937	45.6	5249	60.8	6441	74.6
D-303928			178.00	73.7	3278	44.5	3934	53.4	5245	71.2	6527	88.6
D-303932			203.00	63.2	3209	50.8	3851	60.9	5134	81.2	6329	100.1
D-303940			254.00	49.9	3167	63.5	3800	76.2	5067	101.6	6264	125.6
D-303948			305.00	41.0	3124	76.3	3749	91.5	4998	122.0	6158	150.4

ISO Metric Die Springs MEDIUM DUTY (BLUE)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Spring Rate N/mm	Load 25% Free Length N	Deflection 25% Free Length mm	Load 30% Free Length N	Deflection 30% Free Length mm	Load 40% Free Length N	Deflection 40% Free Length mm	Max Load N	Max Defl. mm
D-304104	10.0	5.00	25.00	15.7	98	6.3	117	7.5	157	10.0	188	12.0
D-304105			32.00	13.5	108	8.0	130	9.6	173	12.8	233	17.2
D-304106			38.00	11.7	111	9.5	133	11.4	177	15.2	246	21.1
D-304107			44.00	9.6	105	11.0	127	13.2	169	17.6	227	23.7
D-304108			51.00	8.6	110	12.8	132	15.3	176	20.4	247	28.6
D-304110			64.00	6.6	106	16.0	127	19.2	169	25.6	233	35.2
D-304112			76.00	5.5	105	19.0	126	22.8	168	30.4	230	41.7
D-304148			305.00	1.4	103	76.3	124	91.5	165	122.0	229	169.5
D-304204	12.5	7.00	25.00	29.4	184	6.3	220	7.5	294	10.0	376	12.8
D-304205			32.00	22.5	180	8.0	216	9.6	287	12.8	373	16.6
D-304206			38.00	18.7	178	9.5	213	11.4	284	15.2	372	19.9
D-304207			44.00	15.9	175	11.0	210	13.2	280	17.6	366	23.0
D-304208			51.00	13.7	175	12.8	210	15.3	280	20.4	371	27.0
D-304210			64.00	10.5	167	16.0	201	19.2	268	25.6	345	33.0
D-304212			76.00	8.7	165	19.0	198	22.8	264	30.4	338	39.0
D-304214			89.00	7.5	166	22.3	200	26.7	266	35.6	347	46.4
D-304216			102.00	6.3	161	25.5	193	30.6	257	40.8	329	52.3
D-304248			305.00	2.2	164	76.3	197	91.5	262	122.0	347	161.3
D-304304	16.0	8.50	25.00	55.7	348	6.3	418	7.5	557	10.0	646	11.6
D-304305			32.00	40.0	320	8.0	384	9.6	512	12.8	568	14.2
D-304306			38.00	34.7	329	9.5	395	11.4	527	15.2	617	17.8
D-304307			44.00	30.6	336	11.0	404	13.2	538	17.6	655	21.4
D-304308			51.00	26.6	339	12.8	406	15.3	542	20.4	672	25.3
D-304310			64.00	20.8	333	16.0	399	19.2	532	25.6	661	31.8
D-304312			76.00	17.8	339	19.0	407	22.8	542	30.4	692	38.8
D-304314			89.00	15.0	335	22.3	402	26.7	535	35.6	681	45.3
D-304316			102.00	13.3	339	25.5	406	30.6	542	40.8	701	52.8
D-304318			114.00	11.8	336	28.5	404	34.2	538	45.6	627	53.1
D-304348			305.00	4.2	319	76.3	383	91.5	511	122.0	644	153.9


* Loads near solid lengths for reference only; overstressed condition.

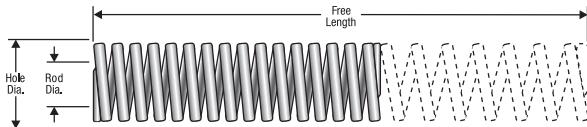

ISO Metric Die Springs MEDIUM DUTY (BLUE)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Spring Rate N/mm	Load 25% Free Length N	Deflection 25% Free Length mm	Load 30% Free Length N	Deflection 30% Free Length mm	Load 40% Free Length N	Deflection 40% Free Length mm	Max Load N	Max Defl. mm
D-304404	20.0	10.00	25.00	91.0	569	6.3	682	7.5	910	10.0	946	10.4
D-304405			32.00	67.9	543	8.0	652	9.6	869	12.8	910	13.4
D-304406			38.00	55.1	524	9.5	629	11.4	838	15.2	860	15.6
D-304407			44.00	46.7	513	11.0	616	13.2	821	17.6	840	18.0
D-304408			51.00	39.9	509	12.8	611	15.3	814	20.4	842	21.1
D-304410			64.00	30.8	493	16.0	592	19.2	790	25.6	802	26.0
D-304412			76.00	25.7	488	19.0	586	22.8	781	30.4	797	31.0
D-304414			89.00	22.1	491	22.3	590	26.7	786	35.6	817	37.0
D-304416			102.00	19.4	494	25.5	592	30.6	790	40.8	832	43.0
D-304418			115.00	17.0	488	28.8	586	34.5	781	46.0	817	48.1
D-304420			127.00	15.3	485	31.8	583	38.1	777	50.8	810	53.0
D-304422			139.00	14.1	490	34.8	588	41.7	785	55.6	832	59.0
D-304424			152.00	12.8	486	38.0	583	45.6	777	60.8	818	64.0
D-304448			305.00	6.4	489	76.3	587	91.5	782	122.0	846	132.1
D-304504	25.0	12.50	25.00	171.5	1072	6.3	1286	7.5	1715	10.0	1715	10.0
D-304505			32.00	126.5	1012	8.0	1214	9.6	1619	12.8	1619	12.8
D-304506			38.00	104.2	990	9.5	1188	11.4	1584	15.2	1605	15.4
D-304507			44.00	89.1	980	11.0	1176	13.2	1567	17.6	1639	18.4
D-304508			51.00	74.6	951	12.8	1141	15.3	1521	20.4	1573	21.1
D-304510			64.00	57.3	916	16.0	1099	19.2	1466	25.6	1489	26.0
D-304512			76.00	49.0	930	19.0	1116	22.8	1488	30.4	1571	32.1
D-304514			89.00	40.8	909	22.3	1090	26.7	1454	35.6	1515	37.1
D-304516			102.00	35.7	911	25.5	1093	30.6	1457	40.8	1540	43.1
D-304518			115.00	31.7	910	28.8	1092	34.5	1456	46.0	1551	49.0
D-304520			127.00	28.5	905	31.8	1086	38.1	1448	50.8	1539	54.0
D-304522			139.00	26.3	913	34.8	1096	41.7	1461	55.6	1579	60.1
D-304524			152.00	23.8	903	38.0	1083	45.6	1444	60.8	1544	65.0
D-304528			178.00	20.1	896	44.5	1075	53.4	1433	71.2	1530	76.0
D-304532			203.00	17.6	895	50.8	1074	60.9	1432	81.2	1536	87.1
D-304548			305.00	11.6	882	76.3	1059	91.5	1412	122.0	1504	130.1
D-304606	32.0	16.00	38.00	166.8	1585	9.5	1902	11.4	2536	15.2	2903	17.4
D-304607			44.00	136.4	1500	11.0	1800	13.2	2400	17.6	2686	19.7
D-304608			51.00	116.2	1482	12.8	1778	15.3	2371	20.4	2697	23.2
D-304610			64.00	87.5	1401	16.0	1681	19.2	2241	25.6	2486	28.4
D-304612			76.00	70.9	1347	19.0	1617	22.8	2156	30.4	2333	32.9
D-304614			89.00	60.4	1343	22.3	1611	26.7	2148	35.6	2360	39.1
D-304616			102.00	51.6	1315	25.5	1578	30.6	2104	40.8	2285	44.3
D-304618			115.00	45.8	1315	28.8	1578	34.5	2105	46.0	4964	108.5
D-304620			127.00	41.7	1324	31.8	1589	38.1	2119	50.8	2361	56.6
D-304622			139.00	37.8	1314	34.8	1577	41.7	2103	55.6	2337	61.8
D-304624			152.00	33.8	1283	38.0	1539	45.6	2053	60.8	2228	66.0
D-304628			178.00	28.9	1288	44.5	1545	53.4	2061	71.2	2269	78.4
D-304632			203.00	24.9	1263	50.8	1515	60.9	2020	81.2	2184	87.8
D-304640			254.00	20.0	1268	63.5	1522	76.2	2029	101.6	2227	111.5
D-304648			305.00	16.7	1272	76.3	1526	91.5	2035	122.0	2255	135.3
D-304708	40.0	20.00	51.00	170.3	2172	12.8	2606	15.3	3475	20.4	3577	21.0
D-304710			64.00	128.7	2059	16.0	2471	19.2	3295	25.6	3333	25.9
D-304712			76.00	107.3	2038	19.0	2445	22.8	3260	30.4	3357	31.3
D-304714			89.00	89.1	1982	22.3	2379	26.7	3172	35.6	3225	36.2
D-304716			102.00	75.5	1926	25.5	2312	30.6	3082	40.8	3067	40.6
D-304718			115.00	66.8	1921	28.8	2305	34.5	3074	46.0	3087	46.2
D-304720			127.00	61.0	1935	31.8	2323	38.1	3097	50.8	3176	52.1
D-304722			139.00	55.3	1923	34.8	2307	41.7	3076	55.6	3154	57.0
D-304724			152.00	50.8	1930	38.0	2316	45.6	3089	60.8	3211	63.2
D-304728			178.00	43.0	1914	44.5	2297	53.4	3062	71.2	3183	74.0
D-304732			203.00	37.4	1896	50.8	2275	60.9	3034	81.2	3138	84.0
D-304740			254.00	30.1	1909	63.5	2291	76.2	3054	101.6	3225	107.3
D-304748			305.00	24.8	1887	76.3	2265	91.5	3020	122.0	3168	128.1
D-304810	50.0	25.00	64.00	211.8	3389	16.0	4067	19.2	5423	25.6	5910	27.9
D-304812			76.00	166.2	3158	19.0	3789	22.8	5052	30.4	5252	31.6
D-304814			89.00	139.4	3102	22.3	3722	26.7	4963	35.6	5186	37.2
D-304816			102.00	121.4	3095	25.5	3714	30.6	4952	40.8	5268	43.4
D-304818			115.00	107.0	3075	28.8	3690	34.5	4920	46.0	5284	49.4
D-304820			127.00	94.8	3009	31.8	3610	38.1	4814	50.8	5089	53.7
D-304822			139.00	86.4	3003	34.8	3604	41.7	4806	55.6	5117	59.2
D-304824			152.00	78.3	2975	38.0	3570	45.6	4759	60.8	5049	64.5
D-304828			178.00	65.9	2931	44.5	3517	53.4	4690	71.2	4953	75.2
D-304832			203.00	57.2	2901	50.8	3481	60.9	4641	81.2	4881	85.4
D-304836			229.00	50.8	2911	57.3	3493	68.7	4657	91.6	4962	97.6
D-304840			254.00	46.0	2919	63.5	3503	76.2	4671	101.6	5025	109.3
D-304848			305.00	37.9	2891	76.3	3469	91.5	4625	122.0	4959	130.9

* Loads near solid lengths for reference only; overstressed condition.

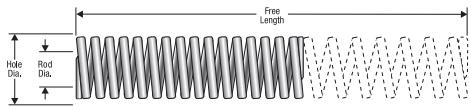

Century Spring


ISO Metric Die Springs MEDIUM DUTY (BLUE)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Spring Rate N/mm	Load 25% Free Length N	Deflection 25% Free Length mm	Load 30% Free Length N	Deflection 30% Free Length mm	Load 40% Free Length N	Deflection 40% Free Length mm	Max Load N	Max Defl. mm
D-304912	63.0	38.00	76.00	303.5	5767	19.0	6920	22.8	9227	30.4	10198	33.6
D-304914			89.00	247.4	5506	22.3	6607	26.7	8809	35.6	9650	39.0
D-304916			102.00	210.8	5375	25.5	6450	30.6	8600	40.8	9464	44.9
D-304918			115.00	183.6	5278	28.8	6334	34.5	8445	46.0	9326	50.8
D-304920			127.00	162.6	5163	31.8	6195	38.1	8260	50.8	9041	55.6
D-304924			152.00	132.4	5029	38.0	6035	45.6	8047	60.8	8788	66.4
D-304928			178.00	111.1	4942	44.5	5930	53.4	7907	71.2	8629	77.7
D-304932			203.00	96.9	4916	50.8	5899	60.9	7866	81.2	8660	89.4
D-304936			229.00	85.9	4918	57.3	5901	68.7	7868	91.6	8762	102.0
D-304940			254.00	77.4	4917	63.5	5900	76.2	7867	101.6	8835	114.1
D-304948			305.00	64.1	4890	76.3	5868	91.5	7824	122.0	8850	138.1

ISO Metric Die Springs HEAVY DUTY (RED)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Spring Rate N/mm	Load 20% Free Length N	Deflection 20% Free Length mm	Load 25% Free Length N	Deflection 25% Free Length mm	Load 30% Free Length N	Deflection 30% Free Length mm	Max Load N	Max Defl. mm
D-305104	10.0	5.00	25.00	23.4	117	5.0	146	6.3	175	7.5	222	9.5
D-305105			32.00	18.0	115	6.4	144	8.0	172	9.6	221	12.3
D-305106			38.00	16.6	126	7.6	158	9.5	189	11.4	279	16.8
D-305107			44.00	14.5	127	8.8	159	11.0	191	13.2	288	19.9
D-305108			51.00	12.0	122	10.2	153	12.8	183	15.3	266	22.2
D-305110			64.00	9.9	126	12.8	158	16.0	189	19.2	290	29.4
D-305112			76.00	7.9	120	15.2	150	19.0	179	22.8	260	33.1
D-305148			305.00	1.9	118	61.0	147	76.3	177	91.5	260	134.6
D-305204			25.00	42.4	212	5.0	265	6.3	318	7.5	475	11.2
D-305205			32.00	31.8	203	6.4	254	8.0	305	9.6	455	14.3
D-305206	12.5	7.00	38.00	27.1	206	7.6	257	9.5	308	11.4	476	17.6
D-305207			44.00	23.8	209	8.8	261	11.0	314	13.2	499	21.0
D-305208			51.00	19.9	203	10.2	254	12.8	305	15.3	479	24.0
D-305210			64.00	15.2	194	12.8	243	16.0	291	19.2	443	29.2
D-305212			76.00	13.5	204	15.2	256	19.0	307	22.8	498	37.0
D-305214			89.00	11.1	197	17.8	246	22.3	295	26.7	465	42.0
D-305216			102.00	8.4	171	20.4	214	25.5	257	30.6	368	43.8
D-305248			305.00	3.2	192	61.0	240	76.3	288	91.5	458	145.5
D-305304			25.00	78.0	390	5.0	487	6.3	585	7.5	741	9.5
D-305305			32.00	61.0	390	6.4	488	8.0	586	9.6	787	12.9
D-305306	16.0	8.50	38.00	50.7	385	7.6	482	9.5	578	11.4	786	15.5
D-305307			44.00	45.5	400	8.8	501	11.0	601	13.2	874	19.2
D-305308			51.00	36.9	377	10.2	471	12.8	565	15.3	779	21.1
D-305310			64.00	29.4	377	12.8	471	16.0	565	19.2	798	27.1
D-305312			76.00	25.7	390	15.2	488	19.0	585	22.8	875	34.1
D-305314			89.00	21.8	388	17.8	485	22.3	582	26.7	875	40.1
D-305316			102.00	18.9	386	20.4	482	25.5	579	30.6	870	46.0
D-305318			114.00	15.7	358	22.8	447	28.5	537	34.2	691	44.0
D-305348			305.00	6.2	375	61.0	469	76.3	563	91.5	849	138.1
D-305404			25.00	219.2	1096	5.0	1370	6.3	1644	7.5	1731	7.9
D-305405	20.0	10.00	32.00	171.3	1097	6.4	1371	8.0	1645	9.6	1885	11.0
D-305406			38.00	136.6	1038	7.6	1298	9.5	1557	11.4	1721	12.6
D-305407			44.00	116.3	1024	8.8	1280	11.0	1536	13.2	1710	14.7
D-305408			51.00	96.7	986	10.2	1232	12.8	1479	15.3	1585	16.4
D-305410			64.00	74.2	950	12.8	1187	16.0	1425	19.2	1484	20.0
D-305412			76.00	62.8	955	15.2	1194	19.0	1433	22.8	1546	24.6
D-305414			89.00	53.9	959	17.8	1198	22.3	1438	26.7	1594	29.6
D-305416			102.00	46.5	949	20.4	1187	25.5	1424	30.6	1573	33.8
D-305418			114.00	41.9	963	22.8	1204	28.5	1445	34.2	1658	39.6
D-305420			127.00	37.3	948	25.4	1185	31.8	1422	38.1	1597	42.8
D-305422	25.0	12.50	140.00	33.9	942	28.0	1177	35.0	1413	42.0	1558	46.0
D-305424			152.00	30.9	939	30.4	1174	38.0	1409	45.6	1576	51.0
D-305426			305.00	15.2	927	61.0	1159	76.3	1391	91.5	1569	103.2
D-305504			25.00	371.4	1857	5.0	2321	6.3	2785	7.5	2823	7.6
D-305505			32.00	280.7	1796	6.4	2246	8.0	2695	9.6	2891	10.3
D-305506			38.00	219.5	1668	7.6	2085	9.5	2502	11.4	2502	11.4
D-305507	25.0	12.50	44.00	201.3	1771	8.8	2214	11.0	2657	13.2	3100	15.4
D-305508			51.00	163.1	1664	10.2	2080	12.8	2495	15.3	2724	16.7
D-305510			64.00	127.1	1626	12.8	2033	16.0	2440	19.2	2681	21.1
D-305512			76.00	107.3	1631	15.2	2039	19.0	2446	22.8	2790	26.0
D-305514			89.00	90.1	1603	17.8	2004	22.3	2405	26.7	2720	30.2
D-305516			102.00	78.4	1599	20.4	1998	25.5	2398	30.6	2751	35.1
D-305518			114.00	70.6	1624	22.8	2029	28.5	2435	34.2	2908	41.2
D-305520			127.00	63.2	1605	25.4	2007	31.8	2408	38.1	2844	45.0
D-305522			140.00	57.5	1598	28.0	1997	35.0	2397	42.0	2834	49.3

* Loads near solid lengths for reference only; overstressed condition.

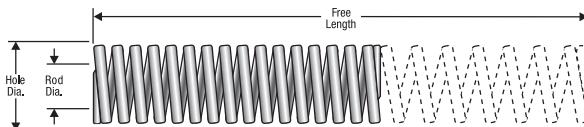

ISO Metric Die Springs HEAVY DUTY (RED)


Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Spring Rate N/mm	Load 20% Free Length N	Deflection 20% Free Length mm	Load 25% Free Length N	Deflection 25% Free Length mm	Load 30% Free Length N	Deflection 30% Free Length mm	Max Load N	Max Defl. mm
D-305524	25.0	12.50	152.00	53.1	1613	30.4	2016	38.0	2420	45.6	2929	55.2
D-305528			178.00	45.2	1609	35.6	2012	44.5	2414	53.4	2943	65.1
D-305532			203.00	39.5	1602	40.6	2002	50.8	2403	60.9	2927	74.2
D-305548			305.00	26.8	1632	61.0	2040	76.3	2449	91.5	3136	117.2
D-305606	32.0	16.00	38.00	387.2	2943	7.6	3678	9.5	4414	11.4	4879	12.6
D-305607			44.00	313.0	2754	8.8	3443	11.0	4131	13.2	4351	13.9
D-305608			51.00	267.5	2728	10.2	3410	12.8	4092	15.3	4467	16.7
D-305610			64.00	204.3	2615	12.8	3269	16.0	3923	19.2	4250	20.8
D-305612			76.00	171.7	2609	15.2	3261	19.0	3914	22.8	4360	25.4
D-305614			89.00	141.5	2518	17.8	3147	22.3	3777	26.7	4102	29.0
D-305616			102.00	123.6	2522	20.4	3152	25.5	3783	30.6	4215	34.1
D-305618			114.00	109.8	2525	22.8	3156	28.5	3787	34.2	4303	39.2
D-305620			127.00	98.7	2508	25.4	3135	31.8	3762	38.1	4285	43.4
D-305622			140.00	89.2	2478	28.0	3098	35.0	3718	42.0	4190	47.0
D-305624			152.00	81.7	2484	30.4	3105	38.0	3726	45.6	4258	52.1
D-305628	30.00	14.00	178.00	69.2	2465	35.6	3081	44.5	3697	53.4	4223	61.0
D-305632			203.00	60.7	2463	40.6	3078	50.8	3694	60.9	4264	70.3
D-305640			254.00	48.4	2458	50.8	3073	63.5	3687	76.2	4307	89.0
D-305648			305.00	40.2	2452	61.0	3064	76.3	3677	91.5	4316	107.4
D-305708	40.00	20.00	51.00	371.7	3791	10.2	4739	12.8	5686	15.3	6244	16.8
D-305710			64.00	300.1	3841	12.8	4801	16.0	5761	19.2	6961	23.2
D-305712			76.00	233.6	3551	15.2	4439	19.0	5326	22.8	5934	25.4
D-305714			89.00	197.0	3507	17.8	4384	22.3	5260	26.7	5970	30.3
D-305716			102.00	170.3	3475	20.4	4344	25.5	5212	30.6	5979	35.1
D-305718			114.00	155.7	3582	22.8	4478	28.5	5373	34.2	6603	42.4
D-305720	50.00	25.00	127.00	137.4	3490	25.4	4363	31.8	5236	38.1	6266	45.6
D-305722			140.00	123.4	3431	28.0	4289	35.0	5147	42.0	6060	49.1
D-305724			152.00	114.4	3477	30.4	4346	38.0	5215	45.6	6347	55.5
D-305728			178.00	96.8	3445	35.6	4306	44.5	5167	53.4	6299	65.1
D-305732			203.00	84.7	3440	40.6	4300	50.8	5160	60.9	6355	75.0
D-305740			254.00	67.6	3433	50.8	4291	63.5	5149	76.2	6426	95.1
D-305748			305.00	56.2	3428	61.0	4285	76.3	5142	91.5	6474	115.2
D-305810	63.00	38.00	64.00	424.3	5431	12.8	6788	16.0	8146	19.2	9800	23.1
D-305812			76.00	335.1	5094	15.2	6367	19.0	7640	22.8	8813	26.3
D-305814			89.00	276.8	4927	17.8	6159	22.3	7391	26.7	8415	30.4
D-305816			102.00	244.9	4996	20.4	6244	25.5	7493	30.6	8987	36.7
D-305818			114.00	214.6	4936	22.8	6170	28.5	7404	34.2	8928	41.6
D-305820			127.00	189.1	4804	25.4	6005	31.8	7205	38.1	8454	44.7
D-305822			140.00	169.0	4699	28.0	5874	35.0	7049	42.0	8080	47.8
D-305824			152.00	154.0	4683	30.4	5854	38.0	7024	45.6	8118	52.7
D-305828	75.00	38.00	178.00	130.8	4658	35.6	5822	44.5	6986	53.4	8164	62.4
D-305832			203.00	115.1	4671	40.6	5839	50.8	7007	60.9	8353	72.6
D-305840			254.00	90.5	4598	50.8	5748	63.5	6898	76.2	8174	90.3
D-305848			305.00	75.5	4606	61.0	5757	76.3	6908	91.5	8320	110.2
D-305912	63.00	38.00	76.00	618.0	9394	15.2	11741	19.0			13410	21.7
D-305914			89.00	515.0	9167	17.8	11458	22.3			13492	26.2
D-305916			102.00	438.0	8935	20.4	11168	25.5			13139	30.0
D-305918			114.00	370.0	8436	22.8	10544	28.5			11469	31.0
D-305920			127.00	333.0	8458	25.4	10572	31.8			12220	36.7
D-305924			152.00	269.0	8178	30.4	10221	38.0			11674	43.4
D-305928			178.00	226.0	8046	35.6	10057	44.5			11276	49.9
D-305932			203.00	198.0	8039	40.6	10049	50.8			11800	59.6
D-305936			229.00	143.6	6577	45.8	8221	57.3			12306	85.7
D-305940			254.00	155.0	7874	50.8	9843	63.5			11810	76.2
D-305948			305.00	128.0	7808	61.0	9760	76.3			11711	91.5

ISO Metric Die Springs EXTRA HEAVY DUTY (YELLOW)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Spring Rate N/mm	Load 17% Free Length N	Deflection 17% Free Length mm	Load 20% Free Length N	Deflection 20% Free Length mm	Load 25% Free Length N	Deflection 25% Free Length mm	Max Load N	Max Defl. mm
D-306104	10.0	5.00	25.00	36.4	155	4.3	182	5.0	228	6.3	270	7.4
D-306105			32.00	27.5	149	5.4	176	6.4	220	8.0	256	9.3
D-306106			38.00	23.3	150	6.5	177	7.6	221	9.5	267	11.5
D-306107			44.00	19.6	147	7.5	173	8.8	216	11.0	255	13.0
D-306108	12.5	7.00	51.00	16.8	146	8.7	171	10.2	214	12.8	254	15.1
D-306110			64.00	13.3	145	10.9	170	12.8	213	16.0	255	19.2
D-306112			76.00	11.2	144	12.9	169	15.2	212	19.0	256	23.0
D-306148			305.00	2.7	141	51.9	166	61.0	207	76.3	256	94.3
D-306204	12.5	7.00	25.00	54.7	233	4.3	274	5.0	342	6.3	487	8.9
D-306205			32.00	42.4	230	5.4	271	6.4	339	8.0	540	12.8
D-306206			38.00	34.6	223	6.5	263	7.6	328	9.5	480	13.9
D-306207			44.00	27.8	208	7.5	245	8.8	306	11.0	459	16.5

* Loads near solid lengths for reference only; overstressed condition.

Can't find what you're looking for? Request a custom quote. Email customquote@centuryspring.com

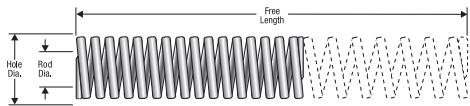


Century Spring

ISO Metric Die Springs EXTRA HEAVY DUTY (YELLOW)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Spring Rate N/mm	Load 17% Free Length N	Deflection 17% Free Length mm	Load 20% Free Length N	Deflection 20% Free Length mm	Load 25% Free Length N	Deflection 25% Free Length mm	Max Load N	Max Defl. mm
D-306208	12.5	7.00	51.00	25.3	219	8.7	258	10.2	322	12.8	477	18.9
D-306210			64.00	19.9	217	10.9	255	12.8	318	16.0	476	23.9
D-306212			76.00	16.6	215	12.9	253	15.2	316	19.0	474	28.5
D-306214			89.00	14.0	211	15.1	249	17.8	311	22.3	461	33.0
D-306216			102.00	12.7	220	17.3	259	20.4	324	25.5	457	36.0
D-306248			305.00	3.8	199	51.9	234	61.0	293	76.3	413	107.6
D-306304	16.0	8.50	25.00	136.2	579	4.3	681	5.0	851	6.3	1076	7.9
D-306305			32.00	99.1	539	5.4	634	6.4	792	8.0	961	9.7
D-306306			38.00	82.8	535	6.5	629	7.6	786	9.5	985	11.9
D-306307			44.00	70.7	529	7.5	622	8.8	777	11.0	982	13.9
D-306308			51.00	60.5	525	8.7	617	10.2	772	12.8	993	16.4
D-306310			64.00	48.1	523	10.9	615	12.8	769	16.0	1019	21.2
D-306312	20.0	10.00	76.00	39.9	515	12.9	606	15.2	757	19.0	997	25.0
D-306314			89.00	34.2	518	15.1	609	17.8	762	22.3	1034	30.2
D-306316			102.00	29.5	511	17.3	601	20.4	751	25.5	1004	34.1
D-306318			114.00	26.4	512	19.4	602	22.8	752	28.5	1175	44.5
D-306348			305.00	9.8	508	51.9	597	61.0	746	76.3	1041	106.3
D-306404			25.00	326.5	1345	4.3	1583	5.0	1978	6.3	1992	6.1
D-306405	25.0	12.50	32.00	244.9	1291	5.4	1518	6.4	1898	8.0	2008	8.2
D-306406			38.00	199.2	1247	6.5	1467	7.6	1834	9.5	1932	9.7
D-306407			44.00	170.3	1202	7.5	1415	8.8	1768	11.0	1975	11.6
D-306408			51.00	146.9	1202	8.7	1414	10.2	1768	12.8	2071	14.1
D-306410			64.00	114.7	1177	10.9	1385	12.8	1731	16.0	2052	17.9
D-306412			76.00	94.0	1147	12.9	1349	15.2	1686	19.0	1956	20.8
D-306414	32.0	16.00	89.00	78.4	1119	15.1	1316	17.8	1645	22.3	1850	23.6
D-306416			102.00	68.1	1115	17.3	1312	20.4	1640	25.5	1867	27.4
D-306418			115.00	60.3	1112	19.6	1308	23.0	1635	28.8	1820	30.2
D-306420			127.00	54.0	1101	21.6	1295	25.4	1619	31.8	1837	34.0
D-306422			139.00	48.5	1081	23.6	1272	27.8	1589	34.8	1785	36.8
D-306424			152.00	44.4	1082	25.8	1273	30.4	1591	38.0	1758	39.6
D-306448	38.0	20.00	305.00	22.0	1075	51.9	1265	61.0	1581	76.3	1815	82.5
D-306504			25.00	459.0	1951	4.3	2295	5.0	2869	6.3	3351	7.3
D-306505			32.00	348.2	1894	5.4	2229	6.4	2786	8.0	3413	9.8
D-306506			38.00	277.2	1790	6.5	2106	7.6	2633	9.5	3132	11.3
D-306507			44.00	236.2	1767	7.5	2078	8.8	2598	11.0	3189	13.5
D-306508			51.00	196.8	1706	8.7	2008	10.2	2509	12.8	3011	15.3
D-306510	44.0	12.50	64.00	155.2	1689	10.9	1987	12.8	2483	16.0	3104	20.0
D-306512			76.00	129.3	1671	12.9	1966	15.2	2457	19.0	3117	24.1
D-306514			89.00	108.7	1644	15.1	1934	17.8	2417	22.3	3053	28.1
D-306516			102.00	95.3	1653	17.3	1944	20.4	2430	25.5	3164	33.2
D-306518			115.00	84.9	1659	19.6	1952	23.0	2440	28.8	3251	38.3
D-306520			127.00	76.3	1647	21.6	1938	25.4	2423	31.8	3220	42.2
D-306522	44.0	20.00	139.00	69.3	1637	23.6	1926	27.8	2408	34.8	3194	46.1
D-306524			152.00	63.5	1640	25.8	1929	30.4	2411	38.0	3236	51.0
D-306528			178.00	54.5	1650	30.3	1942	35.6	2427	44.5	3343	61.3
D-306532			203.00	47.7	1644	34.5	1935	40.6	2418	50.8	3340	70.1
D-306548			305.00	31.5	1634	51.9	1922	61.0	2403	76.3	3353	106.4
D-306606	44.0	20.00	38.00	478.3	3090	6.5	3635	7.6	4544	9.5	4975	10.4
D-306607			44.00	420.0	3142	7.5	3696	8.8	4620	11.0	5334	12.7
D-306608			51.00	351.4	3047	8.7	3584	10.2	4481	12.8	5236	14.9
D-306610			64.00	273.3	2974	10.9	3499	12.8	4373	16.0	5275	19.3
D-306612			76.00	226.6	2927	12.9	3444	15.2	4305	19.0	5302	23.4
D-306614			89.00	193.5	2927	15.1	3444	17.8	4305	22.3	5514	28.5
D-306616	44.0	20.00	102.00	162.5	2817	17.3	3314	20.4	4142	25.5	5052	31.1
D-306618			115.00	144.7	2829	19.6	3328	23.0	4160	28.8	5238	36.2
D-306620			127.00	132.5	2860	21.6	3364	25.4	4206	31.8	5484	41.4
D-306622			139.00	118.8	2806	23.6	3302	27.8	4127	34.8	5261	44.3
D-306624			152.00	109.0	2816	25.8	3313	30.4	4142	38.0	5384	49.4
D-306628			178.00	91.8	2779	30.3	3270	35.6	4087	44.5	5272	57.4
D-306632	44.0	20.00	203.00	80.5	2777	34.5	3267	40.6	4084	50.8	5327	66.2
D-306640			254.00	64.3	2774	43.2	3264	50.8	4080	63.5	5416	84.3
D-306648			305.00	53.4	2768	51.9	3257	61.0	4071	76.3	5446	102.0
D-306708	44.0	20.00	51.00	588.7	5104	8.7	6004	10.2	7505	12.8	8594	14.6
D-306710			64.00	452.8	4927	10.9	5796	12.8	7245	16.0	8286	18.3
D-306712			76.00	373.8	4829	12.9	5681	15.2	7101	19.0	8297	22.2
D-306714			89.00	314.0	4750	15.1	5588	17.8	6985	22.3	8288	26.4
D-306716			102.00	273.8	4748	17.3	5585	20.4	6982	25.5	8570	31.3
D-306718			115.00	242.8	4746	19.6	5583	23.0	6979	28.8	8788	36.2
D-306720	44.0	20.00	127.00	218.0	4707	21.6	5538	25.4	6922	31.8	8743	40.1
D-306722			139.00	196.2	4637	23.6	5455	27.8	6819	34.8	8496	43.3
D-306724			152.00	179.7	4644	25.8	5464	30.4	6830	38.0	8663	48.2
D-306728			178.00	151.9	4597	30.3	5408	35.6	6760	44.5	8598	56.6
D-306732			203.00	132.7	4578	34.5	5386	40.6	6732	50.8	8623	65.0
D-306740			254.00	105.6	4559	43.2	5364	50.8	6705	63.5	8722	82.6
D-306748	44.0	20.00	305.00	87.9	4556	51.9	5359	61.0	6699	76.3	8830	100.5

* Loads near solid lengths for reference only; overstressed condition.

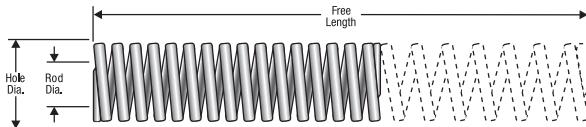


ISO Metric Die Springs EXTRA HEAVY DUTY (YELLOW)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Spring Rate N/mm	Load 17% Free Length N	Deflection 17% Free Length mm	Load 20% Free Length N	Deflection 20% Free Length mm	Load 25% Free Length N	Deflection 25% Free Length mm	Max Load N	Max Defl. mm
D-306810			64.00	671.4	7305	10.9	8594	12.8	10741	16.0	14434	21.5
D-306812			76.00	537.1	6940	12.9	8164	15.2	10204	19.0	13427	25.0
D-306814			89.00	451.2	6826	15.1	8031	17.8	10039	22.3	13444	29.8
D-306816			102.00	389.0	6744	17.3	7935	20.4	9918	25.5	13496	34.7
D-306818			115.00	341.8	6682	19.6	7861	23.0	9827	28.8	13534	39.6
D-306820			127.00	304.9	6582	21.6	7743	25.4	9679	31.8	13229	43.4
D-306822	50.0	25.00	139.00	275.1	6501	23.6	7648	27.8	9560	34.8	13012	47.3
D-306824			152.00	250.7	6477	25.8	7620	30.4	9525	38.0	13058	52.1
D-306828			178.00	208.9	6321	30.3	7436	35.6	9295	44.5	12490	59.8
D-306832			203.00	184.9	6381	34.5	7507	40.6	9384	50.8	13054	70.6
D-306840			254.00	146.5	6325	43.2	7442	50.8	9302	63.5	13037	89.0
D-306848			305.00	120.0	6221	51.9	7319	61.0	9149	76.3	12646	105.4
D-306912			76.00	952.0	12299	12.9	14469	15.2			16373	17.2
D-306914			89.00	819.0	12390	15.1	14577	17.8			17264	21.1
D-306916			102.00	700.0	12137	17.3	14279	20.4			16862	24.1
D-306918			114.00	620.0	12015	19.4	14135	22.8			16906	27.3
D-306920			127.00	565.0	12197	21.6	14350	25.4			18599	32.9
D-306924	63.0	38.00	152.00	458.0	11834	25.8	13922	30.4			17101	37.4
D-306928			178.00	384.0	11619	30.3	13669	35.6			16135	42.0
D-306932			203.00	337.0	11629	34.5	13681	40.6			16394	48.7
D-306940			254.00	263.0	11355	43.2	13359	50.8			15574	59.2
D-306948			305.00	218.0	11302	51.9	13297	61.0			15536	71.3

ISO Metric Die Springs ULTRA STRONG DUTY (GRAY)

Century Stock Number	Hole Size mm	Rod Size mm	Free Length mm	Spring Rate N/mm	Load 10% Free Length N	Deflection 10% Free Length mm	Load 13.5% Free Length N	Deflection 13.5% Free Length mm	Load 15% Free Length N	Deflection 15% Free Length mm	Max Load N	Max Defl. mm
D-307510			64.00	644.0	4122	6.4	5564	8.6	6182	9.6	8372	13.0
D-307512			76.00	556.0	4226	7.6	5705	10.3	6338	11.4	8896	16.0
D-307514			89.00	462.0	4112	8.9	5551	12.0	6168	13.4	9240	20.0
D-307516			102.00	390.0	3978	10.2	5370	13.8	5967	15.3	8970	23.0
D-307518			115.00	360.0	4140	11.5	5589	15.5	6210	17.3	9360	26.0
D-307520	25.0	12.50	127.00	326.0	4140	12.7	5589	17.1	6210	19.1	9128	28.0
D-307524			152.00	255.0	3876	15.2	5233	20.5	5814	22.8	8670	34.0
D-307528			178.00	230.0	4094	17.8	5527	24.0	6141	26.7	8970	39.0
D-307532			203.00	202.0	4101	20.3	5536	27.4	6151	30.5	9090	45.0
D-307548			305.00	136.0	4148	30.5	5600	41.2	6222	45.8	8568	63.0
D-307610			64.00	1077.0	6893	6.4	9305	8.6	10338	9.6	14000	13.0
D-307612			76.00	874.0	6642	7.6	8967	10.3	9964	11.4	13983	16.0
D-307614			89.00	721.0	6417	8.9	8663	12.0	9625	13.4	14419	20.0
D-307616			102.00	620.0	6324	10.2	8537	13.8	9486	15.3	14259	23.0
D-307618			115.00	560.0	6440	11.5	8694	15.5	9660	17.3	14559	26.0
D-307620	32.0	16.00	127.00	496.0	6299	12.7	8504	17.1	9449	19.1	13887	28.0
D-307624			152.00	408.0	6202	15.2	8372	20.5	9302	22.8	13871	34.0
D-307628			178.00	353.0	6283	17.8	8483	24.0	9425	26.7	13766	39.0
D-307632			203.00	304.0	6171	20.3	8331	27.4	9257	30.5	13679	45.0
D-307640			254.00	243.0	6172	25.4	8332	34.3	9258	38.1	15065	62.0
D-307648			305.00	196.0	5978	30.5	8070	41.2	8967	45.8	14699	75.0
D-307714			89.00	880.0	7832	8.9	10572	12.0	11747	13.4	17599	20.0
D-307716			102.00	762.0	7772	10.2	10492	13.8	11658	15.3	17525	23.0
D-307718			115.00	679.0	7809	11.5	10540	15.5	11712	17.3	17653	26.0
D-307720			127.00	622.0	7899	12.7	10663	17.1	11848	19.1	17415	28.0
D-307724	40.0	20.00	152.00	509.0	7737	15.2	10444	20.5	11604	22.8	18323	36.0
D-307728			178.00	429.0	7636	17.8	10308	24.0	11453	26.7	18446	43.0
D-307732			203.00	374.0	7592	20.3	10248	27.4	11387	30.5	18325	49.0
D-307740			254.00	296.0	7518	25.4	10149	34.3	11277	38.1	18351	62.0
D-307748			305.00	246.0	7503	30.5	10128	41.2	11254	45.8	18449	75.0
D-307814			89.00	1410.0	12548	8.9	16940	12.0	18823	13.4	26789	19.0
D-307816			102.00	1215.0	12392	10.2	16730	13.8	18589	15.3	26729	22.0
D-307818			115.00	1076.0	12373	11.5	16704	15.5	18560	17.3	26899	25.0
D-307820			127.00	968.0	12293	12.7	16595	17.1	18439	19.1	27103	28.0
D-307824	50.0	25.00	152.00	806.0	12250	15.2	16538	20.5	18376	22.8	27403	34.0
D-307828			178.00	698.0	12423	17.8	16772	24.0	18636	26.7	27919	40.0
D-307832			203.00	612.0	12423	20.3	16771	27.4	18634	30.5	27539	45.0
D-307840			254.00	472.0	11988	25.4	16184	34.3	17982	38.1	27375	58.0
D-307848			305.00	388.0	11833	30.5	15975	41.2	17750	45.8	27159	70.0

* Loads near solid lengths for reference only; overstressed condition.

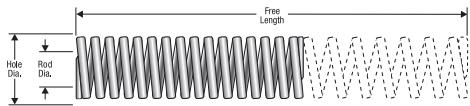


Round Wire Die Springs LIGHT DUTY (GREEN)

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Diameter Inches	Free Length Inches	Load @ 1/10 In. Defl Lbs.	Max. Load. Lbs.	Max. Defl. Inches
D-93104	0.375	0.188	0.042	1.000	2.52	10.080	0.400
D-93105				1.250	4.96	9.800	0.500
D-93106				1.500	1.59	9.540	0.600
D-93107				1.750	1.35	9.450	0.700
D-93108				2.000	1.19	9.520	0.800
D-93110				2.500	0.93	9.300	1.000
D-93112				3.000	0.76	9.120	1.200
D-93148				12.000	0.18	8.640	4.800
D-93204	0.500	0.281	0.056	1.000	4.88	19.520	0.400
D-93205				1.250	3.71	18.550	0.500
D-93206				1.500	3.04	18.240	0.600
D-93207				1.750	2.64	18.480	0.700
D-93208				2.000	2.17	17.360	0.800
D-93210				2.500	1.68	16.800	1.000
D-93212				3.000	1.43	17.160	1.200
D-93214				3.500	1.22	17.080	1.400
D-93248	0.625	0.344	0.073	12.000	0.34	16.320	4.800
D-93304				1.000	10.2	40.800	0.400
D-93305				1.250	7.7	38.500	0.500
D-93306				1.500	6	36.000	0.600
D-93307				1.750	5	35.000	0.700
D-93308				2.000	4.33	34.640	0.800
D-93310				2.500	3.38	33.800	1.000
D-93312				3.000	2.73	32.760	1.200
D-93314	0.625	0.344	0.073	3.500	2.31	32.340	1.400
D-93316				4.000	2.01	32.160	1.600
D-93348				12.000	0.64	30.720	4.800

Round Wire Die Springs MEDIUM DUTY (BLUE)

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Diameter Inches	Free Length Inches	Load @ 1/10 In. Defl Lbs.	Max. Load. Lbs.	Max. Defl. Inches
D-94104	0.375	0.188	0.054	1.000	7.00	25.900	0.370
D-94105				1.250	5.43	24.980	0.460
D-94106				1.500	4.39	24.590	0.560
D-94107				1.750	3.72	24.150	0.650
D-94108				2.000	3.22	23.830	0.740
D-94110				2.500	2.54	23.590	0.930
D-94112				3.000	2.10	23.310	1.110
D-94148				12.000	0.51	22.640	4.440
D-94204	0.500	0.281	0.073	1.000	12.40	45.880	0.370
D-94205				1.250	9.65	44.400	0.460
D-94206				1.500	7.83	43.850	0.560
D-94207				1.750	6.58	42.740	0.650
D-94208				2.000	5.70	42.180	0.740
D-94210				2.500	4.44	41.260	0.930
D-94212				3.000	3.66	40.630	1.110
D-94214				3.500	3.20	41.570	1.300
D-94248	0.625	0.344	0.088	12.000	0.88	39.070	4.440
D-94304				1.000	18.20	67.340	0.370
D-94305				1.250	13.77	63.360	0.460
D-94306				1.500	11.00	61.610	0.560
D-94307				1.750	9.16	59.570	0.650
D-94308				2.000	7.90	58.460	0.740
D-94310				2.500	6.07	56.430	0.930
D-94312				3.000	5.00	55.500	1.110
D-94314	0.625	0.344	0.088	3.500	4.24	55.170	1.300
D-94316				4.000	3.73	55.200	1.480
D-94348				12.000	1.19	52.840	4.440

* Loads near solid lengths for reference only; overstressed condition.

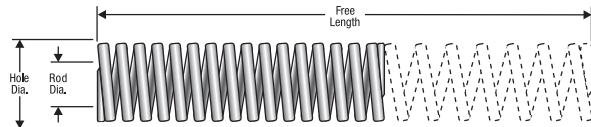

Round Wire Die Springs HEAVY DUTY (RED)

Century Stock Number	Hole Size Inches	Rod Size Inches	Wire Diameter Inches	Free Length Inches	Load @ 1/10 In. Defl Lbs.	Max. Load. Lbs.	Max. Defl. Inches
D-95104				1.000	11.80	35.400	0.300
D-95105				1.250	9.08	34.500	0.380
D-95106				1.500	7.40	33.300	0.450
D-95107	0.375	0.188	0.062	1.750	6.14	32.550	0.530
D-95108				2.000	5.50	33.000	0.600
D-95110				2.500	4.38	32.850	0.750
D-95112				3.000	3.59	32.310	0.900
D-95148				12.000	0.78	31.320	3.600
D-95204				1.000	21.40	64.200	0.300
D-95205				1.250	16.28	61.880	0.380
D-95206	0.500	0.281	0.084	1.500	13.40	60.300	0.450
D-95207				1.750	11.09	58.800	0.530
D-95208				2.000	9.90	59.400	0.600
D-95210				2.500	7.70	57.750	0.750
D-95212				3.000	6.40	57.600	0.900
D-95214				3.500	5.40	56.700	1.050
D-95248				12.000	1.52	54.720	3.600
D-95304				1.000	46.60	139.800	0.300
D-95305				1.250	34.54	131.250	0.380
D-95306				1.500	28.50	128.250	0.450
D-95307	0.625	0.344	0.109	1.750	23.08	122.330	0.530
D-95308				2.000	20.30	121.800	0.600
D-95310				2.500	15.90	119.250	0.750
D-95312				3.000	13.00	117.000	0.900
D-95314				3.500	11.20	117.600	1.050
D-95316				4.000	9.70	116.400	1.200
D-95348				12.000	3.09	111.240	3.600

* Loads near solid lengths for reference only; overstressed condition.

Disc Springs

Disc Springs, sometimes called Belleville washers after the inventor, are cone-shaped discs which elastically deform to a shorter height when subjected to a load along the axis of symmetry. This elastic deformation characterizes the spring action.

Our disc spring fabrication is subject to exacting manufacturing and quality control standards. Materials used are generally in annealed condition and hardened to within a range of Rc 44-51 depending on material thickness. All discs are preset so that they will not significantly relax under load over time.

Disc springs are used singly or in stacks to achieve a desired load and travel. In general, they function best under conditions requiring very high load in confined space or short travel. Under these constraints, it is often not practical or even possible to use a coil spring.

The figure of "Load Deflection Characteristics of Disc Springs" below is offered as an aid in selecting the spring for your application.

As a means of increasing the deflection or the load, disc springs can be used in series or parallel, or in a combination of series and parallel (see the figures that follow). Deflection for a stack in series of identical discs is equal to the number of discs multiplied by the deflection of one, while the load is equal to the load carried by one disc. When the discs with an h/t ratio greater than 1.3 are used in a stack, the load-deflection curve will be erratic as some discs will invert through the flat position.


Century Spring also offers pre-stressed disc springs specifically sized for use with bolts (see part numbers beginning with "CDS"). The primary function of the disc in this application is to create a constant bolt load in bolted assemblies. Load compensation for differential expansion due to heat or dissimilar metals such as electrical connection bolting, or in wear situations, or when "torque-setting" is required are good examples of disc spring use.

Selecting a Disc Spring



Parallel Stack

If you stack 6 discs in parallel, you gain 6 times the load of a single disc, but your maximum deflection distance is of a single disc (ie. stack size P/N CDM-63203 and achieve a total load of 222 lbs., an O.H. of .078", but a deflection of .006").




Series Stack

If you stack 5 discs in a series, you achieve 5 times the deflection of one disc, but the same load as a single disc (ie. stack five P/N CDM-63203 in a series and achieve a total load of 37 lbs., an O.H. of .089", and a deflection of .030").




Parallel-Series Stack

Combination can be arranged to produce almost any load-vs-deflection trend (linear, pro or regressive, etc.).

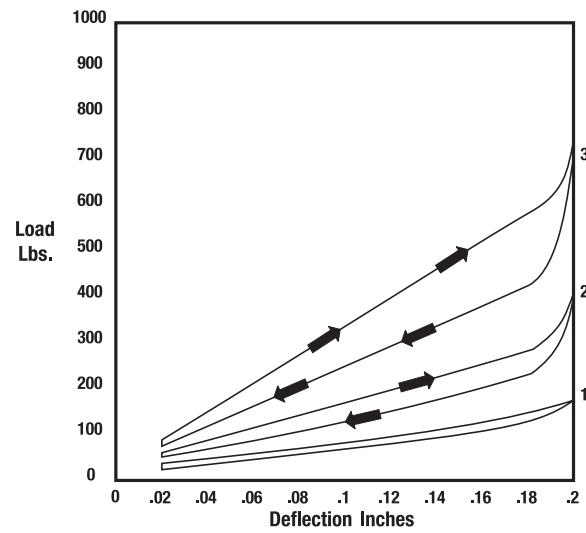

HYSTERESIS TREND EXAMPLES

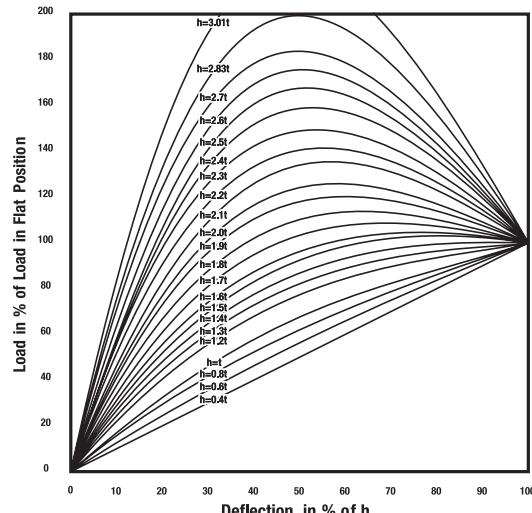


Disc Spring Load/Deflections For Various h/t Ratios

When the spring is loaded on its inside diameter so that it can be deflected beyond the flat position, the greatest possible deflection can be utilized. Since the load-deflection data beyond the flat position are symmetrical, the plot has been labeled so that loads may be determined for beyond the 100-percent flat position by reading it upside-down.


Materials

The standard material for **Century Spring's** disc springs is high carbon C-1075 for general use at room temperature.

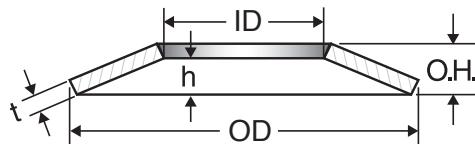


Series CDM Disc Springs HIGH CARBON STEEL

Century Stock Number	Dimensions (Inches)						@ 25% h			@ 50% h			@ 75% h			@ 100% h		
	O.D.	I.D.	t	h	O.H.	h/t	Load Lbs.	Deflection Inches	Stress x 10 ³	Load Lbs.	Deflection Inches	Stress x 10 ³	Load Lbs.	Deflection Inches	Stress x 10 ³	Load Lbs.	Deflection Inches	Stress x 10 ³
CDM-63203	0.236	0.126	0.0118	0.0060	0.0177	0.506	11	0.0015	69	20	0.0030	132	29	0.0045	188	37	0.0060	269
CDM-83202	0.315	0.126	0.0079	0.0078	0.0157	0.991	3	0.0020	34	5	0.0039	64	6	0.0059	89	7	0.0078	109
CDM-83204	0.315	0.126	0.0157	0.0080	0.0236	0.507	17	0.0020	55	31	0.0040	121	44	0.0060	196	56	0.0080	280
CDM-84202	0.315	0.165	0.0079	0.0099	0.0177	1.249	5	0.0025	61	8	0.0049	113	9	0.0074	155	10	0.0099	188
CDM-84203	0.315	0.165	0.0118	0.0099	0.0216	0.840	12	0.0025	76	21	0.0050	143	28	0.0074	199	33	0.0099	246
CDM-84204	0.315	0.165	0.0157	0.0080	0.0236	0.509	19	0.0020	68	35	0.0040	129	50	0.0060	186	64	0.0080	268
CDM-103203	0.394	0.126	0.0118	0.0139	0.0256	1.175	12	0.0035	58	19	0.0069	106	23	0.0104	146	26	0.0139	177
CDM-103204	0.394	0.126	0.0157	0.0120	0.0276	0.762	18	0.0030	54	32	0.0060	101	43	0.0090	173	52	0.0120	260
CDM-103205	0.394	0.126	0.0197	0.0099	0.0295	0.500	25	0.0025	63	47	0.0049	135	66	0.0074	218	85	0.0099	311
CDM-104204	0.394	0.165	0.0157	0.0120	0.0276	0.764	19	0.0030	62	33	0.0060	117	45	0.0090	164	55	0.0120	227
CDM-104205	0.394	0.165	0.0197	0.0099	0.0295	0.501	26	0.0025	55	49	0.0049	119	70	0.0074	192	90	0.0099	275
CDM-105225	0.394	0.205	0.0098	0.0120	0.0217	1.223	7	0.0030	58	11	0.0060	107	14	0.0090	147	15	0.0120	178
CDM-105204	0.394	0.205	0.0157	0.0120	0.0276	0.767	21	0.0030	75	37	0.0060	141	50	0.0090	198	61	0.0120	246
CDM-105205	0.394	0.205	0.0197	0.0099	0.0295	0.503	29	0.0025	66	54	0.0050	127	78	0.0074	186	99	0.0099	267
CDM-124204	0.472	0.165	0.0157	0.0159	0.0315	1.012	20	0.0040	59	34	0.0079	109	42	0.0119	152	48	0.0159	193
CDM-124205	0.472	0.165	0.0197	0.0139	0.0335	0.705	28	0.0035	55	50	0.0069	103	68	0.0104	174	84	0.0139	259
CDM-124206	0.472	0.165	0.0236	0.0159	0.0394	0.674	54	0.0040	75	98	0.0080	147	135	0.0120	248	168	0.0159	366
CDM-125205	0.472	0.205	0.0197	0.0158	0.0354	0.804	36	0.0040	76	63	0.0079	142	84	0.0119	199	101	0.0158	254
CDM-125206	0.472	0.205	0.0236	0.0139	0.0374	0.591	47	0.0035	71	87	0.0070	134	122	0.0105	210	154	0.0139	306
CDM-126205	0.472	0.244	0.0197	0.0140	0.0335	0.708	32	0.0035	73	57	0.0070	138	78	0.0105	195	97	0.0140	243
CDM-126206	0.472	0.244	0.0236	0.0140	0.0374	0.593	52	0.0035	83	95	0.0070	157	133	0.0105	223	168	0.0140	300
CDM-136235	0.492	0.244	0.0138	0.0178	0.0315	1.293	20	0.0045	77	31	0.0089	142	36	0.0134	194	38	0.0178	235
CDM-136205	0.492	0.244	0.0197	0.0139	0.0335	0.707	29	0.0035	64	51	0.0070	121	70	0.0104	171	87	0.0139	213
CDM-136207	0.492	0.244	0.0276	0.0119	0.0394	0.433	58	0.0030	66	110	0.0060	133	159	0.0090	213	206	0.0119	302
CDM-147235	0.551	0.283	0.0138	0.0178	0.0315	1.292	16	0.0045	63	25	0.0089	116	29	0.0134	159	31	0.0178	192
CDM-147205	0.551	0.283	0.0197	0.0158	0.0354	0.804	28	0.0040	63	50	0.0079	119	66	0.0119	167	80	0.0158	207
CDM-147208	0.551	0.283	0.0315	0.0119	0.0433	0.379	68	0.0030	60	131	0.0060	127	191	0.0090	201	249	0.0119	282
CDM-155204	0.591	0.205	0.0157	0.0218	0.0374	1.389	24	0.0055	61	36	0.0109	112	41	0.0164	152	42	0.0218	183
CDM-155205	0.591	0.205	0.0197	0.0198	0.0394	1.005	32	0.0050	58	52	0.0099	109	66	0.0149	150	76	0.0198	194
CDM-155206	0.591	0.205	0.0236	0.0178	0.0413	0.754	41	0.0045	55	72	0.0089	103	96	0.0134	164	118	0.0178	247
CDM-156205	0.591	0.244	0.0197	0.0198	0.0394	1.007	33	0.0050	64	54	0.0099	120	69	0.0149	166	79	0.0198	203
CDM-156206	0.591	0.244	0.0236	0.0178	0.0413	0.756	42	0.0045	61	74	0.0089	114	100	0.0134	161	123	0.0178	228
CDM-156207	0.591	0.244	0.0276	0.0158	0.0433	0.573	53	0.0040	57	98	0.0079	111	138	0.0119	182	174	0.0158	265
CDM-158207	0.591	0.323	0.0276	0.0159	0.0433	0.576	61	0.0040	73	114	0.0080	140	159	0.0119	198	202	0.0159	257
CDM-158208	0.591	0.323	0.0315	0.0159	0.0472	0.506	88	0.0040	81	166	0.0080	154	236	0.0120	220	303	0.0159	308
CDM-168204	0.630	0.323	0.0157	0.0198	0.0354	1.263	20	0.0050	60	31	0.0099	111	36	0.0149	152	38	0.0198	184
CDM-168206	0.630	0.323	0.0236	0.0179	0.0413	0.757	41	0.0045	64	72	0.0089	120	97	0.0134	169	119	0.0179	210
CDM-168207	0.630	0.323	0.0276	0.0179	0.0453	0.649	61	0.0045	71	111	0.0089	134	153	0.0134	189	191	0.0179	242
CDM-168208	0.630	0.323	0.0315	0.0159	0.0472	0.504	74	0.0040	66	138	0.0079	125	197	0.0119	186	252	0.0159	268
CDM-168209	0.630	0.323	0.0354	0.0140	0.0492	0.394	87	0.0035	60	167	0.0070	126	242	0.0105	200	315	0.0140	281
CDM-186204	0.709	0.244	0.0157	0.0238	0.039	1.515	20	0.0059	48	30	0.0119	88	33	0.0178	120	32	0.0238	143
CDM-186206	0.709	0.244	0.0236	0.0237	0.0472	1.005	45	0.0059	58	75	0.0119	108	95	0.0178	149	109	0.0237	195
CDM-186207	0.709	0.244	0.0276	0.0217	0.0492	0.787	56	0.0054	55	99	0.0109	104	132	0.0163	159	160	0.0217	241
CDM-188205	0.709	0.323	0.0197	0.0238	0.0433	1.206	33	0.0059	63	52	0.0119	116	62	0.0178	160	68	0.0238	193
CDM-188207	0.709	0.323	0.0276	0.0218	0.0492	0.789	61	0.0054	66	106	0.0109	124	142	0.0163	174	172	0.0218	216
CDM-188208	0.709	0.323	0.0315	0.0199	0.0512	0.631	74	0.0050	63	135	0.0099	119	187	0.0149	169	234	0.0199	248
CDM-188210	0.709	0.323	0.0394	0.0158	0.0551	0.402	101	0.0040	59	194	0.0079	126	282	0.0119	200	366	0.0158	282
CDM-189245	0.709	0.362	0.0177	0.0238	0.0413	1.343	28	0.0059	66	43	0.0119	122	50	0.0178	167	52	0.0238	201
CDM-189207	0.709	0.362	0.0276	0.0198	0.0472	0.717	55	0.0049	64	99	0.0099	120	134	0.0148	169	165	0.0198	211
CDM-189210	0.709	0.362	0.0394	0.0159	0.0551	0.403	108	0.0040	60	207	0.0079	124	300	0.0119	198	389	0.0159	280
CDM-208206	0.787	0.323	0.0236	0.0278	0.0512	1.177	51	0.0069	66	81	0.0139	122	97	0.0208	167	107	0.0278	203
CDM-208208	0.787	0.323	0.0315	0.0238	0.0551	0.755	75	0.0059	61	133	0.0119	114	179	0.0178	161	219	0.0238	230
CDM-208209	0.787	0.323	0.0354	0.0219	0.0571	0.618	89	0.0055	58	164	0.0109	110	227	0.0164	176	286	0.0219	259
CDM-208210	0.787	0.323	0.0394	0.0218	0.061	0.553	118	0.0054	62	220	0.0109	126	310	0.0163	207	394	0.0218	299
CDM-201005	0.787	0.402	0.0197	0.0258	0.0453	1.309	34	0.0064	64	52	0.0129	118	60	0.0193	161	63	0.0258	195
CDM-201008	0.787	0.402	0.0315	0.0218	0.0531	0.693	72	0.0055	64</td									




Series CDM Disc Springs HIGH CARBON STEEL

Century Stock Number	Dimensions (Inches)						@ 25% h			@ 50% h			@ 75% h			@ 100% h		
	O.D.	I.D.	t	h	O.H.	h/t	Load Lbs.	Deflection Inches	Stress x 10 ³	Load Lbs.	Deflection Inches	Stress x 10 ³	Load Lbs.	Deflection Inches	Stress x 10 ³	Load Lbs.	Deflection Inches	Stress x 10 ³
CDM-251209	0.984	0.480	0.0354	0.0278	0.063	0.786	87	0.0070	59	153	0.0139	111	204	0.0209	156	248	0.0278	193
CDM-251210	0.984	0.480	0.0394	0.0318	0.0709	0.808	140	0.0080	77	245	0.0159	144	325	0.0239	202	393	0.0318	250
CDM-251213	0.984	0.480	0.0492	0.0279	0.0768	0.568	204	0.0070	73	378	0.0140	140	532	0.0209	200	675	0.0279	292
CDM-251215	0.984	0.480	0.0591	0.0218	0.0807	0.370	250	0.0055	65	482	0.0109	138	702	0.0164	219	917	0.0218	307
CDM-281008	1.100	0.402	0.0315	0.0376	0.0689	1.193	83	0.0094	57	131	0.0188	106	157	0.0282	145	171	0.0376	176
CDM-281010	1.100	0.402	0.0394	0.0356	0.0748	0.904	123	0.0089	59	209	0.0178	110	270	0.0267	153	319	0.0356	210
CDM-281013	1.100	0.402	0.0492	0.0317	0.089	0.645	177	0.0079	57	321	0.0159	112	444	0.0238	188	556	0.0317	276
CDM-281015	1.100	0.402	0.0591	0.0277	0.0866	0.469	242	0.0069	65	457	0.0138	140	655	0.0208	225	845	0.0277	320
CDM-281210	1.100	0.480	0.0394	0.0377	0.0768	0.957	142	0.0094	72	238	0.0189	134	303	0.0283	186	354	0.0377	228
CDM-281213	1.100	0.480	0.0492	0.0338	0.0827	0.687	203	0.0085	70	366	0.0169	132	500	0.0254	185	621	0.0338	268
CDM-281408	1.100	0.559	0.0315	0.0398	0.0709	1.262	104	0.0099	79	163	0.0199	146	191	0.0298	200	204	0.0398	242
CDM-281410	1.100	0.559	0.0394	0.0318	0.0709	0.807	114	0.0079	63	199	0.0159	119	264	0.0238	167	320	0.0318	206
CDM-281415	1.100	0.559	0.0591	0.0258	0.0846	0.436	249	0.0064	62	473	0.0129	122	683	0.0193	196	884	0.0258	278
CDM-321608	1.240	0.642	0.0315	0.0416	0.0728	1.321	91	0.0104	68	140	0.0208	125	161	0.0312	171	169	0.0416	206
CDM-321613	1.240	0.642	0.0492	0.0358	0.0846	0.727	188	0.0089	68	335	0.0179	129	454	0.0268	182	559	0.0358	226
CDM-321615	1.240	0.642	0.0591	0.0359	0.0945	0.607	304	0.0090	77	557	0.0179	147	776	0.0269	208	979	0.0359	276
CDM-321618	1.240	0.642	0.069	0.0278	0.0965	0.403	335	0.0070	61	641	0.0139	125	930	0.0209	199	1209	0.0278	281
CDM-321620	1.240	0.642	0.0787	0.0300	0.1083	0.382	535	0.0075	75	1029	0.0150	158	1497	0.0225	251	1952	0.0300	353
CDM-341210	1.340	0.484	0.0394	0.0495	0.0886	1.256	151	0.0124	65	237	0.0247	120	278	0.0371	164	297	0.0495	198
CDM-341213	1.340	0.484	0.0492	0.0436	0.0925	0.885	194	0.0109	60	331	0.0218	112	431	0.0327	156	512	0.0436	221
CDM-341215	1.340	0.484	0.0591	0.0396	0.0984	0.669	262	0.0099	58	472	0.0198	111	649	0.0297	187	809	0.0396	276
CDM-341413	1.340	0.563	0.0492	0.0457	0.0945	0.928	217	0.0114	70	367	0.0228	131	473	0.0342	182	555	0.0457	224
CDM-341615	1.340	0.642	0.0591	0.0417	0.1004	0.706	309	0.0104	76	553	0.0209	143	753	0.0313	202	932	0.0417	259
CDM-341620	1.340	0.642	0.0787	0.0339	0.1122	0.431	505	0.0085	69	962	0.0170	146	1389	0.0254	234	1799	0.0339	332
CDM-361809	1.400	0.720	0.0354	0.0456	0.0807	1.289	107	0.0114	64	167	0.0228	118	194	0.0342	162	206	0.0456	196
CDM-361813	1.400	0.720	0.0492	0.0398	0.0886	0.808	173	0.0099	62	301	0.0199	116	400	0.0298	163	484	0.0398	201
CDM-361820	1.400	0.720	0.0787	0.0319	0.1102	0.405	445	0.0080	63	853	0.0159	128	1236	0.0239	204	1607	0.0319	288
CDM-401413	1.570	0.563	0.0492	0.0554	0.1043	1.126	216	0.0139	62	348	0.0277	115	424	0.0415	159	472	0.0554	193
CDM-401415	1.570	0.563	0.0591	0.0495	0.1083	0.837	268	0.0124	58	463	0.0247	108	610	0.0371	151	733	0.0495	227
CDM-401420	1.570	0.563	0.0787	0.0417	0.1201	0.530	434	0.0104	60	811	0.0208	132	1149	0.0313	214	1467	0.0417	307
CDM-401615	1.570	0.642	0.0591	0.0515	0.1102	0.871	294	0.0129	66	504	0.0257	124	658	0.0386	172	785	0.0515	218
CDM-401620	1.570	0.642	0.0787	0.0437	0.122	0.555	475	0.0109	62	882	0.0218	127	1244	0.0328	208	1582	0.0437	301
CDM-402010	1.570	0.803	0.0394	0.0516	0.0906	1.309	135	0.0129	64	208	0.0258	118	241	0.0387	162	254	0.0516	196
CDM-402015	1.570	0.803	0.0591	0.0456	0.1043	0.772	266	0.0114	66	468	0.0228	125	627	0.0342	175	765	0.0456	217
CDM-402020	1.570	0.803	0.0787	0.0439	0.122	0.557	527	0.0110	75	978	0.0219	144	1377	0.0329	204	1751	0.0439	289
CDM-402023	1.570	0.803	0.0886	0.0358	0.124	0.404	565	0.0090	63	1083	0.0179	129	1570	0.0269	205	2042	0.0358	290
CDM-402025	1.570	0.803	0.0984	0.0379	0.1358	0.385	817	0.0095	73	1573	0.0190	155	2286	0.0284	246	2979	0.0379	346
CDM-452213	1.770	0.882	0.0492	0.0635	0.1122	1.291	248	0.0159	76	385	0.0318	139	447	0.0476	191	473	0.0635	231
CDM-452218	1.770	0.882	0.0689	0.0517	0.1201	0.750	364	0.0129	66	644	0.0258	125	868	0.0388	176	1064	0.0517	218
CDM-452225	1.770	0.882	0.0984	0.0398	0.1378	0.405	666	0.0100	59	1277	0.0199	125	1851	0.0299	199	2406	0.0398	281
CDM-501813	1.970	0.724	0.0492	0.0633	0.1122	1.286	178	0.0158	49	277	0.0316	90	322	0.0474	123	342	0.0633	148
CDM-501815	1.970	0.724	0.0591	0.0712	0.1299	1.205	327	0.0178	64	517	0.0356	118	616	0.0534	162	670	0.0712	196
CDM-501825	1.970	0.724	0.0984	0.0635	0.1614	0.646	891	0.0159	72	1618	0.0318	141	2235	0.0477	235	2798	0.0635	346
CDM-501830	1.970	0.724	0.1181	0.0556	0.1732	0.471	1218	0.0139	82	2303	0.0278	176	3299	0.0417	283	4252	0.0556	402
CDM-502020	1.970	0.803	0.0787	0.0595	0.1378	0.756	468	0.0149	60	826	0.0298	114	1111	0.0446	160	1360	0.0595	230
CDM-502025	1.970	0.803	0.0984	0.0536	0.1516	0.545	720	0.0134	60	1339	0.0268	125	1891	0.0402	204	2409	0.0536	295
CDM-502220	1.970	0.882	0.0787	0.0636	0.1417	0.808	535	0.0159	71	933	0.0318	134	1240	0.0477	187	1500	0.0636	231
CDM-502225	1.970	0.882	0.0984	0.0556	0.1535	0.566	780	0.0139	68	1445	0.0278	129	2032	0.0417	203	2580	0.0556	294
CDM-502513	1.970	1.000	0.0492	0.0634	0.1122	1.289	201	0.0159	62	312	0.0317	114	363	0.0476	156	384	0.0634	188
CDM-502515	1.970	1.000	0.0591	0.0634	0.122	1.073	293	0.0159	67	479	0.0317	125	592	0.0476	173	668	0.0634	211
CDM-502520	1.970	1.000	0.0787	0.0557	0.1339	0.708	464	0.0139	66	829	0.0279	124	1129	0.0418	175	1396	0.0557	217
CDM-502525	1.970	1.000	0.0984	0.0558	0.1535	0.567	834	0.0139	76	1543	0.0279	145	2169	0.0418	206	2754	0.0558	290
CDM-502530	1.970	1.000	0.1181	0.0438	0.1614	0.371	1021	0.0110	65	1970	0.0219	138	2871	0.0329	218	3747	0.0438	306
CDM-562915	2.200	1.122	0.0591	0.0773	0.1358	1.308	347	0.0193	74	537	0.0387	136	622	0.0580	186	654	0.0773	224
CDM-562920	2.200	1.122	0.0787	0.0636	0.1417	0.808	456	0.0159	63	794	0.0318	119	1055</td					

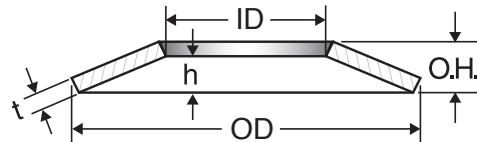

Series CDM Disc Springs HIGH CARBON STEEL

Century Stock Number	Dimensions (Inches)						@ 25% h			@ 50% h			@ 75% h			@ 100% h		
	O.D.	I.D.	t	h	O.H.	h/t	Load Lbs.	Deflection Inches	Stress x 10 ³	Load Lbs.	Deflection Inches	Stress x 10 ³	Load Lbs.	Deflection Inches	Stress x 10 ³	Load Lbs.	Deflection Inches	Stress x 10 ³
CDM-803640	3.150	1.420	0.1575	0.0875	0.2441	0.555	1960	0.0219	67	3637	0.0437	152	5125	0.0656	201	6520	0.0750	291
CDM-804123	3.150	1.610	0.0886	0.1172	0.2047	1.322	878	0.0293	82	1354	0.0586	152	1562	0.0879	208	1635	0.1172	251
CDM-804140	3.150	1.610	0.1575	0.0877	0.2441	0.557	2097	0.0219	75	3890	0.0438	143	5480	0.0658	203	6969	0.0877	287
CDM-804150	3.150	1.610	0.1968	0.0678	0.2638	0.345	2844	0.0170	67	5511	0.0339	142	8062	0.0509	224	10553	0.0678	314
CDM-904625	3.540	1.810	0.0984	0.1271	0.2244	1.292	1007	0.0318	77	1563	0.0636	143	1818	0.0953	196	1923	0.1271	237
CDM-904635	3.540	1.810	0.1378	0.0994	0.2362	0.721	1392	0.0248	64	2480	0.0497	121	3366	0.0745	171	4151	0.0994	213
CDM-904650	3.540	1.810	0.1968	0.0797	0.2756	0.405	2709	0.0199	61	5191	0.0399	125	7524	0.0598	199	9781	0.0797	281
CDM-1004150	3.940	1.610	0.1968	0.1092	0.3051	0.555	2951	0.0273	62	5477	0.0546	126	7719	0.0819	206	9820	0.1092	298
CDM-1005127	3.940	2.010	0.1063	0.1389	0.2441	1.307	1132	0.0347	74	1751	0.0695	137	2028	0.1042	187	2134	0.1389	226
CDM-1005135	3.940	2.010	0.1378	0.1112	0.248	0.807	1331	0.0278	60	2321	0.0556	114	3084	0.0834	159	3732	0.1112	197
CDM-1005140	3.940	2.010	0.1575	0.1194	0.2756	0.758	2071	0.0298	73	3657	0.0597	137	4918	0.0895	193	6017	0.1194	239
CDM-1005150	3.940	2.010	0.1968	0.1117	0.3071	0.568	3351	0.0279	77	6200	0.0559	146	8715	0.0838	207	11063	0.1117	291
CDM-1005160	3.940	2.010	0.2362	0.0877	0.3228	0.371	4099	0.0219	65	7907	0.0438	138	11520	0.0657	218	15037	0.0877	306
CDM-1125730	4.410	2.240	0.1181	0.1548	0.2717	1.311	1381	0.0387	73	2135	0.0774	135	2470	0.1161	185	2596	0.1548	223
CDM-1125740	4.410	2.240	0.1575	0.1271	0.2835	0.807	1813	0.0318	63	3160	0.0636	118	4197	0.0954	166	5078	0.1271	205
CDM-1125760	4.410	2.240	0.2362	0.0995	0.3346	0.421	3775	0.0249	59	7212	0.0497	119	10424	0.0746	190	13524	0.0995	269
CDM-1254140	4.920	1.610	0.1575	0.1661	0.3228	1.055	2023	0.0415	56	3315	0.0831	105	4119	0.1246	144	4678	0.1661	188
CDM-1255140	4.920	2.010	0.1575	0.1783	0.3346	1.132	2404	0.0446	70	3866	0.0892	131	4701	0.1337	180	5222	0.1783	219
CDM-1255150	4.920	2.010	0.1968	0.1548	0.3504	0.786	3120	0.0387	64	5468	0.0774	121	7302	0.1161	169	8878	0.1548	235
CDM-1256180	4.920	2.400	0.295	0.1361	0.4291	0.461	8356	0.0340	83	15835	0.0680	163	22728	0.1021	263	29330	0.1361	375
CDM-1256435	4.920	2.520	0.1378	0.1788	0.315	1.297	2027	0.0447	79	3141	0.0894	146	3648	0.1341	201	3851	0.1788	243
CDM-1256480	4.920	2.520	0.295	0.1241	0.4173	0.421	7662	0.0310	77	14640	0.0621	154	21163	0.0931	246	27458	0.1241	348
CDM-1257180	4.920	2.800	0.2913	0.1203	0.4094	0.413	7713	0.0301	83	14760	0.0602	160	21342	0.0902	241	27725	0.1203	341
CDM-1407238	5.510	2.840	0.1496	0.1945	0.3425	1.300	2256	0.0486	75	3495	0.0973	138	4055	0.1459	190	4277	0.1945	229
CDM-1407250	5.510	2.840	0.1968	0.1590	0.3543	0.808	2853	0.0397	64	4972	0.0795	120	6603	0.1192	168	7990	0.1590	208
CDM-1506150	5.910	2.400	0.1968	0.2102	0.4055	1.068	3634	0.0525	70	5934	0.1051	129	7346	0.1576	179	8313	0.2102	217
CDM-1506160	5.910	2.400	0.2362	0.1905	0.4252	0.806	4663	0.0476	66	8130	0.0952	124	10801	0.1428	174	13074	0.1905	238
CDM-1608243	6.300	3.230	0.1693	0.2223	0.3898	1.313	2884	0.0556	74	4456	0.1112	137	5153	0.1668	188	5412	0.2223	227
CDM-1608260	6.300	3.230	0.2362	0.1789	0.4134	0.757	4092	0.0447	64	7225	0.0894	121	9719	0.1342	169	11892	0.1789	210
CDM-1809248	7.090	3.620	0.189	0.2461	0.4331	1.302	3464	0.0615	72	5365	0.1230	133	6223	0.1845	182	6560	0.2461	220
CDM-1809260	7.090	3.620	0.2362	0.2025	0.437	0.857	3915	0.0506	60	6738	0.1012	112	8834	0.1519	157	10565	0.2025	194
CDM-1809210	7.090	3.620	0.37	0.1836	0.5512	0.496	11120	0.0459	72	20914	0.0918	137	29824	0.1377	206	38293	0.1836	296
CDM-2008280	7.870	3.230	0.2992	0.2619	0.5591	0.875	7957	0.0654	70	13641	0.1309	131	17800	0.1964	183	21196	0.2619	228
CDM-2008210	7.870	3.230	0.378	0.2343	0.6102	0.620	12024	0.0585	69	21991	0.1171	130	30571	0.1757	208	38457	0.2343	305
CDM-2008212	7.870	3.230	0.4528	0.2026	0.6535	0.447	16216	0.0506	72	30847	0.1013	154	44373	0.1519	246	57386	0.2026	349
CDM-2009210	7.870	3.620	0.374	0.2429	0.6142	0.649	12836	0.0607	78	23287	0.1214	148	32148	0.1821	209	40226	0.2429	298
CDM-2009212	7.870	3.620	0.4488	0.2151	0.6614	0.479	17772	0.0537	75	33577	0.1075	152	48048	0.1613	246	61850	0.2151	351
CDM-2009214	7.870	3.620	0.516	0.1992	0.7126	0.386	23996	0.0498	83	46160	0.0996	177	67103	0.1494	280	87434	0.1992	394
CDM-20010210	7.870	4.020	0.37	0.2477	0.6142	0.669	13575	0.0619	88	24507	0.1238	166	33676	0.1858	234	41963	0.2477	293
CDM-20010212	7.870	4.020	0.443	0.1972	0.6375	0.445	16230	0.0493	72	30859	0.0986	140	44422	0.1479	225	57451	0.1972	319
CDM-20010214	7.870	4.020	0.516	0.2039	0.7165	0.395	26090	0.0510	85	50101	0.1019	178	72728	0.1529	283	94662	0.2039	399
CDM-20011212	7.870	4.410	0.437	0.2043	0.6378	0.468	17471	0.0510	84	33094	0.1021	161	47460	0.1532	230	61198	0.2043	327
CDM-20011214	7.870	4.410	0.5079	0.1845	0.689	0.363	23615	0.0460	82	45714	0.0922	164	66685	0.1383	260	87160	0.1845	365
CDM-20011216	7.870	4.410	0.5827	0.1604	0.7402	0.275	30125	0.0401	86	59027	0.0802	178	87113	0.1203	277	114789	0.1604	382
CDM-22511265	8.860	4.410	0.2441	0.2936	0.5354	1.203	5321	0.0734	68	8421	0.1468	126	10040	0.2202	174	10918	0.2936	210
CDM-22511280	8.860	4.410	0.295	0.2784	0.5709	0.944	7271	0.0696	69	12243	0.1392	129	15681	0.2088	180	18353	0.2784	221
CDM-22511212	8.860	4.410	0.443	0.2289	0.6693	0.517	15165	0.0572	68	28392	0.1145	129	40326	0.1717	194	51613	0.2289	280
CDM-25010210	9.840	4.020	0.378	0.3334	0.7087	0.882	13127	0.0833	72	22463	0.1667	135	29251	0.2500	188	34779	0.3334	235
CDM-25012710	9.840	5.000	0.37	0.3025	0.6693	0.818	11651	0.0756	73	20257	0.1513	138	26833	0.2269	193	32393	0.3025	238
CDM-25012712	9.840	5.000	0.443	0.3212	0.7598	0.725	20008	0.0803	89	35617	0.1606	168	48293	0.2409	237	59503	0.3212	295
CDM-25012714	9.840	5.000	0.516	0.2591	0.7717	0.502	22121	0.0648	73	41550	0.1295	140	59185	0.1943	210	75924	0.2591	302
CDM-25012716	9.840	5.000	0.591	0.2716	0.8583	0.460	34298	0.0679	86	65017	0.1358	165	93351	0.2037	263	120456	0.2716	374




Series CDM Disc Springs STAINLESS STEEL

Century Stock Number	Dimensions (Inches)						@ 25% h			@ 50% h			@ 75% h			@ 100% h		
	O.D.	I.D.	t	h	O.H.	h/t	Load Lbs.	Deflection Inches	Stress x 10 ³	Load Lbs.	Deflection Inches	Stress x 10 ³	Load Lbs.	Deflection Inches	Stress x 10 ³	Load Lbs.	Deflection Inches	Stress x 10 ³
CDM-136205S	0.492	0.244	0.02	0.014	0.034	0.7	29	0.0035	64	51	0.007	121	70	0.0105	171	87	0.014	213
CDM-136207S	0.492	0.244	0.0276	0.0118	0.0394	0.428	58	0.003	66	110	0.0059	133	159	0.0089	213	206	0.0118	302
CDM-158207S	0.591	0.323	0.028	0.015	0.043	0.536	61	0.0038	73	114	0.0075	140	159	0.0113	198	202	0.015	257
CDM-208209S	0.787	0.323	0.0354	0.0216	0.057	0.61	89	0.0054	58	164	0.0108	110	227	0.0162	176	286	0.0216	259
CDM-231213S	0.906	0.48	0.0492	0.0238	0.073	0.484	208	0.006	77	392	0.0119	147	560	0.0179	216	720	0.0238	310
CDM-251209S	0.984	0.48	0.0354	0.0276	0.063	0.78	87	0.0069	59	153	0.0138	111	204	0.0207	156	248	0.0276	193
CDM-251215S	0.984	0.48	0.0591	0.0216	0.0807	0.365	250	0.0054	65	482	0.0108	138	702	0.0162	219	917	0.0216	307
CDM-281408S	1.1	0.559	0.032	0.039	0.071	1.219	104	0.0098	79	163	0.0195	146	191	0.0293	200	204	0.039	242
CDM-321608S	1.24	0.642	0.032	0.041	0.073	1.281	91	0.0103	68	140	0.0205	125	161	0.0308	171	169	0.041	206
CDM-402025S	1.57	0.803	0.098	0.041	0.139	0.418	817	0.0103	73	1573	0.0205	155	2286	0.0308	246	2979	0.041	346
CDM-452225S	1.77	0.882	0.0984	0.0396	0.138	0.402	666	0.0099	59	1277	0.0198	125	1851	0.0297	199	2406	0.0396	281

CDS Disc Springs HIGH CARBON STEEL (SIZED FOR BOLTS)

Century Stock Number	Bolt Size	Dimensions Inches					@ 100% h			
		O.D.	I.D.	t	h	O.H.	Max Load Lbs.	Max Deflection Inches		
CDS-180907	#2	0.187	0.093	0.007	0.006	0.013	12	0.006		
CDS-180910	#2	0.187	0.093	0.010	0.005	0.015	29	0.005		
CDS-251209	#4	0.250	0.125	0.009	0.008	0.017	19	0.008		
CDS-251213	#4	0.250	0.125	0.013	0.007	0.020	50	0.007		
CDS-371219	#4	0.375	0.125	0.019	0.010	0.028	81	0.010		
CDS-281313	#6	0.281	0.138	0.013	0.008	0.021	43	0.008		
CDS-281315	#6	0.281	0.138	0.015	0.008	0.023	69	0.008		
CDS-431322	#6	0.437	0.138	0.022	0.010	0.032	98	0.010		
CDS-311511	#6	0.312	0.156	0.011	0.011	0.022	30	0.011		
CDS-311517	#6	0.312	0.156	0.017	0.008	0.025	82	0.008		
CDS-341613	#8	0.343	0.164	0.013	0.011	0.024	38	0.011		
CDS-341619	#8	0.343	0.164	0.019	0.009	0.028	104	0.009		
CDS-501625	#8	0.500	0.164	0.025	0.012	0.037	131	0.012		
CDS-561928	0.1875	0.562	0.190	0.028	0.014	0.042	163	0.014		
CDS-371915	0.1875	0.375	0.195	0.015	0.012	0.027	59	0.012		
CDS-371918	0.1875	0.375	0.195	0.018	0.010	0.028	85	0.010		
CDS-371920	0.1875	0.375	0.195	0.020	0.010	0.030	118	0.010		
CDS-371930	0.1875	0.375	0.195	0.030	0.010	0.040	410	0.010		
CDS-432216	#12	0.437	0.220	0.016	0.015	0.031	60	0.015		
CDS-432220	#12	0.437	0.220	0.020	0.012	0.032	98	0.012		
CDS-432223	#12	0.437	0.220	0.023	0.011	0.034	139	0.011		
CDS-682234	#12	0.687	0.220	0.034	0.016	0.050	229	0.016		
CDS-502518	0.25	0.500	0.255	0.018	0.016	0.034	75	0.016		
CDS-502522	0.25	0.500	0.255	0.022	0.015	0.036	115	0.015		
CDS-502525	0.25	0.500	0.255	0.025	0.013	0.038	165	0.013		
CDS-502538	0.25	0.500	0.255	0.038	0.010	0.048	454	0.010		
CDS-752552	0.25	0.750	0.255	0.052	0.013	0.065	560	0.013		
CDS-502519	0.25	0.500	0.258	0.019	0.016	0.035	89	0.016		
CDS-623122	0.3125	0.625	0.317	0.022	0.020	0.042	110	0.020		
CDS-933130	0.3125	0.937	0.317	0.030	0.030	0.060	159	0.030		
CDS-623132	0.3125	0.625	0.317	0.032	0.016	0.048	273	0.016		
CDS-933145	0.3125	0.937	0.317	0.045	0.022	0.067	404	0.022		
CDS-623147	0.3125	0.625	0.317	0.047	0.012	0.059	600	0.012		
CDS-753227	0.3125	0.750	0.320	0.028	0.024	0.052	174	0.024		
CDS-753231	0.3125	0.750	0.320	0.032	0.024	0.056	261	0.024		
CDS-753828	0.375	0.750	0.380	0.028	0.023	0.051	180	0.023		
CDS-753834	0.375	0.750	0.380	0.034	0.021	0.055	297	0.021		
CDS-753840	0.375	0.750	0.380	0.040	0.019	0.059	415	0.019		
CDS-753856	0.375	0.750	0.380	0.056	0.014	0.070	897	0.014		
CDS-683827	0.375	0.688	0.382	0.028	0.020	0.048	200	0.020		
CDS-753831	0.375	0.750	0.382	0.032	0.020	0.052	236	0.020		
CDS-753835	0.375	0.750	0.382	0.035	0.022	0.057	342	0.022		
CDS-155047	0.5	1.500	0.505	0.047	0.046	0.093	366	0.046		
CDS-125060	0.5	1.262	0.505	0.060	0.031	0.091	731	0.031		
CDS-155070	0.5	1.500	0.505	0.070	0.034	0.104	896	0.034		

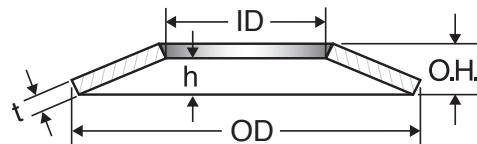

CDS Disc Springs HIGH CARBON STEEL (SIZED FOR BOLTS)

Century Stock Number	Bolt Size	Dimensions Inches					@ 100% h	
		O.D.	I.D.	t	h	O.H.	Max Load Lbs.	Max Deflection Inches
CDS-155002	0.5	1.500	0.505	0.102	0.026	0.128	2060	0.026
CDS-105135	0.5	1.000	0.512	0.035	0.032	0.067	277	0.032
CDS-105139	0.5	1.000	0.512	0.039	0.036	0.075	436	0.036
CDS-115139	0.5	1.100	0.512	0.039	0.036	0.075	339	0.036
CDS-105043	0.5	1.000	0.512	0.043	0.028	0.071	431	0.028
CDS-105149	0.5	1.000	0.512	0.049	0.034	0.083	825	0.034
CDS-115149	0.5	1.100	0.512	0.049	0.030	0.083	640	0.034
CDS-105159	0.5	1.000	0.512	0.059	0.028	0.087	1190	0.028
CDS-115159	0.5	1.100	0.512	0.059	0.028	0.087	923	0.028
CDS-105173	0.5	1.000	0.512	0.073	0.018	0.091	1442	0.018
CDS-126340	0.625	1.250	0.630	0.040	0.042	0.082	344	0.042
CDS-126351	0.625	1.250	0.630	0.051	0.036	0.087	582	0.036
CDS-126389	0.625	1.250	0.630	0.089	0.022	0.111	2019	0.022
CDS-136359	0.625	1.375	0.637	0.059	0.043	0.102	901	0.043
CDS-136967	0.6875	1.375	0.692	0.067	0.034	0.101	1089	0.034
CDS-157545	0.75	1.500	0.755	0.045	0.048	0.093	386	0.048
CDS-227568	0.75	2.250	0.755	0.068	0.069	0.137	732	0.069
CDS-157572	0.75	1.500	0.755	0.072	0.037	0.109	1235	0.037
CDS-227510	0.75	2.250	0.755	0.102	0.051	0.153	1822	0.051
CDS-1575107	0.75	1.500	0.755	0.107	0.027	0.134	2991	0.027
CDS-227515	0.75	2.250	0.755	0.150	0.038	0.188	4295	0.038
CDS-157659	0.75	1.500	0.761	0.059	0.055	0.114	1019	0.055
CDS-157678	0.75	1.500	0.761	0.078	0.044	0.122	1897	0.044
CDS-157698	0.75	1.500	0.761	0.098	0.036	0.134	3097	0.036
CDS-178857	0.875	1.750	0.880	0.057	0.057	0.114	650	0.057
CDS-178885	0.875	1.750	0.880	0.085	0.043	0.128	1735	0.043
CDS-201084	1	2.000	1.000	0.084	0.052	0.136	1488	0.052
CDS-301090	1	3.000	1.000	0.090	0.090	0.180	1244	0.090
CDS-301013	1	3.000	1.000	0.135	0.067	0.202	3118	0.067
CDS-231078	1	2.375	1.016	0.078	0.079	0.157	1231	0.079
CDS-231011	1	2.375	1.016	0.118	0.063	0.181	3434	0.063
CDS-221173	1.125	2.250	1.125	0.073	0.075	0.148	1100	0.075
CDS-221111	1.125	2.250	1.125	0.111	0.054	0.165	2780	0.054
CDS-251280	1.25	2.500	1.250	0.080	0.080	0.160	1301	0.080
CDS-251212	1.25	2.500	1.250	0.120	0.060	0.180	3322	0.060
CDS-371216	1.25	3.750	1.250	0.168	0.083	0.251	4754	0.083
CDS-251217	1.25	2.500	1.250	0.175	0.044	0.219	7149	0.044
CDS-271387	1.375	2.750	1.375	0.087	0.086	0.173	1440	0.086
CDS-271313	1.375	2.750	1.375	0.132	0.064	0.196	3210	0.064
CDS-301514	1.5	3.000	1.500	0.143	0.070	0.213	4380	0.070
CDS-402012	2	4.000	2.000	0.125	0.125	0.250	2910	0.125



CDS Disc Springs STAINLESS STEEL (SIZED FOR BOLTS)

Century Stock Number	Bolt Size	Dimensions Inches				
		O.D.	I.D.	t	h	O.H.
CDS-180910S	#2	0.187	0.093	0.010	0.005	0.015
CDS-251213S	#4	0.250	0.125	0.013	0.007	0.020
CDS-371915S	0.188	0.375	0.195	0.015	0.012	0.027
CDS-502538S	0.250	0.500	0.255	0.038	0.010	0.048

SP Series Disc Springs

For Heavy Bolted Sections

SP Series Disc Springs for heavy bolted applications such as those required for bus bar and transformer applications, are used wherever there is a need to overcome the effects of thermal expansion and contraction. Disc springs are normally manufactured from high carbon or alloy steel; AISI C1075 or 6150 material.

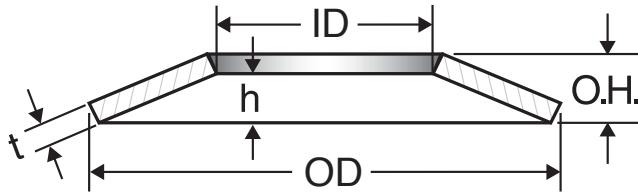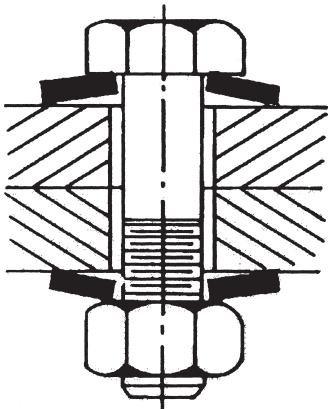

Important Notice: SP Series springs are not pre-stressed. They are designed for static bolted applications only.

Tolerances

O.D.:	+ .000 / - 1.5% x O.D.	O.H.:	is a reference and used to control the needed load
I.D.:	- .000 / + 1.5% I.D.	Load:	+ 20% of nominal shown
Thickness:	thickness is subject to mil-run tolerances	Hardness:	RC 43-50

SP Series Disc Springs


Century Stock Number	Nominal Bolt Size	Metric Size	Dimensions (Inches)						Load Lbs @ Flat	Weight Pounds per M
			O.D.	I.D.	t	1) O.H.	2) O.H.			
SP-52203	-	M2	0.197	0.087	0.012	0.020	0.016	65	0.1	
SP-62704	-	M2.5	0.236	0.106	0.016	0.026	0.020	146	0.2	
SP-73205	.125, #5	M3	0.276	0.126	0.020	0.030	0.025	210	0.3	
SP-94308	.156, #8	M4	0.354	0.169	0.031	0.043	0.037	590	0.7	
SP-115310	.188, #10	M5	0.433	0.209	0.039	0.055	0.047	1070	1.3	
SP-146412	0.125	M6	0.551	0.252	0.050	0.067	0.056	1390	2.5	
SP-188420	0.313	M8	0.709	0.331	0.078	0.102	0.088	4755	6.9	
SP-218425	0.313	M8	0.827	0.331	0.098	0.118	0.108	5345	12.5	
SP-231120	0.038	M10	0.906	0.413	0.078	0.106	0.094	3200	11.4	
SP-241130	0.375	M10	0.945	0.413	0.118	0.146	0.130	8000	18.9	
SP-291325	0.500	M12	1.142	0.512	0.098	0.130	0.116	4700	22.9	
SP-321335	0.500	M12	1.260	0.512	0.138	0.169	0.156	9900	40.0	
SP-391540	0.563	M14	1.535	0.591	0.157	0.197	0.181	12000	70.0	
SP-391735	0.625	M16	1.535	0.669	0.138	0.185	0.162	10000	58.5	
SP-471950	-	M18	1.850	0.748	0.197	0.244	0.222	20000	125.0	
SP-522160	0.750	M20	2.047	0.827	0.236	0.287	0.246	31000	159.0	
SP-562360	0.875	M22	2.205	0.906	0.236	0.311	0.268	40276	212.0	
SP-702870	1.000	M27	2.756	1.102	0.276	0.362	0.317	46000	392.0	
SP-773175	1.125	M30	3.031	1.220	0.295	0.386	0.343	49000	508.0	

1) When delivered 2) After first loading

A "K" factor of .2 was used for the dry torque calculation. Use .15 if lubricated. The basic metric formula used for foot pounds is $T = K(D/12)P$ (T = torque, K = K factor for the coefficient of friction and D = normal bolt diameter)

Note: SP Belleville Springs are available in stainless 17/7 PH. Call for availability of stainless.

FL & MFL Series Flange Springs

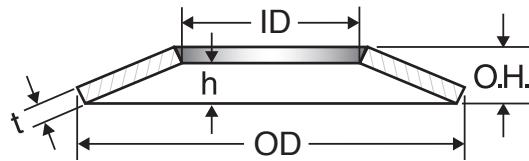

Tolerances

O.D.:	+ .000/- 1.5% x O.D. (Designed for standard flange spot face diameter)
I.D.:	- .000 / + 1.5% I.D.
Thickness:	± 5% x nominal thickness shown
Load:	± 20% of nominal shown

Spring discs are an elastic mechanical element. When used in bolt joints that are subject to thermal or mechanical shock, they deflect and move with the bolted joint. Hence, they compensate for developed looseness. The reactive power of the spring disc serves to keep the bolt joint tight under all conditions. Principal applications include piping construction, compression joints, steam piping joints, valve and pump connections, and others in the petrochemical field.

A principal cause of flange leakage is abnormally high loads produced by thermal expansion and contraction of a bolted joint. Generally, flanges are under static load conditions. However, in large piping systems, there may also be mechanical shock from compressor related piping. Thermal and mechanical shock differential can cause variation and yielding in bolt loads. To protect against these conditions, always use spring discs under the nut or bolthead.

Pre-stressing or torquing the bolt at factory installation is not sufficient to protect the flange joint under unexpected temperature variations and mechanical shock loads in the field. By absorbing peak stresses, spring discs prevent damage to the bolt, gasket and joint.

Material

Stainless	17-7 PH (Armco) precipitation hardened
Hardness	RC 38-43
Temperature Range	-220° C to +300° C

Flange Springs FL SERIES FLANGE SPRING

Century Stock Number	Nominal Bolt Size	Metric Size	Dimensions Inches				Load @ flat Lbs.	Torque to flat Ft.-Lbs.
			O.D.	I.D.	t	O.H.		
FL-28281S	1.75	M45	3.17	1.812	0.281	0.329	23000	730
FL-30300S	1.875	M48	3.38	1.937	0.3	0.353	28000	960
FL-32318S	2	M52	3.6	2.062	0.318	0.375	32000	1120


Note: Load calculated for 17-7 PH stainless steel with large radii, R=1/4

Flange Springs MFL SERIES FLANGE SPRING

Century Stock Number	Nominal Bolt Size	Metric Size	Dimensions mm				Load @ flat N	Torque to flat N-m
			O.D.	I.D.	t	O.H.		
MFL-12090S	12	M12	22	12.4	2.30	2.60	13000	34
MFL-20160S	20	M20	36	20.8	4.00	4.60	43000	190
MFL-27168S	27	M27	49	27.8	4.30	5.00	40000	240

Note: Load calculated for 17-7 PH stainless steel with large radii, R=1/4

NDS Series Flange Springs

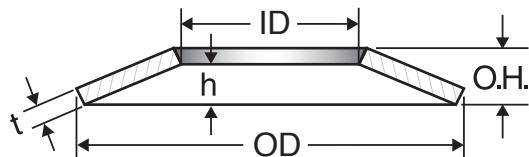

NDS (National Disc Spring) Flange Disc Springs maintain bolt tension and gasket pressure around the flange, especially under conditions of thermal variations or mechanical shock which may disturb the bolted joint. They counteract loosening and assure the integrity of the bolted flange under the most severe conditions. The proper use of NDS Flange Disc Springs will ensure that the gasketed joints will completely maintain the seal and not leak, reducing pollution, ensuring safety and reduce pipe line down time.

The NDS Flange Disc Spring is “live loaded”, which means it automatically adjusts for thermal variation, vibration and mechanical shock stress.

Flange disc springs are precision machined on all surfaces with well-rounded edges.

Use: Single or stacked on each end of the bolt, depending on estimated bolt elongation.

Material used is H11/H13 steel which can be used at high temperatures. Under most conditions, the NDS parts can withstand temperatures in the range of 1100°F (590°C).

Flange Springs NDS SERIES FLANGE SPRINGS

Century Stock Number	Nominal Bolt Size	Dimensions Inches			Deflection @ Flat Inches	Load @ Flat Lbs.	Torque In Ft.-Lbs.
		I.D.	O.D.	t			
NDS-1-60	0.5	0.515	1.011	0.148	0.014	8500	80
NDS-1-30	0.5	0.515	1.011	0.13	0.01	4200	30
NDS-1-45	0.5	0.515	1.011	0.14	0.01	6400	45
NDS-2-60	0.625	0.644	1.148	0.187	0.012	13500	120
NDS-2-45	0.625	0.644	1.148	0.18	0.011	9900	90
NDS-2-30	0.625	0.644	1.148	0.152	0.012	6500	60
NDS-3-60	0.75	0.773	1.37	0.224	0.015	20000	200
NDS-3-45	0.75	0.773	1.37	0.22	0.012	15000	150
NDS-3-30	0.75	0.773	1.37	0.19	0.013	9700	100
NDS-4-60	0.875	0.901	1.59	0.28	0.015	28000	320
NDS-4-45	0.875	0.901	1.59	0.265	0.013	20000	240
NDS-4-30	0.875	0.901	1.59	0.22	0.015	13000	160
NDS-5-60	1	1.03	1.81	0.316	0.018	36000	490
NDS-5-45	1	1.03	1.81	0.305	0.015	27000	365
NDS-5-30	1	1.03	1.81	0.26	0.016	18000	245
NDS-6-60	1.125	1.155	2.025	0.37	0.018	47000	700
NDS-6-45	1.125	1.155	2.025	0.345	0.017	35000	550
NDS-6-30	1.125	1.155	2.025	0.285	0.02	23000	350
NDS-7-60	1.25	1.281	2.31	0.405	0.023	60000	1000
NDS-7-45	1.25	1.281	2.31	0.395	0.019	45000	750
NDS-7-30	1.25	1.281	2.31	0.325	0.023	30000	500
NDS-8-60	1.375	1.406	2.47	0.446	0.024	74000	1350
NDS-8-45	1.375	1.406	2.47	0.44	0.019	55000	1000
NDS-8-30	1.375	1.406	2.47	0.358	0.023	36000	680
NDS-9-60	1.2	1.531	2.68	0.513	0.024	89000	1600
NDS-9-45	1.2	1.531	2.68	0.503	0.025	79000	1500
NDS-9-30	1.2	1.531	2.68	0.4	0.024	44000	800
NDS-10-60	1.625	1.649	2.95	0.542	0.028	106000	2200
NDS-10-45	1.625	1.649	2.95	0.513	0.025	80000	1700
NDS-10-30	1.625	1.649	2.95	0.436	0.027	53000	1100
NDS-11-60	1.75	1.774	3.17	0.593	0.029	125000	3000
NDS-11-45	1.75	1.774	3.17	0.55	0.027	92000	2300
NDS-11-30	1.75	1.774	3.17	0.47	0.029	60000	1500
NDS-12-60	1.875	1.899	3.389	0.618	0.03	128000	4000
NDS-12-45	1.875	1.899	3.389	0.597	0.028	107000	3000
NDS-12-30	1.875	1.899	3.389	0.51	0.03	70000	2000
NDS-13-60	2	2.024	3.6	0.636	0.032	132000	4400
NDS-13-45	2	2.024	3.6	0.628	0.031	120000	3000
NDS-13-30	2	2.024	3.6	0.545	0.032	83000	2200
NDS-14-60	2.25	2.281	4.04	0.725	0.036	169000	6000
NDS-14-45	2.25	2.281	4.04	0.716	0.032	155000	5000
NDS-14-30	2.25	2.281	4.04	0.615	0.036	105000	4000
NDS-15-60	2.5	2.531	4.483	0.81	0.038	210000	9000
NDS-15-45	2.5	2.531	4.483	0.795	0.038	196000	6600
NDS-15-30	2.5	2.531	4.483	0.695	0.038	130000	4000
NDS-16-60	2.75	2.781	4.92	0.88	0.045	260000	12000
NDS-16-45	2.75	2.781	4.92	0.875	0.042	240000	9000
NDS-16-30	2.75	2.781	4.92	0.755	0.045	164000	6000
NDS-17-60	3	3.031	5.36	0.984	0.046	310000	15000
NDS-17-45	3	3.031	5.36	0.975	0.042	290000	12000
NDS-17-30	3	3.031	5.36	0.835	0.046	190000	8000

Tolerances

O.D.:	+ .000/- 1.5% x O.D. (Designed for standard flange spot face diameter)
I.D.:	- .000 / + 1.5% I.D.
Thickness:	± 5% x nominal thickness shown
Load:	± 20% of nominal shown


National Disc Spring H11/H13 steel flange disc springs are designed to meet specific bolt stress requirements:

Parts ending in	Bolt stressPSI
-60	60,000
-45	45,000
-30	30,000

All parts are heat treated with a plain finish

Loads for the NDS series have a tolerance of ± 20% of loads indicated

Springs For Ball Bearings

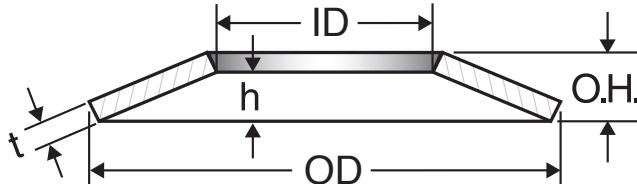

BB Series disc springs are specially designed as preloading springs for use with radial ball bearings. They help maintain positioning accuracy of the bearing with no end play. They also minimize vibration and shaft deflection. Proper preloading will increase bearing rigidity and eliminate excessive running noise.

Material

C1075 Steel

Rockwell hardness C40-51

Tolerances

Load: ± 20% of nominal shown

Springs for Ball Bearings

Century Stock Number	Ball Bearing Size	O.D.		I.D.		t	O.H.		Lbs.	Load @ .75 Defl.			
		Inches	mm	Inches	mm		Inches	mm		Inches	kg	mm	
BB-R-3	R-3	0.492	12.497	0.319	8.10	0.010	0.25	0.020	8.3	0.008	3.8	0.20	
BB-R-4	R-4	0.618	15.697	0.406	10.31	0.010	0.25	0.022	6.8	0.009	3.1	0.23	
BB-625	625, 634, EL-5	0.622	15.799	0.323	8.20	0.010	0.25	0.022	5.3	0.009	2.4	0.23	
BB-607	607, EL-7	0.740	18.796	0.402	10.21	0.014	0.36	0.028	11.8	0.010	5.4	0.25	
BB-626	626, 635, EL-6	0.740	18.796	0.362	9.19	0.012	0.30	0.026	7.2	0.010	3.3	0.25	
BB-608	608, 627, EL-8	0.858	21.793	0.484	12.29	0.014	0.36	0.030	10.7	0.012	4.9	0.30	
BB-R-6	R-6	0.862	21.895	0.539	13.69	0.014	0.36	0.030	11.8	0.012	5.4	0.30	
BB-6001	6001	1.091	27.711	0.681	17.30	0.016	0.41	0.039	18.4	0.018	8.3	0.46	
BB-6200	6200	1.169	29.693	0.685	17.40	0.016	0.41	0.043	19	0.021	8.6	0.53	
BB-6002	6002, 6201	1.248	31.699	0.803	20.40	0.016	0.41	0.043	18.6	0.021	8.4	0.53	
BB-R-10	R-10	1.358	34.493	1.000	25.40	0.020	0.51	0.047	34.8	0.021	15.8	0.53	
BB-6003	6003, 6202	1.362	34.595	0.882	22.40	0.020	0.51	0.047	27.3	0.021	12.4	0.53	
BB-6300	6300	1.362	34.595	0.803	20.40	0.016	0.41	0.043	14.1	0.021	6.4	0.53	
BB-6301	6301	1.441	36.601	0.803	20.40	0.020	0.51	0.051	25.5	0.024	11.6	0.61	
BB-6203	6203	1.559	39.599	1.004	25.50	0.020	0.51	0.051	25.3	0.024	11.5	0.61	
BB-6004	6004, 6302	1.638	41.605	1.004	25.50	0.020	0.51	0.055	26.1	0.027	11.8	0.69	
BB-6205	6205, 6304	2.028	51.511	1.398	35.51	0.024	0.61	0.059	31.1	0.027	14.1	0.69	
BB-6006	6006	2.146	54.508	1.594	40.49	0.024	0.61	0.059	32.5	0.027	14.7	0.69	
BB-6007	6007, 6206, 6305	2.421	61.493	1.594	40.49	0.028	0.71	0.071	40.3	0.033	18.3	0.84	
BB-6008	6008	2.657	67.488	1.988	50.50	0.028	0.71	0.067	37.1	0.030	16.8	0.76	
BB-6009	6009	2.933	74.498	2.185	55.50	0.032	0.81	0.075	48.5	0.033	22.0	0.84	
BB-6307	6307	3.130	79.502	1.988	50.50	0.032	0.81	0.091	52.2	0.045	23.7	1.14	
BB-6011	6011, 6210	3.524	89.510	2.579	65.51	0.035	0.89	0.098	76.9	0.048	34.9	1.22	
BB-6308	6308	3.524	89.510	2.382	60.50	0.035	0.89	0.098	65.9	0.047	29.9	1.19	
BB-6012	6012	3.720	94.488	2.972	75.49	0.039	0.99	0.087	74.8	0.036	33.9	0.91	
BB-6309	6309	3.898	99.009	2.579	65.51	0.039	0.99	0.102	67.1	0.047	30.4	1.19	
BB-6014	6014, 6212	4.291	108.991	2.972	75.49	0.049	1.24	0.106	91.1	0.043	41.3	1.09	
BB-6310	6310	4.291	108.991	2.776	70.51	0.049	1.24	0.106	81.7	0.043	37.1	1.09	
BB-6015	6015	4.488	113.995	3.563	90.50	0.049	1.24	0.097	91.4	0.036	41.5	0.91	
BB-6017	6017, 6215	5.079	129.007	3.760	95.50	0.049	1.24	0.126	114.7	0.058	52.0	1.47	
BB-6312	6312	5.079	129.007	3.366	85.50	0.049	1.24	0.126	92.7	0.058	42.0	1.47	
BB-6018	6018, 6216	5.472	138.989	3.976	100.99	0.049	1.24	0.128	98.4	0.059	44.6	1.50	
BB-6314	6314	5.866	148.996	3.760	95.50	0.059	1.50	0.126	86.8	0.050	39.4	1.27	
BB-6021	6021, 6218	6.260	159.004	4.370	111.00	0.059	1.50	0.138	109.2	0.059	49.5	1.50	
BB-6315	6315	6.260	159.004	3.976	100.99	0.059	1.50	0.138	94.3	0.059	42.8	1.50	
BB-6022	6022, 6219	6.654	169.012	4.764	121.01	0.059	1.50	0.150	125	0.068	56.7	1.73	
BB-6316	6316	6.654	169.012	4.370	111.00	0.059	1.50	0.150	107.5	0.068	48.8	1.73	
BB-6318	6318	7.441	189.001	4.764	121.01	0.079	2.01	0.169	173.3	0.068	78.6	1.73	
BB-6026	6026, 6222	7.795	197.993	5.551	141.00	0.079	2.01	0.177	211	0.074	95.7	1.88	
BB-6319	6319	7.795	197.993	5.157	130.99	0.079	2.01	0.177	4.50	0.185.5	0.074	84.1	1.88
BB-6224	6224, 6320	8.386	213.004	5.945	151.00	0.089	2.26	0.177	215.2	0.067	97.6	1.70	
BB-6030	6030, 6321	8.780	223.012	6.339	161.01	0.089	2.26	0.181	215.3	0.070	97.7	1.78	
BB-6226	6226	8.976	227.990	6.339	161.01	0.089	2.26	0.195	4.95	0.237	0.080	107.5	2.03
BB-6322	6322	9.370	237.998	6.339	161.01	0.089	2.26	0.207	5.26	0.233.4	0.089	105.9	2.26
BB-6228	6228	9.764	248.006	6.732	170.99	0.098	2.49	0.197	5.00	0.229.3	0.074	104.0	1.88
BB-6324	6324	10.157	257.988	6.732	170.99	0.098	2.49	0.217	5.51	0.252.5	0.089	114.5	2.26
BB-6230	6230	10.551	267.995	7.126	181.00	0.098	2.49	0.224	5.69	0.263.6	0.095	119.6	2.41
BB-6236	6236	10.945	278.003	7.126	181.00	0.098	2.49	0.236	5.99	0.263.5	0.104	119.5	2.64
BB-6232	6232	11.339	288.011	7.520	191.01	0.108	2.74	0.226	5.74	0.261.5	0.089	118.6	2.26
BB-6328	6328	11.732	297.993	7.520	191.01	0.108	2.74	0.250	6.35	0.298.6	0.107	135.4	2.72
BB-6234	6234	12.126	308.000	7.953	202.01	0.118	3.00	0.240	6.10	0.296.7	0.092	134.6	2.34
BB-6238	6238, 6332	13.307	337.998	9.134	232.00	0.118	3.00	0.260	6.60	0.322.5	0.107	146.3	2.72
BB-6240	6240, 6334	14.094	357.988	9.528	242.01	0.118	3.00	0.284	7.21	0.348.9	0.124	158.3	3.15



Contact Disc Springs

Contact Belleville Disc Springs combine two important features for improved bolt connections. Their conical shape provides reactive force and a high elasticity of spring return to compensate for developed looseness, loss of bolt tension due to applied surface deterioration, or movement due to the thermal expansion and contraction. The hardened, serrated profile "grips" the lower surface of the bolt

or nut to prevent the loss of tension that normally occurs during extreme vibration or severe shock.

Contact Springs come in sizes that correspond to a wide range of screw head sizes, including hex head socket screws. They can also be used in SEMS assemblies. Made of selected high-quality carbon spring steel.

Contact Disc Springs CONTACT REGULAR, NARROW AND WIDE


Century Stock Number	Bolt Diameter	Metric Size	Dimensions Inches				Calc Load @ Flat	Use
			Max. O.D.	Min. I.D.	Ref. t	Ref. O.H.		
CBS550301	-	3	0.224	0.122	0.024	0.037	700	N
CBS650311	-	3	0.315	0.122	0.024	0.039	400	R
CBS750312	-	4	0.402	0.122	0.024	0.047	360	W
CBS650411	#8	4	0.402	0.161	0.039	0.059	1480	R
CBS550501	#10	5	0.402	0.201	0.039	0.059	1700	N
CBS650511	#10	5	0.481	0.201	0.050	0.073	2420	R
CBS650601	-	6	0.481	0.240	0.050	0.071	2500	N
CBS650615	-	6	0.559	0.240	0.043	0.067	1210	R
CBS650635	0.250	6	0.559	0.254	0.052	0.087	3450	R
CBS550801	0.313	8	0.638	0.323	0.055	0.095	3800	N
CBS650821	0.313	8	0.717	0.323	0.055	0.095	2680	R
CBS650823	0.313	8	0.717	0.323	0.035	0.081	760	R
CBS551021	0.375	10	0.798	0.402	0.062	0.095	2700	N
CBS651022	0.375	10	0.877	0.402	0.062	0.108	3010	R
CBS551241	0.438	12	0.955	0.489	0.062	0.102	2300	N
CBS651201	0.438	12	1.074	0.489	0.078	0.120	3510	R
CBS651271	0.500	12	1.074	0.512	0.078	0.120	3600	R
CBS651442	0.563	14	1.192	0.567	0.098	0.138	5350	R
CBS651642	0.625	15	1.273	0.646	0.098	0.156	7460	R
CBS652002	0.750	20	1.570	0.781	0.118	0.185	9000	R

Regular (R): For general use

Narrow (N): Typical use: In the confined space under a socket head screw

Wide (W): Typical use: For oversized holes in sheet metal applications, making use of a wide bearing surface

Serrated Contact Disc Springs

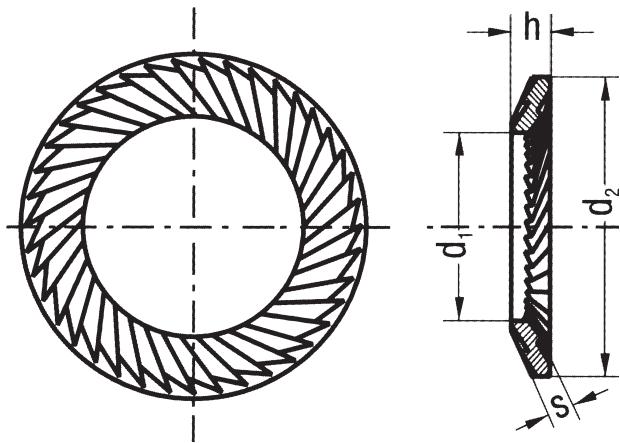

Serrated disc springs offer the following advantages to a designer:

- Locking effect at the outside diameter ensures the greatest resistance to loosening
- Positive locking serrations increases resistance to vibration
- Concentric application of force eliminates bending bolts
- Sliding surfaces allow tightening with no surface damage
- With proper transitional radius between bolt shaft and head there is no splitting when tightening
- Suitable for captive fitting on a wide range of bolts
- Minimizes stock with universal applications

Contact Disc Springs SERRATED LIGHT SERIES

Century Stock Number	Dimensions Inches				
	d ₁	d ₂	s	h Max.	h Min.
CCS116	0.067	0.126	0.024	0.024	0.016
CCS025	0.106	0.189	0.035	0.035	0.020
CCS035	0.146	0.236	0.035	0.035	0.022
CCS005	0.209	0.354	0.043	0.043	0.024
CCS006	0.252	0.394	0.047	0.047	0.028
CCS007	0.291	0.472	0.051	0.051	0.031
CCS008	0.331	0.512	0.055	0.055	0.031
CCS010	0.413	0.63	0.063	0.063	0.043
CCS012	0.512	0.709	0.067	0.067	0.045
CCS127	0.539	0.748	0.071	0.071	0.049
CCS016	0.669	0.945	0.083	0.083	0.061
CCS020	0.827	1.181	0.098	0.098	0.073
CCS024	1.008	1.417	0.114	0.114	0.085

Serrated

Very often disc springs are considered for use as safety washers for bolt connections to maintain a pre-load and prevent loosening. For this application, the sizes of normal disc springs do not match the screw and bolt sizes. **Century Spring** now offers special elements for this application.

Serrated Disc Springs

Serrated disc springs are a form of disc springs that are **serrated on both sides** of a trapezoid cross section. Because their diameters are matched to screw dimensions, the serrated disc springs can be used with practically any screw or bolt.

The outer diameter of the serrated disc spring will match up to the head diameter of pan head and hexagon socket head cap screws, including recessed heads.

Material

Spring steel	DIN 17222
Corrosion resistant steel	DIN 1.4301

Call for availability of stainless steel.

We offer two series to choose from depending on your application. O.D. and I.D. are the same for both series.

Light Series: suitable for normal duty, available for screw sizes: .063" to 1.417"


Reinforced Series: thicker, achieves higher pretension loads, available for screw sizes .197" to 1.181"

Contact Disc Springs SERRATED REINFORCED SERIES

Century Stock Number	Dimensions Inches				
	d ₁	d ₂	s	h Max.	h Min.
CVS005	0.209	0.354	.039	0.051	0.037
CVS006	.252	.394	.039	0.055	0.037
CVS008	0.331	0.512	.047	0.067	0.045
CVS010	0.413	0.63	.059	0.079	0.065
CVS014	0.591	0.866	.059	0.087	0.065
CVS020	0.827	1.181	.079	0.11	0.083
CVS022	0.906	1.299	.079	0.118	0.091
CVS027	1.126	1.535	.098	0.138	0.110
CVS030	1.244	1.772	.098	0.15	0.120



Curved Disc Springs

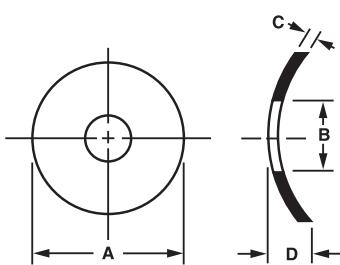

The cylindrically curved washer is well suited for applications requiring flexibility and light loads (from ounces up to about a hundred pounds) and repeated cycles through a range of motion. Of the cylindrically curved, wave and Belleville types, the cylindrically curved washer exhibits the most uniform spring constant over the widest range of deflection.

Spherically curved washers are frequently made as segments of spheres instead of segments of cylinders.

Although they are not true conical washers, they have approximately the same spring characteristics. However, the load capacity of spherically curved washers varies considerably when deflected near the flat position. The spherical shape tends to add a stiffening effect so that, in general, spherically curved washers will have slightly higher spring rates than comparable conical washers.

Parts available in spring steel; call for availability of stainless.

Tolerances

A = +.010"


C = Commercial

B = up to/including .10" +.005"
Over .10" +.010"

D = +.008"


Curved Disc Springs

Century Stock Number	Screw Size	B Inches mm	A Inches mm	D Inches mm	C Inches mm	Calc. Load @ App. Deflection Lbs. N	App. Deflection Inches mm
CRV-24419	#00	0.043 1.09	0.088 2.24	0.015 0.38	0.004 0.10	1.2 5.34	0.002 0.05
CRV-24421	#00	0.047 1.19	0.120 3.05	0.025 0.64	0.004 0.10	1.4 6.23	0.004 0.10
CRV-24423	#00	0.047 1.19	0.120 3.05	0.032 0.81	0.004 0.10	1.4 6.23	0.004 0.10
CRV-24425	#00	0.051 1.30	0.378 9.60	0.047 1.19	0.005 0.13	3.1 13.79	0.035 0.89
CRV-24427	#00	0.052 1.32	0.133 3.38	0.035 0.89	0.005 0.13	2.2 9.79	0.004 0.10
CRV-24429	#00	0.055 1.40	0.240 6.10	0.040 1.02	0.015 0.38	25.4 112.98	0.005 0.13
CRV-24431	#00	0.055 1.40	0.350 8.89	0.060 1.52	0.005 0.13	3.0 13.34	0.030 0.76
CRV-24435	#0	0.064 1.63	0.130 3.30	0.025 0.64	0.006 0.15	2.6 11.56	0.003 0.08
CRV-24439	#0	0.064 1.63	0.250 6.35	0.030 0.76	0.003 0.08	0.9 4.00	0.025 0.64
CRV-24441	#0	0.064 1.63	0.379 9.63	0.047 1.19	0.010 0.25	12.1 53.82	0.018 0.46
CRV-24445	#0	0.065 1.65	0.371 9.42	0.065 1.65	0.018 0.46	39.1 173.92	0.009 0.23
CRV-24449	#0	0.068 1.73	0.145 3.68	0.030 0.76	0.005 0.13	1.9 8.45	0.005 0.13
CRV-24451	#0	0.070 1.78	0.240 6.10	0.055 1.40	0.005 0.13	2.5 11.12	0.014 0.36
CRV-24453	#0	0.075 1.91	0.158 4.01	0.047 1.19	0.003 0.08	0.6 2.67	0.010 0.25
CRV-24461	#1	0.093 2.36	0.170 4.32	0.026 0.66	0.004 0.10	1.0 4.45	0.009 0.23
CRV-24467	#2	0.096 2.44	0.140 3.56	0.031 0.79	0.003 0.08	0.4 1.78	0.008 0.20
CRV-24469	#2	0.096 2.44	0.250 6.35	0.040 1.02	0.005 0.13	2.2 9.79	0.015 0.38
CRV-24471	#2	0.097 2.46	0.193 4.90	0.047 1.19	0.005 0.13	1.8 8.01	0.009 0.23
CRV-24473	#2	0.097 2.46	0.193 4.90	0.047 1.19	0.010 0.25	7.2 32.03	0.005 0.13
CRV-24479	#2	0.097 2.46	0.302 7.67	0.030 0.76	0.008 0.20	8.0 35.58	0.012 0.30
CRV-26100	3/32	0.100 2.54	0.215 5.46	0.028 0.71	0.005 0.13	1.5 6.67	0.013 0.33
CRV-24487	#2	0.100 2.54	0.625 15.88	0.090 2.29	0.010 0.25	12.3 54.71	0.048 1.22
CRV-24491	#3	0.109 2.77	0.203 5.16	0.032 0.81	0.005 0.13	1.6 7.12	0.010 0.25
CRV-24493	#3	0.109 2.77	0.250 6.35	0.062 1.57	0.005 0.13	2.0 8.90	0.015 0.38
CRV-24495	#3	0.112 2.84	0.220 5.59	0.025 0.64	0.003 0.08	0.6 2.67	0.020 0.51
CRV-24499	#3	0.112 2.84	0.273 6.93	0.047 1.19	0.005 0.13	2.1 9.34	0.018 0.46
CRV-24501	#3	0.112 2.84	0.375 9.53	0.090 2.29	0.005 0.13	2.5 11.12	0.034 0.86
CRV-24503	#3	0.112 2.84	0.437 11.10	0.090 2.29	0.005 0.13	2.7 12.01	0.047 1.19
CRV-24507	#4	0.118 3.00	0.203 5.16	0.032 0.81	0.005 0.13	1.5 6.67	0.010 0.25
CRV-24511	#4	0.122 3.10	0.377 9.58	0.060 1.52	0.007 0.18	4.8 21.35	0.025 0.64
CRV-24513	#4	0.122 3.10	0.378 9.60	0.047 1.19	0.008 0.20	6.3 28.02	0.022 0.56
CRV-24515	#4	0.125 3.18	0.247 6.27	0.062 1.57	0.003 0.08	0.6 2.67	0.025 0.64
CRV-24517	#4	0.125 3.18	0.247 6.27	0.062 1.57	0.005 0.13	1.8 8.01	0.015 0.38
CRV-24525	#4	0.126 3.20	0.213 5.41	0.035 0.89	0.005 0.13	1.4 6.23	0.011 0.28
CRV-24527	#4	0.127 3.23	0.176 4.47	0.032 0.81	0.010 0.25	4.0 17.79	0.004 0.10
CRV-24529	#4	0.127 3.23	0.213 5.41	0.018 0.46	0.005 0.13	1.4 6.23	0.011 0.28
CRV-24533	#4	0.128 3.25	0.198 5.03	0.040 1.02	0.008 0.20	3.3 14.68	0.006 0.15
CRV-24535	#4	0.128 3.25	0.230 5.84	0.047 1.19	0.008 0.20	4.1 18.24	0.008 0.20
CRV-24537	#4	0.128 3.25	0.240 6.10	0.041 1.04	0.005 0.13	1.7 7.56	0.014 0.36
CRV-24539	#4	0.128 3.25	0.240 6.10	0.041 1.04	0.008 0.20	4.3 19.13	0.009 0.23
CRV-24545	#5	0.130 3.30	0.219 5.56	0.032 0.81	0.007 0.18	2.9 12.90	0.008 0.20
CRV-24549	#5	0.130 3.30	0.468 11.89	0.060 1.52	0.005 0.13	2.6 11.56	0.054 1.37
CRV-24551	#5	0.130 3.30	0.687 17.45	0.060 1.52	0.010 0.25	10.3 45.81	0.05 1.27
CRV-24553	#5	0.132 3.35	0.503 12.78	0.078 1.98	0.010 0.25	10.8 48.04	0.031 0.79
CRV-24555	#5	0.133 3.38	0.285 7.24	0.062 1.57	0.006 0.15	2.8 12.45	0.017 0.43
CRV-24557	#5	0.134 3.40	0.437 11.10	0.094 2.39	0.010 0.25	10.1 44.92	0.023 0.58
CRV-24559	#5	0.135 3.43	0.245 6.22	0.032 0.81	0.006 0.15	2.3 10.23	0.012 0.30
CRV-26104	#5	0.135 3.43	0.245 6.22	0.049 1.24	0.004 0.10	1.0 4.45	0.023 0.58
CRV-24561	#5	0.135 3.43	0.285 7.24	0.062 1.57	0.006 0.15	2.7 12.01	0.017 0.43
CRV-26114	#5	0.135 3.43	0.307 7.80	0.034 0.86	0.009 0.23	6.0 26.69	0.014 0.36

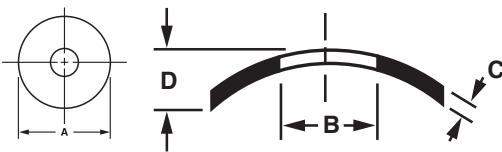


Curved Disc Springs

Century Stock Number	Screw Size	B Inches mm	A Inches mm	D Inches mm	C Inches mm	Calc. Load @ App. Deflection Lbs. N	App. Deflection Inches mm
CRV-24563	#5	0.136 3.45	0.312 7.92	0.062 1.57	0.006 0.15	2.9 12.90	0.020 0.51
CRV-24567	#5	0.136 3.45	0.370 9.40	0.035 0.89	0.008 0.20	5.9 26.24	0.021 0.53
CRV-24569	#5	0.136 3.45	0.400 10.16	0.065 1.65	0.010 0.25	9.6 42.70	0.020 0.51
CRV-24571	#5	0.137 3.48	0.250 6.35	0.020 0.51	0.005 0.13	1.6 7.12	0.015 0.38
CRV-24573	#5	0.137 3.48	0.253 6.43	0.047 1.19	0.005 0.13	1.6 7.12	0.016 0.41
CRV-24575	#5	0.137 3.48	0.283 7.19	0.047 1.19	0.008 0.20	4.8 21.35	0.012 0.30
CRV-24577	#5	0.137 3.48	0.283 7.19	0.062 1.57	0.005 0.13	1.8 8.01	0.020 0.51
CRV-24579	#5	0.137 3.48	0.283 7.19	0.062 1.57	0.010 0.25	7.5 33.36	0.010 0.25
CRV-24581	#5	0.139 3.53	0.317 8.05	0.062 1.57	0.010 0.25	8.2 36.47	0.012 0.30
CRV-24583	#6	0.140 3.56	0.365 9.27	0.065 1.65	0.005 0.13	2.2 9.79	0.033 0.84
CRV-24585	#6	0.140 3.56	0.406 10.31	0.060 1.52	0.005 0.13	2.4 10.68	0.040 1.02
CRV-24587	#6	0.140 3.56	0.490 12.45	0.080 2.03	0.020 0.51	41.9 186.37	0.015 0.38
CRV-24589	#6	0.140 3.56	0.562 14.27	0.060 1.52	0.012 0.30	15.8 70.28	0.032 0.81
CRV-24591	#6	0.141 3.58	0.213 5.41	0.048 1.22	0.008 0.20	3.1 13.79	0.007 0.18
CRV-24593	#6	0.141 3.58	0.281 7.14	0.047 1.19	0.008 0.20	4.6 20.46	0.012 0.30
CRV-24595	#6	0.141 3.58	0.373 9.47	0.062 1.57	0.010 0.25	9.1 40.48	0.017 0.43
CRV-24597	#6	0.141 3.58	0.467 11.86	0.058 1.47	0.010 0.25	10.2 45.37	0.027 0.69
CRV-24599	#6	0.144 3.66	0.312 7.92	0.047 1.19	0.016 0.41	20.2 89.85	0.007 0.18
CRV-24601	#6	0.144 3.66	0.312 7.92	0.048 1.22	0.016 0.41	20.2 89.85	0.007 0.18
CRV-24603	#6	0.145 3.68	0.312 7.92	0.030 0.76	0.003 0.08	0.4 1.78	0.027 0.69
CRV-24605	#6	0.145 3.68	0.490 12.45	0.080 2.03	0.005 0.13	2.5 11.12	0.059 1.50
CRV-24607	#6	0.147 3.73	0.640 16.26	0.062 1.57	0.005 0.13	1.6 7.12	0.057 1.45
CRV-24611	#6	0.149 3.78	0.277 7.04	0.060 1.52	0.004 0.10	1.0 4.45	0.023 0.58
CRV-24615	#6	0.149 3.78	0.322 8.18	0.030 0.76	0.010 0.25	7.8 34.69	0.013 0.33
CRV-24617	#6	0.150 3.81	0.240 6.10	0.045 1.14	0.010 0.25	5.5 24.46	0.007 0.18
CRV-24623	#6	0.157 3.99	0.381 9.68	0.062 1.57	0.010 0.25	8.6 38.25	0.018 0.46
CRV-24625	#6	0.159 4.04	0.562 14.27	0.070 1.78	0.015 0.38	23.6 104.97	0.026 0.66
CRV-24627	#6	0.161 4.09	0.249 6.32	0.047 1.19	0.005 0.13	1.2 5.34	0.015 0.38
CRV-24629	#6	0.161 4.09	0.249 6.32	0.047 1.19	0.007 0.18	2.5 11.12	0.011 0.28
CRV-24631	#6	0.161 4.09	0.249 6.32	0.047 1.19	0.010 0.25	5.1 22.68	0.008 0.20
CRV-24633	#6	0.161 4.09	0.301 7.65	0.047 1.19	0.005 0.13	1.7 7.56	0.022 0.56
CRV-24637	#8	0.166 4.22	0.270 6.86	0.030 0.76	0.008 0.20	3.6 16.01	0.011 0.28
CRV-24639	#8	0.168 4.27	0.280 7.11	0.046 1.17	0.010 0.25	5.8 25.80	0.010 0.25
CRV-24641	#8	0.169 4.29	0.312 7.92	0.030 0.76	0.005 0.13	1.6 7.12	0.024 0.61
CRV-24643	#8	0.169 4.29	0.437 11.10	0.060 1.52	0.005 0.13	2.2 9.79	0.047 1.19
CRV-24645	#8	0.169 4.29	0.517 13.13	0.090 2.29	0.010 0.25	9.8 43.59	0.033 0.84
CRV-24649	#8	0.170 4.32	0.405 10.29	0.062 1.57	0.010 0.25	8.5 37.81	0.020 0.51
CRV-24651	#8	0.172 4.37	0.241 6.12	0.040 1.02	0.006 0.15	1.5 6.67	0.012 0.30
CRV-24655	#8	0.172 4.37	0.344 8.74	0.050 1.27	0.006 0.15	2.6 11.56	0.024 0.61
CRV-24657	#8	0.172 4.37	0.365 9.27	0.065 1.65	0.005 0.13	1.9 8.45	0.033 0.84
CRV-24659	#8	0.172 4.37	0.562 14.27	0.070 1.78	0.015 0.38	22.9 101.86	0.026 0.66
CRV-24661	#8	0.173 4.39	0.625 15.88	0.030 0.76	0.015 0.38	11.2 49.82	0.015 0.38
CRV-24663	#8	0.174 4.42	0.250 6.35	0.040 1.02	0.015 0.38	10.0 44.48	0.005 0.13
CRV-26128	#8	0.174 4.42	0.370 9.40	0.039 0.99	0.011 0.28	9.0 40.03	0.015 0.38
CRV-24667	#8	0.174 4.42	0.400 10.16	0.030 0.76	0.006 0.15	2.1 9.34	0.024 0.61
CRV-24669	#8	0.177 4.50	0.993 25.22	0.062 1.57	0.010 0.25	5.2 23.13	0.052 1.32
CRV-24671	#8	0.178 4.52	0.375 9.53	0.090 2.29	0.010 0.25	7.7 34.25	0.017 0.43
CRV-24677	#8	0.187 4.75	0.440 11.18	0.030 0.76	0.010 0.25	7.1 31.58	0.020 0.51
CRV-24679	#8	0.187 4.75	0.440 11.18	0.062 1.57	0.010 0.25	8.4 37.36	0.024 0.61
CRV-24681	#8	0.187 4.75	0.562 14.27	0.078 1.98	0.008 0.20	6.2 27.58	0.048 1.22
CRV-24693	#8	0.188 4.78	0.314 7.98	0.047 1.19	0.005 0.13	9.0 40.03	0.031 0.79
CRV-24685	#8	0.188 4.78	0.375 9.53	0.040 1.02	0.008 0.20	4.6 20.46	0.021 0.53
CRV-24687	#8	0.189 4.80	0.312 7.92	0.062 1.57	0.004 0.10	0.9 4.00	0.030 0.76
CRV-24689	#8	0.189 4.80	0.343 8.71	0.030 0.76	0.010 0.25	6.5 28.91	0.014 0.36
CRV-24691	#8	0.190 4.83	0.375 9.53	0.050 1.27	0.005 0.13	1.8 8.01	0.034 0.86
CRV-24695	#8	0.193 4.90	0.375 9.53	0.066 1.68	0.006 0.15	1.1 4.89	0.043 1.09
CRV-24697	#8	0.193 4.90	0.437 11.10	0.065 1.65	0.008 0.20	5.2 23.13	0.029 0.74
CRV-24701	#10	0.194 4.93	0.375 9.53	0.070 1.78	0.006 0.15	2.5 11.12	0.029 0.74
CRV-24703	#10	0.194 4.93	0.630 16.00	0.090 2.29	0.020 0.51	40.6 180.59	0.024 0.61
CRV-24705	#10	0.195 4.95	0.277 7.04	0.060 1.52	0.005 0.13	1.0 4.45	0.019 0.48
CRV-24707	#10	0.195 4.95	0.312 7.92	0.030 0.76	0.010 0.25	5.5 24.46	0.012 0.30
CRV-24711	#10	0.195 4.95	0.490 12.45	0.030 0.76	0.010 0.25	6.0 26.69	0.020 0.51
CRV-24713	#10	0.195 4.95	0.562 14.27	0.070 1.78	0.008 0.20	6.1 27.13	0.048 1.22
CRV-24717	#10	0.198 5.03	0.442 11.23	0.062 1.57	0.010 0.25	8.0 35.58	0.024 0.61
CRV-24719	#10	0.199 5.05	0.375 9.53	0.041 1.04	0.010 0.25	6.8 30.25	0.017 0.43
CRV-24721	#10	0.199 5.05	0.443 11.25	0.055 1.40	0.005 0.13	2.0 8.90	0.048 1.22
CRV-24723	#10	0.200 5.08	0.302 7.67	0.045 1.14	0.005 0.13	1.2 5.34	0.022 0.56
CRV-26134	#10	0.200 5.08	0.423 10.74	0.047 1.19	0.011 0.28	9.0 40.03	0.020 0.51
CRV-26136	#10	0.200 5.08	0.423 10.74	0.043 1.09	0.014 0.36	13.5 60.05	0.016 0.41
CRV-24725	#10	0.200 5.08	0.430 10.92	0.070 1.78	0.010 0.25	7.8 34.69	0.023 0.58
CRV-24727	#10	0.200 5.08	0.990 25.15	0.062 1.57	0.010 0.25	5.0 22.24	0.052 1.32
CRV-24729	#10	0.201 5.11	0.300 7.62	0.050 1.27	0.010 0.25	4.8 21.35	0.011 0.28
CRV-24731	#10	0.201 5.11	0.374 9.50	0.065 1.65	0.005 0.13	1.6 7.12	0.034 0.86
CRV-24733	#10	0.202 5.13	0.312 7.92	0.062 1.57	0.010 0.25	5.1 22.68	0.012 0.30
CRV-24735	#10	0.202 5.13	0.505 12.83	0.062 1.57	0.005 0.13	2.0 8.90	0.057 1.45

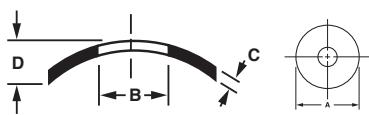

Curved Disc Springs


Century Stock Number	Screw Size	B Inches mm	A Inches mm	D Inches mm	C Inches mm	Calc. Load @ App. Deflection Lbs. N	App. Deflection Inches mm
CRV-24739	#10	0.203 5.16	0.365 9.27	0.032 0.81	0.005 0.13	1.3 5.78	0.027 0.69
CRV-25100	#10	0.203 5.16	0.375 9.53	0.062 1.57	0.005 0.13	1.6 7.12	0.034 0.86
CRV-25102	#10	0.203 5.16	0.375 9.53	0.062 1.57	0.010 0.25	6.7 29.80	0.017 0.43
CRV-25104	#10	0.203 5.16	0.406 10.31	0.047 1.19	0.005 0.13	1.8 8.01	0.040 1.02
CRV-25106	#10	0.203 5.16	0.438 11.13	0.070 1.78	0.010 0.25	7.8 34.69	0.023 0.58
CRV-25112	#10	0.204 5.18	0.438 11.13	0.070 1.78	0.010 0.25	7.8 34.69	0.023 0.58
CRV-25116	#10	0.204 5.18	0.640 16.26	0.045 1.14	0.005 0.13	0.9 4.00	0.040 1.02
CRV-25120	#10	0.205 5.21	0.500 12.70	0.080 2.03	0.015 0.38	19.4 86.29	0.020 0.51
CRV-25122	#10	0.205 5.21	1.010 25.65	0.085 2.16	0.063 1.60	463.9 2063.43	0.020 0.51
CRV-25126	#12	0.220 5.59	0.406 10.31	0.060 1.52	0.005 0.13	1.6 7.12	0.040 1.02
CRV-25128	#12	0.220 5.59	0.740 18.80	0.130 3.30	0.010 0.25	10.3 45.81	0.067 1.70
CRV-25130	#12	0.228 5.79	0.375 9.53	0.041 1.04	0.010 0.25	5.7 25.35	0.017 0.43
CRV-25132	#12	0.228 5.79	0.468 11.89	0.125 3.18	0.016 0.41	19.2 85.40	0.017 0.43
CRV-25134	#12	0.231 5.87	0.423 10.74	0.050 1.27	0.010 0.25	6.6 29.36	0.022 0.56
CRV-26144	#12	0.231 5.87	0.490 12.45	0.057 1.45	0.012 0.30	10.0 44.48	0.025 0.64
CRV-26146	#12	0.231 5.87	0.490 12.45	0.050 1.27	0.015 0.38	15.0 66.72	0.018 0.46
CRV-25136	#12	0.234 5.94	0.438 11.13	0.077 1.96	0.010 0.25	6.8 30.25	0.023 0.58
CRV-25138	#12	0.234 5.94	0.630 16.00	0.062 1.57	0.012 0.30	13.2 58.71	0.040 1.02
CRV-25140	#12	0.235 5.97	0.325 8.26	0.047 1.19	0.010 0.25	4.0 17.79	0.013 0.33
CRV-25142	#12	0.235 5.97	0.410 10.41	0.062 1.57	0.010 0.25	6.2 27.58	0.021 0.53
CRV-25144	#12	0.239 6.07	0.438 11.13	0.095 2.41	0.010 0.25	6.6 29.36	0.023 0.58
CRV-25146	#12	0.239 6.07	0.500 12.70	0.050 1.27	0.015 0.38	17.2 76.51	0.020 0.51
CRV-25148	#12	0.239 6.07	0.625 15.88	0.100 2.54	0.015 0.38	20.3 90.29	0.032 0.81
CRV-25150	#14	0.250 6.35	0.437 11.10	0.047 1.19	0.010 0.25	6.2 27.58	0.023 0.58
CRV-25152	#14	0.250 6.35	0.437 11.10	0.090 2.29	0.010 0.25	6.2 27.58	0.023 0.58
CRV-25154	#14	0.250 6.35	0.495 12.57	0.125 3.18	0.007 0.18	3.5 15.57	0.043 1.09
CRV-25156	#14	0.250 6.35	0.500 12.70	0.078 1.98	0.006 0.15	2.6 11.56	0.051 1.30
CRV-25158	#14	0.250 6.35	0.562 14.27	0.078 1.98	0.020 0.51	32.5 144.56	0.019 0.48
CRV-25160	#14	0.250 6.35	0.625 15.88	0.078 1.98	0.020 0.51	35.2 156.57	0.024 0.61
CRV-25162	#14	0.251 6.38	0.562 14.27	0.037 0.94	0.007 0.18	2.1 9.34	0.030 0.76
CRV-25164	#14	0.251 6.38	0.750 19.05	0.070 1.78	0.030 0.76	87.8 390.53	0.023 0.58
CRV-25166	#14	0.252 6.40	1.065 27.05	0.093 2.36	0.015 0.38	21.2 94.30	0.078 1.98
CRV-25168	1/4	0.253 6.43	0.406 10.31	0.030 0.76	0.005 0.13	0.8 3.56	0.025 0.64
CRV-25170	1/4	0.253 6.43	0.469 11.91	0.047 1.19	0.010 0.25	6.7 29.80	0.027 0.69
CRV-25172	1/4	0.254 6.45	0.497 12.62	0.100 2.54	0.006 0.15	2.5 11.12	0.050 1.27
CRV-25174	1/4	0.254 6.45	0.497 12.62	0.100 2.54	0.010 0.25	7.1 31.58	0.030 0.76
CRV-25176	1/4	0.255 6.48	0.750 19.05	0.093 2.36	0.012 0.30	13.9 61.83	0.057 1.45
CRV-25178	1/4	0.256 6.50	0.406 10.31	0.032 0.81	0.006 0.15	1.5 6.67	0.026 0.66
CRV-25180	1/4	0.257 6.53	0.438 11.13	0.040 1.02	0.005 0.13	1.1 4.89	0.035 0.89
CRV-25182	1/4	0.257 6.53	0.438 11.13	0.047 1.19	0.015 0.38	13.6 60.49	0.016 0.41
CRV-25186	1/4	0.259 6.58	0.406 10.31	0.062 1.57	0.018 0.46	17.2 76.51	0.011 0.28
CRV-25188	1/4	0.259 6.58	0.562 14.27	0.080 2.03	0.018 0.46	25.6 113.87	0.021 0.53
CRV-25190	1/4	0.259 6.58	0.691 17.55	0.070 1.78	0.006 0.15	2.1 9.34	0.064 1.63
CRV-25194	1/4	0.260 6.60	0.508 12.90	0.055 1.40	0.015 0.38	16.1 71.61	0.021 0.53
CRV-25198	1/4	0.261 6.63	0.875 22.23	0.060 1.52	0.030 0.76	89.0 395.87	0.030 0.76
CRV-25204	1/4	0.262 6.65	0.438 11.13	0.050 1.27	0.010 0.25	5.8 25.80	0.023 0.58
CRV-25206	1/4	0.262 6.65	0.562 14.27	0.060 1.52	0.008 0.20	5.0 22.24	0.048 1.22
CRV-25208	1/4	0.263 6.68	0.433 11.00	0.047 1.19	0.005 0.13	1.3 5.78	0.042 1.07
CRV-25210	1/4	0.263 6.68	0.433 11.00	0.047 1.19	0.008 0.20	3.6 16.01	0.029 0.74
CRV-25212	1/4	0.263 6.68	0.433 11.00	0.047 1.19	0.015 0.38	12.9 57.38	0.015 0.38
CRV-25214	1/4	0.263 6.68	0.437 11.10	0.062 1.57	0.005 0.13	1.4 6.23	0.047 1.19
CRV-25216	1/4	0.263 6.68	0.437 11.10	0.062 1.57	0.008 0.20	3.7 16.46	0.029 0.74
CRV-25218	1/4	0.263 6.68	0.437 11.10	0.062 1.57	0.012 0.30	8.4 37.36	0.019 0.48
CRV-25224	1/4	0.265 6.73	0.490 12.45	0.092 2.34	0.008 0.20	4.3 19.13	0.037 0.94
CRV-26148	1/4	0.265 6.73	0.490 12.45	0.063 1.60	0.011 0.28	7.0 31.14	0.029 0.74
CRV-25228	1/4	0.265 6.73	0.508 12.90	0.093 2.36	0.010 0.25	7.0 31.14	0.032 0.81
CRV-25230	1/4	0.265 6.73	0.508 12.90	0.093 2.36	0.015 0.38	15.7 69.83	0.021 0.53
CRV-25232	1/4	0.265 6.73	0.508 12.90	0.093 2.36	0.028 0.71	59.0 262.43	0.011 0.28
CRV-26150	1/4	0.265 6.73	0.551 14.00	0.060 1.52	0.015 0.38	14.0 62.27	0.026 0.66
CRV-26152	1/4	0.265 6.73	0.551 14.00	0.052 1.32	0.019 0.48	21.0 93.41	0.018 0.46
CRV-25234	1/4	0.265 6.73	0.552 14.02	0.075 1.91	0.008 0.20	4.8 21.35	0.047 1.19
CRV-25236	1/4	0.265 6.73	0.562 14.27	0.125 3.18	0.025 0.64	48.4 215.28	0.015 0.38
CRV-25238	1/4	0.265 6.73	0.625 15.88	0.075 1.91	0.015 0.38	19.0 84.51	0.032 0.81
CRV-26154	1/4	0.269 6.83	0.423 10.74	0.070 1.78	0.007 0.18	1.8 8.01	0.033 0.84
CRV-25240	1/4	0.269 6.83	0.435 11.05	0.068 1.73	0.010 0.25	5.5 24.46	0.023 0.58
CRV-25242	1/4	0.270 6.86	0.380 9.65	0.060 1.52	0.010 0.25	4.2 18.68	0.018 0.46
CRV-25244	1/4	0.270 6.86	0.500 12.70	0.060 1.52	0.010 0.25	6.7 29.80	0.031 0.79
CRV-25246	1/4	0.270 6.86	0.500 12.70	0.060 1.52	0.020 0.51	26.9 119.65	0.015 0.38
CRV-25248	1/4	0.272 6.91	0.496 12.60	0.060 1.52	0.010 0.25	6.6 29.36	0.030 0.76
CRV-25250	1/4	0.275 6.99	0.599 15.21	0.055 1.40	0.010 0.25	7.9 35.14	0.044 1.12
CRV-25254	1/4	0.280 7.11	0.375 9.53	0.030 0.76	0.005 0.13	0.6 2.67	0.025 0.64
CRV-25256	1/4	0.280 7.11	0.500 12.70	0.090 2.29	0.010 0.25	6.4 28.47	0.031 0.79
CRV-25258	1/4	0.280 7.11	0.552 14.02	0.075 1.91	0.015 0.38	16.2 72.06	0.025 0.64
CRV-25260	1/4	0.280 7.11	0.625 15.88	0.093 2.36	0.006 0.15	2.9 12.90	0.080 2.03

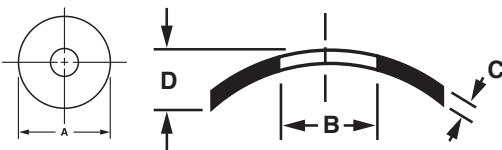

Curved Disc Springs

Century Stock Number	Screw Size	B Inches mm	A Inches mm	D Inches mm	C Inches mm	Calc. Load @ App. Deflection Lbs. N	App. Deflection Inches mm
CRV-25262	1/4	0.280 7.11	0.625 15.88	0.093 2.36	0.008 0.20	5.1 22.68	0.060 1.52
CRV-25266	1/4	0.280 7.11	0.625 15.88	0.093 2.36	0.012 0.30	11.6 51.60	0.040 1.02
CRV-25268	1/4	0.280 7.11	0.625 15.88	0.093 2.36	0.015 0.38	18.2 80.95	0.032 0.81
CRV-25270	1/4	0.280 7.11	0.625 15.88	0.093 2.36	0.020 0.51	32.3 143.67	0.024 0.61
CRV-25276	1/4	0.296 7.52	0.551 14.00	0.085 2.16	0.010 0.25	6.7 29.80	0.037 0.94
CRV-26160	9/32	0.296 7.52	0.551 14.00	0.070 1.78	0.012 0.30	8.0 35.58	0.032 0.81
CRV-25278	1/4	0.301 7.65	0.671 17.04	0.093 2.36	0.012 0.30	11.6 51.60	0.046 1.17
CRV-25280	1/4	0.312 7.92	0.562 14.27	0.093 2.36	0.020 0.51	26.0 115.65	0.019 0.48
CRV-25282	1/4	0.315 8.00	0.500 12.70	0.060 1.52	0.010 0.25	5.4 24.02	0.031 0.79
CRV-25284	1/4	0.315 8.00	0.625 15.88	0.062 1.57	0.010 0.25	7.2 32.03	0.048 1.22
CRV-25286	5/16	0.315 8.00	0.625 15.88	0.095 2.41	0.010 0.25	7.2 32.03	0.048 1.22
CRV-25290	5/16	0.316 8.03	0.625 15.88	0.098 2.49	0.020 0.51	29.0 128.99	0.024 0.61
CRV-25292	5/16	0.319 8.10	0.500 12.70	0.075 1.91	0.015 0.38	11.9 52.93	0.020 0.51
CRV-25294	5/16	0.320 8.13	0.625 15.88	0.080 2.03	0.012 0.30	10.3 45.81	0.040 1.02
CRV-25296	5/16	0.320 8.13	0.688 17.48	0.080 2.03	0.010 0.25	7.8 34.69	0.058 1.47
CRV-25298	5/16	0.323 8.20	0.415 10.54	0.062 1.57	0.003 0.08	0.2 0.89	0.059 1.50
CRV-25300	5/16	0.323 8.20	0.415 10.54	0.062 1.57	0.008 0.20	2.0 8.90	0.026 0.66
CRV-25304	5/16	0.326 8.28	0.490 12.45	0.062 1.57	0.010 0.25	4.9 21.80	0.029 0.74
CRV-25306	5/16	0.326 8.28	1.000 25.40	0.093 2.36	0.050 1.27	247.1 1099.10	0.024 0.61
CRV-26164	5/16	0.327 8.31	0.612 15.54	0.077 1.96	0.013 0.33	9.0 40.03	0.035 0.89
CRV-25308	5/16	0.327 8.31	0.620 15.75	0.085 2.16	0.010 0.25	6.9 30.69	0.047 1.19
CRV-26166	5/16	0.327 8.31	0.735 18.67	0.076 1.93	0.017 0.43	15.0 66.72	0.030 0.76
CRV-26168	5/16	0.327 8.31	0.735 18.67	0.070 1.78	0.021 0.53	22.5 100.08	0.025 0.64
CRV-25310	5/16	0.328 8.33	0.500 12.70	0.080 2.03	0.008 0.20	3.2 14.23	0.038 0.97
CRV-25314	5/16	0.328 8.33	0.562 14.27	0.125 3.18	0.025 0.64	38.1 169.47	0.015 0.38
CRV-25318	5/16	0.330 8.38	0.875 22.23	0.040 1.02	0.010 0.25	2.9 12.90	0.030 0.76
CRV-26170	5/16	0.331 8.41	0.490 12.45	0.077 1.96	0.008 0.20	2.3 10.23	0.036 0.91
CRV-26172	5/16	0.331 8.41	0.490 12.45	0.062 1.57	0.011 0.28	4.5 20.02	0.027 0.69
CRV-25320	5/16	0.331 8.41	0.622 15.80	0.093 2.36	0.006 0.15	2.4 10.68	0.079 2.01
CRV-25322	5/16	0.331 8.41	0.622 15.80	0.093 2.36	0.012 0.30	9.8 43.59	0.039 0.99
CRV-25324	5/16	0.331 8.41	0.622 15.80	0.093 2.36	0.015 0.38	15.4 68.50	0.032 0.81
CRV-25326	5/16	0.331 8.41	0.622 15.80	0.093 2.36	0.025 0.64	42.8 190.37	0.019 0.48
CRV-25328	5/16	0.346 8.79	0.761 19.33	0.187 4.75	0.020 0.51	31.9 141.89	0.035 0.89
CRV-25330	5/16	0.363 9.22	0.672 17.07	0.080 2.03	0.015 0.38	15.1 67.16	0.037 0.94
CRV-26176	11/32	0.363 9.22	0.672 17.07	0.081 2.06	0.015 0.38	11.0 48.93	0.034 0.86
CRV-25332	5/16	0.375 9.53	0.600 15.24	0.070 1.78	0.025 0.64	34.3 152.57	0.018 0.46
CRV-25338	5/16	0.377 9.58	0.465 11.81	0.093 2.36	0.006 0.15	0.9 4.00	0.044 1.12
CRV-25340	5/16	0.378 9.60	0.685 17.40	0.100 2.54	0.005 0.13	1.3 5.78	0.095 2.41
CRV-25344	5/16	0.379 9.63	0.563 14.30	0.080 2.03	0.010 0.25	4.7 20.91	0.039 0.99
CRV-25346	5/16	0.379 9.63	0.563 14.30	0.080 2.03	0.020 0.51	19.1 84.96	0.019 0.48
CRV-25348	5/16	0.379 9.63	0.686 17.42	0.093 2.36	0.010 0.25	6.5 28.91	0.058 1.47
CRV-25352	3/8	0.383 9.73	0.691 17.55	0.070 1.78	0.008 0.20	3.5 15.57	0.062 1.57
CRV-25356	3/8	0.390 9.91	0.553 14.05	0.075 1.91	0.006 0.15	1.5 6.67	0.062 1.57
CRV-25358	3/8	0.390 9.91	0.740 18.80	0.140 3.56	0.010 0.25	6.9 30.69	0.067 1.70
CRV-25360	3/8	0.390 9.91	0.740 18.80	0.140 3.56	0.020 0.51	27.7 123.21	0.033 0.84
CRV-26178	3/8	0.395 10.03	0.735 18.67	0.129 3.28	0.011 0.28	6.0 26.69	0.056 1.42
CRV-26180	3/8	0.395 10.03	0.735 18.67	0.086 2.18	0.016 0.41	12.0 53.38	0.036 0.91
CRV-25364	3/8	0.400 10.16	0.600 15.24	0.093 2.36	0.012 0.30	7.0 31.14	0.037 0.94
CRV-26184	3/8	0.400 10.16	0.612 15.54	0.074 1.88	0.013 0.33	6.0 26.69	0.031 0.79
CRV-26188	3/8	0.400 10.16	0.672 17.07	0.079 2.01	0.015 0.38	9.0 40.03	0.033 0.84
CRV-25368	3/8	0.438 11.13	0.740 18.80	0.140 3.56	0.015 0.38	13.4 59.60	0.045 1.14
CRV-25372	7/16	0.455 11.56	0.740 18.80	0.140 3.56	0.010 0.25	5.6 24.91	0.067 1.70
CRV-25374	7/16	0.468 11.89	0.686 17.42	0.130 3.30	0.005 0.13	1.1 4.89	0.115 2.92
CRV-25376	7/16	0.470 11.94	0.870 22.10	0.116 2.95	0.010 0.25	6.7 29.80	0.093 2.36
CRV-25378	7/16	0.474 12.04	0.709 18.01	0.115 2.92	0.015 0.38	10.9 48.48	0.041 1.04
CRV-25382	7/16	0.502 12.75	1.003 25.48	0.093 2.36	0.012 0.30	8.3 36.92	0.081 2.06
CRV-25384	1/2	0.504 12.80	0.938 23.83	0.100 2.54	0.032 0.81	69.4 308.69	0.034 0.86
CRV-25388	1/2	0.505 12.83	0.740 18.80	0.130 3.30	0.015 0.38	10.4 46.26	0.045 1.14
CRV-25390	1/2	0.505 12.83	0.815 20.70	0.093 2.36	0.029 0.74	46.9 208.61	0.028 0.71
CRV-25394	1/2	0.514 13.06	0.874 22.20	0.032 0.81	0.020 0.51	6.2 27.58	0.012 0.30
CRV-25398	1/2	0.516 13.11	0.744 18.90	0.093 2.36	0.010 0.25	4.4 19.57	0.068 1.73
CRV-25402	1/2	0.520 13.21	0.870 22.10	0.109 2.77	0.010 0.25	5.9 26.24	0.093 2.36
CRV-25408	1/2	0.537 13.64	0.753 19.13	0.093 2.36	0.012 0.30	6.0 26.69	0.058 1.47
CRV-25410	1/2	0.585 14.86	0.875 22.23	0.135 3.43	0.010 0.25	4.8 21.35	0.094 2.39
CRV-25412	1/2	0.600 15.24	0.850 21.59	0.080 2.03	0.020 0.51	17.2 76.51	0.044 1.12
CRV-25414	1/2	0.614 15.60	0.880 22.35	0.062 1.57	0.020 0.51	15.7 69.83	0.042 1.07
CRV-25418	5/8	0.640 16.26	0.875 22.23	0.060 1.52	0.010 0.25	2.1 9.34	0.050 1.27
CRV-25420	5/8	0.640 16.26	1.000 25.40	0.100 2.54	0.030 0.76	47.5 211.28	0.041 1.04
CRV-25422	5/8	0.658 16.71	1.750 44.45	0.219 5.56	0.020 0.51	36.6 162.80	0.187 4.75
CRV-26216	5/8	0.663 16.84	0.980 24.89	0.118 3.00	0.021 0.53	14.0 62.27	0.051 1.30
CRV-25424	5/8	0.665 16.89	0.980 24.89	0.100 2.54	0.020 0.51	18.8 83.62	0.059 1.50
CRV-25426	5/8	0.720 18.29	1.000 25.40	0.150 3.81	0.015 0.38	9.2 40.92	0.081 2.06
CRV-25428	3/4	0.765 19.43	0.910 23.11	0.100 2.54	0.020 0.51	9.3 41.37	0.051 1.30

Wave Disc Springs

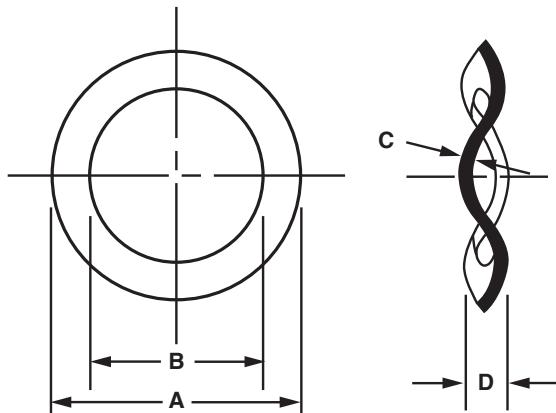

Wave Disc Springs

Century Stock Number	B Inches mm	A Inches mm	D Inches mm	C Inches mm	No of Waves	App. Max. Load. Lbs. N	App. Defl. Inches mm
WAV-24981	0.093 2.36	0.205 5.21	0.03 0.76	0.004 0.1	3	2.445 10.88	0.004 0.1
WAV-24983	0.096 2.44	0.187 4.75	0.025 0.64	0.005 0.13	3	7 31.14	0.003 0.08
WAV-24985	0.096 2.44	0.25 6.35	0.03 0.76	0.004 0.1	3	-	0.005 0.13
WAV-24987	0.098 2.49	0.152 3.86	0.032 0.81	0.005 0.13	3	4 17.79	0.002 0.05
WAV-24989	0.11 2.79	0.196 4.98	0.033 0.84	0.012 0.3	3	33.7 149.9	0.001 0.03
WAV-24991	0.11 2.79	0.25 6.35	0.04 1.02	0.008 0.2	3	9.818 43.67	0.003 0.08
WAV-24993	0.12 3.05	0.225 5.72	0.03 0.76	0.006 0.15	3	9.4 41.81	0.003 0.08
WAV-24995	0.125 3.18	0.25 6.35	0.062 1.57	0.032 0.81	3	153.022 680.68	0.001 0.03
WAV-24997	0.128 3.25	0.25 6.35	0.015 0.38	0.003 0.08	3	2.5 11.12	0.008 0.2
WAV-24741	0.128 3.25	0.281 7.14	0.045 1.14	0.006 0.15	3	5.5 24.47	0.005 0.13
WAV-24747	0.131 3.33	0.249 6.32	0.015 0.38	0.003 0.08	3	2.4 10.68	0.008 0.2
WAV-24749	0.132 3.35	0.222 5.64	0.032 0.81	0.005 0.13	3	5.1 22.68	0.004 0.1
WAV-24750	0.134 3.4	0.183 4.65	0.023 0.58	0.004 0.1	2	0.4 1.78	0.012 0.3
WAV-24753	0.154 3.91	0.281 7.14	0.042 1.07	0.005 0.13	3	6.1 27.13	0.006 0.15
WAV-24759	0.165 4.19	0.25 6.35	0.025 0.64	0.005 0.13	3	3.7 16.46	0.006 0.15
WAV-24761	0.167 4.24	0.375 9.53	0.04 1.02	0.006 0.15	3	5.516 24.54	0.008 0.2
WAV-24765	0.169 4.29	0.306 7.77	0.06 1.52	0.008 0.2	3	15.5 68.94	0.005 0.13
WAV-24769	0.175 4.45	0.375 9.53	0.03 0.76	0.007 0.18	4	- -	0.004 0.1
WAV-24771	0.18 4.57	0.343 8.71	0.03 0.76	0.01 0.25	3	26.9 119.65	0.005 0.13
WAV-24773	0.185 4.7	0.375 9.53	0.035 0.89	0.006 0.15	3	5.402 24.03	0.009 0.23
WAV-24775	0.187 4.75	0.265 6.73	0.06 1.52	0.008 0.2	3	7.1 31.58	0.004 0.1
WAV-24777	0.19 4.83	0.281 7.14	0.03 0.76	0.01 0.25	3	13.4 59.6	0.004 0.1
WAV-24779	0.193 4.9	0.28 7.11	0.04 1.02	0.016 0.41	3	27.9 124.1	0.002 0.05
WAV-24780	0.194 4.93	0.242 6.15	0.03 0.76	0.006 0.15	2	0.8 3.56	0.015 0.38
WAV-24785	0.2 5.08	0.307 7.8	0.06 1.52	0.008 0.2	3	9.9 44.04	0.005 0.13
WAV-24791	0.203 5.16	0.375 9.53	0.031 0.79	0.005 0.13	3	6.3 28.02	0.011 0.28
WAV-24793	0.203 5.16	0.376 9.55	0.055 1.4	0.006 0.15	4	16.2 72.06	0.005 0.13
WAV-24797	0.206 5.23	0.36 9.14	0.06 1.52	0.01 0.25	3	22.4 99.64	0.005 0.13
WAV-24799	0.219 5.56	0.414 10.52	0.071 1.8	0.02 0.51	3	105.9 471.04	0.003 0.08
WAV-24801	0.221 5.61	0.374 9.5	0.05 1.27	0.01 0.25	3	20.7 92.07	0.006 0.15
WAV-24803	0.252 6.4	0.75 19.05	0.086 2.18	0.012 0.3	3	- -	0.014 0.36
WAV-24805	0.255 6.48	0.345 8.76	0.03 0.76	0.008 0.2	3	5.5 24.46	0.008 0.2
WAV-24807	0.265 6.73	0.365 9.27	0.03 0.76	0.006 0.15	3	3.4 15.12	0.011 0.28
WAV-24813	0.265 6.73	0.432 10.97	0.045 1.14	0.016 0.41	3	42.1 187.26	0.005 0.13
WAV-24815	0.265 6.73	0.5 12.7	0.045 1.14	0.006 0.15	3	9.5 42.26	0.016 0.41
WAV-24819	0.265 6.73	0.5 12.7	0.045 1.14	0.01 0.25	3	26.3 116.98	0.01 0.25
WAV-24821	0.265 6.73	0.5 12.7	0.045 1.14	0.016 0.41	3	59.3 263.77	0.007 0.18
WAV-24825	0.288 7.32	0.41 10.41	0.062 1.57	0.005 0.13	3	2.8 12.45	0.006 0.15
WAV-24827	0.29 7.37	0.531 13.49	0.07 1.78	0.01 0.25	3	24.8 110.31	0.011 0.28
WAV-24829	0.312 7.92	0.463 11.76	0.031 0.79	0.016 0.41	4	54.6 242.86	0.004 0.1
WAV-24831	0.312 7.92	0.463 11.76	0.05 1.27	0.02 0.51	4	97.2 432.35	0.003 0.08
WAV-24833	0.322 8.18	0.42 10.67	0.04 1.02	0.006 0.15	3	2.3 10.23	0.015 0.38
WAV-24835	0.325 8.26	0.5 12.7	0.055 1.4	0.008 0.2	3	10 44.48	0.014 0.36
WAV-24839	0.328 8.33	0.682 17.32	0.062 1.57	0.01 0.25	3	15.113 67.23	0.018 0.46
WAV-24843	0.346 8.79	0.562 14.27	0.08 2.03	0.003 0.08	3	- -	- -

When the load is static or the working range is small, and the allowable amount of axial space is limited, the use of a wave washer is an efficient method of obtaining the required loading. Loads obtainable from wave washers are usually in the range of a few pounds to hundreds of pounds. These springs are often used as cushion springs or cushion spacers between parts on shafts, or to take up the expected amount of variation in assembled parts. Wave washers can be made in a very large range of sizes.

Parts available in spring steel; call for availability of stainless.


Tolerances

A = +.010"

B = up to/including .10" +.005"
Over .10" +.010"


C = Commercial

D = +.010"

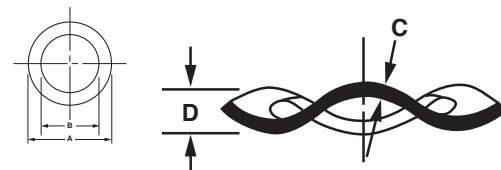

Wave Disc Springs


Century Stock Number	B Inches mm	A Inches mm	D Inches mm	C Inches mm	No of Waves	App. Max. Load. Lbs. N	App. Defl. Inches mm						
WAV-24845	0.346	8.79	0.562	14.27	0.08	2.03	0.005	0.13	3	4.6	20.46	0.028	0.71
WAV-24847	0.346	8.79	0.562	14.27	0.08	2.03	0.01	0.25	3	18.5	82.29	0.014	0.36
WAV-24848	0.35	8.89	0.492	12.5	0.035	0.89	0.007	0.18	3	4	17.79	0.02	0.51
WAV-24849	0.355	9.02	0.5	12.7	0.045	1.14	0.005	0.13	3	2.7	12.01	0.024	0.61
WAV-24853	0.365	9.27	0.485	12.32	0.06	1.52	0.006	0.15	3	2.7	12.01	0.02	0.51
WAV-24855	0.382	9.7	0.625	15.88	0.08	2.03	0.007	0.18	3	9.2	40.92	0.024	0.61
WAV-24857	0.385	9.78	0.5	12.7	0.05	1.27	0.005	0.13	3	1.5	6.67	0.026	0.66
WAV-24859	0.385	9.78	0.5	12.7	0.05	1.27	0.01	0.25	3	6.3	28.02	0.013	0.33
WAV-24863	0.386	9.8	0.495	12.57	0.05	1.27	0.01	0.25	3	10.3	45.81	0.013	0.33
WAV-24865	0.39	9.91	0.562	14.27	0.06	1.52	0.01	0.25	3	12	53.38	0.015	0.38
WAV-24867	0.39	9.91	0.625	15.88	0.08	2.03	0.016	0.41	3	40.1	178.36	0.012	0.3
WAV-24869	0.39	9.91	0.655	16.64	0.093	2.36	0.01	0.25	3	20.3	90.29	0.018	0.46
WAV-24871	0.39	9.91	0.655	16.64	0.11	2.79	0.016	0.41	3	45.7	203.27	0.012	0.3
WAV-24873	0.39	9.91	0.655	16.64	0.11	2.79	0.02	0.51	3	81.2	361.18	0.009	0.23
WAV-24875	0.406	10.31	0.65	16.51	0.085	2.16	0.01	0.25	3	17.7	78.73	0.019	0.48
WAV-24877	0.42	10.67	0.524	13.31	0.068	1.73	0.003	0.08	3	0.8	3.56	0.05	1.27
WAV-24879	0.437	11.1	0.55	13.97	0.036	0.91	0.01	0.25	3	9.6	42.7	0.016	0.41
WAV-24881	0.44	11.18	0.618	15.7	0.04	1.02	0.004	0.1	3	1.3	5.78	0.036	0.91
WAV-24883	0.44	11.18	0.618	15.7	0.04	1.02	0.008	0.2	3	6.8	30.25	0.023	0.58
WAV-24885	0.441	11.2	0.654	16.61	0.075	1.91	0.01	0.25	3	13.6	60.49	0.02	0.51
WAV-24887	0.441	11.2	0.655	16.64	0.094	2.39	0.01	0.25	3	13.7	60.94	0.02	0.51
WAV-24889	0.441	11.2	0.655	16.64	0.094	2.39	0.016	0.41	3	30.8	137	0.013	0.33
WAV-24891	0.441	11.2	0.75	19.05	0.08	2.03	0.015	0.38	3	47.2	209.95	0.016	0.41
WAV-24893	0.445	11.3	0.61	15.49	0.094	2.39	0.004	0.1	3	1.4	6.23	0.047	1.19
WAV-24895	0.445	11.3	0.61	15.49	0.094	2.39	0.006	0.15	3	3.3	14.68	0.031	0.79
WAV-24897	0.445	11.3	0.61	15.49	0.094	2.39	0.01	0.25	3	9.3	41.37	0.019	0.48
WAV-24899	0.45	11.43	0.605	15.37	0.05	1.27	0.007	0.18	3	4	17.79	0.027	0.69
WAV-24901	0.455	11.56	0.87	22.1	0.094	2.39	0.01	0.25	3	27	120.1	0.029	0.74
WAV-24903	0.47	11.94	0.88	22.35	0.045	1.14	0.005	0.13	4	11.5	51.15	0.034	0.86
WAV-24905	0.47	11.94	0.88	22.35	0.045	1.14	0.007	0.18	4	22.6	100.52	0.025	0.64
WAV-24909	0.505	12.83	0.656	16.66	0.07	1.78	0.006	0.15	4	4	17.79	0.021	0.53
WAV-24911	0.505	12.83	0.75	19.05	0.045	1.14	0.01	0.25	3	13.7	60.94	0.026	0.66
WAV-24913	0.515	13.08	0.865	21.97	0.093	2.36	0.01	0.25	3	20.3	90.29	0.032	0.81
WAV-24915	0.52	13.21	0.74	18.8	0.08	2.03	0.016	0.41	3	25.6	113.87	0.018	0.46
WAV-24923	0.545	13.84	0.852	21.64	0.08	2.03	0.032	0.81	3	168.9	751.27	0.01	0.25
WAV-24925	0.56	14.22	0.75	19.05	0.045	1.14	0.01	0.25	3	8	35.58	0.029	0.74
WAV-24927	0.563	14.3	0.76	19.3	0.11	2.79	0.018	0.46	3	27.4	121.88	0.016	0.41
WAV-24929	0.565	14.35	0.687	17.45	0.062	1.57	0.01	0.25	3	8.1	36.03	0.026	0.66
WAV-24931	0.58	14.73	0.73	18.54	0.04	1.02	0.01	0.25	3	9.6	42.7	0.029	0.74
WAV-24933	0.609	15.47	0.859	21.82	0.062	1.57	0.01	0.25	3	10.8	48.04	0.036	0.91
WAV-24935	0.62	15.75	0.75	19.05	0.045	1.14	0.01	0.25	4	14.1	62.72	0.018	0.46
WAV-24937	0.64	16.26	0.866	22	0.045	1.14	0.02	0.51	3	41.6	185.04	0.017	0.43
WAV-24941	0.642	16.31	1	25.4	0.105	2.67	0.016	0.41	3	36.6	162.8	0.03	0.76
WAV-24943	0.65	16.51	0.79	20.07	0.062	1.57	0.01	0.25	3	8.1	36.03	0.035	0.89
WAV-24945	0.688	17.48	0.937	23.8	0.141	3.58	0.012	0.3	3	12.9	57.38	0.037	0.94
WAV-24947	0.691	17.55	1	25.4	0.092	2.34	0.01	0.25	3	12.3	54.71	0.048	1.22
WAV-24949	0.695	17.65	0.945	24	0.078	1.98	0.025	0.64	3	55.4	246.42	0.018	0.46
WAV-24951	0.7	17.78	0.85	21.59	0.09	2.29	0.01	0.25	3	8.1	36.03	0.04	1.02
WAV-24953	0.7	17.78	0.875	22.23	0.09	2.29	0.007	0.18	3	4.5	20.02	0.059	1.5
WAV-24955	0.718	18.24	0.92	23.37	0.05	1.27	0.01	0.25	3	9.2	40.92	0.04	1.02
WAV-24957	0.718	18.24	1	25.4	0.087	2.21	0.01	0.25	3	10.1	44.92	0.049	1.24
WAV-24959	0.75	19.05	1	25.4	0.136	3.45	0.012	0.3	3	11.2	49.82	0.043	1.09
WAV-24961	0.767	19.48	1.125	28.58	0.105	2.67	0.016	0.41	3	27.3	121.43	0.04	1.02
WAV-24962	0.78	19.81	1.004	25.5	0.071	1.8	0.011	0.28	3	8.5	37.81	0.036	0.91
WAV-24965	0.781	19.84	1	25.4	0.08	2.03	0.012	0.3	3	14.8	65.83	0.044	1.12
WAV-24967	0.781	19.84	1	25.4	0.08	2.03	0.02	0.51	3	41.2	183.26	0.027	0.69
WAV-24969	0.8	20.32	0.9	22.86	0.09	2.29	0.018	0.46	3	15.9	70.72	0.027	0.69
WAV-24971	0.812	20.62	0.983	24.97	0.08	2.03	0.01	0.25	3	7.9	35.14	0.054	1.37
WAV-24973	0.812	20.62	1.095	27.81	0.062	1.57	0.01	0.25	3	7.1	31.58	0.052	1.32
WAV-25000	0.856	21.74	1.102	27.99	0.075	1.91	0.012	0.3	3	8.4	37.36	0.054	1.37
WAV-25004	0.901	22.89	1.15	29.21	0.06	1.52	0.012	0.3	3	12	53.38	0.048	1.22
WAV-25096	0.91	23.11	1.41	35.81	0.12	3.05	0.02	0.51	3	64	284.67	0.045	1.14
WAV-25008	0.914	23.22	1.078	27.38	0.12	3.05	0.005	0.13	3	1.4	6.23	0.115	2.92
WAV-25010	0.915	23.24	1.11	28.19	0.12	3.05	0.01	0.25	3	8	35.58	0.069	1.75
WAV-25012	0.926	23.52	1.116	28.35	0.09	2.29	0.018	0.46	3	25.2	112.09	0.039	0.99
WAV-25014	0.959	24.36	1.115	28.32	0.055	1.4	0.02	0.51	3	24.5	108.98	0.035	0.89
WAV-25016	0.96	24.38	1.11	28.19	0.048	1.22	0.012	0.3	3	5.2	23.13	0.036	0.91
WAV-25018	0.97	24.64	1.21	30.73	0.062	1.57	0.012	0.3	4	23.6	104.97	0.037	0.94
WAV-25020	1.014	25.76	1.245	31.62	0.145	3.68	0.028	0.71	3	67.2	298.91	0.031	0.79
WAV-25022	1.015	25.78	1.25	31.75	0.05	1.27	0.006	0.15	3	0.9	4	0.044	1.12
WAV-25024	1.016	25.81	1.437	36.5	0.156	3.96	0.012	0.3	3	15.9	70.72	0.084	2.13
WAV-25028	1.044	26.52	1.235	31.37	0.09	2.29	0.018	0.46	3	22.7	100.97	0.048	1.22
WAV-25034	1.135	28.83	1.47	37.34	0.062	1.57	0.012	0.3	3	4.6	20.46	0.05	1.27
WAV-25036	1.185	30.1	1.437	36.5	0.075	1.91	0.02	0.51	3	30.7	136.55	0.055	1.4
WAV-25038	1.201	30.51	1.543	39.19	0.105	2.67	0.016	0.41	3	26.7	118.76	0.079	2.01

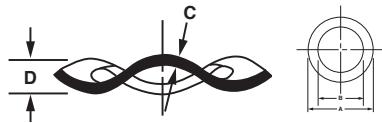

Wave Disc Springs

Century Stock Number	B Inches	B mm	A Inches	A mm	D Inches	D mm	C Inches	C mm	No of Waves	App. Max. Load. Lbs.	N	App. Defl. Inches	App. Defl. mm
WAV-25039A	1.239	31.47	1.593	40.46	0.11	2.79	0.018	0.46	3	24	106.75	0.055	1.4
WAV-25040	1.25	31.75	1.453	36.91	0.09	2.29	0.016	0.41	4	28.6	127.21	0.043	1.09
WAV-25042	1.25	31.75	2.004	50.9	0.14	3.56	0.032	0.81	3	160.6	714.35	0.059	1.5
WAV-25043	1.261	32.03	1.621	41.17	0.112	2.84	0.019	0.48	3	25.5	113.42	0.056	1.42
WAV-25045	1.404	35.66	1.819	46.2	0.125	3.18	0.02	0.51	3	30	133.44	0.062	1.57
WAV-25050	1.565	39.75	2.01	51.05	0.15	3.81	0.032	0.81	3	106.8	475.05	0.067	1.7
WAV-25051	1.575	40.01	2.028	51.51	0.14	3.56	0.022	0.56	3	35	155.68	0.069	1.75
WAV-25054	1.7	43.18	1.8	45.72	0.05	1.27	0.025	0.64	4	14.4	64.05	0.025	0.64
WAV-25056	1.75	44.45	2	50.8	0.15	3.81	0.025	0.64	4	62.1	276.22	0.053	1.35
WAV-25058	1.781	45.24	2	50.8	0.187	4.75	0.02	0.51	4	34.5	153.46	0.067	1.7
WAV-25059	1.872	47.55	2.42	61.47	0.168	4.27	0.025	0.64	3	45	200.16	0.082	2.08
WAV-25060	2	50.8	2.25	57.15	0.2	5.08	0.02	0.51	3	19.7	87.63	0.151	3.84
WAV-25062	2.032	51.61	2.875	73.03	0.215	5.46	0.016	0.41	4	44.2	196.6	0.151	3.84
WAV-25075	3.37	85.6	4.3	109.22	0.302	7.67	0.045	1.14	3	140	622.72	0.148	3.76
WAV-25079	3.89	98.81	4.997	126.92	0.355	9.02	0.05	1.27	3	177	787.3	0.172	4.37

Reel Retrievers

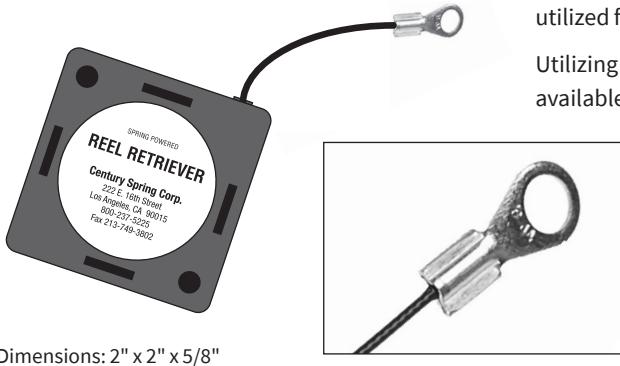

Dimensions: 2" x 2" x 5/8"

Cable Connector

Adaptable, strong and reliable, the Reel Retriever is a versatile, efficient device which offers counter-balance on any plane. A compact plastic box contains a spring-loaded retracting cable assembly which can be securely fastened to any surface.

The Reel Retriever is ideal for drawer returns, point-of-purchase displays of cameras, cell phones, golf equipment, power tools, shoes, TV remote controls, video games and other products that are intended to be handled by customers. They can also be utilized for any counter-balance application under 2 pounds.

Utilizing a nylon-coated, braided, 7x7 stainless steel aircraft cable, Reel Retriever is available in many pull forces with cable lengths ranging from 36" to 60".

Century Stock Number	Force Range	Max. Travel Inches
RR101	.3 to .5#	60"
RR102	.4 to 1.0#	48"
RR103	.5 to 1.5#	36"

Constant Force Springs

A constant force spring is a roll of prestressed strip which exerts a nearly constant restraining force to resist uncoiling. The force is constant because the change in the radius of curvature is constant. This is true if the change in coil diameter due to buildup is disregarded.

Long extension capabilities, constant torque and virtual absence of intercoil friction have led many designers to specify constant force springs in such applications as brush springs for motors, counterbalance springs for window sashes and carriage return springs for typewriters. Constant force springs are used to drive mechanisms for timers, movie cameras and cable retractors.


It is recommended to leave at least two wraps of the spring coiled at all times during use. The cycle life is approximately 2000 cycles.

Tolerances


Width tolerances for constant force springs are dictated by strip tolerances and diameter tolerances are determined by storage and output drum tolerances. Torque tolerances are $\pm 10\%$ and I.D. tolerances are $\pm 25\%$. Strip thickness and length should be considered reference dimensions.

Constant Force Springs

Century Stock Number	Load $\pm 10\%$ Lbs.	Thickness Inches	Width Inches	Length Inches	I.D. $\pm 25\%$ Inches	Drum Dia. (Rec) Inches
CF37	0.37	0.003	0.187	12	0.227	.252
CF49	0.49	0.003	0.25	15	0.228	.252
CF66	0.66	0.004	0.25	15	0.318	.336
CF83	0.83	0.004	0.312	15	0.33	.336
CF103	1.03	0.005	0.312	17	0.464	.432
CF148	1.48	0.006	0.375	24	0.409	.432
CF200	2	0.006	0.5	25	0.463	.504
CF260	2.6	0.008	0.5	30	0.588	.600
CF330	3.3	0.01	0.5	30	0.722	.684
CF400	4	0.01	0.625	33	0.745	.852
CF495	4.95	0.012	0.625	33	0.94	1.032
CF594	5.94	0.012	0.75	40	0.87	1.032
CF795	7.95	0.016	0.75	40	1.224	1.140
CF1060	10.6	0.016	1	40	1.159	1.368
CF1320	13.2	0.02	1	40	1.458	1.368
CF1650	16.5	0.02	1.25	50	1.358	1.536
CF1980	19.8	0.02	1.5	48	1.28	1.536
CF2480	24.8	0.025	1.5	52	1.58	1.896
CF3300	33	0.025	2	52	1.78	2.136
CF4100	41	0.031	2	60	2.25	2.700

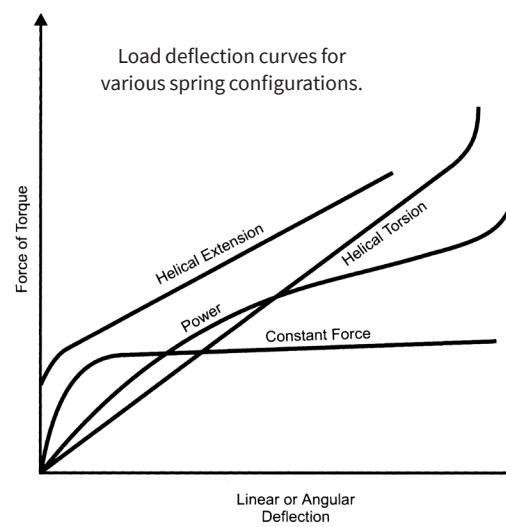


Stove Handles

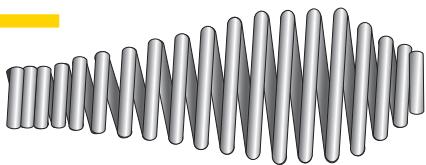

Century Spring stocks more spring stove handles than any other spring company. We stock all sizes, which are available for immediate delivery. All stove handles are available in Gold Iridite®, nickel or plain finish.


CENTURY STOCK NUMBER	Max Dia. Inches	Length Inches	Fit Inches	Finish
SH-20A	1.5	4.25	0.50 Rod	Plain
SH-20B	1.5	4.25	0.50 Rod	Gold Iridite®
SH-20C	1.5	4.25	0.50 Rod	Nickel

CENTURY STOCK NUMBER	Max Dia. Inches	Length Inches	Fit Inches	Finish
SH-40A	1.13	2.5	.38 Rod	Plain
SH-40B	1.13	2.5	.38 Rod	Gold Iridite®
SH-40C	1.13	2.5	.38 Rod	Nickel

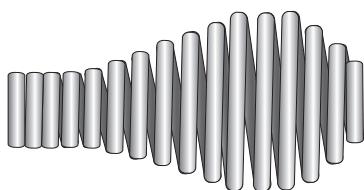



CENTURY STOCK NUMBER	Max Dia. Inches	Length Inches	Fit Inches	Finish
SH-10A	1.75	3.5	0.50 Rod	Plain
SH-10B	1.75	3.5	0.50 Rod	Gold Iridite®
SH-10C	1.75	3.5	0.50 Rod	Nickel

CENTURY STOCK NUMBER	Max Dia. Inches	Length Inches	Fit Inches	Finish
SH-90A	1.25	2.5	.38 Rod	Plain
SH-90B	1.25	2.5	.38 Rod	Gold Iridite®
SH-90C	1.25	2.5	.38 Rod	Nickel

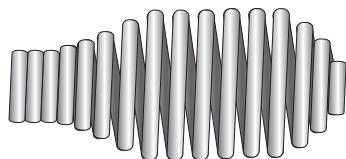

CENTURY STOCK NUMBER	Max Dia. Inches	Length Inches	Fit Inches	Finish
SH-60A	1.56	3.38	0.50 Rod	Plain
SH-60B	1.56	3.38	0.50 Rod	Gold Iridite®
SH-60C	1.56	3.38	0.50 Rod	Nickel

CENTURY STOCK NUMBER	Max Dia. Inches	Length Inches	Fit Inches	Finish
SH-100A	1.25	4.25	0.50 Rod	Plain
SH-100B	1.25	4.25	0.50 Rod	Gold Iridite®
SH-100C	1.25	4.25	0.50 Rod	Nickel

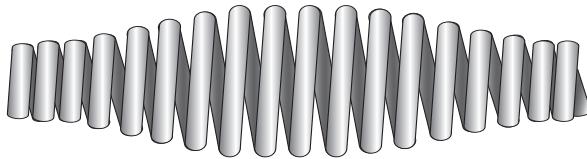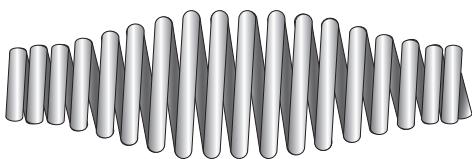


CENTURY STOCK NUMBER	Max Dia. Inches	Length Inches	Fit Inches	Finish
SH-30A	1.5	4.5	0.50 Rod	Plain
SH-30B	1.5	4.5	0.50 Rod	Gold Iridite®
SH-30C	1.5	4.5	0.50 Rod	Nickel

CENTURY STOCK NUMBER	Max Dia. Inches	Length Inches	Fit Inches	Finish
SH-70A	1.5	5.75	0.50 Rod	Plain
SH-70B	1.5	5.75	0.50 Rod	Gold Iridite®
SH-70C	1.5	5.75	0.50 Rod	Nickel

Drawbar Springs

Extension springs do not have physical extension stops to prevent unexpected overloading and subsequent failure. For this reason, and also for the reason that extension-spring hook stress concentrations limit the load-carrying potential, the drawbar spring evolved. The load is applied at the ends of long steel loops that pass through the spring's center and are hooked around the opposite end, thus compressing the spring upon loading. Not only is the drawbar spring excellent for unexpected overload situations, it also offers a built-in safety feature in that upon fracturing, it will continue to carry a static load. As an example, this type design is a must when supporting a porch swing.

Selecting a Drawbar Spring

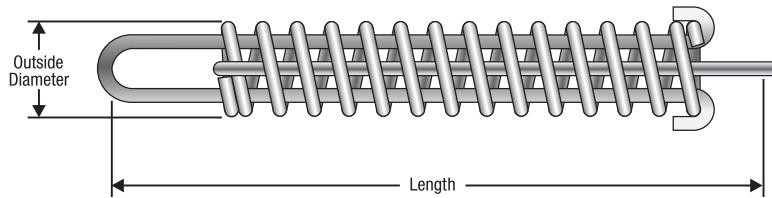

The following tables present **Century Spring's** stock inventory. The indicated spring rate (lbs./in.) is the number of pounds it takes to stretch this assembly one inch, i.e., if the rate = 25 lbs./in. it would take 25 pounds to pull it out the first inch, 50 pounds for two inches, etc...

Drawbar springs can be manufactured as special order items. Call our Custom Spring Department for price and delivery.

Drawbar Springs ZINC PLATED SPRING STEEL



Century Stock Number	Rate Lbs./In.	Max. Defl. Inches	Max. Load Lbs.	Length Inches	O.D. Inches	Drawbar Wire Size
DB7001	25	2	50	6	1	.105
DB7003	50	1.9	95	7	1.125	.112
DB7005	75	2.1	160	7.5	1.375	.148
DB7007	100	2	200	7.75	1.437	.177
DB7009	125	1.9	235	8.125	1.5	.192
DB7010	157	1.8	300	7.125	1.55	.192
DB7011	200	2	400	9.625	1.75	.218
DB7013	250	2.4	600	13.375	2.25	.312
DB7015	150	4	610	19.375	2.25	.312

Drawbar Springs STAINLESS STEEL

Century Stock Number	Rate Lbs./In.	Max. Defl. Inches	Max. Load Lbs.	Length Inches	O.D. Inches	Drawbar Wire Size
DBS7052	51	1.3	70	4	1	.120
DBS7054	74	1.6	120	5	1.125	.120
DBS7056	99	1.5	150	6	1.219	.177
DBS7058	161	1.4	210	7	1.5	.187

Urethane Springs

Century Spring's stock inventory of urethane compression springs was designed primarily for special applications where our steel wire springs are not as well suited. For example, these springs are useful in applications where corrosion, vibration, and magnetism prevent the use of conventional steel springs. Also, urethane springs have proven to be the safest, most efficient and reliable compression material for punching, stamping and drawing dies.

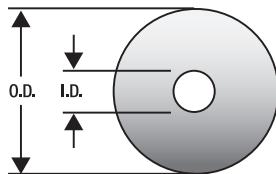

As compared to conventional springs, the advantages of the urethane material include the following:

- High load-carrying capability
- High dielectric strength and non-magnetic
- Protection against marring/galling
- Longer life
- Abrasion resistance
- Oil and solvent resistance
- Low noise
- Vibration damping and shock absorbance
- 100% load-bearing surface
- Bondable to mating parts
- Effectiveness between -30° F and 180° F

An example of urethane material's load-carrying capability is shown in the following table which is presented in pounds that cause 1/8" deflection:

Conventional heavy-duty	
Steel die spring	Up to 500 Lbs.
Urethane springs	Up to 2,600 Lbs.

Century Spring's urethane spring material is a polyether-elastomer that reacts similarly to an incompressible fluid. The volume of material moved by compression is displaced laterally in the form of bulging sides. An approximation to the change in diameter of one of our standard cylindrical urethane springs can be made by increasing the diameter by the inches of compression.

Example: A 1.00" long spring is to be deflected 15 percent or .15". The diameter will then also increase roughly by .15". This material's lateral expansion must be considered for many applications.


The recommended maximum free (unloaded) length is two-and-one-half times the spring's outside diameter, although springs may be stacked with guide rods and washer-shaped spacers.

Maximum deflections allowed increase as material becomes softer:

70A	60% of length
80A	50% of length
90A	35% of length
95A	25% of length


Suggested maximum cyclic frequencies and deflection percentages of free length are summarized by the following:

Maximum Deflection	Cycles Per Hour
Slow speeds or short runs	less than 25% 200
Intermittent	up to 25% 700
Continuous	up to 15% 12000

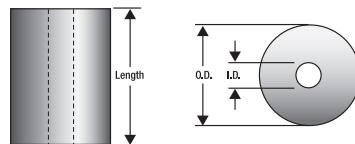

Stock Urethane Compression Springs


Century Stock Number	Inside Dia. Inches	Outside Dia. Inches	Durometer	Free Length Approx.	Load (lbs.)	Deflection (in.)
U0188-0500-60A	0.17	0.69	70A	0.5	10	0
U0188-0750-60A	0.17	0.69	70A	0.75	10	0
U0188-1000-60A	0.17	0.69	70A	1	10	0
U0188-1250-60A	0.17	0.69	70A	1.25	10	0
U0188-(length)-60A				Any to 12	10	0
U0188-0500-80A	0.17	0.69	80A	0.5	20	0
U0188-0750-80A	0.17	0.69	80A	0.75	20	0
U0188-1000-80A	0.17	0.69	80A	1	20	0
U0188-1250-80A	0.17	0.69	80A	1.25	20	0
U0188-(length)-80A				Any to 12	20	0
U0188-0500-90A	0.17	0.69	90A	0.5	30	0
U0188-0750-90A	0.17	0.69	90A	0.75	30	0
U0188-1000-90A	0.17	0.69	90A	1	30	0
U0188-1250-90A	0.17	0.69	90A	1.25	30	0
U0188-(length)-90A				Any to 12	30	0

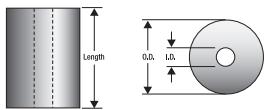

Century Spring


Stock Urethane Compression Springs

Century Stock Number	Inside Dia. Inches	Outside Dia. Inches	Durometer	Free Length Approx.	
U0250-0500-60A	0.23	0.75	70A	0.5	
U0250-0750-60A	0.23	0.75	70A	0.75	
U0250-1000-60A	0.23	0.75	70A	1	
U0250-1250-60A	0.23	0.75	70A	1.25	
U0250-1500-60A	0.23	0.75	70A	1.5	
U0250-(length)-60A				Any to 12	
U0250-0500-80A	0.23	0.75	80A	0.5	
U0250-0750-80A	0.23	0.75	80A	0.75	
U0250-1000-80A	0.23	0.75	80A	1	
U0250-1250-80A	0.23	0.75	80A	1.25	
U0250-1500-80A	0.23	0.75	80A	1.5	
U0250-(length)-80A				Any to 12	
U0250-0500-90A	0.23	0.75	90A	0.5	
U0250-0750-90A	0.23	0.75	90A	0.75	
U0250-1000-90A	0.23	0.75	90A	1	
U0250-1250-90A	0.23	0.75	90A	1.25	
U0250-1500-90A	0.23	0.75	90A	1.5	
U0250-(length)-90A				Any to 12	

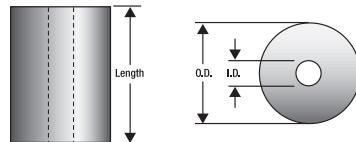




Stock Urethane Compression Springs


Century Stock Number	Inside Dia. Inches	Outside Dia. Inches	Durometer	Free Length Approx.	Load (lbs.)	Deflection (in.)
U0312-0500-60A	0.3	0.81	70A	0.5	20	0
U0312-0750-60A	0.3	0.81	70A	0.75	20	0
U0312-1000-60A	0.3	0.81	70A	1	20	0
U0312-1250-60A	0.3	0.81	70A	1.25	20	0
U0312-1500-60A	0.3	0.81	70A	1.5	20	0
U0312-(length)-60A				Any to 12	20	0
U0312-0500-80A	0.3	0.81	80A	0.5	60	0
U0312-0750-80A	0.3	0.81	80A	0.75	60	0
U0312-1000-80A	0.3	0.81	80A	1	60	0
U0312-1250-80A	0.3	0.81	80A	1.25	60	0
U0312-1500-80A	0.3	0.81	80A	1.5	60	0
U0312-(length)-80A				Any to 12	60	0
U0312-0500-90A	0.3	0.81	90A	0.5	120	0
U0312-0750-90A	0.3	0.81	90A	0.75	120	0
U0312-1000-90A	0.3	0.81	90A	1	120	0
U0312-1250-90A	0.3	0.81	90A	1.25	120	0
U0312-1500-90A	0.3	0.81	90A	1.5	120	0
U0312-(length)-90A				Any to 12	120	0

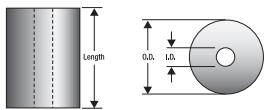

Century Spring


Stock Urethane Compression Springs

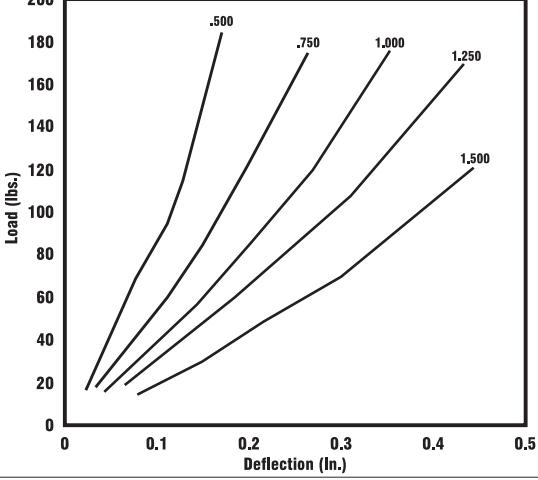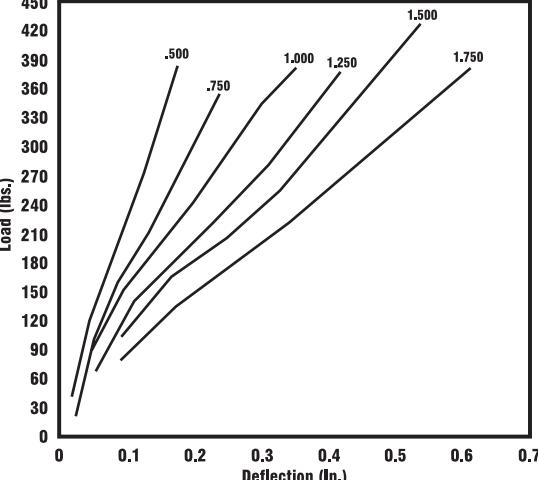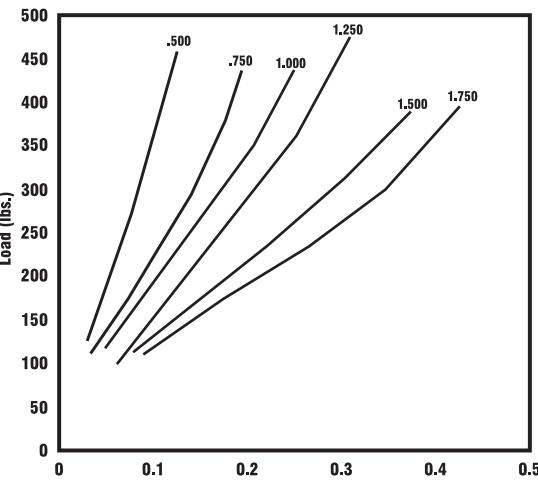Century Stock Number	Inside Dia. Inches	Outside Dia. Inches	Durometer	Free Length Approx.	
U0375-0500-60A	0.36	0.88	70A	0.5	
U0375-0750-60A	0.36	0.88	70A	0.75	
U0375-1000-60A	0.36	0.88	70A	1	
U0375-1250-60A	0.36	0.88	70A	1.25	
U0375-1500-60A	0.36	0.88	70A	1.5	
U0375-(length)-60A				Any to 12	
U0375-0500-80A	0.36	0.88	80A	0.5	
U0375-0750-80A	0.36	0.88	80A	0.75	
U0375-1000-80A	0.36	0.88	80A	1	
U0375-1250-80A	0.36	0.88	80A	1.25	
U0375-1500-80A	0.36	0.88	80A	1.5	
U0375-1750-80A	0.36	0.88	80A	1.75	
U0375-(length)-80A				Any to 12	
U0375-0500-90A	0.36	0.88	90A	0.5	
U0375-0750-90A	0.36	0.88	90A	0.75	
U0375-1000-90A	0.36	0.88	90A	1	
U0375-1250-90A	0.36	0.88	90A	1.25	
U0375-1500-90A	0.36	0.88	90A	1.5	
U0375-1750-90A	0.36	0.88	90A	1.75	
U0375-(length)-90A				Any to 12	

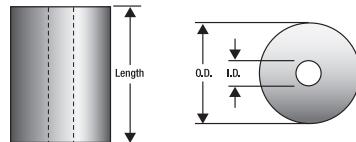




Stock Urethane Compression Springs


Century Stock Number	Inside Dia. Inches	Outside Dia. Inches	Durometer	Free Length Approx.	Load (lbs.)	Deflection (In.)
U0500-0500-60A	0.48	1	70A	0.5		
U0500-0750-60A	0.48	1	70A	0.75		
U0500-1000-60A	0.48	1	70A	1		
U0500-1250-60A	0.48	1	70A	1.25		
U0500-1500-60A	0.48	1	70A	1.5		
U0500-(length)-60A				Any to 12		
U0500-0500-80A	0.48	1	80A	0.5		
U0500-0750-80A	0.48	1	80A	0.75		
U0500-1000-80A	0.48	1	80A	1		
U0500-1250-80A	0.48	1	80A	1.25		
U0500-1500-80A	0.48	1	80A	1.5		
U0500-1750-80A	0.48	1	80A	1.75		
U0500-2000-80A	0.48	1	80A	2		
U0500-(length)-80A				Any to 12		
U0500-0500-90A	0.48	1	90A	0.5		
U0500-0750-90A	0.48	1	90A	0.75		
U0500-1000-90A	0.48	1	90A	1		
U0500-1250-90A	0.48	1	90A	1.25		
U0500-1500-90A	0.48	1	90A	1.5		
U0500-1750-90A	0.48	1	90A	1.75		
U0500-2000-90A	0.48	1	90A	2		
U0500-(length)-90A				Any to 12		

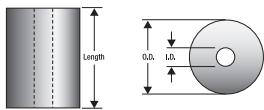

Century Spring


Stock Urethane Compression Springs

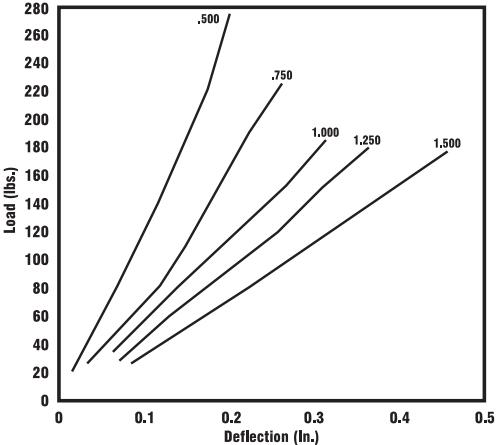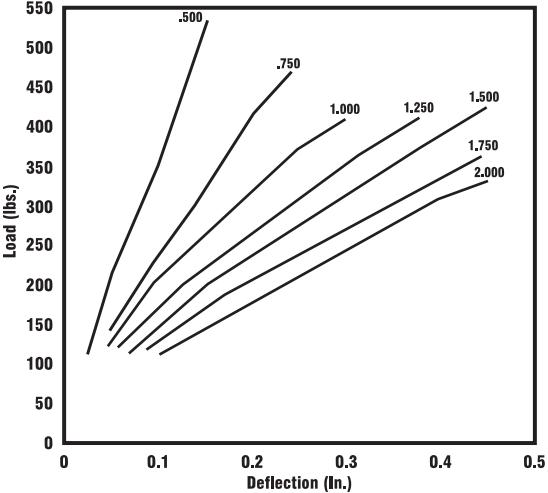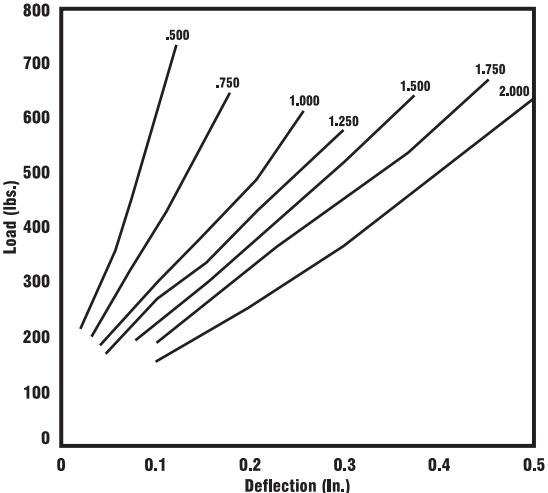Century Stock Number	Inside Dia. Inches	Outside Dia. Inches	Durometer	Free Length Approx.	
U0625-0500-60A	0.6	1.13	70A	0.5	
U0625-0750-60A	0.6	1.13	70A	0.75	
U0625-1000-60A	0.6	1.13	70A	1	
U0625-1250-60A	0.6	1.13	70A	1.25	
U0625-1500-60A	0.6	1.13	70A	1.5	
U0625-(length)-60A				Any to 12	
U0625-0500-80A	0.6	1.13	80A	0.5	
U0625-0750-80A	0.6	1.13	80A	0.75	
U0625-1000-80A	0.6	1.13	80A	1	
U0625-1250-80A	0.6	1.13	80A	1.25	
U0625-1500-80A	0.6	1.13	80A	1.5	
U0625-1750-80A	0.6	1.13	80A	1.75	
U0625-2000-80A	0.6	1.13	80A	2	
U0625-(length)-80A				Any to 12	
U0625-0500-90A	0.6	1.13	90A	0.5	
U0625-0750-90A	0.6	1.13	90A	0.75	
U0625-1000-90A	0.6	1.13	90A	1	
U0625-1250-90A	0.6	1.13	90A	1.25	
U0625-1500-90A	0.6	1.13	90A	1.5	
U0625-1750-90A	0.6	1.13	90A	1.75	
U0625-2000-90A	0.6	1.13	90A	2	
U0625-(length)-90A				Any to 12	



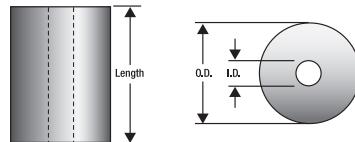



Stock Urethane Compression Springs

Century Stock Number	Inside Dia. Inches	Outside Dia. Inches	Durometer	Free Length Approx.	Load (lbs.)	Deflection (in.)
U0750-0750-60A	0.74	1.38	70A	0.75	750	0.1
U0750-1000-60A	0.74	1.38	70A	1	1,000	0.2
U0750-1250-60A	0.74	1.38	70A	1.25	1,250	0.3
U0750-1500-60A	0.74	1.38	70A	1.5	1,500	0.4
U0750-1750-60A	0.74	1.38	70A	1.75	1,750	0.5
U0750-2000-60A	0.74	1.38	70A	2	2,000	0.6
U0750-(length)-60A				Any to 12		
U0750-0750-80A	0.74	1.38	80A	0.75	750	0.1
U0750-1000-80A	0.74	1.38	80A	1	1,000	0.2
U0750-1250-80A	0.74	1.38	80A	1.25	1,250	0.3
U0750-1500-80A	0.74	1.38	80A	1.5	1,500	0.4
U0750-1750-80A	0.74	1.38	80A	1.75	1,750	0.5
U0750-2000-80A	0.74	1.38	80A	2	2,000	0.6
U0750-(length)-80A				Any to 12		
U0750-0750-90A	0.74	1.38	90A	0.75	750	0.1
U0750-1000-90A	0.74	1.38	90A	1	1,000	0.2
U0750-1250-90A	0.74	1.38	90A	1.25	1,250	0.3
U0750-1500-90A	0.74	1.38	90A	1.5	1,500	0.4
U0750-1750-90A	0.74	1.38	90A	1.75	1,750	0.5
U0750-2000-90A	0.74	1.38	90A	2	2,000	0.6
U0750-2500-90A	0.74	1.38	90A	2.5	2,500	0.7
U0750-(length)-90A				Any to 12		

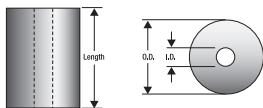


Stock Urethane Compression Springs

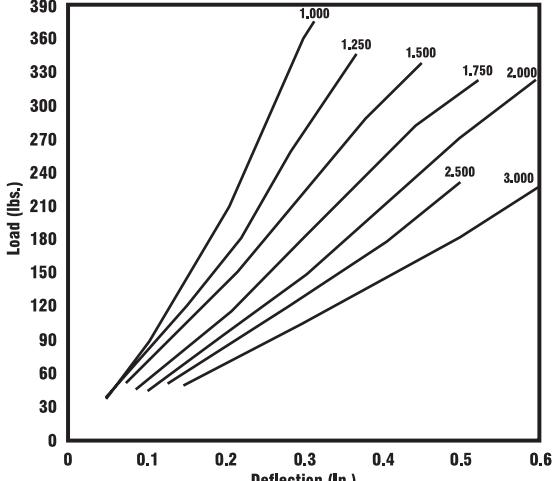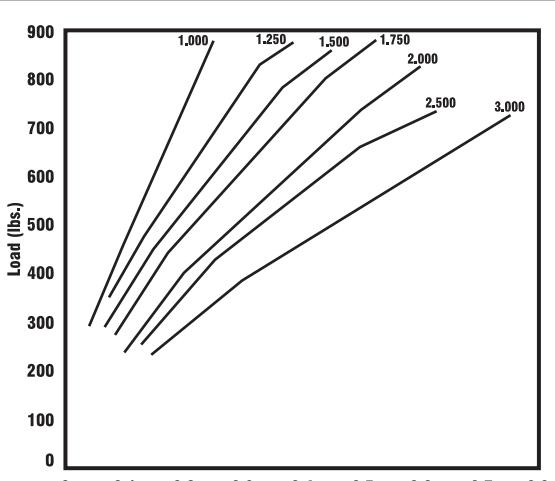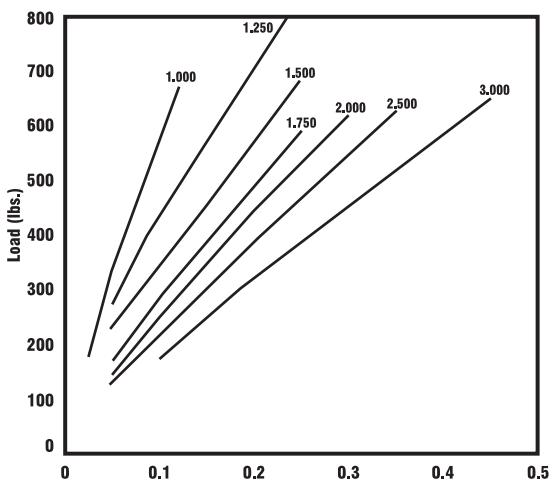Century Stock Number	Inside Dia. Inches	Outside Dia. Inches	Durometer	Free Length Approx.	
U0875-1000-60A	0.87	1.63	70A	1	
U0875-1250-60A	0.87	1.63	70A	1.25	
U0875-1500-60A	0.87	1.63	70A	1.5	
U0875-1750-60A	0.87	1.63	70A	1.75	
U0875-2000-60A	0.87	1.63	70A	2	
U0875-2500-60A	0.87	1.63	70A	2.5	
U0875-3000-60A	0.87	1.63	70A	3	
U0875-(length)-60A				Any to 12	
U0875-1000-80A	0.87	1.63	80A	1	
U0875-1250-80A	0.87	1.63	80A	1.25	
U0875-1500-80A	0.87	1.63	80A	1.5	
U0875-1750-80A	0.87	1.63	80A	1.75	
U0875-2000-80A	0.87	1.63	80A	2	
U0875-2500-80A	0.87	1.63	80A	2.5	
U0875-3000-80A	0.87	1.63	80A	3	
U0875-(length)-80A				Any to 12	
U0875-1000-90A	0.87	1.63	90A	1	
U0875-1250-90A	0.87	1.63	90A	1.25	
U0875-1500-90A	0.87	1.63	90A	1.5	
U0875-1750-90A	0.87	1.63	90A	1.75	
U0875-2000-90A	0.87	1.63	90A	2	
U0875-2500-90A	0.87	1.63	90A	2.5	
U0875-3000-90A	0.87	1.63	90A	3	
U0875-(length)-90A				Any to 12	

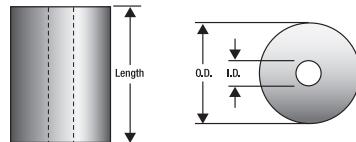

Stock Urethane Compression Springs


Century Stock Number	Inside Dia. Inches	Outside Dia. Inches	Durometer	Free Length Approx.	Load (lbs.)	Deflection (In.)
U1000-1000-60A	0.99	1.75	70A	1	1000	0.1
U1000-1250-60A	0.99	1.75	70A	1.25	1250	0.15
U1000-1500-60A	0.99	1.75	70A	1.5	1500	0.2
U1000-1750-60A	0.99	1.75	70A	1.75	1750	0.25
U1000-2000-60A	0.99	1.75	70A	2	2000	0.3
U1000-2500-60A	0.99	1.75	70A	2.5	2500	0.4
U1000-3000-60A	0.99	1.75	70A	3	3000	0.5
U1000-(length)-60A				Any to 12		
U1000-1000-80A	0.99	1.75	80A	1	1000	0.1
U1000-1250-80A	0.99	1.75	80A	1.25	1250	0.15
U1000-1500-80A	0.99	1.75	80A	1.5	1500	0.2
U1000-1750-80A	0.99	1.75	80A	1.75	1750	0.25
U1000-2000-80A	0.99	1.75	80A	2	2000	0.3
U1000-2500-80A	0.99	1.75	80A	2.5	2500	0.4
U1000-3000-80A	0.99	1.75	80A	3	3000	0.5
U1000-(length)-80A				Any to 12		
U1000-1000-90A	0.99	1.75	90A	1	1000	0.05
U1000-1250-90A	0.99	1.75	90A	1.25	1250	0.1
U1000-1500-90A	0.99	1.75	90A	1.5	1500	0.15
U1000-1750-90A	0.99	1.75	90A	1.75	1750	0.2
U1000-2000-90A	0.99	1.75	90A	2	2000	0.25
U1000-2500-90A	0.99	1.75	90A	2.5	2500	0.3
U1000-3000-90A	0.99	1.75	90A	3	3000	0.4
U1000-(length)-90A				Any to 12		

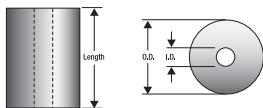

Century Spring

Urethane Springs 95A DUROMETER - APPROXIMATE LOAD TO DEFLECTION

Century Stock Number	I.D. Inches	O.D. Inches	Free Lgth. Inches	Load @ 1/8" Def. Lbs.	5%		10%		15%		20%		25%	
					Load Lbs.	Defl. Inches								
UL18X1-1/4	3/16	11/16	1-1/4	240	175	.063	240	.125	295	.188	350	.250	375	.313
UL18X1-1/2	3/16	11/16	1-1/2	220	175	.075	240	.150	295	.225	350	.300	375	.375
UL25X1-1/4	1/4	3/4	1-1/4	270	200	.063	270	.125	335	.188	395	.250	430	.313
UL25X1-1/2	1/4	3/4	1-1/2	250	200	.075	270	.150	335	.225	395	.300	430	.375
UL25X1-3/4	1/4	3/4	1-3/4	230	200	.088	270	.175	335	.263	395	.350	430	.438
UL25X2	1/4	3/4	2	220	200	.100	270	.200	335	.300	395	.400	480	.500
UL31X1-1/4	5/16	13/16	1-1/4	300	220	.063	270	.125	375	.188	445	.250	480	.313
UL31X1-1/2	5/16	13/16	1-1/2	275	220	.075	300	.150	375	.225	445	.300	480	.438
UL31X1-3/4	5/16	13/16	1-3/4	255	220	.088	300	.175	375	.263	445	.350	480	.438
UL31X2	5/16	13/16	2	245	220	.100	300	.200	375	.300	445	.400	480	.500
UL37X1-1/4	3/8	7/8	1-1/4	335	245	.063	335	.125	415	.188	490	.250	530	.313
UL37X1-1/2	3/8	7/8	1-1/2	305	245	.075	335	.150	415	.225	490	.300	530	.375
UL37X1-3/4	3/8	7/8	1-3/4	280	245	.088	335	.175	415	.263	490	.350	530	.438
UL37X2	3/8	7/8	2	270	245	.010	335	.200	415	.300	490	.400	530	.500
UL50X1-1/4	1/2	1	1-1/4	395	290	.063	395	.125	490	.188	585	.250	635	.313
UL50X1-1/2	1/2	1	1-1/2	369	290	.075	395	.150	490	.225	585	.300	635	.375
UL50X1-3/4	1/2	1	1-3/4	330	290	.088	395	.175	490	.263	585	.350	635	.438
UL50X2	1/2	1	2	315	290	.100	395	.200	490	.300	585	.400	635	.500
UL50X2-1/4	1/2	1	2-1/4	300	290	.113	395	.225	490	.338	585	.450	635	.563
UL62X1-1/4	5/8	1-1/8	1-1/4	460	335	.063	460	.125	570	.188	680	.250	735	.313
UL62X1-1/2	5/8	1-1/8	1-1/2	420	335	.075	460	.150	570	.225	680	.300	735	.375
UL62X1-3/4	5/8	1-1/8	1-3/4	385	335	.088	460	.175	570	.263	680	.350	735	.438
UL62X2	5/8	1-1/8	2	365	335	.100	460	.200	570	.300	680	.400	735	.500
UL62X2-1/4	5/8	1-1/8	2-1/4	345	335	.113	460	.225	570	.338	680	.450	735	.563
UL75X1-1/2	3/4	1-3/8	1-1/2	625	495	.075	685	.150	855	.225	1020	.300	1105	.375
UL75X1-3/4	3/4	1-3/8	1-3/4	575	495	.088	685	.175	855	.263	1020	.350	1105	.438
UL75X2	3/4	1-3/8	2	545	495	.100	685	.200	855	.300	1020	.400	1105	.500
UL75X2-1/4	3/4	1-3/8	2-1/4	515	495	.113	685	.225	855	.338	1020	.450	1105	.563
UL75X2-1/2	3/4	1-3/8	2-1/2	495	495	.125	685	.250	855	.375	1020	.500	1105	.625
UL75X2-3/4	3/4	1-3/8	2-3/4	455	495	.138	685	.275	855	.413	1020	.550	1105	.688
UL75X3	3/4	1-3/8	3	410	495	.150	685	.300	855	.450	1020	.600	1105	.750
UL87X1-1/2	7/8	1-5/8	1-1/2	875	690	.075	960	.150	1200	.225	1430	.300	1550	.375
UL87X1-3/4	7/8	1-5/8	1-3/4	875	690	.088	960	.175	1200	.263	1430	.350	1550	.438
UL87X2	7/8	1-5/8	2	765	690	.100	960	.200	1200	.300	1430	.400	1550	.500
UL87X2-1/4	7/8	1-5/8	2-1/4	720	690	.113	960	.225	1200	.338	1430	.450	1550	.563
UL87X2-1/2	7/8	1-5/8	2-1/2	690	690	.125	960	.250	1200	.375	1430	.500	1550	.625
UL87X2-3/4	7/8	1-5/8	2-3/4	630	690	.138	960	.275	1200	.413	1430	.550	1550	.688
UL87X3	7/8	1-5/8	3	570	690	.150	960	.300	1200	.450	1430	.600	1550	.750
UL100X1-1/2	1	1-3/4	1-1/2	960	755	.075	1050	.150	1320	.225	1575	.300	1705	.375
UL100X1-3/4	1	1-3/4	1-3/4	880	755	.088	1050	.175	1320	.263	1575	.350	1705	.438
UL100X2	1	1-3/4	2	840	755	.100	1050	.200	1320	.300	1575	.400	1705	.500
UL100X2-1/4	1	1-3/4	2-1/4	790	755	.113	1050	.225	1320	.338	1575	.450	1705	.563
UL100X2-3/4	1	1-3/4	2-3/4	690	755	.138	1050	.275	1320	.413	1575	.550	1705	.688
UL100X3	1	1-3/4	3	625	755	.150	1050	.300	1320	.450	1575	.600	1705	.750
UM50X1-1/4	1/2	1-1/8	1-1/4	530	385	.063	530	.125	660	.188	785	.250	850	.313
UM50X1-1/2	1/2	1-1/8	1-1/2	485	385	.075	530	.150	660	.225	785	.300	850	.375
UM50X1-3/4	1/2	1-1/8	1-3/4	445	385	.088	530	.175	660	.263	785	.350	850	.438
UM50X2	1/2	1-1/8	2	425	385	.100	530	.200	660	.300	785	.400	850	.500
UM50X2-1/4	1/2	1-1/8	2-1/4	400	385	.113	530	.225	660	.338	785	.450	850	.563
UM62X1-1/4	5/8	1-1/4	1-1/4	605	440	.063	605	.125	760	.188	905	.250	975	.313
UM62X1-1/2	5/8	1-1/4	1-1/2	555	440	.075	605	.150	760	.225	905	.300	975	.375
UM62X1-3/4	5/8	1-1/4	1-3/4	510	440	.088	605	.175	760	.263	905	.350	975	.438
UM62X2	5/8	1-1/4	2	485	440	.100	605	.200	760	.300	905	.400	975	.500
UM62X2-1/4	5/8	1-1/4	2-1/4	455	440	.113	605	.225	760	.338	905	.450	975	.563
UM75X1-1/2	3/4	1-1/2	1-1/2	790	625	.075	865	.150	1085	.225	1290	.300	1400	.375
UM75X1-3/4	3/4	1-1/2	1-3/4	720	625	.088	865	.175	1085	.263	1290	.350	1400	.438
UM75X2	3/4	1-1/2	2	690	625	.100	865	.200	1085	.300	1290	.400	1400	.500
UM75X2-1/4	3/4	1-1/2	2-1/4	650	625	.113	865	.225	1085	.338	1290	.450	1400	.563
UM75X2-1/2	3/4	1-1/2	2-1/2	625	625	.125	865	.250	1085	.375	1290	.500	1400	.688
UM75X2-3/4	3/4	1-1/2	2-3/4	570	625	.138	865	.275	1085	.413	1290	.550	1400	.688
UM75X3	3/4	1-1/2	3	515	625	.150	865	.300	1085	.450	1290	.600	1400	.750
UM87X1-1/2	7/8	1-3/4	1-1/2	1065	840	.075	1170	.150	1465	.225	1750	.300	1895	.375
UM87X1-3/4	7/8	1-3/4	1-3/4	1065	840	.088	1170	.175	1465	.263	1750	.350	1895	.438
UM87X2	7/8	1-3/4	2	930	840	.100	1170	.200	1465	.300	1750	.400	1895	.500
UM87X2-1/4	7/8	1-3/4	2-1/4	875	840	.113	1170	.225	1465	.338	1750	.450	1895	.563
UM87X2-1/2	7/8	1-3/4	2-1/2	840	840	.125	1170	.250	1465	.375	1750	.500	1895	.625
UM87X2-3/4	7/8	1-3/4	2-3/4	770	840	.138	1170	.275	1465	.413	1750	.550	1895	.688
UM87X3	7/8	1-3/4	3	695	840	.150	1170	.300	1465	.450	1750	.600	1895	.750
UM100X1-1/2	1	2	1-1/2	1385	1090	.075	1520	.150	1910	.225				
UM100X1-3/4	1	2	1-3/4	1470	1090	.088	1520	.175	1910	.263				
UM100X2	1	2	2	1210	1090	.100	1520	.200	1910	.300				
UM100X2-1/4	1	2	2-1/4	1140	1090	.113	1520	.225	1910	.338				
UM100X2-1/2	1	2	2-1/2	1090	1090	.125	1520	.250	1910	.375				
UM100X2-3/4	1	2	2-3/4	1000	1090	.138	1520	.275	1910	.413				
UM100X3	1	2	3	905	1090	.150	1520	.300	1910	.450				

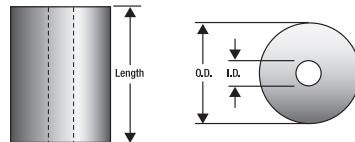

Urethane Springs 95A DUROMETER - APPROXIMATE LOAD TO DEFLECTION

Century Stock Number	I.D. Inches	O.D. Inches	Free Lgth. Inches	Load @ 1/8" Def. Lbs.	5%		10%		15%		20%		25%	
					Load Lbs.	Defl. Inches								
UH50X1-1/4	1/2	1-1/4	1-1/4	675	490	.063	675	.125	845	.188	1010	.250	1090	.313
UH50X1-1/2	1/2	1-1/4	1-1/2	620	490	.075	675	.150	845	.225	1010	.300	1090	.375
UH50X1-3/4	1/2	1-1/4	1-3/4	565	490	.088	675	.175	845	.263	1010	.350	1090	.438
UH50X2	1/2	1-1/4	2	540	490	.100	675	.200	845	.300	1010	.400	1090	.500
UH50X2-1/4	1/2	1-1/4	2-1/4	510	490	.113	675	.225	845	.338	1010	.450	1090	.563
UH62X1-1/4	5/8	1-1/2	1-1/4	1085	780	.063	1083	.125	1360	.188	1620	.250	1755	.313
UH62X1-1/2	5/8	1-1/2	1-1/2	990	780	.075	1083	.150	1360	.225	1620	.300	1755	.375
UH62X1-3/4	5/8	1-1/2	1-3/4	905	780	.088	1083	.175	1360	.263	1620	.350	1755	.438
UH62X2	5/8	1-1/2	2	865	780	.100	1083	.200	1360	.300	1620	.400	1755	.500
UH62X2-1/4	5/8	1-1/2	2-1/4	815	780	.113	1083	.225	1360	.338	1620	.450	1755	.563
UH75X1-1/2	3/4	1-3/4	1-1/2	1160	915	.075	1270	.150	1595	.225	1905	.300	2065	.375
UH75X1-3/4	3/4	1-3/4	1-3/4	1060	915	.088	1270	.175	1595	.263	1905	.350	2065	.438
UH75X2	3/4	1-3/4	2	1010	915	.100	1270	.200	1595	.300	1905	.400	2065	.500
UH75X2-1/4	3/4	1-3/4	2-1/4	955	915	.113	1270	.225	1595	.338	1905	.450	2065	.563
UH75X2-1/2	3/4	1-3/4	2-1/2	915	915	.125	1270	.250	1595	.375	1905	.500	2065	.625
UH75X2-3/4	3/4	1-3/4	2-3/4	835	915	.138	1270	.275	1595	.413	1905	.550	2065	.688
UH75X3	3/4	1-3/4	3	755	915	.150	1270	.300	1595	.450	1905	.600	2065	.750
UH87X1-1/2	7/8	2	1-1/2	1495	1175	.075	1640	.150	2055	.225				
UH87X1-3/4	7/8	2	1-3/4	1365	1175	.088	1640	.175	2055	.263				
UH87X2	7/8	2	2	1305	1175	.100	1640	.200	2055	.300				
UH87X2-1/4	7/8	2	2-1/4	1225	1175	.113	1640	.225	2055	.338				
UH87X2-1/2	7/8	2	2-1/2	1175	1175	.125	1640	.250	2055	.375				
UH87X2-3/4	7/8	2	2-3/4	1075	1175	.138	1640	.275	2055	.413				
UH87X3	7/8	2	3	975	1175	.150	1640	.300	2055	.450				
UH100X1-1/2	1	2-1/4	1-1/2	1870	1470	.075	2050	.150	2580	.225				
UH100X1-3/4	1	2-1/4	1-3/4	1710	1470	.088	2050	.175	2580	.263				
UH100X2	1	2-1/4	2	1630	1470	.100	2050	.200	2580	.300				
UH100X2-1/4	1	2-1/4	2-1/4	1535	1470	.113	2050	.225	2580	.338				
UH100X2-1/2	1	2-1/4	2-1/2	1470	1470	.125	2050	.250	2580	.375				
UH100X2-3/4	1	2-1/4	2-3/4	1345	1470	.138	2050	.275	2580	.413				
UH100X3	1	2-1/4	3	1215	1470	.150	2050	.300	2580	.450				
UH125X2	1-1/4	2-1/2	2	1880	1695	.100	2680	.200	3115	.300				
UH125X2-1/4	1-1/4	2-1/2	2-1/4	1770	1695	.113	2680	.225	3115	.338				
UH125X2-1/2	1-1/4	2-1/2	2-1/2	1695	1695	.125	2365	.250	3115	.375				
UH125X2-3/4	1-1/4	2-1/2	2-3/4	1550	1695	.138	2365	.275	3115	.413				
UH125X3	1-1/4	2-1/2	3	1400	1695	.150	2365	.300	3115	.450				
UH150X2	1-1/2	2-3/4	2	2125	1920	.100	2680	.200	3365	.300				
UH150X2-1/4	1-1/2	2-3/4	2-1/4	2000	1920	.113	2680	.225	3365	.338				
UH150X2-1/2	1-1/2	2-3/4	2-1/2	1920	1920	.125	2680	.250	3365	.375				
UH150X2-3/4	1-1/2	2-3/4	2-3/4	1750	1920	.138	2680	.275	3365	.413				
UH150X3	1-1/2	2-3/4	3	1585	1920	.150	2680	.300	3365	.450				

Spring Assortments

Mixed Assortments

#1 Mixed Assortment

Mix of small springs
Weight Varies



#2 Mixed Assortment

Mix of small & slightly larger springs
Weight Varies



#3 Mixed Assortment

Mix of medium springs
4 Lbs.



#4 Mixed Assortment

Mix of medium & slightly larger springs
10 Lbs.



#5 Mixed Assortment


Mix of large & medium springs
20 Lbs.



Torsion Assortments

Mixed Torsion Springs


Variety of sizes, leg positions and wire diameters
1 Lb.

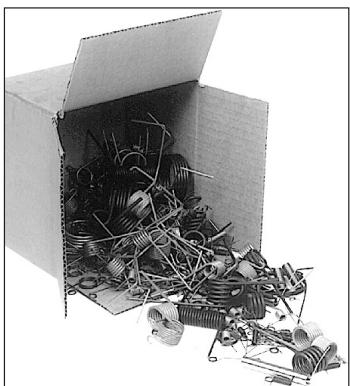

Stainless Assortments

Mixed Springs


Mostly compression springs
2 Lbs.

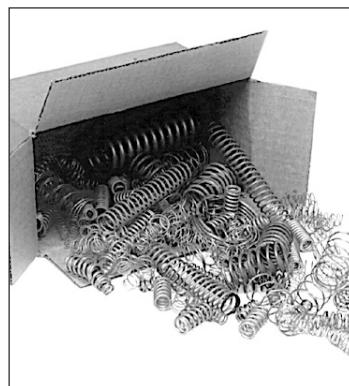

Compression Assortments

Light Compression

174 Springs - 58 Sizes

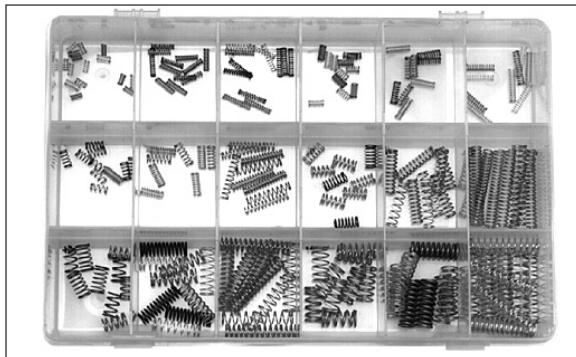

Medium Compression

144 Springs - 48 Sizes



Material	O.D. Inches	Length Inches	Wire Dia. Inches	Rate Lbs./In.
SPRING STEEL	0.125 to 0.375	0.25 to 1.50	0.007 to 0.072	0.10 to 173

Material	O.D. Inches	Length Inches	Wire Dia. Inches	Rate Lbs./In.
SPRING STEEL	0.406 to 0.593	0.50 to 2.00	0.028 to 0.088	0.50 to 417


Heavy Compression

83 Springs - 43 Sizes



Long Length Compression

8 Springs - 8 Sizes

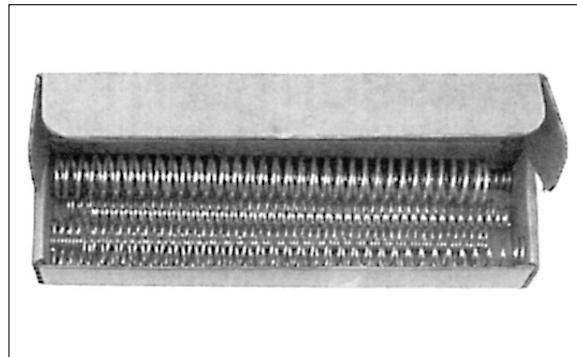


Material	O.D. Inches	Length Inches	Wire Dia. Inches	Rate Lbs./In.
SPRING STEEL	0.625 to 1.00	0.625 to 3.75	0.04 to 0.135	3.4 to 630

Material	O.D. Inches	Length Inches	Wire Dia. Inches	Rate Lbs./In.
SPRING STEEL	0.375 to 1.250	All 12" Long	0.062 to 0.135	2.05 to 13.12

Extension Assortments

Light Extension

162 Springs - 54 Sizes

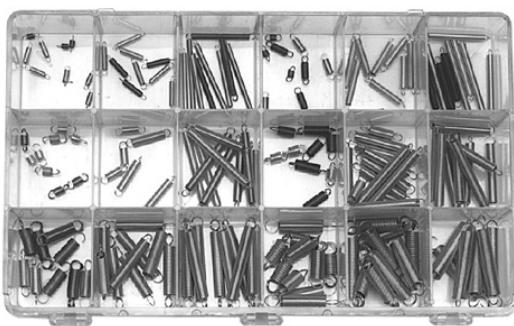

Medium/Heavy Extension

93 Springs - 36 Sizes




Material	O.D. Inches	Length Inches	Wire Dia. Inches	Rate Lbs./In.
SPRING STEEL	0.125 to 0.312	0.438 to 2.00	0.010 to 0.039	0.17 to 83

Material	O.D. Inches	Length Inches	Wire Dia. Inches	Rate Lbs./In.
SPRING STEEL	0.44 to 0.56	1.0 to 4.0	0.028 to 0.125	0.10 to 242

Long Length Extension

6 Springs - 6 Sizes

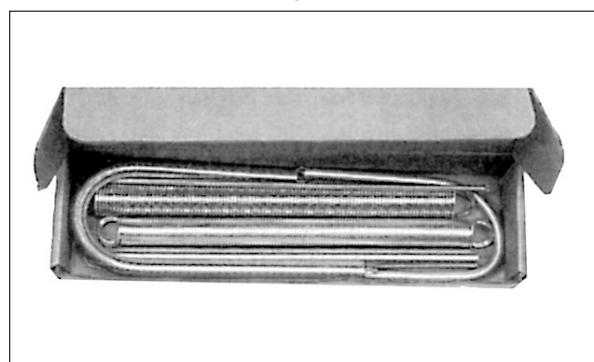

Material	O.D. Inches	Length Inches	Wire Dia. Inches	Rate Lbs./In.
SPRING STEEL	0.188 to 1.00	11.50 to 16.50	0.25 to .105	.017 to 2.41

Specialty Springs


Century Spring carries thousands of springs designed for industrial use, but we also carry many springs for personal use. Pictured below are some of the most commonly replaced springs for chaise lounges, trampolines, and porch swings. Measure your spring and select the part number, then call us toll free at 800-237-5225 and place your order. We ship same day.

Screen Door Springs




Century Part Number	O.D. Inches	Length Inches	Wire Dia. Inches	Rate Lbs./In.
654	9/16	16-1/2	0.054	0.3
6103	5/16	16-1/8	0.047	1.1
6104	3/8	16-3/8	0.054	1.3
6105	13/32	16-3/8	0.058	1.4
6106	15/32	16-3/8	0.062	1.2
6107	1/2	16-3/8	0.072	2.3

Chaise Lounge Springs

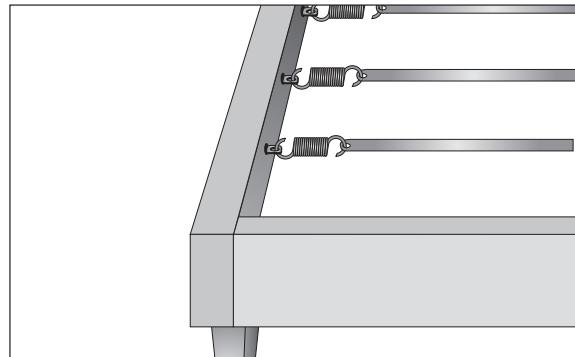

Century Part Number	O.D. Inches	Length Inches	Wire Dia. Inches	Rate Lbs./In.
5665	.734	1-3/4	.105	94
0316	.734	2	.105	88
316	.734	2-1/4	.105	59
317	.734	2-7/16	.105	50
318	.734	2-5/8	.105	44
319	.734	2-7/8	.105	39
89	.750	3-1/8	.105	33
77	.750	3-3/4	.105	26


Trampoline Springs

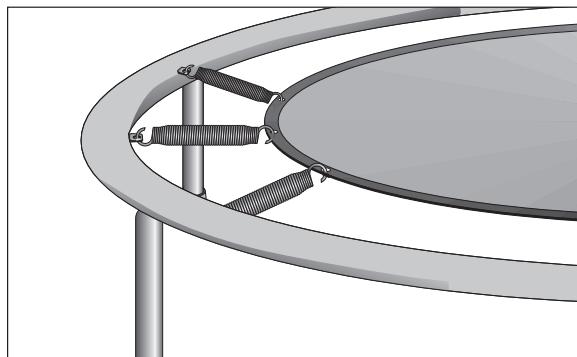

Century Part Number	O.D. Inches	Length Inches	Wire Dia. Inches	Rate Lbs./In.	Max. Load Lbs.
5699	13/16	3-1/4	.125	72	77
5697	29/32	3-3/8	.135	69	114
6087	1-1/8	8-1/4	.125	6	65

See drawbar section on page 521 of this catalog for additional selections.

Drawbar Porch Swing Springs

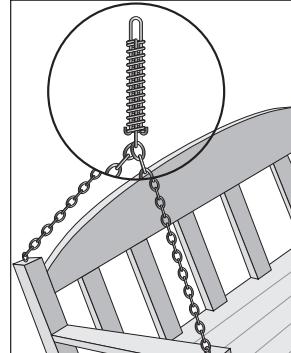

Century Part Number	O.D. Inches	Length Inches	Wire Dia. Inches	Rate Lbs./In.	Max. Load Lbs.
DB7010	1-9/16	7-1/4	.227	152	330



Metric Conversions

Compression, Extension and Flat Spring Loads (force)

1	gram (gm)	=	0.0353 oz	=	0.0022 Lbs.	=	0.0098 N
1	kilogram (kgm)	=	35.2740 oz	=	2.2046 Lbs.	=	9.8066 N
1	ounce (oz)	=	28.3495 gm	=	0.0283 kgm	=	0.2780 N
1	pound (Lbs.)	=	453.5924 gm	=	0.4536 kgm	=	4.4482 N
1	newton (N)	=	3.5969 oz	=	0.2248 Lbs.	=	102.0 gm = 0.102 kgm

Torsion Spring Loads (Torque)

1	oz-in	=	28.3495 gm-in 7.0616 N-mm	=	72.0079 gm-cm 0.0071 N-m	=	0.0625 lbf-in
1	lbf-in	=	16. oz-in 453.5924 gm-in	=	1152.1247 gm-cm 112.9848 N-mm	=	1.1521 kgm-cm 0.1130 N-m
1	N-m	=	141.6119 oz-in 0.1020 kgm-m	=	8.8507 lbf-in	=	10.1972 kgm-cm
1	kgm-cm	=	13.8880 oz-in	=	0.8680 lbf-in	=	0.0981 N-m

For Stress

1	Pascal (Pa)	=	1 N/m ²	=	0.000145 lbs/in ²
1	lbs/in ²	=	6894.7570 Pa	=	0.0703 kgm per cm ² (100,000 psi = 689.47570 MPa)
1	kgm per cm ²	=	98,066.5 Pa	=	14.2233 psi
1	MegaPascal (MPa)	=	1,000,000 Pa	=	1 MegaNewton/m ² = 145.0377 psi

For Lengths

1	mm	=	0.03937 in
1	cm	=	0.3937 in
1	in	=	25.4 mm = 2.54 cm
1	m	=	39.37 in

Conversion of Forces

oz	lbs	gm	n	gm	oz	lbs	N
1/64	.001	.443	.0043	.1	.0035	.00022	.00098
1/32	.0019	.886	.0087	.2	.0071	.00044	.00196
1/16	.0039	1.772	.0174	.3	.0106	.00066	.00294
1/8	.0078	3.544	.0348	.5	.0176	.00110	.00490
1/4	.0156	7.087	.0695	1	.0353	.0022	.0098
1/2	.0313	14.175	.1390	2	.0705	.0044	.0196
1	.0625	28.350	.278	3	.1058	.0066	.0294
2	.125	56.699	.556	4	.1411	.0088	.0392
3	.1875	85.049	.834	5	.1764	.0110	.0490
4	.250	113.398	1.112	10	.3527	.0220	.0981
5	.3125	141.748	1.390	15	.5291	.0331	.1471
10	.625	283.495	2.780	25	.8818	.0551	.2452

lbs	oz	gm	n	N	oz	lbs	gm
.1	1.6	45.359	.4448	.1	.3597	.0225	10.20
.2	3.2	90.718	.8896	.2	.7194	.0450	20.39
.3	4.8	136.08	1.334	.3	1.0791	.0674	30.59
.5	8.0	226.80	2.224	.5	1.7985	.1124	50.99
1	16	453.59	4.448	1	3.597	.2248	101.97
2	32	907.18	8.896	2	7.194	.4496	203.94
3	48	1,360.78	13.345	3	10.791	.6744	305.91
4	64	1,814.37	17.793	4	14.388	.8992	407.89
5	80	2,267.96	22.241	5	17.985	1.1240	509.86
10	160	4,535.92	44.482	10	35.969	2.2481	1,019.72
15	240	6,803.89	66.723	15	53.954	3.3721	1,529.57
25	400	11,393.81	111.206	25	89.924	5.6202	2,549.29

Fraction To Decimal Conversion

1/64	.015625	33/64	.515625
1/32	.03125	17/32	.53125
3/64	.046875	35/64	.546875
1/16	.0625	9/16	.5625
5/64	.078125	37/64	.578125
3/32	.09375	19/32	.59375
7/64	.109375	39/64	.609375
1/8	.125	5/8	.625
9/64	.140625	41/64	.640625
5/32	.15625	21/32	.65625
11/64	.171875	43/64	.671875
3/16	.1875	11/16	.6875
13/64	.203125	45/64	.703125
7/32	.21875	23/32	.71875
15/64	.234375	47/64	.734375
1/4	.25	3/4	.75
17/64	.265625	49/64	.765625
9/32	.28125	25/32	.78125
19/64	.296875	51/64	.796875
5/16	.3125	13/16	.8125
21/64	.328125	53/64	.828125
11/32	.34375	27/32	.84375
23/64	.359375	55/64	.859375
3/8	.375	7/8	.875
25/64	.390625	57/64	.890625
13/32	.40625	29/32	.90625
27/64	.421875	59/64	.921875
7/16	.4375	15/16	.9375
29/64	.453125	61/64	.953125
15/32	.46875	31/32	.96875
31/64	.484375	31/64	.984375
1/2	.5	1	1.

Minimum Tensile Strength Of Wire Spring Materials

Ferrous in psi x 10³

Wire Dia. In.	Music Wire	Hard Drawn	Oil Temp.	Wire Dia. In.	Music Wire	Hard Drawn	Oil Temp.	Wire Dia. In.	Music Wire	Hard Drawn	Oil Temp.
0.008	399	307	315	0.048	306	247		0.099	274		
0.009	393	305	313	0.049	306	246		0.100	271		
0.010	387	303	311	0.050	306	245		0.101	271		
0.011	382	301	309	0.051	303	244		0.102	270		
0.012	377	299	307	0.052	303	244		0.105	270	216	225
0.013	373	297	305	0.053	303	243		0.106	268		
0.014	369	295	303	0.054	303	243	253	0.109	268		
0.015	365	293	301	0.055	300	242		0.110	267		
0.016	362	291	300	0.056	300	241		0.111	267		
0.017	362	289	298	0.057	300	240		0.112	266		
0.018	356	287	297	0.058	300	240		0.119	266		
0.019	356	285	295	0.059	296	239		0.120	263	210	220
0.020	350	283	293	0.060	296	238		0.123	263		
0.021	350	281		0.061	296	237		0.124	261		
0.022	345	280		0.062	296	237	247	0.129	261		
0.023	345	278	289	0.063	293	236		0.130	258		
0.024	341	277		0.064	293	235		0.135	258	206	215
0.025	341	275	286	0.065	293	235		0.139	258		
0.026	337	274		0.066	290			0.140	256		
0.027	337	272		0.067	290	234		0.144	256		
0.028	333	271	283	0.069	290	233		0.145	254		
0.029	333	267		0.070	289			0.148	254	203	210
0.030	330	266		0.071	288			0.149	253		
0.031	330	266	280	0.072	287	232	241	0.150	253		
0.032	327	265		0.074	287	231		0.151	251		
0.033	327	264		0.075	287			0.160	251		
0.034	324	262		0.076	284	230		0.161	249		
0.035	324	261	274	0.078	284	229		0.162	249	200	205
0.036	321	260		0.079	284			0.177	245	195	200
0.037	321	258		0.080	282	227	235	0.192	241	192	195
0.038	318	257		0.083	282			0.207	238	190	190
0.039	318	256		0.084	279			0.225	235	186	188
0.040	315	255		0.085	279	225		0.250	230	182	185
0.041	315	255	266	0.089	279			0.3125	174	183	
0.042	313	254		0.090	276	222		0.375	167	180	
0.043	313	252		0.091	276		230	0.4375	165	175	
0.044	313	251		0.092	276	220		0.500	156	170	
0.045	309	250		0.093	276						
0.046	309	249		0.094	274						
0.047	309	248	259	0.095	274	219					

Minimum Tensile Strength Of Wire Spring Materials

Stainless Steel in psi x 10³

Wire Dia. Inches	302 SST	17-7 sst	Wire Dia. Inches	302 SST	17-7 sst	Wire Dia. Inches	302 SST	17-7 sst
.008	325	345	.033	276		.061	255	305
.009	325		.034	275		.062	255	297
.010	320	345	.035	274		.063	254	
.011	318	340	.036	273		.065	254	
.012	316		.037	272		.066	250	
.013	314		.038	271		.071	250	297
.014	312		.039	270		.072	250	292
.015	310	340	.040	270		.075	250	
.016	308	335	.041	269	320	.076	245	
.017	306		.042	268	310	.080	245	292
.018	304		.043	267		.092	240	279
.019	302		.044	266		.105	232	274
.020	300	335	.045	264		.120	225	272
.021	298	330	.046	263		.125	225	
.022	296		.047	262		.131	260	
.023	294		.048	262		.148	210	256
.024	292		.049	261		.162	205	256
.025	290	330	.051	261	310	.177	195	
.026	289	325	.052	260	305	.192		
.027	287		.055	260		.207	185	
.028	286		.056	259		.225	180	
.029	284		.057	258		.250	175	
.030	282	325	.058	258		.375	140	
.031	280	320	.059	257				
.032	277		.060	256				

Can't find what you're looking for? Request a custom quote. Email customquote@centuryspring.com

Copper-Base Alloys

in psi x 10³

Phosphor Bronze (Grade A)	
Wire Dia. Range – in. (mm)	
0.007-0.025 (0.18-0.64)	145
0.025-0.062 (10.65-1.53)	135
0.063 and over (1.59 and over)	130
Beryllium copper (alloy 25 pretemp)	
0.005-0.040 (0.13-1.02)	180
0.041 and over (1.03 and over)	170
Spring Brass all sizes	129

Nickel-Base Alloys

in psi x 10³

Inconel (Spring Temper)	
Wire Dia. Range – in. (mm)	
up to 0.057 (1.45)	185
0.057-0.114 (1.46-2.89)	175
0.114-318 (2.90-8.08)	170
Inconel X Spring Temper	
190	After Aging 220



Properties Of Common Spring Materials

Material	Nominal Analysis	Tensile Properties		Torsional Properties ²			Maximum Temperature	Method of Manufacture Chief Uses Special Properties
		Minimum Tensile Strength P.s.i. X 10 ³	Modulus Elasticity E P.s.i. X 10 ⁶	Design Stress ¹ % Minimum Tensile	Modulus In Torsion G P.S.I. X 10 ⁶	°F °C		
Music Wire ASTM A 228	C Mn .70-1.00% .20-.60%	230-399	30	45	11.5	250	121 C41-60	Cold drawn high and uniform tensile. High quality springs and wire forms.
Hard Drawn ASTM A 227	C Mn .45-.85% .60-1.30%	CL1147-283 CL1171-234	30	40	11.5	250	121 C 31-52	Cold drawn. Average stress applications. Lower cost springs and wire forms.
Oil Tempered ASTM A 229	C Mn .55-.85% .60-1.20%	CL1165-293 CL1191-324	30	45	11.5	250	121 C42-55	Cold drawn and heat treated before fabrication. General purpose spring wire.
Chrome Vanadium ASTM A 231	C Cr V .48-.53% .80-1.10% .15 Min%	190-300	30	45	11.5	425	218.5 C41-55	Cold drawn and heat treated before fabrication. Used for shock loads and moderately elevated temperature.
Chrome Silicon ASTM A 401	C Mn Si .51-.59% .60-.80% 1.20-1.60%	235-300	30	45	11.5	475	246 C48-55	Cold drawn and heat treated before fabrication. Used for shock loads and moderately elevated temperature.
AISI 302/304 ASTM A 313	Cr Ni .17-19% 8-.10%	125-325	28	30-40	10	550	288 C35-45	Cold drawn general purpose corrosion and heat resistant. Magnetic in spring temper.
AISI 316 ASTM A 313	Cr Ni Mo .16-18% .10-14% 2.-3.%	110-245	28	40	10	550	288 C35-45	Cold drawn. Heat resistant and better corrosion resistance than 302. Magnetic in spring temper.
Phosphor Bronze Grade A ASTM B 159	Cu Sn 94-96% 4.6.%	105-145	15	40	6.25	200	93.3 B98-104	Cold drawn. Good corrosion resistance and electrical conductivity.
Beryllium Copper ASTM B 197	Cu Be 98% 2%	150-230	18.5	45	7.0	400	204 C35-42	Cold drawn and may be mill hardened before fabrication. Good corrosion resistance and electrical conductivity. High physicals.
Non-Ferrous Alloy Wire								

1. See "Minimum Tensile Strength of Wire Material" in this catalog. 2. Maximum design stress target for wire in bending (torsion springs) is usually 75% of MTS.

Glossary of Spring Terminology

Active coils (n): Those coils which are free to deflect under load.

Closed ends: Ends of compression springs where pitch of the end coils is reduced so that the end coils touch.

Closed and ground ends: The closed ends of a spring, ground to provide a flat plane.

Close-wound: Coiled with adjacent coils touching.

Coils per inch: See Pitch.

Deflection: Motion of spring ends under the application or removal of an external load (P).

Elastic limit: Maximum stress to which a material may be subjected without permanent set.

Free angle: Angle between the arms of a torsion spring when the spring is not loaded.

Free length (L): The overall length of a spring in the unloaded position.

Heat setting: Fixturing a spring at elevated temperature to minimize loss of load at operating temperature.

Helix: The spiral form of compression, extension, and torsion springs.

Hooks: Open loops or ends of extension springs.

Hydrogen embrittlement: Hydrogen absorbed in electroplating or pickling of carbon steels, tending to make the spring material brittle and susceptible to cracking and failure; particularly under sustained loads.

Initial tension: The force that tends to keep the coils of an extension spring closed and which must be overcome before the coils start to open.

Load (P): The force applied to a spring, usually in pounds or Newtons.

Loops: Coil-like wire shapes at the ends of extension springs that provide for attachment and force application.

Mean coil diameter (D): Outside spring diameter (O.D.) minus one wire diameter (d).

Modulus in shear or torsion (G): Coefficient of elasticity used for extension and compression springs.

Modulus in bending (E): Coefficient of elasticity used for torsion springs.

Moment (M): See Torque.

Open ends, not ground: End of a compression spring with a constant pitch for each coil.

Open ends, ground: "Open ends, not ground" followed by an end-grinding operation.

Passivating: Acid treatment of stainless steel to remove contaminants and improve corrosion resistance.

Permanent set: A material that is deflected so far that its elastic properties have been exceeded and it does not return to its original condition upon release of load is said to have taken a "permanent set".

Pitch (p): The distance from center to center of the wire in adjacent active coils. Recommended practice is to specify number of active coils rather than pitch.

Rate (R): Change in load-per-unit deflection, generally given in pounds per inch.

Remove set: The process of closing to solid height a compression spring which has been coiled longer than the desired finished length, so as to increase the apparent elastic limit.

Residual stress: Stresses induced by set removal, shot peening, cold working, forming or other means. These stresses may or may not be beneficial, depending on the application.

Set: Permanent distortion which occurs when a spring is stressed beyond the elastic limit of the material.

Solid length: Length of a compression spring when under sufficient load to bring all coils into contact with adjacent coils.

Spring index: Ratio of mean coil diameter (D) to wire diameter (d).

Squared and ground ends: See Closed and ground ends.

Squared ends: See Closed ends.

Stress range: The difference in operating stresses at minimum and maximum loads.

Stress relieve: To subject springs to low-temperature heat treatment so as to relieve residual stresses.

Shot peening: A cold-working process in which the material surface is peened to induce compressive stresses and thereby improve fatigue life.

Torque (M): A twisting motion applied to torsion springs which tends to produce rotation. Equal to the load multiplied by the distance (or moment arm) from the load to the axis of the spring body. Usually expressed in inch-pounds.

Total number of coils (N): Number of active coils plus closed coils/ends.

Lee Spring / Century Spring Part Numbers

Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
Compression Springs			
C-021AB-1	70206	C-022A-3S	70173S
C-021AB-10	70215	C-022A-4	70174
C-021AB-10S	70215S	C-022A-5	70175
C-021AB-11	70217	C-022A-5S	70175S
C-021AB-11S	70217S	C-022A-6	70176
C-021AB-12	70218	C-022A-6S	70176S
C-021AB-12S	70218S	C-022A-7	70177
C-021AB-13	70221	C-022A-7S	70177S
C-021AB-13S	70221S	C-022A-8	70178
C-021AB-14	70224	C-022A-8S	70178S
C-021AB-14S	70224S	C-022A-9	70179
C-021AB-1S	70206S	C-022A-9S	70179S
C-021AB-2	70207	C-023AB-1	70225
C-021AB-2S	70207S	C-023AB-10	70234
C-021AB-3	70208	C-023AB-10S	70234S
C-021AB-3S	70208S	C-023AB-11	70236
C-021AB-4	70209	C-023AB-11S	70236S
C-021AB-4S	70209S	C-023AB-12	70237
C-021AB-5	70210	C-023AB-12S	70237S
C-021AB-5S	70210S	C-023AB-13	70240
C-021AB-6	70211	C-023AB-13S	70240S
C-021AB-6S	70211S	C-023AB-14	70243
C-021AB-7	70212	C-023AB-14S	70243S
C-021AB-7S	70212S	C-023AB-1S	70225S
C-021AB-8	70213	C-023AB-2	70226
C-021AB-8S	70213S	C-023AB-2S	70226S
C-021AB-9	70214	C-023AB-3	70227
C-021AB-9S	70214S	C-023AB-3S	70227S
C-022A-1	70171	C-023AB-4	70228
C-022A-10	70180	C-023AB-4S	70228S
C-022A-10S	70180S	C-023AB-5	70229
C-022A-11	70183	C-023AB-5S	70229S
C-022A-11S	70183S	C-023AB-6	70230
C-022A-12	70184	C-023AB-6S	70230S
C-022A-12S	70184S	C-023AB-7	70231
C-022A-13	70185	C-023AB-7S	70231S
C-022A-13S	70185S	C-023AB-8	70232
C-022A-14	70186	C-023AB-8S	70232S
C-022A-14S	70186S	C-023AB-9	70233
C-022A-15	70189	C-023AB-9S	70233S
C-022A-15S	70189S	C-024A-1	70190
C-022A-1S	70171S	C-024A-10	70199
C-022A-2	70172	C-024A-10S	70199S
C-022A-2S	70172S	C-024A-11	70200
C-022A-3	70173	C-024A-11S	70200S

Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
C-024A-12S	70201S	CI-0088B-1S	70027S	LC-014A-3S	70092S
C-024A-13	70202	CI-008A-1	70018	LC-014A-4	70093
C-024A-13S	70202S	CI-008A-1S	70018S	LC-014A-4S	70093S
C-024A-14	70203	CI-008A-2	70019	LC-014A-5	70094
C-024A-14S	70203S	CI-008A-2S	70019S	LC-014A-5S	70094S
C-024A-15	70204	CI-008A-3	70020	LC-014A-6	70095
C-024A-15S	70204S	CI-008A-3S	70020S	LC-014A-6S	70095S
C-024A-16	70205	CI-008A-4	70021	LC-014A-7	70096
C-024A-16S	70205S	CI-008A-4S	70021S	LC-014A-7S	70096S
C-024A-1S	70190S	CI-008A-5	70022	LC-014A-8	70097
C-024A-2	70191	CI-008A-5S	70022S	LC-014A-8S	70097S
C-024A-2S	70191S	CI-008A-6	70023	LC-014A-9	70098
C-024A-3	70192	CI-008A-6S	70023S	LC-014A-9S	70098S
C-024A-3S	70192S	CI-008A-7	70024	LC-014B-1	70259
C-024A-4	70193	CI-008A-7S	70024S	LC-014B-10	70270
C-024A-4S	70193S	CI-008A-8	70025	LC-014B-10S	70270S
C-024A-5	70194	CI-008A-8S	70025S	LC-014B-11	70273
C-024A-5S	70194S	CI-008A-9	70026	LC-014B-11S	70273S
C-024A-6	70195	CI-008A-9S	70026S	LC-014B-12	70279
C-024A-6S	70195S	CI-008B-2	70028	LC-014B-12S	70279S
C-024A-7	70196	CI-008B-2S	70028S	LC-014B-13	70277
C-024A-7S	70196S	CI-008B-3	70029	LC-014B-13S	70277S
C-024A-8	70197	CI-008B-3S	70029S	LC-014B-14	70278
C-024A-8S	70197S	CI-008B-4	70030	LC-014B-14S	70278S
C-024A-9	70198	CI-008B-4S	70030S	LC-014B-1S	70259S
C-024A-9S	70198S	CI-008B-5	70031	LC-014B-2	70260
CI-006A-1	70000	CI-008B-5S	70031S	LC-014B-2S	70260S
CI-006A-1S	70000S	CI-008B-6	70032	LC-014B-3	70261
CI-006A-2	70001	CI-008B-6S	70032S	LC-014B-3S	70261S
CI-006A-2S	70001S	CI-008B-7	70033	LC-014B-4	70262
CI-006A-3	70002	CI-008B-7S	70033S	LC-014B-4S	70262S
CI-006A-3S	70002S	CI-008B-8	70034	LC-014B-5	70263
CI-006A-4	70003	CI-008B-8S	70034S	LC-014B-5S	70263S
CI-006A-4S	70003S	CI-008B-9	70035	LC-014B-6	70264
CI-006A-5	70004	CI-008B-9S	70035S	LC-014B-6S	70264S
CI-006A-5S	70004S	CI-010B-1	70036	LC-014B-7	70265
CI-006A-6	70005	CI-010B-10	70045	LC-014B-7S	70265S
CI-006A-6S	70005S	CI-010B-10S	70045S	LC-014B-8	70266
CI-006A-7	70006	CI-010B-11	70046	LC-014B-8S	70266S
CI-006A-7S	70006S	CI-010B-11S	70046S	LC-014B-9	70267
CI-006A-8	70007	CI-010B-1S	70036S	LC-014B-9S	70267S
CI-006A-8S	70007S	CI-010B-2	70037	LC-016A-1	70110
CI-006A-9	70008	CI-010B-2S	70037S	LC-016A-10	70125
CI-006A-9S	70008S	CI-010B-3	70038	LC-016A-10S	70125S
CI-007A-1	70009	CI-010B-3S	70038S	LC-016A-11	70126
CI-007A-1S	70009S	CI-010B-4	70039	LC-016A-11S	70126S
CI-007A-2	70010	CI-010B-4S	70039S	LC-016A-12	70127
CI-007A-2S	70010S	CI-010B-5	70040	LC-016A-12S	70127S
CI-007A-3	70011	CI-010B-5S	70040S	LC-016A-13	70130
CI-007A-3S	70011S	CI-010B-6	70041	LC-016A-13S	70130S
CI-007A-4	70012	CI-010B-6S	70041S	LC-016A-13S	70130S
CI-007A-4S	70012S	CI-010B-7	70042	LC-016A-2	70111
CI-007A-5	70013	CI-010B-7S	70042S	LC-016A-2S	70111S
CI-007A-5S	70013S	CI-010B-8	70043	LC-016A-3	70112
CI-007A-6	70014	CI-010B-8S	70043S	LC-016A-3S	70112S
CI-007A-6S	70014S	CI-010B-9	70044	LC-016A-4	70113
CI-007A-7	70015	CI-010B-9S	70044S	LC-016A-4S	70113S
CI-007A-7S	70015S	CI-012B-1	70047	LC-016A-5	70114
CI-007A-8	70016	CI-012B-10	70057	LC-016A-5S	70114S
CI-007A-8S	70016S	CI-012B-10S	70057S	LC-016A-6	70115
CI-007A-9	70017	CI-012B-1S	70047S	LC-016A-6S	70115S
CI-007A-9S	70017S	CI-012B-2	70048	LC-016A-7	70116
CI-0088B-1	70027	CI-012B-2S	70048S	LC-016A-7S	70116S
		CI-012B-3	70049	LC-016A-8	70117
		CI-012B-3S	70049S	LC-016A-8S	70117S
		CI-012B-4	70050	LC-016A-9	70118
		CI-012B-4S	70050S	LC-016A-9S	70118S
		CI-012B-5	70051	LC-016B-1	70280
		CI-012B-5S	70051S	LC-016B-10	70291
		CI-012B-6	70052	LC-016B-10S	70291S
		CI-012B-6S	70052S	LC-016B-11	70294
		CI-012B-7	70053	LC-016B-11S	70294S
		CI-012B-7S	70053S	LC-016B-12	70297
		CI-012B-8	70054	LC-016B-12S	70297S
		CI-012B-8S	70054S	LC-016B-13	70298
		CI-012B-9	70055	LC-016B-13S	70298S
		CI-012B-9S	70055S	LC-016B-14	70299
		LC-014A-1	70090	LC-016B-14S	70299S
		LC-014A-10	70103	LC-016B-15	70300
		LC-014A-10S	70103S	LC-016B-15S	70300S
		LC-014A-11	70104	LC-016B-16	70280S
		LC-014A-11S	70104S	LC-016B-2	70281
		LC-014A-12	70105	LC-016B-2S	70281S
		LC-014A-12S	70105S	LC-016B-3	70282
		LC-014A-13	70108	LC-016B-3S	70282S
		LC-014A-13S	70108S	LC-016B-4	70283
		LC-014A-1S	70090S	LC-016B-4S	70283S
		LC-014A-2	70091	LC-016B-5	70284
		LC-014A-2S	70091S	LC-016B-5S	70284S
		LC-014A-3	70092	LC-016B-6	70285

Type in any competitor part number in our search box. If you don't find what you're looking for, please email us at customquote@centuryspring.com
 Order online CenturySpring.com

Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
LC-016B-6S	70285S	LC-018C-8S	70543S	LC-020C-7S	70561S	LC-022C-8S	70586S	LC-024C-8S	70607S
LC-016B-7	70286	LC-018C-9	70544	LC-020C-8	70562	LC-022C-9	70591	LC-024C-9	70608
LC-016B-7S	70286S	LC-018C-9S	70544S	LC-020C-8S	70562S	LC-022C-9S	70591S	LC-024C-9S	70608S
LC-016B-8	70287	LC-020A-1	70153	LC-020C-9	70563	LC-022D-0	70780	LC-026B-1	70386
LC-016B-8S	70287S	LC-020A-10	70162	LC-020C-9S	70563S	LC-022D-00	70779	LC-026B-10	70395
LC-016B-9	70288	LC-020A-10S	70162S	LC-022B-1	70343	LC-022D-00S	70779S	LC-026B-10S	70395S
LC-016B-9S	70288S	LC-020A-11	70164	LC-022B-10	70352	LC-022D-0S	70780S	LC-026B-11	70396
LC-018A-1	70132	LC-020A-11S	70164S	LC-022B-10S	70352S	LC-022D-1	70781	LC-026B-11S	70396S
LC-018A-10	70147	LC-020A-12	70165	LC-022B-11	70355	LC-022D-10	70796	LC-026B-12	70399
LC-018A-10S	70147S	LC-020A-12S	70165S	LC-022B-11S	70355S	LC-022D-10S	70796S	LC-026B-12S	70399S
LC-018A-11	70148	LC-020A-13	70166	LC-022B-12	70356	LC-022D-11	70797	LC-026B-13	70400
LC-018A-11S	70148S	LC-020A-13S	70166S	LC-022B-12S	70356S	LC-022D-11S	70797S	LC-026B-13S	70400S
LC-018A-12	70149	LC-020A-14	70167	LC-022B-13	70357	LC-022D-12	70798	LC-026B-14	70401
LC-018A-12S	70149S	LC-020A-14S	70167S	LC-022B-13S	70357S	LC-022D-12S	70798S	LC-026B-14S	70401S
LC-018A-13	70152	LC-020A-15	70170	LC-022B-14	70358	LC-022D-13	70799	LC-026B-15	70404
LC-018A-13S	70152S	LC-020A-15S	70170S	LC-022B-14S	70358S	LC-022D-13S	70799S	LC-026B-15S	70404S
LC-018A-15	70132S	LC-020A-15S	70170S	LC-022B-15	70361	LC-022D-14	70800	LC-026B-16	70405
LC-018A-2	70133	LC-020A-2	70154	LC-022B-15S	70361S	LC-022D-14S	70800S	LC-026B-16S	70405S
LC-018A-2S	70133S	LC-020A-2S	70154S	LC-022B-16	70362	LC-022D-15	70781S	LC-026B-17	70406
LC-018A-3	70134	LC-020A-3	70155	LC-022B-16S	70362S	LC-022D-16	70782	LC-026B-17S	70406S
LC-018A-3S	70134S	LC-020A-3S	70155S	LC-022B-1S	70343S	LC-022D-17S	70782S	LC-026B-1S	70386S
LC-018A-4	70135	LC-020A-4	70156	LC-022B-2	70344	LC-022D-18	70783	LC-026B-2	70387
LC-018A-4S	70135S	LC-020A-4S	70156S	LC-022B-2S	70344S	LC-022D-18S	70783S	LC-026B-2S	70387S
LC-018A-5	70136	LC-020A-5	70157	LC-022B-3	70345	LC-022D-19	70784	LC-026B-3	70388
LC-018A-5S	70136S	LC-020A-5S	70157S	LC-022B-3S	70345S	LC-022D-19S	70784S	LC-026B-3S	70388S
LC-018A-6	70137	LC-020A-6	70158	LC-022B-4	70346	LC-022D-20	70785	LC-026B-4	70389
LC-018A-6S	70137S	LC-020A-6S	70158S	LC-022B-4S	70346S	LC-022D-20S	70785S	LC-026B-4S	70389S
LC-018A-7	70138	LC-020A-7	70159	LC-022B-5	70347	LC-022D-21	70786	LC-026B-5	70390
LC-018A-7S	70138S	LC-020A-7S	70159S	LC-022B-5S	70347S	LC-022D-21S	70786S	LC-026B-5S	70390S
LC-018A-8	70139	LC-020A-8	70160	LC-022B-6	70348	LC-022D-22	70787	LC-026B-6	70391
LC-018A-8S	70139S	LC-020A-8S	70160S	LC-022B-6S	70348S	LC-022D-22S	70787S	LC-026B-6S	70391S
LC-018A-9	70140	LC-020A-9	70161	LC-022B-7	70349	LC-022D-23	70789	LC-026B-7	70392
LC-018A-9S	70140S	LC-020A-9S	70161S	LC-022B-7S	70349S	LC-022D-23S	70789S	LC-026B-7S	70392S
LC-018B-1	70301	LC-020B-1	70322	LC-022B-8	70350	LC-022D-24	70793	LC-026B-8	70393
LC-018B-10	70312	LC-020B-10	70333	LC-022B-8S	70350S	LC-022D-24S	70793S	LC-026B-8S	70393S
LC-018B-10S	70312S	LC-020B-10S	70333S	LC-022B-9	70351	LC-024B-1	70363	LC-026B-9	70394
LC-018B-11	70315	LC-020B-11	70336	LC-022B-9S	70351S	LC-024B-10	70378	LC-026B-9S	70394S
LC-018B-11S	70315S	LC-020B-11S	70336S	LC-022B-0	70477	LC-024B-10S	70378S	LC-026B-0	70499
LC-018B-12	70318	LC-020B-12	70339	LC-022B-00	70476	LC-024B-11	70379	LC-026B-00	70498
LC-018B-12S	70318S	LC-020B-12S	70339S	LC-022B-00S	70476S	LC-024B-11S	70379S	LC-026B-00S	70498S
LC-018B-13	70319	LC-020B-13	70340	LC-022B-0S	70477S	LC-024B-12	70380	LC-026B-0S	70499S
LC-018B-13S	70319S	LC-020B-13S	70340S	LC-022B-1	70478	LC-024B-12S	70380S	LC-026B-1	70500
LC-018B-14	70320	LC-020B-14	70341	LC-022B-10	70492	LC-024B-13	70383	LC-026B-10	70514
LC-018B-14S	70320S	LC-020B-14S	70341S	LC-022B-10S	70492S	LC-024B-13S	70383S	LC-026B-10S	70514S
LC-018B-15	70321	LC-020B-15	70342	LC-022B-11	70495	LC-024B-14	70384	LC-026B-11	70515
LC-018B-15S	70321S	LC-020B-15S	70342S	LC-022B-11S	70495S	LC-024B-14S	70384S	LC-026B-11S	70517S
LC-018B-16	70301S	LC-020B-16	70322S	LC-022B-15	70478S	LC-024B-15	70385	LC-026B-15	70500S
LC-018B-2	70302	LC-020B-2	70323	LC-022B-2	70479	LC-024B-15S	70385S	LC-026B-2	70501
LC-018B-2S	70302S	LC-020B-2S	70323S	LC-022B-28	70479S	LC-024B-16	70363S	LC-026B-28	70501S
LC-018B-3	70303	LC-020B-3	70324	LC-022B-3	70480	LC-024B-2	70364	LC-026B-3	70502
LC-018B-3S	70303S	LC-020B-3S	70324S	LC-022B-33	70480S	LC-024B-2S	70364S	LC-026B-33	70502S
LC-018B-4	70304	LC-020B-4	70325	LC-022B-4	70481	LC-024B-3	70365	LC-026B-4	70503
LC-018B-4S	70304S	LC-020B-4S	70325S	LC-022B-4S	70481S	LC-024B-3S	70365S	LC-026B-4S	70503S
LC-018B-5	70305	LC-020B-5	70326	LC-022B-5	70482	LC-024B-4	70366	LC-026B-5	70504
LC-018B-5S	70305S	LC-020B-5S	70326S	LC-022B-55	70482S	LC-024B-4S	70366S	LC-026B-55	70504S
LC-018B-6	70306	LC-020B-6	70327	LC-022B-6	70483	LC-024B-5	70367	LC-026B-6	70505
LC-018B-6S	70306S	LC-020B-6S	70327S	LC-022B-6S	70483S	LC-024B-5S	70367S	LC-026B-6S	70505S
LC-018B-7	70307	LC-020B-7	70328	LC-022B-7	70484	LC-024B-6	70368	LC-026B-7	70506
LC-018B-7S	70307S	LC-020B-7S	70328S	LC-022B-7S	70484S	LC-024B-6S	70368S	LC-026B-7S	70506S
LC-018B-8	70308	LC-020B-8	70329	LC-022B-8	70485	LC-024B-7	70369	LC-026B-8	70507
LC-018B-8S	70308S	LC-020B-8S	70329S	LC-022B-8S	70485S	LC-024B-7S	70369S	LC-026B-8S	70507S
LC-018B-9	70309	LC-020B-9	70330	LC-022B-9	70489	LC-024B-8	70372	LC-026B-9	70511
LC-018B-9S	70309S	LC-020B-9S	70330S	LC-022B-9S	70489S	LC-024B-8S	70372S	LC-026B-9S	70511S
LC-018C-1	70536	LC-020C-1	70553	LC-022C-0	70578	LC-024B-9	70375	LC-026C-0	70620
LC-018C-10	70545	LC-020C-10	70564	LC-022C-00	70577	LC-024B-9S	70375S	LC-026C-0S	70620S
LC-018C-10S	70545S	LC-020C-10S	70564S	LC-022C-00S	70577S	LC-024C-1	70600	LC-026C-1	70621
LC-018C-11	70546	LC-020C-11	70565	LC-022C-0S	70578S	LC-024C-10	70611	LC-026C-10	70632
LC-018C-11S	70546S	LC-020C-11S	70565S	LC-022C-1	70579	LC-024C-10S	70611S	LC-026C-10S	70632S
LC-018C-12	70547	LC-020C-12	70568	LC-022C-10	70594	LC-024C-11	70614	LC-026C-11	70635
LC-018C-12S	70547S	LC-020C-12S	70568S	LC-022C-10S	70594S	LC-024C-11S	70614S	LC-026C-11S	70635S
LC-018C-13	70548	LC-020C-13	70571	LC-022C-11	70597	LC-024C-12	70617	LC-026C-12	70638
LC-018C-13S	70548S	LC-020C-13S	70571S	LC-022C-11S	70597S	LC-024C-12S	70617S	LC-026C-12S	70638S
LC-018C-14	70549	LC-020C-14	70574	LC-022C-12	70598	LC-024C-13	70618S	LC-026C-13	70639S
LC-018C-14S	70549S	LC-020C-14S	70574S	LC-022C-12S	70598S	LC-024C-14	70619	LC-026C-14	70640
LC-018C-15	70550	LC-020C-15	70575	LC-022C-13	70599	LC-024C-14S	70619S	LC-026C-14S	70640S
LC-018C-15S	70550S	LC-020C-15S	70575S	LC-022C-13S	70599S	LC-024C-15	70600S	LC-026C-15	70621S
LC-018C-16	70536S	LC-020C-16	70576	LC-022C-15	70597S	LC-024C-16	70600S	LC-026C-16	70622S
LC-018C-2	70537	LC-020C-16S	70576S	LC-022C-2	70580	LC-024C-2	70601	LC-026C-2	70622
LC-018C-2S	70537S	LC-020C-18	70553S	LC-022C-2S	70580S	LC-024C-2S	70601S	LC-026C-2S	70622S
LC-018C-3	70538	LC-020C-2	70554	LC-022C-3	70581	LC-024C-3	70602	LC-026C-3	70623
LC-018C-3S	70538S	LC-020C-2S	70554S	LC-022C-3S	70581S	LC-024C-3S	70602S	LC-026C-3S	70623S
LC-018C-4	70539	LC-020C-3	70555	LC-022C-4	70582	LC-024C-4	70603	LC-026C-4	70624
LC-018C-4S	70539S	LC-020C-3S	70555S	LC-022C-4S	70582S	LC-024C-4S	70603S	LC-026C-4S	70624S
LC-018C-5	70540	LC-020C-4	70556	LC-022C-5	70583	LC-024C-5	70604	LC-026C-5	70625
LC-018C-5S	70540S	LC-020C-4S	70556S	LC-022C-5S	70583S	LC-024C-5S	70604S	LC-026C-5S	70625S
LC-018C-6	70541	LC-020C-5	70557	LC-022C-6	70584	LC-024C-6</			

Lee Spring / Century Spring Part Numbers



Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
LC-026C-8S	70628S	LC-029B-3S	70410S	LC-030D-3S	70828S	LC-032D-13	70864	LC-035B-9S	70452S
LC-026C-9	70629	LC-029B-4	70411	LC-030D-4	70829	LC-032D-13S	70864S	LC-035C-1	70679
LC-026C-9S	70629S	LC-029B-4S	70411S	LC-030D-4S	70829S	LC-032D-14	70865	LC-035C-10	70688
LC-026D-1	70803	LC-029B-5	70412	LC-030D-5	70830	LC-032D-14S	70865S	LC-035C-10S	70688S
LC-026D-10	70812	LC-029B-5S	70412S	LC-030D-5S	70830S	LC-032D-15	70866	LC-035C-11	70689
LC-026D-10S	70812S	LC-029B-6	70413	LC-030D-6	70831	LC-032D-15S	70866S	LC-035C-11S	70689S
LC-026D-11	70815	LC-029B-6S	70413S	LC-030D-6S	70831S	LC-032D-16	70867	LC-035C-12	70690
LC-026D-11S	70815S	LC-029B-7	70414	LC-030D-7	70832	LC-032D-16S	70867S	LC-035C-12S	70690S
LC-026D-12	70818	LC-029B-7S	70414S	LC-030D-7S	70832S	LC-032D-1S	70848S	LC-035C-13	70693
LC-026D-12S	70818S	LC-029B-8	70415	LC-030D-8	70833	LC-032D-2	70849	LC-035C-13S	70693S
LC-026D-13	70819	LC-029B-8S	70415S	LC-030D-8S	70833S	LC-032D-2S	70849S	LC-035C-14	70694
LC-026D-13S	70819S	LC-029B-9	70416	LC-030D-9	70834	LC-032D-3	70850	LC-035C-14S	70694S
LC-026D-14	70820	LC-029B-9S	70416S	LC-030D-9S	70834S	LC-032D-3S	70850S	LC-035C-15	70695
LC-026D-14S	70820S	LC-029C-1	70643	LC-032B-1	70426	LC-032D-4	70851	LC-035C-15S	70695S
LC-026D-15	70821	LC-029C-10	70653	LC-032B-10	70435	LC-032D-4S	70851S	LC-035C-16	70696
LC-026D-15S	70821S	LC-029C-10S	70653S	LC-032B-10S	70435S	LC-032D-5	70852	LC-035C-16S	70696S
LC-026D-16	70822	LC-029C-11	70655	LC-032B-11	70436	LC-032D-5S	70852S	LC-035C-17	70697
LC-026D-16S	70822S	LC-029C-11S	70655S	LC-032B-11S	70436S	LC-032D-6	70853	LC-035C-17S	70697S
LC-026D-1S	70803S	LC-029C-12	70657	LC-032B-12	70437	LC-032D-6S	70853S	LC-035C-18	70698
LC-026D-2	70804	LC-029C-12S	70657S	LC-032B-12S	70437S	LC-032D-7	70854	LC-035C-18S	70698S
LC-026D-2S	70804S	LC-029C-13	70658	LC-032B-13	70438	LC-032D-7S	70854S	LC-035C-19	70699
LC-026D-3	70805	LC-029C-13S	70658S	LC-032B-13S	70438S	LC-032D-8	70855	LC-035C-19S	70699S
LC-026D-3S	70805S	LC-029C-14	70659	LC-032B-14	70439	LC-032D-8S	70855S	LC-035C-1S	70679S
LC-026D-4	70806	LC-029C-14S	70659S	LC-032B-14S	70439S	LC-032D-9	70856	LC-035C-2	70680
LC-026D-4S	70806S	LC-029C-1S	70643S	LC-032B-15	70440	LC-032D-9S	70856S	LC-035C-2S	70680S
LC-026D-5	70807	LC-029C-2	70644	LC-032B-15S	70440S	LC-032E-0	71064	LC-035C-3	70681
LC-026D-5S	70807S	LC-029C-2S	70644S	LC-032B-16	70441	LC-032E-0S	71064S	LC-035C-3S	70681S
LC-026D-6	70808	LC-029C-3	70645	LC-032B-16S	70441S	LC-032E-1	71066	LC-035C-4	70682
LC-026D-6S	70808S	LC-029C-3S	70645S	LC-032B-17	70442	LC-032E-10	71075	LC-035C-4S	70682S
LC-026D-7	70809	LC-029C-4	70646	LC-032B-17S	70442S	LC-032E-10S	71075S	LC-035C-5	70683
LC-026D-7S	70809S	LC-029C-4S	70646S	LC-032B-18	70443	LC-032E-11	71076	LC-035C-5S	70683S
LC-026D-8	70810	LC-029C-5	70647	LC-032B-18S	70443S	LC-032E-11S	71076S	LC-035C-6	70684
LC-026D-8S	70810S	LC-029C-5S	70647S	LC-032B-1S	70426S	LC-032E-12	71077	LC-035C-6S	70684S
LC-026D-9	70811	LC-029C-6	70648	LC-032B-2	70427	LC-032E-12S	71077S	LC-035C-7	70685
LC-026D-9S	70811S	LC-029C-6S	70648S	LC-032B-2S	70427S	LC-032E-13	71078	LC-035C-7S	70685S
LC-026E-1	71028	LC-029C-7	70649	LC-032B-3	70428	LC-032E-13S	71078S	LC-035C-8	70686
LC-026E-10	71037	LC-029C-7S	70649S	LC-032B-3S	70428S	LC-032E-14	71079	LC-035C-8S	70686S
LC-026E-10S	71037S	LC-029C-8	70650	LC-032B-4	70429	LC-032E-14S	71079S	LC-035C-9	70687
LC-026E-11	71038	LC-029C-8S	70650S	LC-032B-4S	70429S	LC-032E-15	71080	LC-035C-9S	70687S
LC-026E-11S	71038S	LC-029C-9	70651	LC-032B-5	70430	LC-032E-15S	71080S	LC-035D-1	70688
LC-026E-12	71041	LC-029C-9S	70651S	LC-032B-5S	70430S	LC-032E-16	71081	LC-035D-10	70687
LC-026E-12S	71041S	LC-029E-1	71047	LC-032B-6	70431	LC-032E-16S	71081S	LC-035D-10S	70687S
LC-026E-13	71042	LC-029E-10	71056	LC-032B-6S	70431S	LC-032E-17	71082	LC-035D-11	70688
LC-026E-13S	71042S	LC-029E-10S	71056S	LC-032B-7	70432	LC-032E-17S	71082S	LC-035D-11S	70688S
LC-026E-14	71043	LC-029E-11	71057	LC-032B-7S	70432S	LC-032E-18	71066S	LC-035D-12	70689
LC-026E-14S	71043S	LC-029E-11S	71057S	LC-032B-8	70433	LC-032E-2	71067	LC-035D-12S	70689S
LC-026E-15	71044	LC-029E-12	71058	LC-032B-8S	70433S	LC-032E-2S	71067S	LC-035D-13	70688
LC-026E-15S	71044S	LC-029E-12S	71058S	LC-032B-9	70434	LC-032E-3	71068	LC-035D-13S	70688S
LC-026E-1S	71028S	LC-029E-13	71059	LC-032B-9S	70434S	LC-032E-3S	71068S	LC-035D-14	70688I
LC-026E-2	71029	LC-029E-13S	71059S	LC-032C-1	70660	LC-032E-4	71069	LC-035D-14S	70688I
LC-026E-2S	71029S	LC-029E-14	71060	LC-032C-10	70669	LC-032E-4S	71069S	LC-035D-15	70688Z
LC-026E-3	71030	LC-029E-14S	71060S	LC-032C-10S	70669S	LC-032E-5	71070	LC-035D-15S	70688ZS
LC-026E-3S	71030S	LC-029E-15	71061	LC-032C-11	70670	LC-032E-5S	71070S	LC-035D-16	70688ZS
LC-026E-4	71031	LC-029E-15S	71061S	LC-032C-11S	70670S	LC-032E-6	71071	LC-035D-16S	70688ZS
LC-026E-4S	71031S	LC-029E-15S	71061S	LC-032C-12	70671	LC-032E-6S	71071S	LC-035D-17	70688A
LC-026E-5	71032	LC-029E-2	71048	LC-032C-12S	70671S	LC-032E-7	71072	LC-035D-17S	70688A
LC-026E-5S	71032S	LC-029E-2S	71048S	LC-032C-13	70674	LC-032E-7S	71072S	LC-035D-18	70688S
LC-026E-6	71033	LC-029E-3	71049	LC-032C-13S	70674S	LC-032E-8	71073	LC-035D-18S	70688S
LC-026E-6S	71033S	LC-029E-3S	71049S	LC-032C-14	70675	LC-032E-8S	71073S	LC-035D-19	70688E
LC-026E-7	71034	LC-029E-4	71050	LC-032C-14S	70675S	LC-032E-9	71074	LC-035D-19S	70688E
LC-026E-7S	71034S	LC-029E-4S	71050S	LC-032C-15	70676	LC-032E-9S	71074S	LC-035D-19S	70688E
LC-026E-8	71035	LC-029E-5	71051	LC-032C-15S	70676S	LC-035B-1	70444	LC-035D-2	70689
LC-026E-8S	71035S	LC-029E-5S	71051S	LC-032C-16	70677	LC-035B-10	70453	LC-035D-2S	70689S
LC-026E-9	71036	LC-029E-6	71052	LC-032C-16S	70677S	LC-035B-10S	70453S	LC-035D-3	70687O
LC-026E-9S	71036S	LC-029E-6S	71052S	LC-032C-17	70678	LC-035B-11	70454	LC-035D-3S	70687OS
LC-029B-0	70407	LC-029E-7	71053	LC-032C-17S	70678S	LC-035B-11S	70454S	LC-035D-4	70687I
LC-029B-0S	70407S	LC-029E-7S	71053S	LC-032C-1S	70660S	LC-035B-12	70455	LC-035D-4S	70687IS
LC-029B-1	70408	LC-029E-8	71054	LC-032C-2	70661	LC-035B-12S	70455S	LC-035D-5	70687Z
LC-029B-10	70417	LC-029E-8S	71054S	LC-032C-2S	70661S	LC-035B-13	70456	LC-035D-5S	70687ZS
LC-029B-10S	70417S	LC-029E-9	71055	LC-032C-3	70662	LC-035B-13S	70456S	LC-035D-6	70687S
LC-029B-11	70418	LC-029E-9S	71055S	LC-032C-3S	70662S	LC-035B-14	70457	LC-035D-6S	70687S
LC-029B-11S	70418S	LC-030D-1	70826	LC-032C-4	70663	LC-035B-15S	70457S	LC-035D-6S	70687S
LC-029B-12	70419	LC-030D-10	70835	LC-032C-4S	70663S	LC-035B-16	70458	LC-035D-7S	70687S
LC-029B-12S	70419S	LC-030D-10S	70835S	LC-032C-5	70664	LC-035B-16S	70458S	LC-035D-8	70687S
LC-029B-13	70420	LC-030D-11	70838	LC-032C-5S	70664S	LC-035B-17	70459	LC-035D-8S	70687S
LC-029B-13S	70420S	LC-030D-11S	70838S	LC-032C-6	70665	LC-035B-17S	70459S	LC-035D-9	70687S
LC-029B-14	70421	LC-030D-12	70841	LC-032C-6S	70665S	LC-035B-18	70457	LC-035D-9S	70687S
LC-029B-14S	70421S	LC-030D-12S	70841S	LC-032C-7	70666	LC-035B-19	70457S	LC-035D-9S	70687S
LC-029B-15	70422	LC-030D-13	70842	LC-032C-7S	70666S	LC-035B-20	70445S	LC-035E-10	71092
LC-029B-15S	70422S	LC-030D-13S	70842S	LC-032C-8	70667	LC-035B-3	70446	LC-035E-10S	71092S
LC-029B-16	70423	LC-030D-14	70843	LC-032C-8S	70667S	LC-035B-3S	70446S	LC-035E-11	71093
LC-029B-16S	70423S	LC-030D-14S	70843S	LC-032C-9	70668	LC-035B-4	70447	LC-035E-11S	71093S
LC-029B-17	70424	LC-030D-15	70844	LC-032C-9S	70668S	LC-035B-4S	70447S	LC-035E-12	71094
LC-029B-17S	70424S	LC-030D-15S	70844S	LC-032D-1	70848	LC-035B-5	70448	LC-035E-12S	71094S
LC-029B-18	70425	LC-030D-16	70845	LC-032D-10	70857	LC-035B-5S	70448S	LC-035E-13	71095
LC-029B-18S	70425S	LC-030D-16S	70845S	LC-032D-10S	70857S				

Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
LC-035E-16	71098	LC-038D-15	70901	LC-038G-12	71487	LC-040D-15	70920	LC-042D-8S	71497S
LC-035E-16S	71098S	LC-038D-15S	70901S	LC-038G-12S	71487S	LC-040D-15S	70920S	LC-042C-1	70742
LC-035E-17	71099	LC-038D-16	70902	LC-038G-13	71488	LC-040D-16	70921	LC-042C-10	70751
LC-035E-17S	71099S	LC-038D-16S	70902S	LC-038G-13S	71488S	LC-040D-16S	70921S	LC-042C-10S	70751S
LC-035E-18	71100	LC-038D-17	70903	LC-038G-14	71489	LC-040D-17	70922	LC-042C-11	70752
LC-035E-18S	71100S	LC-038D-17S	70903S	LC-038G-14S	71489S	LC-040D-17S	70922S	LC-042C-11S	70752S
LC-035E-1S	71083S	LC-038D-18	70904	LC-038G-15	71476S	LC-040D-18	70923	LC-042C-12	70753
LC-035E-2	71084	LC-038D-18S	70904S	LC-038G-2	71477	LC-040D-18S	70923S	LC-042C-12S	70753S
LC-035E-2S	71084S	LC-038D-19	70905	LC-038G-2S	71477S	LC-040D-19	70924	LC-042C-13	70754
LC-035E-3	71085	LC-038D-19S	70905S	LC-038G-3	71478	LC-040D-19S	70924S	LC-042C-13S	70754S
LC-035E-3S	71085S	LC-038D-1S	70887S	LC-038G-3S	71478S	LC-040D-1S	70906S	LC-042C-14	70755
LC-035E-4	71086	LC-038D-2	70888	LC-038G-4	71479	LC-040D-2	70907	LC-042C-14S	70755S
LC-035E-4S	71086S	LC-038D-2S	70888S	LC-038G-4S	71479S	LC-040D-2S	70907S	LC-042C-15	70756
LC-035E-5	71087	LC-038D-3	70889	LC-038G-5	71480	LC-040D-3	70908	LC-042C-15S	70756S
LC-035E-5S	71087S	LC-038D-3S	70889S	LC-038G-5S	71480S	LC-040D-3S	70908S	LC-042C-16	70757
LC-035E-6	71088	LC-038D-4	70890	LC-038G-6	71481	LC-040D-4	70909	LC-042C-16S	70757S
LC-035E-6S	71088S	LC-038D-4S	70890S	LC-038G-6S	71481S	LC-040D-4S	70909S	LC-042C-17	70758
LC-035E-7	71089	LC-038D-5	70891	LC-038G-7	71482	LC-040D-5	70910	LC-042C-17S	70758S
LC-035E-7S	71089S	LC-038D-5S	70891S	LC-038G-7S	71482S	LC-040D-5S	70910S	LC-042C-18	70759
LC-035E-8	71090	LC-038D-6	70892	LC-038G-8	71483	LC-040D-6	70911	LC-042C-18S	70759S
LC-035E-8S	71090S	LC-038D-6S	70892S	LC-038G-8S	71483S	LC-040D-6S	70911S	LC-042C-19	70760
LC-035E-9	71091	LC-038D-7	70893	LC-038G-9	71484	LC-040D-7	70912	LC-042C-19S	70760S
LC-035E-9S	71091S	LC-038D-7S	70893S	LC-038G-9S	71484S	LC-040D-7S	70912S	LC-042C-1S	70742S
LC-035F-1	71313	LC-038D-8	70894	LC-039FG-1	71445	LC-040D-8	70913	LC-042C-2	70743
LC-035F-1S	71313S	LC-038D-8S	70894S	LC-039FG-1S	71445S	LC-040D-8S	70913S	LC-042C-2S	70743S
LC-035F-2	71314	LC-038D-9	70895	LC-039FG-2	71446	LC-040D-9	70914	LC-042C-3	70744
LC-035F-2S	71314S	LC-038D-9S	70895S	LC-039FG-2S	71446S	LC-040D-9S	70914S	LC-042C-3S	70744S
LC-035F-3	71315	LC-038E-1	71101	LC-039FG-3	71447	LC-040E-1	71119	LC-042C-4	70745
LC-035F-3S	71315S	LC-038E-10	71110	LC-039FG-3S	71447S	LC-040E-10	71128	LC-042C-4S	70745S
LC-035F-4	71316	LC-038E-10S	71110S	LC-039FG-4	71448	LC-040E-10S	71128S	LC-042C-5	70746
LC-035F-4S	71316S	LC-038E-11	71111	LC-039FG-4S	71448S	LC-040E-11	71129	LC-042C-5S	70746S
LC-035F-5	71317	LC-038E-11S	71111S	LC-039FG-5	71449	LC-040E-11S	71129S	LC-042C-6	70747
LC-035F-5S	71317S	LC-038E-12	71112	LC-039FG-5S	71449S	LC-040E-12	71130	LC-042C-6S	70747S
LC-035F-6	71318	LC-038E-12S	71112S	LC-039FG-6	71450	LC-040E-12S	71130S	LC-042C-7	70748
LC-035F-6S	71318S	LC-038E-13	71113	LC-039FG-6S	71450S	LC-040E-13	71131	LC-042C-7S	70748S
LC-035F-7	71319	LC-038E-13S	71113S	LC-039FG-7	71451	LC-040E-13S	71131S	LC-042C-8	70749
LC-035F-7S	71319S	LC-038E-14	71114	LC-039FG-7S	71451S	LC-040E-14	71132	LC-042C-8S	70749S
LC-035F-8	71320	LC-038E-14S	71114S	LC-039FG-8	71452	LC-040E-14S	71132S	LC-042C-9	70750
LC-035F-8S	71320S	LC-038E-15	71115	LC-039FG-8S	71452S	LC-040E-15	71133	LC-042C-9S	70750S
LC-038C-1	70700	LC-038E-15S	71115S	LC-040C-1	70720	LC-040E-15S	71133S	LC-042D-1	70925
LC-038C-10	70709	LC-038E-16	71116	LC-040C-10	70729	LC-040E-16	71134	LC-042D-10	70934
LC-038C-10S	70709S	LC-038E-16S	71116S	LC-040C-10S	70729S	LC-040E-16S	71134S	LC-042D-10S	70934S
LC-038C-11	70710	LC-038E-17	71117	LC-040C-11	70730	LC-040E-17	71135	LC-042D-11	70935
LC-038C-11S	70710S	LC-038E-17S	71117S	LC-040C-11S	70730S	LC-040E-17S	71135S	LC-042D-11S	70935S
LC-038C-12	70711	LC-038E-18	71118	LC-040C-12	70731	LC-040E-18S	71136S	LC-042D-12S	70936S
LC-038C-12S	70711S	LC-038E-18S	71118S	LC-040C-12S	70731S	LC-040E-18S	71136S	LC-042D-13	70937
LC-038C-13	70712	LC-038E-1S	71101S	LC-040C-13	70732	LC-040E-1S	71119S	LC-042D-13S	70937S
LC-038C-13S	70712S	LC-038E-2	71102	LC-040C-13S	70732S	LC-040E-2	71120	LC-042D-13S	70937S
LC-038C-14	70713	LC-038E-2S	71102S	LC-040C-14	70733	LC-040E-2S	71120S	LC-042D-14	70938
LC-038C-14S	70713S	LC-038E-3	71103	LC-040C-14S	70733S	LC-040E-3	71121	LC-042D-14S	70938S
LC-038C-15	70714	LC-038E-3S	71103S	LC-040C-15	70734	LC-040E-3S	71121S	LC-042D-15	70939
LC-038C-15S	70714S	LC-038E-4	71104	LC-040C-15S	70734S	LC-040E-4	71122	LC-042D-15S	70939S
LC-038C-16	70715	LC-038E-4S	71104S	LC-040C-16	70735	LC-040E-4S	71122S	LC-042D-16	70940
LC-038C-16S	70715S	LC-038E-5	71105	LC-040C-16S	70735S	LC-040E-5	71123	LC-042D-16S	70940S
LC-038C-17	70716	LC-038E-5S	71105S	LC-040C-17	70740	LC-040E-5S	71123S	LC-042D-17	70941
LC-038C-17S	70716S	LC-038E-6	71106	LC-040C-17S	70740S	LC-040E-6	71124	LC-042D-17S	70941S
LC-038C-18	70717	LC-038E-6S	71106S	LC-040C-18	70737	LC-040E-6S	71124S	LC-042D-18	70942
LC-038C-18S	70717S	LC-038E-7	71107	LC-040C-18S	70737S	LC-040E-7	71125	LC-042D-18S	70942S
LC-038C-19	70718	LC-038E-7S	71107S	LC-040C-19	70741	LC-040E-7S	71125S	LC-042D-19	70943
LC-038C-19S	70718S	LC-038E-8	71108	LC-040C-19S	70741S	LC-040E-8	71126	LC-042D-19S	70943S
LC-038C-1S	70700S	LC-038E-8S	71108S	LC-040C-1S	70720S	LC-040E-8S	71126S	LC-042D-1S	70925S
LC-038C-2	70701	LC-038E-9	71109	LC-040C-2	70721	LC-040E-9	71127	LC-042D-2	70926
LC-038C-20	70719	LC-038E-9S	71109S	LC-040C-20	70739	LC-040E-9S	71127S	LC-042D-2S	70926S
LC-038C-20S	70719S	LC-038F-1	71327	LC-040C-20S	70739S	LC-041GH-1	71633	LC-042D-3	70927
LC-038C-2S	70701S	LC-038F-10	71337	LC-040C-2S	70721S	LC-041GH-10	71642	LC-042D-3S	70927S
LC-038C-3	70702	LC-038F-10S	71337S	LC-040C-3	70722	LC-041GH-10S	71642S	LC-042D-4	70928
LC-038C-3S	70702S	LC-038F-11	71338	LC-040C-3S	70722S	LC-041GH-11	71643	LC-042D-4S	70928S
LC-038C-4	70703	LC-038F-11S	71338S	LC-040C-4	70723	LC-041GH-11S	71643S	LC-042D-5	70929
LC-038C-4S	70703S	LC-038F-1S	71327S	LC-040C-4S	70723S	LC-041GH-12	71644	LC-042D-5S	70929S
LC-038C-5	70704	LC-038F-2	71329	LC-040C-5	70724	LC-041GH-12S	71644S	LC-042D-6	70930
LC-038C-5S	70704S	LC-038F-2S	71329S	LC-040C-5S	70724S	LC-041GH-13	71645	LC-042D-6S	70930S
LC-038C-6	70705	LC-038F-3	71330	LC-040C-6	70725	LC-041GH-13S	71645S	LC-042D-7	70931
LC-038C-6S	70705S	LC-038F-3S	71330S	LC-040C-6S	70725S	LC-041GH-15	71633S	LC-042D-7S	70931S
LC-038C-7	70706	LC-038F-4	71331	LC-040C-7	70726	LC-041GH-12	71634	LC-042D-8	70932
LC-038C-7S	70706S	LC-038F-4S	71331S	LC-040C-7S	70726S	LC-041GH-2S	71634S	LC-042D-8S	70932S
LC-038C-8	70707	LC-038F-5	71332	LC-040C-8	70727	LC-041GH-3	71635	LC-042D-9	70933
LC-038C-8S	70707S	LC-038F-5S	71332S	LC-040C-8S	70727S	LC-041GH-3S	71635S	LC-042D-9S	70933S
LC-038C-9	70708	LC-038F-6	71333	LC-040C-9	70728	LC-041GH-4	71636	LC-042E-1	71137
LC-038C-9S	70708S	LC-038F-6S	71333S	LC-040C-9S	70728S	LC-041GH-4S	71636S	LC-042E-10	71146
LC-038D-1	70887	LC-038F-7	71334	LC-040D-1	70906	LC-041GH-5	71637	LC-042E-10S	71146S
LC-038D-10	70896	LC-038F-7S	71334S	LC-040D-10	70915	LC-041GH-5S	71637S	LC-042E-11	71147
LC-038D-10S	70896S	LC-038F-8	71335	LC-040D-10S	70915S	LC-041GH-6	71638	LC-042E-11S	71147S
LC-038D-11	70897	LC-038F-8S	71335S	LC-040D-11	70916	LC-041GH-6S	71638S	LC-042E-12	71148
LC-038D-11S	70897S	LC-038F-9	71336	LC-040D-11S	70916S	LC-041GH-7	71639	LC-042E-12S	71148S
LC-038D-12	70898	LC-038F-9S	71336S	LC-040D-12	70917	LC-041GH-7S	71639S	LC-042E-13	71149
LC-038D-12S	70898S	LC-038G-1	71476	LC-040D-12S	70917S	LC-041GH			

Lee Spring / Century Spring Part Numbers



Lee Spring/Century Spring Part Numbers

Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
LC-042E-16	71152	LC-043EF-5S	71287S	LC-045E-13	71167	LC-045H-13	71726	LC-047D-4S	70966S
LC-042E-16S	71152S	LC-043EF-6	71288	LC-045E-13S	71167S	LC-045H-13S	71726S	LC-047D-5	70967
LC-042E-17	71153	LC-043EF-6S	71288S	LC-045E-14	71168	LC-045H-14	71728	LC-047D-5S	70967S
LC-042E-17S	71153S	LC-043EF-7	71289	LC-045E-14S	71168S	LC-045H-14S	71728S	LC-047D-6	70968
LC-042E-18	71154	LC-043EF-7S	71289S	LC-045E-15	71169	LC-045H-15	71728S	LC-047D-6S	70968S
LC-042E-18S	71154S	LC-043EF-8	71290	LC-045E-15S	71169S	LC-045H-2	71713	LC-047D-7	70969
LC-042E-1S	71137S	LC-043EF-8S	71290S	LC-045E-16	71170	LC-045H-2S	71713S	LC-047D-7S	70969S
LC-042E-2	71138	LC-043EF-9	71291	LC-045E-16S	71170S	LC-045H-3	71714	LC-047D-8	70970
LC-042E-2S	71138S	LC-043EF-9S	71291S	LC-045E-17	71171	LC-045H-3S	71714S	LC-047D-8S	70970S
LC-042E-3	71139	LC-045C-1	70761	LC-045E-17S	71171S	LC-045H-4	71715	LC-047D-9	70971
LC-042E-3S	71139S	LC-045C-10	70770	LC-045E-18	71172	LC-045H-4S	71715S	LC-047D-9S	70971S
LC-042E-4	71140	LC-045C-10S	70770S	LC-045E-18S	71172S	LC-045H-5	71716	LC-047EF-1	71298
LC-042E-4S	71140S	LC-045C-11	70771	LC-045E-19	71173	LC-045H-5S	71716S	LC-047EF-10	71307
LC-042E-5	71141	LC-045C-11S	70771S	LC-045E-19S	71173S	LC-045H-6	71718	LC-047EF-10S	71307S
LC-042E-5S	71141S	LC-045C-12	70772	LC-045E-1S	71155S	LC-045H-6S	71718S	LC-047EF-11	71308
LC-042E-6	71142	LC-045C-12S	70772S	LC-045E-2	71156	LC-045H-7	71720	LC-047EF-11S	71308S
LC-042E-6S	71142S	LC-045C-13	70773	LC-045E-2S	71156S	LC-045H-7S	71720S	LC-047EF-12	71309
LC-042E-7	71143	LC-045C-13S	70773S	LC-045E-3	71157	LC-045H-8	71721	LC-047EF-12S	71309S
LC-042E-7S	71143S	LC-045C-14	70774	LC-045E-3S	71157S	LC-045H-8S	71721S	LC-047EF-13	71310
LC-042E-8	71144	LC-045C-14S	70774S	LC-045E-4	71158	LC-045H-9	71722	LC-047EF-13S	71310S
LC-042E-8S	71144S	LC-045C-15	70775	LC-045E-4S	71158S	LC-045H-9S	71722S	LC-047EF-14	71311
LC-042E-9	71145	LC-045C-15S	70775S	LC-045E-5	71159	LC-046FG-1	71455	LC-047EF-14S	71311S
LC-042E-9S	71145S	LC-045C-16	70776	LC-045E-5S	71159S	LC-046FG-1S	71455S	LC-047EF-15	71312
LC-042F-1	71339	LC-045C-16S	70776S	LC-045E-6	71160	LC-046FG-2	71456	LC-047EF-15S	71312S
LC-042F-10	71349	LC-045C-17	70777	LC-045E-6S	71160S	LC-046FG-2S	71456S	LC-047EF-1S	71298S
LC-042F-10S	71349S	LC-045C-17S	70777S	LC-045E-7	71161	LC-046FG-3	71457	LC-047EF-2	71299
LC-042F-11	71350	LC-045C-18	70778	LC-045E-7S	71161S	LC-046FG-3S	71457S	LC-047EF-2S	71299S
LC-042F-11S	71350S	LC-045C-18S	70778S	LC-045E-8	71162	LC-046FG-4	71458	LC-047EF-3	71300
LC-042F-1S	71339S	LC-045C-1S	70761S	LC-045E-8S	71162S	LC-046FG-4S	71458S	LC-047EF-3S	71300S
LC-042F-2	71341	LC-045C-2	70762	LC-045E-9	71163	LC-046FG-5	71459	LC-047EF-4	71301
LC-042F-2S	71341S	LC-045C-2S	70762S	LC-045E-9S	71163S	LC-046FG-5S	71459S	LC-047EF-4S	71301S
LC-042F-3	71342	LC-045C-3	70763	LC-045F-1	71351	LC-046FG-6	71460	LC-047EF-5	71302
LC-042F-3S	71342S	LC-045C-3S	70763S	LC-045F-10	71360	LC-046FG-6S	71460S	LC-047EF-5S	71302S
LC-042F-4	71343	LC-045C-4	70764	LC-045F-10S	71360S	LC-046FG-7	71461	LC-047EF-6	71303
LC-042F-4S	71343S	LC-045C-4S	70764S	LC-045F-11	71361	LC-046FG-7S	71461S	LC-047EF-6S	71303S
LC-042F-5	71344	LC-045C-5	70765	LC-045F-11S	71361S	LC-046FG-8	71462	LC-047EF-7	71304
LC-042F-5S	71344S	LC-045C-5S	70765S	LC-045F-1S	71351S	LC-046FG-8S	71462S	LC-047EF-7S	71304S
LC-042F-6	71345	LC-045C-6	70766	LC-045F-2	71352	LC-046GH-1	71646	LC-047EF-8	71305
LC-042F-6S	71345S	LC-045C-6S	70766S	LC-045F-2S	71352S	LC-046GH-10	71655	LC-047EF-8S	71305S
LC-042F-7	71346	LC-045C-7	70767	LC-045F-3	71353	LC-046GH-10S	71655S	LC-047EF-9	71306
LC-042F-7S	71346S	LC-045C-7S	70767S	LC-045F-3S	71353S	LC-046GH-11	71656	LC-047EF-9S	71306S
LC-042F-8	71347	LC-045C-8	70768	LC-045F-4	71354	LC-046GH-11S	71656S	LC-047F-1	71362
LC-042F-8S	71347S	LC-045C-8S	70768S	LC-045F-4S	71354S	LC-046GH-12	71657	LC-047F-1S	71362S
LC-042F-9	71348	LC-045C-9	70769	LC-045F-5	71355	LC-046GH-12S	71657S	LC-047F-2	71363
LC-042F-9S	71348S	LC-045C-9S	70769S	LC-045F-5S	71355S	LC-046GH-13	71658	LC-047F-2S	71363S
LC-042G-1	71490	LC-045D-1	70944	LC-045F-6	71356	LC-046GH-13S	71658S	LC-047F-3	71364
LC-042G-10	71499	LC-045D-10	70953	LC-045F-6S	71356S	LC-046GH-1S	71646S	LC-047F-3S	71364S
LC-042G-10S	71499S	LC-045D-10S	70953S	LC-045F-7	71357	LC-046GH-2	71647	LC-047F-4	71365
LC-042G-11	71500	LC-045D-11	70954	LC-045F-7S	71357S	LC-046GH-2S	71647S	LC-047F-4S	71365S
LC-042G-11S	71500S	LC-045D-11S	70954S	LC-045F-8	71358	LC-046GH-3	71648	LC-047F-5	71366
LC-042G-12	71501	LC-045D-12	70955	LC-045F-8S	71358S	LC-046GH-3S	71648S	LC-047F-5S	71366S
LC-042G-12S	71501S	LC-045D-12S	70955S	LC-045F-9	71359	LC-046GH-4	71649	LC-047F-6	71367
LC-042G-13	71502	LC-045D-13	70956	LC-045F-9S	71359S	LC-046GH-4S	71649S	LC-047F-6S	71367S
LC-042G-13S	71502S	LC-045D-13S	70956S	LC-045G-1	71504	LC-046GH-5	71650	LC-047F-7	71368
LC-042G-14	71503	LC-045D-14	70957	LC-045G-10	71513	LC-046GH-5S	71650S	LC-047F-7S	71368S
LC-042G-14S	71503S	LC-045D-14S	70957S	LC-045G-10S	71513S	LC-046GH-6	71652	LC-047F-8	71369
LC-042G-15	71490S	LC-045D-15	70958	LC-045G-11	71514	LC-046GH-6S	71652S	LC-047F-8S	71369S
LC-042G-2	71491	LC-045D-15S	70958S	LC-045G-11S	71514S	LC-046GH-7	71651	LC-047F-9	71370
LC-042G-2S	71491S	LC-045D-16	70959	LC-045G-12	71515	LC-046GH-7S	71651S	LC-047F-9S	71370S
LC-042G-3	71492	LC-045D-16S	70959S	LC-045G-12S	71515S	LC-046GH-8	71653	LC-049E-1	71196
LC-042G-3S	71492S	LC-045D-17	70960	LC-045G-13	71516	LC-046GH-8S	71653S	LC-049E-10	71206
LC-042G-4	71493	LC-045D-17S	70960S	LC-045G-13S	71516S	LC-046GH-9	71654	LC-049E-10S	71206S
LC-042G-4S	71493S	LC-045D-18	70961	LC-045G-14	71517	LC-046GH-9S	71654S	LC-049E-11	71207
LC-042G-5	71494	LC-045D-18S	70961S	LC-045G-14S	71517S	LC-047D-1	70963	LC-049E-11S	71207S
LC-042G-5S	71494S	LC-045D-19	70962	LC-045G-15	71504S	LC-047D-10	70972	LC-049E-12	71208
LC-042G-6	71495	LC-045D-19S	70962S	LC-045G-2	71505	LC-047D-10S	70972S	LC-049E-12S	71208S
LC-042G-6S	71495S	LC-045D-15	70944S	LC-045G-2S	71505S	LC-047D-11	70973	LC-049E-13	71209
LC-042G-7	71496	LC-045D-2	70945	LC-045G-3	71506	LC-047D-11S	70973S	LC-049E-13S	71209S
LC-042G-7S	71496S	LC-045D-2S	70945S	LC-045G-3S	71506S	LC-047D-12	70974	LC-049E-14	71210
LC-042G-9	71498	LC-045D-3	70946	LC-045G-4	71507	LC-047D-12S	70974S	LC-049E-14S	71210S
LC-042G-9S	71498S	LC-045D-3S	70946S	LC-045G-4S	71507S	LC-047D-13	70975	LC-049E-15	71211
LC-043EF-1	71283	LC-045D-4	70947	LC-045G-5	71508	LC-047D-13S	70975S	LC-049E-15S	71211S
LC-043EF-10	71292	LC-045D-4S	70947S	LC-045G-5S	71508S	LC-047D-14	70976	LC-049E-16	71212
LC-043EF-10S	71292S	LC-045D-5	70948	LC-045G-6	71509	LC-047D-14S	70976S	LC-049E-16S	71212S
LC-043EF-11	71293	LC-045D-5S	70948S	LC-045G-6S	71509S	LC-047D-15	70977	LC-049E-17	71213
LC-043EF-11S	71293S	LC-045D-6	70949	LC-045G-7	71510	LC-047D-15S	70977S	LC-049E-17S	71213S
LC-043EF-12	71294	LC-045D-6S	70949S	LC-045G-7S	71510S	LC-047D-16	70978	LC-049E-18	71214
LC-043EF-12S	71294S	LC-045D-7	70950	LC-045G-8	71511	LC-047D-16S	70978S	LC-049E-18S	71214S
LC-043EF-13	71295	LC-045D-7S	70950S	LC-045G-8S	71511S	LC-047D-17	70979	LC-049E-19	71215
LC-043EF-13S	71295S	LC-045D-8	70951	LC-045G-9	71512	LC-047D-17S	70979S	LC-049E-19S	71215S
LC-043EF-14	71296	LC-045D-8S	70951S	LC-045G-9S	71512S	LC-047D-18	70980	LC-049E-1S	71196S
LC-043EF-14S	71296S	LC-045D-9	70952	LC-045H-0	71711	LC-047D-18S	70980S	LC-049E-2	71197
LC-043EF-15	71283	LC-045D-9S	70952S	LC-045H-0S	71711S	LC-047D-19	70981	LC-049E-2S	71197S
LC-043EF-2	71284	LC-045E-1	71155	LC-045H-1	71712	LC-047D-19S	70981S	LC-049E-3	71198
LC-043EF-2S	71284S	LC-045E-10	71164	LC-045H-10	71723	LC-047D-15	70976S	LC-049E-3S	71198S
LC-043EF-3	71285	LC-045E-10S	71164S	LC-045H-10S	71723S	LC-047D-2	70964	LC-049E-4	71199
LC-043EF-3S</									

Lee Spring / Century Spring Part Numbers

Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
LC-049E-6S	71201S	LC-051D-17	71021	LC-051G-13	71530	LC-055F-1S	71397S	LC-055HJ-8S	71884S
LC-049E-7	71202	LC-051D-17S	71021S	LC-051G-13S	71530S	LC-055F-2	71398	LC-055HJ-9	71885
LC-049E-7S	71202S	LC-051D-18	71022	LC-051G-14	71531	LC-055F-2S	71398S	LC-055HJ-9S	71885S
LC-049E-8	71203	LC-051D-18S	71022S	LC-051G-14S	71531S	LC-055F-3	71399	LC-055J-0	71926
LC-049E-8S	71203S	LC-051D-19	71023	LC-051G-15	71518S	LC-055F-3S	71399S	LC-055J-0S	71926S
LC-049E-9	71205	LC-051D-19S	71023S	LC-051G-2	71519	LC-055F-4	71400	LC-055J-1	71927
LC-049E-9S	71205S	LC-051D-1S	71005S	LC-051G-2S	71519S	LC-055F-4S	71400S	LC-055J-10	71936
LC-049H-1	71729	LC-051D-2	71006	LC-051G-3	71520	LC-055F-5	71401	LC-055J-10S	71936S
LC-049H-10	71738	LC-051D-2S	71006S	LC-051G-3S	71520S	LC-055F-5S	71401S	LC-055J-11	71937
LC-049H-10S	71738S	LC-051D-3	71007	LC-051G-4	71521	LC-055F-6	71402	LC-055J-11S	71937S
LC-049H-11	71739	LC-051D-3S	71007S	LC-051G-4S	71521S	LC-055F-6S	71402S	LC-055J-1S	71927S
LC-049H-11S	71739S	LC-051D-4	71008	LC-051G-5	71522	LC-055F-7	71403	LC-055J-2	71928
LC-049H-12	71740	LC-051D-4S	71008S	LC-051G-5S	71522S	LC-055F-7S	71403S	LC-055J-2S	71928S
LC-049H-12S	71740S	LC-051D-5	71009	LC-051G-6	71523	LC-055F-8	71404	LC-055J-3	71929
LC-049H-1S	71729S	LC-051D-5S	71009S	LC-051G-6S	71523S	LC-055F-8S	71404S	LC-055J-3S	71929S
LC-049H-2	71730	LC-051D-6	71010	LC-051G-7	71524	LC-055F-9	71405	LC-055J-4	71930
LC-049H-2S	71730S	LC-051D-6S	71010S	LC-051G-7S	71524S	LC-055F-9S	71405S	LC-055J-4S	71930S
LC-049H-3	71731	LC-051D-7	71011	LC-051G-8	71525	LC-055F-1	71532	LC-055J-5	71931
LC-049H-3S	71731S	LC-051D-7S	71011S	LC-051G-8S	71525S	LC-055F-10	71541	LC-055J-5S	71931S
LC-049H-4	71732	LC-051D-8	71012	LC-051G-9	71526	LC-055F-10S	71541S	LC-055J-6	71932
LC-049H-4S	71732S	LC-051D-8S	71012S	LC-051G-9S	71526S	LC-055F-11	71542	LC-055J-6S	71932S
LC-049H-5	71733	LC-051D-9	71013	LC-054GH-1	71659	LC-055F-11S	71542S	LC-055J-7	71933
LC-049H-5S	71733S	LC-051D-9S	71013S	LC-054GH-10	71668	LC-055F-12	71543	LC-055J-7S	71933S
LC-049H-6	71734	LC-051E-1	71218	LC-054GH-10S	71668S	LC-055F-12S	71543S	LC-055J-8	71934
LC-049H-6S	71734S	LC-051E-10	71228	LC-054GH-11	71669	LC-055F-13	71544	LC-055J-8S	71934S
LC-049H-7	71735	LC-051E-10S	71228S	LC-054GH-11S	71669S	LC-055F-13S	71544S	LC-055J-9	71935
LC-049H-7S	71735S	LC-051E-11	71229	LC-054GH-12	71670	LC-055F-14	71545	LC-055J-9S	71935S
LC-049H-8	71736	LC-051E-11S	71229S	LC-054GH-12S	71670S	LC-055F-14S	71545S	LC-055K-1	72146
LC-049H-8S	71736S	LC-051E-12	71230	LC-054GH-13	71671	LC-055F-15	71532S	LC-055K-10	72161
LC-049H-9	71737	LC-051E-12S	71230S	LC-054GH-13S	71671S	LC-055F-2	71533	LC-055K-10S	72161S
LC-049H-9S	71737S	LC-051E-13	71231	LC-054GH-15	71659S	LC-055F-2S	71533S	LC-055K-1S	72146S
LC-049H-1J	71865	LC-051E-13S	71231S	LC-054GH-2	71660	LC-055F-3	71534	LC-055K-2	72147
LC-049HJ-10	71874	LC-051E-14	71232	LC-054GH-2S	71660S	LC-055F-3S	71534S	LC-055K-2S	72147S
LC-049HJ-10S	71874S	LC-051E-14S	71232S	LC-054GH-3	71661	LC-055F-4	71535	LC-055K-3	72148
LC-049HJ-11	71875	LC-051E-15	71233	LC-054GH-3S	71661S	LC-055F-4S	71535S	LC-055K-3S	72148S
LC-049HJ-11S	71875S	LC-051E-15S	71233S	LC-054GH-4	71662	LC-055F-5	71536	LC-055K-4	72149
LC-049HJ-12	71876	LC-051E-16	71234	LC-054GH-4S	71662S	LC-055F-5S	71536S	LC-055K-4S	72149S
LC-049HJ-12S	71876S	LC-051E-16S	71234S	LC-054GH-5	71663	LC-055F-6	71537	LC-055K-5	72150
LC-049HJ-15	71865S	LC-051E-17	71235	LC-054GH-5S	71663S	LC-055F-6S	71537S	LC-055K-5S	72150S
LC-049HJ-2	71866	LC-051E-17S	71235S	LC-054GH-6	71664	LC-055F-7	71538	LC-055K-6	72153
LC-049HJ-2S	71866S	LC-051E-18	71236	LC-054GH-6S	71664S	LC-055F-7S	71538S	LC-055K-6S	72153S
LC-049HJ-3	71867	LC-051E-18S	71236S	LC-054GH-7	71665	LC-055F-8	71539	LC-055K-7	72156
LC-049HJ-3S	71867S	LC-051E-19	71237	LC-054GH-7S	71665S	LC-055F-8S	71539S	LC-055K-7S	72156S
LC-049HJ-4	71868	LC-051E-19S	71237S	LC-054GH-8	71666	LC-055F-9	71540	LC-055K-8	72159
LC-049HJ-4S	71868S	LC-051E-19S	71238S	LC-054GH-8S	71666S	LC-055F-9S	71540S	LC-055K-8S	72159S
LC-049HJ-5	71869	LC-051E-2	71219	LC-054GH-9	71667	LC-055H-1	71741	LC-055K-9	72160
LC-049HJ-5S	71869S	LC-051E-2S	71219S	LC-054GH-9S	71667S	LC-055H-10	71750	LC-055K-9S	72160S
LC-049HJ-6	71870	LC-051E-3	71220	LC-055E-1	71240	LC-055H-10S	71750S	LC-058GH-1	71672
LC-049HJ-6S	71870S	LC-051E-3S	71220S	LC-055E-10	71250	LC-055H-11	71751	LC-058GH-10	71681
LC-049HJ-7	71871	LC-051E-4	71221	LC-055E-10S	71250S	LC-055H-11S	71751S	LC-058GH-10S	71681S
LC-049HJ-7S	71871S	LC-051E-4S	71221S	LC-055E-11	71251	LC-055H-12	71752	LC-058GH-11	71682
LC-049HJ-8	71872	LC-051E-5	71222	LC-055E-11S	71251S	LC-055H-12S	71752S	LC-058GH-11S	71682S
LC-049HJ-8S	71872S	LC-051E-5S	71222S	LC-055E-12	71252	LC-055H-13	71741S	LC-058GH-12	71683
LC-049HJ-9	71873	LC-051E-6	71223	LC-055E-12S	71252S	LC-055H-2	71742	LC-058GH-12S	71683S
LC-049HJ-9S	71873S	LC-051E-6S	71223S	LC-055E-13	71253	LC-055H-2S	71742S	LC-058GH-13	71684
LC-050K-1	72136	LC-051E-7	71224	LC-055E-13S	71253S	LC-055H-3	71743	LC-058GH-13S	71684S
LC-050K-10	72145	LC-051E-7S	71224S	LC-055E-14	71254	LC-055H-3S	71743S	LC-058GH-15	71672S
LC-050K-10S	72145S	LC-051E-8	71225	LC-055E-14S	71254S	LC-055H-4	71744	LC-058GH-2	71673
LC-050K-1S	72136S	LC-051E-8S	71225S	LC-055E-15	71255	LC-055H-4S	71744S	LC-058GH-2S	71673S
LC-050K-2	72137	LC-051E-9	71227	LC-055E-15S	71255S	LC-055H-5	71745	LC-058GH-3	71674
LC-050K-2S	72137S	LC-051E-9S	71227S	LC-055E-16	71256	LC-055H-5S	71745S	LC-058GH-3S	71674S
LC-050K-3	72138	LC-051F-1	71386	LC-055E-16S	71256S	LC-055H-6	71746	LC-058GH-4	71675
LC-050K-3S	72138S	LC-051F-10	71395	LC-055E-17	71257	LC-055H-6S	71746S	LC-058GH-4S	71675S
LC-050K-4	72139	LC-051F-10S	71395S	LC-055E-17S	71257S	LC-055H-7	71747	LC-058GH-5	71676
LC-050K-4S	72139S	LC-051F-11	71396	LC-055E-18	71258	LC-055H-7S	71747S	LC-058GH-5S	71676S
LC-050K-5	72140	LC-051F-11S	71396S	LC-055E-18S	71258S	LC-055H-8	71748	LC-058GH-6	71677
LC-050K-5S	72140S	LC-051F-1S	71386S	LC-055E-19	71259	LC-055H-8S	71748S	LC-058GH-6S	71677S
LC-050K-6	72141	LC-051F-2	71387	LC-055E-19S	71259S	LC-055H-9	71749	LC-058GH-7	71678
LC-050K-6S	72141S	LC-051F-2S	71388	LC-055E-1S	71240S	LC-055H-9S	71749S	LC-058GH-7S	71678S
LC-050K-7	72142	LC-051F-3	71388	LC-055E-2	71241	LC-055H-10	71787	LC-058GH-8	71679
LC-050K-7S	72142S	LC-051F-3S	71388S	LC-055E-2S	71241S	LC-055H-10S	71787S	LC-058GH-8S	71679S
LC-050K-8	72143	LC-051F-4	71389	LC-055E-3	71242	LC-055H-10S	71788S	LC-058GH-9	71680
LC-050K-8S	72143S	LC-051F-4S	71389S	LC-055E-3S	71242S	LC-055H-11	71788T	LC-058GH-9S	71680S
LC-050K-9	72144	LC-051F-5	71390	LC-055E-4	71243	LC-055H-11S	71788T	LC-059E-1	71626
LC-050K-9S	72144S	LC-051F-5S	71390S	LC-055E-4S	71243S	LC-055H-12	71788	LC-059E-10	71271
LC-051D-1	71005	LC-051F-6	71391	LC-055E-5	71244	LC-055H-12S	71788S	LC-059E-10S	71271S
LC-051D-10	71014	LC-051F-6S	71391S	LC-055E-5S	71244S	LC-055H-13	71787S	LC-059E-11	71272
LC-051D-10S	71014S	LC-051F-7	71392	LC-055E-6	71245	LC-055H-2	71787	LC-059E-11S	71272S
LC-051D-11	71015	LC-051F-7S	71392S	LC-055E-6S	71245S	LC-055H-2S	71787S	LC-059E-12	71273
LC-051D-11S	71015S	LC-051F-8	71393	LC-055E-7	71246	LC-055H-3	71787	LC-059E-12S	71273S
LC-051D-12	71016	LC-051F-8S	71393S	LC-055E-7S	71246S	LC-055H-3S	71787S	LC-059E-13	71274
LC-051D-12S	71016S	LC-051F-9	71394	LC-055E-8	71247	LC-055H-4	71788	LC-059E-13S	71274S
LC-051D-13	71017	LC-051F-9S	71394S	LC-055E-8S	71247S	LC-055H-4S	71788S	LC-059E-14	71275
LC-051D-13S	71017S	LC-051G-1	71518	LC-055E-9	71249	LC-055H-5	71788I	LC-059E-14S	71275S
LC-051D-14	71018	LC-051G-10	71527	LC-055E-9S	71249S	LC-055H-5S	71788I	LC-059E-15	71276
LC-051D-14S	71018S	LC-051G-10S	71527S	LC-055F-1	71397	LC-055H-6	717		

Lee Spring / Century Spring Part Numbers



Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
LC-059E-18	71279	LC-063F-8S	71426S	LC-063HJ-1S	71889S	LC-067F-2S	71431S	LC-067HJ-10	71910
LC-059E-18S	71279S	LC-063F-9	71427	LC-063HJ-2	71890	LC-067F-3	71432	LC-067HJ-10S	71910S
LC-059E-19	71280	LC-063F-9S	71427S	LC-063HJ-2S	71890S	LC-067F-3S	71432S	LC-067HJ-11	71911
LC-059E-19S	71280S	LC-063G-1	71560	LC-063HJ-3	71891	LC-067F-4	71433	LC-067HJ-11S	71911S
LC-059E-1S	71262S	LC-063G-10	71570	LC-063HJ-3S	71891S	LC-067F-4S	71433S	LC-067HJ-12	71912
LC-059E-2	71263	LC-063G-10S	71570S	LC-063HJ-4	71892	LC-067F-5	71434	LC-067HJ-12S	71912S
LC-059E-2S	71263S	LC-063G-11	71571	LC-063HJ-4S	71892S	LC-067F-5S	71434S	LC-067HJ-1S	71901S
LC-059E-3	71264	LC-063G-11S	71571S	LC-063HJ-5	71893	LC-067F-6	71435	LC-067HJ-2	71902
LC-059E-3S	71264S	LC-063G-12	71572	LC-063HJ-5S	71893S	LC-067F-6S	71435S	LC-067HJ-2S	71902S
LC-059E-4	71265	LC-063G-12S	71572S	LC-063HJ-6	71894	LC-067F-7	71436	LC-067HJ-3	71903
LC-059E-4S	71265S	LC-063G-13	71574	LC-063HJ-6S	71894S	LC-067F-7S	71436S	LC-067HJ-3S	71903S
LC-059E-5	71266	LC-063G-13S	71574S	LC-063HJ-7	71895	LC-067F-8	71437	LC-067HJ-4	71904
LC-059E-5S	71266S	LC-063G-1S	71560S	LC-063HJ-7S	71895S	LC-067F-8S	71437S	LC-067HJ-4S	71904S
LC-059E-6	71267	LC-063G-2	71561	LC-063HJ-8	71896	LC-067G-1	71575	LC-067HJ-5	71905
LC-059E-6S	71267S	LC-063G-2S	71561S	LC-063HJ-8S	71896S	LC-067G-10	71584	LC-067HJ-5S	71905S
LC-059E-7	71268	LC-063G-3	71562	LC-063HJ-9	71897	LC-067G-10S	71584S	LC-067HJ-6	71906
LC-059E-7S	71268S	LC-063G-3S	71562S	LC-063HJ-9S	71897S	LC-067G-11	71585	LC-067HJ-6S	71906S
LC-059E-8	71269	LC-063G-4	71563	LC-063J-0	71951	LC-067G-11S	71586S	LC-067HJ-7	71907
LC-059E-8S	71269S	LC-063G-4S	71563S	LC-063J-0S	71951S	LC-067G-12	71586	LC-067HJ-7S	71907S
LC-059G-1	71546	LC-063G-5	71564	LC-063J-1	71952	LC-067G-12S	71586S	LC-067HJ-8	71908
LC-059G-10	71555	LC-063G-5S	71564S	LC-063J-10	71961	LC-067G-13	71587	LC-067HJ-8S	71908S
LC-059G-10S	71555S	LC-063G-6	71565	LC-063J-10S	71961S	LC-067G-13S	71587S	LC-067HJ-9	71909
LC-059G-11	71556	LC-063G-6S	71565S	LC-063J-11	71962	LC-067G-15	71575S	LC-067HJ-9S	71909S
LC-059G-11S	71556S	LC-063G-7	71567	LC-063J-11S	71962S	LC-067G-2	71576	LC-067J-1	71976
LC-059G-12	71557	LC-063G-7S	71567S	LC-063J-1S	71952S	LC-067G-2S	71576S	LC-067J-10	71985
LC-059G-12S	71557S	LC-063G-8	71568	LC-063J-2	71953	LC-067G-3	71577	LC-067J-10S	71985S
LC-059G-13	71558	LC-063G-8S	71568S	LC-063J-2S	71953S	LC-067G-3S	71577S	LC-067J-11	71986
LC-059G-13S	71558S	LC-063G-9	71569	LC-063J-3	71954	LC-067G-4	71578	LC-067J-11S	71986S
LC-059G-14	71559	LC-063G-9S	71569S	LC-063J-3S	71954S	LC-067G-4S	71578S	LC-067J-12	71987
LC-059G-14S	71559S	LC-063GH-1	71685	LC-063J-4	71955	LC-067G-5	71579	LC-067J-12S	71987S
LC-059G-15	71546S	LC-063GH-10	71694	LC-063J-4S	71955S	LC-067G-5S	71579S	LC-067J-15	71976S
LC-059G-2	71547	LC-063GH-10S	71694S	LC-063J-5	71956	LC-067G-6	71580	LC-067J-2	71977
LC-059G-2S	71547S	LC-063GH-11	71695	LC-063J-5S	71956S	LC-067G-6S	71580S	LC-067J-2S	71977S
LC-059G-3	71548	LC-063GH-11S	71695S	LC-063J-6	71957	LC-067G-7	71581	LC-067J-3	71978
LC-059G-3S	71548S	LC-063GH-12	71696	LC-063J-6S	71957S	LC-067G-7S	71581S	LC-067J-3S	71978S
LC-059G-4	71549	LC-063GH-12S	71696S	LC-063J-7	71958	LC-067G-8	71582	LC-067J-4	71979
LC-059G-4S	71549S	LC-063GH-13	71697	LC-063J-7S	71958S	LC-067G-8S	71582S	LC-067J-4S	71979S
LC-059G-5	71550	LC-063GH-13S	71697S	LC-063J-8	71959	LC-067G-9	71583	LC-067J-5	71980
LC-059G-5S	71550S	LC-063GH-1S	71685S	LC-063J-8S	71959S	LC-067G-9S	71583S	LC-067J-5S	71980S
LC-059G-6	71551	LC-063GH-2	71686	LC-063J-9	71960	LC-067G-1H	71698	LC-067J-6	71981
LC-059G-6S	71551S	LC-063GH-2S	71686S	LC-063J-9S	71960S	LC-067G-10	71707	LC-067J-6S	71981S
LC-059G-7	71552	LC-063GH-3	71687	LC-063L-1	72327	LC-067G-10S	71707S	LC-067J-7	71982
LC-059G-7S	71552S	LC-063GH-3S	71687S	LC-063L-10	72336	LC-067GH-11	71708	LC-067J-7S	71982S
LC-059G-8	71553	LC-063GH-4	71688	LC-063L-10S	72336S	LC-067GH-11S	71708S	LC-067J-8	71983
LC-059G-8S	71553S	LC-063GH-4S	71688S	LC-063L-11	72337	LC-067GH-12	71709	LC-067J-8S	71983S
LC-059G-9	71554	LC-063GH-5	71689	LC-063L-11S	72337S	LC-067GH-12S	71709S	LC-067J-9	71984
LC-059G-9S	71554S	LC-063GH-5S	71689S	LC-063L-12	72338	LC-067GH-13	71710	LC-067J-9S	71984S
LC-059H-1	71753	LC-063GH-6	71690	LC-063L-12S	72338S	LC-067GH-13S	71710S	LC-067K-1	72162
LC-059H-10	71762	LC-063GH-6S	71690S	LC-063L-1S	72327S	LC-067GH-1S	71698S	LC-067K-10	72171
LC-059H-10S	71762S	LC-063GH-7	71691	LC-063L-2	72328	LC-067GH-2	71699	LC-067K-10S	72171S
LC-059H-11	71763	LC-063GH-7S	71691S	LC-063L-2S	72328S	LC-067GH-2S	71699S	LC-067K-13	72162S
LC-059H-11S	71763S	LC-063GH-8	71692	LC-063L-3	72329	LC-067GH-3	71700	LC-067K-2	72163
LC-059H-12	71764	LC-063GH-8S	71692S	LC-063L-3S	72329S	LC-067GH-3S	71700S	LC-067K-2S	72163S
LC-059H-12S	71764S	LC-063GH-9	71693	LC-063L-4	72330	LC-067GH-4	71701	LC-067K-3	72164
LC-059H-1S	71753S	LC-063GH-9S	71693S	LC-063L-4S	72330S	LC-067GH-4S	71701S	LC-067K-3S	72164S
LC-059H-2	71754	LC-063H-1	71765	LC-063L-5	72331	LC-067GH-5	71702	LC-067K-4	72165
LC-059H-2S	71754S	LC-063H-10	71774	LC-063L-5S	72331S	LC-067GH-5S	71702S	LC-067K-4S	72165S
LC-059H-3	71755	LC-063H-10S	71774S	LC-063L-6	72332	LC-067GH-6	71703	LC-067K-5	72166
LC-059H-3S	71755S	LC-063H-11	71775	LC-063L-6S	72332S	LC-067GH-6S	71703S	LC-067K-5S	72166S
LC-059H-4	71756	LC-063H-11S	71775S	LC-063L-7	72333	LC-067GH-7	71704	LC-067K-6	72167
LC-059H-4S	71756S	LC-063H-12	71776	LC-063L-7S	72333S	LC-067GH-7S	71704S	LC-067K-6S	72167S
LC-059H-5	71757	LC-063H-12S	71776S	LC-063L-8	72334	LC-067GH-8	71705	LC-067K-7	72168
LC-059H-5S	71757S	LC-063H-13	71777	LC-063L-8S	72334S	LC-067GH-8S	71705S	LC-067K-7S	72168S
LC-059H-6	71758	LC-063H-13S	71777S	LC-063L-9	72335	LC-067GH-9	71706	LC-067K-8	72169
LC-059H-6S	71758S	LC-063H-14	71778	LC-063L-9S	72335S	LC-067GH-9S	71706S	LC-067K-8S	72169S
LC-059H-7	71759	LC-063H-14S	71778S	LC-065J-1	71963	LC-067H-1	71779	LC-067K-9	72170
LC-059H-7S	71759S	LC-063H-1S	71765S	LC-065J-10	71972	LC-067H-10	71788	LC-067K-9S	72170S
LC-059H-8	71760	LC-063H-2	71766	LC-065J-10S	71972S	LC-067H-10S	71788S	LC-072H-0	71791
LC-059H-8S	71760S	LC-063H-2S	71766S	LC-065J-11	71973	LC-067H-11	71789	LC-072H-0S	71791S
LC-059H-9	71761	LC-063H-3	71767	LC-065J-11S	71973S	LC-067H-11S	71789S	LC-072H-1	71792
LC-059H-9S	71761S	LC-063H-3S	71767S	LC-065J-1S	71963S	LC-067H-12	71790	LC-072H-10	71801
LC-063F-1	71419	LC-063H-4	71768	LC-065J-2	71964	LC-067H-12S	71790S	LC-072H-10S	71801S
LC-063F-10	71428	LC-063H-4S	71768S	LC-065J-2S	71964S	LC-067H-1S	71779S	LC-072H-11	71802
LC-063F-10S	71428S	LC-063H-5	71769	LC-065J-3	71965	LC-067H-2	71780	LC-072H-11S	71802S
LC-063F-11	71429	LC-063H-5S	71769S	LC-065J-3S	71965S	LC-067H-2S	71780S	LC-072H-1S	71792S
LC-063F-11S	71429S	LC-063H-6	71770	LC-065J-4	71966	LC-067H-3	71781	LC-072H-2	71793
LC-063F-1S	71419S	LC-063H-6S	71770S	LC-065J-4S	71966S	LC-067H-3S	71781S	LC-072H-2S	71793S
LC-063F-2	71420	LC-063H-7	71771	LC-065J-5	71967	LC-067H-4	71782	LC-072H-3	71794
LC-063F-2S	71420S	LC-063H-7S	71771S	LC-065J-5S	71967S	LC-067H-4S	71782S	LC-072H-3S	71794S
LC-063F-3	71421	LC-063H-8	71772	LC-065J-6	71968	LC-067H-5	71783	LC-072H-4	71795
LC-063F-3S	71421S	LC-063H-8S	71772S	LC-065J-6S	71968S	LC-067H-5S	71783S	LC-072H-4S	71795S
LC-063F-4	71422	LC-063H-9	71773	LC-065J-7	71969	LC-067H-6	71784	LC-072H-5	71796
LC-063F-4S	71422S	LC-063H-9S	71773S	LC-065J-7S	71969S	LC-067H-6S	71784S	LC-072H-5S	71796S
LC-063F-5	71423	LC-063H-1J	71774	LC-065J-8	71970	LC-067H-7	71785	LC-072H-6	71797
LC-063F-5S	71423S	LC-063H-10	71774S	LC-065J-8S	71970S	LC-067H-7S	71785S	LC-072H-6S	71797S
LC-063F-6	71424	LC-063H-10S	71774S	LC-065J-9	71971	LC-067H-8	71786	LC-072H-7	71798
LC-063F-6S	71424S</td								

Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
LC-072HJ-9S	71800S	LC-072L-9S	72347S	LC-080L-6S	72372S	LC-085L-5S	72385S	LC-100K-2S	72298S
LC-072HJ-1	71913	LC-080H-1	71803	LC-080L-7	72373	LC-085L-6	72386	LC-100K-3	72299
LC-072HJ-10	71922	LC-080H-10	71812	LC-080L-7S	72373S	LC-085L-6S	72386S	LC-100K-3S	72299S
LC-072HJ-10S	71922S	LC-080H-10S	71812S	LC-080L-8	72374	LC-085L-7	72388	LC-100K-4	72300
LC-072HJ-11	71923	LC-080H-11	71813	LC-080L-8S	72374S	LC-085L-7S	72388S	LC-100K-4S	72300S
LC-072HJ-11S	71923S	LC-080H-11S	71813S	LC-080L-9	72375	LC-085L-8	72389	LC-100K-5	72301
LC-072HJ-12	71924	LC-080H-12	71814	LC-080L-9S	72375S	LC-085L-8S	72389S	LC-100K-5S	72301S
LC-072HJ-12S	71924S	LC-080H-12S	71814S	LC-082M-1	72504	LC-085L-9	72391	LC-100K-6	72302
LC-072HJ-13	71913S	LC-080H-13	71803S	LC-082M-10	72513	LC-085L-9S	72391S	LC-100K-6S	72302S
LC-072HJ-14	71914	LC-080H-2	71804	LC-082M-10S	72513S	LC-091K-1	72267	LC-100K-7	72303
LC-072HJ-23	71914S	LC-080H-2S	71804S	LC-082M-15	72504S	LC-091K-1S	72267S	LC-100K-7S	72303S
LC-072HJ-3	71915	LC-080H-3	71805	LC-082M-2	72505	LC-091K-2	72268	LC-100K-8	72304
LC-072HJ-3S	71915S	LC-080H-3S	71805S	LC-082M-2S	72505S	LC-091K-2S	72268S	LC-100K-8S	72304S
LC-072HJ-4	71916	LC-080H-4	71806	LC-082M-3	72506	LC-091K-3	72269	LC-100K-9	72305
LC-072HJ-4S	71916S	LC-080H-4S	71806S	LC-082M-3S	72506S	LC-091K-3S	72269S	LC-100K-9S	72305S
LC-072HJ-5	71917	LC-080H-5	71807	LC-082M-4	72507	LC-091K-4	72270	LC-105L-0	72417
LC-072HJ-5S	71917S	LC-080H-5S	71807S	LC-082M-4S	72507S	LC-091K-4S	72270S	LC-105L-0S	72417S
LC-072HJ-6	71918	LC-080H-6	71808	LC-082M-5	72508	LC-091K-5	72271	LC-105L-1	72418
LC-072HJ-6S	71918S	LC-080H-6S	71808S	LC-082M-5S	72508S	LC-091K-5S	72271S	LC-105L-1S	72418S
LC-072HJ-7	71919	LC-080H-7	71809	LC-082M-6	72509	LC-091K-6	72272	LC-105L-2	72419
LC-072HJ-7S	71919S	LC-080H-7S	71809S	LC-082M-6S	72509S	LC-091K-6S	72272S	LC-105L-2S	72419S
LC-072HJ-8	71920	LC-080H-8	71810	LC-082M-7	72510	LC-091K-7	72273	LC-105L-3	72420
LC-072HJ-8S	71920S	LC-080H-8S	71810S	LC-082M-7S	72510S	LC-091K-7S	72273S	LC-105L-3S	72420S
LC-072HJ-9	71921	LC-080H-9	71811	LC-082M-8	72511	LC-093M-1	72527	LC-105L-4	72421
LC-072HJ-9S	71921S	LC-080H-9S	71811S	LC-082M-8S	72511S	LC-093M-10	72536	LC-105L-4S	72421S
LC-072J-1	72015	LC-080J-1	72058	LC-082M-9	72512	LC-093M-10S	72536S	LC-105L-5	72422
LC-072J-10	72024	LC-080J-10	72067	LC-082M-9S	72512S	LC-093M-15	72527S	LC-105L-5S	72422S
LC-072J-10S	72024S	LC-080J-10S	72067S	LC-085J-1	72071	LC-093M-2	72528	LC-105L-6	72423
LC-072J-11	72026	LC-080J-11	72068	LC-085J-10	72080	LC-093M-2S	72528S	LC-105L-6S	72423S
LC-072J-11S	72026S	LC-080J-11S	72068S	LC-085J-10S	72080S	LC-093M-3	72529	LC-105L-7	72424
LC-072J-12	72027	LC-080J-12	72069	LC-085J-11	72081	LC-093M-3S	72529S	LC-105L-7S	72424S
LC-072J-12S	72027S	LC-080J-12S	72069S	LC-085J-11S	72081S	LC-093M-4	72530	LC-105L-8	72425
LC-072J-1S	72015S	LC-080J-1S	72058S	LC-085J-12	72082	LC-093M-4S	72530S	LC-105L-8S	72425S
LC-072J-2	72016	LC-080J-2	72059	LC-085J-12S	72082S	LC-093M-5	72531	LC-105L-9	72426
LC-072J-2S	72016S	LC-080J-2S	72059S	LC-085J-1S	72071S	LC-093M-5S	72531S	LC-105L-9S	72426S
LC-072J-3	72017	LC-080J-3	72060	LC-085J-2	72072	LC-093M-6	72532	LC-105M-1	72550
LC-072J-3S	72017S	LC-080J-3S	72060S	LC-085J-2S	72072S	LC-093M-6S	72532S	LC-105M-10	72559
LC-072J-4	72018	LC-080J-4	72061	LC-085J-3	72073	LC-093M-7	72533	LC-105M-10S	72559S
LC-072J-4S	72018S	LC-080J-4S	72061S	LC-085J-3S	72073S	LC-093M-7S	72533S	LC-105M-1S	72550S
LC-072J-5	72019	LC-080J-5	72062	LC-085J-4	72074	LC-093M-8	72534	LC-105M-2	72551
LC-072J-5S	72019S	LC-080J-5S	72062S	LC-085J-4S	72074S	LC-093M-8S	72534S	LC-105M-2S	72551S
LC-072J-6	72020	LC-080J-6	72063	LC-085J-5	72075	LC-095L-0	72405	LC-105M-3	72552
LC-072J-6S	72020S	LC-080J-6S	72063S	LC-085J-5S	72075S	LC-095L-00	72404S	LC-105M-4	72553
LC-072J-7	72021	LC-080J-7	72064	LC-085J-6	72076	LC-095L-00S	72404S	LC-105M-4S	72553S
LC-072J-7S	72021S	LC-080J-7S	72064S	LC-085J-6S	72076S	LC-095L-0S	72405S	LC-105M-4S	72553S
LC-072J-8	72022	LC-080J-8	72065	LC-085J-7	72077	LC-095L-1	72406	LC-105M-5	72554
LC-072J-8S	72022S	LC-080J-8S	72065S	LC-085J-7S	72077S	LC-095L-1S	72406S	LC-105M-5S	72554S
LC-072J-9	72023	LC-080J-9	72066	LC-085J-8	72078	LC-095L-2	72407	LC-105M-6	72555
LC-072J-9S	72023S	LC-080J-9S	72066S	LC-085J-8S	72078S	LC-095L-2S	72407S	LC-105M-6S	72555S
LC-072K-1	72186	LC-080K-0	72235	LC-085J-9	72079	LC-095L-3	72408	LC-105M-7	72556
LC-072K-1S	72186S	LC-080K-00	72234	LC-085J-9S	72079S	LC-095L-3S	72408S	LC-105M-7S	72556S
LC-072K-2	72187	LC-080K-00S	72234S	LC-085K-0	72248	LC-095L-4	72409	LC-105M-8	72557
LC-072K-2S	72187S	LC-080K-0S	72235S	LC-085K-00	72246	LC-095L-4S	72409S	LC-105M-8S	72557S
LC-072K-3	72188	LC-080K-1	72236	LC-085K-00S	72246S	LC-095L-5	72410	LC-105M-9	72558
LC-072K-3S	72188S	LC-080K-10	72245	LC-085K-0S	72248S	LC-095L-5S	72410S	LC-105M-9S	72558S
LC-072K-4	72189	LC-080K-10S	72245S	LC-085K-1	72249	LC-095L-6	72411	LC-112J-1	72124
LC-072K-4S	72189S	LC-080K-1S	72236S	LC-085K-10	72259	LC-095L-6S	72411S	LC-112J-10	72123S
LC-072K-5	72190	LC-080K-2	72237	LC-085K-10S	72259S	LC-095L-7	72412	LC-112J-10S	72123S
LC-072K-6	72191	LC-080K-3	72238	LC-085K-11	72260	LC-095L-7S	72412S	LC-112J-11	72124
LC-072K-6S	72191S	LC-080K-3S	72238S	LC-085K-11S	72260S	LC-095L-8	72413	LC-112J-11S	72124S
LC-072K-7	72192	LC-080K-4	72239	LC-085K-12	72250	LC-095L-9	72414	LC-112J-12	72125
LC-072K-7S	72192S	LC-080K-4S	72239S	LC-085K-2S	72250S	LC-095L-9S	72414S	LC-112J-1S	72124S
LC-072K-8	72193	LC-080K-5	72240	LC-085K-3	72251	LC-098K-0	72288	LC-112J-2	72125
LC-072K-8S	72193S	LC-080K-5S	72240S	LC-085K-3S	72251S	LC-098K-00	72287	LC-112J-2S	72125S
LC-072K-9	72194	LC-080K-6	72241	LC-085K-4	72252	LC-098K-00S	72287S	LC-112J-3	72126
LC-072K-9S	72194S	LC-080K-6S	72241S	LC-085K-4S	72252S	LC-098K-0S	72288S	LC-112J-3S	72126S
LC-072L-1	72339	LC-080K-7	72242	LC-085K-5	72253	LC-098K-1	72289	LC-112J-4	72127
LC-072L-10	72348	LC-080K-7S	72242S	LC-085K-5S	72253S	LC-098K-1S	72289S	LC-112J-4S	72127S
LC-072L-10S	72348S	LC-080K-8	72243	LC-085K-6	72254	LC-098K-2	72290	LC-112J-5	72128
LC-072L-11	72349	LC-080K-8S	72243S	LC-085K-6S	72254S	LC-098K-2S	72290S	LC-112J-5S	72128S
LC-072L-11S	72349S	LC-080K-9	72244	LC-085K-7	72255	LC-098K-3	72291	LC-112J-6	72129
LC-072L-12	72350	LC-080K-9S	72244S	LC-085K-7S	72255S	LC-098K-3S	72291S	LC-112J-6S	72129S
LC-072L-12S	72350S	LC-080L-1	72367	LC-085K-8	72256	LC-098K-4	72292	LC-112J-7	72130
LC-072L-1S	72339S	LC-080L-10	72376	LC-085K-8S	72256S	LC-098K-4S	72292S	LC-112J-7S	72130S
LC-072L-2	72340	LC-080L-10S	72376S	LC-085K-9	72257	LC-098K-5	72293	LC-112J-8	72131
LC-072L-2S	72340S	LC-080L-11	72377	LC-085K-9S	72257S	LC-098K-5S	72293S	LC-112J-8S	72131S
LC-072L-3	72341	LC-080L-11S	72377S	LC-085L-1	72380	LC-098K-6	72294	LC-112J-9	72132
LC-072L-3S	72341S	LC-080L-12	72378	LC-085L-10	72392	LC-098K-6S	72294S	LC-112J-9S	72132S
LC-072L-4	72342	LC-080L-12S	72378S	LC-085L-10S	72392S	LC-098K-7	72295	LC-112L-0	72430
LC-072L-4S	72342S	LC-080L-1S	72367S	LC-085L-11	72393	LC-098K-7S	72295S	LC-112L-0S	72430S
LC-072L-5	72343	LC-080L-2	72368	LC-085L-11S	72393S	LC-098K-8	72296	LC-112L-1	72431
LC-072L-5S	72343S	LC-080L-2S	72368S	LC-085L-1S	72380S	LC-098K-8S	72296S	LC-112L-1S	72431S
LC-072L-6	72344	LC-080L-3	72369	LC-085L-2	72381	LC-090M-9	72295	LC-112L-2	72432
LC-072L-6S	72344S	LC-080L-3S	72369S	LC-085L-2S	72381S	LC-090M-9S	72295S	LC-112L-2S	72432S
LC-072L-7	72345	LC-080L-4	72370	LC-085L-3	72382	LC-100K-1	72297	LC-112L-3	72433
LC-072L-7S	72345S	LC-080L-4S	72370S	LC-085L-3S	72382S	LC-100K-10	72306	LC-112L-3S	72433S
LC-072L-8	72346	LC-080L-							

Lee Spring / Century Spring Part Numbers



Lee Spring/Century Spring Part Numbers

Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
316 Compression Springs									
LC-112L-5S	72435S	LC-125L-6S	72464S	LHC-148J-5S	72622S	LHC-187R-4S	72859S	CI 006A 01	60019S
LC-112L-6	72436	LC-125L-7	72465	LHC-148J-6	72623	LHC-187R-5	72860	CI 006A 02	60020S
LC-112L-6S	72436S	LC-125L-7S	72465S	LHC-148J-6S	72623S	LHC-187R-5S	72860S	CI 006A 03	60021S
LC-112L-7	72437	LC-125L-8	72466	LHC-148J-7	72624	LHC-187R-6	72861	CI 006A 04	60022S
LC-112L-7S	72437S	LC-125L-8S	72466S	LHC-148J-7S	72624S	LHC-187R-6S	72861S	CI 006A 05	60023S
LC-112L-8	72438	LC-125M-0	72585	LHC-148J-8	72625	LHC-187R-7	72862	CI 006A 06	60024S
LC-112L-8S	72438S	LC-125M-0S	72585S	LHC-148J-8S	72625S	LHC-187R-7S	72862S	CI 006A 07	60025S
LC-112L-9	72439	LC-125M-2	72587	LHC-148J-9	72626	LHC-187R-8	72863	CI 006A 08	60026S
LC-112L-9S	72439S	LC-125M-2S	72587S	LHC-148J-9S	72626S	LHC-187R-8S	72863S	CI 006A 09	60027S
LC-112M-0	72563	LC-125M-3	72588	LHC-156M-1	72721	LHC-207S-1	72864	CI 006AA 01	60001S
LC-112M-00	72561	LC-125M-3S	72588S	LHC-156M-1S	72721S	LHC-207S-1S	72864S	CI 006AA 02	60002S
LC-112M-00S	72561S	LC-125M-4	72589	LHC-156M-2	72722	LHC-207S-2	72865	CI 006AA 03	60003S
LC-112M-0S	72563S	LC-125M-4S	72589S	LHC-156M-2S	72722S	LHC-207S-2S	72865S	CI 006AA 04	60004S
LC-112M-1	72564	LC-125M-5	72590	LHC-156M-3	72723	LHC-207S-3	72866	CI 006AA 05	60005S
LC-112M-1S	72564S	LC-125M-5S	72590S	LHC-156M-3S	72723S	LHC-207S-3S	72866S	CI 006AA 06	60006S
LC-112M-2	72565	LC-125M-6	72591	LHC-156M-4	72724	LHC-207S-4	72867	CI 006AA 07	60007S
LC-112M-2S	72565S	LC-125M-6S	72591S	LHC-156M-4S	72724S	LHC-207S-4S	72867S	CI 006AA 08	60008S
LC-112M-3	72566	LC-125M-7	72592	LHC-156M-5	72725	LHC-207S-5	72868	CI 006AA 09	60009S
LC-112M-3S	72566S	LC-125M-7S	72592S	LHC-156M-5S	72725S	LHC-207S-5S	72868S	CI 007A 01	60028S
LC-112M-4	72567	LC-125M-8	72593	LHC-156M-6	72726	LHC-207S-6	72869	CI 007A 02	60029S
LC-112M-4S	72567S	LC-125M-8S	72593S	LHC-156M-6S	72726S	LHC-207S-6S	72869S	CI 007A 03	60030S
LC-112M-5	72568	LC-12KM-1	72586	LHC-156M-7	72727	LHC-207S-7	72870	CI 007A 04	60031S
LC-112M-5S	72568S	LC-12KM-1S	72586S	LHC-156M-7S	72727S	LHC-207S-7S	72870S	CI 007A 05	60032S
LC-112M-6	72569	LC-135M-0	72594	LHC-156M-8	72728	LHC-207S-8	72871	CI 007A 06	60033S
LC-112M-6S	72569S	LC-135M-0S	72594S	LHC-156M-8S	72728S	LHC-207S-8S	72871S	CI 007A 07	60034S
LC-112M-7	72570	LC-135M-1	72597	LHC-162N-0	72732	LHC-207U-1	72985	CI 007A 08	60035S
LC-112M-7S	72570S	LC-135M-1S	72597S	LHC-162N-0S	72732S	LHC-207U-1S	72985S	CI 007A 09	60036S
LC-112M-8	72571	LC-135M-2	72598	LHC-162N-1	72733	LHC-207U-2	72986	CI 007A 10	60037S
LC-112M-8S	72571S	LC-135M-2S	72598S	LHC-162N-10	72742	LHC-207U-2S	72986S	CI 007A 11	60038S
LC-115L-1	72440	LC-135M-3	72599	LHC-162N-10S	72742S	LHC-207U-3	72987	CI 007AA 01	60010S
LC-115L-1S	72440S	LC-135M-3S	72599S	LHC-162N-1S	72733S	LHC-207U-3S	72987S	CI 007AA 02	60011S
LC-115L-2	72441	LC-135M-4	72600	LHC-162N-2	72734	LHC-207U-4	72988	CI 007AA 03	60012S
LC-115L-2S	72441S	LC-135M-4S	72600S	LHC-162N-2S	72734S	LHC-207U-4S	72988S	CI 007AA 04	60013S
LC-115L-3	72442	LC-135M-5	72601	LHC-162N-3	72735	LHC-207U-5	72989	CI 007AA 05	60014S
LC-115L-3S	72442S	LC-135M-5S	72601S	LHC-162N-3S	72735S	LHC-207U-5S	72989S	CI 007AA 06	60015S
LC-115L-4	72443	LC-135M-6	72602	LHC-162N-4	72736	LHC-207U-6	72990	CI 007AA 07	60016S
LC-115L-4S	72443S	LC-135M-6S	72602S	LHC-162N-4S	72736S	LHC-207U-6S	72990S	CI 007AA 08	60017S
LC-115L-5	72444	LC-135M-7	72603	LHC-162N-5	72737	LHC-207U-7	72991	CI 007AA 09	60018S
LC-115L-5S	72444S	LC-135M-7S	72603S	LHC-162N-5S	72737S	LHC-207U-7S	72991S	CI 007AB 01	60046S
LC-115L-6	72445	LC-135M-8	72604	LHC-162N-6	72738	LHC-207U-8	72992	CI 007AB 02	60047S
LC-115L-6S	72445S	LC-135M-8S	72604S	LHC-162N-6S	72738S	LHC-207U-8S	72992S	CI 007AB 03	60048S
LC-115L-7	72446	LC-135N-1	72696	LHC-162N-7	72739	LHC-218T-1	72917	CI 007AB 04	60049S
LC-115L-7S	72446S	LC-135N-1S	72696S	LHC-162N-7S	72739S	LHC-218T-1S	72917S	CI 007AB 05	60050S
LC-12M-7	72578	LC-135N-2	72699	LHC-162N-8	72740	LHC-218T-2	72918	CI 007AB 06	60051S
LC-12M-7S	72578S	LC-135N-2S	72699S	LHC-162N-8S	72740S	LHC-218T-2S	72918S	CI 007AB 07	60052S
LC-120L-0	72447	LC-135N-3	72700	LHC-162N-9	72741	LHC-218T-3	72919	CI 007AB 08	60053S
LC-120L-0S	72447S	LC-135N-3S	72700S	LHC-162N-9S	72741S	LHC-218T-3S	72919S	CI 007AB 09	60054S
LC-120L-1	72448	LC-135N-4	72701	LHC-162P-0	72766	LHC-218T-4	72920	CI 008A 01	60037S
LC-120L-1S	72448S	LC-135N-4S	72701S	LHC-162P-0S	72766S	LHC-218T-4S	72920S	CI 008A 02	60038S
LC-120L-2	72449	LC-135N-5	72702	LHC-162P-1	72767	LHC-218T-5	72921	CI 008A 03	60039S
LC-120L-2S	72449S	LC-135N-5S	72702S	LHC-162P-1S	72767S	LHC-218T-5S	72921S	CI 008A 04	60040S
LC-120L-3	72450	LC-135N-6	72703	LHC-162P-2	72768	LHC-218T-6	72922	CI 008A 05	60041S
LC-120L-3S	72450S	LC-135N-6S	72703S	LHC-162P-2S	72768S	LHC-218T-6S	72922S	CI 008A 06	60042S
LC-120L-4	72451	LC-35B-6	70449	LHC-162P-3	72769	LHC-218T-7	72923	CI 008A 07	60043S
LC-120L-4S	72451S	LC-35B-6S	70449S	LHC-162P-3S	72769S	LHC-218T-7S	72923S	CI 008A 08	60044S
LC-120L-5	72452	LHC-142H-2	72607	LHC-162P-4	72770	LHC-218T-8	72924	CI 008A 09	60045S
LC-120L-5S	72452S	LHC-142H-2S	72607S	LHC-162P-4S	72770S	LHC-218T-8S	72924S	CI 008AB 01	60055S
LC-120L-6	72453	LHC-142H-5	72612	LHC-162P-5	72771	LHC-234T-1	72925	CI 008AB 02	60056S
LC-120L-6S	72453S	LHC-142H-5S	72612S	LHC-162P-5S	72771S	LHC-234T-1S	72925S	CI 008AB 03	60057S
LC-120L-7	72454	LHC-142J-0	72605	LHC-162P-6	72772	LHC-234T-2	72926	CI 008AB 04	60058S
LC-120L-7S	72454S	LHC-142J-0S	72605S	LHC-162P-6S	72772S	LHC-234T-2S	72926S	CI 008AB 05	60059S
LC-120M-1	72572	LHC-142J-1	72606	LHC-162P-7	72773	LHC-234T-3	72927	CI 008AB 06	60060S
LC-120M-10	72581	LHC-142J-1S	72606S	LHC-162P-7S	72773S	LHC-234T-3S	72927S	CI 008AB 07	60061S
LC-120M-10S	72581S	LHC-142J-2	72608	LHC-162P-8	72774	LHC-234T-4	72928	CI 008AB 08	60062S
LC-120M-1S	72572S	LHC-142J-2S	72608S	LHC-162P-8S	72774S	LHC-234T-4S	72928S	CI 008AB 09	60063S
LC-120M-2	72573	LHC-142J-3	72609	LHC-177P-0	72775	LHC-234T-5	72929	CI 008B 01	60082S
LC-120M-2S	72573S	LHC-142J-3S	72609S	LHC-177P-0S	72775S	LHC-234T-5S	72929S	CI 008B 02	60083S
LC-120M-3	72574	LHC-142J-4	72610	LHC-177P-1	72776	LHC-234T-6	72930	CI 008B 03	60084S
LC-120M-3S	72574S	LHC-142J-4S	72610S	LHC-177P-1S	72776S	LHC-234T-6S	72930S	CI 008B 04	60085S
LC-120M-4	72575	LHC-142J-5	72611	LHC-177P-2	72777	LHC-234T-7	72931	CI 008B 05	60086S
LC-120M-4S	72575S	LHC-142J-5S	72611S	LHC-177P-2S	72777S	LHC-234T-7S	72931S	CI 008B 06	60087S
LC-120M-5	72576	LHC-142J-6	72613	LHC-177P-3	72778	LHC-234T-8	72932	CI 008B 07	60088S
LC-120M-5S	72576S	LHC-142J-6S	72613S	LHC-177P-3S	72778S	LHC-234T-8S	72932S	CI 008B 08	60089S
LC-120M-6	72577	LHC-142J-7	72614	LHC-177P-4	72779	LHC-250U-1	73009	CI 008B 09	60090S
LC-120M-6S	72577S	LHC-142J-7S	72614S	LHC-177P-4S	72779S	LHC-250U-1S	73009S	CI 008B 10	60091S
LC-120M-8	72579	LHC-142J-8	72615	LHC-177P-5	72780	LHC-250U-2	73010	CI 008B 11	60092S
LC-120M-8S	72579S	LHC-142J-8S	72615S	LHC-177P-5S	72780S	LHC-250U-2S	73010S	CI 008BC 01	60118S
LC-120M-9	72580	LHC-142J-9	72616	LHC-177P-6	72781	LHC-250U-3	73011	CI 008BC 02	60119S
LC-120M-9S	72580S	LHC-142J-9S	72616S	LHC-177P-6S	72781S	LHC-250U-3S	73011S	CI 008BC 03	60120S
LC-125L-1	72458	LHC-148J-0	72617	LHC-177P-7	72782	LHC-250U-4	73012	CI 008BC 04	60121S
LC-125L-1S	72458S	LHC-148J-0S	72617S	LHC-177P-7S	72782S	LHC-250U-4S	73012S	CI 008BC 05	60122S
LC-125L-2	72459	LHC-148J-1	72618	LHC-177P-8	72783	LHC-250U-5	73013	CI 008BC 06	60123S
LC-125L-2S	72459S	LHC-148J-1S	72618S	LHC-177P-8S	72783S	LHC-250U-5S	73013S	CI 008BC 07	60124S
LC-125L-3	72460	LHC-148J-2	72619	LHC-178R-1	72856	LHC-250U-6	73014	CI 008BC 08	60125S
LC-125L-3S	72460S	LHC-148J-2S	72619S	LHC-178R-1S	72856S	LHC-250U-6S	73014S	CI 008BC 09	60126S
LC-125L-4	72461	LHC-148J-3	72620	LHC-178R-2	72857	LHC-250U-7	73015	CI 008C 01	6

Lee Spring / Century Spring Part Numbers

Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
CI 008C 06	60154S	CI 010EF 01	60300S	CI 012B 07	60112S	CI 012EG 10	60389S	LC 014B 11	60658S
CI 008C 07	60155S	CI 010EF 02	60301S	CI 012B 08	60113S	CI 012EG 11	60390S	LC 014B 12	60659S
CI 008C 08	60156S	CI 010EF 03	60302S	CI 012B 09	60114S	CI 012EG 12	60391S	LC 014B 13	60660S
CI 008C 09	60157S	CI 010EF 04	60303S	CI 012B 10	60115S	CI 012EG 13	60392S	LC 014B 14	60661S
CI 008C 10	60158S	CI 010EF 05	60304S	CI 012B 11	60116S	CI 013DE 01	60258S	LC 014BB 01	60810S
CI 009AB 01	60064S	CI 010EF 06	60305S	CI 012B 12	60117S	CI 013DE 02	60259S	LC 014BB 02	60811S
CI 009AB 02	60065S	CI 010EF 07	60306S	CI 012BC 01	60136S	CI 013DE 03	60260S	LC 014BB 03	60812S
CI 009AB 03	60066S	CI 010EF 08	60307S	CI 012BC 02	60137S	CI 013DE 04	60261S	LC 014BB 04	60813S
CI 009AB 04	60067S	CI 010EF 09	60308S	CI 012BC 03	60138S	CI 013DE 05	60262S	LC 014BB 05	60814S
CI 009AB 05	60068S	CI 010EF 10	60309S	CI 012BC 04	60139S	CI 013DE 06	60263S	LC 014BB 06	60815S
CI 009AB 06	60069S	CI 010EF 11	60310S	CI 012BC 05	60140S	CI 013E 01	60288S	LC 014BB 07	60816S
CI 009AB 07	60070S	CI 010EF 12	60311S	CI 012BC 06	60141S	CI 013E 02	60289S	LC 014BB 08	60817S
CI 009AB 08	60071S	CI 010EF 13	60312S	CI 012BC 07	60142S	CI 013E 03	60290S	LC 014BB 09	60818S
CI 009AB 09	60072S	CI 010EF 14	60313S	CI 012BC 08	60143S	CI 013E 04	60291S	LC 014BB 10	60819S
CI 010AB 01	60073S	CI 010EG 01	60354S	CI 012BC 09	60144S	CI 013E 05	60292S	LC 014BB 11	60820S
CI 010AB 02	60074S	CI 010EG 02	60355S	CI 012BC 10	60145S	CI 013E 06	60293S	LC 014BB 12	60821S
CI 010AB 03	60075S	CI 010EG 03	60356S	CI 012BC 11	60146S	CI 013E 07	60294S	LC 014BB 13	60822S
CI 010AB 04	60076S	CI 010EG 04	60357S	CI 012BC 12	60147S	CI 013E 08	60295S	LC 014BB 14	60823S
CI 010AB 05	60077S	CI 010EG 05	60358S	CI 012BC 13	60148S	CI 013E 09	60296S	LC 016A 0	60422S
CI 010AB 06	60078S	CI 010EG 06	60359S	CI 012C 01	60179S	CI 013E 10	60297S	LC 016A 01	60423S
CI 010AB 07	60079S	CI 010EG 07	60360S	CI 012C 02	60180S	CI 013E 11	60298S	LC 016A 02	60424S
CI 010AB 08	60080S	CI 010EG 08	60361S	CI 012C 03	60181S	CI 013E 12	60299S	LC 016A 03	60425S
CI 010AB 09	60081S	CI 010EG 09	60362S	CI 012C 04	60182S	CI 013E 01	60342S	LC 016A 04	60426S
CI 010B 01	60093S	CI 010EG 10	60363S	CI 012C 05	60183S	CI 013E 02	60343S	LC 016A 05	60427S
CI 010B 02	60094S	CI 010EG 11	60364S	CI 012C 06	60184S	CI 013E 03	60344S	LC 016A 06	60428S
CI 010B 03	60095S	CI 010EG 12	60365S	CI 012C 07	60185S	CI 013E 04	60345S	LC 016A 07	60429S
CI 010B 04	60096S	CI 010EG 13	60366S	CI 012C 08	60186S	CI 013E 05	60346S	LC 016A 08	60430S
CI 010B 05	60097S	CI 011C 01	60169S	CI 012C 09	60187S	CI 013E 06	60347S	LC 016A 09	60431S
CI 010B 06	60098S	CI 011C 02	60170S	CI 012C 10	60188S	CI 013E 07	60348S	LC 016A 10	60432S
CI 010B 07	60099S	CI 011C 03	60171S	CI 012D 01	60212S	CI 013E 08	60349S	LC 016A 11	60433S
CI 010B 08	60100S	CI 011C 04	60172S	CI 012D 02	60213S	CI 013E 09	60350S	LC 016A 12	60434S
CI 010B 09	60101S	CI 011C 05	60173S	CI 012D 03	60214S	CI 013E 10	60351S	LC 016A 13	60435S
CI 010B 10	60102S	CI 011C 06	60174S	CI 012D 04	60215S	CI 013E 11	60352S	LC 016AA 01	60513S
CI 010B 11	60103S	CI 011C 07	60175S	CI 012D 05	60216S	CI 013E 12	60353S	LC 016AA 02	60514S
CI 010B 12	60104S	CI 011C 08	60176S	CI 012D 06	60217S	CI 013E 01	60393S	LC 016AA 03	60515S
CI 010B 13	60105S	CI 011C 09	60177S	CI 012D 07	60218S	CI 013E 02	60394S	LC 016AA 04	60516S
CI 010BC 01	60127S	CI 011C 10	60178S	CI 012D 08	60220S	CI 013E 03	60395S	LC 016AA 05	60517S
CI 010BC 02	60128S	CI 011D 01	60202S	CI 012D 09	60222S	CI 013E 04	60396S	LC 016AA 06	60518S
CI 010BC 03	60129S	CI 011D 02	60203S	CI 012D 10	60224S	CI 013E 05	60397S	LC 016AA 07	60519S
CI 010BC 04	60130S	CI 011D 03	60204S	CI 012D 11	60225S	CI 013E 06	60398S	LC 016AA 08	60520S
CI 010BC 05	60131S	CI 011D 04	60205S	CI 012D 12	60226S	CI 013E 07	60399S	LC 016AA 09	60521S
CI 010BC 06	60132S	CI 011D 05	60206S	CI 012D 13	60227S	CI 013E 08	60400S	LC 016AA 10	60522S
CI 010BC 07	60133S	CI 011D 06	60207S	CI 012D 7A	60219S	CI 013E 09	60401S	LC 016AA 11	60523S
CI 010BC 08	60134S	CI 011D 07	60208S	CI 012D 8A	60221S	CI 013E 10	60402S	LC 016AA 12	60524S
CI 010BC 09	60135S	CI 011D 08	60209S	CI 012D 9A	60223S	CI 013E 11	60403S	LC 016AA 13	60525S
CI 010C 01	60159S	CI 011D 09	60210S	CI 012D 01	60248S	CI 013E 12	60404S	LC 016AA 14	60526S
CI 010C 02	60160S	CI 011D 10	60211S	CI 012D 02	60249S	CI 013E 13	60405S	LC 016AB 01	60565S
CI 010C 03	60161S	CI 011DE 01	60238S	CI 012D 03	60250S	LC 014A 01	60406S	LC 016AB 02	60566S
CI 010C 04	60162S	CI 011DE 02	60239S	CI 012D 04	60251S	LC 014A 02	60407S	LC 016AB 03	60567S
CI 010C 05	60163S	CI 011DE 03	60240S	CI 012D 05	60252S	LC 014A 03	60408S	LC 016AB 04	60568S
CI 010C 06	60164S	CI 011DE 04	60241S	CI 012D 06	60253S	LC 014A 04	60409S	LC 016AB 05	60569S
CI 010C 07	60165S	CI 011DE 05	60242S	CI 012D 07	60254S	LC 014A 05	60410S	LC 016AB 06	60570S
CI 010C 08	60166S	CI 011DE 06	60243S	CI 012D 08	60255S	LC 014A 06	60411S	LC 016AB 07	60571S
CI 010C 09	60167S	CI 011DE 07	60244S	CI 012D 09	60256S	LC 014A 07	60412S	LC 016AB 08	60572S
CI 010C 10	60168S	CI 011DE 08	60245S	CI 012D 10	60257S	LC 014A 08	60413S	LC 016AB 09	60573S
CI 010D 01	60189S	CI 011DE 09	60246S	CI 012E 01	60276S	LC 014A 09	60414S	LC 016AB 10	60574S
CI 010D 02	60190S	CI 011DE 10	60247S	CI 012E 02	60277S	LC 014A 10	60418S	LC 016AB 11	60575S
CI 010D 03	60191S	CI 011EF 01	60314S	CI 012E 03	60278S	LC 014A 11	60419S	LC 016AB 12	60576S
CI 010D 04	60192S	CI 011EF 02	60315S	CI 012E 04	60279S	LC 014A 12	60420S	LC 016AB 13	60577S
CI 010D 05	60193S	CI 011EF 03	60316S	CI 012E 05	60280S	LC 014A 13	60421S	LC 016AB 14	60578S
CI 010D 06	60194S	CI 011EF 04	60317S	CI 012E 06	60281S	LC 014A 14	60415S	LC 016AC 01	60621S
CI 010D 07	60195S	CI 011EF 05	60318S	CI 012E 07	60282S	LC 014A 15	60416S	LC 016AC 02	60622S
CI 010D 08	60196S	CI 011EF 06	60319S	CI 012E 08	60283S	LC 014A 16	60417S	LC 016AC 03	60623S
CI 010D 09	60197S	CI 011EF 07	60320S	CI 012E 09	60284S	LC 014A 01	60496S	LC 016AC 04	60624S
CI 010D 10	60198S	CI 011EF 08	60321S	CI 012E 10	60285S	LC 014A 02	60497S	LC 016AC 05	60625S
CI 010D 11	60199S	CI 011EF 09	60322S	CI 012E 11	60286S	LC 014A 03	60498S	LC 016AC 06	60626S
CI 010D 12	60200S	CI 011EF 10	60323S	CI 012E 12	60287S	LC 014A 04	60499S	LC 016AC 07	60627S
CI 010D 13	60201S	CI 011EF 11	60324S	CI 012EF 01	60328S	LC 014A 05	60500S	LC 016AC 08	60628S
CI 010DE 01	60228S	CI 011EF 12	60325S	CI 012EF 02	60329S	LC 014A 06	60501S	LC 016AC 09	60629S
CI 010DE 02	60229S	CI 011EF 13	60326S	CI 012EF 03	60330S	LC 014A 07	60502S	LC 016AC 10	60630S
CI 010DE 03	60230S	CI 011EF 14	60327S	CI 012EF 04	60331S	LC 014A 08	60503S	LC 016AC 11	60631S
CI 010DE 04	60231S	CI 011EG 01	60367S	CI 012EF 05	60332S	LC 014A 09	60504S	LC 016AC 12	60632S
CI 010DE 05	60232S	CI 011EG 02	60368S	CI 012EF 06	60333S	LC 014A 10	60505S	LC 016AC 13	60633S
CI 010DE 06	60233S	CI 011EG 03	60369S	CI 012EF 07	60334S	LC 014A 11	60506S	LC 016B 01	60662S
CI 010DE 07	60234S	CI 011EG 04	60370S	CI 012EF 08	60335S	LC 014A 12	60507S	LC 016B 02	60663S
CI 010DE 08	60235S	CI 011EG 05	60371S	CI 012EF 09	60336S	LC 014A 13	60508S	LC 016B 03	60664S
CI 010DE 09	60236S	CI 011EG 06	60372S	CI 012EF 10	60337S	LC 014A 14	60509S	LC 016B 04	60665S
CI 010DE 10	60237S	CI 011EG 07	60373S	CI 012EF 11	60338S	LC 014A 15	60510S	LC 016B 05	60666S
CI 010E 01	60264S	CI 011EG 08	60374S	CI 012EF 12	60339S	LC 014A 16	60511S	LC 016B 06	60667S
CI 010E 02	60265S	CI 011EG 09	60375S	CI 012EF 13	60340S	LC 014A 17	60512S	LC 016B 07	60668S
CI 010E 03	60266S	CI 011EG 10	60376S	CI 012EF 14	60341S	LC 014B 01	60648S	LC 016B 08	60669S
CI 010E 04	60267S	CI 011EG 11	60377S	CI 012EG 01	60380S	LC 014B 02	60649S	LC 016B 09	60670S
CI 010E 05	60268S	CI 011EG 12	60378S	CI 012EG 02	60381S	LC 014B 03	60650S	LC 016B 10	60671S
CI 010E 06	60269S	CI 011EG 13	60379S	CI 012EG 03	60382S	LC 014B 04	60651S	LC 016B 11	60

Lee Spring / Century Spring Part Numbers



Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
LC 018A 02	60438S	LC 020AA 06	60545S	LC 022B 11	60717S	LC 026B 11	60748S	LC 032BB 13	60917S
LC 018A 03	60439S	LC 020AA 07	60546S	LC 022B 12	60718S	LC 026B 12	60749S	LC 032BB 14	60918S
LC 018A 04	60440S	LC 020AA 08	60547S	LC 022B 13	60719S	LC 026B 13	60750S	LC 032BB 15	60919S
LC 018A 05	60441S	LC 020AA 09	60548S	LC 022B 14	60720S	LC 026B 14	60751S	LC 032BB 16	60920S
LC 018A 06	60442S	LC 020AA 10	60549S	LC 022B 15	60721S	LC 026B 15	60752S	LC 032BB 17	60921S
LC 018A 07	60443S	LC 020AA 11	60550S	LC 022B 16	60722S	LC 026B 16	60753S	LC 032BB 18	60922S
LC 018A 08	60444S	LC 020AA 12	60551S	LC 023AB 01	60607S	LC 026B 17	60754S	LC 032BB 19	60923S
LC 018A 09	60445S	LC 020AA 13	60552S	LC 023AB 02	60608S	LC 026BB 01	60871S	LC 035B 01	60792S
LC 018A 10	60446S	LC 020B 01	60692S	LC 023AB 03	60609S	LC 026BB 02	60872S	LC 035B 02	60793S
LC 018A 11	60447S	LC 020B 02	60693S	LC 023AB 04	60610S	LC 026BB 03	60873S	LC 035B 03	60794S
LC 018A 12	60448S	LC 020B 03	60694S	LC 023AB 05	60611S	LC 026BB 04	60874S	LC 035B 04	60795S
LC 018A 13	60449S	LC 020B 04	60695S	LC 023AB 06	60612S	LC 026BB 05	60875S	LC 035B 05	60796S
LC 018AA 01	60527S	LC 020B 05	60696S	LC 023AB 07	60613S	LC 026BB 06	60876S	LC 035B 06	60797S
LC 018AA 02	60528S	LC 020B 06	60697S	LC 023AB 08	60614S	LC 026BB 07	60877S	LC 035B 07	60798S
LC 018AA 03	60529S	LC 020B 07	60698S	LC 023AB 09	60615S	LC 026BB 08	60878S	LC 035B 08	60799S
LC 018AA 04	60530S	LC 020B 08	60699S	LC 023AB 10	60616S	LC 026BB 09	60879S	LC 035B 09	60800S
LC 018AA 05	60531S	LC 020B 09	60700S	LC 023AB 11	60617S	LC 026BB 10	60880S	LC 035B 10	60801S
LC 018AA 06	60532S	LC 020B 10	60701S	LC 023AB 12	60618S	LC 026BB 11	60881S	LC 035B 11	60802S
LC 018AA 07	60533S	LC 020B 11	60702S	LC 023AB 13	60619S	LC 026BB 12	60882S	LC 035B 12	60803S
LC 018AA 08	60534S	LC 020B 12	60703S	LC 023AB 14	60620S	LC 026BB 13	60883S	LC 035B 13	60804S
LC 018AA 09	60535S	LC 020B 13	60704S	LC 023AD 01	60634S	LC 026BB 14	60884S	LC 035B 14	60805S
LC 018AA 10	60536S	LC 020B 14	60705S	LC 023AD 02	60635S	LC 026BB 15	60885S	LC 035B 15	60806S
LC 018AA 11	60537S	LC 020B 15	60706S	LC 023AD 03	60636S	LC 026BB 16	60886S	LC 035B 16	60807S
LC 018AA 12	60538S	LC 020B 01	60840S	LC 023AD 04	60637S	LC 029B 0	60755S	LC 035B 17	60808S
LC 018AA 13	60539S	LC 020B 02	60841S	LC 023AD 05	60638S	LC 029B 01	60756S	LC 035B 18	60809S
LC 018AB 01	60579S	LC 020B 03	60842S	LC 023AD 06	60639S	LC 029B 02	60757S	Extension Springs	
LC 018AB 02	60580S	LC 020B 04	60843S	LC 023AD 07	60640S	LC 029B 03	60758S	EI-007A-1	80000
LC 018AB 03	60581S	LC 020B 05	60844S	LC 023AD 08	60641S	LC 029B 04	60759S	EI-007A-1S	80000S
LC 018AB 04	60582S	LC 020B 06	60845S	LC 023AD 09	60642S	LC 029B 05	60760S	EI-007A-2	80001
LC 018AB 05	60583S	LC 020B 07	60846S	LC 023AD 10	60643S	LC 029B 06	60761S	EI-007A-2S	80001S
LC 018AB 06	60584S	LC 020B 08	60847S	LC 023AD 11	60644S	LC 029B 07	60762S	EI-007A-3	80002
LC 018AB 07	60585S	LC 020B 09	60848S	LC 023AD 12	60645S	LC 029B 08	60763S	EI-007A-3S	80002S
LC 018AB 08	60586S	LC 020B 10	60849S	LC 023AD 13	60646S	LC 029B 09	60764S	EI-007A-4	80003
LC 018AB 09	60587S	LC 020B 11	60850S	LC 023AD 14	60647S	LC 029B 10	60765S	EI-007A-4S	80003S
LC 018AB 10	60588S	LC 020B 12	60851S	LC 023BB 01	60856S	LC 029B 11	60766S	EI-007A-5	80004
LC 018AB 11	60589S	LC 020B 13	60852S	LC 023BB 02	60857S	LC 029B 12	60767S	EI-007A-5S	80004S
LC 018AB 12	60590S	LC 020B 14	60853S	LC 023BB 03	60858S	LC 029B 13	60768S	EI-008A-1	80005
LC 018AB 13	60591S	LC 020B 15	60854S	LC 023BB 04	60859S	LC 029B 14	60769S	EI-008A-1S	80005S
LC 018AB 14	60592S	LC 020B 16	60855S	LC 023BB 05	60860S	LC 029B 15	60770S	EI-008A-2	80006
LC 018B 01	60677S	LC 021AB 01	60593S	LC 023BB 06	60861S	LC 029B 16	60771S	EI-008A-2S	80006S
LC 018B 02	60678S	LC 021AB 02	60594S	LC 023BB 07	60862S	LC 029B 17	60772S	EI-008A-3	80007
LC 018B 03	60679S	LC 021AB 03	60595S	LC 023BB 08	60863S	LC 029B 18	60773S	EI-008A-3S	80007S
LC 018B 04	60680S	LC 021AB 04	60596S	LC 023BB 09	60864S	LC 029B 01	60887S	EI-008A-4	80008
LC 018B 05	60681S	LC 021AB 05	60597S	LC 023BB 10	60865S	LC 029B 02	60888S	EI-008A-4S	80008S
LC 018B 06	60682S	LC 021AB 06	60598S	LC 023BB 11	60866S	LC 029B 03	60889S	EI-008A-5	80009
LC 018B 07	60683S	LC 021AB 07	60599S	LC 023BB 12	60867S	LC 029B 04	60890S	EI-008A-5S	80009S
LC 018B 08	60684S	LC 021AB 08	60600S	LC 023BB 13	60868S	LC 029B 05	60891S	EI-008A-6	80010
LC 018B 09	60685S	LC 021AB 09	60601S	LC 023BB 14	60869S	LC 029B 06	60892S	EI-008A-6S	80010S
LC 018B 10	60686S	LC 021AB 10	60602S	LC 023BB 15	60870S	LC 029B 07	60893S	EI-008A-7	80011
LC 018B 11	60687S	LC 021AB 11	60603S	LC 024A 01	60480S	LC 029B 08	60894S	EI-008A-7S	80011S
LC 018B 12	60688S	LC 021AB 12	60604S	LC 024A 02	60481S	LC 029B 09	60895S	EI-009A-1	80012
LC 018B 13	60689S	LC 021AB 13	60605S	LC 024A 03	60482S	LC 029B 10	60896S	EI-009A-1S	80012S
LC 018B 14	60690S	LC 021AB 14	60606S	LC 024A 04	60483S	LC 029B 11	60897S	EI-009A-1S	80012S
LC 018B 15	60691S	LC 022A 01	60465S	LC 024A 05	60484S	LC 029B 12	60898S	EI-009A-2	80013
LC 018BB 01	60824S	LC 022A 02	60466S	LC 024A 06	60485S	LC 029B 13	60899S	EI-009A-2S	80013S
LC 018BB 02	60825S	LC 022A 03	60467S	LC 024A 07	60486S	LC 029B 14	60900S	EI-009A-3	80014
LC 018BB 03	60826S	LC 022A 04	60468S	LC 024A 08	60487S	LC 029B 15	60901S	EI-009A-3S	80014S
LC 018BB 04	60827S	LC 022A 05	60469S	LC 024A 09	60488S	LC 029B 16	60902S	EI-009A-4	80015
LC 018BB 05	60828S	LC 022A 06	60470S	LC 024A 10	60489S	LC 029B 17	60903S	EI-009A-4S	80015S
LC 018BB 06	60829S	LC 022A 07	60471S	LC 024A 11	60490S	LC 029B 18	60904S	EI-009A-5	80016
LC 018BB 07	60830S	LC 022A 08	60472S	LC 024A 12	60491S	LC 032B 01	60774S	EI-009A-5S	80016S
LC 018BB 08	60831S	LC 022A 09	60473S	LC 024A 13	60492S	LC 032B 02	60775S	EI-009A-6	80017
LC 018BB 09	60832S	LC 022A 10	60474S	LC 024A 14	60493S	LC 032B 03	60776S	EI-009A-6S	80017S
LC 018BB 10	60833S	LC 022A 11	60475S	LC 024A 15	60494S	LC 032B 04	60777S	EI-009A-7	80018
LC 018BB 11	60834S	LC 022A 12	60476S	LC 024A 16	60495S	LC 032B 05	60778S	EI-009A-7S	80018S
LC 018BB 12	60835S	LC 022A 13	60477S	LC 024B 01	60723S	LC 032B 06	60779S	EI-010B-1	80026
LC 018BB 13	60836S	LC 022A 14	60478S	LC 024B 02	60724S	LC 032B 07	60780S	EI-010B-1S	80026S
LC 018BB 14	60837S	LC 022A 15	60479S	LC 024B 03	60725S	LC 032B 08	60781S	EI-010B-2	80027
LC 018BB 15	60838S	LC 022AA 01	60553S	LC 024B 04	60726S	LC 032B 09	60782S	EI-010B-2S	80027S
LC 018BB 16	60839S	LC 022AA 02	60554S	LC 024B 05	60727S	LC 032B 10	60783S	EI-010B-3	80028
LC 020A 01	60450S	LC 022AA 03	60555S	LC 024B 06	60728S	LC 032B 11	60784S	EI-010B-3S	80028S
LC 020A 02	60451S	LC 022AA 04	60556S	LC 024B 07	60729S	LC 032B 12	60785S	EI-010B-4	80029
LC 020A 03	60452S	LC 022AA 05	60557S	LC 024B 08	60730S	LC 032B 13	60786S	EI-010B-4S	80029S
LC 020A 04	60453S	LC 022AA 06	60558S	LC 024B 09	60731S	LC 032B 14	60787S	EI-010B-5	80030
LC 020A 05	60454S	LC 022AA 07	60559S	LC 024B 10	60732S	LC 032B 15	60788S	EI-010B-5S	80030S
LC 020A 06	60455S	LC 022AA 08	60560S	LC 024B 11	60733S	LC 032B 16	60789S	EI-010B-6	80031
LC 020A 07	60456S	LC 022AA 09	60561S	LC 024B 12	60734S	LC 032B 17	60790S	EI-010B-6S	80031S
LC 020A 08	60457S	LC 022AA 10	60562S	LC 024B 13	60735S	LC 032B 18	60791S	EI-010B-7	203-A
LC 020A 09	60458S	LC 022AA 11	60563S	LC 024B 14	60736S	LC 032BB 01	60905S	EI-010B-7S	80032S
LC 020A 10	60459S	LC 022AA 12	60564S	LC 024B 15	60737S	LC 032BB 02	60906S	EI-011B-1	80033
LC 020A 11	60460S	LC 022B 01	60707S	LC 026B 01	60738S	LC 032BB 03	60907S	EI-011B-1S	80033S
LC 020A 12	60461S	LC 022B 02	60708S	LC 026B 02	60739S	LC 032BB 04	60908S	EI-011B-2	80034
LC 020A 13	60462S	LC 022B 03	60709S	LC 026B 03	60740S	LC 032BB 05	60909S	EI-011B-2S	80034S
LC 020A 14	60463S	LC 022B 04	60710S	LC 026B 04	60741S	LC 032BB 06	60910S	EI-011B-3	80035
LC 020A 15	60464S	LC 022B 05	60711S						

Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
EL-011B-6S	80038S	LE-018A-001S	80092S	LE-020A-5S	80111S	LE-022C-1S	80249S	LE-026C-6S	80271S
EL-011B-7	80039	LE-018A-002	80091	LE-020A-6	80112	LE-022C-2	80250	LE-026C-7	80272
EL-011B-7S	80039S	LE-018A-002S	80091S	LE-020A-6S	80112S	LE-022C-2S	80250S	LE-026C-7S	80272S
EL-012B-1	80040	LE-018A-005	80093S	LE-020A-7	80113	LE-022C-3	80251	LE-026C-8	80273
EL-012B-1S	80040S	LE-018A-005S	80094S	LE-020A-7S	80113S	LE-022C-3S	80251S	LE-026C-8S	80273S
EL-012B-2	5453	LE-018A-1	80095	LE-020A-8	80114	LE-022C-4	80252	LE-026C-9	80274
EL-012B-2S	80041S	LE-018A-1S	80095S	LE-020A-8S	80114S	LE-022C-4S	80252S	LE-026C-9S	80274S
EL-012B-3	80042	LE-018A-2	80096	LE-020B-1	80146	LE-022C-5	80253	LE-026D-1	80437
EL-012B-3S	80042S	LE-018A-2S	80096S	LE-020B-10	80155	LE-022C-5S	80253S	LE-026D-1S	80437S
EL-012B-4	80043	LE-018A-3	80097	LE-020B-10S	80155S	LE-022C-6	80254	LE-026D-2	80438
EL-012B-4S	80043S	LE-018A-3S	80097S	LE-020B-11	80156	LE-022C-6S	80254S	LE-026D-2S	80438S
EL-012B-5	80044	LE-018A-4	80098	LE-020B-11S	80156S	LE-022C-7	80255	LE-026D-3	80439
EL-012B-5S	80044S	LE-018A-4S	80098S	LE-020B-12	80157	LE-022C-7S	80255S	LE-026D-3S	80439S
EL-012B-6	80045	LE-018A-5	80099	LE-020B-12S	80157S	LE-022C-8	80256	LE-026D-4	80440
EL-012B-6S	80045S	LE-018A-5S	80099S	LE-020B-13	80158	LE-022C-8S	80256S	LE-026D-4S	80440S
EL-012B-7	203-B	LE-018A-6	80100	LE-020B-13S	80158S	LE-022C-9	80257	LE-026D-5	80441
EL-012B-7S	80046S	LE-018A-6S	80100S	LE-020B-15	80146S	LE-022C-9S	80257S	LE-026D-5S	80441S
EL-013B-1	80047	LE-018A-7	80101	LE-020B-2	80148	LE-024B-1	80172	LE-026D-6	80442
EL-013B-1S	80047S	LE-018A-7S	80101S	LE-020B-2S	80148S	LE-024B-10	80178	LE-026D-6S	80442S
EL-013B-2	80048	LE-018A-8	80102	LE-020B-3	80149	LE-024B-10S	80178S	LE-029B-1	80197
EL-013B-2S	80048S	LE-018A-8S	80102S	LE-020B-3S	80149S	LE-024B-11	80179	LE-029B-10	80203
EL-013B-3	80049	LE-018B-1	80132	LE-020B-4	80150	LE-024B-11S	80179S	LE-029B-10S	80203S
EL-013B-3S	80049S	LE-018B-10	80142	LE-020B-4S	80150S	LE-024B-12	80180	LE-029B-11	80204
EL-013B-4	80050	LE-018B-10S	80142S	LE-020B-5	80151	LE-024B-12S	80180S	LE-029B-11S	80204S
EL-013B-4S	80050S	LE-018B-11	80143	LE-020B-5S	80151S	LE-024B-13	80181	LE-029B-12	80205
EL-013B-5	80051	LE-018B-11S	80143S	LE-020B-6	80152	LE-024B-13S	80181S	LE-029B-12S	80205S
EL-013B-5S	80051S	LE-018B-12	80144	LE-020B-6S	80152S	LE-024B-14	80182	LE-029B-13	80206
EL-013B-6	80052	LE-018B-12S	80144S	LE-020B-7	80153	LE-024B-14S	80182S	LE-029B-13S	80206S
EL-013B-6S	80052S	LE-018B-13	80145	LE-020B-7S	80153S	LE-024B-15	80183	LE-029B-14	80207
EL-013B-7	80053	LE-018B-13S	80145S	LE-020B-9	80154	LE-024B-15S	80183S	LE-029B-14S	80207S
EL-013B-7S	80053S	LE-018B-15	80132S	LE-020B-9S	80154S	LE-024B-15S	80172S	LE-029B-15	80208
EL-014B-1	80054	LE-018B-2	80134	LE-022A-1	80115	LE-024B-16	80173	LE-029B-15S	80208S
EL-014B-1S	ZZ4-36	LE-018B-2S	80134S	LE-022A-10	80124	LE-024B-3S	80173S	LE-029B-1S	80197S
EL-014B-2	80055	LE-018B-3	80135	LE-022A-10S	80124S	LE-024B-5	80174	LE-029B-3	80198
EL-014B-2S	80055S	LE-018B-3S	80135S	LE-022A-11	80125	LE-024B-5S	80174S	LE-029B-3S	80198S
EL-014B-3	80056	LE-018B-4	80136	LE-022A-11S	80125S	LE-024B-7	80175	LE-029B-5	80199
EL-014B-3S	80056S	LE-018B-4S	80136S	LE-022A-12	80126	LE-024B-7S	80175S	LE-029B-5S	80199S
EL-014B-4	80057	LE-018B-5	80137	LE-022A-12S	80126S	LE-024B-8	80176	LE-029B-7	80200
EL-014B-4S	80057S	LE-018B-5S	80137S	LE-022A-15	80115S	LE-024B-8S	80176S	LE-029B-7S	80200S
EL-014B-5	80058	LE-018B-6	80138	LE-022A-2	80116	LE-024B-9	80177	LE-029B-8	80201
EL-014B-5S	80058S	LE-018B-6S	80138S	LE-022A-2S	80116S	LE-024B-9S	80177S	LE-029B-8S	80201S
EL-014B-6	ZZ1-26	LE-018B-7	80139	LE-022A-3	80117	LE-026B-0	80187	LE-029B-9	80202
EL-014B-6S	80059S	LE-018B-7S	80139S	LE-022A-3S	80117S	LE-026B-00	80186	LE-029B-9S	80202S
EL-014B-7	ZZ3-28	LE-018B-8	80140	LE-022A-4	80118	LE-026B-001	80185	LE-029C-0	80203
EL-014B-7S	80060S	LE-018B-8S	80140S	LE-022A-4S	80118S	LE-026B-001S	80185S	LE-029C-00	80203S
LE-014A-1	80068	LE-018B-9	80141	LE-022A-5	80119	LE-026B-002	80184	LE-029C-001	80204
LE-014A-10	80075	LE-018B-9S	80141S	LE-022A-5S	80119S	LE-026B-002S	80184S	LE-029C-001S	80204S
LE-014A-10S	80075S	LE-018C-1	80236	LE-022A-6	80120	LE-026B-005	80186S	LE-029C-005	80208S
LE-014A-11	80076	LE-018C-10	80245	LE-022A-6S	80120S	LE-026B-05	80187S	LE-029C-05	80208S
LE-014A-11S	80076S	LE-018C-10S	80245S	LE-022A-7	80121	LE-026B-1	80188	LE-029C-1	80208
LE-014A-12	80077	LE-018C-11	80246	LE-022A-7S	80121S	LE-026B-1S	80188S	LE-029C-10	80209S
LE-014A-12S	80077S	LE-018C-11S	80246S	LE-022A-8	80122	LE-026B-2	80189	LE-029C-10S	80209S
LE-014A-13	80068S	LE-018C-12	80247	LE-022A-8S	80122S	LE-026B-2S	80189S	LE-029C-11	80209
LE-014A-3	80069	LE-018C-12S	80247S	LE-022A-9	80123	LE-026B-3	80190	LE-029C-11S	80209S
LE-014A-3S	80069S	LE-018C-13	80248	LE-022A-9S	80123S	LE-026B-3S	80190S	LE-029C-15	80208S
LE-014A-4	80070	LE-018C-13S	80248S	LE-022B-0	80162	LE-026B-4	80191	LE-029C-2	80208
LE-014A-4S	80070S	LE-018C-1S	80236S	LE-022B-00	80161	LE-026B-4S	80191S	LE-029C-2S	80208S
LE-014A-5	80071	LE-018C-2	80237	LE-022B-01S	80160S	LE-026B-5	80192	LE-029C-3	80208
LE-014A-5S	80071S	LE-018C-2S	80237S	LE-022B-01S	80160S	LE-026B-5S	80192S	LE-029C-3S	80208S
LE-014A-6	80072	LE-018C-3	80238	LE-022B-02	80169	LE-026B-6	80193	LE-029C-4	80208
LE-014A-6S	80072S	LE-018C-3S	80238S	LE-022B-02S	80159S	LE-026B-6S	80193S	LE-029C-4S	80208S
LE-014A-8	80073	LE-018C-4	80239	LE-022B-00S	80161S	LE-026B-7	80194	LE-029C-5	80208
LE-014A-8S	80073S	LE-018C-4S	80239S	LE-022B-05S	80162S	LE-026B-7S	80194S	LE-029C-5S	80208S
LE-014A-9	80074	LE-018C-5	80240	LE-022B-1	80163	LE-026B-8	80195	LE-029C-6	80208
LE-014A-9S	80074S	LE-018C-5S	80240S	LE-022B-1S	80163S	LE-026B-8S	80195S	LE-029C-6S	80208S
LE-016A-0	80082	LE-018C-6	80241	LE-022B-2	80164	LE-026B-9	80196	LE-029C-7	80209
LE-016A-00	80081	LE-018C-6S	80241S	LE-022B-2S	80164S	LE-026B-9S	80196S	LE-029C-7S	80209S
LE-016A-001	80080	LE-018C-7	80242	LE-022B-3	80165	LE-026C-0	80265	LE-029C-8	80209
LE-016A-001S	80080S	LE-018C-7S	80242S	LE-022B-3S	80165S	LE-026C-00	80264	LE-029C-8S	80209S
LE-016A-002	80079	LE-018C-8	80243	LE-022B-4	80166	LE-026C-001	80263	LE-029C-9	80209
LE-016A-002S	80079S	LE-018C-8S	80243S	LE-022B-4S	80166S	LE-026C-001S	80263S	LE-029C-9S	80209S
LE-016A-005	80081S	LE-018C-9	80244	LE-022B-5	80167	LE-026C-002	80262	LE-030CD-1	80372
LE-016A-005S	80081S	LE-018C-9S	80244S	LE-022B-5S	80167S	LE-026C-002S	80262S	LE-030CD-1S	80372S
LE-016A-1	80083	LE-020A-0	80106	LE-022B-6	80168	LE-026C-005	80264S	LE-030CD-2	80373
LE-016A-1S	80083S	LE-020A-00	80105	LE-022B-6S	80168S	LE-026C-05	80265S	LE-030CD-2S	80373S
LE-016A-2	80084	LE-020A-001	80104	LE-022B-7	80169	LE-026C-1	80266	LE-030CD-3	80374
LE-016A-2S	80084S	LE-020A-001S	80104S	LE-022B-7S	80169S	LE-026C-10	80275	LE-030CD-3S	80374S
LE-016A-3	80085	LE-020A-002	80103	LE-022B-8	80170	LE-026C-10S	80275S	LE-030CD-4	80375
LE-016A-3S	80085S	LE-020A-002S	80103S	LE-022B-8S	80170S	LE-026C-11	80276	LE-030CD-4S	80375S
LE-016A-4	80086	LE-020A-003	80105S	LE-022B-9	80171	LE-026C-11S	80276S	LE-030CD-5	80376
LE-016A-4S	80086S	LE-020A-005	80106S	LE-022B-9S	80171S	LE-026C-15	80266S	LE-030CD-5S	80376S
LE-016A-5	80087	LE-020A-1	80107	LE-022C-1	80249	LE-026C-2	80267	LE-030CD-6	80377
LE-016A-5S	80087S	LE-020A-1S	80107S	LE-022C-10	80258	LE-026C-2S	80267S	LE-030CD-6S	80377S
LE-016A-6	80088	LE-020A-2	80108	LE-022C-10S	80258S	LE-026C-3	80268	LE-030CD-7	80378
LE-016A-6S	80088S	LE-020A-2S	80108S	LE-022C-11	80259	LE-026C-3S	80268S	LE-030CD-7S	80378S
LE-016A-7	80089	LE-020A-3	80109	LE-022C-11S	80259S	LE-026C-4	80269	LE-030CD-8	80379

Lee Spring / Century Spring Part Numbers



Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
LE-031B-00	80211	LE-034B-2S	80224S	LE-037C-5S	80342S	LE-039D-10	80497	LE-043CD-10	80413
LE-031B-001	80210	LE-034B-3	80225	LE-037C-6	80343	LE-039D-10S	80497S	LE-043CD-10S	80413S
LE-031B-001S	80210S	LE-034B-3S	80225S	LE-037C-6S	80343S	LE-039D-11	80498	LE-043CD-11	80414
LE-031B-002	80209	LE-034B-4	80226	LE-037C-7	80344	LE-039D-11S	80498S	LE-043CD-11S	80414S
LE-031B-002S	80209S	LE-034B-4S	80226S	LE-037C-7S	80344S	LE-039D-1S	80488S	LE-043CD-1S	80404S
LE-031B-003	80211	LE-034B-5	80227	LE-037C-8	80345	LE-039D-2	80489	LE-043CD-2	80405
LE-031B-005	80212S	LE-034B-5S	80227S	LE-037C-8S	80345S	LE-039D-2S	80489S	LE-043CD-2S	80405S
LE-031B-1	80213	LE-034B-6	80228	LE-037C-9	80346	LE-039D-3	80490	LE-043CD-3	80406
LE-031B-10	80222	LE-034B-6S	80228S	LE-037C-9S	80346S	LE-039D-3S	80490S	LE-043CD-3S	80406S
LE-031B-10S	80222S	LE-034B-7	80229	LE-037C-1	80393	LE-039D-4	80491	LE-043CD-4	80407
LE-031B-1S	80213S	LE-034B-7S	80229S	LE-037CD-10	80402	LE-039D-4S	80491S	LE-043CD-4S	80407S
LE-031B-2	80214	LE-034B-8	80230	LE-037CD-10S	80402S	LE-039D-5	80492	LE-043CD-5	80408
LE-031B-2S	80214S	LE-034B-8S	80230S	LE-037CD-11	80403	LE-039D-5S	80492S	LE-043CD-5S	80408S
LE-031B-3	80215	LE-034B-9	80231	LE-037CD-11S	80403S	LE-039D-6	80493	LE-043CD-6	80409
LE-031B-3S	80215S	LE-034B-9S	80231S	LE-037CD-15	80393S	LE-039D-6S	80493S	LE-043CD-6S	80409S
LE-031B-4	80216	LE-034C-0	80319	LE-037CD-2	80394	LE-039D-7	80494	LE-043CD-7	80410
LE-031B-4S	80216S	LE-034C-00	80318	LE-037CD-2S	80394S	LE-039D-7S	80494S	LE-043CD-7S	80410S
LE-031B-5	80217	LE-034C-001	80317	LE-037CD-3	80395	LE-039D-8	80495	LE-043CD-8	80411
LE-031B-5S	80217S	LE-034C-001S	80317S	LE-037CD-3S	80395S	LE-039D-8S	80495S	LE-043CD-8S	80411S
LE-031B-6	80218	LE-034C-005	80318S	LE-037CD-4	80396	LE-039D-9	80496	LE-043CD-9	80412
LE-031B-6S	80218S	LE-034C-0S	80319S	LE-037CD-4S	80396S	LE-039D-9S	80496S	LE-043CD-9S	80412S
LE-031B-7	80219	LE-034C-1	80320	LE-037CD-5	80397	LE-041C-1	80355	LE-045D-0	80515
LE-031B-7S	80219S	LE-034C-10	80329	LE-037CD-5S	80397S	LE-041C-10	80365	LE-045D-0S	80515S
LE-031B-8	80220	LE-034C-10S	80329S	LE-037CD-6	80398	LE-041C-10S	80365S	LE-045D-1	80516
LE-031B-8S	80220S	LE-034C-11	80330	LE-037CD-6S	80398S	LE-041C-11	80366	LE-045D-10	80525
LE-031B-9	80221	LE-034C-11S	80330S	LE-037CD-7	80399	LE-041C-11S	80366S	LE-045D-10S	80525S
LE-031B-9S	80221S	LE-034C-1S	80320S	LE-037CD-7S	80399S	LE-041C-12	80367	LE-045D-11	80526
LE-031C-0	80301	LE-034C-2	80321	LE-037CD-8	80400	LE-041C-12S	80367S	LE-045D-11S	80526S
LE-031C-00	80300	LE-034C-2S	80321S	LE-037CD-8S	80400S	LE-041C-13	80368	LE-045D-12	80527
LE-031C-001	80299	LE-034C-3	80322	LE-037CD-9	80401	LE-041C-13S	80368S	LE-045D-12S	80527S
LE-031C-001S	80299S	LE-034C-3S	80322S	LE-037CD-9S	80401S	LE-041C-1S	80355S	LE-045D-13	80528
LE-031C-005	80300S	LE-034C-4	80323	LE-037D-0	80472	LE-041C-2	80357	LE-045D-13S	80528S
LE-031C-0S	80301S	LE-034C-4S	80323S	LE-037D-0S	80472S	LE-041C-2S	80357S	LE-045D-14	80529
LE-031C-1	80302	LE-034C-5	80324	LE-037D-1	80473	LE-041C-3	80358	LE-045D-14S	80529S
LE-031C-10	80311	LE-034C-5S	80324S	LE-037D-10	80482	LE-041C-3S	80358S	LE-045D-1S	80516S
LE-031C-10S	80311S	LE-034C-6	80325	LE-037D-10S	80482S	LE-041C-4	80359	LE-045D-2	80517
LE-031C-11	80312	LE-034C-6S	80325S	LE-037D-11	80483	LE-041C-4S	80359S	LE-045D-2S	80517S
LE-031C-11S	80312S	LE-034C-7	80326	LE-037D-11S	80483S	LE-041C-5	80360	LE-045D-3	80518
LE-031C-15	80302S	LE-034C-7S	80326S	LE-037D-1S	80473S	LE-041C-5S	80360S	LE-045D-3S	80518S
LE-031C-2	80303	LE-034C-8	80327	LE-037D-2	80474	LE-041C-6	80361	LE-045D-4	80519
LE-031C-2S	80303S	LE-034C-8S	80327S	LE-037D-2S	80474S	LE-041C-6S	80361S	LE-045D-4S	80519S
LE-031C-3	80304	LE-034C-9	80328	LE-037D-3	80475	LE-041C-7	80362	LE-045D-5	80520
LE-031C-3S	80304S	LE-034C-9S	80328S	LE-037D-3S	80475S	LE-041C-7S	80362S	LE-045D-5S	80520S
LE-031C-4	80305	LE-034D-1	80457	LE-037D-4	80476	LE-041C-8	80363	LE-045D-6	80521
LE-031C-4S	80305S	LE-034D-1S	80457S	LE-037D-4S	80476S	LE-041C-8S	80363S	LE-045D-6S	80521S
LE-031C-5	80306	LE-034D-2	80458	LE-037D-5	80477	LE-041C-9	80364	LE-045D-7	80522
LE-031C-5S	80306S	LE-034D-2S	80458S	LE-037D-5S	80477S	LE-041C-9S	80364S	LE-045D-7S	80522S
LE-031C-6	80307	LE-034D-3	80459	LE-037D-6	80478	LE-041D-0	80499	LE-045D-8	80523
LE-031C-6S	80307S	LE-034D-3S	80459S	LE-037D-6S	80478S	LE-041D-0S	80499S	LE-045D-8S	80523S
LE-031C-7	80308	LE-034D-4	80460	LE-037D-7	80479	LE-041D-1	80500	LE-045D-9	80524
LE-031C-7S	80308S	LE-034D-4S	80460S	LE-037D-7S	80479S	LE-041D-10	80509	LE-045D-9S	80524S
LE-031C-8	80309	LE-034D-5	80461	LE-037D-8	80480	LE-041D-10S	80509S	LE-045E-0	80672
LE-031C-8S	80309S	LE-034D-5S	80461S	LE-037D-8S	80480S	LE-041D-11	80510	LE-045E-00	80671
LE-031C-9	80310	LE-034D-6	80462	LE-037D-9	80481	LE-041D-11S	80510S	LE-045E-00S	80671S
LE-031C-9S	80310S	LE-034D-6S	80462S	LE-037D-9S	80481S	LE-041D-12	80511	LE-045E-0S	80672S
LE-031D-0	80445	LE-034D-7	80463	LE-037DE-1	80595	LE-041D-12S	80511S	LE-045E-1	80673
LE-031D-0S	80445S	LE-034D-7S	80463S	LE-037DE-10	80604	LE-041D-1S	80500S	LE-045E-1S	80613
LE-031D-1	80446	LE-034E-1	80639	LE-037DE-10S	80604S	LE-041D-2	80501	LE-045E-2	80674
LE-031D-10	80455	LE-034E-1S	80639S	LE-037DE-11	80605	LE-041D-2S	80501S	LE-045E-2S	80674S
LE-031D-10S	80455S	LE-034E-2	80640	LE-037DE-11S	80605S	LE-041D-3	80502	LE-045E-3	80675
LE-031D-11	80456	LE-034E-2S	80640S	LE-037DE-1S	80595S	LE-041D-3S	80502S	LE-045E-3S	80675S
LE-031D-11S	80456S	LE-034E-3	80641	LE-037DE-2	80596	LE-041D-4	80503	LE-045E-4	80676
LE-031D-15	80446S	LE-034E-3S	80641S	LE-037DE-2S	80596S	LE-041D-4S	80503S	LE-045E-4S	80676S
LE-031D-2	80447	LE-034E-4	80642	LE-037DE-3	80597	LE-041D-5	80504	LE-045E-5	80677
LE-031D-2S	80447S	LE-034E-4S	80642S	LE-037DE-3S	80597S	LE-041D-5S	80504S	LE-045E-5S	80677S
LE-031D-3	80448	LE-034E-5	80643	LE-037DE-4	80598	LE-041D-6	80505	LE-045E-6	80678
LE-031D-3S	80448S	LE-034E-5S	80643S	LE-037DE-4S	80598S	LE-041D-6S	80505S	LE-045E-6S	80678S
LE-031D-4	80449	LE-034E-6	80644	LE-037DE-5	80599	LE-041D-7	80506	LE-045E-7	80679
LE-031D-4S	80449S	LE-034E-6S	80644S	LE-037DE-5S	80599S	LE-041D-7S	80506S	LE-045E-7S	80679S
LE-031D-5	80450	LE-037C-0	80336	LE-037DE-6	80600	LE-041D-8	80507	LE-045E-8	80680
LE-031D-5S	80450S	LE-037C-00	80335	LE-037DE-6S	80600S	LE-041D-8S	80507S	LE-045E-8S	80680S
LE-031D-6	80451	LE-037C-00S	80335S	LE-037DE-7	80601	LE-041D-9	80508	LE-046DE-1	80617
LE-031D-6S	80451S	LE-037C-0S	80336S	LE-037DE-7S	80601S	LE-041D-9S	80508S	LE-046DE-10	80626
LE-031D-7	80452	LE-037C-1	80338	LE-037DE-8	80602	LE-041E-1	80658	LE-046DE-10S	80626S
LE-031D-7S	80452S	LE-037C-10	80347	LE-037DE-8S	80602S	LE-041E-1S	80658S	LE-046DE-11	80627
LE-031D-8	80453	LE-037C-10S	80347S	LE-037DE-9	80603	LE-041E-2	80659	LE-046DE-11S	80627S
LE-031D-8S	80453S	LE-037C-11	80348	LE-037DE-9S	80603S	LE-041E-2S	80659S	LE-046DE-1S	80617S
LE-031D-9	80454	LE-037C-11S	80348S	LE-037E-1	80645	LE-041E-3	80660	LE-046DE-2	80618
LE-031D-9S	80454S	LE-037C-12	80349	LE-037E-1S	80645S	LE-041E-3S	80660S	LE-046DE-2S	80618S
LE-034B-1	80223	LE-037C-12S	80349S	LE-037E-2	80646	LE-041E-4	80661	LE-046DE-3	80619
LE-034B-10	80232	LE-037C-13	80350	LE-037E-2S	80608	LE-041E-4S	80661S	LE-046DE-3S	80619S
LE-034B-10S	80232S	LE-037C-13S	80350S	LE-037E-3	80647	LE-041E-5	80662	LE-046DE-4	80620
LE-034B-11	80233	LE-037C-1S	80338S	LE-037E-3S	80609	LE-041E-5S	80662S	LE-046DE-4S	80620S
LE-034B-11S	80233S	LE-037C-2	80339	LE-037E-4	80648	LE-041E-6	80663	LE-046DE-5	80621
LE-034B-12	80234	LE-037C-2S	80339S	LE-037E-4S	80648S	LE-041E-6S	80663S	LE-046DE-5S	80621S
LE-034B-12S	80234S	LE-037C-3	80340	LE-037E-5	80649	LE-041E-7	80664	LE-046DE-6	80622
LE-034B-13	80235	LE-037C-3S	80340S	LE-037E-5S	80649S				

Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
LE-046DE-8S	80624S	LE-052D-10	80559	LE-055DE-6S	80633S	LE-058D-8S	80585S	LE-067E-12	80735
LE-046DE-9	80625	LE-052D-10S	80559S	LE-055DE-7	80634	LE-058D-9	80586	LE-067E-12S	80735S
LE-046DE-9S	80625S	LE-052D-11	80560	LE-055DE-7S	80634S	LE-058D-9S	80586S	LE-067E-1S	80724S
LE-049CD-1	80415	LE-052D-11S	80560S	LE-055DE-8	80635	LE-063E-0	80711	LE-067E-2	80725
LE-049CD-10	80424	LE-052D-1S	80550S	LE-055DE-8S	80635S	LE-063E-0S	80711S	LE-067E-2S	80725S
LE-049CD-10S	80424S	LE-052D-2	80551	LE-055DE-9	80636	LE-063E-1	80712	LE-067E-3	80726
LE-049CD-11	80425	LE-052D-2S	80551S	LE-055DE-9S	80636S	LE-063E-10	80721	LE-067E-3S	80726S
LE-049CD-11S	80425S	LE-052D-3	80552	LE-055E-0	80698	LE-063E-10S	80721S	LE-067E-4	80727
LE-049CD-1S	80415S	LE-052D-3S	80552S	LE-055E-0S	80698S	LE-063E-11	80722	LE-067E-4S	80727S
LE-049CD-2	80416	LE-052D-4	80553	LE-055E-1	80699	LE-063E-11S	80722S	LE-067E-5	80728
LE-049CD-2S	80416S	LE-052D-4S	80553S	LE-055E-10	80708	LE-063E-12	80723	LE-067E-5S	80728S
LE-049CD-3	80417	LE-052D-5	80554	LE-055E-10S	80708S	LE-063E-12S	80723S	LE-067E-6	80729
LE-049CD-3S	80417S	LE-052D-5S	80554S	LE-055E-11	80709	LE-063E-1S	80712S	LE-067E-6S	80729S
LE-049CD-4	80418	LE-052D-6	80555	LE-055E-11S	80709S	LE-063E-2	80713	LE-067E-7	80730
LE-049CD-4S	80418S	LE-052D-6S	80555S	LE-055E-12	80710	LE-063E-2S	80713S	LE-067E-7S	80730S
LE-049CD-5	80419	LE-052D-7	80556	LE-055E-12S	80710S	LE-063E-3	80714	LE-067E-8	80731
LE-049CD-5S	80419S	LE-052D-7S	80556S	LE-055E-1S	80699S	LE-063E-3S	80714S	LE-067E-8S	80731S
LE-049CD-6	80420	LE-052D-8	80557	LE-055E-2	80700	LE-063E-4	80715	LE-067E-9	80732
LE-049CD-6S	80420S	LE-052D-8S	80557S	LE-055E-2S	80700S	LE-063E-4S	80715S	LE-067E-9S	80732S
LE-049CD-7	80421	LE-052D-9	80558	LE-055E-3	80701	LE-063E-5	80716	LE-069F-1	80784
LE-049CD-7S	80421S	LE-052D-9S	80558S	LE-055E-3S	80701S	LE-063E-5S	80716S	LE-069F-1S	80784S
LE-049CD-8	80422	LE-055CD-1	80426	LE-055E-4	80702	LE-063E-6	80717	LE-069F-2	80785
LE-049CD-8S	80422S	LE-055CD-10	80435	LE-055E-4S	80702S	LE-063E-6S	80717S	LE-069F-2S	80785S
LE-049CD-9	80423	LE-055CD-10S	80435S	LE-055E-5	80703	LE-063E-7	80718	LE-069F-3	80786
LE-049CD-9S	80423S	LE-055CD-11	80436	LE-055E-5S	8018	LE-063E-7S	80718S	LE-069F-3S	80786S
LE-049D-1	80533	LE-055CD-11S	80436S	LE-055E-6	80704	LE-063E-8	80719	LE-069F-4	80787
LE-049D-11	80543	LE-055CD-1S	80426S	LE-055E-6S	80704S	LE-063E-8S	80719S	LE-069F-4S	80787S
LE-049D-11S	80543S	LE-055CD-2	80427	LE-055E-7	80705	LE-063E-9	80720	LE-069F-5	80788
LE-049D-12	80544	LE-055CD-2S	80427S	LE-055E-7S	6020	LE-063E-9S	80720S	LE-069F-5S	80788S
LE-049D-12S	80544S	LE-055CD-3	80428	LE-055E-8	80706	LE-063F-1	80774	LE-069F-6	80789
LE-049D-13	80545	LE-055CD-3S	80428S	LE-055E-8S	80706S	LE-063F-1S	80774S	LE-069F-6S	80789S
LE-049D-13S	80545S	LE-055CD-4	80429	LE-055E-9	80707	LE-063F-2	80775	LE-069F-7	80790
LE-049D-14	80546	LE-055CD-4S	80429S	LE-055E-9S	6021	LE-063F-2S	80775S	LE-069F-7S	80790S
LE-049D-14S	80546S	LE-055CD-5	80430	LE-055F-0	80764	LE-063F-3	80776	LE-069F-8	80791
LE-049D-15	80547	LE-055CD-5S	80430S	LE-055F-00	80763	LE-063F-3S	80776S	LE-069F-8S	80791S
LE-049D-15S	80547S	LE-055CD-6	80431	LE-055F-00S	80763S	LE-063F-4	80777	LE-069F-9	80792
LE-049D-1S	80533S	LE-055CD-6S	80431S	LE-055F-0S	80764S	LE-063F-4S	80777S	LE-069F-9S	80792S
LE-049D-2	80534	LE-055CD-7	80432	LE-055F-1	80765	LE-063F-5	80778	LE-069G-1	80846
LE-049D-2S	80534S	LE-055CD-7S	80432S	LE-055F-1S	80765S	LE-063F-5S	80778S	LE-069G-10	80855
LE-049D-3	80535	LE-055CD-8	80433	LE-055F-2	80766	LE-063F-6	80779	LE-069G-10S	80855S
LE-049D-3S	80535S	LE-055CD-8S	80433S	LE-055F-2S	80766S	LE-063F-6S	80779S	LE-069G-15	80846S
LE-049D-4	80536	LE-055CD-9	80434	LE-055F-3	80767	LE-063F-7	80780	LE-069G-2	80847
LE-049D-4S	80536S	LE-055CD-9S	80434S	LE-055F-3S	80767S	LE-063F-7S	80780S	LE-069G-2S	80847S
LE-049D-5	80537	LE-055D-0	80561	LE-055F-4	80768	LE-063F-8	80781	LE-069G-3	80848
LE-049D-5S	80537S	LE-055D-0S	80561S	LE-055F-4S	80768S	LE-063F-8S	80781S	LE-069G-3S	80848S
LE-049D-6	80538	LE-055D-1	80563	LE-055F-5	80769	LE-063F-9	80782	LE-069G-4	80849
LE-049D-6S	80538S	LE-055D-10	80572	LE-055F-5S	80769S	LE-063F-9S	80782S	LE-069G-4S	80849S
LE-049D-7	80539	LE-055D-10S	80572S	LE-055F-6	80770	LE-063G-1	80836	LE-069G-5	80850
LE-049D-7S	80539S	LE-055D-11	80573	LE-055F-6S	80770S	LE-063G-10	80845	LE-069G-5S	80850S
LE-049D-8	80540	LE-055D-11S	80573S	LE-055F-7	80771	LE-063G-10S	80845S	LE-069G-6	80851
LE-049D-8S	80540S	LE-055D-12	80574	LE-055F-7S	80771S	LE-063G-1S	6027	LE-069G-6S	80851S
LE-049D-9	80541	LE-055D-12S	80574S	LE-055F-1	80830	LE-063G-2	80837	LE-069G-7	80852
LE-049D-9S	80541S	LE-055D-13	80575	LE-055F-1S	80830S	LE-063G-2S	80837S	LE-069G-7S	80852S
LE-049D-10	80542	LE-055D-13S	80575S	LE-055G-2	80831	LE-063G-3	80838	LE-069G-8	80853
LE-049D-10S	80542S	LE-055D-14	80576	LE-055G-2S	80831S	LE-063G-3S	80838S	LE-069G-8S	80853S
LE-049E-1	80685	LE-055D-14S	80576S	LE-055G-3	80832	LE-063G-4	80839	LE-069G-9	80854
LE-049E-10	80695	LE-055D-15	80577	LE-055G-3S	80832S	LE-063G-4S	80839S	LE-069G-9S	80854S
LE-049E-10S	80695S	LE-055D-15S	80577S	LE-055G-4	80833	LE-063G-5	80840	LE-069G-10	80865
LE-049E-1S	80685S	LE-055D-1S	80563	LE-055G-4S	80833S	LE-063G-5S	80840S	LE-075G-10	80865
LE-049E-2	80687	LE-055D-2	80564	LE-055G-5	80834	LE-063G-6	80841	LE-075G-10S	80865S
LE-049E-2S	80687S	LE-055D-2S	80564S	LE-055G-5S	80834S	LE-063G-6S	80841S	LE-075G-11	80866
LE-049E-3	80688	LE-055D-3	80565	LE-055G-6	80835	LE-063G-7	80842	LE-075G-11S	80866S
LE-049E-3S	80688S	LE-055D-3S	80565S	LE-055G-6S	6061	LE-063G-7S	80842S	LE-075G-1S	80856S
LE-049E-4	80689	LE-055D-4	80566	LE-055H-1	80925	LE-063G-8	80843	LE-075G-2	80857
LE-049E-4S	80689S	LE-055D-4S	6000	LE-055H-1S	80925S	LE-063G-8S	80843S	LE-075G-2S	80857S
LE-049E-5	80690	LE-055D-5	80567	LE-055H-2	80926	LE-063G-9	80844	LE-075G-3	80858
LE-049E-5S	80690S	LE-055D-5S	80567S	LE-055H-2S	80926S	LE-063G-9S	80844S	LE-075G-3S	80858S
LE-049E-6	80691	LE-055D-6	80568	LE-055H-3	80927	LE-063H-1	80929	LE-075G-4	80859
LE-049E-6S	80691S	LE-055D-6S	80568S	LE-055H-3S	80927S	LE-063H-1S	80929S	LE-075G-4S	80860
LE-049E-7	80692	LE-055D-7	80569	LE-055H-4	80928	LE-063H-2	80930	LE-075G-5	80860
LE-049E-7S	80692S	LE-055D-7S	80569S	LE-055H-4S	80928S	LE-063H-2S	80930S	LE-075G-5S	80860S
LE-049E-8	80693	LE-055D-8	80570	LE-055H-5	80928	LE-063H-3	80931	LE-075G-6	80861
LE-049E-8S	80693S	LE-055D-8S	80570S	LE-055H-5S	80928S	LE-063H-3S	80931S	LE-075G-6S	80862
LE-049E-9	80694	LE-055D-9	80571	LE-055H-10S	80927S	LE-063H-4	80932	LE-075G-7	80862
LE-049E-9S	80694S	LE-055D-9S	80571S	LE-058D-11	80588	LE-063H-4S	80932S	LE-075G-7S	80863
LE-049G-1	80823	LE-055DE-1	80628	LE-058D-11S	80588S	LE-063H-5	80933	LE-075G-8	80863
LE-049G-1S	80823S	LE-055DE-10	80637	LE-058D-18	80578S	LE-063H-5S	80933S	LE-075G-8S	80863S
LE-049G-2	80824	LE-055DE-10S	80637S	LE-058D-2	80579	LE-063J-1	80956	LE-075G-9	80864
LE-049G-2S	80824S	LE-055DE-11	80638	LE-058D-2S	80579S	LE-063J-1S	80956S	LE-075G-9S	80864S
LE-049G-3	80825	LE-055DE-11S	80638S	LE-058D-3	80580	LE-063J-2	80957	LE-075H-1	80943
LE-049G-3S	80825S	LE-055DE-1S	80628S	LE-058D-3S	80580S	LE-063J-2S	80957S	LE-075H-1S	80943S
LE-049G-4	80826	LE-055DE-2	80629	LE-058D-4	80581	LE-063J-3	80958	LE-075H-2	80935
LE-049G-4S	80826S	LE-055DE-2S	80629S	LE-058D-4S	80581S	LE-063J-3S	80958S	LE-075H-2S	80935S
LE-049G-5	80827	LE-055DE-3	80630	LE-058D-5	80582	LE-063J-4	80959	LE-075H-3	80936
LE-049G-5S	80827S	LE-055DE-3S	80630S	LE-058D-5S	80582S	LE-063J-4S	80959S	LE-075H-3S	80936S
LE-049G-6	80828	LE-055DE-4	80631	LE-058D-6	80583	LE-067E-1	80724	LE-075H-4	80937
LE-049G-6S	80828S	LE-055DE-4S	80631S	LE-058D-6S	80583S	LE-067E-10</td			

Lee Spring / Century Spring Part Numbers



Lee Spring/Century Spring Part Numbers


Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
LE-075H-6S	80939S	LE-085JK-8S	81087S	LE-105J-8S	80996S	LE-115K-5S	81112S	316 Extension Springs	
LE-075H-7	80940	LE-085JK-9	81088	LE-105JK-1	81099	LE-115K-6	81113	EI 007A 01	90000S
LE-075H-7S	80940S	LE-085JK-9S	81088S	LE-105JK-1S	81099S	LE-115K-6S	81113S	EI 007A 02	90001S
LE-075H-8	80941	LE-093G-1	80876	LE-105JK-2	81100	LE-115K-7	81114	EI 007A 03	90002S
LE-075H-8S	80941S	LE-093G-1S	80876S	LE-105JK-2S	81100S	LE-115K-7S	81114S	EI 007A 04	90003S
LE-075H-9	80942	LE-093G-2	80877	LE-105JK-3	81101	LE-115K-8	81115	EI 007A 05	90004S
LE-075H-9S	80942S	LE-093G-2S	80877S	LE-105JK-3S	81101S	LE-115K-8S	81115S	EI 007AA 01	90028S
LE-075J-1	80961	LE-093G-3	80878	LE-105JK-4	81102	LE-115K-9	81116	EI 007AA 02	90029S
LE-075J-1S	6045	LE-093G-3S	80878S	LE-105JK-4S	81102S	LE-115K-9S	81116S	EI 007AA 03	90030S
LE-075J-2	80962	LE-093G-4	80879	LE-105JK-5	81103	LE-125L-1	81138	EI 007AA 04	90031S
LE-075J-2S	80962S	LE-093G-4S	80879S	LE-105JK-5S	81103S	LE-125L-1S	81138S	EI 007AA 05	90032S
LE-075J-3	80963	LE-093G-5	80880	LE-105JK-6	81104	LE-125L-2	81139	EI 008A 01	90005S
LE-075J-3S	80963S	LE-093G-5S	80880S	LE-105JK-6S	81104S	LE-125L-2S	81139S	EI 008A 02	90006S
LE-075J-4	80964	LE-093G-6	80881	LE-105JK-7	81105	LE-125L-3	81140	EI 008A 03	90007S
LE-075J-4S	80964S	LE-093G-6S	80881S	LE-105JK-7S	81105S	LE-125L-3S	81140S	EI 008A 04	90008S
LE-075J-5	80965	LE-093G-7	80882	LE-105JK-8	81106	LE-125L-4	81141	EI 008A 05	90009S
LE-075J-5S	80965S	LE-093G-7S	80882S	LE-105JK-8S	81106S	LE-125L-4S	81141S	EI 008A 06	90010S
LE-075J-6	80966	LE-093G-8	80883	LE-105JK-9	81107	LE-125L-5	81142	EI 008A 07	90011S
LE-075J-6S	80966S	LE-093G-8S	80883S	LE-105JK-9S	81107S	LE-125L-5S	81142S	EI 008A 08	90012S
LE-075J-7	80967	LE-093G-9	80884	LE-115J-1	81002	LE-125L-6	81143	EI 008AA 01	90033S
LE-075J-7S	80967S	LE-093G-9S	80884S	LE-115J-1S	81002S	LE-125L-6S	81143S	EI 008AA 02	90034S
LE-085G-1	80867	LE-095J-1	80976	LE-115J-2	81003	LE-125L-7	81144	EI 008AA 03	90035S
LE-085G-1S	80867S	LE-095J-1S	80976S	LE-115J-2S	81003S	LE-125L-7S	81144S	EI 008AA 04	90036S
LE-085G-2	80868	LE-095J-2	80977	LE-115J-3	81004	LE-125L-8	81145	EI 008AA 05	90037S
LE-085G-2S	80868S	LE-095J-2S	80977S	LE-115J-3S	81004S	LE-125L-8S	81145S	EI 008AA 06	90010S
LE-085G-3	80869	LE-095J-3	80978	LE-115J-4	81005	LE-135K-1	81119	EI 008AA 07	90011S
LE-085G-3S	80869S	LE-095J-3S	80978S	LE-115J-4S	81005S	LE-135K-10	81128	EI 008AA 08	90012S
LE-085G-4	80870	LE-095J-4	80979	LE-115J-5	81006	LE-135K-10S	81128S	EI 008AA 09	90013S
LE-085G-4S	80870S	LE-095J-4S	S-646	LE-115J-5S	81006S	LE-135K-1S	81119S	EI 009A 01	90014S
LE-085G-5	80871	LE-095J-5	80980	LE-115J-6	81007	LE-135K-2	81118	EI 009A 02	90015S
LE-085G-5S	80871S	LE-095J-5S	80980S	LE-115J-6S	81007S	LE-135K-2S	81118S	EI 009A 03	90016S
LE-085G-6	80872	LE-095J-6	80981	LE-115J-7	81008	LE-135K-3	81121	EI 009A 04	90017S
LE-085G-6S	80872S	LE-095J-6S	6065	LE-115J-7S	81008S	LE-135K-3S	81121S	EI 009A 05	90018S
LE-085G-7	80873	LE-095J-7	80982	LE-115J-8	81009	LE-135K-4	81122	EI 009A 06	90019S
LE-085G-7S	80873S	LE-095J-7S	80982S	LE-115J-8S	81009S	LE-135K-4S	81122S	EI 009A 07	90020S
LE-085G-8	80874	LE-095J-8	80983	LE-115K-1	81008	LE-135K-5	81123	EI 009A 08	90021S
LE-085G-8S	80874S	LE-095J-8S	80983S	LE-115K-10	81017	LE-135K-5S	81123S	EI 009AA 01	90041S
LE-085G-9	80875	LE-095K-1	81089	LE-115K-10S	81017S	LE-135K-6	81124	EI 009AA 02	90042S
LE-085G-9S	80875S	LE-095K-10	81098	LE-115K-1S	81008S	LE-135K-6S	81124S	EI 009AA 03	90043S
LE-085H-0	80944	LE-095K-10S	81098S	LE-115K-2	81009	LE-135K-7	81125	EI 009AA 04	90044S
LE-085H-0S	80944S	LE-095K-1S	81089S	LE-115K-2S	81009S	LE-135K-7S	81125S	EI 009AA 05	90045S
LE-085H-1	80945	LE-095K-2	81090	LE-115K-3	81110	LE-135K-8	81126	EI 009AA 06	90046S
LE-085H-10	80954	LE-095K-2S	81090S	LE-115K-3S	81110S	LE-135K-8S	81126S	EI 009AA 07	90047S
LE-085H-10S	80954S	LE-095K-3	81091	LE-115K-4	81111	LE-135K-9	81127	EI 009AA 08	90048S
LE-085H-11	80955	LE-095K-3S	81091S	LE-115K-4S	81111S	LE-135K-9S	81127S	EI 010B 01	90057S
LE-085H-11S	80955S	LE-095K-4	81092	LE-115K-5	81112			EI 010B 02	90058S
LE-085H-15	80945S	LE-095K-4S	81092S						
LE-085H-2	80946	LE-095K-5	81093						
LE-085H-2S	80946S	LE-095K-5S	81093S						
LE-085H-3	80947	LE-095K-6	81094						
LE-085H-3S	80947S	LE-095K-6S	81094S						
LE-085H-4	80948	LE-095K-7	81095						
LE-085H-4S	80948S	LE-095K-7S	81095S						
LE-085H-5	80949	LE-095K-8	81096						
LE-085H-5S	80949S	LE-095K-8S	81096S						
LE-085H-6	80950	LE-095K-9	81097						
LE-085H-6S	80950S	LE-095K-9S	81097S						
LE-085H-7	80951	LE-095G-1	80896						
LE-085H-7S	80951S	LE-095G-1S	80896S						
LE-085H-8	80952	LE-095G-2	80897						
LE-085H-8S	80952S	LE-095G-2S	80897S						
LE-085H-9	80953	LE-095G-3	80898						
LE-085H-9S	80953S	LE-095G-3S	80898S						
LE-085H-10	80954	LE-095G-4	80899						
LE-085H-10S	80954S	LE-095G-4S	80899S						
LE-085H-11	80955	LE-095G-5	81094						
LE-085H-11S	80955S	LE-095G-5S	81094S						
LE-085H-12	80956	LE-095G-6	81095						
LE-085H-12S	80956S	LE-095G-6S	81095S						
LE-085H-13	80957	LE-095G-7	81096						
LE-085H-13S	80957S	LE-095G-7S	81096S						
LE-085H-14	80958	LE-095G-8	81097						
LE-085H-14S	80958S	LE-095G-8S	81097S						
LE-085H-15	80959	LE-095G-9	81098						
LE-085H-15S	80959S	LE-095G-9S	81098S						
LE-085H-16	80960	LE-095G-10	81099						
LE-085H-16S	80960S	LE-095G-10S	81099S						
LE-085H-17	80961	LE-095G-11	81100						
LE-085H-17S	80961S	LE-095G-11S	81100S						
LE-085H-18	80962	LE-095G-12	81101						
LE-085H-18S	80962S	LE-095G-12S	81101S						
LE-085H-19	80963	LE-095G-13	81102						
LE-085H-19S	80963S	LE-095G-13S	81102S						
LE-085H-20	80964	LE-095G-14	81103						
LE-085H-20S	80964S	LE-095G-14S	81103S						
LE-085H-21	80965	LE-095G-15	81104						
LE-085H-21S	80965S	LE-095G-15S	81104S						
LE-085H-22	80966	LE-095G-16	81105						
LE-085H-22S	80966S	LE-095G-16S	81105S						
LE-085H-23	80967	LE-095G-17	81106						
LE-085H-23S	80967S	LE-095G-17S	81106S						
LE-085H-24	80968	LE-095G-18	81107						
LE-085H-24S	80968S	LE-095G-18S	81107S						
LE-085H-25	80969	LE-095G-19	81108						
LE-085H-25S	80969S	LE-095G-19S	81108S						
LE-085H-26	80970	LE-095G-20	81109						
LE-085H-26S	80970S	LE-095G-20S	81109S						
LE-085H-27	80971	LE-095G-21	81110						
LE-085H-27S	80971S	LE-095G-21S	81110S						
LE-085H-28	80972	LE-095G-22	81111						
LE-085H-28S	80972S	LE-095G-22S	81111S						
LE-085H-29	80973	LE-095G-23	81112						
LE-085H-29S	80973S	LE-095G-23S	81112S						
LE-085H-30	80974	LE-095G-24	81113						
LE-085H-30S	80974S	LE-095G-24S	81113S						
LE-085H-31	80975	LE-095G-25	81114						
LE-085H-31S	80975S	LE-095G-25S	81114S						
LE-085H-32	80976	LE-095G-26	81115						
LE-085H-32S	80976S	LE-095G-26S	81115S						
LE-085H-33	80977	LE-095G-27	81116						
LE-085H-33S	80977S	LE-095G-27S	81116S						
LE-085H-34	80978	LE-095G-28	81117						
LE-085H-									

Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
EL 010B 03	90059S	LE 014A 01	90134S	LE 018C 12	90345S	LE 026B 06	90288S	LE 034B 03	90323S
EL 010B 04	90060S	LE 014A 02	90135S	LE 018C 13	90346S	LE 026B 07	90289S	LE 034B 04	90324S
EL 010B 05	90061S	LE 014A 03	90136S	LE 020A 0	90174S	LE 026B 08	90290S	LE 034B 05	90325S
EL 010B 06	90062S	LE 014A 04	90137S	LE 020A 00	90173S	LE 026B 09	90291S	LE 034B 06	90326S
EL 010B 07	90063S	LE 014A 05	90138S	LE 020A 001	90172S	LE 026C 0	90363S	LE 034B 07	90327S
EL 010C 01	90099S	LE 014A 06	90139S	LE 020A 002	90171S	LE 026C 00	90362S	LE 034B 08	90328S
EL 010C 02	90100S	LE 014A 07	90140S	LE 020A 01	90175S	LE 026C 001	90361S	LE 034B 09	90329S
EL 010C 03	90101S	LE 014A 08	90141S	LE 020A 02	90176S	LE 026C 002	90360S	LE 034B 10	90330S
EL 010C 04	90102S	LE 014A 09	90142S	LE 020A 03	90177S	LE 026C 01	90364S	LE 034B 11	90331S
EL 010C 05	90103S	LE 014A 10	90143S	LE 020A 04	90178S	LE 026C 02	90365S	LE 034B 12	90332S
EL 010C 06	90104S	LE 014A 11	90144S	LE 020A 05	90179S	LE 026C 03	90366S	LE 034B 13	90333S
EL 010C 07	90105S	LE 014A 12	90145S	LE 020A 06	90180S	LE 026C 04	90367S	LE 034C 0	90417S
EL 011A 01	90021S	LE 014B 01	90195S	LE 020A 07	90181S	LE 026C 05	90368S	LE 034C 00	90416S
EL 011A 02	90022S	LE 014B 02	90197S	LE 020A 08	90182S	LE 026C 06	90369S	LE 034C 001	90415S
EL 011A 03	90023S	LE 014B 03	90198S	LE 020B 01	90237S	LE 026C 07	90370S	LE 034C 01	90418S
EL 011A 04	90024S	LE 014B 04	90199S	LE 020B 02	90239S	LE 026C 08	90371S	LE 034C 02	90419S
EL 011A 05	90025S	LE 014B 05	90200S	LE 020B 03	90240S	LE 026C 09	90372S	LE 034C 03	90420S
EL 011A 06	90026S	LE 014B 06	90201S	LE 020B 04	90241S	LE 026C 10	90373S	LE 034C 04	90421S
EL 011A 07	90027S	LE 014B 07	90202S	LE 020B 05	90242S	LE 026C 11	90374S	LE 034C 05	90422S
EL 011AA 01	90049S	LE 014B 08	90203S	LE 020B 06	90243S	LE 026C 12	90375S	LE 034C 06	90423S
EL 011AA 02	90050S	LE 014B 09	90204S	LE 020B 07	90244S	LE 026C 13	90376S	LE 034C 07	90424S
EL 011AA 03	90051S	LE 014B 10	90205S	LE 020B 08	90245S	LE 026C 14	90377S	LE 034C 08	90425S
EL 011AA 04	90052S	LE 014B 11	90206S	LE 020B 09	90246S	LE 026C 15	90378S	LE 034C 09	90426S
EL 011AA 05	90053S	LE 014B 12	90207S	LE 020B 10	90247S	LE 029B 01	90292S	LE 034C 10	90427S
EL 011AA 06	90054S	LE 014B 13	90208S	LE 020B 11	90248S	LE 029B 02	90293S	LE 034C 11	90428S
EL 011AA 07	90055S	LE 014B 1A	90196S	LE 020B 12	90249S	LE 029B 03	90294S	LE 034C 12	90429S
EL 011AA 08	90056S	LE 016A 0	90150S	LE 020B 13	90250S	LE 029B 04	90295S	LE 034C 13	90430S
EL 011B 01	90064S	LE 016A 00	90149S	LE 020B 1A	90238S	LE 029B 05	90296S	LE 034C 14	90431S
EL 011B 02	90065S	LE 016A 001	90148S	LE 022A 01	90183S	LE 029B 06	90297S	LE 034C 15	90432S
EL 011B 03	90066S	LE 016A 002	90147S	LE 022A 02	90184S	LE 029B 07	90298S	LE 037C 0	90434S
EL 011B 04	90067S	LE 016A 003	90146S	LE 022A 03	90185S	LE 029B 08	90299S	LE 037C 00	90433S
EL 011B 05	90068S	LE 016A 01	90151S	LE 022A 04	90186S	LE 029B 09	90300S	LE 037C 01	90435S
EL 011B 06	90069S	LE 016A 02	90152S	LE 022A 05	90187S	LE 029B 10	90301S	LE 037C 02	90436S
EL 011B 07	90070S	LE 016A 03	90153S	LE 022A 06	90188S	LE 029B 11	90302S	LE 037C 03	90437S
EL 011C 01	90106S	LE 016A 04	90154S	LE 022A 07	90189S	LE 029B 12	90303S	LE 037C 04	90438S
EL 011C 02	90107S	LE 016A 05	90155S	LE 022A 08	90190S	LE 029B 13	90304S	LE 037C 05	90439S
EL 011C 03	90108S	LE 016A 06	90156S	LE 022A 09	90191S	LE 029B 14	90305S	LE 037C 06	90440S
EL 011C 04	90109S	LE 016A 07	90157S	LE 022A 10	90192S	LE 029B 15	90306S	LE 037C 07	90441S
EL 011C 05	90110S	LE 016B 01	90209S	LE 022A 11	90193S	LE 029C 0	90381S	LE 037C 08	90442S
EL 011C 06	90111S	LE 016B 02	90211S	LE 022A 12	90194S	LE 029C 00	90380S	LE 037C 09	90443S
EL 011C 07	90112S	LE 016B 03	90212S	LE 022B 0	90254S	LE 029C 001	90379S	LE 037C 10	90444S
EL 012B 01	90071S	LE 016B 04	90213S	LE 022B 00	90253S	LE 029C 01	90382S	LE 037C 11	90445S
EL 012B 02	90072S	LE 016B 05	90214S	LE 022B 001	90252S	LE 029C 02	90383S	LE 037C 12	90446S
EL 012B 03	90073S	LE 016B 06	90215S	LE 022B 002	90251S	LE 029C 03	90384S	LE 037C 13	90447S
EL 012B 04	90074S	LE 016B 07	90216S	LE 022B 01	90255S	LE 029C 04	90385S	LE 037C 14	90448S
EL 012B 05	90075S	LE 016B 08	90217S	LE 022B 02	90256S	LE 029C 05	90386S	LE 037C 15	90449S
EL 012B 06	90076S	LE 016B 09	90218S	LE 022B 03	90257S	LE 029C 06	90387S	LE 037C 16	90450S
EL 012B 07	90077S	LE 016B 10	90219S	LE 022B 04	90258S	LE 029C 07	90388S	LE 041C 01	90451S
EL 012C 01	90113S	LE 016B 11	90220S	LE 022B 05	90259S	LE 029C 08	90389S	LE 041C 02	90452S
EL 012C 02	90114S	LE 016B 12	90221S	LE 022B 06	90260S	LE 029C 09	90390S	LE 041C 03	90453S
EL 012C 03	90115S	LE 016B 13	90222S	LE 022B 07	90261S	LE 029C 10	90391S	LE 041C 04	90454S
EL 012C 04	90116S	LE 016B 1A	90210S	LE 022B 08	90262S	LE 029C 11	90392S	LE 041C 05	90455S
EL 012C 05	90117S	LE 018A 0	90162S	LE 022B 09	90263S	LE 029C 12	90393S	LE 041C 06	90456S
EL 012C 06	90118S	LE 018A 00	90161S	LE 022C 01	90347S	LE 029C 13	90394S	LE 041C 07	90457S
EL 012C 07	90119S	LE 018A 001	90160S	LE 022C 02	90348S	LE 029C 14	90395S	LE 041C 08	90458S
EL 013B 01	90078S	LE 018A 002	90159S	LE 022C 03	90349S	LE 029C 15	90396S	LE 041C 09	90459S
EL 013B 02	90079S	LE 018A 003	90158S	LE 022C 04	90350S	LE 031B 0	90310S	LE 041C 10	90460S
EL 013B 03	90080S	LE 018A 01	90163S	LE 022C 05	90351S	LE 031B 00	90309S	LE 041C 11	90461S
EL 013B 04	90081S	LE 018A 02	90164S	LE 022C 06	90352S	LE 031B 001	90308S	LE 041C 12	90462S
EL 013B 05	90082S	LE 018A 03	90165S	LE 022C 07	90353S	LE 031B 002	90307S	LE 041C 13	90463S
EL 013B 06	90083S	LE 018A 04	90166S	LE 022C 08	90354S	LE 031B 01	90311S	LE 041C 14	90464S
EL 013B 07	90084S	LE 018A 05	90167S	LE 022C 09	90355S	LE 031B 02	90312S	LE 041C 15	90465S
EL 013C 01	90120S	LE 018A 06	90168S	LE 022C 10	90356S	LE 031B 03	90313S	LE 041C 16	90466S
EL 013C 02	90121S	LE 018A 07	90169S	LE 022C 11	90357S	LE 031B 04	90314S		
EL 013C 03	90122S	LE 018A 08	90170S	LE 022C 12	90358S	LE 031B 05	90315S		
EL 013C 04	90123S	LE 018B 01	90223S	LE 022C 13	90359S	LE 031B 06	90316S		
EL 013C 05	90124S	LE 018B 02	90225S	LE 024B 01	90264S	LE 031B 07	90317S		
EL 013C 06	90125S	LE 018B 03	90226S	LE 024B 02	90265S	LE 031B 08	90318S		
EL 013C 07	90126S	LE 018B 04	90227S	LE 024B 03	90266S	LE 031B 09	90319S		
EL 014B 01	90085S	LE 018B 05	90228S	LE 024B 04	90267S	LE 031B 10	90320S		
EL 014B 02	90086S	LE 018B 06	90229S	LE 024B 05	90268S	LE 031C 0	90399S		
EL 014B 03	90087S	LE 018B 07	90230S	LE 024B 06	90269S	LE 031C 00	90398S		
EL 014B 04	90088S	LE 018B 08	90231S	LE 024B 07	90270S	LE 031C 001	90397S		
EL 014B 05	90089S	LE 018B 09	90232S	LE 024B 08	90271S	LE 031C 01	90400S		
EL 014B 06	90090S	LE 018B 10	90233S	LE 024B 09	90272S	LE 031C 02	90401S		
EL 014B 07	90091S	LE 018B 11	90234S	LE 024B 10	90273S	LE 031C 03	90402S		
EL 014C 01	90127S	LE 018B 12	90235S	LE 024B 11	90274S	LE 031C 04	90403S		
EL 014C 02	90128S	LE 018B 13	90236S	LE 024B 12	90275S	LE 031C 05	90404S		
EL 014C 03	90129S	LE 018B 1A	90224S	LE 024B 13	90276S	LE 031C 06	90405S		
EL 014C 04	90130S	LE 018C 01	90334S	LE 024B 14	90277S	LE 031C 07	90406S		
EL 014C 05	90131S	LE 018C 02	90335S	LE 024B 15	90278S	LE 031C 08	90407S		
EL 014C 06	90132S	LE 018C 03	90336S	LE 026B 0	90282S	LE 031C 09	90408S		
EL 014C 07	90133S	LE 018C 04	90337S	LE 026B 00	90281S	LE 031C 10	90409S		
EL 016B 01	90092S	LE 018C 05	90338S	LE 026B 001	90280S	LE 031C 11	90410S		
EL 016B 02	90093S	LE 018C 06	90339S	LE 026B 002	90279S	LE 031C 12	90411S		
EL 016B 03	90094S	LE 018C 07	90340S	LE 026B 01	90283S	LE 031C 13	90412S		
EL 016B 04	90095S	LE 018C 08	90341S	LE 026B 02	90284S	LE 031C 14	90413S		

Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
LT-014A-1LS	TO-5004LS	LT-018C-5RS	TO-5044RS	LT-025E-4LS	TO-5067LS	LT-035G-2RS	TO-5066RS	LT-048J-1LS	TO-5104LS
LT-014A-1R	TO-5004R	LT-018C-6L	TO-5039L	LT-025E-4R	TO-5067R	LT-035G-3L	TO-5069L	LT-048J-1R	TO-5104R
LT-014A-1RS	TO-5004RS	LT-018C-6LS	TO-5039LS	LT-025E-4RS	TO-5067RS	LT-035G-3LS	TO-5069LS	LT-048J-1RS	TO-5104RS
LT-014A-2L	TO-5008L	LT-018C-6R	TO-5039R	LT-025E-5L	TO-5075L	LT-035G-3R	TO-5069R	LT-048J-2L	TO-5106L
LT-014A-2LS	TO-5008LS	LT-018C-6RS	TO-5039RS	LT-025E-5LS	TO-5075LS	LT-035G-3RS	TO-5069RS	LT-048J-2LS	TO-5106LS
LT-014A-2R	TO-5008R	LT-020D-1L	TO-5027L	LT-025E-5R	TO-5075R	LT-035G-4L	TO-5113L	LT-048J-2R	TO-5106R
LT-014A-2RS	TO-5008RS	LT-020D-1LS	TO-5027LS	LT-025E-5RS	TO-5075RS	LT-035G-4LS	TO-5113LS	LT-048J-2RS	TO-5106RS
LT-014A-3L	TO-5005L	LT-020D-1R	TO-5027R	LT-025E-6L	TO-5071L	LT-035G-4R	TO-5113R	LT-048J-3L	TO-5109L
LT-014A-3LS	TO-5005LS	LT-020D-1RS	TO-5027RS	LT-025E-6LS	TO-5071LS	LT-035G-4RS	TO-5113RS	LT-048J-3LS	TO-5109LS
LT-014A-3R	TO-5005R	LT-020D-2L	TO-5019L	LT-025E-6R	TO-5071R	LT-035G-5L	TO-5111L	LT-048J-3R	TO-5109R
LT-014A-3RS	TO-5005RS	LT-020D-2LS	TO-5019LS	LT-025E-6RS	TO-5071RS	LT-035G-5LS	TO-5111LS	LT-048J-3RS	TO-5109RS
LT-014A-4L	TO-5029L	LT-020D-2R	TO-5019R	LT-028E-1L	TO-5054L	LT-035G-5R	TO-5111R	LT-048J-4L	TO-5162L
LT-014A-4LS	TO-5029LS	LT-020D-2RS	TO-5019RS	LT-028E-1LS	TO-5054LS	LT-035G-5RS	TO-5111RS	LT-048J-4LS	TO-5162LS
LT-014A-4R	TO-5029R	LT-020D-3L	TO-5017L	LT-028E-1R	TO-5054R	LT-035G-6L	TO-5123L	LT-048J-4R	TO-5162R
LT-014A-4RS	TO-5029RS	LT-020D-3LS	TO-5017LS	LT-028E-1RS	TO-5054RS	LT-035G-6LS	TO-5123LS	LT-048J-4RS	TO-5162RS
LT-014A-5L	TO-5032L	LT-020D-3R	TO-5017R	LT-028E-2L	TO-5048L	LT-035G-6R	TO-5123R	LT-048J-5L	TO-5161L
LT-014A-5R	TO-5032R	LT-020D-4L	TO-5042L	LT-028E-2R	TO-5048R	LT-038G-1L	TO-5103L	LT-048J-5R	TO-5161R
LT-014A-5RS	TO-5032RS	LT-020D-4LS	TO-5042LS	LT-028E-2RS	TO-5048RS	LT-038G-1LS	TO-5103LS	LT-048J-5RS	TO-5161RS
LT-014A-6L	TO-5033L	LT-020D-4R	TO-5042R	LT-028E-3L	TO-5043L	LT-038G-1R	TO-5103R	LT-048J-6L	TO-5159L
LT-014A-6LS	TO-5033LS	LT-020D-4RS	TO-5042RS	LT-028E-3LS	TO-5043LS	LT-038G-1RS	TO-5103RS	LT-048J-6LS	TO-5159LS
LT-014A-6R	TO-5033R	LT-020D-5L	TO-5055L	LT-028E-3R	TO-5043R	LT-038G-2L	TO-5085L	LT-048J-6R	TO-5159R
LT-014A-6RS	TO-5033RS	LT-020D-5LS	TO-5055LS	LT-028E-3RS	TO-5043RS	LT-038G-2LS	TO-5085LS	LT-048J-6RS	TO-5159RS
LT-015B-1L	TO-5003L	LT-020D-5R	TO-5055R	LT-028E-4L	TO-5074L	LT-038G-2R	TO-5085R	LT-051J-1L	TO-5107L
LT-015B-1LS	TO-5003LS	LT-020D-5RS	TO-5055RS	LT-028E-4LS	TO-5074LS	LT-038G-2RS	TO-5085RS	LT-051J-1LS	TO-5107LS
LT-015B-1R	TO-5003R	LT-020D-6L	TO-5050L	LT-028E-4R	TO-5074R	LT-038G-3L	TO-5077L	LT-051J-1R	TO-5107R
LT-015B-1RS	TO-5003RS	LT-020D-6LS	TO-5050LS	LT-028E-4RS	TO-5074RS	LT-038G-3LS	TO-5077LS	LT-051J-1RS	TO-5107RS
LT-015B-2L	TO-5007L	LT-020D-6R	TO-5050R	LT-028E-5L	TO-5072L	LT-038G-3R	TO-5077R	LT-051J-2L	TO-5110L
LT-015B-2LS	TO-5007LS	LT-020D-6RS	TO-5050RS	LT-028E-5LS	TO-5072LS	LT-038G-3RS	TO-5077RS	LT-051J-2LS	TO-5110LS
LT-015B-2R	TO-5007R	LT-021D-1L	TO-5031L	LT-028E-5R	TO-5072R	LT-038G-4L	TO-5127L	LT-051J-2R	TO-5110R
LT-015B-2RS	TO-5007RS	LT-021D-1LS	TO-5031LS	LT-028E-5RS	TO-5072RS	LT-038G-4LS	TO-5127LS	LT-051J-2RS	TO-5110RS
LT-015B-3L	TO-5006L	LT-021D-1R	TO-5031R	LT-028E-6L	TO-5079L	LT-038G-4R	TO-5127R	LT-051J-3L	TO-5112L
LT-015B-3LS	TO-5006LS	LT-021D-1RS	TO-5031RS	LT-028E-6LS	TO-5079LS	LT-038G-4RS	TO-5127RS	LT-051J-3LS	TO-5112LS
LT-015B-3R	TO-5006R	LT-021D-2L	TO-5022L	LT-028E-6R	TO-5079RS	LT-038G-5L	TO-5125L	LT-051J-3R	TO-5112R
LT-015B-3RS	TO-5006RS	LT-021D-2LS	TO-5022LS	LT-028E-6RS	TO-5079RS	LT-038G-5LS	TO-5125LS	LT-051J-3RS	TO-5112RS
LT-015B-4L	TO-5020L	LT-021D-2R	TO-5022R	LT-030F-1L	TO-5068L	LT-038G-5R	TO-5125R	LT-051J-4L	TO-5142L
LT-015B-4LS	TO-5020LS	LT-021D-2RS	TO-5022RS	LT-030F-1LS	TO-5068LS	LT-038G-5RS	TO-5125RS	LT-051J-4LS	TO-5142LS
LT-015B-4R	TO-5020R	LT-021D-3L	TO-5021L	LT-030F-1R	TO-5068R	LT-038G-6L	TO-5132L	LT-051J-4R	TO-5142R
LT-015B-4RS	TO-5020RS	LT-021D-3LS	TO-5021LS	LT-030F-1RS	TO-5068RS	LT-038G-6LS	TO-5132LS	LT-051J-4RS	TO-5142RS
LT-015B-5L	TO-5030L	LT-021D-3R	TO-5021R	LT-030F-2L	TO-5061L	LT-038G-6R	TO-5132R	LT-051J-5L	TO-5151L
LT-015B-5LS	TO-5030LS	LT-021D-3RS	TO-5021RS	LT-030F-2LS	TO-5061LS	LT-038G-6RS	TO-5132RS	LT-051J-5LS	TO-5151LS
LT-015B-5R	TO-5030R	LT-021D-4L	TO-5046L	LT-030F-2R	TO-5061R	LT-040H-1L	TO-5073L	LT-051J-5R	TO-5151R
LT-015B-5RS	TO-5030RS	LT-021D-4LS	TO-5046LS	LT-030F-2RS	TO-5061RS	LT-040H-1R	TO-5073R	LT-051J-6L	TO-5164L
LT-015B-6L	TO-5035L	LT-021D-4R	TO-5046R	LT-030F-3L	TO-5058L	LT-040H-1R	TO-5073R	LT-051J-6R	TO-5164R
LT-015B-6LS	TO-5035LS	LT-021D-4RS	TO-5046RS	LT-030F-3LS	TO-5058LS	LT-040H-1R	TO-5073RS	LT-051J-6LS	TO-5164LS
LT-015B-6R	TO-5035R	LT-021D-5L	TO-5045L	LT-030F-3R	TO-5058R	LT-040H-2L	TO-5076L	LT-051J-6R	TO-5164R
LT-015B-6RS	TO-5035RS	LT-021D-5LS	TO-5045LS	LT-030F-3RS	TO-5058RS	LT-040H-2L	TO-5076LS	LT-051J-6RS	TO-5164RS
LT-017C-1L	TO-5009L	LT-021D-5R	TO-5045R	LT-030F-4L	TO-5105L	LT-040H-2R	TO-5076R	LT-054K-1L	TO-5126L
LT-017C-1LS	TO-5009LS	LT-021D-5RS	TO-5045RS	LT-030F-4LS	TO-5105LS	LT-040H-2RS	TO-5076RS	LT-054K-1LS	TO-5126LS
LT-017C-1R	TO-5009R	LT-021D-6L	TO-5059L	LT-030F-4R	TO-5105R	LT-040H-3L	TO-5082L	LT-054K-1R	TO-5126R
LT-017C-1RS	TO-5009RS	LT-021D-6LS	TO-5059LS	LT-030F-4RS	TO-5105RS	LT-040H-3L	TO-5082LS	LT-054K-1RS	TO-5126RS
LT-017C-2L	TO-5015L	LT-021D-6R	TO-5059R	LT-030F-5L	TO-5097L	LT-040H-3R	TO-5082R	LT-054K-2L	TO-5130L
LT-017C-2LS	TO-5015LS	LT-021D-6RS	TO-5059RS	LT-030F-5LS	TO-5097LS	LT-040H-3RS	TO-5082RS	LT-054K-2LS	TO-5130LS
LT-017C-2R	TO-5015R	LT-023D-1L	TO-5034L	LT-030F-5R	TO-5097R	LT-040H-4L	TO-5134L	LT-054K-2R	TO-5130R
LT-017C-2RS	TO-5015RS	LT-023D-1LS	TO-5034LS	LT-030F-5RS	TO-5097RS	LT-040H-4LS	TO-5134LS	LT-054K-2RS	TO-5130RS
LT-017C-3L	TO-5010L	LT-023D-1R	TO-5034R	LT-030F-6L	TO-5108L	LT-040H-4R	TO-5134R	LT-054K-3L	TO-5133L
LT-017C-3LS	TO-5010LS	LT-023D-1RS	TO-5034RS	LT-030F-6LS	TO-5108LS	LT-040H-4RS	TO-5134RS	LT-054K-3LS	TO-5133RS
LT-017C-3R	TO-5010R	LT-023D-2L	TO-5028L	LT-030F-6RS	TO-5108RS	LT-040H-5L	TO-5131L	LT-054K-3R	TO-5133R
LT-017C-3RS	TO-5010RS	LT-023D-2LS	TO-5028LS	LT-030F-6R	TO-5108R	LT-040H-5LS	TO-5131LS	LT-054K-3RS	TO-5133RS
LT-017C-4L	TO-5047L	LT-023D-2R	TO-5028R	LT-032F-1L	TO-5065L	LT-040H-5R	TO-5131R	LT-054K-4L	TO-5167L
LT-017C-4LS	TO-5047LS	LT-023D-2RS	TO-5028RS	LT-032F-1LS	TO-5065LS	LT-040H-5RS	TO-5131RS	LT-054K-4LS	TO-5167LS
LT-017C-4R	TO-5047R	LT-023D-3L	TO-5023L	LT-032F-1R	TO-5065R	LT-040H-6L	TO-5129L	LT-054K-4R	TO-5167RS
LT-017C-5L	TO-5051L	LT-023D-3R	TO-5023R	LT-032F-2L	TO-5056L	LT-040H-6R	TO-5129R	LT-054K-5L	TO-5169L
LT-017C-5LS	TO-5051LS	LT-023D-3RS	TO-5023RS	LT-032F-2LS	TO-5056LS	LT-040H-6RS	TO-5129RS	LT-054K-5LS	TO-5169LS
LT-017C-5R	TO-5051R	LT-023D-4L	TO-5052L	LT-032F-2R	TO-5056R	LT-045H-1L	TO-5080L	LT-054K-5R	TO-5169R
LT-017C-5RS	TO-5051RS	LT-023D-4LS	TO-5052LS	LT-032F-2RS	TO-5056RS	LT-045H-1LS	TO-5080LS	LT-054K-5RS	TO-5169RS
LT-017C-6L	TO-5040L	LT-023D-4R	TO-5052R	LT-032F-3L	TO-5053L	LT-045H-1R	TO-5080RS	LT-054K-6L	TO-5174L
LT-017C-6R	TO-5040R	LT-023D-5L	TO-5049L	LT-032F-3R	TO-5053R	LT-045H-2L	TO-5100L	LT-054K-6R	TO-5174R
LT-017C-6RS	TO-5040RS	LT-023D-5LS	TO-5049LS	LT-032F-3RS	TO-5053RS	LT-045H-2LS	TO-5100LS	LT-054K-6RS	TO-5174RS
LT-018C-1L	TO-5018L	LT-023D-5R	TO-5049R	LT-032F-4L	TO-5091L	LT-045H-2R	TO-5100R	LT-059K-1L	TO-5128L
LT-018C-1LS	TO-5018LS	LT-023D-5RS	TO-5049RS	LT-032F-4LS	TO-5091LS	LT-045H-2RS	TO-5100RS	LT-059K-1LS	TO-5128LS
LT-018C-1R	TO-5018R	LT-023D-6L	TO-5057L	LT-032F-4R	TO-5091R	LT-045H-3L	TO-5102L	LT-059K-1R	TO-5128R
LT-018C-1RS	TO-5018RS	LT-023D-6LS	TO-5057LS	LT-032F-4RS	TO-5091RS	LT-045H-3LS	TO-5102LS	LT-059K-1RS	TO-5128RS
LT-018C-2L	TO-5012L	LT-023D-6R	TO-5057R	LT-032F-5L	TO-5078L	LT-045H-3R	TO-5102R	LT-059K-2L	TO-5135L
LT-018C-2LS	TO-5012LS	LT-023D-6RS	TO-5057RS	LT-032F-5LS	TO-5078LS	LT-045H-3RS	TO-5102RS	LT-059K-2LS	TO-5135LS
LT-018C-2R	TO-5012R	LT-025E-1L	TO-5041L	LT-032F-5R	TO-5078R	LT-045H-4L	TO-5153L	LT-059K-2R	TO-5135R
LT-018C-2RS	TO-5012RS	LT-025E-1LS	TO-5041LS	LT-032F-5RS	TO-5078RS	LT-045H-4LS	TO-5153LS	LT-059K-2RS	TO-5135RS
LT-018C-3L	TO-5011L	LT-025E-1R	TO-5041R	LT-032F-6L	TO-5101L	LT-045H-4R	TO-5153R	LT-059K-3L	TO-5136L
LT-018C-3LS	TO-5011LS	LT-025E-1RS	TO-5041RS	LT-032F-6LS	TO-5101LS	LT-045H-4RS	TO-5153RS	LT-059K-3LS	TO-5136LS
LT-018C-3R	TO-5011R	LT-025E-2L	TO-5038L	LT-032F-6R	TO-5101R	LT-045H-5L	TO-5140L	LT-059K-3R	TO-5136R
LT-018C-3RS	TO-5011RS	LT-025E-2LS	TO-5038LS	LT-032F-6RS	TO-5101RS	LT-045H-5LS	TO-5140LS	LT-059K-3RS	TO-5136RS
LT-018C-4L	TO-5036L	LT-025E-2R	TO-5038R	LT-035G-1L	TO-5070L	LT-045H-5R	TO-5140R		

Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.	Lee Spring Part No.	Century Spring Part No.
LT-059K-5RS	TO-5175RS	LT-070M-1RS	TO-5158RS	LT-075M-3RS	TO-5172RS	LT-078N-5RS	TO-5195RS	LT-095P-1RS	TO-5200RS
LT-059K-6L	TO-5177L	LT-070M-2L	TO-5163L	LT-075M-4L	TO-5182L	LT-078N-6L	TO-5219L	LT-095P-2L	TO-5202L
LT-059K-6LS	TO-5177LS	LT-070M-2LS	TO-5163LS	LT-075M-4LS	TO-5182LS	LT-078N-6LS	TO-5219LS	LT-095P-2LS	TO-5202LS
LT-059K-6R	TO-5177R	LT-070M-2R	TO-5163R	LT-075M-4R	TO-5182R	LT-078N-6R	TO-5219R	LT-095P-2R	TO-5202R
LT-059K-6RS	TO-5177RS	LT-070M-2RS	TO-5163RS	LT-075M-4RS	TO-5182RS	LT-078N-6RS	TO-5219RS	LT-095P-2RS	TO-5202RS
LT-063L-1L	TO-5145L	LT-070M-3L	TO-5166L	LT-075M-5L	TO-5193L	LT-085N-1L	TO-5178L	LT-095P-3L	TO-5207L
LT-063L-1LS	TO-5145LS	LT-070M-3LS	TO-5166LS	LT-075M-5LS	TO-5193LS	LT-085N-1R	TO-5178R	LT-095P-3R	TO-5207R
LT-063L-1R	TO-5145R	LT-070M-3R	TO-5166R	LT-075M-5R	TO-5193R	LT-085N-1RS	TO-5178RS	LT-095P-3RS	TO-5207RS
LT-063L-1RS	TO-5145RS	LT-070M-3RS	TO-5166RS	LT-075M-5RS	TO-5193RS	LT-085N-2L	TO-5189L	LT-095P-4L	TO-5220L
LT-063L-2L	TO-5157L	LT-070M-4L	TO-5192L	LT-075M-6L	TO-5216L	LT-085N-2LS	TO-5189LS	LT-095P-4LS	TO-5220LS
LT-063L-2LS	TO-5157LS	LT-070M-4LS	TO-5192LS	LT-075M-6LS	TO-5216LS	LT-085N-2R	TO-5189R	LT-095P-4R	TO-5220R
LT-063L-2R	TO-5157R	LT-070M-4R	TO-5192R	LT-075M-6R	TO-5216R	LT-085N-2RS	TO-5189RS	LT-095P-4RS	TO-5220RS
LT-063L-2RS	TO-5157RS	LT-070M-4RS	TO-5192RS	LT-075M-6RS	TO-5216RS	LT-085N-3L	TO-5191L	LT-095P-5L	TO-5228L
LT-063L-3L	TO-5160L	LT-070M-5L	TO-5194L	LT-078N-1L	TO-5168L	LT-085N-3LS	TO-5191LS	LT-095P-5LS	TO-5228LS
LT-063L-3LS	TO-5160LS	LT-070M-5LS	TO-5194LS	LT-078N-1LS	TO-5168LS	LT-085N-3R	TO-5191R	LT-095P-5R	TO-5228R
LT-063L-3R	TO-5160R	LT-070M-5R	TO-5194R	LT-078N-1R	TO-5168R	LT-085N-3RS	TO-5191RS	LT-095P-5RS	TO-5228RS
LT-063L-3RS	TO-5160RS	LT-070M-5RS	TO-5194RS	LT-078N-1RS	TO-5168RS	LT-085N-4L	TO-5201L	LT-095P-6L	TO-5245L
LT-063L-4L	TO-5186L	LT-070M-6L	TO-5196L	LT-078N-2L	TO-5173L	LT-085N-4LS	TO-5201LS	LT-095P-6LS	TO-5245LS
LT-063L-4LS	TO-5186LS	LT-070M-6LS	TO-5196LS	LT-078N-2LS	TO-5173LS	LT-085N-4R	TO-5201R	LT-095P-6R	TO-5245R
LT-063L-4R	TO-5186R	LT-070M-6R	TO-5196R	LT-078N-2R	TO-5173R	LT-085N-4RS	TO-5201RS	LT-095P-6RS	TO-5245RS
LT-063L-4RS	TO-5186RS	LT-070M-6RS	TO-5196RS	LT-078N-2RS	TO-5173RS	LT-085N-5L	TO-5213L		
LT-063L-5L	TO-5188L	LT-075M-1L	TO-5165L	LT-078N-3L	TO-5176L	LT-085N-5LS	TO-5213LS		
LT-063L-5LS	TO-5188LS	LT-075M-1LS	TO-5165LS	LT-078N-3LS	TO-5176LS	LT-085N-5R	TO-5213R		
LT-063L-5R	TO-5188R	LT-075M-1R	TO-5165R	LT-078N-3R	TO-5176R	LT-085N-5RS	TO-5213RS		
LT-063L-5RS	TO-5188RS	LT-075M-1RS	TO-5165RS	LT-078N-3RS	TO-5176RS	LT-085N-6L	TO-5223L		
LT-063L-6L	TO-5190L	LT-075M-2L	TO-5170L	LT-078N-4L	TO-5187L	LT-085N-6LS	TO-5223LS		
LT-063L-6LS	TO-5190LS	LT-075M-2LS	TO-5170LS	LT-078N-4LS	TO-5187LS	LT-085N-6R	TO-5223R		
LT-063L-6R	TO-5190R	LT-075M-2R	TO-5170R	LT-078N-4R	TO-5187R	LT-085N-6RS	TO-5223RS		
LT-063L-6RS	TO-5190RS	LT-075M-2RS	TO-5170RS	LT-078N-4RS	TO-5187RS	LT-085P-1L	TO-5200L		
LT-070M-1L	TO-5158L	LT-075M-3L	TO-5172L	LT-078N-5L	TO-5195L	LT-085P-1RS	TO-5200R		
LT-070M-1LS	TO-5158LS	LT-075M-3LS	TO-5172LS	LT-078N-5LS	TO-5195LS				
LT-070M-1R	TO-5158R	LT-075M-3R	TO-5172R	LT-078N-5R	TO-5195R				

Cross-Reference competitor part numbers on our website

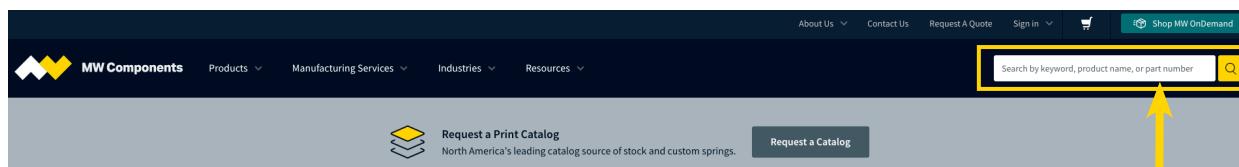

Welcome to Century Spring

Century Spring is a global leader in spring products, with more than 35,000 designs in stock. We are committed to providing a quality product and ensuring customer success. With stock and custom products made in the USA, we provide rapid turnaround, with many stock products shipping the same day.

Have a question? [800.237.5225](tel:8002375225) / info@centuryspring.com

Search Products

Browse our inventory of stock and standard parts, download CAD and purchase online.

[Shop Now](#)

Type in any competitor part number in our search box.
If you don't find what you're looking for, please email us at customquote@centuryspring.com

Order online CenturySpring.com

Associated Spring / Century Spring Part Numbers

Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.
Tapered Springs			
A0360-029-0250-S	TA-7000S	A0720-045-0625-S	TA-7056S
A0420-029-0250-S	TA-7003S	A0720-049-0375-S	TA-7060S
A0420-029-0312-S	TA-7002S	A0720-049-0500-S	TA-7059S
A0420-029-0375-S	TA-7001S	A0720-049-0625-S	TA-7058S
A0420-032-0250-S	TA-7005S	A0720-055-0375-S	TA-7062S
A0420-032-0312-S	TA-7004S	A0720-055-0500-S	TA-7061S
A0420-035-0250-S	TA-7006S	A0720-35-1000-S	TA-7042S
A0480-029-0312-S	TA-7010S	A0850-042-0750-S	TA-7066S
A0480-029-0375-S	TA-7009S	A0850-042-1000-S	TA-7065S
A0480-029-0500-S	TA-7008S	A0850-042-1250-S	TA-7064S
A0480-029-0625-S	TA-7007S	A0850-042-1500-S	TA-7063S
A0480-032-0312-S	TA-7014S	A0850-045-0750-S	TA-7070S
A0480-032-0375-S	TA-7013S	A0850-045-1000-S	TA-7069S
A0480-032-0500-S	TA-7012S	A0850-045-1250-S	TA-7068S
A0480-032-0625-S	TA-7011S	A0850-045-1500-S	TA-7067S
A0480-035-0312-S	TA-7016S	A0850-049-0625-S	TA-7073S
A0480-035-0375-S	TA-7015S	A0850-049-0750-S	TA-7072S
A0480-038-0250-S	TA-7018S	A0850-049-1250-S	TA-7071S
A0480-038-0312-S	TA-7017S	A0850-055-0625-S	TA-7076S
A0600-026-0750-S	TA-7021S	A0850-055-0750-S	TA-7075S
A0600-026-1000-S	TA-7020S	A0850-055-1000-S	TA-7074S
A0600-026-1250-S	TA-7019S	A0850-059-0625-S	TA-7078S
A0600-029-0625-S	TA-7025S	A0850-063-0500-S	TA-7080S
A0600-029-0750-S	TA-7024S	A0850-063-0625-S	TA-7079S
A0600-029-1000-S	TA-7023S	A0850-067-0500-S	TA-7081S
A0600-029-1250-S	TA-7022S	A0975-049-0750-S	TA-7085S
A0600-032-0500-S	TA-7028S	A0975-049-1000-S	TA-7084S
A0600-032-0625-S	TA-7027S	A0975-049-1250-S	TA-7083S
A0600-032-0750-S	TA-7026S	A0975-049-1500-S	TA-7082S
A0600-035-0500-S	TA-7031S	A0975-055-0750-S	TA-7089S
A0600-035-0625-S	TA-7030S	A0975-055-1000-S	TA-7088S
A0600-035-0750-S	TA-7029S	A0975-055-1250-S	TA-7087S
A0600-038-0375-S	TA-7034S	A0975-055-1500-S	TA-7086S
A0600-038-0500-S	TA-7033S	A0975-063-0750-S	TA-7094S
A0600-038-0625-S	TA-7032S	A0975-063-1000-S	TA-7093S
A0600-040-0375-S	TA-7037S	A0975-067-0625-S	TA-7096S
A0600-040-0500-S	TA-7036S	A0975-067-0750-S	TA-7095S
A0600-040-0625-S	TA-7035S	A0975-069-0750-S	TA-7092S
A0600-042-0375-S	TA-7039S	A0975-069-1000-S	TA-7091S
A0600-042-0500-S	TA-7038S	A0975-069-1250-S	TA-7090S
A0600-045-0375-S	TA-7040S	A0975-072-0625-S	TA-7098S
A0720-035-0750-S	TA-7043S	A0975-072-0750-S	TA-7097S
A0720-035-1250-S	TA-7041S	A0975-074-0625-S	TA-7099S
A0720-038-0625-S	TA-7047S	A0980-059-0750-S	TA-7077S
Disc Springs			
A0720-038-1000-S	TA-7045S	B0187-007	CDS-180907
A0720-038-1250-S	TA-7044S	B0187-010	CDS-180910
A0720-040-0500-S	TA-7051S	B0250-009	CDS-251209
A0720-040-0750-S	TA-7049S	B0250-013	CDS-251213
A0720-040-1000-S	TA-7048S	B0281-013	CDS-281313
A0720-042-0625-S	TA-7054S	B0281-015	CDS-281315
A0720-042-0750-S	TA-7053S	B0312-011	CDS-311511
A0720-042-1000-S	TA-7052S	B0312-012	CDS-311517
A0720-045-0500-S	TA-7057S	B0343-013	CDS-341613

Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.
Compression Springs			
C0057-006-0120	70000	C0057-006-0120S	70000S
C0057-006-0190	70001	C0057-006-0190S	70001S
C0057-006-0250	70002	C0057-006-0250S	70002S
C0057-006-0310	70003	C0057-006-0310S	70003S
C0057-006-0380	70004	C0057-006-0380S	70004S
C0057-006-0440	70005	C0057-006-0440S	70005S
C0057-006-0500	70006	C0057-006-0500S	70006S
C0057-006-0500S	70006S	C0057-006-0560	70007
C0057-006-0560	70007	C0057-006-0560S	70007S
C0057-006-0620	70008	C0057-006-0620S	70008S
C0057-007-0120	70009	C0057-007-0120S	70009S
C0057-007-0190	70010	C0057-007-0190S	70010S
C0057-007-0250	70011	C0057-007-0250S	70011S
C0057-007-0310	70012	C0057-007-0310S	70012S
C0057-007-0380	70013	C0057-007-0380S	70013S
C0057-007-0380S	70013S	C0057-007-0440	70014
C0057-007-0440	70014	C0057-007-0440S	70014S
C0057-007-0500	70015	C0057-007-0500S	70015S
C0057-007-0500S	70015S	C0057-007-0560	70016
C0057-007-0560	70016	C0057-007-0560S	70016S
C0057-007-0620	70017	C0057-007-0620S	70017S
C0057-007-0620S	70017S	C0057-008-0120	70018
C0057-008-0120	70018	C0057-008-0120S	70018S
C0057-008-0190	70019	C0057-008-0190S	70019S
C0057-008-0250	70020	C0057-008-0250S	70020S
C0057-008-0250S	70020S	C0057-008-0250S	70020S
C0057-008-0310	70021	C0057-008-0310S	70021S
C0057-008-0310S	70021S	C0057-008-0380	70022
C0057-008-0380	70022	C0057-008-0380S	70022S
C0057-008-0440	70023	C0057-008-0440S	70023S
C0057-008-0440S	70023S	C0057-008-0500	70024
C0057-008-0500	70024	C0057-008-0500S	70024S
C0057-008-0500S	70024S	C0057-008-0560	70025
C0057-008-0560	70025	C0057-008-0560S	70025S
C0057-008-0620	70026	C0057-008-0620S	70026S
C0057-008-0620S	70026S	C0057-008-0620S	70027
C0057-008-0620S	70027	C0057-008-0620S	70027S
C0057-008-0620S	70027S	C0057-008-0620S	70028
C0057-008-0620S	70028	C0057-008-0620S	70028S
C0057-008-0620S	70028S	C0057-008-0620S	70029
C0057-008-0620S	70029	C0057-008-0620S	70029S
C0057-008-0620S	70029S	C0057-008-0620S	70030
C0057-008-0620S	70030	C0057-008-0620S	70030S
C0057-008-0620S	70030S	C0057-008-0620S	70031
C0057-008-0620S	70031	C0057-008-0620S	70031S
C0057-008-0620S	70031S	C0057-008-0620S	70032
C0057-008-0620S	70032	C0057-008-0620S	70032S
C0057-008-0620S	70032S	C0057-008-0620S	70033
C0057-008-0620S	70033	C0057-008-0620S	70033S
C0057-008-0620S	70033S	C0057-008-0620S	70034
C0057-008-0620S	70034	C0057-008-0620S	70034S
C0057-008-0620S	70034S	C0057-008-0620S	70035
C0057-008-0620S	70035	C0057-008-0620S	70035S
C0057-008-0620S	70035S	C0057-008-0620S	70036
C0057-008-0620S	70036	C0057-008-0620S	70036S
C0057-008-0620S	70036S	C0057-008-0620S	70037
C0057-008-0620S	70037	C0057-008-0620S	70037S
C0057-008-0620S	70037S	C0057-008-0620S	70038
C0057-008-0620S	70038	C0057-008-0620S	70038S
C0057-008-0620S	70038S	C0057-008-0620S	70039
C0057-008-0620S	70039	C0057-008-0620S	70039S
C0057-008-0620S	70039S	C0057-008-0620S	70040
C0057-008-0620S	70040	C0057-008-0620S	70040S
C0057-008-0620S	70040S	C0057-008-0620S	70041
C0057-008-0620S	70041	C0057-008-0620S	70041S
C0057-008-0620S	70041S	C0057-008-0620S	70042
C0057-008-0620S	70042	C0057-008-0620S	70042S
C0057-008-0620S	70042S	C0057-008-0620S	70043
C0057-008-0620S	70043	C0057-008-0620S	70043S

Associated Spring / Century Spring Part Numbers

Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.
C0120-012-1250	70088	C0120-018-1250S	70149S	C0120-024-1250	70204	C0180-012-1000S	70256S	C0180-018-1500	70320
C0120-012-1250S	70088S	C0120-018-1500	70152	C0120-024-1250S	70204S	C0180-012-1250	70257	C0180-018-1500S	70320S
C0120-012-1500	70089	C0120-018-1500S	70152S	C0120-024-1500	70205	C0180-012-1250S	70257S	C0180-018-1750	70321
C0120-012-1500S	70089S	C0120-020-0250	70153	C0120-024-1500S	70205S	C0180-012-1500	70258	C0180-018-1750S	70321S
C0120-014-0250	70090	C0120-020-0250S	70153S	C0148-021-0250	70206	C0180-012-1500S	70258S	C0180-020-0250	70322
C0120-014-0250S	70090S	C0120-020-0310	70154	C0148-021-0250S	70206S	C0180-014-0250	70259	C0180-020-0250S	70322S
C0120-014-0380	70092	C0120-020-0310S	70154S	C0148-021-0310	70207	C0180-014-0310	70260	C0180-020-0310	70323
C0120-014-0380S	70092S	C0120-020-0380	70155	C0148-021-0310S	70207S	C0180-014-0310S	70260S	C0180-020-0380	70324
C0120-014-0440	70093	C0120-020-0380S	70155S	C0148-021-0380	70208	C0180-014-0380	70261	C0180-020-0380S	70324S
C0120-014-0440S	70093S	C0120-020-0440	70156	C0148-021-0380S	70208S	C0180-014-0440	70261S	C0180-020-0440	70325
C0120-014-0500	70094	C0120-020-0440S	70156S	C0148-021-0440	70209	C0180-014-0440S	70262	C0180-020-0440S	70325S
C0120-014-0500S	70094S	C0120-020-0500	70157	C0148-021-0440S	70209S	C0180-014-0500	70263	C0180-020-0500	70326
C0120-014-0560	70095	C0120-020-0500S	70157S	C0148-021-0500	70210	C0180-014-0560	70263S	C0180-020-0560	70327
C0120-014-0560S	70095S	C0120-020-0560	70158	C0148-021-0500S	70210S	C0180-014-0500S	70263S	C0180-020-0560S	70327S
C0120-014-0620	70096	C0120-020-0560S	70158S	C0148-021-0560	70211	C0180-014-0560	70264	C0180-020-0620	70328
C0120-014-0620S	70096S	C0120-020-0620	70159	C0148-021-0560S	70211S	C0180-014-0620	70265	C0180-020-0620S	70328S
C0120-014-0690	70097	C0120-020-0620S	70159S	C0148-021-0620	70212	C0180-014-0690	70265S	C0180-020-0690	70329
C0120-014-0690S	70097S	C0120-020-0690	70160	C0148-021-0620S	70212S	C0180-014-0690S	70266	C0180-020-0690S	70329S
C0120-014-0750	70098	C0120-020-0690S	70160S	C0148-021-0690	70213	C0180-014-0690	70266S	C0180-020-0750	70330
C0120-014-0750S	70098S	C0120-020-0750	70161	C0148-021-0690S	70213S	C0180-014-0750	70267	C0180-020-0750S	70330S
C0120-014-0810	70099	C0120-020-0750S	70161S	C0148-021-0750	70214	C0180-014-0750S	70267S	C0180-020-0810	70333
C0120-014-0810S	70099S	C0120-020-0810	70162	C0148-021-0750S	70214S	C0180-014-0750	70267S	C0180-020-0810S	70333S
C0120-014-0880	70100	C0120-020-0810S	70162S	C0148-021-0810	70215	C0180-014-0750S	70267S	C0180-020-1000	70336
C0120-014-0880S	70100S	C0120-020-0880	70163	C0148-021-0810S	70215S	C0180-014-0880	70270	C0180-020-1000S	70336S
C0120-014-0910	70101	C0120-020-0880S	70163S	C0148-021-0880	70216	C0180-014-0880S	70270S	C0180-020-1250	70339
C0120-014-0910S	70101S	C0120-020-0940	70164	C0148-021-0880S	70216S	C0180-014-1000	70273	C0180-020-1250S	70339S
C0120-014-0940	70102	C0120-020-0940S	70164S	C0148-021-0940	70217	C0180-014-1000S	70273S	C0180-020-1250S	70339S
C0120-014-0940S	70102S	C0120-020-1000	70165	C0148-021-0940S	70217S	C0180-014-1250	70276	C0180-020-1380	70340
C0120-014-1000	70103	C0120-020-1000S	70165S	C0148-021-1000	70218	C0180-014-1250S	70276S	C0180-020-1380S	70340S
C0120-014-1000S	70103S	C0120-020-1120	70166	C0148-021-1000S	70218S	C0180-014-1380	70277	C0180-020-1500	70341
C0120-014-1120	70104	C0120-020-1120S	70166S	C0148-021-1250	70221	C0180-014-1500	70278	C0180-020-1500S	70341S
C0120-014-1120S	70104S	C0120-020-1250	70167	C0148-021-1500	70224	C0180-014-1500S	70278S	C0180-020-1750	70342
C0120-014-1250	70105	C0120-020-1250S	70167S	C0148-021-1500S	70224S	C0180-016-0250	70280	C0180-020-1750S	70342S
C0120-014-1250S	70105S	C0120-020-1500	70170	C0148-023-0250	70225	C0180-016-0250S	70280S	C0180-022-0250	70343
C0120-014-1500	70108	C0120-020-1500S	70170S	C0148-023-0250S	70225S	C0180-016-0310	70281	C0180-022-0250S	70343S
C0120-014-1500S	70108S	C0120-022-0250	70171	C0148-023-0310	70226	C0180-016-0310S	70281S	C0180-022-0310	70344
C0120-016-0190	70109	C0120-022-0250S	70171S	C0148-023-0310S	70226S	C0180-016-0380	70282	C0180-022-0310S	70344S
C0120-016-0190S	70109S	C0120-022-0310	70172	C0148-023-0380	70227	C0180-016-0380S	70282S	C0180-022-0380	70345
C0120-016-0250	70110	C0120-022-0310S	70172S	C0148-023-0380S	70227S	C0180-016-0440	70283	C0180-022-0380S	70345S
C0120-016-0250S	70110S	C0120-022-0380	70173	C0148-023-0440	70228	C0180-016-0440S	70283S	C0180-022-0440	70346
C0120-016-0310	70111	C0120-022-0380S	70173S	C0148-023-0440S	70228S	C0180-016-0500	70284	C0180-022-0440S	70346S
C0120-016-0310S	70111S	C0120-022-0440	70174	C0148-023-0500	70229	C0180-016-0500S	70284S	C0180-022-0500	70347
C0120-016-0380	70112	C0120-022-0440S	70174S	C0148-023-0500S	70229S	C0180-016-0560	70285	C0180-022-0500S	70347S
C0120-016-0380S	70112S	C0120-022-0500	70175	C0148-023-0560	70230	C0180-016-0560S	70285S	C0180-022-0560	70348
C0120-016-0440	70113	C0120-022-0500S	70175S	C0148-023-0560S	70230S	C0180-016-0620	70286	C0180-022-0560S	70348S
C0120-016-0440S	70113S	C0120-022-0560	70176	C0148-023-0620	70231	C0180-016-0620S	70286S	C0180-022-0620	70349
C0120-016-0500	70114	C0120-022-0560S	70176S	C0148-023-0620S	70231S	C0180-016-0690	70287	C0180-022-0620S	70349S
C0120-016-0500S	70114S	C0120-022-0620	70177	C0148-023-0690	70232	C0180-016-0690S	70287S	C0180-022-0690	70350
C0120-016-0560	70115	C0120-022-0620S	70177S	C0148-023-0690S	70232S	C0180-016-0750	70288	C0180-022-0690S	70350S
C0120-016-0620	70116	C0120-022-0690	70178	C0148-023-0750	70233	C0180-016-0750S	70288S	C0180-022-0750	70351
C0120-016-0620S	70116S	C0120-022-0750	70179	C0148-023-0750S	70233S	C0180-016-0880	70291	C0180-022-0750S	70351S
C0120-016-0690	70117	C0120-022-0750S	70179S	C0148-023-0810	70234	C0180-016-0880S	70291S	C0180-022-0810	70352
C0120-016-0690S	70117S	C0120-022-0810	70180	C0148-023-0810S	70234S	C0180-016-1000	70294	C0180-022-0810S	70352S
C0120-016-0750	70118	C0120-022-0810S	70180S	C0148-023-0880	70235	C0180-016-1000S	70294S	C0180-022-0940	70355
C0120-016-0750S	70118S	C0120-022-0940	70183	C0148-023-0880S	70235S	C0180-016-1250	70297	C0180-022-0940S	70355S
C0120-016-1000	70125	C0120-022-0940S	70183S	C0148-023-0940	70236	C0180-016-1380	70298	C0180-022-1000	70356
C0120-016-1000S	70125S	C0120-022-1000	70184	C0148-023-0940S	70236S	C0180-016-1380S	70298S	C0180-022-1120	70357
C0120-016-1120	70126	C0120-022-1000S	70184S	C0148-023-1000	70237	C0180-016-1380S	70298S	C0180-022-1120S	70357S
C0120-016-1120S	70126S	C0120-022-1120	70185	C0148-023-1000S	70237S	C0180-016-1500	70299	C0180-022-1250	70358
C0120-016-1250	70127	C0120-022-1120S	70185S	C0148-023-1250	70240	C0180-016-1750	70300	C0180-022-1250S	70358S
C0120-016-1500	70130	C0120-022-1250S	70186S	C0148-023-1500	70243	C0180-016-1750S	70300S	C0180-022-1500	70361
C0120-016-1500S	70130S	C0120-022-1500	70189	C0148-023-1500S	70243S	C0180-018-0250	70301	C0180-022-1500S	70361S
C0120-018-0190	70131	C0120-022-1500S	70189S	C0180-012-0250	70244	C0180-018-0250S	70301S	C0180-022-1750	70362
C0120-018-0190S	70131S	C0120-024-0310	70191	C0180-012-0250S	70244S	C0180-018-0310	70302	C0180-022-1750S	70362S
C0120-018-0250	70132	C0120-024-0310S	70191S	C0180-012-0310	70245	C0180-018-0310S	70302S	C0180-024-0250	70363
C0120-018-0310	70133	C0120-024-0380S	70192S	C0180-012-0380	70246	C0180-018-0380S	70303	C0180-024-0310	70364
C0120-018-0310S	70133S	C0120-024-0440	70193	C0180-012-0380S	70246S	C0180-018-0440	70304	C0180-024-0310S	70364S
C0120-018-0380	70134	C0120-024-0440S	70193S	C0180-012-0440	70247	C0180-018-0440S	70304S	C0180-024-0380	70365
C0120-018-0380S	70134S	C0120-024-0500	70194	C0180-012-0440S	70247S	C0180-018-0500	70305	C0180-024-0380S	70365S
C0120-018-0440	70135	C0120-024-0500S	70194S	C0180-012-0500S	70248	C0180-018-0500S	70305S	C0180-024-0440	70366
C0120-018-0440S	70135S	C0120-024-0560	70195	C0180-012-0560S	70248S	C0180-018-0560	70306	C0180-024-0440S	70366S
C0120-018-0500	70136	C0120-024-0560S	70195S	C0180-012-0560	70249	C0180-018-0560S	70306S	C0180-024-0500	70367
C0120-018-0500S	70136S	C0120-024-0620	70196	C0180-012-0560S	70249S	C0180-018-0620</td			

Associated Spring / Century Spring Part Numbers



Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.
C0180-024-1250S	70380S	C0180-032-0620	70431	C0210-018-2000S	70475S	C0240-016-1250	70532	C0240-022-0750S	70585S
C0180-024-1500	70383	C0180-032-0620S	70431S	C0210-022-0250	70476	C0240-016-1250S	70532S	C0240-022-0810	70586
C0180-024-1500S	70383S	C0180-032-0690	70432	C0210-022-0250S	70476S	C0240-016-1500	70533	C0240-022-0810S	70586S
C0180-024-1750	70384	C0180-032-0690S	70432S	C0210-022-0310	70477	C0240-016-1500S	70533S	C0240-022-1000	70591
C0180-024-1750S	70384S	C0180-032-0750	70433	C0210-022-0310S	70477S	C0240-016-1750	70534	C0240-022-1000S	70591S
C0180-024-2000	70385	C0180-032-0750S	70433S	C0210-022-0380	70478	C0240-016-1750S	70534S	C0240-022-1250	70594
C0180-024-2000S	70385S	C0180-032-0810	70434	C0210-022-0380S	70478S	C0240-016-2000	70535	C0240-022-1250S	70594S
C0180-026-0250	70386	C0180-032-0810S	70434S	C0210-022-0440	70479	C0240-016-2000S	70535S	C0240-022-1500	70597
C0180-026-0250S	70386S	C0180-032-0880	70435	C0210-022-0440S	70479S	C0240-018-0250	70536	C0240-022-1500S	70597S
C0180-026-0310	70387	C0180-032-0880S	70435S	C0210-022-0500	70480	C0240-018-0250S	70536S	C0240-022-1750	70598
C0180-026-0310S	70387S	C0180-032-0940	70436	C0210-022-0500S	70480S	C0240-018-0310	70537	C0240-022-1750S	70598S
C0180-026-0380	70388	C0180-032-0940S	70436S	C0210-022-0560	70481	C0240-018-0310S	70537S	C0240-022-2000	70599
C0180-026-0380S	70388S	C0180-032-1000	70437	C0210-022-0560S	70481S	C0240-018-0380	70538	C0240-022-2000S	70599S
C0180-026-0440	70389	C0180-032-1000S	70437S	C0210-022-0620	70482	C0240-018-0380S	70538S	C0240-024-0380	70600
C0180-026-0440S	70389S	C0180-032-1120	70438	C0210-022-0620S	70482S	C0240-018-0440	70539	C0240-024-0380S	70600S
C0180-026-0500	70390	C0180-032-1120S	70438S	C0210-022-0690	70483	C0240-018-0440S	70539S	C0240-024-0440	70601
C0180-026-0500S	70390S	C0180-032-1250	70439	C0210-022-0690S	70483S	C0240-018-0500	70540	C0240-024-0440S	70601S
C0180-026-0560	70391	C0180-032-1250S	70439S	C0210-022-0720	70484	C0240-018-0500S	70540S	C0240-024-0500	70602
C0180-026-0560S	70391S	C0180-032-1380	70440	C0210-022-0750S	70484S	C0240-018-0560	70541	C0240-024-0500S	70602S
C0180-026-0620	70392	C0180-032-1380S	70440S	C0210-022-0810	70485	C0240-018-0560S	70541S	C0240-024-0560	70603
C0180-026-0620S	70392S	C0180-032-1500	70441	C0210-022-0810S	70485S	C0240-018-0620	70542	C0240-024-0560S	70603S
C0180-026-0690	70393	C0180-032-1500S	70441S	C0210-022-0880	70486	C0240-018-0620S	70542S	C0240-024-0620	70604
C0180-026-0690S	70393S	C0180-032-1750	70442	C0210-022-0880S	70486S	C0240-018-0690	70543	C0240-024-0620S	70604S
C0180-026-0750	70394	C0180-032-1750S	70442S	C0210-022-1000	70489	C0240-018-0690S	70543S	C0240-024-0690	70605
C0180-026-0750S	70394S	C0180-032-2000	70443	C0210-022-1000S	70489S	C0240-018-0750	70544	C0240-024-0690S	70605S
C0180-026-0810	70395	C0180-032-2000S	70443S	C0210-022-1250	70492	C0240-018-0750S	70544S	C0240-024-0750	70606
C0180-026-0810S	70395S	C0180-035-0380	70444	C0210-022-1250S	70492S	C0240-018-0810	70545	C0240-024-0750S	70606S
C0180-026-0880	70396	C0180-035-0380S	70444S	C0210-022-1500	70495	C0240-018-0810S	70545S	C0240-024-0810	70607
C0180-026-0880S	70396S	C0180-035-0440	70445	C0210-022-1500S	70495S	C0240-018-0880	70546	C0240-024-0810S	70607S
C0180-026-1000	70399	C0180-035-0440S	70445S	C0210-022-1750	70496	C0240-018-0880S	70546S	C0240-024-0880	70608
C0180-026-1000S	70399S	C0180-035-0500	70446	C0210-022-1750S	70496S	C0240-018-1000	70548	C0240-024-0880S	70608S
C0180-026-1120	70400	C0180-035-0500S	70446S	C0210-022-2000	70497	C0240-018-1000S	70548S	C0240-024-1000	70611
C0180-026-1250	70401	C0180-035-0560	70447	C0210-022-2000S	70497S	C0240-018-1250	70549	C0240-024-1000S	70611S
C0180-026-1250S	70401S	C0180-035-0620	70448	C0210-026-0250	70498	C0240-018-1250S	70549S	C0240-024-1250	70614
C0180-026-1500	70404	C0180-035-0620S	70448S	C0210-026-0310	70499	C0240-018-1500	70550	C0240-024-1250S	70614S
C0180-026-1500S	70404S	C0180-035-0690	70449	C0210-026-0310S	70499S	C0240-018-1750	70551	C0240-024-1500	70617
C0180-026-1750	70405	C0180-035-0690S	70449S	C0210-026-0380	70500	C0240-018-1750S	70551S	C0240-024-1750	70618
C0180-026-1750S	70405S	C0180-035-0750	70450	C0210-026-0380S	70500S	C0240-018-2000	70552	C0240-024-1750S	70618S
C0180-026-2000	70406	C0180-035-0750S	70450S	C0210-026-0440	70501	C0240-018-2000S	70552S	C0240-024-2000	70619
C0180-026-2000S	70406S	C0180-035-0810	70451	C0210-026-0440S	70501S	C0240-020-0250	70553	C0240-024-2000S	70619S
C0180-029-0250	70407	C0180-035-0810S	70451S	C0210-026-0500	70502	C0240-020-0250S	70553S	C0240-026-0310	70620
C0180-029-0250S	70407S	C0180-035-0840	70452	C0210-026-0500S	70502S	C0240-020-0310	70554	C0240-026-0310S	70620S
C0180-029-0310	70408	C0180-035-0840S	70452S	C0210-026-0560	70503	C0240-020-0310S	70554S	C0240-026-0380	70621
C0180-029-0310S	70408S	C0180-035-0880	70453	C0210-026-0560S	70503S	C0240-020-0380	70555	C0240-026-0380S	70621S
C0180-029-0380	70409	C0180-035-0880S	70453S	C0210-026-0620	70504	C0240-020-0380S	70555S	C0240-026-0440	70622
C0180-029-0380S	70409S	C0180-035-1000	70454	C0210-026-0620S	70504S	C0240-020-0440	70556	C0240-026-0440S	70622S
C0180-029-0440	70410	C0180-035-1000S	70454S	C0210-026-0690	70505	C0240-020-0440S	70556S	C0240-026-0500	70623
C0180-029-0440S	70410S	C0180-035-1120	70455	C0210-026-0690S	70505S	C0240-020-0500	70557	C0240-026-0500S	70623S
C0180-029-0500	70411	C0180-035-1120S	70455S	C0210-026-0750	70506	C0240-020-0500S	70557S	C0240-026-0560	70624
C0180-029-0500S	70411S	C0180-035-1250	70456	C0210-026-0750S	70506S	C0240-020-0560	70558	C0240-026-0560S	70624S
C0180-029-0560	70412	C0180-035-1250S	70456S	C0210-026-0810	70507	C0240-020-0560S	70558S	C0240-026-0620	70625
C0180-029-0560S	70412S	C0180-035-1500	70457	C0210-026-0810S	70507S	C0240-020-0620	70558	C0240-026-0620S	70625S
C0180-029-0620	70413	C0180-035-1500S	70457S	C0210-026-0880	70508	C0240-020-0620S	70560S	C0240-026-0690	70626
C0180-029-0620S	70413S	C0180-035-1750	70458	C0210-026-0880S	70508S	C0240-020-0690	70562	C0240-026-0690S	70626S
C0180-029-0690	70414	C0180-035-1750S	70458S	C0210-026-1000	70511	C0240-020-0690S	70562S	C0240-026-0750	70627
C0180-029-0690S	70414S	C0180-035-2000	70459	C0210-026-1000S	70511S	C0240-020-0750	70563	C0240-026-0750S	70627S
C0180-029-0750	70415	C0180-035-2000S	70459S	C0210-026-1250	70514	C0240-020-0750S	70563S	C0240-026-0810	70628
C0180-029-0750S	70415S	C0210-018-0250	70460	C0210-026-1250S	70514S	C0240-020-0810	70564	C0240-026-0810S	70628S
C0180-029-0810	70416	C0210-018-0250S	70460S	C0210-026-1500	70517	C0240-020-0810S	70564S	C0240-026-0880	70629
C0180-029-0810S	70416S	C0210-018-0310	70461	C0210-026-1500S	70517S	C0240-020-0880S	70565	C0240-026-0880S	70629S
C0180-029-0880	70417	C0210-018-0310S	70461S	C0210-026-1750	70518	C0240-020-1000	70568	C0240-026-1000S	70632S
C0180-029-0880S	70417S	C0210-018-0380	70462	C0210-026-1750S	70518S	C0240-020-1000S	70568S	C0240-026-1250	70635
C0180-029-0940	70418	C0210-018-0380S	70462S	C0210-026-2000	70519	C0240-020-1000S	70568S	C0240-026-1250S	70635S
C0180-029-0940S	70418S	C0210-018-0440	70463	C0210-026-2000S	70519S	C0240-020-1250	70571	C0240-026-1500	70638
C0180-029-1000	70419	C0210-018-0440S	70463S	C0240-016-0250	70520	C0240-020-1250S	70571S	C0240-026-1500S	70638S
C0180-029-1000S	70419S	C0210-018-0500	70464	C0240-016-0250S	70520S	C0240-020-1500	70574	C0240-026-1500S	70638S
C0180-029-1120	70420	C0210-018-0500S	70464S	C0240-016-0310	70521	C0240-020-1500S	70574S	C0240-026-1750S	70639S
C0180-029-1120S	70420S	C0210-018-0560	70465	C0240-016-0380	70522	C0240-020-1750S	70575	C0240-026-2000	70640
C0180-029-1250	70421	C0210-018-0560S	70465S	C0240-016-0380S	70522S	C0240-020-2000	70576	C0240-026-2000S	70640S
C0180-029-1250S	70421S	C0210-018-0620	70466	C0240-016-0440	70523	C0240-020-2000S	70576S	C0240-029-0380	70643
C0180-029-1380	70422	C0210-018-0620S	70466S	C0240-016-0440S	70523S	C0240-020-2250	70577	C0240-029-0380S	70643S
C0180-029-1380S	70422S	C0210-018-0690	70467	C0240-016-0440S	70523S	C0240-020-250S	70577S	C0240-029-0440	70644
C0180-029-1500	70423	C0210-018-0690S	70467S	C0240-016-0500	70524	C0240-022-0310	70578	C0240-029-0440S	70644S
C0180-029-1500S	70423S	C							

Associated Spring / Century Spring Part Numbers

Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.
C0240-029-0940	70652	C0240-038-0310S	70700S	C0240-042-0690	70747	C0300-022-2500S	70800S	C0300-032-1500	70863
C0240-029-0940S	70652S	C0240-038-0380	70701	C0240-042-0690S	70747S	C0300-026-0440	70803	C0300-032-1500S	70863S
C0240-029-1000	70653	C0240-038-0380S	70701S	C0240-042-0750	70748	C0300-026-0440S	70803S	C0300-032-1750	70864
C0240-029-1000S	70653S	C0240-038-0440	70702	C0240-042-0750S	70748S	C0300-026-0500	70804	C0300-032-1750S	70864S
C0240-029-1120	70654	C0240-038-0440S	70702S	C0240-042-0810	70749	C0300-026-0500S	70804S	C0300-032-2000	70865
C0240-029-1120S	70654S	C0240-038-0500	70703	C0240-042-0810S	70749S	C0300-026-0560	70805	C0300-032-2000S	70865S
C0240-029-1250	70655	C0240-038-0500S	70703S	C0240-042-0880	70750	C0300-026-0560S	70805S	C0300-032-2250	70866
C0240-029-1250S	70655S	C0240-038-0560	70704	C0240-042-0880S	70750S	C0300-026-0620	70806	C0300-032-2250S	70866S
C0240-029-1380	70656	C0240-038-0560S	70704S	C0240-042-0940	70751	C0300-026-0620S	70806S	C0300-032-2500	70867
C0240-029-1380S	70656S	C0240-038-0620	70705	C0240-042-0940S	70751S	C0300-026-0690	70807	C0300-032-2500S	70867S
C0240-029-1500	70657	C0240-038-0620S	70705S	C0240-042-1000	70752	C0300-026-0690S	70807S	C0300-035-0380	70868
C0240-029-1500S	70657S	C0240-038-0690	70706	C0240-042-1000S	70752S	C0300-026-0750	70808	C0300-035-0380S	70868S
C0240-029-1750	70658	C0240-038-0690S	70706S	C0240-042-1120	70753	C0300-026-0750S	70808S	C0300-035-0440	70869
C0240-029-1750S	70658S	C0240-038-0750	70707	C0240-042-1120S	70753S	C0300-026-0810	70809	C0300-035-0440S	70869S
C0240-029-2000	70659	C0240-038-0750S	70707S	C0240-042-1250	70754	C0300-026-0810S	70809S	C0300-035-0500	70870
C0240-029-2000S	70659S	C0240-038-0810	70708	C0240-042-1250S	70754S	C0300-026-0880	70810	C0300-035-0500S	70870S
C0240-032-0310	70660	C0240-038-0810S	70708S	C0240-042-1380	70755	C0300-026-0880S	70810S	C0300-035-0560	70871
C0240-032-0310S	70660S	C0240-038-0880	70709	C0240-042-1380S	70755S	C0300-026-0940	70811	C0300-035-0560S	70871S
C0240-032-0380	70661	C0240-038-0880S	70709S	C0240-042-1500	70756	C0300-026-0940S	70811S	C0300-035-0620	70872
C0240-032-0380S	70661S	C0240-038-0940	70710	C0240-042-1500S	70756S	C0300-026-1000	70812	C0300-035-0620S	70872S
C0240-032-0440	70662	C0240-038-0940S	70710S	C0240-042-1750	70757	C0300-026-1000S	70812S	C0300-035-0690	70873
C0240-032-0440S	70662S	C0240-038-1000	70711	C0240-042-1750S	70757S	C0300-026-1250	70815	C0300-035-0690S	70873S
C0240-032-0500	70663	C0240-038-1000S	70711S	C0240-042-2000	70758	C0300-026-1250S	70815S	C0300-035-0750	70874
C0240-032-0500S	70663S	C0240-038-1120	70712	C0240-042-2000S	70758S	C0300-026-1500	70818	C0300-035-0750S	70874S
C0240-032-0560	70664	C0240-038-1120S	70712S	C0240-042-2250	70759	C0300-026-1500S	70818S	C0300-035-0810	70875
C0240-032-0560S	70664S	C0240-038-1250	70713	C0240-042-2250S	70759S	C0300-026-1750	70819	C0300-035-0810S	70875S
C0240-032-0620	70665	C0240-038-1250S	70713S	C0240-042-2500	70760	C0300-026-1750S	70819S	C0300-035-0880	70876
C0240-032-0620S	70665S	C0240-038-1380	70714	C0240-042-2500S	70760S	C0300-026-2000	70820	C0300-035-0880S	70876S
C0240-032-0690	70666	C0240-038-1380S	70714S	C0240-045-0440	70762	C0300-026-2000S	70820S	C0300-035-0940	70877
C0240-032-0690S	70666S	C0240-038-1500	70715	C0240-045-0440S	70762S	C0300-026-2250	70821	C0300-035-0940S	70877S
C0240-032-0750	70667	C0240-038-1500S	70715S	C0240-045-0500	70763	C0300-026-2250S	70821S	C0300-035-1000	70878
C0240-032-0750S	70667S	C0240-038-1750	70716	C0240-045-0500S	70763S	C0300-026-2500	70822	C0300-035-1000S	70878S
C0240-032-0810	70668	C0240-038-1750S	70716S	C0240-045-0560	70764	C0300-026-2500S	70822S	C0300-035-1120	70879
C0240-032-0810S	70668S	C0240-038-2000	70717	C0240-045-0560S	70764S	C0300-029-0690	70823	C0300-035-1120S	70879S
C0240-032-0880	70669	C0240-038-2000S	70717S	C0240-045-0620	70765	C0300-029-0690S	70823S	C0300-035-1250	70880
C0240-032-0880S	70669S	C0240-038-2250	70718	C0240-045-0620S	70765S	C0300-030-0440	70826	C0300-035-1250S	70880S
C0240-032-0940	70670	C0240-038-2250S	70718S	C0240-045-0690	70766	C0300-030-0440S	70826S	C0300-035-1380	70881
C0240-032-0940S	70670S	C0240-038-2500	70719	C0240-045-0690S	70766S	C0300-030-0500	70827	C0300-035-1380S	70881S
C0240-032-1000	70671	C0240-038-2500S	70719S	C0240-045-0750	70767	C0300-030-0500S	70827S	C0300-035-1500	70882
C0240-032-1000S	70671S	C0240-040-0310	70720	C0240-045-0750S	70767S	C0300-030-0560	70828	C0300-035-1500S	70882S
C0240-032-1250	70674	C0240-040-0310S	70720S	C0240-045-0810	70768	C0300-030-0560S	70828S	C0300-035-1750	70883
C0240-032-1250S	70674S	C0240-040-0380	70721	C0240-045-0810S	70768S	C0300-030-0620	70829	C0300-035-1750S	70883S
C0240-032-1380	70675	C0240-040-0380S	70721S	C0240-045-0880	70769	C0300-030-0620S	70829S	C0300-035-2000	70884
C0240-032-1380S	70675S	C0240-040-0440	70722	C0240-045-0880S	70769S	C0300-030-0690	70830	C0300-035-2000S	70884S
C0240-032-1500	70676	C0240-040-0440S	70722S	C0240-045-1000	70771	C0300-030-0690S	70830S	C0300-035-2250	70885
C0240-032-1500S	70676S	C0240-040-0500	70723	C0240-045-1000S	70771S	C0300-030-0750	70831	C0300-035-2250S	70885S
C0240-032-1750	70677	C0240-040-0500S	70723S	C0240-045-1250	70773	C0300-030-0750S	70831S	C0300-035-2500	70886
C0240-032-1750S	70677S	C0240-040-0560	70724	C0240-045-1250S	70773S	C0300-030-0810	70832	C0300-035-2500S	70886S
C0240-032-2000	70678	C0240-040-0560S	70724S	C0240-045-1500	70774	C0300-030-0810S	70832S	C0300-038-0380	70887
C0240-035-0310	70679	C0240-040-0620	70725	C0240-045-1500S	70774S	C0300-030-0880	70833	C0300-038-0380S	70887S
C0240-035-0310S	70679S	C0240-040-0620S	70725S	C0240-045-1750	70775	C0300-030-0880S	70833S	C0300-038-0440	70888
C0240-035-0380	70680	C0240-040-0690S	70726	C0240-045-1750S	70775S	C0300-030-0940	70834	C0300-038-0440S	70888S
C0240-035-0380S	70680S	C0240-040-0750	70727	C0240-045-2000	70776	C0300-030-0940S	70834S	C0300-038-0500	70889
C0240-035-0440	70681	C0240-040-0750S	70727S	C0240-045-2000S	70776S	C0300-030-1000	70835	C0300-038-0500S	70889S
C0240-035-0440S	70681S	C0240-040-0810	70728	C0240-045-2250	70777	C0300-030-1000S	70835S	C0300-038-0560	70890
C0240-035-0500	70682	C0240-040-0810S	70728S	C0240-045-2500	70778	C0300-030-1250	70838	C0300-038-0560S	70890S
C0240-035-0500S	70682S	C0240-040-0880	70729	C0240-045-2500S	70778S	C0300-030-1500	70841	C0300-038-0620S	70891S
C0240-035-0560	70683	C0240-040-0880S	70729S	C0300-022-0380	70779	C0300-030-1500S	70841S	C0300-038-0690	70892
C0240-035-0560S	70683S	C0240-040-0940	70730	C0300-022-0380S	70779S	C0300-030-1750	70842	C0300-038-0690S	70892S
C0240-035-0620	70684	C0240-040-0940S	70730S	C0300-022-0440	70780	C0300-030-1750S	70842S	C0300-038-0750	70893
C0240-035-0620S	70684S	C0240-040-1000	70731	C0300-022-0440S	70780S	C0300-030-2000	70843	C0300-038-0750S	70893S
C0240-035-0690	70685	C0240-040-1000S	70731S	C0300-022-0500	70781	C0300-030-2000S	70843S	C0300-038-0810	70894
C0240-035-0690S	70685S	C0240-040-1120	70732	C0300-022-0500S	70781S	C0300-030-2250	70844	C0300-038-0810S	70894S
C0240-035-0750	70686	C0240-040-1120S	70732S	C0300-022-0560	70782	C0300-030-2250S	70844S	C0300-038-0880	70895
C0240-035-0750S	70686S	C0240-040-1250	70733	C0300-022-0560S	70782S	C0300-030-2500	70845	C0300-038-0880S	70895S
C0240-035-0810	70687	C0240-040-1250S	70733S	C0300-022-0620	70783	C0300-030-2500S	70845S	C0300-038-0940	70896
C0240-035-0810S	70687S	C0240-040-1380	70734	C0300-022-0620S	70783S	C0300-032-0440	70848	C0300-038-0940S	70896S
C0240-035-0880	70688	C0240-040-1380S	70734S	C0300-022-0690	70784	C0300-032-0440S	70848S	C0300-038-1000	70897
C0240-035-0880S	70688S	C0240-040-1500	70735	C0300-022-0690S	70784S	C0300-032-0500	70849	C0300-038-1000S	70897S
C0240-035-0940	70689	C0240-040-1500S	70735S	C0300-022-0750	70785	C0300-032-0500S	70849S	C0300-038-1120	70898
C0240-035-0940S	70689S	C0240-040-1750	70736	C0300-022-0750S	70785S	C0300-032-0560	70850	C0300-038-1120S	70898S
C0240-035-1000	70690	C0240-040-1750S	70736S	C0300-022-0810	70786	C0300-032-0560S	70850S	C0300-038-1250	70899
C0240-035-1000S	70690S	C0240-040-2000	70737	C0300-022-0810S	70786S	C0300-			

Associated Spring / Century Spring Part Numbers



Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.
C0300-040-0440S	70907S	C0300-045-0880	70952	C0300-049-1250S	70996S	C0360-029-0750	71051	C0360-035-2000S	71098S
C0300-040-0500	70908	C0300-045-0880S	70952S	C0300-049-1380	70997	C0360-029-0750S	71051S	C0360-035-2250	71099
C0300-040-0500S	70908S	C0300-045-0940	70953	C0300-049-1380S	70997S	C0360-029-0810	71052	C0360-035-2250S	71099S
C0300-040-0560	70909	C0300-045-0940S	70953S	C0300-049-1500	70998	C0360-029-0810S	71052S	C0360-035-2500	71100
C0300-040-0560S	70909S	C0300-045-1000	70954	C0300-049-1500S	70998S	C0360-029-0880	71053	C0360-035-2500S	71100S
C0300-040-0620	70910	C0300-045-1000S	70954S	C0300-049-1750	70999	C0360-029-0880S	71053S	C0360-038-0440	71101
C0300-040-0620S	70910S	C0300-045-1120	70955	C0300-049-1750S	70999S	C0360-029-1000	71055	C0360-038-0440S	71101S
C0300-040-0690	70911	C0300-045-1120S	70955S	C0300-049-2000	71000	C0360-029-1000S	71055S	C0360-038-0500	71102
C0300-040-0690S	70911S	C0300-045-1250	70956	C0300-049-2000S	71000S	C0360-029-1120	71056	C0360-038-0500S	71102S
C0300-040-0750	70912	C0300-045-1250S	70956S	C0300-049-2250	71001	C0360-029-1120S	71056S	C0360-038-0560	71103
C0300-040-0750S	70912S	C0300-045-1380	70957	C0300-049-2250S	71001S	C0360-029-1250	71057	C0360-038-0560S	71103S
C0300-040-0810	70913	C0300-045-1380S	70957S	C0300-049-2500	71002	C0360-029-1250S	71057S	C0360-038-0620	71104
C0300-040-0810S	70913S	C0300-045-1500	70958	C0300-049-2500S	71002S	C0360-029-1380	71058	C0360-038-0620S	71104S
C0300-040-0880	70914	C0300-045-1500S	70958S	C0300-049-2750	71003	C0360-029-1380S	71058S	C0360-038-0690	71105
C0300-040-0880S	70914S	C0300-045-1750	70959	C0300-049-2750S	71003S	C0360-029-1500	71059	C0360-038-0690S	71105S
C0300-040-0940	70915	C0300-045-1750S	70959S	C0300-049-3000	71004	C0360-029-1500S	71059S	C0360-038-0750	71106
C0300-040-0940S	70915S	C0300-045-2000	70960	C0300-049-3000S	71004S	C0360-029-1750	71060	C0360-038-0750S	71106S
C0300-040-1000	70916	C0300-045-2000S	70960S	C0300-051-0380	71005	C0360-029-1750S	71060S	C0360-038-0810	71107
C0300-040-1000S	70916S	C0300-045-2250	70961	C0300-051-0380S	71005S	C0360-029-2000	71061	C0360-038-0810S	71107S
C0300-040-1120	70917	C0300-045-2250S	70961S	C0300-051-0440	71006	C0360-029-2000S	71061S	C0360-038-0880	71108
C0300-040-1120S	70917S	C0300-045-2500	70962	C0300-051-0440S	71006S	C0360-032-0380	71064	C0360-038-0880S	71108S
C0300-040-1250	70918	C0300-045-2500S	70962S	C0300-051-0500	71007	C0360-032-0380S	71064S	C0360-038-0940	71109
C0300-040-1250S	70918S	C0300-047-0380	70963	C0300-051-0500S	71007S	C0360-032-0440	71065	C0360-038-0940S	71109S
C0300-040-1380	70919	C0300-047-0380S	70963S	C0300-051-0560	71008	C0360-032-0440S	71065S	C0360-038-1000	71110
C0300-040-1380S	70919S	C0300-047-0440	70964	C0300-051-0560S	71008S	C0360-032-0500	71066	C0360-038-1000S	71110S
C0300-040-1500	70920	C0300-047-0440S	70964S	C0300-051-0620	71009	C0360-032-0500S	71066S	C0360-038-1120	71111
C0300-040-1500S	70920S	C0300-047-0500	70965	C0300-051-0620S	71009S	C0360-032-0560	71067	C0360-038-1120S	71111S
C0300-040-1750	70921	C0300-047-0500S	70965S	C0300-051-0750	71011	C0360-032-0560S	71067S	C0360-038-1250	71112
C0300-040-1750S	70921S	C0300-047-0560	70966	C0300-051-0750S	71011S	C0360-032-0620	71068	C0360-038-1250S	71112S
C0300-040-2000	70922	C0300-047-0560S	70966S	C0300-051-0810	71012	C0360-032-0620S	71068S	C0360-038-1380	71113
C0300-040-2000S	70922S	C0300-047-0620	70967	C0300-051-0810S	71012S	C0360-032-0690	71069	C0360-038-1380S	71113S
C0300-040-2250	70923	C0300-047-0620S	70967S	C0300-051-0880	71013	C0360-032-0690S	71069S	C0360-038-1500	71114
C0300-040-2250S	70923S	C0300-047-0690	70968	C0300-051-0880S	71013S	C0360-032-0750	71070	C0360-038-1500S	71114S
C0300-040-2500	70924	C0300-047-0690S	70968S	C0300-051-0940	71014	C0360-032-0750S	71070S	C0360-038-1750	71115
C0300-040-2500S	70924S	C0300-047-0750	70969	C0300-051-0940S	71014S	C0360-032-0810	71071	C0360-038-1750S	71115S
C0300-042-0380	70925	C0300-047-0750S	70969S	C0300-051-1000	71015	C0360-032-0810S	71071S	C0360-038-2000	71116
C0300-042-0380S	70925S	C0300-047-0810	70970	C0300-051-1000S	71015S	C0360-032-0880	71072	C0360-038-2000S	71116S
C0300-042-0440	70926	C0300-047-0810S	70970S	C0300-051-1120	71016	C0360-032-0880S	71072S	C0360-038-2250	71117
C0300-042-0440S	70926S	C0300-047-0880	70971	C0300-051-1120S	71016S	C0360-032-0940	71073	C0360-038-2250S	71117S
C0300-042-0500	70927	C0300-047-0880S	70971S	C0300-051-1250	71017	C0360-032-0940S	71073S	C0360-038-2500	71118
C0300-042-0500S	70927S	C0300-047-0940	70972	C0300-051-1250S	71017S	C0360-032-1000	71074	C0360-038-2500S	71118S
C0300-042-0560	70928	C0300-047-0940S	70972S	C0300-051-1380	71018	C0360-032-1000S	71074S	C0360-040-0440	71119
C0300-042-0560S	70928S	C0300-047-1000	70973	C0300-051-1380S	71018S	C0360-032-1120	71075	C0360-040-0440S	71119S
C0300-042-0620	70929	C0300-047-1000S	70973S	C0300-051-1500	71019	C0360-032-1120S	71075S	C0360-040-0500	71120
C0300-042-0620S	70929S	C0300-047-1120	70974	C0300-051-1500S	71019S	C0360-032-1250	71076	C0360-040-0500S	71120S
C0300-042-0690	70930	C0300-047-1120S	70974S	C0300-051-1750	71020	C0360-032-1250S	71076S	C0360-040-0560	71121
C0300-042-0690S	70930S	C0300-047-1250	70975	C0300-051-1750S	71020S	C0360-032-1380	71077	C0360-040-0560S	71121S
C0300-042-0750	70931	C0300-047-1250S	70975S	C0300-051-2000	71021S	C0360-032-1500	71078	C0360-040-0620	71122S
C0300-042-0810	70932	C0300-047-1380S	70976S	C0300-051-2250	71022	C0360-032-1500S	71078S	C0360-040-0690	71123
C0300-042-0810S	70932S	C0300-047-1500	70977	C0300-051-2250S	71022S	C0360-032-1750	71079	C0360-040-0690S	71123S
C0300-042-0880	70933	C0300-047-1500S	70977S	C0300-051-2500	71023	C0360-032-1750S	71079S	C0360-040-0750	71124
C0300-042-0880S	70933S	C0300-047-1750	70978	C0300-051-2500S	71023S	C0360-032-2000	71080	C0360-040-0750S	71124S
C0300-042-0940	70934	C0300-047-1750S	70978S	C0300-051-2750	71024	C0360-032-2000S	71080S	C0360-040-0810	71125
C0300-042-0940S	70934S	C0300-047-2000	70979	C0300-051-2750S	71024S	C0360-032-2250	71081	C0360-040-0810S	71125S
C0300-042-1000	70935	C0300-047-2250	70979S	C0300-051-3000	71025	C0360-032-2500	71082	C0360-040-0880	71126
C0300-042-1000S	70935S	C0300-047-3000	70980	C0300-051-3000S	71025S	C0360-032-2500S	71082S	C0360-040-0880S	71126S
C0300-042-1120	70936	C0300-047-2250S	70980S	C0360-026-0500	71028	C0360-032-2500S	71082S	C0360-040-0940	71127
C0300-042-1120S	70936S	C0300-047-2500	70981	C0360-026-0500S	71028S	C0360-035-0440	71083	C0360-040-0940S	71127S
C0300-042-1250	70937	C0300-047-2500S	70981S	C0360-026-0560	71029	C0360-035-0440S	71083S	C0360-040-1000	71128
C0300-042-1250S	70937S	C0300-047-2750	70982	C0360-026-0560S	71029S	C0360-035-0500	71084	C0360-040-1000S	71128S
C0300-042-1380	70938	C0300-047-2750S	70982S	C0360-026-0620	71030	C0360-035-0500S	71084S	C0360-040-1120	71129
C0300-042-1380S	70938S	C0300-047-3000	70983	C0360-026-0620S	71030S	C0360-035-0560	71085	C0360-040-1120S	71129S
C0300-042-1500	70939	C0300-047-3000S	70983S	C0360-026-0690	71031	C0360-035-0560S	71085S	C0360-040-1250	71130
C0300-042-1500S	70939S	C0300-049-0380	70984	C0360-026-0690S	71031S	C0360-035-0620	71086	C0360-040-1250S	71130S
C0300-042-1750	70940	C0300-049-0380S	70984S	C0360-026-0750	71032	C0360-035-0620S	71086S	C0360-040-1380	71131
C0300-042-1750S	70940S	C0300-049-0440	70985	C0360-026-0750S	71032S	C0360-035-0690	71087	C0360-040-1380S	71131S
C0300-042-2000	70941	C0300-049-0440S	70985S	C0360-026-0810	71033	C0360-035-0690S	71087S	C0360-040-1500	71132
C0300-042-2000S	70941S	C0300-049-0500	70986	C0360-026-0810S	71033S	C0360-035-0750	71088	C0360-040-1500S	71132S
C0300-042-2250	70942	C0300-049-0500S	70986S	C0360-026-0880	71034	C0360-035-0750S	71088S	C0360-040-1750	71133
C0300-042-2250S	70942S	C0300-049-0560	70987	C0360-026-0880S	71034S	C0360-035-0810	71089	C0360-040-1750S	71133S
C0300-042-2500	70943	C0300-049-0560S	70987S	C0360-026-0940	71035	C0360-035-0810S	71089S	C0360-040-2000	71134
C0300-042-2500S	70943S	C0300-049-0620	70988	C0360-026-0940S	71035S	C0360-035-0880	71090	C0360-040-2000S	71134S
C0300-045-0380	70944	C0300-049-0620S	70988S	C0360-026-1000	71036	C0360-035-0880S	71090S	C0360-040-2250	71135
C0300-045-0380S	70944S	C							

Associated Spring / Century Spring Part Numbers

Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.
C0360-042-0810	71143	C0360-047-1500S	71187S	C0360-051-1750	71232	C0360-059-2000S	71276S	C0420-038-0625	71329
C0360-042-0810S	71143S	C0360-047-1750	71188	C0360-051-1750S	71232S	C0360-059-2250	71277	C0420-038-0625S	71329S
C0360-042-0880	71144	C0360-047-1750S	71188S	C0360-051-2000	71233	C0360-059-2250S	71277S	C0420-038-0750	71330
C0360-042-0880S	71144S	C0360-047-2000	71189	C0360-051-2000S	71233S	C0360-059-2500	71278	C0420-038-0750S	71330S
C0360-042-0940	71145	C0360-047-2000S	71189S	C0360-051-2250	71234	C0360-059-2500S	71278S	C0420-038-0880	71331
C0360-042-0940S	71145S	C0360-047-2250	71190	C0360-051-2250S	71234S	C0360-059-2750	71279	C0420-038-0880S	71331S
C0360-042-1000	71146	C0360-047-2250S	71190S	C0360-051-2500	71235	C0360-059-2750S	71279S	C0420-038-1000	71332
C0360-042-1000S	71146S	C0360-047-2500	71191	C0360-051-2500S	71235S	C0360-059-3000	71280	C0420-038-1000S	71332S
C0360-042-1120	71147	C0360-047-2500S	71191S	C0360-051-2750	71236	C0360-059-3000S	71280S	C0420-038-1250	71333
C0360-042-1120S	71147S	C0360-047-2750	71192	C0360-051-2750S	71236S	C0360-059-3250	71281	C0420-038-1250S	71333S
C0360-042-1250	71148	C0360-047-2750S	71192S	C0360-051-3000	71237	C0360-059-3250S	71281S	C0420-038-1500	71334
C0360-042-1250S	71148S	C0360-047-3000	71193	C0360-051-3000S	71237S	C0360-059-3500	71282	C0420-038-1500S	71334S
C0360-042-1380	71149	C0360-047-3000S	71193S	C0360-051-3250	71238	C0360-059-3500S	71282S	C0420-038-1750	71335
C0360-042-1380S	71149S	C0360-047-3250	71194	C0360-051-3250S	71238S	C0390-043-0500	71283	C0420-038-1750S	71335S
C0360-042-1500	71150	C0360-047-3250S	71194S	C0360-051-3500	71239	C0390-043-0500S	71283S	C0420-038-2000	71336
C0360-042-1500S	71150S	C0360-047-3500	71195	C0360-051-3500S	71239S	C0390-043-0560	71284	C0420-038-2000S	71336S
C0360-042-1750	71151	C0360-047-3500S	71195S	C0360-055-0440	71240	C0390-043-0560S	71284S	C0420-038-2250	71337
C0360-042-1750S	71151S	C0360-049-0440	71196	C0360-055-0440S	71240S	C0390-043-0620	71285	C0420-038-2250S	71337S
C0360-042-2000	71152	C0360-049-0440S	71196S	C0360-055-0500	71241	C0390-043-0620S	71285S	C0420-038-2500	71338
C0360-042-2000S	71152S	C0360-049-0500	71197	C0360-055-0500S	71241S	C0390-043-0690	71286	C0420-038-2500S	71338S
C0360-042-2250	71153	C0360-049-0500S	71197S	C0360-055-0560	71242	C0390-043-0690S	71286S	C0420-042-0500	71339
C0360-042-2250S	71153S	C0360-049-0560	71198	C0360-055-0560S	71242S	C0390-043-0750	71287	C0420-042-0500S	71339S
C0360-042-2500	71154	C0360-049-0560S	71198S	C0360-055-0620	71243	C0390-043-0750S	71287S	C0420-042-0560	71340
C0360-042-2500S	71154S	C0360-049-0620	71199	C0360-055-0620S	71243S	C0390-043-0810	71288	C0420-042-0560S	71340S
C0360-045-0440	71155	C0360-049-0620S	71199S	C0360-055-0690	71244	C0390-043-0810S	71288S	C0420-042-0625	71341
C0360-045-0440S	71155S	C0360-049-0690	71200	C0360-055-0690S	71244S	C0390-043-0880	71289	C0420-042-0625S	71341S
C0360-045-0500	71156	C0360-049-0690S	71200S	C0360-055-0750	71245	C0390-043-0880S	71289S	C0420-042-0750	71342
C0360-045-0500S	71156S	C0360-049-0750	71201	C0360-055-0750S	71245S	C0390-043-0940	71290	C0420-042-0750S	71342S
C0360-045-0560	71157	C0360-049-0750S	71201S	C0360-055-0810	71246	C0390-043-0940S	71290S	C0420-042-0880	71343
C0360-045-0560S	71157S	C0360-049-0810	71202	C0360-055-0810S	71246S	C0390-043-1000	71291	C0420-042-0880S	71343S
C0360-045-0620	71158	C0360-049-0810S	71202S	C0360-055-0880	71247	C0390-043-1000S	71291S	C0420-042-1000	71344
C0360-045-0620S	71158S	C0360-049-0880	71203	C0360-055-0880S	71247S	C0390-043-1120	71292	C0420-042-1000S	71344S
C0360-045-0690	71159	C0360-049-0880S	71203S	C0360-055-0940	71248	C0390-043-1120S	71292S	C0420-042-1250	71345
C0360-045-0690S	71159S	C0360-049-0940	71204	C0360-055-0940S	71248S	C0390-043-1250	71293	C0420-042-1250S	71345S
C0360-045-0750	71160	C0360-049-0940S	71204S	C0360-055-1000	71249	C0390-043-1250S	71293S	C0420-042-1500	71346
C0360-045-0750S	71160S	C0360-049-1000	71205	C0360-055-1000S	71249S	C0390-043-1380	71294	C0420-042-1750	71347
C0360-045-0810	71161	C0360-049-1000S	71205S	C0360-055-1120	71250	C0390-043-1380S	71294S	C0420-042-1750S	71347S
C0360-045-0810S	71161S	C0360-049-1120	71206	C0360-055-1120S	71250S	C0390-043-1500	71295	C0420-042-1750S	71347S
C0360-045-0880	71162	C0360-049-1120S	71206S	C0360-055-1250	71251	C0390-043-1500S	71295S	C0420-042-2000	71348
C0360-045-0880S	71162S	C0360-049-1250	71207	C0360-055-1250S	71251S	C0390-043-1750	71296	C0420-042-2000S	71348S
C0360-045-0940	71163	C0360-049-1250S	71207S	C0360-055-1380	71252	C0390-043-1750S	71296S	C0420-042-2250	71349
C0360-045-0940S	71163S	C0360-049-1380	71208	C0360-055-1380S	71252S	C0390-043-2000	71297	C0420-042-2250S	71349S
C0360-045-1000	71164	C0360-049-1380S	71208S	C0360-055-1500	71253	C0390-043-2000S	71297S	C0420-042-2500	71350
C0360-045-1000S	71164S	C0360-049-1500	71209	C0360-055-1500S	71253S	C0390-047-0500	71298	C0420-042-2500S	71350S
C0360-045-1120	71165	C0360-049-1500S	71209S	C0360-055-1750	71254	C0390-047-0500S	71298S	C0420-045-0500	71351
C0360-045-1120S	71165S	C0360-049-1750	71210	C0360-055-1750S	71254S	C0390-047-0560	71299	C0420-045-0500S	71351S
C0360-045-1250	71166	C0360-049-1750S	71210S	C0360-055-2000	71255	C0390-047-0560S	71299S	C0420-045-0625	71352
C0360-045-1250S	71166S	C0360-049-2000	71211	C0360-055-2000S	71255S	C0390-047-0620	71300	C0420-045-0625S	71352S
C0360-045-1380	71167	C0360-049-2000S	71211S	C0360-055-2250	71256	C0390-047-0620S	71300S	C0420-045-0750	71353
C0360-045-1380S	71167S	C0360-049-2250	71212	C0360-055-2250S	71256S	C0390-047-0690	71301	C0420-045-0750S	71353S
C0360-045-1500	71168	C0360-049-2250S	71212S	C0360-055-2500	71257	C0390-047-0690S	71301S	C0420-045-0880	71354
C0360-045-1500S	71168S	C0360-049-2500	71213	C0360-055-2500S	71257S	C0390-047-0810	71303	C0420-045-0880S	71354S
C0360-045-1750	71169	C0360-049-2500S	71213S	C0360-055-2750	71258	C0390-047-0810S	71303S	C0420-045-1000	71355
C0360-045-1750S	71169S	C0360-049-2750	71214	C0360-055-2750S	71258S	C0390-047-0940	71305	C0420-045-1000S	71355S
C0360-045-2000	71170	C0360-049-2750S	71214S	C0360-055-3000	71259	C0390-047-0940S	71305S	C0420-045-1250	71356
C0360-045-2250	71171	C0360-049-3000	71215	C0360-055-3250	71260	C0390-047-1000	71306	C0420-045-1250S	71356S
C0360-045-2250S	71171S	C0360-049-3250	71216	C0360-055-3250S	71260S	C0390-047-1120	71307	C0420-045-1500	71357
C0360-045-2500	71172	C0360-049-3250S	71216S	C0360-055-3500	71261	C0390-047-1120S	71307S	C0420-045-1750	71358
C0360-045-2500S	71172S	C0360-049-3500	71217	C0360-055-3500S	71261S	C0390-047-1250	71308	C0420-045-1750S	71358S
C0360-045-2750S	71173	C0360-051-0440	71218	C0360-059-0440S	71262S	C0390-047-1380	71309	C0420-045-2000S	71359S
C0360-047-0440	71174	C0360-051-0440S	71218S	C0360-059-0500	71263	C0390-047-1380S	71309S	C0420-045-2250	71360
C0360-047-0440S	71174S	C0360-051-0500	71219	C0360-059-0500S	71263S	C0390-047-1500	71310	C0420-045-2250S	71360S
C0360-047-0500	71175	C0360-051-0500S	71219S	C0360-059-0560	71264	C0390-047-1500S	71310S	C0420-045-2500	71361
C0360-047-0500S	71175S	C0360-051-0560	71220	C0360-059-0560S	71264S	C0390-047-1750	71311	C0420-045-2500S	71361S
C0360-047-0560	71176	C0360-051-0600S	71221	C0360-059-0620	71265	C0390-047-1750S	71311S	C0420-048-0500	71371
C0360-047-0620	71177	C0360-051-0620S	71221S	C0360-059-0690	71266	C0390-047-2000S	71312S	C0420-048-0750	71374
C0360-047-0620S	71177S	C0360-051-0690	71222	C0360-059-0690S	71266S	C0420-035-0500	71313	C0420-048-0750S	71374S
C0360-047-0690	71178	C0360-051-0690S	71222S	C0360-059-0750	71267	C0420-035-0500S	71313S	C0420-048-1000	71377
C0360-047-0690S	71178S	C0360-051-0750	71223	C0360-059-0750S	71267S	C0420-035-0620	71314	C0420-048-1000S	71377S
C0360-047-0750	71179	C0360-051-0750S	71223S	C0360-059-0810	71268	C0420-035-0620S	71314S	C0420-048-1250	71378
C0360-047-0810	71180	C0360-051-0810S	71224S	C0360-059-0880	71269	C0420-035-0750S	71315S	C0420-048-1500	71379
C0360-047-0810S	71180S	C0360-051-0880	71225	C0360-059-0880S	71269S	C0420-035-0880	71316	C0420-048-1500S	71379S
C0360-047-0880	71181	C0360-051-0880S	71225S	C0360-059-0940	71270	C0420-035-088			

Associated Spring / Century Spring Part Numbers



Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.
C0420-051-1000S	71390S	C0420-067-2250	71436	C0480-038-2000S	71485S	C0480-055-0625	71533	C0480-067-1750S	71582S
C0420-051-1250	71391	C0420-067-2250S	71436S	C0480-038-2250	71486	C0480-055-0625S	71533S	C0480-067-2000	71583
C0420-051-1250S	71391S	C0420-067-2500	71437	C0480-038-2250S	71486S	C0480-055-0750	71534	C0480-067-2250	71583S
C0420-051-1500	71392	C0420-067-2500S	71437S	C0480-038-2500	71487	C0480-055-0750S	71534S	C0480-067-2250S	71584
C0420-051-1500S	71392S	C0420-072-1000	71438	C0480-038-2500S	71487S	C0480-055-0880	71535	C0480-067-2250S	71584S
C0420-051-2000	71394	C0420-072-1000S	71438S	C0480-038-2750	71488	C0480-055-0880S	71535S	C0480-067-2500	71585
C0420-051-2000S	71394S	C0420-072-1250	71439	C0480-038-2750S	71488S	C0480-055-1000	71536	C0480-067-2500S	71585S
C0420-051-2250	71395	C0420-072-1250S	71439S	C0480-038-3000	71489	C0480-055-1000S	71536S	C0480-067-2750	71586
C0420-051-2250S	71395S	C0420-072-1500	71440	C0480-038-3000S	71489S	C0480-055-1250	71537	C0480-067-2750S	71586S
C0420-051-2500	71396	C0420-072-1500S	71440S	C0480-042-0500	71490	C0480-055-1250S	71537S	C0480-067-3000	71587
C0420-051-2500S	71396S	C0420-072-1750	71441	C0480-042-0500S	71490S	C0480-055-1500	71538	C0480-067-3000S	71587S
C0420-055-0500	71397	C0420-072-1750S	71441S	C0480-042-0625	71491	C0480-055-1500S	71538S	C0480-072-0500	71588
C0420-055-0500S	71397S	C0420-072-2000	71442	C0480-042-0625S	71491S	C0480-055-1750	71540	C0480-072-0500S	71588S
C0420-055-0625	71398	C0420-072-2000S	71442S	C0480-042-0750	71492	C0480-055-1750S	71540S	C0480-072-0620	71589
C0420-055-0625S	71398S	C0420-072-2250	71443	C0480-042-0750S	71492S	C0480-055-2000	71541	C0480-072-0620S	71589S
C0420-055-0750	71399	C0420-072-2250S	71443S	C0480-042-0880	71493	C0480-055-2000S	71541S	C0480-072-0750	71590
C0420-055-0750S	71399S	C0420-072-2500	71444	C0480-042-0880S	71493S	C0480-055-2250	71542	C0480-072-0750S	71590S
C0420-055-0880	71400	C0420-072-2500S	71444S	C0480-042-1000	71494	C0480-055-2250S	71542S	C0480-072-0880	71591
C0420-055-0880S	71400S	C0455-039-0500	71445	C0480-042-1000S	71494S	C0480-055-2500	71543	C0480-072-0880S	71591S
C0420-055-1000	71401	C0455-039-0500S	71445S	C0480-042-1250	71495	C0480-055-2500S	71543S	C0480-072-1000	71592
C0420-055-1000S	71401S	C0455-039-0620	71446	C0480-042-1250S	71495S	C0480-055-2750	71544	C0480-072-1000S	71592S
C0420-055-1250	71402	C0455-039-0620S	71446S	C0480-042-1500	71496	C0480-055-2750S	71544S	C0480-072-1250	71593
C0420-055-1250S	71402S	C0455-039-0750	71447	C0480-042-1500S	71496S	C0480-055-3000	71545	C0480-072-1250S	71593S
C0420-055-1500	71403	C0455-039-0750S	71447S	C0480-042-1750	71498	C0480-055-3000S	71545S	C0480-072-1500	71594
C0420-055-1500S	71403S	C0455-039-0880	71448	C0480-042-1750S	71498S	C0480-059-0500	71546	C0480-072-1500S	71594S
C0420-055-1750	71404	C0455-039-0880S	71448S	C0480-042-2000	71499	C0480-059-0500S	71546S	C0480-072-1750	71595
C0420-055-1750S	71404S	C0455-039-1000	71449	C0480-042-2000S	71499S	C0480-059-0620	71547	C0480-072-1750S	71595S
C0420-055-2000	71405	C0455-039-1000S	71449S	C0480-042-2250	71500	C0480-059-0620S	71547S	C0480-072-2000	71596
C0420-055-2000S	71405S	C0455-039-1250	71450	C0480-042-2250S	71500S	C0480-059-0750	71548	C0480-072-2000S	71596S
C0420-055-2250	71406	C0455-039-1250S	71450S	C0480-042-2500	71501	C0480-059-0750S	71548S	C0480-072-2250	71597
C0420-055-2250S	71406S	C0455-039-1500	71451	C0480-042-2500S	71501S	C0480-059-1000	71550	C0480-072-2250S	71597S
C0420-055-2500	71407	C0455-039-1500S	71451S	C0480-042-2750	71502	C0480-059-1000S	71550S	C0480-072-2500	71598
C0420-055-2500S	71407S	C0455-039-1750	71452	C0480-042-2750S	71502S	C0480-059-1250	71551	C0480-072-2500S	71598S
C0420-059-0500	71408	C0455-039-1750S	71452S	C0480-042-3000	71503	C0480-059-1250S	71551S	C0480-072-2750	71599
C0420-059-0500S	71408S	C0455-046-0500	71455	C0480-042-3000S	71503S	C0480-059-1500	71552	C0480-072-2750S	71599S
C0420-059-0625	71409	C0455-046-0500S	71455S	C0480-045-0500	71504	C0480-059-1500S	71552S	C0480-072-3000	71600
C0420-059-0750	71410	C0455-046-0620	71456	C0480-045-0500S	71504S	C0480-059-1750	71554	C0480-072-3000S	71600S
C0420-059-0750S	71410S	C0455-046-0620S	71456S	C0480-045-0625	71505	C0480-059-1750S	71554S	C0480-072-3250	71601
C0420-059-0880	71411	C0455-046-0750	71457	C0480-045-0625S	71505S	C0480-059-2000	71555	C0480-072-3250S	71601S
C0420-059-0880S	71411S	C0455-046-0750S	71457S	C0480-045-0750	71506	C0480-059-2000S	71555S	C0480-072-3500	71602
C0420-059-1000	71412	C0455-046-0880	71458	C0480-045-0750S	71506S	C0480-059-2250	71556	C0480-072-3500S	71602S
C0420-059-1000S	71412S	C0455-046-0880S	71458S	C0480-045-0880	71507	C0480-059-2250S	71556S	C0480-074-0500	71603
C0420-059-1250	71413	C0455-046-1000	71459	C0480-045-1000	71508	C0480-059-2500S	71557	C0480-074-0500S	71603S
C0420-059-1250S	71413S	C0455-046-1250	71460	C0480-045-1000S	71508S	C0480-059-2750	71558	C0480-074-0620	71604
C0420-059-1500	71414	C0455-046-1250S	71460S	C0480-045-1250	71509	C0480-059-2750S	71558S	C0480-074-0620S	71604S
C0420-059-1500S	71414S	C0455-046-1500	71461	C0480-045-1250S	71509S	C0480-059-3000	71559	C0480-074-0750	71605
C0420-059-1750	71415	C0455-046-1500S	71461S	C0480-045-1500	71510	C0480-059-3000S	71559S	C0480-074-0750S	71605S
C0420-059-1750S	71415S	C0455-046-1750	71462	C0480-045-1500S	71510S	C0480-063-0500	71560	C0480-074-0880S	71606S
C0420-059-2000	71416	C0455-046-1750S	71462S	C0480-045-1750	71512	C0480-063-0500S	71560S	C0480-074-1000	71607
C0420-059-2000S	71416S	C0455-046-2000	71465	C0480-045-1750S	71512S	C0480-063-0625	71561	C0480-074-1000S	71607S
C0420-059-2250	71417	C0455-035-0500	71465S	C0480-045-2000	71513	C0480-063-0625S	71561S	C0480-074-1250	71608
C0420-059-2250S	71417S	C0480-035-0620	71466	C0480-045-2000S	71513S	C0480-063-0750	71562	C0480-074-1250S	71608S
C0420-059-2500	71418	C0480-035-0620S	71466S	C0480-045-2250	71514	C0480-063-0750S	71562S	C0480-074-1500	71609
C0420-059-2500S	71418S	C0480-035-0750	71467	C0480-045-2250S	71514S	C0480-063-0880	71563	C0480-074-1500S	71609S
C0420-063-0500	71419	C0480-035-0750S	71467S	C0480-045-2500	71515	C0480-063-0880S	71563S	C0480-074-1750	71610
C0420-063-0500S	71419S	C0480-035-0880	71468	C0480-045-2500S	71515S	C0480-063-1000	71564	C0480-074-1750S	71610S
C0420-063-0620	71420	C0480-035-0880S	71468S	C0480-045-2750	71516	C0480-063-1000S	71564S	C0480-074-2000	71611
C0420-063-0620S	71420S	C0480-035-1000	71469	C0480-045-2750S	71516S	C0480-063-1250	71565	C0480-074-2250	71611S
C0420-063-0750	71421	C0480-035-1000S	71469S	C0480-045-3000	71517	C0480-063-1250S	71565S	C0480-074-2250S	71612
C0420-063-0750S	71421S	C0480-035-1250	71470	C0480-045-3000S	71517S	C0480-063-1380S	71565S	C0480-074-2500	71612S
C0420-063-0880	71422	C0480-035-1250S	71470S	C0480-045-3500	71518	C0480-063-1380S	71566S	C0480-074-2500S	71613S
C0420-063-0880S	71422S	C0480-035-1500	71471	C0480-051-0500	71518S	C0480-063-1500	71567	C0480-074-2750	71614
C0420-063-1000	71423	C0480-035-1500S	71471S	C0480-051-0620	71519	C0480-063-1500S	71567S	C0480-074-2750S	71614S
C0420-063-1000S	71423S	C0480-035-1750	71472	C0480-051-0620S	71519S	C0480-063-1750	71569	C0480-074-3000	71615
C0420-063-1250	71424	C0480-035-1750S	71472S	C0480-051-0750	71520	C0480-063-1750S	71569S	C0480-074-3000S	71615S
C0420-063-1250S	71424S	C0480-035-2000	71473	C0480-051-0750S	71520S	C0480-063-2000	71570	C0480-074-3250	71616
C0420-063-1500	71425	C0480-035-2000S	71473S	C0480-051-0880S	71521	C0480-063-2250	71571	C0480-074-3250S	71616S
C0420-063-2250	71425S	C0480-035-2500	71474	C0480-051-0880S	71521S	C0480-063-2250S	71571S	C0480-074-3500	71617
C0420-063-2250S	71426	C0480-035-2500S	71474S	C0480-051-1000	71522	C0480-063-2250S	71571S	C0480-074-3500S	71617S
C0420-063-2750	71426S	C0480-035-3000	71475	C0480-051-1000S	71522S	C0480-063-2500	71572	C0480-074-3500S	71617S
C0420-063-3000	71427	C0480-035-3000S	71475S	C0480-051-1250	71523	C0480-063-2500S	71572S	C0480-081-0500	71618
C0420-063-3000S	71427S	C0480-035-3000S	71476	C0480-051-1250S	71523S	C0480-063-2750	71573	C0480-081-0500S	71618S
C0420-063-3250	71428	C0480-035-3000S	71476S	C0480-051-1500	71524	C0480-063-2750S	71573S	C0480-081-0620	71619
C0420-063-3250S	71428S								

Associated Spring / Century Spring Part Numbers

Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.
C0480-081-2250	71627	C0600-059-0750S	71754S	C0600-072-2500	71800	C0600-092-2750S	71844S	C0720-063-0880	71953
C0480-081-2250S	71627S	C0600-059-0880	71755	C0600-072-2500S	71800S	C0600-092-3000S	71845	C0720-063-0880S	71953S
C0480-081-2500	71628	C0600-059-0880S	71755S	C0600-072-2750	71801	C0600-092-3250S	71845S	C0720-063-1000	71954
C0480-081-2500S	71628S	C0600-059-1000	71756	C0600-072-3000	71802	C0600-092-3250S	71846	C0720-063-1000S	71954S
C0480-081-2750	71629	C0600-059-1000S	71756S	C0600-072-3000S	71802S	C0600-092-3500	71847	C0720-063-1250	71955
C0480-081-2750S	71629S	C0600-059-1250	71757	C0600-081-0620	71803	C0600-092-3500S	71847S	C0720-063-1250S	71955S
C0480-081-3000	71630	C0600-059-1250S	71757S	C0600-081-0620S	71803S	C0600-092-3750	71848	C0720-063-1500	71956
C0480-081-3000S	71630S	C0600-059-1500	71758	C0600-081-0750	71804	C0600-092-3750S	71848S	C0720-063-1500S	71956S
C0480-081-3250	71631	C0600-059-1500S	71758S	C0600-081-0750S	71804S	C0600-092-4000	71849	C0720-063-1750	71957
C0480-081-3250S	71631S	C0600-059-1750	71759	C0600-081-0880	71805	C0600-092-4000S	71849S	C0720-063-1750S	71957S
C0480-081-3500	71632	C0600-059-1750S	71759S	C0600-081-0880S	71805S	C0600-098-0750	71850	C0720-063-2000	71958
C0480-081-3500S	71632S	C0600-059-2000	71760	C0600-081-1000	71806	C0600-098-0750S	71850S	C0720-063-2000S	71958S
C0600-045-0500	71711	C0600-059-2000S	71760S	C0600-081-1000S	71806S	C0600-098-0880	71851	C0720-063-2250	71959
C0600-045-0500S	71711S	C0600-059-2250	71761	C0600-081-1250	71807	C0600-098-0880S	71851S	C0720-063-2500	71960
C0600-045-0625	71712	C0600-059-2250S	71761S	C0600-081-1250S	71807S	C0600-098-1000	71852	C0720-063-2500S	71960S
C0600-045-0625S	71712S	C0600-059-2500	71762	C0600-081-1500	71808	C0600-098-1000S	71852S	C0720-063-2750	71961
C0600-045-0750	71713	C0600-059-2500S	71762S	C0600-081-1500S	71808S	C0600-098-1250	71853	C0720-063-2750S	71961S
C0600-045-0750S	71713S	C0600-059-2750	71763	C0600-081-1750	71809	C0600-098-1250S	71853S	C0720-063-3000	71962
C0600-045-0880	71714	C0600-059-2750S	71763S	C0600-081-1750S	71809S	C0600-098-1500	71854	C0720-063-3000S	71962S
C0600-045-1000	71715	C0600-059-3000	71764S	C0600-081-2000	71810	C0600-098-1500S	71854S	C0720-065-0750	71963
C0600-045-1000S	71715S	C0600-063-0625	71765	C0600-081-2000S	71810S	C0600-098-1750	71855	C0720-065-0750S	71963S
C0600-045-1250	71716	C0600-063-0625S	71765S	C0600-081-2250	71811	C0600-098-1750S	71855S	C0720-065-0880	71964
C0600-045-1250S	71716S	C0600-063-0750	71766	C0600-081-2250S	71811S	C0600-098-2000	71856	C0720-065-0880S	71964S
C0600-045-1380	71717	C0600-063-0750S	71766S	C0600-081-2500	71812	C0600-098-2000S	71856S	C0720-065-1000	71965
C0600-045-1380S	71717S	C0600-063-0880	71767	C0600-081-2500S	71812S	C0600-098-2250	71857	C0720-065-1000S	71965S
C0600-045-1500	71718	C0600-063-0880S	71767S	C0600-081-2750	71813	C0600-098-2250S	71857S	C0720-065-1250	71966
C0600-045-1500S	71718S	C0600-063-1000	71768	C0600-081-2750S	71813S	C0600-098-2500	71858	C0720-065-1250S	71966S
C0600-045-2000	71721	C0600-063-1000S	71768S	C0600-081-3000	71814	C0600-098-2500S	71858S	C0720-065-1500	71967
C0600-045-2000S	71721S	C0600-063-1250	71769	C0600-081-3000S	71814S	C0600-098-2750	71859	C0720-065-1500S	71967S
C0600-045-2250	71722	C0600-063-1250S	71769S	C0600-081-3250	71815	C0600-098-2750S	71859S	C0720-065-1750	71968
C0600-045-2250S	71722S	C0600-063-1500	71770	C0600-081-3250S	71815S	C0600-098-3000	71860	C0720-065-1750S	71968S
C0600-045-2500	71723	C0600-063-1500S	71770S	C0600-081-3500	71816	C0600-098-3000S	71860S	C0720-065-2000	71969
C0600-045-2500S	71723S	C0600-063-1750	71771	C0600-081-3500S	71816S	C0600-098-3250	71861	C0720-065-2000S	71969S
C0600-045-2750	71724	C0600-063-1750S	71771S	C0600-081-3750	71817	C0600-098-3250S	71861S	C0720-065-2250	71970
C0600-045-2750S	71724S	C0600-063-2000	71772	C0600-081-3750S	71817S	C0600-098-3500	71862	C0720-065-2250S	71970S
C0600-045-3000	71725	C0600-063-2000S	71772S	C0600-081-4000	71818	C0600-098-3500S	71862S	C0720-065-2500	71971
C0600-045-3500	71728	C0600-063-2250S	71773S	C0600-081-4000S	71818S	C0600-098-3750	71863	C0720-065-2500S	71971S
C0600-045-3500S	71728S	C0600-063-2500	71774	C0600-085-0620	71819	C0600-098-3750S	71863S	C0720-065-2750	71972
C0600-049-0620	71729	C0600-063-2500S	71774S	C0600-085-0620S	71819S	C0600-098-4000	71864	C0720-065-2750S	71972S
C0600-049-0620S	71729S	C0600-063-2750	71775	C0600-085-0750	71820	C0600-098-4000S	71864S	C0720-065-3000	71973
C0600-049-0750	71730	C0600-063-2750S	71775S	C0600-085-0750S	71820S	C0690-051-0690	71925	C0720-065-3000S	71973S
C0600-049-0750S	71730S	C0600-063-3000	71776	C0600-085-0880S	71821	C0690-051-0690S	71925S	C0720-067-0750	71976
C0600-049-1000	71732	C0600-063-3000S	71776S	C0600-085-1000	71822	C0720-055-0620	71926	C0720-067-0750S	71976S
C0600-049-1000S	71732S	C0600-063-3500	71778	C0600-085-1000S	71822S	C0720-055-0750	71927	C0720-067-0880S	71977S
C0600-049-1250	71733	C0600-063-3500S	71778S	C0600-085-1250	71823	C0720-055-0750S	71927S	C0720-067-1000	71978
C0600-049-1250S	71733S	C0600-067-0625	71779	C0600-085-1250S	71823S	C0690-051-0880	71928	C0720-067-1000S	71978S
C0600-049-1500	71734	C0600-067-0625S	71779S	C0600-085-1500	71824	C0720-055-0880S	71928S	C0720-067-1250	71979
C0600-049-1500S	71734S	C0600-067-0750	71780	C0600-085-1500S	71824S	C0720-055-1000	71929	C0720-067-1250S	71979S
C0600-049-1750	71735	C0600-067-0750S	71780S	C0600-085-1750	71825	C0720-055-1000S	71929S	C0720-067-1500	71980
C0600-049-1750S	71735S	C0600-067-0880	71781	C0600-085-1750S	71825S	C0720-055-1250	71930	C0720-067-1500S	71980S
C0600-049-2000	71736	C0600-067-0880S	71781S	C0600-085-2000	71826	C0720-055-1250S	71930S	C0720-067-1750	71981
C0600-049-2000S	71736S	C0600-067-1000	71782	C0600-085-2000S	71826S	C0720-055-1500	71931	C0720-067-1750S	71981S
C0600-049-2250	71737	C0600-067-1000S	71782S	C0600-085-2250	71827	C0720-055-1750	71932	C0720-067-2000	71982S
C0600-049-2250S	71737S	C0600-067-1250	71783	C0600-085-2250S	71827S	C0720-055-2000	71932S	C0720-067-2250	71983
C0600-049-2500	71738	C0600-067-1250S	71783S	C0600-085-2500	71828	C0720-055-2200	71933	C0720-067-2250S	71983S
C0600-049-2500S	71738S	C0600-067-1500	71784	C0600-085-2500S	71828S	C0720-055-2500	71933S	C0720-067-2500	71984
C0600-049-2750	71739	C0600-067-1500S	71784S	C0600-085-2750	71829	C0720-055-2750	71934	C0720-067-2500S	71984S
C0600-049-2750S	71739S	C0600-067-1750	71785	C0600-085-2750S	71829S	C0720-055-2750S	71934S	C0720-067-3000	71985
C0600-049-3000	71740	C0600-067-1750S	71785S	C0600-085-3000	71830	C0720-055-2500	71935	C0720-067-3000S	71985S
C0600-049-3000S	71740S	C0600-067-2000	71786	C0600-085-3000S	71830S	C0720-055-2500S	71935S	C0720-067-3250	71988
C0600-055-0625	71741	C0600-067-2000S	71786S	C0600-085-3250	71831	C0720-055-2500S	71935S	C0720-067-3250S	71988S
C0600-055-0625S	71741S	C0600-067-2250	71787	C0600-085-3250S	71831S	C0720-055-2750	71936	C0720-067-3250S	71988S
C0600-055-0750	71742	C0600-067-2250S	71787S	C0600-085-3500	71832	C0720-055-2750S	71936S	C0720-067-3500	71989
C0600-055-0750S	71742S	C0600-067-2500	71788	C0600-085-3500S	71832S	C0720-055-3000	71937	C0720-067-3500S	71989S
C0600-055-0880	71743	C0600-067-2500S	71788S	C0600-085-3750	71833	C0720-055-3000S	71937S	C0720-07-0750	72014S
C0600-055-1000	71744	C0600-067-2750S	71789S	C0600-085-4000	71834	C0720-059-0750S	71938	C0720-07-0750S	72014S
C0600-055-1000S	71744S	C0600-067-3000	71790	C0600-085-4000S	71834S	C0720-059-0880	71939	C0720-072-0880	72015
C0600-055-1250	71745	C0600-067-3000S	71790S	C0600-085-4000S	71834S	C0720-059-0880S	71939S	C0720-072-1000	72016
C0600-055-1250S	71745S	C0600-072-0620	71791	C0600-092-0750S	71835S	C0720-059-1000	71940	C0720-072-1000S	72016S
C0600-055-1500	71746	C0600-072-0620S	71791S	C0600-092-0880	71836	C0720-059-1000S	71940S	C0720-072-1250	72017
C0600-055-1500S	71746S	C0600-072-0750	71792	C0600-092-0880S	71836S	C0720-059-1250	71941	C0720-072-1250S	72017S
C0600-055-1750	71747	C0600-072-0750S	71792S	C0600-092-1000	71837	C0720-059-1250S	71941S	C0720-072-1500	72018
C0600-055-1750S	71747S	C0600-072-0880	71793	C0600-092-1000S	71837S	C0720-05			

Associated Spring / Century Spring Part Numbers



Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.
C0720-072-3250S	72025S	C0720-105-1250	72113	C0850-081-0875S	72234S	C0850-098-3500	72296	C0975-105-2750S	72423S
C0720-072-3500	72026	C0720-105-1250S	72113S	C0850-081-1000	72235	C0850-098-3500S	72296S	C0975-105-3000	72424
C0720-072-3500S	72026S	C0720-105-1500	72114	C0850-081-1000S	72235S	C0975-074-0750	72351	C0975-105-3000S	72424S
C0720-072-4000	72027	C0720-105-1500S	72114S	C0850-081-1250	72236	C0975-074-0750S	72351S	C0975-105-3500	72425
C0720-072-4000S	72027S	C0720-105-1750	72115	C0850-081-1250S	72236S	C0975-074-0875	72352	C0975-105-3500S	72425S
C0720-081-0750	72057	C0720-105-1750S	72115S	C0850-081-1500	72238	C0975-074-0875S	72352S	C0975-105-4000	72426
C0720-081-0750S	72057S	C0720-105-2000	72116	C0850-081-1500S	72238S	C0975-074-1000	72353	C0975-105-4000S	72426S
C0720-081-0880	72058	C0720-105-2000S	72116S	C0850-081-1750	72239	C0975-074-1000S	72353S	C0975-112-0880	72427
C0720-081-0880S	72058S	C0720-105-2250	72117	C0850-081-1750S	72239S	C0975-074-1250	72354	C0975-112-0880S	72427S
C0720-081-1000	72059	C0720-105-2250S	72117S	C0850-081-2000	72240	C0975-074-1250S	72354S	C0975-112-1000	72428
C0720-081-1000S	72059S	C0720-105-2500	72118	C0850-081-2000S	72240S	C0975-074-1500	72355	C0975-112-1000S	72428S
C0720-081-1250	72060	C0720-105-2500S	72118S	C0850-081-2250	72241	C0975-074-1500S	72355S	C0975-112-1250	72430
C0720-081-1250S	72060S	C0720-105-2750	72119	C0850-081-2250S	72241S	C0975-074-2000	72358	C0975-112-1250S	72430S
C0720-081-1500	72061	C0720-105-2750S	72119S	C0850-081-2500	72242	C0975-074-2000S	72358S	C0975-112-1500	72431
C0720-081-1500S	72061S	C0720-105-3000	72120	C0850-081-2500S	72242S	C0975-074-2500	72361	C0975-112-1500S	72431S
C0720-081-1750	72062	C0720-105-3000S	72120S	C0850-081-2750	72243	C0975-074-2500S	72361S	C0975-112-2000	72433
C0720-081-1750S	72062S	C0720-105-3500	72121	C0850-081-2750S	72243S	C0975-074-3000	72364	C0975-112-2000S	72433S
C0720-081-2000	72063	C0720-105-3500S	72121S	C0850-081-3000	72244	C0975-074-3000S	72364S	C0975-112-2500	72435
C0720-081-2000S	72063S	C0720-105-4000	72122	C0850-081-3000S	72244S	C0975-074-3500	72365	C0975-112-2500S	72435S
C0720-081-2250	72064	C0720-105-4000S	72122S	C0850-081-3500	72245	C0975-074-3500S	72365S	C0975-112-3000	72437
C0720-081-2250S	72064S	C0720-112-0750	72123	C0850-081-3500S	72245S	C0975-074-4000	72366	C0975-112-3000S	72437S
C0720-081-2500	72065	C0720-112-0750S	72123S	C0850-085-0750	72246	C0975-074-4000S	72366S	C0975-112-3500	72438
C0720-081-2500S	72065S	C0720-112-0880	72124	C0850-085-0750S	72246S	C0975-085-0875	72379	C0975-112-3500S	72438S
C0720-081-2750	72066	C0720-112-0880S	72124S	C0850-085-0875	72247	C0975-085-0875S	72379S	C0975-125-0880	72455
C0720-081-2750S	72066S	C0720-112-1000	72125	C0850-085-0875S	72247S	C0975-085-1000	72380	C0975-125-0880S	72455S
C0720-081-3000	72067	C0720-112-1000S	72125S	C0850-085-1000	72248	C0975-085-1000S	72380S	C0975-125-1000	72456
C0720-081-3000S	72067S	C0720-112-1250	72126	C0850-085-1000S	72248S	C0975-085-1250	72381	C0975-125-1000S	72456S
C0720-081-3500	72068	C0720-112-1250S	72126S	C0850-085-1250	72249	C0975-085-1250S	72381S	C0975-125-1250	72457
C0720-081-3500S	72068S	C0720-112-1500	72127	C0850-085-1250S	72249S	C0975-085-1500	72382	C0975-125-1250S	72457S
C0720-081-4000	72069	C0720-112-1500S	72127S	C0850-085-1500	72251	C0975-085-1500S	72382S	C0975-125-1500	72458
C0720-081-4000S	72069S	C0720-112-1750	72128	C0850-085-1500S	72251S	C0975-085-2000	72385	C0975-125-1500S	72458S
C0720-085-0750	72070	C0720-112-1750S	72128S	C0850-085-1750	72252	C0975-085-2000S	72385S	C0975-125-1750	72459
C0720-085-0750S	72070S	C0720-112-2000	72129	C0850-085-1750S	72252S	C0975-085-2500	72388	C0975-125-1750S	72459S
C0720-085-0880	72071	C0720-112-2000S	72129S	C0850-085-2000	72253	C0975-085-2500S	72388S	C0975-125-2000	72460
C0720-085-0880S	72071S	C0720-112-2250	72130	C0850-085-2000S	72253S	C0975-085-3000	72391	C0975-125-2000S	72460S
C0720-085-1000	72072	C0720-112-2250S	72130S	C0850-085-2250	72254	C0975-085-3000S	72391S	C0975-125-2250	72461
C0720-085-1250	72073	C0720-112-2500S	72131S	C0850-085-2500	72255	C0975-085-3500	72392	C0975-125-2250S	72461S
C0720-085-1250S	72073S	C0720-112-2750	72132	C0850-085-2500S	72255S	C0975-092-0875	72394	C0975-125-2500	72462
C0720-085-1500	72074	C0720-112-2750S	72132S	C0850-085-2750	72256	C0975-092-0875S	72394S	C0975-125-2750	72463
C0720-085-1500S	72074S	C0720-112-3000	72133	C0850-085-2750S	72256S	C0975-092-1000	72395	C0975-125-2750S	72463S
C0720-085-1750	72075	C0720-112-3000S	72133S	C0850-085-3000	72257	C0975-092-1000S	72395S	C0975-125-3000	72464
C0720-085-1750S	72075S	C0720-112-3500	72134	C0850-085-3000S	72257S	C0975-092-1250	72396	C0975-125-3000S	72464S
C0720-085-2000	72076	C0720-112-3500S	72134S	C0850-085-3250	72258	C0975-092-1250S	72396S	C0975-125-3500	72465
C0720-085-2000S	72076S	C0720-112-4000	72135	C0850-085-3250S	72258S	C0975-092-1500	72397	C0975-125-3500S	72465S
C0720-085-2250	72077	C0720-112-4000S	72135S	C0850-085-3500	72259	C0975-092-1500S	72397S	C0975-125-4000	72466
C0720-085-2250S	72077S	C0850-068-0750	72172	C0850-085-3500S	72259S	C0975-092-2000	72398	C0975-125-4000S	72466S
C0720-085-2500	72078	C0850-068-0750S	72172S	C0850-085-4000	72260	C0975-092-2000S	72398S	C0975-135-0880	72467
C0720-085-2500S	72078S	C0850-068-0875	72173	C0850-085-4000S	72260S	C0975-092-2500	72399	C0975-135-0880S	72467S
C0720-085-2750	72079	C0850-068-0875S	72173S	C0850-092-0800	72276	C0975-092-2500S	72399S	C0975-135-1000	72468
C0720-085-2750S	72079S	C0850-068-1000	72174	C0850-092-0800S	72276S	C0975-092-3000	72400	C0975-135-1000S	72468S
C0720-085-3000	72080	C0850-068-1000S	72174S	C0850-092-1000	72277	C0975-092-3000S	72400S	C0975-135-1500	72469
C0720-085-3000S	72080S	C0850-068-1250	72175	C0850-092-1000S	72277S	C0975-092-3500	72401	C0975-135-1500S	72469S
C0720-085-3500	72081	C0850-068-1250S	72175S	C0850-092-1250	72278	C0975-092-3500S	72401S	C0975-135-2000	72470
C0720-085-3500S	72081S	C0850-068-1500	72176	C0850-092-1500	72279	C0975-092-4000	72402	C0975-135-2500	72471
C0720-085-4000	72082	C0850-068-1500S	72176S	C0850-092-1500S	72279S	C0975-096-0875	72403	C0975-135-2500S	72471S
C0720-085-4000S	72082S	C0850-068-1750	72177	C0850-092-1750	72280	C0975-096-0875S	72403S	C0975-135-3000	72472
C0720-096-0750	72097	C0850-068-1750S	72177S	C0850-092-1750S	72280S	C0975-096-1000	72404	C0975-135-3000S	72472S
C0720-096-0880	72098	C0850-068-2000	72178	C0850-092-2000	72281	C0975-096-1000S	72404S	C0975-135-3500	72473
C0720-096-0880S	72098S	C0850-068-2250	72179	C0850-092-2000S	72281S	C0975-096-1250	72405	C0975-135-3500S	72473S
C0720-096-1000	72099	C0850-068-2250S	72179S	C0850-092-2250	72282	C0975-096-1250S	72405S	C0975-135-4000	72474
C0720-096-1000S	72099S	C0850-068-2500	72180	C0850-092-2250S	72282S	C0975-096-1500	72406	C0975-135-4000S	72474S
C0720-096-1250	72100	C0850-068-2500S	72180S	C0850-092-2500	72283	C0975-096-1500S	72406S	C0975-148-1000	72475
C0720-096-1250S	72100S	C0850-068-3000	72183	C0850-092-2500S	72283S	C0975-096-2000	72408	C0975-148-1000S	72475S
C0720-096-1500	72101	C0850-068-3000S	72183S	C0850-092-2750	72284	C0975-096-2000S	72408S	C0975-148-1500	72476
C0720-096-1500S	72101S	C0850-068-3500	72184	C0850-092-2750S	72284S	C0975-096-2500	72410	C0975-148-1500S	72476S
C0720-096-1750	72102	C0850-068-3500S	72184S	C0850-092-3000	72285	C0975-096-2500S	72410S	C0975-148-2000	72477
C0720-096-2000	72103	C0850-068-4000	72185	C0850-092-3000S	72285S	C0975-096-3000	72412	C0975-148-2000S	72477S
C0720-096-2000S	72103S	C0850-068-4000S	72185S	C0850-092-3500	72286	C0975-096-3000S	72412S	C0975-148-2500	72478
C0720-096-2250	72104	C0850-074-0875	72195	C0850-092-3500S	72286S	C0975-096-3500	72413	C0975-148-2500S	72478S
C0720-096-2250S	72104S	C0850-074-1000	72196	C0850-092-3500S	72287	C0975-096-3500S	72413S	C0975-148-3000	72479
C0720-096-2500	72105	C0850-074-1000S	72196S	C0850-092-4000	72287S	C0975-096-1080	72415	C0975-148-3000S	72479S
C0720-096-2500S	72105S	C0850-074-1250	72197	C0850-092-4000S	72288	C0975-096-1080S	72415S	C0975-148-3500	72480
C0720-096-2750	72106	C0850-074-1250S	72197S	C0850-098-1500	72289	C0975-096-1000	72416	C0975-148-3500S	72480S
C0720-096-2750S	72106S	C0850-074							

Associated Spring / Century Spring Part Numbers

Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.
C1100-085-0875	72514	C1100-125-1500S	72585S	C1225-105-2000	72657	C1225-148-3000S	72716S	C1460-125-2500	72796
C1100-085-0875S	72514S	C1100-125-1750	72586	C1225-105-2000S	72657S	C1225-148-3500	72717	C1460-125-2500S	72796S
C1100-085-1000	72515	C1100-125-1750S	72586S	C1225-105-2500	72658	C1225-148-3500S	72717S	C1460-125-3000	72797
C1100-085-1000S	72515S	C1100-125-2000	72587	C1225-105-2500S	72658S	C1225-148-4000	72718	C1460-125-3000S	72797S
C1100-085-1250	72516	C1100-125-2000S	72587S	C1225-105-3000	72659	C1225-148-4000S	72718S	C1460-125-3500	72798
C1100-085-1250S	72516S	C1100-125-2250	72588	C1225-105-3000S	72659S	C1225-148-4500	72719	C1460-125-3500S	72798S
C1100-085-1500	72517	C1100-125-2250S	72588S	C1225-105-3500	72660	C1225-148-4500S	72719S	C1460-125-4000	72799
C1100-085-1500S	72517S	C1100-125-2500	72589	C1225-105-3500S	72660S	C1225-148-5000	72720	C1460-125-4000S	72799S
C1100-085-2000	72520	C1100-125-2500S	72589S	C1225-105-4000	72661	C1225-148-5000S	72720S	C1460-135-1500	72800
C1100-085-2000S	72520S	C1100-125-3000	72590	C1225-105-4000S	72661S	C1225-162-1000	72729	C1460-135-1500S	72800S
C1100-085-2500	72521	C1100-125-3000S	72590S	C1225-105-4500	72662	C1225-162-1000S	72729S	C1460-135-2000	72801
C1100-085-2500S	72521S	C1100-125-3500	72591	C1225-105-4500S	72662S	C1225-162-1500	72730	C1460-135-2000S	72801S
C1100-085-3000	72522	C1100-125-3500S	72591S	C1225-105-5000	72663	C1225-162-1500S	72730S	C1460-135-2500	72802
C1100-085-3000S	72522S	C1100-125-4000	72592	C1225-105-5000S	72663S	C1225-162-2000	72731	C1460-135-2500S	72802S
C1100-085-3500	72523	C1100-125-4000S	72592S	C1225-112-0875	72664	C1225-162-2000S	72731S	C1460-135-3000	72803
C1100-085-3500S	72523S	C1100-125-4500	72593	C1225-112-0875S	72664S	C1225-162-3000	72732	C1460-135-3000S	72803S
C1100-085-4000	72524	C1100-125-4500S	72593S	C1225-112-1000	72665	C1225-162-3000S	72733	C1460-135-3500	72804
C1100-085-4000S	72524S	C1100-135-1500	72594	C1225-112-1000S	72665S	C1225-162-3000S	72734	C1460-135-3500S	72804S
C1100-085-4500	72525	C1100-135-1500S	72594S	C1225-112-1250	72666	C1225-162-3000S	72734S	C1460-135-4000	72805
C1100-085-4500S	72525S	C1100-135-2000	72597	C1225-112-1250S	72666S	C1225-162-3500	72735	C1460-135-4000S	72805S
C1100-085-5000	72526	C1100-135-2000S	72597S	C1225-112-1500	72667	C1225-162-3500S	72735S	C1460-148-1500	72810
C1100-085-5000S	72526S	C1100-135-2500	72599	C1225-112-1500S	72667S	C1225-162-4000	72737	C1460-148-1500S	72810S
C1100-096-0875	72537	C1100-135-2500S	72599S	C1225-112-2000	72670	C1225-162-4000S	72737S	C1460-148-2000	72811
C1100-096-0875S	72537S	C1100-135-3000	72600	C1225-112-2000S	72670S	C1225-162-4500	72738	C1460-148-2000S	72811S
C1100-096-1000	72538	C1100-135-3000S	72600S	C1225-112-2500	72671	C1225-162-4500S	72738S	C1460-148-2500	72812
C1100-096-1000S	72538S	C1100-135-3500	72601	C1225-112-2500S	72671S	C1225-162-5000	72739	C1460-148-2500S	72812S
C1100-096-1250	72539	C1100-135-3500S	72601S	C1225-112-3000	72672	C1225-162-5000S	72739S	C1460-148-3000	72813
C1100-096-1250S	72539S	C1100-135-4000	72602	C1225-112-3000S	72672S	C1225-177-1500	72743	C1460-148-3000S	72813S
C1100-096-1500	72540	C1100-135-4000S	72602S	C1225-112-3500	72673	C1225-177-1500S	72743S	C1460-148-3500	72814
C1100-096-1500S	72540S	C1100-135-4500	72603	C1225-112-3500S	72673S	C1225-177-2000	72744	C1460-148-3500S	72814S
C1100-096-2000	72543	C1100-135-4500S	72603S	C1225-112-4000	72674	C1225-177-2000S	72744S	C1460-148-4000	72815
C1100-096-2000S	72543S	C1100-135-5000	72604	C1225-112-4000S	72674S	C1225-177-2500	72745	C1460-148-4000S	72815S
C1100-096-2500	72544	C1100-135-5000S	72604S	C1225-125-0875	72679	C1225-177-2500S	72745S	C1460-162-1500	72832
C1100-096-2500S	72544S	C1225-085-0875	72627	C1225-125-0875S	72679S	C1225-177-3000	72746	C1460-162-1500S	72832S
C1100-096-3000	72545	C1225-085-0875S	72627S	C1225-125-1000	72680	C1225-177-3000S	72746S	C1460-162-2000	72833
C1100-096-3000S	72545S	C1225-085-1000	72628	C1225-125-1000S	72680S	C1225-177-3500	72747	C1460-162-2000S	72833S
C1100-096-3500	72546	C1225-085-1000S	72628S	C1225-125-1250	72681	C1225-177-3500S	72747S	C1460-162-2500	72834
C1100-096-4000	72547	C1225-085-1500S	72629S	C1225-125-1500	72682	C1225-177-4000S	72748S	C1460-162-3000	72835
C1100-096-4000S	72547S	C1225-085-2000	72630	C1225-125-1500S	72682S	C1225-177-4500	72749	C1460-162-3000S	72835S
C1100-096-4500	72548	C1225-085-2000S	72630S	C1225-125-1750	72683	C1225-177-4500S	72749S	C1460-162-3500	72836
C1100-096-4500S	72548S	C1225-085-2500	72631	C1225-125-1750S	72683S	C1225-177-5000	72750	C1460-162-3500S	72836S
C1100-105-0875	72549	C1225-085-2500S	72631S	C1225-125-2000	72684	C1225-177-5000S	72750S	C1460-162-4000	72837
C1100-105-0875S	72549S	C1225-085-3000	72632	C1225-125-2000S	72684S	C1225-192-1500	72751	C1460-162-4000S	72837S
C1100-105-1000	72550	C1225-085-3000S	72632S	C1225-125-2250	72685	C1225-192-1500S	72751S	C1460-162-4500	72838
C1100-105-1000S	72550S	C1225-085-3500	72633	C1225-125-2250S	72685S	C1225-192-2000	72752	C1460-162-4500S	72838S
C1100-105-1250	72551	C1225-085-3500S	72633S	C1225-125-2500	72686	C1225-192-2000S	72752S	C1460-162-5000	72839
C1100-105-1250S	72551S	C1225-085-4000	72634	C1225-125-2500S	72686S	C1225-192-2500	72753	C1460-162-5000S	72839S
C1100-105-1500	72552	C1225-085-4000S	72634S	C1225-125-2750	72687	C1225-192-2500S	72753S	C1687-135-1500	72872
C1100-105-1500S	72552S	C1225-085-4500	72635	C1225-125-2750S	72687S	C1225-192-3000	72754	C1687-135-1500S	72872S
C1100-105-2000	72554	C1225-085-4500S	72635S	C1225-125-3000	72688	C1225-192-3000S	72754S	C1687-135-2000	72873
C1100-105-2000S	72554S	C1225-085-5000	72636	C1225-125-3000S	72688S	C1225-192-3500	72755	C1687-135-2000S	72873S
C1100-105-2500	72555	C1225-085-5000S	72636S	C1225-125-3500	72689	C1225-192-3500S	72755S	C1687-135-2500	72874
C1100-105-2500S	72555S	C1225-096-0875	72637	C1225-125-3500S	72689S	C1225-192-4000	72756	C1687-135-2500S	72874S
C1100-105-3000	72556	C1225-096-0875S	72637S	C1225-125-4000	72690	C1225-192-4000S	72756S	C1687-135-3000	72875
C1100-105-3000S	72556S	C1225-096-1000	72638	C1225-125-4000S	72690S	C1225-192-4500	72757	C1687-135-3000S	72875S
C1100-105-3500	72557	C1225-096-1000S	72638S	C1225-125-4500	72691	C1225-192-4500S	72757S	C1687-135-3500	72876
C1100-105-3500S	72557S	C1225-096-1250	72639	C1225-125-4500S	72691S	C1225-192-5000	72758	C1687-135-3500S	72876S
C1100-112-0875	72560	C1225-096-1250S	72639S	C1225-125-5000	72692	C1225-192-5000S	72758S	C1687-135-4000	72877
C1100-112-0875S	72560S	C1225-096-1500	72640	C1225-125-5000S	72692S	C1225-207-2000	72759	C1687-135-4000S	72877S
C1100-112-1000	72561	C1225-096-1500S	72640S	C1225-125-3880	72693	C1225-207-2000S	72759S	C1687-135-4500S	72878S
C1100-112-1000S	72561S	C1225-096-1750	72641	C1225-125-3880S	72693S	C1225-207-2500	72760	C1687-135-5000	72879
C1100-112-1250	72562	C1225-096-1750S	72641S	C1225-125-3880S	72694	C1225-207-2500S	72760S	C1687-135-5000S	72879S
C1100-112-1250S	72562S	C1225-096-2000	72642	C1225-125-3880S	72694S	C1225-207-3000	72761	C1687-135-5000S	72879S
C1100-112-1500	72563	C1225-096-2000S	72642S	C1225-125-3880S	72695	C1225-207-3000S	72761S	C1687-148-1500	72880
C1100-112-1500S	72563S	C1225-096-2250	72643	C1225-125-3880S	72695S	C1225-207-3500	72762	C1687-148-1500S	72880S
C1100-112-1750	72564	C1225-096-2250S	72643S	C1225-125-3880S	72696	C1225-207-3500S	72762S	C1687-162-1500	72878
C1100-112-1750S	72564S	C1225-096-2500	72644	C1225-125-3880S	72696S	C1225-207-4000	72763	C1687-162-1500S	72879S
C1100-112-2000	72565	C1225-096-2500S	72644S	C1225-125-3880S	72697	C1225-207-4000S	72763S	C1687-177-1500	72878
C1100-112-2000S	72565S	C1225-096-2750	72645	C1225-125-3880S	72697S	C1225-207-4500	72764	C1687-177-1500S	72878S
C1100-112-2250	72566	C1225-096-2750S	72645S	C1225-125-3880S	72698	C1225-207-4500S	72764S	C1687-177-2000	72879
C1100-112-2250S	72566S	C1225-096-3000	72646	C1225-125-3880S	72698S	C1225-207-5000	72765	C1687-177-2000S	72879S
C1100-112-2500	72567	C1225-096-3000S	72646S	C1225-125-3880S	72699	C1225-207-5000S	72765S	C1687-177-4000	72879S
C1100-112-2500S	72567S	C1225-096-3500	72647	C1225-125-3880S	72699S				

Associated Spring / Century Spring Part Numbers



Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.
Extension Springs									
C1687-192-4000S	72914S	E0063-007-0250	80000	E0094-012-0620S	80043S	E0120-018-0380	80090	E0180-018-0880S	80134S
C1687-192-4500	72915	E0063-007-0250S	80000S	E0094-012-0750S	80044S	E0120-018-0380S	80090S	E0180-018-1000	80135
C1687-192-4500S	72915S	E0063-007-0310	80001	E0094-012-0880	80045	E0120-018-0500	80091	E0180-018-1000S	80135S
C1687-192-5000	72916	E0063-007-0310S	80001S	E0094-012-1000	203-B	E0120-018-0620	80092	E0180-018-1120	80136
C1687-192-5000S	72916S	E0063-007-0380	80002	E0094-012-1000S	80046S	E0120-018-0620S	80092S	E0180-018-1120S	80136S
C1937-148-2000	72933	E0063-007-0380S	80002S	E0094-013-0380	80047	E0120-018-0750S	80093	E0180-018-1250	80137
C1937-148-2500	72934	E0063-007-0440	80003	E0094-013-0380S	80047S	E0120-018-0880	80094	E0180-018-1250S	80137S
C1937-148-2500S	72934S	E0063-007-0440S	80003S	E0094-013-0440	80048	E0120-018-0880S	80094S	E0180-018-1370	80138
C1937-148-3000	72935	E0063-007-0500	80004	E0094-013-0440S	80048S	E0120-018-1000	80095	E0180-018-1370S	80138S
C1937-148-3500	72936	E0063-007-0500S	80004S	E0094-013-0500	80049	E0120-018-1000S	80095S	E0180-018-1500	80139
C1937-148-3500S	72936S	E0063-008-0250	80005	E0094-013-0500S	80049S	E0120-018-1120	80096	E0180-018-1500S	80139S
C1937-148-4000	72937	E0063-008-0250S	80005S	E0094-013-0620	80050	E0120-018-1120S	80096S	E0180-018-1750	80141
C1937-148-4000S	72937S	E0063-008-0310	80006	E0094-013-0620S	80050S	E0120-018-1250	80097	E0180-018-2000	80143
C1937-148-4500	72938	E0063-008-0310S	80006S	E0094-013-0750	80051	E0120-018-1250S	80097S	E0180-018-2250	80144
C1937-148-4500S	72938S	E0063-008-0380	80007	E0094-013-0750S	80051S	E0120-018-1370	80098	E0180-018-2250S	80144S
C1937-148-5000	72939	E0063-008-0380S	80007S	E0094-013-0880	80052	E0120-018-1370S	80098S	E0180-018-2500	80145
C1937-148-5000S	72939S	E0063-008-0440	80008	E0094-013-0880S	80052S	E0120-018-1500	80099	E0180-018-2500S	80145S
C1937-148-5500	72940	E0063-008-0440S	80008S	E0094-013-1000	80053	E0120-018-1500S	80099S	E0180-020-0620	80146
C1937-148-5500S	72940S	E0063-008-0500	80009	E0094-013-1000S	80053S	E0120-018-1750	80100	E0180-020-0620S	80146S
C1937-162-2000	72959	E0063-008-0500S	80009S	E0094-014-0380	80054	E0120-018-1750S	80100S	E0180-020-0750	80147
C1937-162-2000S	72959S	E0063-008-0620	80010	E0094-014-0380S	ZZ4-36	E0120-018-2000	80101	E0180-020-0750S	80147S
C1937-162-2500	72960	E0063-008-0620S	80010S	E0094-014-0440	80055	E0120-018-2000S	80101S	E0180-020-0880	80148
C1937-162-2500S	72960S	E0063-008-0750	80011	E0094-014-0440S	80055S	E0120-018-2250	80102	E0180-020-0880S	80148S
C1937-162-3000	72961	E0063-008-0750S	80011S	E0094-014-0500	80056	E0120-018-2250S	80102S	E0180-020-1000	80149
C1937-162-3000S	72961S	E0063-009-0250	80012	E0094-014-0500S	80056S	E0120-020-0500	80103	E0180-020-1120	80150
C1937-162-3500	72962	E0063-009-0250S	80012S	E0094-014-0620	80057	E0120-020-0500S	80103S	E0180-020-1120S	80150S
C1937-162-3500S	72962S	E0063-009-0310	80013	E0094-014-0620S	80057S	E0120-020-0620	80104	E0180-020-1250	80151
C1937-162-4000	72963	E0063-009-0310S	80013S	E0094-014-0750	80058	E0120-020-0620S	80104S	E0180-020-1250S	80151S
C1937-162-4000S	72963S	E0063-009-0380	80014	E0094-014-0750S	80058S	E0120-020-0750	80105	E0180-020-1370	80152
C1937-162-4500	72964	E0063-009-0380S	80014S	E0094-014-0880	ZZ1-26	E0120-020-0750S	80105S	E0180-020-1370S	80152S
C1937-162-4500S	72964S	E0063-009-0440	80015	E0094-014-0880S	80059S	E0120-020-0880	80106	E0180-020-1500	80153
C1937-162-5000	72965	E0063-009-0440S	80015S	E0094-014-1000	ZZ3-28	E0120-020-0880S	80106S	E0180-020-1500S	80153S
C1937-162-5000S	72965S	E0063-009-0500	80016	E0094-014-1000S	80060S	E0120-020-1000	80107	E0180-020-1750	80154
C1937-162-5500	72966	E0063-009-0500S	80016S	E0094-016-0380	80061	E0120-020-1000S	80107S	E0180-020-1750S	80154S
C1937-162-5500S	72966S	E0063-009-0620	80017	E0094-016-0380S	80061S	E0120-020-1120	80108	E0180-020-2000	80156
C1937-177-2500	72967	E0063-009-0620S	80017S	E0094-016-0440	80062	E0120-020-1120S	80108S	E0180-020-2250	80156S
C1937-177-2500S	72967S	E0063-009-0750	80018	E0094-016-0440S	80062S	E0120-020-1250	80109	E0180-020-2250S	80157
C1937-177-3000	72968	E0063-009-0750S	80018S	E0094-016-0500	80063	E0120-020-1250S	80109S	E0180-020-2250S	80157S
C1937-177-3000S	72968S	E0063-011-0250	80019	E0094-016-0500S	80063S	E0120-020-1370	80110	E0180-020-2250S	80157S
C1937-177-3500	72969	E0063-011-0250S	80019S	E0094-016-0620	80064	E0120-020-1370S	80110S	E0180-020-2500	80158
C1937-177-3500S	72969S	E0063-011-0310	80020	E0094-016-0620S	80064S	E0120-020-1500	80111	E0180-020-2500S	80158S
C1937-177-4000	72970	E0063-011-0310S	80020S	E0094-016-0750	80065	E0120-020-1500S	80111S	E0180-022-0500	80159
C1937-177-4000S	72970S	E0063-011-0380	80021	E0094-016-0750S	80065S	E0120-020-1750	80112	E0180-022-0500S	80159S
C1937-177-4500	72971	E0063-011-0380S	80021S	E0094-016-0880	80066	E0120-020-1750S	80112S	E0180-022-0620	80160
C1937-177-4500S	72971S	E0063-011-0440	80022	E0094-016-0880S	80066S	E0120-020-2000	80113	E0180-022-0620S	80160S
C1937-177-5000	72972	E0063-011-0440S	80022S	E0094-016-1000	80067	E0120-020-2000S	80113S	E0180-022-0750	80161
C1937-177-5000S	72972S	E0063-011-0500	80023	E0094-016-1000S	80067S	E0120-020-2250	80114	E0180-022-0750S	80161S
C1937-177-5500	72973	E0063-011-0500S	80023S	E0094-016-0420	80069	E0120-020-2250S	80114S	E0180-022-0880	80162
C1937-177-5500S	72973S	E0063-011-0620	80024	E0094-016-0620S	80069S	E0120-022-0620	80115	E0180-022-0880S	80162S
C1937-177-6000	72974	E0063-011-0620S	80024S	E0120-014-0750	80070	E0120-022-0620S	80115S	E0180-022-1000	80163
C1937-177-6000S	72974S	E0063-011-0750	80025	E0120-014-0750S	80070S	E0120-022-0750	80116	E0180-022-1000S	80163S
C1937-192-2500	72977	E0063-011-0750S	80025S	E0120-014-0880	80072	E0120-022-0750S	80116S	E0180-022-1120	80164
C1937-192-2500S	72977S	E0094-010-0380	80026	E0120-014-0880S	80072S	E0120-022-0880	80117	E0180-022-1250	80165
C1937-192-3000	72978	E0094-010-0380S	80026S	E0120-014-1000	80073	E0120-022-1000	80118	E0180-022-1250S	80165S
C1937-192-3000S	72978S	E0094-010-0440	80027	E0120-014-1000S	80073S	E0120-022-1000S	80118S	E0180-022-1370	80166
C1937-192-3500	72979	E0094-010-0440S	80027S	E0120-014-1120	80074	E0120-022-1000S	80118S	E0180-022-1370S	80166S
C1937-192-3500S	72979S	E0094-010-0500	80028	E0120-014-1120S	80074S	E0120-022-1120	80119	E0180-022-1500	80167
C1937-192-4000	72980	E0094-010-0500S	80028S	E0120-014-1250	80075	E0120-022-1120S	80119S	E0180-022-1500S	80167S
C1937-192-4000S	72980S	E0094-010-0620	80029	E0120-014-1250S	80075S	E0120-022-1250	80120	E0180-022-1500S	80167S
C1937-192-4500	72981	E0094-010-0750	80030	E0120-014-1370	80076	E0120-022-1250S	80120S	E0180-022-1750	80168
C1937-192-5000	72982	E0094-010-0750S	80030S	E0120-014-1500	80077	E0120-022-1370S	80121S	E0180-022-1750S	80168S
C1937-192-5000S	72982S	E0094-010-0880	80031	E0120-014-1500S	80077S	E0120-022-1500	80122	E0180-022-2000	80169
C1937-192-5500	72983	E0094-010-0880S	80031S	E0120-016-0380	80078	E0120-022-1500S	80122S	E0180-022-2250	80170
C1937-192-5500S	72983S	E0094-010-1000	203-A	E0120-016-0380S	80078S	E0120-022-1750S	80123S	E0180-022-2250S	80170S
C1937-192-6000	72984	E0094-010-1000S	80032S	E0120-016-0500	80079	E0120-022-2000	80124	E0180-022-2500S	80171S
C1937-192-6000S	72984S	E0094-011-0380	80033	E0120-016-0500S	80079S	E0120-022-2000S	80124S	E0180-024-0620	80172
C1937-207-2500	72985	E0094-011-0380S	80033S	E0120-016-0620	80080	E0120-022-2000S	80124S	E0180-024-0620S	80172S
C1937-207-2500S	72985S	E0094-011-0440	80034	E0120-016-0620S	80080S	E0120-022-2250	80125	E0180-024-0750	80173
C1937-207-3500	72987	E0094-011-0440S	80034S	E0120-016-0750	80081	E0120-022-2250S	80125S	E0180-024-0750S	80173S
C1937-207-4000	72988	E0094-011-0500	80035	E0120-016-0750S	80081S	E0120-022-2500	80126	E0180-024-0750S	80173S
C1937-207-4000S	72988S	E0094-011-0620	80036	E0120-016-0880S	80082S	E0120-022-2500S	80126S	E0180-024-0880	80174
C1937-207-4500	72989	E0094-011-0620S	80036S	E0120-016-1000	80083	E0120-022-2600S	80127S	E0180-024-1000	80175
C1937-207-4500S	72989S	E0094-011-0750	80037	E0120-016-1000S	800				

Associated Spring / Century Spring Part Numbers

Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.
E0180-024-2250	80182	E0180-034-1000S	80226S	E0240-026-2750	80275	E0240-034-0880S	80319S	E0240-041-3000	80367
E0180-024-2250S	80182S	E0180-034-1120	80227	E0240-026-2750S	80275S	E0240-034-1000	80320	E0240-041-3000S	80367S
E0180-024-2500	80183	E0180-034-1120S	80227S	E0240-026-3000	80276	E0240-034-1000S	80320S	E0240-041-3500	80368
E0180-024-2500S	80183S	E0180-034-1250	80228	E0240-026-3000S	80276S	E0240-034-1120	80321	E0240-041-3500S	80368S
E0180-026-0500	80184	E0180-034-1250S	80228S	E0240-026-3500	80277	E0240-034-1120S	80321S	E0240-041-4000	80369
E0180-026-0500S	80184S	E0180-034-1370	80229	E0240-026-3500S	80277S	E0240-034-1250	80322	E0240-041-4000S	80369S
E0180-026-0620	80185	E0180-034-1370S	80229S	E0240-026-4000	80278	E0240-034-1250S	80322S	E0240-041-4500	80370
E0180-026-0620S	80185S	E0180-034-1500	80230	E0240-026-4000S	80278S	E0240-034-1370	80323	E0240-041-4500S	80370S
E0180-026-0750	80186	E0180-034-1500S	80230S	E0240-026-4500	80279	E0240-034-1370S	80323S	E0240-041-5000	80371
E0180-026-0750S	80186S	E0180-034-1750	80231	E0240-026-4500S	80279S	E0240-034-1500	80324	E0300-031-1000	80381
E0180-026-0880	80187	E0180-034-1750S	80231S	E0240-026-5000	80280	E0240-034-1500S	80324S	E0300-031-1000S	80381S
E0180-026-0880S	80187S	E0180-034-2000	80232	E0240-026-5000S	80280S	E0240-034-1750	80325	E0300-031-1120	80382
E0180-026-1000	80188	E0180-034-2000S	80232S	E0240-029-0620	80281	E0240-034-1750S	80325S	E0300-031-1120S	80382S
E0180-026-1000S	80188S	E0180-034-2250	80233	E0240-029-0620S	80281S	E0240-034-2000	80326	E0300-031-1250	80383
E0180-026-1120	80189	E0180-034-2250S	80233S	E0240-029-0750	80282	E0240-034-2000S	80326S	E0300-031-1250S	80383S
E0180-026-1120S	80189S	E0180-034-2500	80234	E0240-029-0750S	80282S	E0240-034-2250	80327	E0300-031-1370	80384
E0180-026-1250	80190	E0180-034-2500S	80234S	E0240-029-0880	80283	E0240-034-2250S	80327S	E0300-031-1370S	80384S
E0180-026-1250S	80190S	E0180-034-2750	80235	E0240-029-0880S	80283S	E0240-034-2500	80328	E0300-031-1500	80385
E0180-026-1370	80191	E0180-034-2750S	80235S	E0240-029-1000	80284	E0240-034-2500S	80328S	E0300-031-1500S	80385S
E0180-026-1370S	80191S	E0240-018-0620	80236	E0240-029-1000S	80284S	E0240-034-2750	80329	E0300-031-1750	80386
E0180-026-1500	80192	E0240-018-0620S	80236S	E0240-029-1120	80285	E0240-034-2750S	80329S	E0300-031-2500	80389
E0180-026-1500S	80192S	E0240-018-0750	80237	E0240-029-1120S	80285S	E0240-034-3000	80330	E0300-031-2500S	80389S
E0180-026-1750	80193	E0240-018-0750S	80237S	E0240-029-1250	80286	E0240-034-3000S	80330S	E0300-031-2000	80387
E0180-026-1750S	80193S	E0240-018-0880	80238	E0240-029-1250S	80286S	E0240-034-3500	80331	E0300-031-2000S	80387S
E0180-026-2000	80194	E0240-018-0880S	80238S	E0240-029-1370	80287	E0240-034-3500S	80331S	E0300-031-2250	80388
E0180-026-2000S	80194S	E0240-018-1000	80239	E0240-029-1370S	80287S	E0240-034-4000	80332	E0300-031-2250S	80388S
E0180-026-2250	80195	E0240-018-1000S	80239S	E0240-029-1500	80288	E0240-034-4000S	80332S	E0300-031-2500	80389
E0180-026-2250S	80195S	E0240-018-1250	80241	E0240-029-1500S	80288S	E0240-034-4500	80333	E0300-031-2500S	80389S
E0180-026-2500	80196	E0240-018-1250S	80241S	E0240-029-1750	80289	E0240-034-4500S	80333S	E0300-031-2750	80390
E0180-026-2500S	80196S	E0240-018-1500	80243	E0240-029-1750S	80289S	E0240-034-5000	80334	E0300-031-2750S	80390S
E0180-029-0620	80197	E0240-018-1500S	80243S	E0240-029-2000	80290	E0240-034-5000S	80334S	E0300-031-3000	80391
E0180-029-0620S	80197S	E0240-018-2000	80245	E0240-029-2000S	80290S	E0240-037-0620	80335	E0300-031-3000S	80391S
E0180-029-0750	80198	E0240-018-2000S	80245S	E0240-029-2250	80291	E0240-037-0620S	80335S	E0300-037-0750	80392
E0180-029-0750S	80198S	E0240-018-2500	80247	E0240-029-2250S	80291S	E0240-037-0750S	80336S	E0300-037-0750S	80392S
E0180-029-0880	80199	E0240-018-2500S	80247S	E0240-029-2500	80292	E0240-037-0750S	80336S	E0300-037-1000	80393
E0180-029-0880S	80199S	E0240-018-2750	80248	E0240-029-2500S	80292S	E0240-037-1000	80338	E0300-037-1000S	80393S
E0180-029-1000	80200	E0240-018-2750S	80248S	E0240-029-2750	80293	E0240-037-1000S	80338S	E0300-037-1120	80394
E0180-029-1000S	80200S	E0240-022-0620	80249	E0240-029-2750S	80293S	E0240-037-1120	80339	E0300-037-1250	80395
E0180-029-1120	80201	E0240-022-0620S	80249S	E0240-029-3000	80294	E0240-037-1120S	80339S	E0300-037-1250	80395
E0180-029-1120S	80201S	E0240-022-0750	80250	E0240-029-3000S	80294S	E0240-037-1250	80340	E0300-037-1250S	80395S
E0180-029-1250	80202	E0240-022-0750S	80250S	E0240-029-3500	80295	E0240-037-1250S	80340S	E0300-037-1370	80396
E0180-029-1250S	80202S	E0240-022-0880	80251	E0240-029-3500S	80295S	E0240-037-1370	80341	E0300-037-1370S	80396S
E0180-029-1370	80203	E0240-022-0880S	80251S	E0240-029-4000	80296	E0240-037-1370S	80341S	E0300-037-1500	80397
E0180-029-1370S	80203S	E0240-022-1000	80252	E0240-029-4000S	80296S	E0240-037-1500	80342	E0300-037-1500S	80397S
E0180-029-1500	80204	E0240-022-1000S	80252S	E0240-029-4500	80297	E0240-037-1500S	80342S	E0300-037-1750	80398
E0180-029-1500S	80204S	E0240-022-1120	80253	E0240-029-4500S	80297S	E0240-037-1750	80343	E0300-037-1750S	80398S
E0180-029-1750	80205	E0240-022-1120S	80253S	E0240-029-5000	80298	E0240-037-1750S	80343S	E0300-037-2000	80399
E0180-029-1750S	80205S	E0240-022-1250	80254	E0240-029-5000S	80298S	E0240-037-2000	80344	E0300-037-2000S	80399S
E0180-029-2000	80206	E0240-022-1250S	80254S	E0240-031-0620	80299	E0240-037-2000S	80344S	E0300-037-2250	80400
E0180-029-21370	80206S	E0240-022-1370	80255	E0240-031-0620S	80299S	E0240-037-2250	80345	E0300-037-2250S	80400S
E0180-029-2250	80207	E0240-022-1370S	80255S	E0240-031-0750	80300	E0240-037-2250S	80345S	E0300-037-2500	80401
E0180-029-2250S	80207S	E0240-022-1500	80256	E0240-031-0750S	80300S	E0240-037-2500	80346	E0300-037-2500S	80401S
E0180-029-2500	80208	E0240-022-1500S	80256S	E0240-031-0880	80301	E0240-037-2500S	80346S	E0300-037-2750	80402
E0180-029-2500S	80208S	E0240-022-1750	80257	E0240-031-0880S	80301S	E0240-037-2750	80347	E0300-037-2750S	80402S
E0180-031-0500	80209	E0240-022-1750S	80257S	E0240-031-1000	80302	E0240-037-2750S	80347S	E0300-037-3000	80403
E0180-031-0500S	80209S	E0240-022-2000	80258	E0240-031-1000S	80302S	E0240-037-3000	80348	E0300-037-3000S	80403S
E0180-031-0620	80210	E0240-022-2000S	80258S	E0240-031-1120	80303	E0240-037-3000S	80348S	E0300-037-1750	80398
E0180-031-0620S	80210S	E0240-022-2250	80259	E0240-031-1120S	80303S	E0240-037-3250	80349	E0300-037-1750S	80398S
E0180-031-0750	80211	E0240-022-2250S	80259S	E0240-031-1250	80304	E0240-037-3250S	80349S	E0300-049-1120	80416
E0180-031-0750S	80211S	E0240-022-2500	80260	E0240-031-1250S	80304S	E0240-037-3500	80350	E0300-049-1120S	80416S
E0180-031-0880	80212	E0240-022-2500S	80260S	E0240-031-1370	80305	E0240-037-3500S	80350S	E0300-049-1250	80417
E0180-031-1000	80212S	E0240-022-2750	80261	E0240-031-1370S	80305S	E0240-037-4000	80351	E0300-049-1250S	80417S
E0180-031-1000S	80212S	E0240-022-2750S	80261S	E0240-031-1500	80306	E0240-037-4000S	80351S	E0300-049-1370	80418
E0180-031-1000SS	80212SS	E0240-026-0500	80262	E0240-031-1500S	80306S	E0240-037-4500	80352	E0300-049-1370S	80418S
E0180-031-1120	80214	E0240-026-0500S	80262S	E0240-031-1750	80307	E0240-037-4500S	80352S	E0300-049-1500	80419
E0180-031-1120S	80214S	E0240-026-0620	80263	E0240-031-1750S	80307S	E0240-037-5000	80353	E0300-049-1500S	80419S
E0180-031-1250	80215	E0240-026-0620S	80263S	E0240-031-2000	80308	E0240-037-5000S	80353S	E0300-049-1750	80420
E0180-031-1250S	80215S	E0240-026-0750	80264	E0240-031-2000S	80308S	E0240-041-0750	80355	E0300-049-1750S	80420S
E0180-031-1370	80216	E0240-026-0750S	80264S	E0240-031-2250	80309	E0240-041-0750S	80355S	E0300-049-2000	80421
E0180-031-1370S	80216S	E0240-026-0880	80265	E0240-031-2250S	80309S	E0240-041-1000	80357	E0300-049-2000S	80421S
E0180-031-1500	80217	E0240-026-0880S	80265S	E0240-031-2500	80310	E0240-041-1000S	80357S	E0300-049-2250	80422
E0180-031-1500S	80217S	E0240-026-1000	80266	E0240-031-2500S	80310S	E0240-041-1120	80358	E0300-049-2250S	80422S
E0180-031-1750	80218	E0240-026-1000S	80266S	E0240-031-2750	80311	E0240-			

Associated Spring / Century Spring Part Numbers



Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.
E0300-055-1750S	80431S	E0360-037-1750	80478	E0360-045-2000S	80522S	E0360-058-1000	80578	E0420-055-1750S	80633S
E0300-055-2000	80432	E0360-037-1750S	80478S	E0360-045-2250	80523	E0360-058-1000S	80578S	E0420-055-2000	80634
E0300-055-2000S	80432S	E0360-037-2000	80479	E0360-045-2250S	80523S	E0360-058-1120	80579	E0420-055-2000S	80634S
E0300-055-2250	80433	E0360-037-2250	80479S	E0360-045-2500	80524	E0360-058-1120S	80579S	E0420-055-2250	80635
E0300-055-2250S	80433S	E0360-037-2250S	80480	E0360-045-2500S	80524S	E0360-058-1250	80580	E0420-055-2250S	80635S
E0300-055-2500	80434	E0360-037-2250S	5983	E0360-045-2750	80525	E0360-058-1250S	80580S	E0420-055-2500	80636
E0300-055-2500S	80434S	E0360-037-2500	80481	E0360-045-3000	80526	E0360-058-1370	80581	E0420-055-2500S	80636S
E0300-055-2750	80435	E0360-037-2500S	80481S	E0360-045-3000S	80526S	E0360-058-1500	80582	E0420-055-2750	80637
E0300-055-2750S	80435S	E0360-037-2750	80482	E0360-045-3500	80527	E0360-058-1500S	80582S	E0420-055-3000	80638
E0300-055-3000	80436	E0360-037-2750S	80482S	E0360-045-3500S	80527S	E0360-058-1750	80583	E0420-055-3000S	80638S
E0300-055-3000S	80436S	E0360-037-3000	80483	E0360-045-4000	80528	E0360-058-1750S	80583S	E0500-034-1250	80639
E0360-026-1000	80437	E0360-037-3000S	80483S	E0360-045-4000S	80528S	E0360-058-2000	80584	E0500-034-1250S	80639S
E0360-026-1100S	80437S	E0360-037-3500	80484	E0360-045-4500	80529	E0360-058-2000S	80584S	E0500-034-1370	80640
E0360-026-1120	80438	E0360-037-3500S	80484S	E0360-045-4500S	80529S	E0360-058-2250	80585	E0500-034-1370S	80640S
E0360-026-1120S	80438S	E0360-037-4000	80485	E0360-045-5000	80530	E0360-058-2250S	80585S	E0500-034-1500	80641
E0360-026-1250	80439	E0360-037-4000S	80485S	E0360-045-5000S	80530S	E0360-058-2500	80586	E0500-034-1500S	80641S
E0360-026-1250S	80439S	E0360-037-4500	80486	E0360-045-5500	80531	E0360-058-2500S	80586S	E0500-034-1750	80642
E0360-026-1370	80440	E0360-037-4500S	80486S	E0360-045-5500S	80531S	E0360-058-2750	80587	E0500-034-1750S	80642S
E0360-026-1370S	80440S	E0360-037-5000	80487	E0360-045-6000	80532	E0360-058-2750S	80587S	E0500-034-2000	80643
E0360-026-1500	80441	E0360-037-5000S	80487S	E0360-045-6000S	80532S	E0360-058-3000	80588	E0500-034-2000S	80643S
E0360-026-1500S	80441S	E0360-039-1000	80488	E0360-049-1000	80533	E0360-058-3500	80589	E0500-034-2250	80644
E0360-026-1750	80442	E0360-039-1000S	80488S	E0360-049-1000S	80533S	E0360-058-3500S	80589S	E0500-034-2250S	80644S
E0360-026-1750S	80442S	E0360-039-1120	80489	E0360-049-1120	80534	E0360-058-3500S	80589S	E0500-037-1250	80645
E0360-031-0880	80444	E0360-039-1120S	80489S	E0360-049-1120S	80534S	E0360-058-4000	80590	E0500-037-1250S	80645S
E0360-031-0880S	80444S	E0360-039-1250	80490	E0360-049-1250	80535	E0360-058-4000S	80590S	E0500-037-1370	80646
E0360-031-1000	80446	E0360-039-1250S	80490S	E0360-049-1250S	80535S	E0360-058-4500	80591	E0500-037-1370S	80646S
E0360-031-1000S	80446S	E0360-039-1370	80491	E0360-049-1370	80536	E0360-058-4500S	80591S	E0500-037-1500	80647
E0360-031-1120	80447	E0360-039-1370S	80491S	E0360-049-1370S	80536S	E0360-058-5000	80592	E0500-037-1500S	80648
E0360-031-1120S	80447S	E0360-039-1500	80492	E0360-049-1500	80537	E0360-058-5000S	80592S	E0500-037-1750	80648S
E0360-031-1250	80448	E0360-039-1500S	80492S	E0360-049-1500S	80537S	E0360-058-5500	80593	E0500-037-1750S	80648S
E0360-031-1250S	80448S	E0360-039-1750	80493	E0360-049-1750	80538	E0360-058-5500S	80593S	E0500-037-2000	80649
E0360-031-1370	80449	E0360-039-1750S	80493S	E0360-049-2000	80494	E0360-058-6000	80594	E0500-037-2000S	80649S
E0360-031-1370S	80449S	E0360-039-2250	80494S	E0360-049-2000S	80494S	E0360-058-6000S	80594S	E0500-037-2250	80650
E0360-031-1500	80450	E0360-039-2250S	80495	E0360-049-2000S	80495S	E0360-058-6000S	80594S	E0500-037-2250S	80650S
E0360-031-1500S	80450S	E0360-039-2250S	80495S	E0360-049-2250	80540	E0420-037-1000S	80595S	E0500-037-2500	80651
E0360-031-1750	80451	E0360-039-2250S	80495S	E0360-049-2250S	80540S	E0420-037-1120	80596	E0500-037-2500S	80651S
E0360-031-1750S	80451S	E0360-039-2500	80496	E0360-049-2500	80541	E0420-037-1120S	80596S	E0500-037-2750	80652
E0360-031-2000	80452	E0360-039-2500S	80496S	E0360-049-2500S	80541S	E0420-037-1250	80597	E0500-037-2750S	80652S
E0360-031-2250	80453	E0360-039-2750	80497	E0360-049-2750	80542	E0420-037-1250S	80597S	E0500-037-3000	80653
E0360-031-2250S	80453S	E0360-039-3000	80498	E0360-049-2750S	80542S	E0420-037-1370	80598	E0500-037-3000S	80653S
E0360-031-2500	80454	E0360-039-3000S	80498S	E0360-049-3000	80543	E0420-037-1370S	80598S	E0500-037-3500	80654
E0360-031-2500S	80454S	E0360-041-01750	80499	E0360-049-3000S	80543S	E0420-037-1500	80599	E0500-037-3500S	80654S
E0360-031-2750	80455	E0360-041-0750S	80499S	E0360-049-3500	80544	E0420-037-1500S	80599S	E0500-037-4000	80655
E0360-031-2750S	80455S	E0360-041-1000	80500	E0360-049-3500S	80544S	E0420-037-1750S	80600	E0500-037-4000S	80655S
E0360-031-3000	80456	E0360-041-1000S	80500S	E0360-049-4000	80545	E0420-037-2000	80600S	E0500-037-4500	80656
E0360-031-3000S	80456S	E0360-041-1120	80501	E0360-049-4000S	80545S	E0420-037-2000S	80601	E0500-037-4500S	80656S
E0360-034-1000	80457	E0360-041-1120S	80501S	E0360-049-4500	80546	E0420-037-2000S	80601S	E0500-037-5000	80657
E0360-034-1120	80458	E0360-041-1250	80502	E0360-049-4500S	80546S	E0420-037-2250	80602	E0500-041-1250	80658
E0360-034-1120S	80458S	E0360-041-1370	80503	E0360-049-5000	80547	E0420-037-2500	80603	E0500-041-1250S	80658S
E0360-034-1250	80459	E0360-041-1370S	80503S	E0360-049-5500	80548	E0420-037-2500S	80603S	E0500-041-1370	80659
E0360-034-1250S	80459S	E0360-041-1500	80504	E0360-049-5500S	80548S	E0420-037-2750	80604	E0500-041-1370S	80659S
E0360-034-1370	80460	E0360-041-1500S	80504S	E0360-049-6000	80549	E0420-037-2750S	80604S	E0500-041-1500	80660
E0360-034-1370S	80460S	E0360-041-1750	80505	E0360-049-6000S	80549S	E0420-037-3000	80605	E0500-041-1500S	80660S
E0360-034-1500	80461	E0360-041-1750S	80505S	E0360-055-1000	80561	E0420-037-3000S	80605S	E0500-041-1750	80661
E0360-034-1500S	80461S	E0360-041-2000	80506	E0360-055-1000S	80561S	E0420-045-1000	80606	E0500-041-1750S	80661S
E0360-034-1750	80462	E0360-041-2000S	80506S	E0360-055-1120	80562	E0420-045-1000S	80606S	E0500-041-2000	80662
E0360-034-1750S	80462S	E0360-041-2250	80507	E0360-055-1120S	80562S	E0420-045-1120	80607	E0500-041-2000S	80662S
E0360-034-2000	80463	E0360-041-2250S	80507S	E0360-055-1250	80563	E0420-045-1120S	80607S	E0500-041-2250	80663
E0360-034-2000S	80463S	E0360-041-2500	80508	E0360-055-1250S	80563S	E0420-045-1250	80608	E0500-041-2250S	80663S
E0360-034-2250	80464	E0360-041-2500S	80508S	E0360-055-1370	80564	E0420-045-1250S	80608S	E0500-041-2500	80664
E0360-034-2250S	80464S	E0360-041-2750	80509	E0360-055-1370S	80564S	E0420-045-1370	80609	E0500-041-2500S	80664S
E0360-034-2500	80465	E0360-041-2750S	80509S	E0360-055-1500	80565	E0420-045-1370S	80609S	E0500-041-2750	80665
E0360-034-2500S	80465S	E0360-041-3000	80510	E0360-055-1500S	80565S	E0420-045-1500	80610	E0500-041-2750S	80665S
E0360-034-2750	80466	E0360-041-3000S	80510S	E0360-055-1750	80566	E0420-045-1500S	80610S	E0500-041-3000	80666
E0360-034-2750S	80466S	E0360-041-3500	80511	E0360-055-1750S	80566S	E0420-045-1750S	80611	E0500-041-3000S	80666S
E0360-034-3000	80467	E0360-041-3500S	80511S	E0360-055-2000	80567	E0420-045-1750S	80611S	E0500-041-3500	80667
E0360-034-3000S	80467S	E0360-041-4000	80512	E0360-055-2000S	80567S	E0420-045-2000	80612	E0500-041-3500S	80667S
E0360-034-3500	80468	E0360-041-4000S	80512S	E0360-055-2250	80568	E0420-045-2000S	80612S	E0500-041-4000	80668
E0360-034-3500S	80468S	E0360-041-4500	80513	E0360-055-2250S	80568S	E0420-045-2250	80613	E0500-041-4000S	80668S
E0360-034-4000	80469	E0360-041-4500S	80513S	E0360-055-2500	80569	E0420-045-2250S	80613S	E0500-041-4500	80669
E0360-034-4500	80470	E0360-041-5000	80514	E0360-055-2500S	80569S	E0420-045-2500	80614	E0500-041-4500S	80669S
E0360-034-4500S	80470S	E0360-041-5000S	80514S	E0360-055-2750	80570	E0420-045-2500S	80614S	E0500-041-5000	80670
E0360-034-4500S	80470S	E0360-045-0750	80515	E0360-055-2750S	80570S	E0420-045-2750	80615	E0500-041-5000S	80670S
E0360-034-5000	80471	E0360							

Associated Spring / Century Spring Part Numbers

Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.
E0500-045-2750	80679	E0500-063-5000S	80723S	E0650-063-4500	80811	E0750-075-2000S	80856S	E0750-115-3500	80910
E0500-045-2750S	80679S	E0500-069-1250	80736	E0650-063-4500S	80811S	E0750-075-2250	80857	E0750-115-3500S	80910S
E0500-045-3000	80680	E0500-069-1250S	80736S	E0650-063-5000	80812	E0750-075-2250S	80857S	E0750-115-4000	80911
E0500-045-3000S	80680S	E0500-069-1370	80737	E0650-063-5000S	80812S	E0750-075-2500	80858	E0750-115-4000S	80911S
E0500-045-3500	80681	E0500-069-1370S	80737S	E0650-069-1750	80813	E0750-075-2500S	80858S	E0750-115-4500	80912
E0500-045-3500S	80681S	E0500-069-1500	80738	E0650-069-1750S	80813S	E0750-075-2750	80859	E0750-115-4500S	80912S
E0500-045-4000	80682	E0500-069-1500S	80738S	E0650-069-2000	80814	E0750-075-2750S	6031	E0750-115-5000	80913
E0500-045-4000S	80682S	E0500-069-1750	80739	E0650-069-2000S	80814S	E0750-075-3000	80860	E0750-115-5000S	80913S
E0500-045-4500	80683	E0500-069-1750S	80739S	E0650-069-2250	80815	E0750-075-3000S	80860S	E0750-115-5500	80914
E0500-045-4500S	80683S	E0500-069-2000	80740	E0650-069-2250S	80815S	E0750-075-3500	80861	E0750-115-5500S	80914S
E0500-045-5000	80684	E0500-069-2000S	80740S	E0650-069-2500	80816	E0750-075-3500S	6032	E0750-115-6000	80915
E0500-045-5000S	80684S	E0500-069-2250	80741	E0650-069-2500S	80816S	E0750-075-4000	80862	E0750-115-6000S	80915S
E0500-049-1250	80685	E0500-069-2250S	80741S	E0650-069-2750	80817	E0750-075-4000S	6033	E0750-125-2000	80916
E0500-049-1250S	80685S	E0500-069-2500	80742	E0650-069-2750S	80817S	E0750-075-4500	80863	E0750-125-2000S	80916S
E0500-049-1370	80686	E0500-069-2500S	80742S	E0650-069-3000	80818	E0750-075-4500S	80863S	E0750-125-2250	80917
E0500-049-1370S	80686S	E0500-069-2750	80743	E0650-069-3000S	80818S	E0750-075-5000	80864	E0750-125-2250S	80917S
E0500-049-1500	80687	E0500-069-2750S	80743S	E0650-069-3500	80819	E0750-075-5000S	6036	E0750-125-2500	80918
E0500-049-1500S	80687S	E0500-069-3000	80744	E0650-069-3500S	80819S	E0750-075-5500	80865	E0750-125-2500S	80918S
E0500-049-1750	80688	E0500-069-3000S	80744S	E0650-069-4000	80820	E0750-075-5500S	80865S	E0750-125-2750	80919
E0500-049-1750S	80688S	E0500-069-3500	80745	E0650-069-4000S	80820S	E0750-075-6000	80866	E0750-125-2750S	80919S
E0500-049-2000	80689	E0500-069-3500S	80745S	E0650-069-4500	80821	E0750-075-6000S	80866S	E0750-125-3000	80920
E0500-049-2000S	80689S	E0500-069-4000	80746	E0650-069-4500S	80821S	E0750-085-2000	80867	E0750-125-3000S	80920S
E0500-049-2250	80690	E0500-069-4000S	80746S	E0650-069-5000	80822	E0750-085-2000S	80867S	E0750-125-3500	80921
E0500-049-2250S	80690S	E0500-069-4500	80747	E0650-069-5000S	80822S	E0750-085-2250	80868	E0750-125-3500S	80921S
E0500-049-2500	80691	E0500-069-4500S	80747S	E0750-049-2000	80823	E0750-085-2250S	80868S	E0750-125-4000	80922
E0500-049-2500S	80691S	E0500-069-5000	80748	E0750-049-2000S	80823S	E0750-085-2500	80869	E0750-125-4000S	80922S
E0500-049-2750	80692	E0500-069-5000S	80748S	E0750-049-2250	80824	E0750-085-2500S	80869S	E0750-125-4500	80923
E0500-049-2750S	80692S	E0500-075-1250	80749	E0750-049-2250S	80824S	E0750-085-2750	80870	E0750-125-4500S	80923S
E0500-049-3000	80693	E0500-075-1250S	80749S	E0750-049-2500	80825	E0750-085-2750S	80870S	E0750-125-5000	80924
E0500-049-3000S	80693S	E0500-075-1370	80750	E0750-049-2500S	80825S	E0750-085-3000	80871	E0750-125-5000S	80924S
E0500-049-3500	80694	E0500-075-1370S	80750S	E0750-049-2750	80826	E0750-085-3000S	80871S	E0850-055-2000	80925
E0500-049-3500S	80694S	E0500-075-1500	80751	E0750-049-2750S	80826S	E0750-085-3500	80872	E0850-055-2000S	80925S
E0500-049-4000	80695	E0500-075-1500S	80751S	E0750-049-3000	80827	E0750-085-3500S	80872S	E0850-055-2250	80926
E0500-049-4000S	80695S	E0500-075-1750	80752	E0750-049-3000S	80827S	E0750-085-4000	80873	E0850-055-2250S	80926S
E0500-049-4500	80696	E0500-075-1750S	80752S	E0750-049-3250	80828	E0750-085-4000S	80873S	E0850-055-2500	80927
E0500-049-4500S	80696S	E0500-075-2000	80753	E0750-049-3250S	80828S	E0750-085-4500	80874	E0850-055-2500S	80927S
E0500-049-5000	80697	E0500-075-2000S	80753S	E0750-049-3500	80829	E0750-085-4500S	80874S	E0850-055-2750	80928
E0500-049-5000S	80697S	E0500-075-2250	80754	E0750-049-3500S	80829S	E0750-085-5000	80875	E0850-055-2750S	80928S
E0500-055-1250	80698	E0500-075-2250S	80754S	E0750-055-2000	80830	E0750-085-5000S	80875S	E0850-063-2250	80929
E0500-055-1250S	80698S	E0500-075-2500	80755	E0750-055-2000S	80830S	E0750-095-2000	80885	E0850-063-2250S	80929S
E0500-055-1370	80699	E0500-075-2500S	80755S	E0750-055-2250	80831	E0750-095-2000S	80885S	E0850-063-2500	80930
E0500-055-1370S	80699S	E0500-075-2750	80756	E0750-055-2250S	80831S	E0750-095-2250	80886	E0850-063-2500S	80930S
E0500-055-1500	80700	E0500-075-2750S	80756S	E0750-055-2500	80832	E0750-095-2250S	80886S	E0850-063-2750	80931
E0500-055-1500S	80700S	E0500-075-3000	80757	E0750-055-2500S	80832S	E0750-095-2500	80887	E0850-063-2750S	80931S
E0500-055-1750	80701	E0500-075-3000S	80757S	E0750-055-2750	80833	E0750-095-2500S	80887S	E0850-063-3000	80932
E0500-055-1750S	80701S	E0500-075-3500	80758	E0750-055-2750S	80833S	E0750-095-2750	80888	E0850-063-3000S	80932S
E0500-055-2000	80702	E0500-075-3500S	80758S	E0750-055-3000	80834	E0750-095-2750S	80888S	E0850-063-3500	80933
E0500-055-2000S	80702S	E0500-075-4000	80759	E0750-055-3000S	80834S	E0750-095-3000	80889	E0850-063-3500S	80933S
E0500-055-2250	80703	E0500-075-4000S	80759S	E0750-055-3500	80835	E0750-095-3000S	80889S	E0850-075-2250	80934
E0500-055-2250S	80703S	E0500-075-4500	80760	E0750-055-3500S	6061	E0750-095-3500	80890	E0850-075-2250S	80934S
E0500-055-2500	80704	E0500-075-4500S	80760S	E0750-063-2000	80836	E0750-095-3500S	80890S	E0850-075-2500	80935
E0500-055-2500S	80704S	E0500-075-5000	80761	E0750-063-2000S	6027	E0750-095-4000	80891	E0850-075-2500S	80935S
E0500-055-2750	80705	E0500-075-5000S	80761S	E0750-063-2250	80837	E0750-095-4000S	80891S	E0850-075-2750	80936
E0500-055-2750S	80705S	E0650-055-1500	80793	E0750-063-2250S	80837S	E0750-095-4500	80892	E0850-075-2750S	80936S
E0500-055-3000	80706	E0650-055-1500S	80793S	E0750-063-2500	80838	E0750-095-4500S	80892S	E0850-075-3000	80937
E0500-055-3000S	80706S	E0650-055-1750	80794	E0750-063-2500S	80838S	E0750-095-5000	80893	E0850-075-3000S	80937S
E0500-055-3500	80707	E0650-055-1750S	80794S	E0750-063-2750	80839	E0750-095-5000S	80893S	E0850-075-3500	80938
E0500-055-3500S	80707S	E0650-055-2000	80795	E0750-063-2750S	80839S	E0750-095-5500	80894	E0850-075-3500S	80938S
E0500-055-4000	80708	E0650-055-2000S	80795S	E0750-063-3000	80840	E0750-095-5500S	80894S	E0850-075-4000	80939
E0500-055-4000S	80708S	E0650-055-2250	80796	E0750-063-3000S	80840S	E0750-095-6000	80895	E0850-075-4000S	80939S
E0500-055-4500	80709	E0650-055-2250S	80796S	E0750-063-3500	80841	E0750-095-6000S	80895S	E0850-075-4500	80940
E0500-055-4500S	80709S	E0650-055-2500	80797	E0750-063-3500S	80841S	E0750-105-2000	80896	E0850-075-4500S	80940S
E0500-055-5000	80710	E0650-055-2500S	80797S	E0750-063-4000	80842	E0750-105-2000S	80896S	E0850-075-5000	80942
E0500-055-5000S	80710S	E0650-055-2750	80798	E0750-063-4000S	80842S	E0750-105-2250	80897	E0850-075-5000S	80942S
E0500-063-1250	80711	E0650-055-2750S	80798S	E0750-063-4500	80843	E0750-105-2250S	80897S	E0850-085-2000	80944
E0500-063-1250S	80711S	E0650-055-3000	80799	E0750-063-4500S	80843S	E0750-105-2500	80898	E0850-085-2000S	80944S
E0500-063-1370	80712	E0650-055-3000S	80799S	E0750-063-5000	80844	E0750-105-2500S	80898S	E0850-085-2250	80945
E0500-063-1370S	80712S	E0650-055-3500	80800	E0750-063-5000S	80844S	E0750-105-2750	80899	E0850-085-2250S	80945S
E0500-063-1500	80713	E0650-055-3500S	80800S	E0750-063-5500	80845	E0750-105-2750S	80899S	E0850-085-2500	80946
E0500-063-1500S	80713S	E0650-055-4000	80801	E0750-063-5500S	80845S	E0750-105-3000	80900	E0850-085-2500S	80946S
E0500-063-1750	80714	E0650-055-4000S	80801S	E0750-069-2000	80846	E0750-105-3000S	80900S	E0850-085-2750	80947
E0500-063-1750S	80714S	E0650-063-1500	80802	E0750-069-2000S	80846S	E0750-105-3500	80901	E0850-085-2750S	80947S
E0500-063-2000	80715	E0650-063-1500S	80802S	E0750-069-2250	80847	E0750-105-3500S</td			

Associated Spring / Century Spring Part Numbers




Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.
E1000-063-2500S	80956S	E1000-115-2750	81002	E1000-148-4500S	81045S	E1250-115-5000	81112	E1500-177-6500S	81158S
E1000-063-2750	80957	E1000-115-2750S	81002S	E1000-148-5000	81046	E1250-115-5000S	81112S	E1500-177-7000	81159
E1000-063-2750S	80957S	E1000-115-3000	81003	E1000-148-5000S	81046S	E1250-115-5500	81113	E1500-177-7000S	81159S
E1000-063-3000	80958	E1000-115-3500	81003S	E1000-148-5500	81047	E1250-115-5500S	81113S	E1500-177-7500	81160
E1000-063-3000S	80958S	E1000-115-3500	81004	E1000-148-5500S	81047S	E1250-115-6000	81114	E1500-177-7500S	81160S
E1000-063-3250	80959	E1000-115-3500S	81004S	E1000-148-6000	81048	E1250-115-6000S	81114S	E1500-177-8000	81161
E1000-063-3250S	80959S	E1000-115-4000	81005	E1000-148-6000S	81048S	E1250-115-6500	81115	E1500-177-8000S	81161S
E1000-075-2500	80961	E1000-115-4000S	81005S	E1000-148-6500	81049	E1250-115-6500S	81115S	E1750-148-5000	81162
E1000-075-2500S	6045	E1000-115-4500	81006	E1000-148-6500S	81049S	E1250-115-7000	81116	E1750-148-5000S	81162S
E1000-075-2750	80962	E1000-115-4500S	81006S	E1000-148-8000	81051	E1250-115-7000S	81116S	E1750-148-5500	81163
E1000-075-2750S	80962S	E1000-115-5000	81007	E1000-148-8000S	81051S	E1250-115-7500	81117	E1750-148-6000	81164
E1000-075-3000	80963	E1000-115-5000S	81007S	E1000-148-9000	81052	E1250-115-7500S	81117S	E1750-148-6000S	81164S
E1000-075-3000S	80963S	E1000-115-5500	81008	E1000-148-9000S	81052S	E1250-135-3500	81120	E1750-148-6500	81165
E1000-075-3500	80964	E1000-115-5500S	81008S	E1125-085-3000	81053	E1250-135-3500S	81120S	E1750-148-6500S	81165S
E1000-075-3500S	80964S	E1000-115-6000	81009	E1125-085-3000S	81053S	E1250-135-4000	81121	E1750-148-7000	81166
E1000-075-4000	80965	E1000-115-6000S	81009S	E1125-085-3500	81054	E1250-135-4000S	81121S	E1750-148-7000S	81166S
E1000-075-4000S	80965S	E1000-115-6500	81010	E1125-085-3500S	81054S	E1250-135-4500	81122	E1750-148-7500	81167
E1000-075-4500	80966	E1000-115-6500S	81010S	E1125-085-4000	81055	E1250-135-4500S	81122S	E1750-148-7500S	81167S
E1000-075-4500S	80966S	E1000-115-7000	81011	E1125-085-4000S	81055S	E1250-135-5000	81123	E1750-148-8000	81168
E1000-075-5000	80967	E1000-115-7000S	81011S	E1125-085-4500	81056	E1250-135-5000S	81123S	E1750-148-8000S	81168S
E1000-075-5000S	80967S	E1000-115-8000	81012	E1125-085-4500S	81056S	E1250-135-5500	81124	E1750-148-9000	81169
E1000-085-2500	80968	E1000-115-8000S	81012S	E1125-085-5000	81057	E1250-135-5500S	81124S	E1750-148-9000S	81169S
E1000-085-2500S	80968S	E1000-115-9000	81013	E1125-085-5000S	81057S	E1250-135-6000	81125	E1750-148-9000S	81169S
E1000-085-2750	80969	E1000-115-9000S	81013S	E1125-085-5500	81058	E1250-135-6000S	81125S	E1750-177-5000	81170
E1000-085-2750S	80969S	E1000-125-2500	81014	E1125-085-5500S	81058S	E1250-135-6500	81126	E1750-177-5000S	81170S
E1000-085-3000	80970	E1000-125-2500S	81014S	E1125-085-6000	81059	E1250-135-6500S	81126S	E1750-177-5500	81171
E1000-085-3000S	80970S	E1000-125-2750	81015	E1125-085-6000S	81059S	E1250-135-7000	81127	E1750-177-5500S	81171S
E1000-085-3500	80971	E1000-125-2750S	81015S	E1125-085-6500	81060	E1250-135-7000S	81127S	E1750-177-6000	81172
E1000-085-3500S	80971S	E1000-125-3000	81016	E1125-085-6500S	81060S	E1250-135-7500	81128	E1750-177-6000S	81172S
E1000-085-4000	80972	E1000-125-3000S	81016S	E1125-085-7000	81061	E1250-135-7500S	81128S	E1750-177-6500	81173
E1000-085-4000S	80972S	E1000-125-3500	81017	E1125-085-7000S	81061S	E1250-148-3500	81129	E1750-177-6500S	81173S
E1000-085-4500	80973	E1000-125-3500S	81017S	E1125-105-3000	81062	E1250-148-3500S	81129S	E1750-177-7000	81174
E1000-085-4500S	80973S	E1000-125-4000	81018	E1125-105-3000S	81062S	E1250-148-4000	81130	E1750-177-7000S	81174S
E1000-085-5000	80974	E1000-125-4000S	81018S	E1125-105-3500	81063	E1250-148-4000S	81130S	E1750-177-7500	81175
E1000-085-5000S	80974S	E1000-125-4500	81019	E1125-105-3500S	81063S	E1250-148-4500	81131	E1750-177-7500S	81175S
E1000-095-2500	80975	E1000-125-4500S	81019S	E1125-105-4000	81064	E1250-148-4500S	81131S	E1750-177-8000	81176
E1000-095-2500S	80975S	E1000-125-5000	81020	E1125-105-4000S	81064S	E1250-148-5000	81132	E1750-177-8000S	81176S
E1000-095-2750	80976	E1000-125-5000S	81020S	E1125-105-4500	81065	E1250-148-5000S	81132S	E1750-177-9000	81177
E1000-095-2750S	80976S	E1000-125-5500	81021	E1125-105-4500S	81065S	E1250-148-5500	81133	E1750-177-9000S	81177S
E1000-095-3000	80977	E1000-125-5500S	81021S	E1125-105-5000	81066	E1250-148-5500S	81133S	E1750-207-5000	81178
E1000-095-3000S	80977S	E1000-125-6000	81022	E1125-105-5000S	81066S	E1250-148-6000	81134	E1750-207-5000S	81178S
E1000-095-3500	80978	E1000-125-6000S	81022S	E1125-105-5500	81067	E1250-148-6000S	81134S	E1750-207-5500	81179
E1000-095-3500S	80978S	E1000-125-6500	81023	E1125-105-5500S	81067S	E1250-148-6500	81135	E1750-207-5500S	81179S
E1000-095-4000	80979	E1000-125-6500S	81023S	E1125-105-6000	81068	E1250-148-6500S	81135S	E1750-207-6000	81180
E1000-095-4000S	80979S	E1000-125-7000	81024	E1125-105-6000S	81068S	E1250-148-7000	81136	E1750-207-6000S	81180S
E1000-095-4500	80980	E1000-125-7000S	81024S	E1125-105-6500	81069	E1250-148-7000S	81136S	E1750-207-6500	81181
E1000-095-4500S	80980S	E1000-125-8000	81025	E1125-105-6500S	81069S	E1250-148-7500	81137	E1750-207-6500S	81181S
E1000-095-5000	80981	E1000-125-8000S	81025S	E1125-105-7000	81070	E1250-148-7500S	81137S	E1750-207-7000	81182
E1000-095-5000S	80981S	E1000-125-9000	81026	E1125-105-7000S	81070S	E1500-125-4500	81138	E1750-207-7000S	81182S
E1000-095-5500	80982	E1000-125-9000S	81026S	E1125-105-7500	81071	E1500-125-4500S	81138S	E1750-207-7500	81183
E1000-095-5500S	80982S	E1000-135-2500	81027	E1125-105-7500S	81071S	E1500-125-5000	81139	E1750-207-7500S	81183S
E1000-095-6000	80983	E1000-135-2500S	81027S	E1125-125-3500	81072	E1500-125-5000S	81139S	E1750-207-8000	81184
E1000-095-6000S	80983S	E1000-135-2750	81028	E1125-125-3500S	81072S	E1500-125-5500	81140	E1750-207-8000S	81184S
E1000-095-6500	80984	E1000-135-2750S	81028S	E1125-125-4000	81073	E1500-125-5500S	81140S	E1750-207-9000	81185
E1000-095-6500S	80984S	E1000-135-3000	81029	E1125-125-4000S	81073S	E1500-125-6000	81141	E1750-207-9000S	81185S
E1000-095-7000	80985	E1000-135-3000S	81029S	E1125-125-4500	81074	E1500-125-6000S	81141S	E2000-177-10000	81193
E1000-095-7000S	80985S	E1000-135-3500	81030	E1125-125-4500S	81074S	E1500-125-6500	81142	E2000-177-10000S	81193S
E1000-095-8000	80986	E1000-135-3500S	81030S	E1125-125-5000	81075	E1500-125-6500S	81142S	E2000-177-8000	81186
E1000-095-8000S	80986S	E1000-135-4000	81031	E1125-125-5000S	81075S	E1500-125-7000	81143	E2000-177-8000S	81186S
E1000-095-9000	80987	E1000-135-4000S	81031S	E1125-125-5500	81076	E1500-125-7000S	81143S	E2000-177-9000	81187
E1000-095-9000S	80987S	E1000-135-4500	81032	E1125-125-5500S	81076S	E1500-125-7500	81144	E2000-177-9000S	81187S
E1000-095-10000	80988	E1000-135-4500S	81032S	E1125-125-6000	81077	E1500-125-7500S	81144S	E2000-177-6500	81188
E1000-095-10000S	80988S	E1000-135-5000	81033	E1125-125-6000S	81077S	E1500-125-8000	81145	E2000-177-6500S	81188S
E1000-095-12500	80989	E1000-135-5000S	81033S	E1125-125-6500	81078	E1500-125-8000S	81145S	E2000-177-7000	81189
E1000-095-12500S	80989S	E1000-135-5500	81034	E1125-125-6500S	81078S	E1500-125-8450	81146	E2000-177-7000S	81189S
E1000-095-13000	80990	E1000-135-5500S	81034S	E1125-125-7000	81079	E1500-125-8450S	81146S	E2000-177-7500	81190
E1000-095-13000S	80990S	E1000-135-6000	81035	E1125-125-7000S	81079S	E1500-125-8500	81147	E2000-177-7500S	81190S
E1000-095-13500	80991	E1000-135-6000S	81035S	E1125-125-9000	81090	E1500-125-9000S	81147S	E2000-177-8000	81191
E1000-095-13500S	80991S	E1000-135-6500	81036	E1125-125-9000S	81090S	E1500-125-9500	81148	E2000-177-8000S	81191S
E1000-095-14000	80992	E1000-135-6500S	81036S	E1125-125-9500	81091	E1500-125-9500S	81148S	E2000-177-9000	81192
E1000-095-14000S	80992S	E1000-135-7000	81037	E1125-125-9500S	81091S	E1500-128-6000	81149	E2000-177-9000S	81192S
E1000-095-14500	80993	E1000-135-7000S	81037S	E1125-125-9500	81092	E1500-128-6000S	81149S	E2000-207-10000	81201
E1000-095-14500S	80993S	E1000-135-8000	81038	E1125-125-9500S	81092S	E1500-128-6500	81150	E2000-207-10000S	81201S
E1000-095-15000									

Associated Spring / Century Spring Part Numbers

Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.
Torsion Springs									
T012-090-055L	T0-5001LS	T021-180-109L	T0-5022LS	T032-270-156L	T0-5053LS	T045-360-359R	T0-5138RS	T070-090-359L	T0-5158LS
T012-090-055R	T0-5001RS	T021-180-109R	T0-5022RS	T032-270-156R	T0-5053RS	T048-090-218L	T0-5104LS	T070-090-359R	T0-5158RS
T012-180-067L	T0-5002LS	T021-180-156L	T0-5046LS	T032-270-218L	T0-5078LS	T048-090-218R	T0-5104RS	T070-180-390L	T0-5163LS
T012-180-067R	T0-5002RS	T021-270-109L	T0-5021LS	T032-270-218R	T0-5078RS	T048-180-250L	T0-5106LS	T070-180-390R	T0-5163RS
T012-180-109L	T0-5013LS	T021-270-109R	T0-5021RS	T032-300-250L	T0-5095L	T048-180-250R	T0-5106RS	T070-180-515L	T0-5192LS
T012-180-109R	T0-5013RS	T021-270-187L	T0-5064LS	T032-360-234L	T0-5101LS	T048-180-406L	T0-5162LS	T070-180-515R	T0-5192RS
T012-270-062L	T0-5000LS	T021-270-187R	T0-5064RS	T032-360-234R	T0-5101RS	T048-270-250L	T0-5109LS	T070-270-390L	T0-5166LS
T012-270-062R	T0-5000RS	T021-360-187L	T0-5059LS	T035-090-187L	T0-5070LS	T048-270-250R	T0-5109RS	T070-270-531L	T0-5194LS
T012-270-109L	T0-5014LS	T021-360-187R	T0-5059RS	T035-090-187R	T0-5070RS	T048-270-406L	T0-5161LS	T070-270-531R	T0-5194RS
T012-270-109R	T0-5014RS	T023-090-109L	T0-5034LS	T035-120-250L	T0-5098L	T048-270-406R	T0-5161RS	T070-360-546L	T0-5196LS
T012-360-109L	T0-5016LS	T023-180-109L	T0-5028LS	T035-120-250R	T0-5098R	T048-360-406L	T0-5159LS	T070-360-546R	T0-5196RS
T012-360-109R	T0-5016RS	T023-180-109R	T0-5028RS	T035-180-187L	T0-5066LS	T048-360-406R	T0-5159RS	T072-120-500L	T0-5179L
T014-090-063L	T0-5004LS	T023-180-156L	T0-5052LS	T035-180-187R	T0-5066RS	T049-120-375L	T0-5144L	T072-120-500R	T0-5179R
T014-090-063R	T0-5004RS	T023-180-156R	T0-5052RS	T035-180-281L	T0-5113LS	T049-120-375R	T0-5144R	T072-210-500L	T0-5180L
T014-180-078L	T0-5008LS	T023-270-109L	T0-5023LS	T035-180-281R	T0-5113RS	T049-210-375L	T0-5141L	T072-210-500R	T0-5180R
T014-180-078R	T0-5008RS	T023-270-109R	T0-5023RS	T035-210-250L	T0-5096L	T049-210-375R	T0-5141R	T072-300-500L	T0-5181L
T014-180-109L	T0-5029LS	T023-270-156L	T0-5049LS	T035-210-250R	T0-5096R	T049-300-375L	T0-5143L	T072-300-500R	T0-5181R
T014-180-109R	T0-5029RS	T023-270-156R	T0-5049RS	T035-270-187L	T0-5066LS	T049-300-375R	T0-5143R	T075-090-375L	T0-5165LS
T014-270-063L	T0-5005LS	T023-360-172L	T0-5057LS	T035-270-187R	T0-5069RS	T051-090-234L	T0-5107LS	T075-090-375R	T0-5165RS
T014-270-063R	T0-5005RS	T023-360-172R	T0-5057RS	T035-270-281L	T0-5111LS	T051-090-234R	T0-5107RS	T075-180-422L	T0-5170LS
T014-270-125L	T0-5032LS	T024-120-250L	T0-5084L	T035-270-281R	T0-5111RS	T051-180-250L	T0-5110LS	T075-180-422R	T0-5170RS
T014-270-125R	T0-5032RS	T024-120-250R	T0-5084R	T035-300-250L	T0-5099L	T051-180-250R	T0-5110RS	T075-180-484L	T0-5182LS
T014-360-125L	T0-5033LS	T024-210-250L	T0-5083L	T035-300-250R	T0-5099R	T051-180-344L	T0-5142LS	T075-180-484R	T0-5182RS
T014-360-125R	T0-5033RS	T024-210-250R	T0-5083R	T035-360-312L	T0-5123LS	T051-180-344R	T0-5142RS	T075-270-500L	T0-5172LS
T015-090-062L	T0-5003LS	T024-300-250L	T0-5081L	T035-360-312R	T0-5123RS	T051-270-266L	T0-5112LS	T075-270-500R	T0-5172RS
T015-090-062R	T0-5003RS	T024-300-250R	T0-5081R	T038-090-234L	T0-5103LS	T051-270-266R	T0-5112RS	T075-270-531L	T0-5193LS
T015-180-078L	T0-5007LS	T025-090-140L	T0-5041LS	T038-090-234R	T0-5103RS	T051-270-359L	T0-5151LS	T075-270-531R	T0-5193RS
T015-180-078R	T0-5007RS	T025-090-140R	T0-5041RS	T038-120-375L	T0-5137L	T051-270-359R	T0-5151RS	T075-360-640L	T0-5216LS
T015-180-109L	T0-5020LS	T025-180-140L	T0-5038LS	T038-120-375R	T0-5137R	T051-360-406L	T0-5164LS	T075-360-640R	T0-5216RS
T015-180-109R	T0-5020RS	T025-180-140R	T0-5038RS	T038-180-218L	T0-5085LS	T051-360-406R	T0-5164RS	T078-090-406L	T0-5168LS
T015-270-078L	T0-5006LS	T025-180-203L	T0-5067LS	T038-180-218R	T0-5085RS	T054-090-296L	T0-5126LS	T078-090-406R	T0-5168RS
T015-270-078R	T0-5006RS	T025-180-203R	T0-5067RS	T038-180-312L	T0-5127LS	T054-090-296R	T0-5126RS	T078-180-453L	T0-5173LS
T015-270-109L	T0-5030LS	T025-270-140L	T0-5037LS	T038-180-312R	T0-5127RS	T054-180-312L	T0-5130LS	T078-180-453R	T0-5173RS
T015-270-109R	T0-5030RS	T025-270-140R	T0-5037RS	T038-210-312L	T0-5114L	T054-180-312R	T0-5130RS	T078-180-500L	T0-5187LS
T015-360-109L	T0-5035LS	T025-270-218L	T0-5075LS	T038-210-312R	T0-5114R	T054-180-421L	T0-5167LS	T078-180-500R	T0-5187RS
T016-120-125L	T0-5026L	T025-360-218L	T0-5075RS	T038-270-218L	T0-5077LS	T054-180-421R	T0-5167RS	T078-270-453L	T0-5176LS
T016-120-125R	T0-5026R	T025-360-218R	T0-5075RS	T038-270-218R	T0-5077RS	T054-270-312L	T0-5133LS	T078-270-453R	T0-5176RS
T016-210-125L	T0-5024L	T026-120-250L	T0-5089L	T038-270-312R	T0-5125RS	T054-270-312R	T0-5133RS	T078-270-546L	T0-5195LS
T016-210-125R	T0-5024R	T026-120-250R	T0-5089R	T038-300-312L	T0-5115L	T054-270-437L	T0-5169LS	T078-360-578L	T0-5219LS
T016-300-125L	T0-5025L	T026-210-250L	T0-5086L	T038-300-312R	T0-5115R	T054-360-453L	T0-5174LS	T078-360-578R	T0-5219RS
T017-090-093L	T0-5009LS	T026-210-250R	T0-5086R	T038-360-328L	T0-5132LS	T054-360-453R	T0-5174RS	T081-120-500L	T0-5183L
T017-090-093R	T0-5009RS	T026-300-250L	T0-5087L	T038-360-328R	T0-5132RS	T055-120-375L	T0-5146L	T081-120-500R	T0-5183R
T017-180-093L	T0-5015LS	T026-300-250R	T0-5087R	T040-090-187L	T0-5073LS	T055-120-375R	T0-5146R	T081-210-500L	T0-5185L
T017-180-093R	T0-5015RS	T028-090-156L	T0-5054LS	T040-090-187R	T0-5073RS	T055-210-375L	T0-5147L	T081-210-500R	T0-5185R
T017-180-156L	T0-5047LS	T028-090-156R	T0-5054RS	T040-120-375L	T0-5139L	T055-210-375R	T0-5147R	T081-300-500L	T0-5184L
T017-180-156R	T0-5047RS	T028-180-140L	T0-5048LS	T040-120-375R	T0-5139R	T055-300-375L	T0-5148L	T081-300-500R	T0-5184R
T017-270-093L	T0-5010LS	T028-180-140R	T0-5048RS	T040-180-218L	T0-5076LS	T055-300-375R	T0-5148R	T085-090-422L	T0-5178LS
T017-270-093R	T0-5010RS	T028-180-203L	T0-5074LS	T040-180-218R	T0-5076RS	T059-090-296L	T0-5128LS	T085-090-422R	T0-5178RS
T017-270-156L	T0-5051LS	T028-180-203R	T0-5074RS	T040-180-343L	T0-5134LS	T059-090-296R	T0-5128RS	T085-120-625L	T0-5203L
T017-270-156R	T0-5051RS	T028-270-140L	T0-5043LS	T040-180-343R	T0-5134RS	T059-120-375L	T0-5152L	T085-120-625R	T0-5203R
T017-360-140L	T0-5040LS	T028-270-140R	T0-5043RS	T040-210-312L	T0-5118L	T059-120-375R	T0-5152R	T085-180-469L	T0-5189LS
T017-360-140R	T0-5040RS	T028-270-203L	T0-5072LS	T040-270-218L	T0-5082LS	T059-180-328L	T0-5135LS	T085-180-469R	T0-5189RS
T018-090-109L	T0-5018LS	T028-270-203R	T0-5072RS	T040-270-218R	T0-5082RS	T059-180-328R	T0-5135RS	T085-180-641L	T0-5218LS
T018-090-109R	T0-5018RS	T028-360-218L	T0-5079LS	T040-270-218R	T0-5082RS	T059-180-437L	T0-5171LS	T085-180-641R	T0-5218RS
T018-180-109L	T0-5012LS	T028-360-218R	T0-5079RS	T040-270-343L	T0-5131LS	T059-180-437R	T0-5171RS	T085-210-625L	T0-5204L
T018-180-109R	T0-5012RS	T029-120-250L	T0-5088L	T040-270-343R	T0-5131RS	T059-210-375L	T0-5149L	T085-210-625R	T0-5204R
T018-180-140L	T0-5036LS	T029-210-250L	T0-5090L	T040-300-312R	T0-5116R	T059-270-328L	T0-5136LS	T085-270-500R	T0-5191LS
T018-270-109L	T0-5011LS	T029-210-250R	T0-5090R	T040-360-343L	T0-5129LS	T059-270-328R	T0-5136RS	T085-270-672L	T0-5221RS
T018-270-109R	T0-5011RS	T029-300-250L	T0-5092L	T040-360-343R	T0-5129RS	T059-270-453L	T0-5175LS	T085-270-672R	T0-5221RS
T018-270-156L	T0-5044LS	T029-300-250R	T0-5092R	T042-120-312L	T0-5120L	T059-270-453R	T0-5175RS	T085-300-625L	T0-5205L
T018-270-156R	T0-5044RS	T030-090-172L	T0-5068LS	T042-120-312R	T0-5120R	T059-300-375L	T0-5150L	T085-300-625R	T0-5205R
T018-360-156L	T0-5039LS	T030-090-172R	T0-5068RS	T042-210-312L	T0-5119L	T059-300-375R	T0-5150R	T085-360-688L	T0-5223LS
T020-090-109L	T0-5027LS	T030-180-172R	T0-5061RS	T042-300-312L	T0-5117L	T059-360-459L	T0-5177LS	T085-360-688R	T0-5223RS
T020-090-109R	T0-5027RS	T030-180-172R	T0-5061RS	T042-300-312R	T0-5117R	T059-360-459R	T0-5177RS	T092-120-625L	T0-5209L
T020-120-187L	T0-5063L	T030-180-250L	T0-5105LS	T042-300-312R	T0-5117R	T063-090-343L	T0-5145LS	T092-120-625R	T0-5209R
T020-120-187R	T0-5063R	T030-180-250R	T0-5105RS	T045-090-203L	T0-5080LS	T063-090-343R	T0-5145RS	T092-210-625L	T0-5206L
T020-180-109L	T0-5019LS	T030-270-172L	T0-5058LS	T045-090-203R	T0-5080RS	T063-120-375L	T0-5154L	T092-210-625R	T0-5206R
T020-180-109R	T0-5019RS	T030-270-172R	T0-5058RS	T045-120-312L	T0-5124L	T063-120-375R	T0-5154R	T092-300-625L	T0-5208L
T020-180-140L	T0-5042LS	T030-270-250R	T0-5097RS	T045-120-312R	T0-5124R	T063-180-359L	T0-5157LS	T092-300-625R	T0-5208R
T020-210-187L	T0-5062L	T030-360-250L	T0-5108LS	T045-180-218L	T0-5100RS	T063-180-359R	T0-5157RS	T095-090-453L	T0-5200LS
T020-210-187R	T0-5062R	T030-360-250R	T0-5108RS	T045-180-359L	T0-5153LS	T063-180-500R	T0-5186RS	T095-180-531L	T0-5198LS
T020-270-093L	T0-5017RS	T032-090-172R	T0-5065RS	T045-210-312L	T0-5122L	T063-210-375R	T0-5156L	T095-180-531R	T0-5198RS
T020-									

Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.	Associated Part No.	Century Spring Part No.
T096-120-625R	T0-5212R	T112-210-750R	T0-5232R	T125-270-1013R	T0-5255RS	U093-0045	CRV-26100	W0183-004	WAV-24750
T096-210-625L	T0-5211L	T112-300-750L	T0-5233L	T125-270-751R	T0-5242LS	U125-0088	CRV-26114S	W0242-006	WAV-24780S
T096-210-625R	T0-5211R	T112-300-750R	T0-5233R	T125-270-751R	T0-5242RS	U250-0065	CRV-26154	W0367-006	WAV-24807
T096-300-625L	T0-5210L	T115-090-594L	T0-5214LS	T125-300-750L	T0-5236L	T250-0075	CRV-25224	W0492-007	WAV-24848
T096-300-625R	T0-5210R	T115-090-594R	T0-5214RS	T125-300-750R	T0-5236R	U281-0085	CRV-26158	W0618-008	WAV-24883
T105-090-500L	T0-5197LS	T115-180-641L	T0-5222LS	T125-360-1084R	T0-5256RS	U312-0075	CRV-26170	W1004-011	WAV-24962
T105-090-500R	T0-5197RS	T115-180-641R	T0-5222RS	T135-090-666L	T0-5227LS	U375-0150	CRV-26188	W1102-012	WAV-25000
T105-120-750L	T0-5230L	T115-180-859L	T0-5249LS	T135-090-666R	T0-5227RS	U625-0210	CRV-26216	W1543-017	WAV-25038
T105-120-750R	T0-5230R	T115-180-859R	T0-5249RS	T135-120-750L	T0-5240L			W1593-018	WAV-25039A
T105-180-609L	T0-5215LS	T115-270-688L	T0-5225LS	T135-120-750R	T0-5240R			W1621-019	WAV-25043
T105-180-609R	T0-5215RS	T115-270-688R	T0-5225RS	T135-180-735L	T0-5243LS			W1819-020	WAV-25045
T105-180-813L	T0-5246LS	T115-270-938L	T0-5252LS	T135-180-735R	T0-5243RS			W2028-022	WAV-25051
T105-180-813R	T0-5246RS	T115-270-938R	T0-5252RS	T135-180-977L	T0-5254LS			W2420-025	WAV-25059
T105-210-750L	T0-5231L	T115-360-969L	T0-5253LS	T135-180-977R	T0-5254RS			W4300-045	WAV-25075
T105-210-750R	T0-5231R	T115-360-969R	T0-5253RS	T135-210-750L	T0-5239L			W4987-050	WAV-25079
T105-270-703L	T0-5226LS	T125-090-591L	T0-5217LS	T135-210-750R	T0-5239R				
T105-270-703R	T0-5226RS	T125-090-591R	T0-5217RS	T135-270-1112L	T0-5257LS				
T105-270-891L	T0-5248LS	T125-120-750L	T0-5237L	T135-270-1112R	T0-5257RS				
T105-270-891R	T0-5248RS	T125-120-750R	T0-5237R	T135-270-825L	T0-5247LS				
T105-300-750L	T0-5229L	T125-180-666L	T0-5244LS	T135-270-825R	T0-5247RS				
T105-300-750R	T0-5229R	T125-180-666R	T0-5244RS	T135-300-750L	T0-5241L				
T105-360-906L	T0-5251LS	T125-180-885L	T0-5250LS	T135-300-750R	T0-5241R				
T105-360-906R	T0-5251RS	T125-180-885R	T0-5250RS	T135-360-1188L	T0-5258LS				
T112-120-750L	T0-5235L	T125-210-750L	T0-5238L	T135-360-1188R	T0-5258RS				
T112-120-750R	T0-5235R	T125-210-750R	T0-5238R						
T112-210-750L	T0-5232L	T125-270-1013L	T0-5255LS						

Cross-Reference competitor part numbers on our website

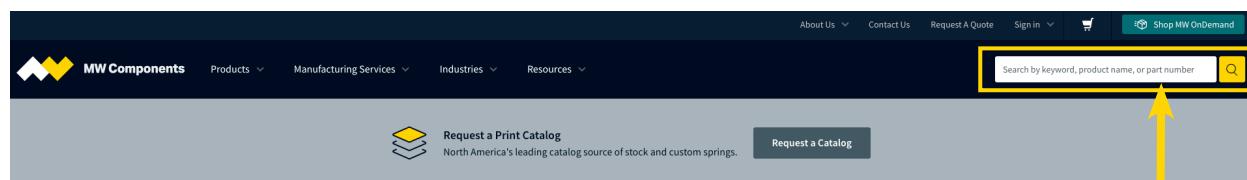

Associated Spirng/Century Spring Part Numbers

MW Components Products Manufacturing Services Industries Resources

Request a Print Catalog North America's leading catalog source of stock and custom springs. Request a Catalog

Locations

Century Spring

Welcome to Century Spring

Century Spring is a global leader in spring products, with more than 35,000 designs in stock. We are committed to providing a quality product and ensuring customer success. With stock and custom products made in the USA, we provide rapid turnaround, with many stock products shipping the same day.

Have a question? <800.237.5225> / info@centuryspring.com

Type in any competitor part number in our search box. If you don't find what you're looking for, please email us at customquote@centuryspring.com

Order online CenturySpring.com

MW Components serves the following markets and industries:

Aerospace/Aviation

Springs, wire forms, fasteners, stampings for components for engines, flight controls, propulsion, landing gear, interiors, avionics, space exploration vehicles

Agricultural/Construction Equipment

Springs, disc springs, retaining rings, machined parts and assemblies for leading manufacturers of agriculture and construction equipment

Automotive

Springs, suspension components, retaining rings and assemblies for OEM and independent aftermarket sectors of the automotive and light truck markets

Consumer Products/Power Tools

Springs, disc springs, retaining rings, stampings and machined parts for commercial and retail products used in maintenance, lawn and garden care

Energy/Oil/Gas

Springs, disc springs, machined parts and assemblies for down hole and oil rig environments including components for oil field drilling and exploration, gas turbines and steam turbines

Heavy Truck

Springs, disc springs, retaining rings, stampings and machined parts for brakes, clutches, fuel injectors, fuel pumps, engine valves, vehicle mounted antennas, hoods and doors

Industrial

Springs, disc springs, retaining rings, stampings, fasteners and machined parts for mechanical assemblies in all industries. From prototype to full production

Medical

Springs, wire forms, stampings, fasteners, machined parts, assemblies and medical components for medical devices and systems, surgical equipment and pharmaceutical applications

Military

Springs, fasteners and machined parts for suspension, vehicle mounted antennas, armored personnel carriers and MRAP vehicles

Motorsports

Springs, disc springs, fasteners and suspension components for high-performance motor racing and outdoor recreation

Transit

Springs, disc springs, retaining rings, stampings and machined parts for mass transit applications including bus, train and light rail services

Valves

Springs and disc springs for various valve and actuator assemblies and applications



Terms: California residents add 7.25% or appropriate tax for your district.
Prices are subject to change without notice. FOB Los Angeles, CA.
The consignee must file all damage claims within 30 days of receipt.



Century Spring
a division of **MW Components**



Century Spring

5959 Triumph St.,
Commerce CA 90040

Phone: 213.749.1466

Toll-free: 800.237.5225

info@centuryspring.com

CenturySpring.com

Century Spring Corp.
5959 Triumph St.,
Commerce CA 90040

Please route to:

Engineering Department Mechanical Engineer Component Engineer



MW Components

mwcomponents.com

Century Spring is a division of MW Components.
ISO 9001:2015 + AS9100 Rev. D © 2023 MW Components
Printed in the USA