

# OPERATING INSTRUCTIONS

To select TV first press the CD/TV button on the bottom row, then press the top right button (shown on screen as source) then use the large round rotary button to select TV from the on screen list (should list CD, MP3, TV)

When the “Video in motion” feature is active the Navigation may become slightly inaccurate. To solve this, DOUBLE PRESS the VOLUME button of the steering wheel controls, the unit will then display the safety message and it will no longer be possible to view TV on the move. To re-activate repeat the process.

Cars without steering wheel buttons will require an external switch added to the Purple cable of the VWAV3 (CAN) interface harness. When the cable is disconnected via the switch the unit will then display the safety message and it will no longer be possible to view TV on the move. To re-activate re-connect the Purple cable via the switch



## NAV TV (Europe) LTD

Distribution Centre  
Unit 21B Vale Business Park  
Llandow, Vale of Glamorgan  
CF71 7PF

Telephone: + 44 (0)8445 783 783  
Fax: + 44 (0)1446 77 22 47  
technical@nav.tv

**Disclaimer**  
NAV TV (Europe) Ltd is not liable for any incidental, consequential or indirect damages. In case of erratic behavior of the vehicle's electrical system please disconnect the NAV TV product and contact our technical support Team. NAV TV (Europe) Ltd does not assume liability for any diagnostic fees.



## VWAV3-CAM

AV INPUT & VIDEO IN MOTION

VW / AUDI DVD Based RNS-E

Without TV Tuner	With
Factory Reverse Camera	

NAV TV (Europe) LTD

---

e11\*72/245\*95/54\*3583\*00  
e11\*72/245\*2004/104\*4020\*00  
RoHS 2002/95/EC—2002/96/EC

## LOCATION & REMOVAL

Installation is made at the front unit for both VWAV3-CAM (CAN) and VWAV3-CAM (VIDEO) interfaces.

The unit is removed using 4 AUDI/VW removal keys.

Removing the unit without the correct keys may cause damage and problems when re-fitting the unit.



## INSTALLATION

### VWAV3-CAM (VIDEO)

Remove the **GREY** 32 way plug from the unit and insert it into the supplied **BLACK** 32 way female connector

Next insert the supplied NAVTV 32 pin **GREY** plug into the **GREY** socket on the Head Unit, see fig 001 & 002

Connect your Video lead to the **YELLOW** cable socket on the 12 way harness.

Connect your Audio leads to the **RED/WHITE** cable sockets, see fig 001

Connect the **RED** to 12v+ ignition/accessory

Connect the **BLACK** to 12v- Ground

Connect the **ORANGE** cable to a 12v+ reverse signal

Fig 001

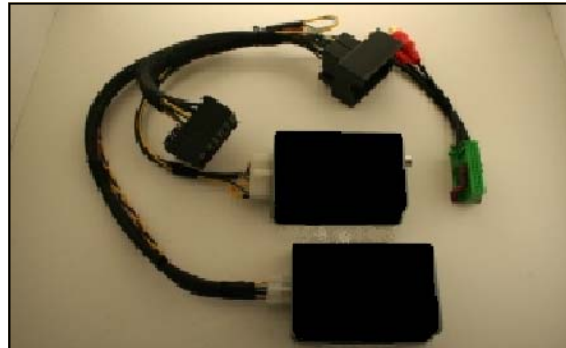


Fig 002



## INSTALLATION

### VWAV3-CAM (CAN)

Remove the "Quadlock" connector from the unit and plug it into the NAVTV harness, next plug the NAVTV harness into the unit.

Any additional plugs that are inserted into the car's "Quadlock" connector will have to be removed and inserted into the NAVTV "Quadlock" connector as shown in fig 004 below.

Fig 004

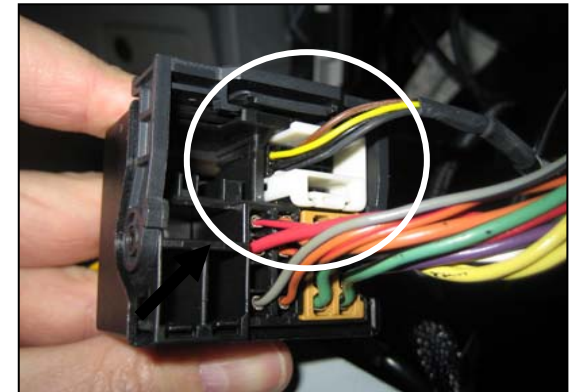


Fig 003

