

OPERATING INSTRUCTIONS

To select your added A/V source, press the “MEDIA” button on the left hand side of the radio unit



Next touch the screen to bring up the video menu, then select “TV” from the on screen buttons

When the interface is fitted the “video in motion” feature will be permanently active, there is no procedure to activate or de-activate the feature.



NAV TV (Europe) LTD

Distribution Centre
Unit 21B Vale Business Park
Llandow, Vale of Glamorgan
CF71 7PF

Telephone: + 44 (0)8445 783 783
Fax: + 44 (0)1446 77 22 47
technical@nav.tv



VWAV-510

AV INPUT & VIDEO IN MOTION

ALL VW / SKODA / SEAT

With touch screen RNS-510

NAV TV (Europe) LTD

Disclaimer
NAV TV (Europe) Ltd is not liable for any incidental, consequential or indirect damages. In case of erratic behavior of the vehicle's electrical system please disconnect the NAV TV product and contact our technical support Team. NAV TV (Europe) Ltd does not assume liability for any diagnostic fees.

e11*72/245*95/54*3583*00
e11*72/245*2004/104*4020*00
RoHS 2002/95/EC—2002/96/EC

LOCATION & REMOVAL

Installation is made at the front unit for both VWAV-510 (CAN) and VWAV-510 (VIDEO) interfaces.

For Touareg the unit is removed using 4 AUDI/VW removal keys. Removing the unit without the correct keys may cause damage and problems when re-fitting the unit.



For all other models (with SD Card slot at centre bottom) remove the trim that surrounds the unit using a trim tool and remove four screws to remove the unit



INSTALLATION

VWAV-510 (VIDEO)


Insert the supplied 26 pin **BLACK** plug into the **BLACK** socket on the Head Unit (**Red oval in fig01 below**)

Connect your Video lead to the socket on the Interface,

Connect your Audio leads to the **RED/WHITE** cable sockets,

Connect the RED to 12v+ ignition/accessory

Connect the BLACK to 12v- Ground

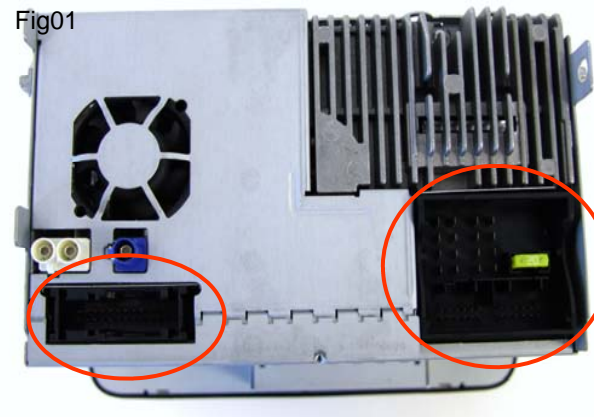

INSTALLATION

VWAV-510 (CAN)

Remove the "Quadlock" connector from the unit and plug it into the supplied harness

Next plug the supplied harness into the unit.

Any additional plugs that are inserted into the car's "Quadlock" connector will have to be removed and Inserted into the supplied "Quadlock" connector as shown in fig02 below.

