

VIMCANROV-LR

VIDEO IN MOTION RANGE ROVER SPORT / LR3 With TV Tuner

NAV TV (Europe) LTD



NAV TV (Europe) LTD

Distribution Centre Unit 21B Vale Business Park Llandow, Vale of Glamorgan CF71 7PF

Telephone: + 44 (0)8445 783 783 + 44 (0)1446 77 22 47 Fax:

technical@nav.tv

LOCATION & REMOVAL

Installation is made at the radio.

Remove the radio surround trims and the radio top trim, for sport, pull forward the leather side trims that cover the bottom screws of the air vents (circled below)

Remove the 4 screws holding the air vents and re move ,

Remove the screen.

Access is now available to the rear of the radio to connect the supplied loom.

Locate the plug in the radio shown in fig 2.






INSTALLATION

There is no need to remove the Radio

Plug the black plug from the radio unit into the female side of the supplied harness, then plug in the male side of the supplied harness to the radio unit. Plug in and mount the interface.

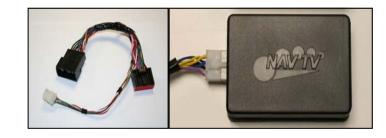

The GREEN/PURPLE cable (pin 5) can be cut and an external switch added if you wish to deactivate the "video in motion" feature

OPERATING INSTRUCTIONS

If you have installed the NAVTV "video in motion" interface with an external switch to activate and de activate the feature the switch should be in the on position for the TV Tuner to be viewed whilst in motion.

If you have not chosen to use an external switch on the cable the "video in motion" feature will be permanently active.

