



NAV-INNIS1C

VIDEO INPUT

NISSAN Navara, Pathfinder and 350Z

NAV TV (Europe) LTD



NAV TV (Europe) LTD

Distribution Centre
Unit 21B Vale Business Park
Llandow, Vale of Glamorgan
CF71 7PF

Telephone: + 44 (0)8445 783 783
Fax: + 44 (0)1446 77 22 47
technical@nav.tv


Disclaimer
NAV TV (Europe) Ltd is not liable for any incidental, consequential or indirect damages. In case of erratic behavior of the vehicle's electrical system please disconnect the NAV TV product and contact our technical support Team. NAV TV (Europe) Ltd does not assume liability for any diagnostic fees.

e11*72/245*95/54*3583*00
RoHS 2002/95/EC—2002/96/EC

LOCATION & REMOVAL

All the wires can be accessed at the **SCREEN** which is located in the centre dash.

Interface diagram

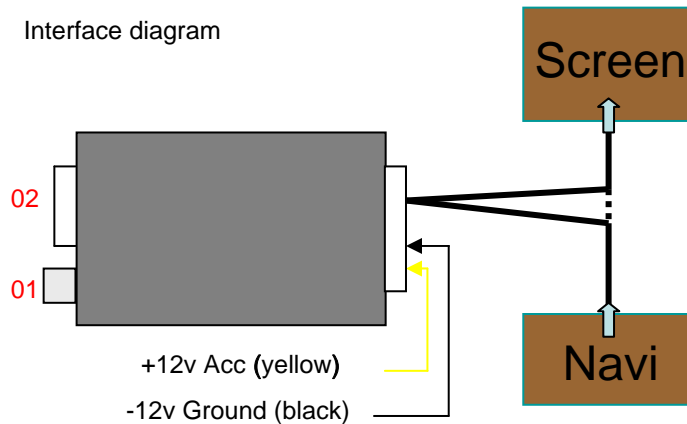

INSTALLATION

NAVARA / PATHFINDER / 350z

Locate the white plug at the Screen unit, remove the plug from the unit and insert it into the supplied, white harness socket.

Insert the supplied harness, black plug into the Screen unit, plug in and mount the interface and carry out other connections;

Other connections (on all cars)

BLUE to 12v+ to activate second video input



OPERATING INSTRUCTIONS

The first video input is auto video sensing, when your additional source is switched on the picture will override the navigation map picture. It will revert back to the navigation picture when your source is switched off.

The second input is activated when the Blue cable is made live (adding a 12v+ supply) This input will override the additional video source or the navigation map when activated.