LOCATION & REMOVAL

Installation is made at the Command unit, the unit will need to be removed and disconnected from the car, ensure the vehicle is off and the key is removed.

Removing the COMMAND unit

ML example,

Open the ashtray door and remove two screws holding the ashtray, close the ashtray, unplug and remove.

Next pull the "climate control" trim below the Command unit (trim clips only) unplug and remove.

Remove the two screws securing the silver Command unit locking tabs and slide the locking tabs down to unlock the Command unit.







MERAV-NTG3 INTERFACE PROGRAMS

THERE ARE TWO PROGRAMS AVAILABLE FOR THE NTG3 INTERFACE (loaded via USB)

MERAV-

COMPATIBLE WITH GL / ML / R CLASS MERCEDES *COMPATIBLE WITH CLS / E / SL / SLK CLASS MERCEDES*


INTERFACE PROGRAMS CAN BE DOWNLOADED AT

www.nav.tv

OPERATING INSTRUCTIONS

To activate Rear View Camera (For vehicles without a factory fitted camera); With the Brake pedal depressed and the engine running, engage reverse gear.

To Activate AUX Audio; Select "Video" then select "Aux"



To set Active Audio Source For the Rear;

Select the source name at the bottom-left of the screen

(for example "DVD-Video")

Select "Active Audio Source For The Rear"



Selected Audio source and DVD / AUX Video are now available for rear headphones and rear screens (if installed)

To Activate "Video In Motion" for GL / ML / R Class

Double Click the "Voice off button Repeat to de-activate "Video In Motion"

NOTE; Navigation does not track whilst "video in motion" is active






To Activate "Video In Motion" for E / CLS / SL Class Press "VOL UP" and "SEEK UP' simultaneously Repeat to de-activate "Video In Motion"


NOTE; Navigation does not track whilst "video in motion" is active





INSTALLATION

- Unplug the factory 40 way power connector from the radio.
- Remove the Optical Fibre connector from the factory plug and insert it into the Male side of the supplied 40 Way harness. (repeat for Black and White 12-way plugs if present)
- Plug in the factory Male 40 way harness into the female of the supplied 40 way harness, and connect the *MERAV-NTG3* interface.
- If you are installing a Rear View Camera, plug the supplied Video cable into the GREEN Fakra socket.
- Plug the supplied A/V harness into the BLACK 18-pin socket. 5 Connect the A/V OUT, AUX VIDEO IN, Secondary REAR OUT and REAR AUDIO IN as required. Factory AUX 3.5 jack is used for Audio in

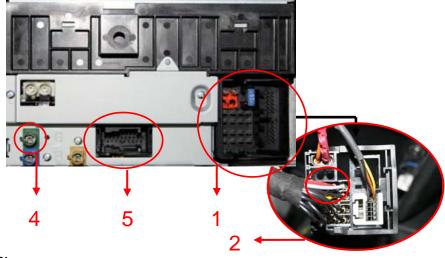

Note:

The 3.5mm jack in the glove-box is shared for both AUX modes, AUX Audio and Audio of AUX A/V. If you are installing an additional A/V source such as TV Tuner or DVD Player etc, the Factory AUX Audio port will need to be used. You may use the secondary AUX Audio labelled REAR in the Audio menu as a replacement.

PROGRAMMING

Note: Prior to programming, turn off the vehicle and remove the key for 30 seconds, Then turn the key to FULL IGNITION ON (Not Running). Be sure that the Cluster display is in AUDIO MODE. During programming, the radio screen will display DIAG-NOSIS, Then restart.

REAR VIEW CAMERA GL/ML/R (Press and hold for 6 seconds) ON

GL/ML/R



REAR OUT



(Press and hold for 6 seconds)





AUX VIDEO (Press and hold for 6 seconds) *GL/ML/R* ON **OFF**





FEATURES *E/CLS/SL* (Press and hold for 30 seconds) ON







N/A

Programming for 2008 E / CLS / SL models with no centre button

Prior to programming, turn off the vehicle and remove the key for 30 seconds, Then turn the key to FULL IGNITION ON (Not Running). During programming, the radio screen will display DIAGNOSIS, Then restart.

REAR VIEW CAMERA



REAR OUT ON





(Press and hold for 6 seconds)



(Press and hold for 6 seconds)



"VIDEO IN MOTION"

NOTE; Navigation does not track whilst "video in motion" is active



MERAV-NTG3



Distribution Centre Unit 21B Vale Business

Telephone: + 44 (0)8445783 783

REAR CAMERA / AV INPUT / VIDEO IN MOTION / VIDEO OUTPUT MERCEDES 2008> GL/ML/R/E/CLS/SL/SLK

NAV TV (Europe) LTD