2.2 inch ESP32 module
ESP32-2432S022N
ESP32-2432S022C

List

Product description

This LCD module uses ESP32-WROOM-32 module as the main control, the main control is a dual-core MCU, integrated WI-FI and Bluetooth functions, the main frequency can reach 240MHz, 520KB SRAM, 448KB ROM, Flash size is 4MB, The display resolution is 240x320, Capacitive touch or no touch. The module includes LCD display screen, backlight control circuit, touch screen control circuit, speaker drive circuit, TF card interface, serial interface, this module supports development in arduino IDE, ESP IDE, Micropython and Mixly.

Features

●2.2-inch color screen, support 16 BIT RGB 65K color display, display rich colors

●240X320 resolution

●The sample program has been programmed in the factory and can be plugged in

●With TF card slot for easy expansion storage

●Provide arduino library functions and sample programs to facilitate rapid secondary development

●Support one-click download program

●Military-grade process standards, long-term stable work

●Supports lithium battery power supply, supports both charging and discharging, and has over charging and over discharging protection
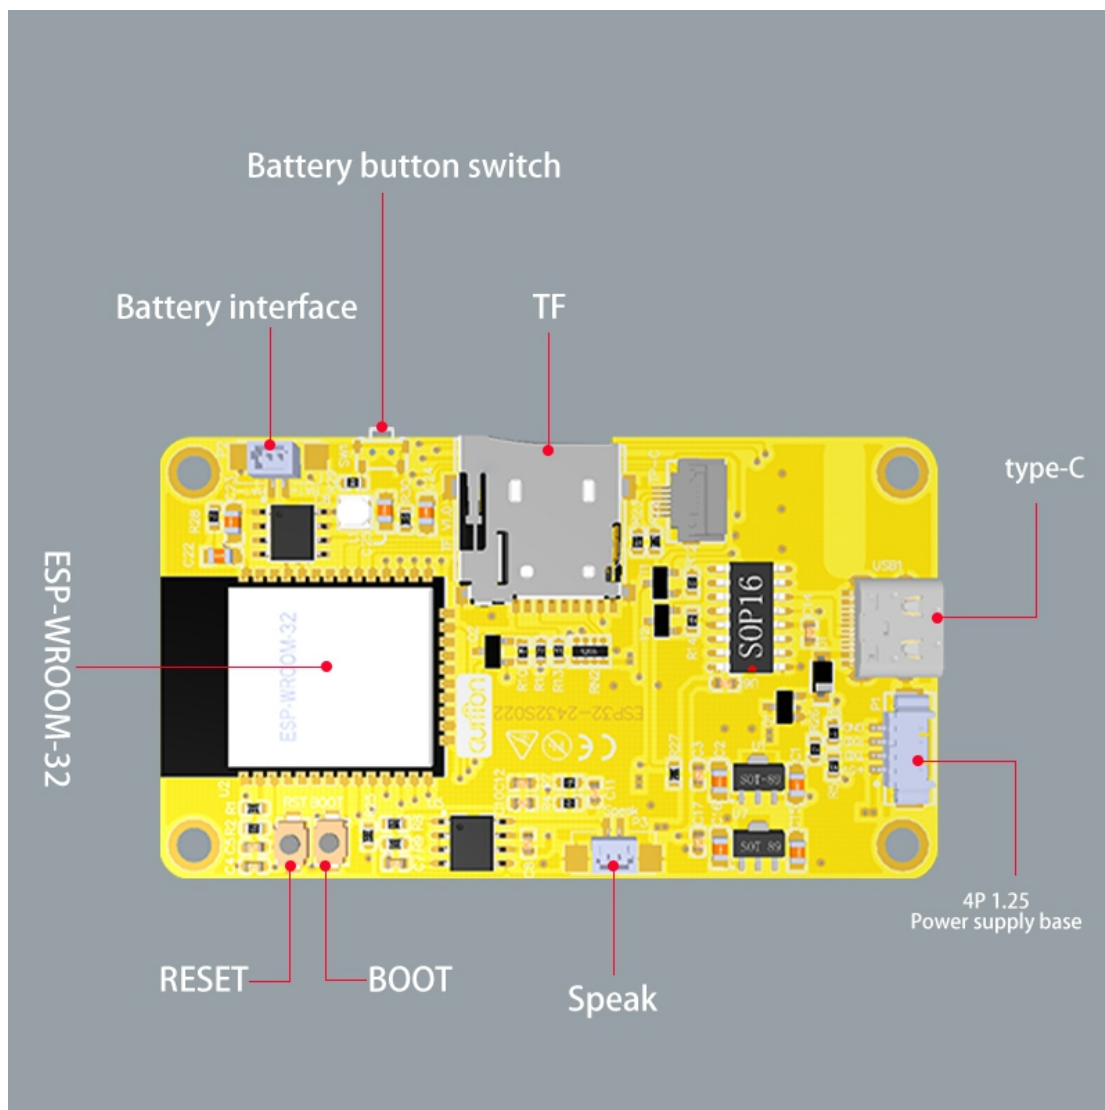
Product parameters

Name	Describe	Remark
Display color	RGB 65K color	
SKU	without touch：ESP32-2432S022N Capacitive touch：ESP32-2432S022C	
Size	2.2 inch	
Type	TFT	
Driver chip	ST7789	
Resolution	240*320(Pixel)	
Effective display area	44.6*33.5(mm)	
Module size	70.5*40.2(mm)	
View	>60°	
Operating temperature	-20℃~70℃	
storage temperature	-30℃~80℃	
Operating Voltage	5V	
Power consumption	About 100mA	
Product weight	About 35g	

Interface Description

Product Size