
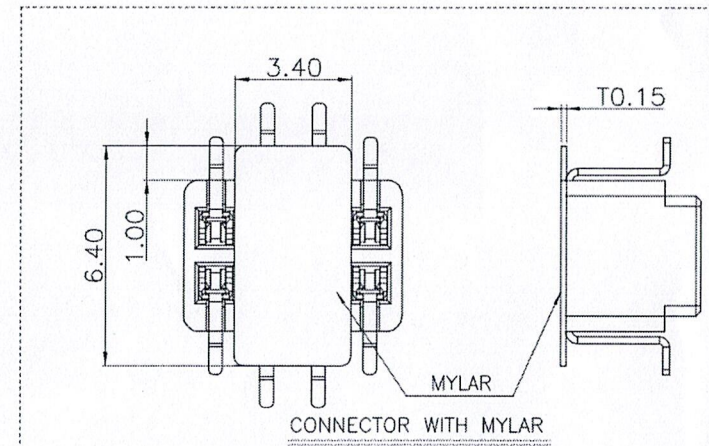



Agay 16/6/2023
CUSTOMER

NOTES:

1. MATERIALS:
 - 1-1. HOUSING: THERMOPLASTICS; UL94V-0; NATURAL COLOR
 - 1-2. TERMINALS: COPPER ALLOY;
2. PLATING:
 - 2-1. TERMINALS: MATTE TIN
3. ELECTRICAL PERFORMANCE:
 - 3-1. INSULATION RESISTANCE: $100\text{M}\Omega$ MIN
 - 3-2. DIELECTRIC WITHSTANDING VOLTAGE:
500V AC R.M.S./1MINUTE
 - 3-3. CONTACT RESISTANCE: $60\text{m}\Omega$ MAX (INITIAL)
 $100\text{m}\Omega$ MAX (AFTER LIFE TEST)
4. ENVIRONMENTAL CHARACTERISTICS:
 - 4-1. STORAGE TEMPERATURE RANGE: $-10^{\circ}\text{C} \sim +50^{\circ}\text{C}$
HALF A YEAR
 - 4-2. OPERATING TEMPERATURE RANGE: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
5. ROHS COMPLIANT

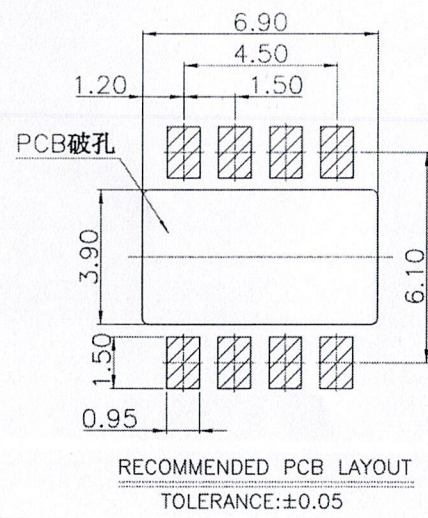


2

1

YAYLAR:
:HAVE
YAYLAR
:WITHOUT
YAYLAR

厦门广泓工贸有限公司

APPROVALS		DATE	UNLESS OTHERWISE SPECIFIED TOLERANCE		PRODUCT MODEL:	PART NO.		
DESIGN	IVES	21.05.24	长度尺寸	角度	F2014	PART NO. (OLD)	GL2W004SFR-1.5-1003-M	
CHECKED			X. ± 0.80	X. $\pm 2^\circ$	TITLE:	DWG NO.	021-0504-002	SHEET:10F1
			.X ± 0.40	.X $\pm 1^\circ$	G15母端弯脚 矮款	SIZE:A4	UNIT:mm	
APPROVED	CHEN	21.05.24	.XX ± 0.25	.XX $\pm 0.5^\circ$				