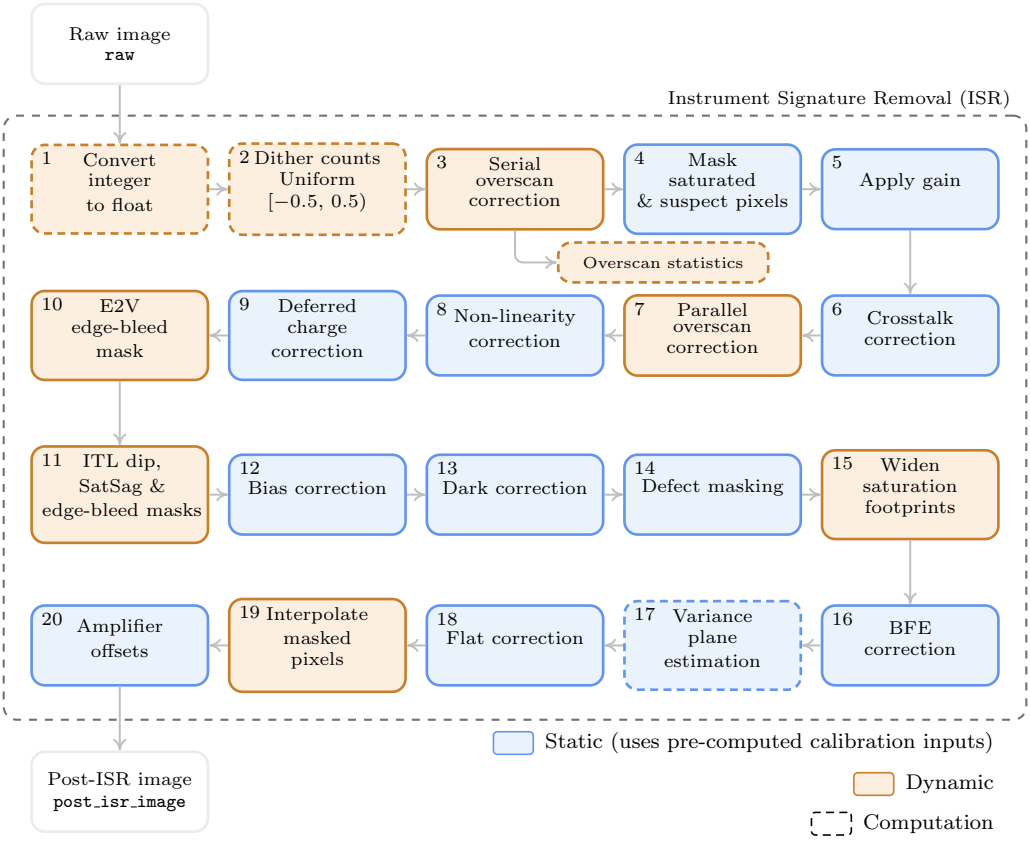

Raw image
raw
Instrument Signature Removal (ISR)
1 Convert integer to float
2 Dither counts Uniform [−0.5, 0.5)
3 Serial overscan correction
4 Mask saturated & suspect pixels
5 Apply gain
Overscan statistics
10 E2V edge-bleed mask
9 Deferred charge correction
8 Non-linearity correction
7 Parallel overscan correction
6 Crosstalk correction
11 ITL dip, SatSag & edge-bleed masks
12 Bias correction
13 Dark correction
14 Defect masking
15 Widen saturation footprints
20 Amplifier offsets
19 Interpolate masked pixels
18 Flat correction
17 Variance plane estimation
16 BFE correction
Post-ISR image
post_isr_image
Static (uses pre-computed calibration inputs)
Dynamic
Computation