POLITECNICO DI MILANO

School of Industrial and Information Engineering

Computer Science and Engineering



TRACKME DD Design Document

Software Engineering 2 Project

The project was made by

Luca Alessandrelli 846260 Andrea Caraffa 919970 Andrea Bionda 921082

Version 1.0 - 2018/2019

Deliverable: DD

Title: Design Document

Authors: Luca Alessandrelli, Andrea Caraffa, Andrea Bionda

Version: 1.0

Date: 23-November-2018

Download page: https://github.com/lucaalessandrelli/AlessandrelliCaraffaBionda.git

Copyright: Copyright © 2018, Luca Alessandrelli, Andrea Caraffa, Andrea

Bionda – All rights reserved

Contents

14	bie o	Contents	3
1	Intr	oduction	4
	1.1	Purpose	4
	1.2	Scope	4
	1.3	Definitions, Acronyms, Abbreviations	4
	1.4	Revision History	4
	1.5	Document Structure	4
2	Arcl	hitectural Design	5
	2.1	Overview	5
	2.2	Component View	6
		2.2.1 Component Diagram	6
		2.2.2 Entity Relationship Diagram	9
	2.3	Deployment View	10
	2.4	Runtime View	10
		2.4.1 Individual Information Request	11
		2.4.2 Send Ambulance Request	12
		2.4.3 Spectate to a Run	13
	2.5	Component Interfaces	14
	2.6	Selected Architectural Styles and Patterns	16
	2.7	Other Design Decisions	17
3	Usei	r Interface Design	18
4	Req	uirements Traceability	26
5	Imp	olementation, Integration and Test Plan	27
6	Effo	ort Spent	28
U	Liio	6.0.1 Luca Alessandrelli	28
		6.0.2 Andrea Caraffa	29
		6.0.3 Andrea Bionda	30
7	Refe	erence Documents	31


1 Introduction

- 1.1 Purpose
- 1.2 Scope
- 1.3 Definitions, Acronyms, Abbreviations
- 1.4 Revision History
- 1.5 Document Structure

2 Architectural Design

2.1 Overview

The TrackMe services are built on a client-server structure, this way the system is organized through abstraction levels. We chose to adopt a 3-tier architecture:

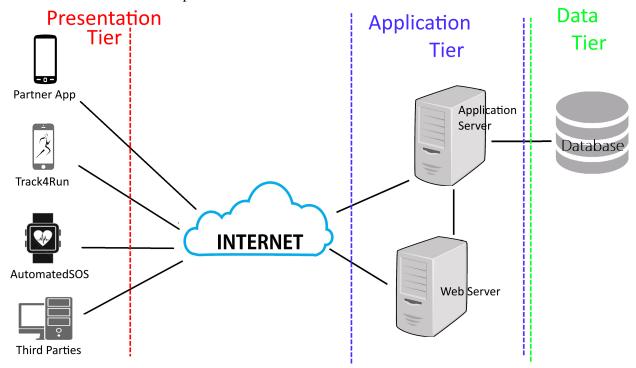

• Presentation Tier

This layer makes the interaction possible between the user and the system. Here the user sees all the information provided by the system in a easily way to understand them.

• Application Tier

This layer is managed almost totally by Data4Help service that is in charge of:

- store data incoming from the external;
- collect data information from database in order to execute Third parties' requests;
- also generates data statistics on data collected;
- send to third parties requested data.

Moreover even AutomatedSOS has logic application in order to continuously monitor users' health status.

• Data Tier

In this layer all the sensible users' data (location, health status) are stored into Databases and are retrieved by the application tier in order to do statistics and answer third parties' requests.

More specifically Data4Help manage the data and core logic sections while AutomatedSOS and Track4Run manage the presentation section. Actually, a small part of application tier is also present in AutomatedSOS, this is due to the fact that the Health Monitoring process requires to be executed as fast as possible.

2.2 Component View

2.2.1 Component Diagram

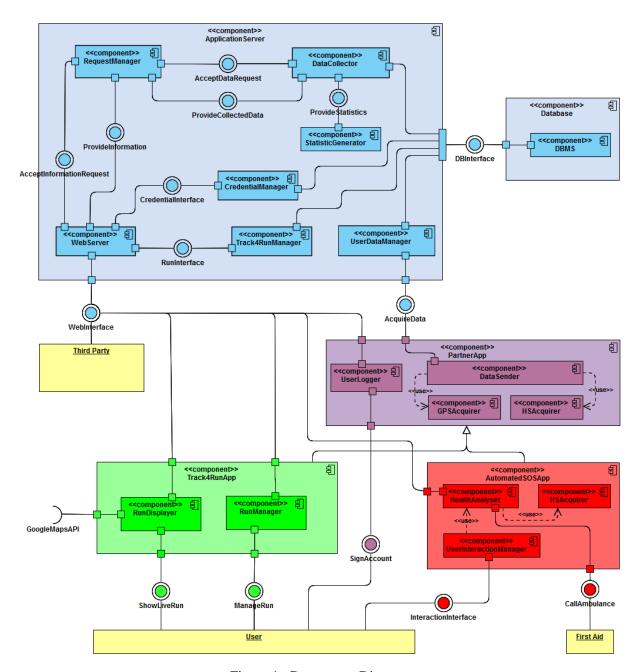


Figure 1: Component Diagram

Component diagram description

- 1 **ApplicationServer** This large component is in charge of managing Data4Help services like storing and providing, for interested companies, users' data such as GPS location and daily Health Status. Moreover it manages run information for Track4Run application.
 - 1.1 **WebServer:** In order to accept requests and supply information to whoever needs them, this component offer a friendly web interface to simplify these operations.

- 1.2 **RequestManager:** In order to support the web server in its job, this component manages all the incoming requests: it sorts them per urgency, it wraps the requests in a smart data structure and sends it to the DataCollector. Also it unwraps the answers from the Data Collector and it continuously generates data exchange if a live acquisition is active.
- 1.3 DataCollector: This component communicates with the Database in order to retrieve information and supply them to the RequestManager. In order to perform these operations whenever the DataCollector receives requests from the RequestManager, it unwraps them, creates a query and sends it to the Database; once the Database answered the query, the DataCollector should wrap the answer and provide it to the RequestManager. Moreover if statistics on data are needed the DataCollector also sends data to the StatisticGenerator which will answer with the statistic of interest.
- 1.4 **StatisticGenerator:** This component generates statistics on data provided by the DataCollector such as arithmetic mean, variance from average, standard deviation and median.
- 1.5 **UserManager:** This component communicates with users' device in order to store into the Database data automatically collected by applications.
- 1.6 **Track4RunManager:** This component communicates with the Track4Run application in order to store into the database all the information about promoted run events, all the lists of athletes participating to runs and so on.
- 1.7 **CredentialManager:** This component communicates with the WebServer in order sign up/in users to the system and to check whether the credentials inserted by a user that wants to log in are correct or not.
- 2 **Database** This component is in charge of physically storing data and organize them in a smart way according to DBMS rule, moreover it allows the access to those data.
 - 2.1 **DBMS:** This component is in charge of storing all the data involving the system like users' parameters, third parties' requests and races' information generated by the Track4Run application.
- 3 **PartnerApp:** This component describes how the partner applications of TrackMe are structured, from the components in charge of retrieving raw data from the device's API, to the components in charge of communicating with the Main Server. The PartnerApp component is extended by all the partner applications that want to exploit Data4Halp service, so even by AutomatedSOS and Track4Run.
 - 3.1 **GPSAcquirer:** This component acquires the user's GPS location at constant time periods.
 - 3.2 **HSAcquirer:** This component acquires hearth rate, blood pressure and calories consumed from user's device at constant time periods.
 - 3.3 **UserLogger:** This component offers to the user the possibility to sign up/in. For this reason it is in charge of showing the data policy and acquiring all the credentials inserted during registration. Moreover it has to communicate with the WebServer in order to forward the sign up/in request.
 - 3.3 **DataSender:** This component exploits GPSAcquirer and HSAcquirer in order to provide to the UserManager component all the retrieved data.
- 4 **AutomatedSOSApp:** This component extends all that is specified in the PartnerApp component to exploit all its features. AutomatedSOS component has to use the HSAcquirer in order to check health status parameters and call the First Aid whenever it is required.

- 4.1 **HealthAnalyser:** This component exploits HSAcquirer features in order to continuously analyze health parameters, compare the last acquired data with historical ones to improve the analyzing process, and last, it checks data in order to prevent user's diseases and call an ambulance whenever such parameters are below a certain threshold compiling and providing a special report to First Aid.
- 4.2 **HSAcquirer:** This component acquires hearth rate, blood pressure and calories consumed from user's device at constant time periods.
- 4.3 **UserInteractionManager:** This component gives to the user the possibilities to see his/her current or historical health status, to set preferences, and to get a feedback message whenever an ambulance has been sent to his/her location.
- 5 **Track4RunApp:** This component extends all that is specified in the PartnerApp component to exploit all its features. Track4Run component will also provide to users the possibility to select and spectate a run, allow promoters to create and manage a run and last allow athletes to enroll to a given run.
 - 5.1 **RunDisplayer:** This internal component is in charge of providing a human interface to the user that allows him to specify the run he wants to spectate and then shows the position of all the athletes in that particular run exploiting GoogleMapsAPI.
 - 5.2 **RunManager:** This internal component provides to the user the possibility to promote a run specifying fields like date, path, name, maximum number of participants and description. Moreover a promoter can invite specific athletes providing their fiscal code.

8

2.2.2 Entity Relationship Diagram

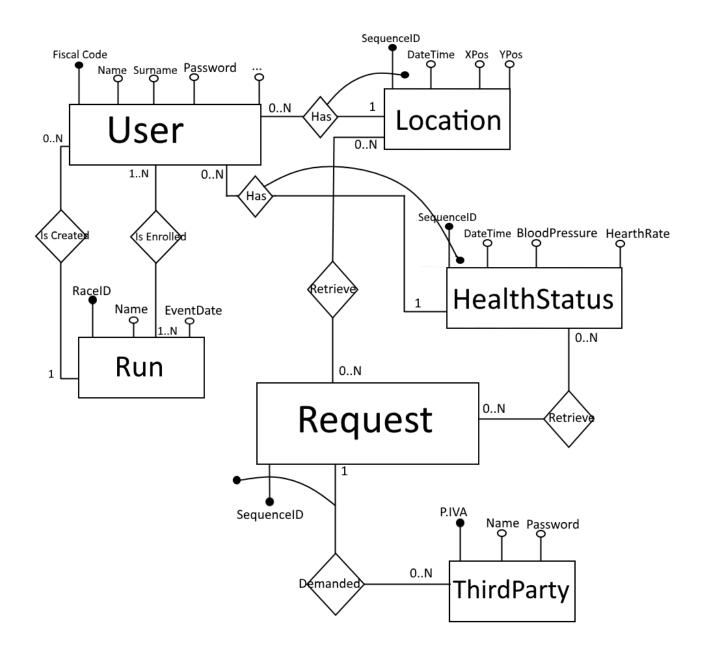


Figure 2: Entity Relationship Diagram Diagram.

2.3 Deployment View

The following Deployment Diagram captures the topology of the system's hardware. The SmartphoneApp and SmartWatchApp (Presentation Tier) communicate to the Application Server through RMI, while the WebBrowser communicates to the WebServer through HTTP protocol. The Application Server (Application Tier) communicates to the Database Server (Data Tier) through JDBC.

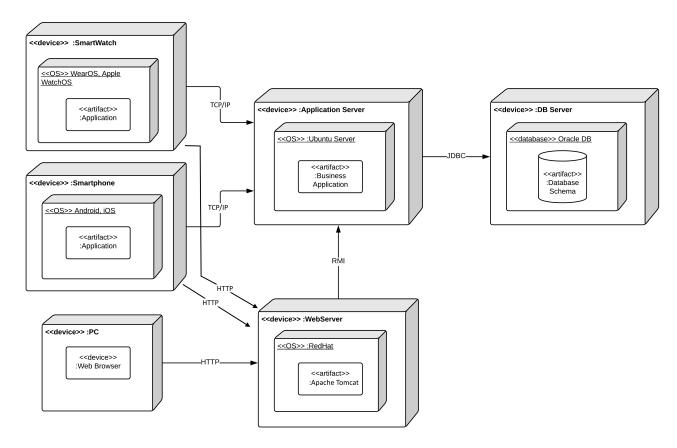


Figure 3: Deployment Diagram.

2.4 Runtime View

In this section several Sequence Diagrams are shown in order to point up the interaction among components and their behavior in particular scenarios.

2.4.1 Individual Information Request

The following Sequence Diagram shows the interaction between the components when a third party made a request to obtain individual information. Since the individual's security number provided by the third party in the request form cannot be associate to any real user (incorrect security number) or can be associate to a user that has not accept individual request privacy policy, the third party could get three different answers from the system.

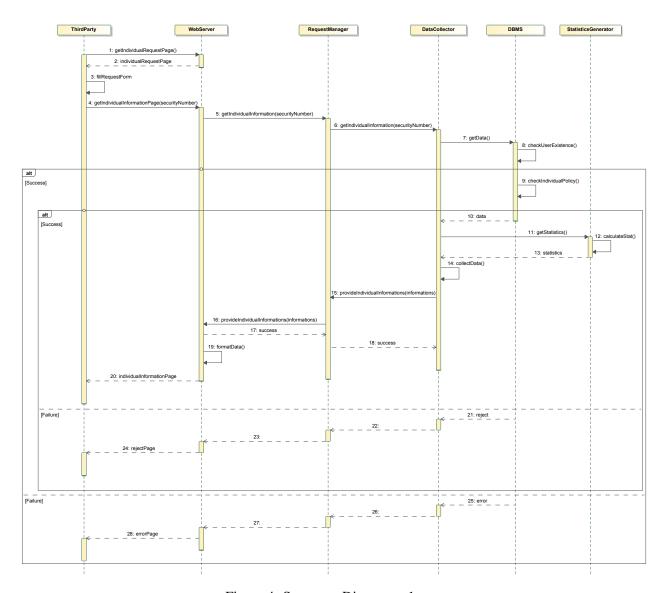


Figure 4: Sequence Diagram n.1.

2.4.2 Send Ambulance Request

In the below diagram is shown the interaction that the components have between each other to send an ambulance request to the first aid. The data retrieved by the GPS Acquirer and HealthStatus Acquirer both sent to Data4Help and sent to the HealthAnalyzer.

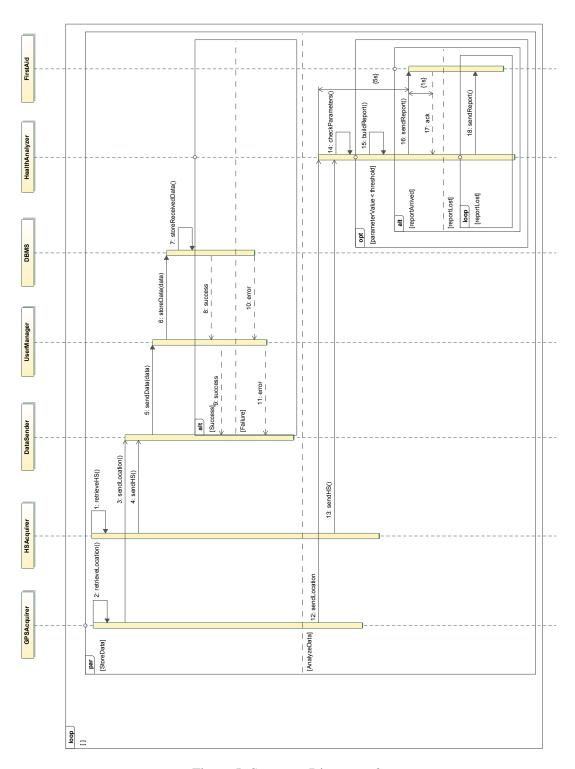


Figure 5: Sequence Diagram n.2.

2.4.3 Spectate to a Run

The next Sequence Diagram represents the interaction that the components have between each other to show the live positions during a run event, the chart starts at the moment when the user, already logged in, select a specific run to spectate.

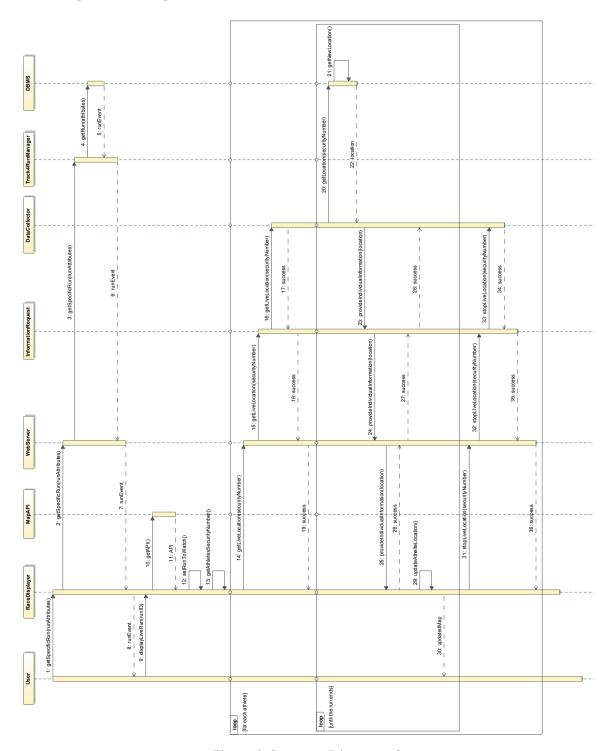


Figure 6: Sequence Diagram n.3.

2.5 Component Interfaces

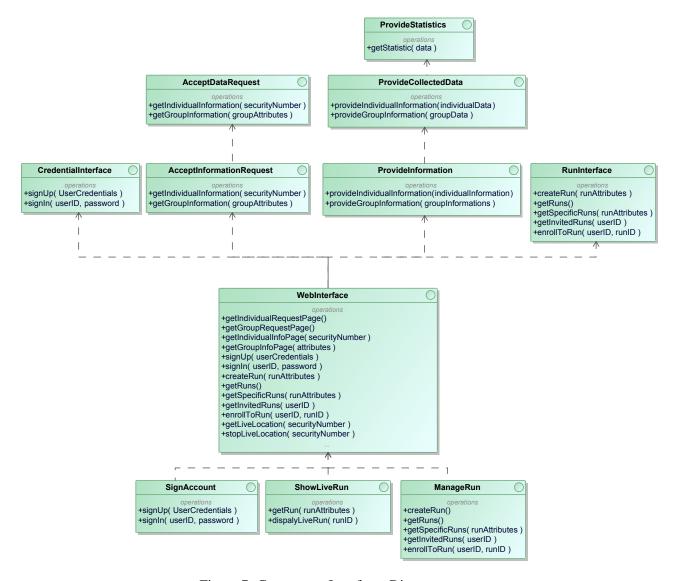


Figure 7: Component Interfaces Diagram

1.1 WebServer:

1.1.1 **WebInterface:** Human interface for third parties that want to log in or retrieve information from Data4Help service. Software interface for Track4Run and for AutomatedSOS in order to provide requested information.

1.2 RequestManager:

- 1.2.1 **AcceptInformationRequest:** Software interface that allows WebServer to submit requests to be evaluated.
- 1.2.1 **ProvideInformation:** Software interface that provides to web server information answers that match previous requests.

1.3 DataCollector:

1.3.1 **AcceptdataRequest:** Software interface offered by DataCollector that accept requests from RequestManager formatted in the proper way.

1.3.1 **ProvideInformation:** Software interface offered by DataCollector that provide to Request Manager information answer formatted in the proper way.

1.4 StatisticGenerator:

1.4.1 **ProvideStatistics:** Software interface that provides statistic values to data collector. (The Software interface to receive data from Data collector to be managed is trivial and not explicitly specified).

1.5 UserManager:

- 1.5.1 **AcquireData:** Software interface that allows partner application to send data acquired to Data4Help.
- 1.5.1 **Enroll user:** Software interface that allows partner application's users to become registered users into TrackMe's system.

1.6 Track4RunManager:

1.6.1 **EditRaceSettings:** Software interface that allows Track4Run application to create or modify races information.

2.1 UserDBMS:

- 2.1.1 **StoreUserData:** Software interface that allows to store users' data into the database.
- 2.1.2 **ProvideStoredData:** Software interface that allows to retrieve users' data already collected in the database.

2.2 Track4RunDBMS:

- 2.2.1 **StoreRaceData:** Software interface that allows to to store races' data with queries.
- 2.2.2 **ProvideStoredData:** Software interface that allows to retrieve users' data already collected in the database.

3.3 UserLogger:

3.3.1 **Enrollment:** Software interface that permits to inform Users' Manager that a new user is successfully enrolled and with which credentials.

4.1 HealthAnalyser:

4.1.1 **CallAmbulance:** Software interface that allows AutomatedSOS to call, through the internet or in the worst case through telephone call, First Aid whenever is necessary in order to provide help to user. Moreover it provides to FirstAid a special report on which parameters are critical.

5.1 RaceDisplayer:

- 5.1.1 **SelectRace:** Human interface that allows user to specify the race to be displayed.
- 5.1.1 **ShowLiveRace:** Human interface that allows to provide to the end user a map in which all the athletes involved in the selected race are displayed.

5.2 RaceDisplayer:

5.2.1 **ManageRace:** Human interface that allows user to create and manage a run providing all the useful information.

2.6 Selected Architectural Styles and Patterns

This system is designed to be a Client-Server application with three tier that well separate the different components as shown in Overview description in order to implement MVC software design pattern.

• Architectural Design:

- Client-Server architectural pattern is chosen because it is the most used and easily implemented communication pattern in fact, in our application, is the best one to supply on third parties information requests and to acquire data from users via internet. Regarding the acquisition of users' data, is the smartphone that decides, when data are successfully collected from the device, to call Data4Help server in order to provide and store data, furthermore even third parties call Data4Help server first and then the exchange of the information can be proceed; these two operations are the main core of the service then is logic that client-server architecture will be the right choice.
- Three tier architecture should be implement to assure reuse and maintainability of the system, in fact this division can permit to change some parts of the system without reconfigure the entire solution.
 - * Presentation Tier, as described above, is in charge of display on final users screen a human interface that allows the interaction with our system. This tier is present only on users' device: regarding third parties the software that is in charge to display human interface will be his own browser so the exchanged information will be an HTML page on Http connection; instead, regarding users, the software will be the application that runs on the device that works on HTML pages as well; so for both the type of users the interface to the Application Tier is the WebServer that allocate the right page to the right target. In order to supply on this aspect the partner application (AutomatedSOS and Track4Run as well) will be developed in HTML (with the support of JS and CSS) that are web languages, this aspect make also the application multi platform so they can be launched on either iOS or Android devices. Http communication protocol will be used for both connection.
 - * Application Tier, as described above, is in charge to acquire all the data incoming from users, to store them on Data Tier and to handle the request on viewing data. This Tier is present on the largest part on Application server but even AutomatedSOS has inside his software an application service. All the component inside this tier will be developed in Java, in particular the Web Server runs tomcat Java servlet that generates the html pages for Presentation Tier, acquire data that users submit and communicate through RMI with the business application that runs on the Application Server. The business application is the main core of Data4Help service, and is composed by all the other components inside ApplicationServer (as Request Manager, Data Collector, Statistic Generator...); is required that it can interface with Web server, in order to acquire the external requests, and then using the components described above supply the information required; furthermore is in charge to manage all the information of users, as login or registration, or manages Track4Run races. Another very important aspect is that this application has to retrieve data from users implementing a daemon on a specific port and listening for a TCP/IP connection incoming from partner application in order to acquire users' data. As mentioned before even AutomatedSOS implements a small part of application tier inside his software that is in charge to continuously monitor health status acquired, compare it with old data and call an ambulance via web if there is a necessity filling out a form which are indicated all the critical parameters detected.

* Data Tier, as described above, is in charge to store and provide informations. This tier is present only on Database Server that is an Oracle machine using SQL schemas. The database is divided in two parts, one regarding Data4Help service that stores and manages users' data: historical users' location and health parameters; the other one regarding Track4Run that stores races' information. This Tier offers an SQL interface that can be exploit by Business application using JDBC libraries that supports SQL functions.

• Software Pattern:

- The MVC (Model-View-Controller) is the obvious software pattern that can be applied on three tier architecture because can split the entire software solution in the three main region: the Model implements all that is described in data tier, the controller all that is described on Presentation tier and View all that is described in Presentation tier. All these 3 groups communicates each others through the so called Adapter Pattern.
- The Adapter design pattern is developed to create an interface that permits to the MVC groups to easily communicate each others using different languages or different operating system that is mandatory in our system. This pattern is the representation of what is described on Component Interface section.
- Strategy design pattern can be so much useful in the implementation of RequestManager component because it can dynamically change how to handle request queue in order to supply efficiently on heavy request load.
- Proxy design pattern is an obvious consequence of Web Server, because this component stay in the middle between the two tier and creates a sort mask that obscure what is behind it and simplify a lot the Presentation Tier software that has only to display what Web server indicates

2.7 Other Design Decisions

3 User Interface Design

in this Section the user interface design, already presented in *Section 3.1.1 User Interfaces* of *Require-ments and Analysis Specification Document* with several mockups, is explained in more detail. A special attention is focused on the interaction between the user and the systems, and how the mockups are correlated each other.

• Data4Help

AutomatedSOS

TrackMe offers to AutomatedSOS users an App for smartwatches, with which the users can see their location and health status information.

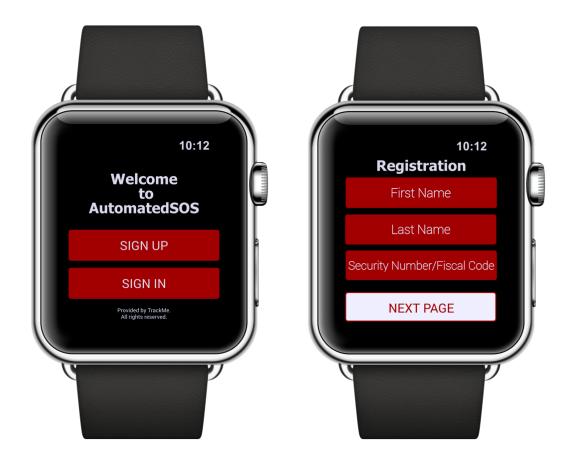


Figure 8: Welcome page.

Figure 9: Registration form.

In the first access to AutomatedSOS App the user is asked to sign up or to sign in (Figure 2). Based on the fact that the user already has a TrackMe account or not will choose the right option. In future accesses to the App the user do not need to select each time one of these two possible options because the App automatically remembers the account which is logged in. In case of sign in (Figure 3), the user has to fill all the mandatory fields in order to complete the registration form. Scrolling down the screen other fields will appear. Once every field is correctly filled, it would be possible to select the **NEXT PAGE** button.



Figure 10: Privacy Policy Conditions.

Figure 11: Usage Conditions.

During the first access to the App, the next step after sign up/sign in is to agree to the Privacy Policy Conditions (Figure 4). In order to use this App the user has to agree to the treatment of Location and Health Status data by Data4Help. In addition, these data could be used by third parties for the group monitoring request. Without agreeing the Privacy Policy Conditions the user cannot go to the next page, therefore he/she will not be able to use this App. The last step before starting use the App is taking note of the importance of wearing the Smartwatch as much as possible and to let the App runs in background (Figure 5).



Figure 12: Main menu.

Figure 13: Warning message.

The main menu of the App, which is immediately accessible by selecting the AutomatedSOS App on the Smartwatch home, is composed by three parts (Figure 6). Selecting **Monitor Health** the user can see live health informations, like the current Heart Rate, Blood Pressure and so on. Choosing the **Acquired Info** button the user can see all the historical data stored since the first access to the App. Finally, **Preferences** option allow to the user to set own threshold parameters according to the particular illnesses he/she is affected, own age and so on. As soon as an ambulance request is done due to the user's critical health status a warning message (Figure 7) appears on the screen of the Smartwatch notified by an alert sound.

• Track4Run

Track4Run users can use an App for smartphone and another one for smartwatches. The first one could be used by everyone, while the second one is made only for the athletes.

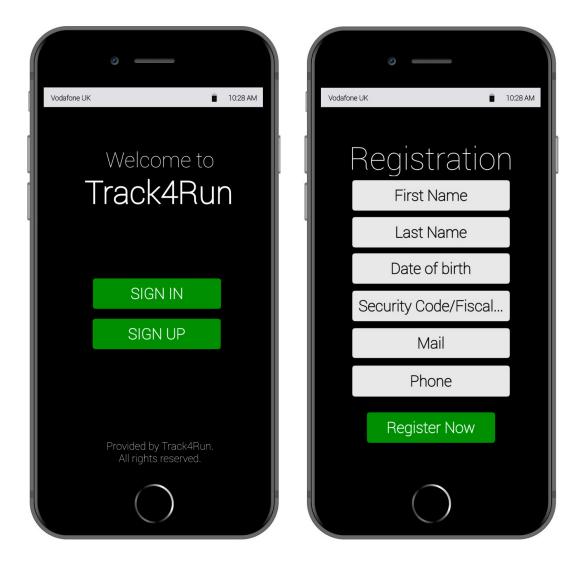


Figure 14: Welcome page.

Figure 15: Registration form.

In the first access to Track4Run App the user is asked to sign up or to sign in (Figure 2). Based on the fact that the user already has a TrackMe account or not will choose the right option. In future accesses to the App the user do not need to select each time one of these two possible options because the App automatically remembers the account which is logged in. In case of sign in (Figure 3), the user has to fill all the mandatory fields in order to complete the registration form. Once every field is correctly filled, it would be possible to complete the registration selecting the **Register Now** button.

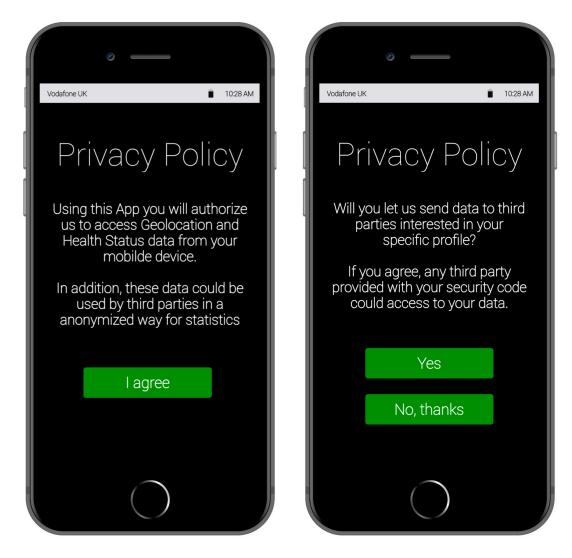


Figure 16: Privacy Policy Conditions pt.1

Figure 17: Privacy Policy Conditions pt.2

During the first access to the App, the next step after sign up/sign in is to agree to the Privacy Policy Conditions (Figure 4). In order to use this App the user has to agree to the treatment of Location and Health Status data by Data4Help. In addition, these data could be used by third parties for the group monitoring request. Without agreeing the Privacy Policy Conditions the user can not go to the next page, therefore he/she will not be able to use this App. All the three first steps presented so far are substantially the same of AutomatedSOS. The next step regards the second part of the Privacy Policy Conditions (which was not presented for the previous system) about individual monitoring request (Figure 9). In this case it is not strictly necessary to accept it, the user simply can select the **No, thanks** option.



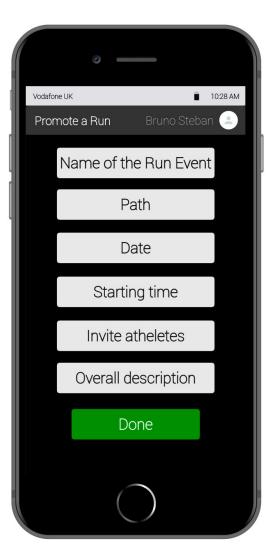
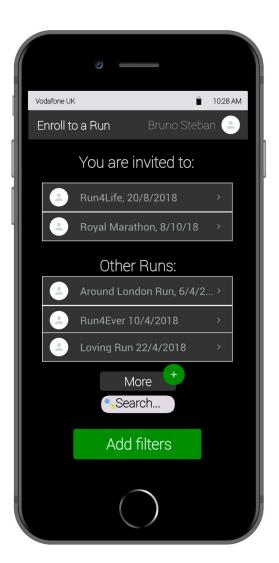


Figure 18: Main menu.

Figure 19: Pomote a run view.

In Track4Run Home three options are possible. Selecting the first one, **Promote a Run**, a user can create a run event and promote it inviting athletes. The second option, which is **Enroll to a Run** allows the user enrol to a run. Finally, choosing **Spectate a Run** a spectator can see on a map the position of all runners during the run. Now, we analyze these three possibilities in detail. Choosing the first one the App leads the user to a new page in order to manage the event (Figure X). Here, it is possible to set all the necessary features of the run, like to define the path on a map, set the date, the starting time and so on. It is also possible to invite athletes to the run in order to promote the event.



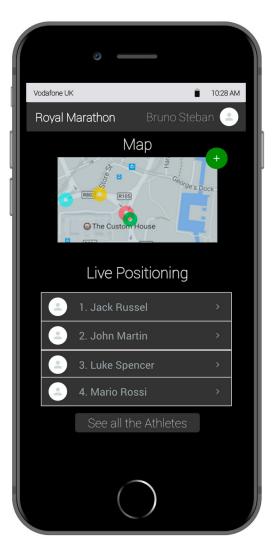


Figure 20: Enroll to a run.

Figure 21: Spectate a run view

In the section Enroll to a Run (Figure X) a user can see a list of all the runs in which he/she has been invited. The user can select each of these runs to see furthermore details about it and at the end to enroll to it. A list of all the runs that will be soon held is showed immediately below. Since the large number of all the future runs, only a little portion of them is showed, selecting the **More** + button the user can see another set of run events. In addition, through **Add filters** it is possible to limit the list of the all runs to a specific date, location and similar options. To easily access to a specific run, the **Search** button allows the user to immediately find the run he/she was looking for. In the last section, Spectate a Run (Figure X), it is possible to spectate to a specific run in a interactive way. A map shows all the runners enrolled in it, each one represented by a different coloured circle. Selecting the + button is possible to zoom in the map that will appear on full-screen mode. Below the map the live positioning show the first four athletes, anyway selecting **See all the Athletes** option it is possible to see the live positions of all the participants.

4 Requirements Traceability

This section shows how the requirements can be supplied by the designed components

- R.1 Retrieve user credentials inserted into partner application as group attributes.
 - UserLogger: Receive from SignAccount user credentials and communicate them to Web Application using WebInterface.
 - WebServer: Receive from WebInterface the credentials and provide them to credential manager through CredentialInterface.
 - CredentialManager: Check the credentials inserted and if they are valid store them into DB using DBInterface.
 - DBMS: Store data incoming from DBInterface.
- R.2 Allow users already registered in Data4Help world to sign in with their account without providing user credentials again.
 - UserLogger: Whenever a user start the application automatically this component inform the WebServer.
 - WebServer: Receive from WebInterface users' log request and send those to CredentialManager.
 - CredentialManager: Check the users' availability and communicate it in reverse order.
- R.3 Allow individuals to agree the privacy policy (first part) so that they can be tracked in group mode through installed application.

5 Implementation, Integration and Test Plan

6 Effort Spent

In this section contains information about how much hours each group member spent in working at this document.

6.0.1 Luca Alessandrelli

23/11/18 24/11/18	Overview Deployment View	1
		2
06/11/10		3
26/11/18	Deployment View	1
27/11/18	Runtime View	6
29/11/18	Component Interface	3
30/11/18	Runtime View	2.5
1/12/18	Component Diagram	2
1/12/18	Runtime View	1.5
	Overview	
	1	
	ployment View	4
R	10	
	ponent Interface	3
Com	2	
	Total	16.5

6.0.2 Andrea Caraffa

Date	Task	Hours
18/10/18	Goals	2
19/10/18	Domain Assumptions	3
20/10/18	Text Assumptions	3
21/10/18	Introduction	2
27/10/18	Goals	2
30/10/18	Product Functions	3
1/11/17	Mockups	3
3/11/18	Mockups	3
4/11/18	Goals	2
4/11/18	Mockups	2 2 2
5/11/18	External requirements	2
5/11/18	Alloy	2
6/11/18	External requirements	3
9/11/18	Revisioning	2
9/11/18	Alloy	3
10/11/18	Revisioning	3
11/11/18	Revisioning	3
11/11/18	Alloy	3
Te	3	
	6	
Don	3	
	2	
Pr	3	
Exte	5	
	8	
	8	
Doc	8	
	46	

6.0.3 Andrea Bionda

/ Task	Hours
Text Assumptions	3
Goals and Introduction	6
Domain Assumptions	3
Functional requirements	13
Class Diagram	5
Sequence Diagram	5
Performance requirements and Constraint	s 3
Alloy	7
Total	45

7 Reference Documents

- Specification Document "Mandatory Project Assignment AY 2018-2019".
- Slides "Structure of RASD".
- Slides "Use of Alloy in RE".
- Use Case Diagrams created with https://www.lucidchart.com
- Mockups created with https://www.fluidui.com