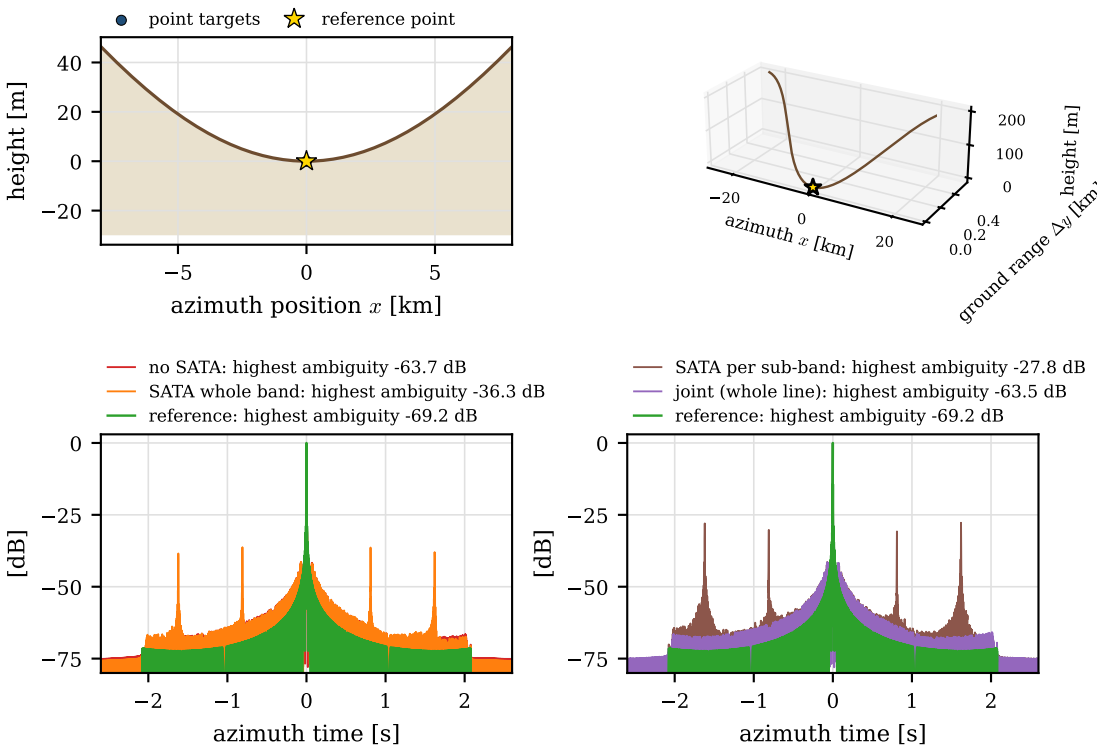

point targets
reference point
height [m]
azimuth position x [km]
azimuth x [km]
ground range Δy [km]
height [m]
no SATA: highest ambiguity -63.7 dB
SATA whole band: highest ambiguity -36.3 dB
reference: highest ambiguity -69.2 dB
[dB]
azimuth time [s]
SATA per sub-band: highest ambiguity -27.8 dB
joint (whole line): highest ambiguity -63.5 dB
reference: highest ambiguity -69.2 dB
[dB]
azimuth time [s]