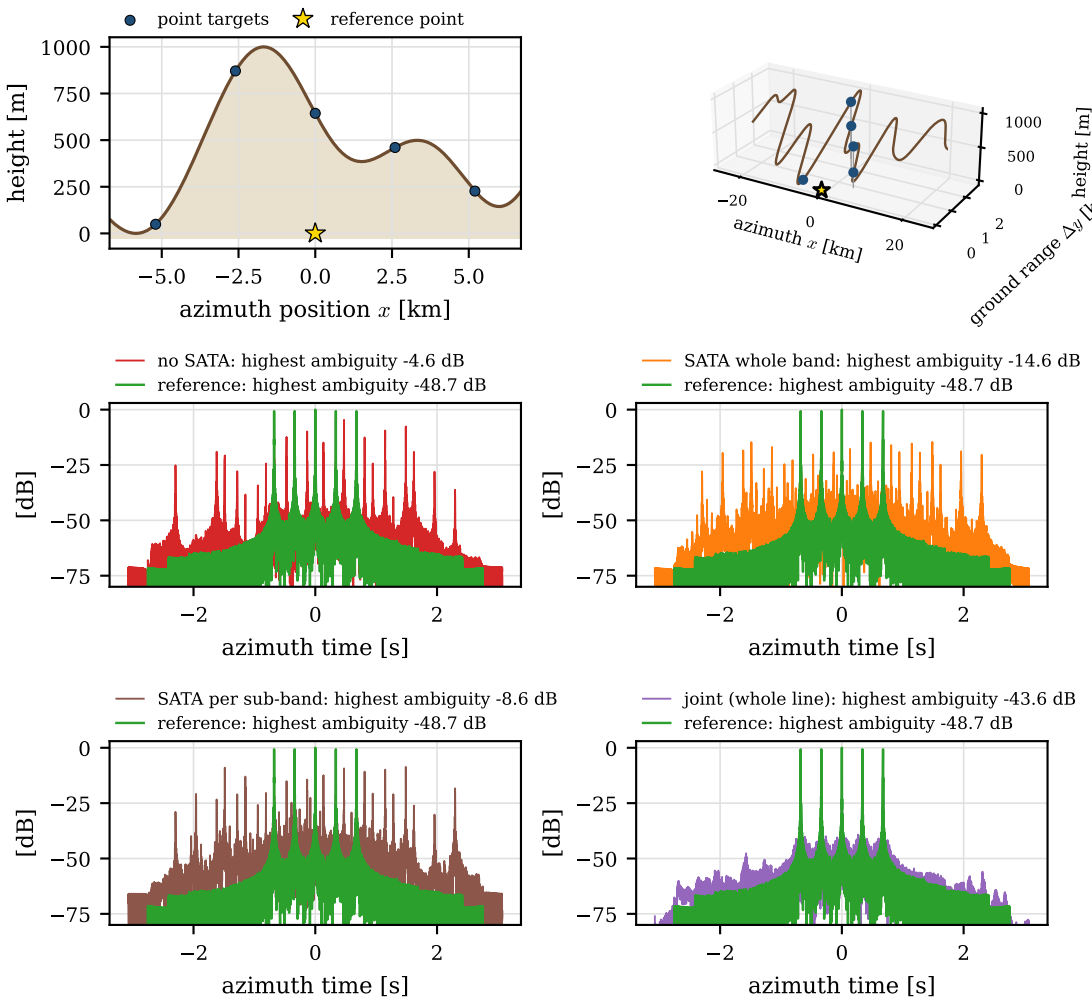

point targets
reference point
height [m]
azimuth position x [km]
azimuth x [km]
ground range Δy [km]
no SATA: highest ambiguity -4.6 dB
reference: highest ambiguity -48.7 dB
SATA whole band: highest ambiguity -14.6 dB
reference: highest ambiguity -48.7 dB
SATA per sub-band: highest ambiguity -8.6 dB
reference: highest ambiguity -48.7 dB
joint (whole line): highest ambiguity -43.6 dB
reference: highest ambiguity -48.7 dB
[dB]
azimuth time [s]