


SATA 1D, along-track ramps (all slopes, N and height scales), targets 200 m apart, $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m
x axis of the SATA panels: largest height step between neighbours (they share a sub-aperture cell)

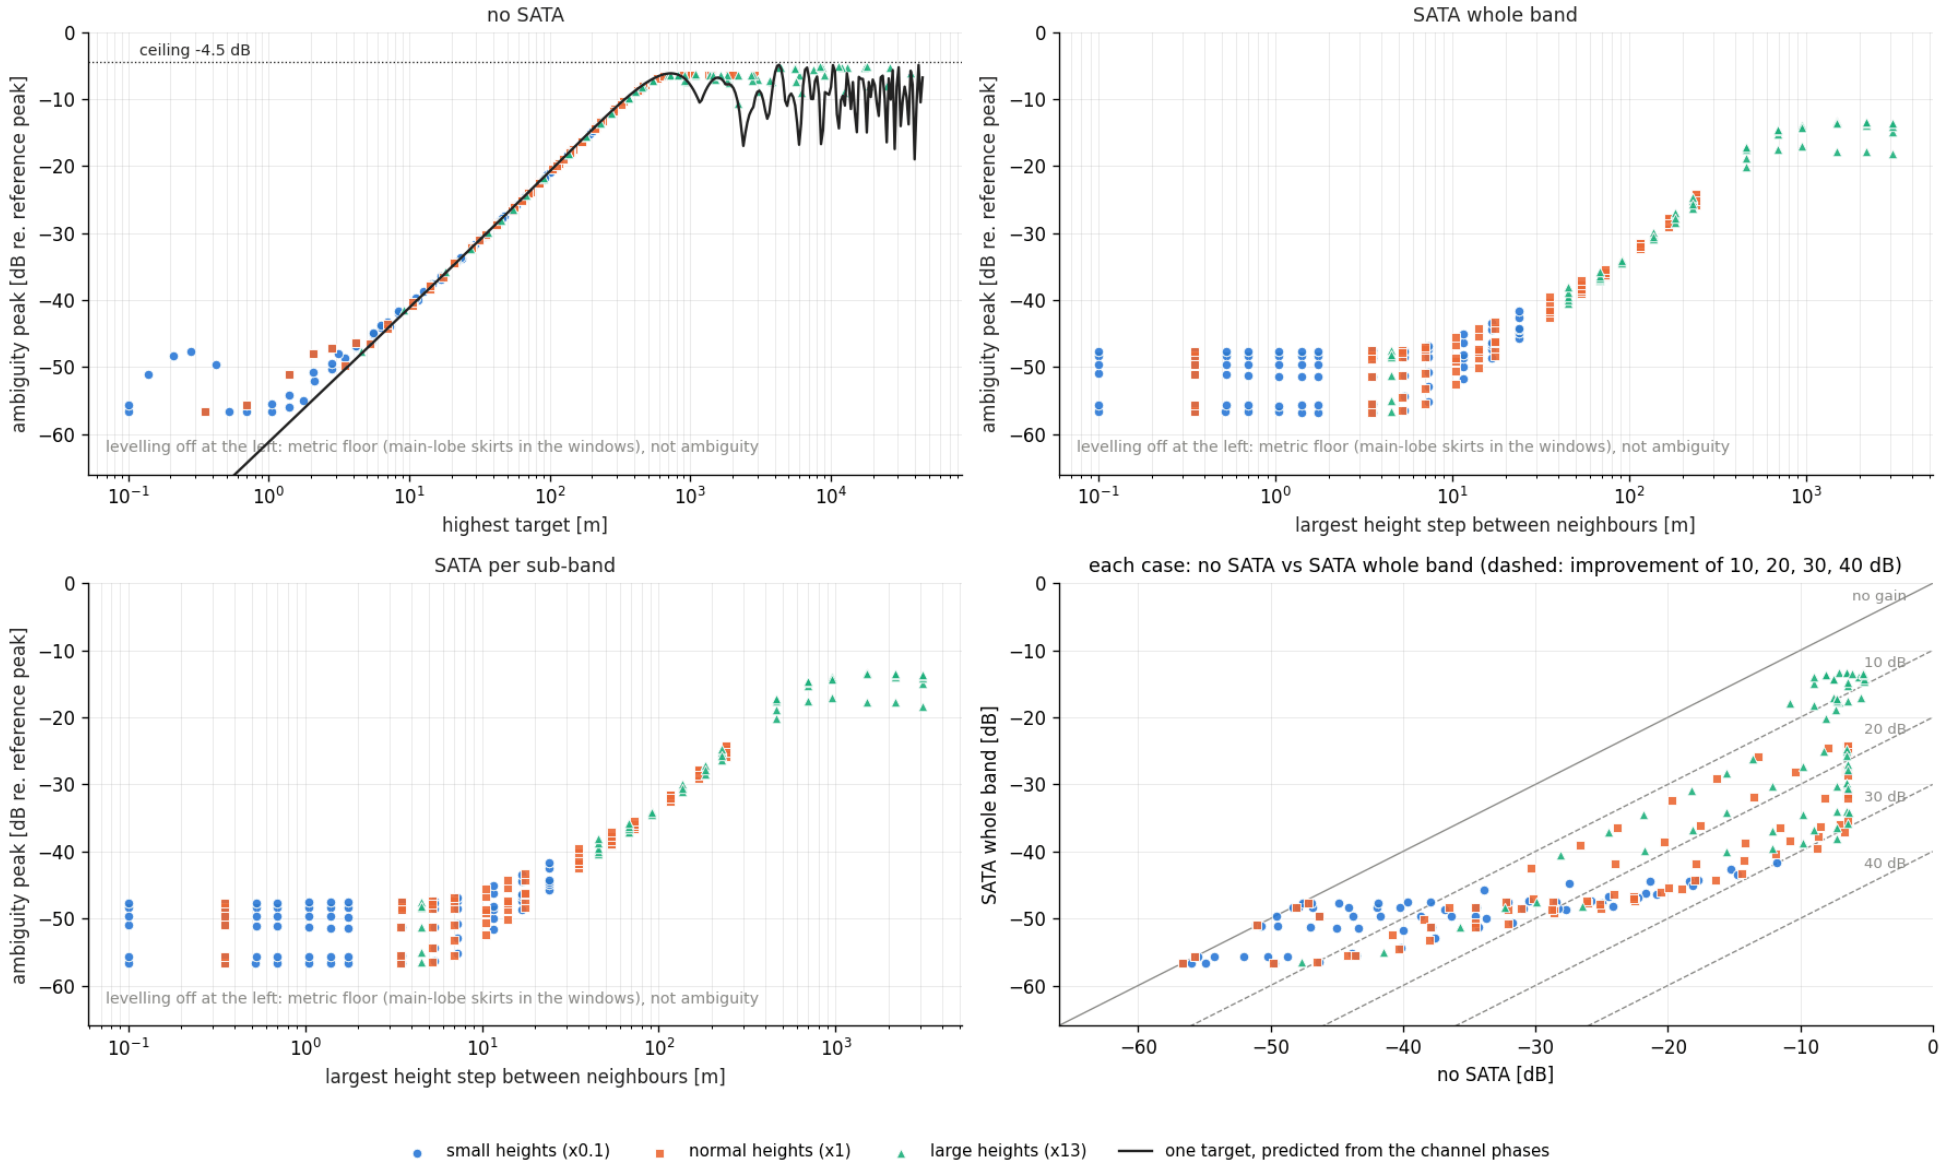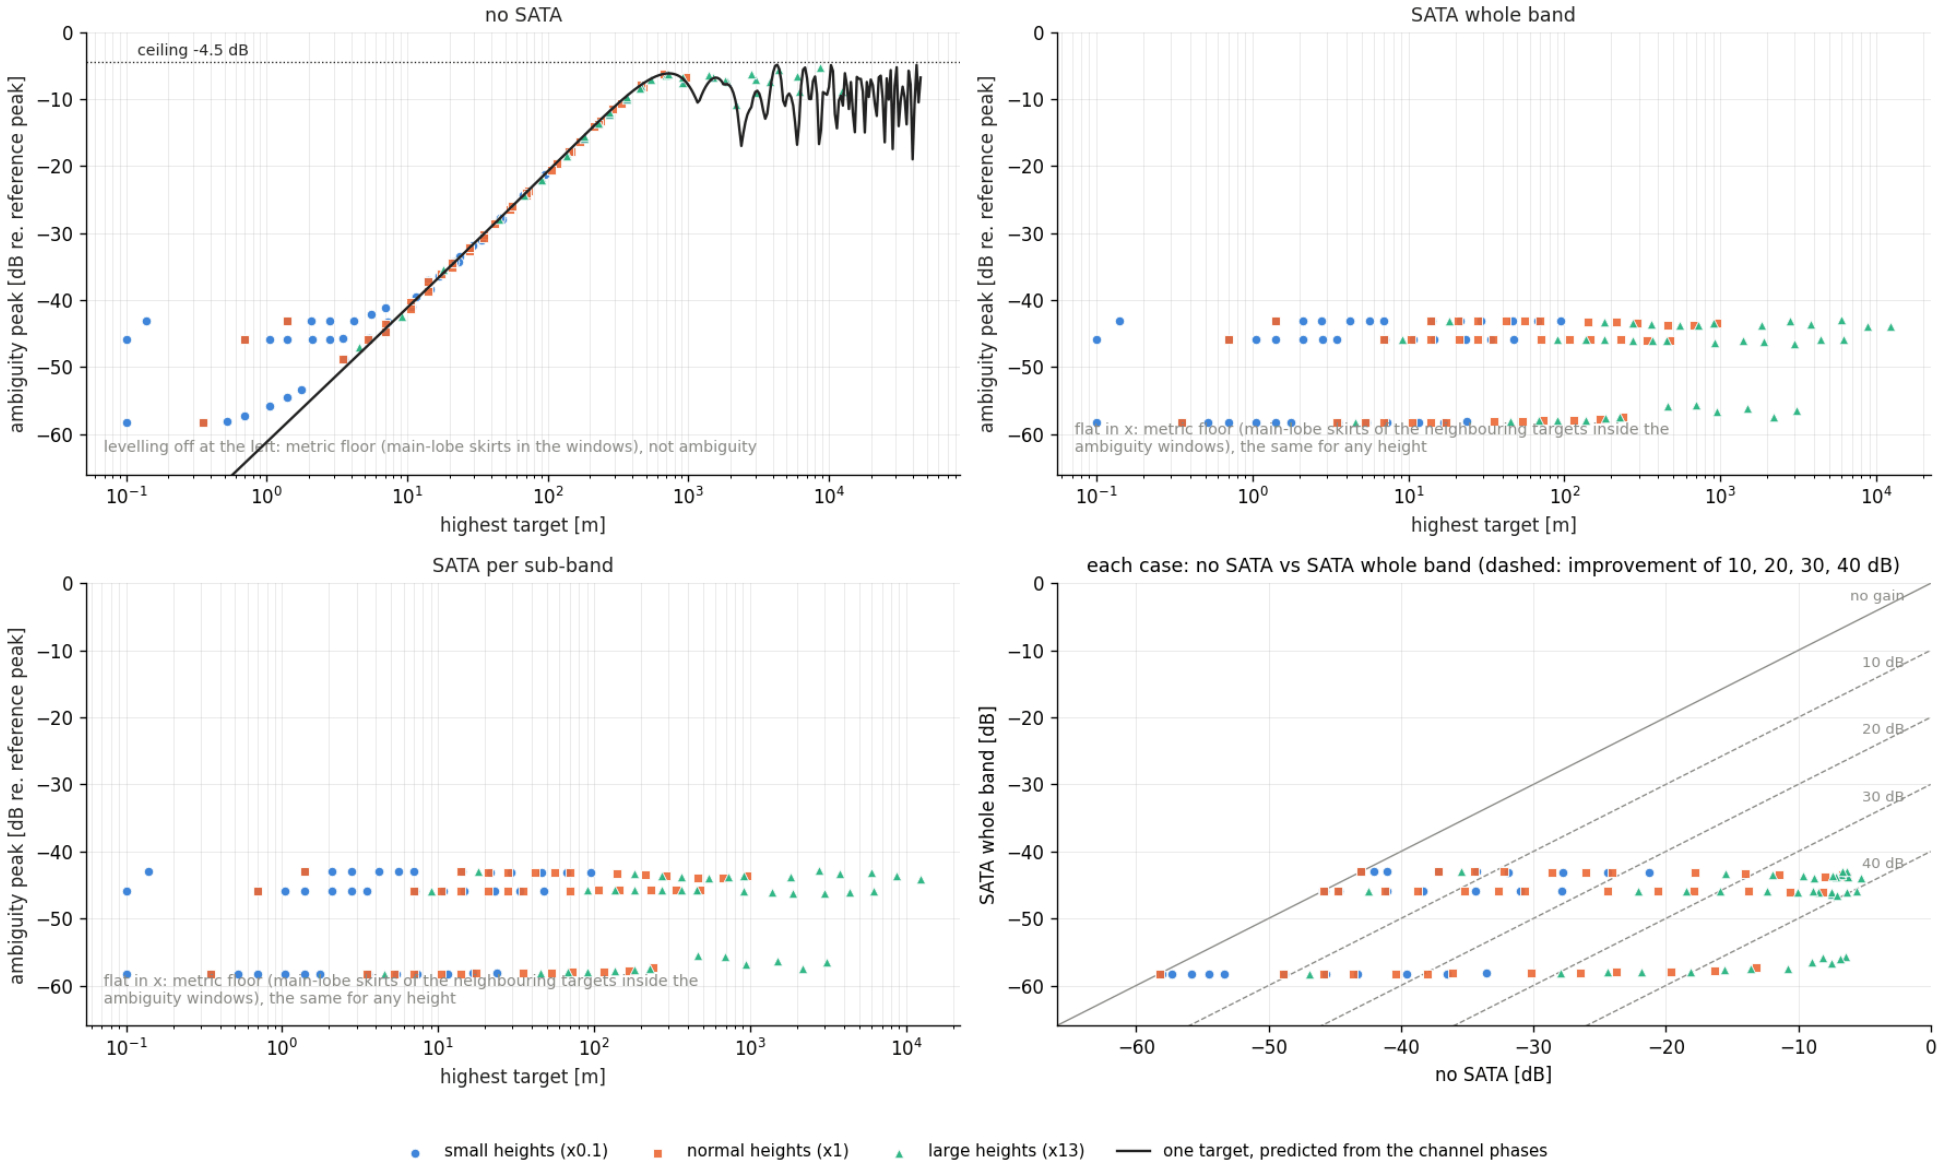


SATA 1D, along-track ramps (all slopes, N and height scales), targets 2.6 km apart, $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m
x axis: highest target (separated targets, each corrected on its own)

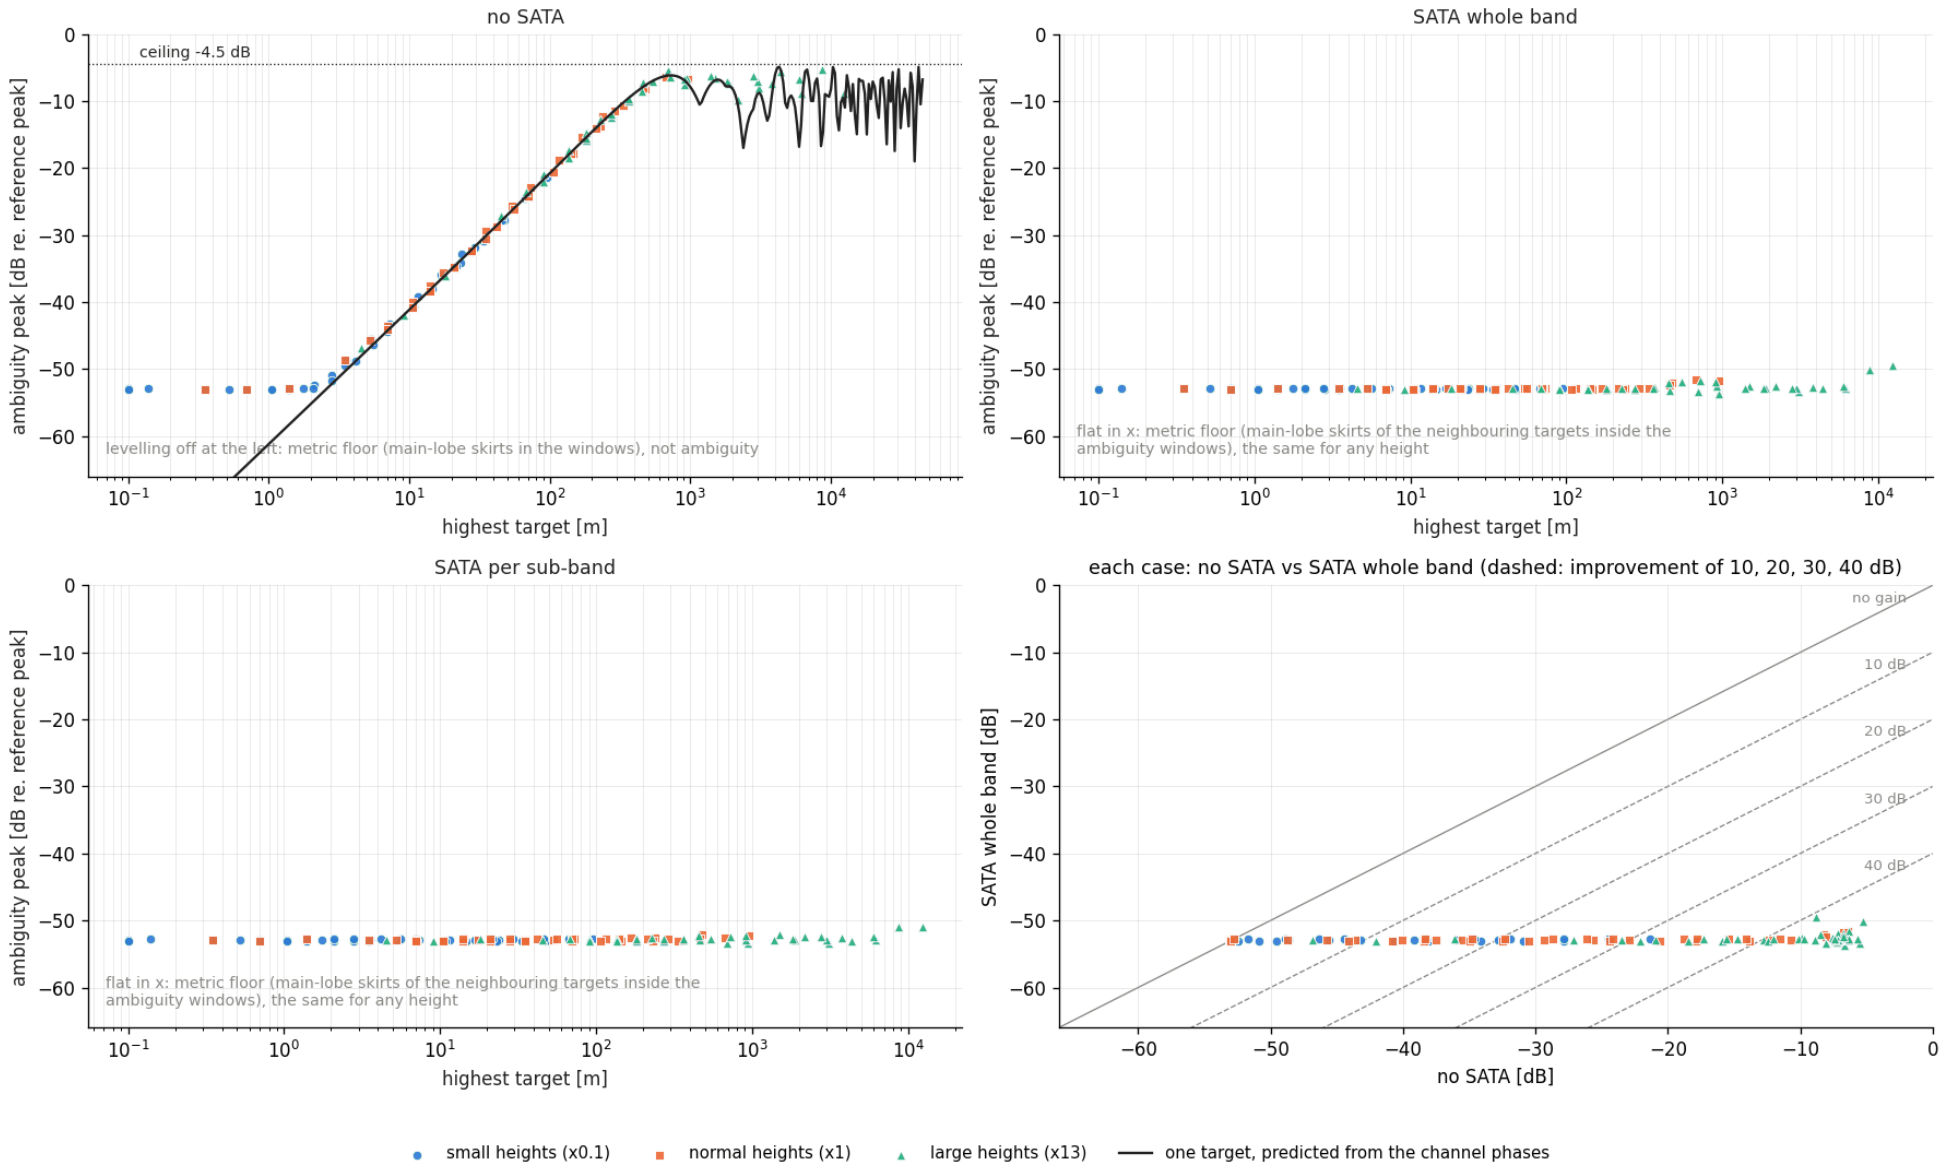



SATA 1D, along-track ramps (all slopes, N and height scales), targets 10 km apart, $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m
x axis: highest target (separated targets, each corrected on its own)
no SATA
ceiling -4.5 dB
levelling off at the left: metric floor (main-lobe skirts in the windows), not ambiguity
ambiguity peak [dB re. reference peak]
highest target [m]
SATA whole band
flat in x: metric floor (main-lobe skirts of the neighbouring targets inside the ambiguity windows), the same for any height
SATA per sub-band
each case: no SATA vs SATA whole band (dashed: improvement of 10, 20, 30, 40 dB)
no gain
10 dB
20 dB
30 dB
40 dB
SATA whole band [dB]
no SATA [dB]
small heights (x0.1)
normal heights (x1)
large heights (x13)
one target, predicted from the channel phases

SATA 1D, along-track ramps: no SATA, measured ambiguity peak vs the prediction $\max_j |c_j(d)|\beta_{|d|}$ from the channel phases of each target

(below about -45 dB the measurement reads the metric floor, not the ambiguity)

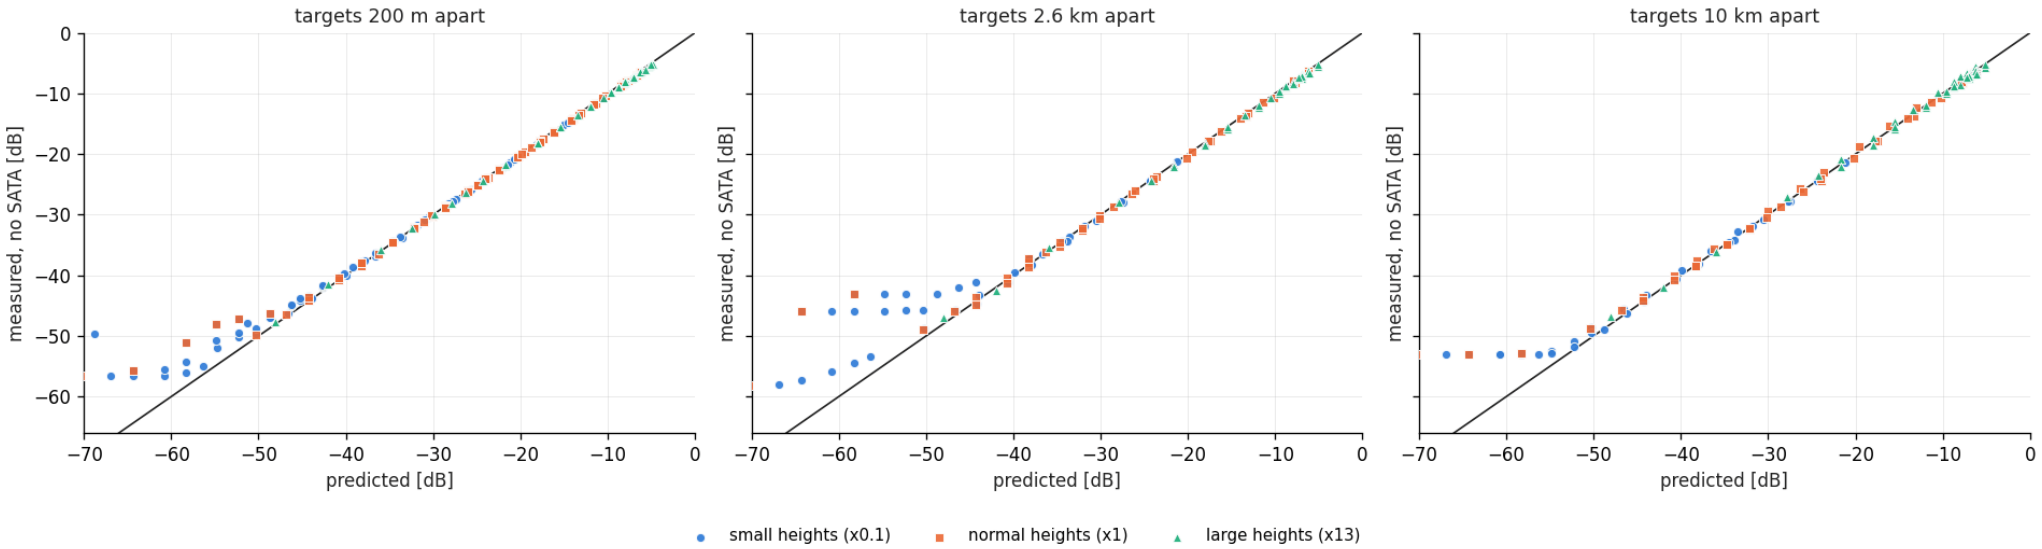


SATA 1D, along-track ramps: SATA per sub-band vs SATA whole band, ambiguity peak of every case

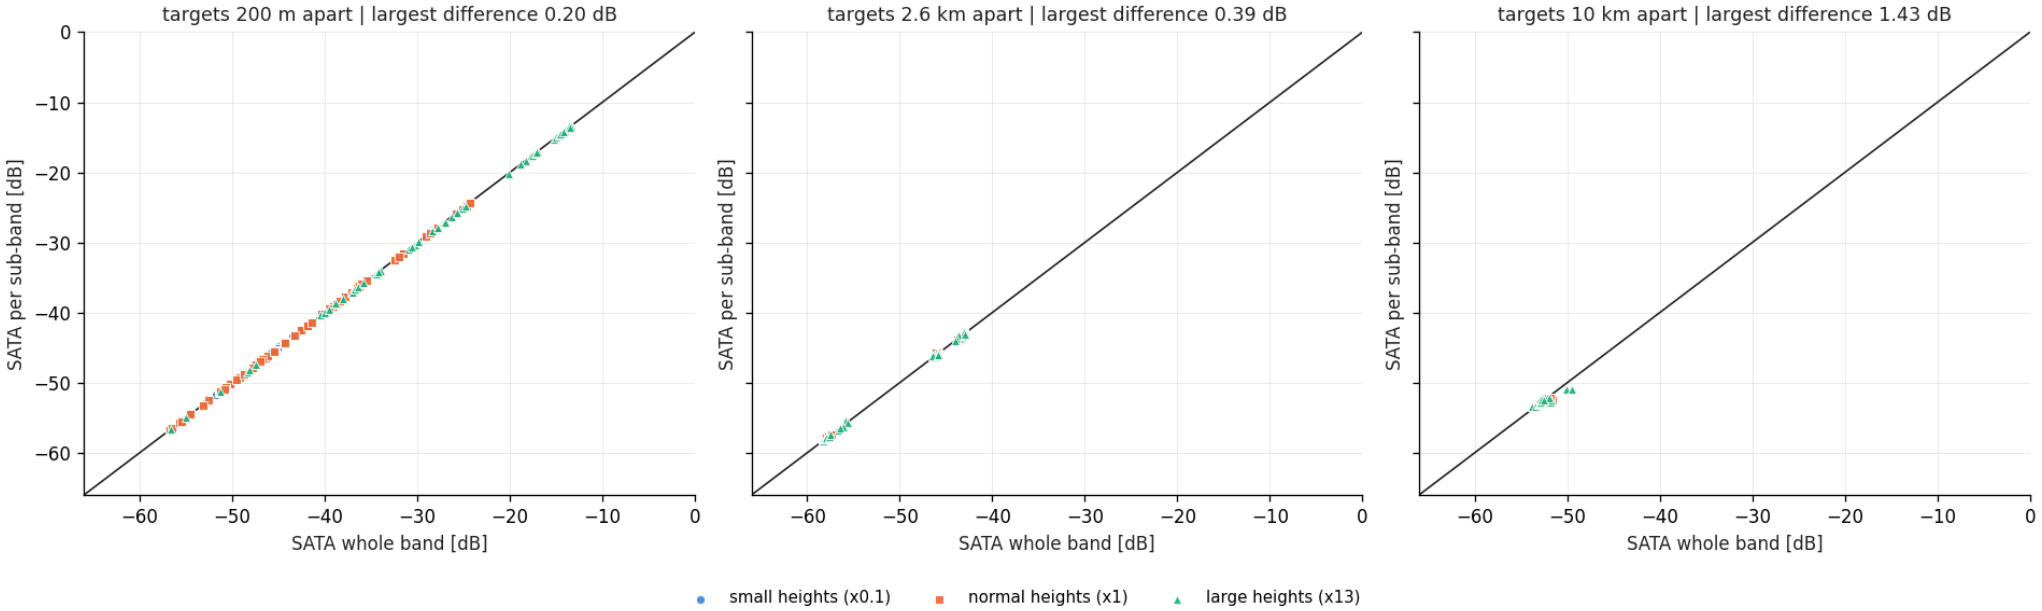


SATA 1D, along-track ramps, targets 200 m apart (small distance), small heights ($h_j = j \cdot 20\,\mathrm{m} \cdot \tan\alpha$)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s ($m$ = 1, 2) | $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m


SATA whole band: improvement = no SATA − SATA [dB] | median 8.9, min -0.3, max 29.9

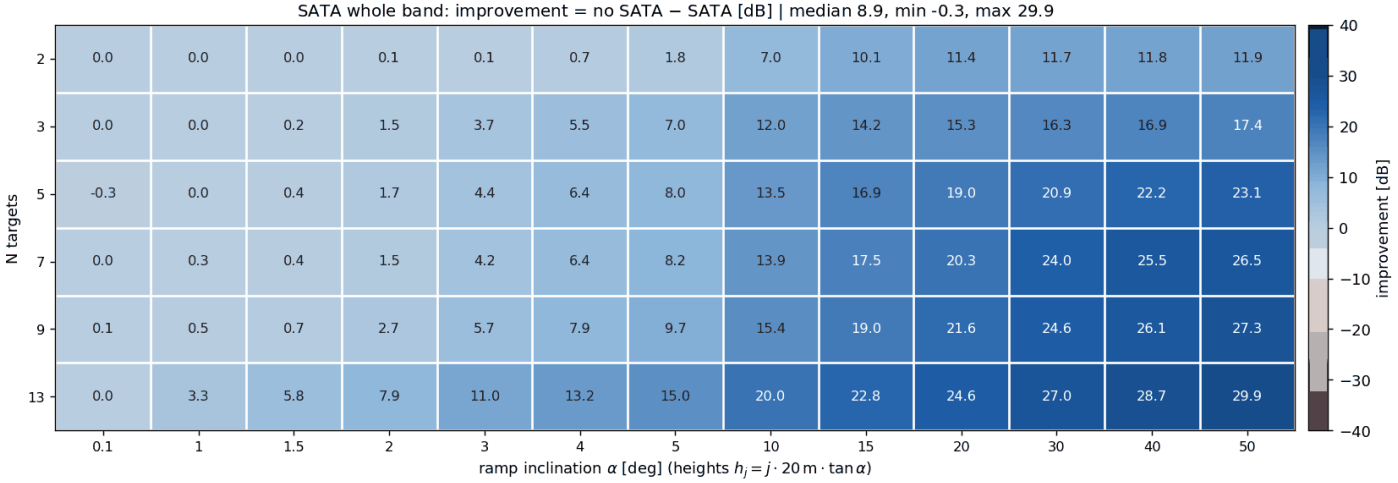




SATA per sub-band: improvement = no SATA − SATA [dB] | median 8.9, min -0.3, max 29.9

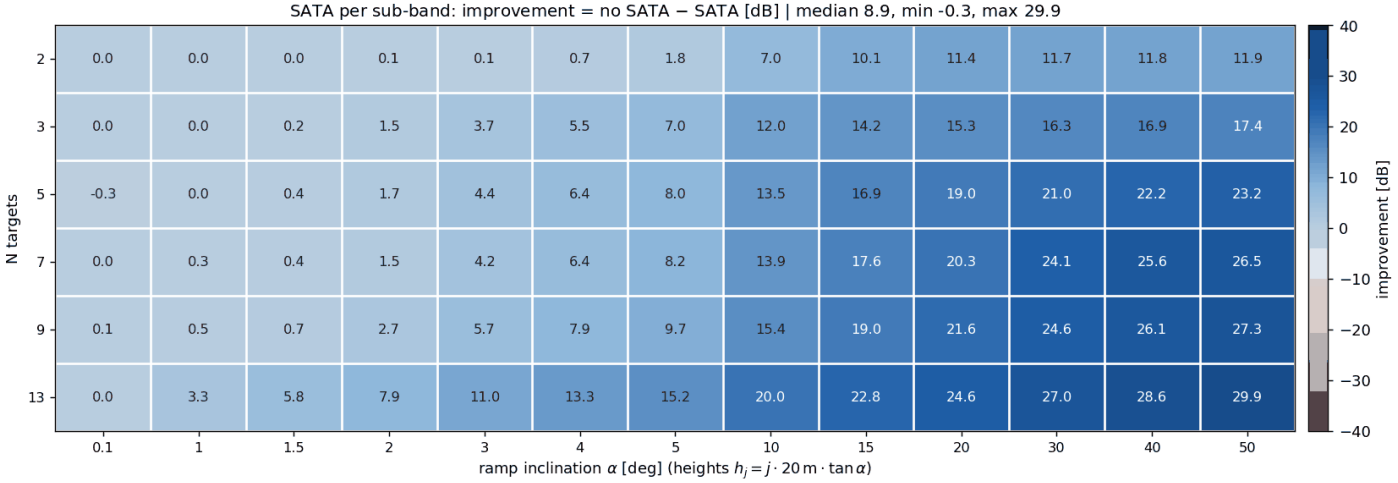


SATA 1D, along-track ramps, targets 200 m apart (small distance), small heights ($h_j = j \cdot 20\,\mathrm{m} \cdot \tan\alpha$)
ambiguity peak at $x_j/v \pm m\,0.81$ s ($m$ = 1, 2) | $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m

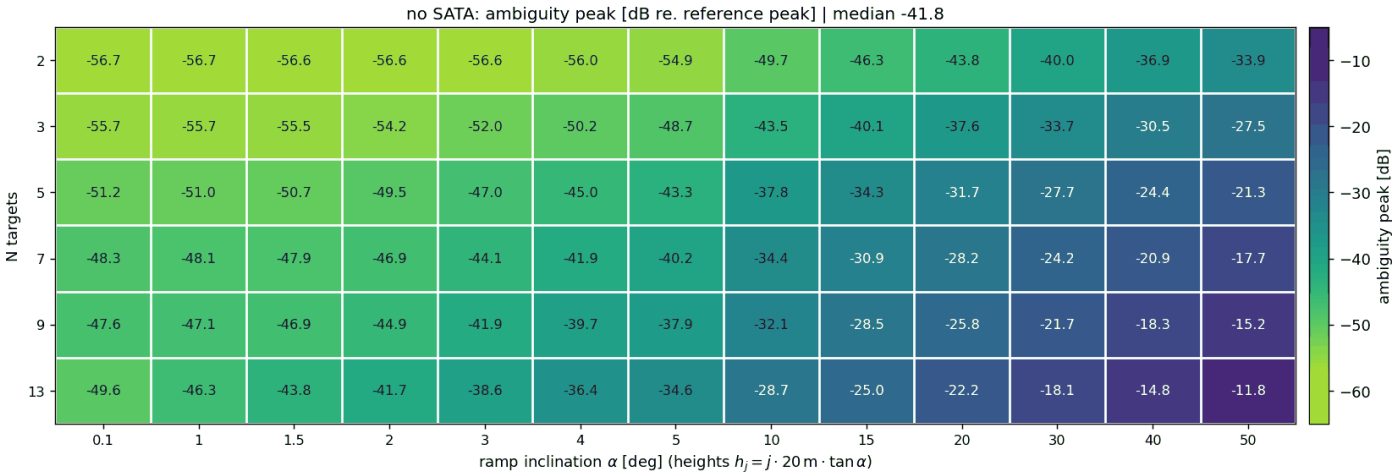


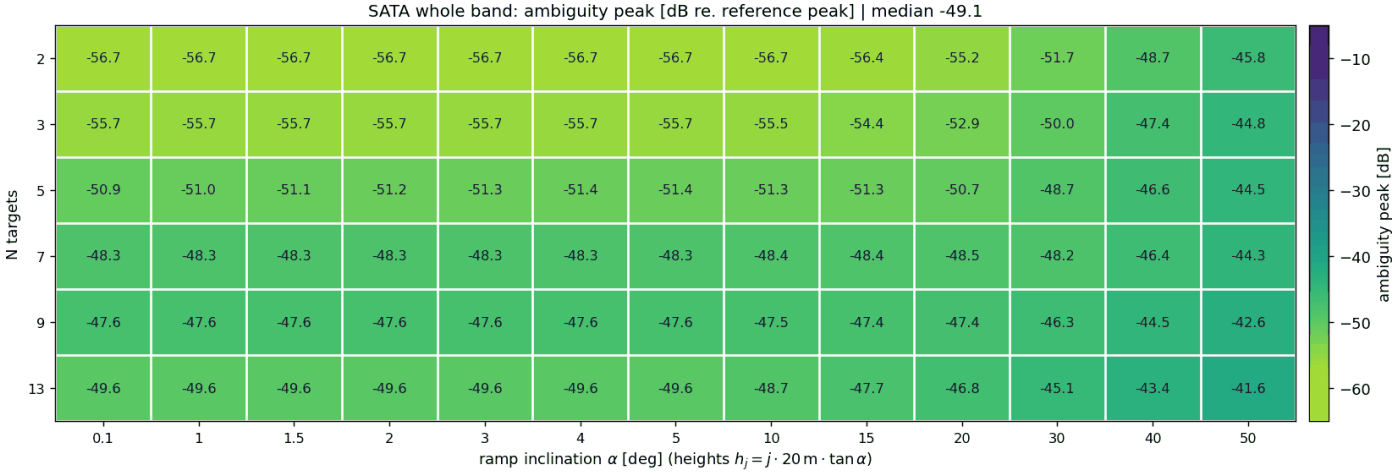


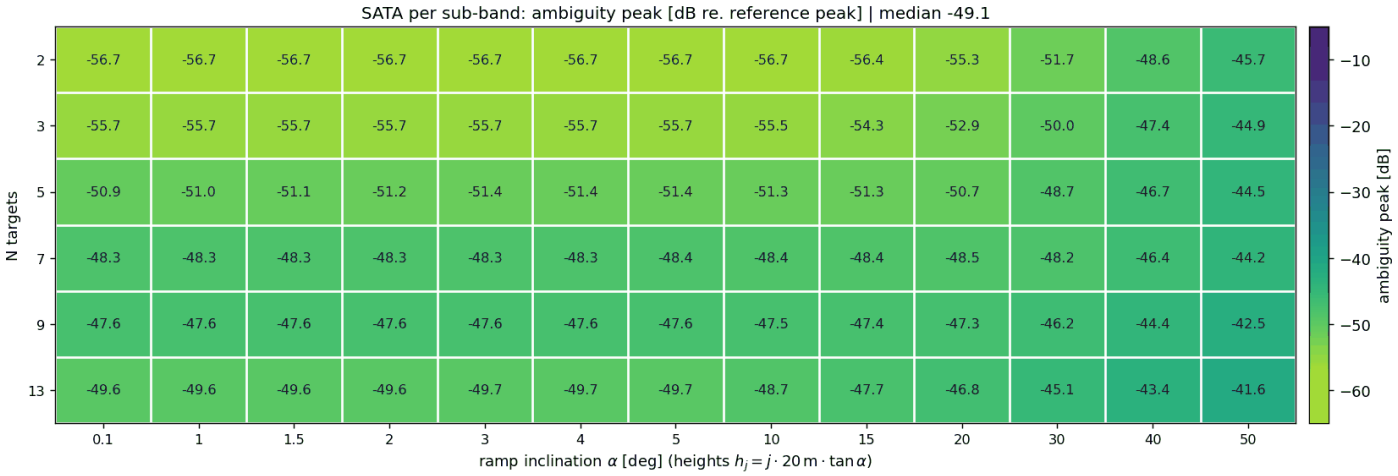
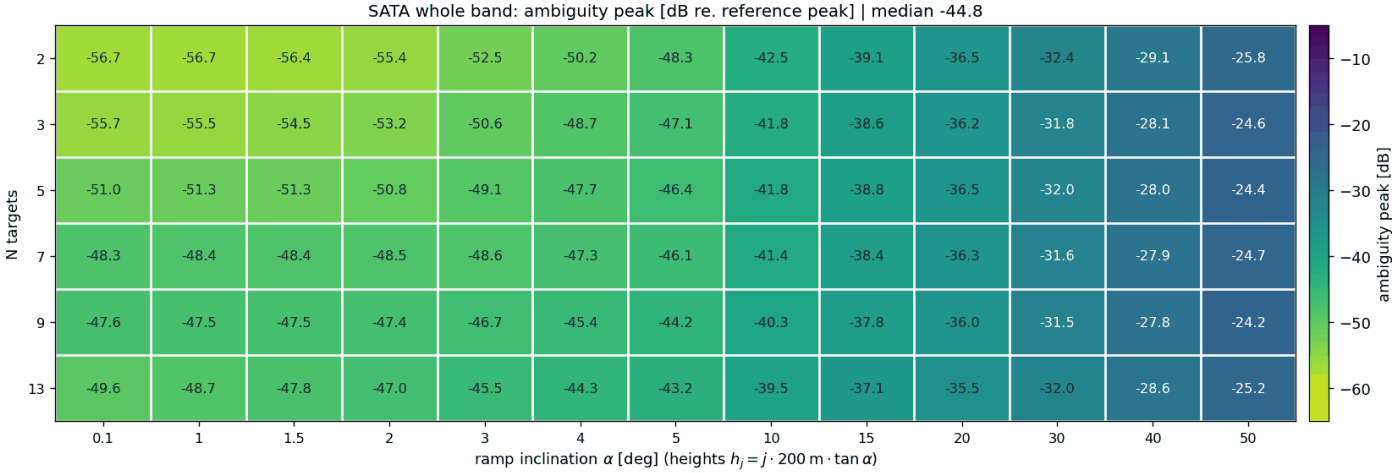
SATA 1D, along-track ramps, targets 200 m apart (small distance), normal heights ($h_j = j \cdot 200\,\mathrm{m} \cdot \tan\alpha$)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s ($m$ = 1, 2) | $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m

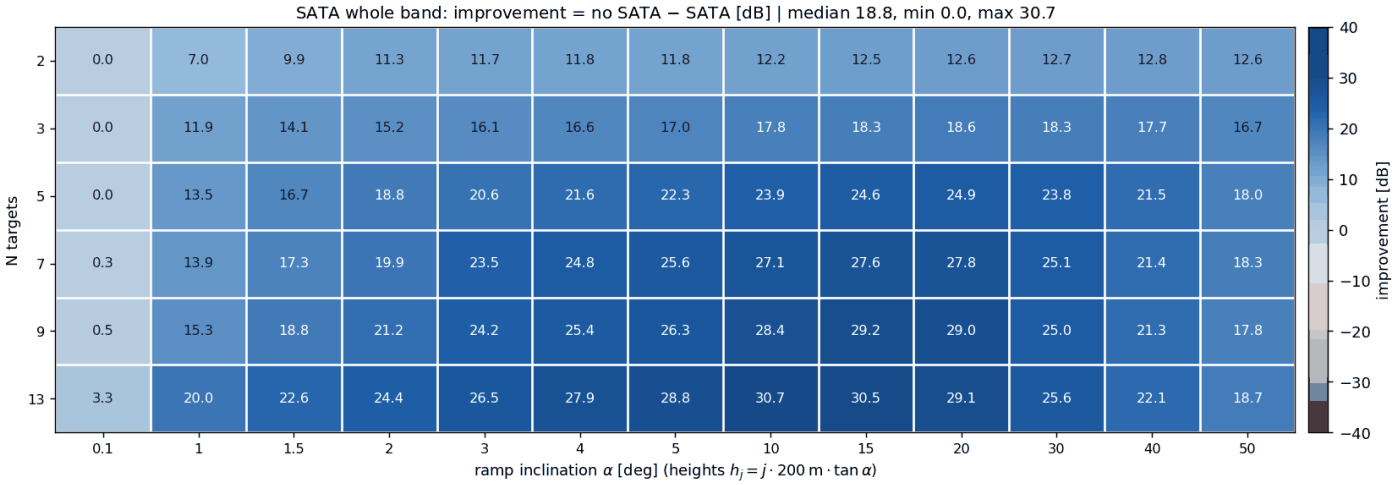



SATA 1D, along-track ramps, targets 200 m apart (small distance), normal heights ($h_j = j \cdot 200\,\mathrm{m} \cdot \tan\alpha$)
ambiguity peak at $x_j/v \pm m\,0.81$ s ($m$ = 1, 2) | $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m

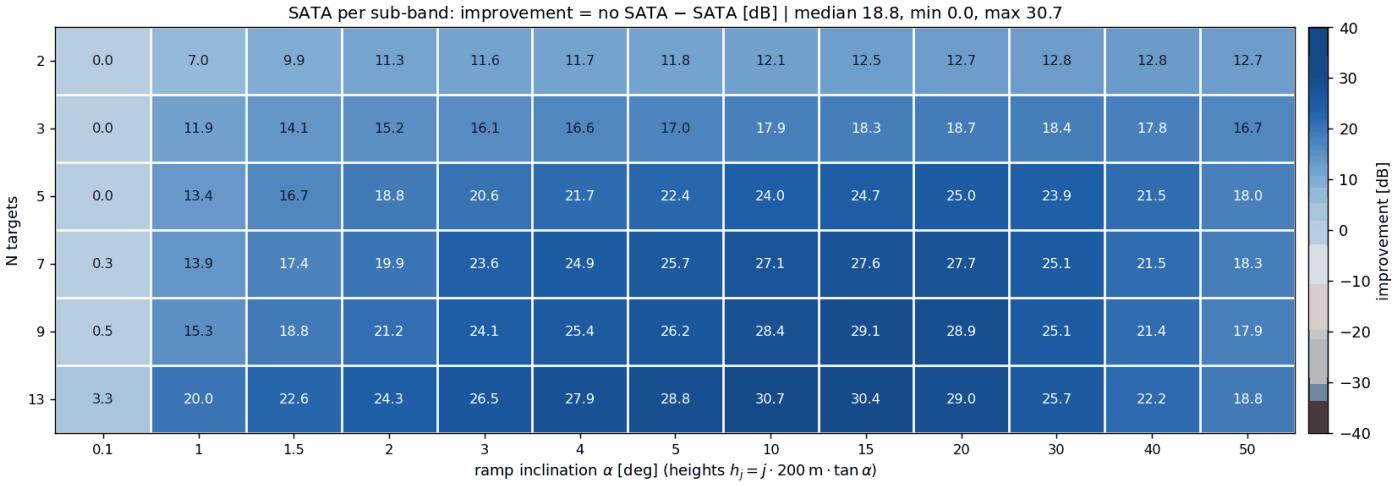


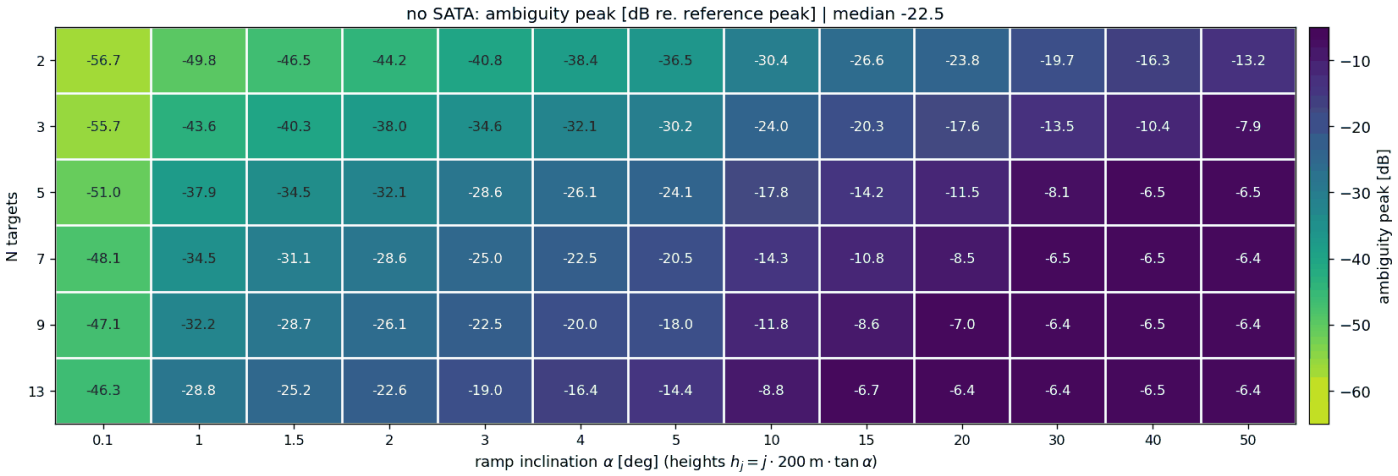



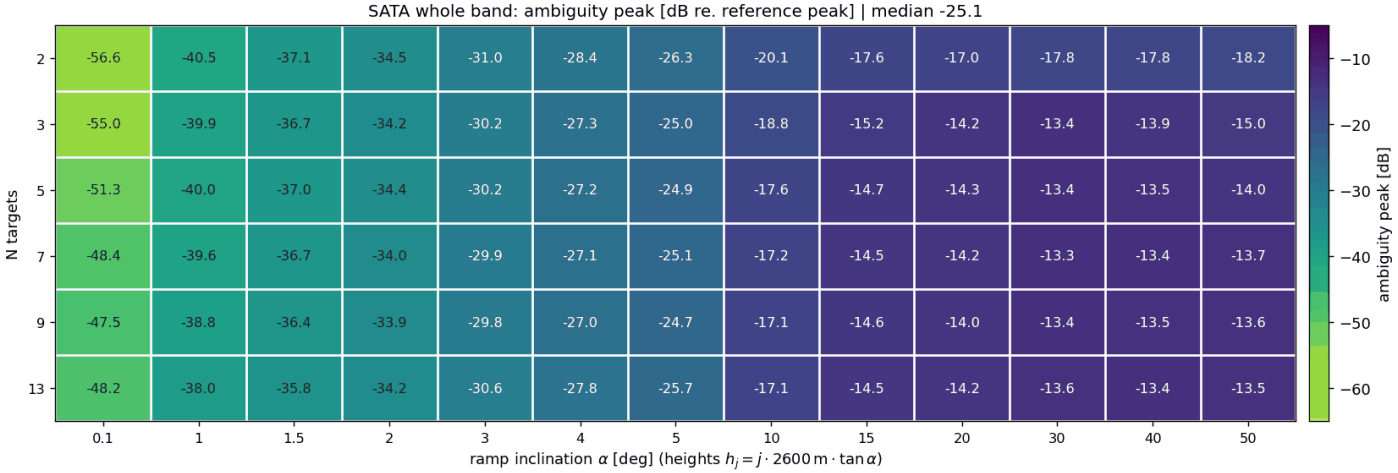
SATA 1D, along-track ramps, targets 200 m apart (small distance), large heights ($h_j = j \cdot 2600\,\mathrm{m} \cdot \tan\alpha$)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s ($m$ = 1, 2) | $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m

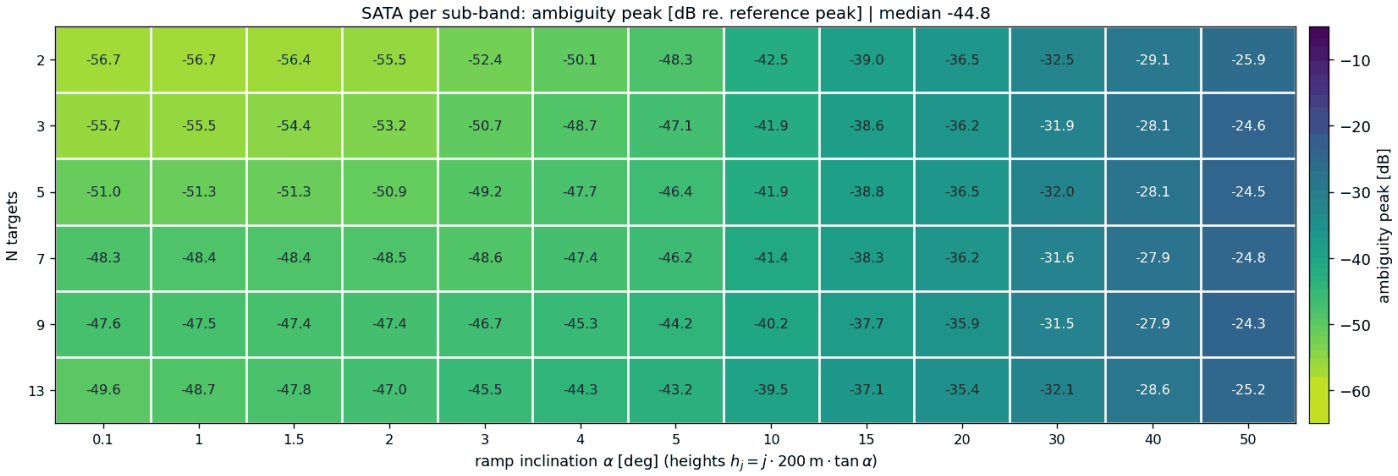


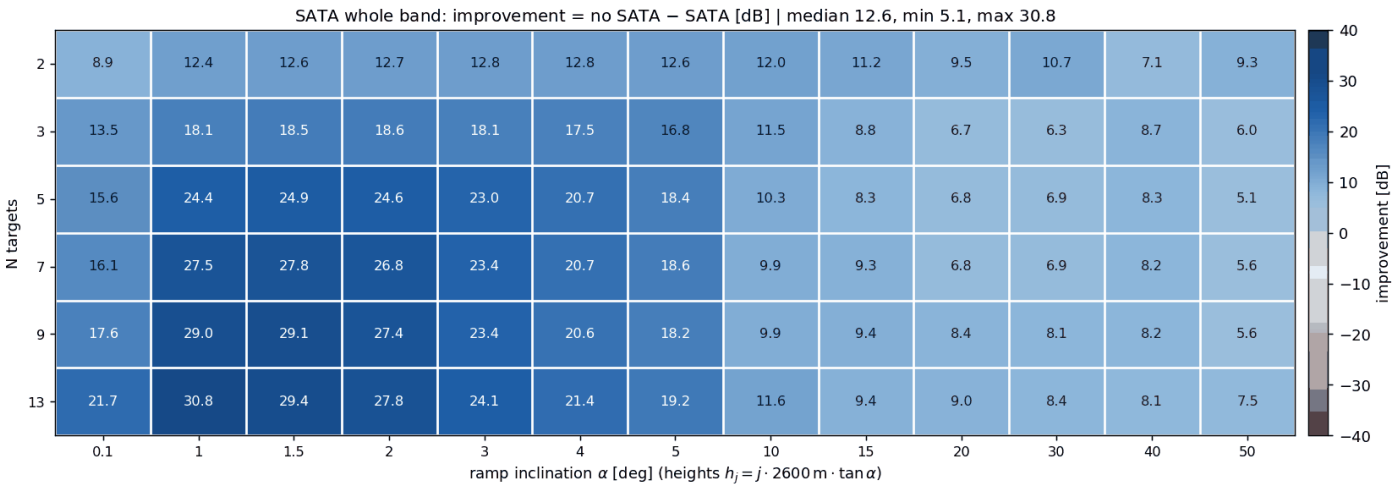


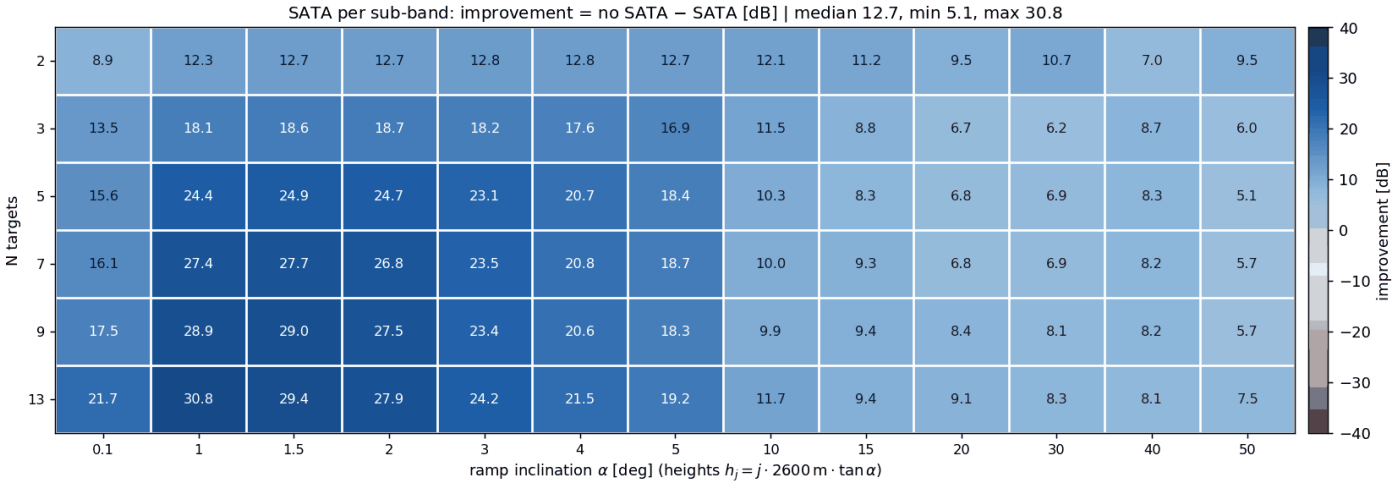
SATA 1D, along-track ramps, targets 200 m apart (small distance), large heights ($h_j = j \cdot 2600\,\mathrm{m} \cdot \tan\alpha$)
ambiguity peak at $x_j/v \pm m\,0.81$ s ($m$ = 1, 2) | $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m

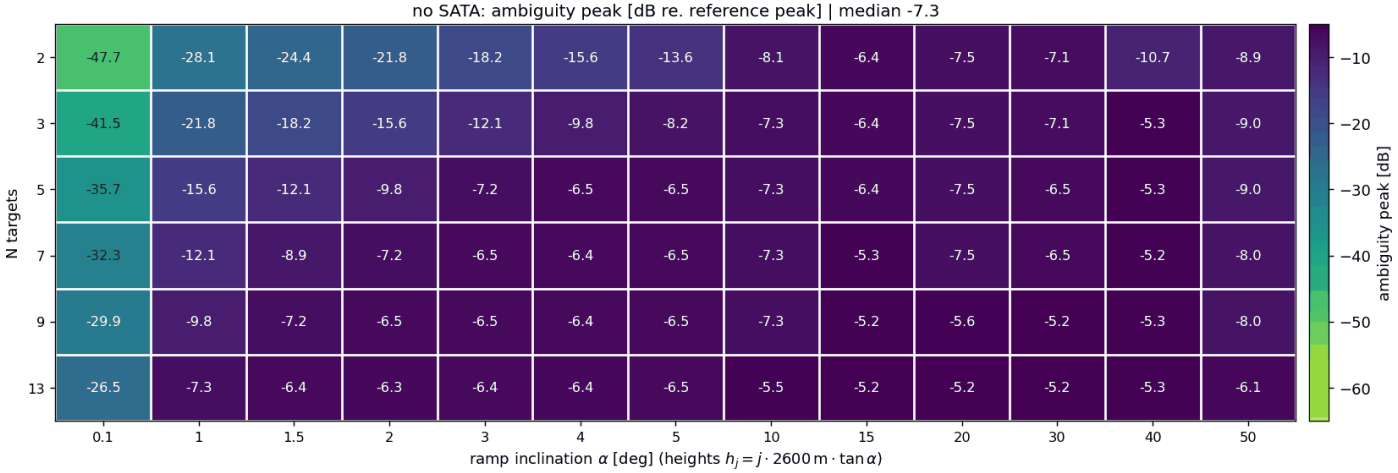


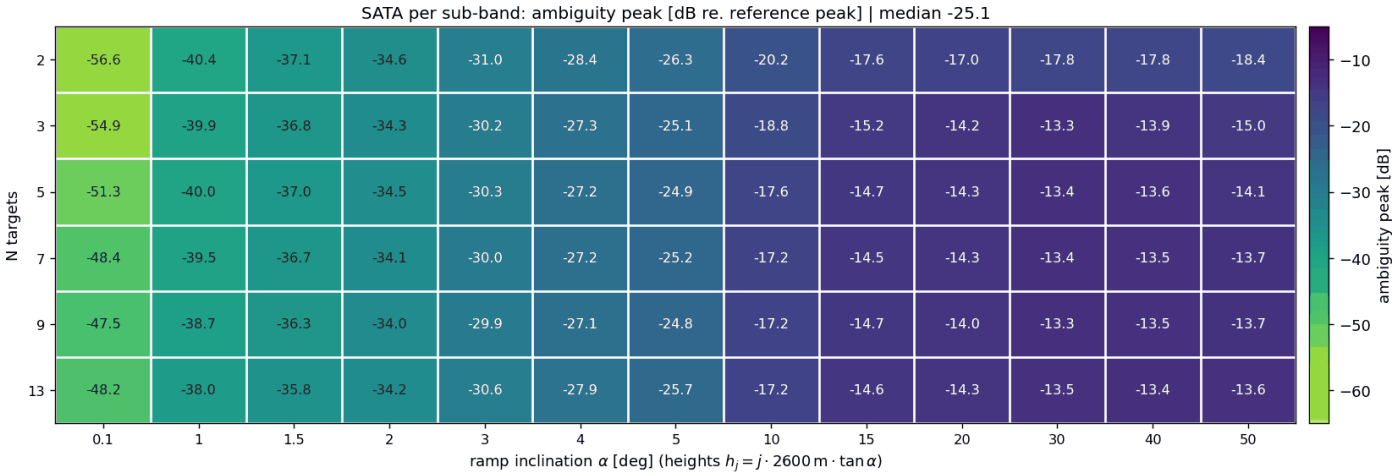



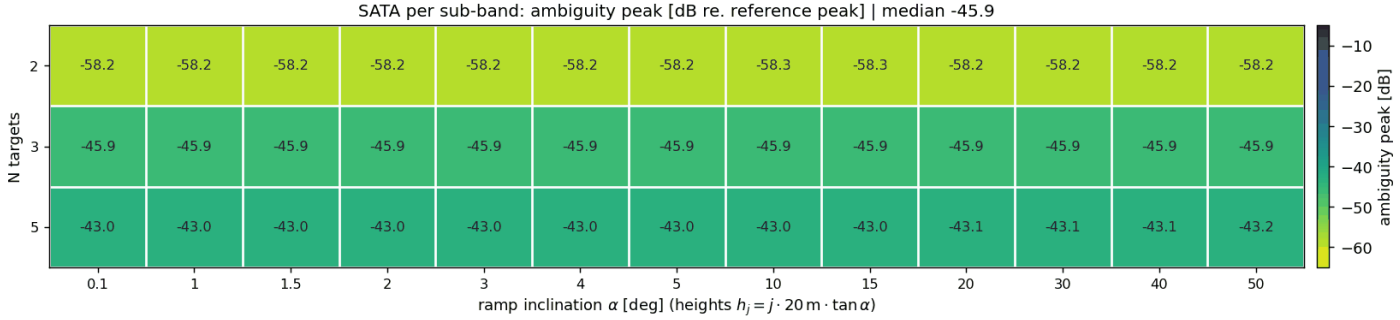


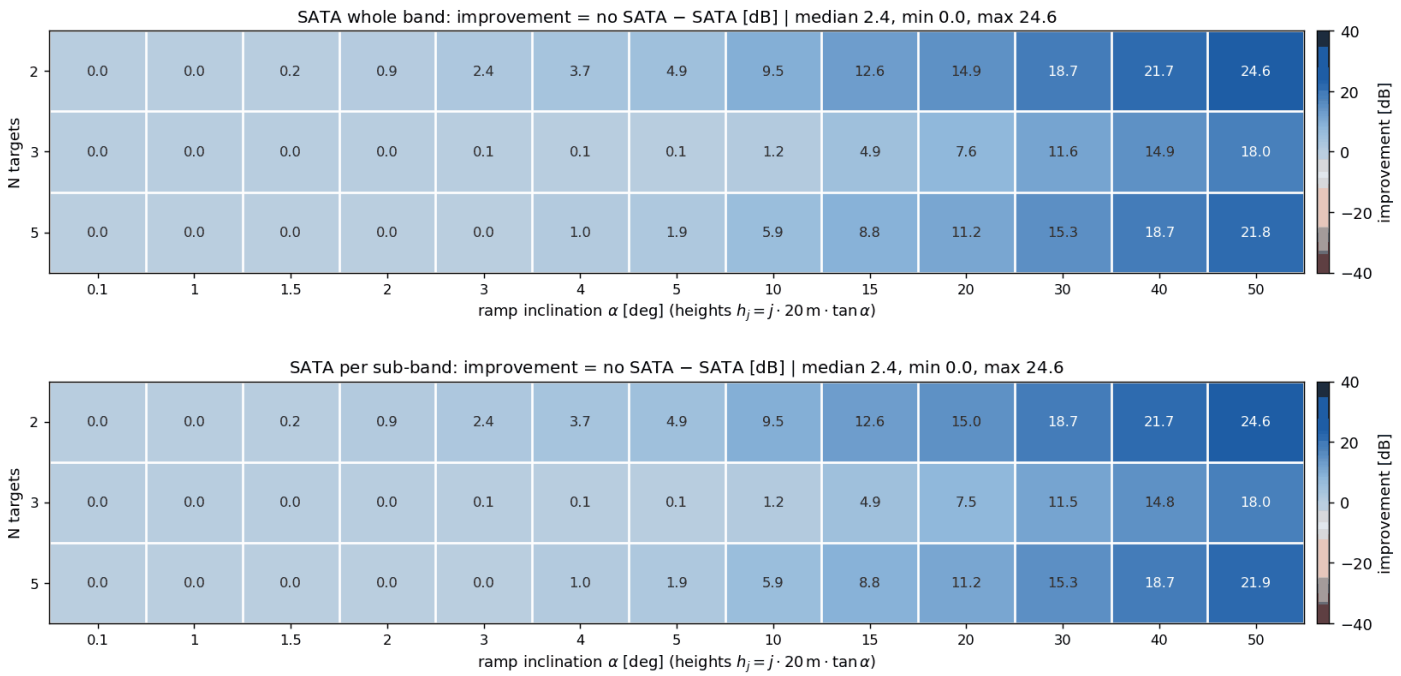
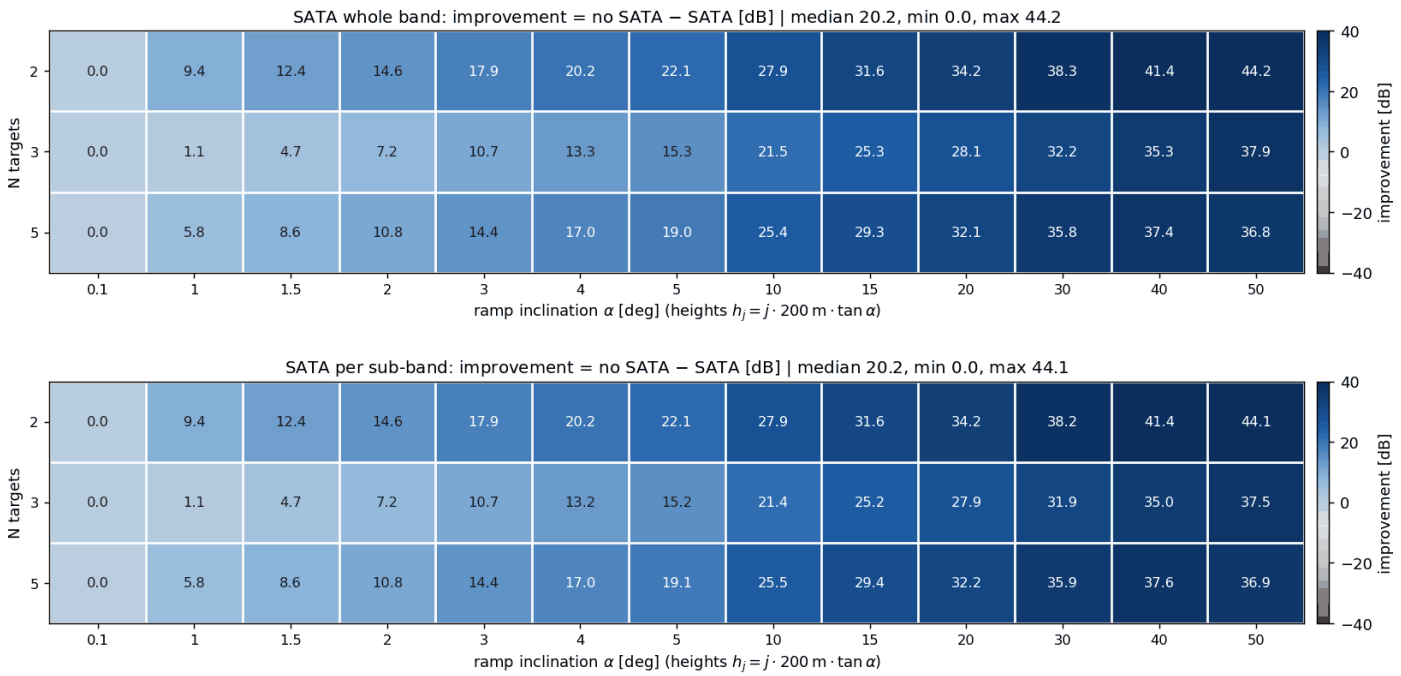

SATA 1D, along-track ramps, targets 2.6 km apart (normal distance), small heights ($h_j = j \cdot 20\,\mathrm{m} \cdot \tan\alpha$)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s ($m$ = 1, 2) | $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m
SATA whole band: improvement = no SATA − SATA [dB] | median 2.4, min 0.0, max 24.6
N targets
2 0.0 0.0 0.2 0.9 2.4 3.7 4.9 9.5 12.6 14.9 18.7 21.7 24.6
3 0.0 0.0 0.0 0.0 0.1 0.1 0.1 1.2 4.9 7.6 11.6 14.9 18.0
5 0.0 0.0 0.0 0.0 0.0 1.0 1.9 5.9 8.8 11.2 15.3 18.7 21.8
0.1 1 1.5 2 3 4 5 10 15 20 30 40 50
ramp inclination $\alpha$ [deg] (heights $h_j = j \cdot 20\,\mathrm{m} \cdot \tan\alpha$)
improvement [dB]
40 20 0 −20 −40
SATA per sub-band: improvement = no SATA − SATA [dB] | median 2.4, min 0.0, max 24.6
N targets
2 0.0 0.0 0.2 0.9 2.4 3.7 4.9 9.5 12.6 15.0 18.7 21.7 24.6
3 0.0 0.0 0.0 0.0 0.1 0.1 0.1 1.2 4.9 7.5 11.5 14.8 18.0
5 0.0 0.0 0.0 0.0 0.0 1.0 1.9 5.9 8.8 11.2 15.3 18.7 21.9
0.1 1 1.5 2 3 4 5 10 15 20 30 40 50
ramp inclination $\alpha$ [deg] (heights $h_j = j \cdot 20\,\mathrm{m} \cdot \tan\alpha$)
improvement [dB]
40 20 0 −20 −40

SATA 1D, along-track ramps, targets 2.6 km apart (normal distance), small heights ($h_j = j \cdot 20\,\mathrm{m} \cdot \tan\alpha$)
ambiguity peak at $x_j/v \pm m\,0.81$ s ($m$ = 1, 2) | $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m

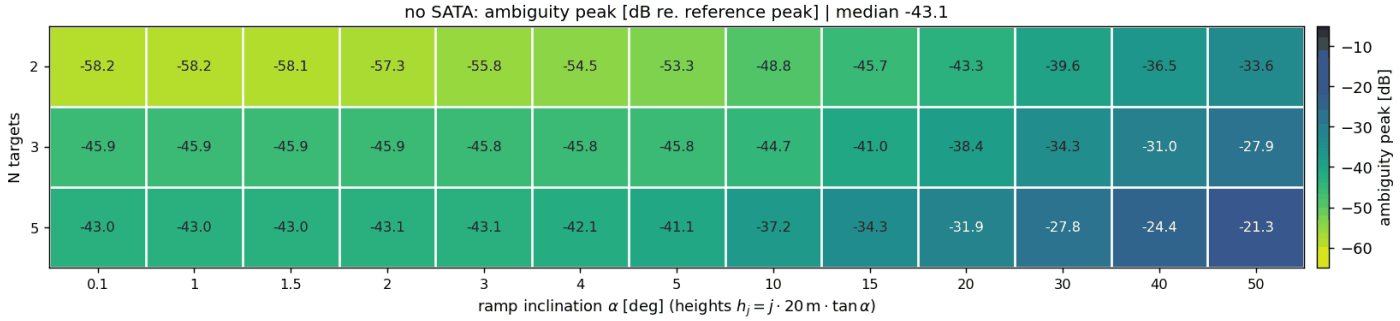


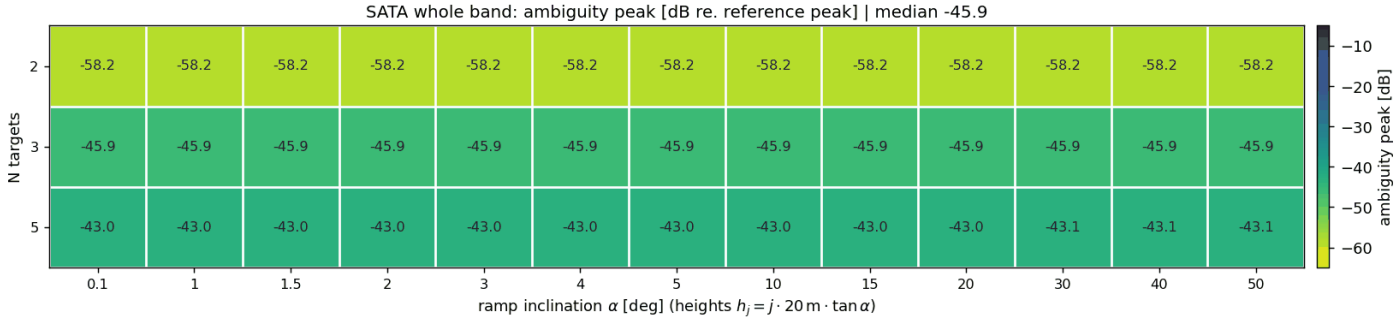



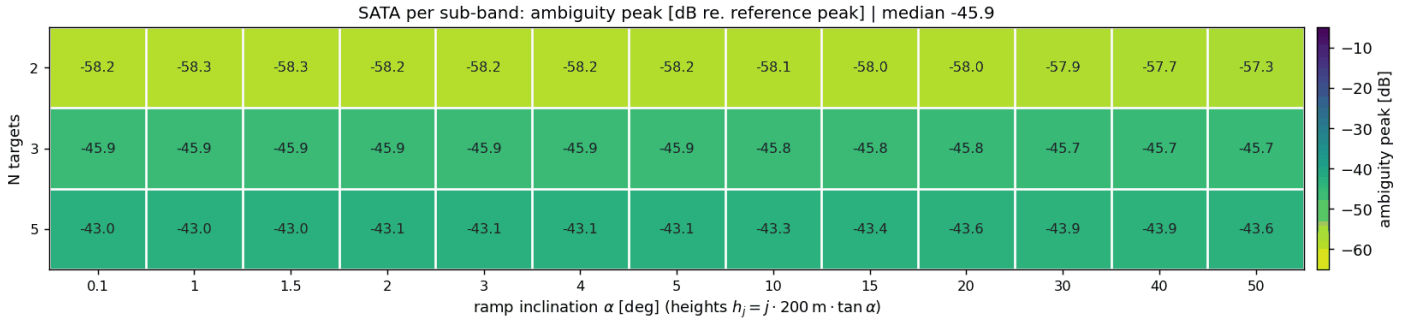




SATA 1D, along-track ramps, targets 2.6 km apart (normal distance), normal heights ($h_j = j \cdot 200\,\mathrm{m} \cdot \tan\alpha$)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s ($m$ = 1, 2) | $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m
SATA whole band: improvement = no SATA − SATA [dB] | median 20.2, min 0.0, max 44.2
N targets
2
3
5
0.0 9.4 12.4 14.6 17.9 20.2 22.1 27.9 31.6 34.2 38.3 41.4 44.2
0.0 1.1 4.7 7.2 10.7 13.3 15.3 21.5 25.3 28.1 32.2 35.3 37.9
0.0 5.8 8.6 10.8 14.4 17.0 19.0 25.4 29.3 32.1 35.8 37.4 36.8
0.1 1 1.5 2 3 4 5 10 15 20 30 40 50
ramp inclination $\alpha$ [deg] (heights $h_j = j \cdot 200\,\mathrm{m} \cdot \tan\alpha$)
improvement [dB]
40 20 0 −20 −40
SATA per sub-band: improvement = no SATA − SATA [dB] | median 20.2, min 0.0, max 44.1
N targets
2
3
5
0.0 9.4 12.4 14.6 17.9 20.2 22.1 27.9 31.6 34.2 38.2 41.4 44.1
0.0 1.1 4.7 7.2 10.7 13.2 15.2 21.4 25.2 27.9 31.9 35.0 37.5
0.0 5.8 8.6 10.8 14.4 17.0 19.1 25.5 29.4 32.2 35.9 37.6 36.9
0.1 1 1.5 2 3 4 5 10 15 20 30 40 50
ramp inclination $\alpha$ [deg] (heights $h_j = j \cdot 200\,\mathrm{m} \cdot \tan\alpha$)
improvement [dB]
40 20 0 −20 −40

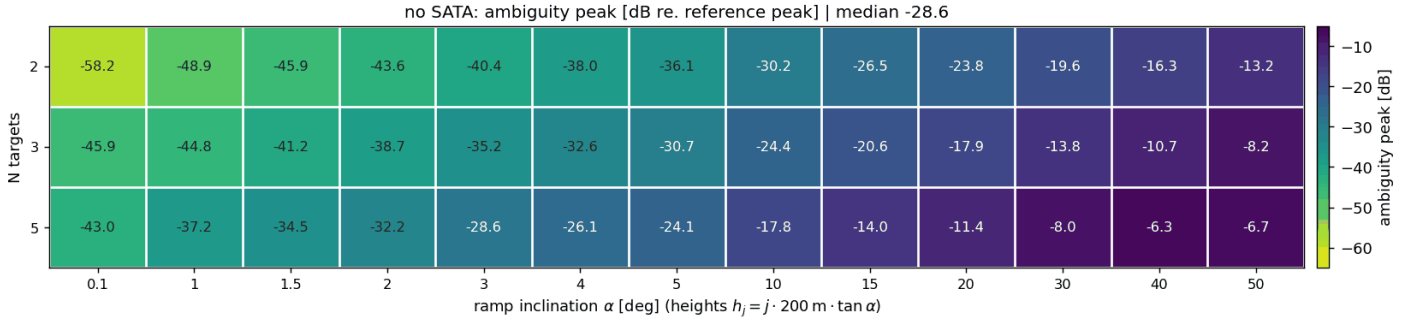
SATA 1D, along-track ramps, targets 2.6 km apart (normal distance), normal heights ($h_j = j \cdot 200\,\mathrm{m} \cdot \tan\alpha$)
ambiguity peak at $x_j/v \pm m\,0.81$ s ($m$ = 1, 2) | $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m

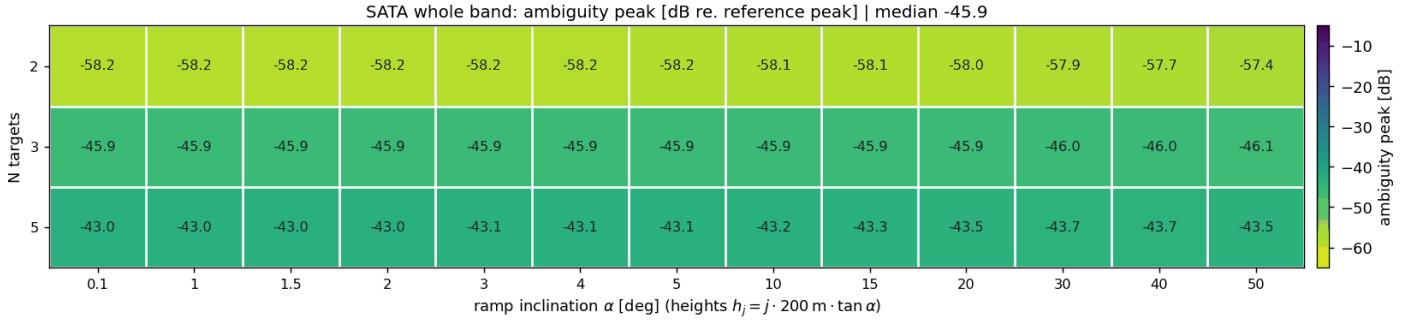






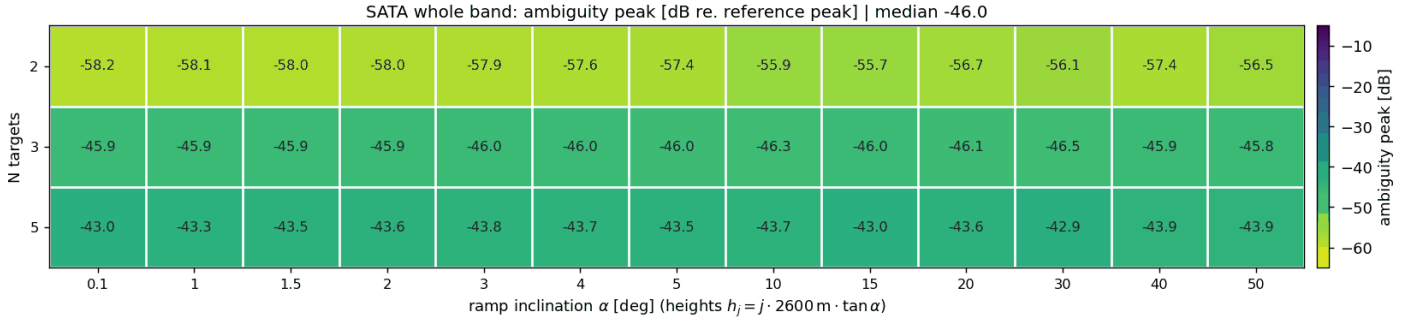
SATA 1D, along-track ramps, targets 2.6 km apart (normal distance), large heights ($h_j = j \cdot 2600\,\mathrm{m} \cdot \tan\alpha$)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s ($m$ = 1, 2) | $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m

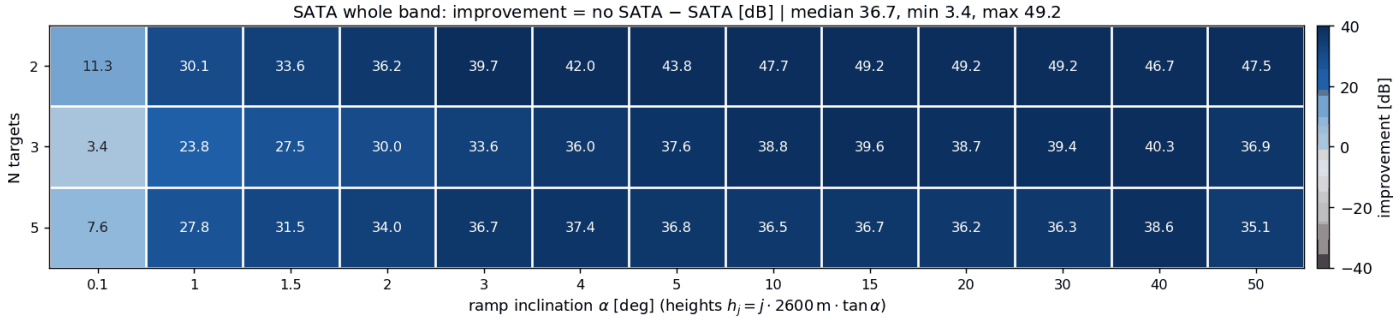



SATA 1D, along-track ramps, targets 2.6 km apart (normal distance), large heights ($h_j = j \cdot 2600\,\mathrm{m} \cdot \tan\alpha$)
ambiguity peak at $x_j/v \pm m\,0.81$ s ($m$ = 1, 2) | $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m

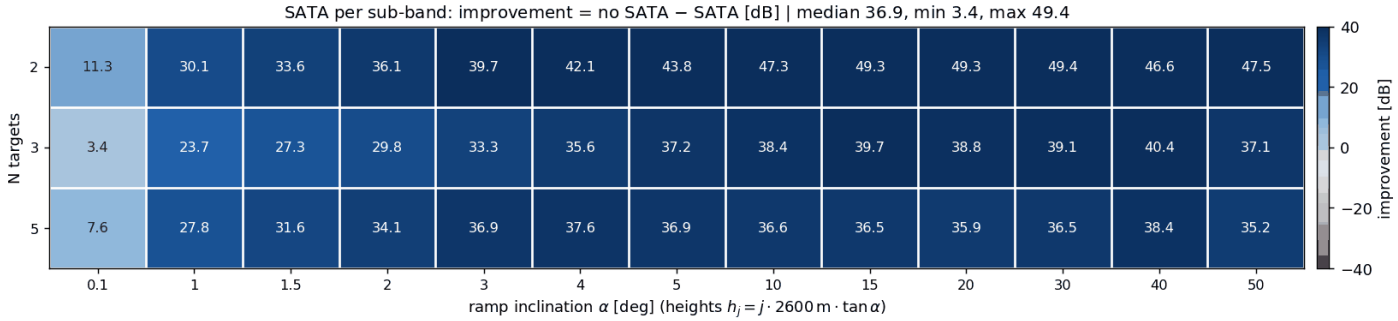


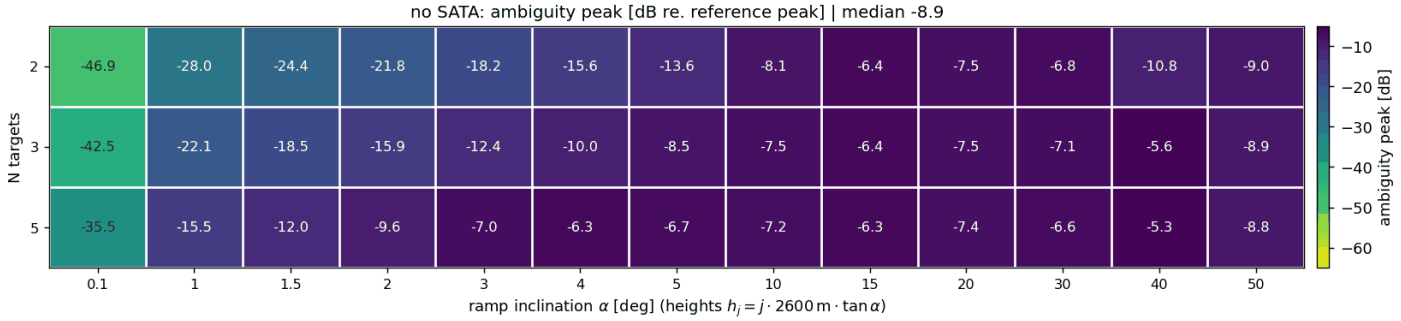



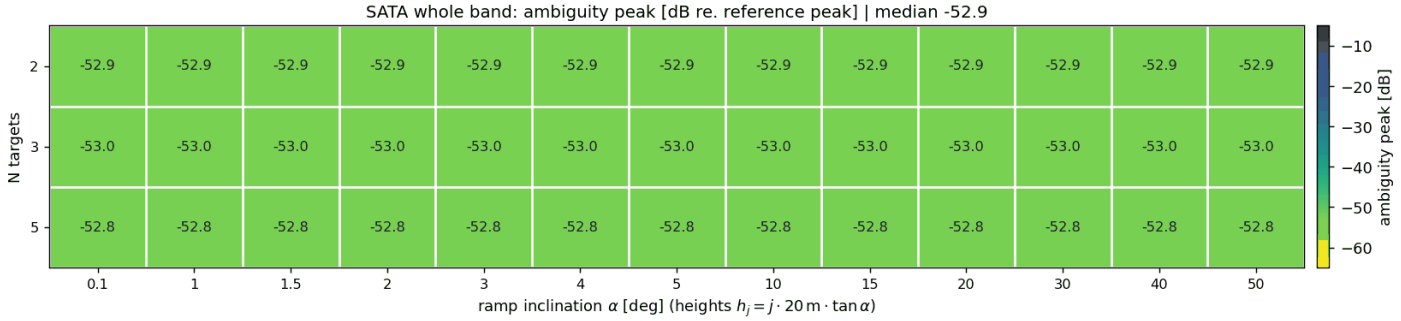
SATA 1D, along-track ramps, targets 10 km apart (large distance), small heights ($h_j = j \cdot 20\,\mathrm{m} \cdot \tan\alpha$)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s ($m$ = 1, 2) | $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m

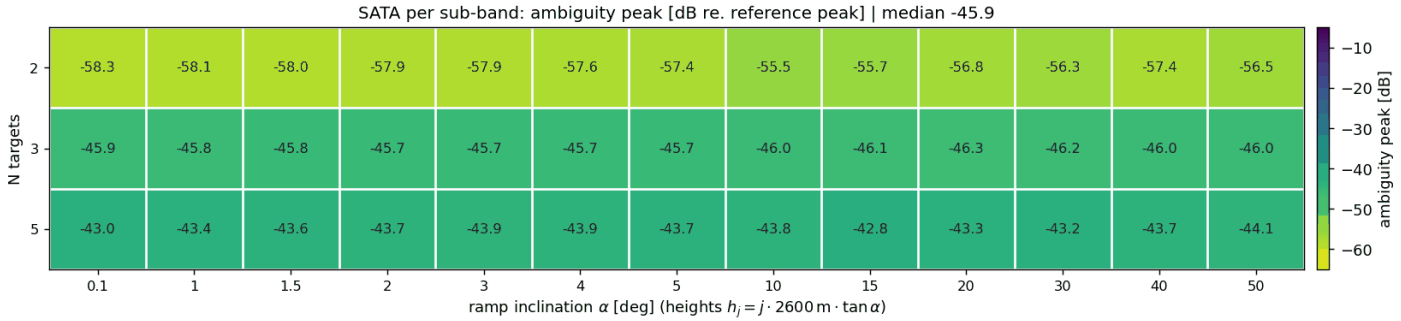


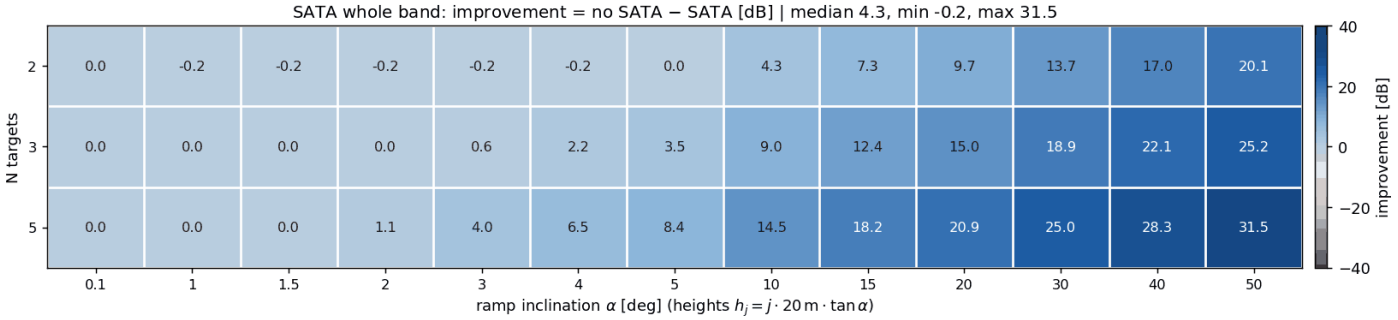
SATA 1D, along-track ramps, targets 10 km apart (large distance), small heights ($h_j = j \cdot 20\,\mathrm{m} \cdot \tan\alpha$)
ambiguity peak at $x_j/v \pm m\,0.81$ s ($m$ = 1, 2) | $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m

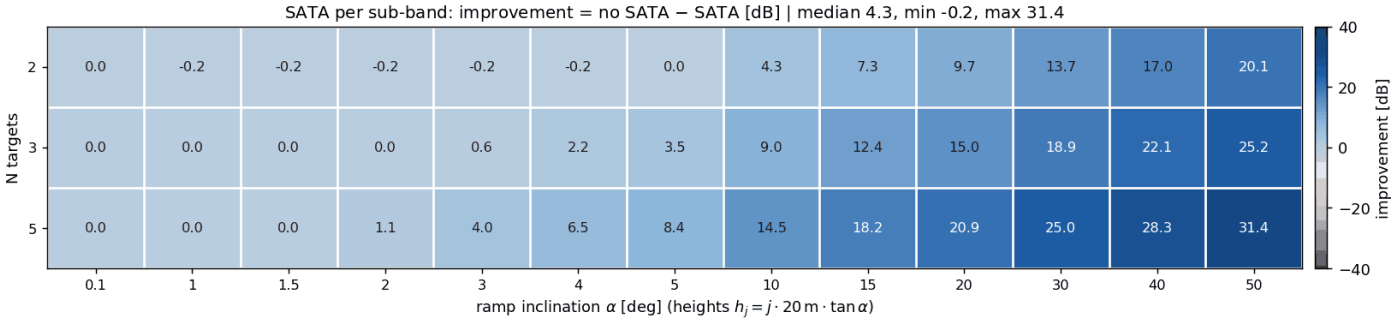


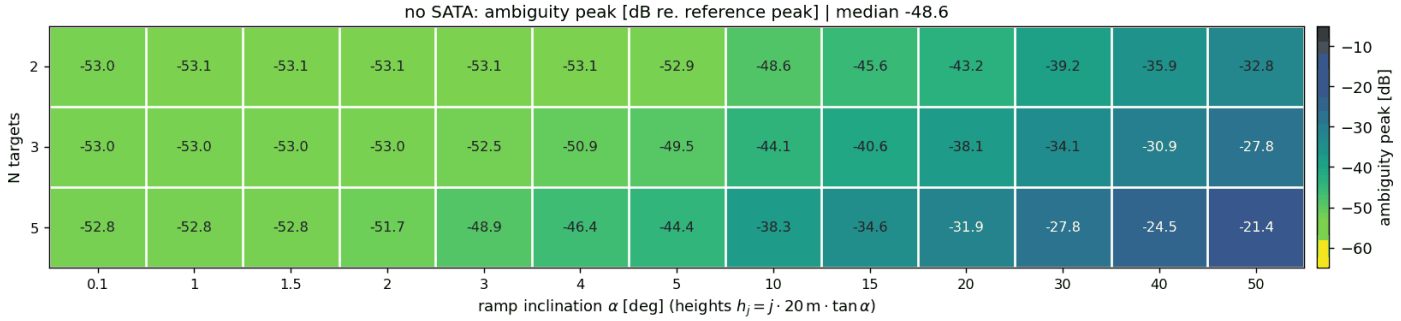



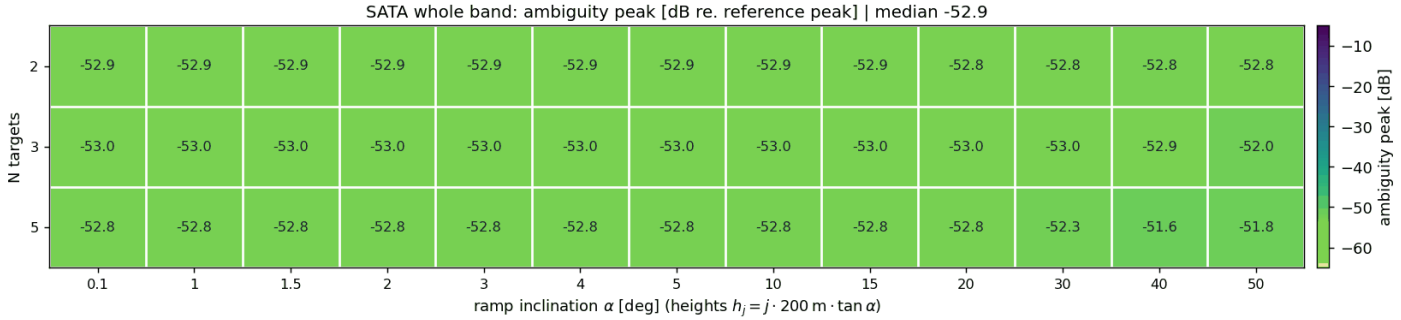
SATA 1D, along-track ramps, targets 10 km apart (large distance), normal heights ($h_j = j \cdot 200\,\mathrm{m} \cdot \tan\alpha$)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s ($m$ = 1, 2) | $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m

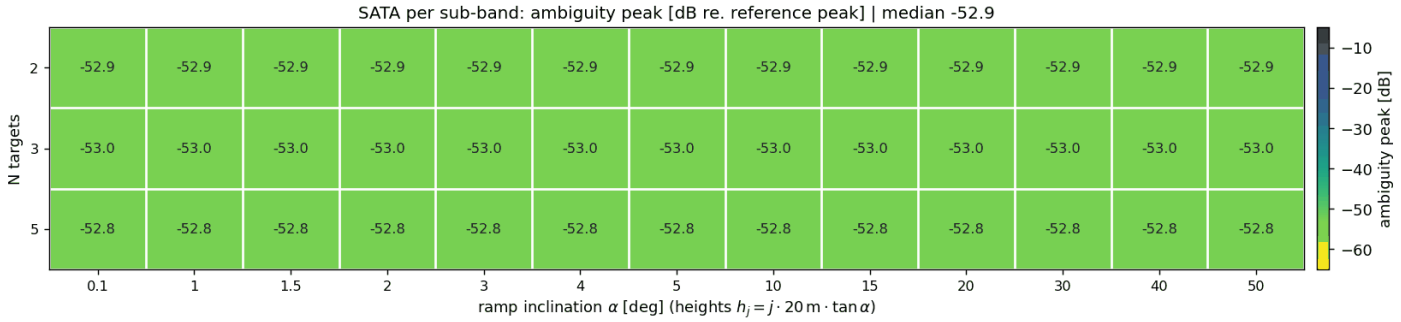


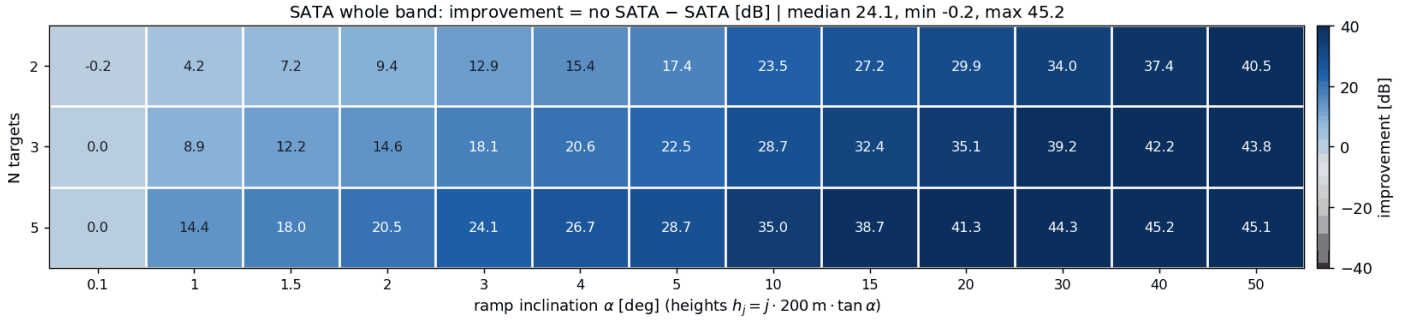
SATA 1D, along-track ramps, targets 10 km apart (large distance), normal heights ($h_j = j \cdot 200\,\mathrm{m} \cdot \tan\alpha$)
ambiguity peak at $x_j/v \pm m\,0.81$ s ($m$ = 1, 2) | $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m

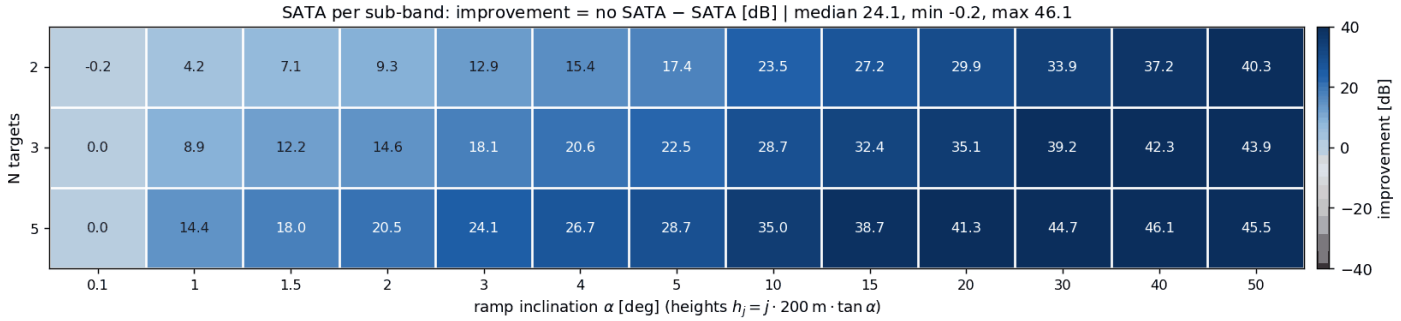


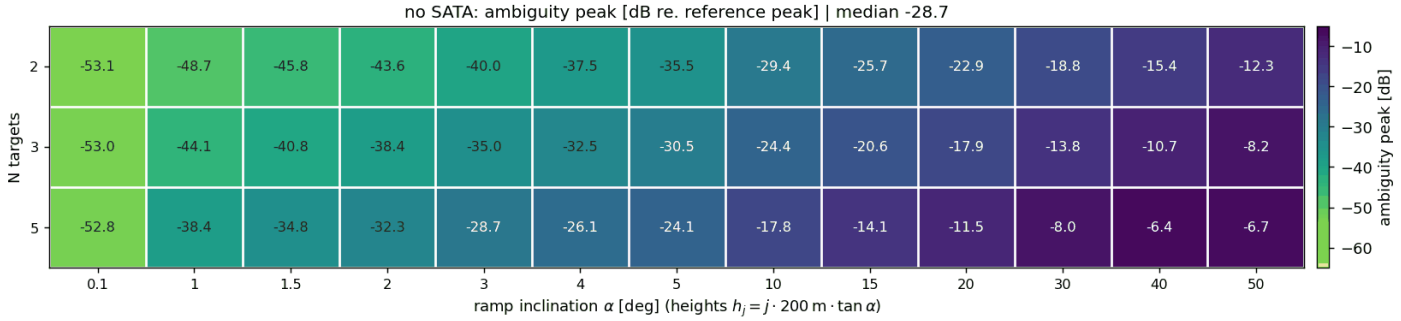



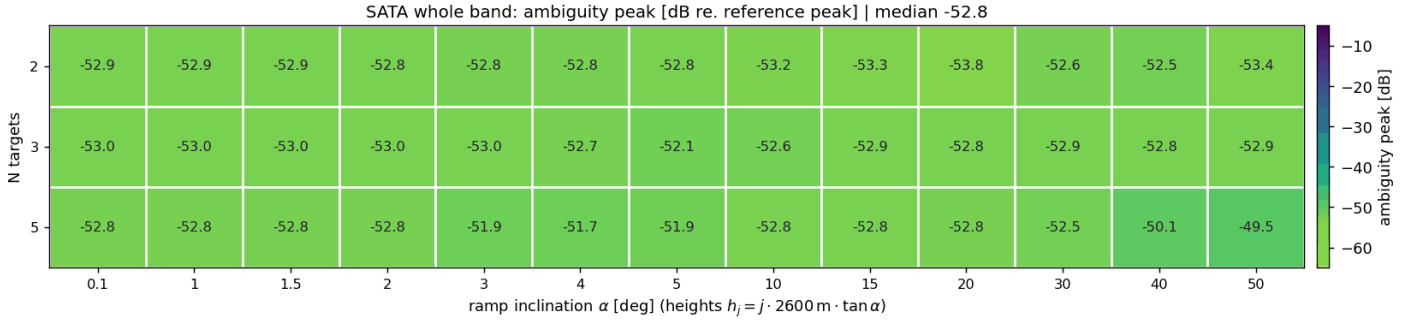
SATA 1D, along-track ramps, targets 10 km apart (large distance), large heights ($h_j = j \cdot 2600\,\mathrm{m} \cdot \tan\alpha$)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s ($m$ = 1, 2) | $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m

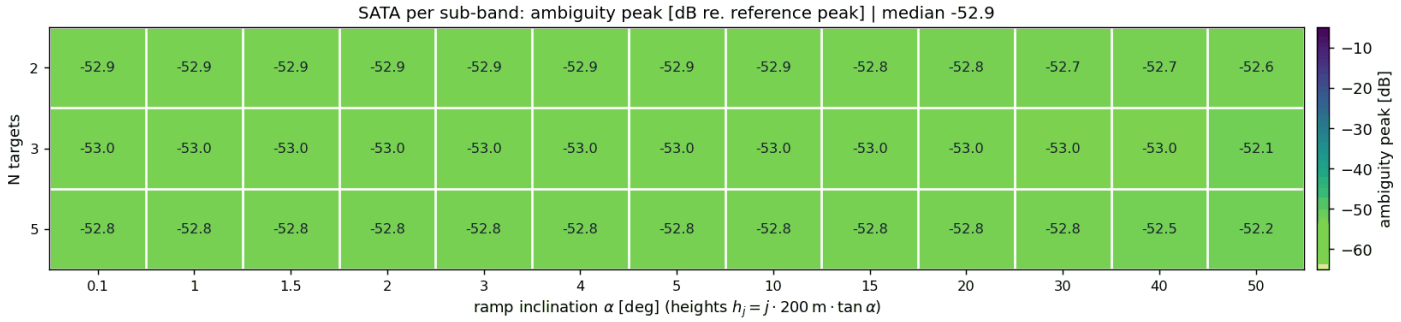


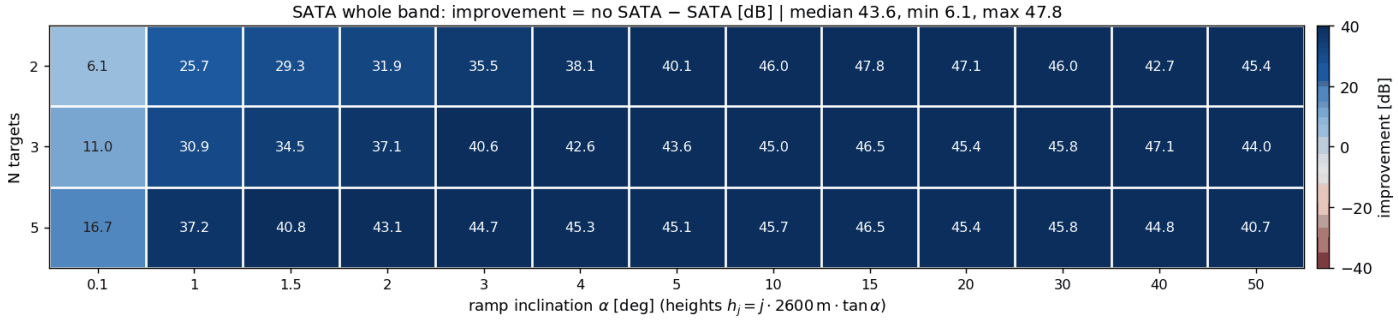SATA 1D, along-track ramps, targets 10 km apart (large distance), large heights ($h_j = j \cdot 2600\,\mathrm{m} \cdot \tan\alpha$)
ambiguity peak at $x_j/v \pm m\,0.81$ s ($m$ = 1, 2) | $b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m

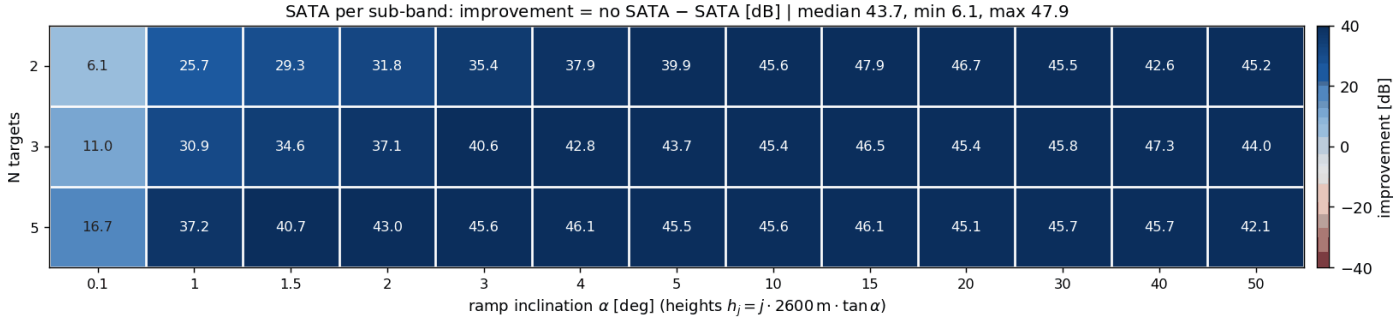


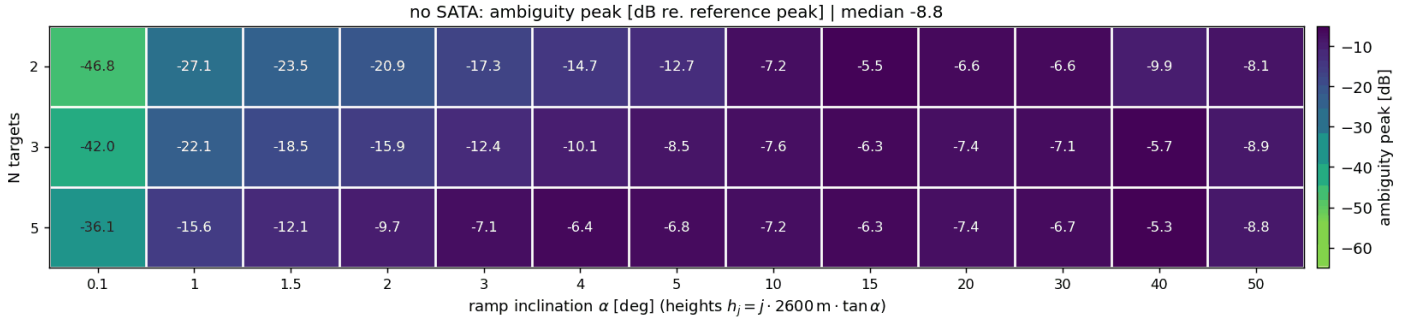



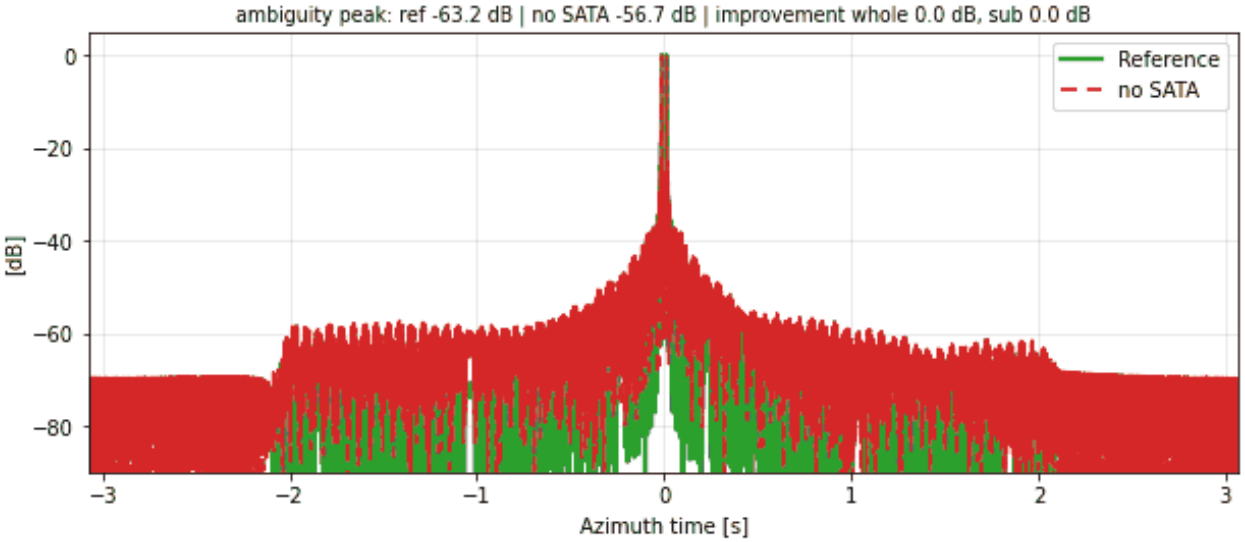


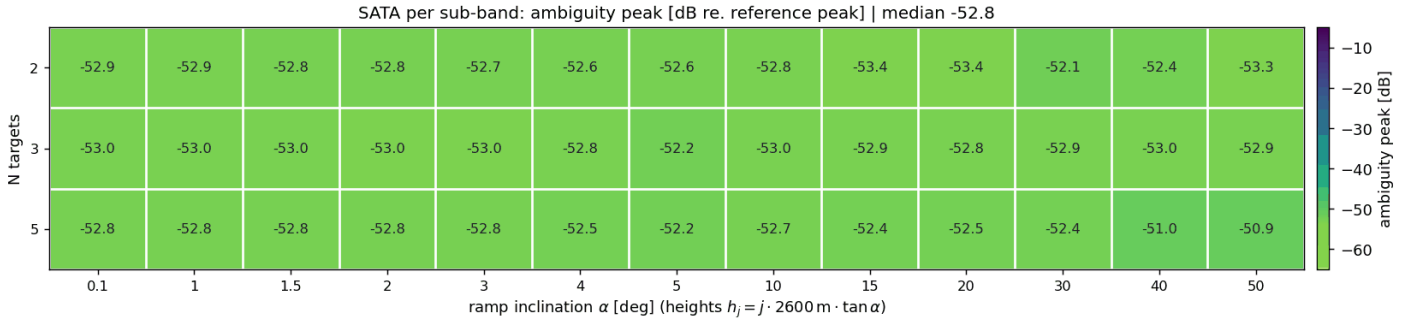
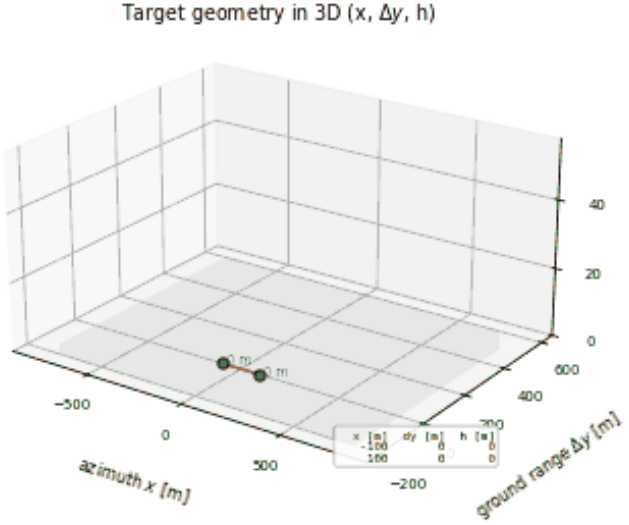
RA-SS-001 | SATA 1D | along-track ramp: N = 2, $\alpha = 0.1°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

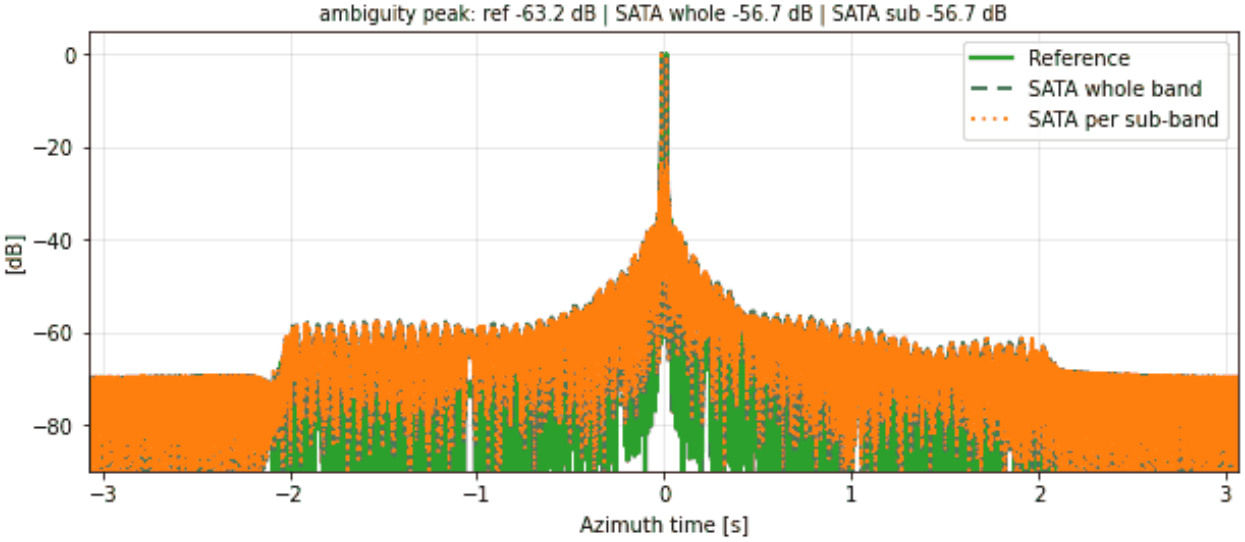


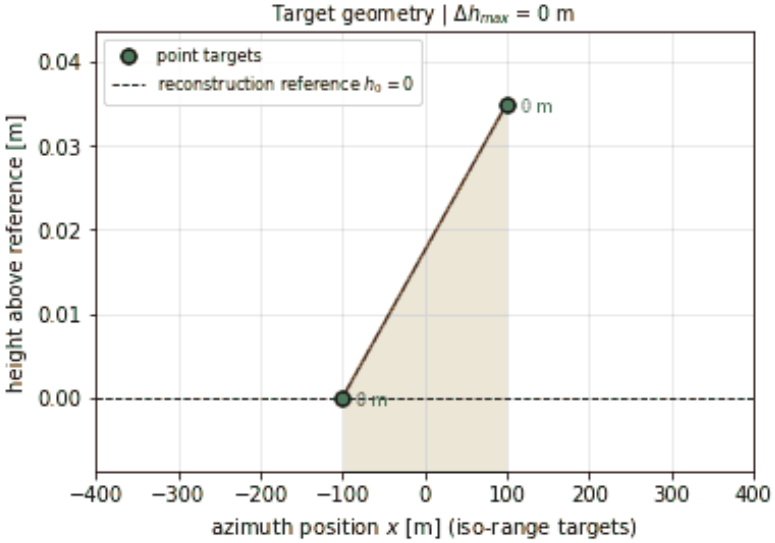



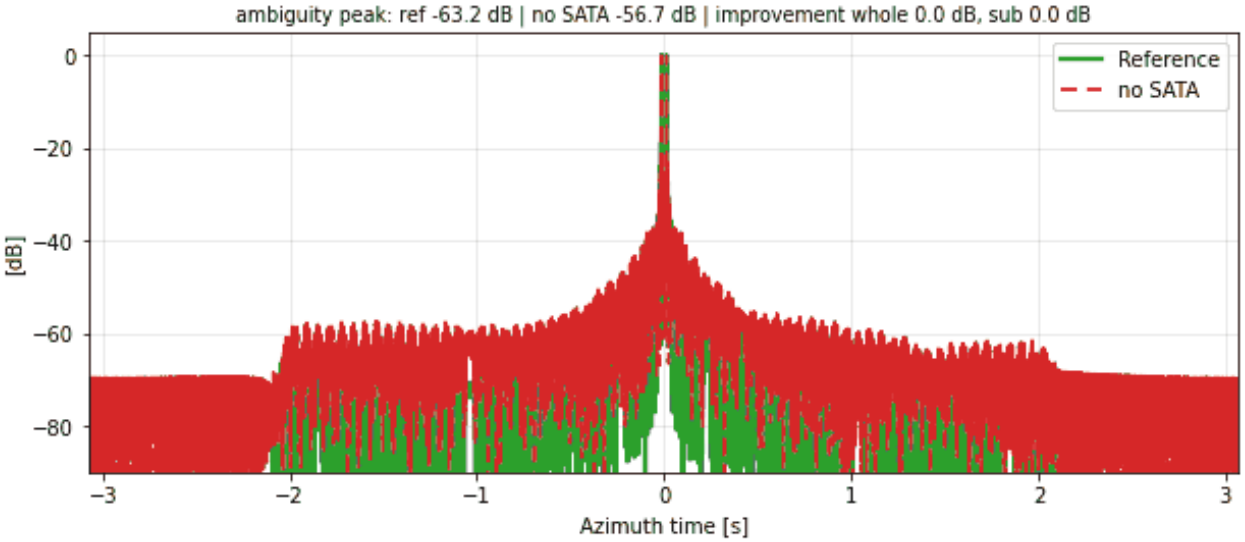



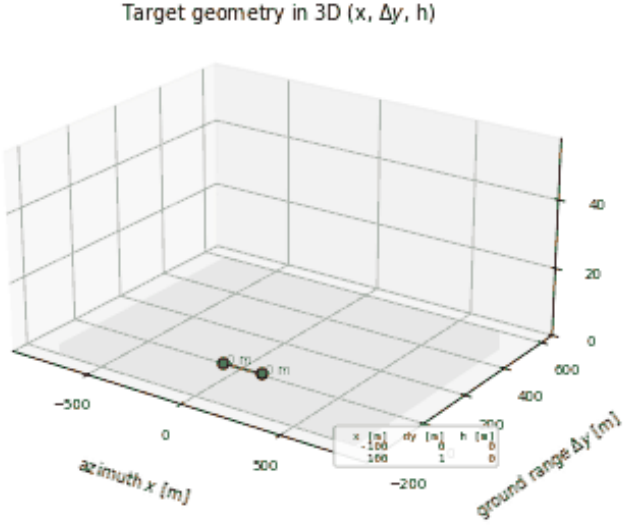



RA-SS-002 | SATA 1D | along-track ramp: N = 2, $\alpha = 1°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

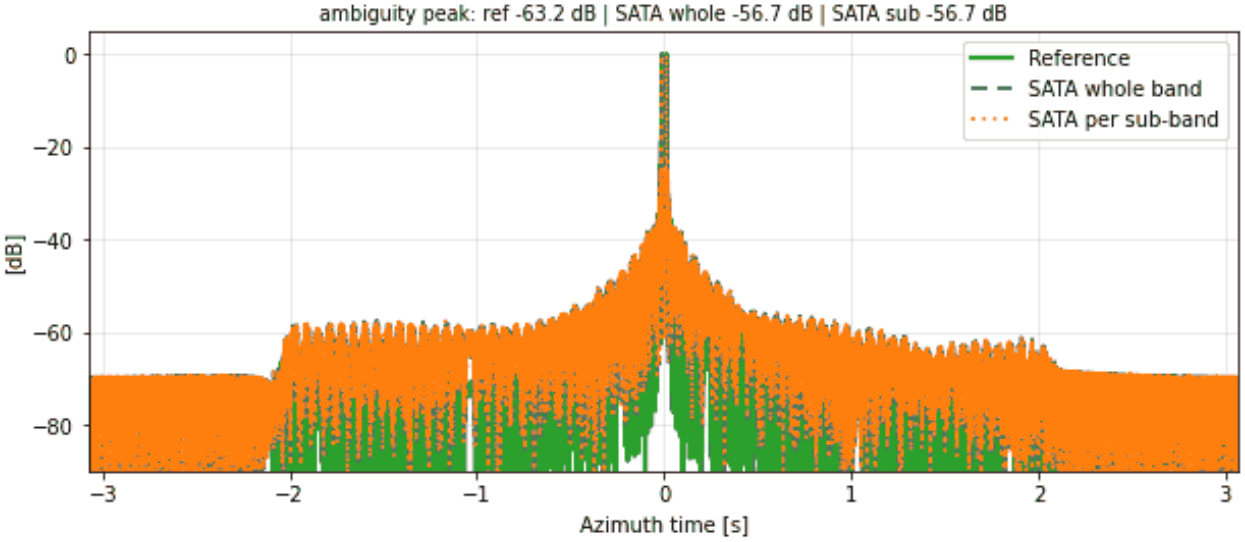

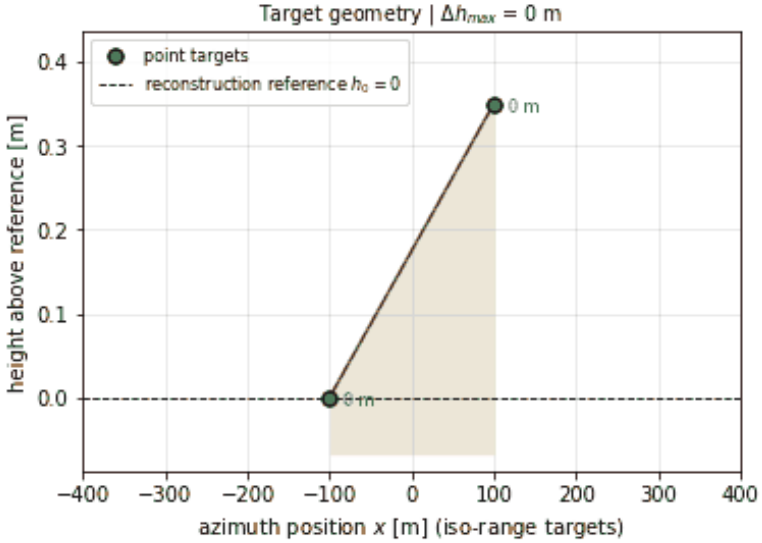



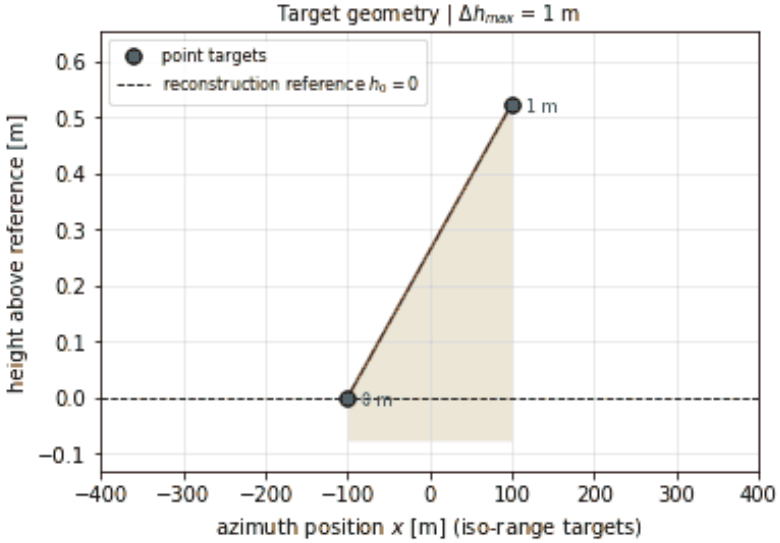



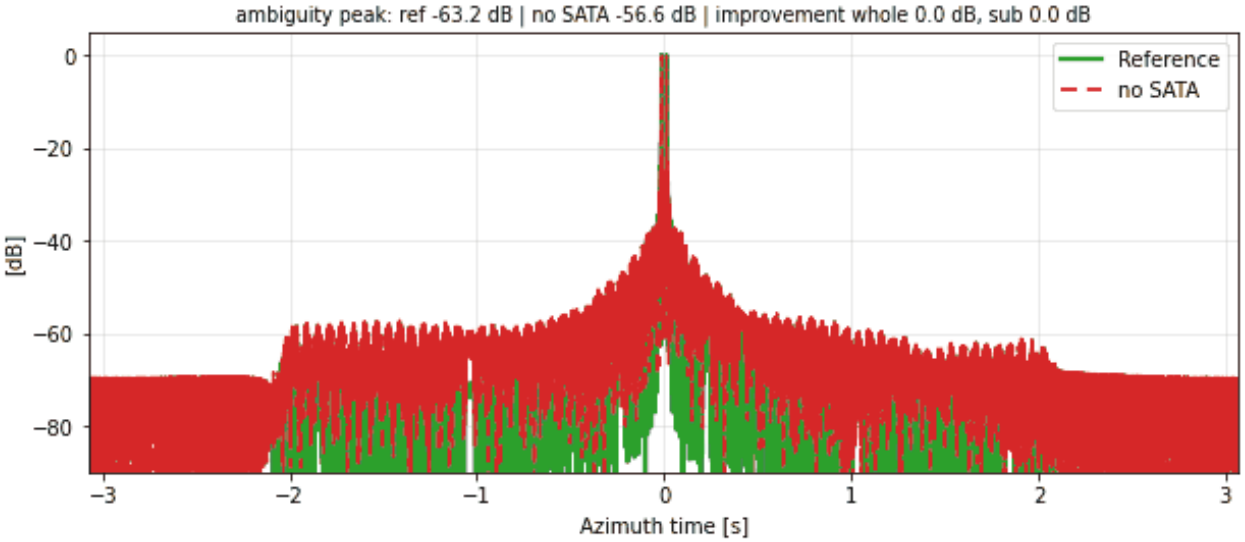



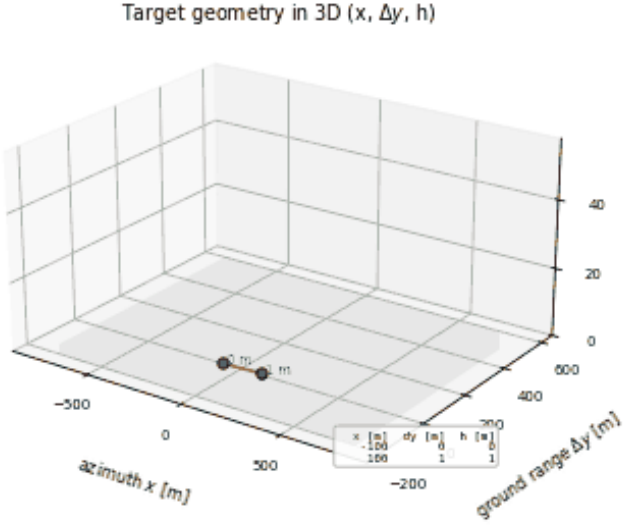
RA-SS-003 | SATA 1D | along-track ramp: N = 2, $\alpha = 1.5°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

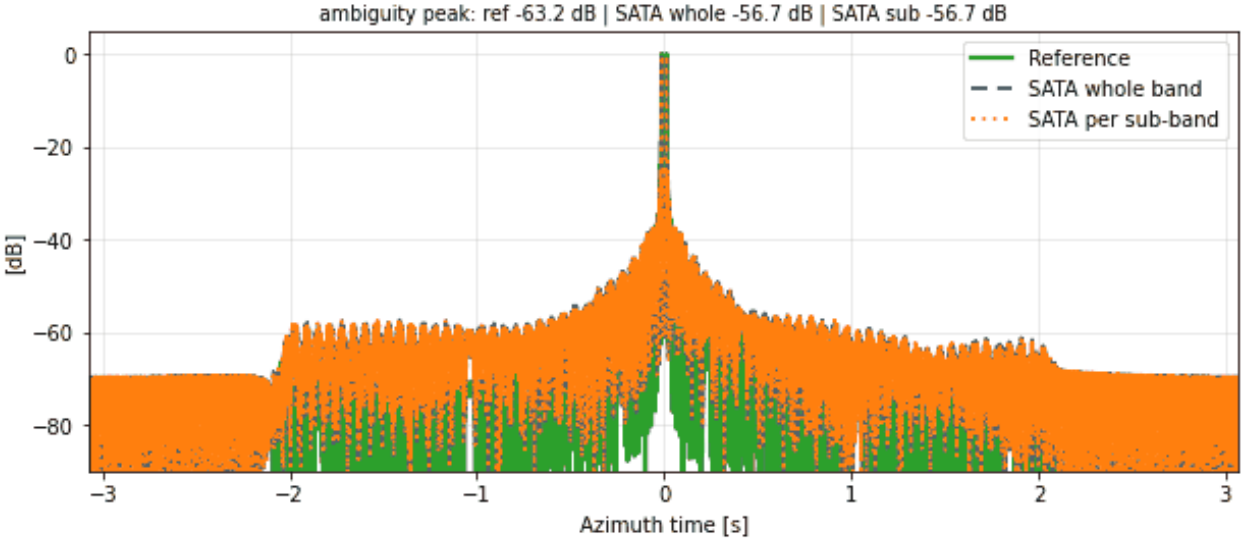





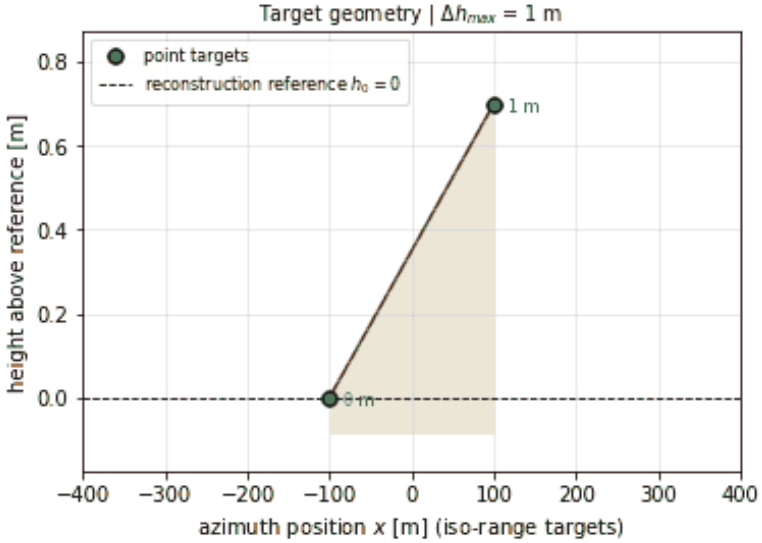



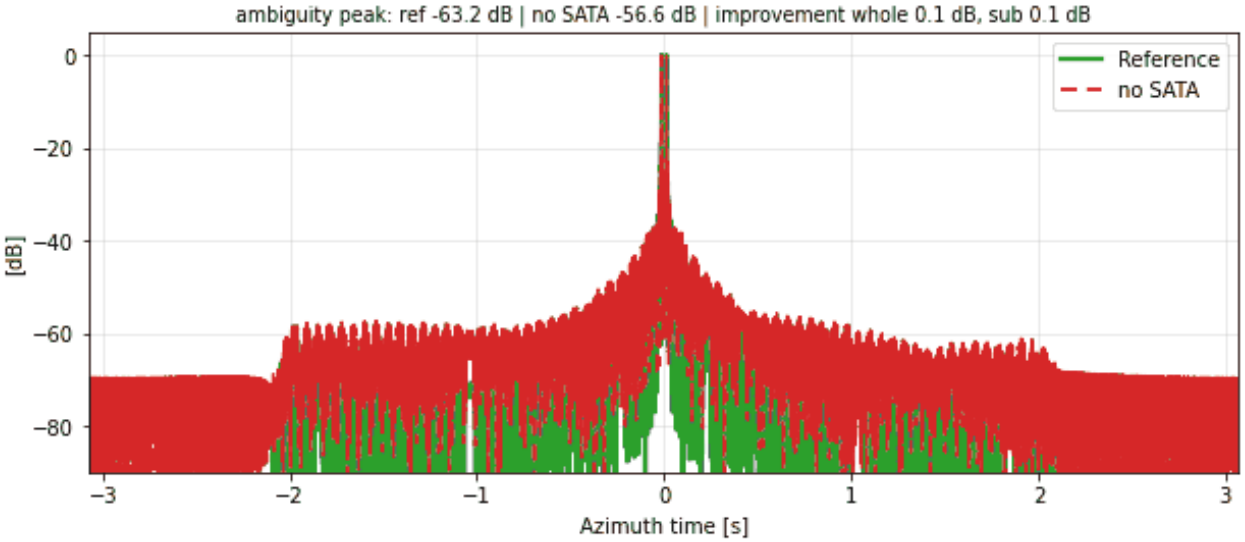



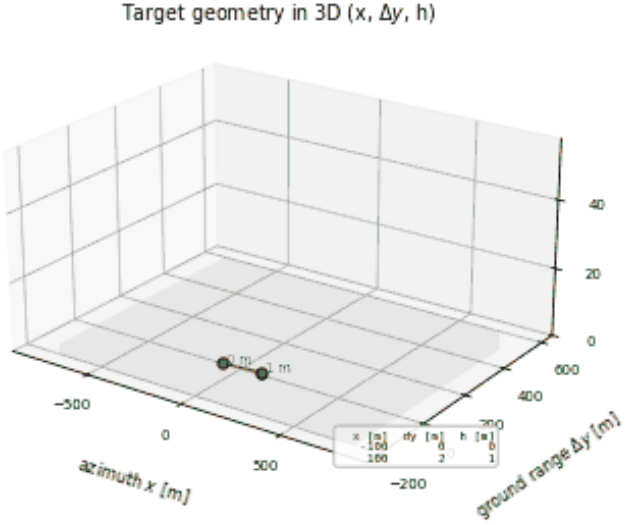
RA-SS-004 | SATA 1D | along-track ramp: N = 2, $\alpha = 2°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

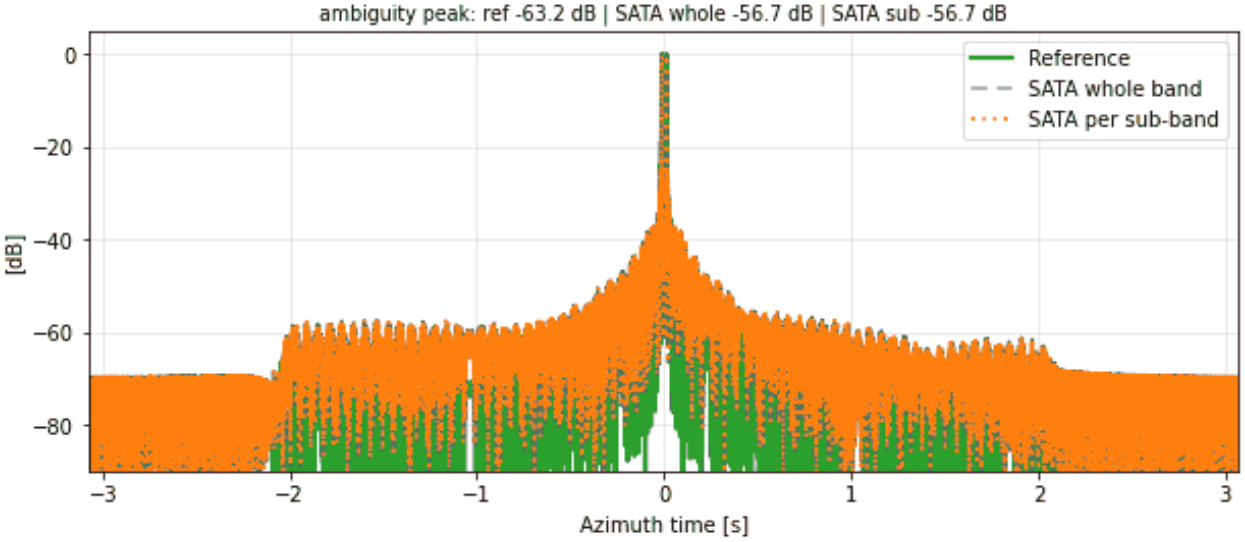






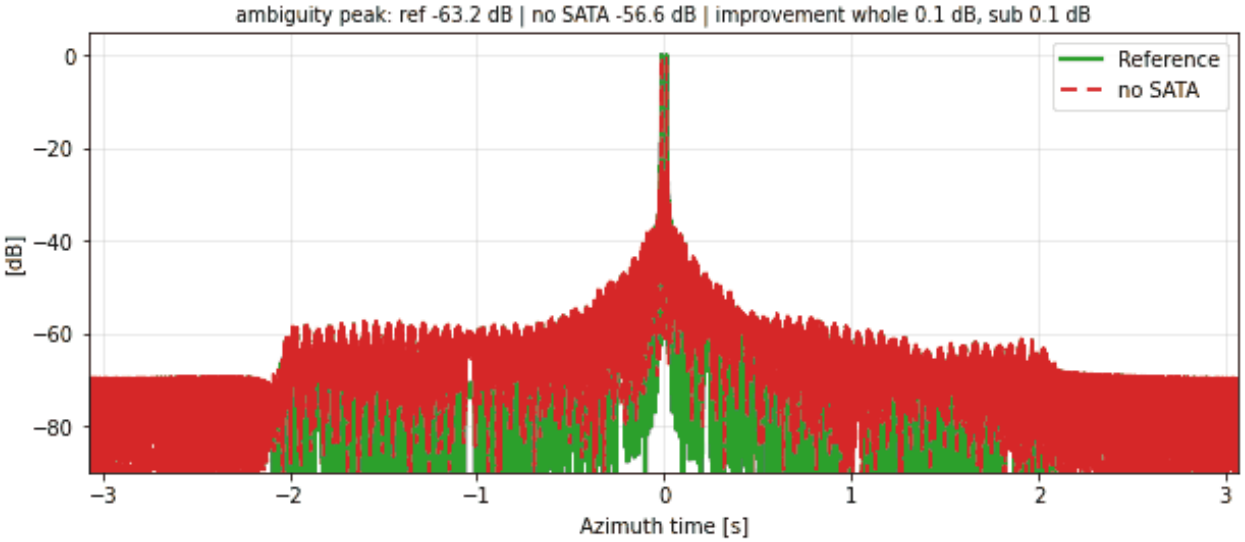



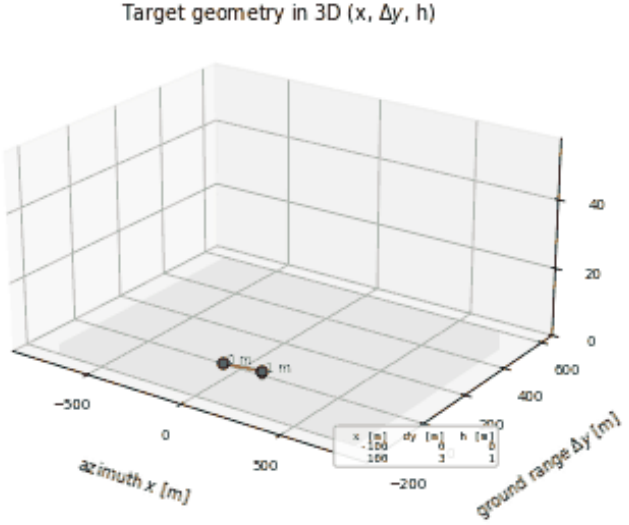



RA-SS-005 | SATA 1D | along-track ramp: N = 2, $\alpha = 3°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

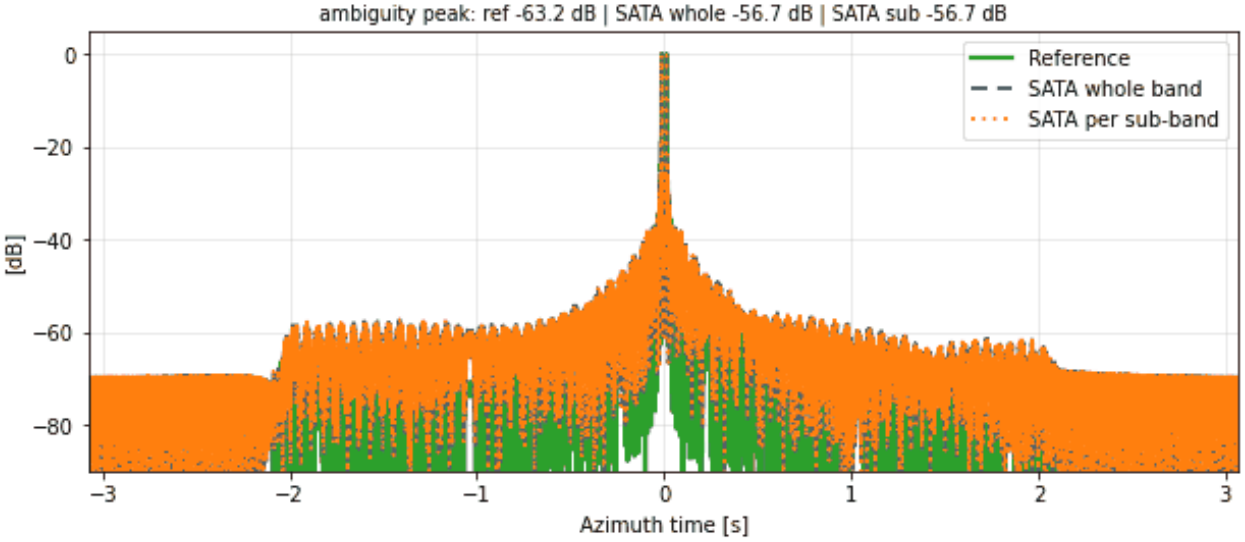


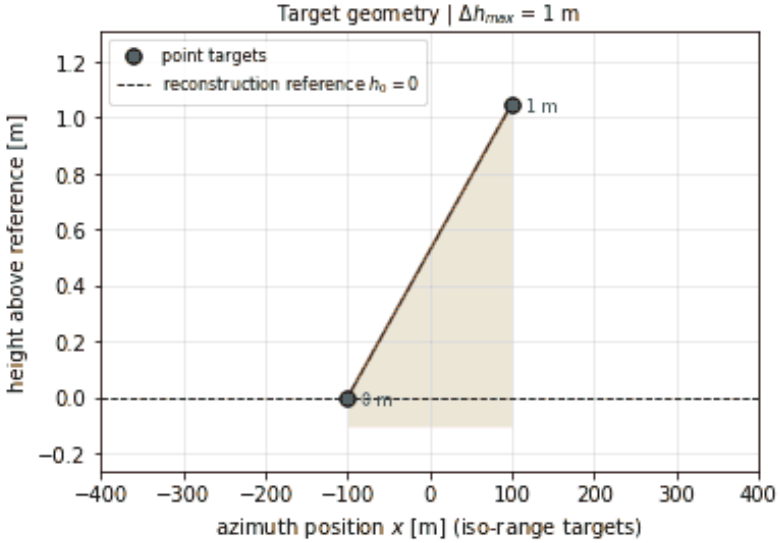



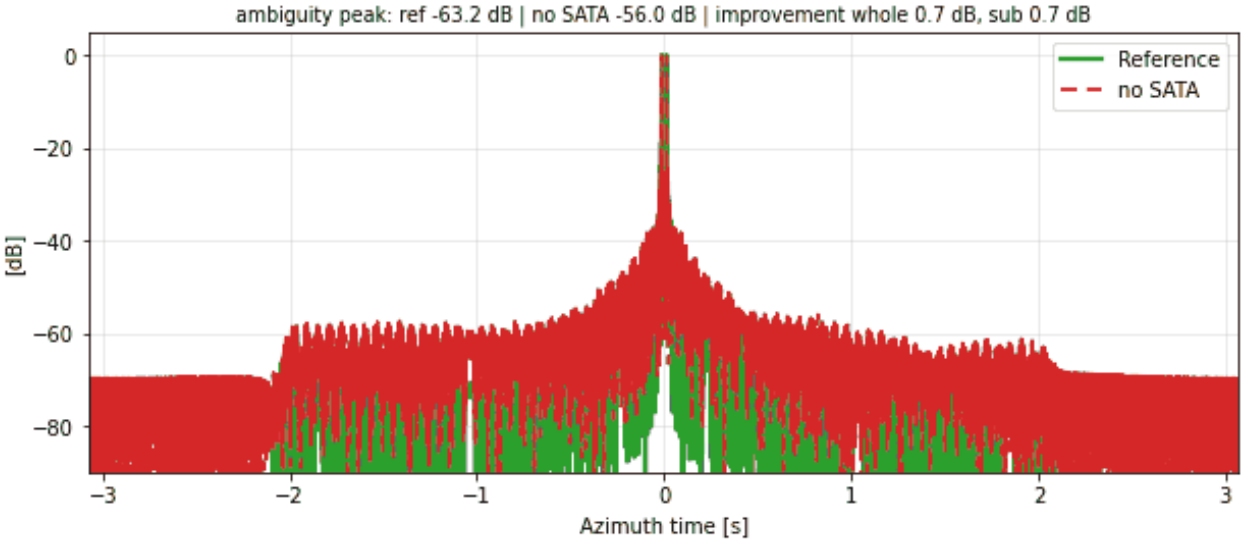



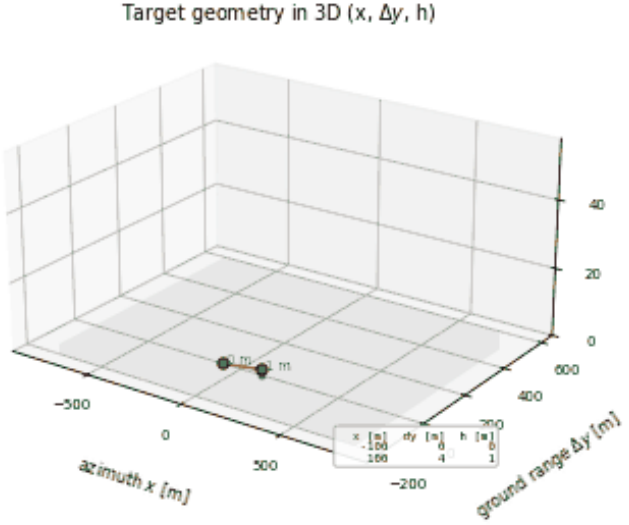



RA-SS-006 | SATA 1D | along-track ramp: N = 2, $\alpha = 4°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

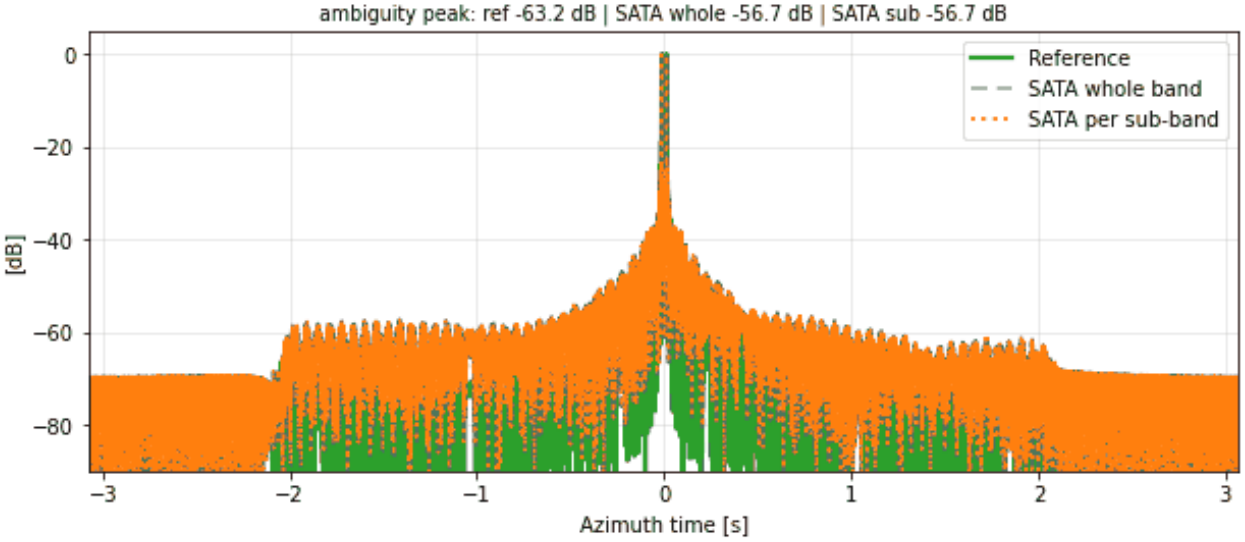

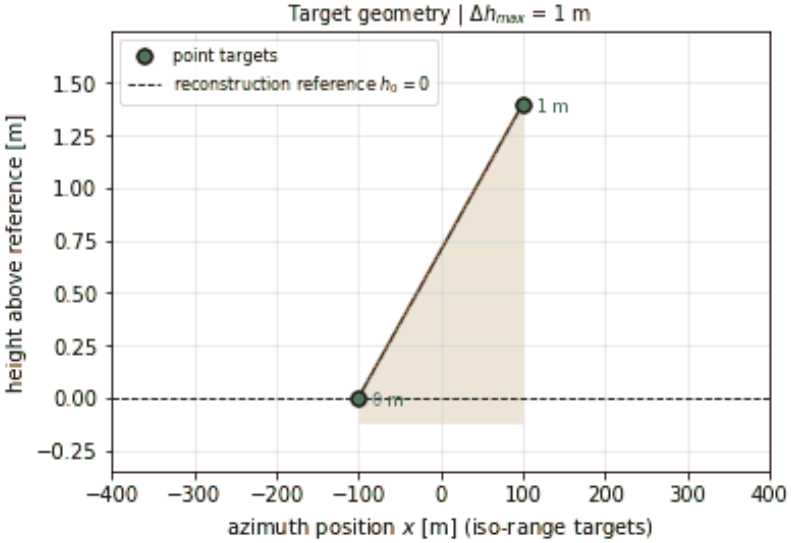



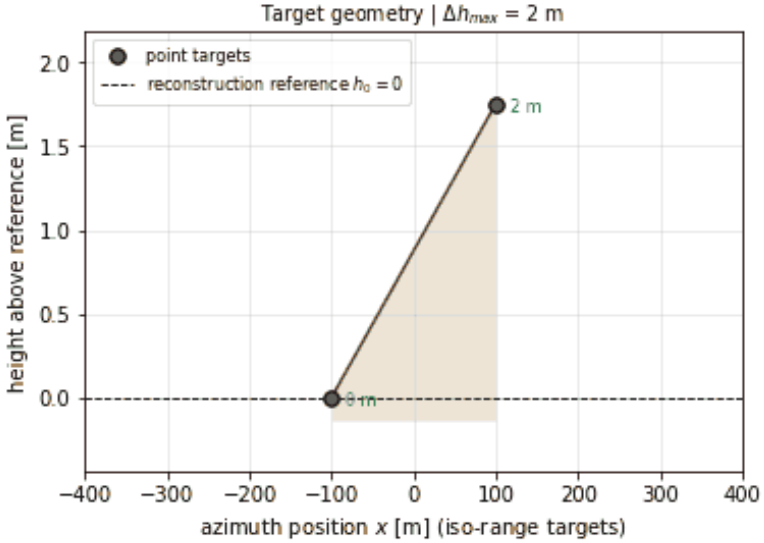



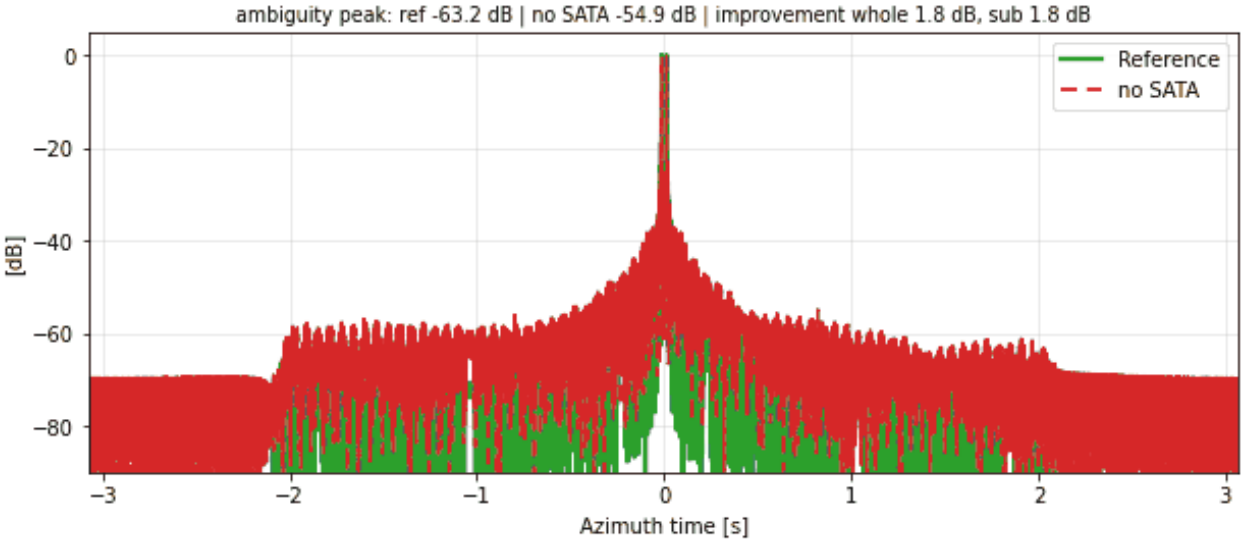



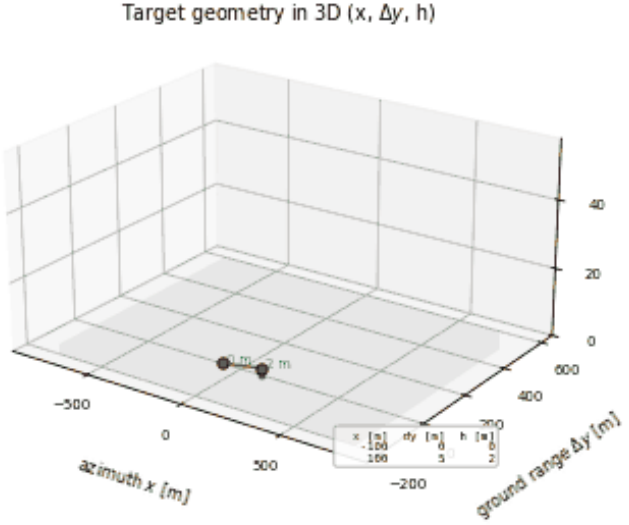
RA-SS-007 | SATA 1D | along-track ramp: N = 2, $\alpha = 5°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

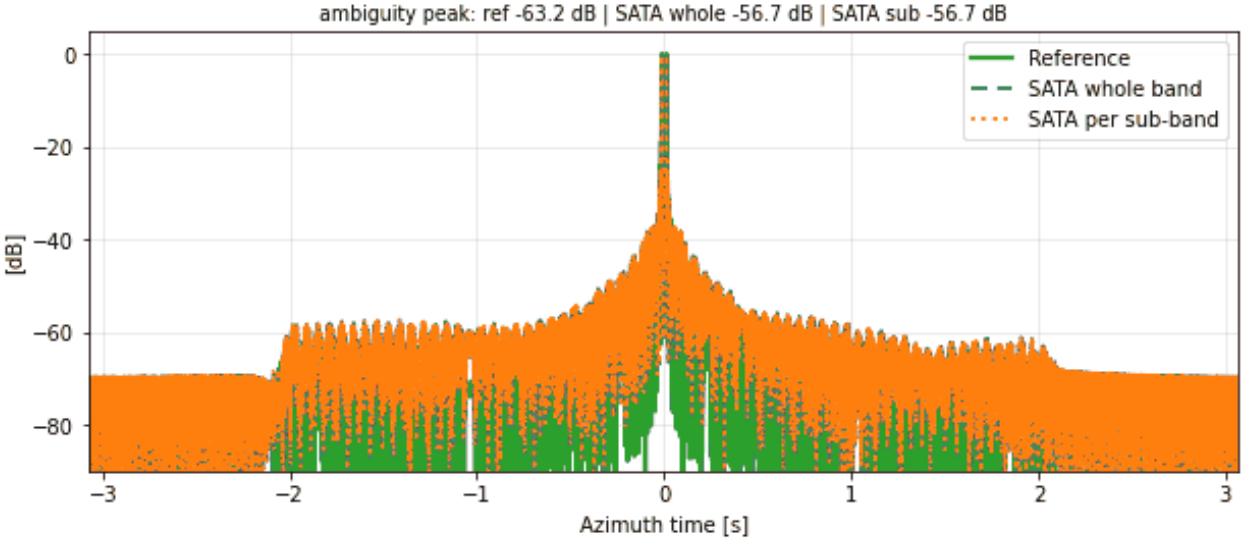





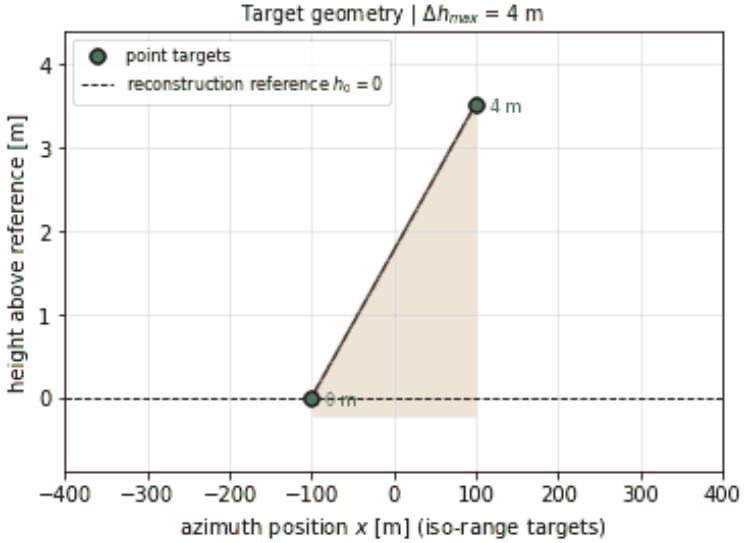



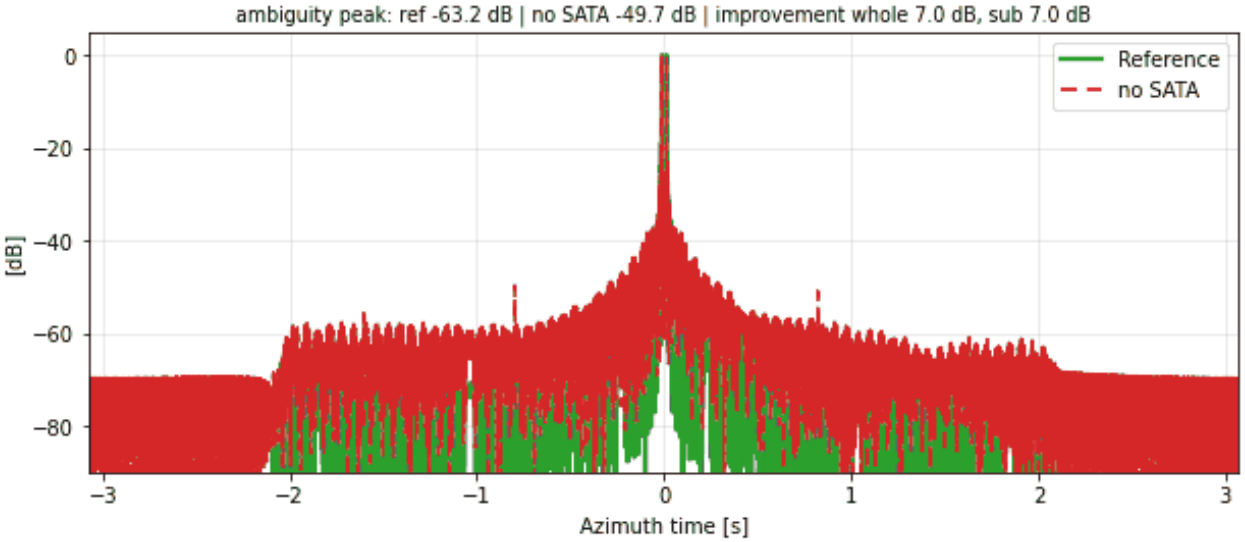



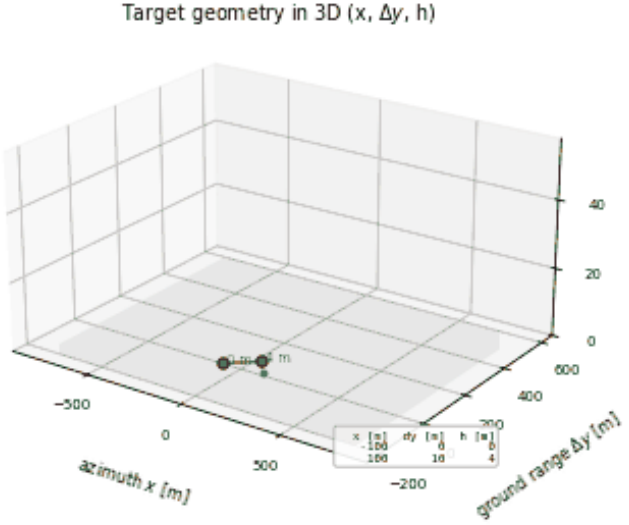
RA-SS-008 | SATA 1D | along-track ramp: N = 2, $\alpha = 10°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

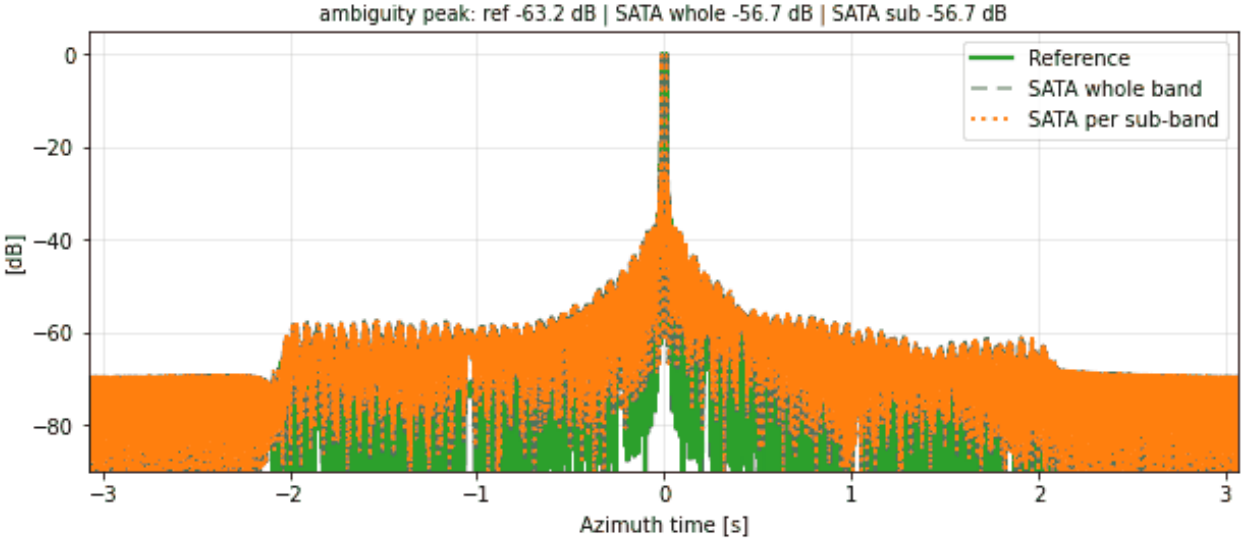





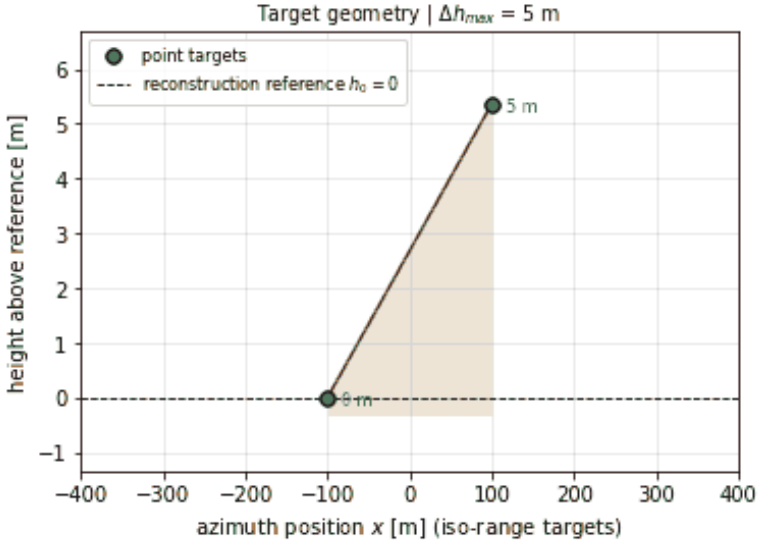



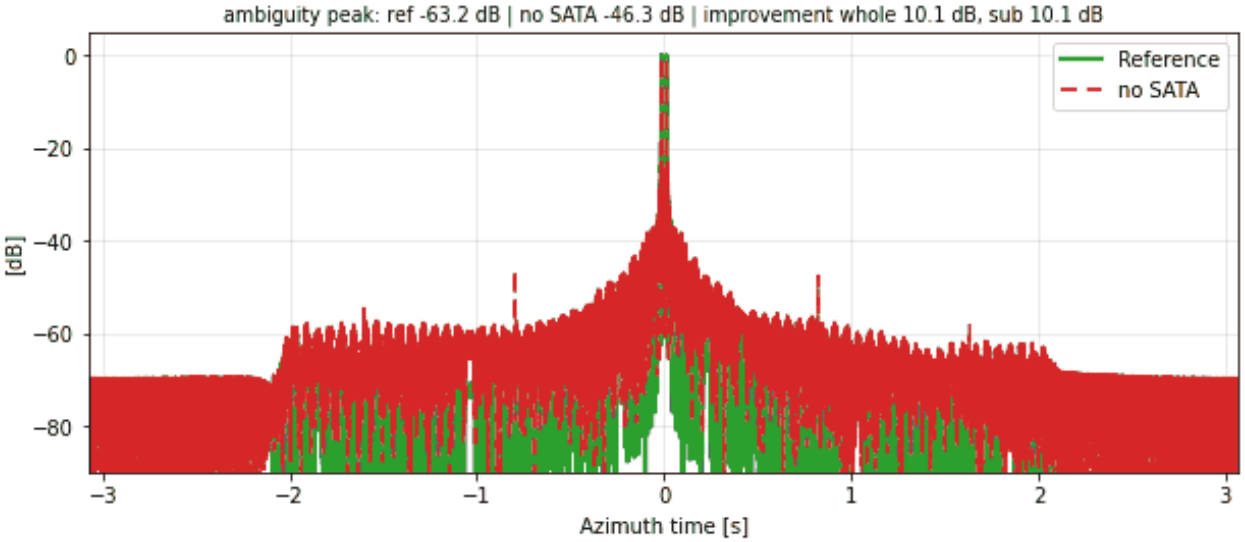



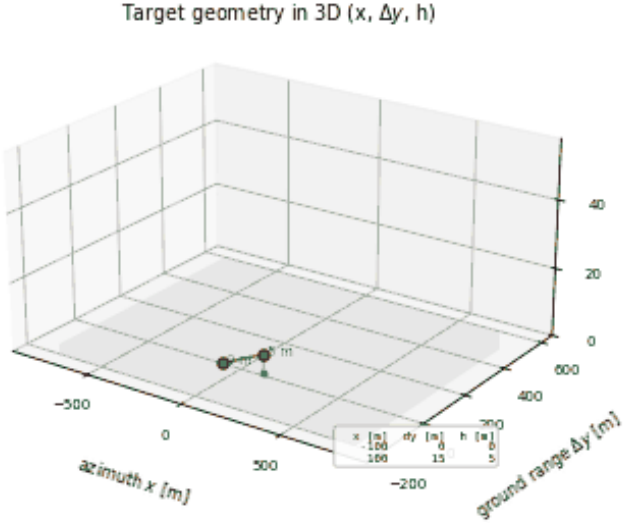
RA-SS-009 | SATA 1D | along-track ramp: N = 2, $\alpha = 15°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

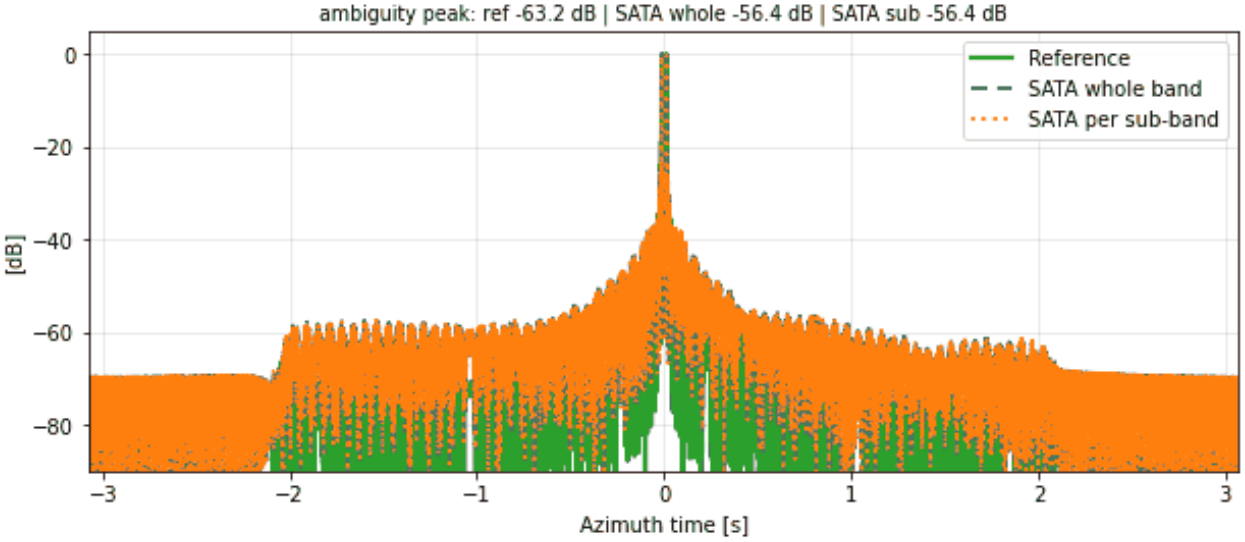





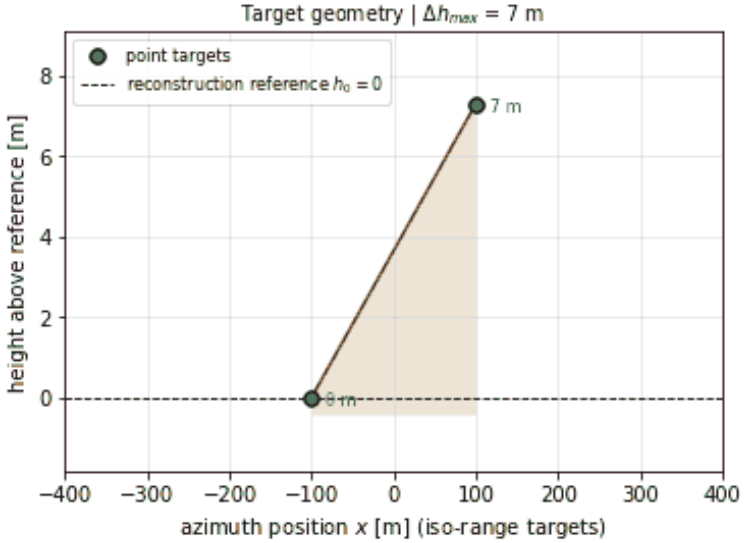



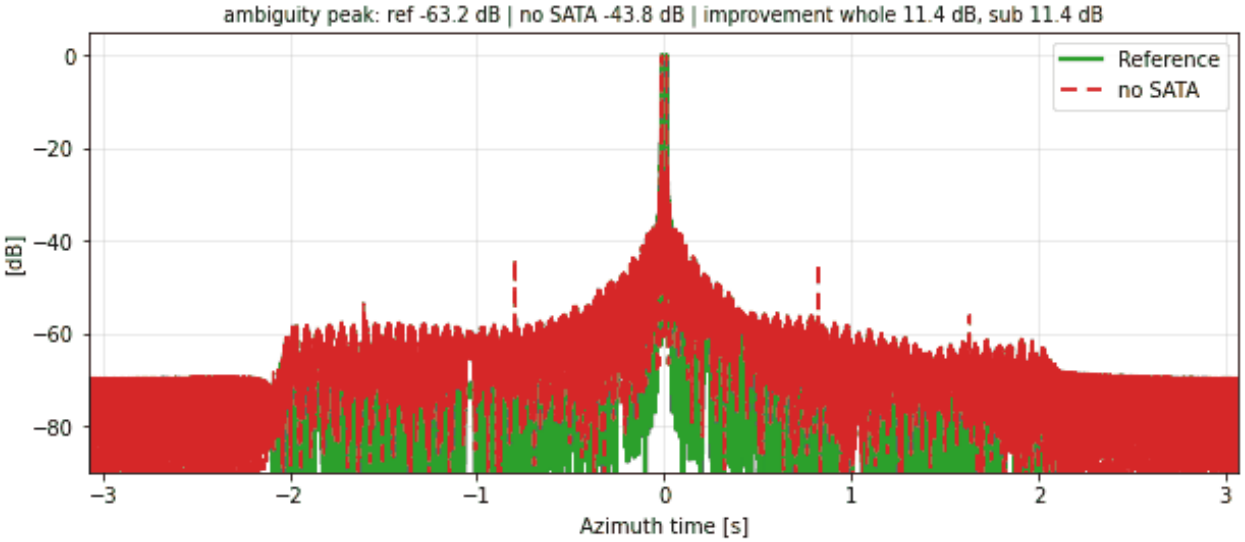



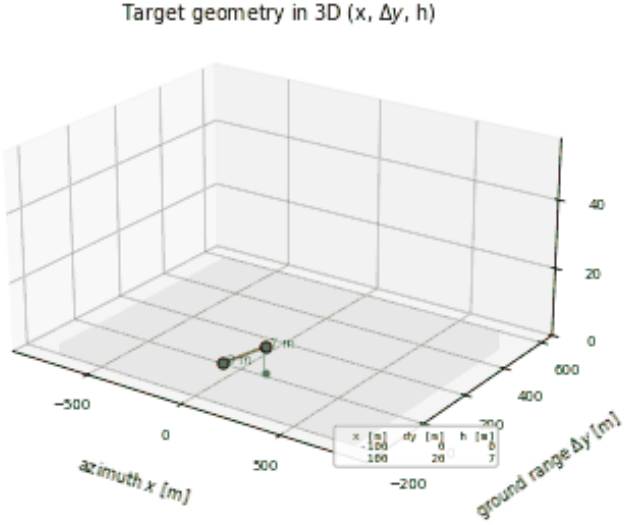
RA-SS-010 | SATA 1D | along-track ramp: N = 2, $\alpha = 20°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

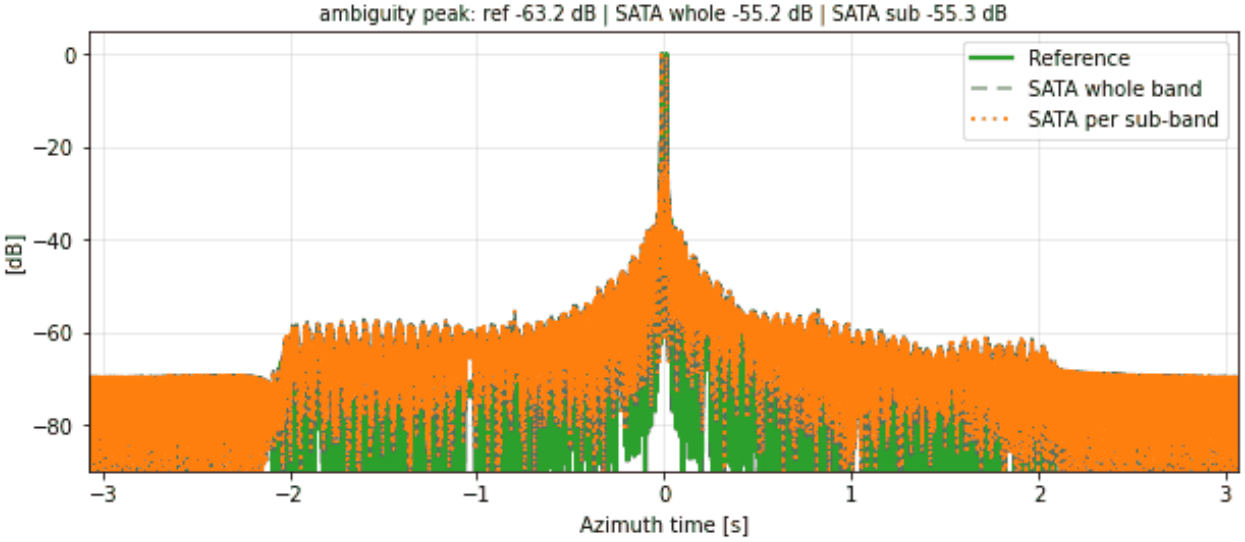





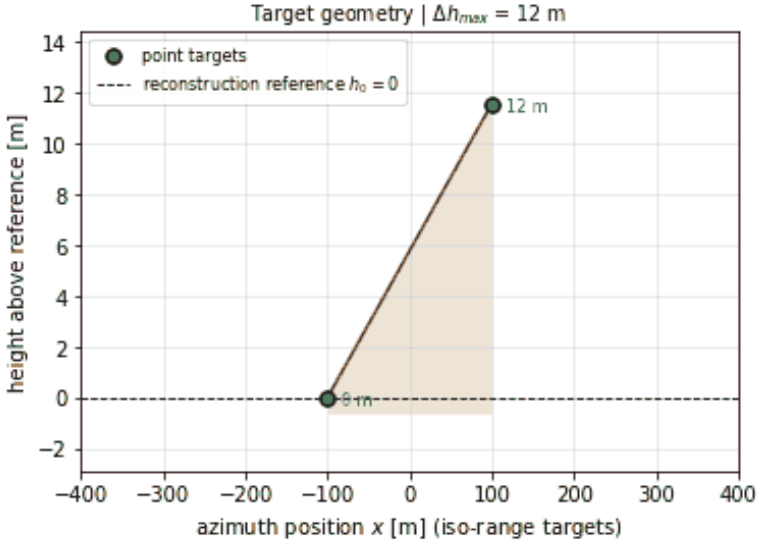



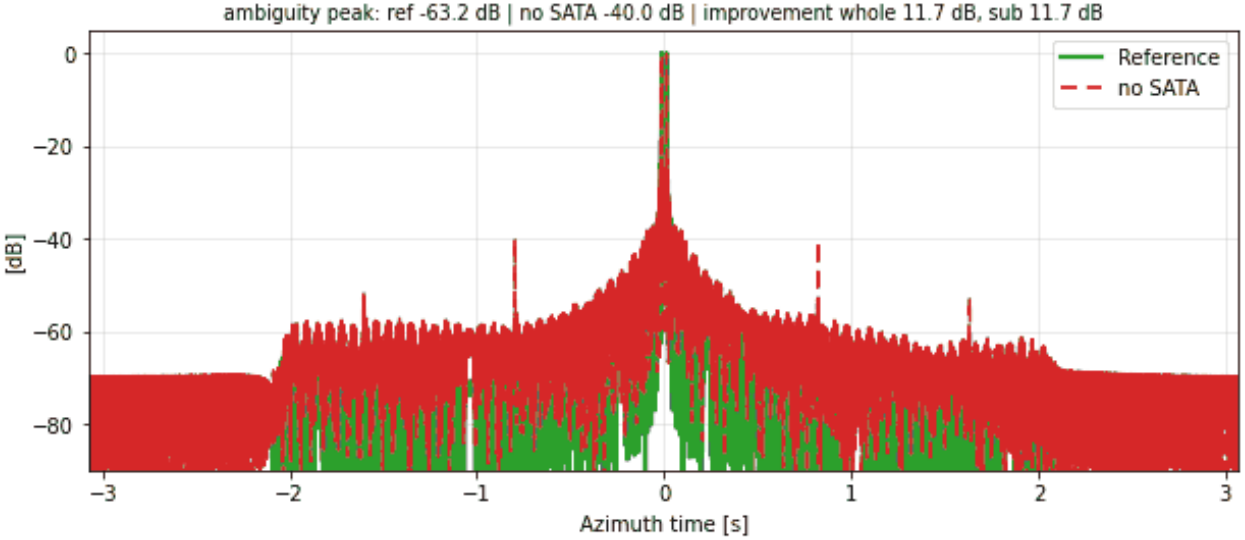



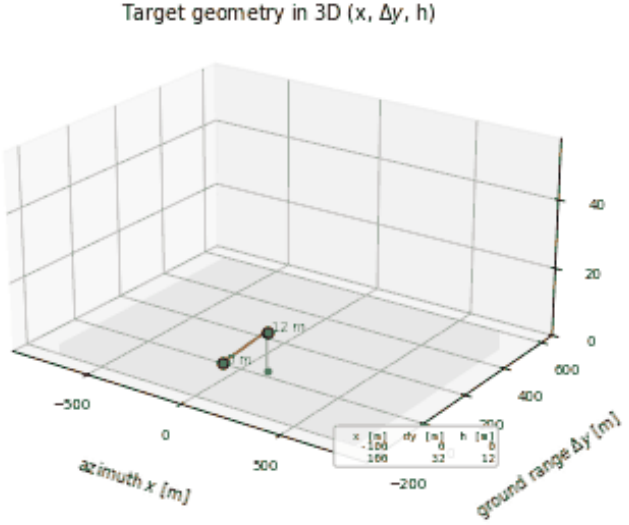
RA-SS-011 | SATA 1D | along-track ramp: N = 2, $\alpha = 30°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

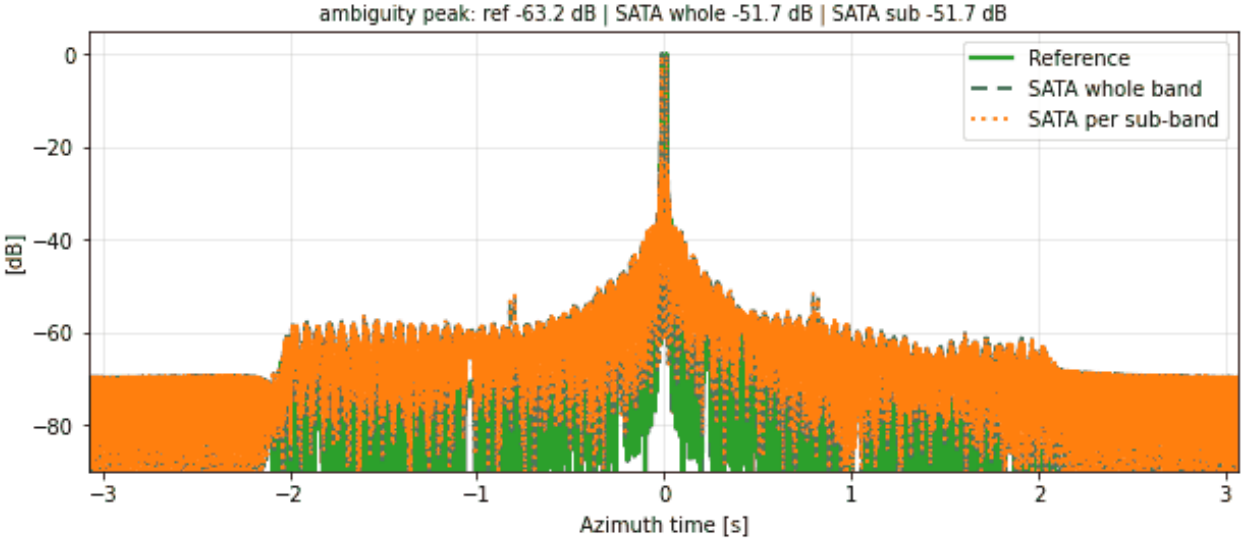





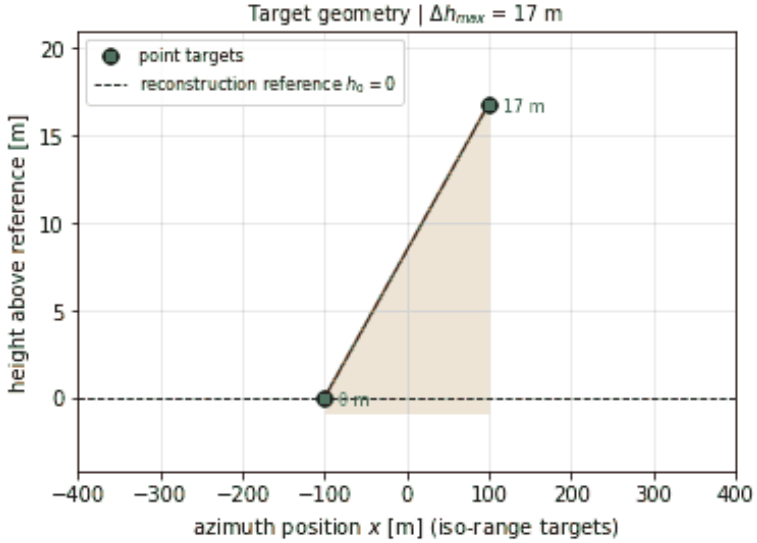



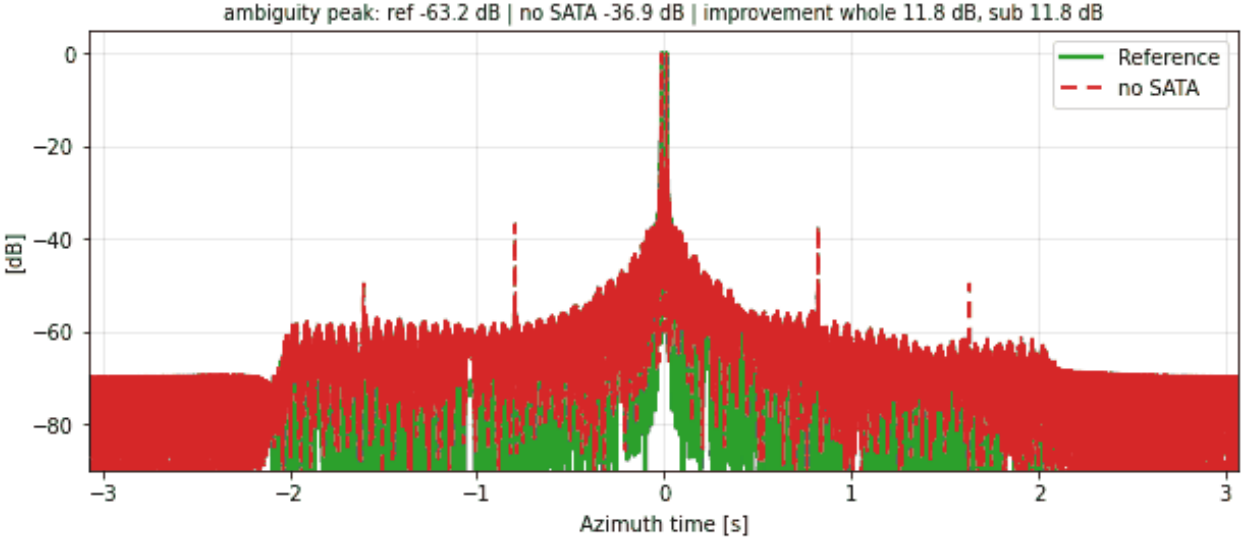



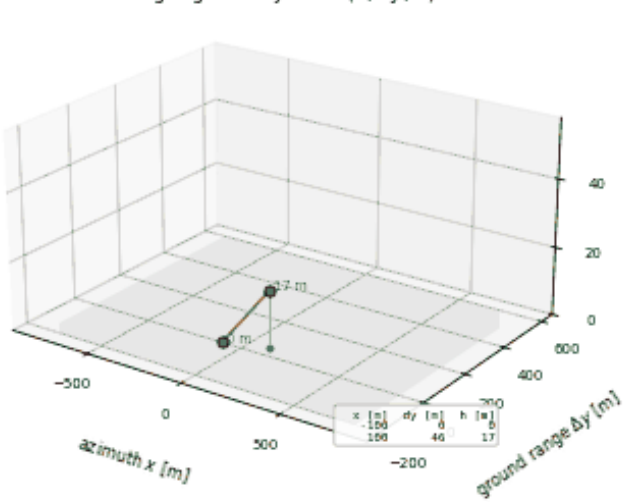
RA-SS-012 | SATA 1D | along-track ramp: N = 2, $\alpha = 40°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

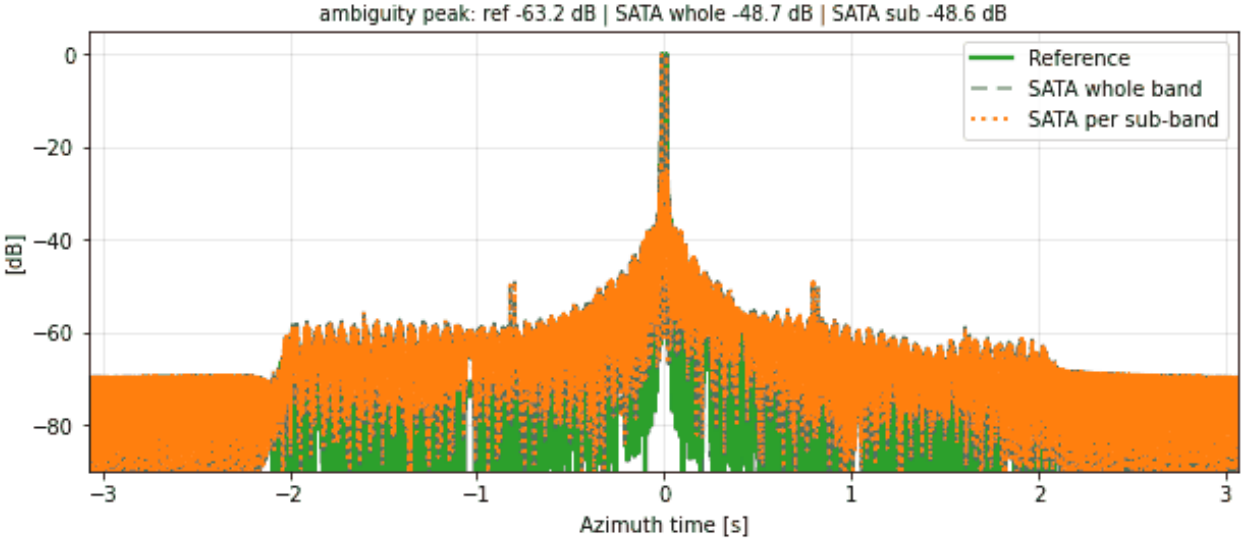





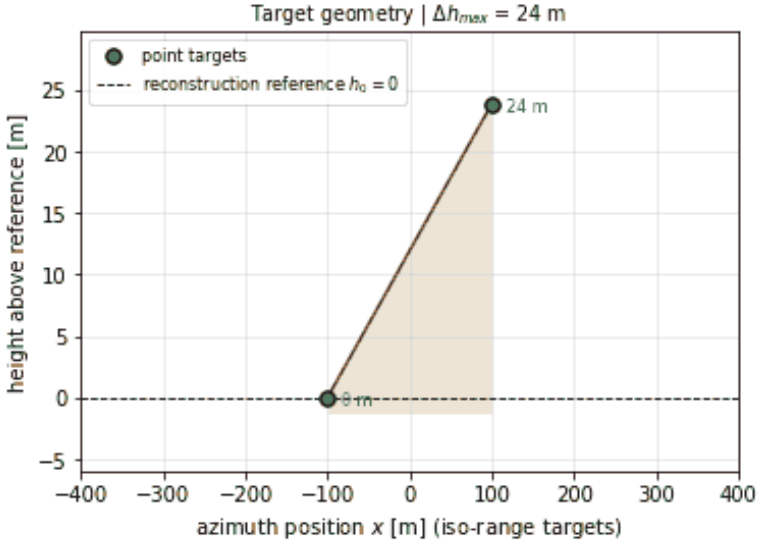



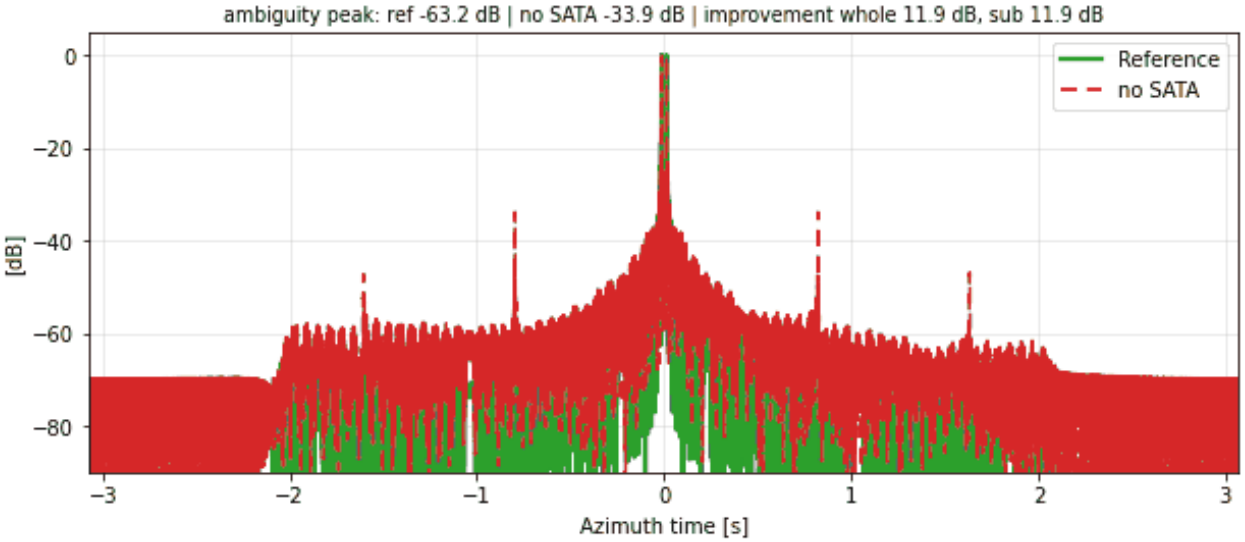



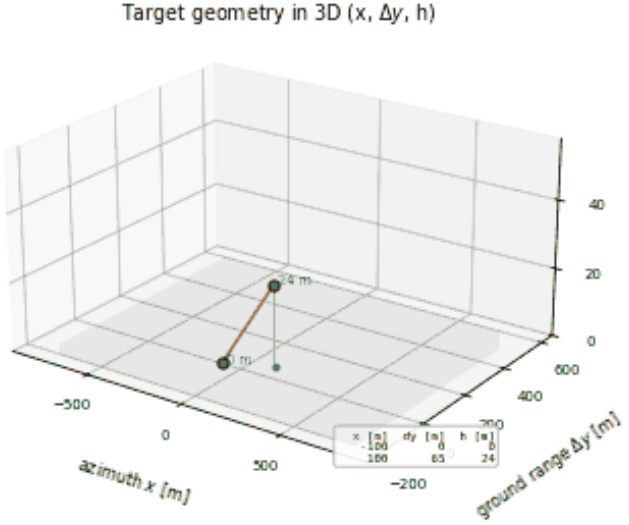
RA-SS-013 | SATA 1D | along-track ramp: N = 2, $\alpha = 50°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

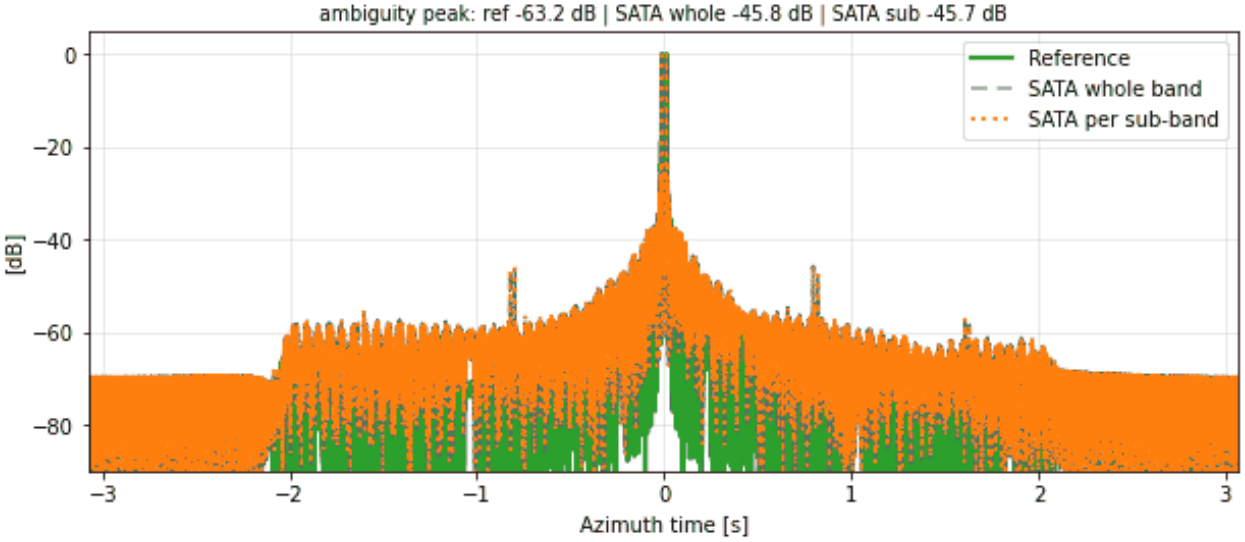





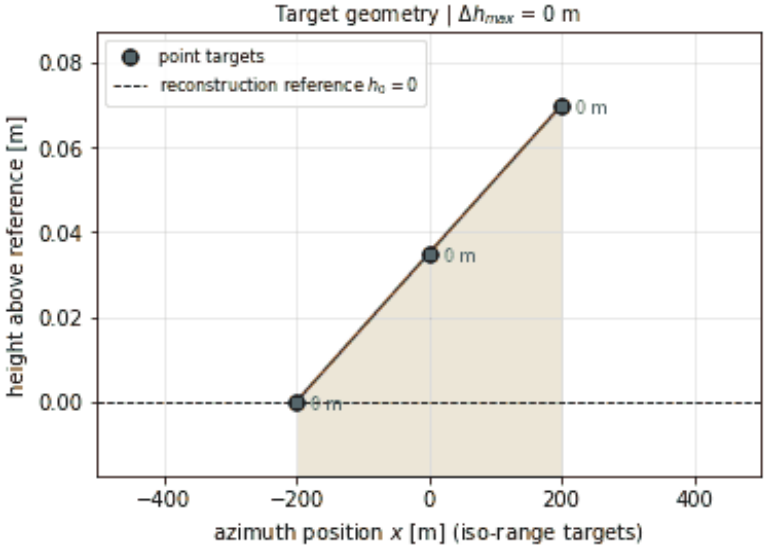



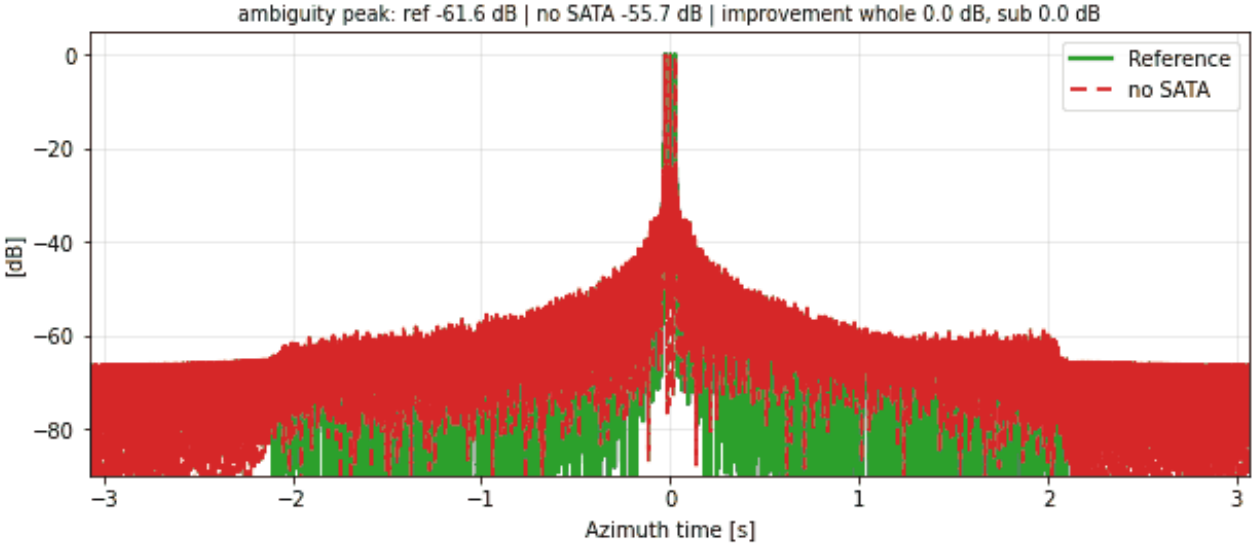



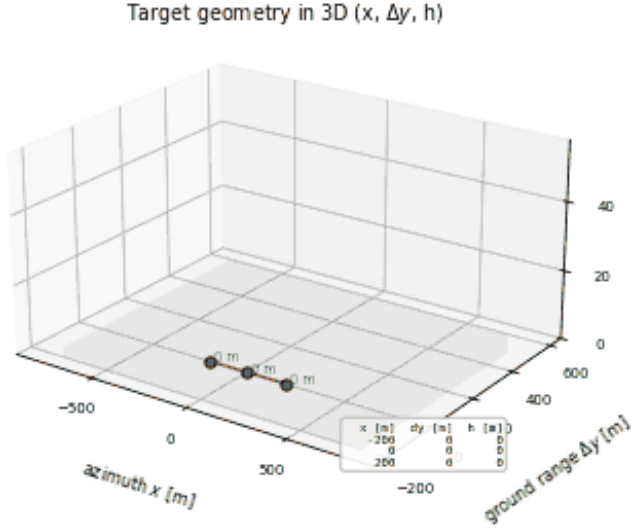
RA-SS-014 | SATA 1D | along-track ramp: N = 3, $\alpha = 0.1°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

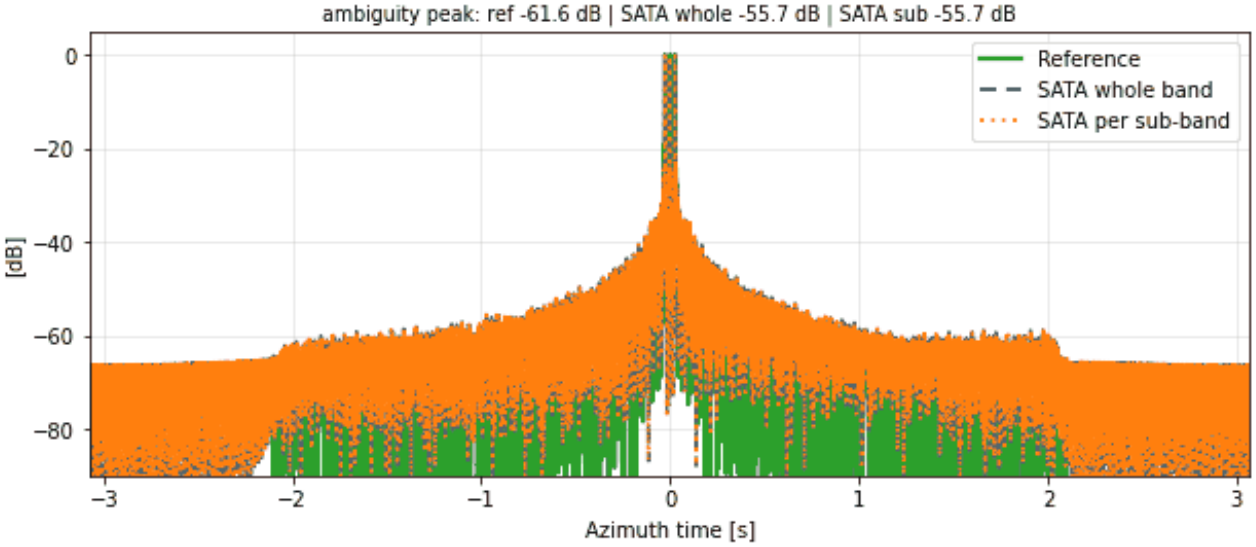





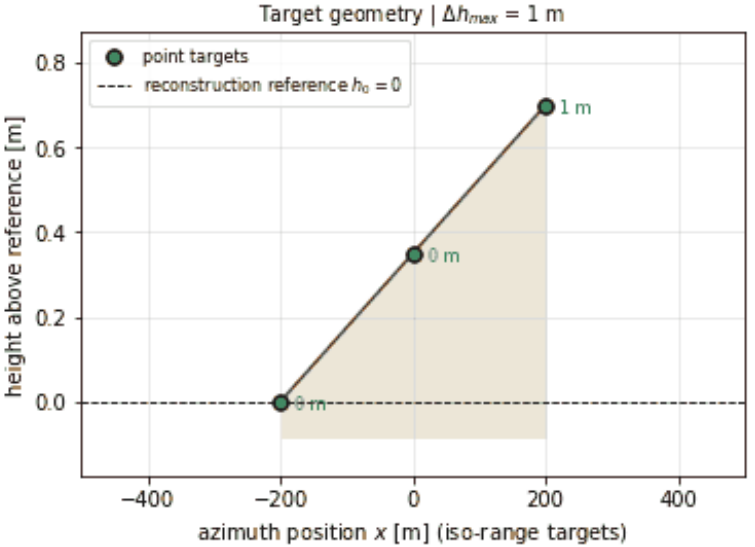



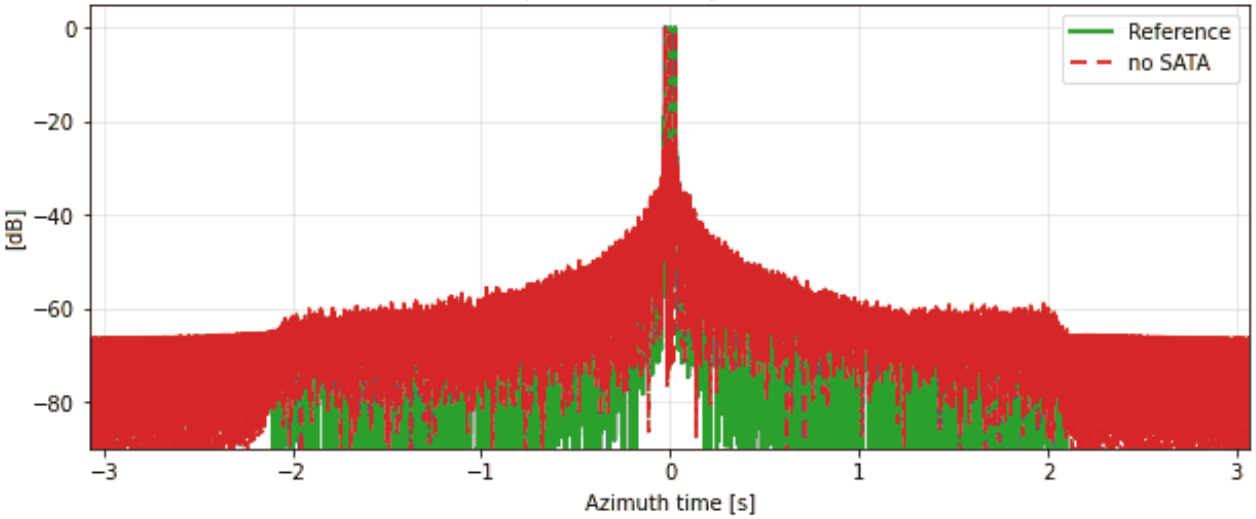



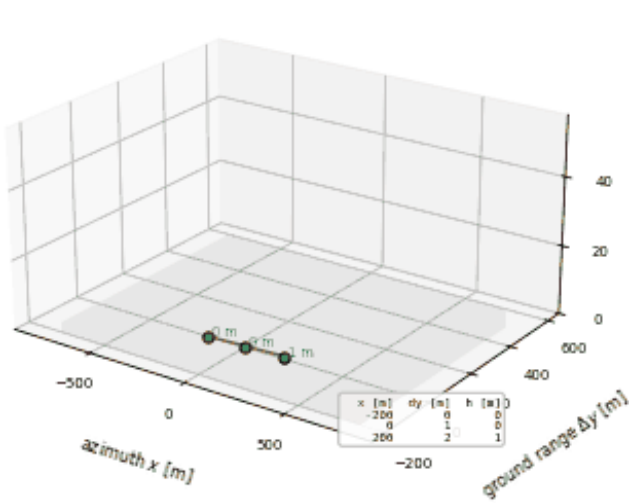
RA-SS-015 | SATA 1D | along-track ramp: N = 3, $\alpha = 1°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

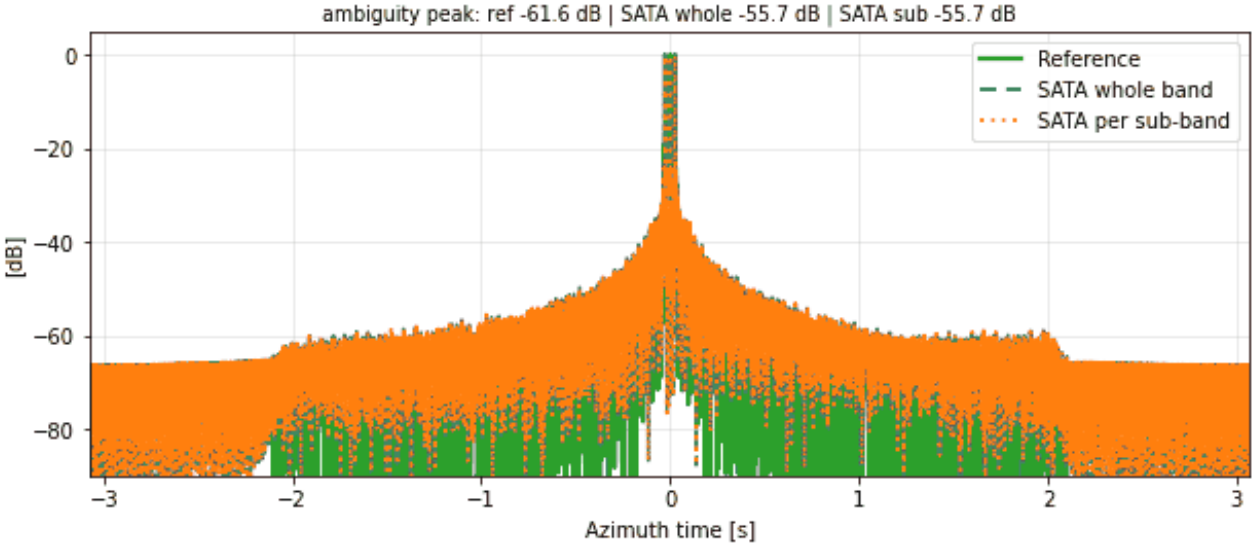





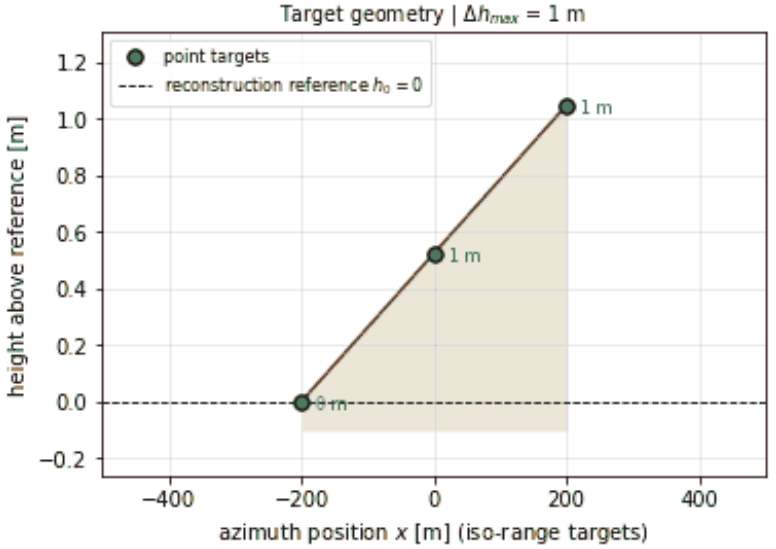



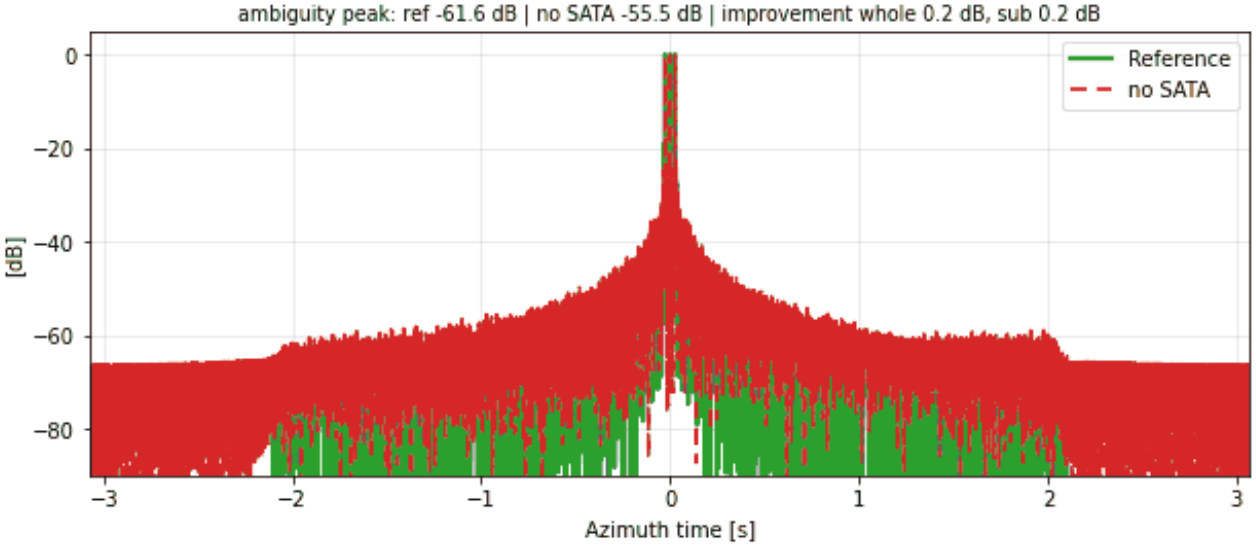



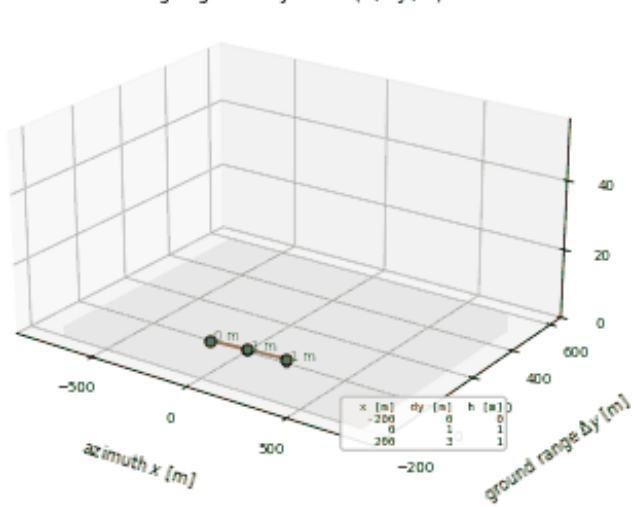
RA-SS-016 | SATA 1D | along-track ramp: N = 3, $\alpha = 1.5°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

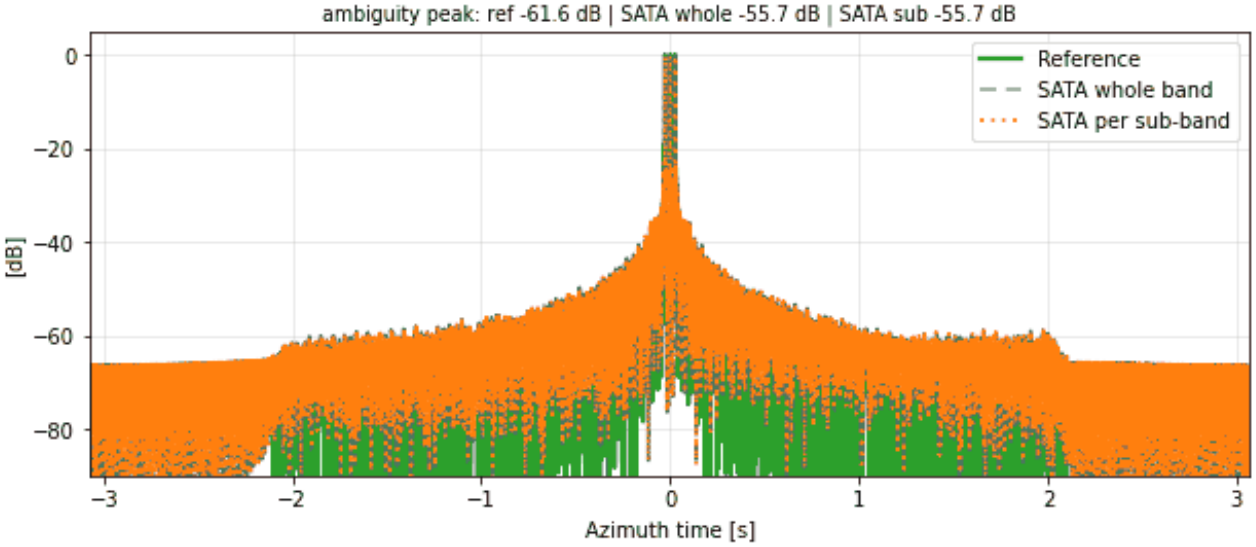





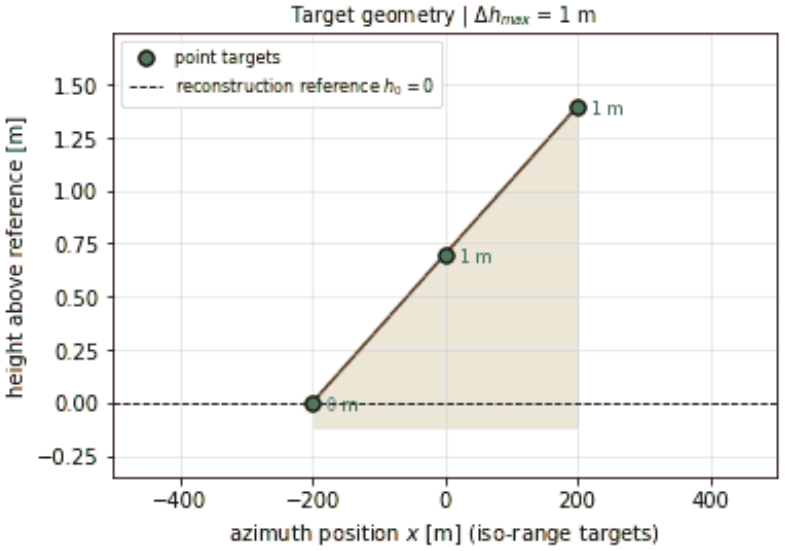



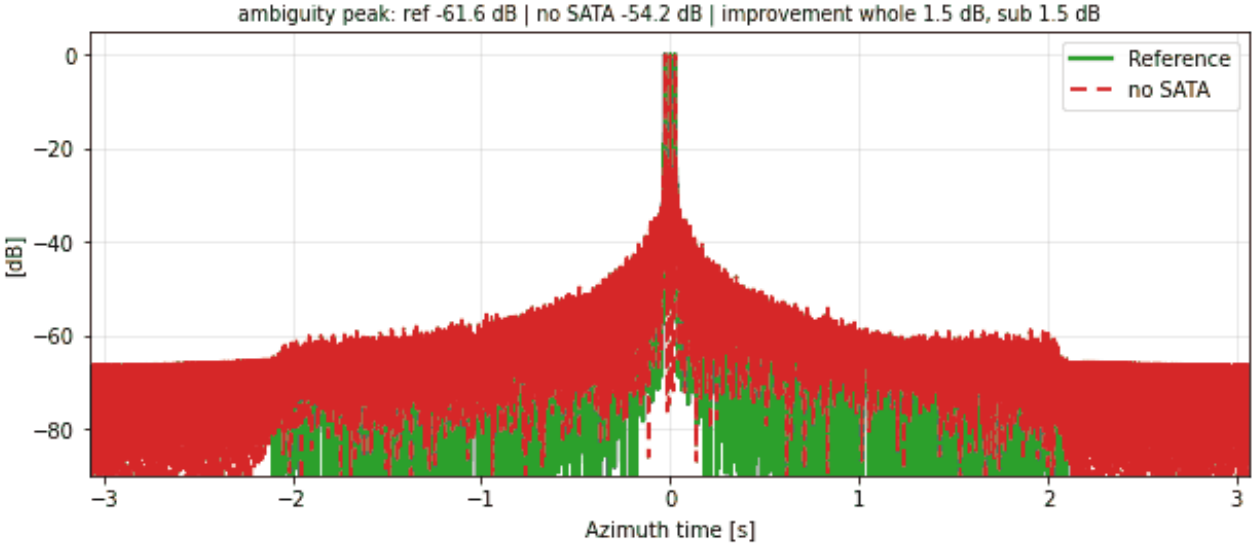



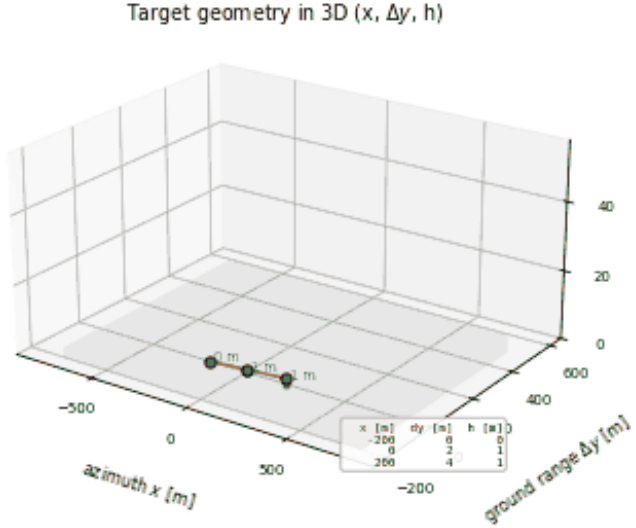
RA-SS-017 | SATA 1D | along-track ramp: N = 3, $\alpha = 2°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

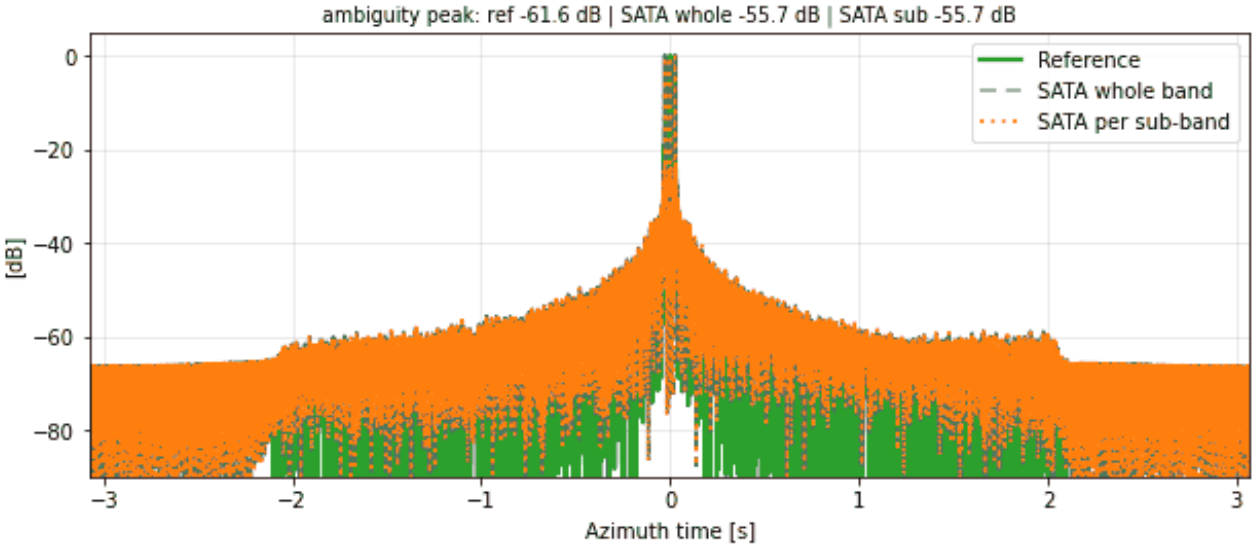





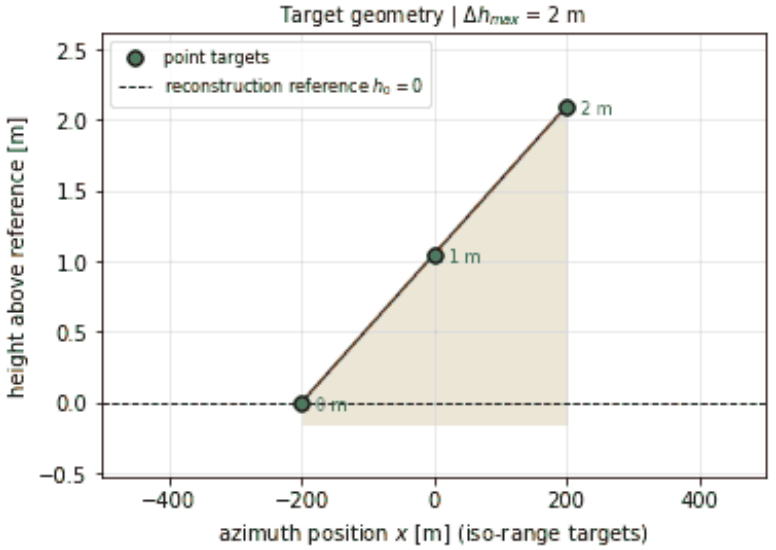



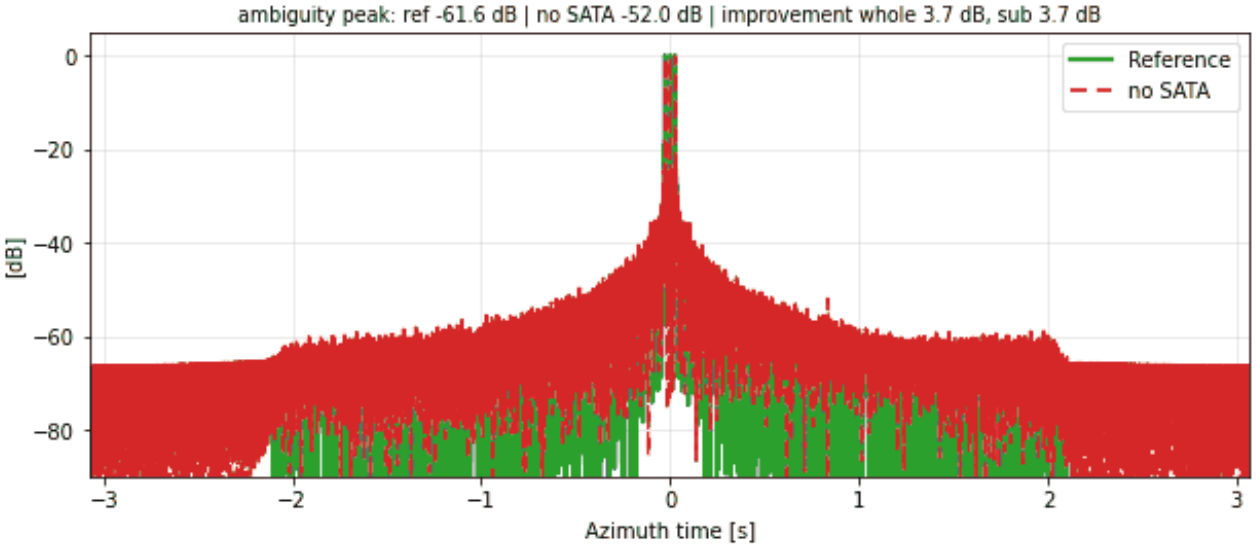



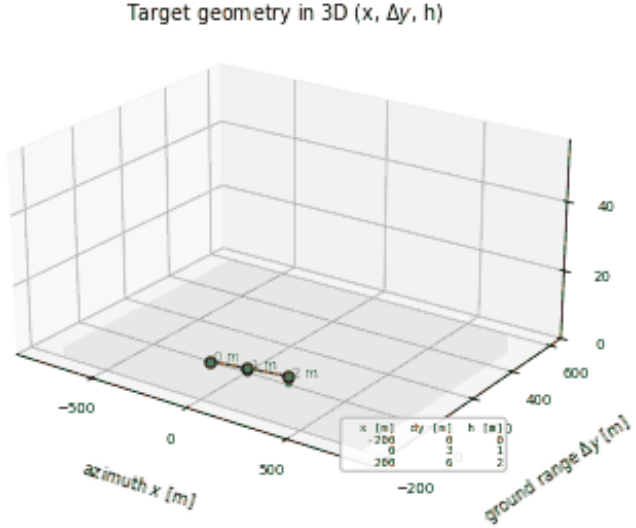
RA-SS-018 | SATA 1D | along-track ramp: N = 3, $\alpha = 3°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

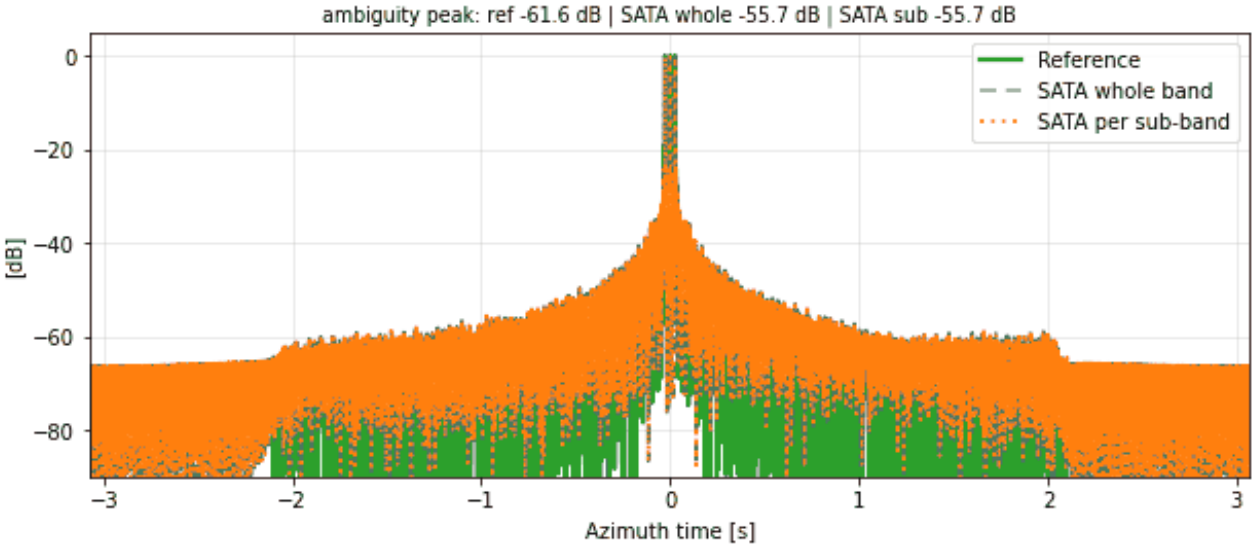






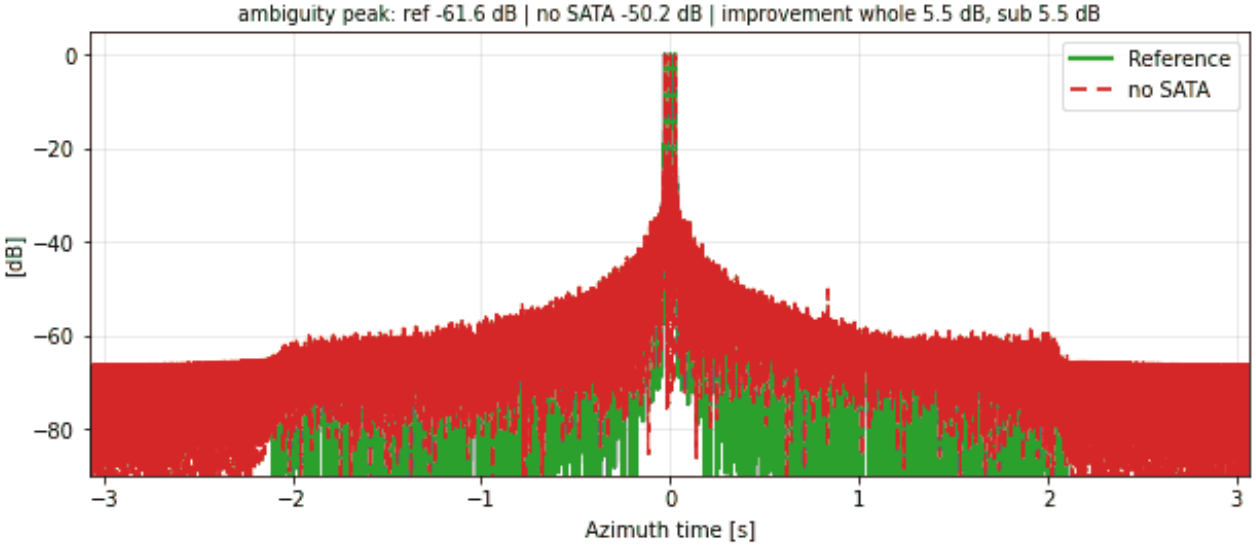



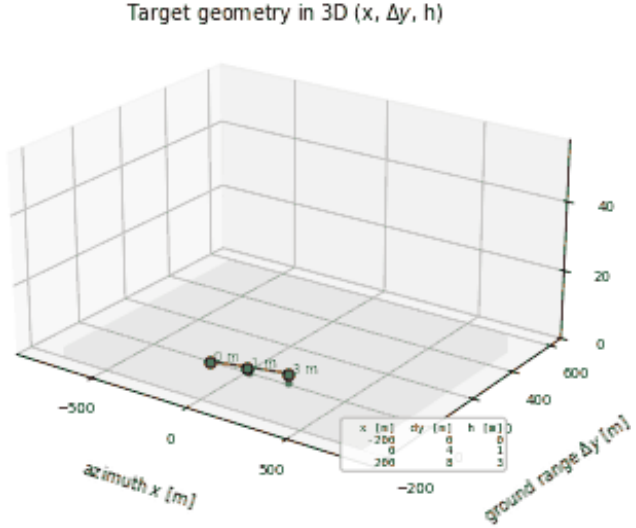



RA-SS-019 | SATA 1D | along-track ramp: N = 3, $\alpha = 4°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

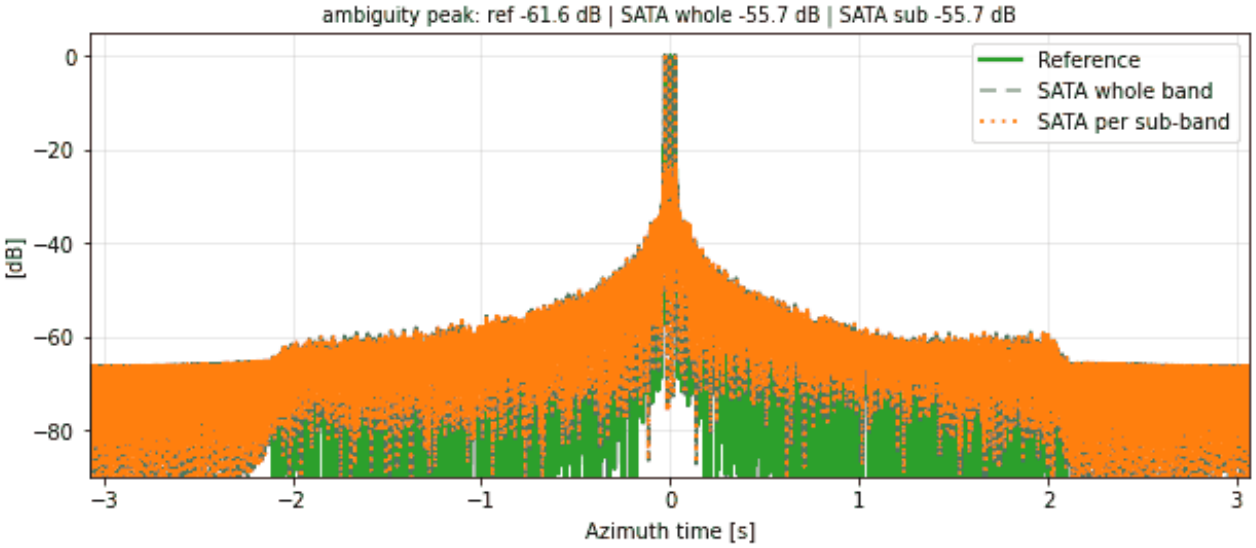

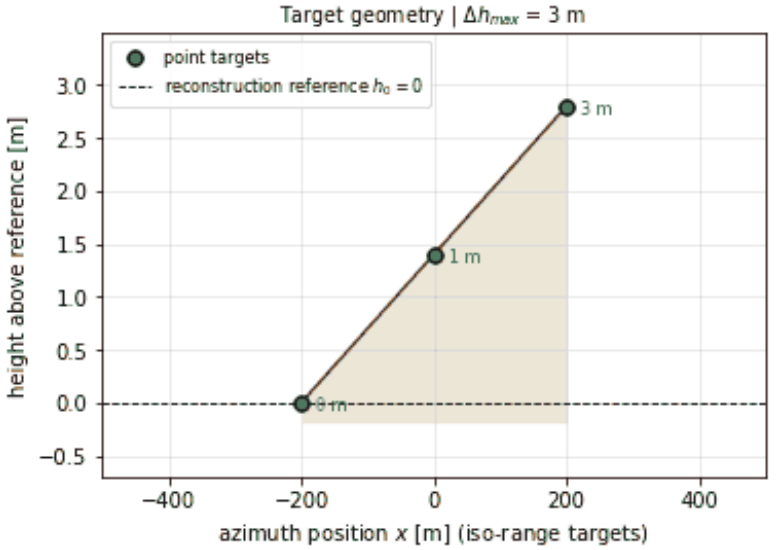



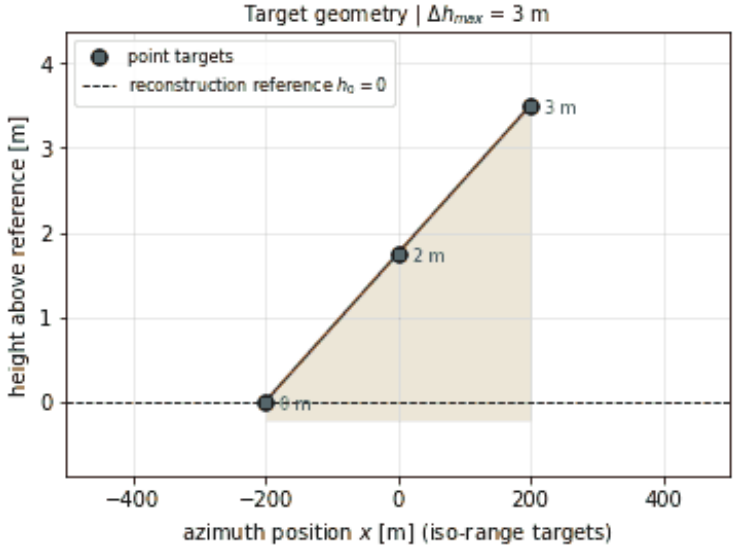



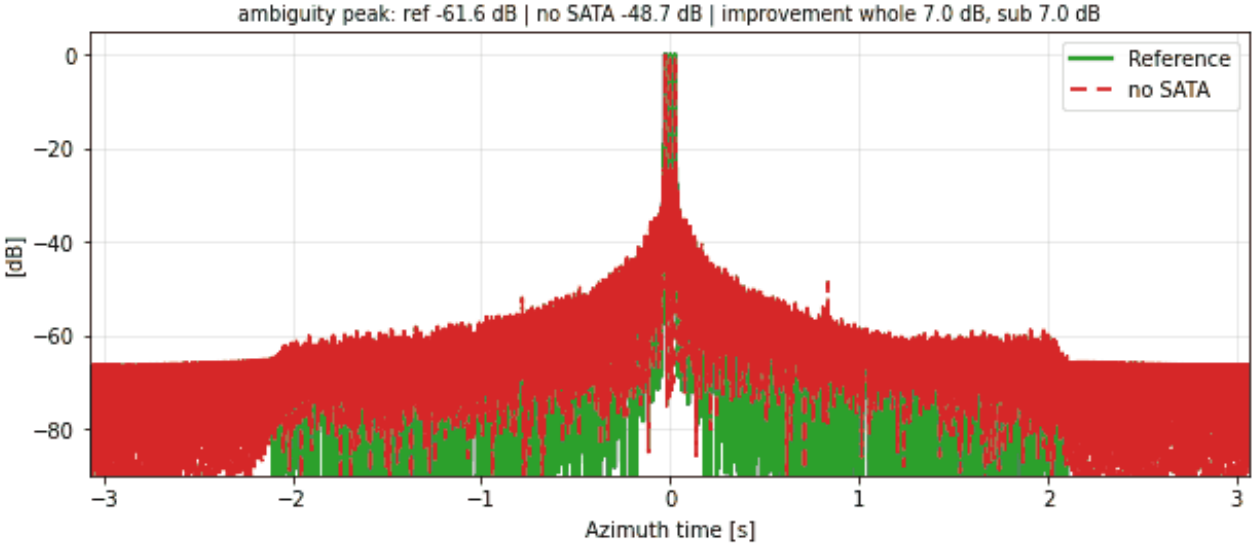



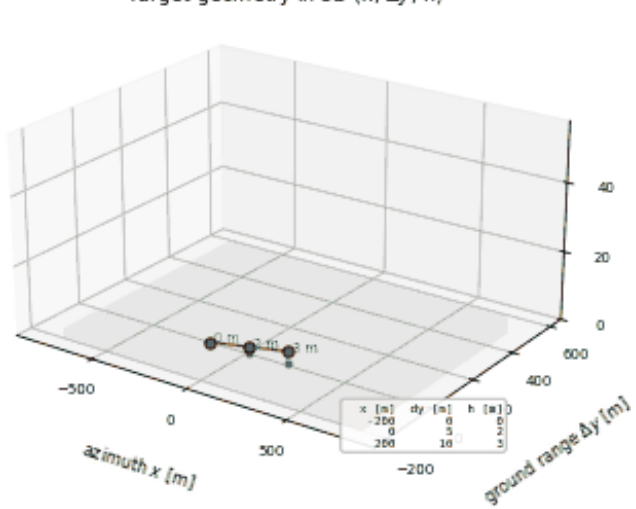
RA-SS-020 | SATA 1D | along-track ramp: N = 3, $\alpha = 5°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

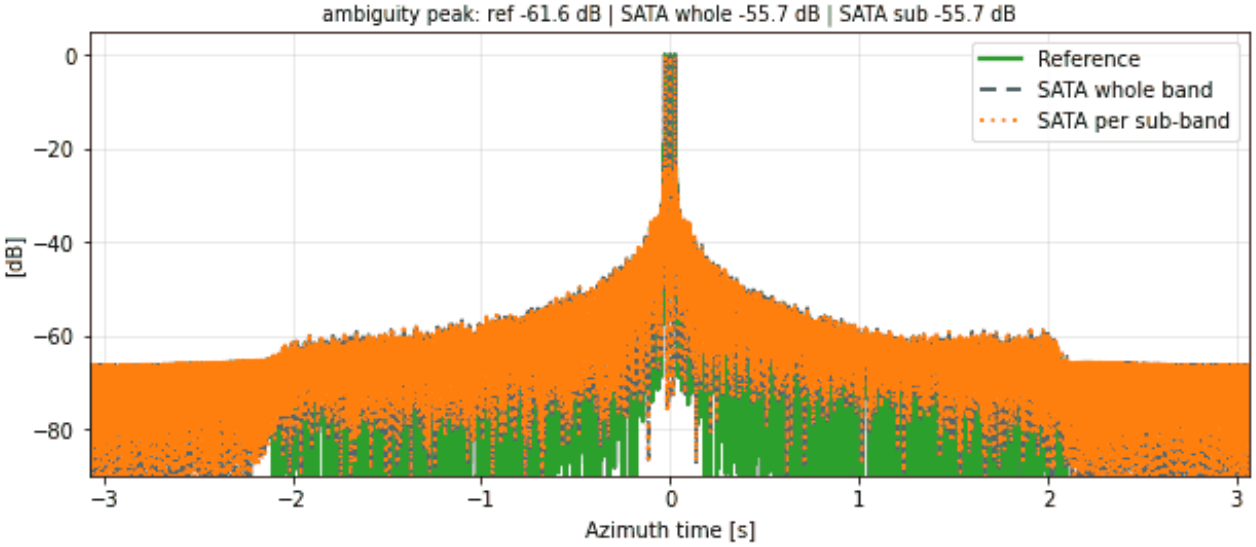





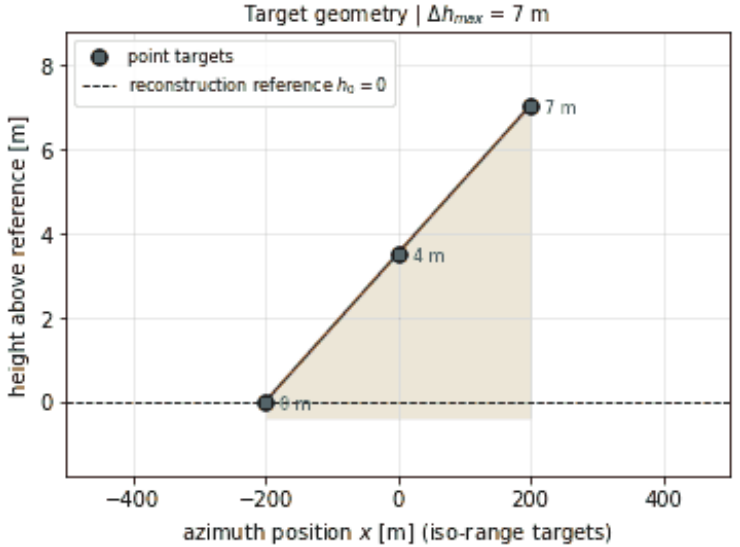



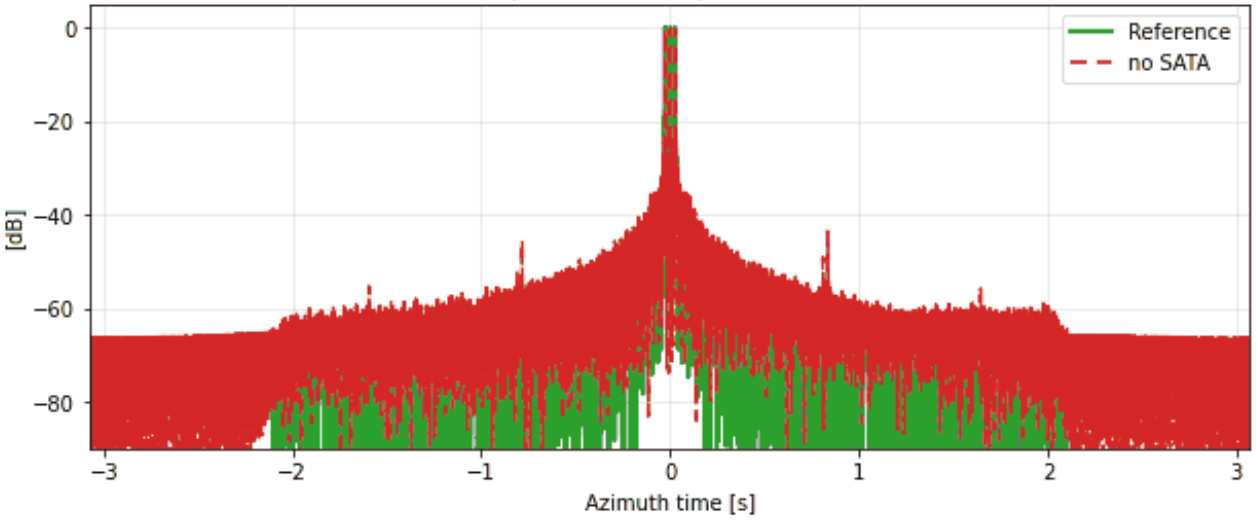



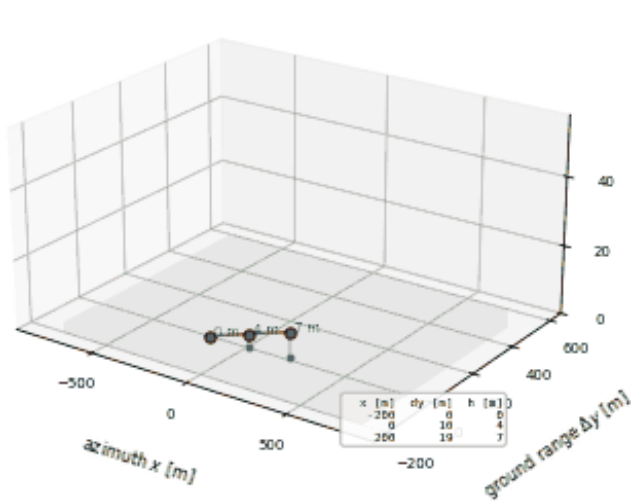
RA-SS-021 | SATA 1D | along-track ramp: N = 3, $\alpha = 10^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

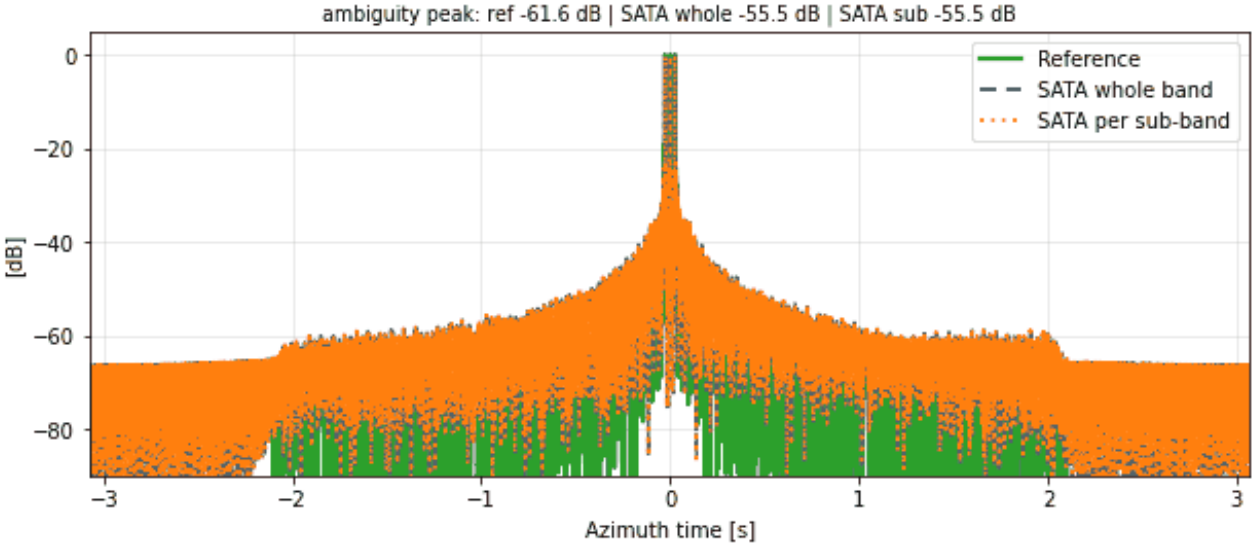





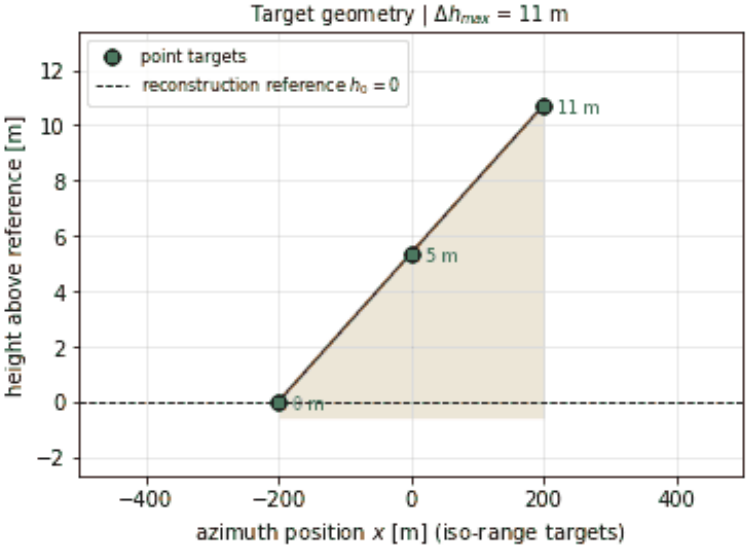



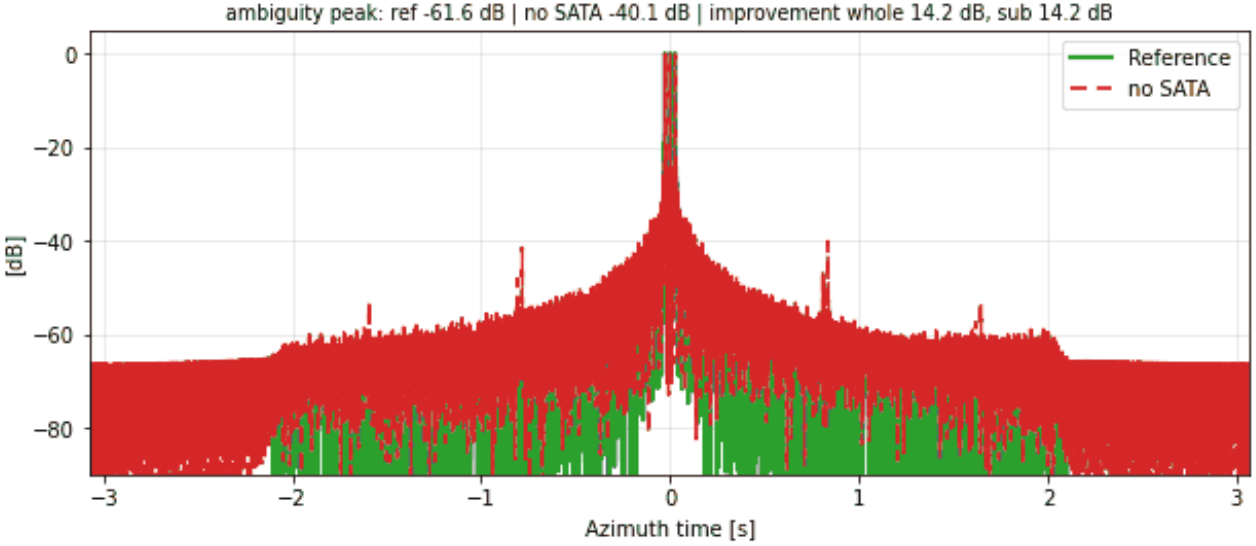



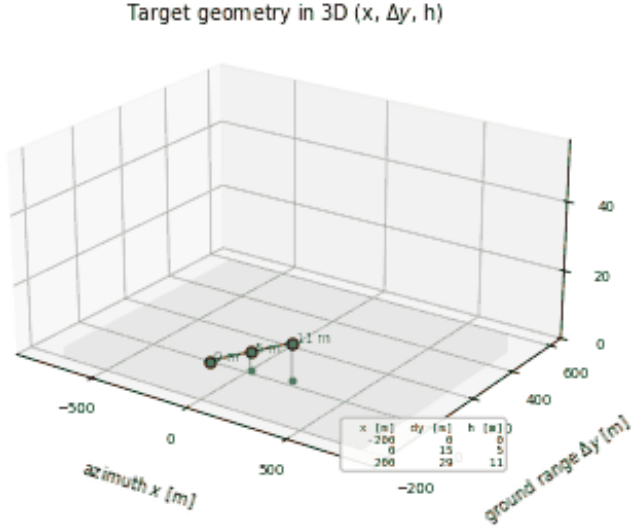
RA-SS-022 | SATA 1D | along-track ramp: N = 3, $\alpha = 15^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

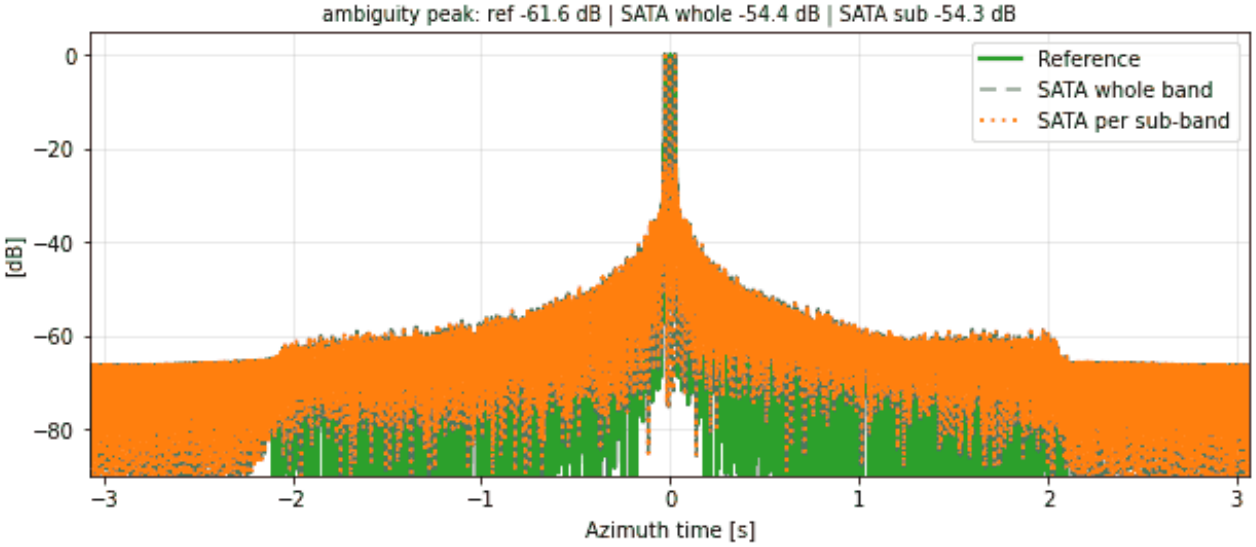





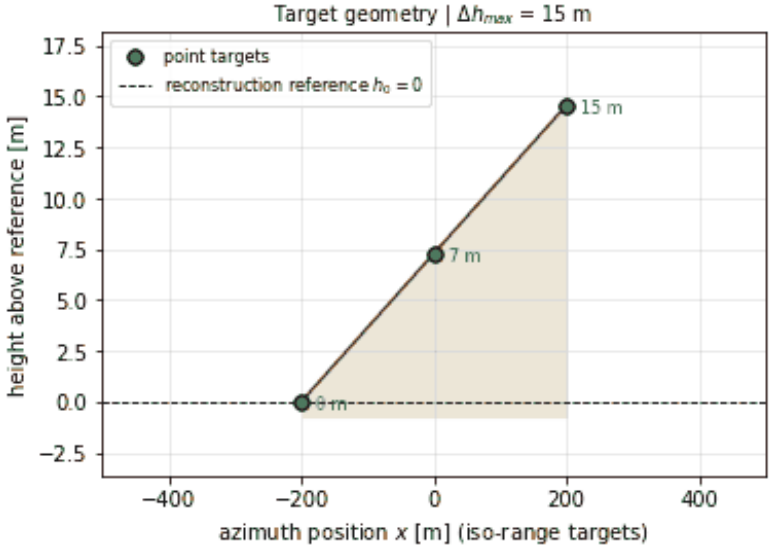



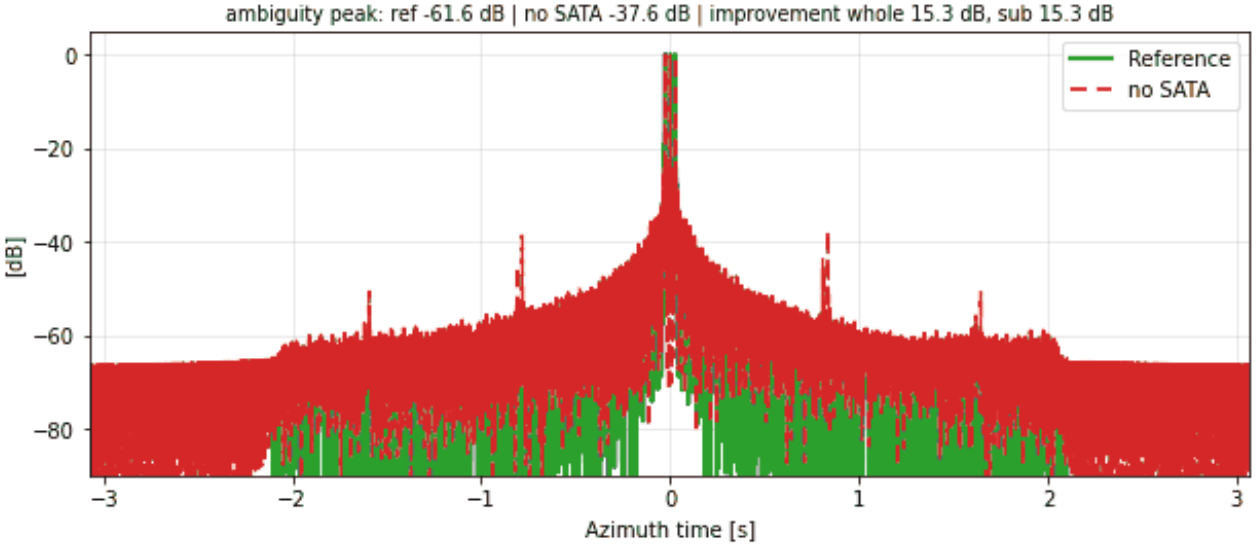



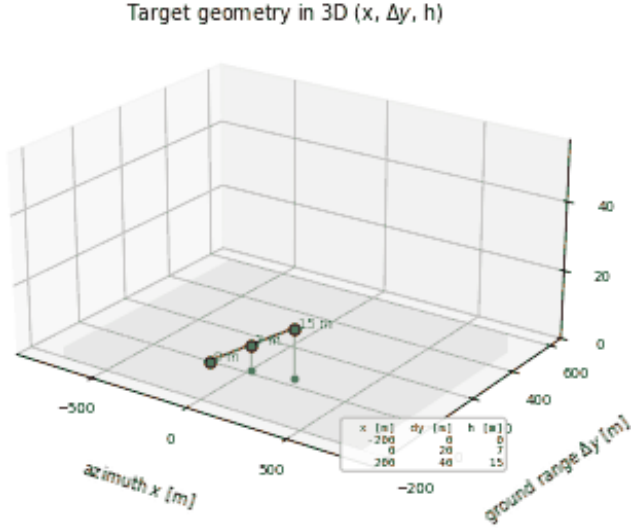
RA-SS-023 | SATA 1D | along-track ramp: N = 3, $\alpha = 20°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

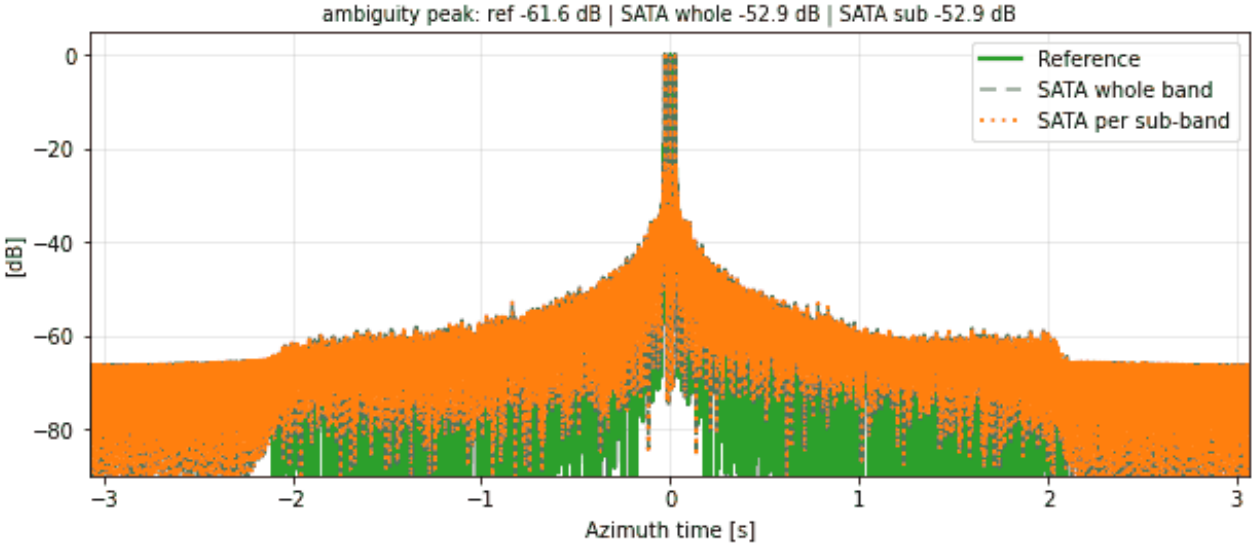





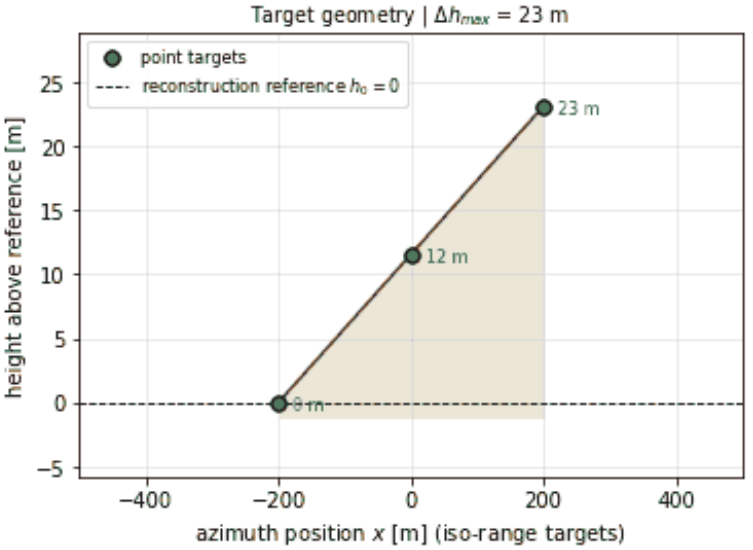



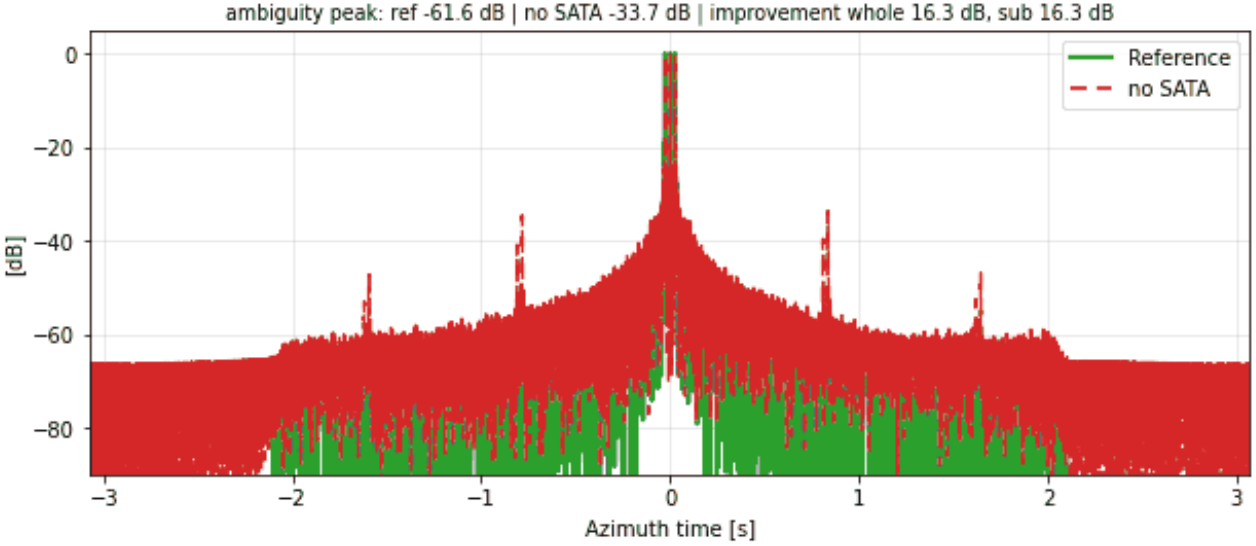



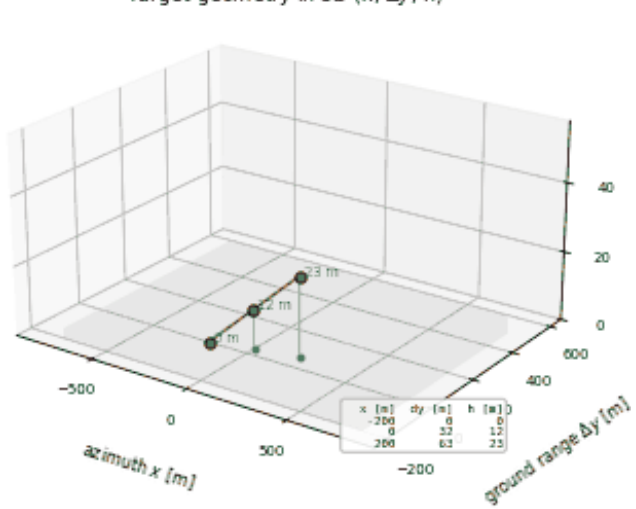
RA-SS-024 | SATA 1D | along-track ramp: N = 3, $\alpha = 30^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

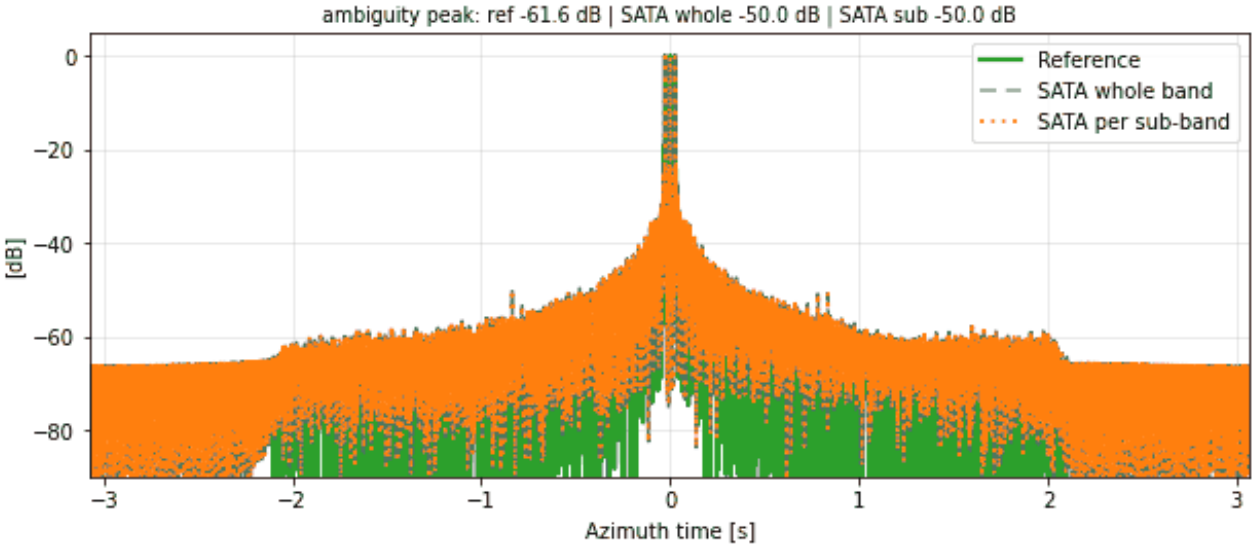





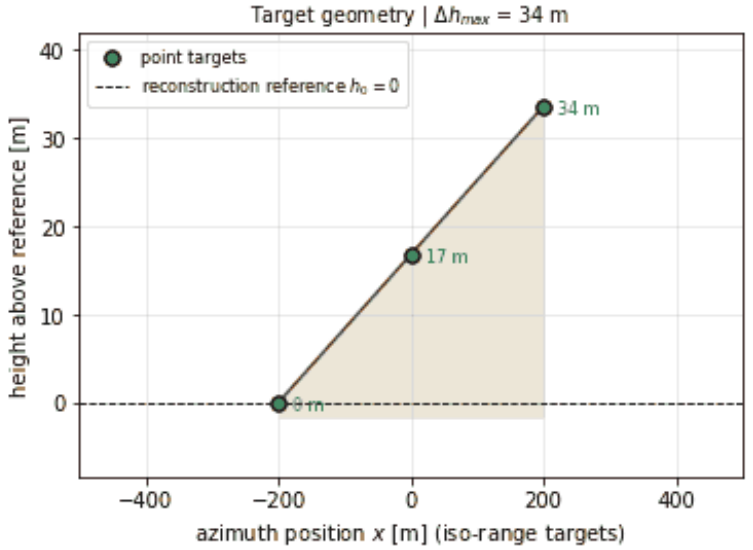



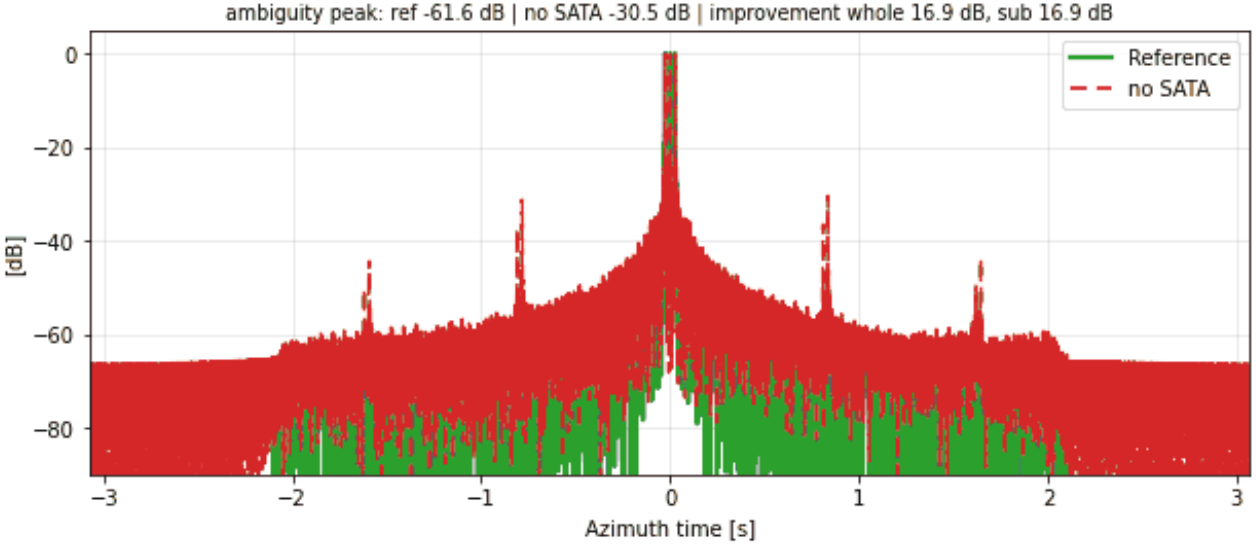



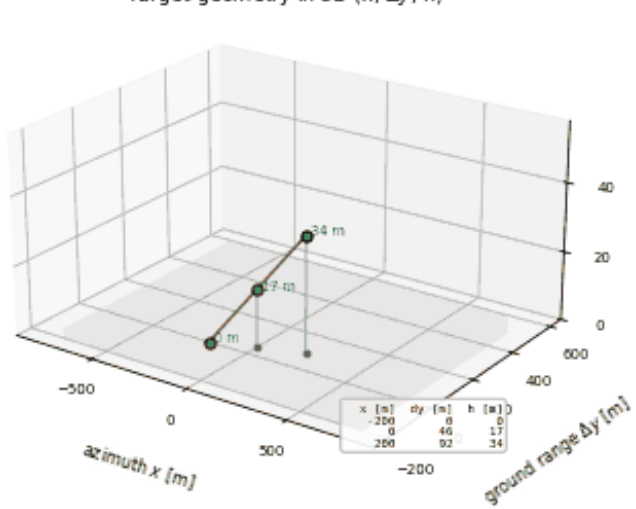
RA-SS-025 | SATA 1D | along-track ramp: N = 3, $\alpha = 40°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

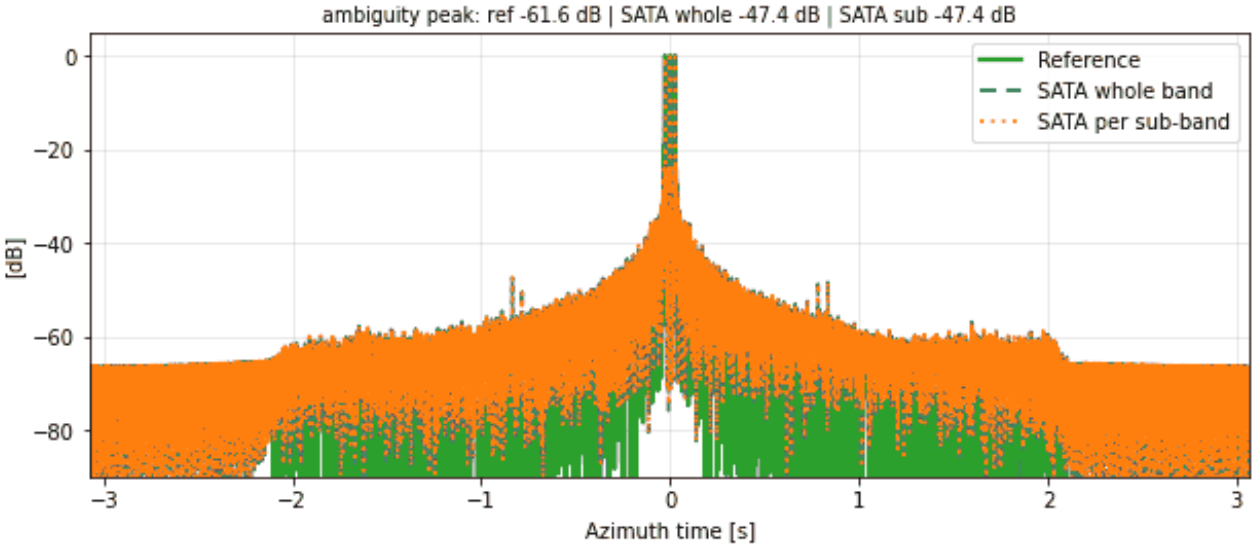





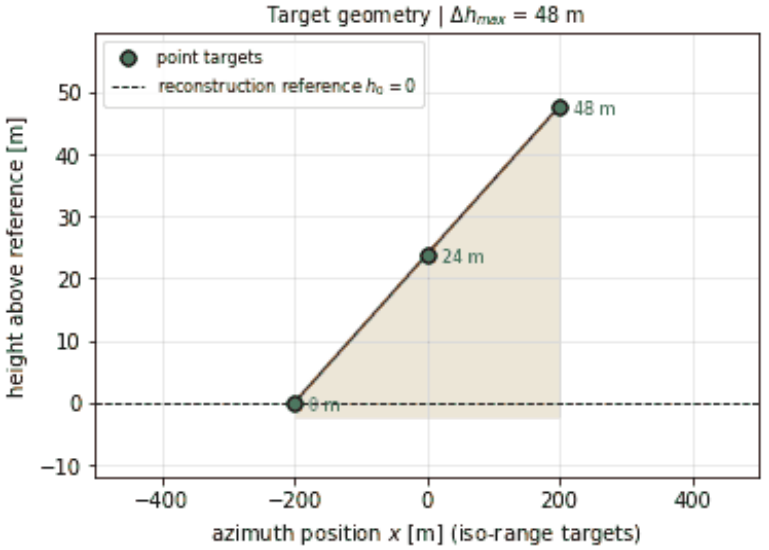



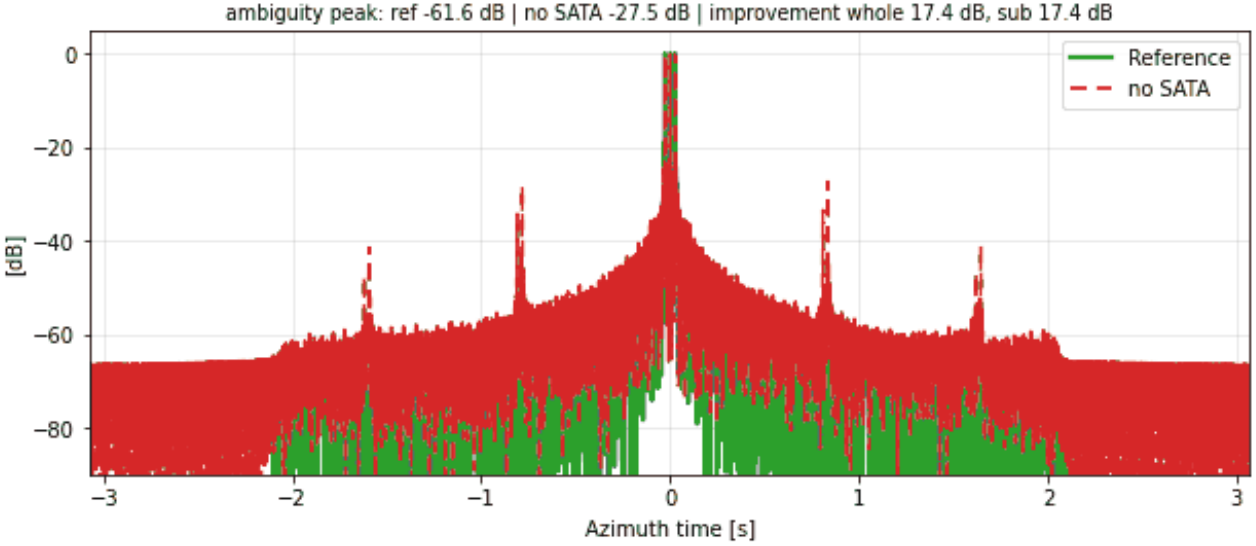



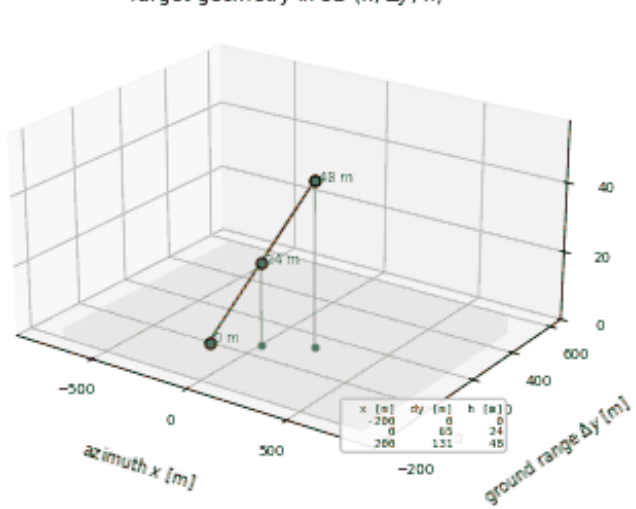
RA-SS-026 | SATA 1D | along-track ramp: N = 3, $\alpha = 50°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

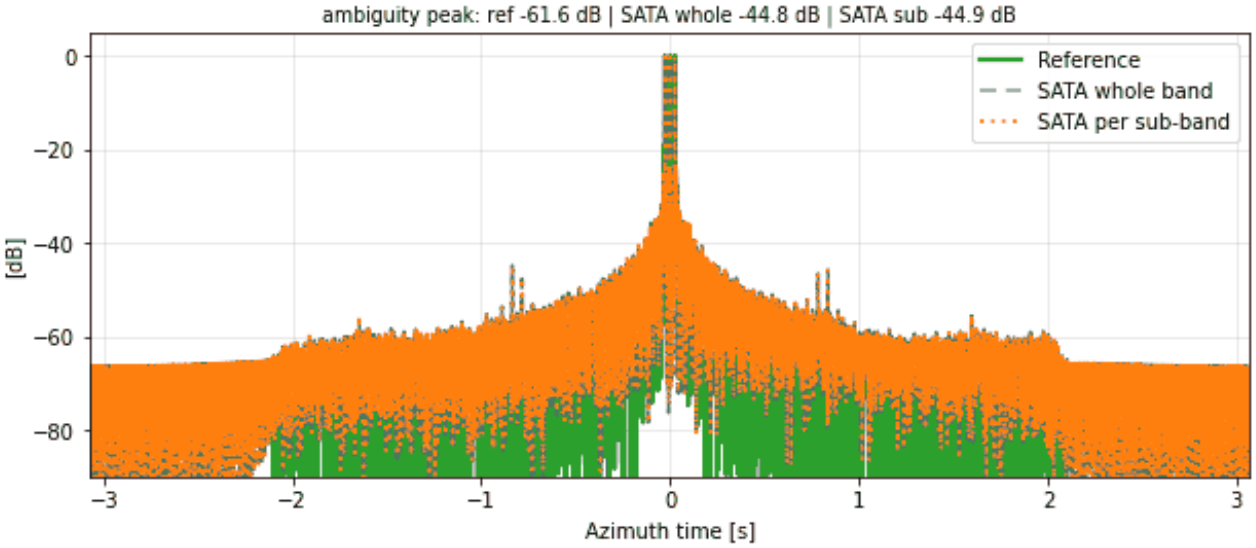





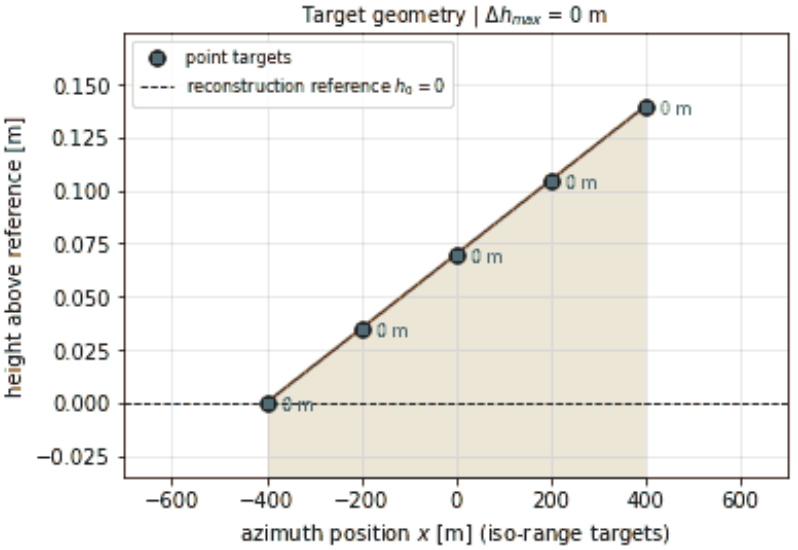



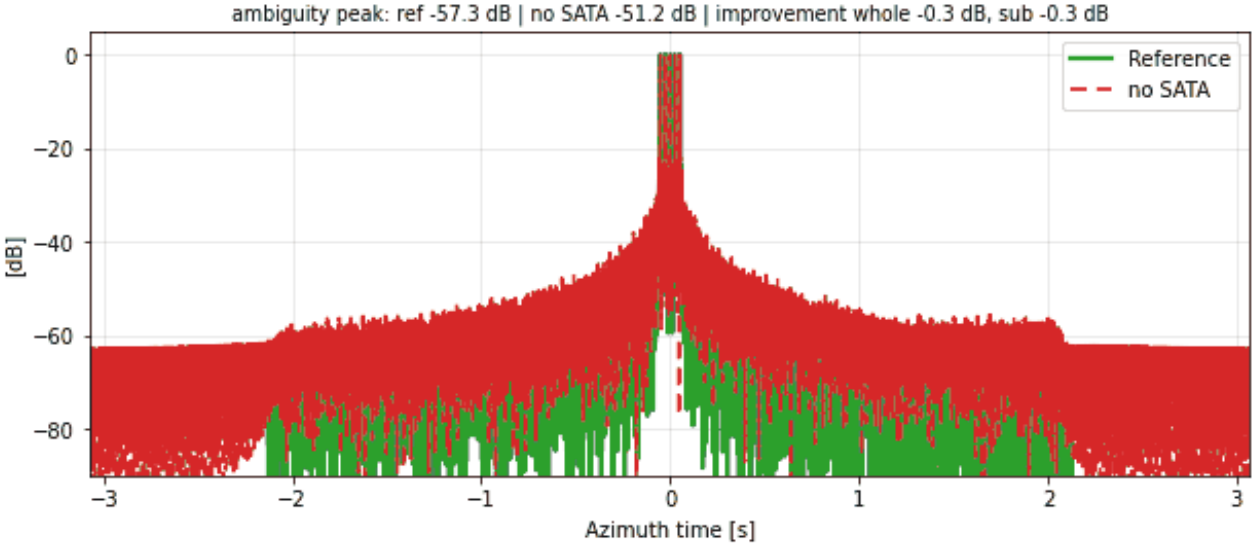



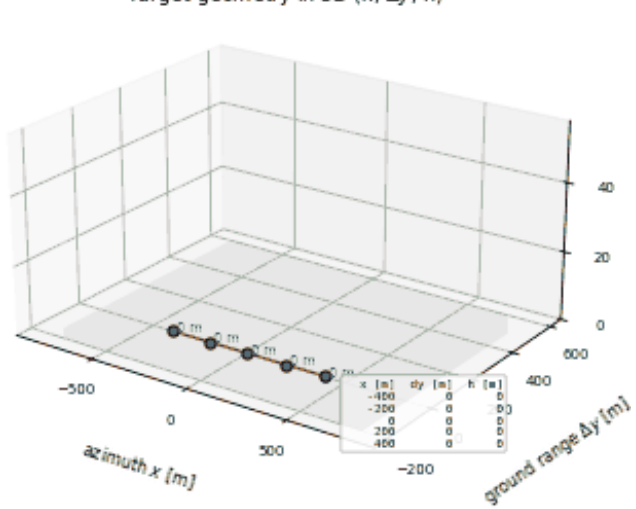
RA-SS-027 | SATA 1D | along-track ramp: N = 5, $\alpha = 0.1°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

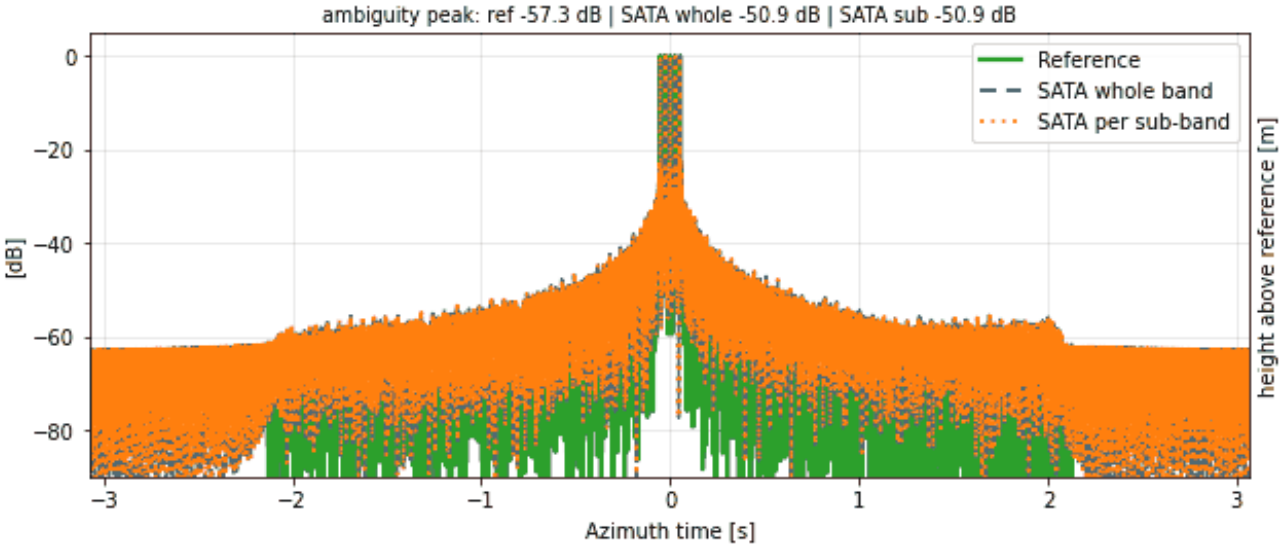





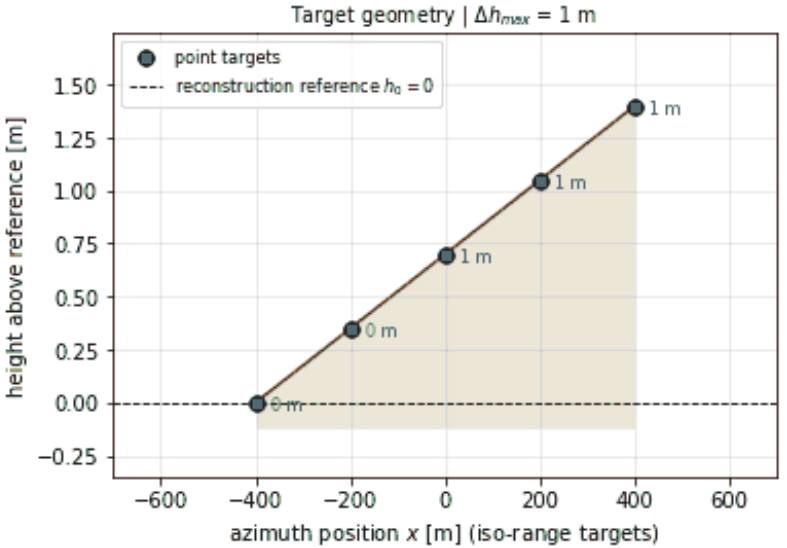



RA-SS-028 | SATA 1D | along-track ramp: N = 5, $\alpha = 1^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights


$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



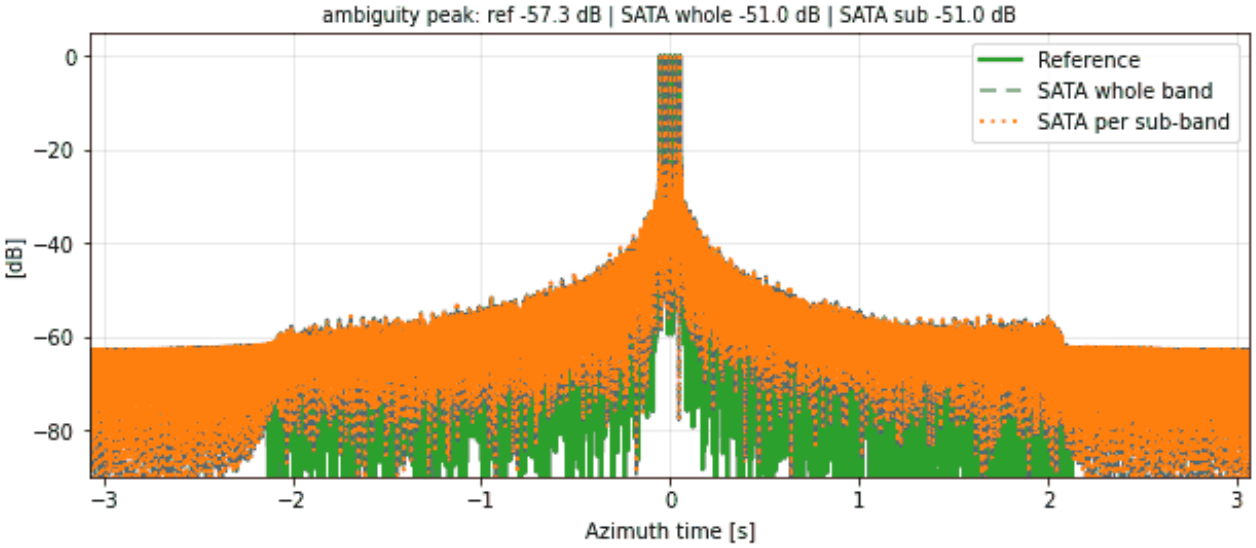





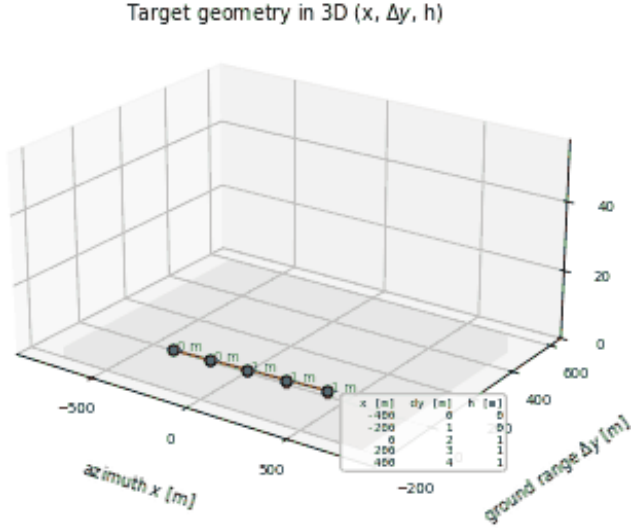



RA-SS-029 | SATA 1D | along-track ramp: N = 5, $\alpha = 1.5°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

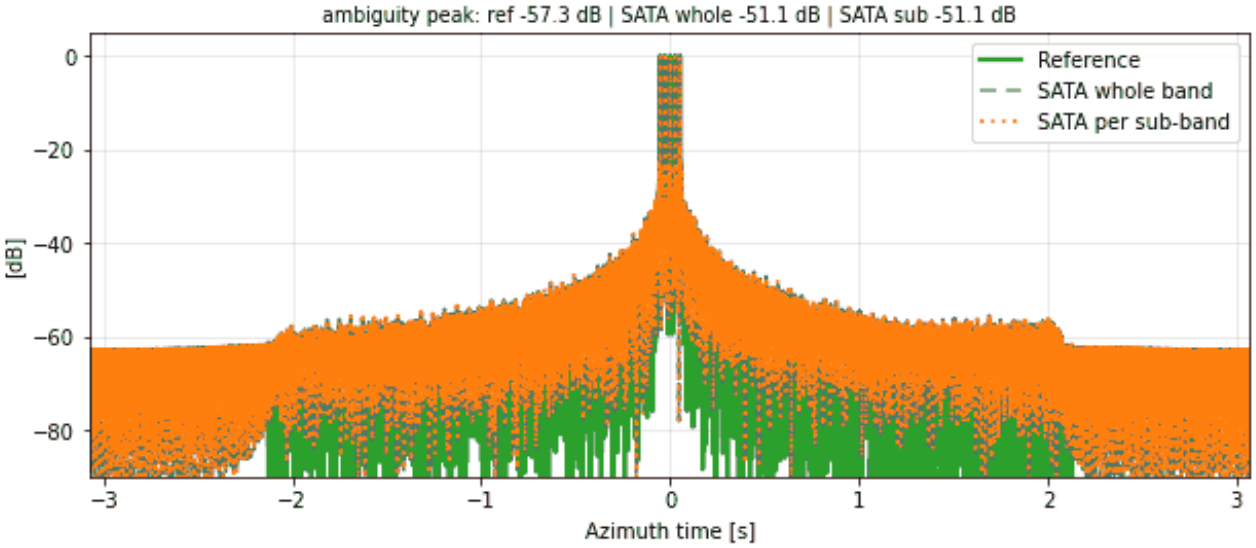

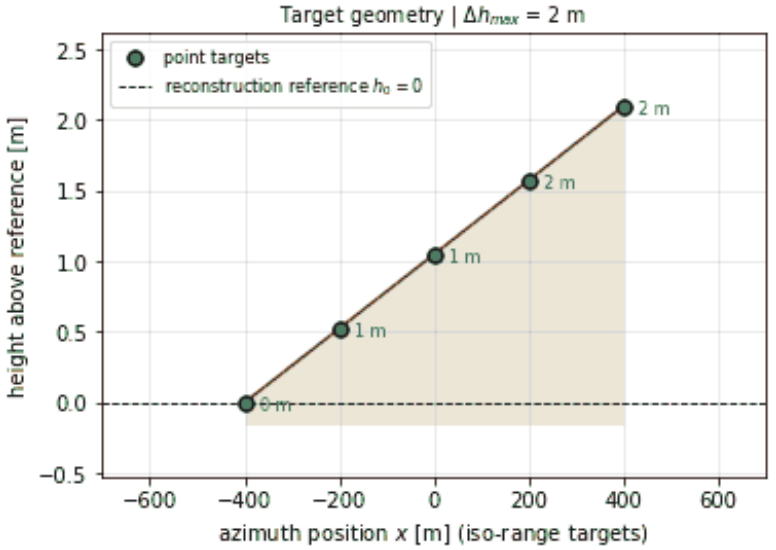


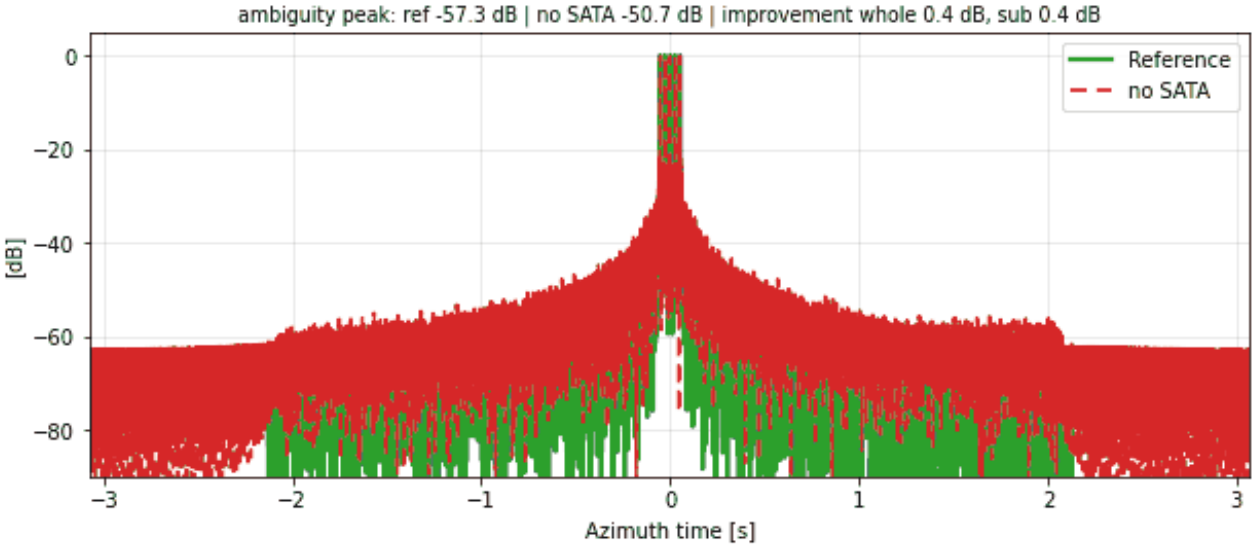
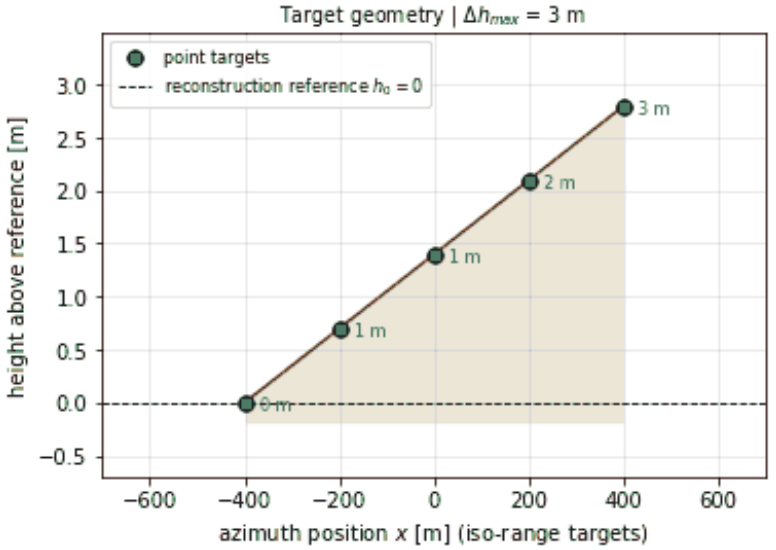


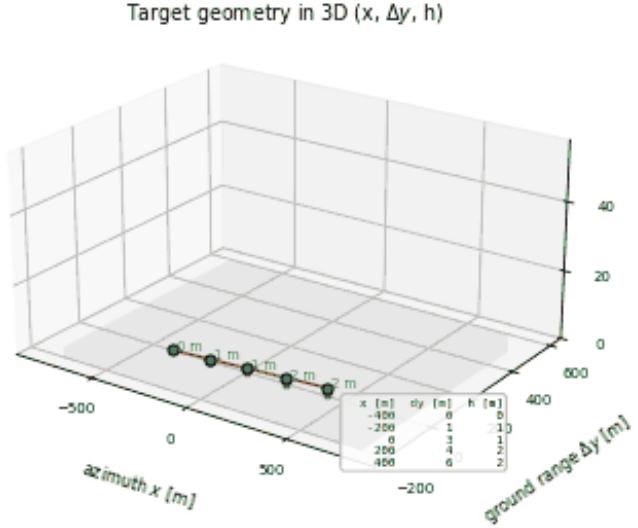
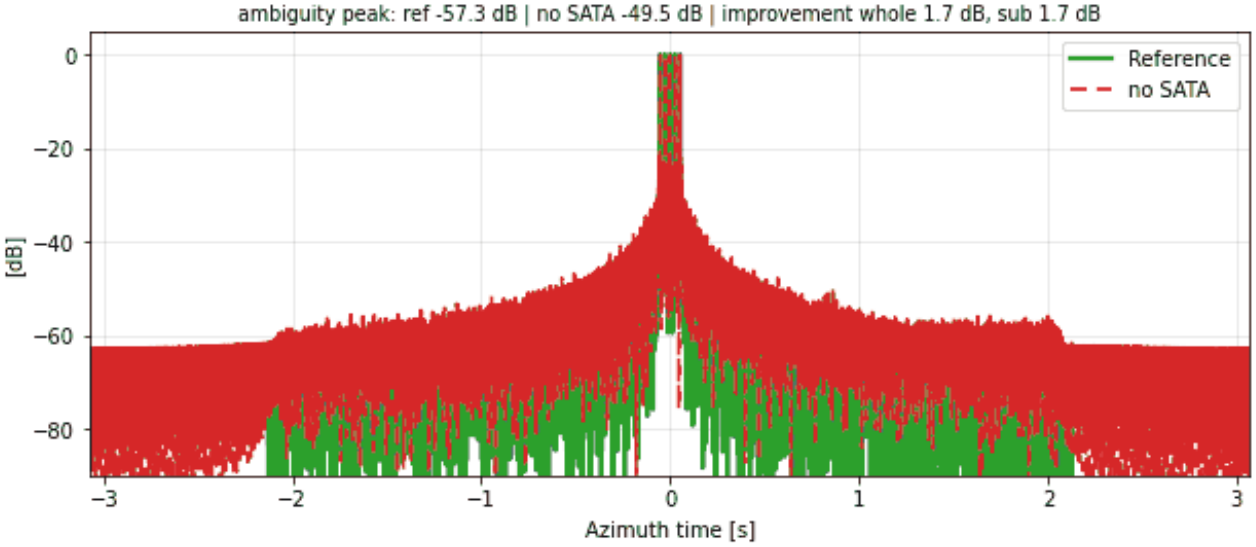



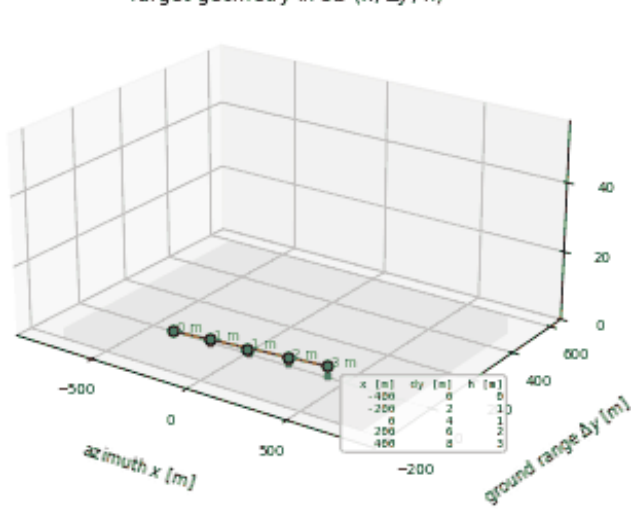
RA-SS-030 | SATA 1D | along-track ramp: N = 5, $\alpha = 2°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

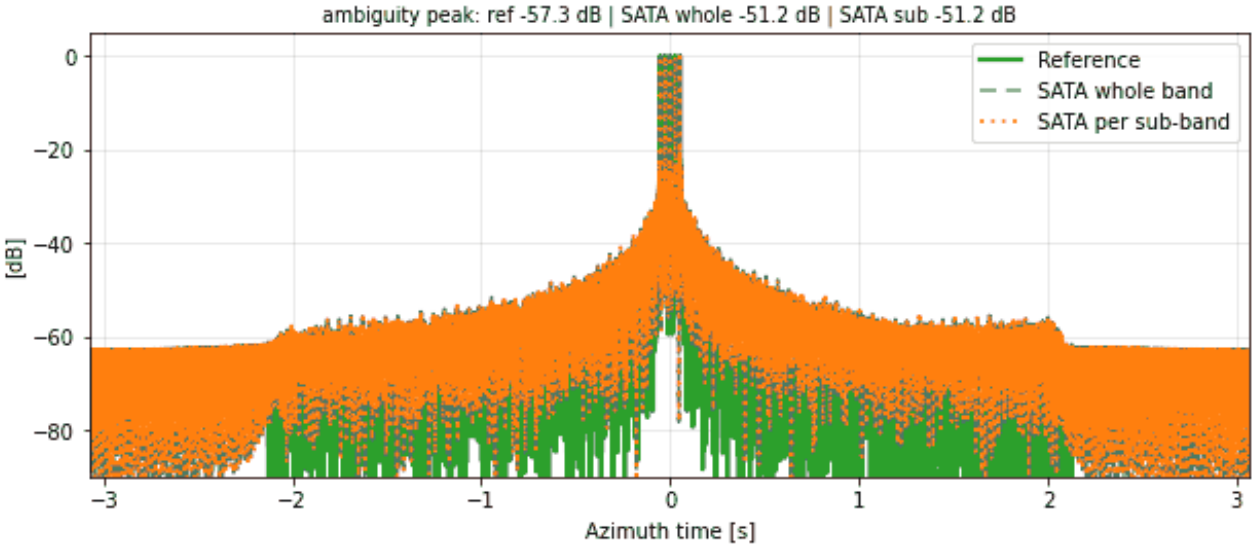





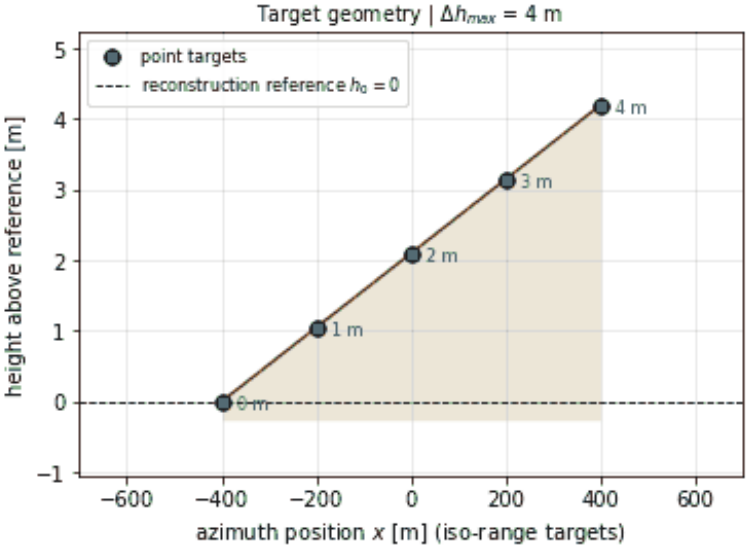



RA-SS-031 | SATA 1D | along-track ramp: N = 5, $\alpha = 3°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights


$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



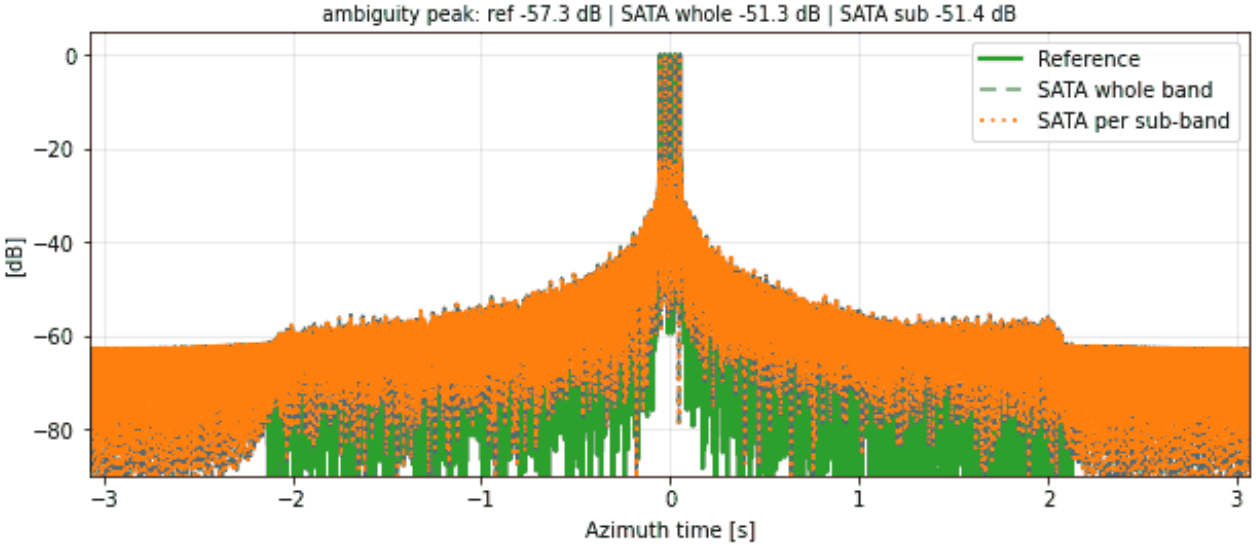





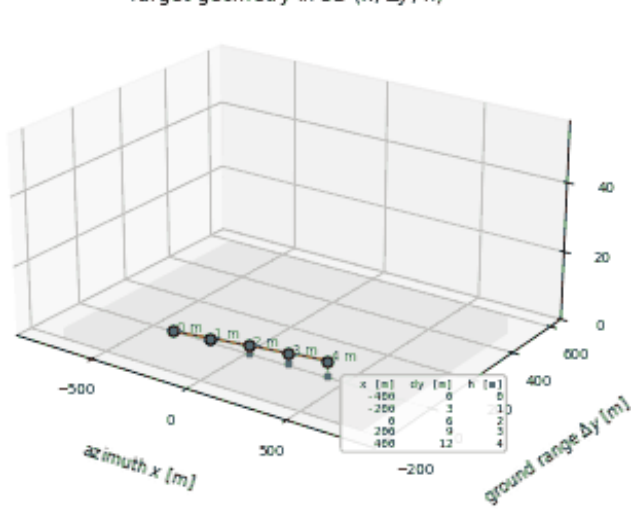



RA-SS-032 | SATA 1D | along-track ramp: N = 5, $\alpha = 4°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

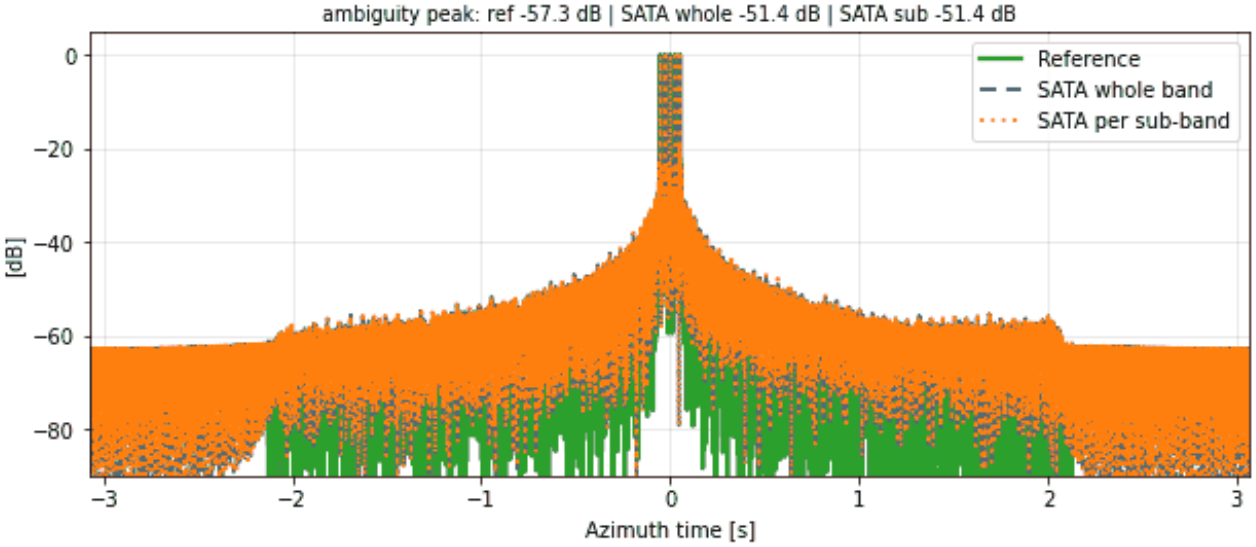

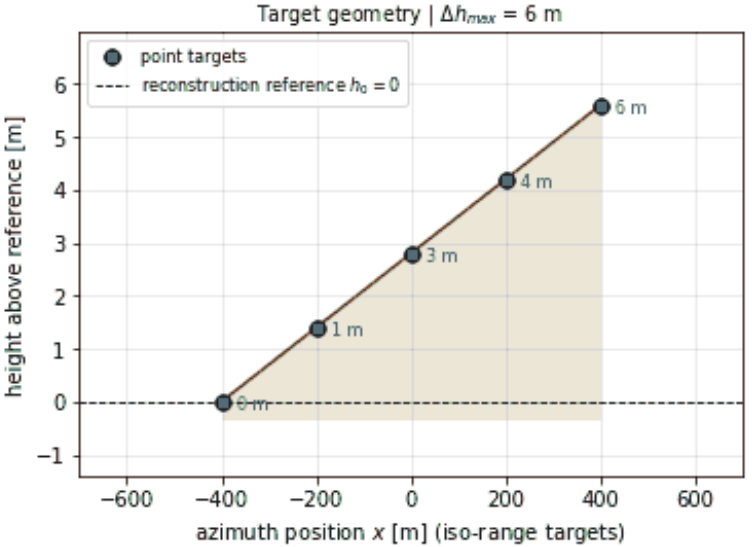


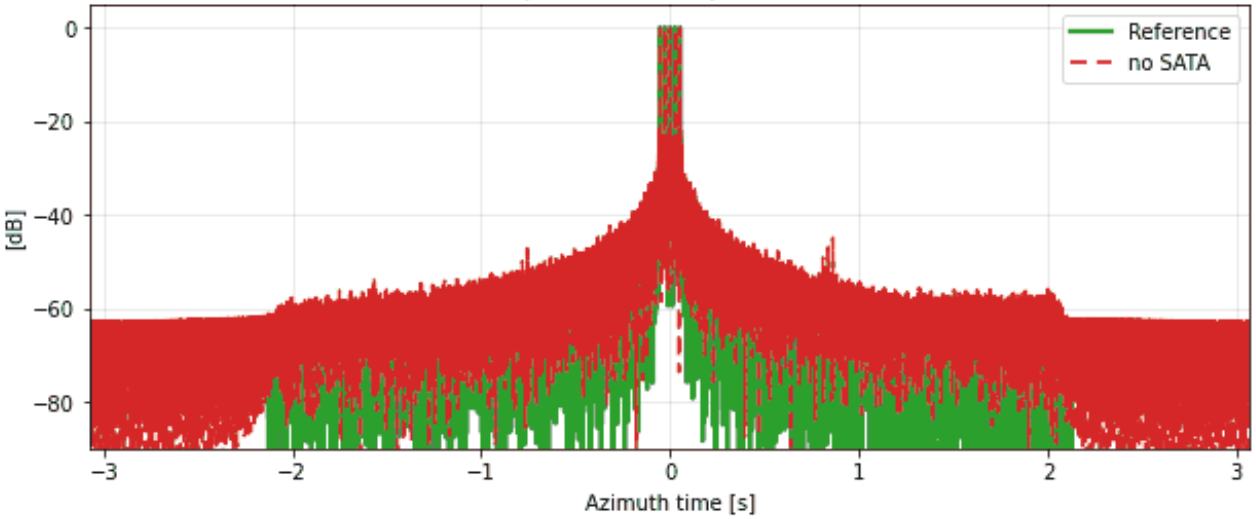
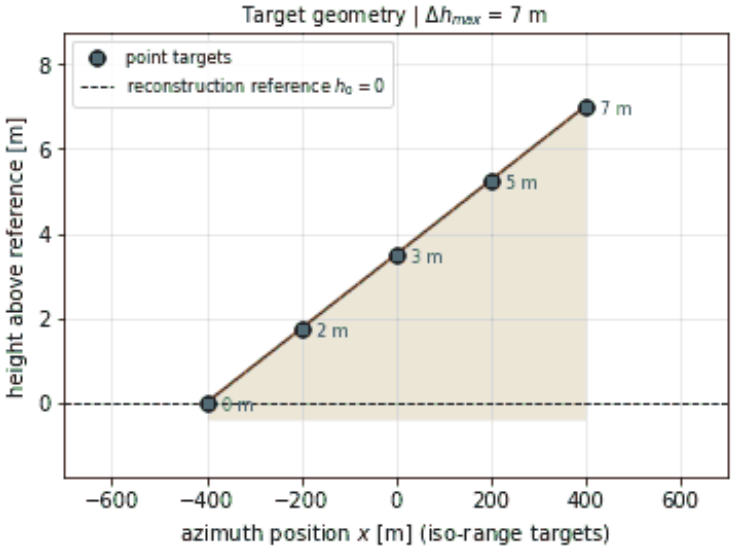


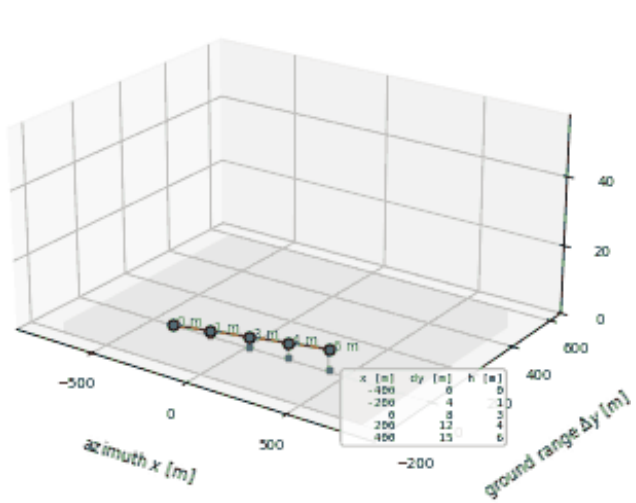
RA-SS-033 | SATA 1D | along-track ramp: N = 5, $\alpha = 5°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights


$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



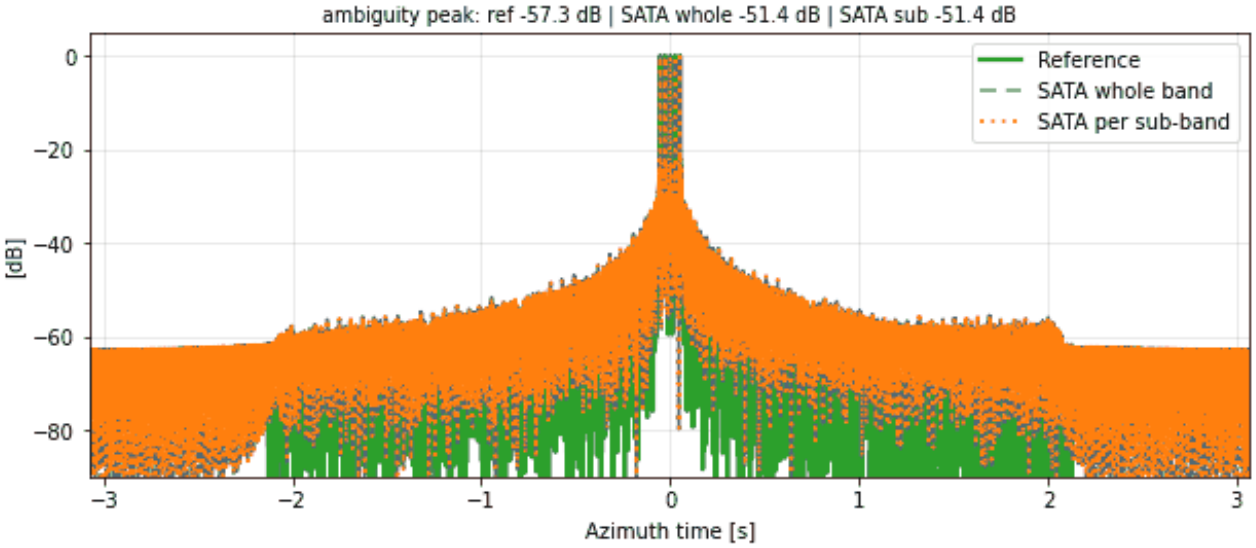



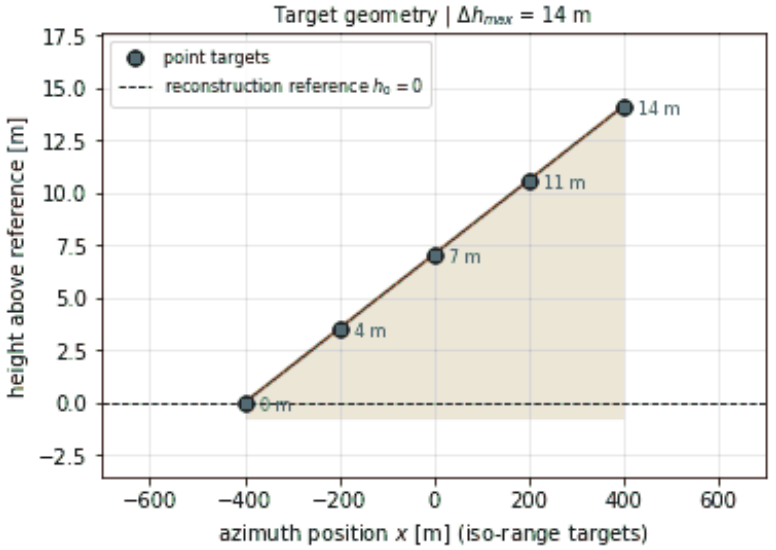





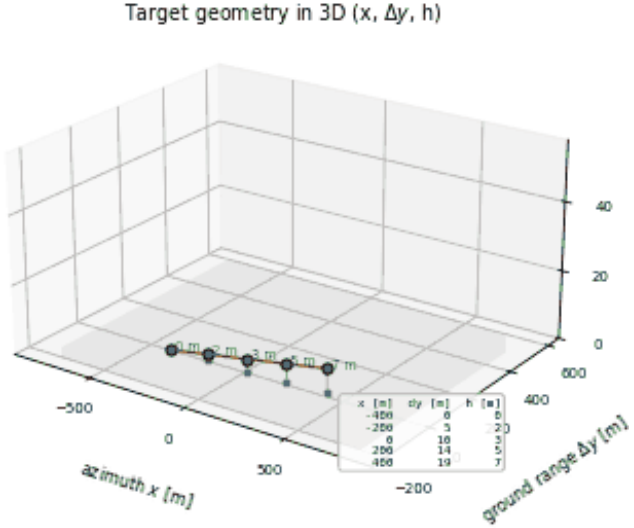


RA-SS-034 | SATA 1D | along-track ramp: N = 5, $\alpha = 10^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

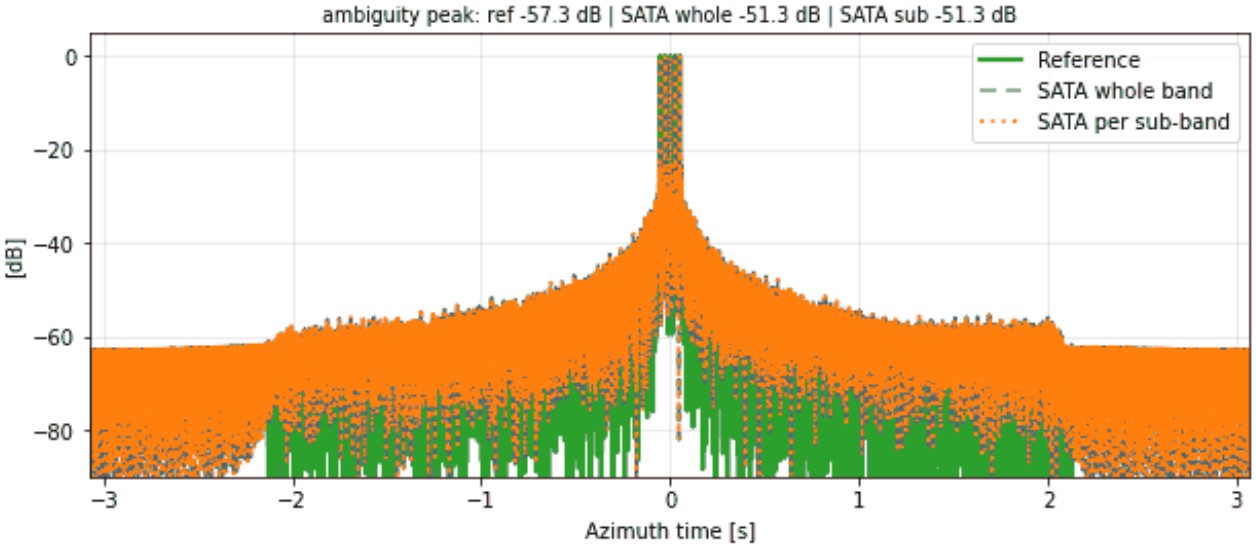


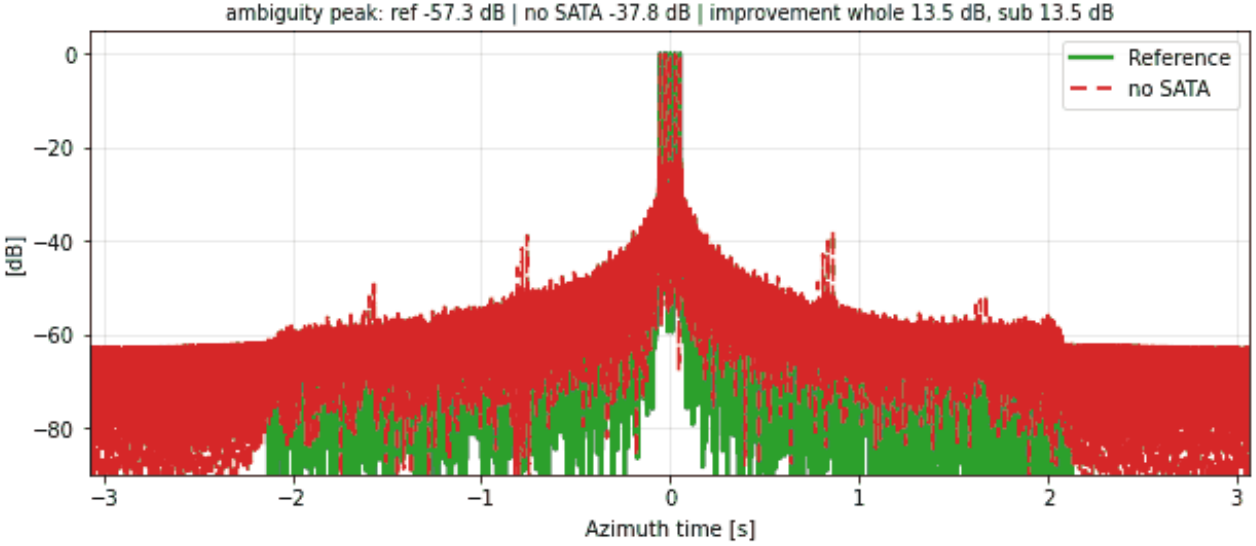



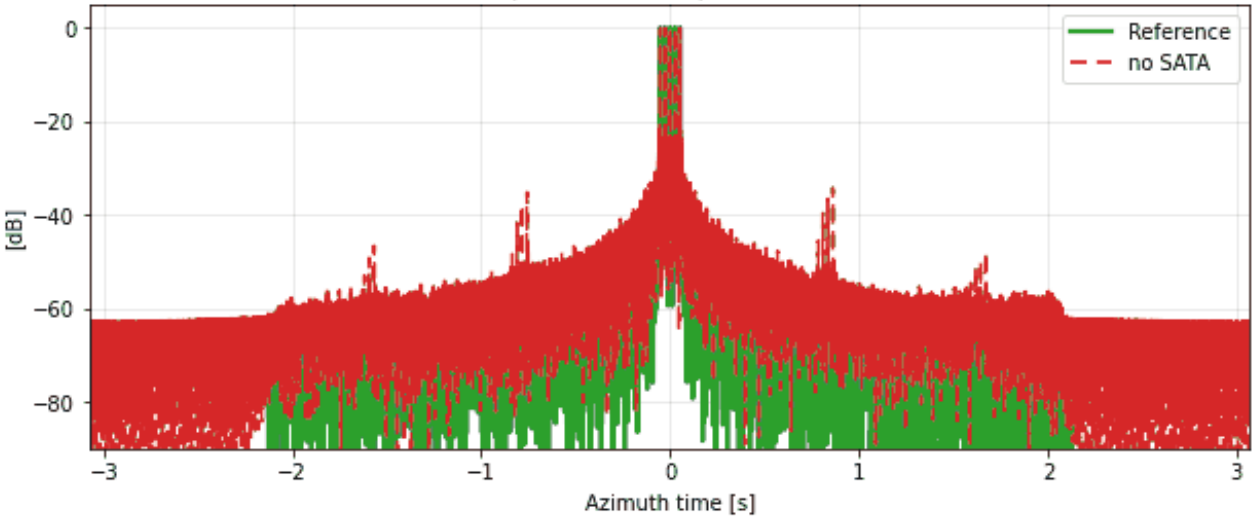


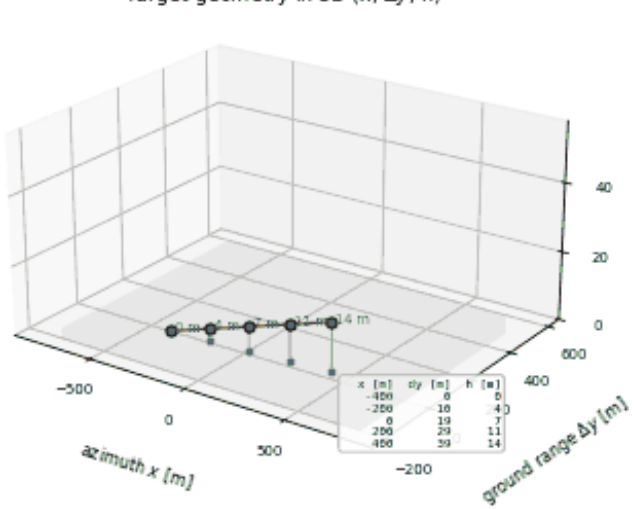
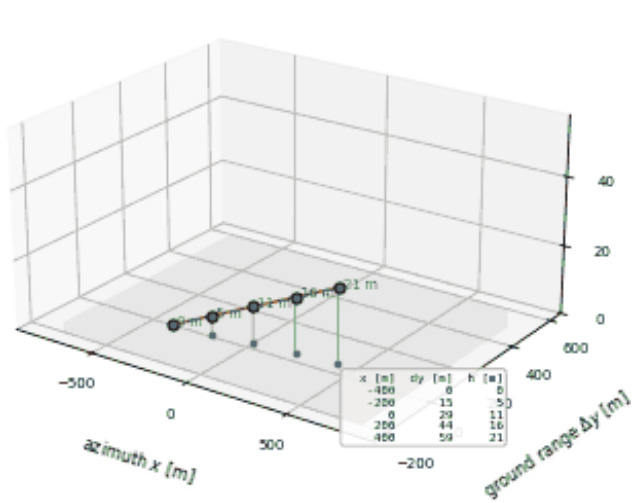



RA-SS-035 | SATA 1D | along-track ramp: N = 5, $\alpha = 15^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

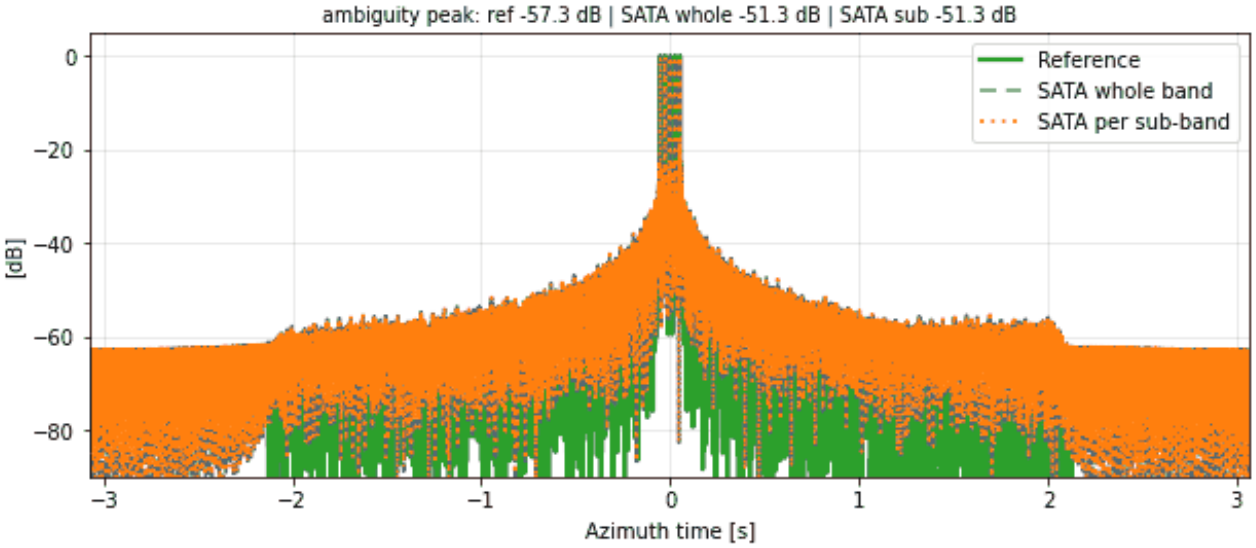

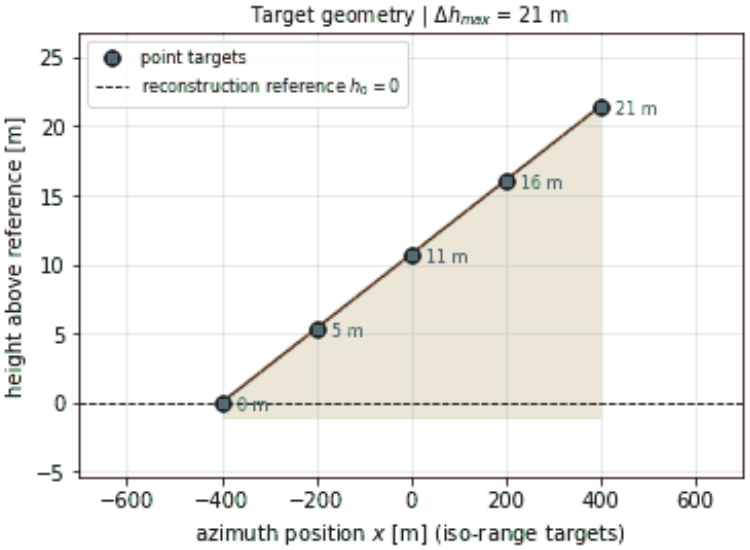



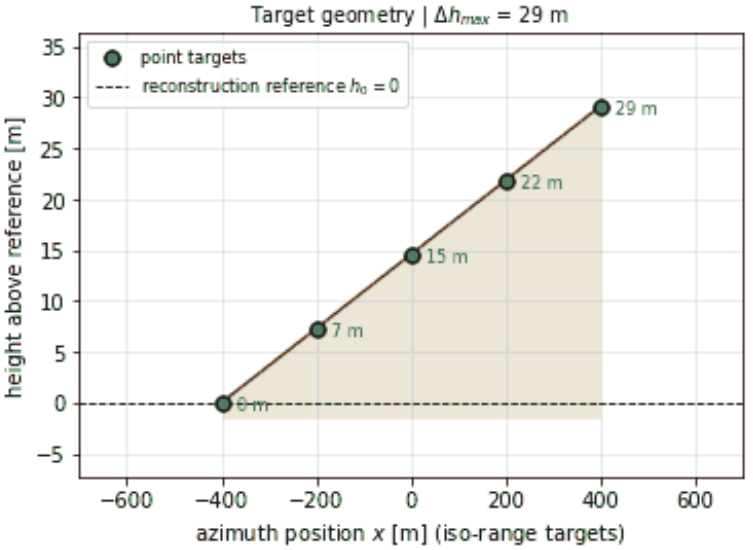



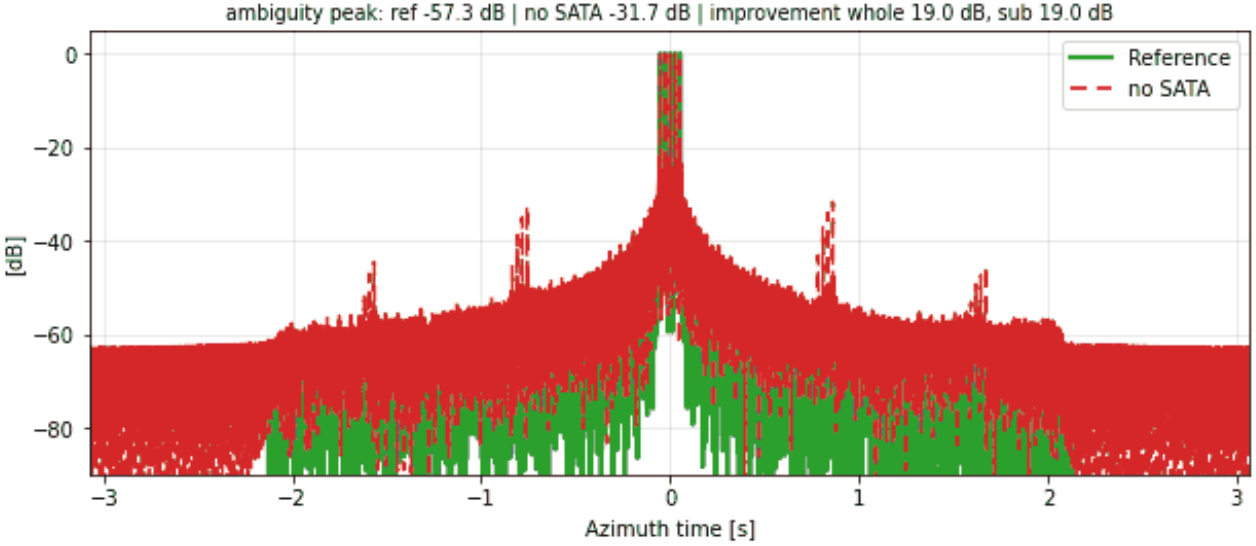



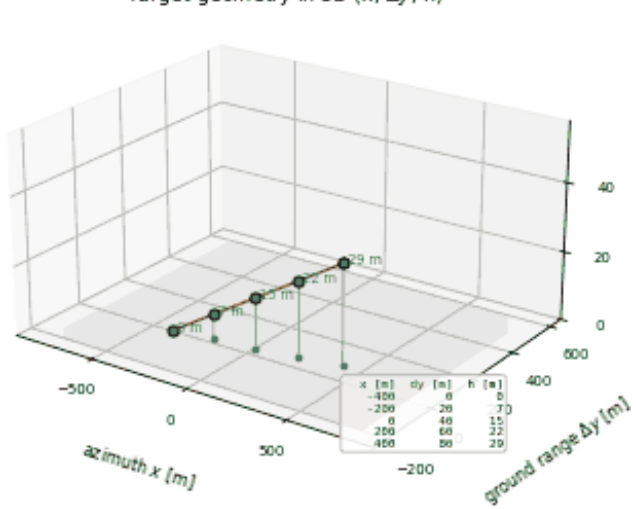
RA-SS-036 | SATA 1D | along-track ramp: N = 5, $\alpha = 20^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

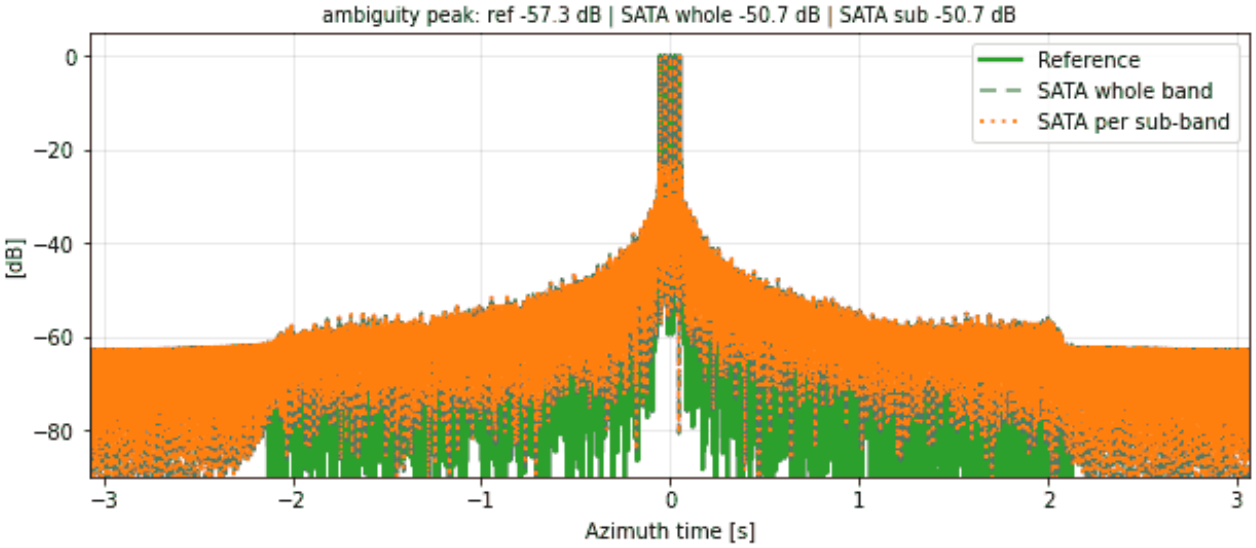





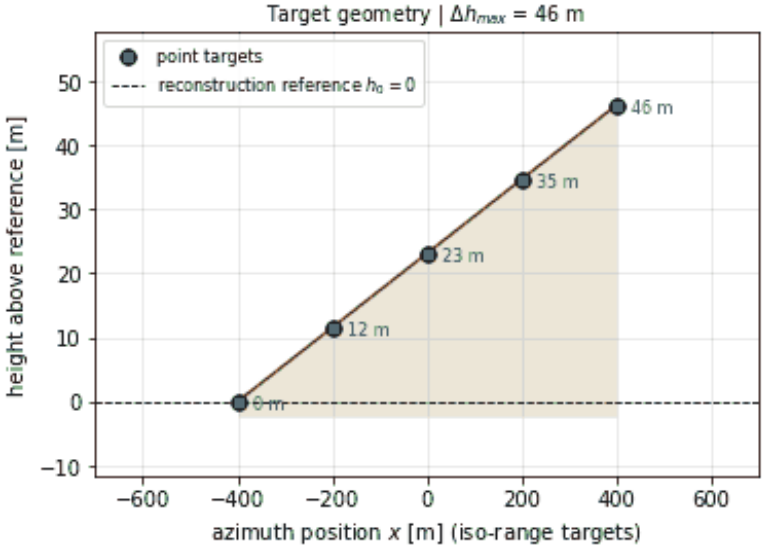



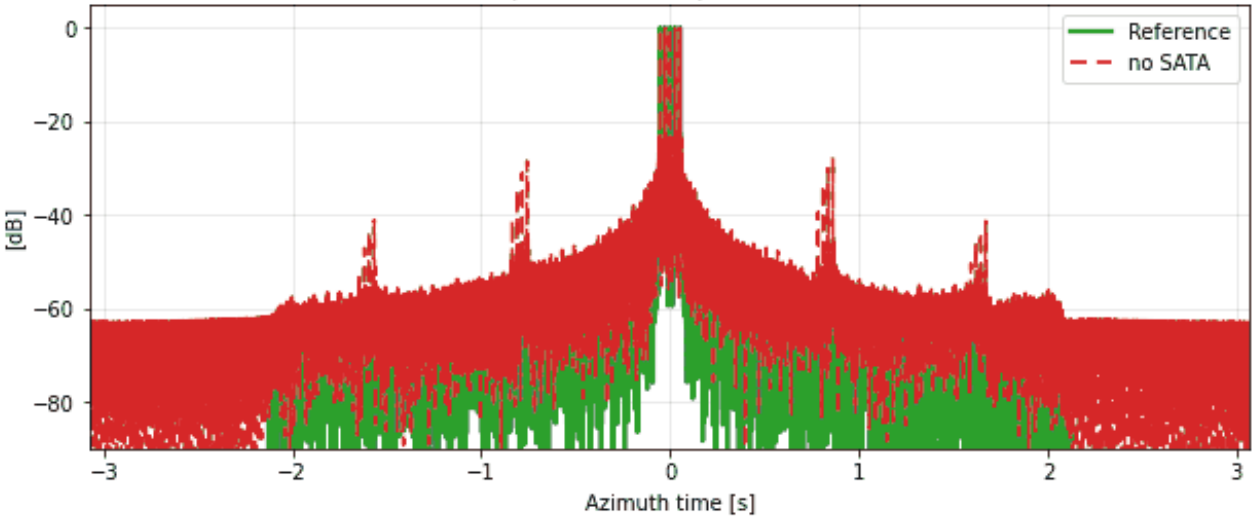



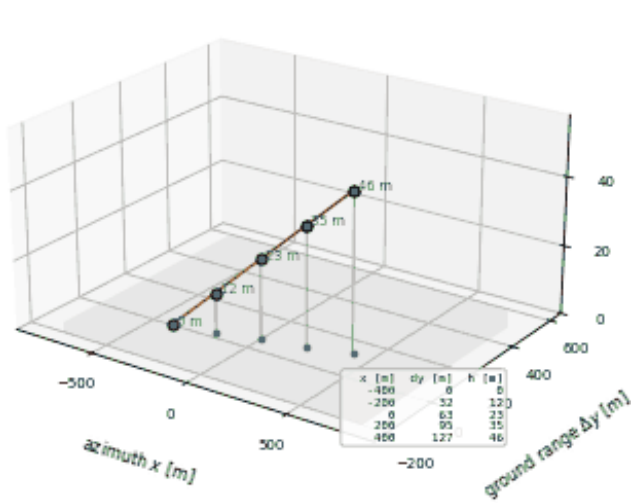
RA-SS-037 | SATA 1D | along-track ramp: N = 5, $\alpha = 30^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

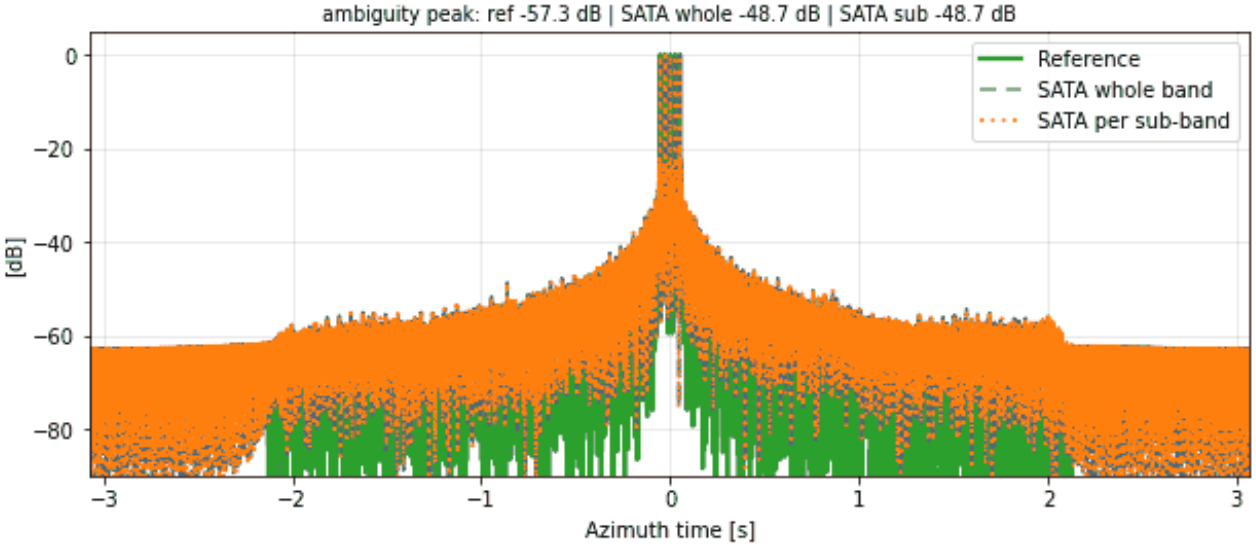





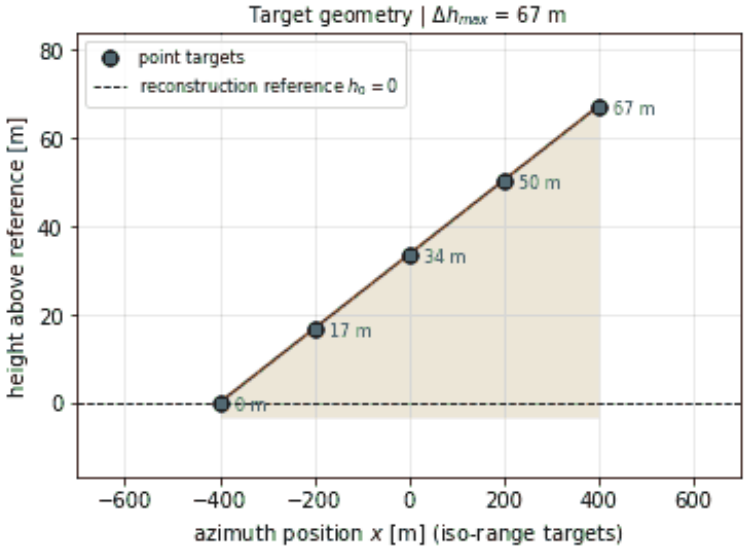



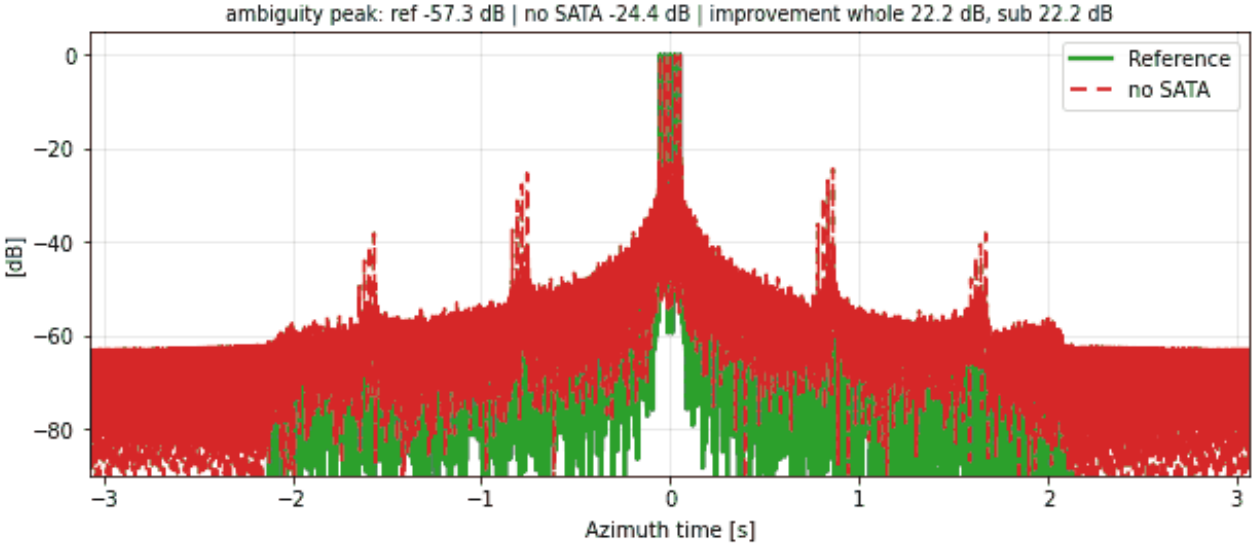



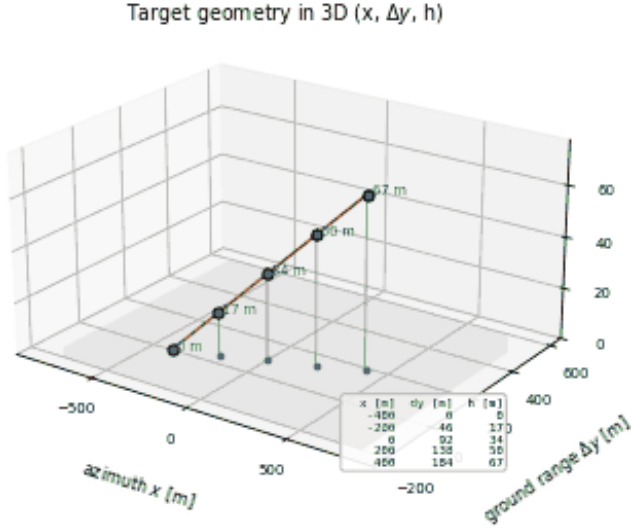
RA-SS-038 | SATA 1D | along-track ramp: N = 5, $\alpha = 40^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

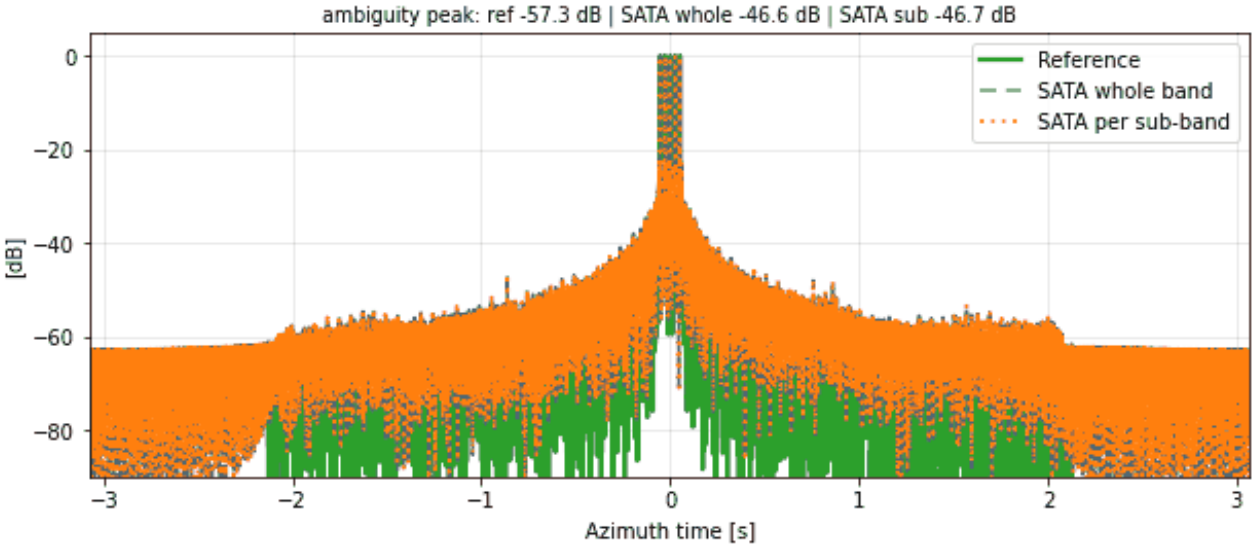





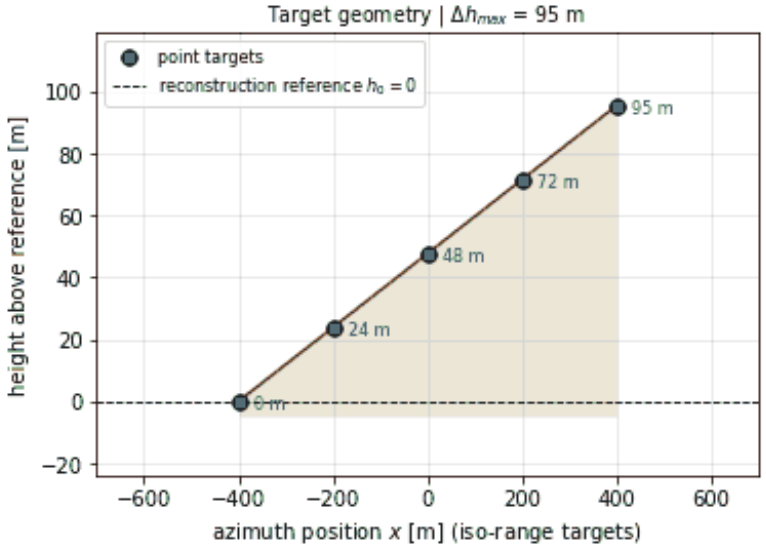



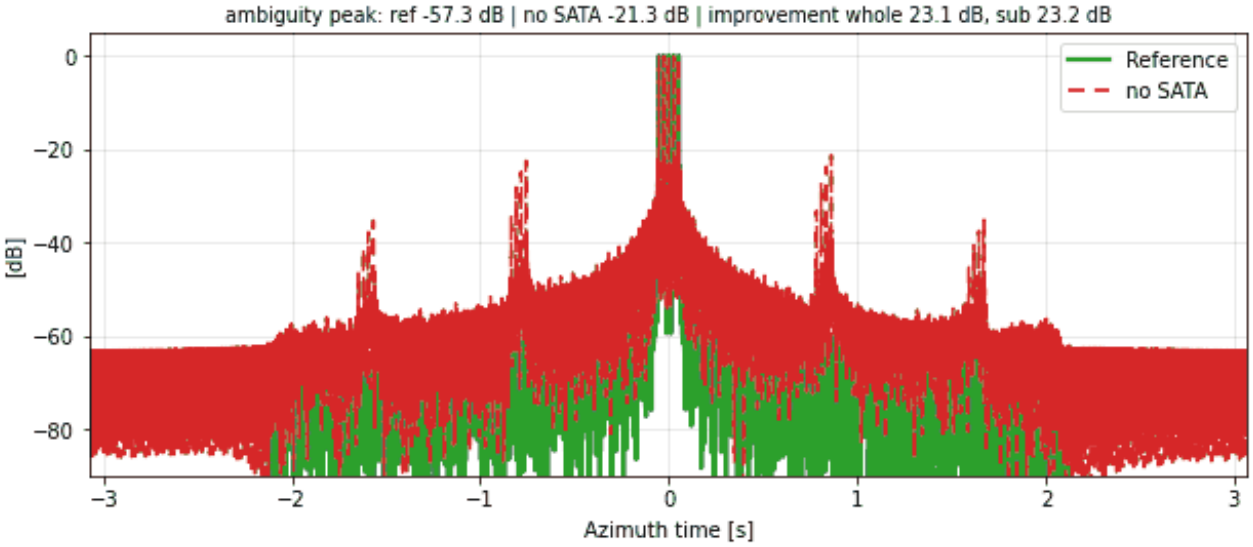



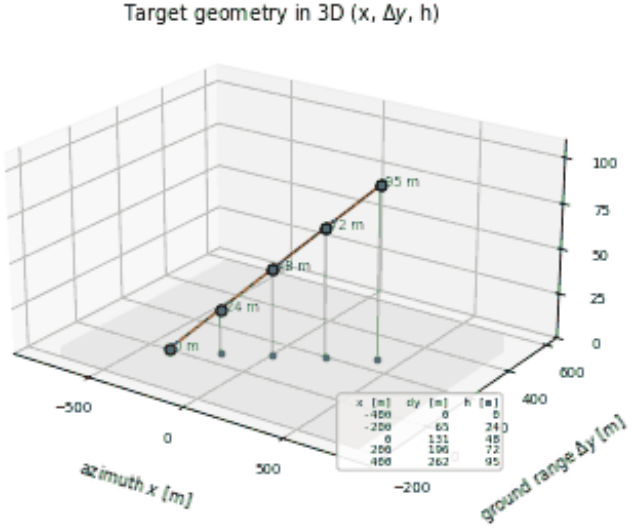
RA-SS-039 | SATA 1D | along-track ramp: N = 5, $\alpha = 50^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

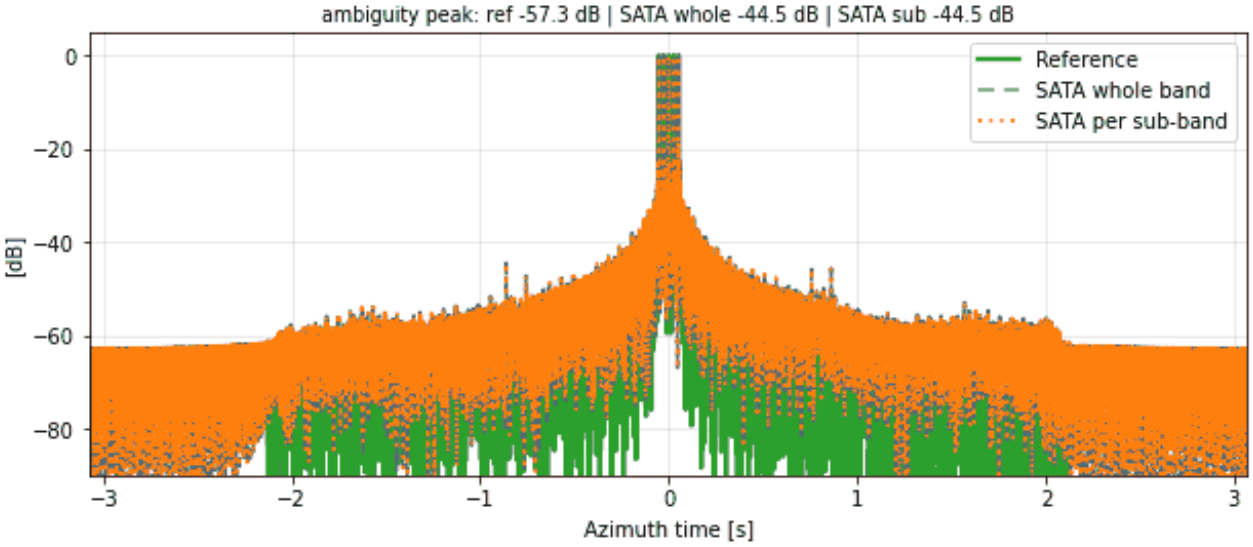





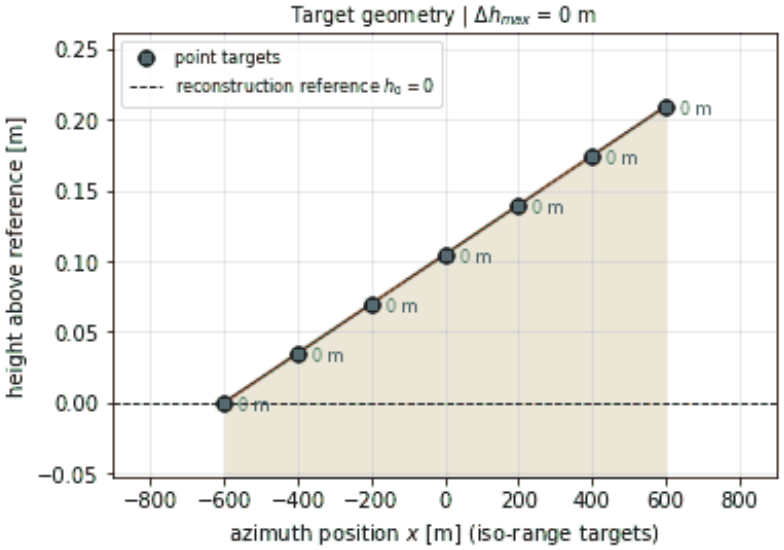



RA-SS-040 | SATA 1D | along-track ramp: N = 7, $\alpha = 0.1°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights


$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



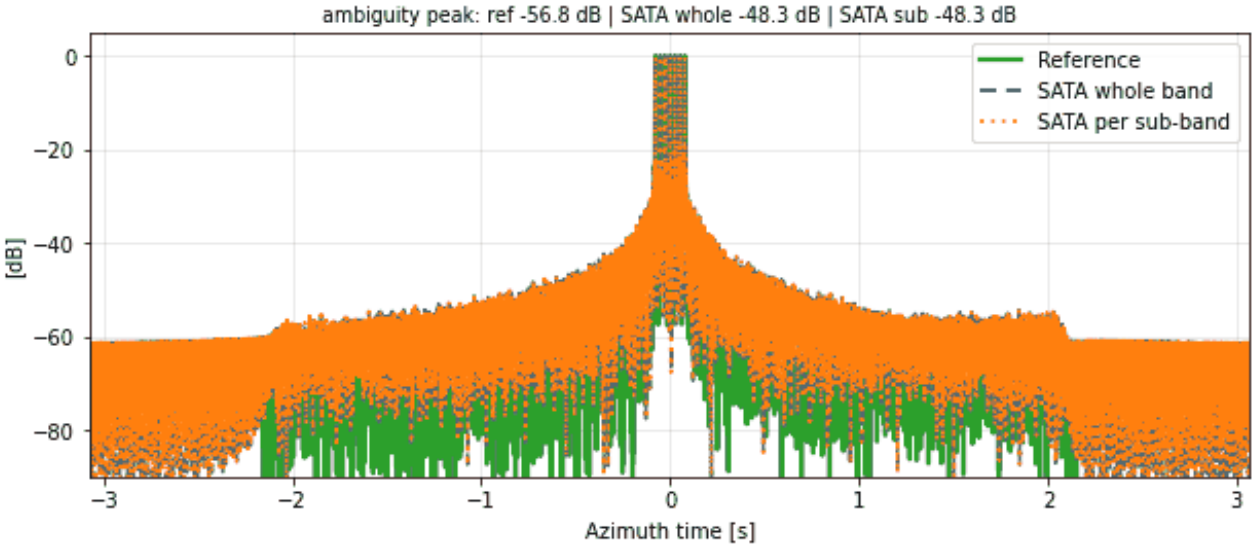





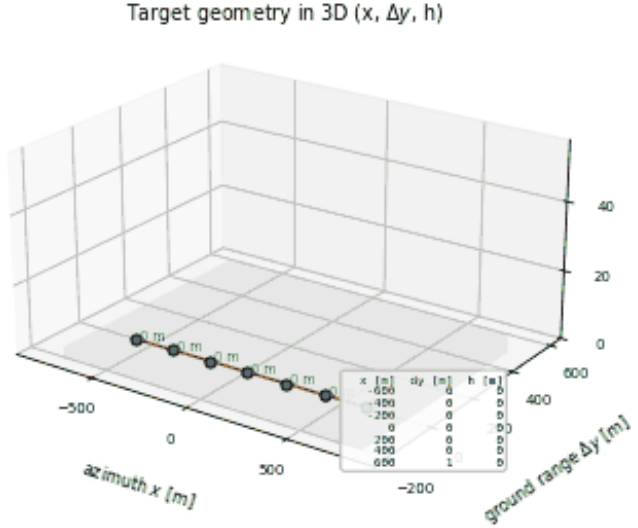



RA-SS-041 | SATA 1D | along-track ramp: N = 7, $\alpha = 1°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

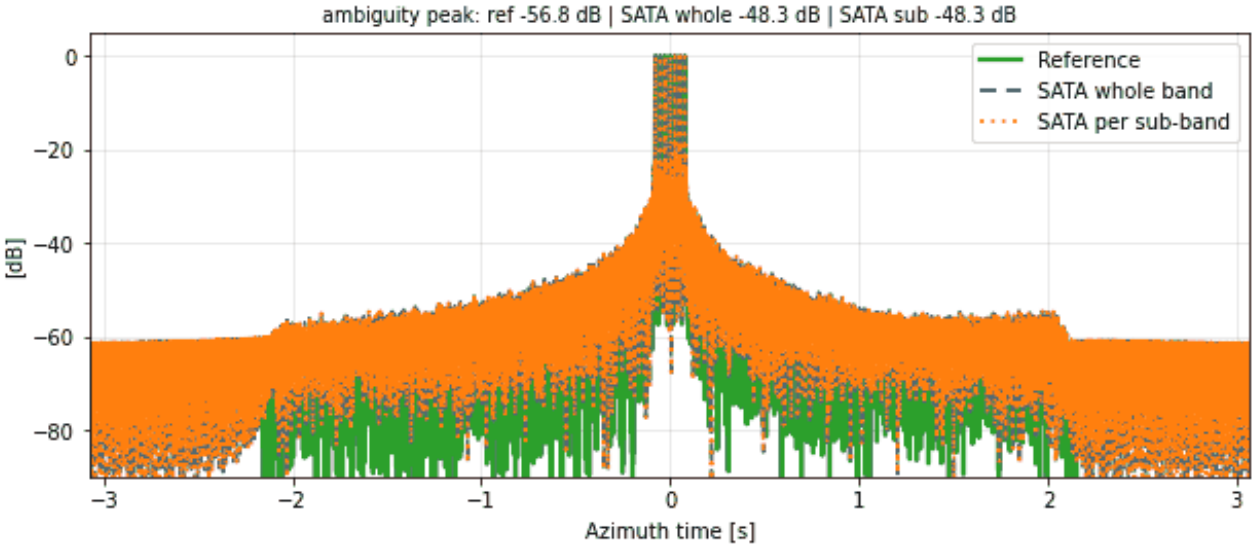

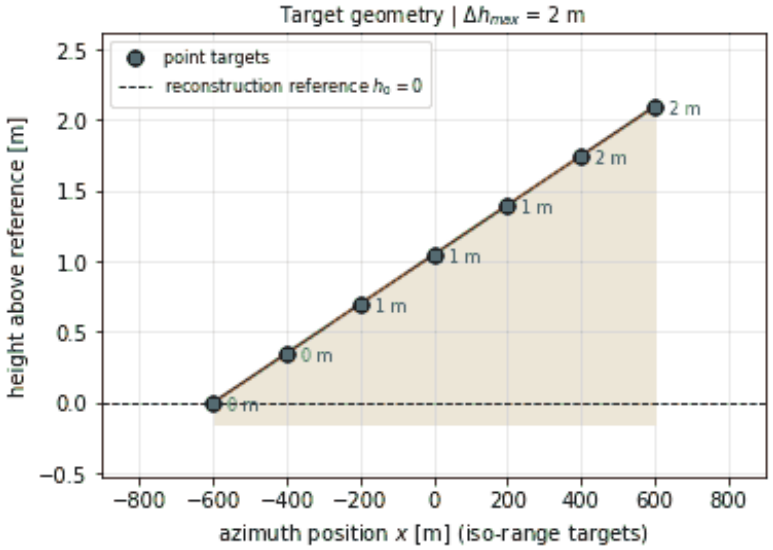


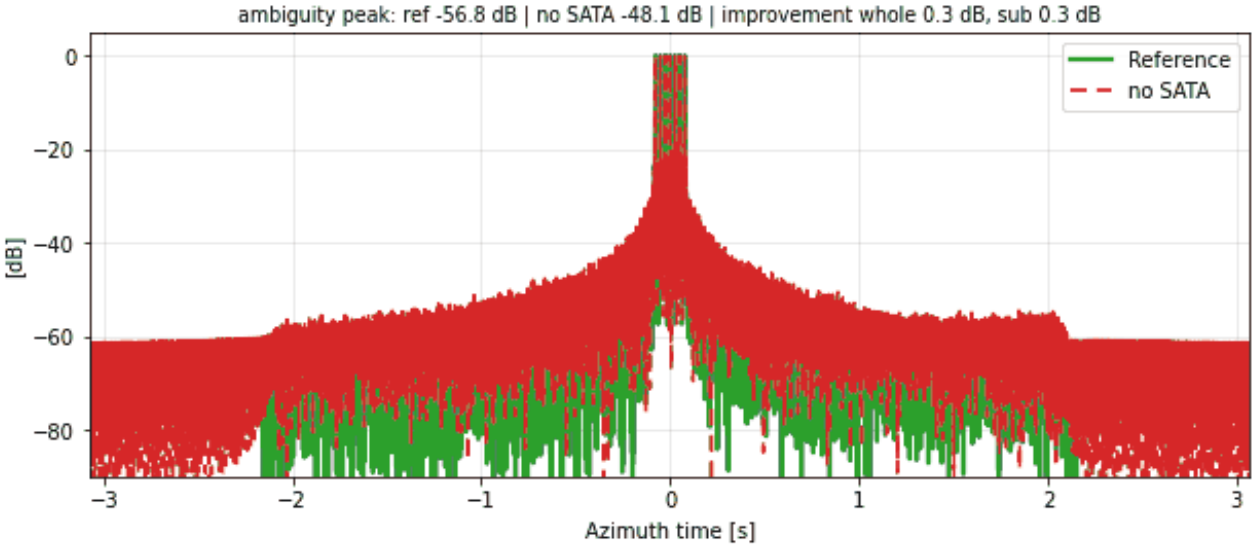
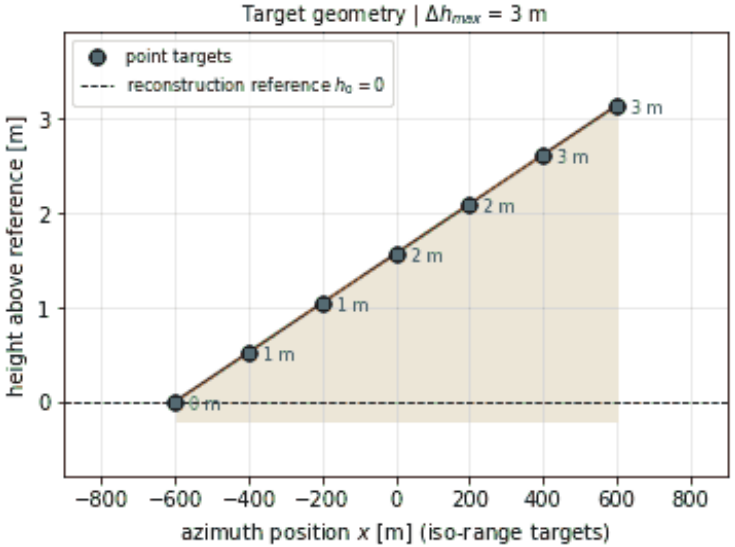


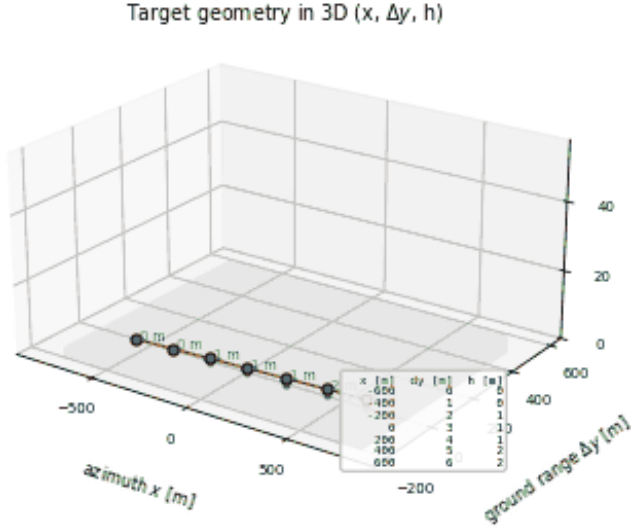
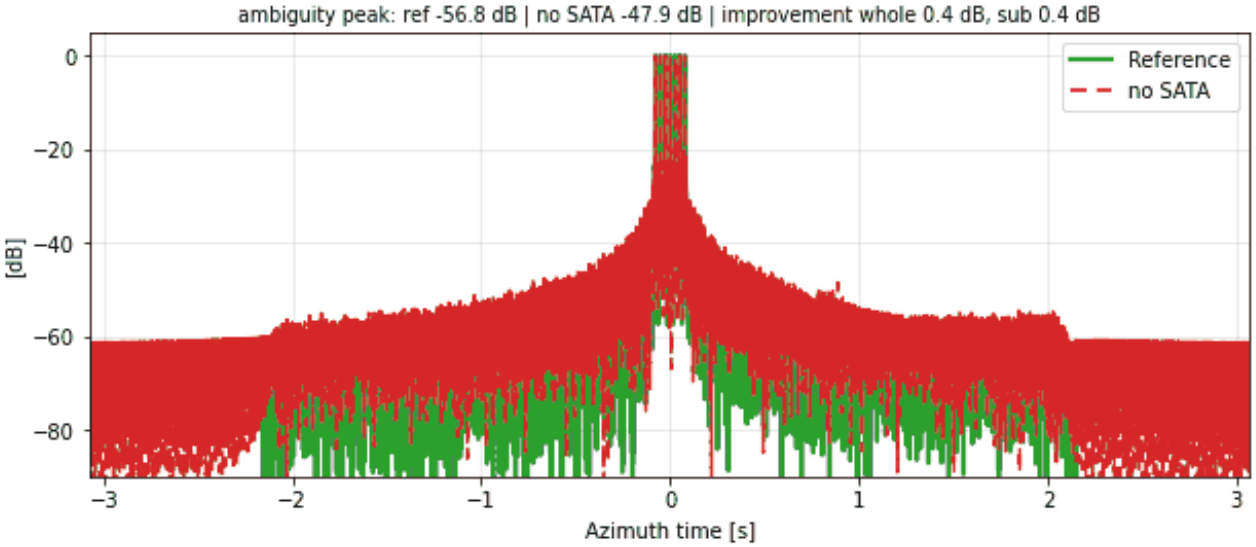



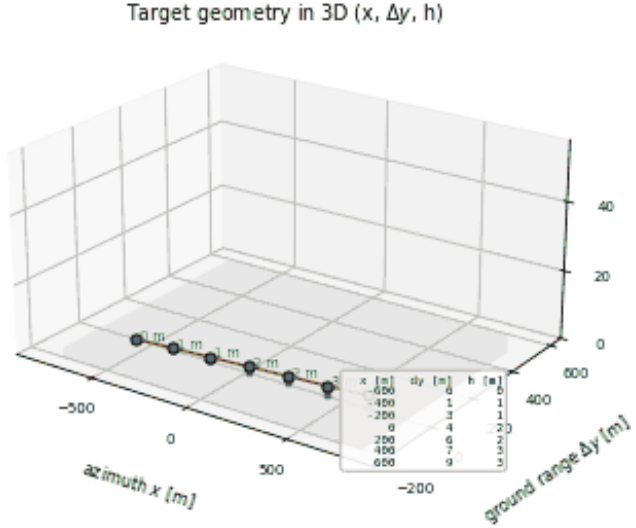
RA-SS-042 | SATA 1D | along-track ramp: N = 7, $\alpha = 1.5°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

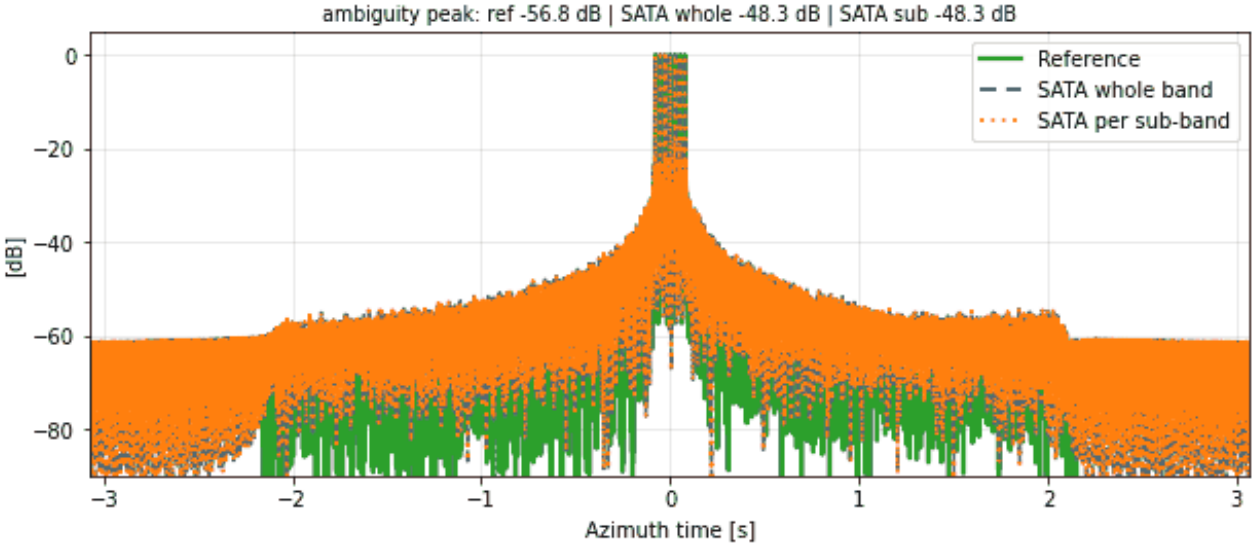





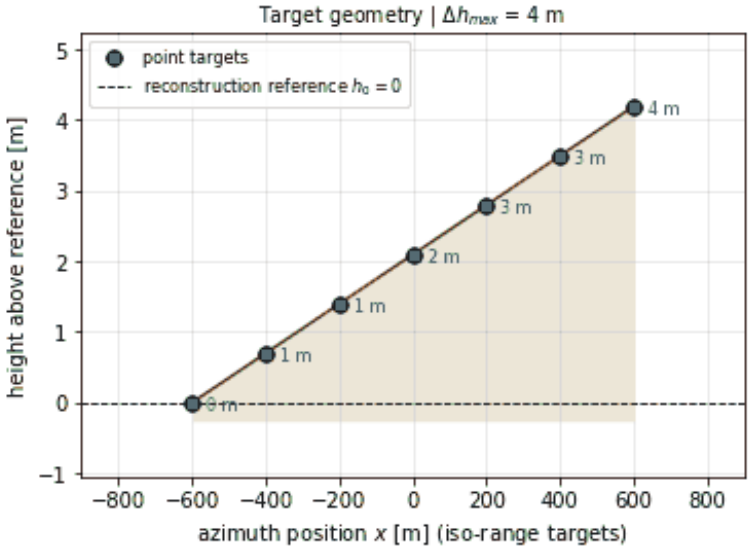



RA-SS-043 | SATA 1D | along-track ramp: N = 7, $\alpha = 2°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights


$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



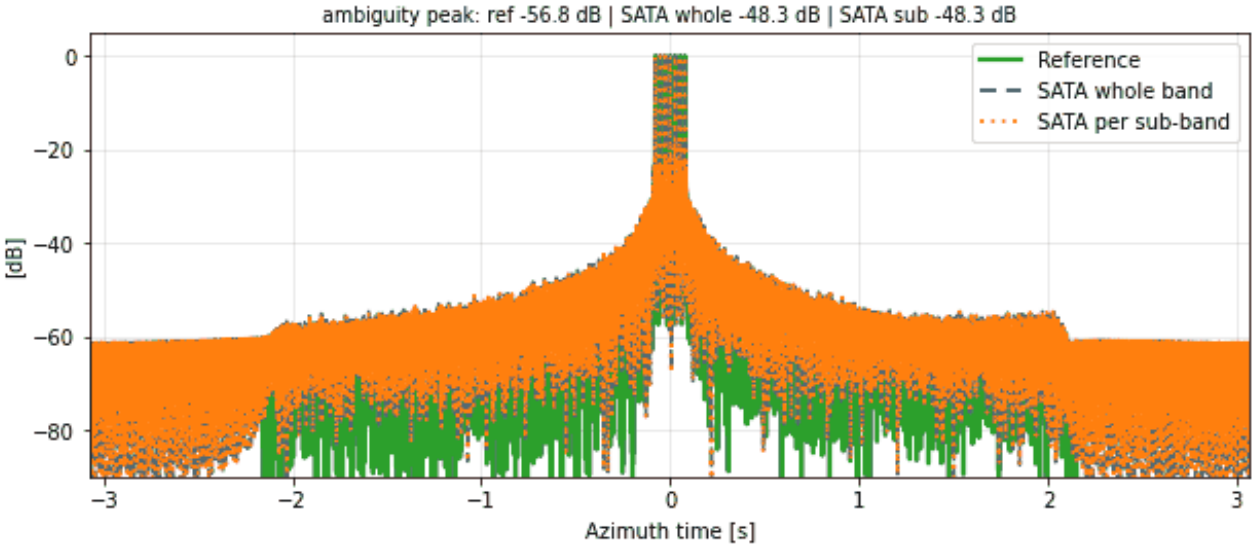





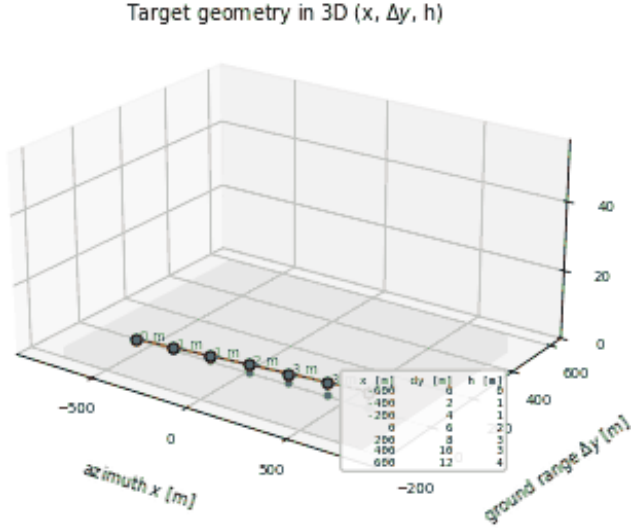

RA-SS-044 | SATA 1D | along-track ramp: N = 7, $\alpha = 3°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights


$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

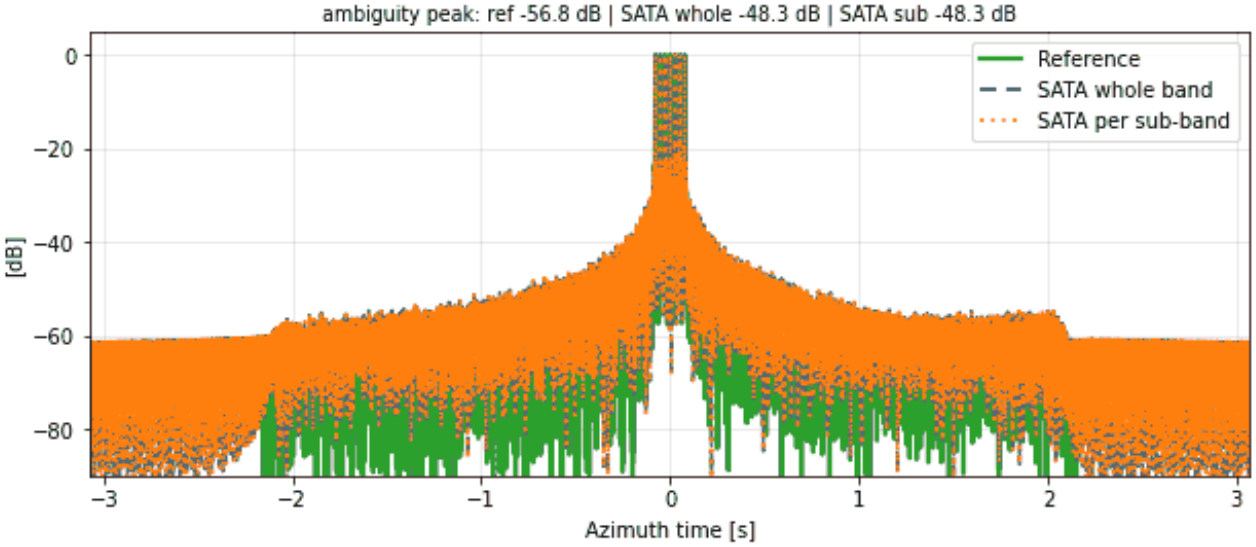

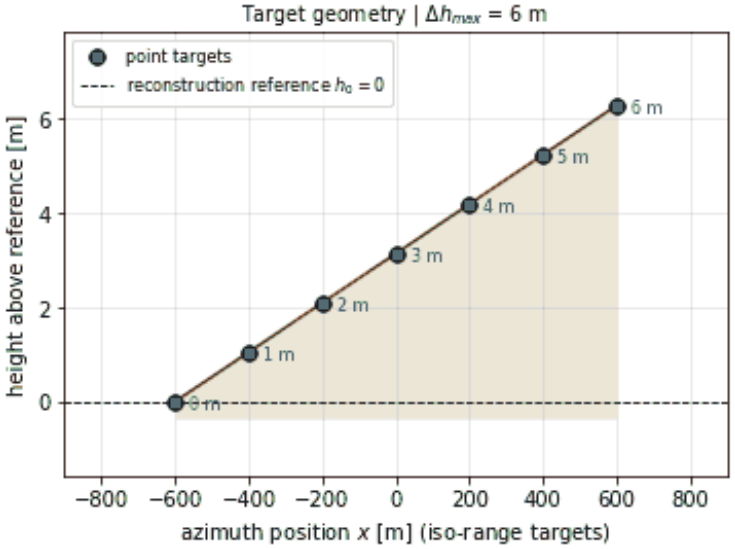





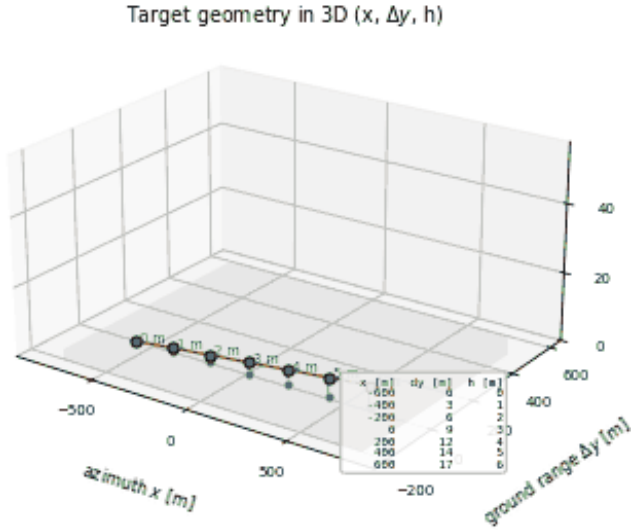



RA-SS-045 | SATA 1D | along-track ramp: N = 7, $\alpha = 4°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

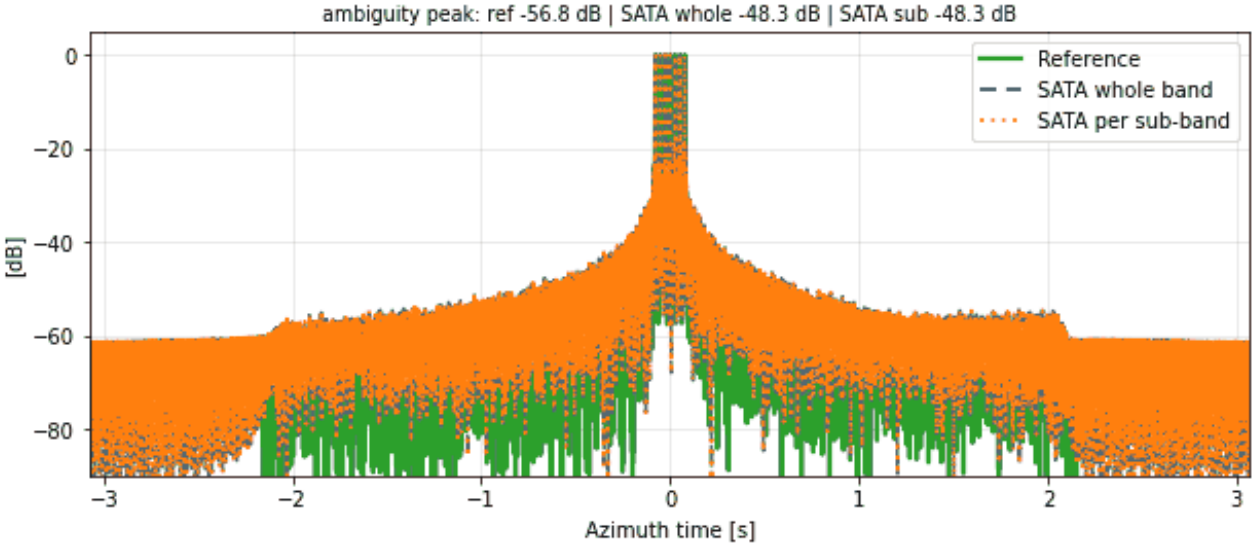

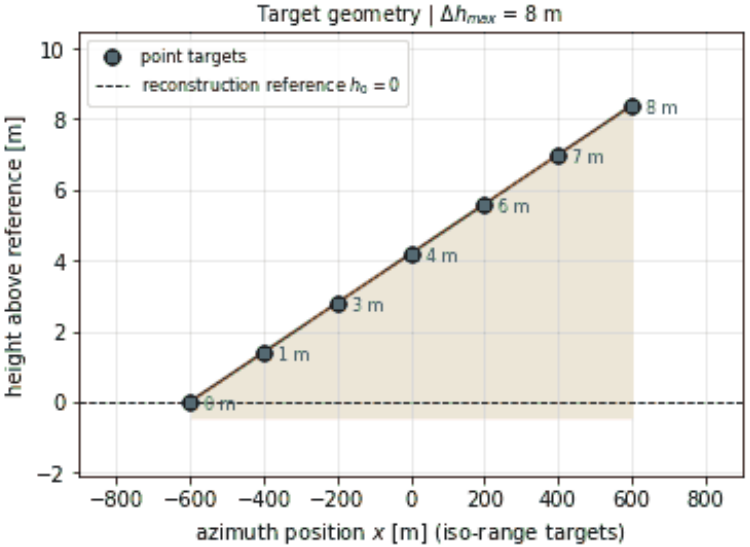


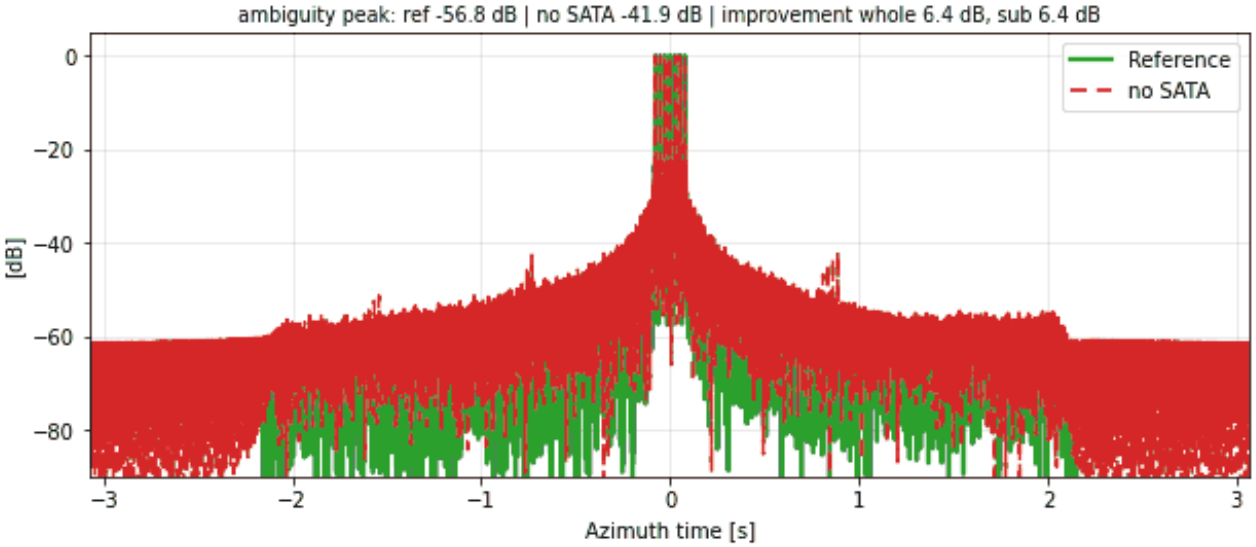
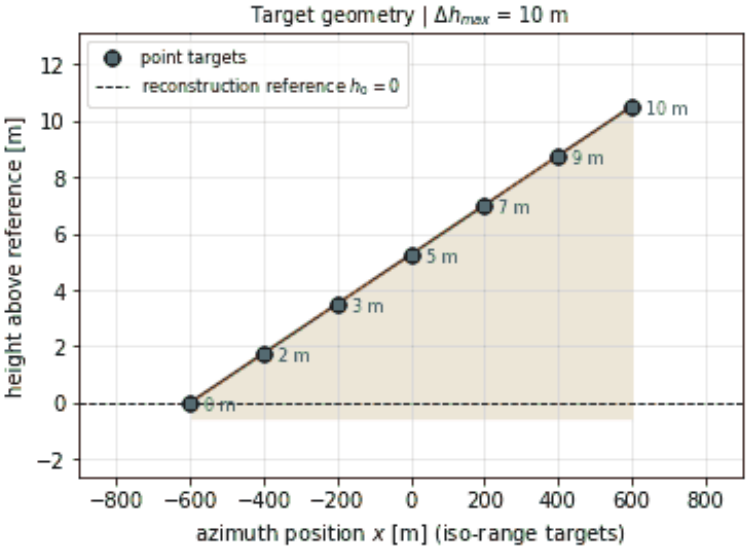


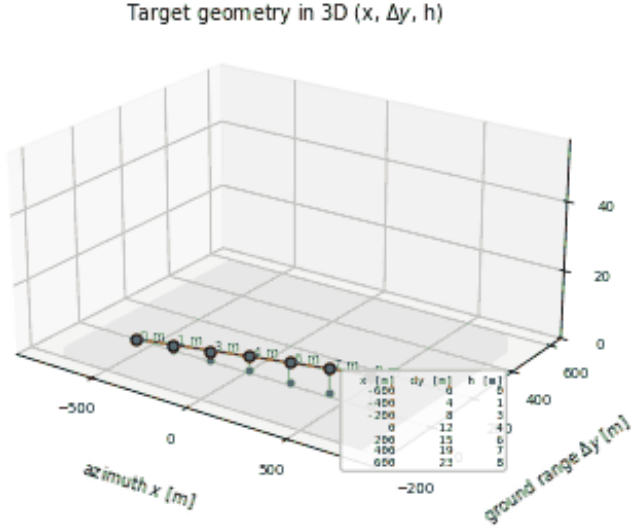
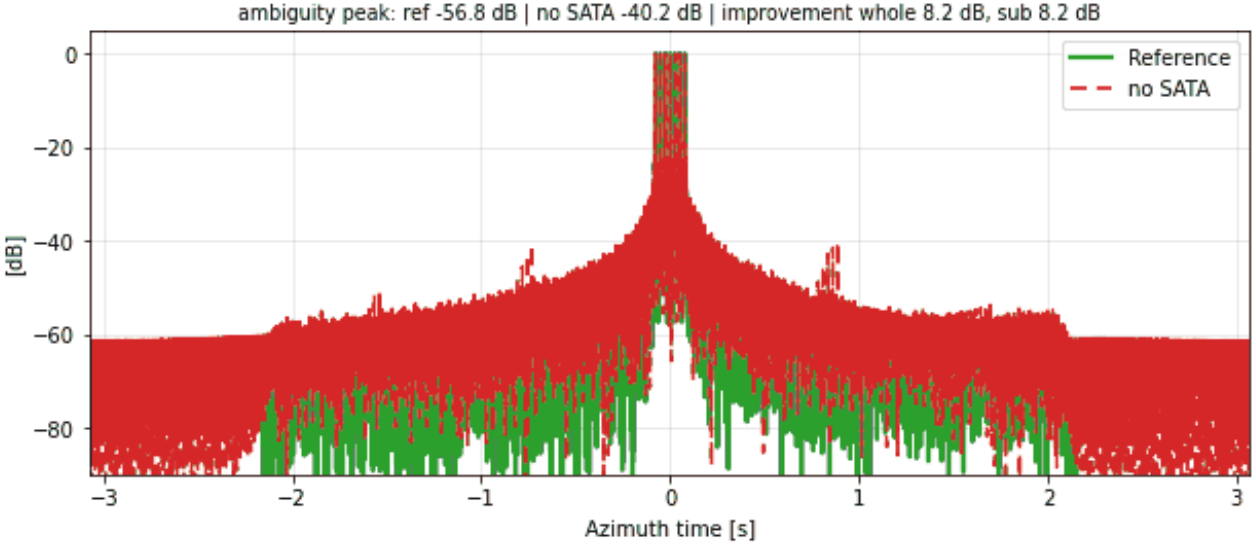



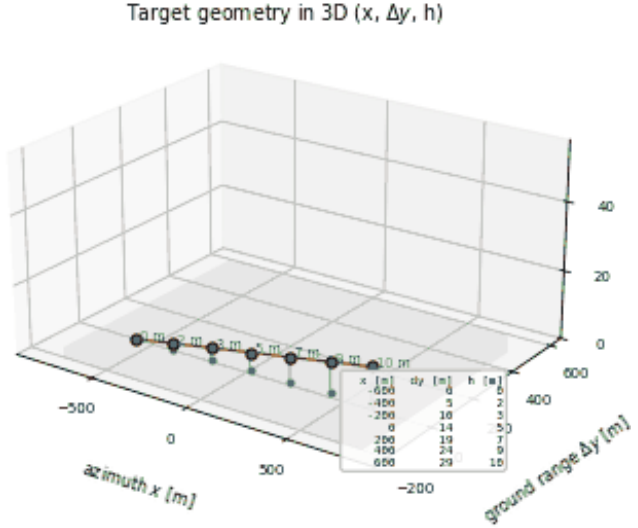
RA-SS-046 | SATA 1D | along-track ramp: N = 7, $\alpha = 5°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

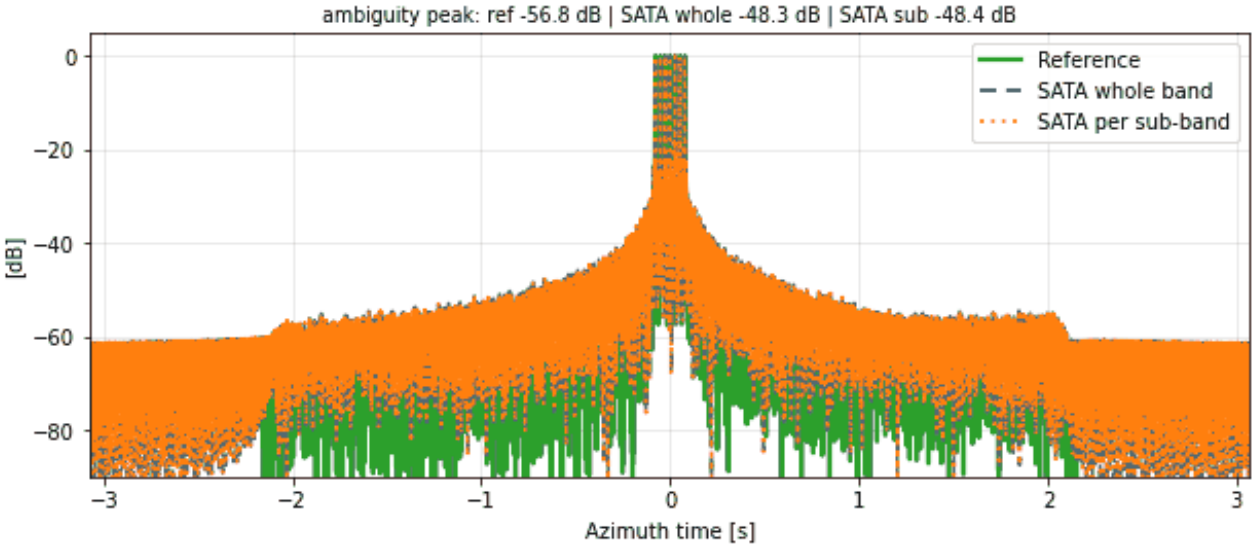





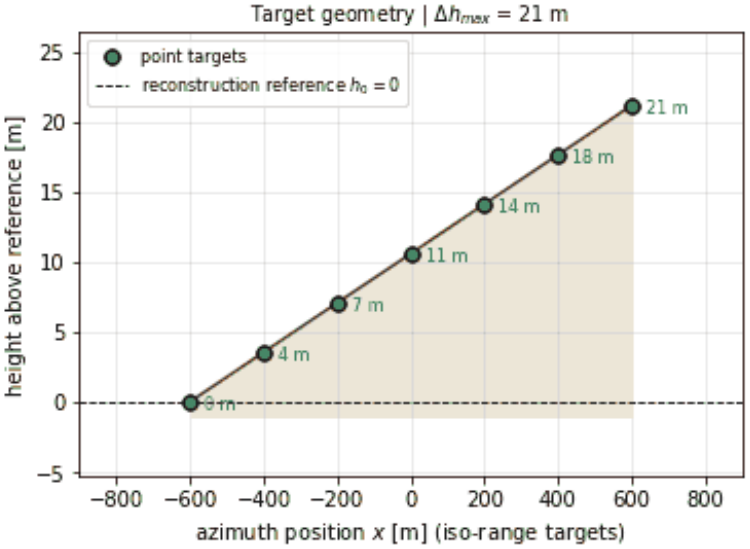



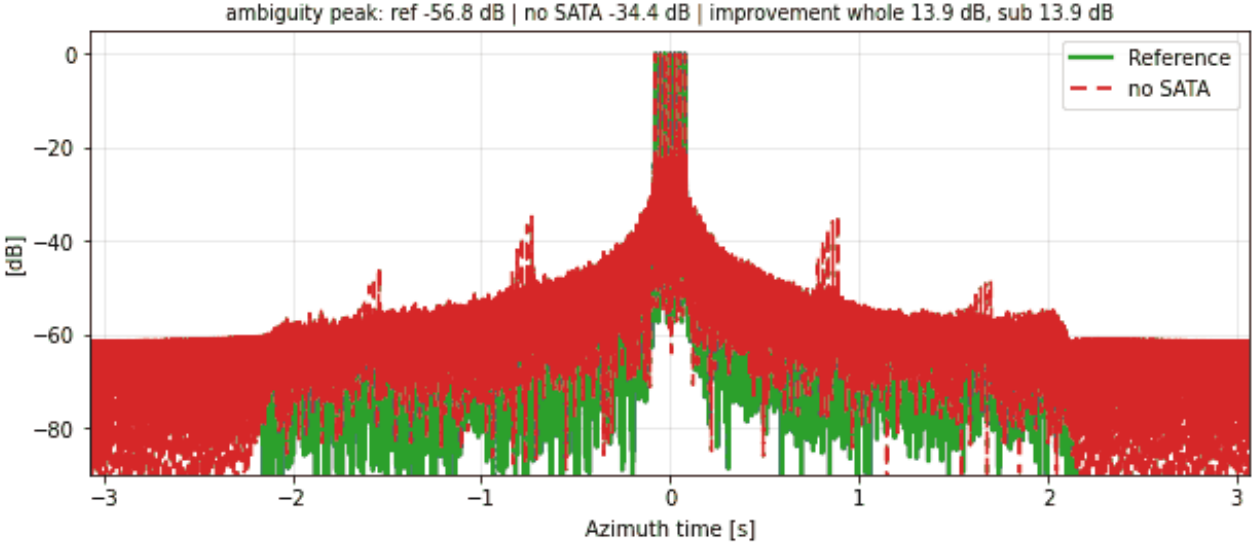



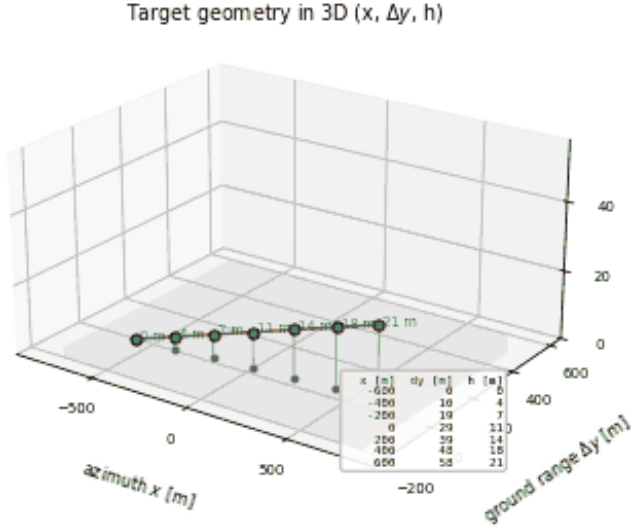
RA-SS-047 | SATA 1D | along-track ramp: N = 7, $\alpha = 10^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

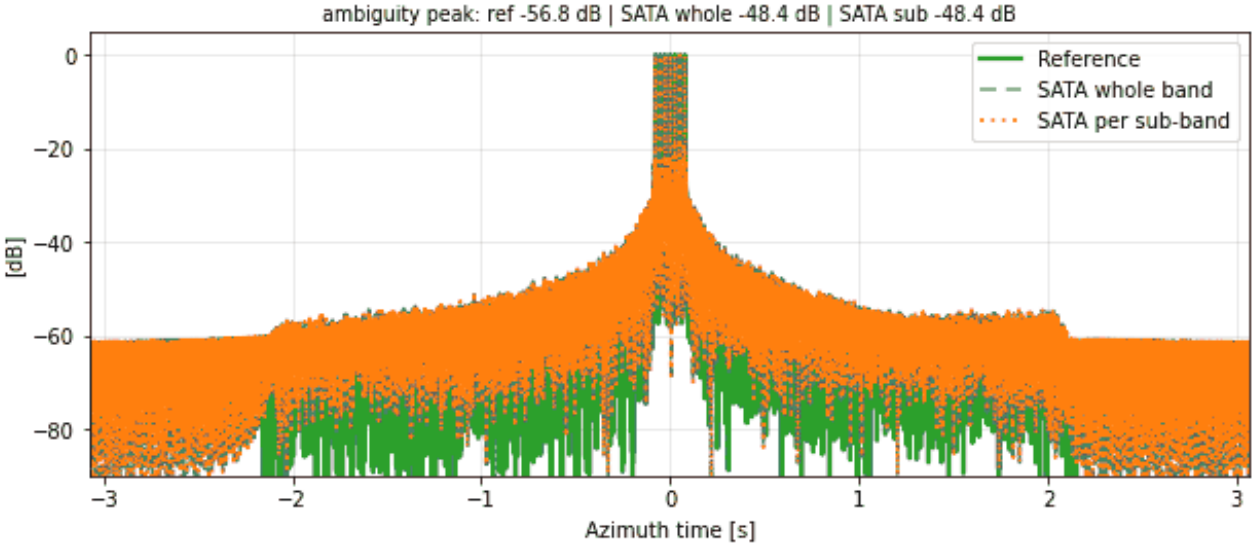





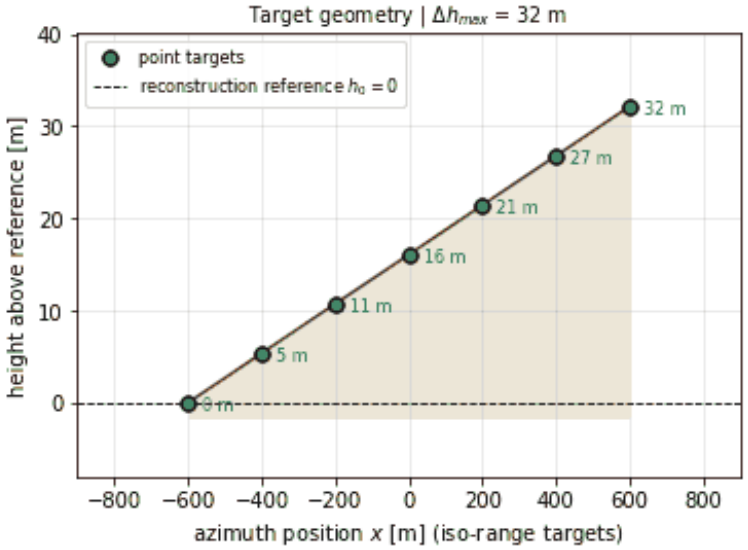



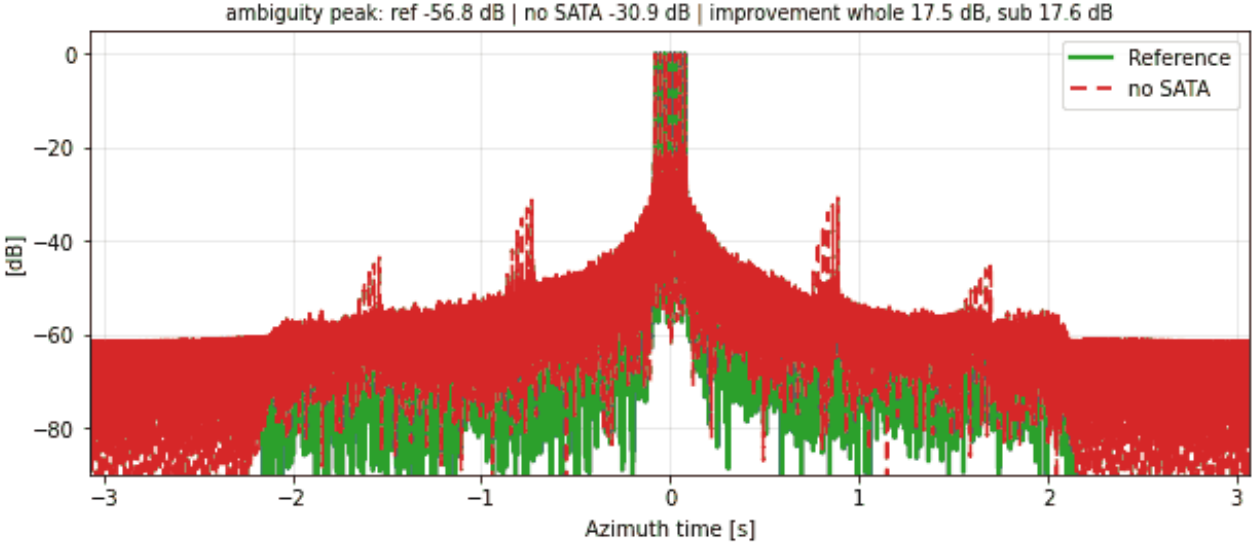



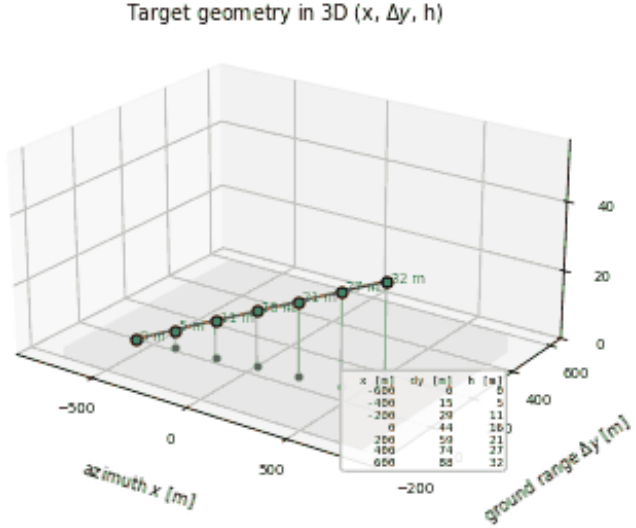
RA-SS-048 | SATA 1D | along-track ramp: N = 7, $\alpha = 15^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

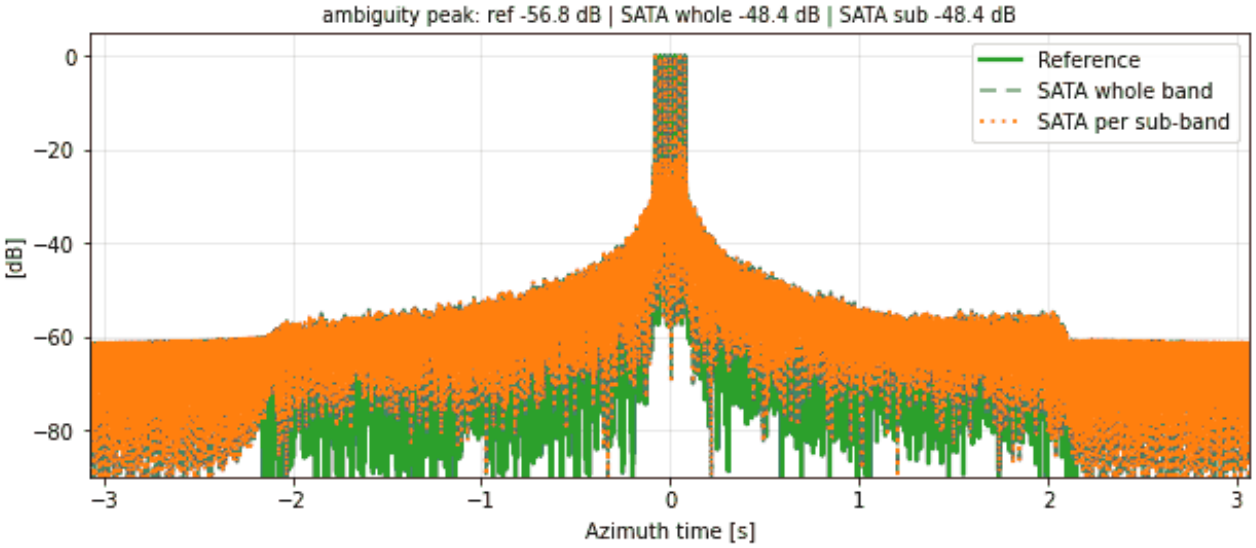





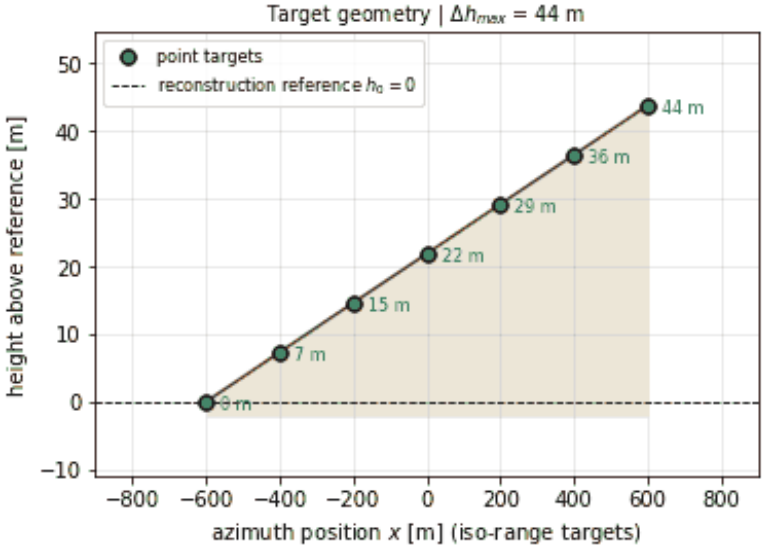



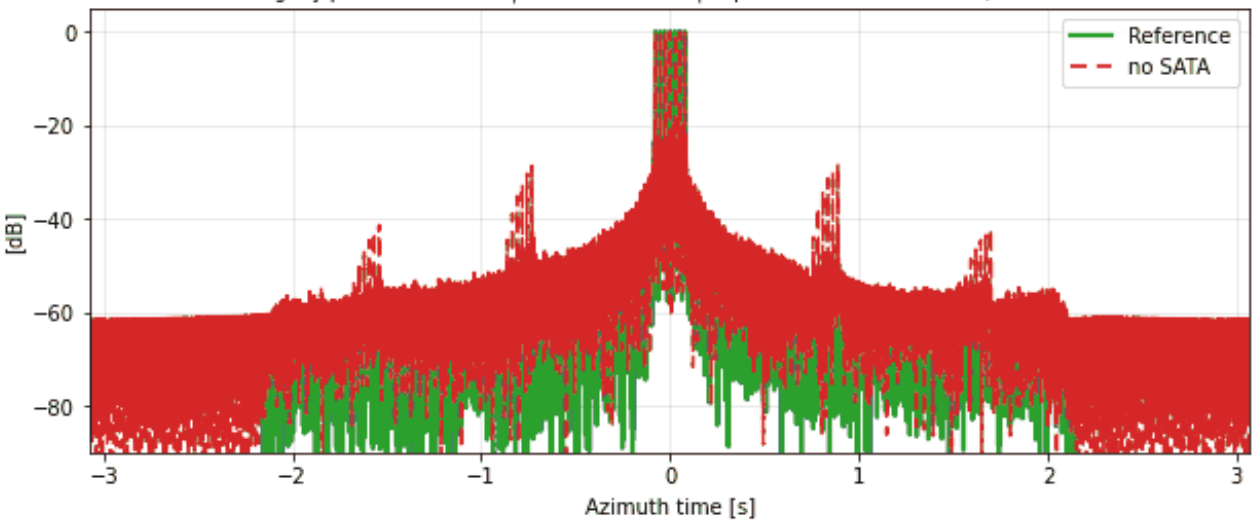



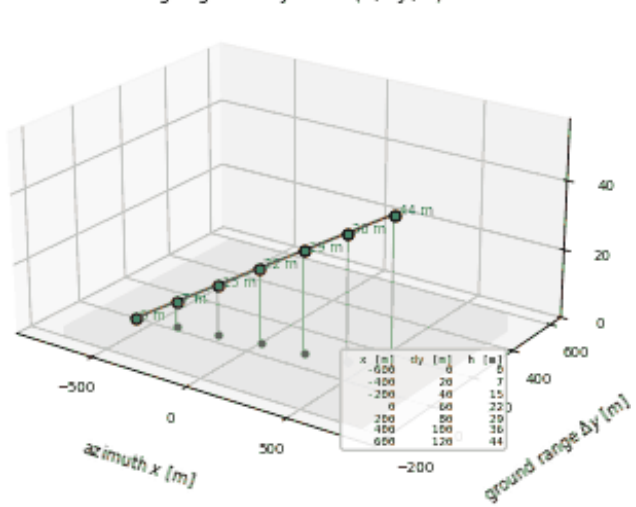
RA-SS-049 | SATA 1D | along-track ramp: N = 7, $\alpha = 20^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

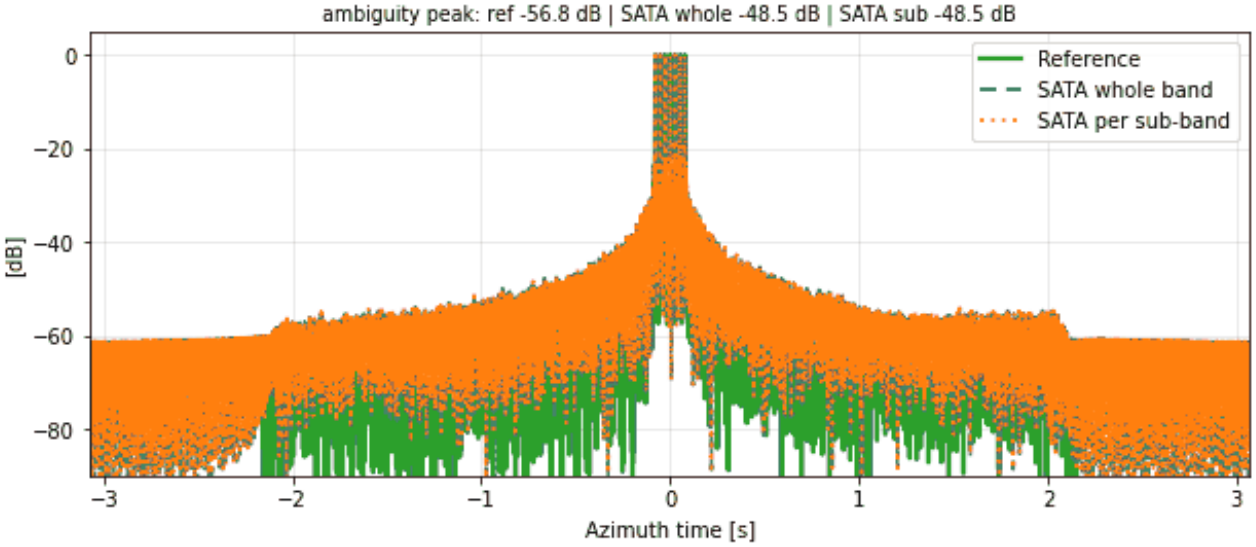





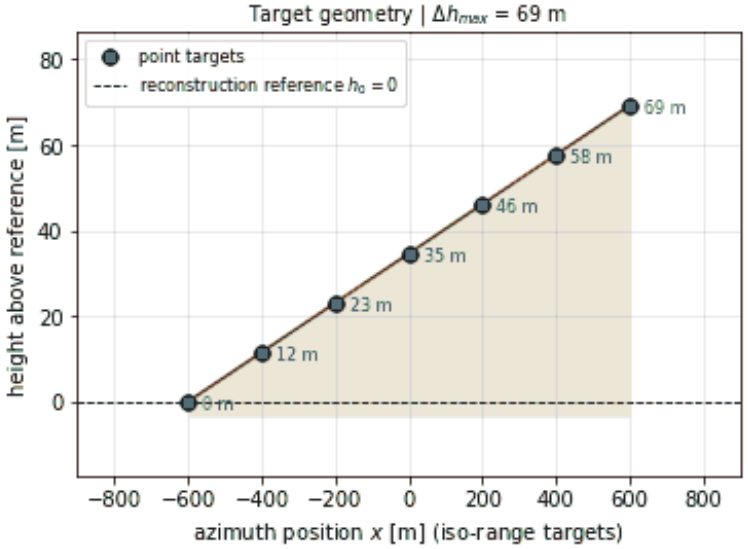



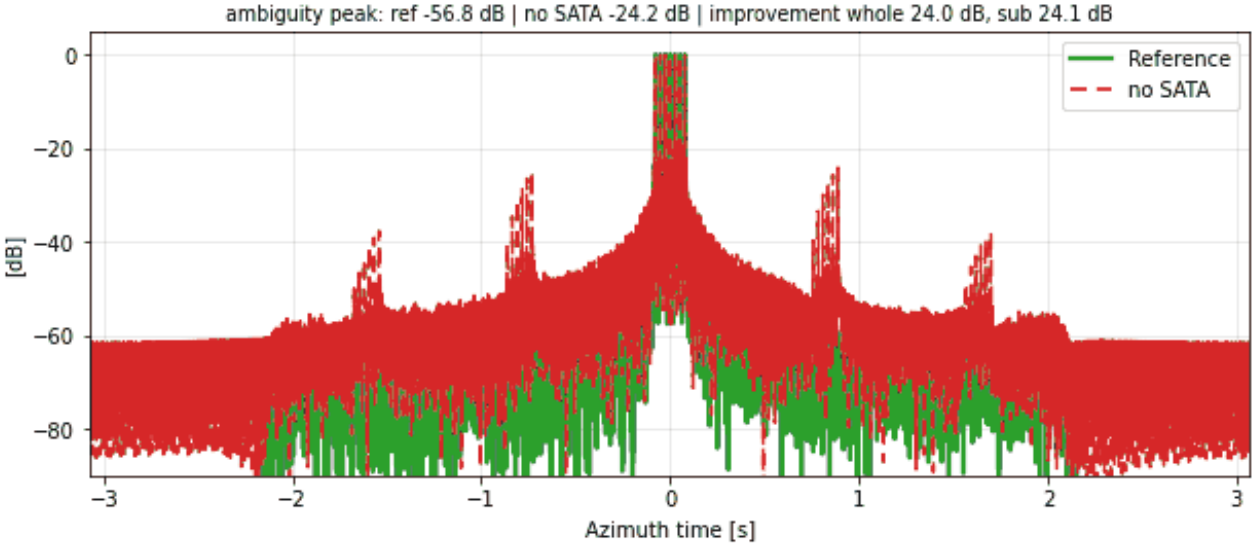



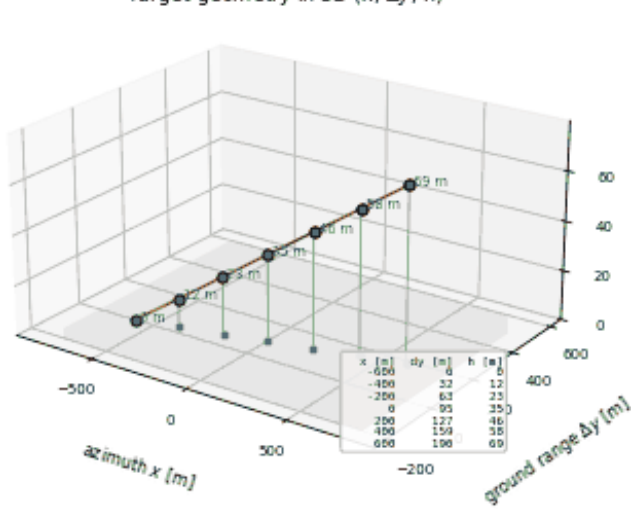
RA-SS-050 | SATA 1D | along-track ramp: N = 7, $\alpha = 30^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

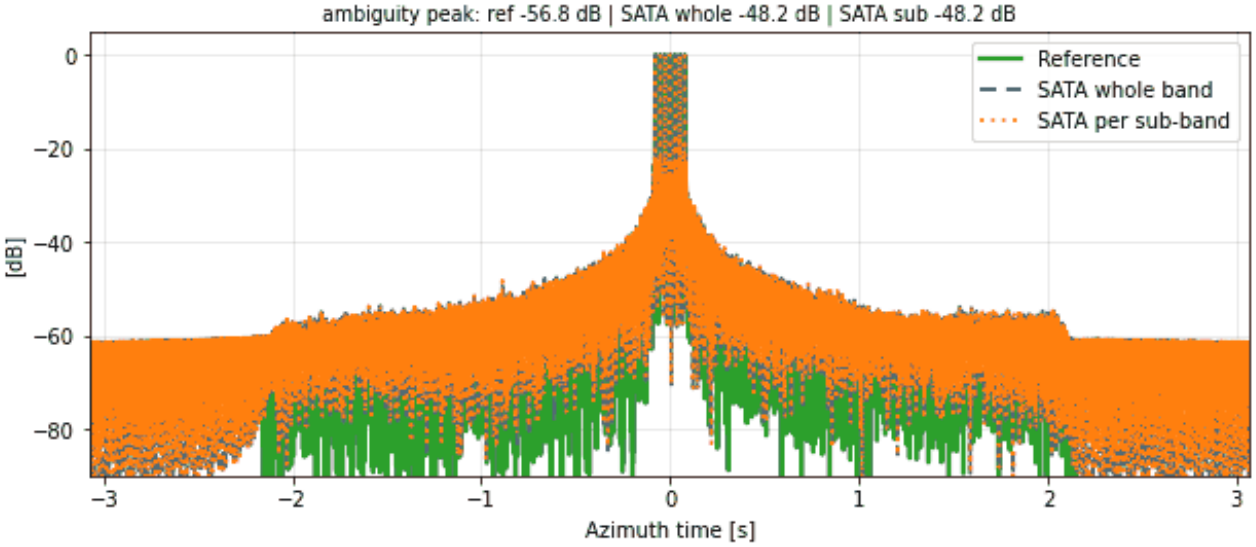





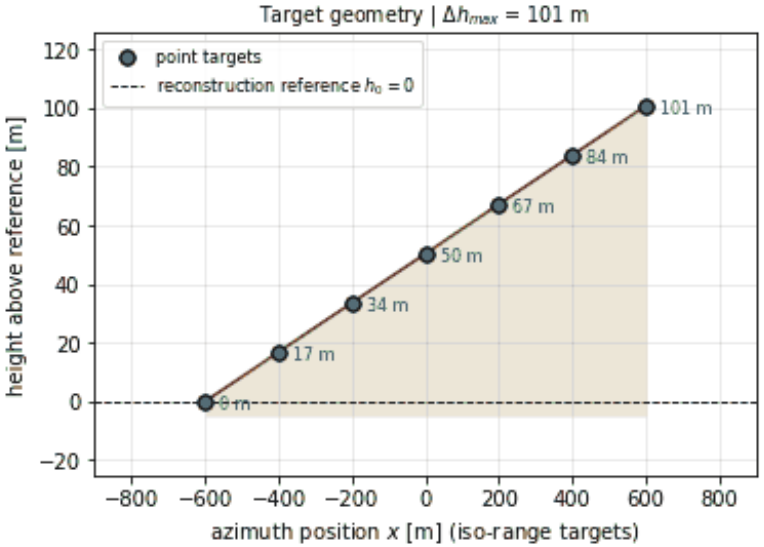



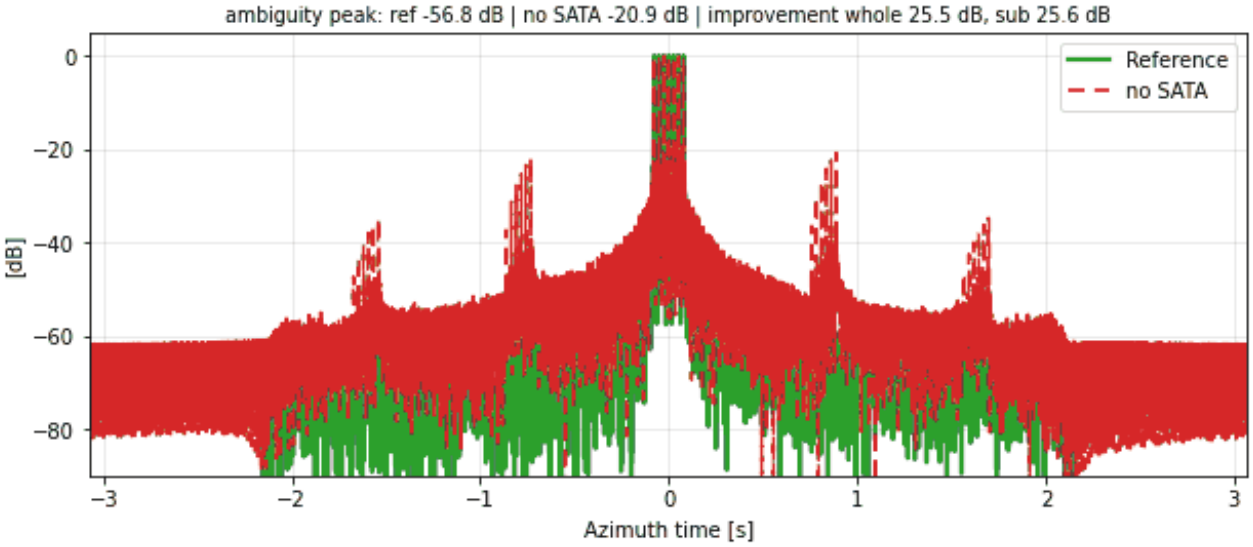



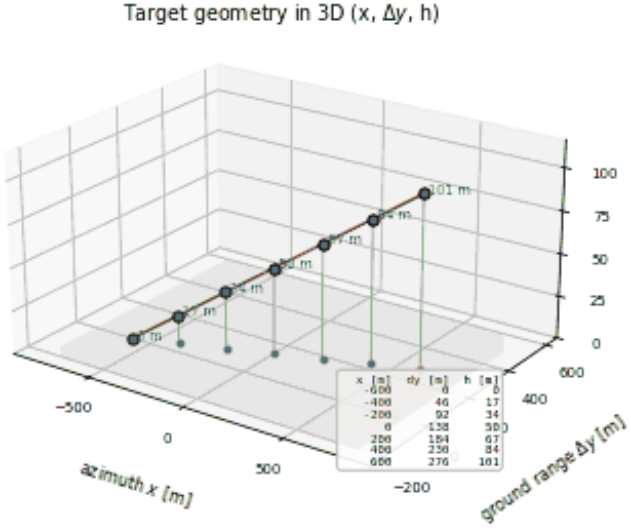
RA-SS-051 | SATA 1D | along-track ramp: N = 7, $\alpha = 40^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

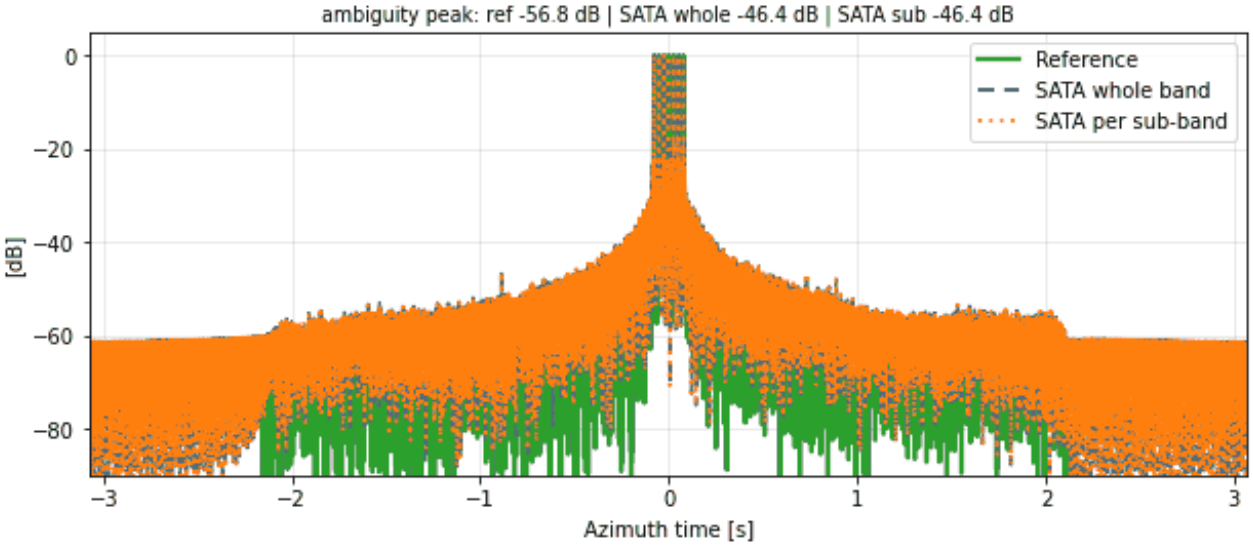





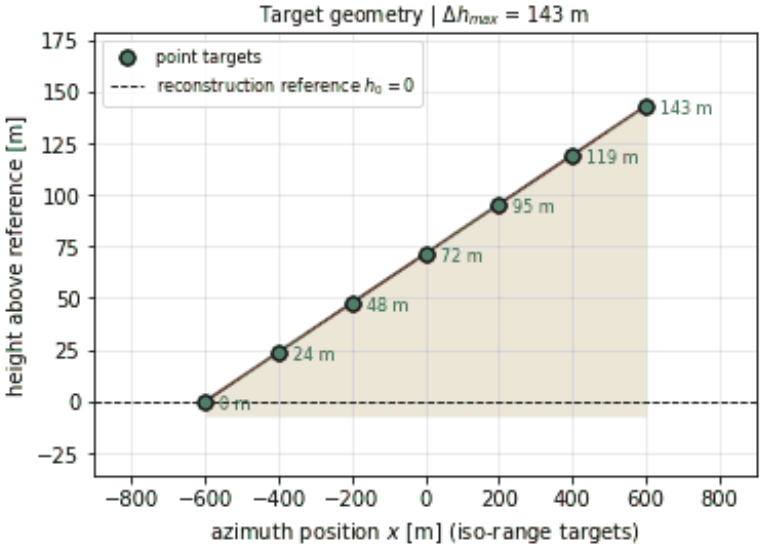



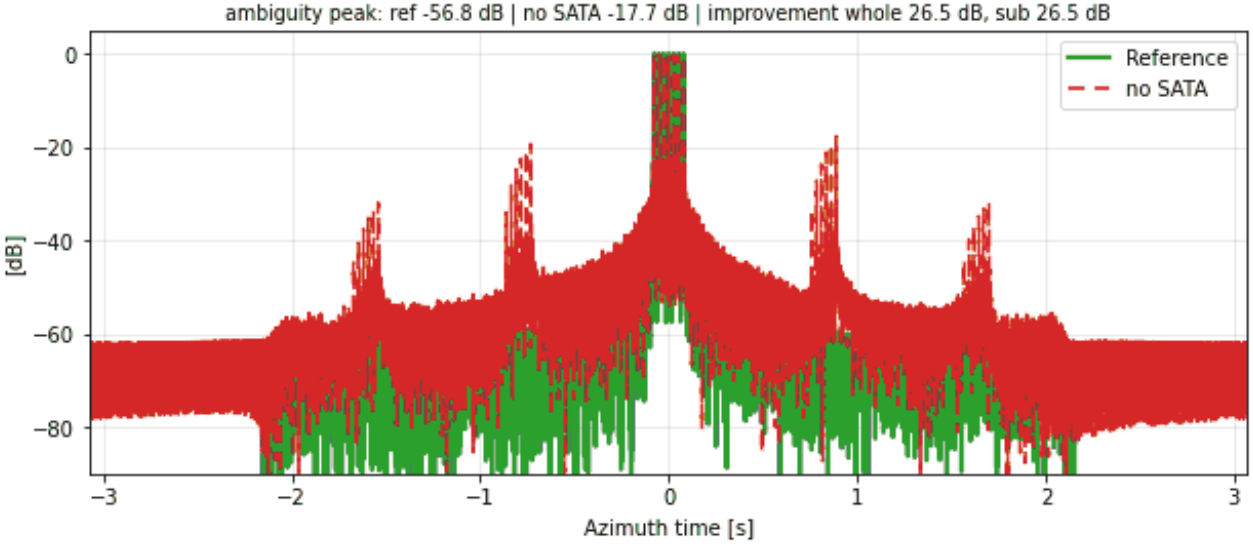



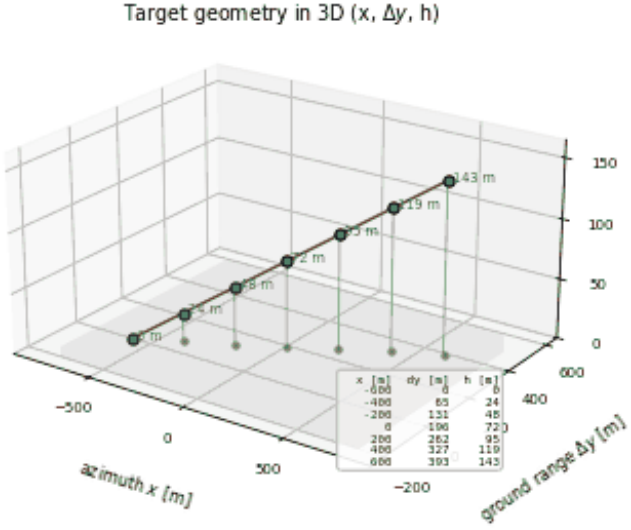
RA-SS-052 | SATA 1D | along-track ramp: N = 7, $\alpha = 50^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

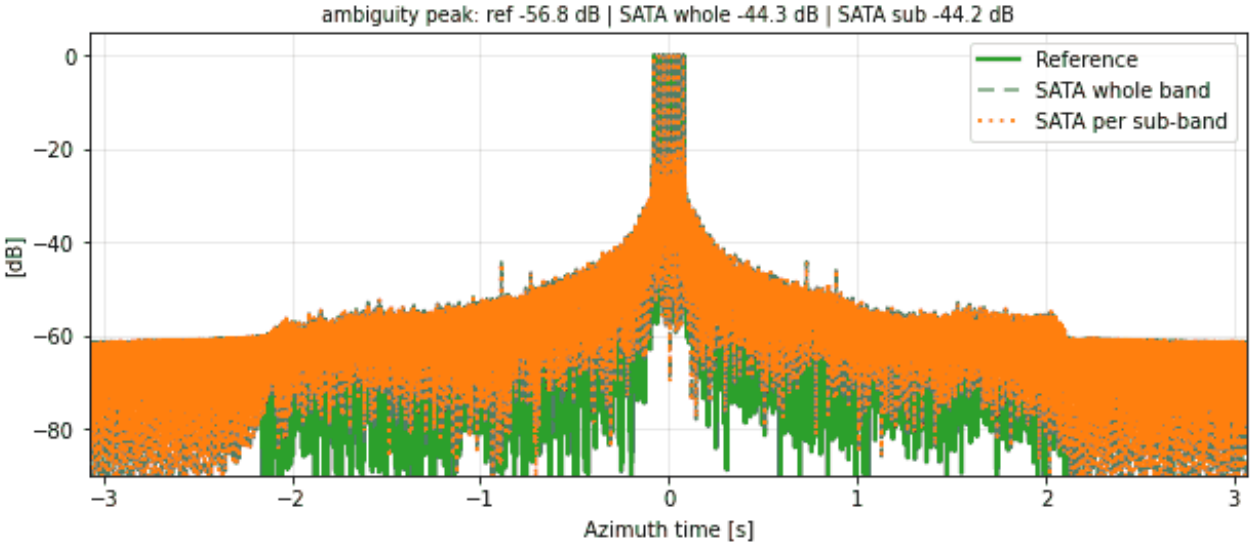





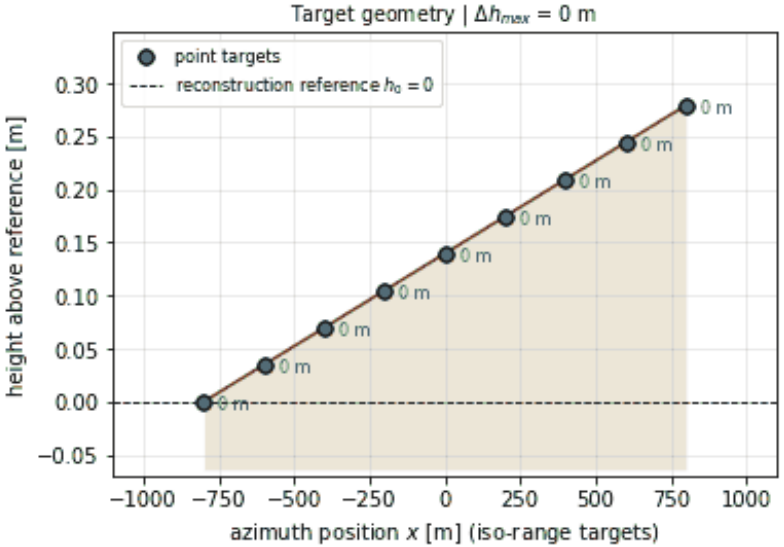



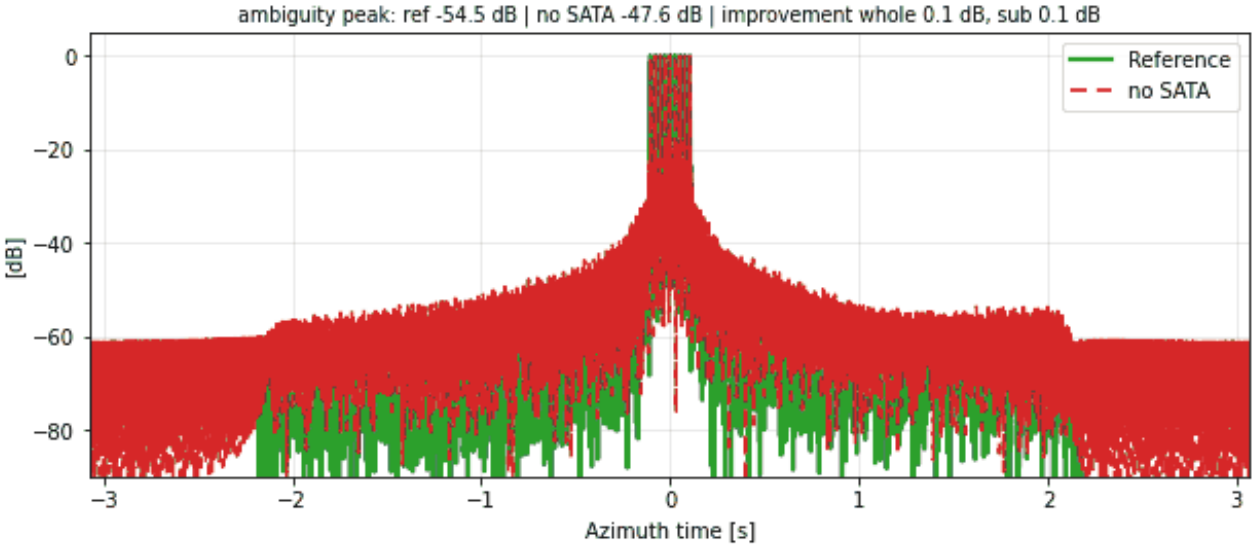



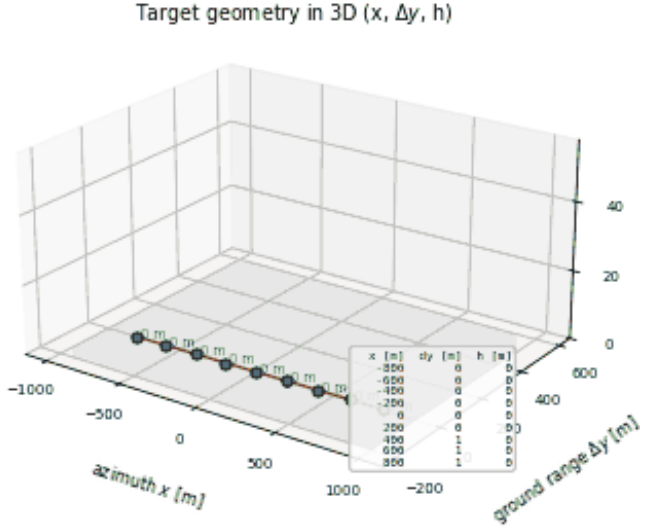
RA-SS-053 | SATA 1D | along-track ramp: N = 9, $\alpha = 0.1°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

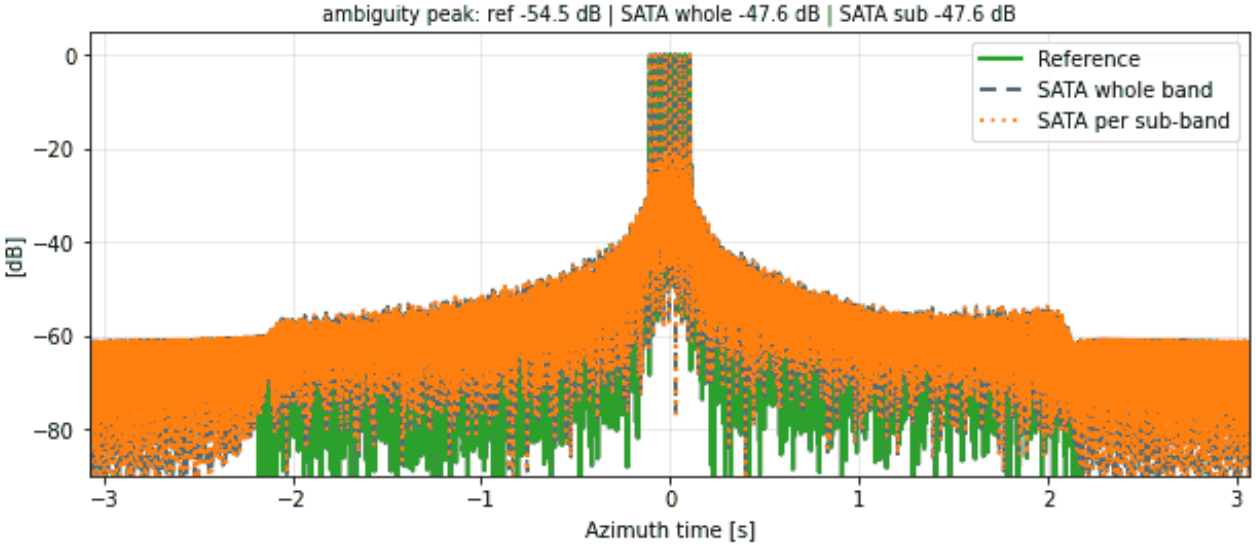





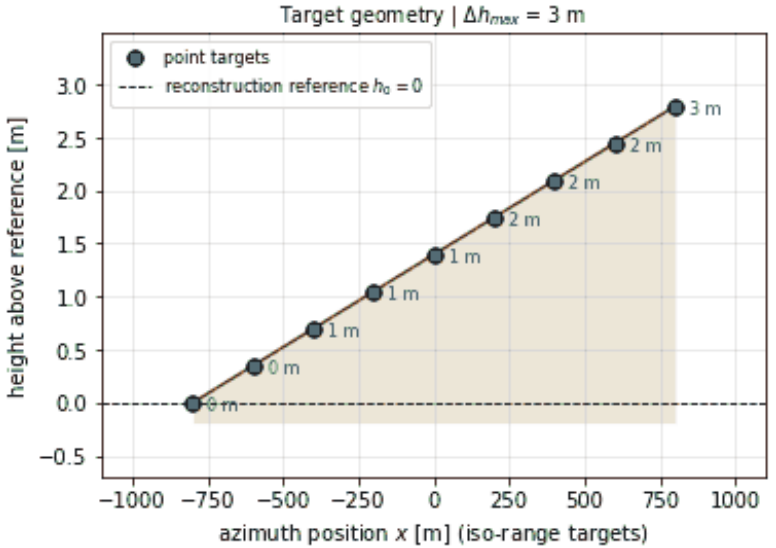



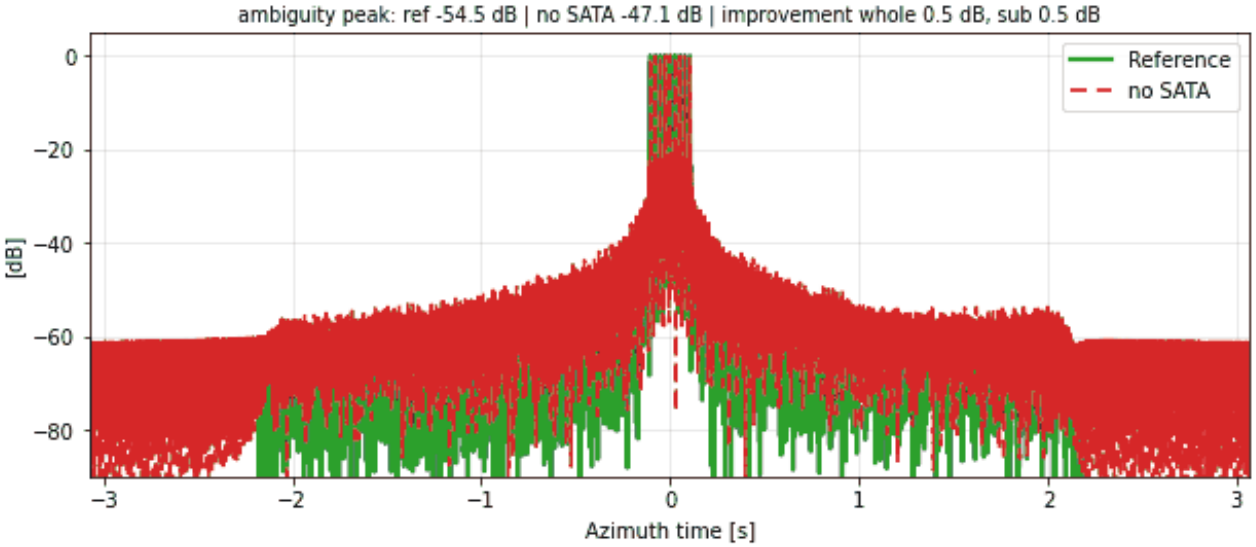



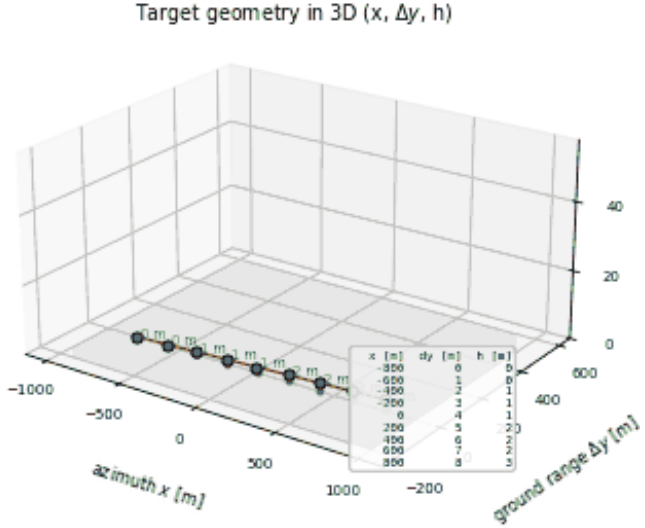
RA-SS-054 | SATA 1D | along-track ramp: N = 9, $\alpha = 1°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

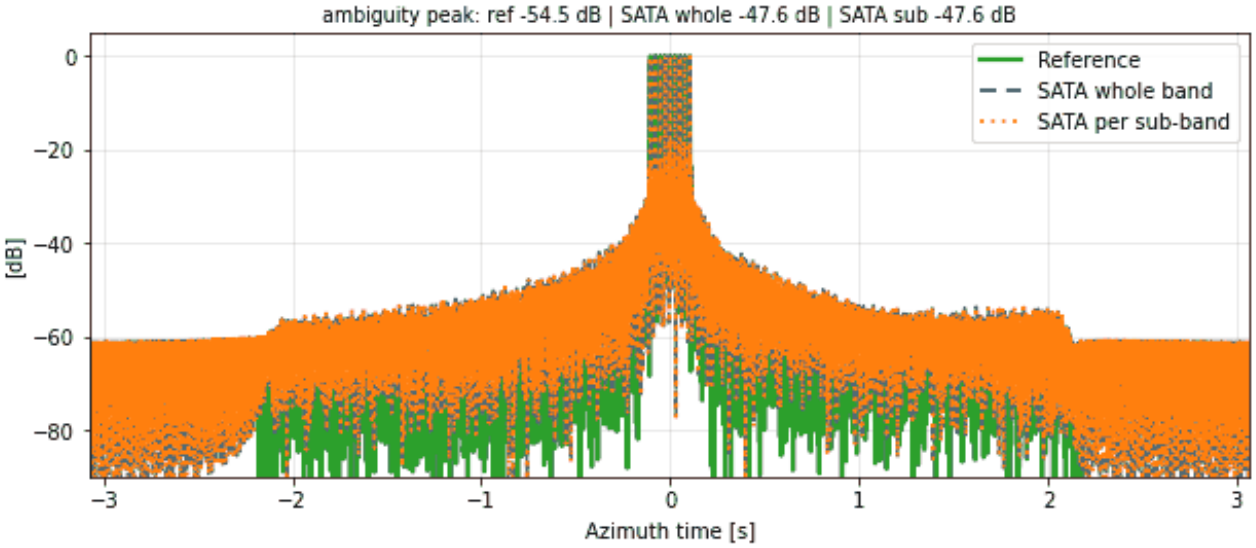





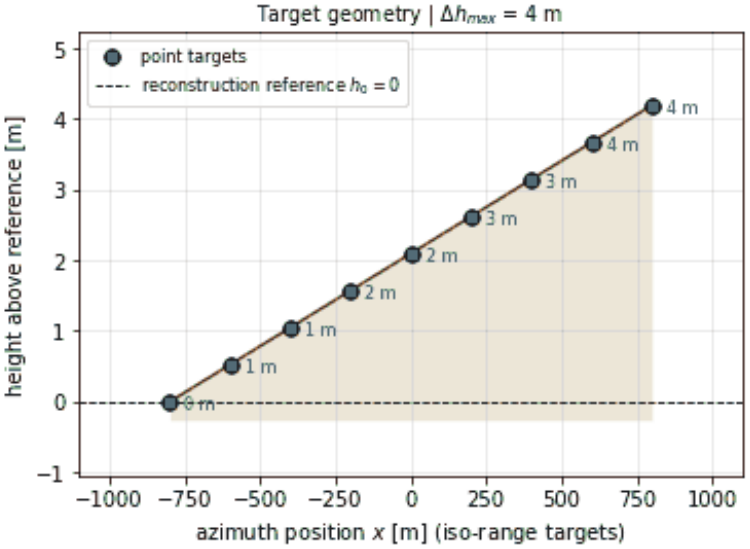



RA-SS-055 | SATA 1D | along-track ramp: N = 9, $\alpha = 1.5°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights


$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



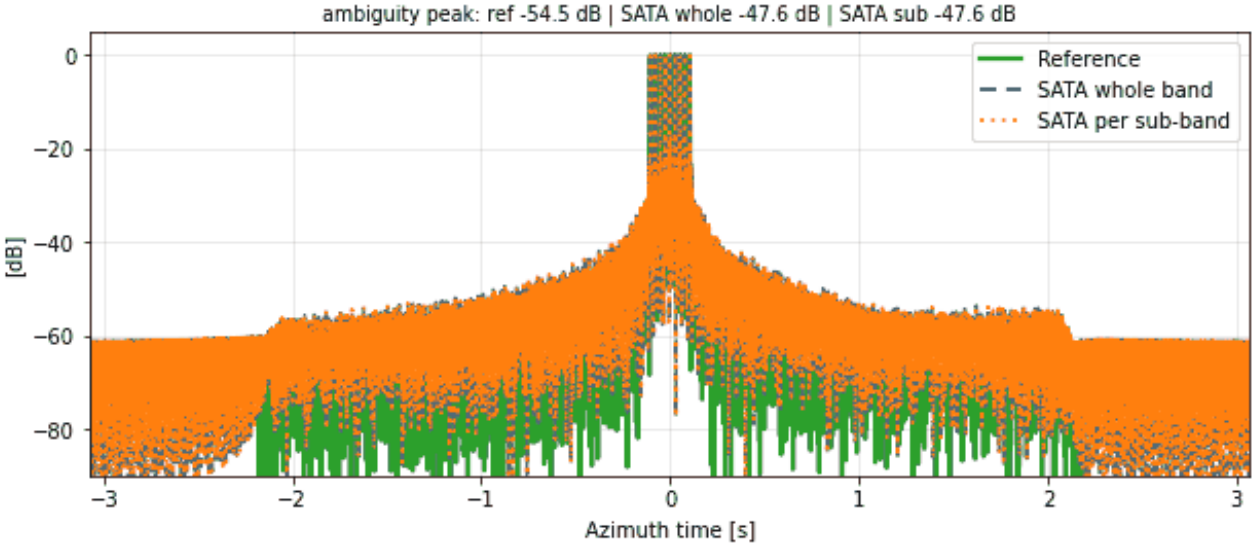



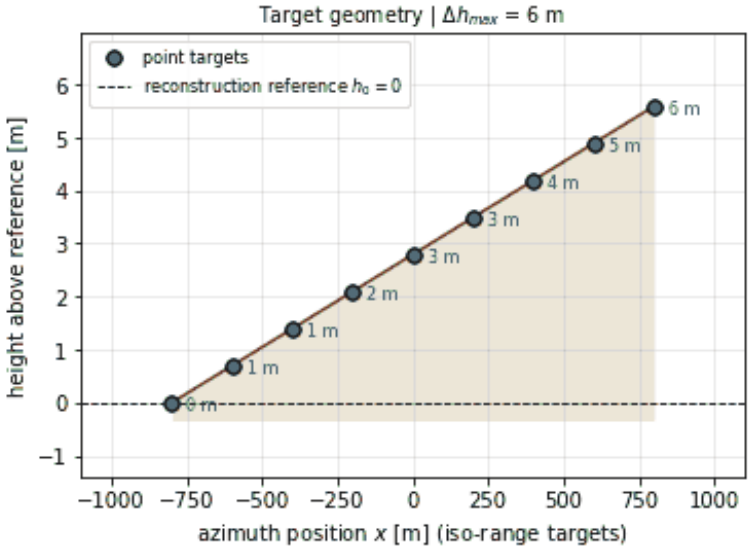




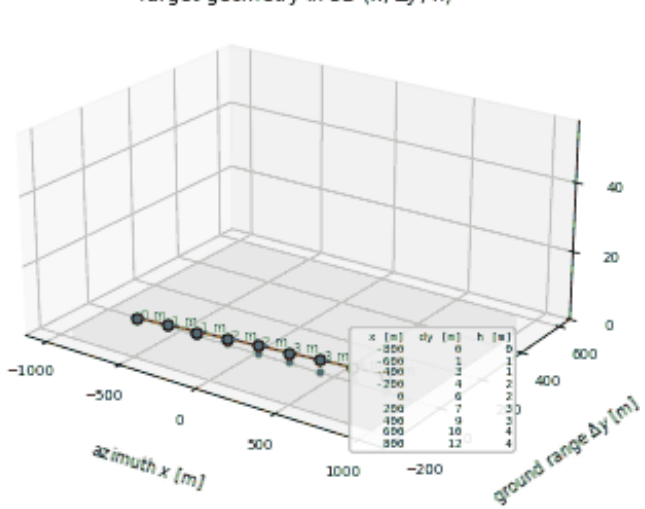


RA-SS-056 | SATA 1D | along-track ramp: N = 9, $\alpha = 2^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

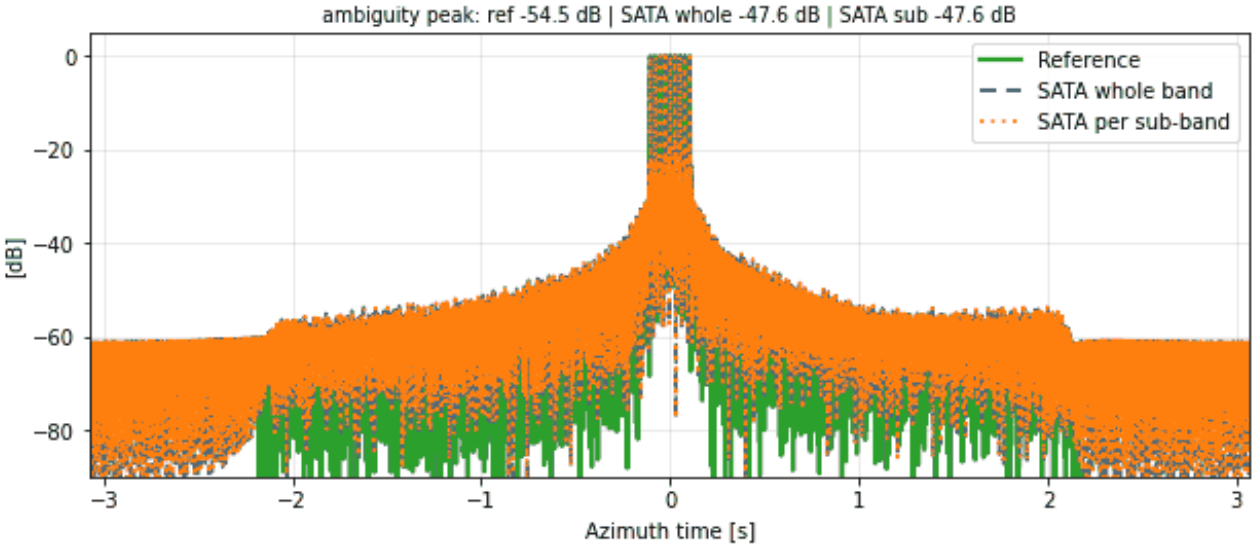







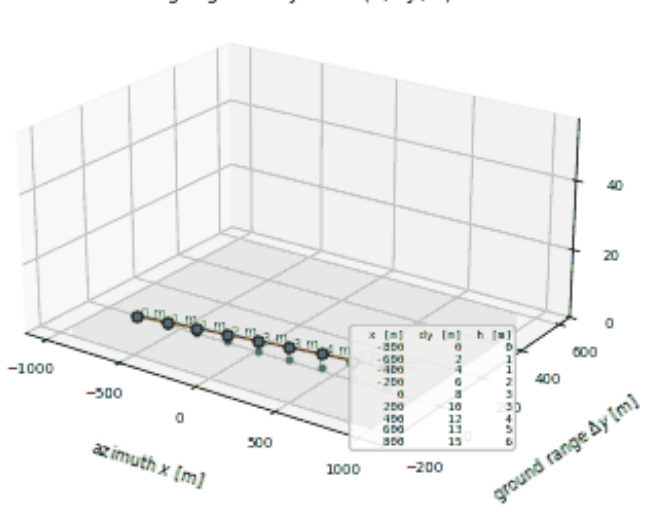

RA-SS-057 | SATA 1D | along-track ramp: N = 9, $\alpha = 3°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights


$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

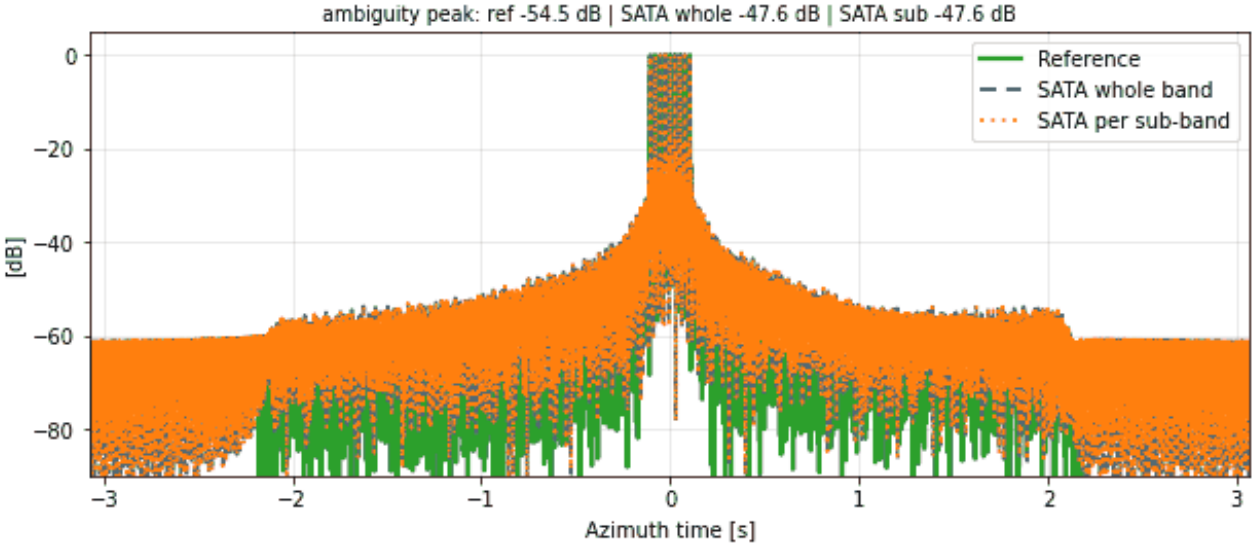

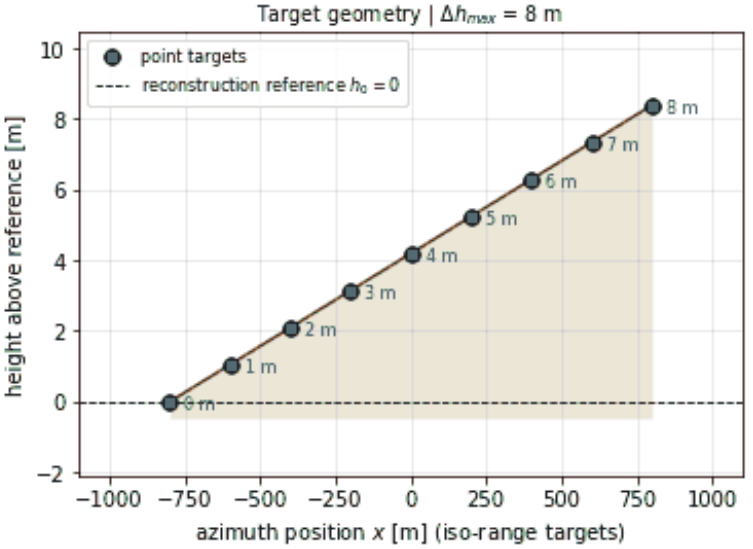





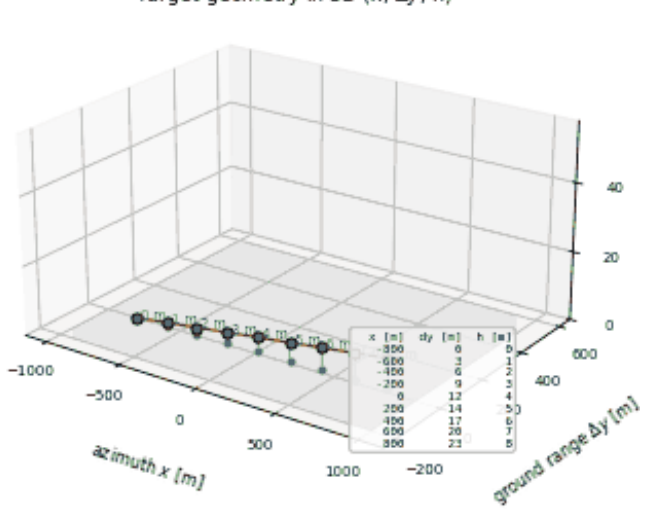

RA-SS-058 | SATA 1D | along-track ramp: N = 9, $\alpha = 4°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights


$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

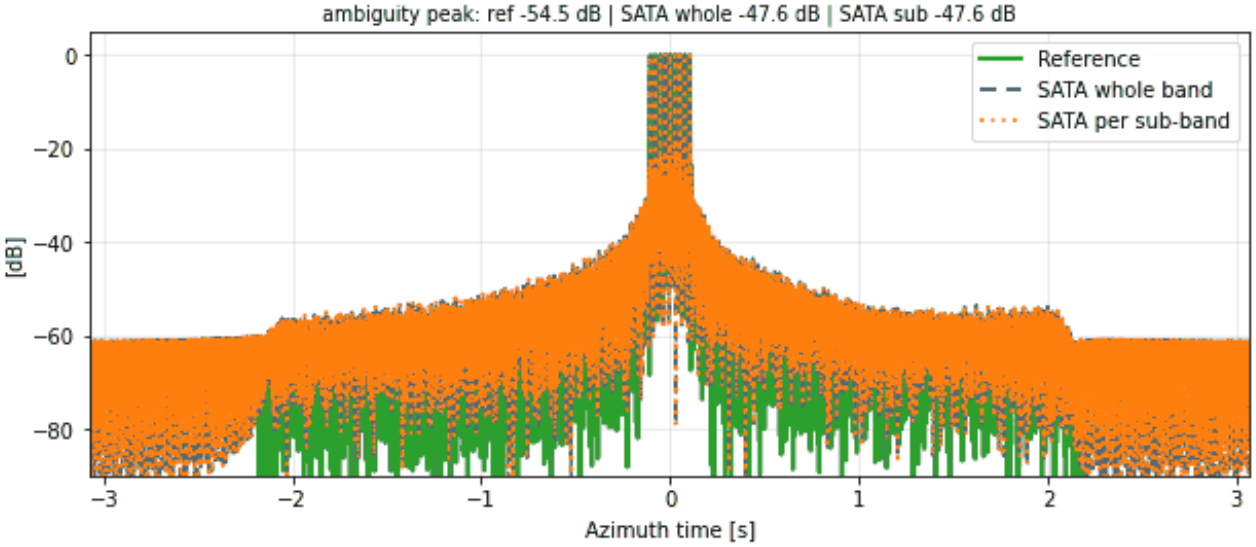

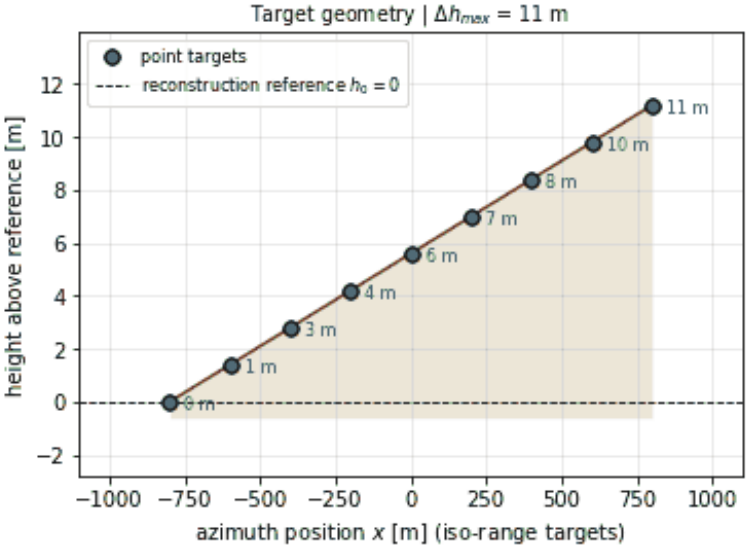





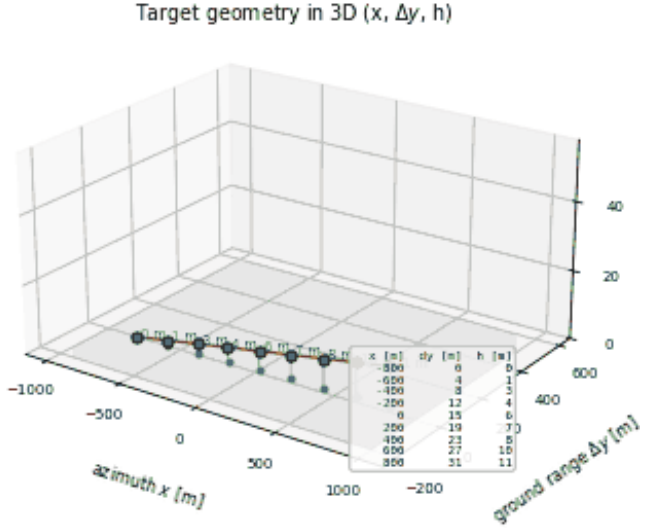



RA-SS-059 | SATA 1D | along-track ramp: N = 9, $\alpha = 5^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

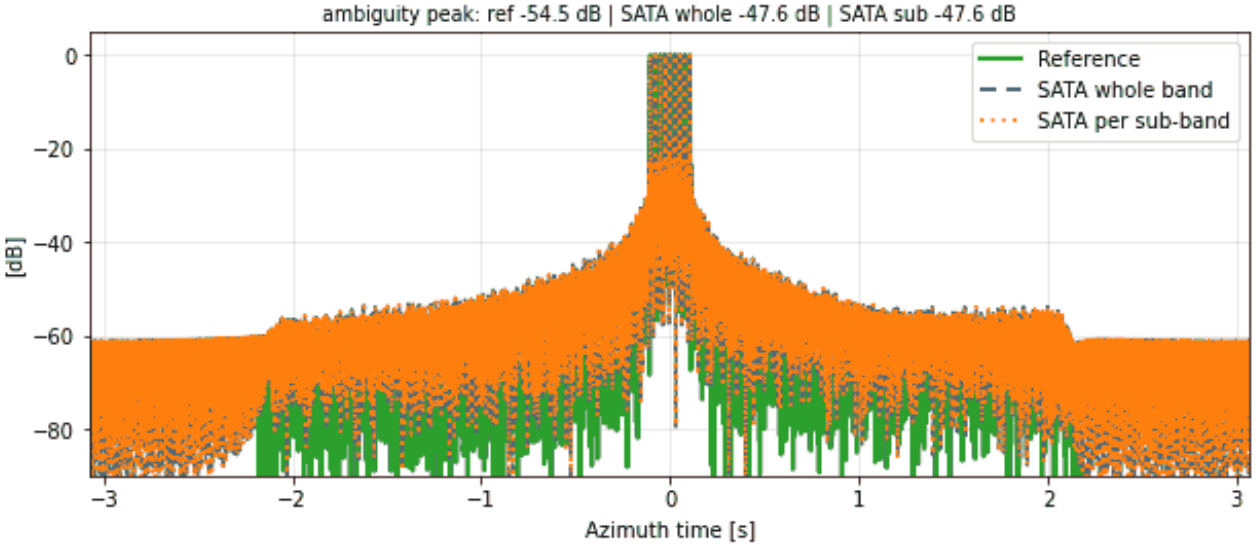

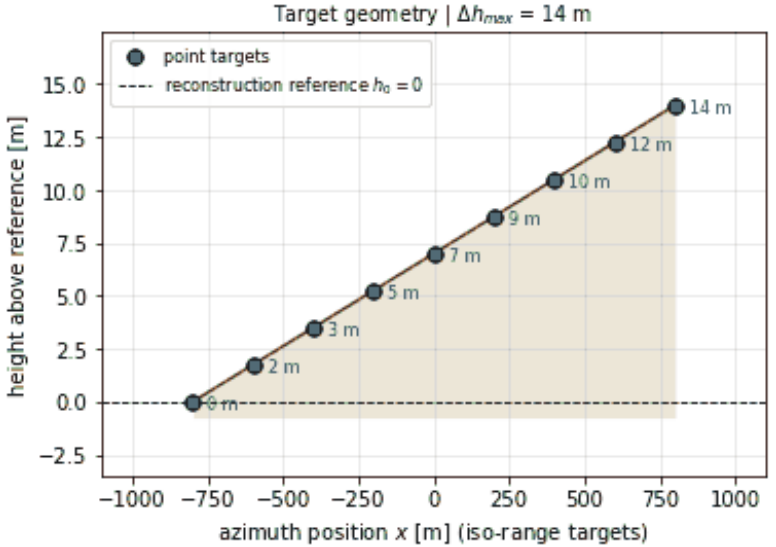


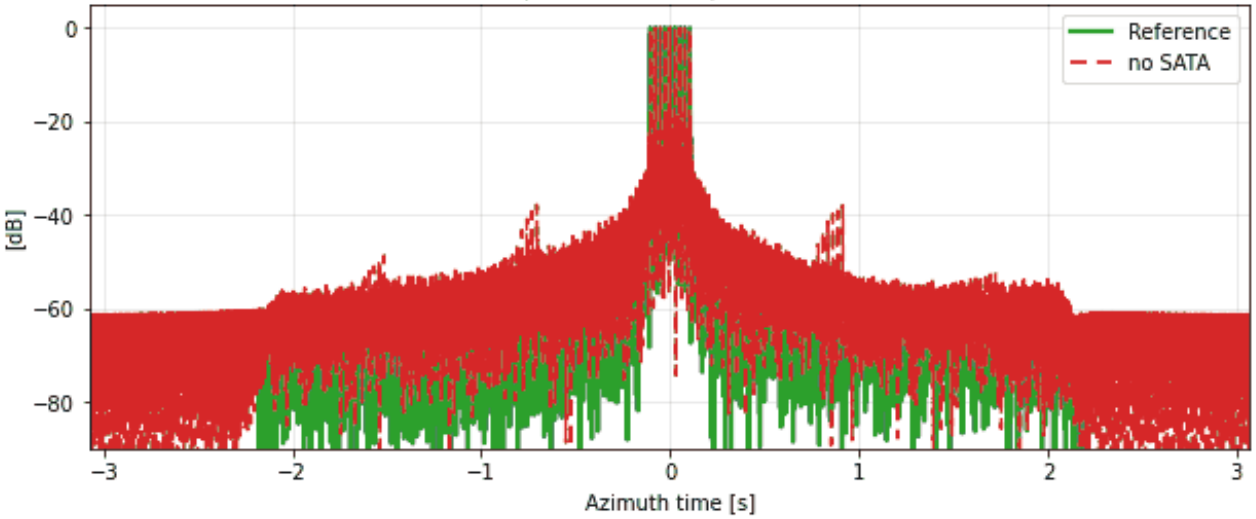
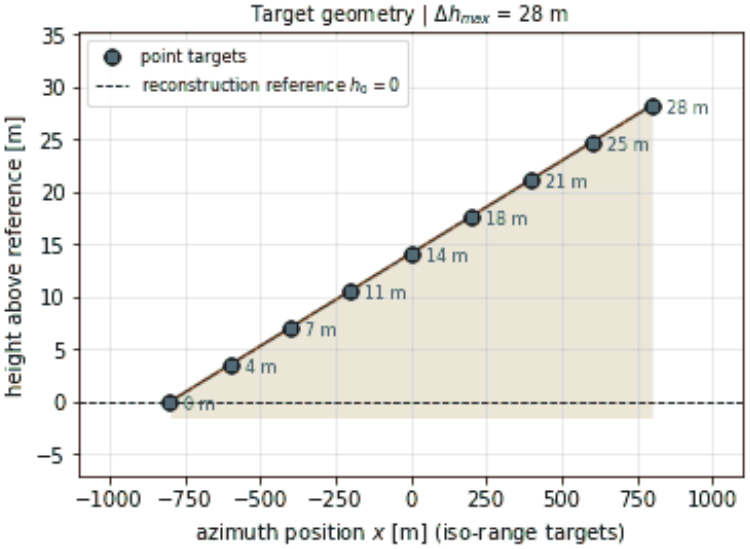


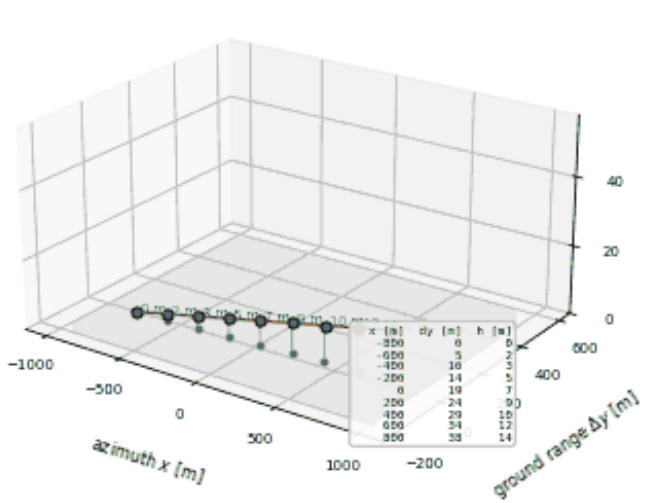
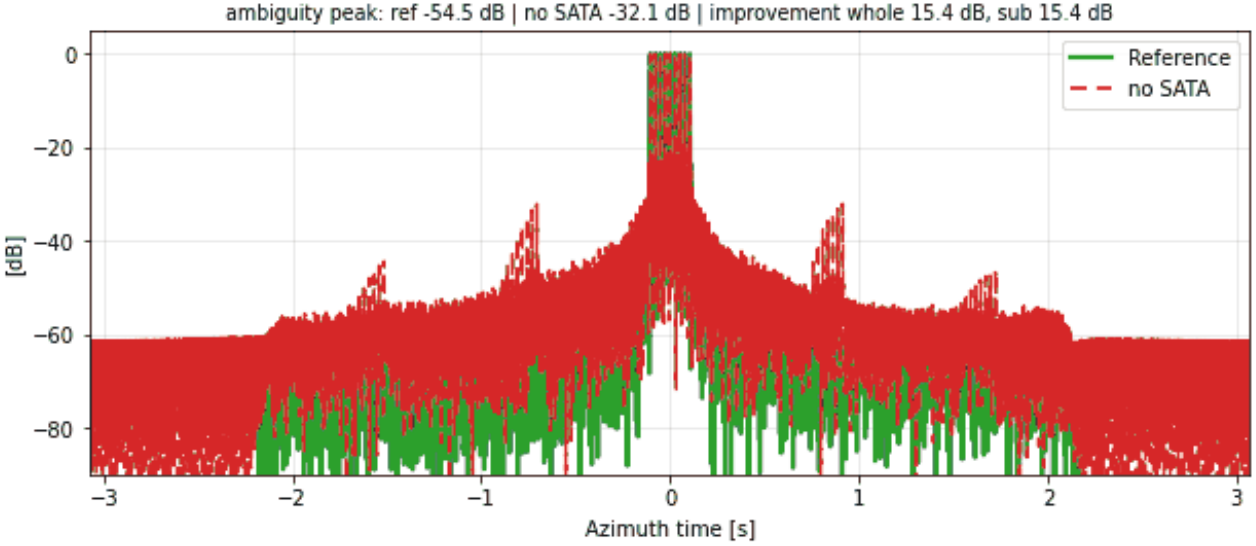



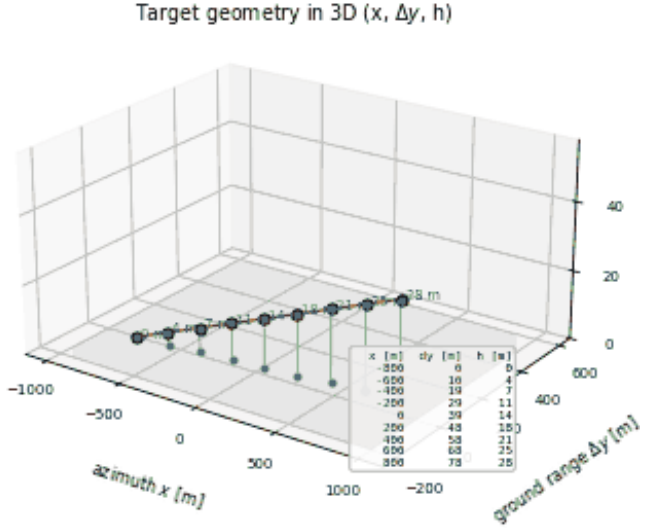
RA-SS-060 | SATA 1D | along-track ramp: N = 9, $\alpha = 10^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

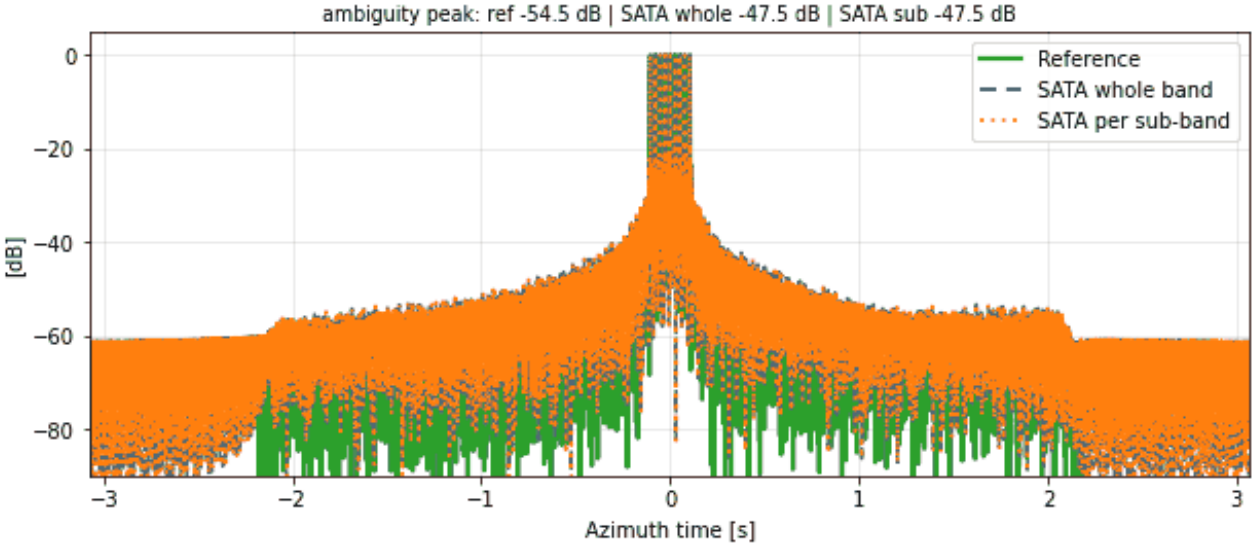





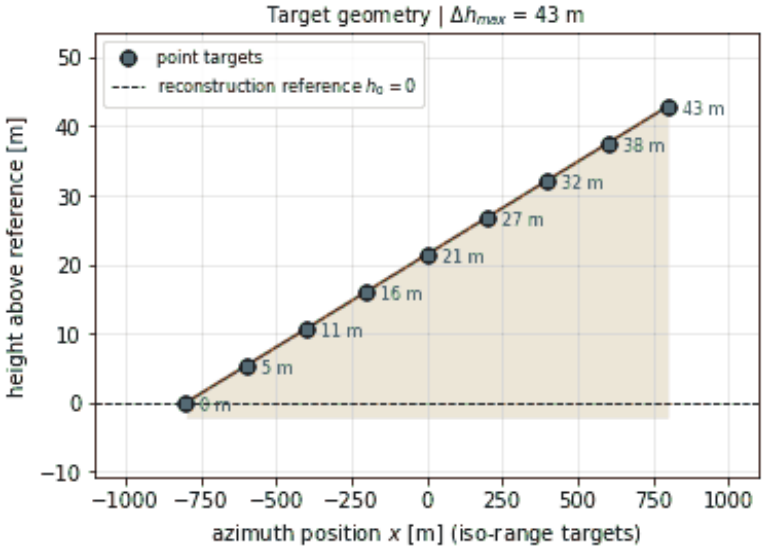



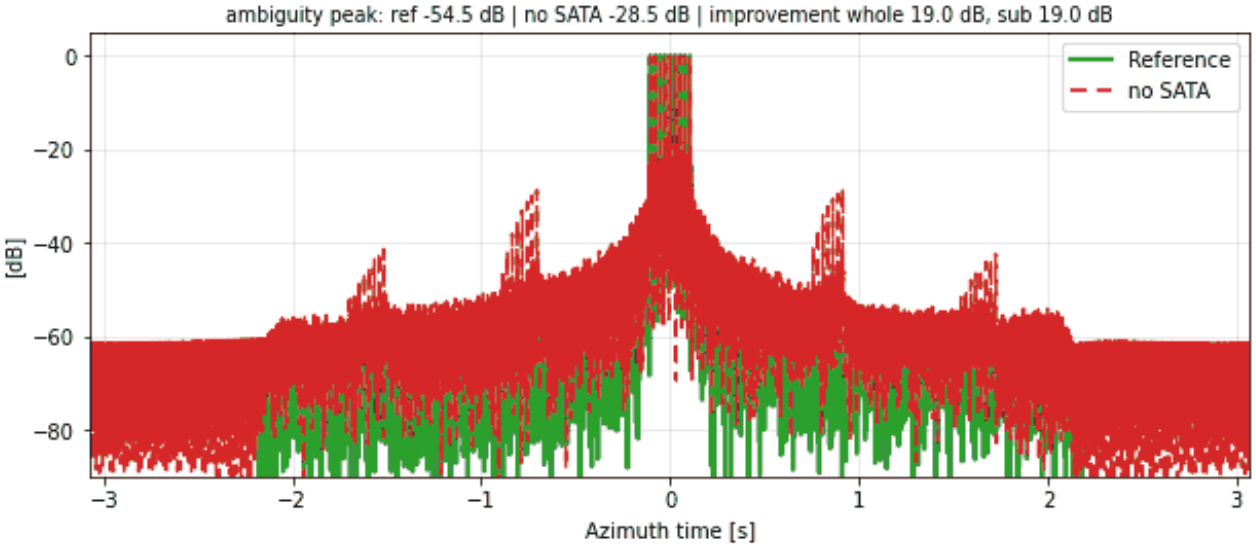



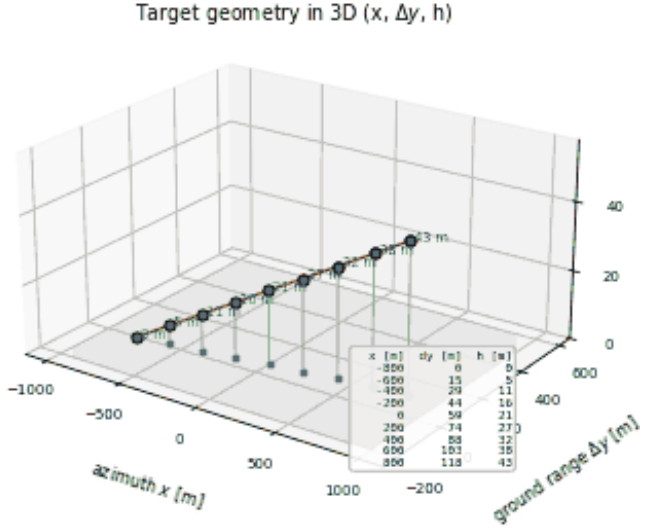
RA-SS-061 | SATA 1D | along-track ramp: N = 9, $\alpha = 15^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

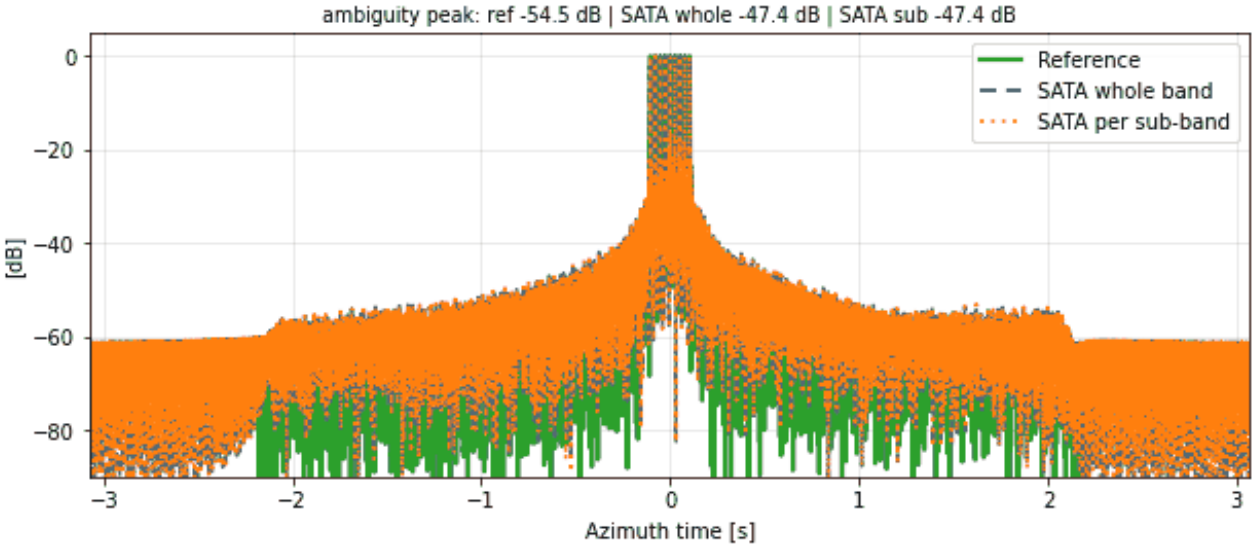






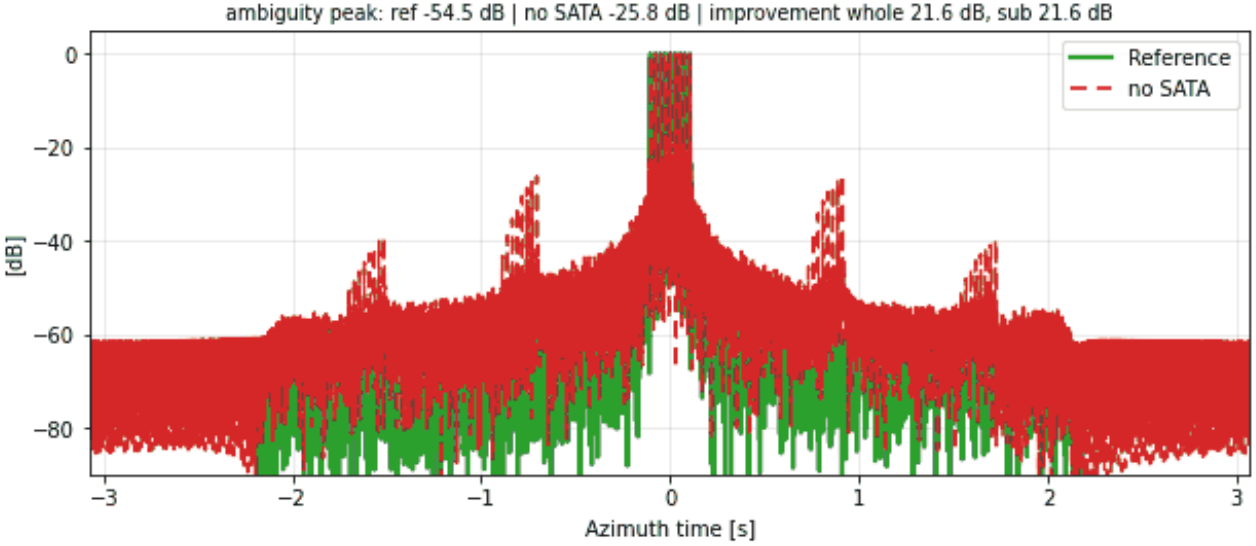



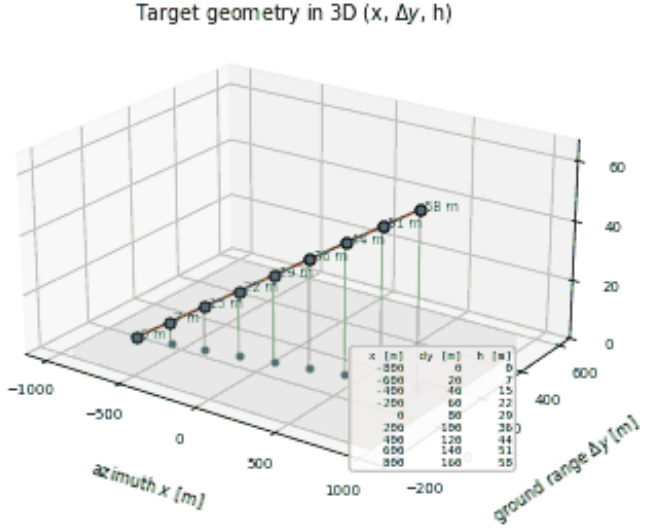



RA-SS-062 | SATA 1D | along-track ramp: N = 9, $\alpha = 20^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

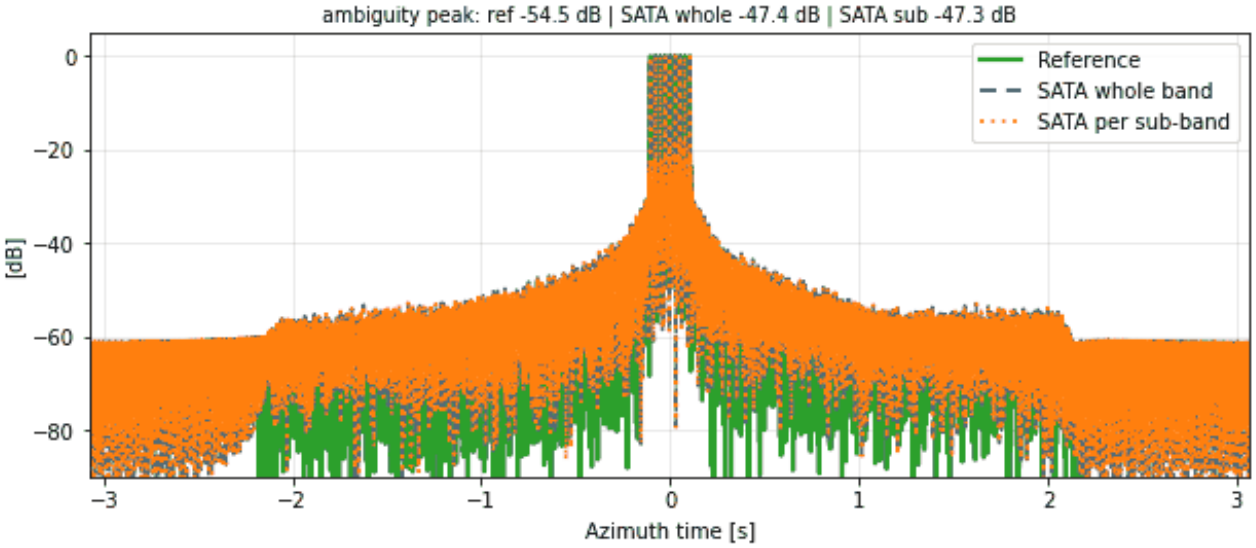

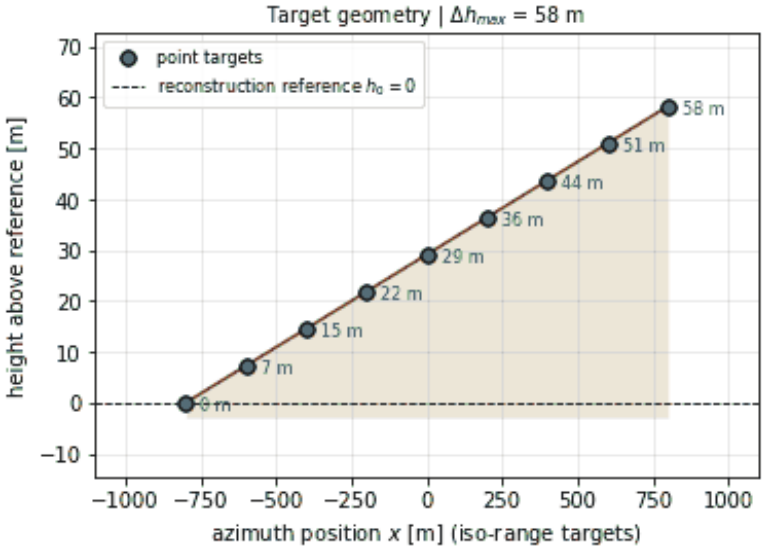



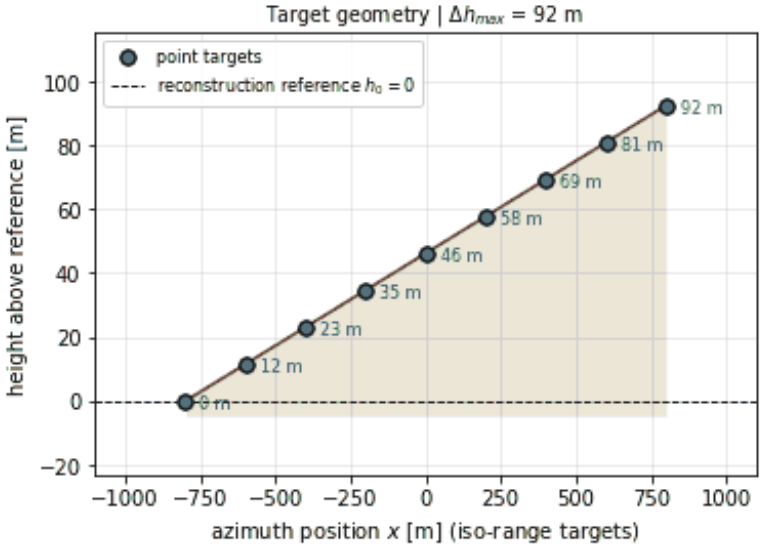



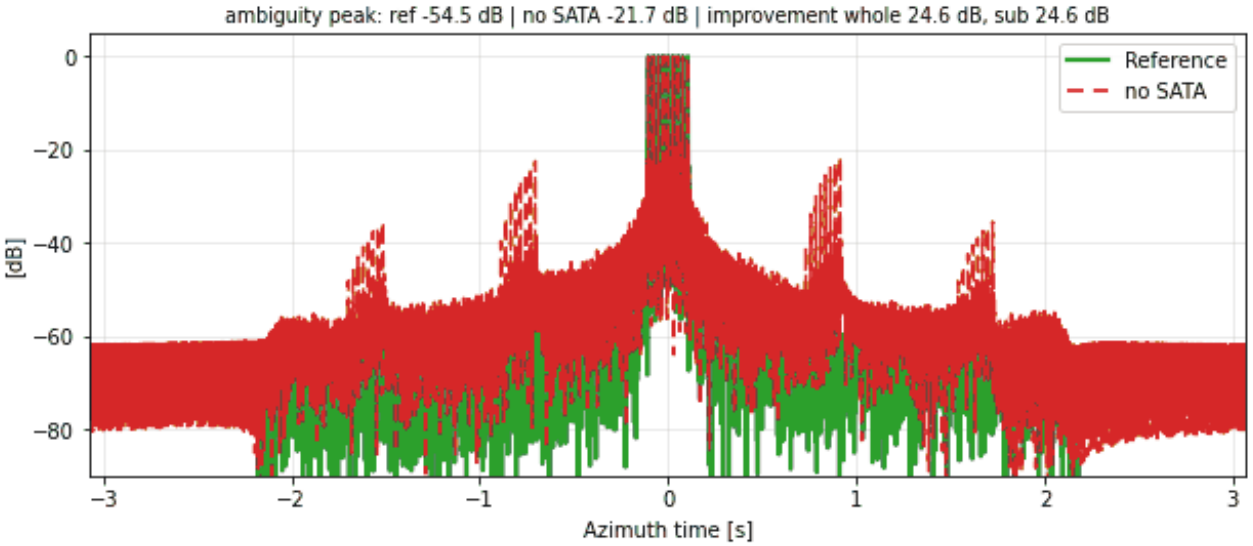



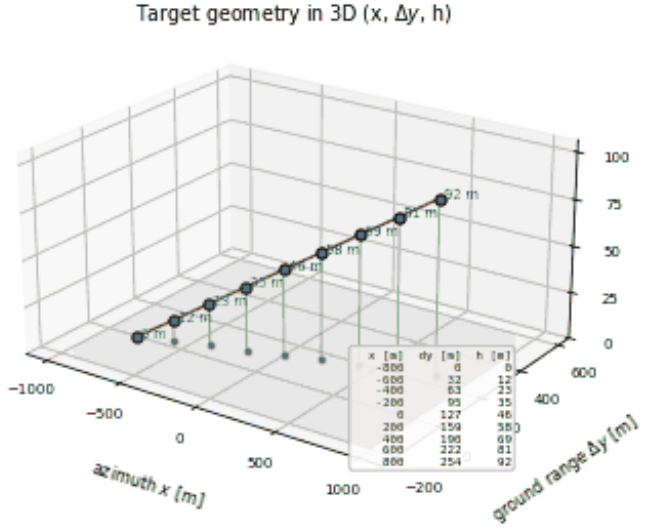
RA-SS-063 | SATA 1D | along-track ramp: N = 9, $\alpha = 30^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

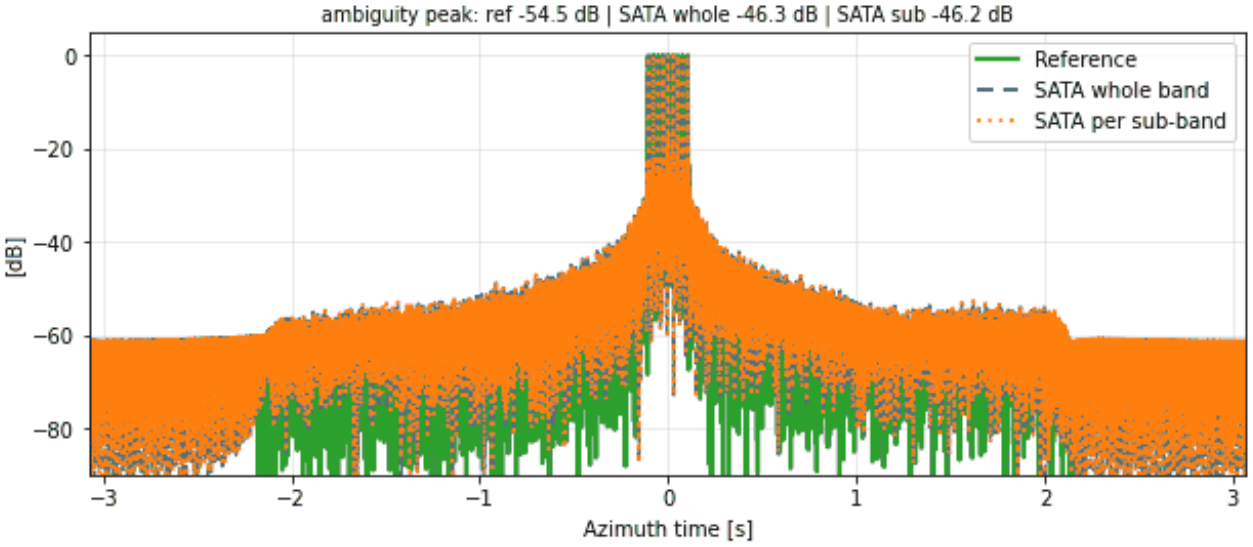





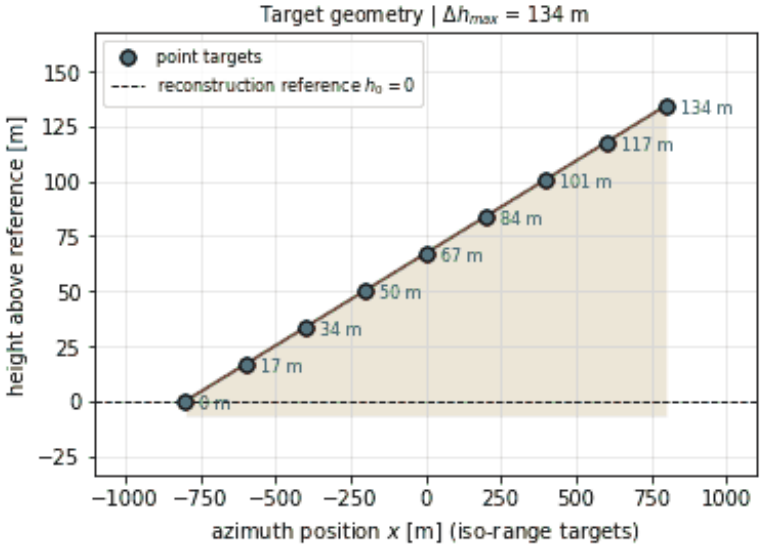



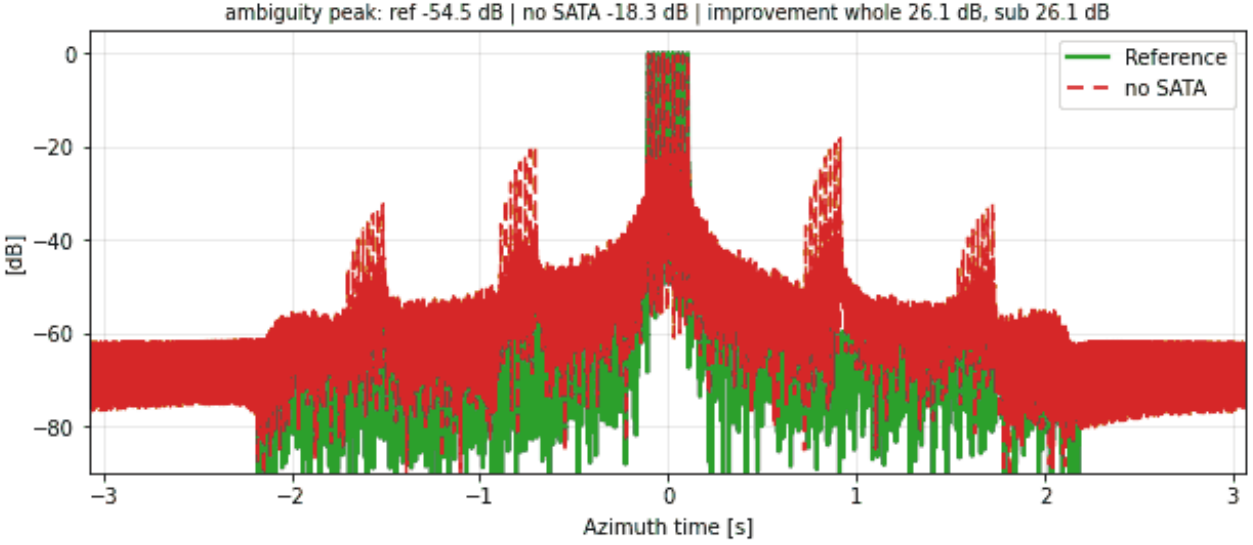



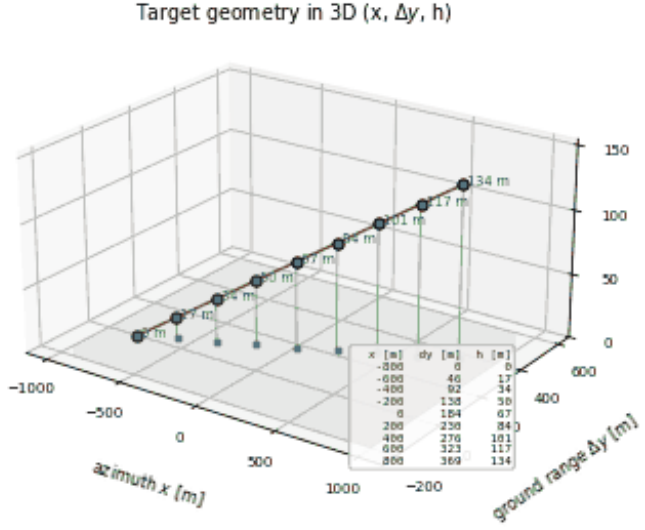
RA-SS-064 | SATA 1D | along-track ramp: N = 9, $\alpha = 40°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

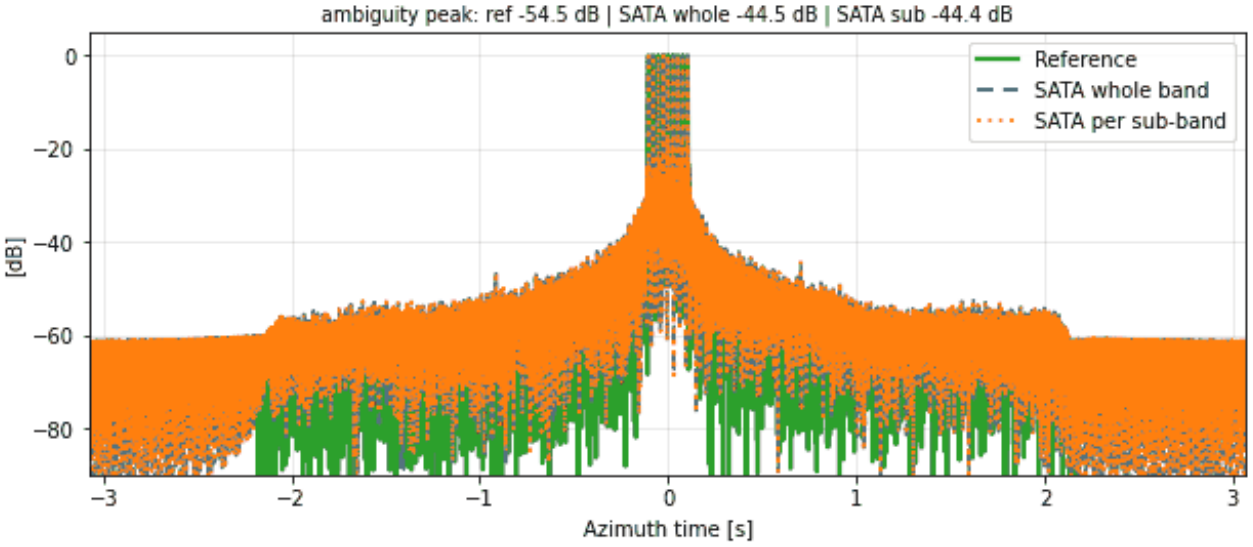





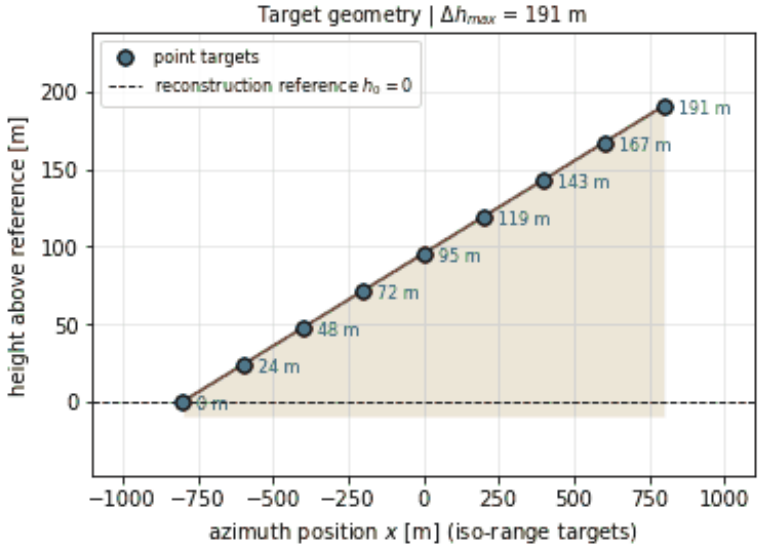



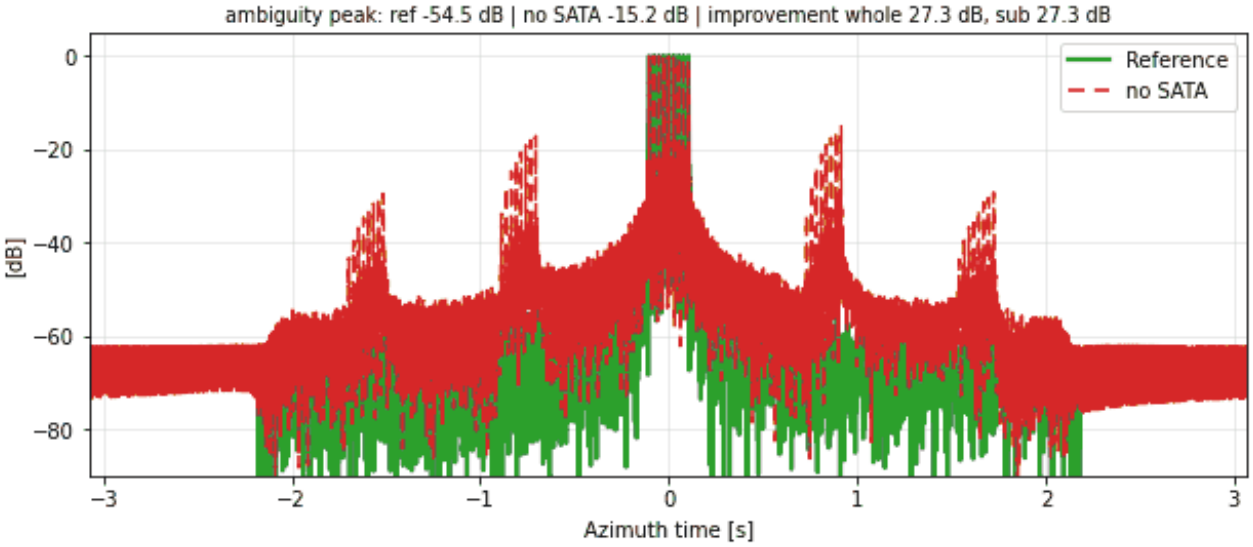



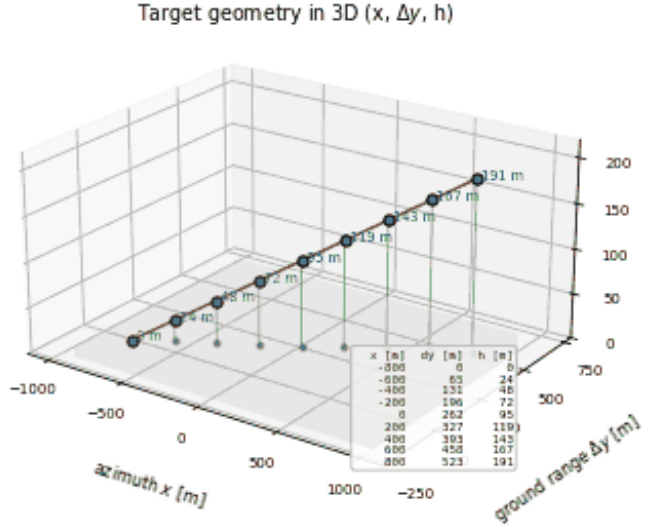
RA-SS-065 | SATA 1D | along-track ramp: N = 9, $\alpha = 50^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

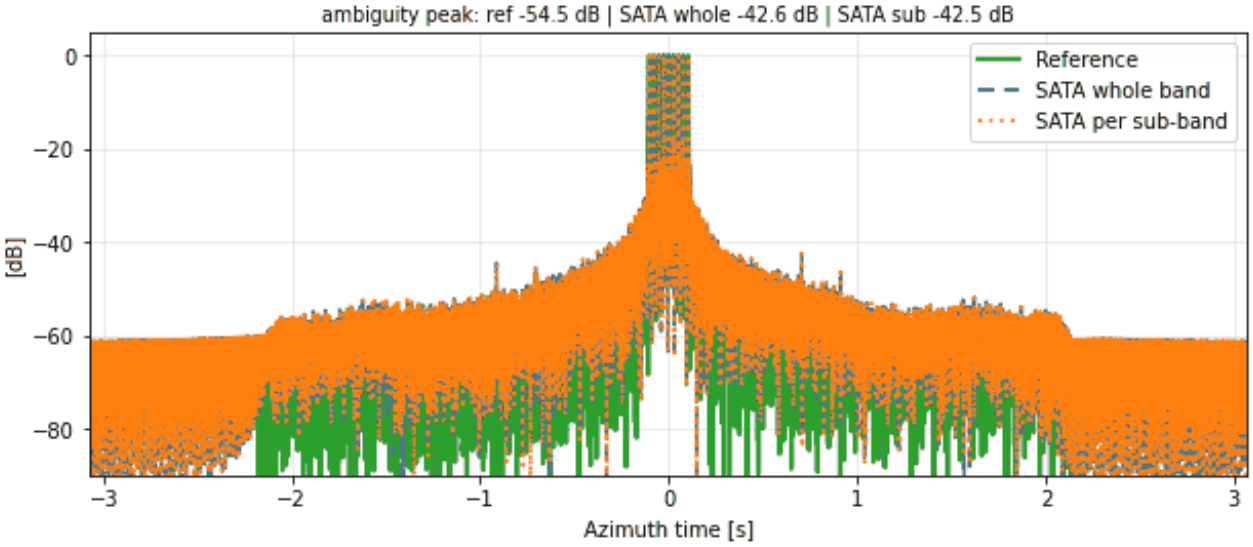






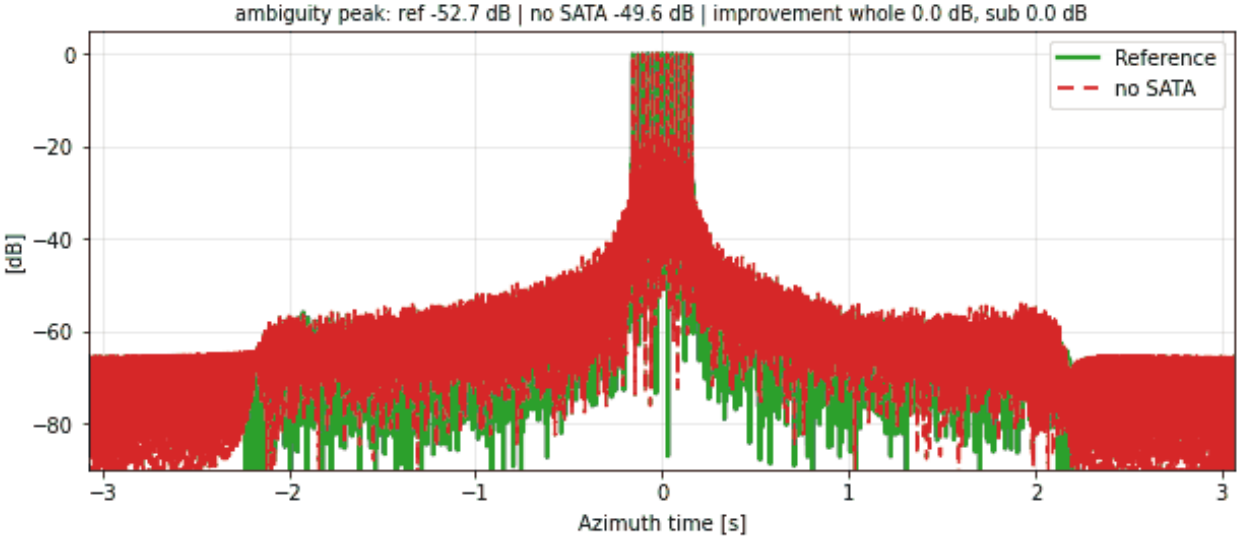



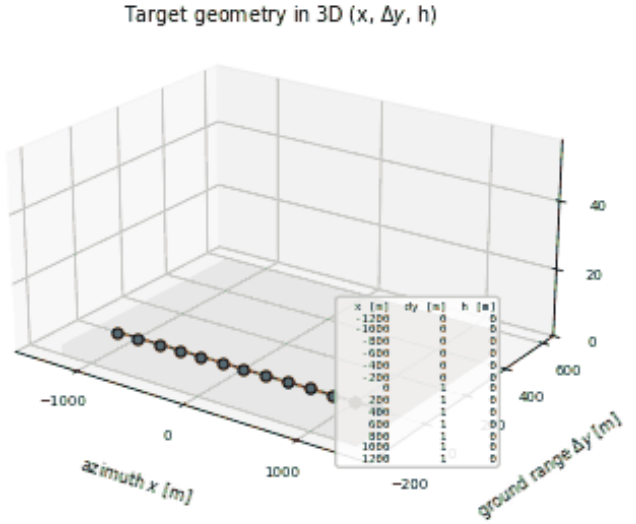



RA-SS-066 | SATA 1D | along-track ramp: N = 13, $\alpha = 0.1^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

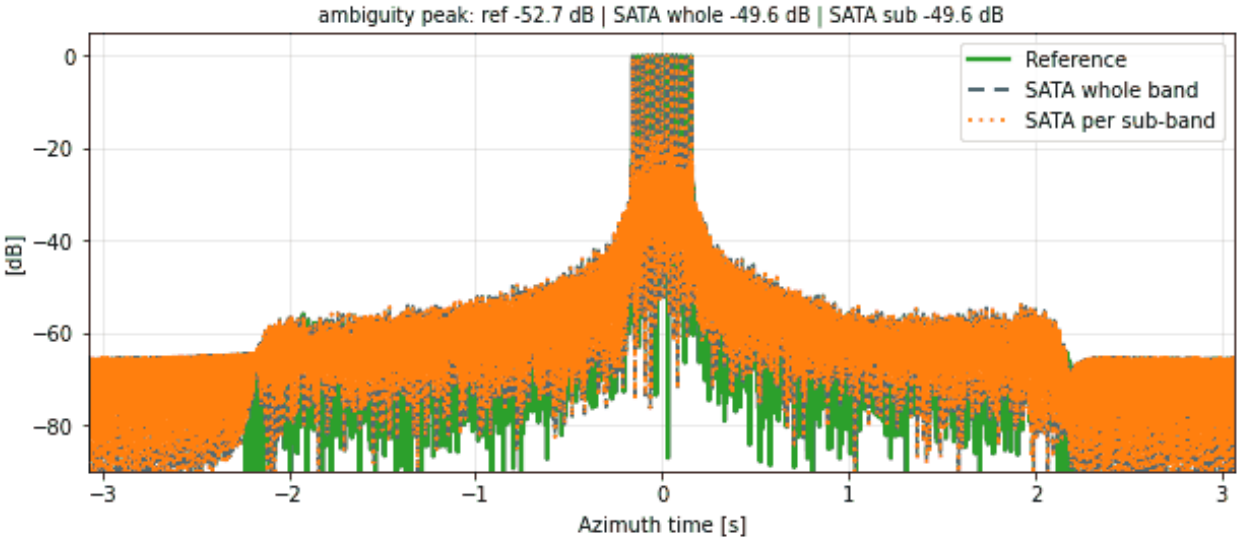

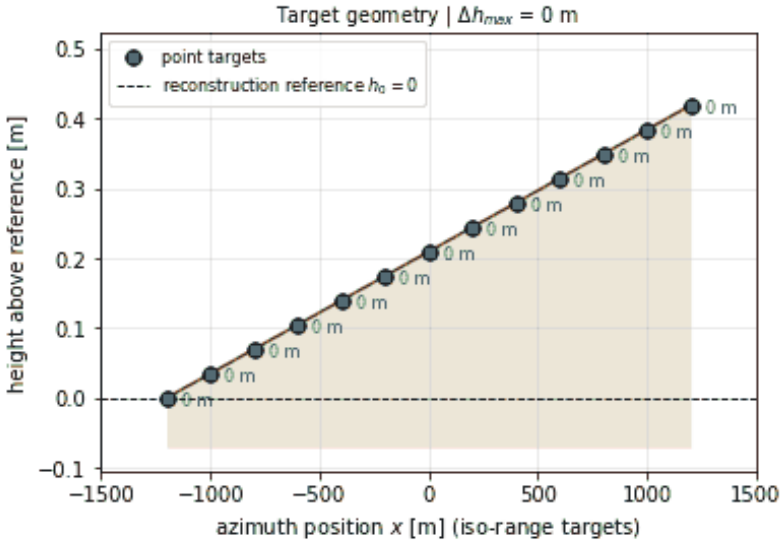



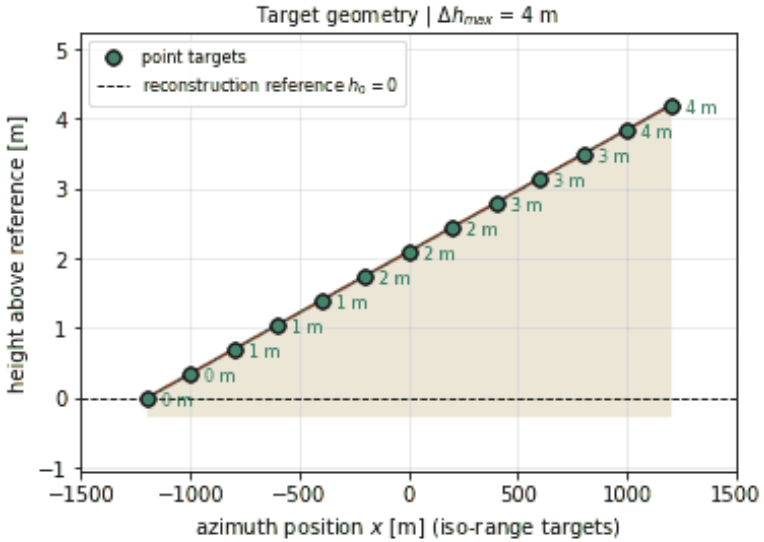



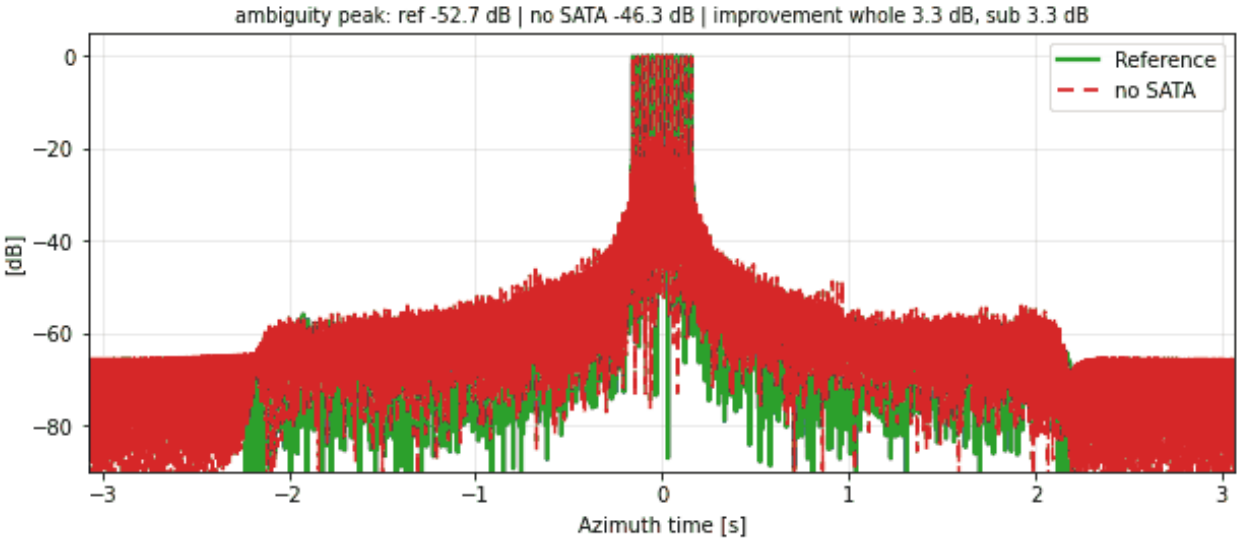



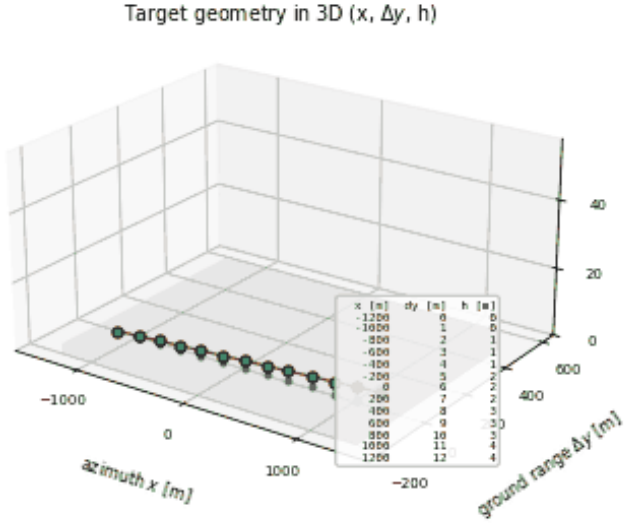
RA-SS-067 | SATA 1D | along-track ramp: N = 13, $\alpha = 1^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

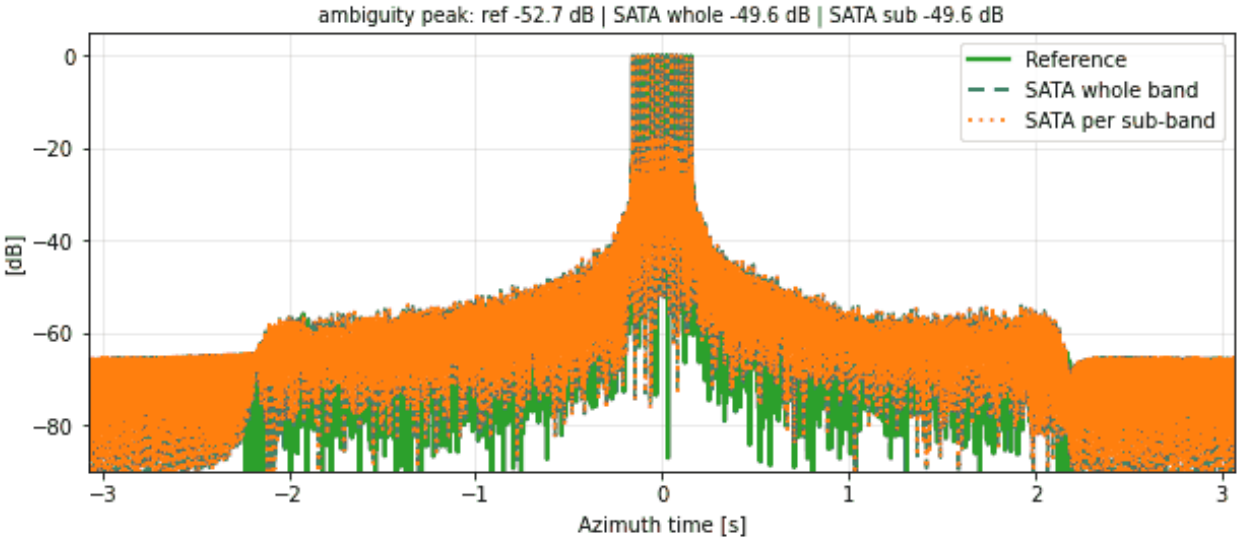






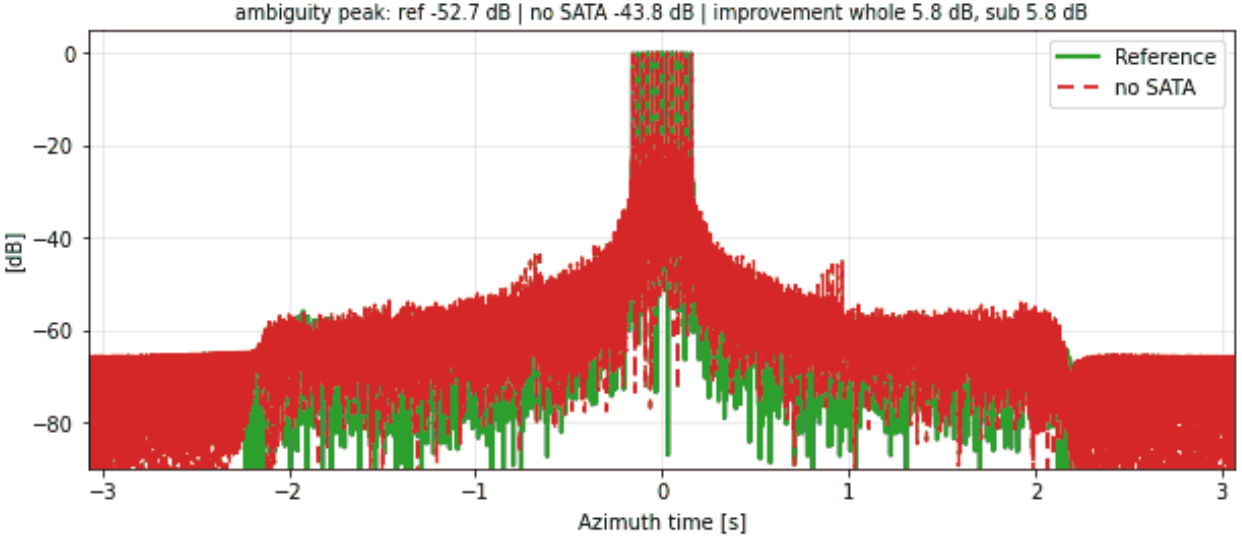



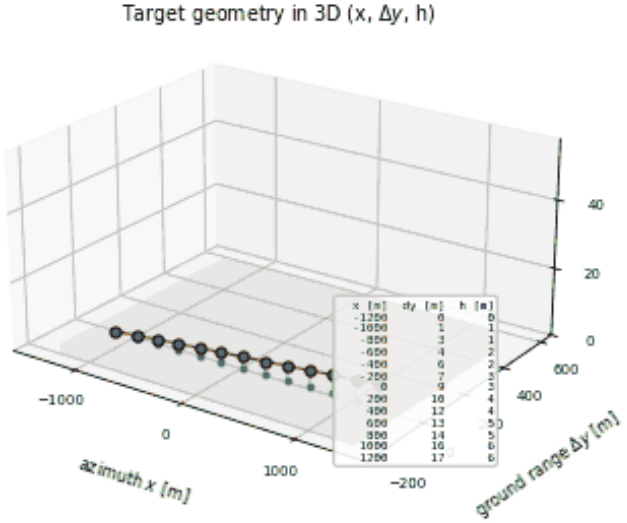



RA-SS-068 | SATA 1D | along-track ramp: N = 13, $\alpha = 1.5^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

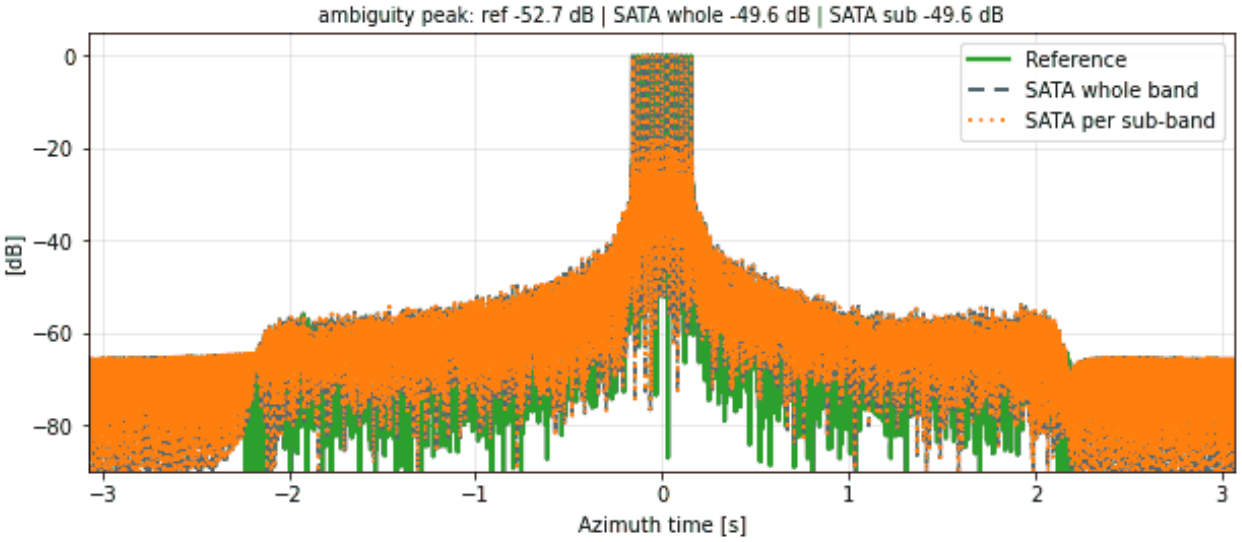


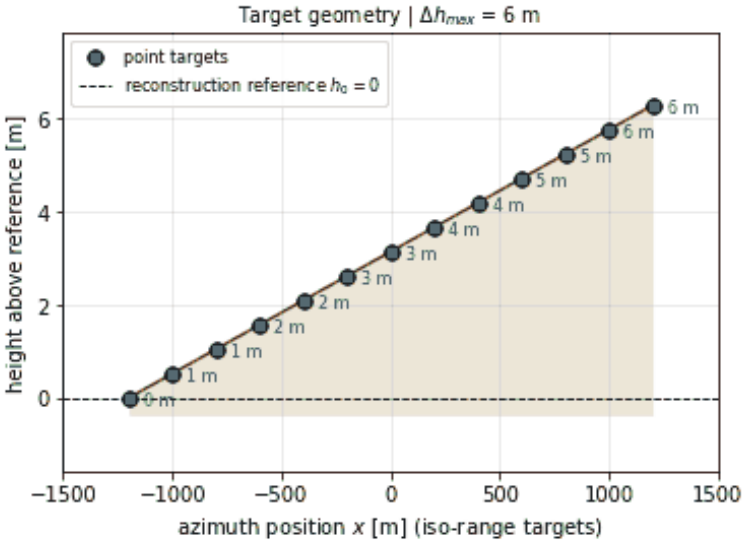



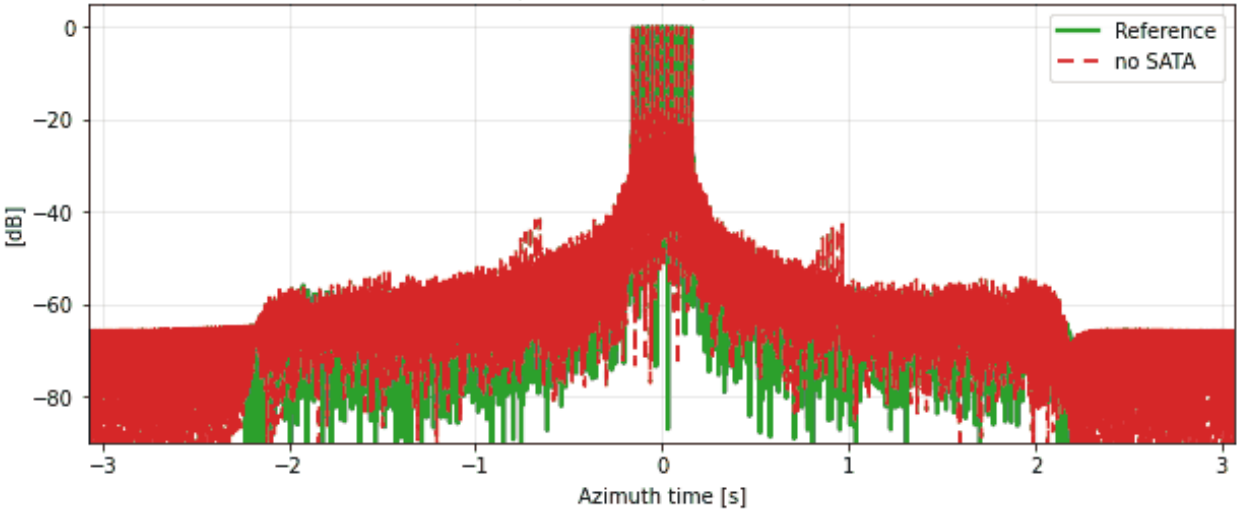



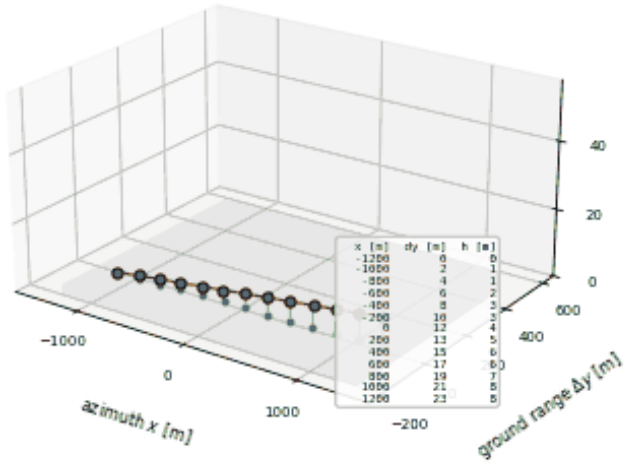



RA-SS-069 | SATA 1D | along-track ramp: N = 13, $\alpha = 2^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

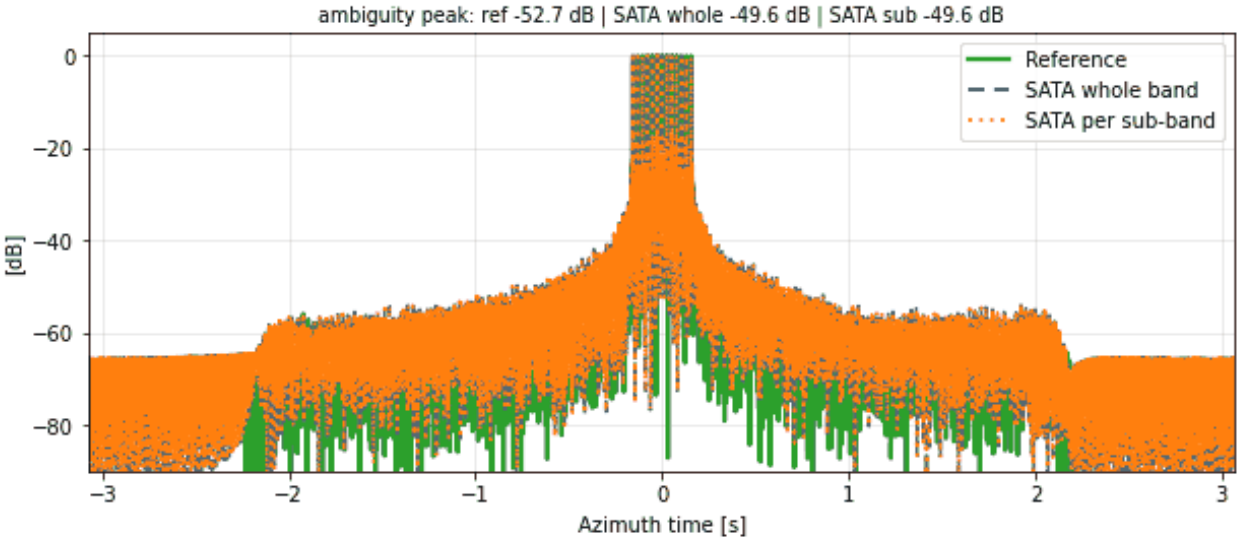


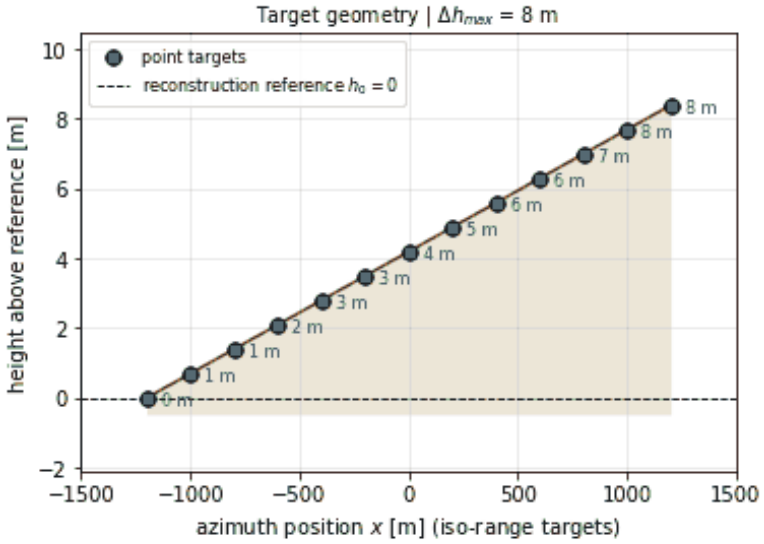



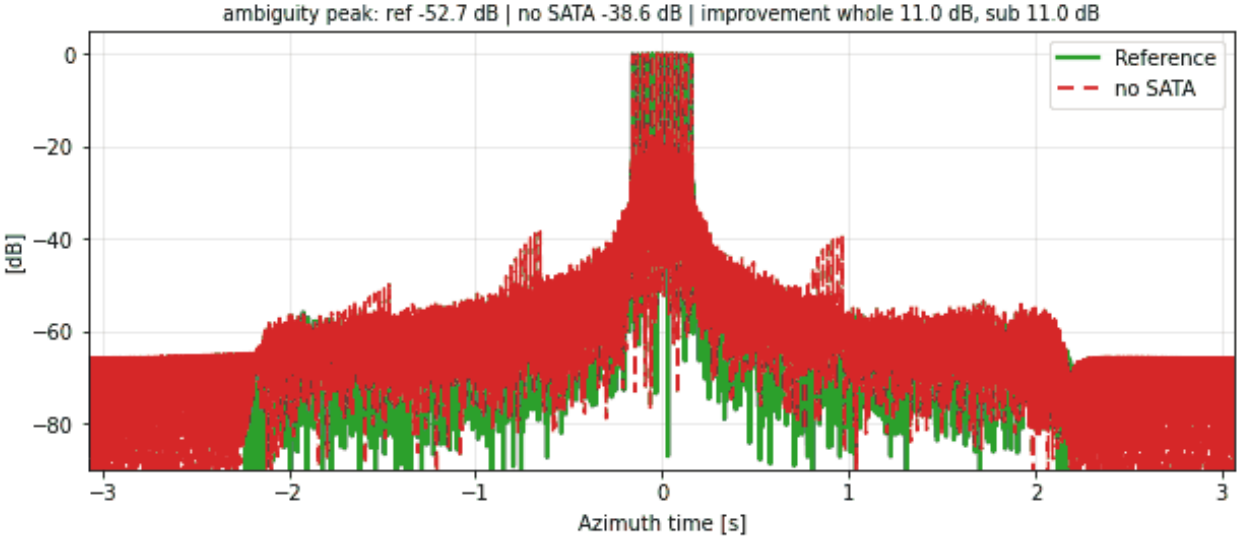



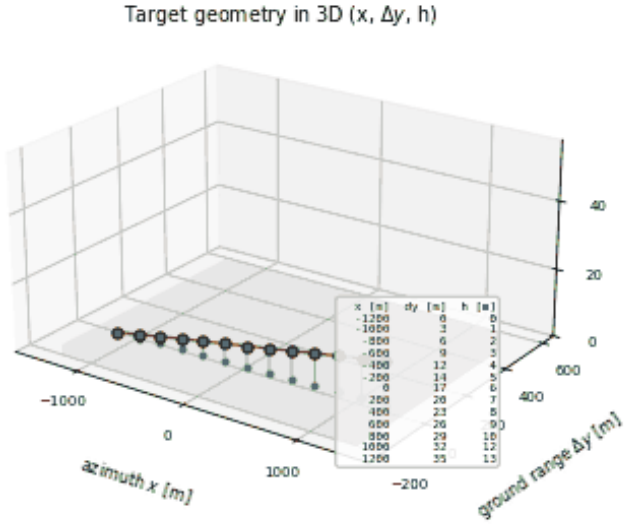



RA-SS-070 | SATA 1D | along-track ramp: N = 13, $\alpha = 3^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

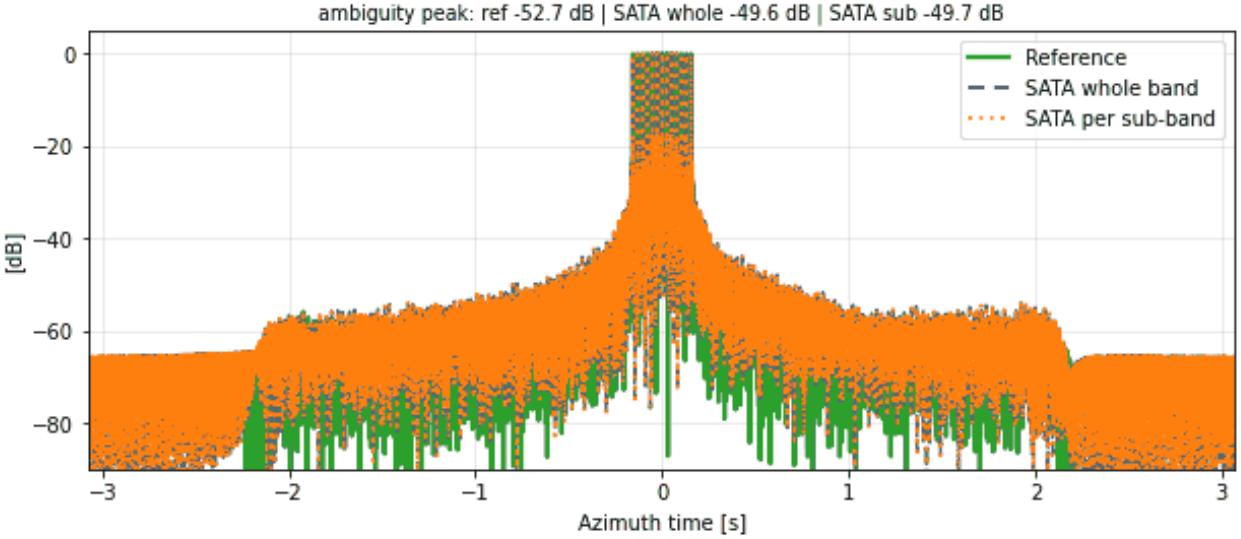

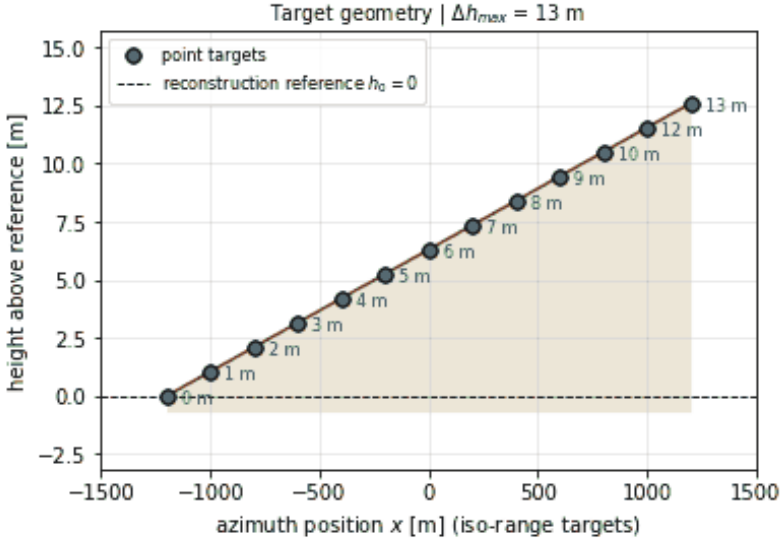



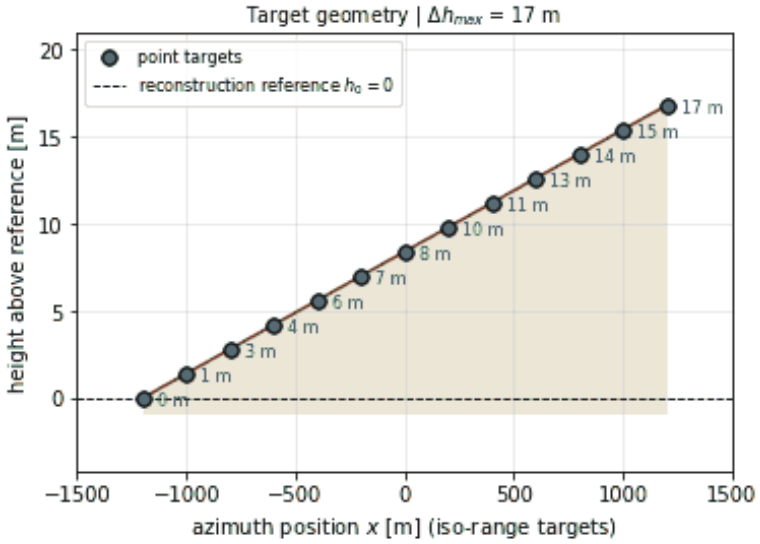



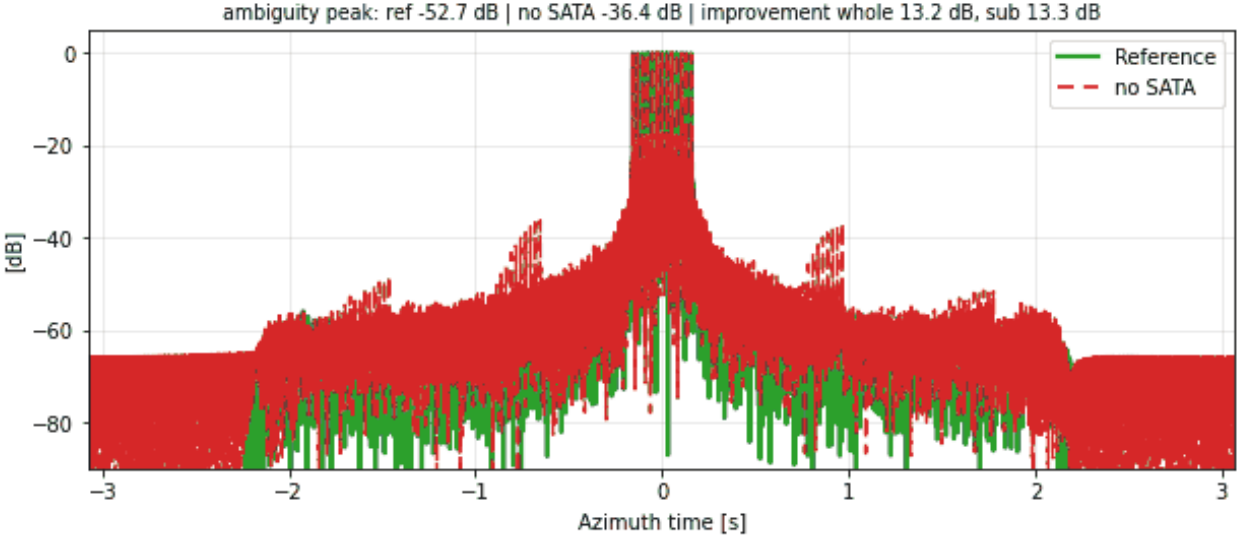



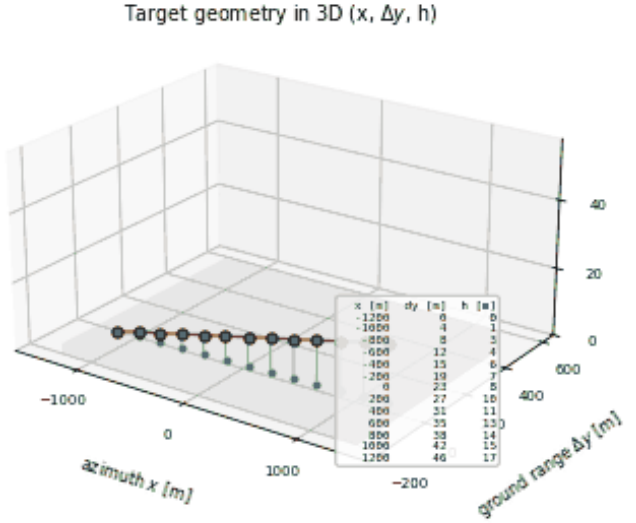
RA-SS-071 | SATA 1D | along-track ramp: N = 13, $\alpha = 4°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

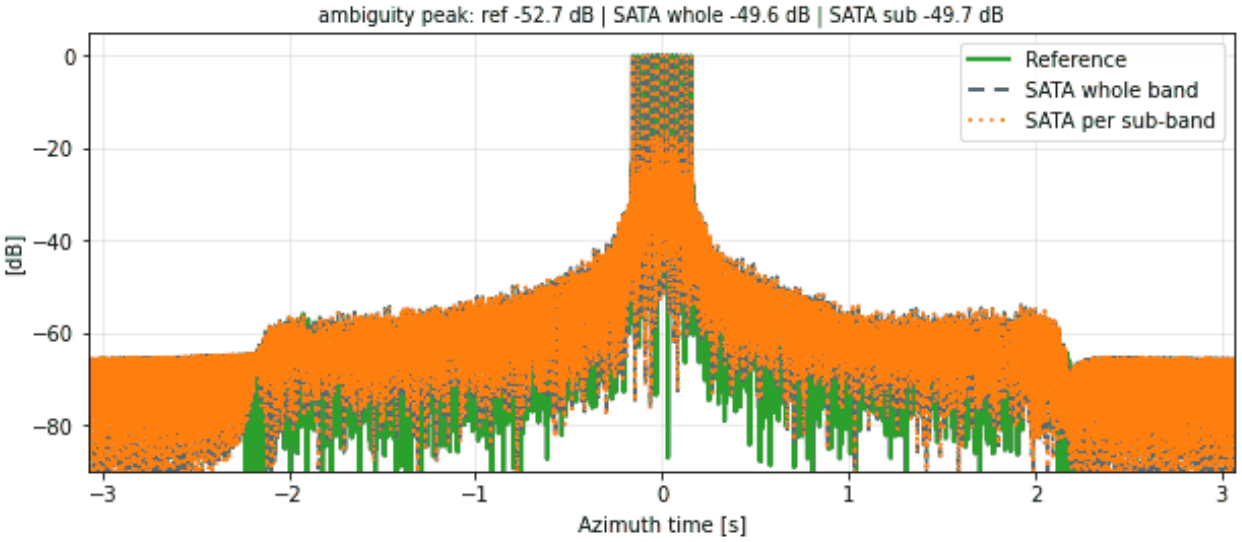





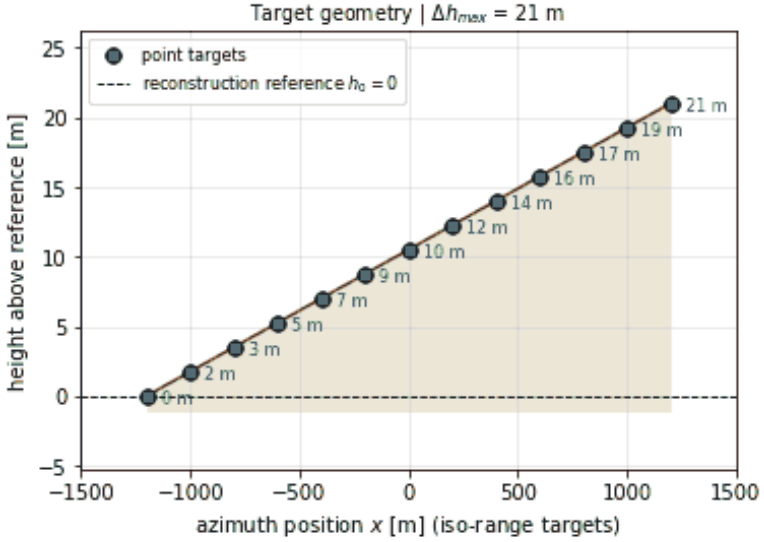



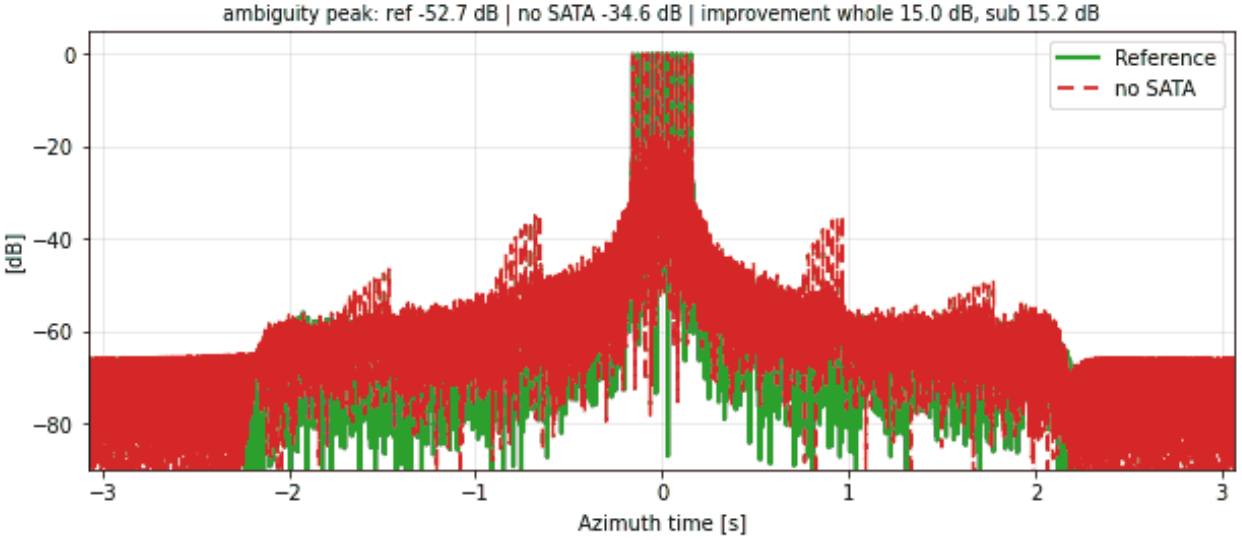



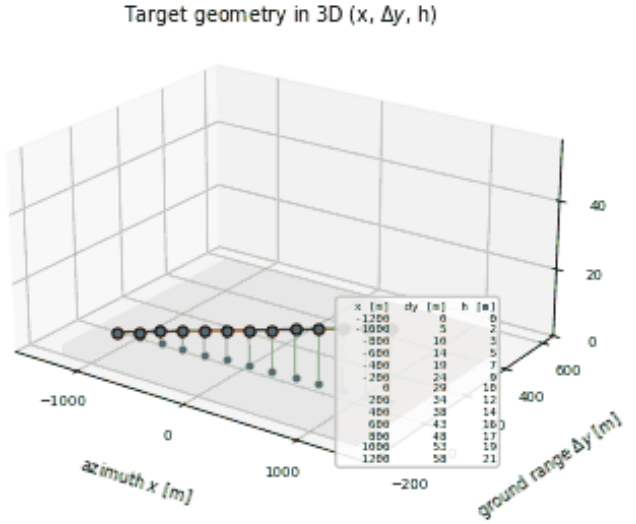
RA-SS-072 | SATA 1D | along-track ramp: N = 13, $\alpha = 5^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

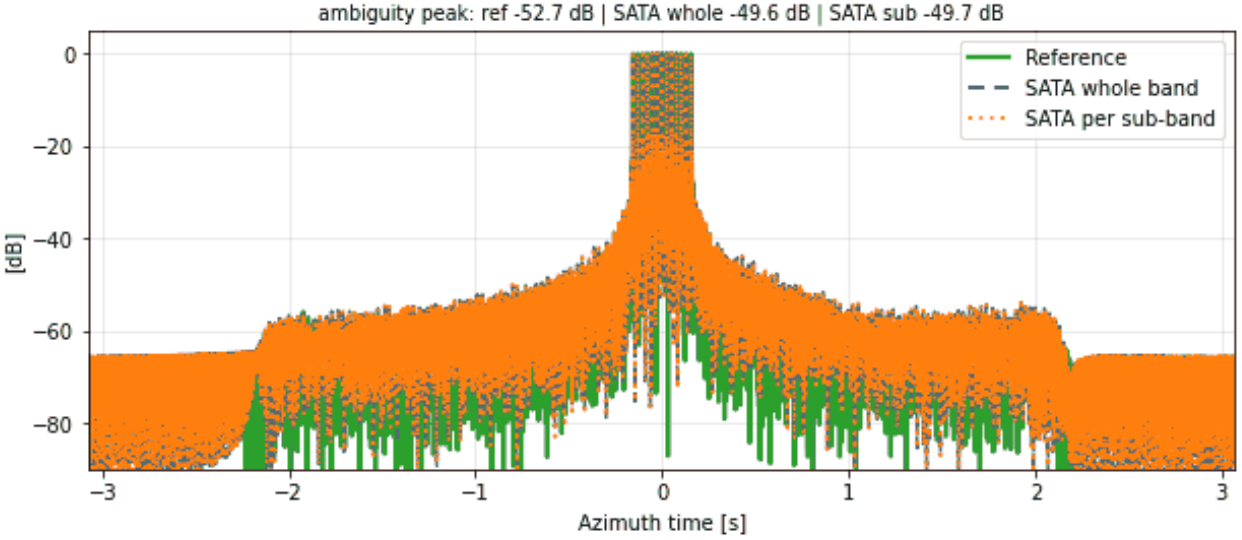






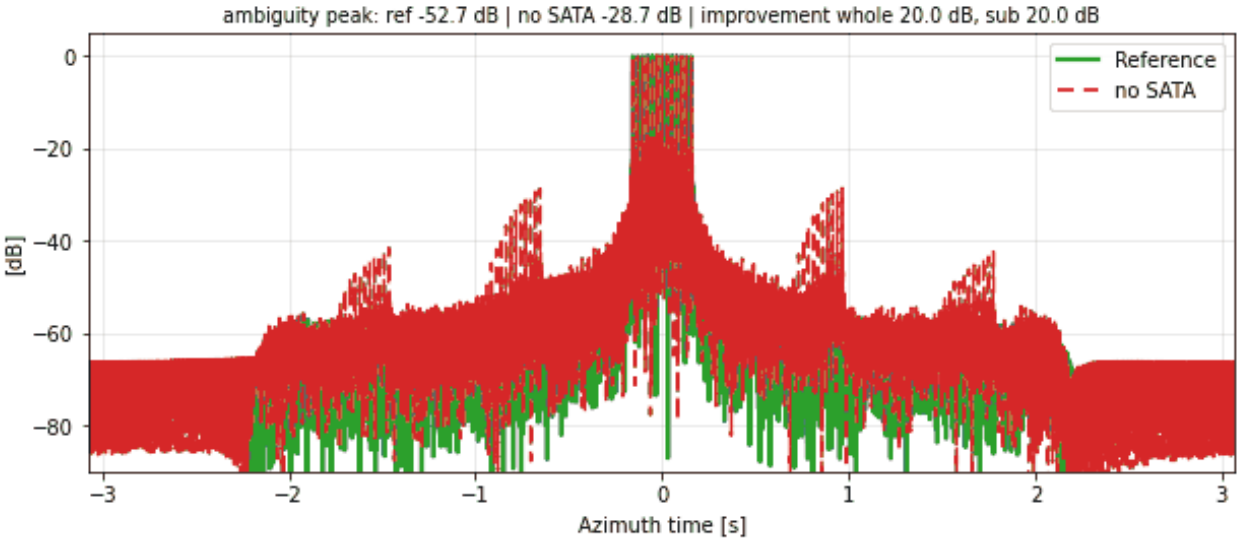



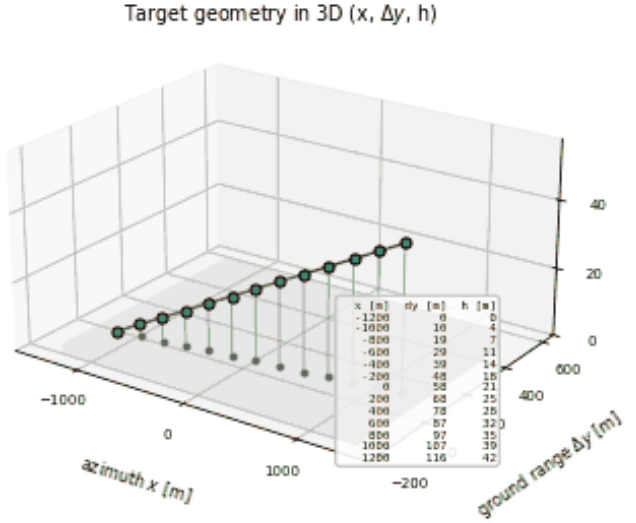



RA-SS-073 | SATA 1D | along-track ramp: N = 13, $\alpha = 10°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

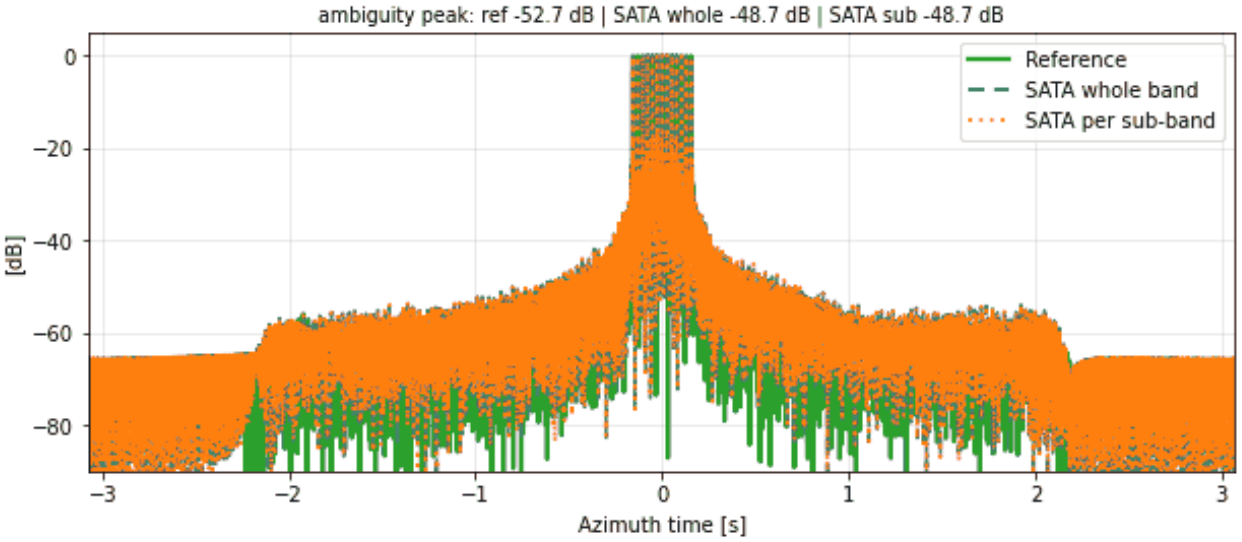


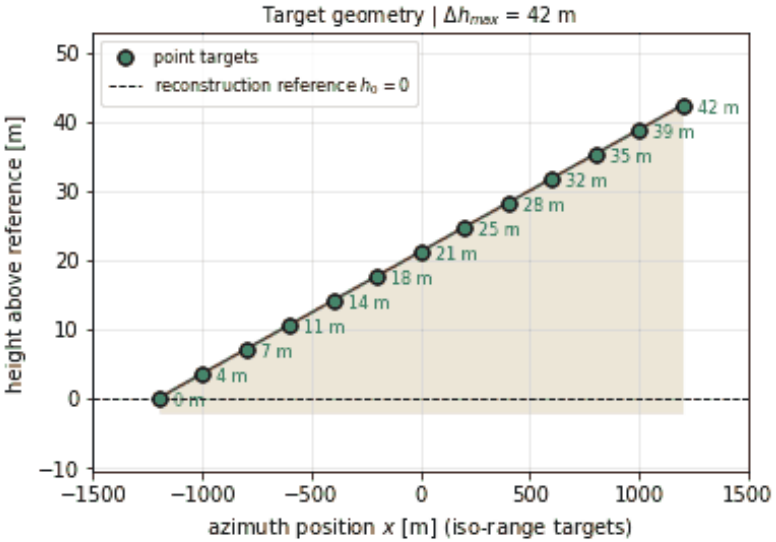



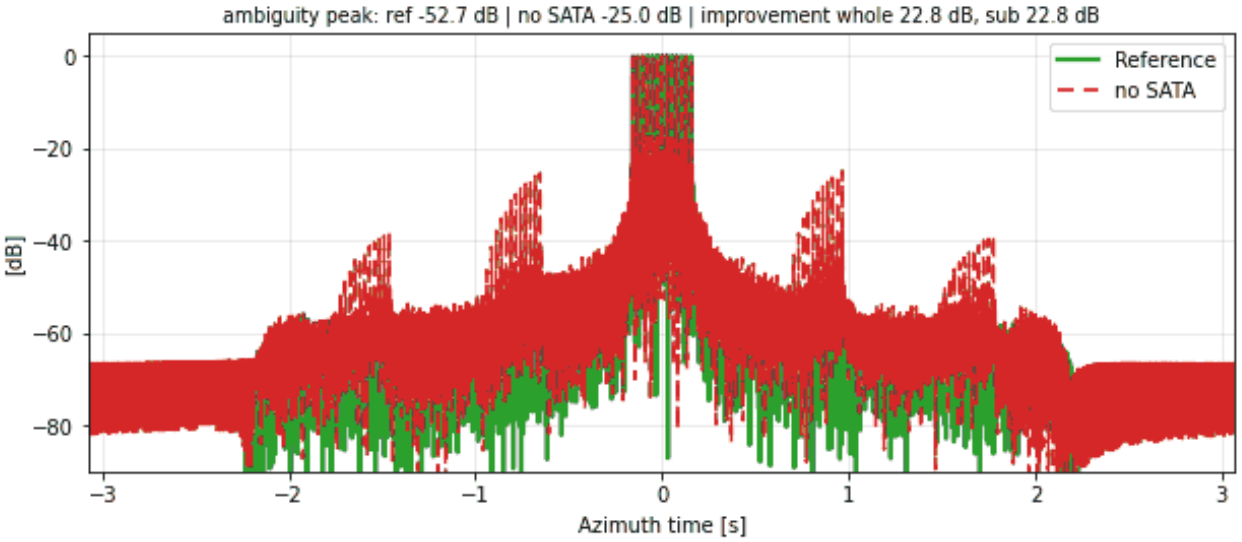



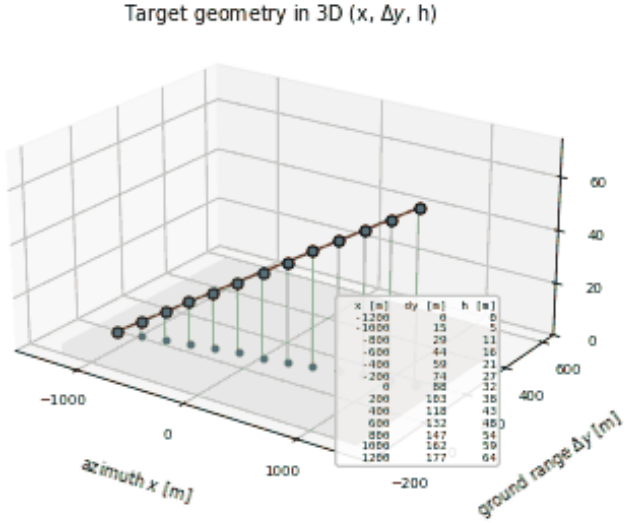



RA-SS-074 | SATA 1D | along-track ramp: N = 13, $\alpha = 15^\circ$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

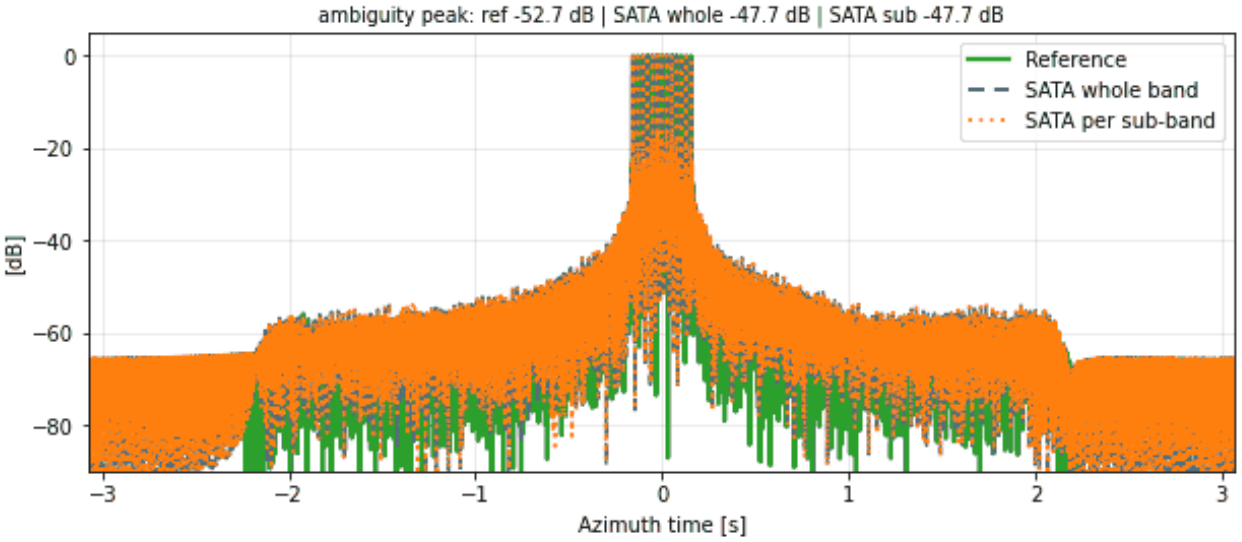


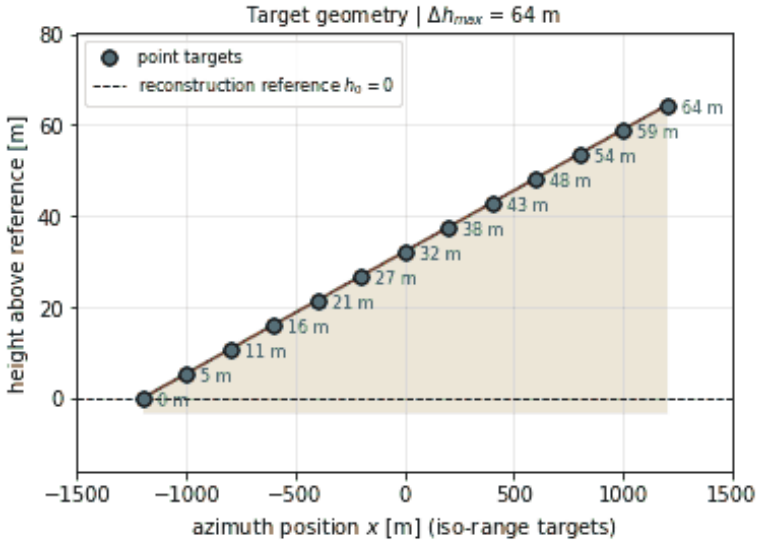



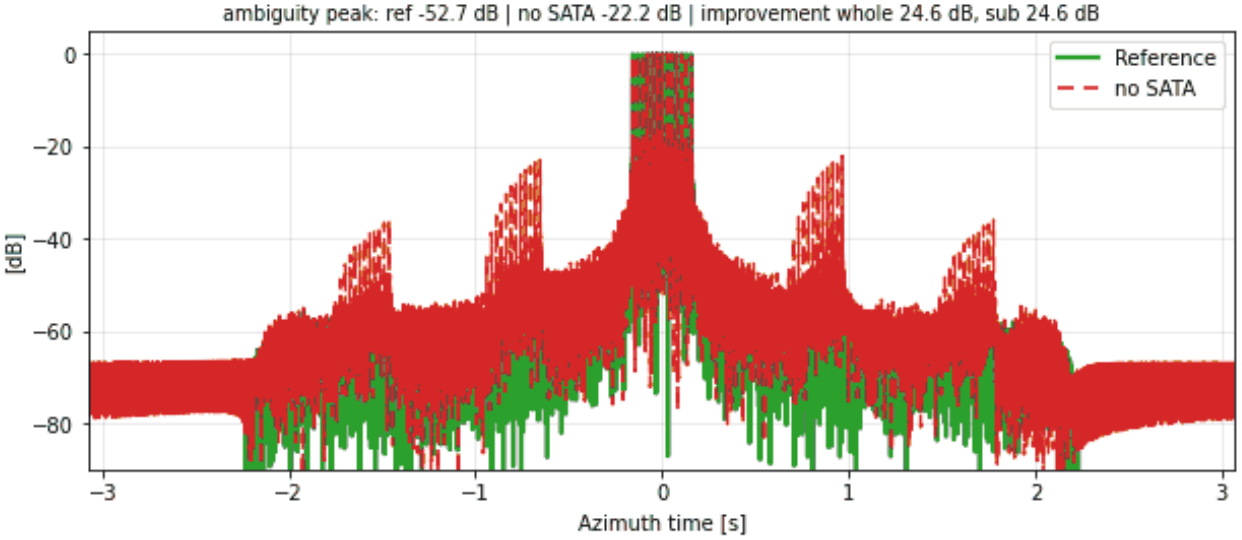



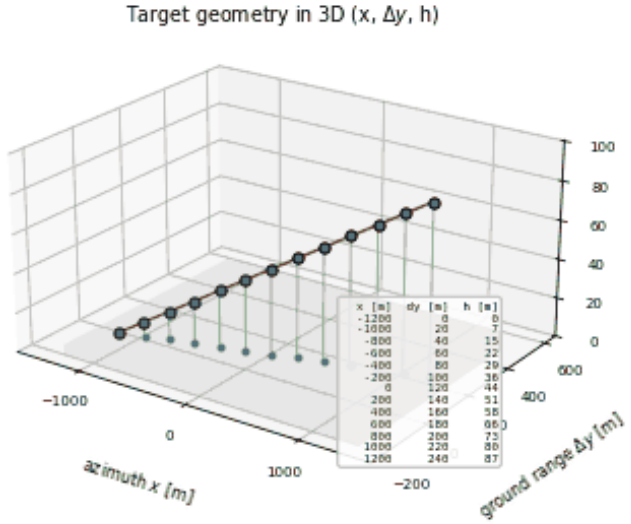



RA-SS-075 | SATA 1D | along-track ramp: N = 13, $\alpha = 20°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

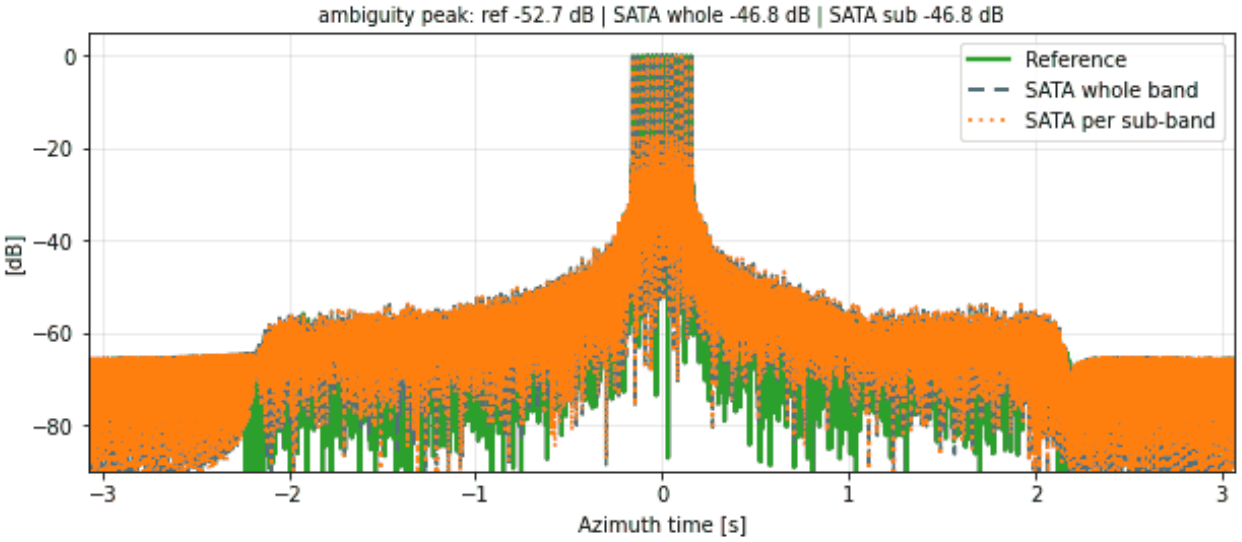


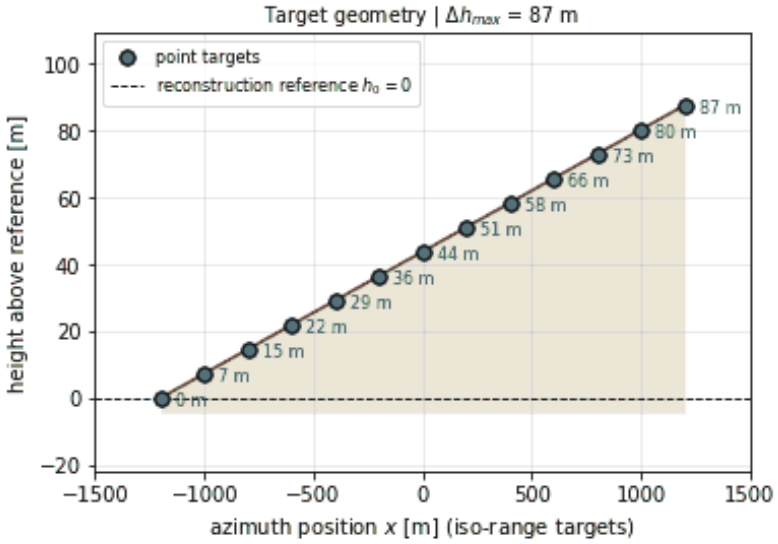



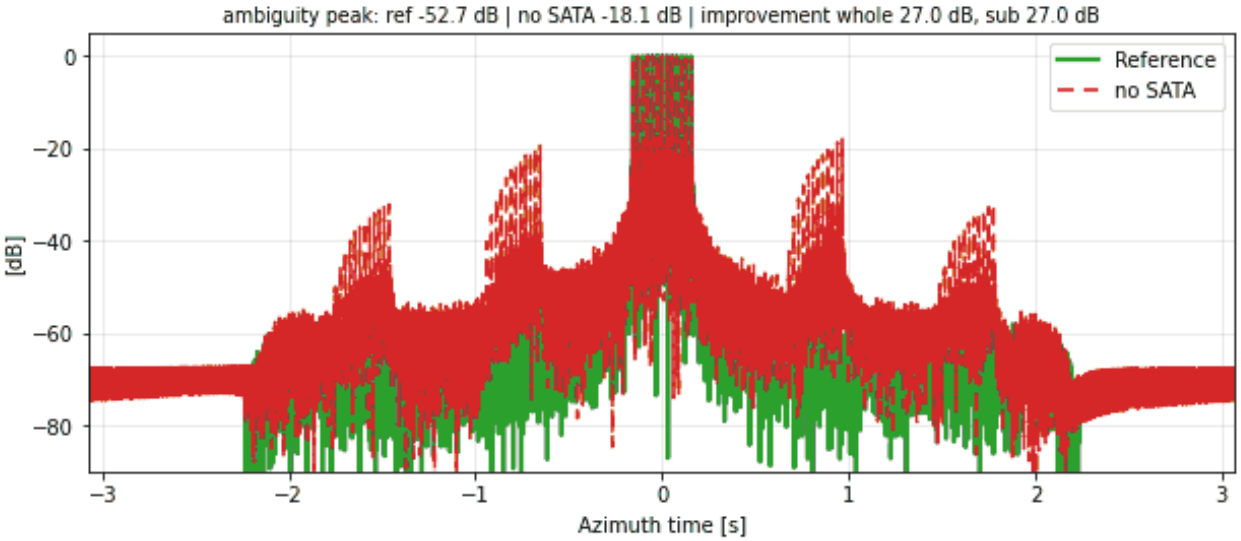



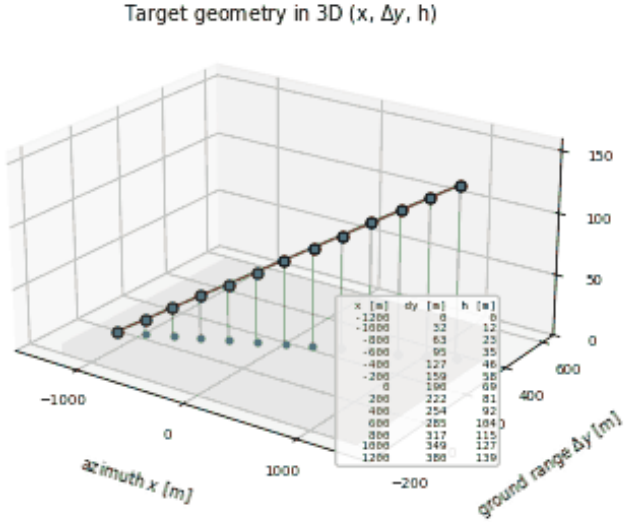



RA-SS-076 | SATA 1D | along-track ramp: N = 13, $\alpha = 30°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

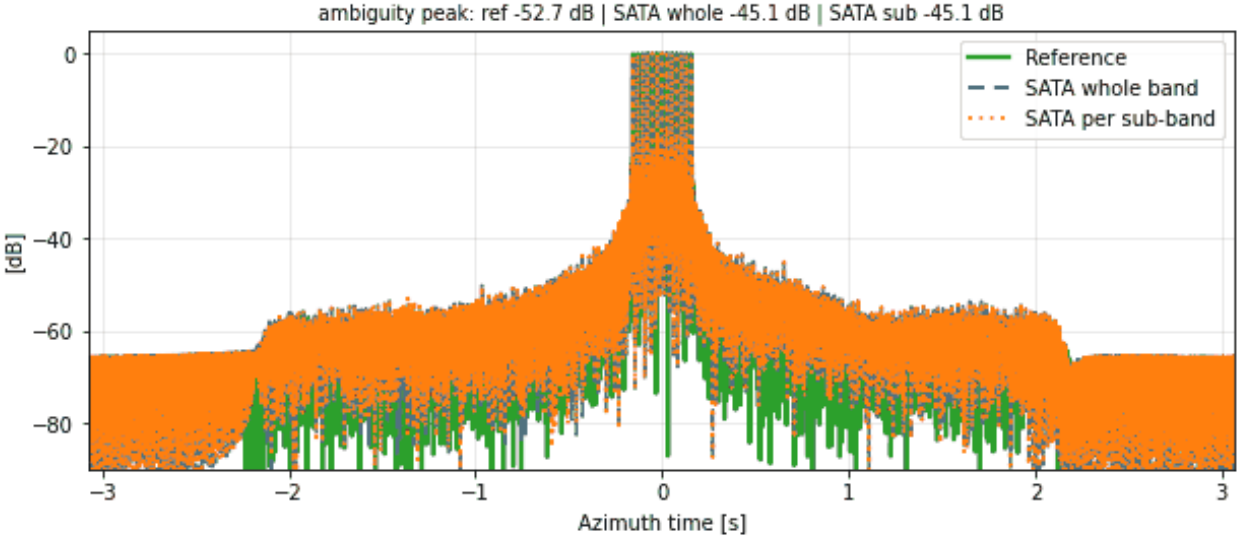

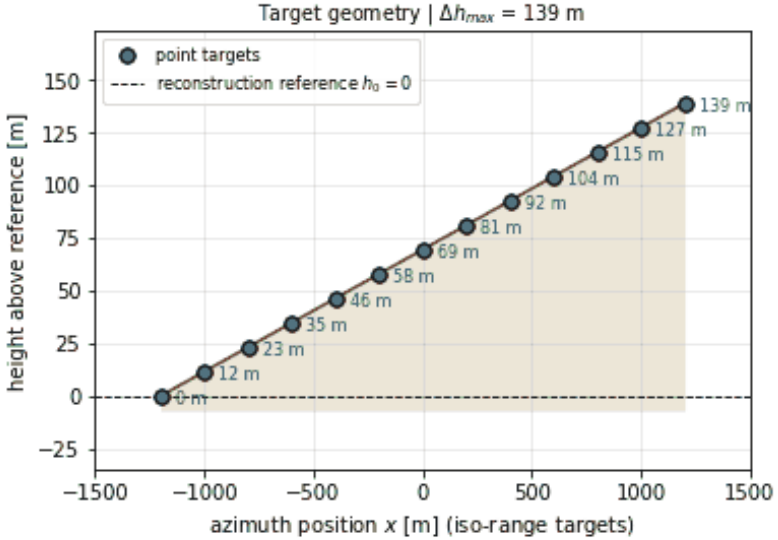



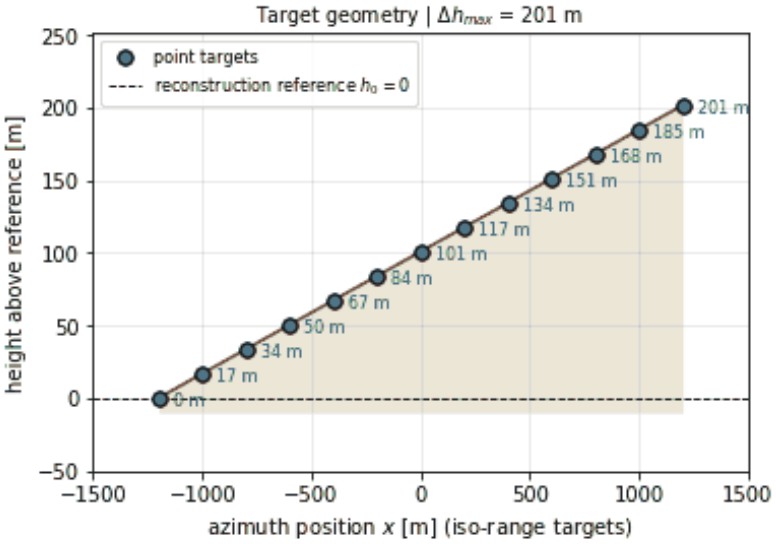



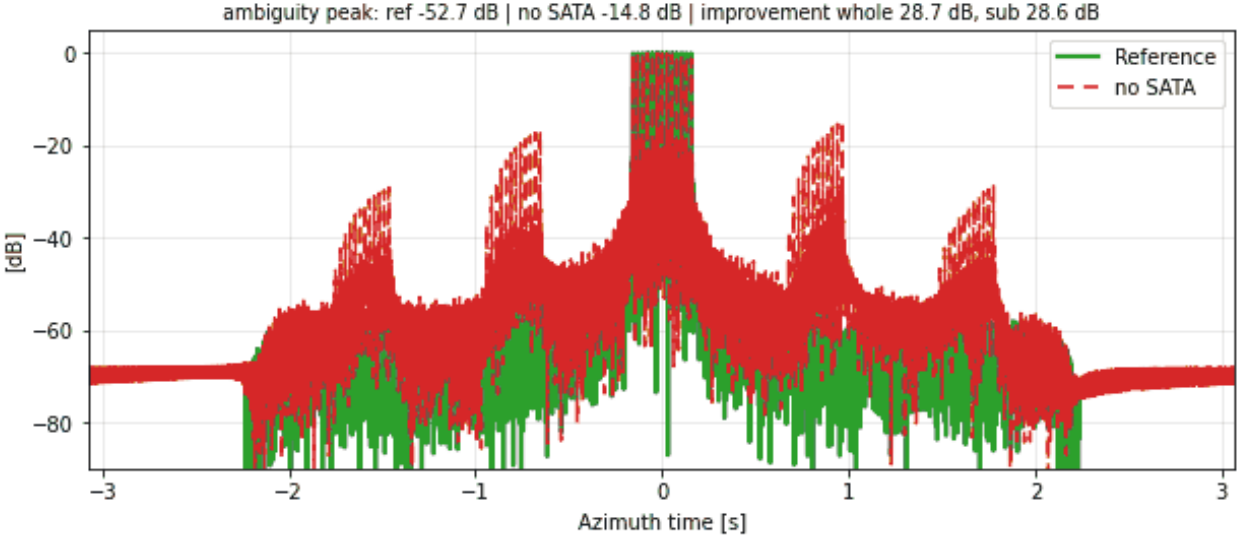



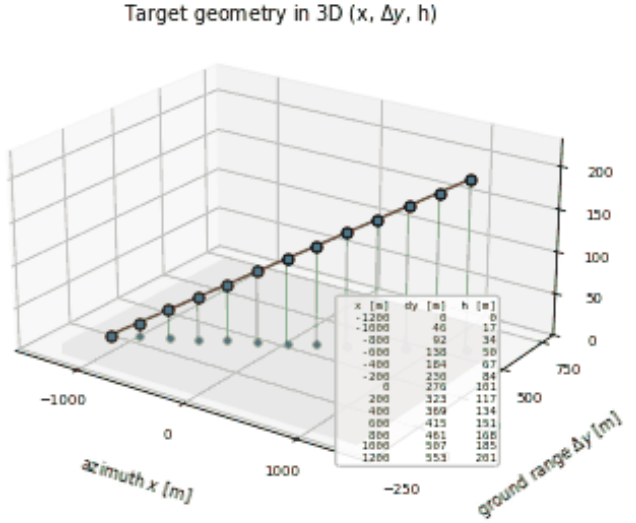
RA-SS-077 | SATA 1D | along-track ramp: N = 13, $\alpha = 40°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

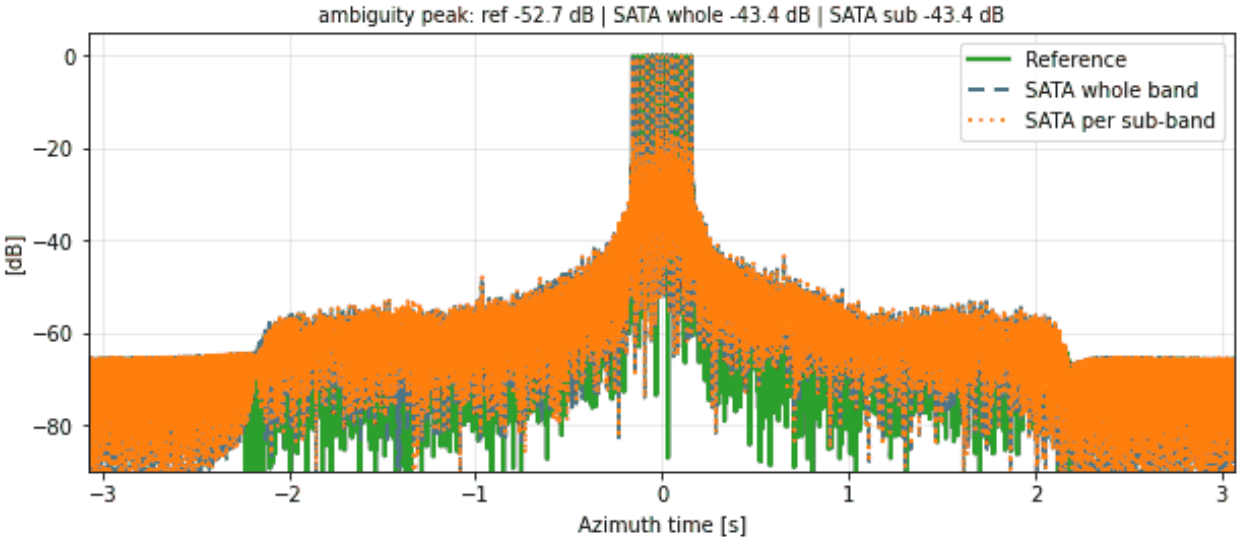





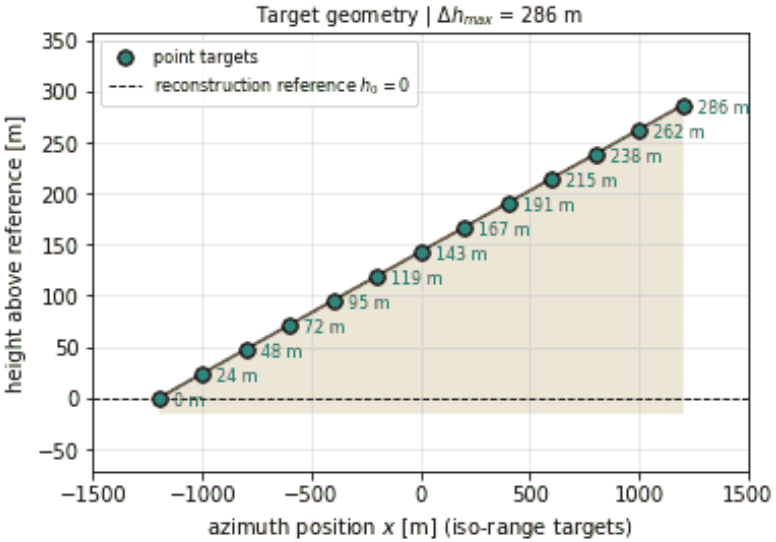



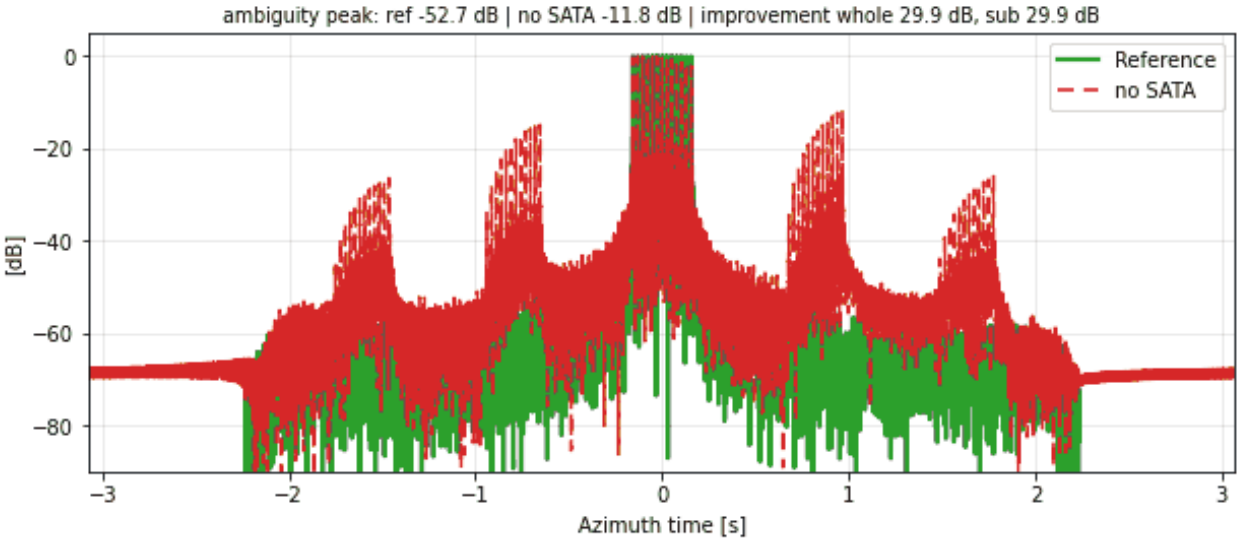



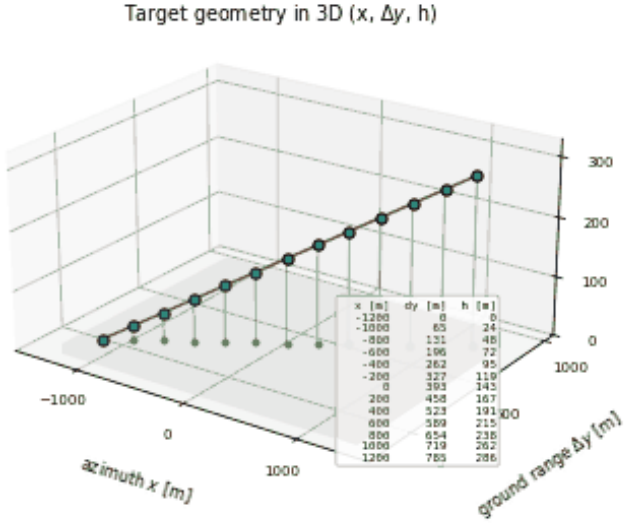
RA-SS-078 | SATA 1D | along-track ramp: N = 13, $\alpha = 50°$ (heights $j \cdot 20\tan\alpha$), targets 200 m apart (small distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

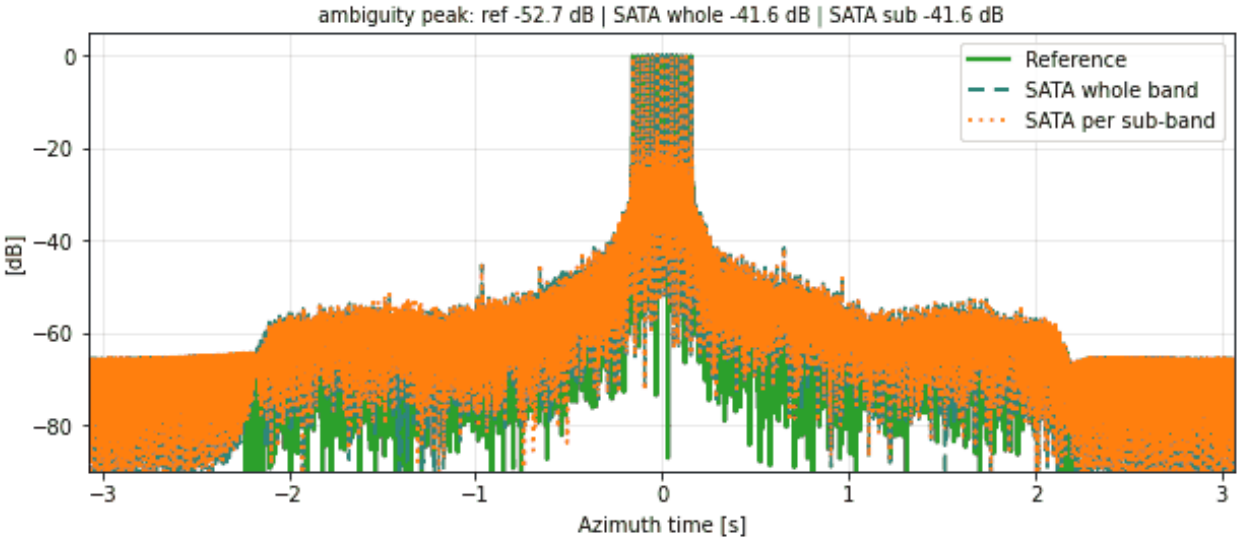






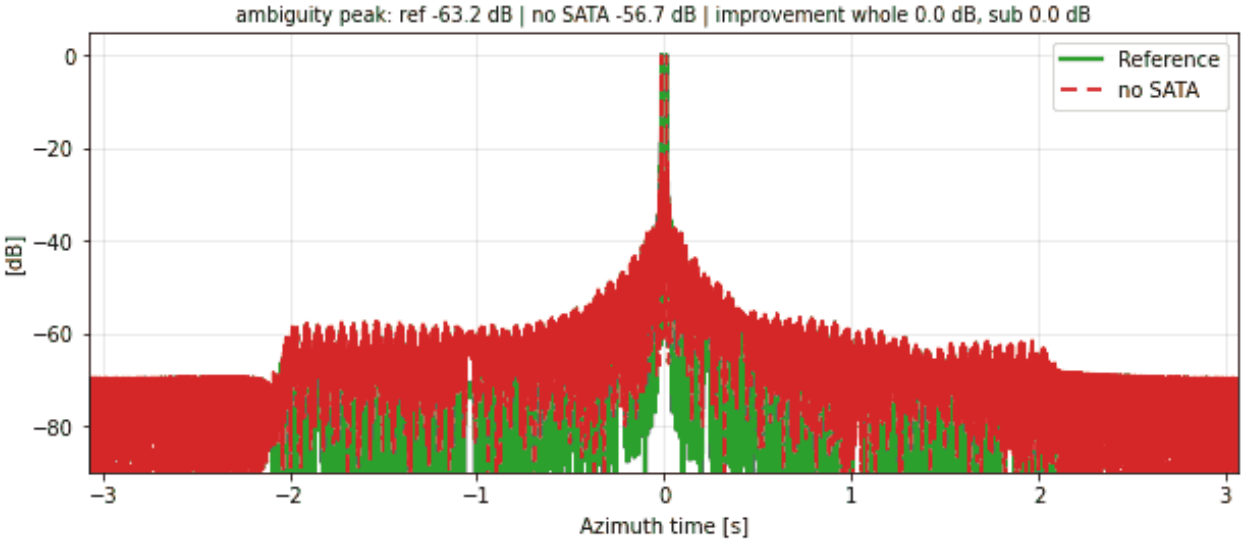



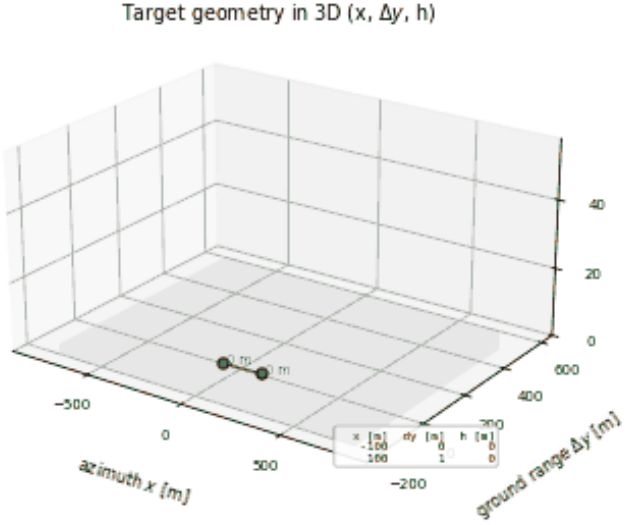



RA-SN-001 | SATA 1D | along-track ramp: N = 2, $\alpha = 0.1°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

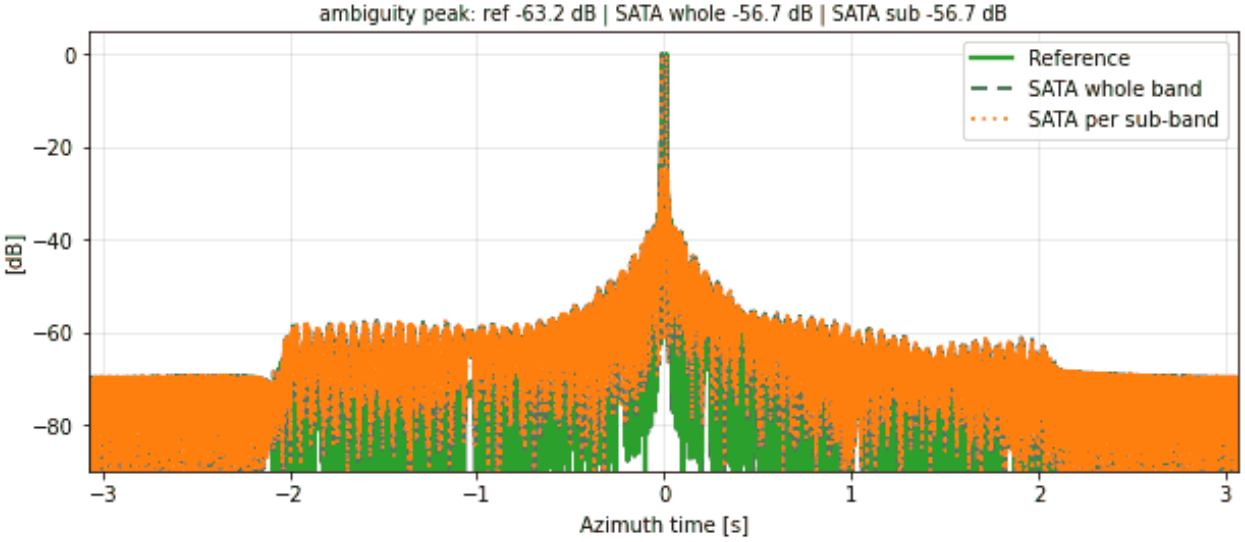


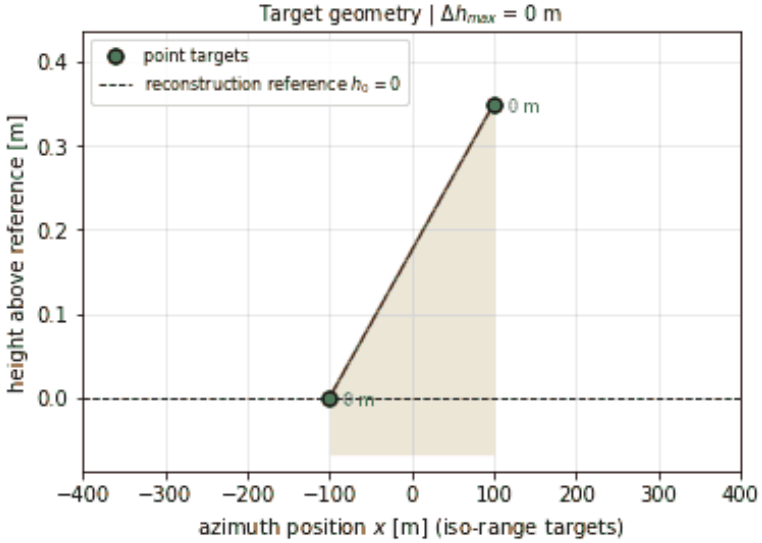



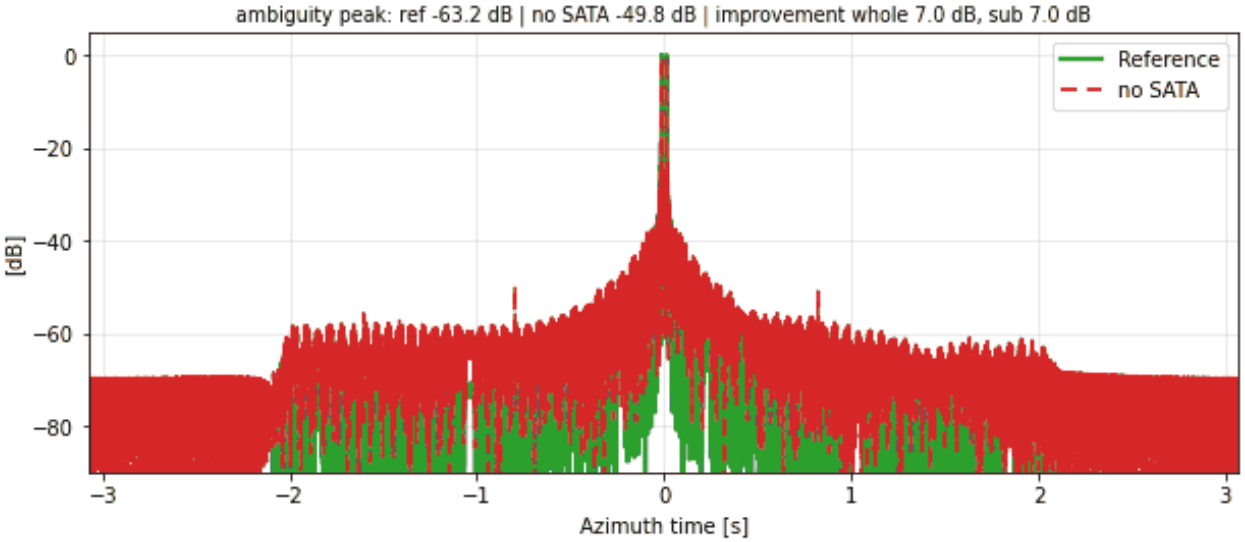



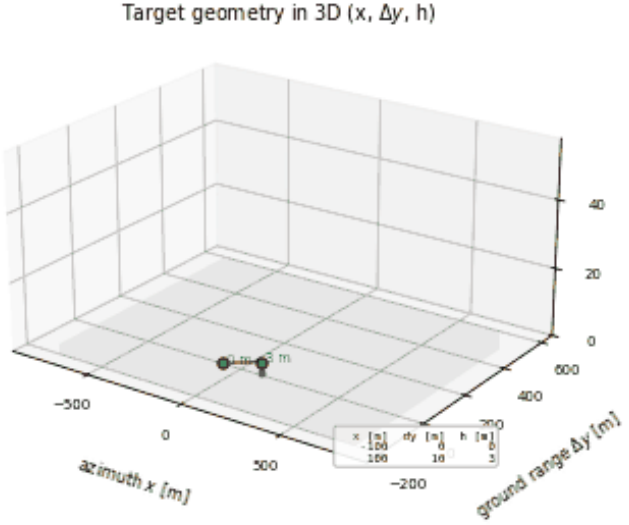



RA-SN-002 | SATA 1D | along-track ramp: N = 2, $\alpha = 1°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

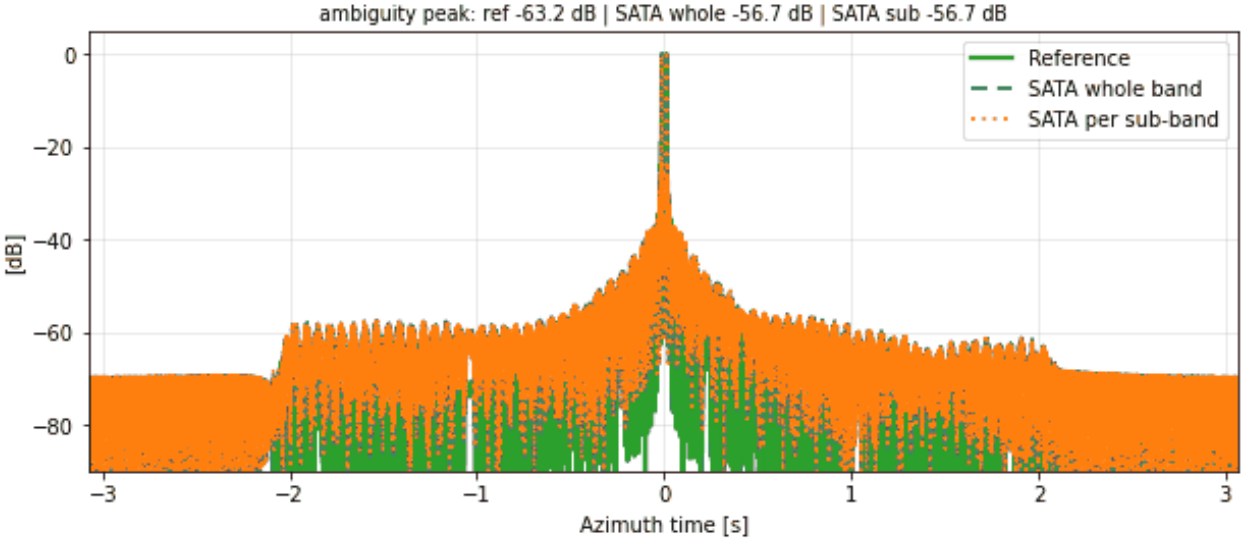


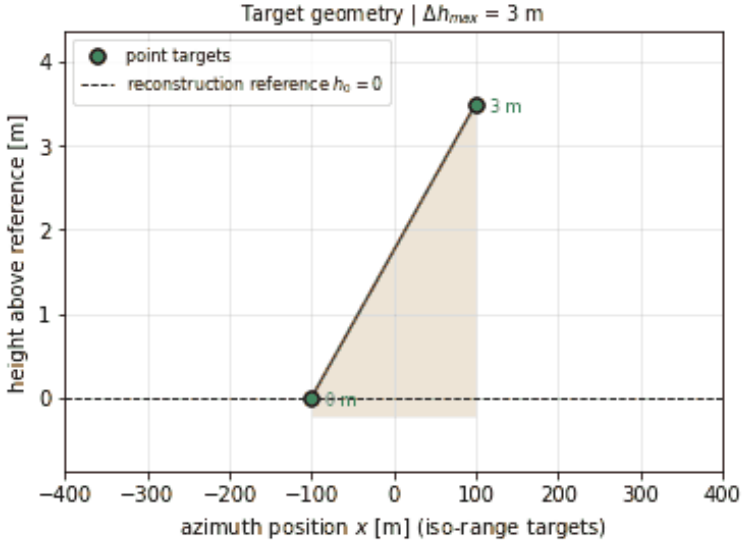



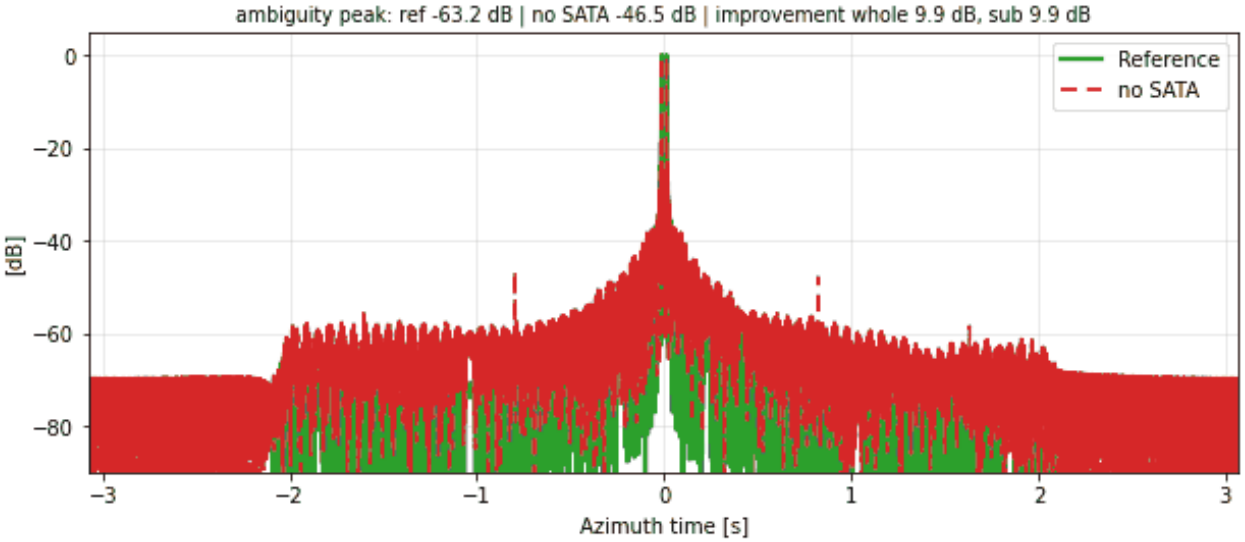



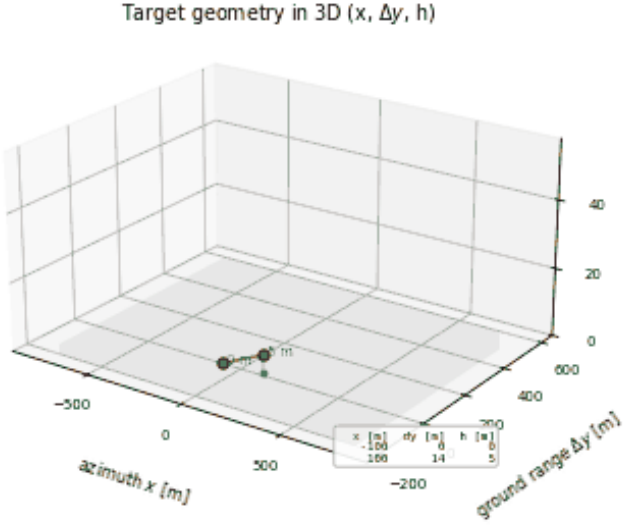



RA-SN-003 | SATA 1D | along-track ramp: N = 2, $\alpha = 1.5°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

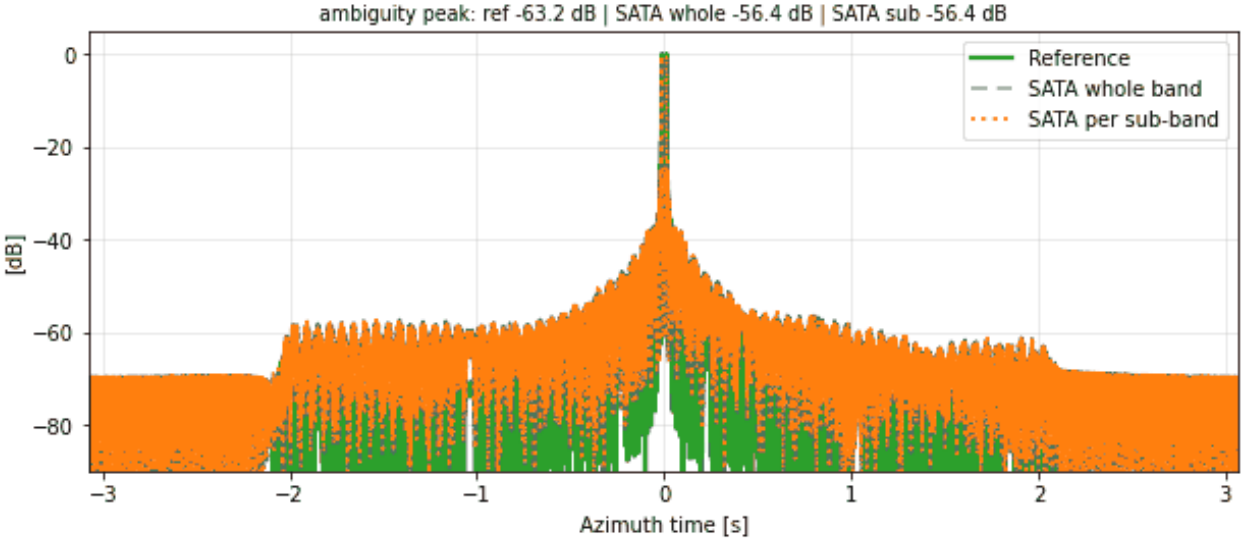


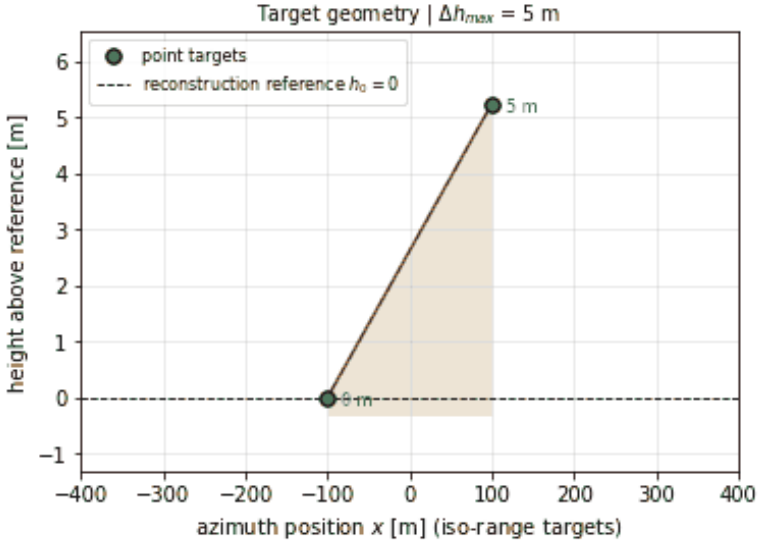



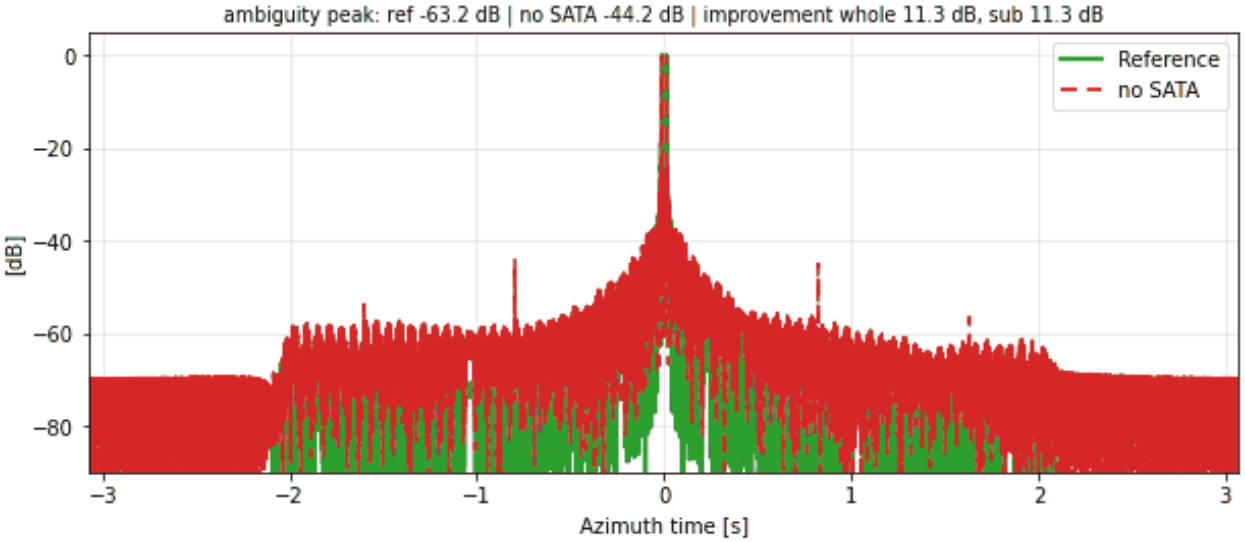



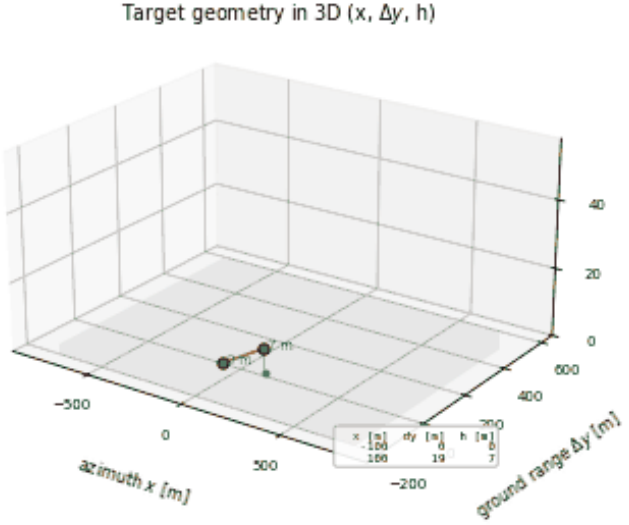



RA-SN-004 | SATA 1D | along-track ramp: N = 2, $\alpha = 2°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

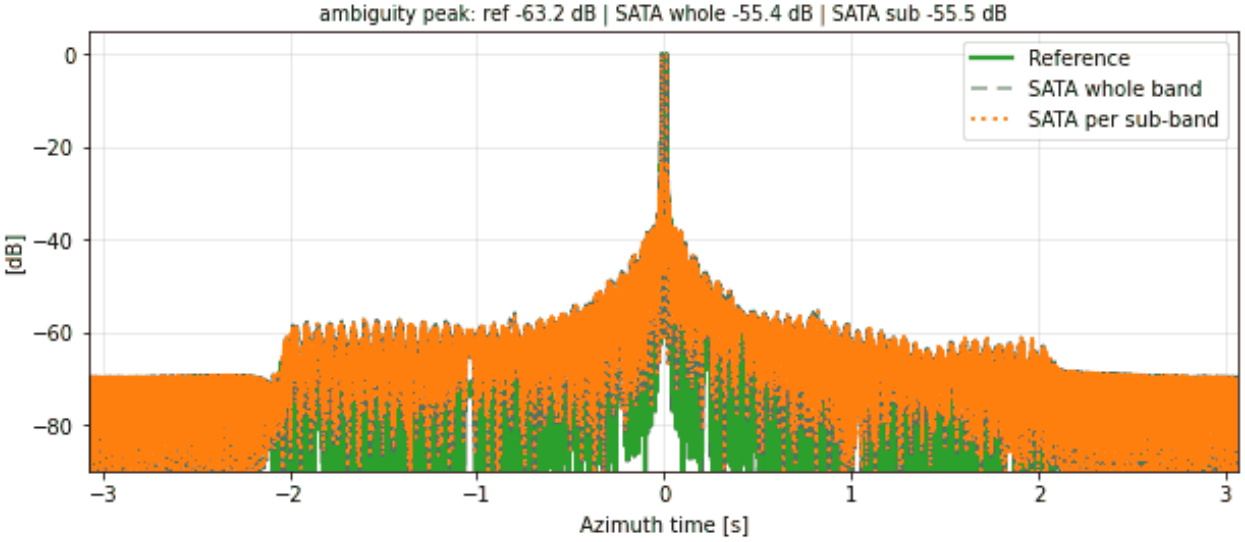


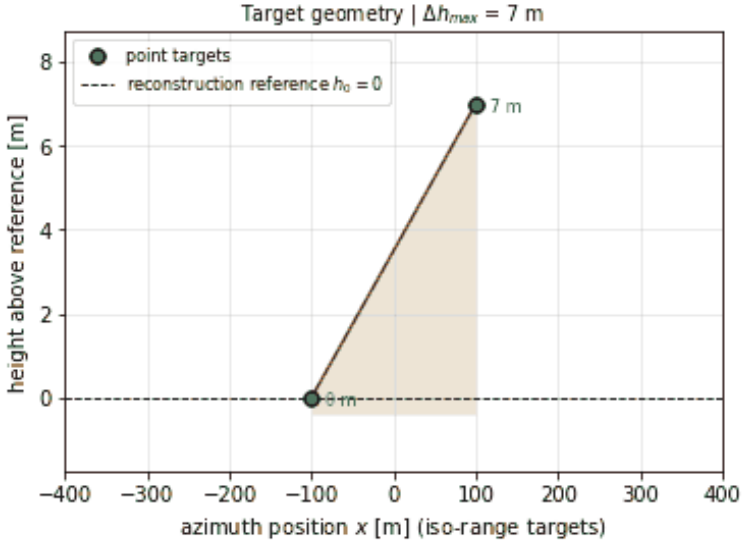



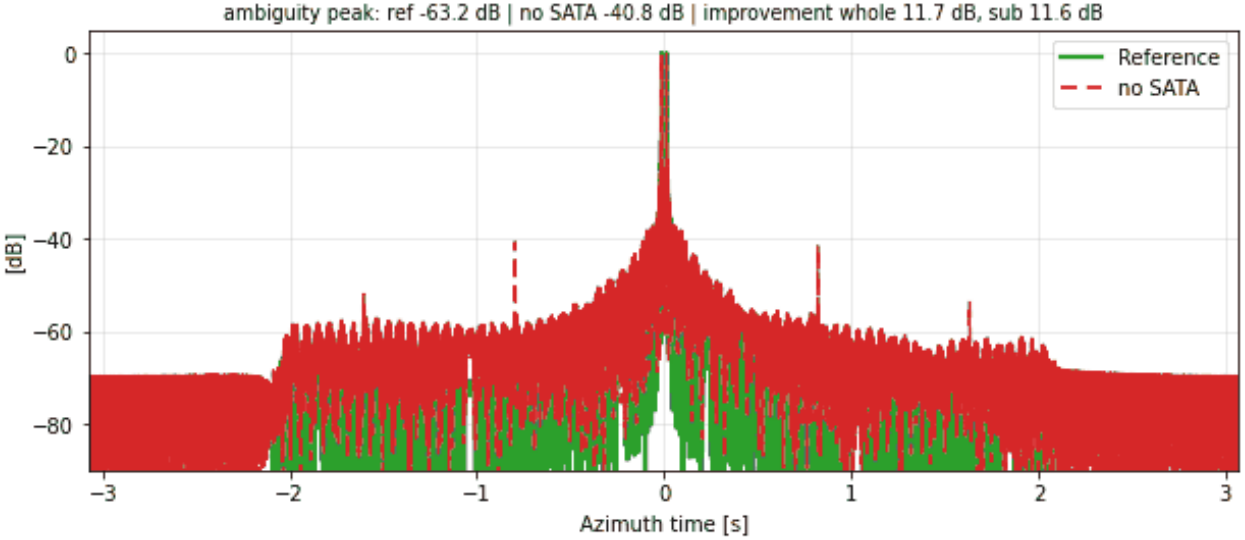



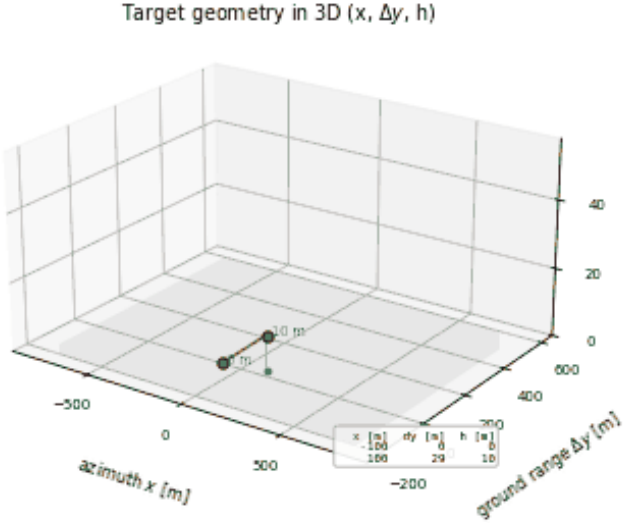



RA-SN-005 | SATA 1D | along-track ramp: N = 2, $\alpha = 3°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

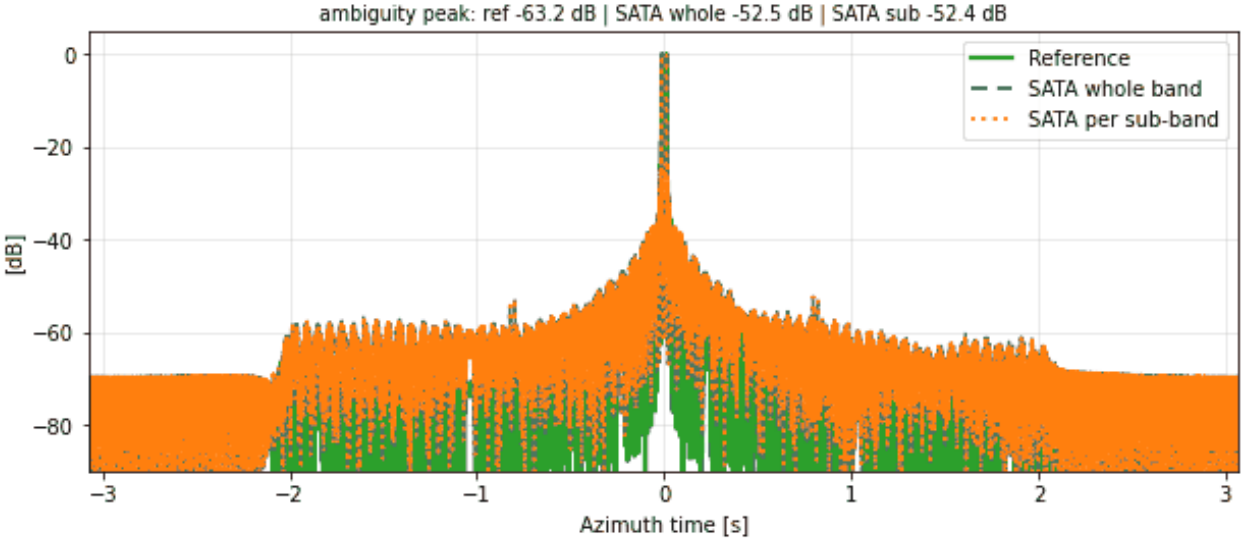


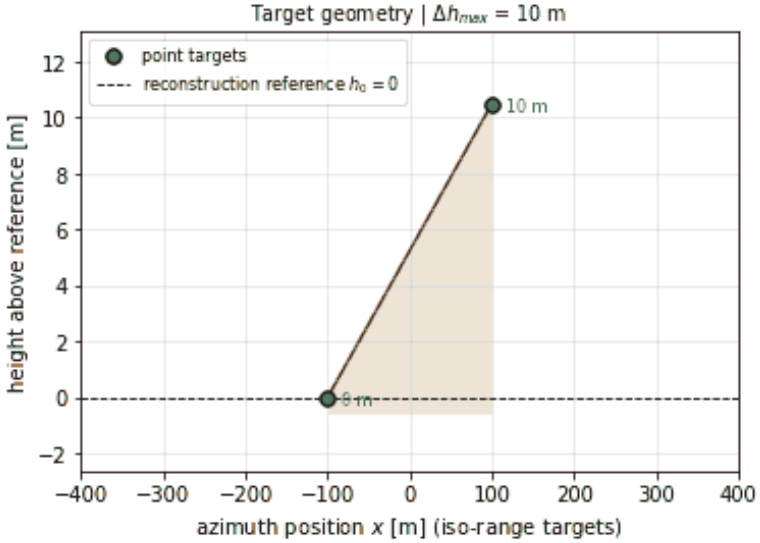



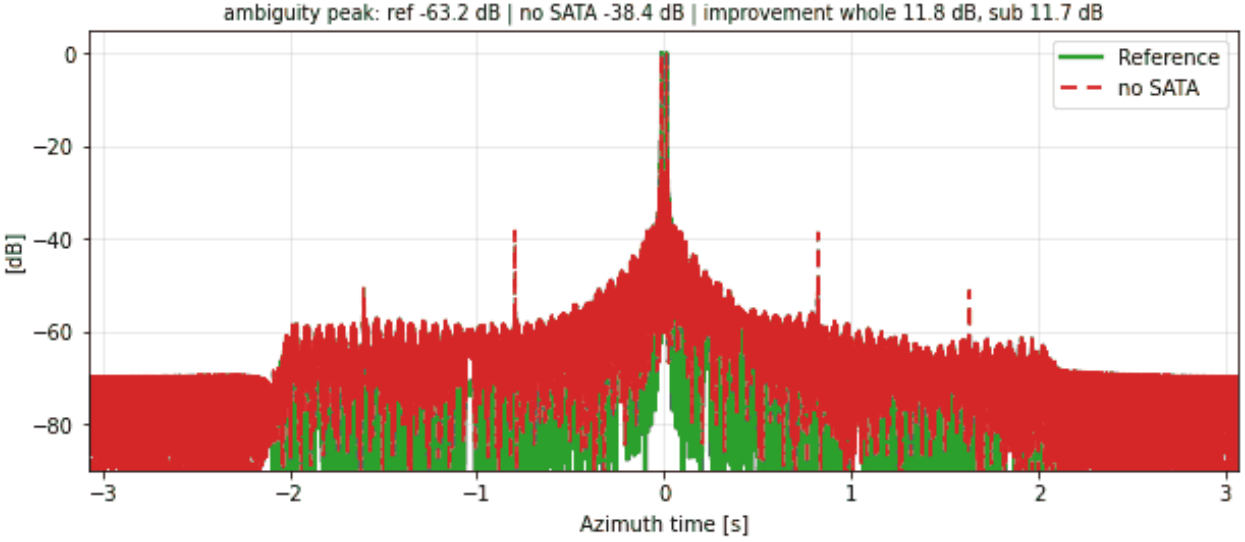



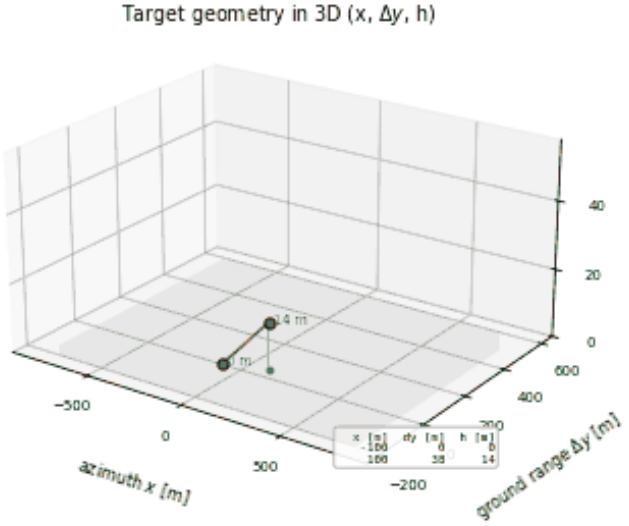



RA-SN-006 | SATA 1D | along-track ramp: N = 2, $\alpha = 4°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

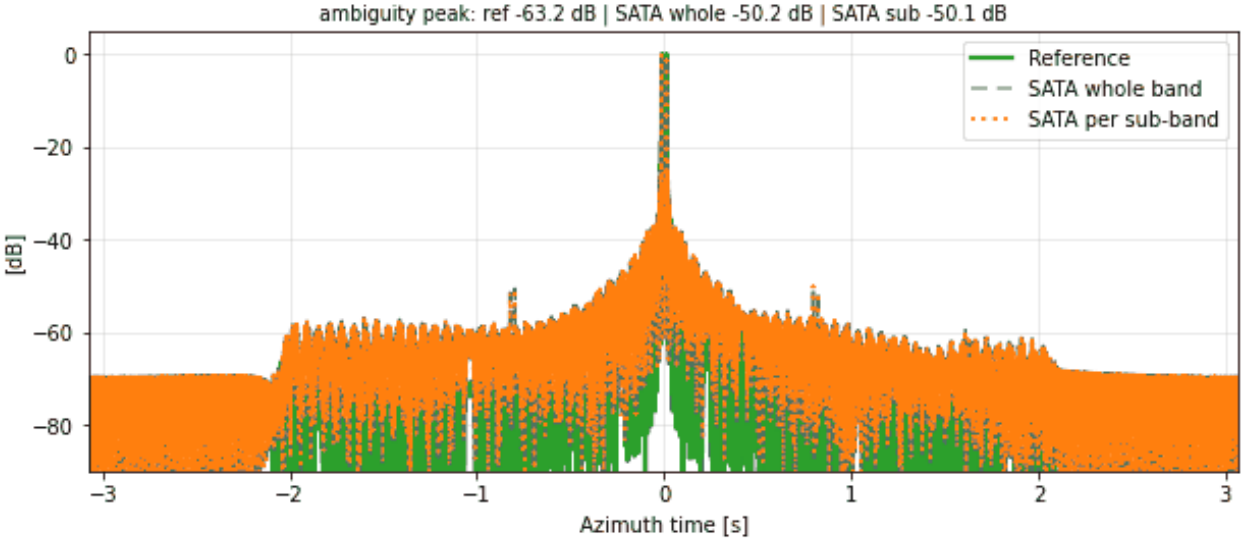


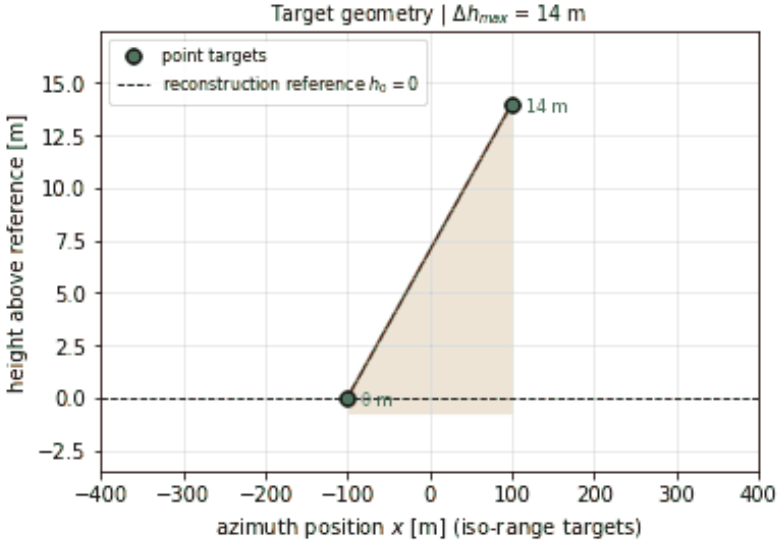



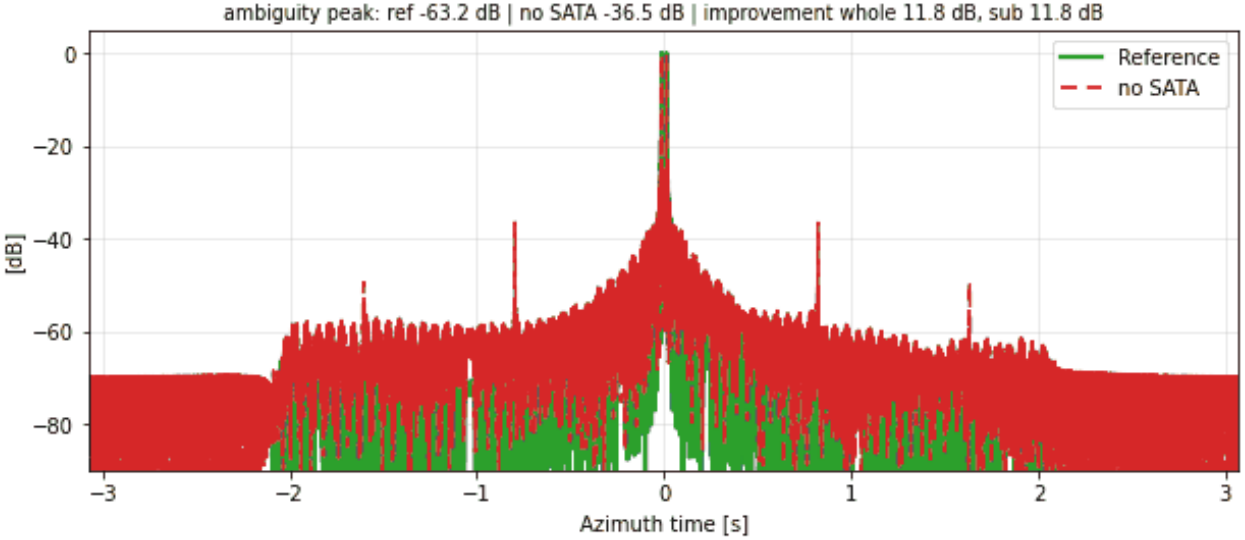



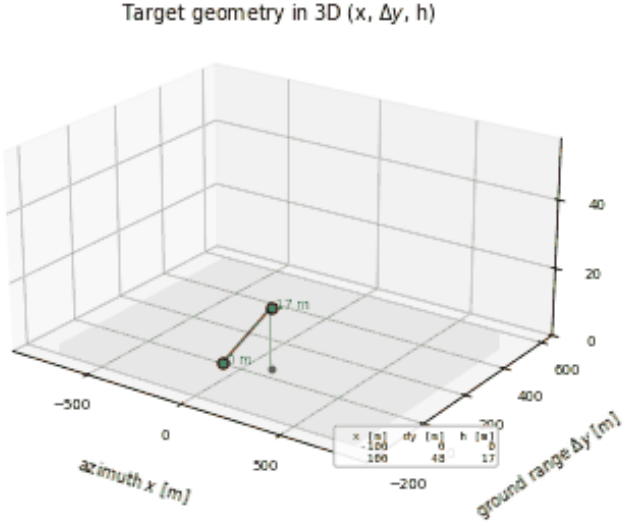



RA-SN-007 | SATA 1D | along-track ramp: N = 2, $\alpha = 5^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

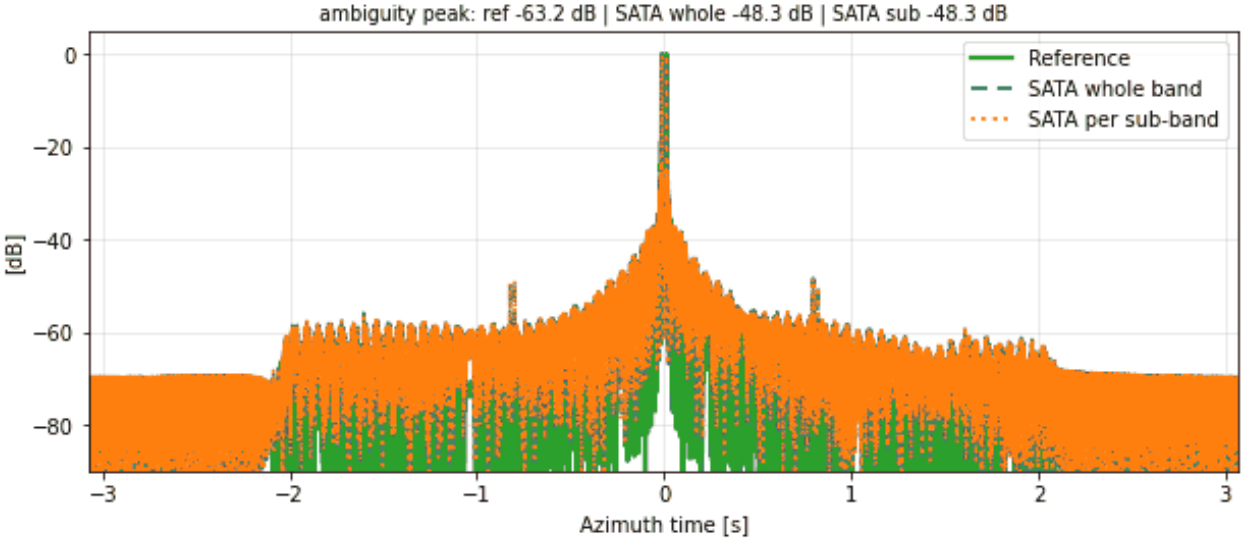


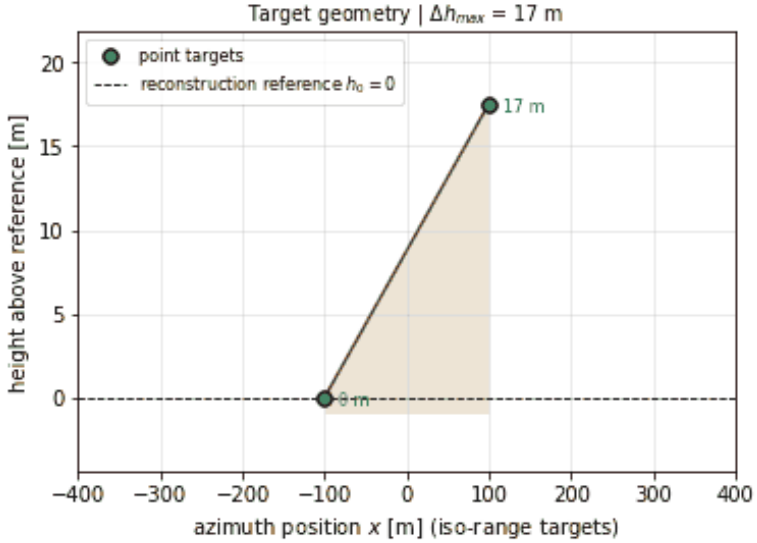



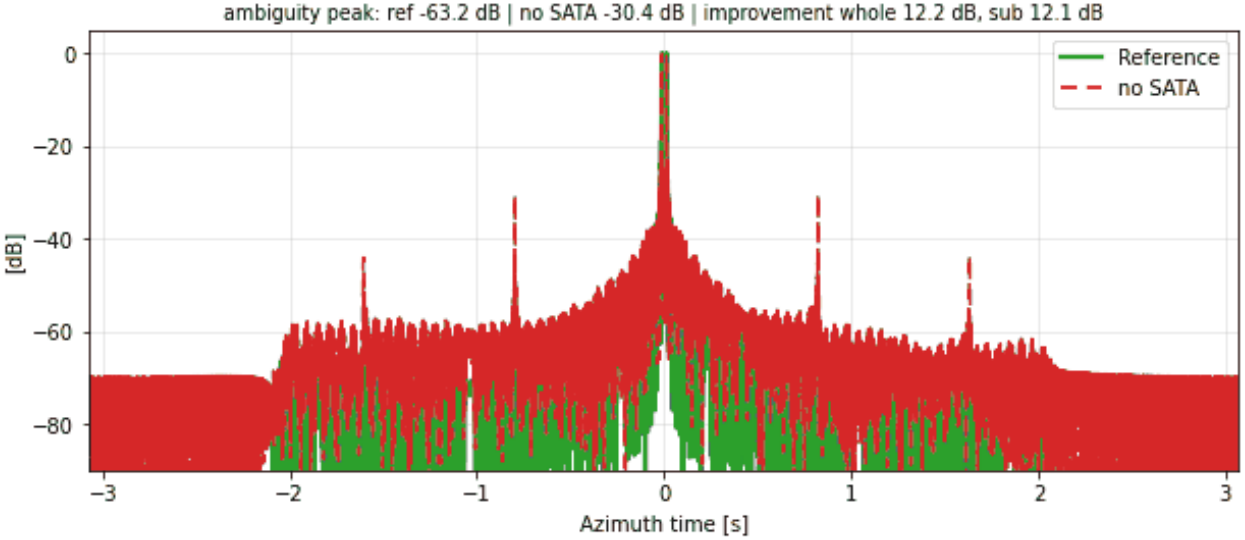



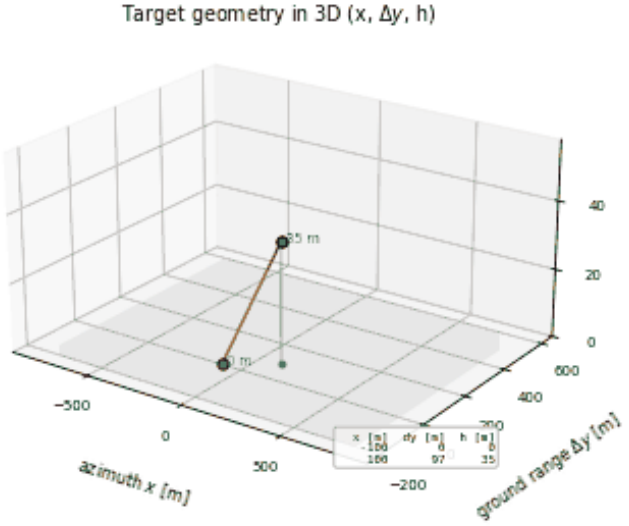



RA-SN-008 | SATA 1D | along-track ramp: N = 2, $\alpha = 10°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

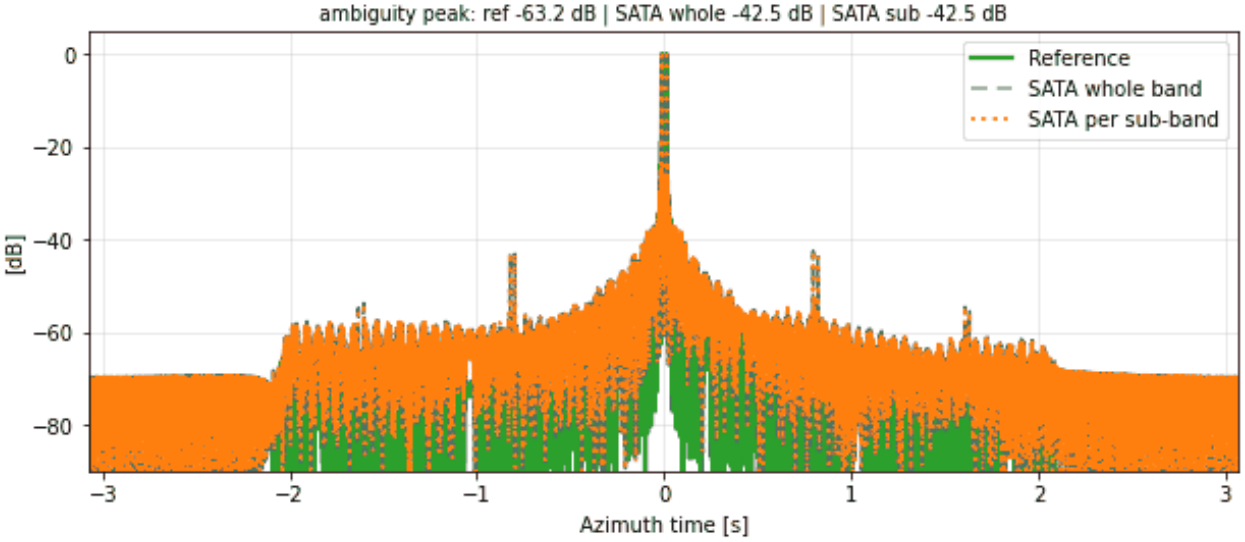


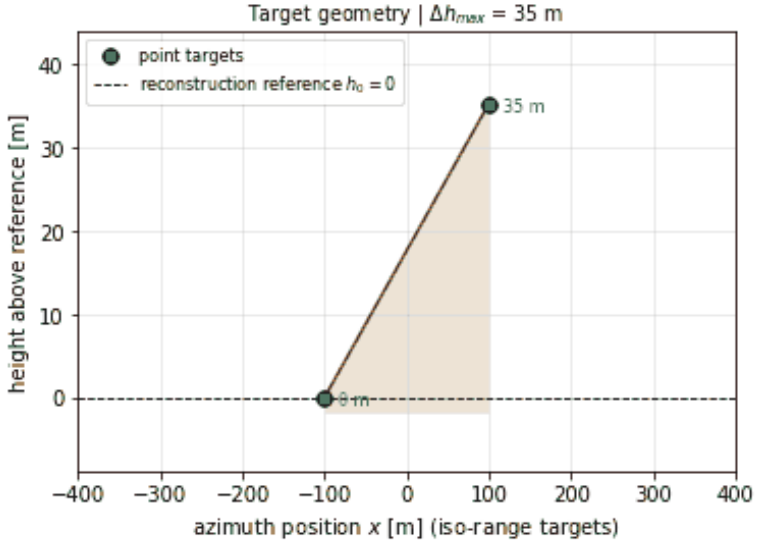



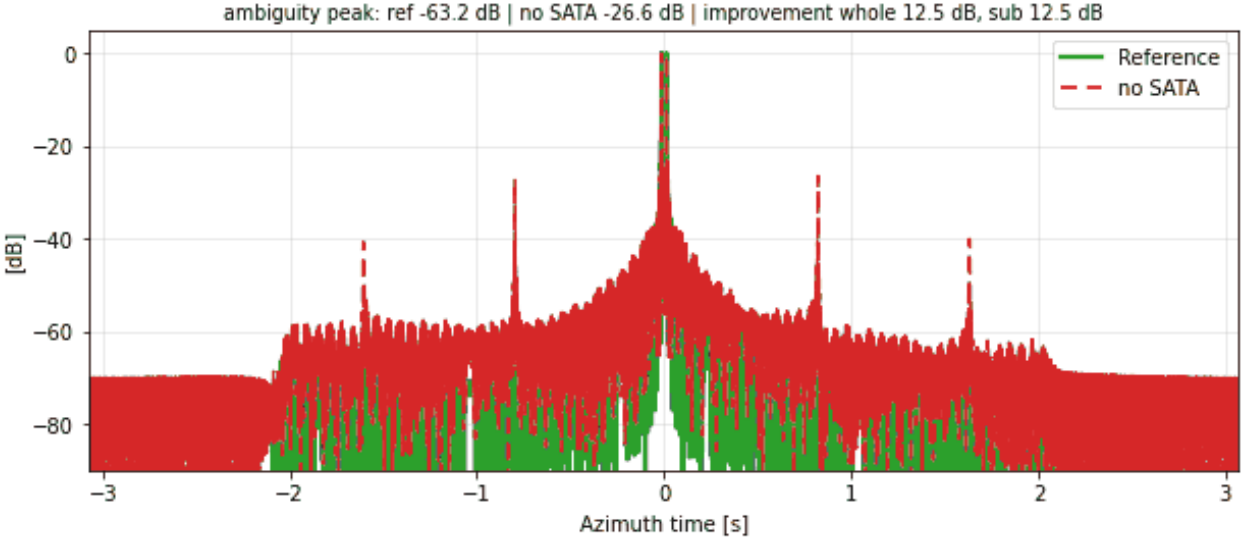



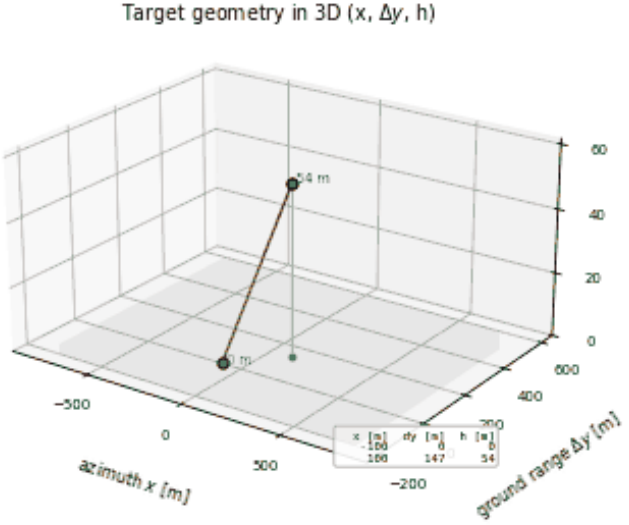



RA-SN-009 | SATA 1D | along-track ramp: N = 2, $\alpha = 15°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

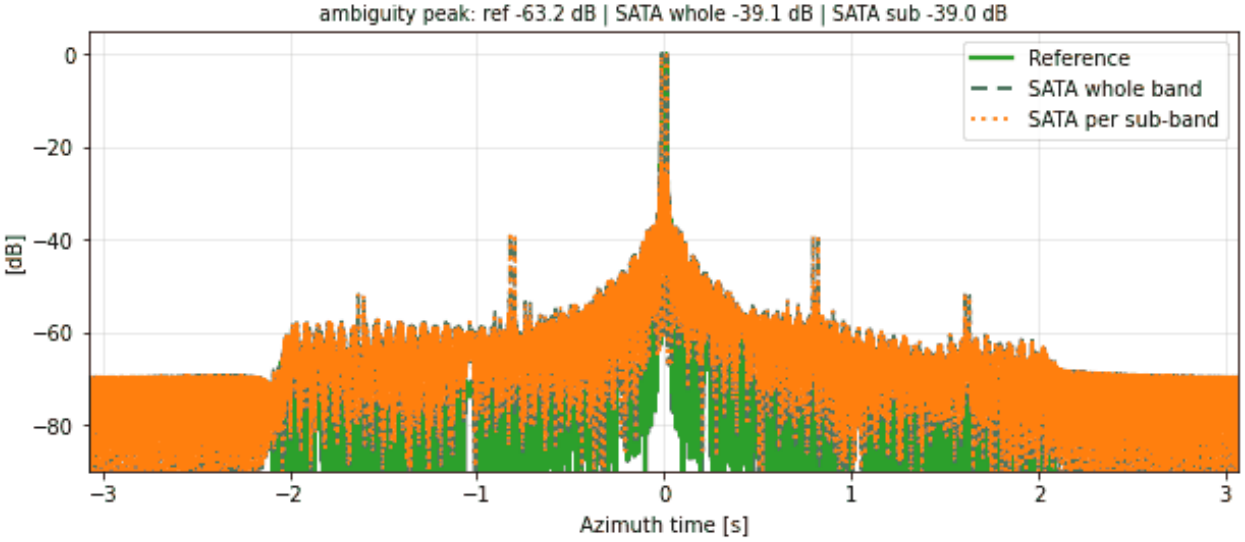


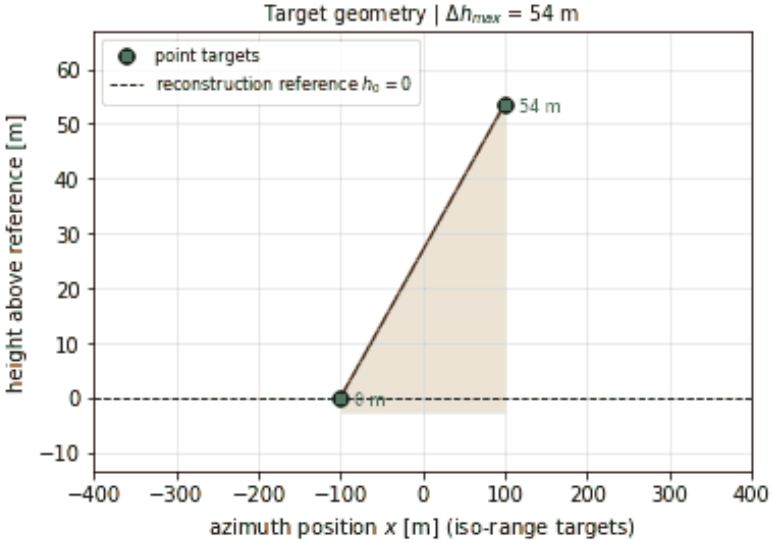



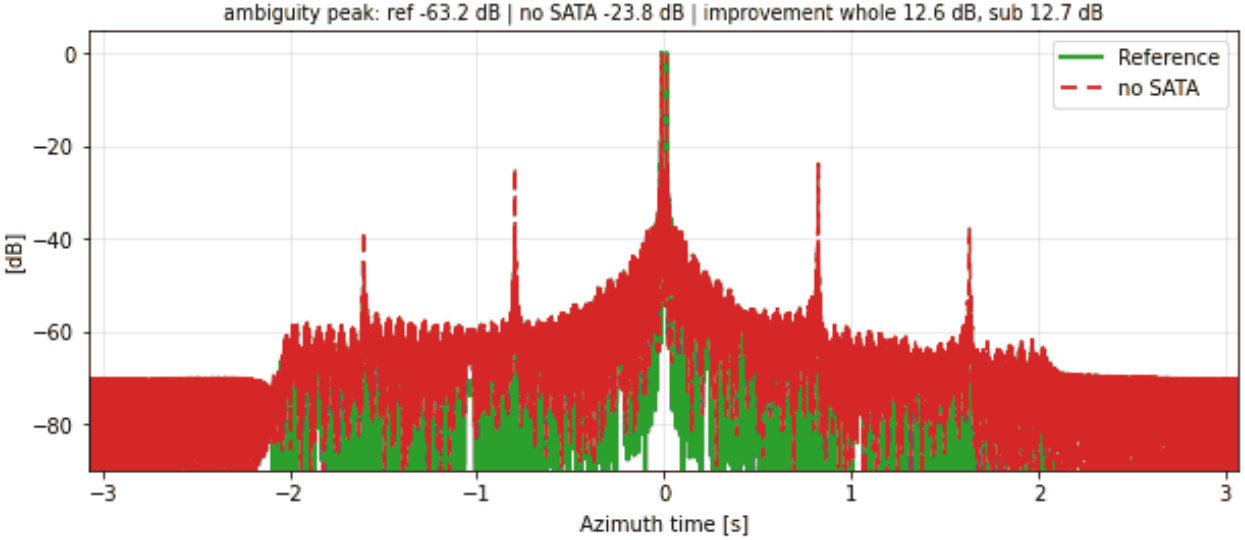



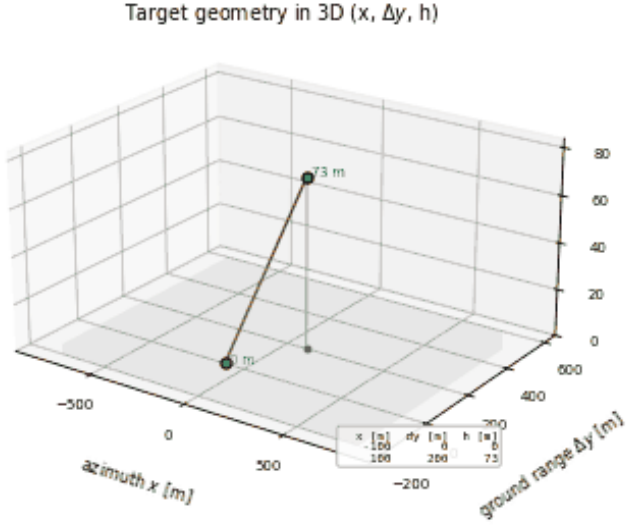



RA-SN-010 | SATA 1D | along-track ramp: N = 2, $\alpha = 20°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

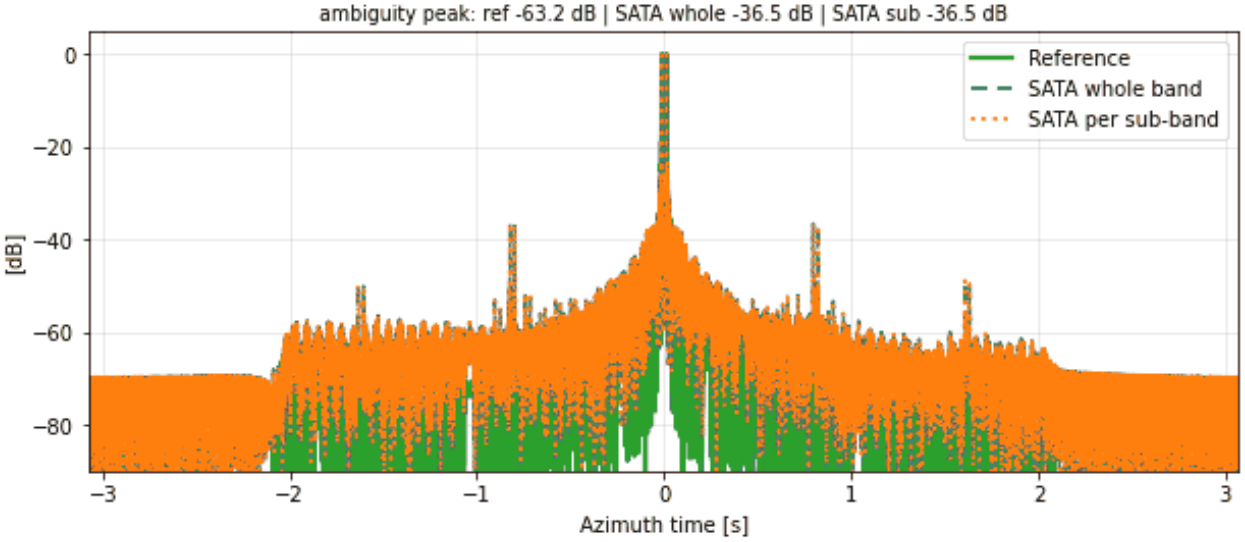


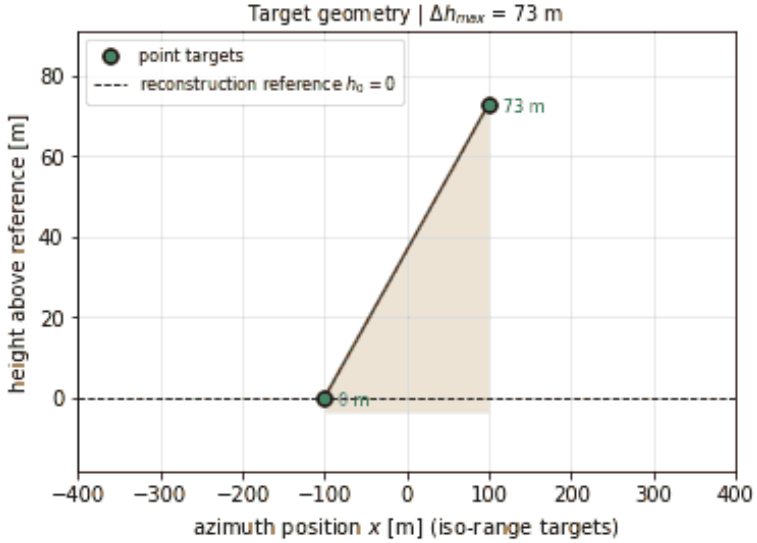



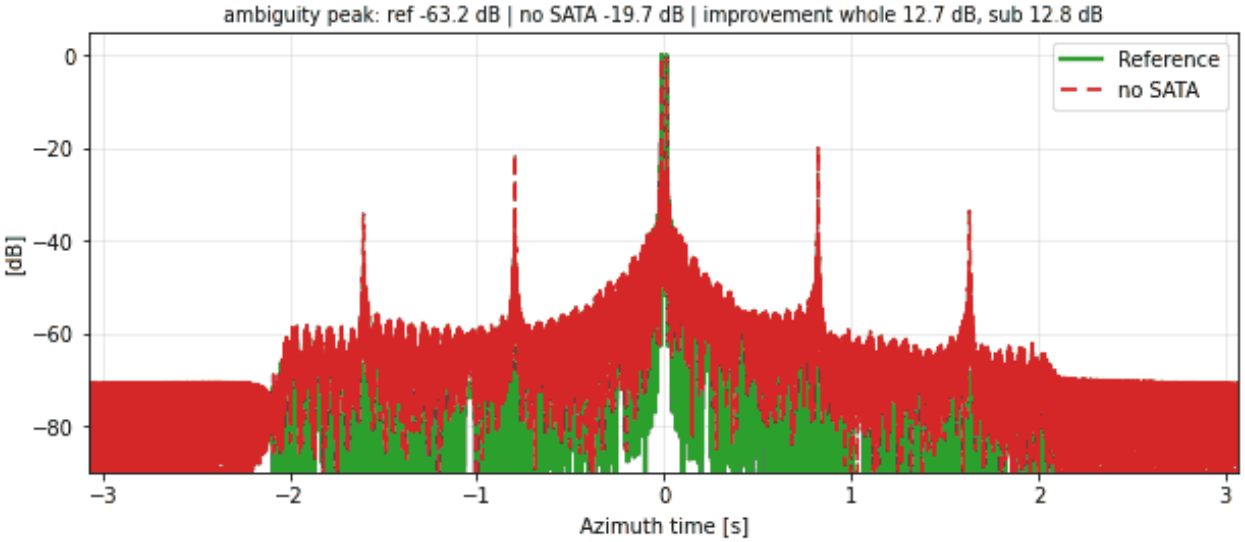



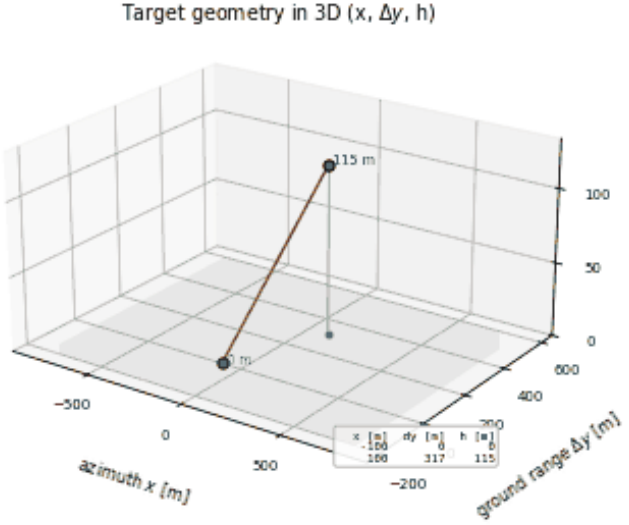



RA-SN-011 | SATA 1D | along-track ramp: N = 2, $\alpha = 30°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

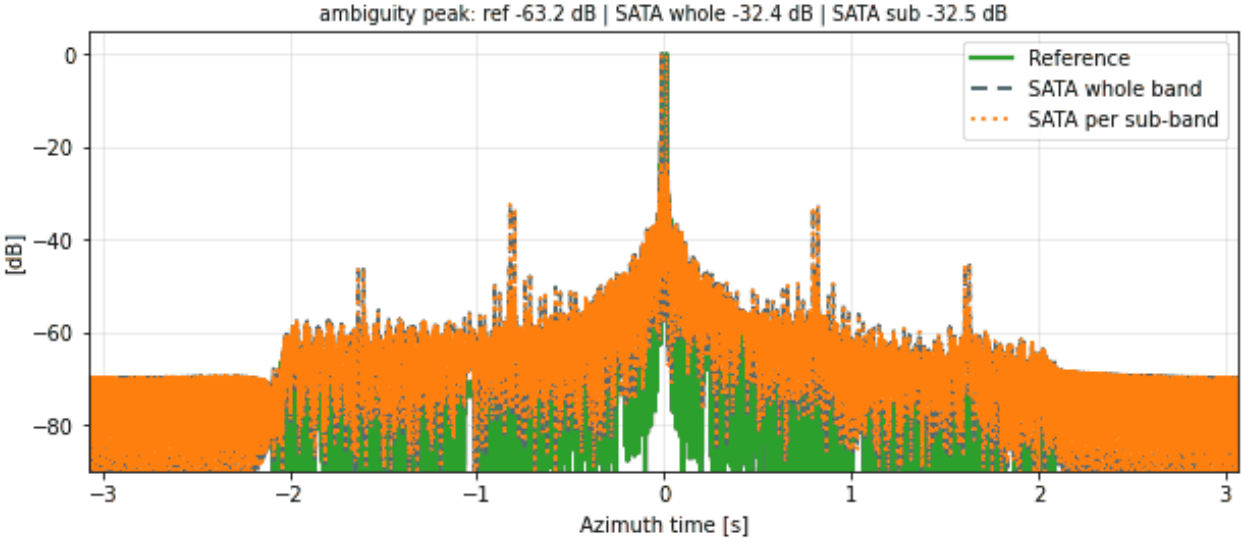


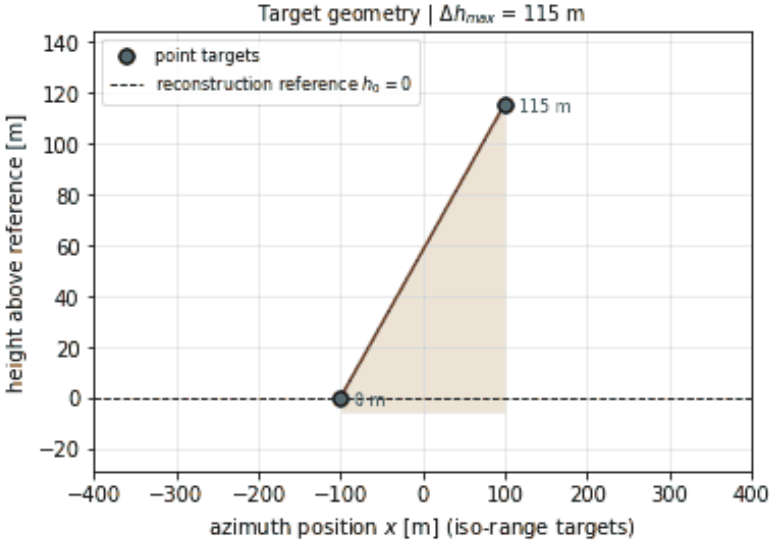



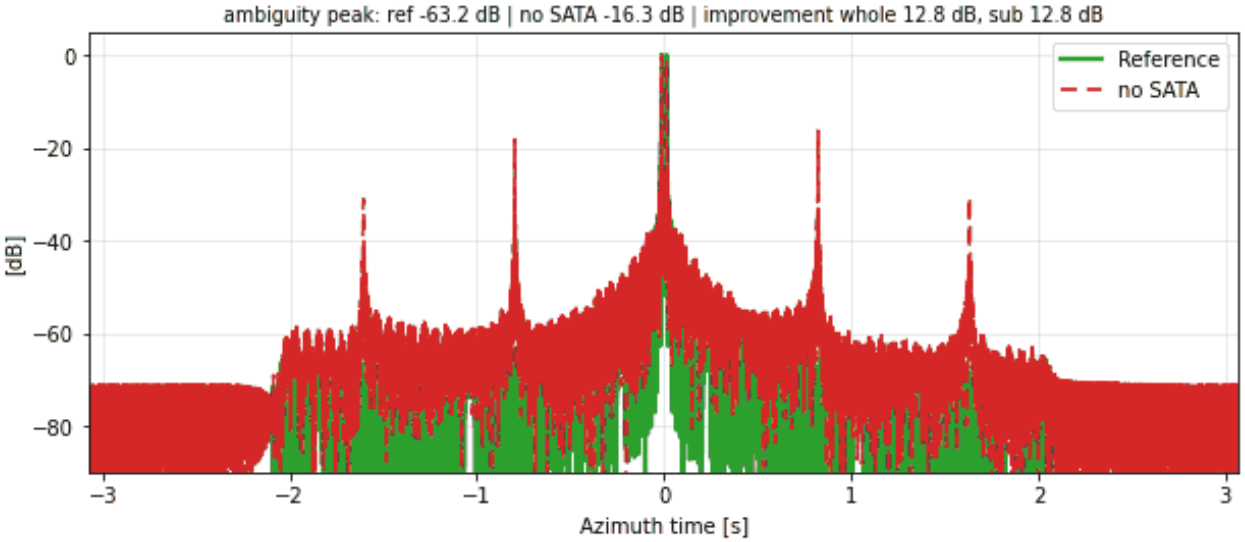



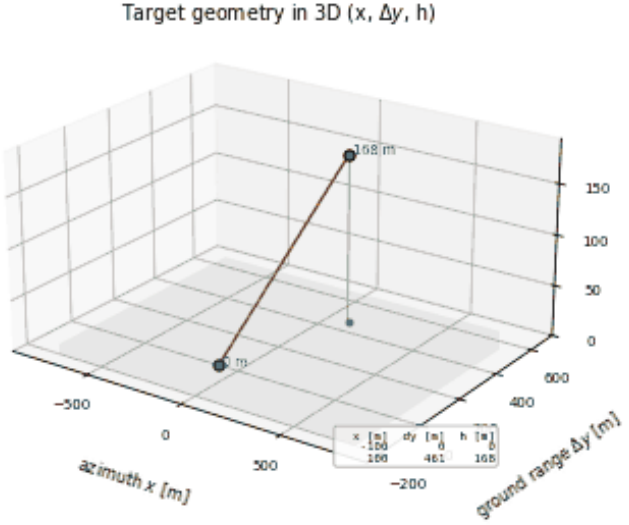



RA-SN-012 | SATA 1D | along-track ramp: N = 2, $\alpha = 40°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

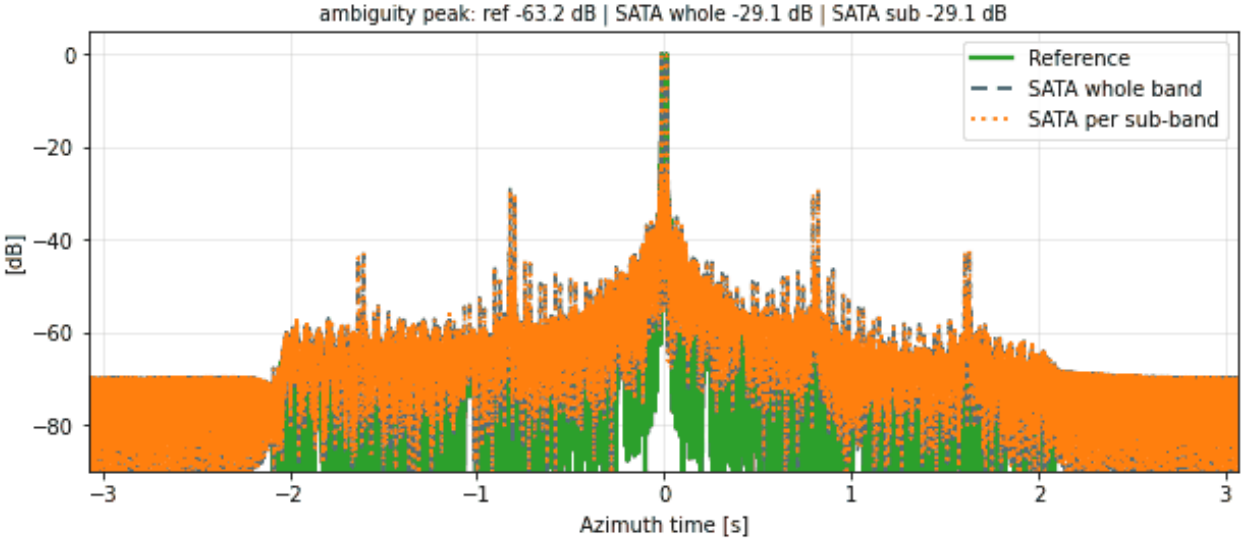


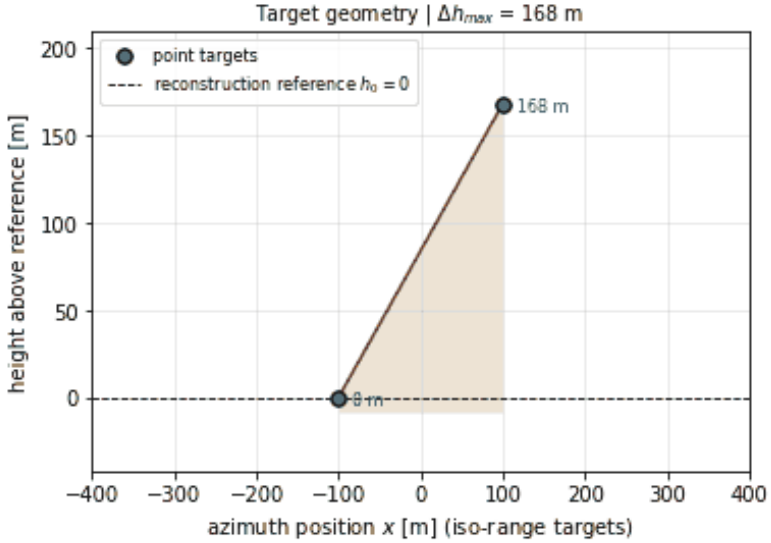



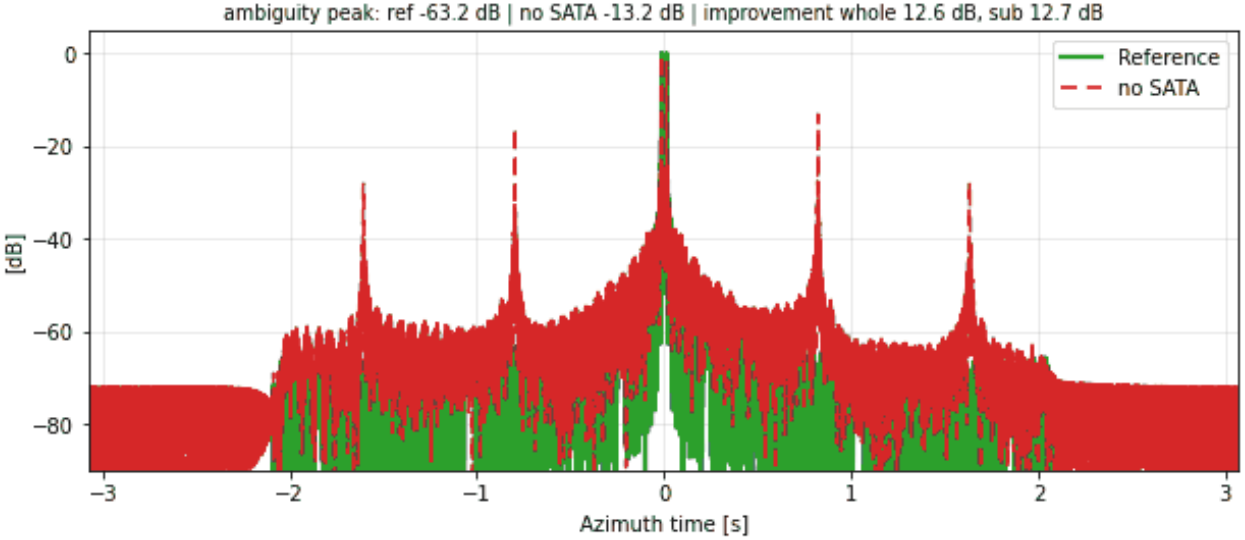



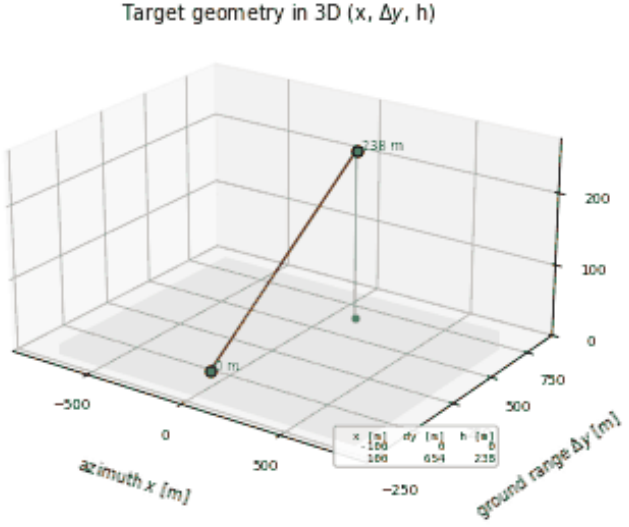



RA-SN-013 | SATA 1D | along-track ramp: N = 2, $\alpha = 50°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

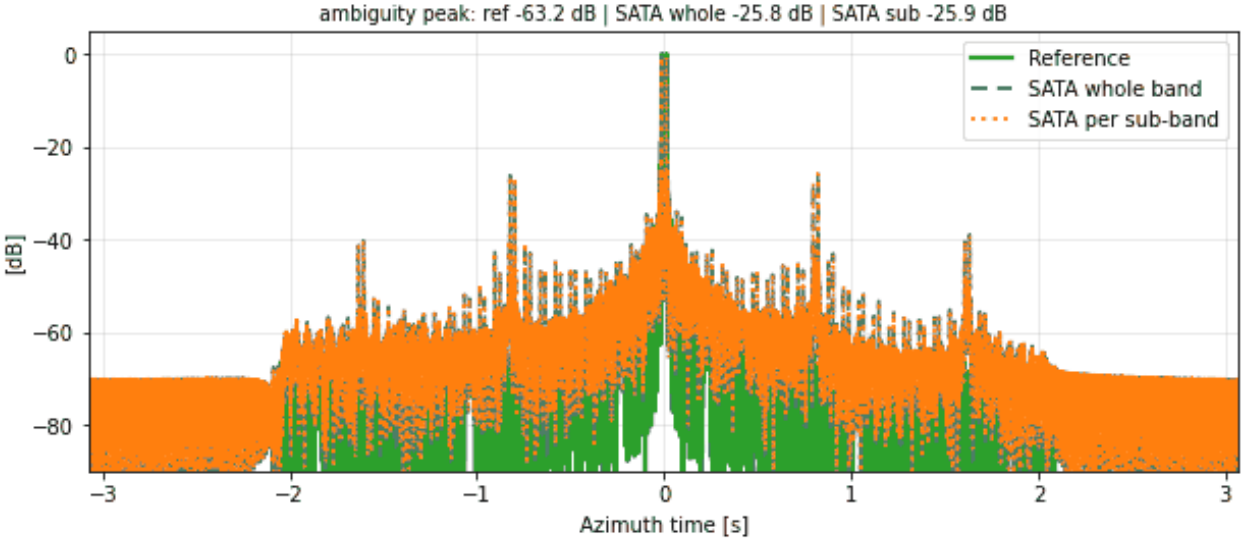


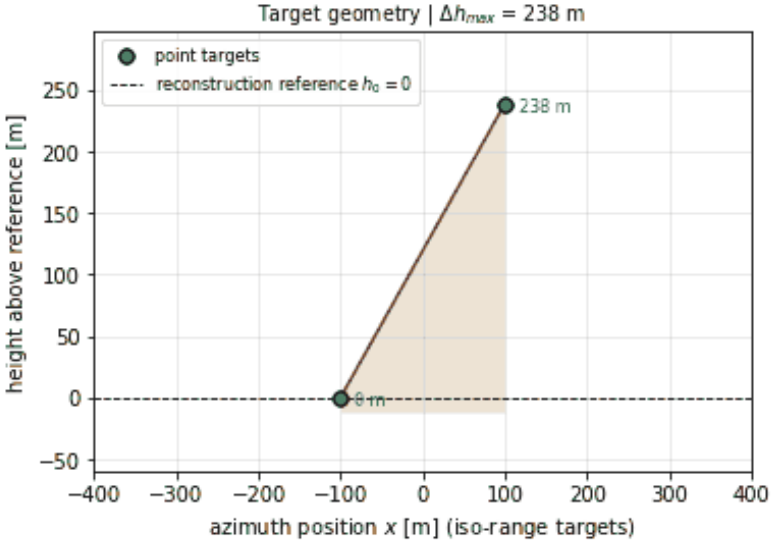



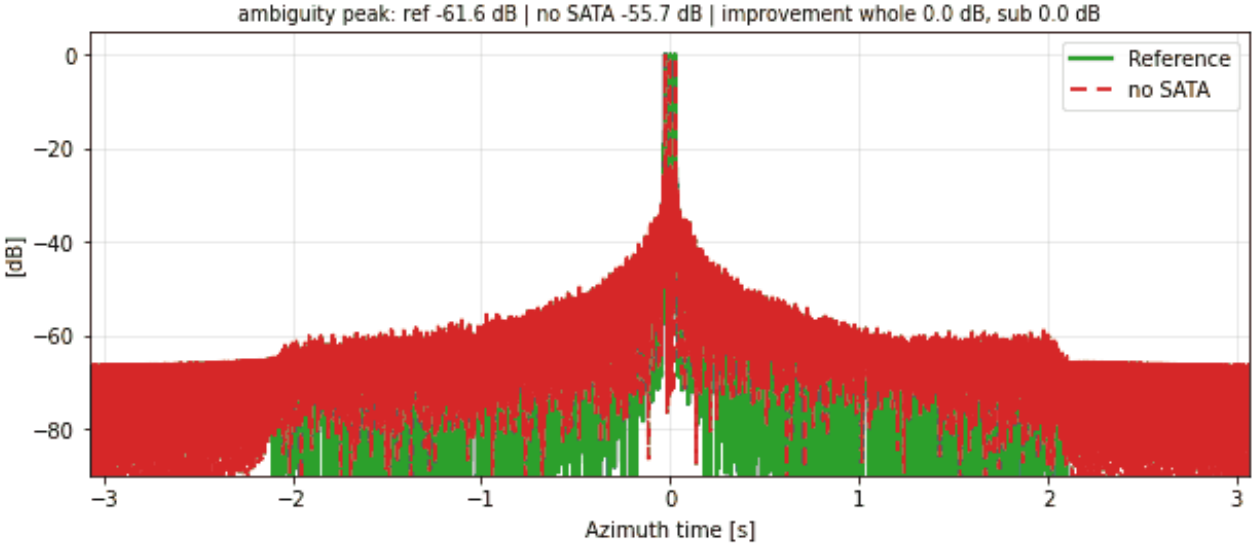



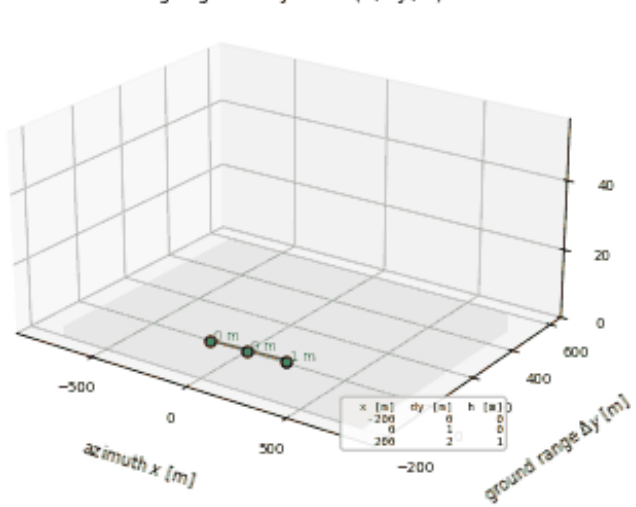



RA-SN-014 | SATA 1D | along-track ramp: N = 3, $\alpha = 0.1^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

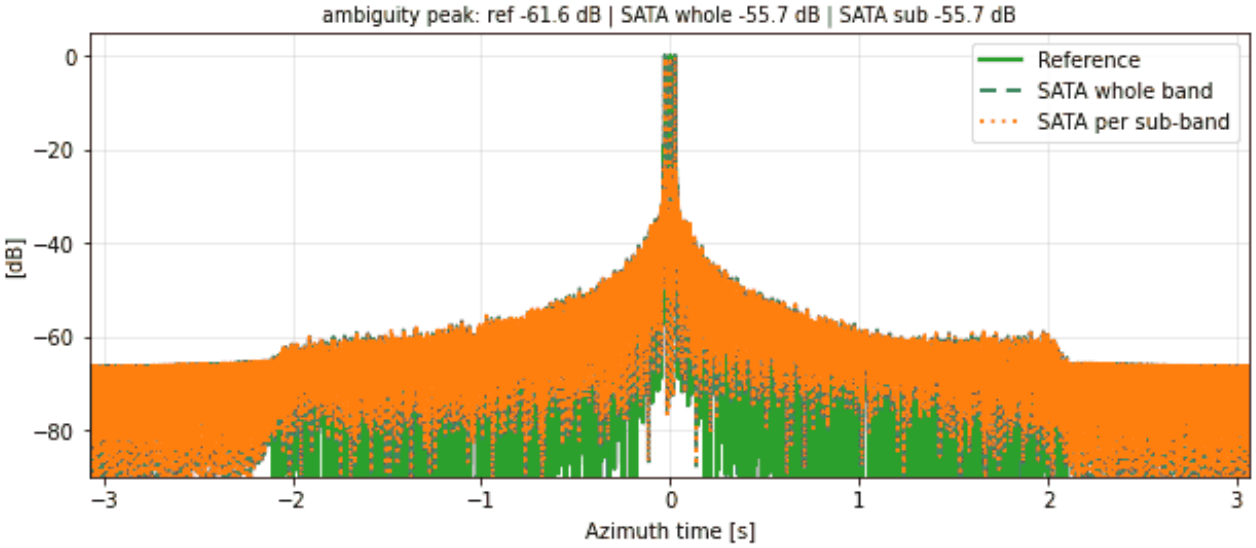


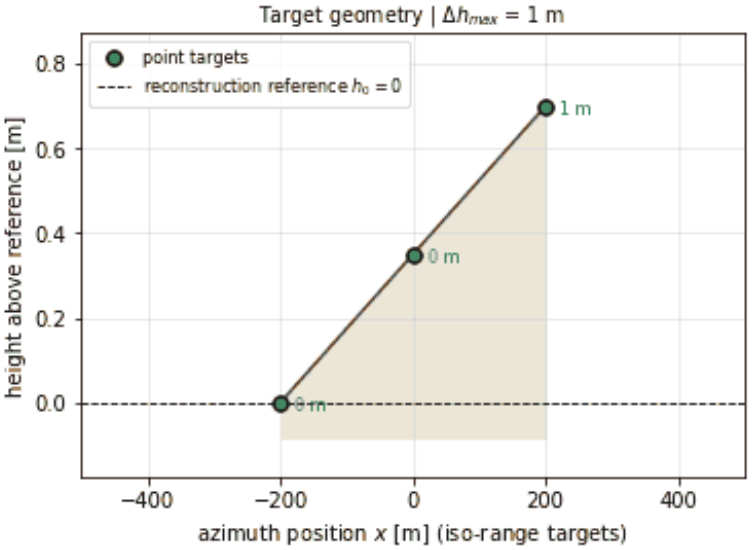



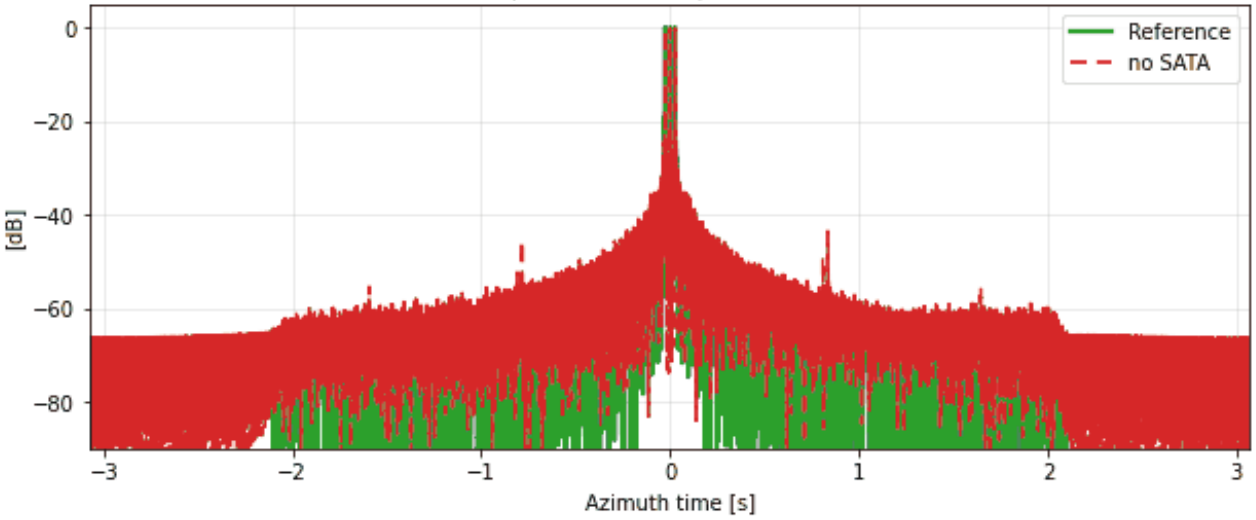



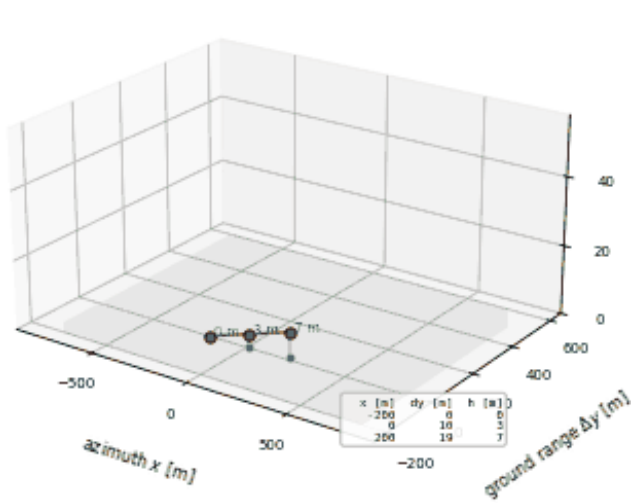



RA-SN-015 | SATA 1D | along-track ramp: N = 3, $\alpha = 1°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

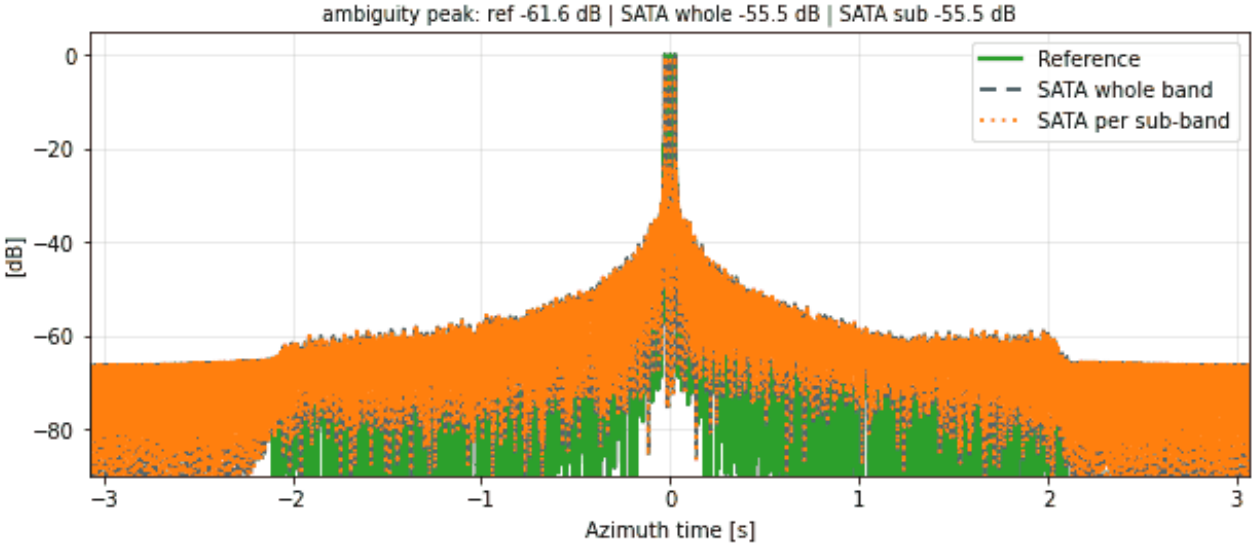


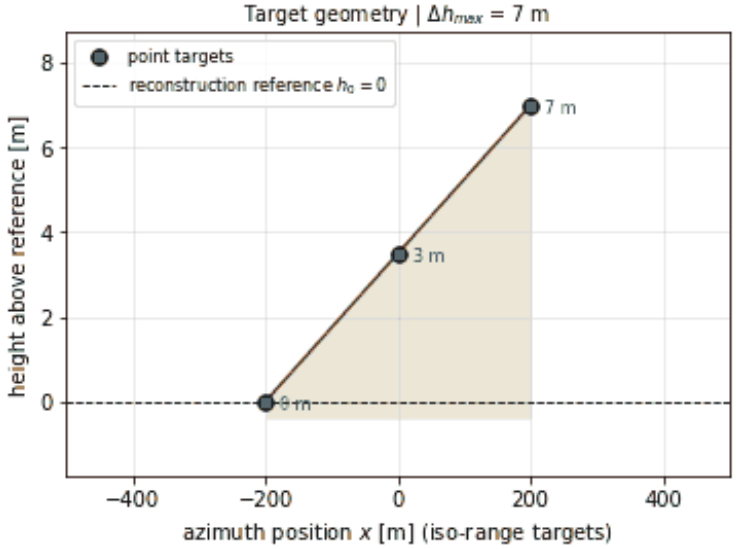



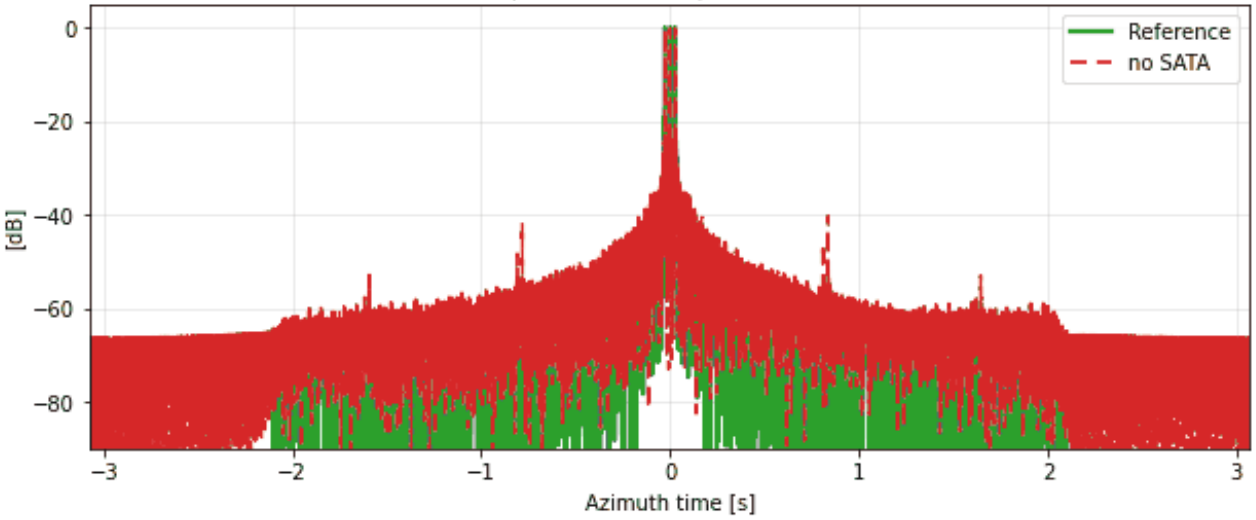



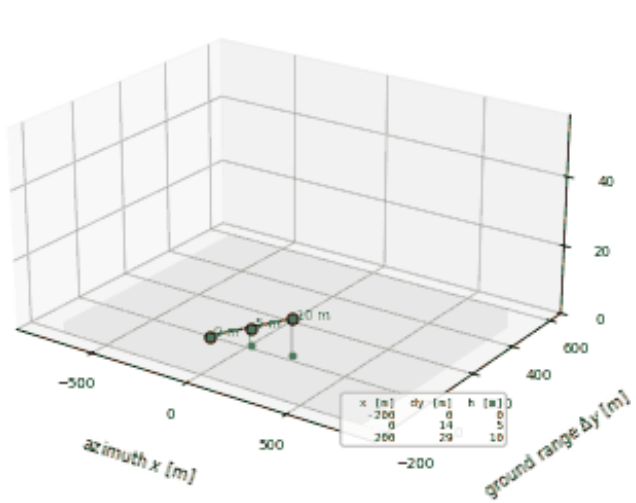



RA-SN-016 | SATA 1D | along-track ramp: N = 3, $\alpha = 1.5°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

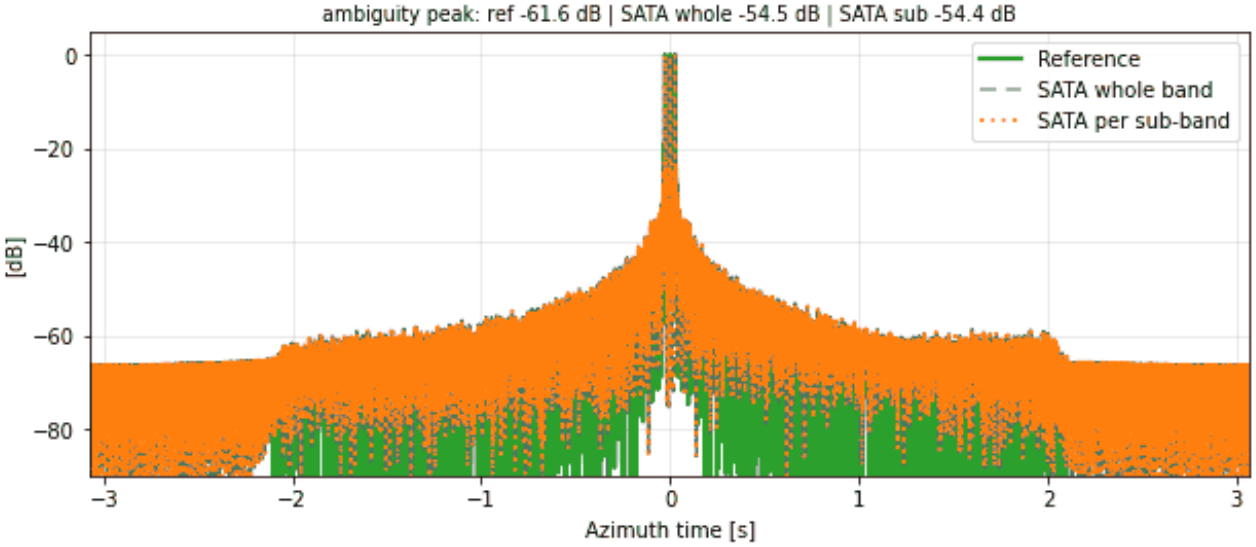


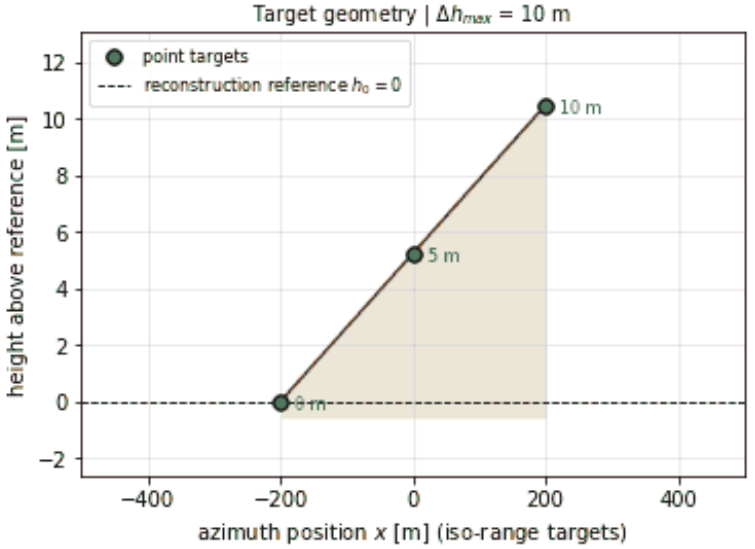



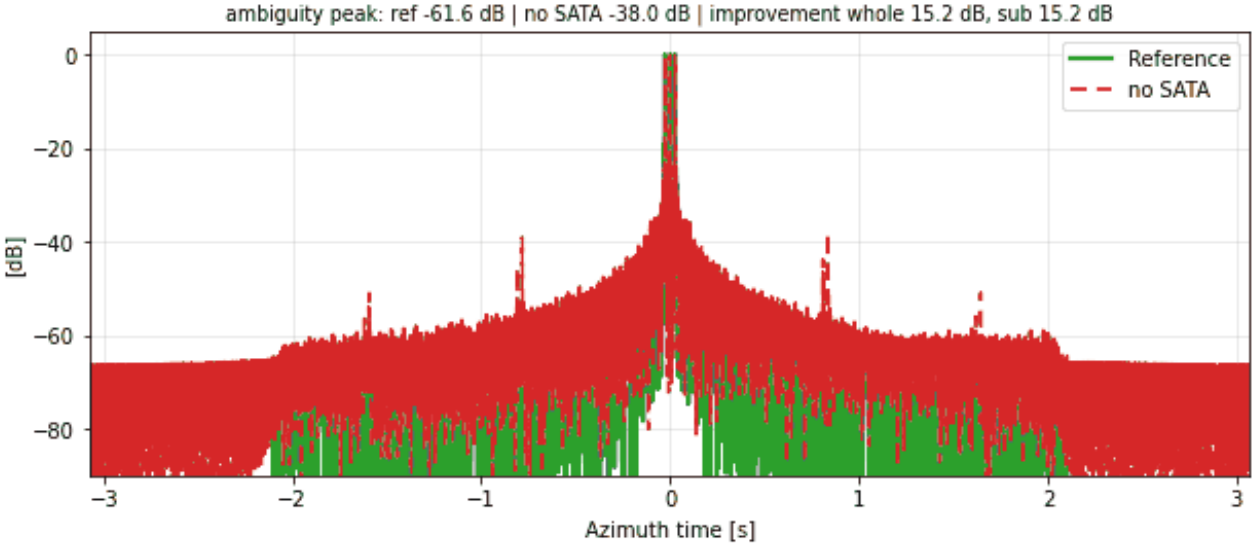



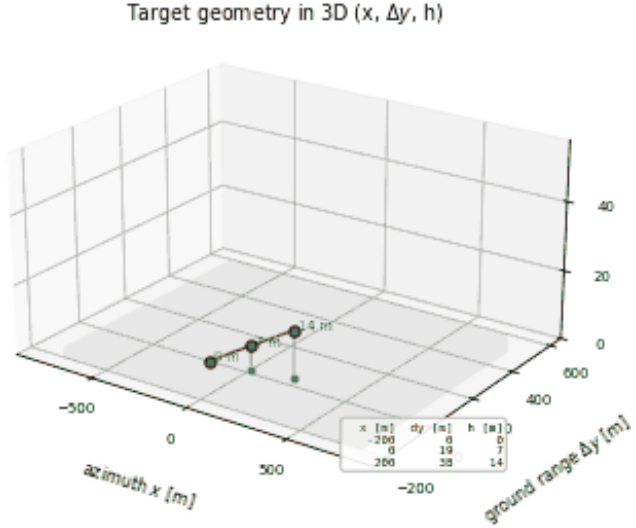



RA-SN-017 | SATA 1D | along-track ramp: N = 3, $\alpha = 2^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

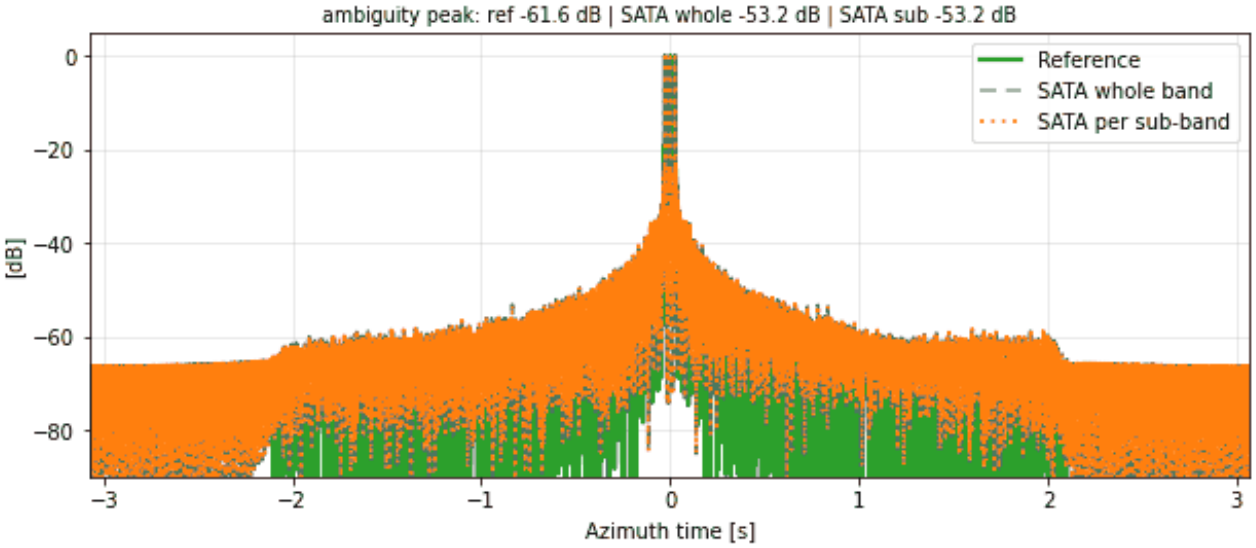


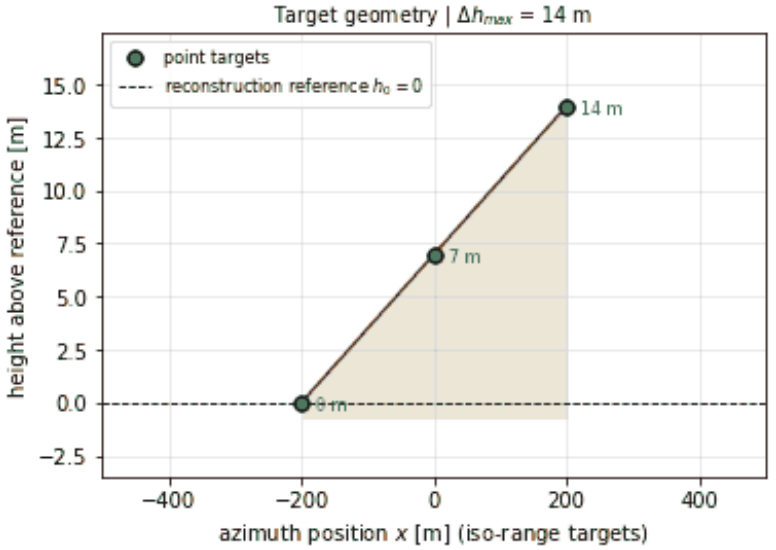



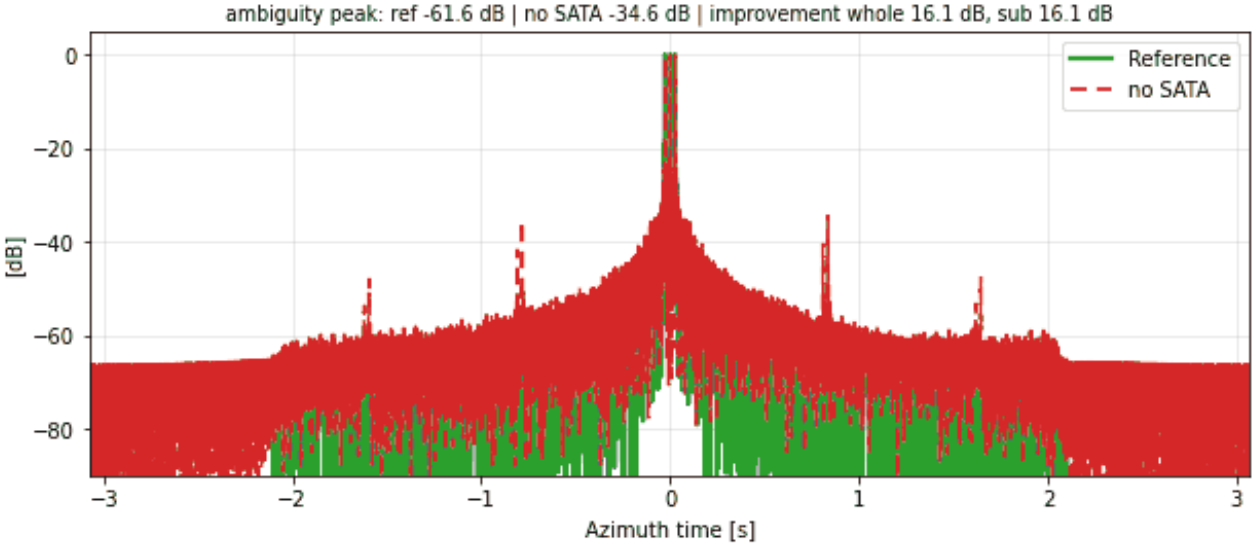



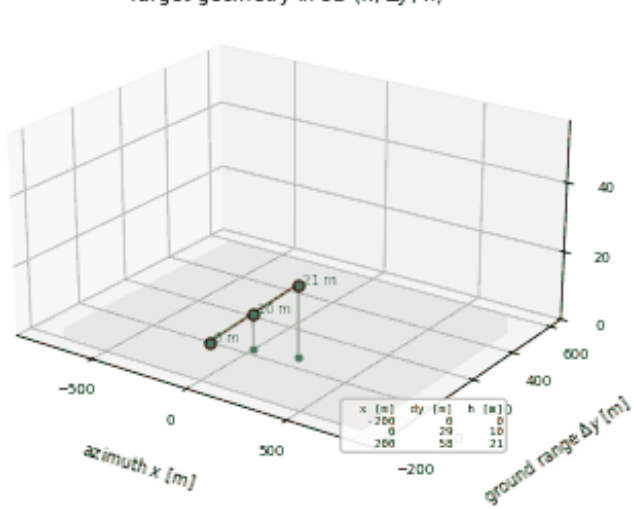



RA-SN-018 | SATA 1D | along-track ramp: N = 3, $\alpha = 3°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

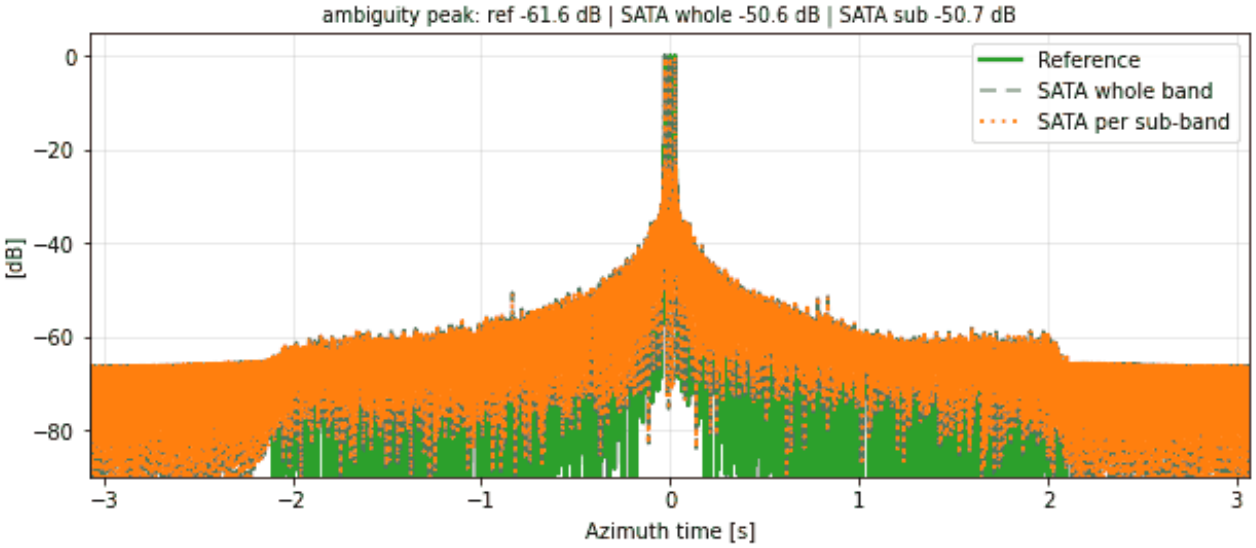


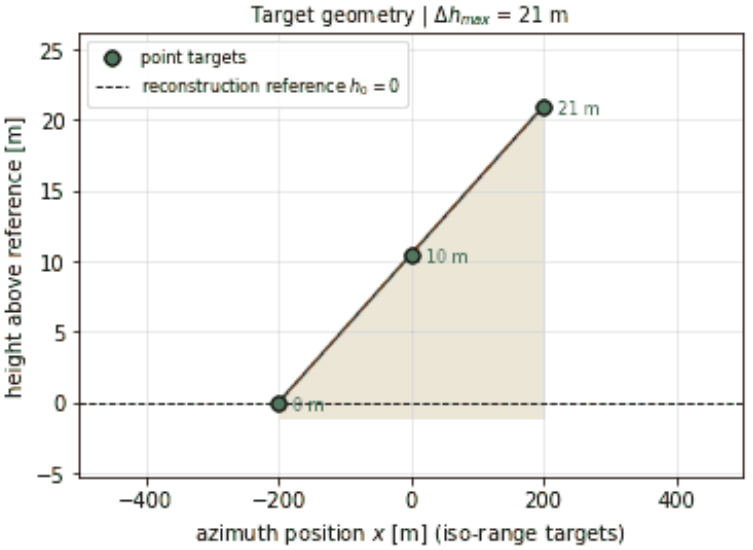



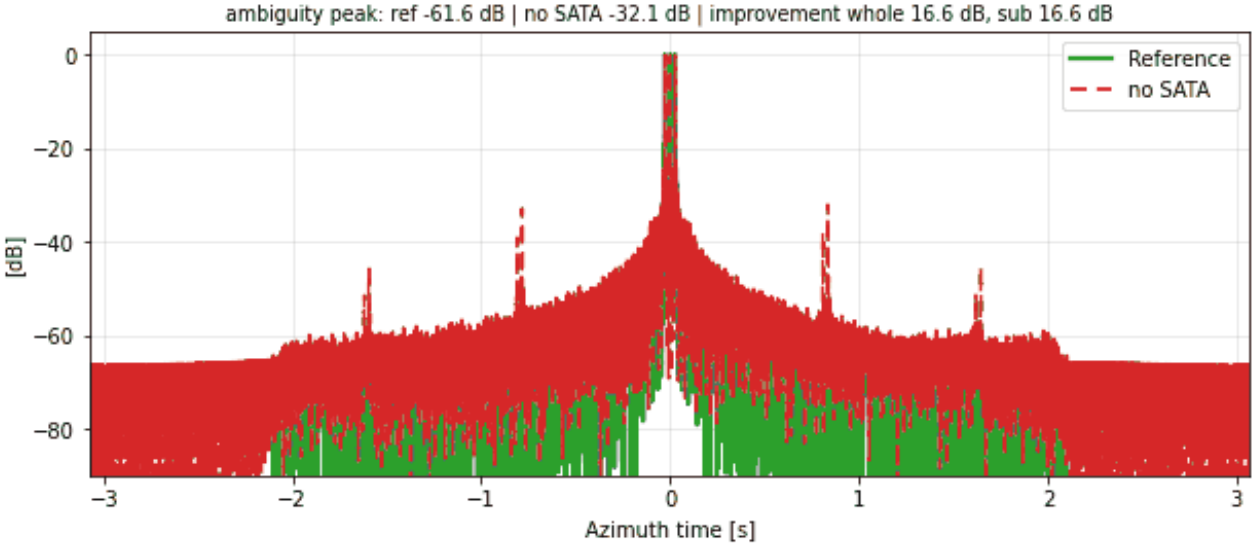



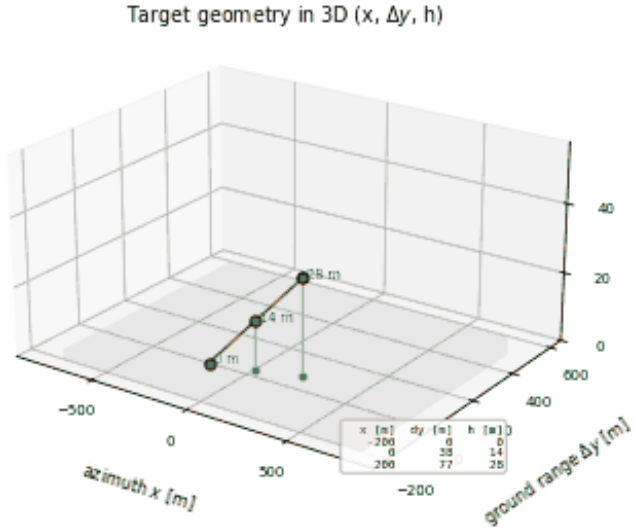



RA-SN-019 | SATA 1D | along-track ramp: N = 3, $\alpha = 4°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

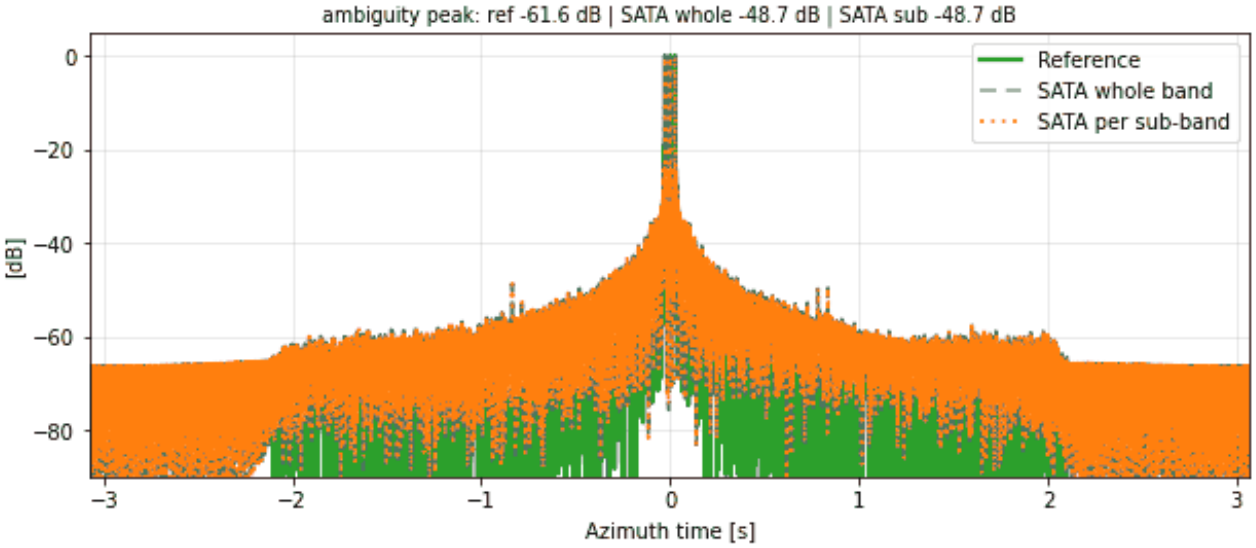


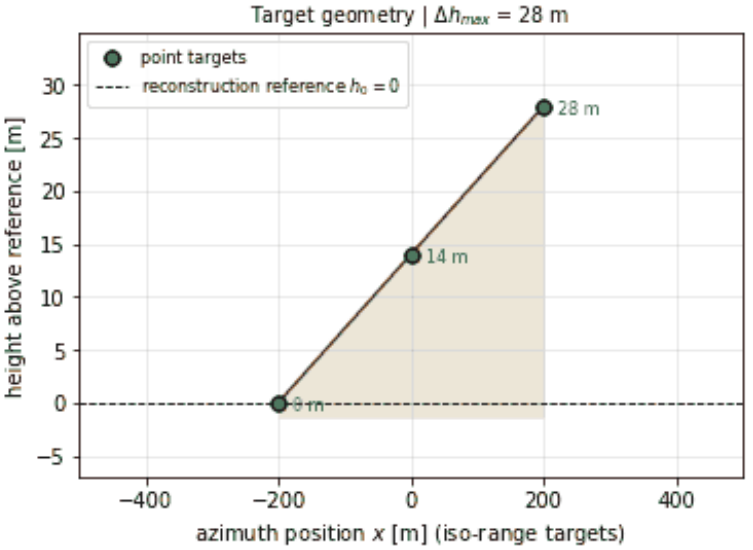



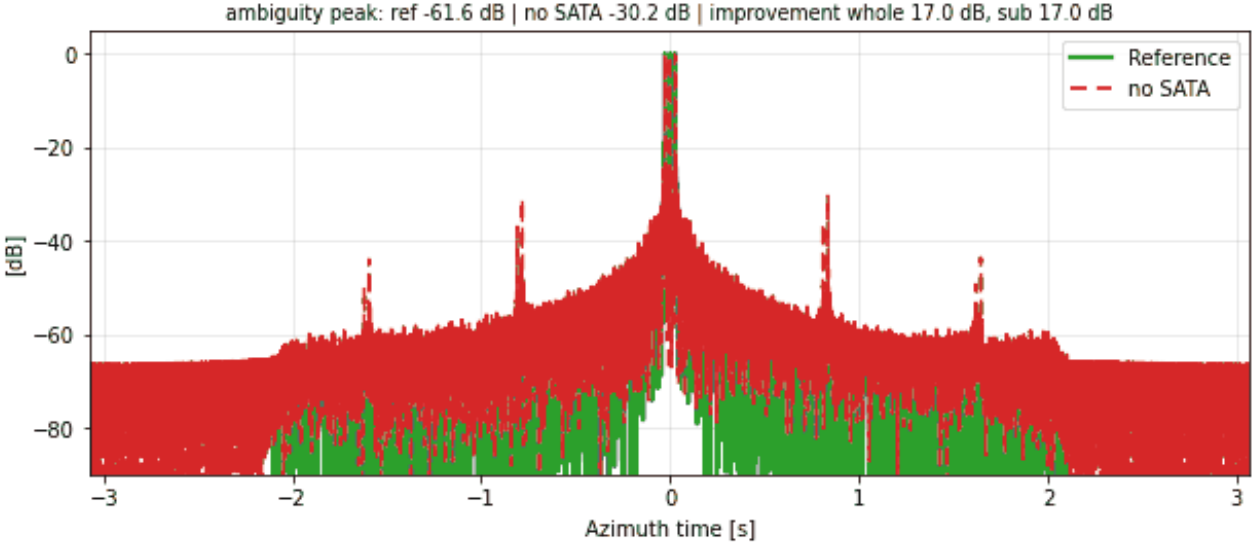



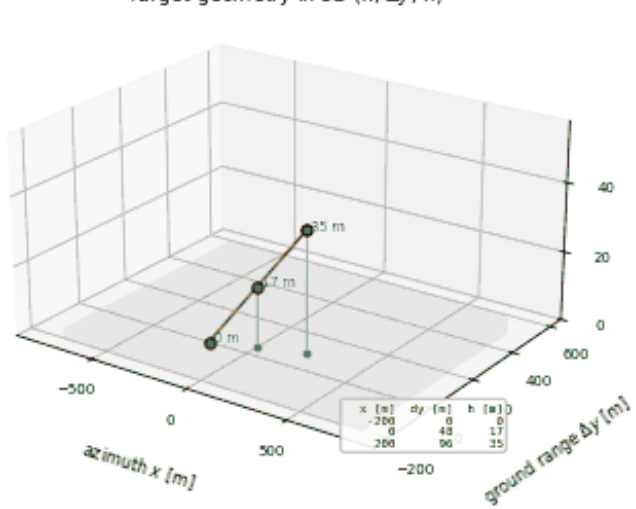



RA-SN-020 | SATA 1D | along-track ramp: N = 3, $\alpha = 5°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

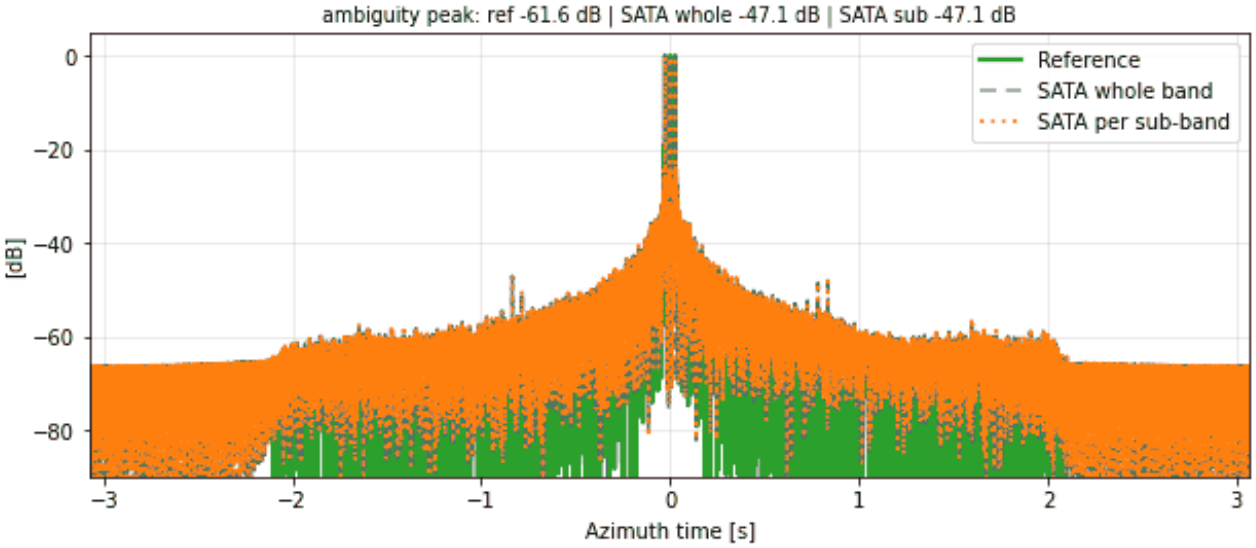


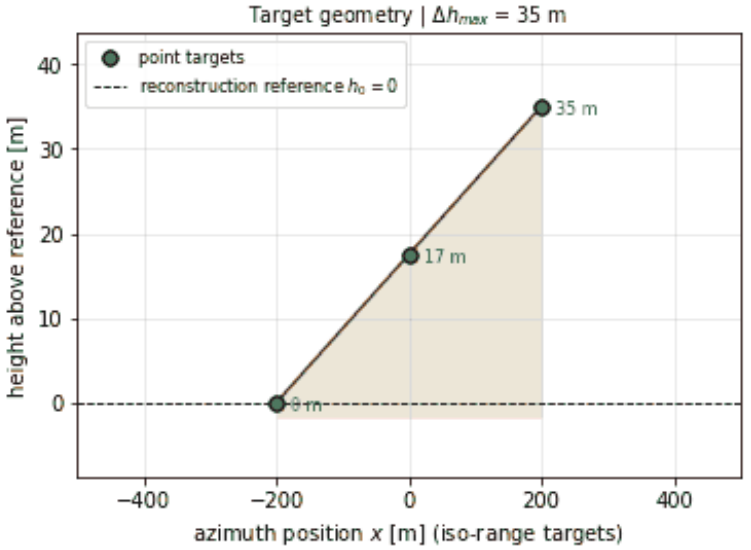



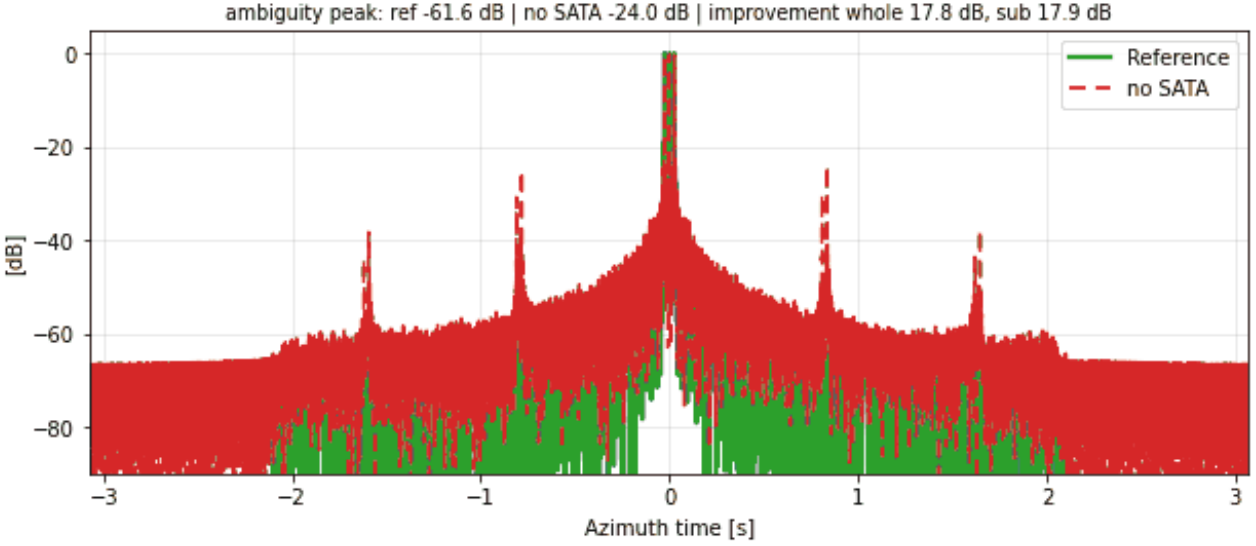



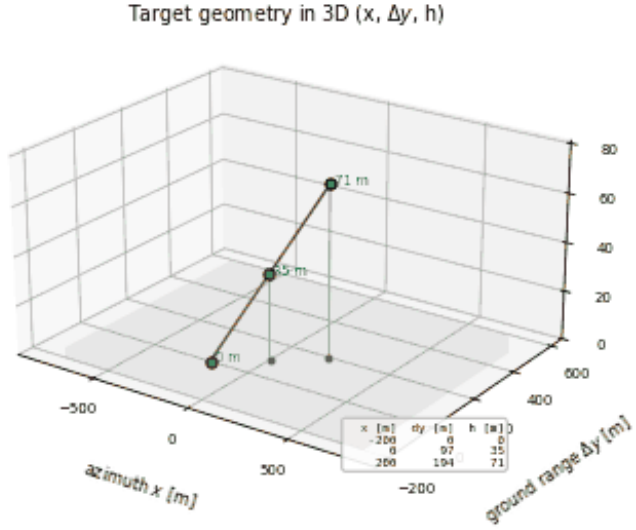



RA-SN-021 | SATA 1D | along-track ramp: N = 3, $\alpha = 10^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

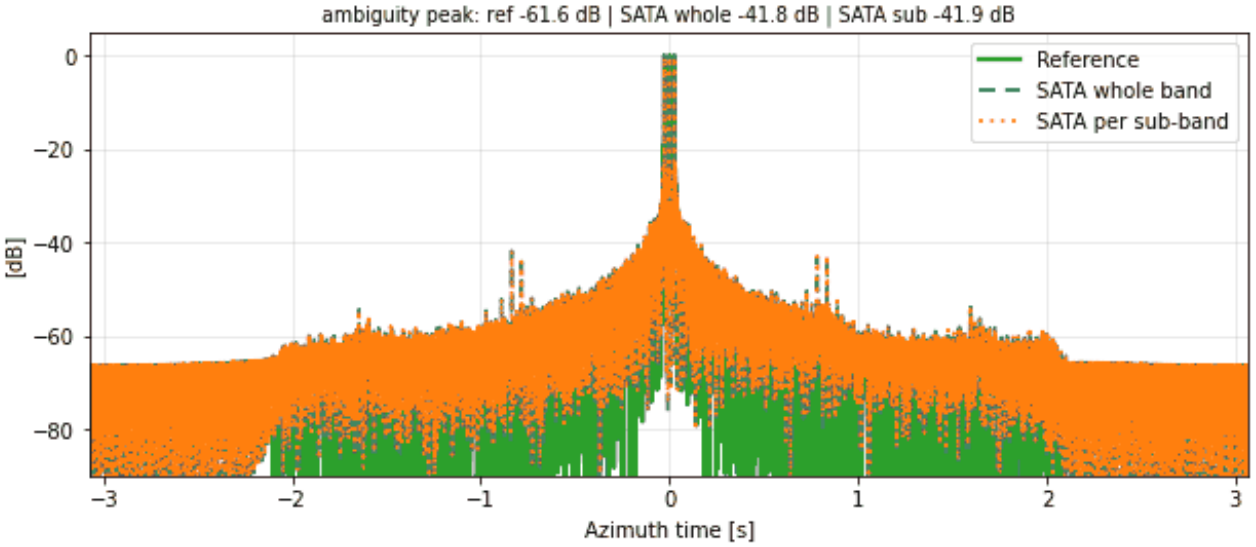

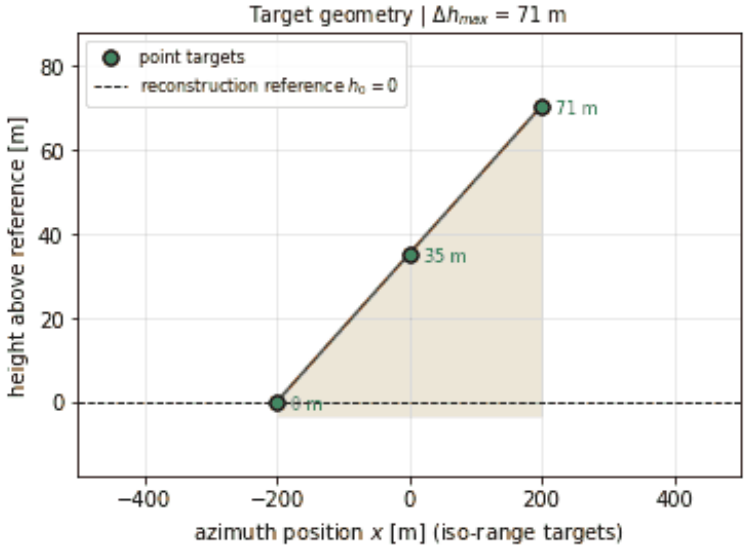



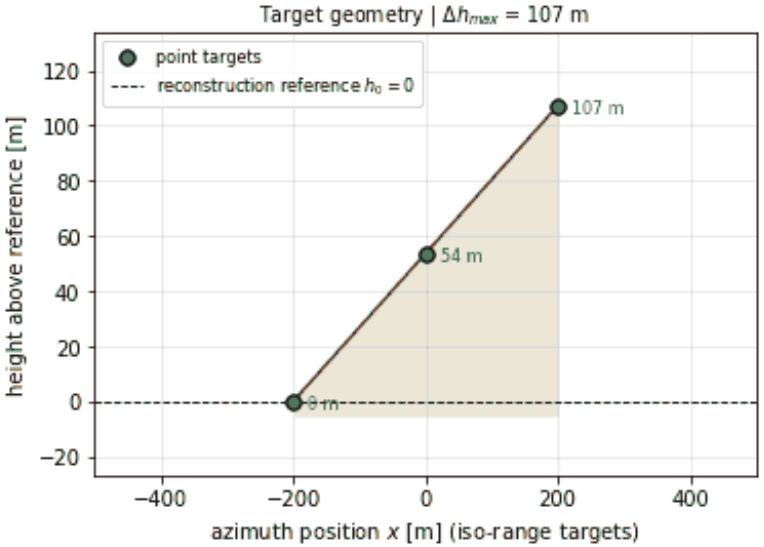



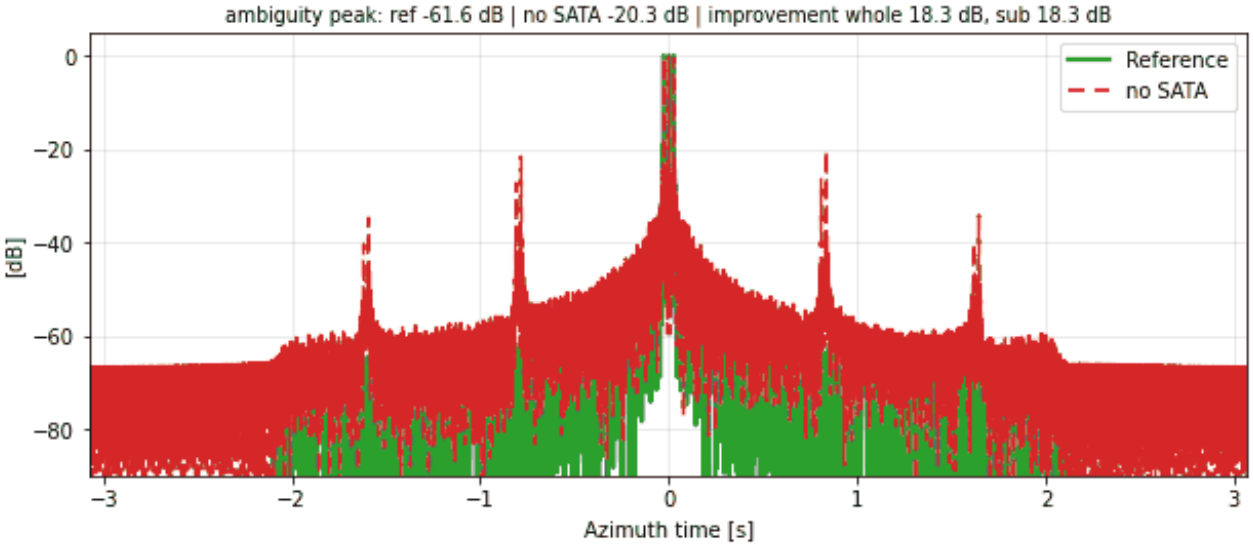



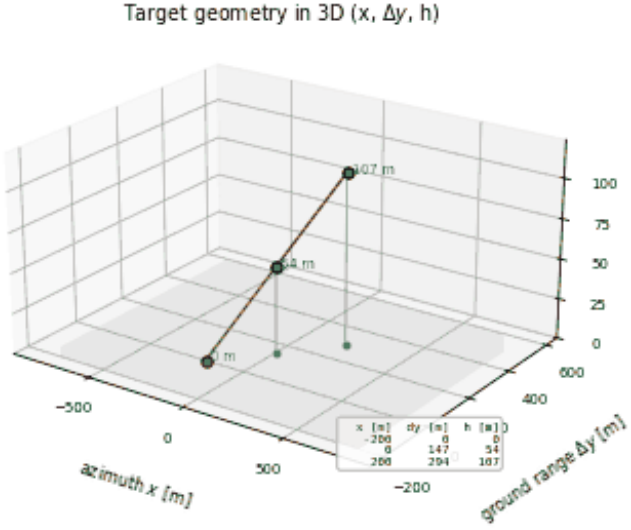
RA-SN-022 | SATA 1D | along-track ramp: N = 3, $\alpha = 15^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

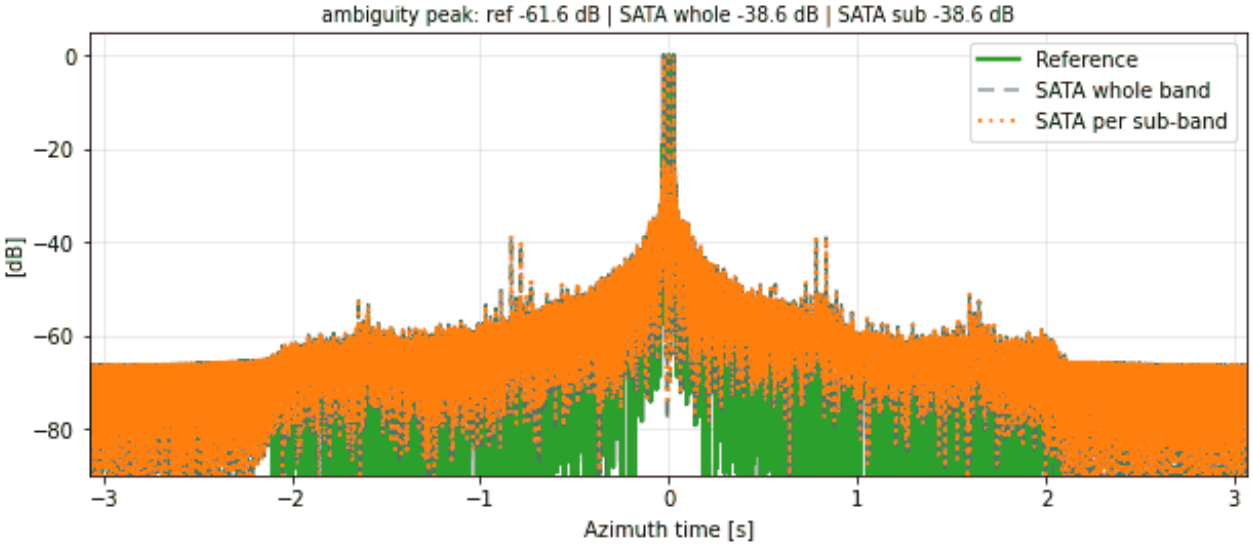






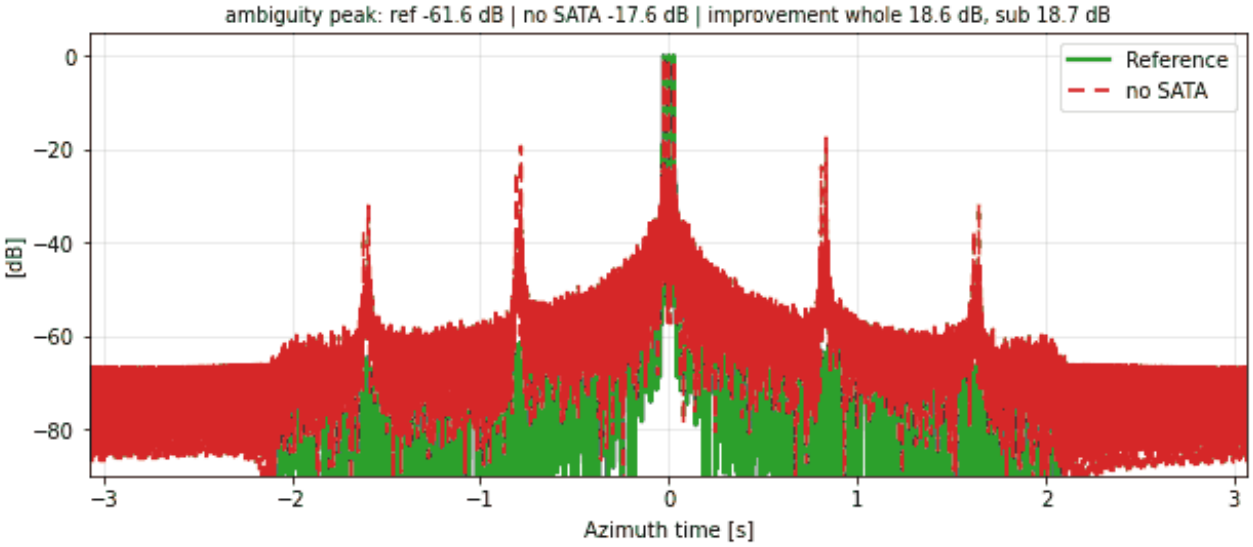



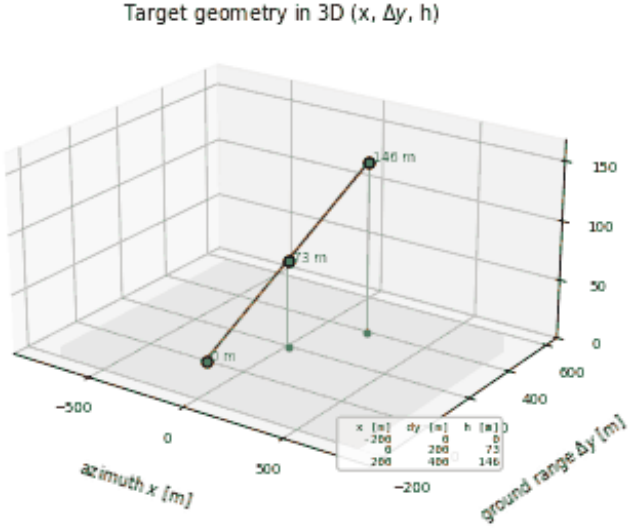



RA-SN-023 | SATA 1D | along-track ramp: N = 3, $\alpha = 20°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

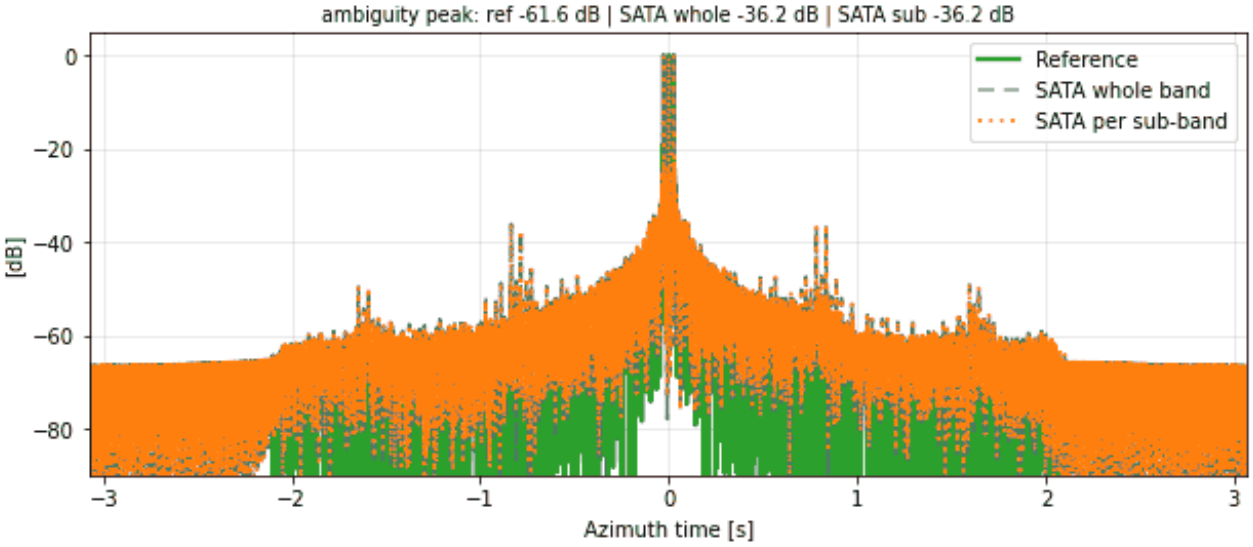


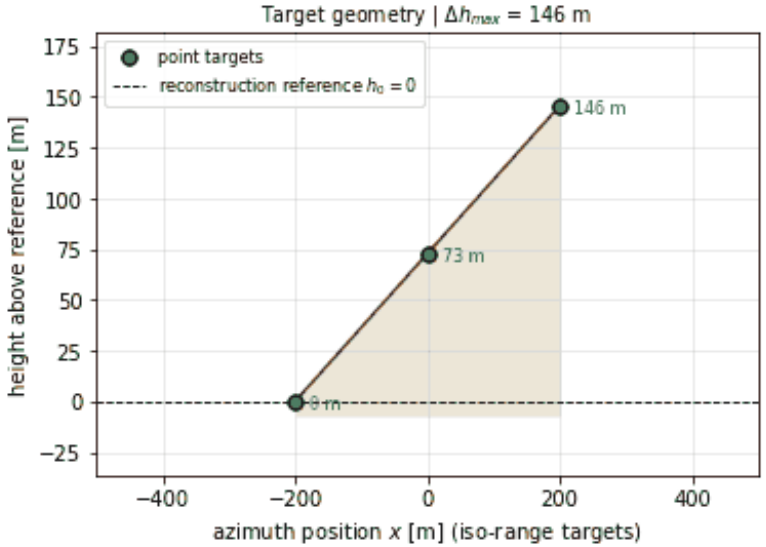



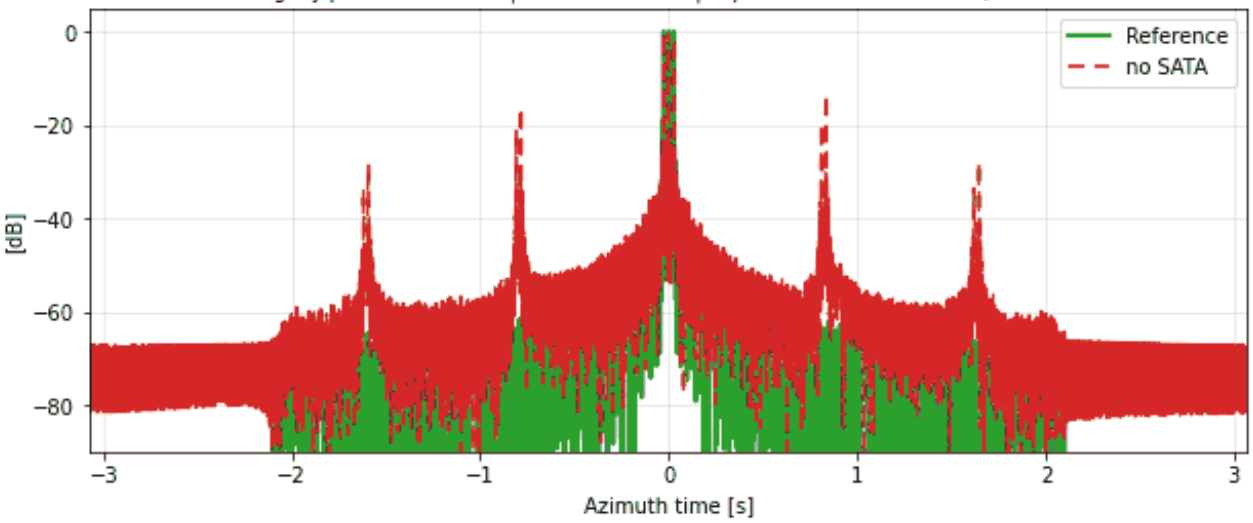



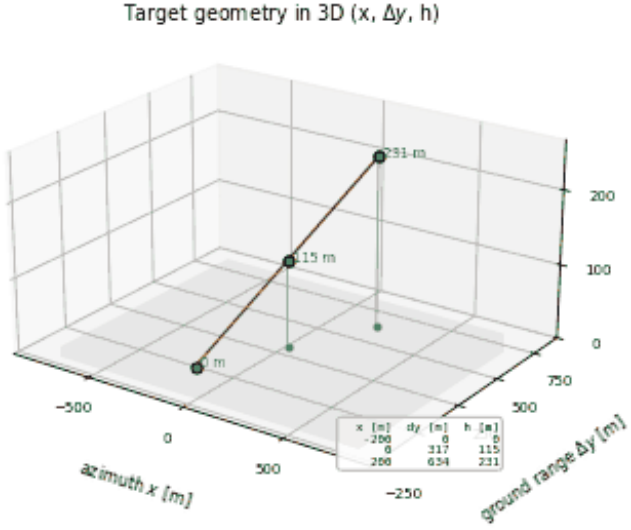



RA-SN-024 | SATA 1D | along-track ramp: N = 3, $\alpha = 30°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

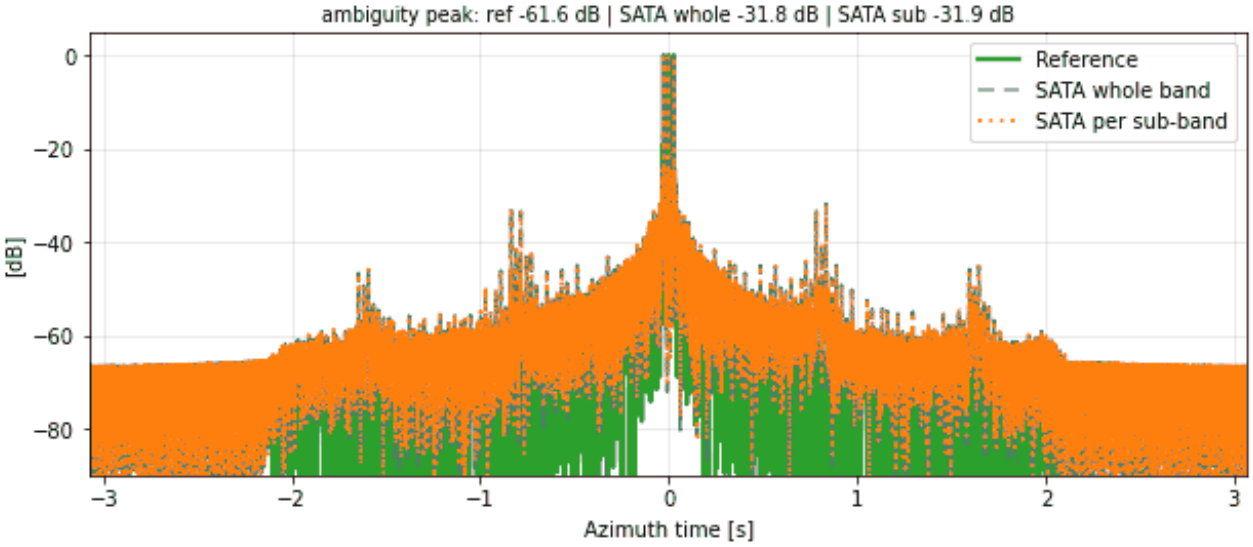

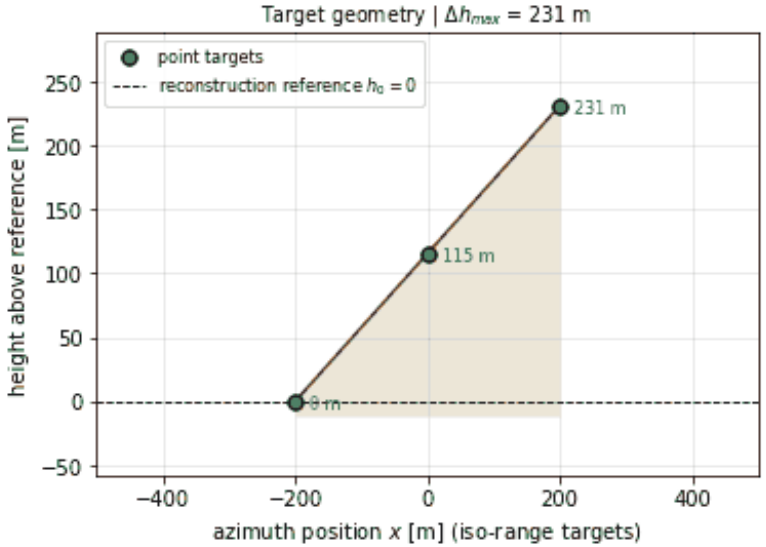



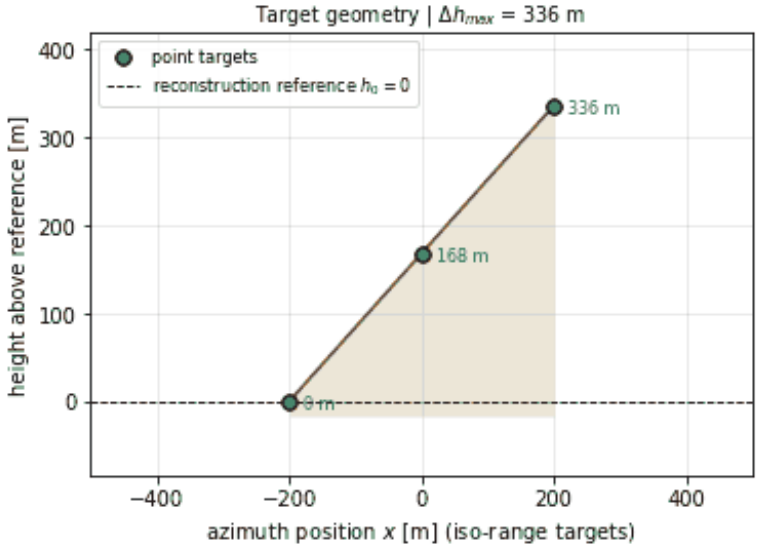



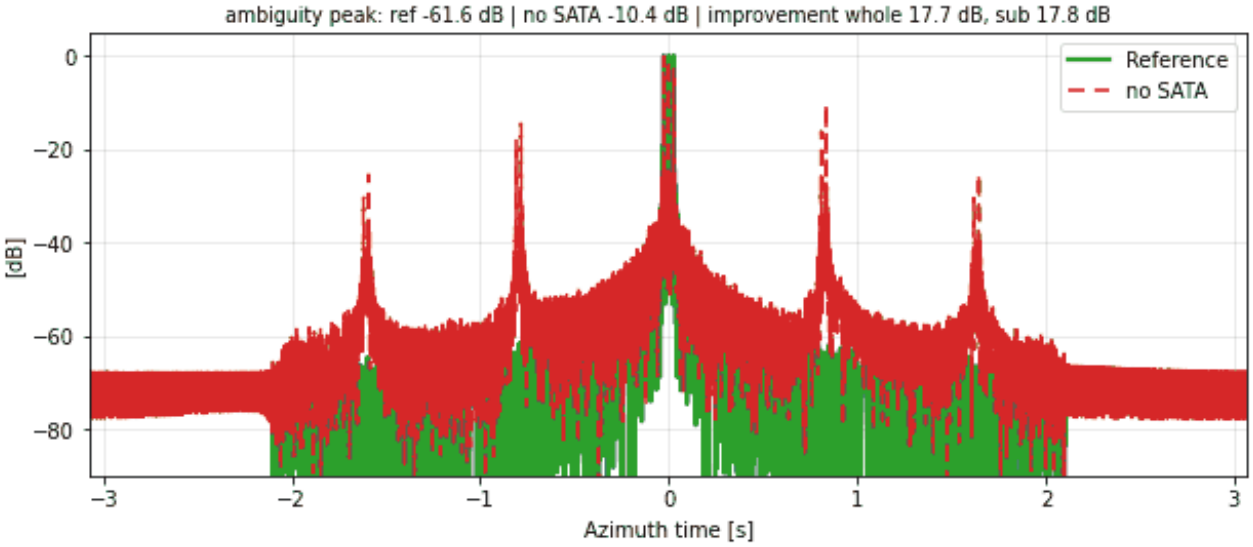



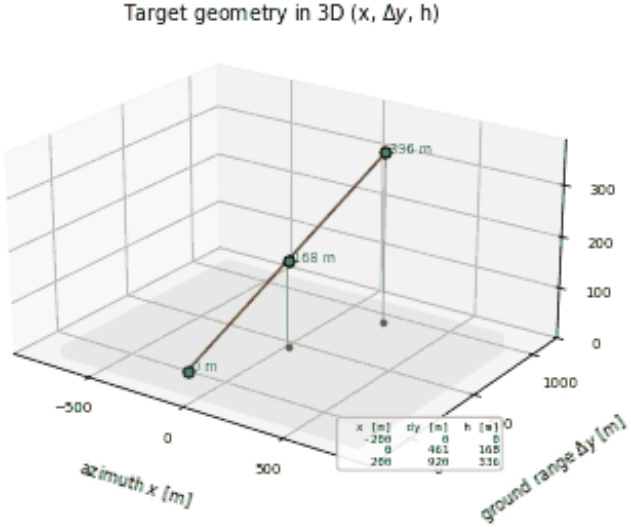
RA-SN-025 | SATA 1D | along-track ramp: N = 3, $\alpha = 40°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

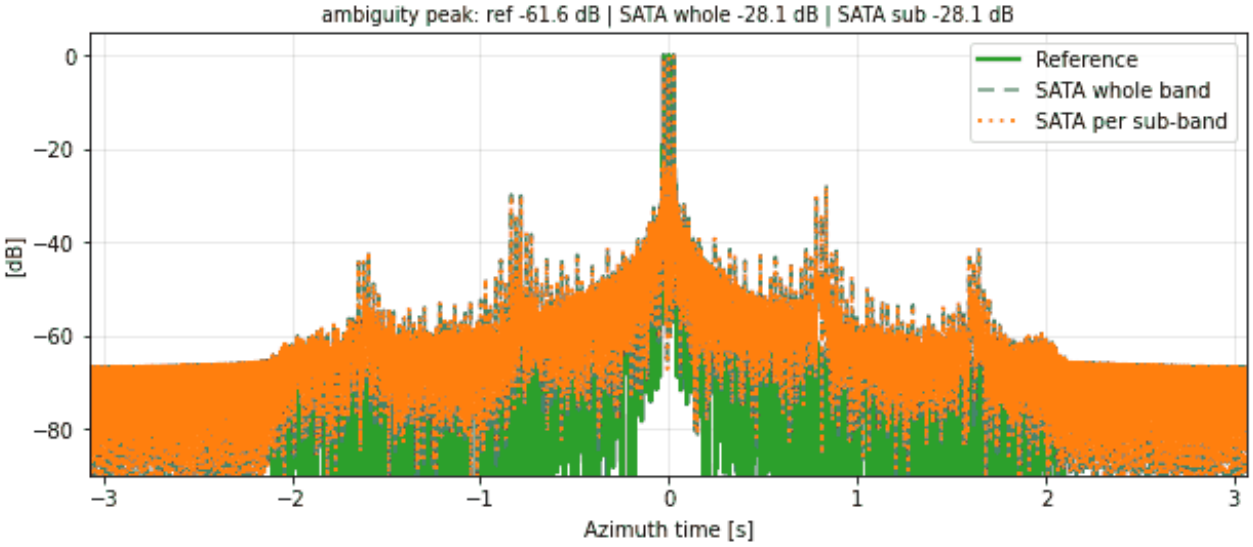






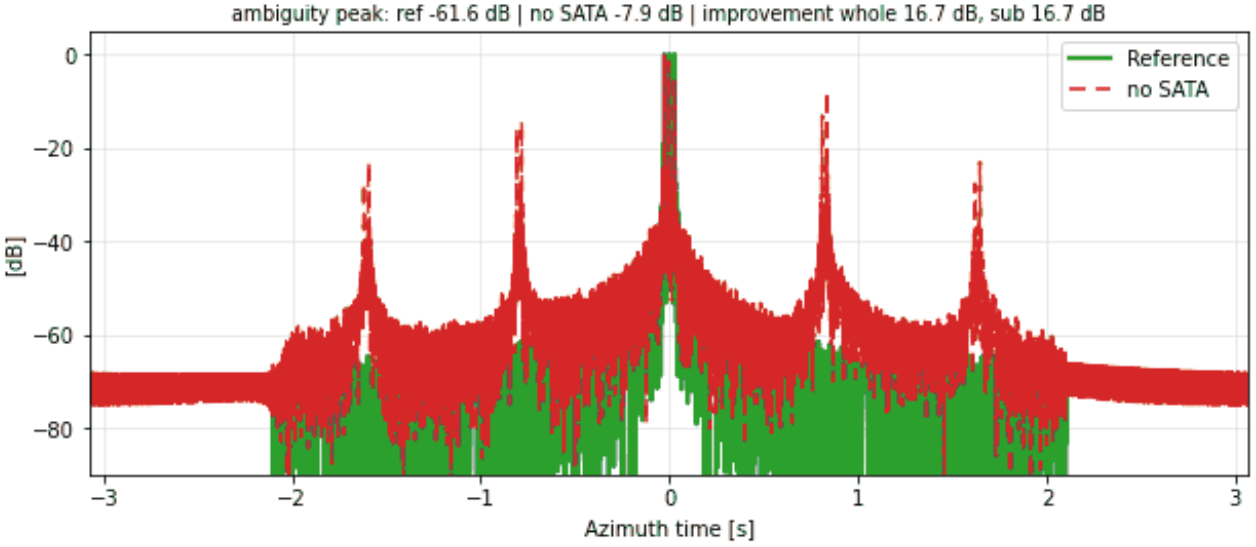



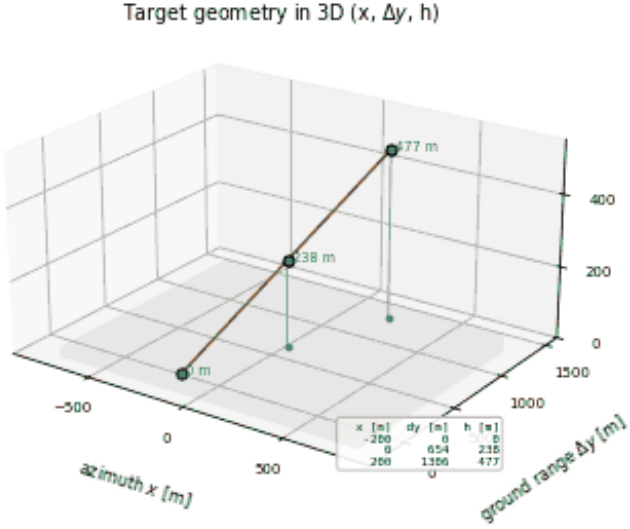



RA-SN-026 | SATA 1D | along-track ramp: N = 3, $\alpha = 50°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

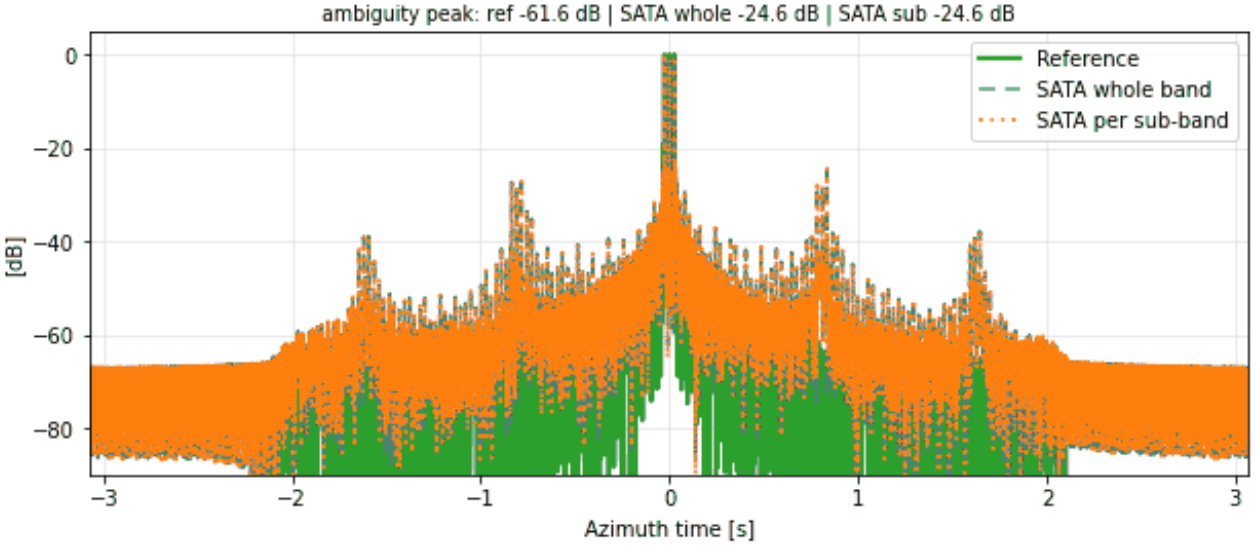


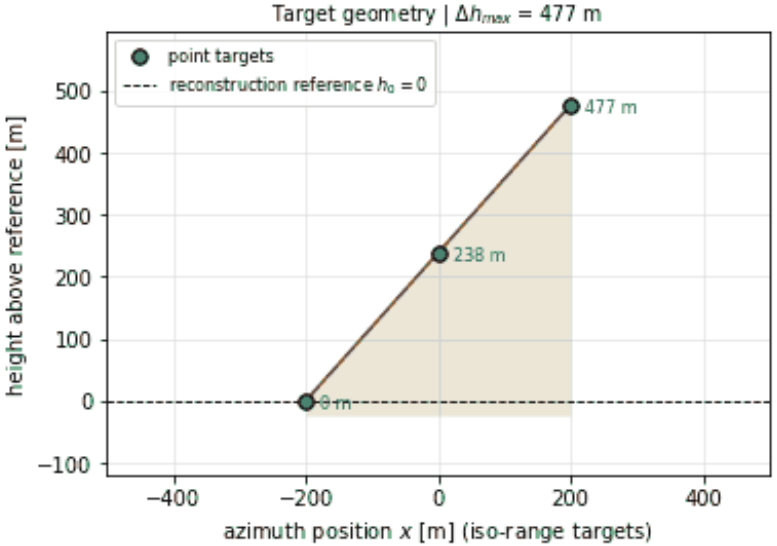



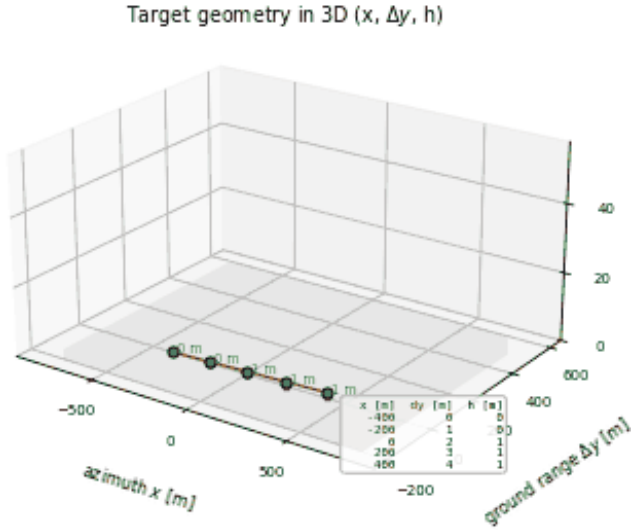
RA-SN-027 | SATA 1D | along-track ramp: N = 5, $\alpha = 0.1^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



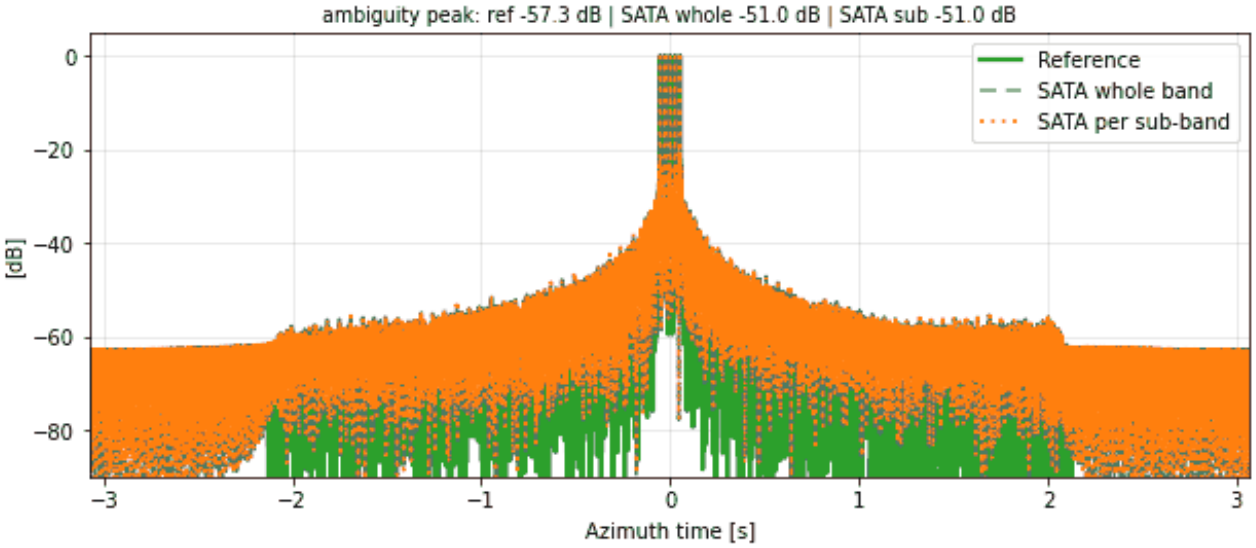



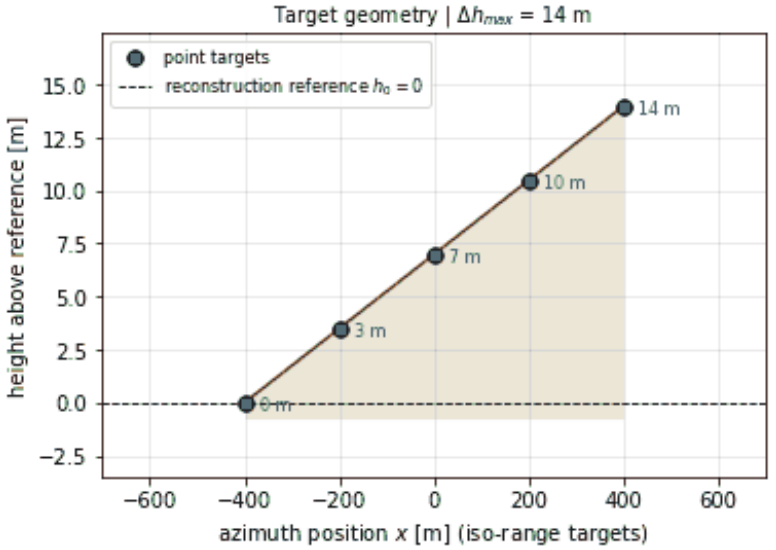


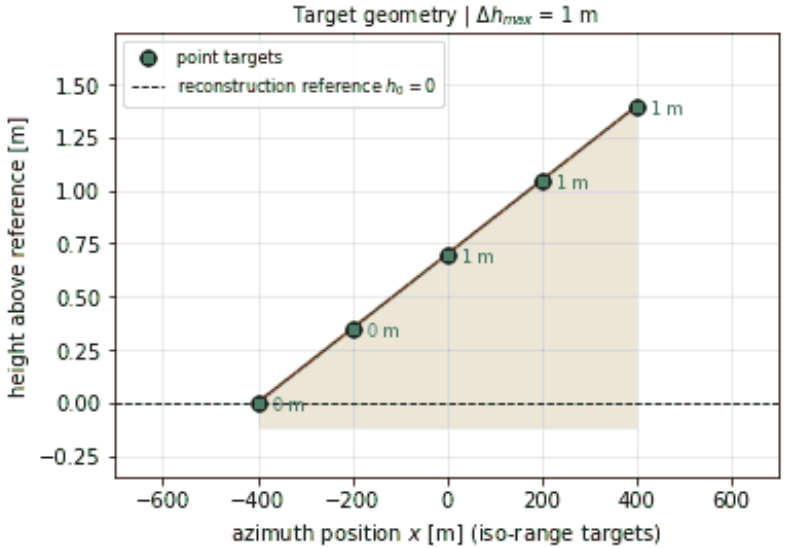





RA-SN-028 | SATA 1D | along-track ramp: N = 5, $\alpha = 1^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

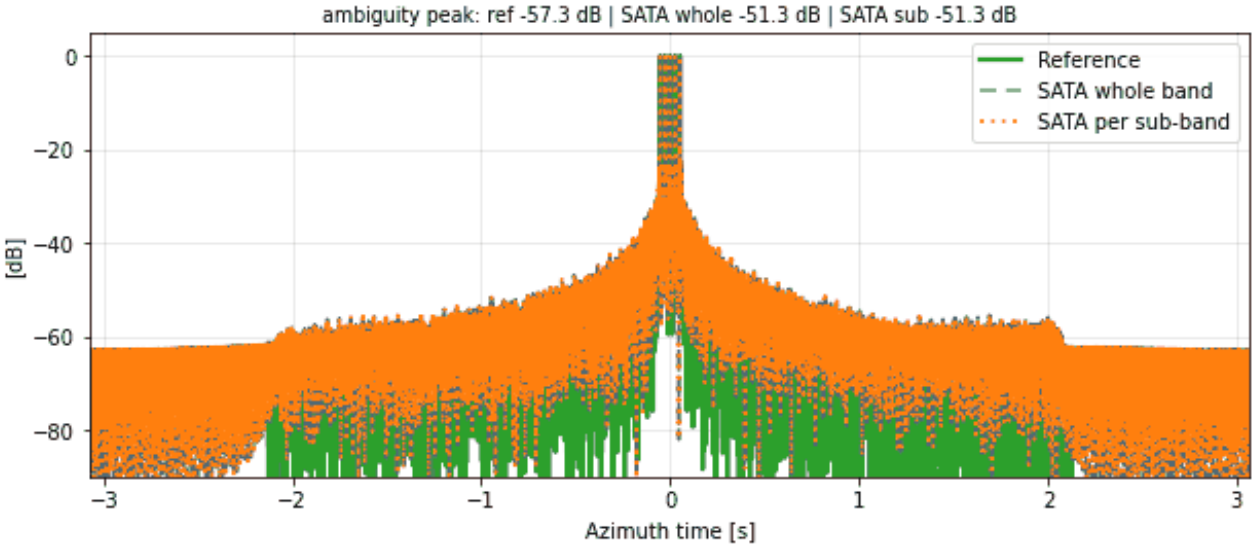


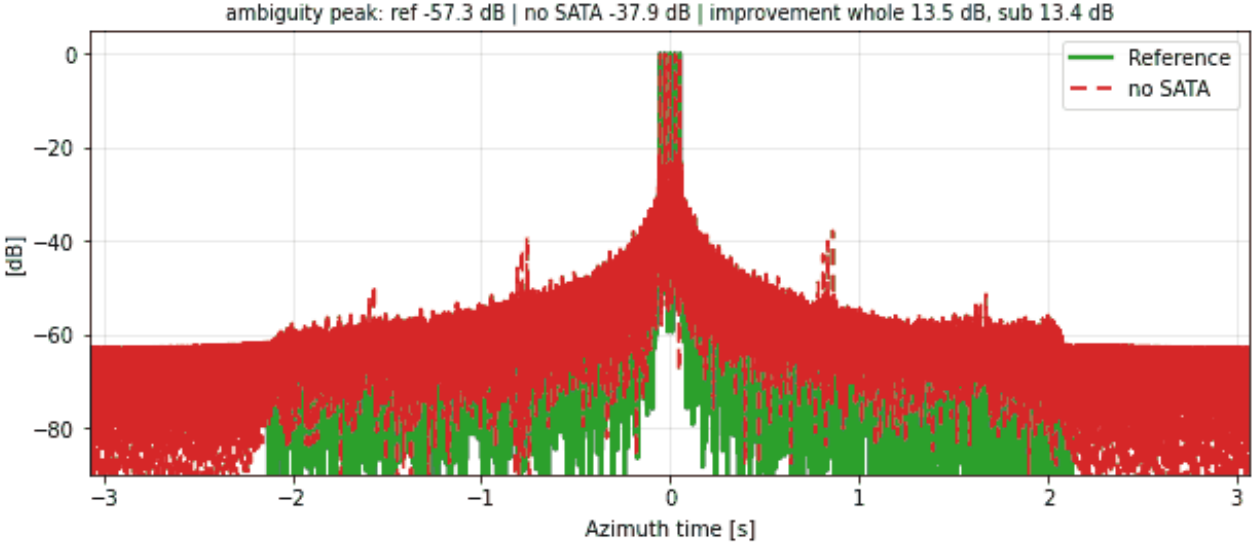



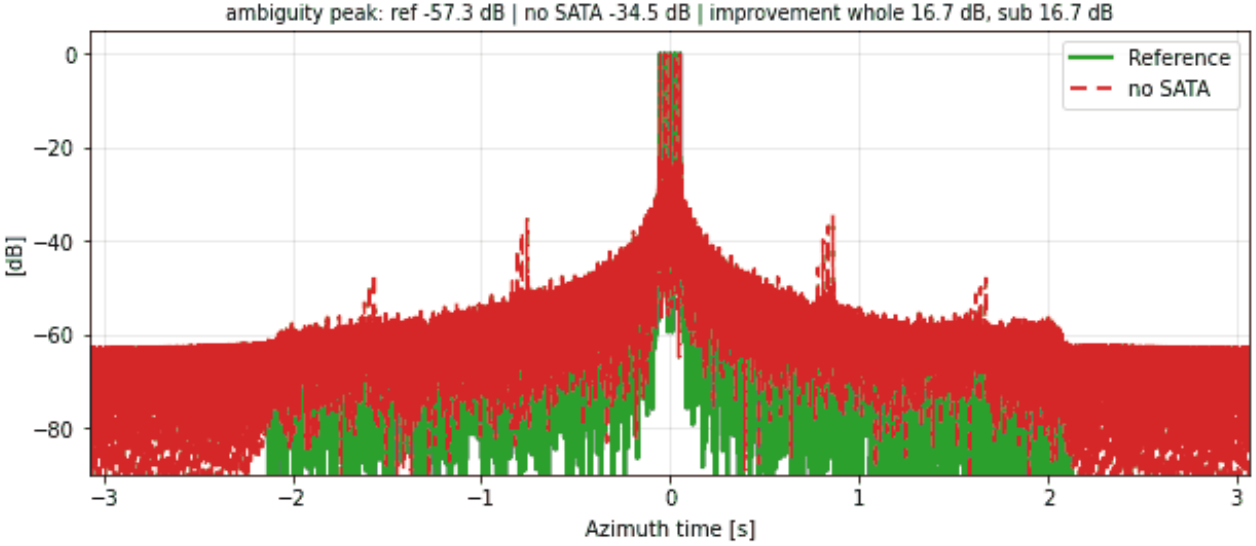


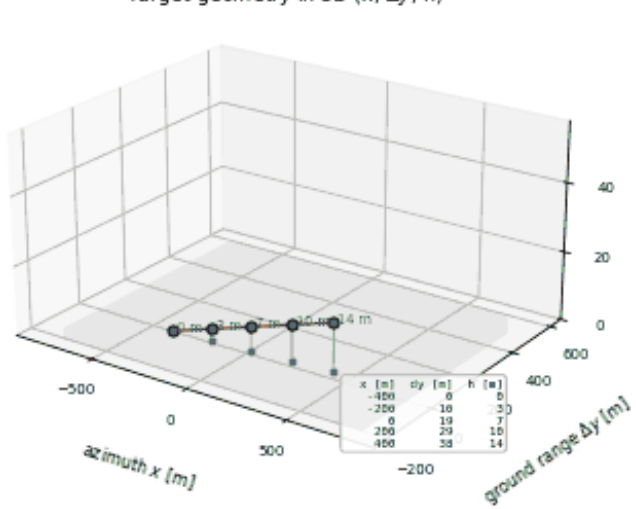
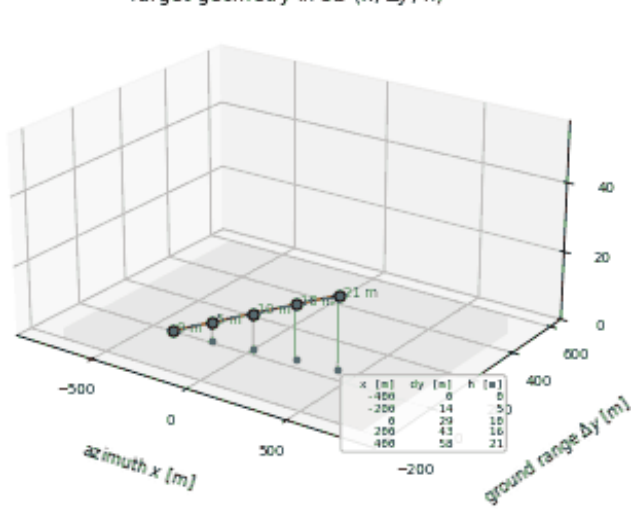



RA-SN-029 | SATA 1D | along-track ramp: N = 5, $\alpha$ = 1.5° (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

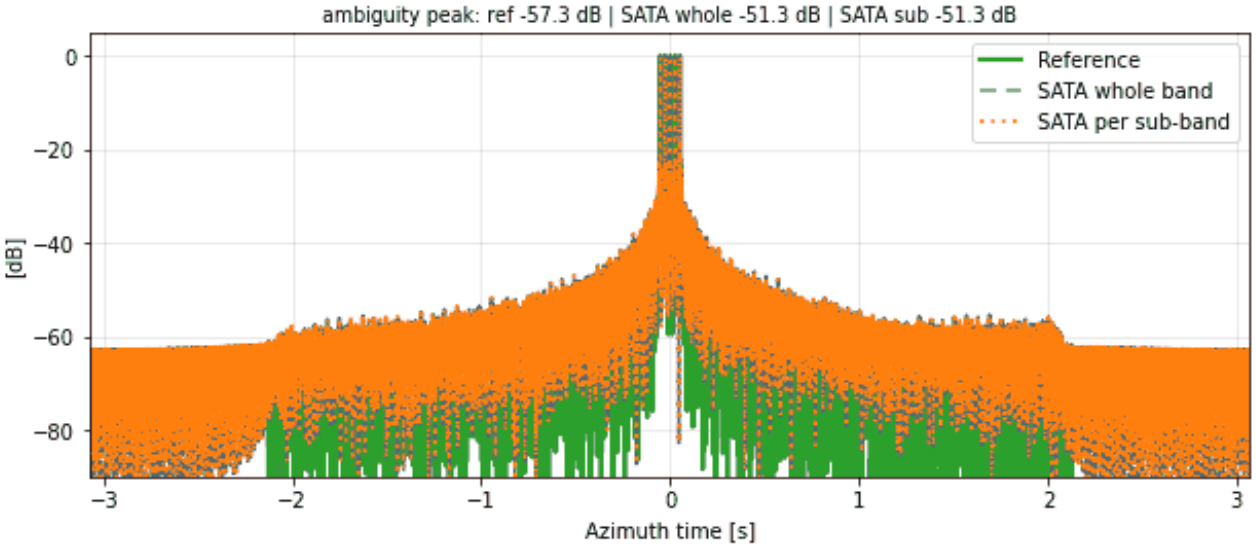


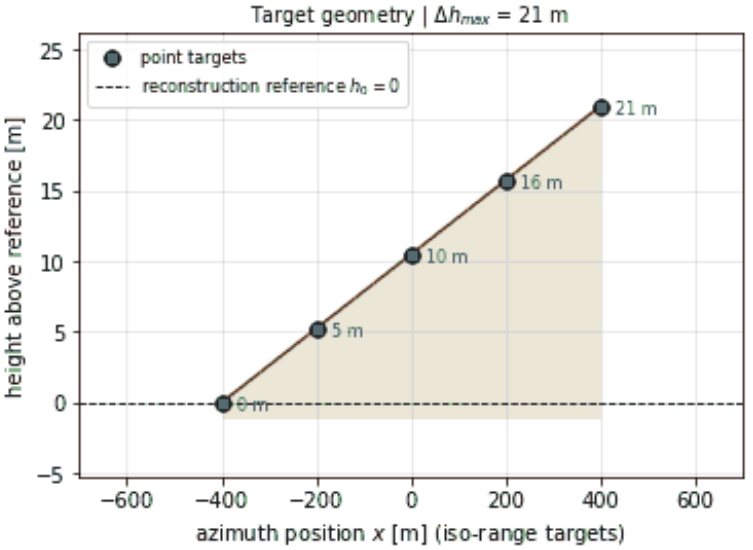



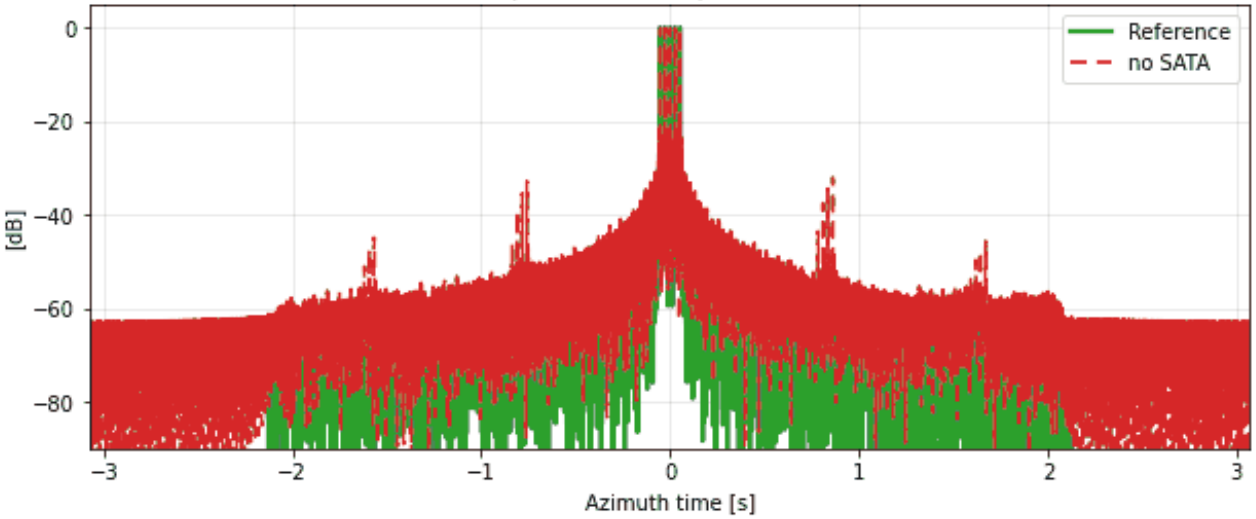



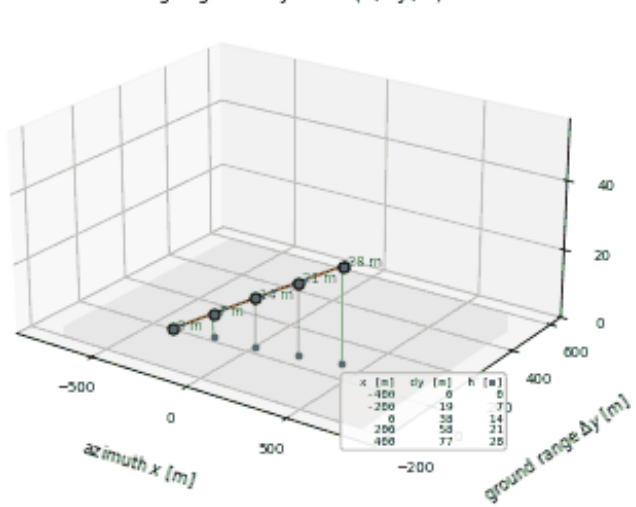



RA-SN-030 | SATA 1D | along-track ramp: N = 5, $\alpha = 2^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

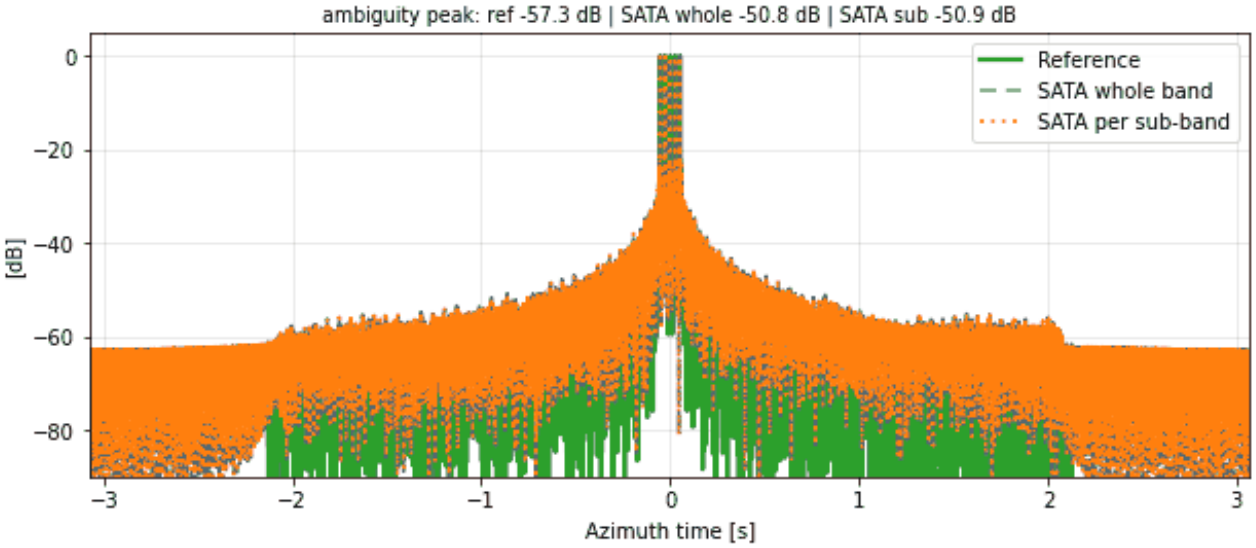


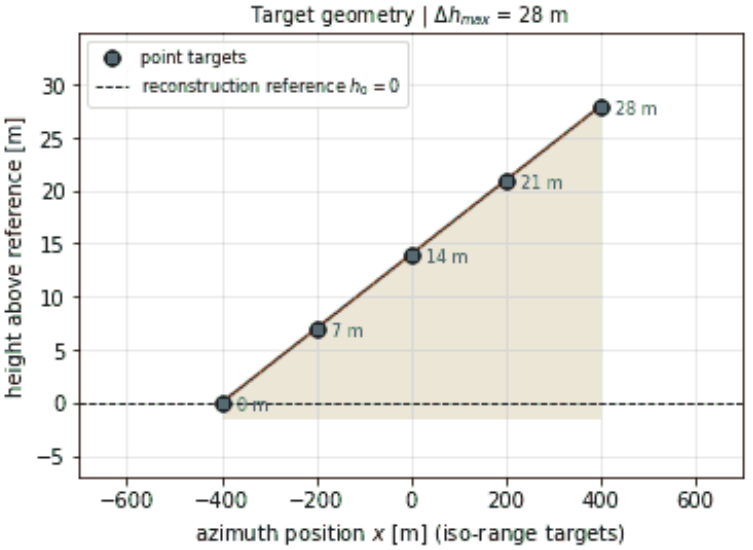



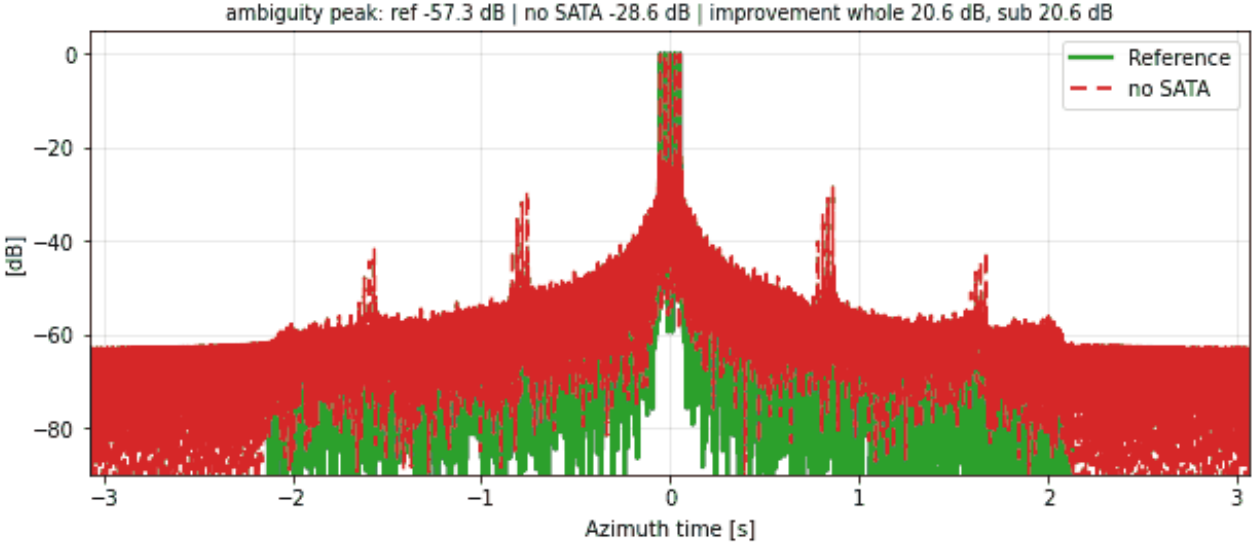



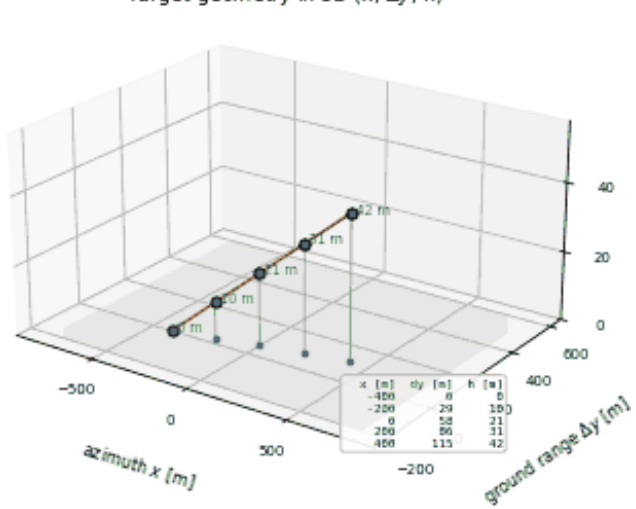



RA-SN-031 | SATA 1D | along-track ramp: N = 5, $\alpha = 3°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

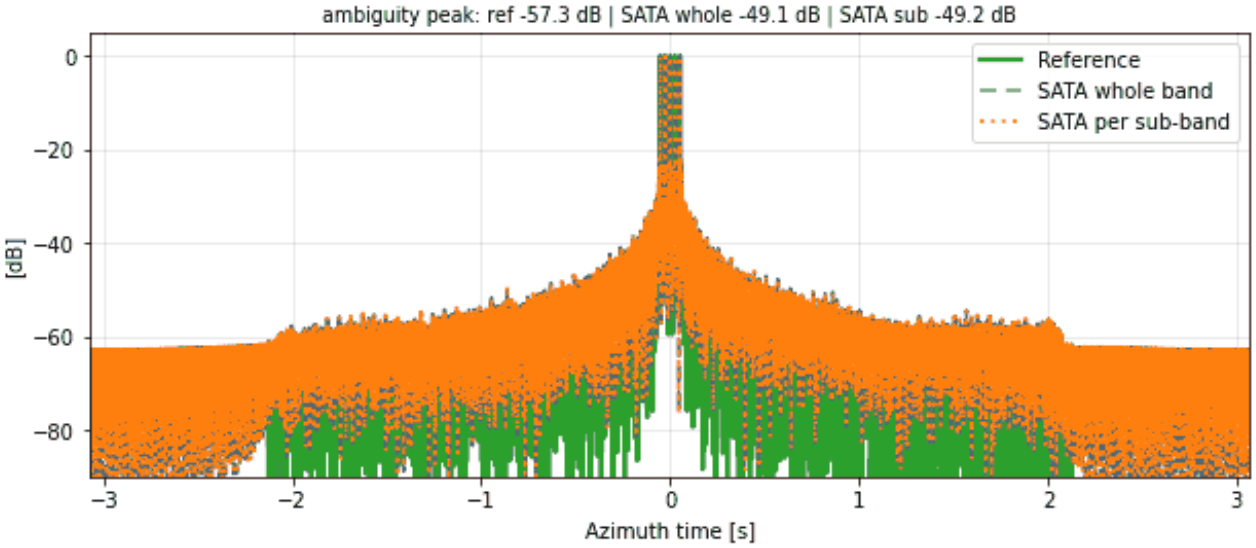

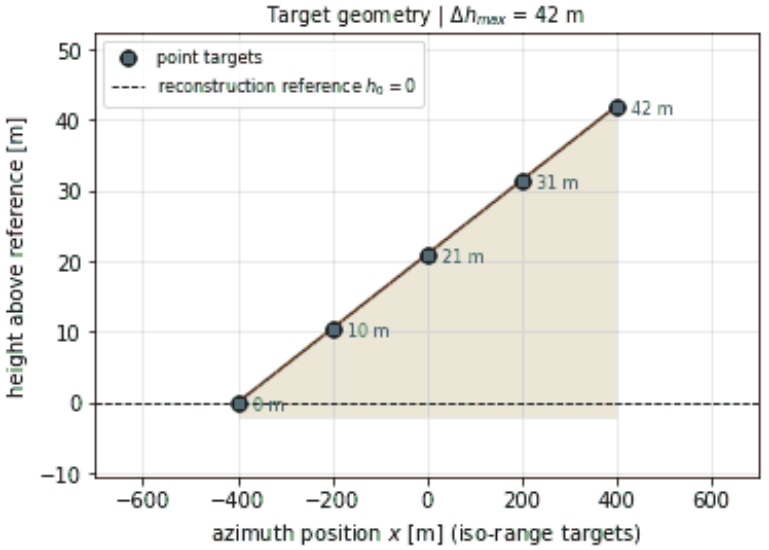



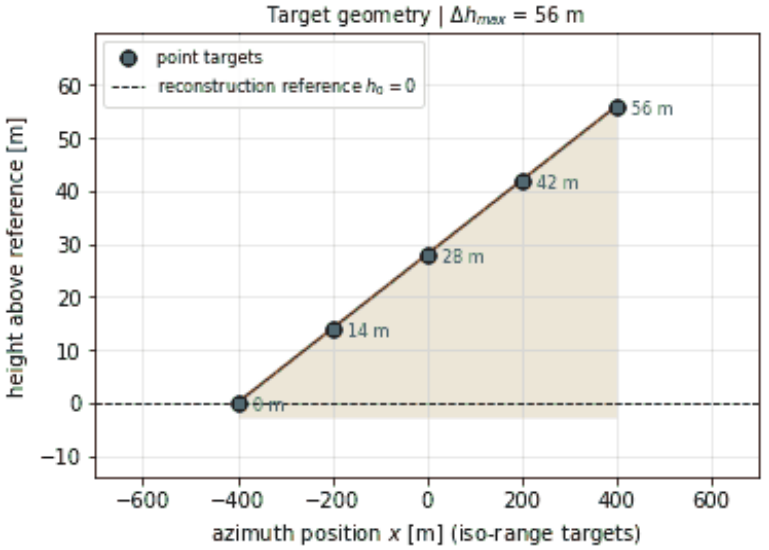



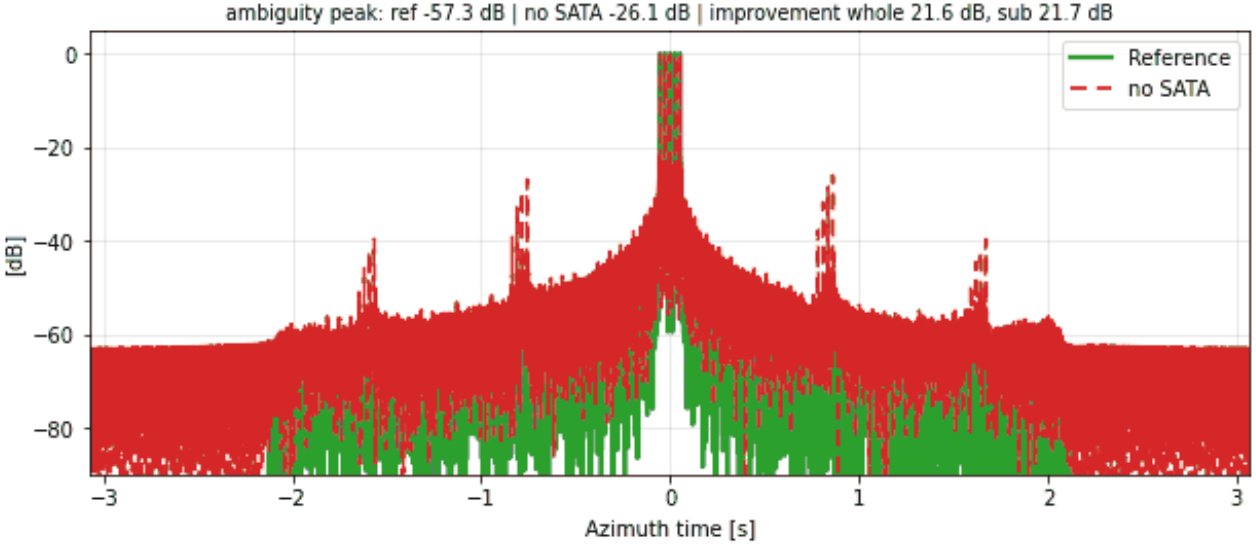



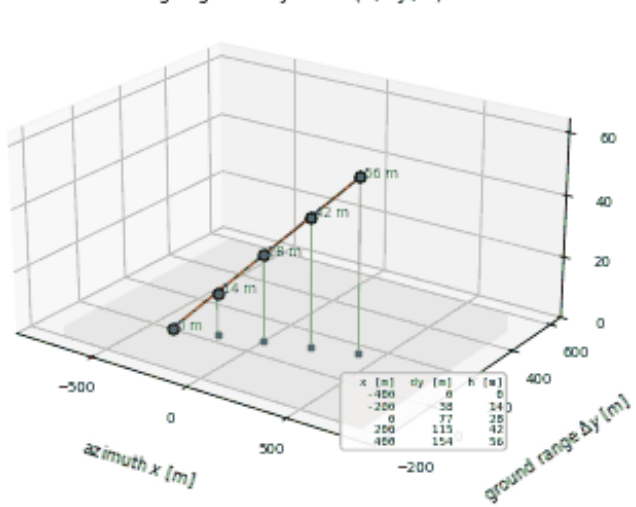
RA-SN-032 | SATA 1D | along-track ramp: N = 5, $\alpha = 4°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

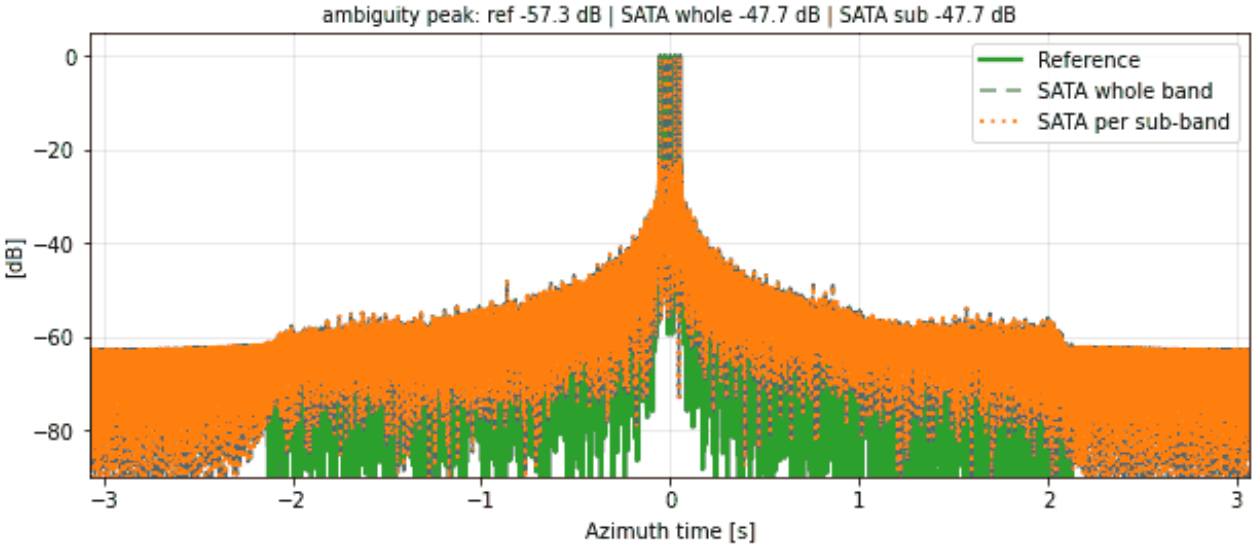





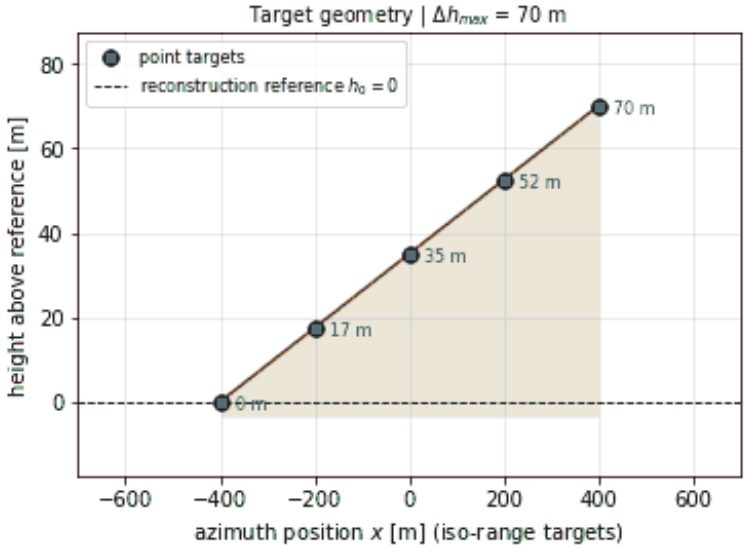



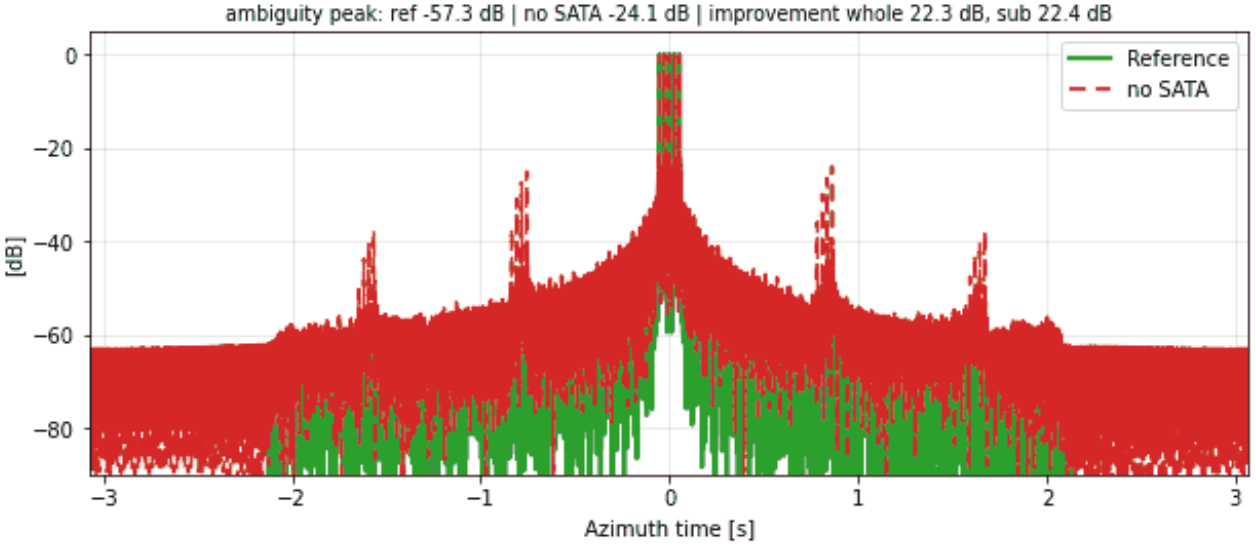



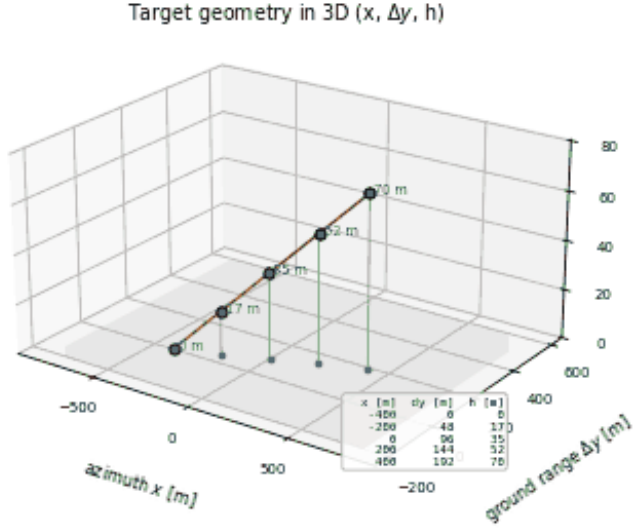
RA-SN-033 | SATA 1D | along-track ramp: N = 5, $\alpha = 5^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

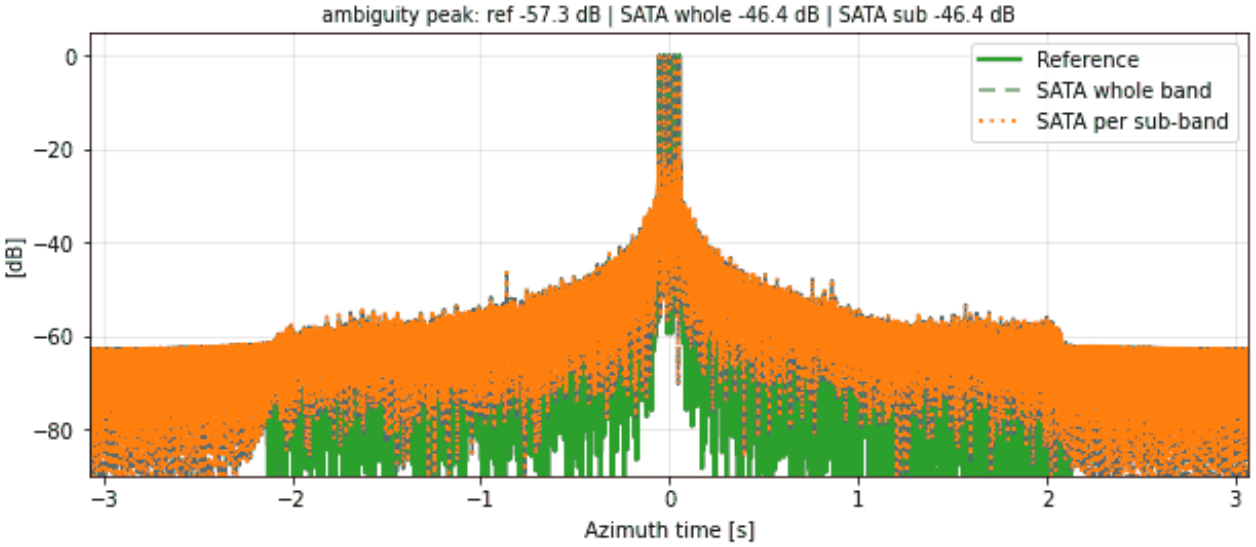






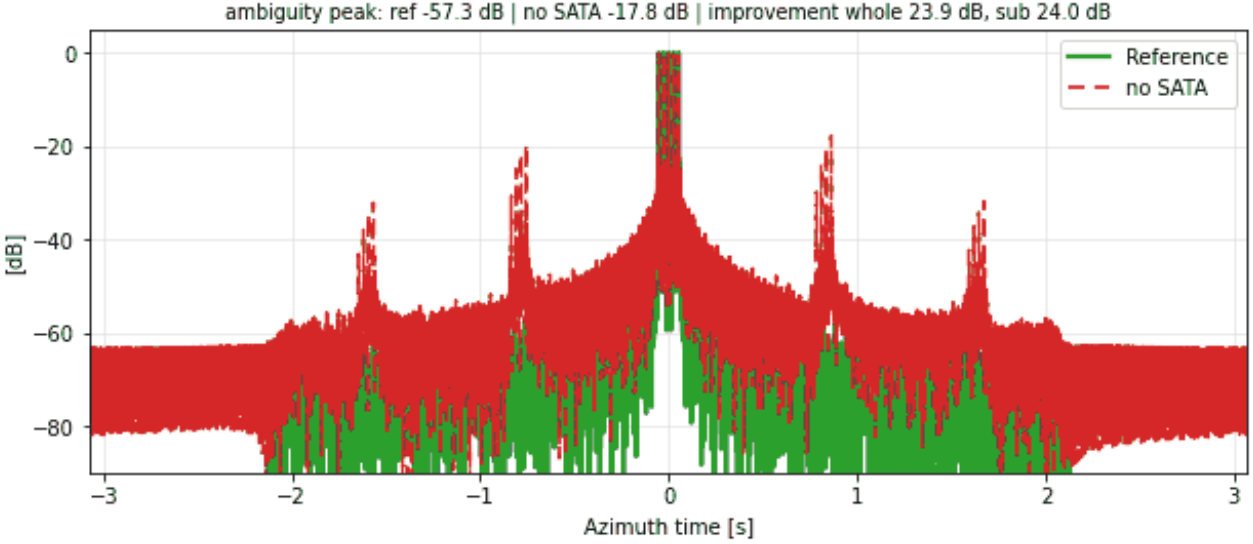



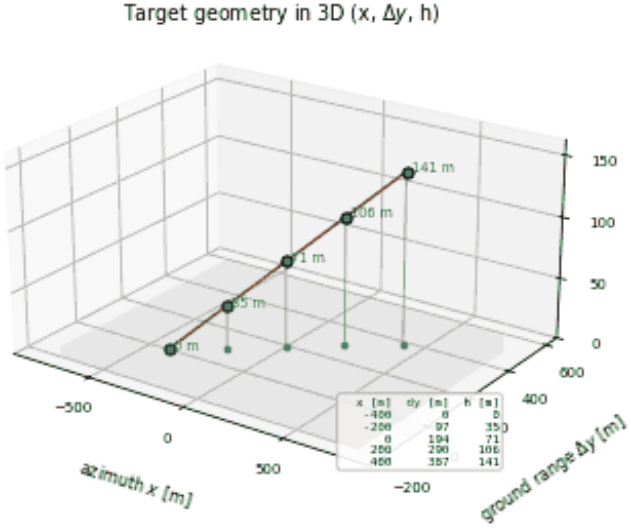



RA-SN-034 | SATA 1D | along-track ramp: N = 5, $\alpha = 10°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

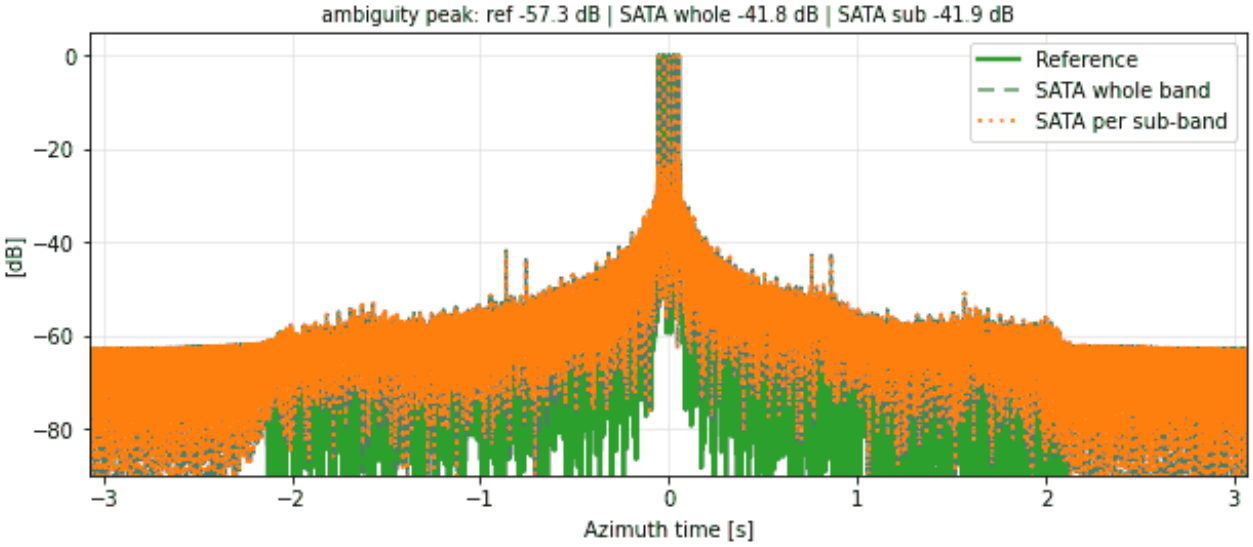

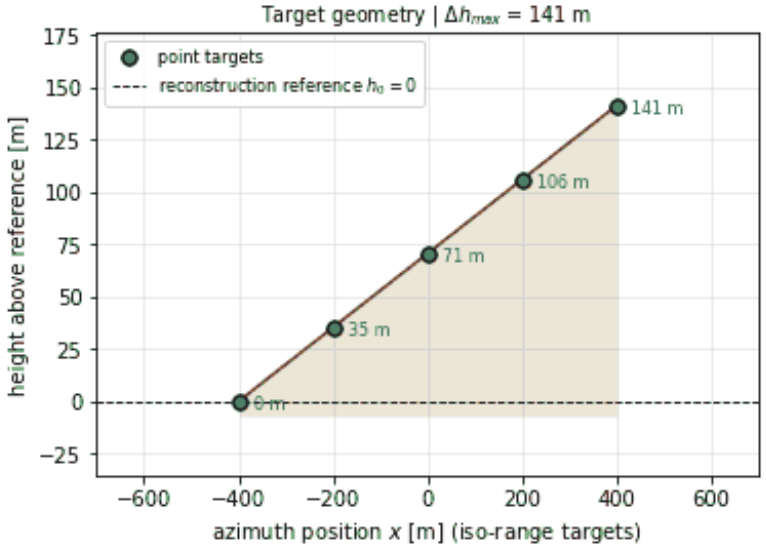



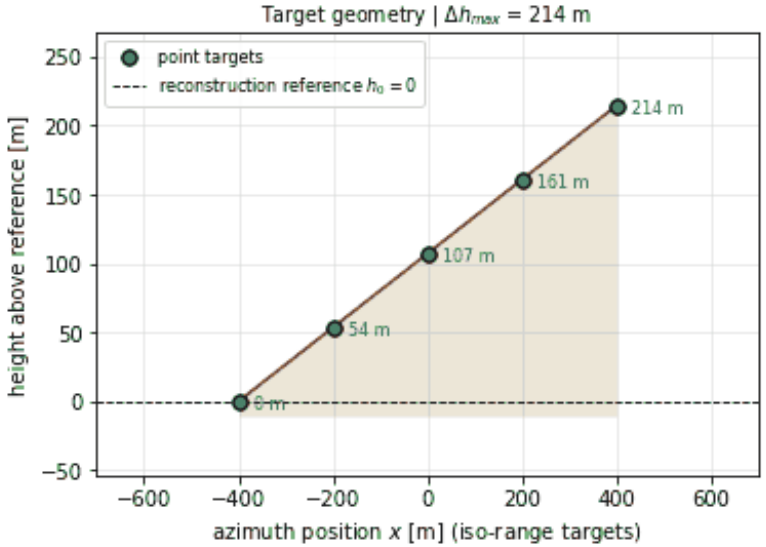



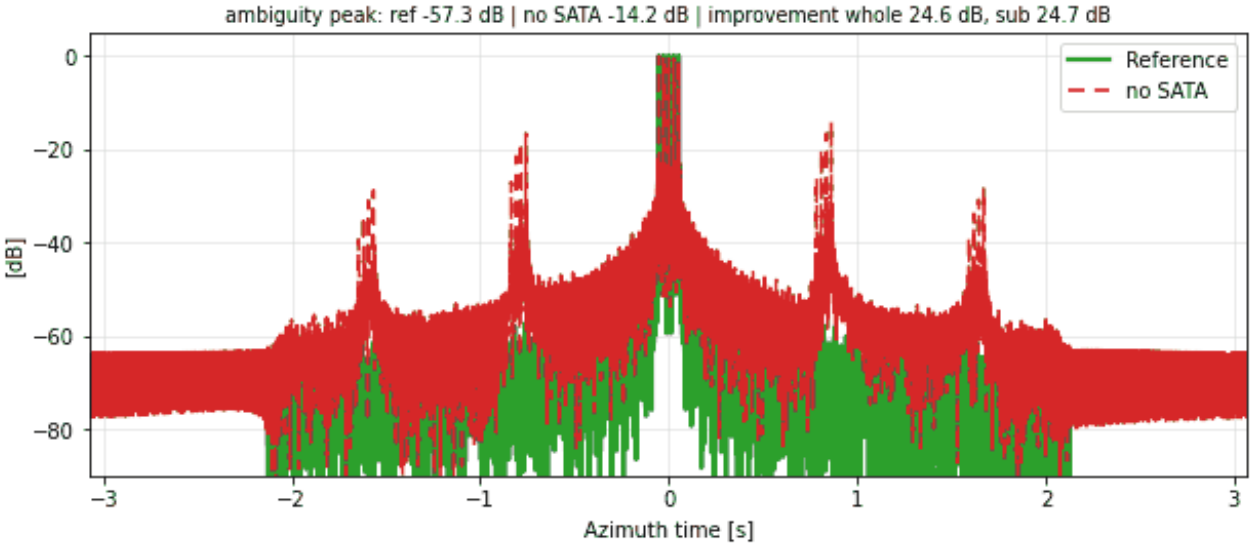



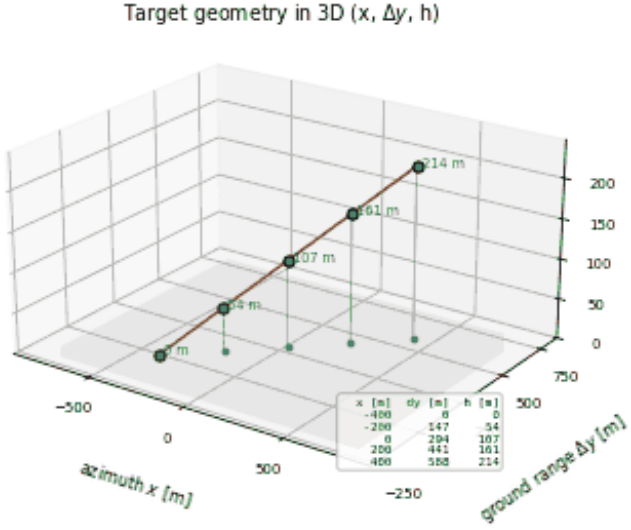
RA-SN-035 | SATA 1D | along-track ramp: N = 5, $\alpha = 15^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

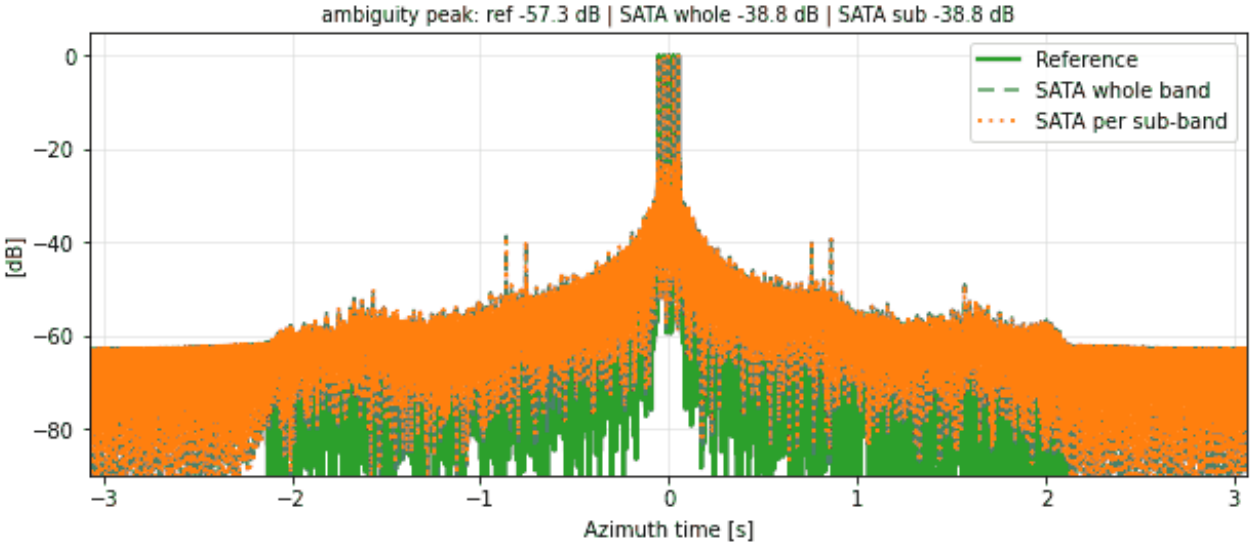





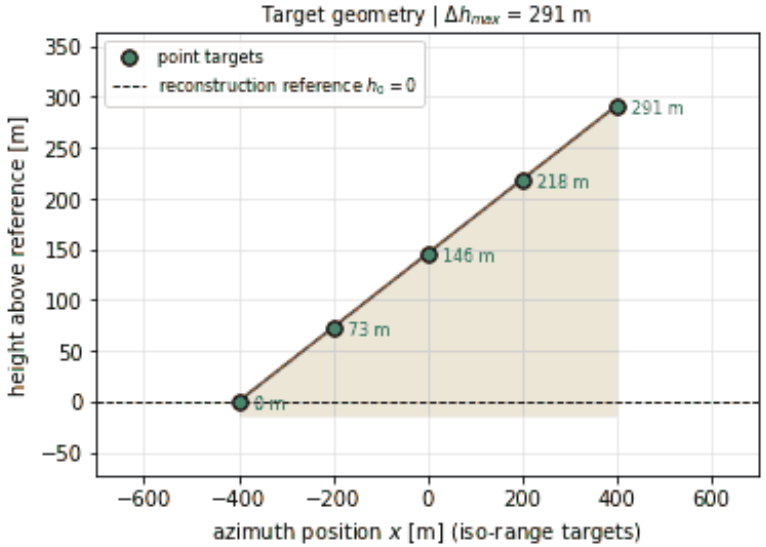



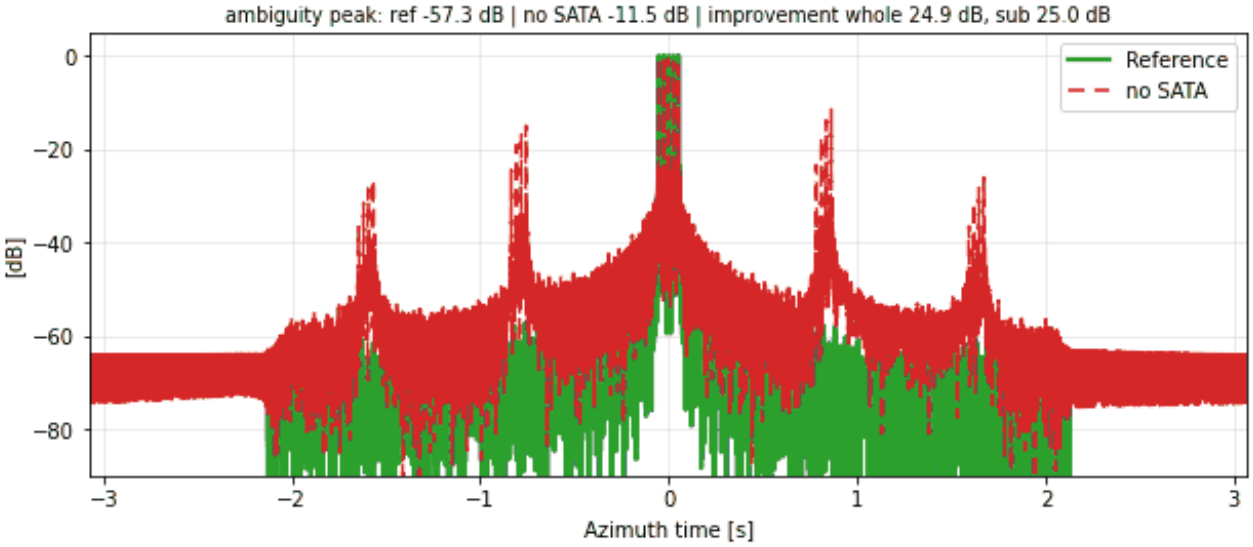



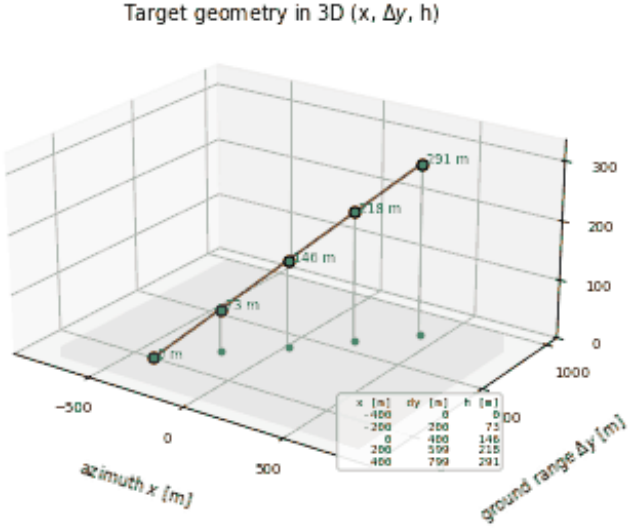
RA-SN-036 | SATA 1D | along-track ramp: N = 5, $\alpha = 20°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

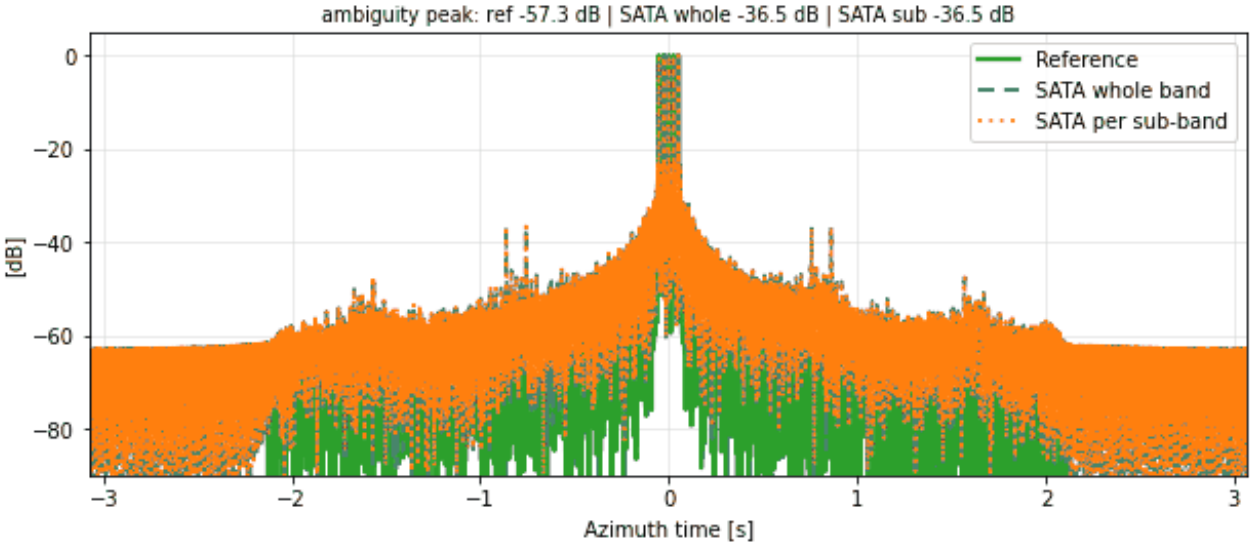






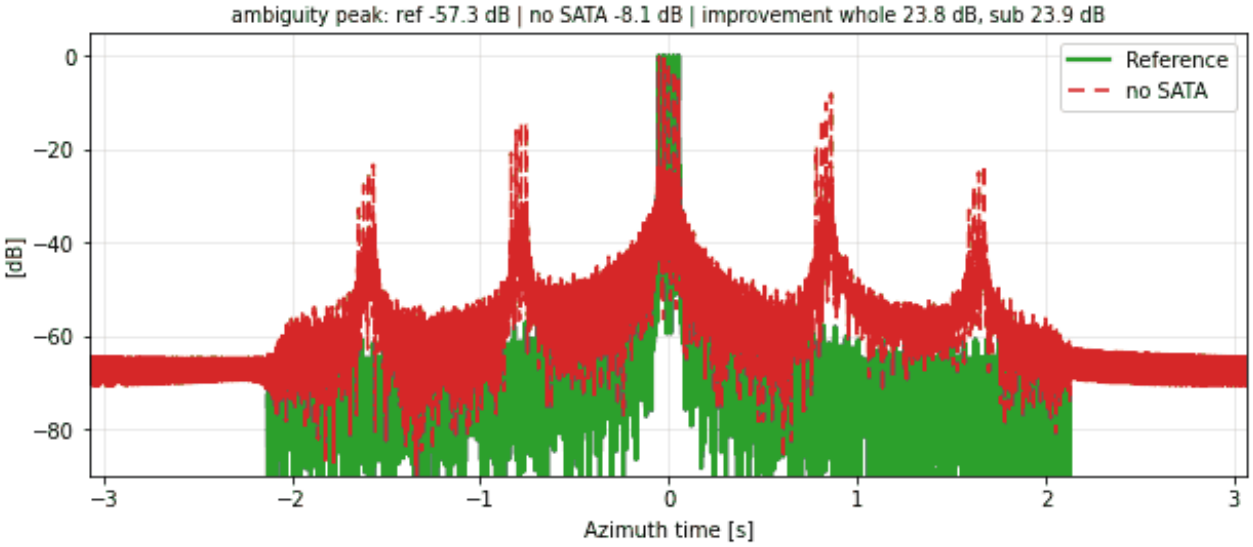



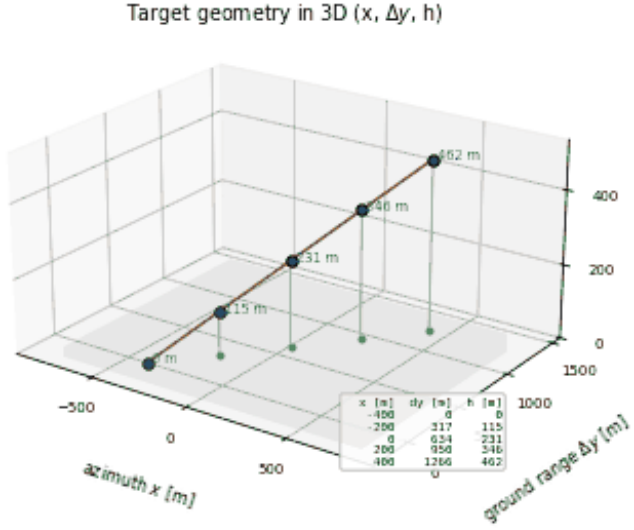



RA-SN-037 | SATA 1D | along-track ramp: N = 5, $\alpha = 30°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a = 1235$ Hz | $\Delta b_{at} = 7.69$ m (DPCA)

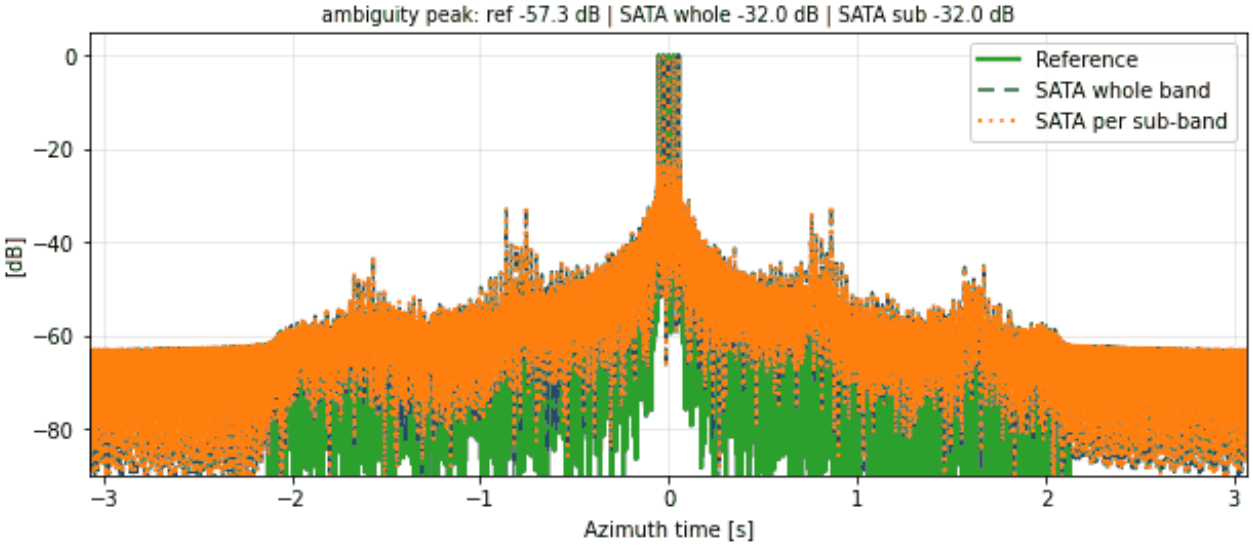

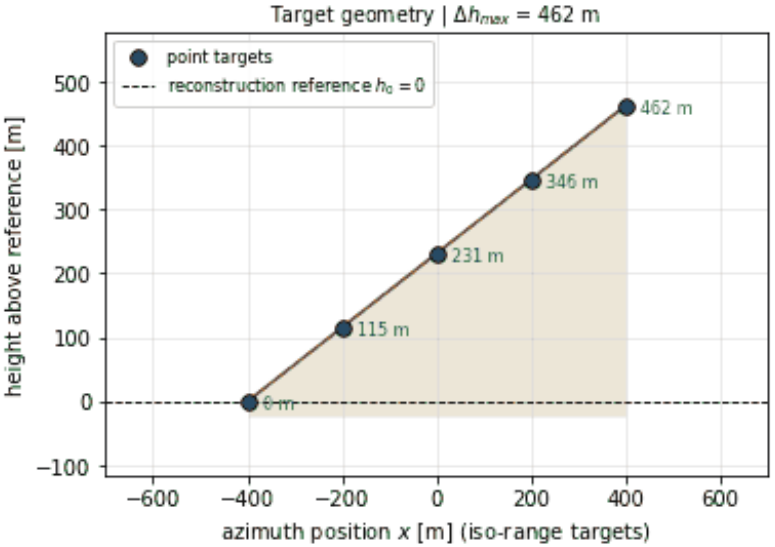



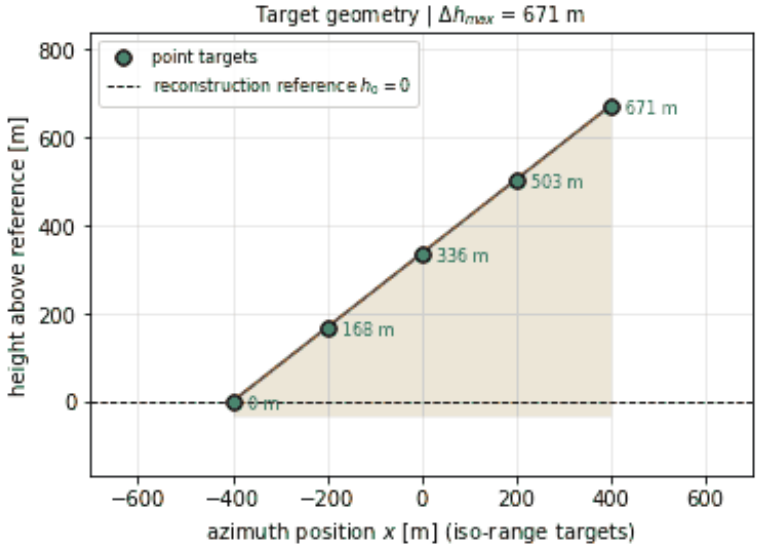



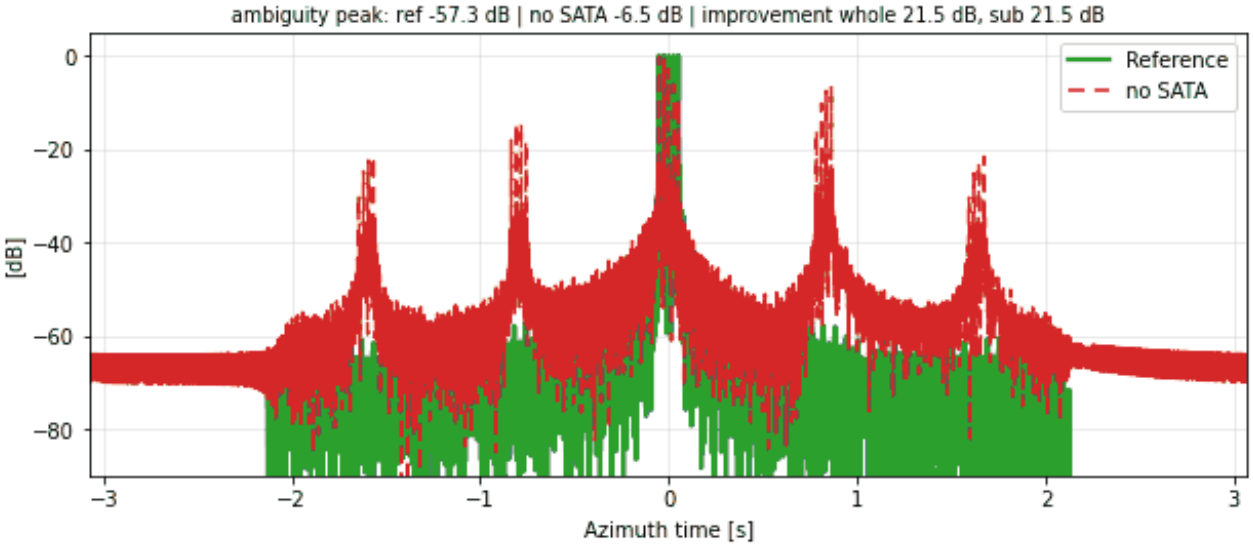



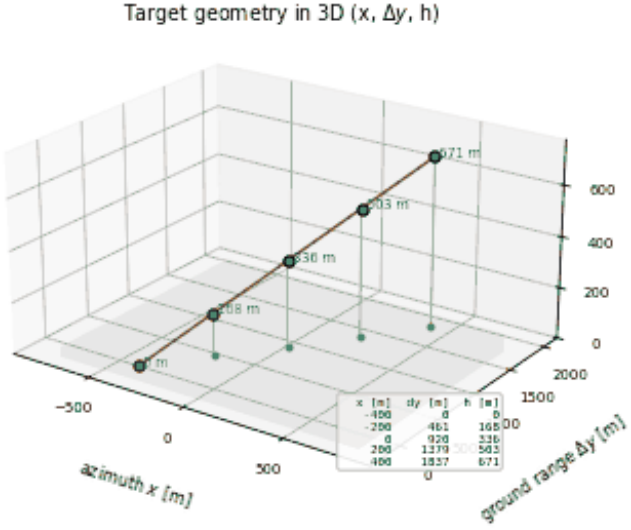
RA-SN-038 | SATA 1D | along-track ramp: N = 5, $\alpha = 40°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

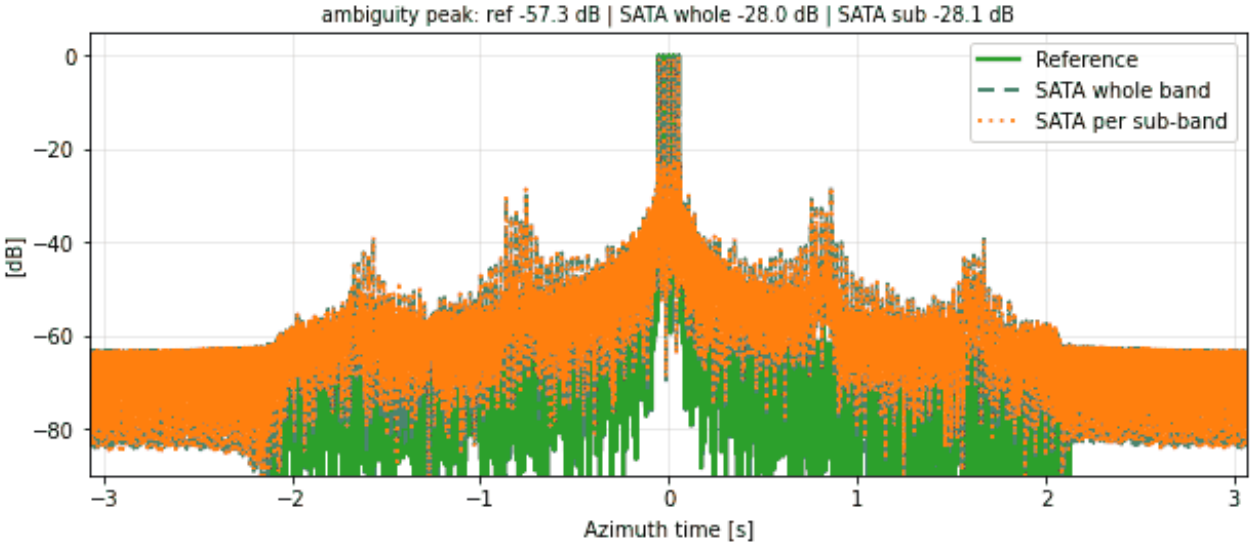






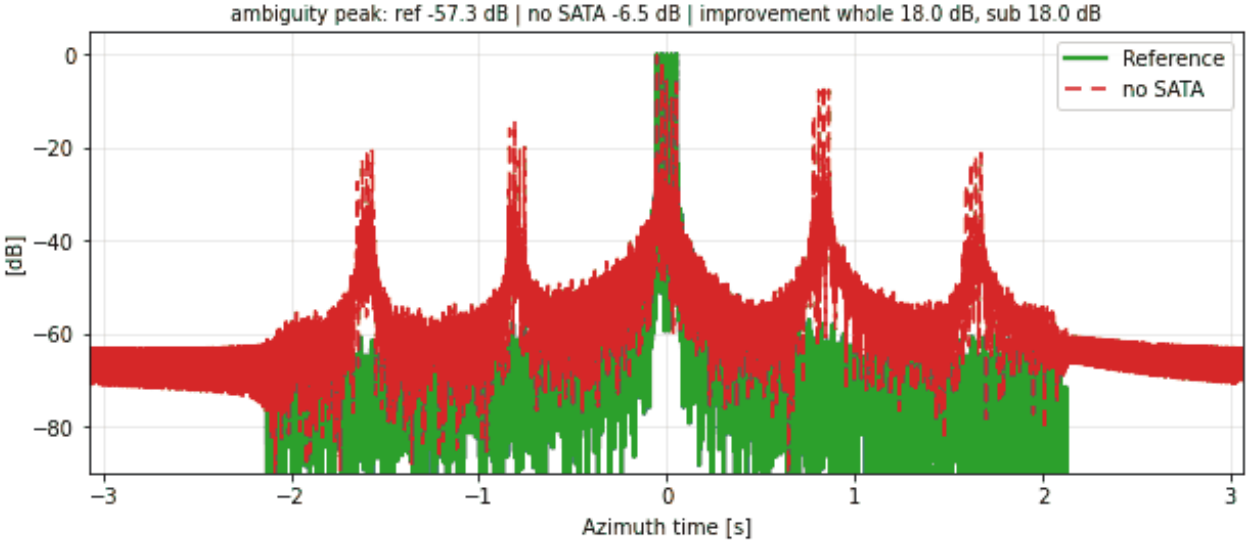



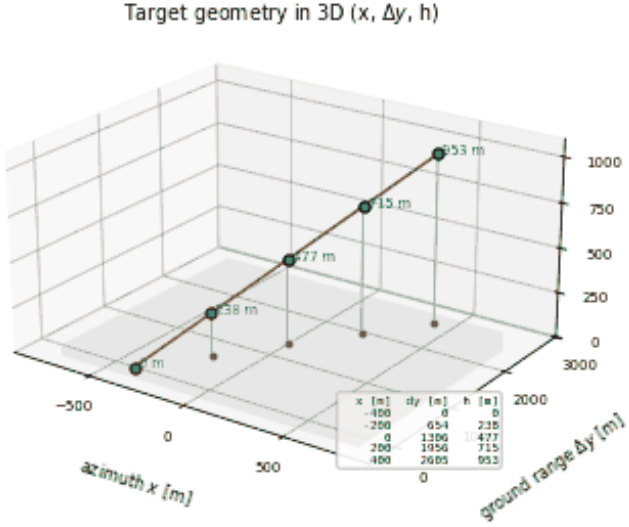



RA-SN-039 | SATA 1D | along-track ramp: N = 5, $\alpha = 50°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

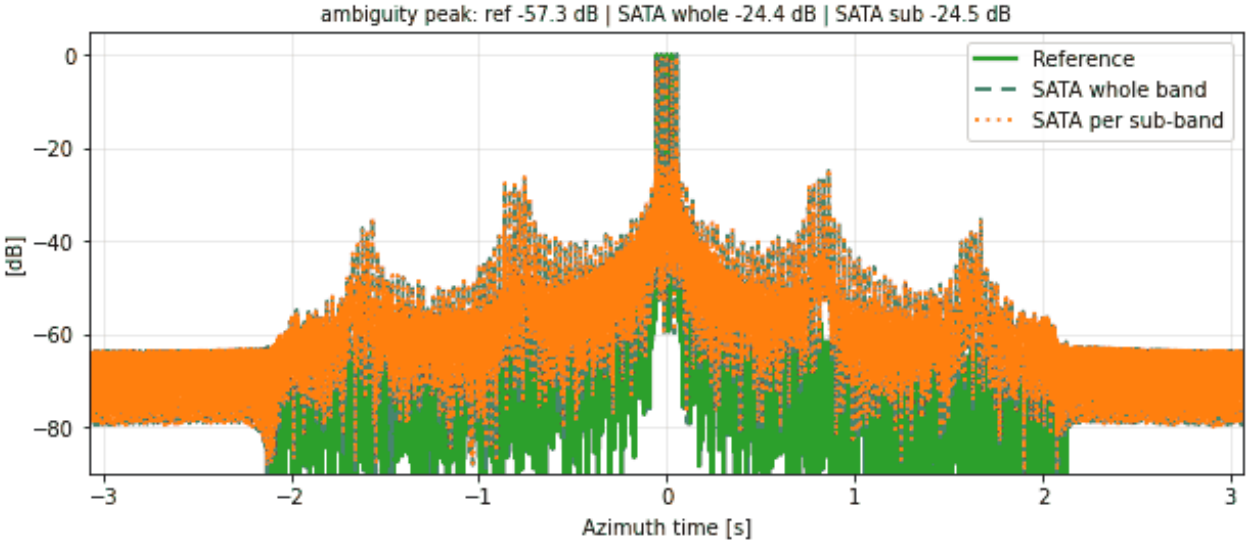


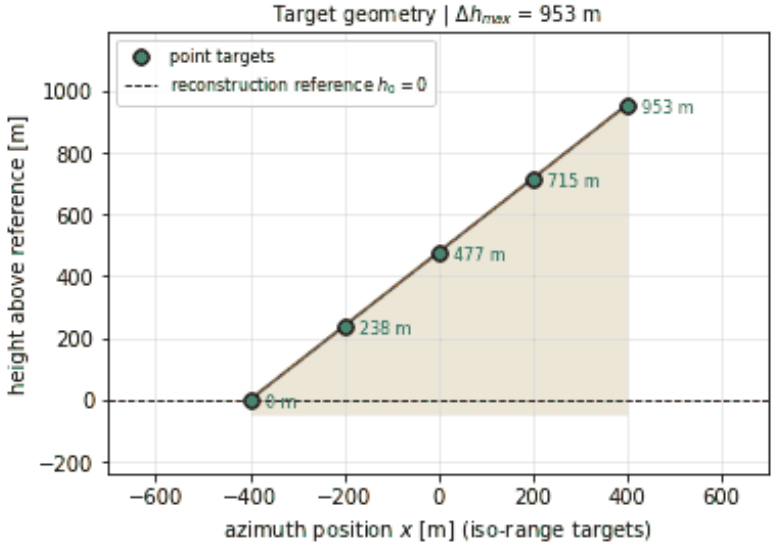



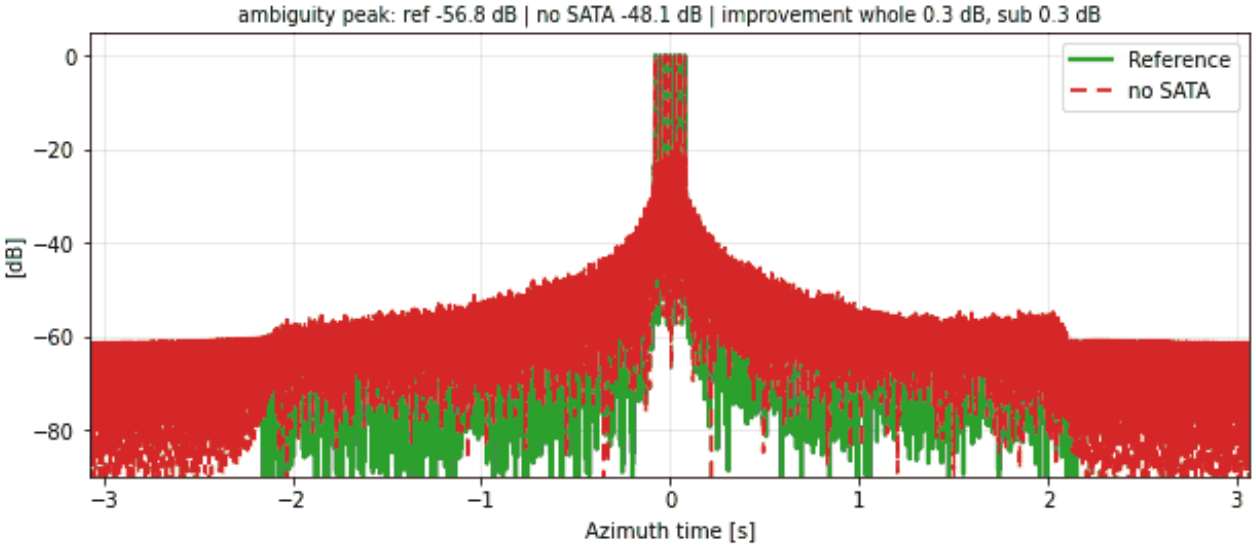



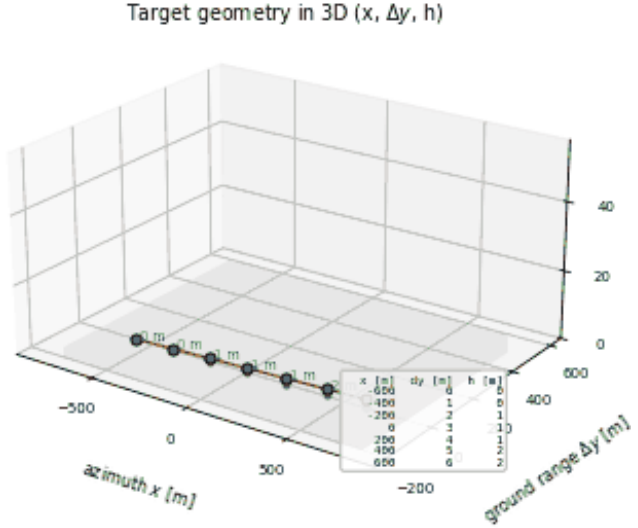



RA-SN-040 | SATA 1D | along-track ramp: N = 7, $\alpha = 0.1^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

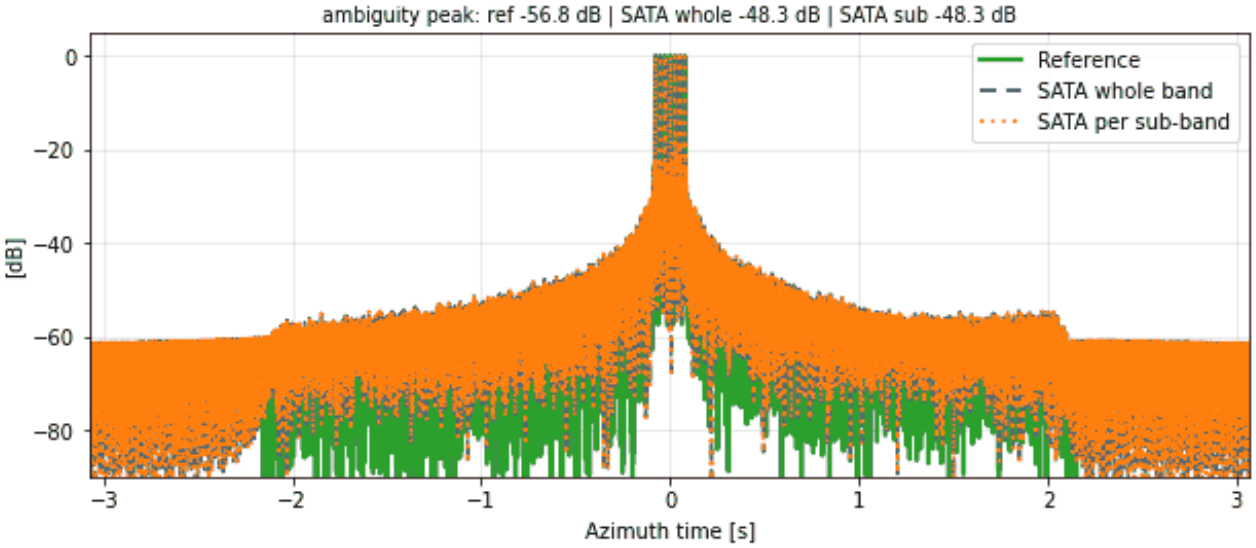

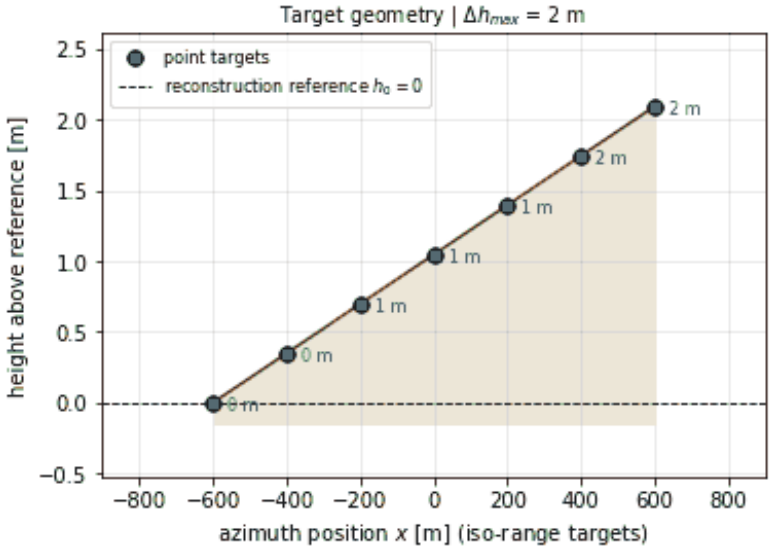



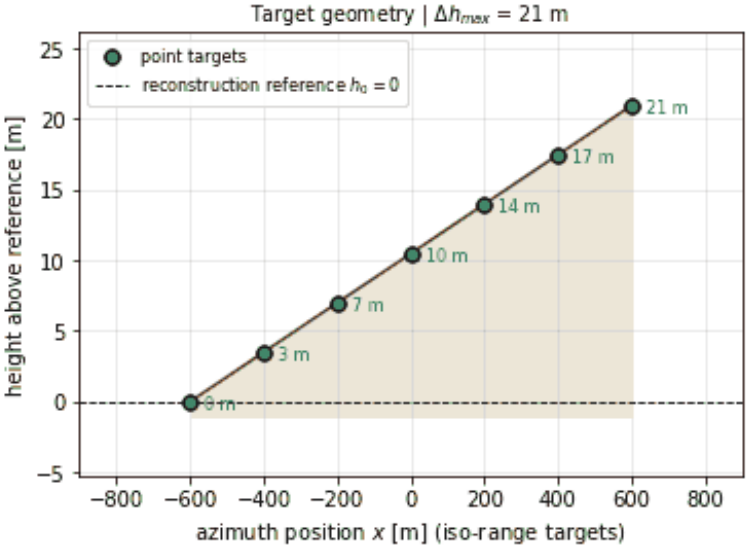



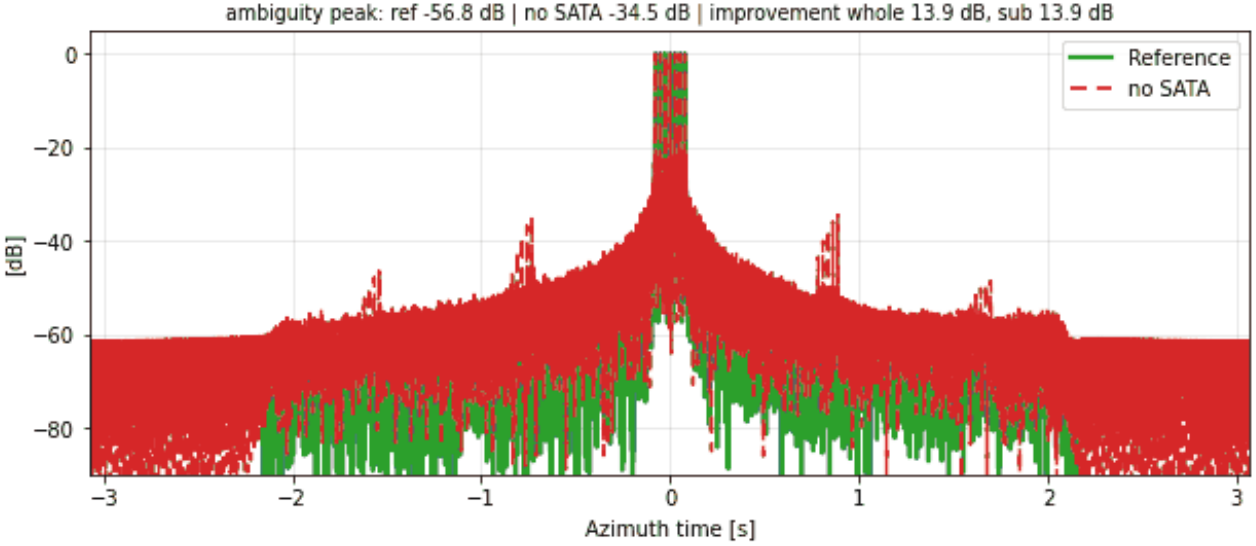



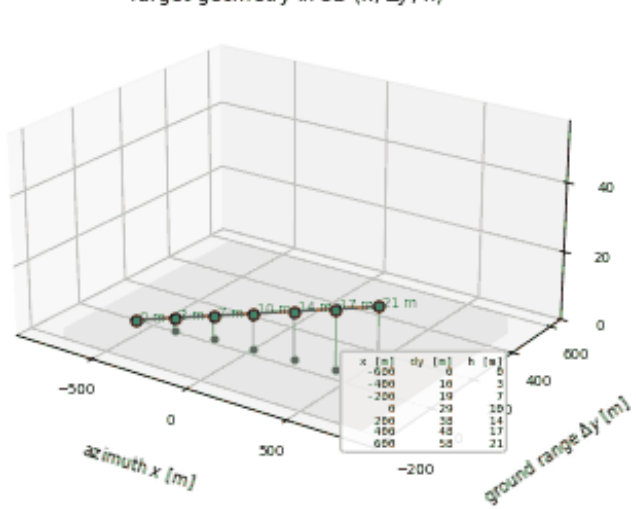
RA-SN-041 | SATA 1D | along-track ramp: N = 7, $\alpha = 1^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

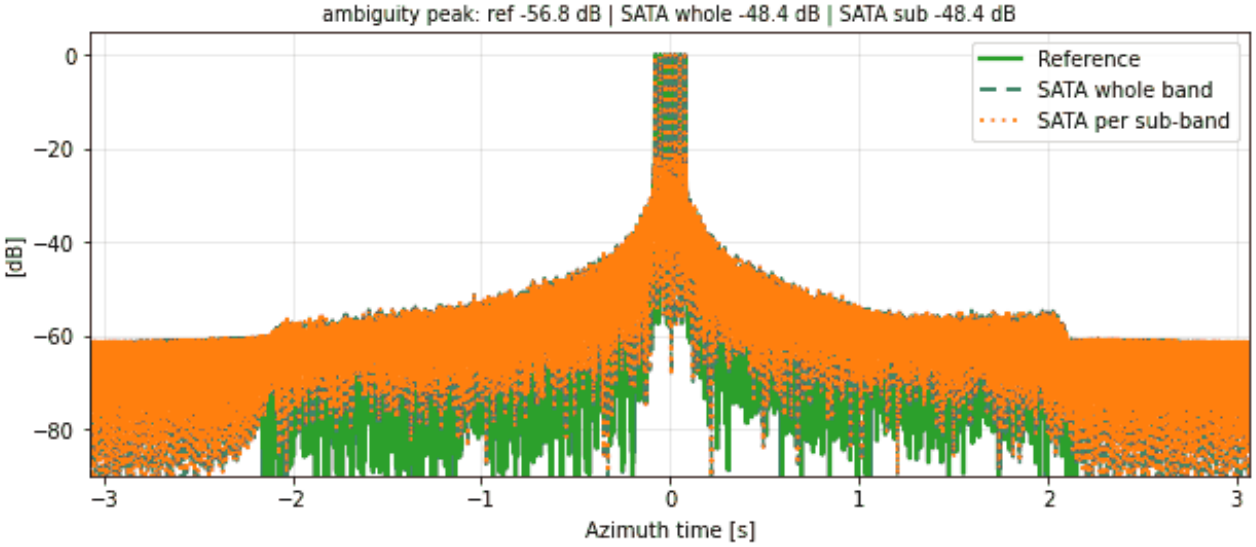






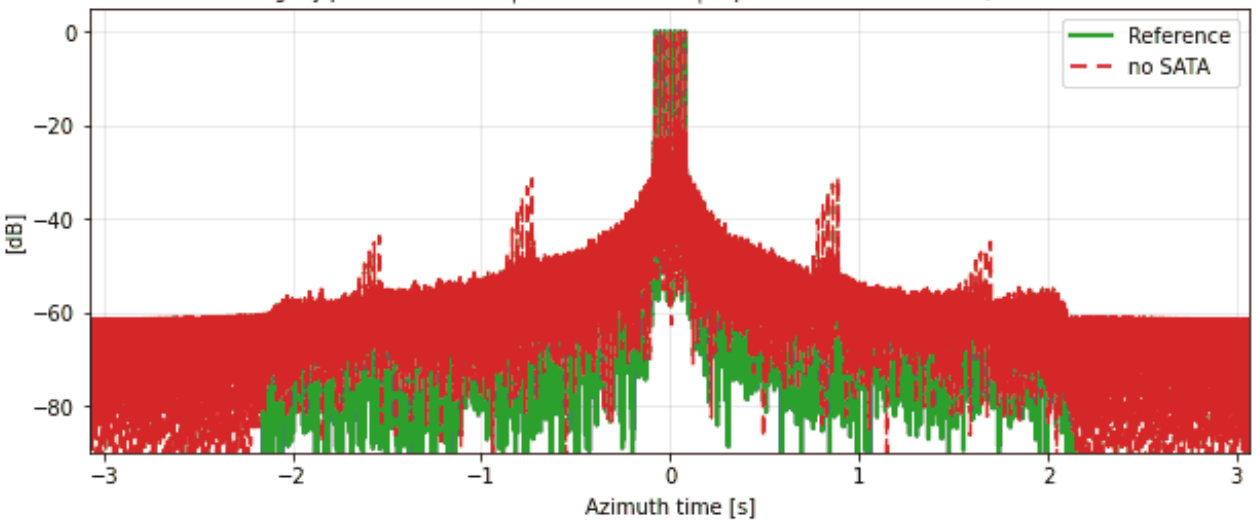



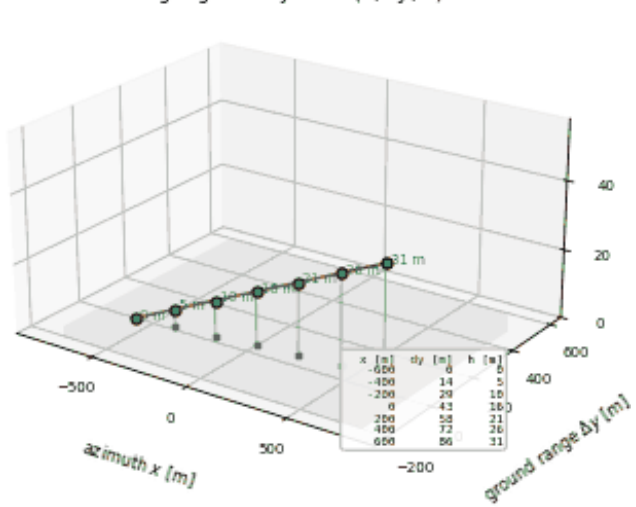



RA-SN-042 | SATA 1D | along-track ramp: N = 7, $\alpha = 1.5°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

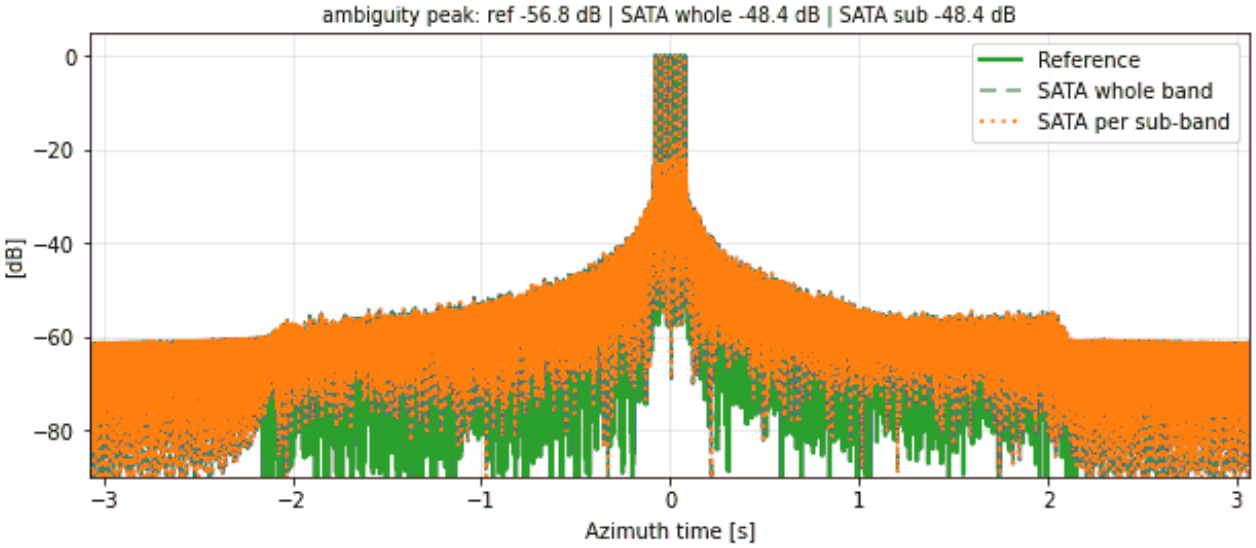

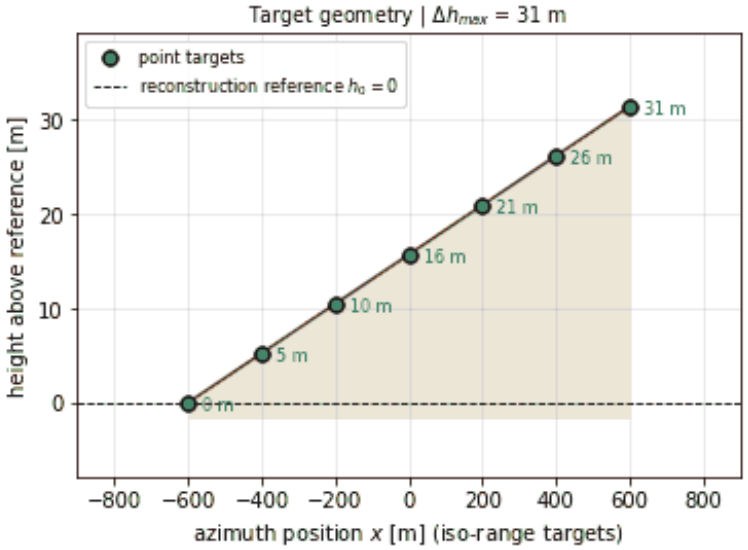



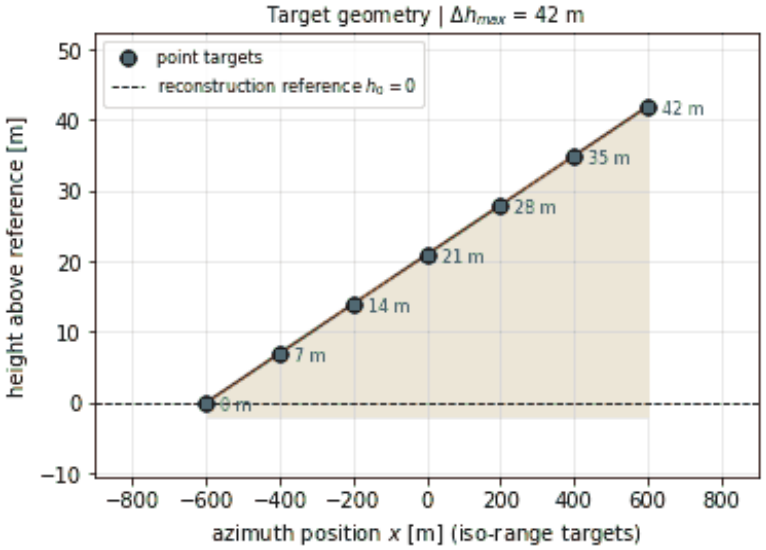



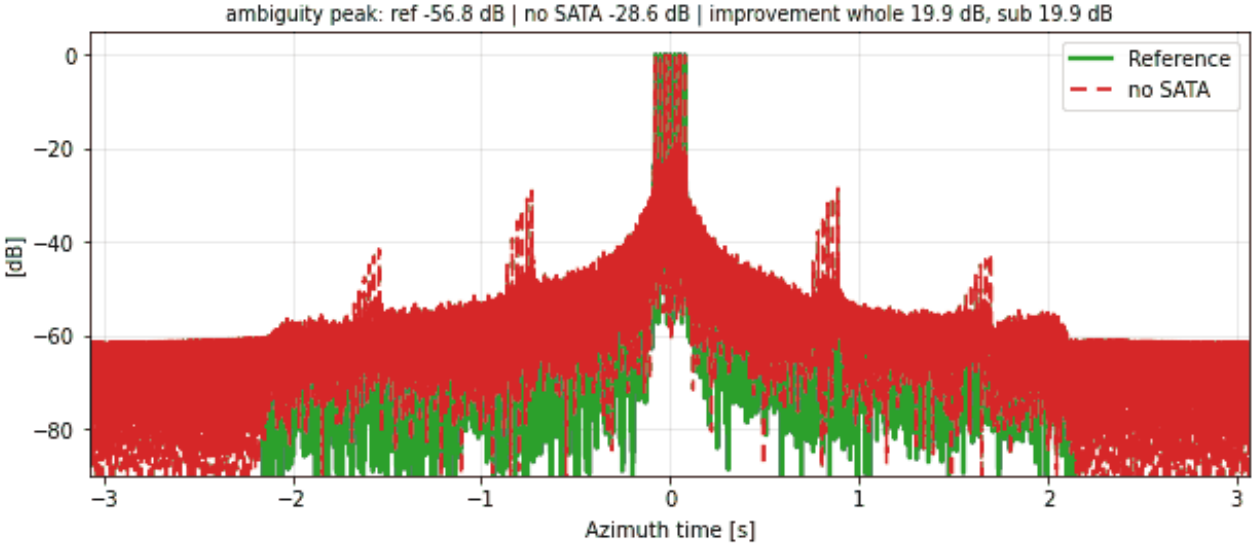



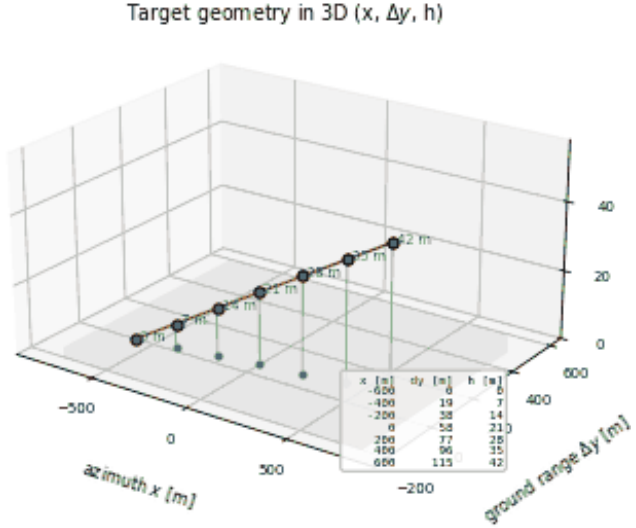
RA-SN-043 | SATA 1D | along-track ramp: N = 7, $\alpha = 2^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

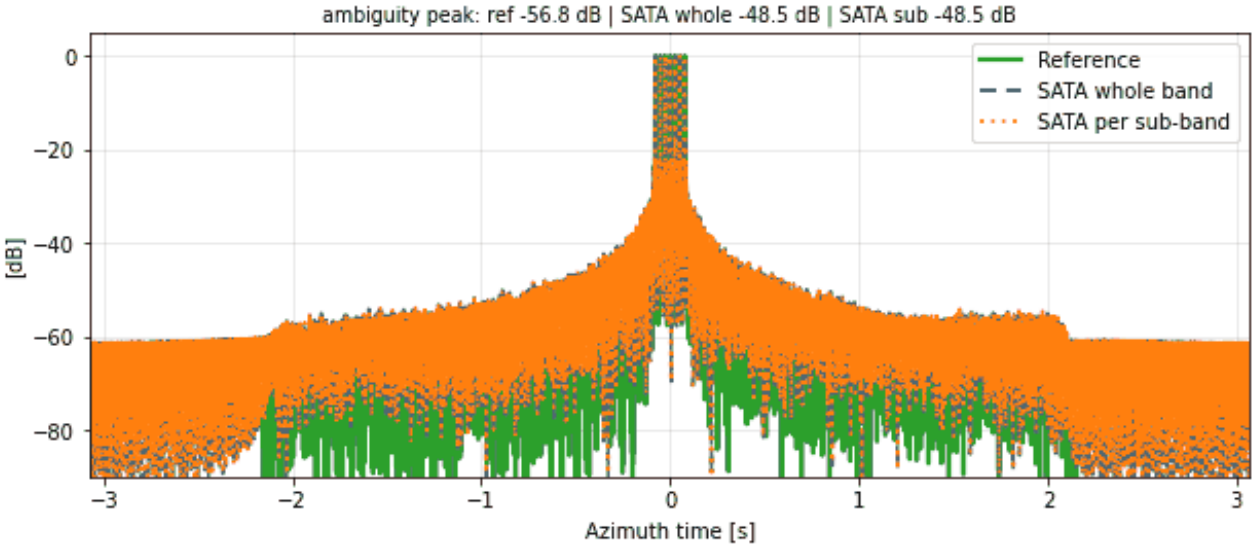






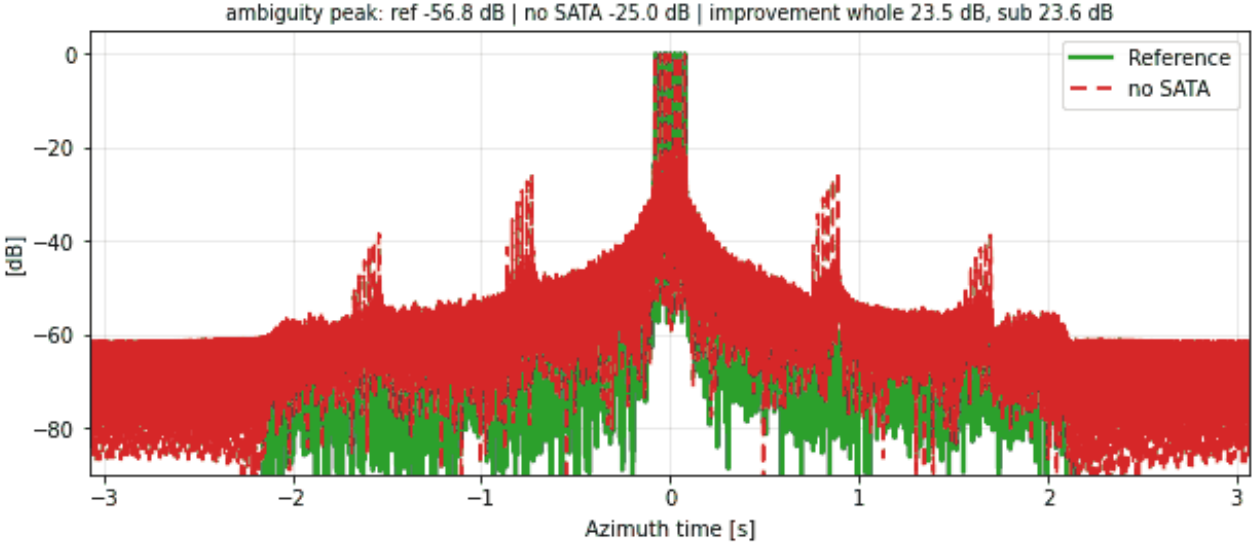



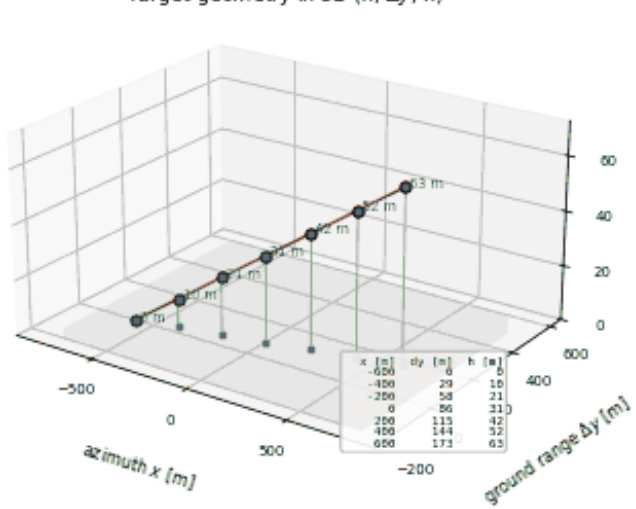



RA-SN-044 | SATA 1D | along-track ramp: N = 7, $\alpha = 3^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

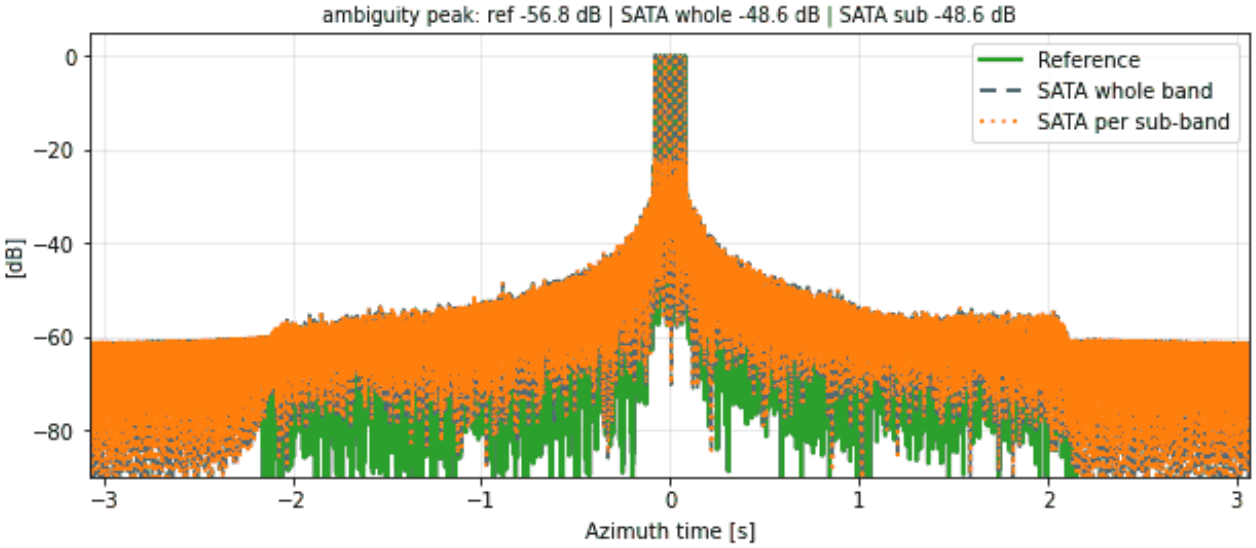


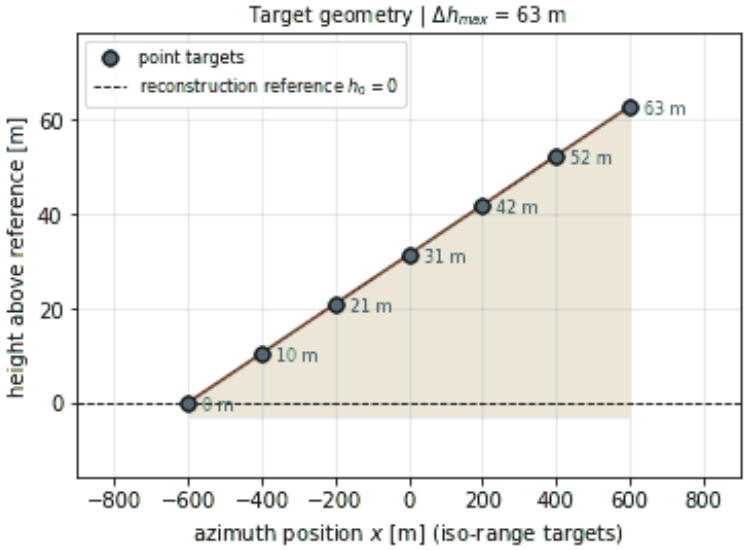



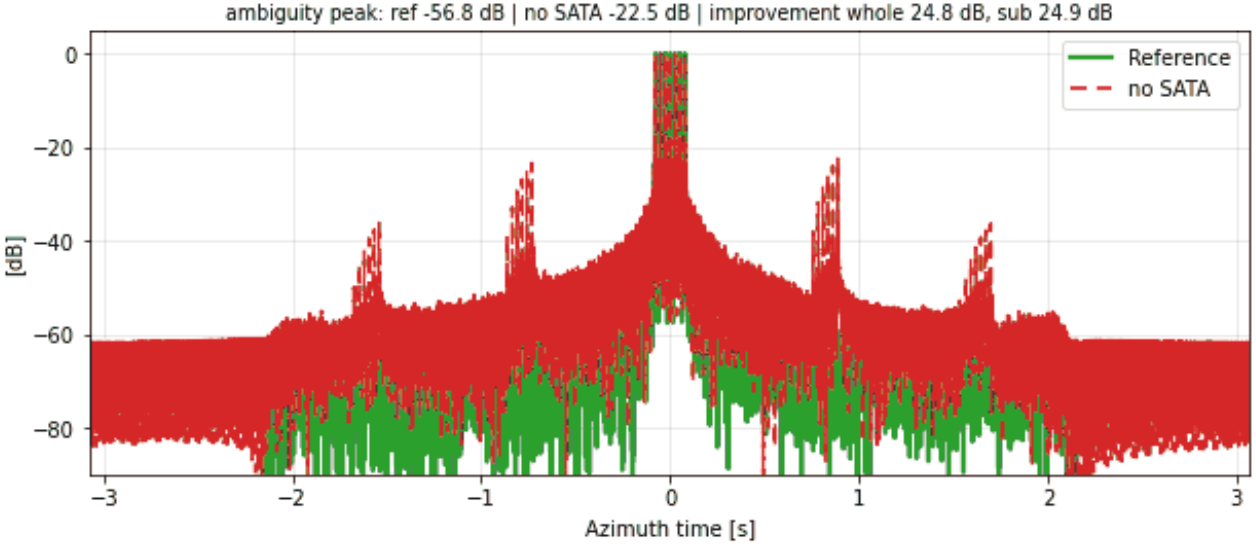



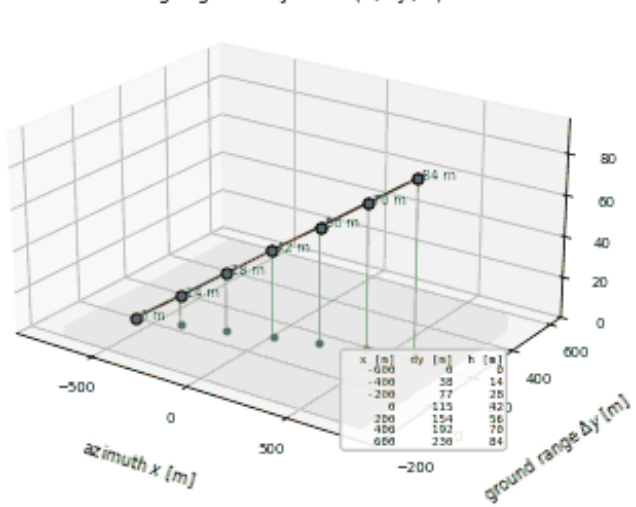



RA-SN-045 | SATA 1D | along-track ramp: N = 7, $\alpha = 4°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

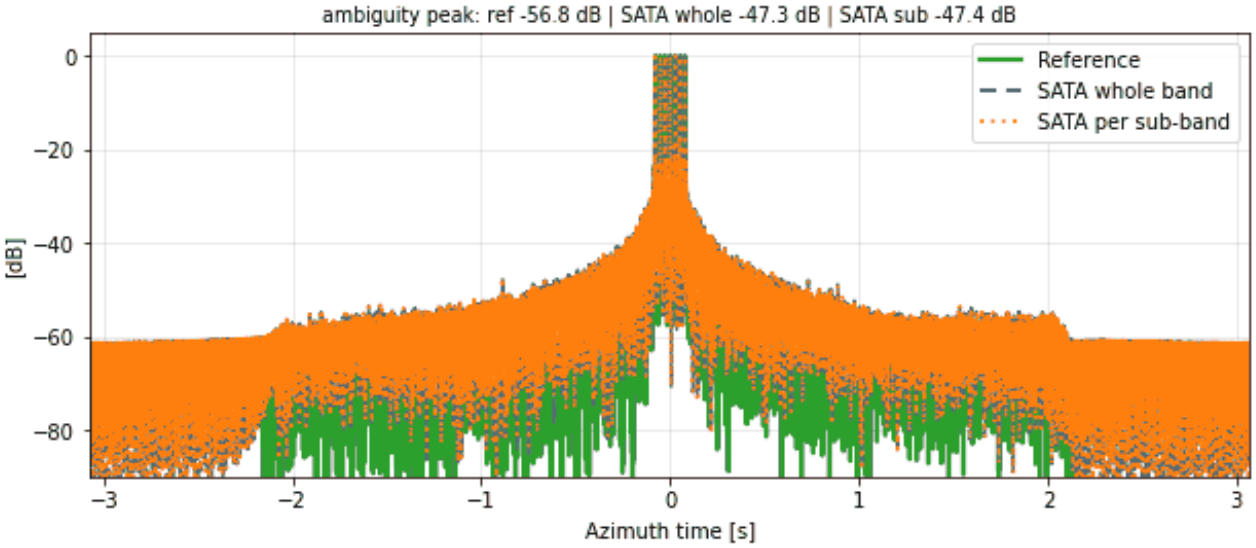


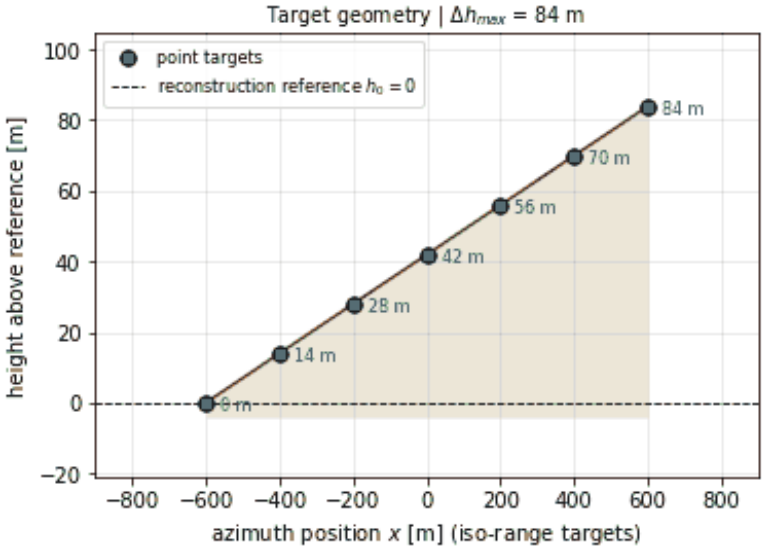



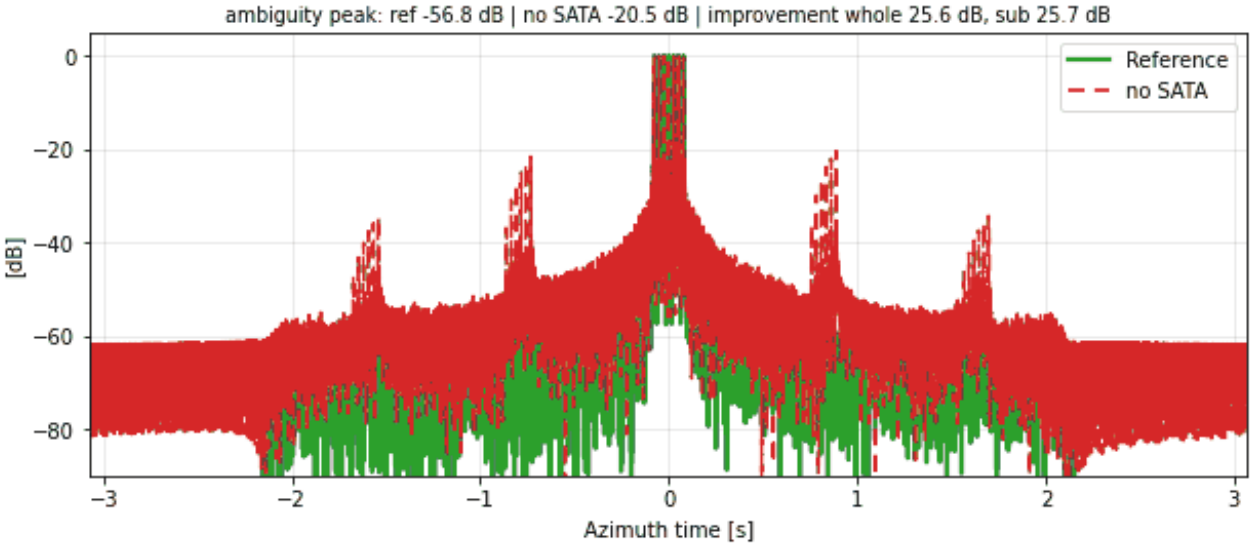



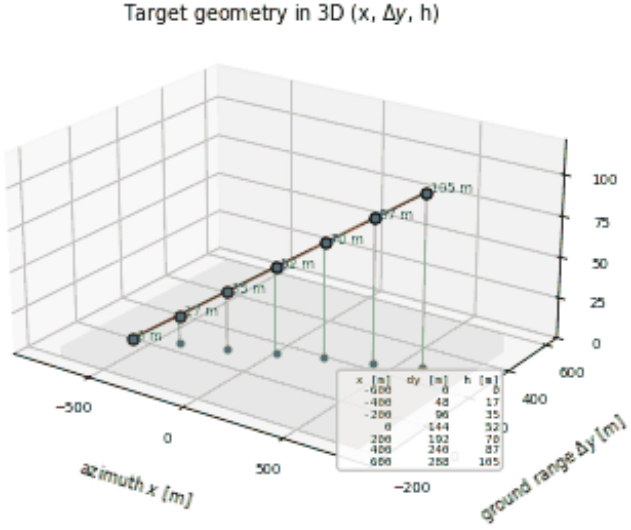



RA-SN-046 | SATA 1D | along-track ramp: N = 7, $\alpha = 5^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

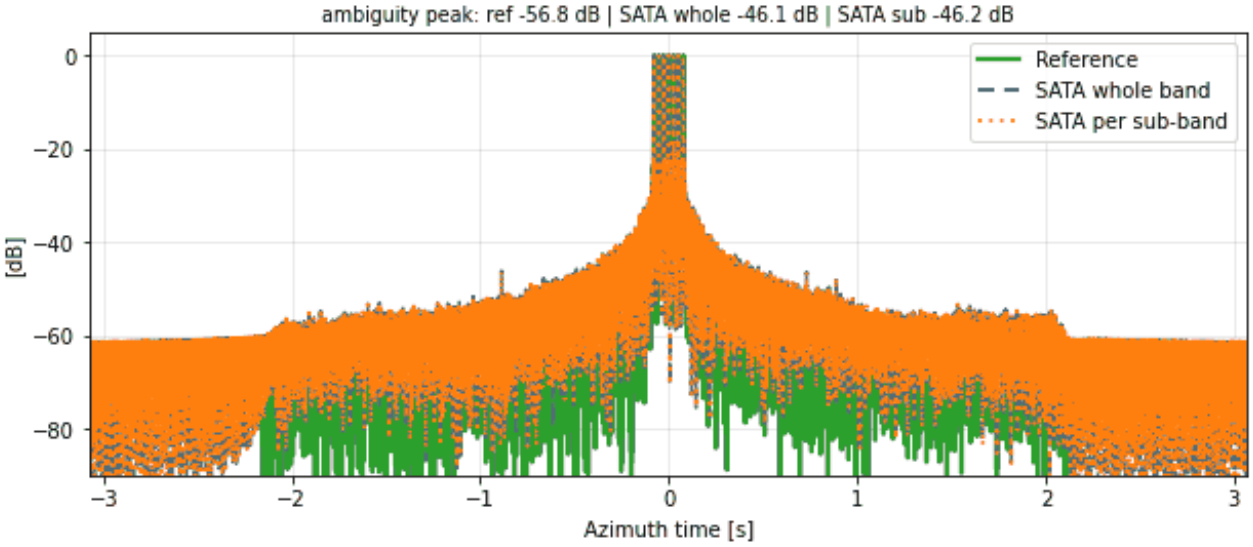


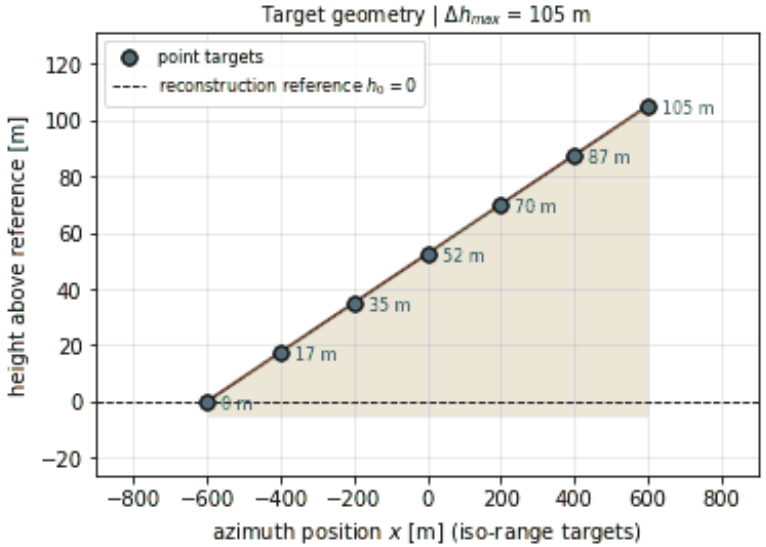



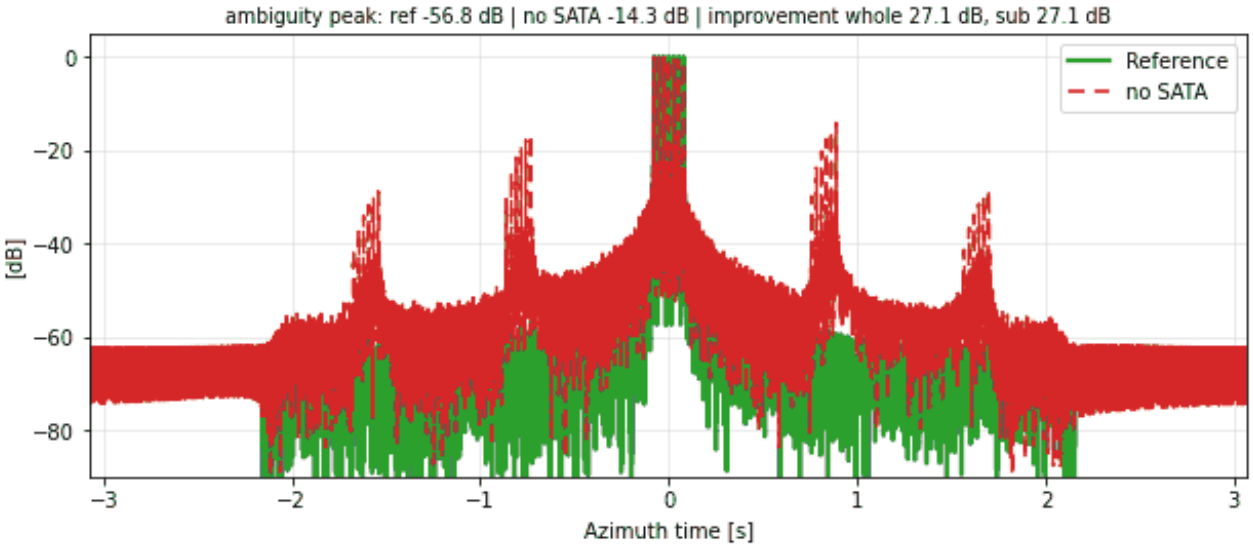



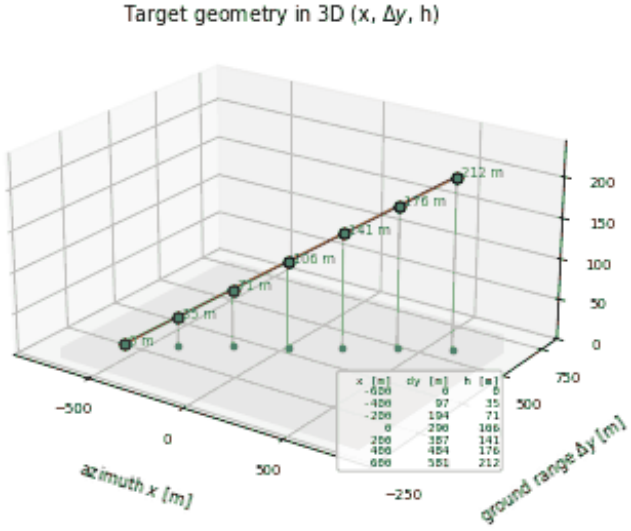



RA-SN-047 | SATA 1D | along-track ramp: N = 7, $\alpha = 10^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

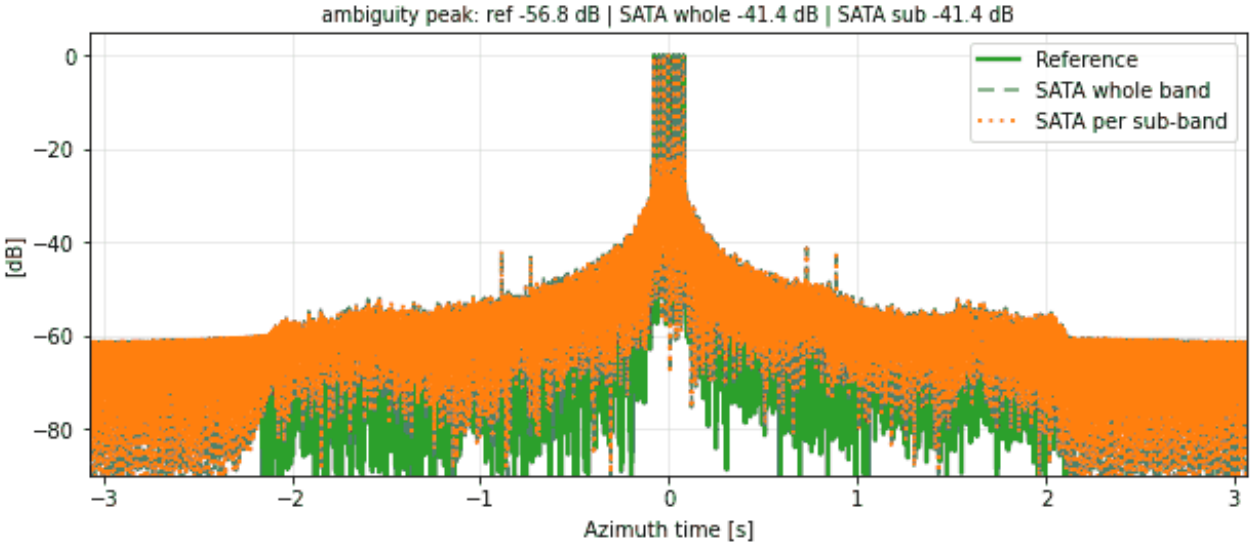

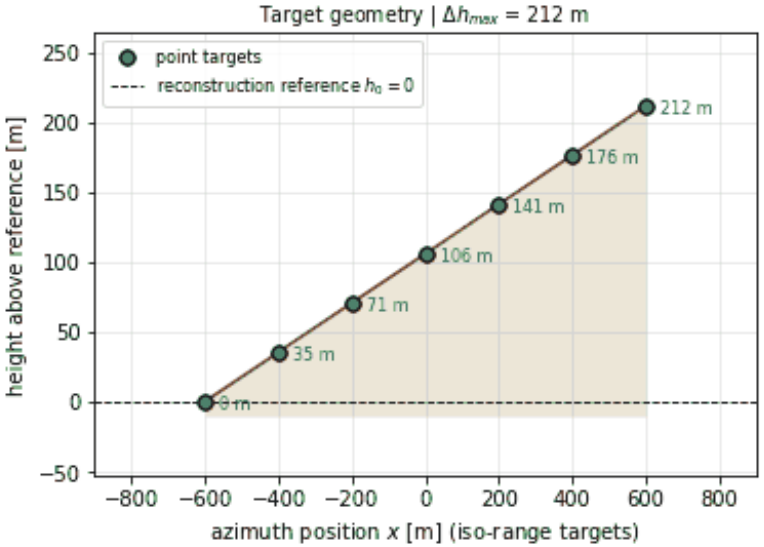



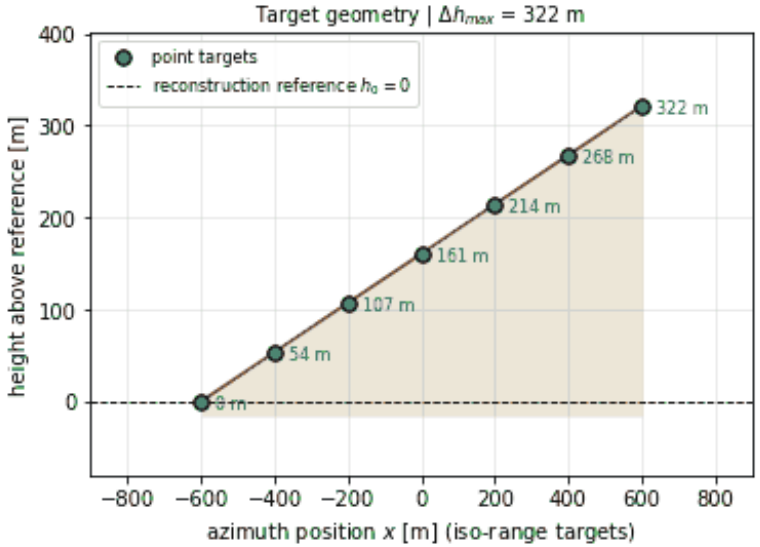



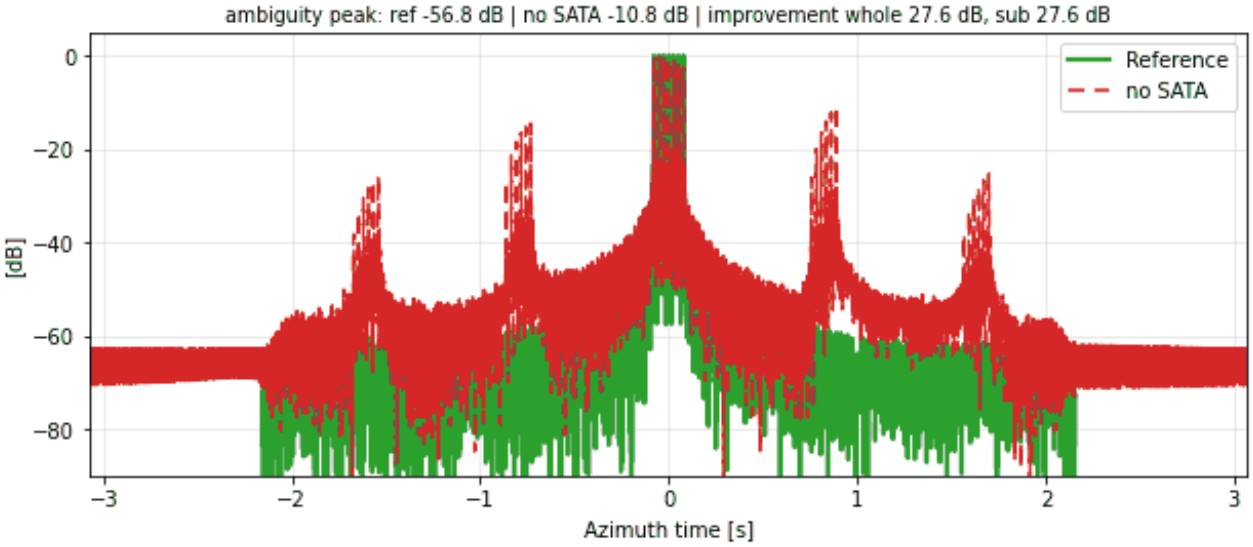



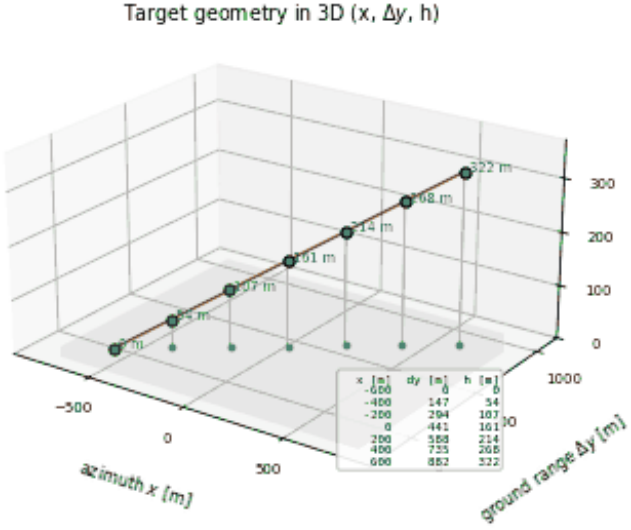
RA-SN-048 | SATA 1D | along-track ramp: N = 7, $\alpha = 15^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

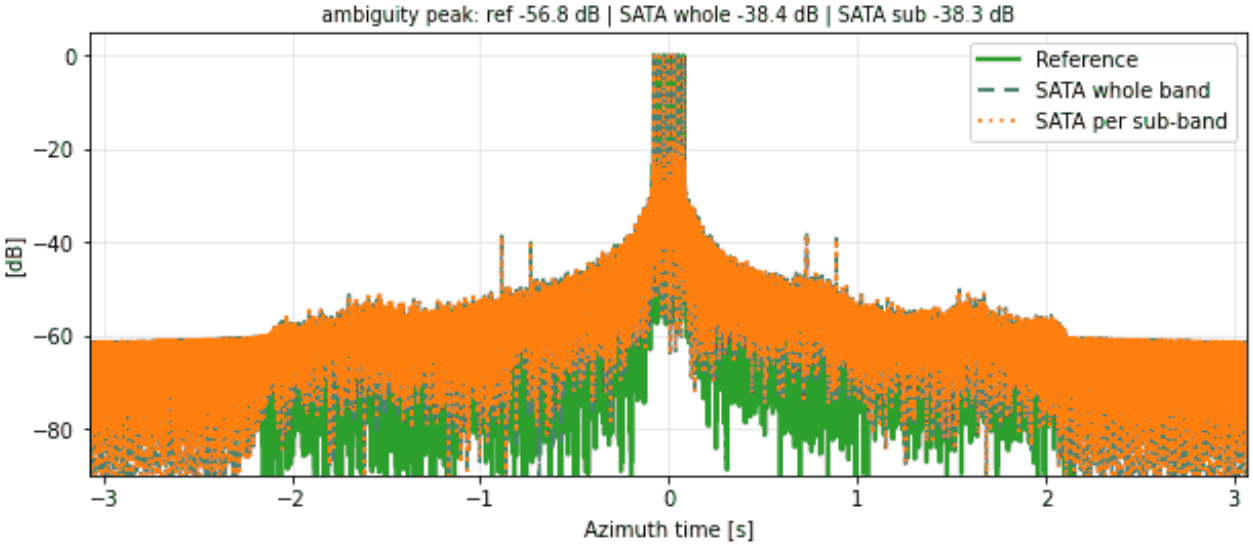





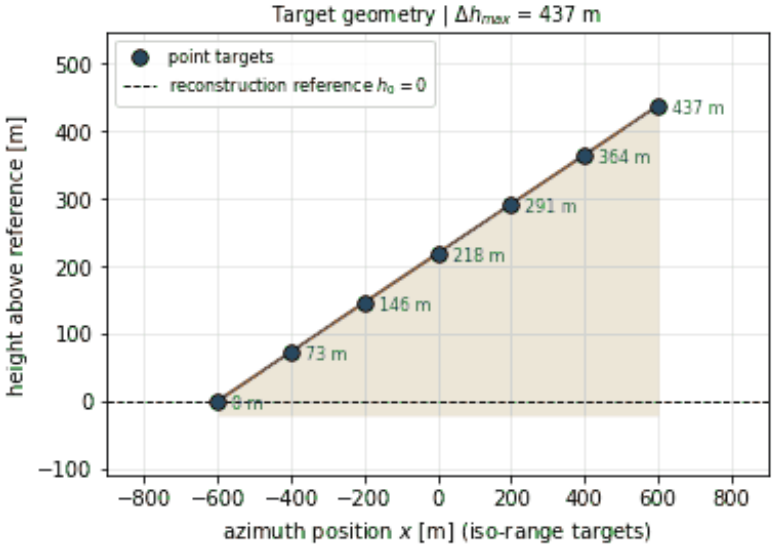



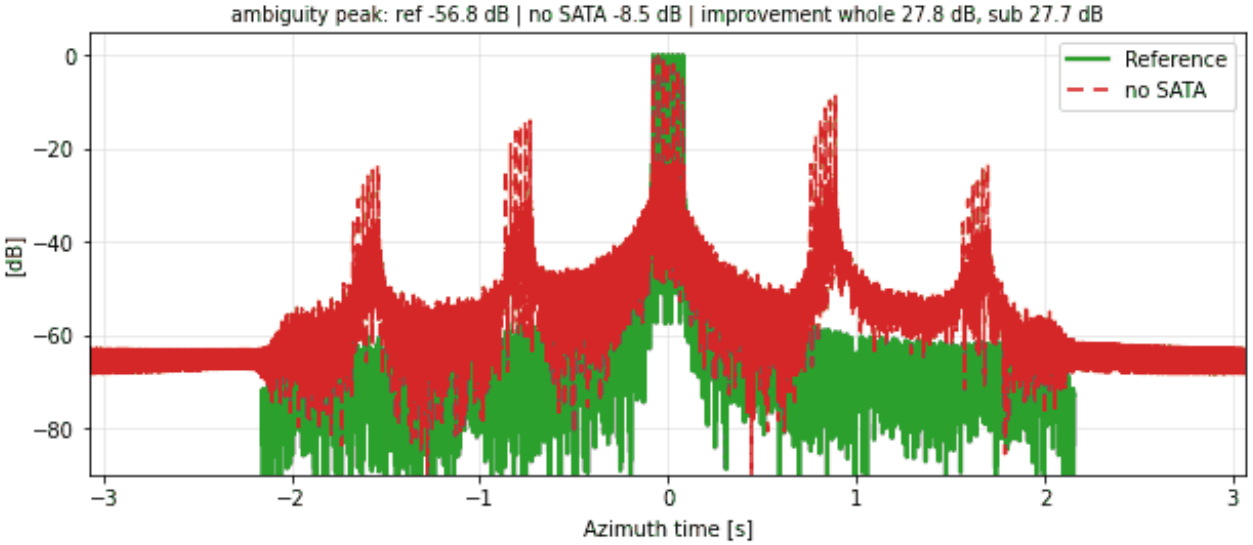



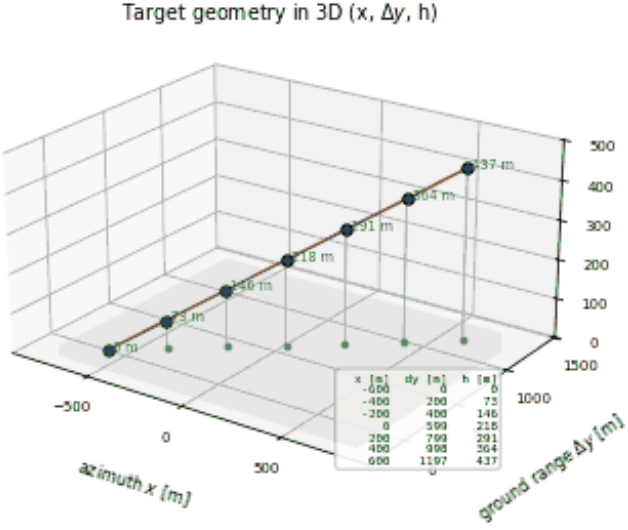
RA-SN-049 | SATA 1D | along-track ramp: N = 7, $\alpha = 20°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

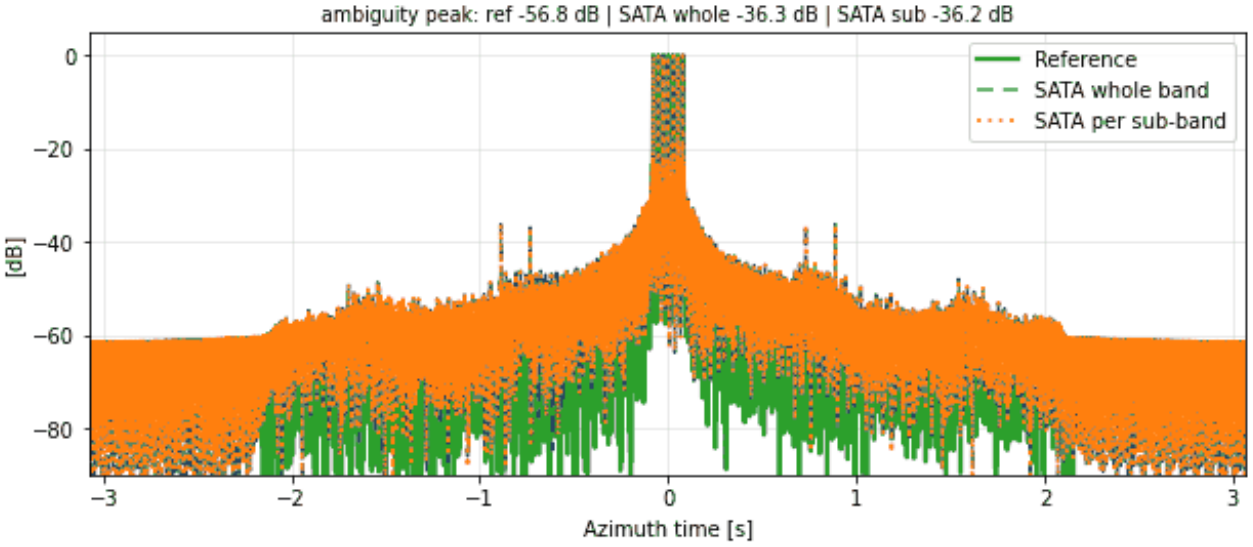





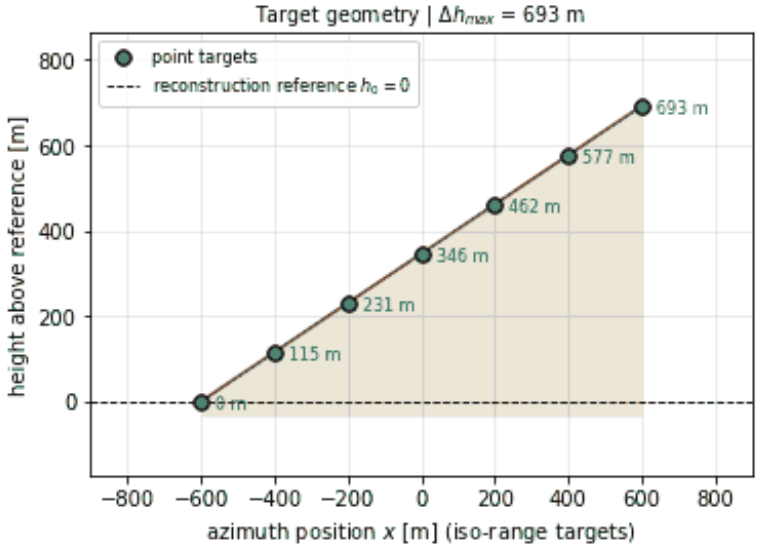



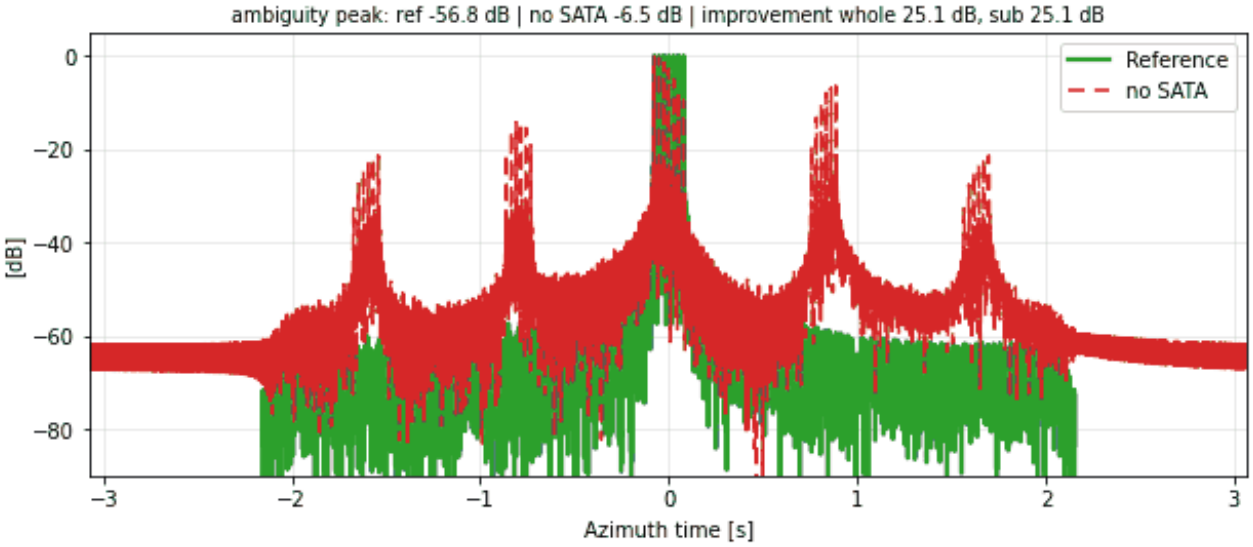



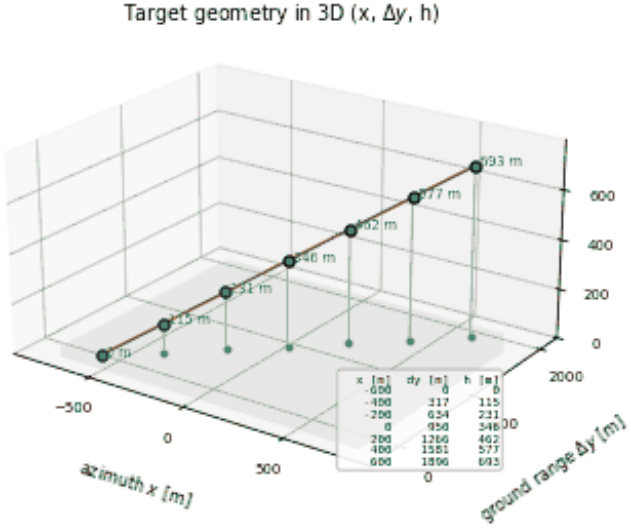
RA-SN-050 | SATA 1D | along-track ramp: N = 7, $\alpha = 30°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

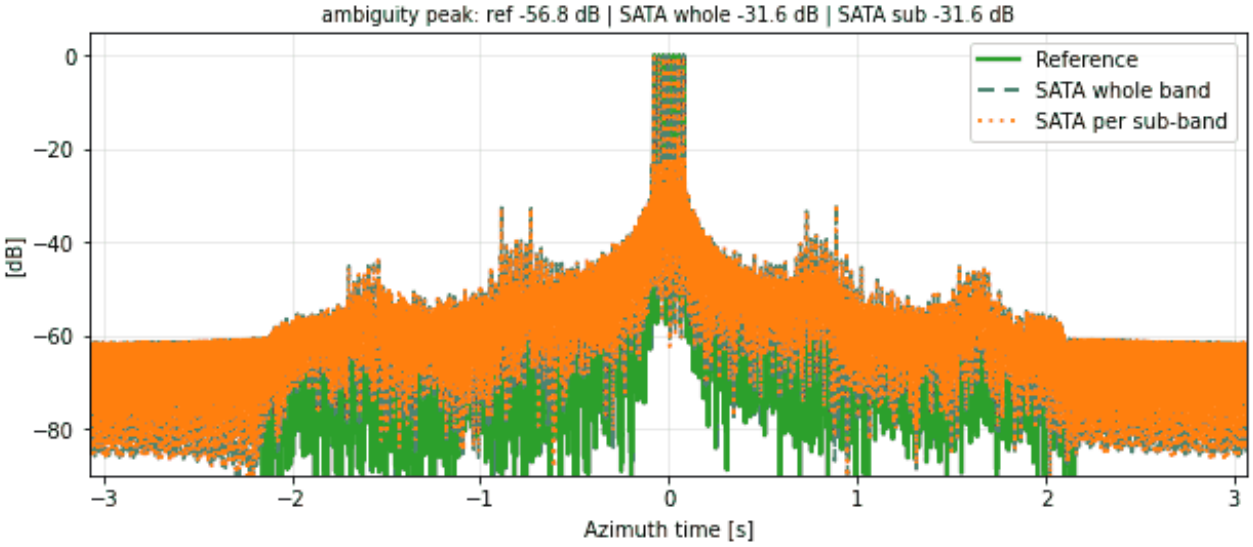






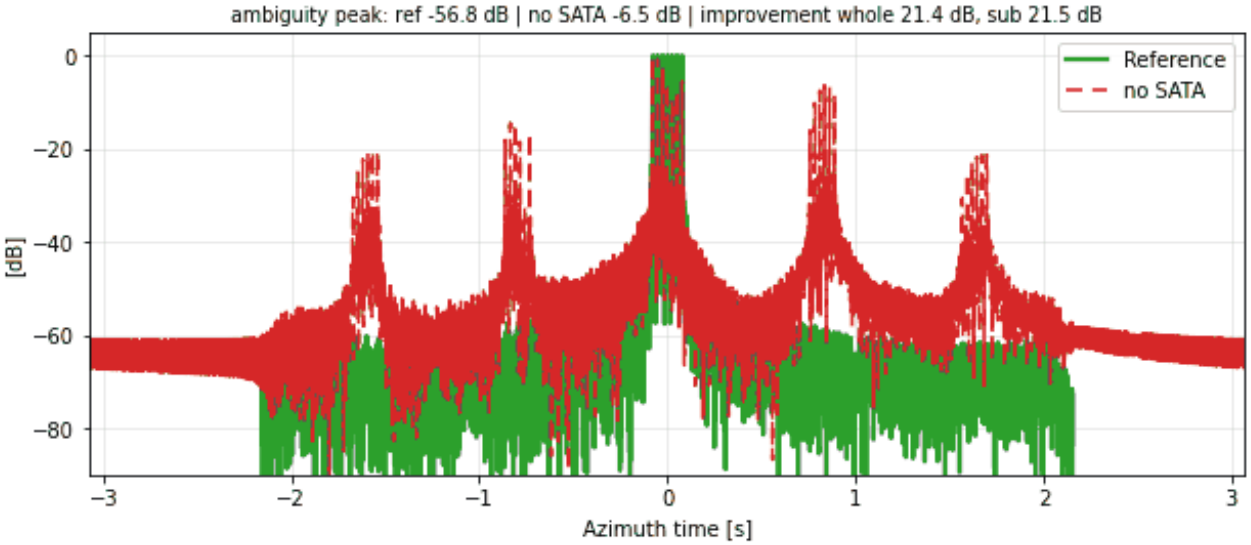



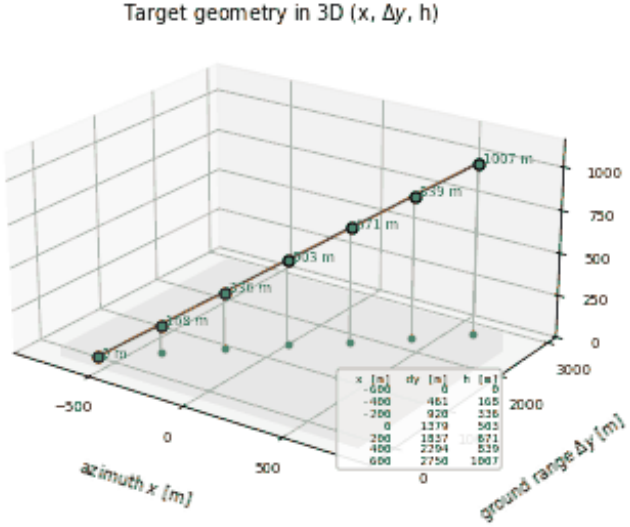



RA-SN-051 | SATA 1D | along-track ramp: N = 7, $\alpha = 40°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

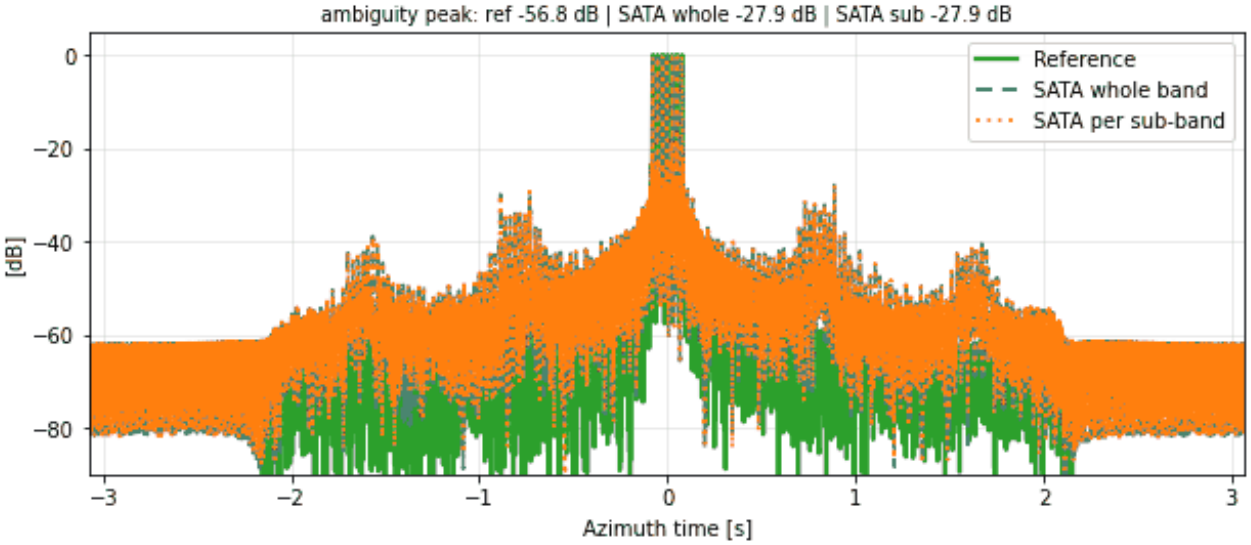


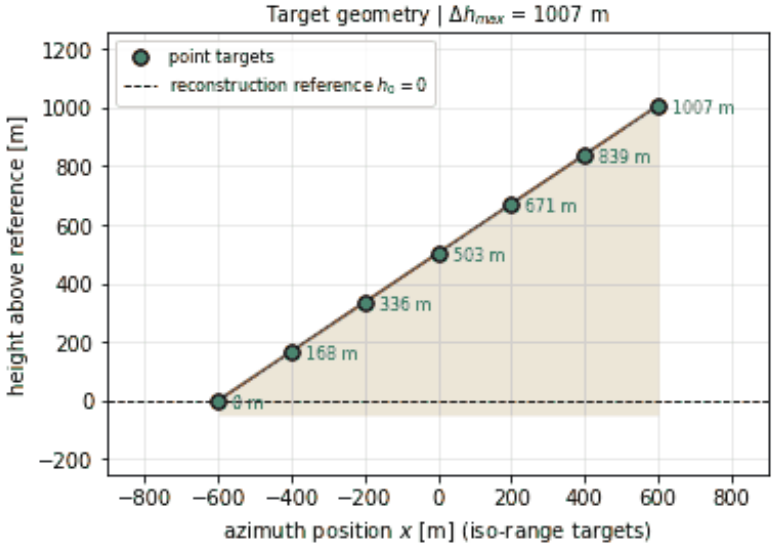



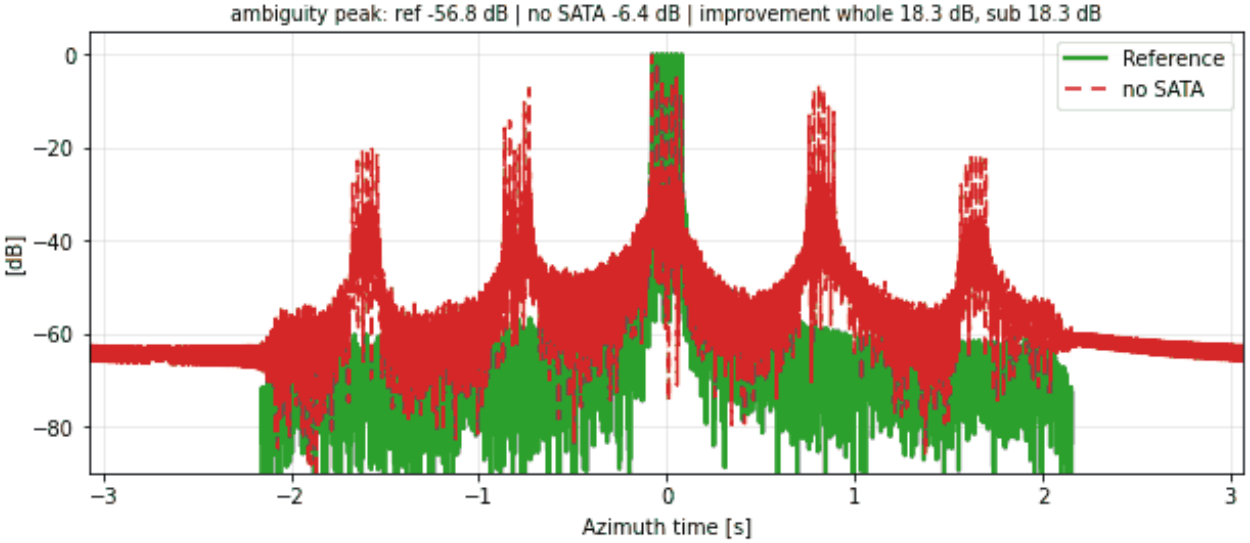



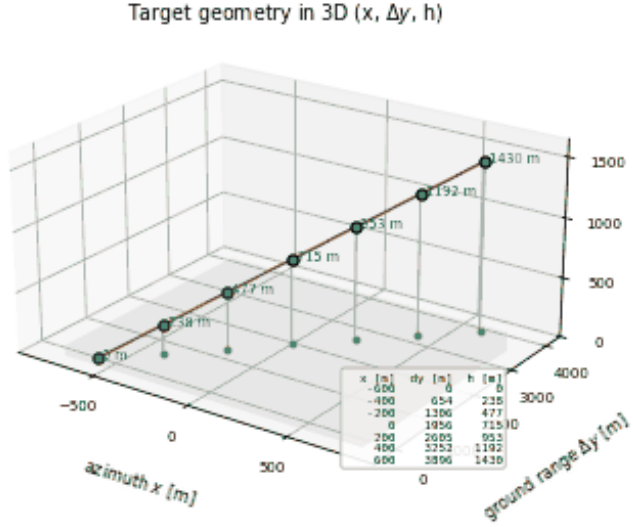



RA-SN-052 | SATA 1D | along-track ramp: N = 7, $\alpha = 50°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

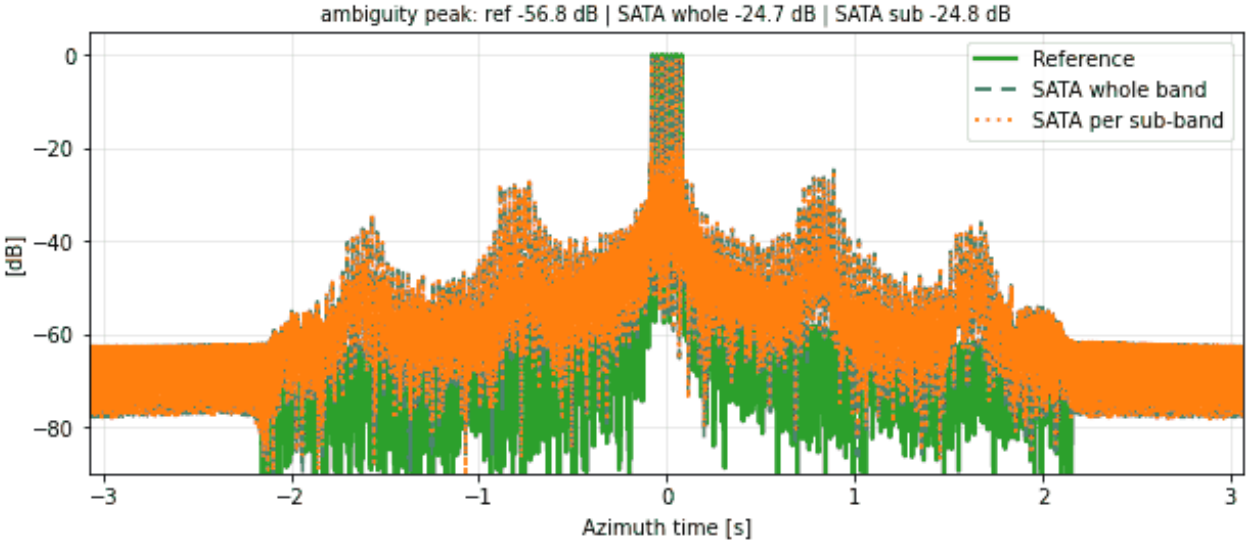


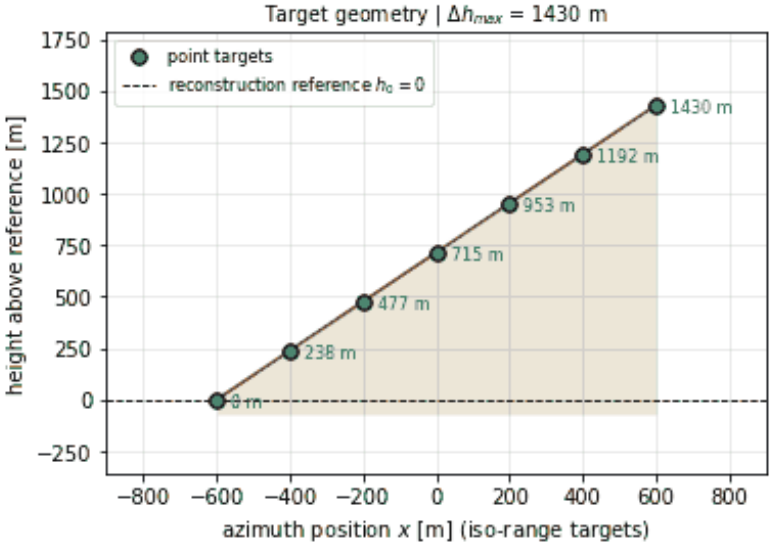



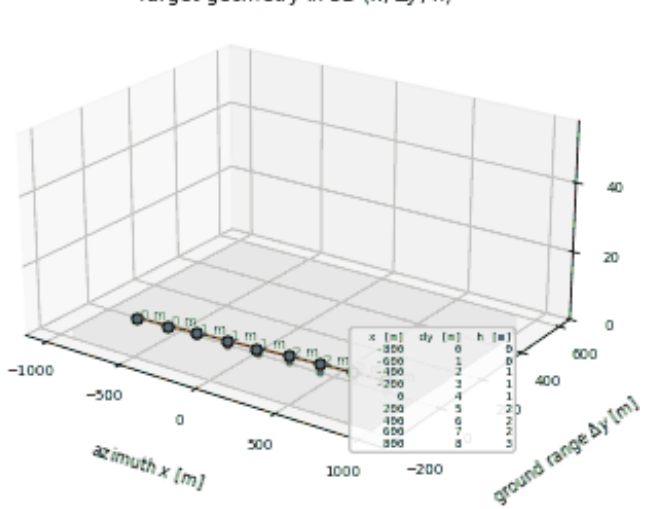
RA-SN-053 | SATA 1D | along-track ramp: N = 9, $\alpha = 0.1^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



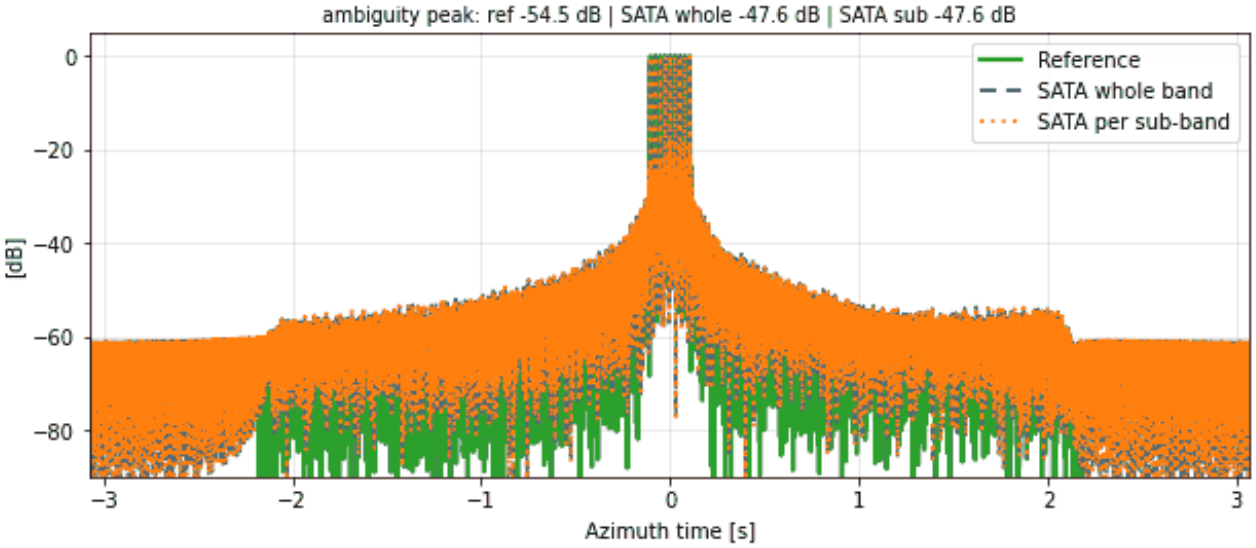



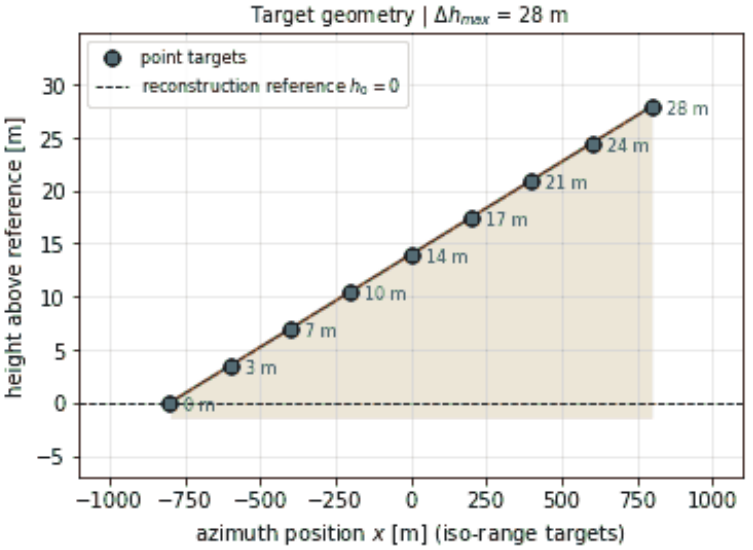


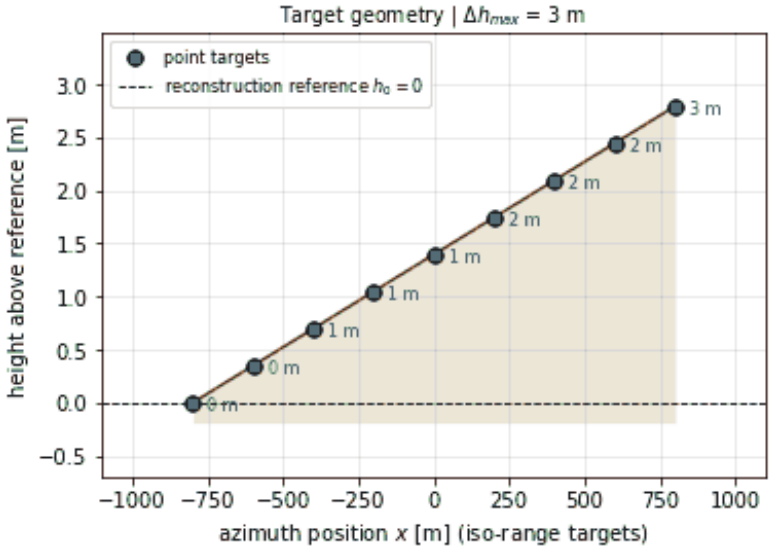





RA-SN-054 | SATA 1D | along-track ramp: N = 9, $\alpha = 1^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

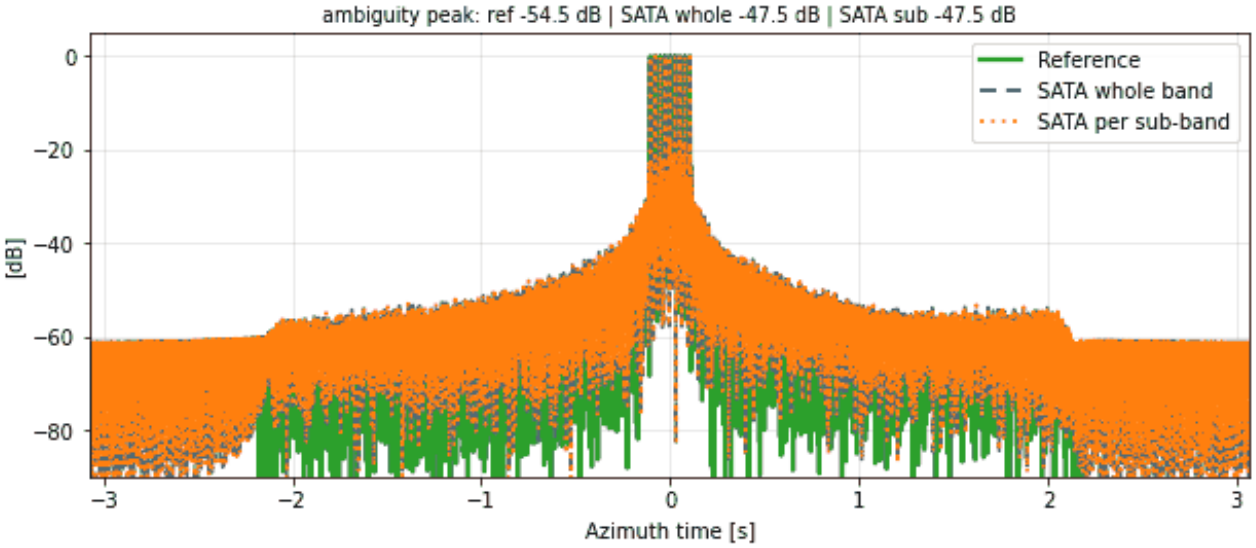


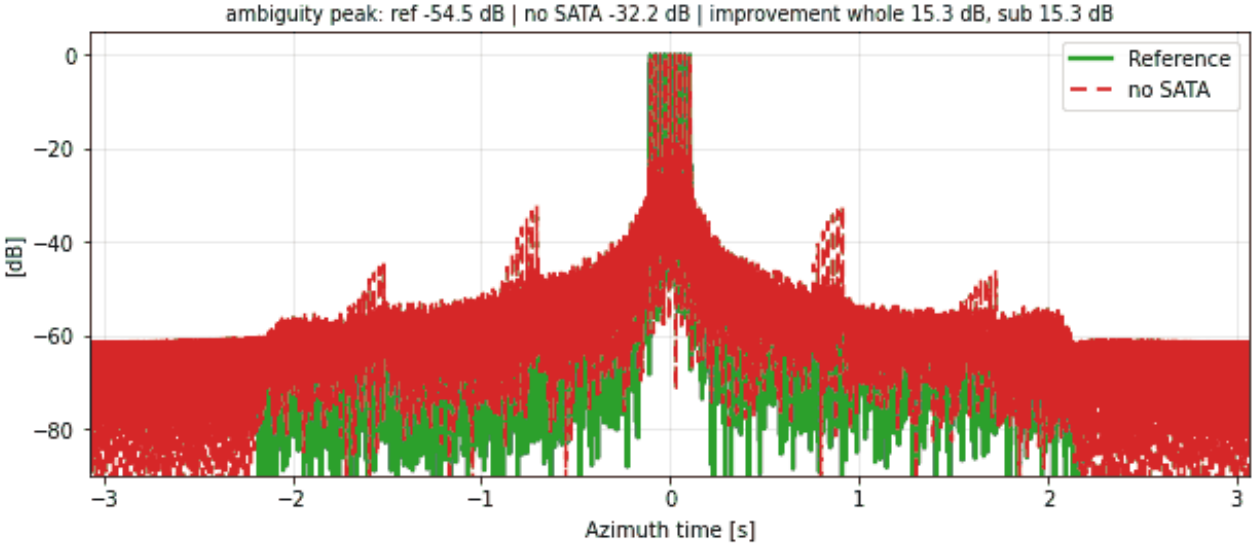



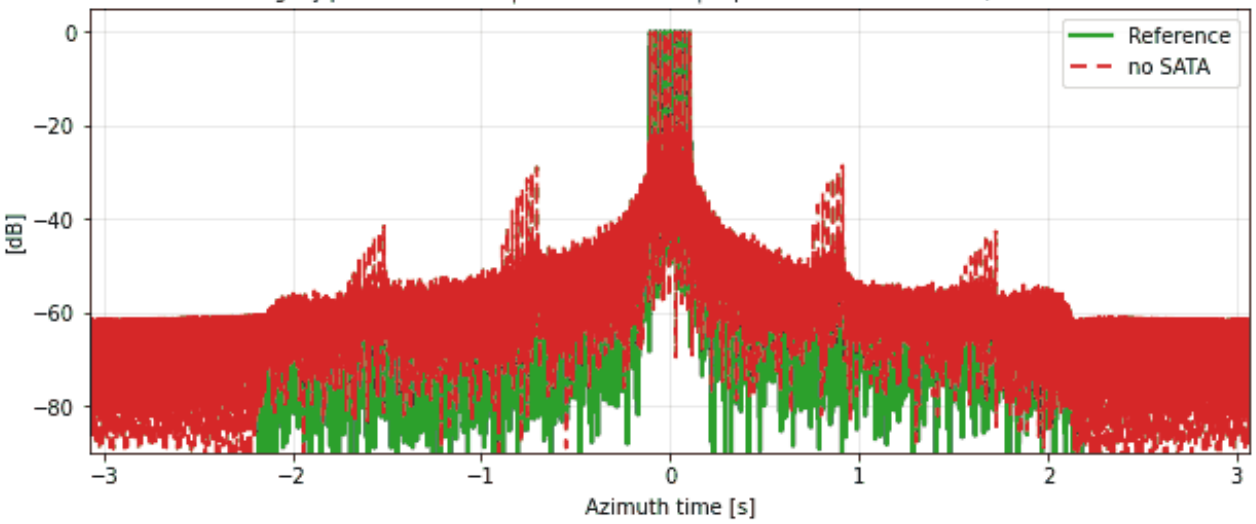


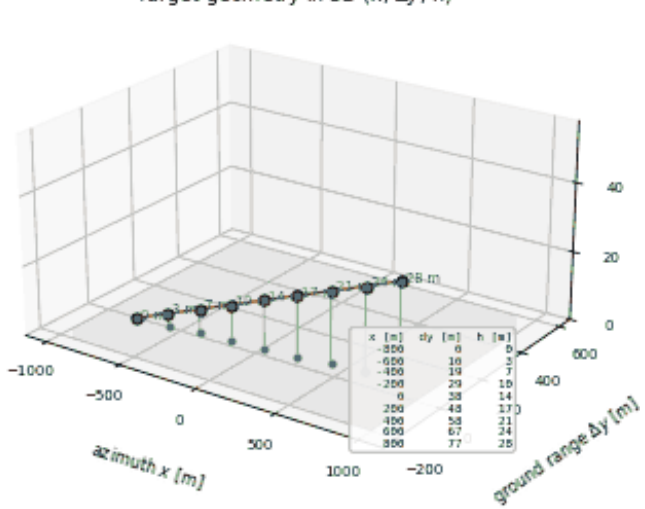
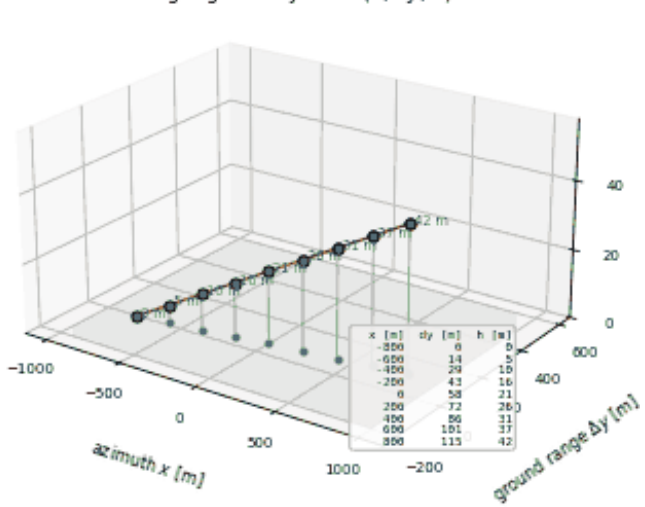



RA-SN-055 | SATA 1D | along-track ramp: N = 9, $\alpha = 1.5^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

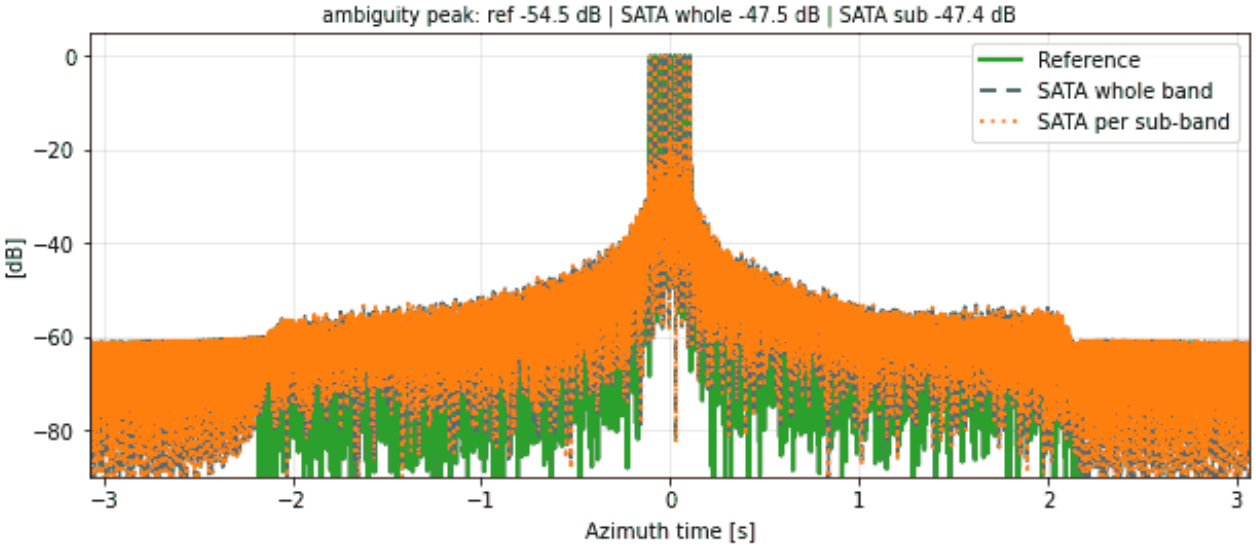


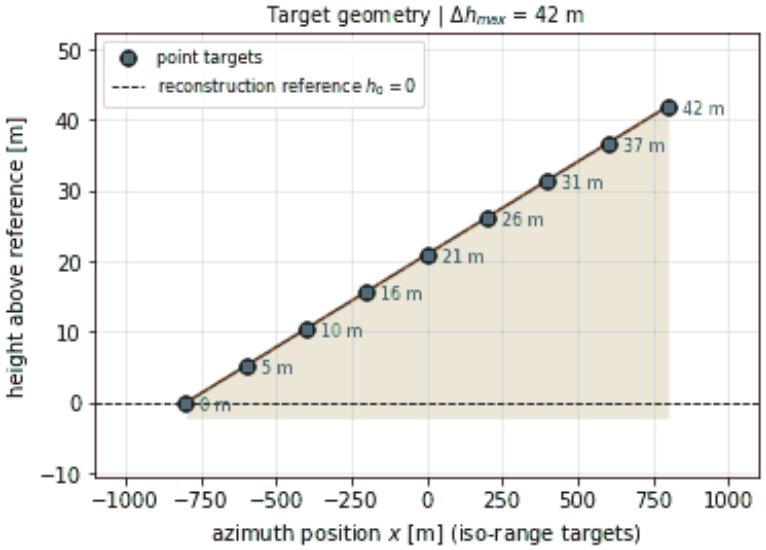



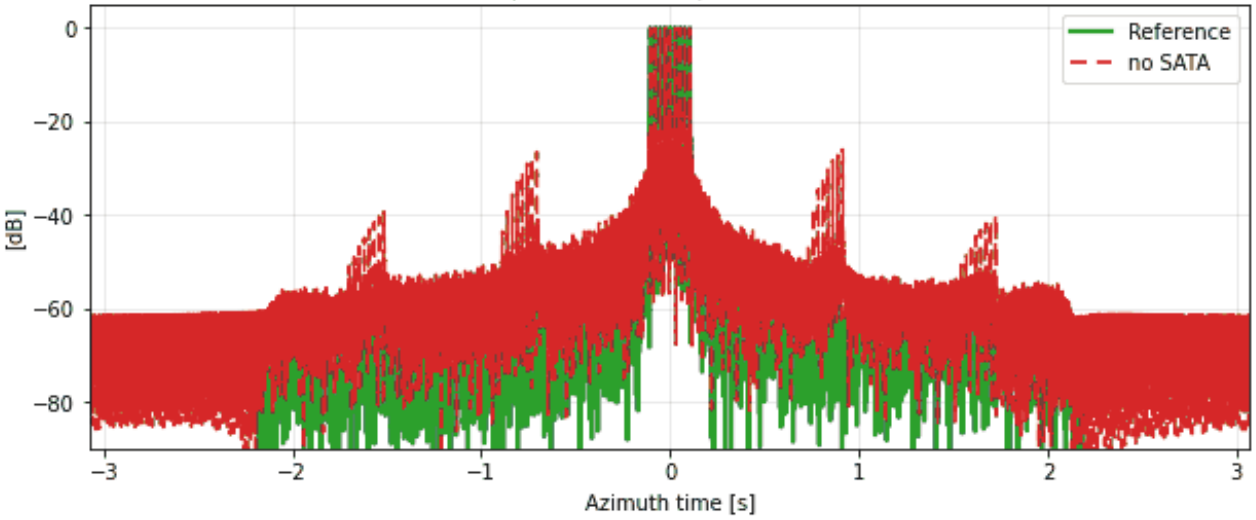



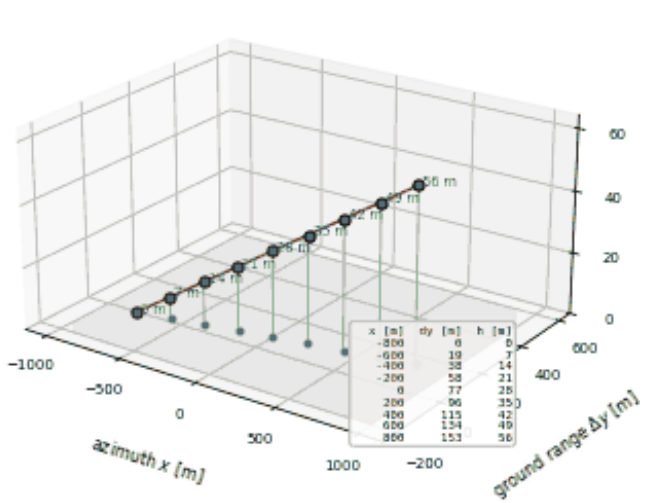



RA-SN-056 | SATA 1D | along-track ramp: N = 9, $\alpha = 2^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

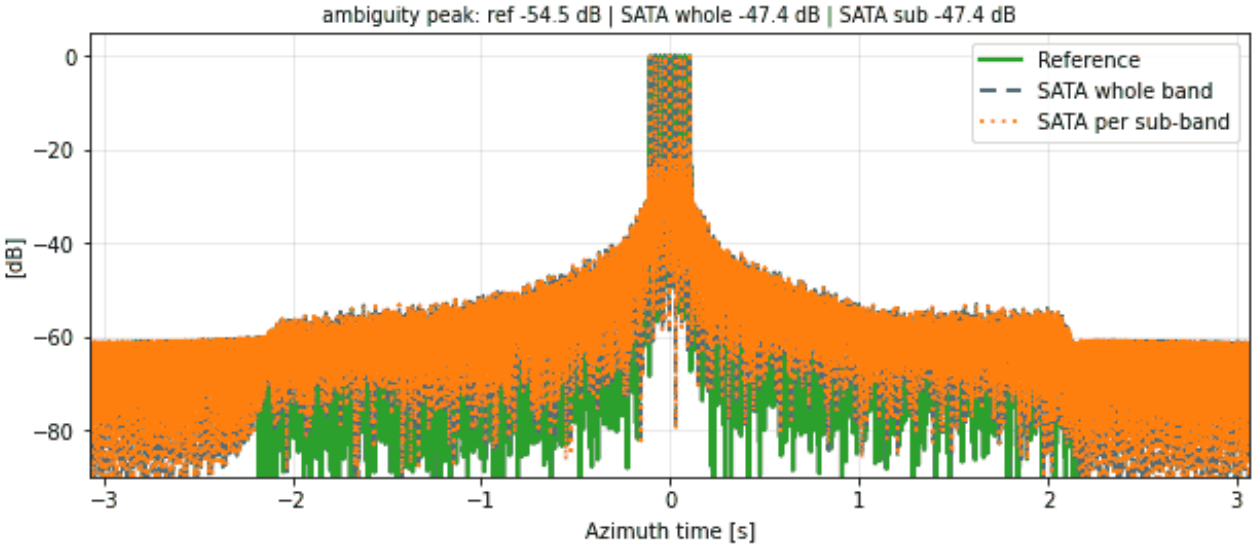


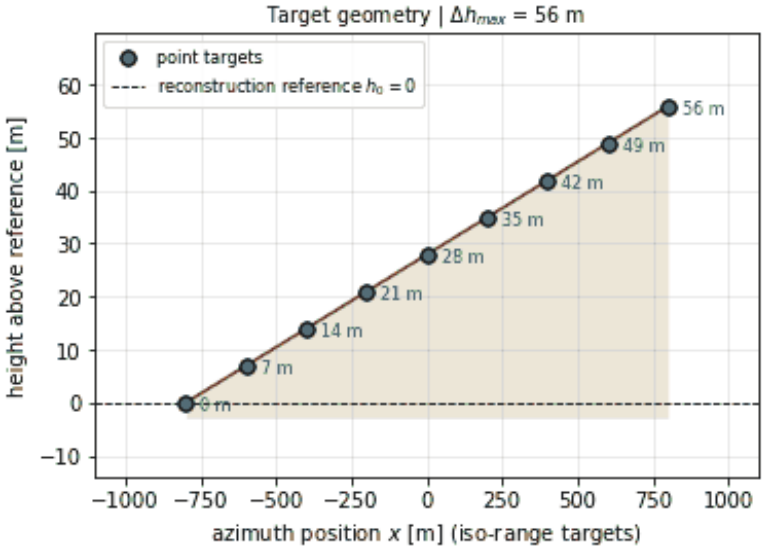



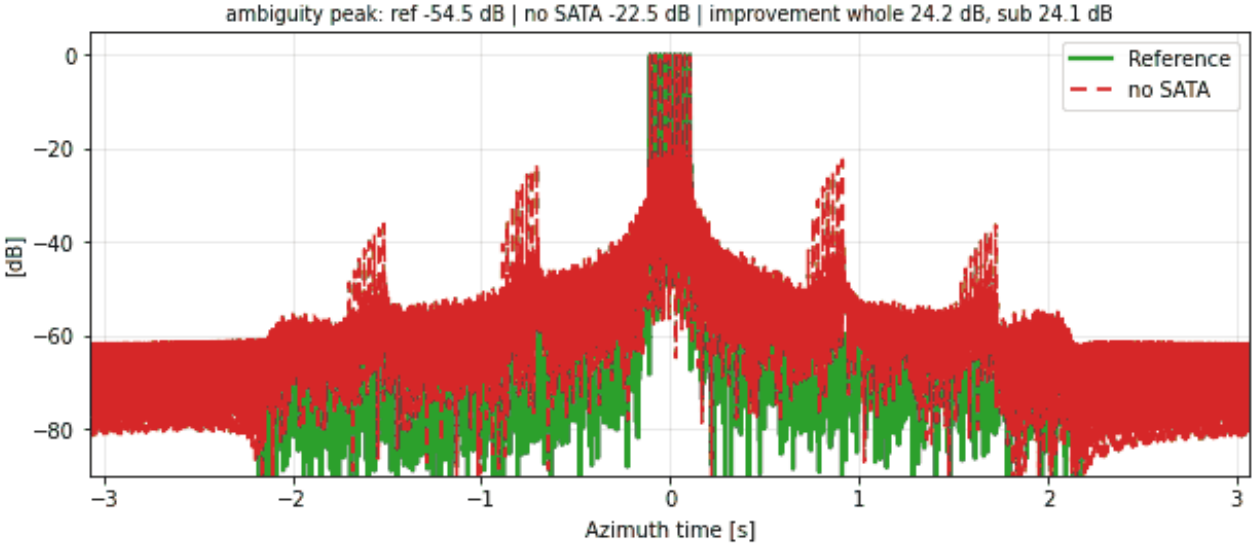



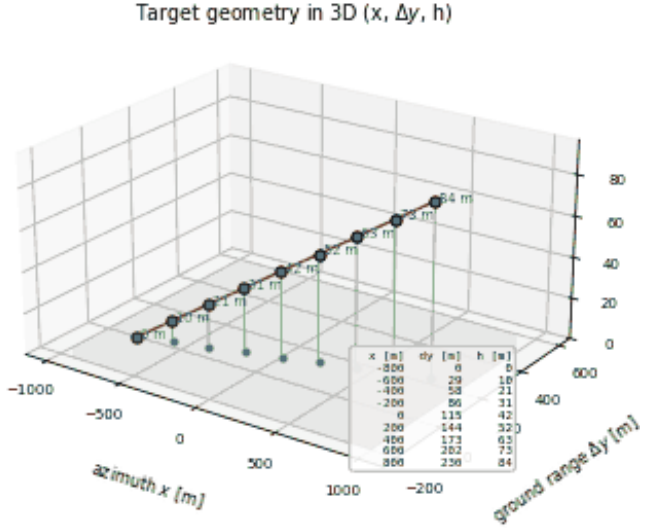



RA-SN-057 | SATA 1D | along-track ramp: N = 9, $\alpha = 3^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

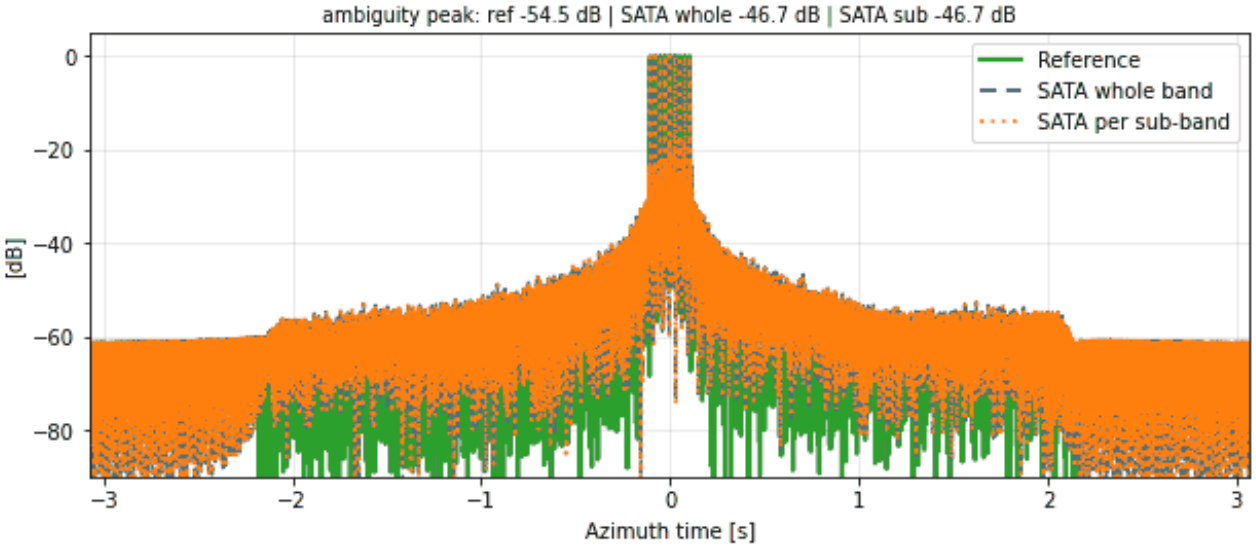


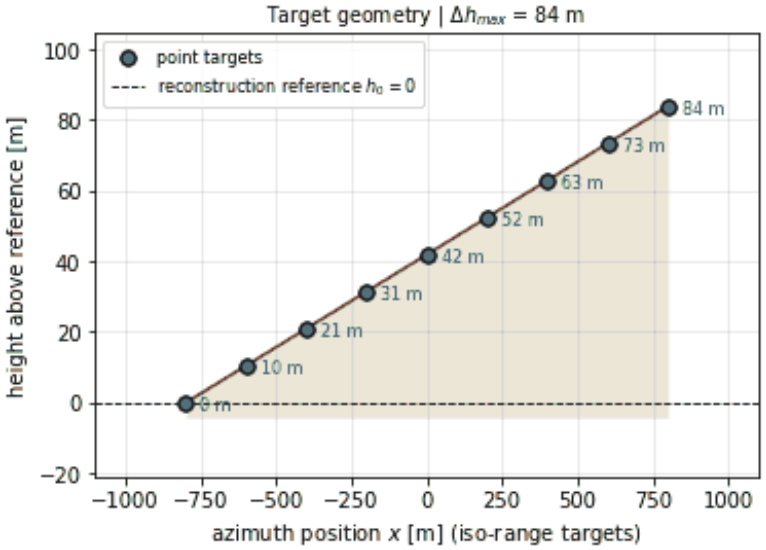



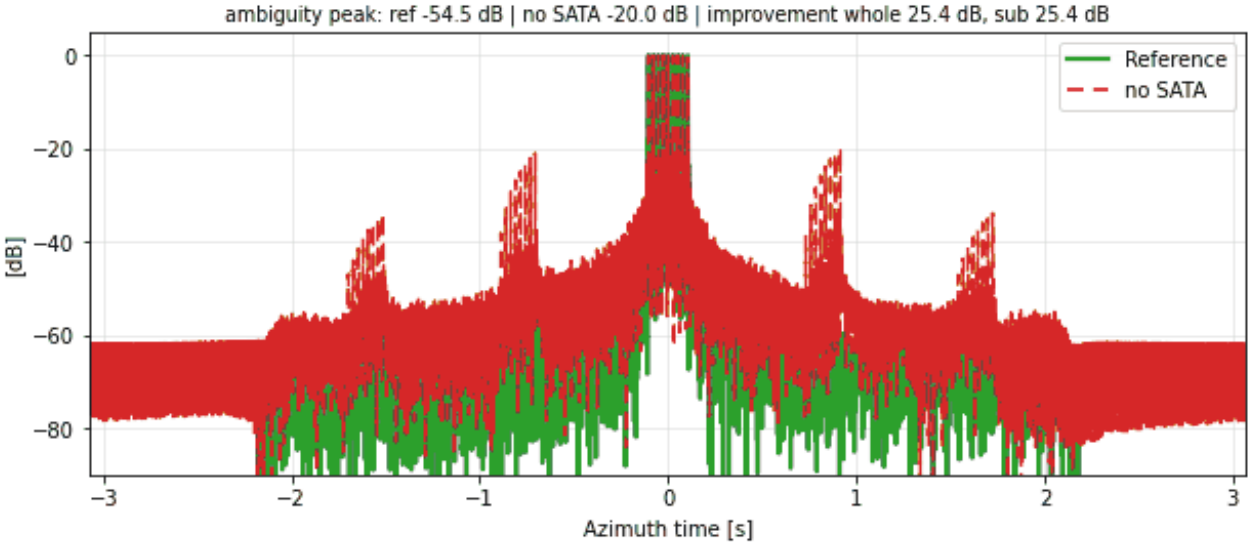



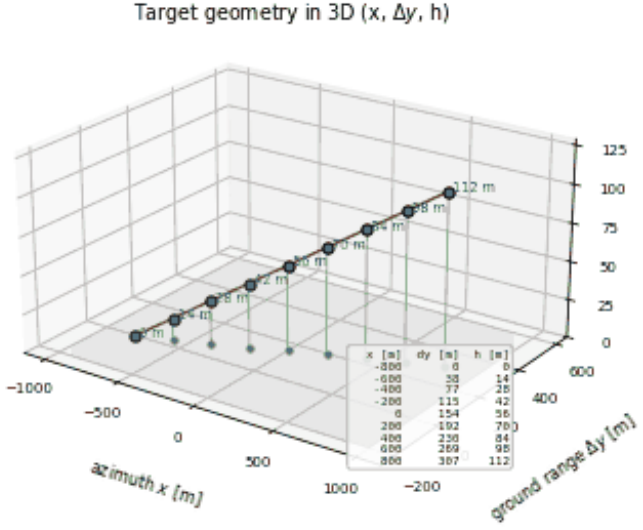



RA-SN-058 | SATA 1D | along-track ramp: N = 9, $\alpha = 4^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

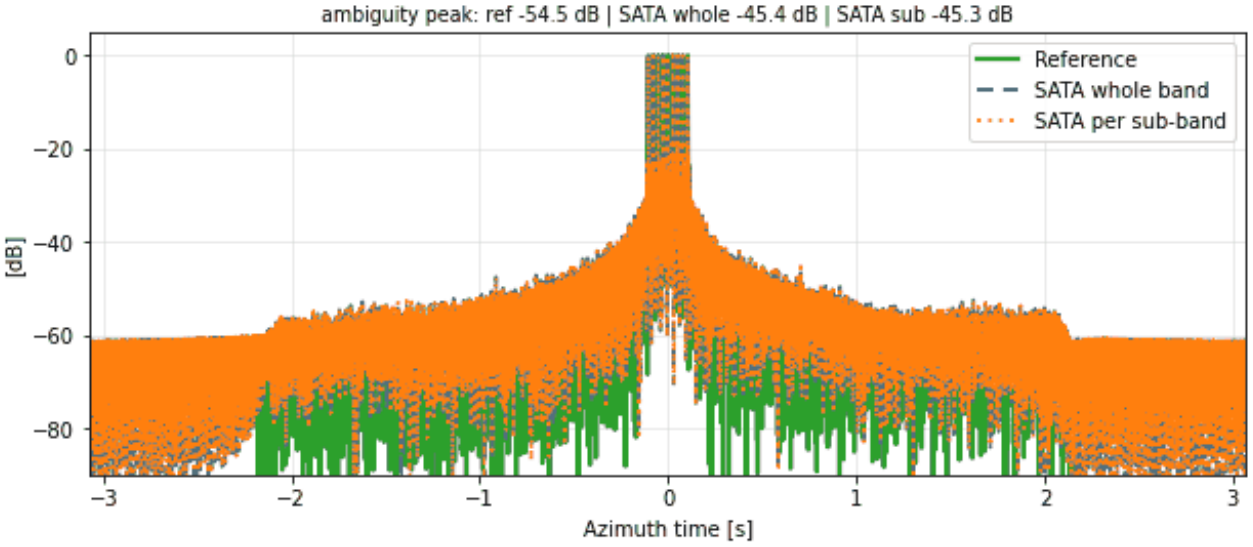


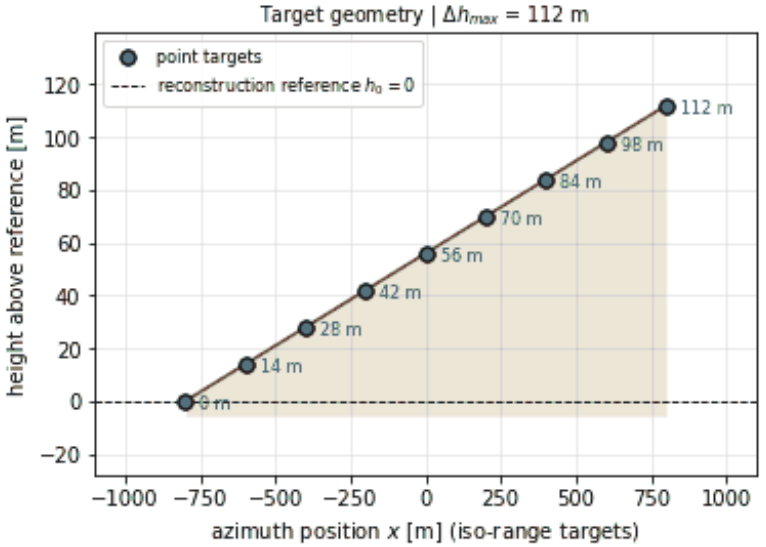



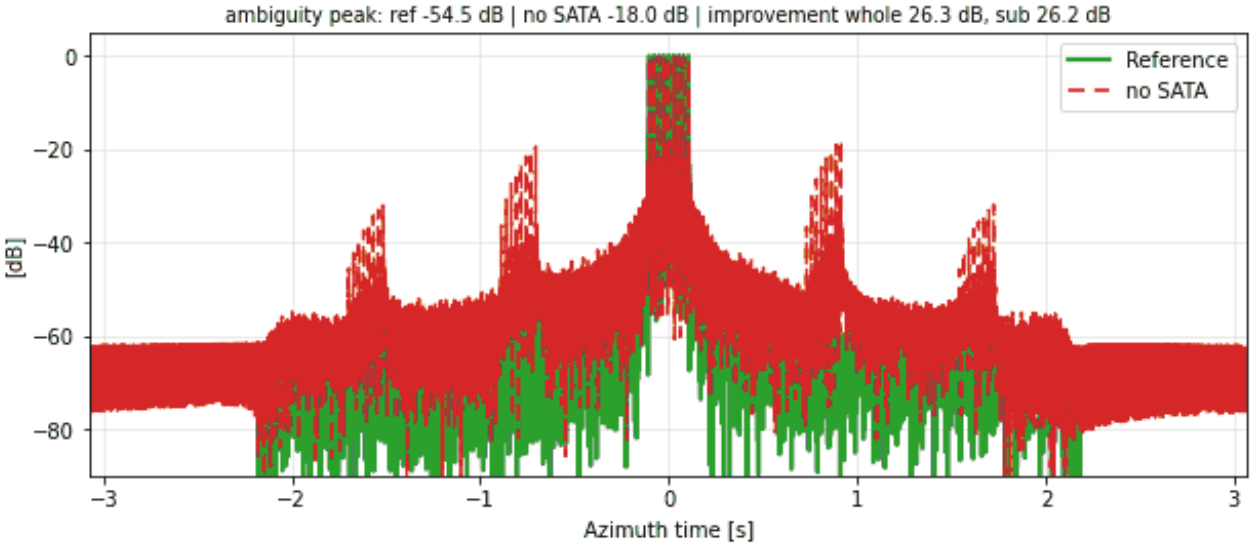



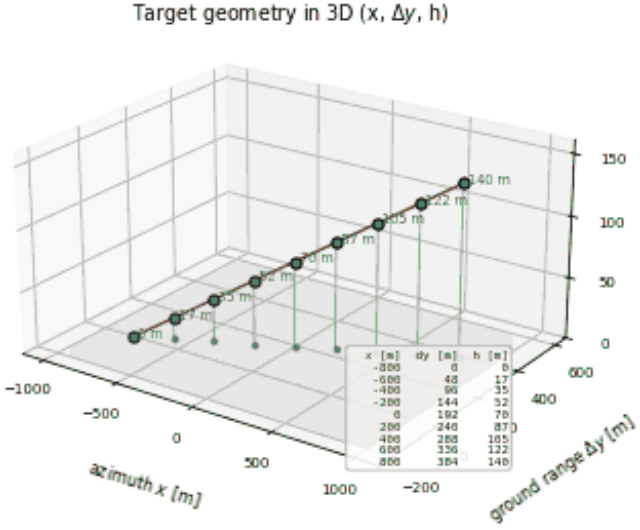



RA-SN-059 | SATA 1D | along-track ramp: N = 9, $\alpha = 5^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

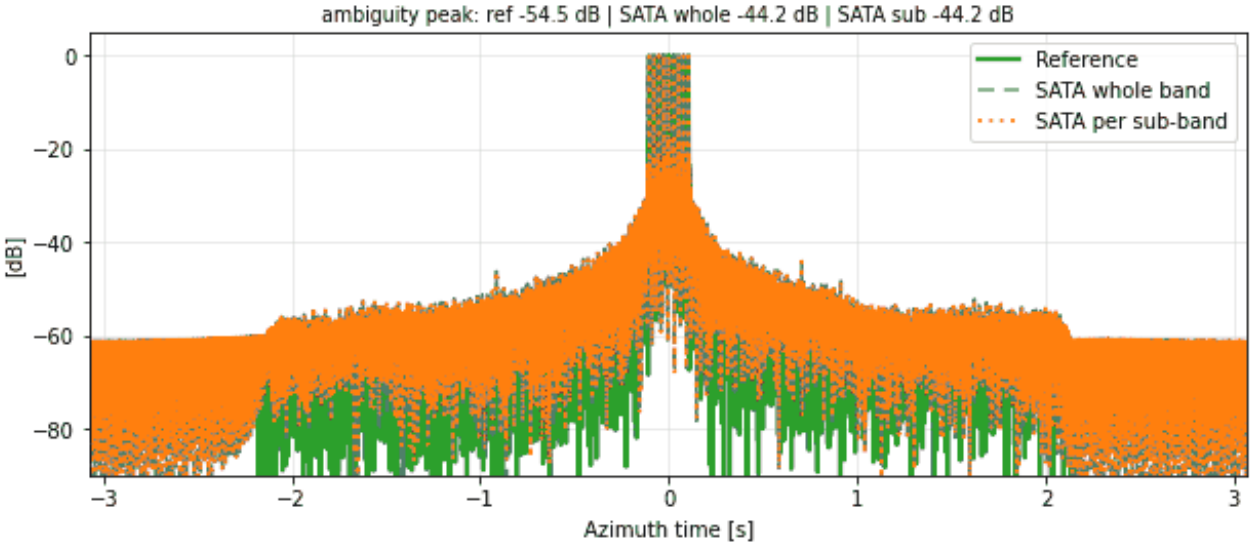

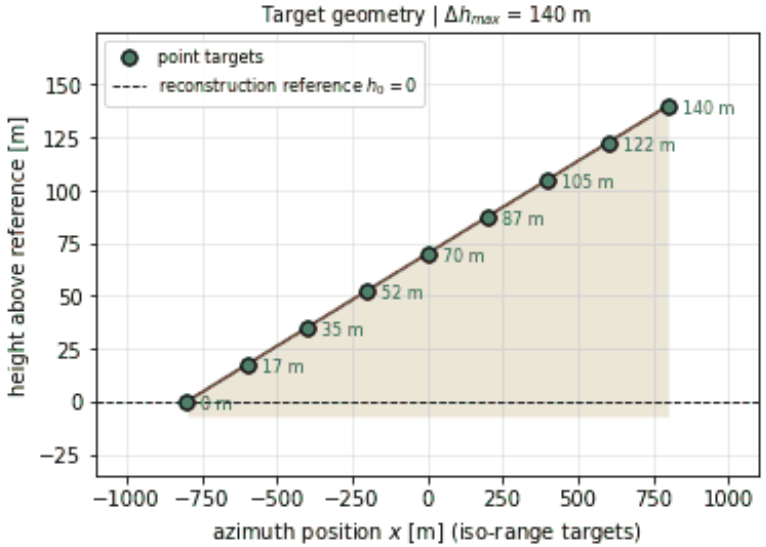



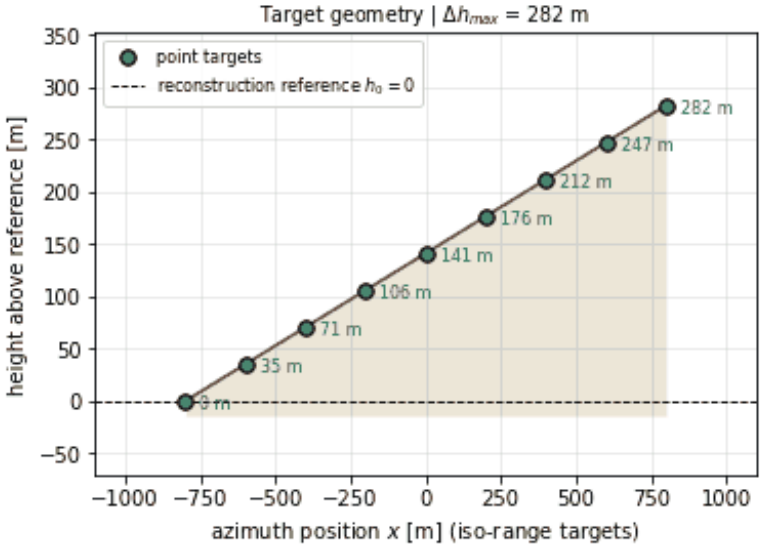



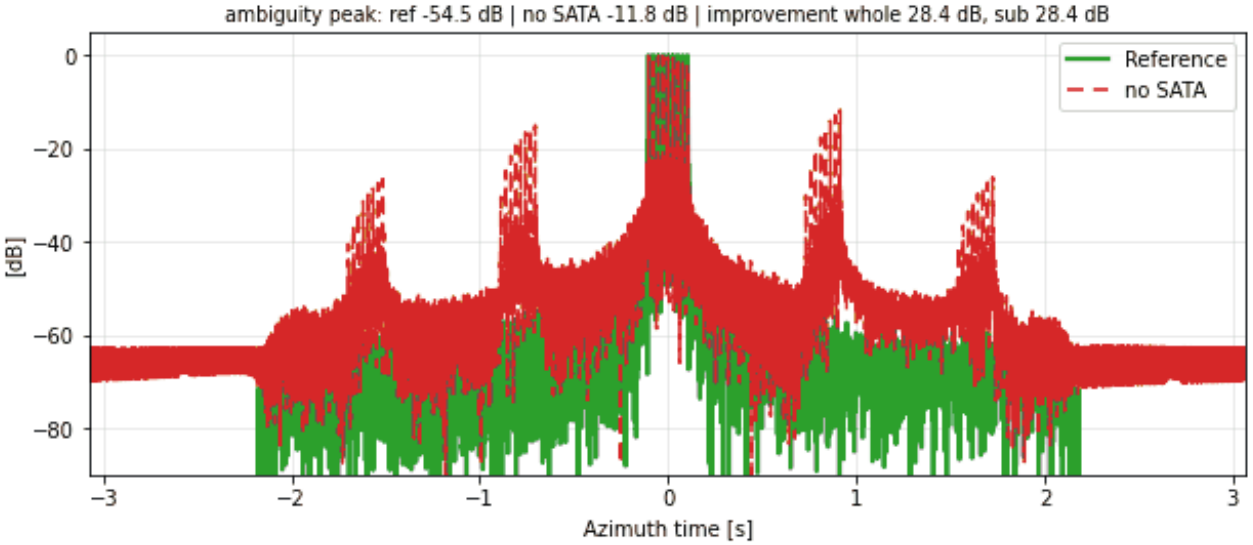

160


RA-SN-060 | SATA 1D | along-track ramp: N = 9, $\alpha = 10°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

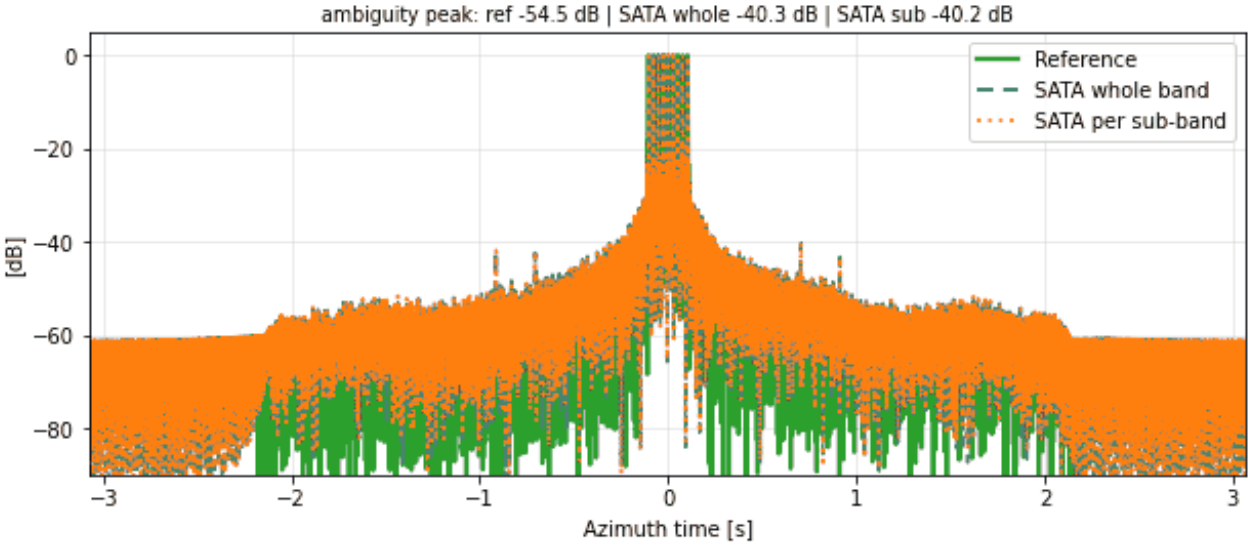






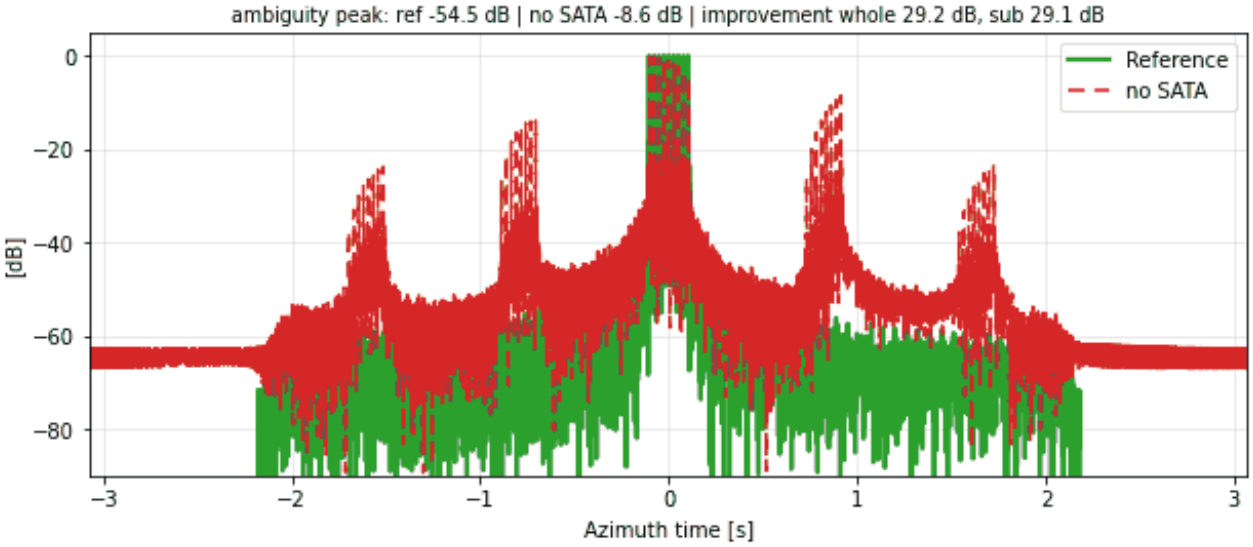


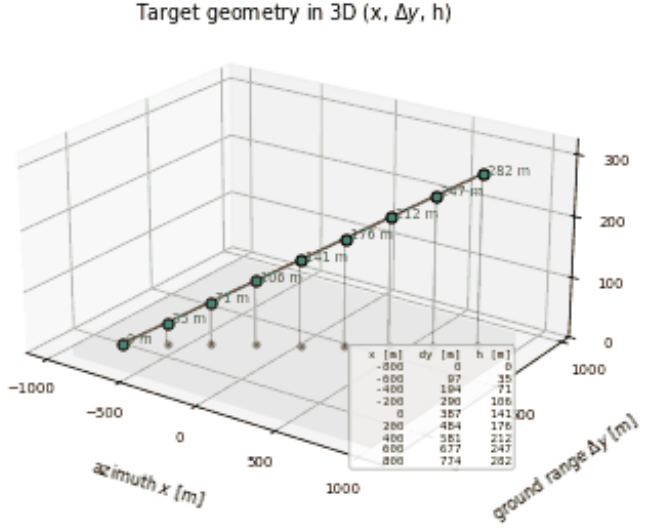
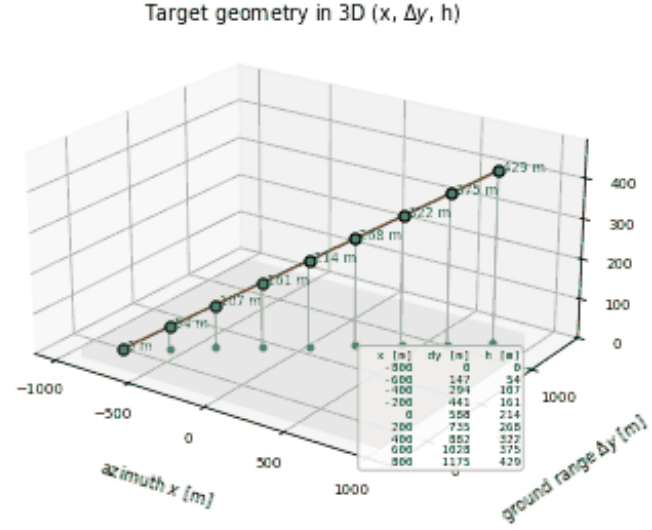



RA-SN-061 | SATA 1D | along-track ramp: N = 9, $\alpha = 15^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

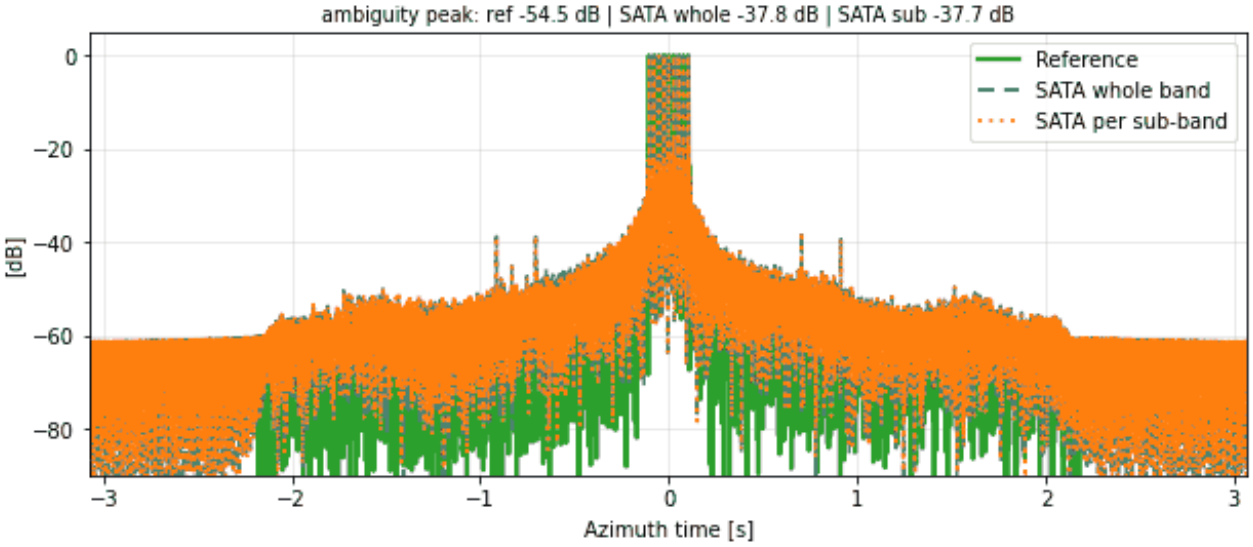

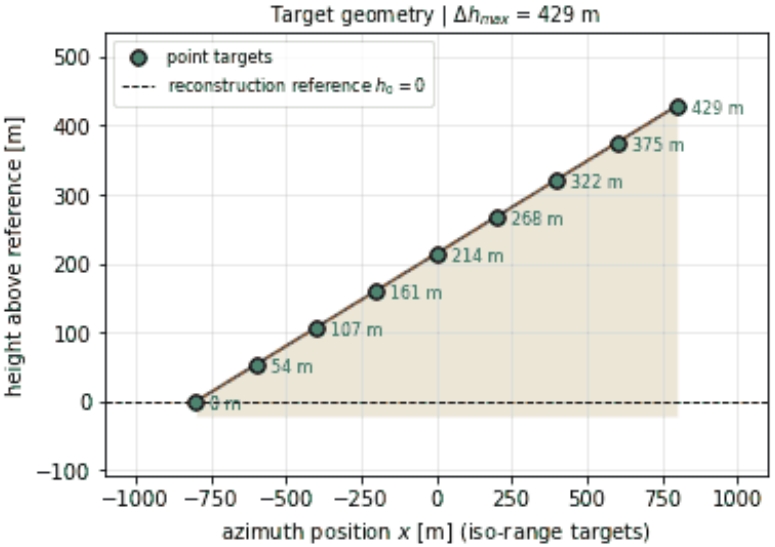



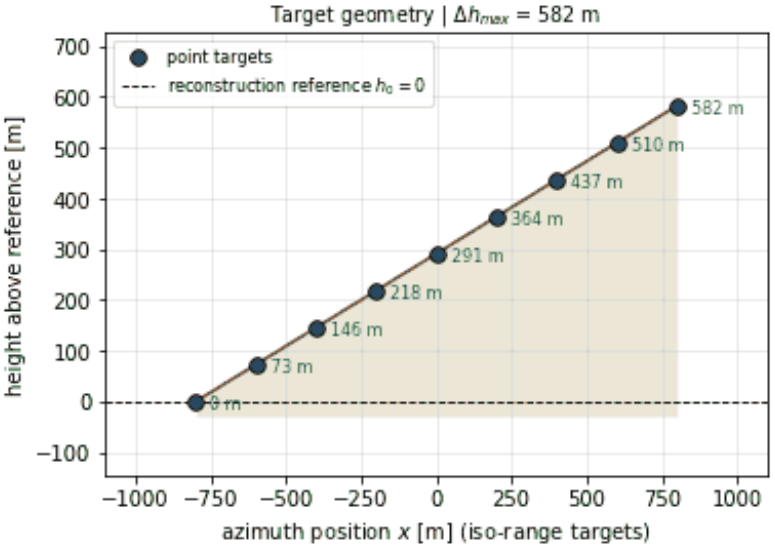



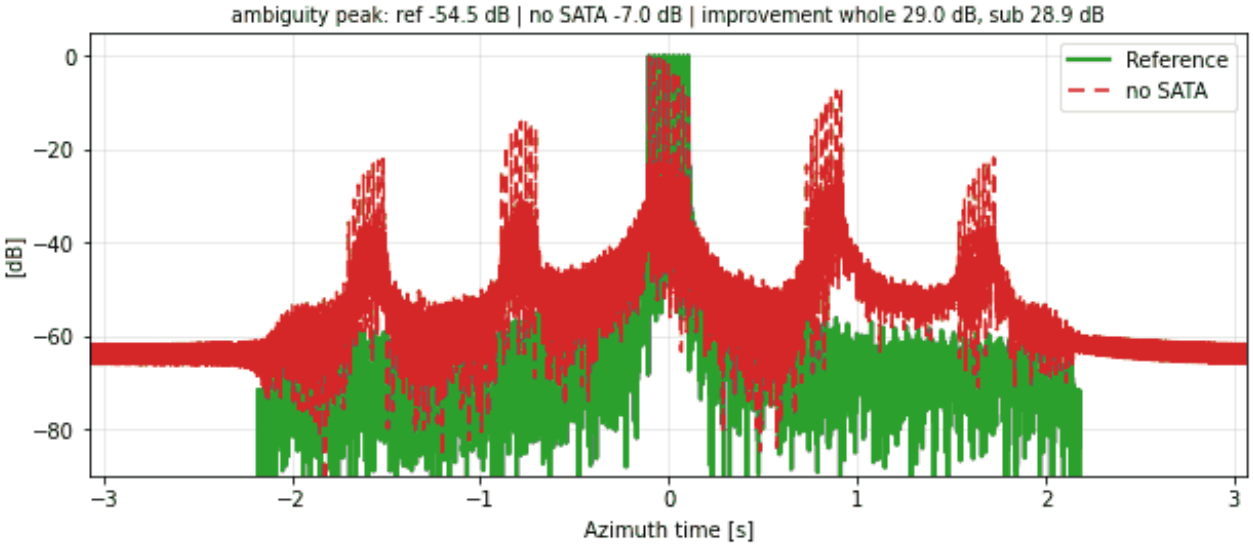



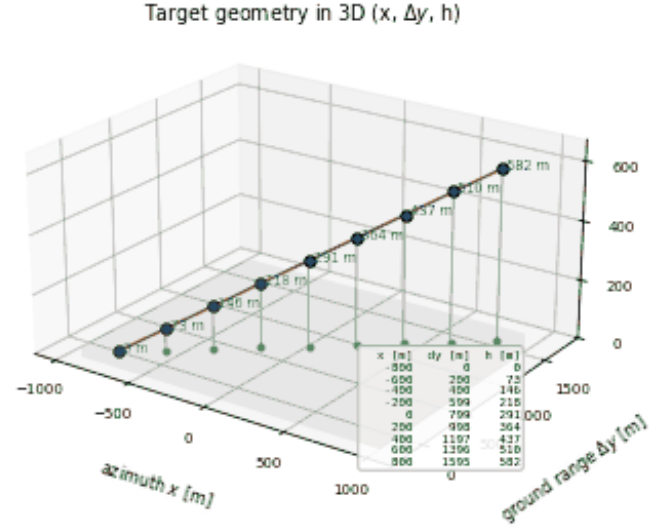
RA-SN-062 | SATA 1D | along-track ramp: N = 9, $\alpha = 20°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

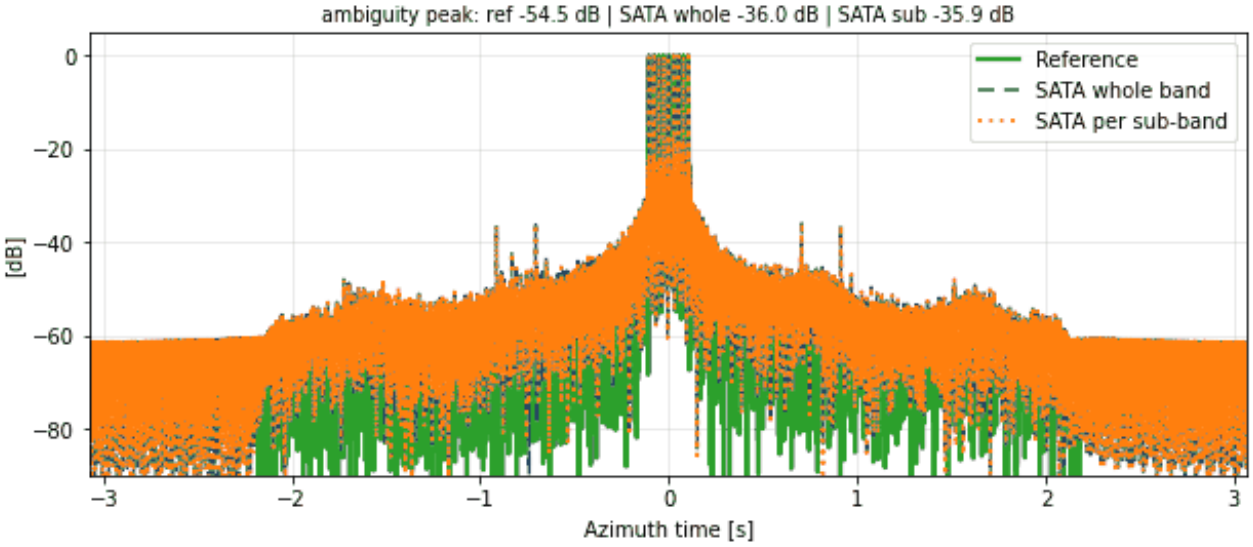






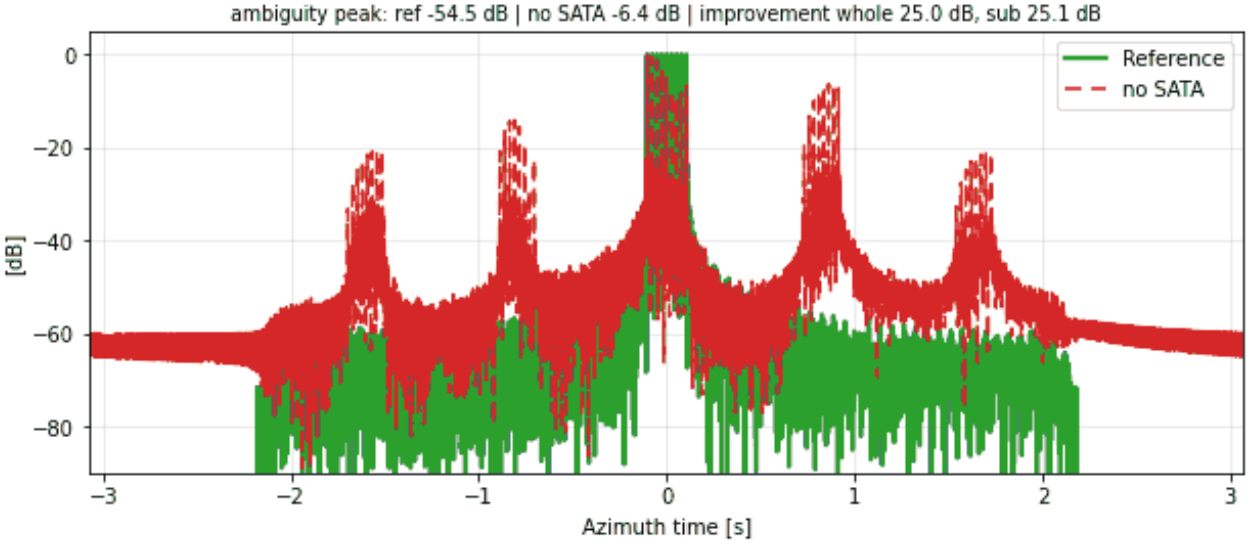



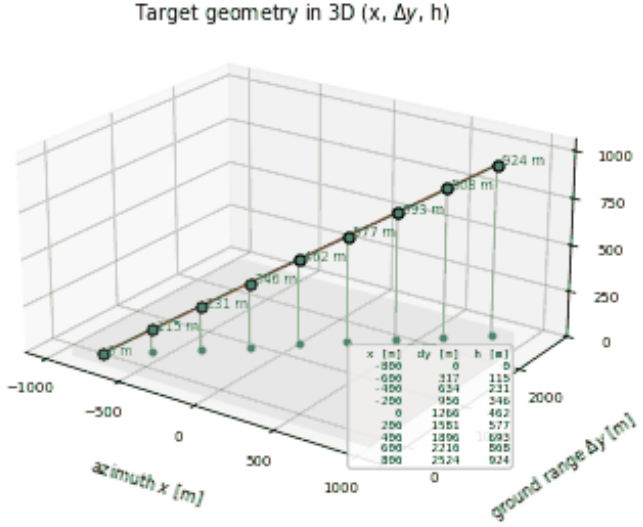



RA-SN-063 | SATA 1D | along-track ramp: N = 9, $\alpha = 30°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

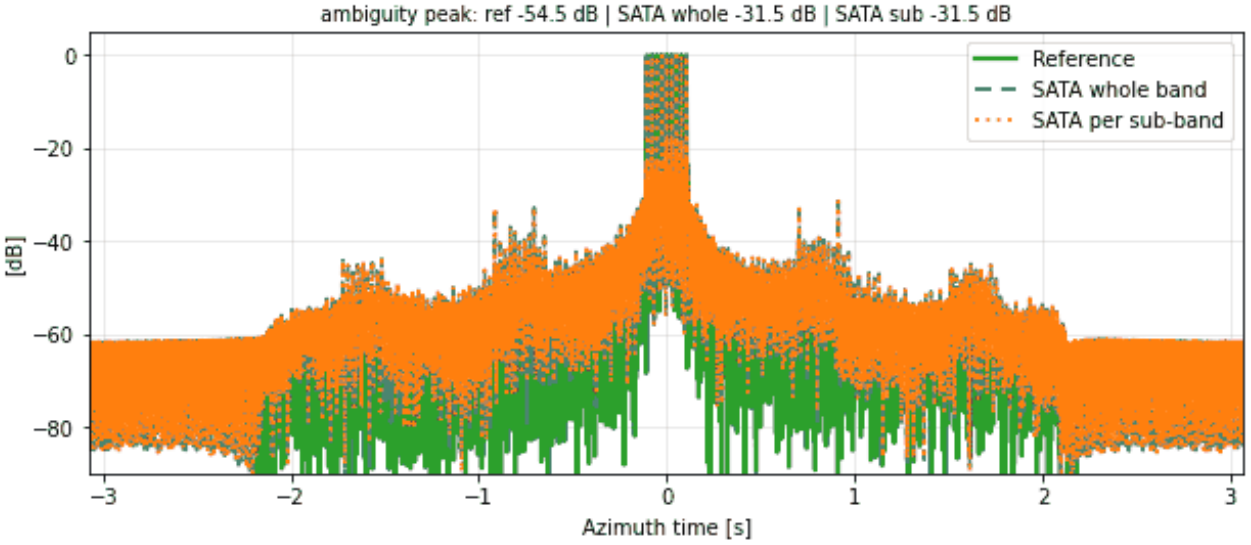


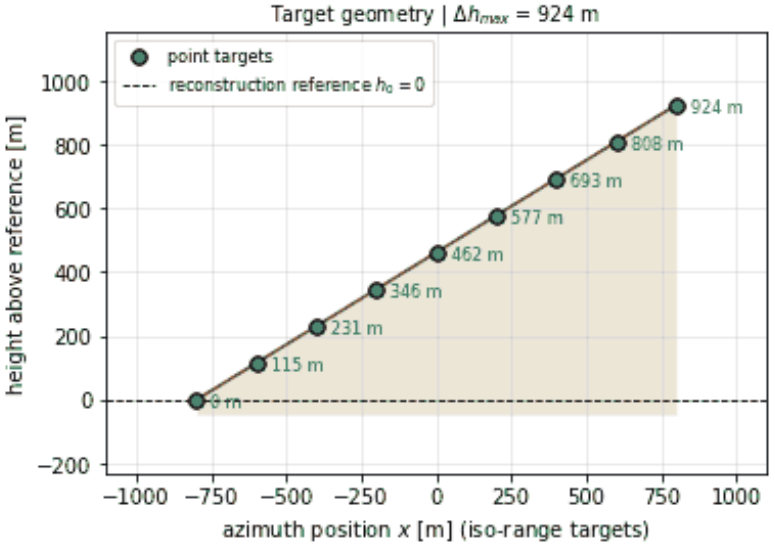



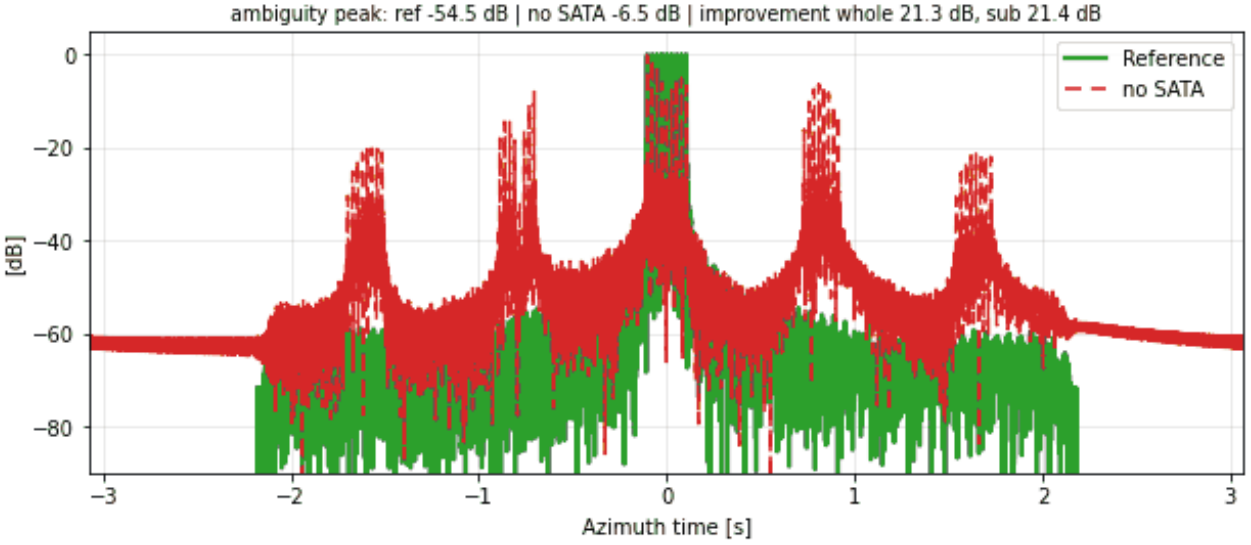



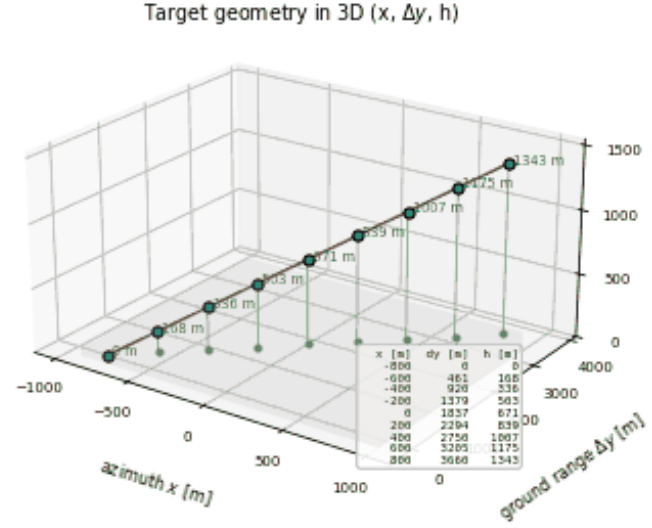



RA-SN-064 | SATA 1D | along-track ramp: N = 9, $\alpha = 40^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

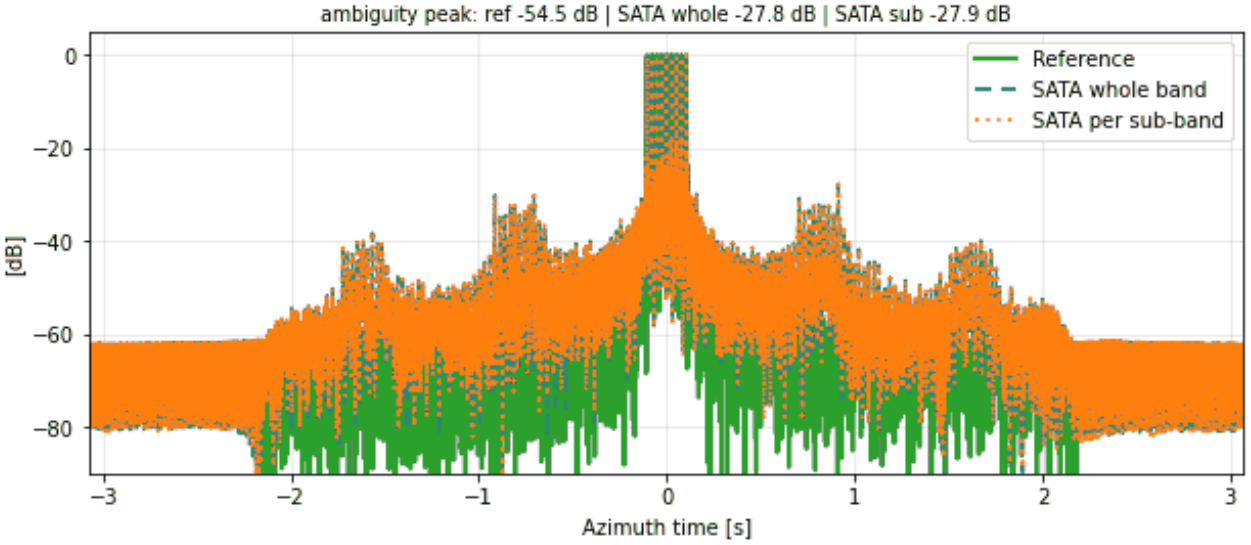


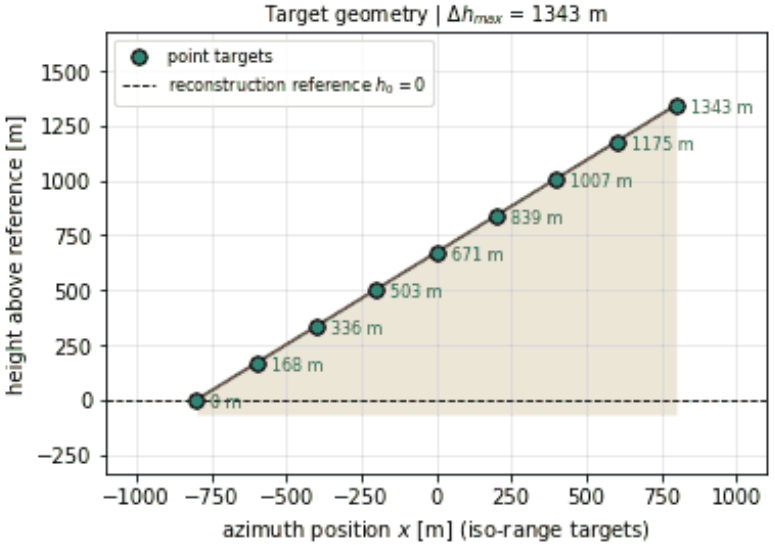



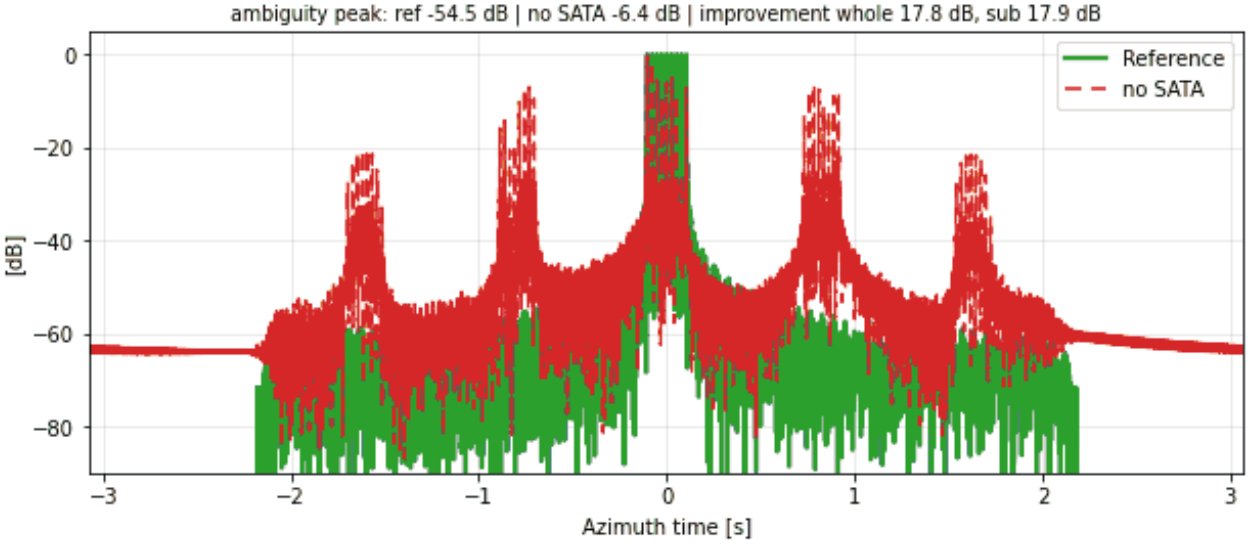



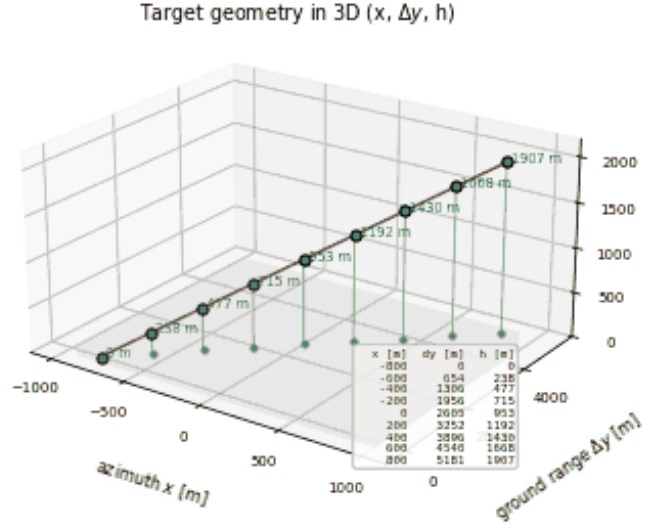



RA-SN-065 | SATA 1D | along-track ramp: N = 9, $\alpha = 50°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

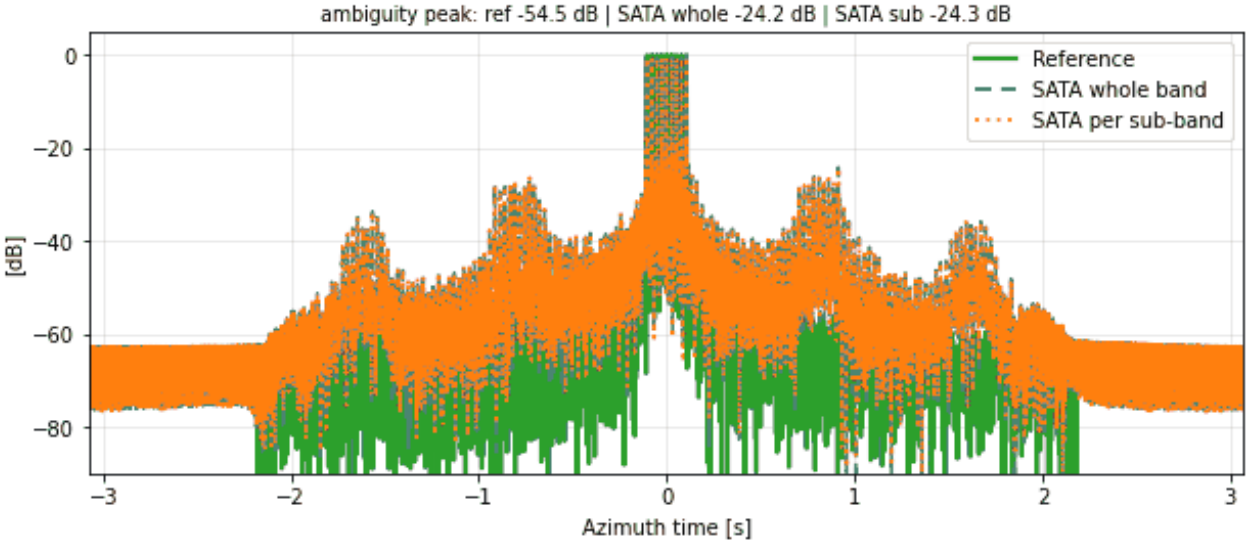

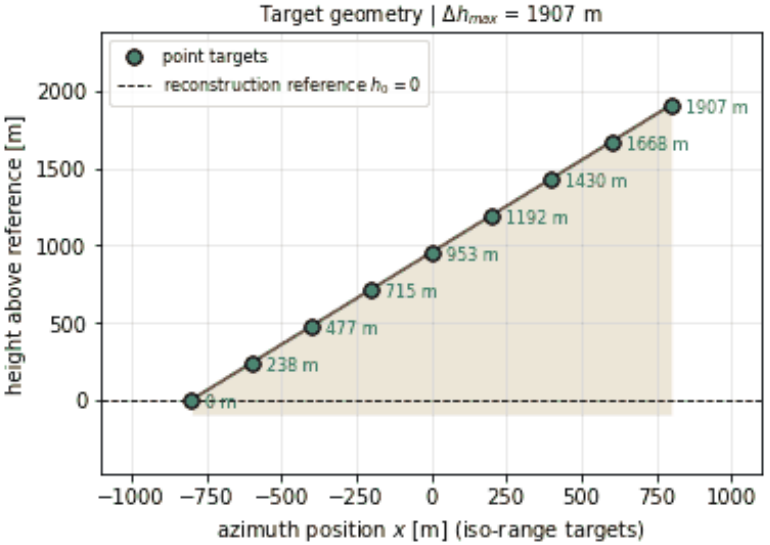



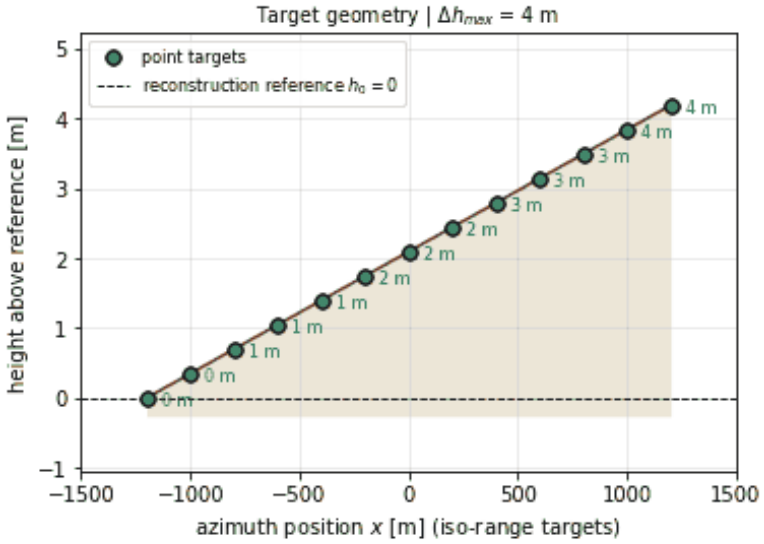



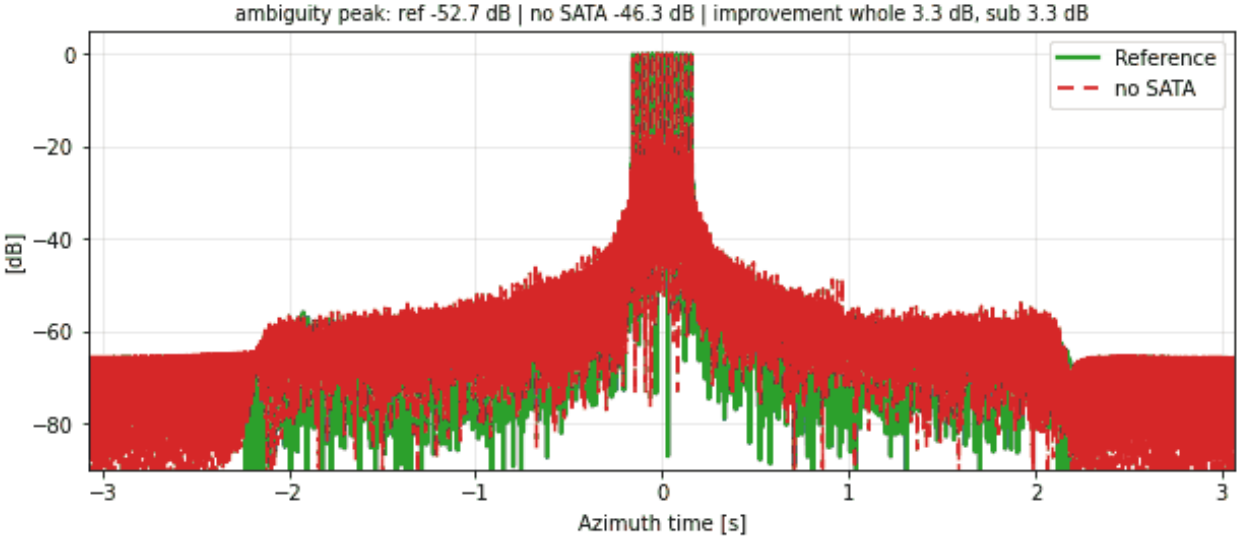



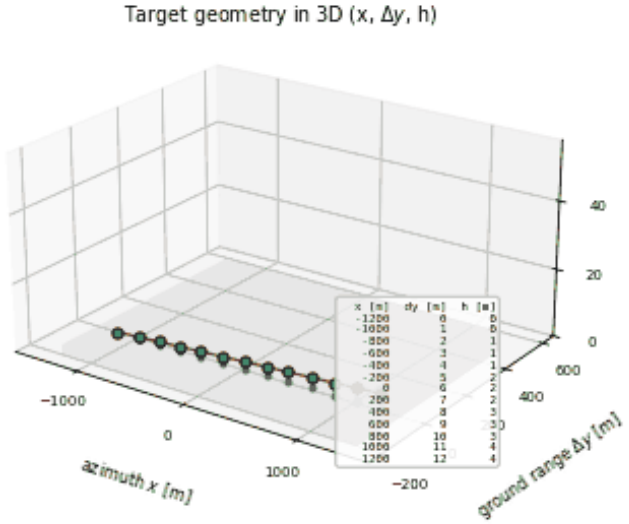
RA-SN-066 | SATA 1D | along-track ramp: N = 13, $\alpha = 0.1^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

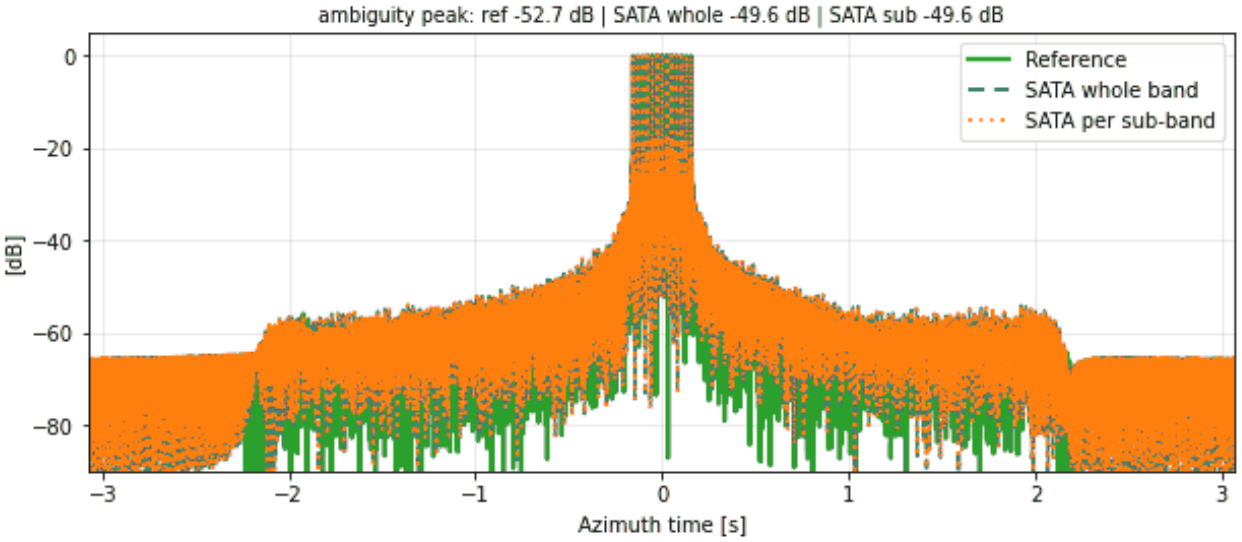






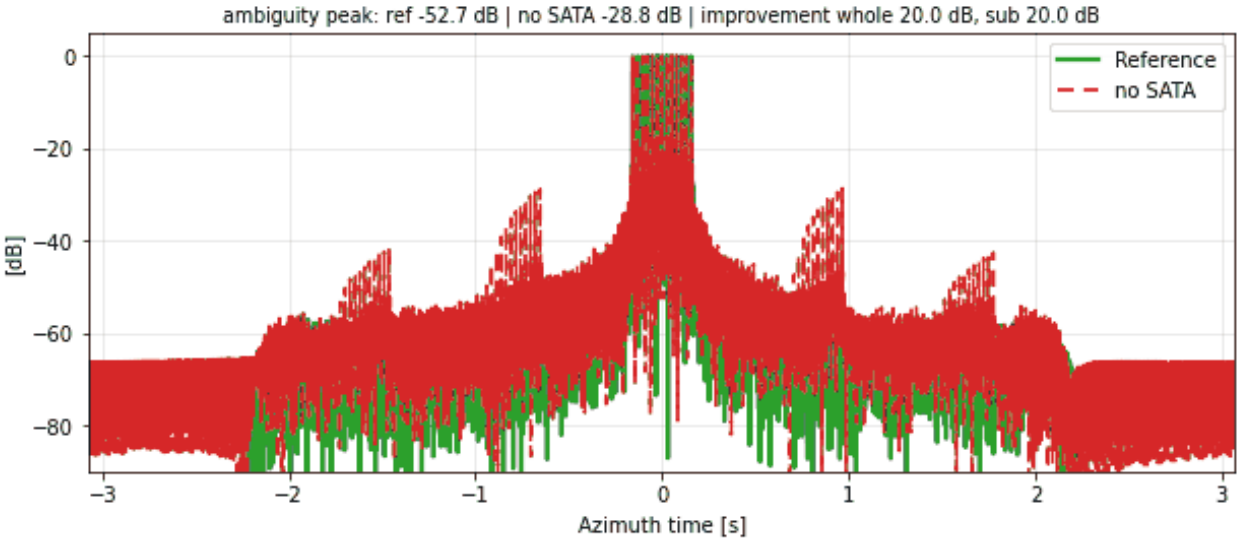



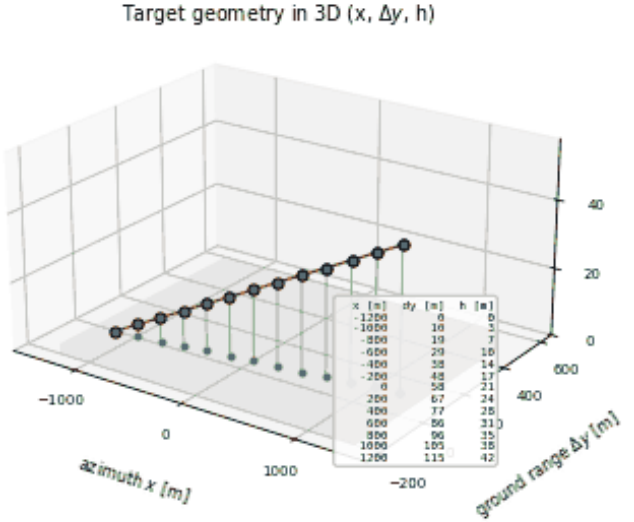



RA-SN-067 | SATA 1D | along-track ramp: N = 13, $\alpha = 1^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

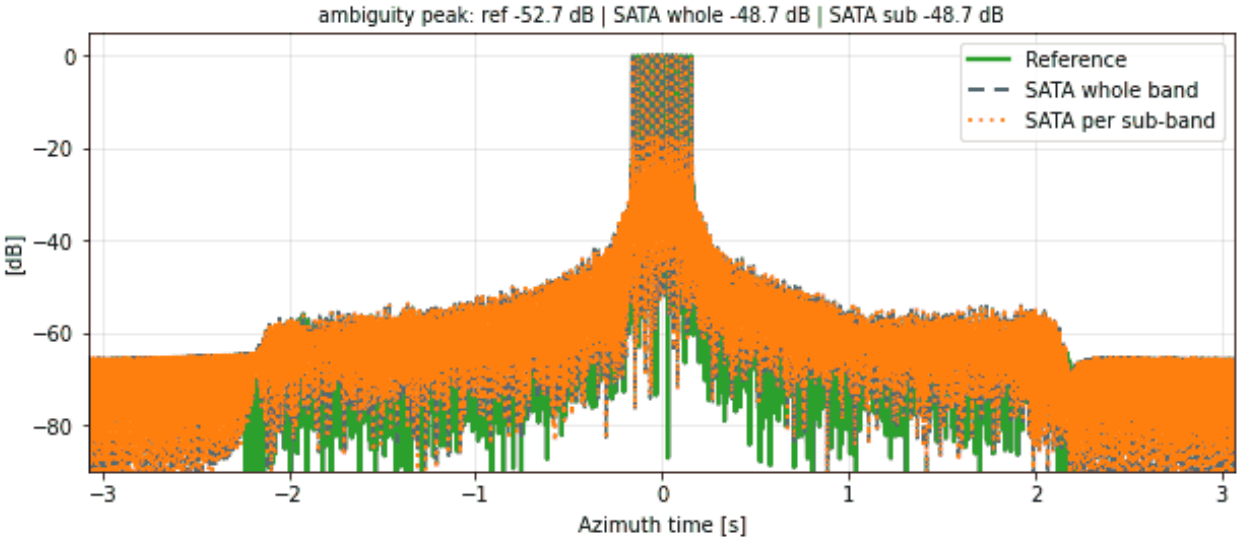


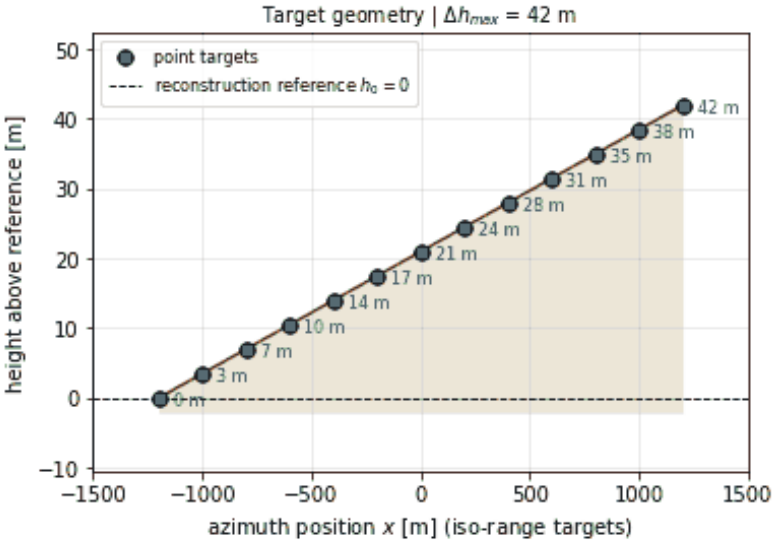



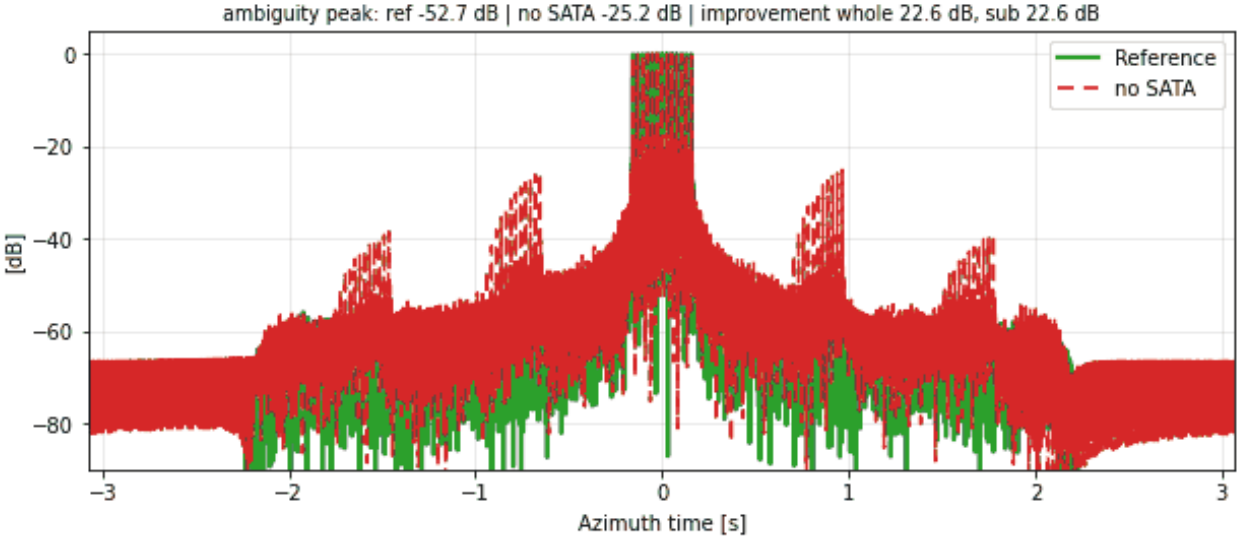



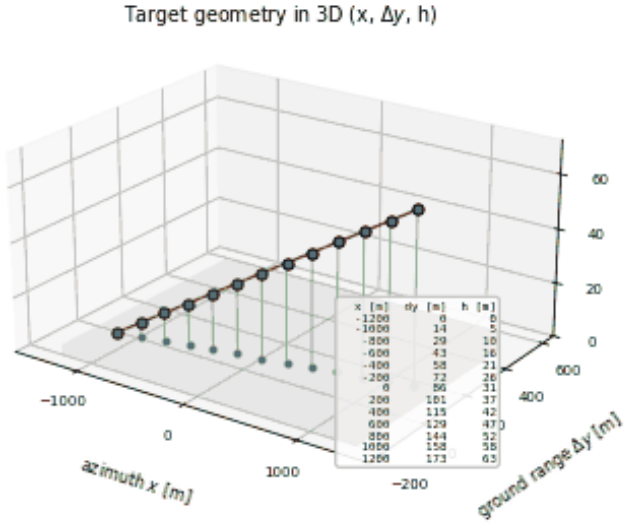



RA-SN-068 | SATA 1D | along-track ramp: N = 13, $\alpha = 1.5^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

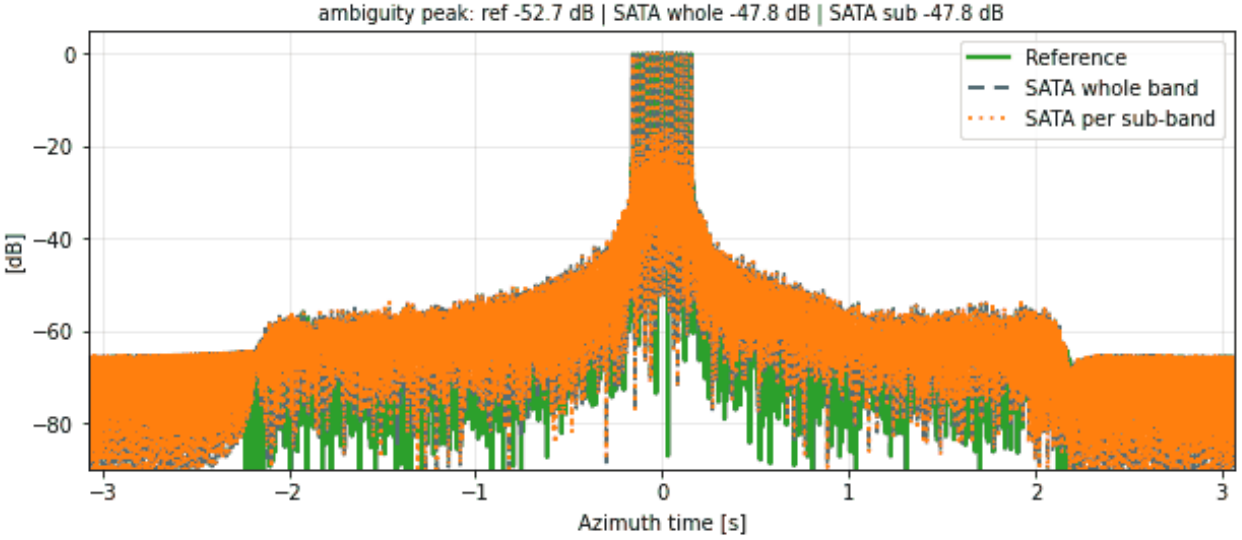


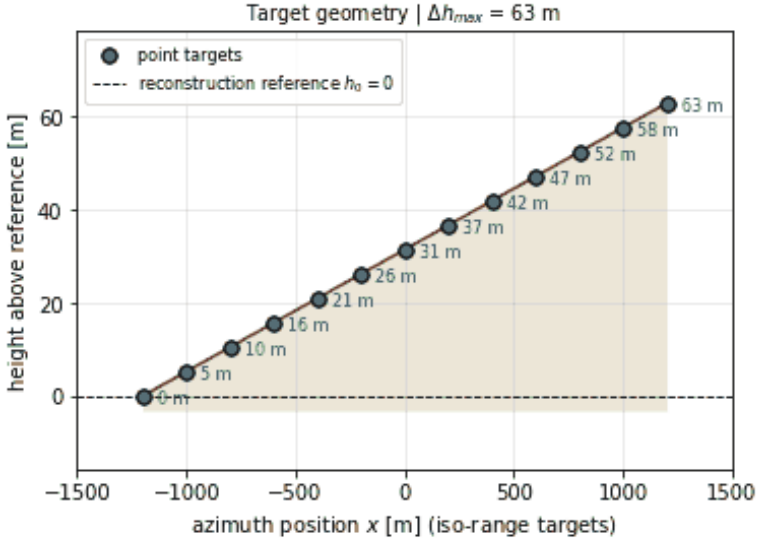



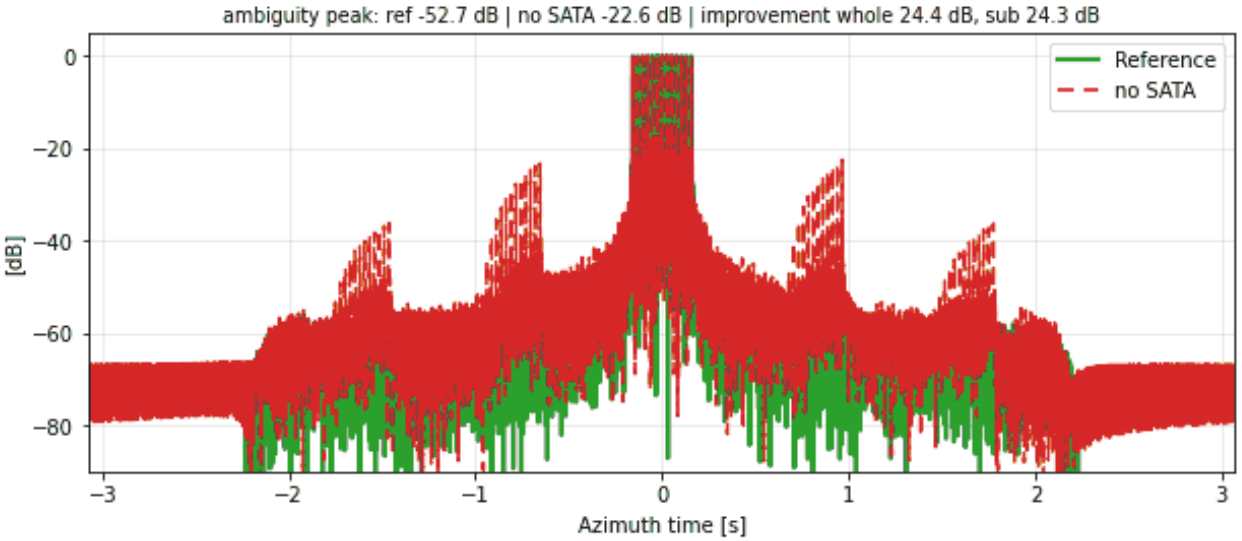



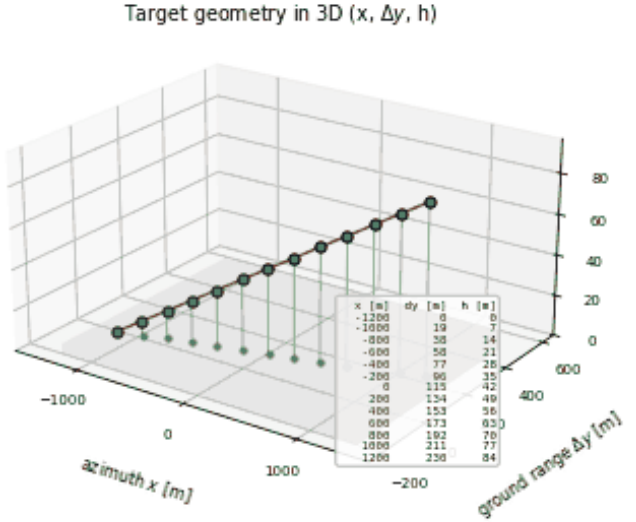



RA-SN-069 | SATA 1D | along-track ramp: N = 13, $\alpha = 2^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

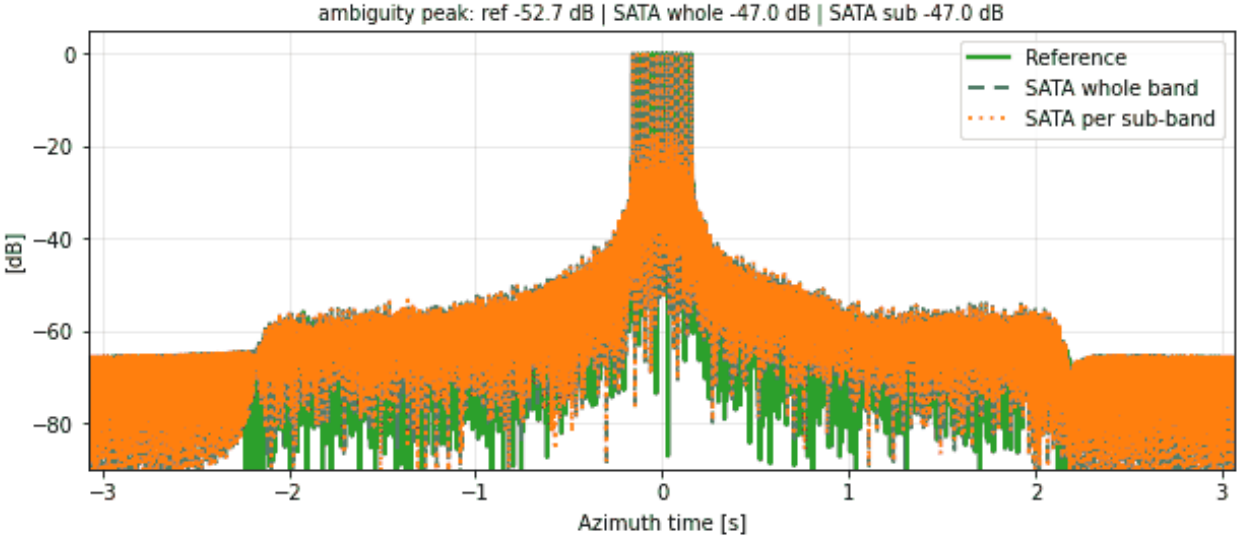


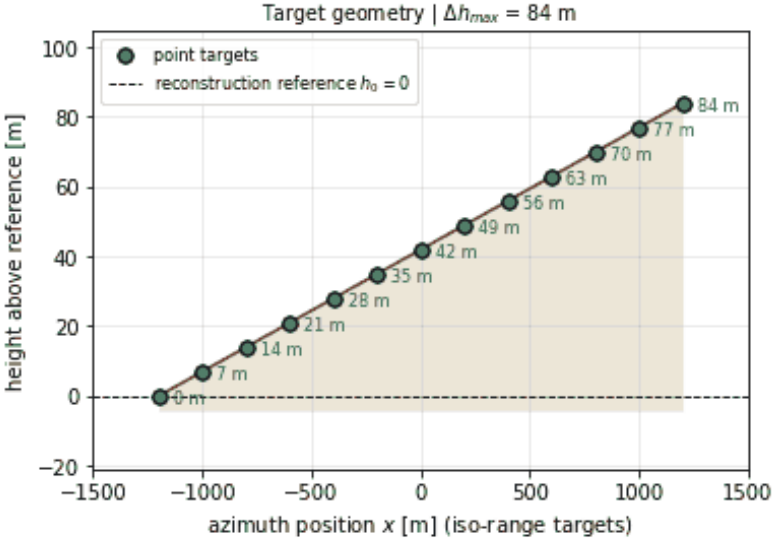



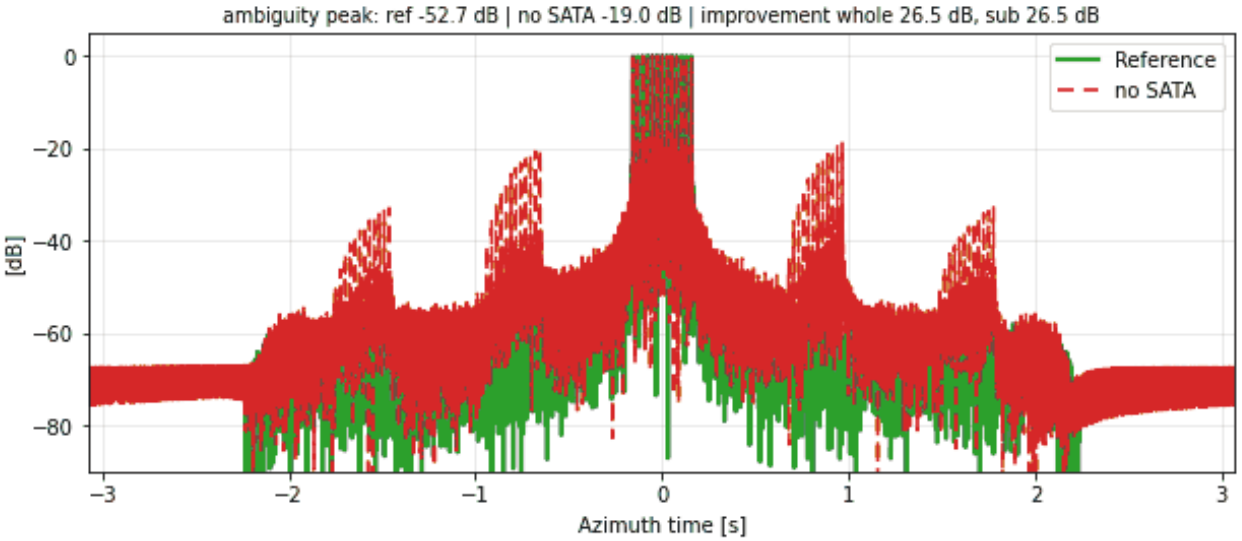



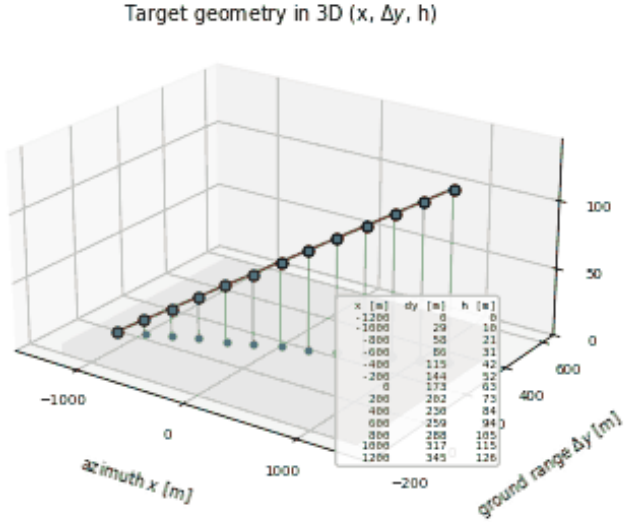



RA-SN-070 | SATA 1D | along-track ramp: N = 13, $\alpha = 3^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

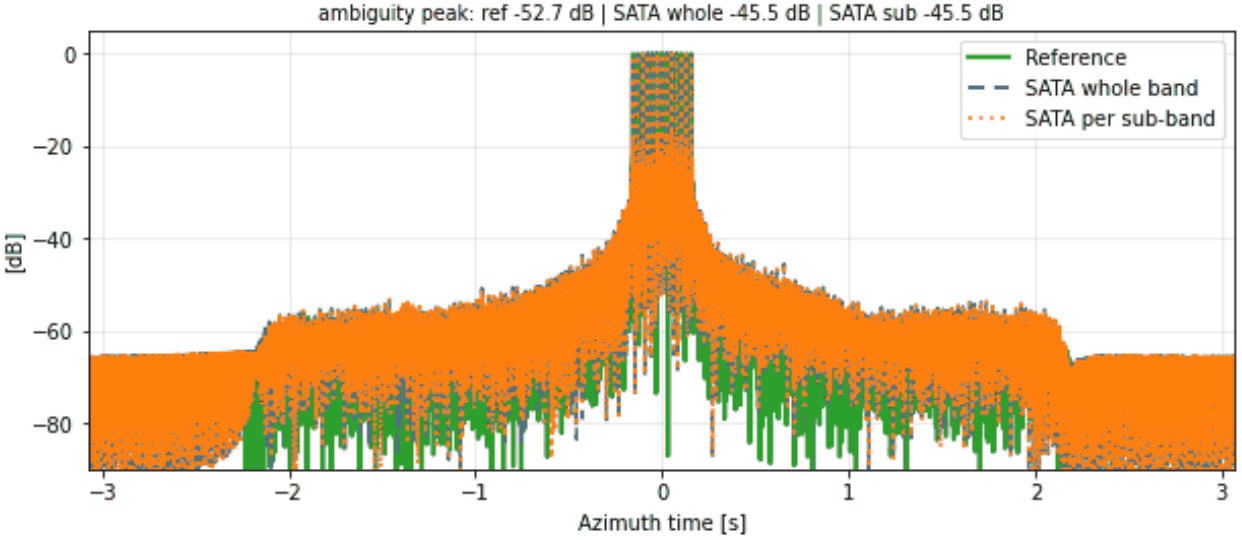


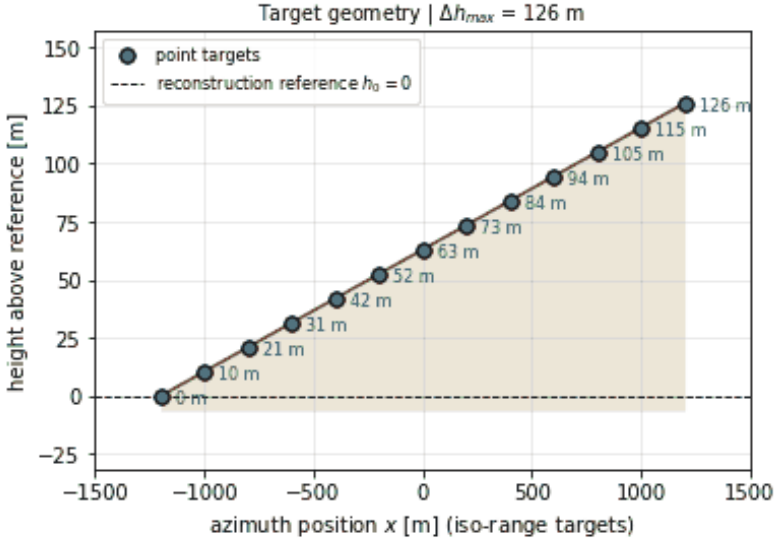



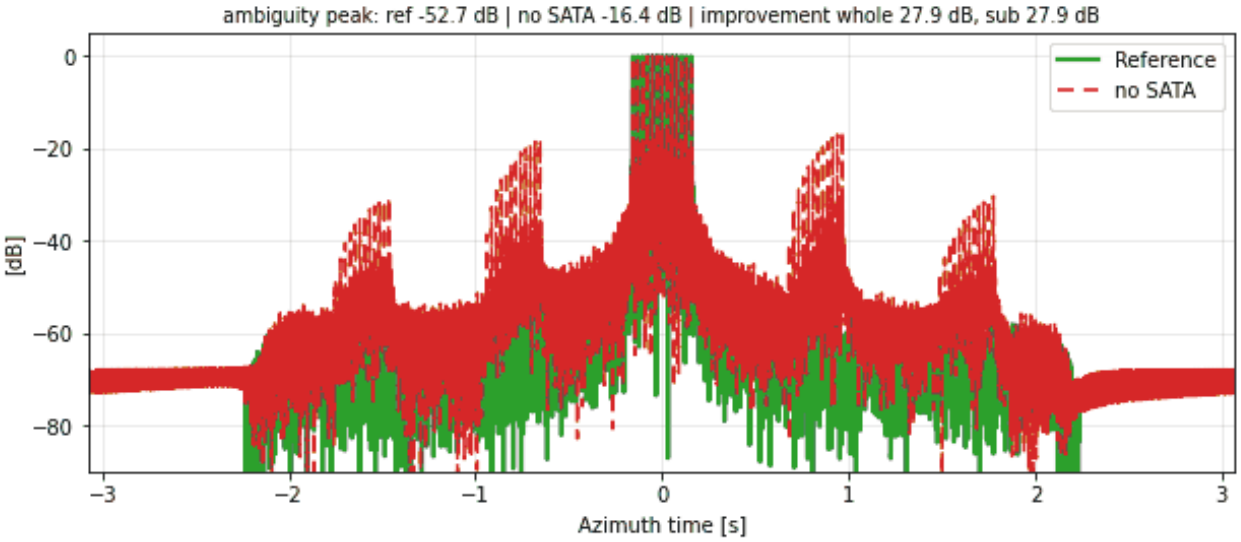



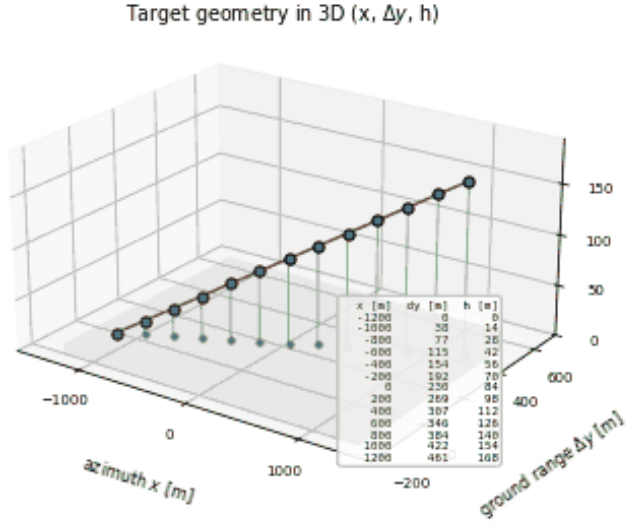



RA-SN-071 | SATA 1D | along-track ramp: N = 13, $\alpha = 4°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

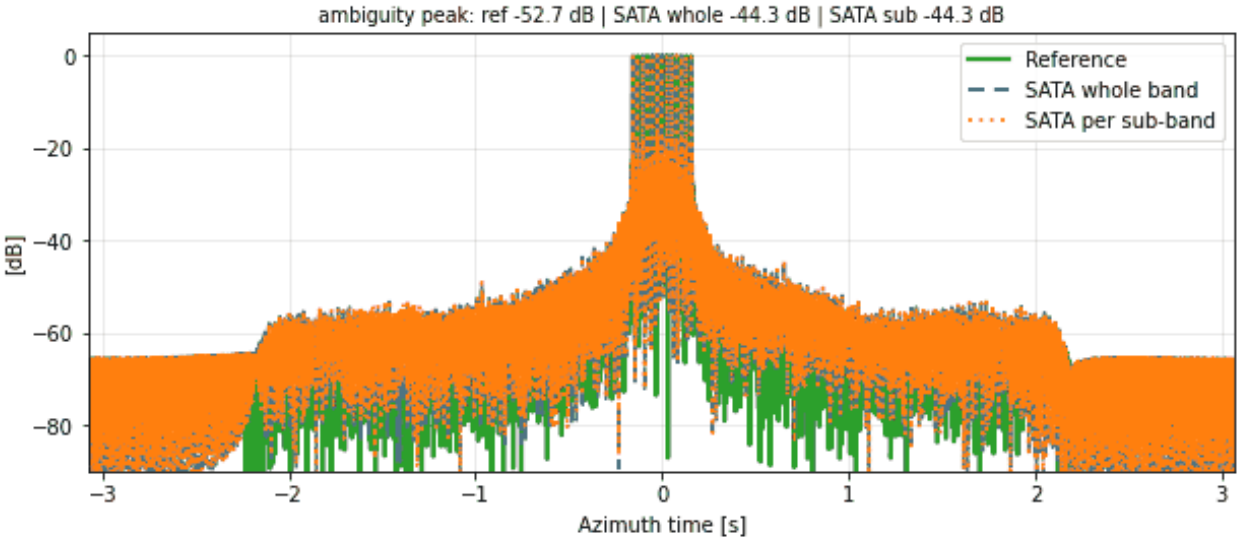


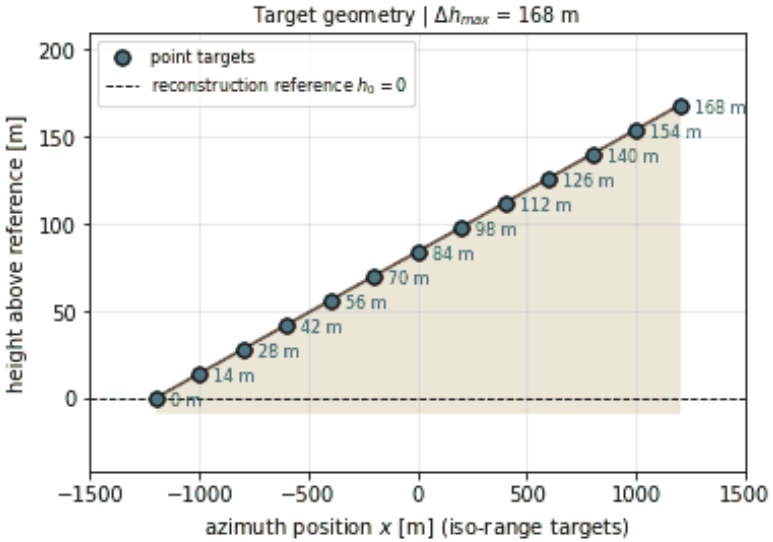



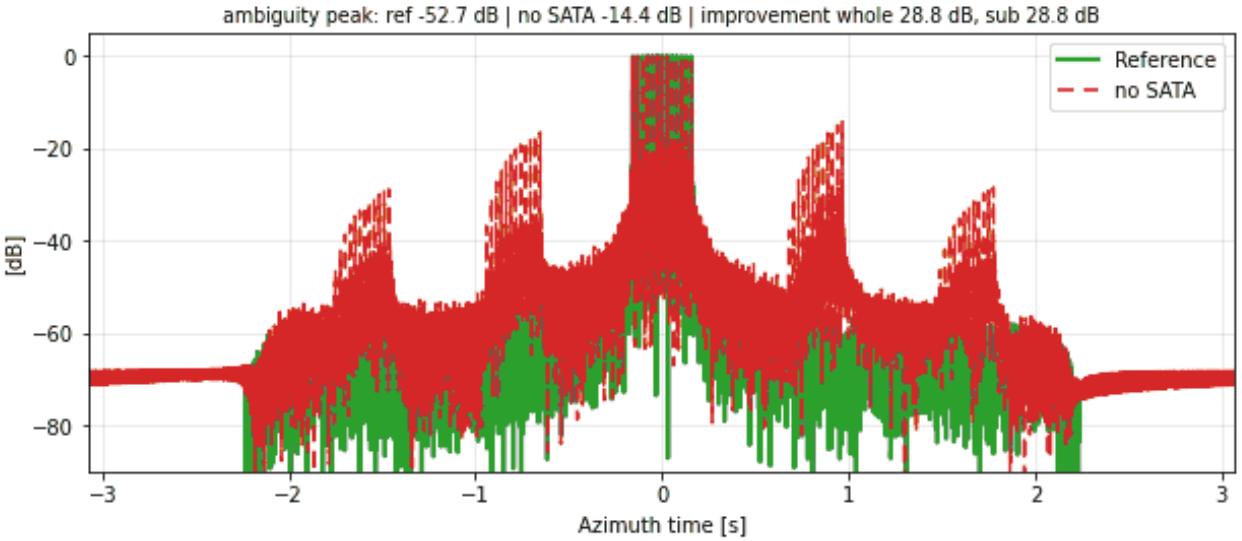



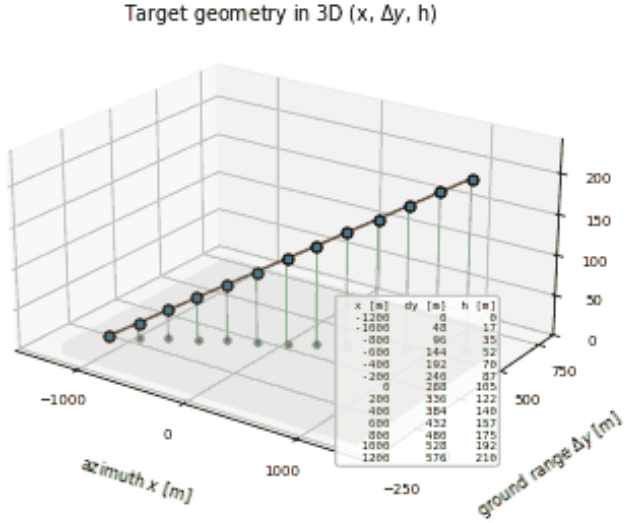



RA-SN-072 | SATA 1D | along-track ramp: N = 13, $\alpha = 5^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

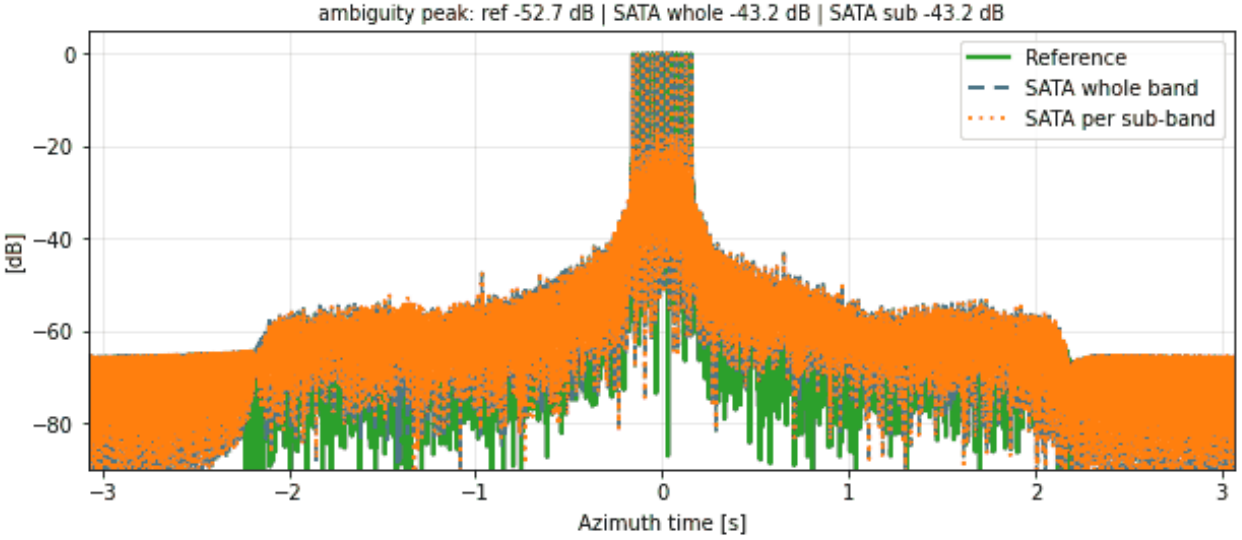


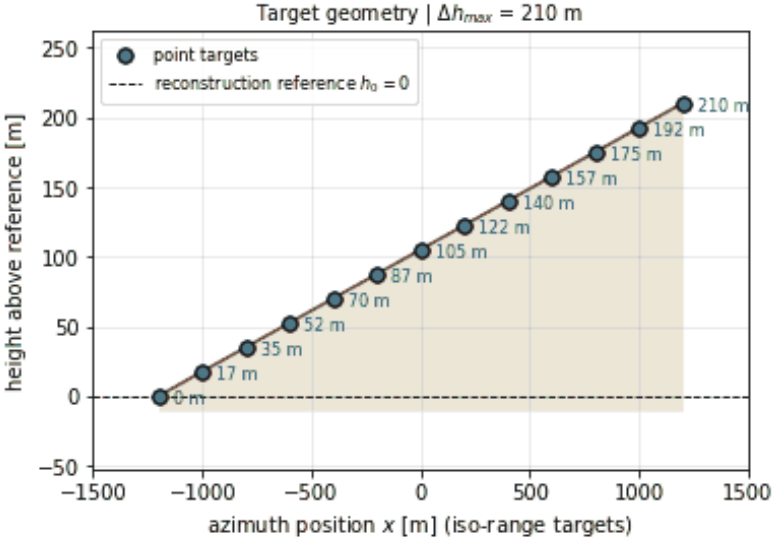



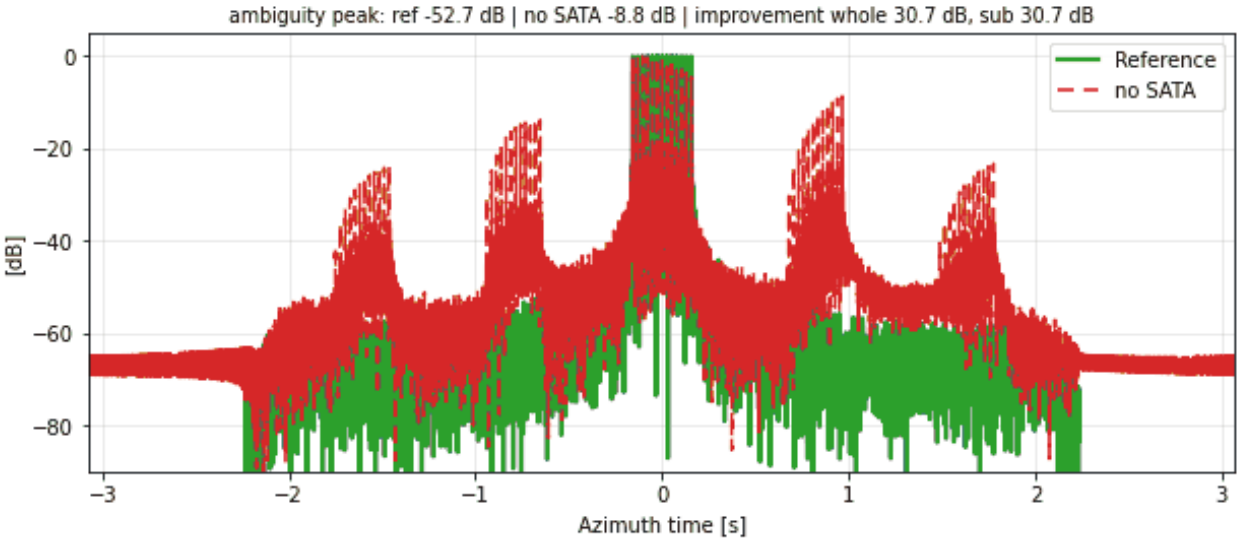



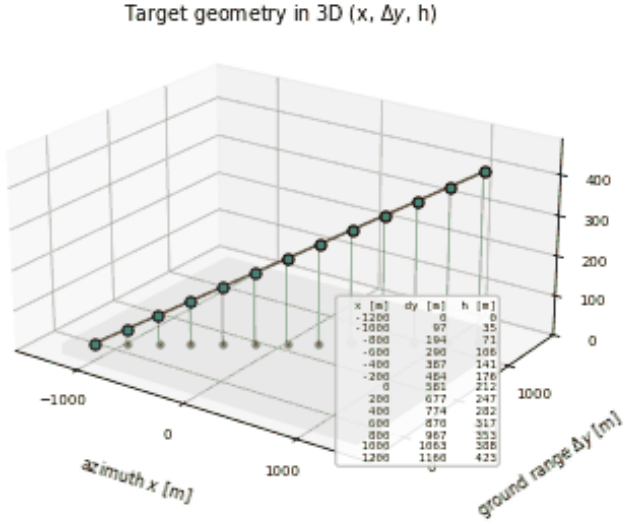



RA-SN-073 | SATA 1D | along-track ramp: N = 13, $\alpha = 10°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

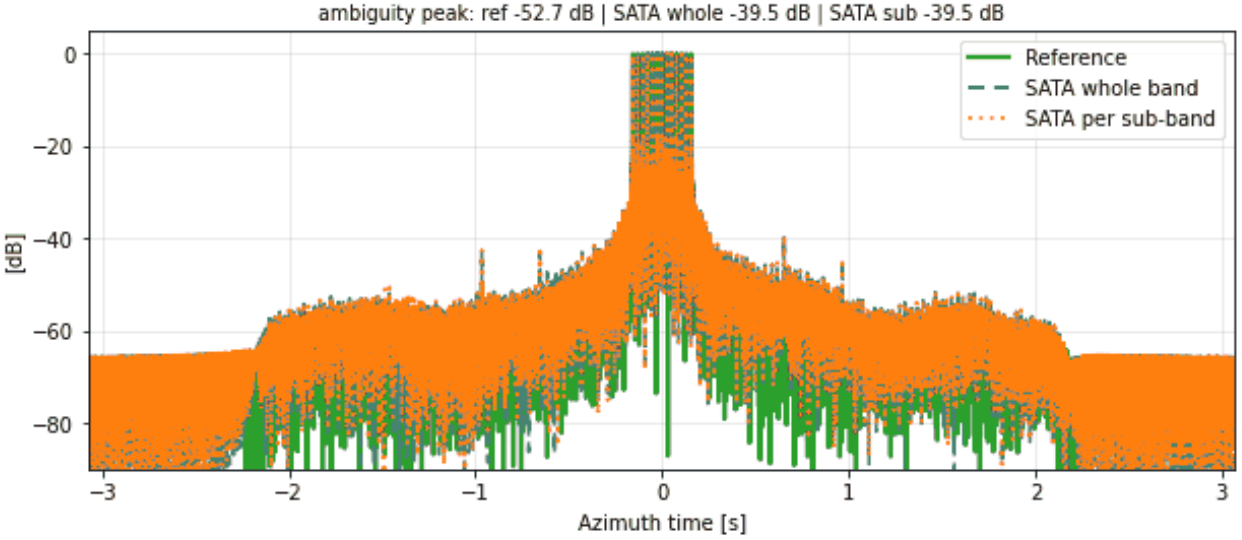


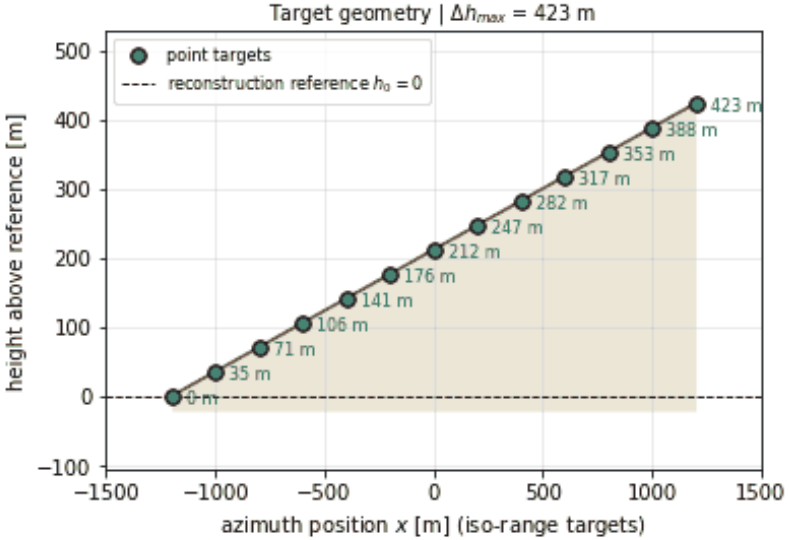



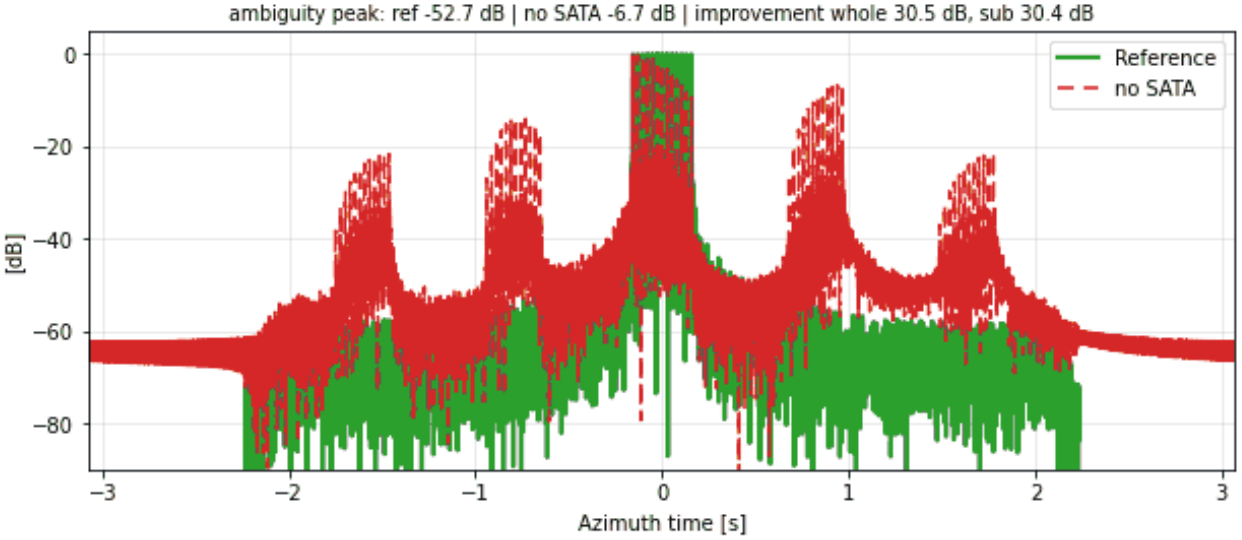



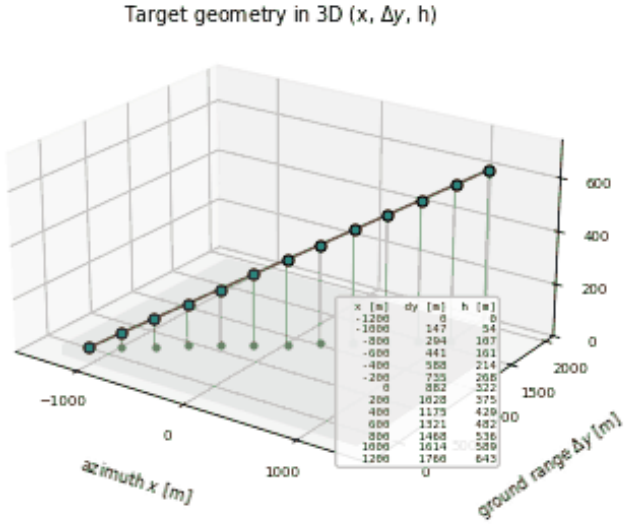



RA-SN-074 | SATA 1D | along-track ramp: N = 13, $\alpha = 15^\circ$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

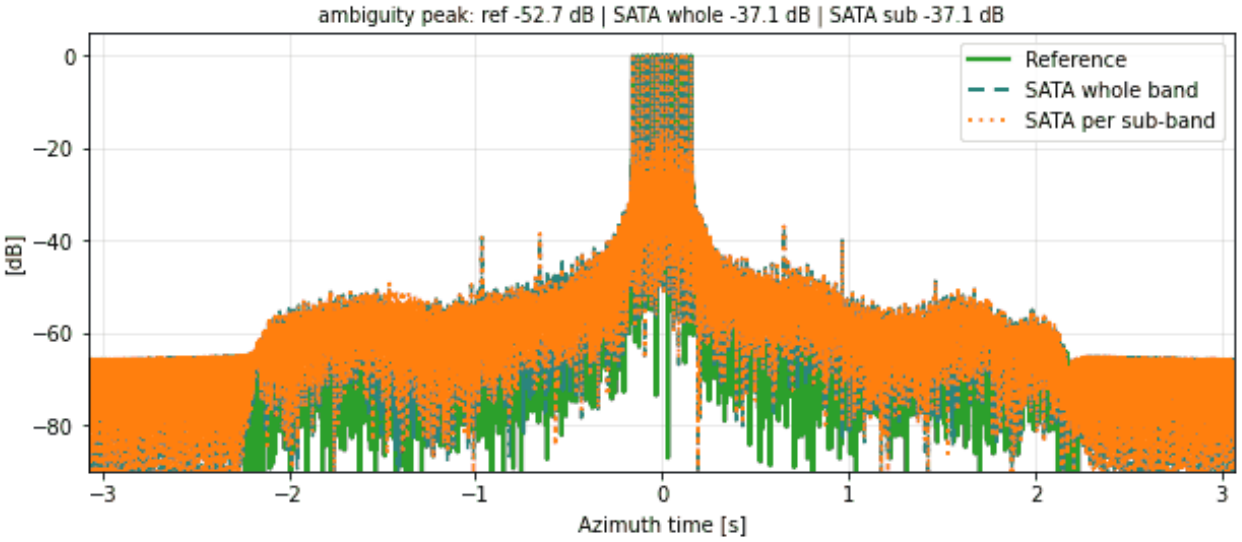

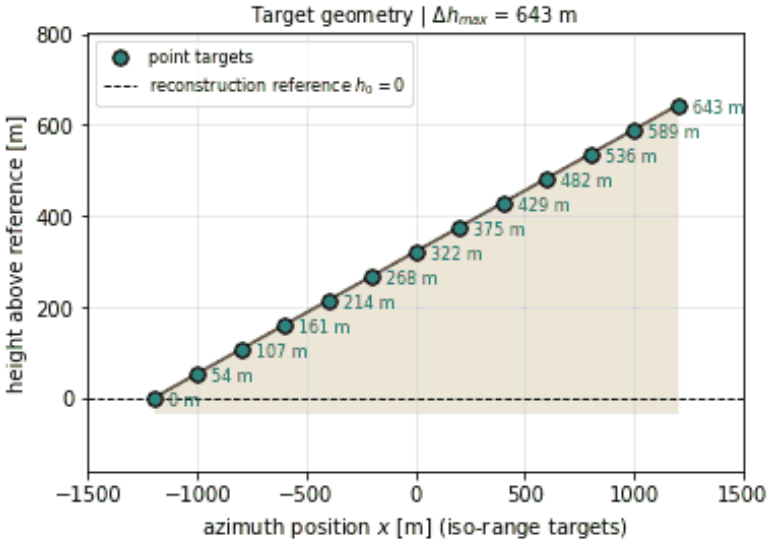



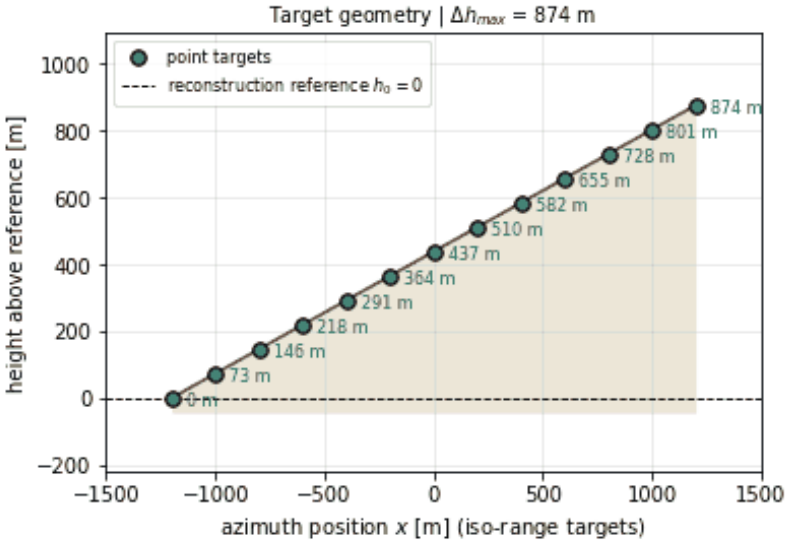



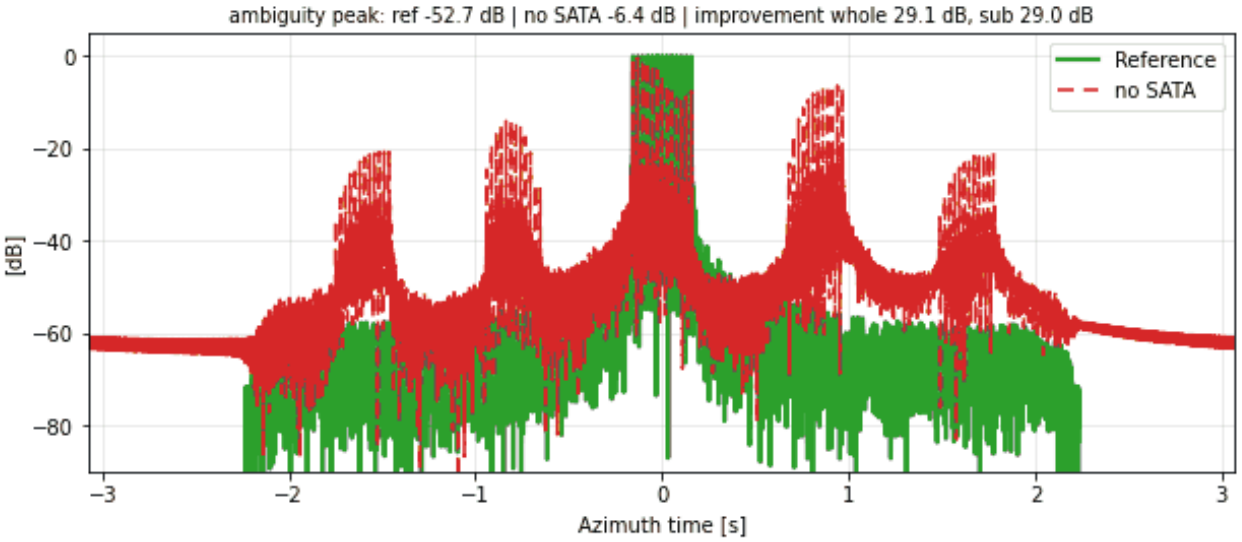



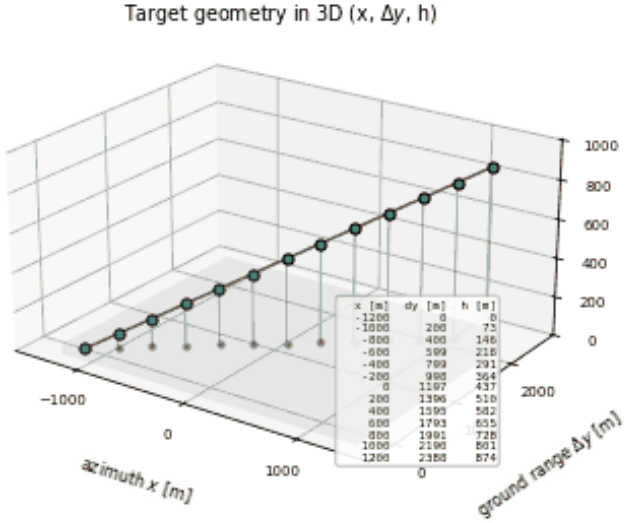
RA-SN-075 | SATA 1D | along-track ramp: N = 13, $\alpha = 20°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

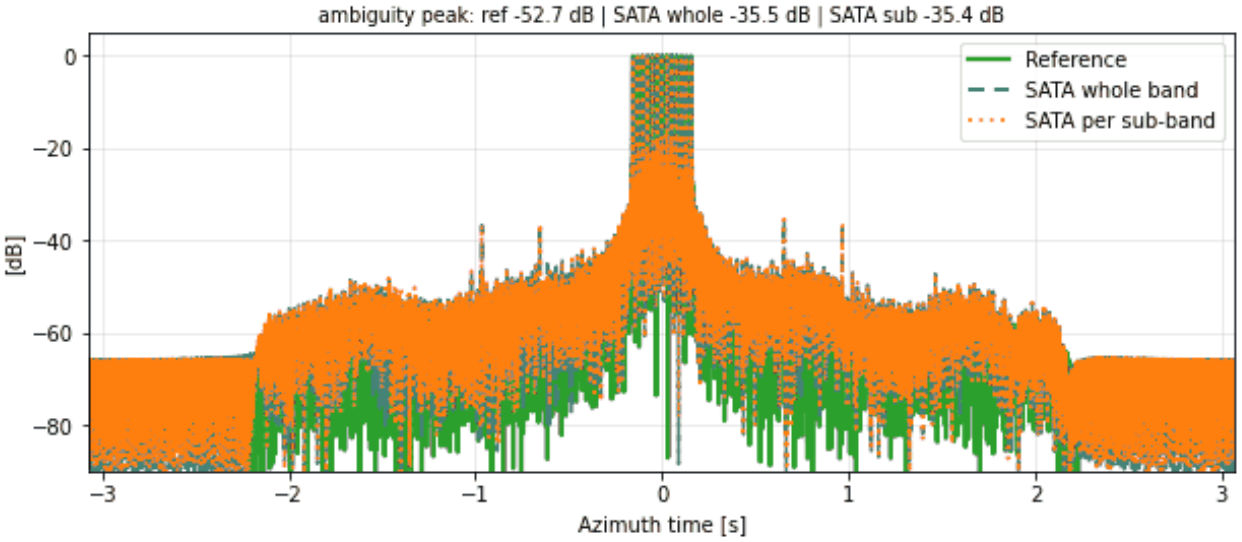





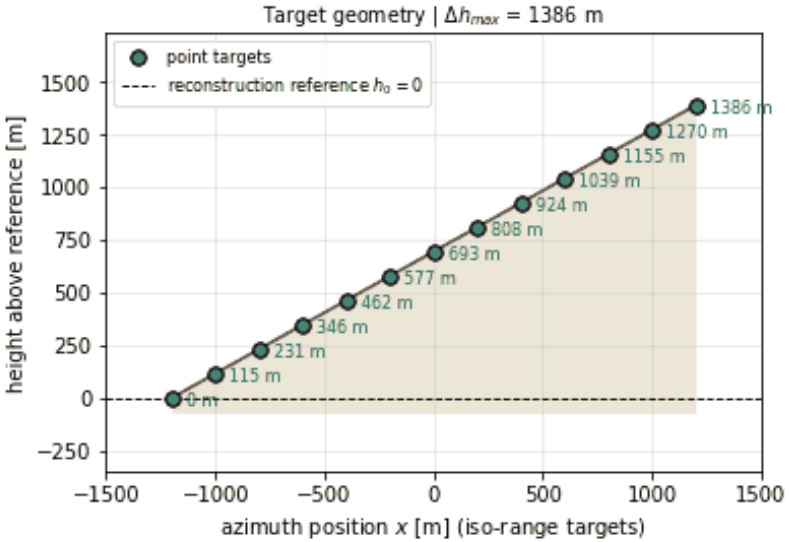



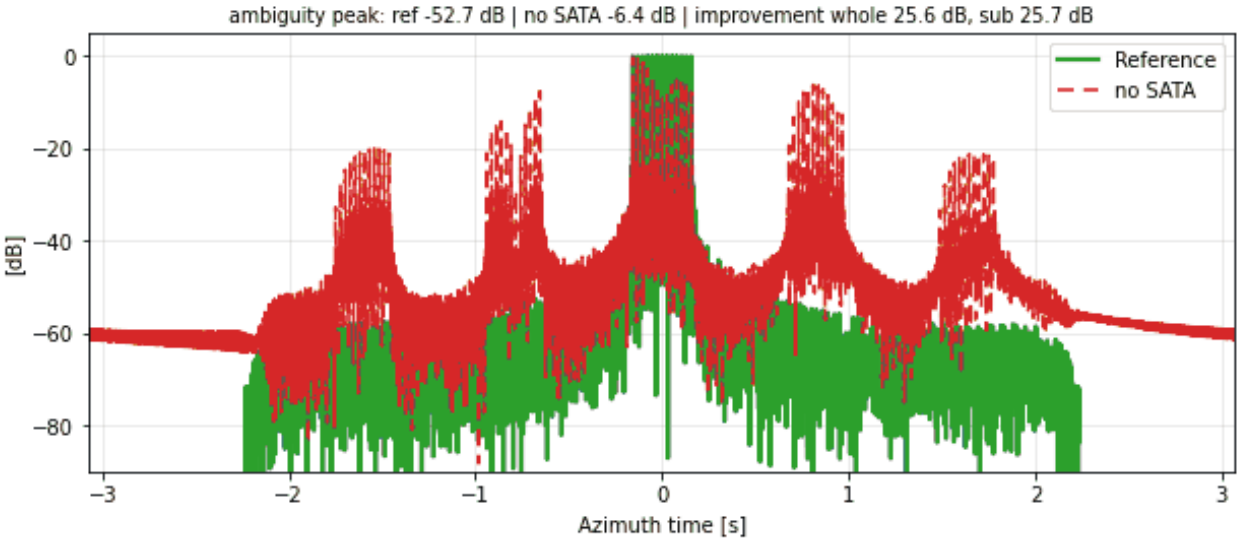



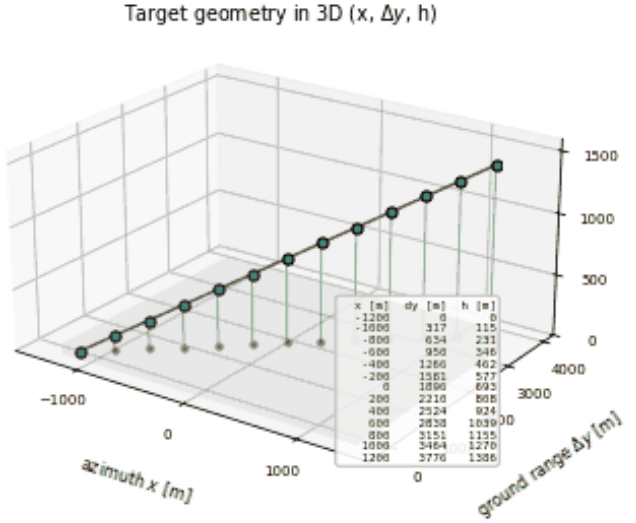
RA-SN-076 | SATA 1D | along-track ramp: N = 13, $\alpha = 30°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

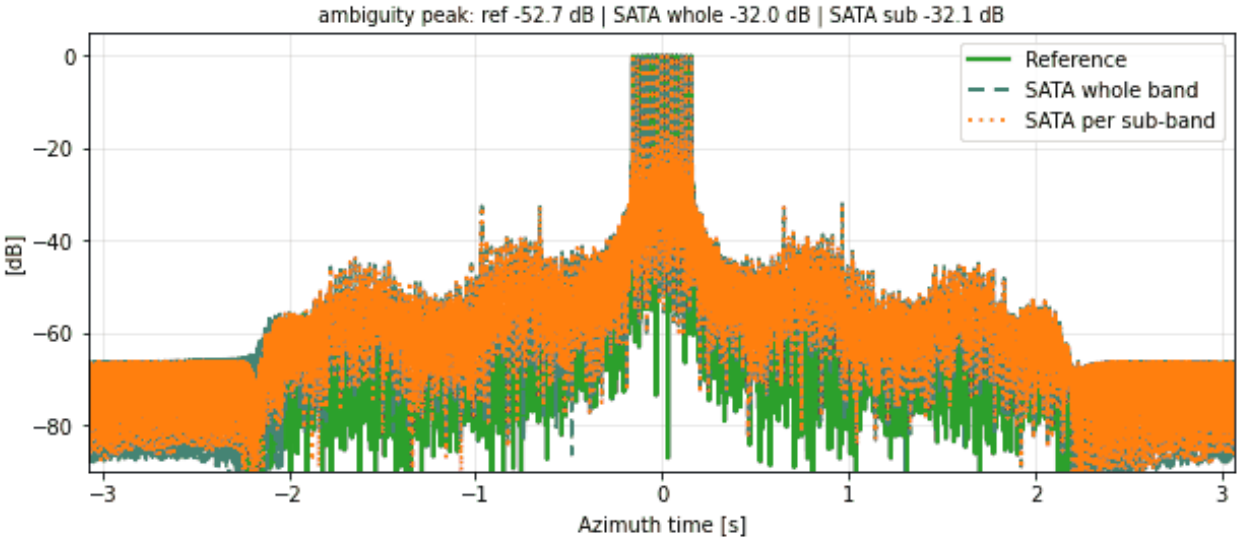






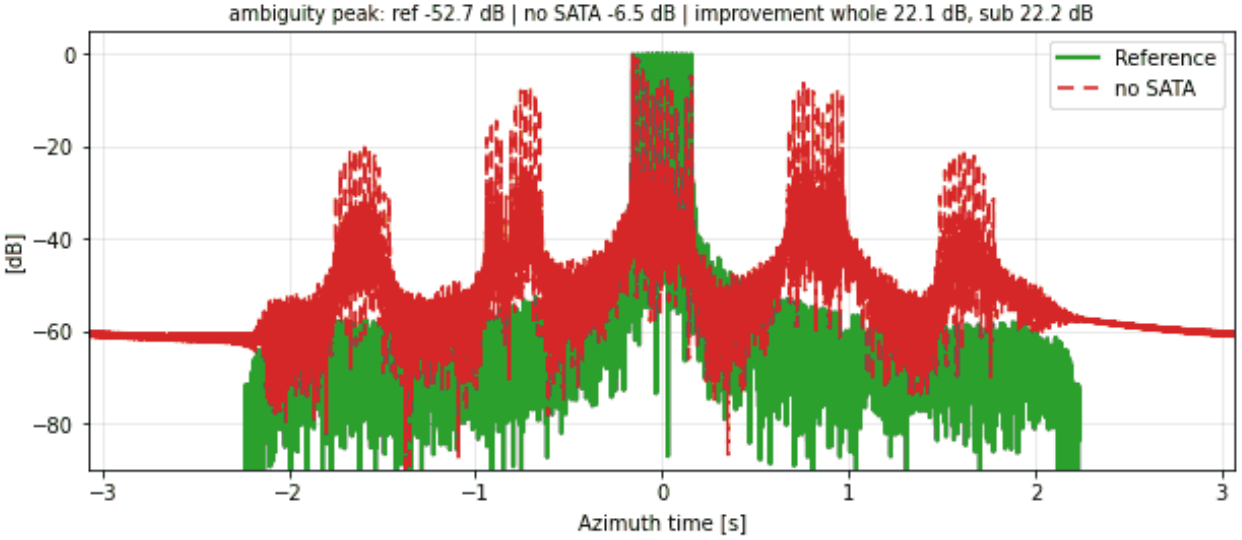



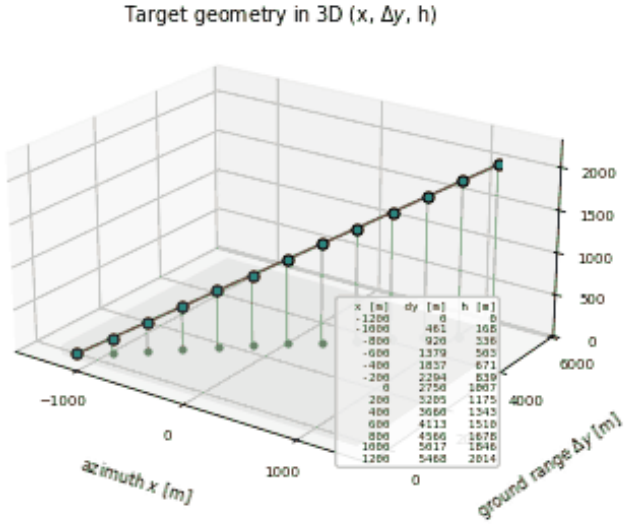



RA-SN-077 | SATA 1D | along-track ramp: N = 13, $\alpha = 40°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

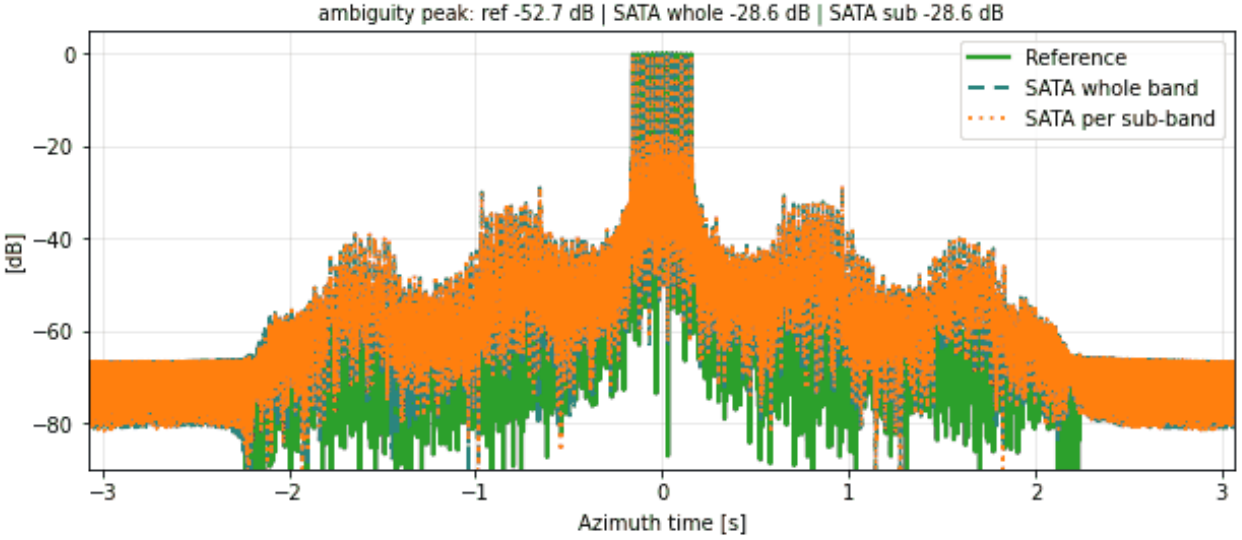


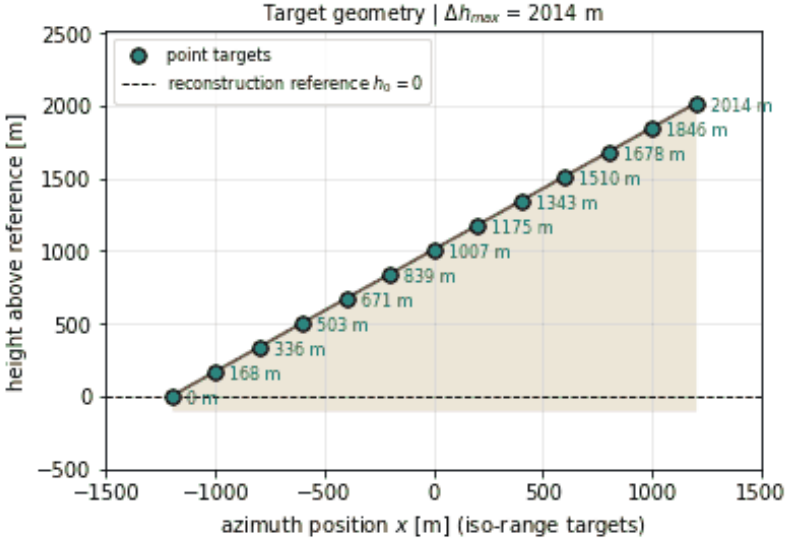



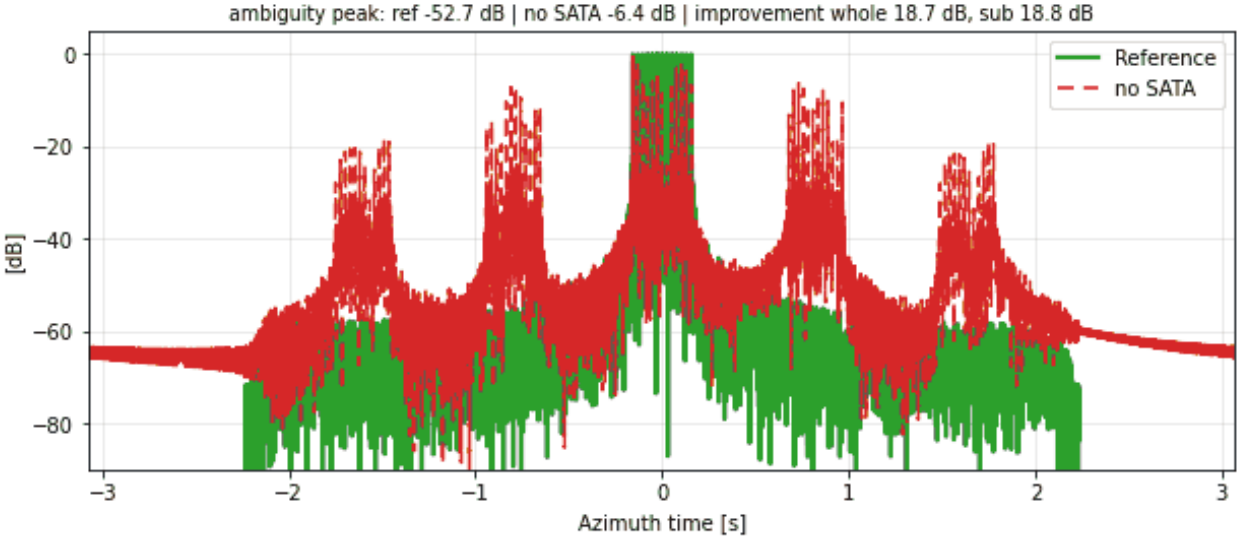



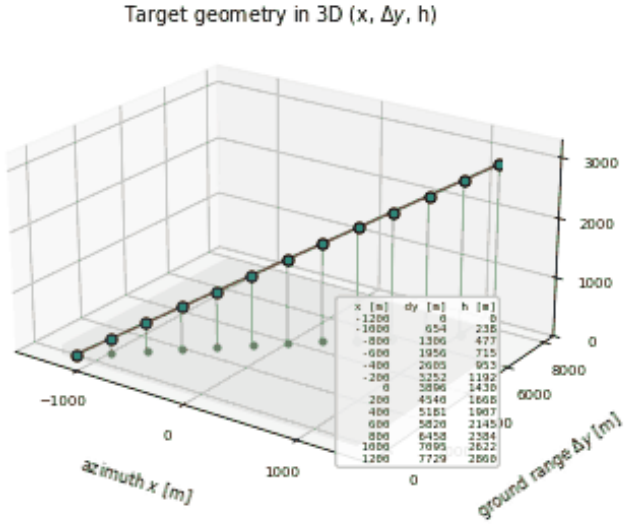



RA-SN-078 | SATA 1D | along-track ramp: N = 13, $\alpha = 50°$ (heights $j \cdot 200\tan\alpha$), targets 200 m apart (small distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

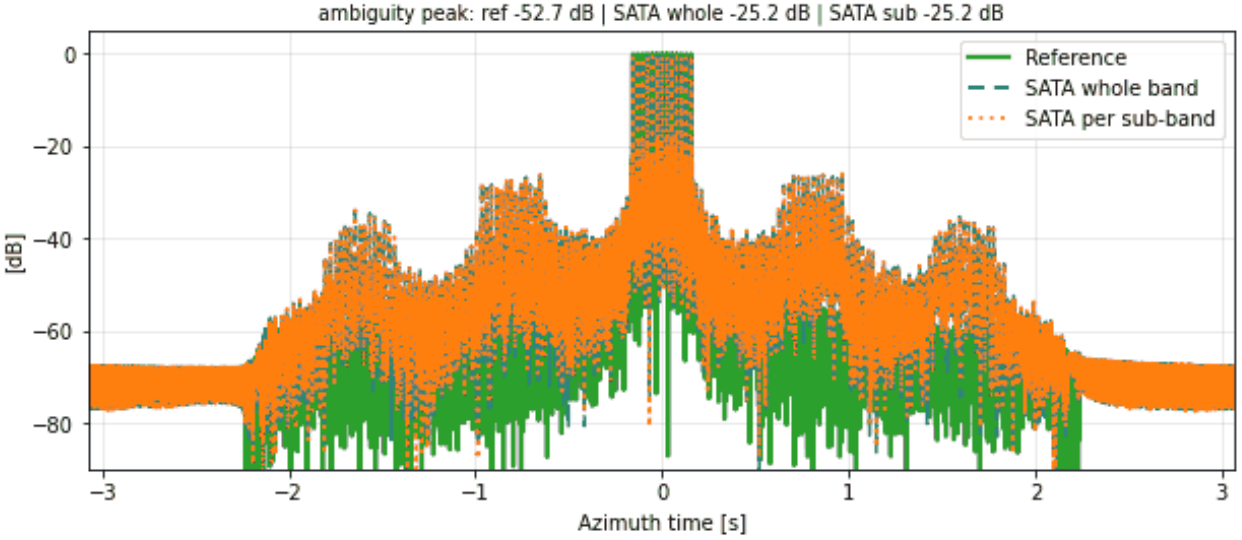


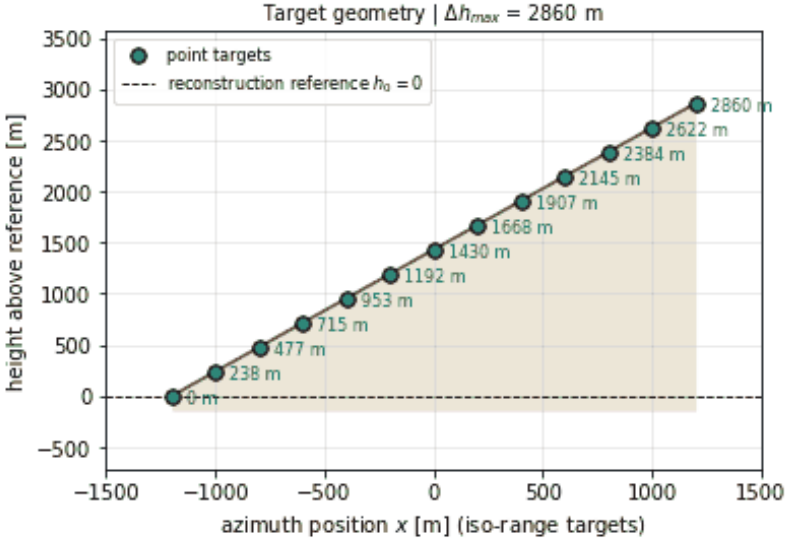



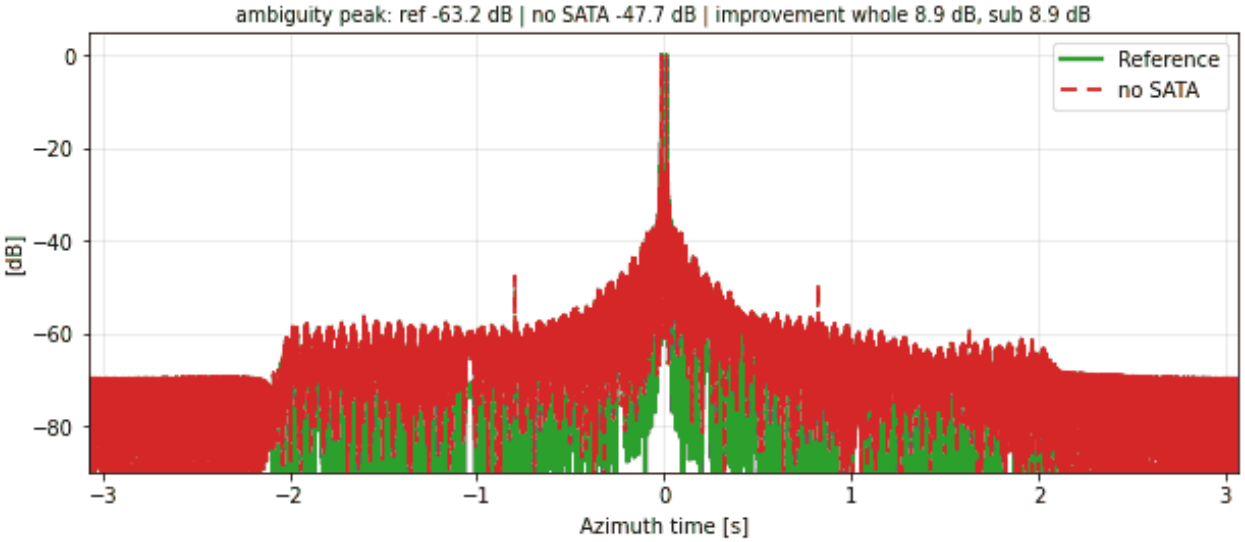



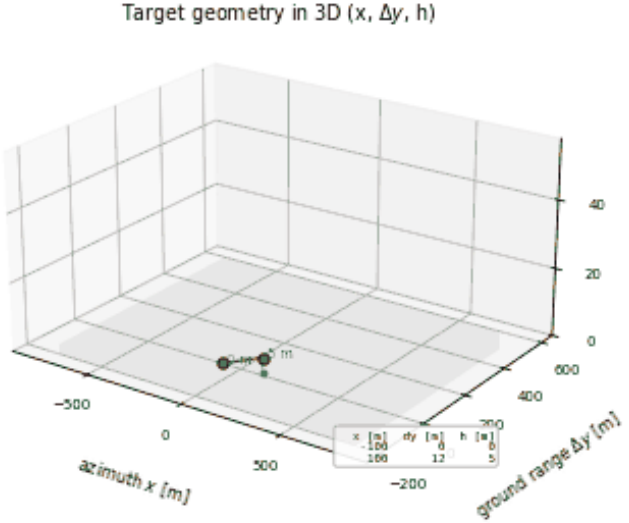



RA-SL-001 | SATA 1D | along-track ramp: N = 2, $\alpha = 0.1°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

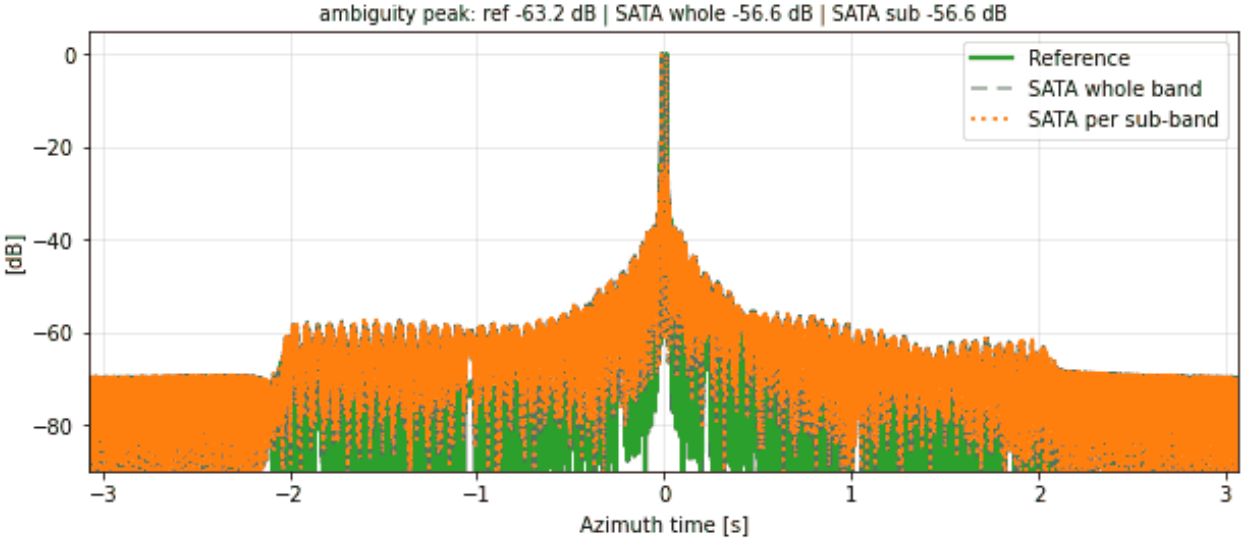


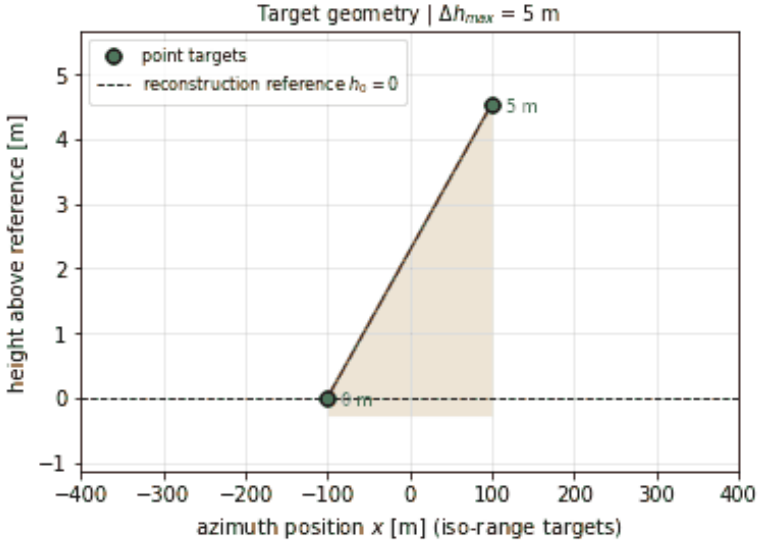



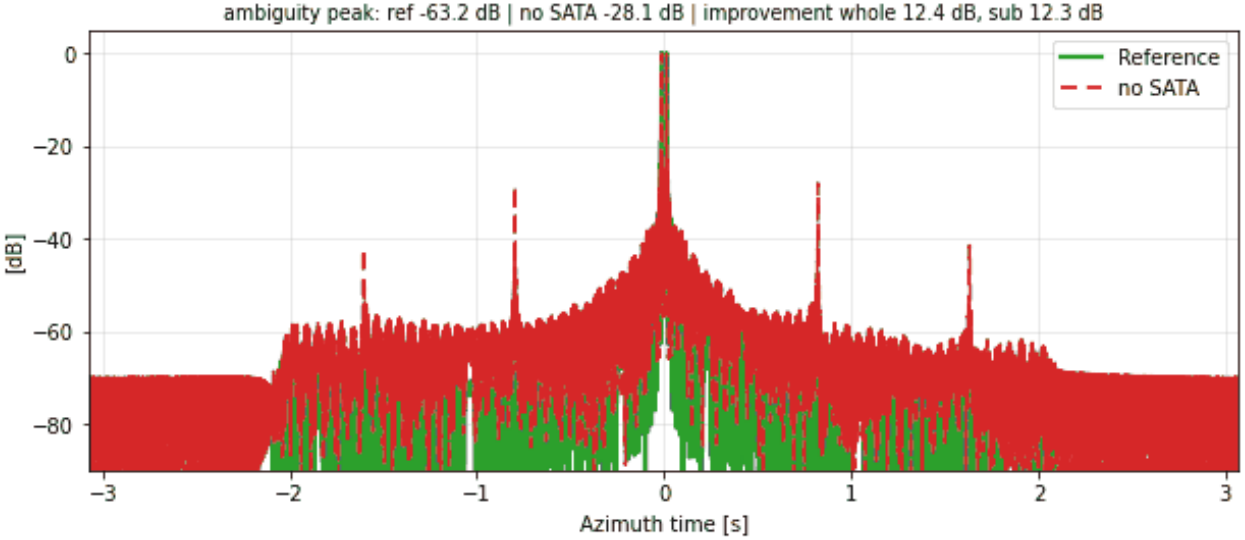



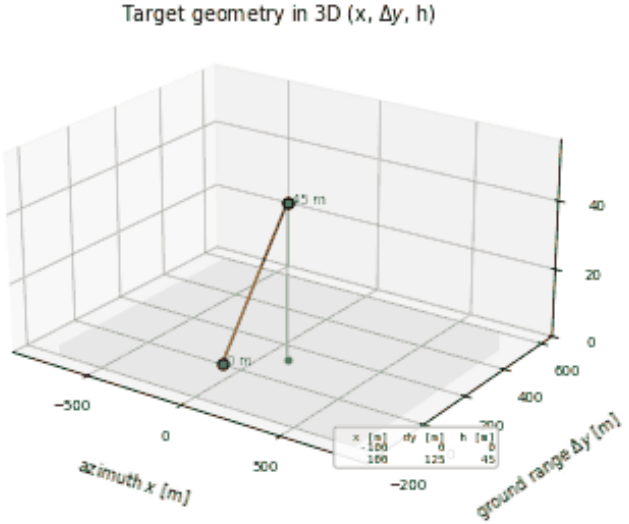



RA-SL-002 | SATA 1D | along-track ramp: N = 2, $\alpha = 1^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

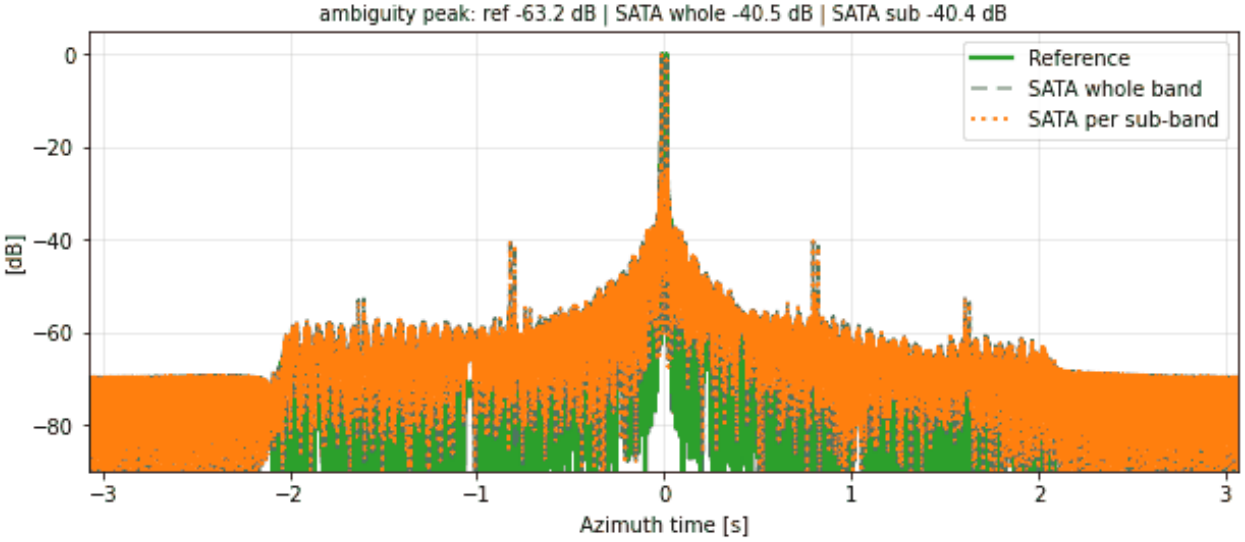


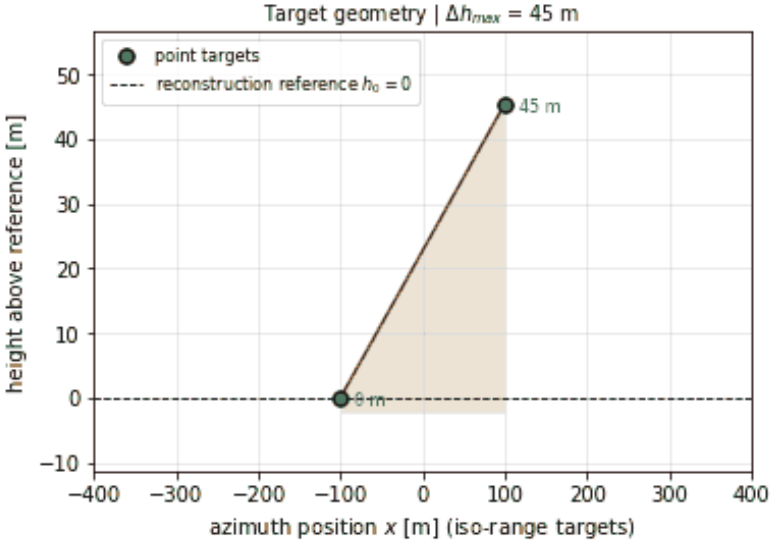



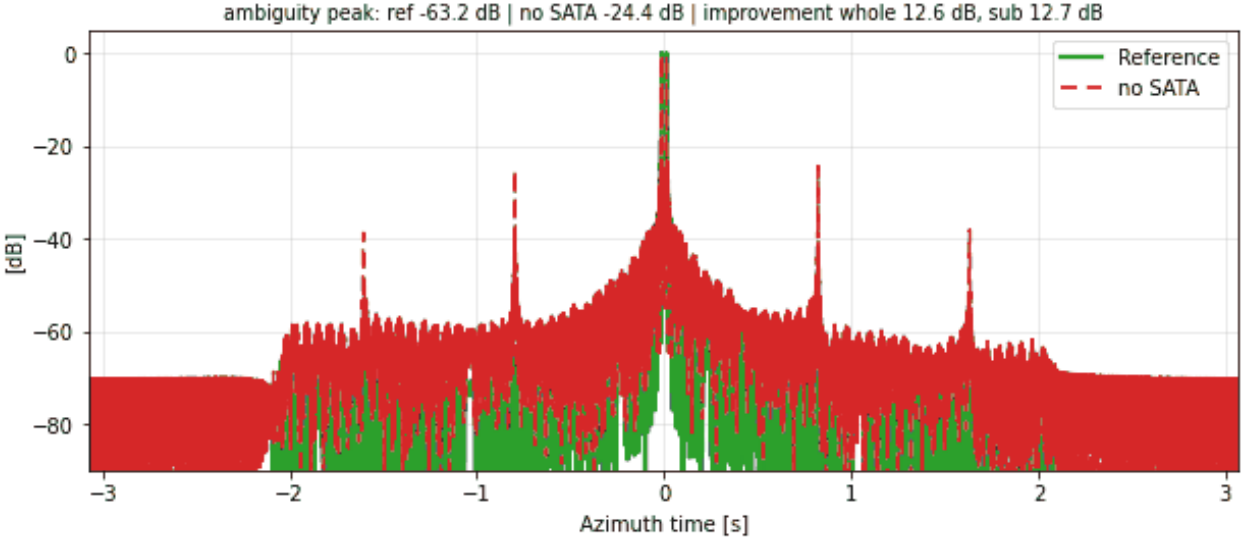



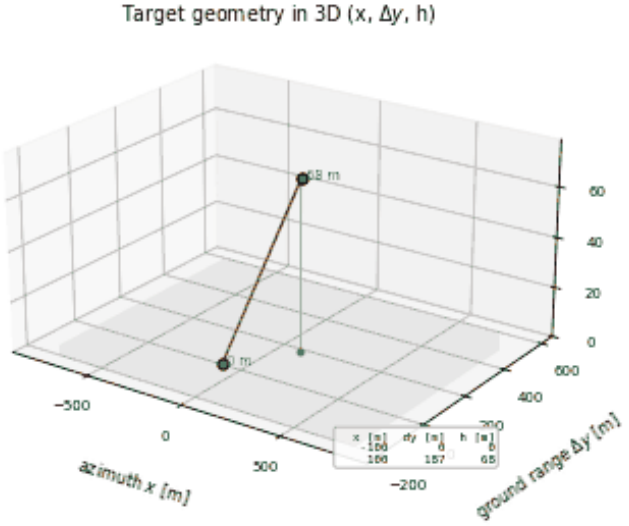



RA-SL-003 | SATA 1D | along-track ramp: N = 2, $\alpha = 1.5°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

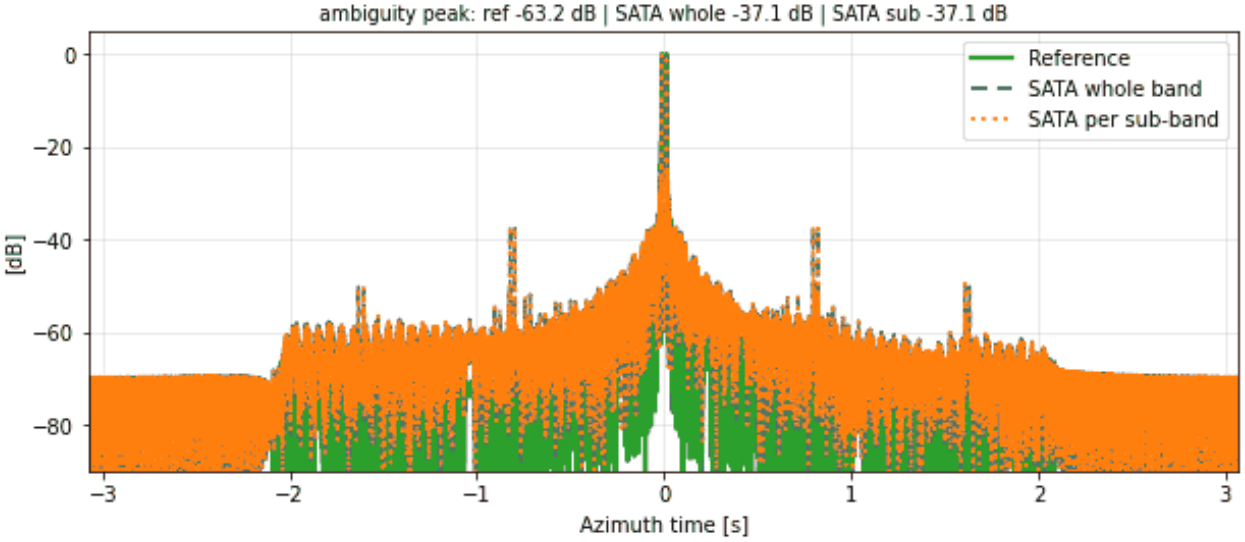


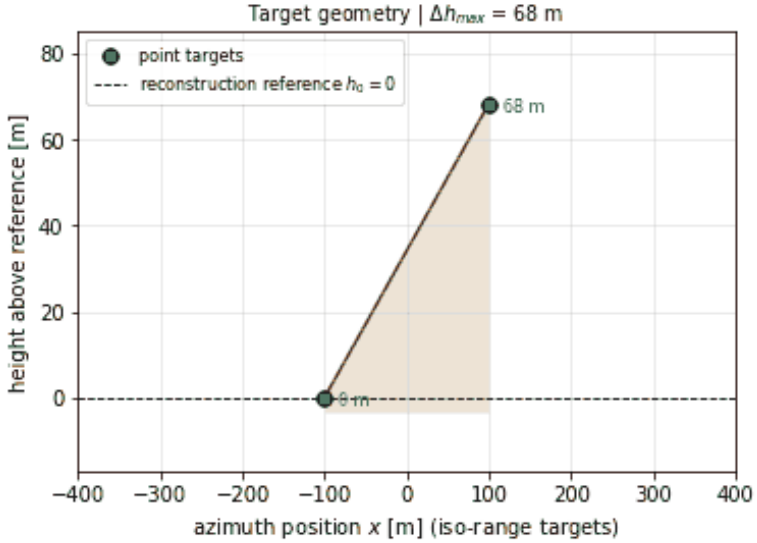



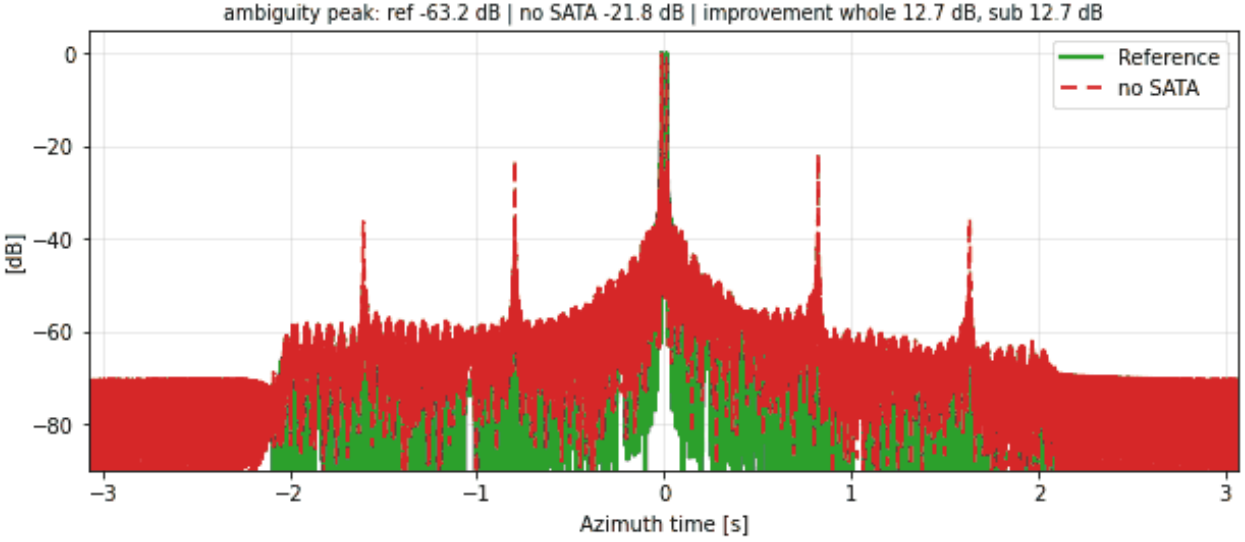



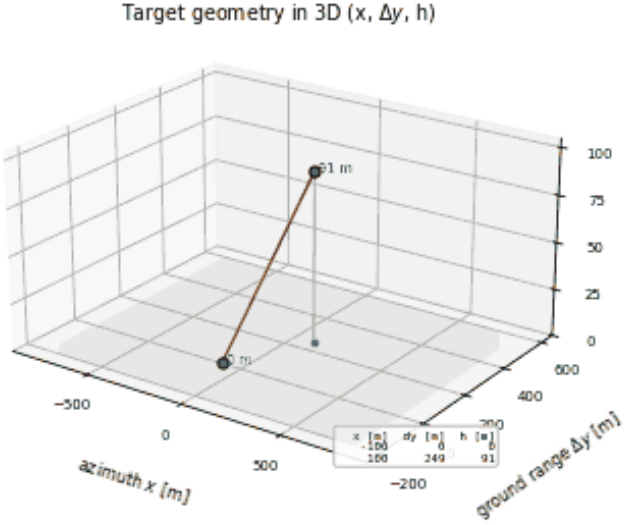



RA-SL-004 | SATA 1D | along-track ramp: N = 2, $\alpha = 2^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a = 1235$ Hz | $\Delta b_{at} = 7.69$ m (DPCA)

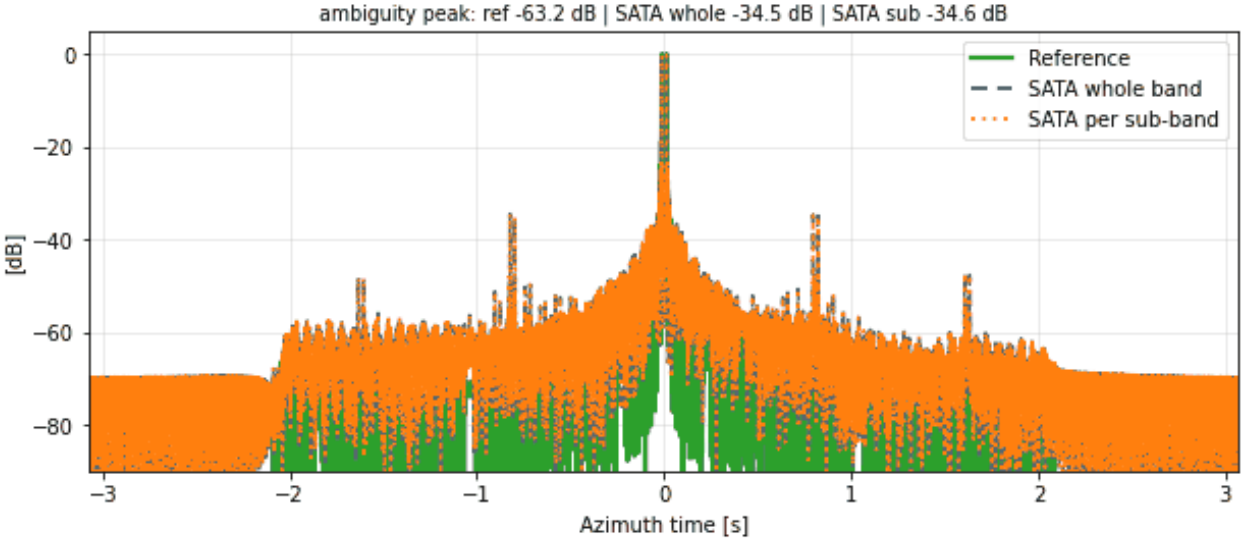


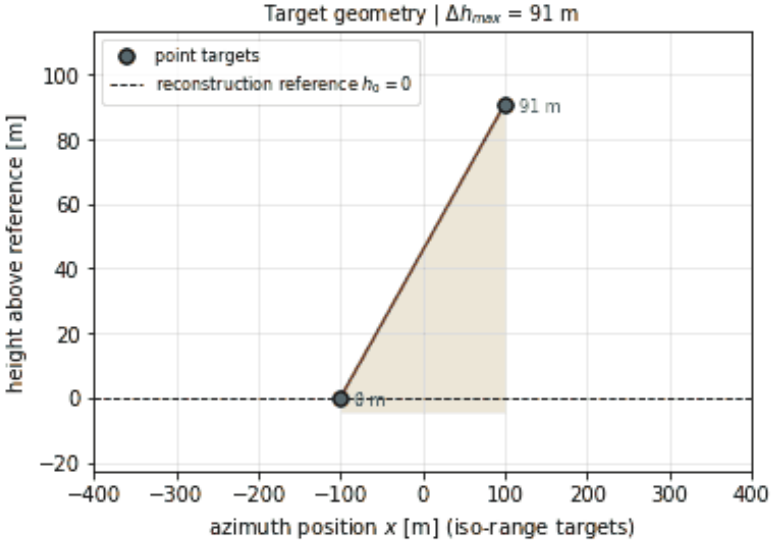



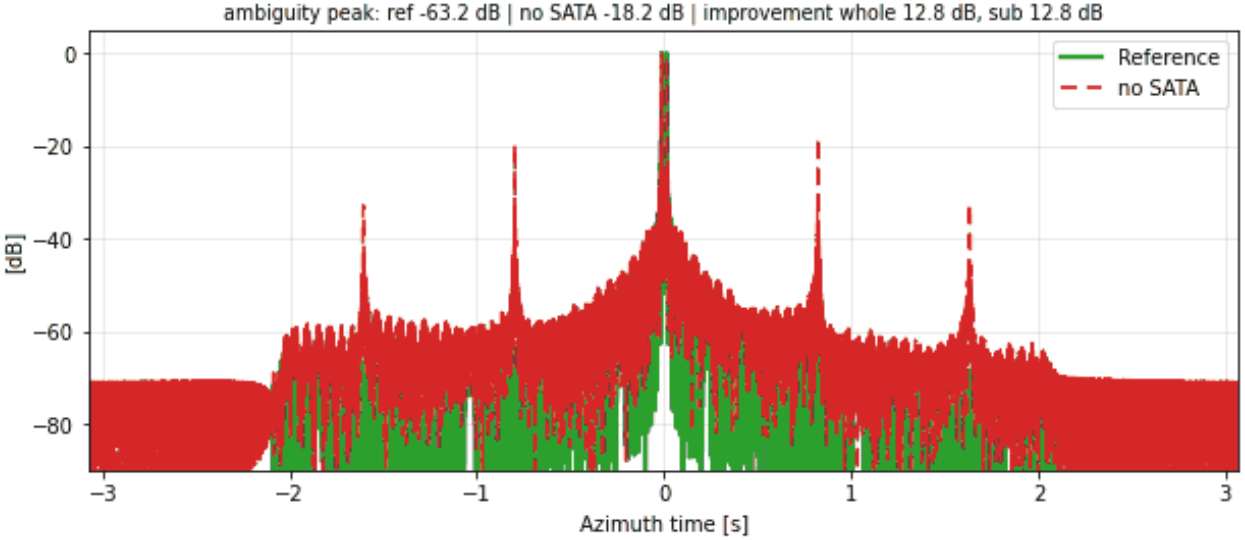



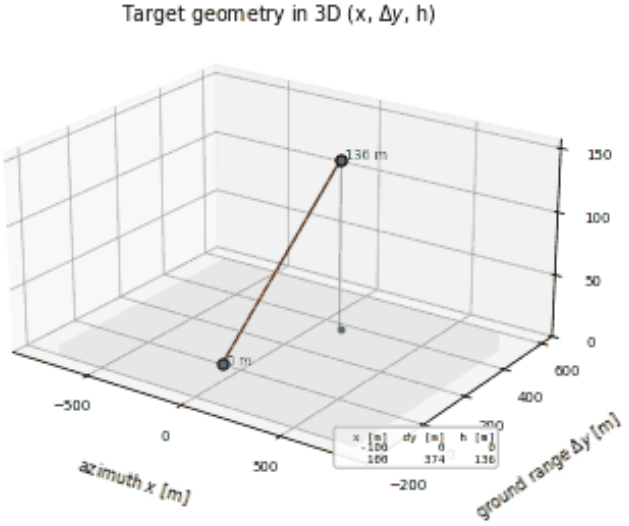



RA-SL-005 | SATA 1D | along-track ramp: N = 2, $\alpha = 3°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

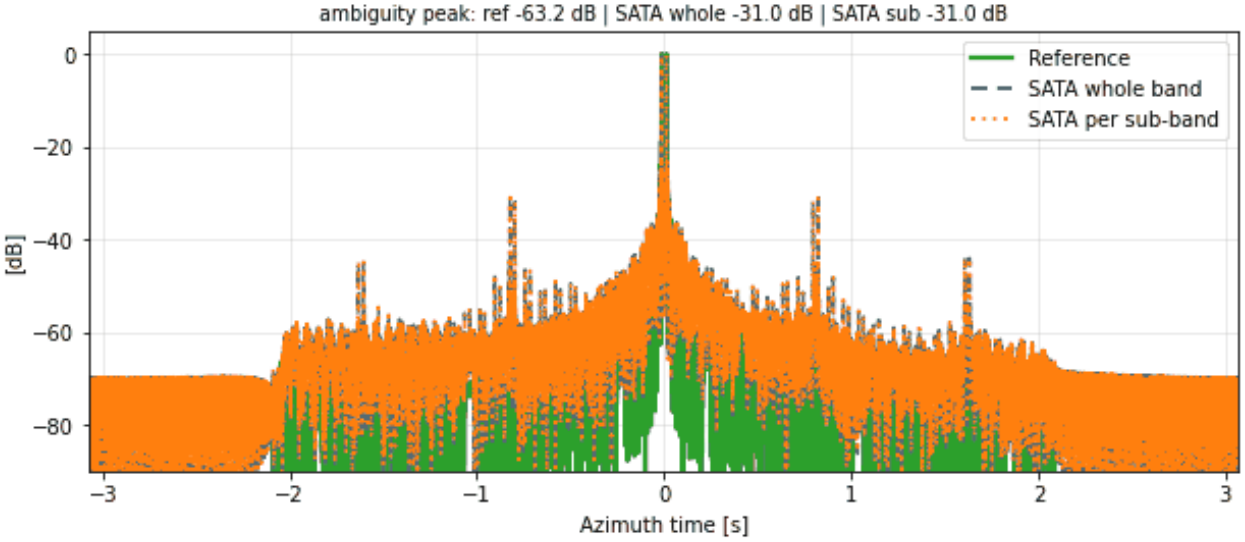


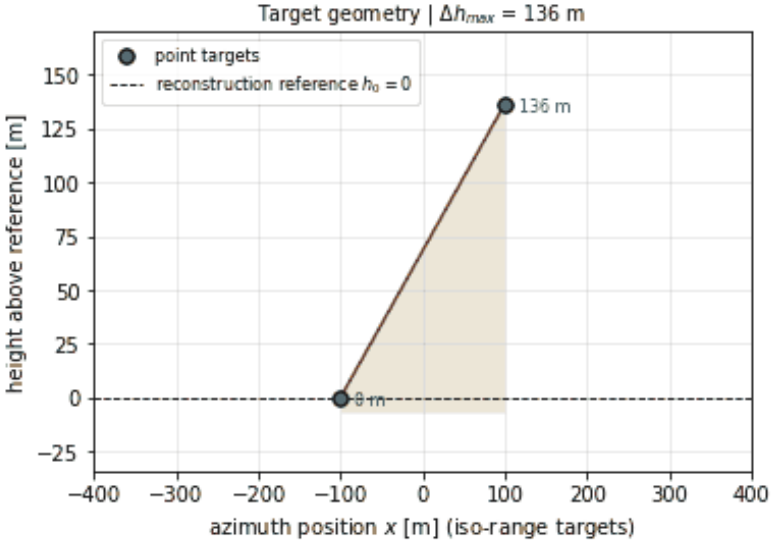



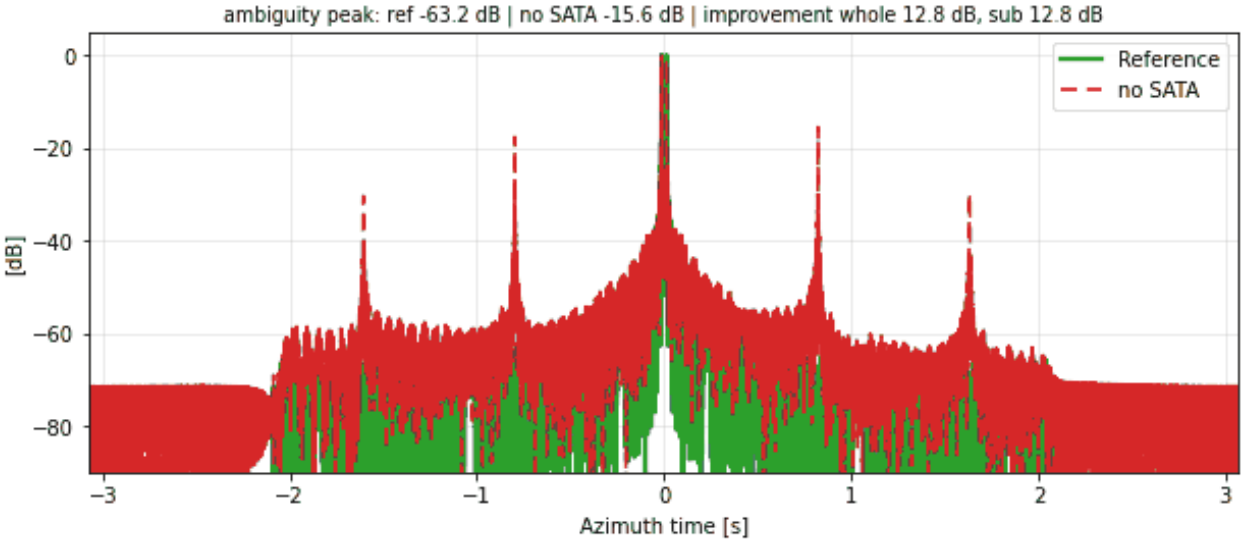



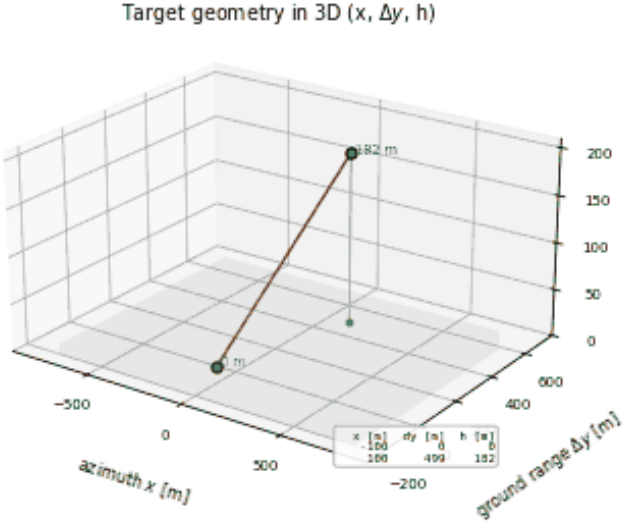



RA-SL-006 | SATA 1D | along-track ramp: N = 2, $\alpha = 4°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

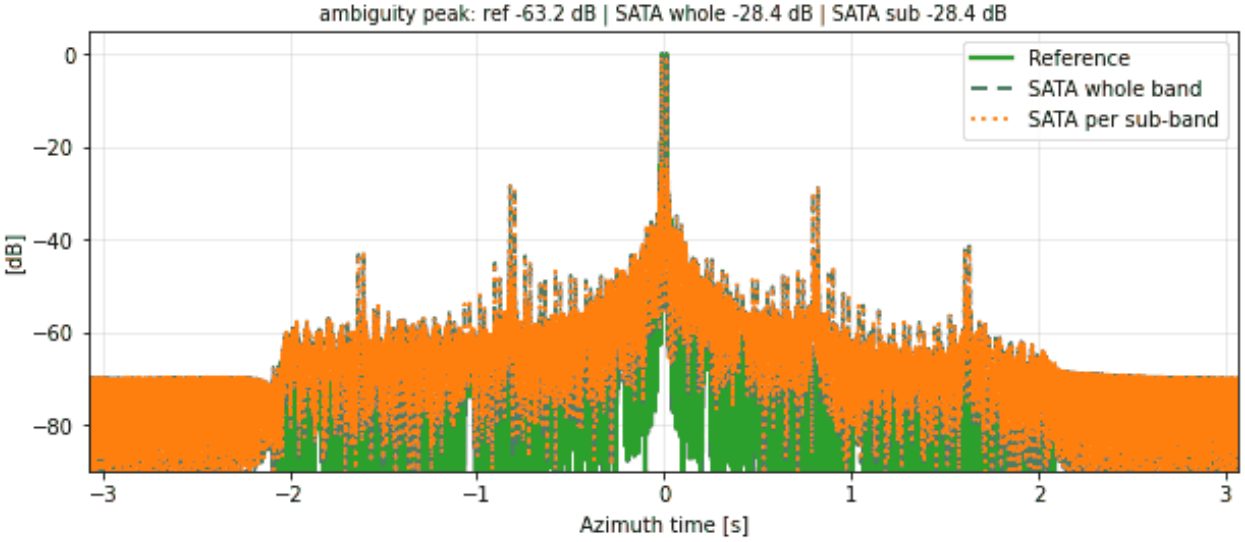


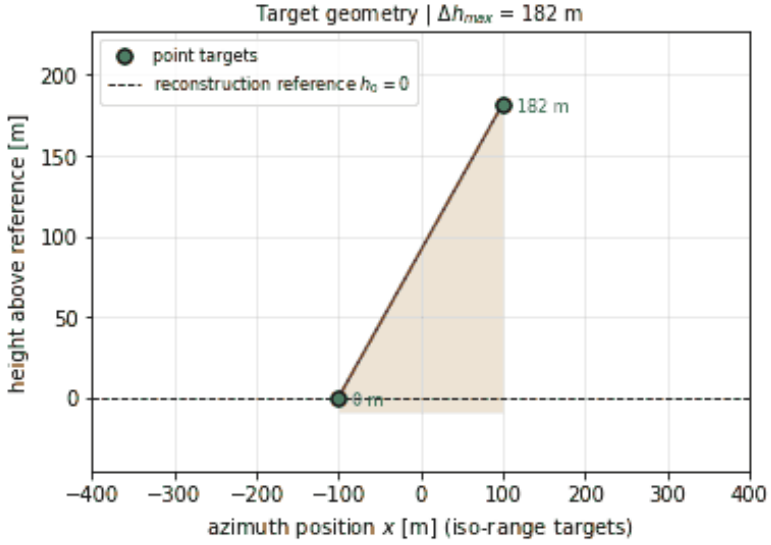



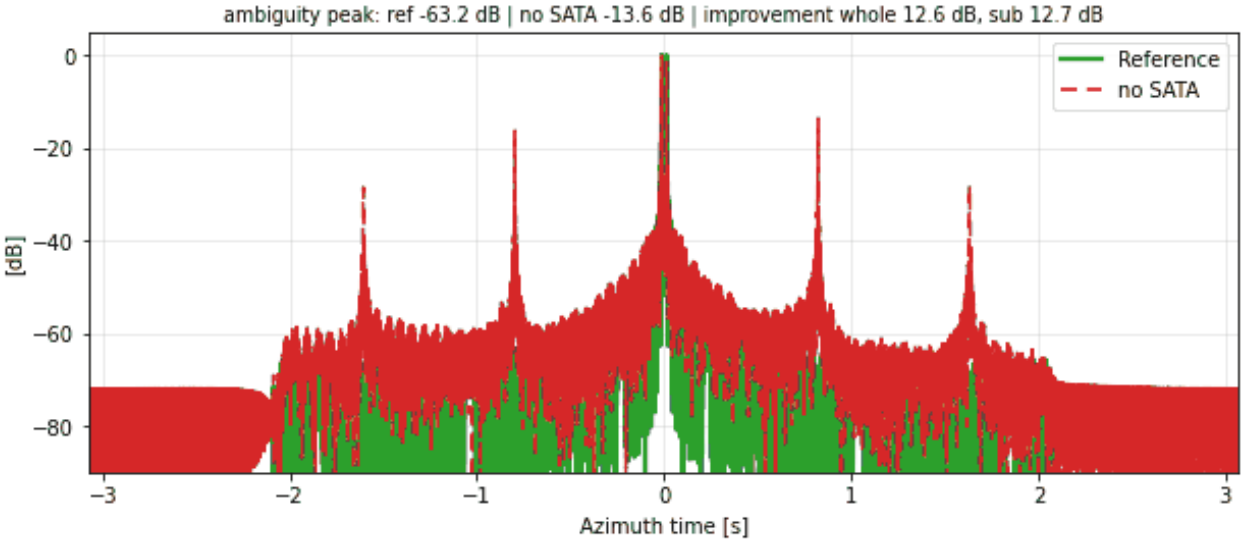



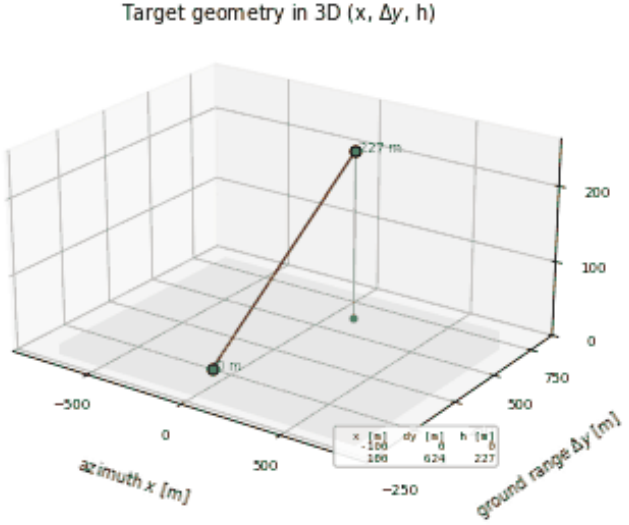



RA-SL-007 | SATA 1D | along-track ramp: N = 2, $\alpha = 5^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

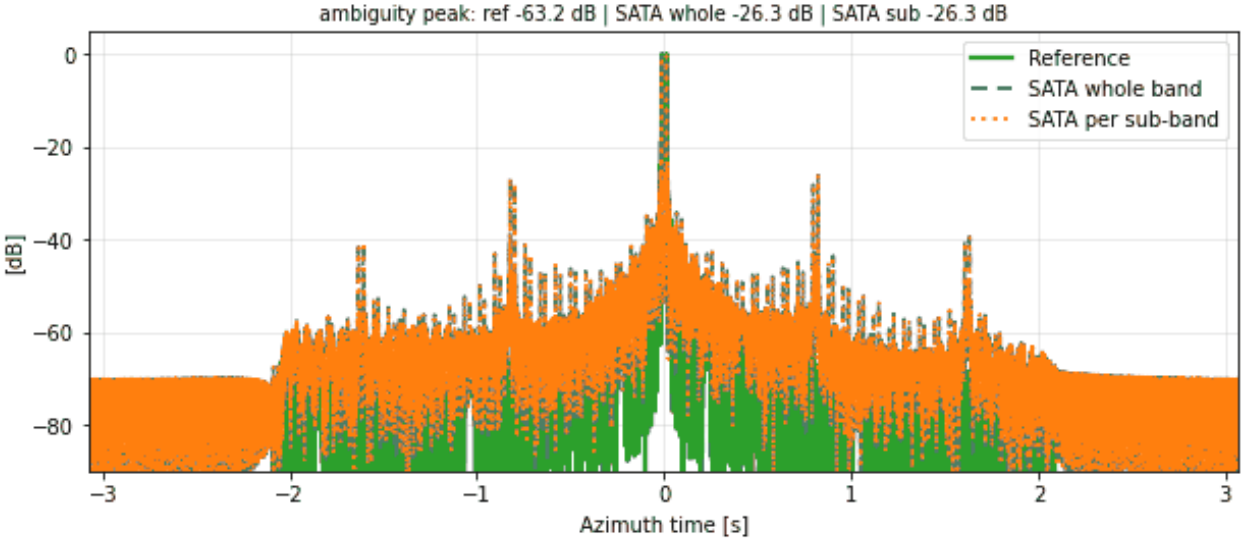


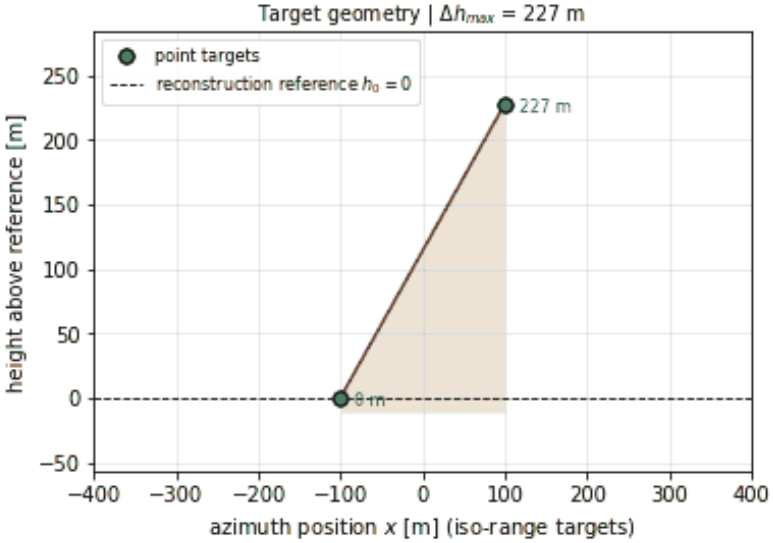



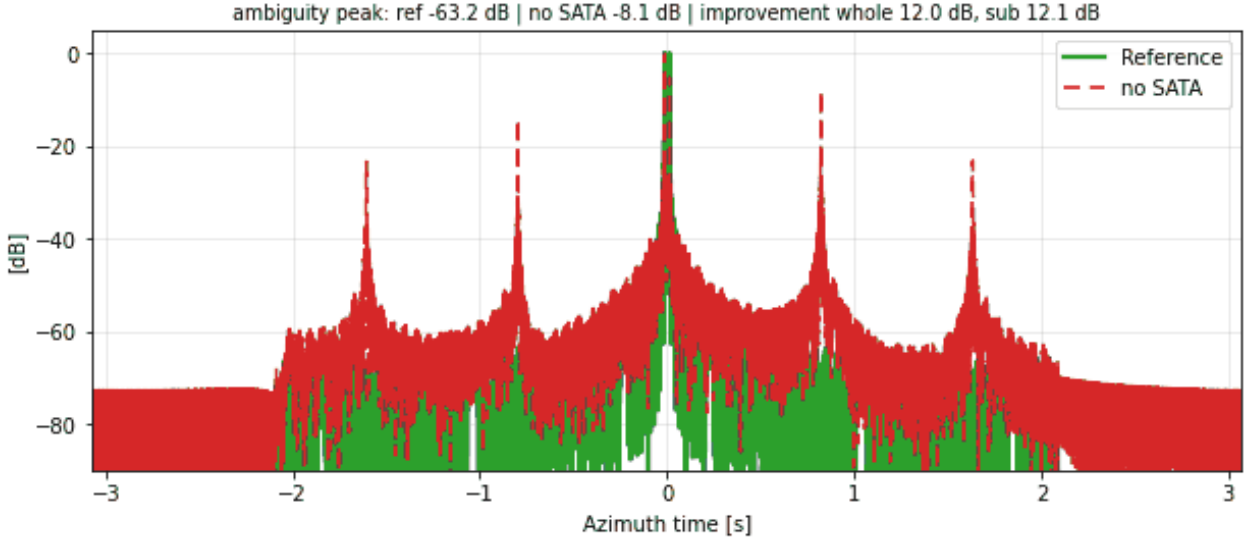



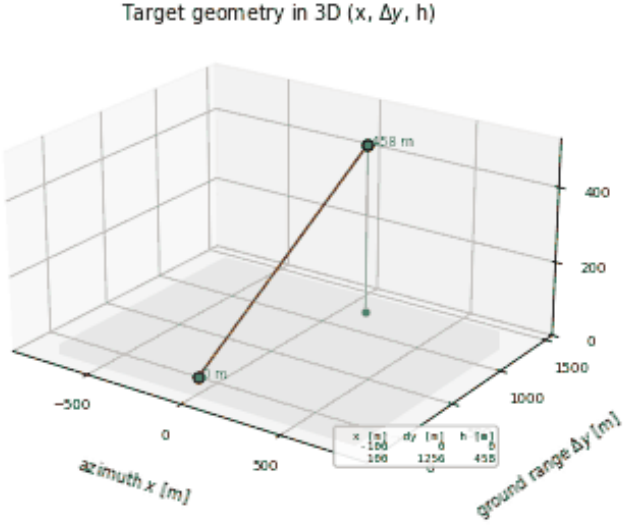



RA-SL-008 | SATA 1D | along-track ramp: N = 2, $\alpha = 10^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

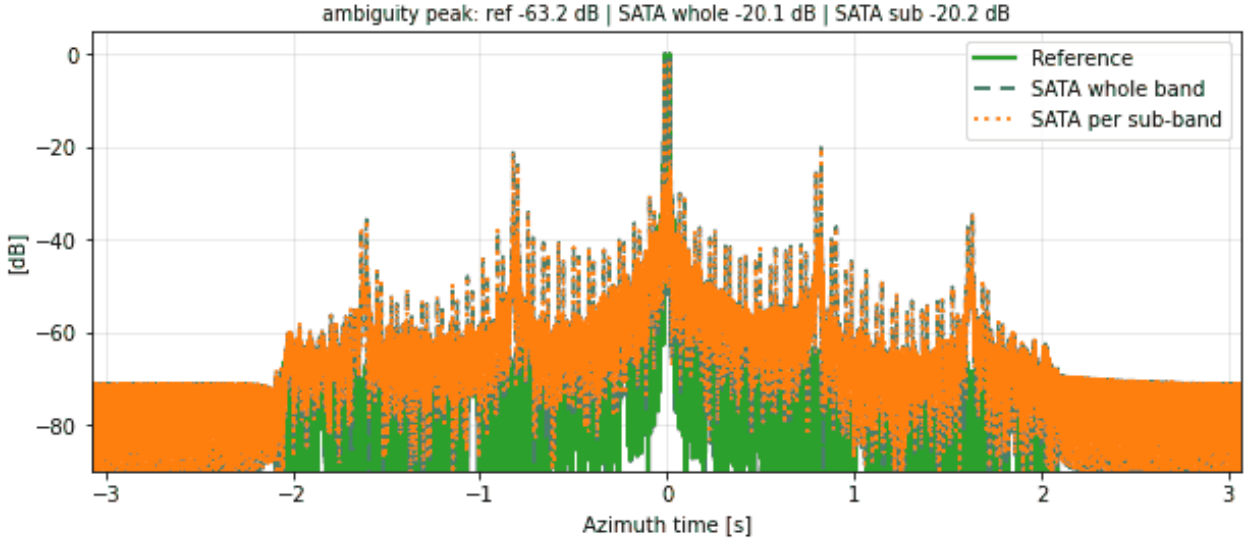


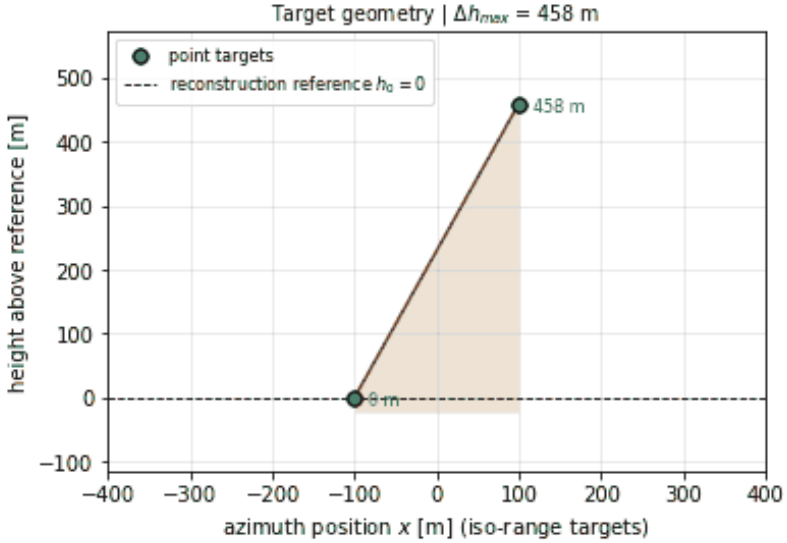



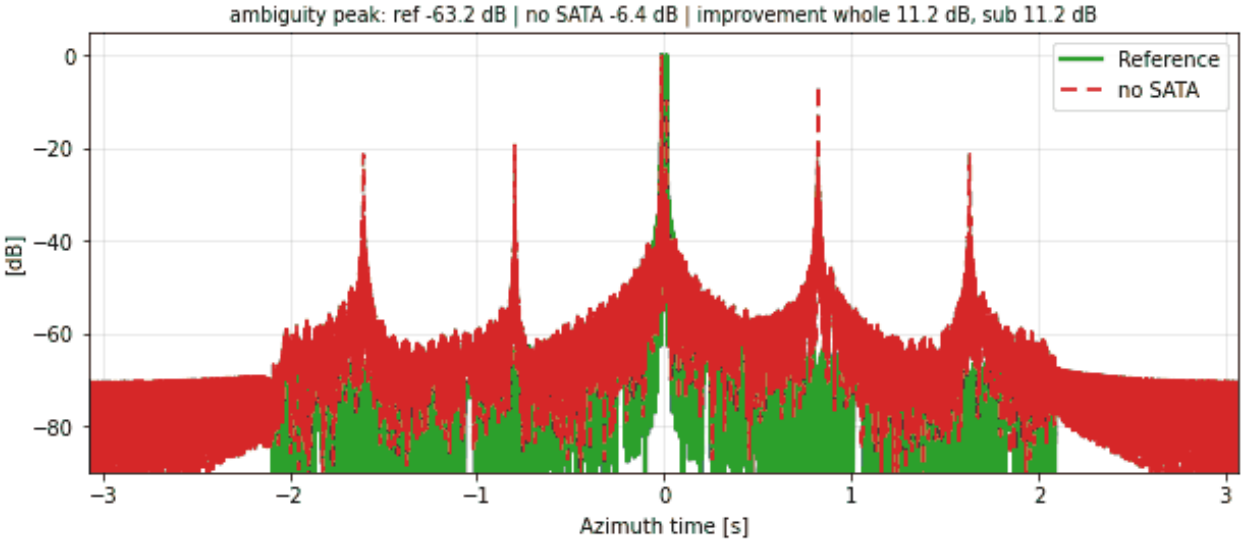



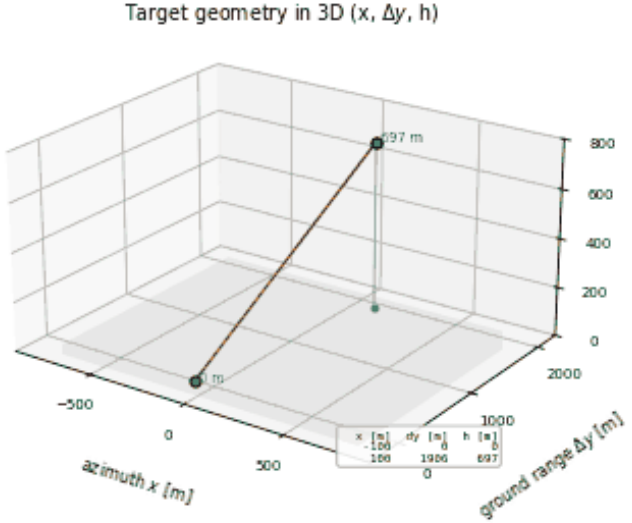



RA-SL-009 | SATA 1D | along-track ramp: N = 2, $\alpha = 15^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

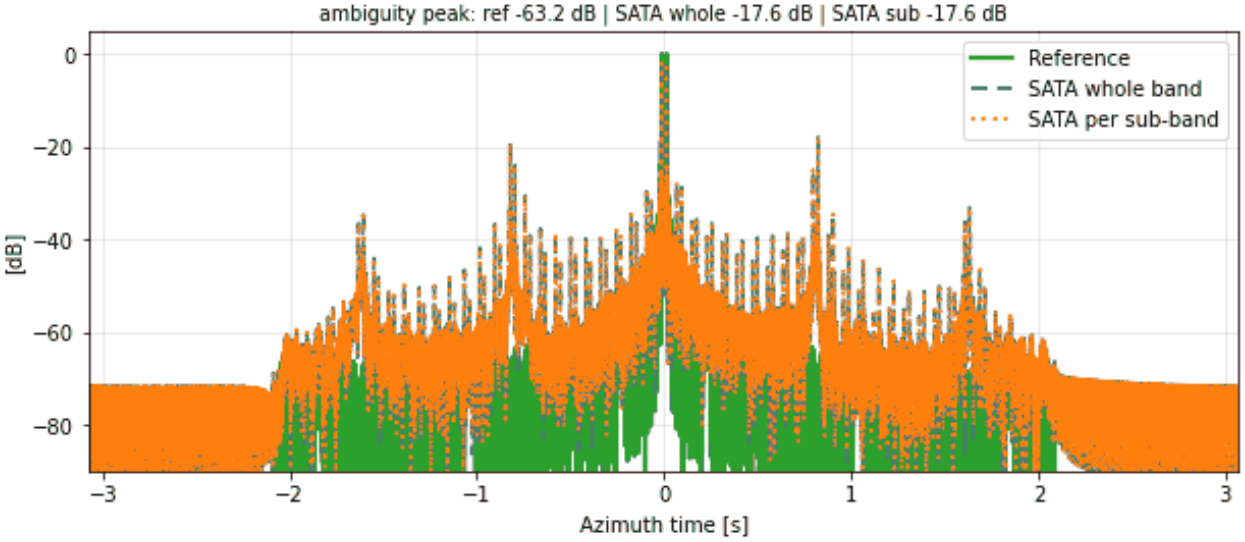


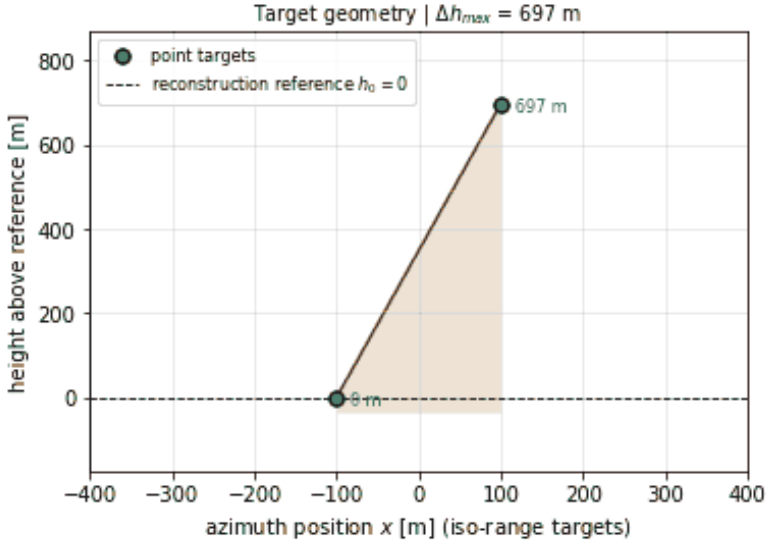



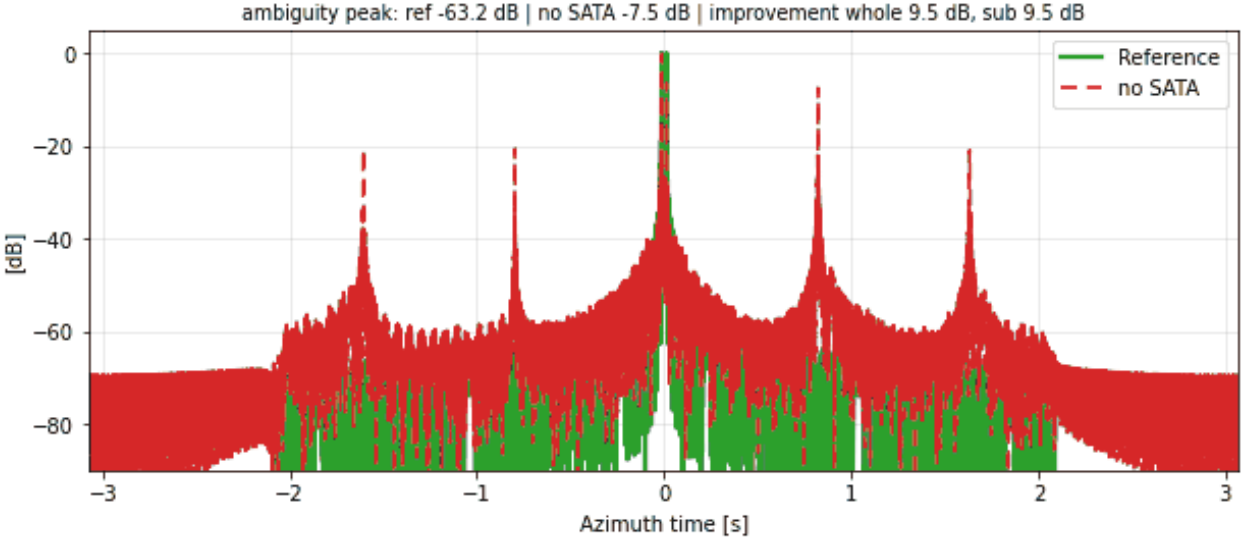



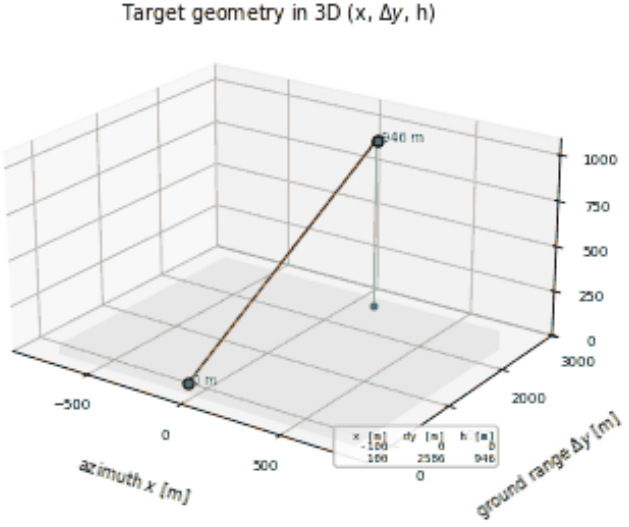



RA-SL-010 | SATA 1D | along-track ramp: N = 2, $\alpha = 20°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

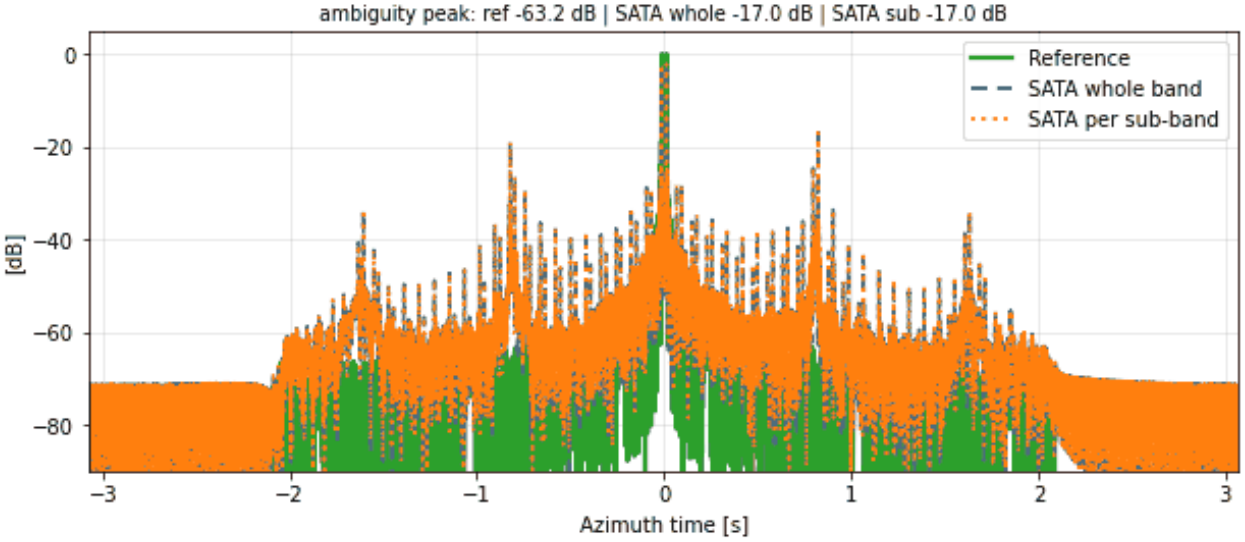


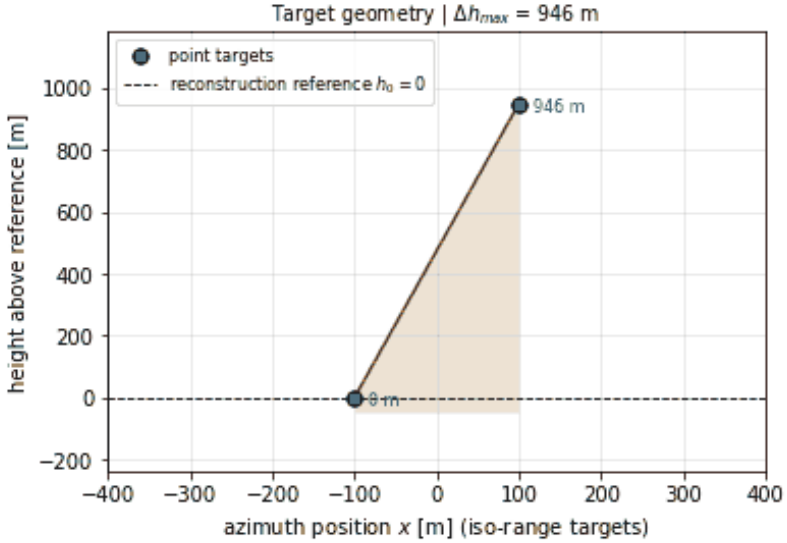



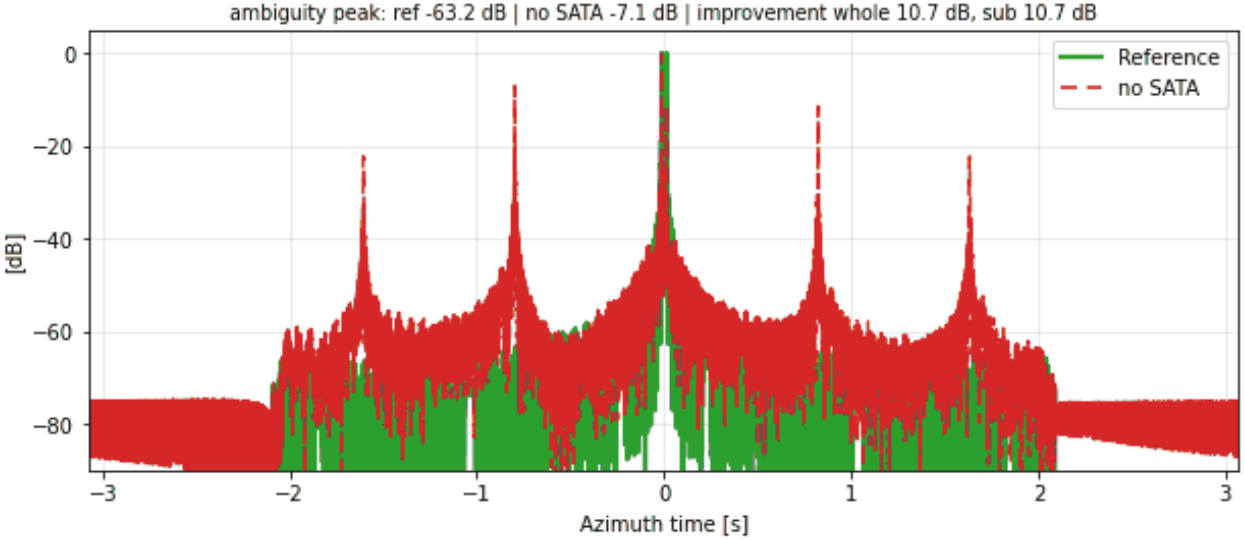



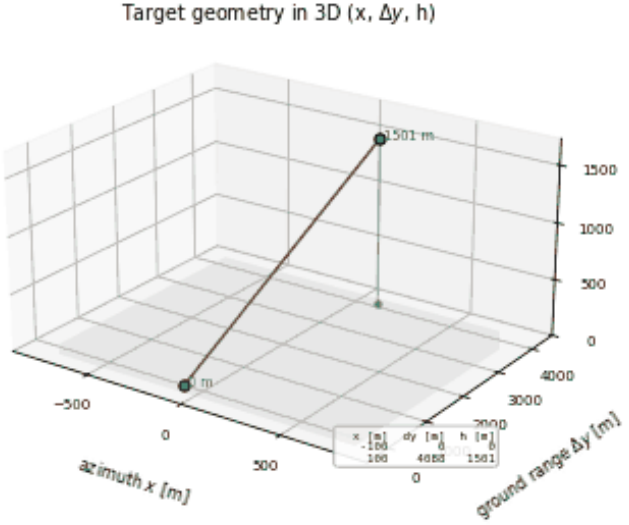



RA-SL-011 | SATA 1D | along-track ramp: N = 2, $\alpha = 30^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

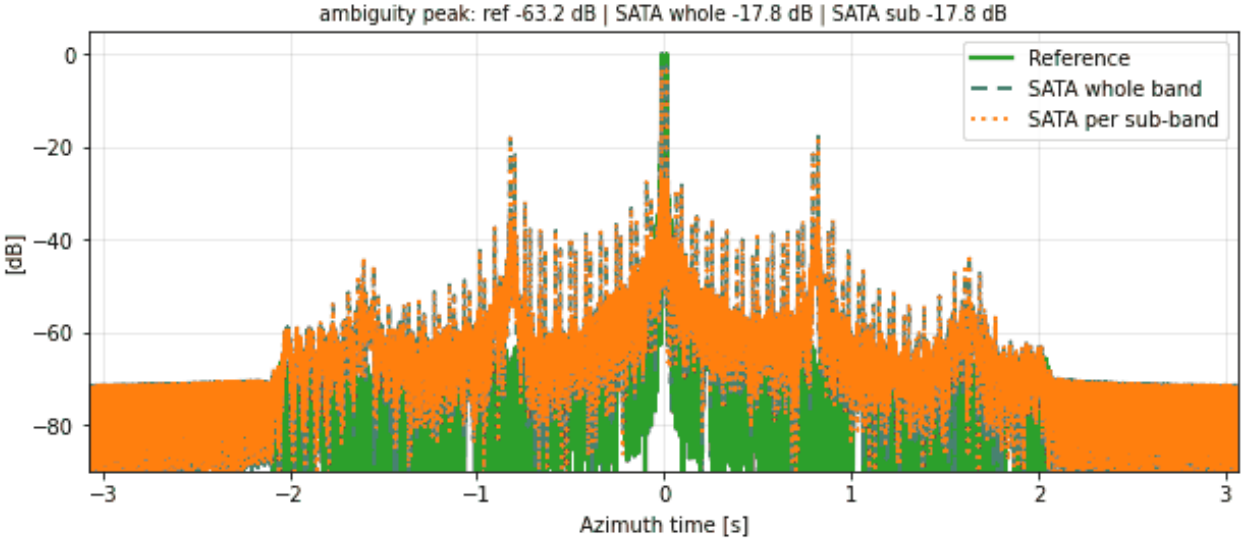


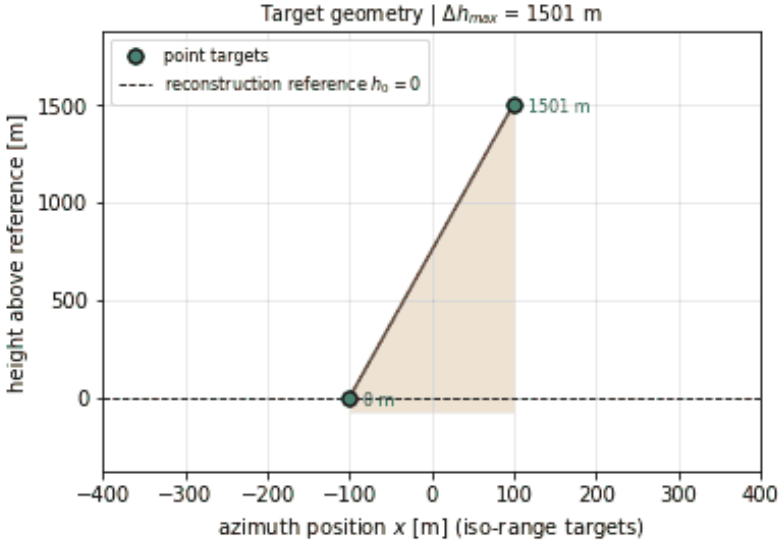



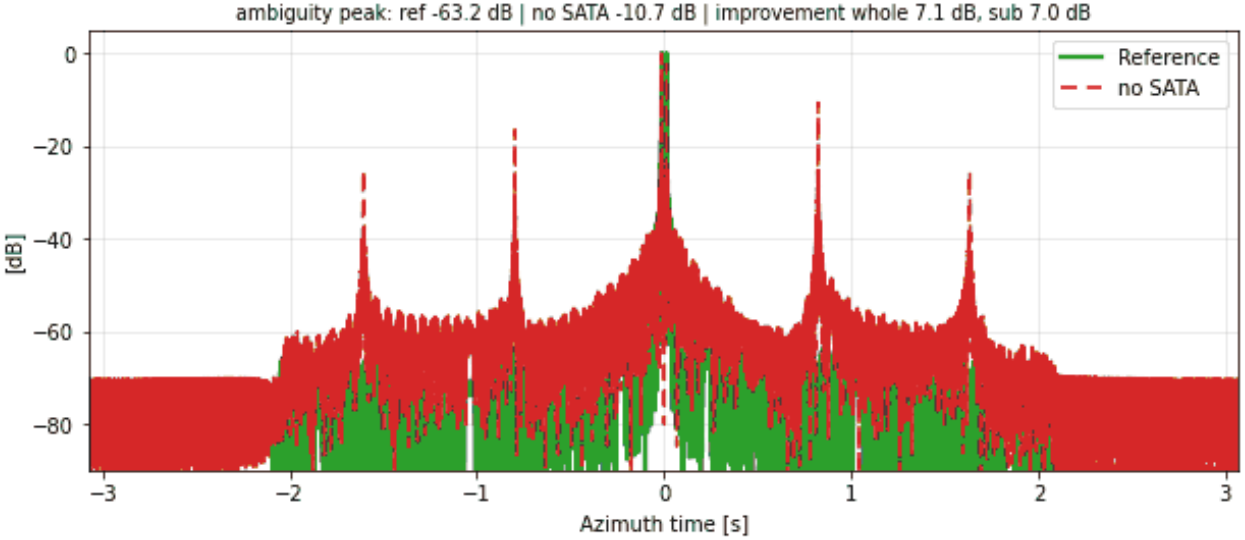



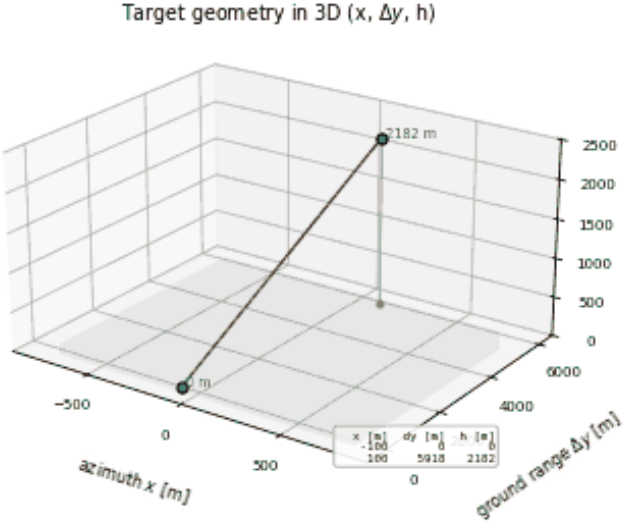



RA-SL-012 | SATA 1D | along-track ramp: N = 2, $\alpha = 40°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

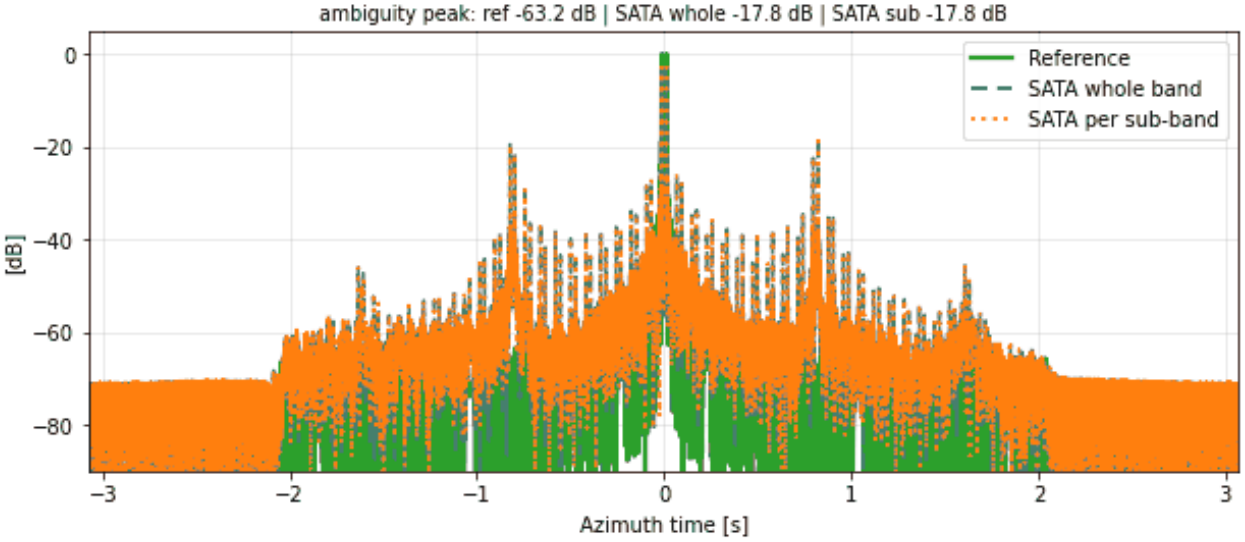


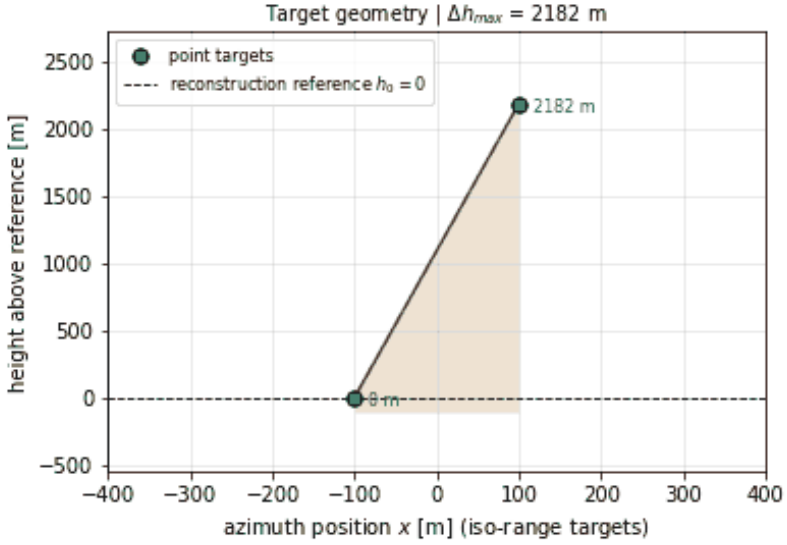



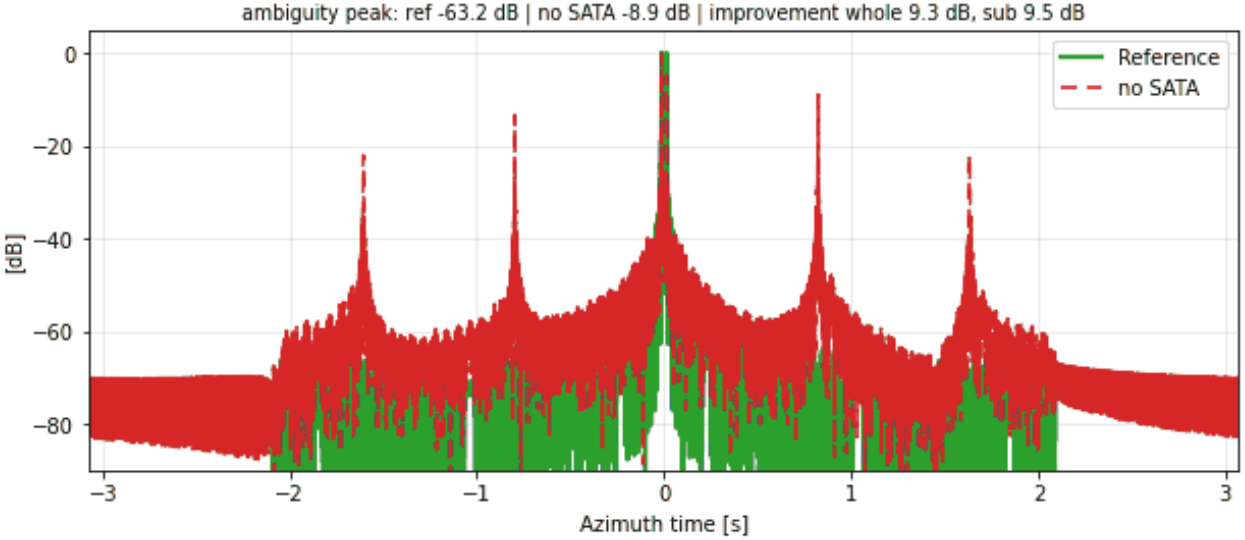



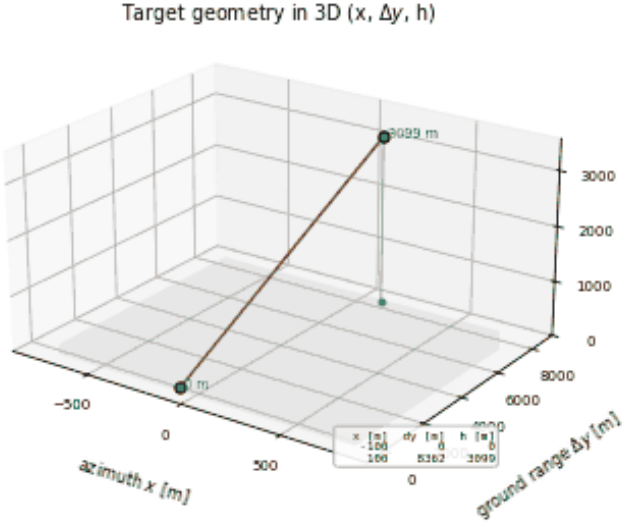



RA-SL-013 | SATA 1D | along-track ramp: N = 2, $\alpha = 50°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

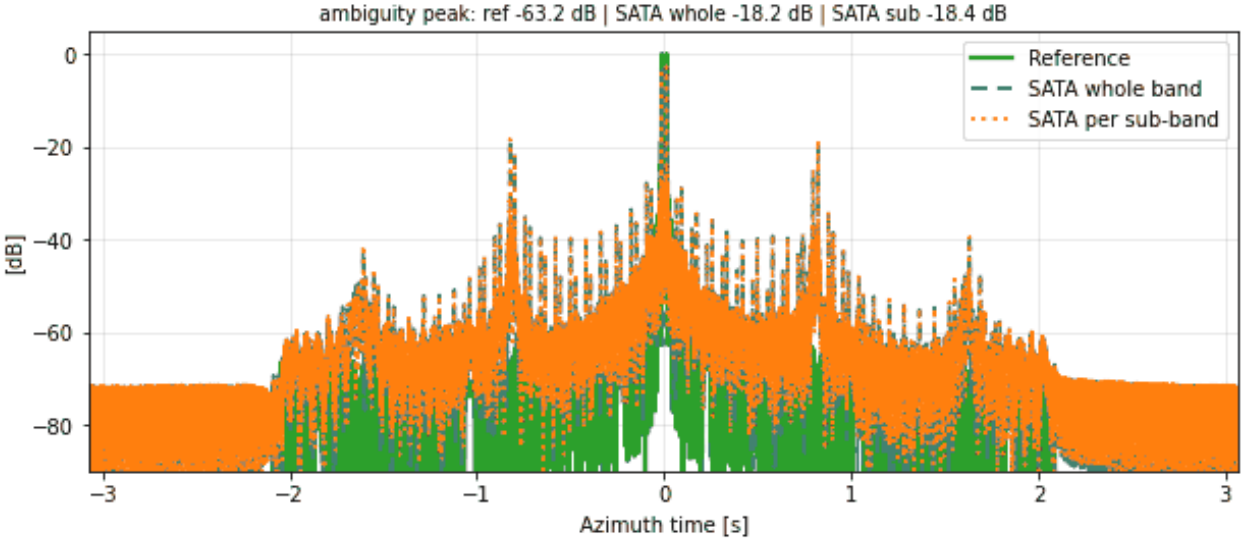


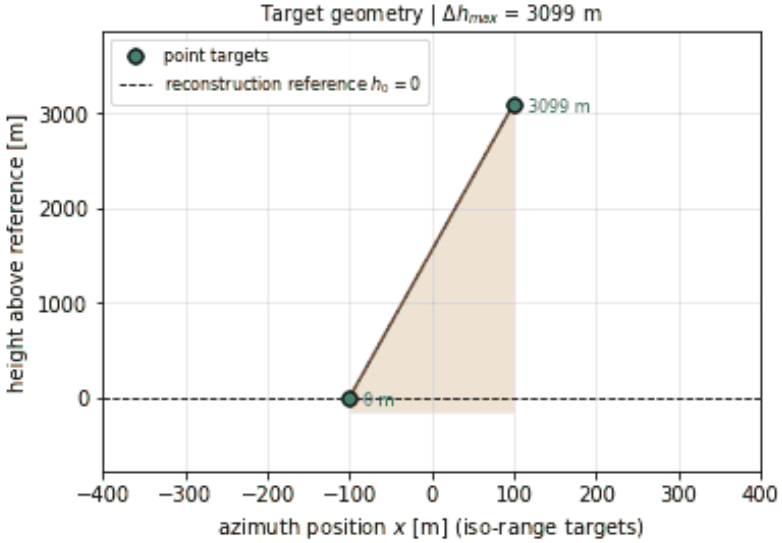



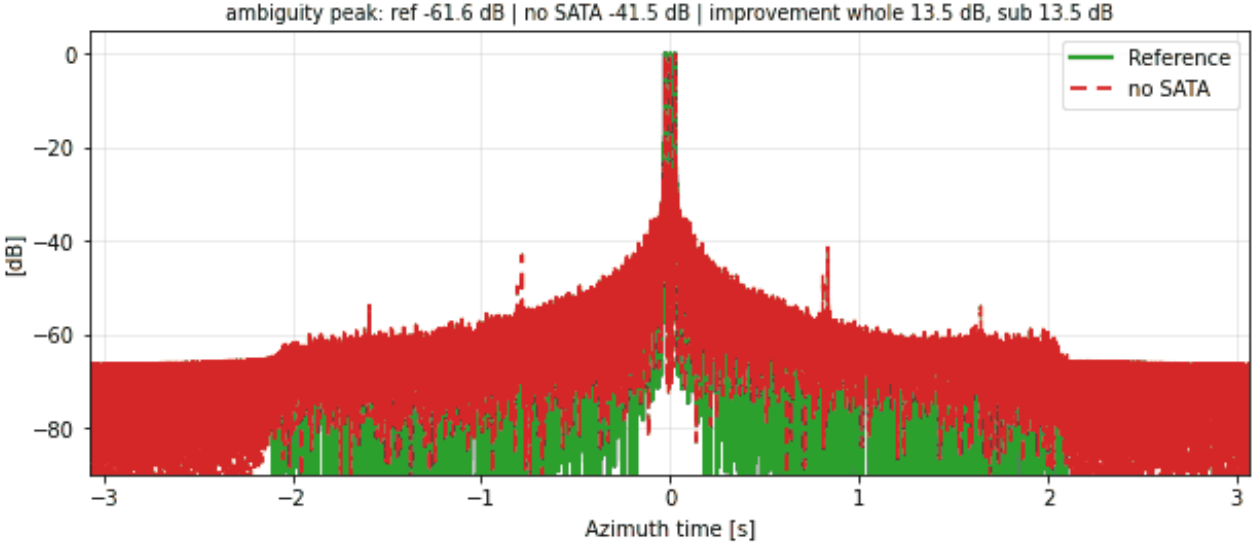



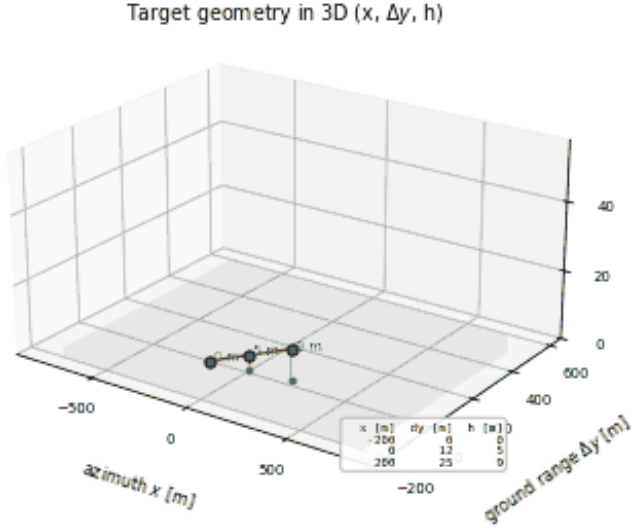



RA-SL-014 | SATA 1D | along-track ramp: N = 3, $\alpha = 0.1^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

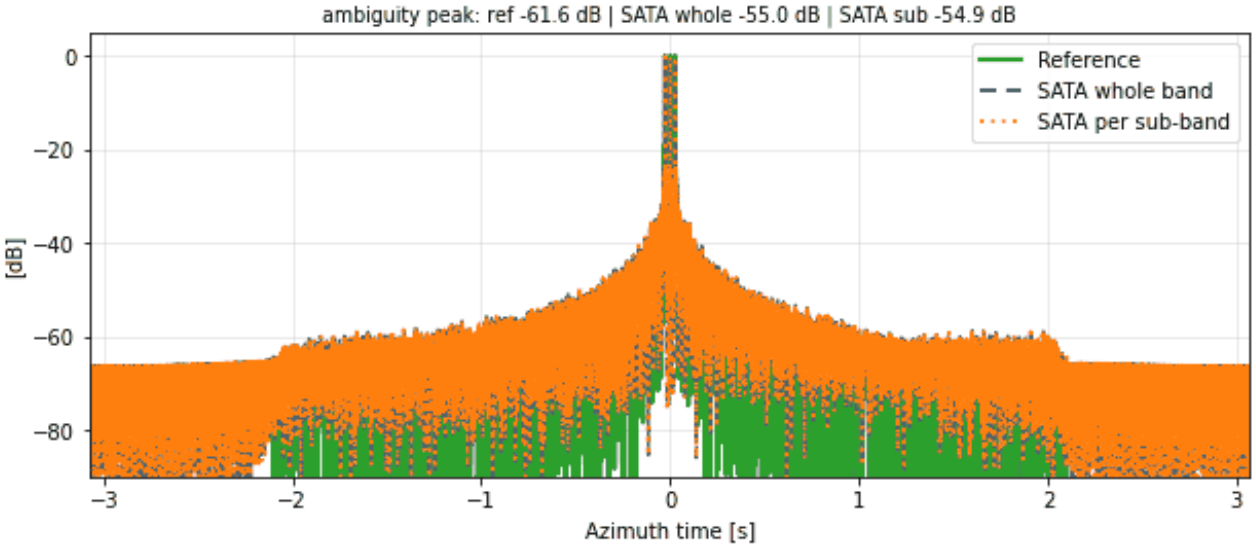

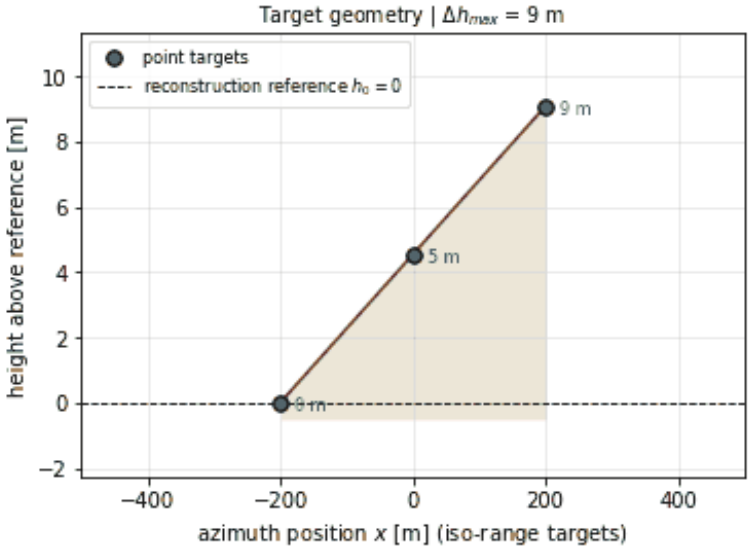



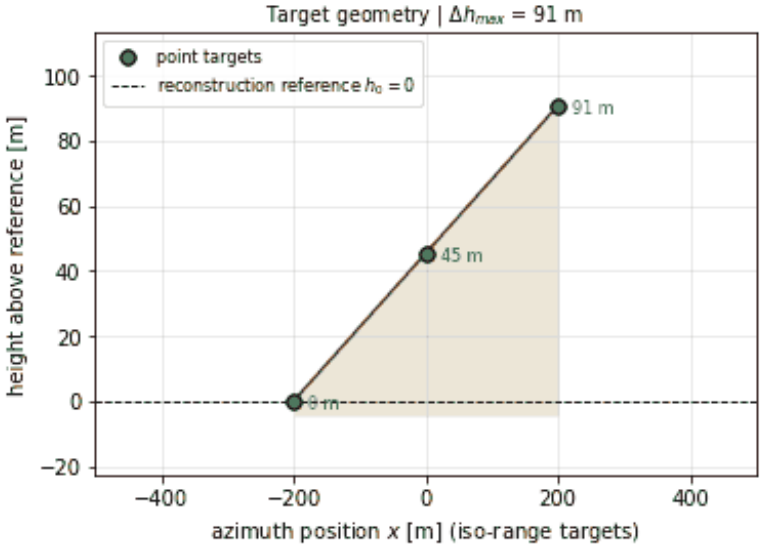



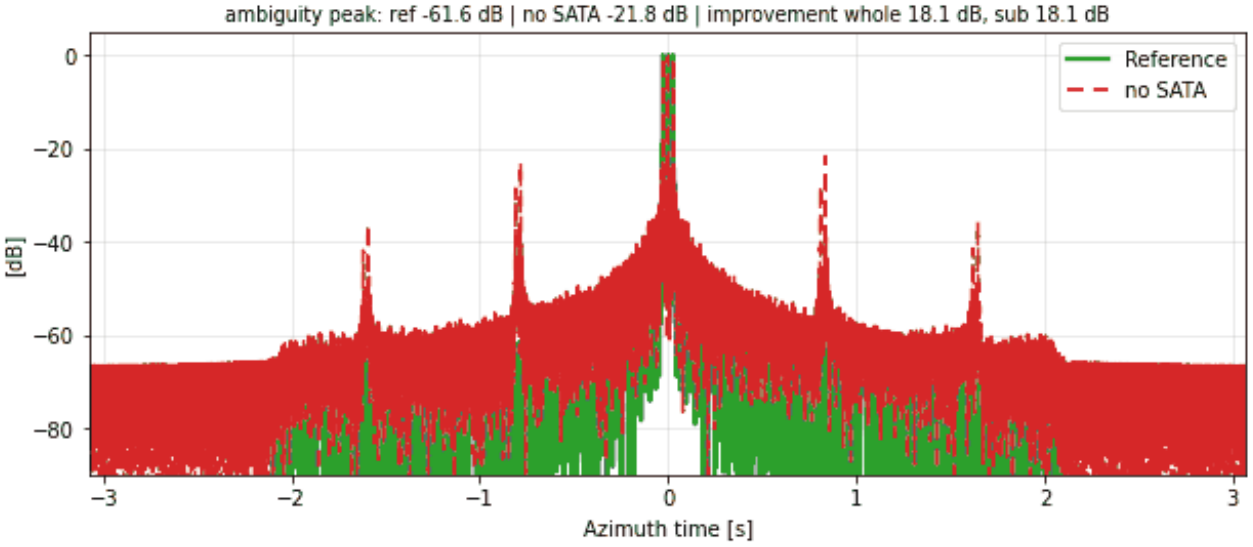



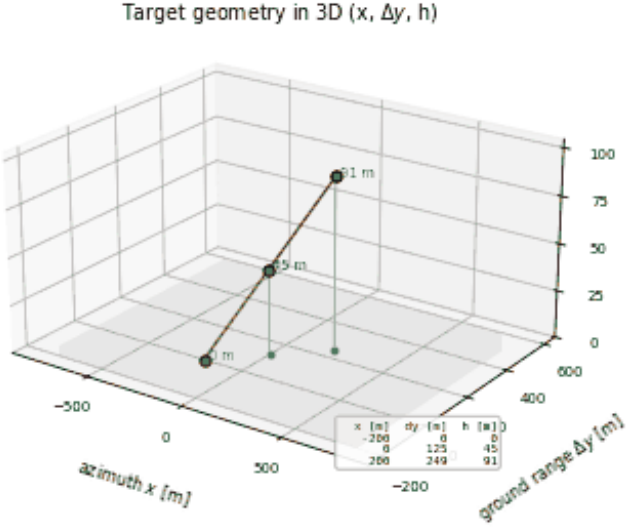
RA-SL-015 | SATA 1D | along-track ramp: N = 3, $\alpha = 1^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

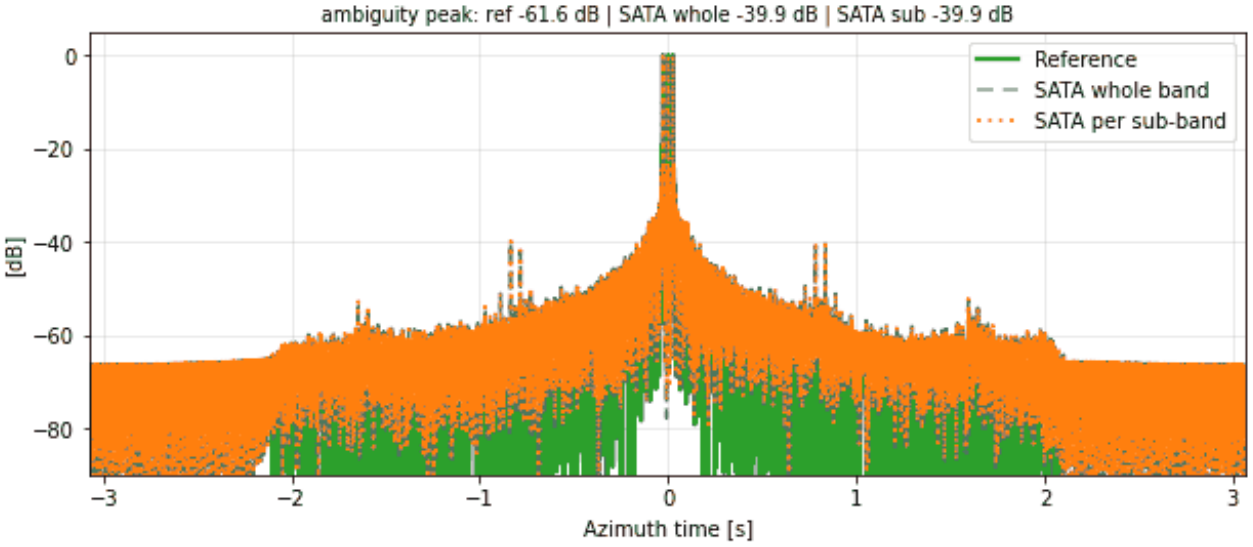





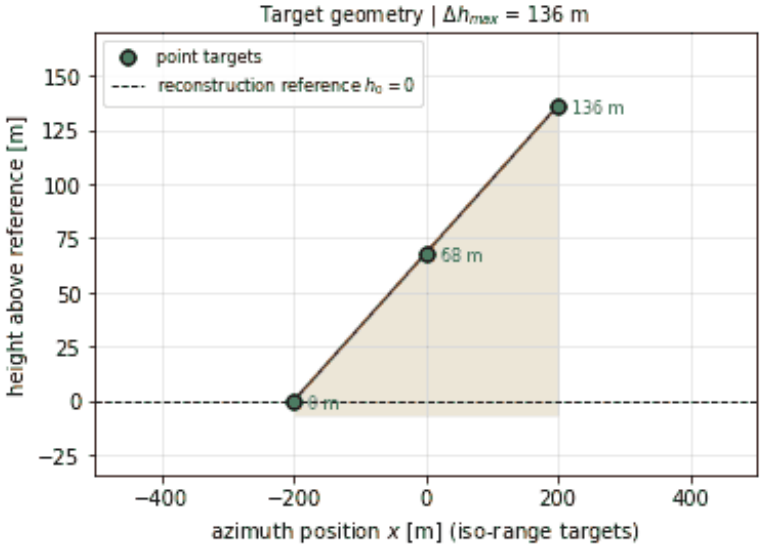



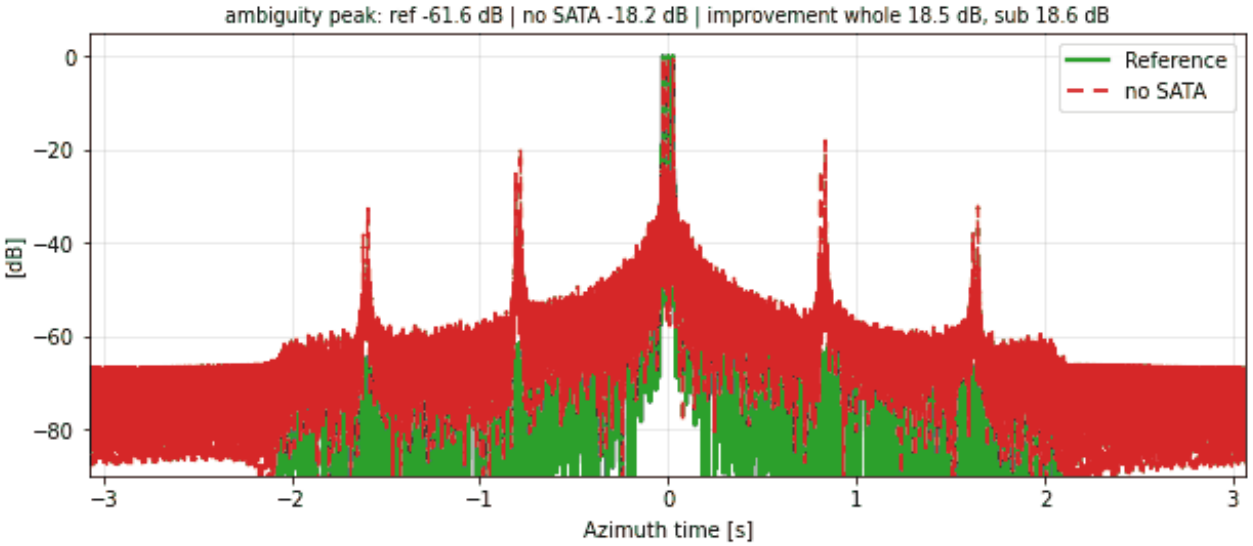



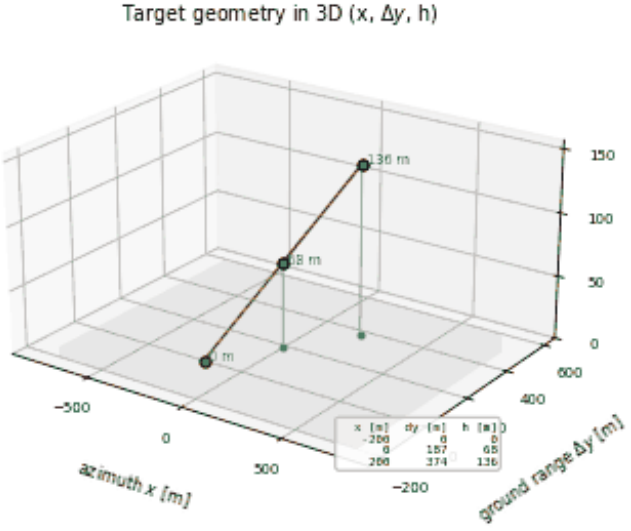
RA-SL-016 | SATA 1D | along-track ramp: N = 3, $\alpha = 1.5°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

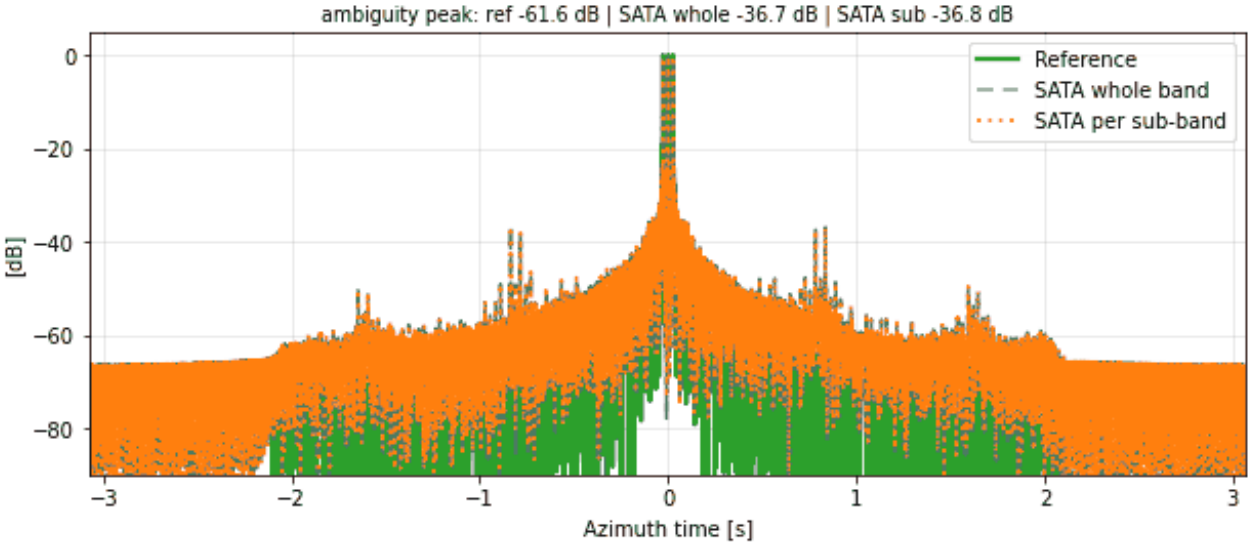





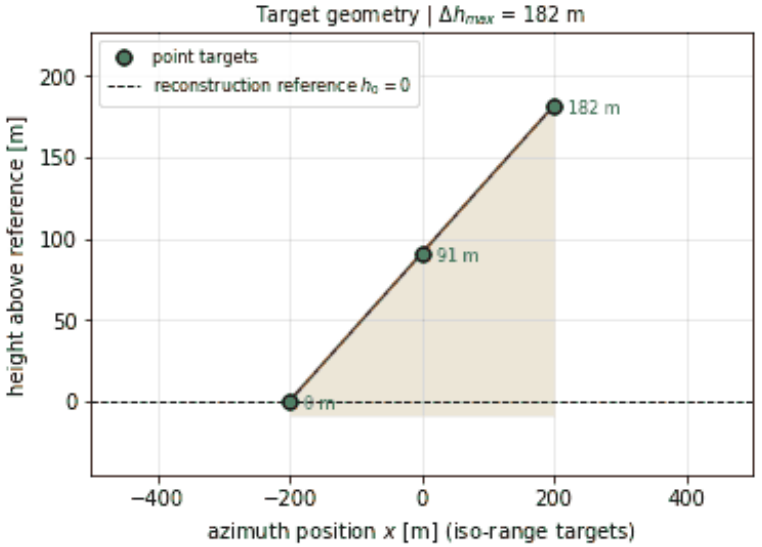



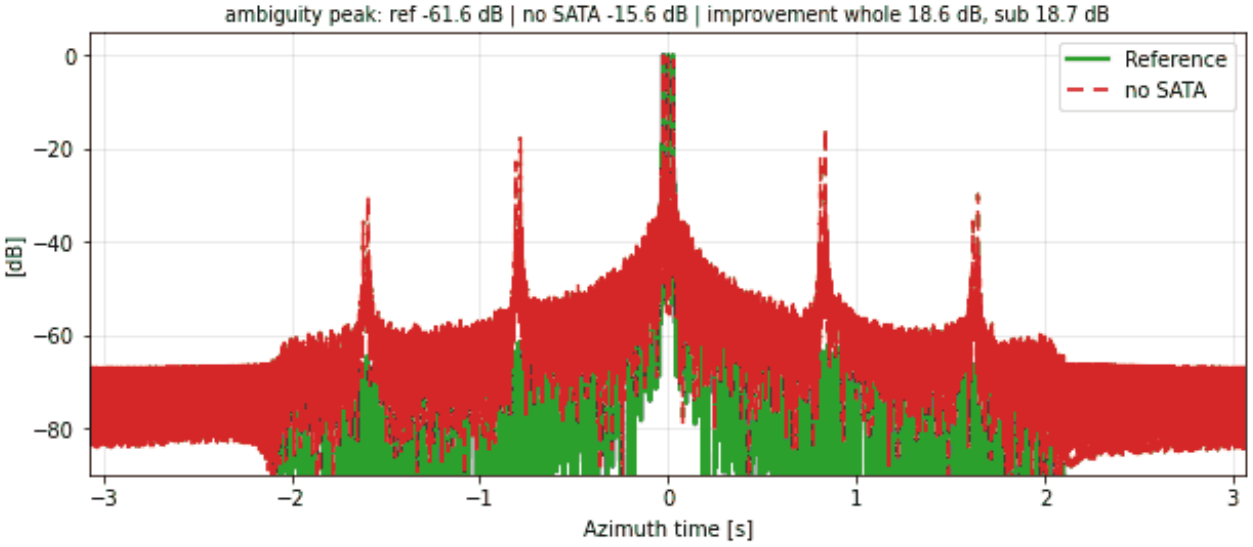



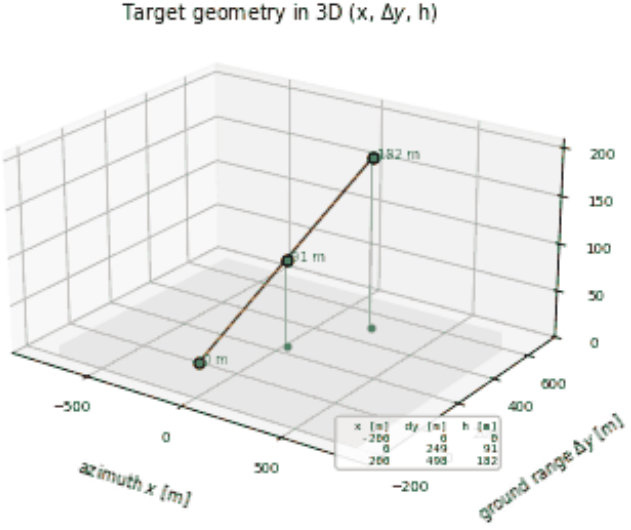
RA-SL-017 | SATA 1D | along-track ramp: N = 3, $\alpha = 2^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

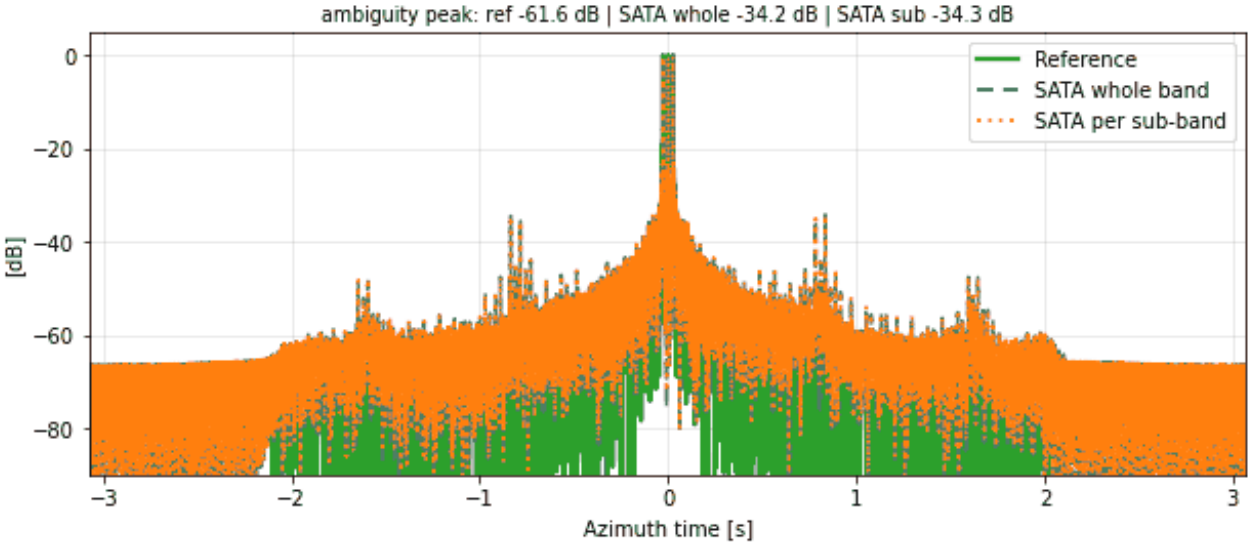





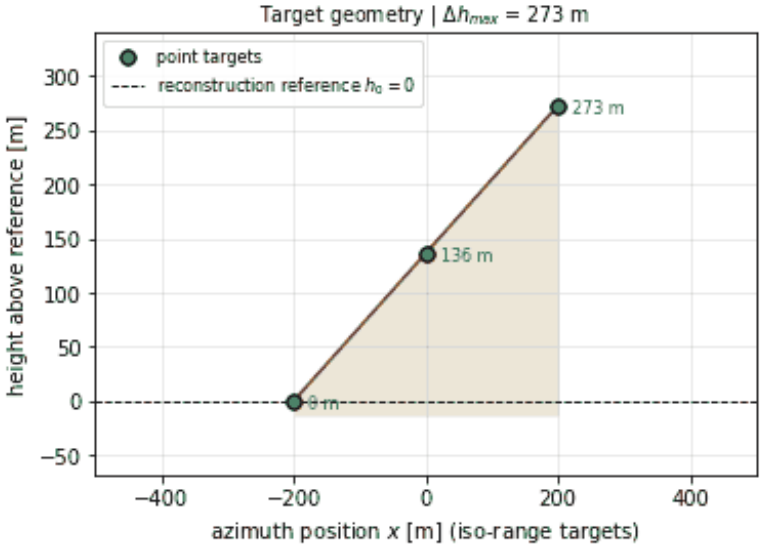



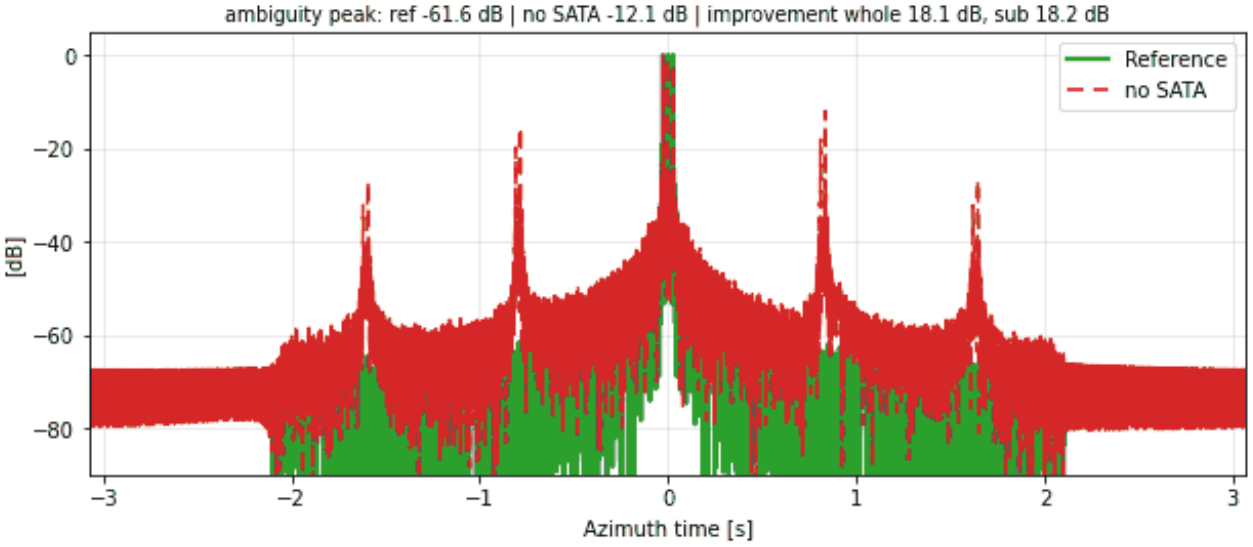



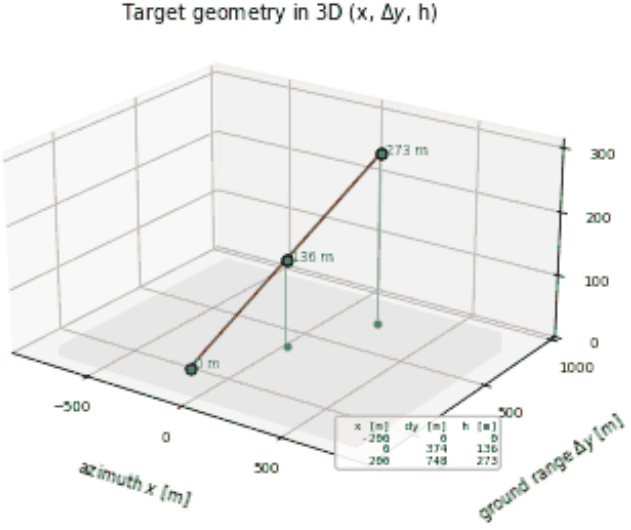
RA-SL-018 | SATA 1D | along-track ramp: N = 3, $\alpha = 3^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

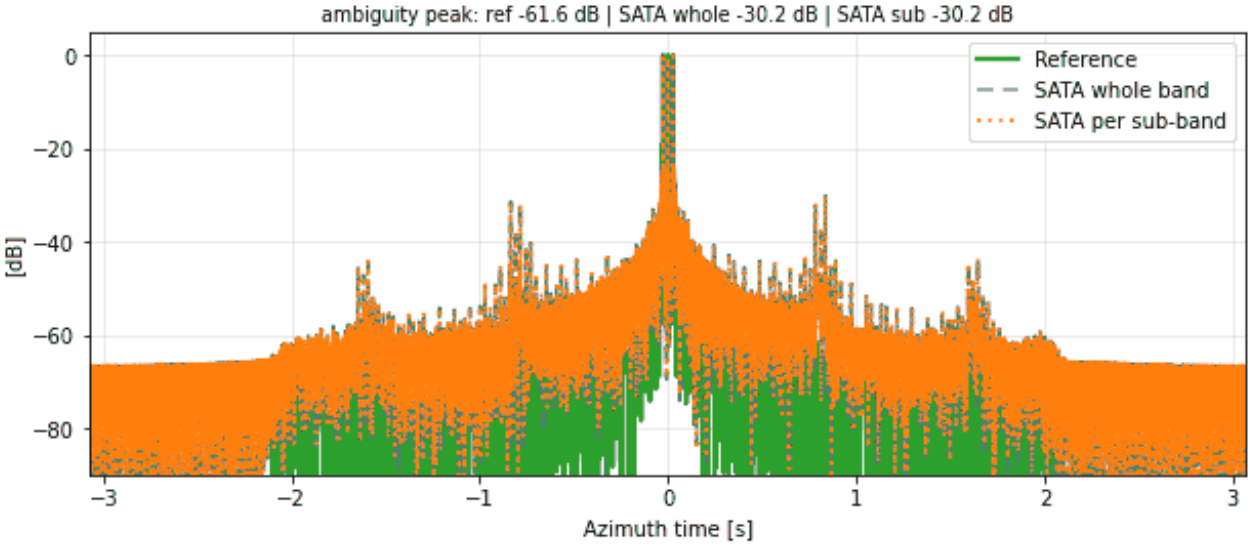





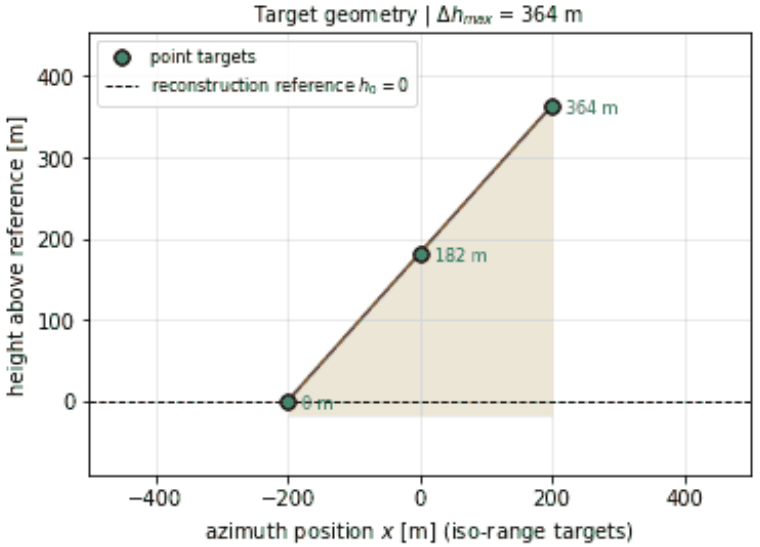



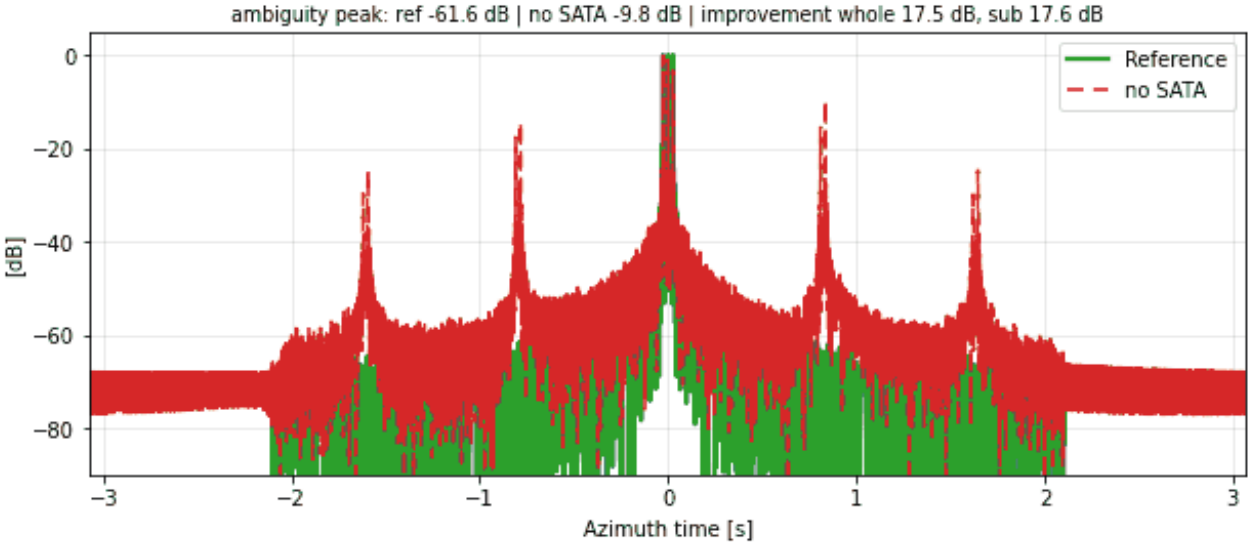



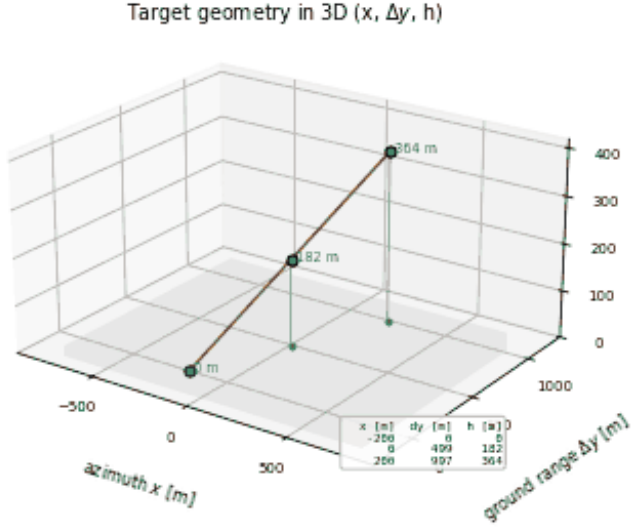
RA-SL-019 | SATA 1D | along-track ramp: N = 3, $\alpha = 4°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

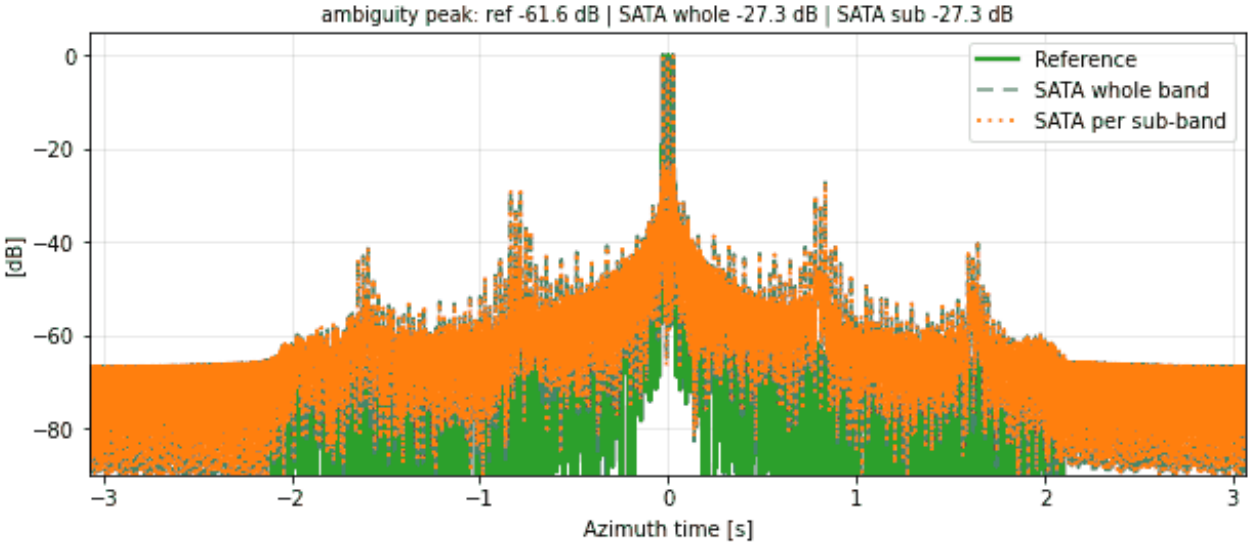





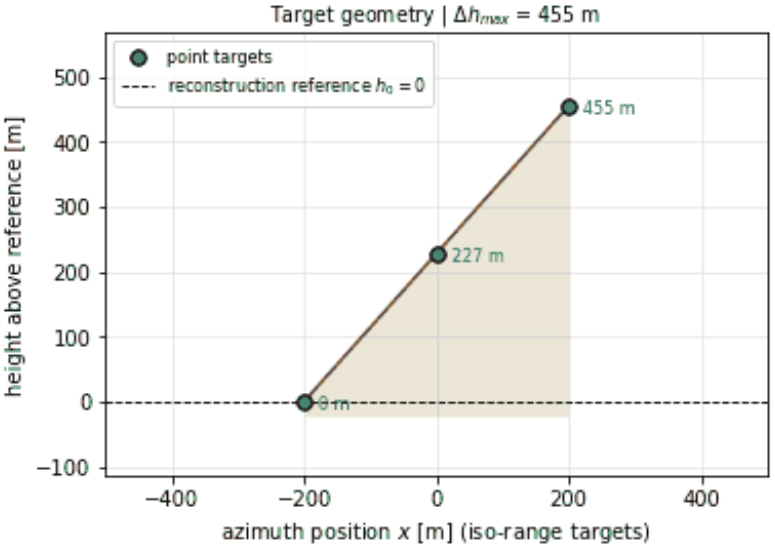



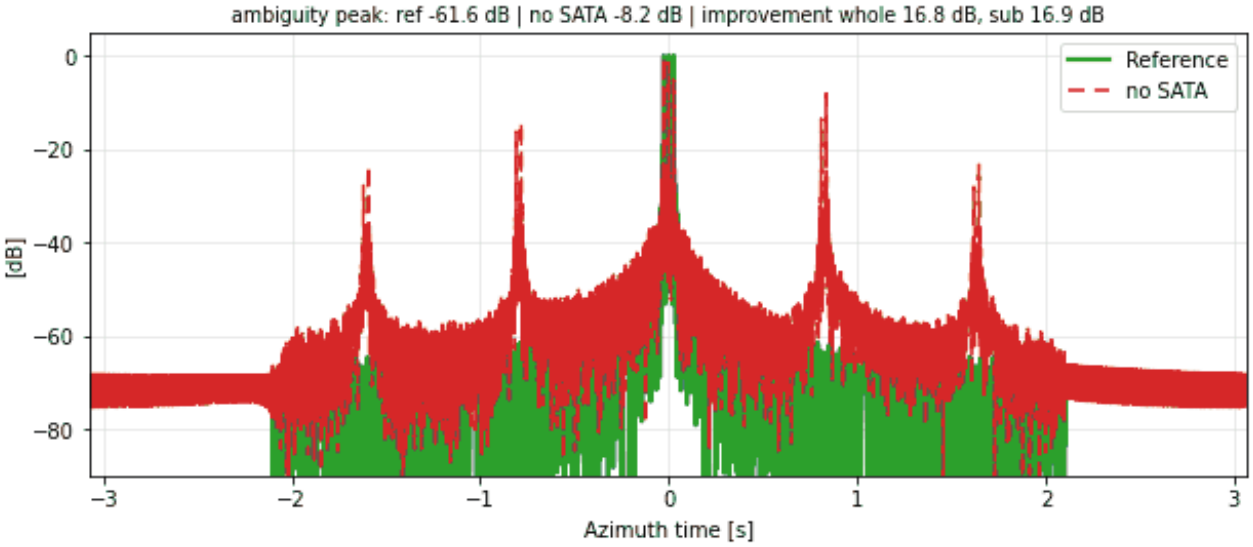



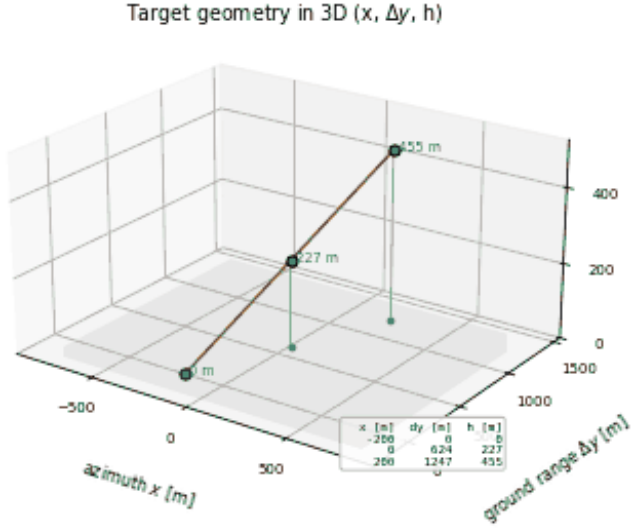
RA-SL-020 | SATA 1D | along-track ramp: N = 3, $\alpha = 5^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

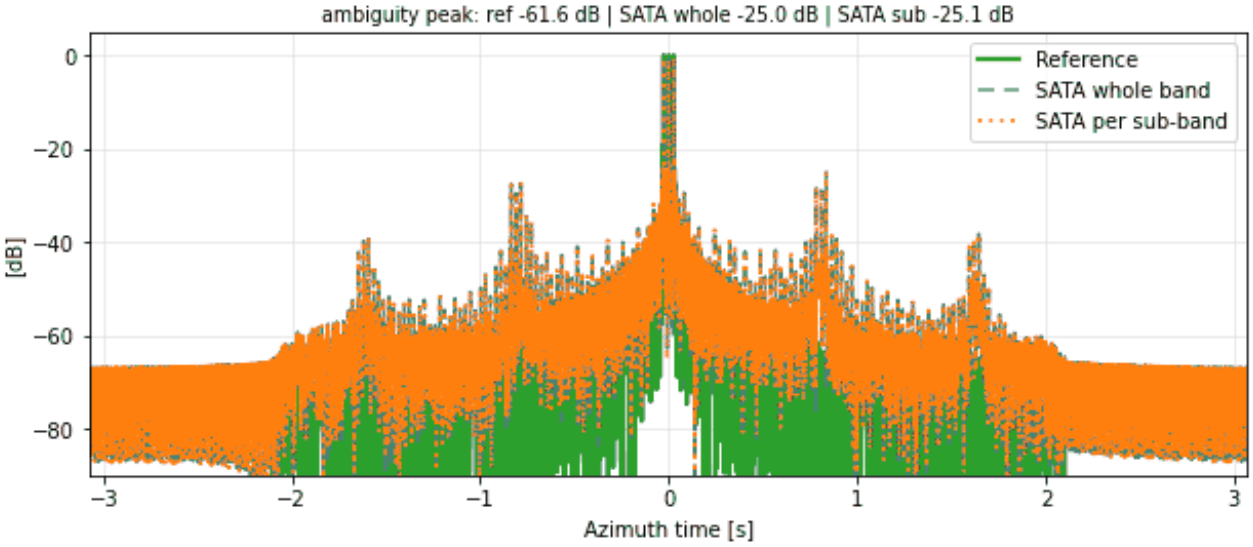






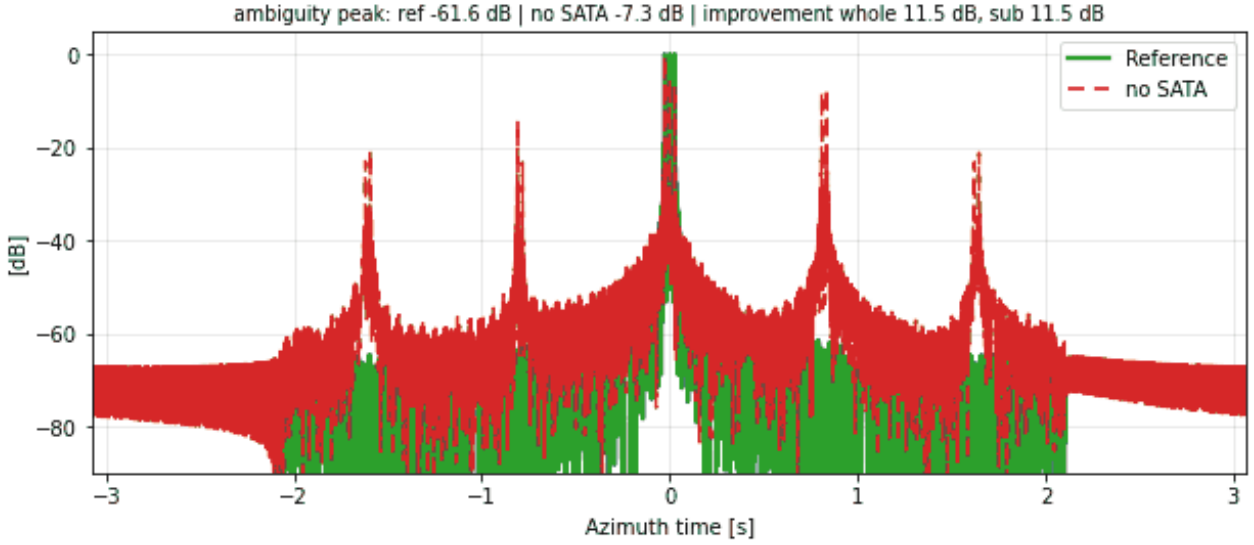



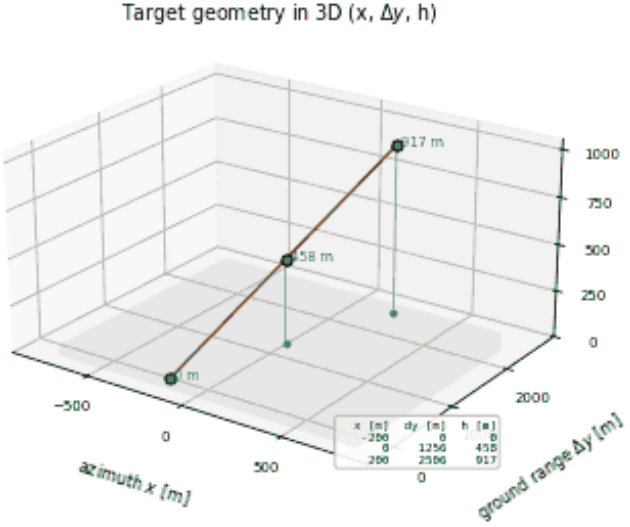



RA-SL-021 | SATA 1D | along-track ramp: N = 3, $\alpha = 10°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a = 1235$ Hz | $\Delta b_{at} = 7.69$ m (DPCA)

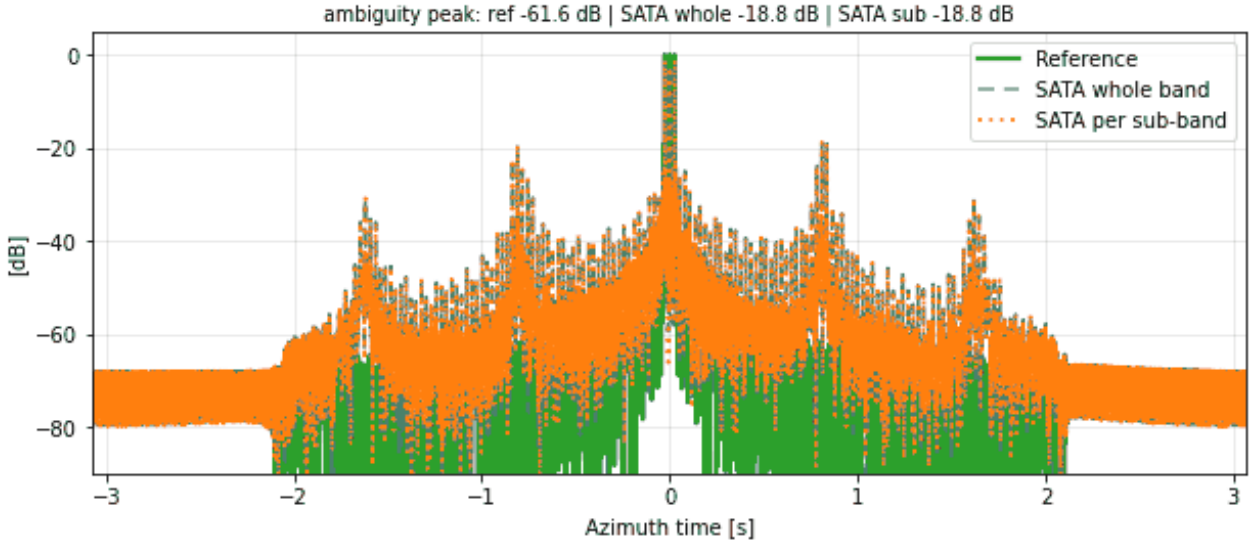

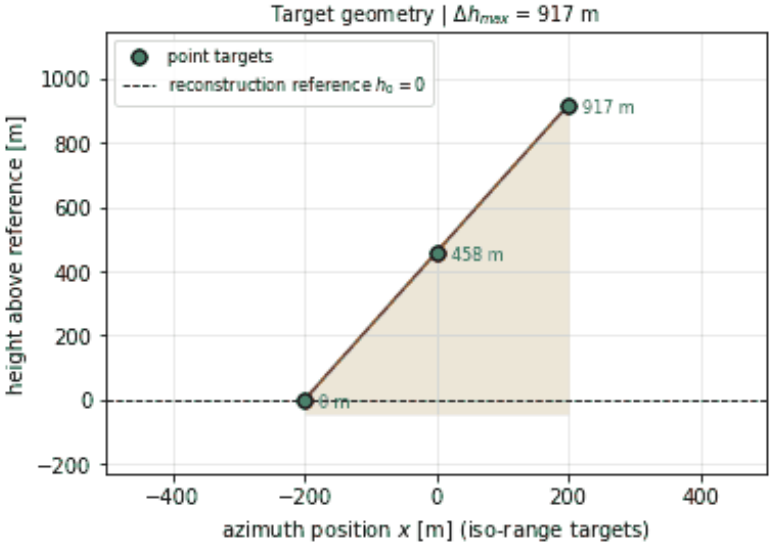



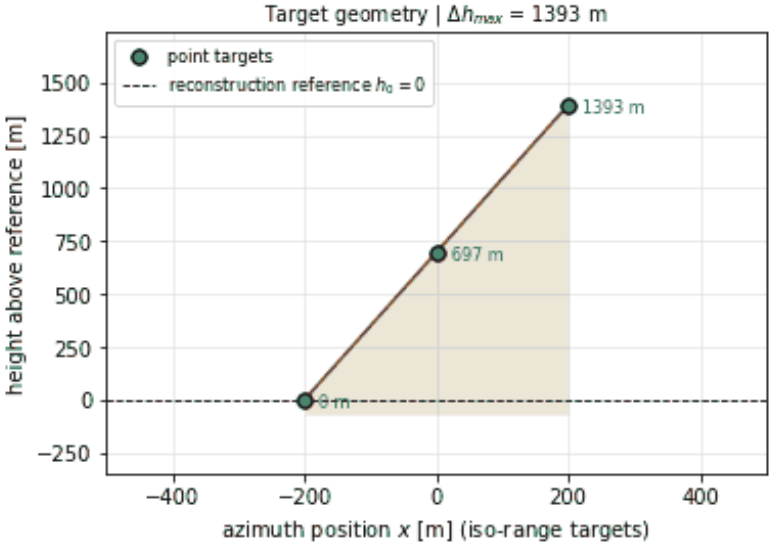



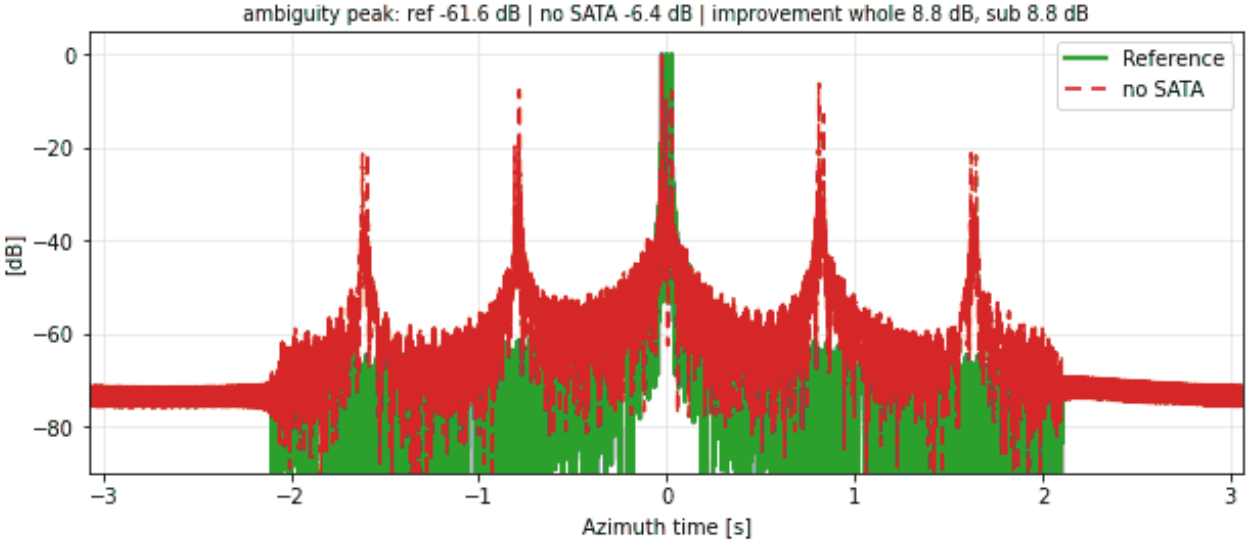



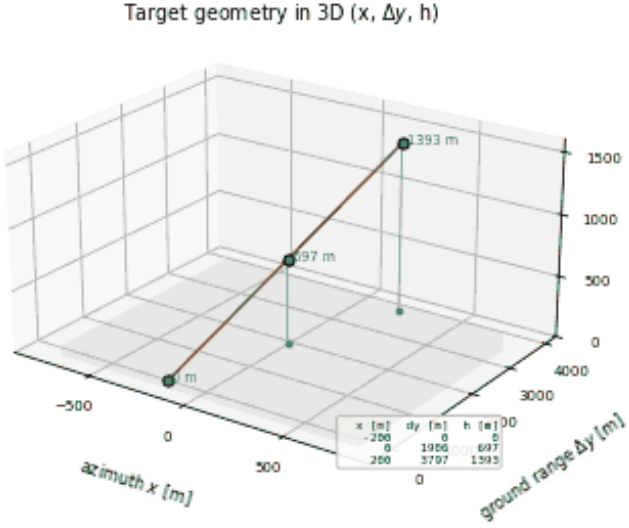
RA-SL-022 | SATA 1D | along-track ramp: N = 3, $\alpha = 15^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a = 1235$ Hz | $\Delta b_{at} = 7.69$ m (DPCA)

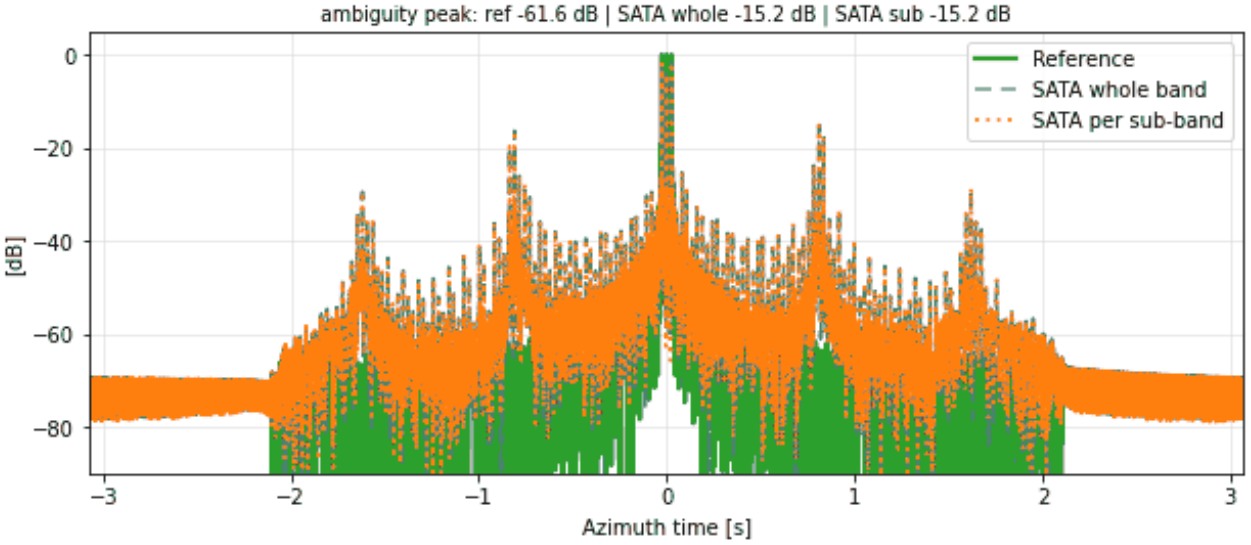





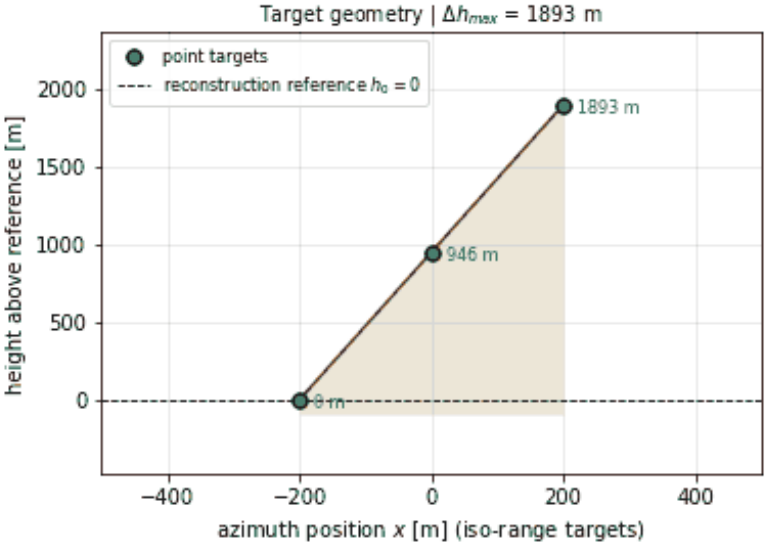



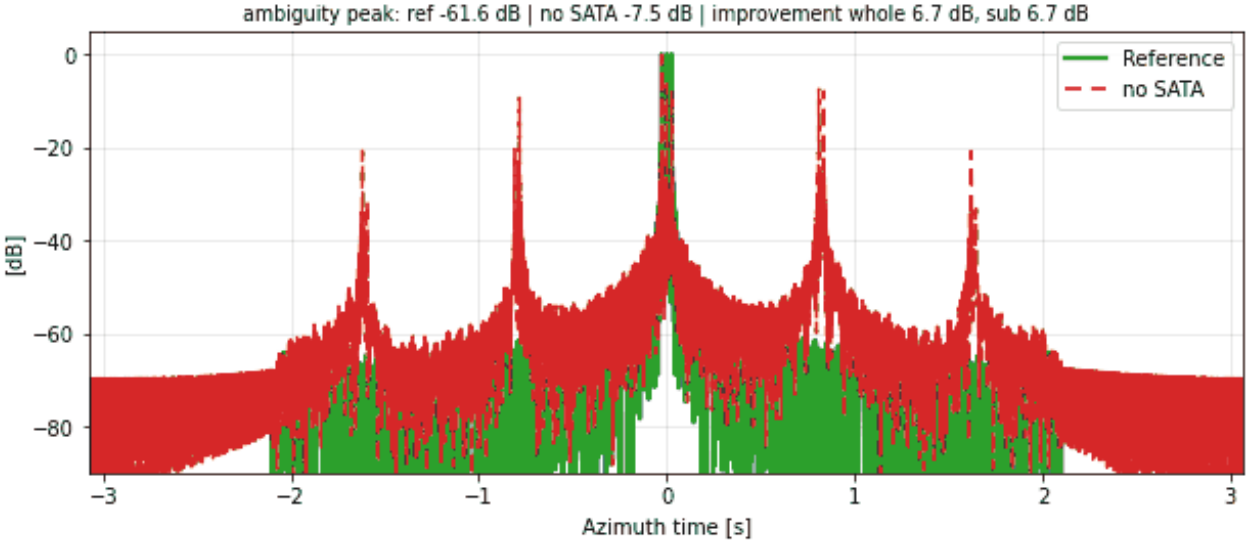



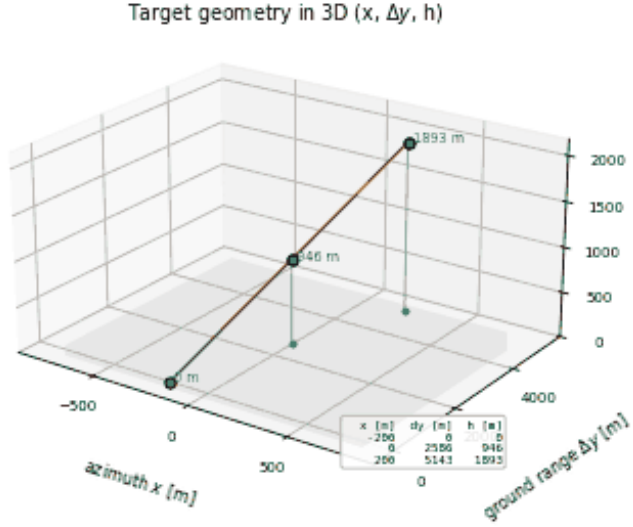
RA-SL-023 | SATA 1D | along-track ramp: N = 3, $\alpha = 20°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

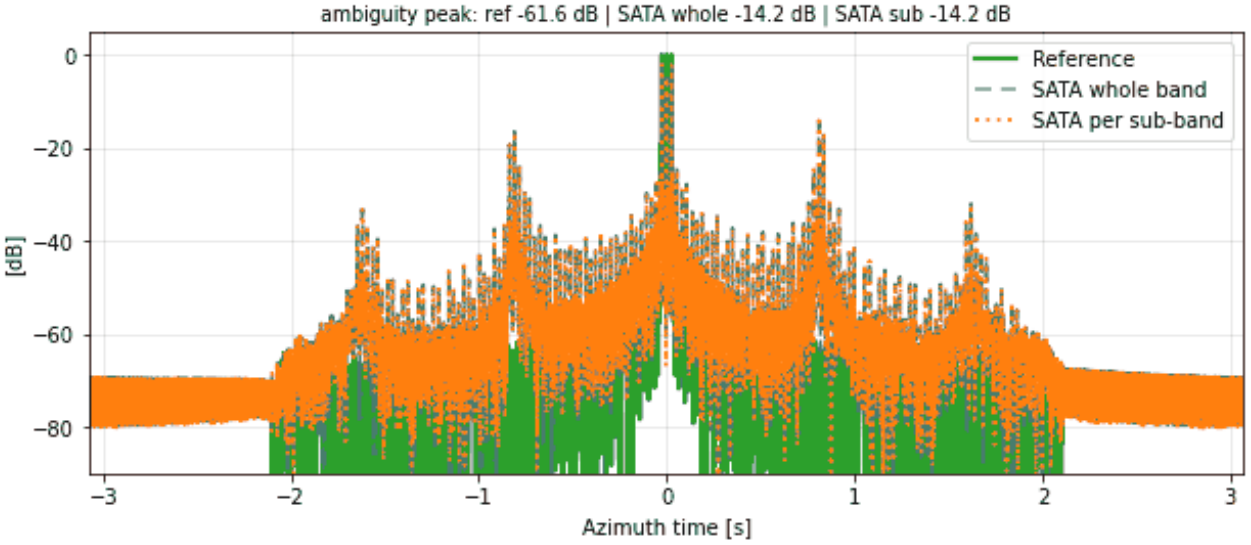





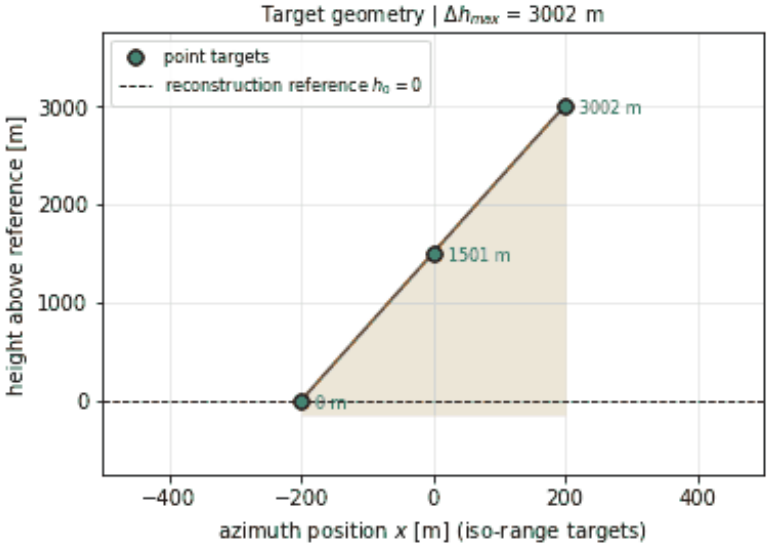



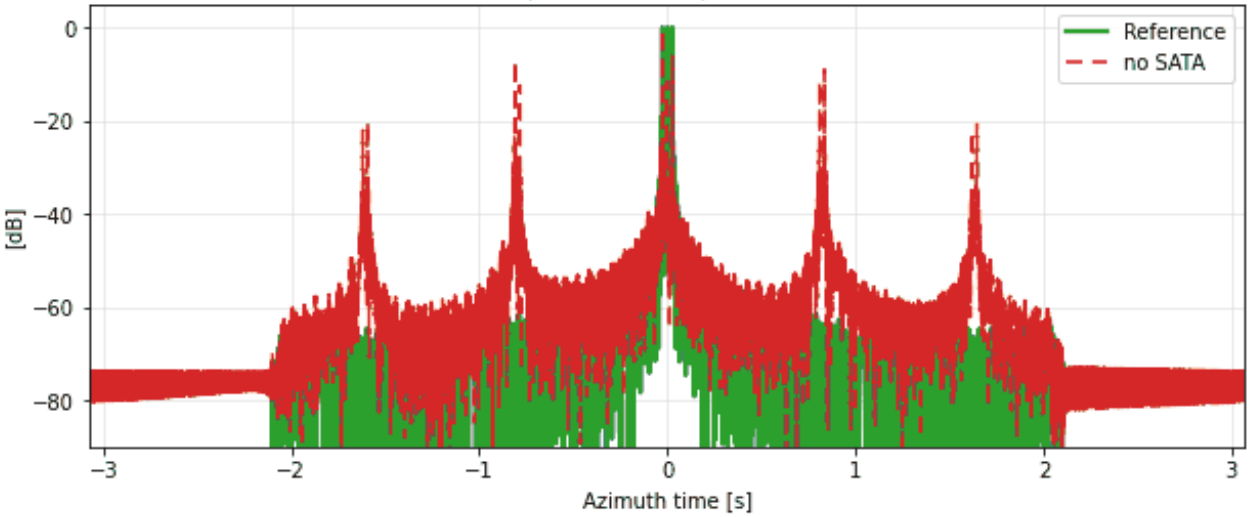



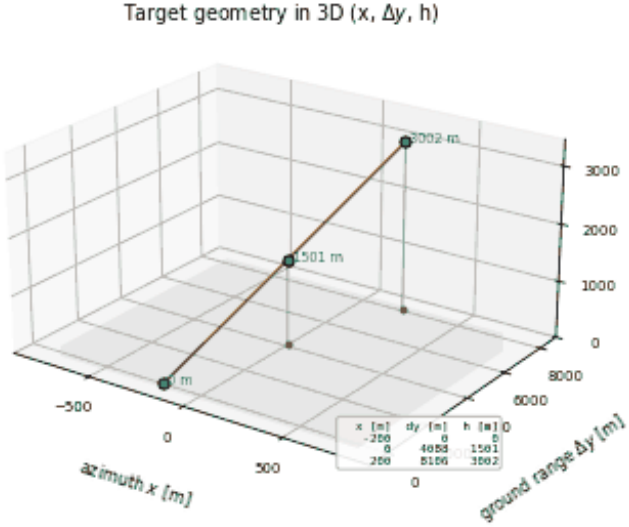
RA-SL-024 | SATA 1D | along-track ramp: N = 3, $\alpha = 30°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

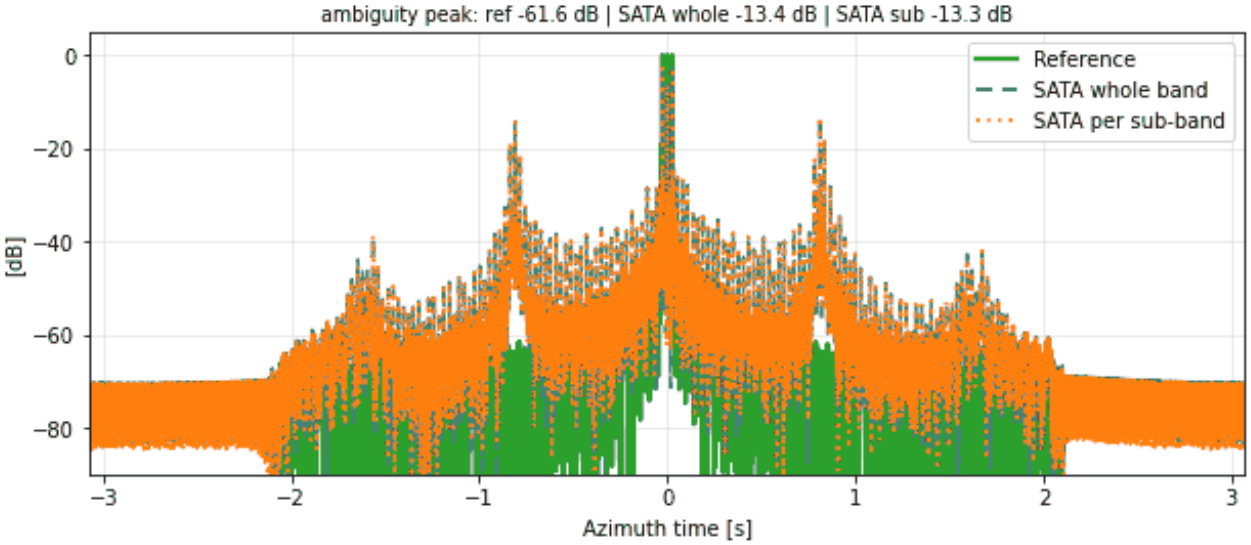





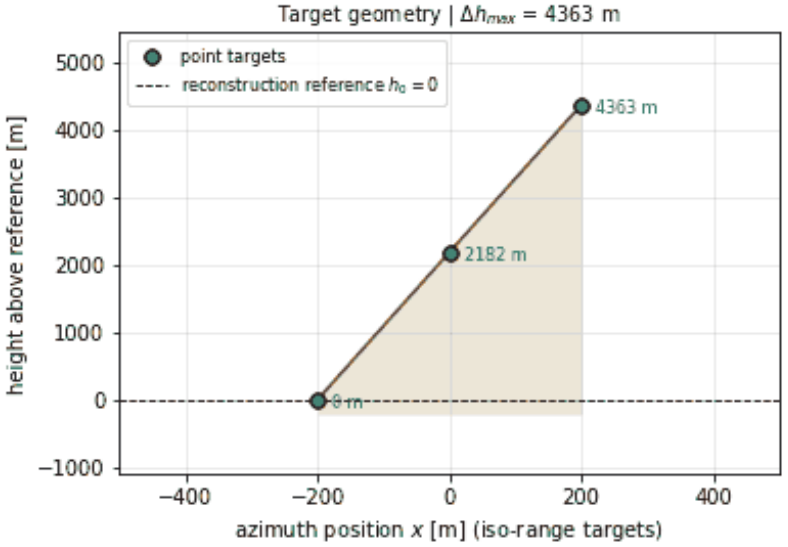



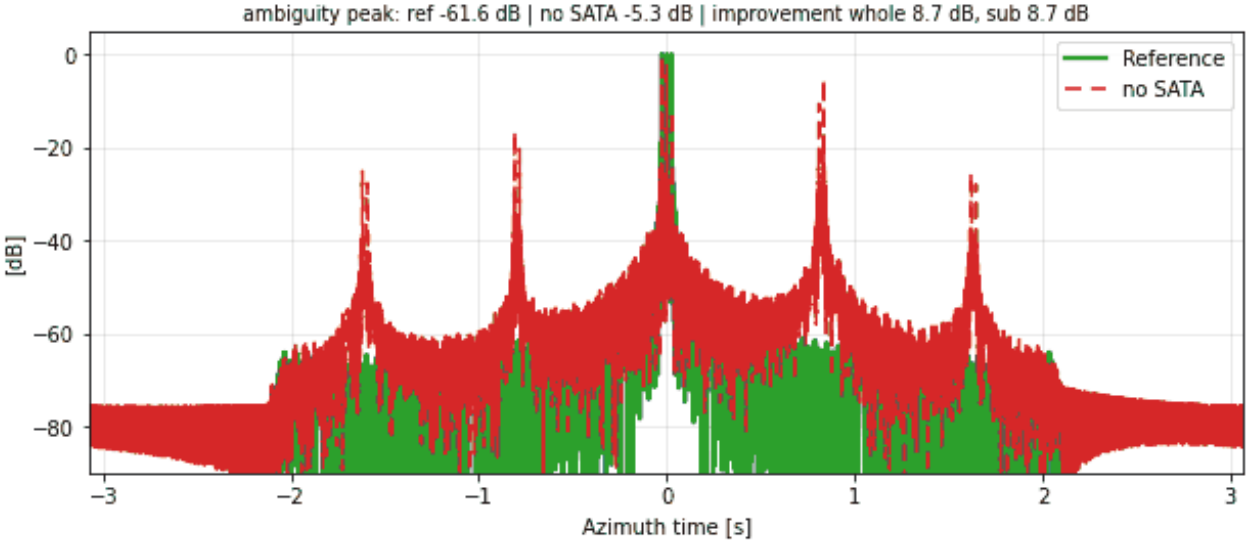



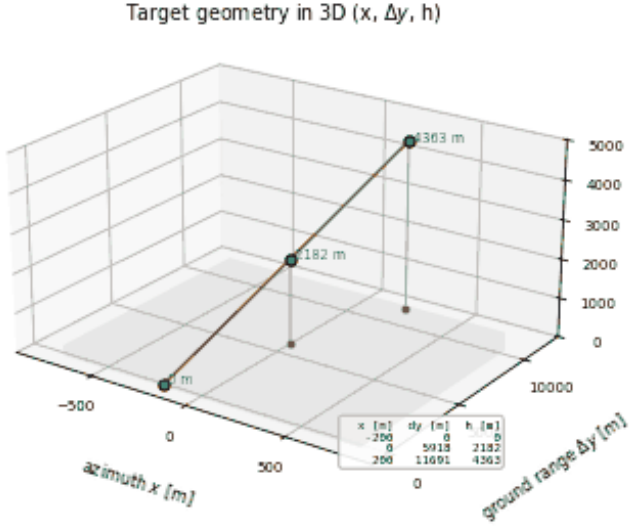
RA-SL-025 | SATA 1D | along-track ramp: N = 3, $\alpha = 40°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

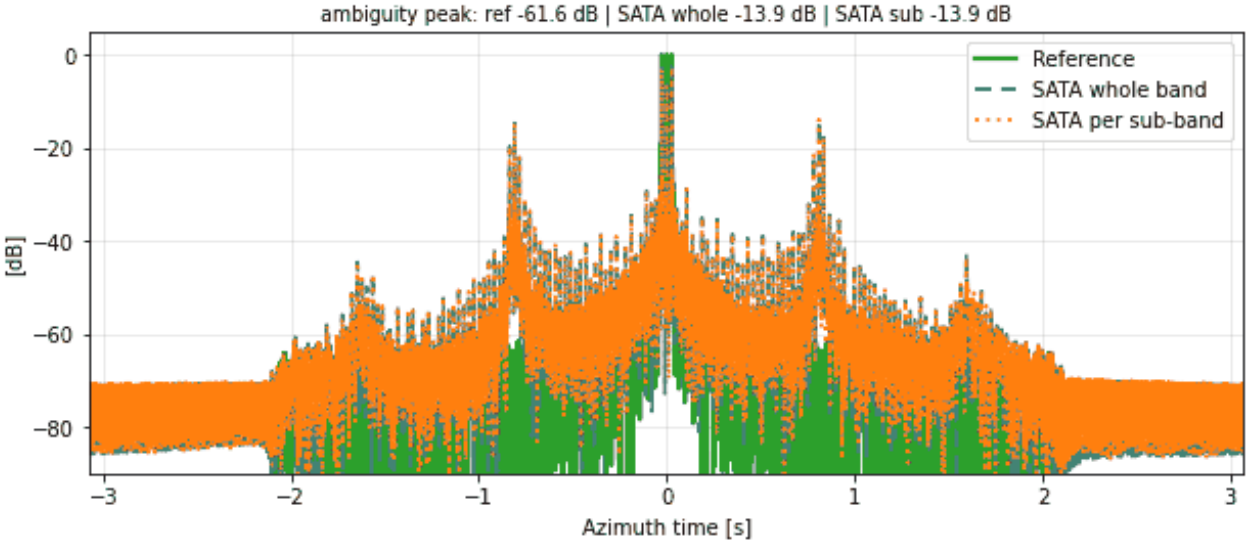





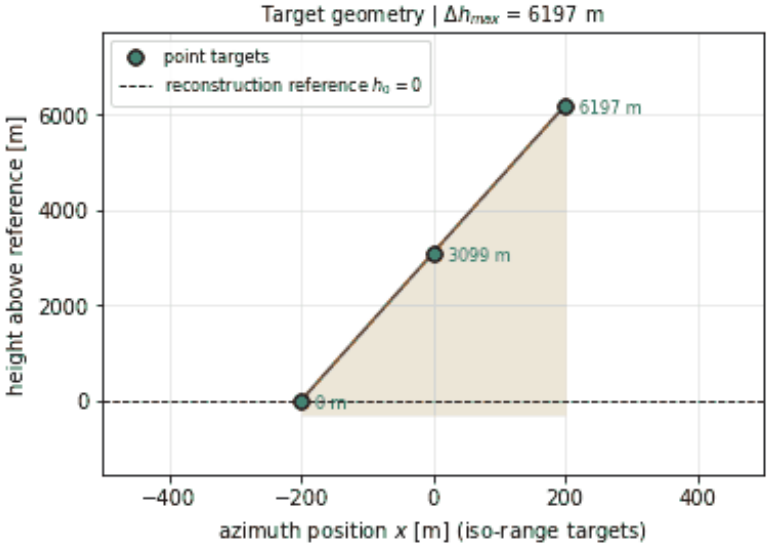



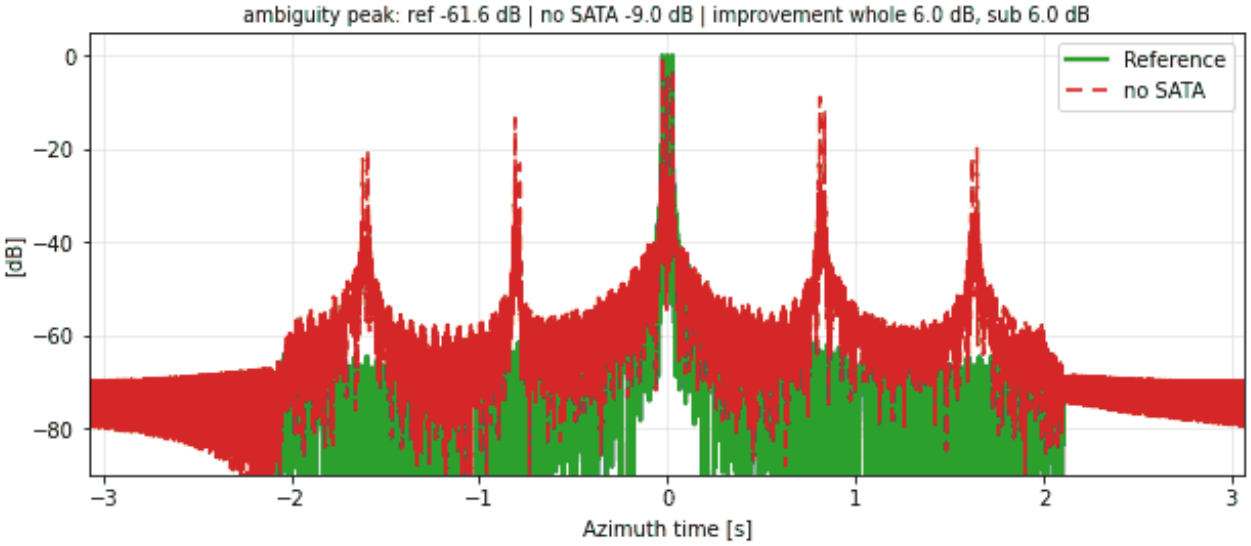



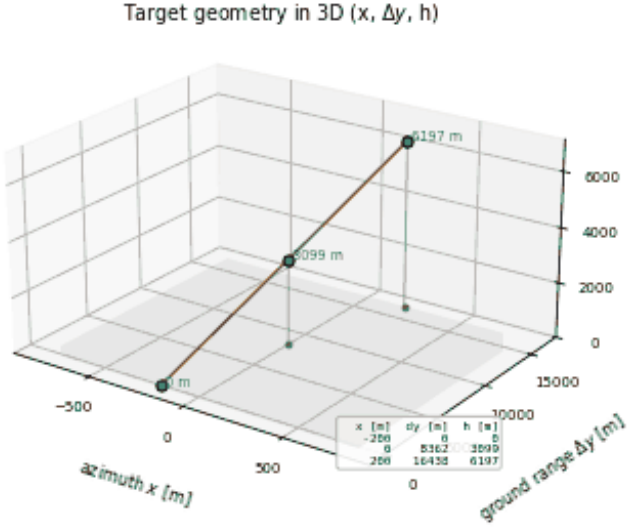
RA-SL-026 | SATA 1D | along-track ramp: N = 3, $\alpha = 50°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a = 1235$ Hz | $\Delta b_{at} = 7.69$ m (DPCA)

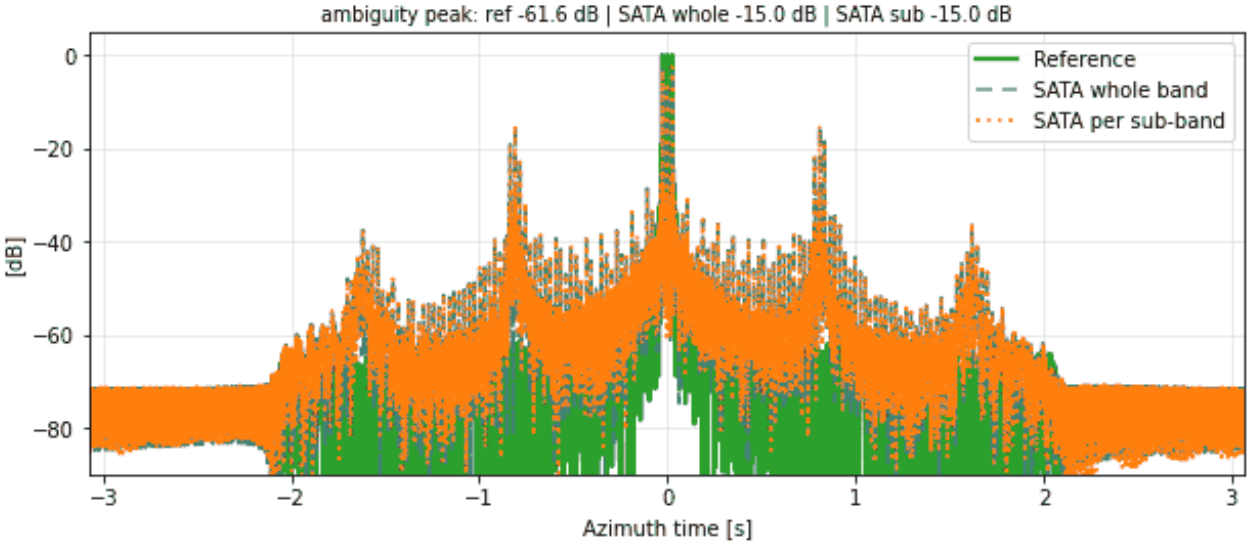





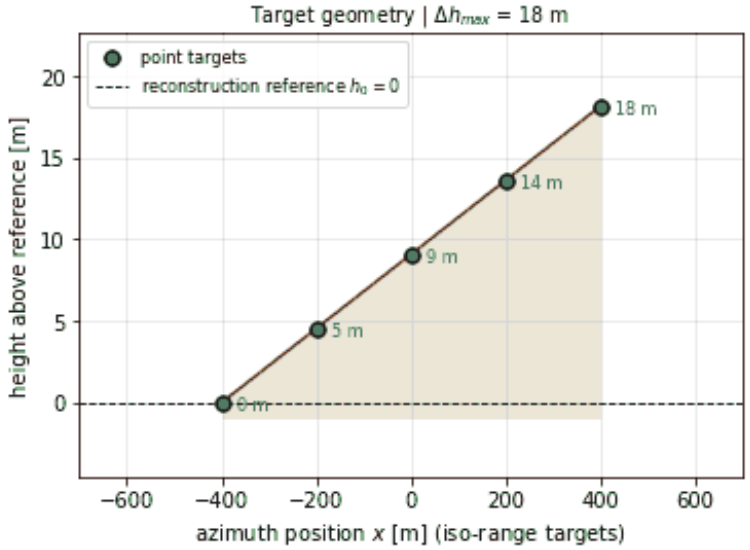



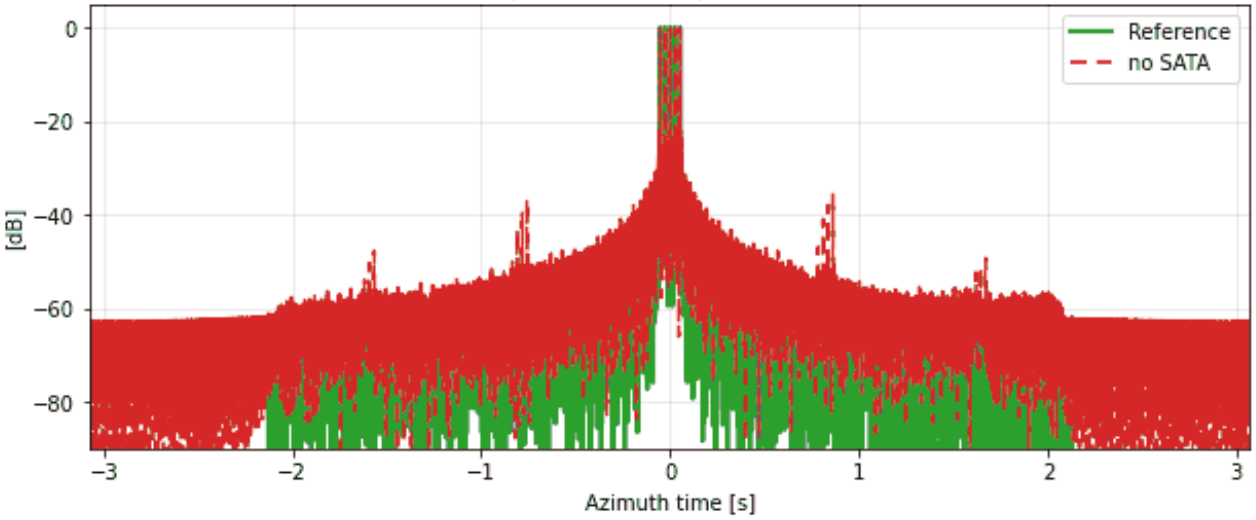



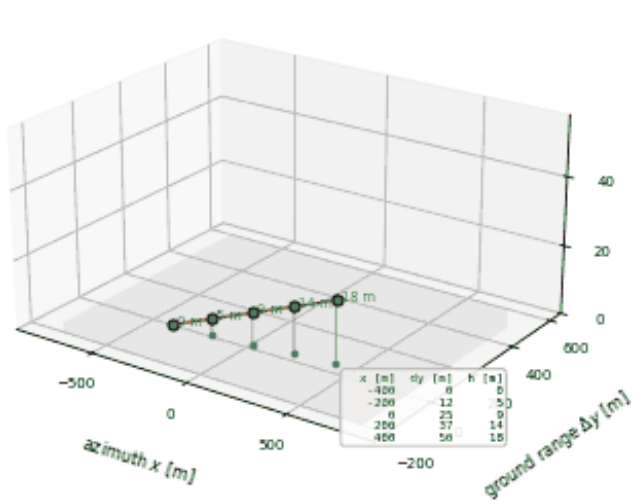
RA-SL-027 | SATA 1D | along-track ramp: N = 5, $\alpha = 0.1°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

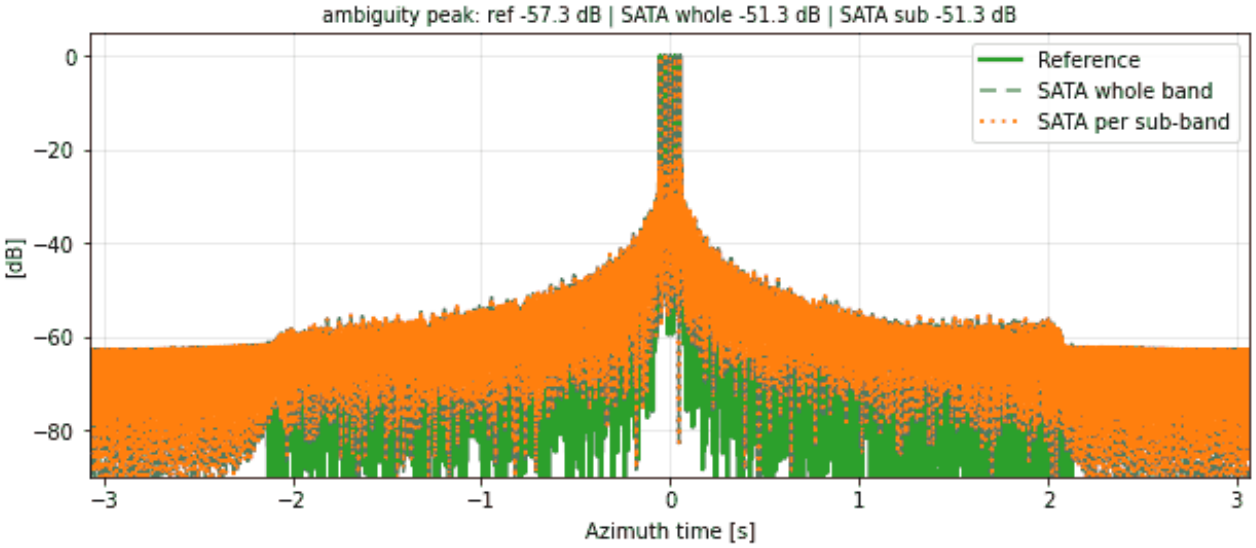





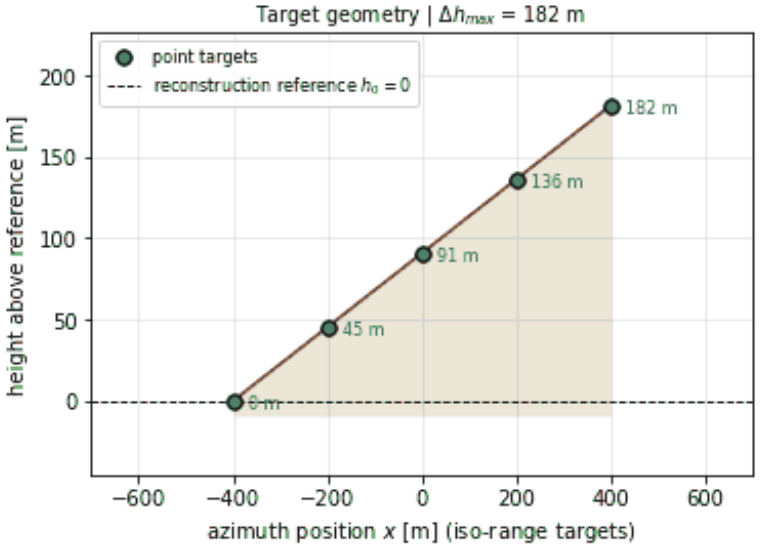



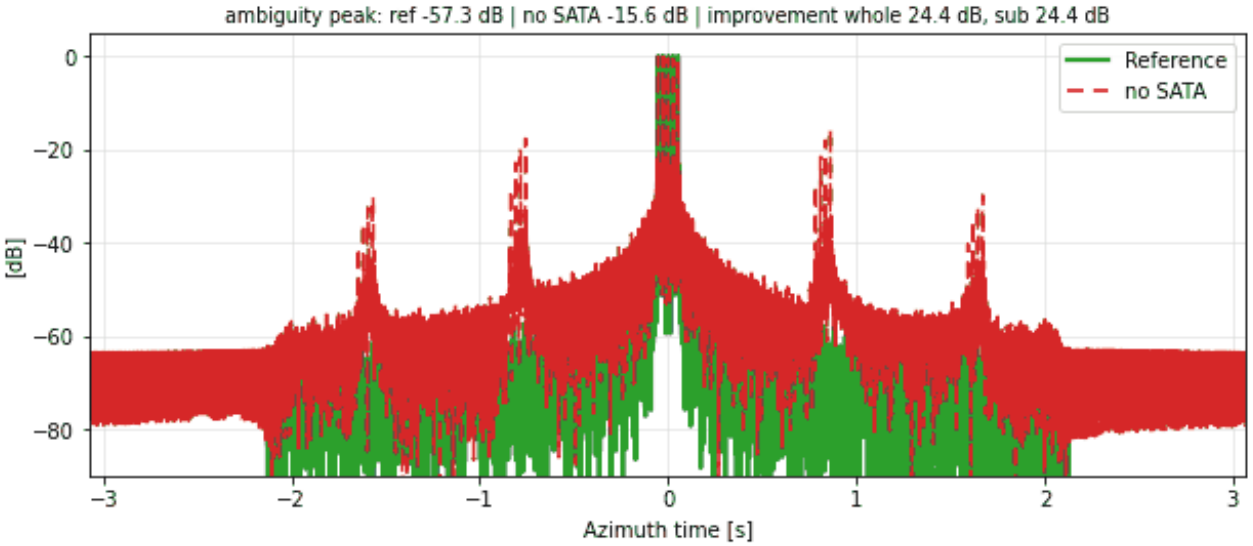



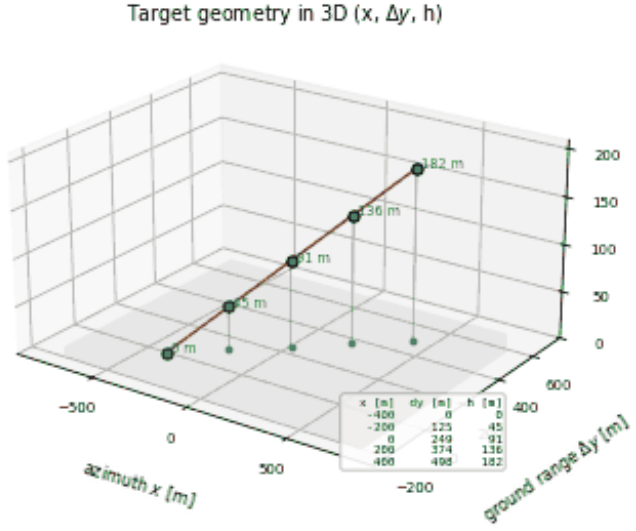
RA-SL-028 | SATA 1D | along-track ramp: N = 5, $\alpha = 1°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

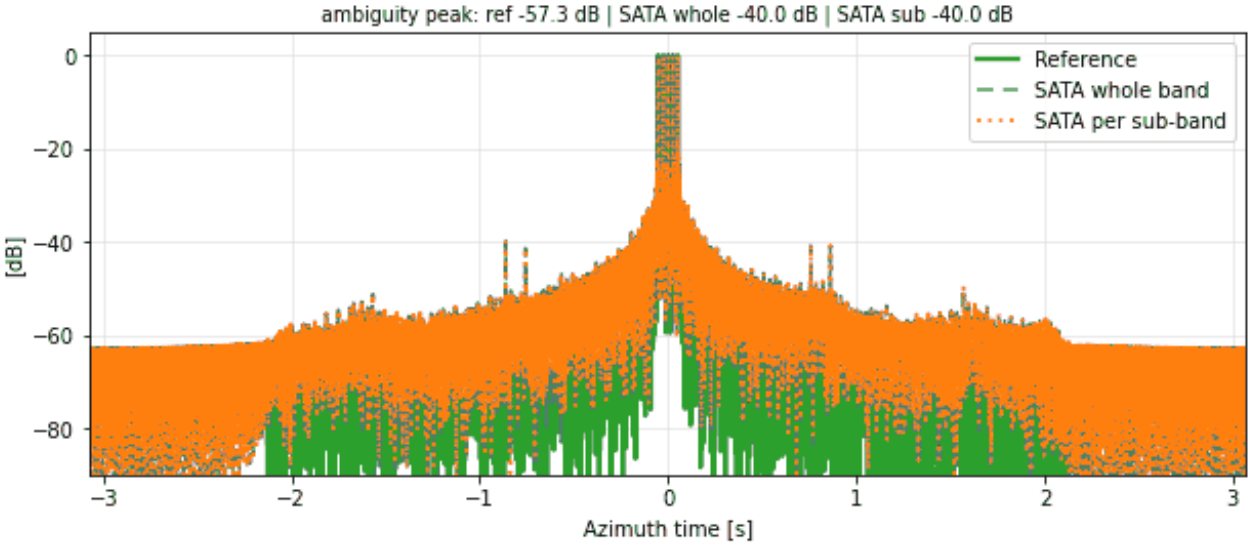





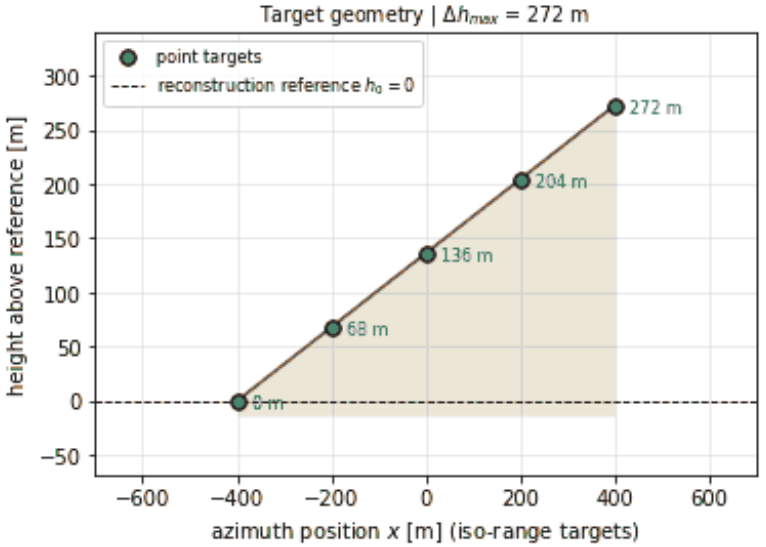



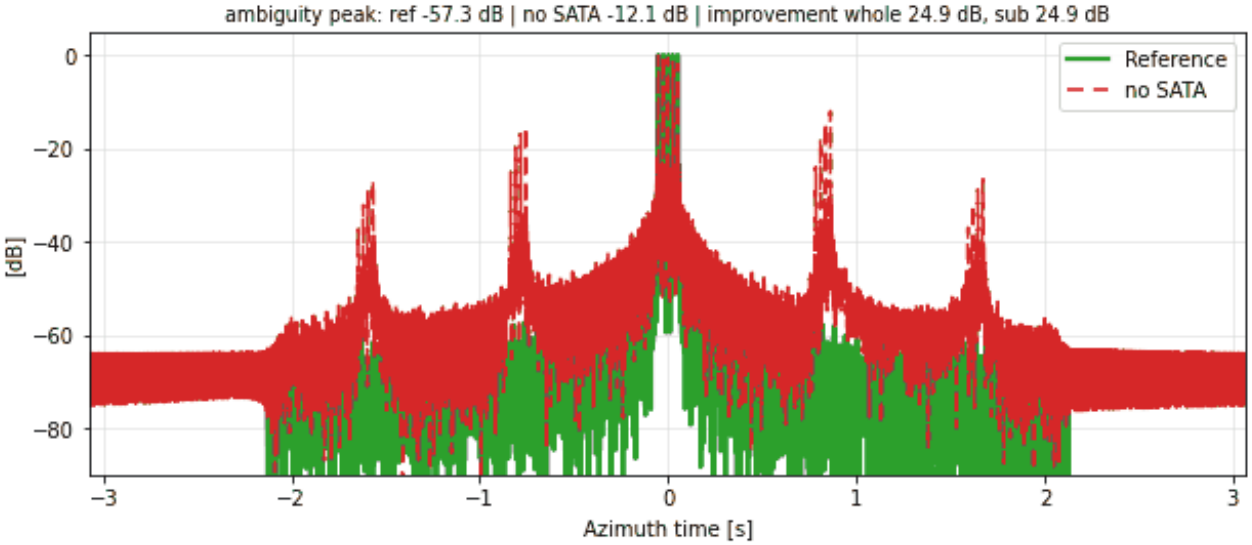



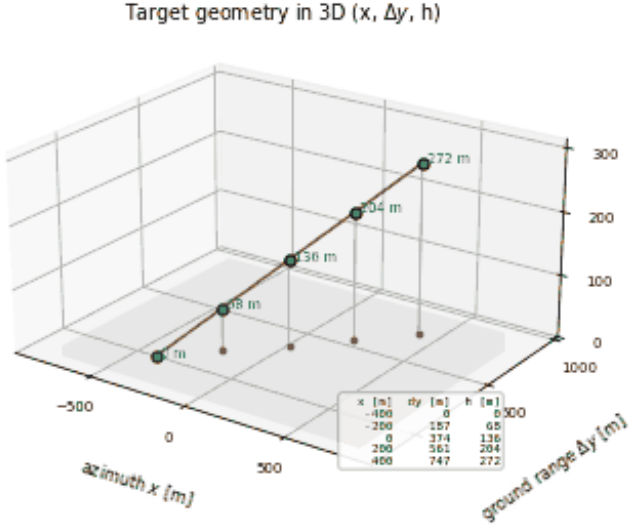
RA-SL-029 | SATA 1D | along-track ramp: N = 5, $\alpha$ = 1.5° (heights $j \cdot 2600 \tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

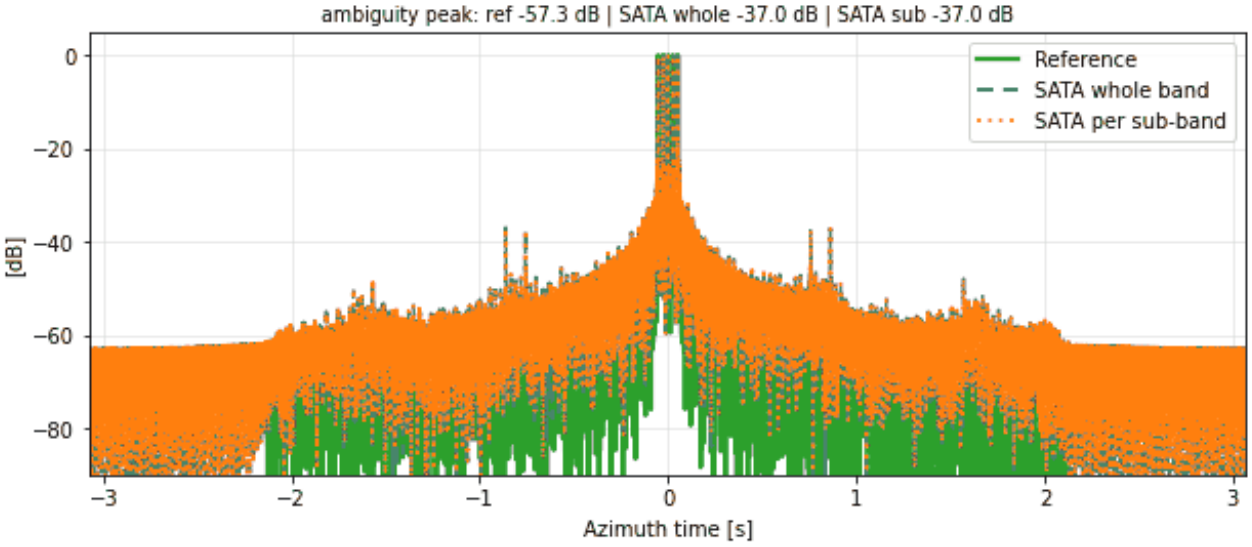





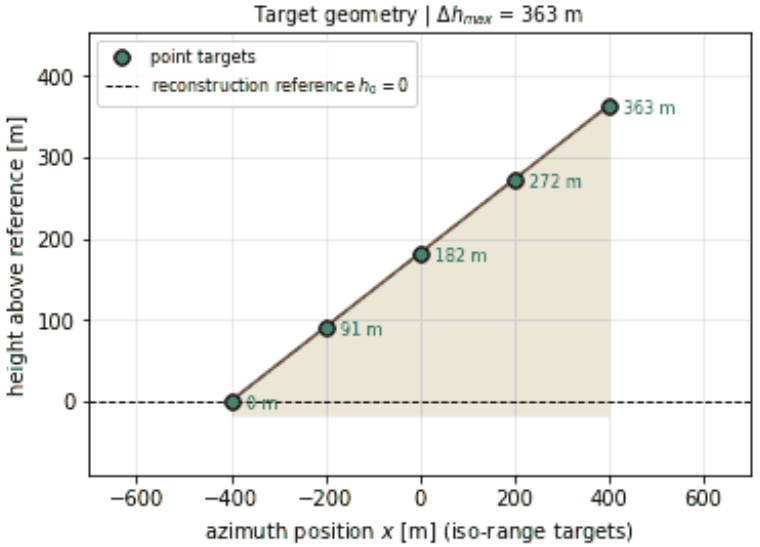



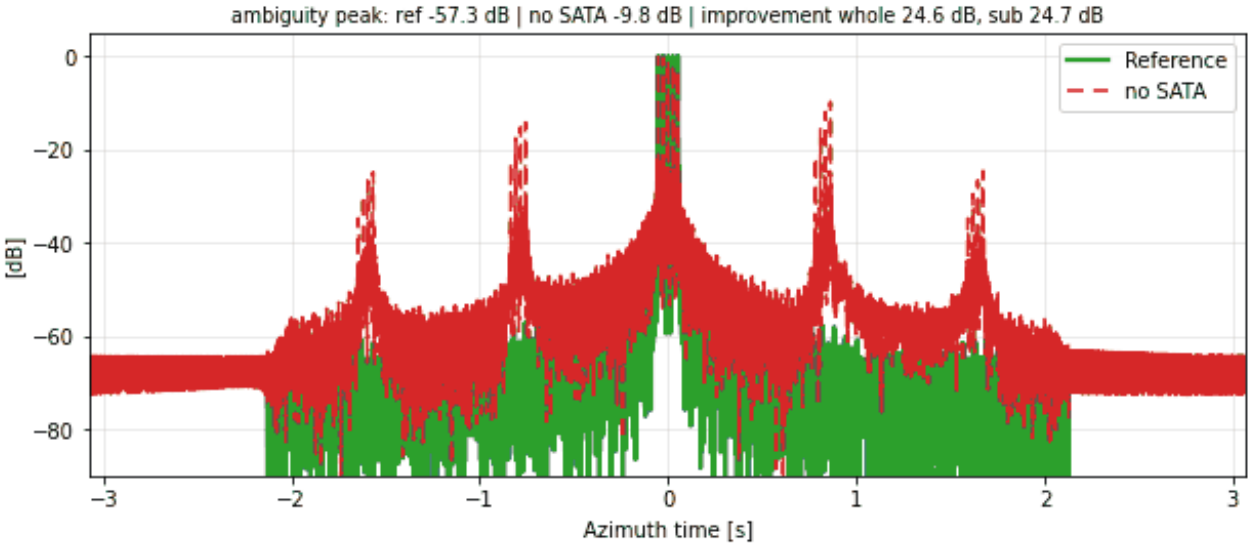



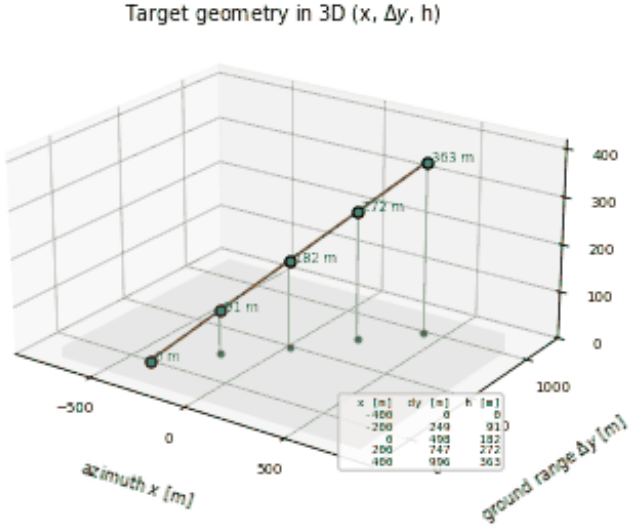
RA-SL-030 | SATA 1D | along-track ramp: N = 5, $\alpha = 2°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

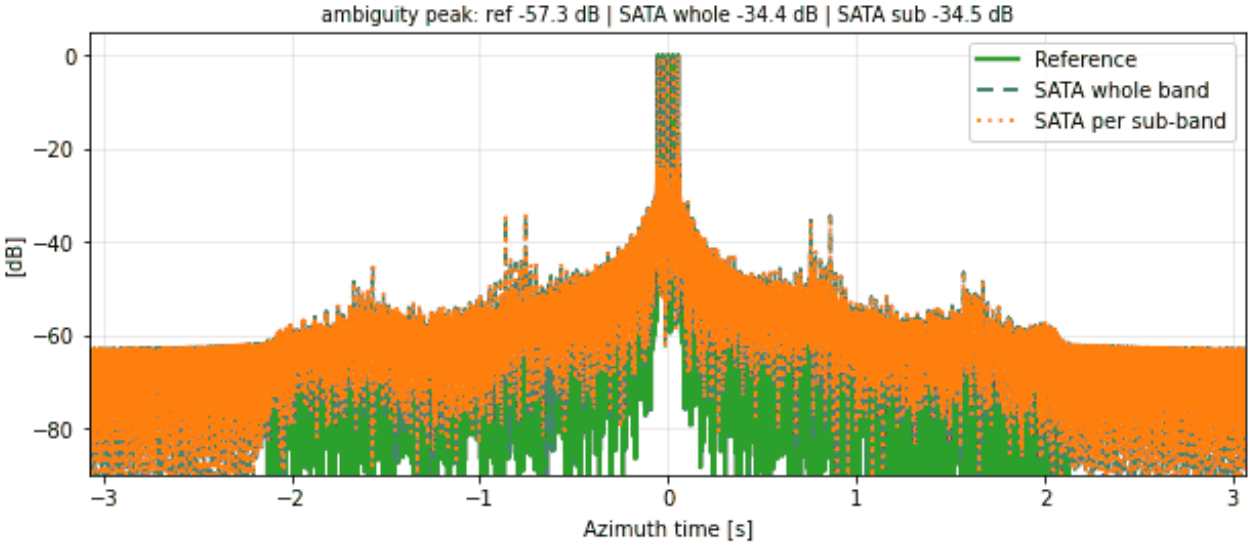





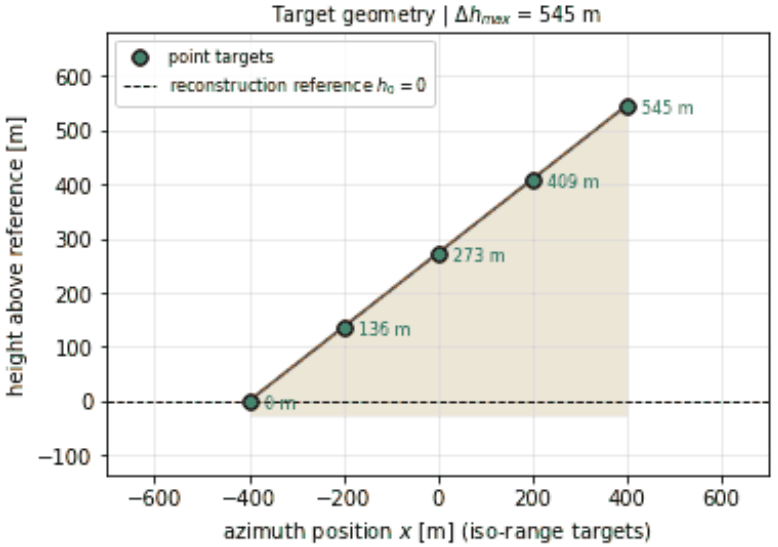



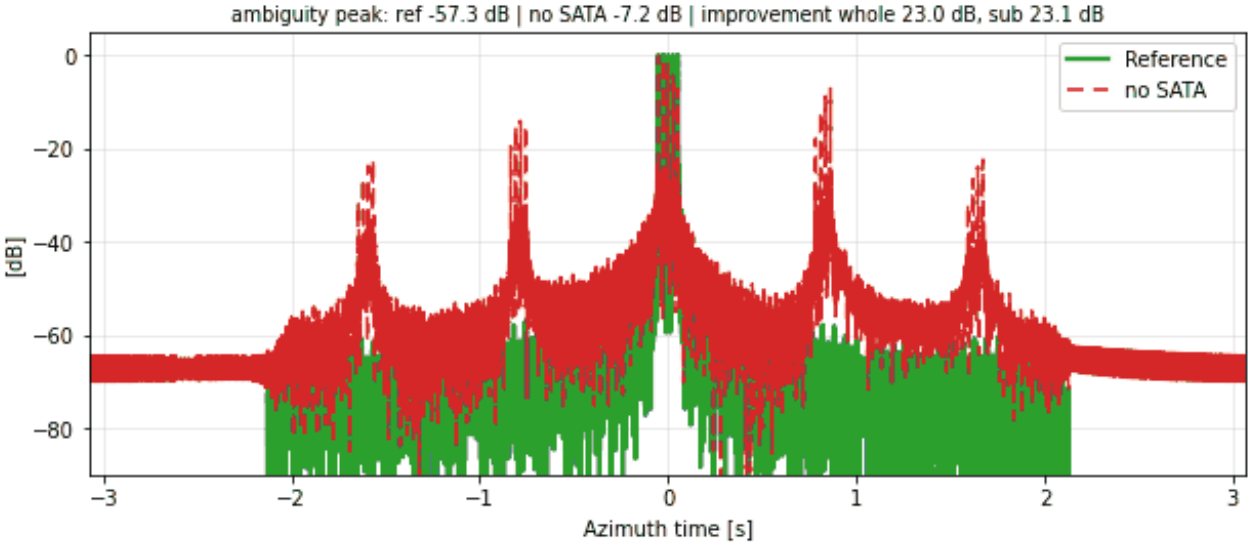



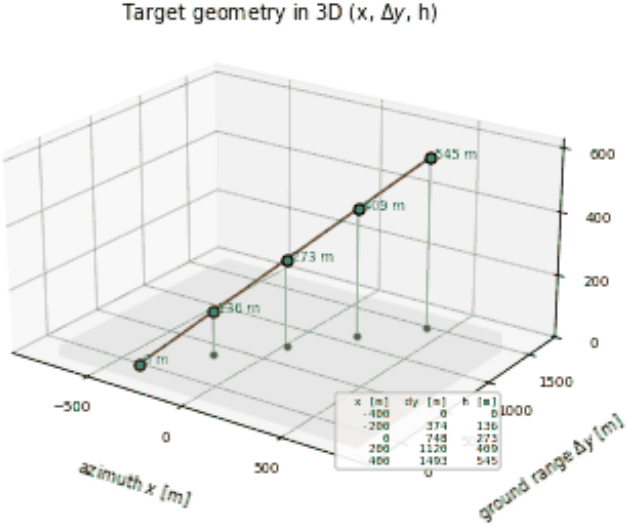
RA-SL-031 | SATA 1D | along-track ramp: N = 5, $\alpha = 3°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

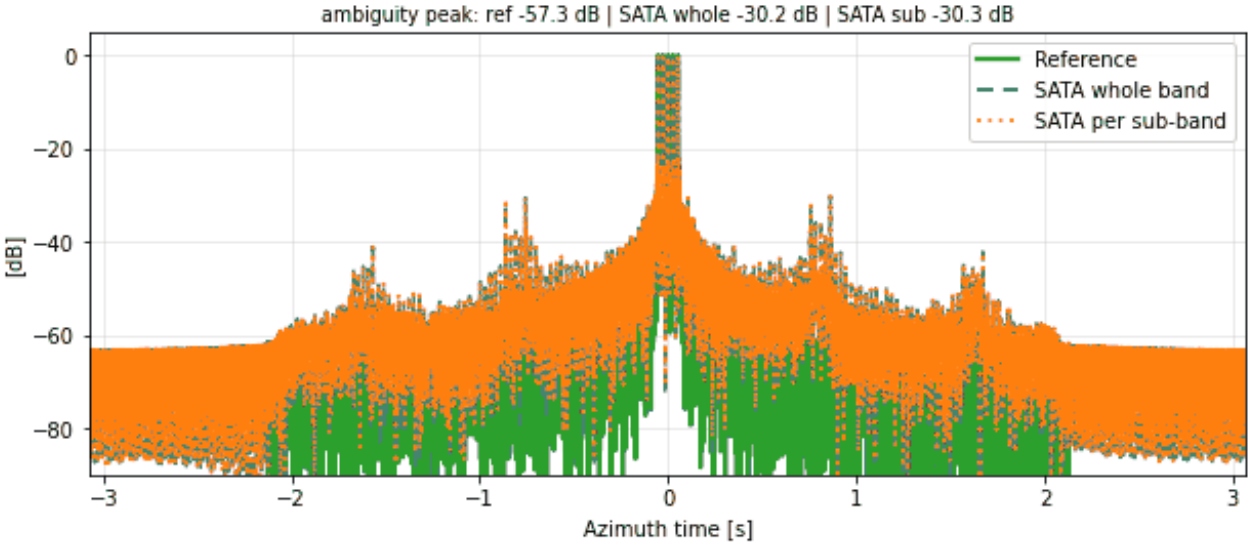





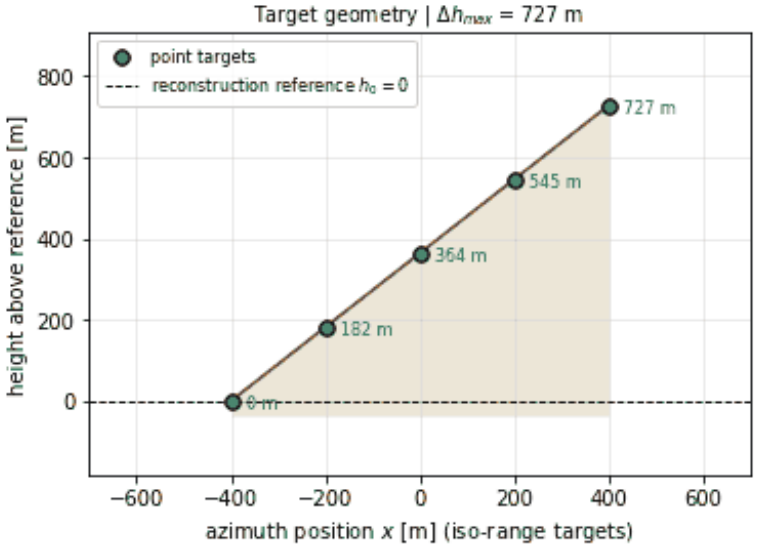



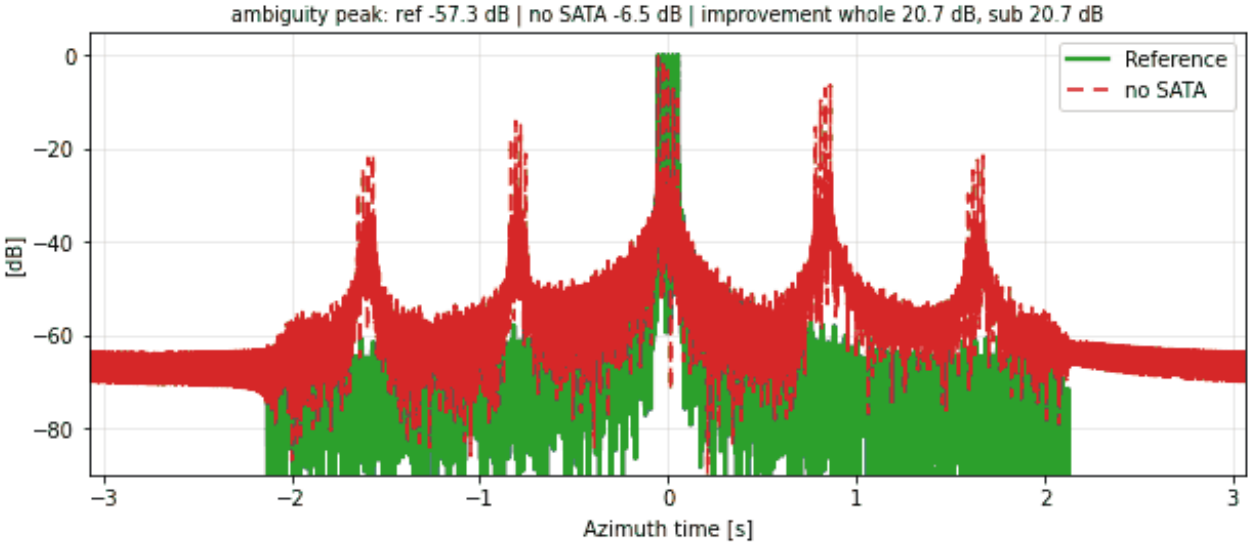



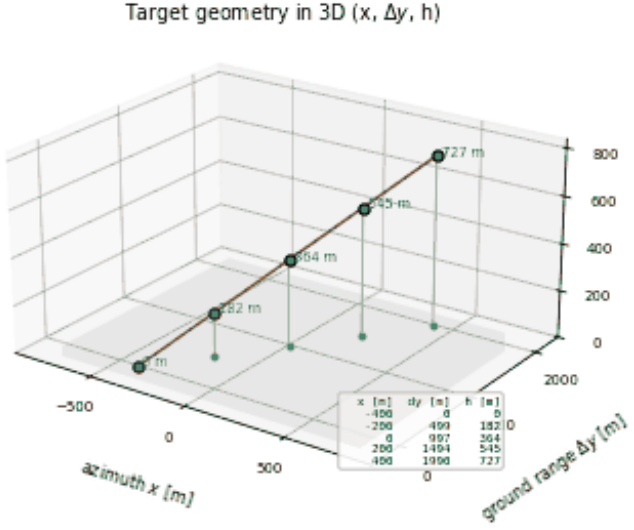
RA-SL-032 | SATA 1D | along-track ramp: N = 5, $\alpha = 4°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

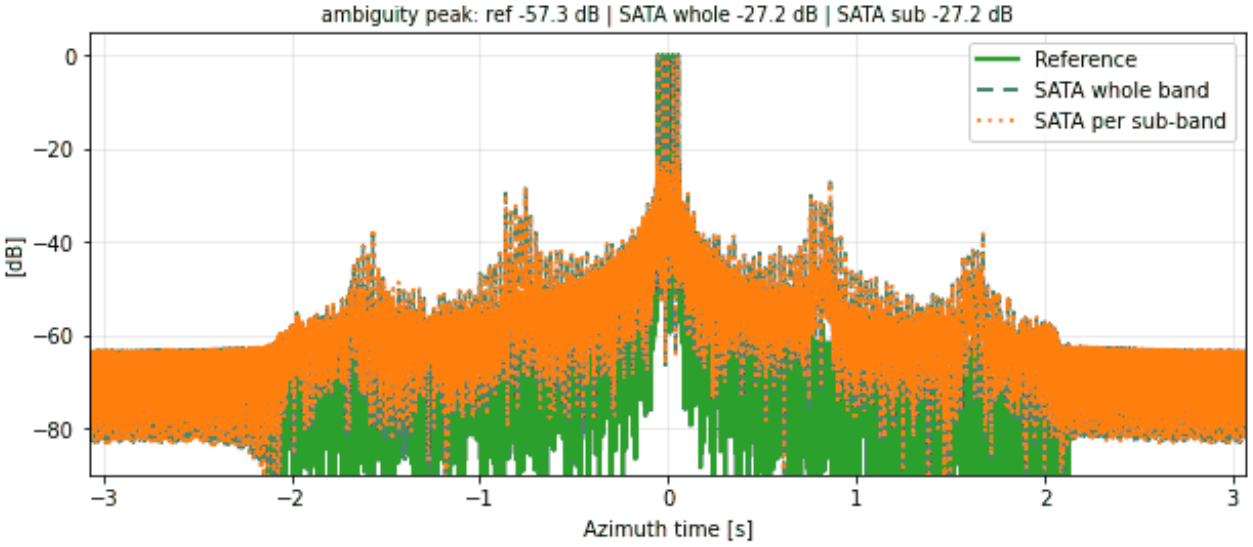






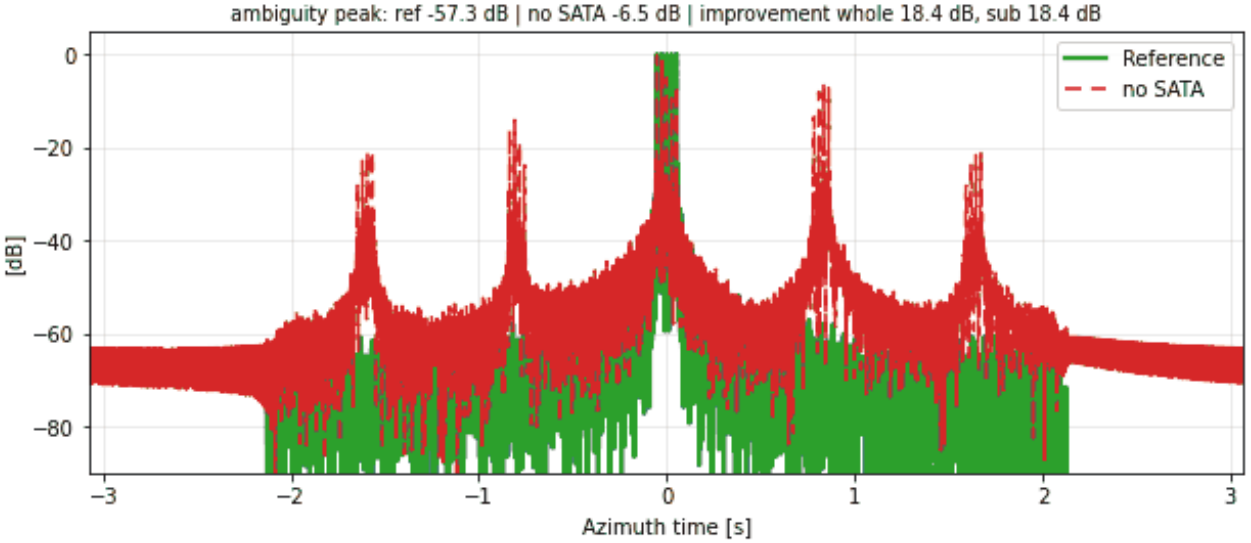



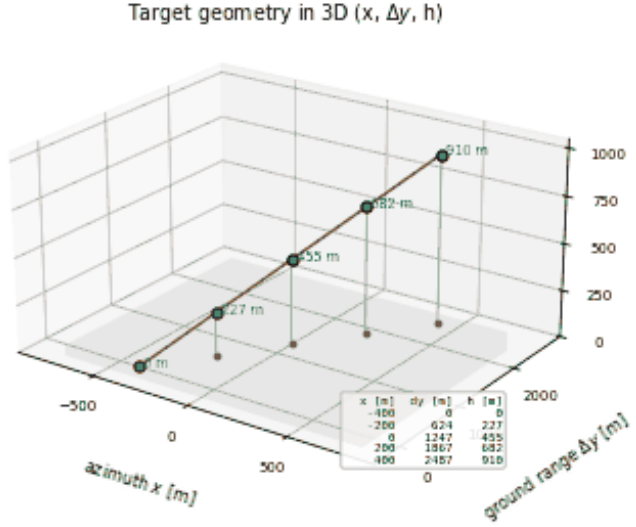



RA-SL-033 | SATA 1D | along-track ramp: N = 5, $\alpha = 5°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

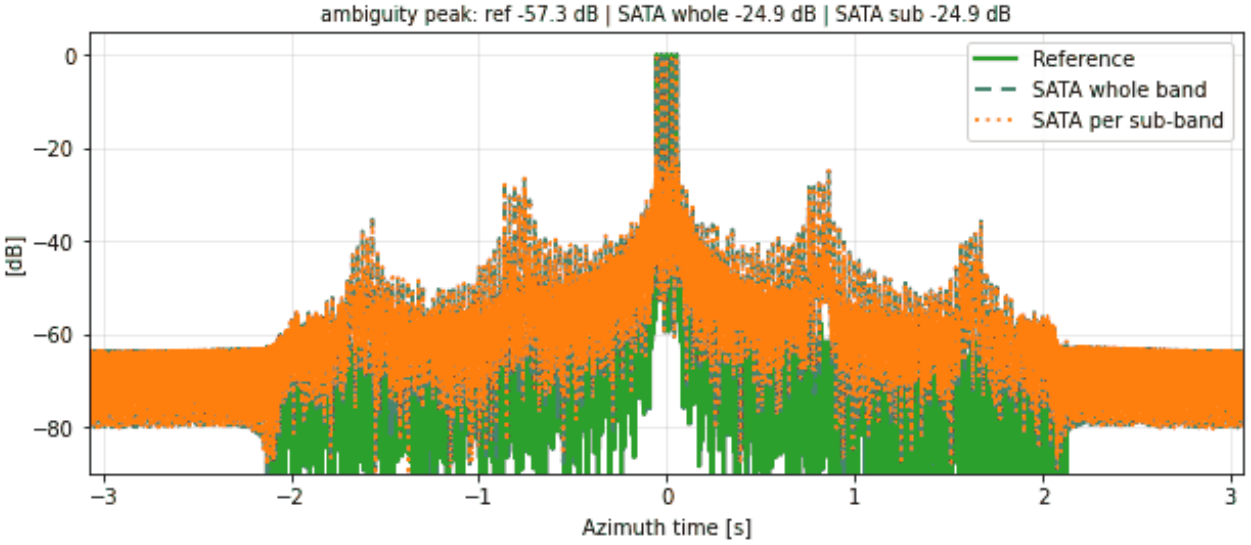

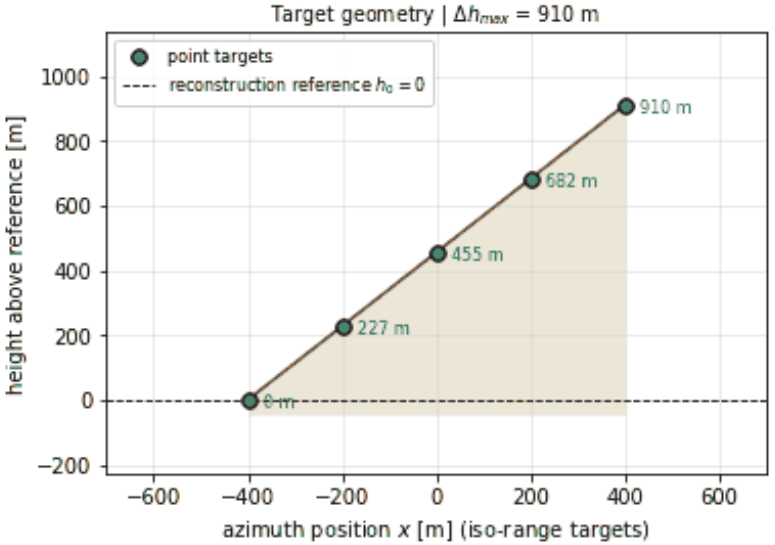



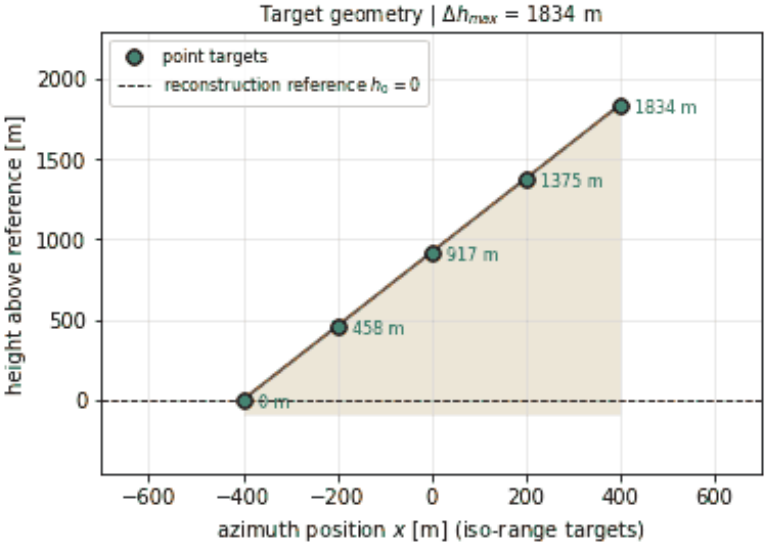



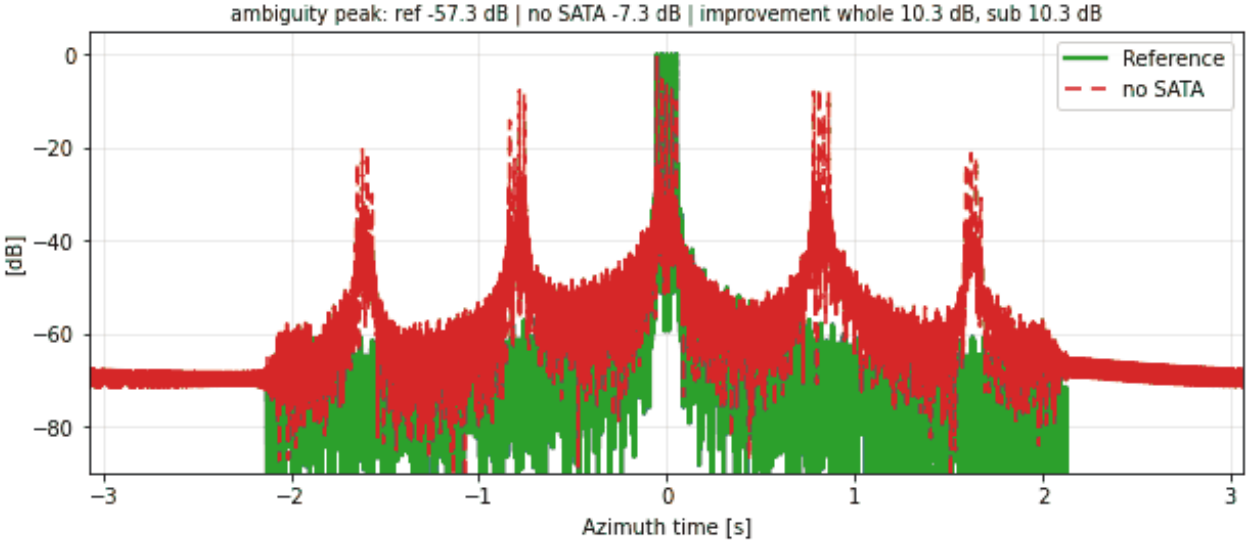



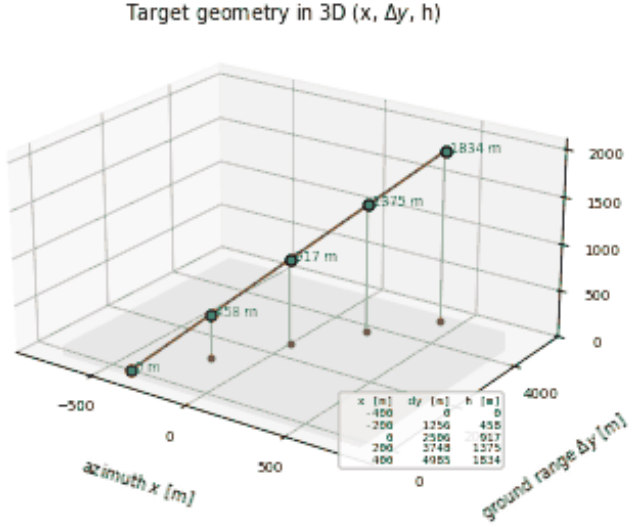
RA-SL-034 | SATA 1D | along-track ramp: N = 5, $\alpha = 10°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a = 1235$ Hz | $\Delta b_{at} = 7.69$ m (DPCA)

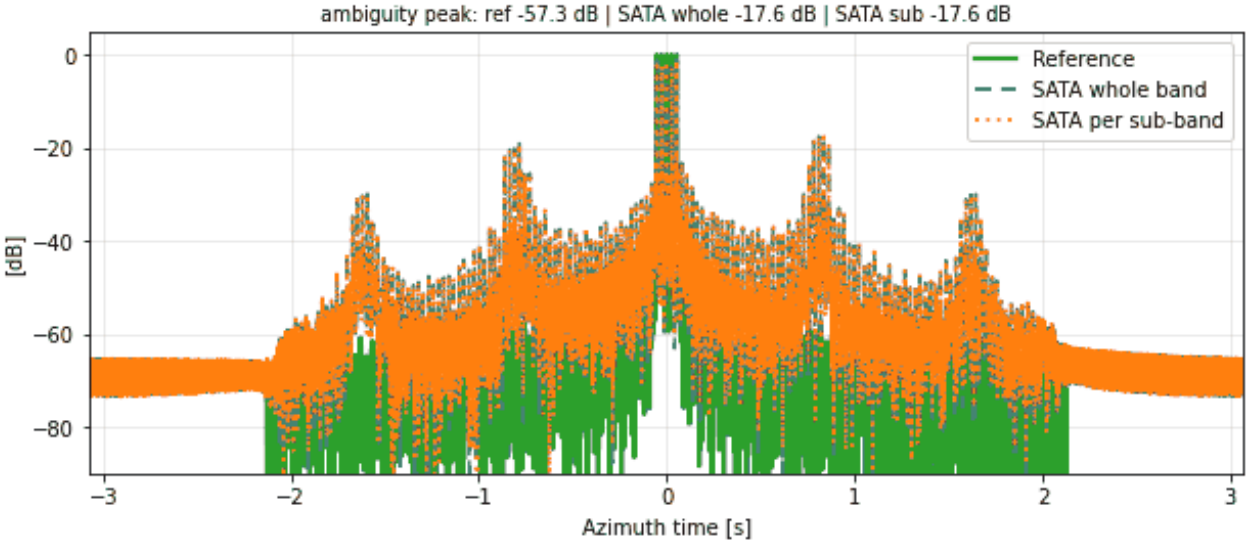





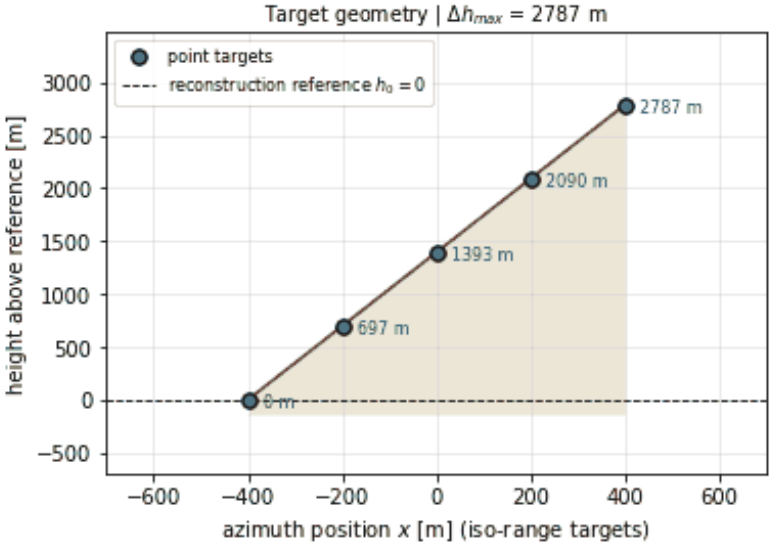



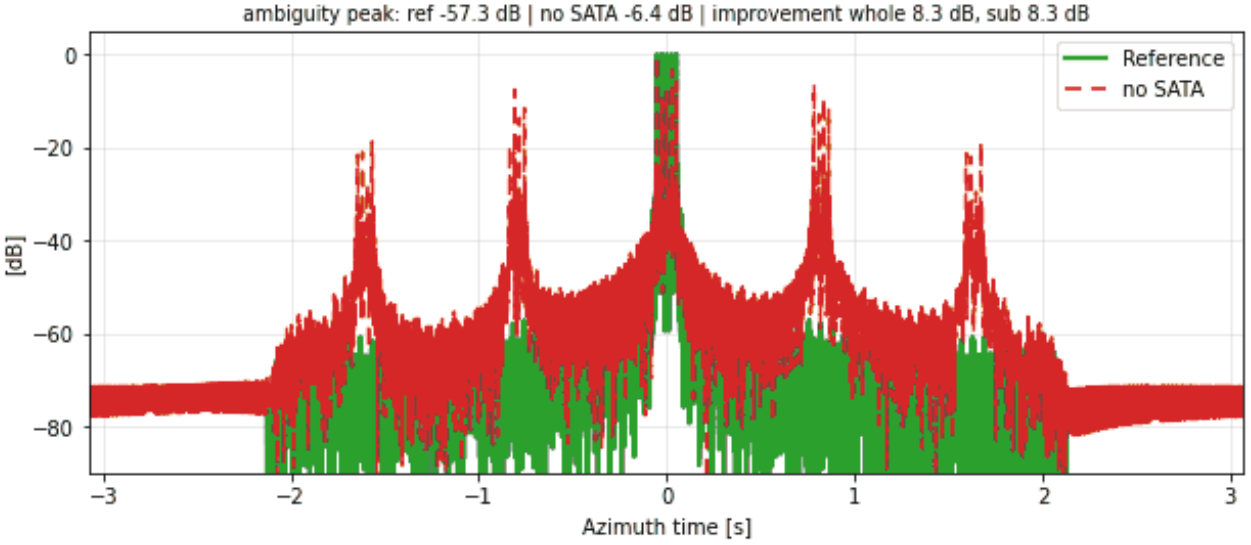



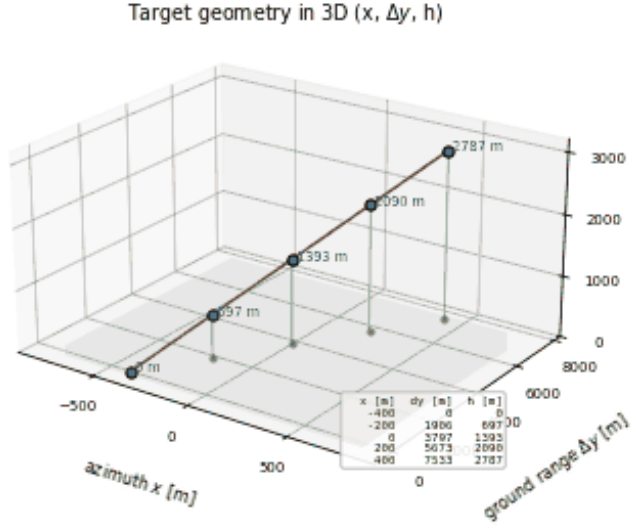
RA-SL-035 | SATA 1D | along-track ramp: N = 5, $\alpha = 15°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

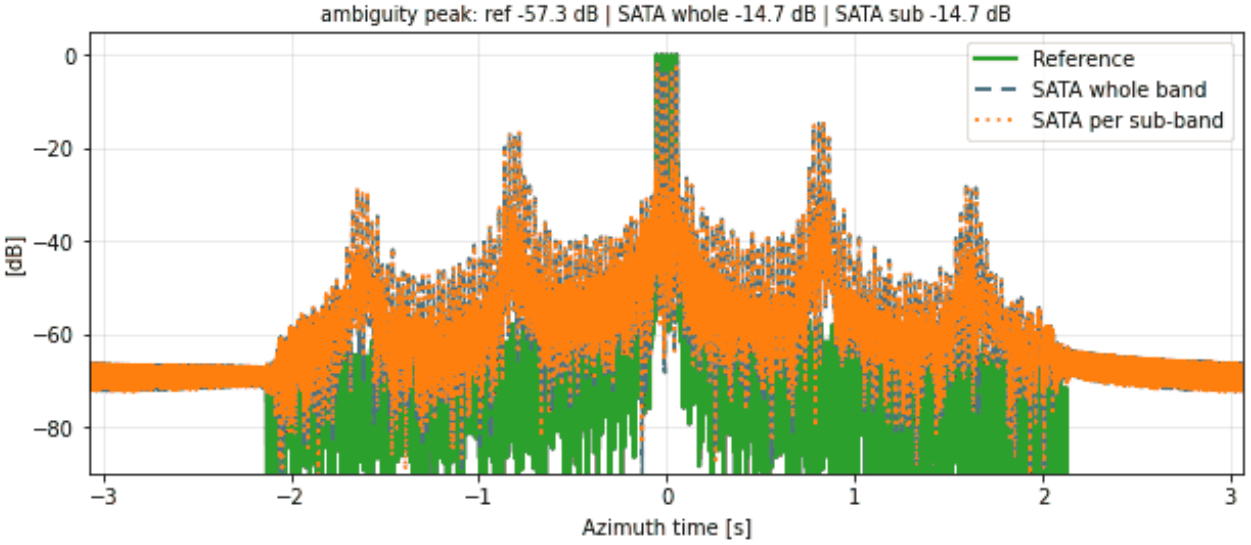





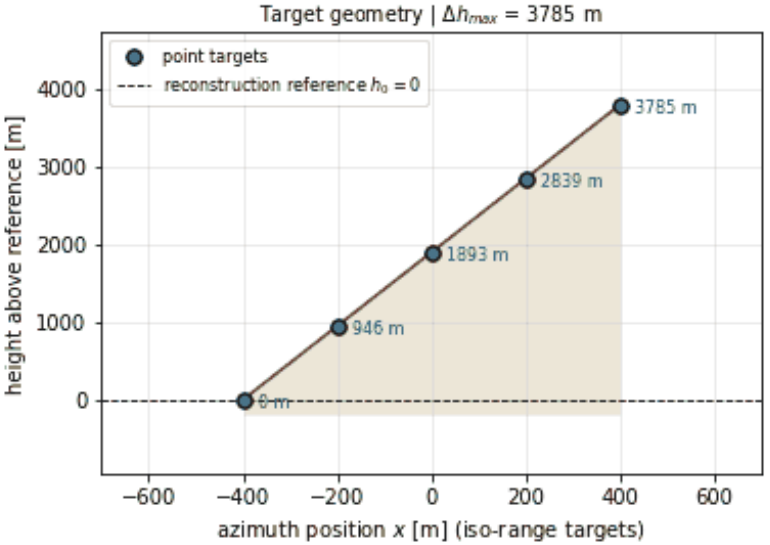



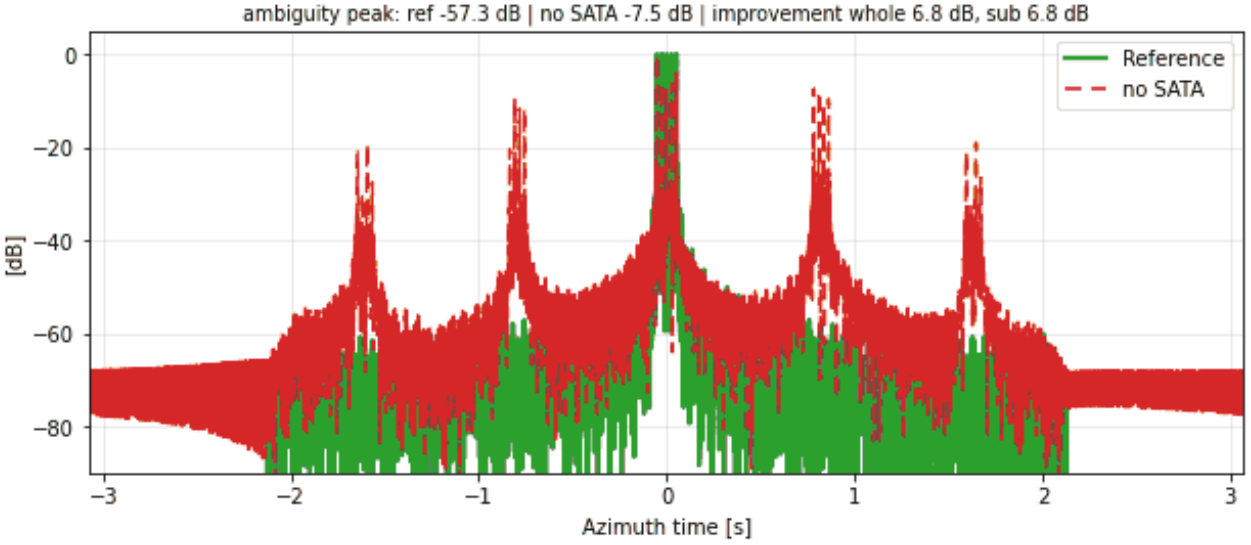



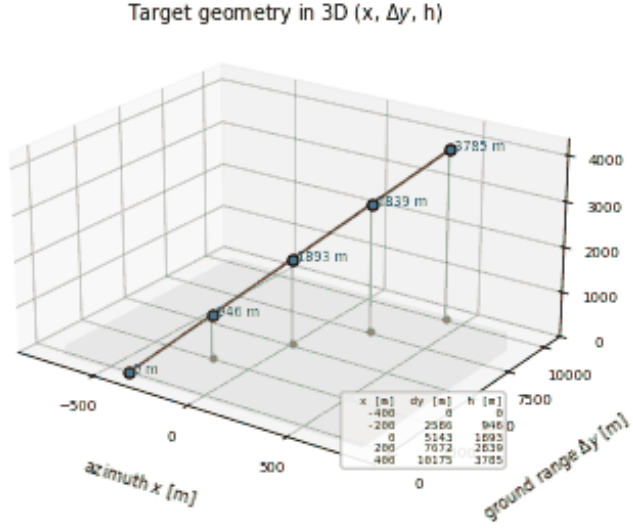
RA-SL-036 | SATA 1D | along-track ramp: N = 5, $\alpha = 20°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

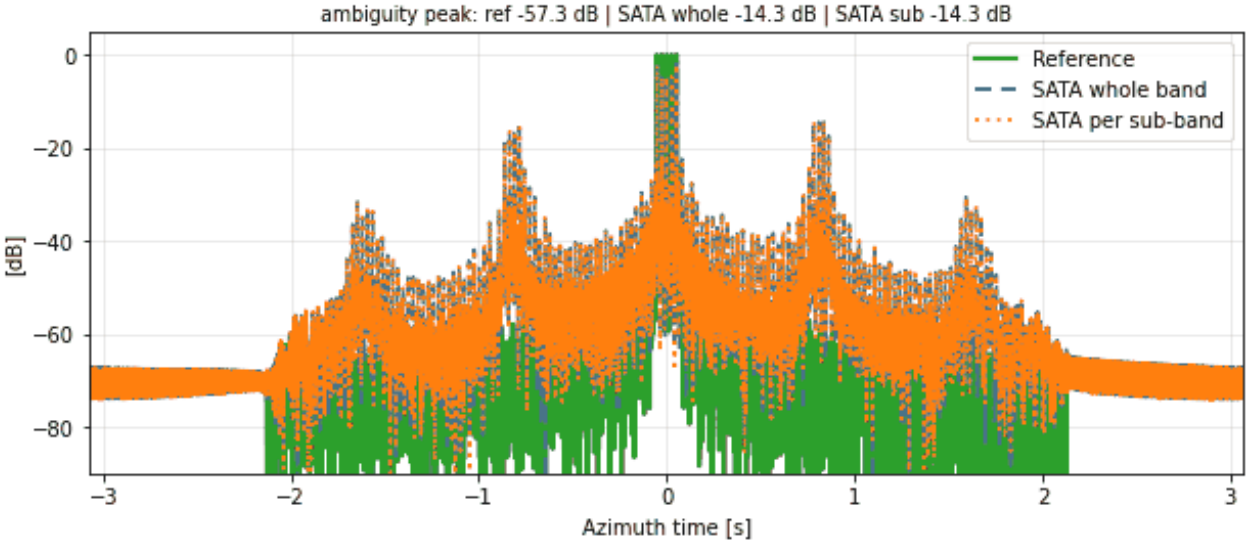





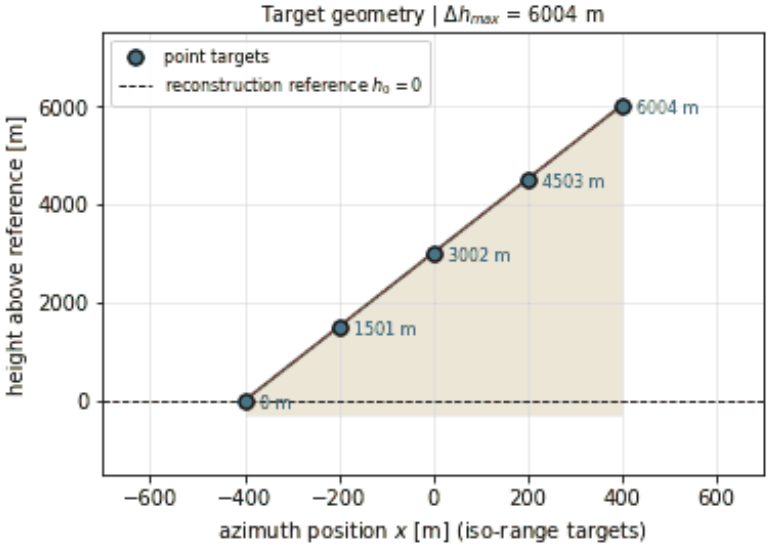



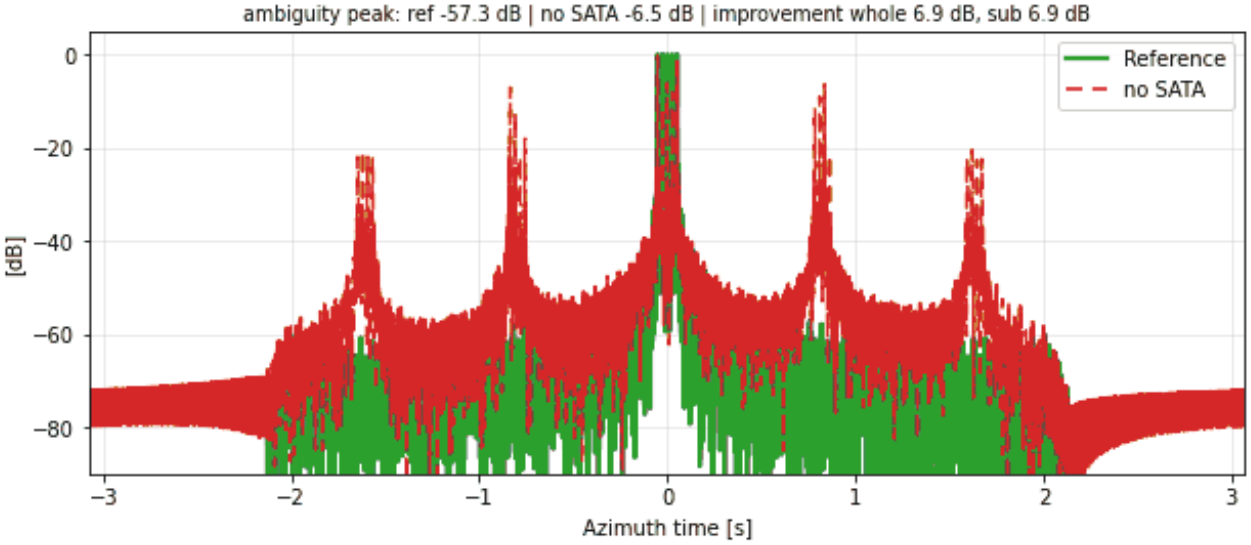



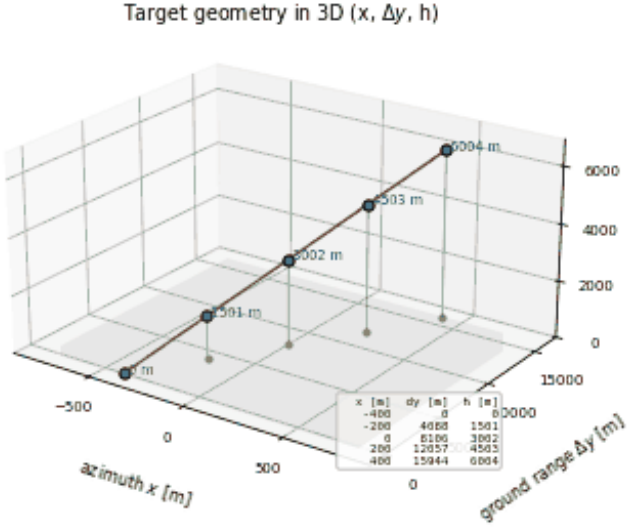
RA-SL-037 | SATA 1D | along-track ramp: N = 5, $\alpha = 30°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a = 1235$ Hz | $\Delta b_{at} = 7.69$ m (DPCA)

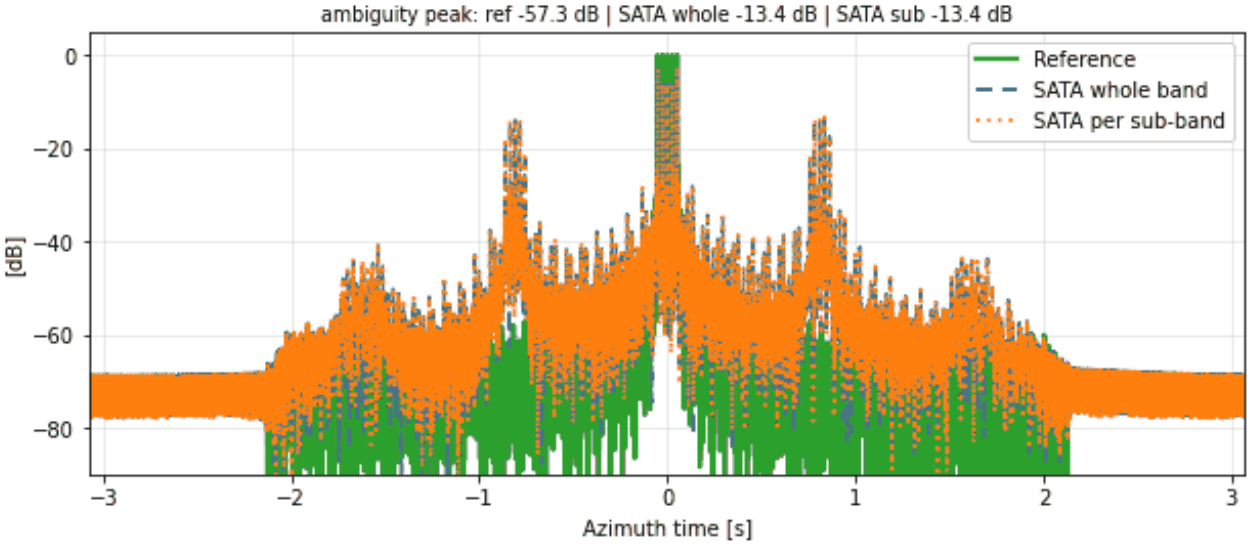





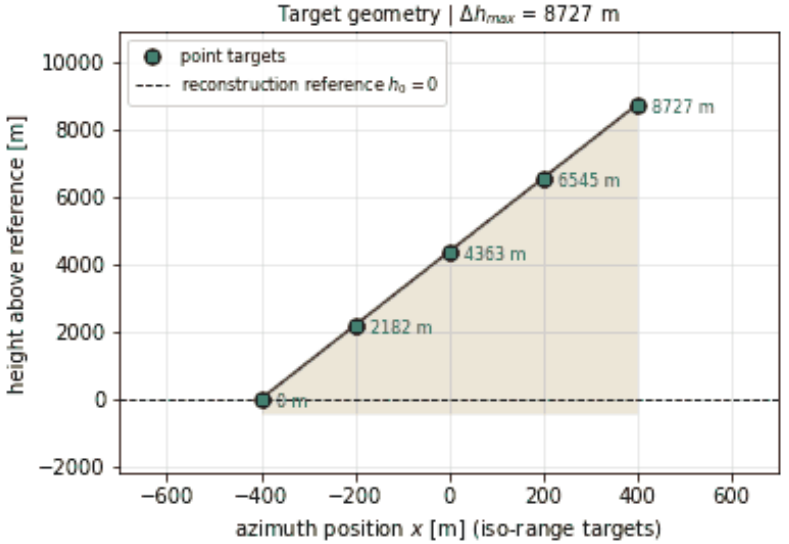



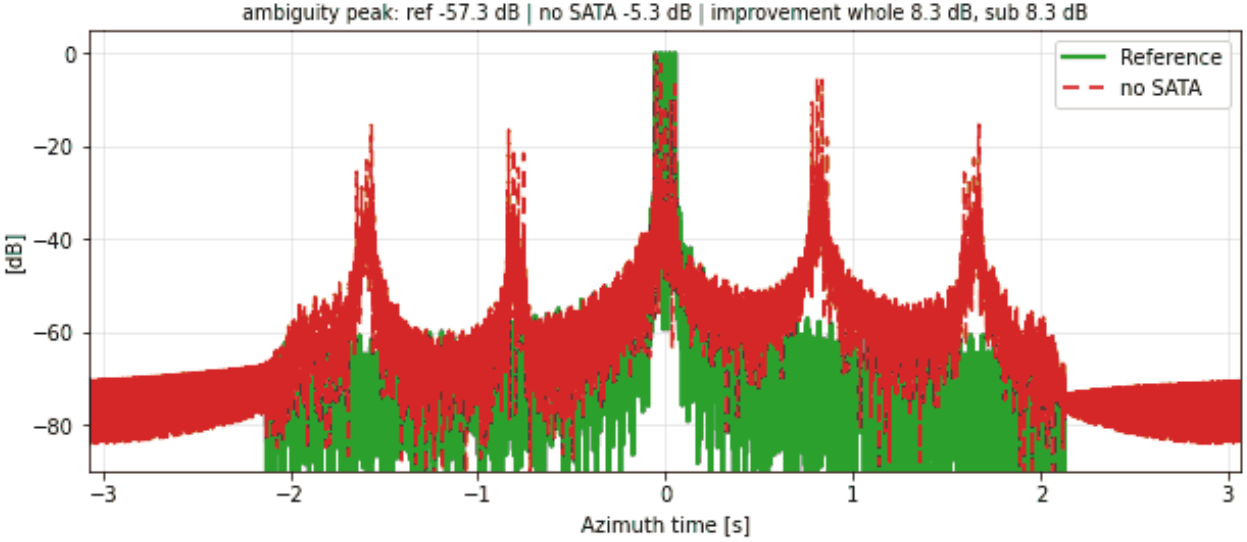



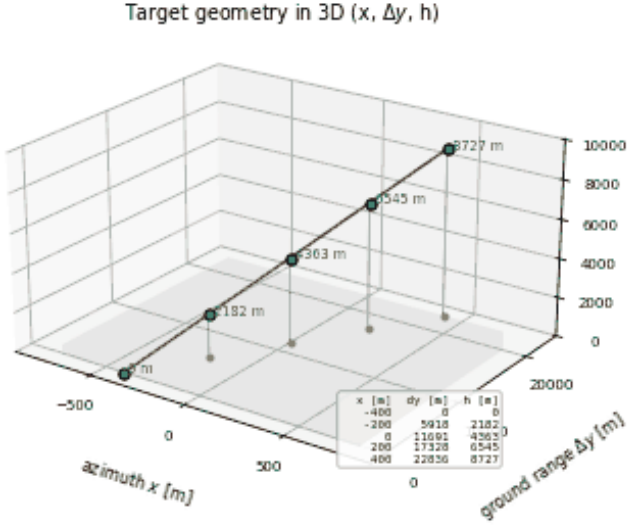
RA-SL-038 | SATA 1D | along-track ramp: N = 5, $\alpha = 40°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a = 1235$ Hz | $\Delta b_{at} = 7.69$ m (DPCA)

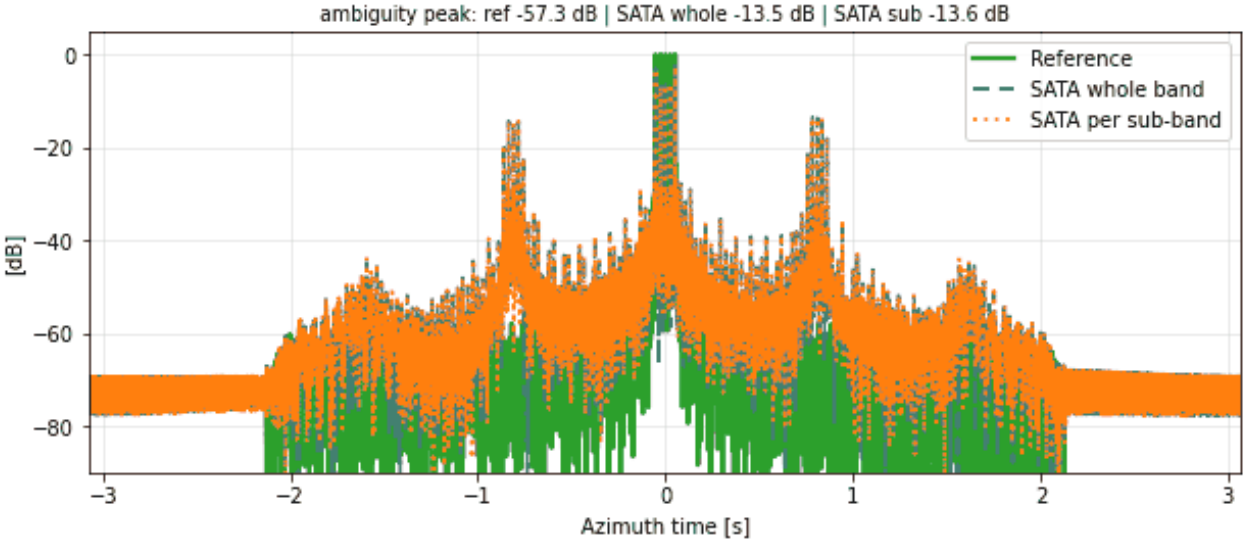





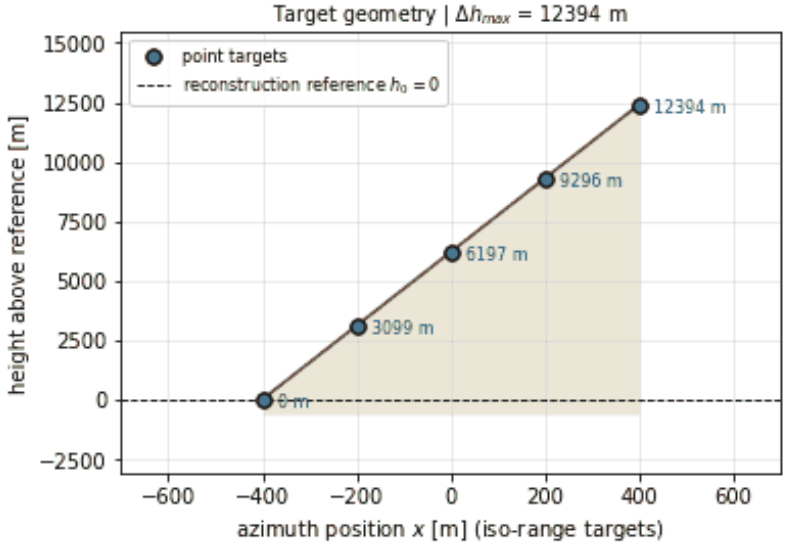



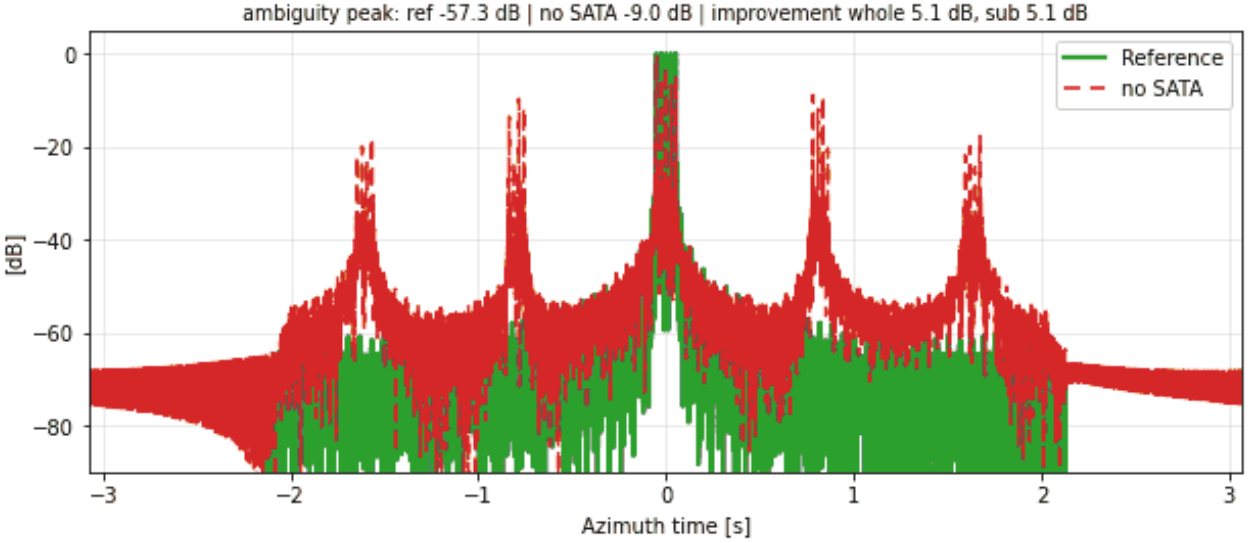



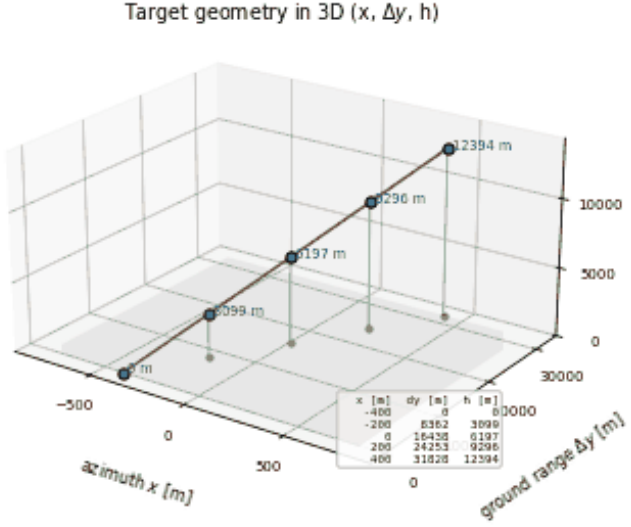
RA-SL-039 | SATA 1D | along-track ramp: N = 5, $\alpha = 50°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a = 1235$ Hz | $\Delta b_{at} = 7.69$ m (DPCA)

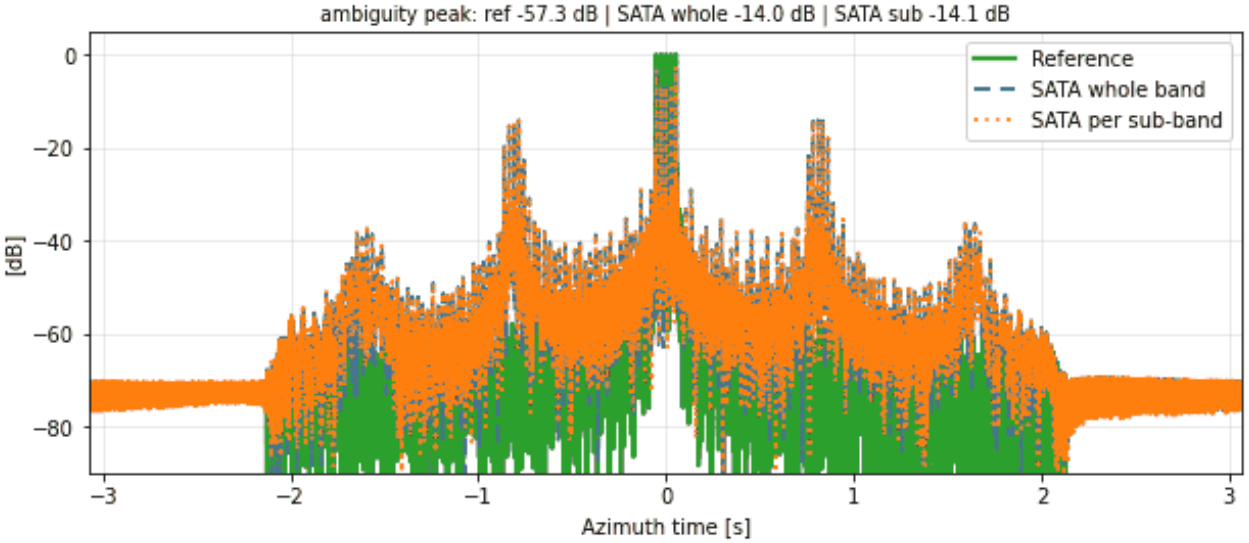





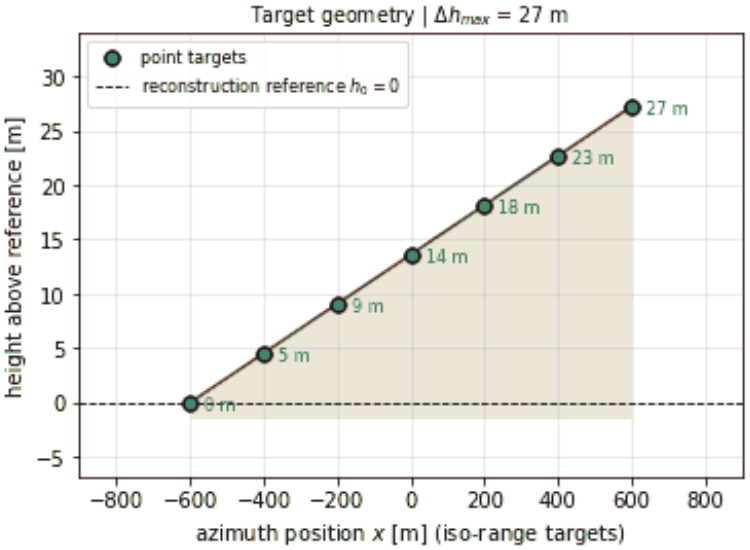



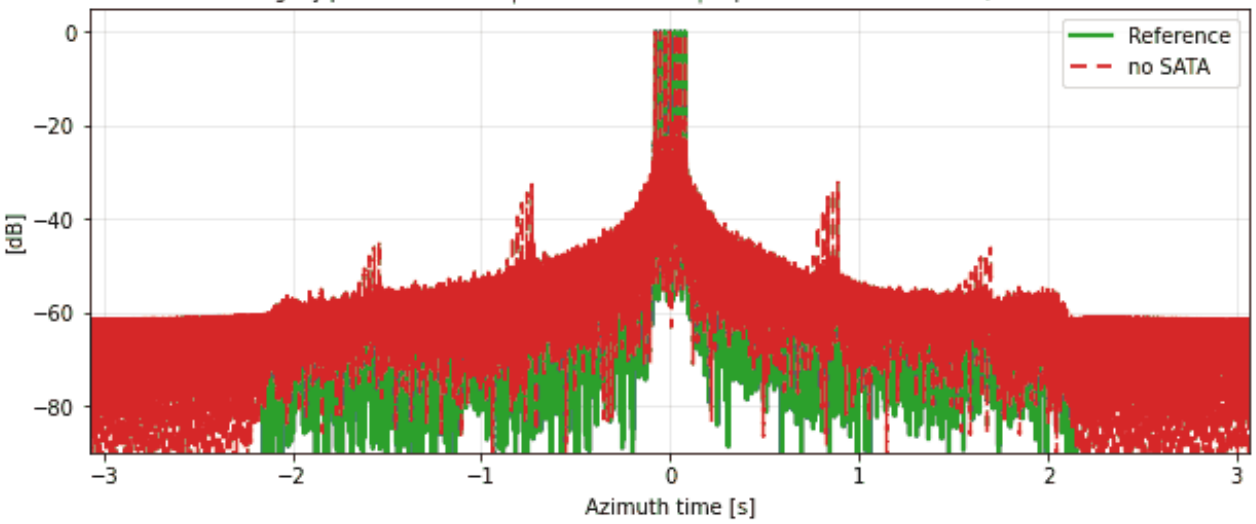



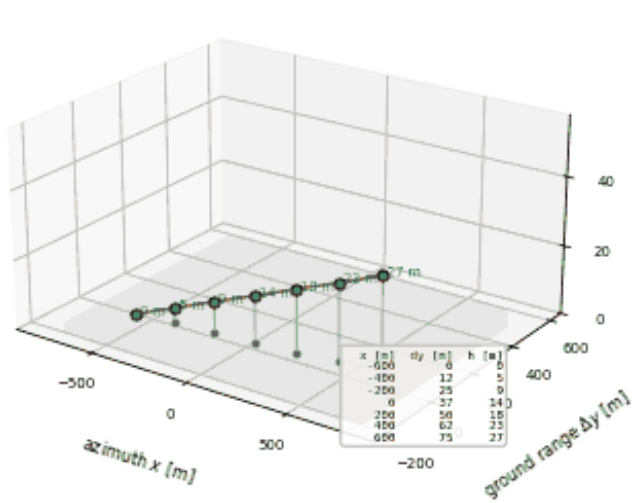
RA-SL-040 | SATA 1D | along-track ramp: N = 7, $\alpha = 0.1°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

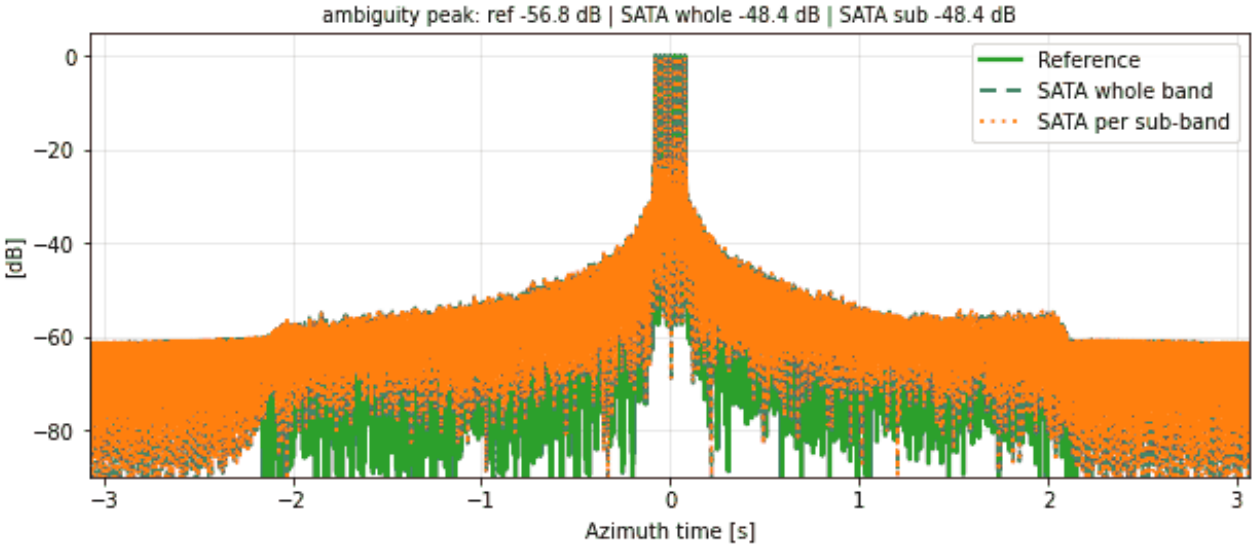






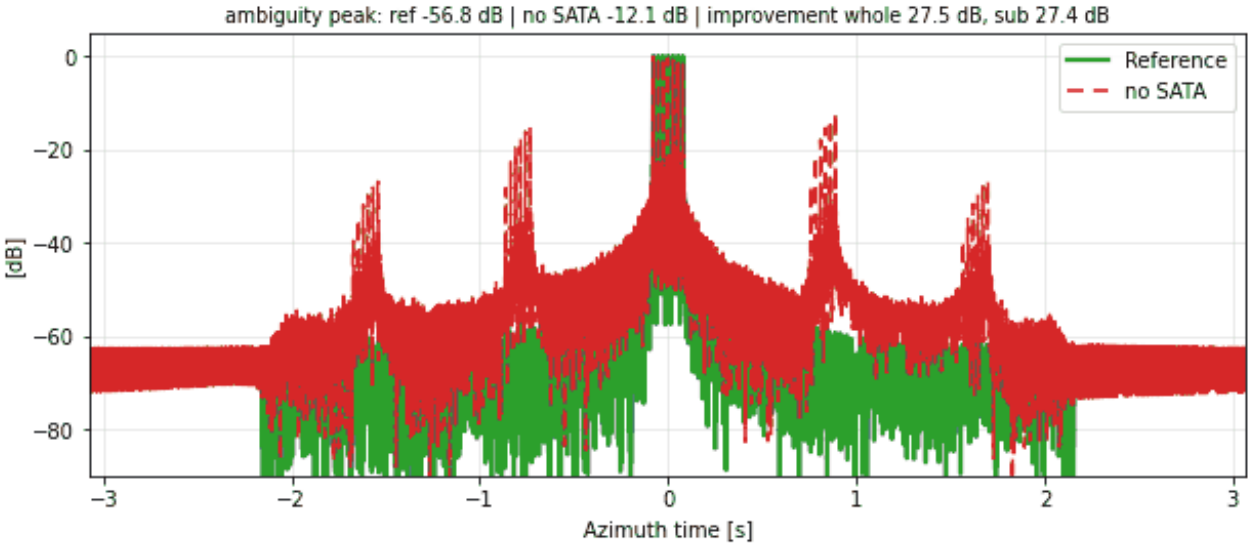



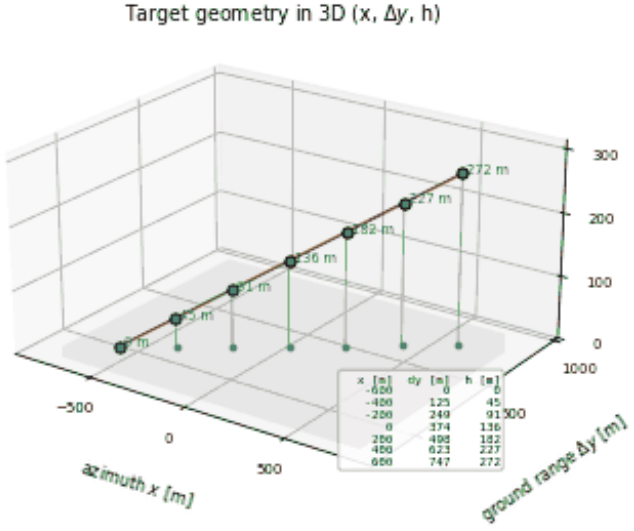



RA-SL-041 | SATA 1D | along-track ramp: N = 7, $\alpha = 1°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

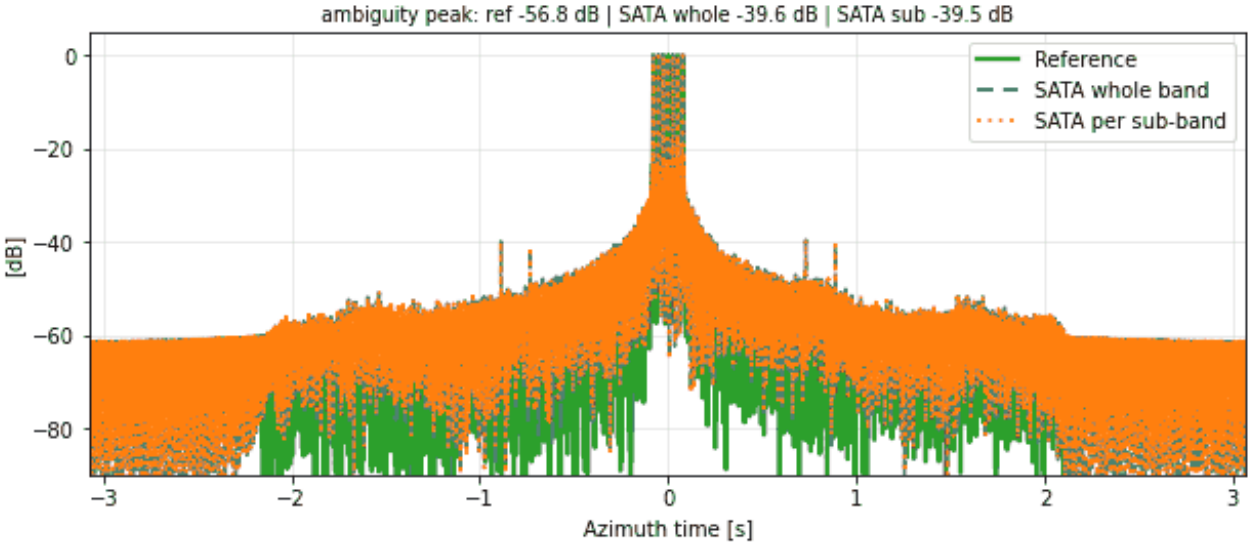

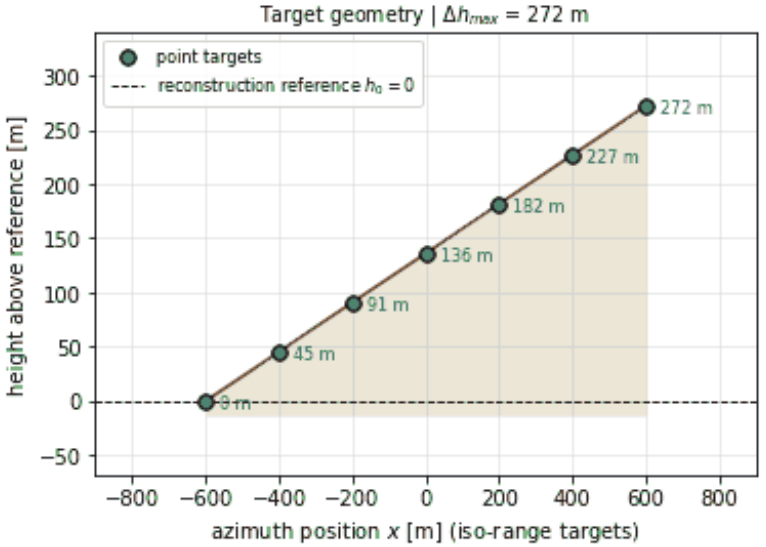



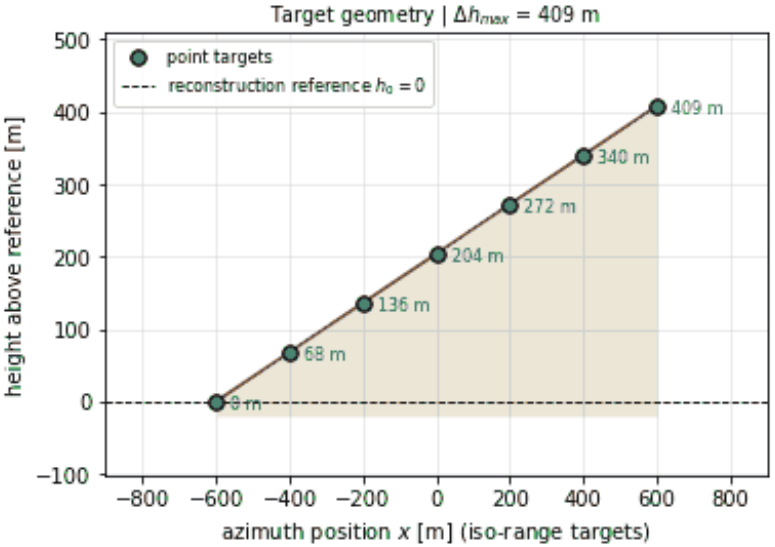



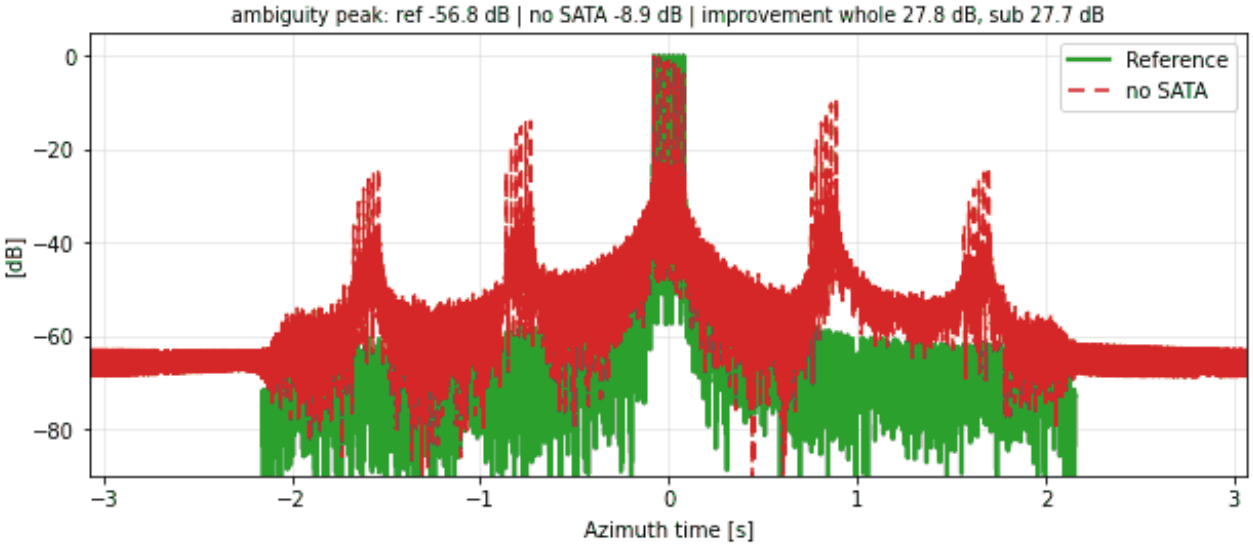



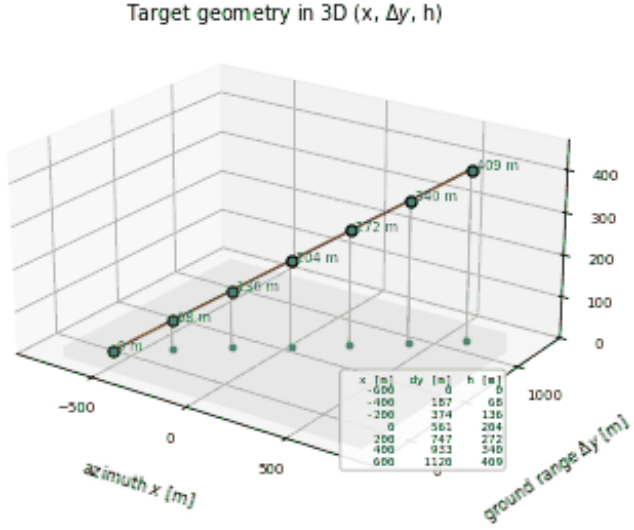
RA-SL-042 | SATA 1D | along-track ramp: N = 7, $\alpha = 1.5^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

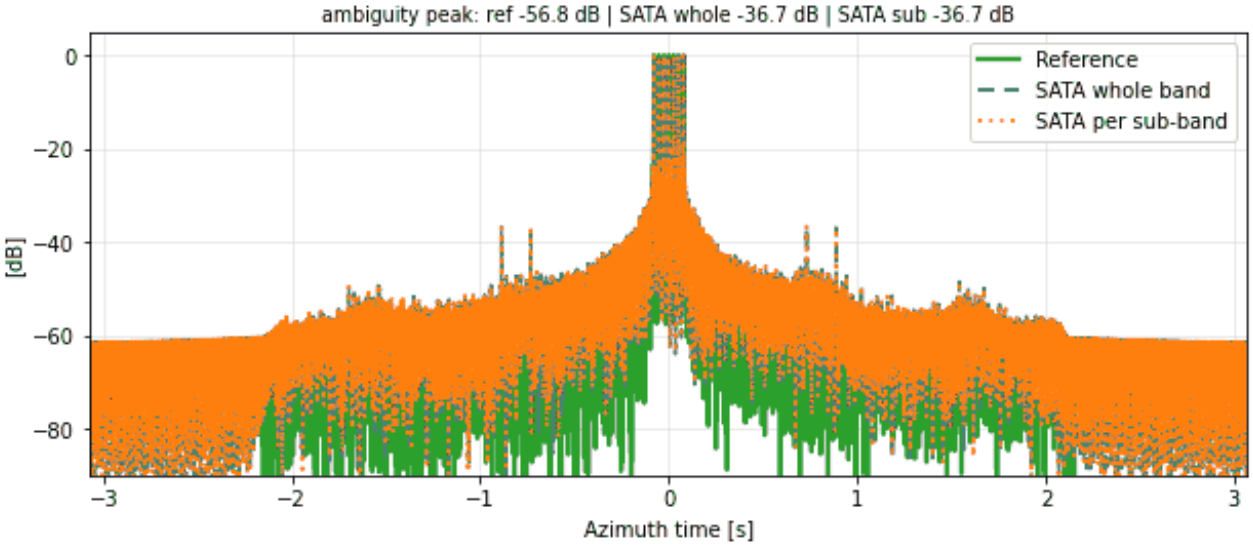






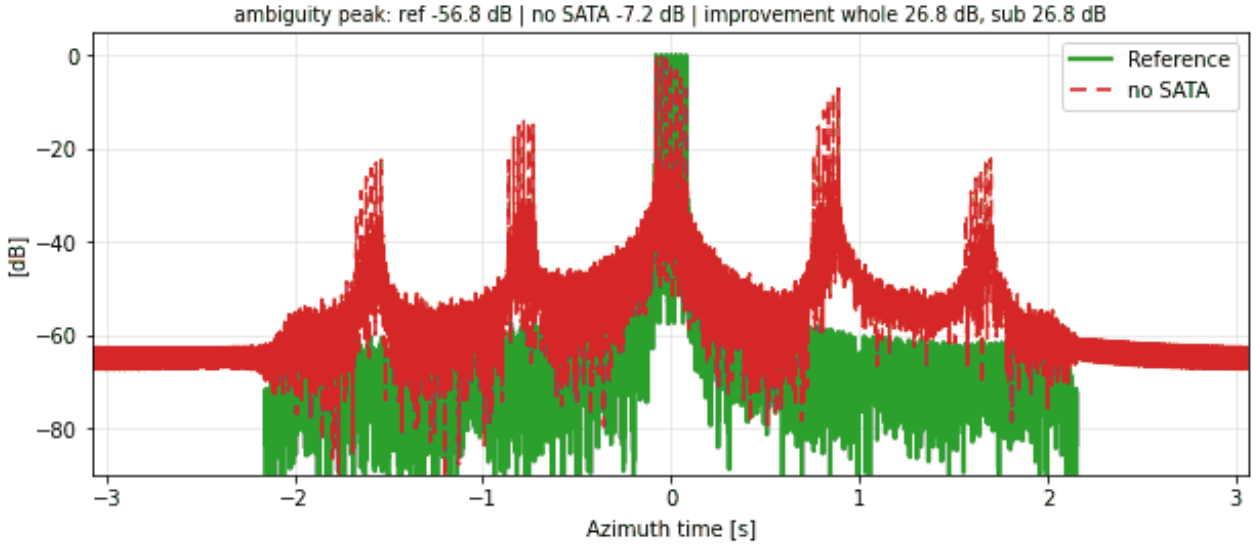



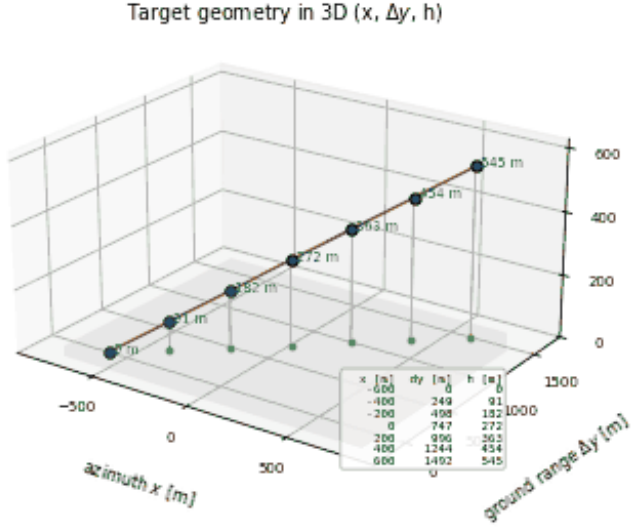



RA-SL-043 | SATA 1D | along-track ramp: N = 7, $\alpha = 2°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a = 1235$ Hz | $\Delta b_{at} = 7.69$ m (DPCA)

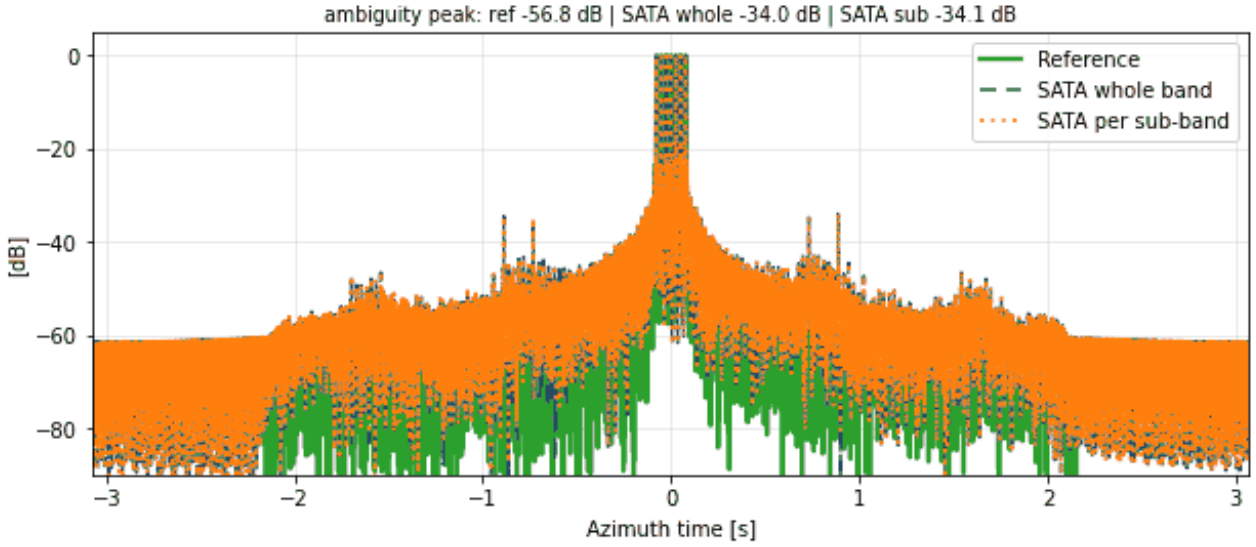


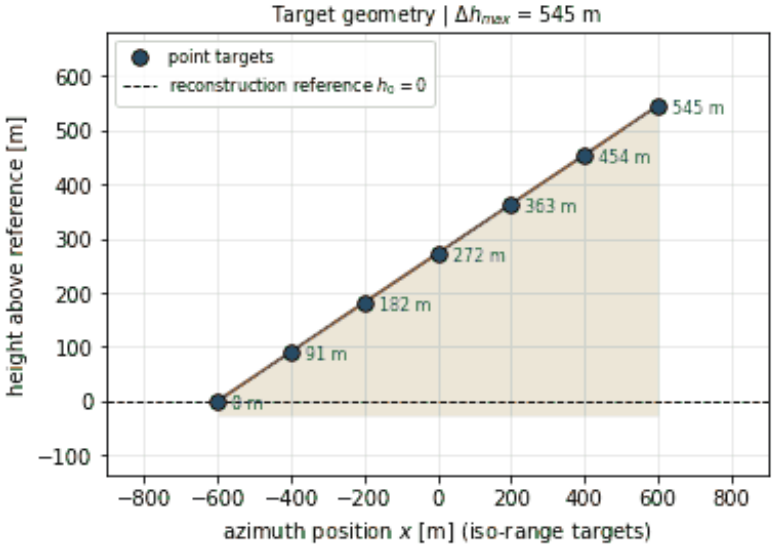



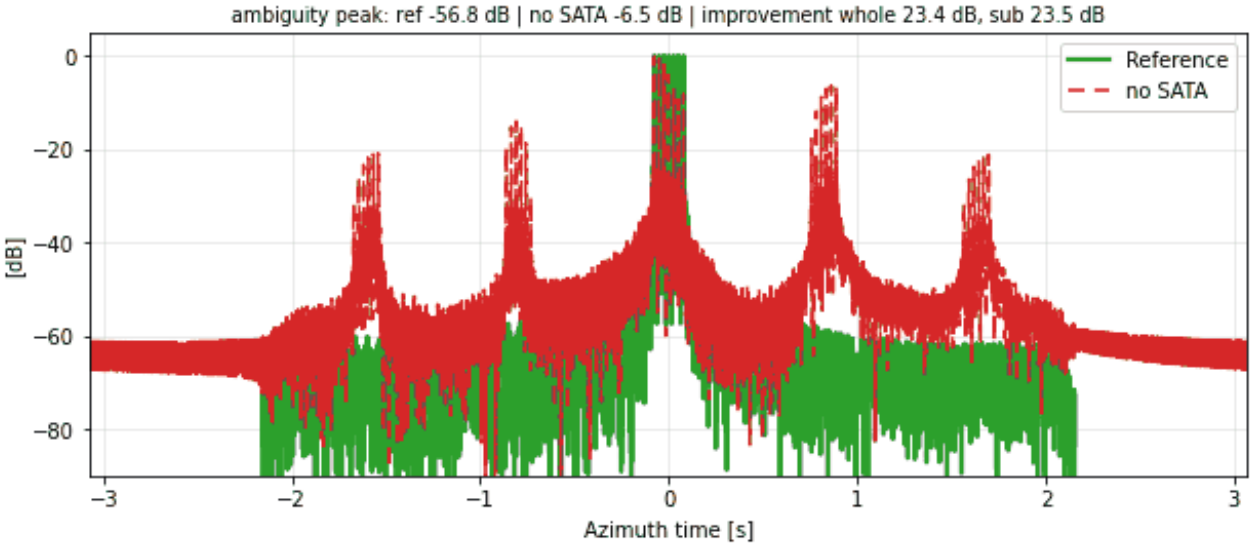



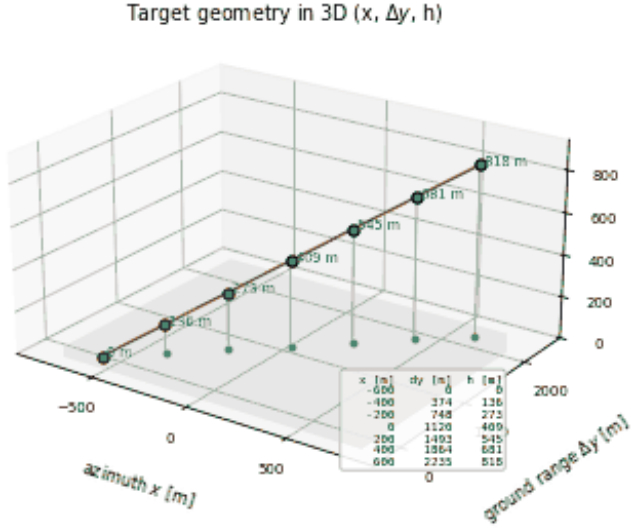



RA-SL-044 | SATA 1D | along-track ramp: N = 7, $\alpha = 3°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

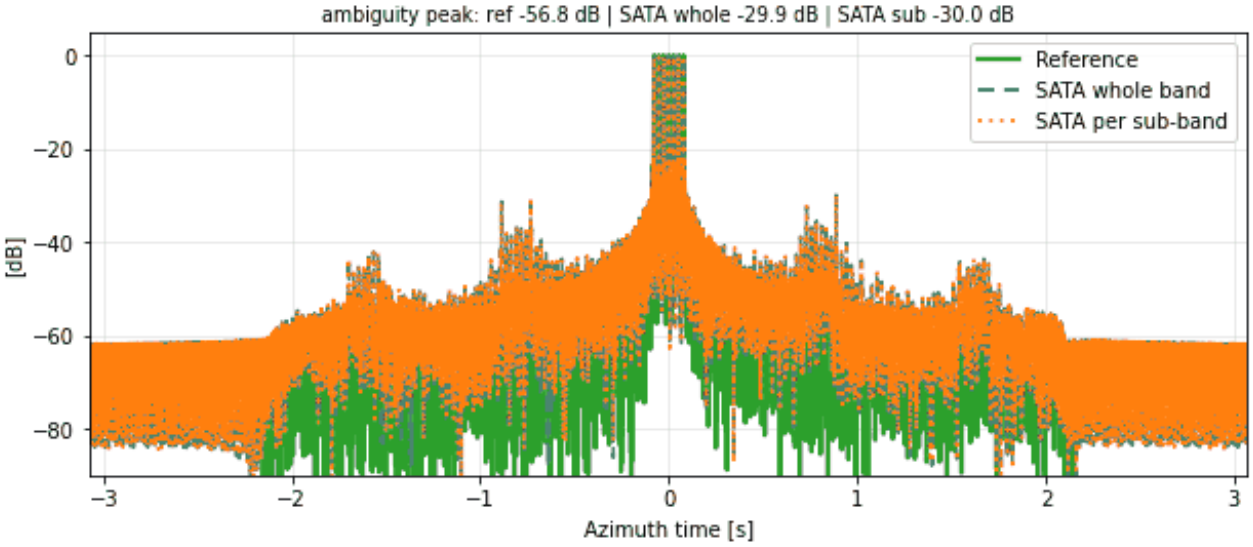

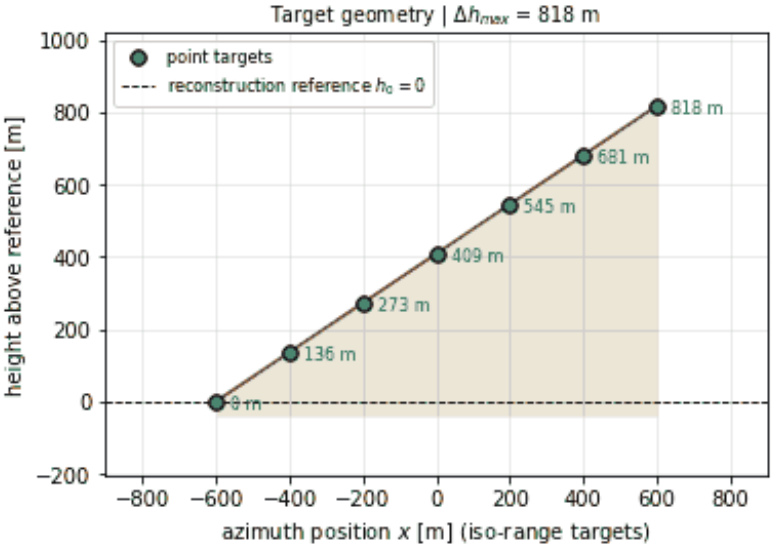



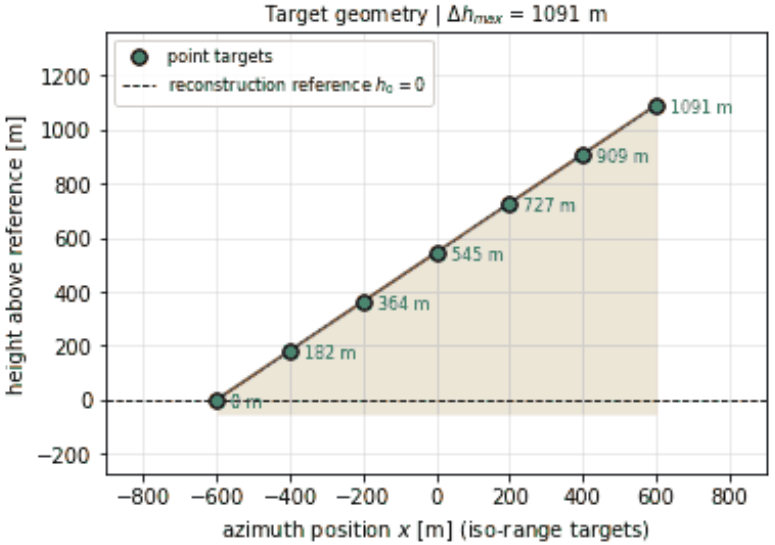



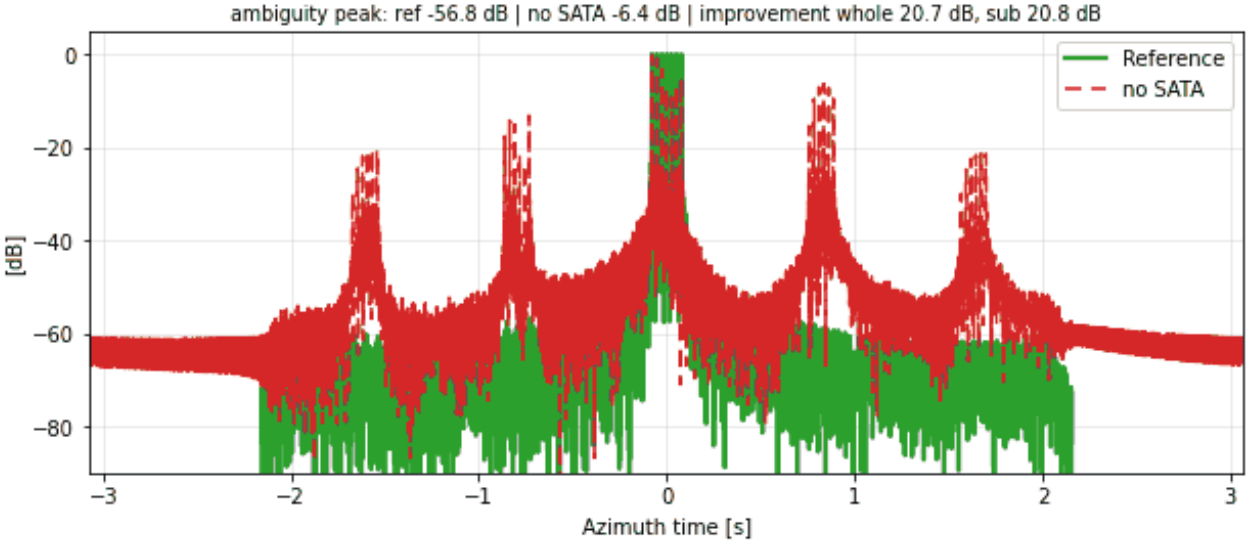



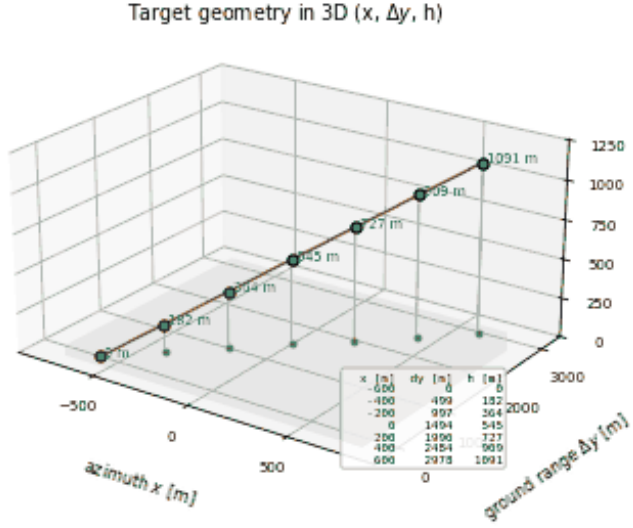
RA-SL-045 | SATA 1D | along-track ramp: N = 7, $\alpha = 4°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

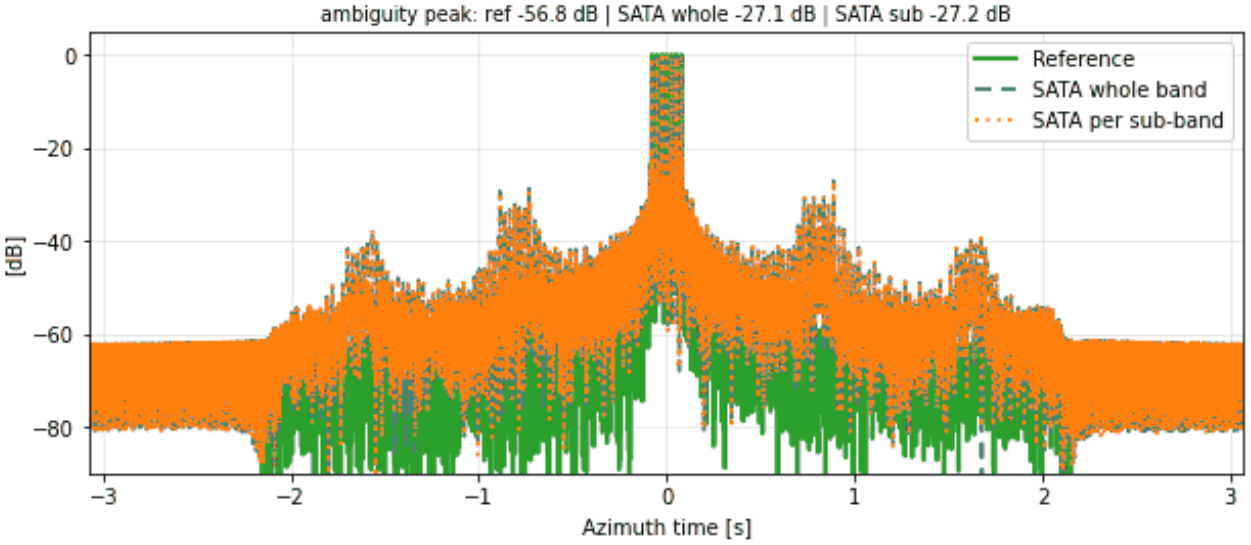






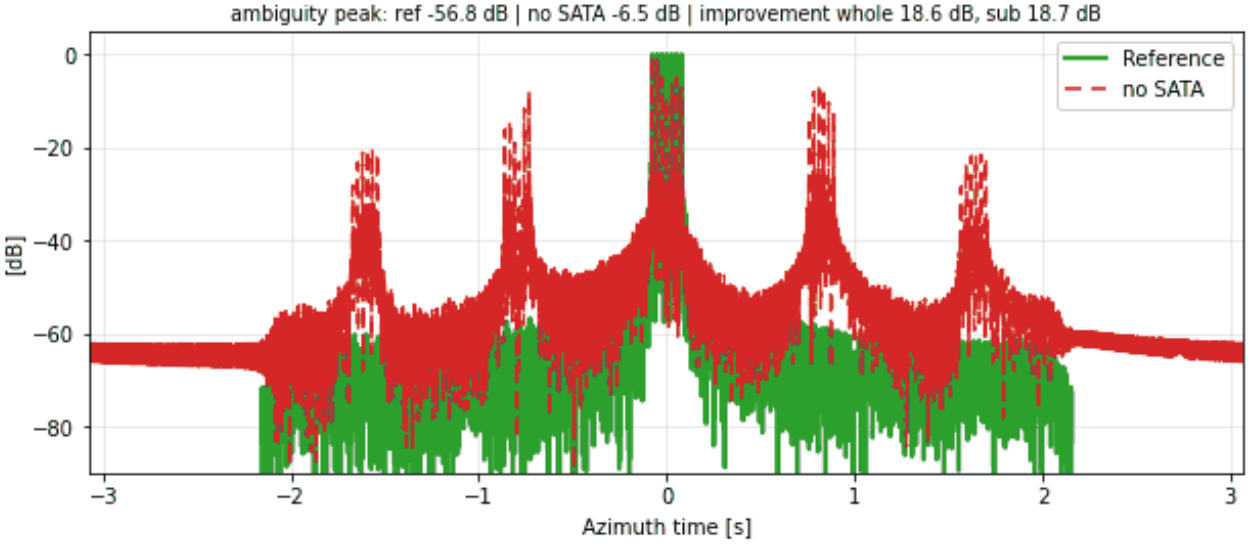



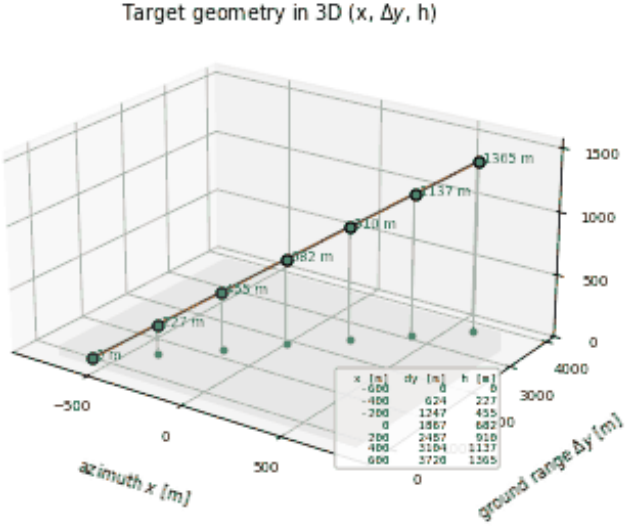



RA-SL-046 | SATA 1D | along-track ramp: N = 7, $\alpha = 5^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

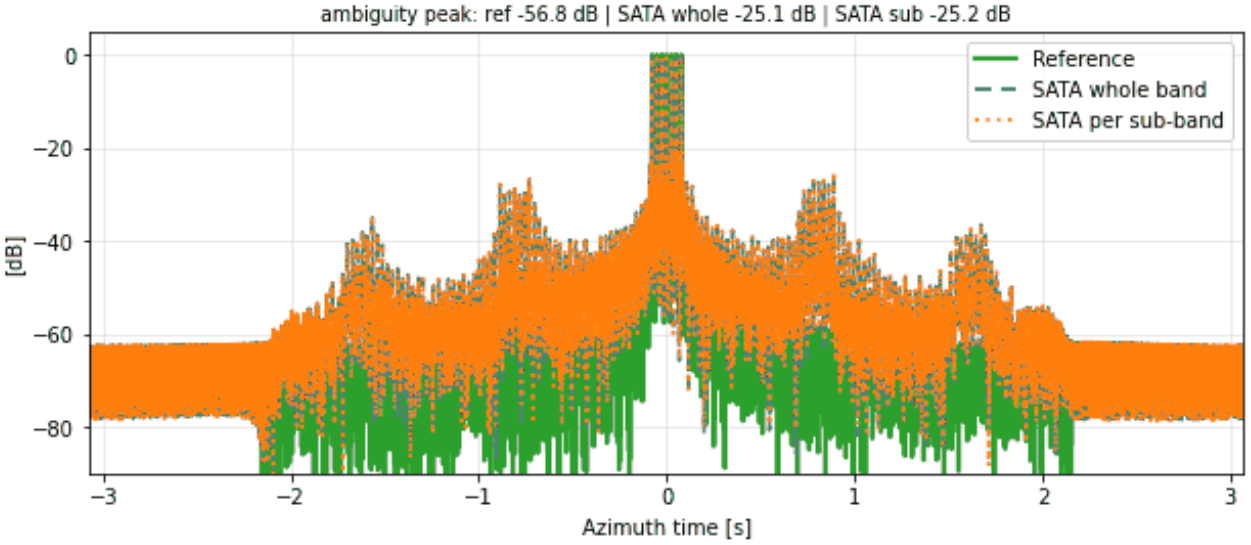


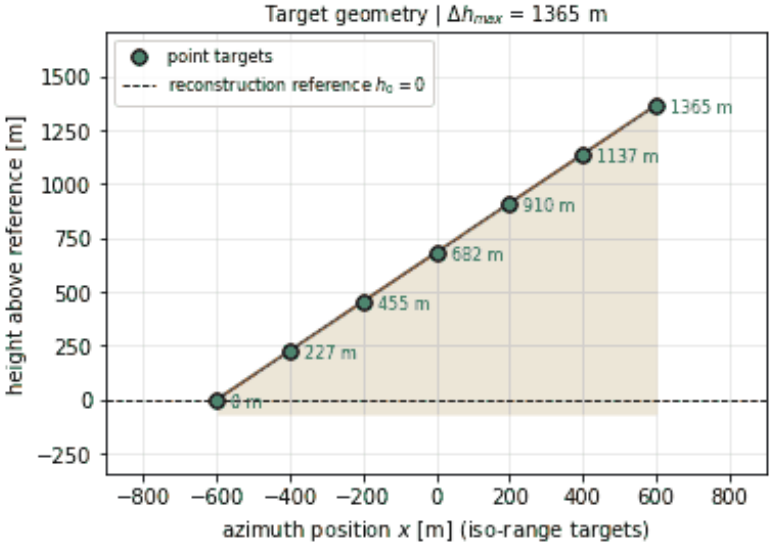



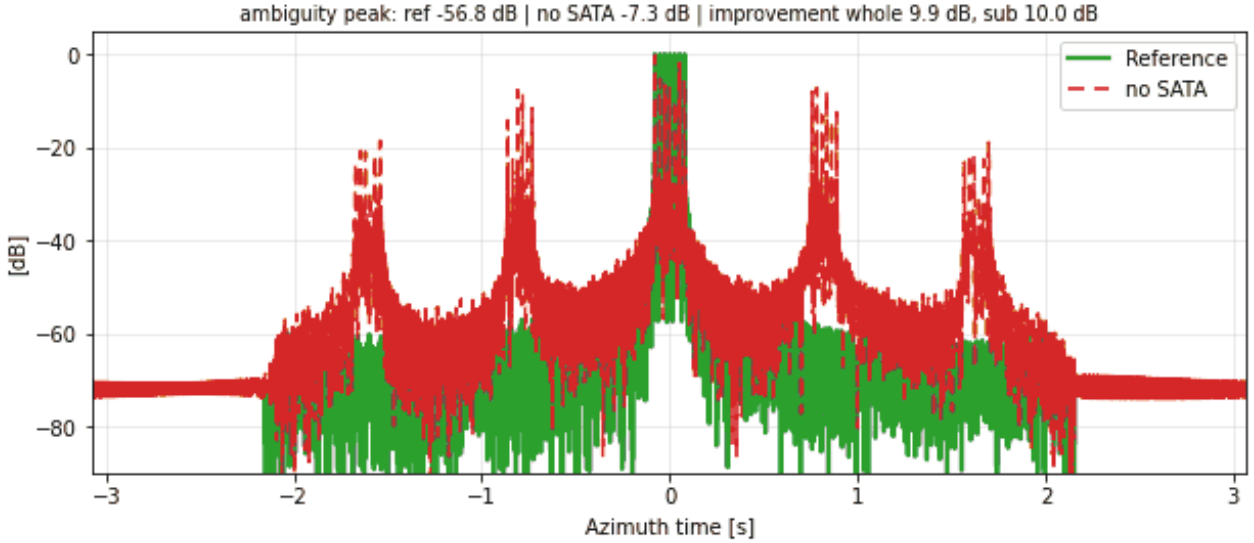



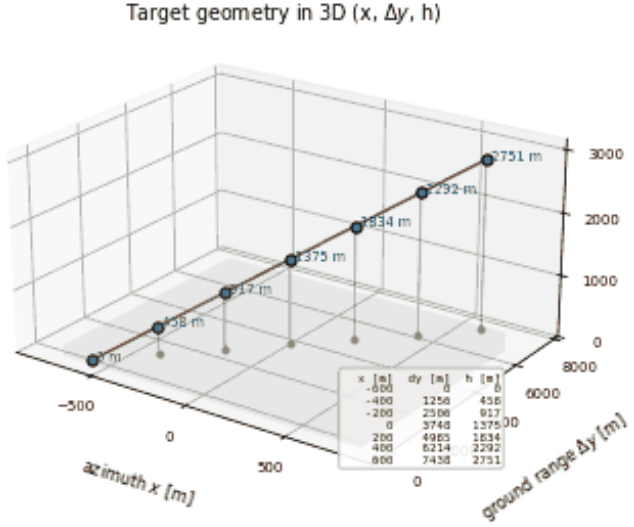



RA-SL-047 | SATA 1D | along-track ramp: N = 7, $\alpha = 10^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

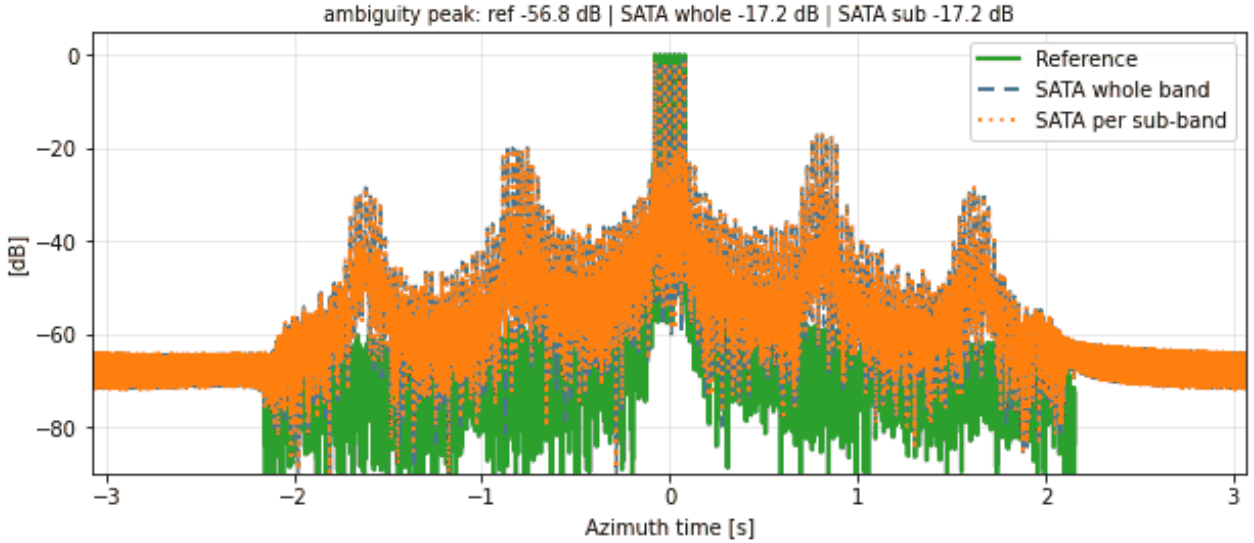

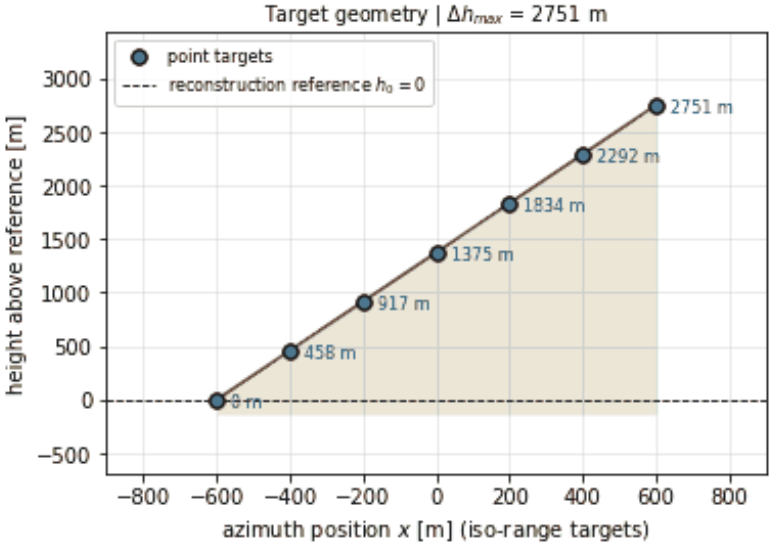



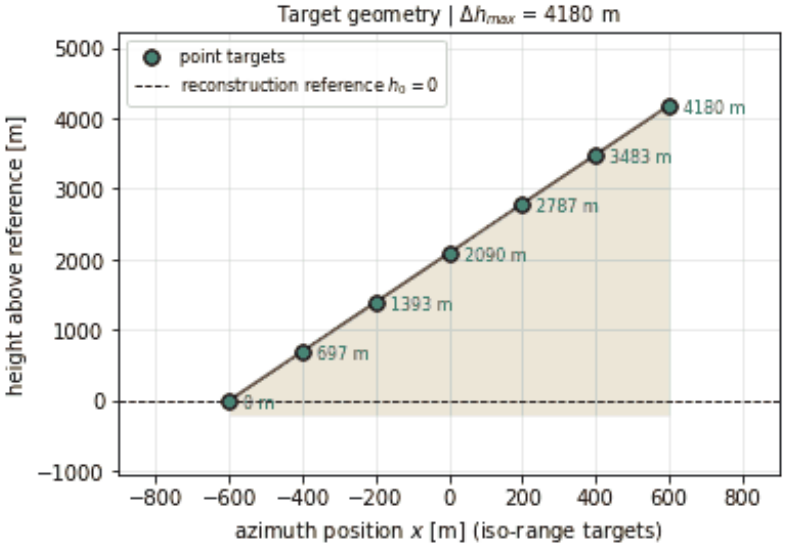



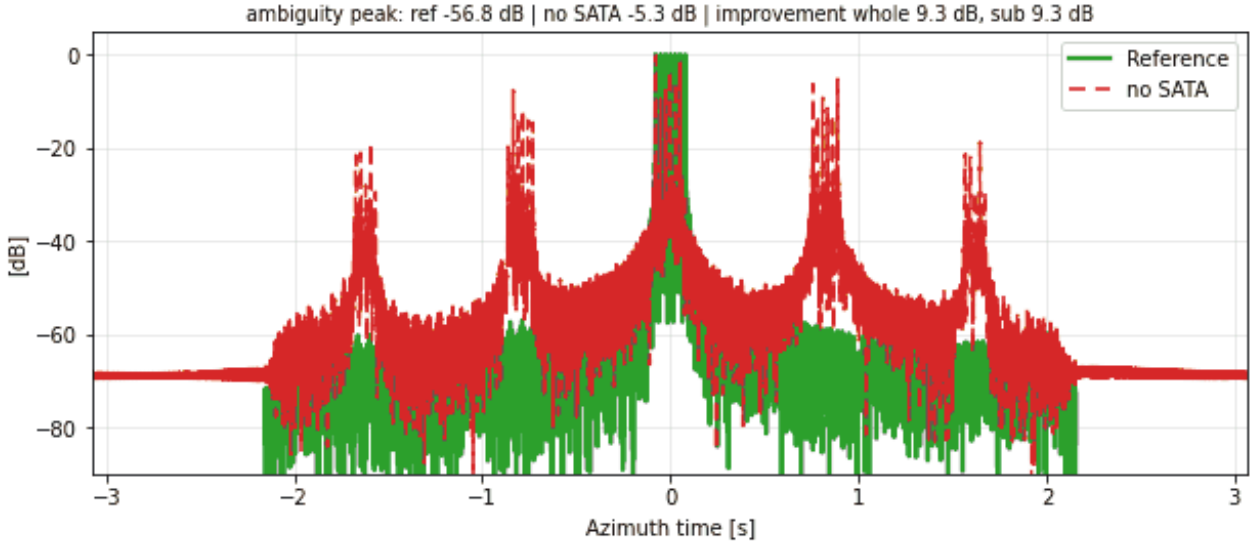



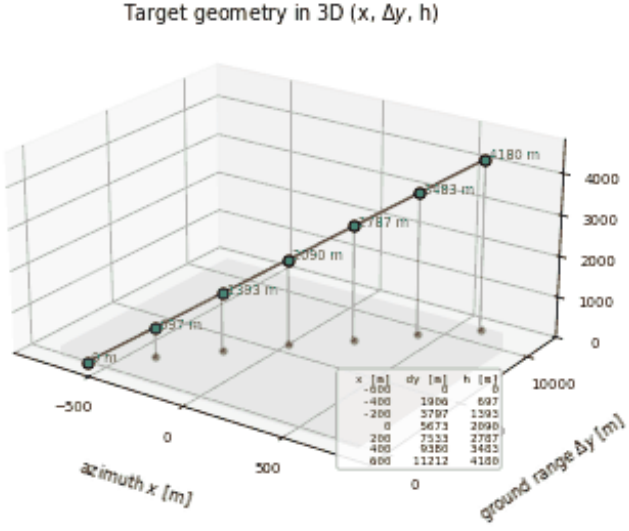
RA-SL-048 | SATA 1D | along-track ramp: N = 7, $\alpha = 15°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

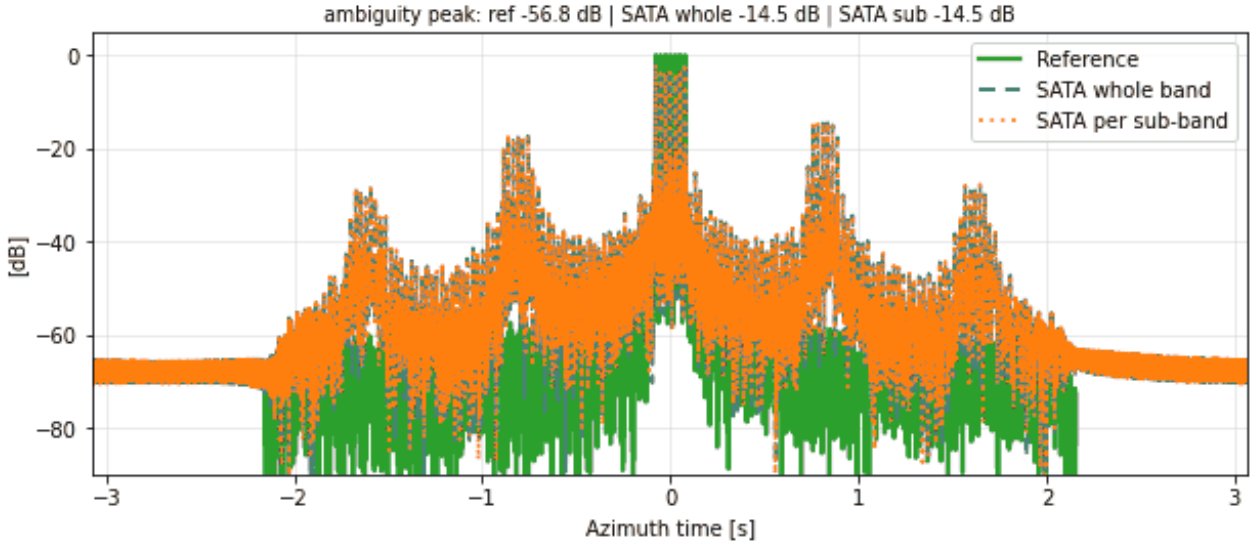





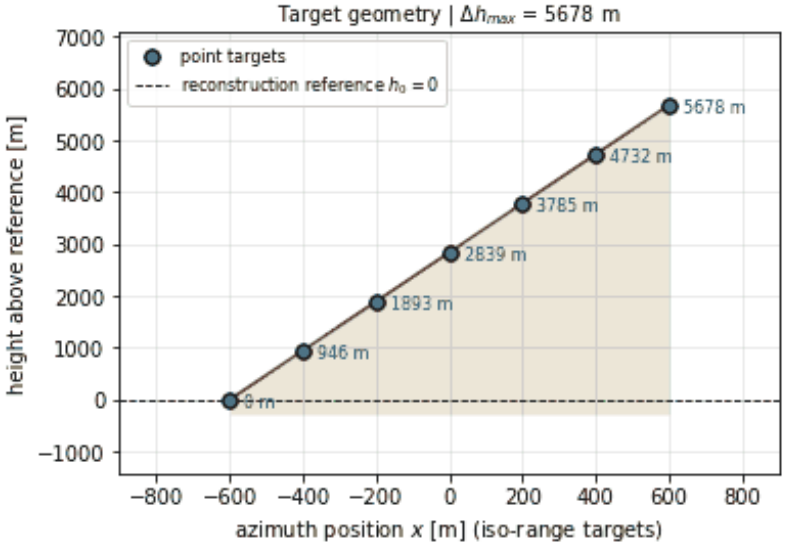



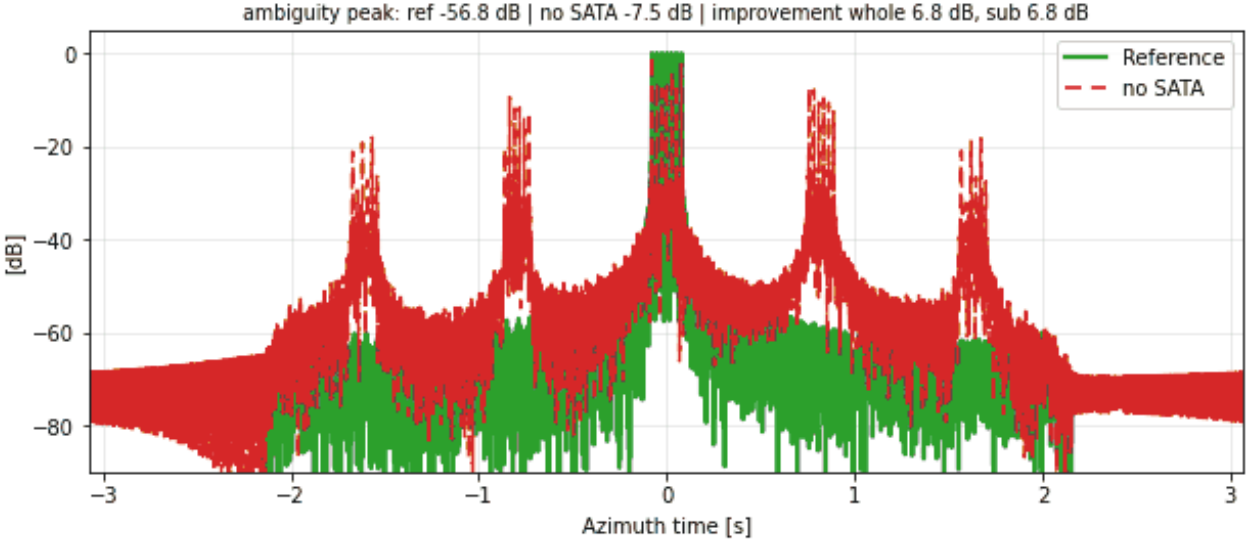



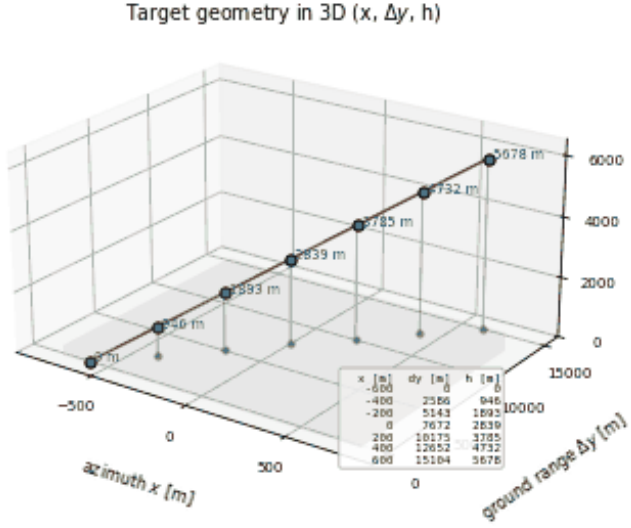
RA-SL-049 | SATA 1D | along-track ramp: N = 7, $\alpha = 20°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

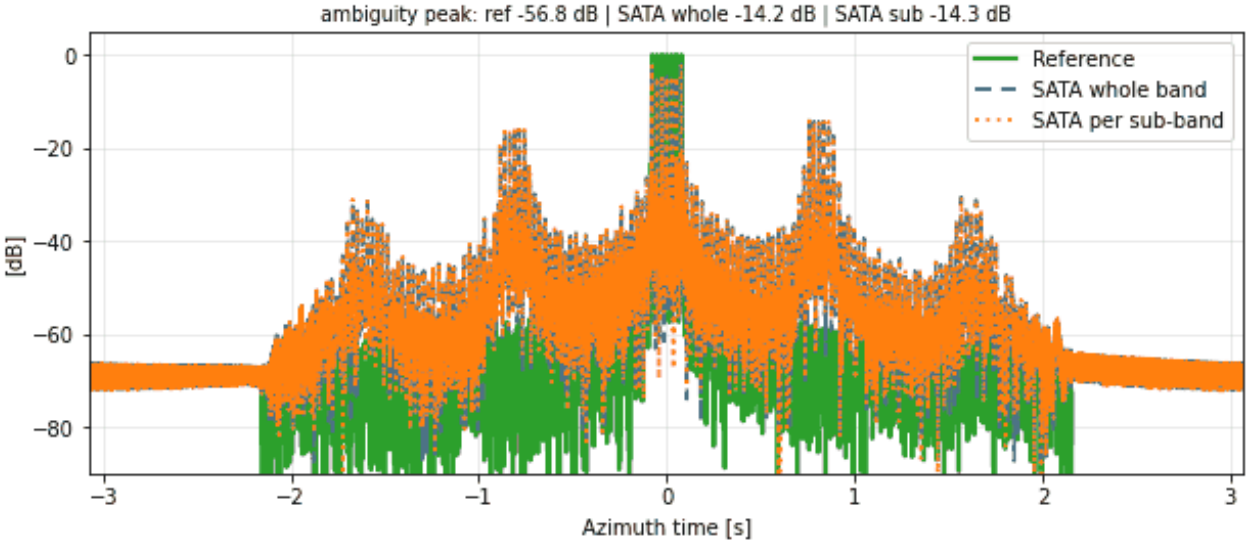





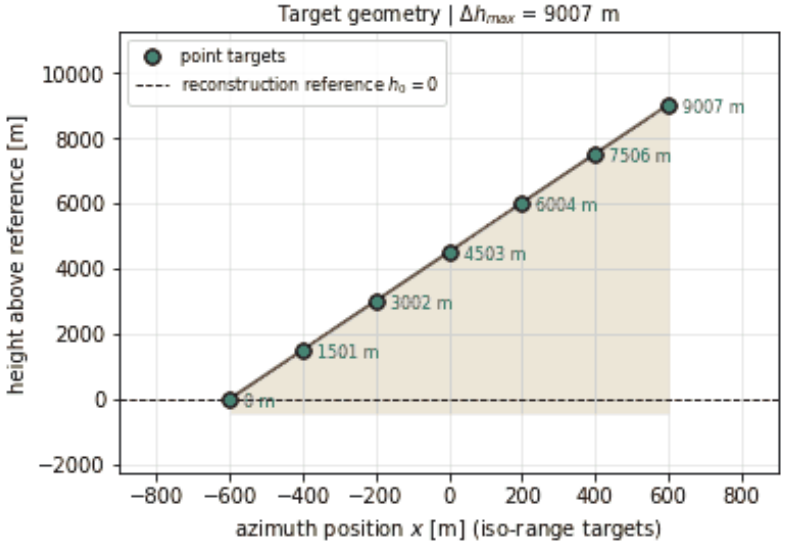



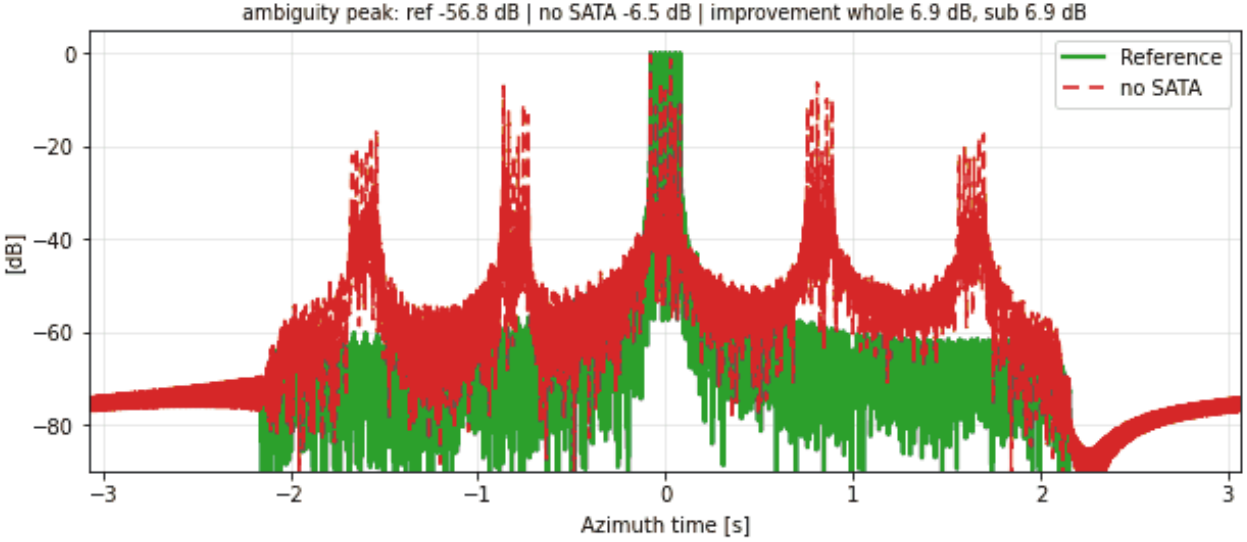



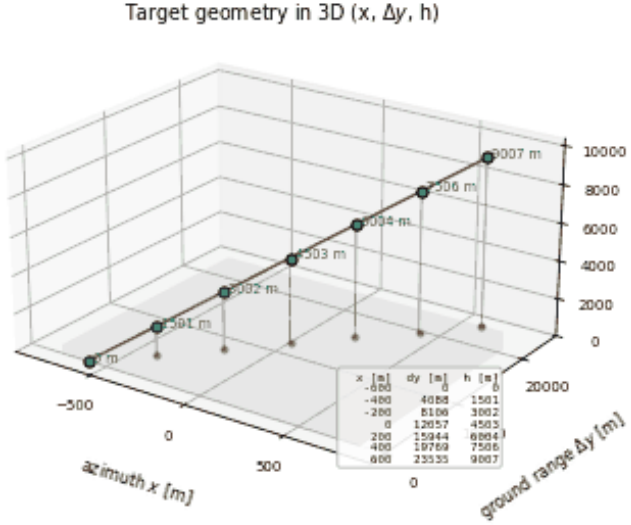
RA-SL-050 | SATA 1D | along-track ramp: N = 7, $\alpha = 30°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a = 1235$ Hz | $\Delta b_{at} = 7.69$ m (DPCA)

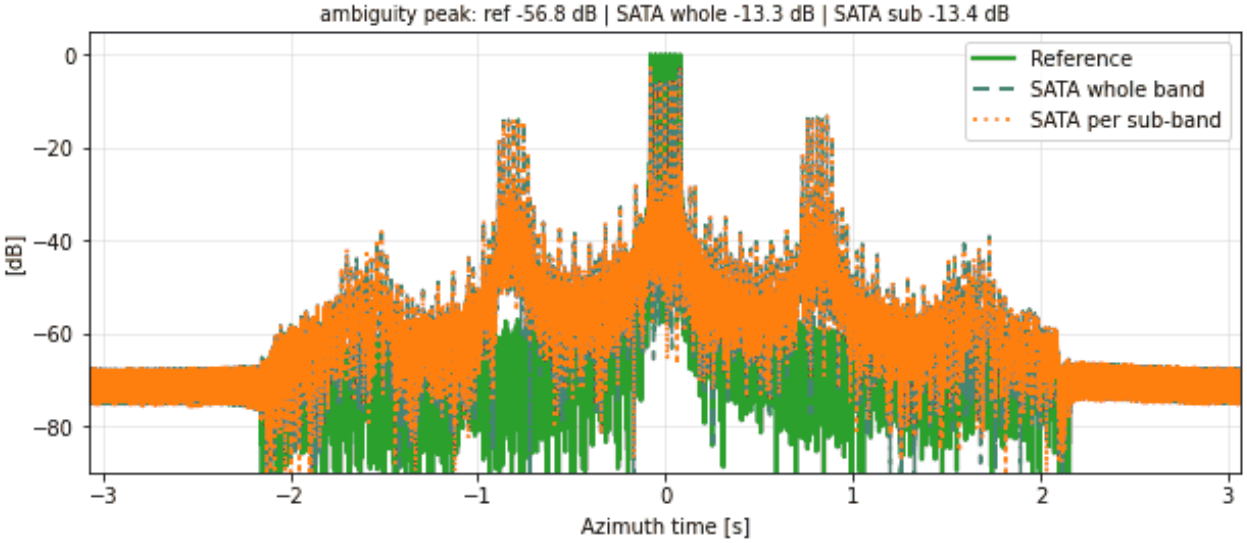





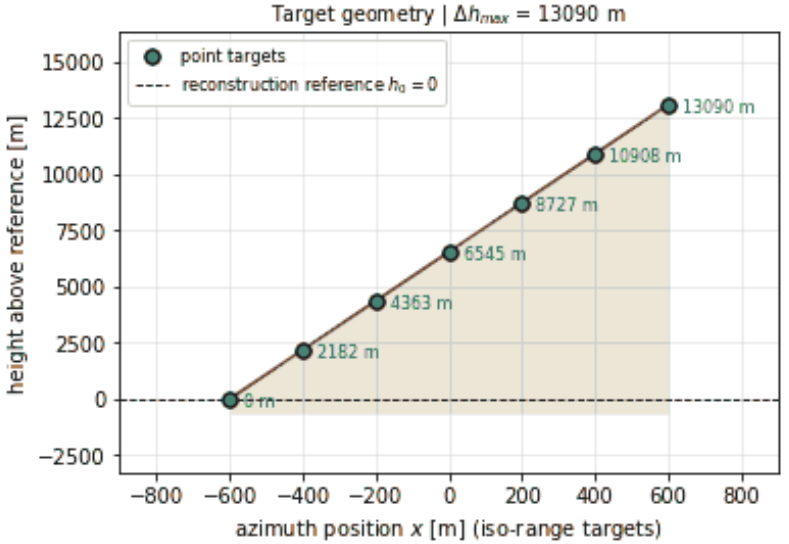



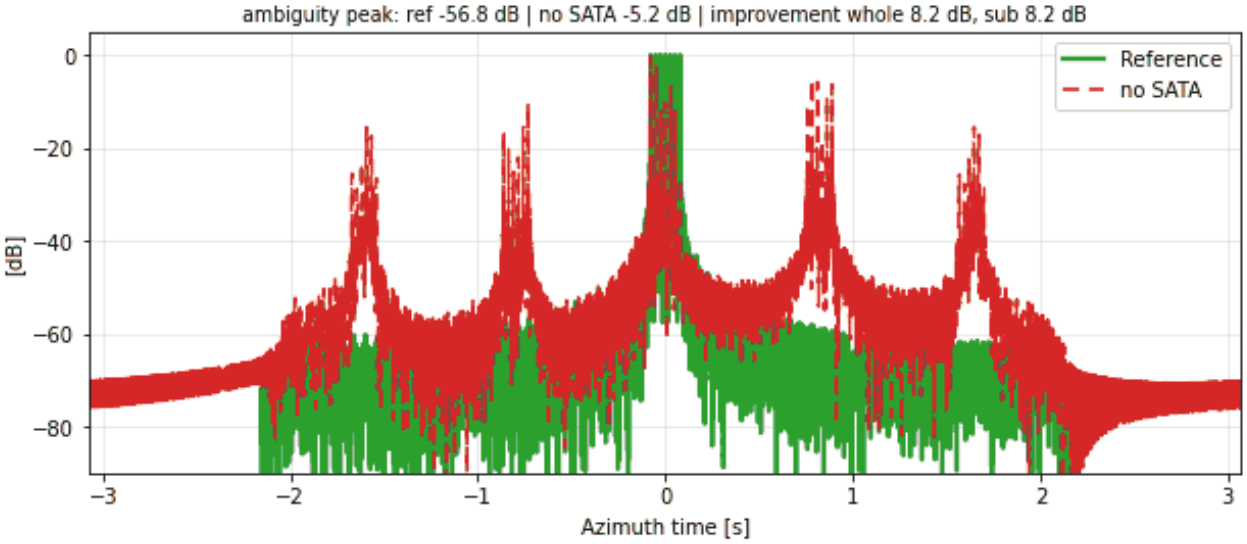



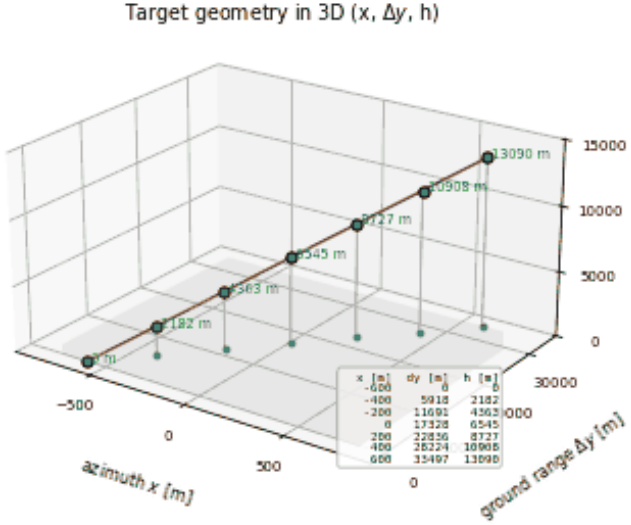
RA-SL-051 | SATA 1D | along-track ramp: N = 7, $\alpha = 40°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

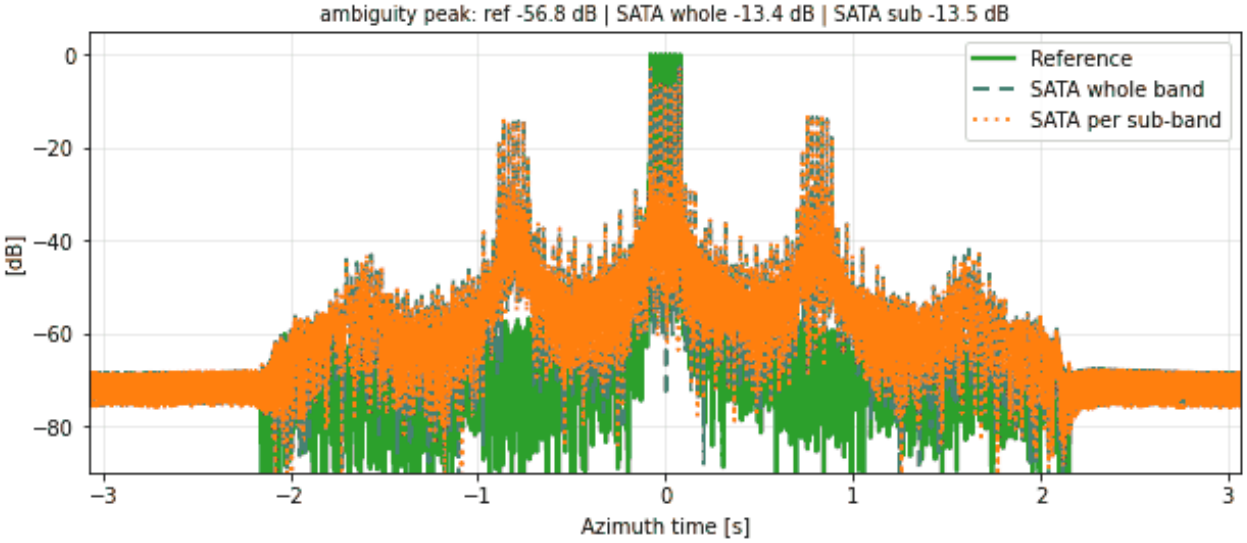





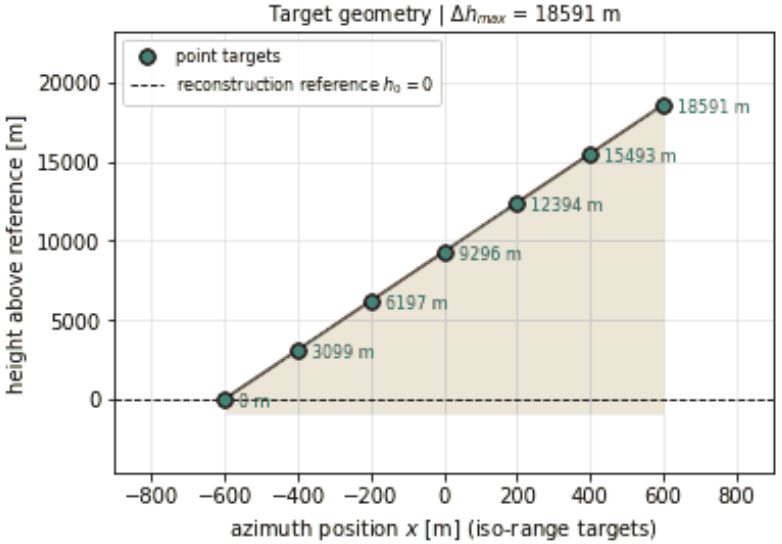



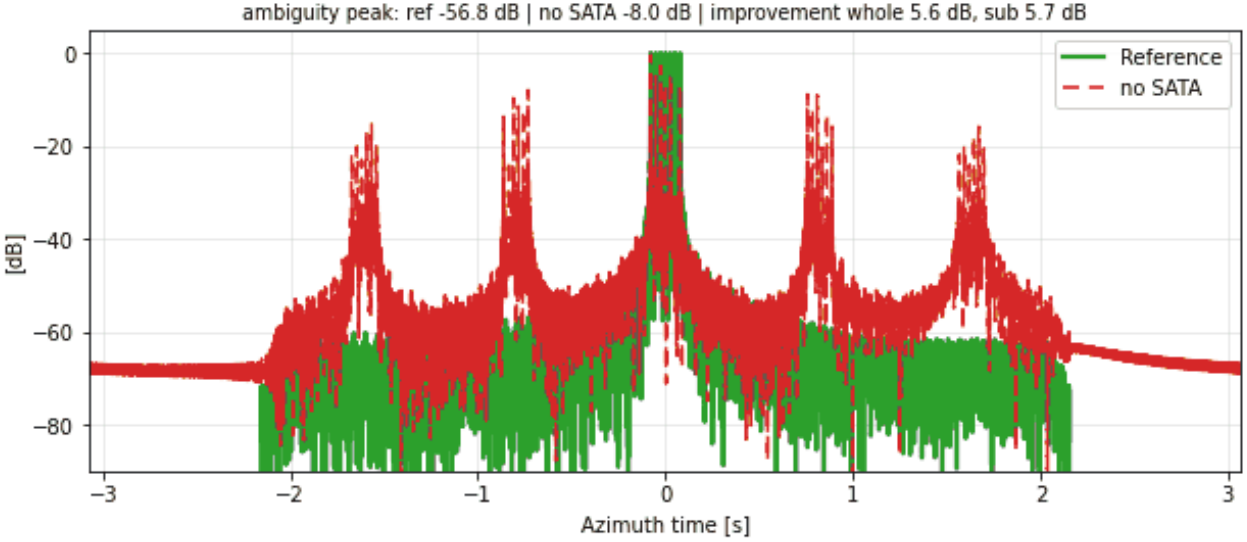



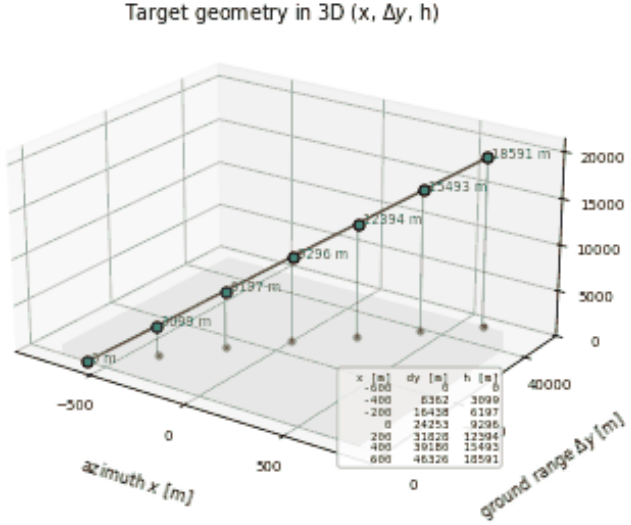
RA-SL-052 | SATA 1D | along-track ramp: N = 7, $\alpha = 50°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a = 1235$ Hz | $\Delta b_{at} = 7.69$ m (DPCA)

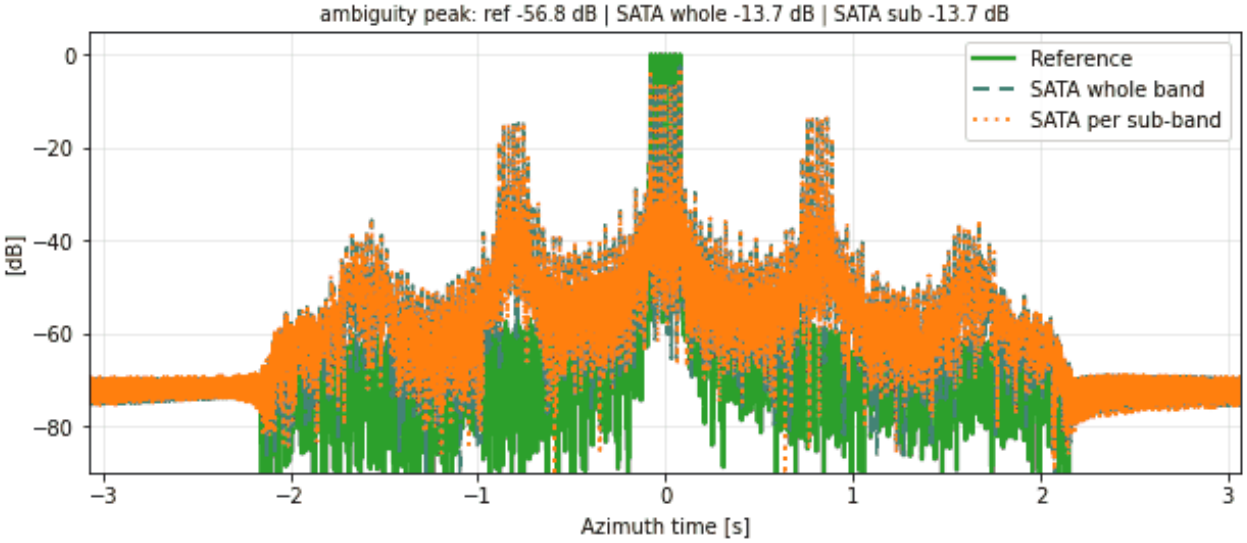






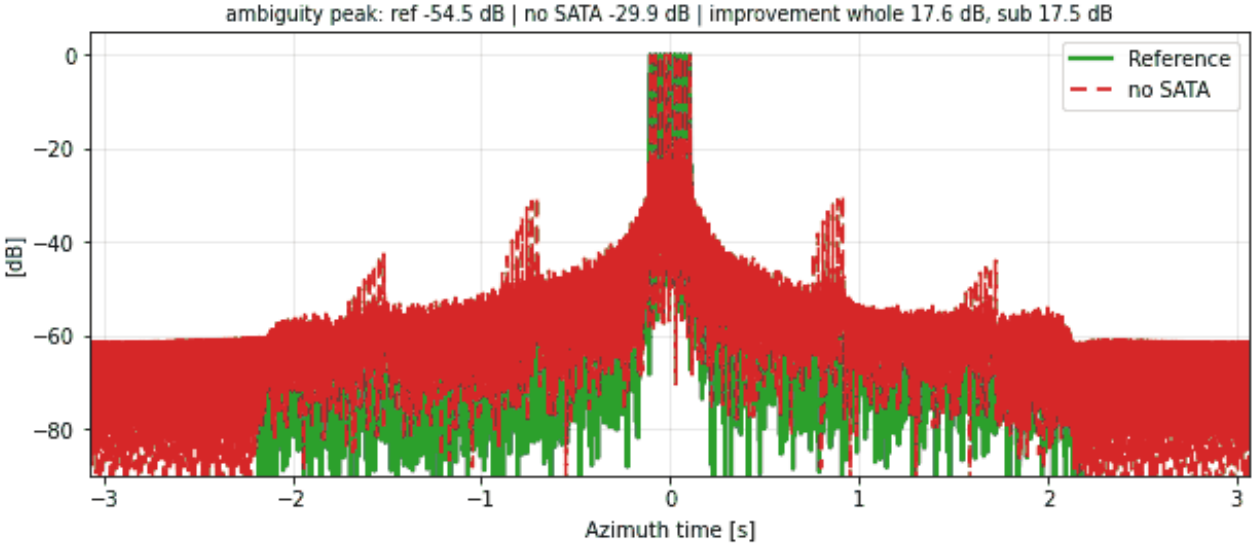



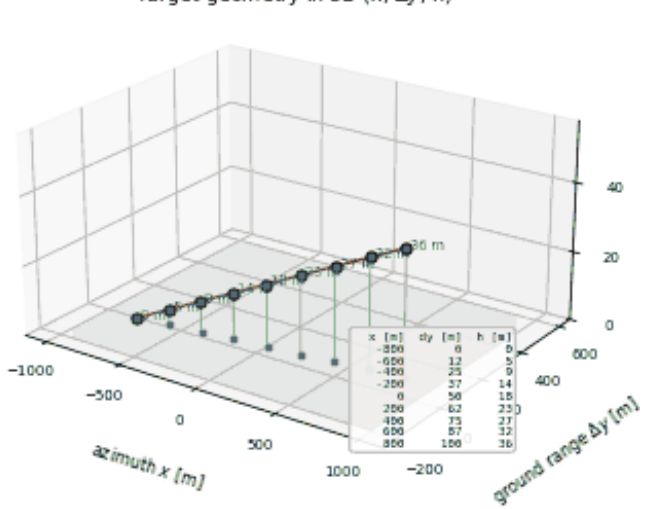



RA-SL-053 | SATA 1D | along-track ramp: N = 9, $\alpha = 0.1°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

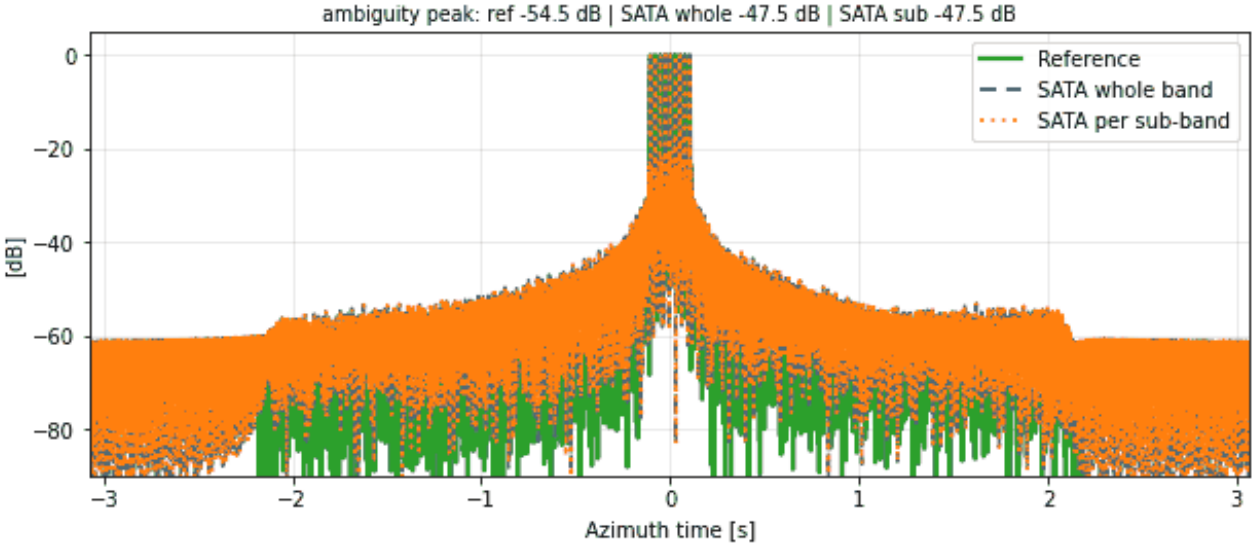


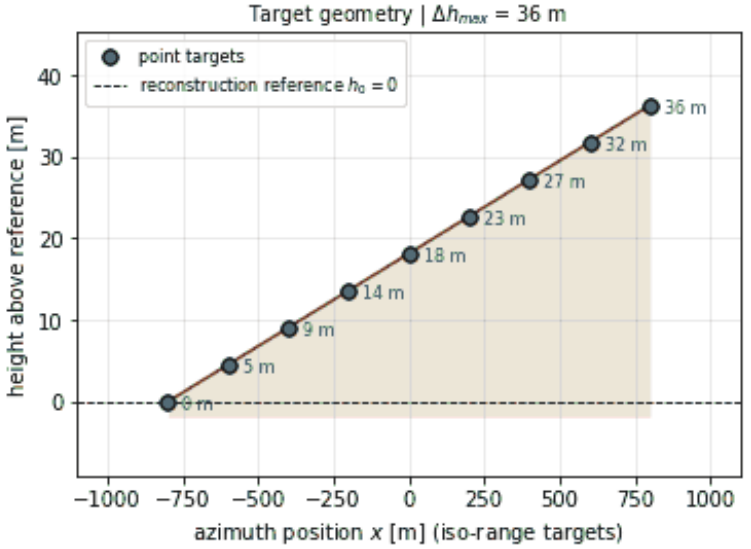



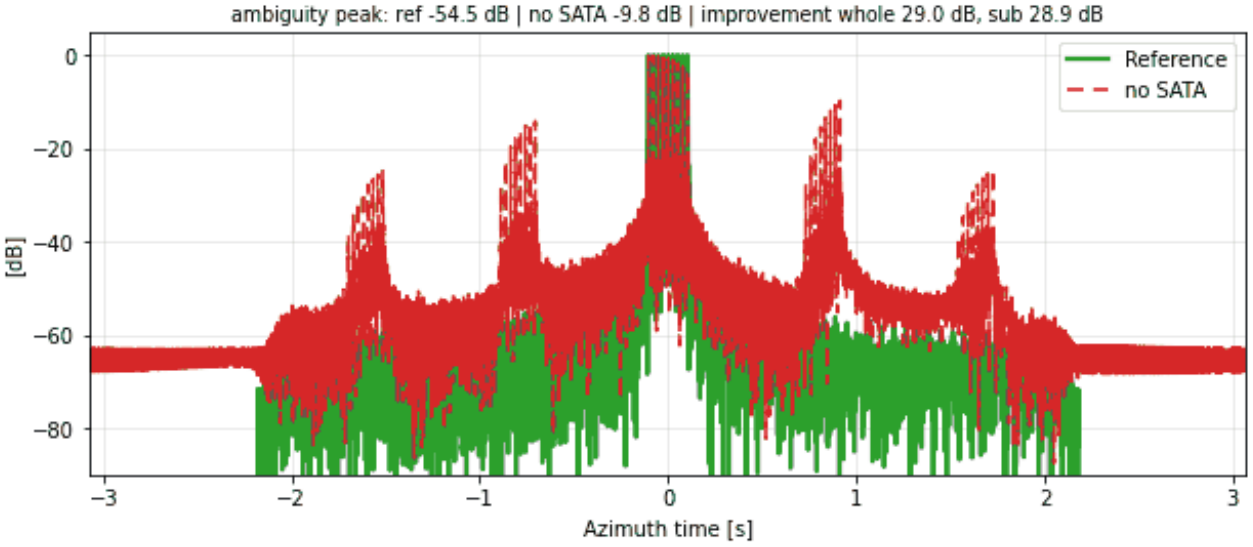



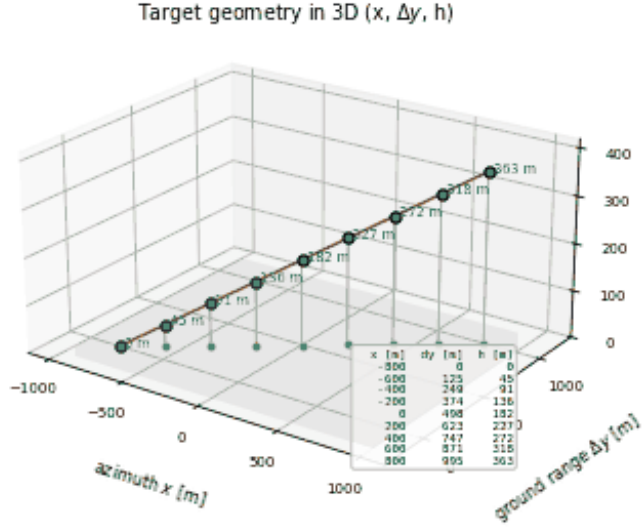



RA-SL-054 | SATA 1D | along-track ramp: N = 9, $\alpha = 1°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

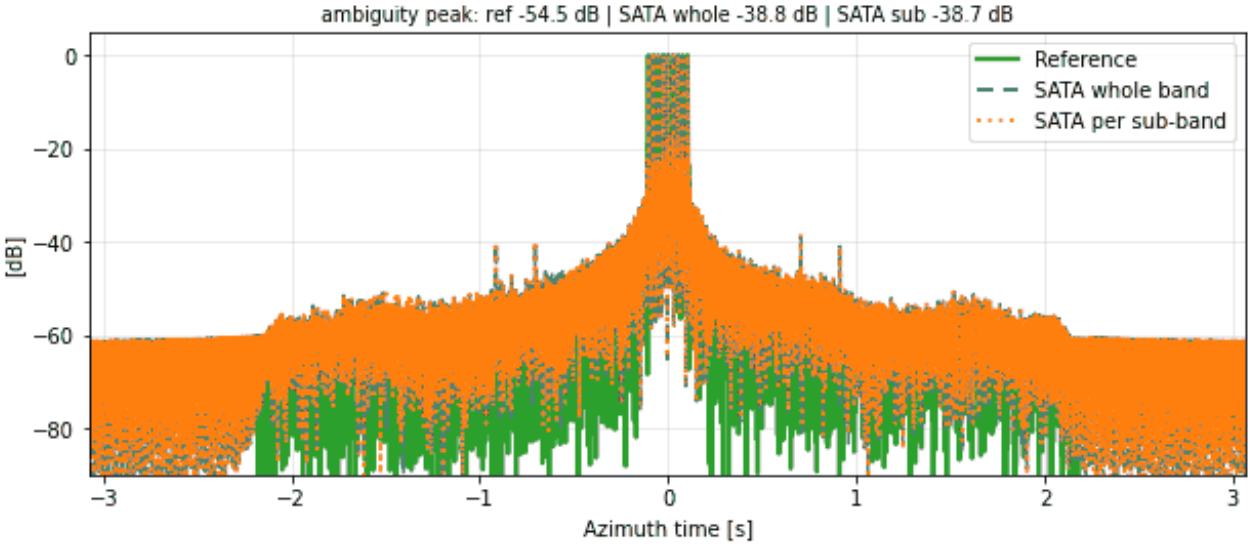

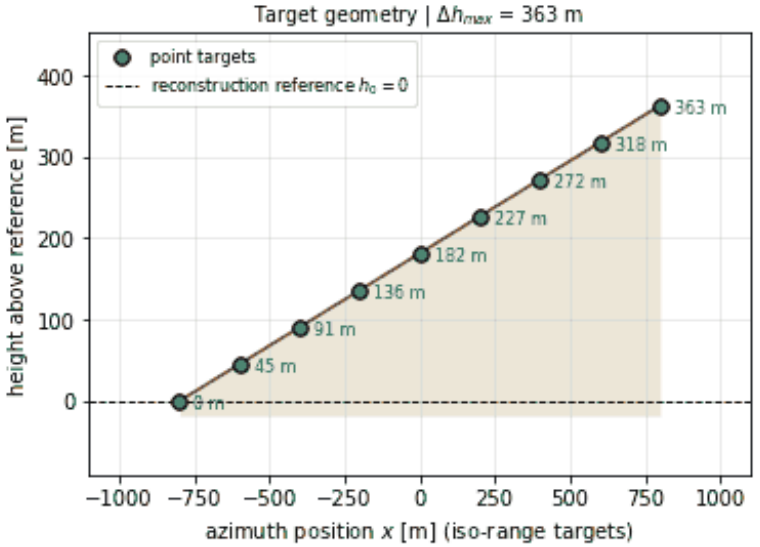



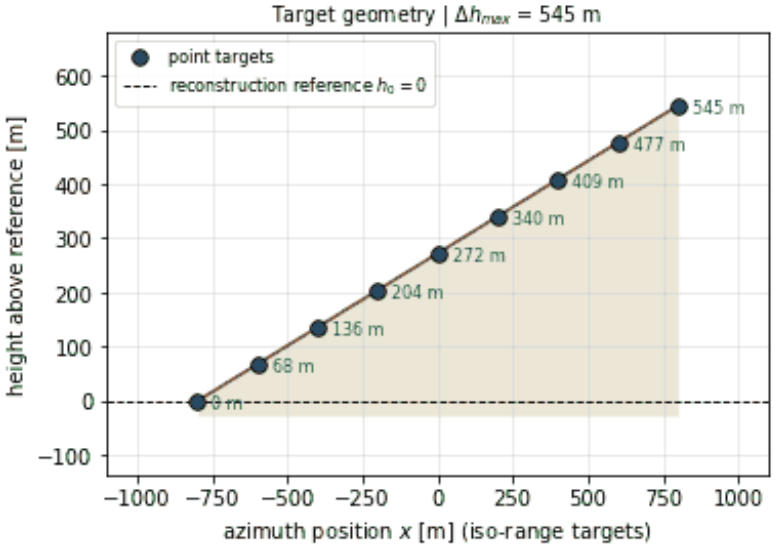



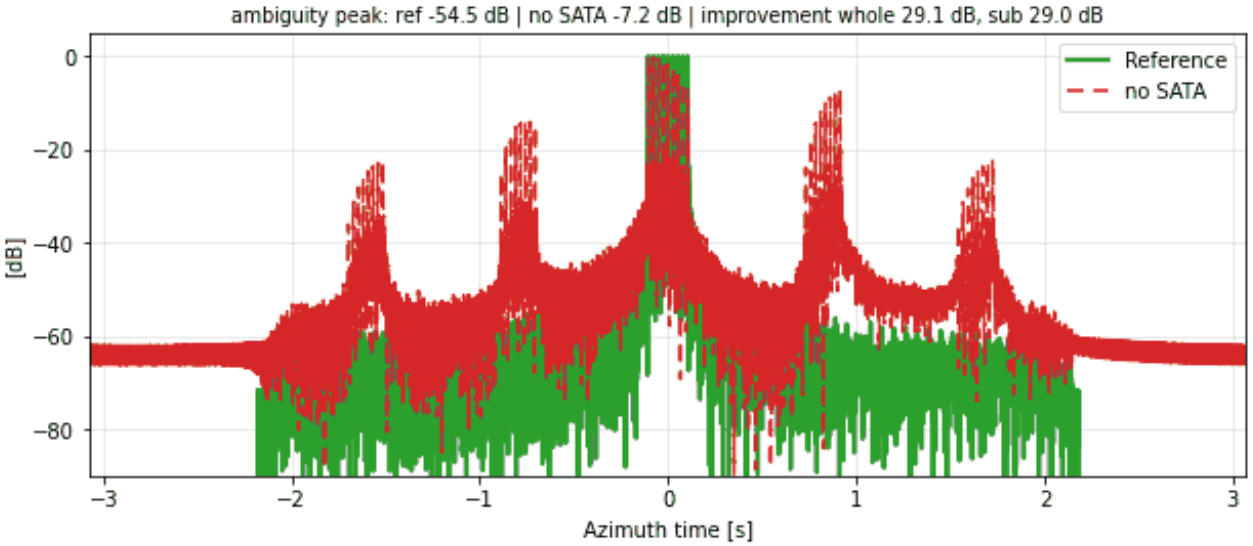



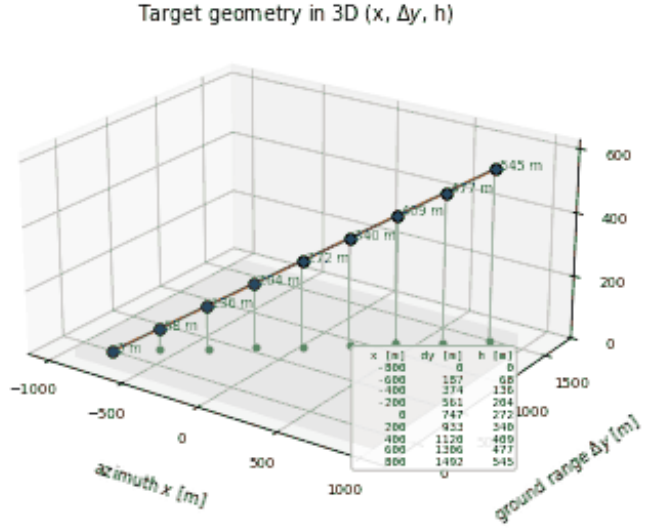
RA-SL-055 | SATA 1D | along-track ramp: N = 9, $\alpha = 1.5°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

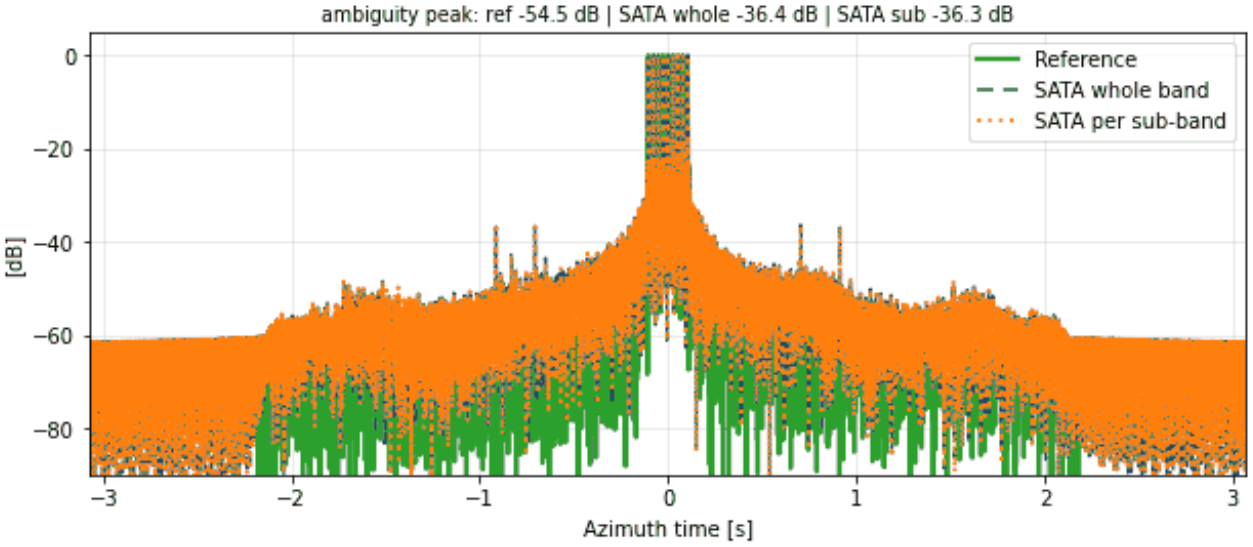





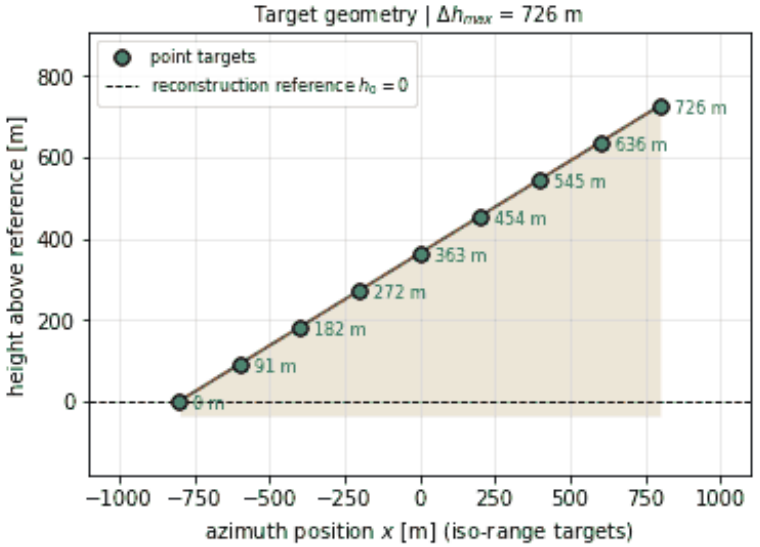



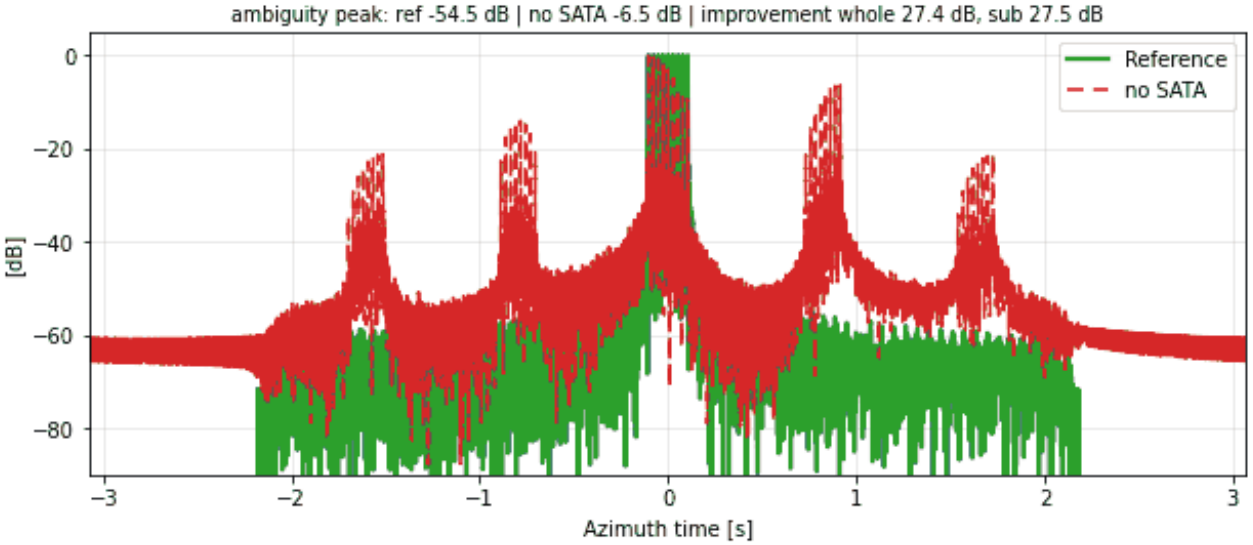



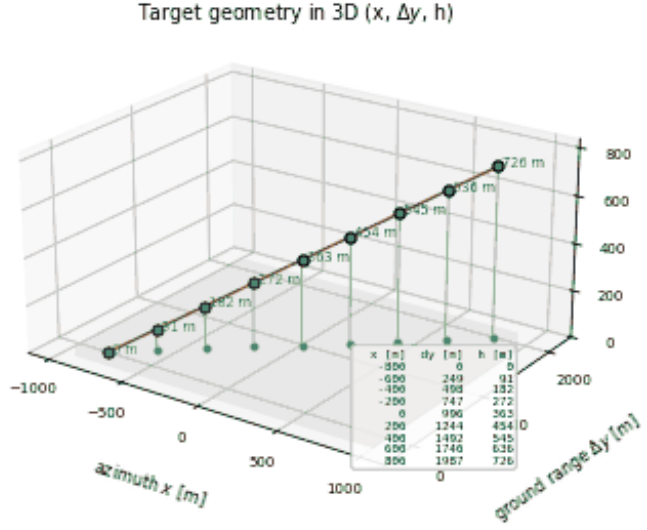
RA-SL-056 | SATA 1D | along-track ramp: N = 9, $\alpha = 2^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

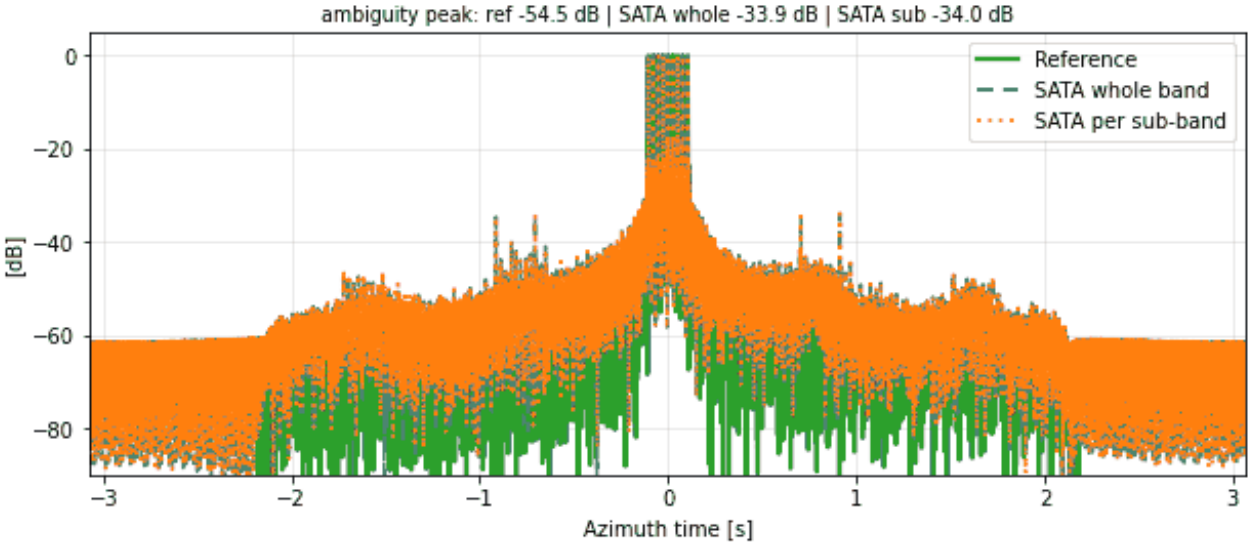






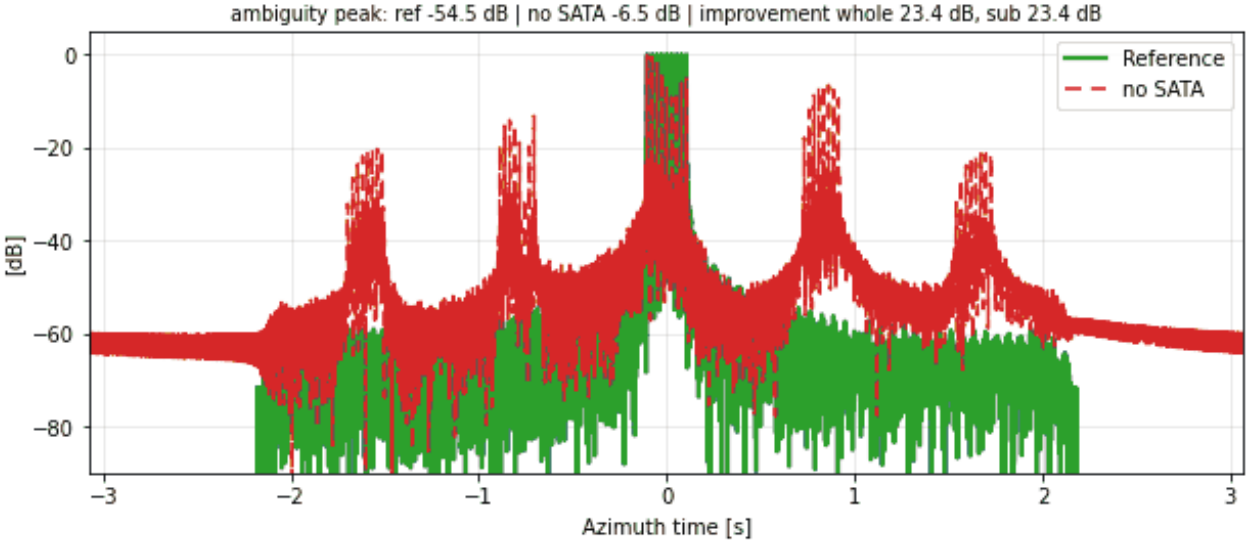



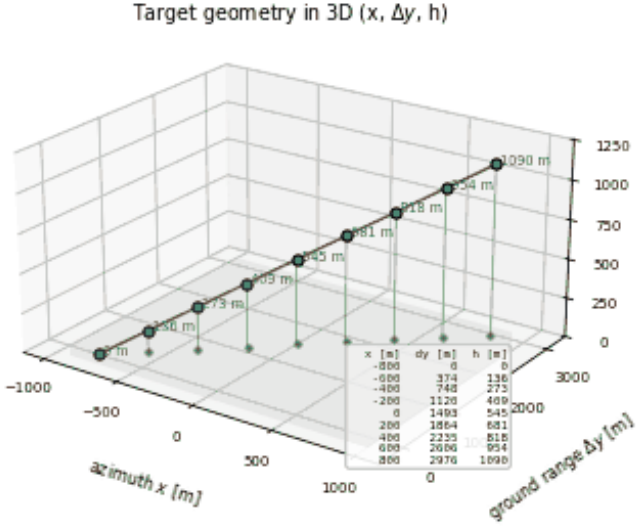



RA-SL-057 | SATA 1D | along-track ramp: N = 9, $\alpha = 3^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

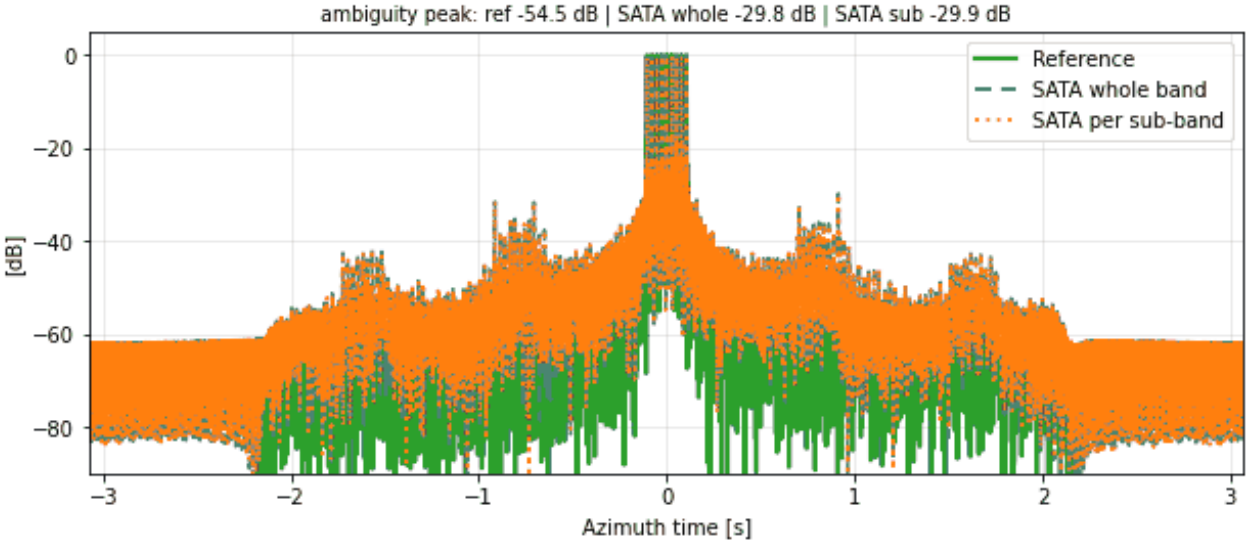


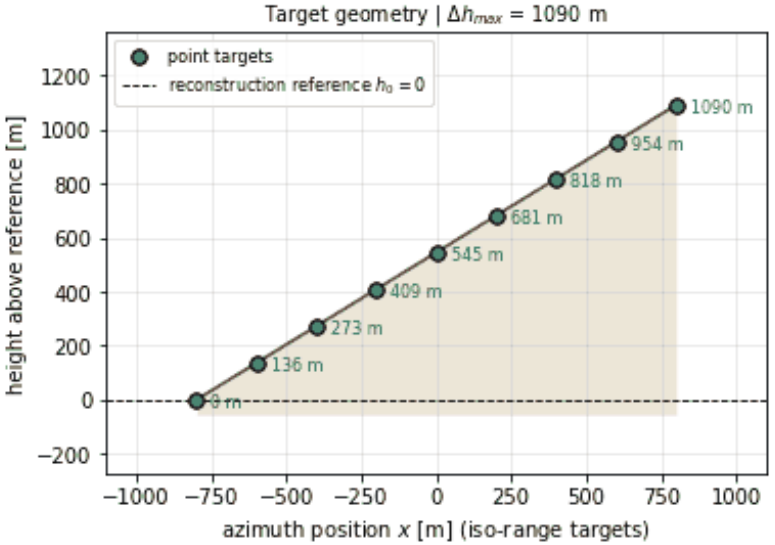



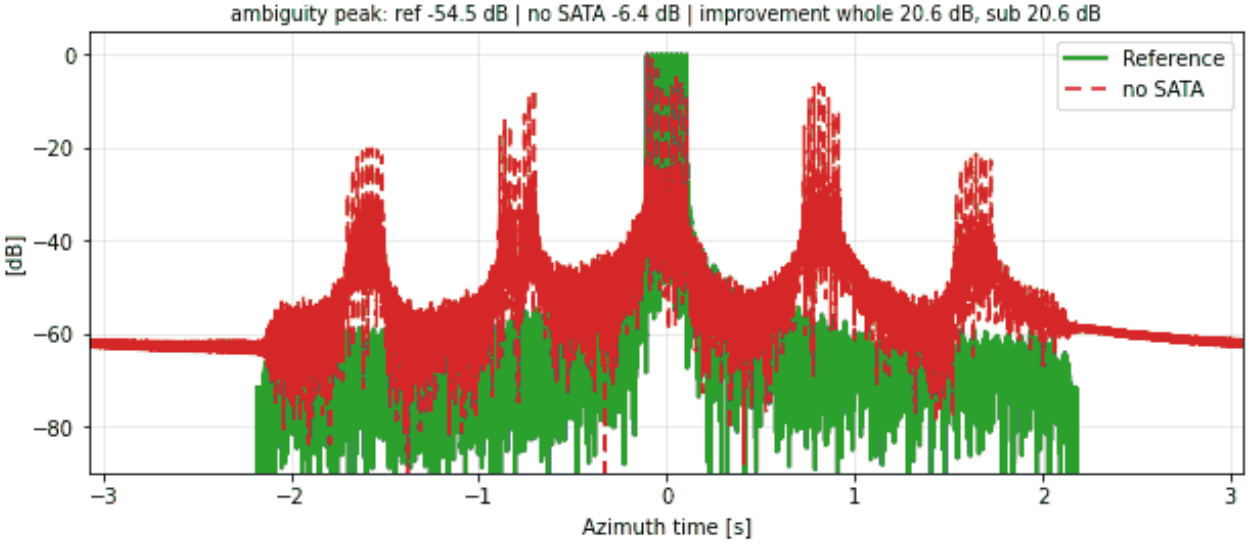



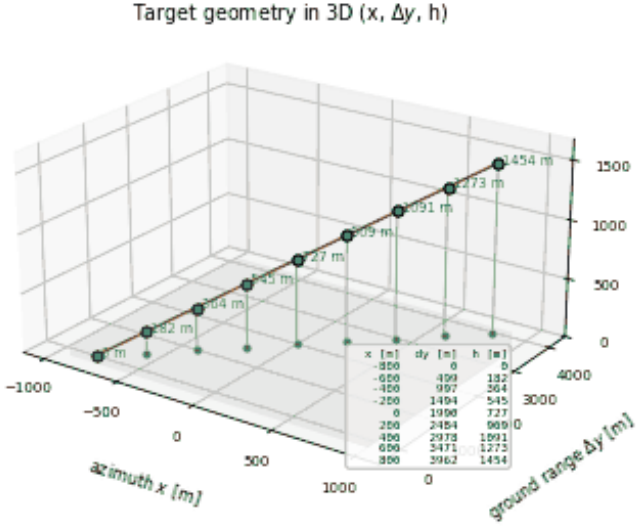



RA-SL-058 | SATA 1D | along-track ramp: N = 9, $\alpha = 4°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

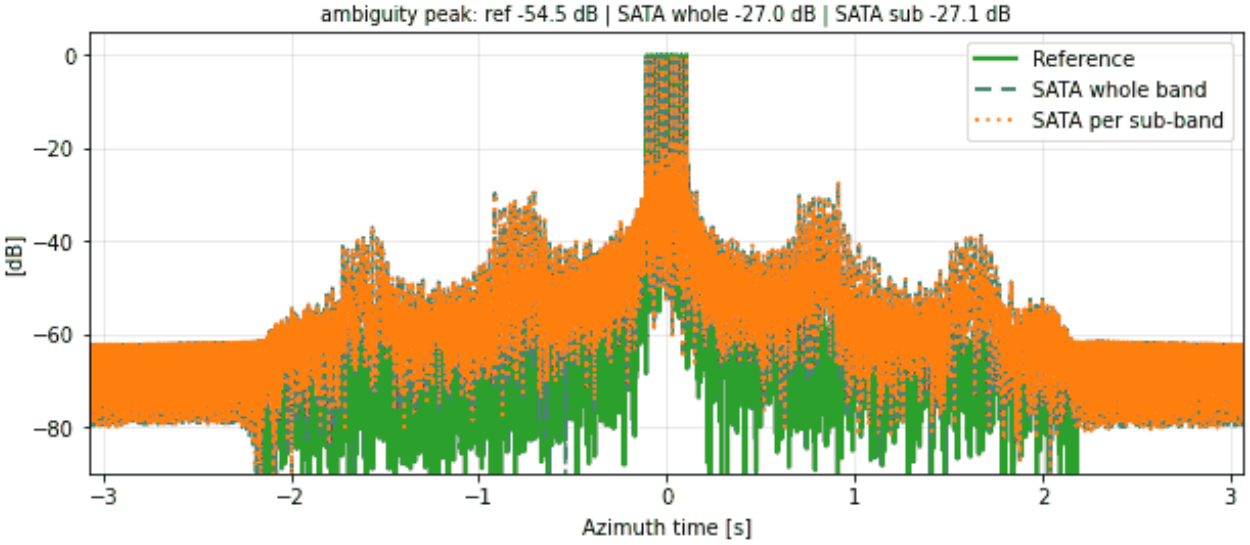


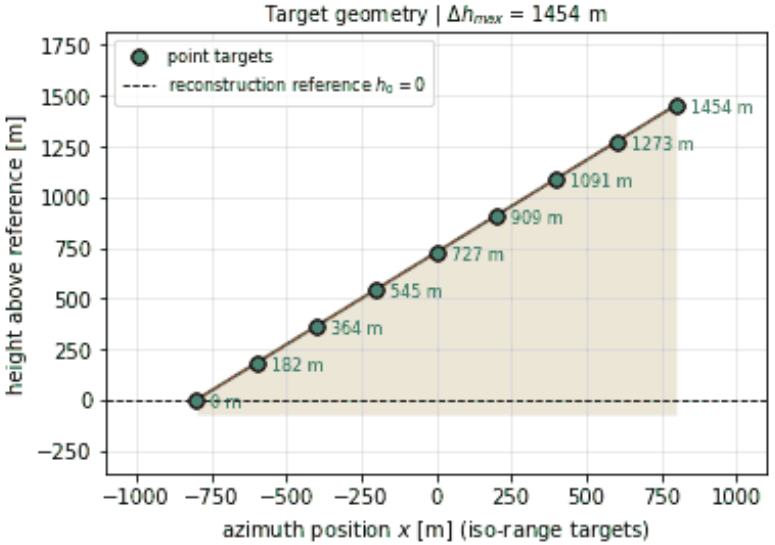



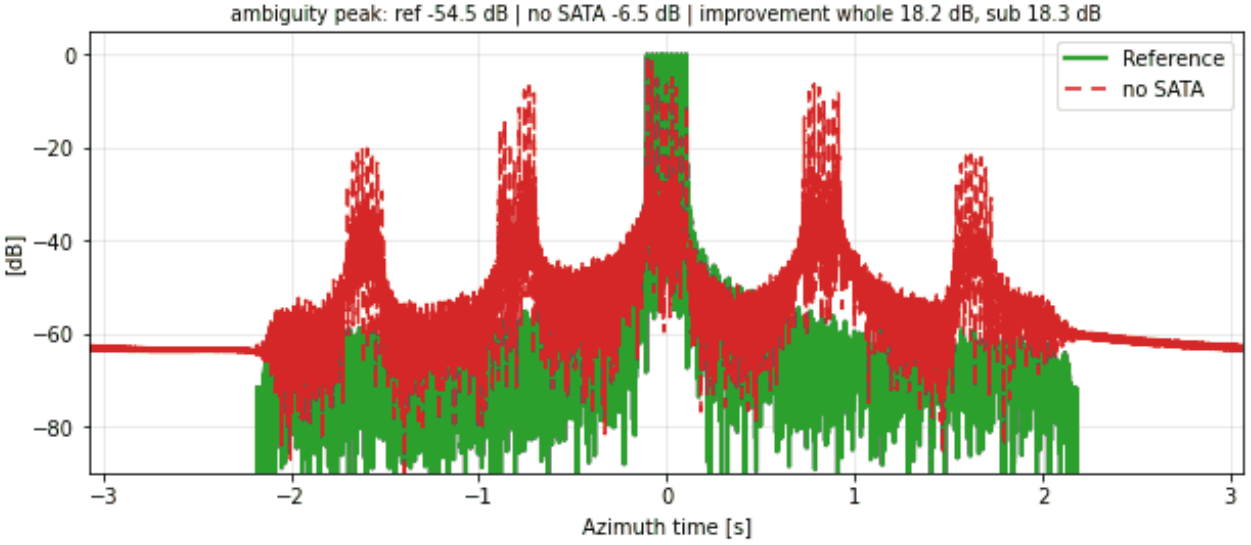



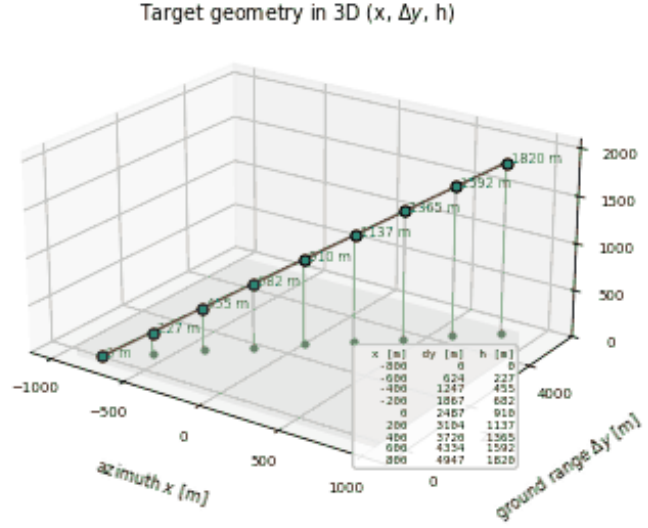



RA-SL-059 | SATA 1D | along-track ramp: N = 9, $\alpha = 5^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

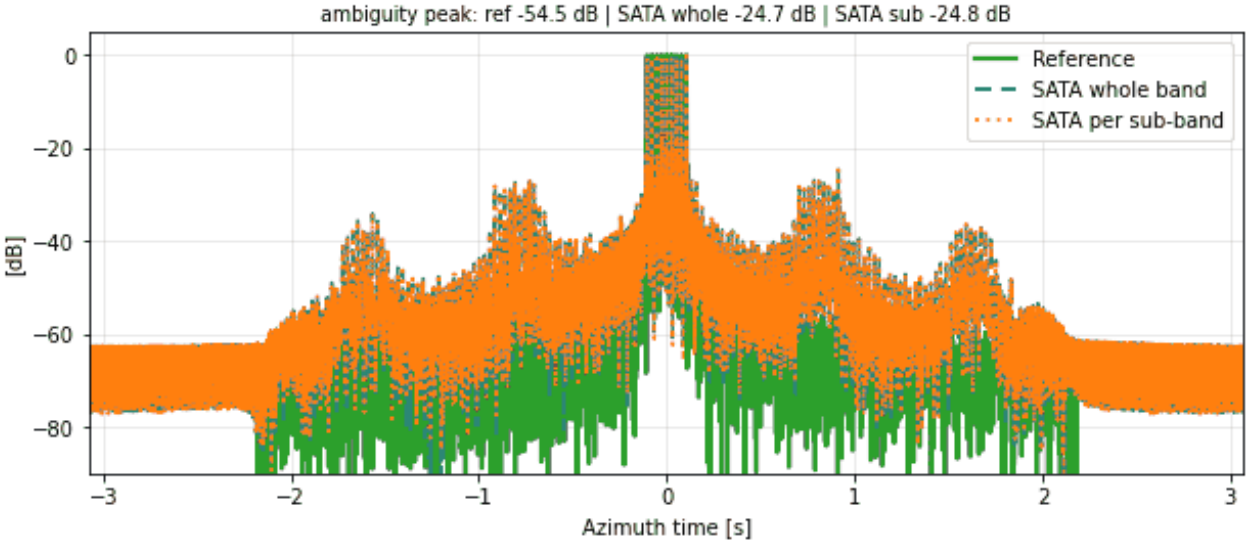

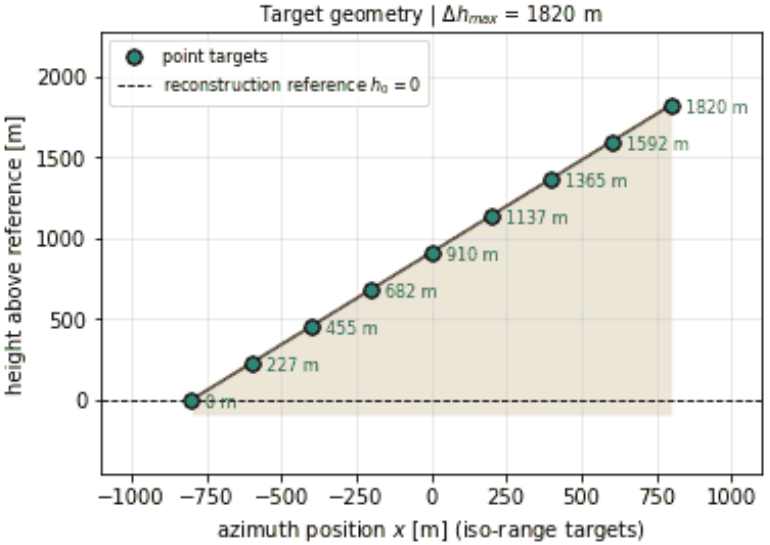



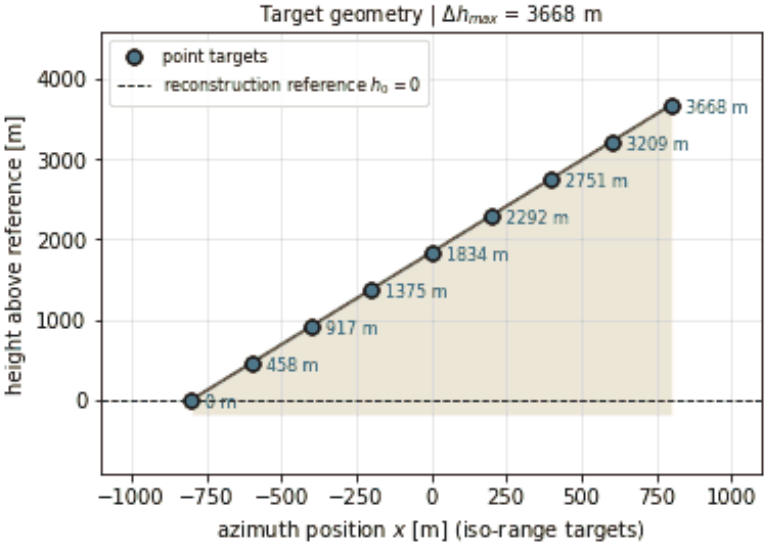



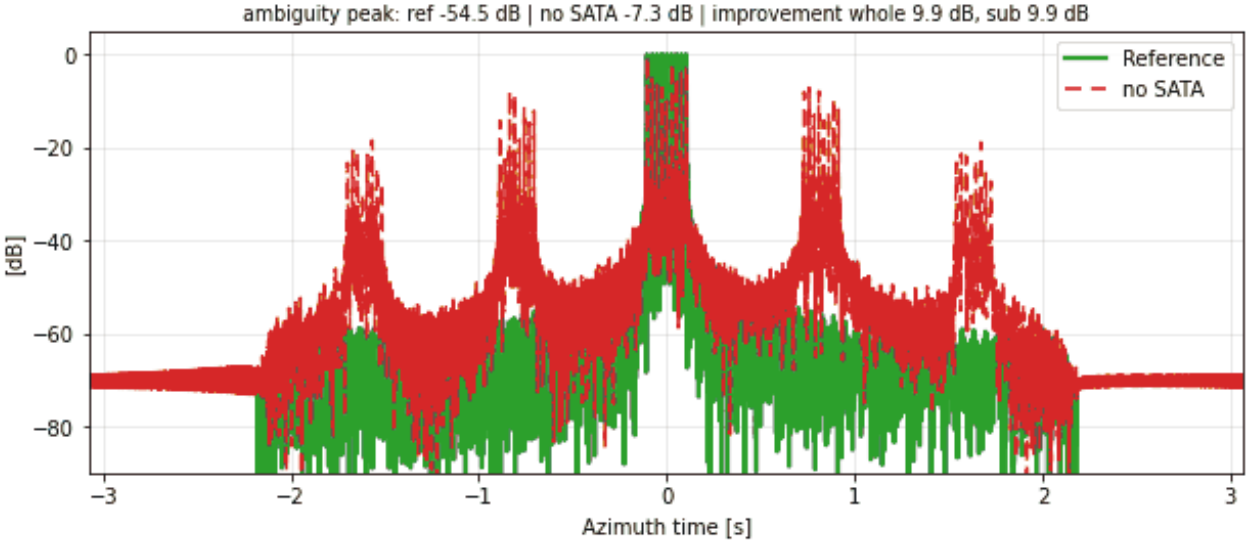



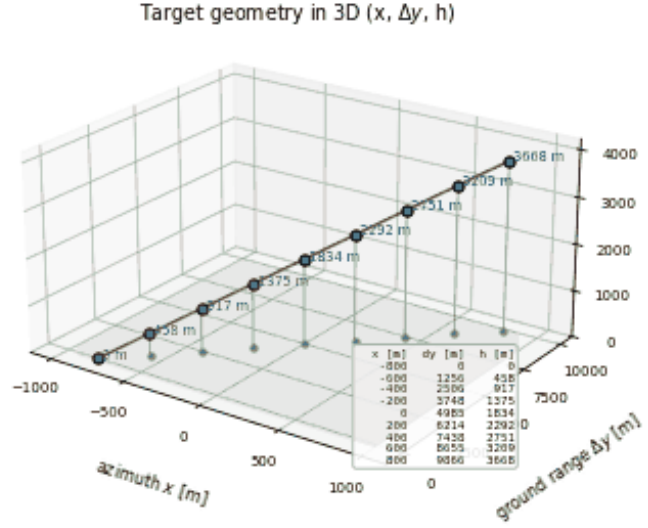
RA-SL-060 | SATA 1D | along-track ramp: N = 9, $\alpha = 10°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

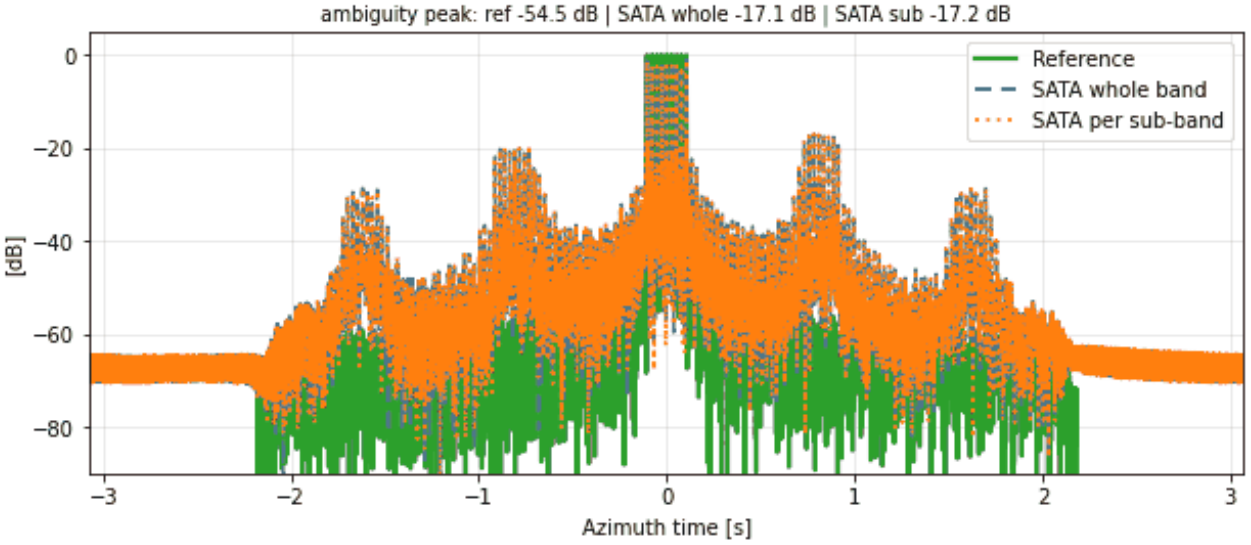





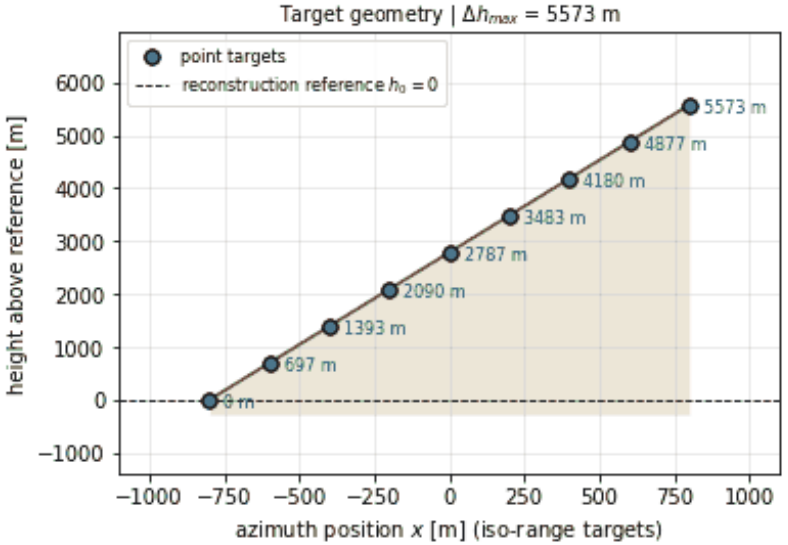



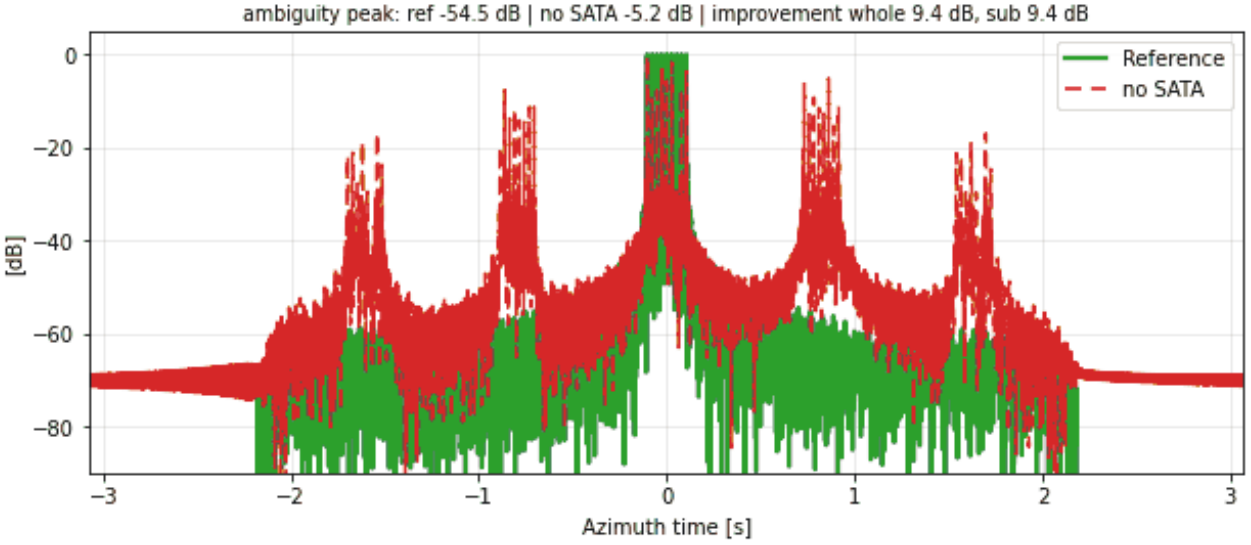



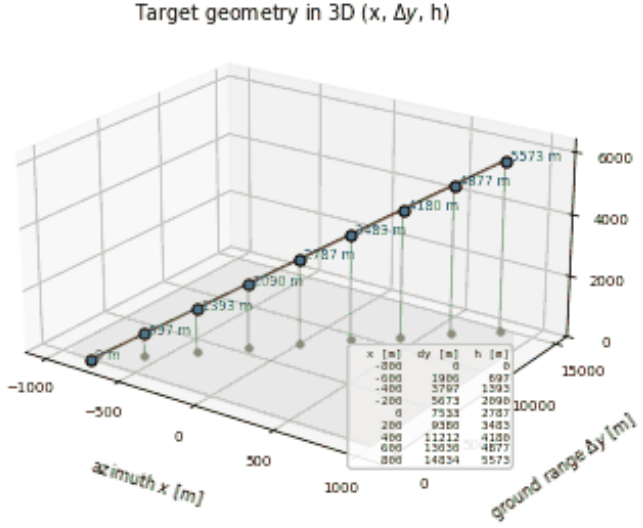
RA-SL-061 | SATA 1D | along-track ramp: N = 9, $\alpha = 15^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

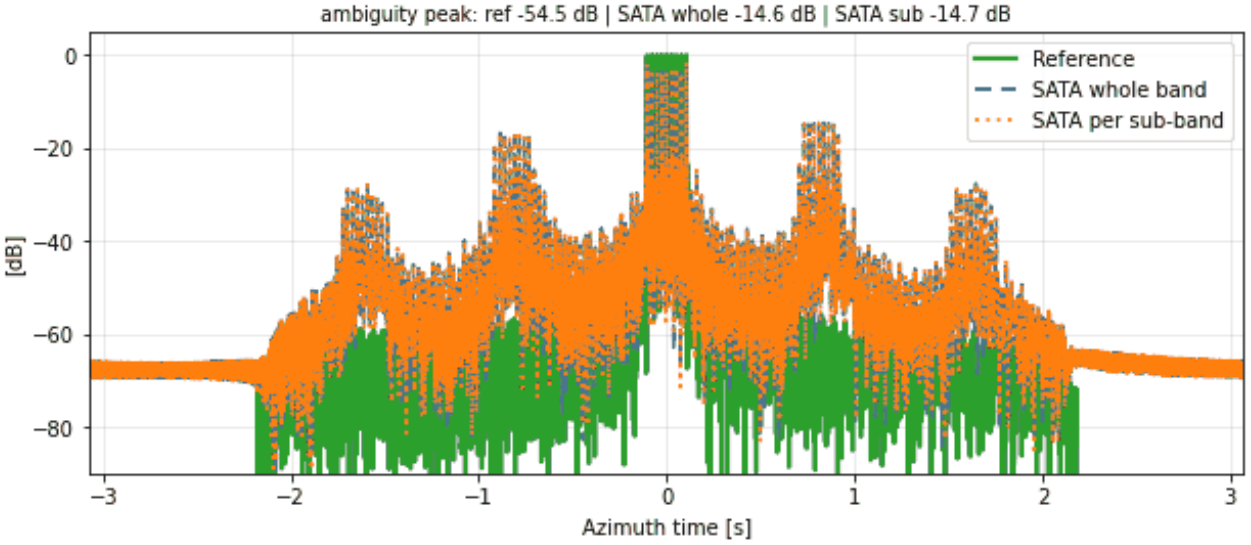





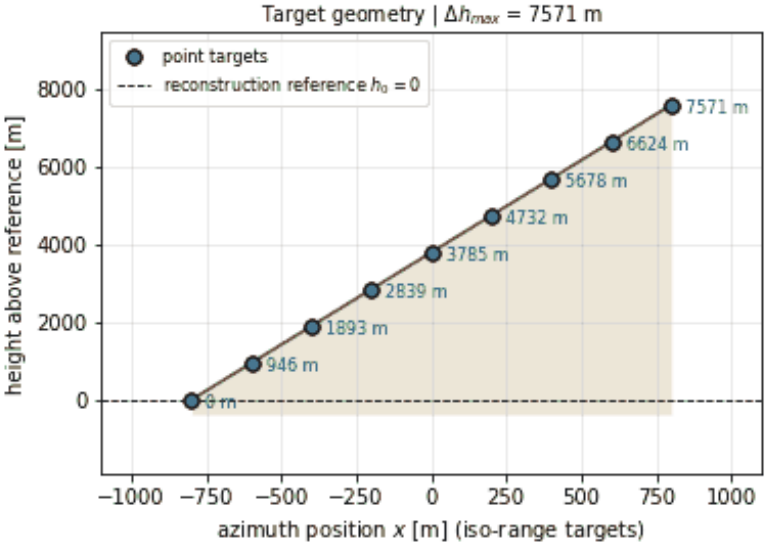



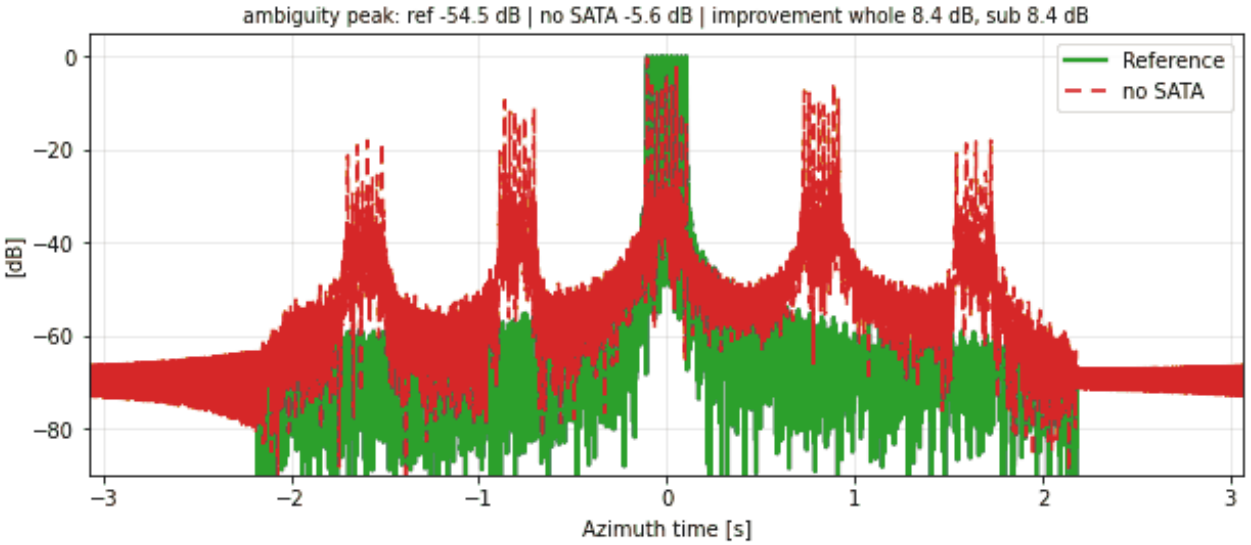



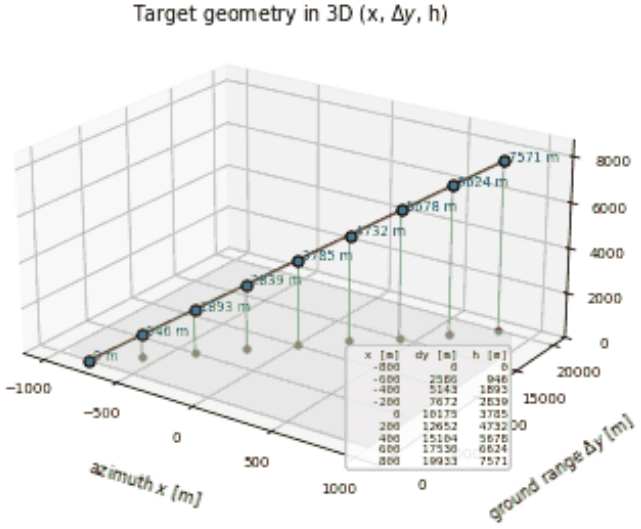
RA-SL-062 | SATA 1D | along-track ramp: N = 9, $\alpha = 20°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

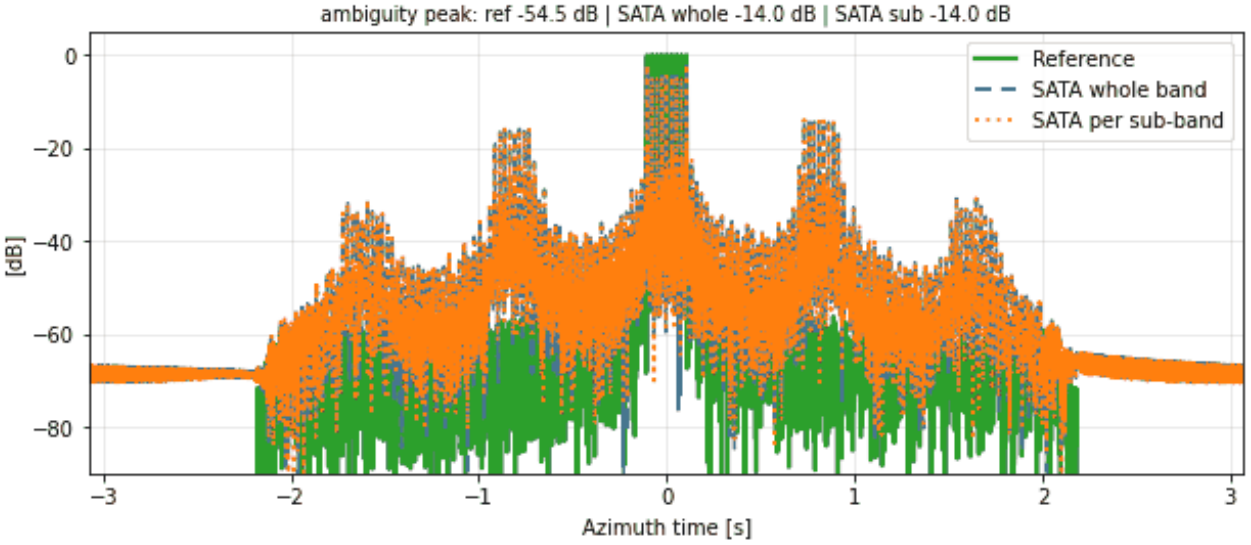






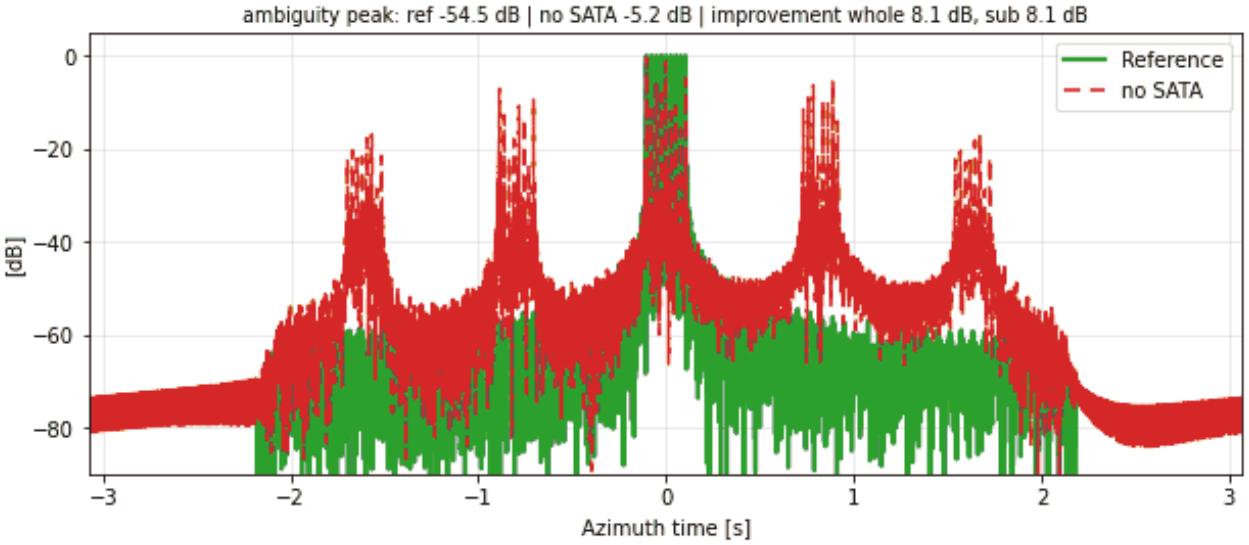



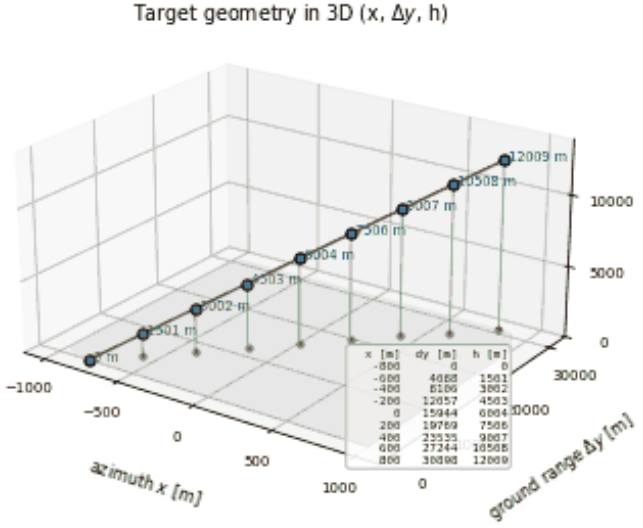



RA-SL-063 | SATA 1D | along-track ramp: N = 9, $\alpha = 30°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

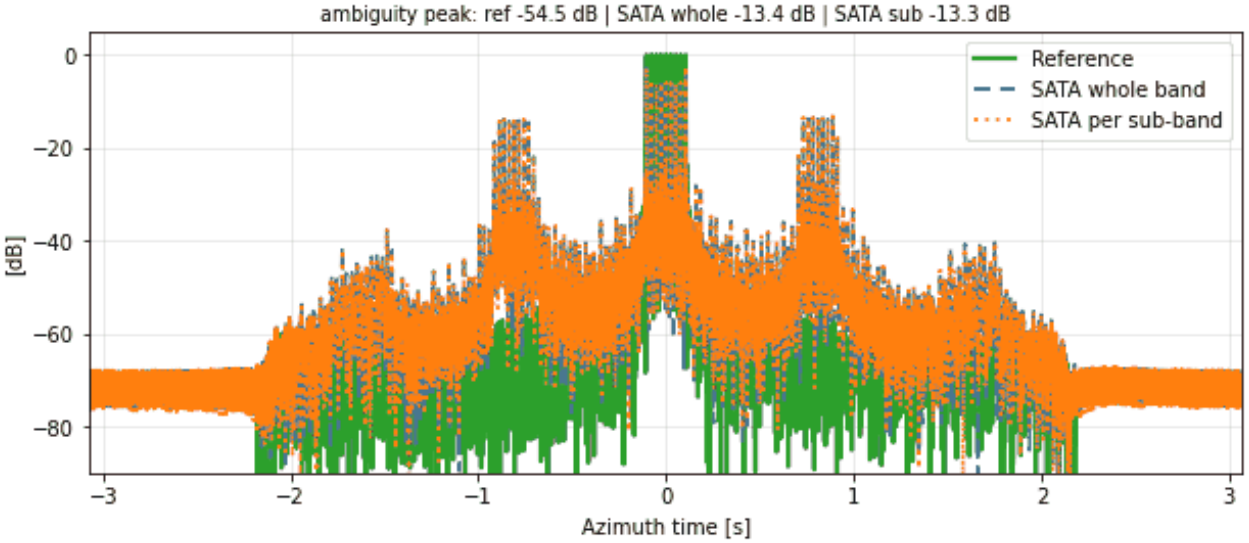

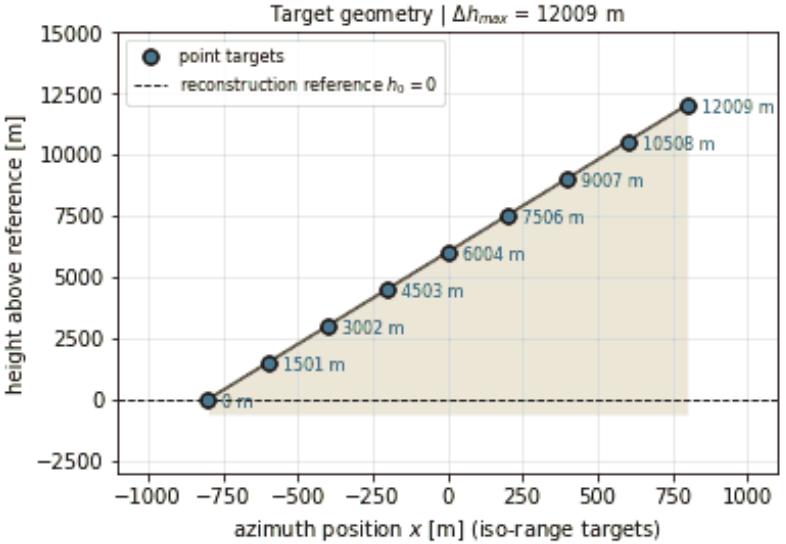



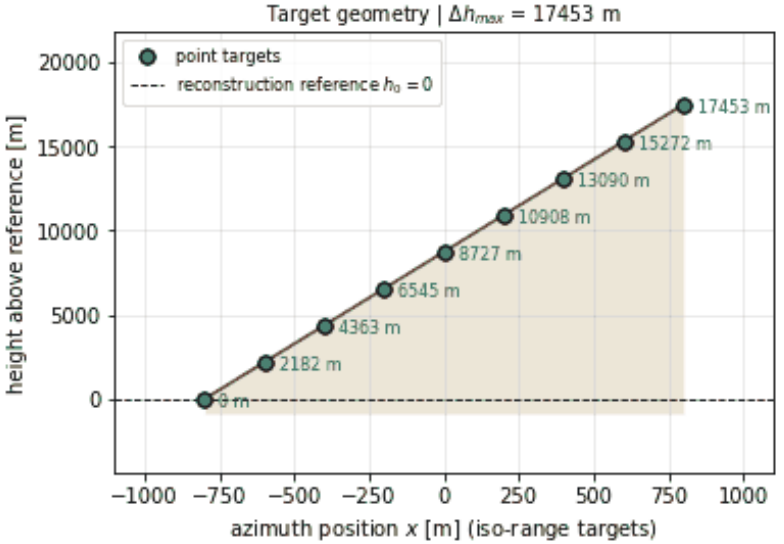



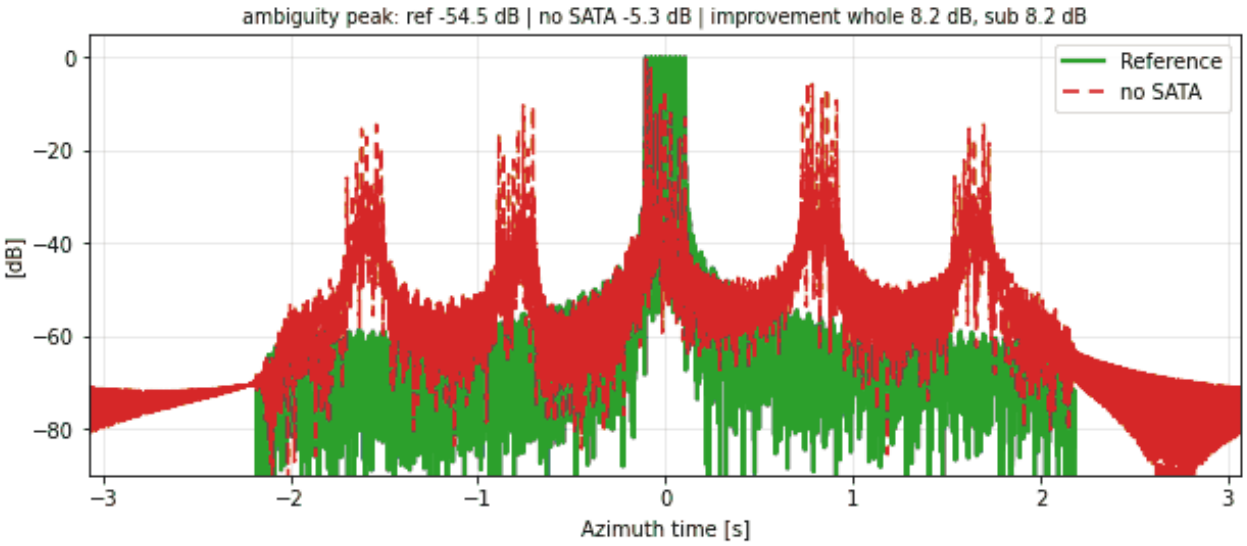



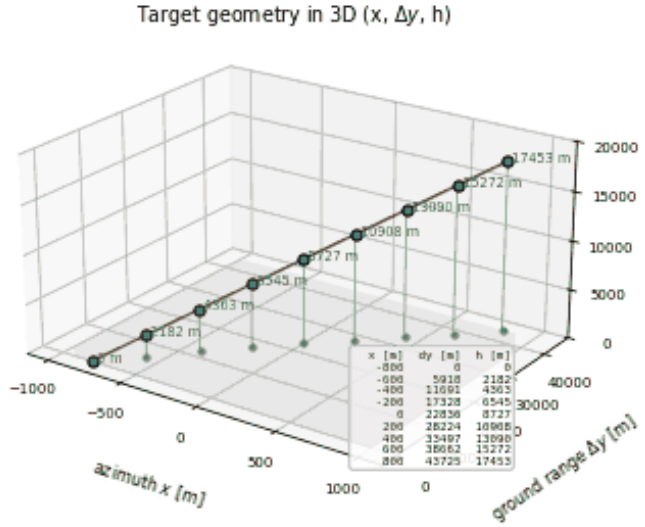
RA-SL-064 | SATA 1D | along-track ramp: N = 9, $\alpha = 40^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

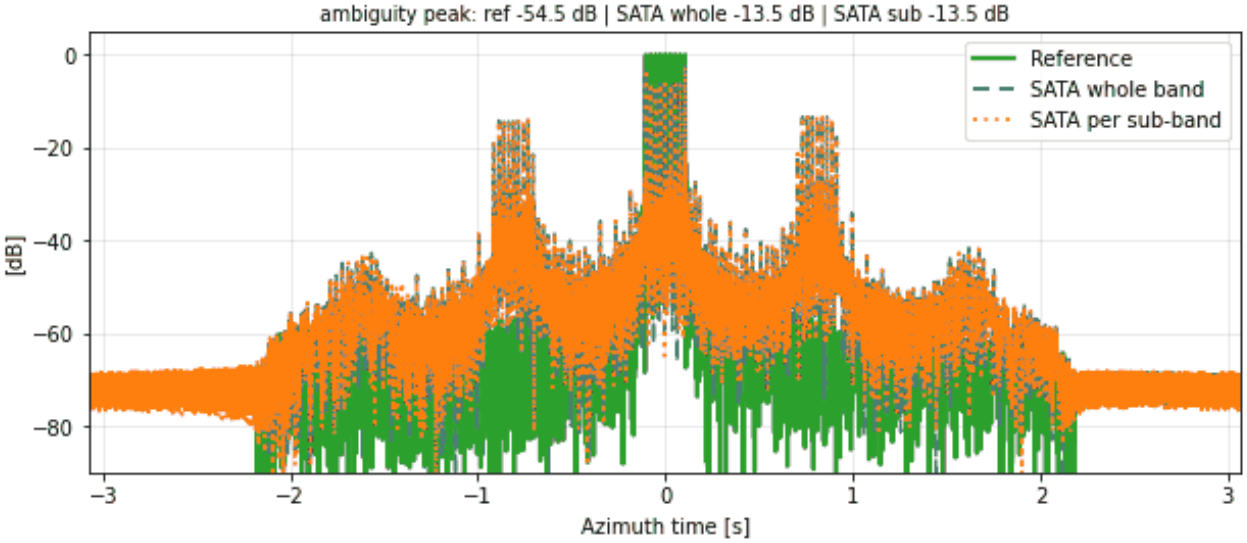





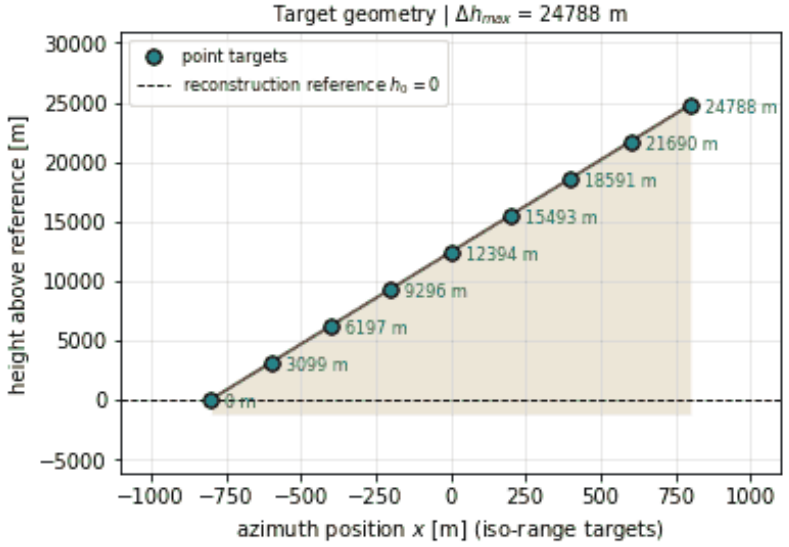



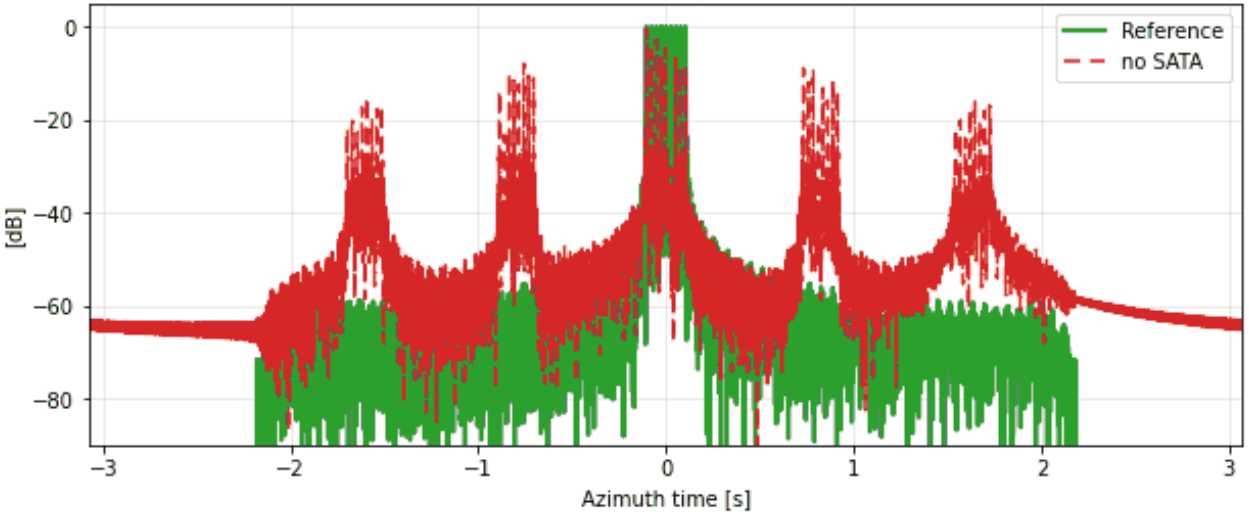



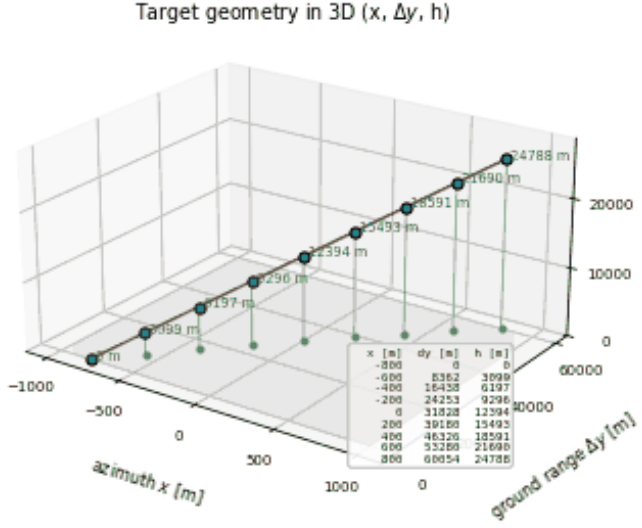
RA-SL-065 | SATA 1D | along-track ramp: N = 9, $\alpha = 50^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

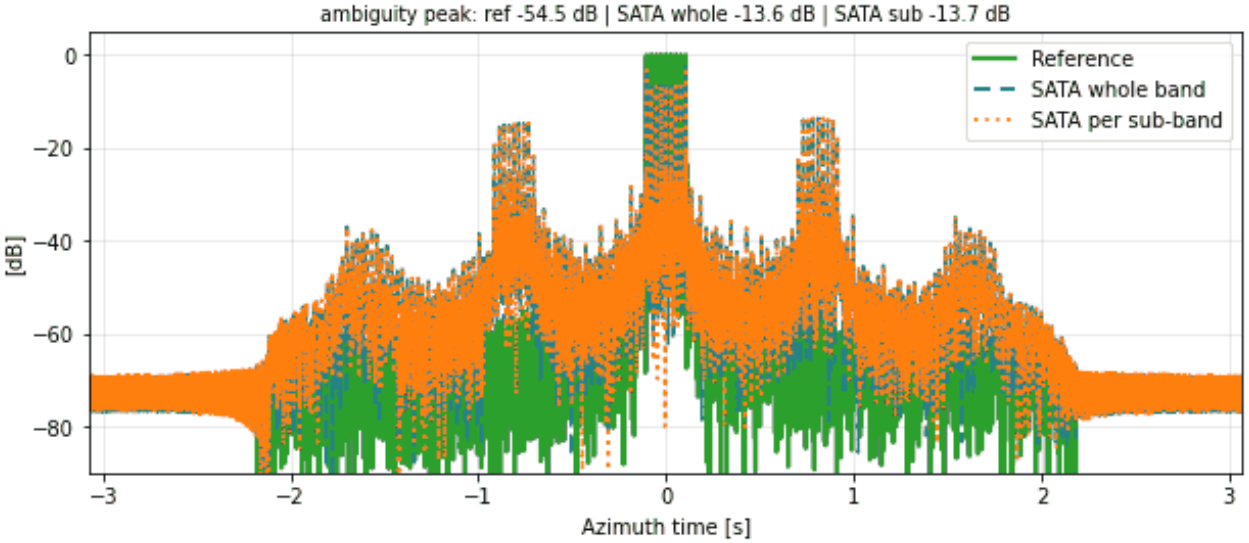






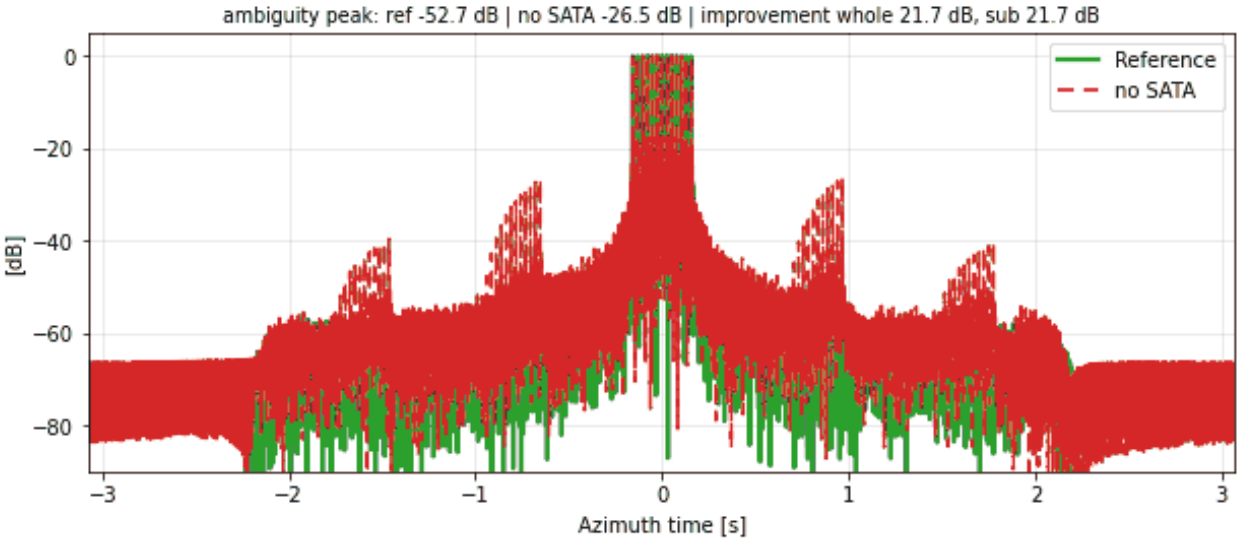



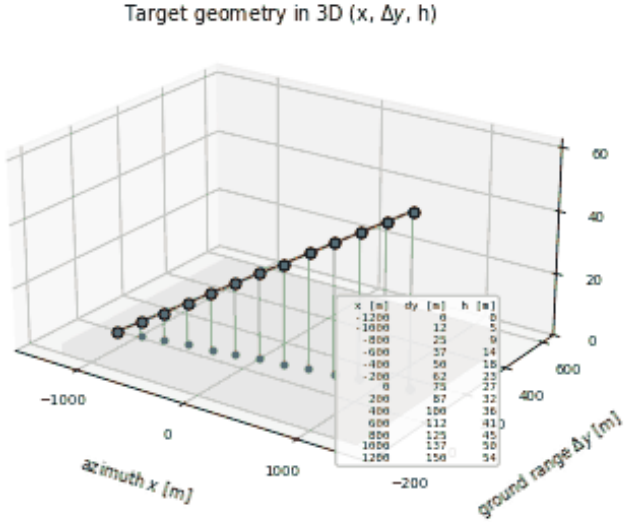



RA-SL-066 | SATA 1D | along-track ramp: N = 13, $\alpha = 0.1^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

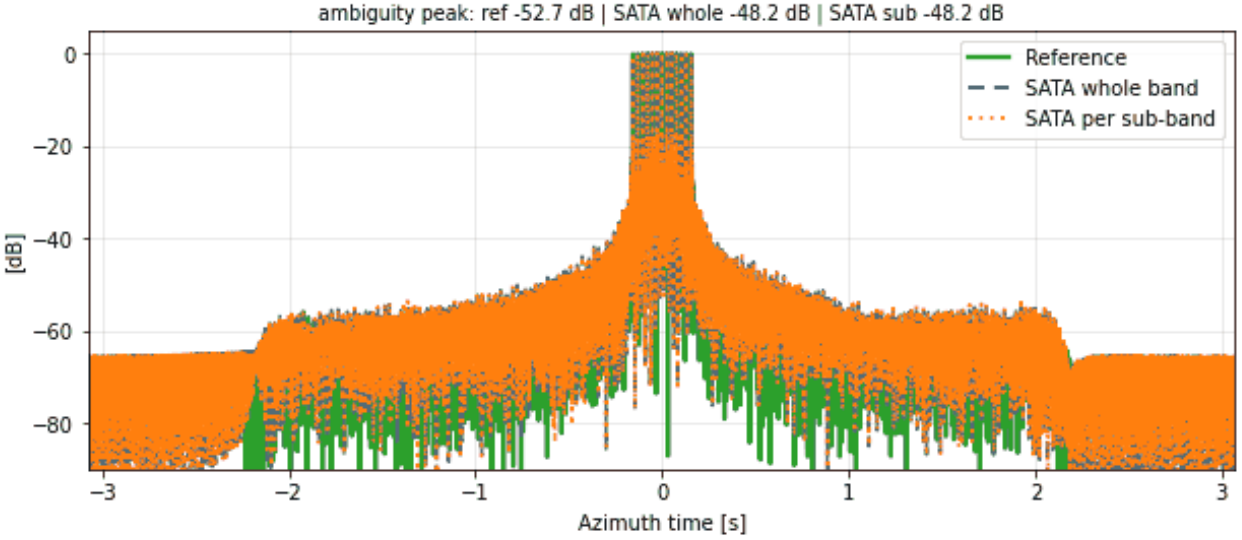

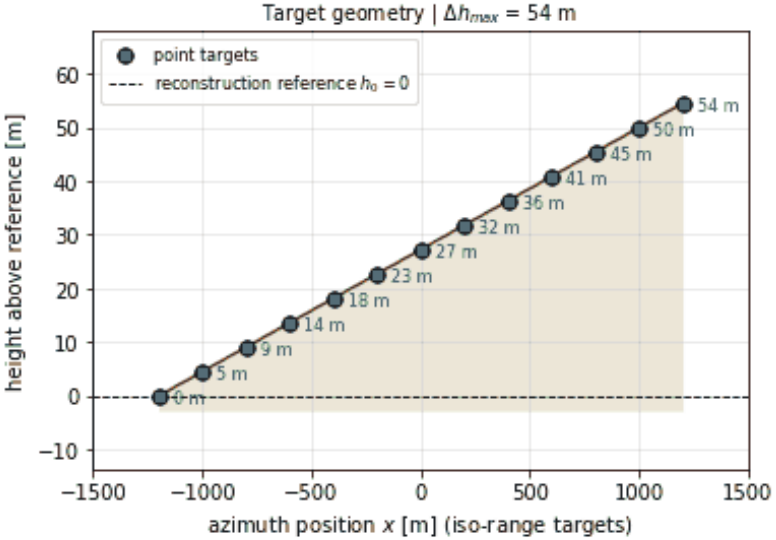



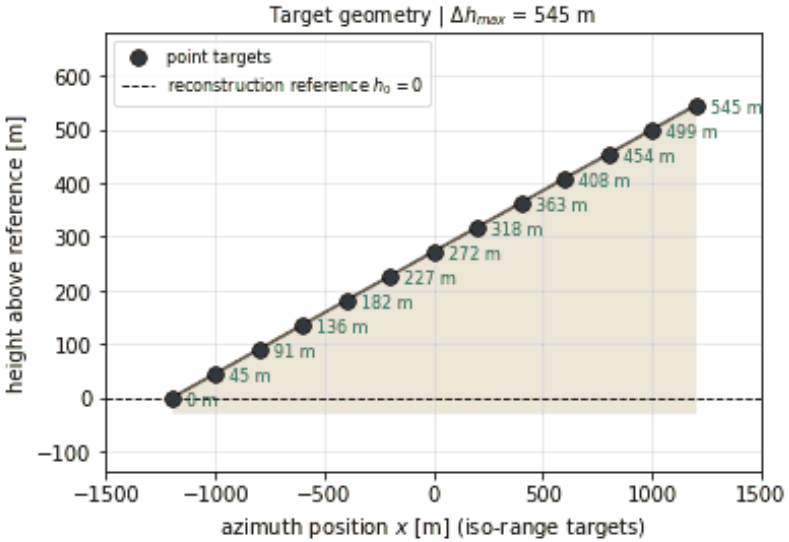



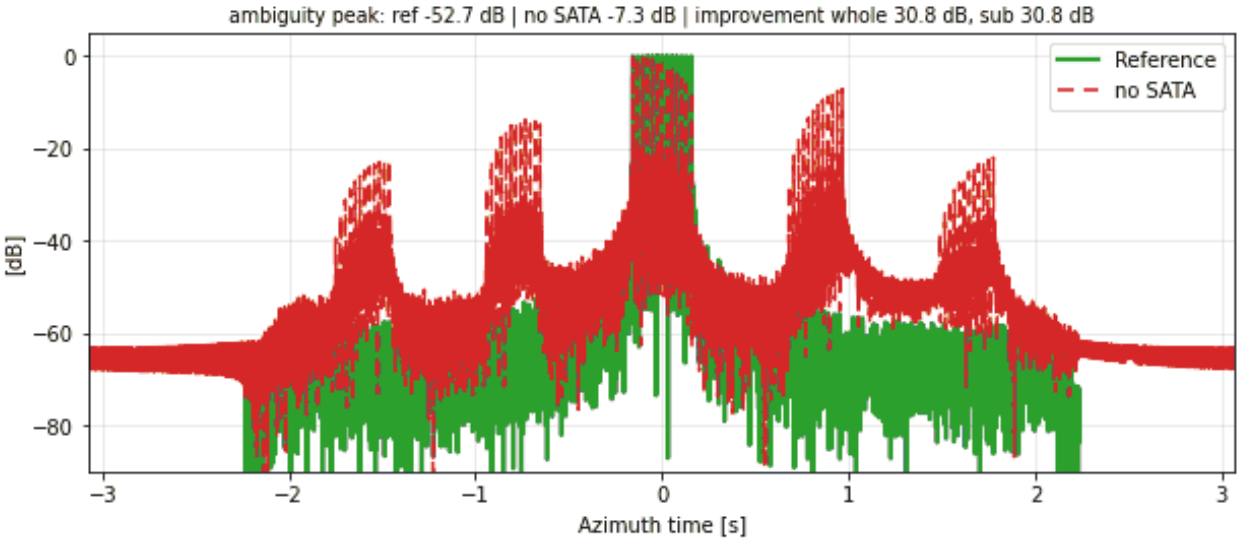



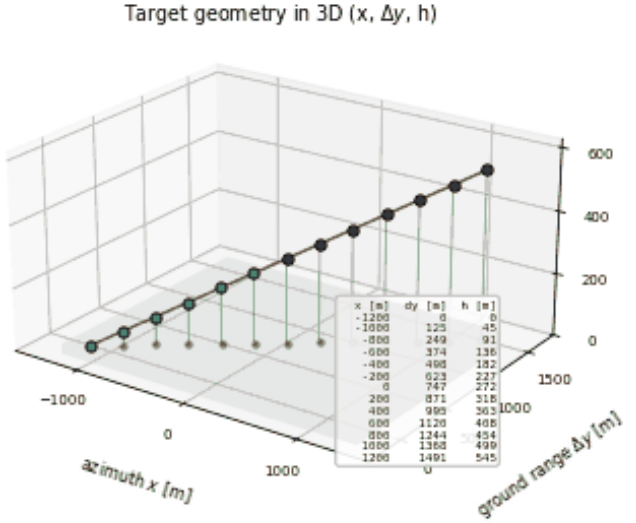
RA-SL-067 | SATA 1D | along-track ramp: N = 13, $\alpha = 1^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

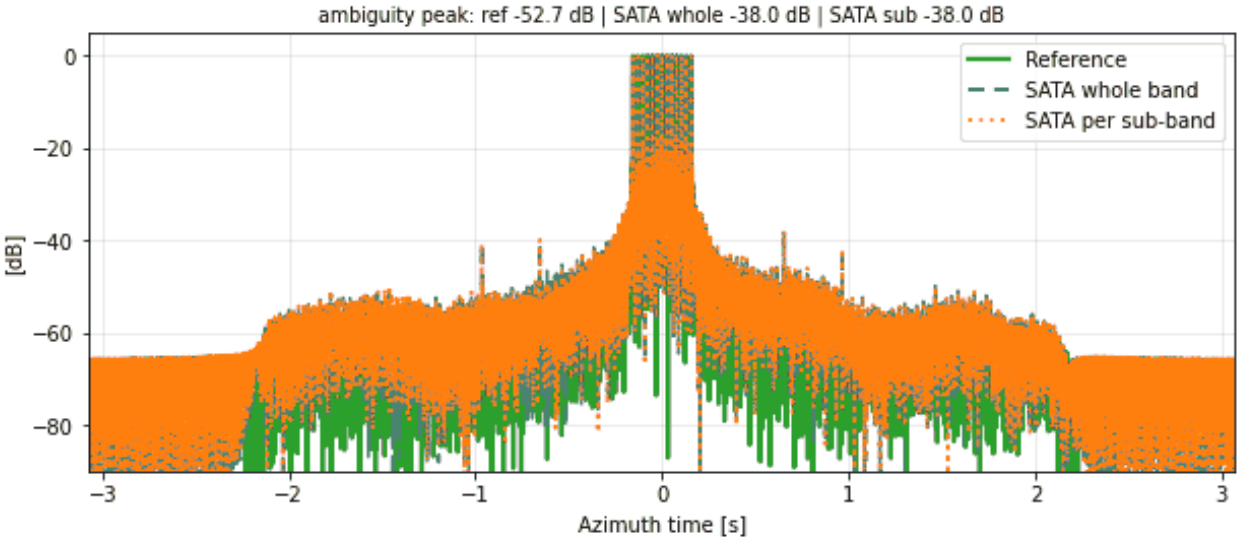






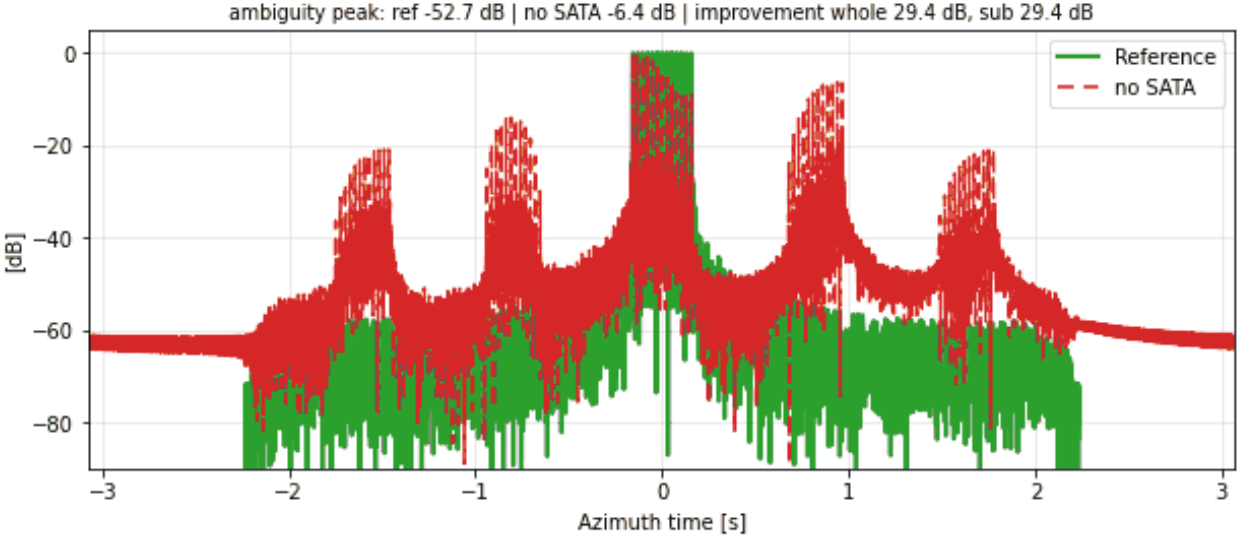



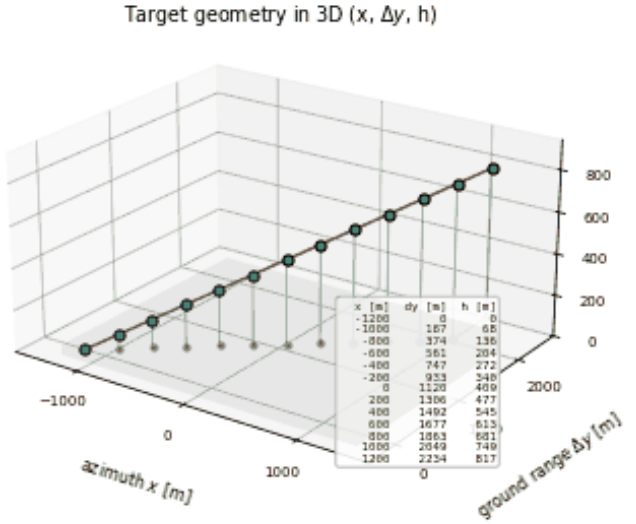



RA-SL-068 | SATA 1D | along-track ramp: N = 13, $\alpha = 1.5°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

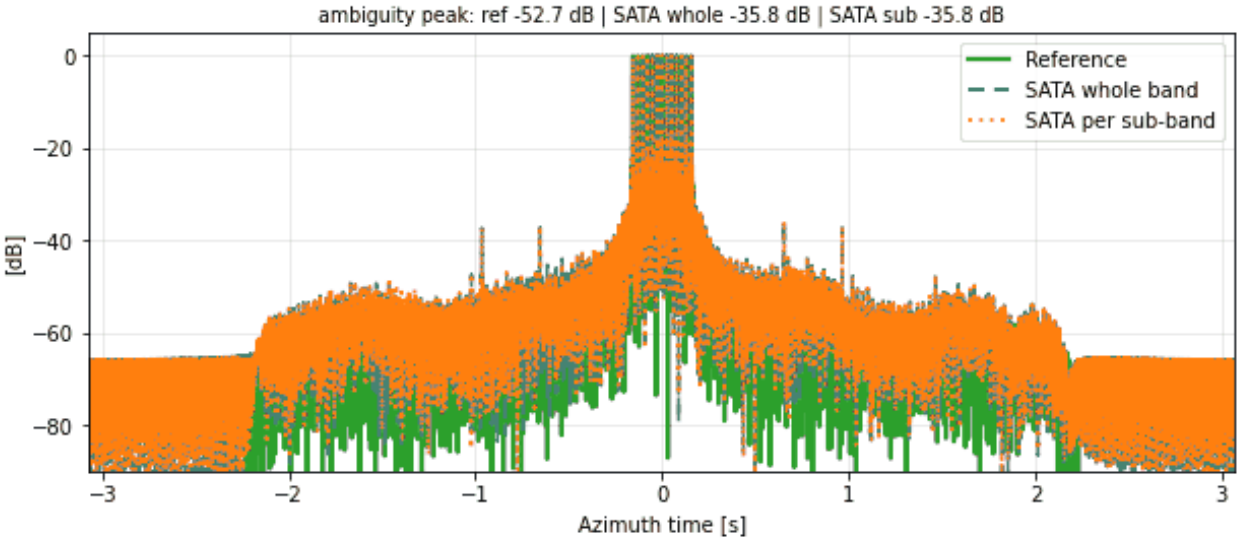

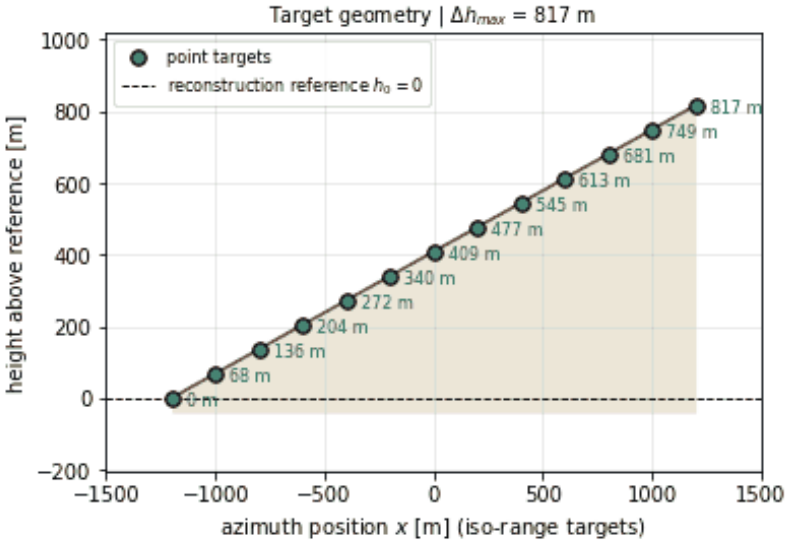



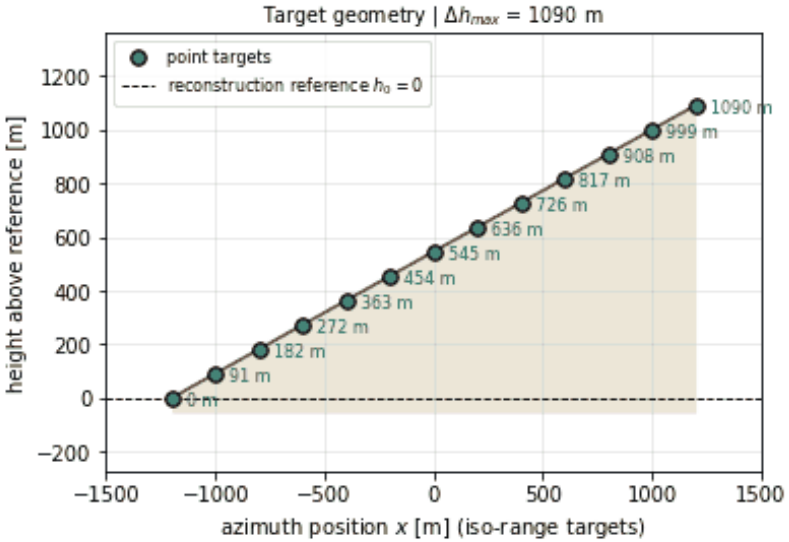



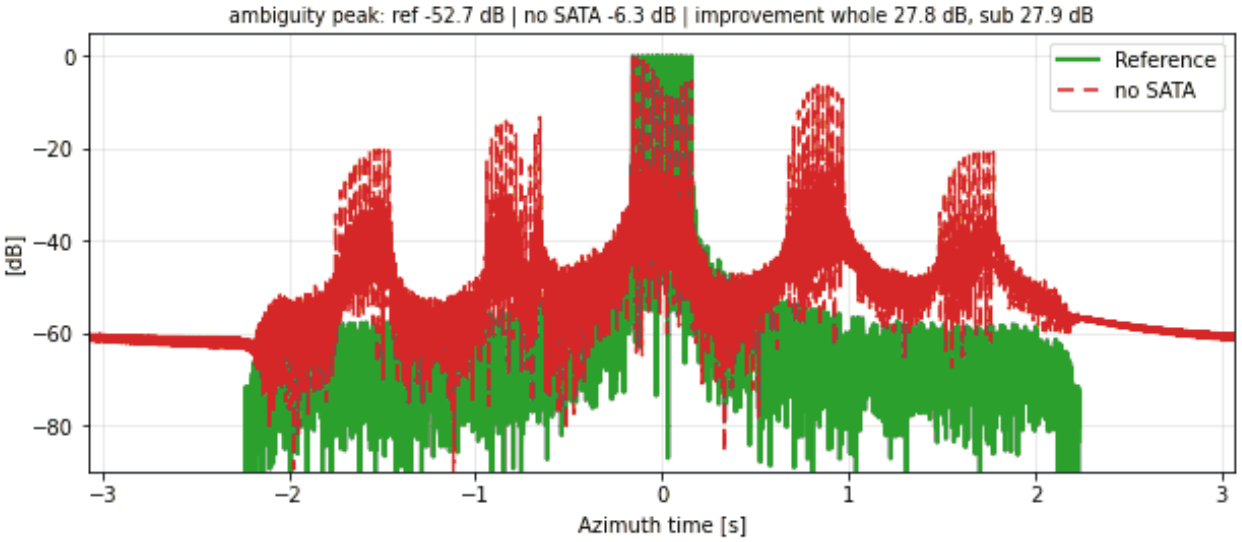



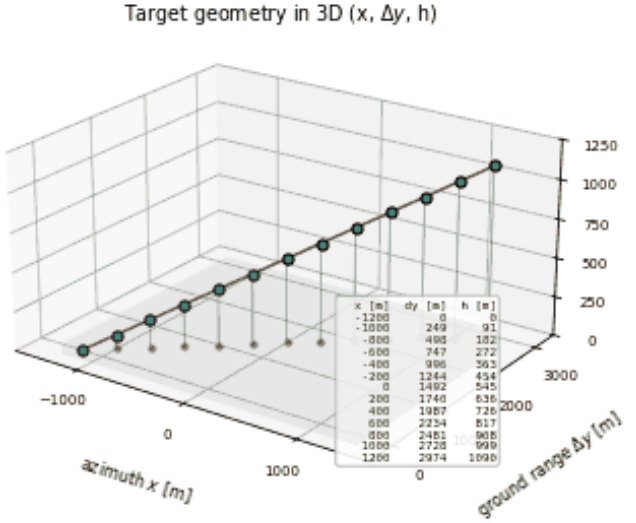
RA-SL-069 | SATA 1D | along-track ramp: N = 13, $\alpha = 2^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

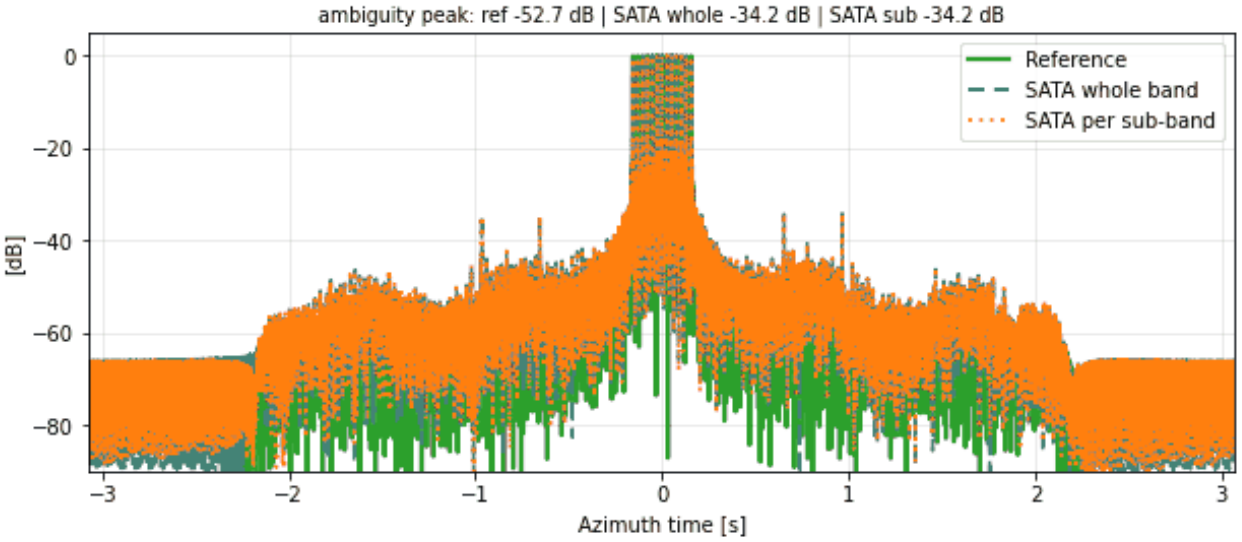





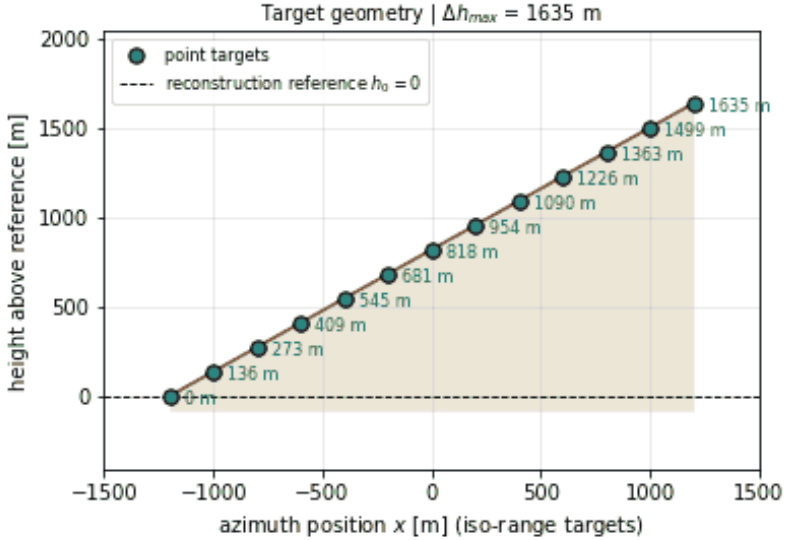



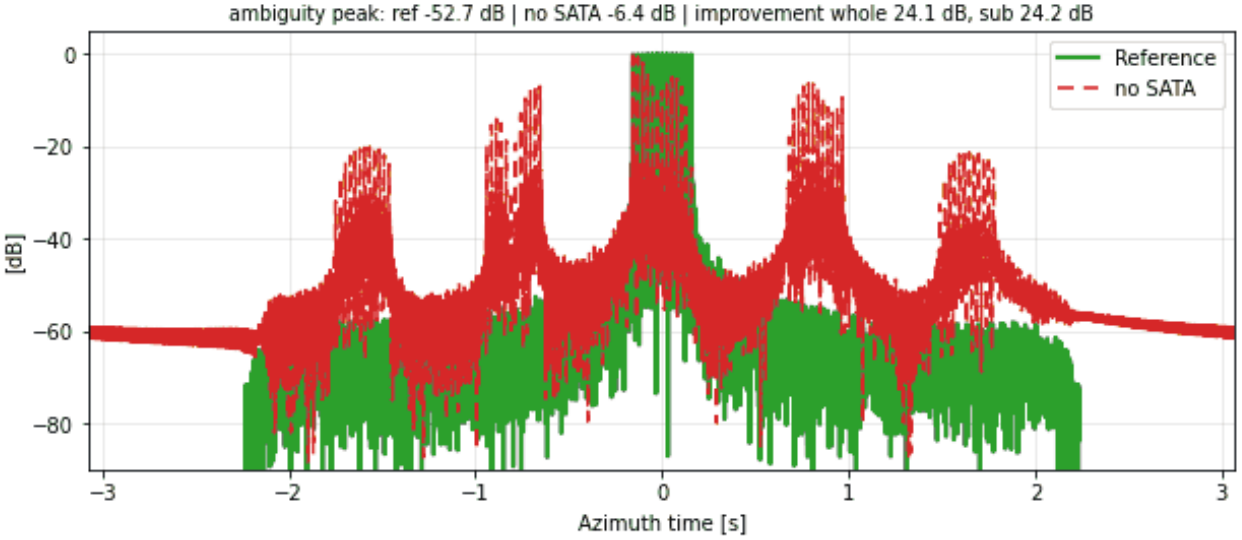



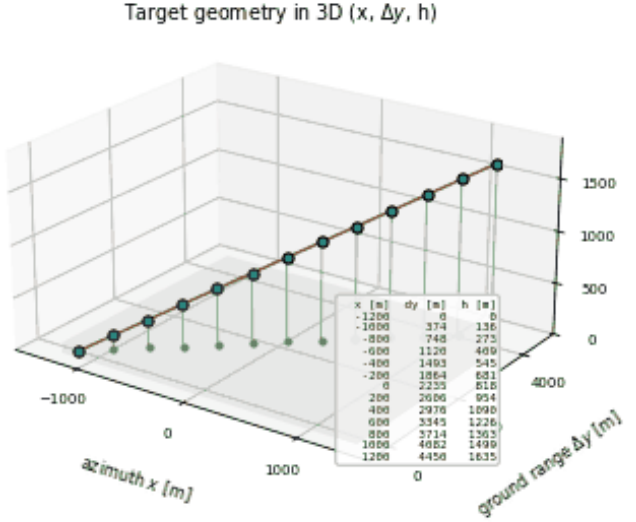
RA-SL-070 | SATA 1D | along-track ramp: N = 13, $\alpha = 3^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

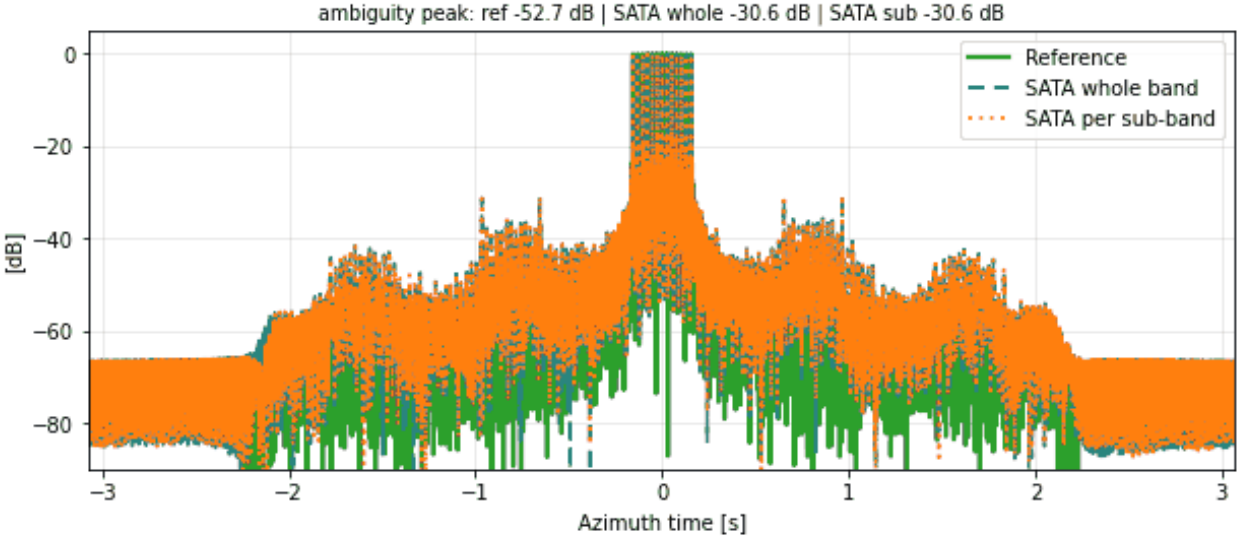





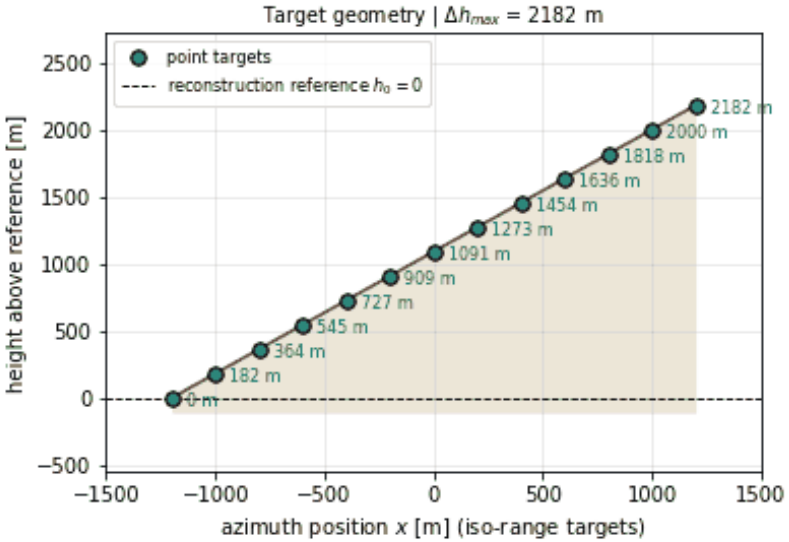



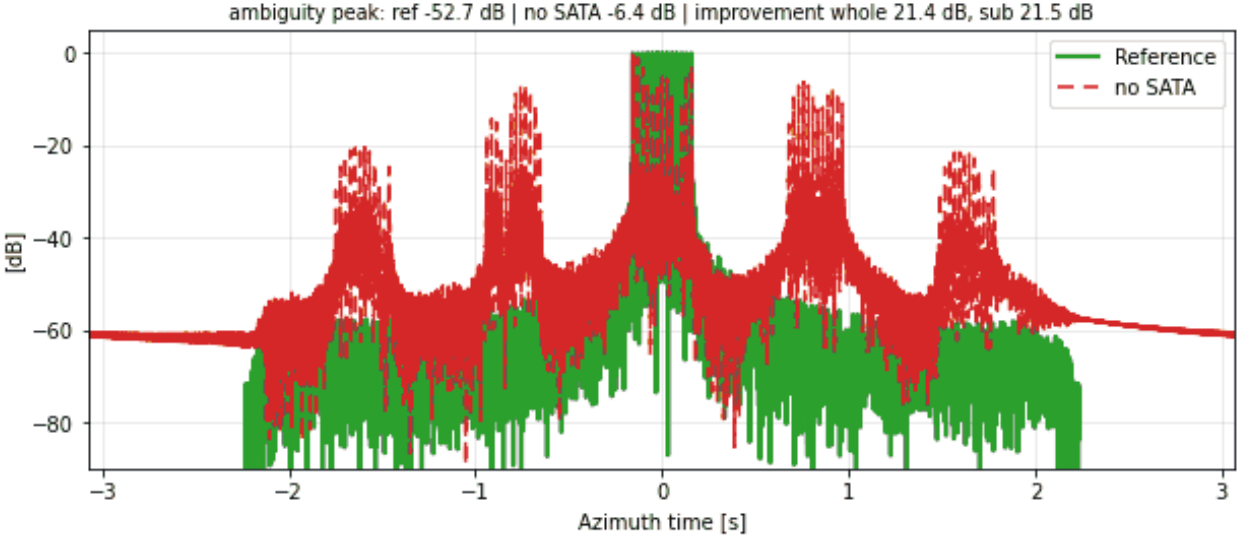



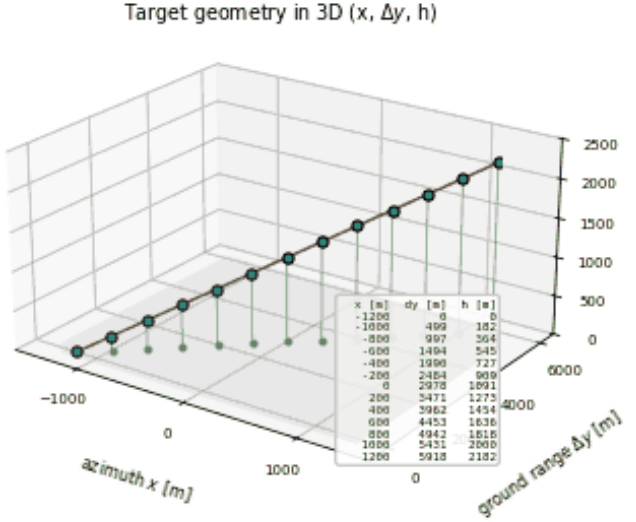
RA-SL-071 | SATA 1D | along-track ramp: N = 13, $\alpha = 4^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

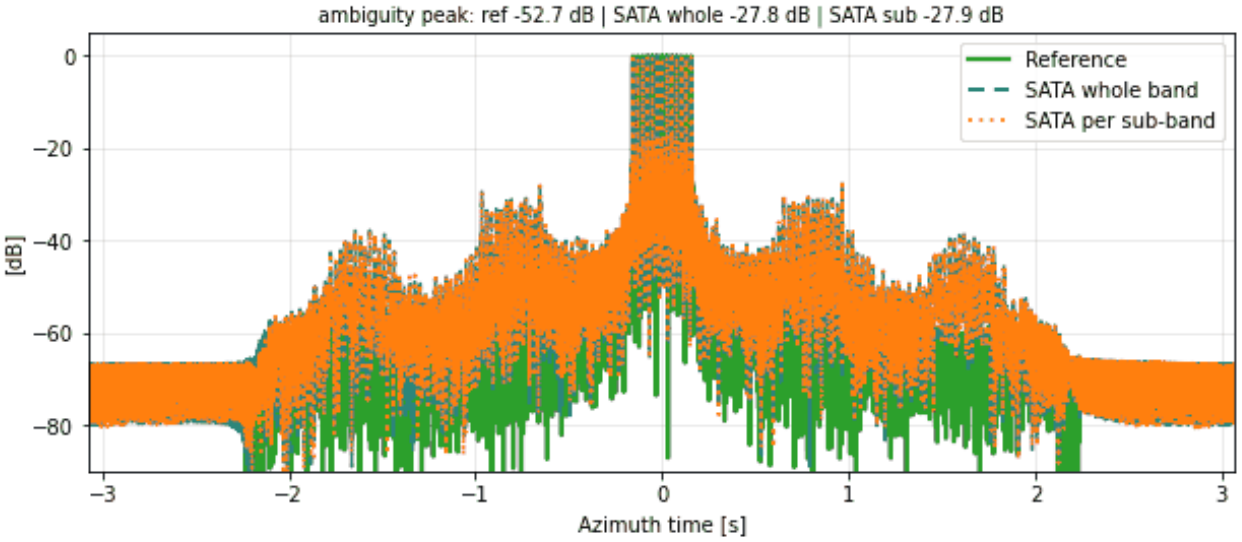





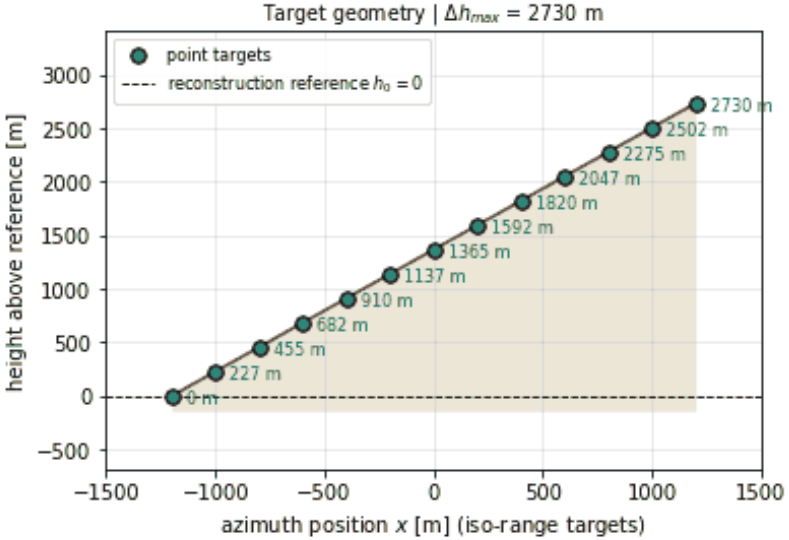



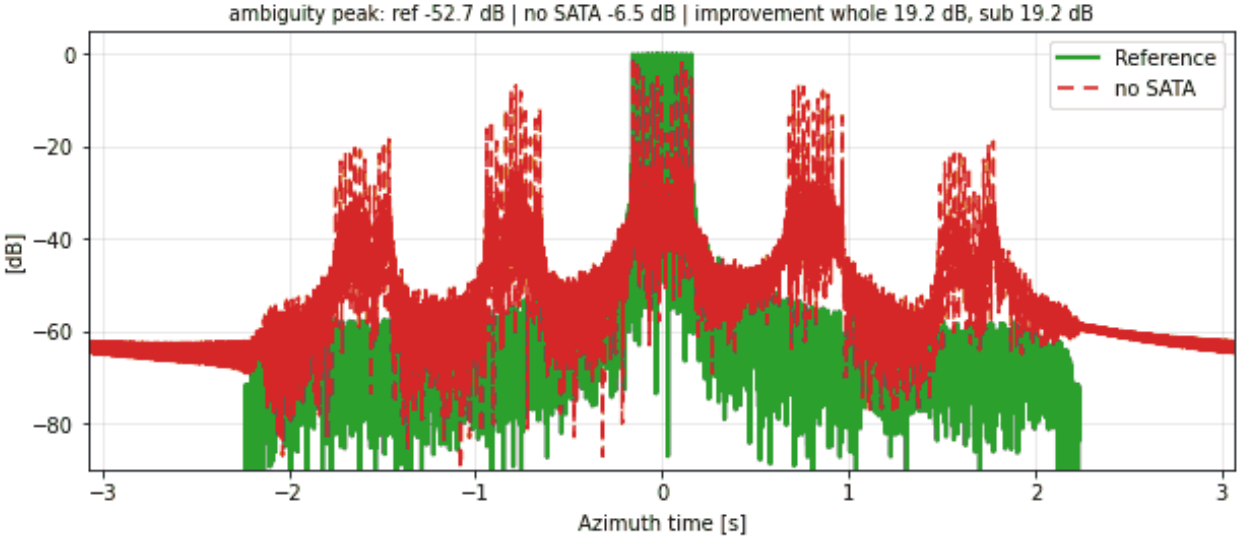



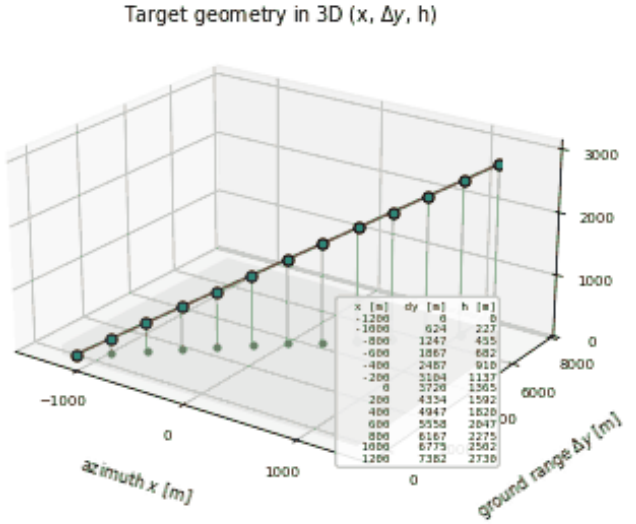
RA-SL-072 | SATA 1D | along-track ramp: N = 13, $\alpha = 5^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

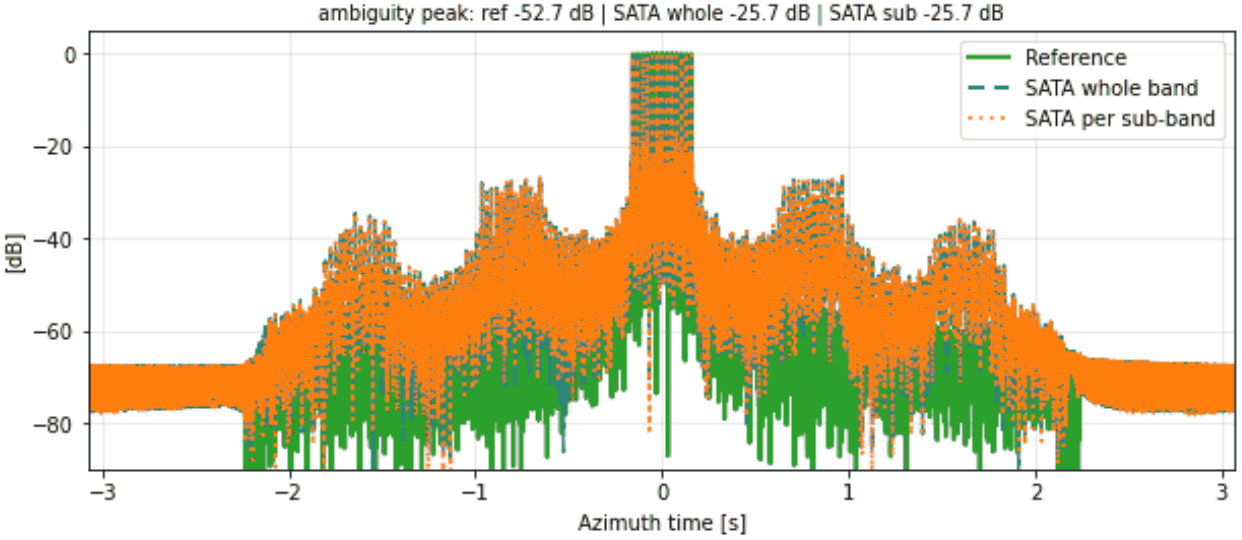






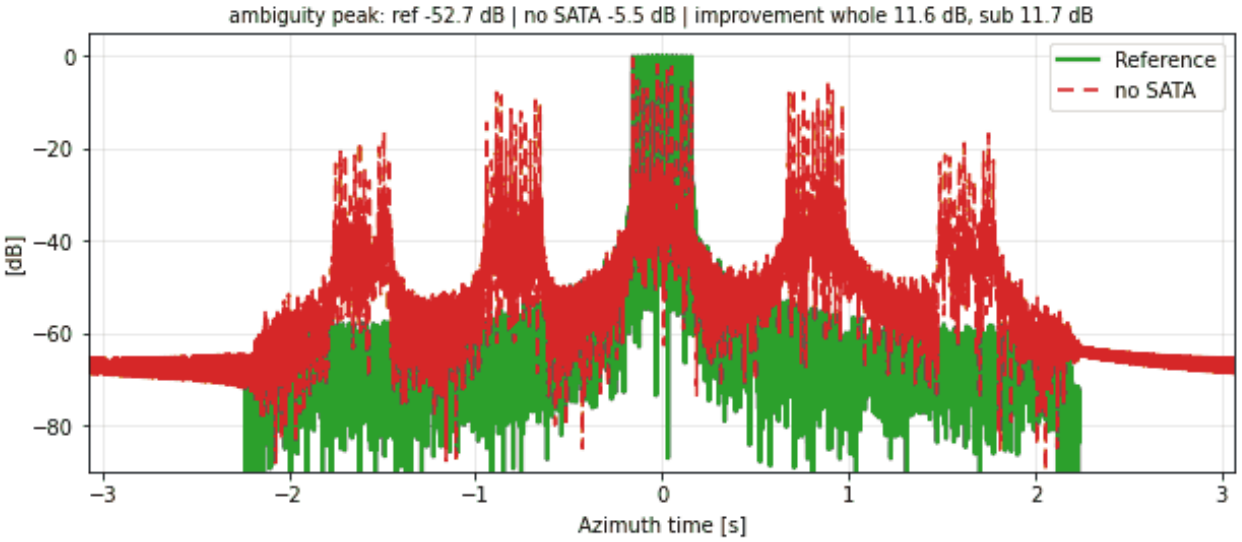



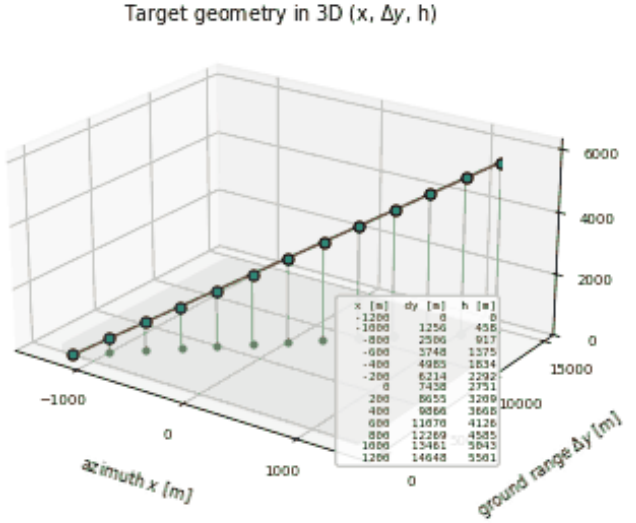



RA-SL-073 | SATA 1D | along-track ramp: N = 13, $\alpha = 10^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

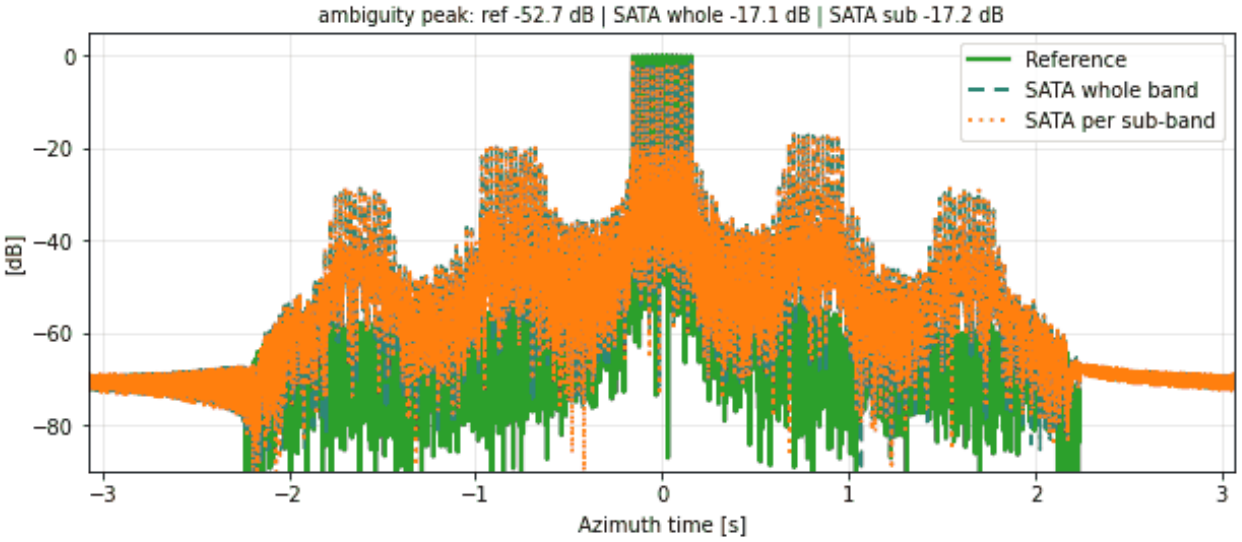


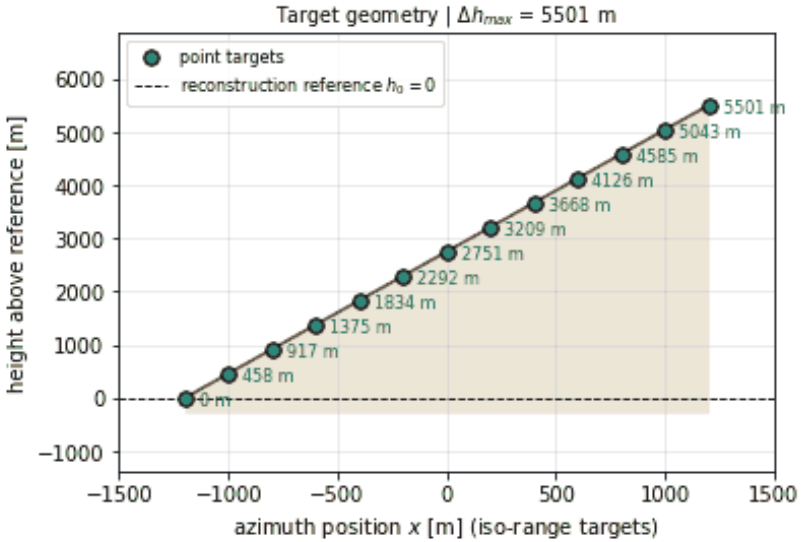



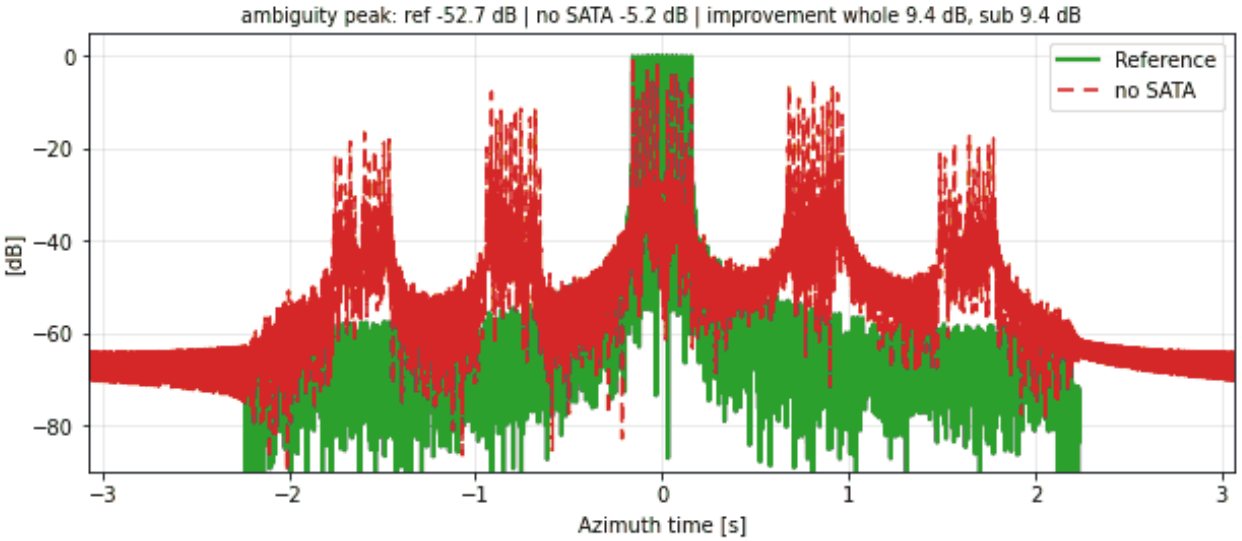



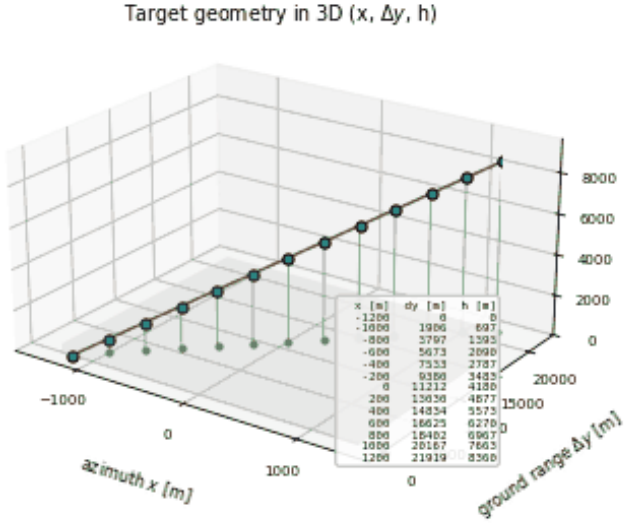



RA-SL-074 | SATA 1D | along-track ramp: N = 13, $\alpha = 15^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

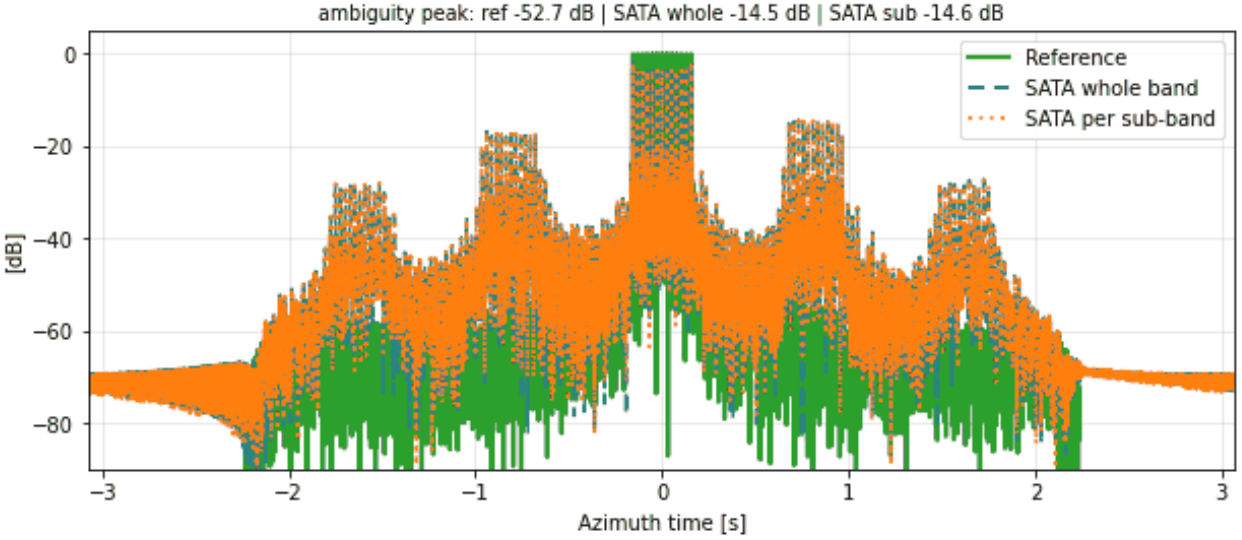


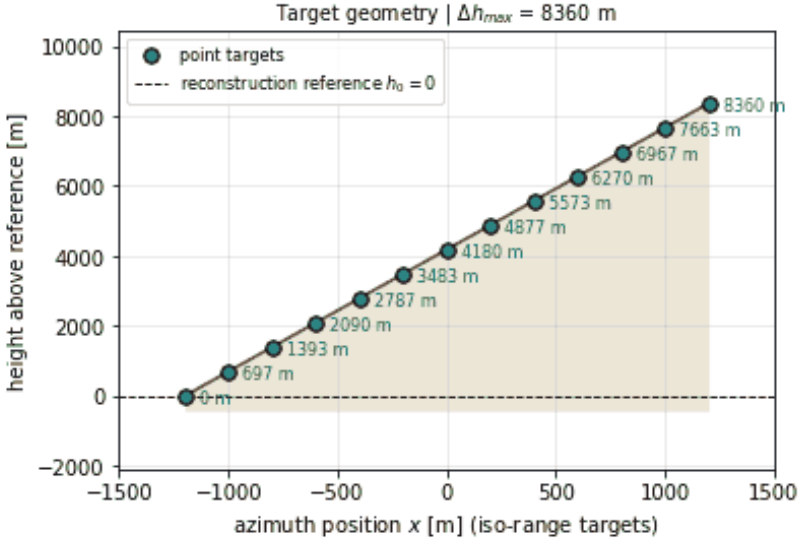



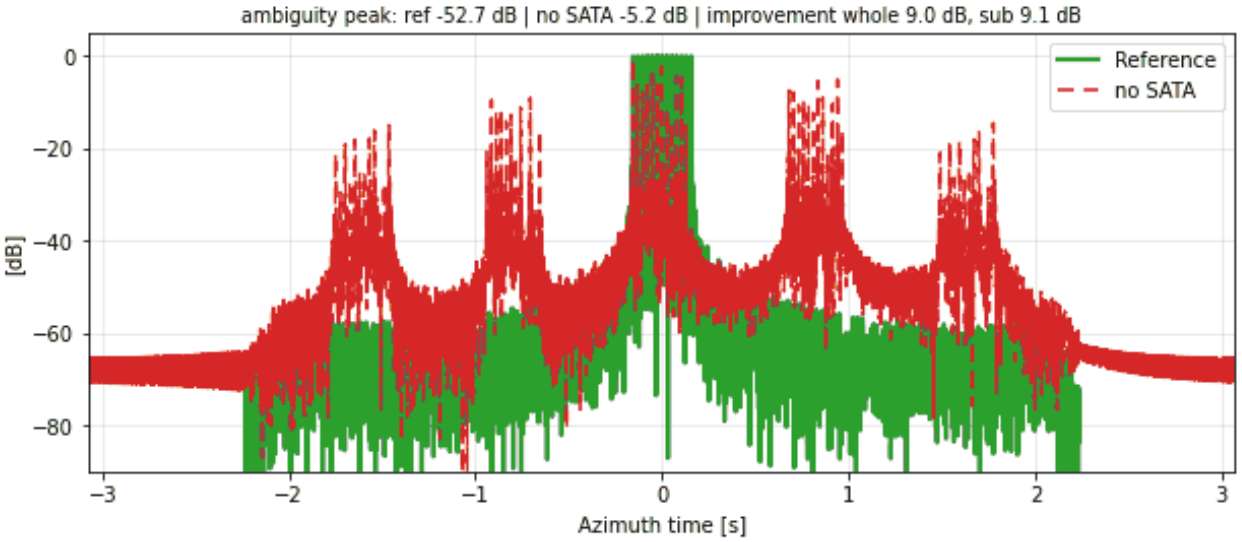



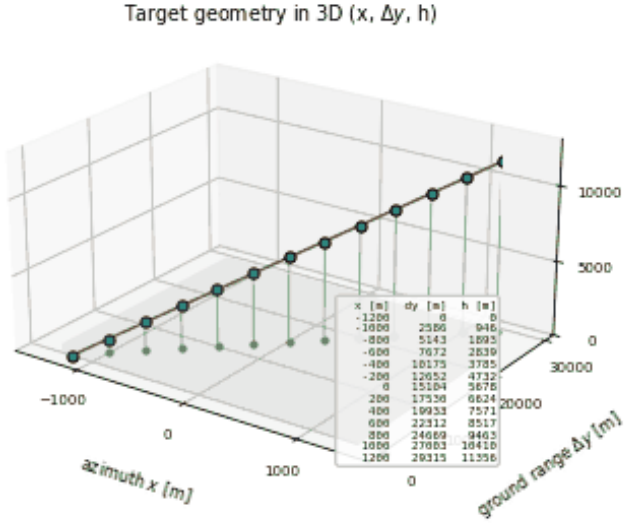



RA-SL-075 | SATA 1D | along-track ramp: N = 13, $\alpha = 20^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

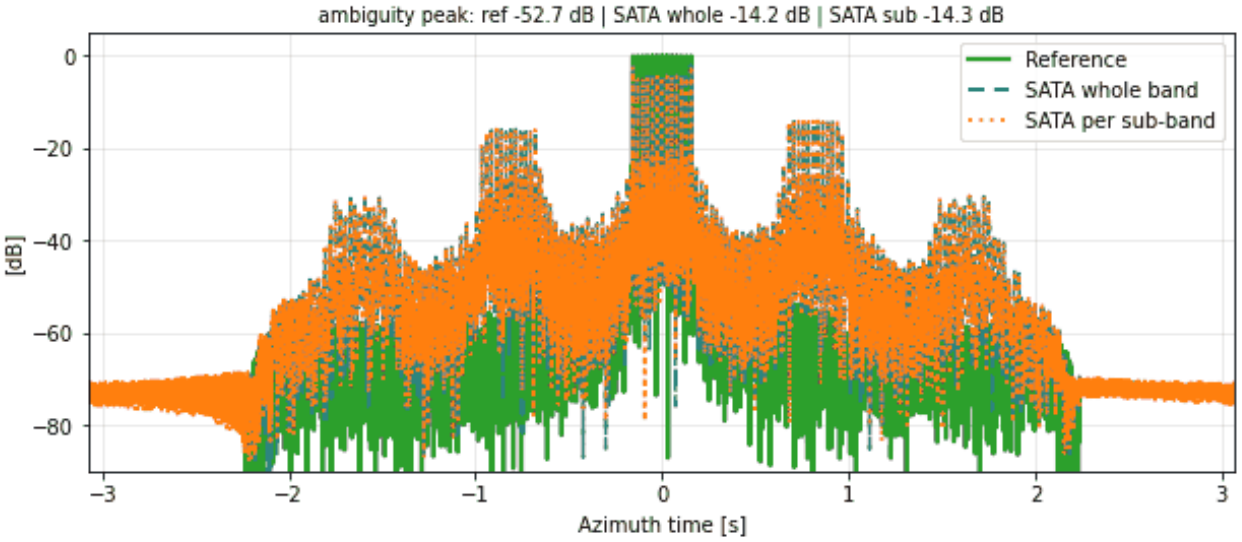


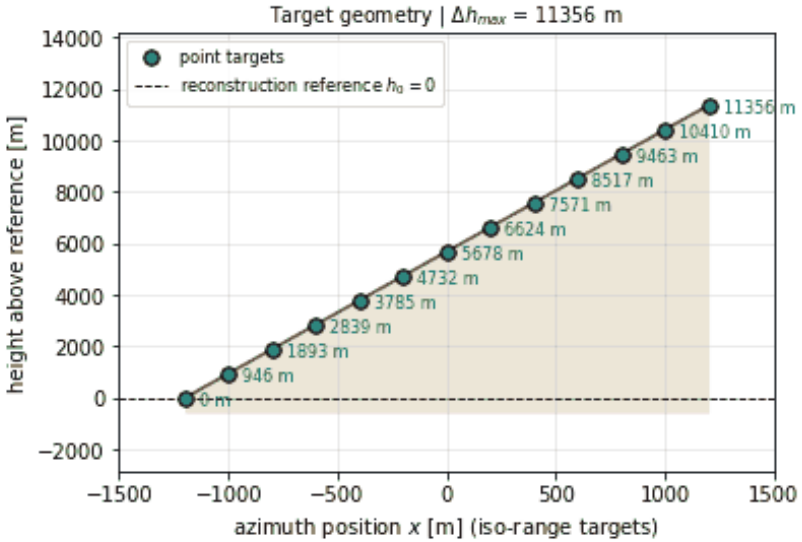



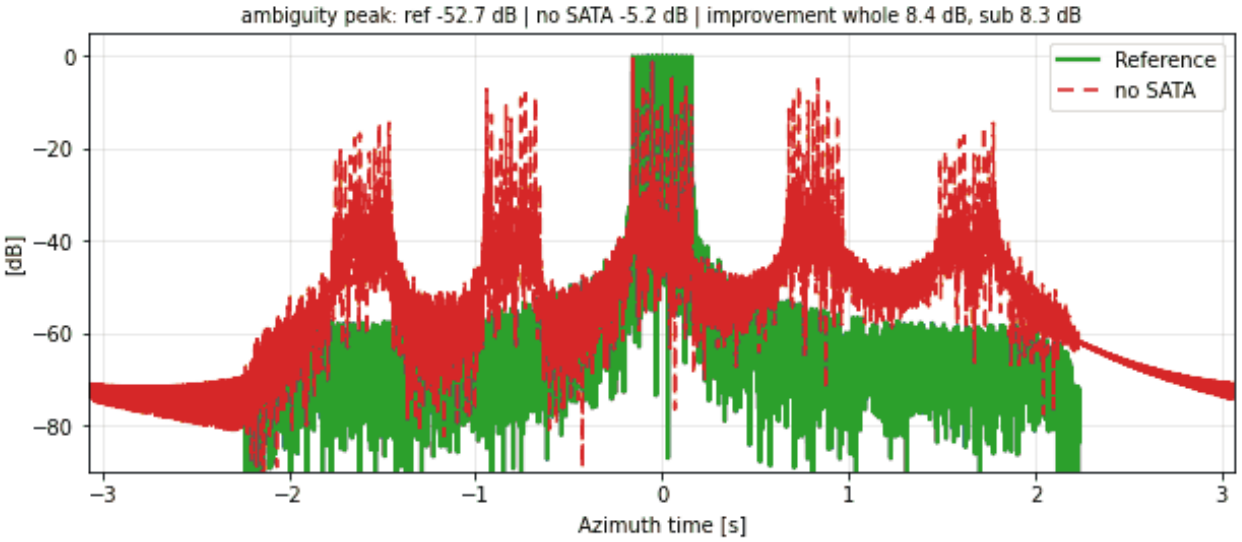



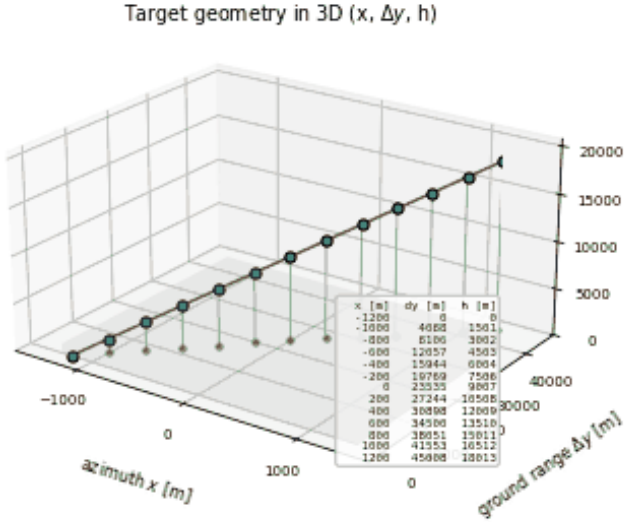



RA-SL-076 | SATA 1D | along-track ramp: N = 13, $\alpha = 30^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

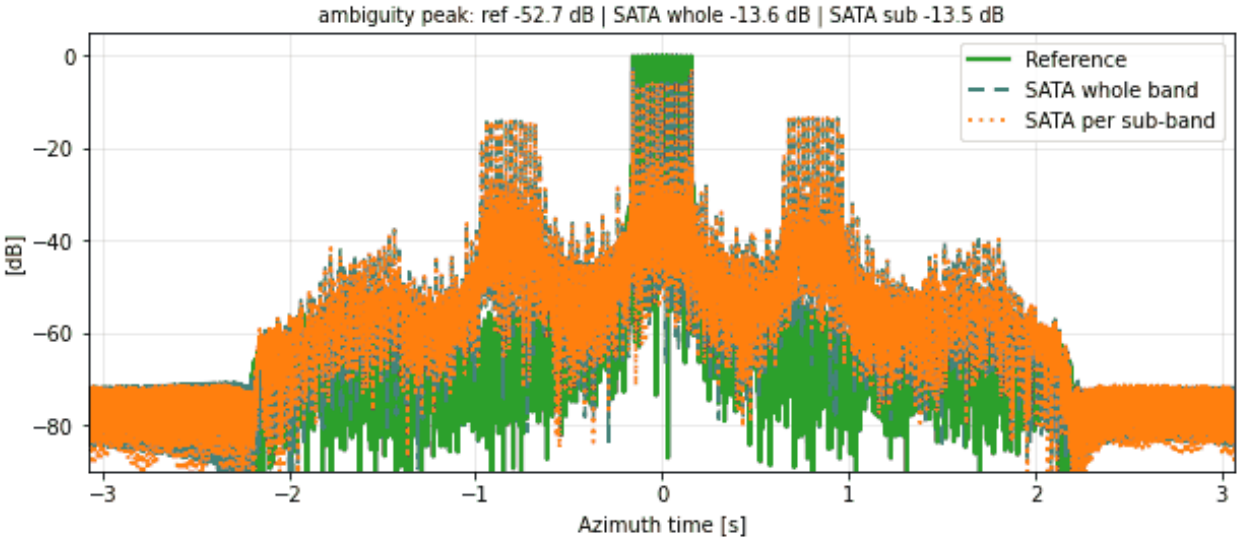

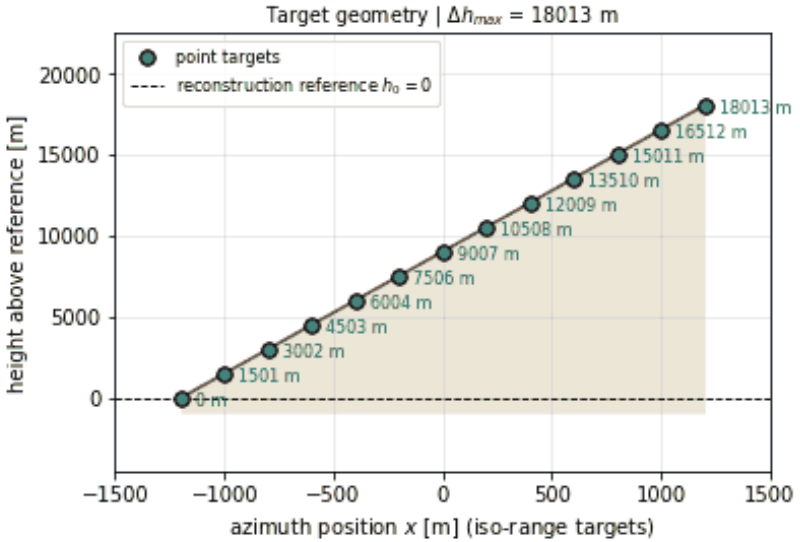



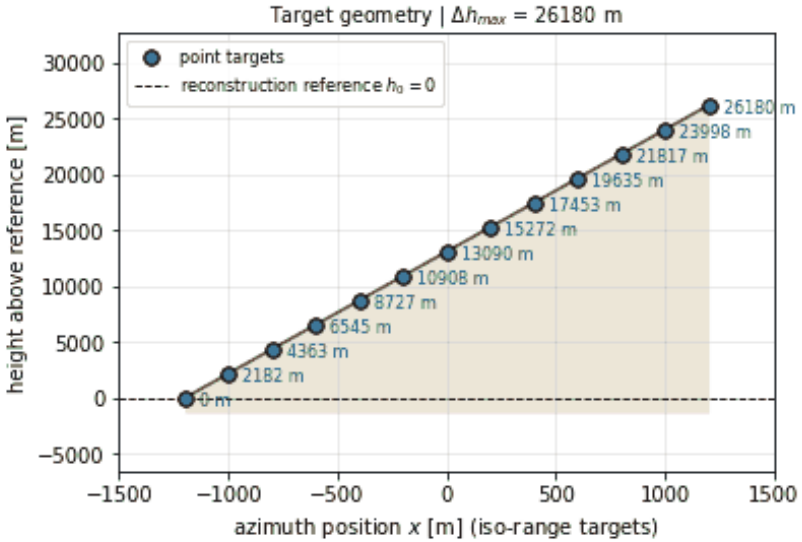



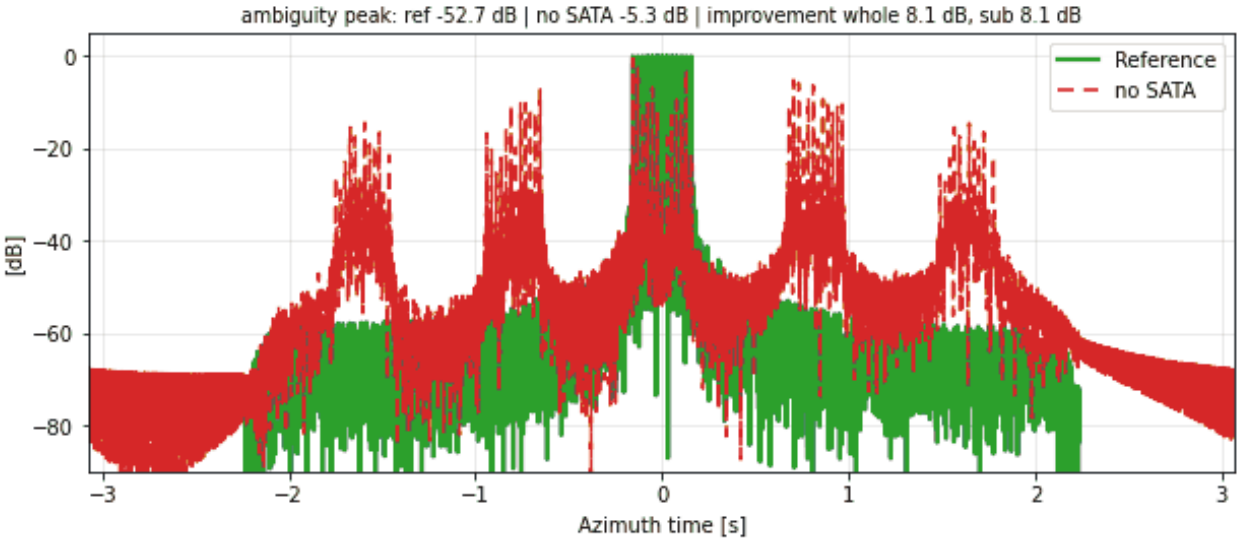



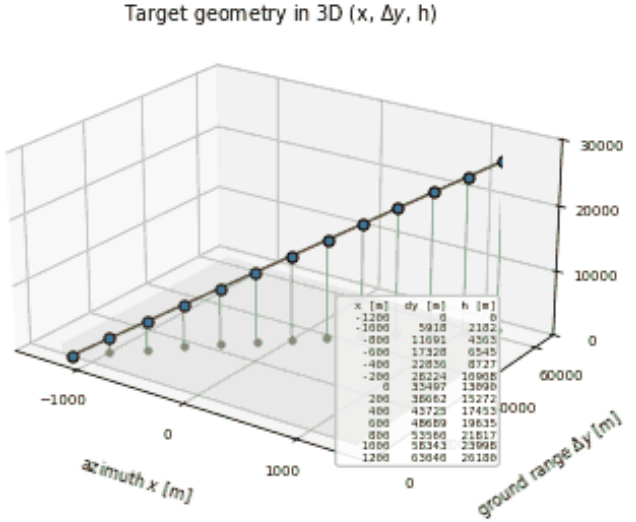
RA-SL-077 | SATA 1D | along-track ramp: N = 13, $\alpha = 40°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

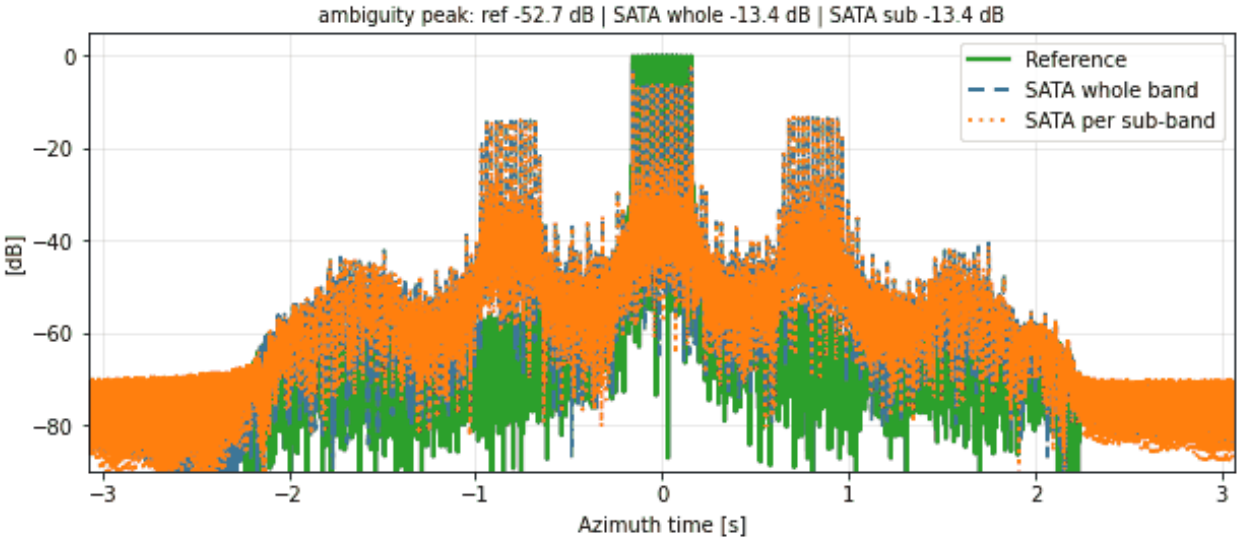






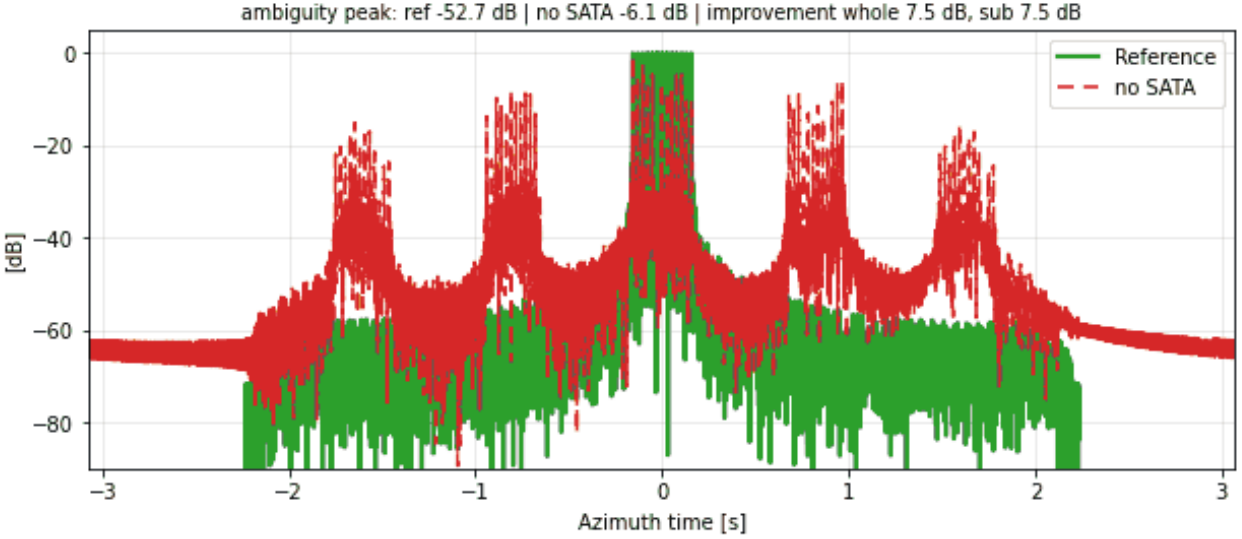



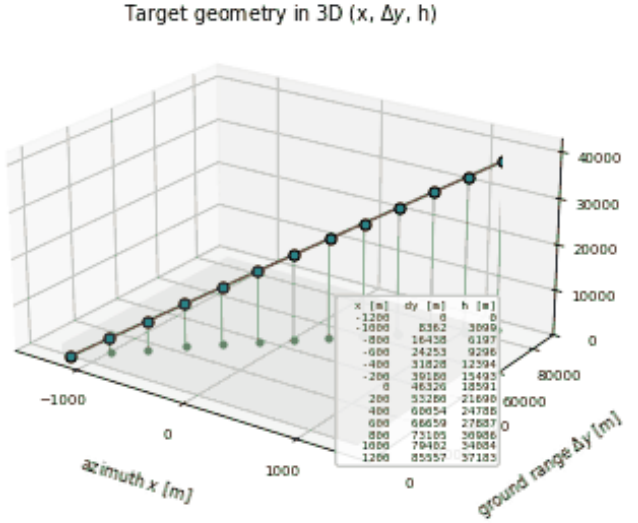



RA-SL-078 | SATA 1D | along-track ramp: N = 13, $\alpha = 50°$ (heights $j \cdot 2600\tan\alpha$), targets 200 m apart (small distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

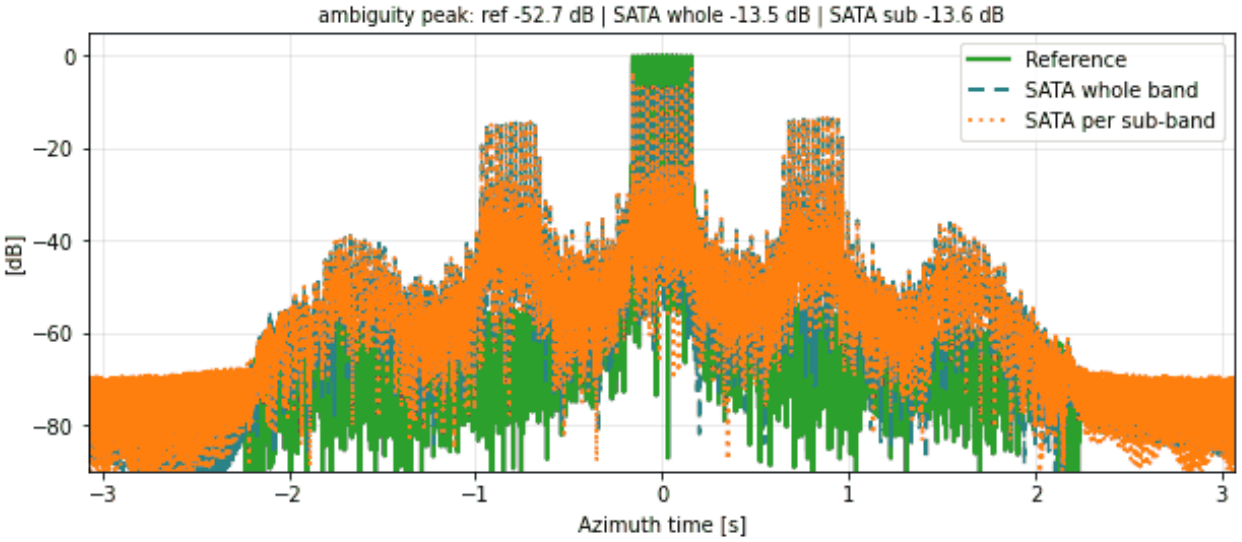


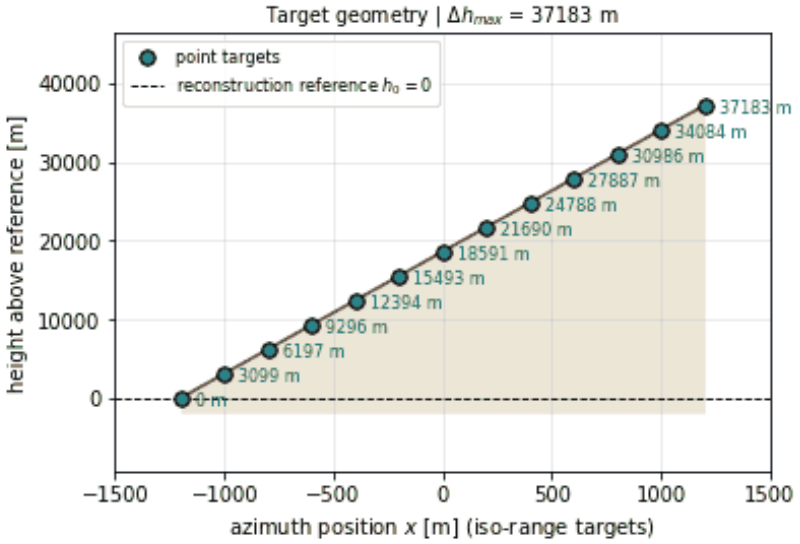



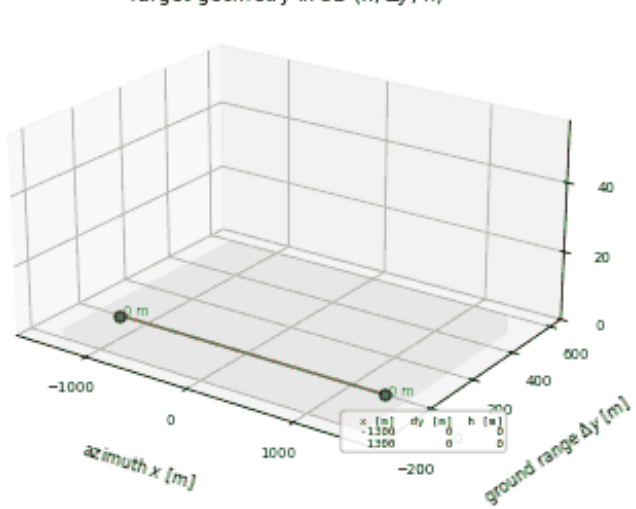
RA-NS-001 | SATA 1D | along-track ramp: N = 2, $\alpha = 0.1°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



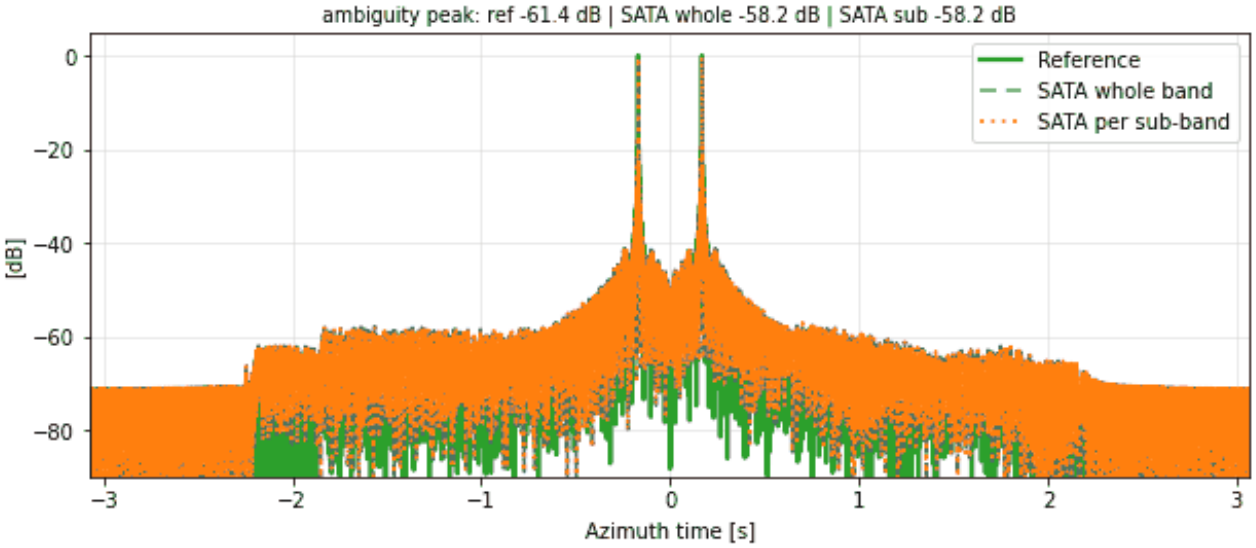



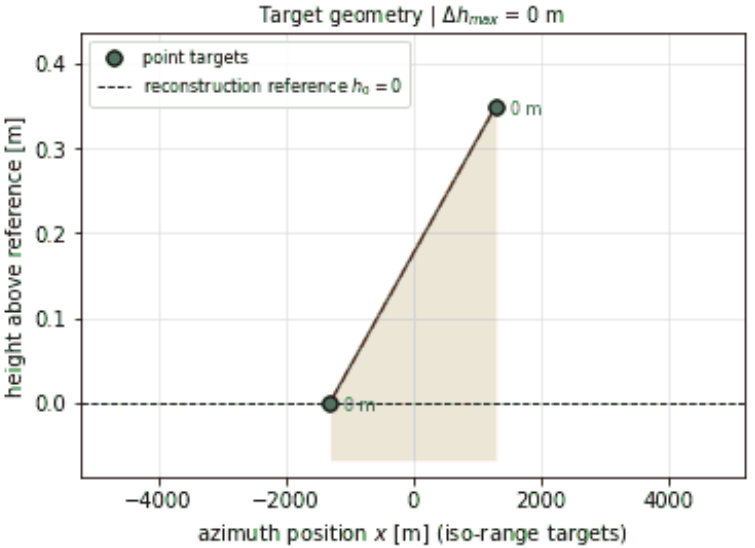


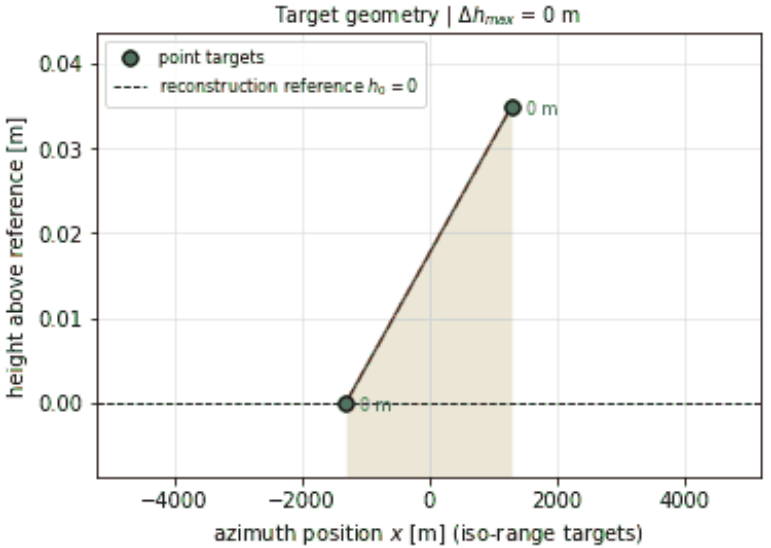





RA-NS-002 | SATA 1D | along-track ramp: N = 2, $\alpha = 1°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

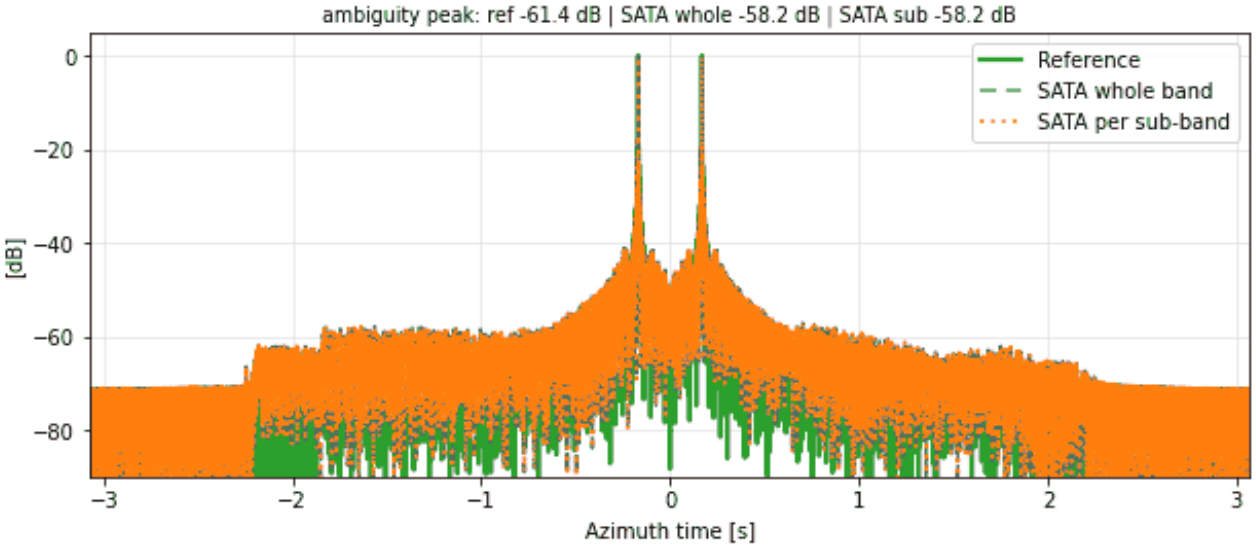


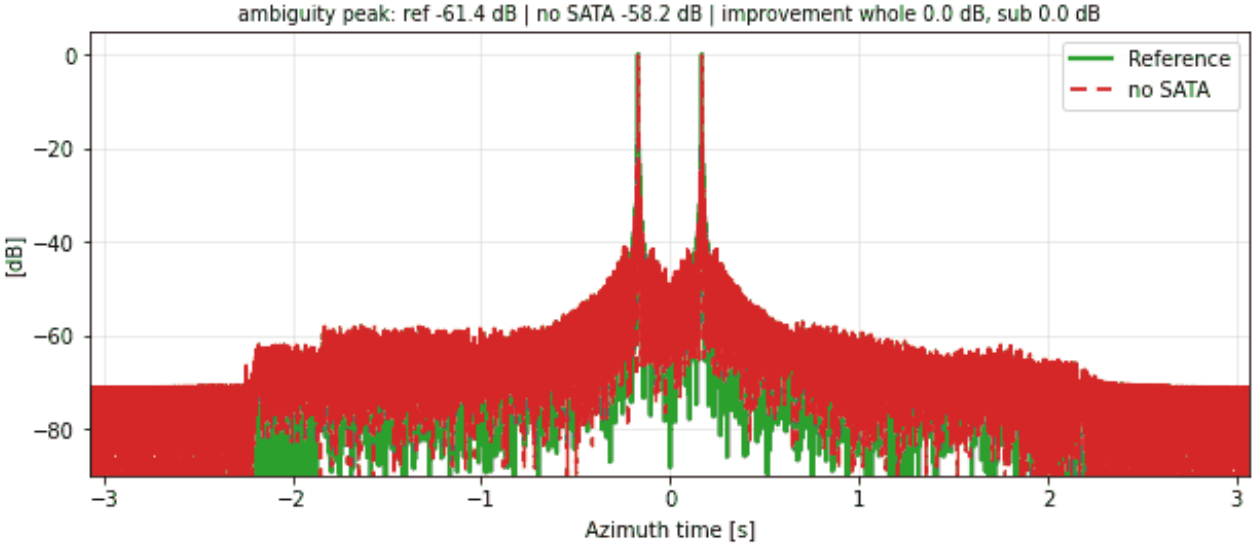



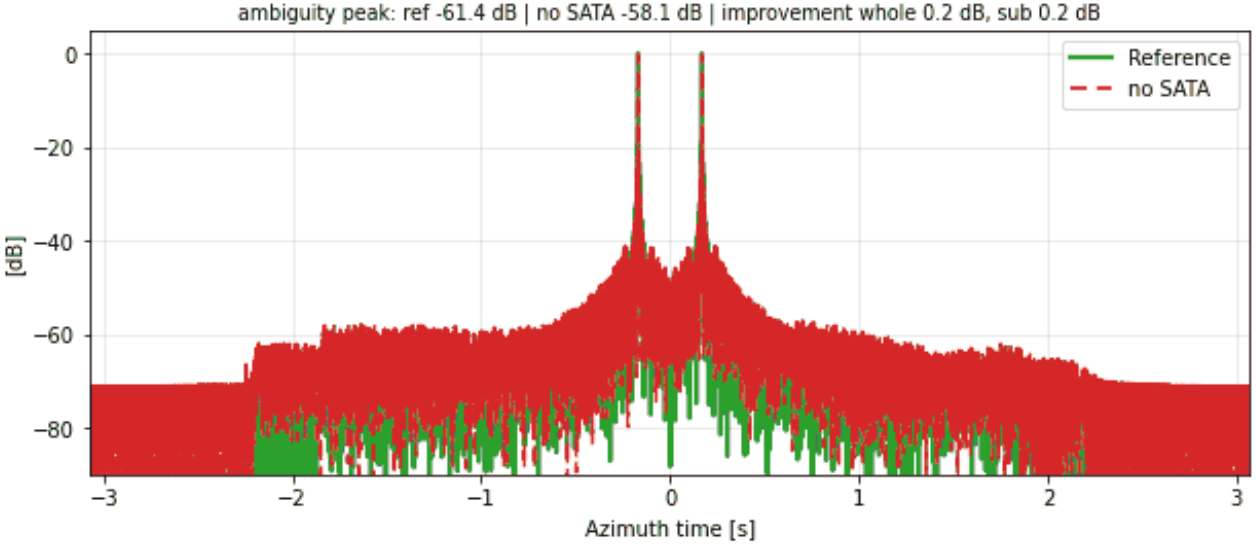


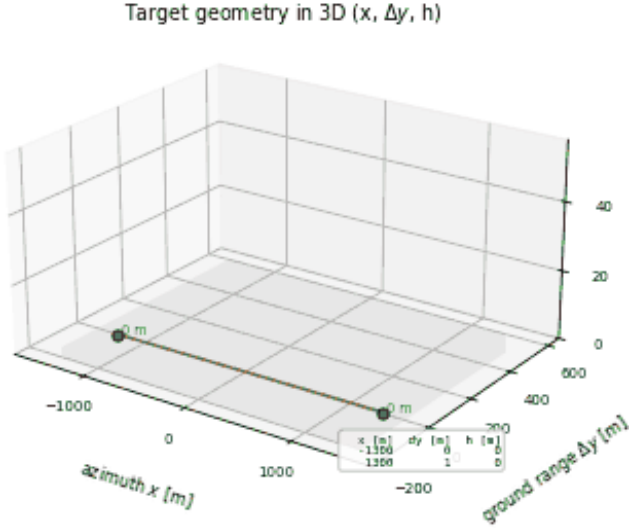
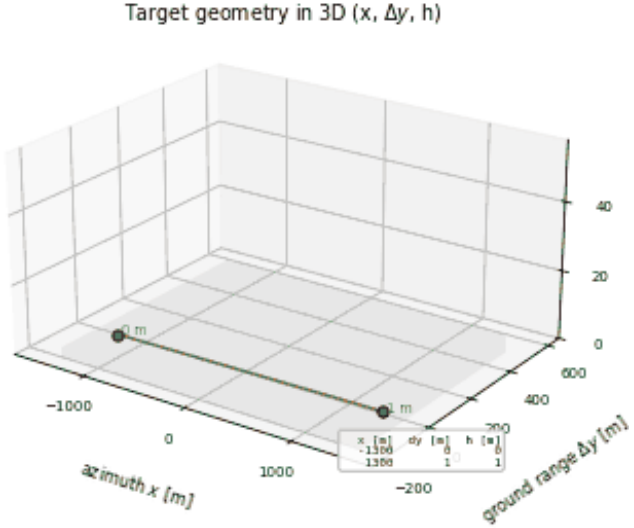



RA-NS-003 | SATA 1D | along-track ramp: N = 2, $\alpha = 1.5°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

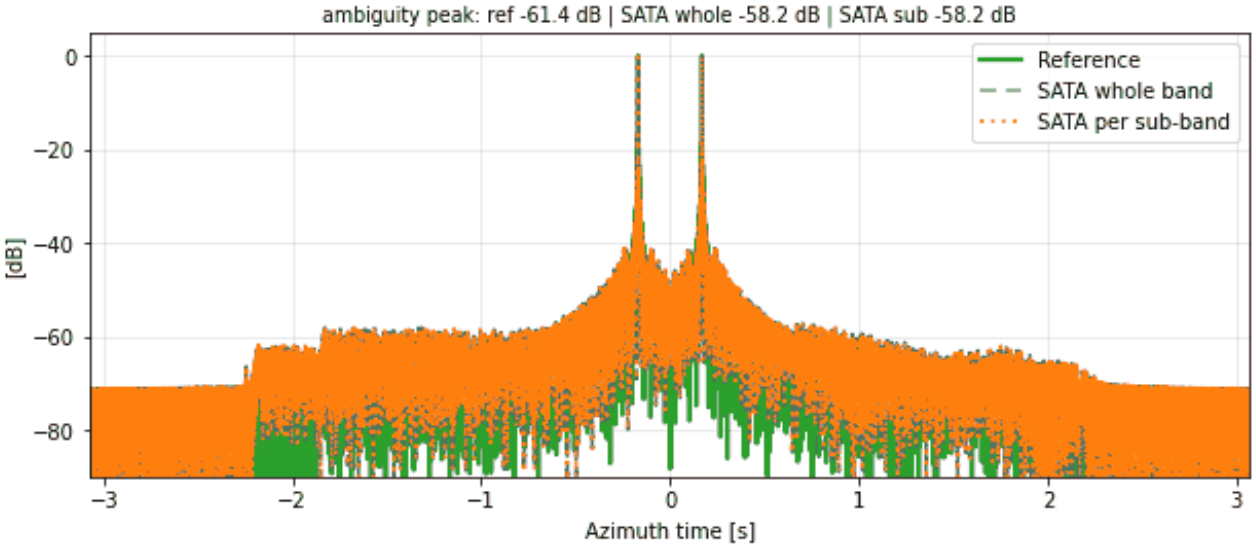

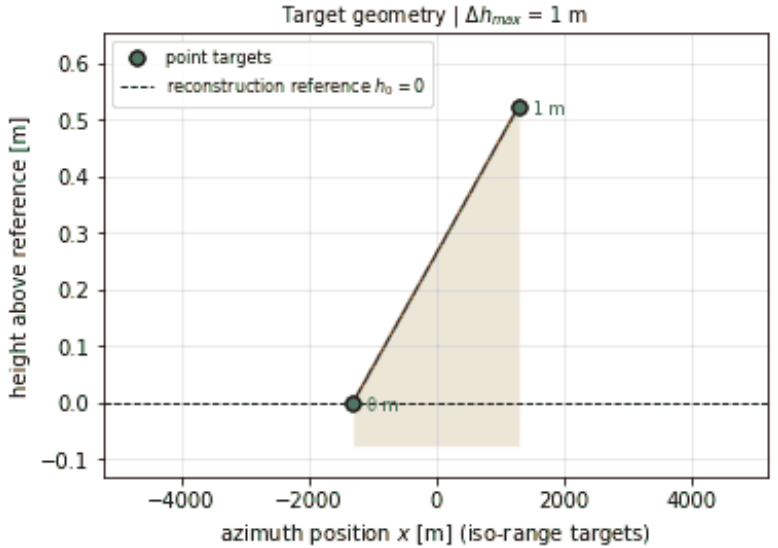



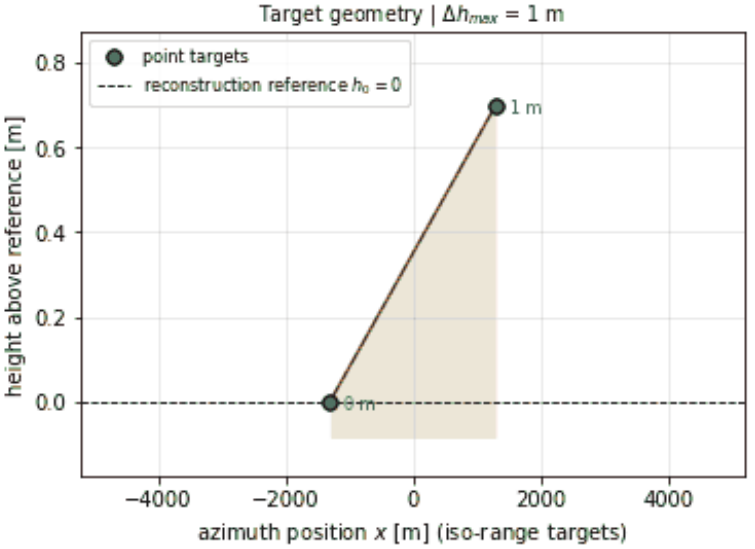



RA-NS-004 | SATA 1D | along-track ramp: N = 2, $\alpha = 2°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights


$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



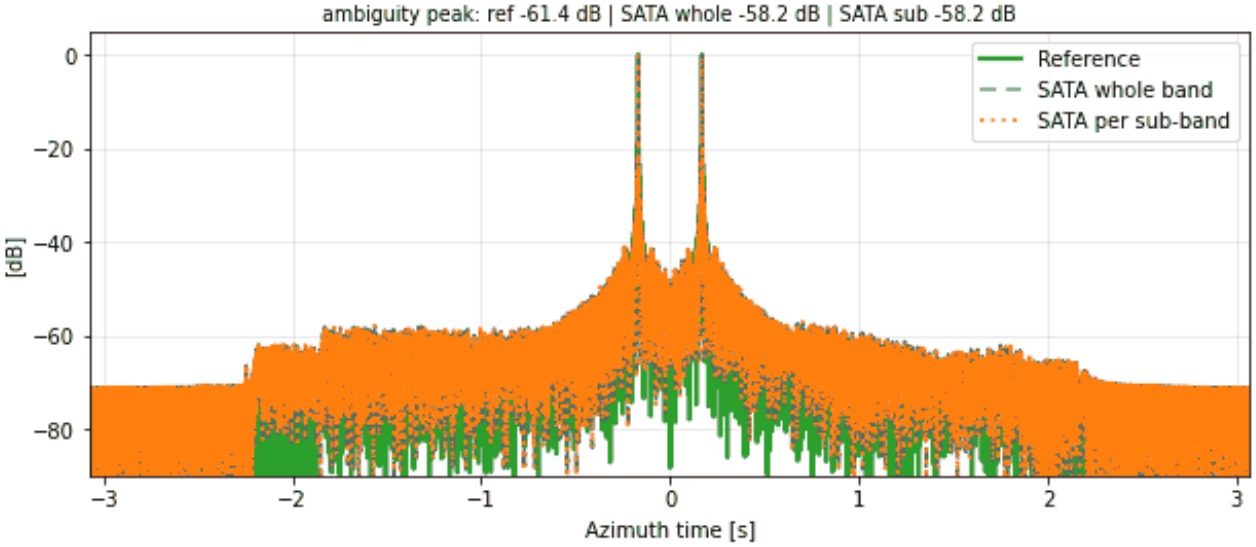



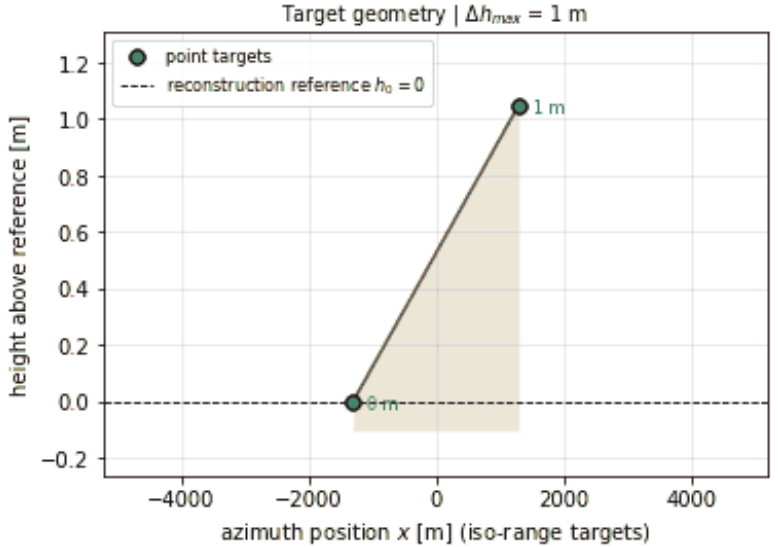





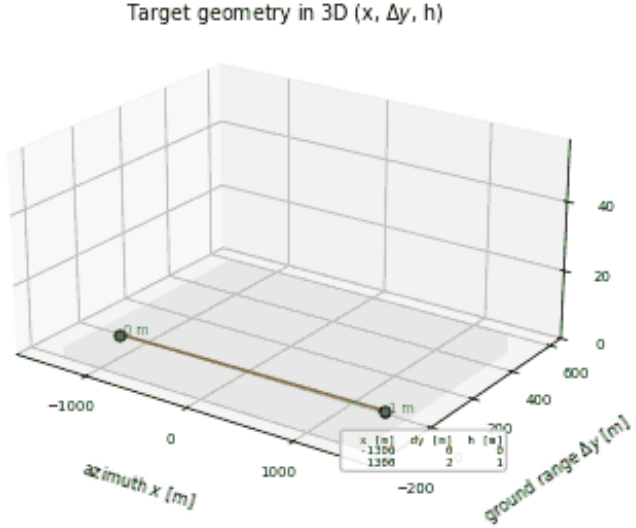


RA-NS-005 | SATA 1D | along-track ramp: N = 2, $\alpha = 3°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

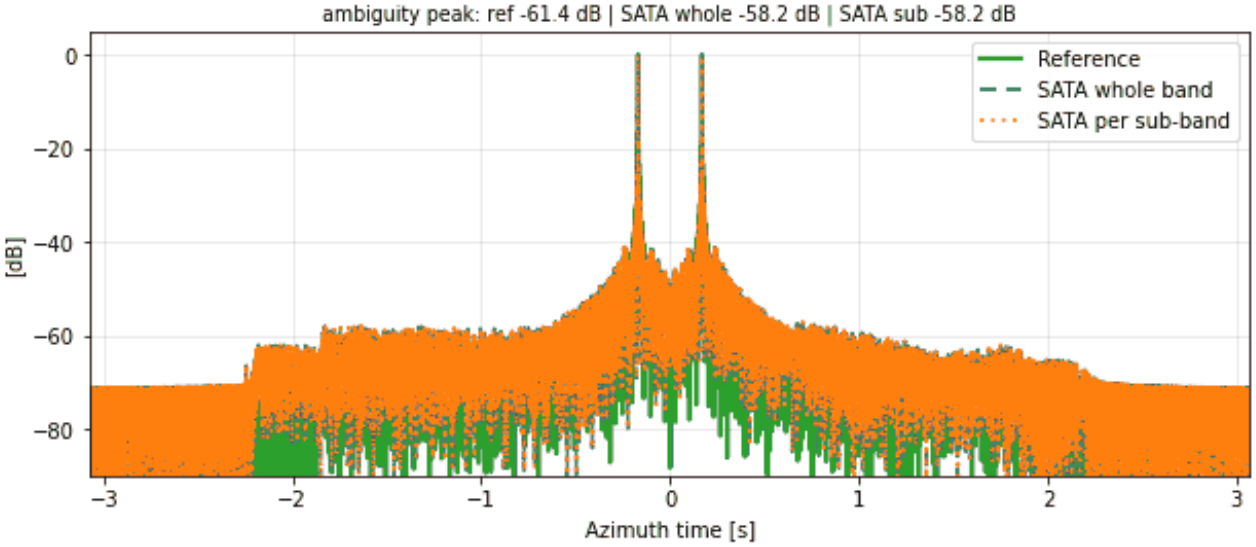


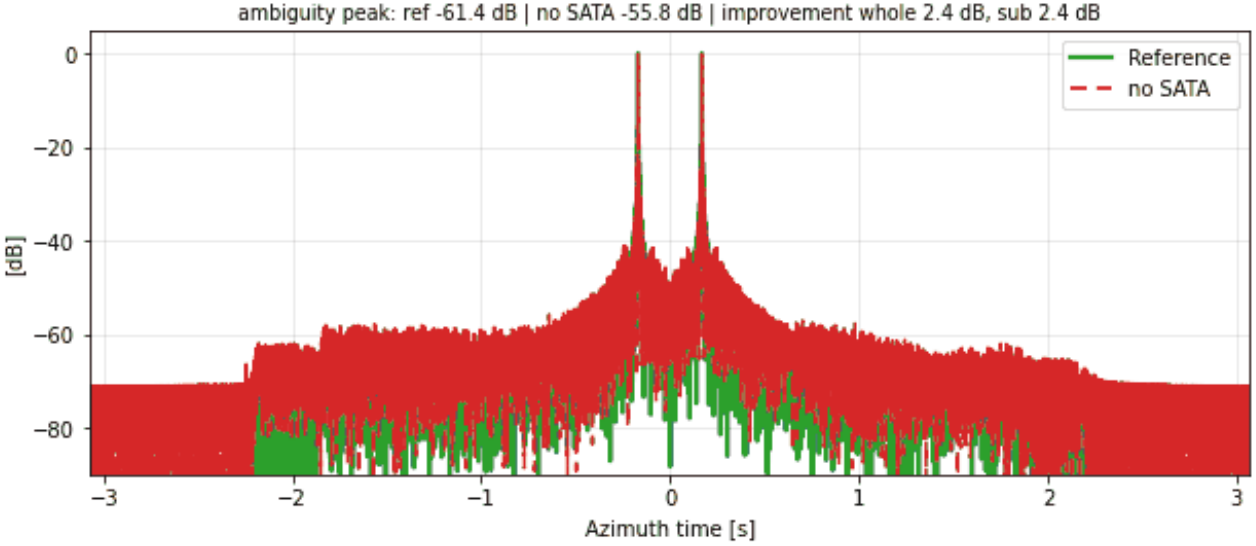



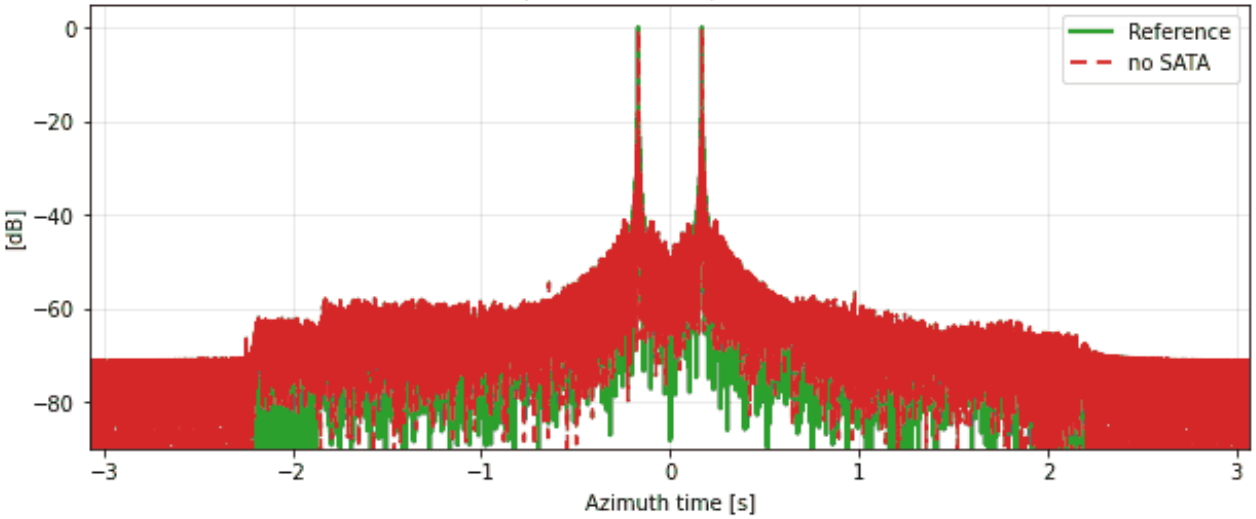


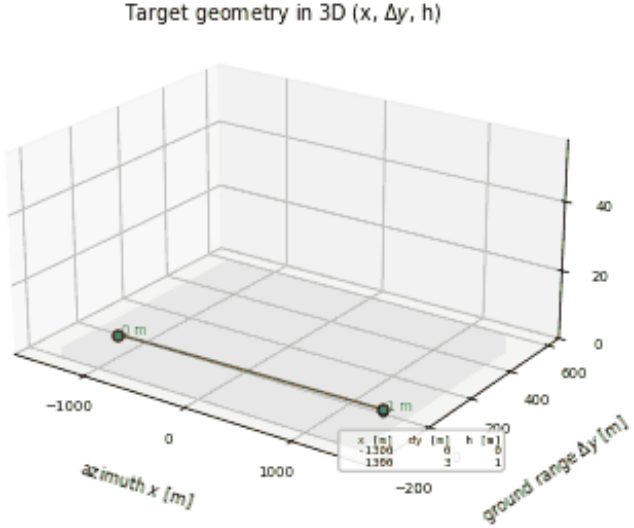
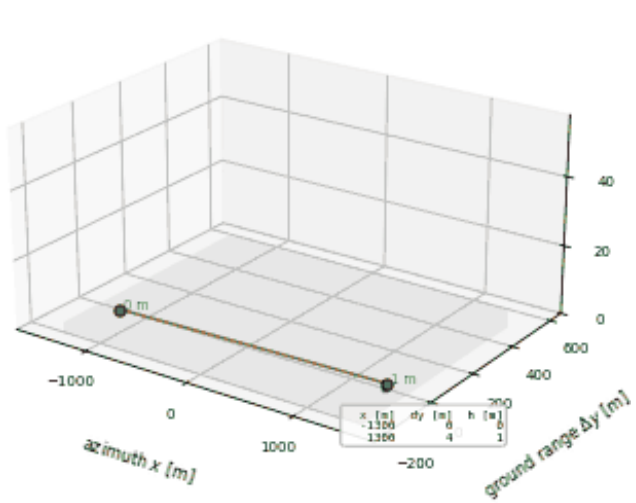



RA-NS-006 | SATA 1D | along-track ramp: N = 2, $\alpha = 4°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

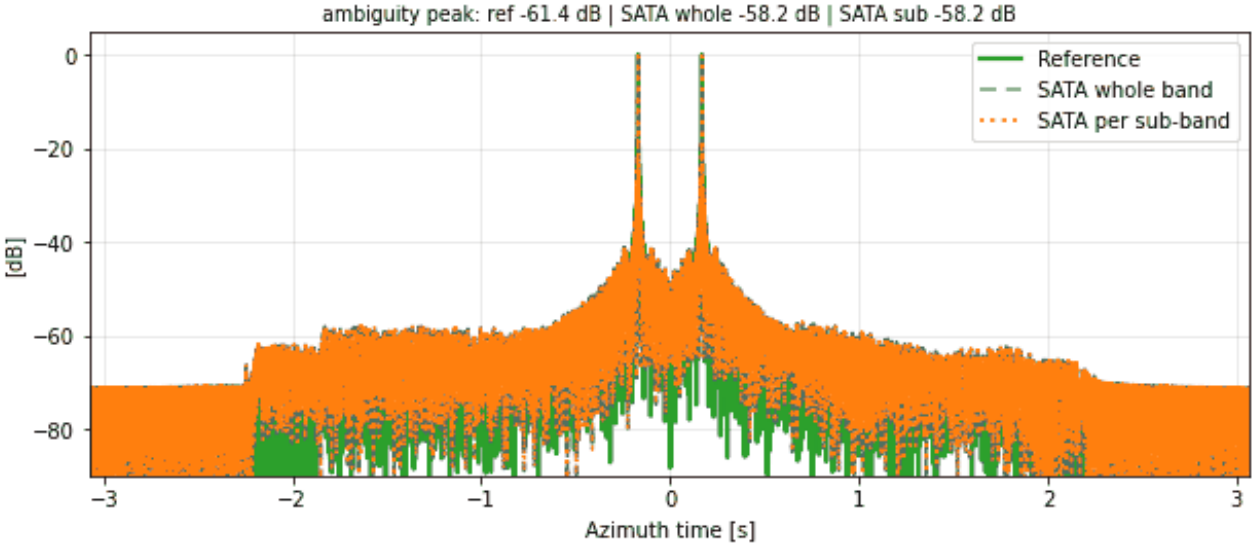


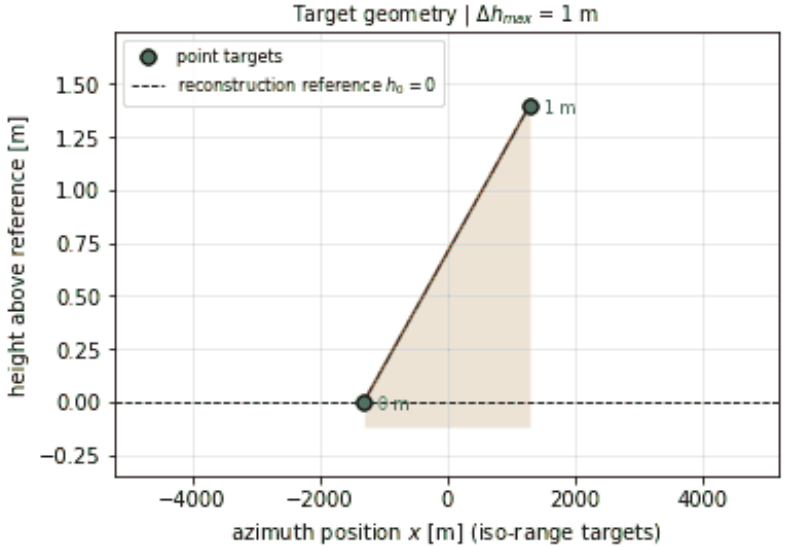



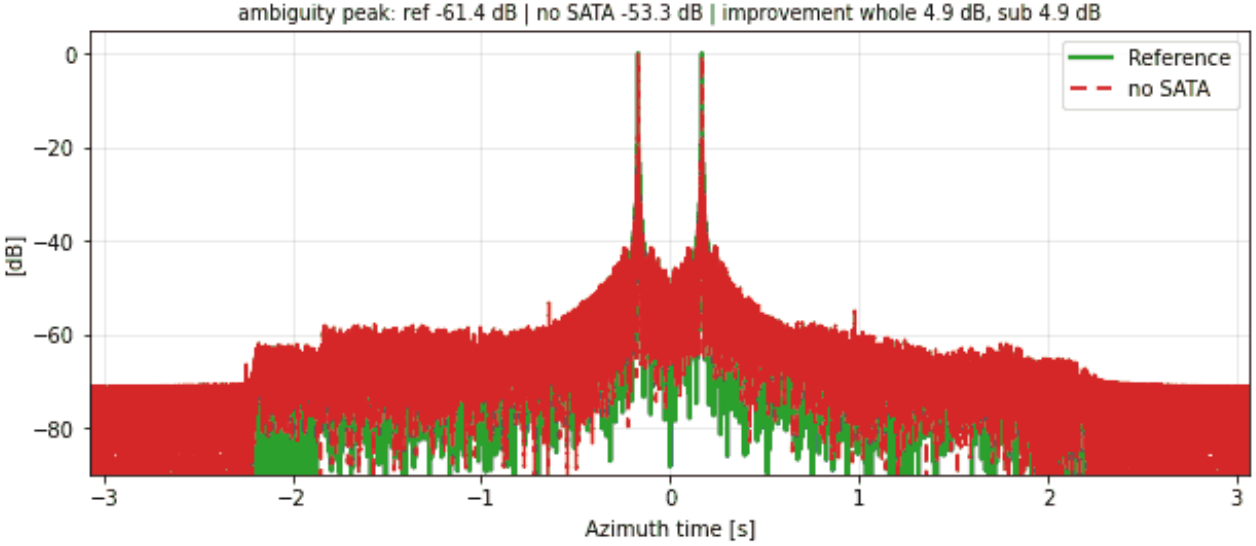



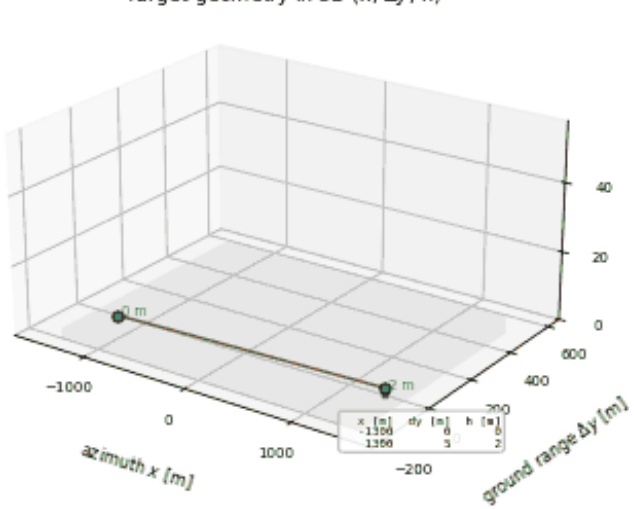



RA-NS-007 | SATA 1D | along-track ramp: N = 2, $\alpha = 5°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

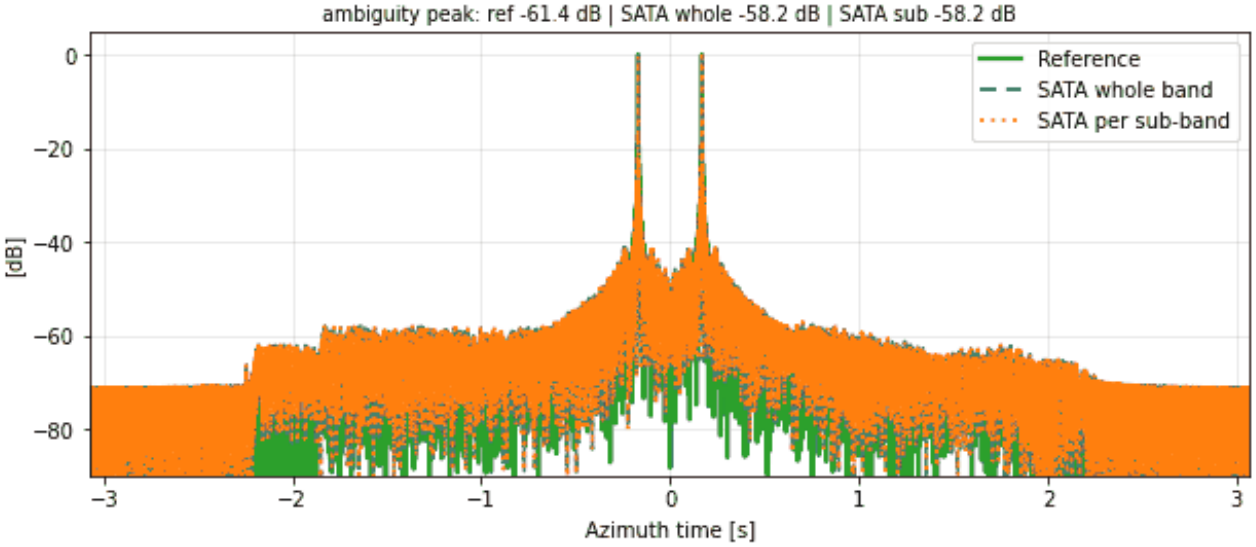


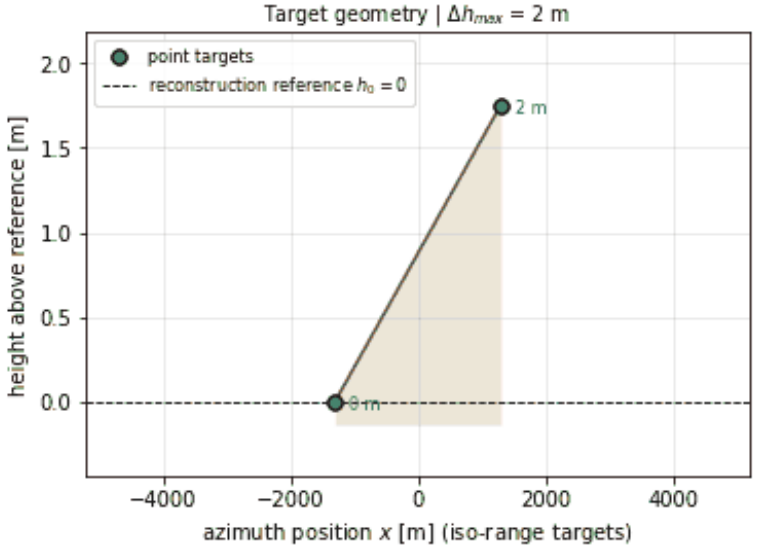



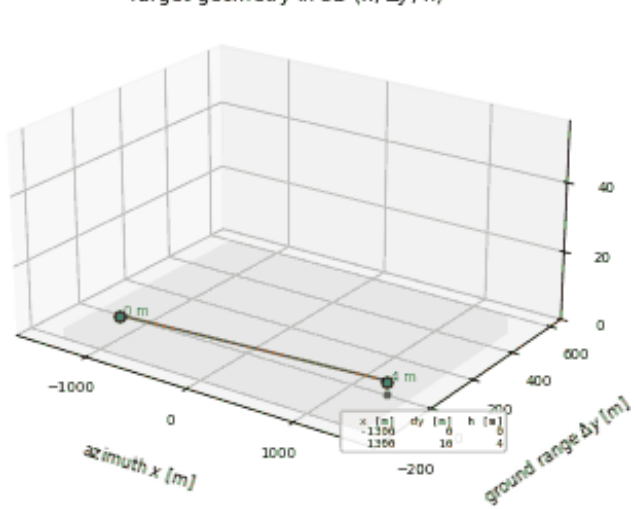
RA-NS-008 | SATA 1D | along-track ramp: N = 2, $\alpha = 10^\circ$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



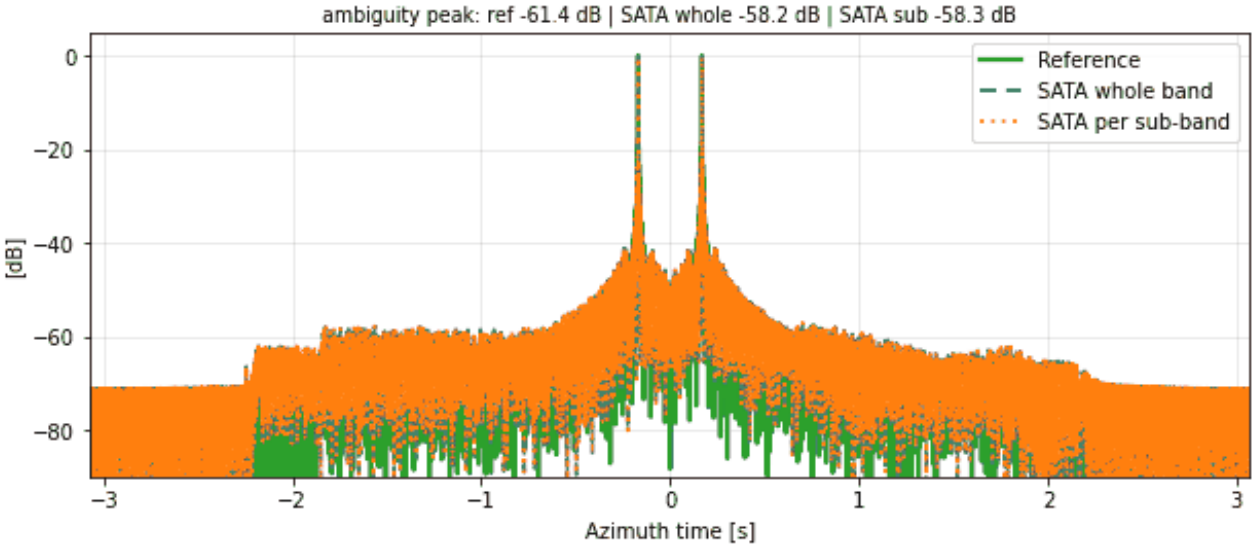



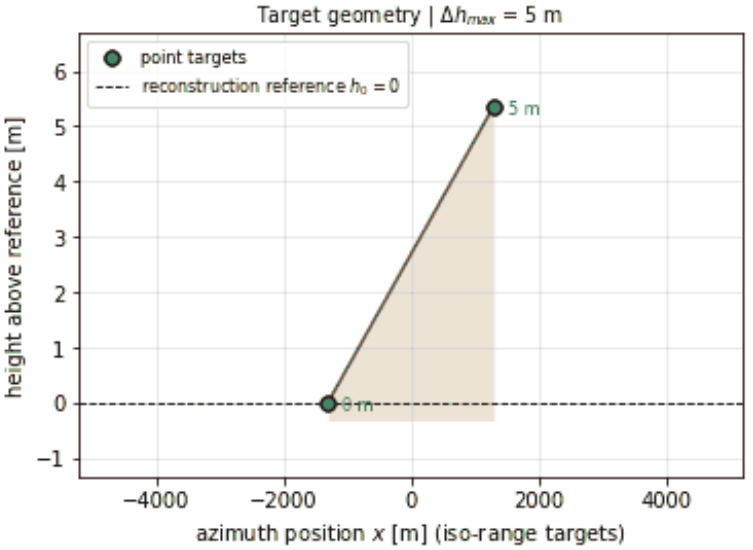


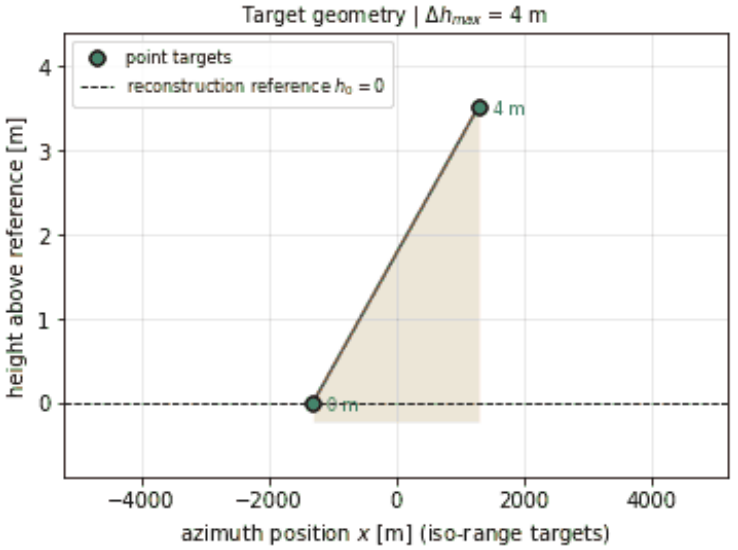





RA-NS-009 | SATA 1D | along-track ramp: N = 2, $\alpha = 15^\circ$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

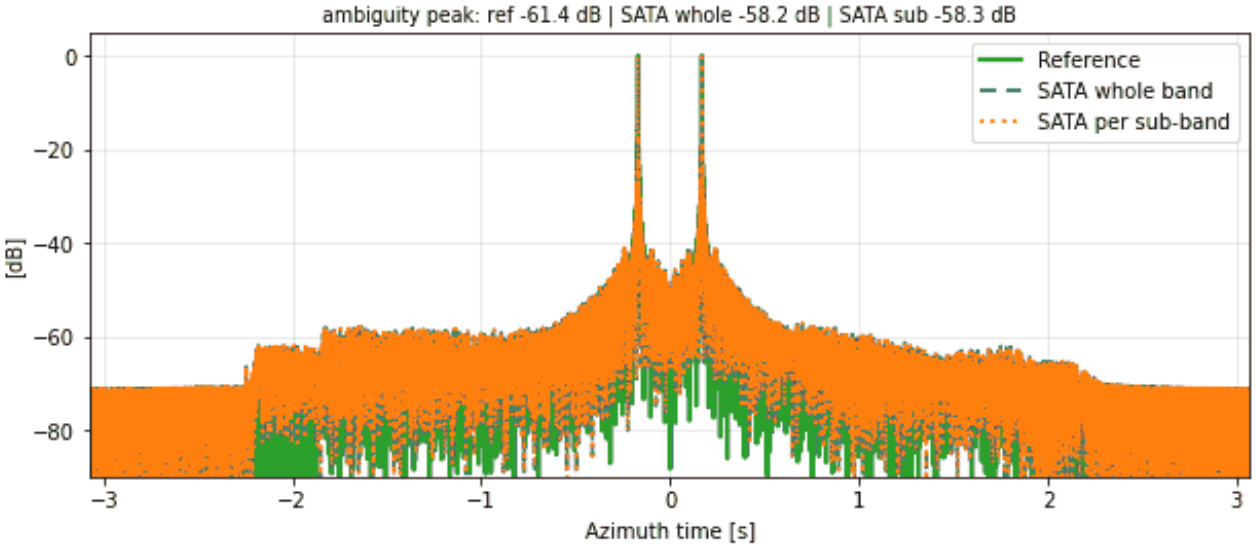


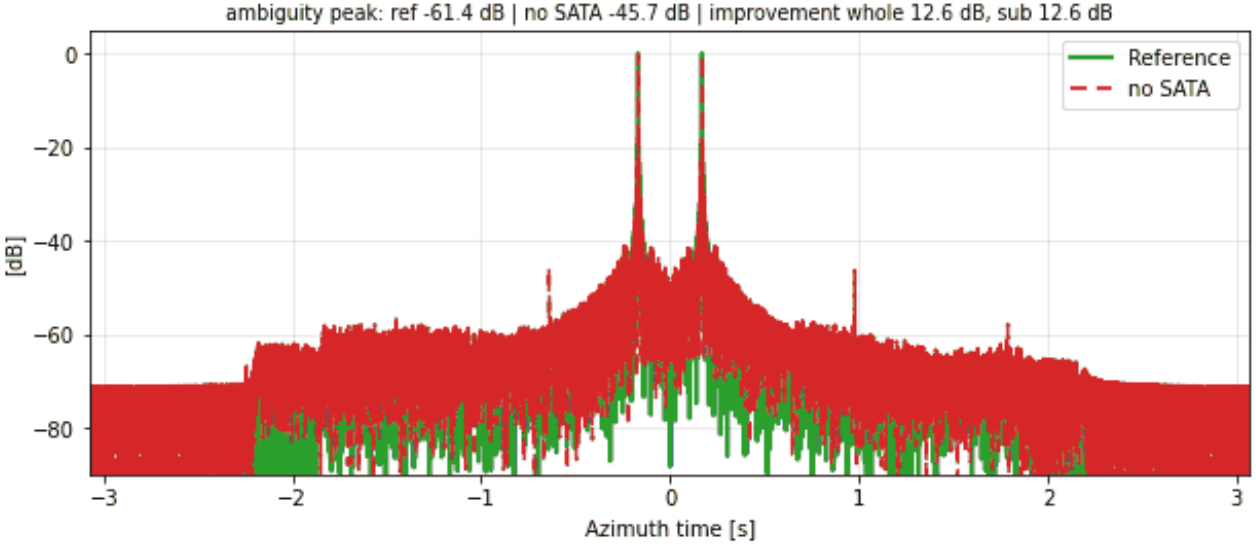



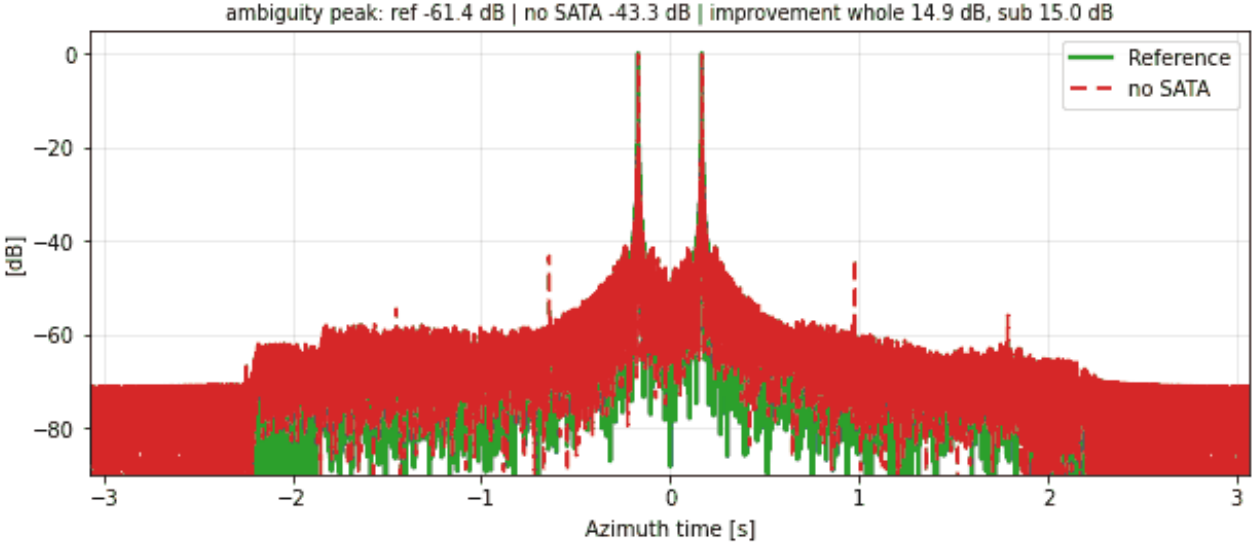


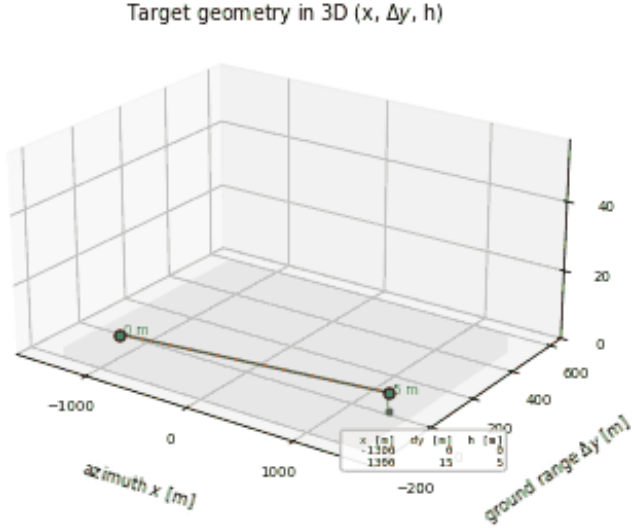
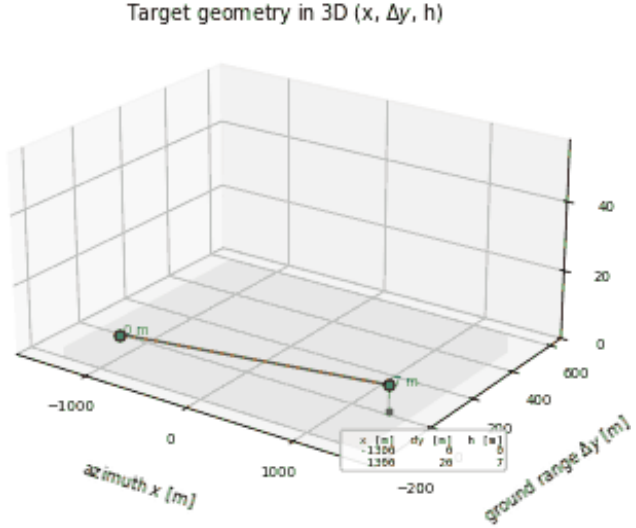



RA-NS-010 | SATA 1D | along-track ramp: N = 2, $\alpha = 20^\circ$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

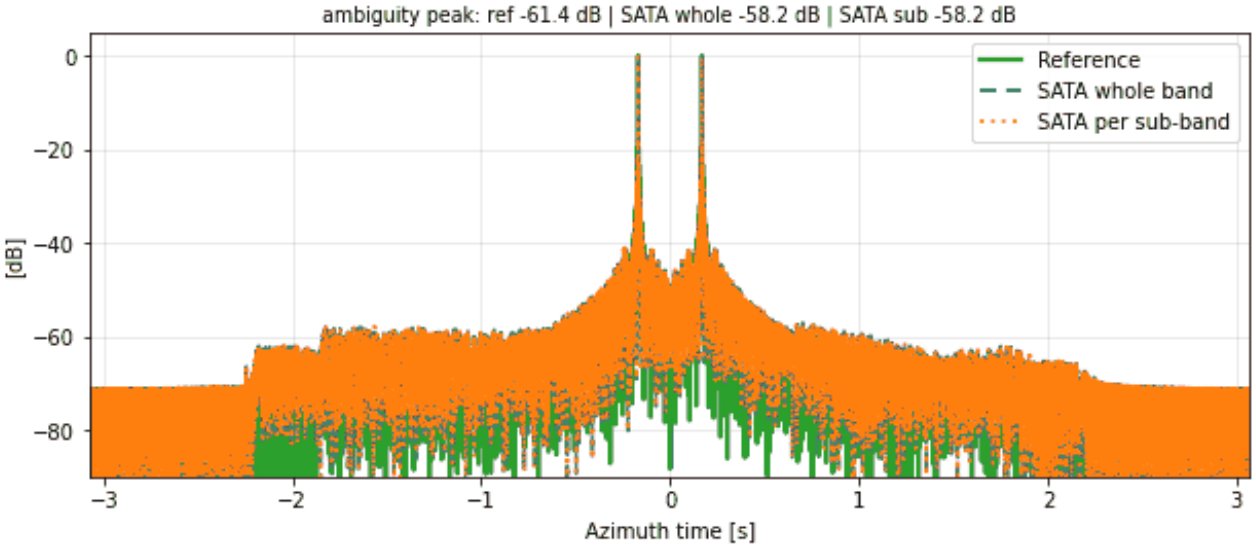


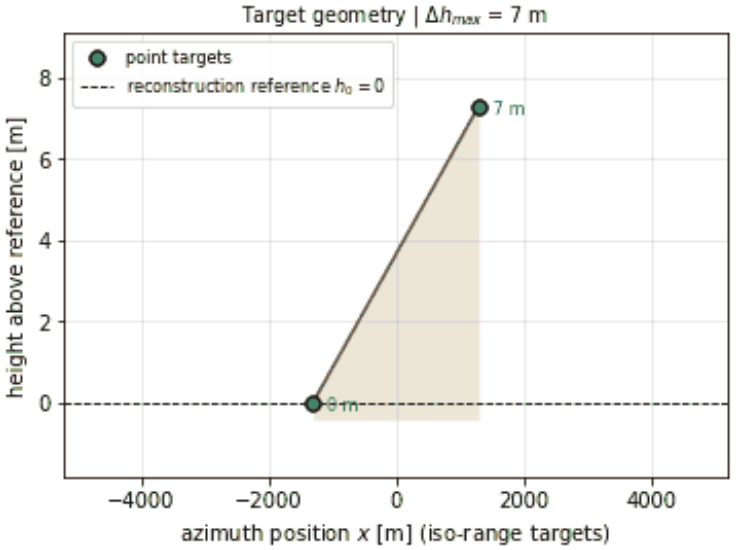



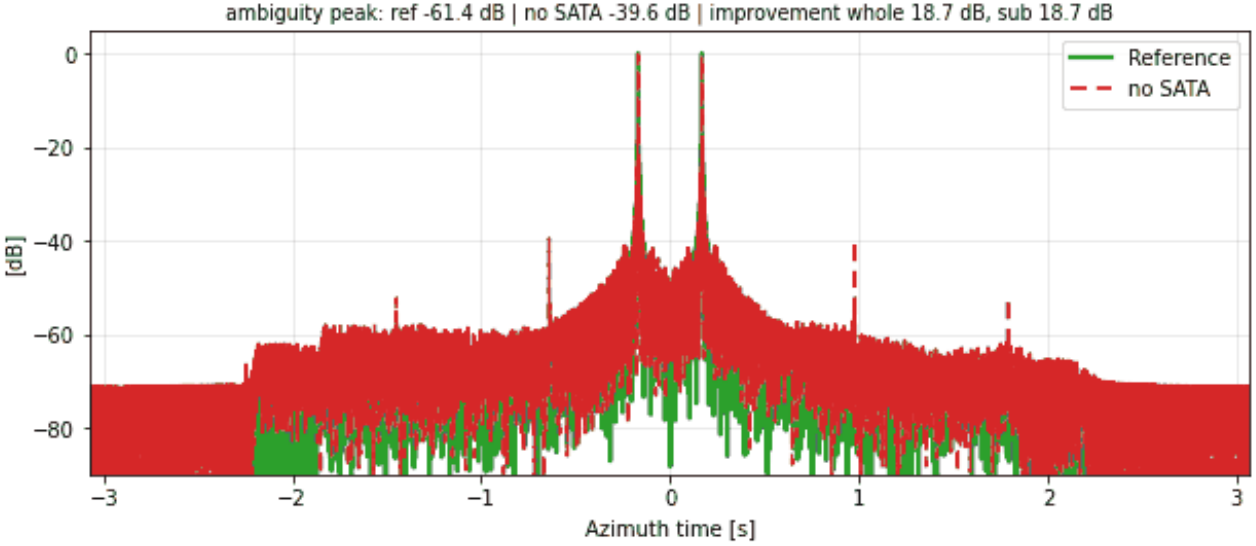



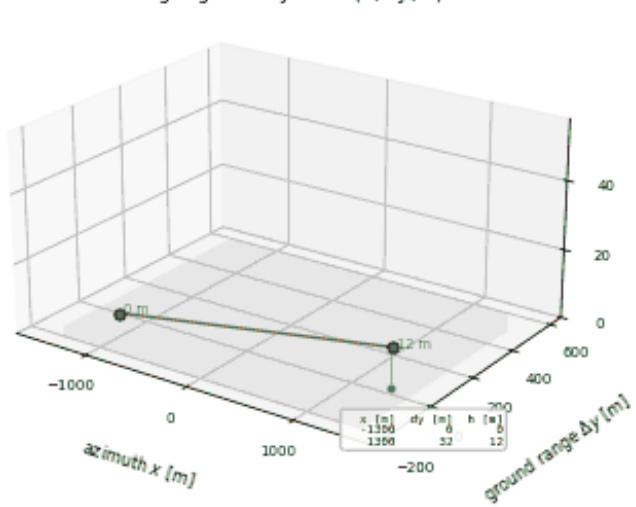



RA-NS-011 | SATA 1D | along-track ramp: N = 2, $\alpha = 30^\circ$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

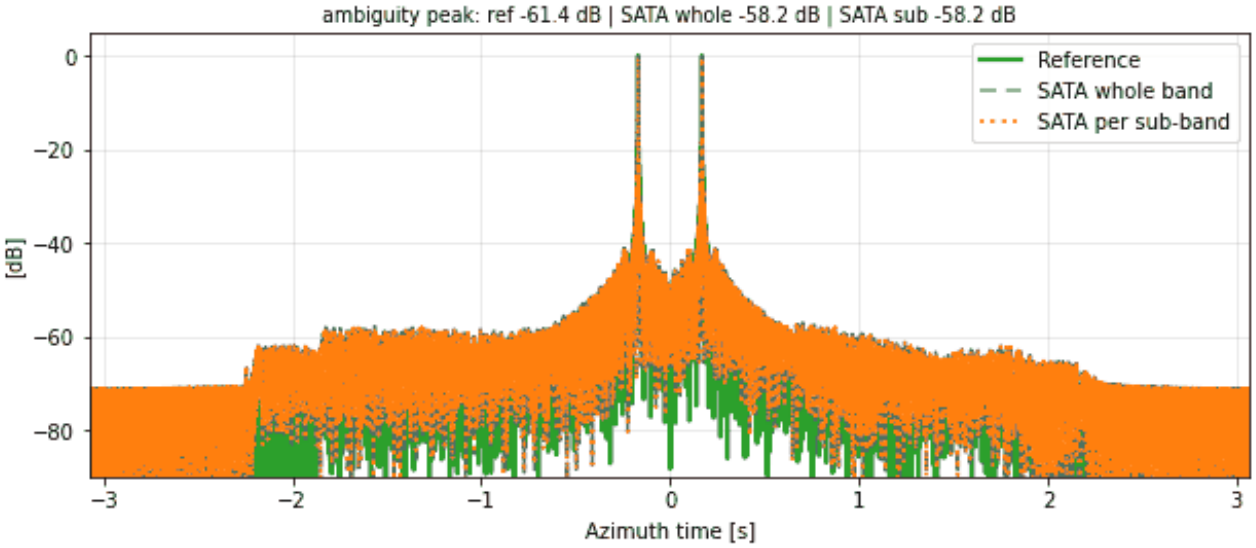


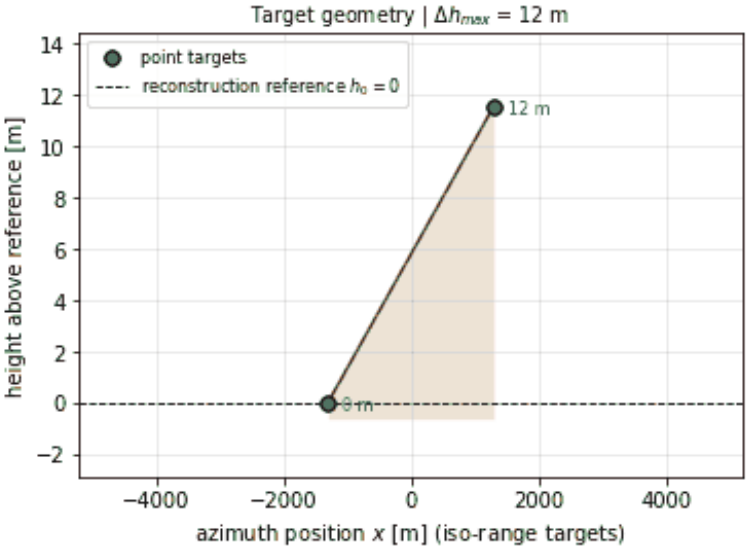



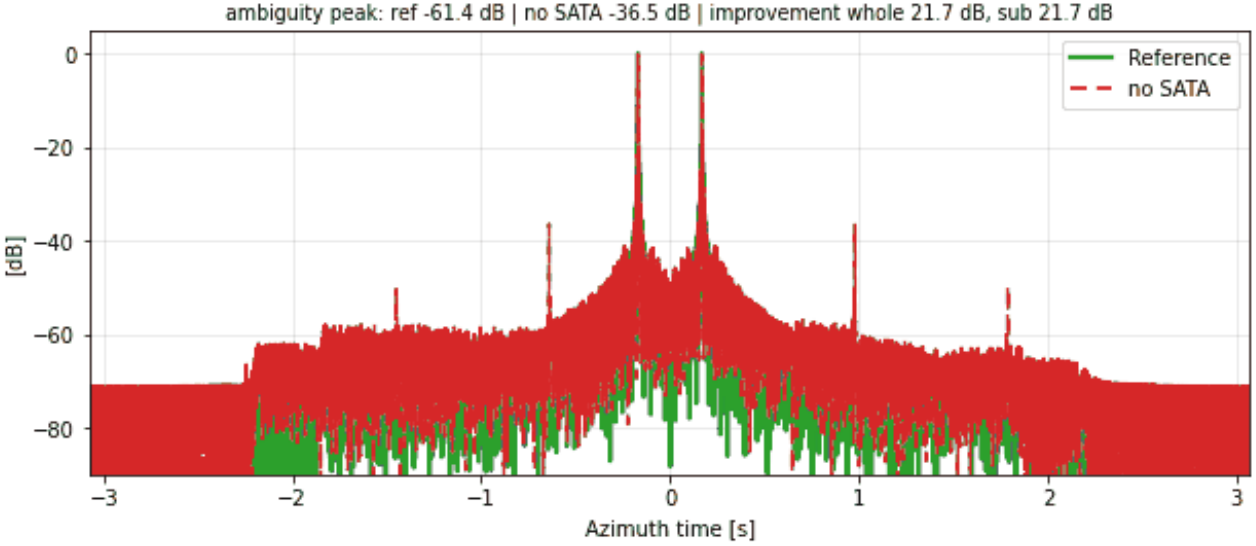



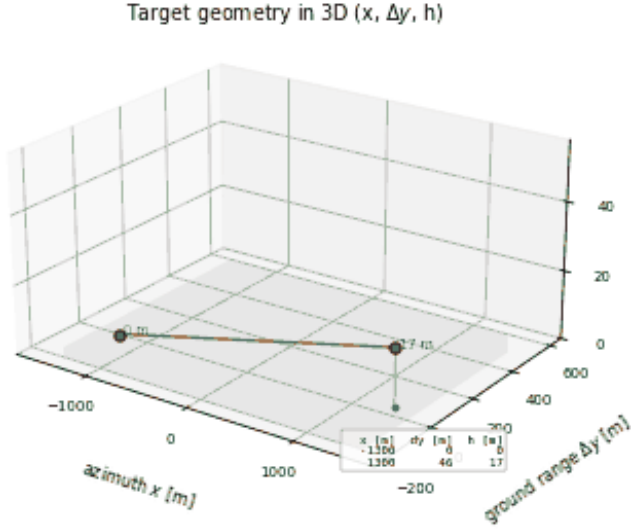



RA-NS-012 | SATA 1D | along-track ramp: N = 2, $\alpha = 40°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

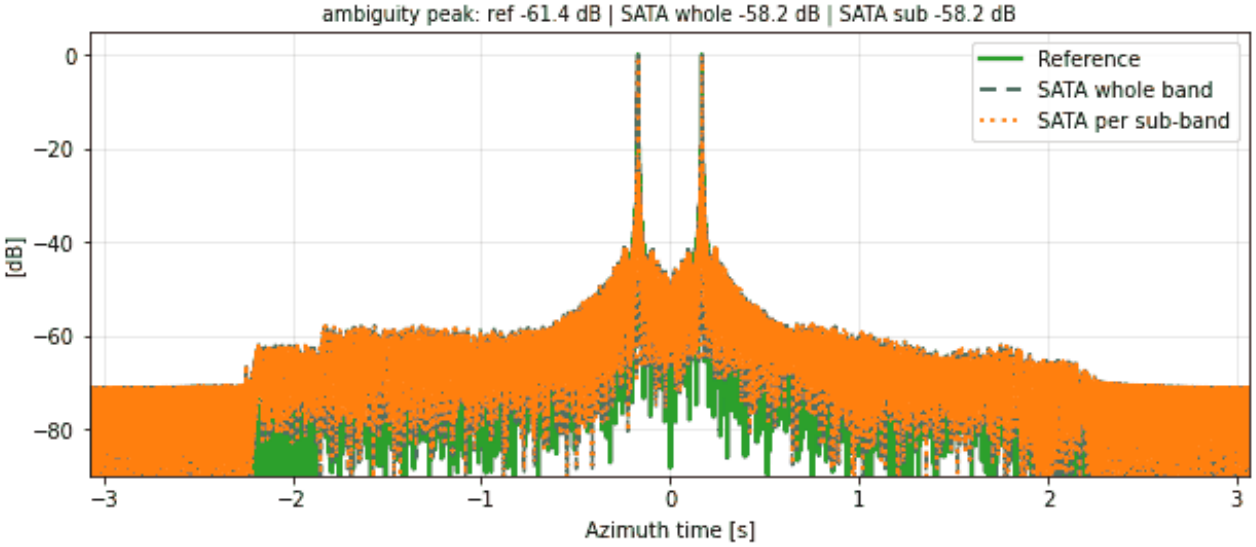

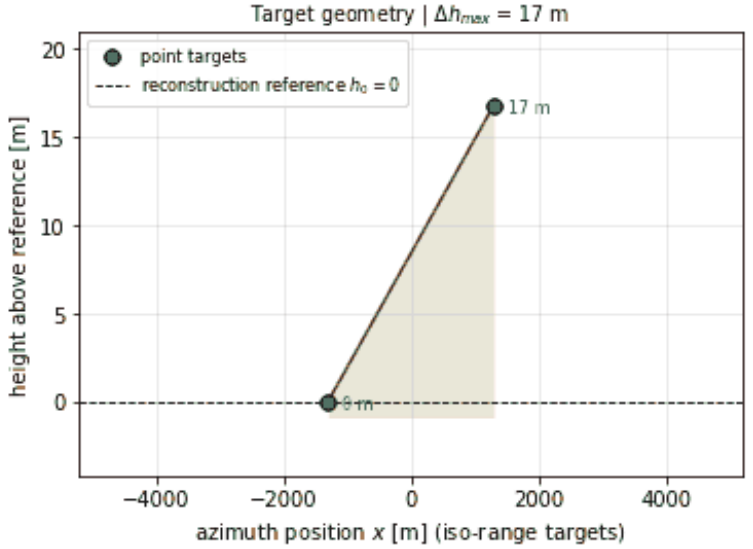



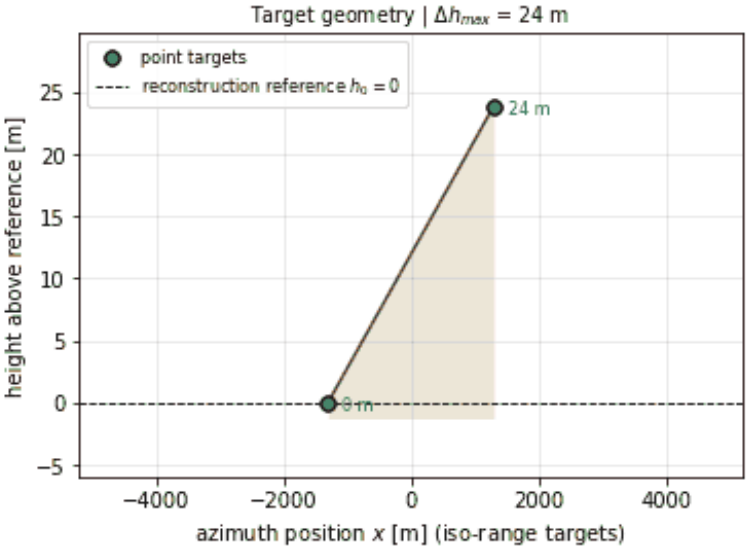



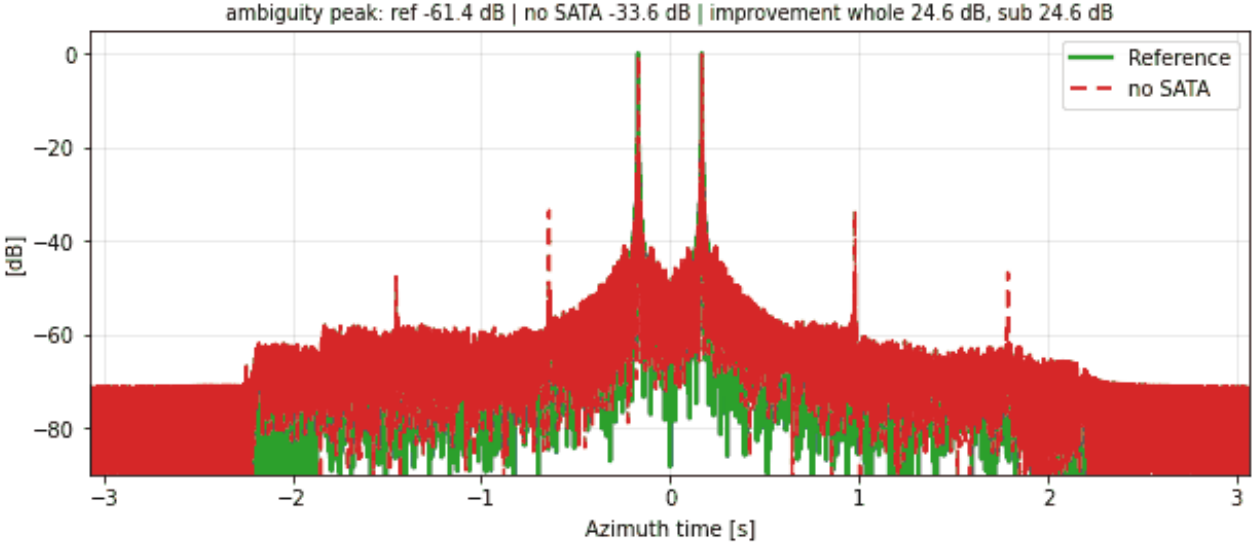



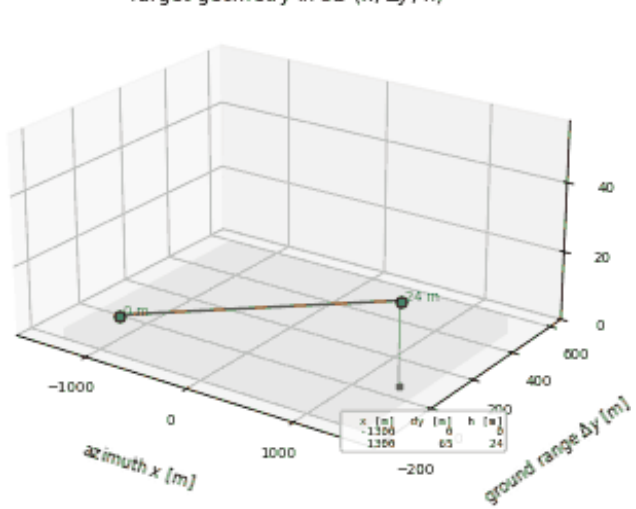
RA-NS-013 | SATA 1D | along-track ramp: N = 2, $\alpha = 50^\circ$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

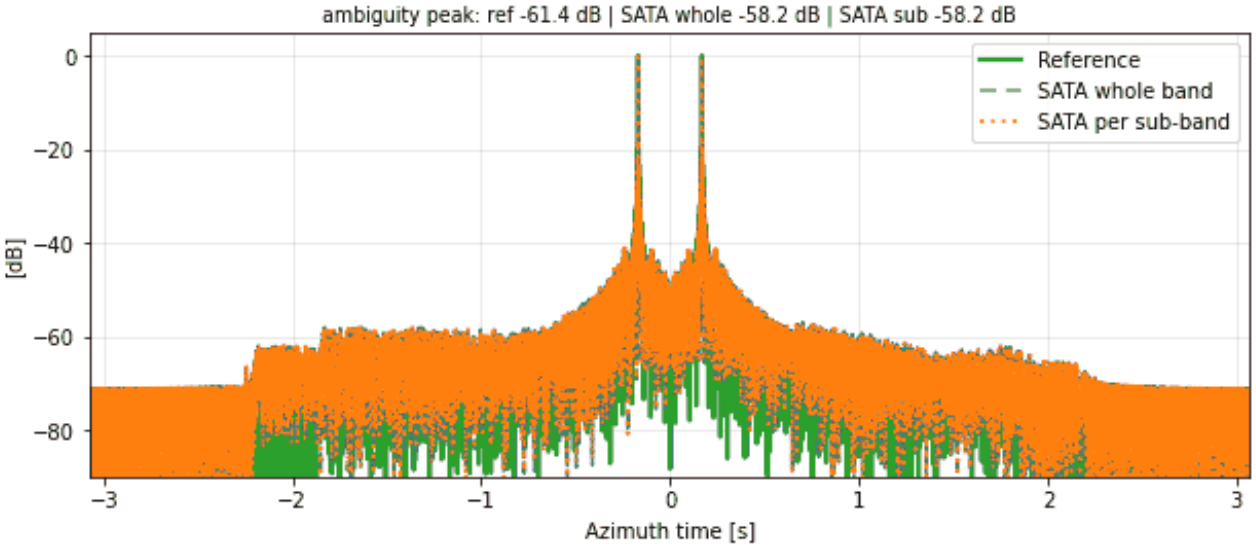






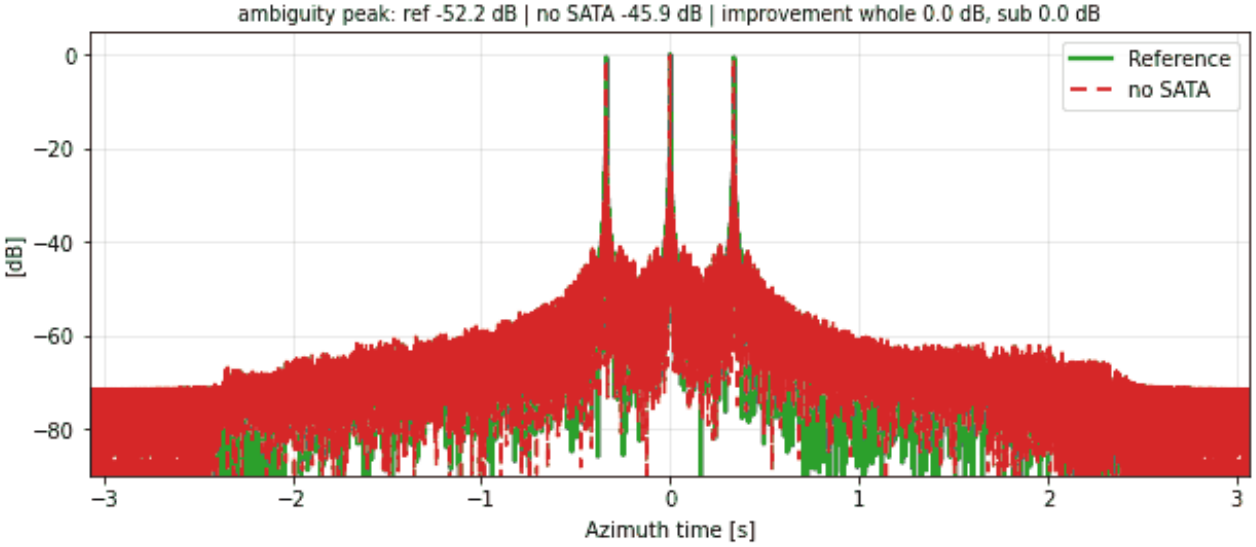



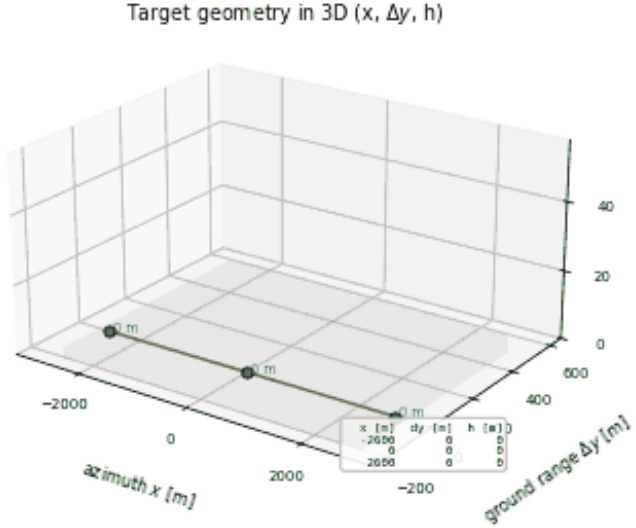



RA-NS-014 | SATA 1D | along-track ramp: N = 3, $\alpha = 0.1°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

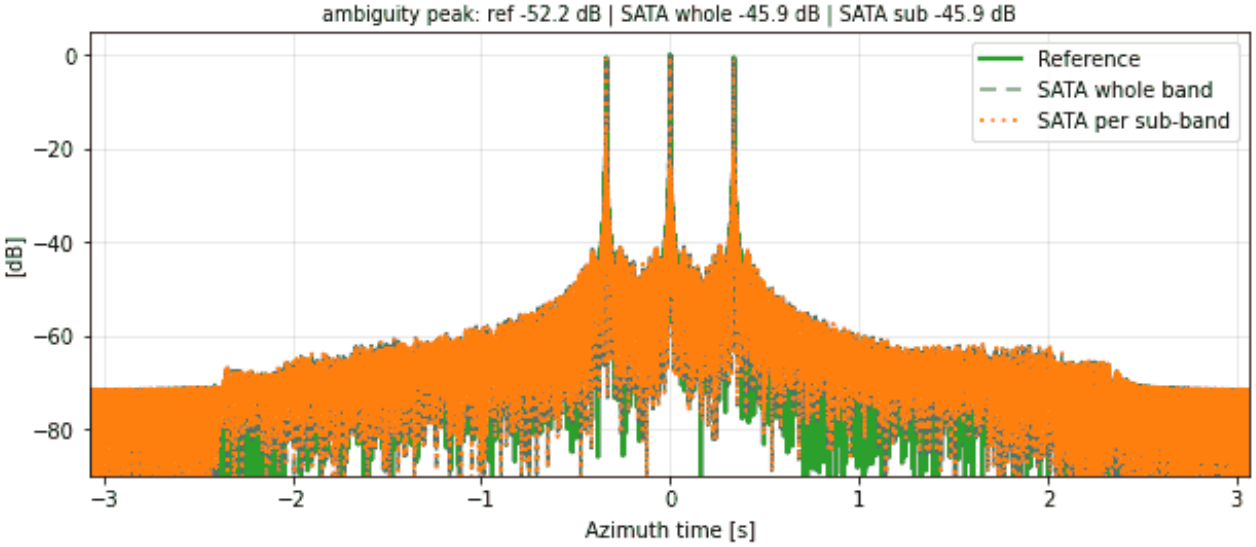


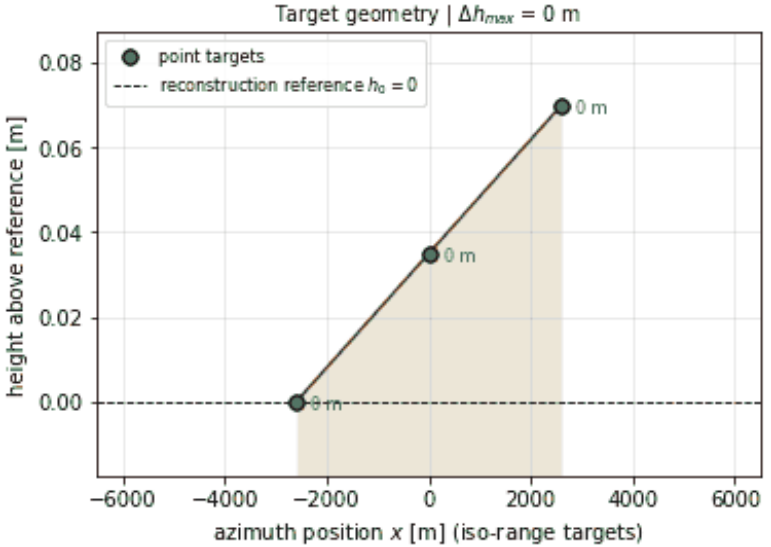



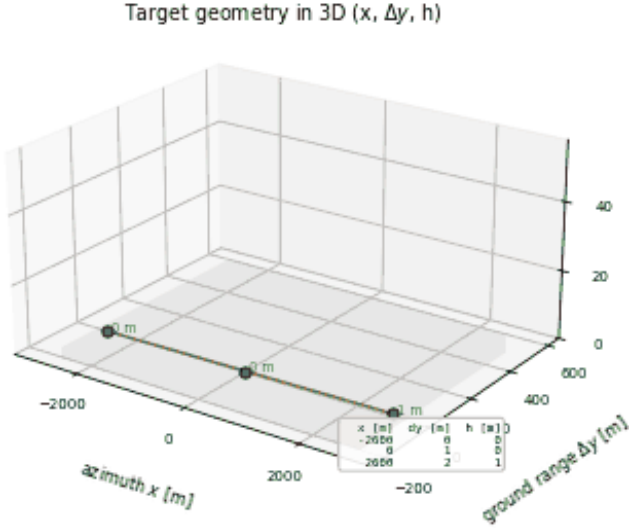
RA-NS-015 | SATA 1D | along-track ramp: N = 3, $\alpha = 1°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



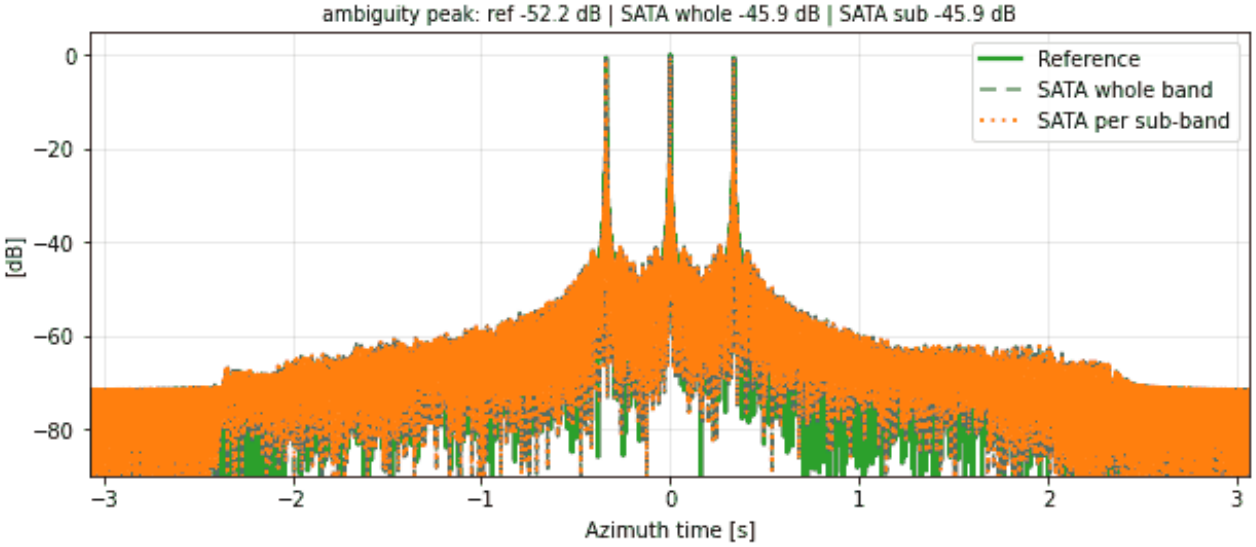



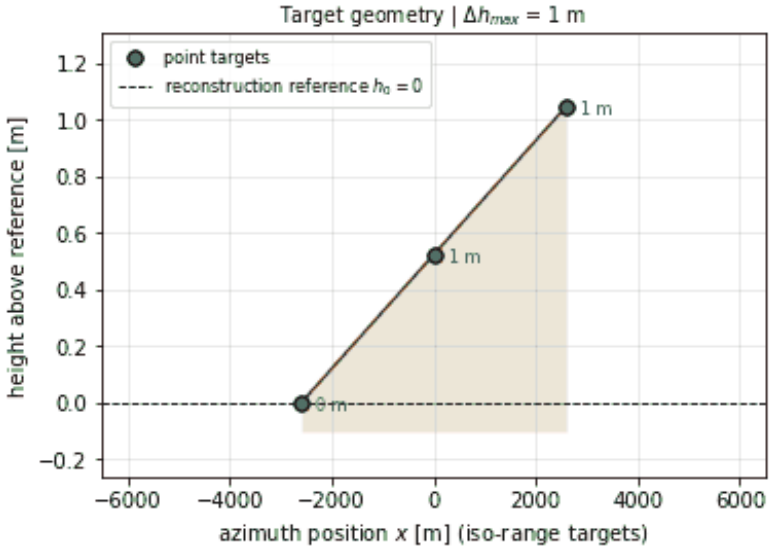


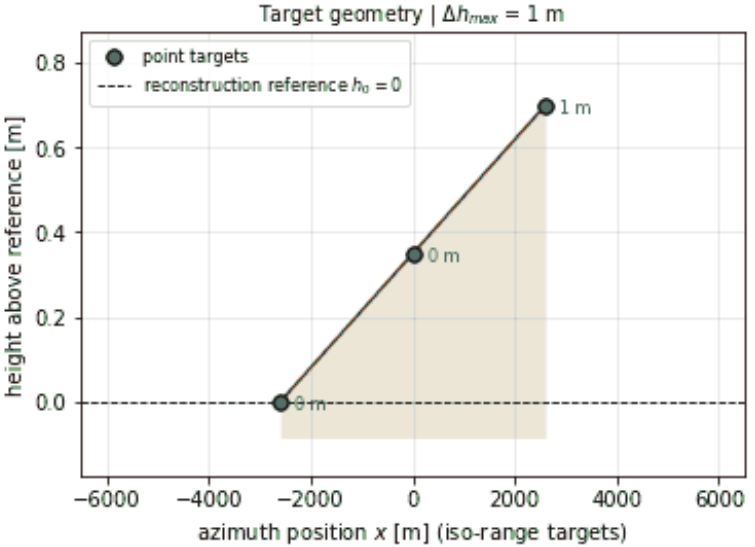




RA-NS-016 | SATA 1D | along-track ramp: N = 3, $\alpha = 1.5°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

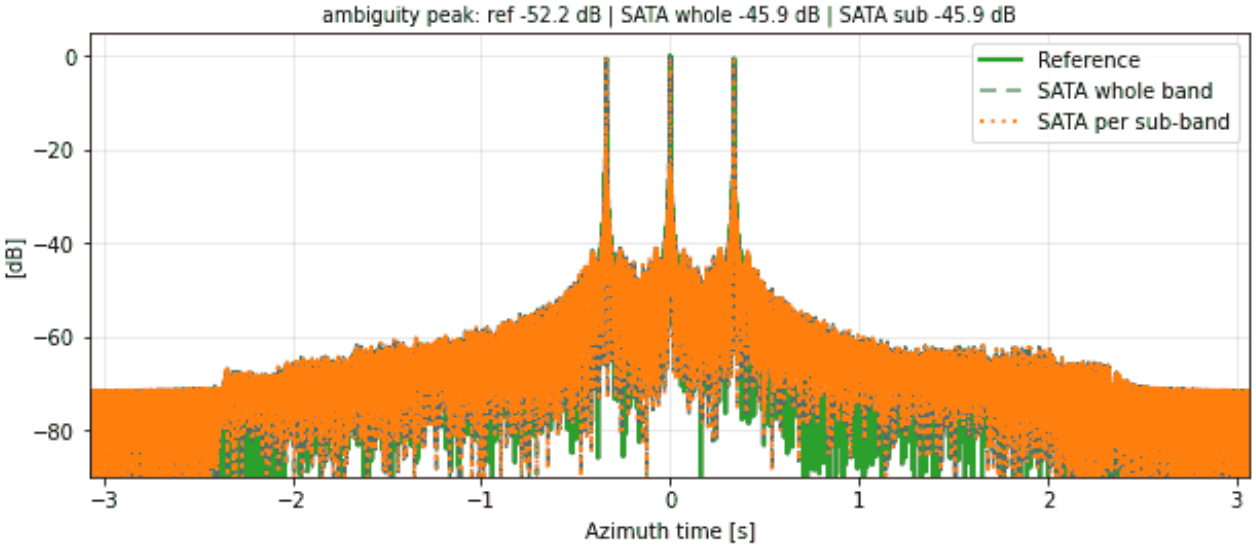





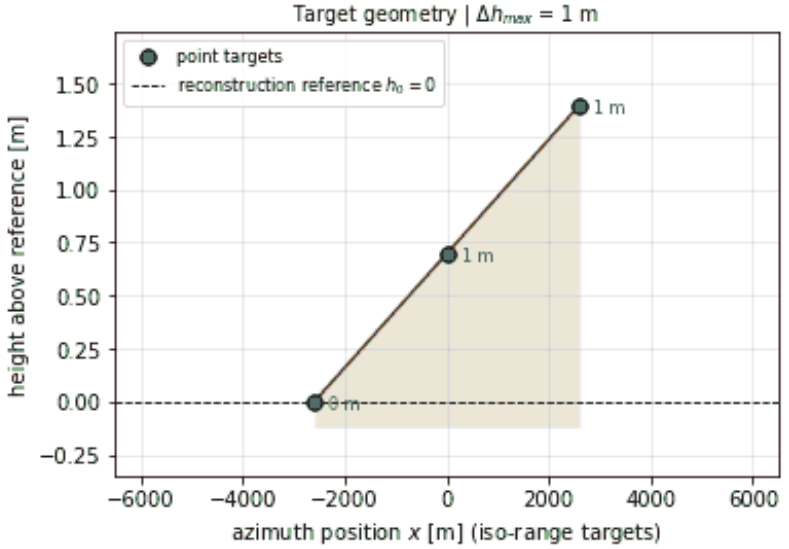





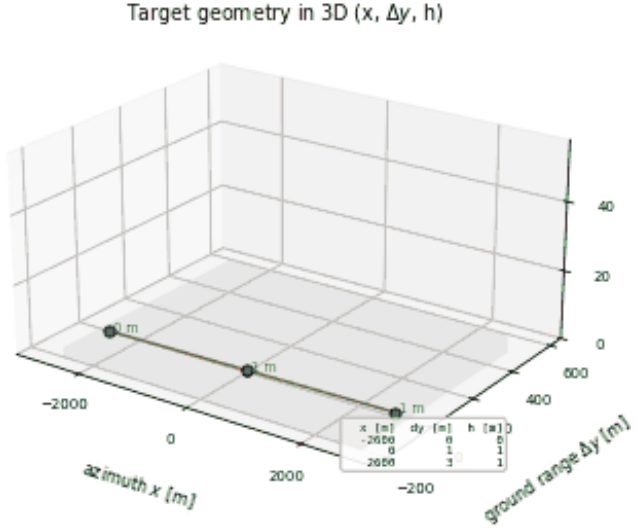


RA-NS-017 | SATA 1D | along-track ramp: N = 3, $\alpha = 2^\circ$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

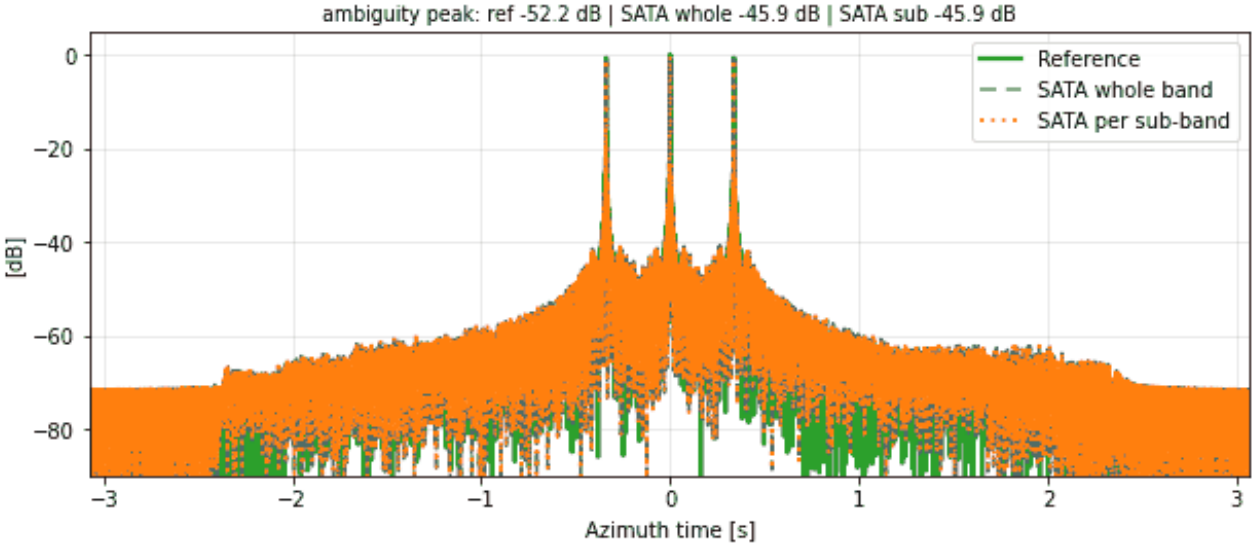


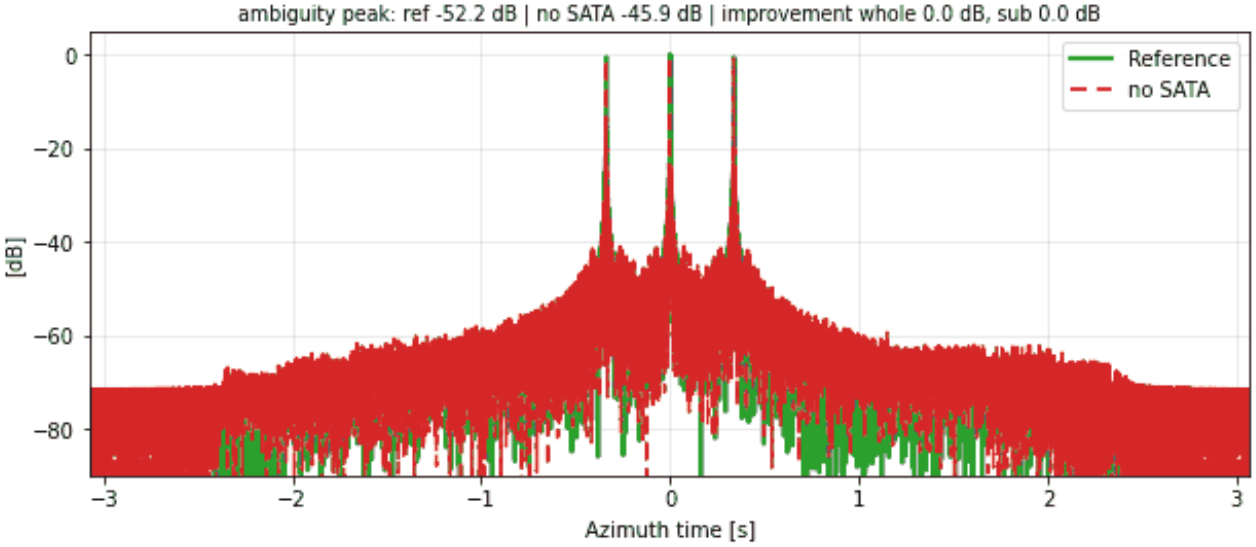



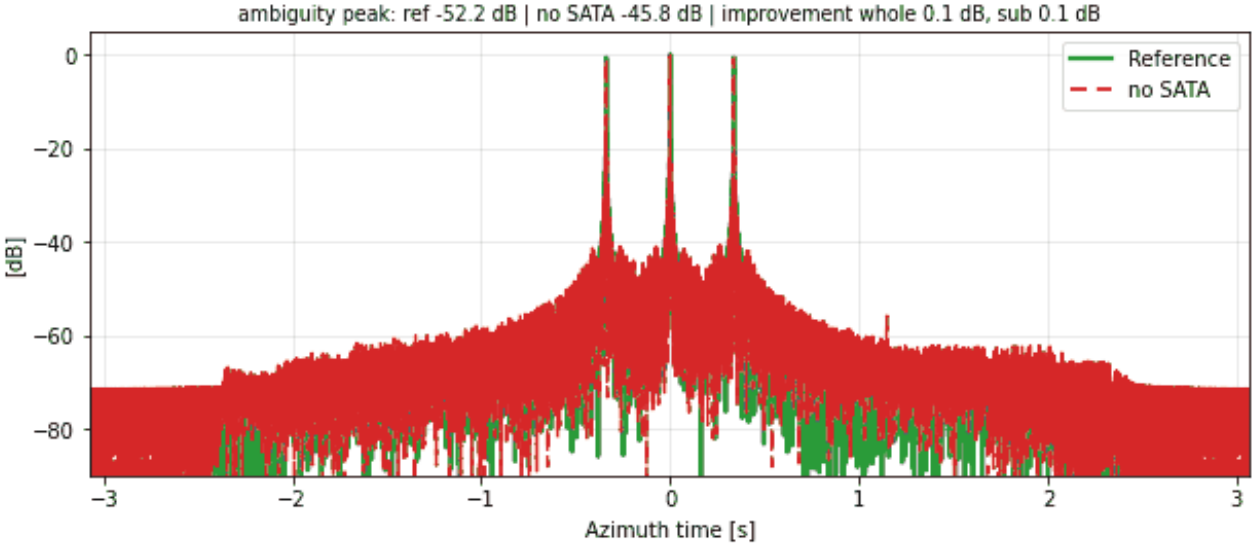


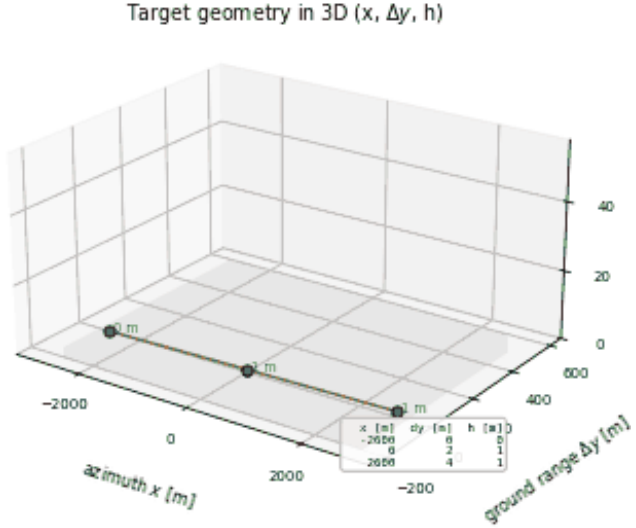
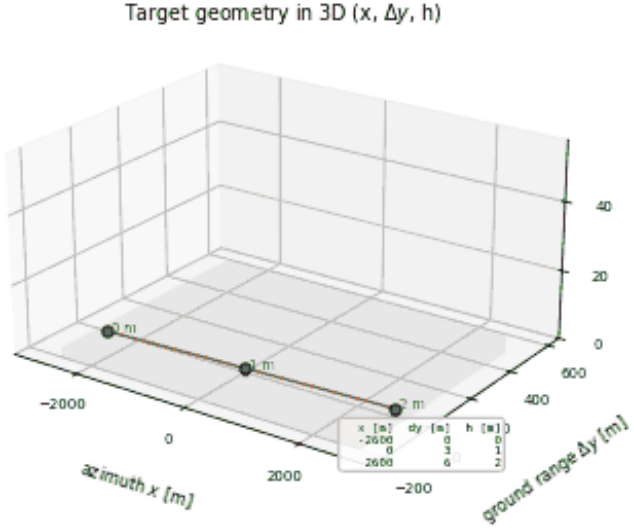



RA-NS-018 | SATA 1D | along-track ramp: N = 3, $\alpha = 3°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

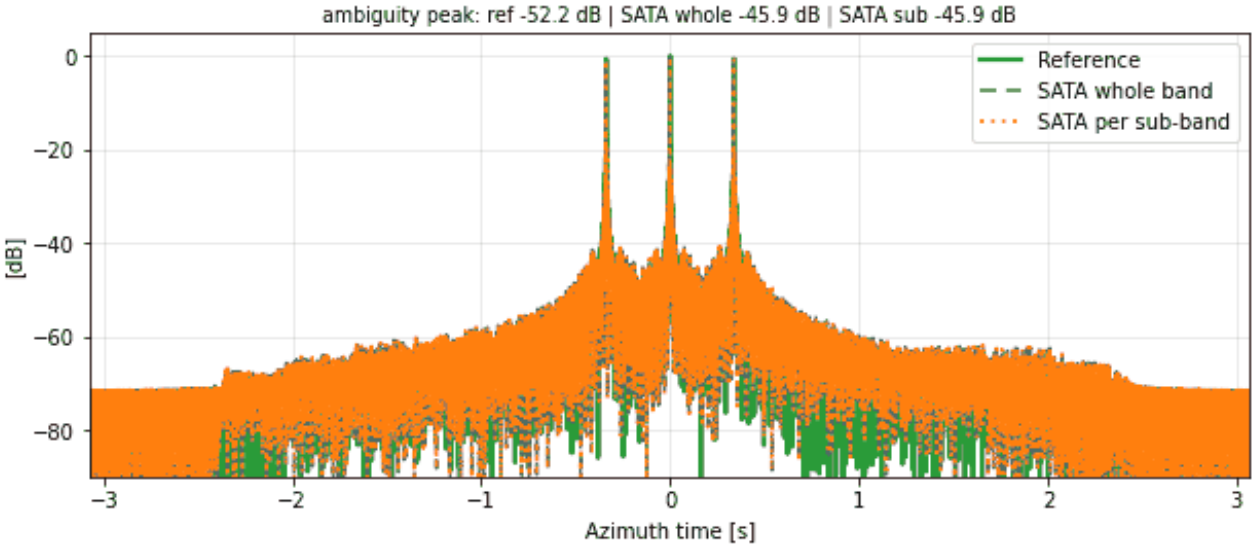


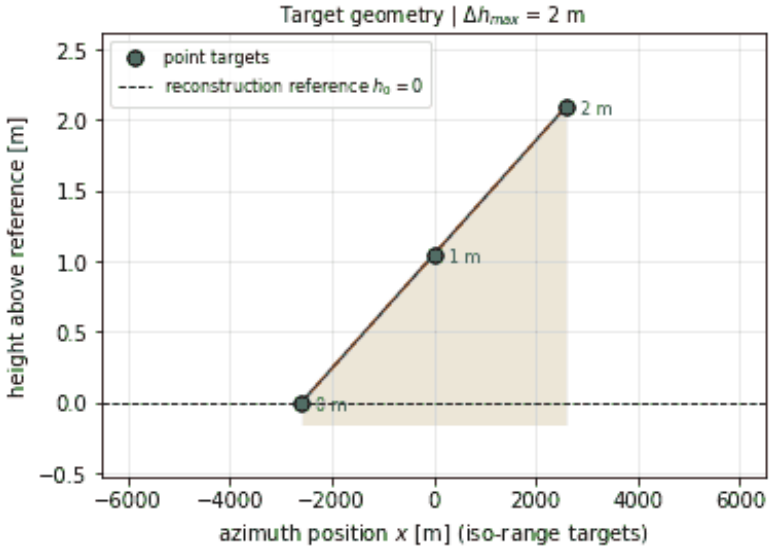



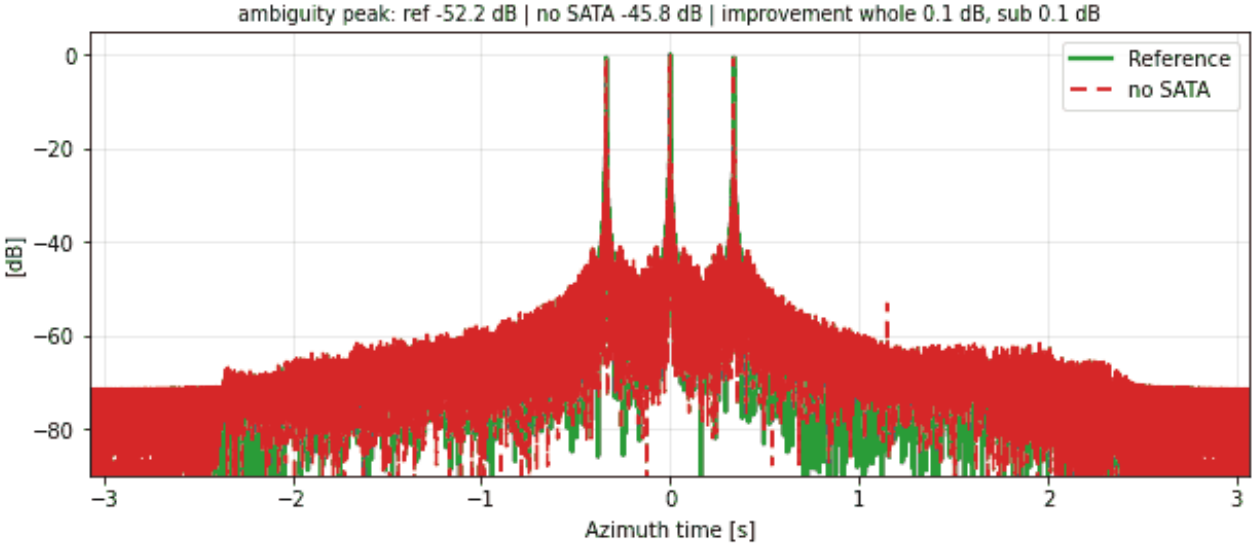



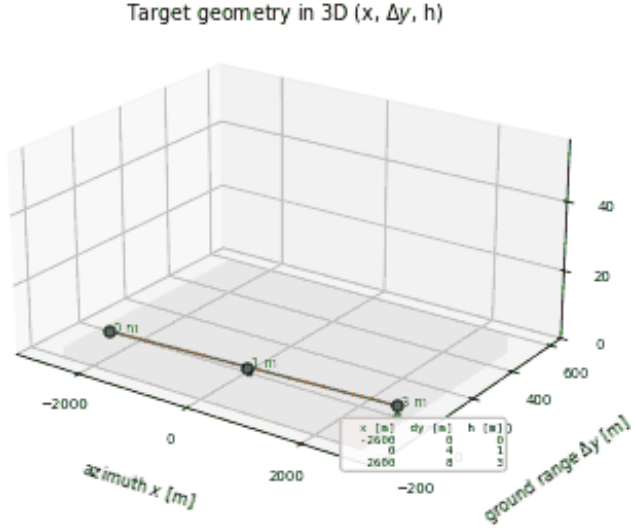



RA-NS-019 | SATA 1D | along-track ramp: N = 3, $\alpha = 4°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

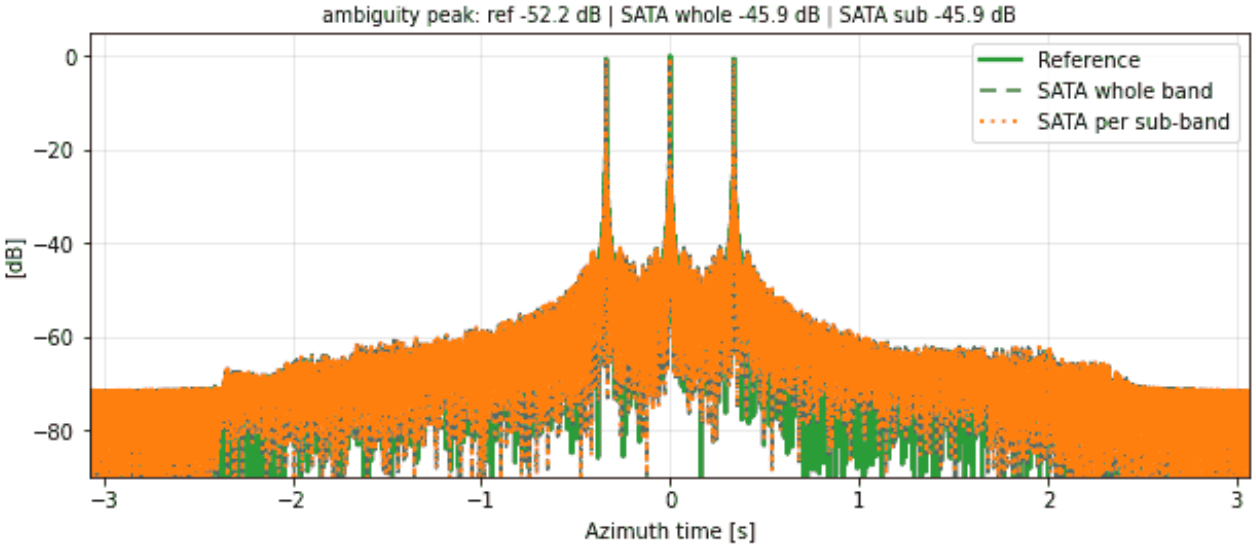


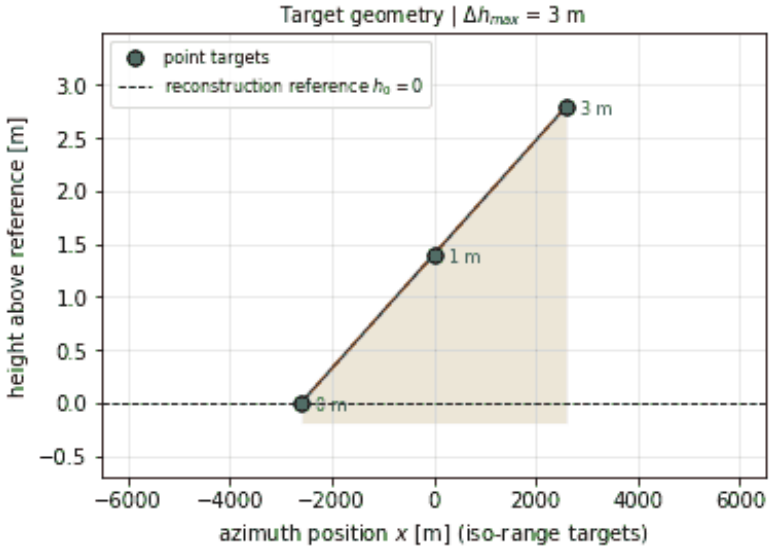



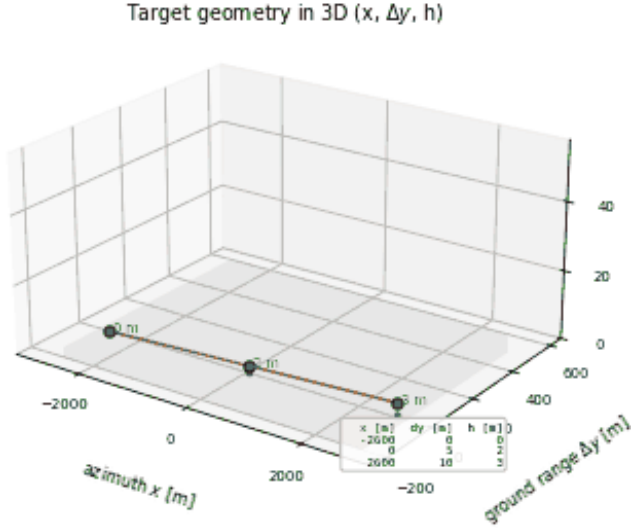
RA-NS-020 | SATA 1D | along-track ramp: N = 3, $\alpha = 5°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



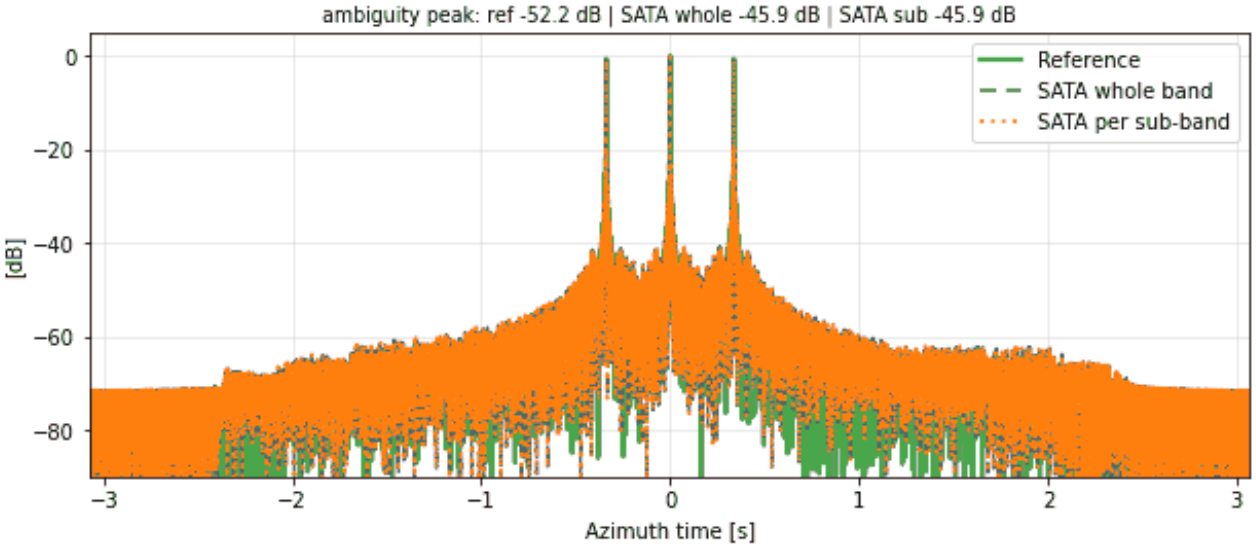



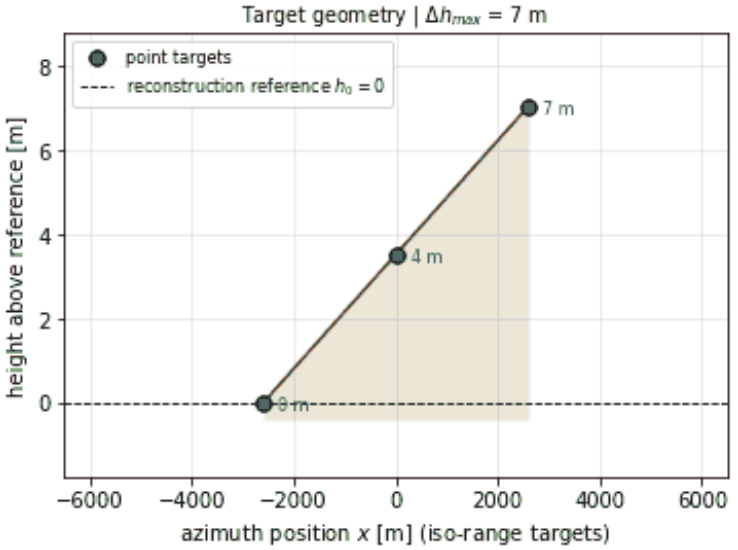


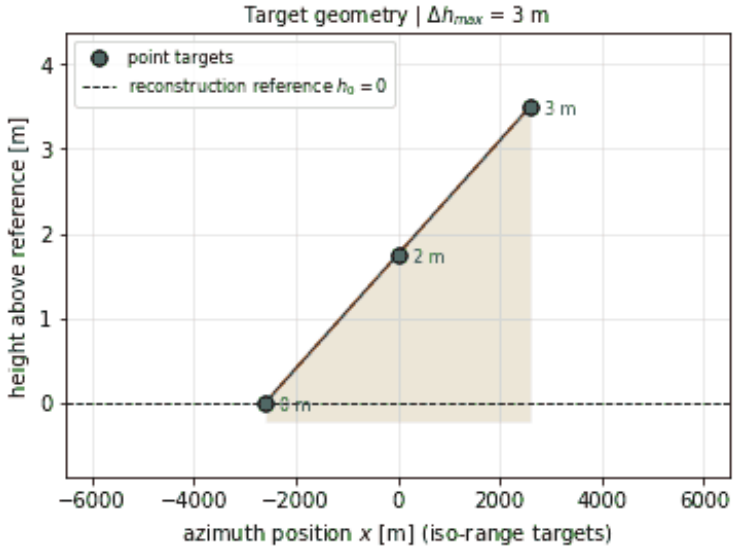




RA-NS-021 | SATA 1D | along-track ramp: N = 3, $\alpha = 10^\circ$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

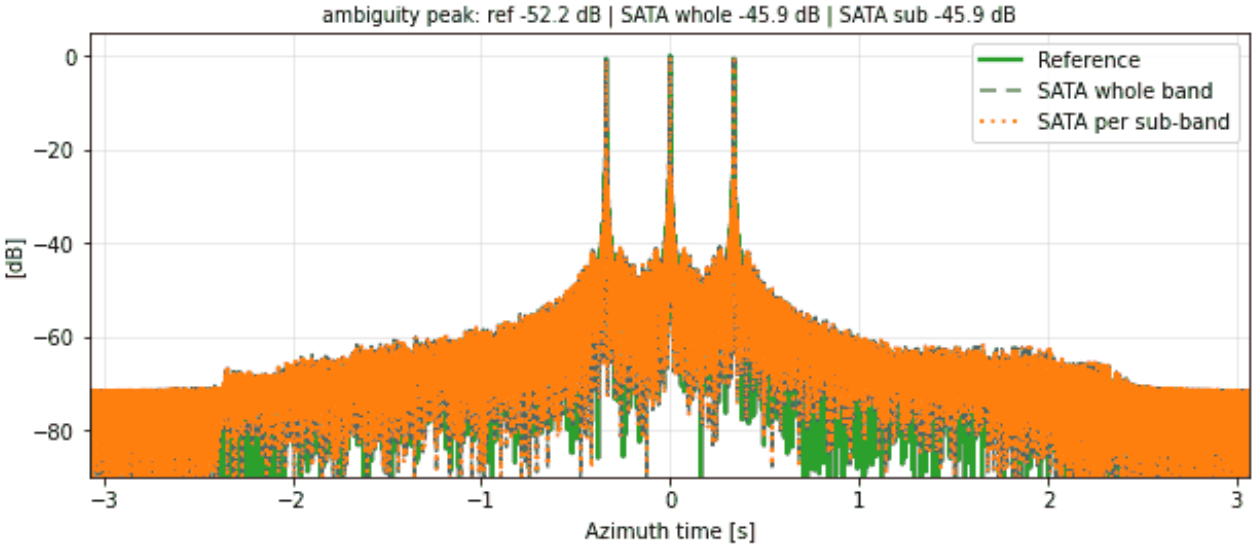





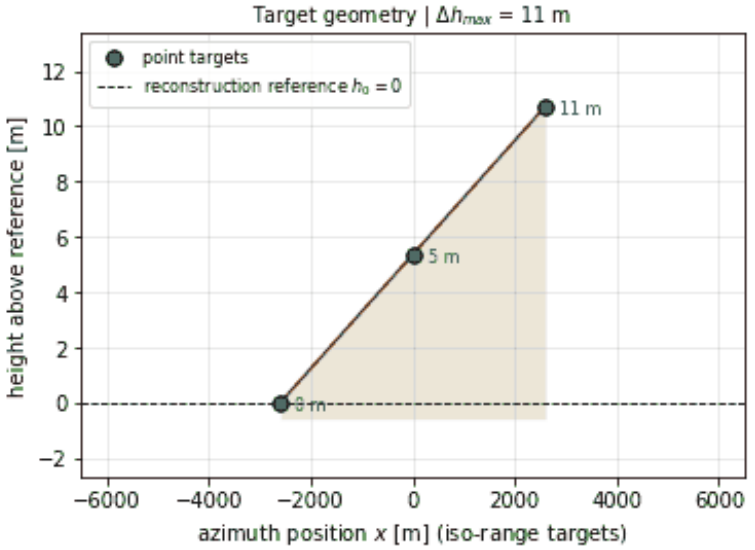





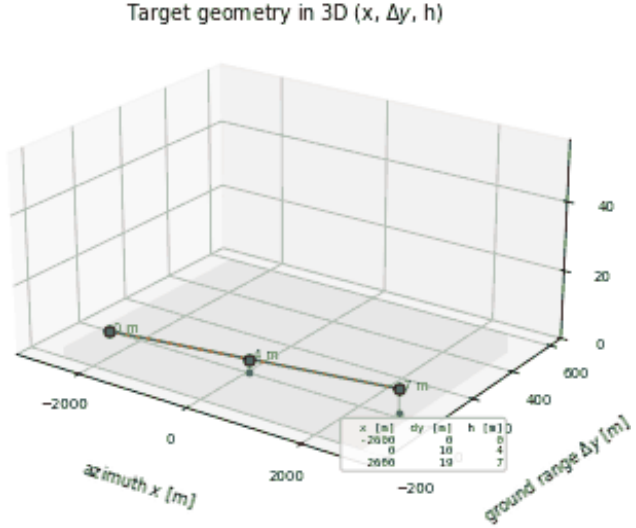


RA-NS-022 | SATA 1D | along-track ramp: N = 3, $\alpha = 15^\circ$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

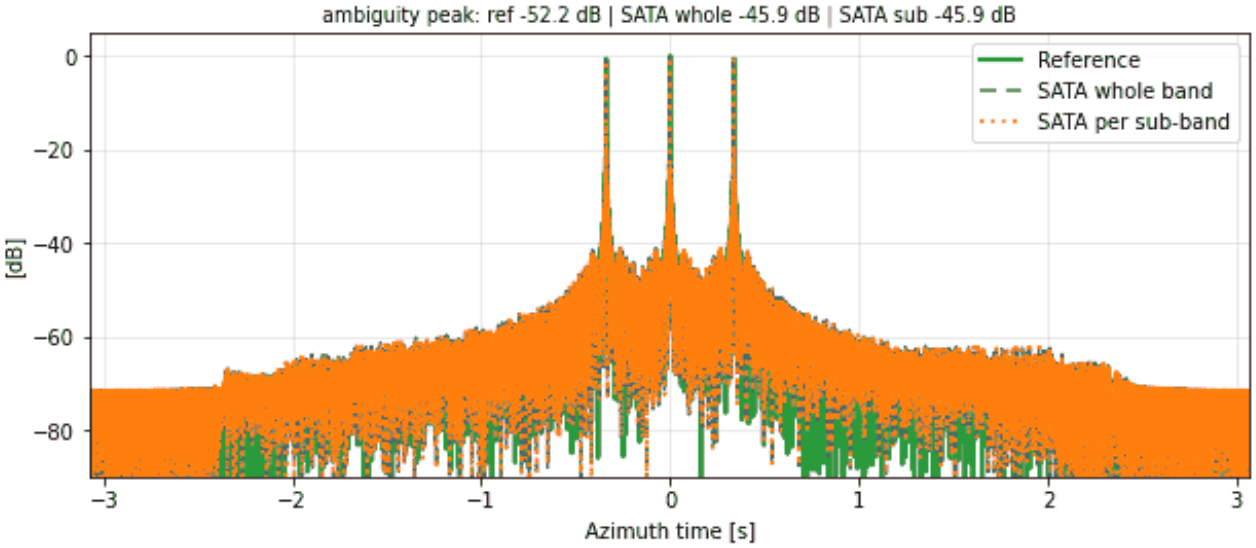


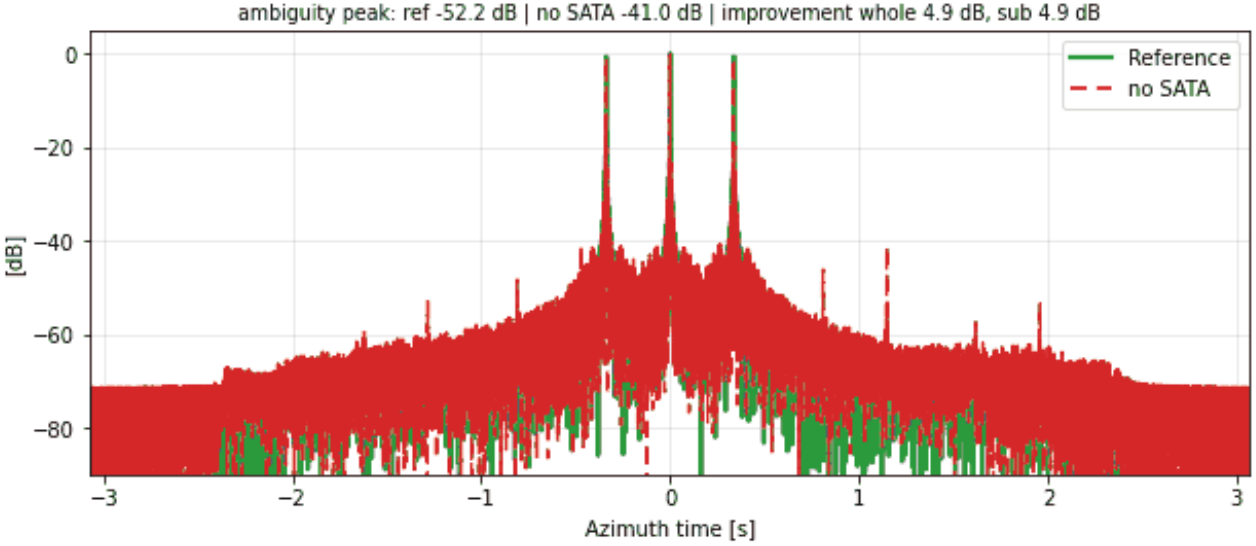



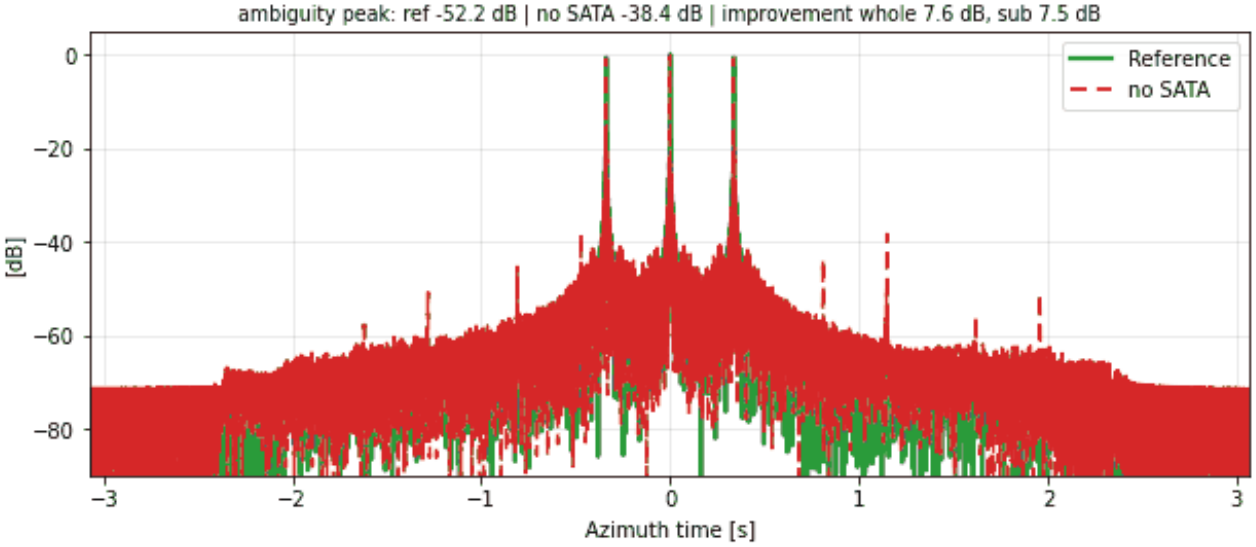


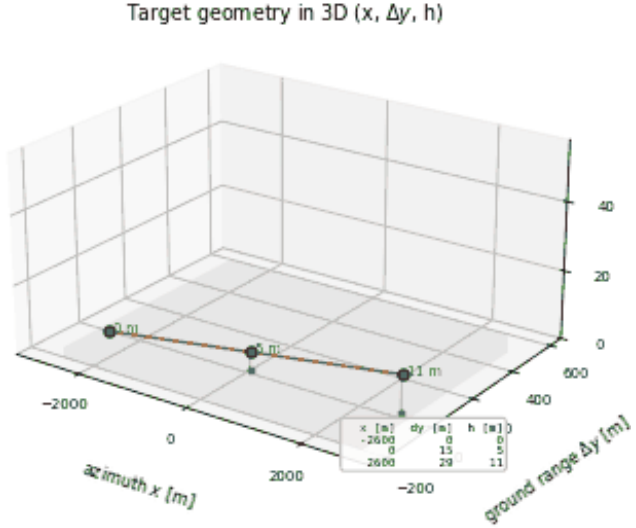
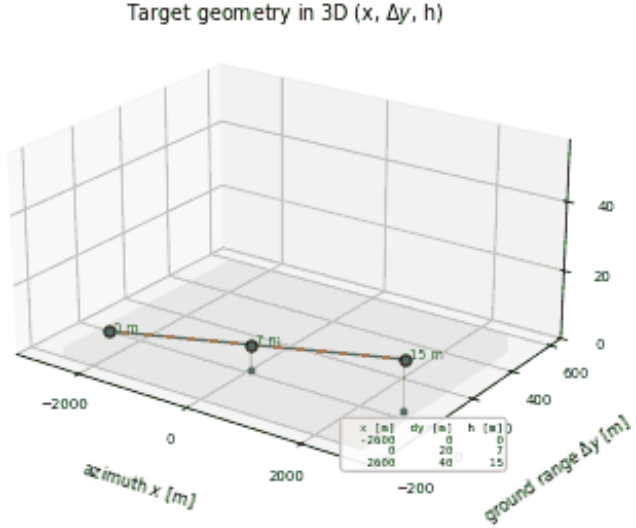



RA-NS-023 | SATA 1D | along-track ramp: N = 3, $\alpha = 20°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

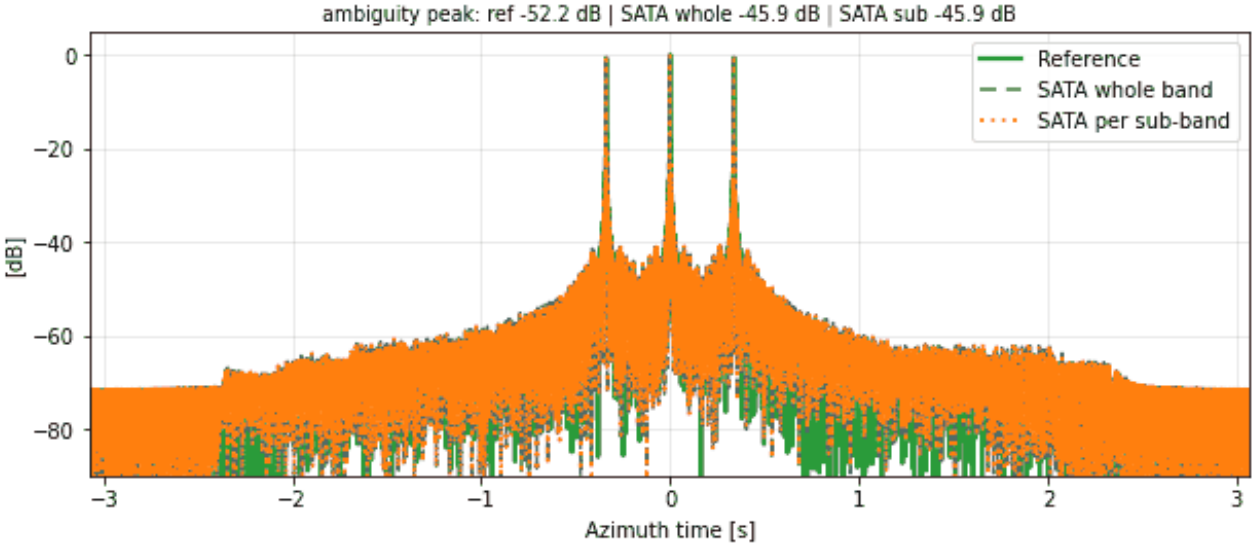


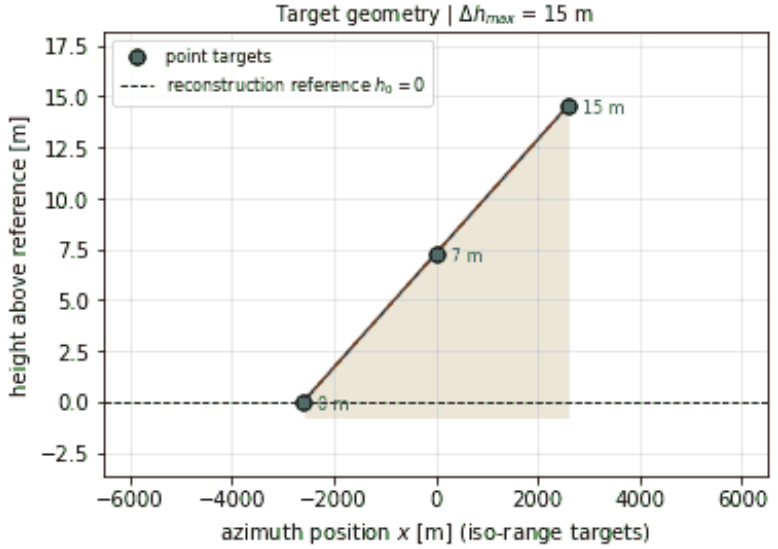



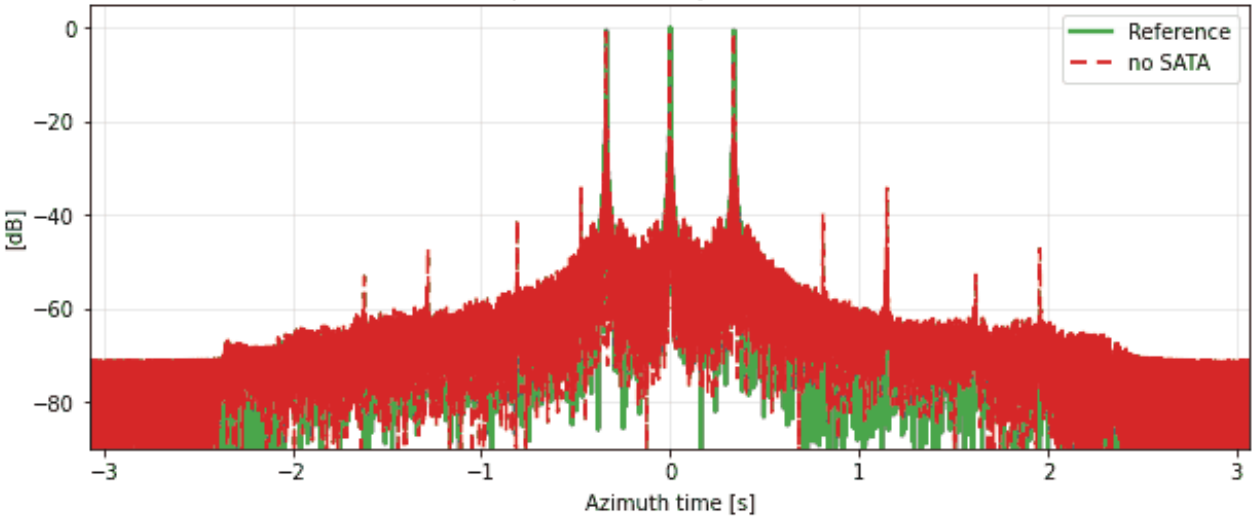



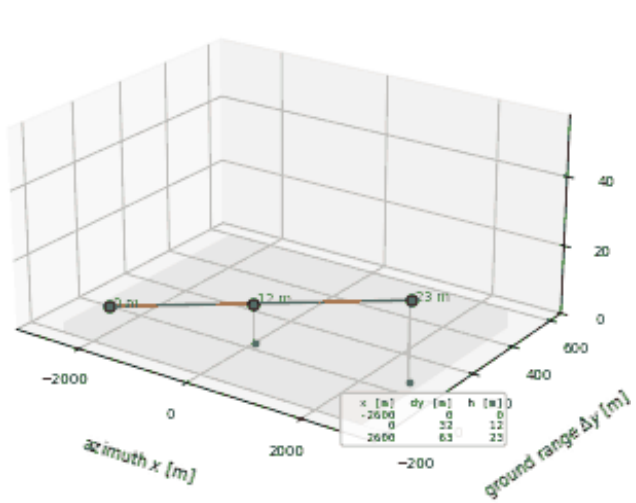



RA-NS-024 | SATA 1D | along-track ramp: N = 3, $\alpha = 30°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

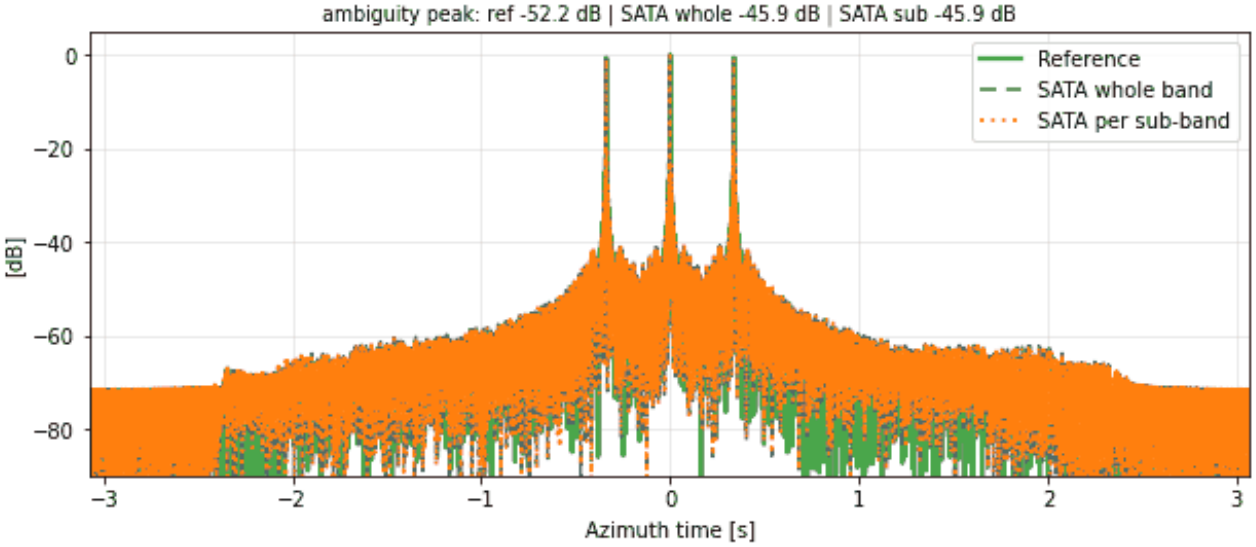


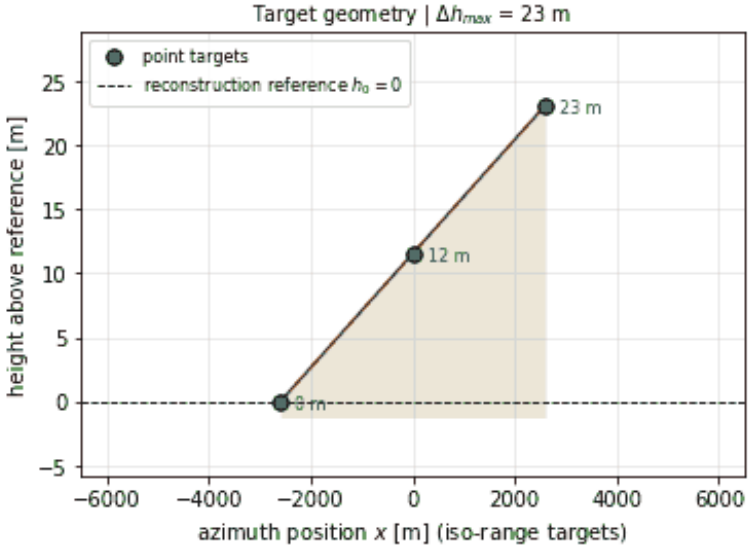



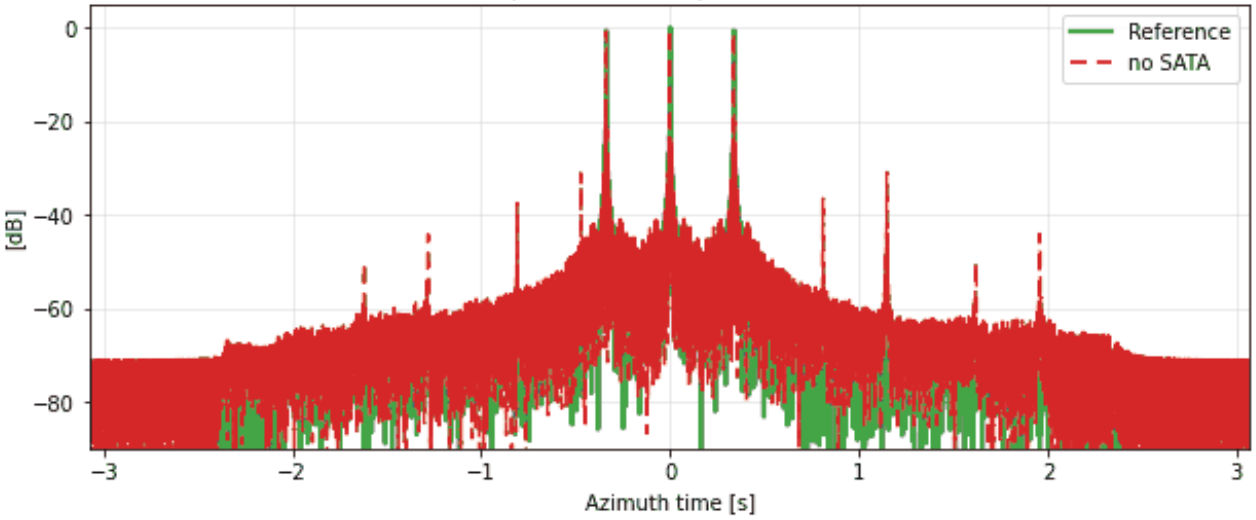



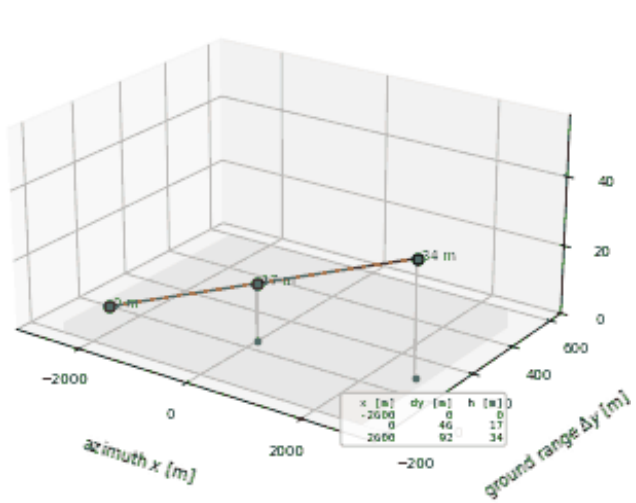



RA-NS-025 | SATA 1D | along-track ramp: N = 3, $\alpha = 40°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

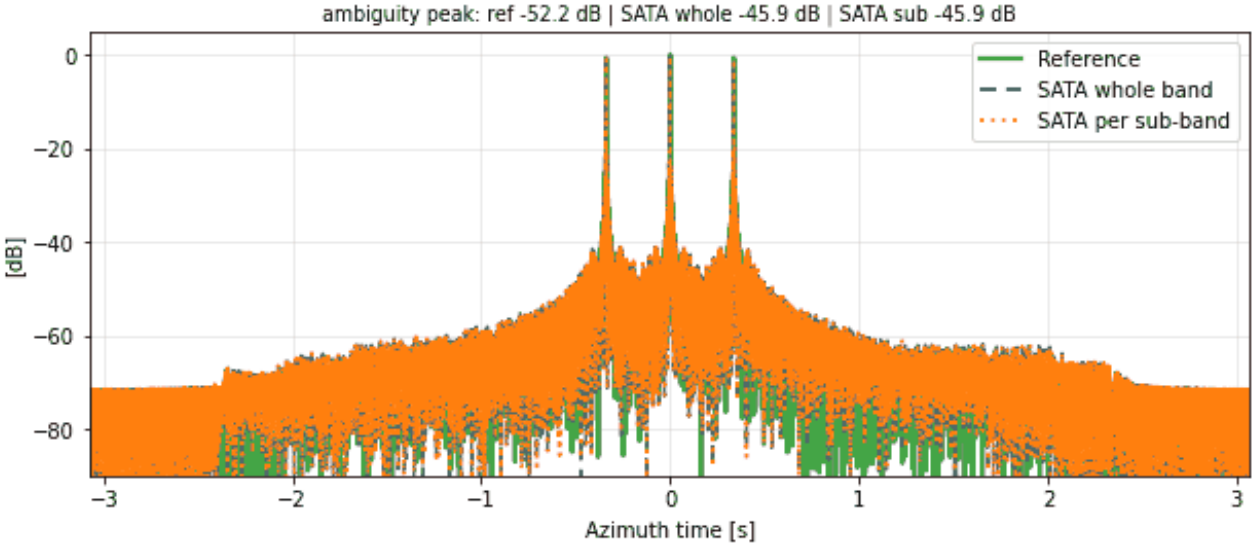


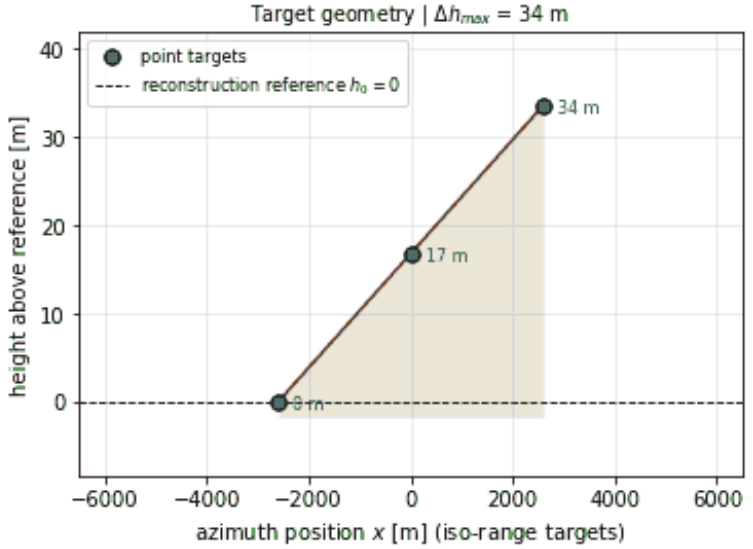



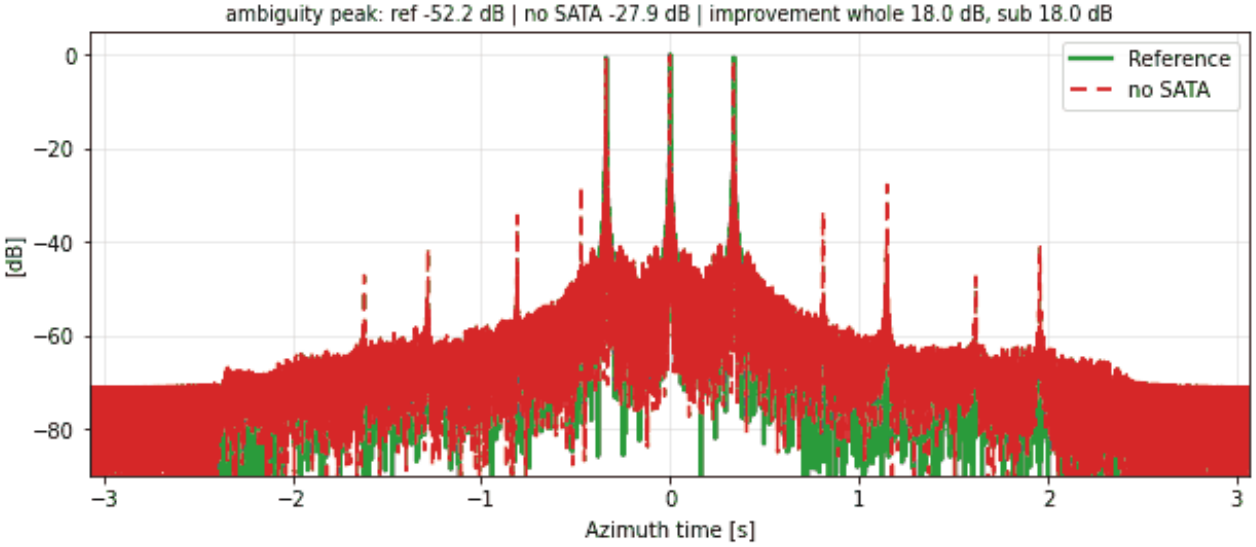



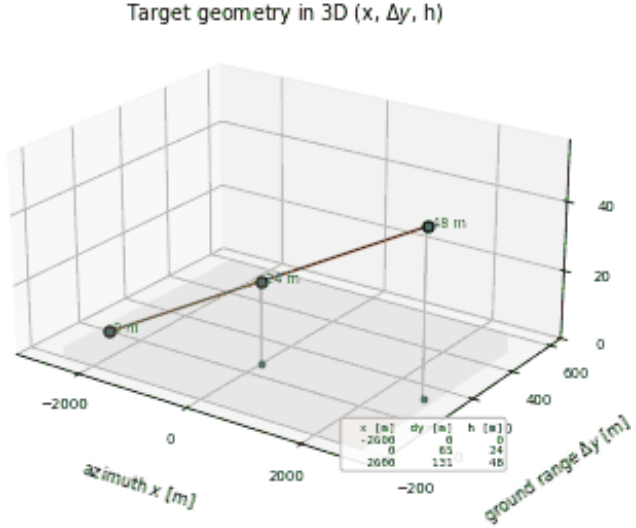



RA-NS-026 | SATA 1D | along-track ramp: N = 3, $\alpha = 50°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

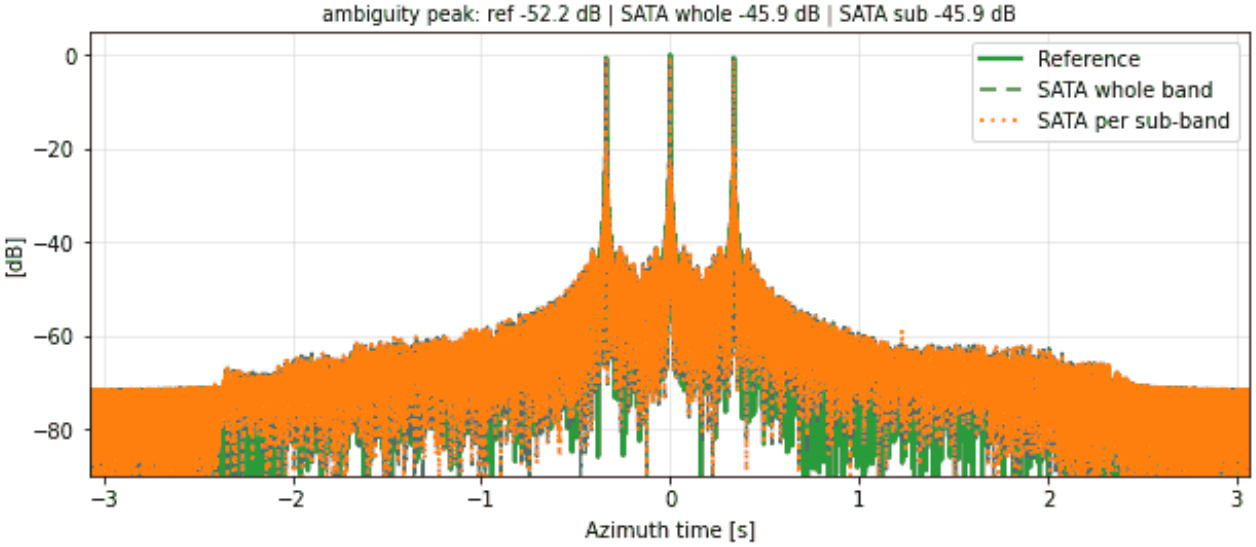


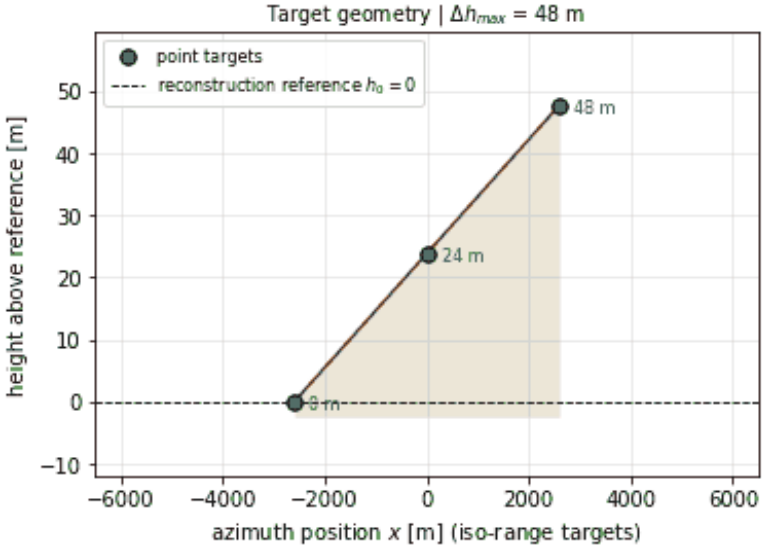



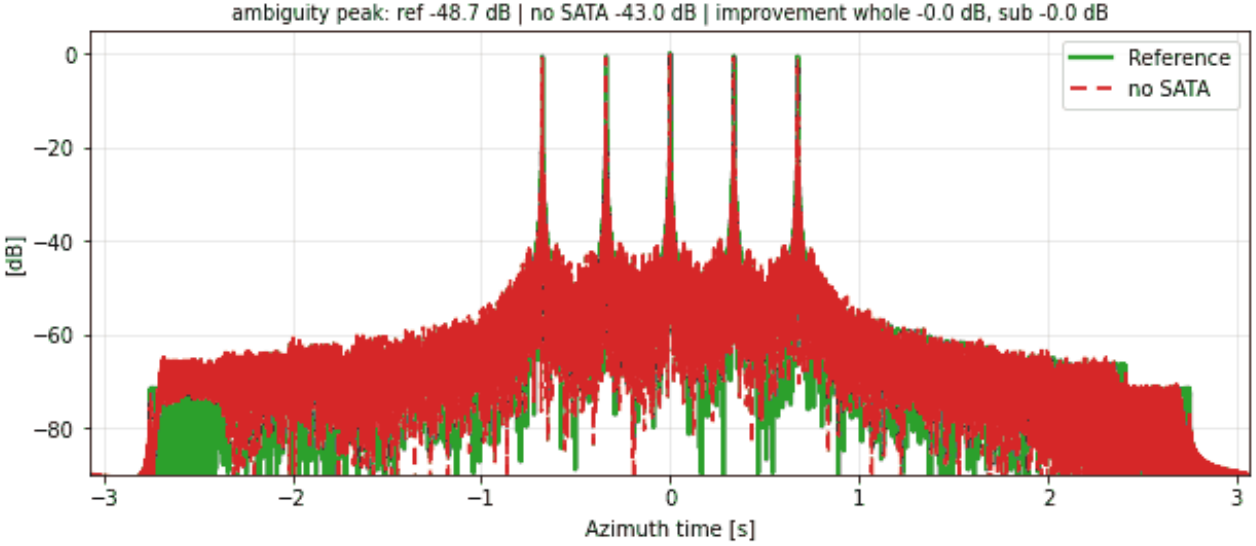



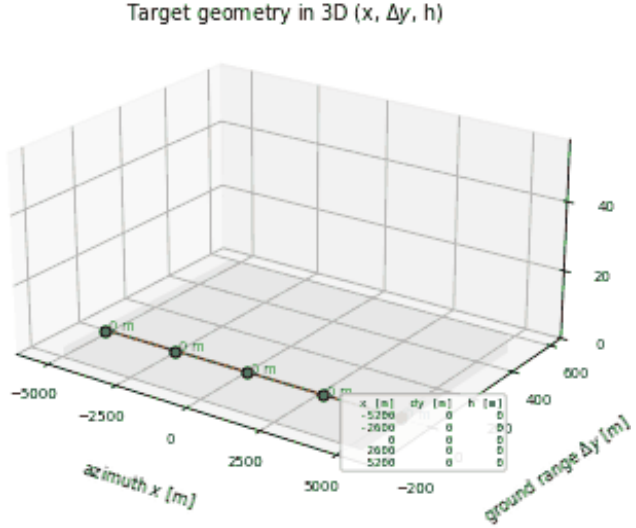



RA-NS-027 | SATA 1D | along-track ramp: N = 5, $\alpha = 0.1^\circ$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

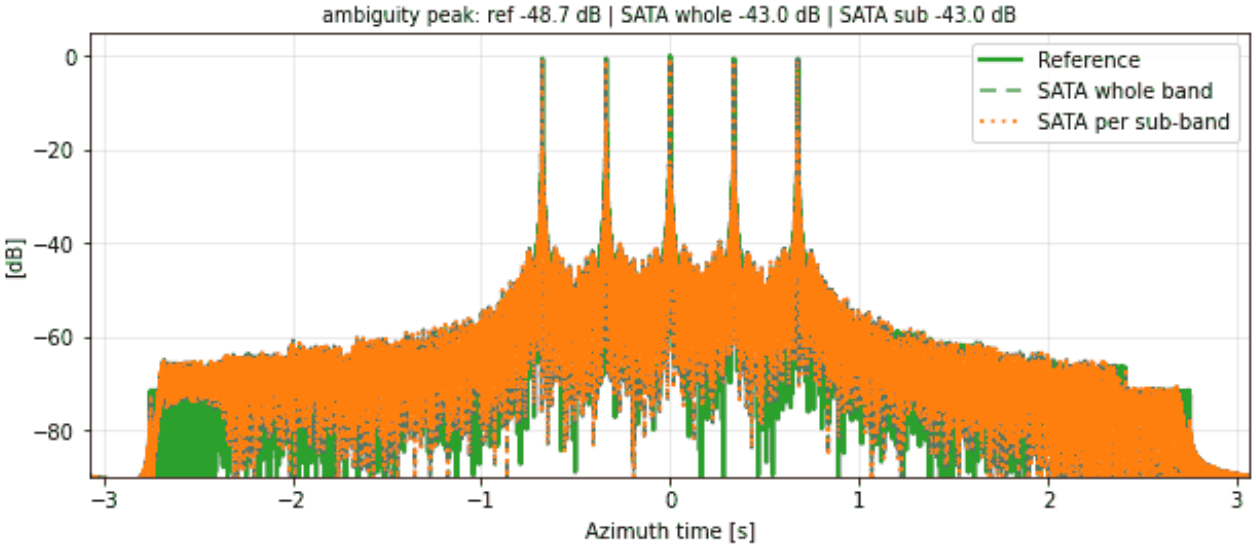


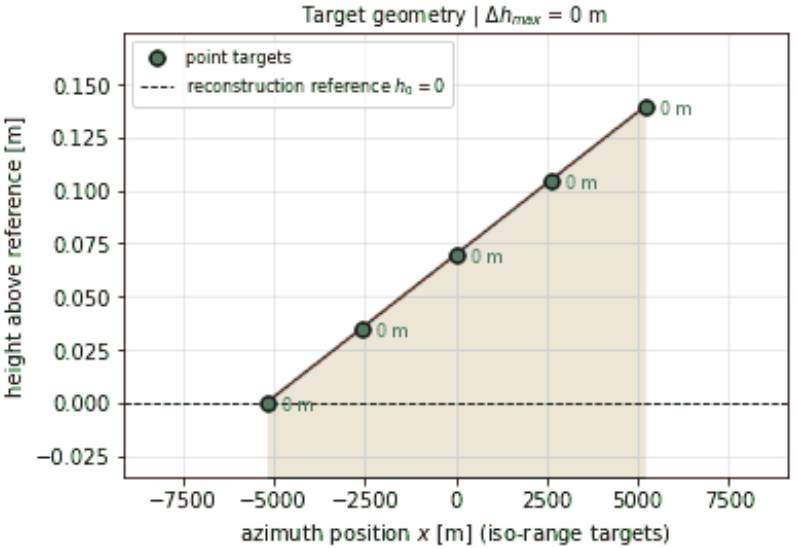



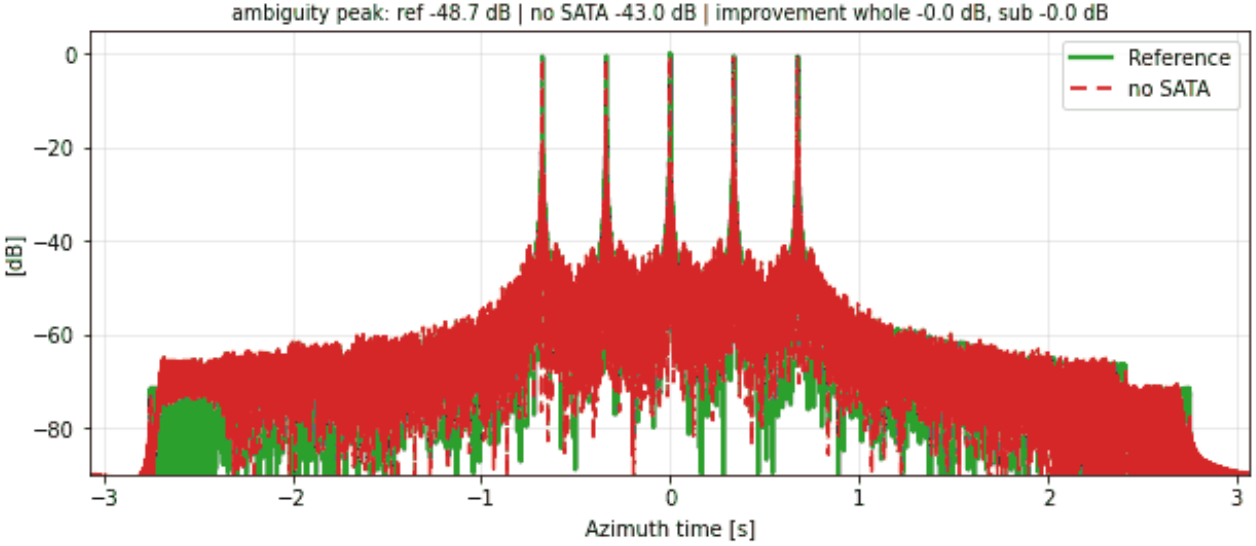



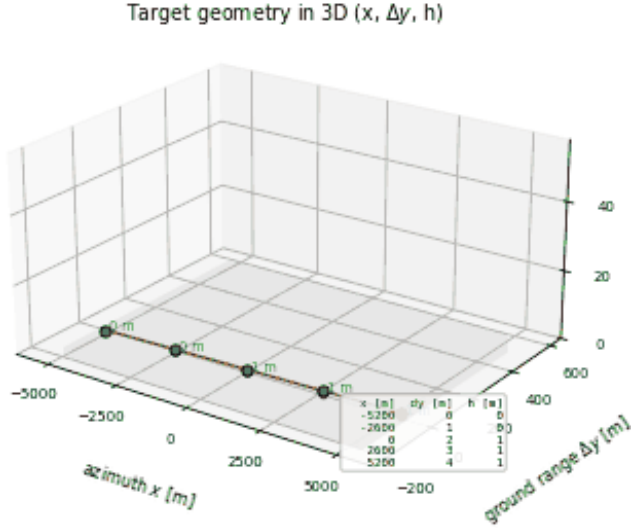



RA-NS-028 | SATA 1D | along-track ramp: N = 5, $\alpha = 1°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

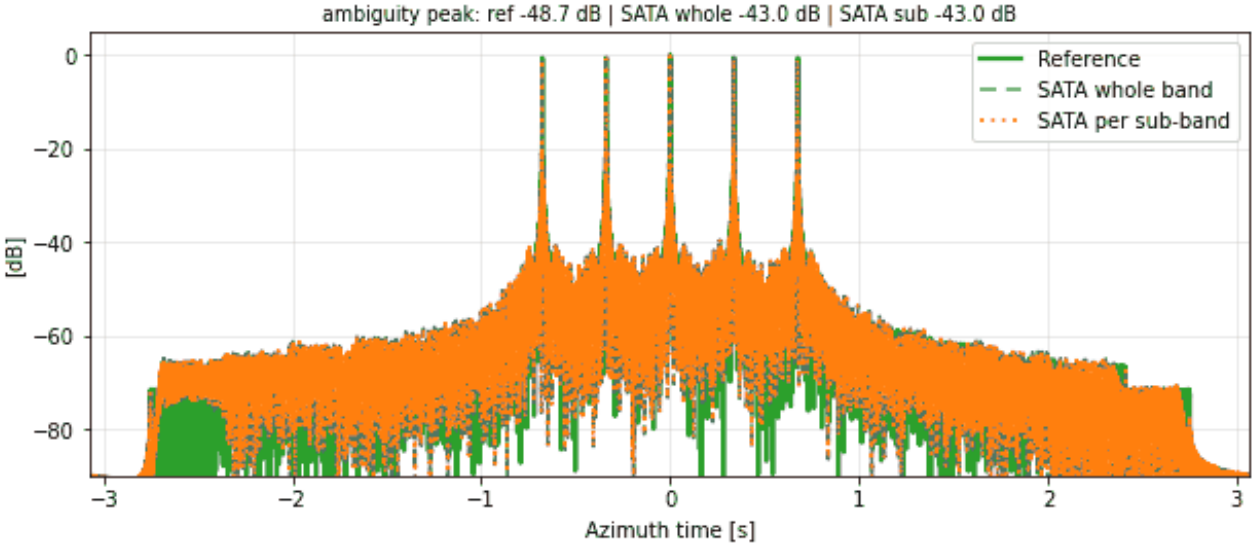


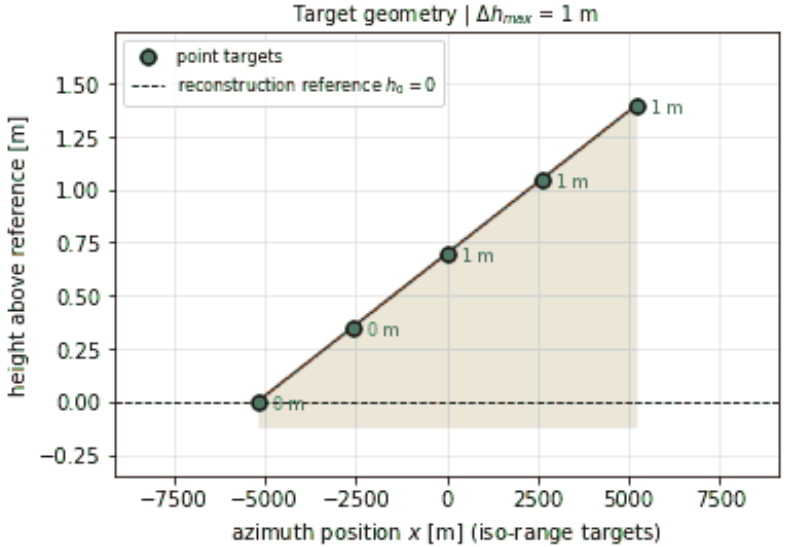



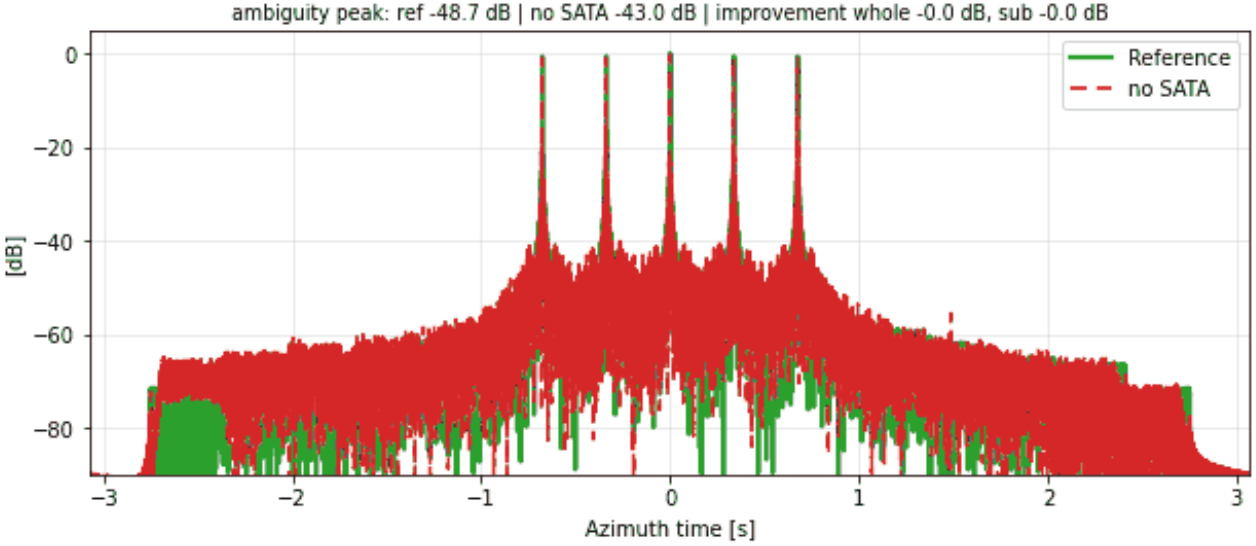



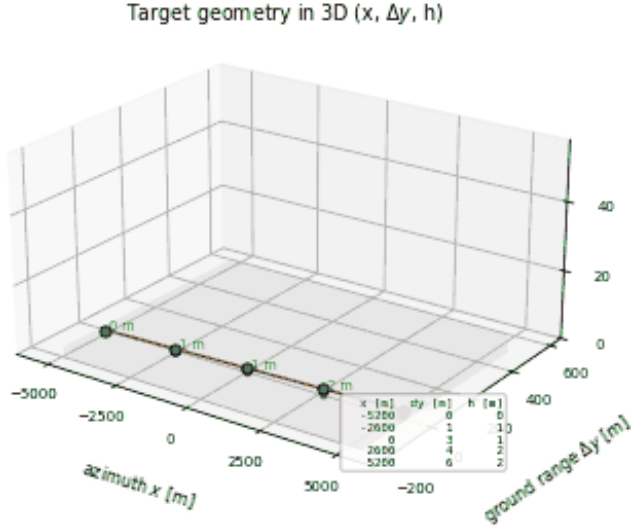



RA-NS-029 | SATA 1D | along-track ramp: N = 5, $\alpha$ = 1.5° (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

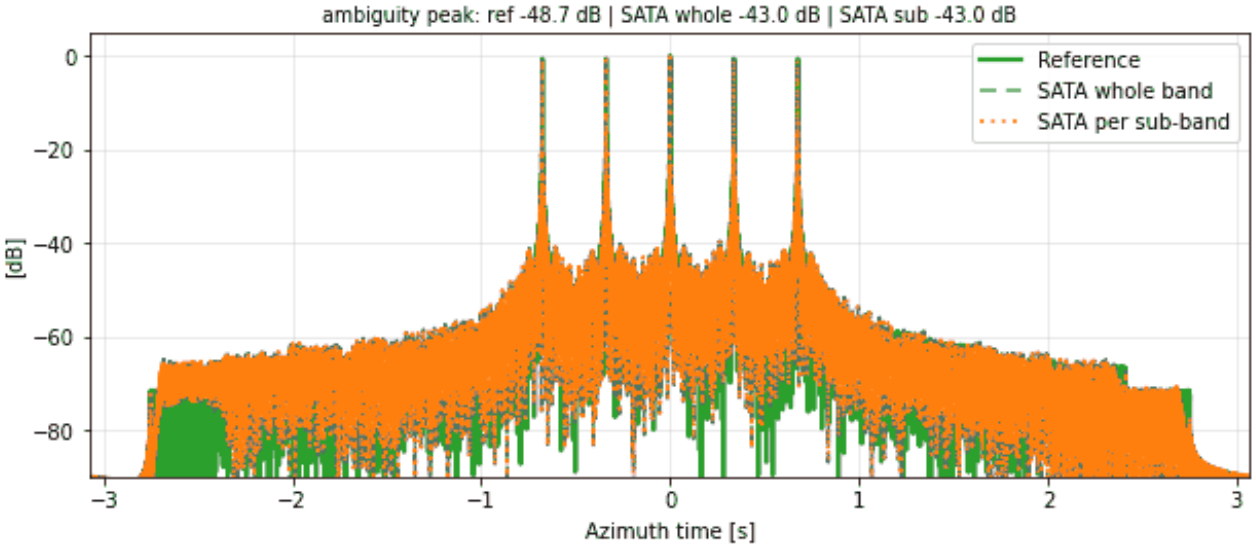


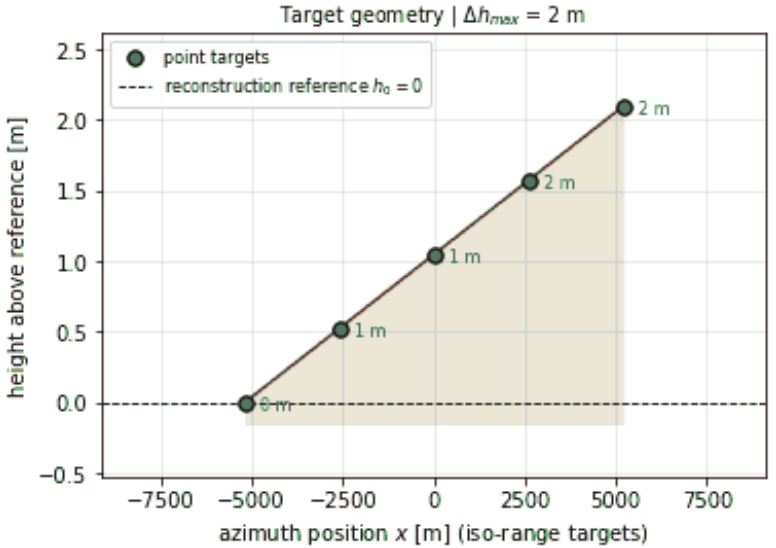



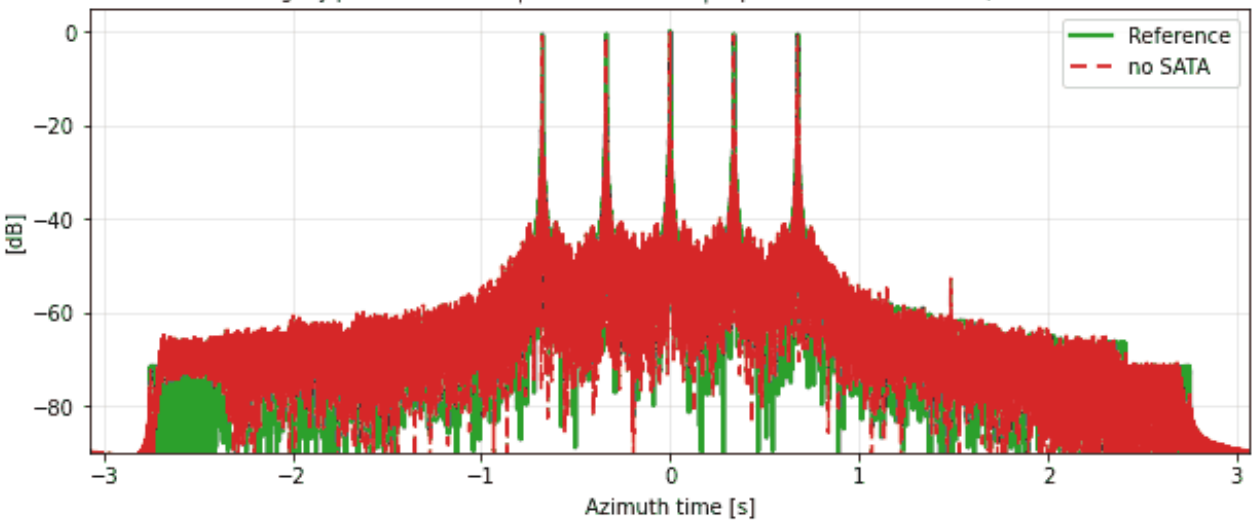



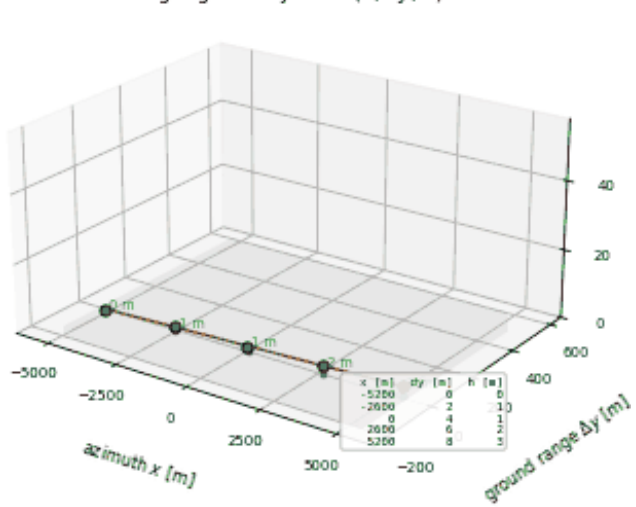



RA-NS-030 | SATA 1D | along-track ramp: N = 5, $\alpha = 2°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

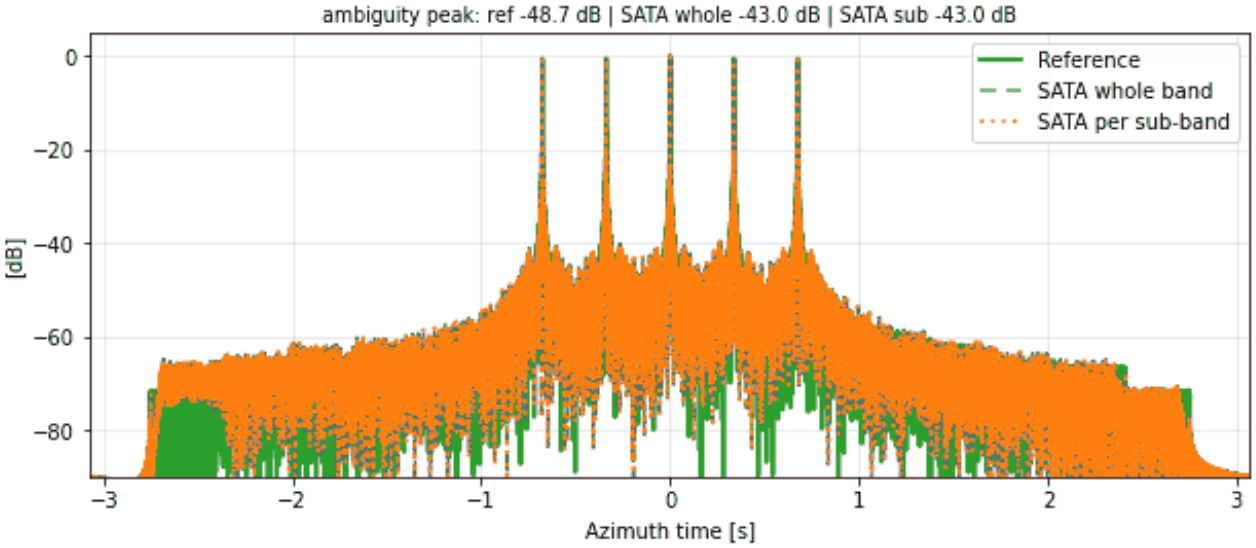


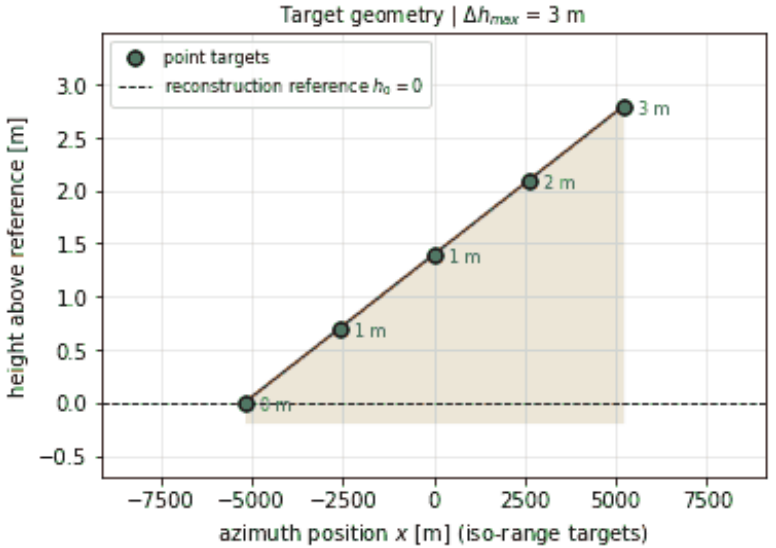



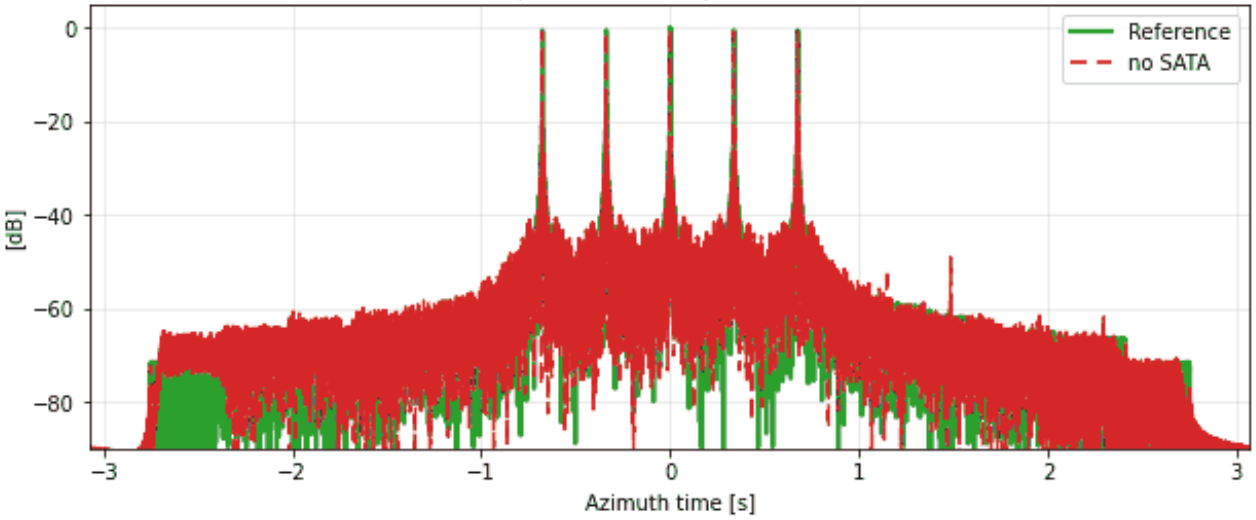



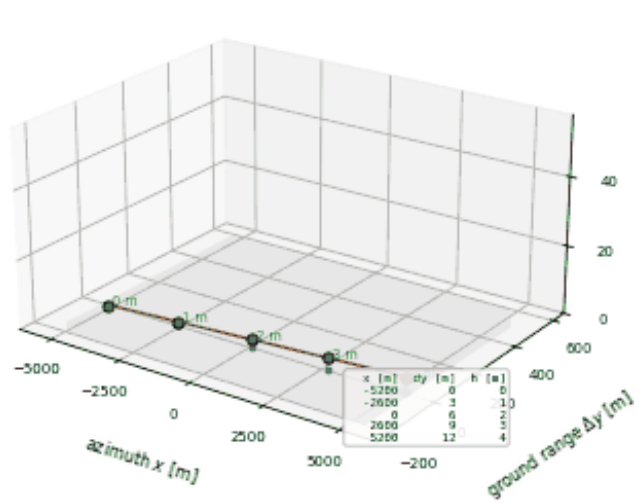



RA-NS-031 | SATA 1D | along-track ramp: N = 5, $\alpha = 3°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

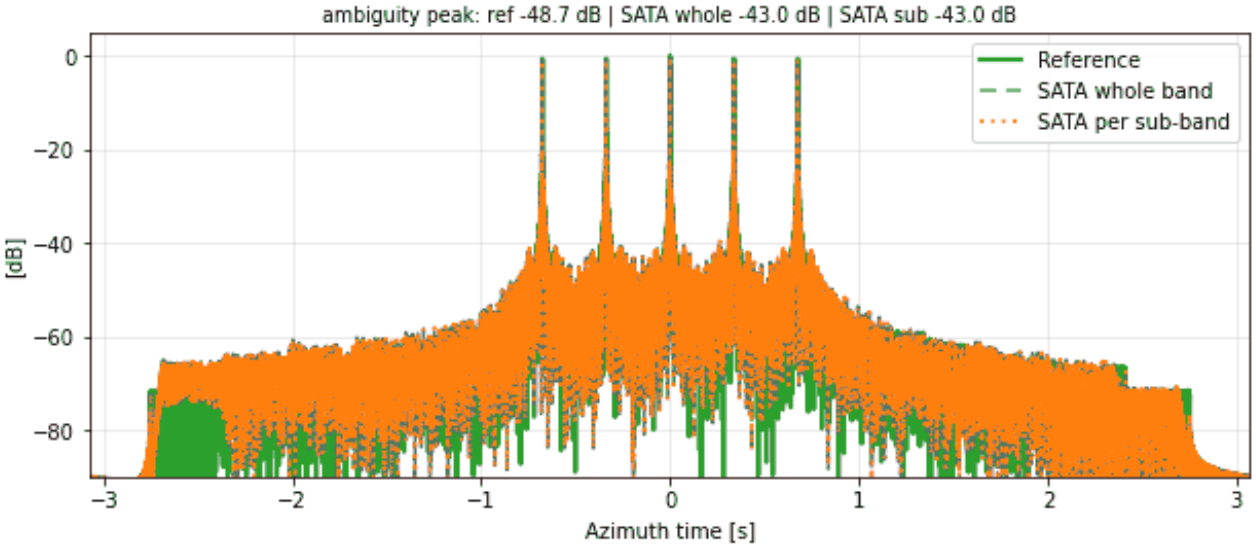


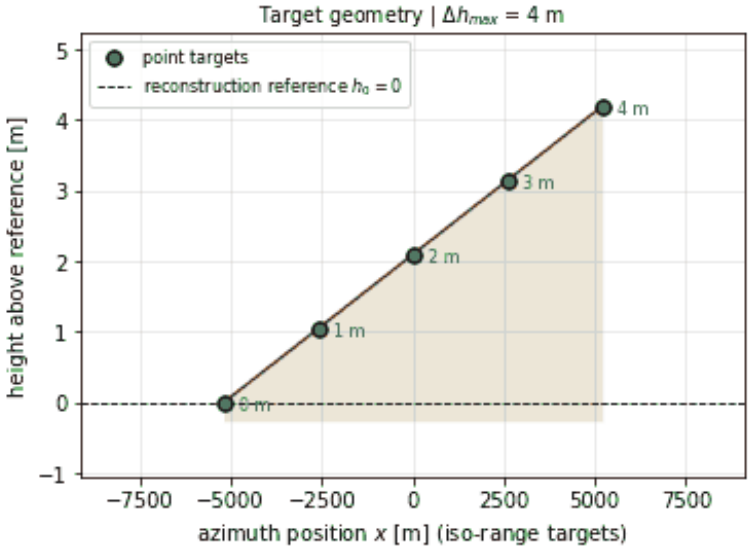



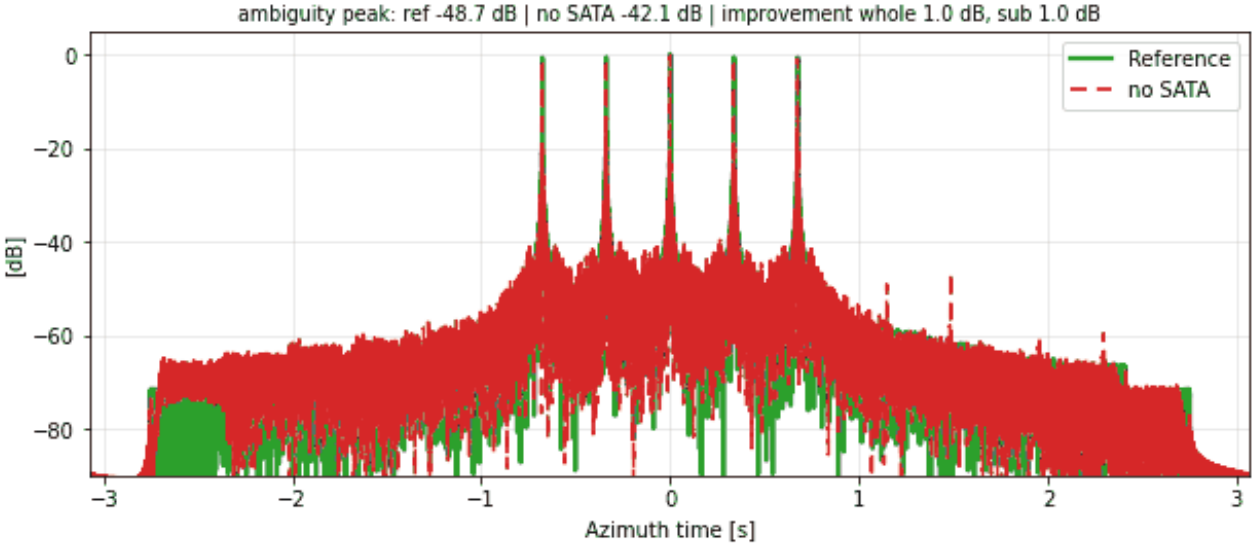



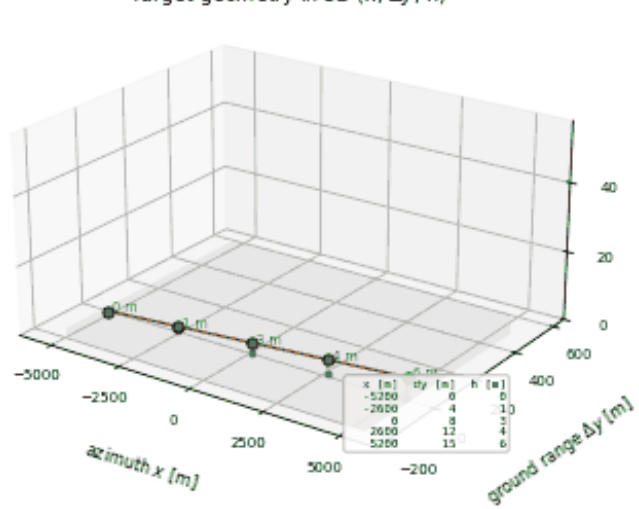



RA-NS-032 | SATA 1D | along-track ramp: N = 5, $\alpha = 4°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

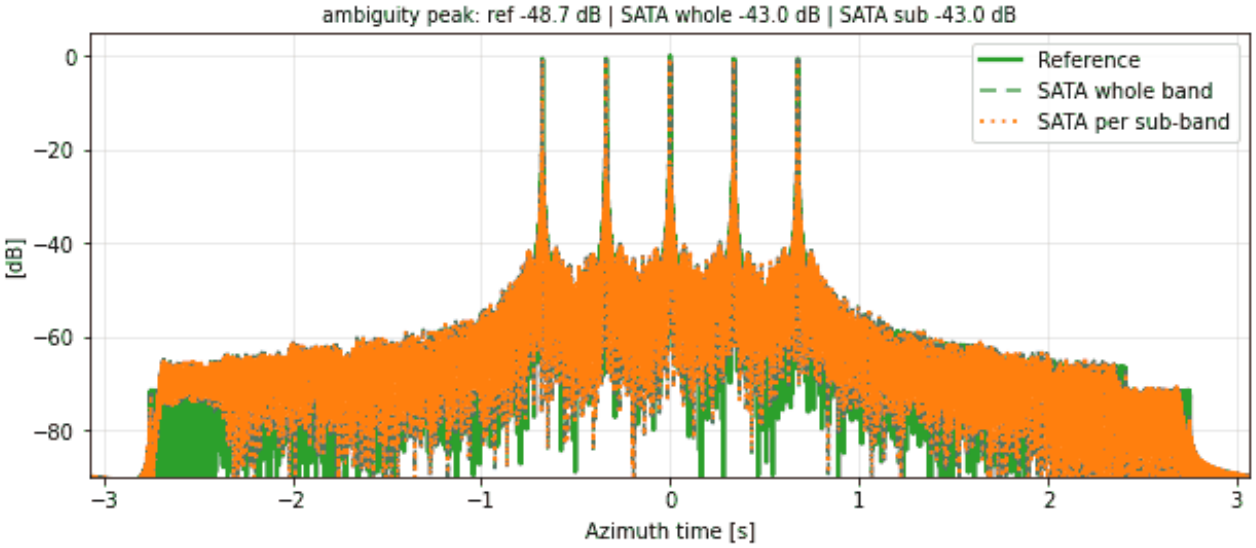


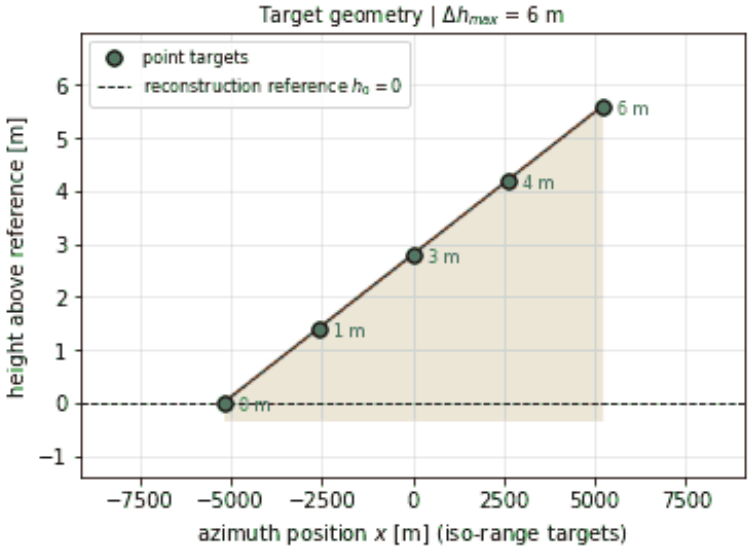



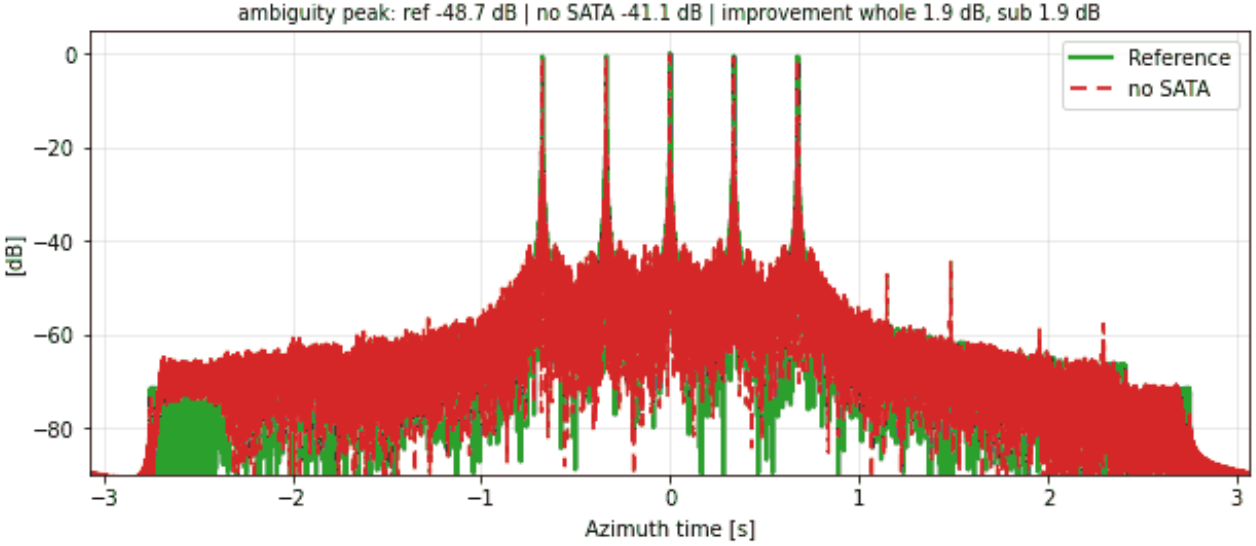



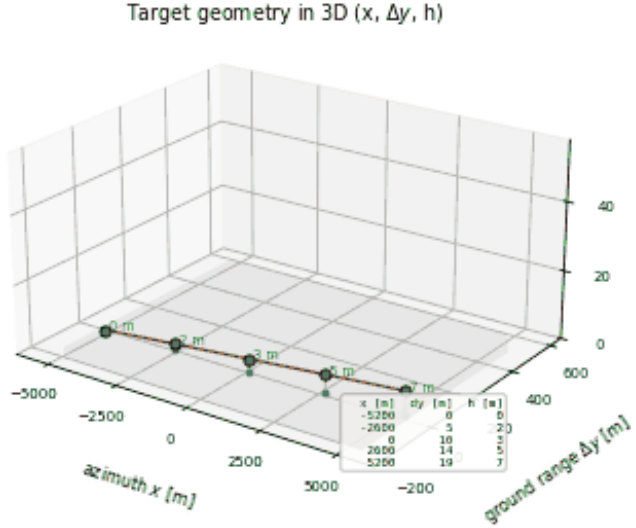



RA-NS-033 | SATA 1D | along-track ramp: N = 5, $\alpha = 5°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

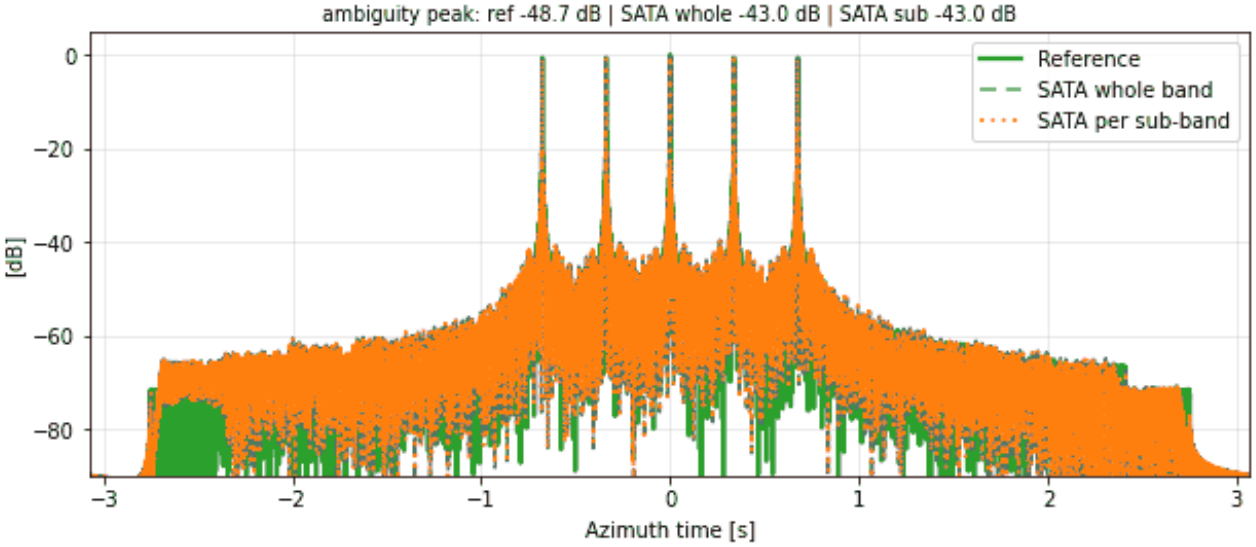


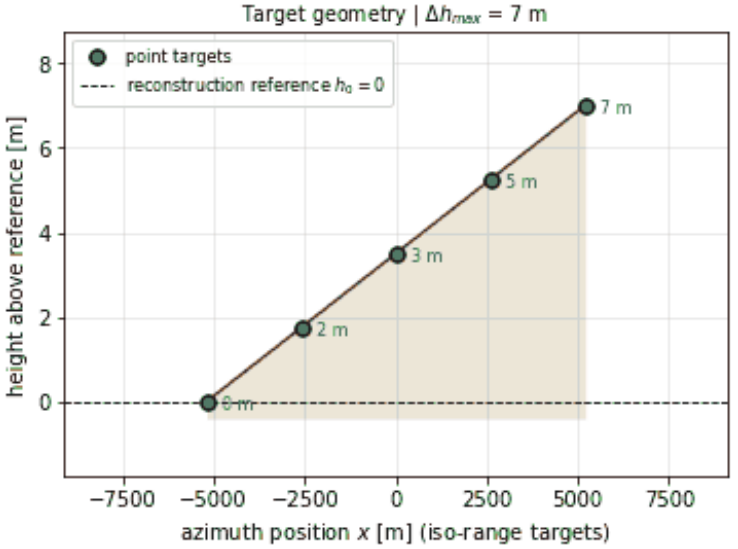



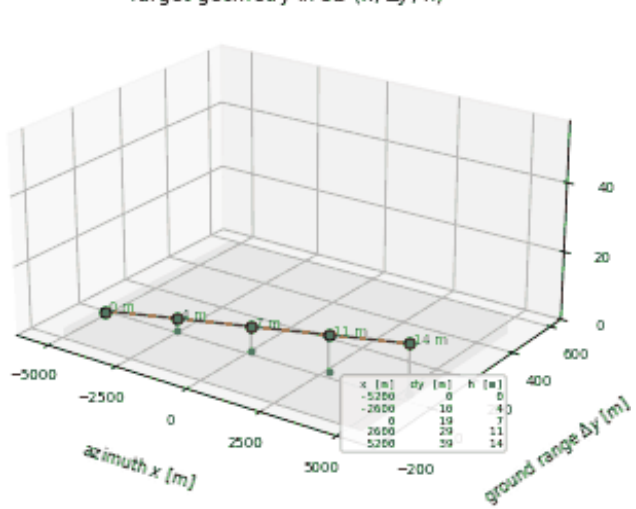
RA-NS-034 | SATA 1D | along-track ramp: N = 5, $\alpha = 10^\circ$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



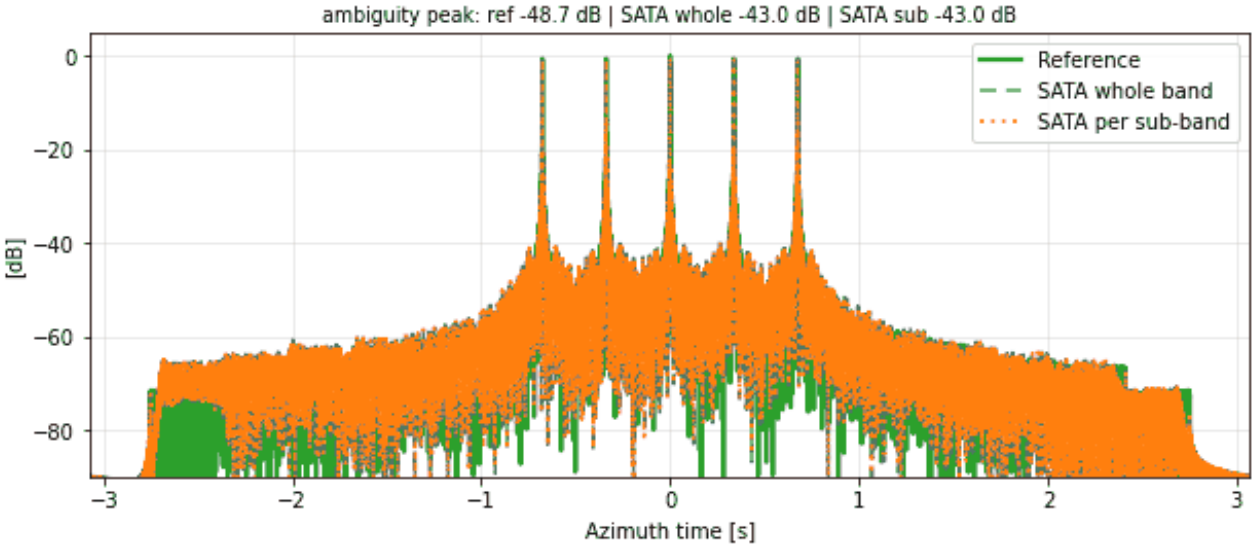



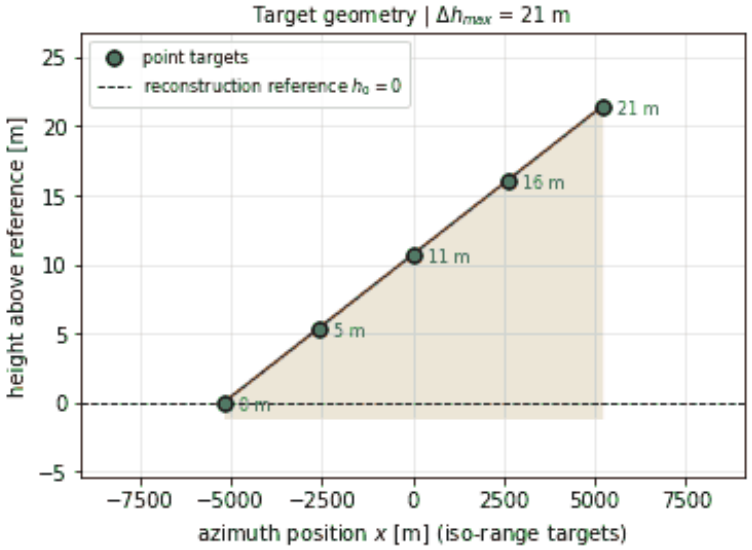


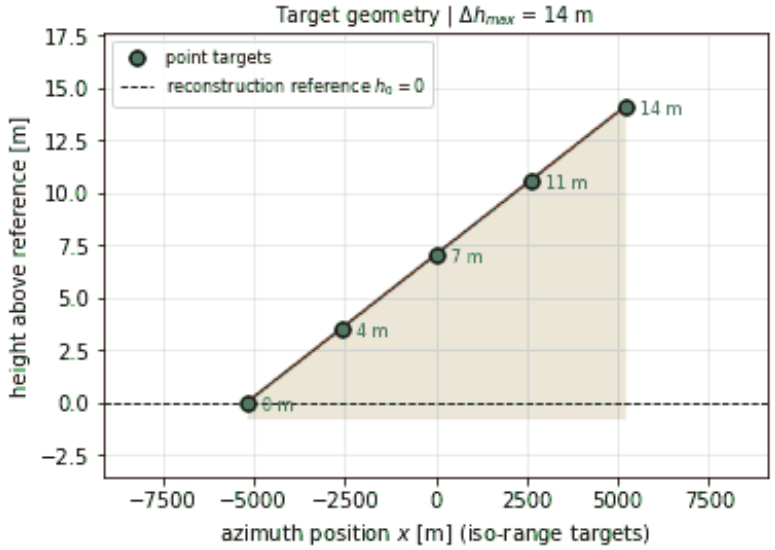





RA-NS-035 | SATA 1D | along-track ramp: N = 5, $\alpha = 15^\circ$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

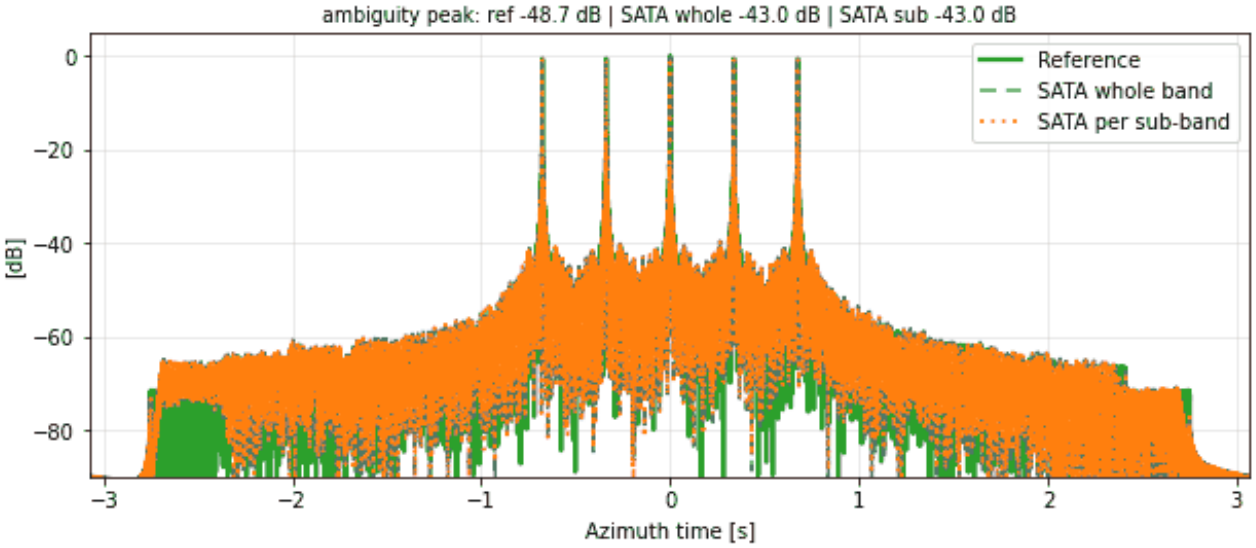


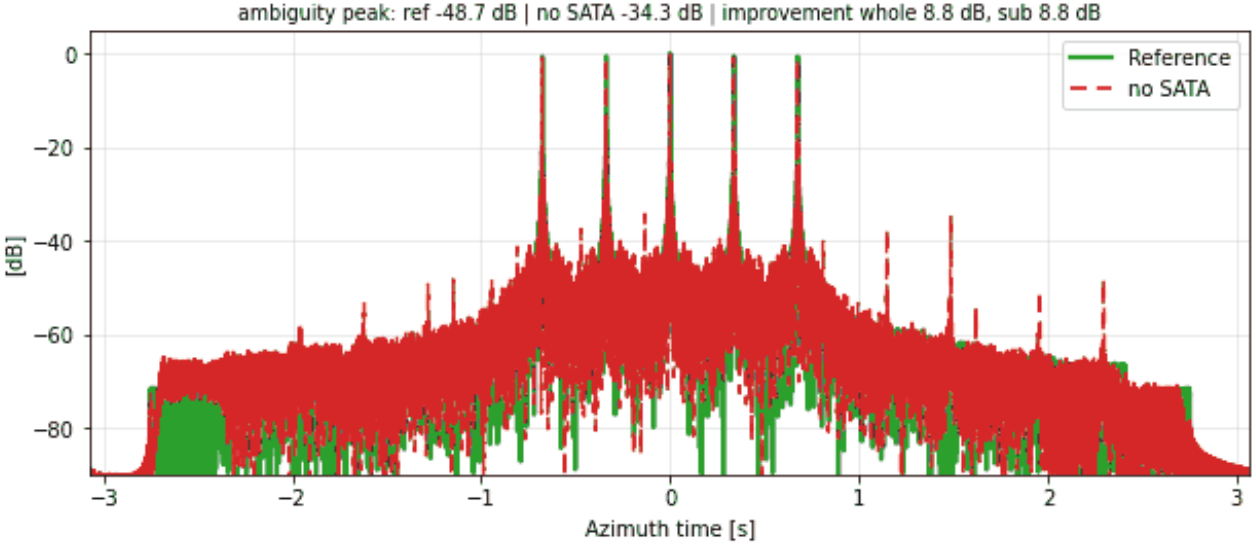



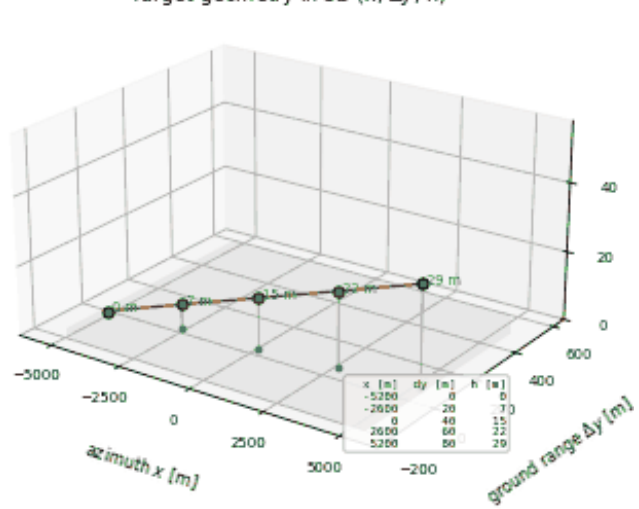
RA-NS-036 | SATA 1D | along-track ramp: N = 5, $\alpha = 20°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

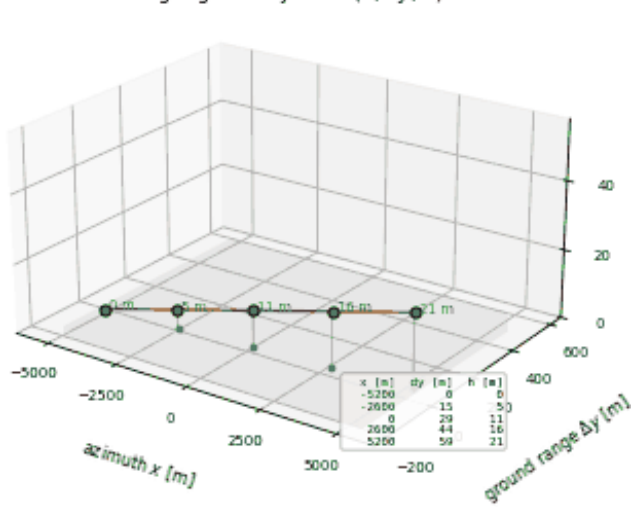

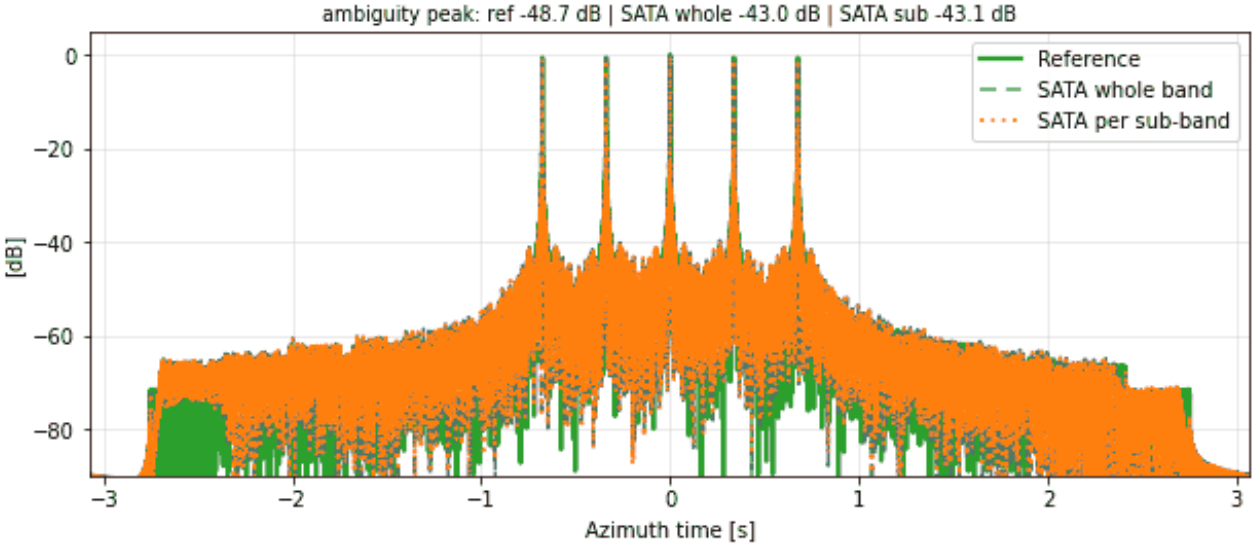



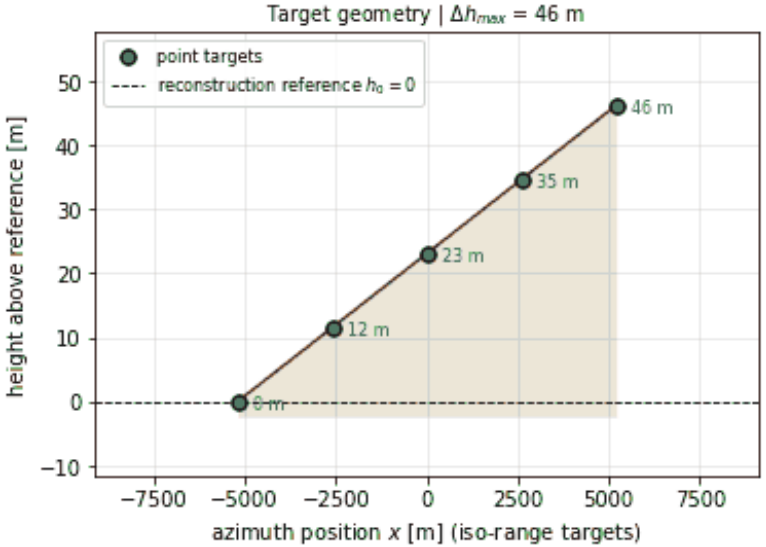


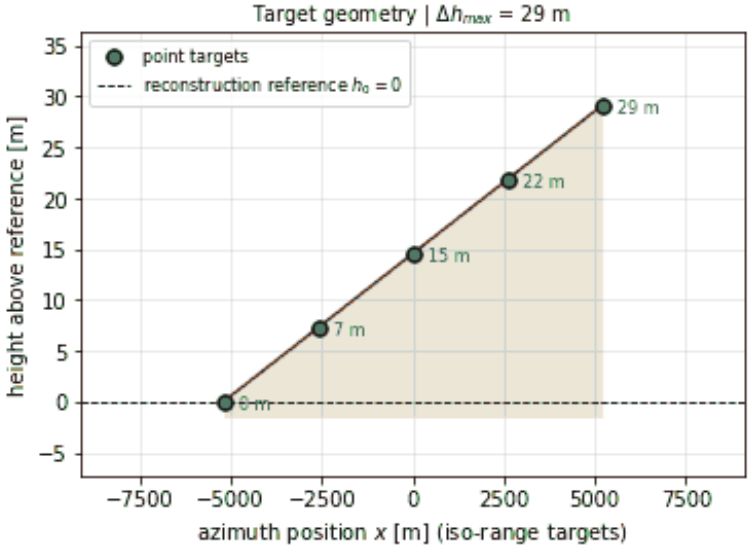





RA-NS-037 | SATA 1D | along-track ramp: N = 5, $\alpha = 30°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

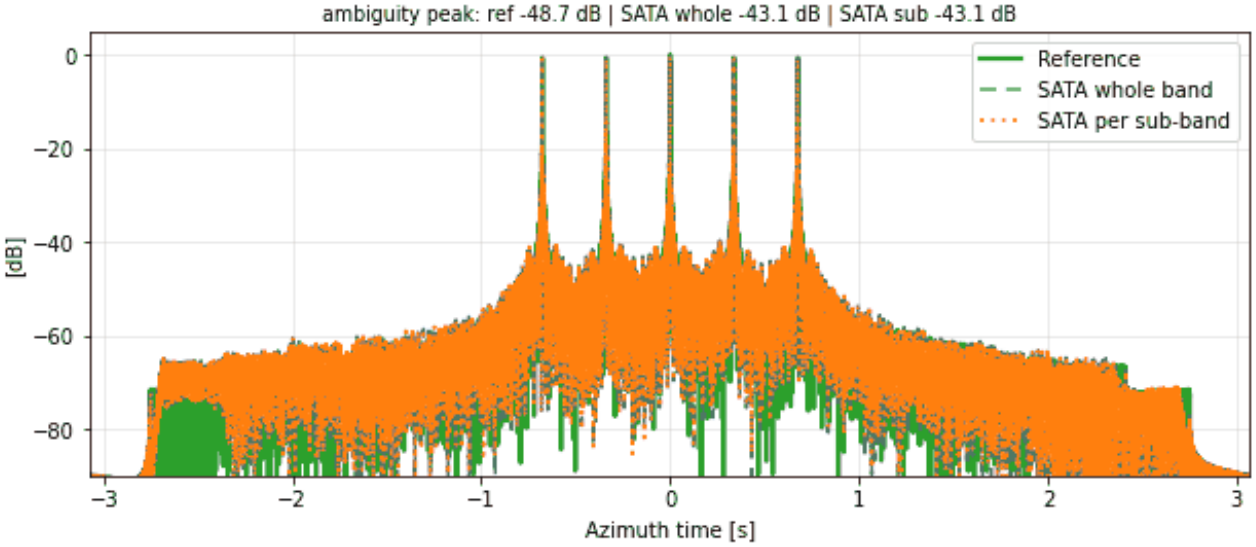


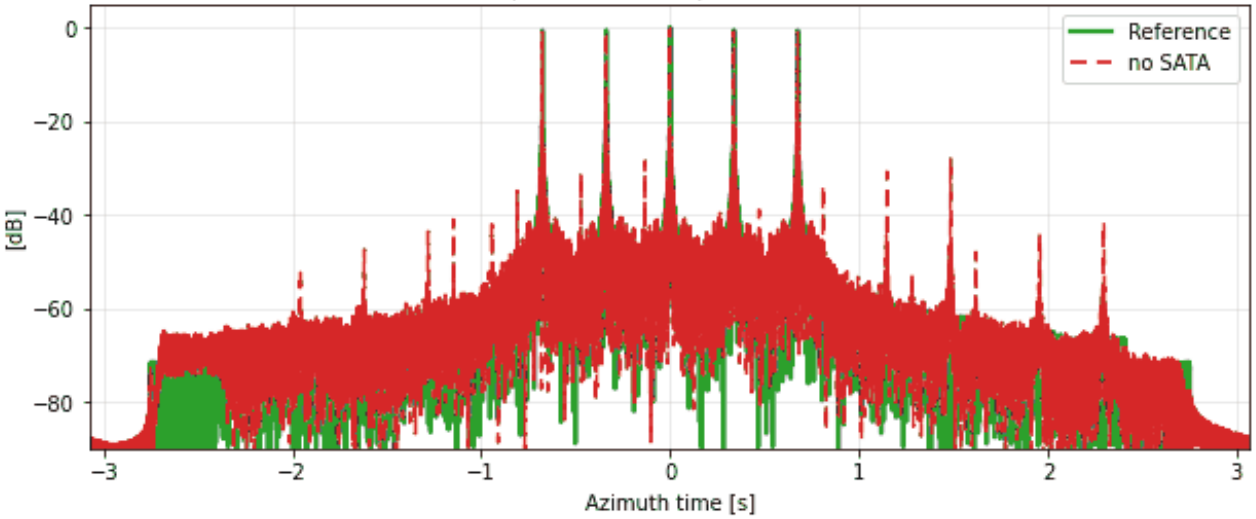



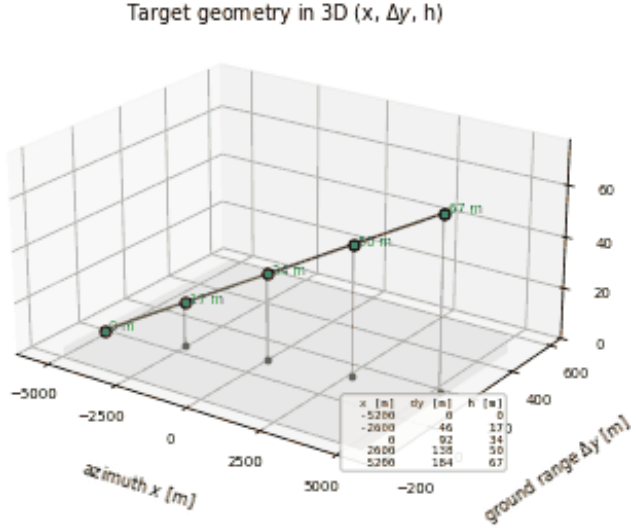
RA-NS-038 | SATA 1D | along-track ramp: N = 5, $\alpha = 40°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

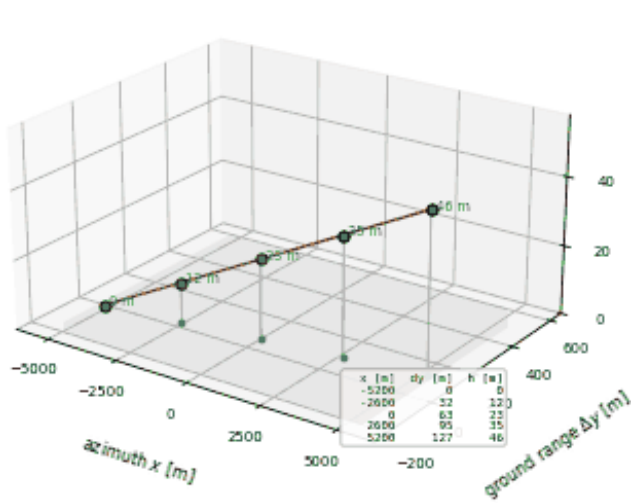

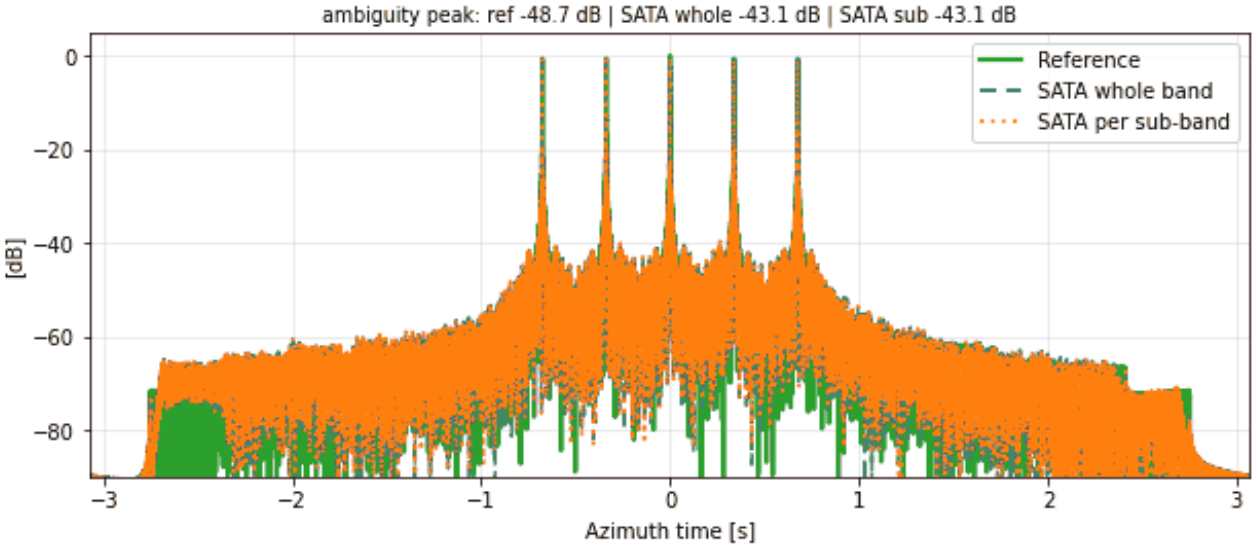



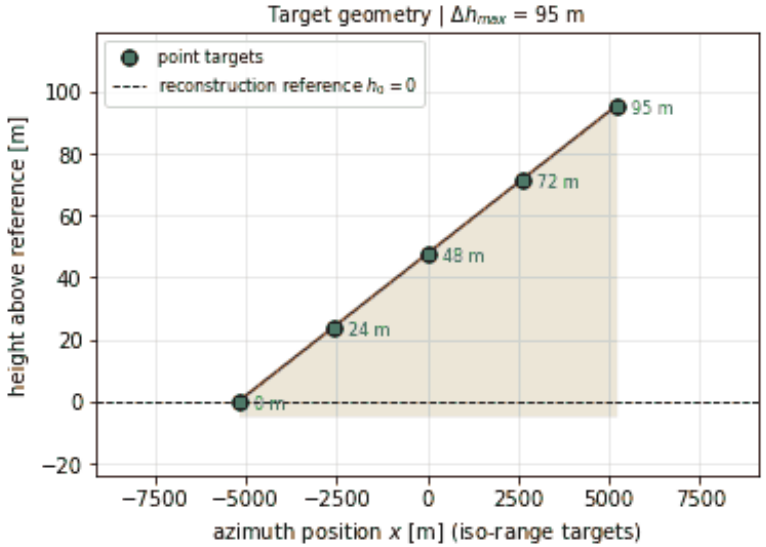


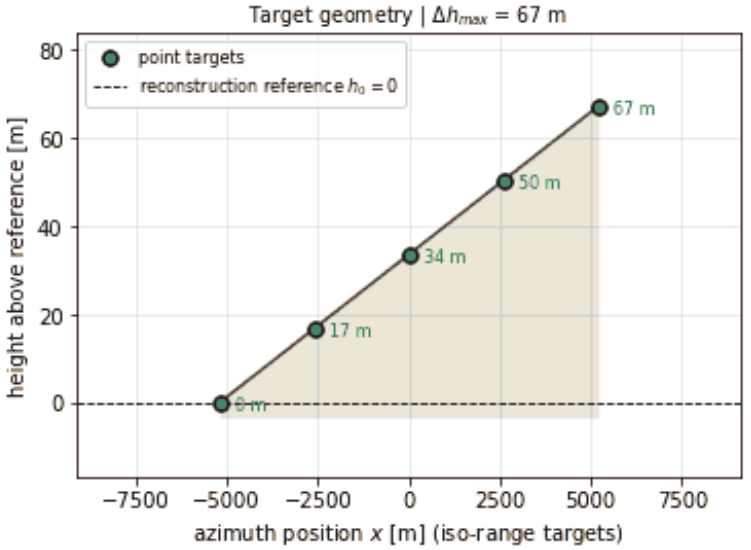





RA-NS-039 | SATA 1D | along-track ramp: N = 5, $\alpha = 50°$ (heights $j \cdot 20\tan\alpha$), targets 2.6 km apart (normal distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

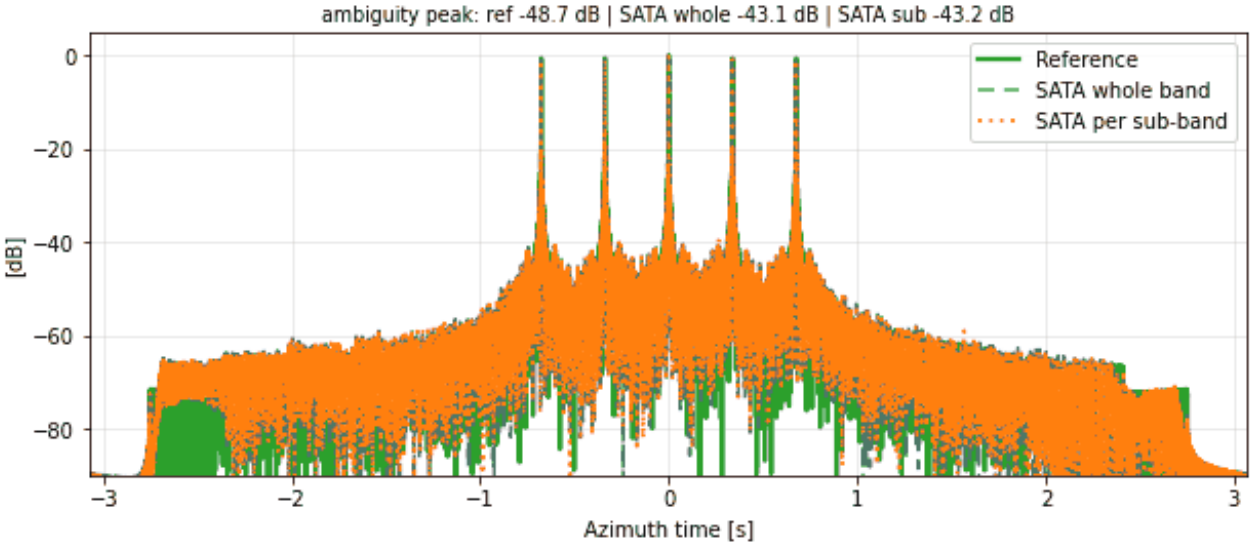


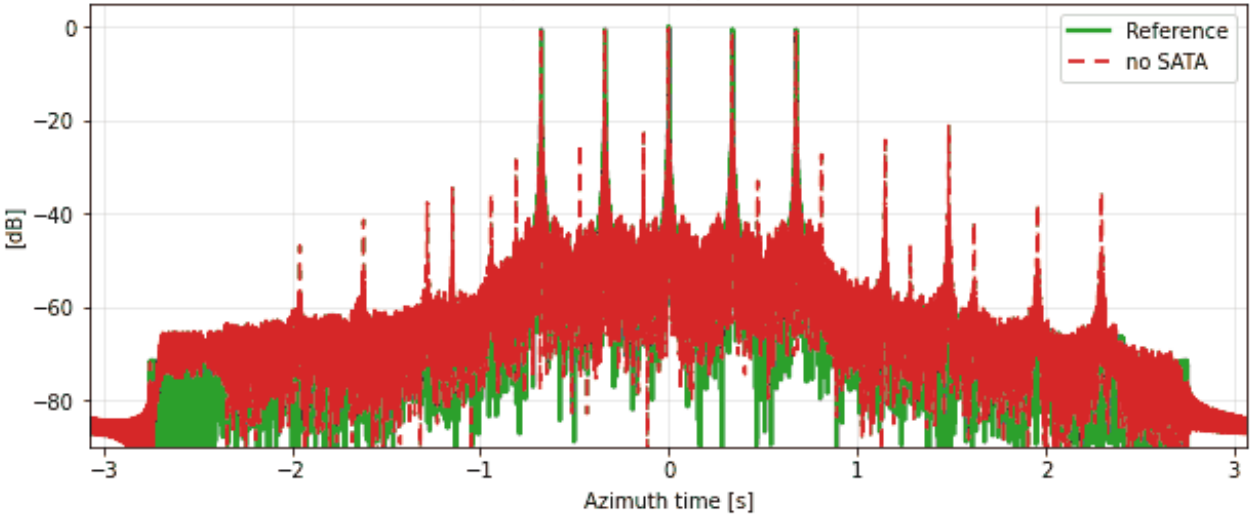



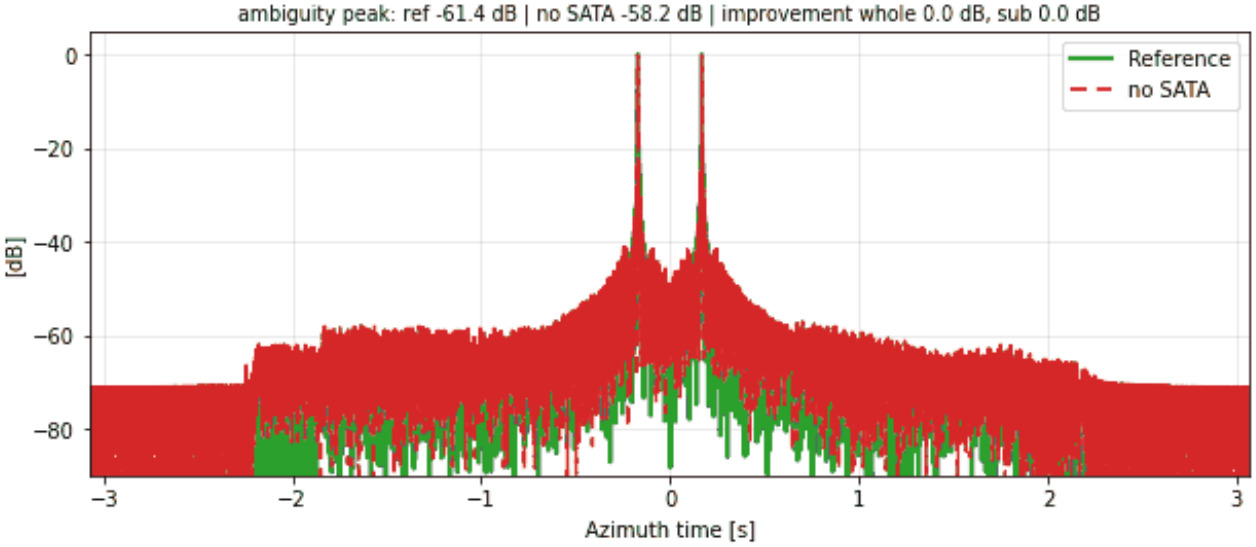


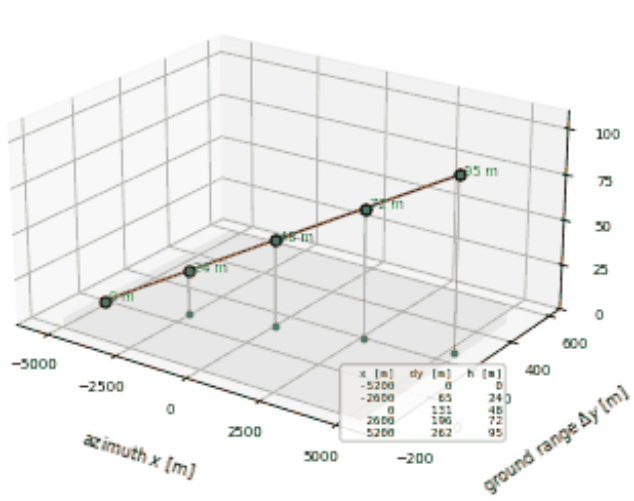
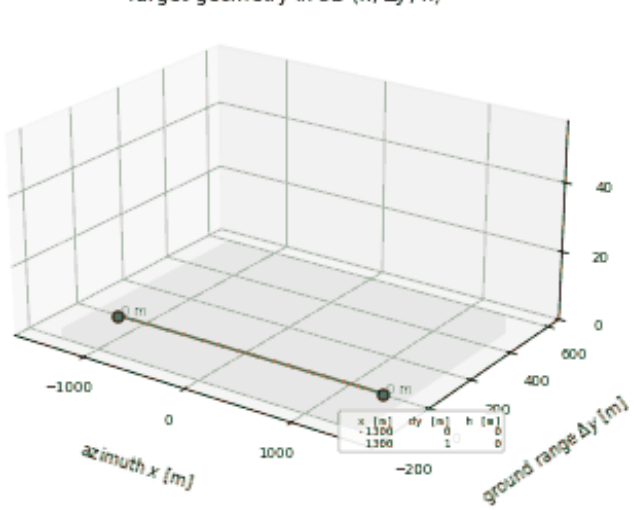



RA-NN-001 | SATA 1D | along-track ramp: N = 2, $\alpha = 0.1°$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

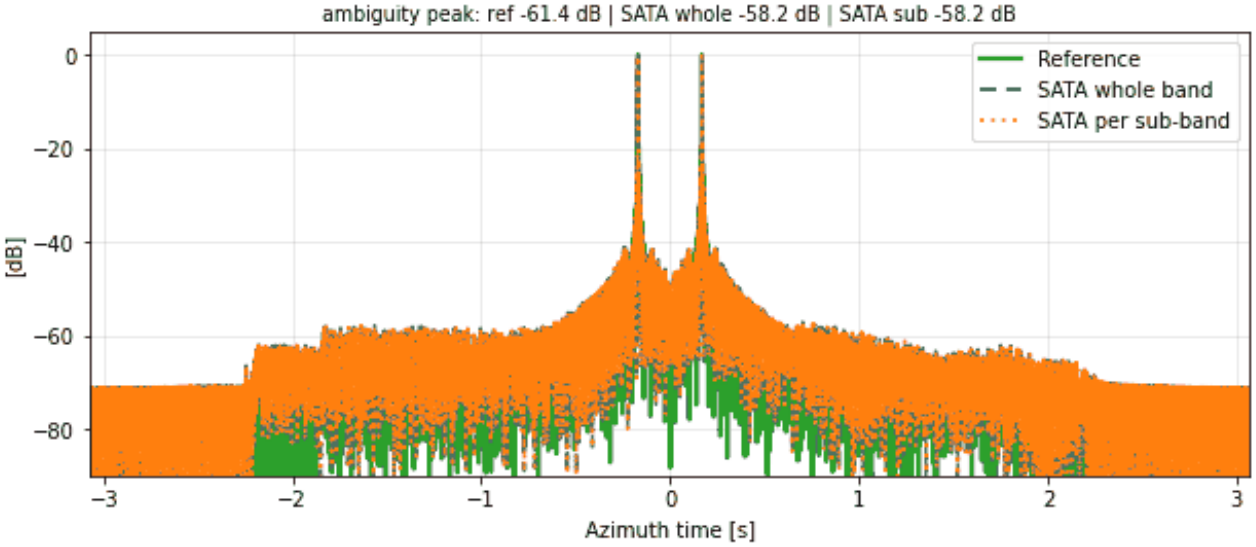


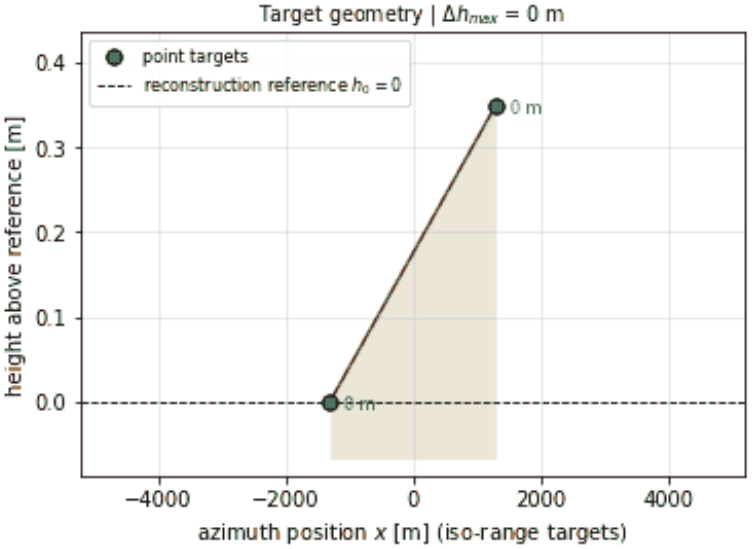



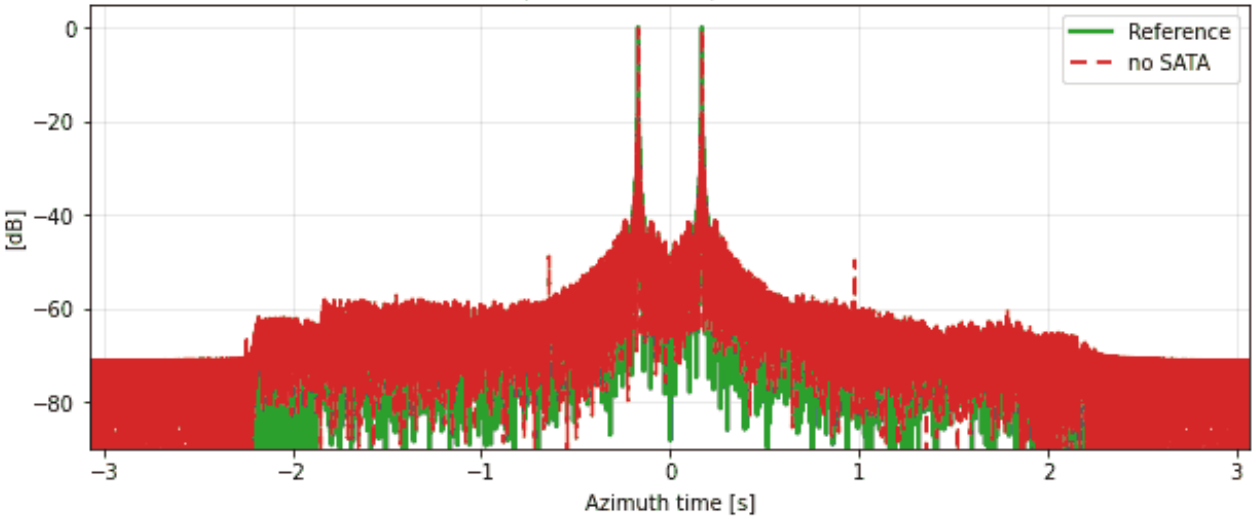



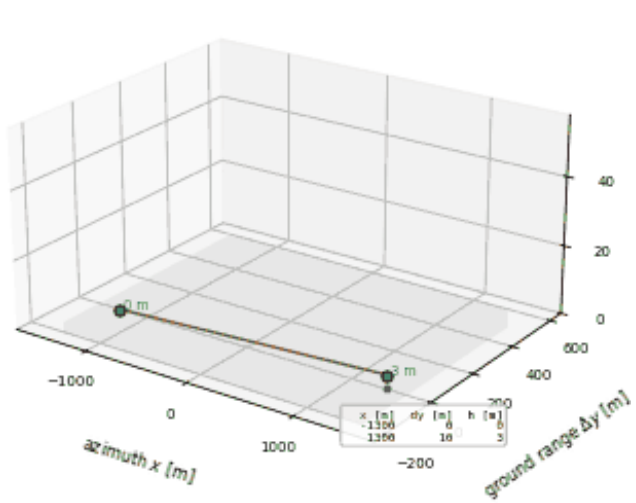



RA-NN-002 | SATA 1D | along-track ramp: N = 2, $\alpha = 1°$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

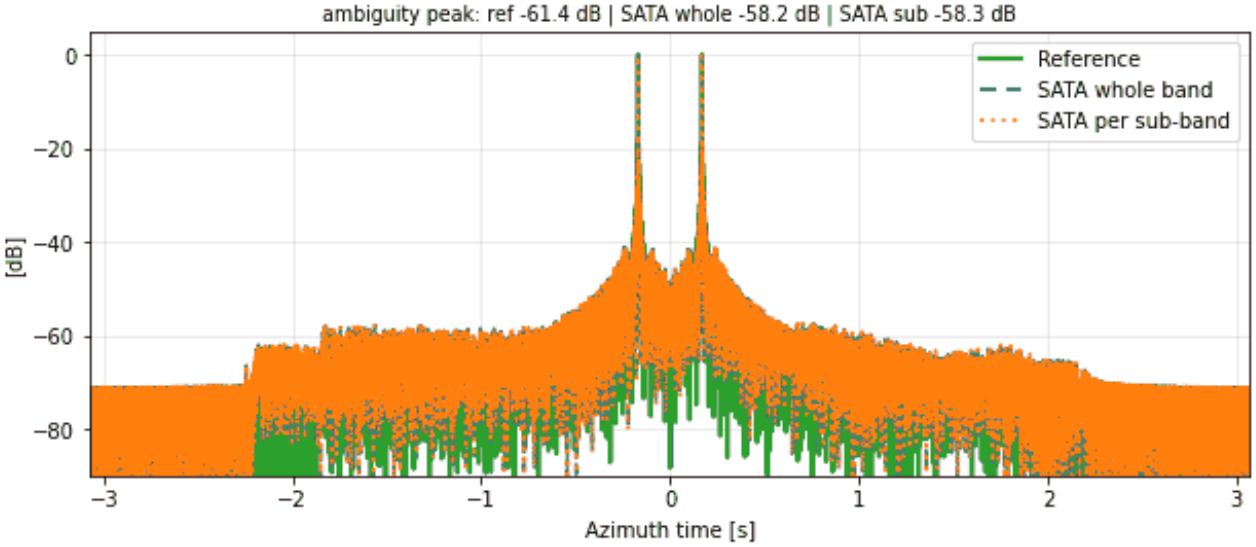


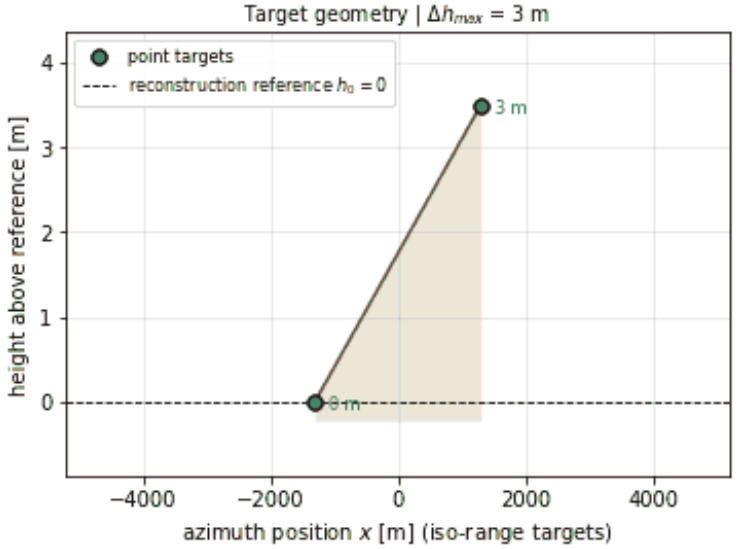



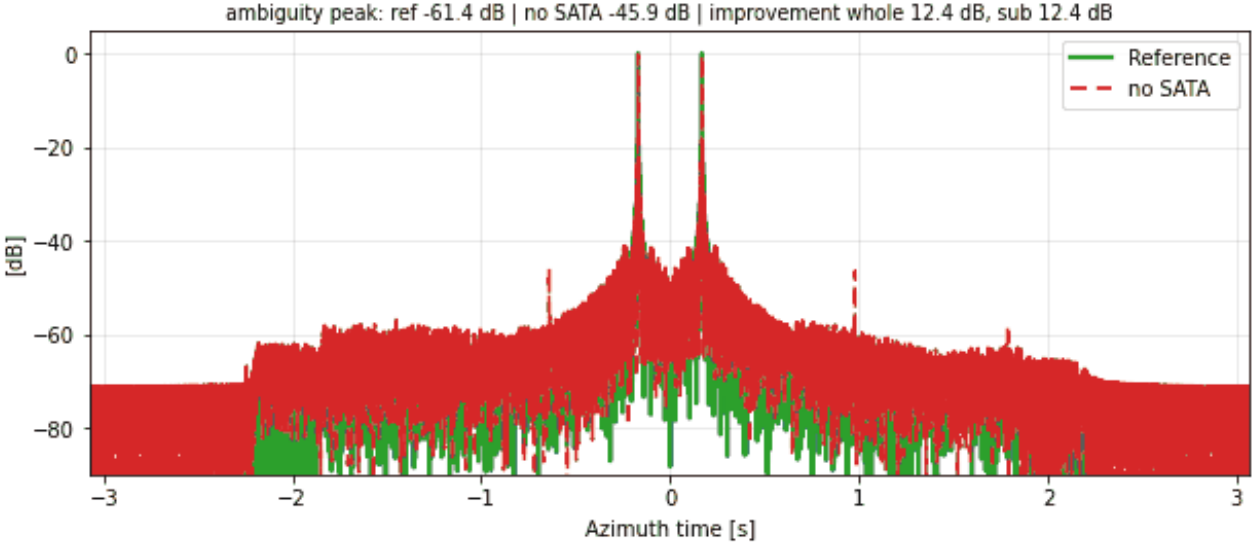



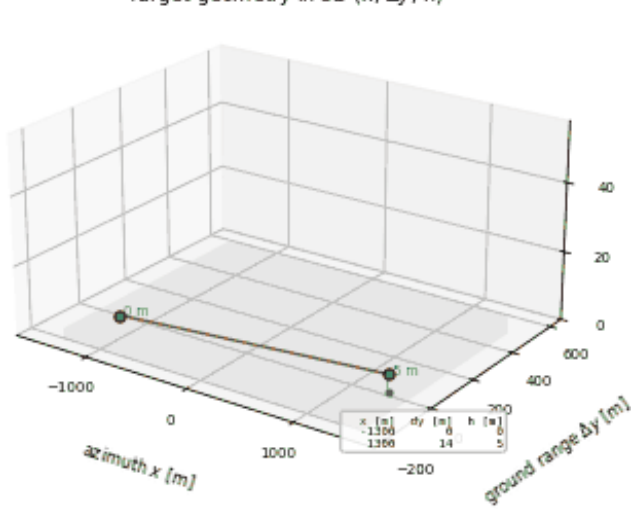



RA-NN-003 | SATA 1D | along-track ramp: N = 2, $\alpha = 1.5^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

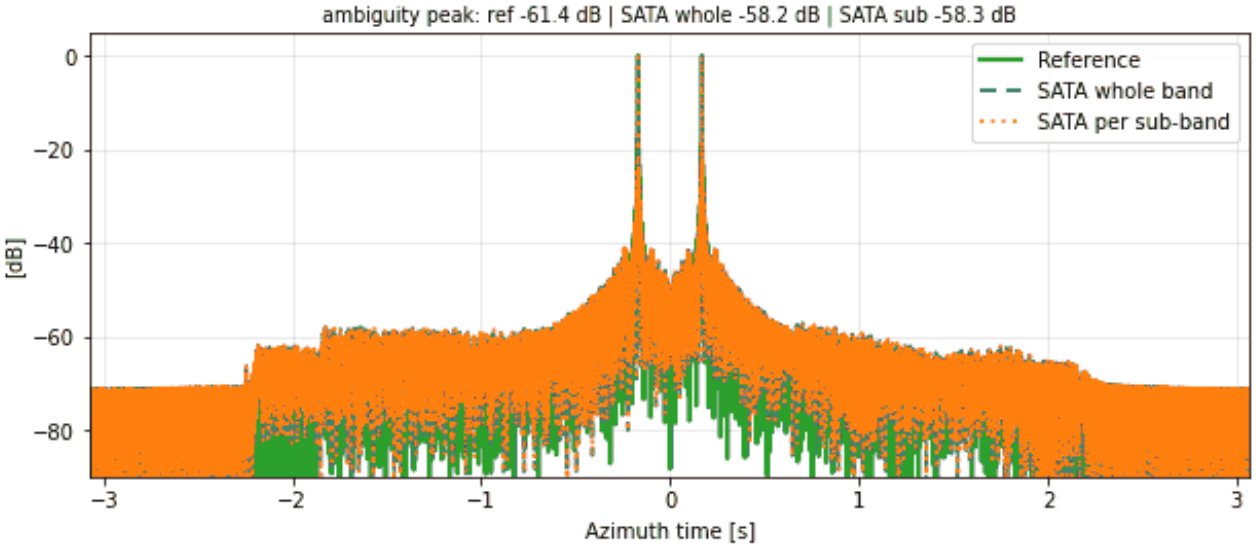


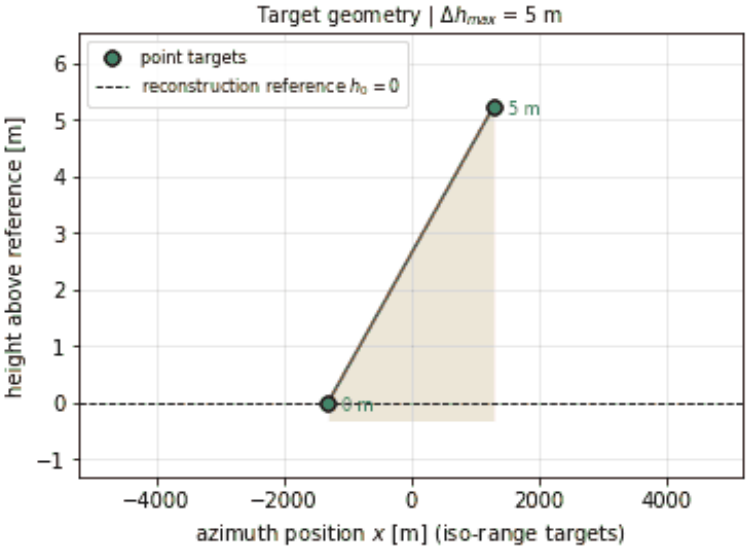



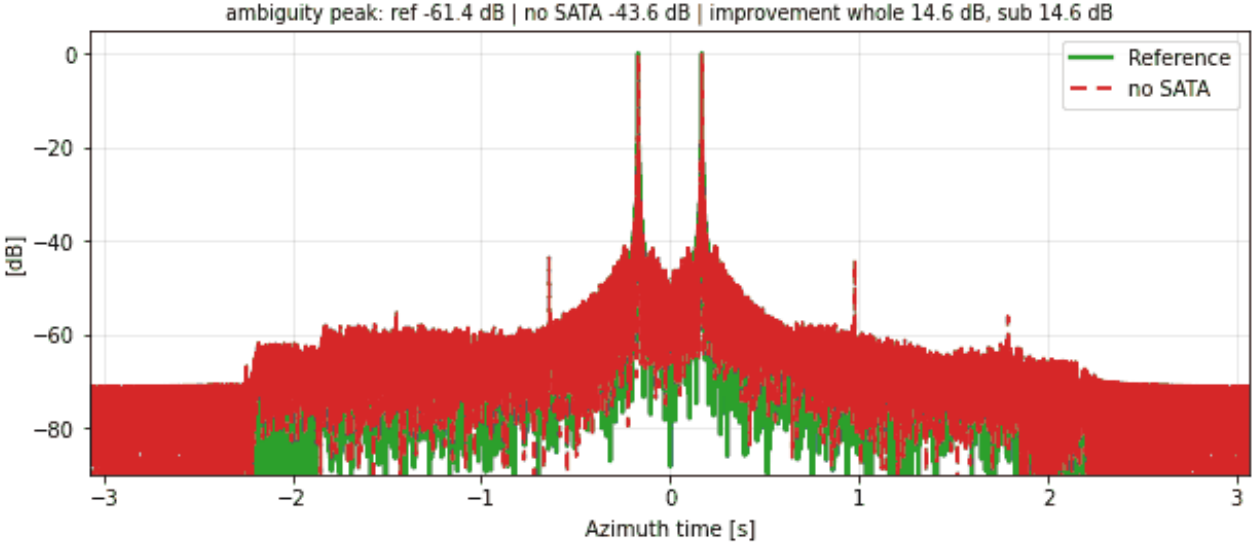



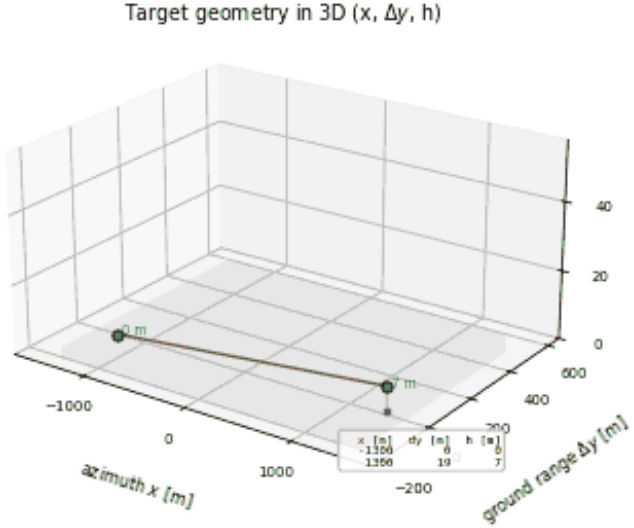



RA-NN-004 | SATA 1D | along-track ramp: N = 2, $\alpha = 2^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

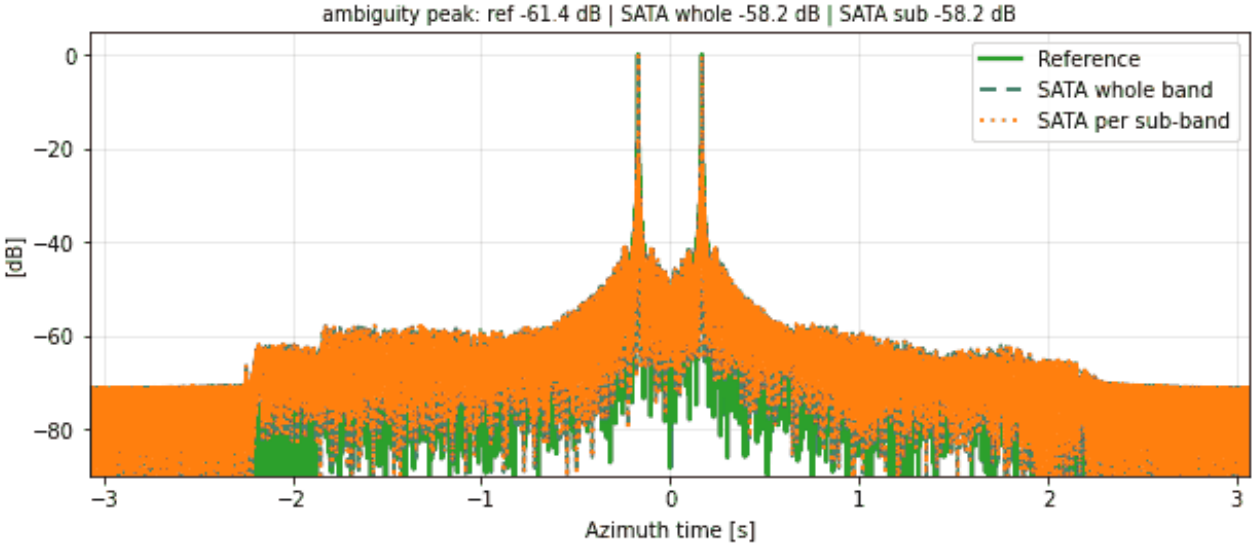

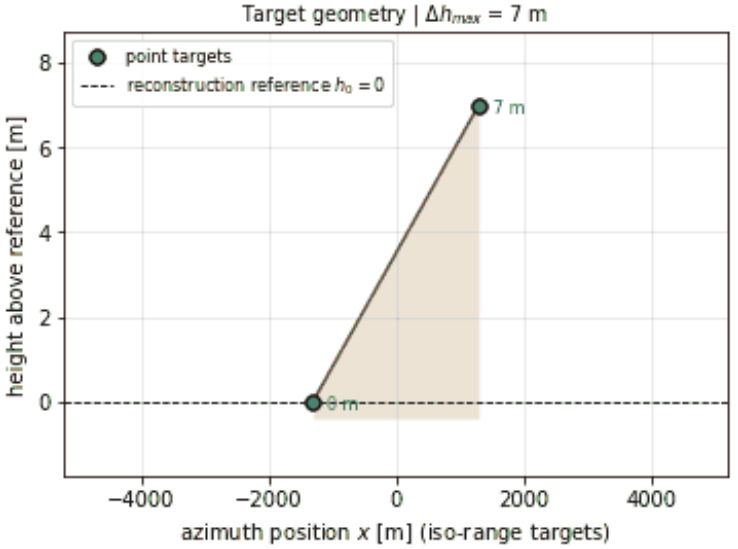



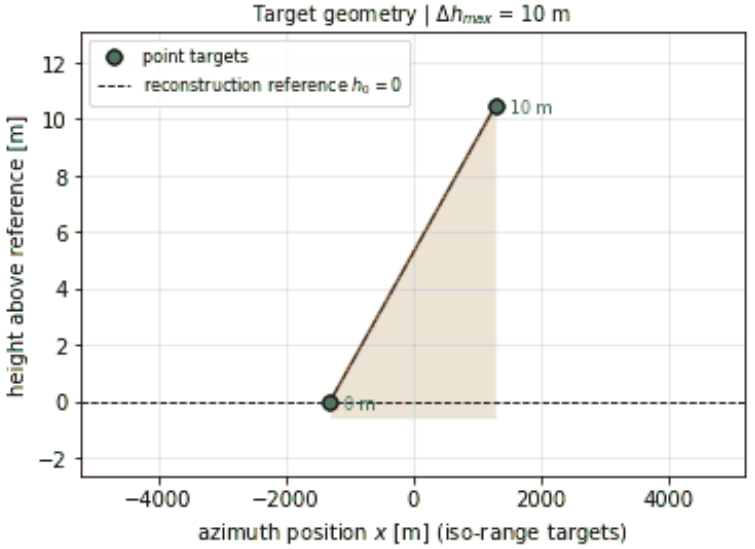



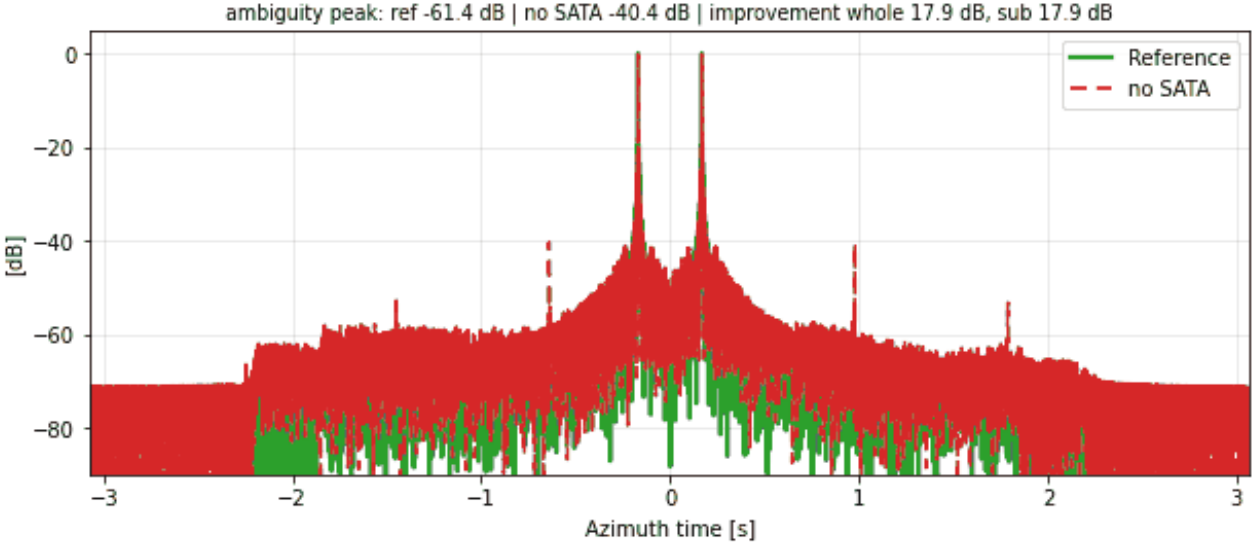



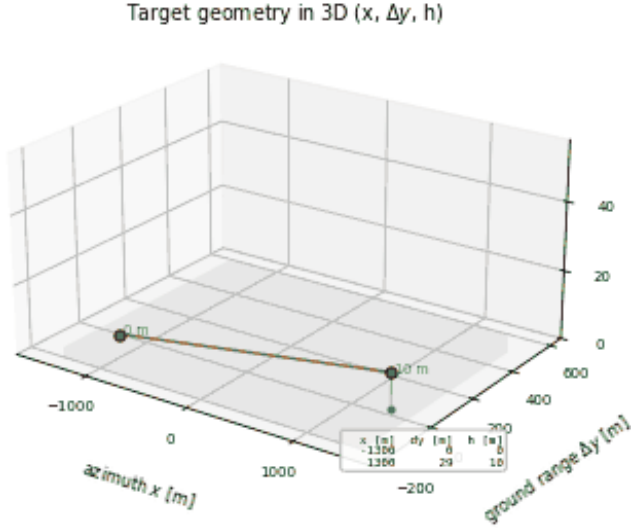

300

RA-NN-005 | SATA 1D | along-track ramp: N = 2, $\alpha = 3°$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

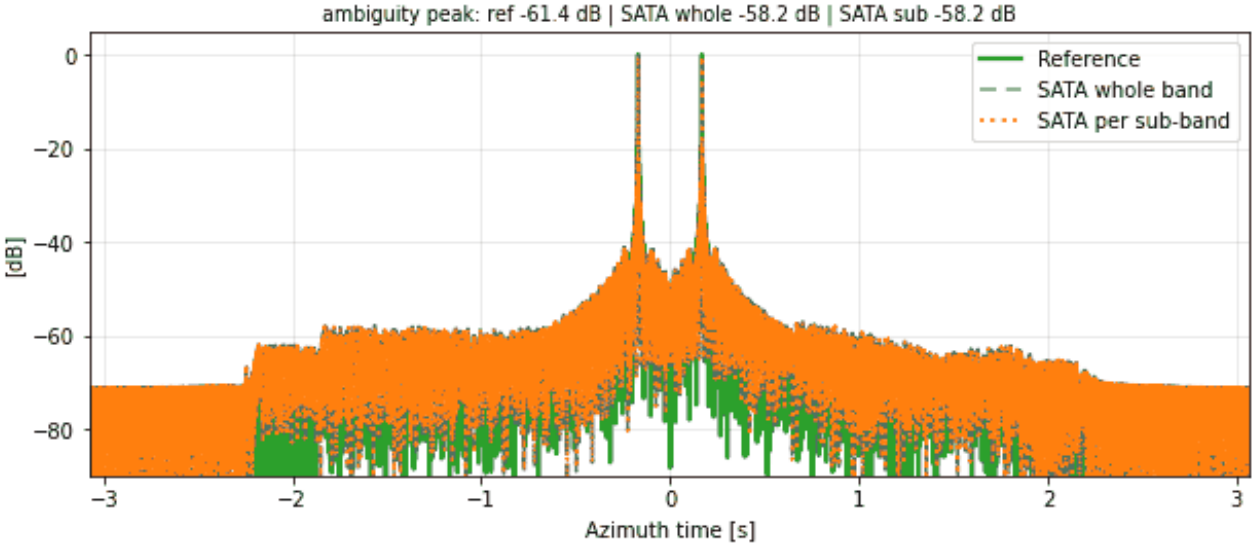






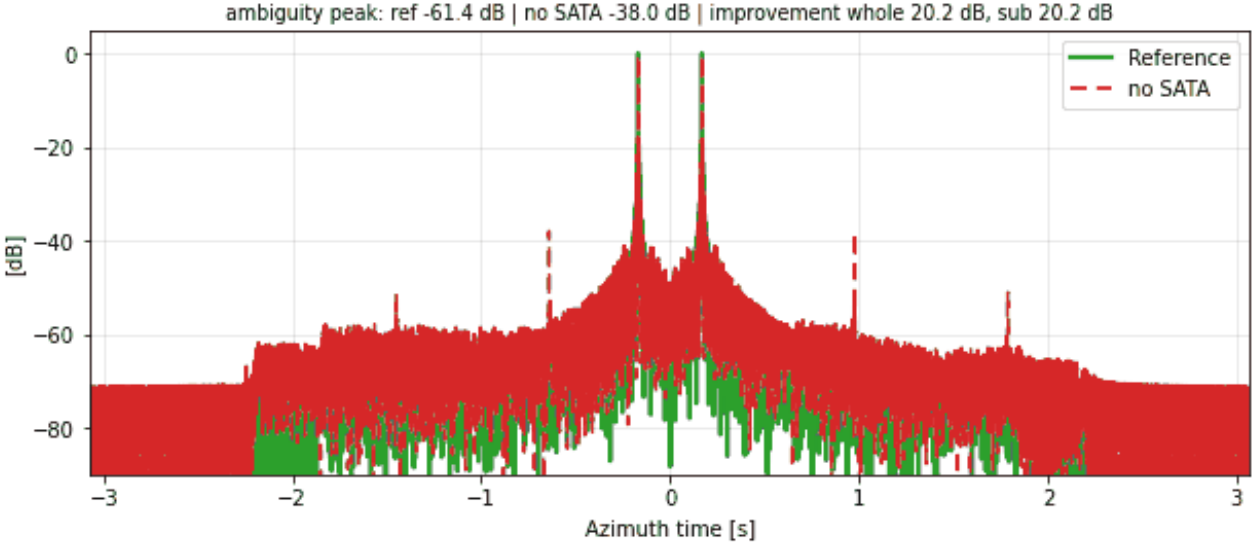



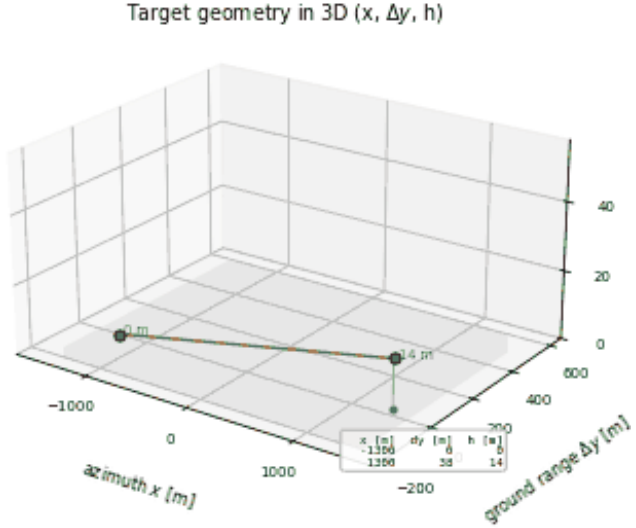



RA-NN-006 | SATA 1D | along-track ramp: N = 2, $\alpha = 4°$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

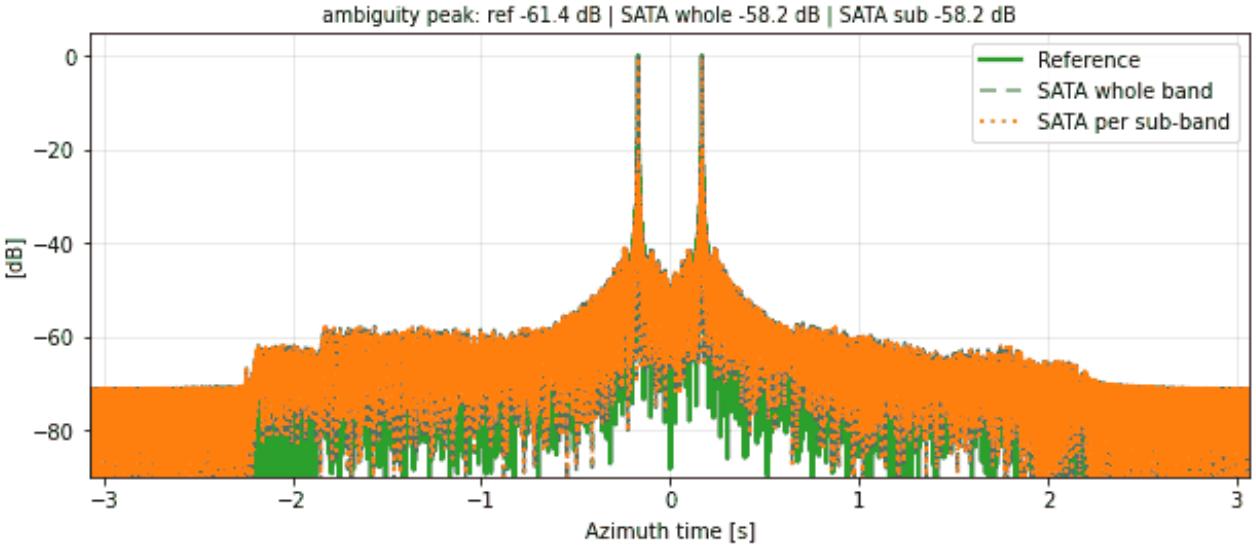


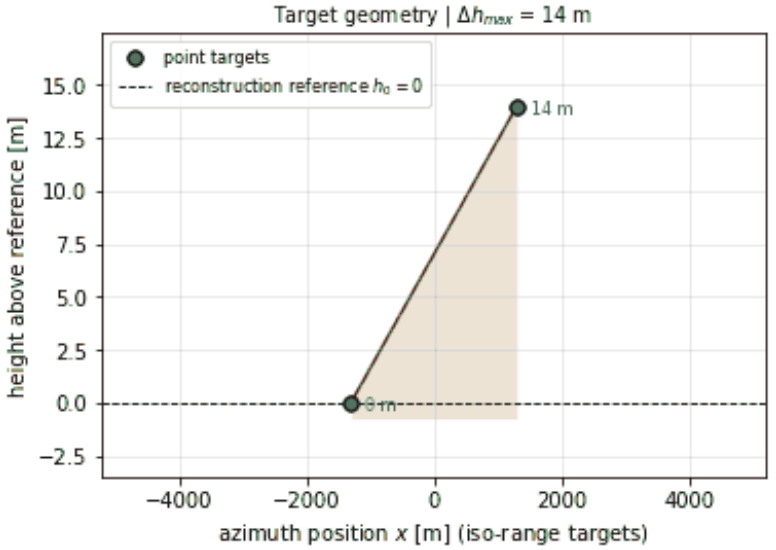



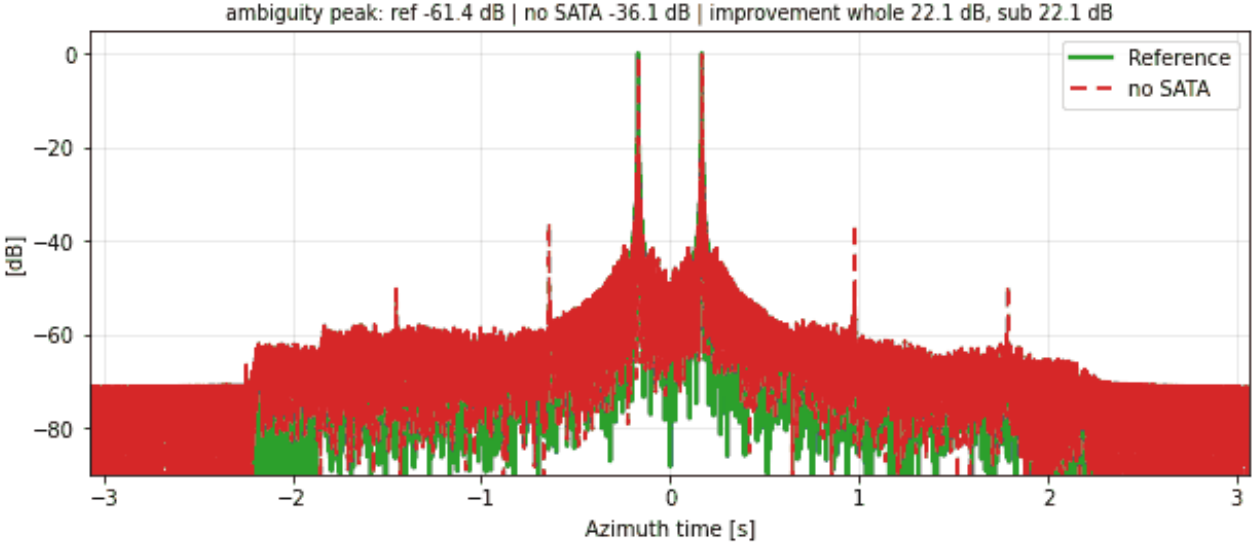



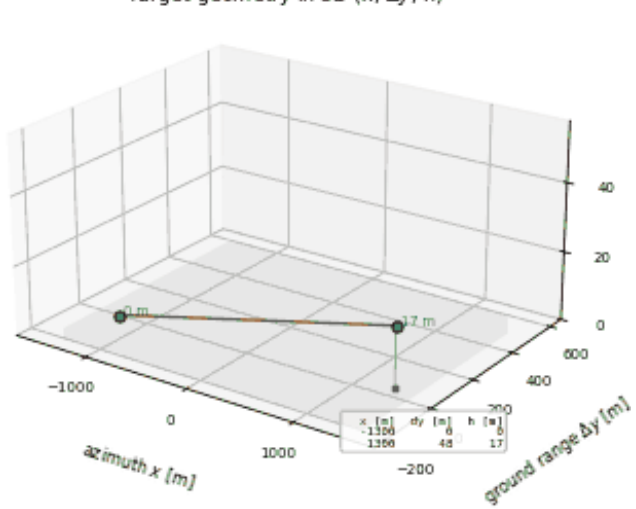



RA-NN-007 | SATA 1D | along-track ramp: N = 2, $\alpha = 5^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

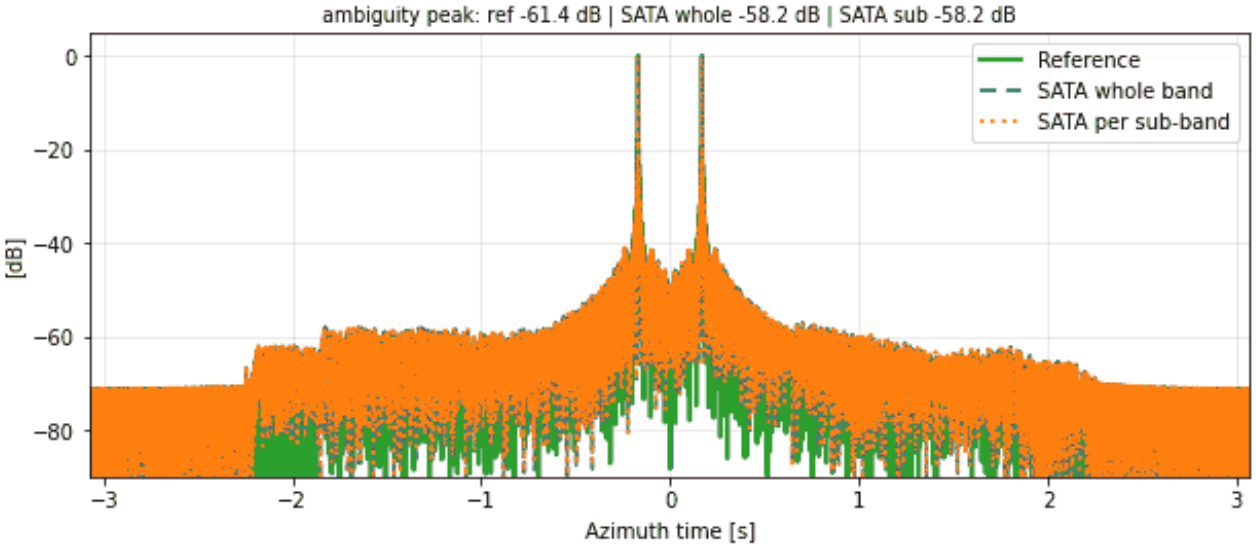


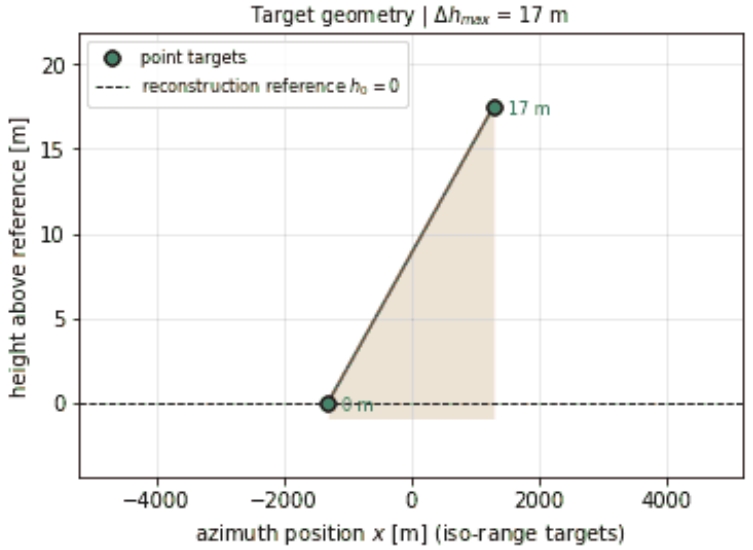



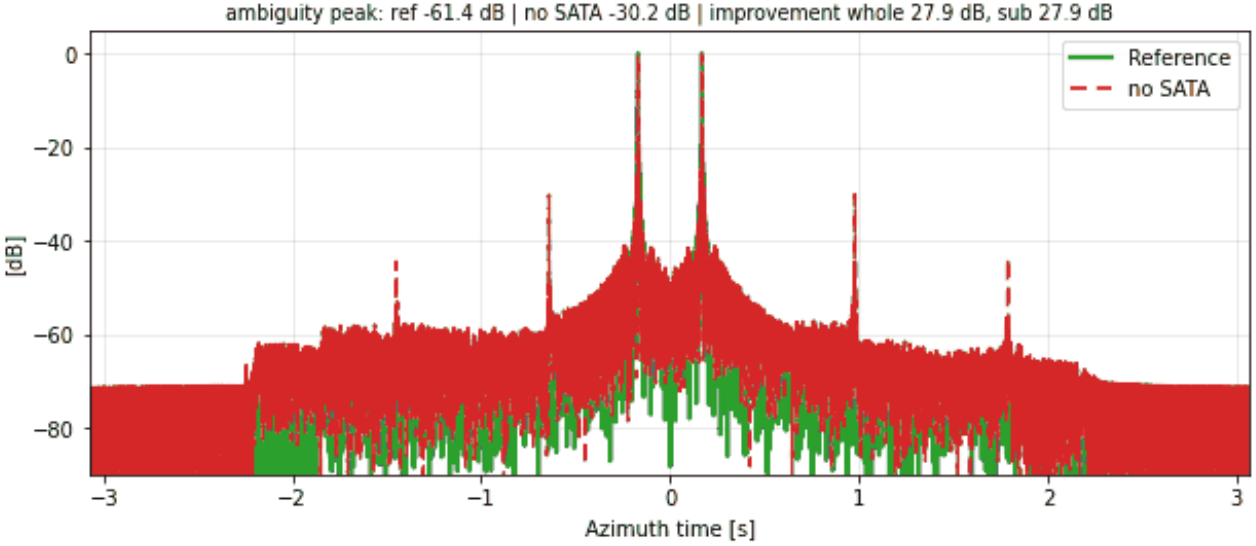



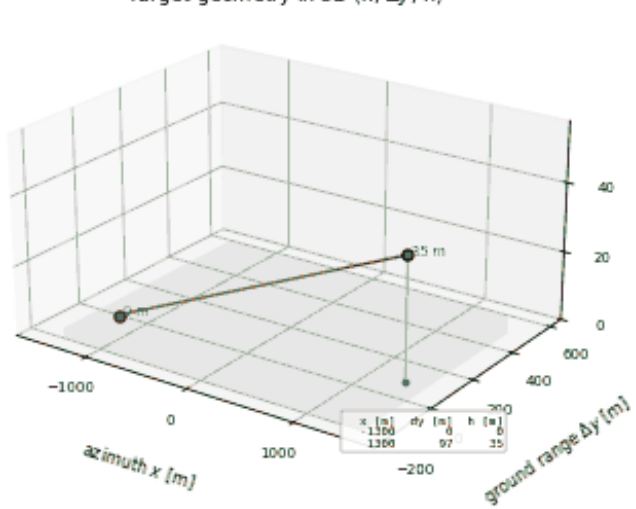



RA-NN-008 | SATA 1D | along-track ramp: N = 2, $\alpha = 10^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

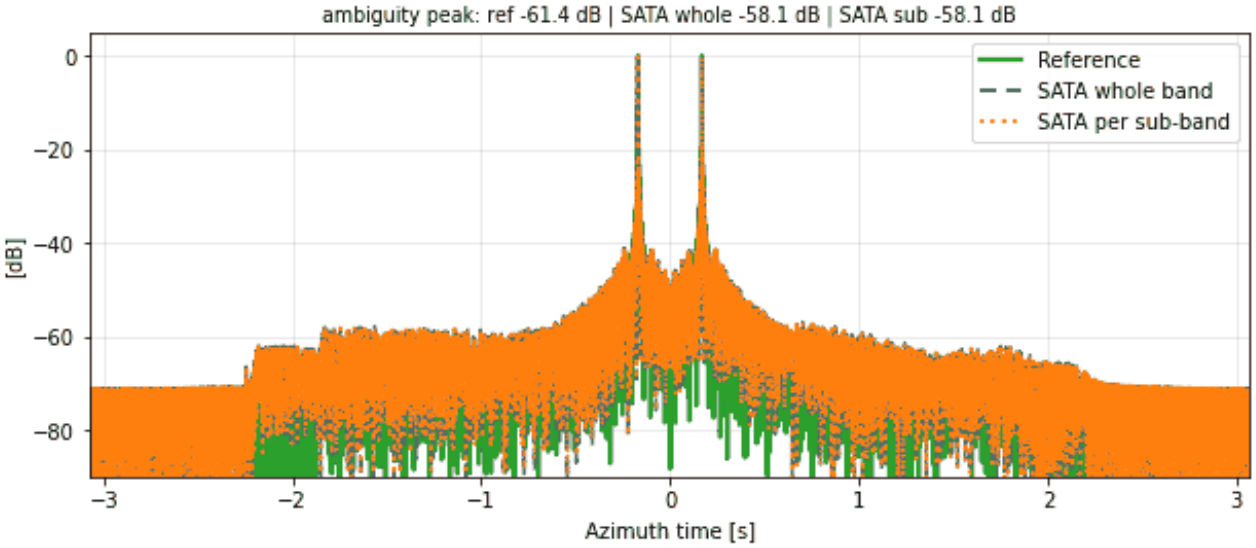


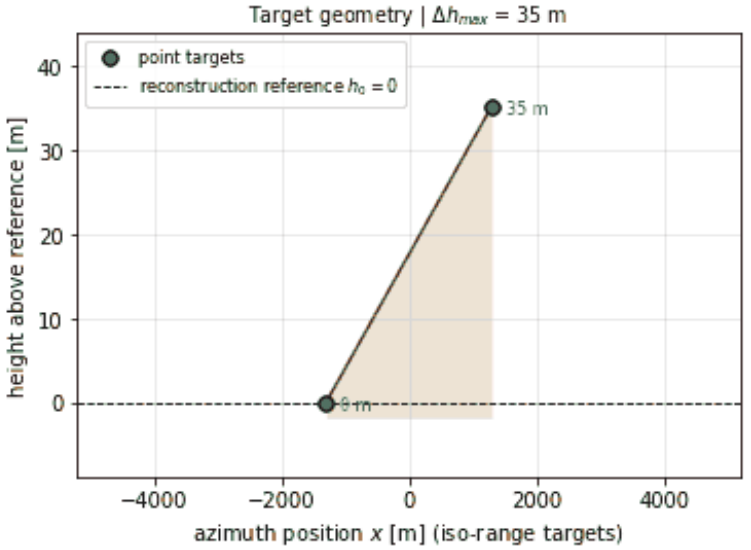



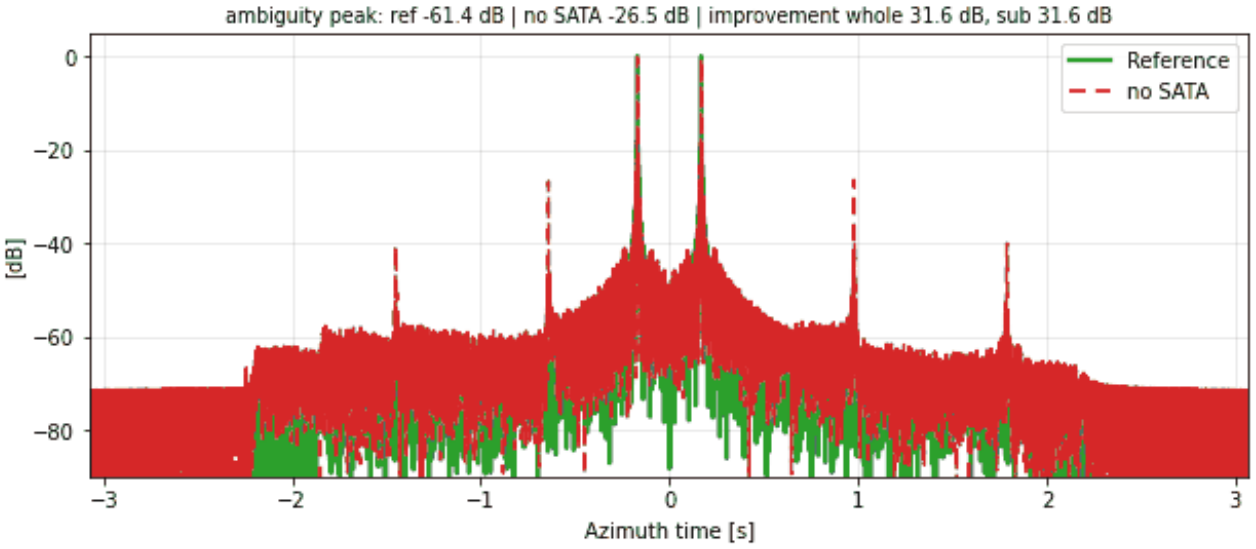



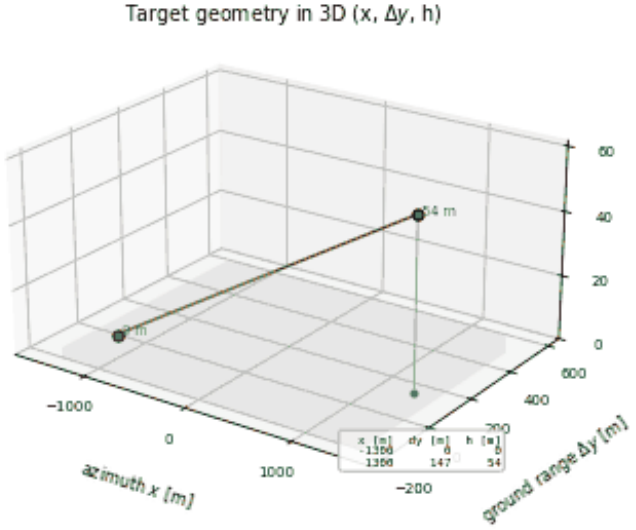



RA-NN-009 | SATA 1D | along-track ramp: N = 2, $\alpha = 15^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

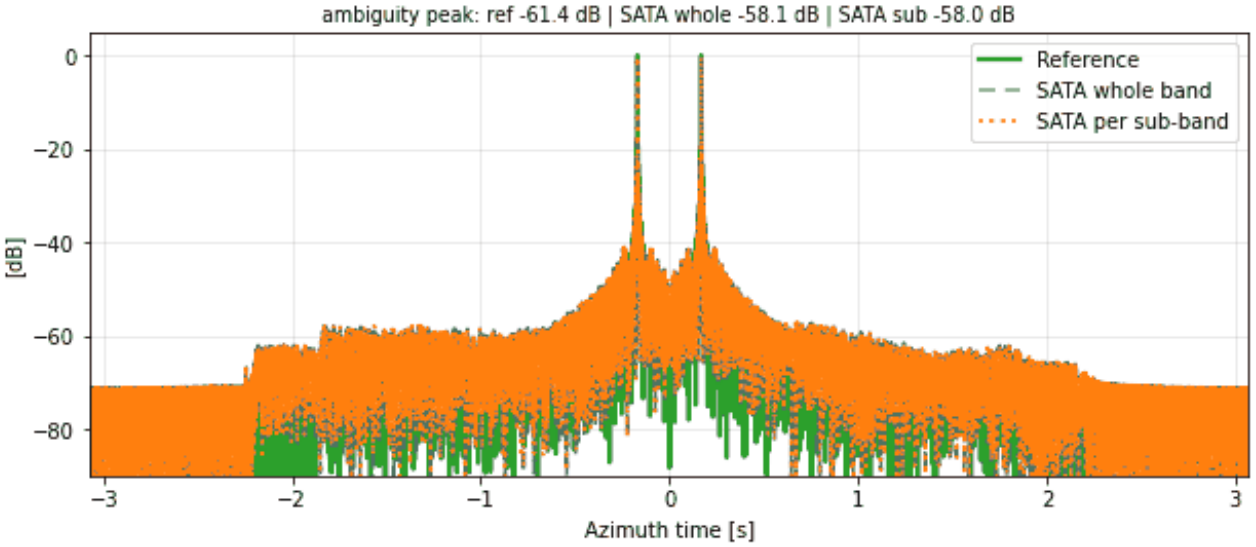


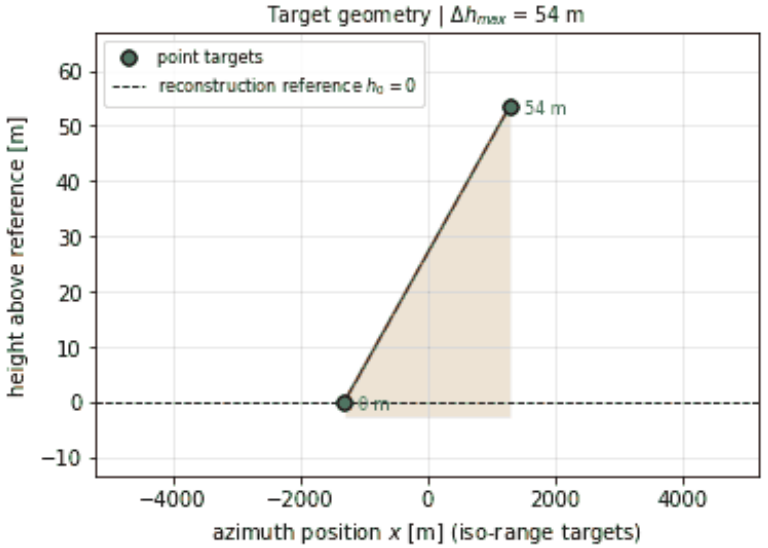



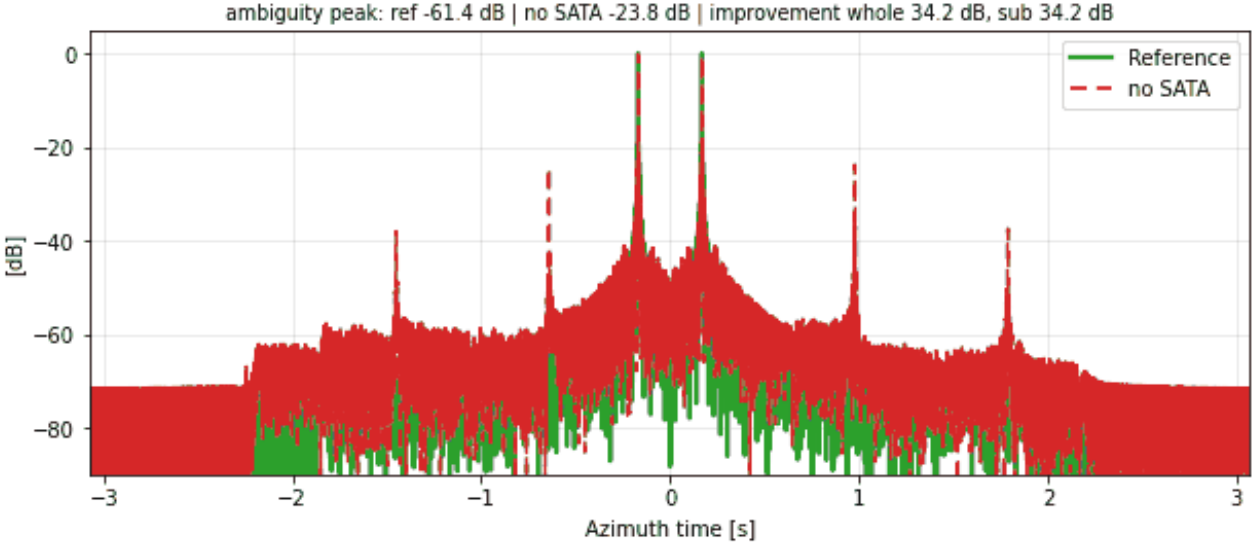



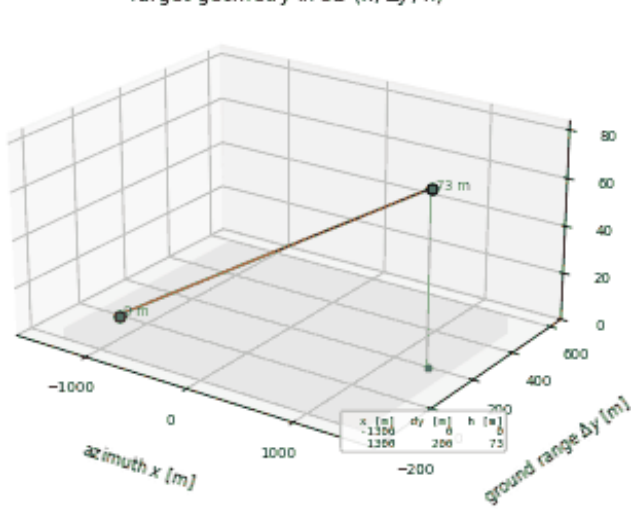



RA-NN-010 | SATA 1D | along-track ramp: N = 2, $\alpha = 20^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

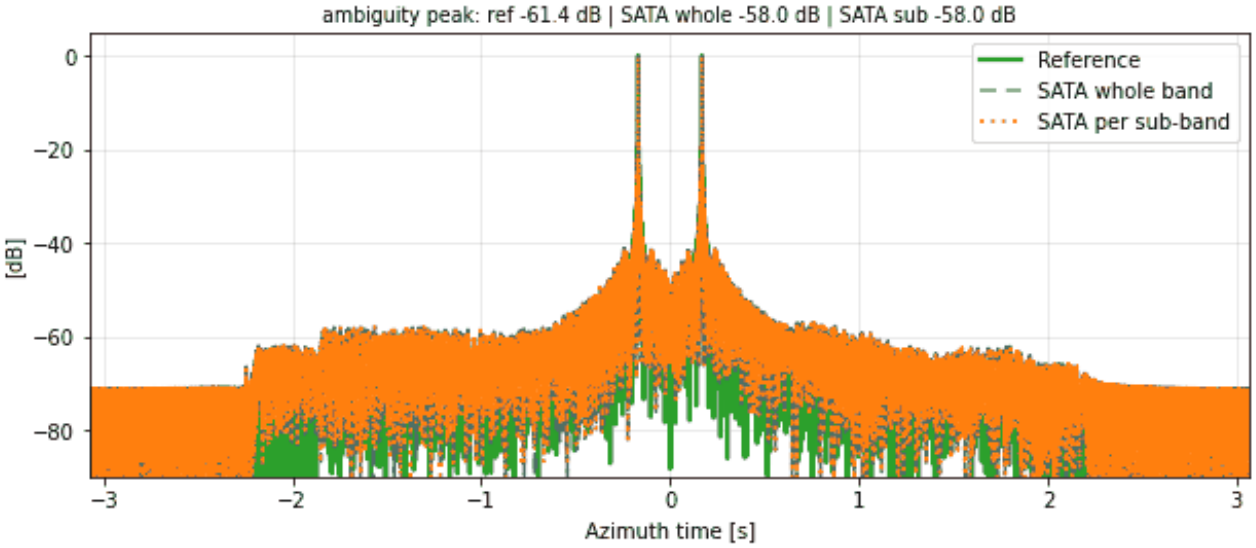

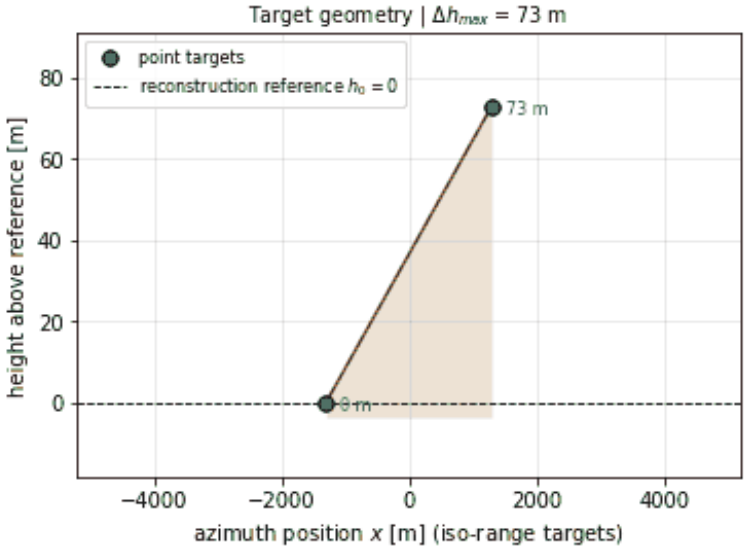



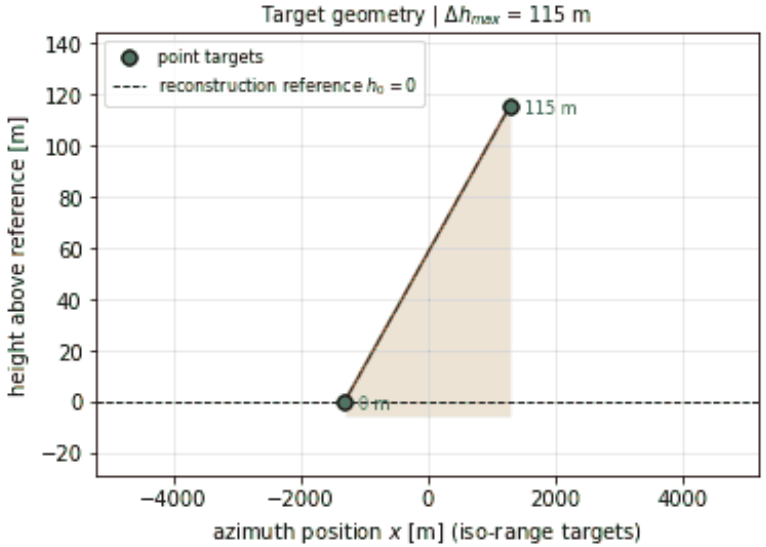



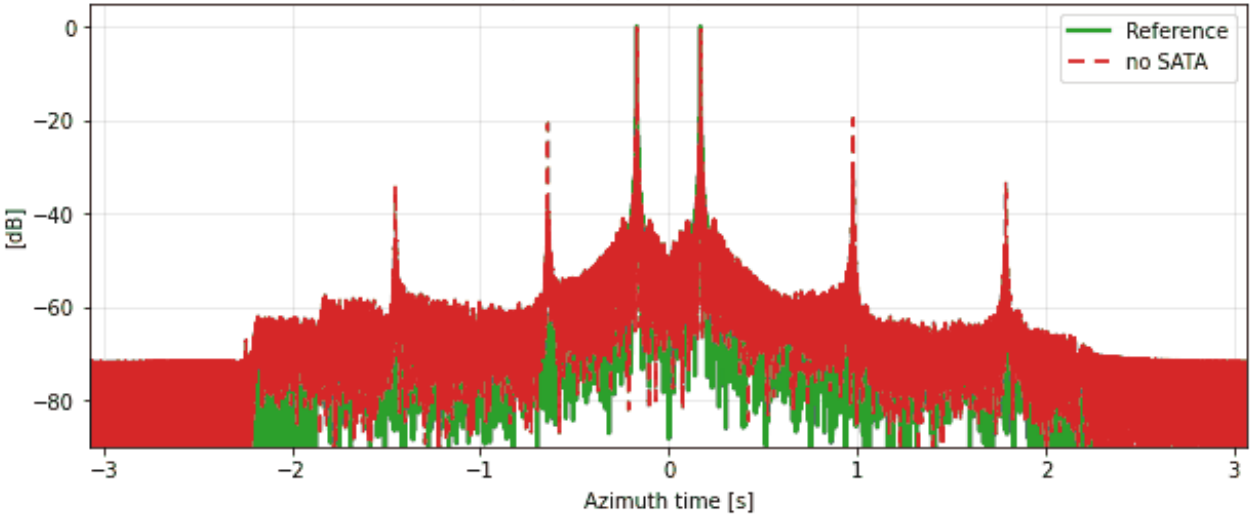

306


RA-NN-011 | SATA 1D | along-track ramp: N = 2, $\alpha = 30^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

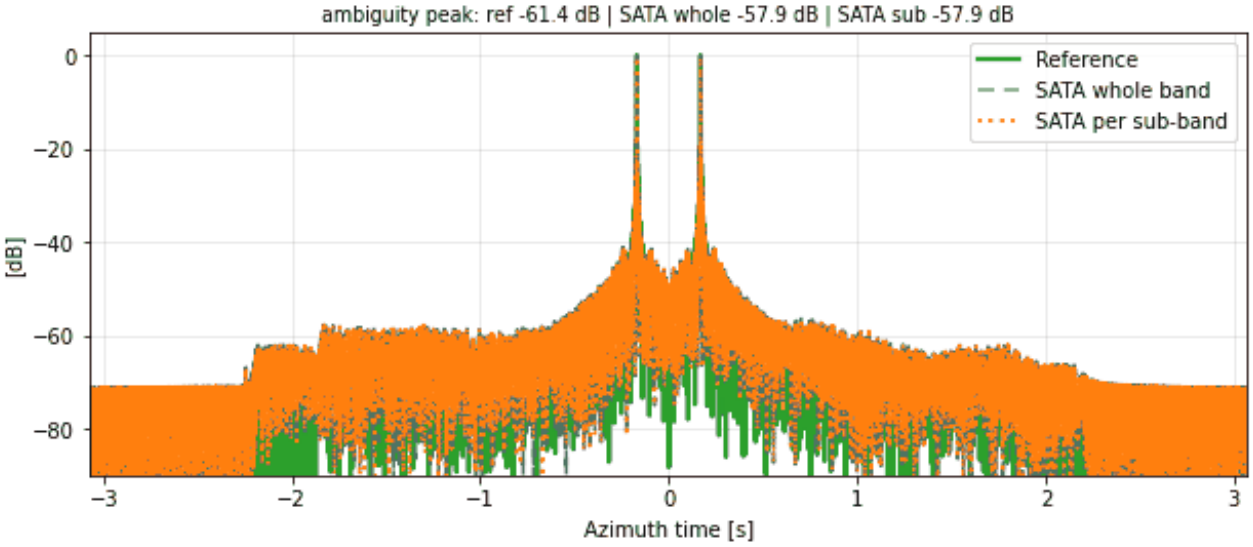






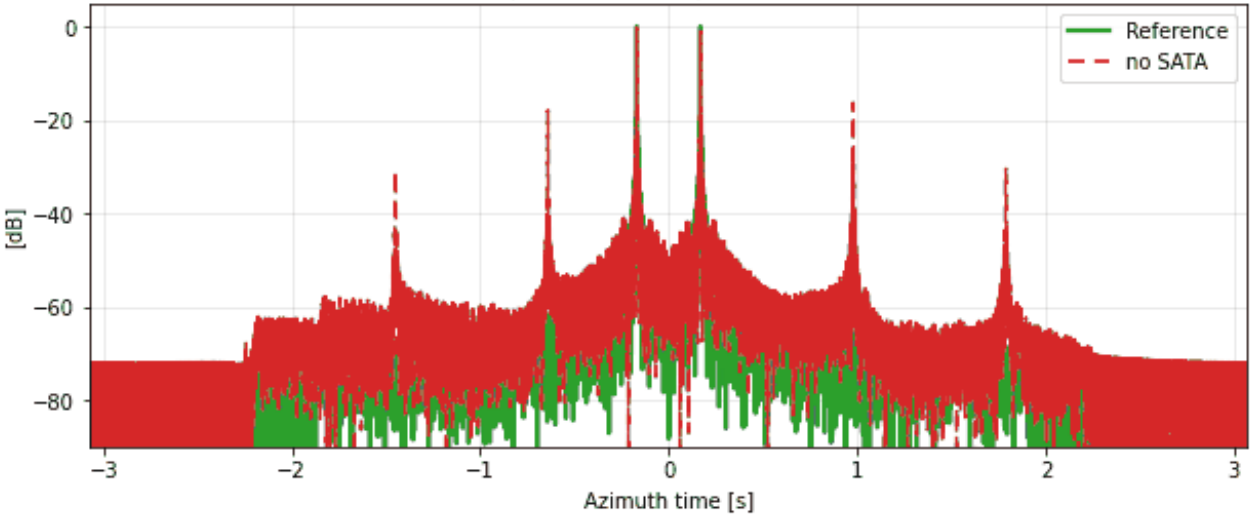


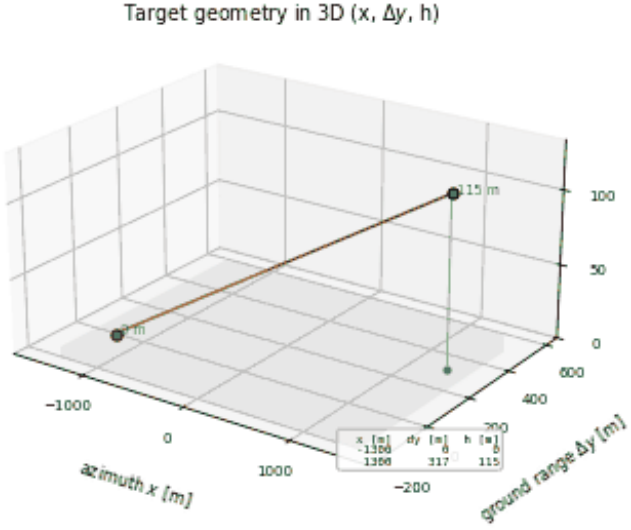
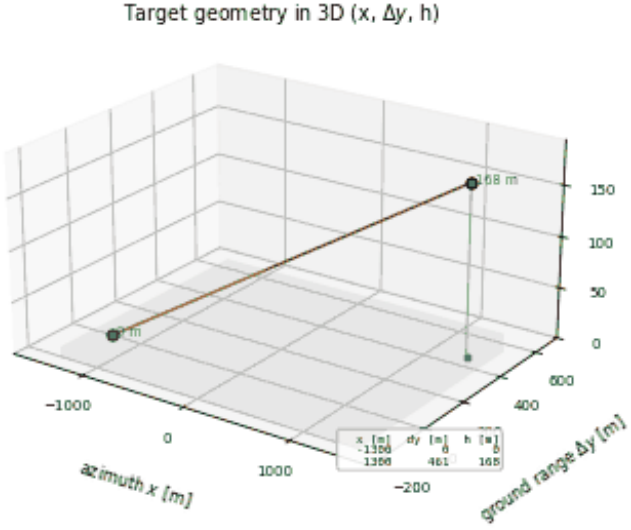



RA-NN-012 | SATA 1D | along-track ramp: N = 2, $\alpha = 40^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

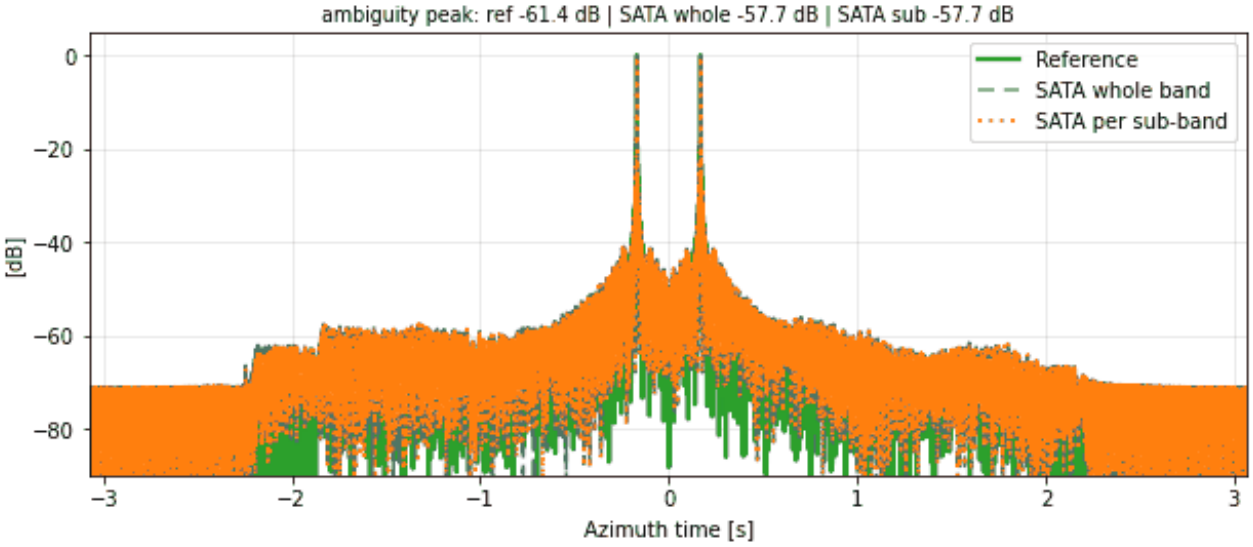


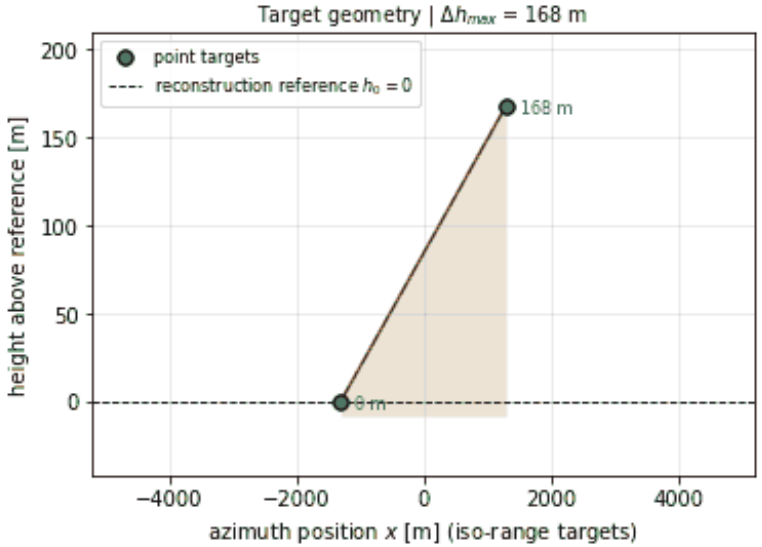



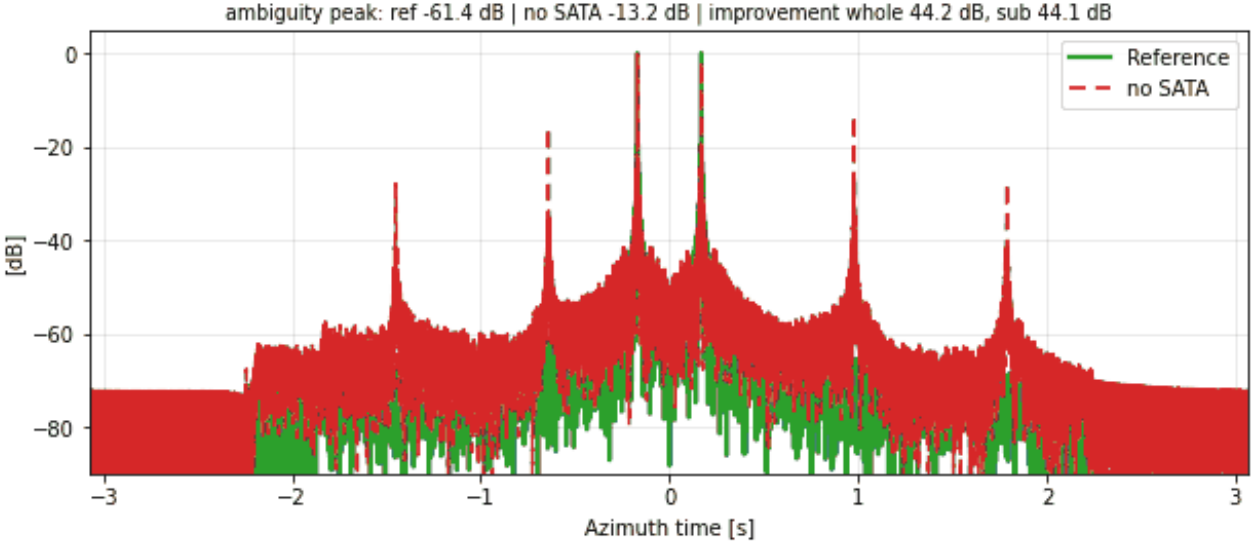



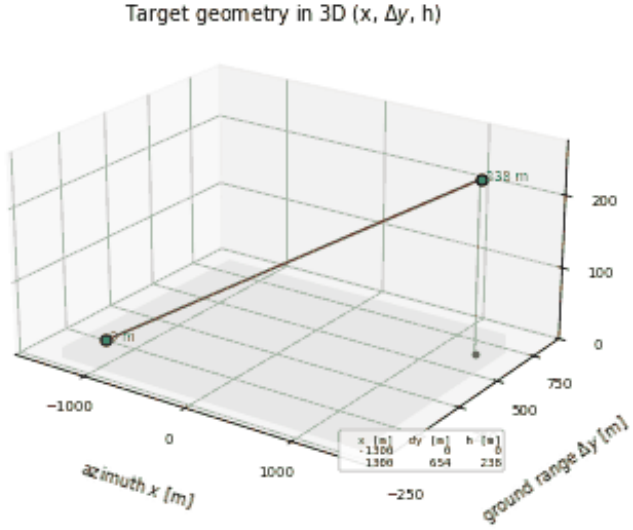



RA-NN-013 | SATA 1D | along-track ramp: N = 2, $\alpha = 50^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

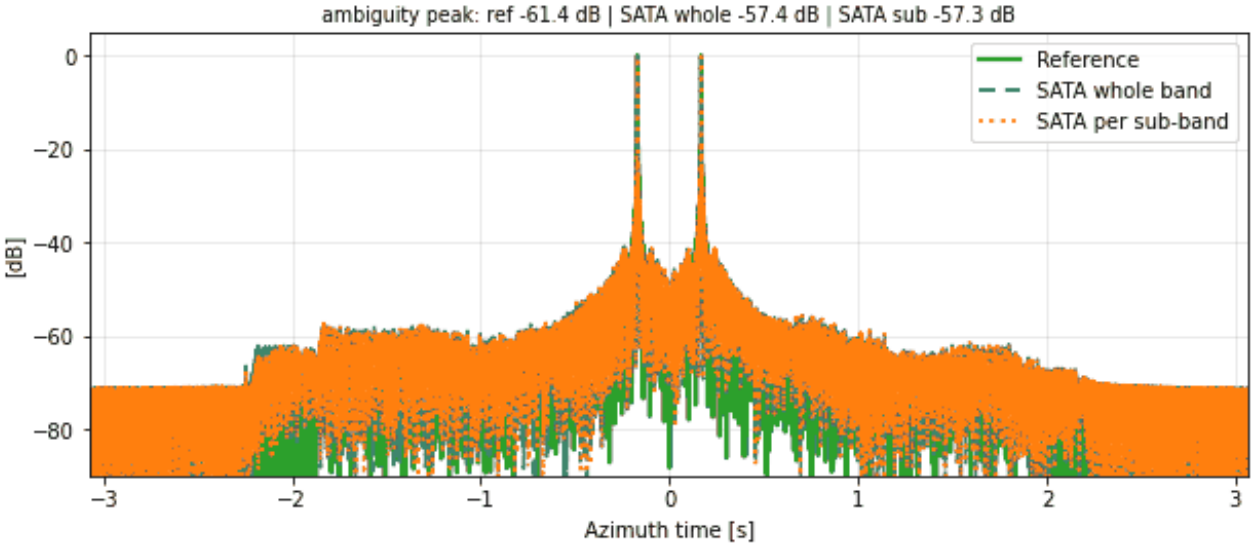

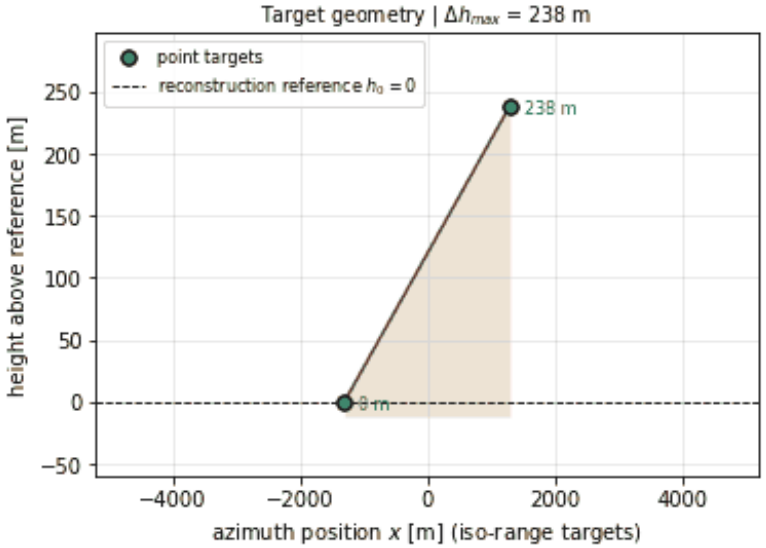



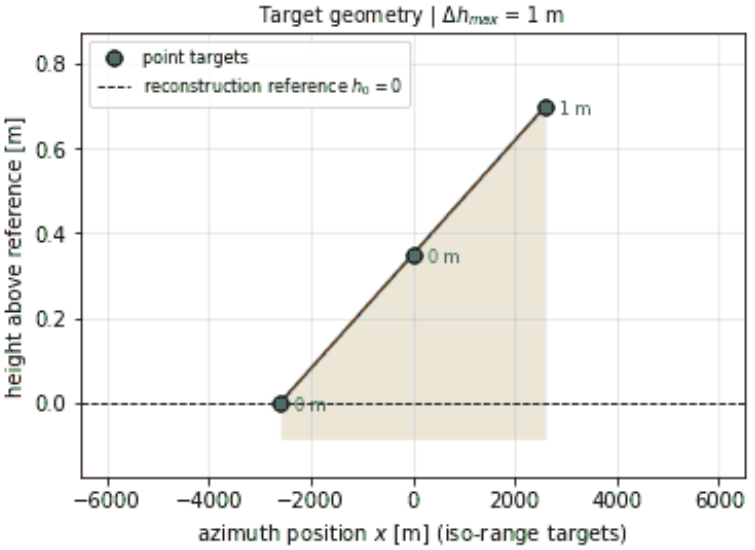




309


RA-NN-014 | SATA 1D | along-track ramp: N = 3, $\alpha = 0.1^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

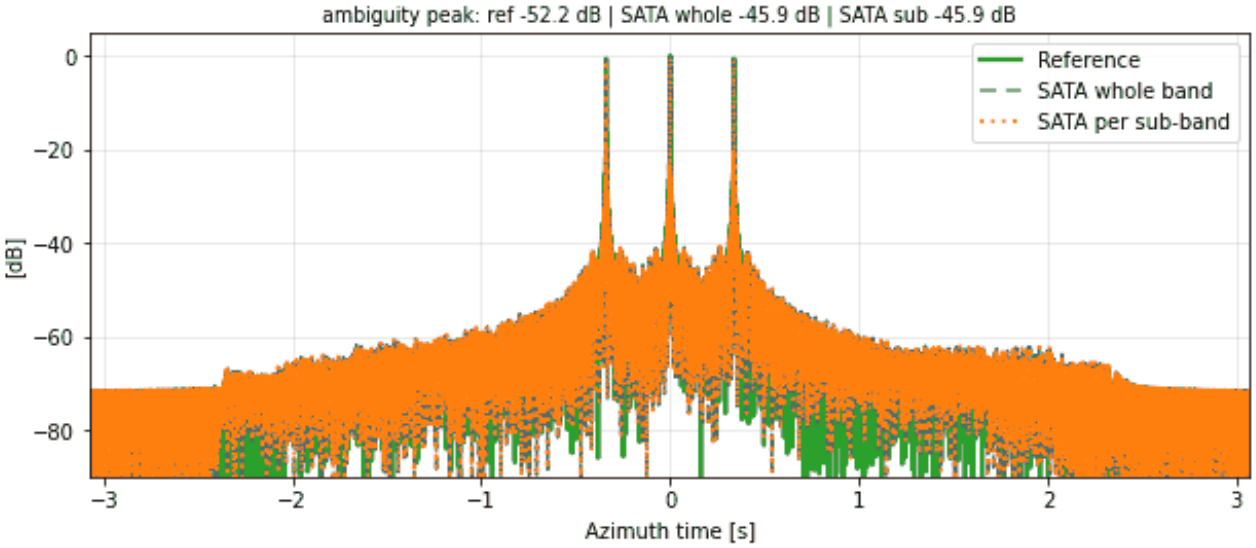





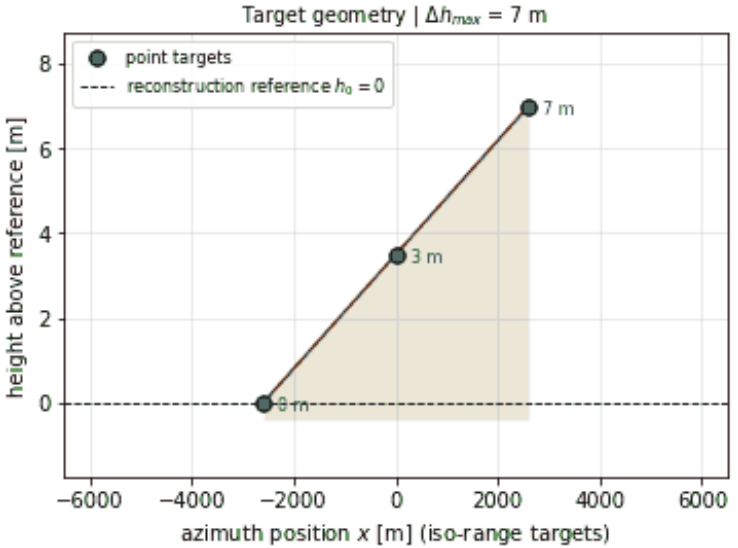




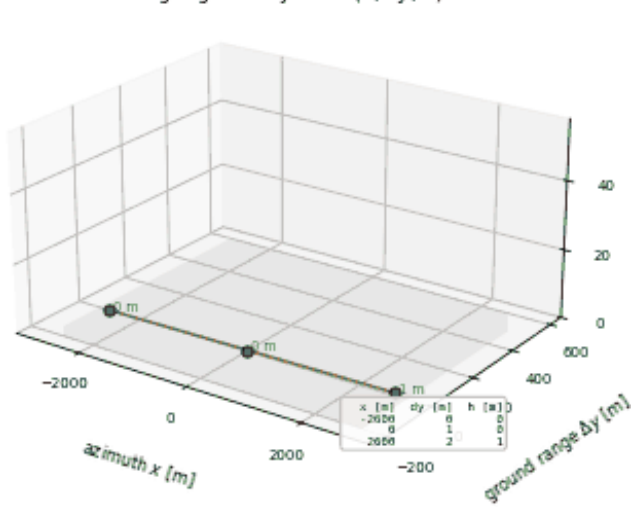


RA-NN-015 | SATA 1D | along-track ramp: N = 3, $\alpha = 1^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

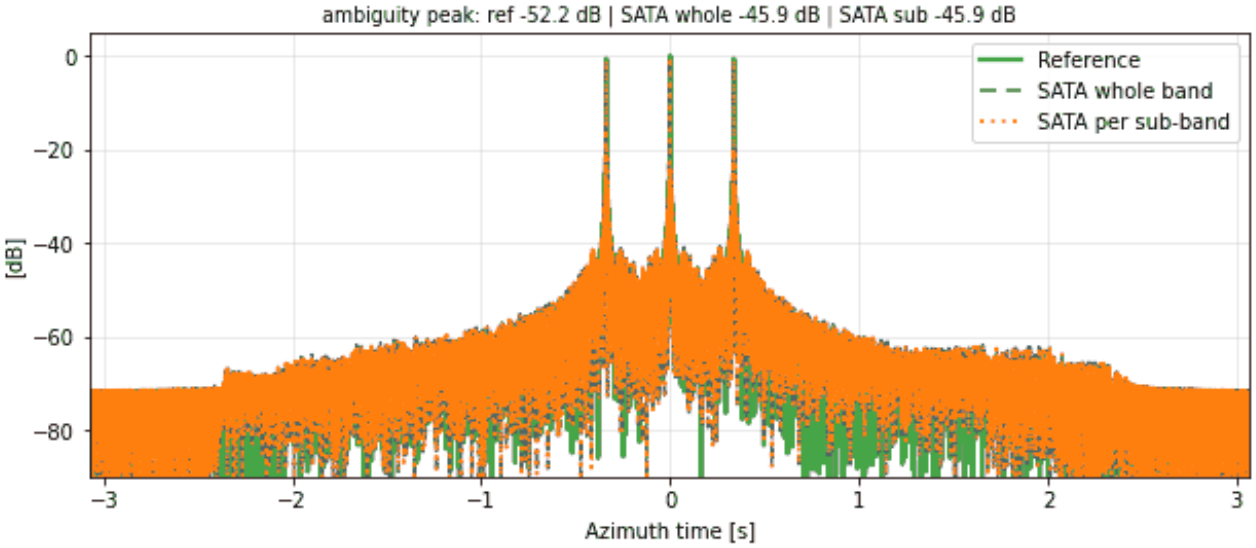





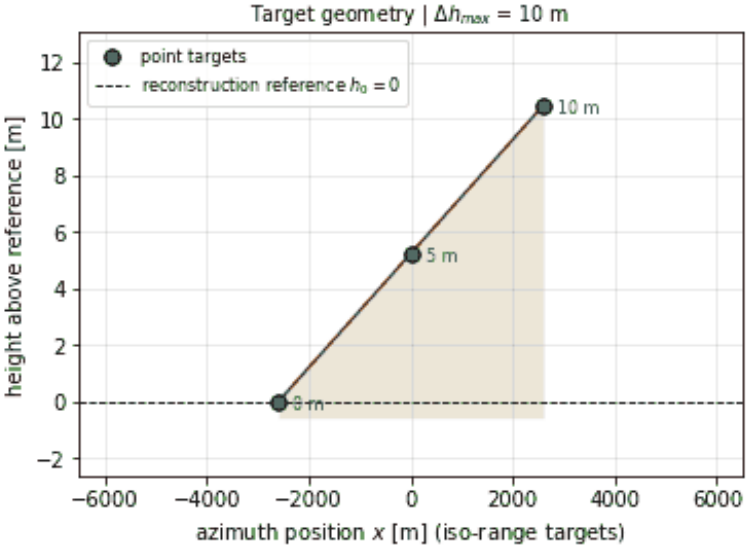





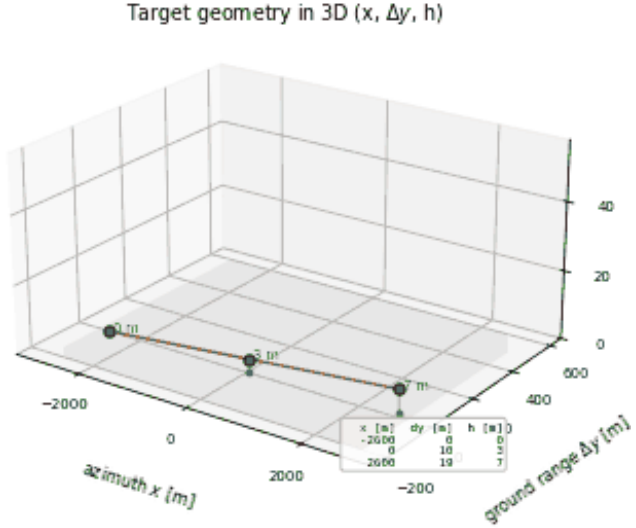


RA-NN-016 | SATA 1D | along-track ramp: N = 3, $\alpha = 1.5^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

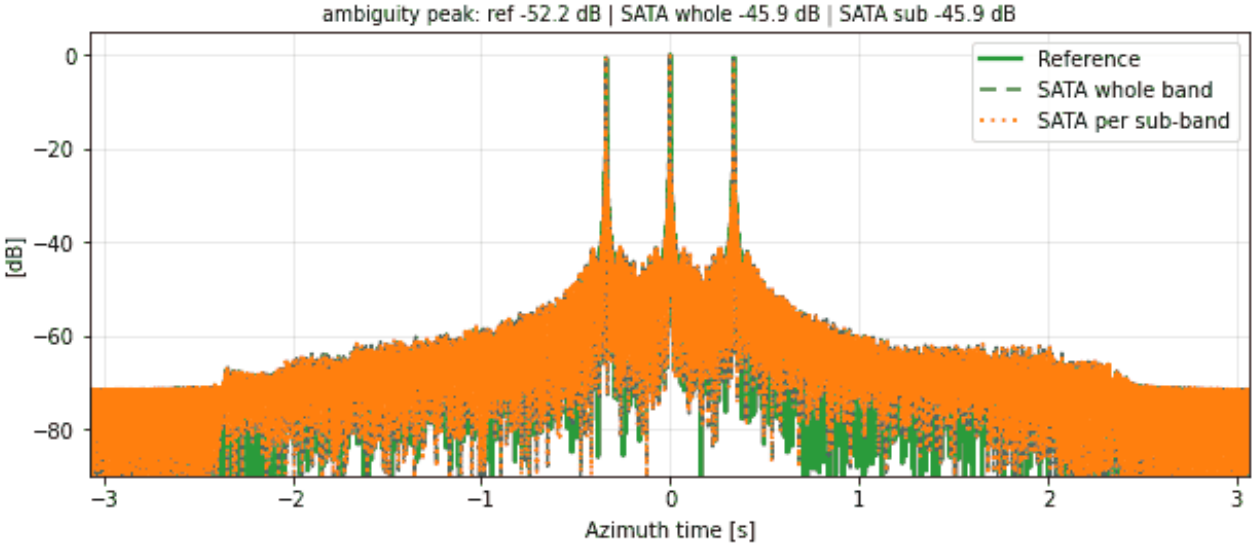


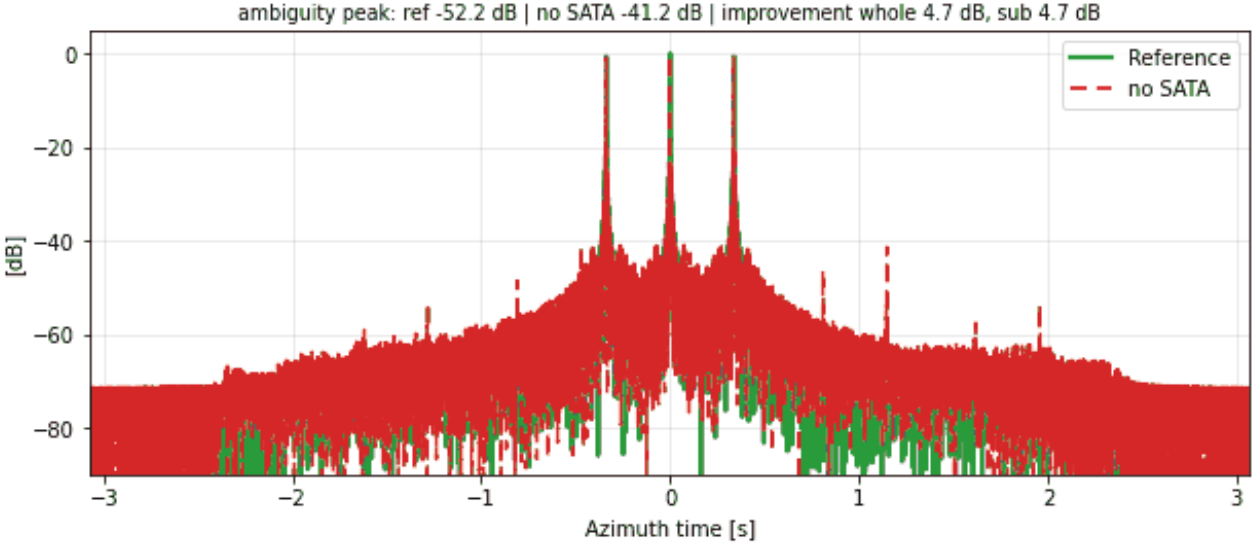



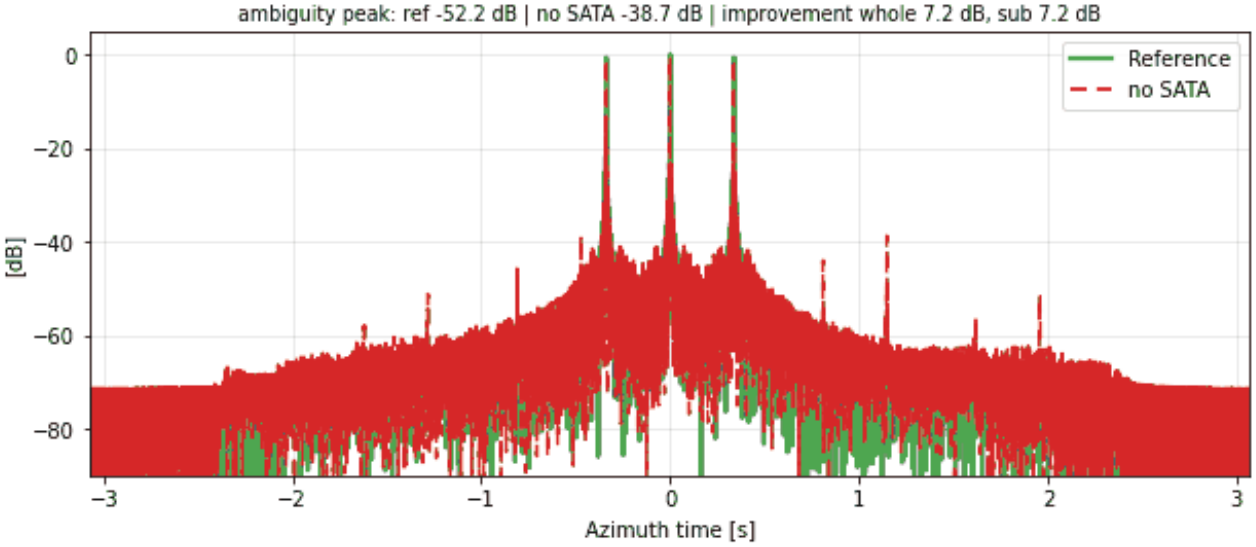


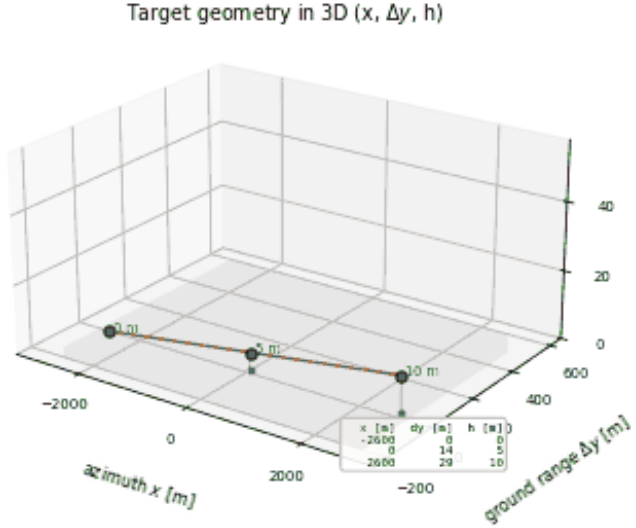
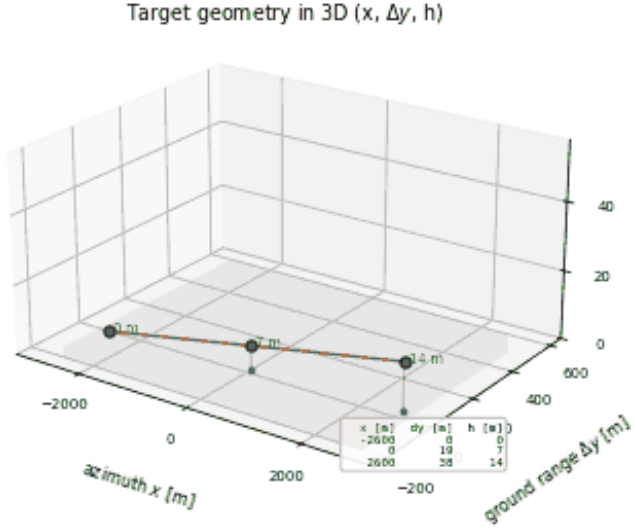



RA-NN-017 | SATA 1D | along-track ramp: N = 3, $\alpha = 2^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

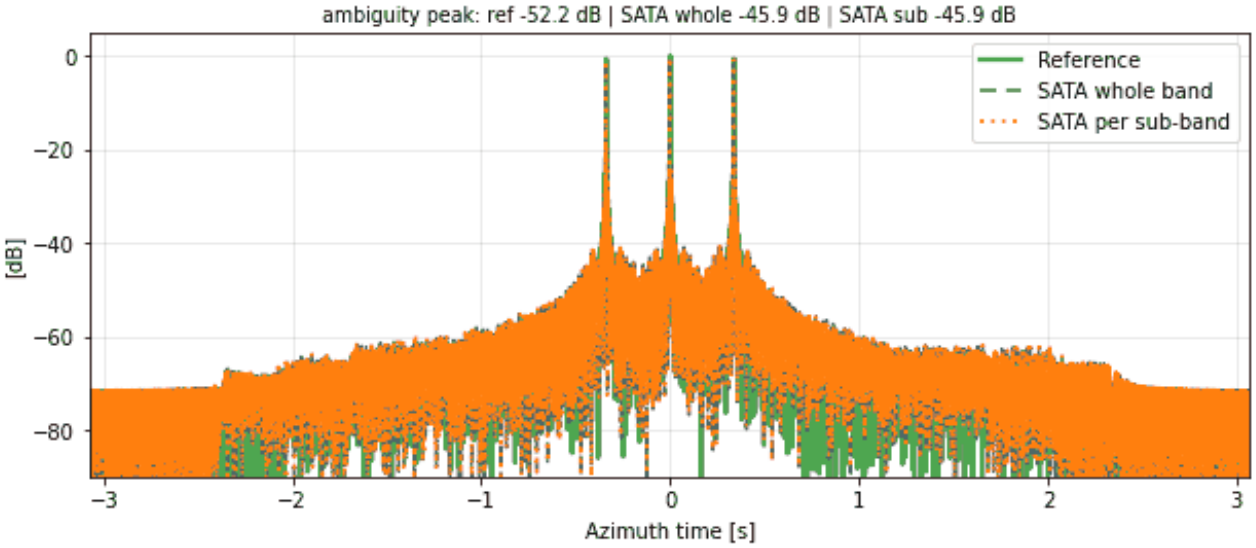


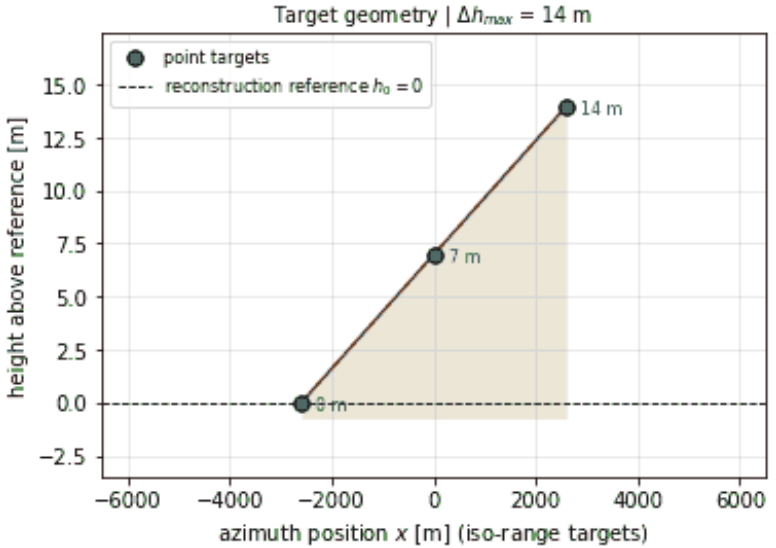



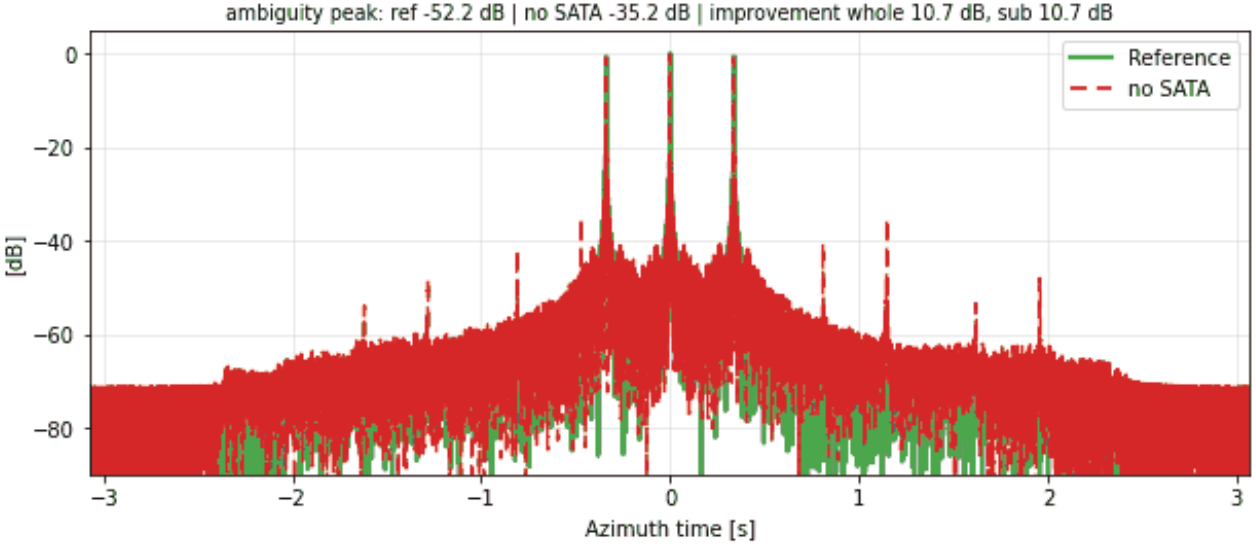



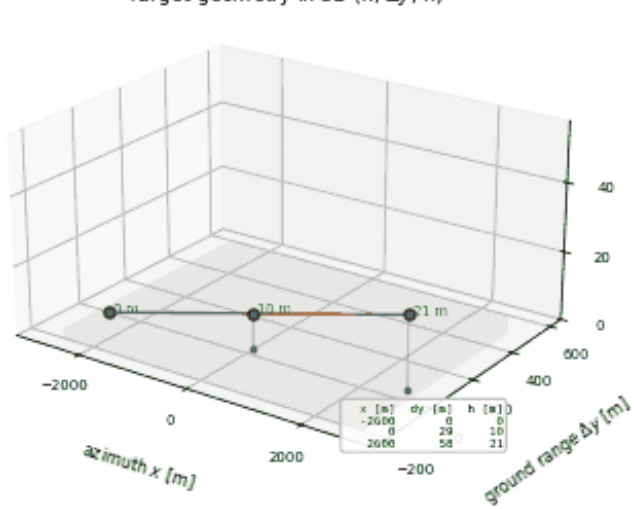



RA-NN-018 | SATA 1D | along-track ramp: N = 3, $\alpha = 3°$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

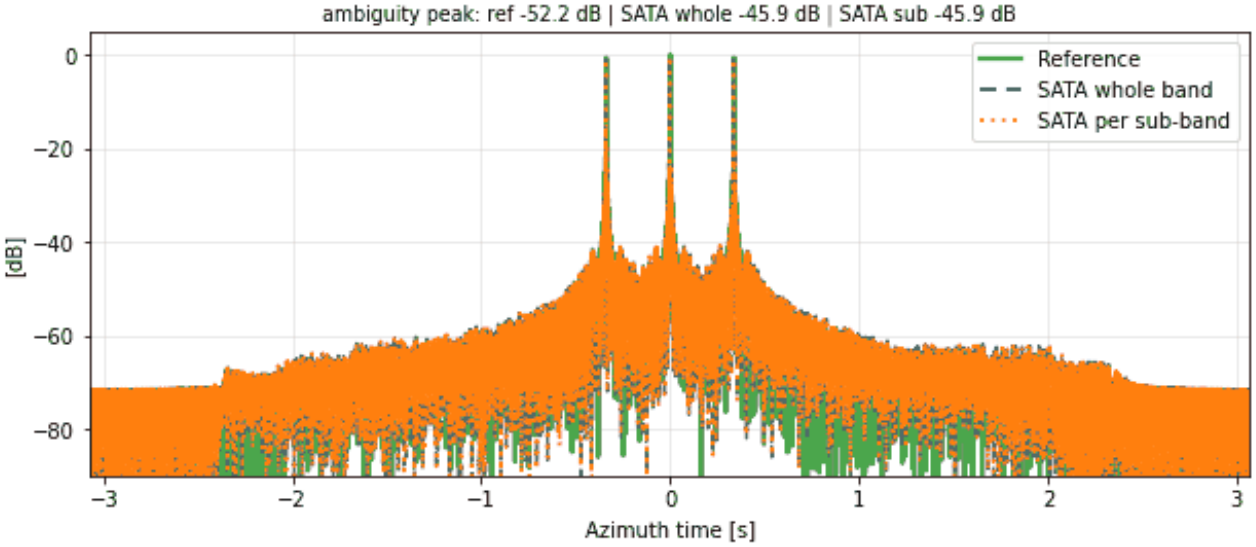


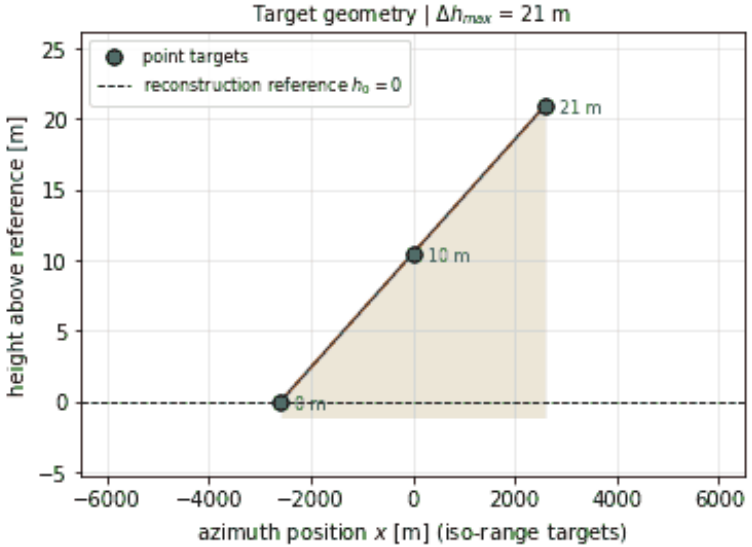



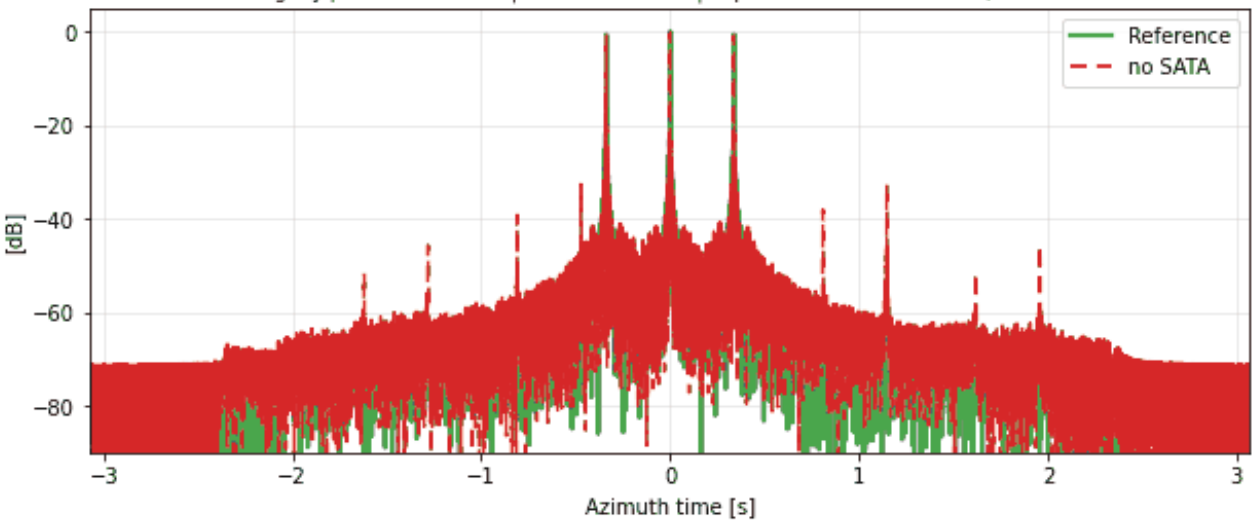



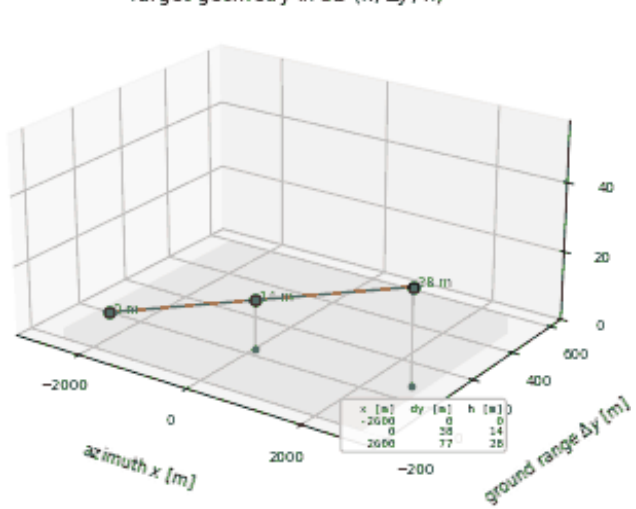



RA-NN-019 | SATA 1D | along-track ramp: N = 3, $\alpha = 4°$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

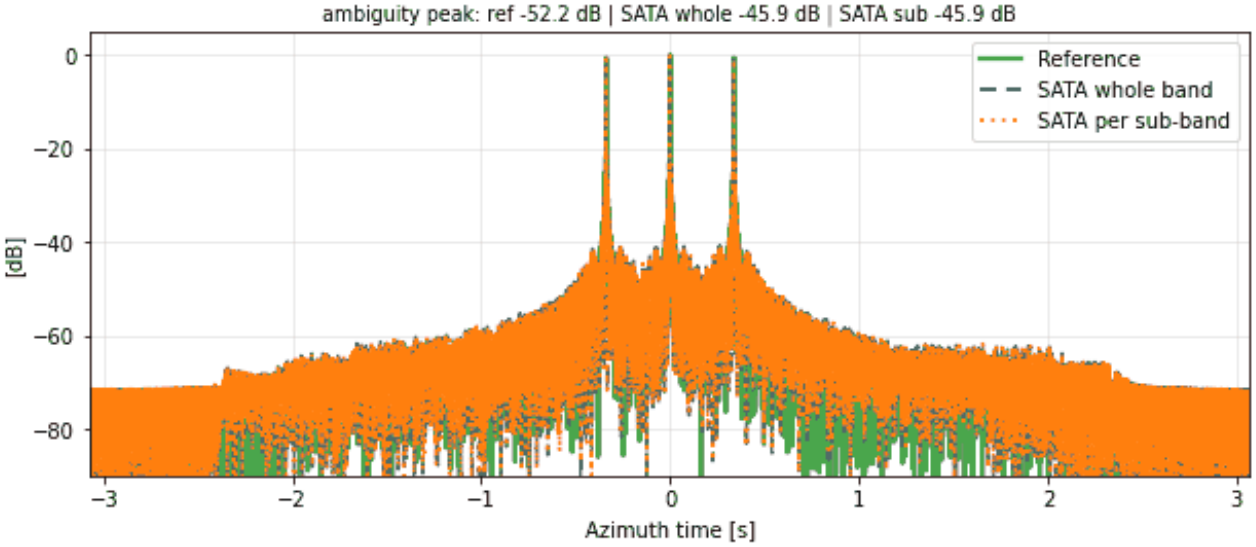


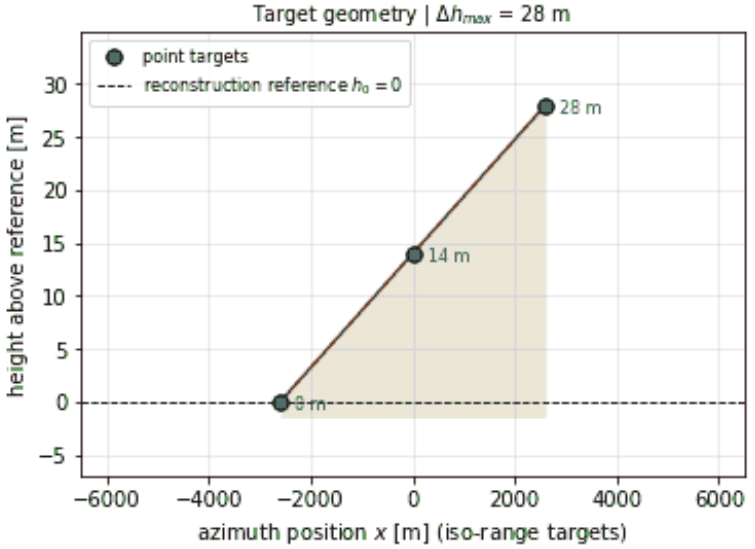



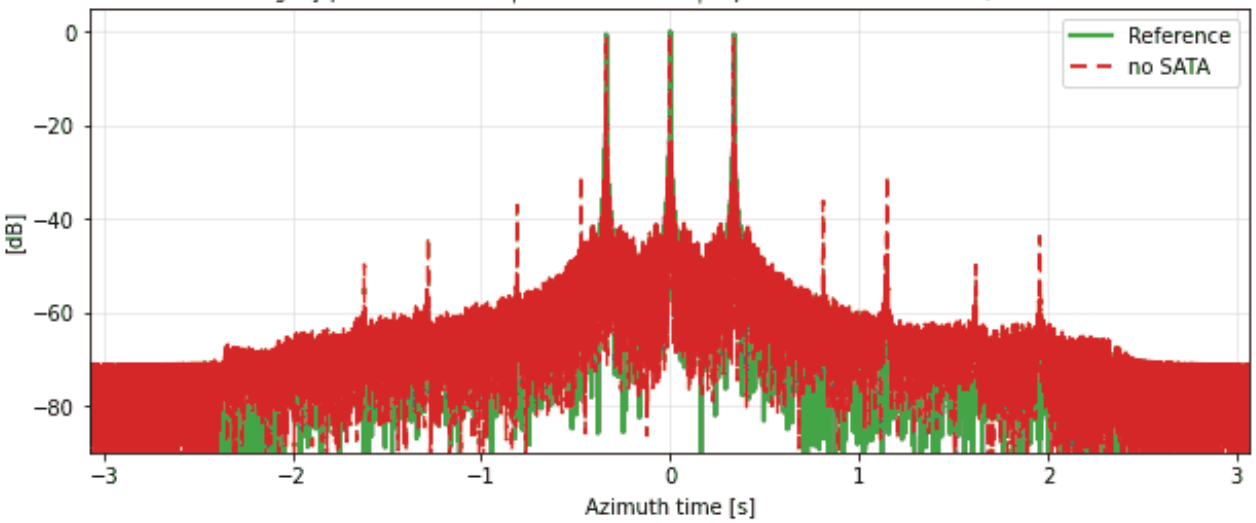



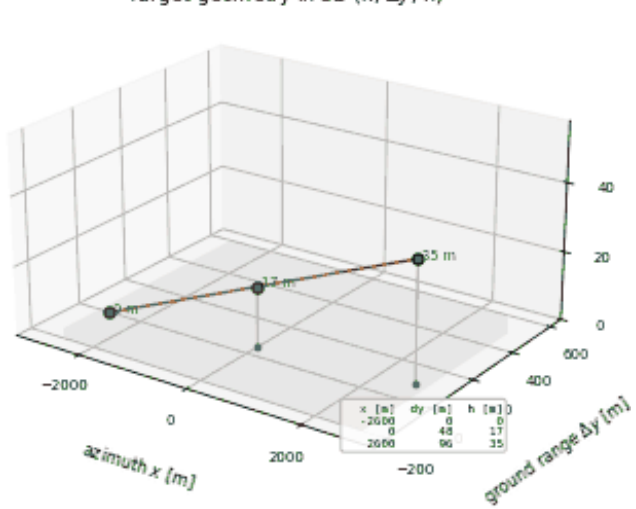



RA-NN-020 | SATA 1D | along-track ramp: N = 3, $\alpha = 5°$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

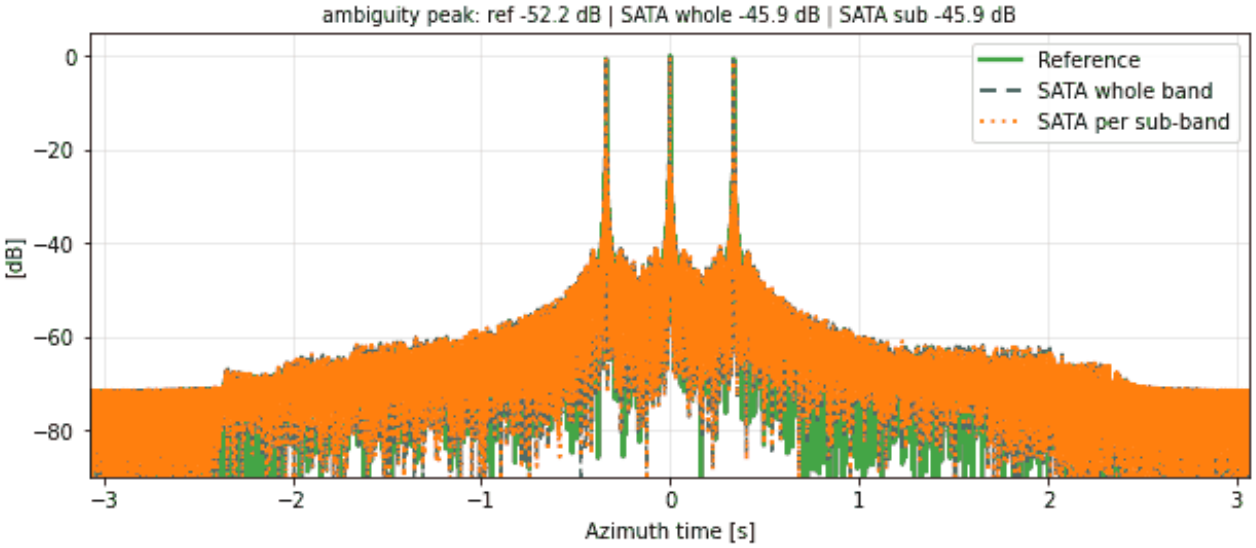


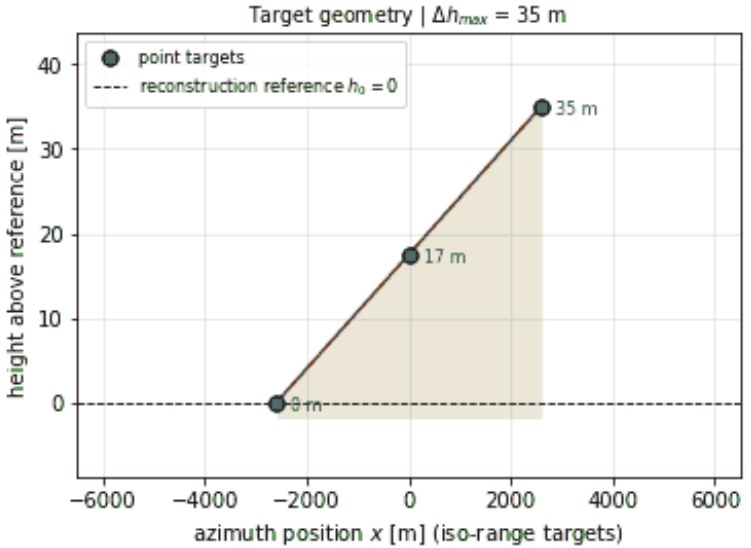



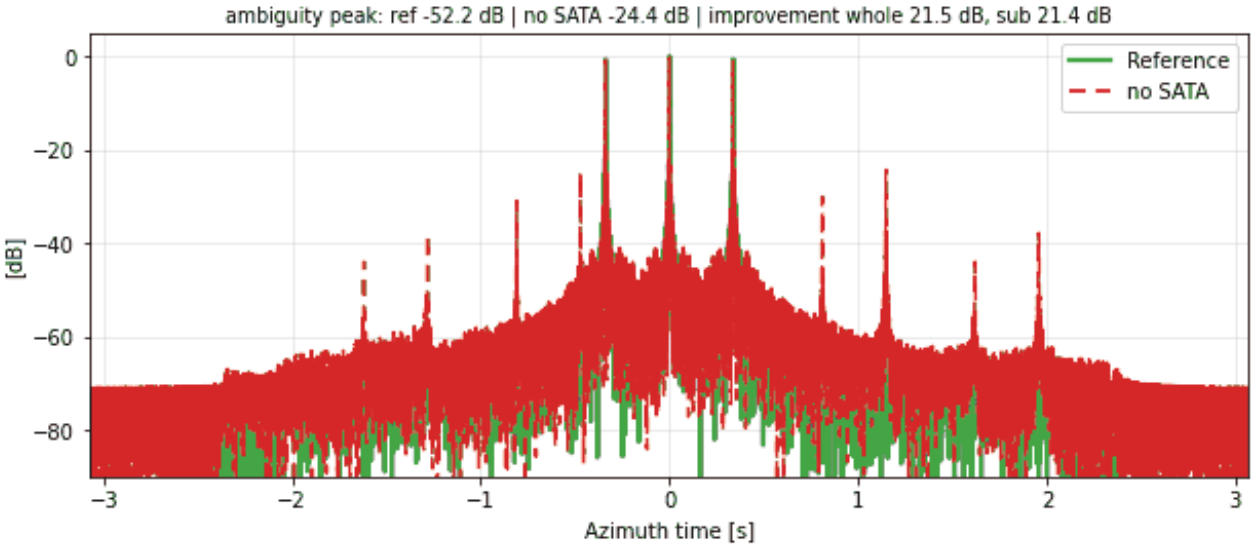



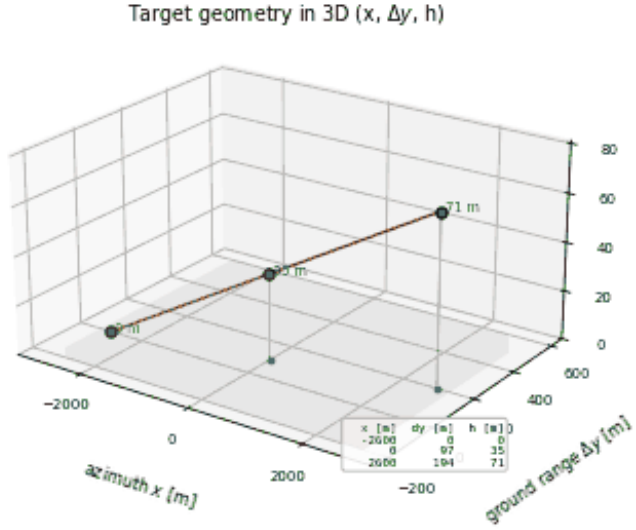



RA-NN-021 | SATA 1D | along-track ramp: N = 3, $\alpha = 10^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

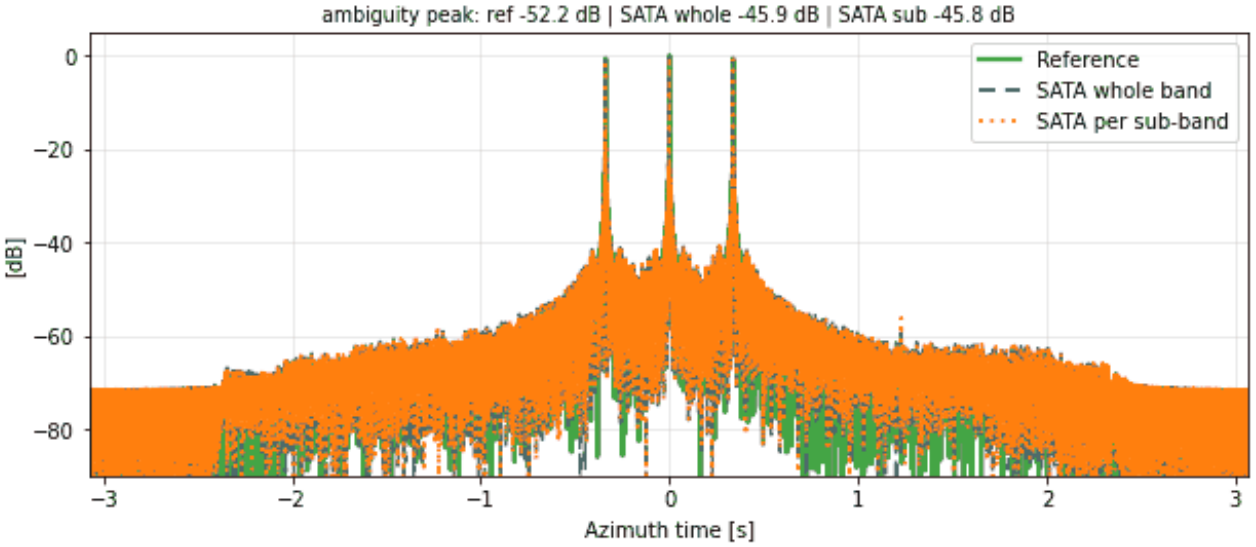


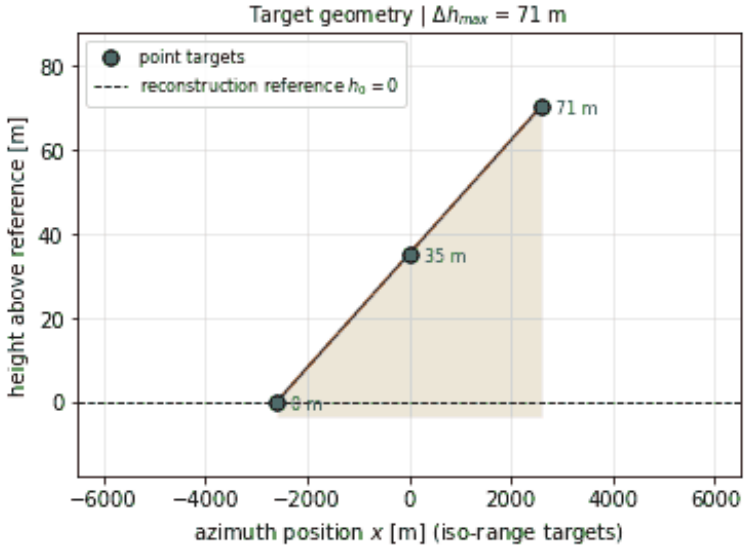



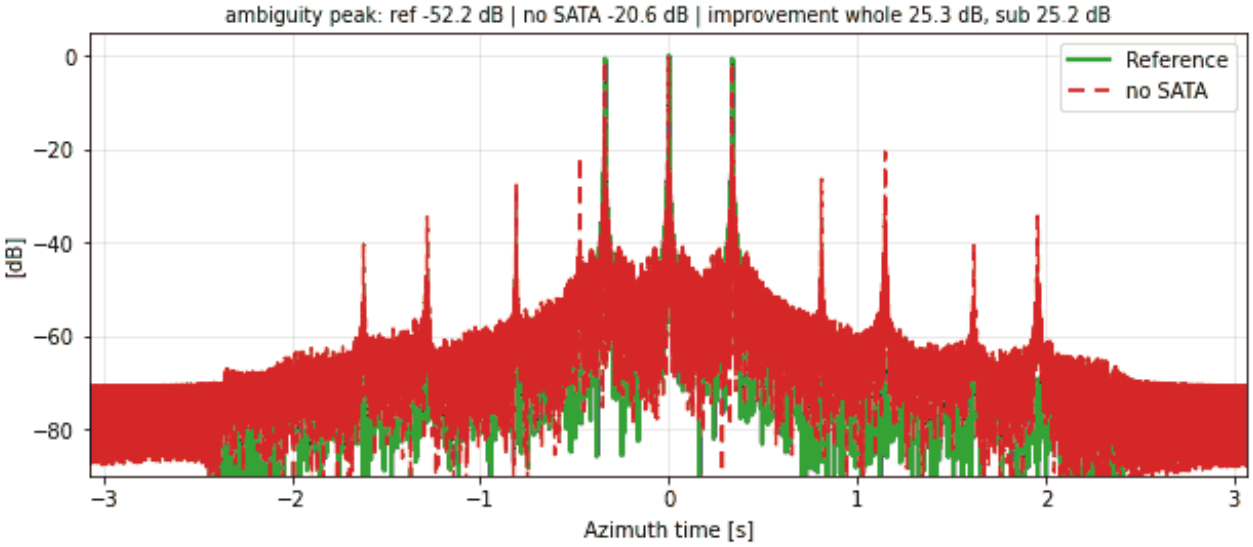



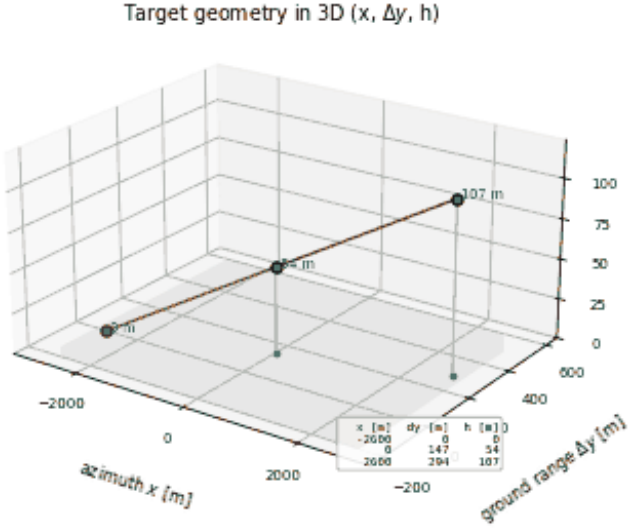



RA-NN-022 | SATA 1D | along-track ramp: N = 3, $\alpha = 15^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

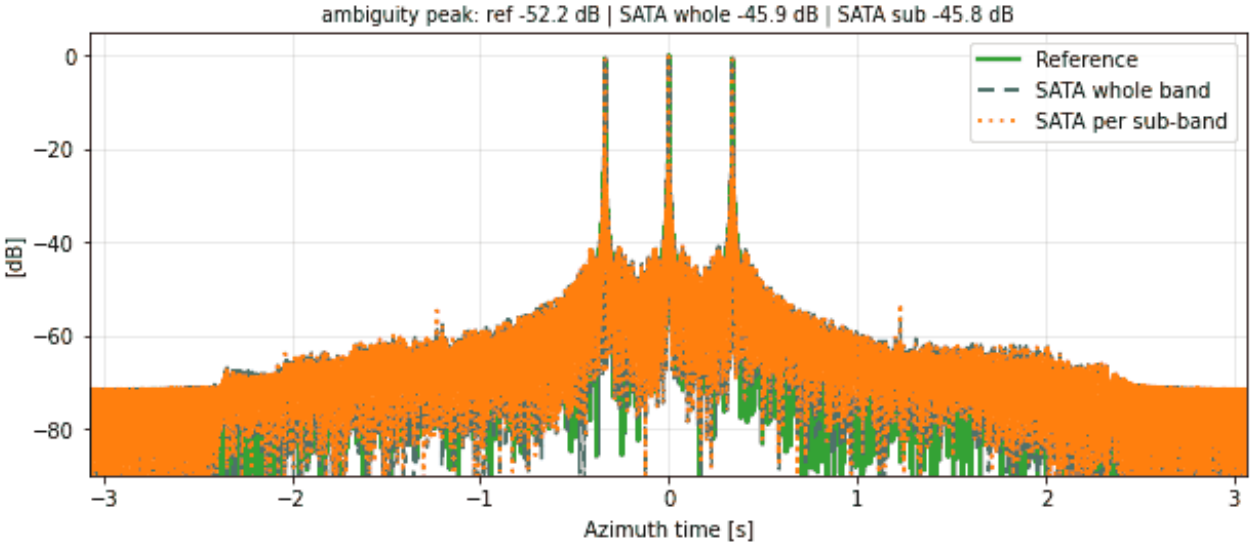


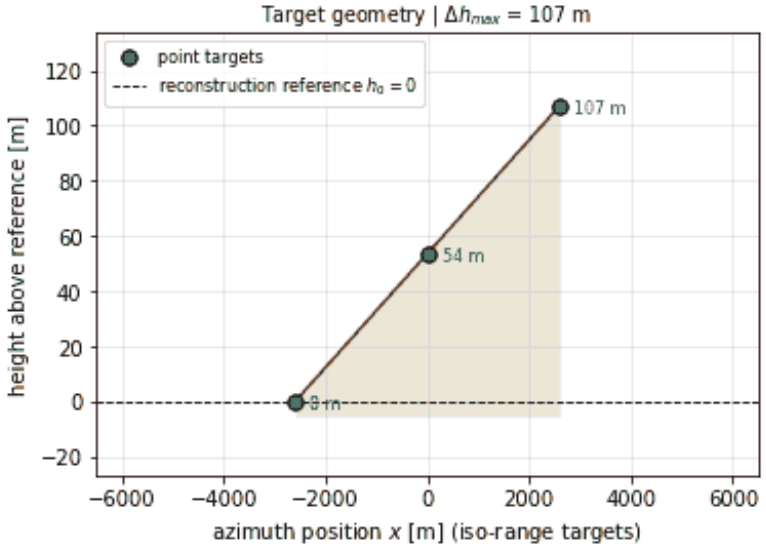



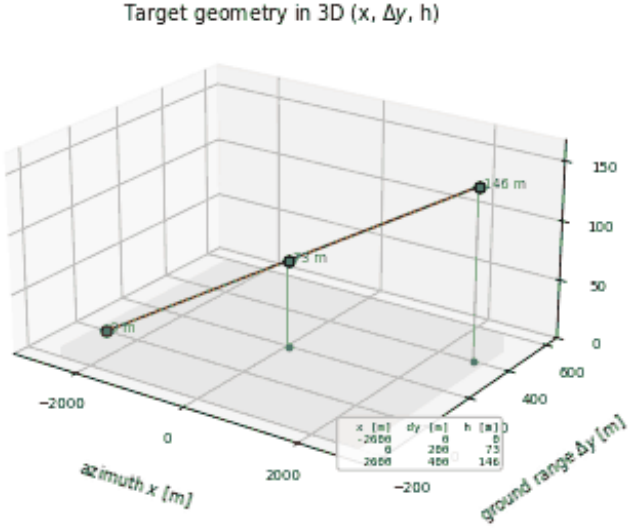
RA-NN-023 | SATA 1D | along-track ramp: N = 3, $\alpha = 20^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



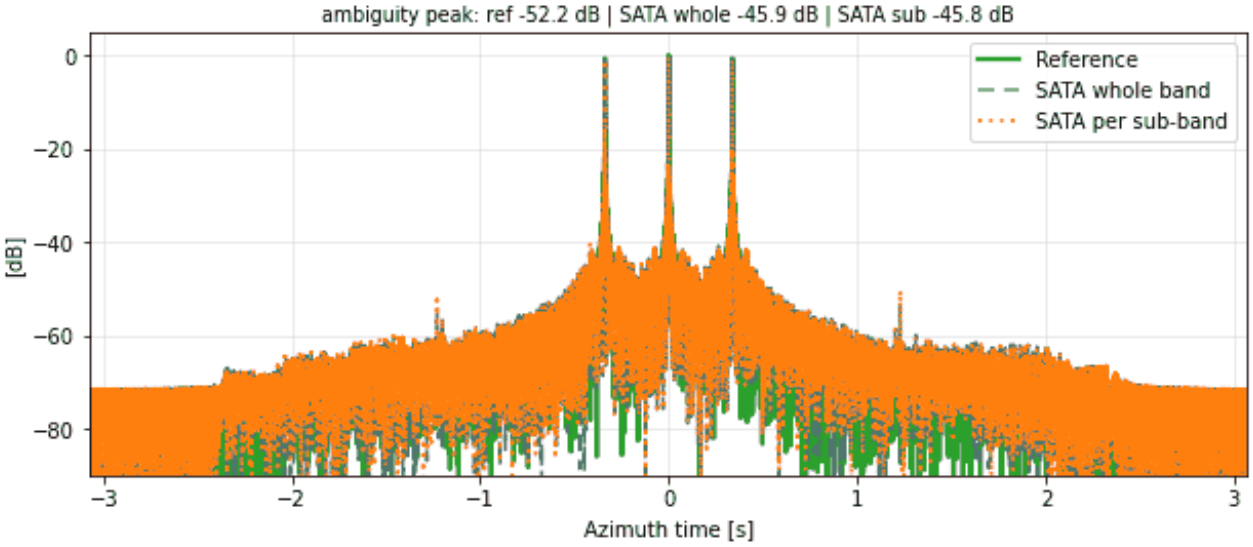



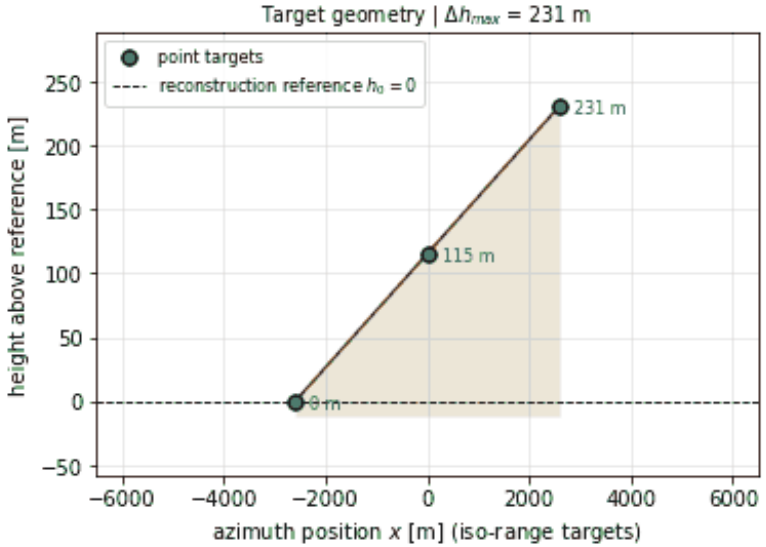


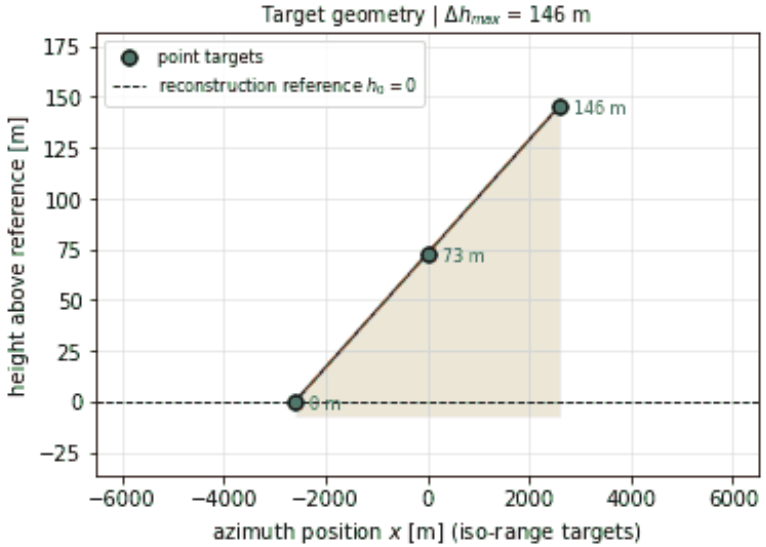





RA-NN-024 | SATA 1D | along-track ramp: N = 3, $\alpha = 30^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

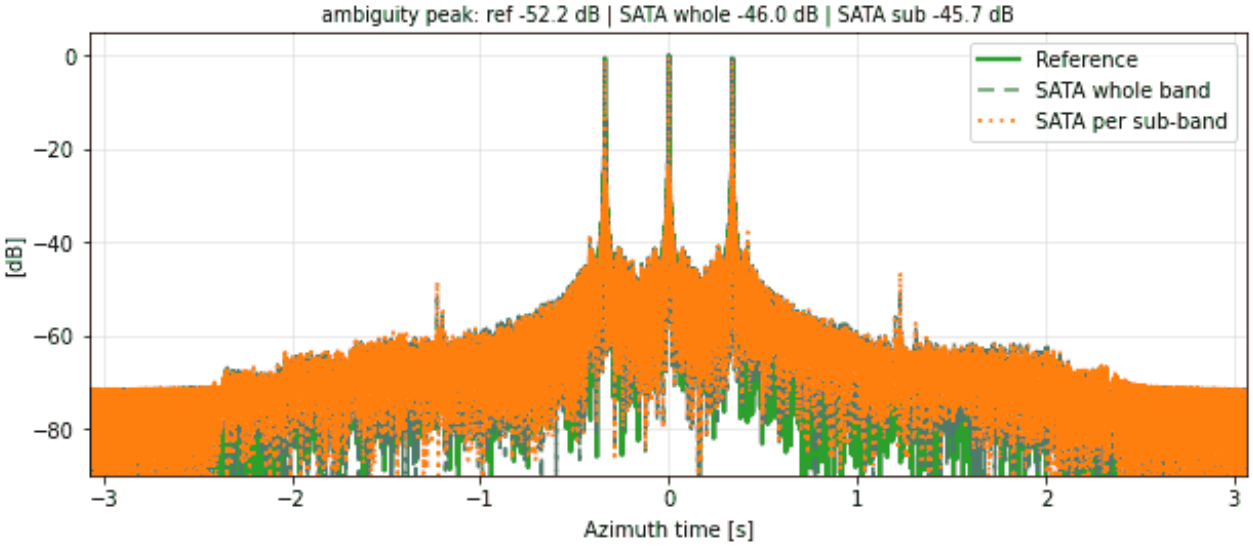

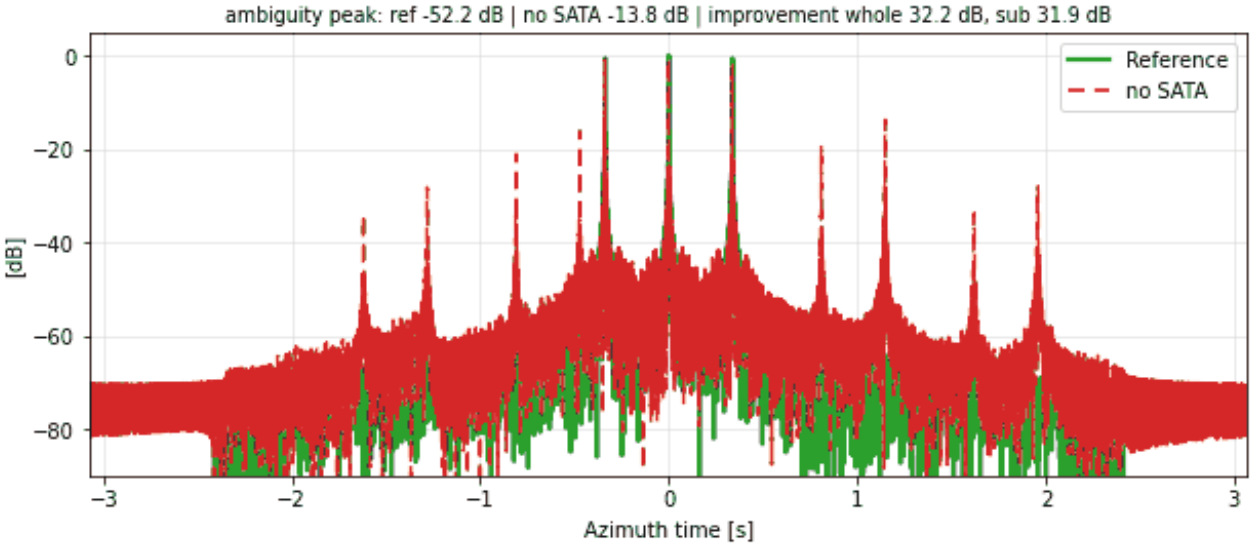



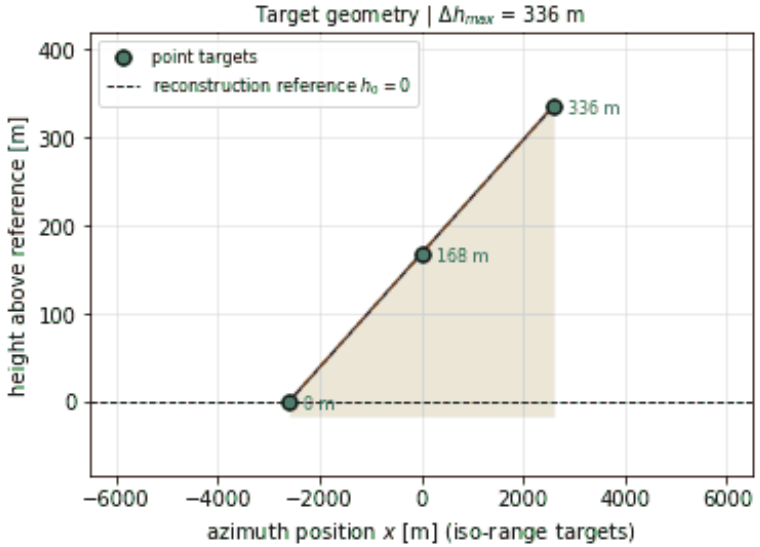


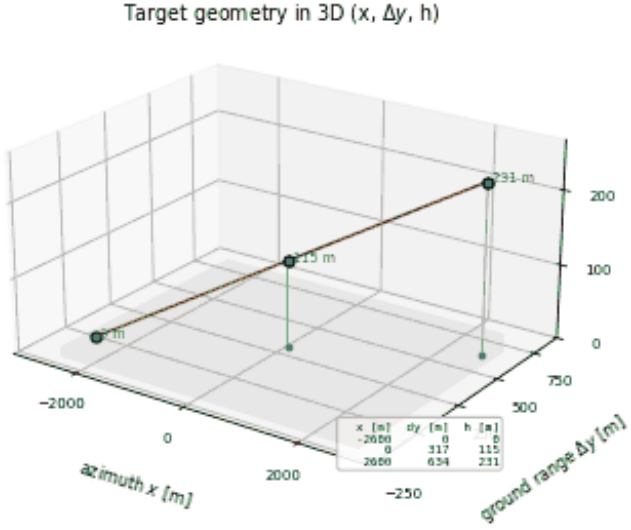
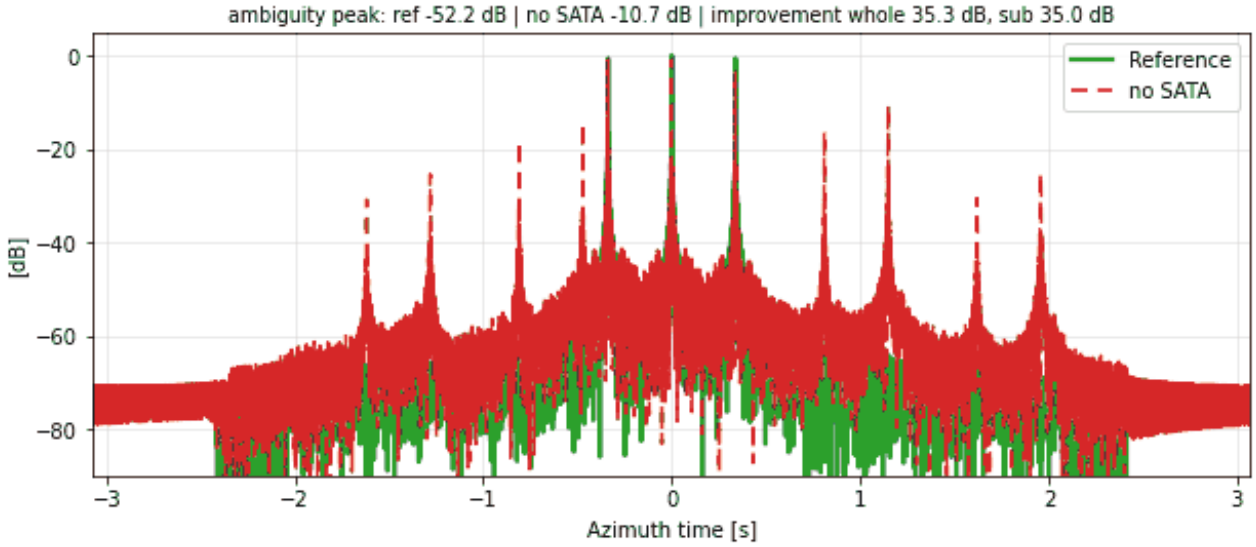



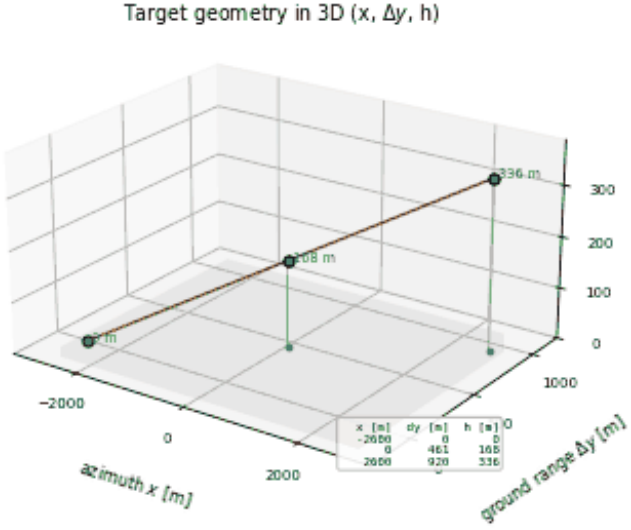

320

RA-NN-025 | SATA 1D | along-track ramp: N = 3, $\alpha = 40°$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

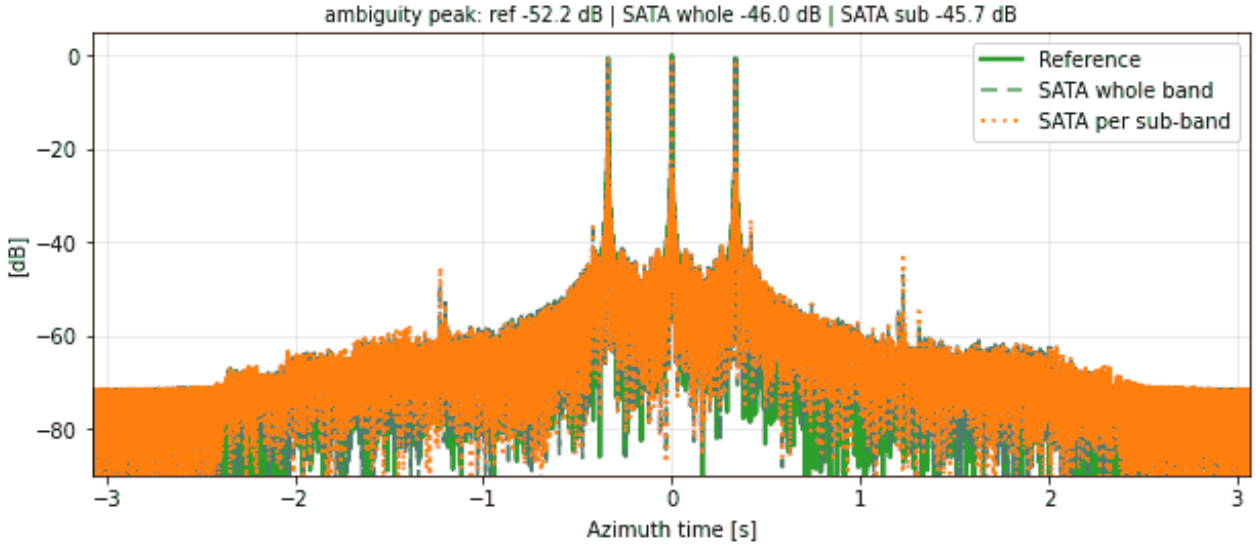






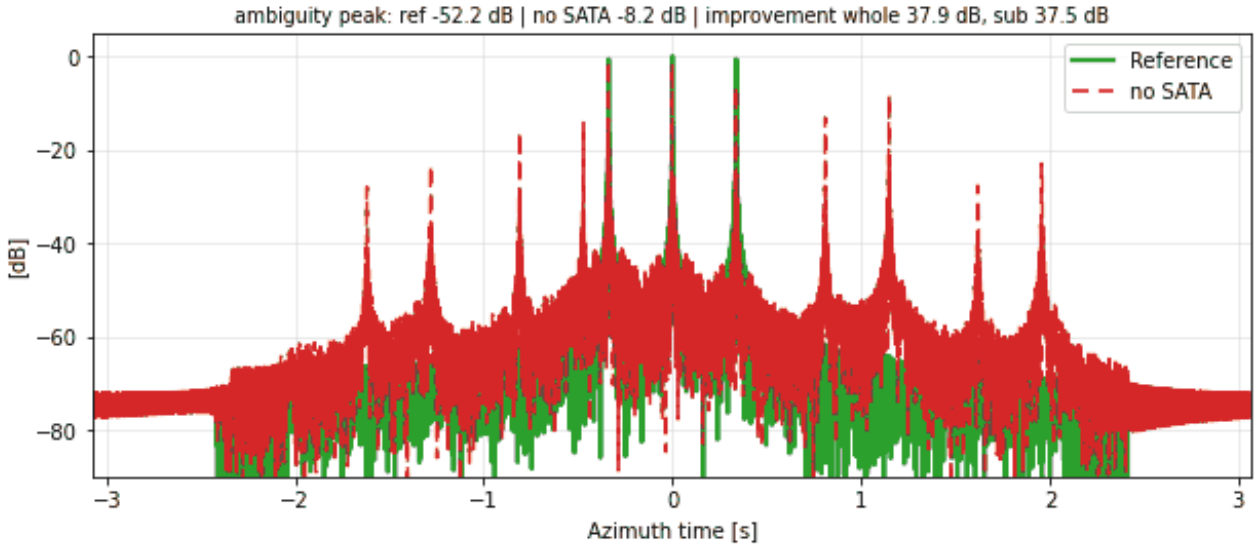



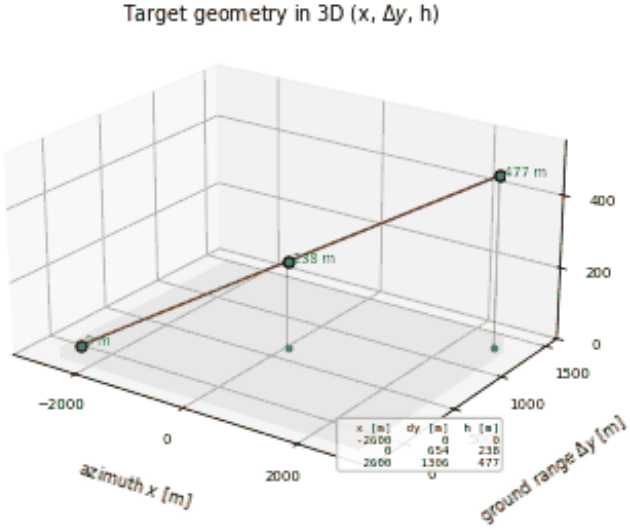



RA-NN-026 | SATA 1D | along-track ramp: N = 3, $\alpha = 50^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

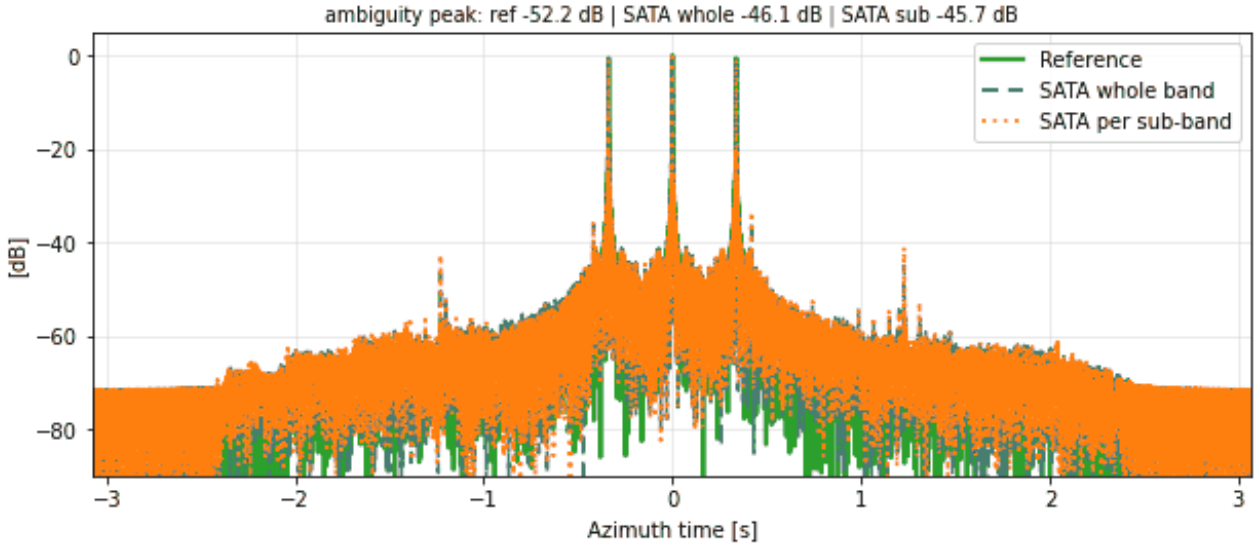


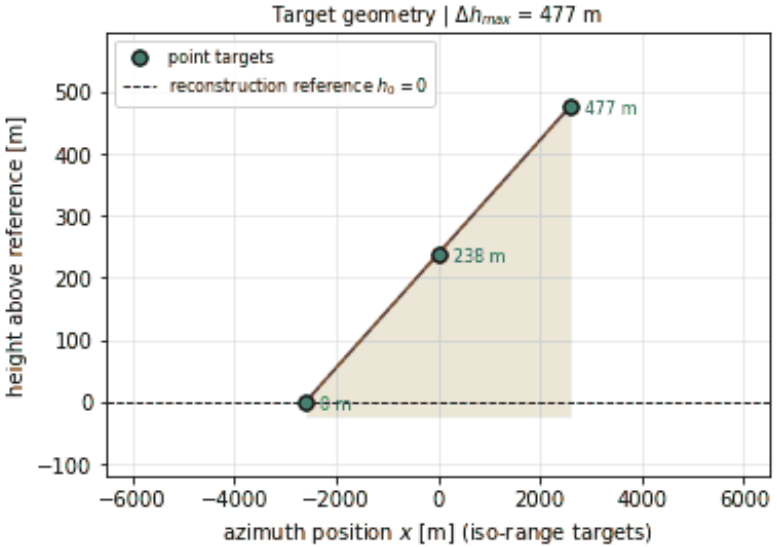



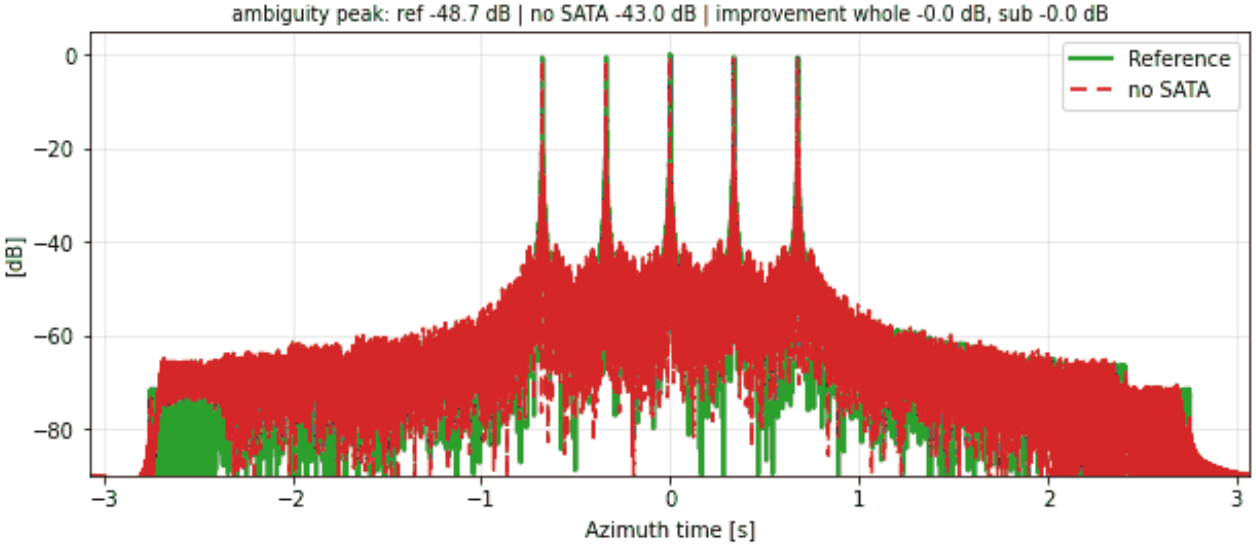



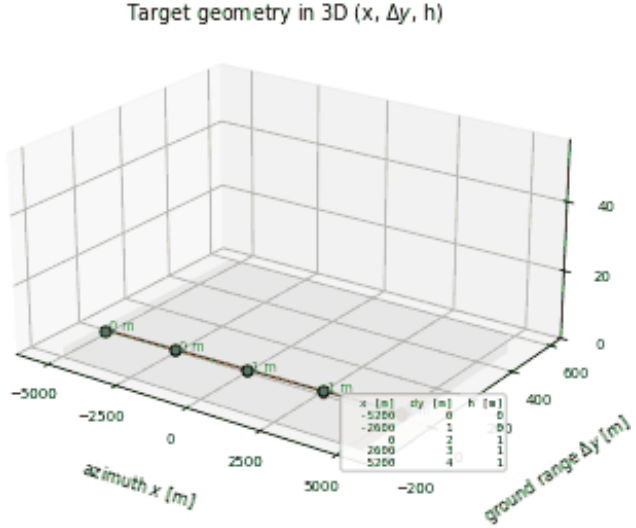



RA-NN-027 | SATA 1D | along-track ramp: N = 5, $\alpha = 0.1^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

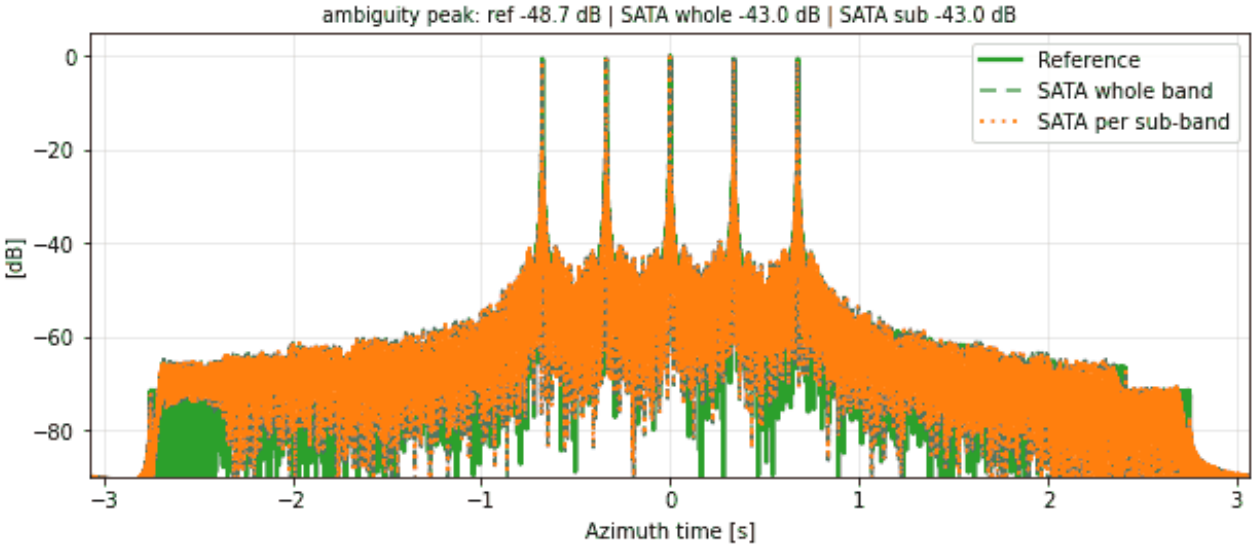


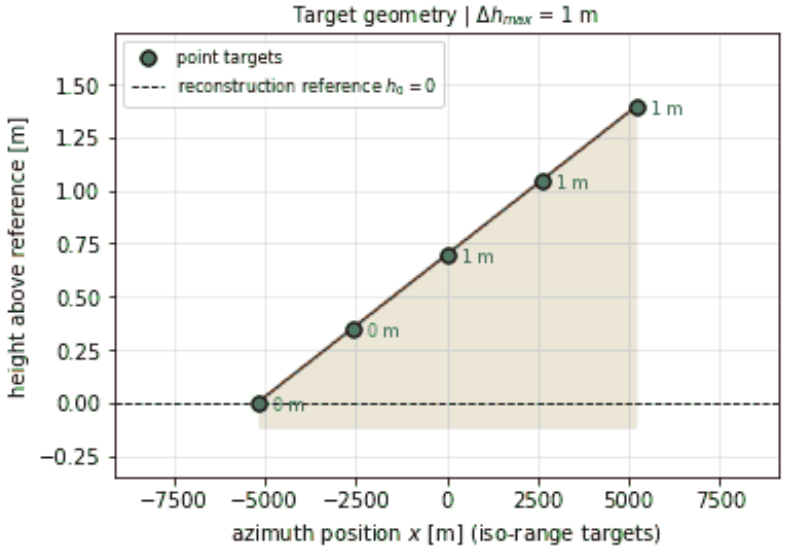



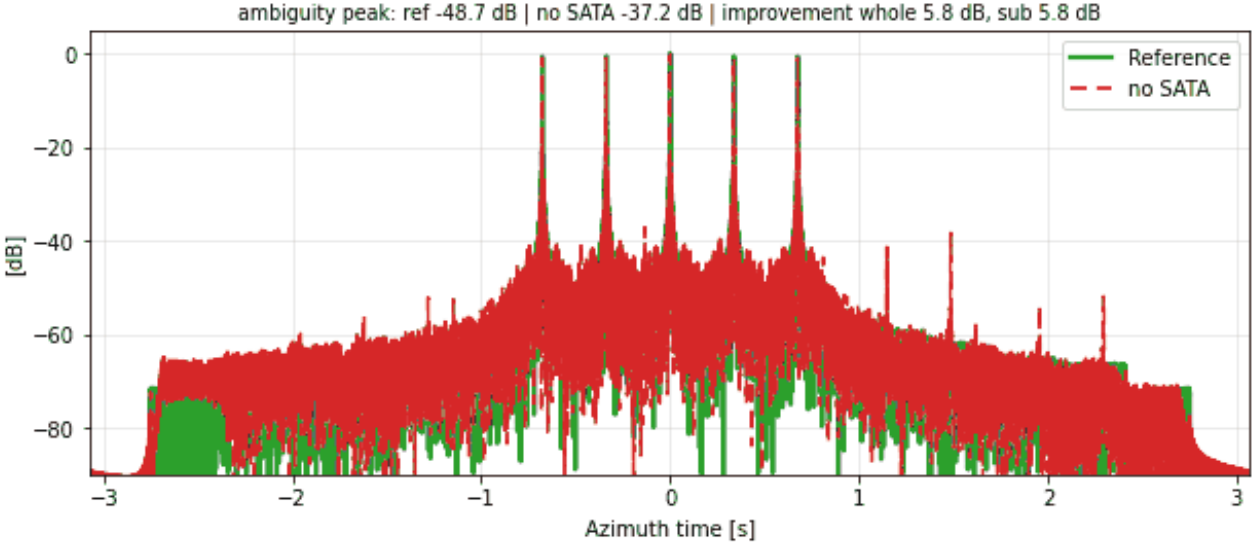



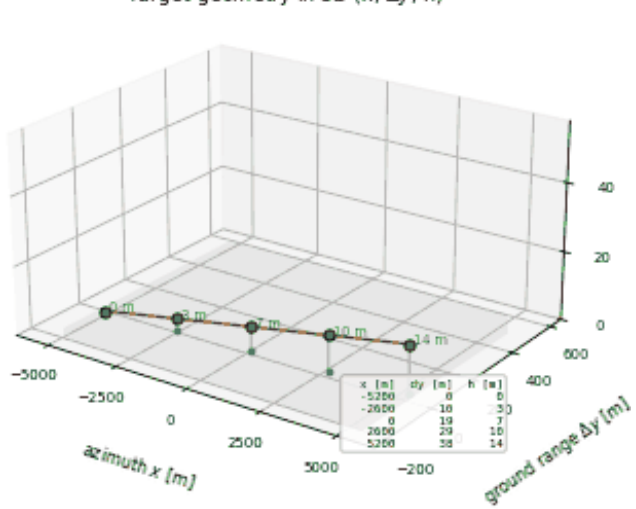



RA-NN-028 | SATA 1D | along-track ramp: N = 5, $\alpha = 1°$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

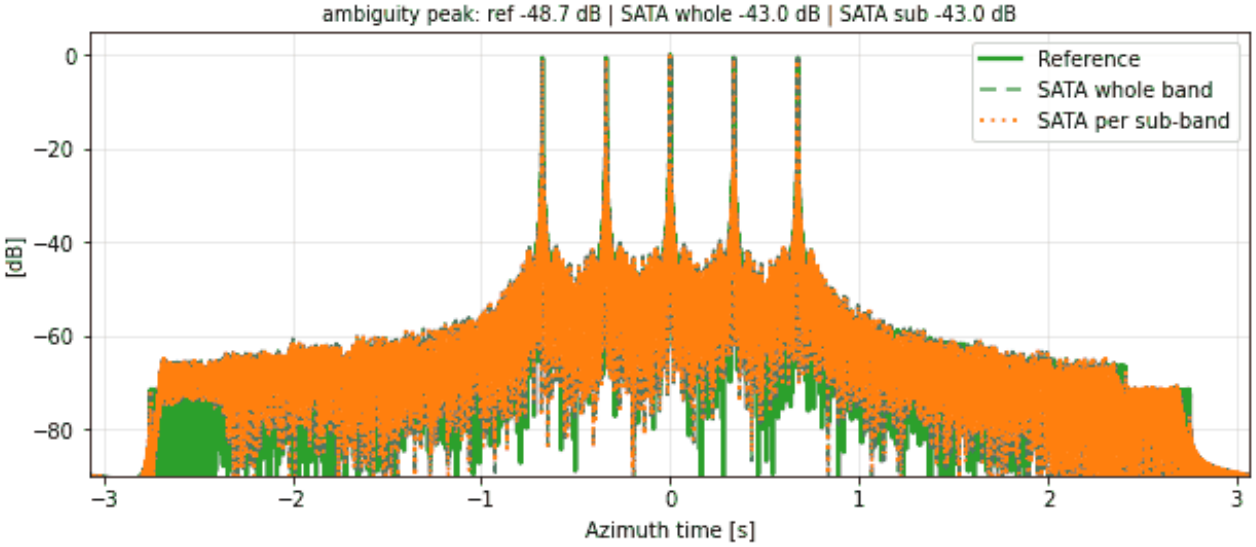


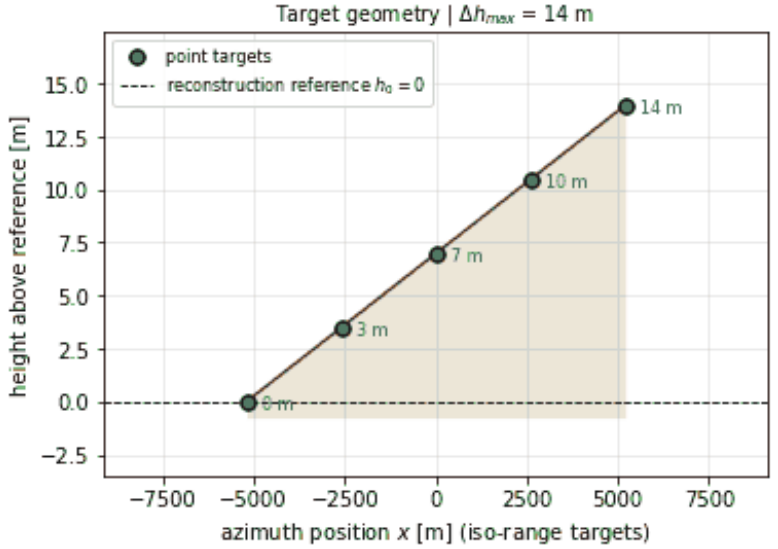



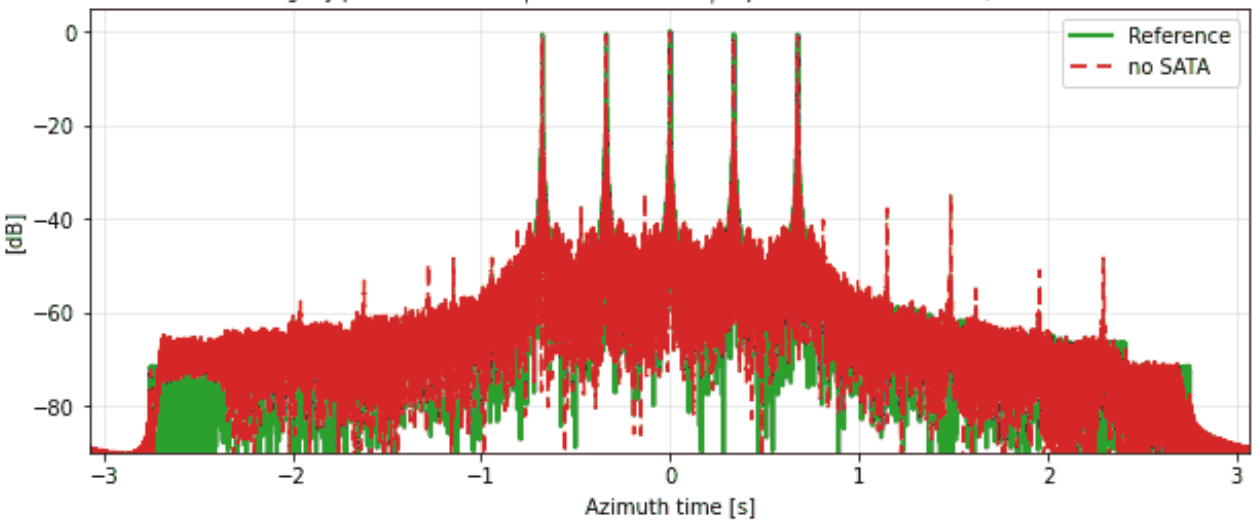



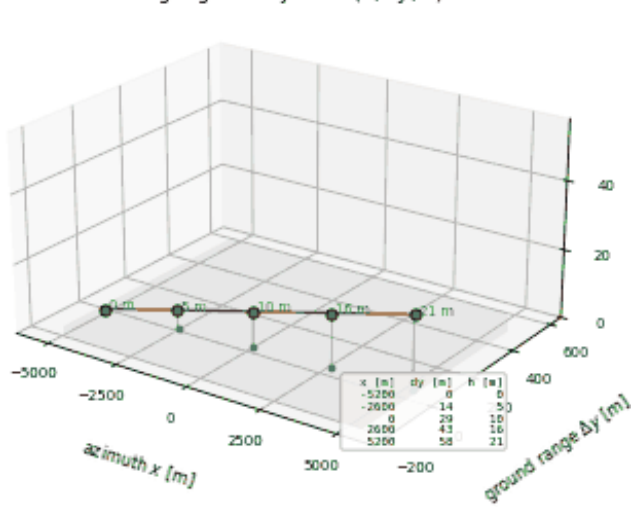



RA-NN-029 | SATA 1D | along-track ramp: N = 5, $\alpha = 1.5°$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

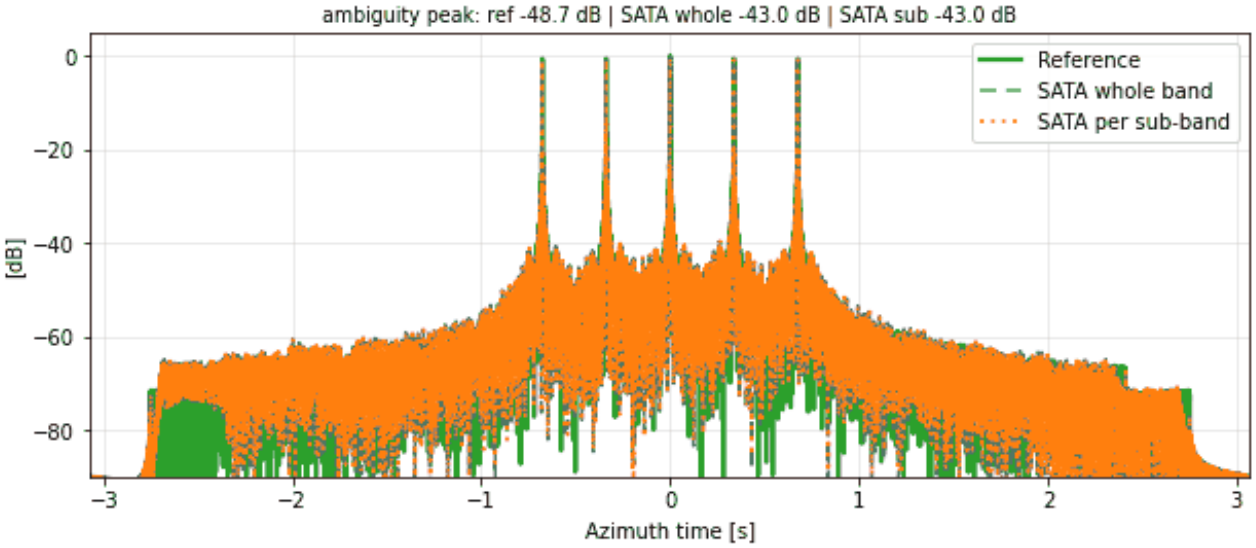


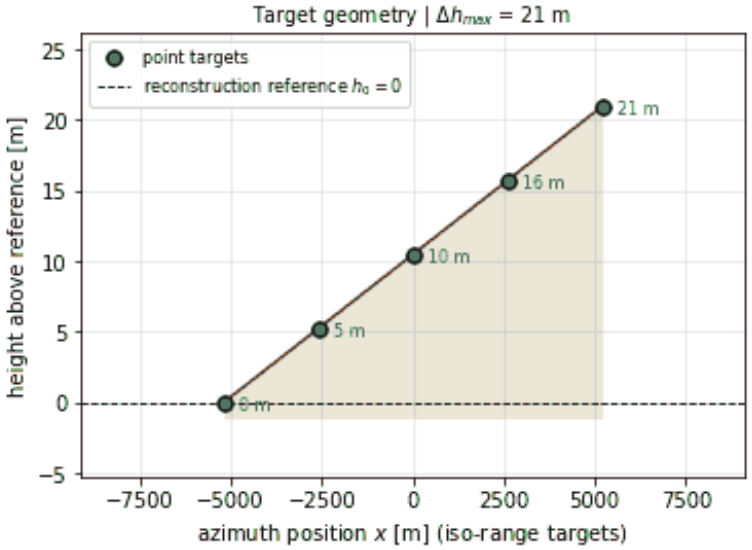



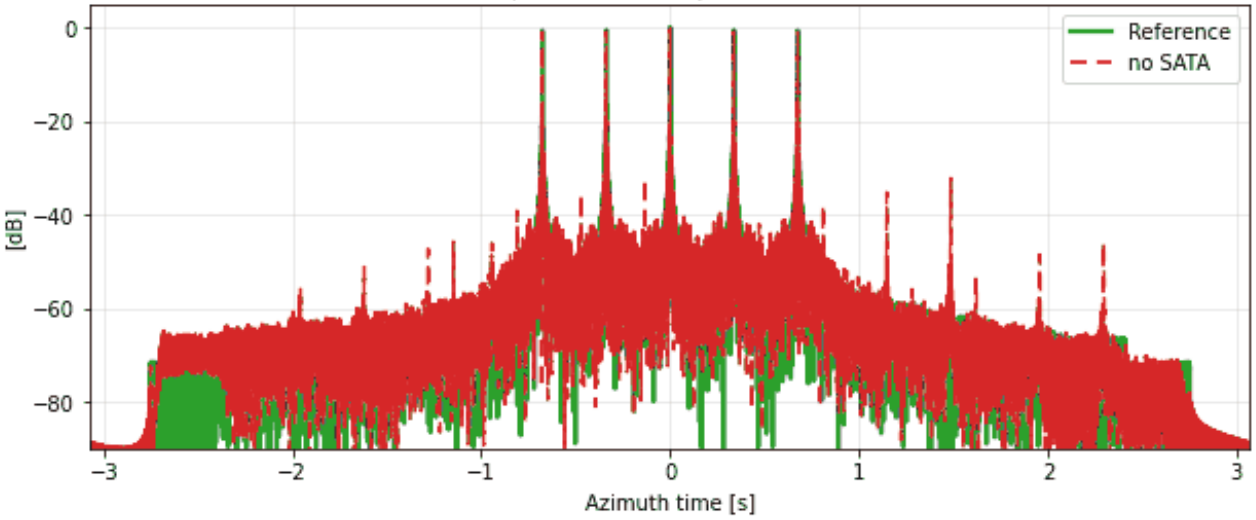



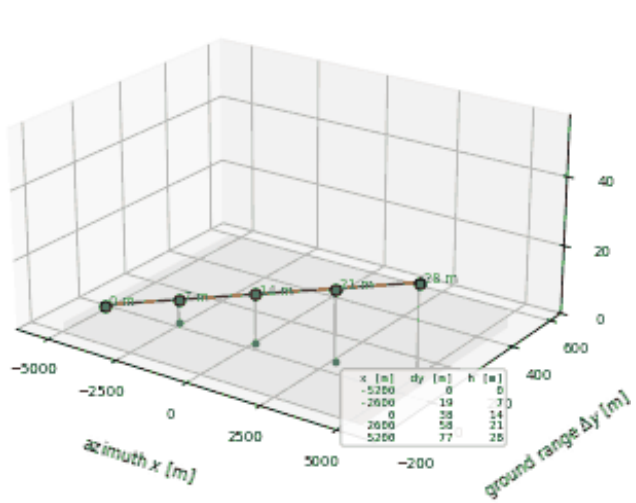



RA-NN-030 | SATA 1D | along-track ramp: N = 5, $\alpha = 2^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

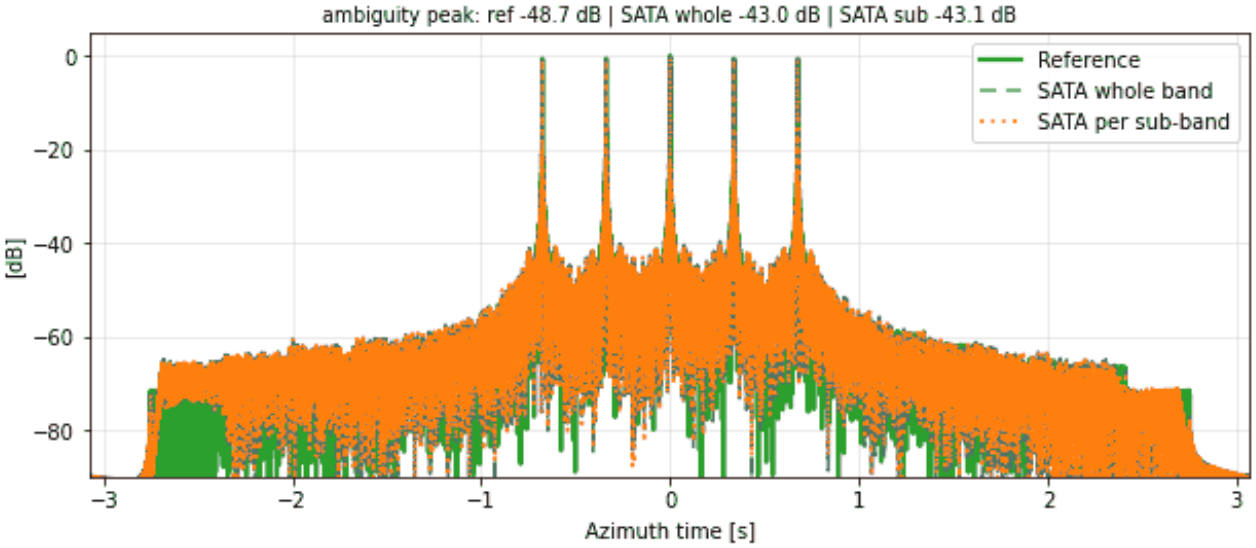


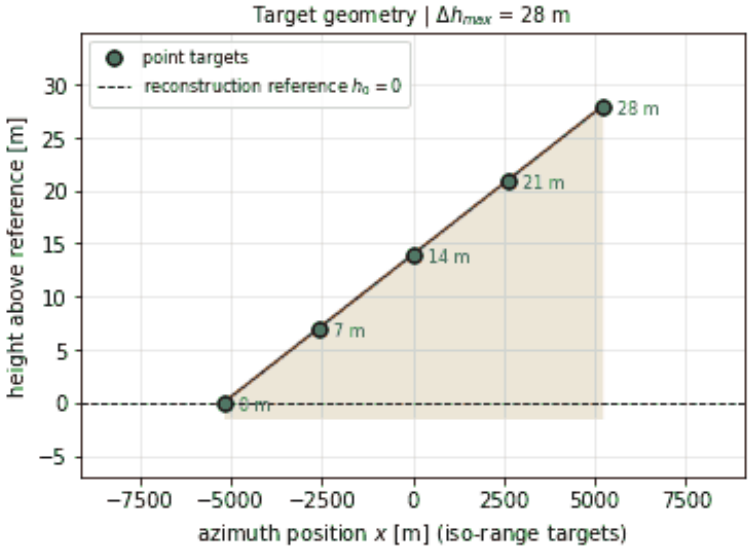



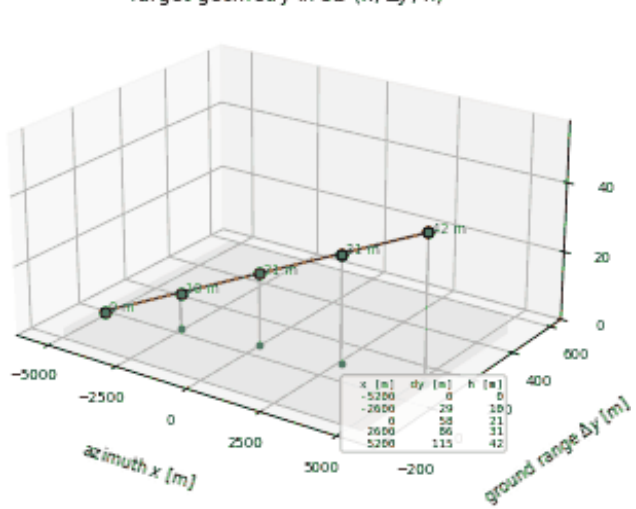
RA-NN-031 | SATA 1D | along-track ramp: N = 5, $\alpha = 3°$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



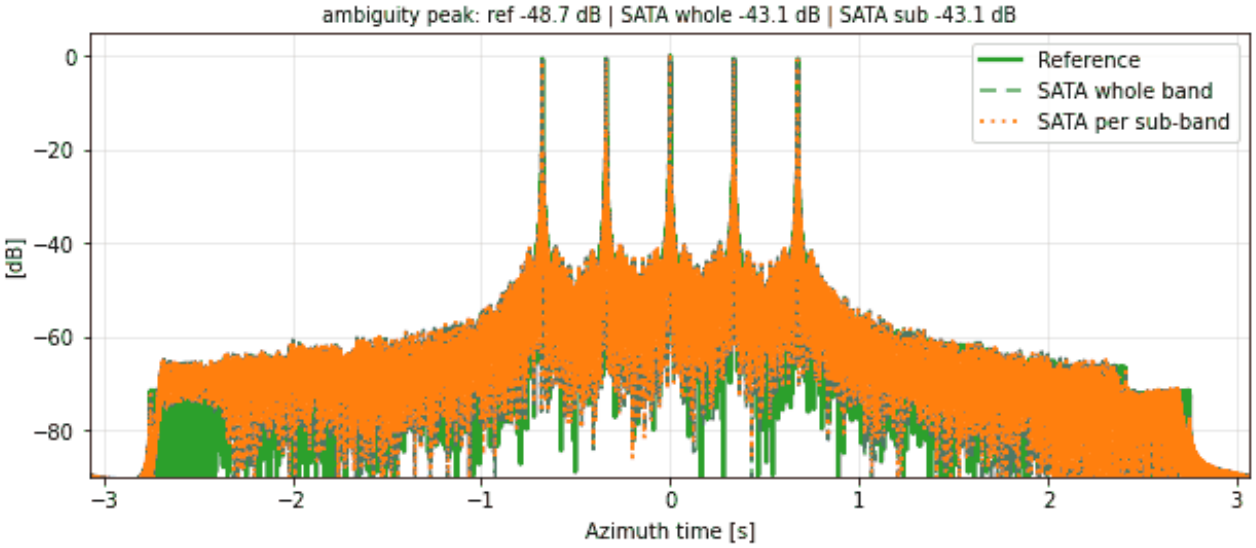



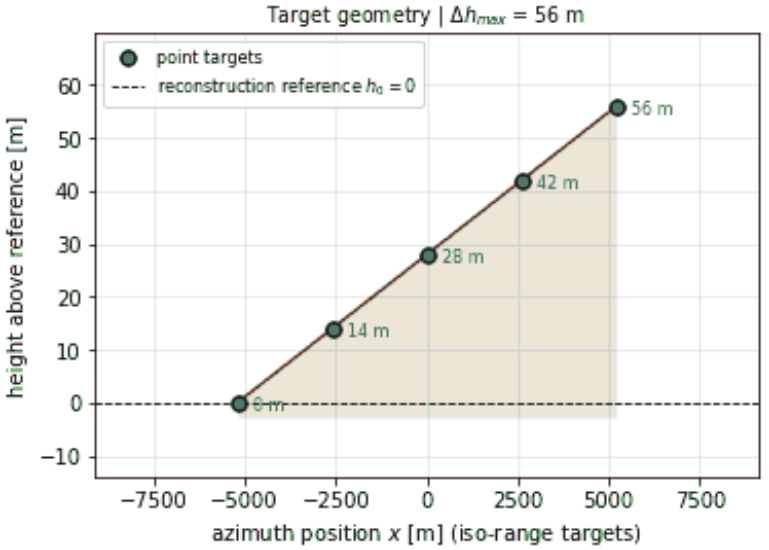


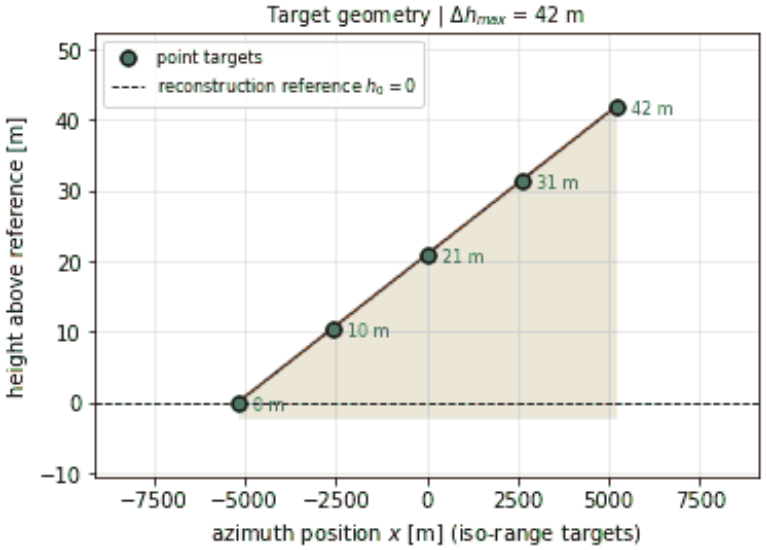




RA-NN-032 | SATA 1D | along-track ramp: N = 5, $\alpha = 4°$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

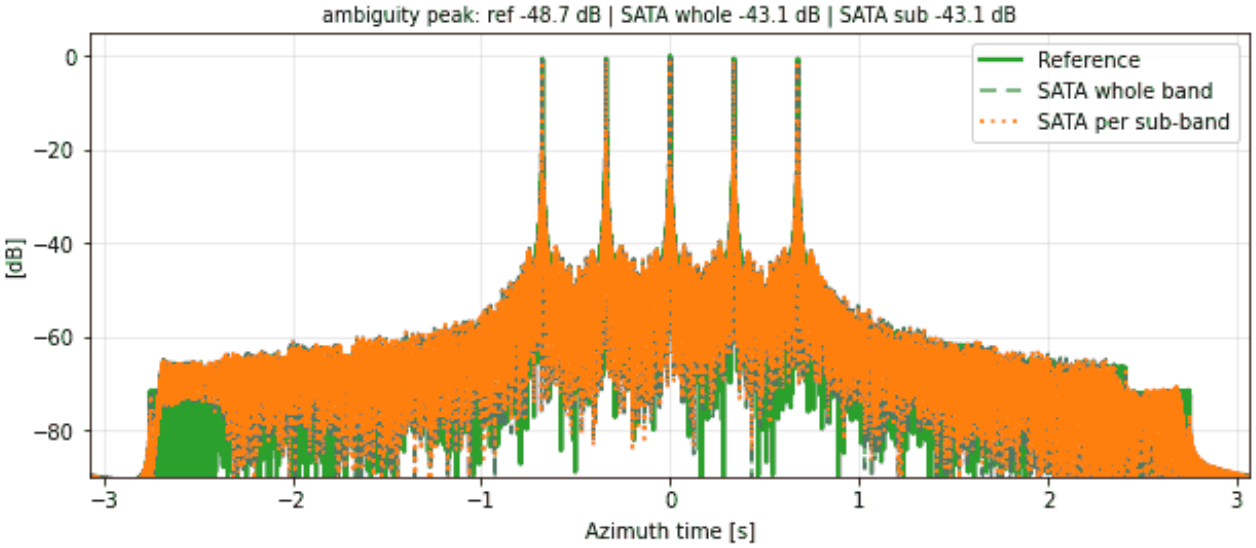





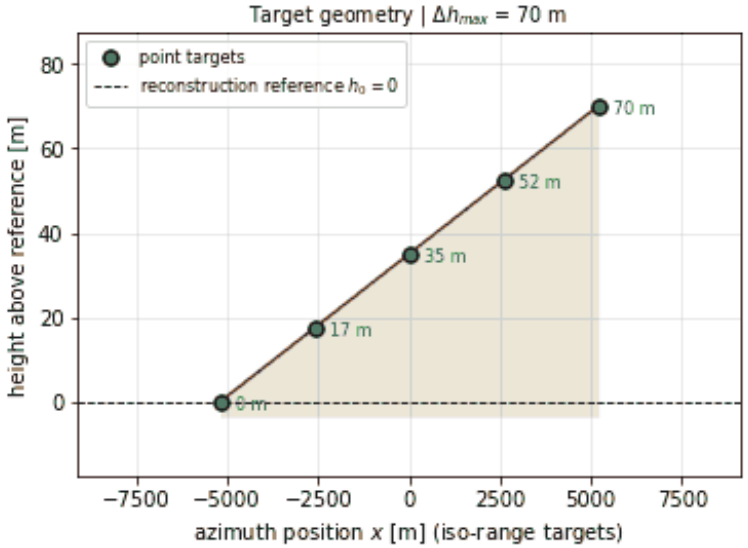




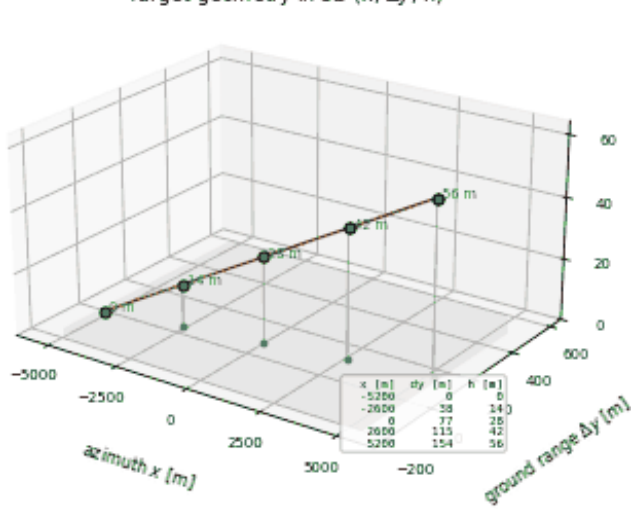


RA-NN-033 | SATA 1D | along-track ramp: N = 5, $\alpha = 5°$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

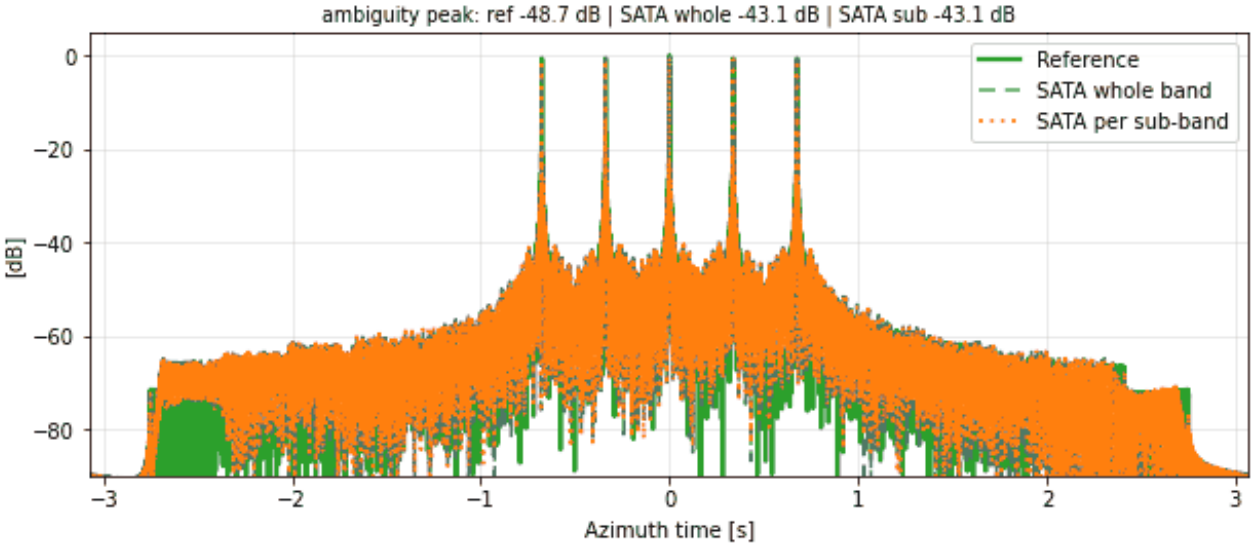





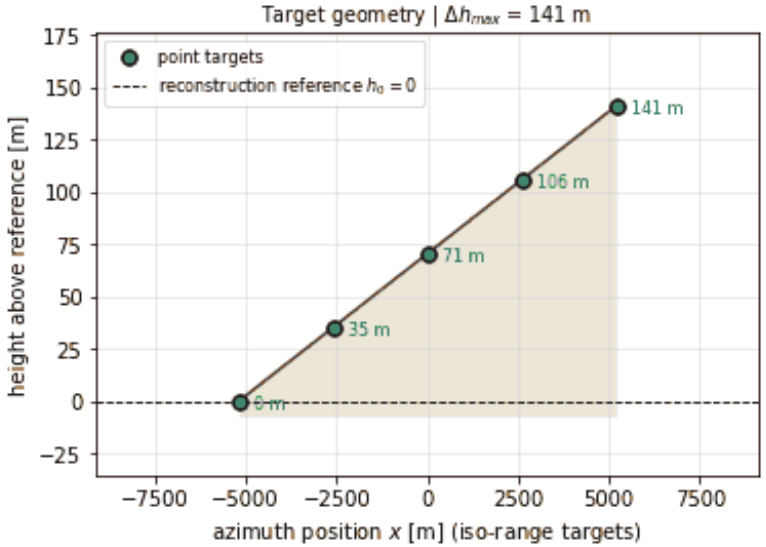




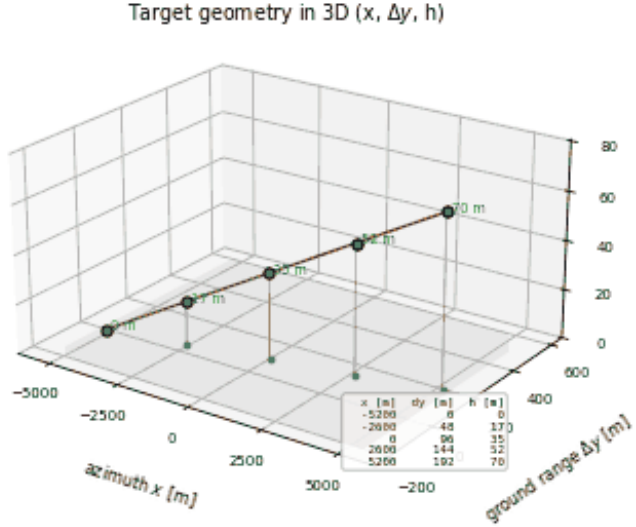


RA-NN-034 | SATA 1D | along-track ramp: N = 5, $\alpha = 10^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

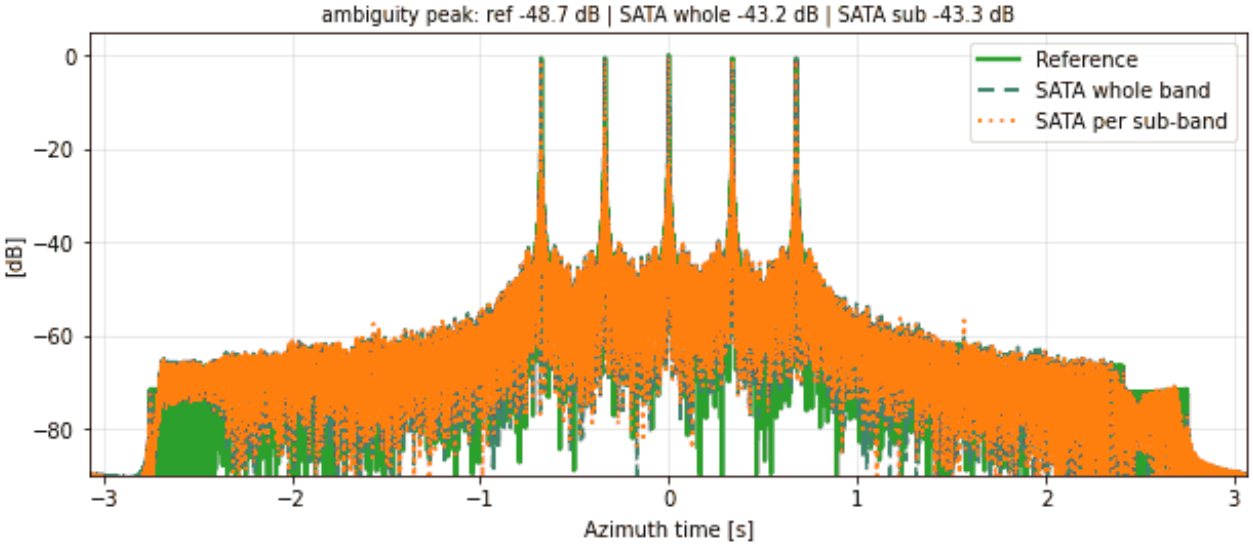





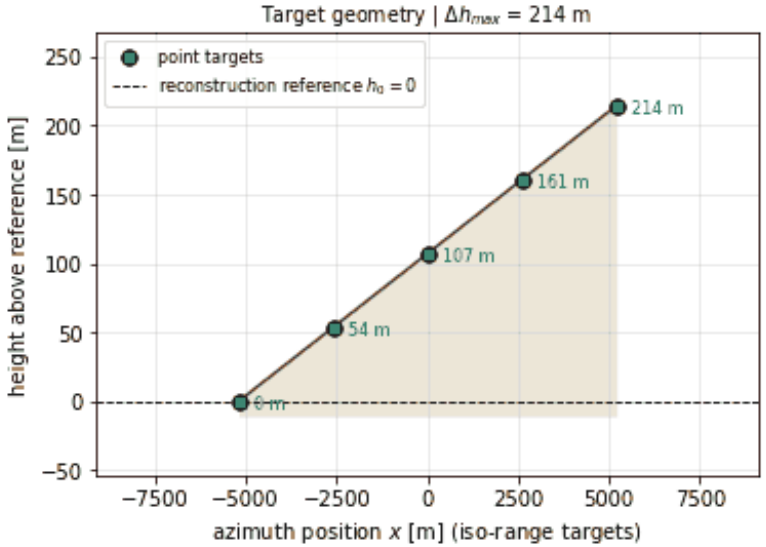




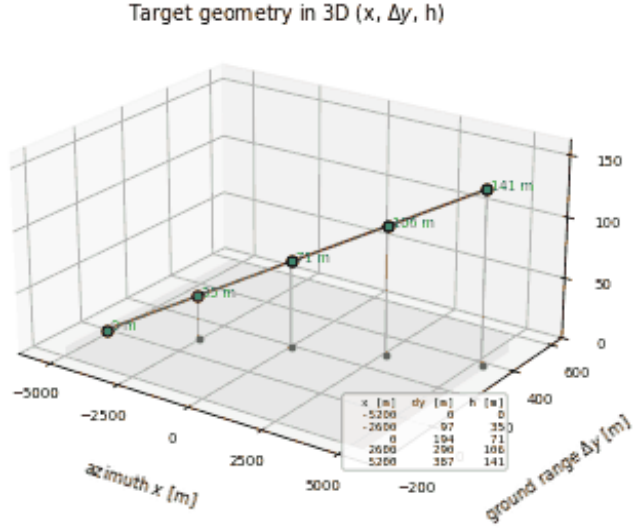


RA-NN-035 | SATA 1D | along-track ramp: N = 5, $\alpha = 15^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

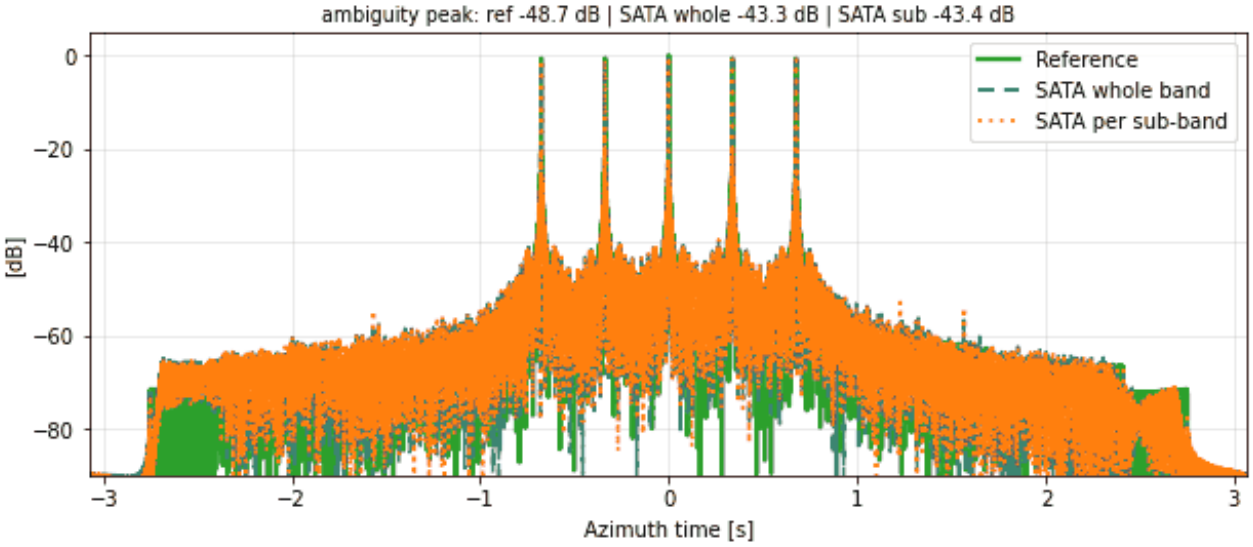





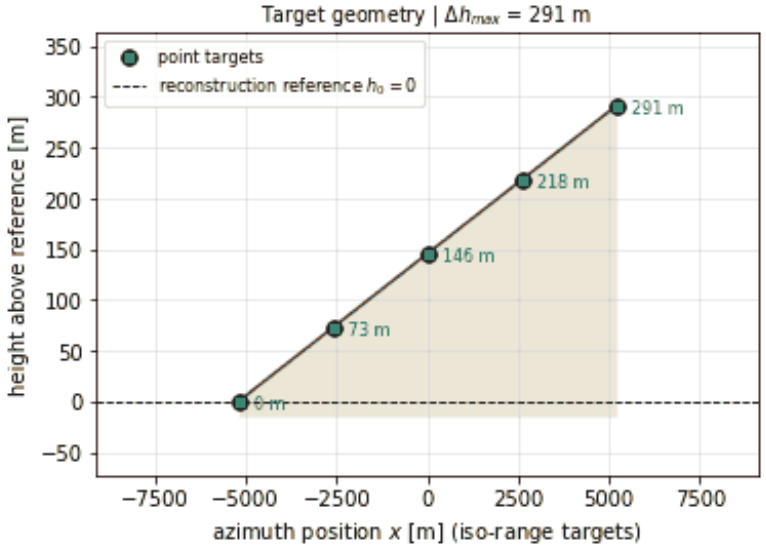





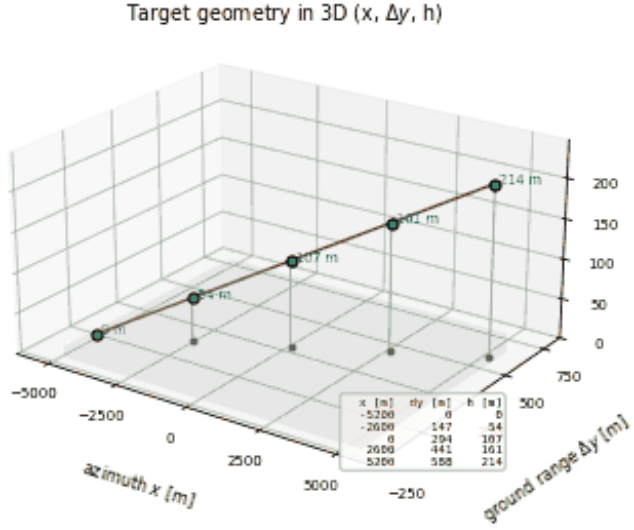


RA-NN-036 | SATA 1D | along-track ramp: N = 5, $\alpha = 20°$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

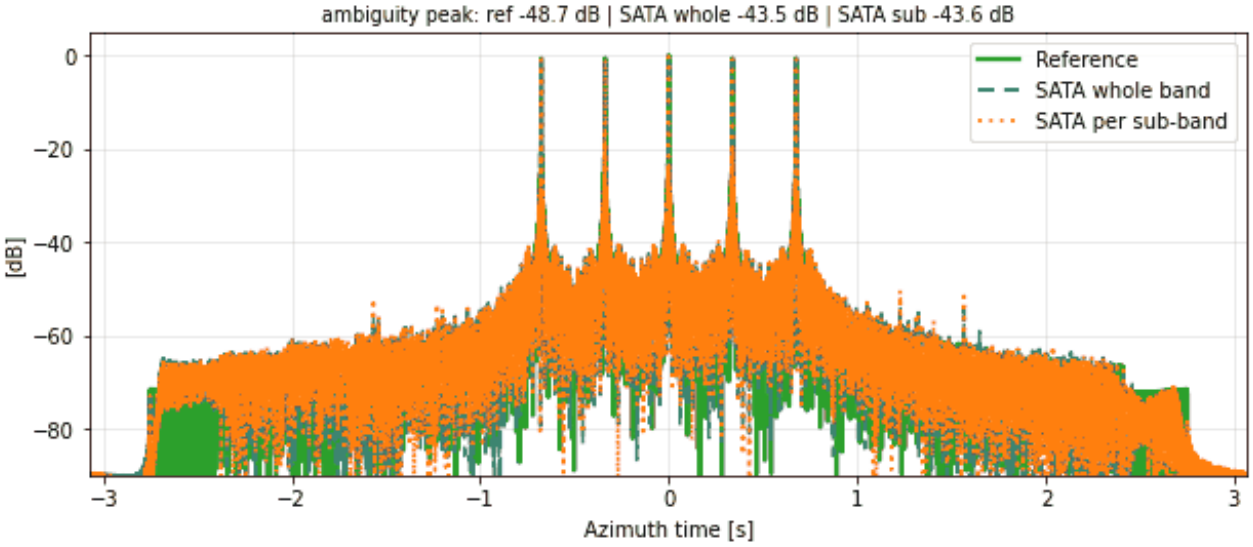


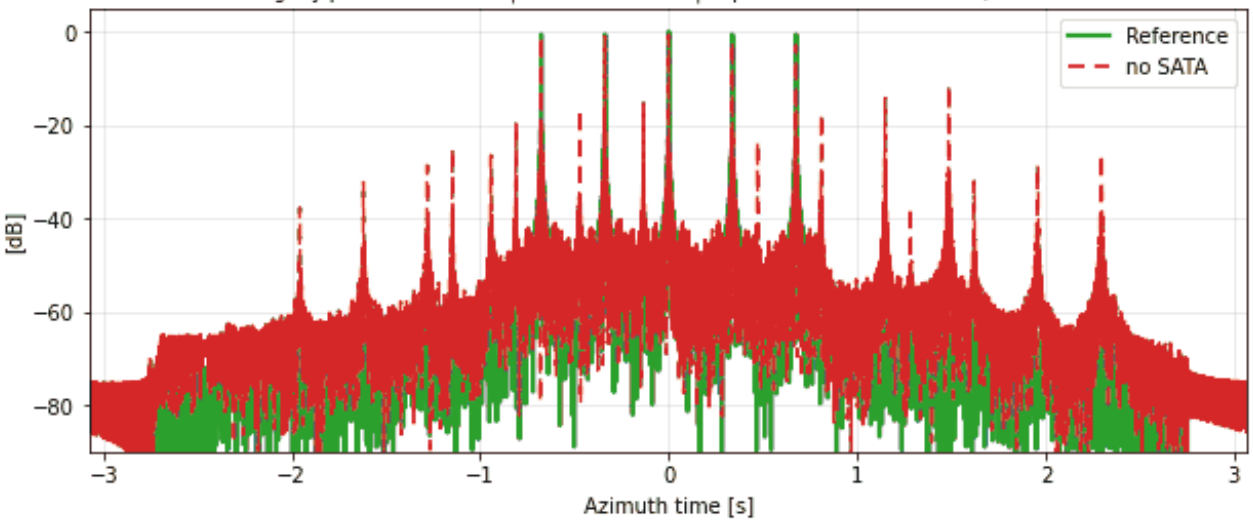



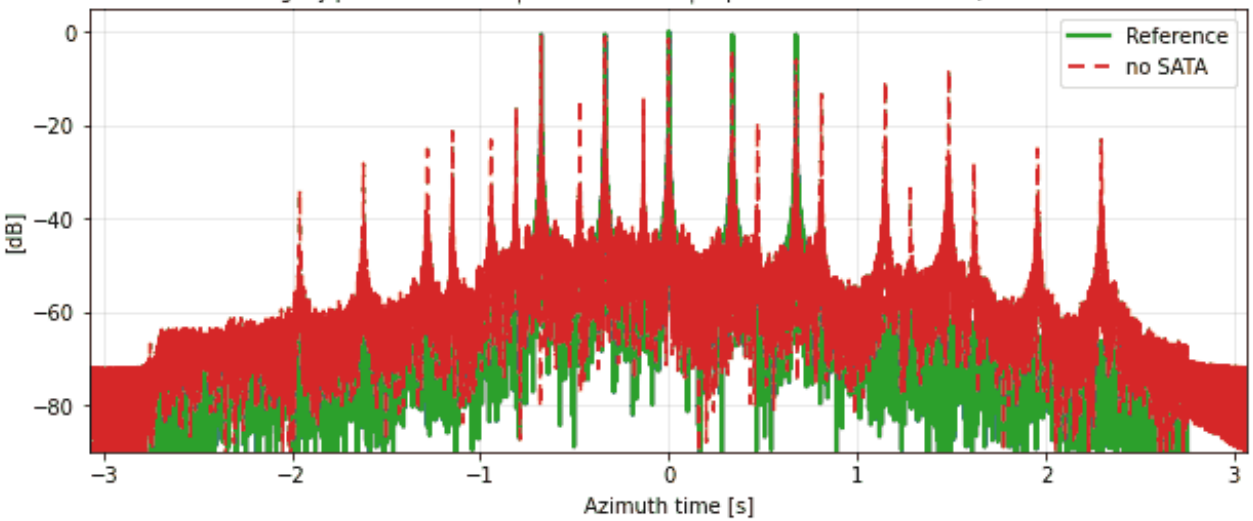


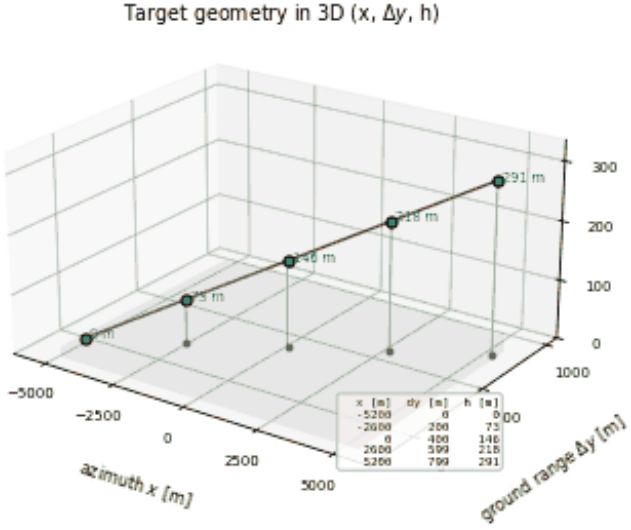
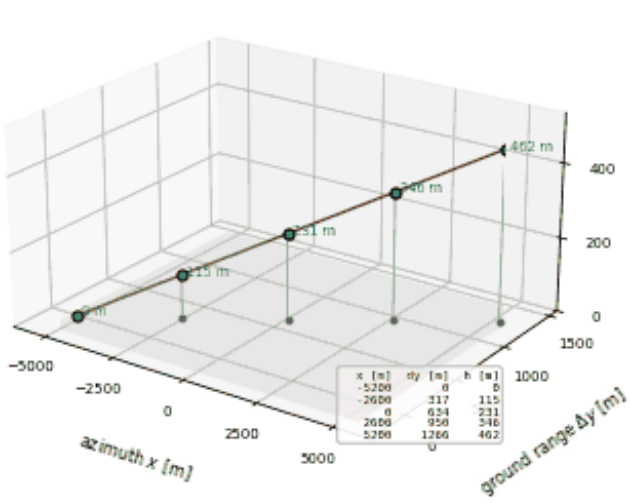



RA-NN-037 | SATA 1D | along-track ramp: N = 5, $\alpha = 30^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

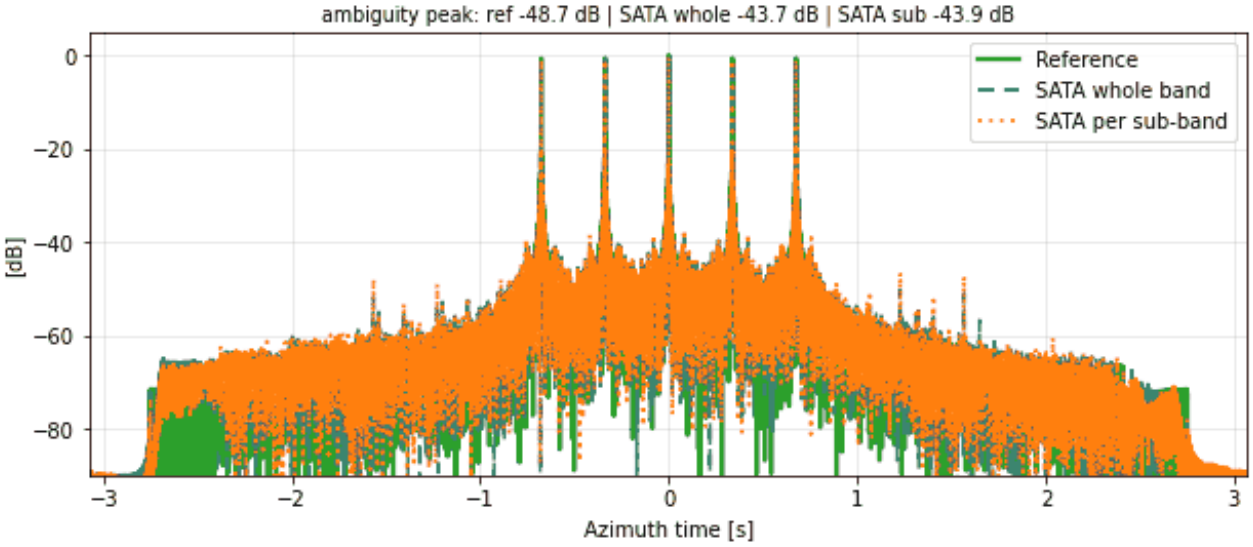


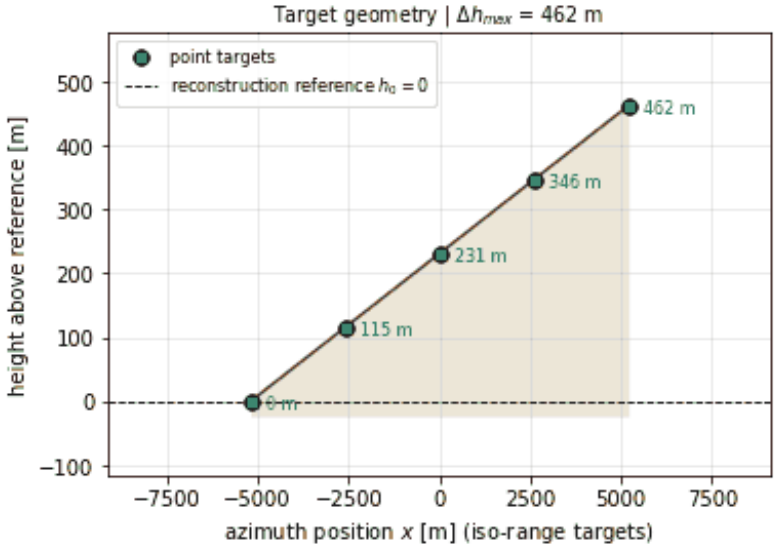



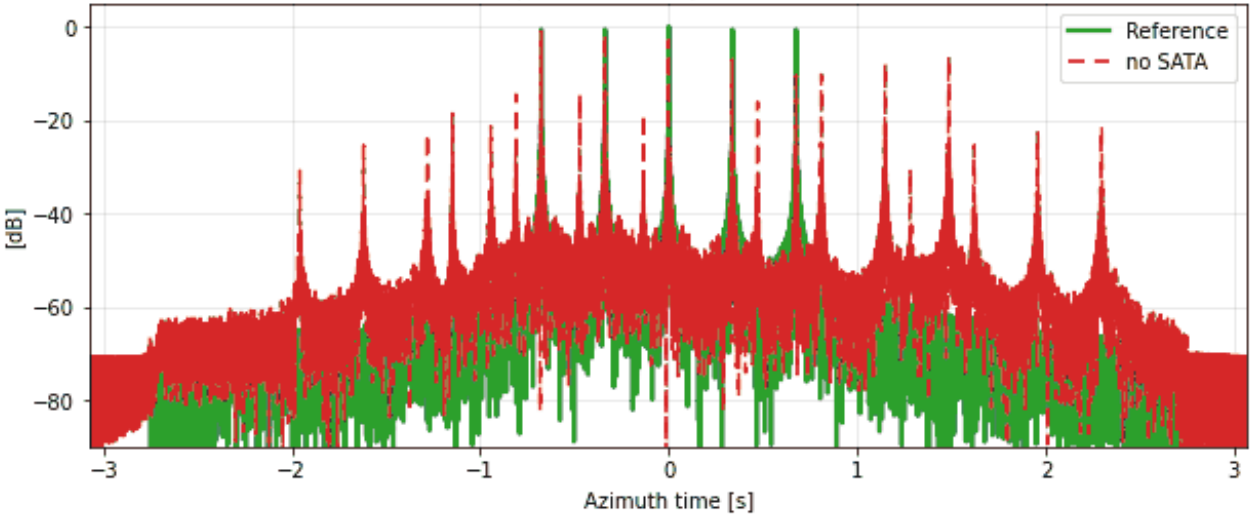



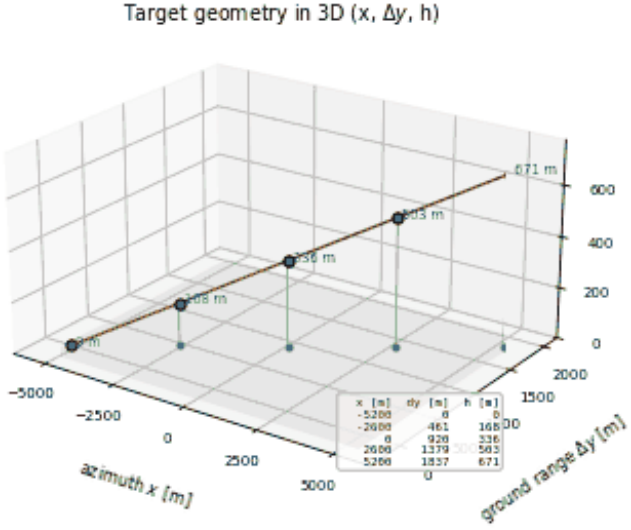



RA-NN-038 | SATA 1D | along-track ramp: N = 5, $\alpha = 40^\circ$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

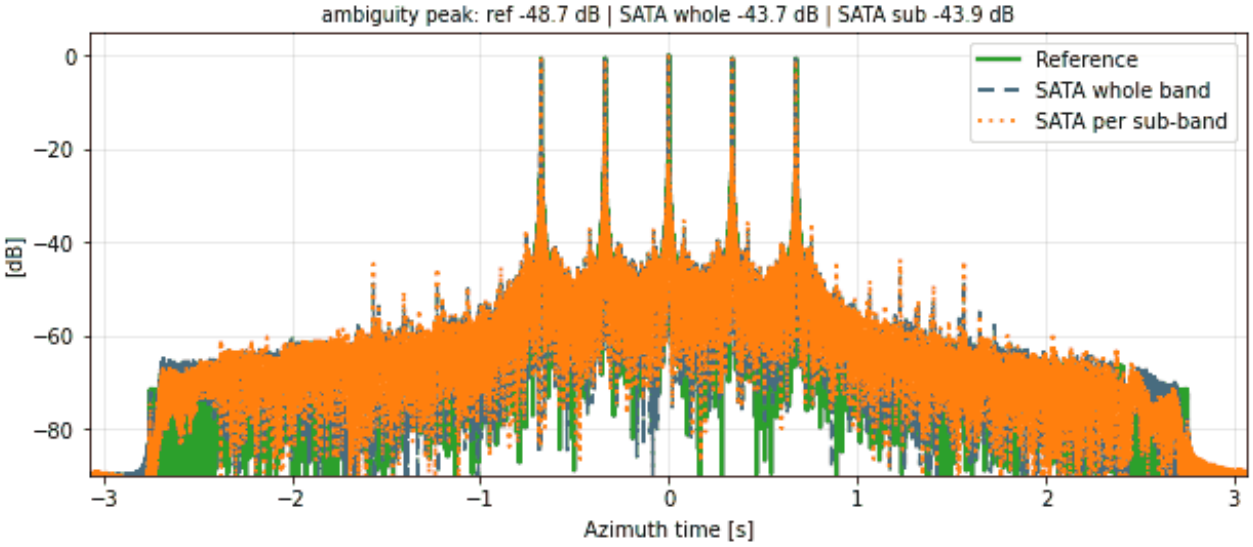


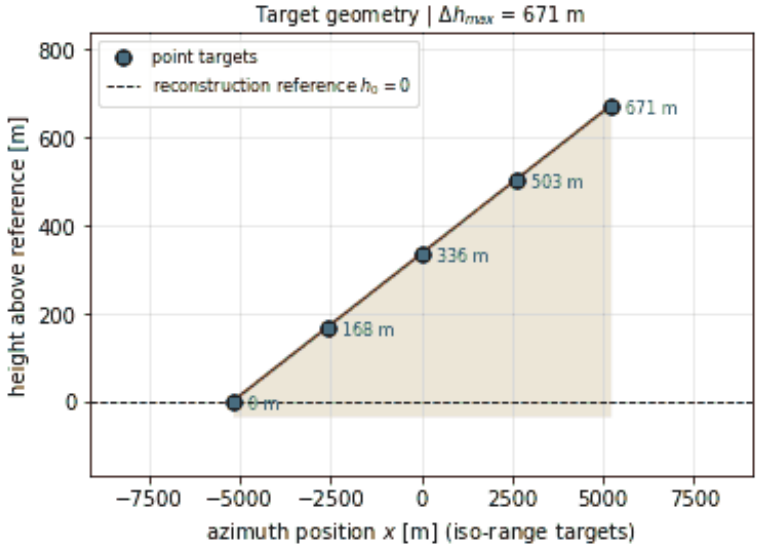



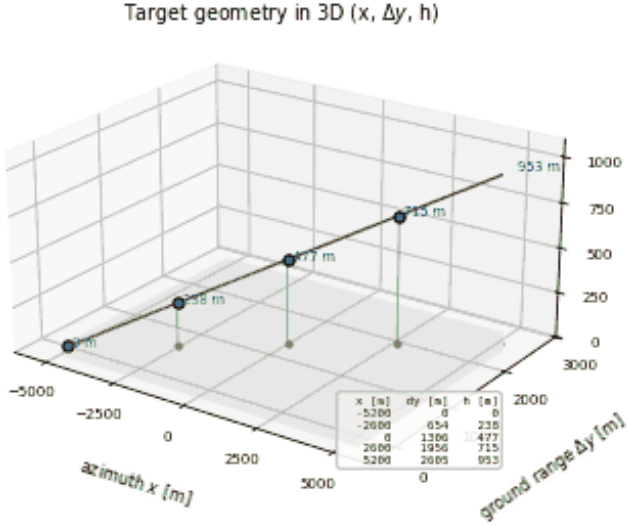
RA-NN-039 | SATA 1D | along-track ramp: N = 5, $\alpha = 50°$ (heights $j \cdot 200\tan\alpha$), targets 2.6 km apart (normal distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)





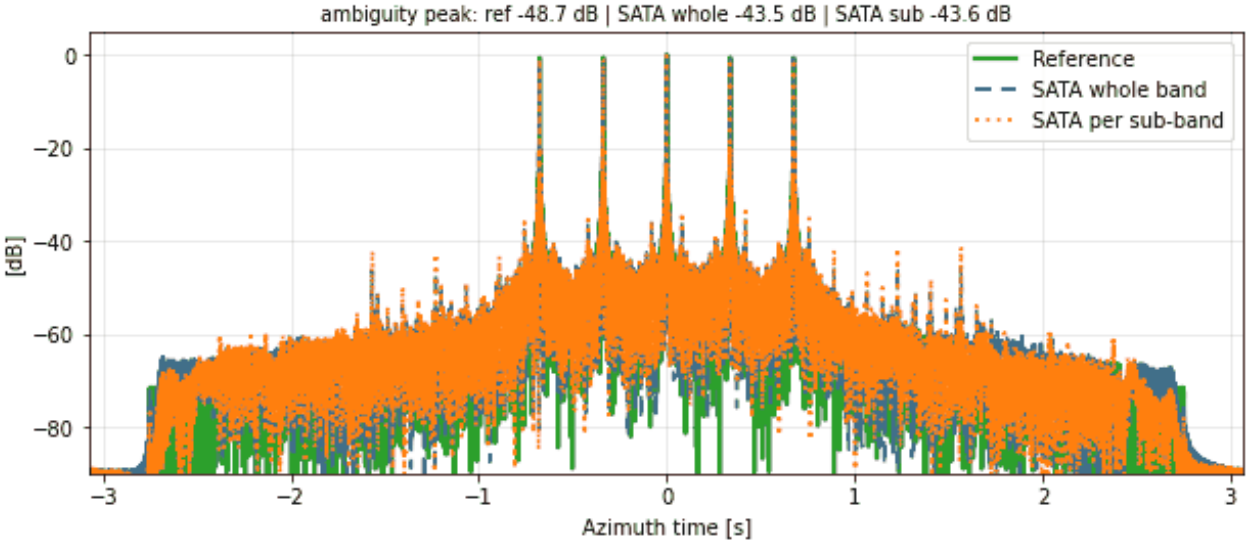


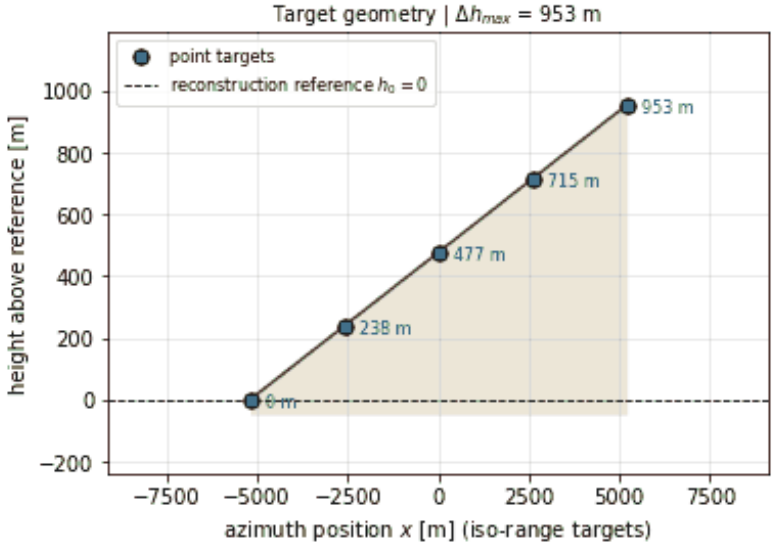




335


RA-NL-001 | SATA 1D | along-track ramp: N = 2, $\alpha = 0.1^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

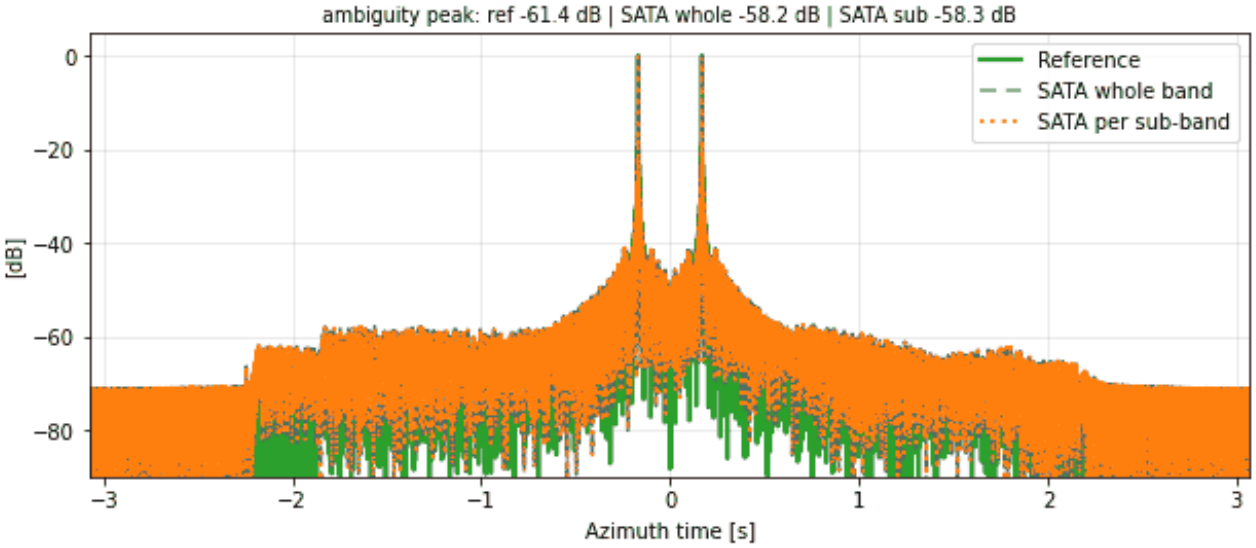


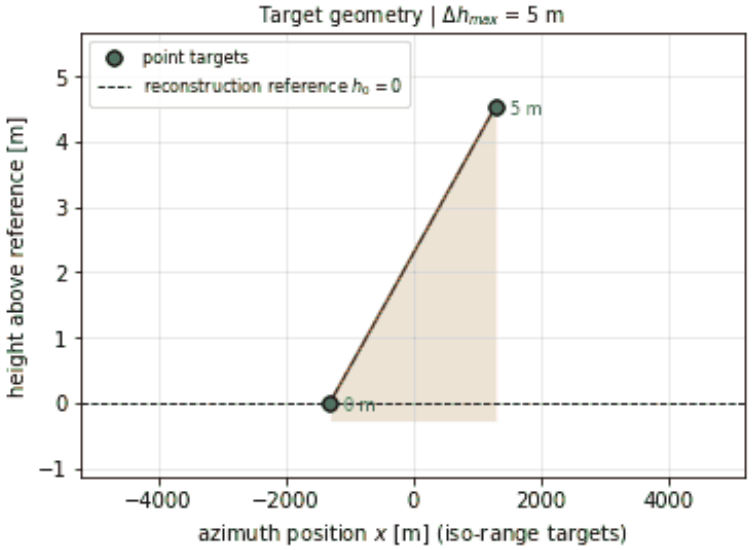


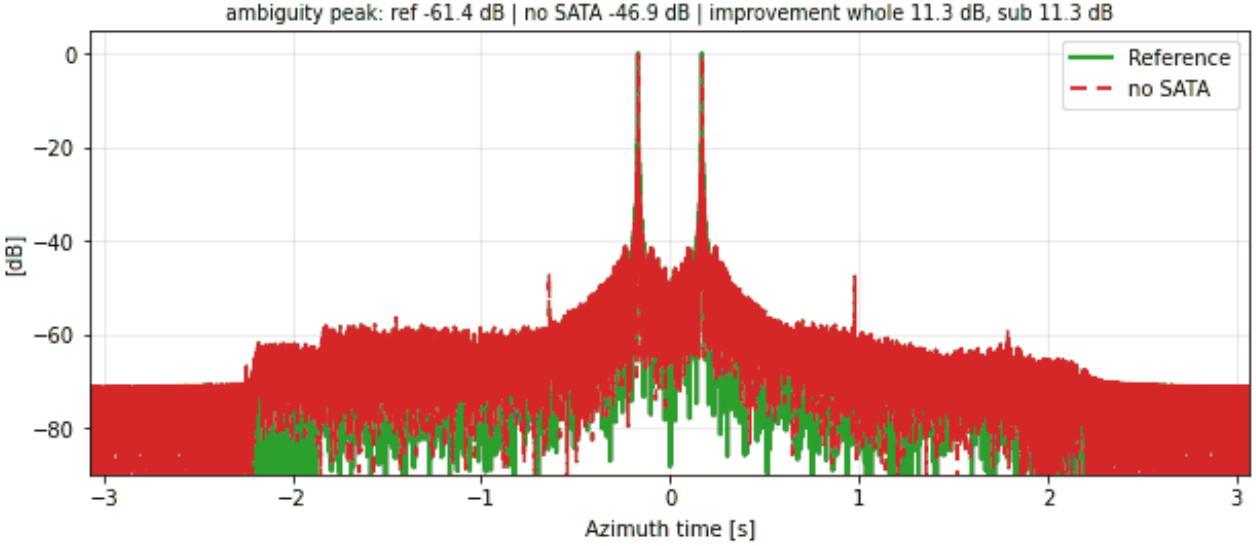
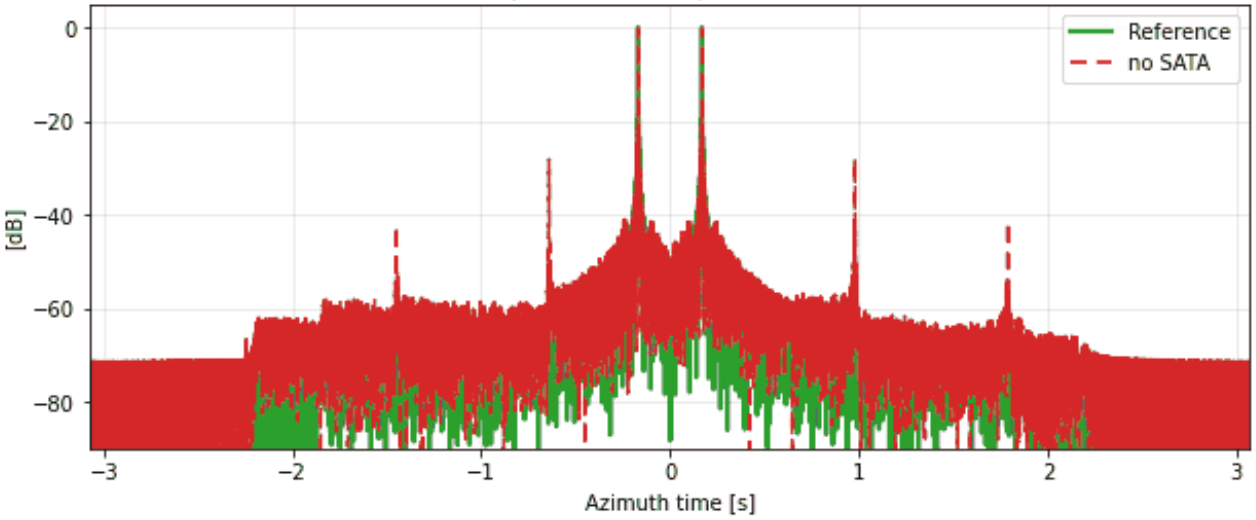


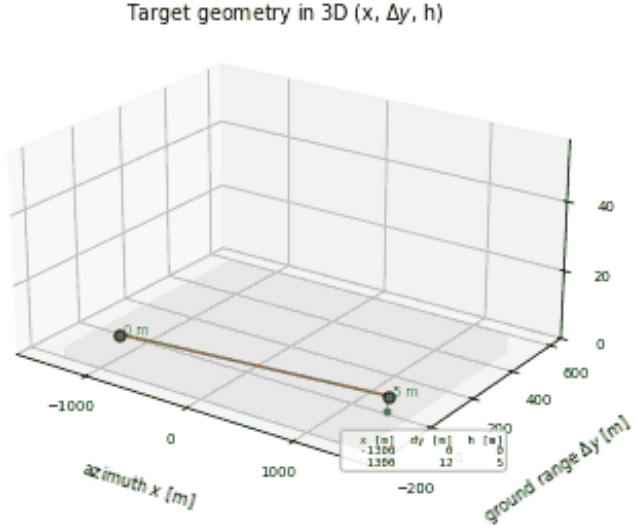
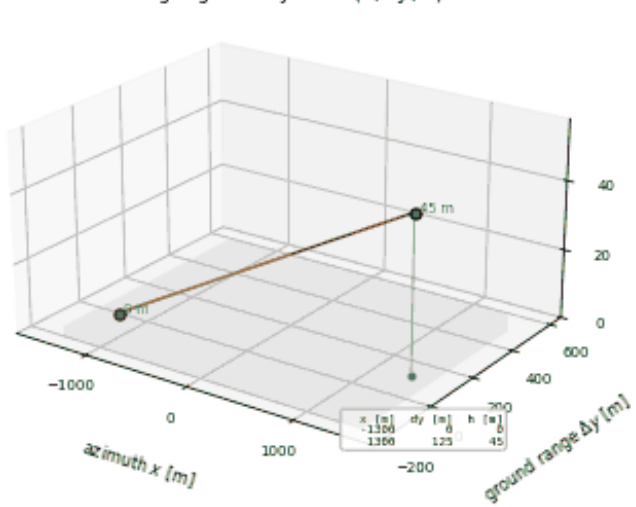



RA-NL-002 | SATA 1D | along-track ramp: N = 2, $\alpha = 1^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

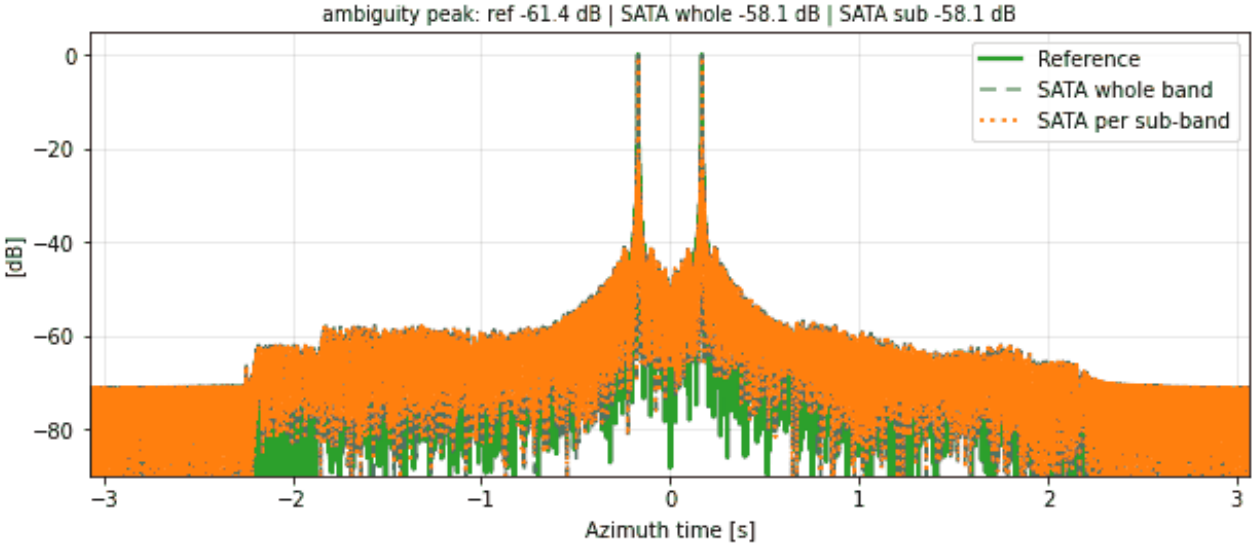

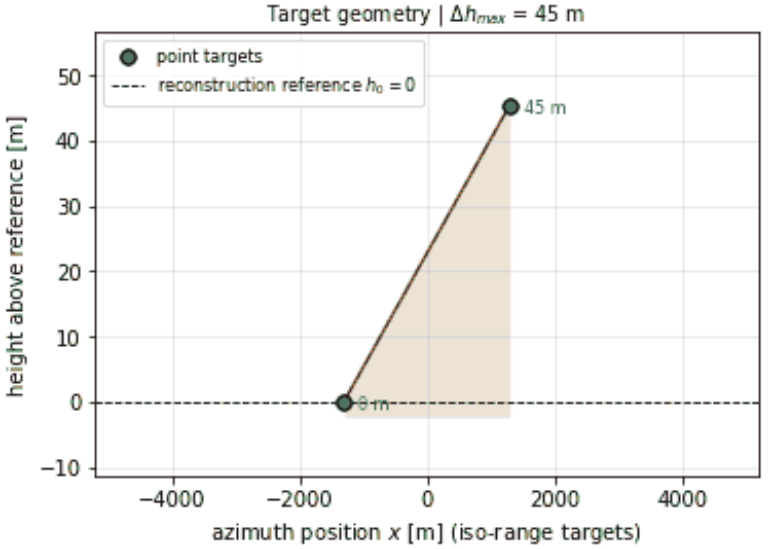



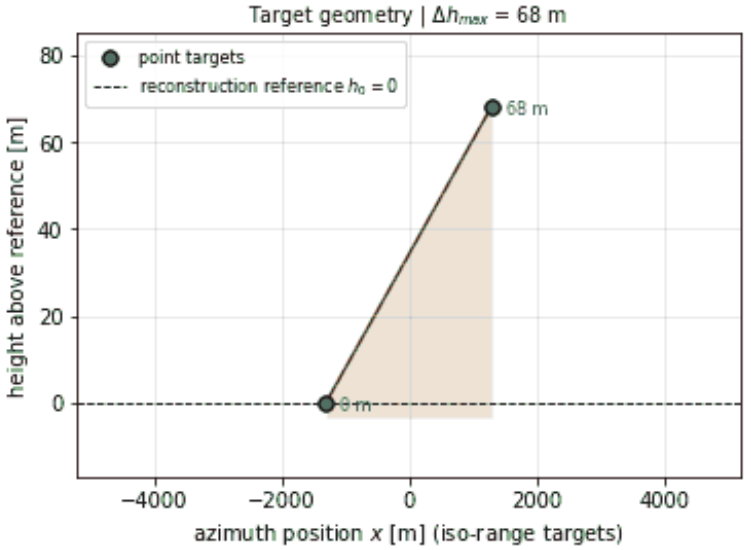



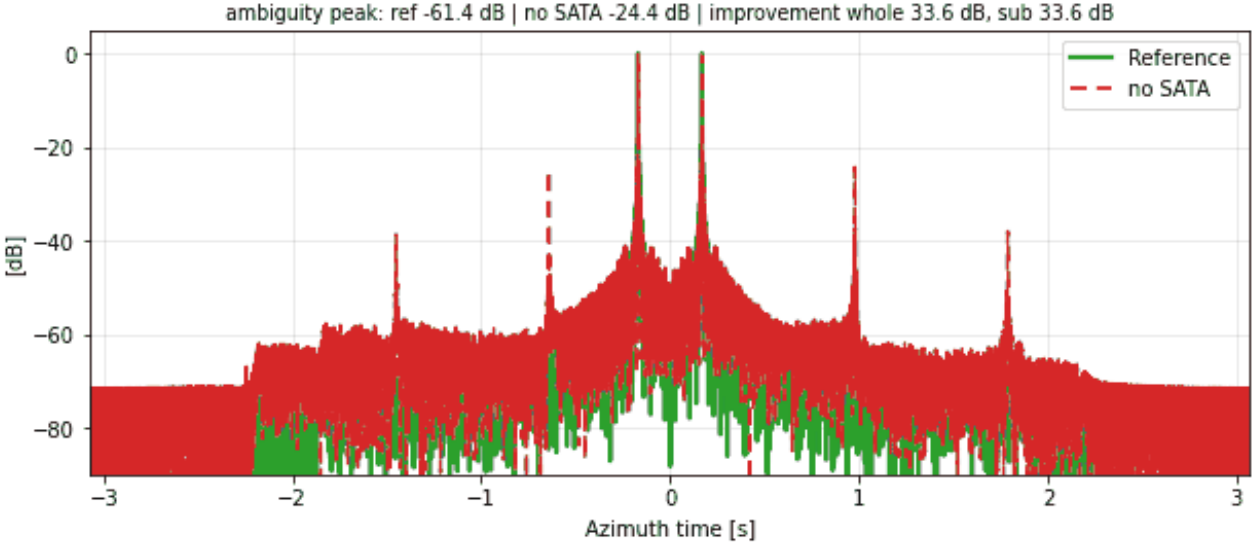



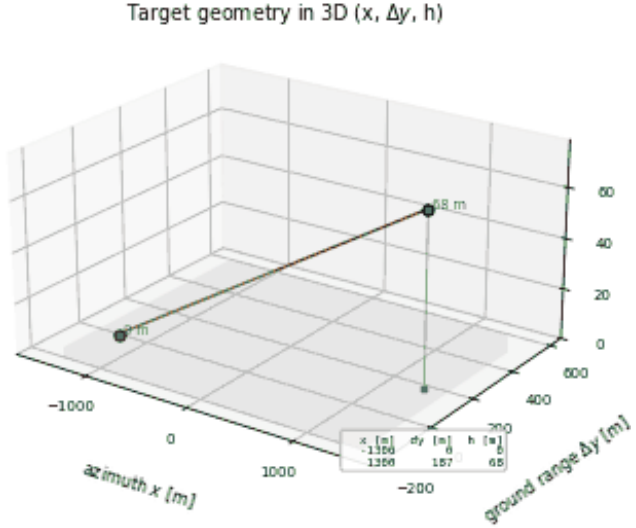
RA-NL-003 | SATA 1D | along-track ramp: N = 2, $\alpha = 1.5^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

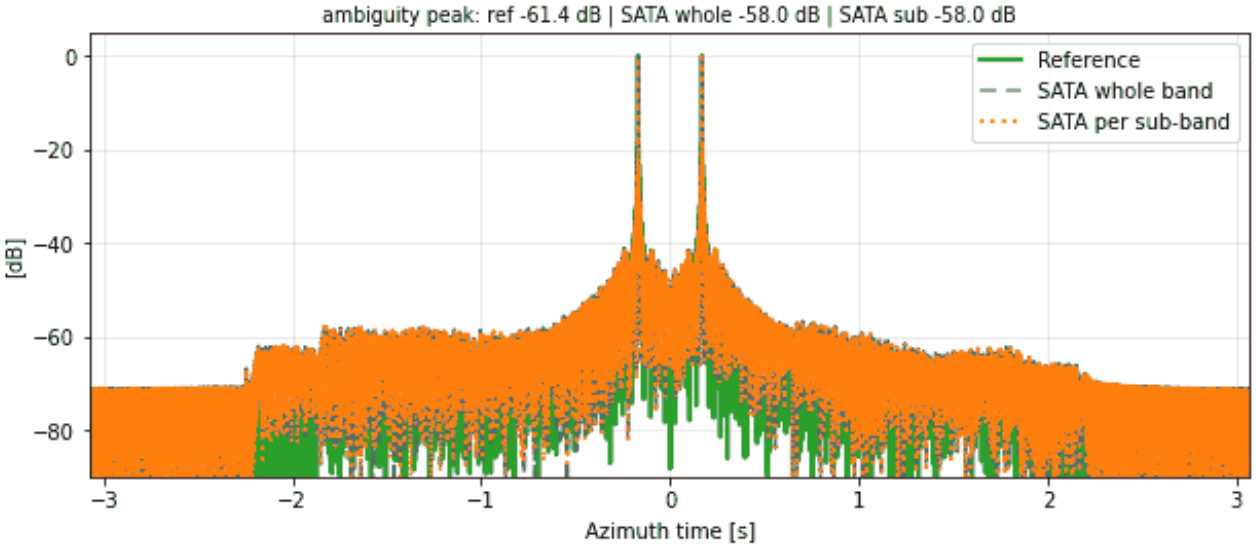





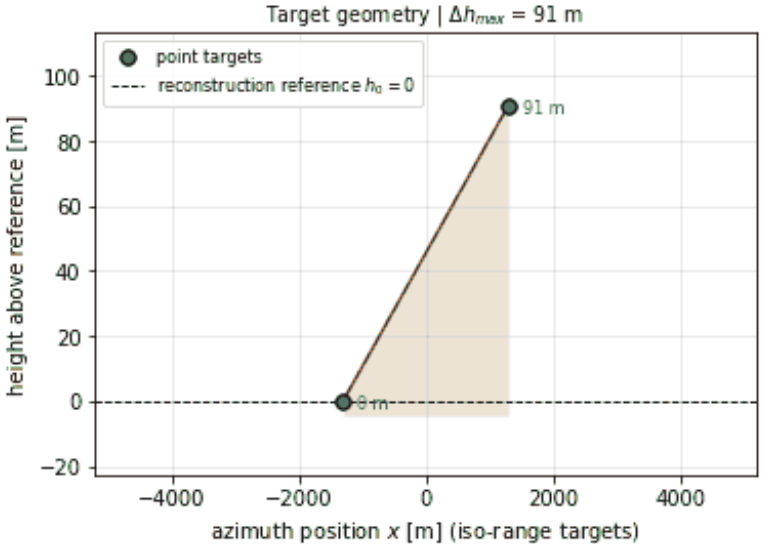



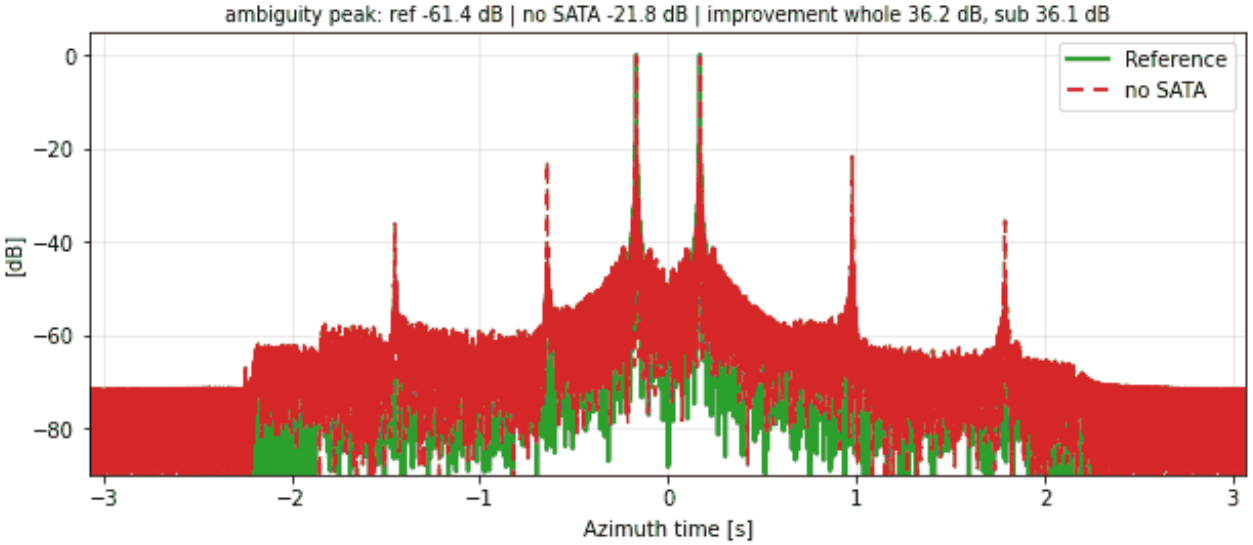



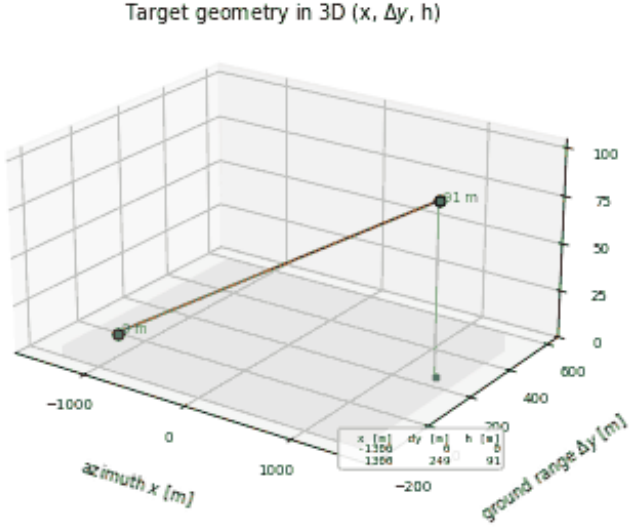
RA-NL-004 | SATA 1D | along-track ramp: N = 2, $\alpha = 2^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

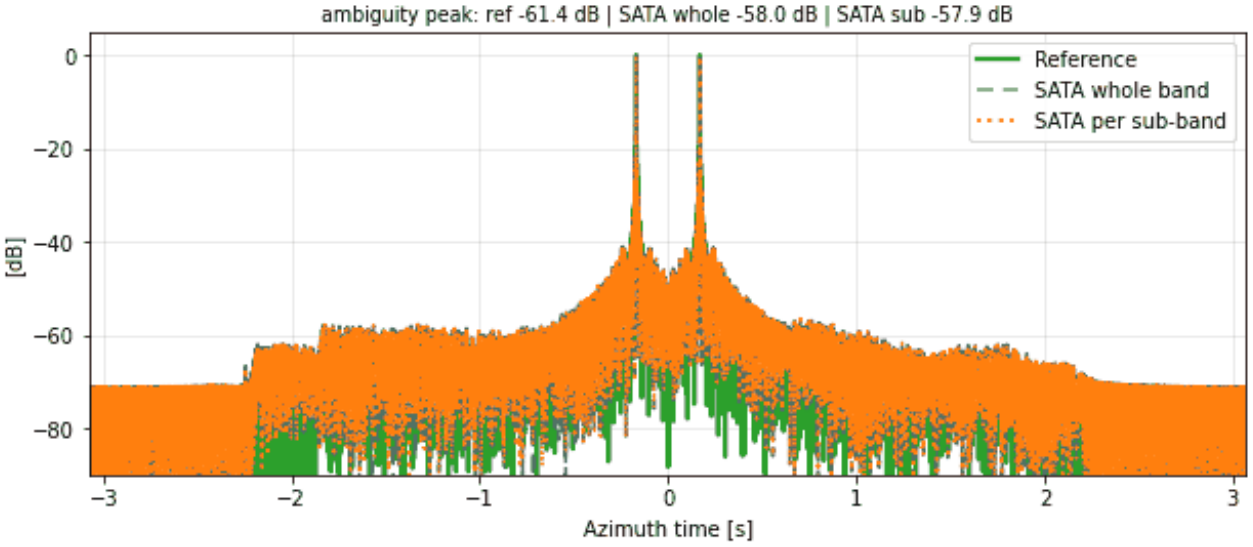





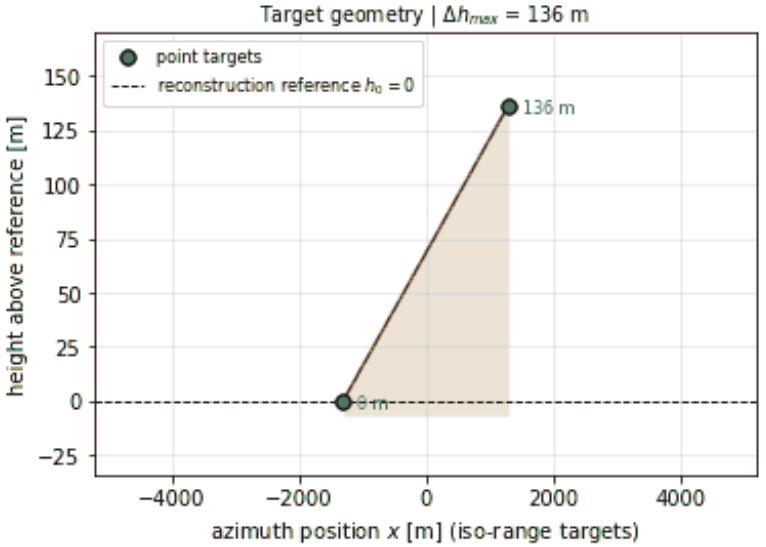



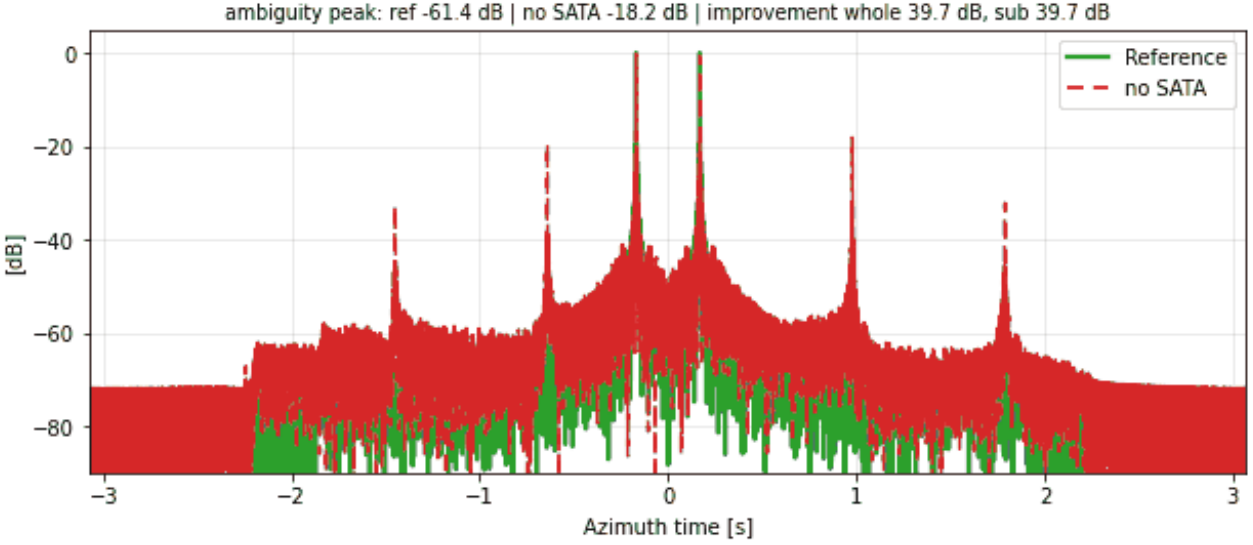



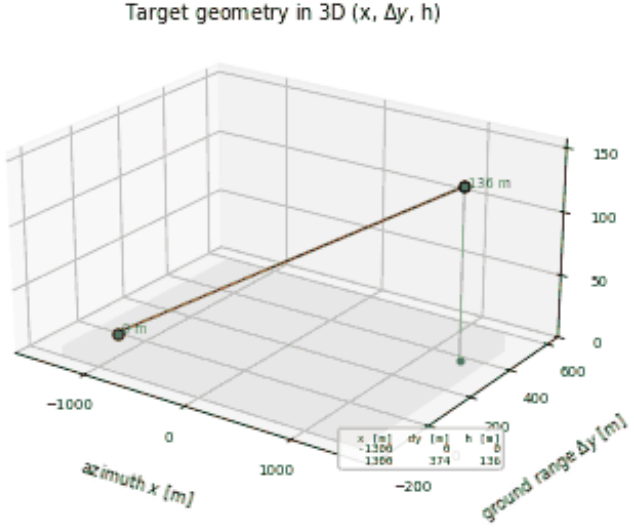
RA-NL-005 | SATA 1D | along-track ramp: N = 2, $\alpha = 3^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

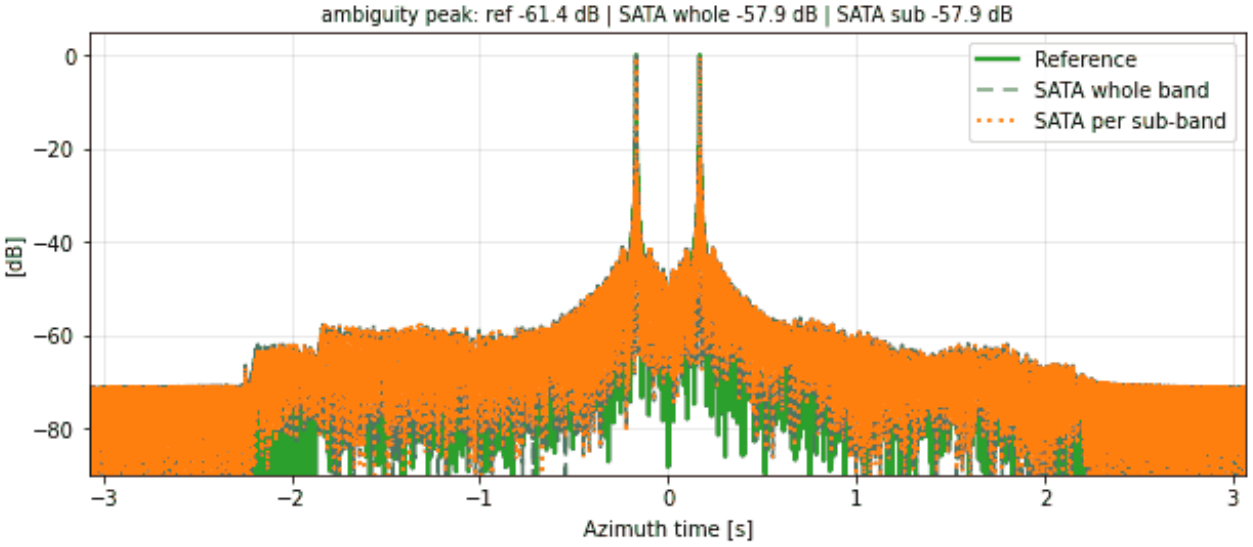





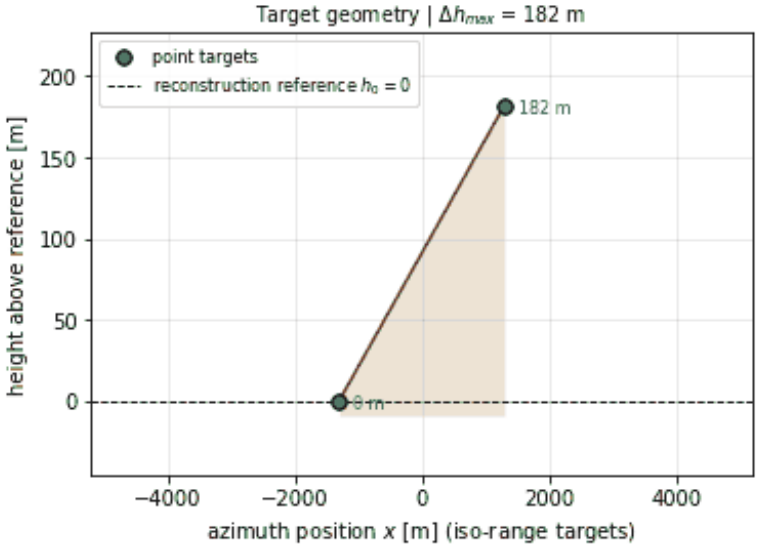



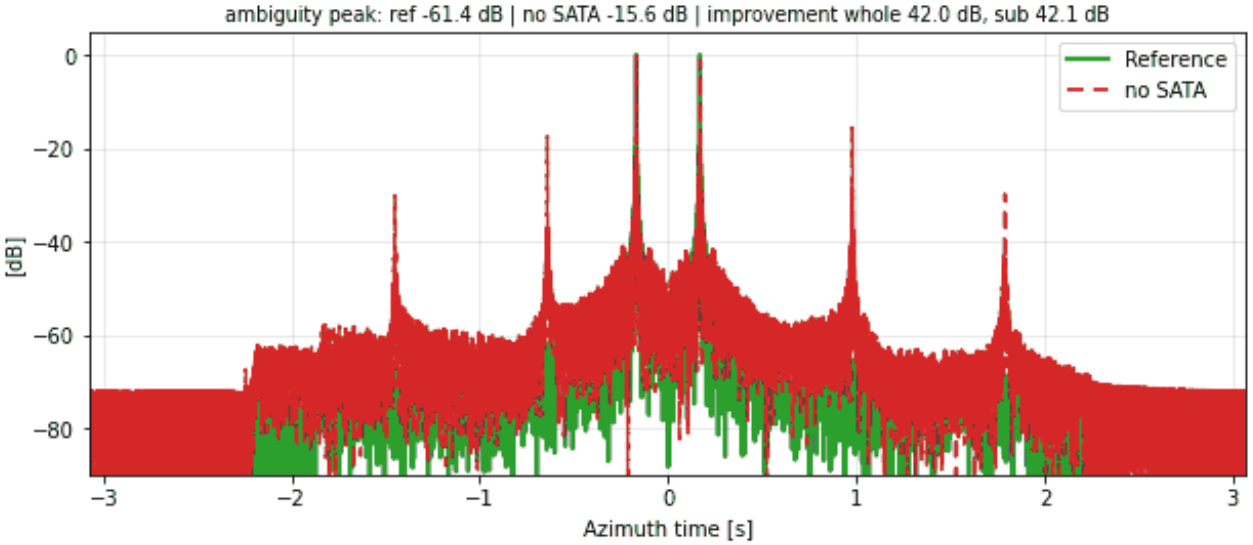



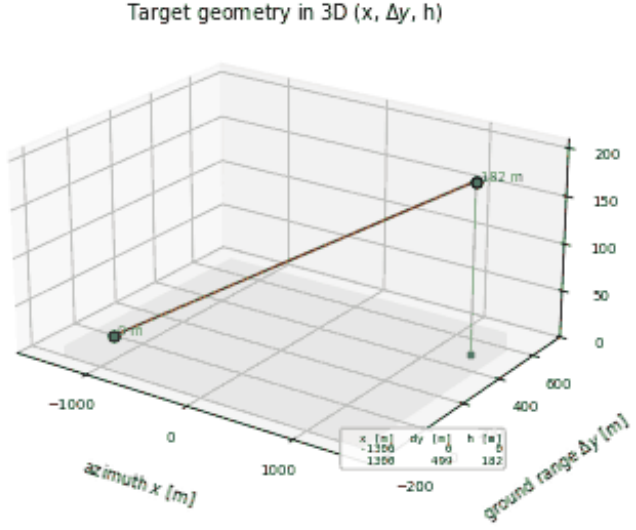
RA-NL-006 | SATA 1D | along-track ramp: N = 2, $\alpha = 4^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

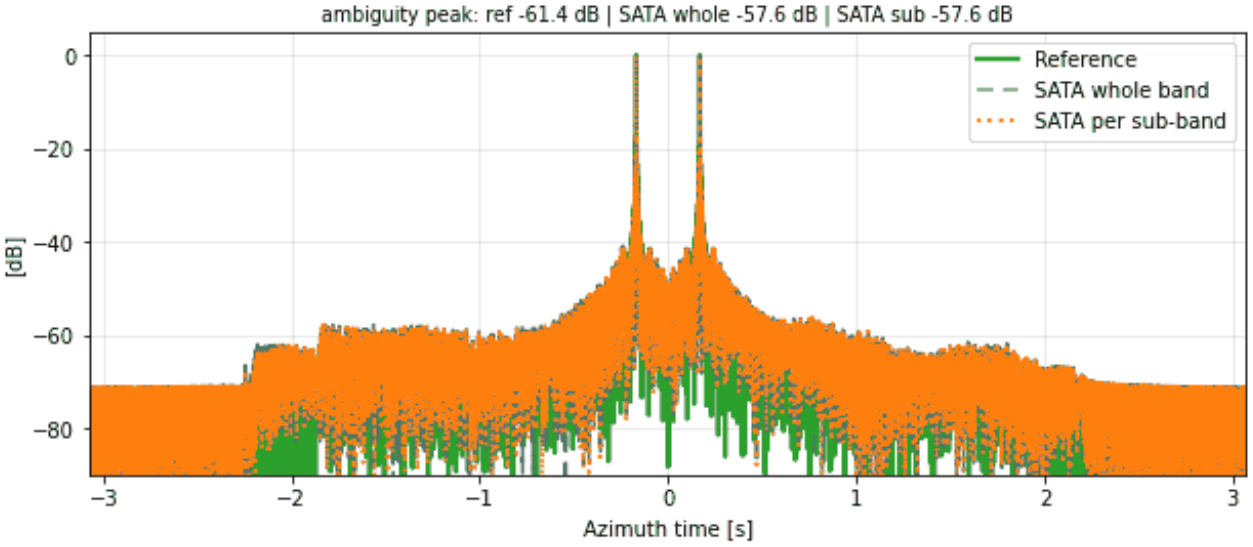





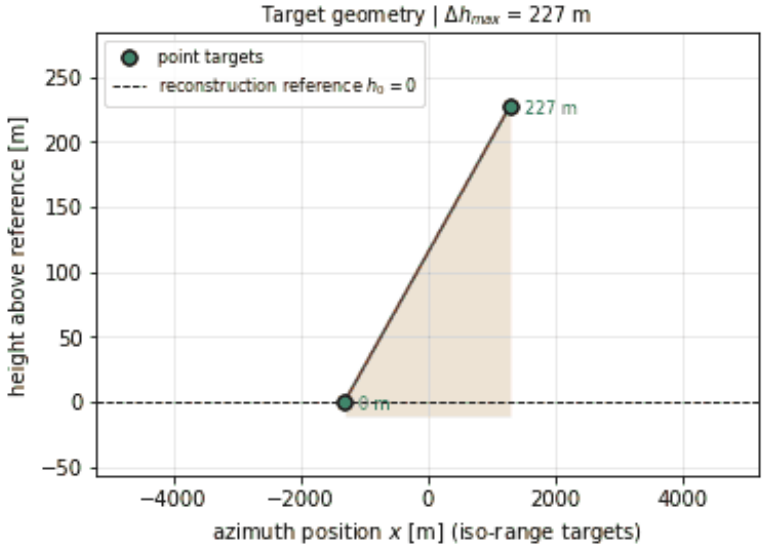



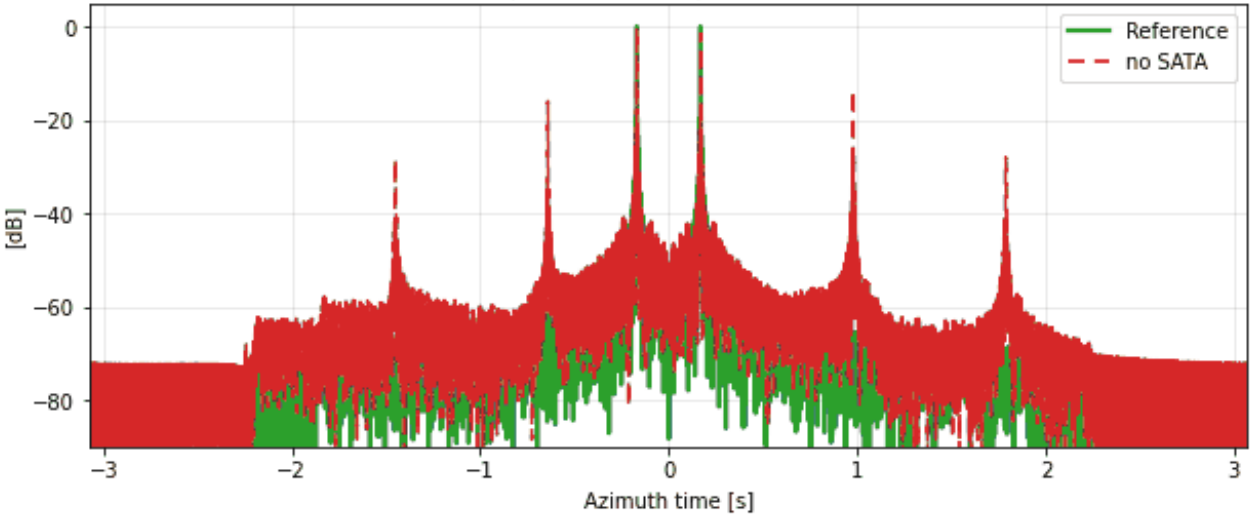



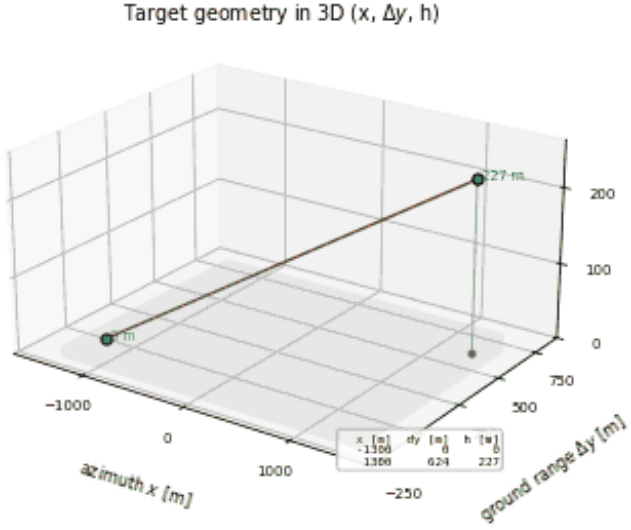
RA-NL-007 | SATA 1D | along-track ramp: N = 2, $\alpha = 5^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

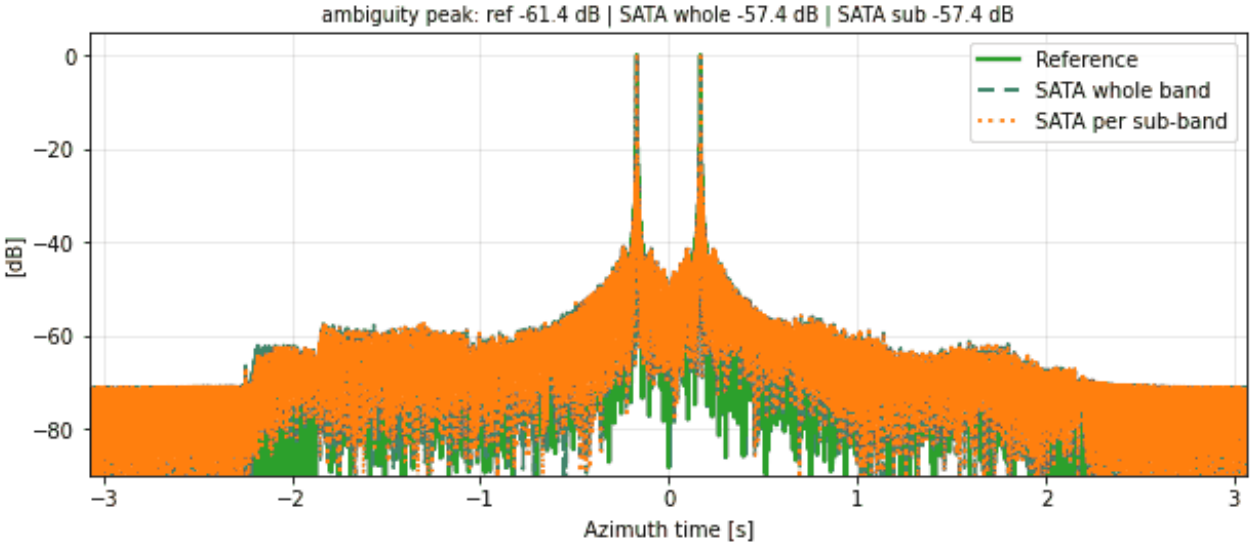






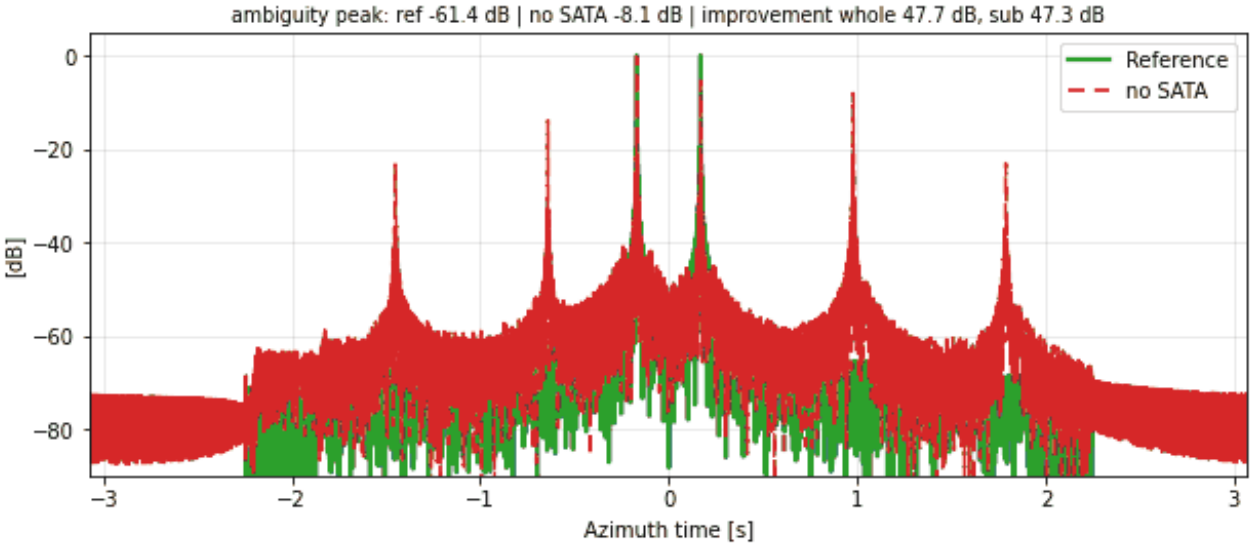



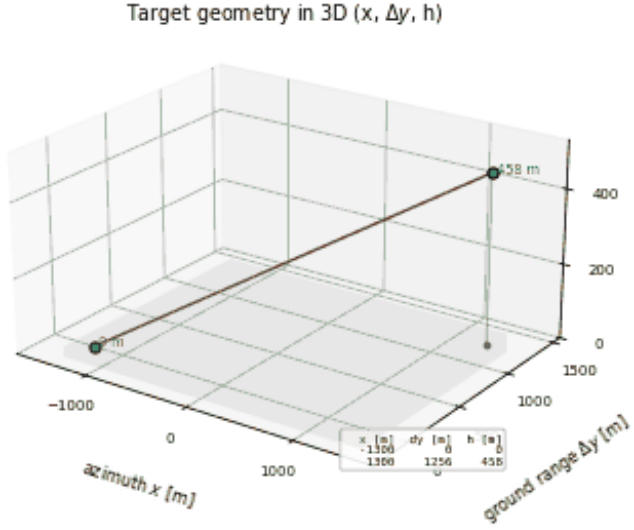



RA-NL-008 | SATA 1D | along-track ramp: N = 2, $\alpha = 10^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

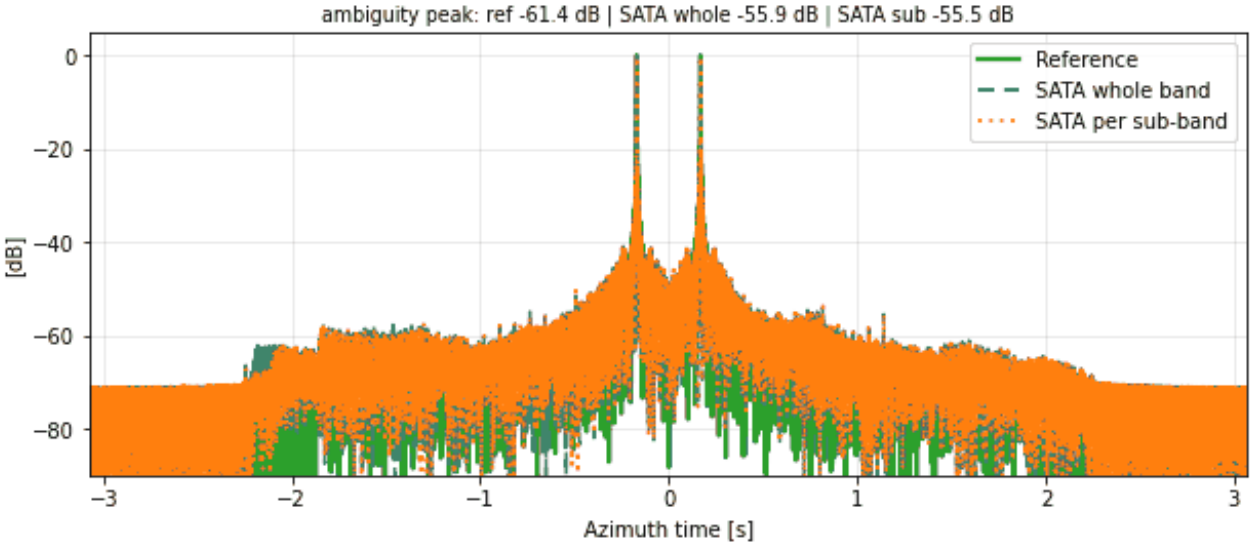


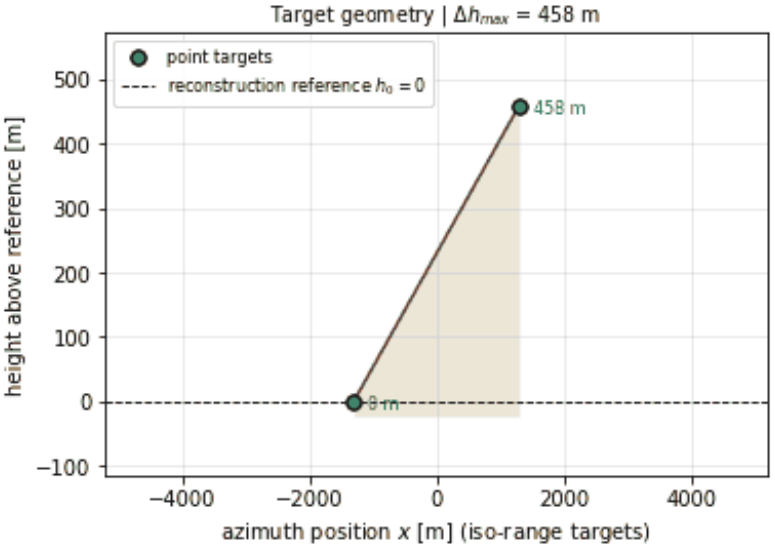



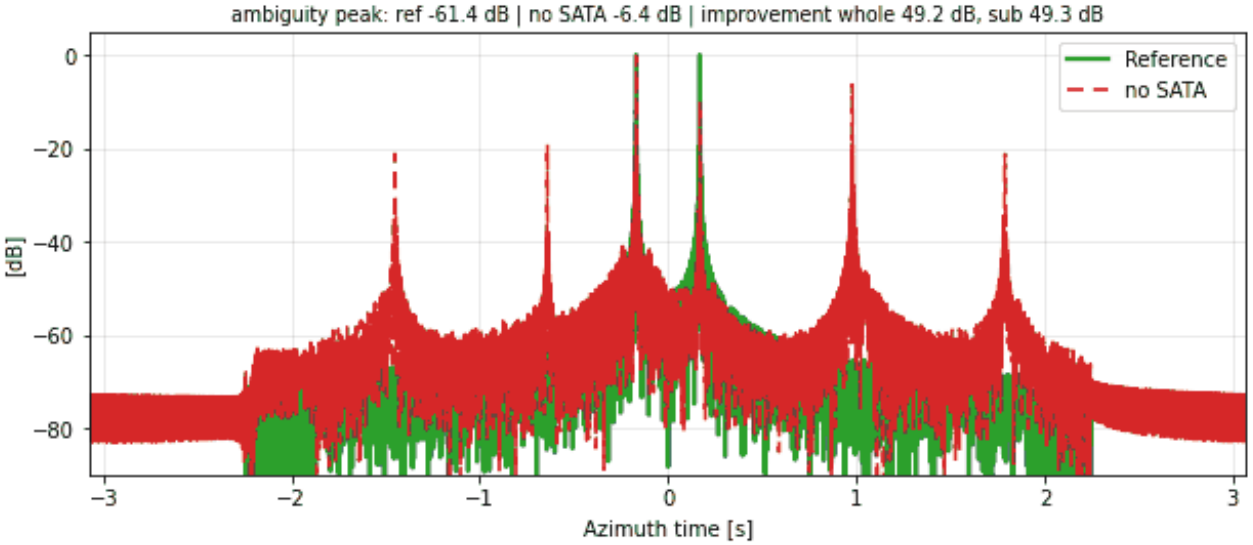



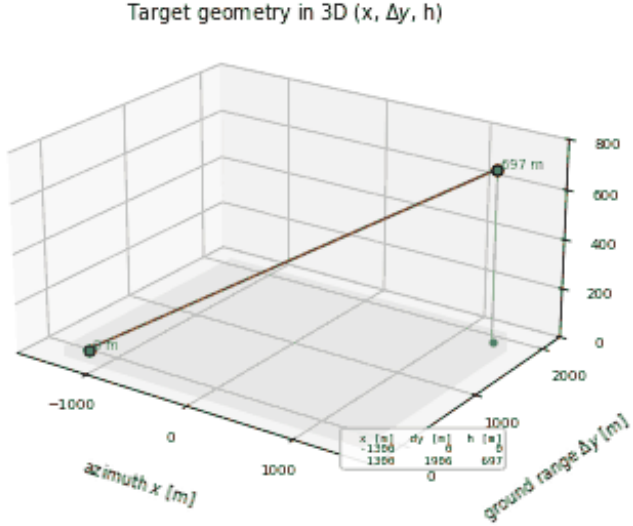



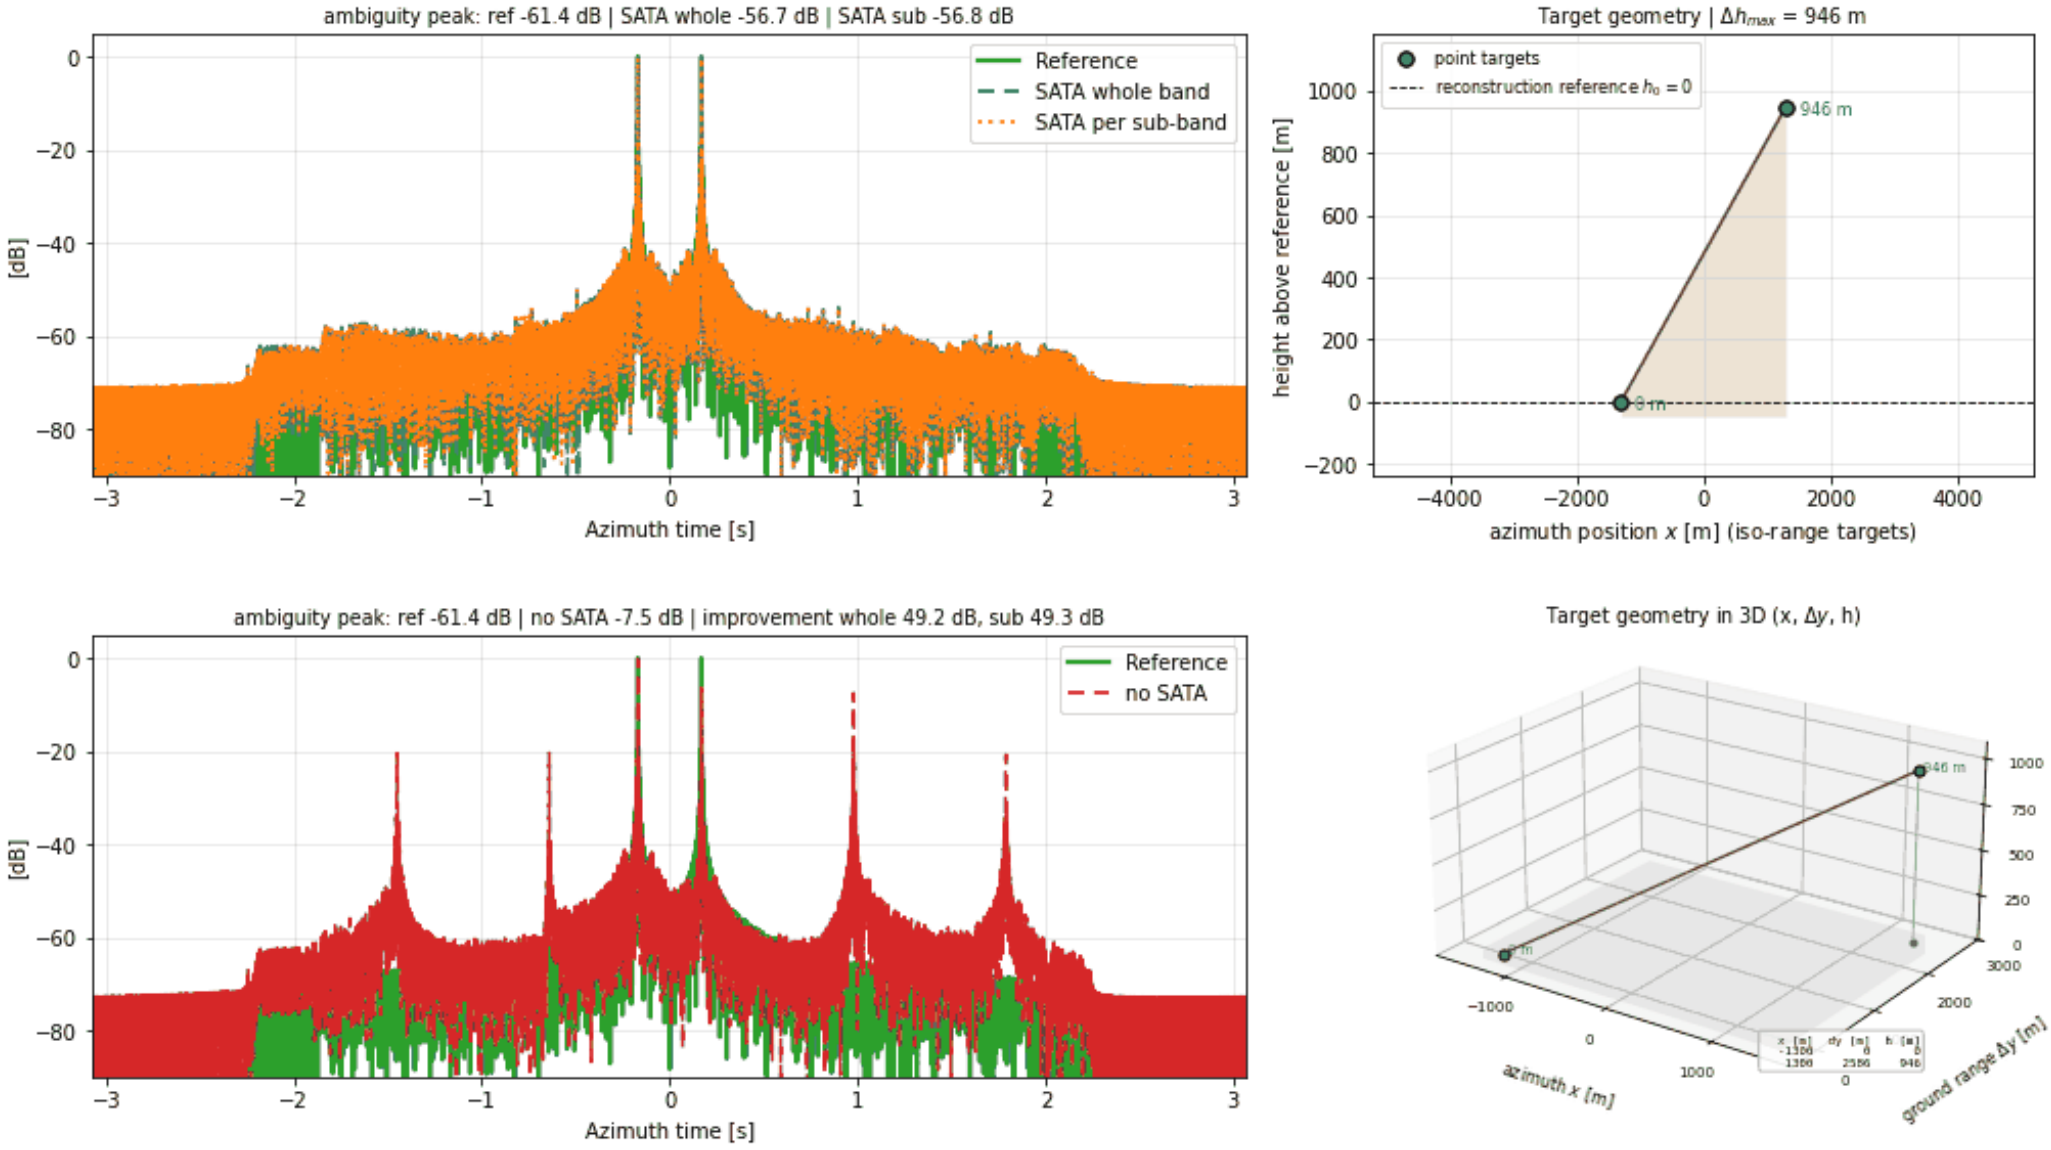
RA-NL-009 | SATA 1D | along-track ramp: N = 2, $\alpha = 15^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

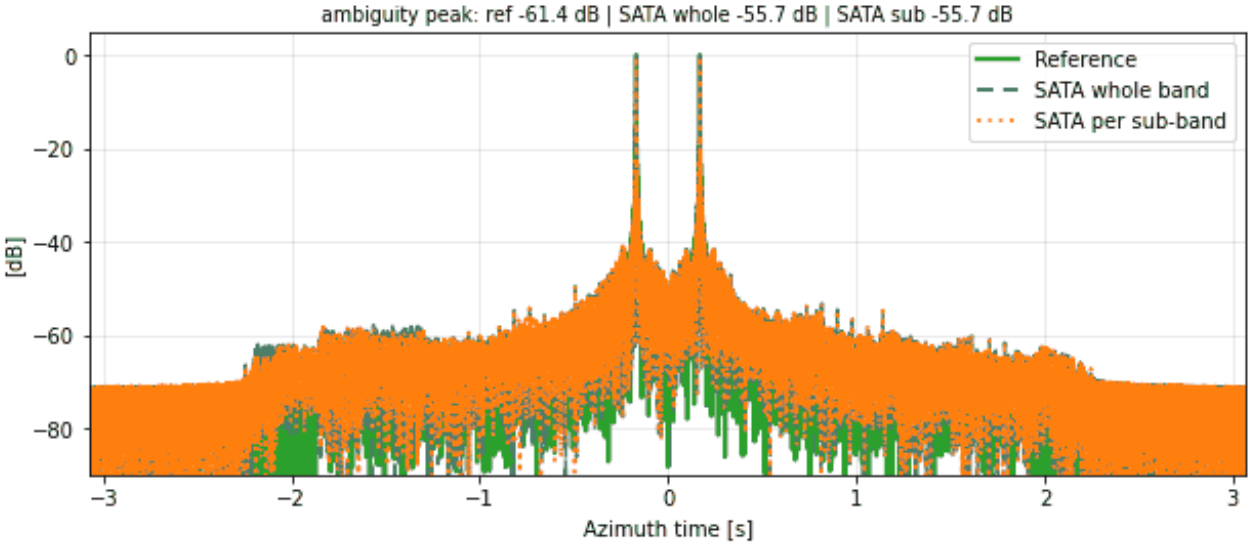

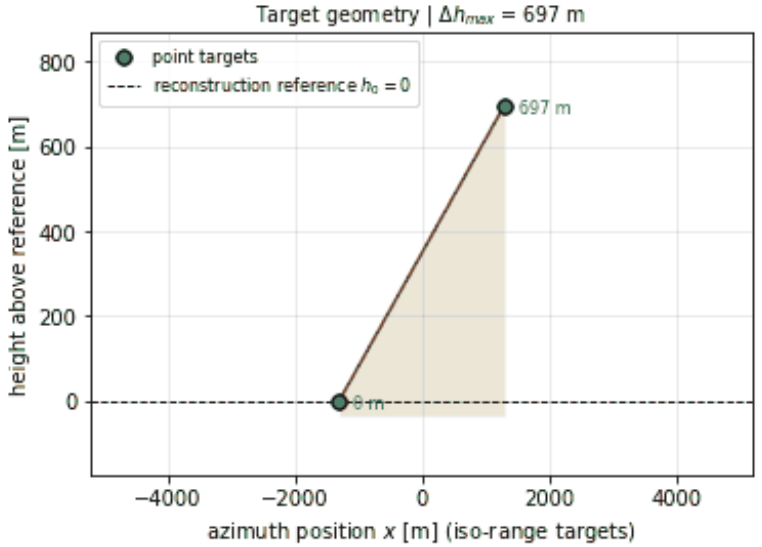



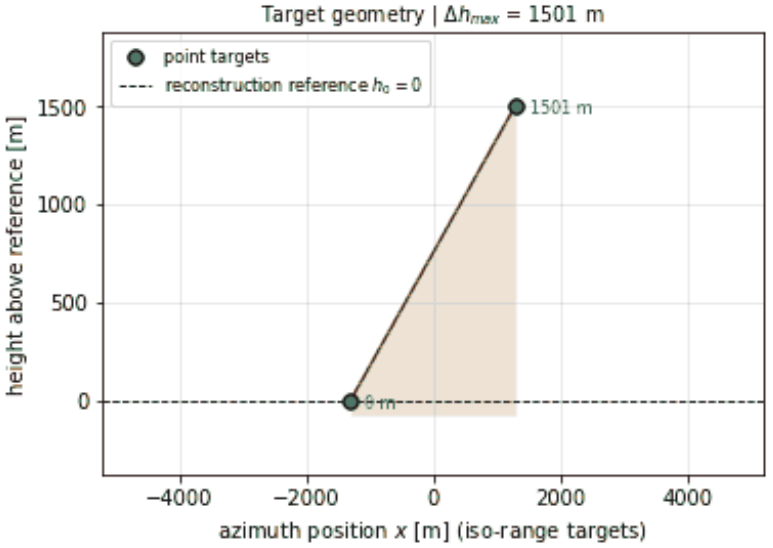



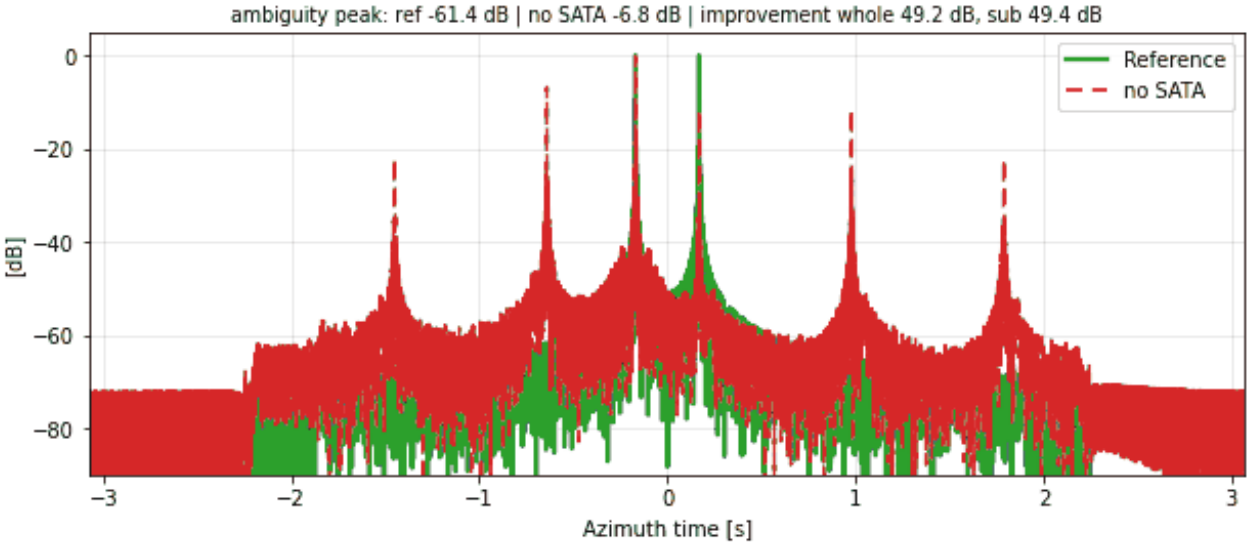

RA-NL-010 | SATA 1D | along-track ramp: N = 2, α = 20° (heights j·2600tan α), targets 2.6 km apart (normal distance), large heights
b_xt = [63.7, 27.0, 4.1, 1.7] m | N_rx = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_at = 7.69 m (DPCA)
ambiguity peak: ref -61.4 dB | SATA whole -56.7 dB | SATA sub -56.8 dB
Reference
SATA whole band
SATA per sub-band
[dB]
Azimuth time [s]
Target geometry | Δh_max = 946 m
point targets
reconstruction reference h₀ = 0
946 m
0 m
height above reference [m]
azimuth position x [m] (iso-range targets)
ambiguity peak: ref -61.4 dB | no SATA -7.5 dB | improvement whole 49.2 dB, sub 49.3 dB
Reference
no SATA
[dB]
Azimuth time [s]
Target geometry in 3D (x, Δy, h)
946 m
azimuth x [m]
ground range Δy [m]


RA-NL-011 | SATA 1D | along-track ramp: N = 2, $\alpha = 30^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

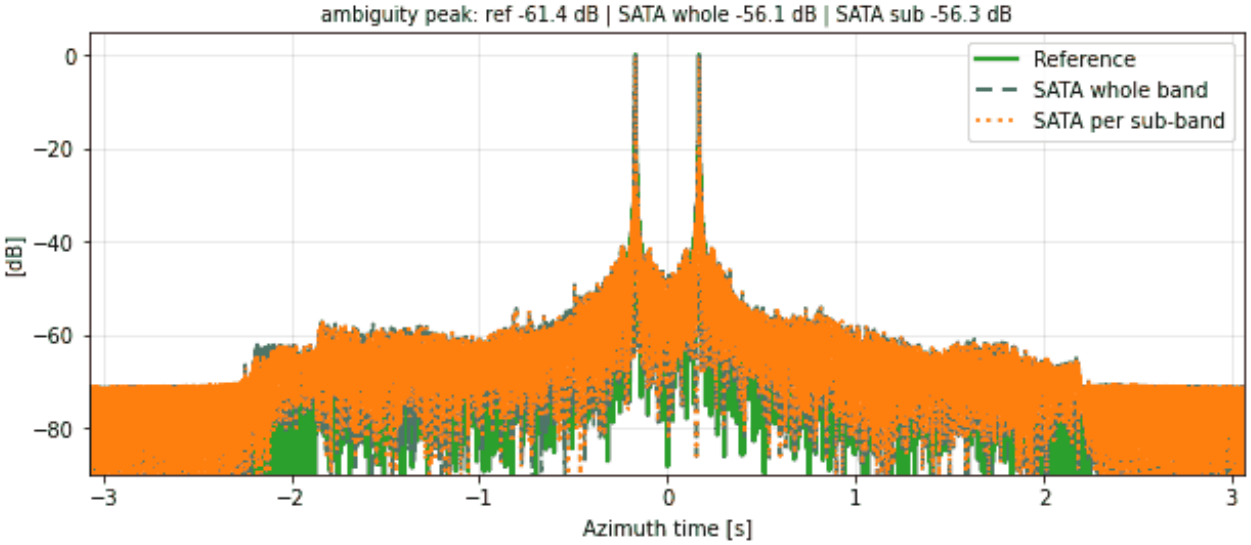





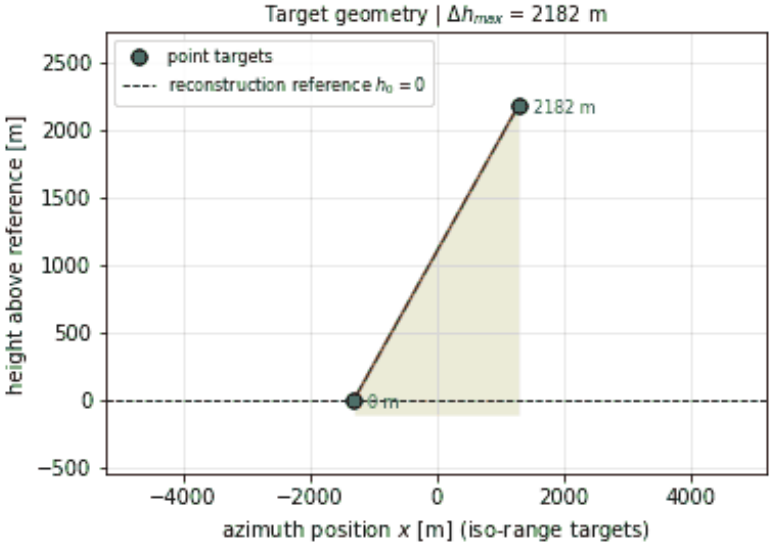


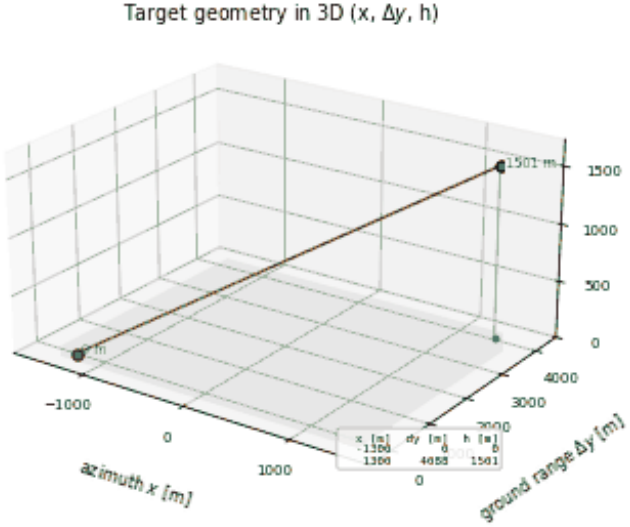
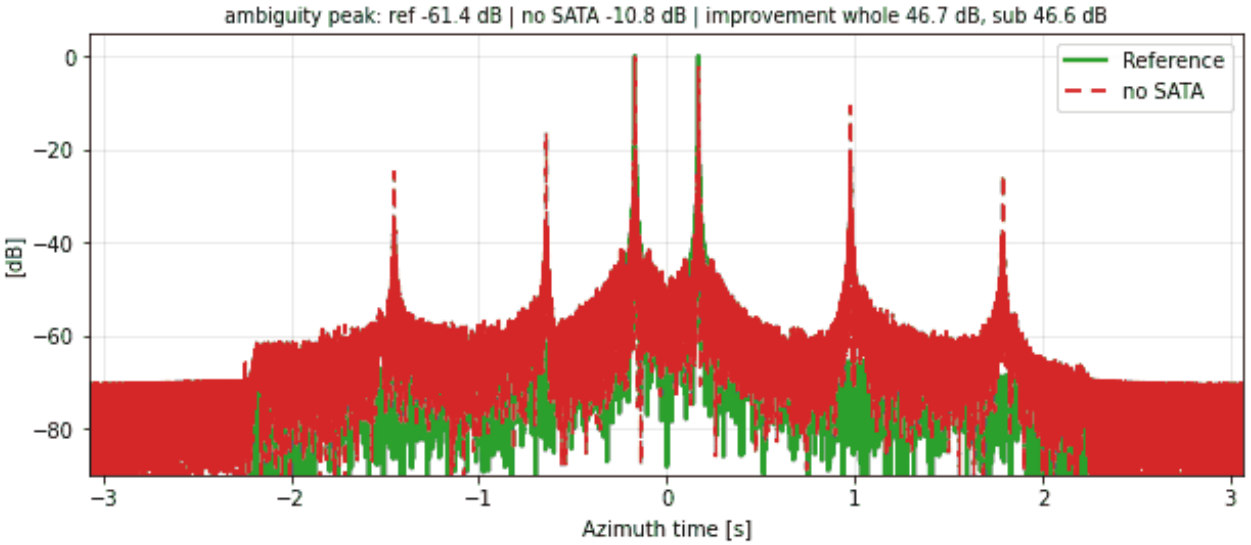



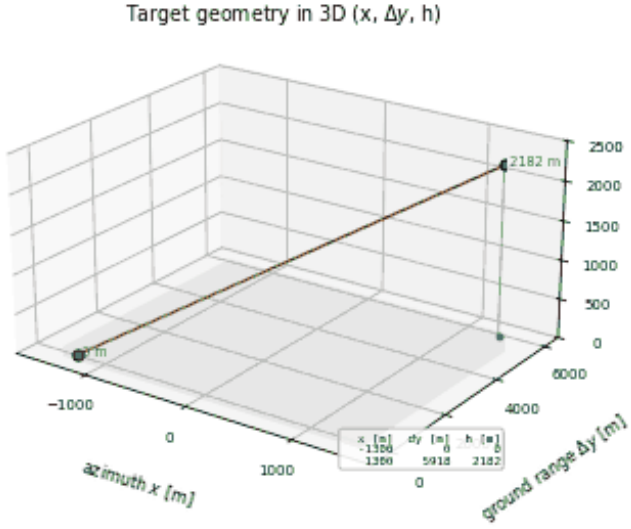
RA-NL-012 | SATA 1D | along-track ramp: N = 2, $\alpha = 40°$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

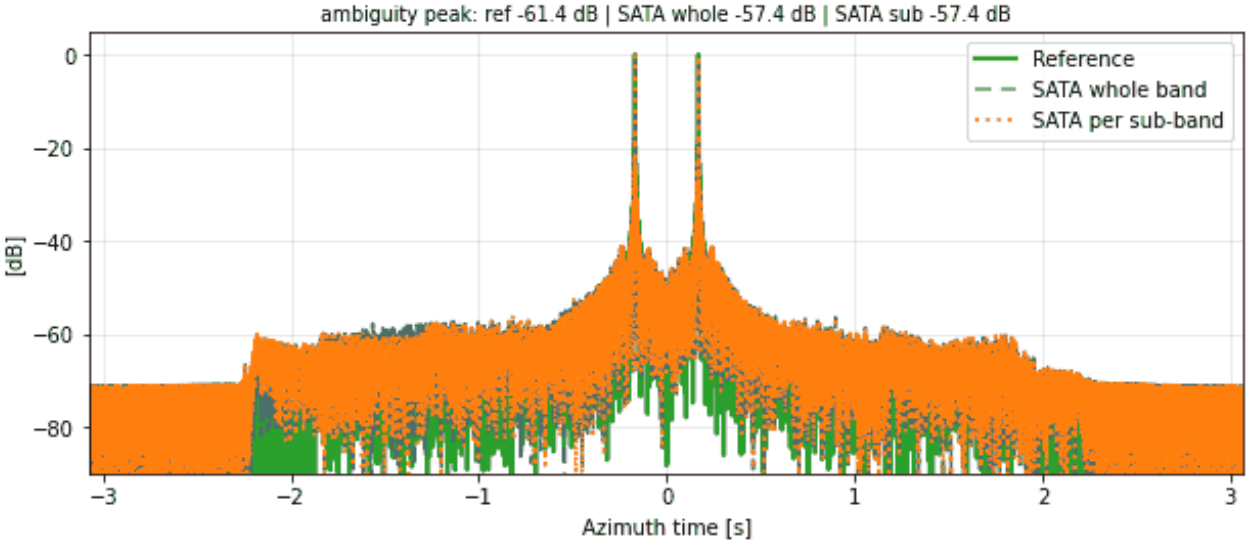





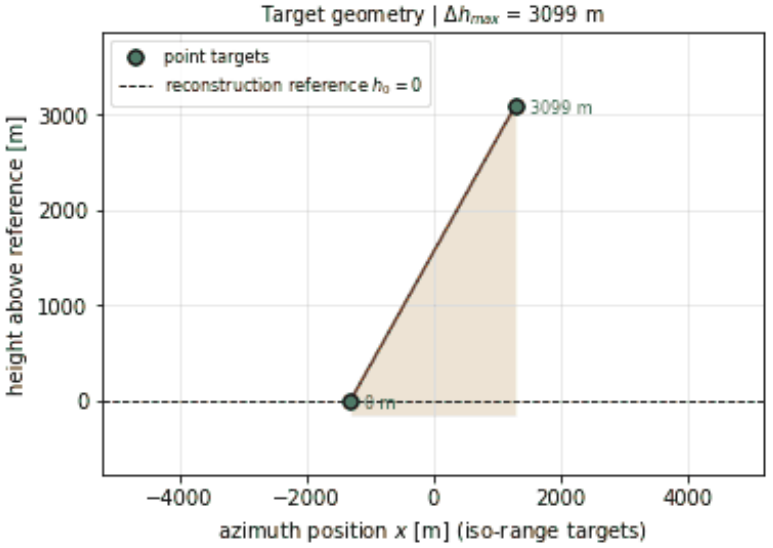



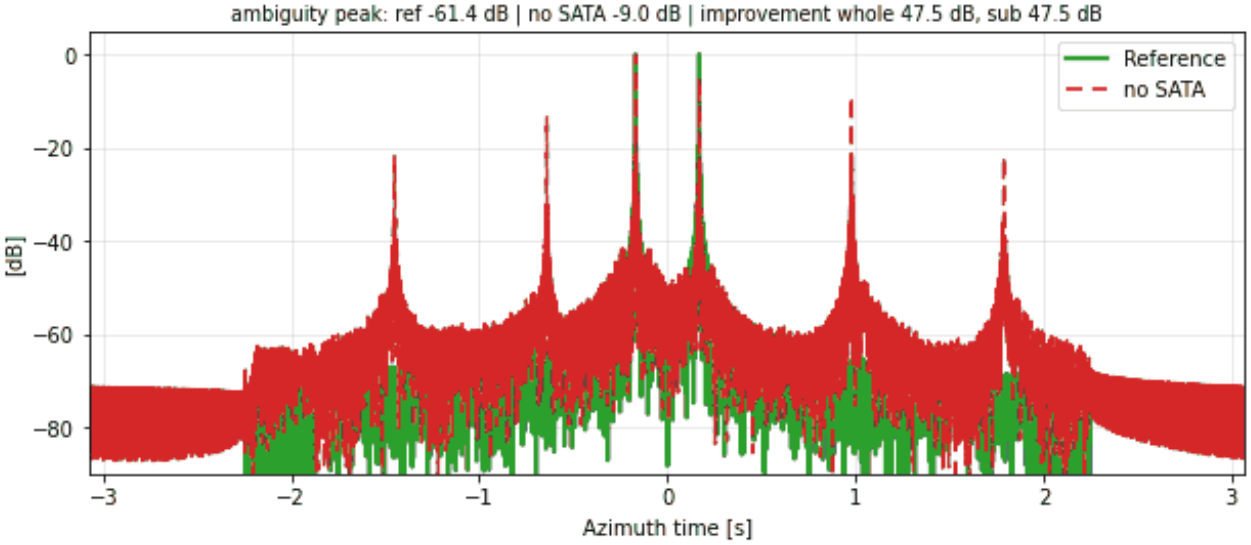



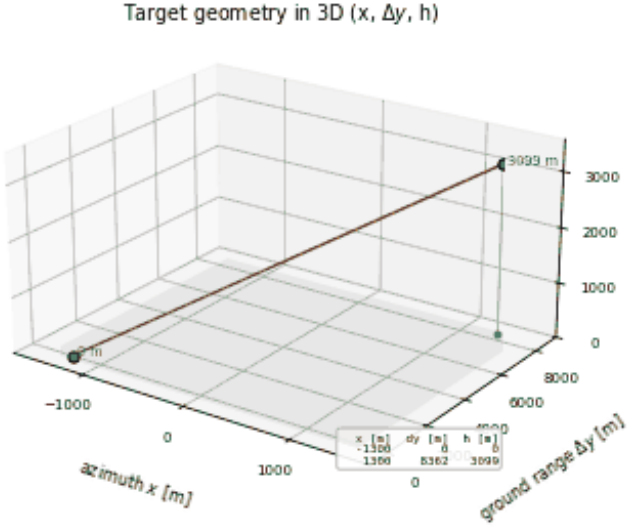
RA-NL-013 | SATA 1D | along-track ramp: N = 2, $\alpha = 50^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

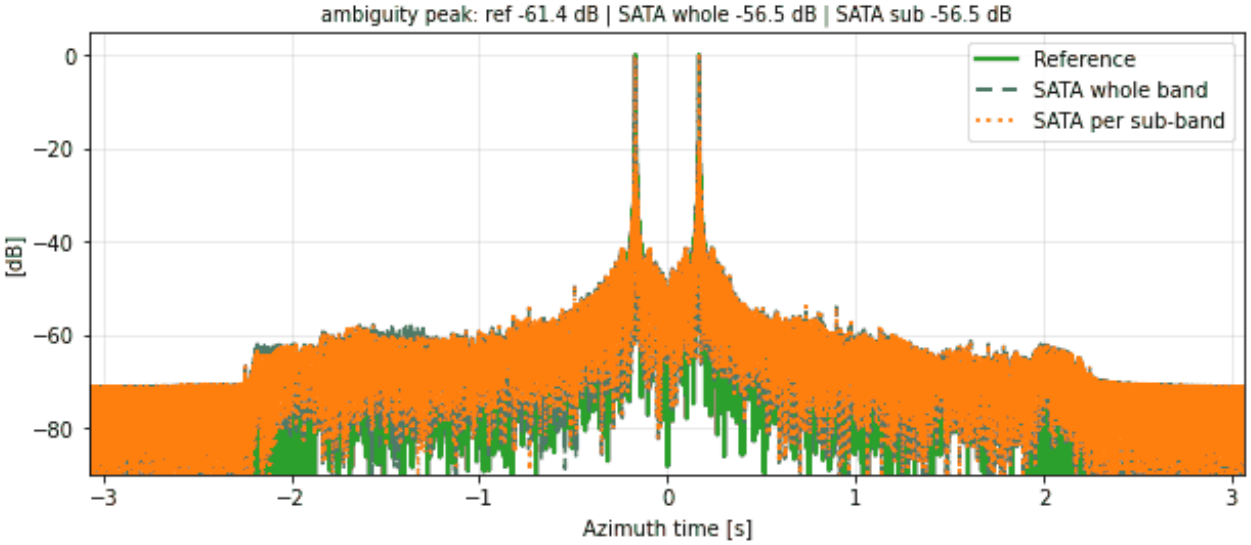





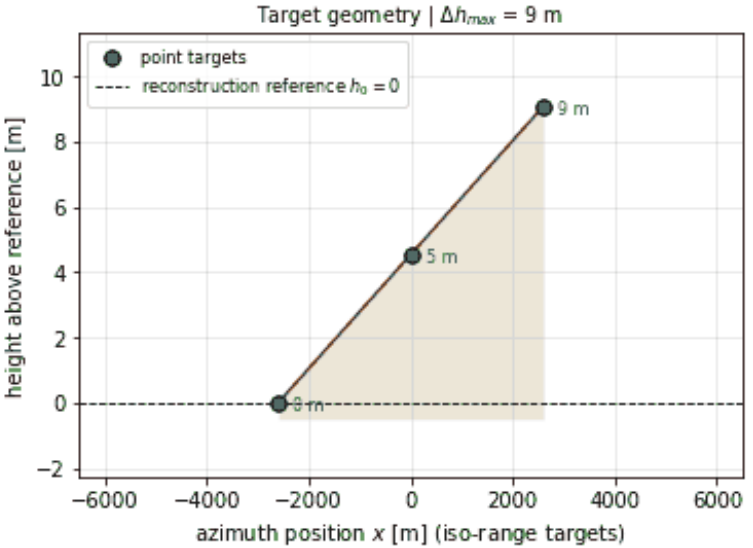



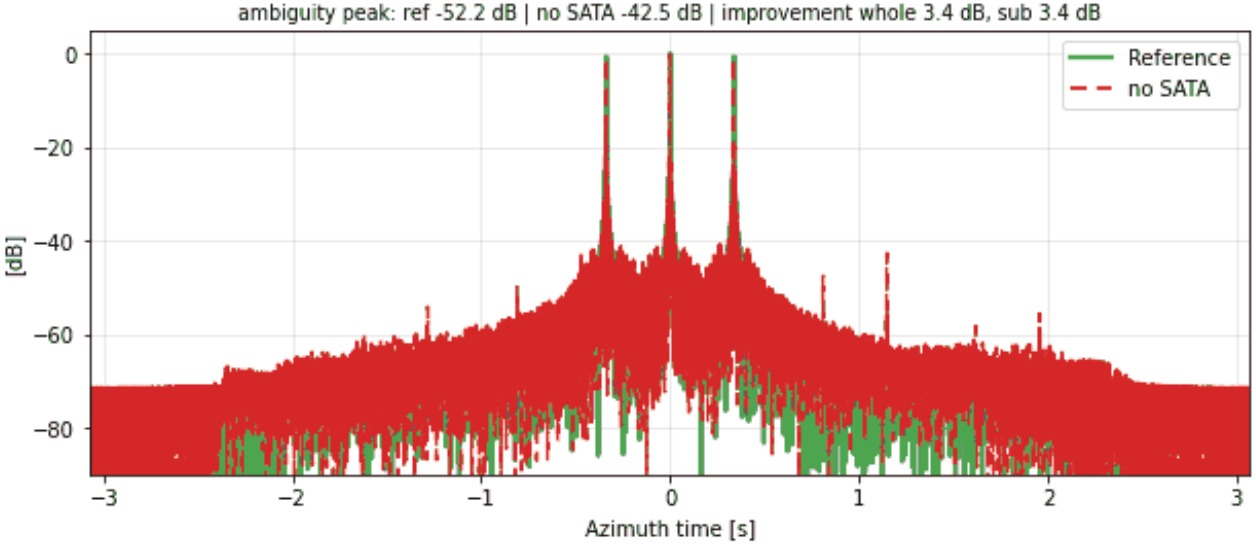



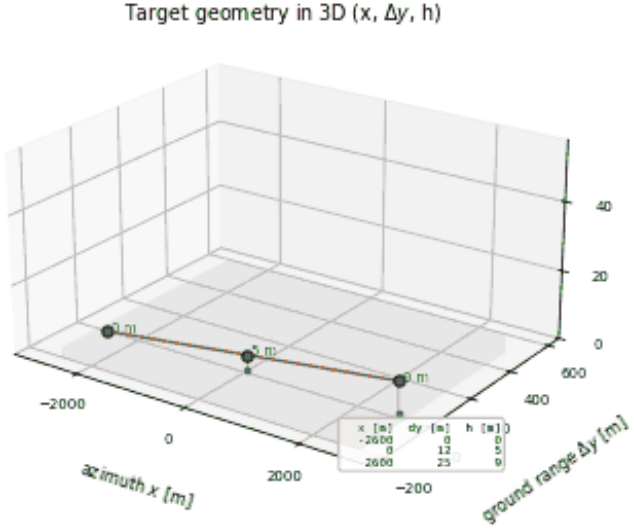
RA-NL-014 | SATA 1D | along-track ramp: N = 3, $\alpha = 0.1^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

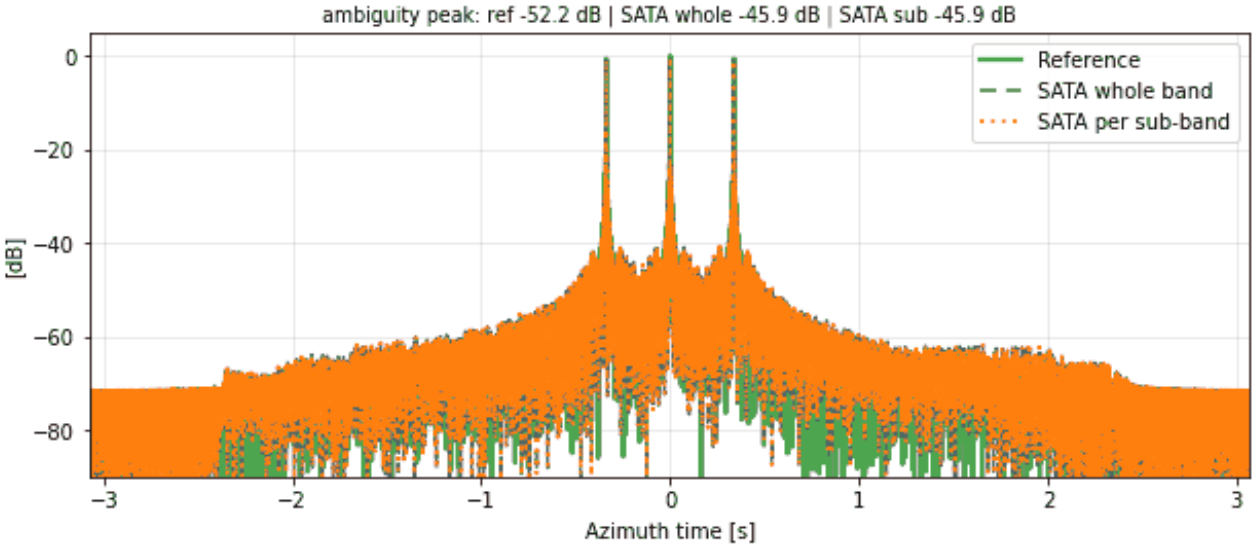





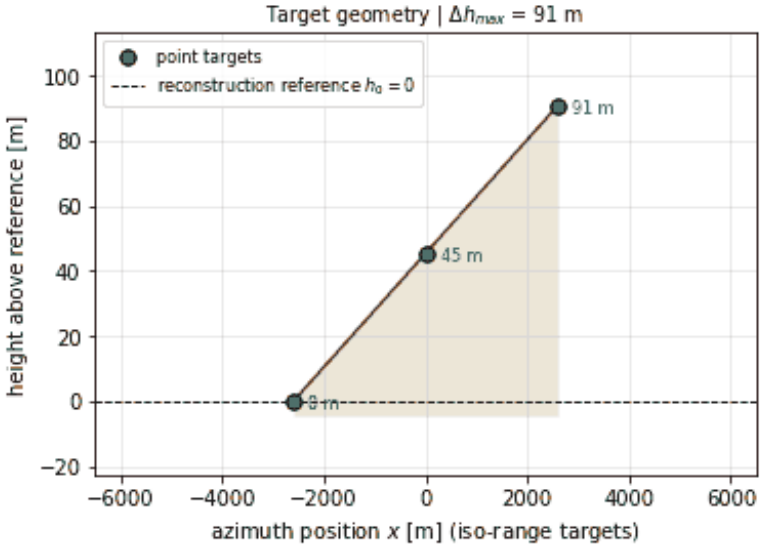



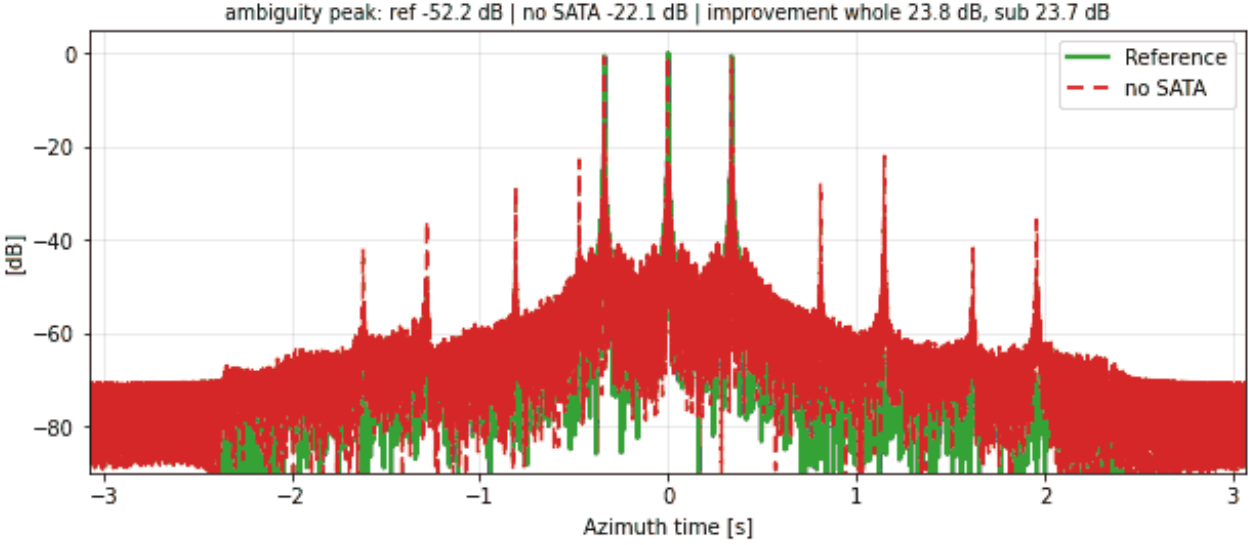



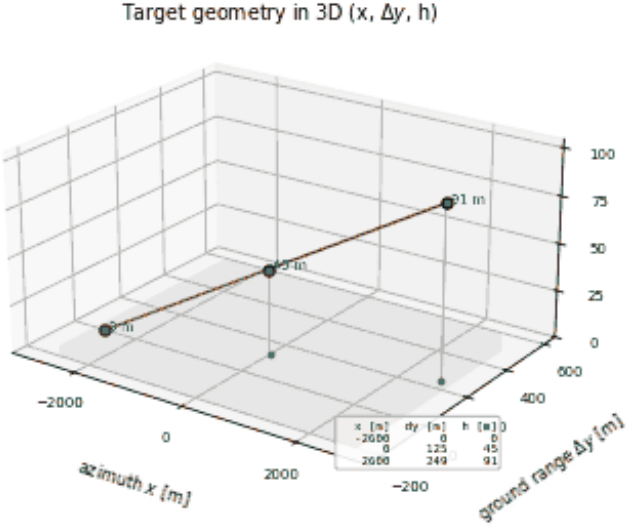
RA-NL-015 | SATA 1D | along-track ramp: N = 3, $\alpha = 1^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

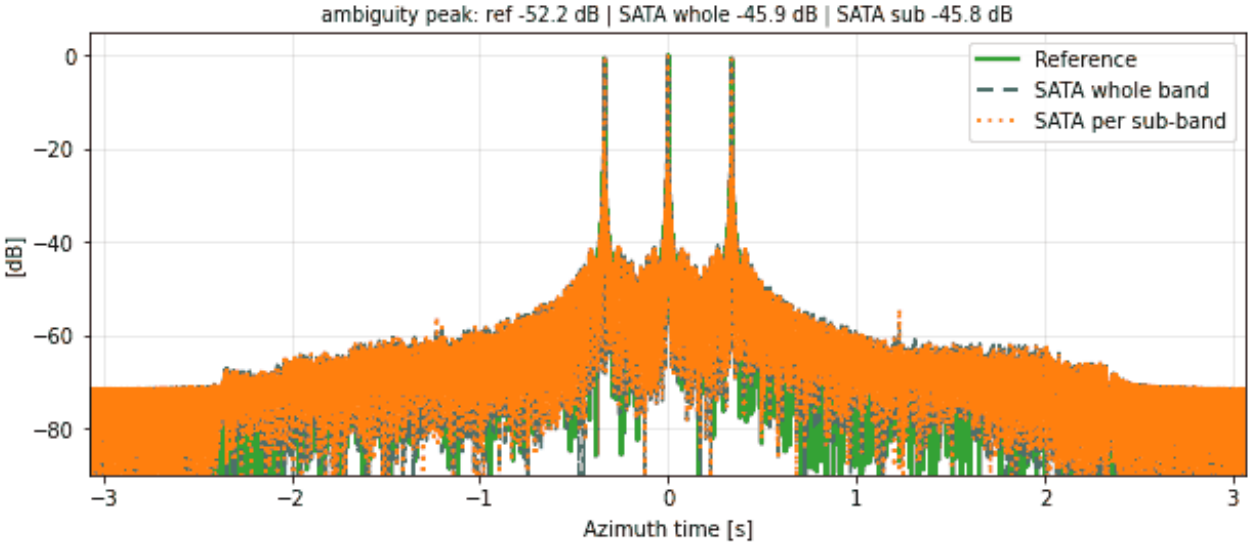





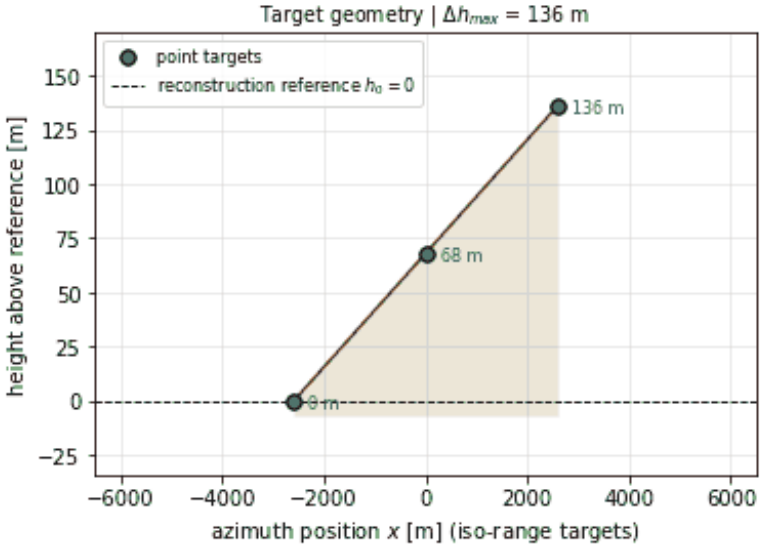



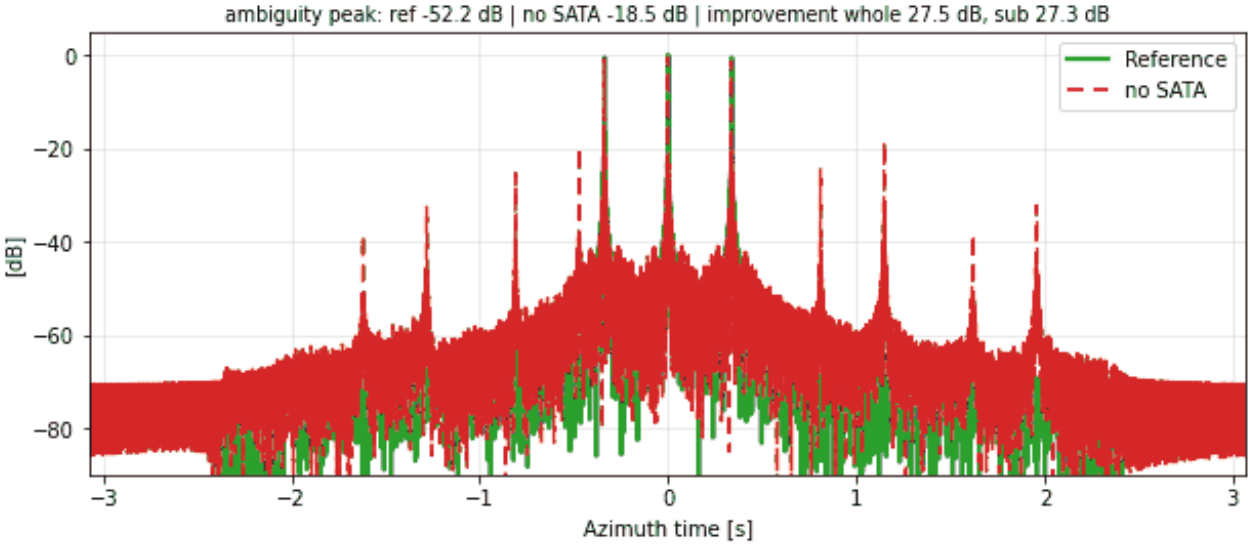



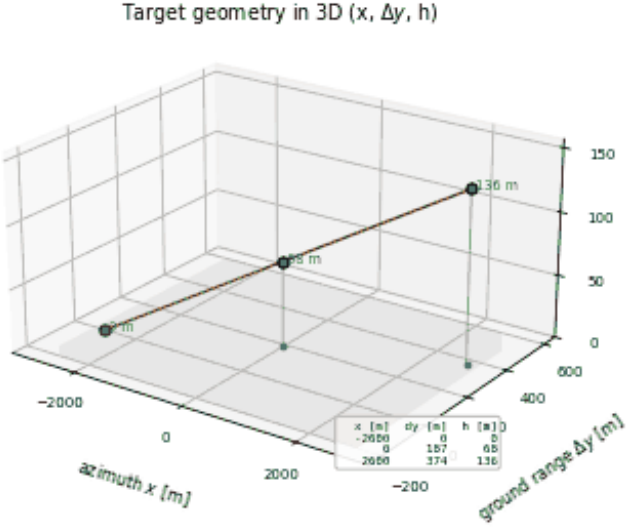
RA-NL-016 | SATA 1D | along-track ramp: N = 3, $\alpha = 1.5^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

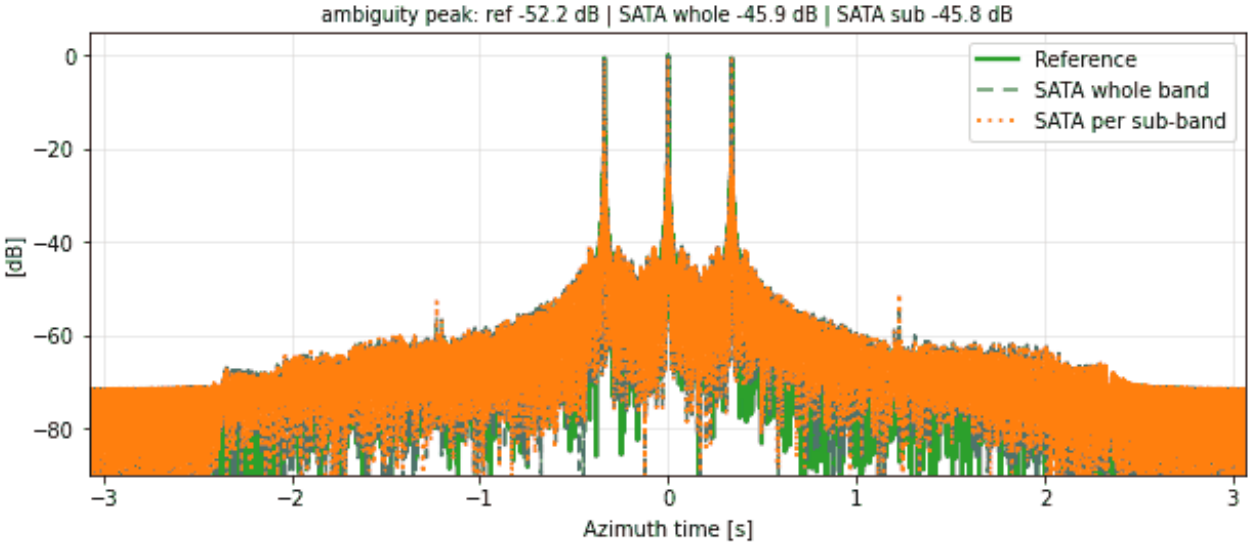





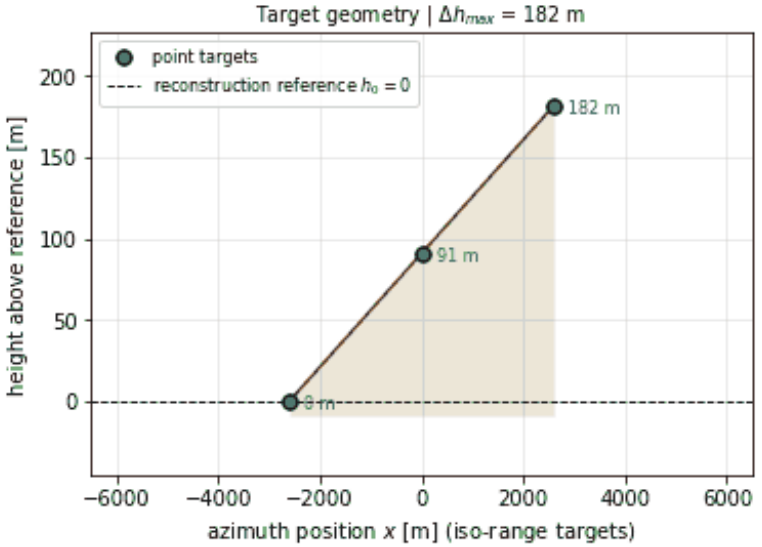



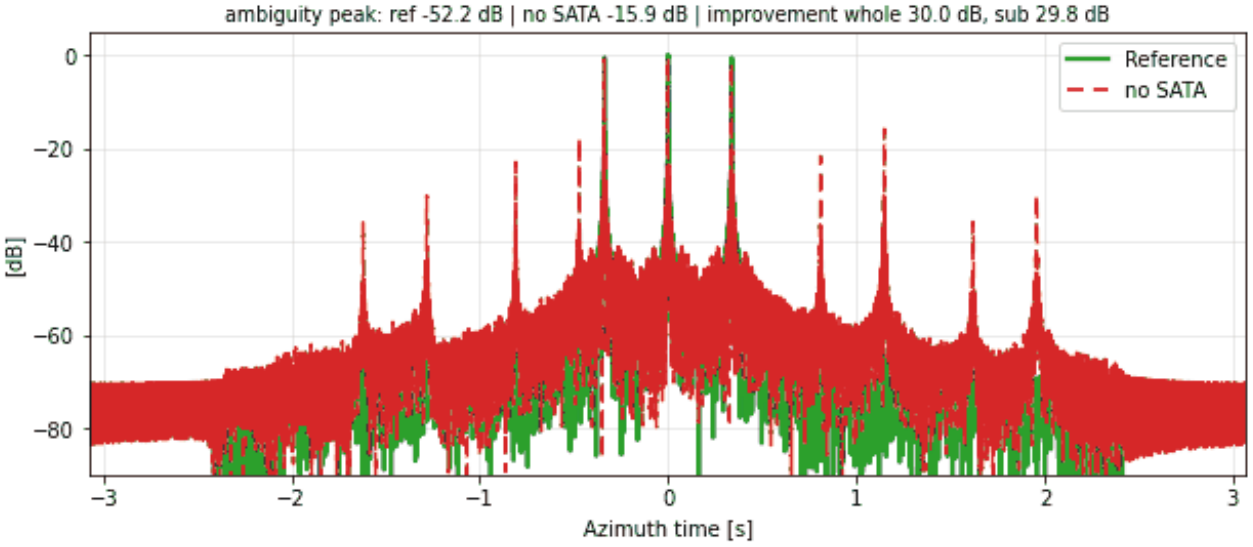



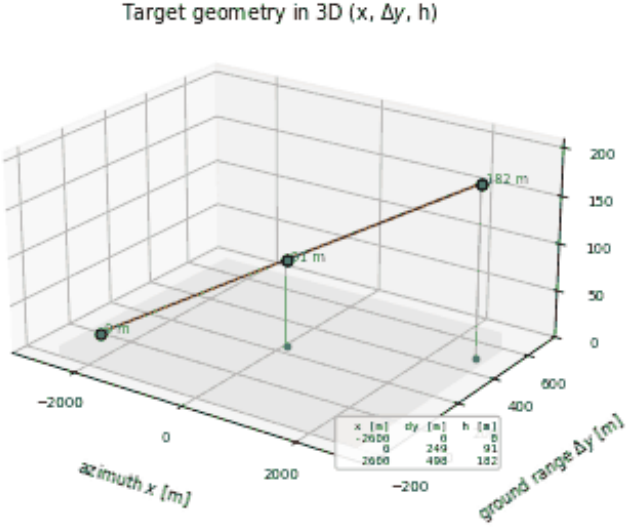
RA-NL-017 | SATA 1D | along-track ramp: N = 3, $\alpha = 2^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

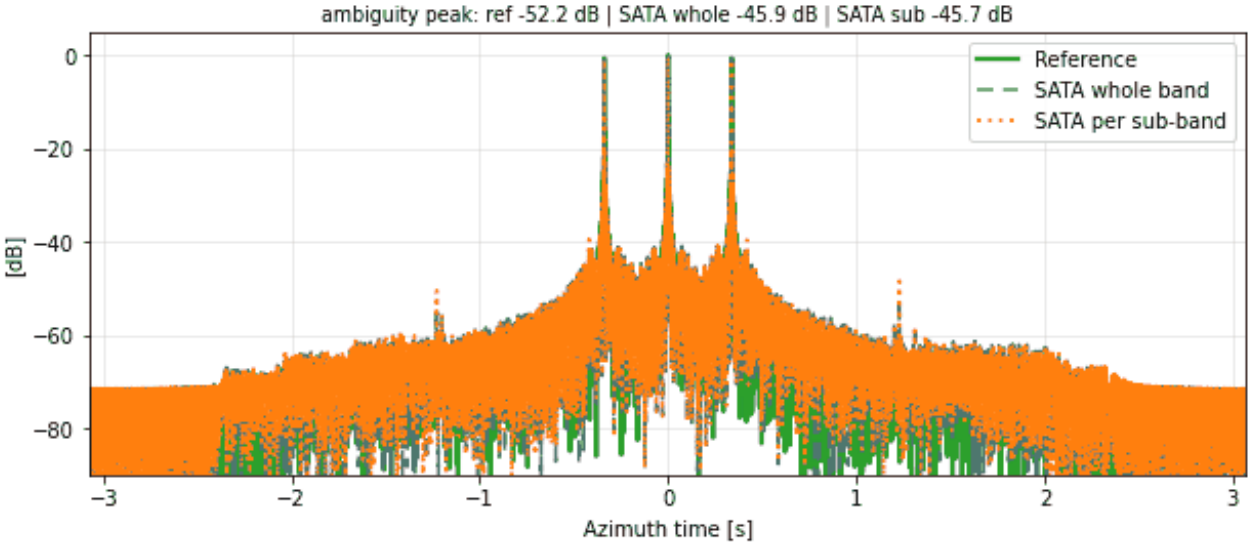





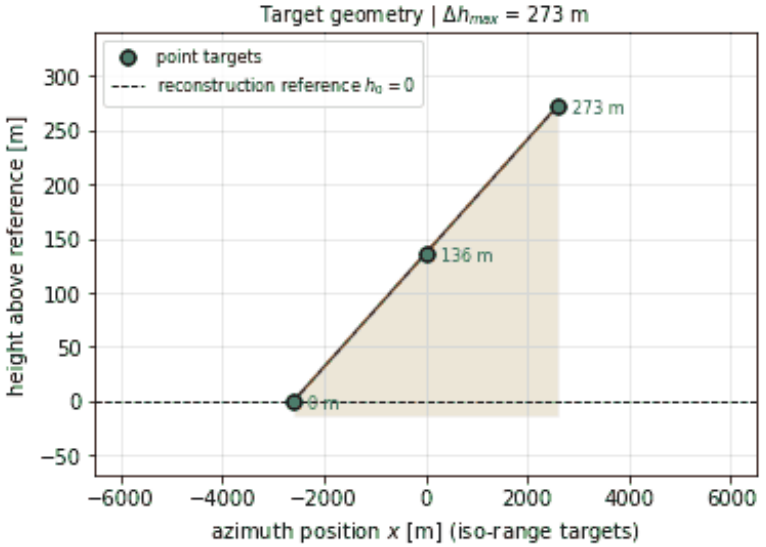



RA-NL-018 | SATA 1D | along-track ramp: N = 3, $\alpha = 3°$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights


$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



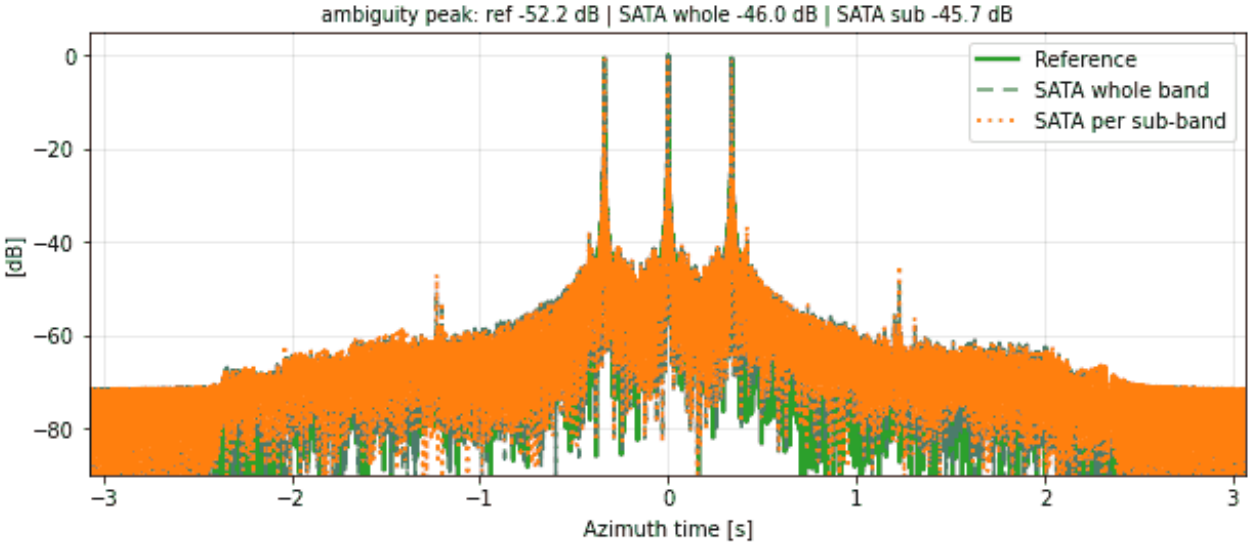





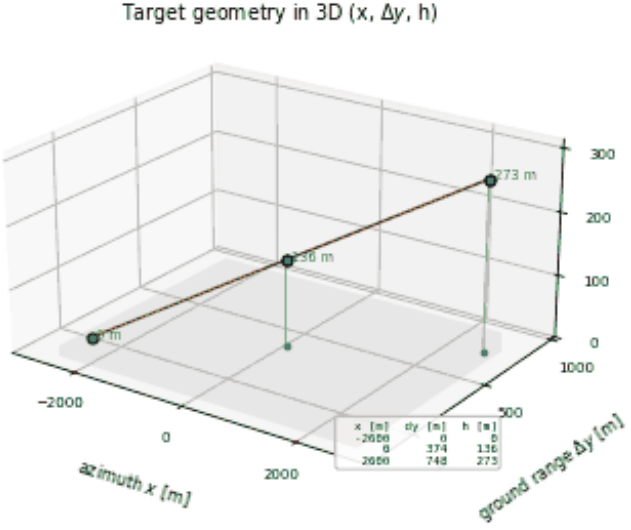



RA-NL-019 | SATA 1D | along-track ramp: N = 3, $\alpha = 4°$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

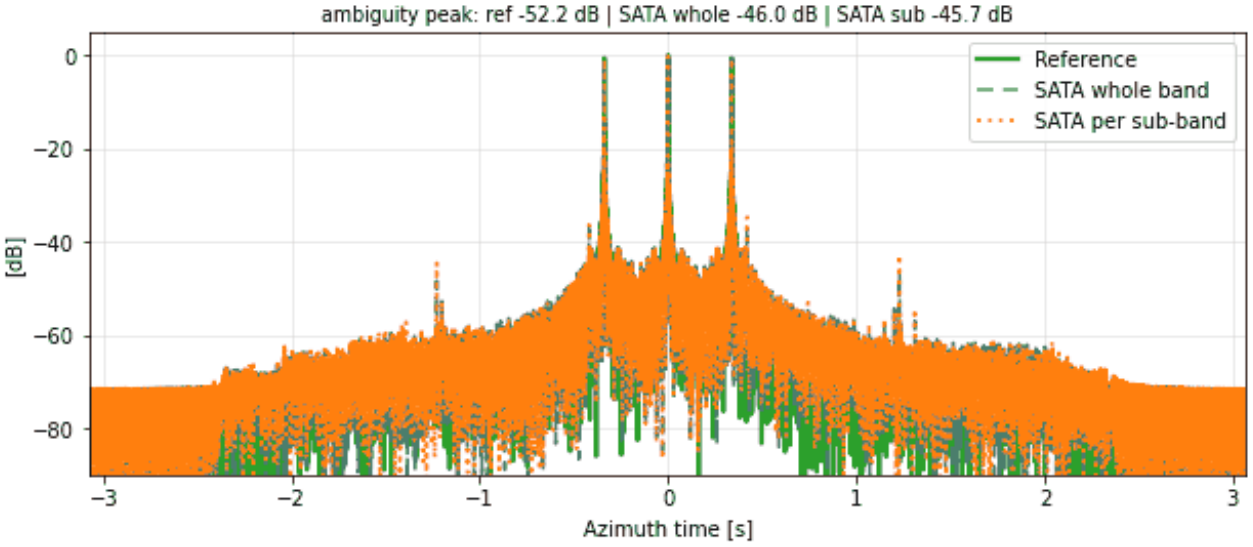

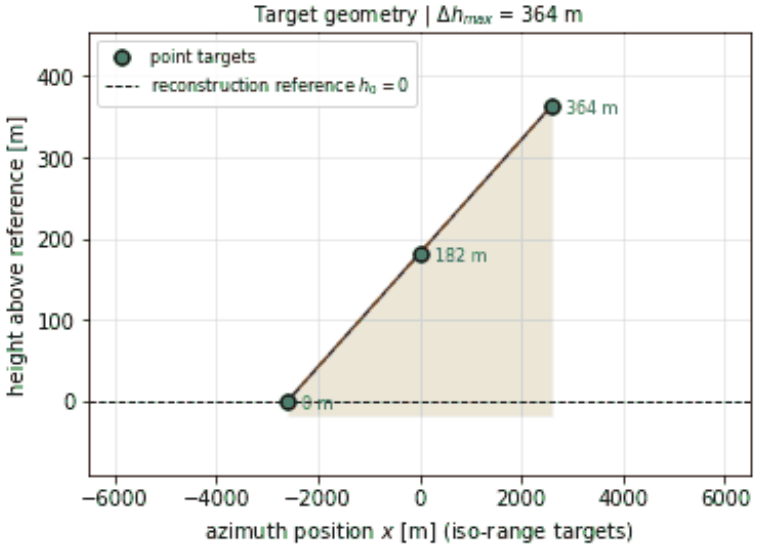


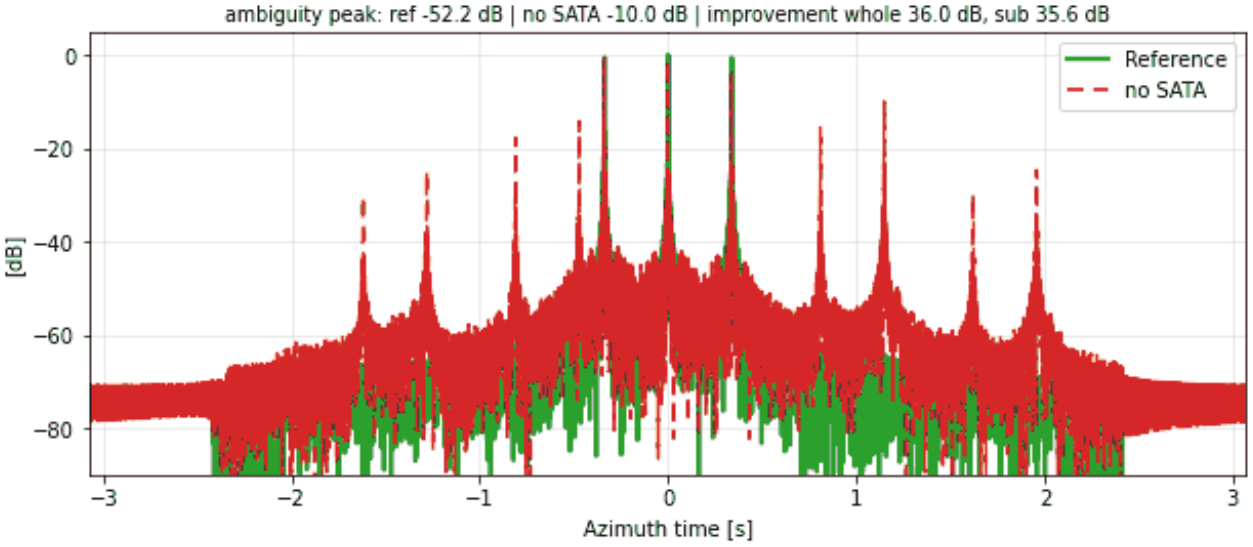
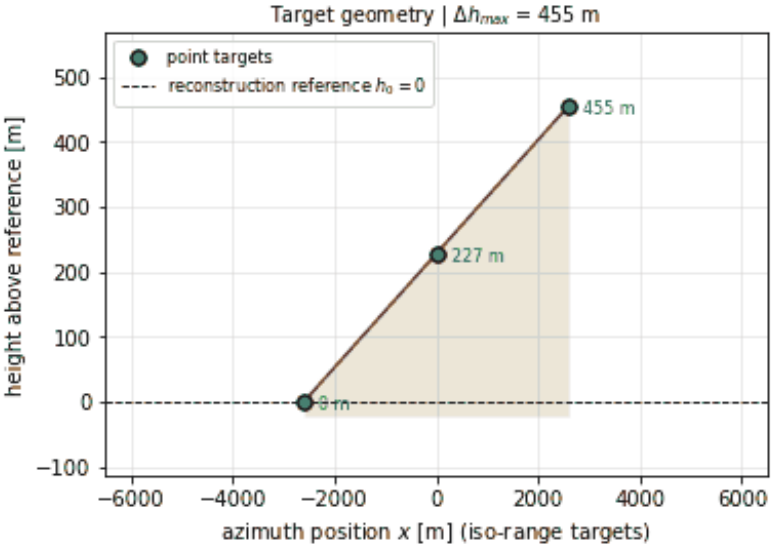


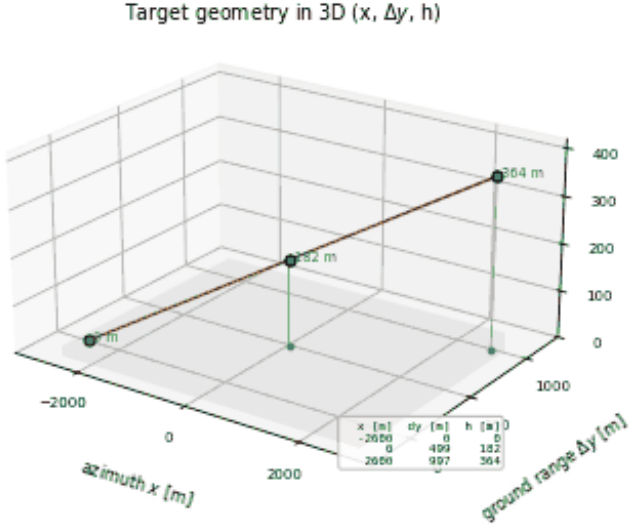
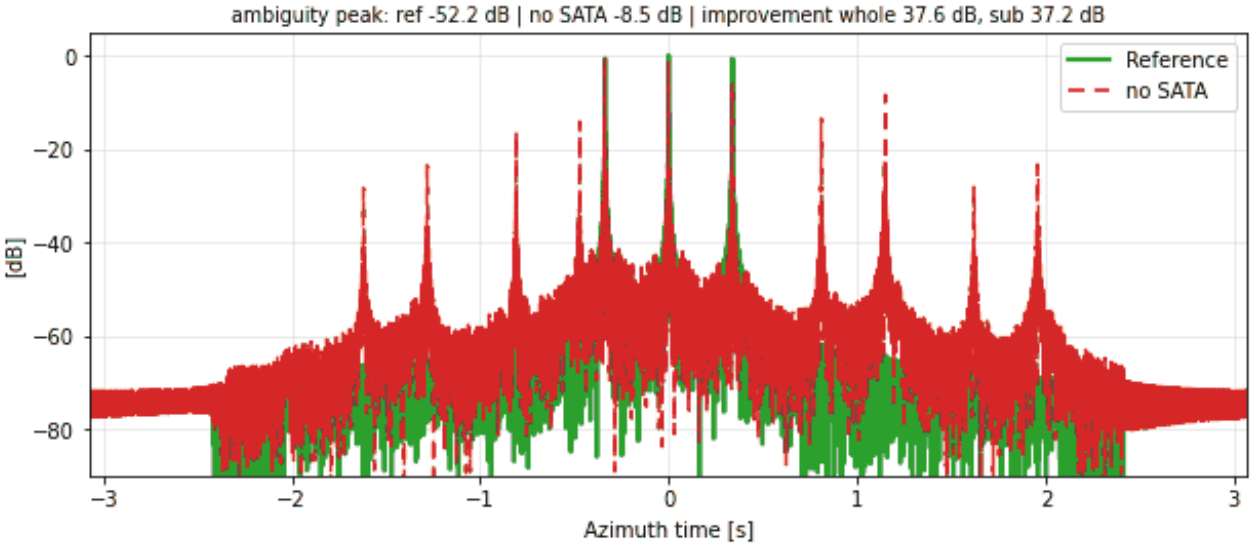

354


RA-NL-020 | SATA 1D | along-track ramp: N = 3, $\alpha = 5^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

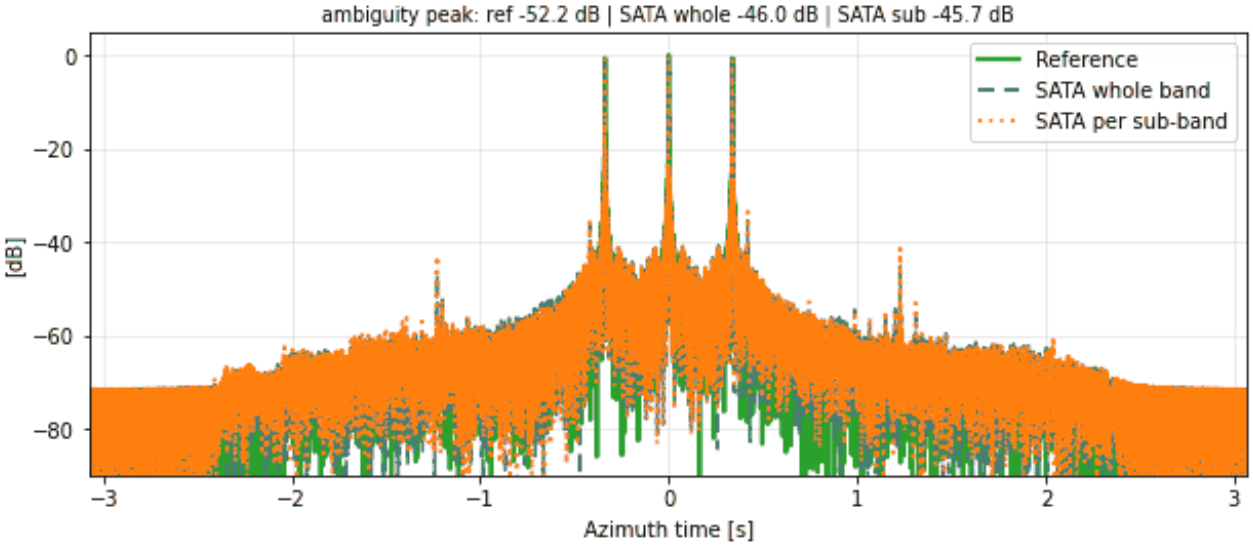






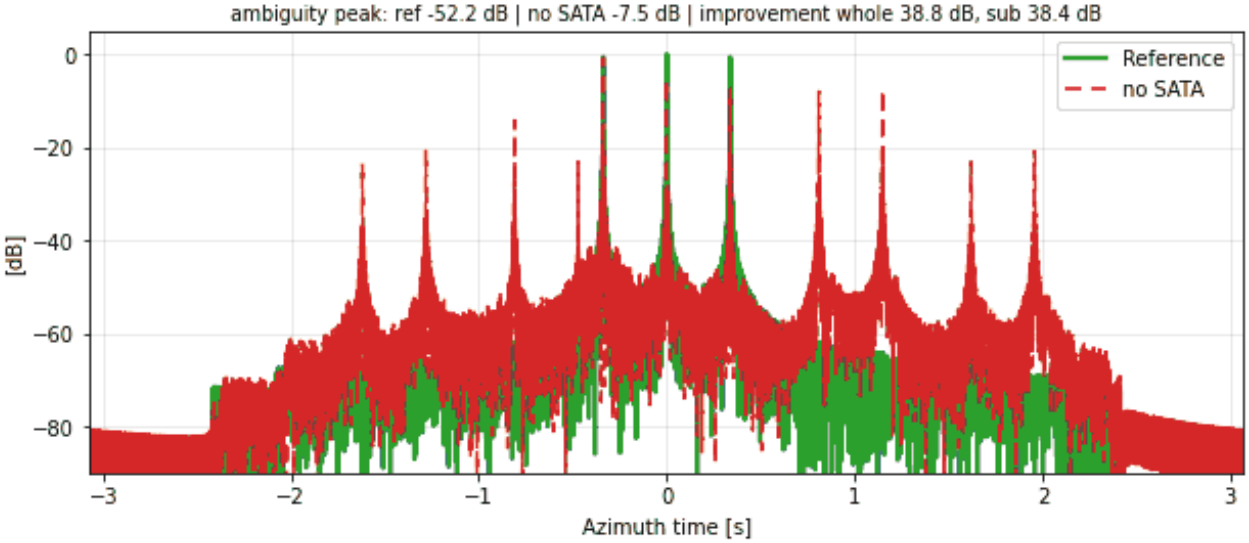


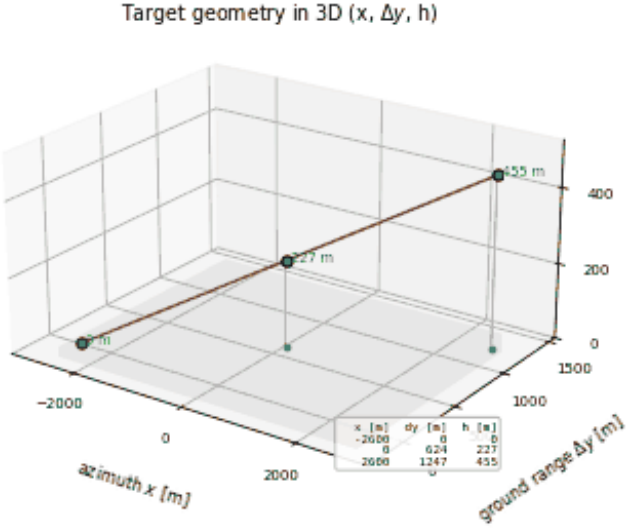
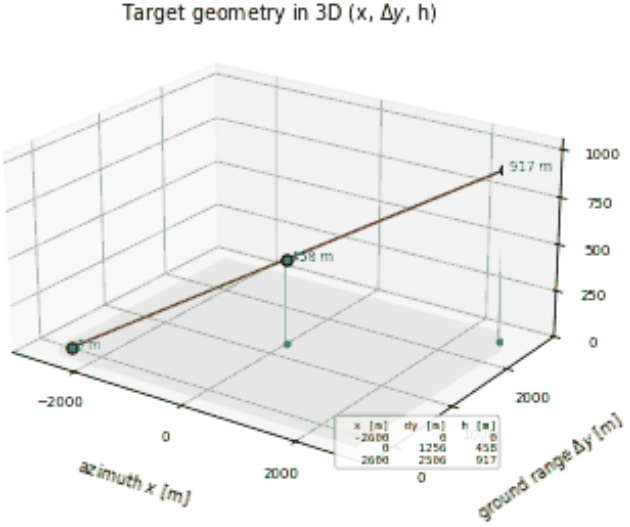



RA-NL-021 | SATA 1D | along-track ramp: N = 3, $\alpha = 10^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

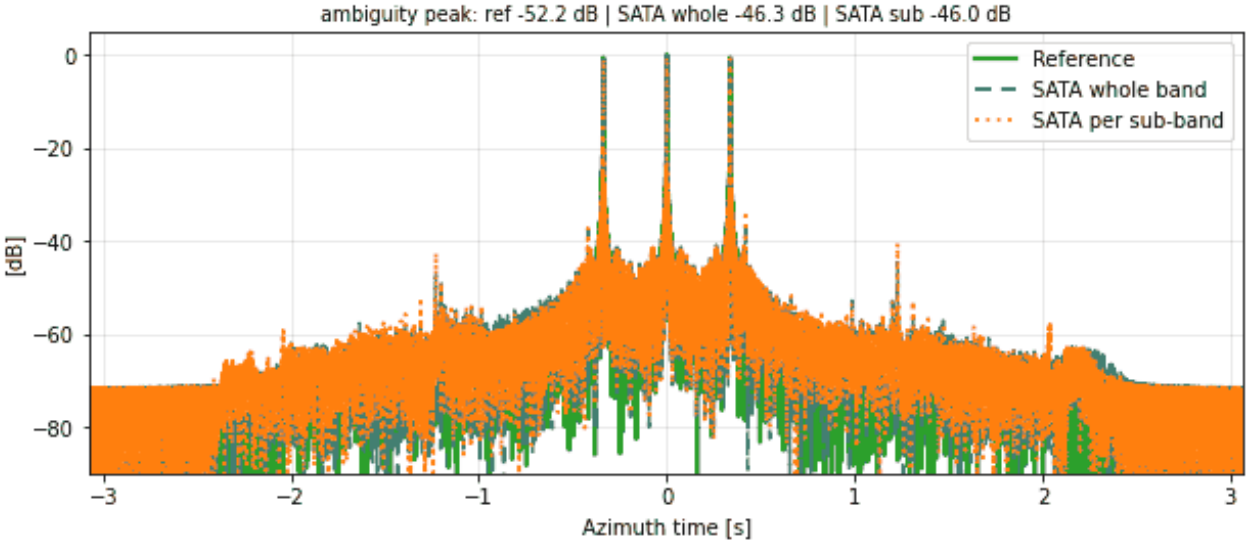

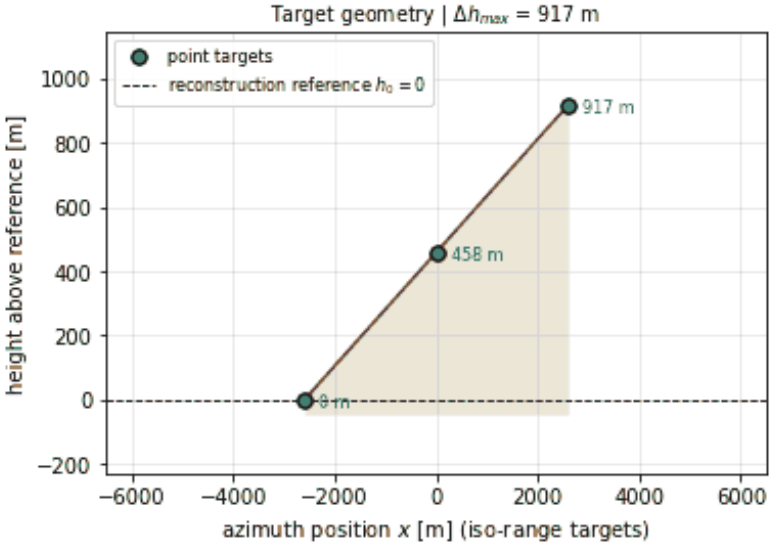



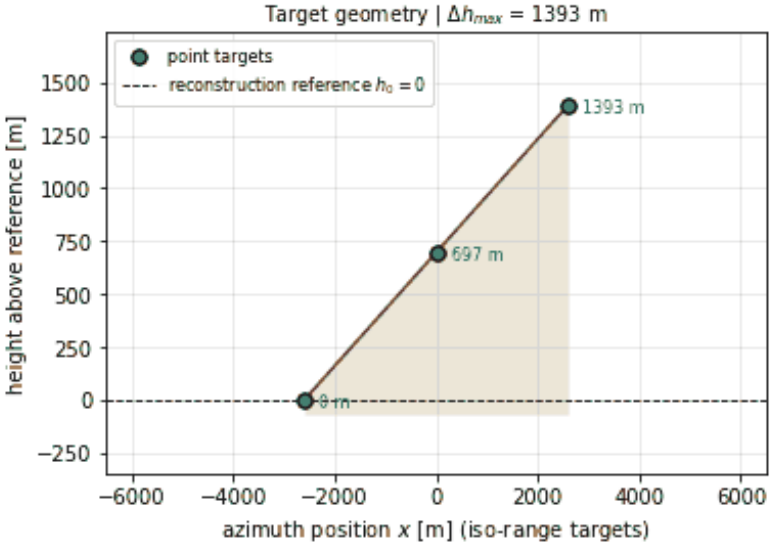



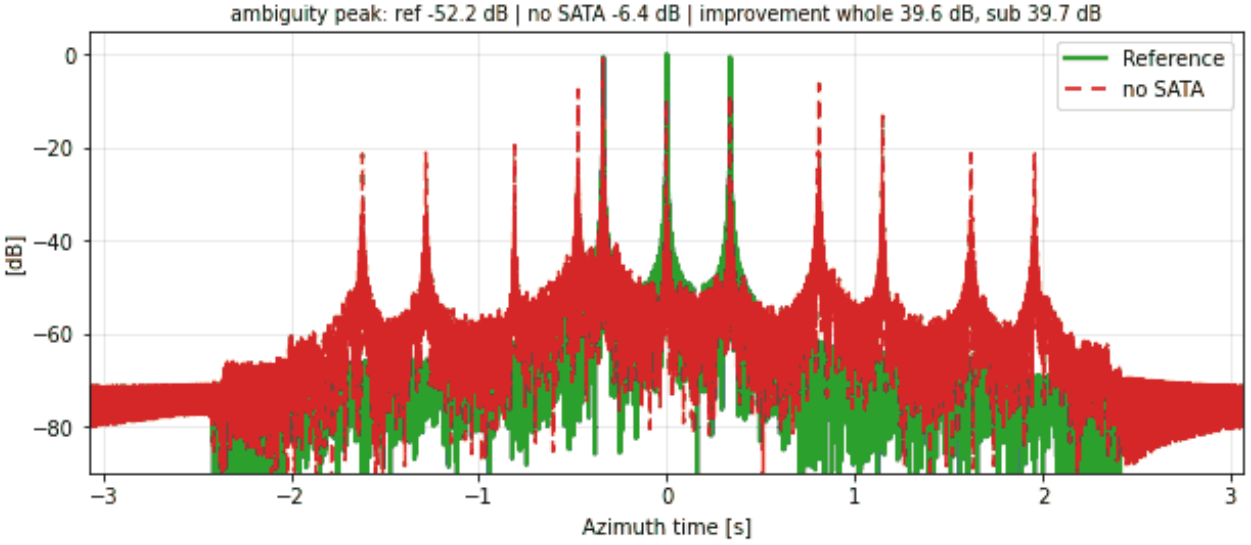



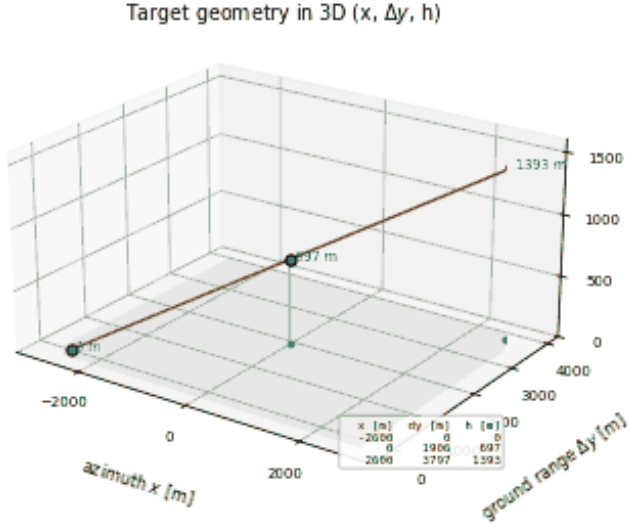
RA-NL-022 | SATA 1D | along-track ramp: N = 3, $\alpha = 15^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

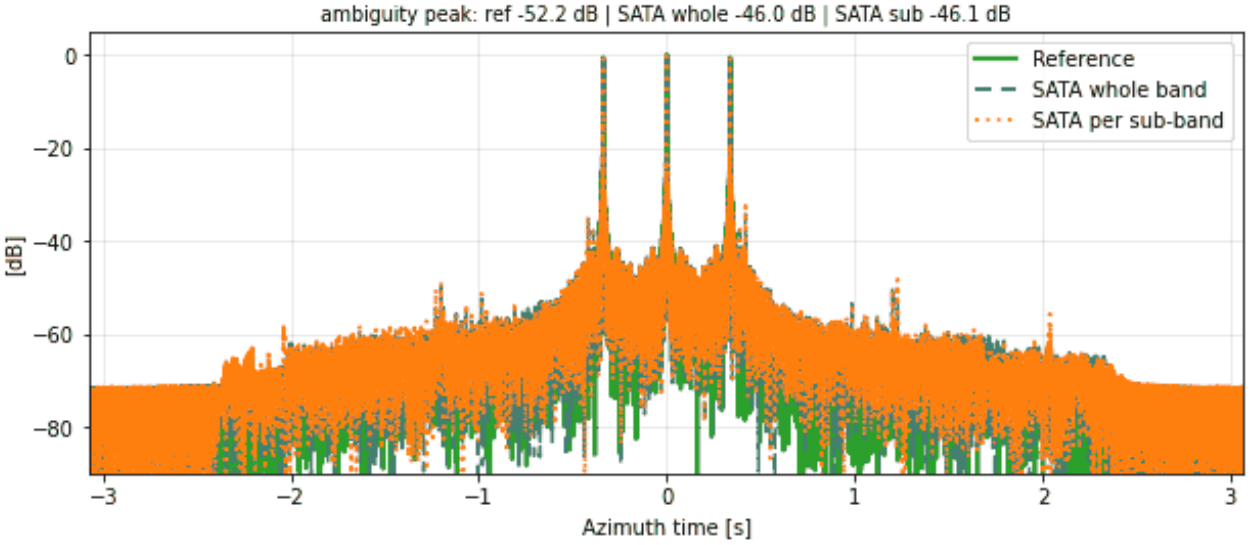






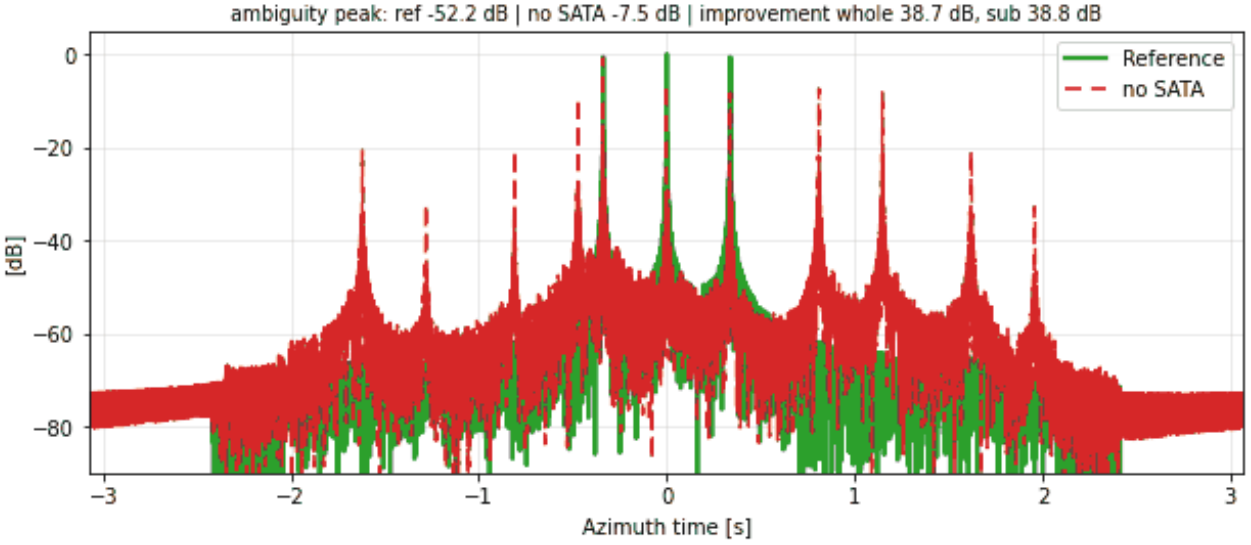



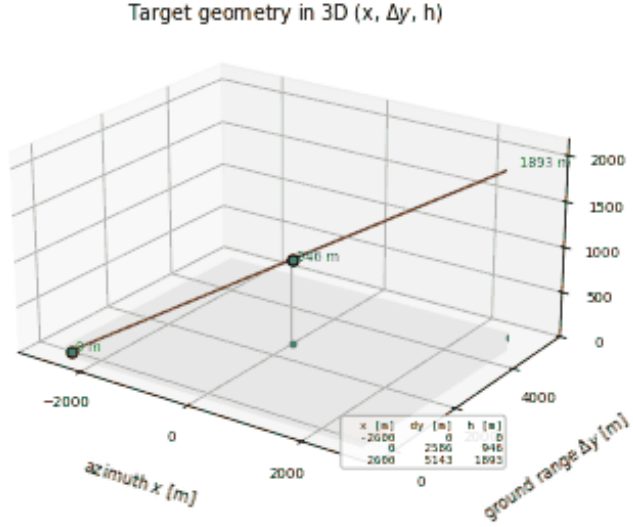



RA-NL-023 | SATA 1D | along-track ramp: N = 3, $\alpha = 20°$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

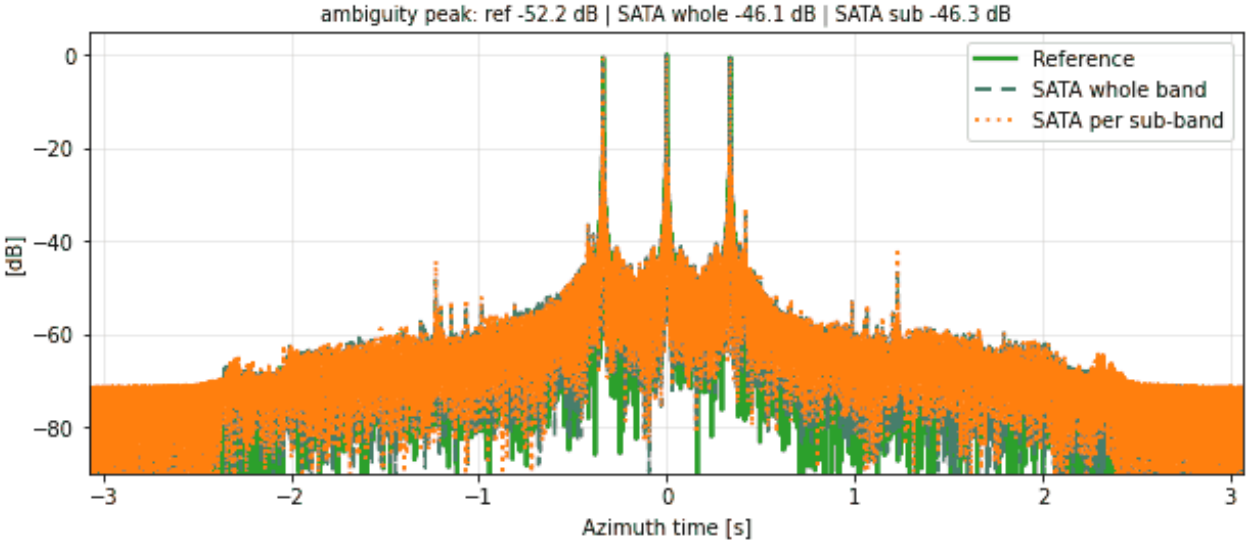

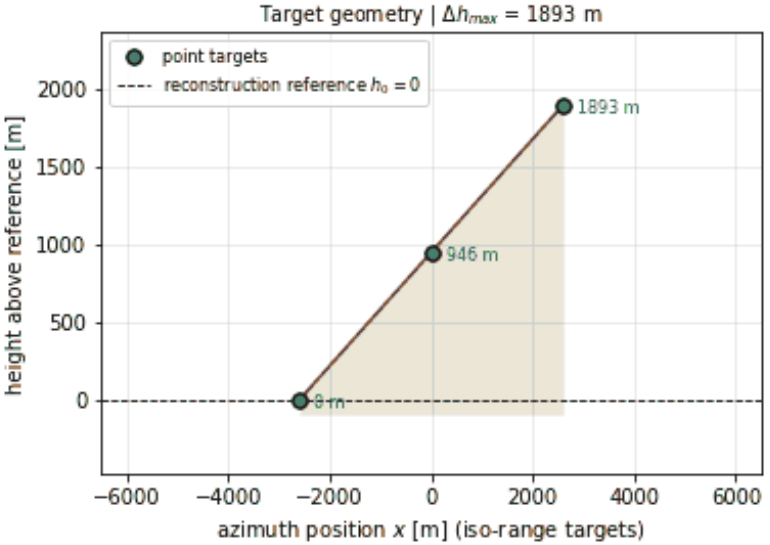



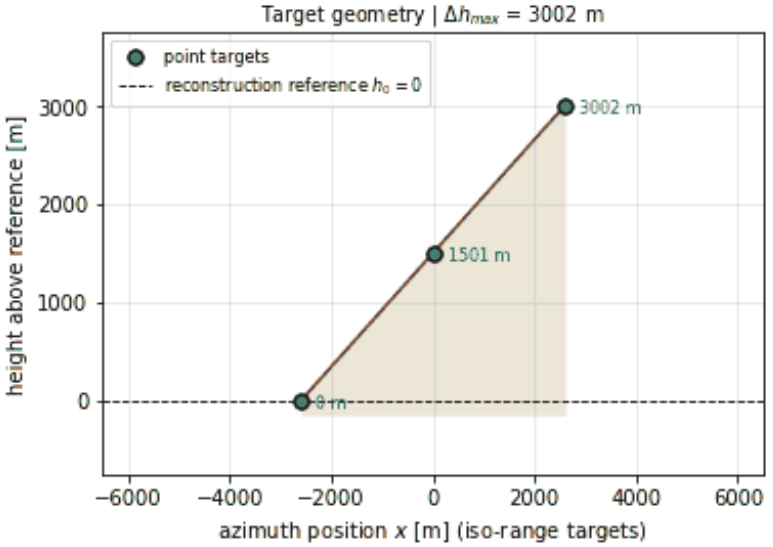



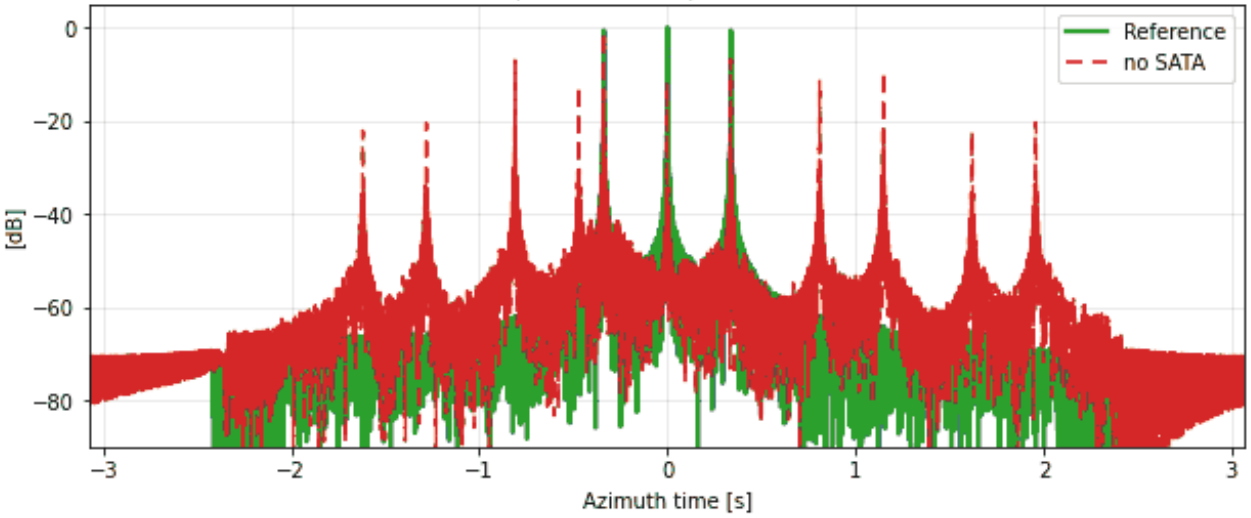



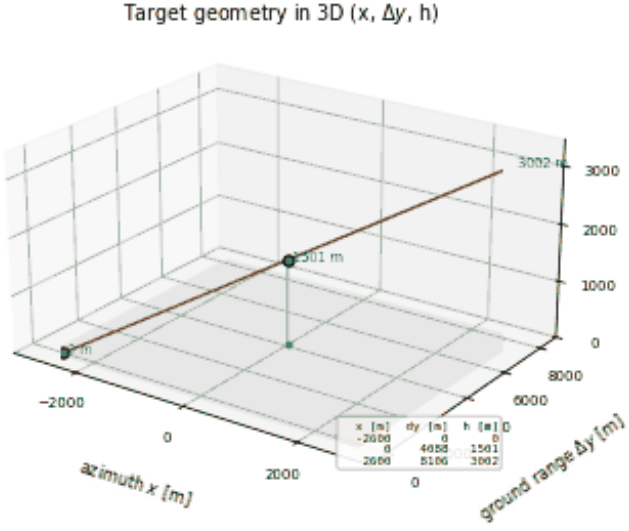
RA-NL-024 | SATA 1D | along-track ramp: N = 3, $\alpha = 30^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

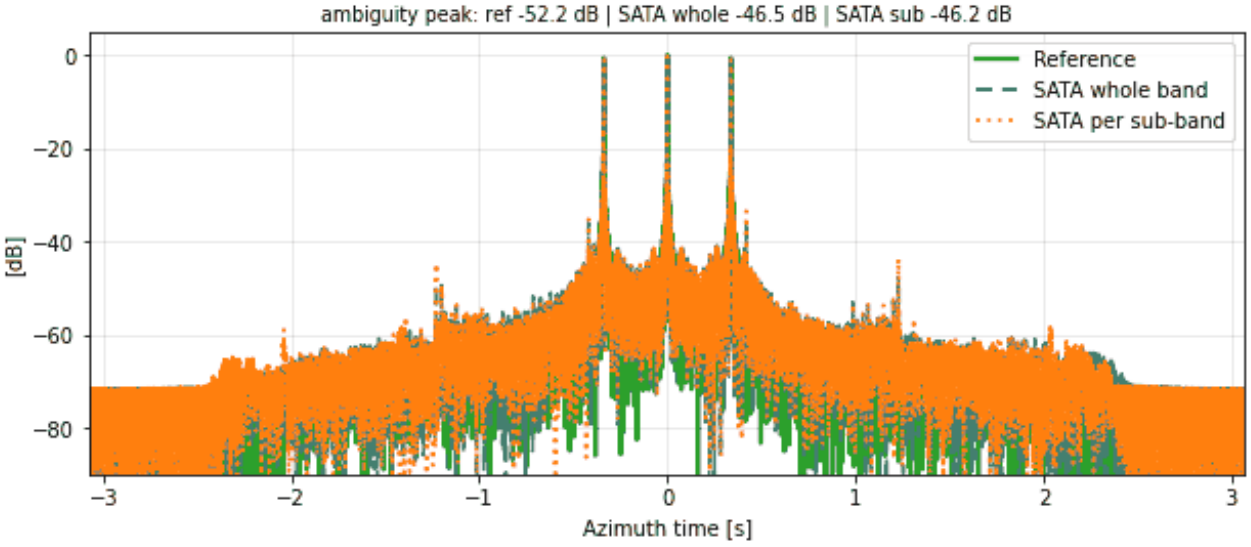





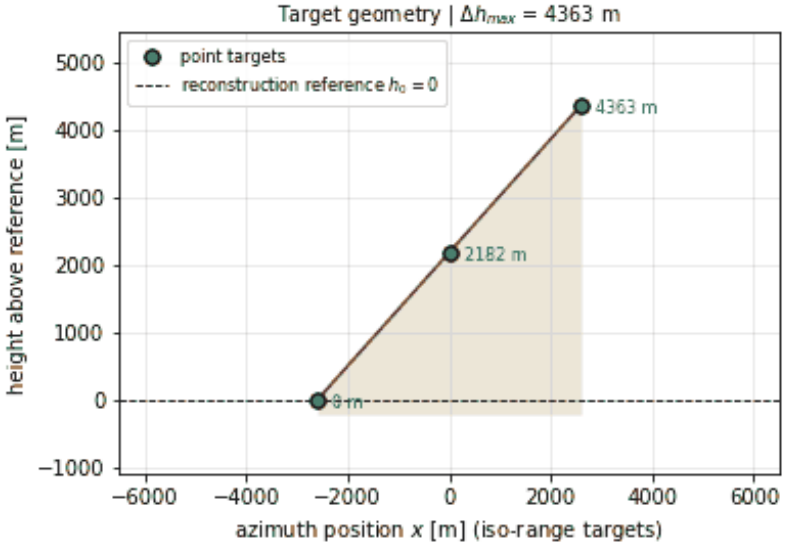



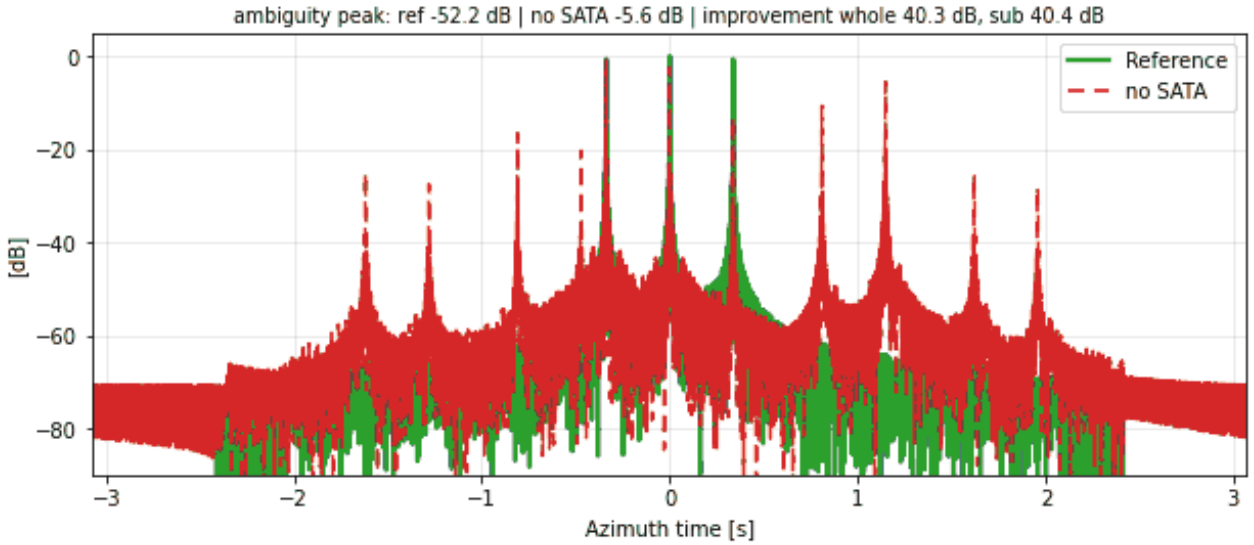



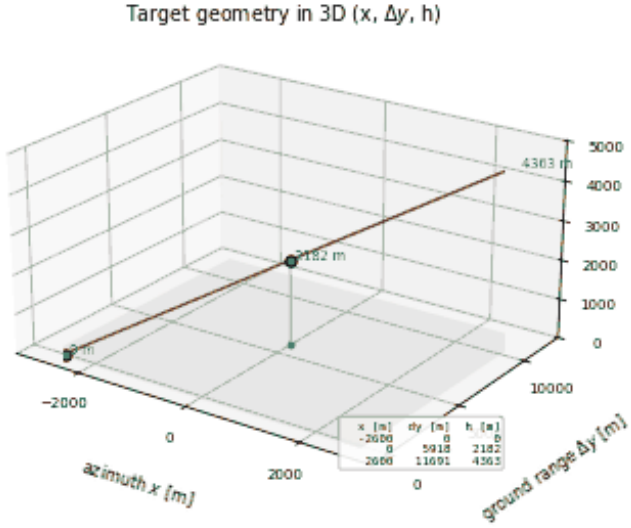

359

RA-NL-025 | SATA 1D | along-track ramp: N = 3, $\alpha = 40°$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

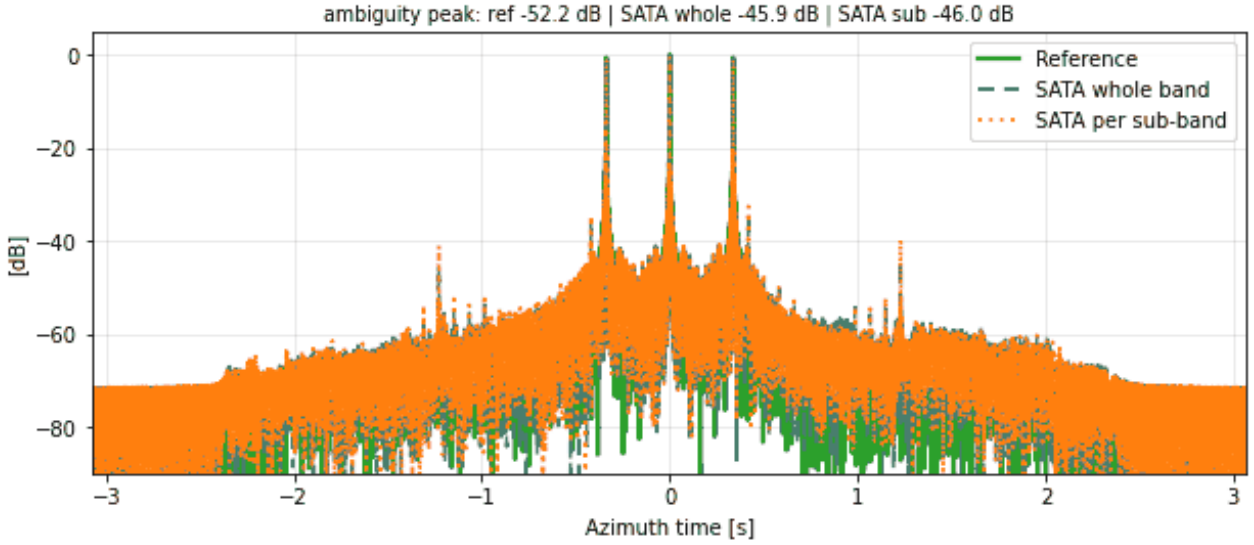






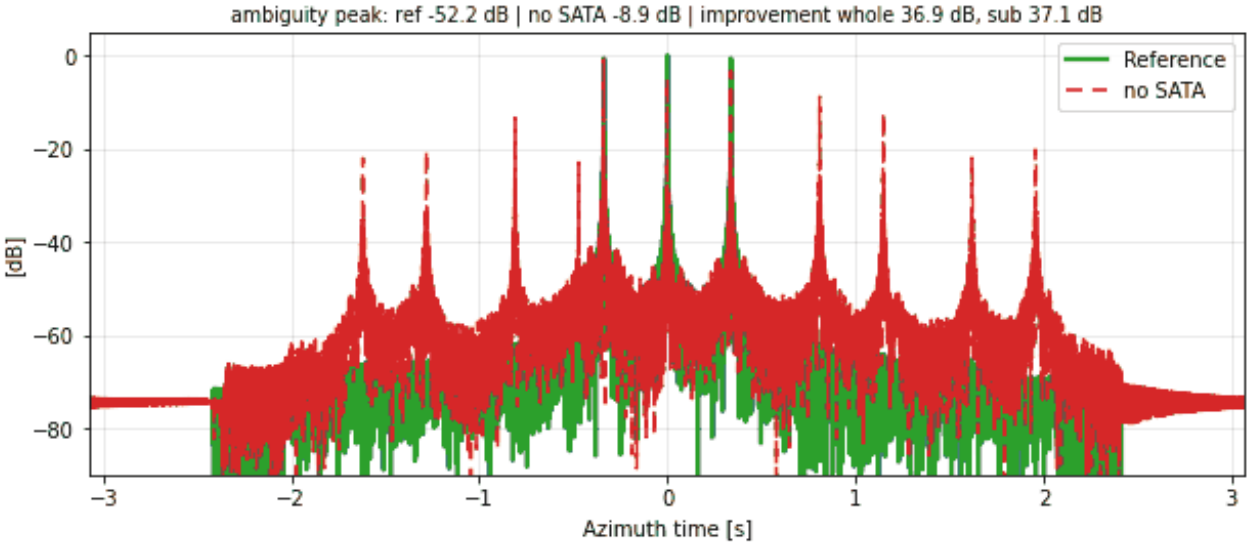



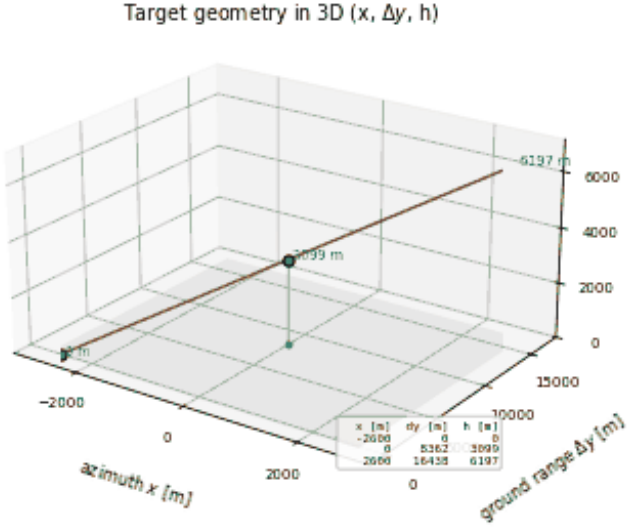



RA-NL-026 | SATA 1D | along-track ramp: N = 3, $\alpha = 50^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

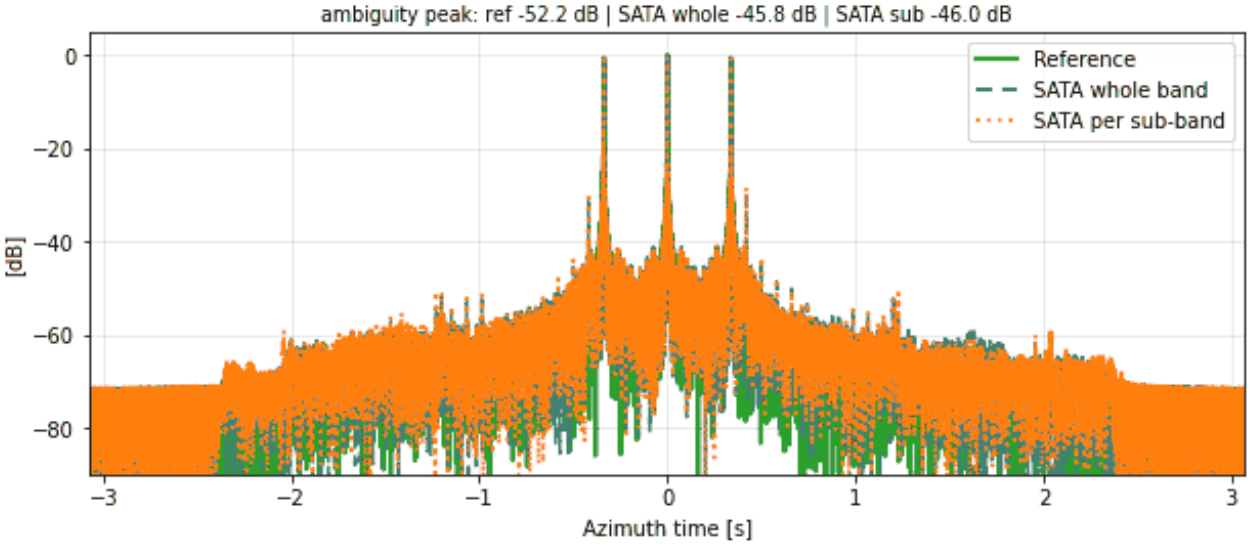


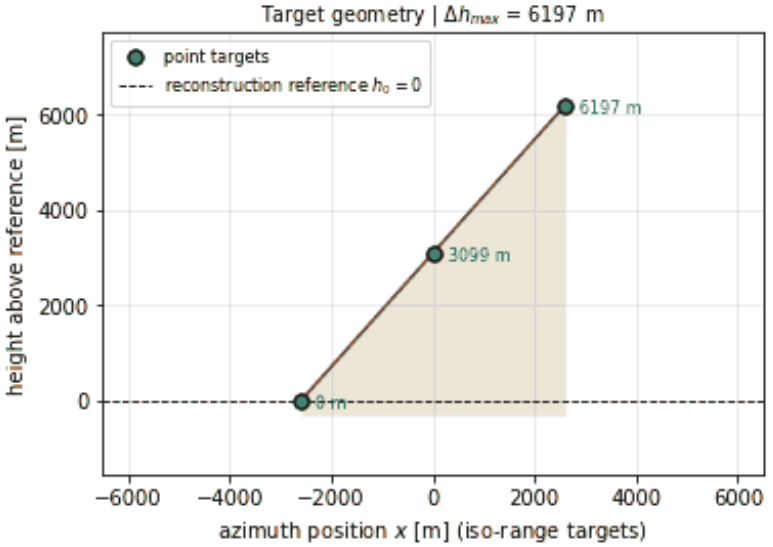



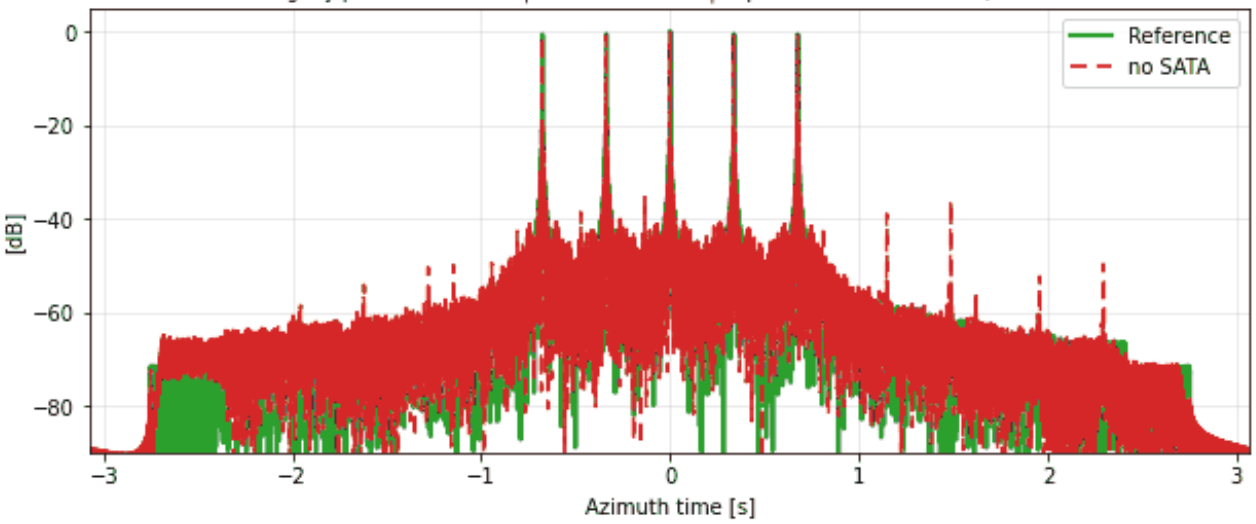



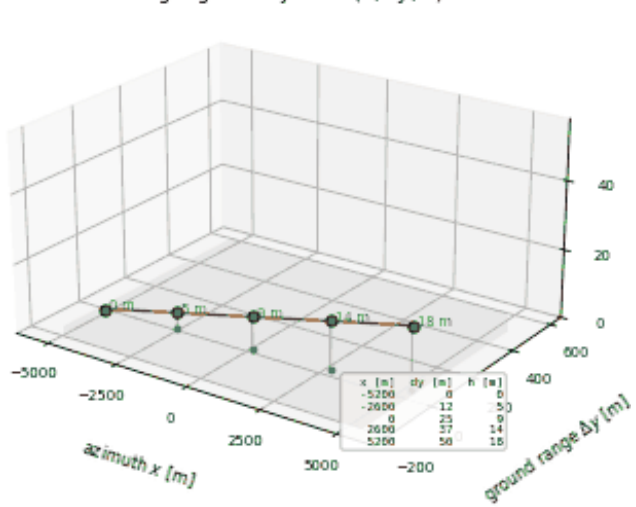



RA-NL-027 | SATA 1D | along-track ramp: N = 5, $\alpha = 0.1^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

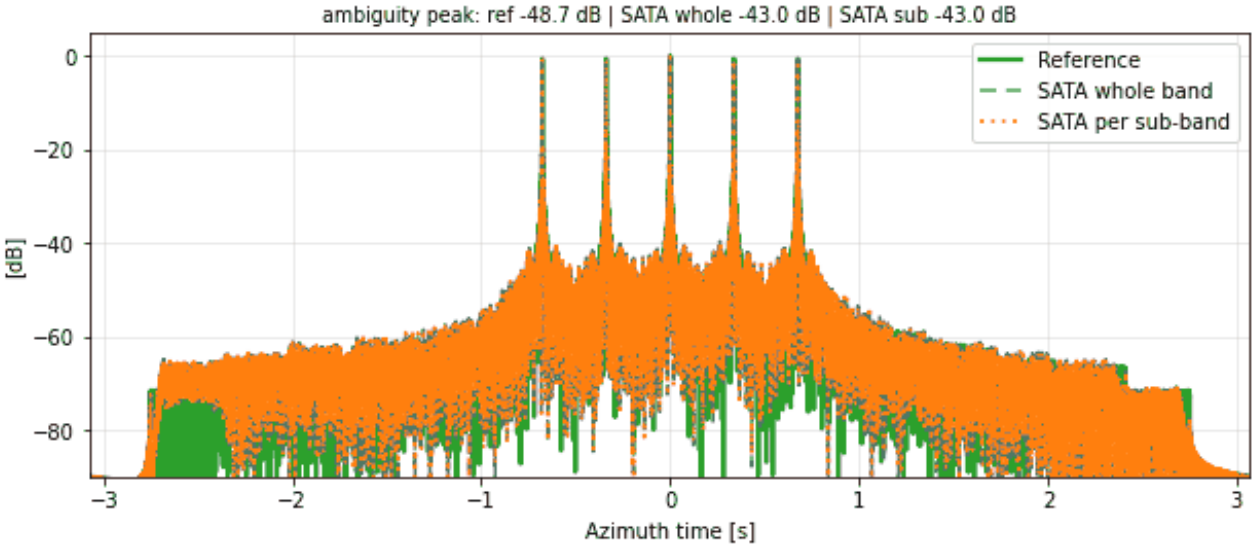

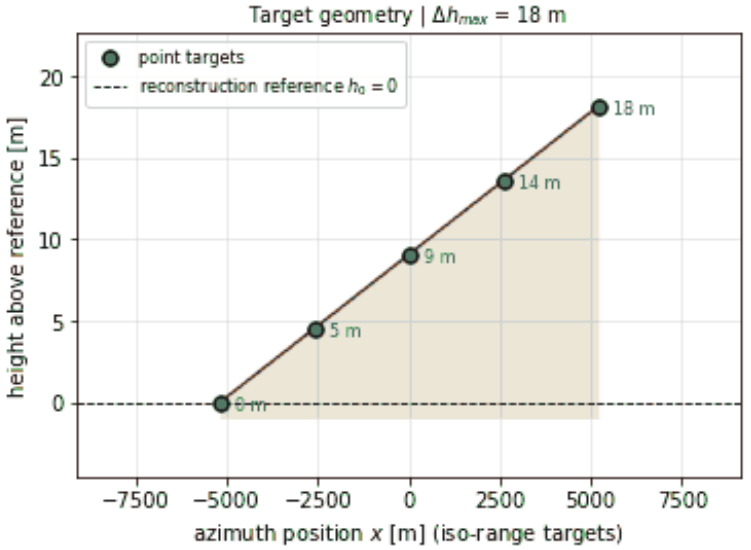



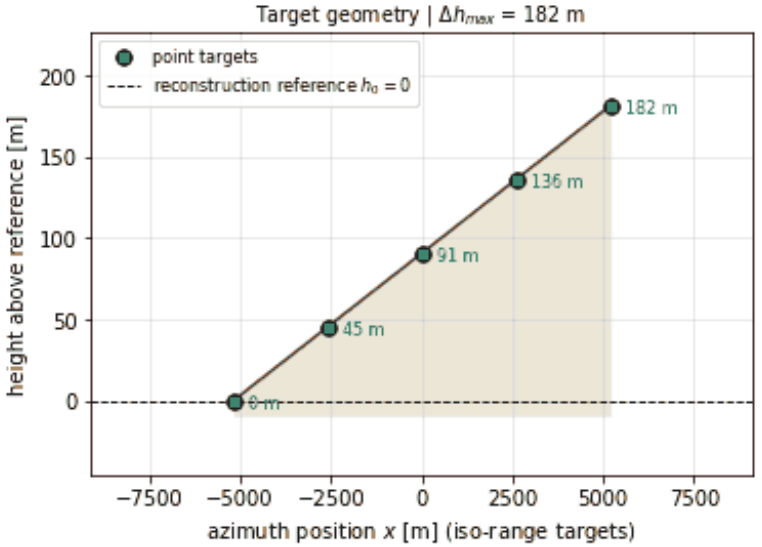



RA-NL-028 | SATA 1D | along-track ramp: N = 5, $\alpha = 1^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights


$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



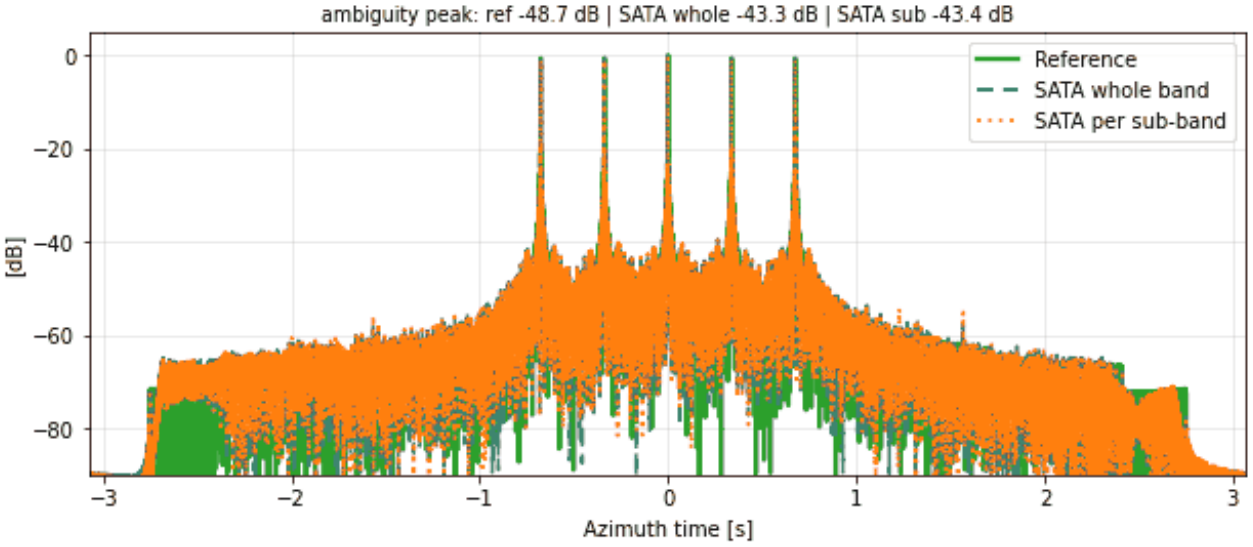



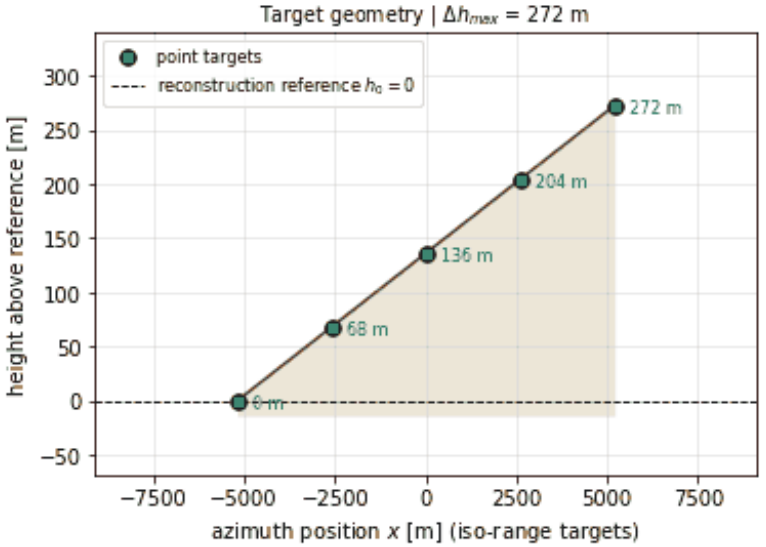





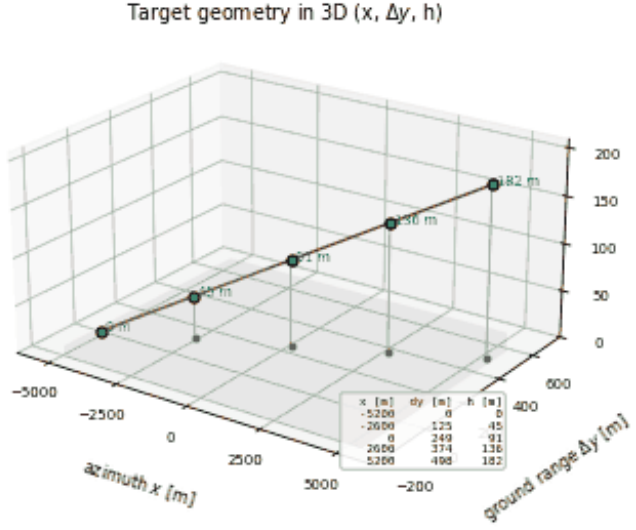


RA-NL-029 | SATA 1D | along-track ramp: N = 5, $\alpha = 1.5^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

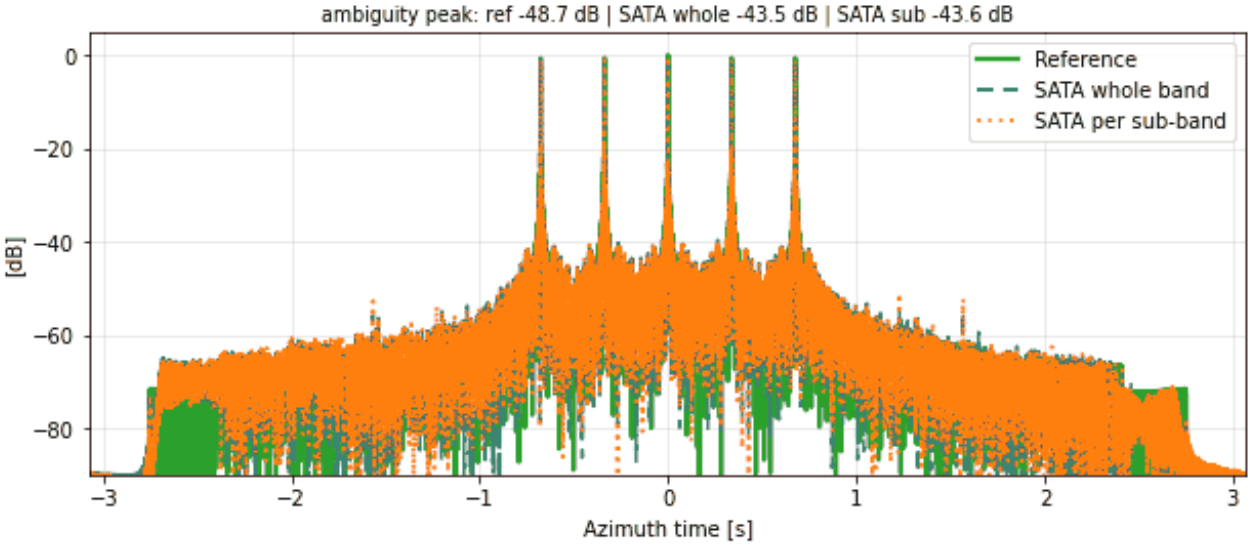

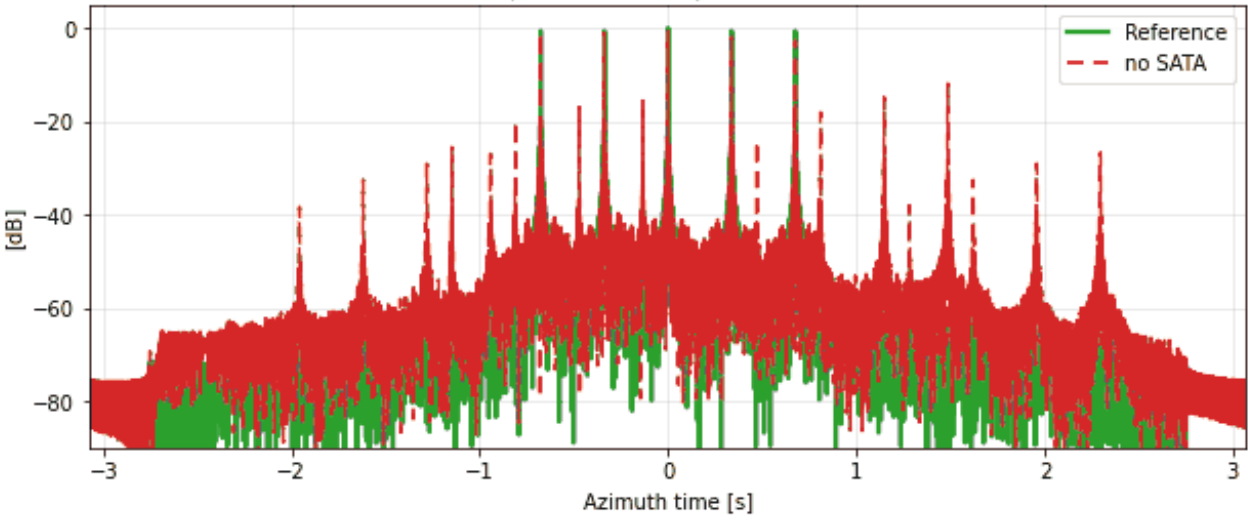



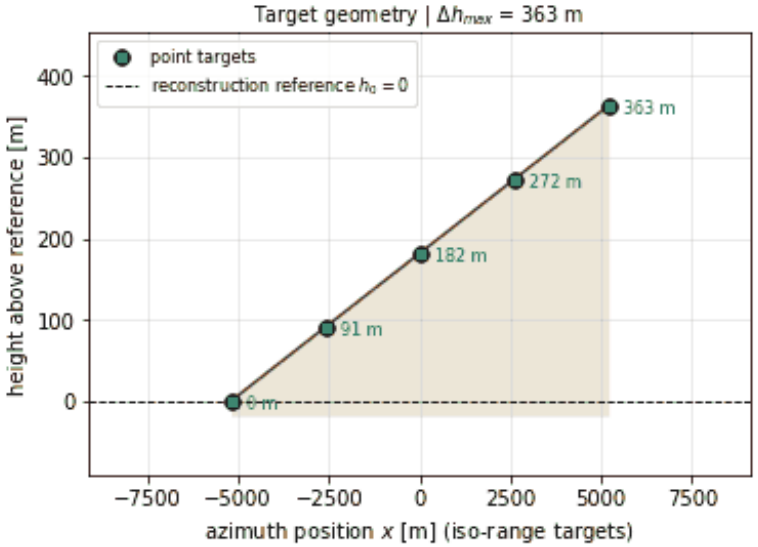


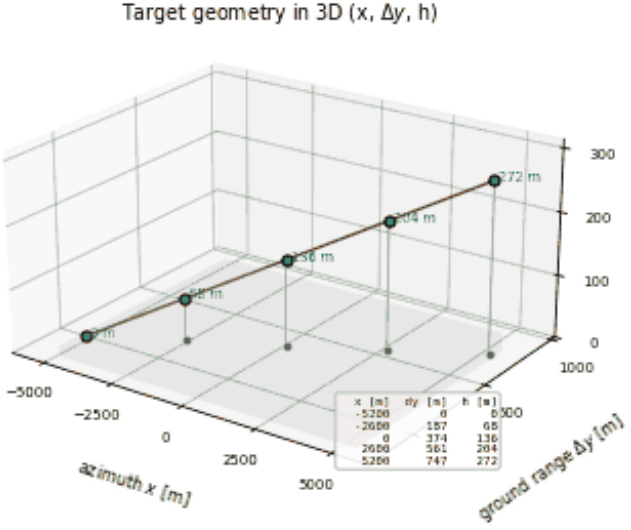
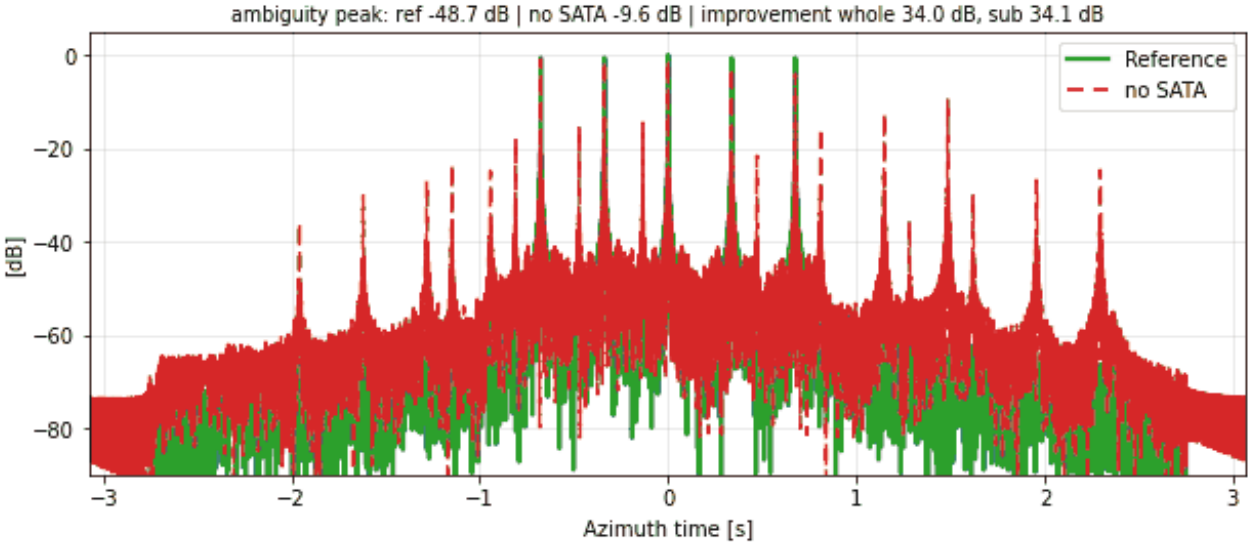

364


RA-NL-030 | SATA 1D | along-track ramp: N = 5, $\alpha = 2^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

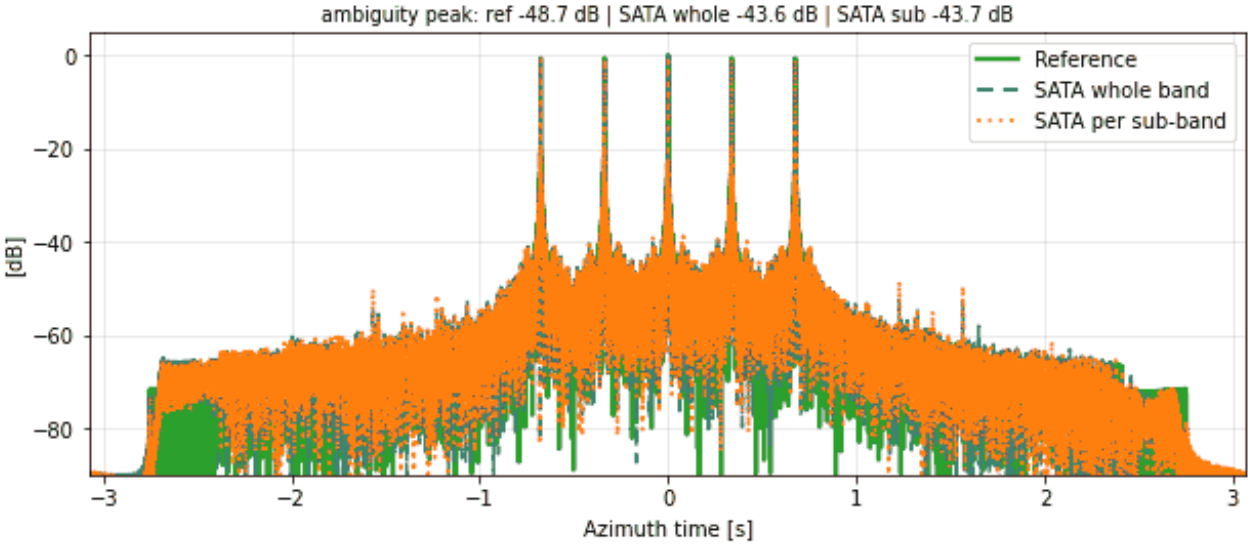





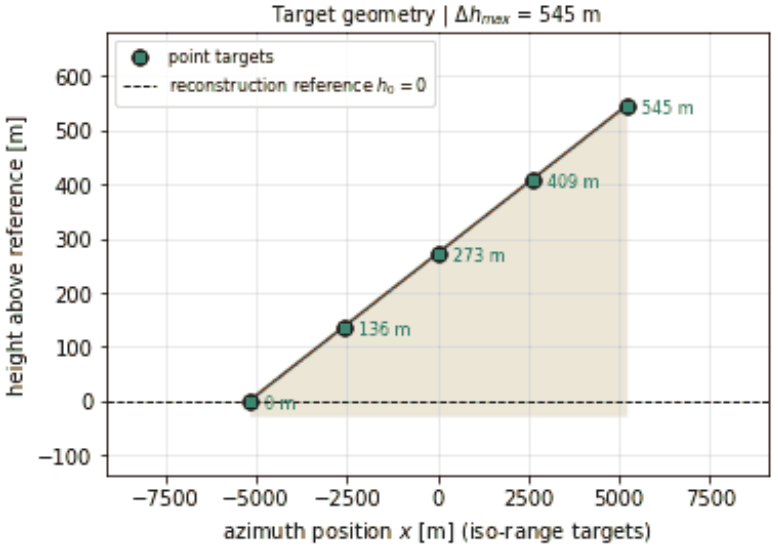


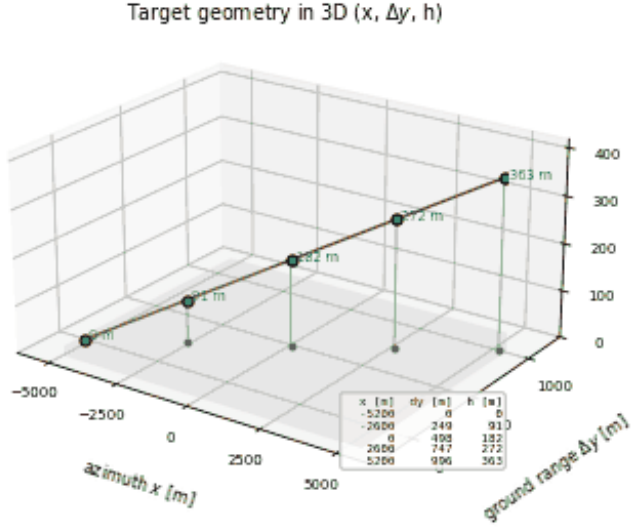
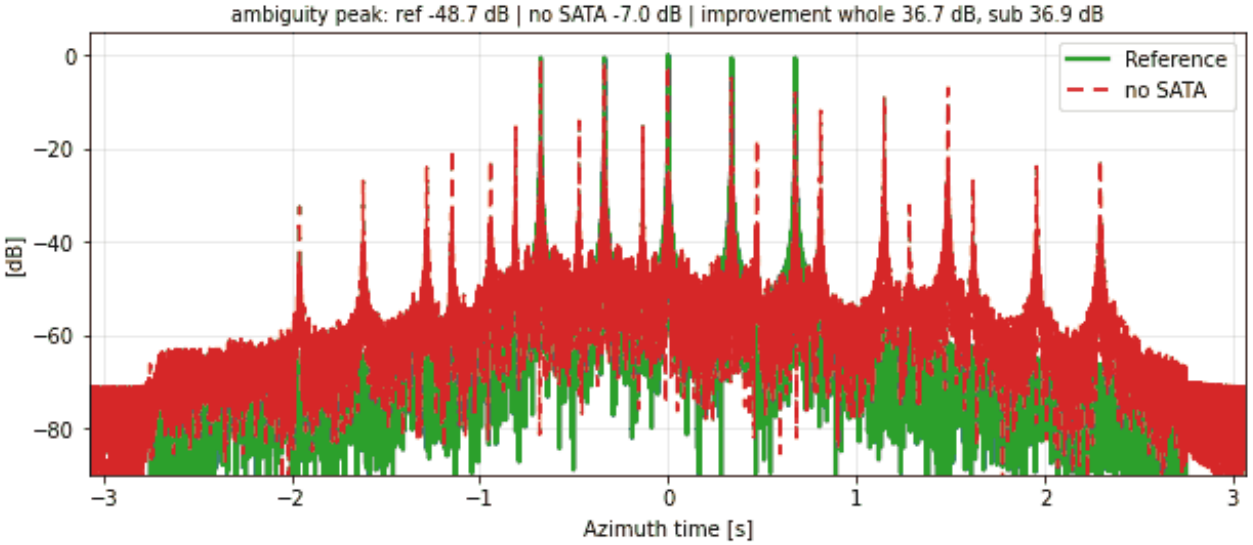

365


RA-NL-031 | SATA 1D | along-track ramp: N = 5, $\alpha = 3^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

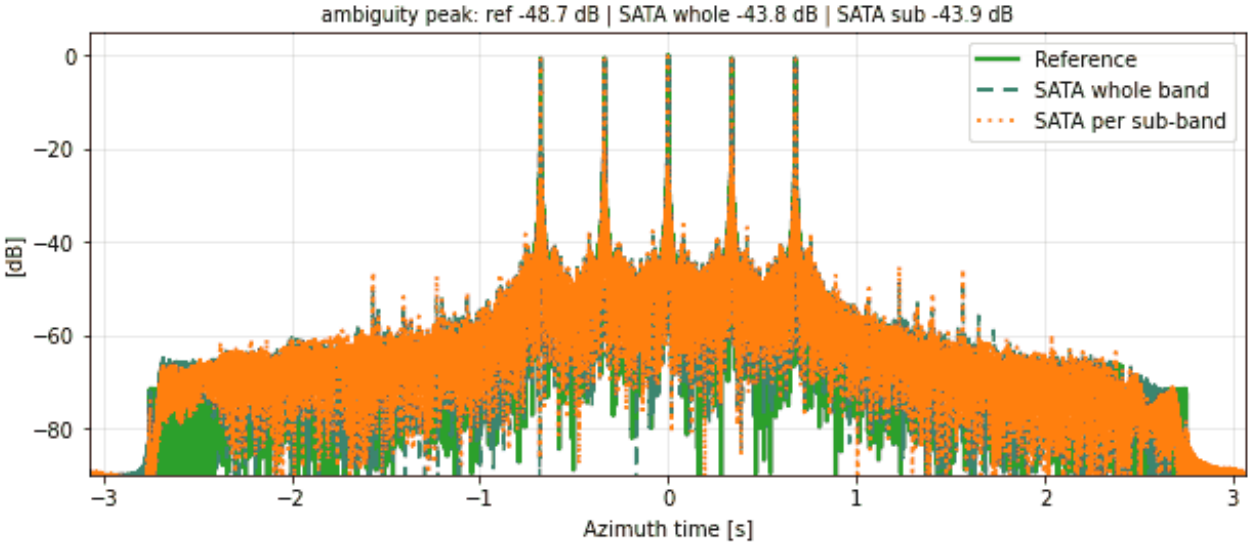





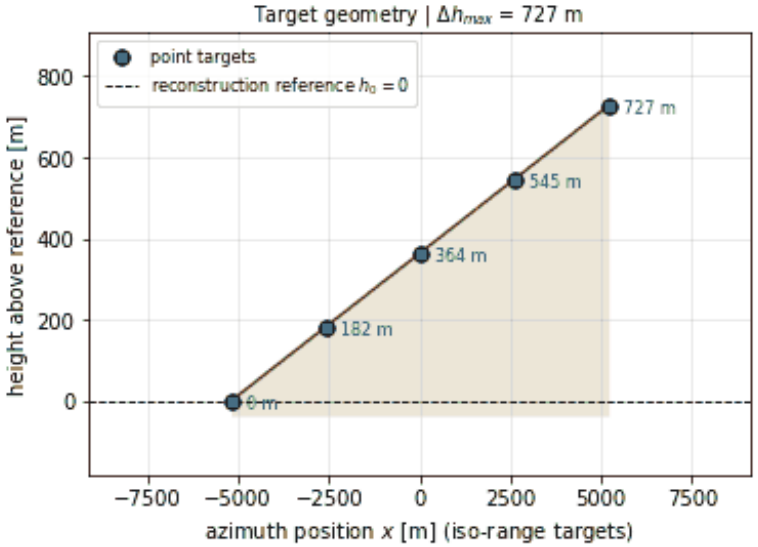


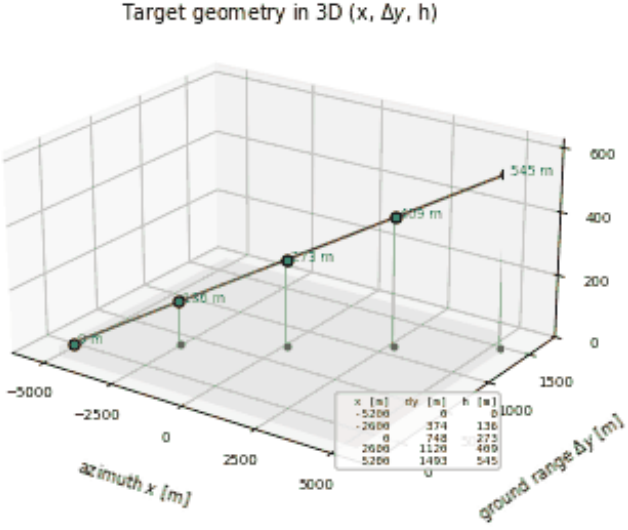
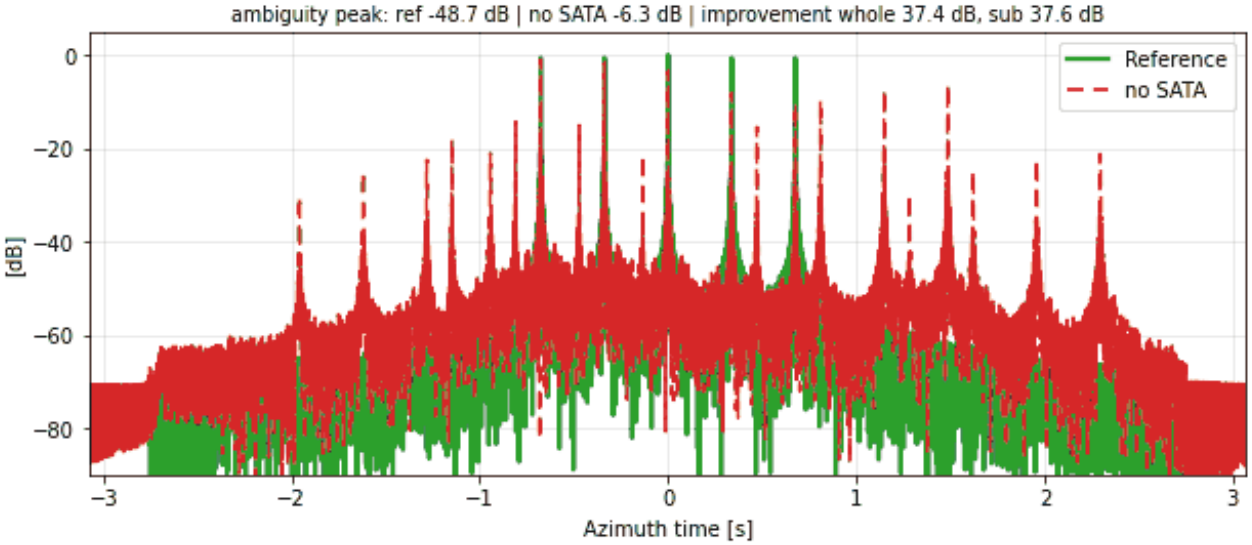



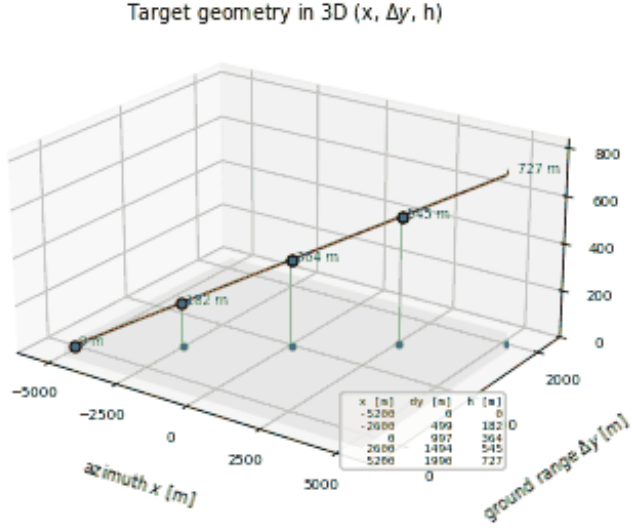
RA-NL-032 | SATA 1D | along-track ramp: N = 5, $\alpha = 4°$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

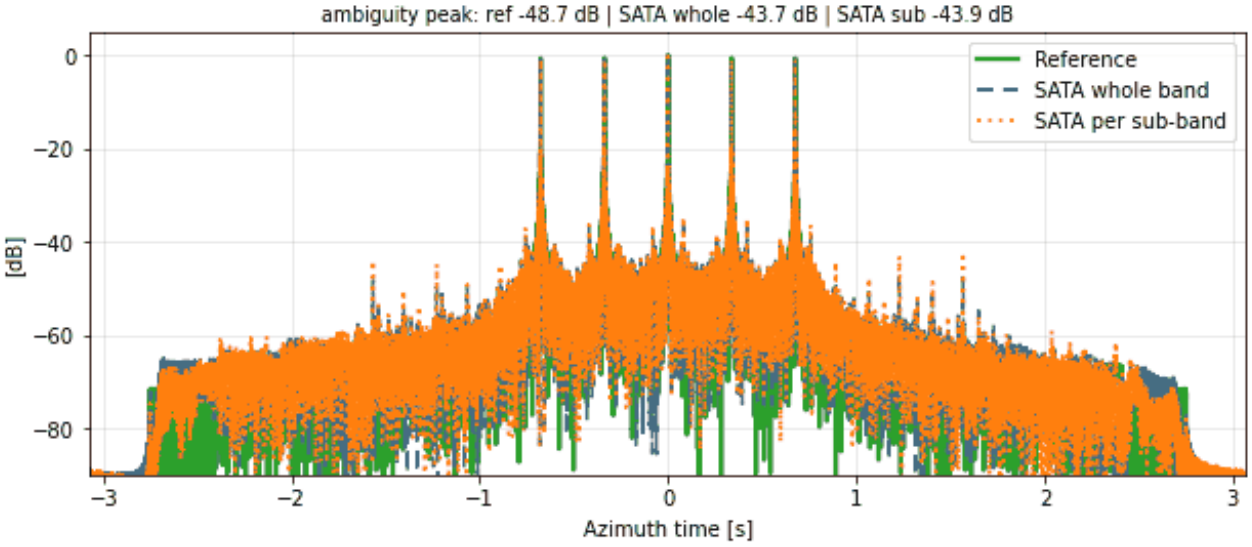






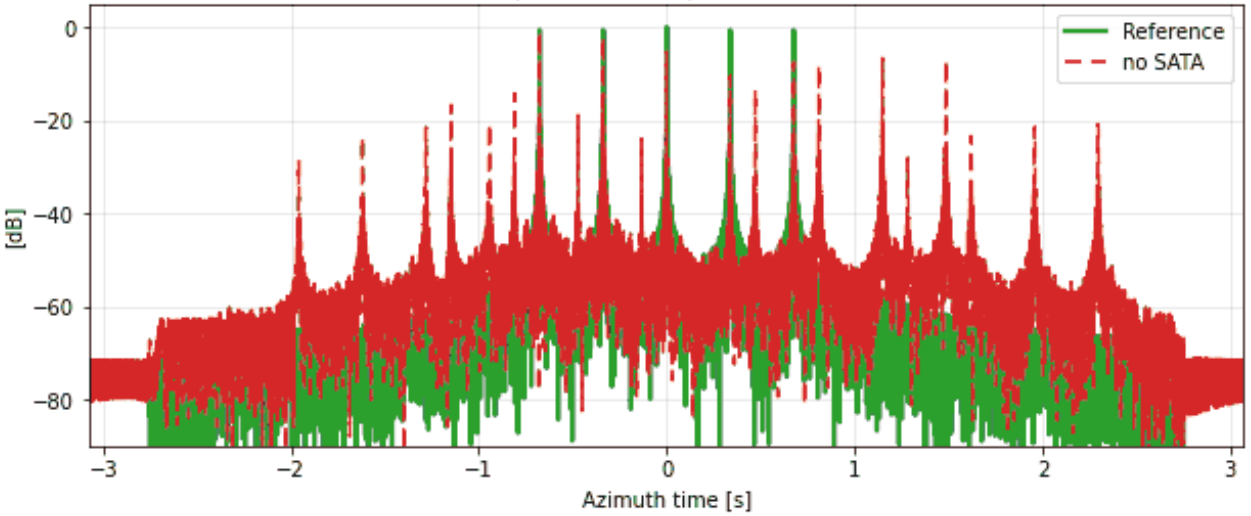



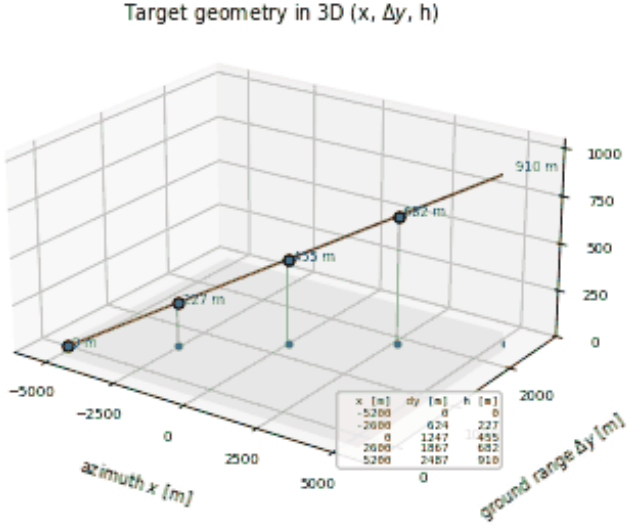



RA-NL-033 | SATA 1D | along-track ramp: N = 5, $\alpha = 5^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

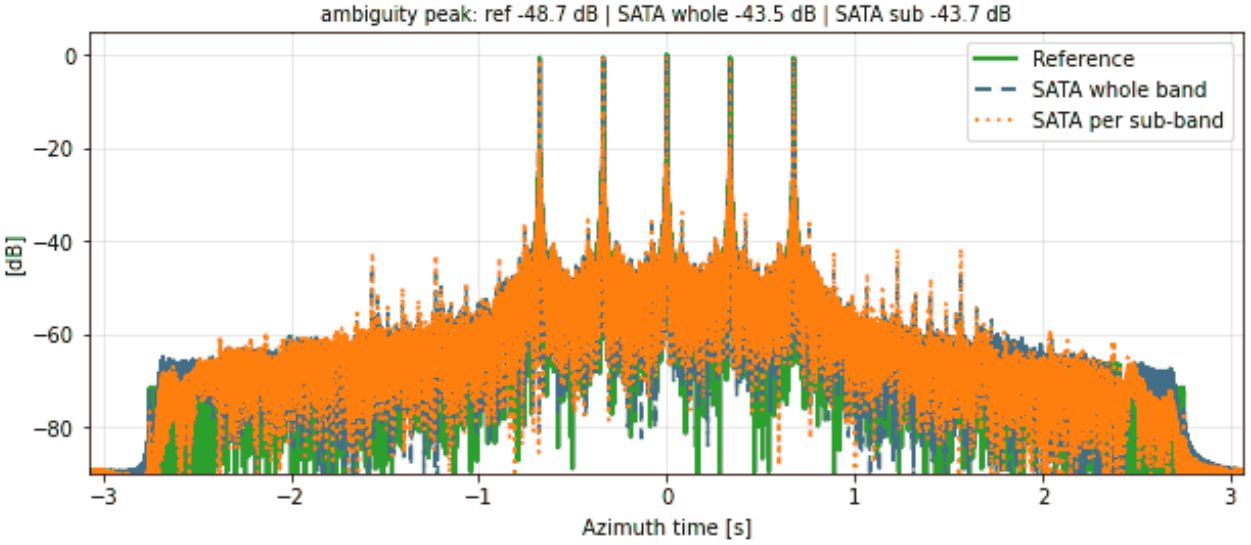

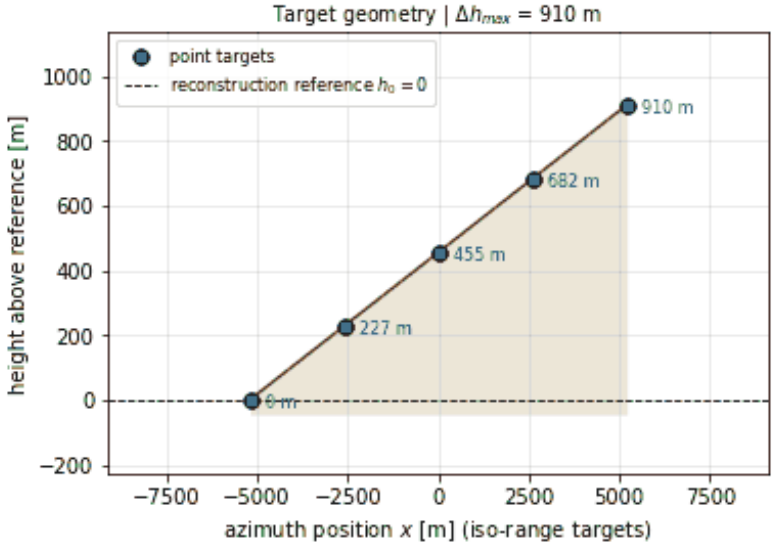



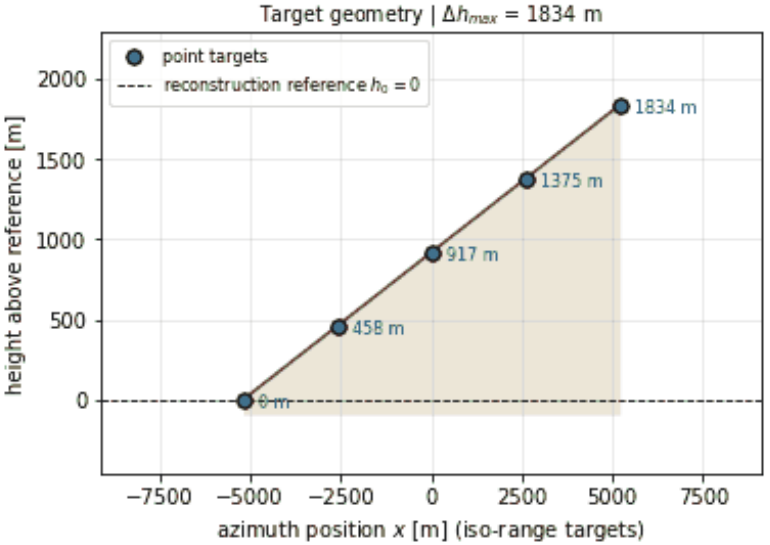



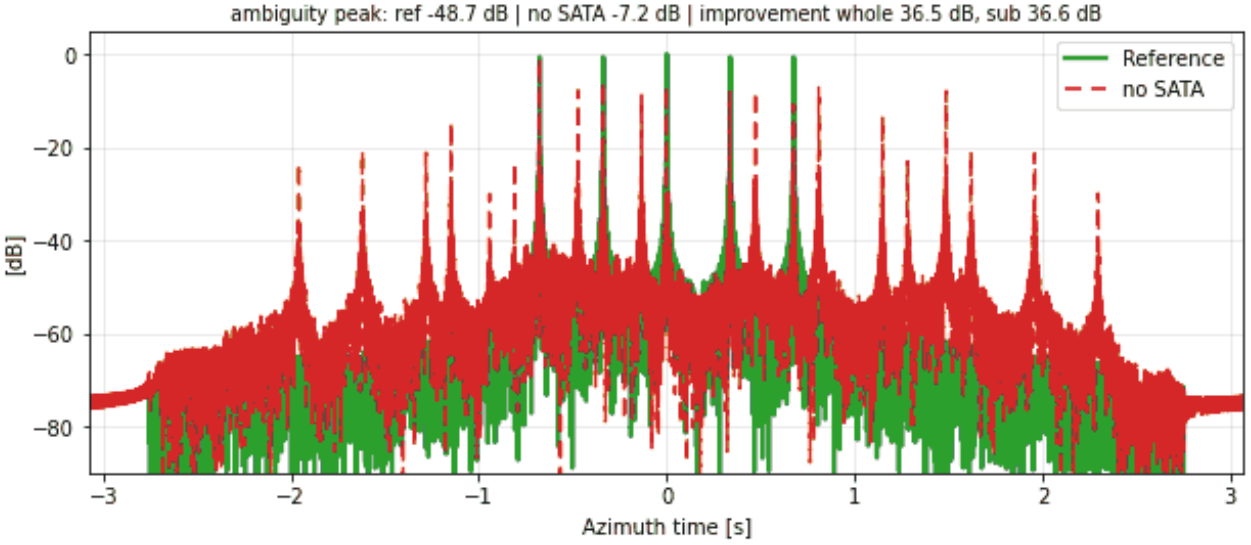



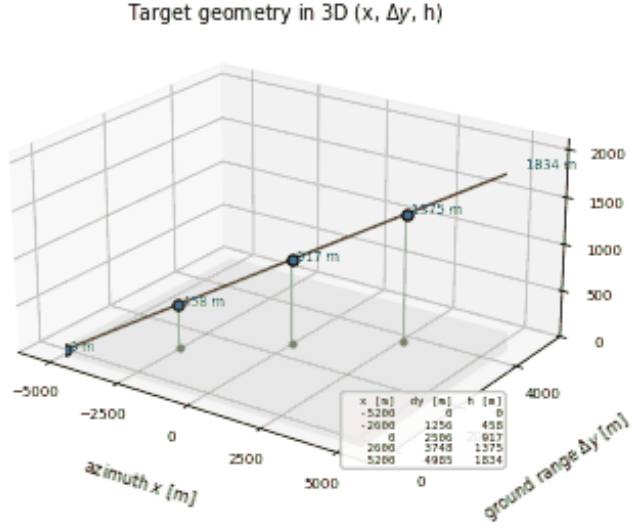
RA-NL-034 | SATA 1D | along-track ramp: N = 5, $\alpha = 10^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

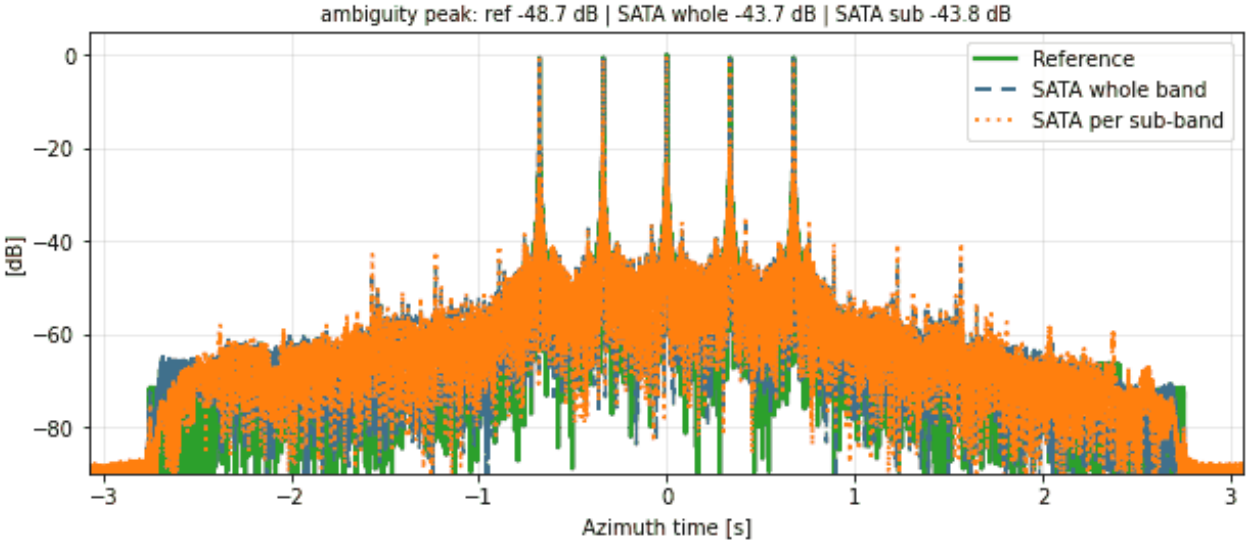





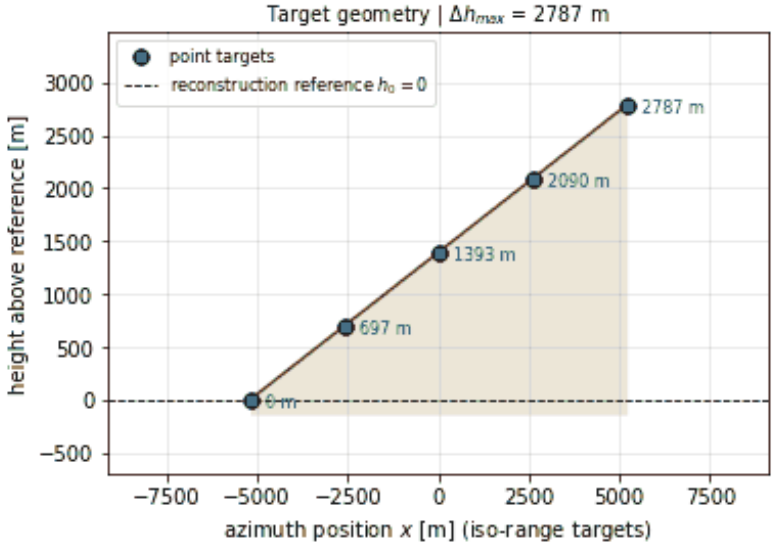



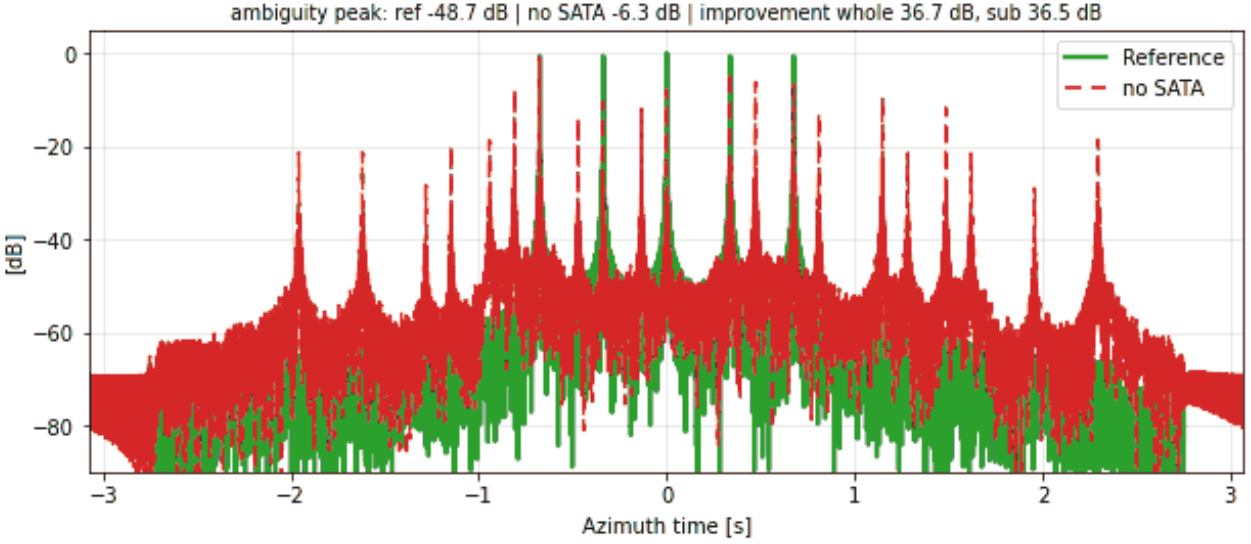



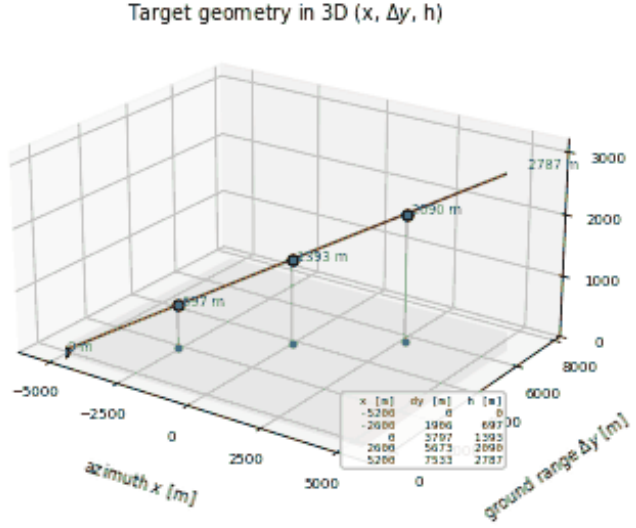
RA-NL-035 | SATA 1D | along-track ramp: N = 5, $\alpha = 15^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

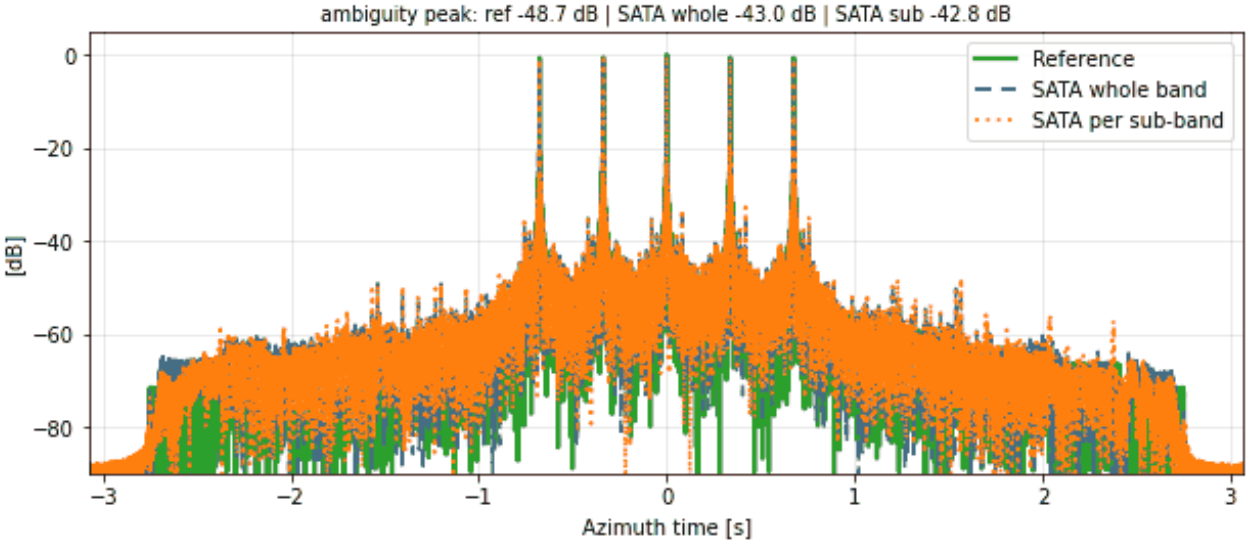






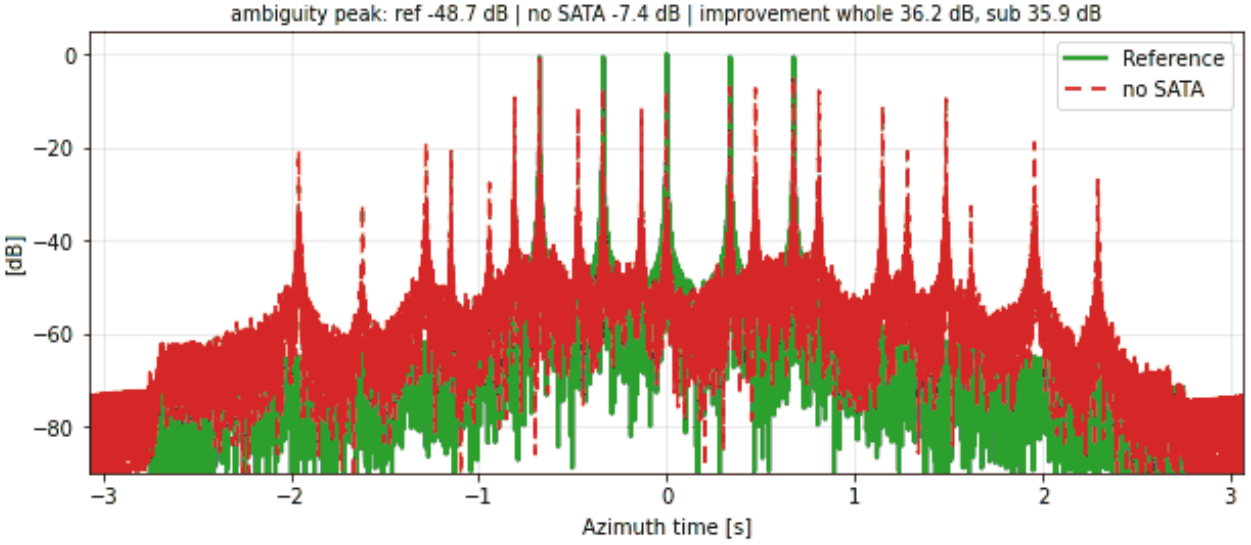



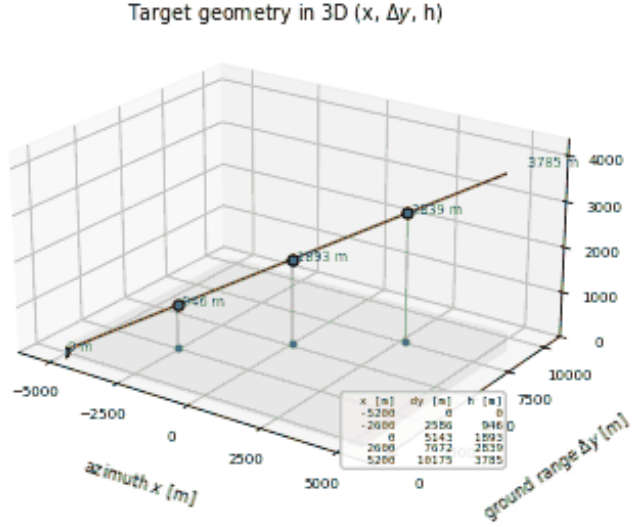



RA-NL-036 | SATA 1D | along-track ramp: N = 5, $\alpha = 20°$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

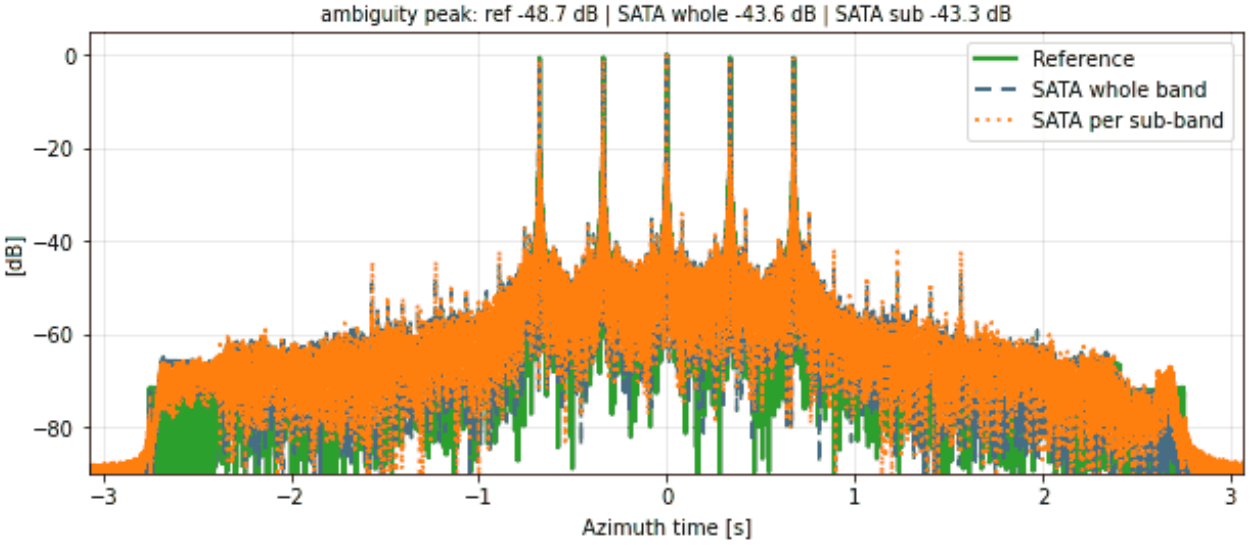


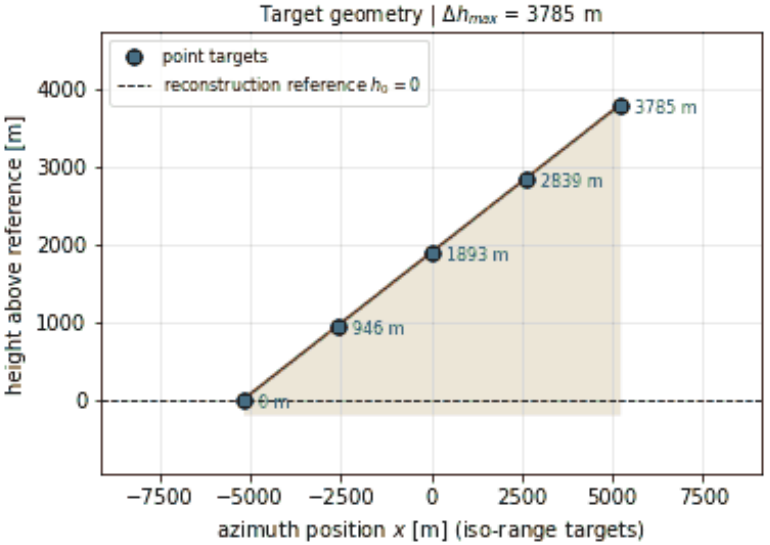



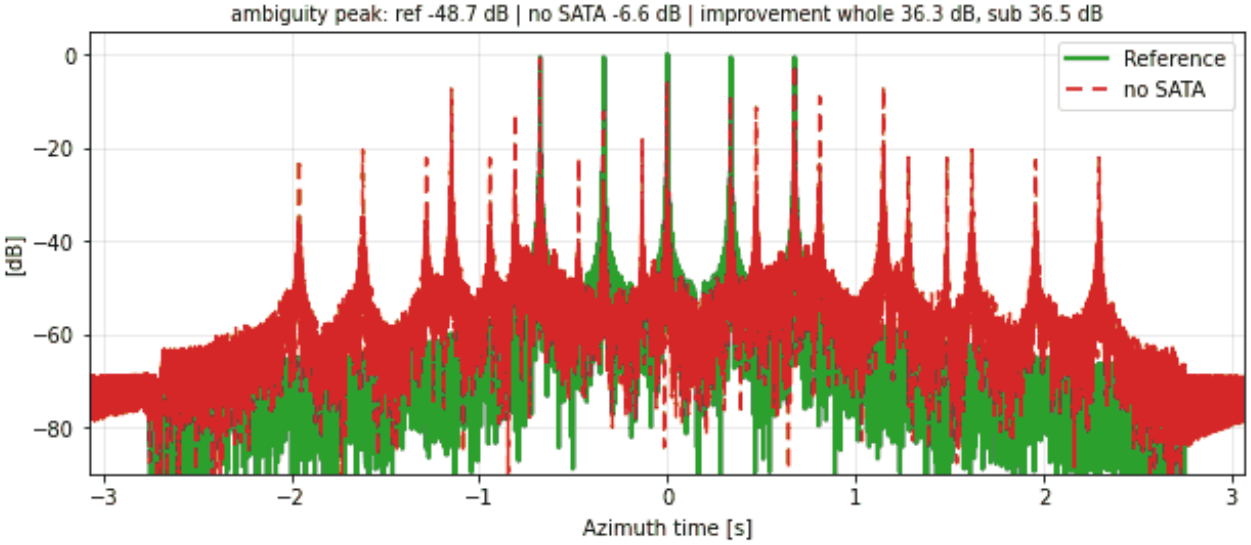



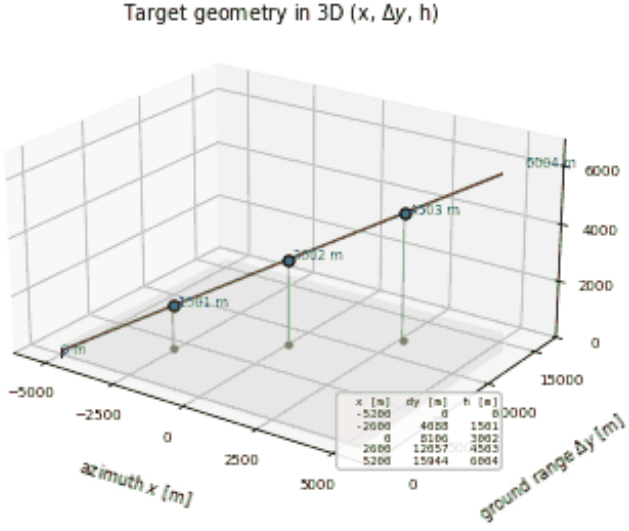



RA-NL-037 | SATA 1D | along-track ramp: N = 5, $\alpha = 30^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

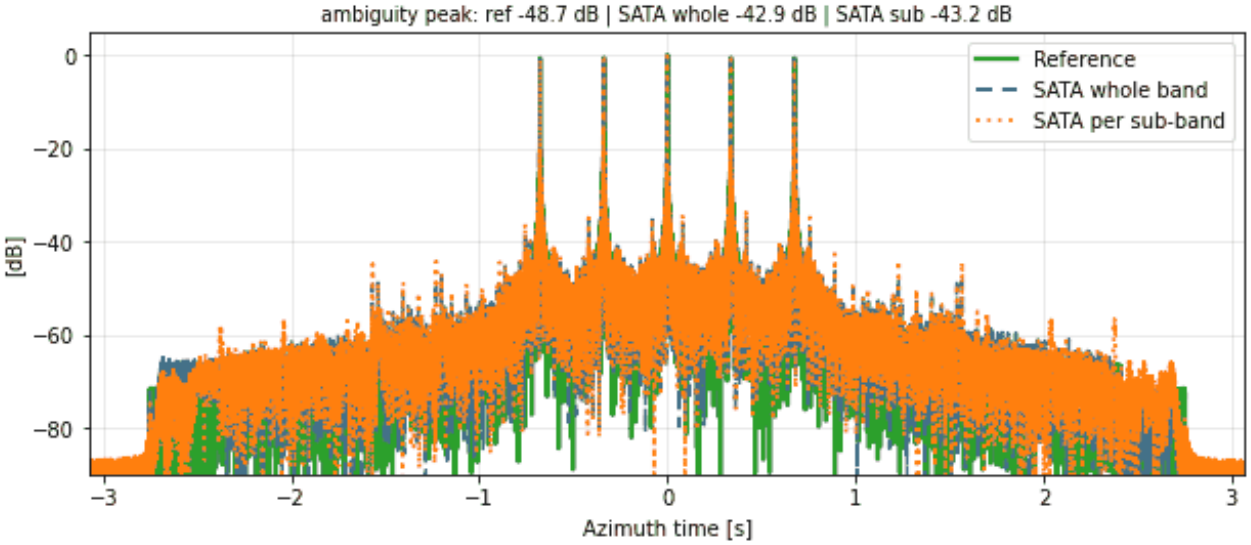


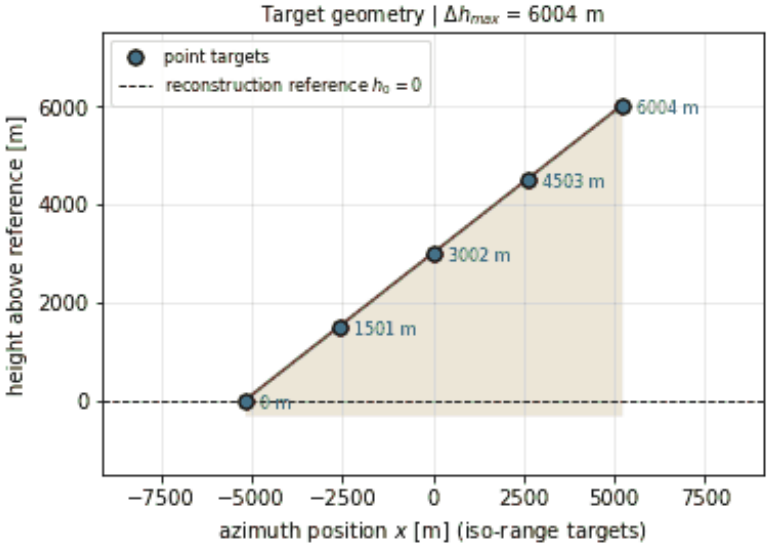



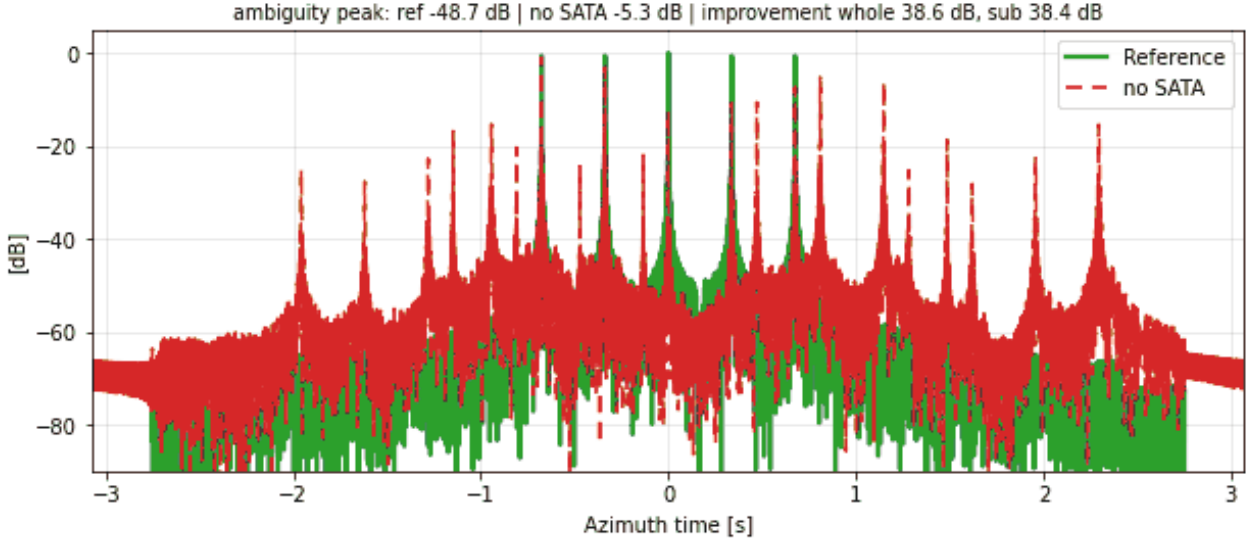



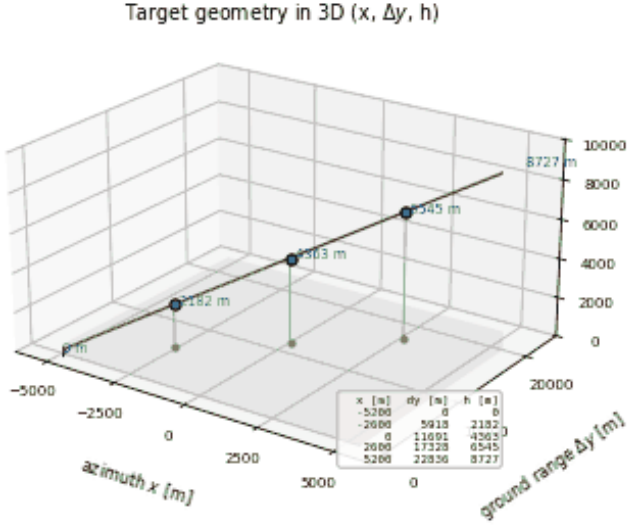



RA-NL-038 | SATA 1D | along-track ramp: N = 5, $\alpha = 40°$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

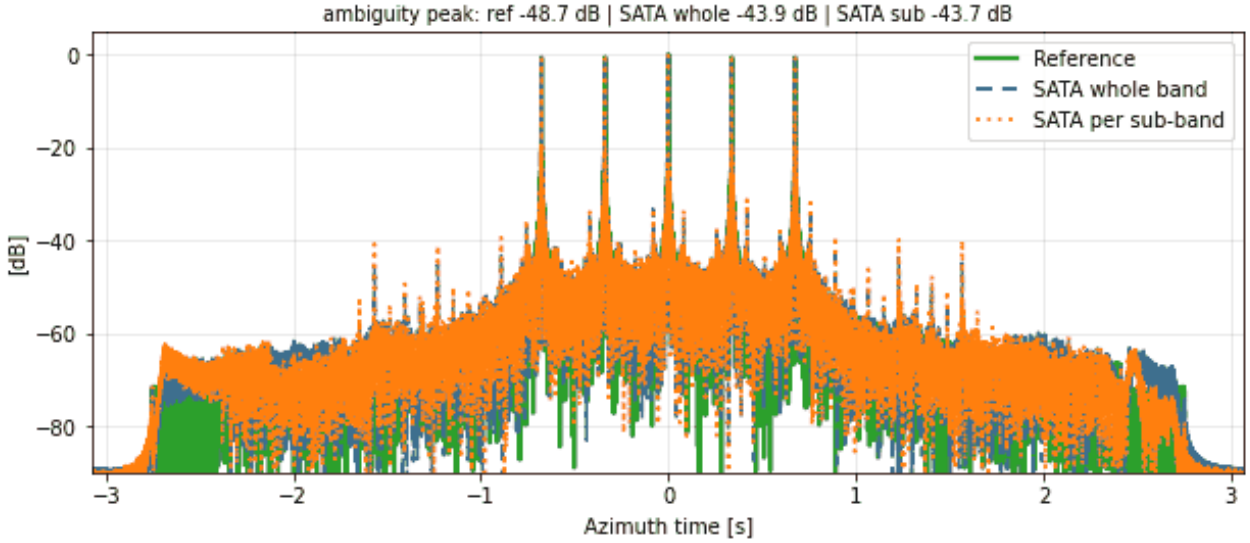

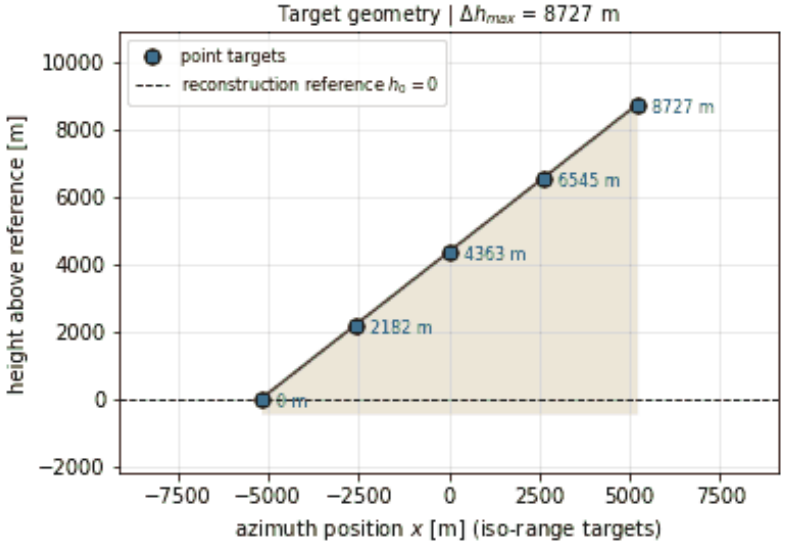



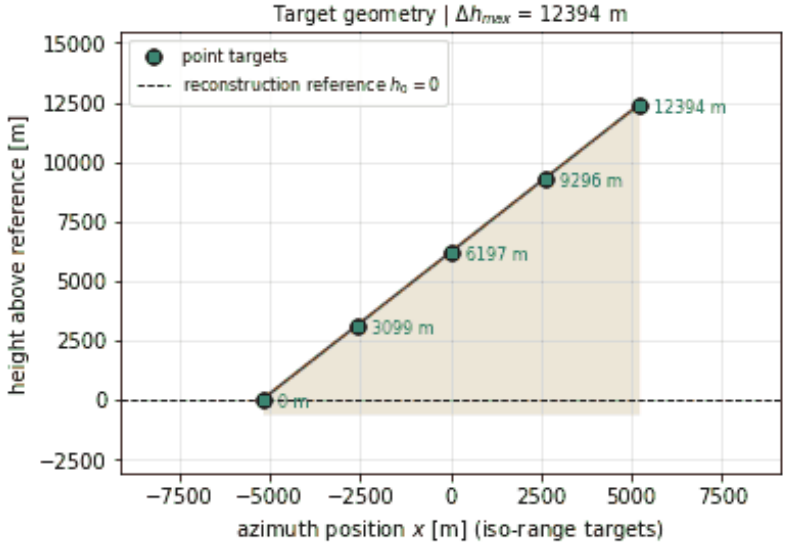



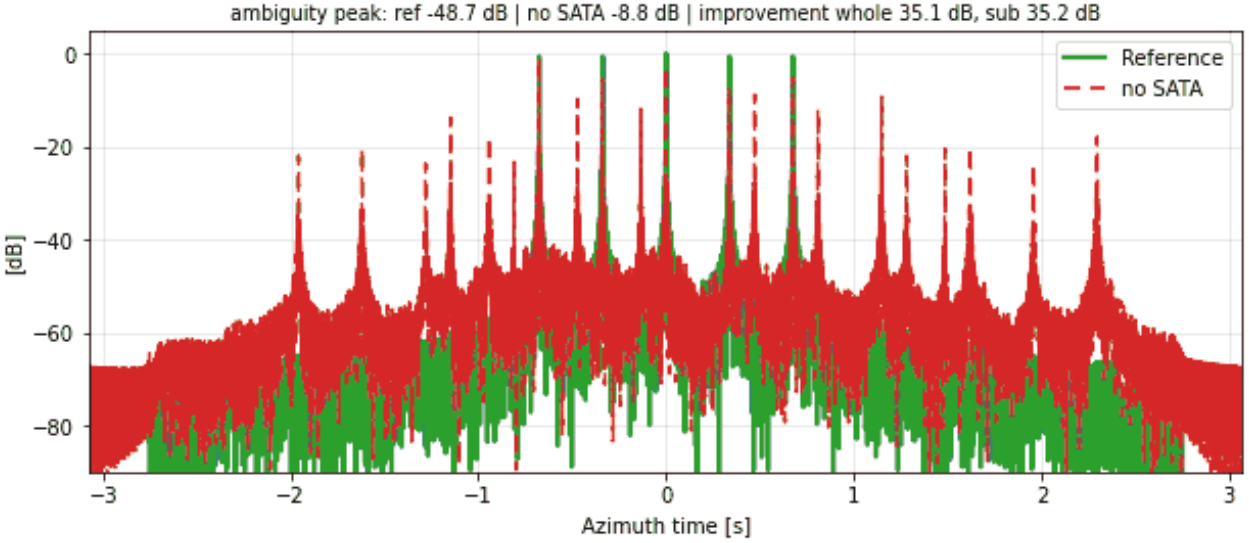



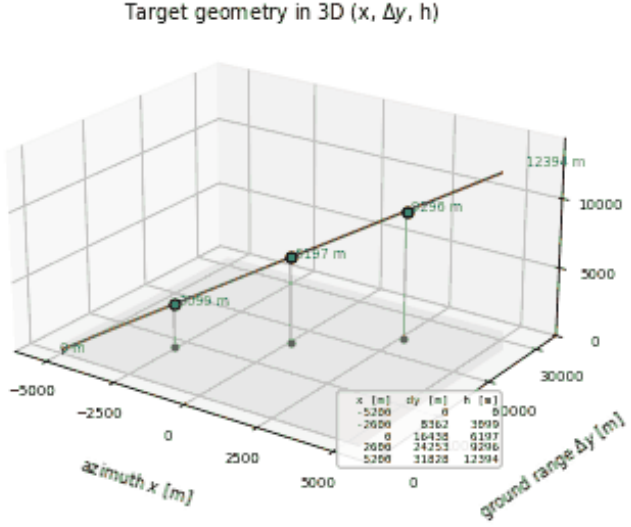
RA-NL-039 | SATA 1D | along-track ramp: N = 5, $\alpha = 50°$ (heights $j \cdot 2600\tan\alpha$), targets 2.6 km apart (normal distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

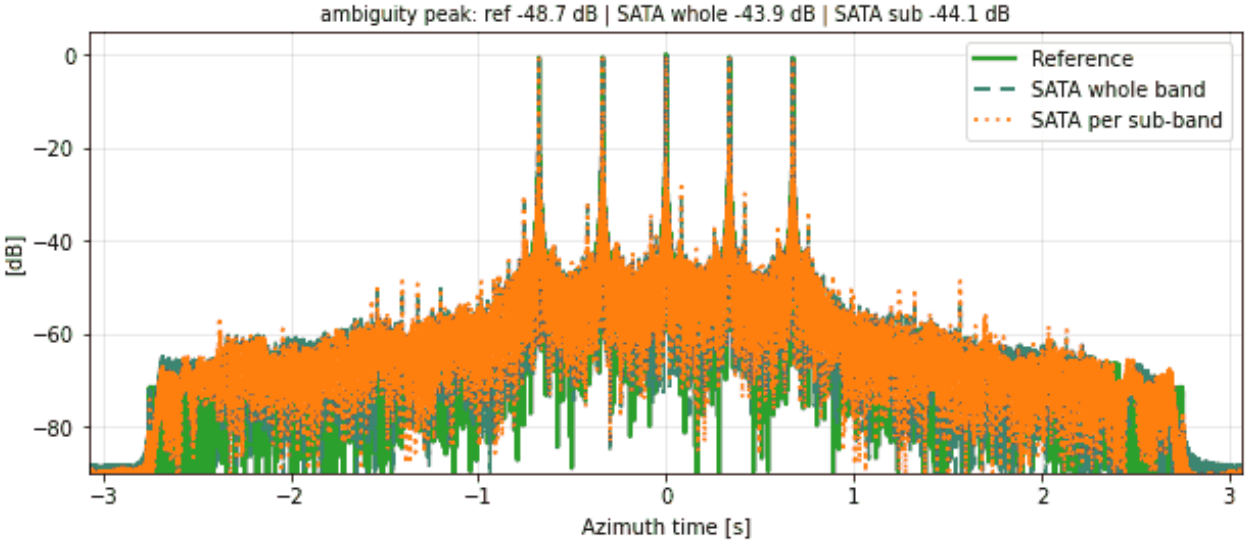






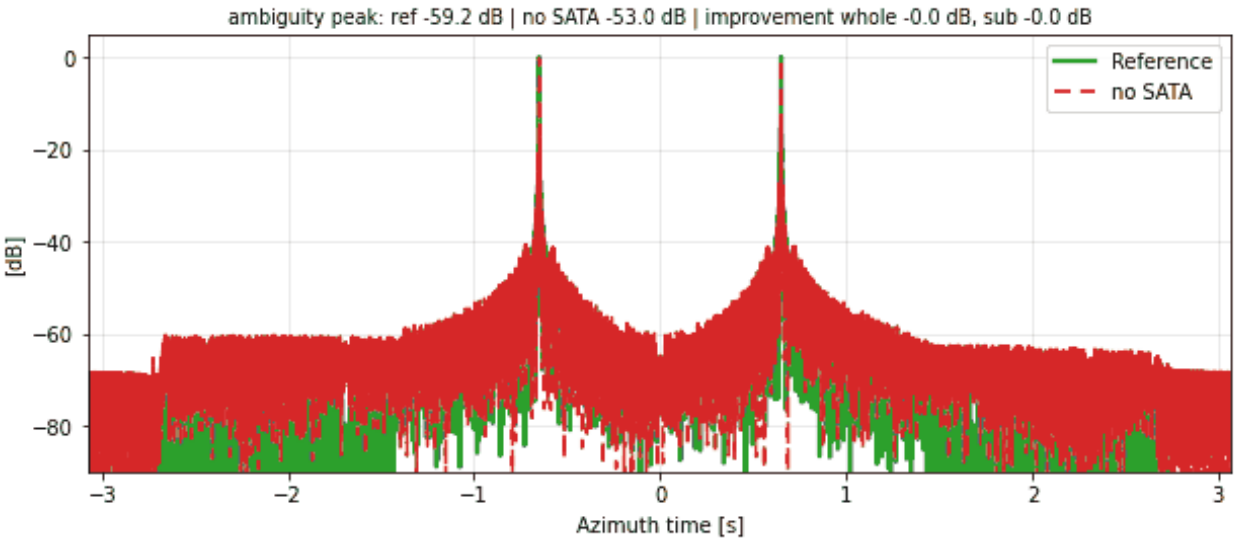



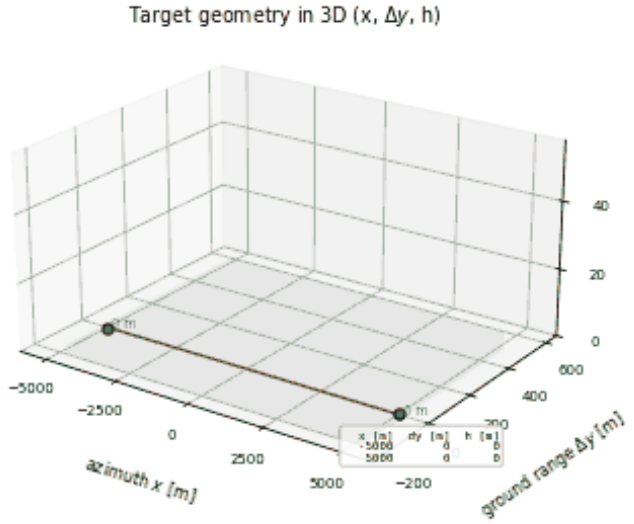



RA-LS-001 | SATA 1D | along-track ramp: N = 2, $\alpha = 0.1°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

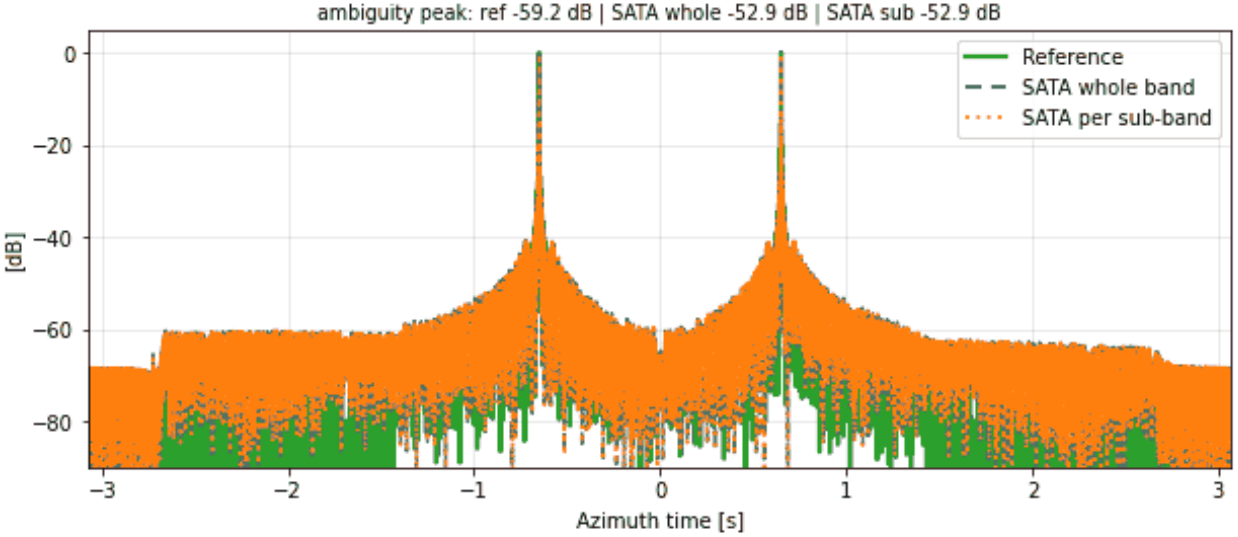


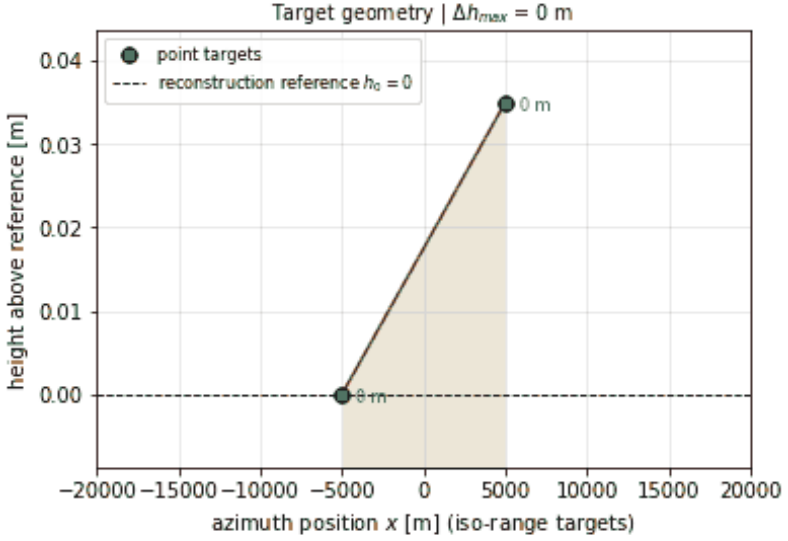



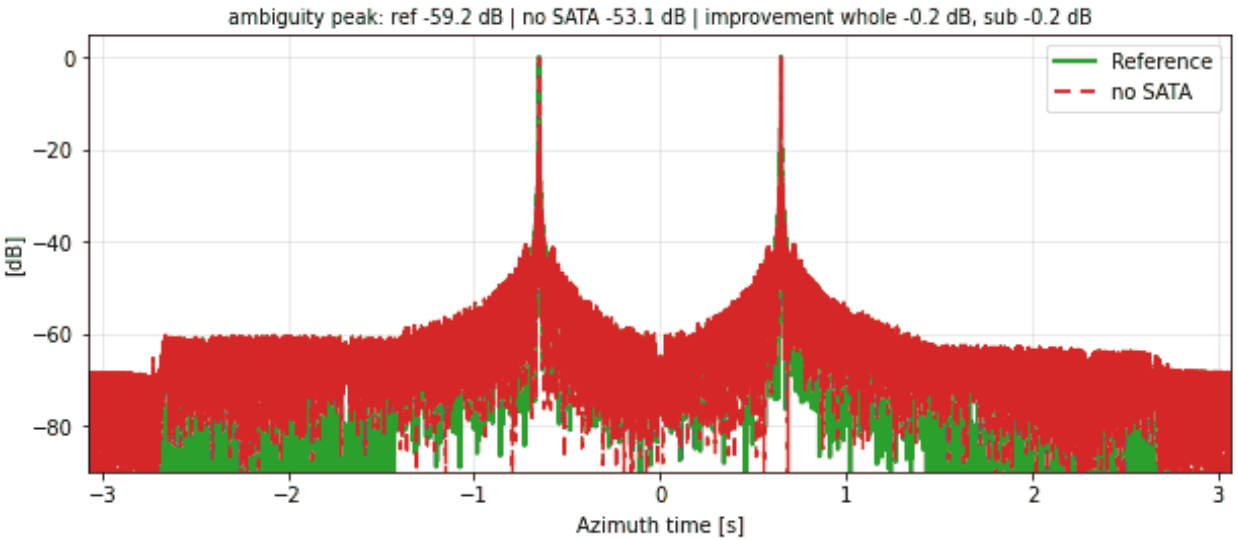



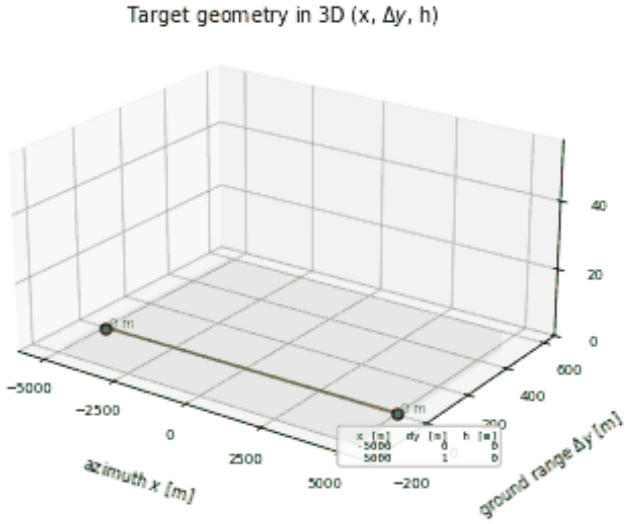



RA-LS-002 | SATA 1D | along-track ramp: N = 2, $\alpha = 1°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

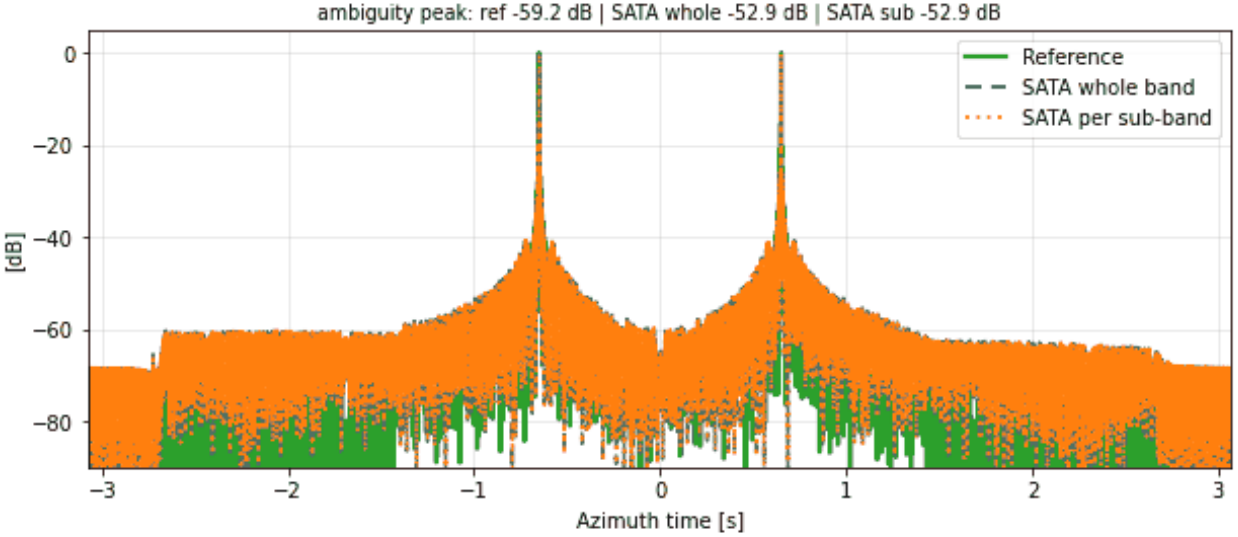

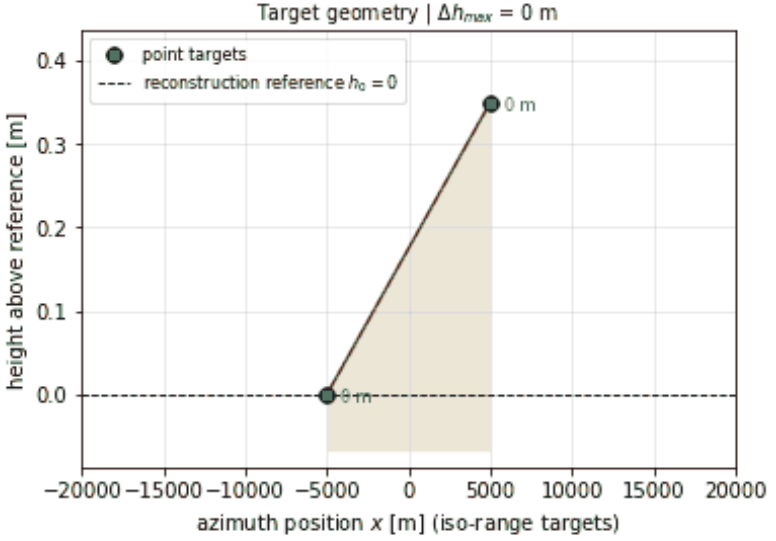



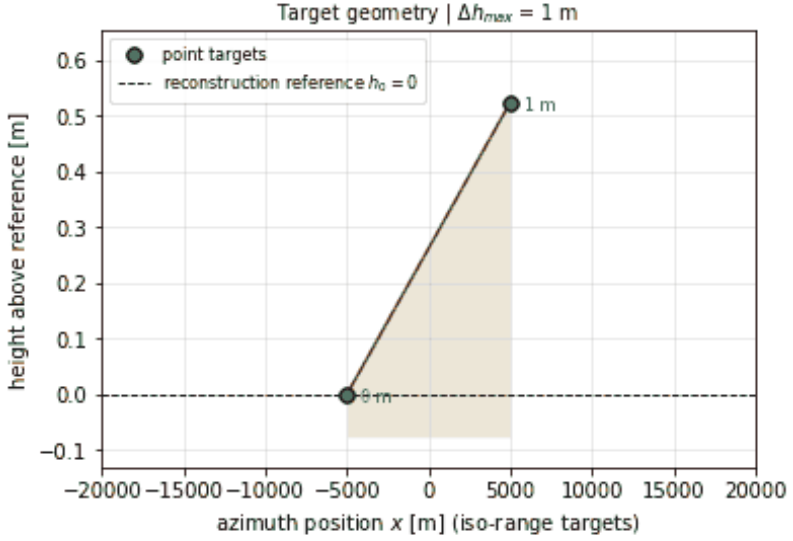



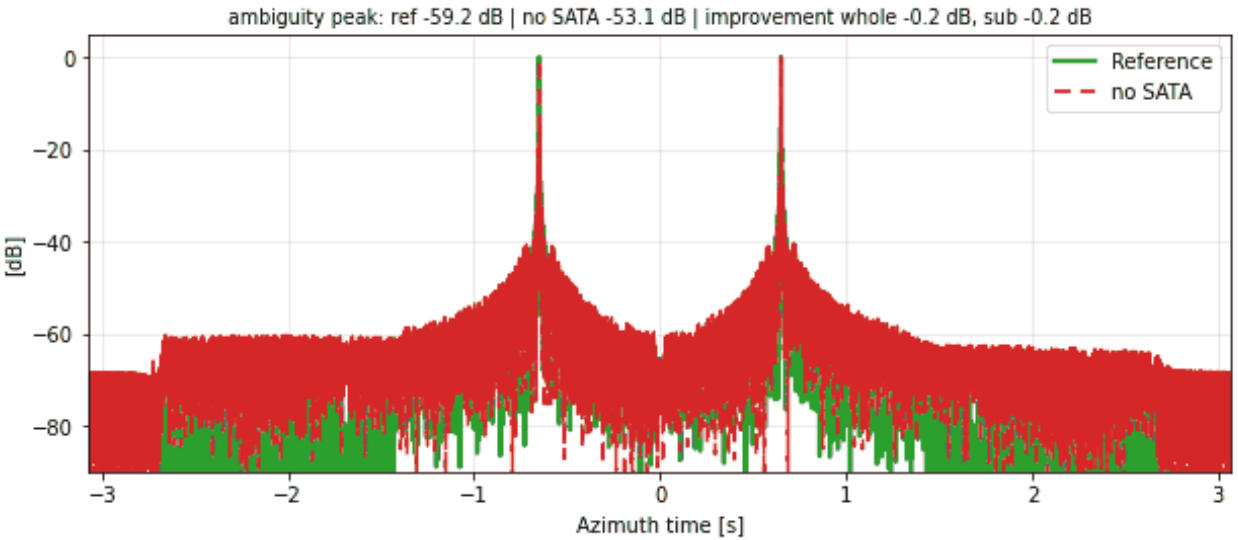



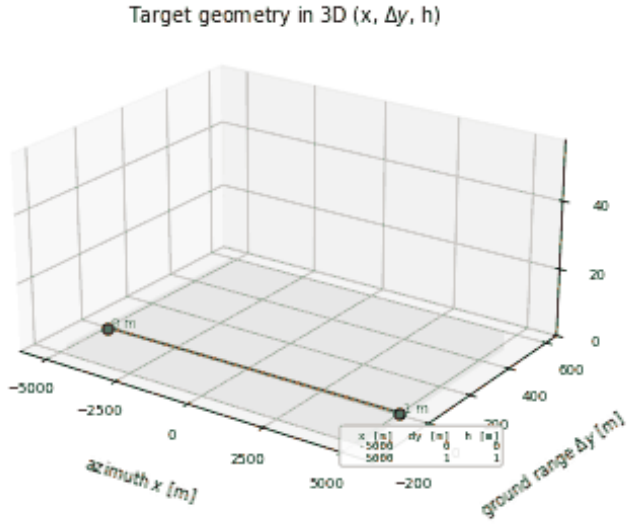
RA-LS-003 | SATA 1D | along-track ramp: N = 2, $\alpha = 1.5°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a = 1235$ Hz | $\Delta b_{at} = 7.69$ m (DPCA)

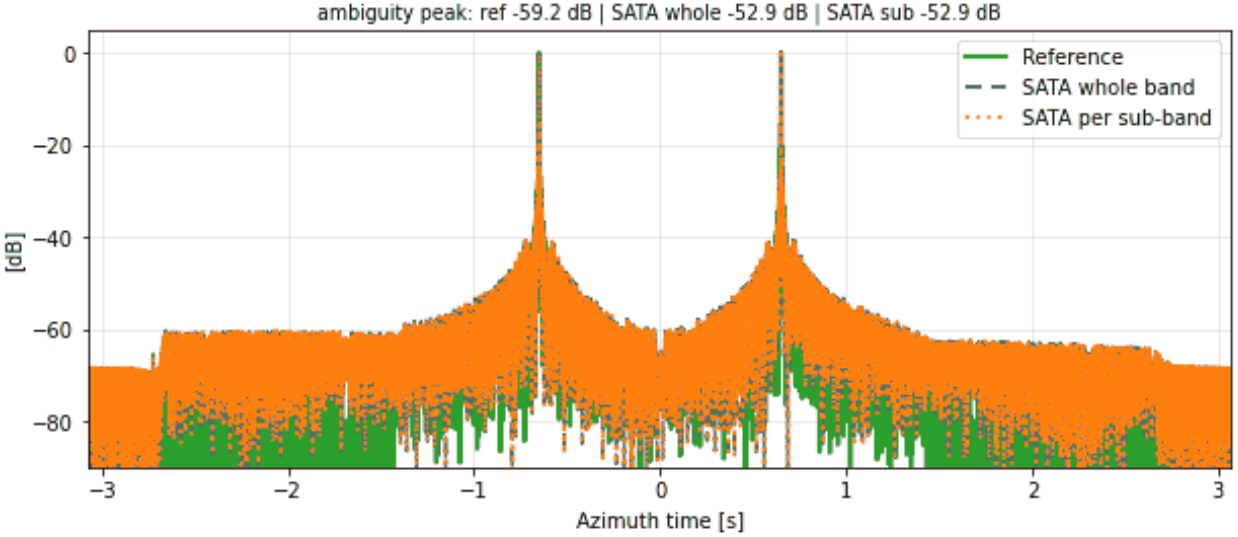






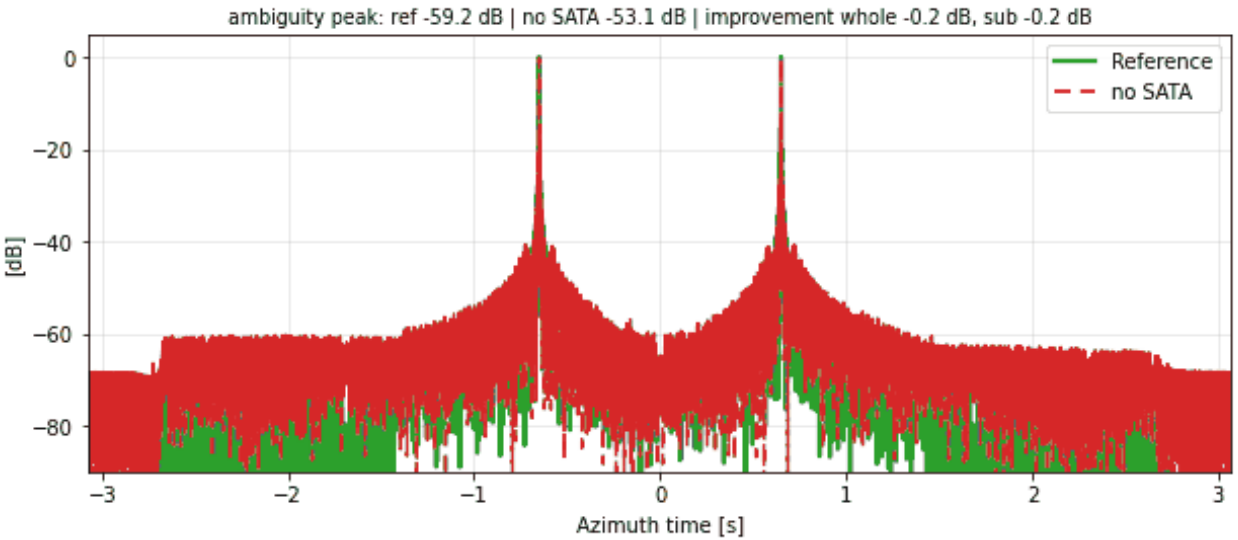



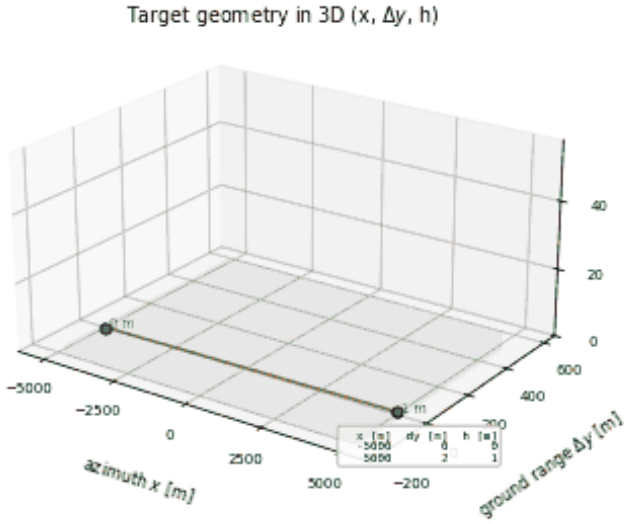



RA-LS-004 | SATA 1D | along-track ramp: N = 2, $\alpha = 2°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

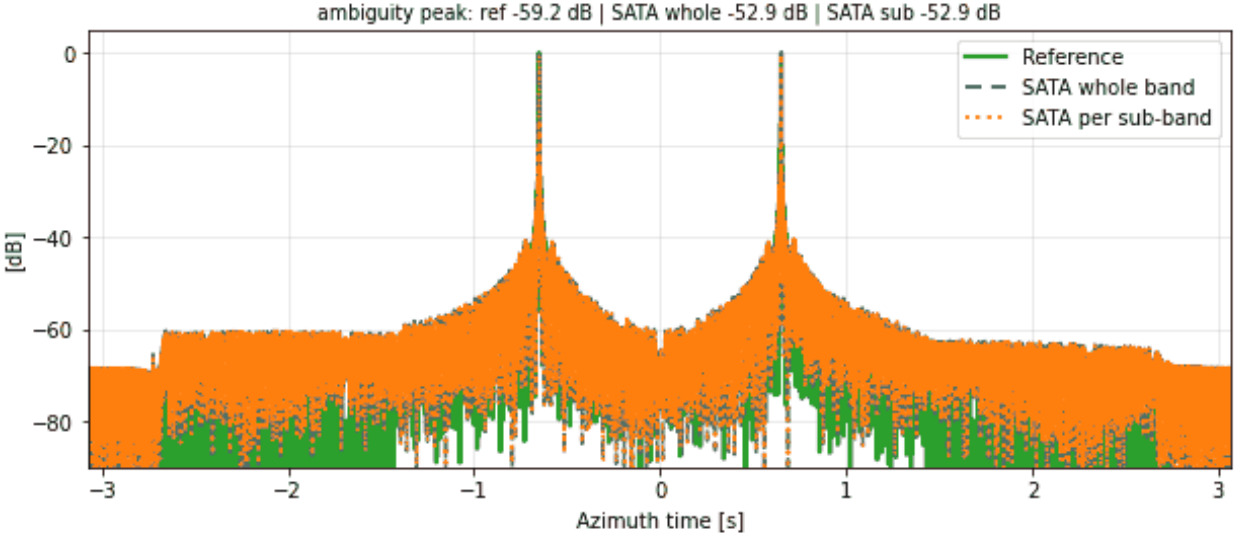

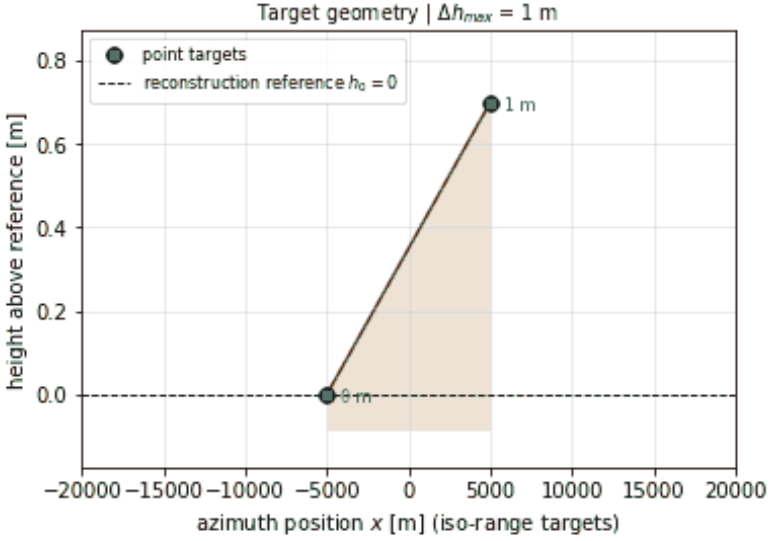



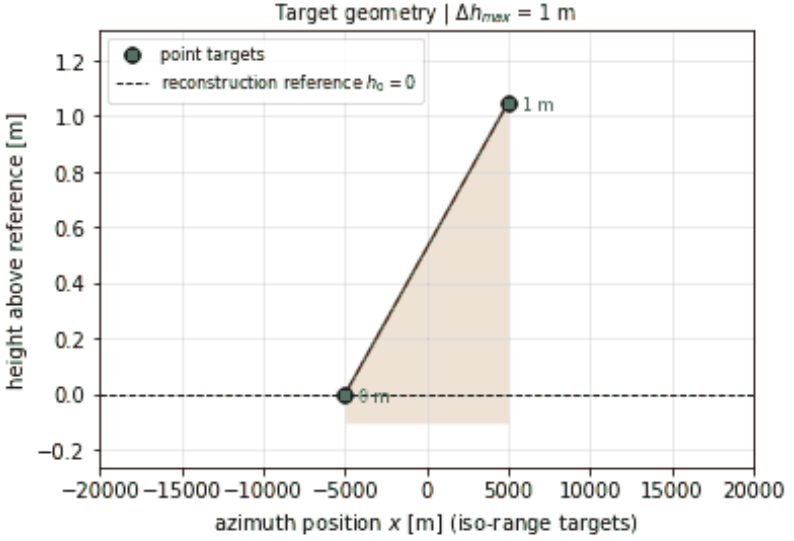



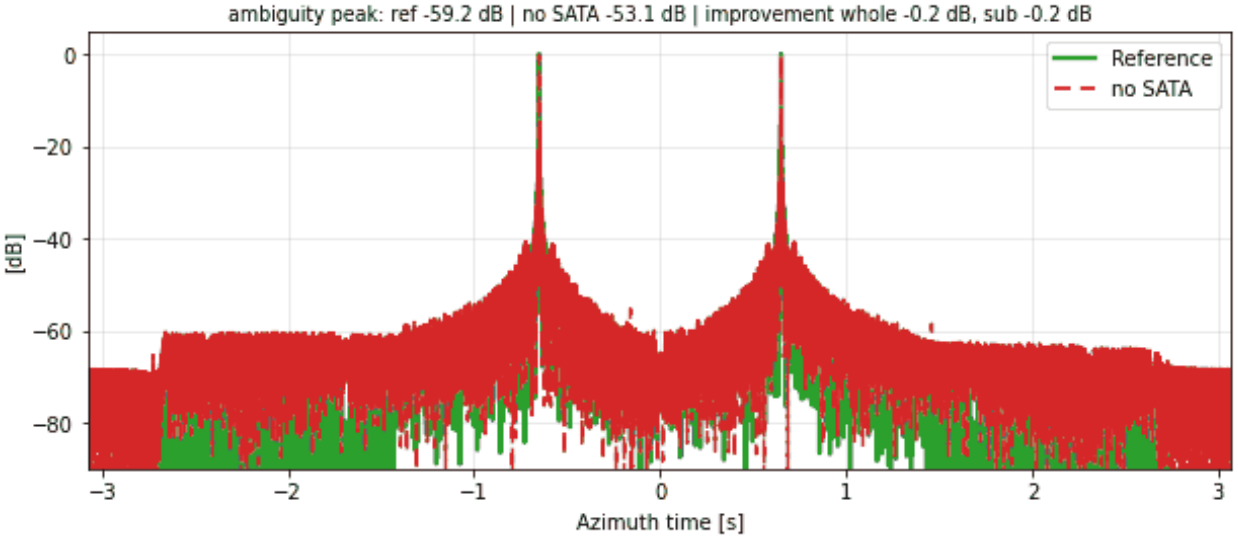



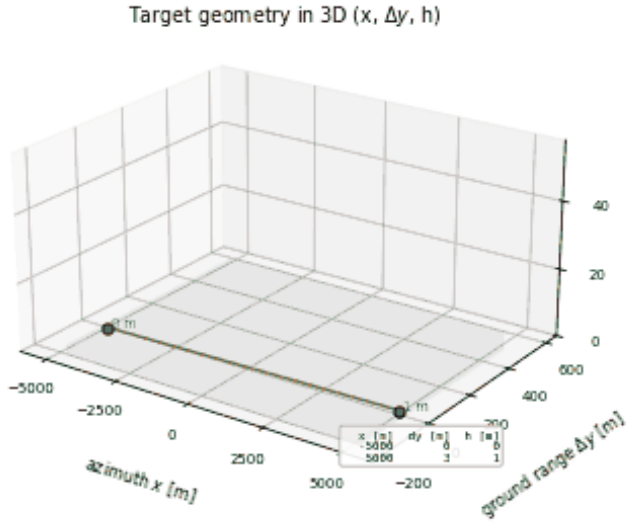
RA-LS-005 | SATA 1D | along-track ramp: N = 2, $\alpha = 3°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

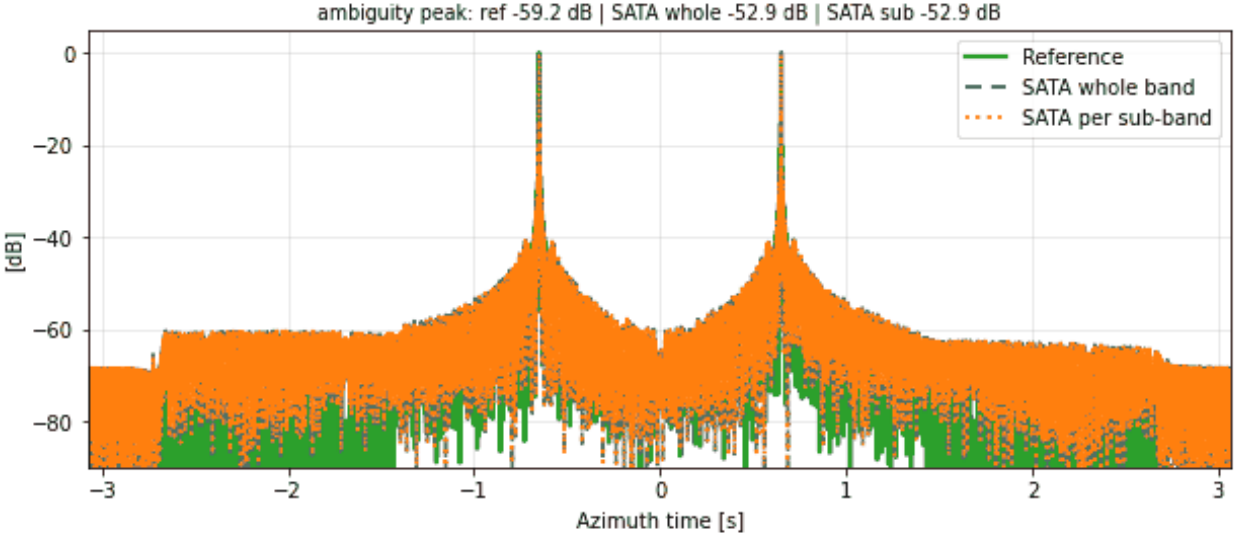






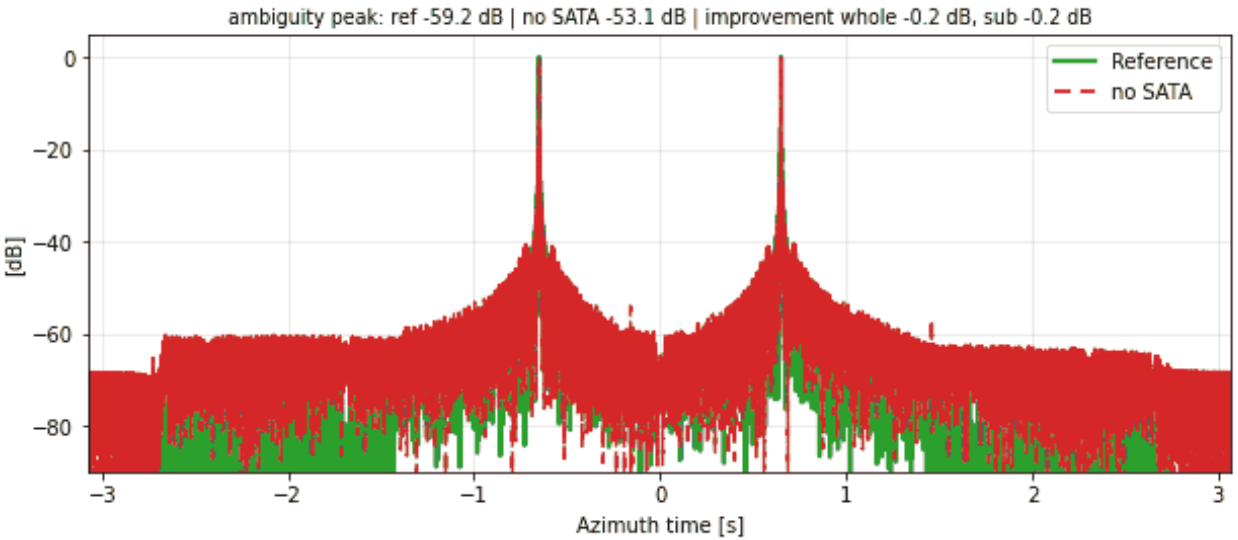



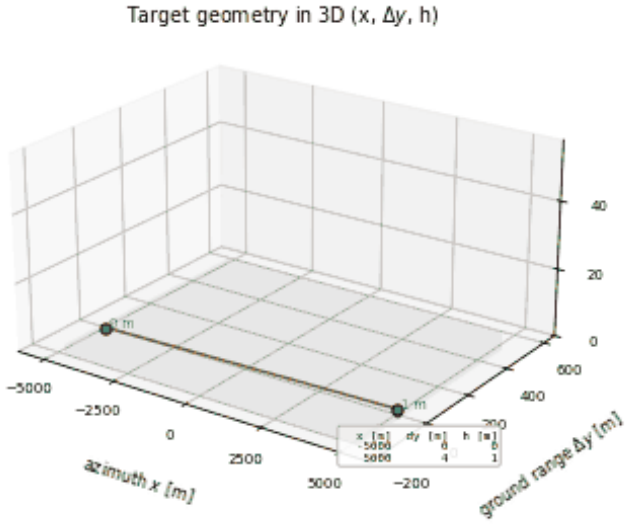



RA-LS-006 | SATA 1D | along-track ramp: N = 2, $\alpha = 4°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

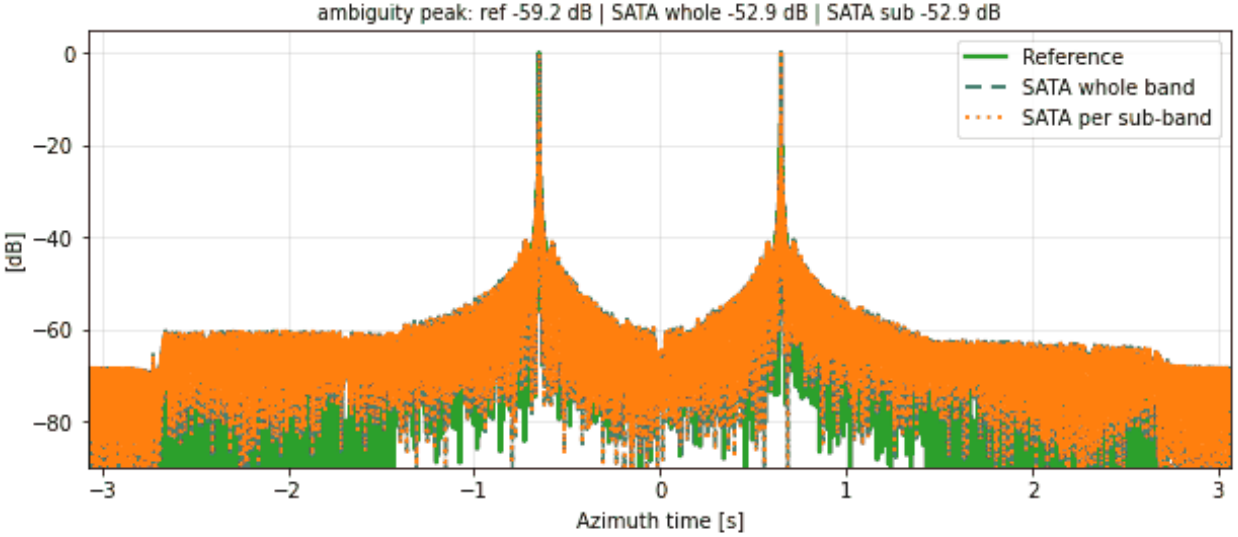

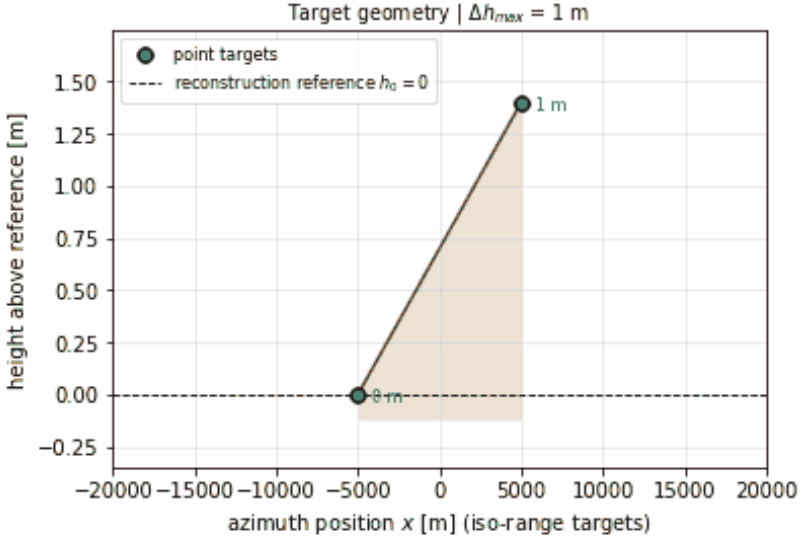



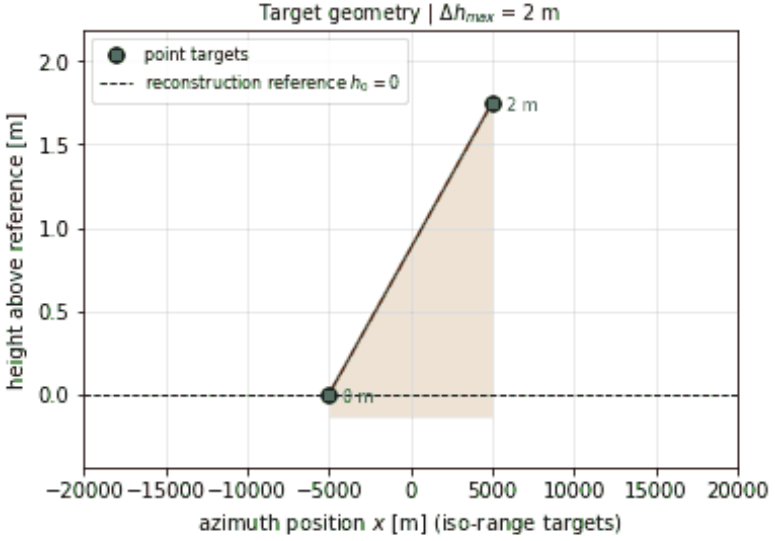



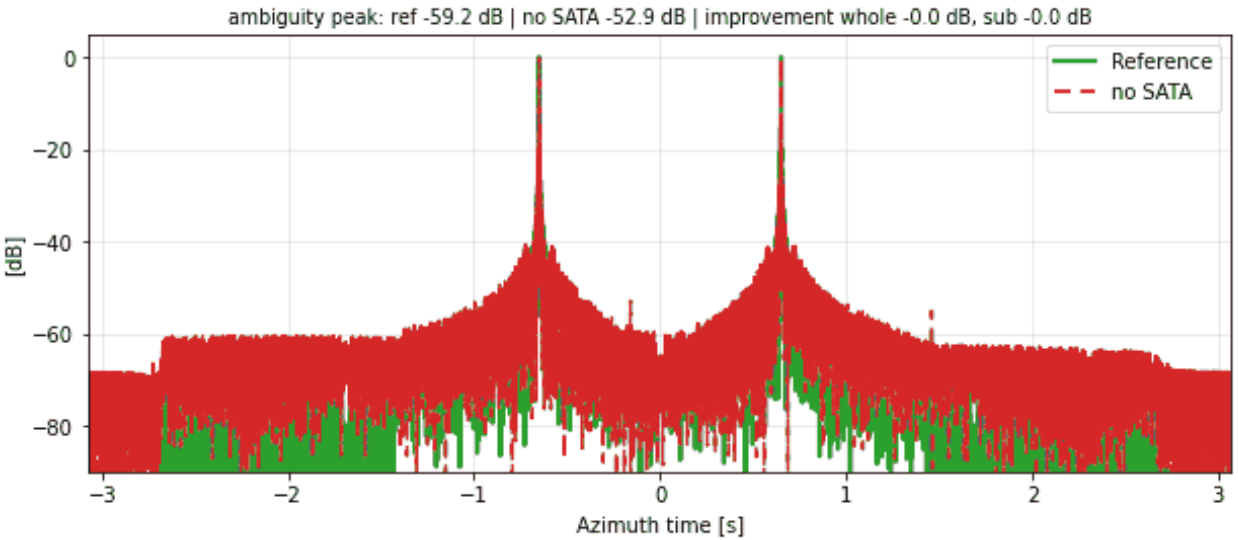



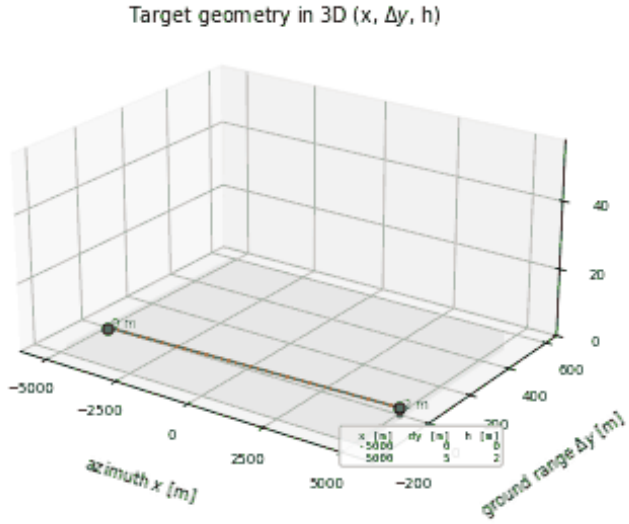
RA-LS-007 | SATA 1D | along-track ramp: N = 2, $\alpha = 5°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

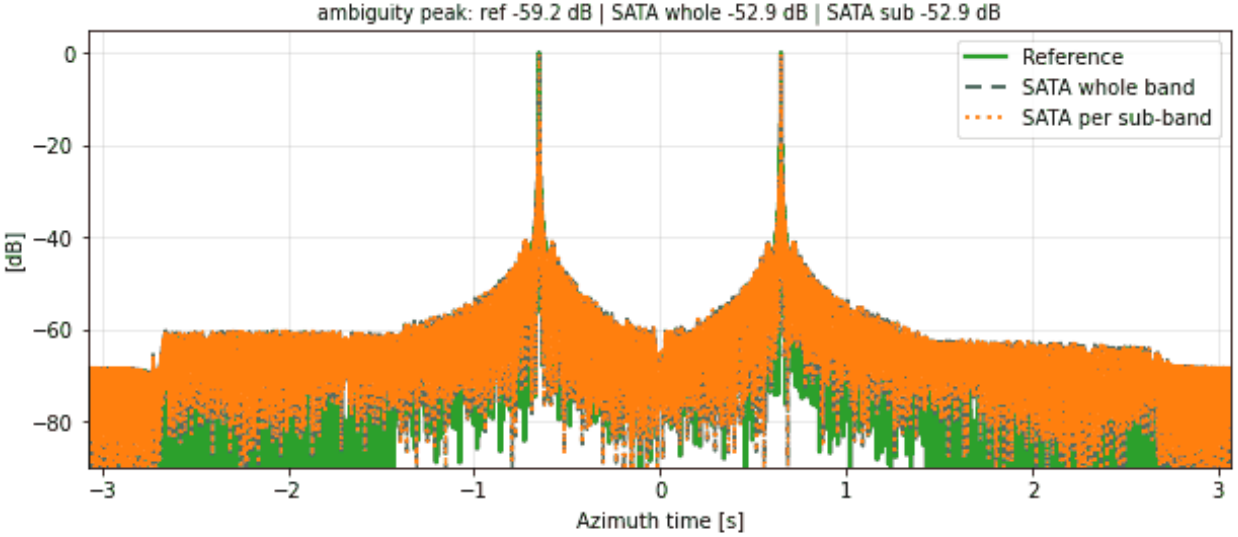





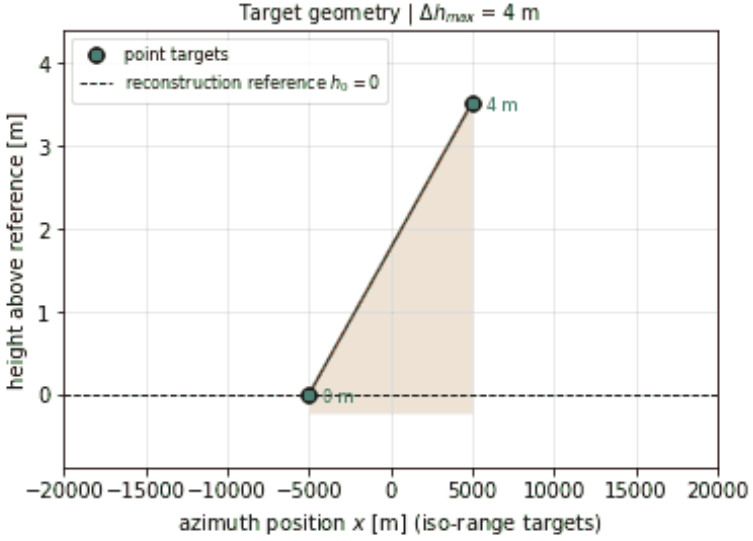



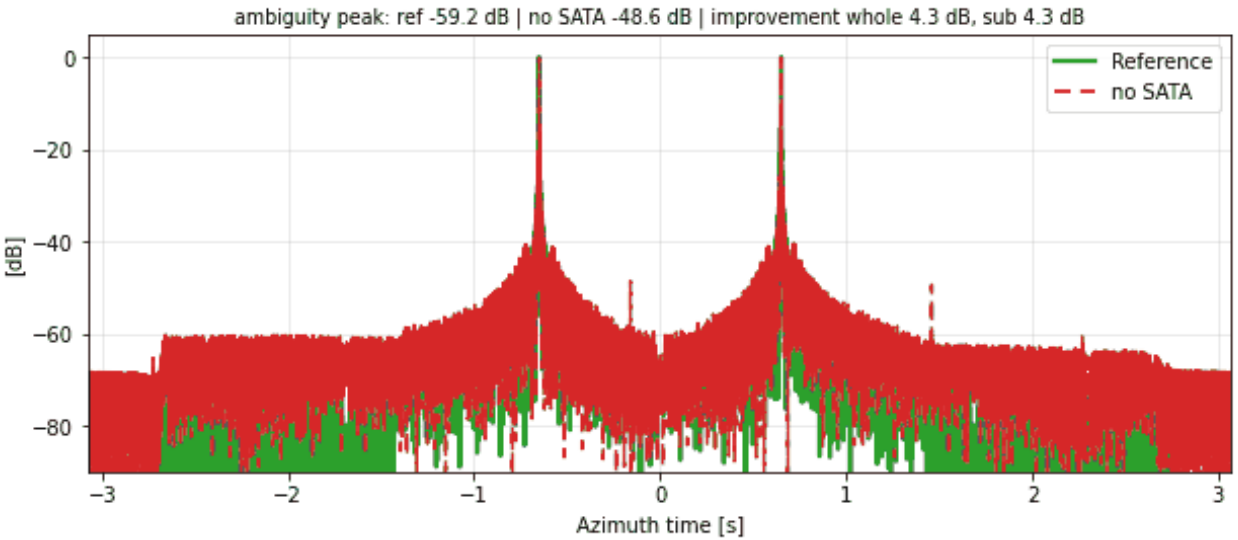



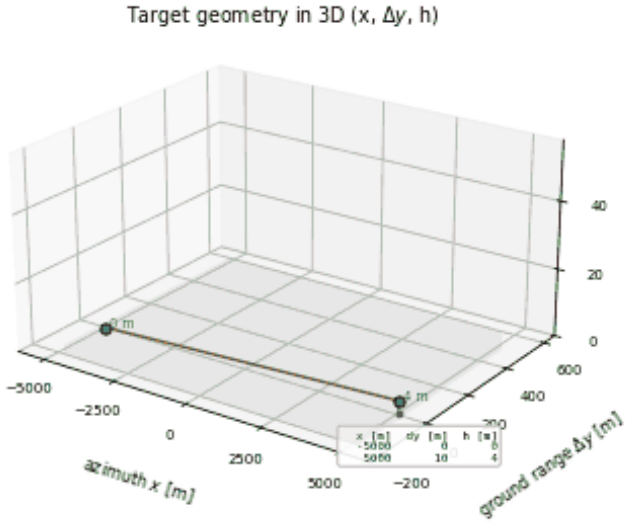
RA-LS-008 | SATA 1D | along-track ramp: N = 2, $\alpha = 10^\circ$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

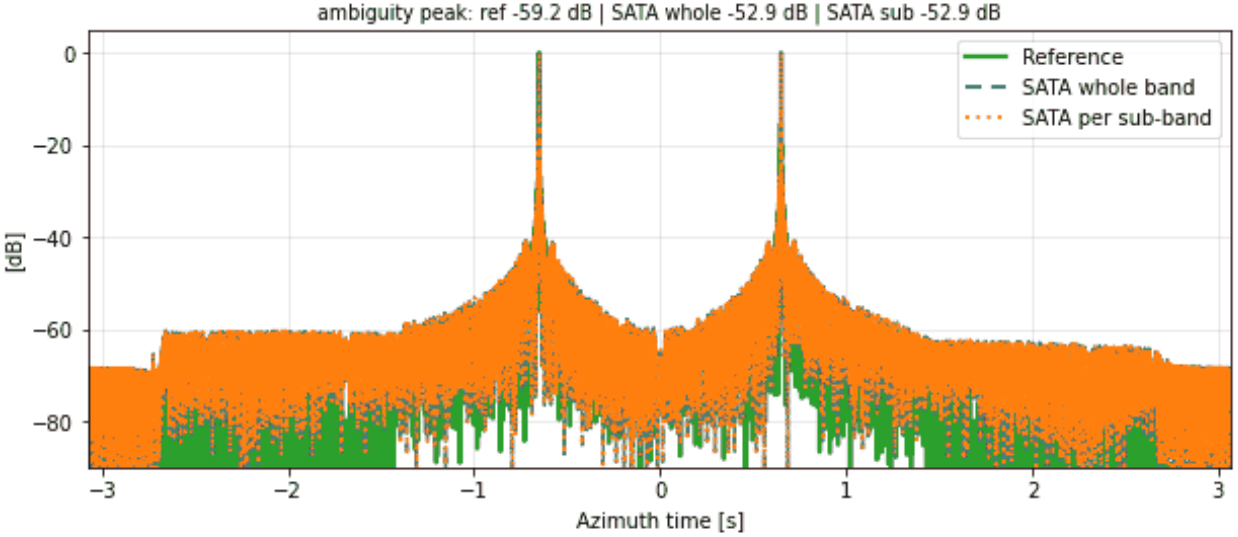





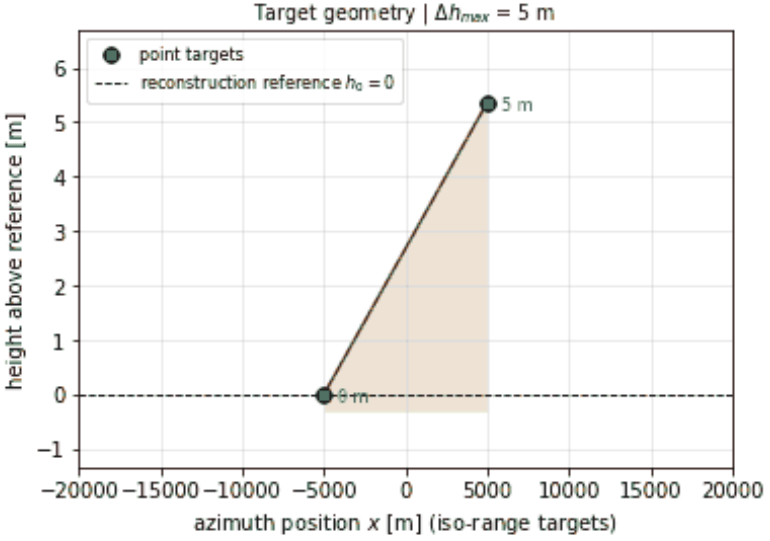



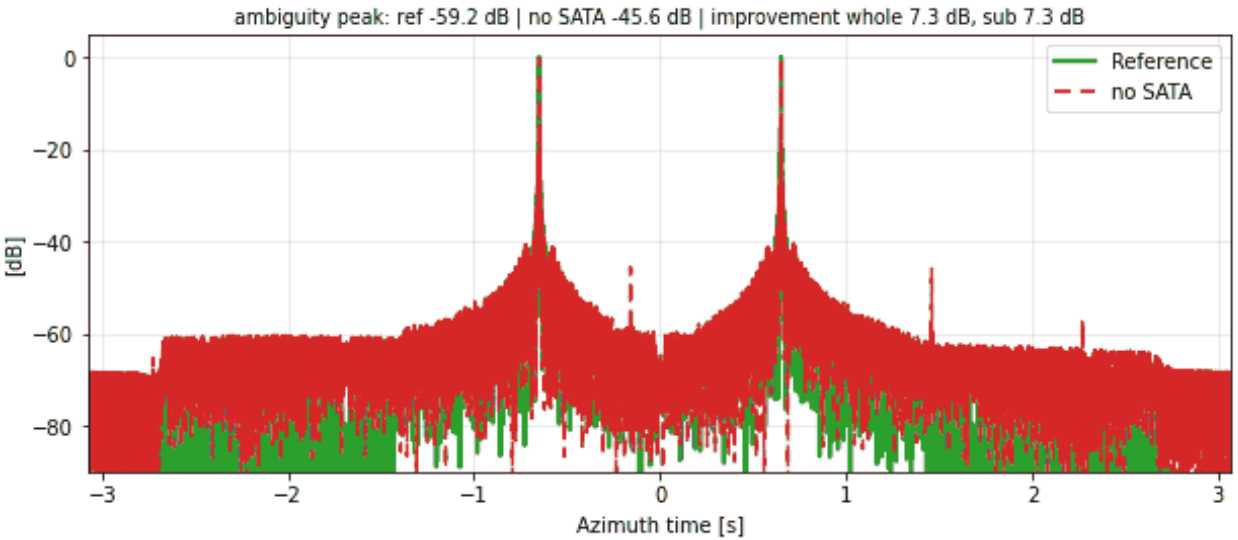



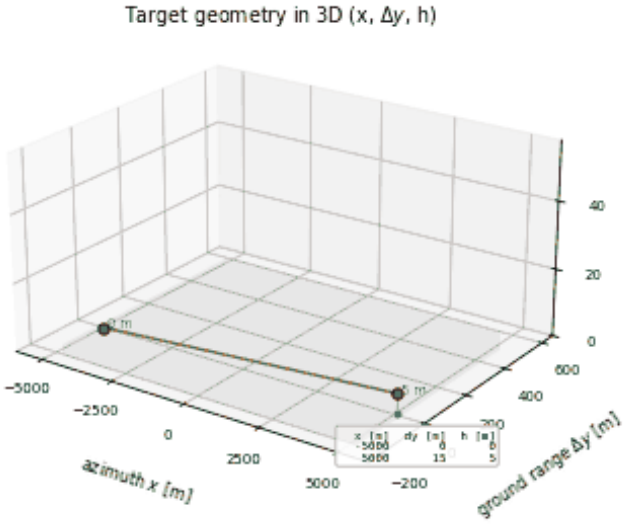
RA-LS-009 | SATA 1D | along-track ramp: N = 2, $\alpha = 15°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

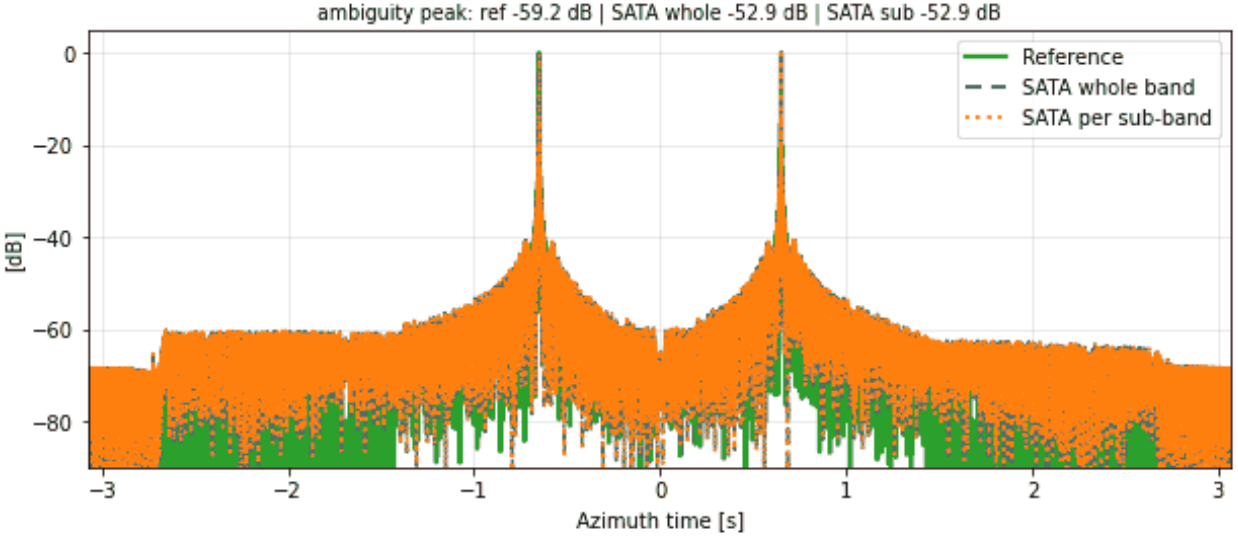





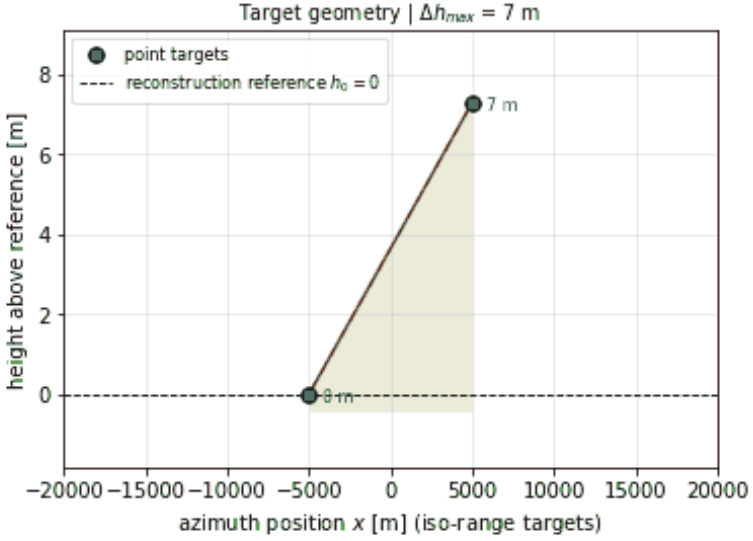



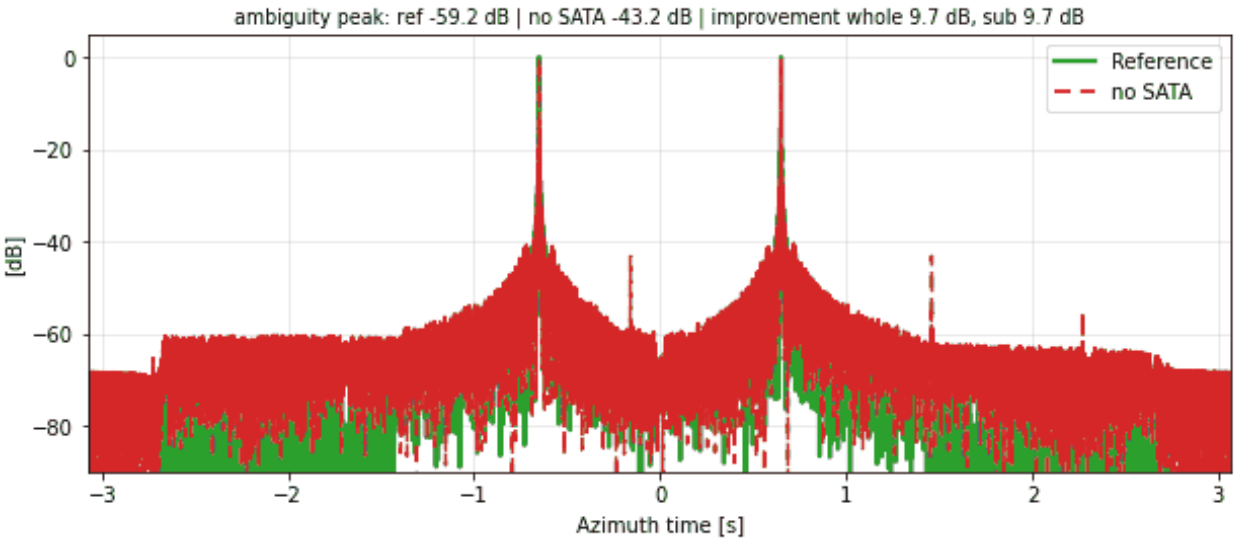



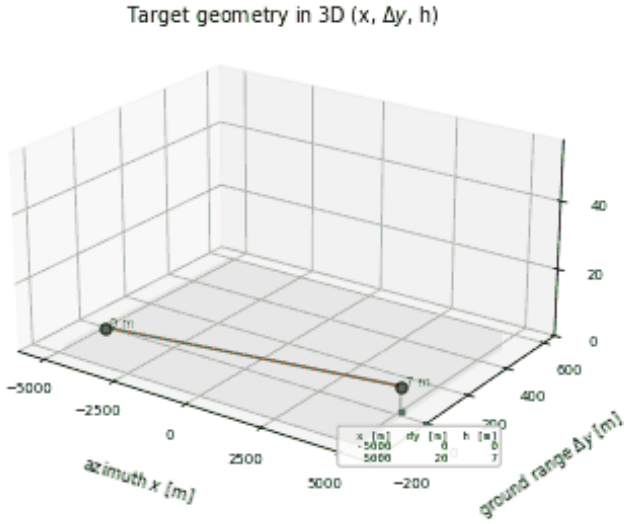
RA-LS-010 | SATA 1D | along-track ramp: N = 2, $\alpha = 20°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

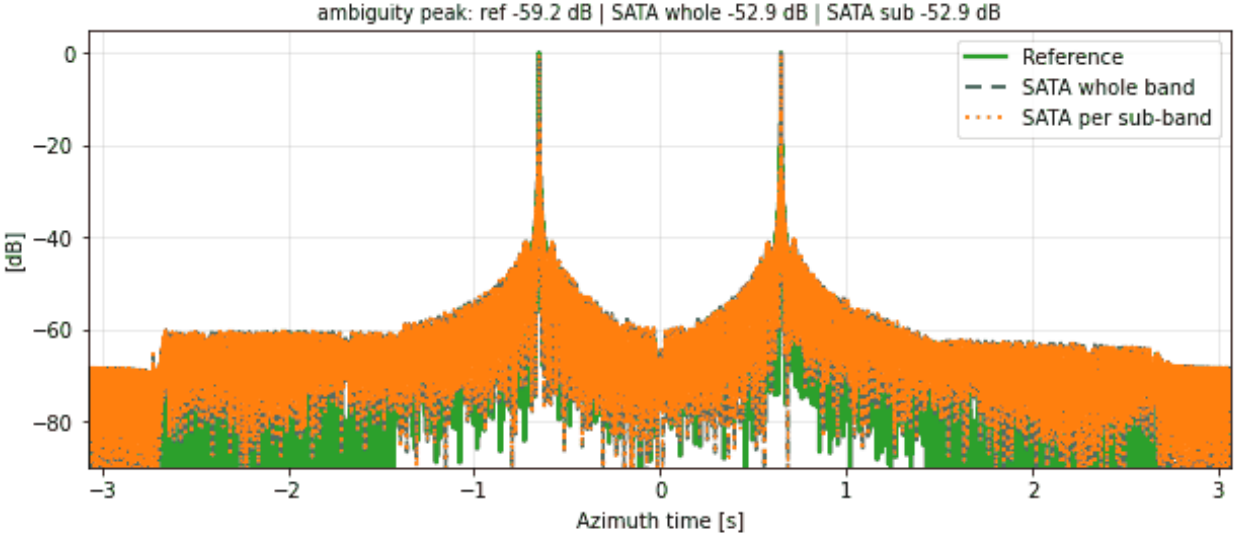






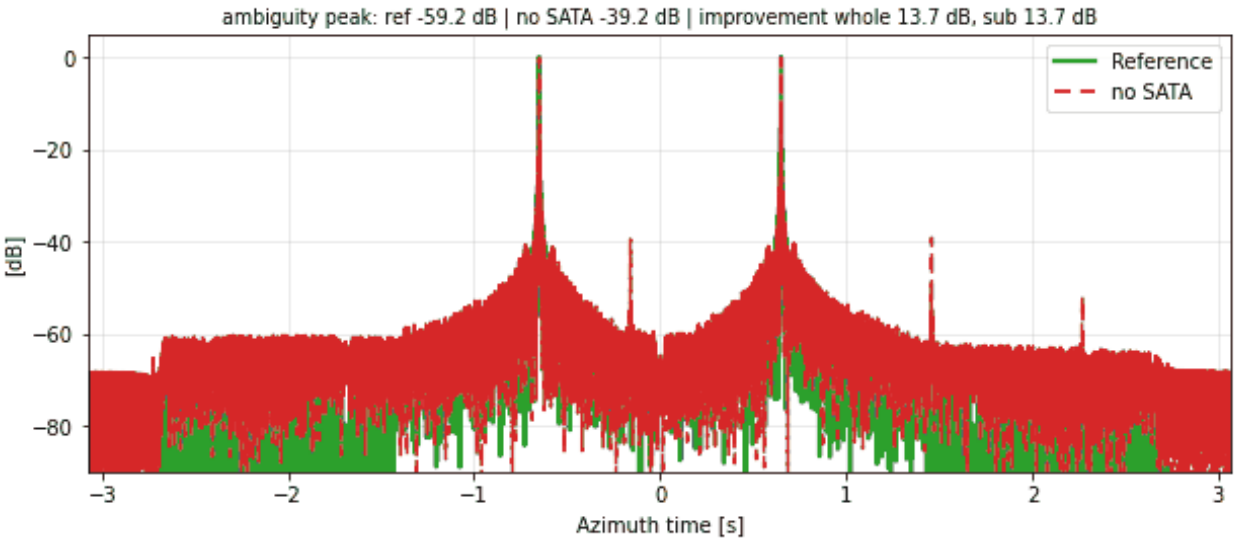



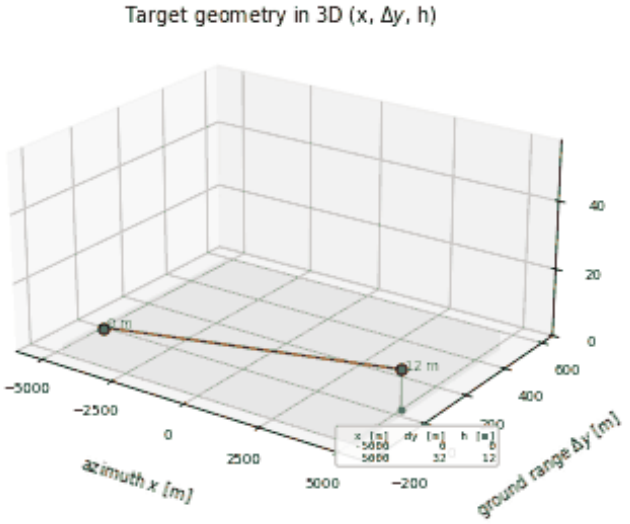



RA-LS-011 | SATA 1D | along-track ramp: N = 2, $\alpha = 30°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

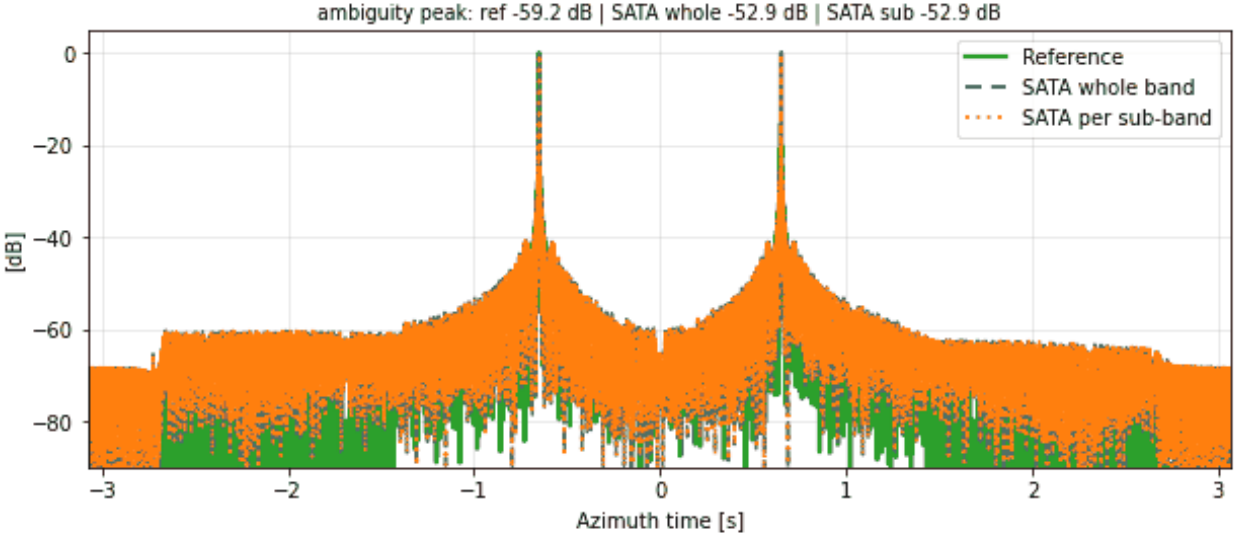

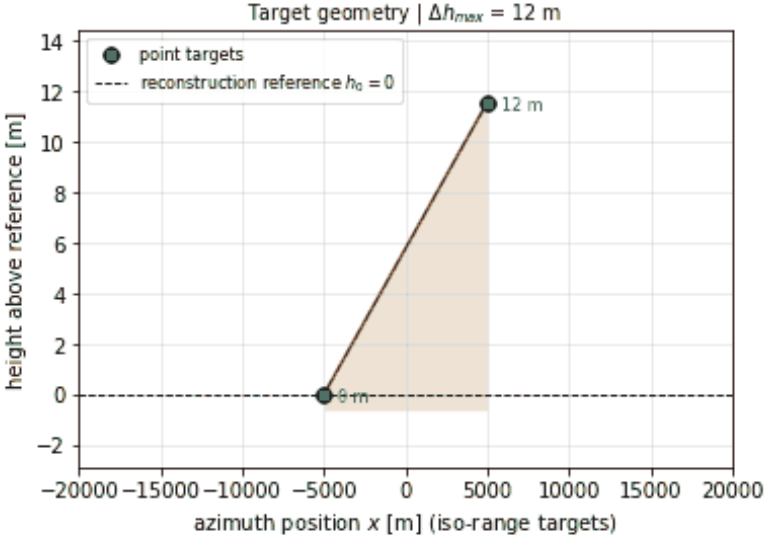



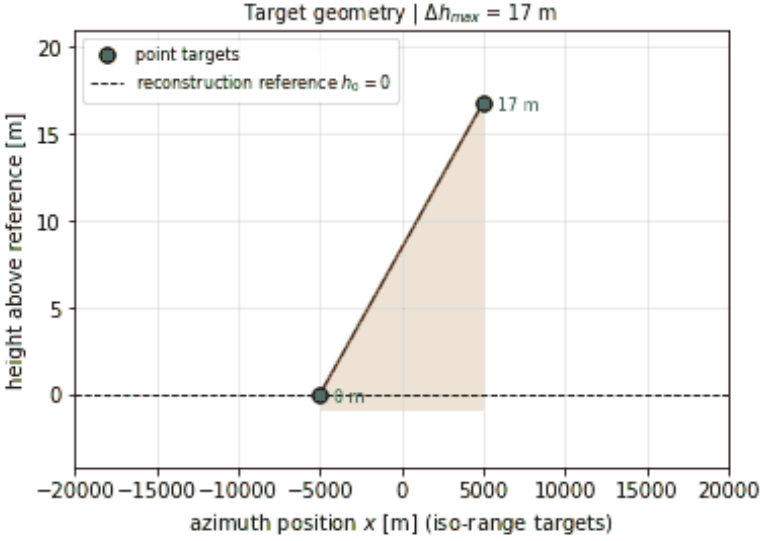



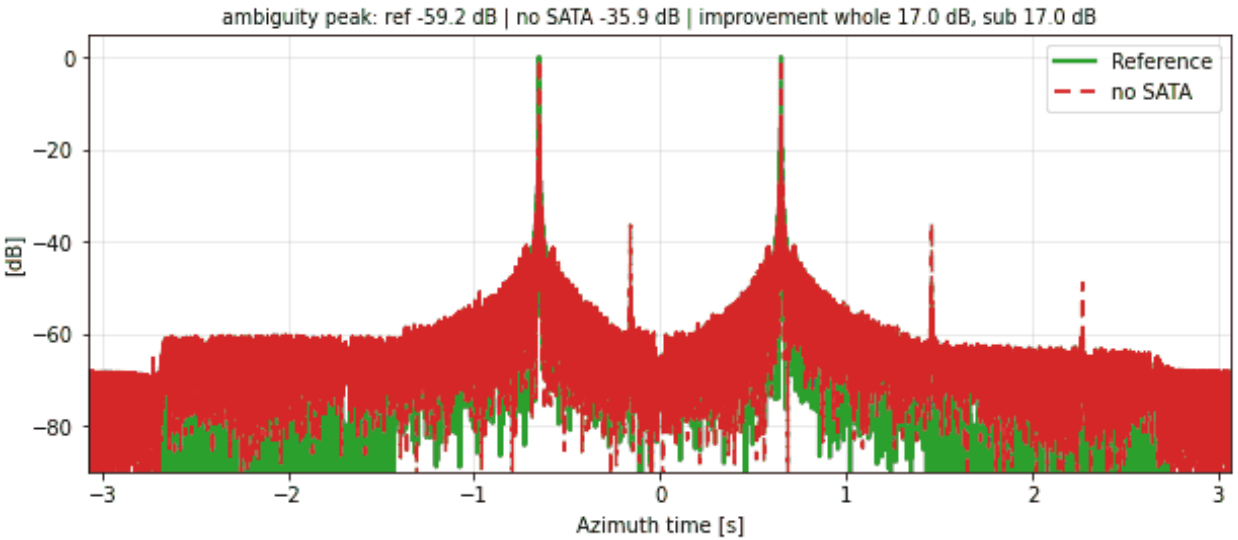



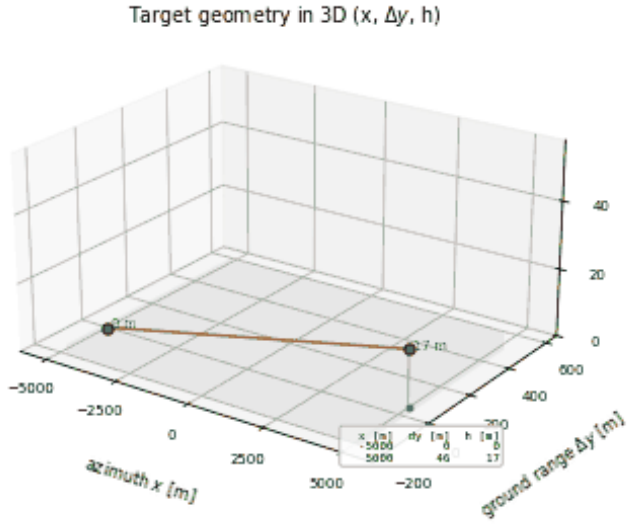
RA-LS-012 | SATA 1D | along-track ramp: N = 2, $\alpha = 40°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

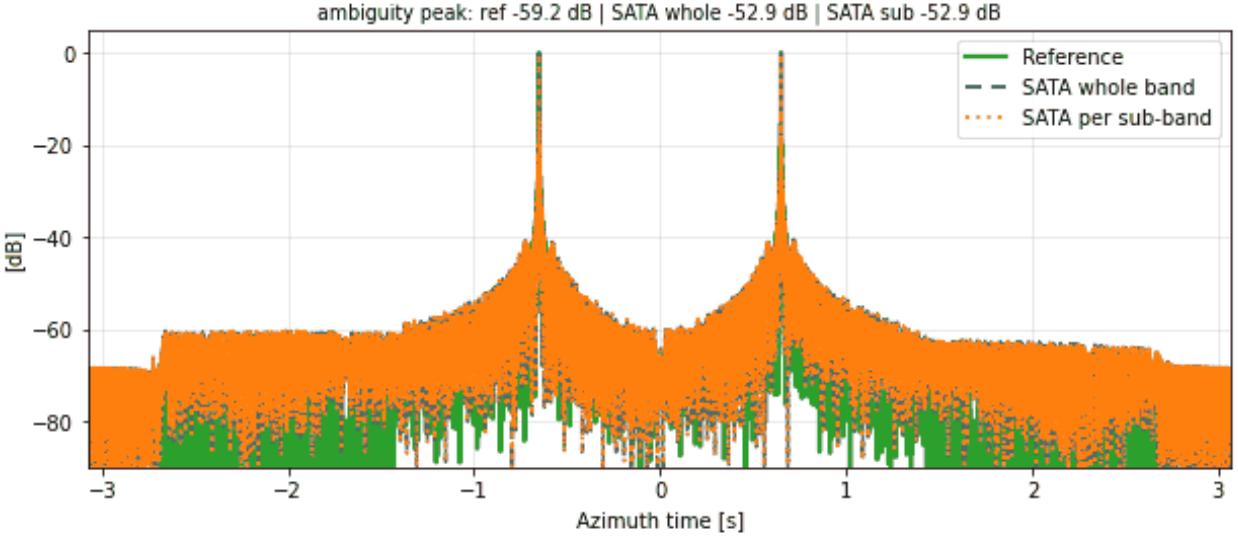





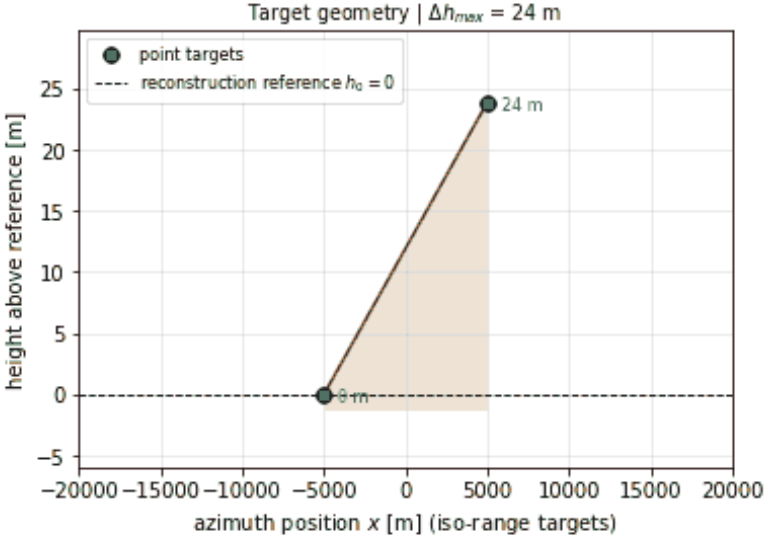



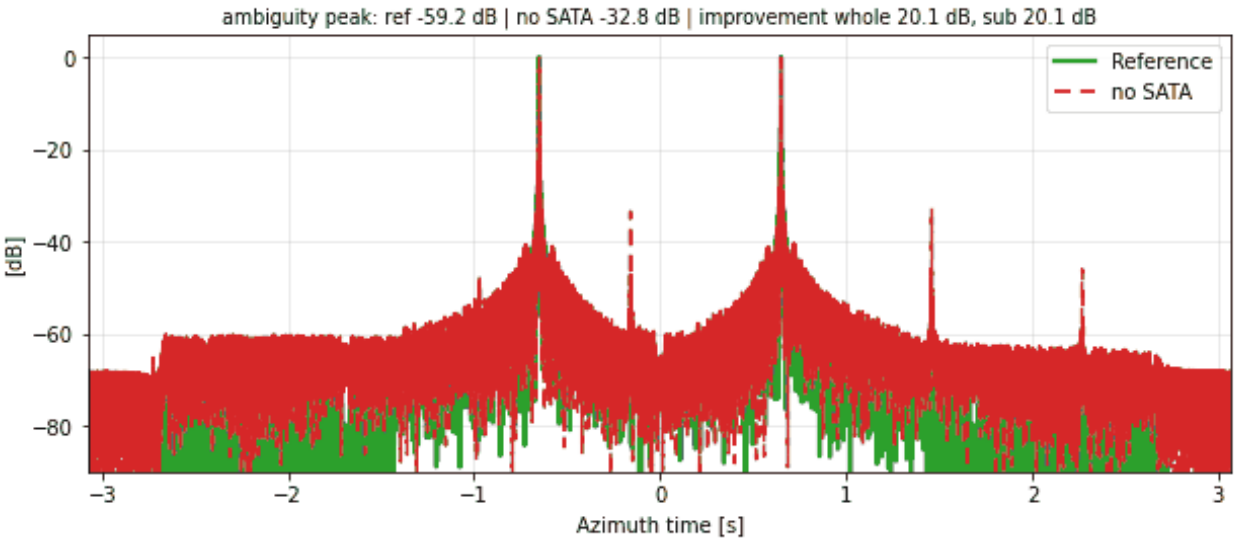



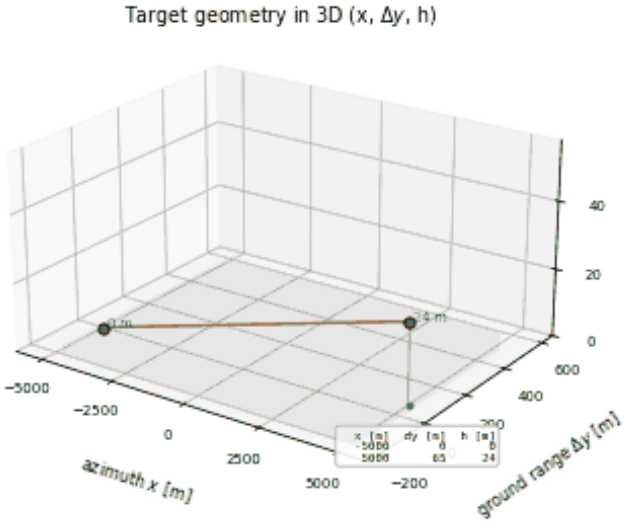
RA-LS-013 | SATA 1D | along-track ramp: N = 2, $\alpha = 50°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

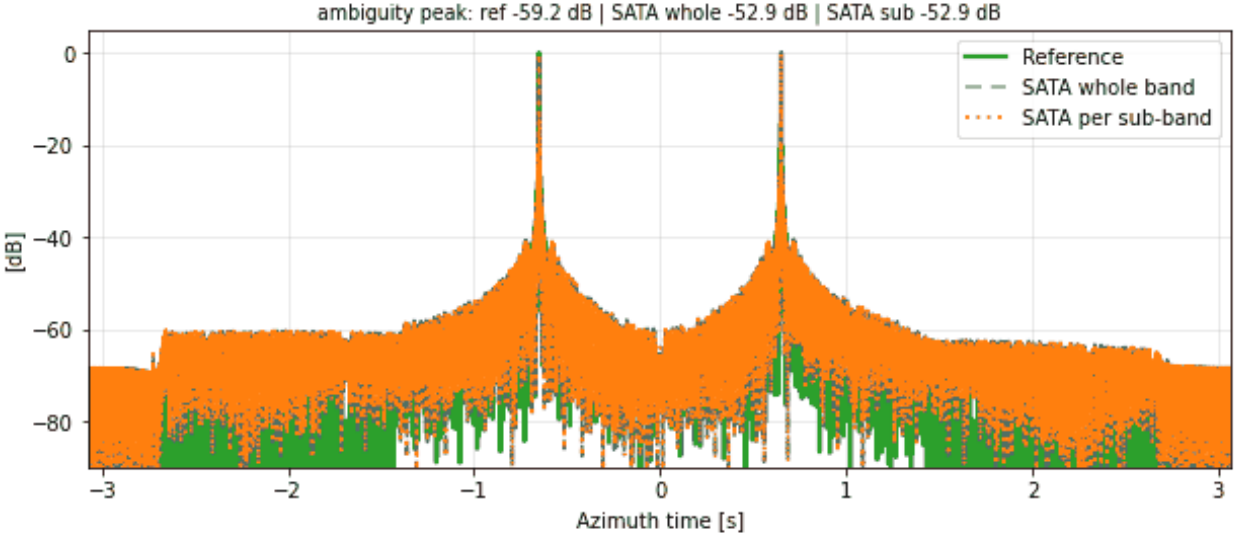





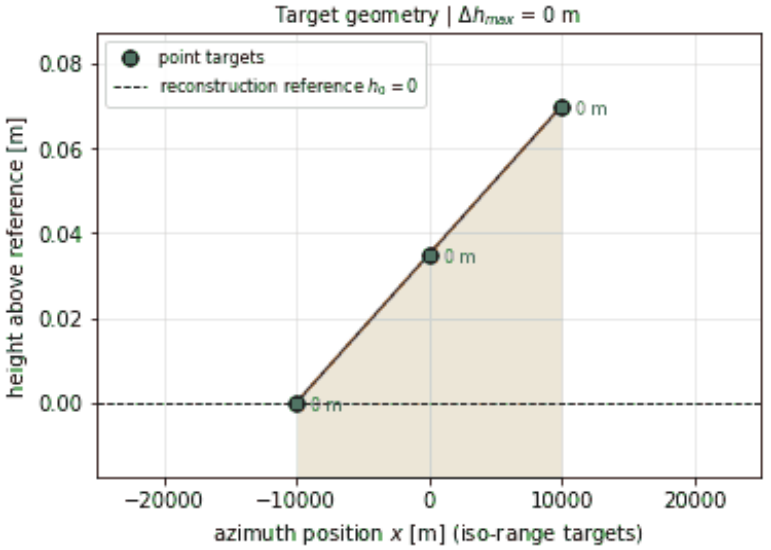



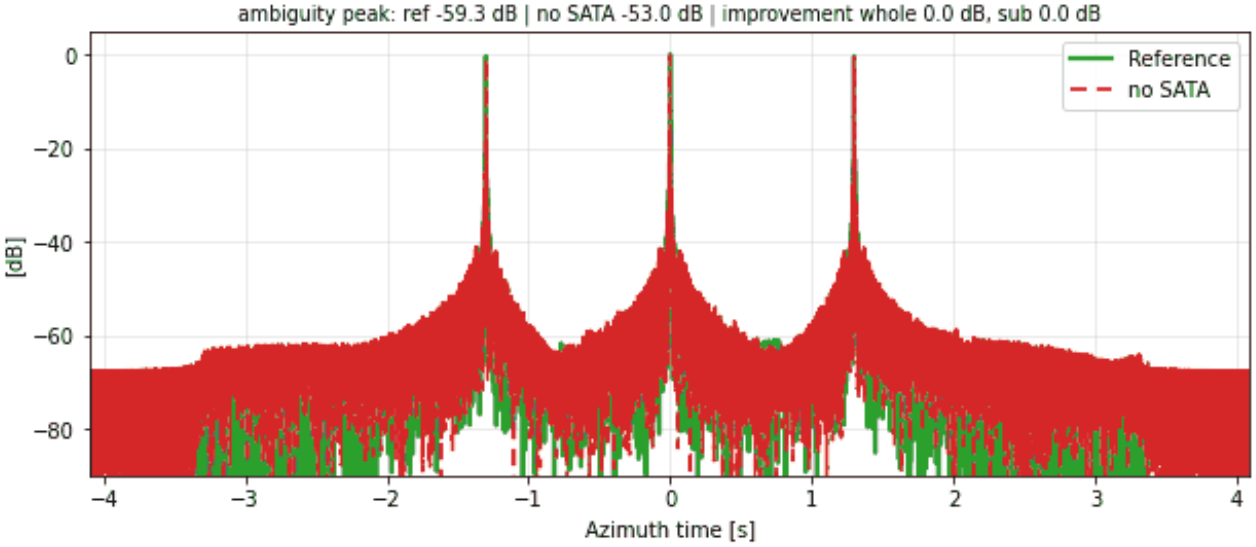



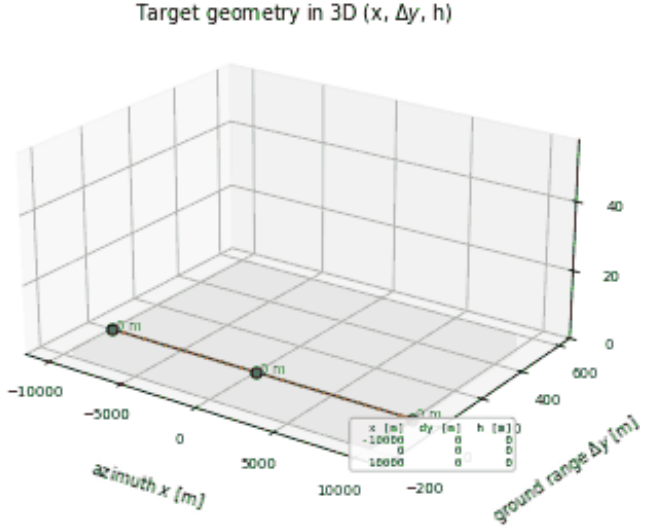
RA-LS-014 | SATA 1D | along-track ramp: N = 3, $\alpha = 0.1°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

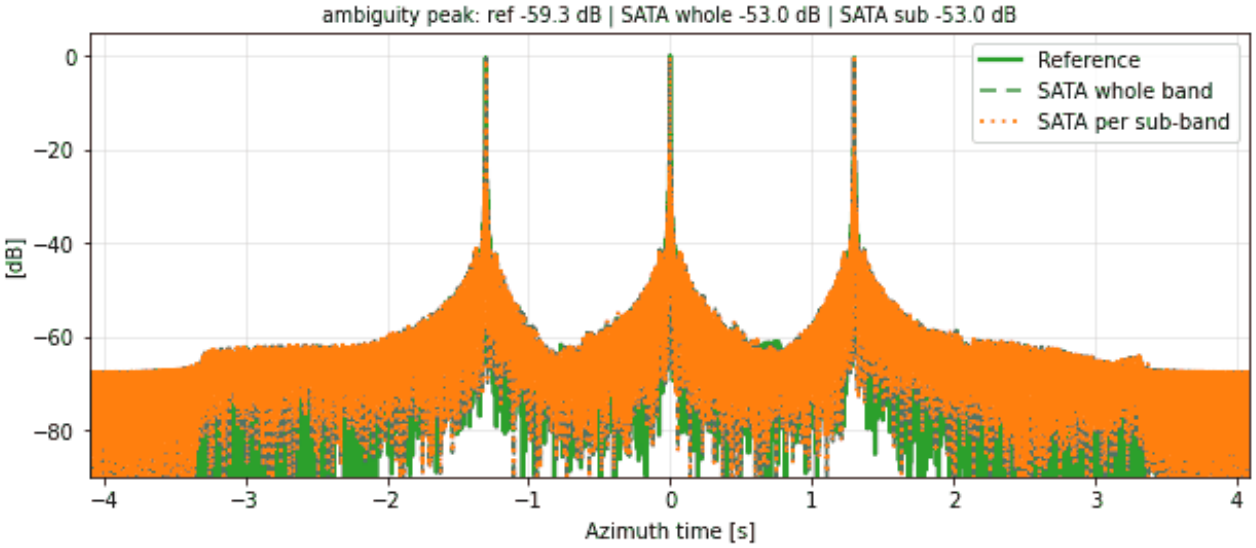






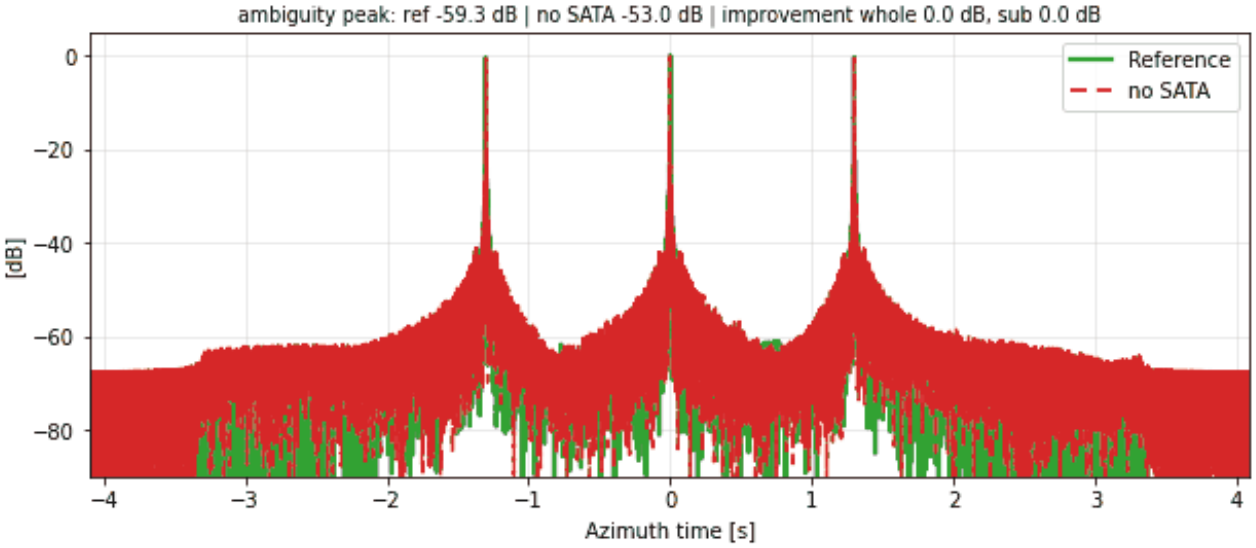



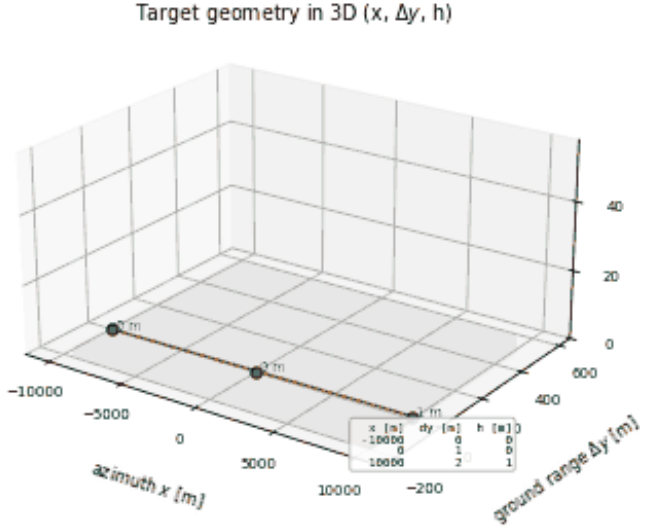



RA-LS-015 | SATA 1D | along-track ramp: N = 3, $\alpha = 1°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

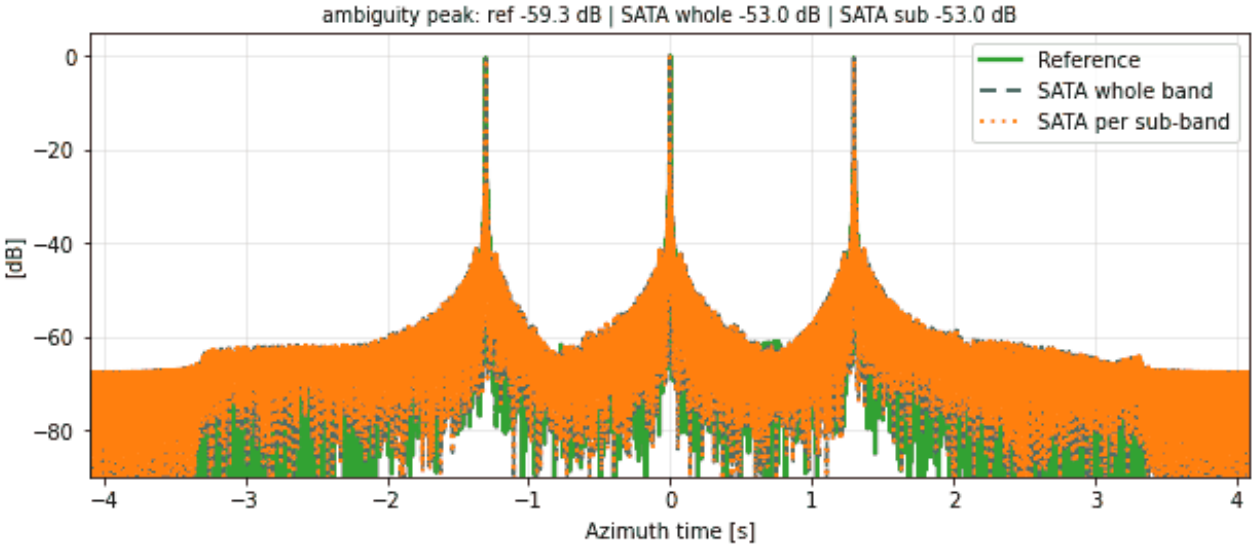

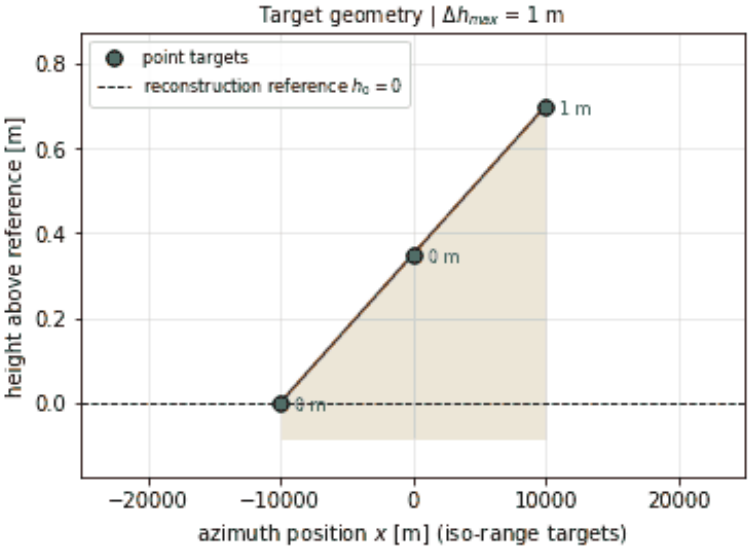



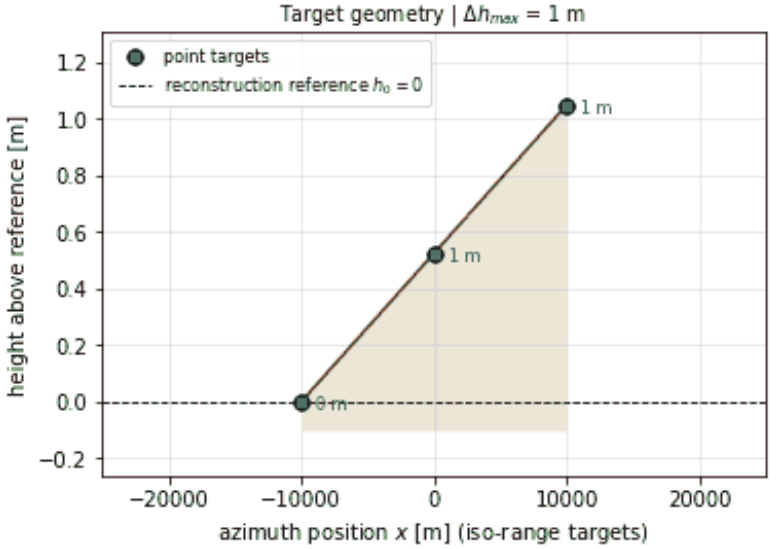



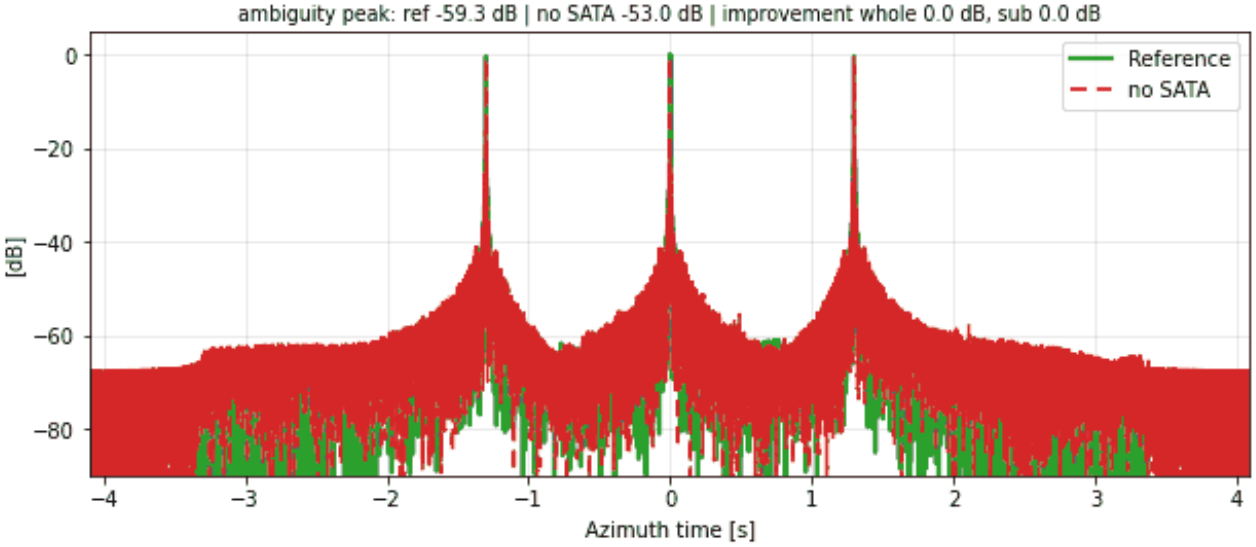



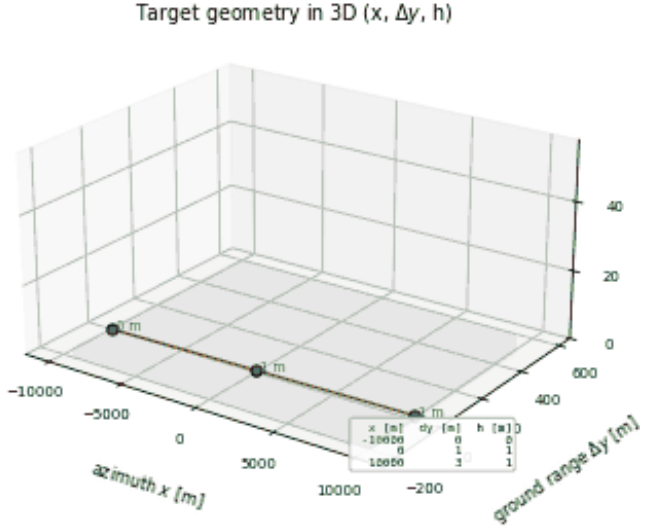
RA-LS-016 | SATA 1D | along-track ramp: N = 3, $\alpha$ = 1.5° (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

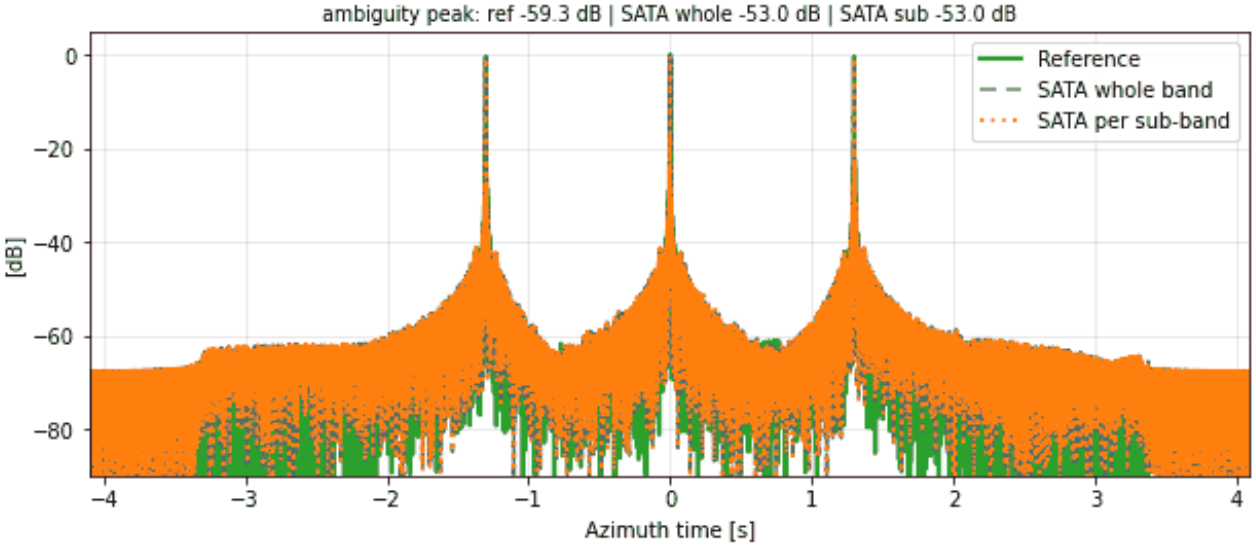






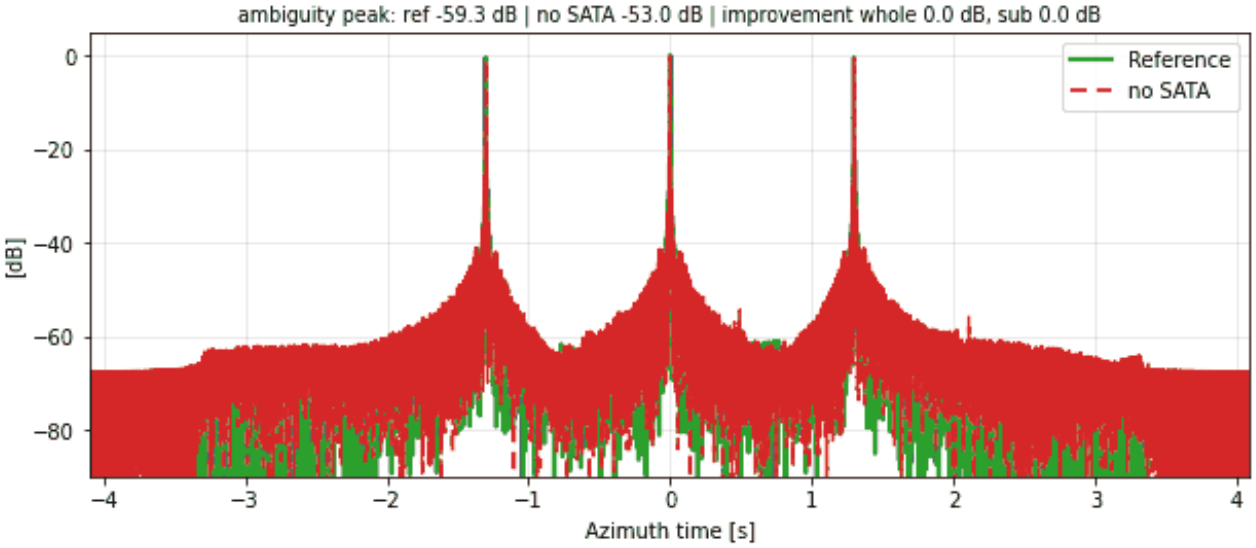



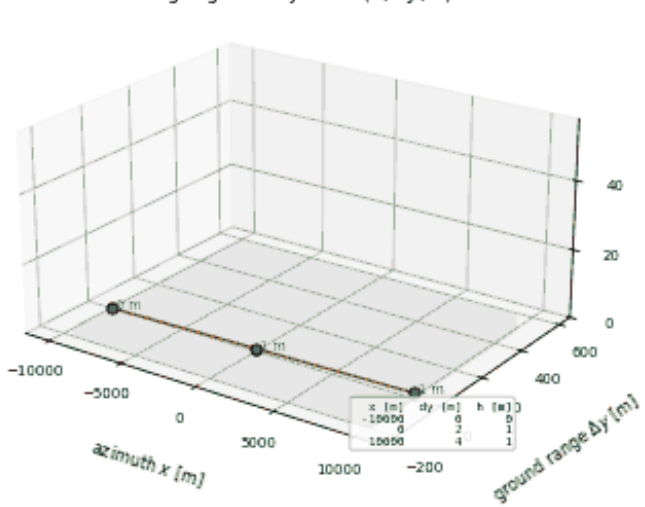



RA-LS-017 | SATA 1D | along-track ramp: N = 3, $\alpha = 2°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

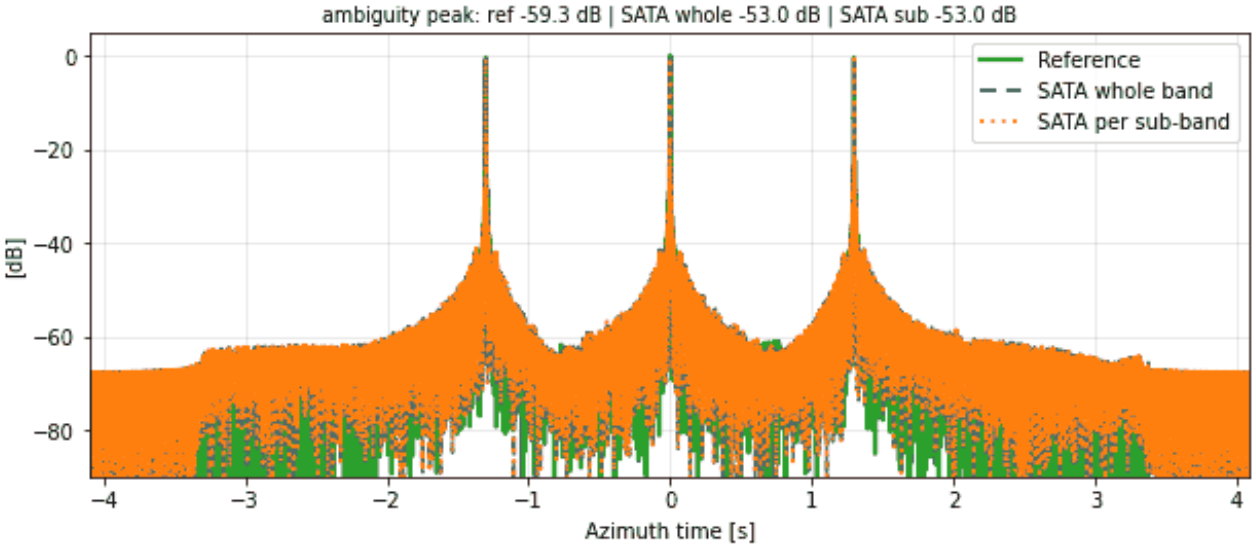


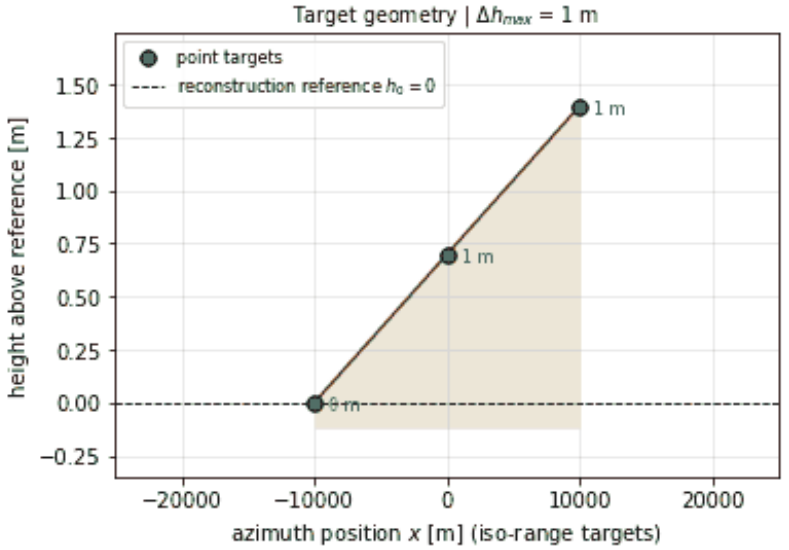



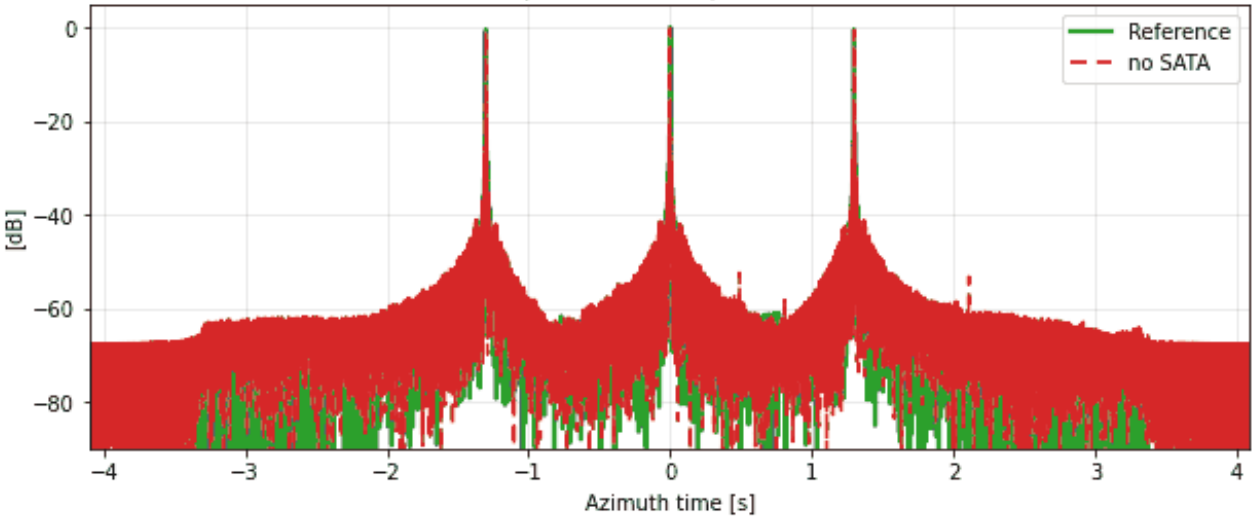



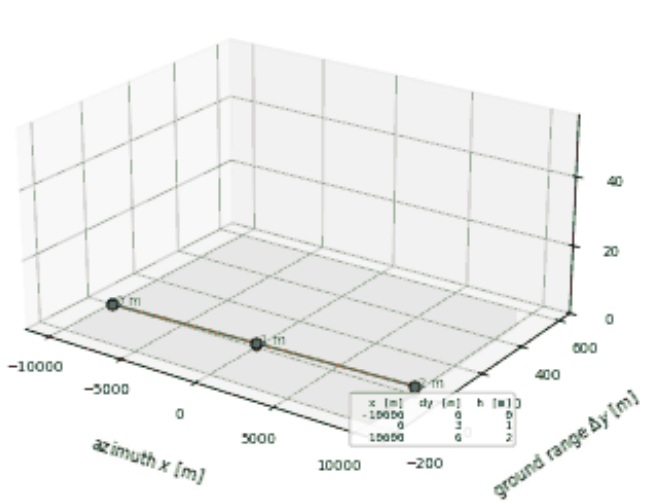



RA-LS-018 | SATA 1D | along-track ramp: N = 3, $\alpha = 3°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

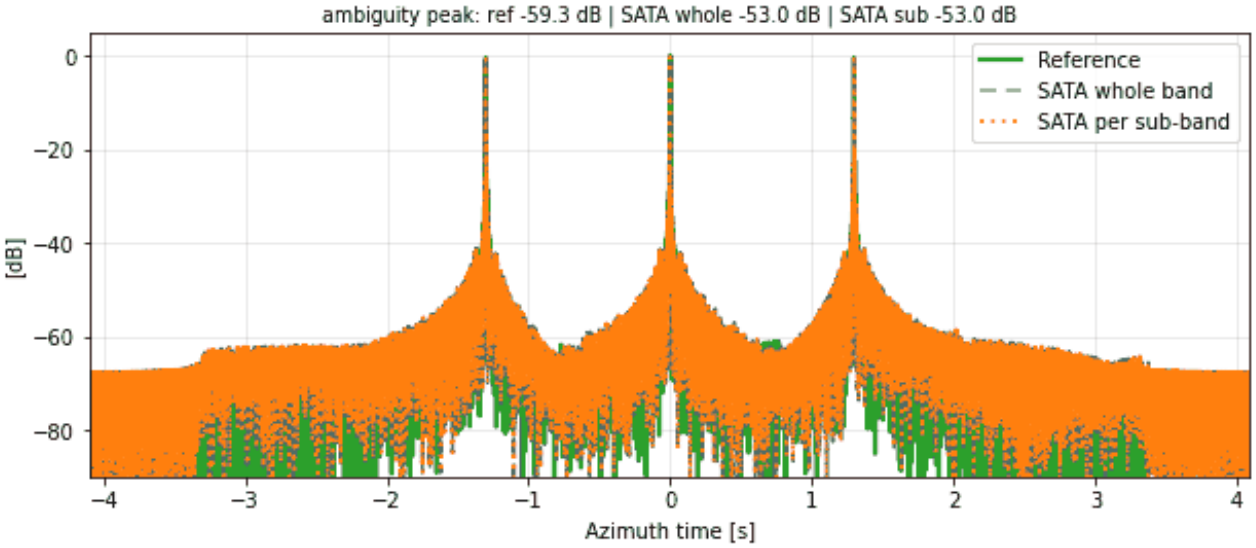


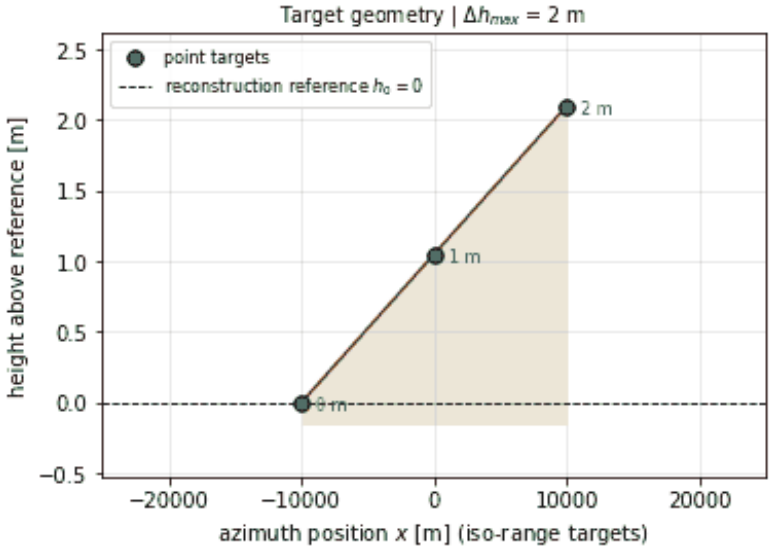



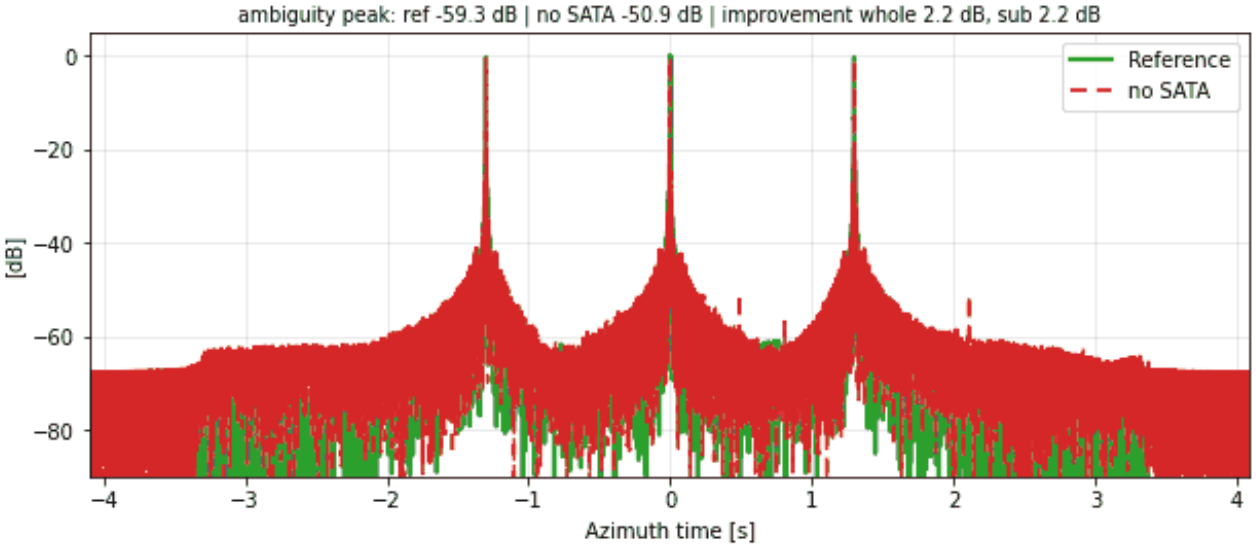



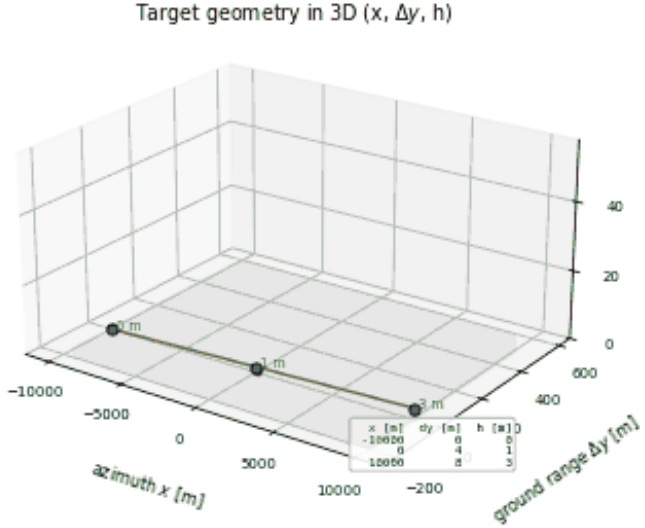



RA-LS-019 | SATA 1D | along-track ramp: N = 3, $\alpha = 4°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

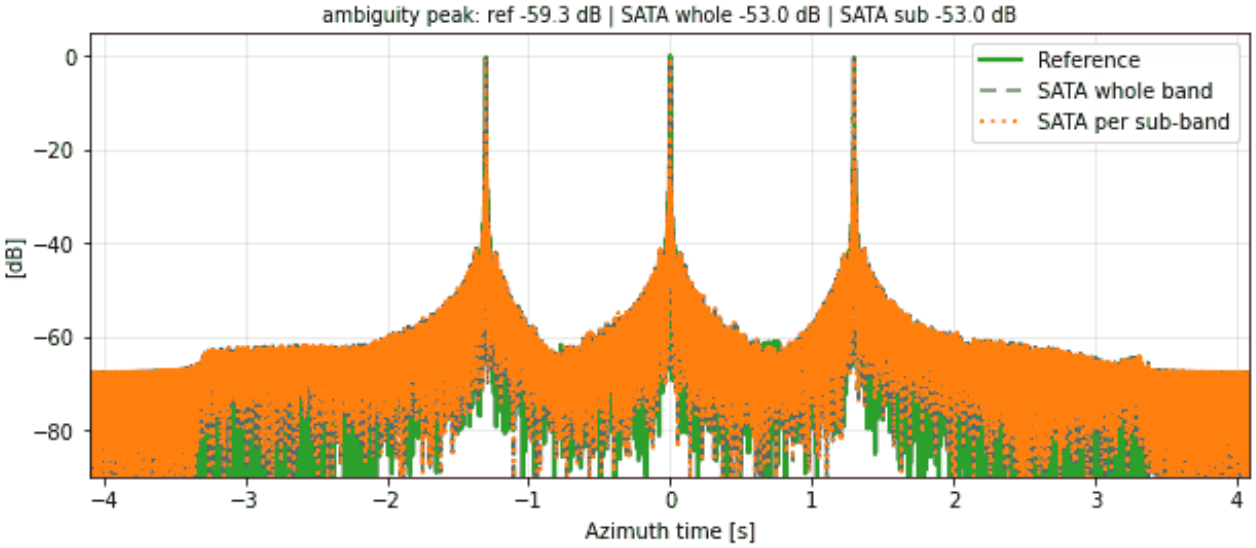

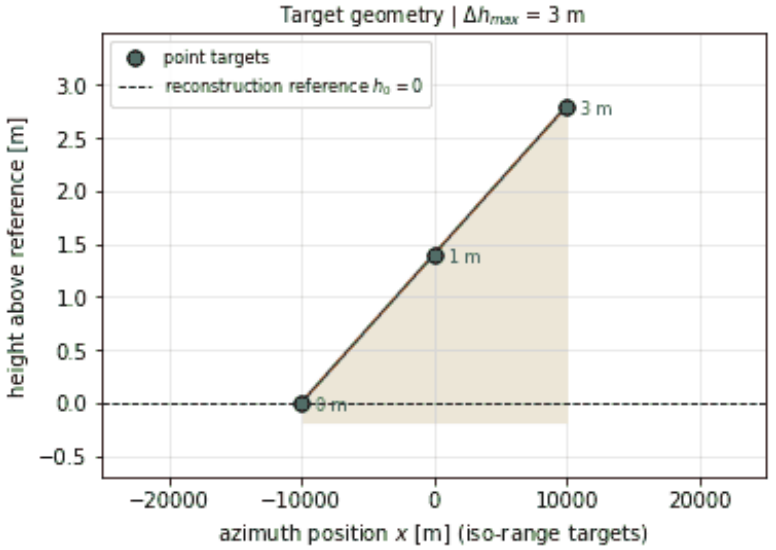



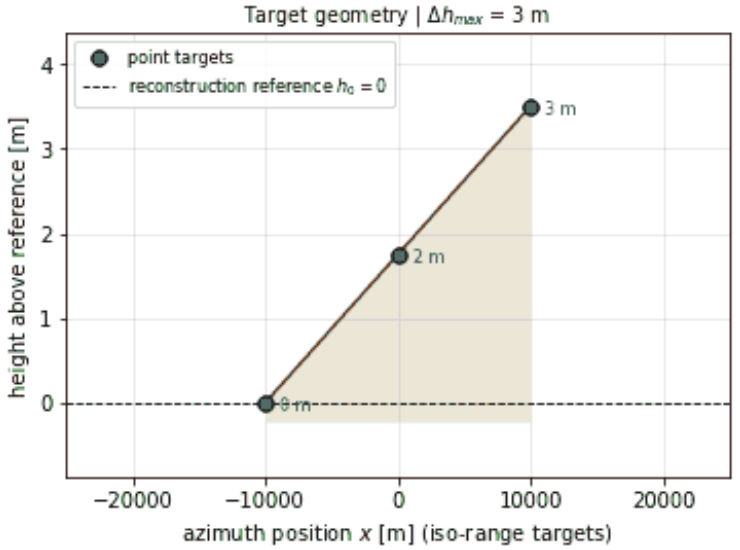



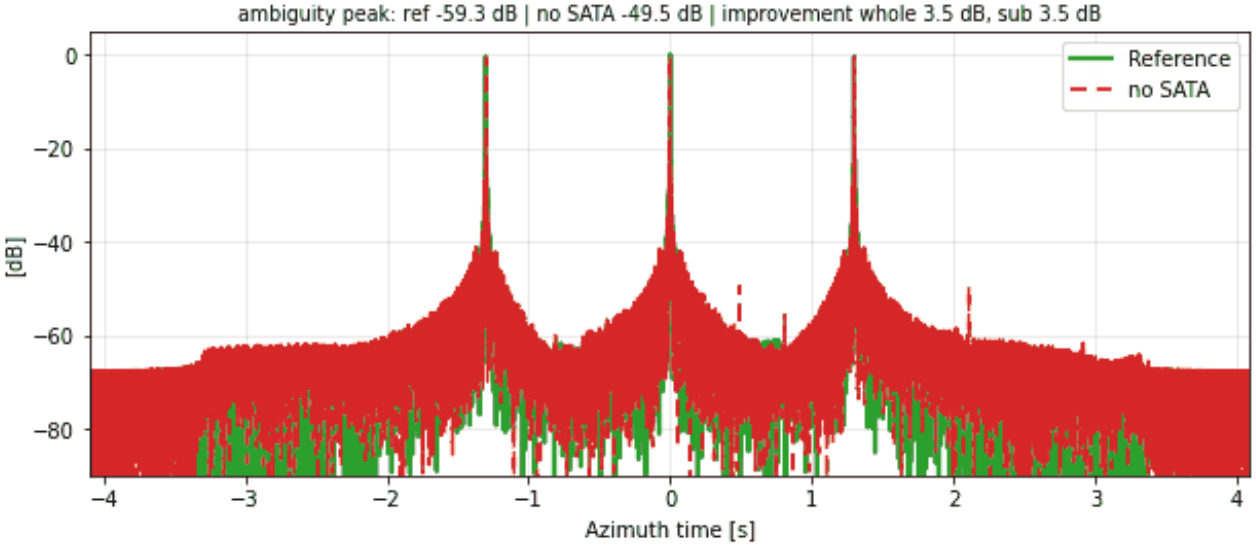



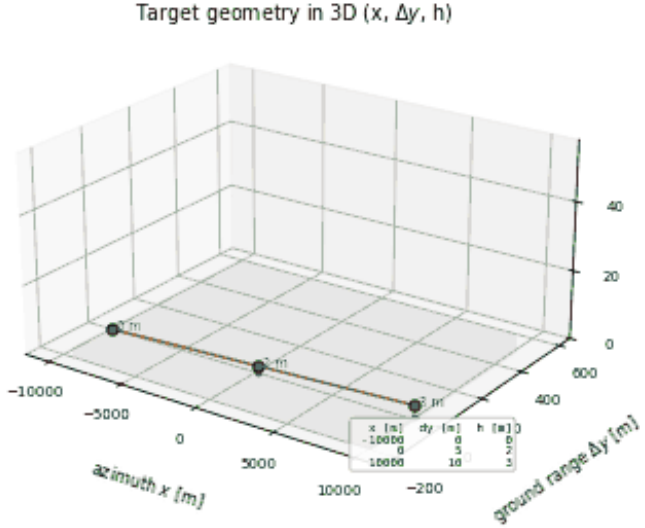
RA-LS-020 | SATA 1D | along-track ramp: N = 3, $\alpha = 5°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

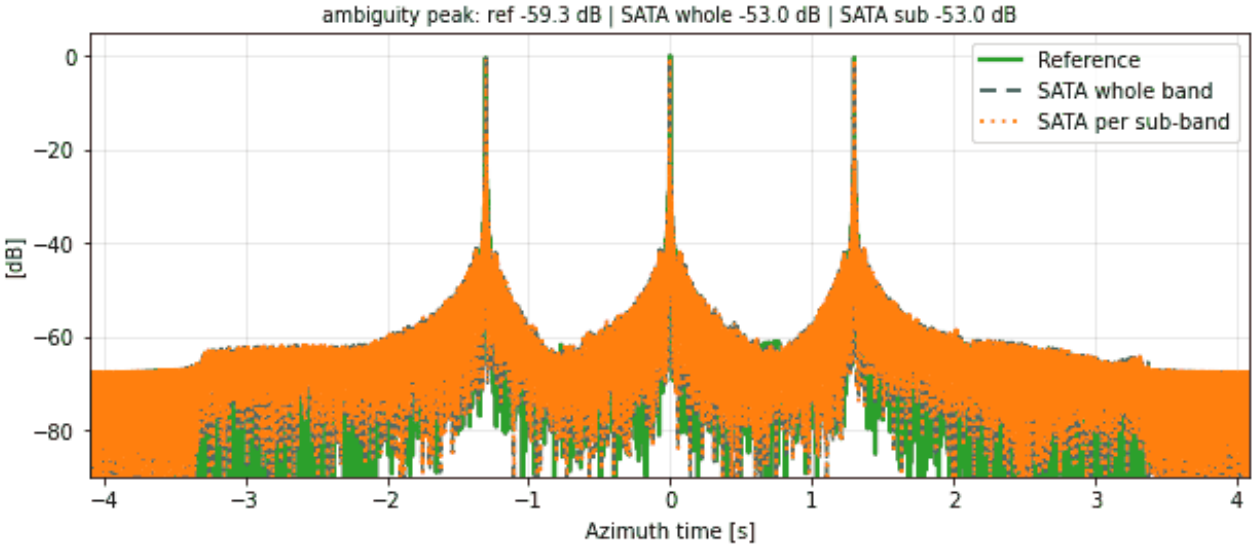






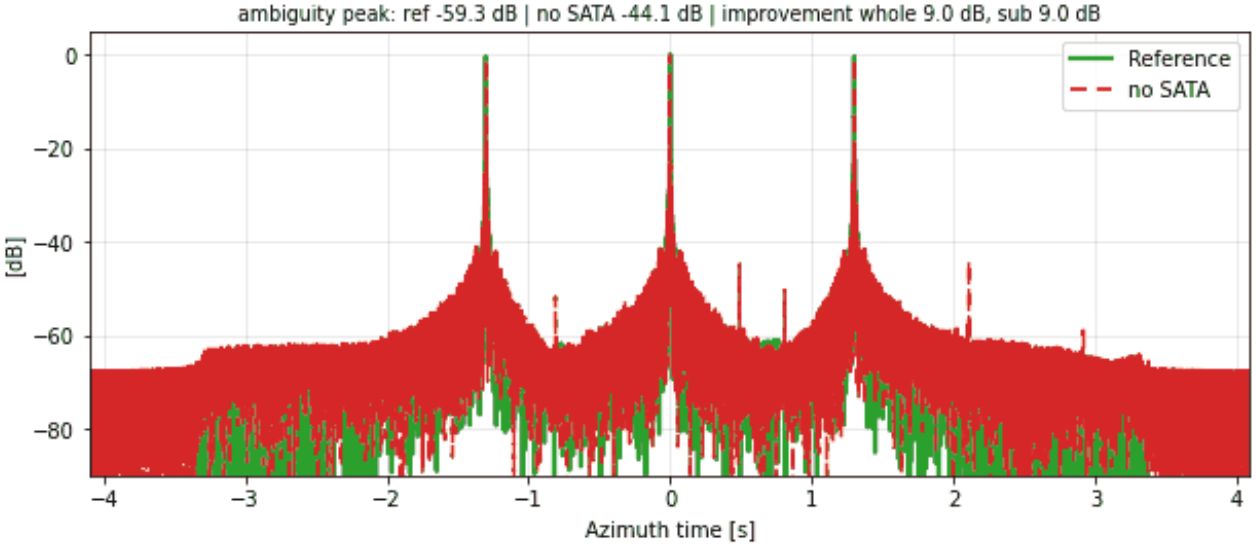



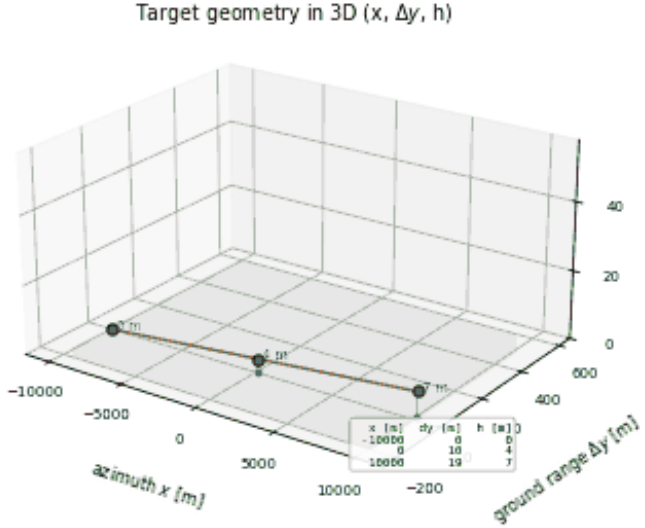



RA-LS-021 | SATA 1D | along-track ramp: N = 3, $\alpha = 10^\circ$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

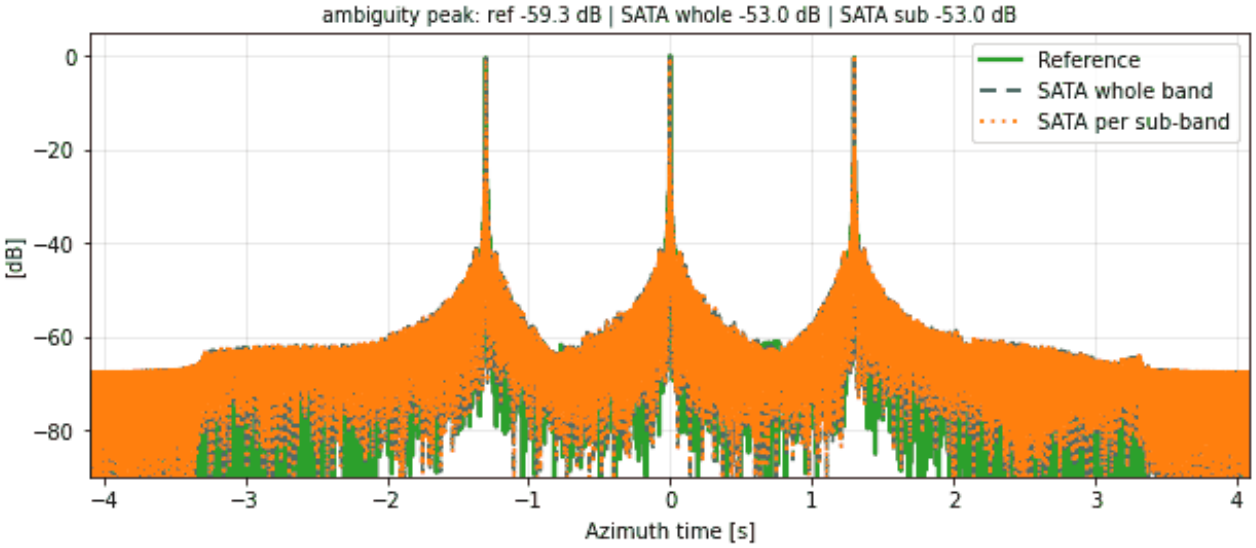

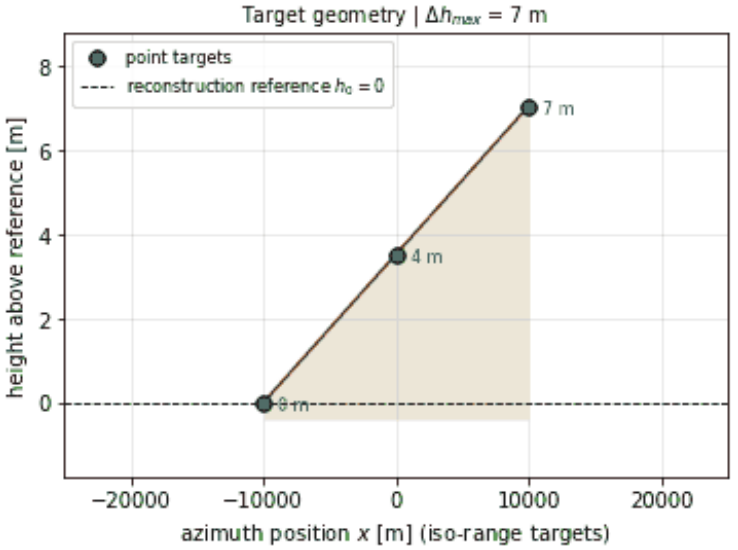



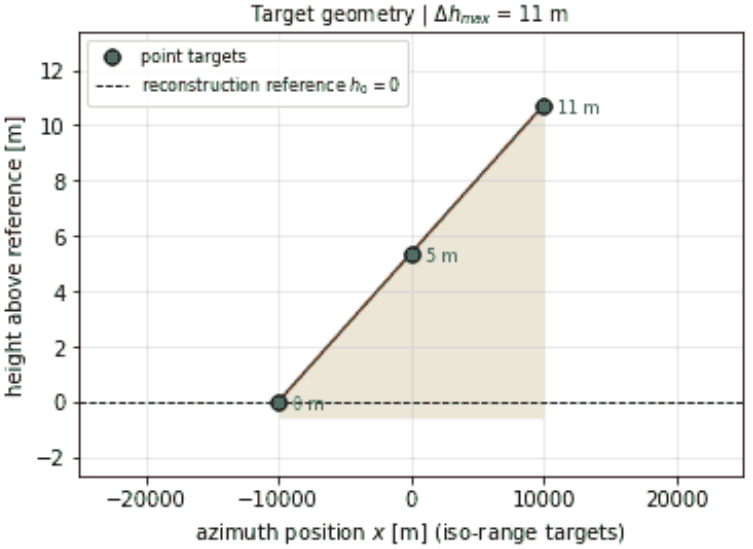



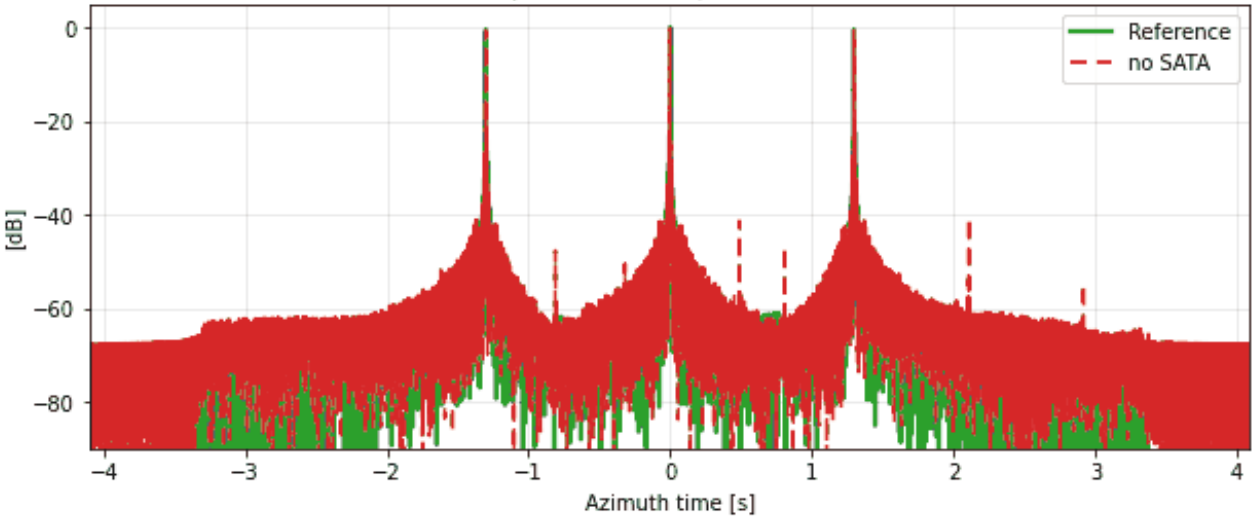



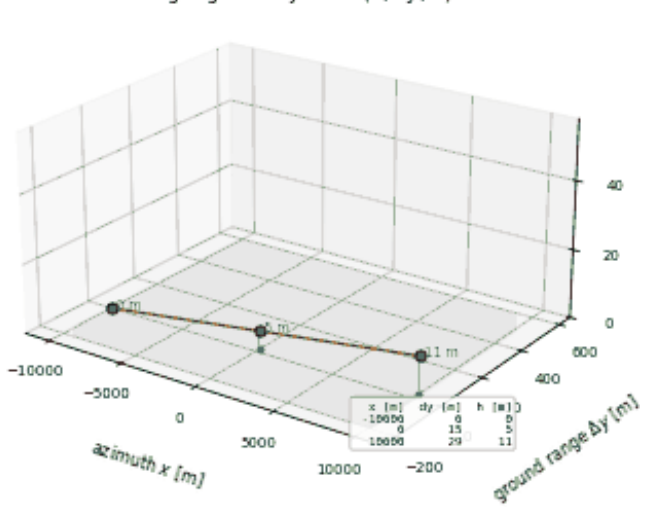

365

RA-LS-022 | SATA 1D | along-track ramp: N = 3, $\alpha = 15^\circ$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

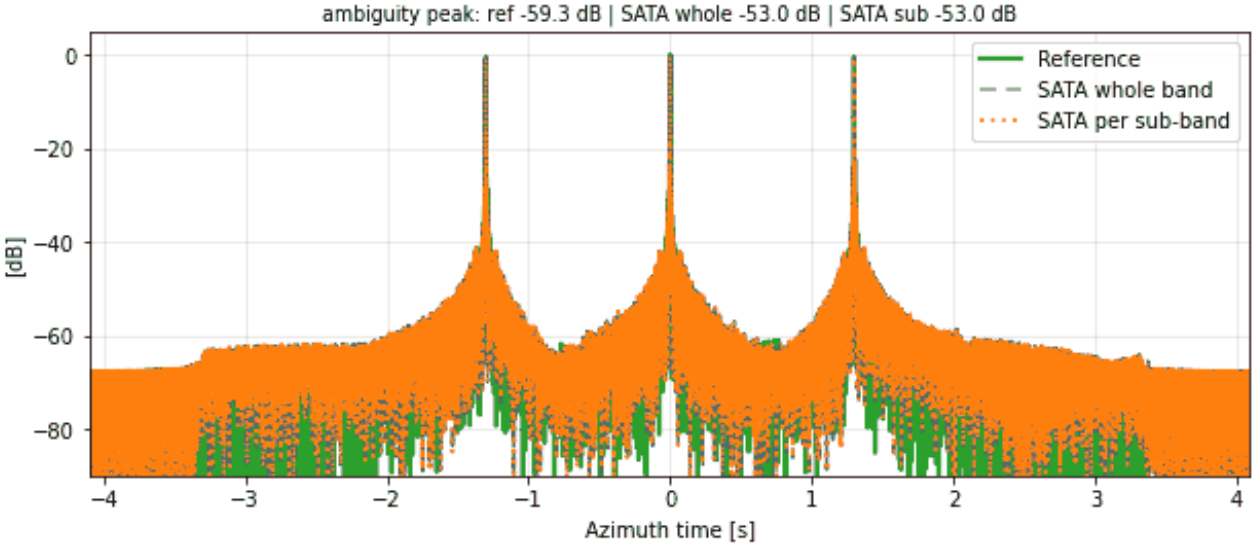





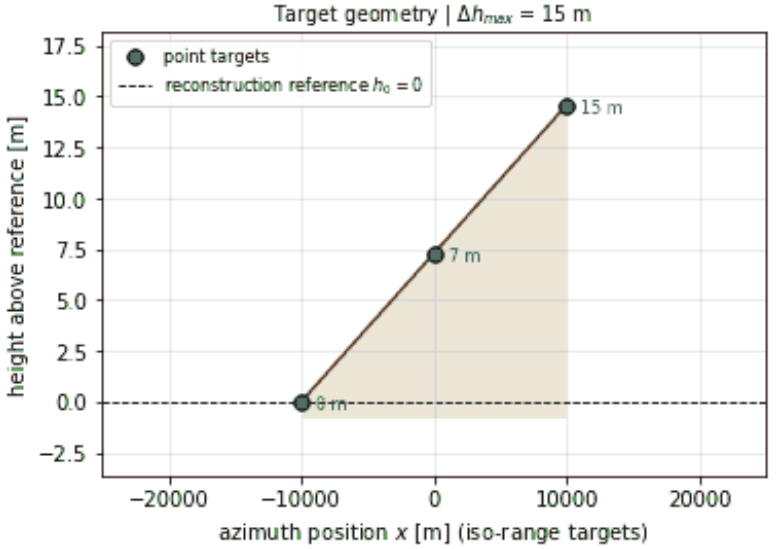



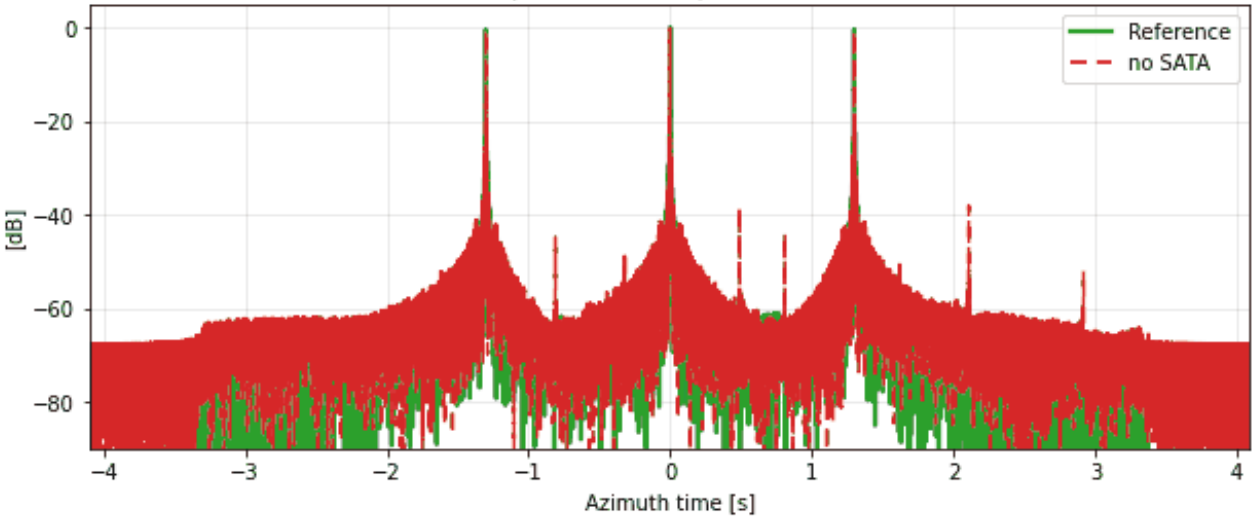



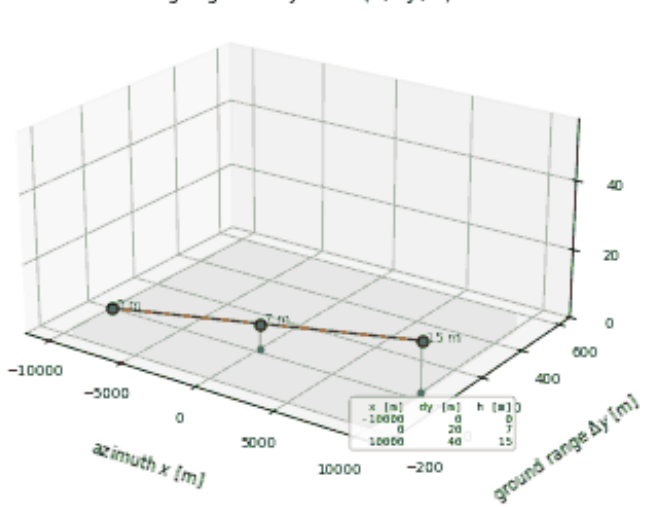
RA-LS-023 | SATA 1D | along-track ramp: N = 3, $\alpha = 20°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

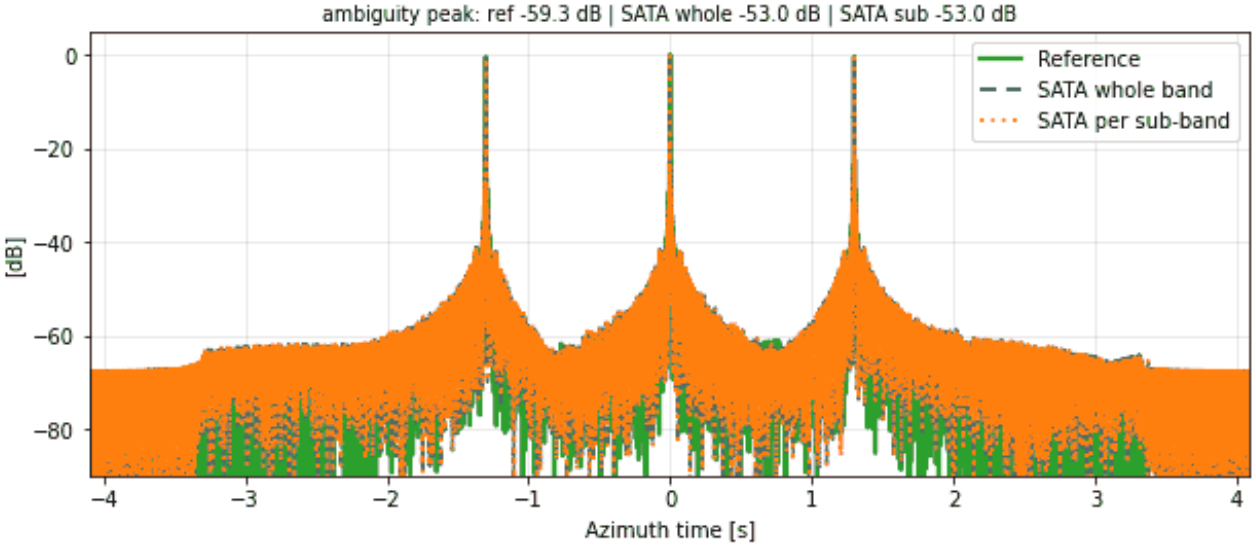





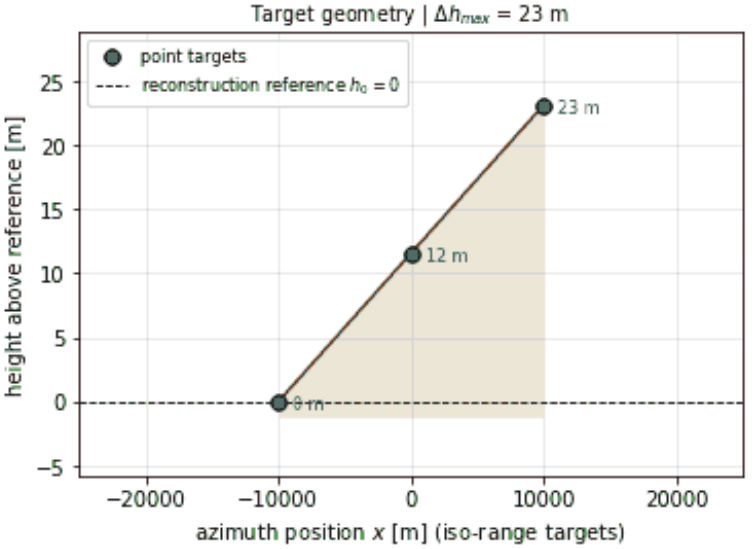



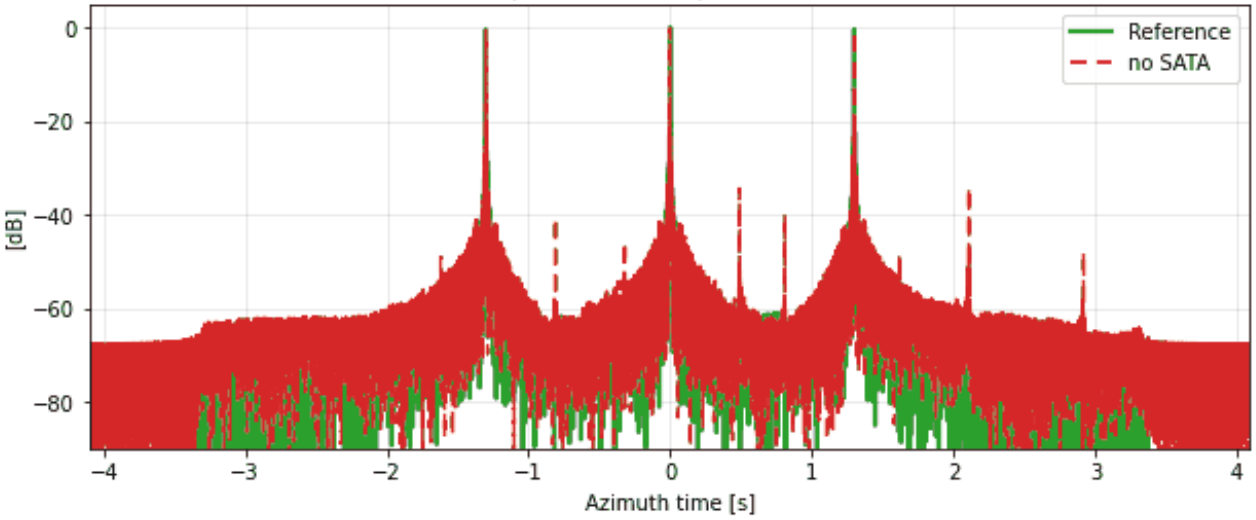



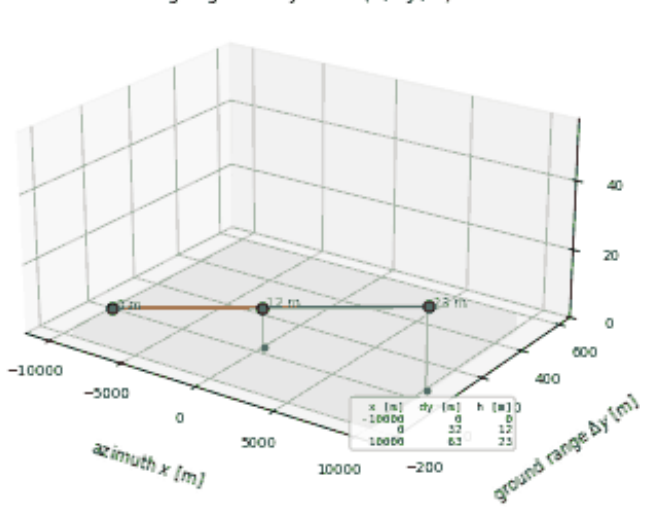
RA-LS-024 | SATA 1D | along-track ramp: N = 3, $\alpha = 30°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

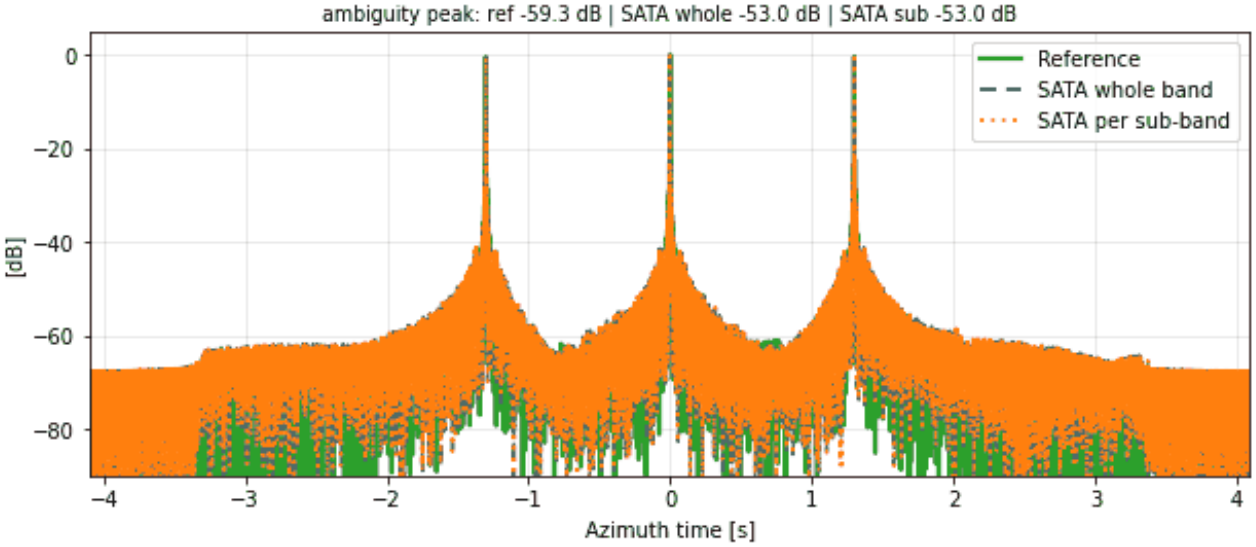





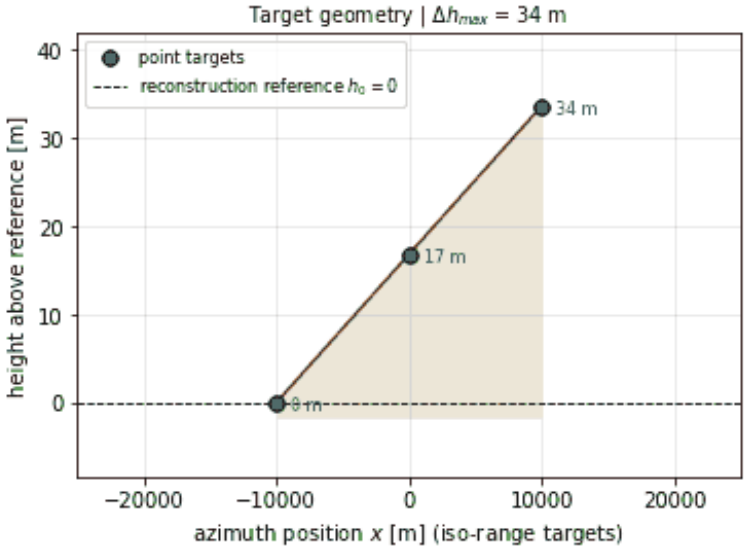



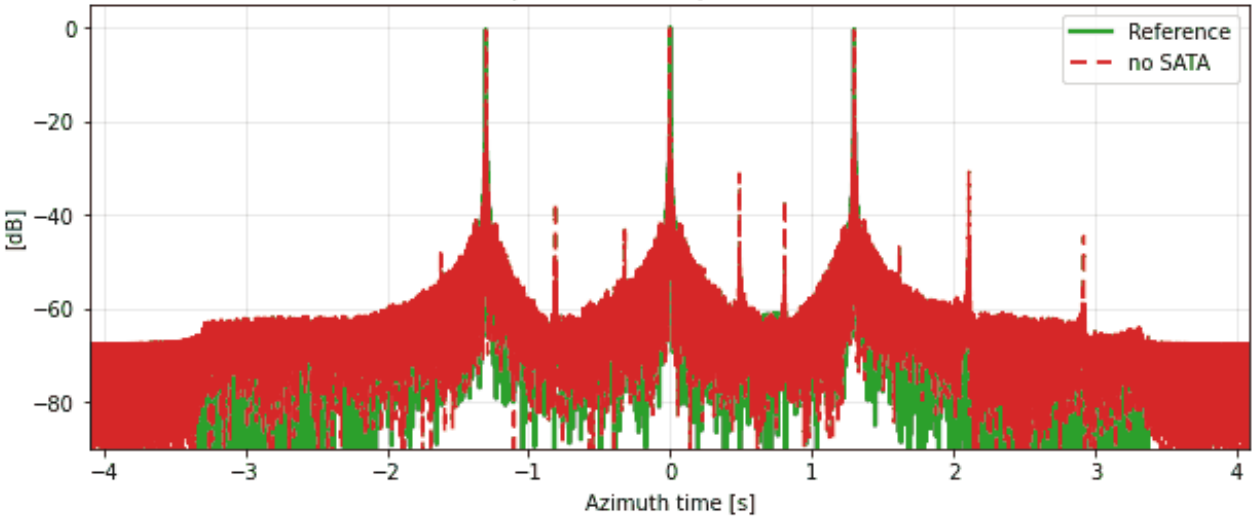



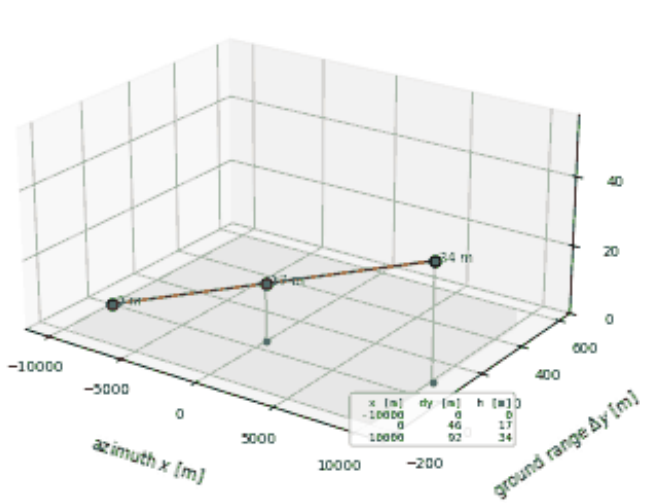
RA-LS-025 | SATA 1D | along-track ramp: N = 3, $\alpha = 40°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

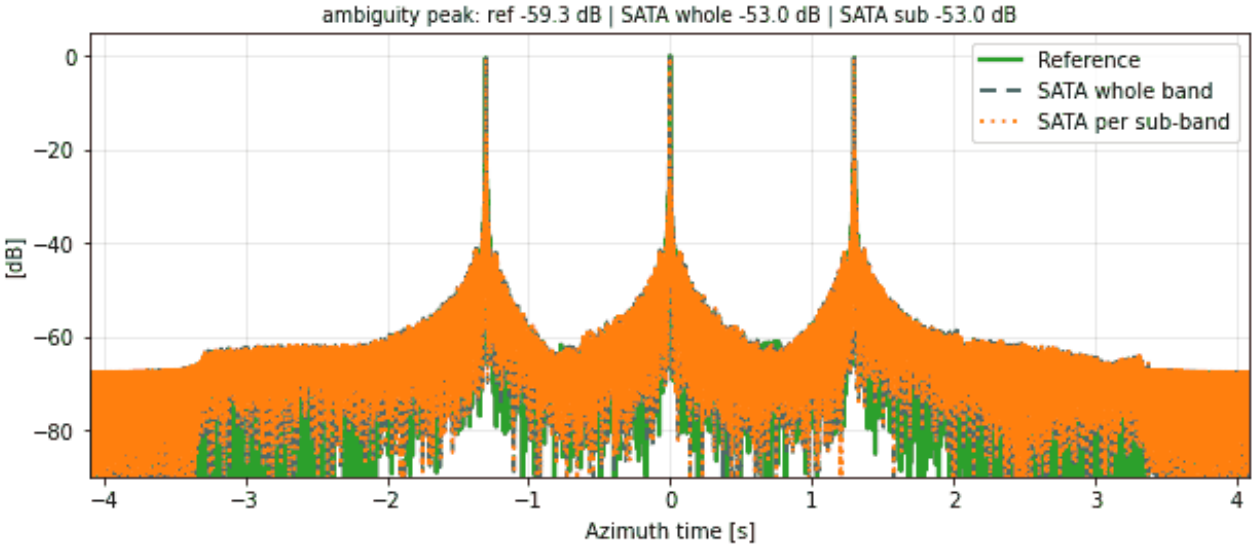





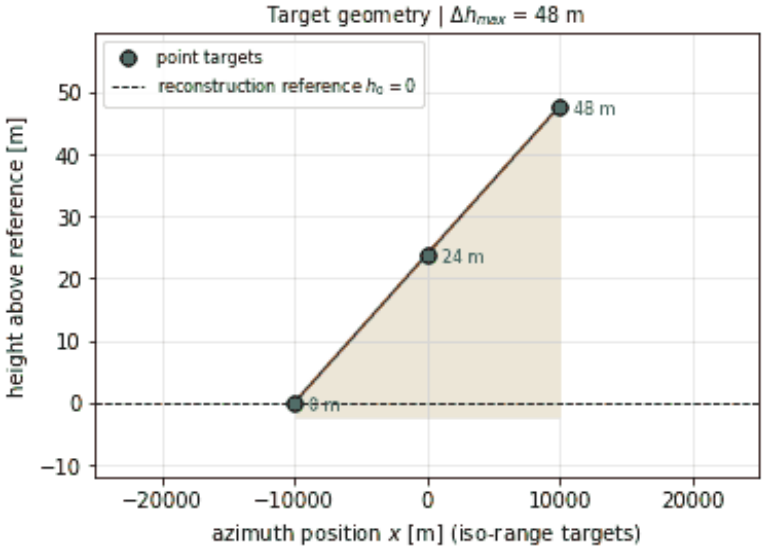



RA-LS-026 | SATA 1D | along-track ramp: N = 3, $\alpha = 50°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights


$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



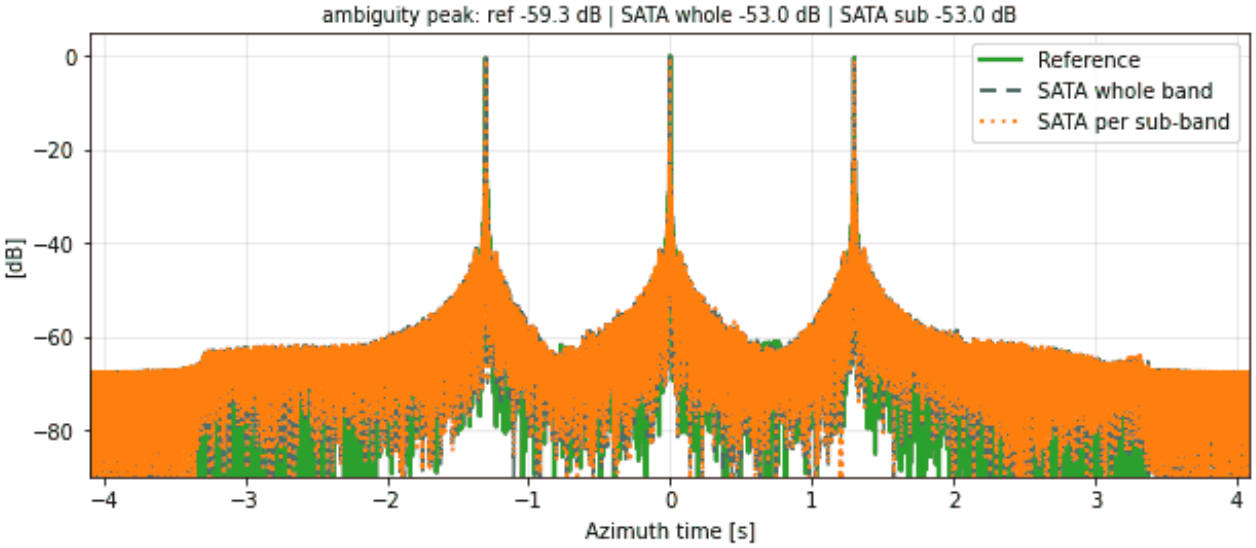





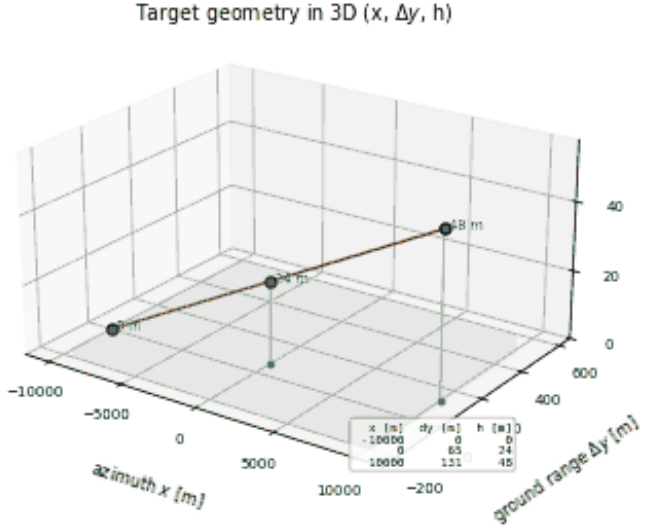




400

RA-LS-027 | SATA 1D | along-track ramp: N = 5, $\alpha = 0.1°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

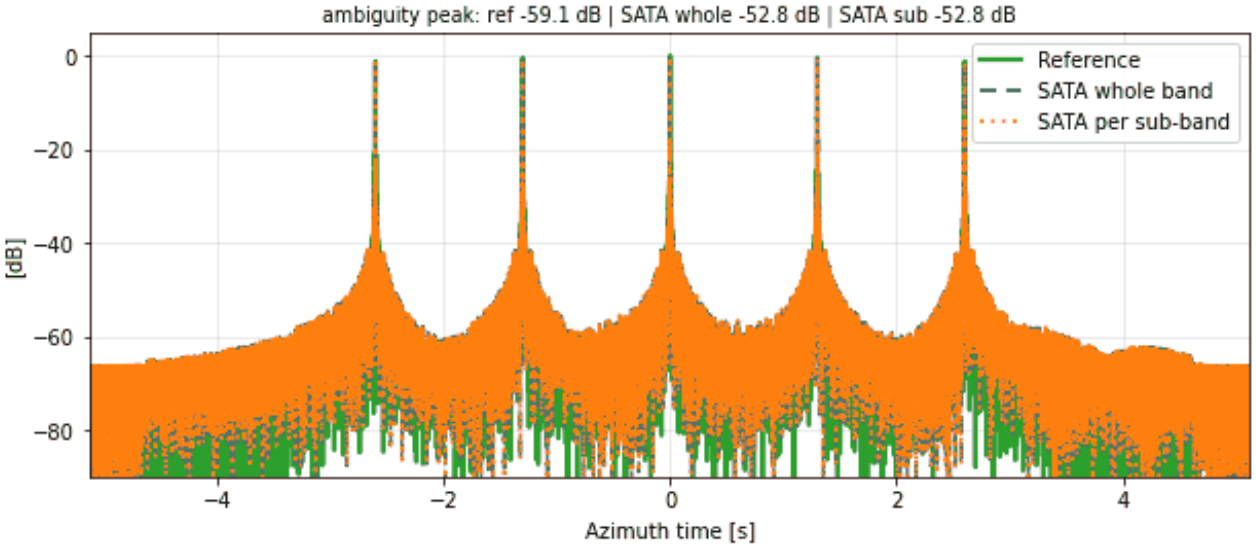

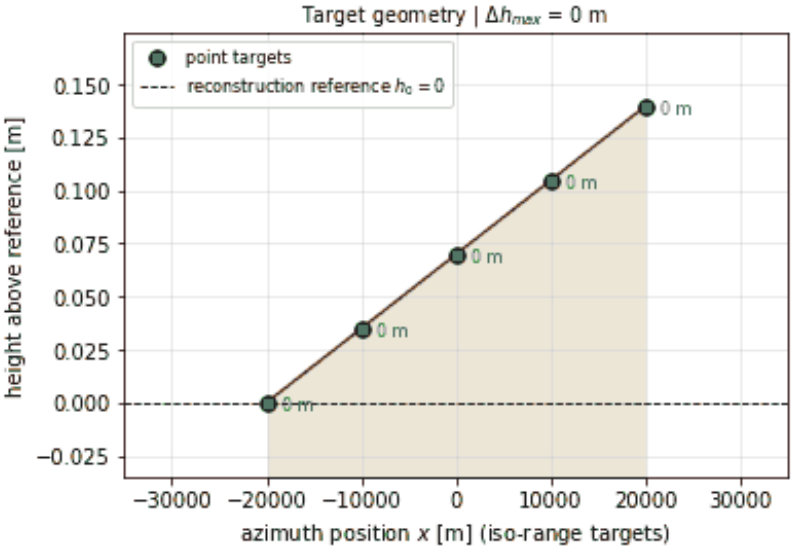


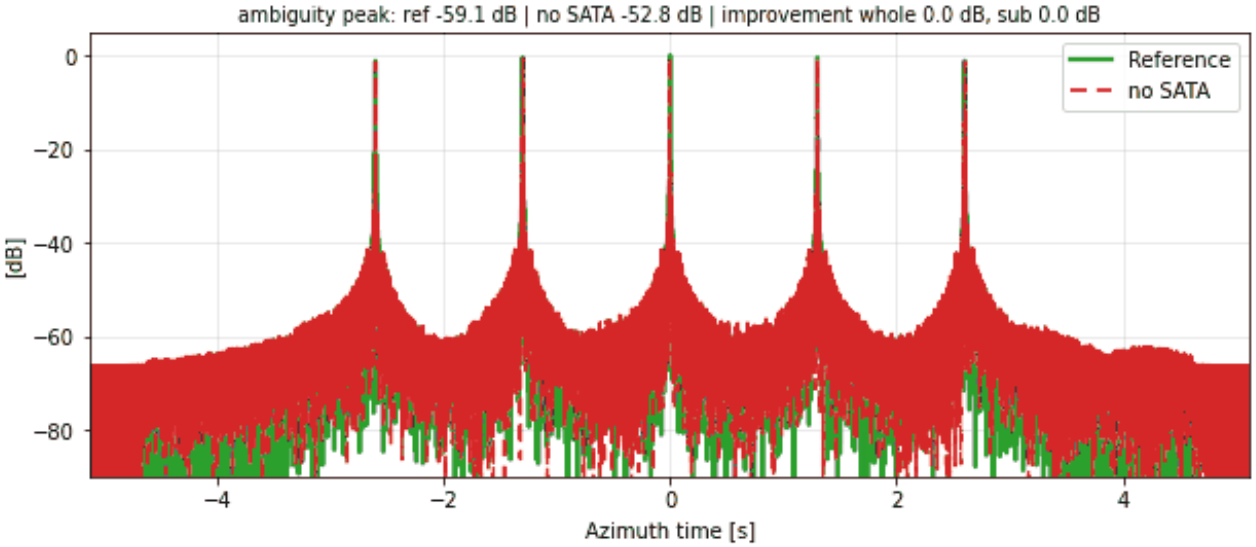
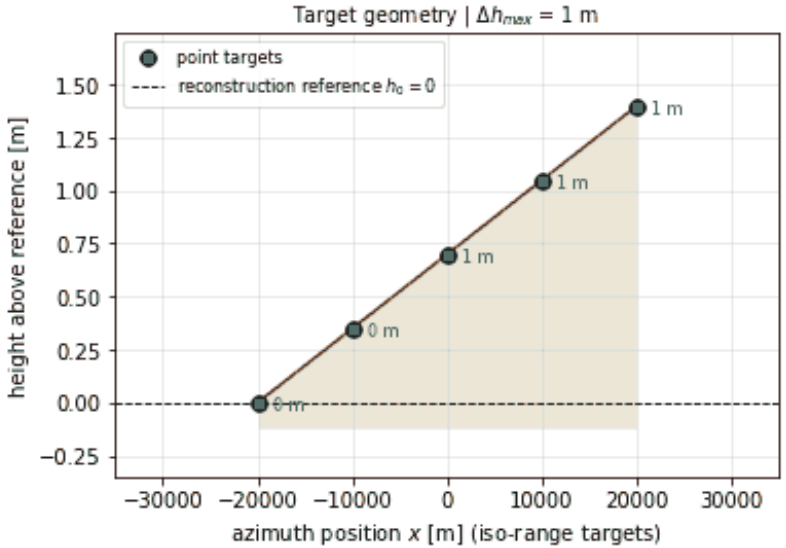


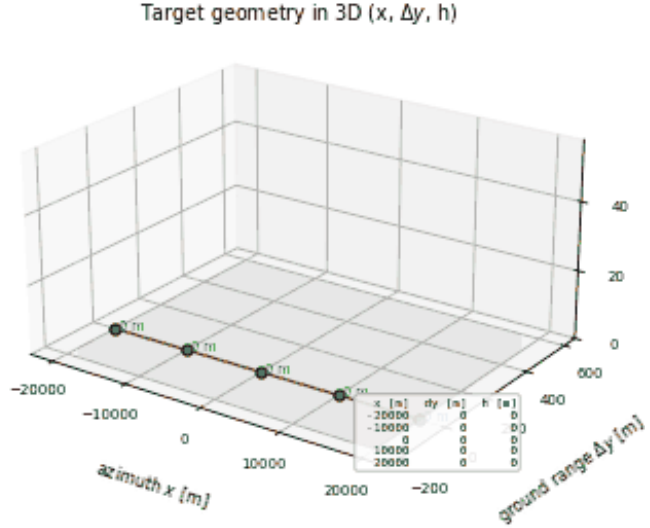
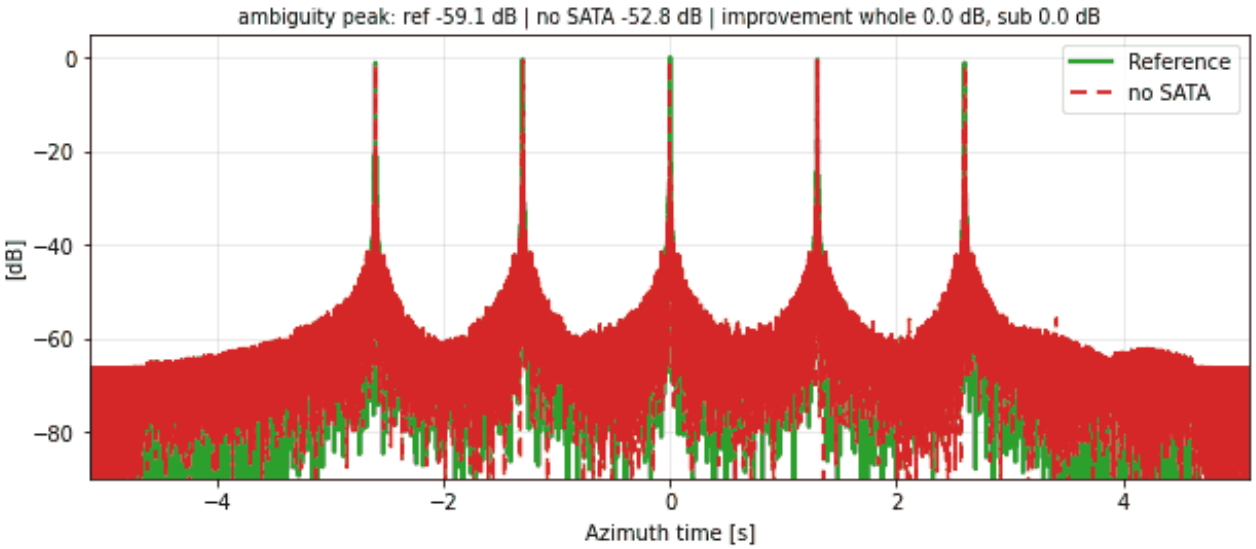



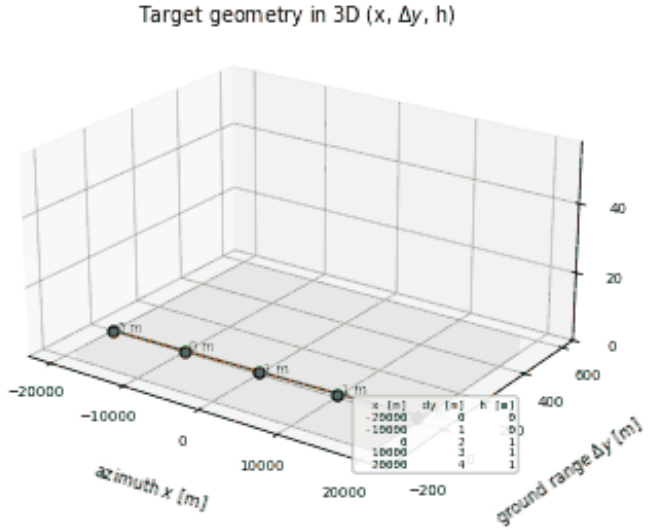
RA-LS-028 | SATA 1D | along-track ramp: N = 5, $\alpha = 1°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

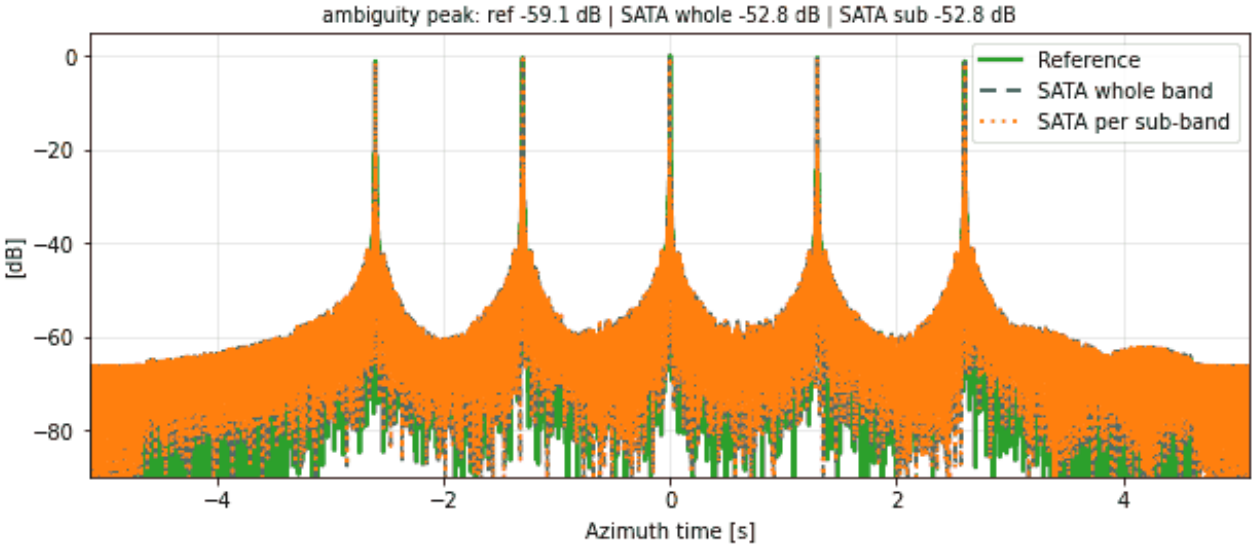





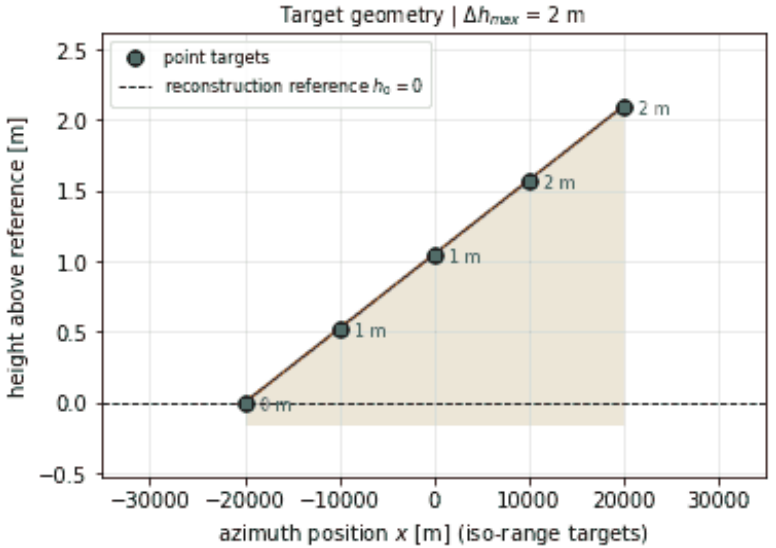



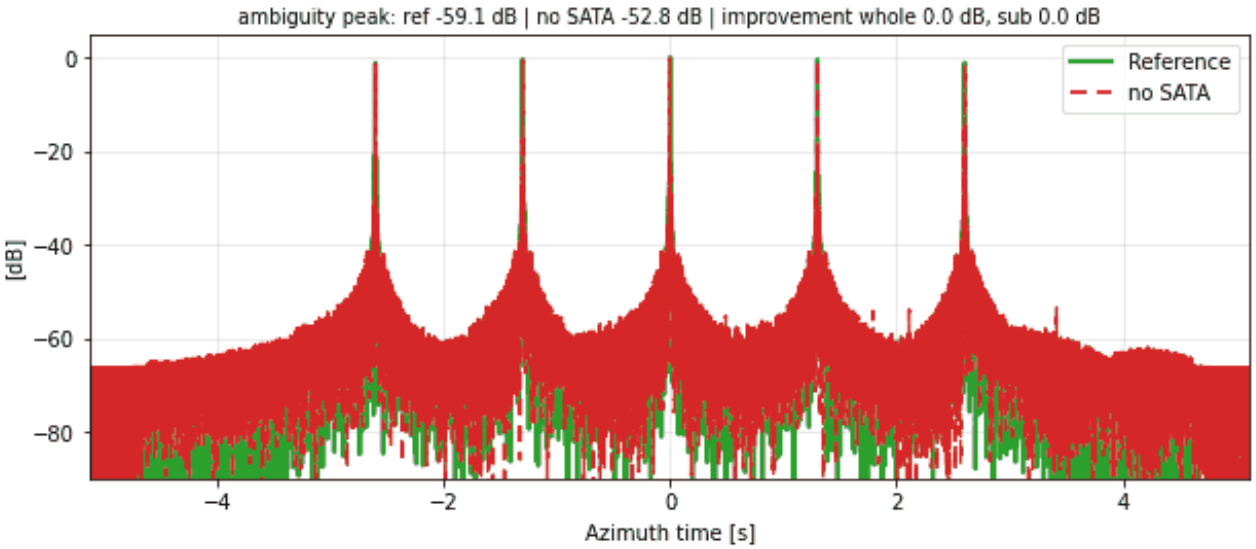



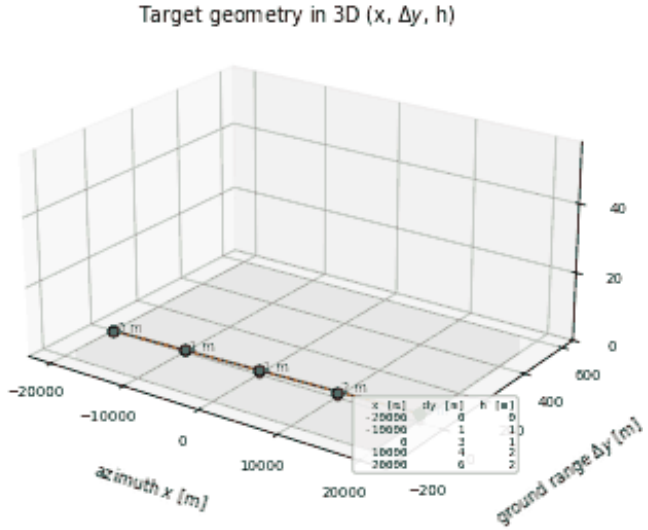
RA-LS-029 | SATA 1D | along-track ramp: N = 5, $\alpha = 1.5°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

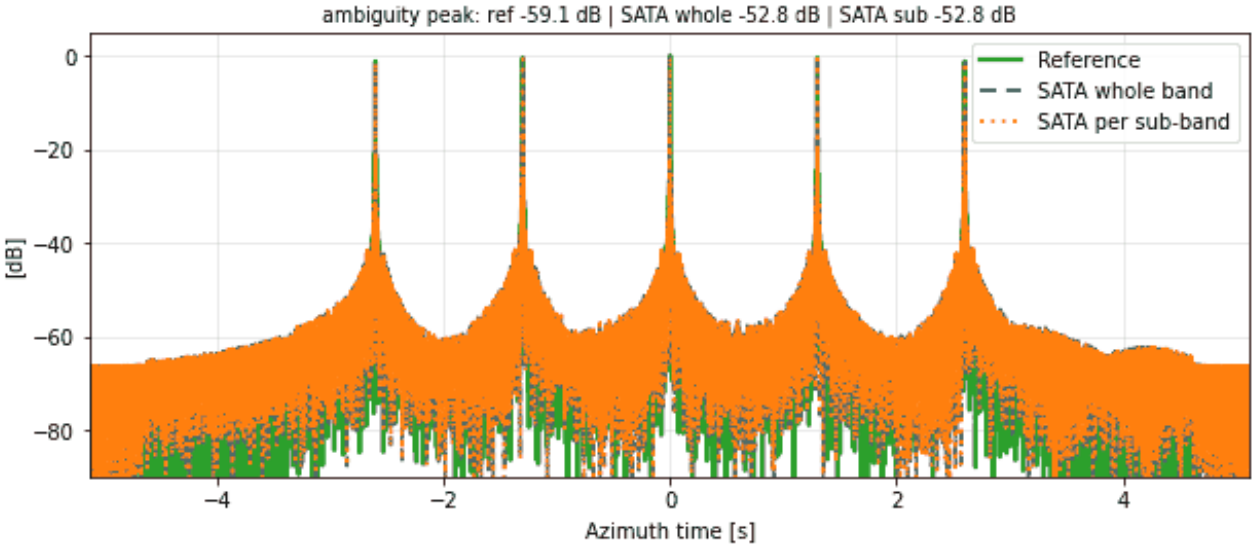






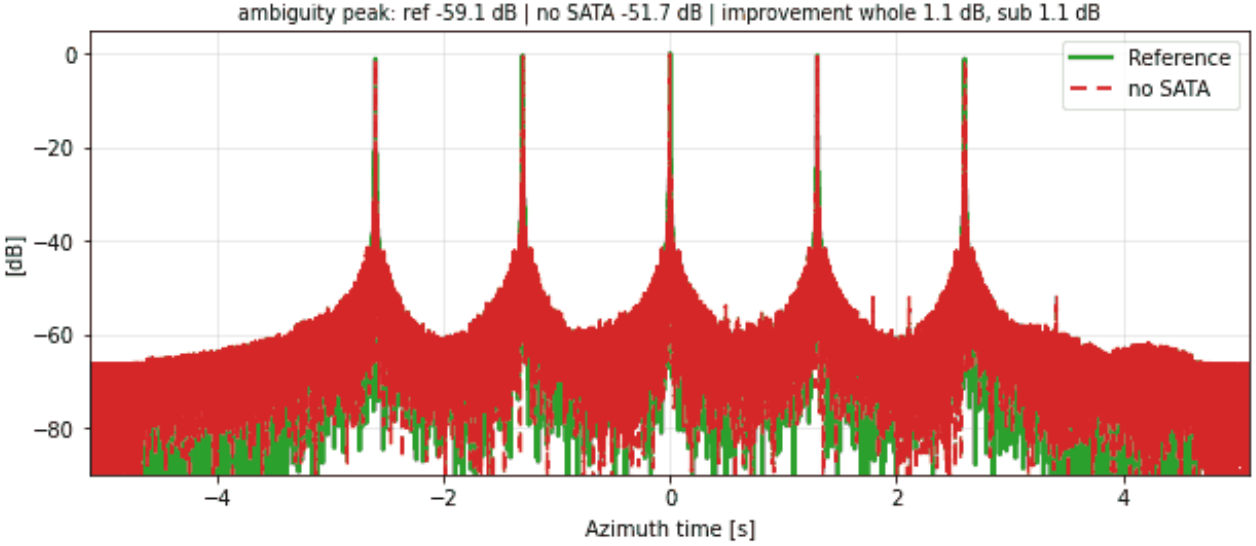



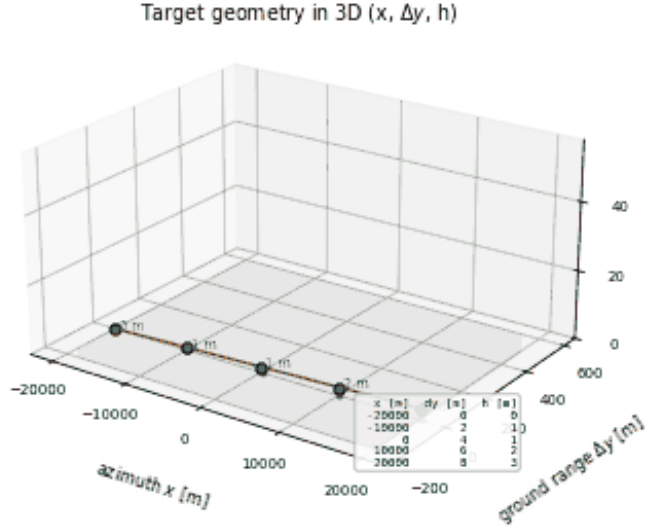



RA-LS-030 | SATA 1D | along-track ramp: N = 5, $\alpha = 2°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

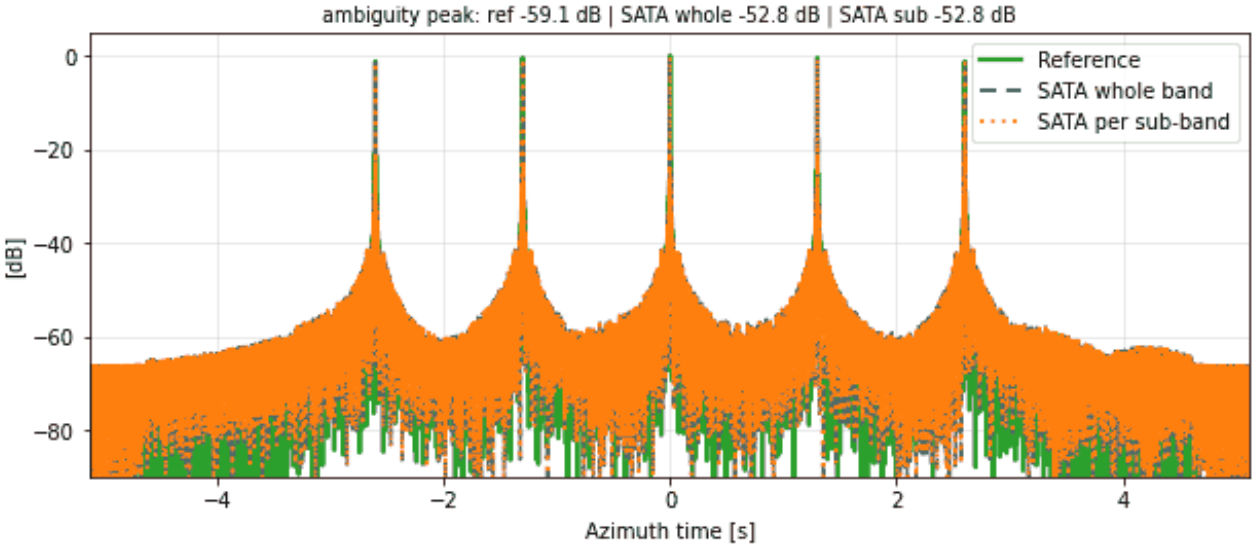

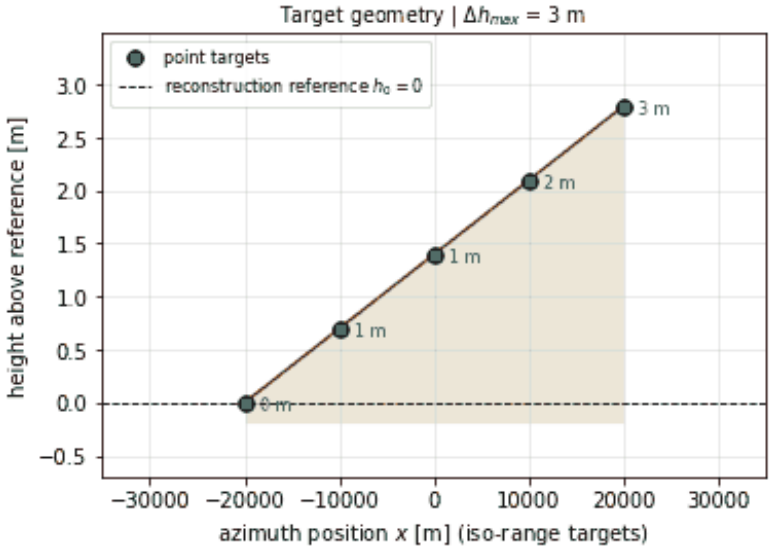



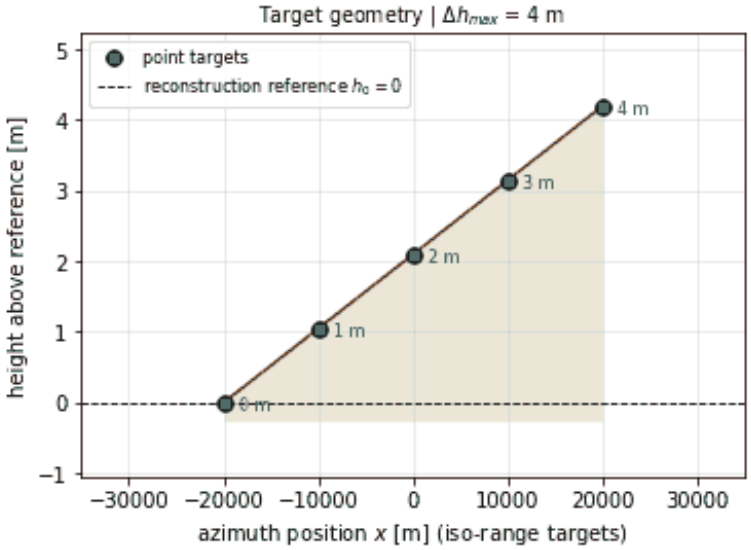



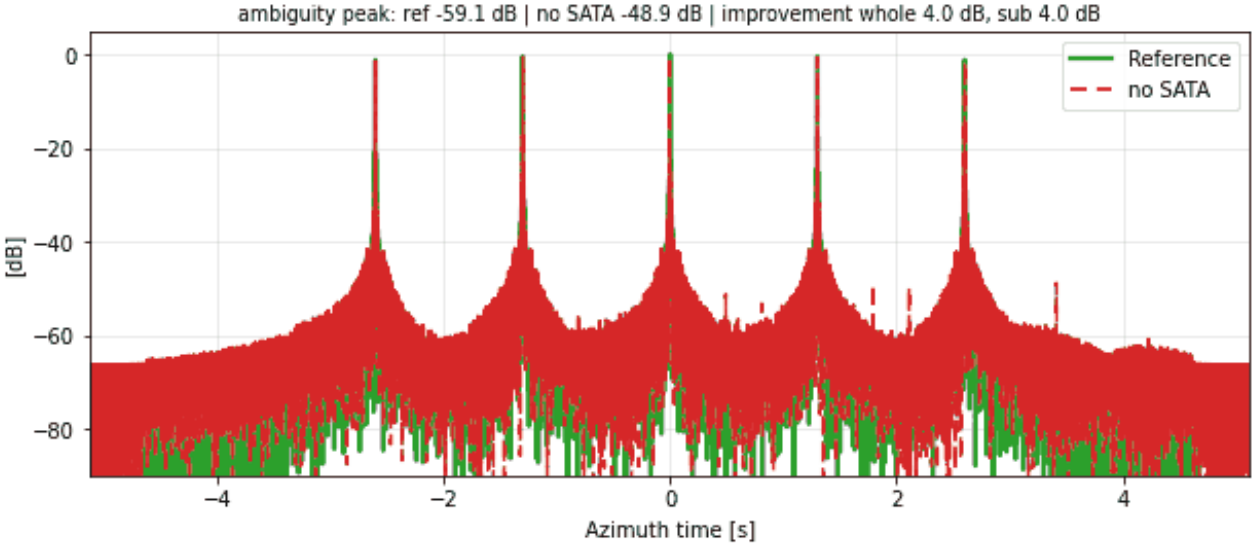



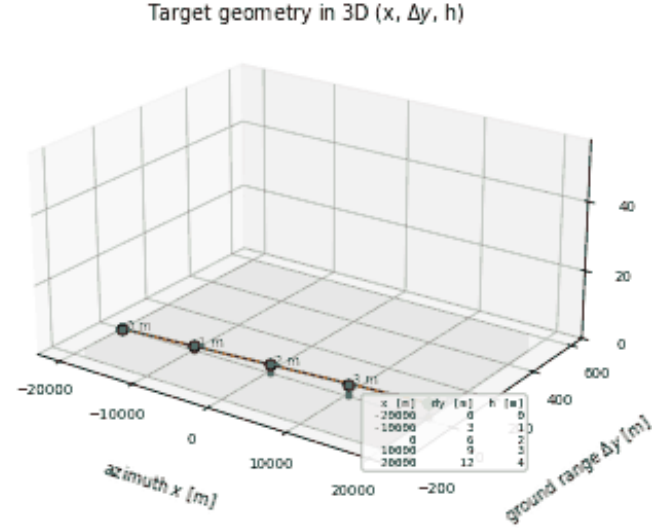

404

RA-LS-031 | SATA 1D | along-track ramp: N = 5, $\alpha = 3°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

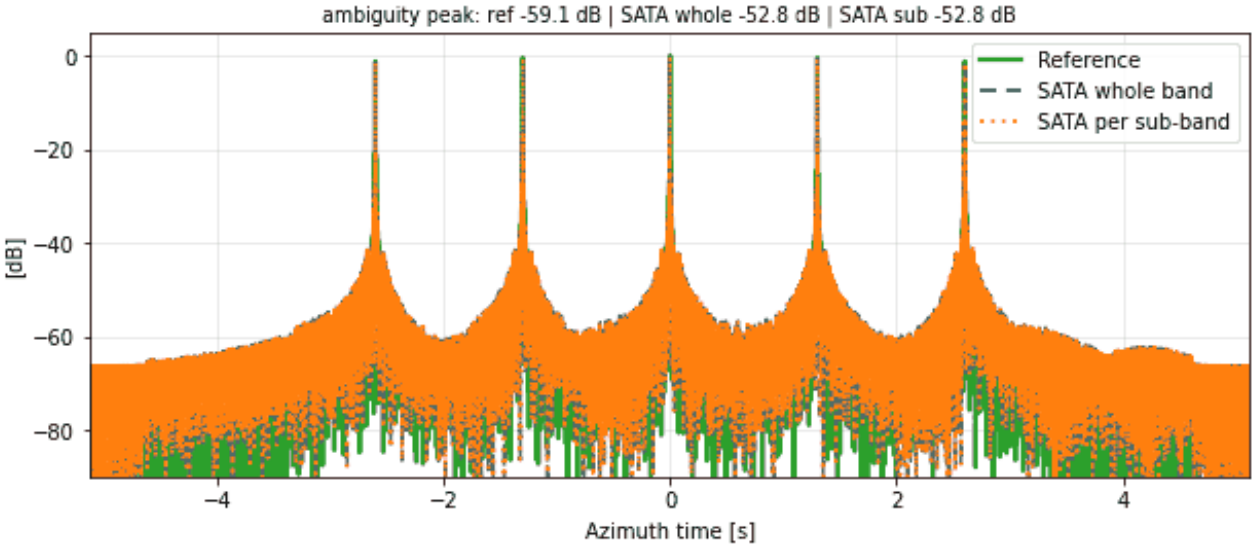






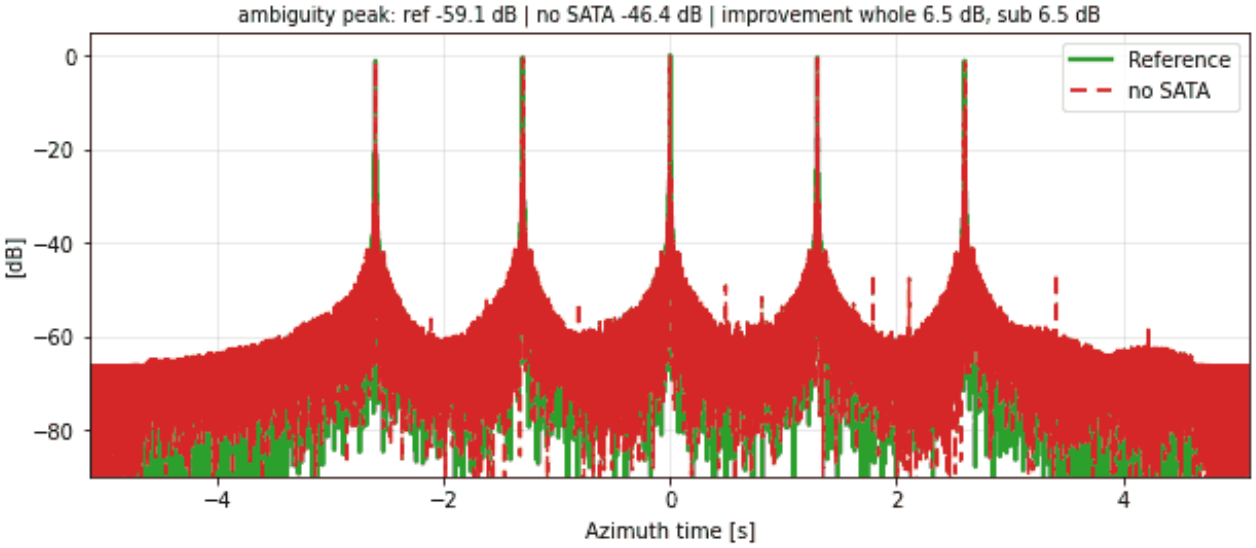



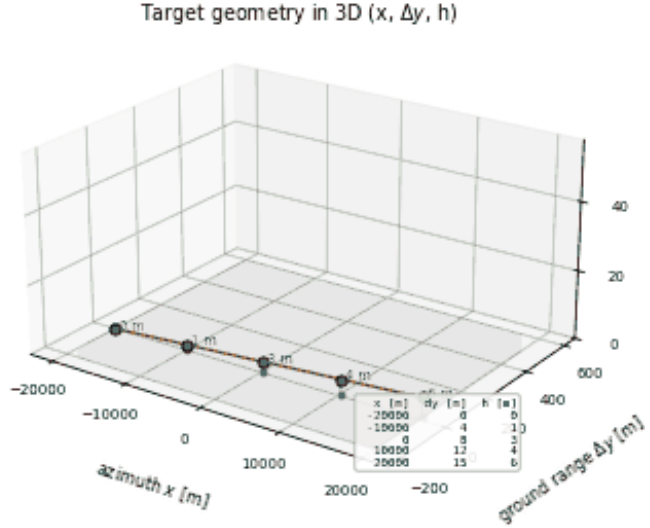



RA-LS-032 | SATA 1D | along-track ramp: N = 5, $\alpha = 4°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

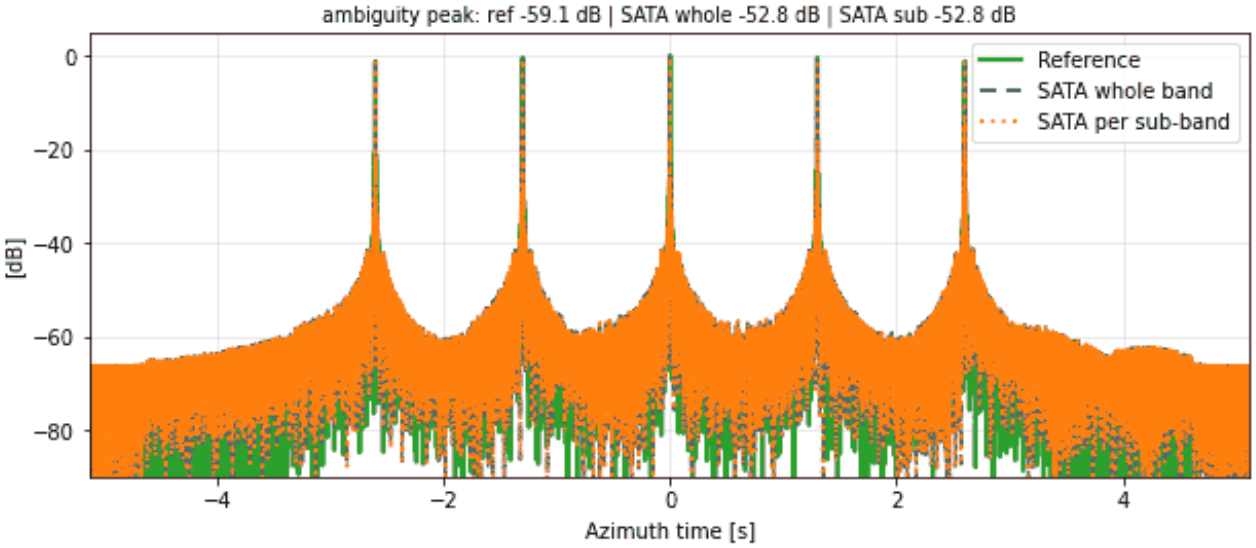

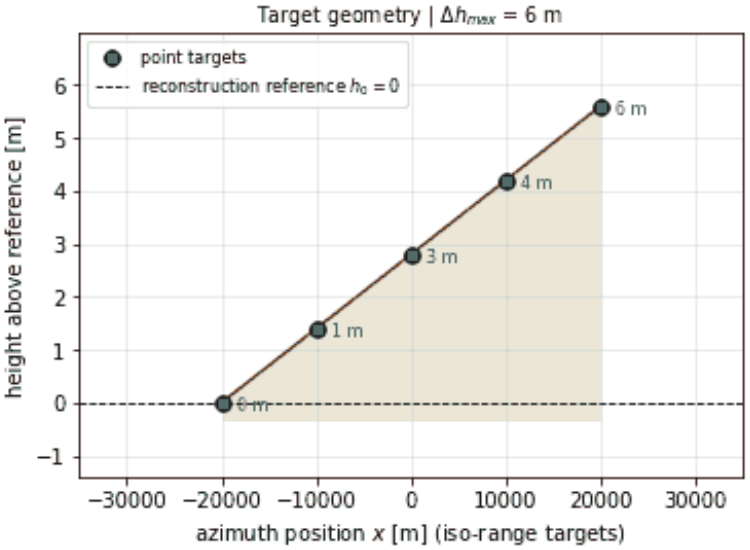



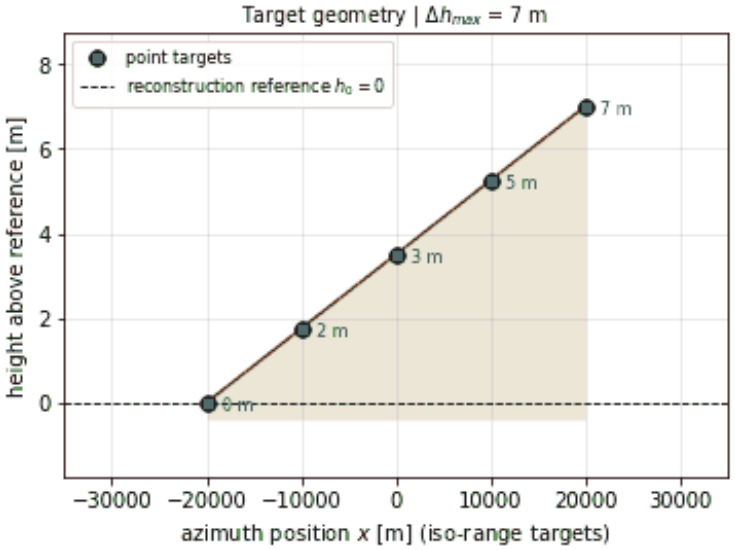



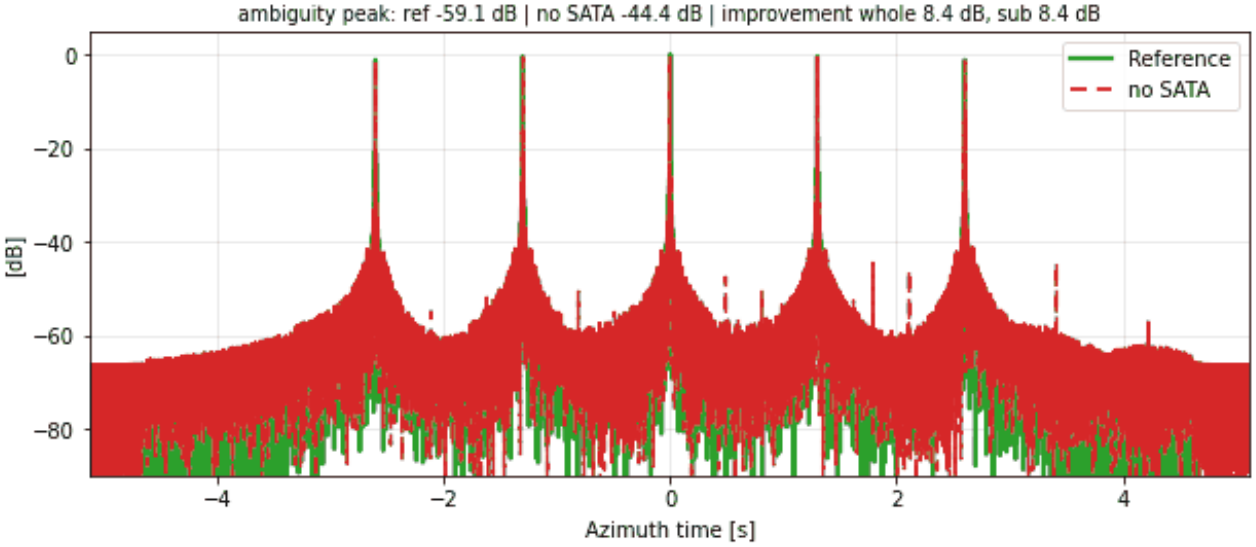

406


RA-LS-033 | SATA 1D | along-track ramp: N = 5, $\alpha = 5°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

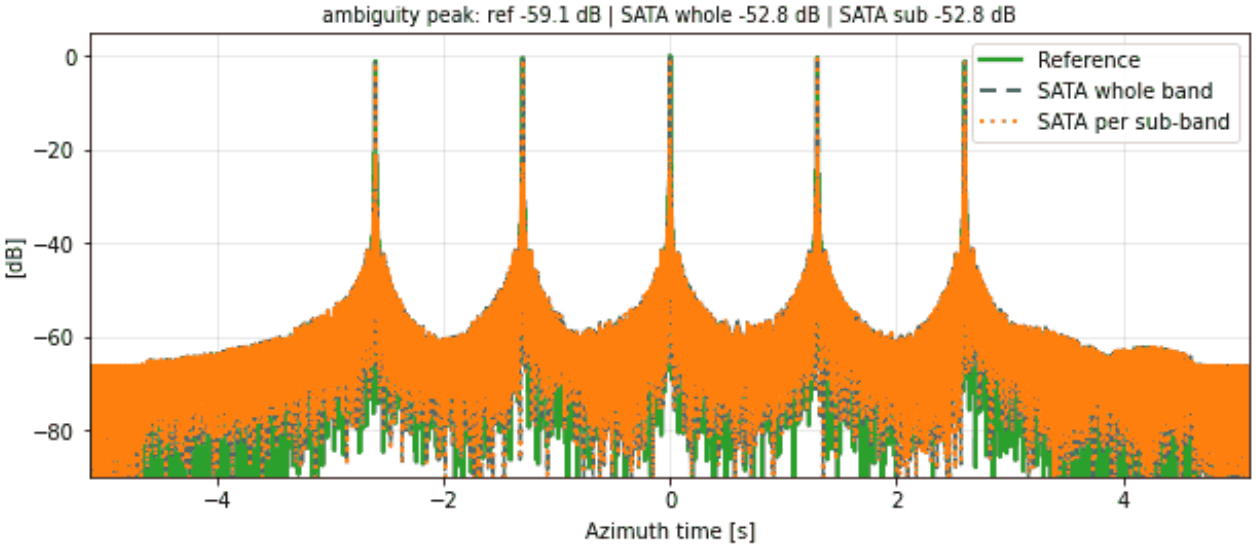






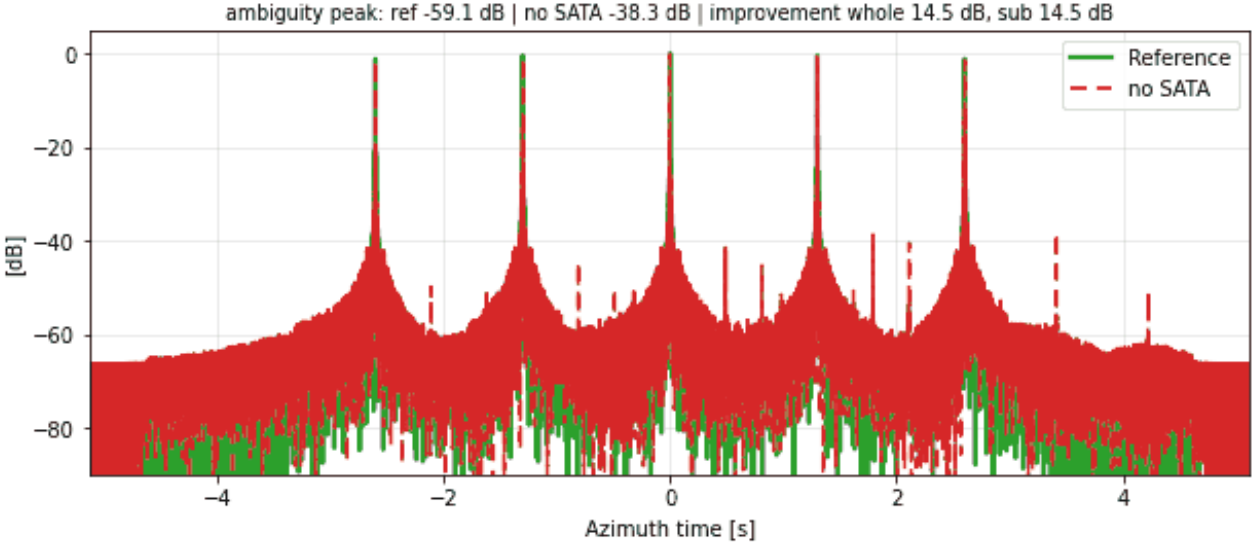


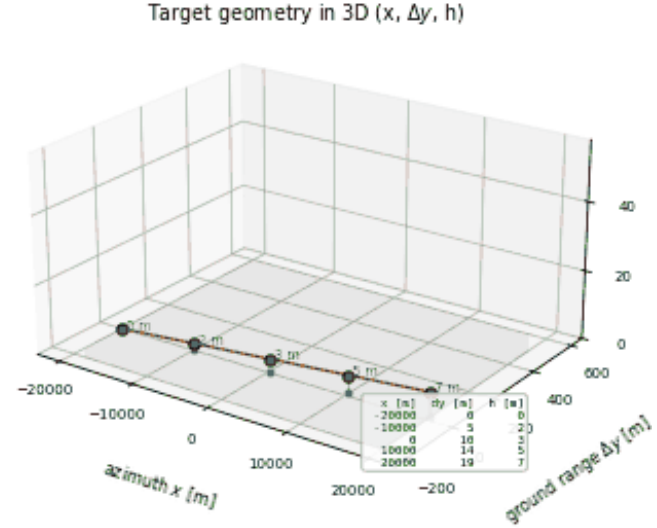
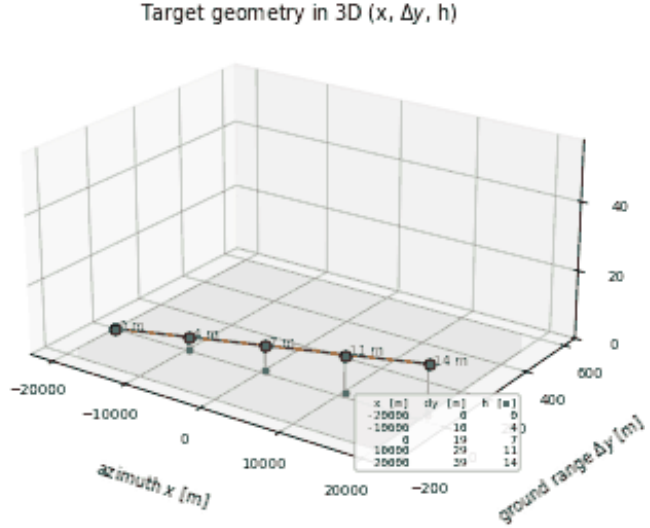



RA-LS-034 | SATA 1D | along-track ramp: N = 5, $\alpha = 10^\circ$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

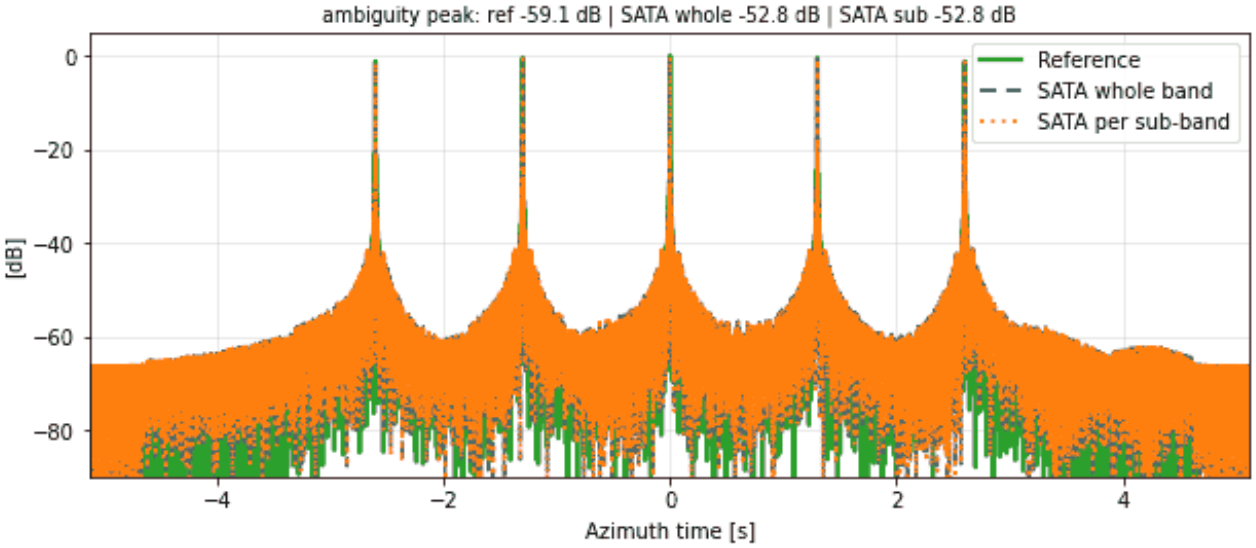

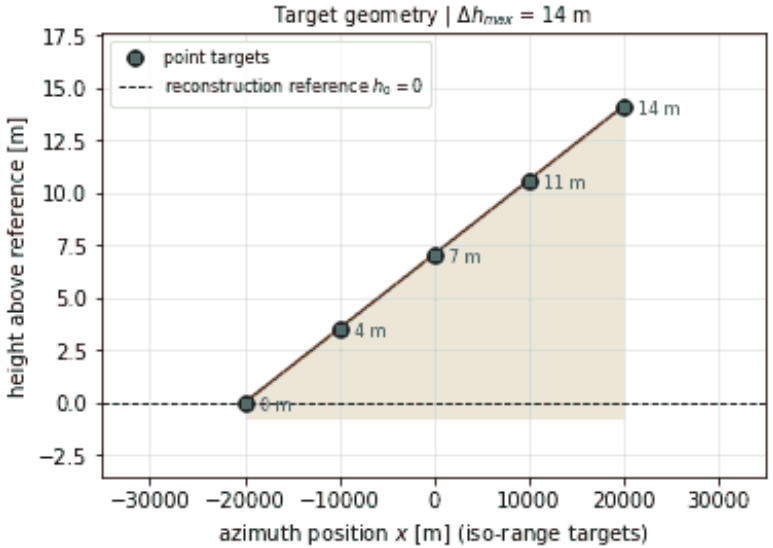



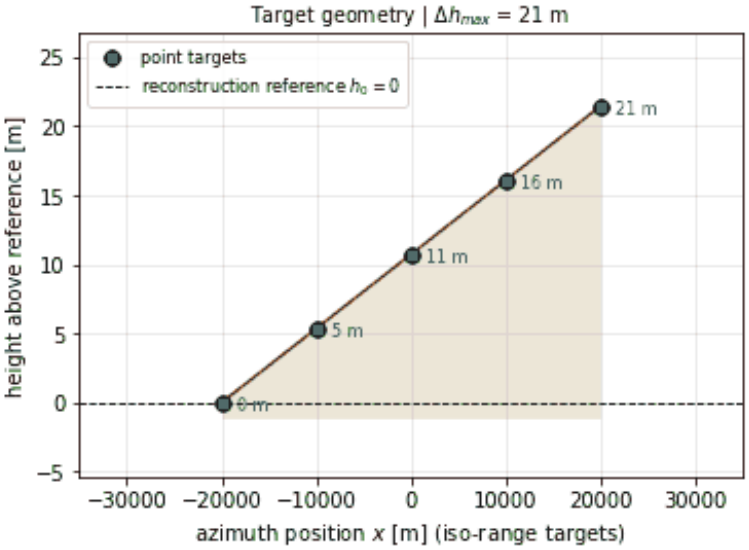



RA-LS-035 | SATA 1D | along-track ramp: N = 5, $\alpha = 15^\circ$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights


$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)



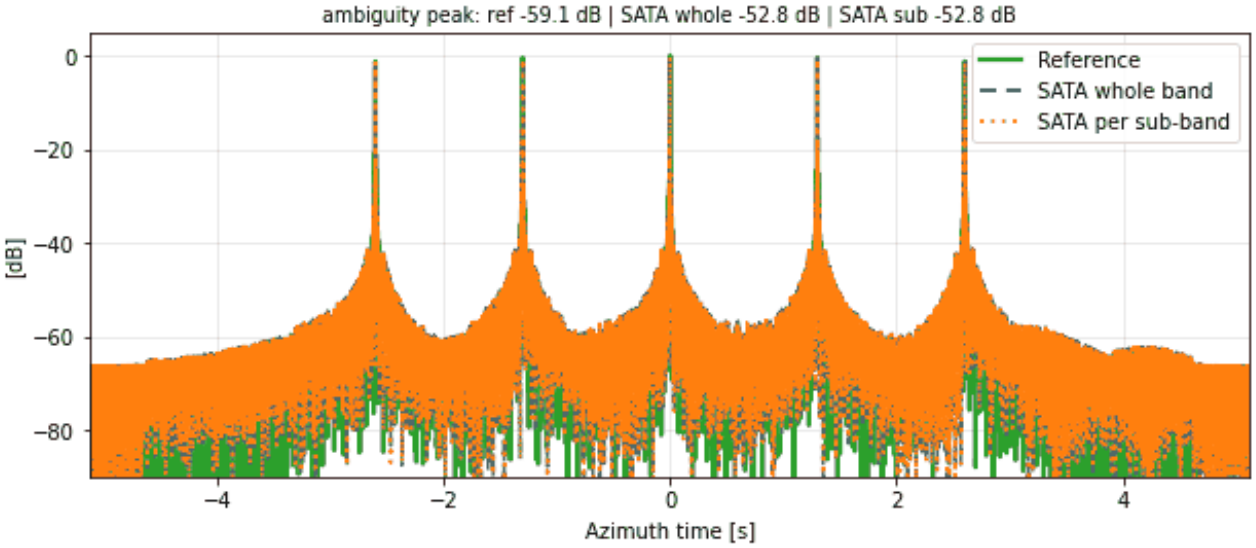





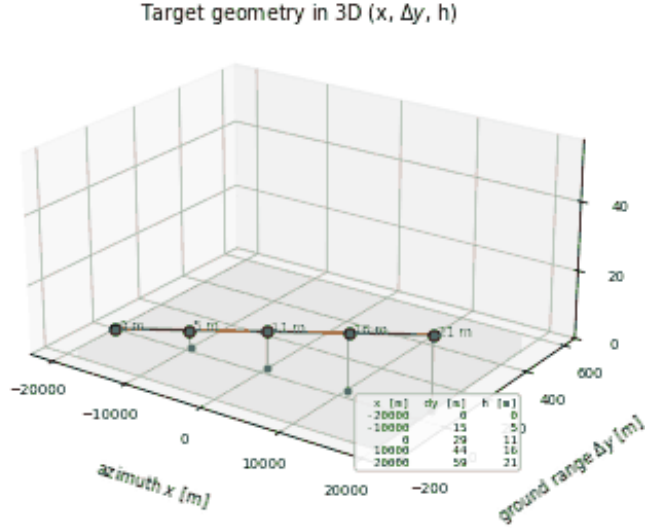



RA-LS-036 | SATA 1D | along-track ramp: N = 5, $\alpha = 20^\circ$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

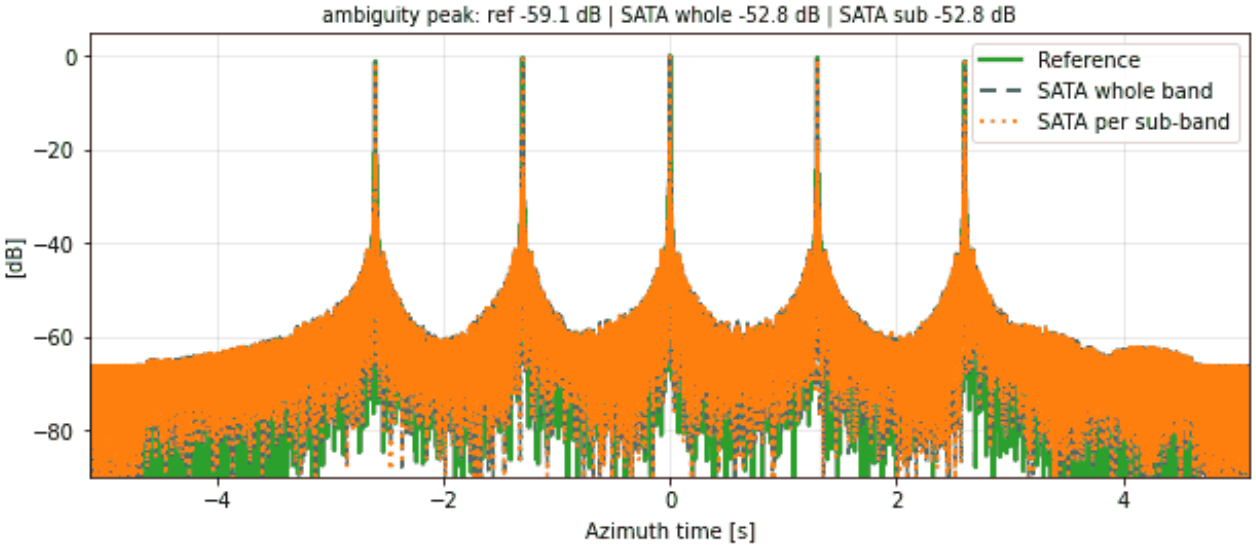

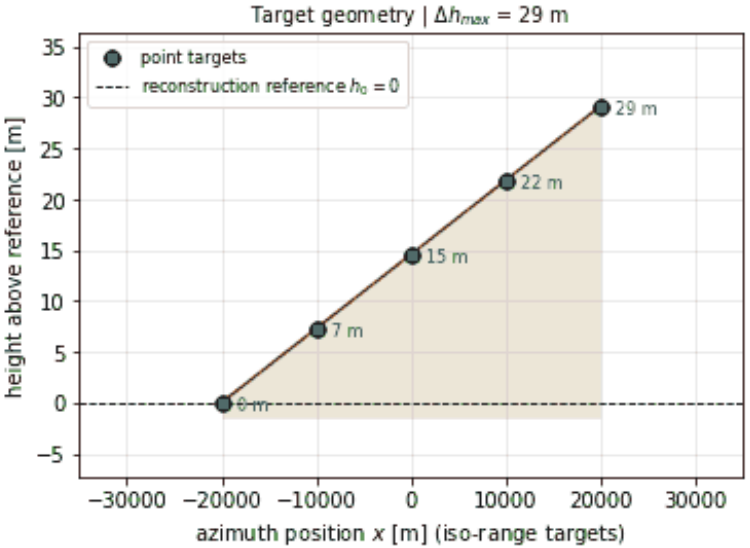


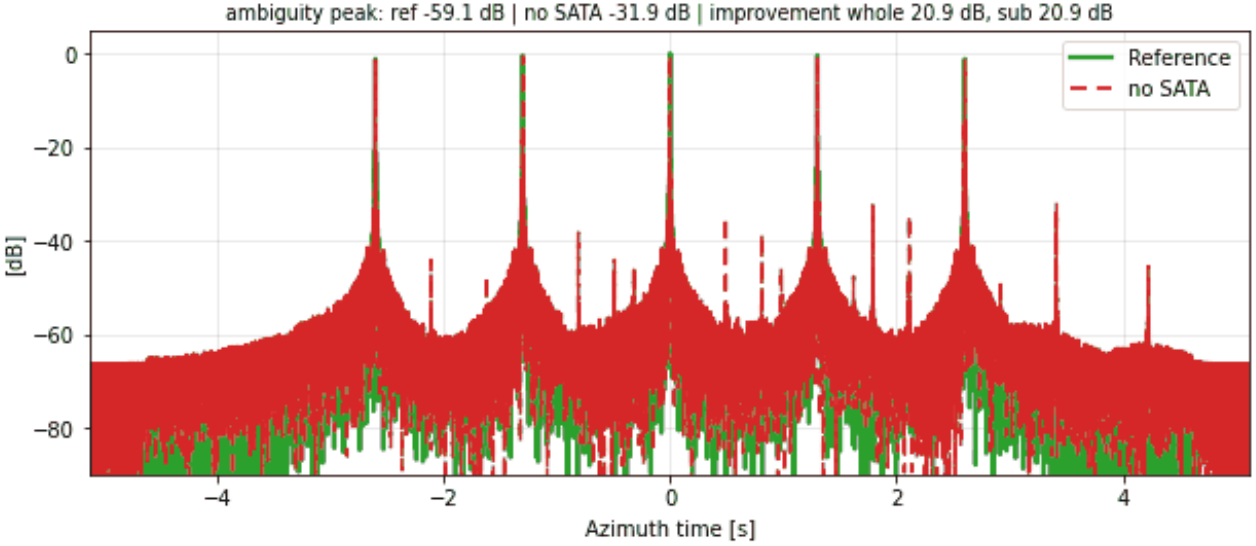
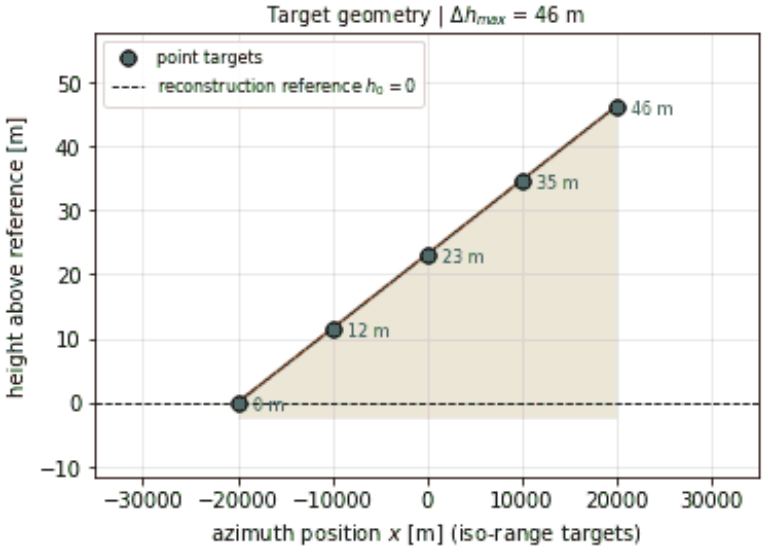


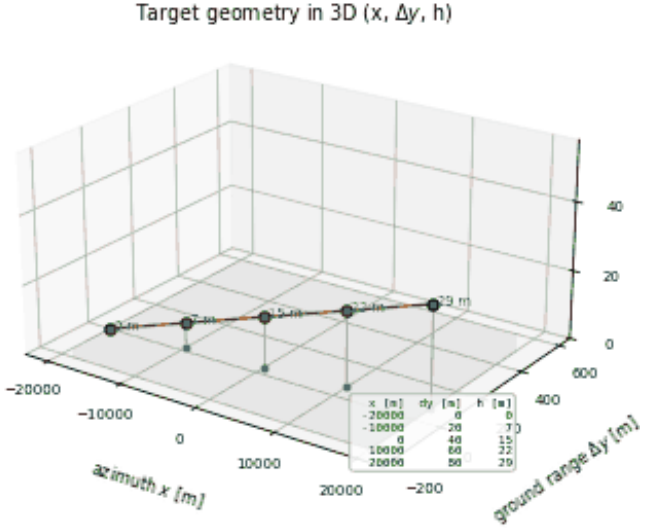
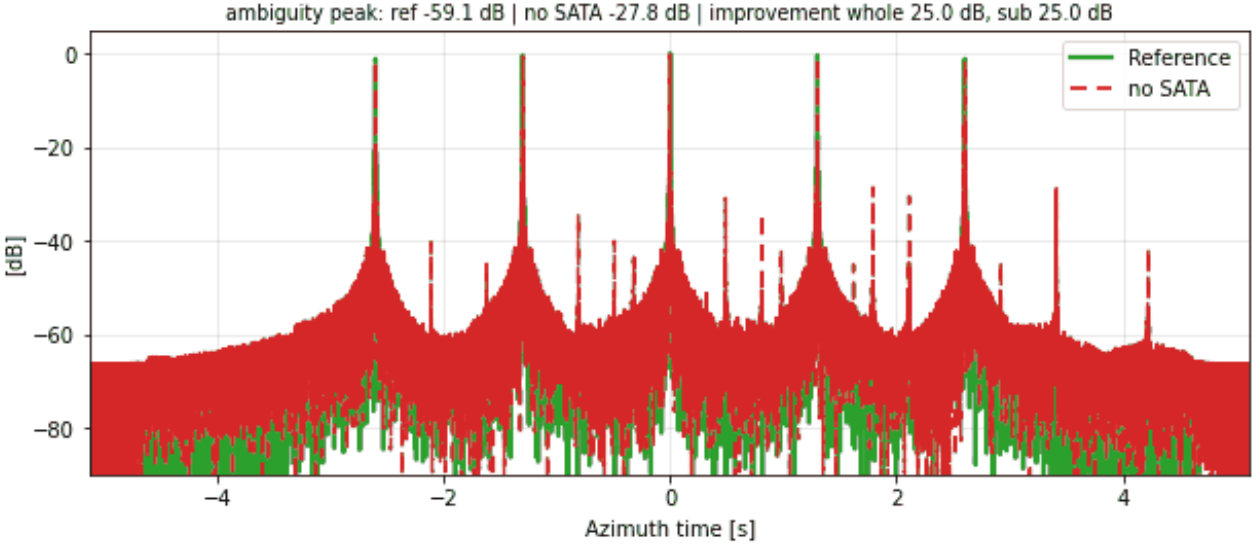



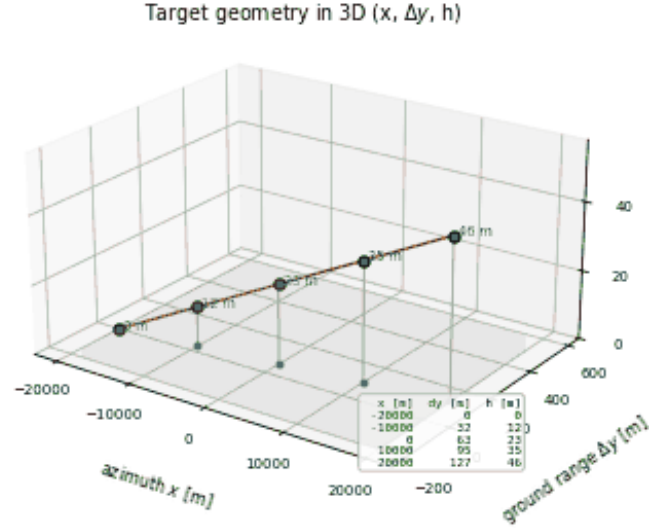
RA-LS-037 | SATA 1D | along-track ramp: N = 5, $\alpha = 30^\circ$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

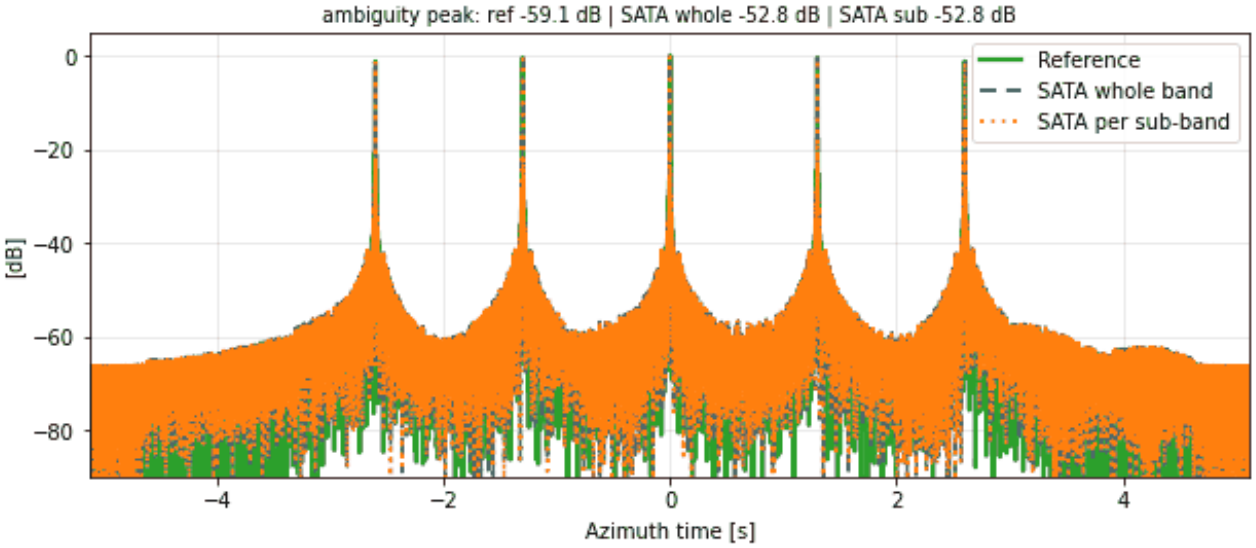





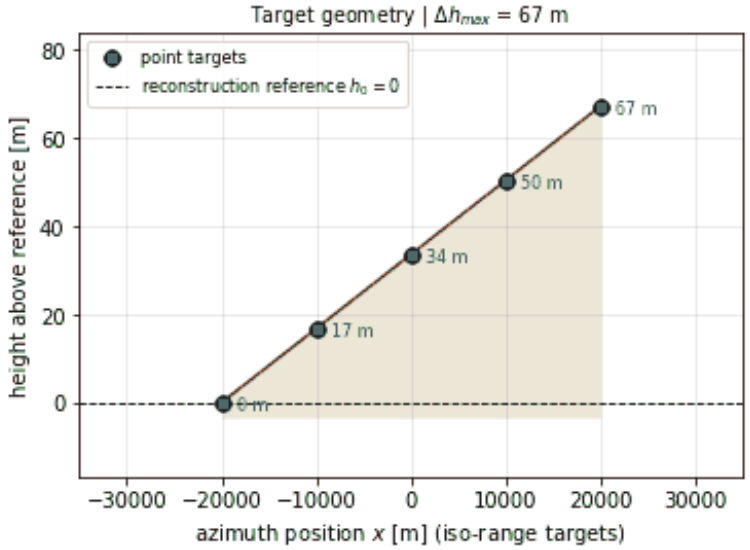



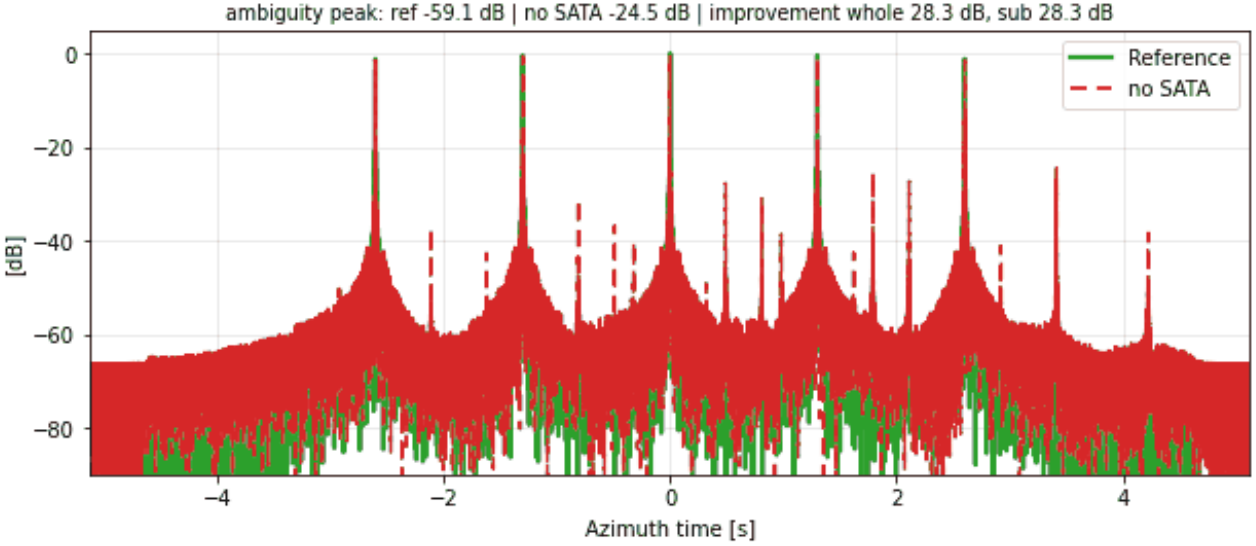

411


RA-LS-038 | SATA 1D | along-track ramp: N = 5, $\alpha = 40°$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

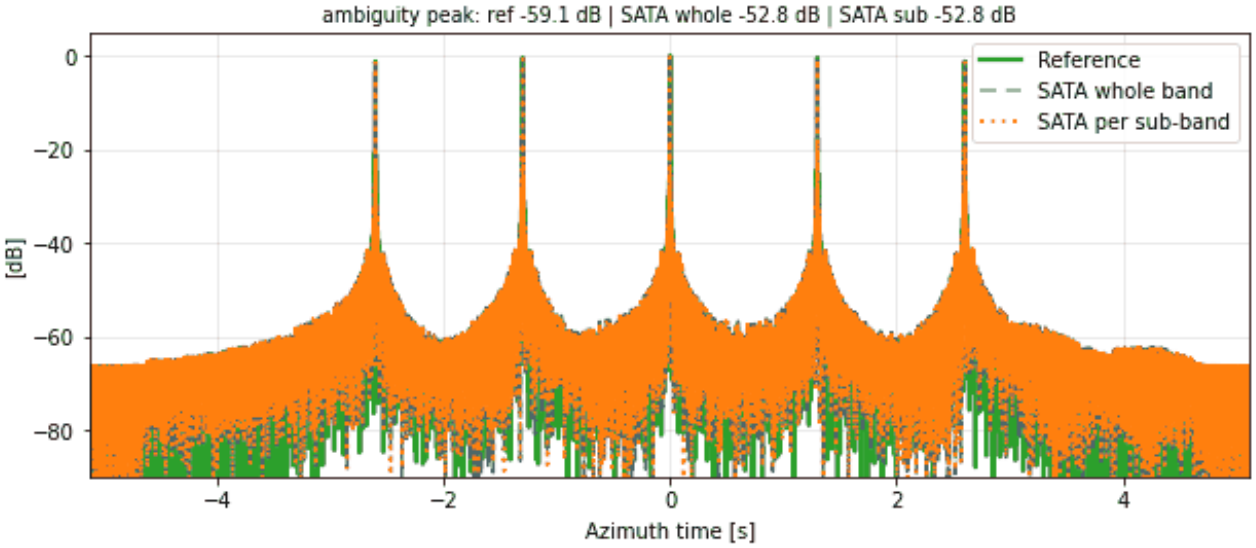





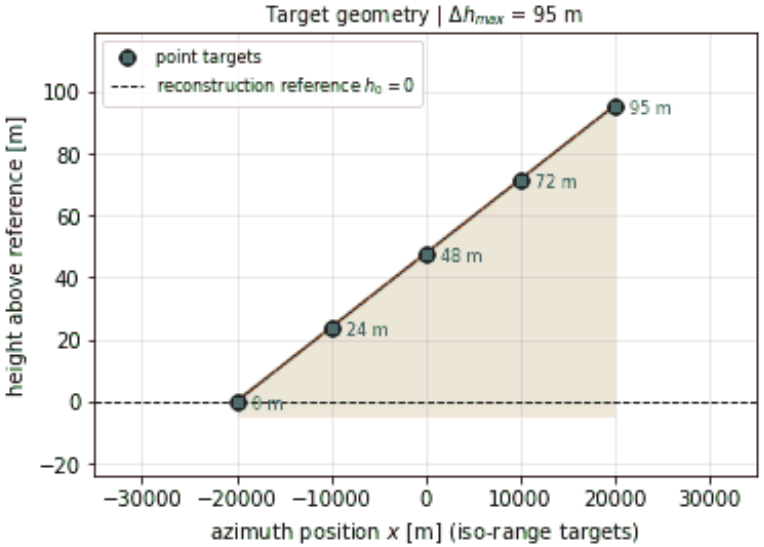


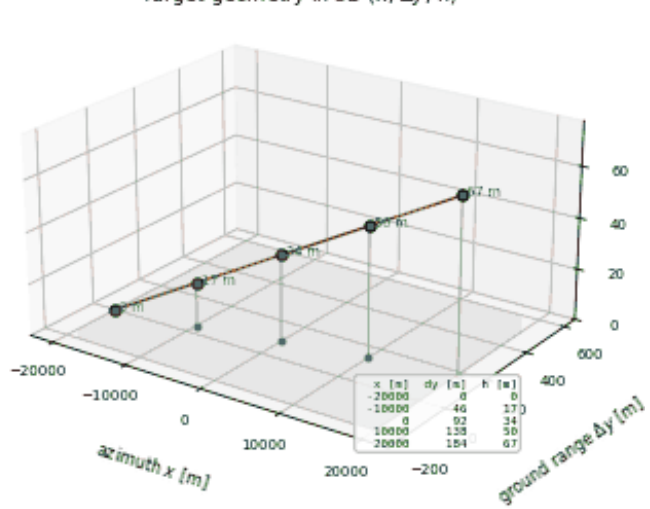
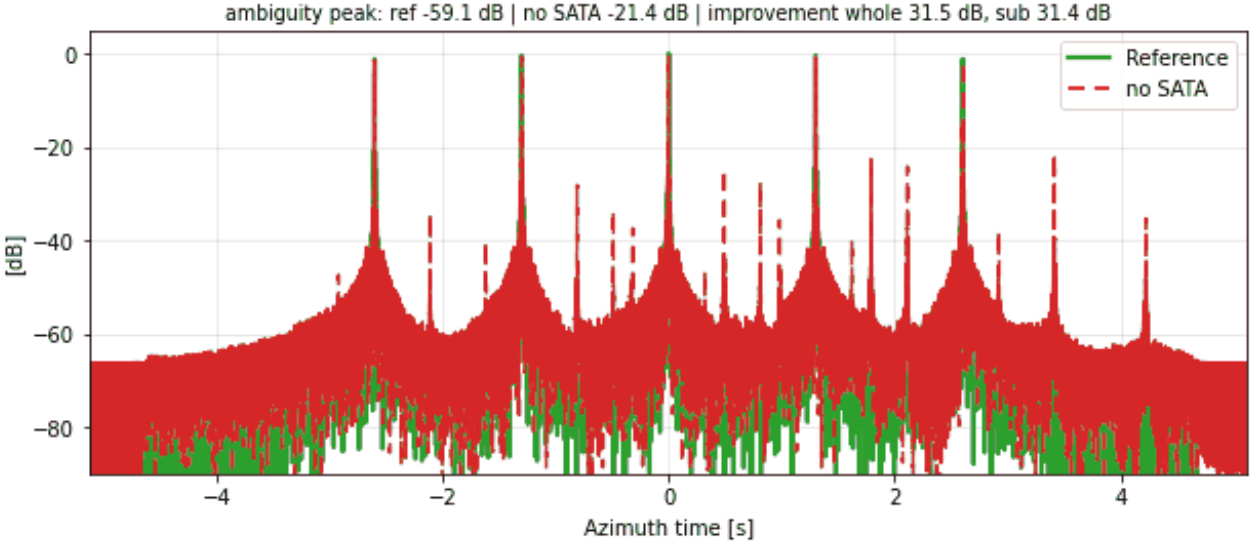



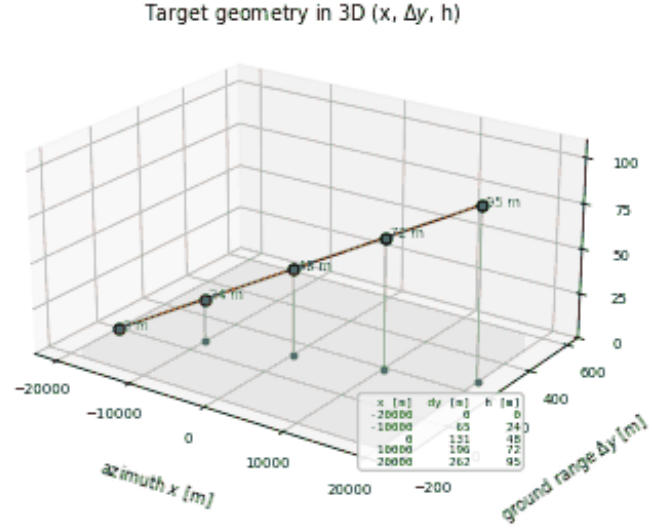
RA-LS-039 | SATA 1D | along-track ramp: N = 5, $\alpha = 50^\circ$ (heights $j \cdot 20\tan\alpha$), targets 10 km apart (large distance), small heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

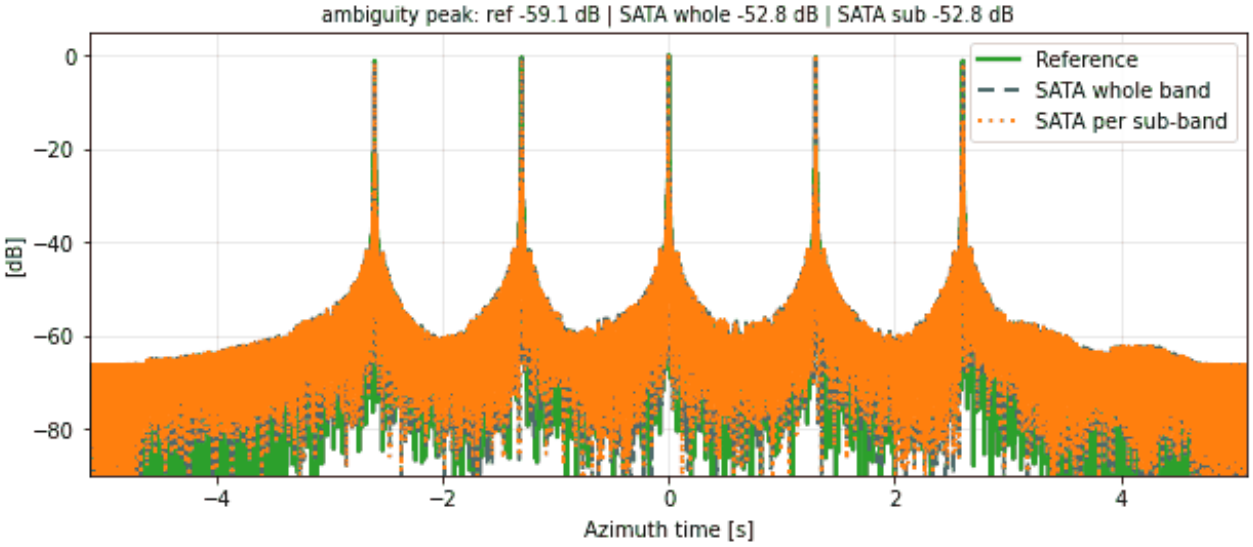





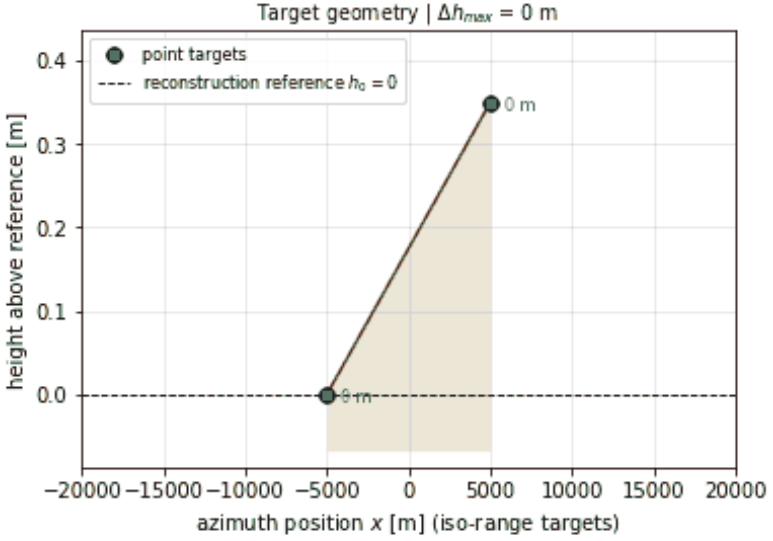



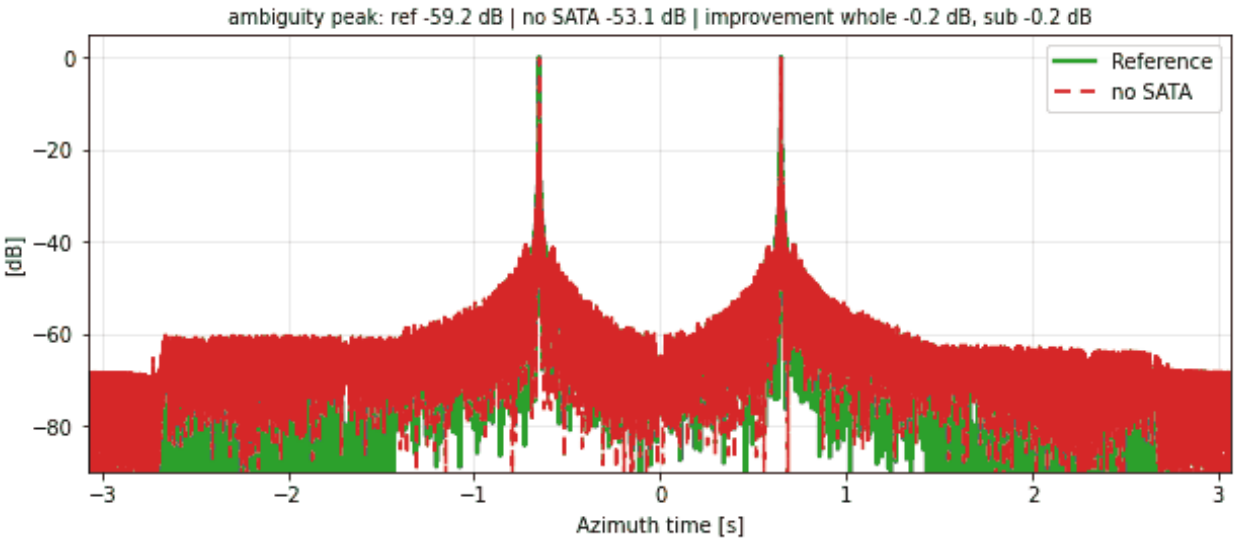



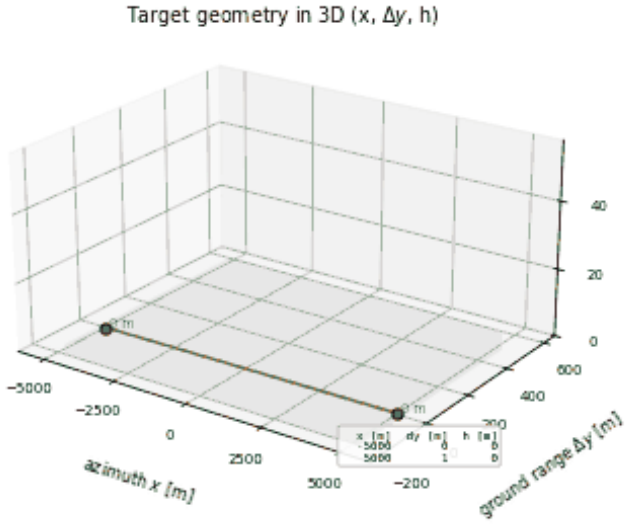

413

RA-LN-001 | SATA 1D | along-track ramp: N = 2, $\alpha = 0.1^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

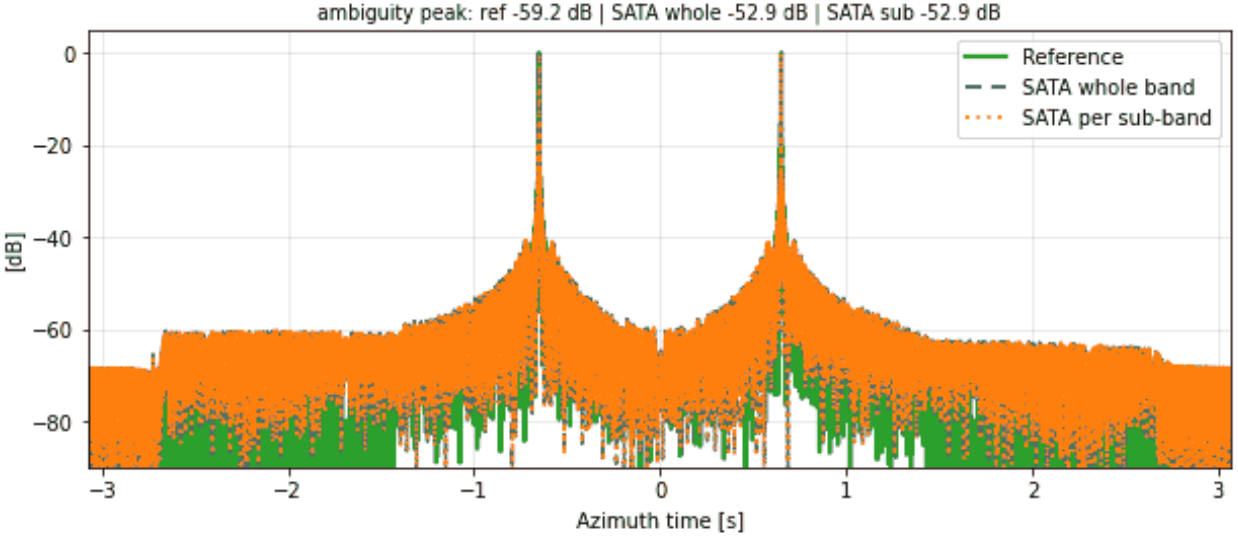






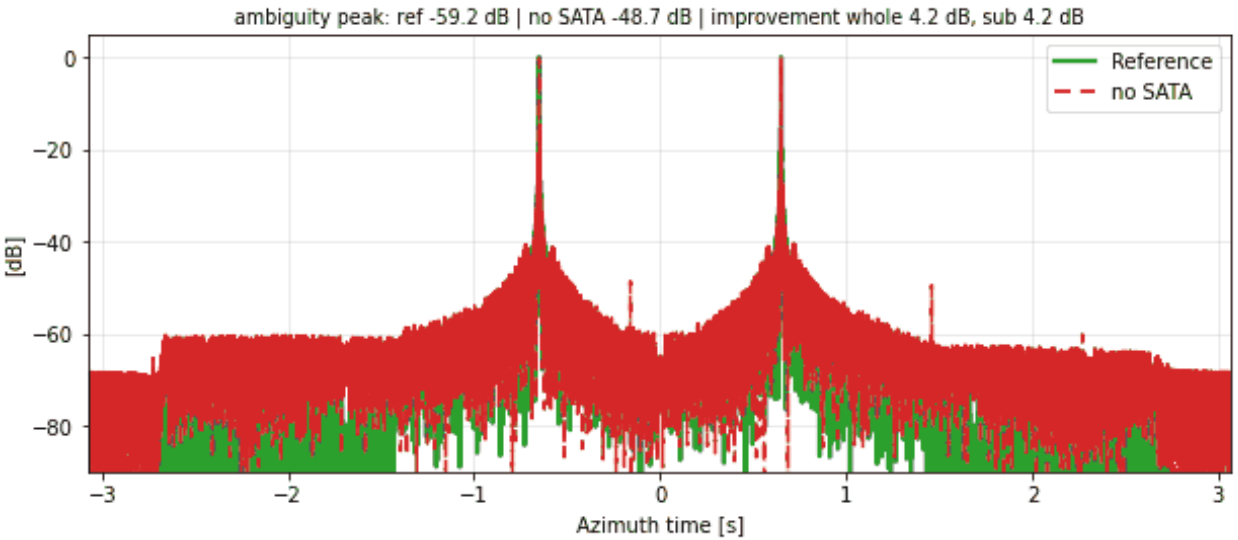



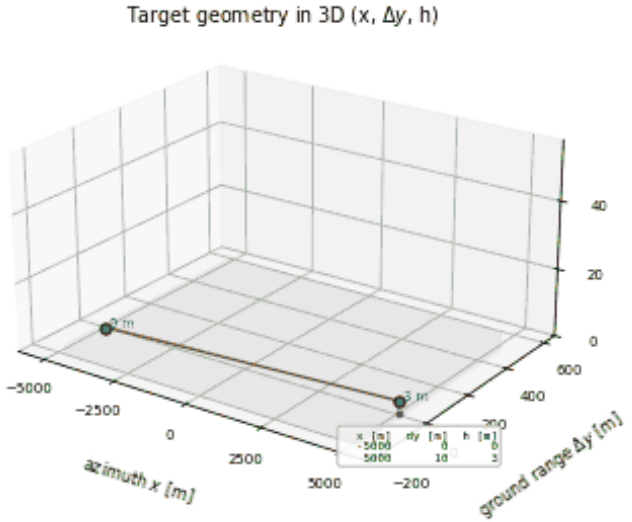



RA-LN-002 | SATA 1D | along-track ramp: N = 2, $\alpha = 1^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

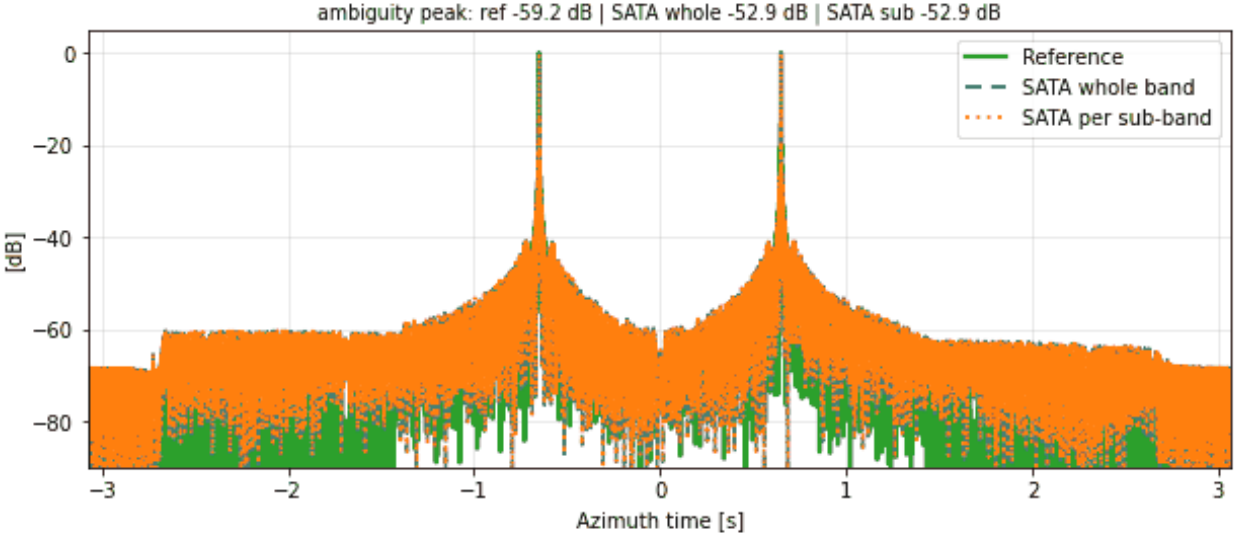

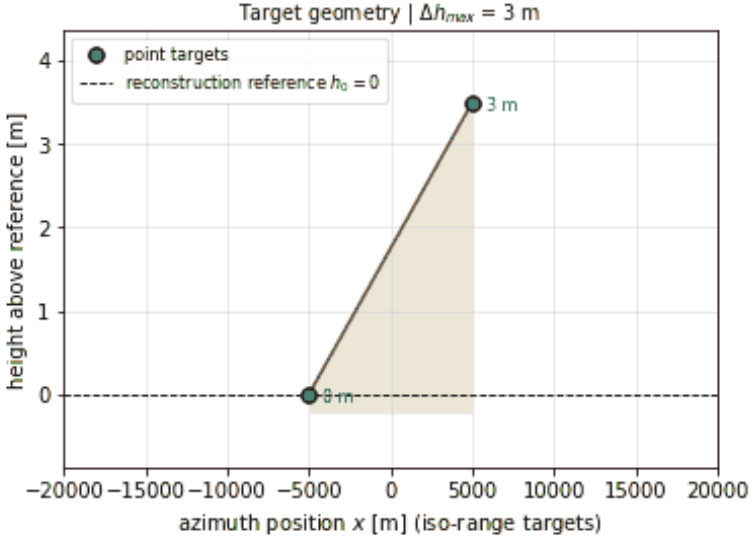



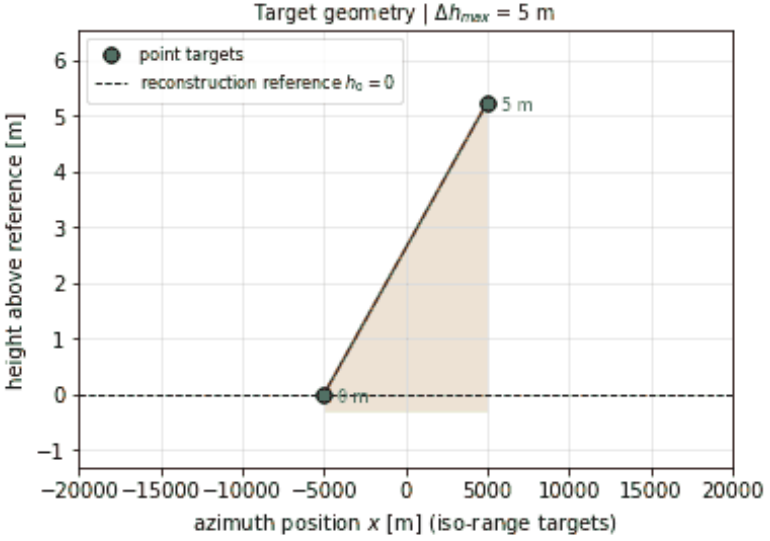



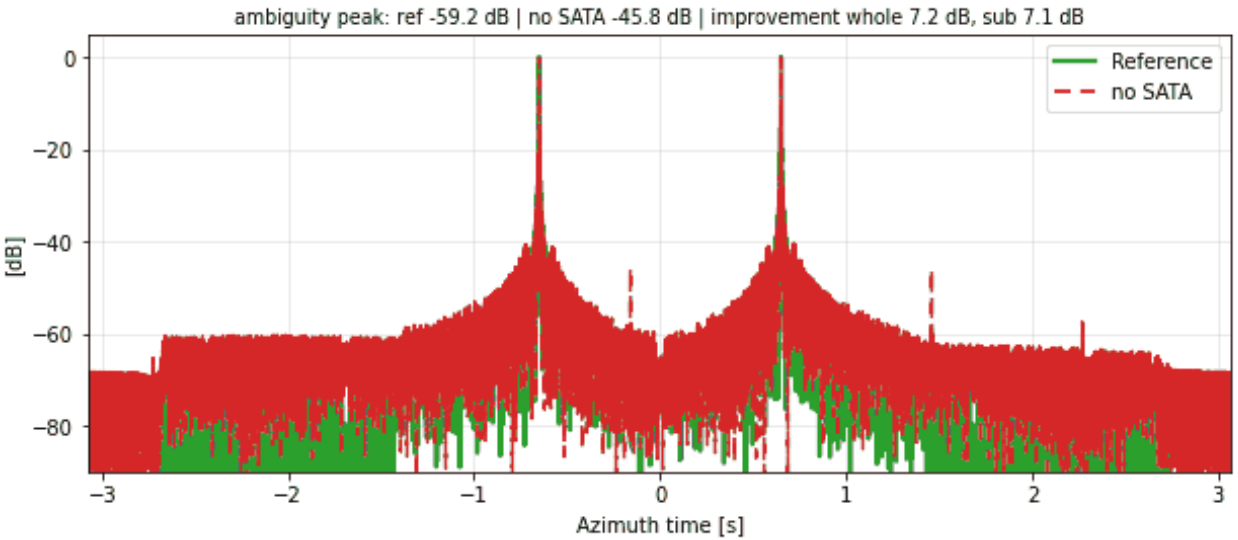



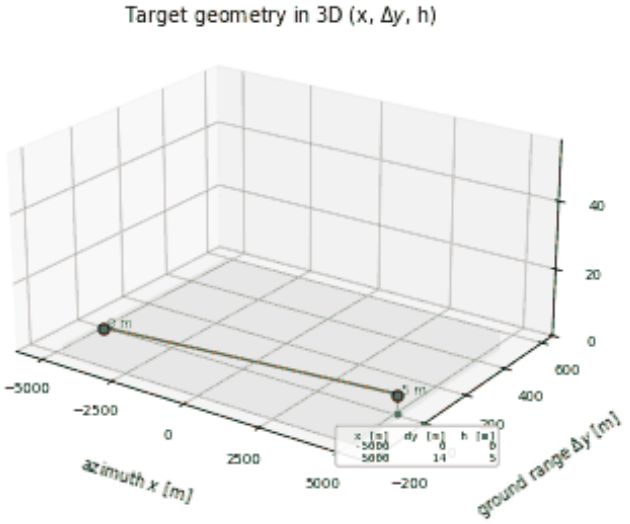

415

RA-LN-003 | SATA 1D | along-track ramp: N = 2, $\alpha = 1.5°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

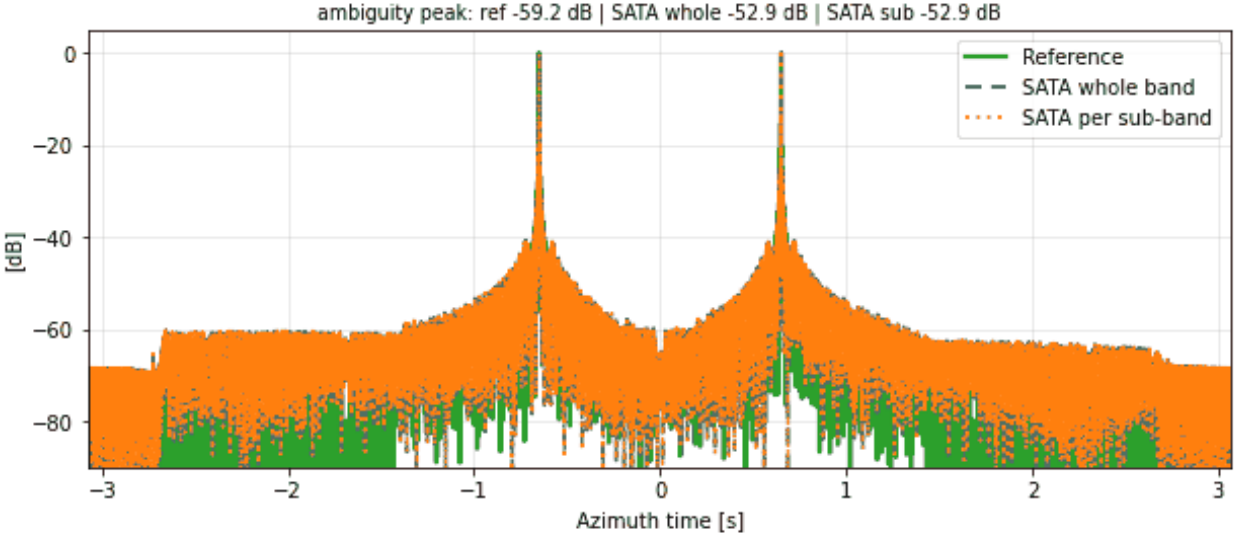






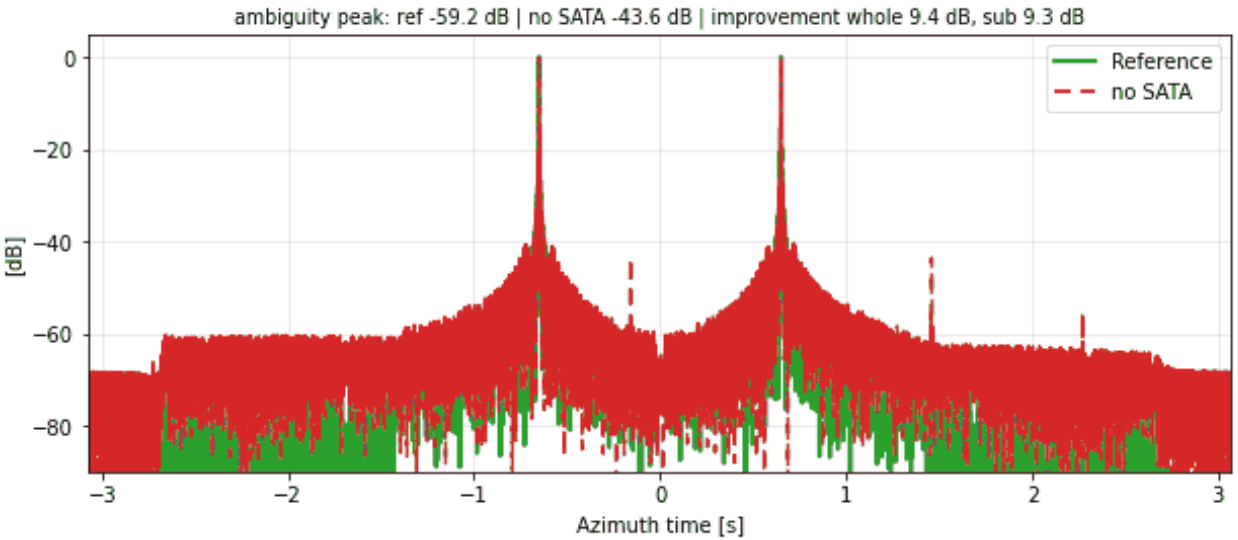



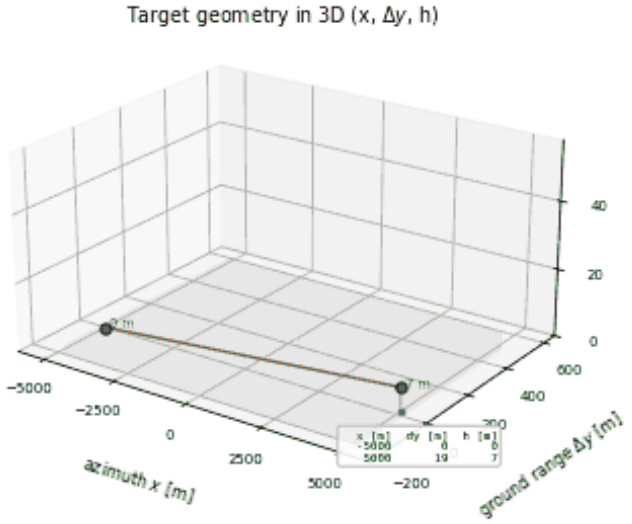



RA-LN-004 | SATA 1D | along-track ramp: N = 2, $\alpha = 2°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

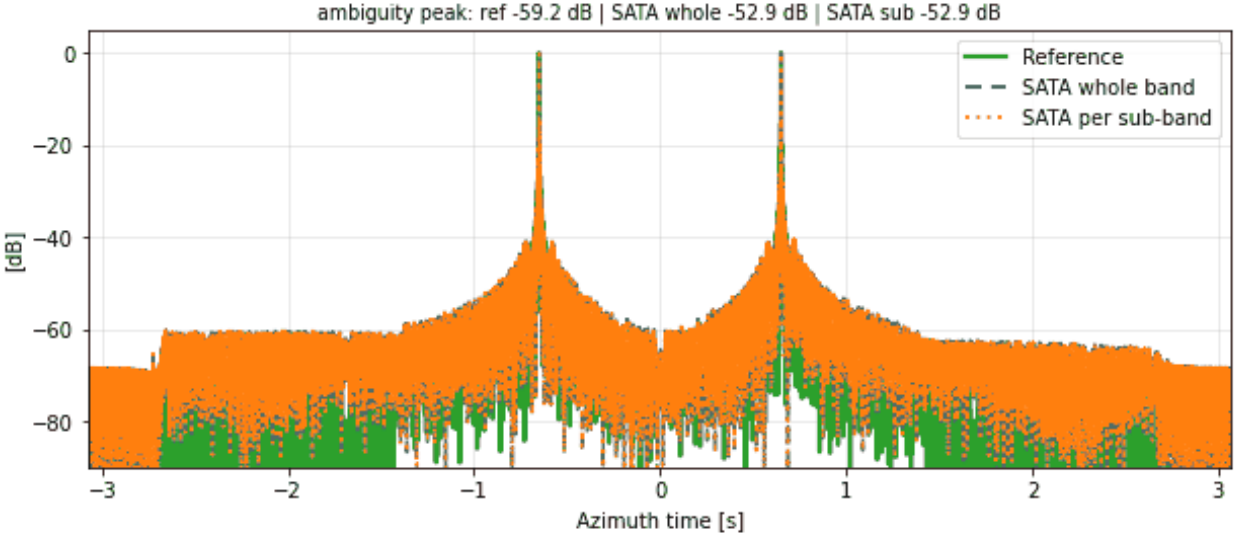


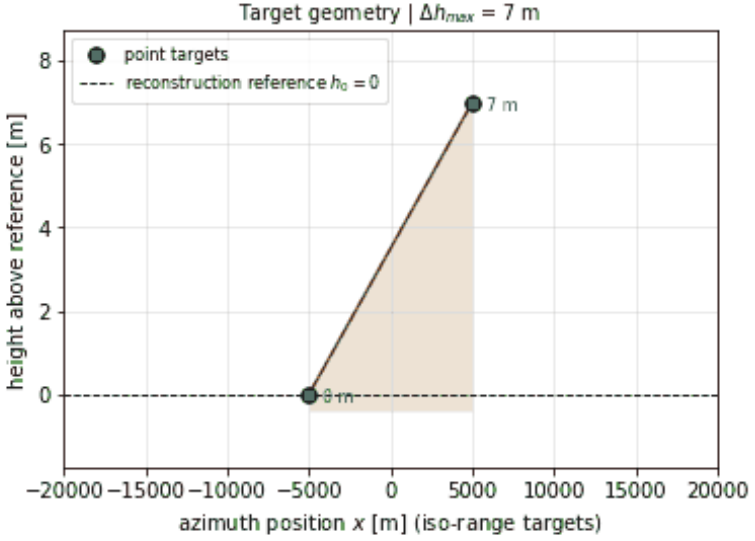



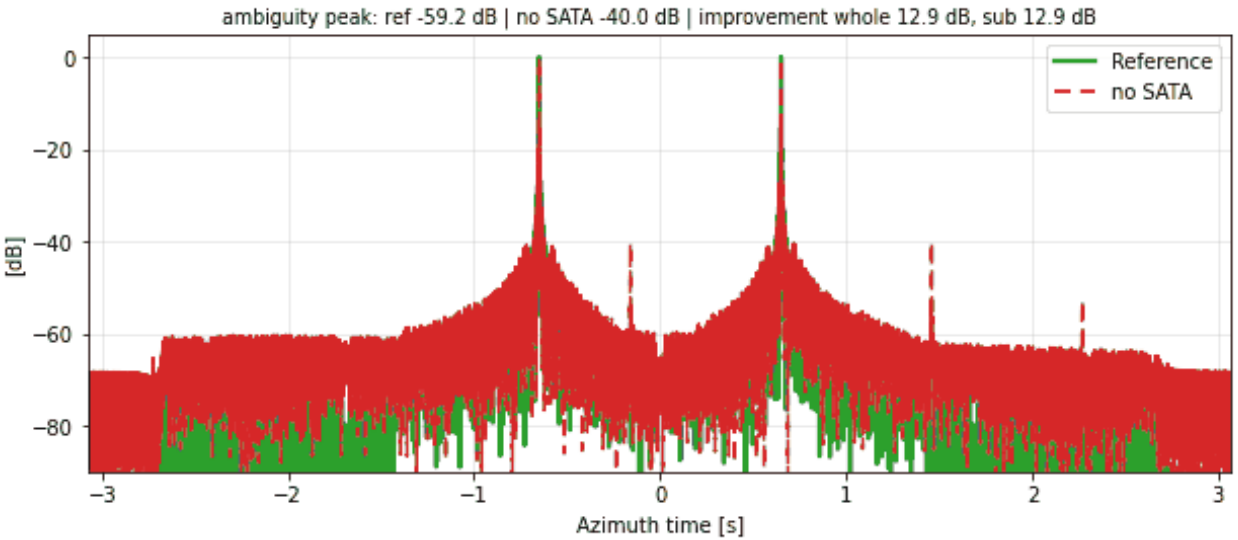



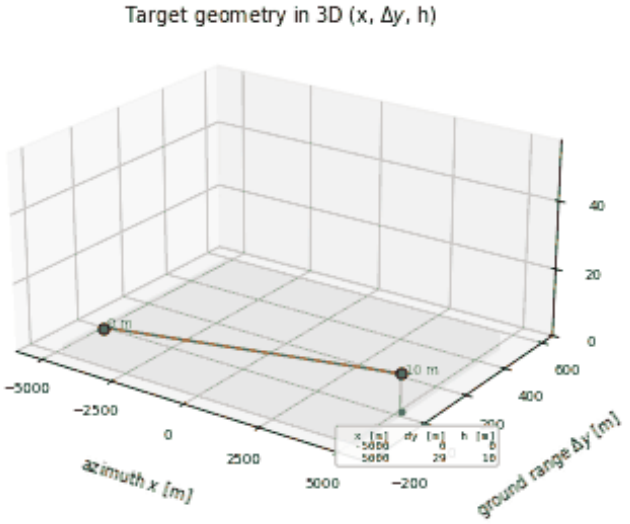



RA-LN-005 | SATA 1D | along-track ramp: N = 2, $\alpha = 3^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

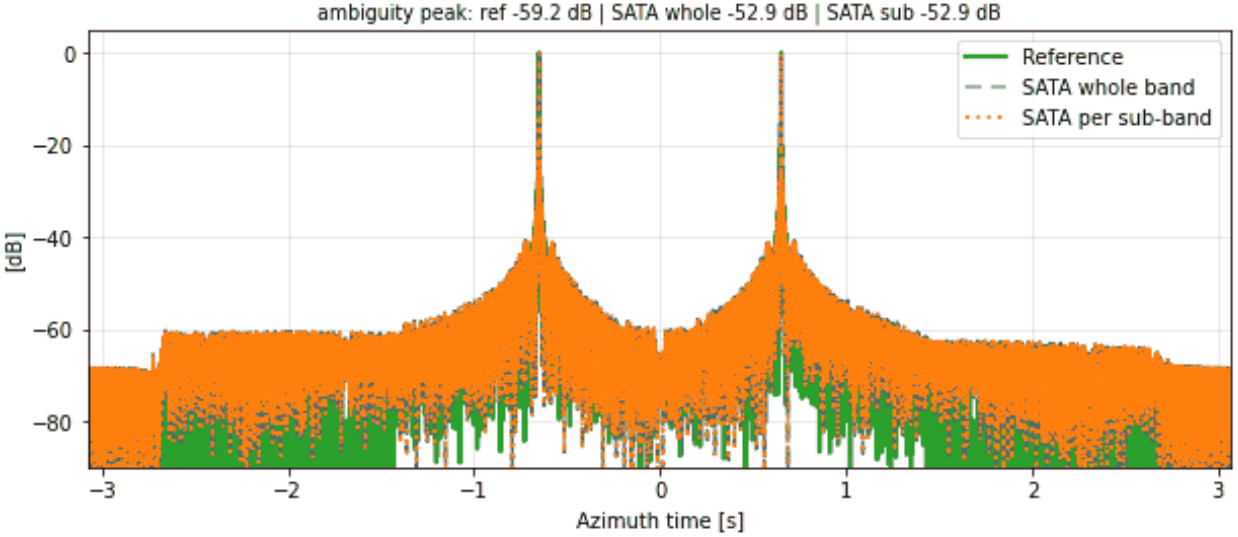

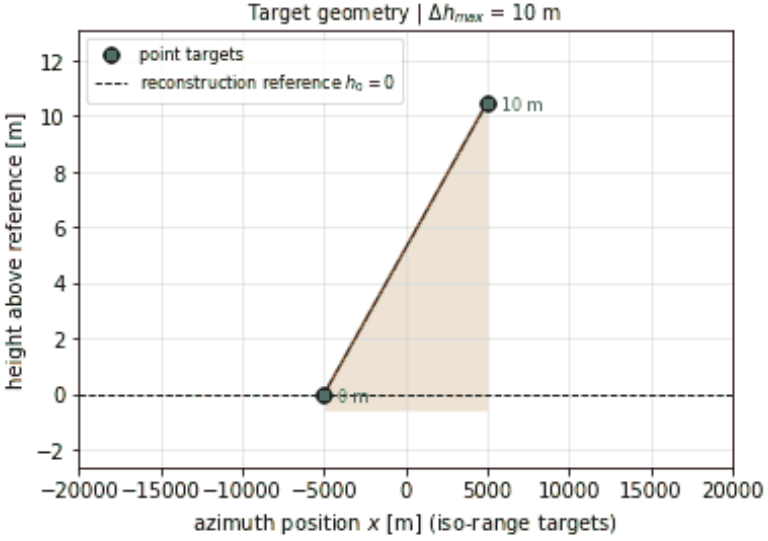



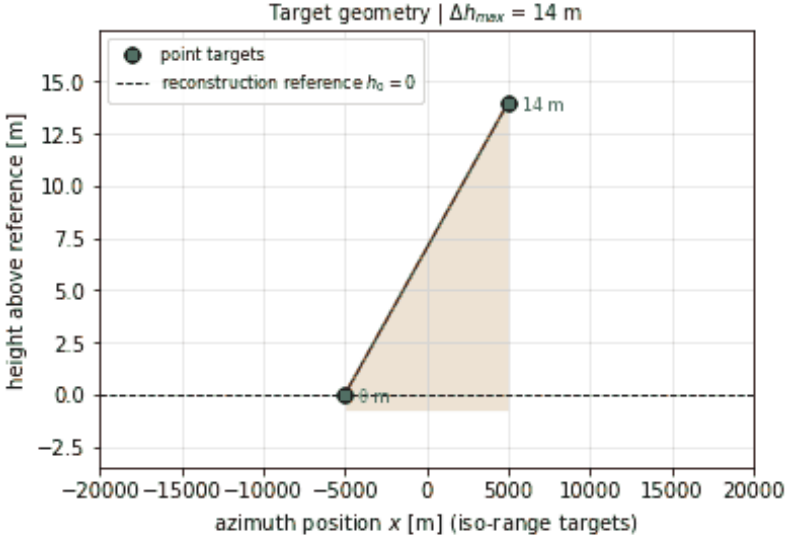



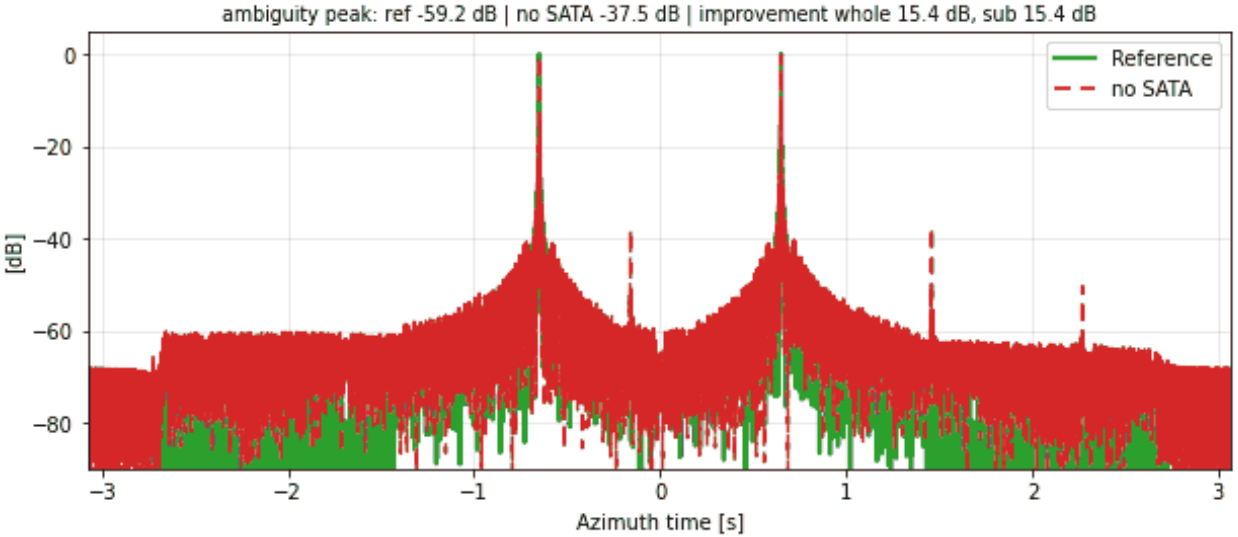



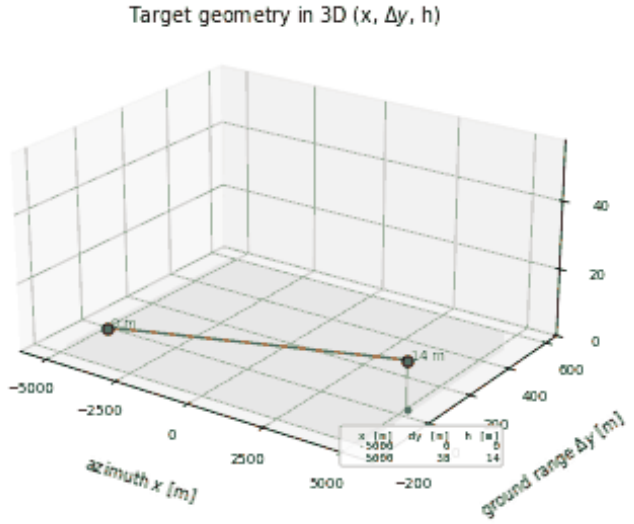

418

RA-LN-006 | SATA 1D | along-track ramp: N = 2, $\alpha = 4°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

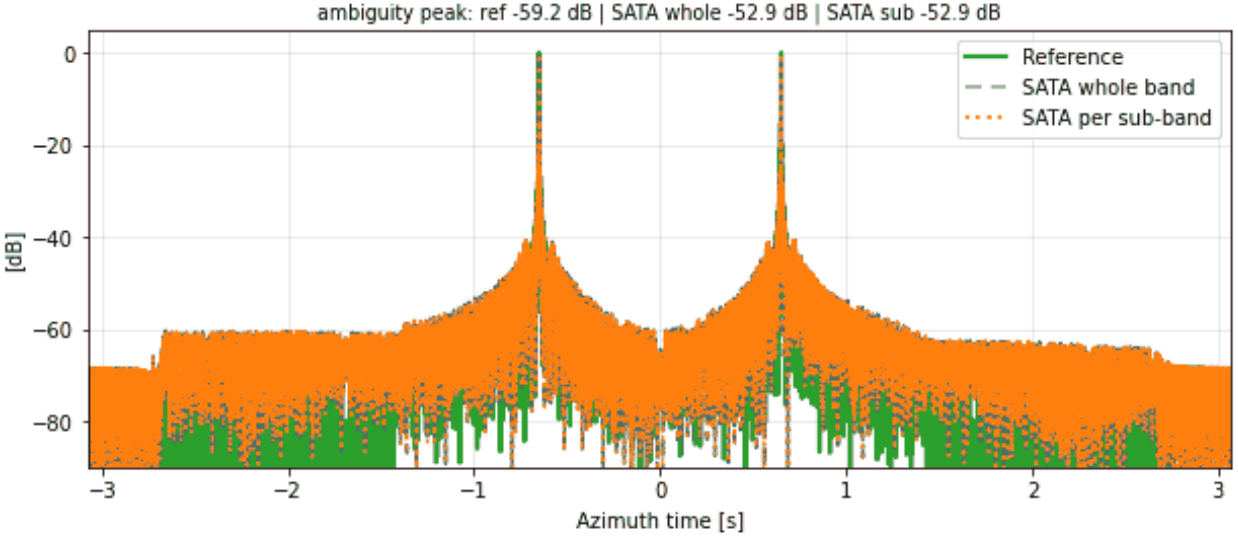






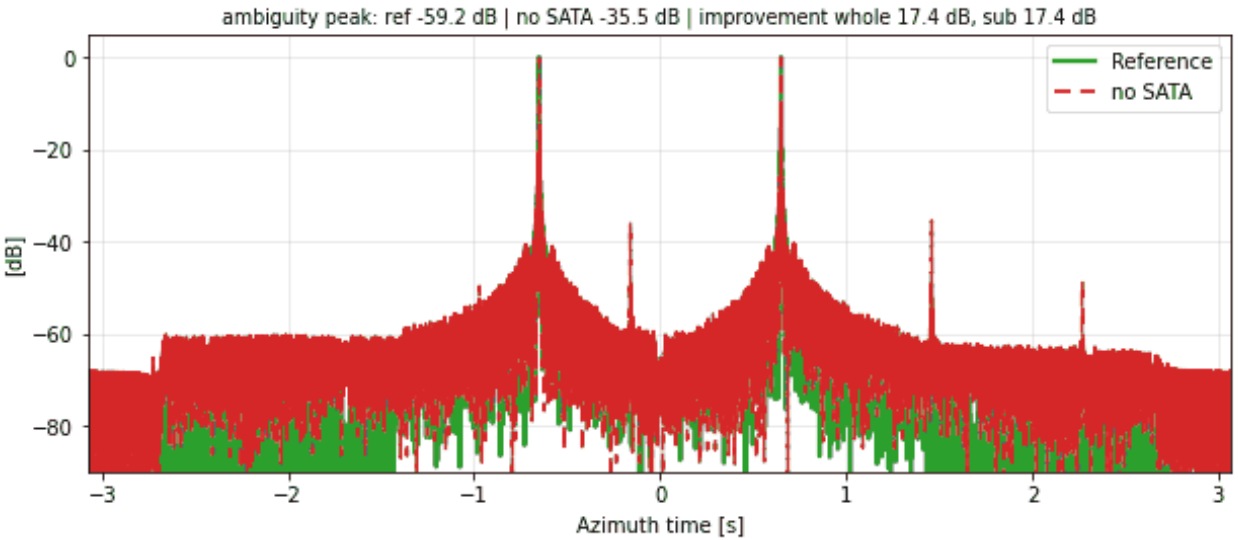



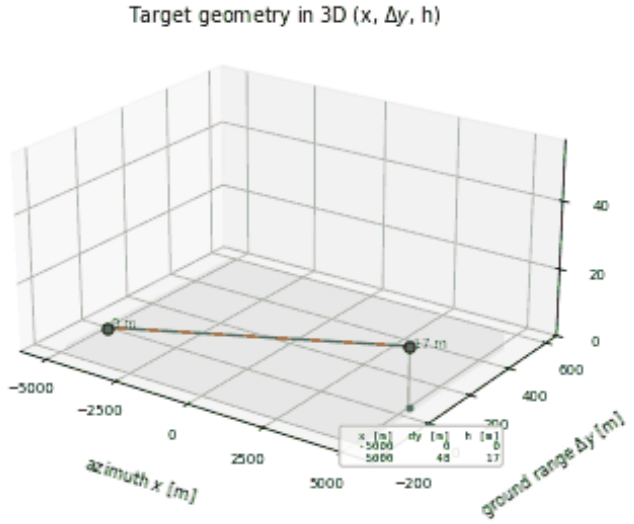



RA-LN-007 | SATA 1D | along-track ramp: N = 2, $\alpha = 5°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

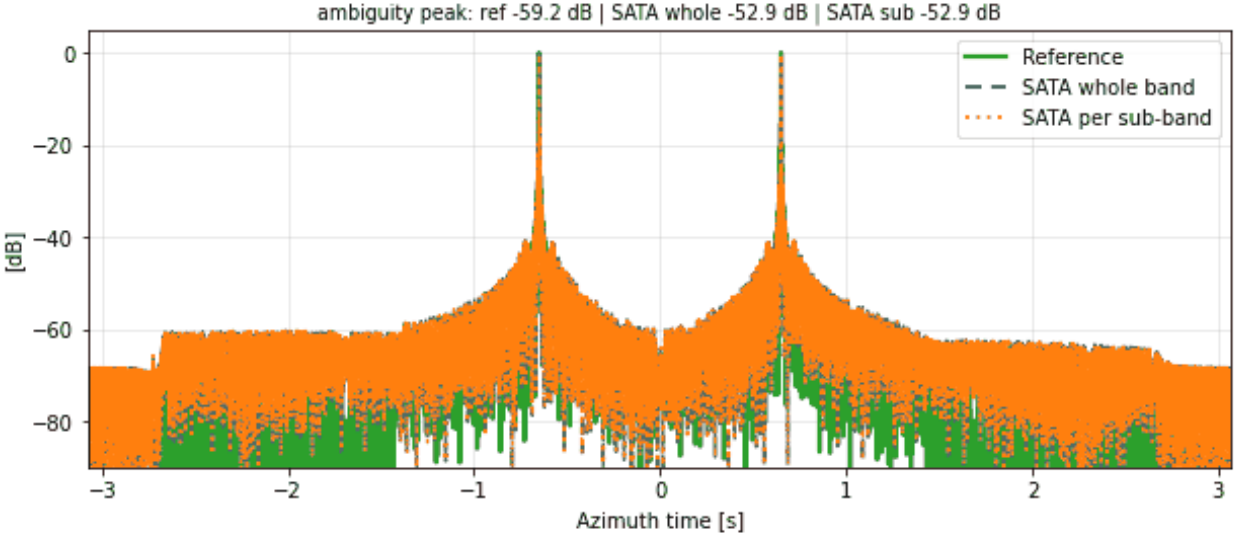


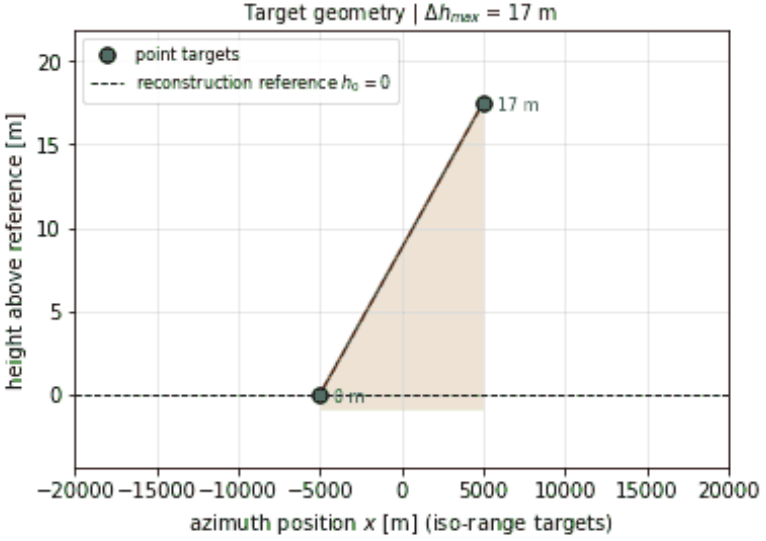



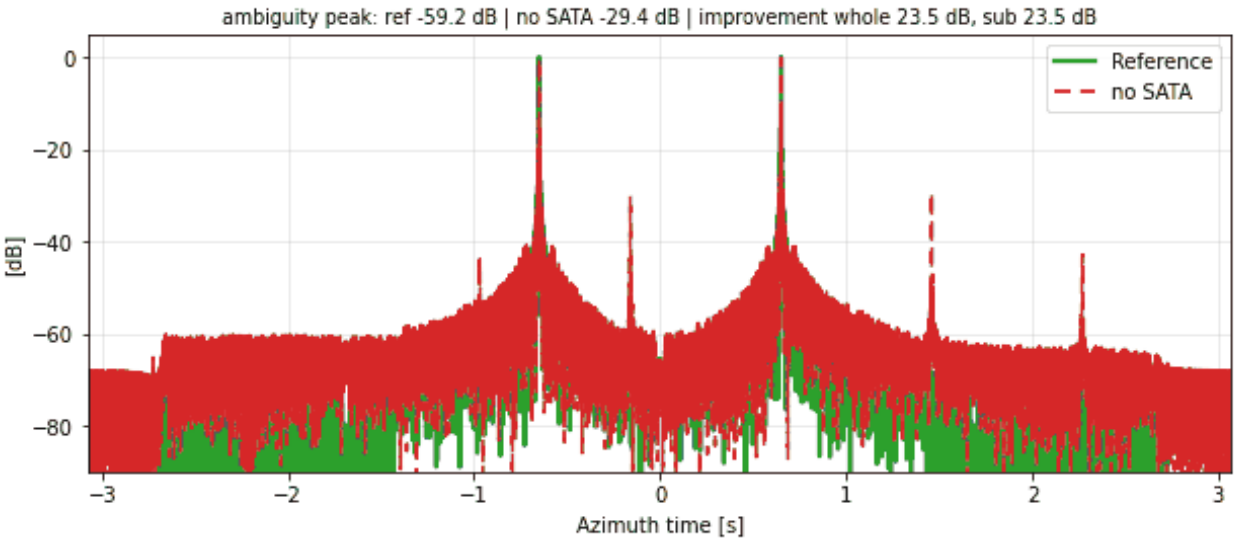



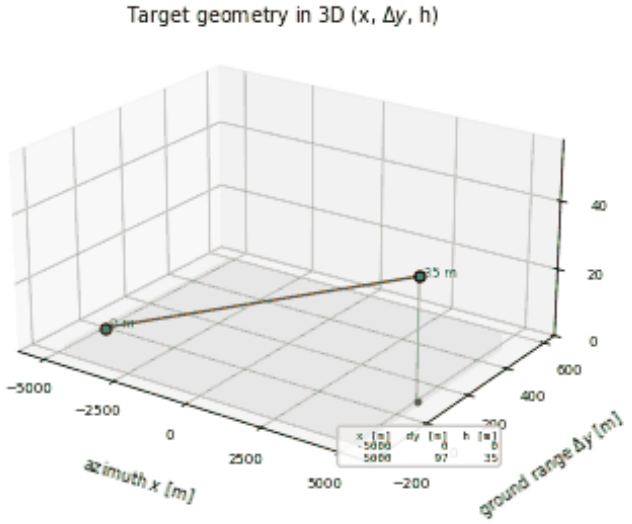



RA-LN-008 | SATA 1D | along-track ramp: N = 2, $\alpha = 10^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

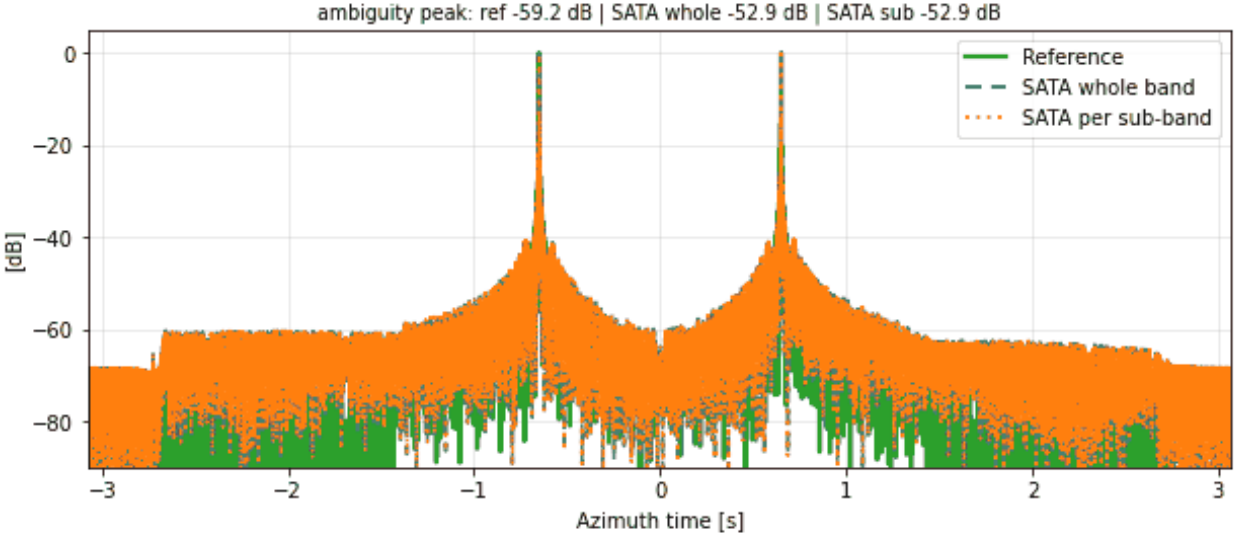


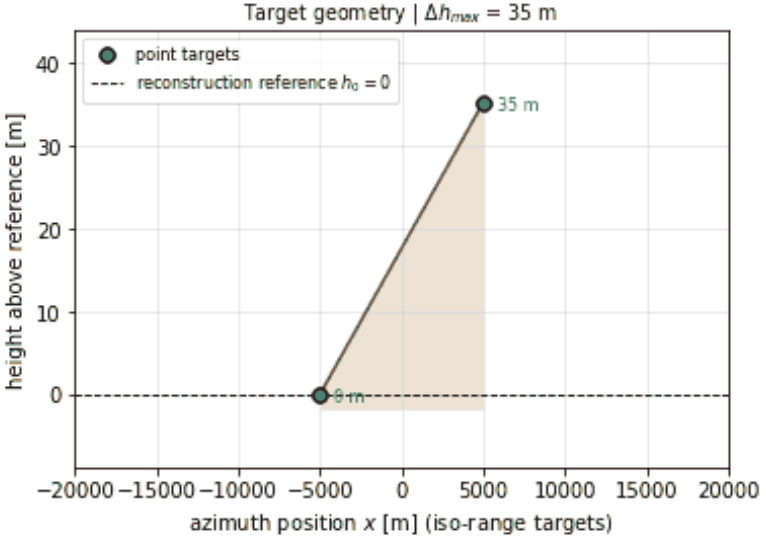



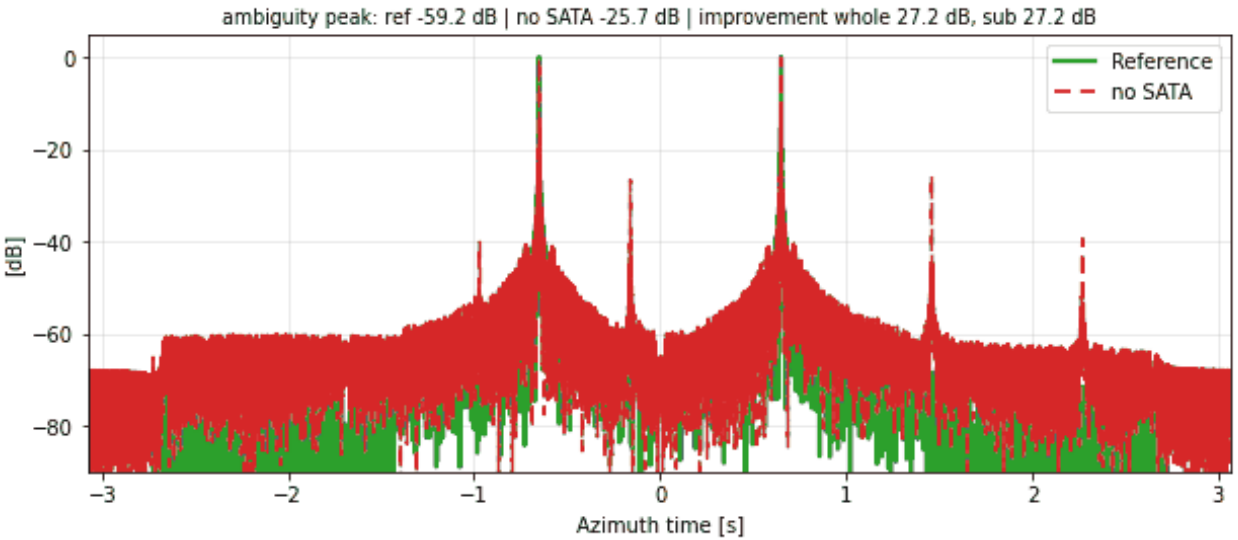



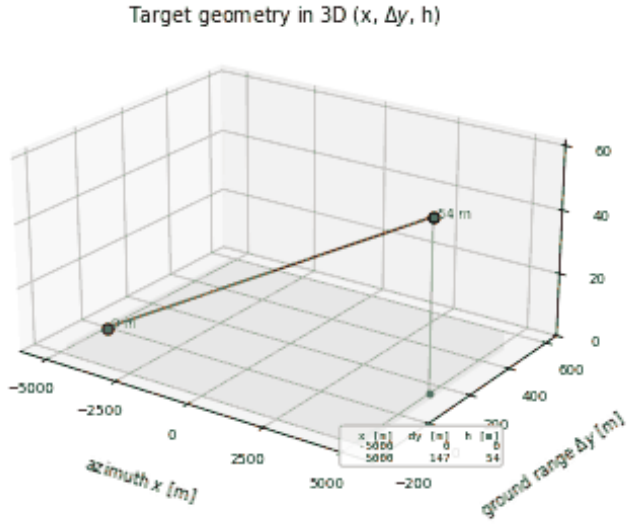



RA-LN-009 | SATA 1D | along-track ramp: N = 2, $\alpha = 15^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

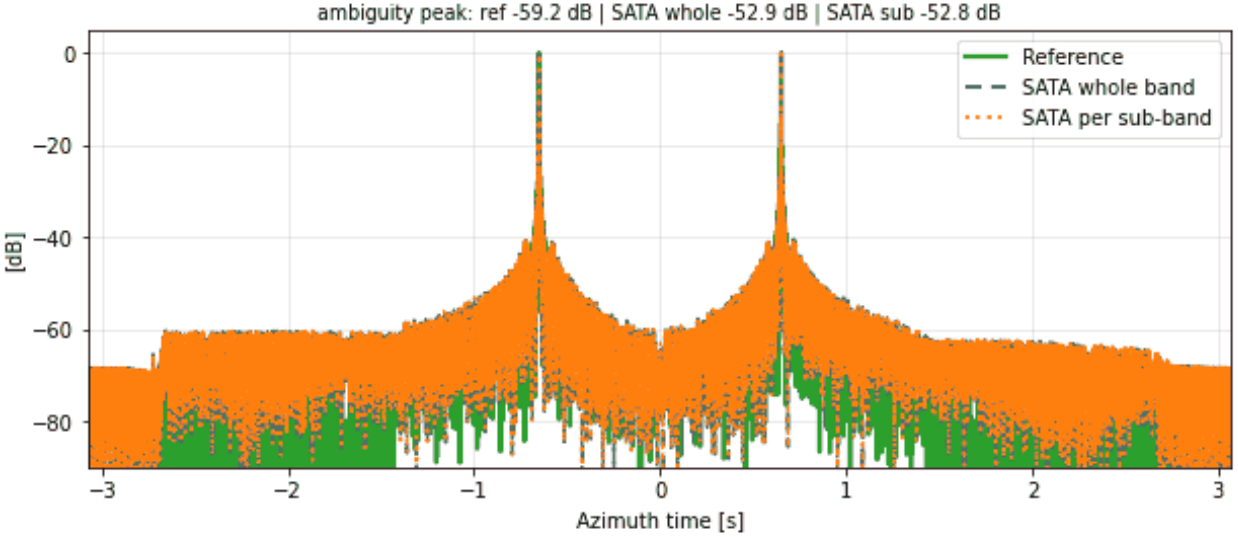


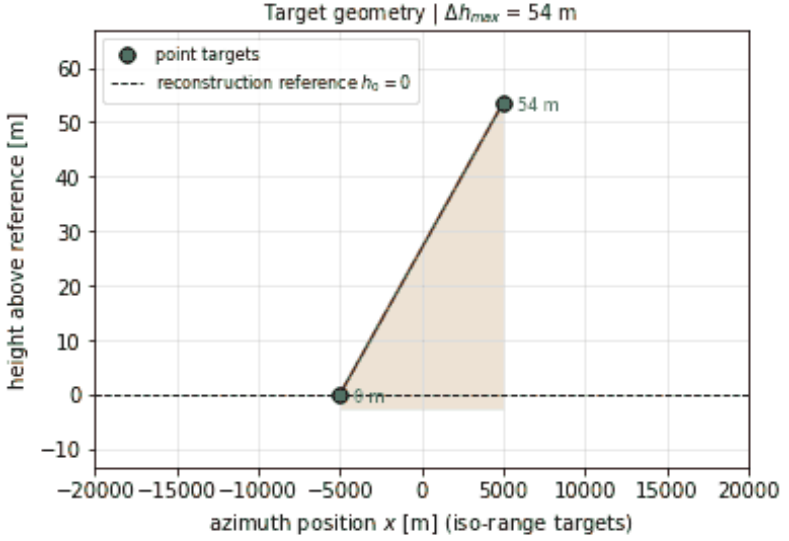



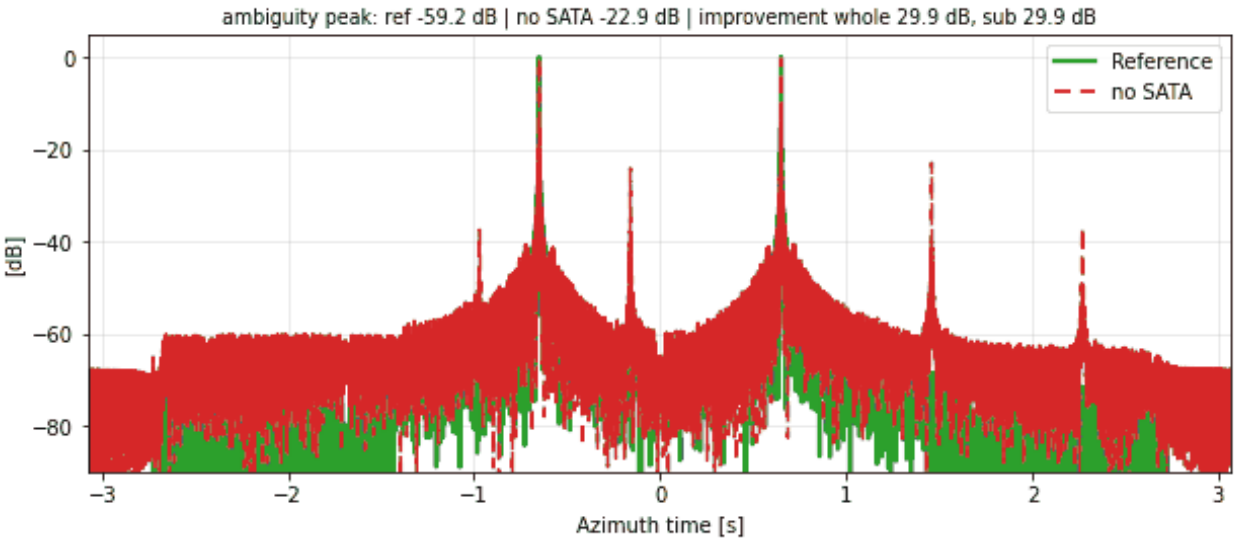



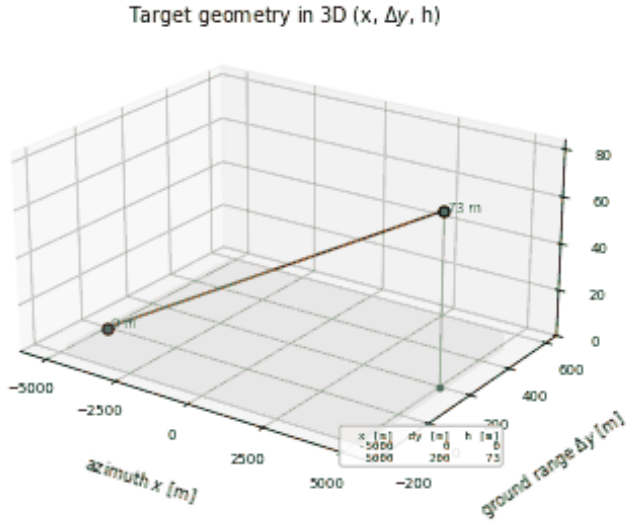



RA-LN-010 | SATA 1D | along-track ramp: N = 2, $\alpha = 20°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

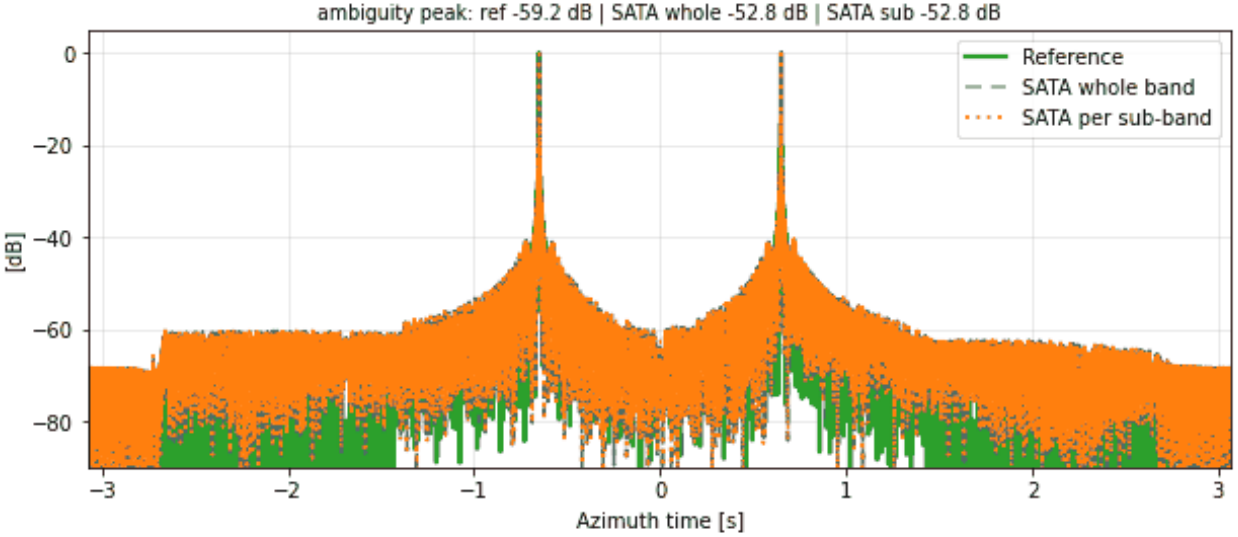


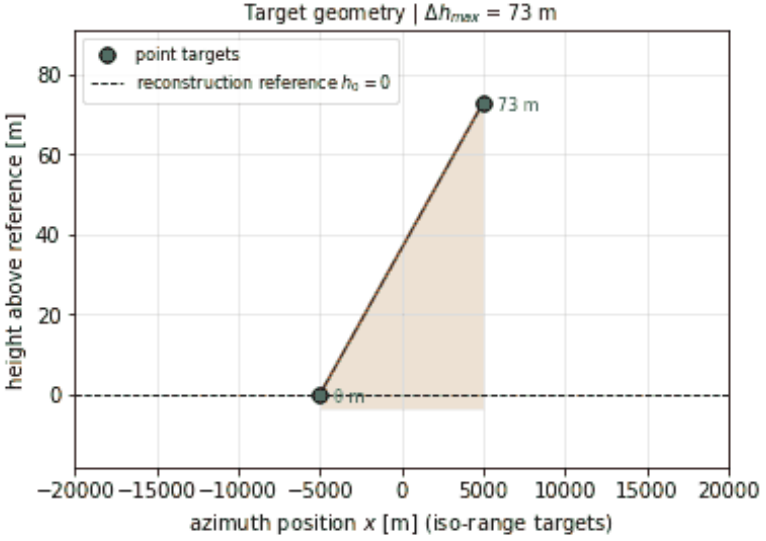



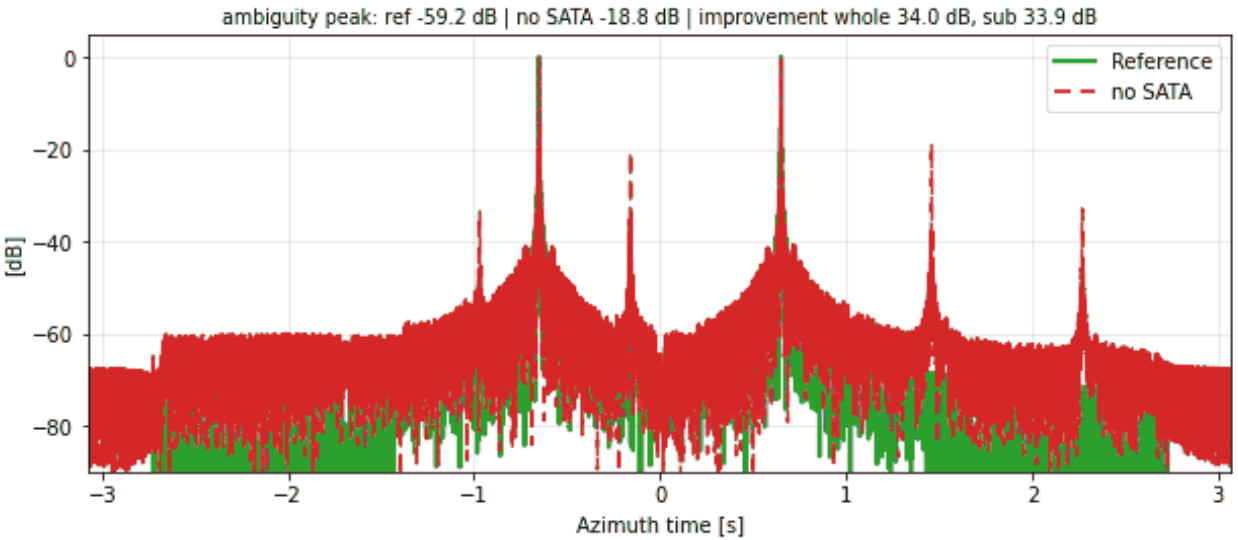



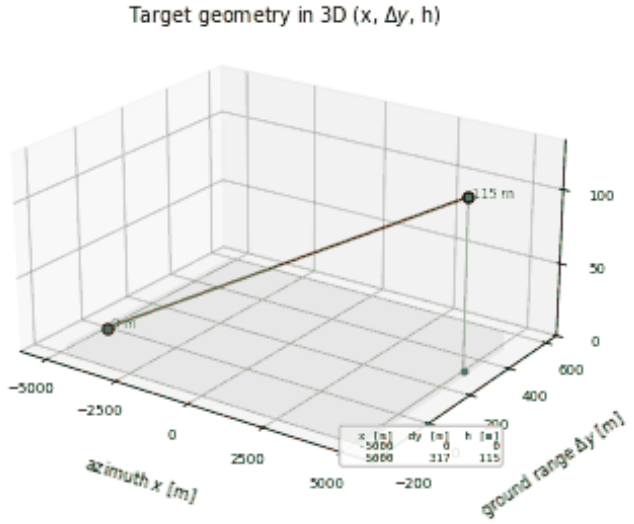



RA-LN-011 | SATA 1D | along-track ramp: N = 2, $\alpha = 30^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

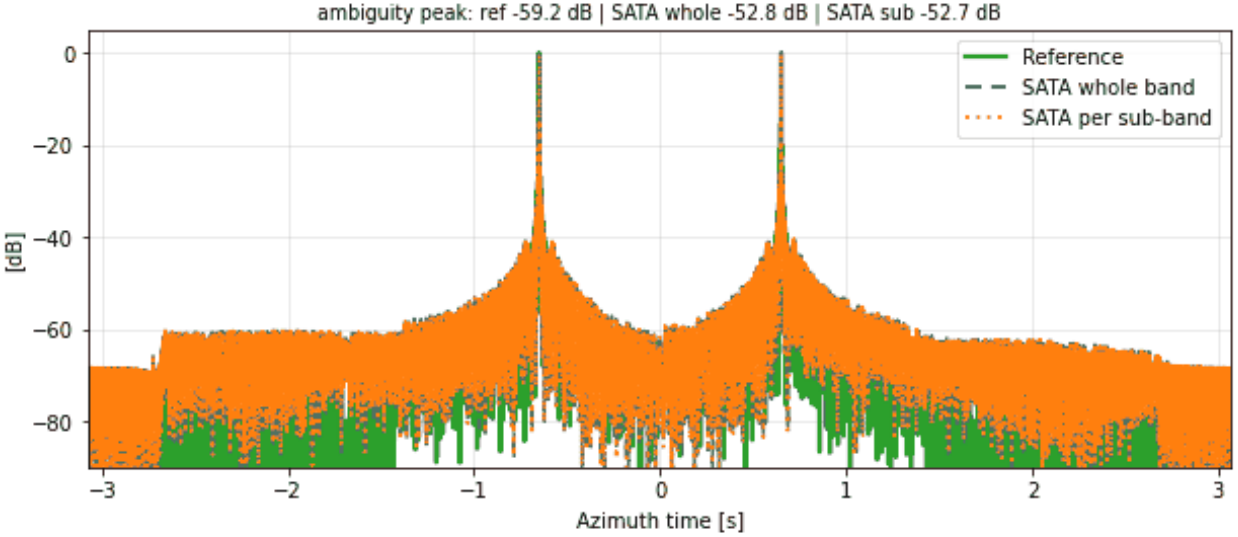


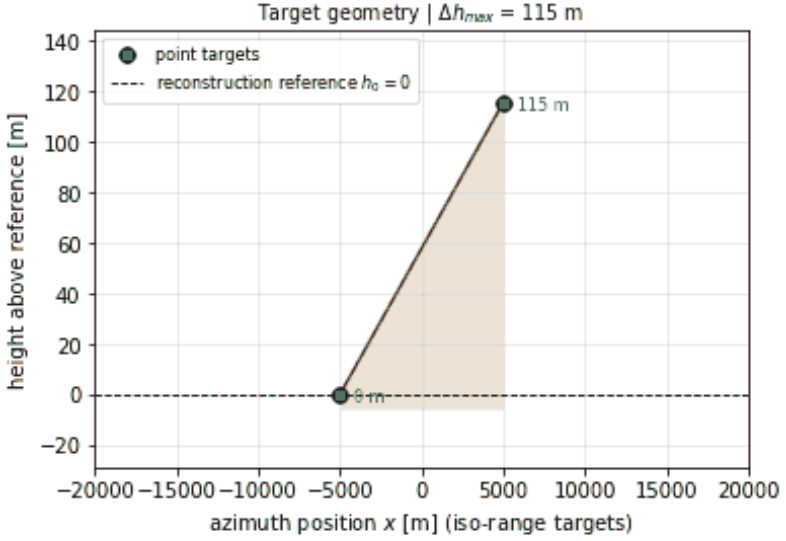



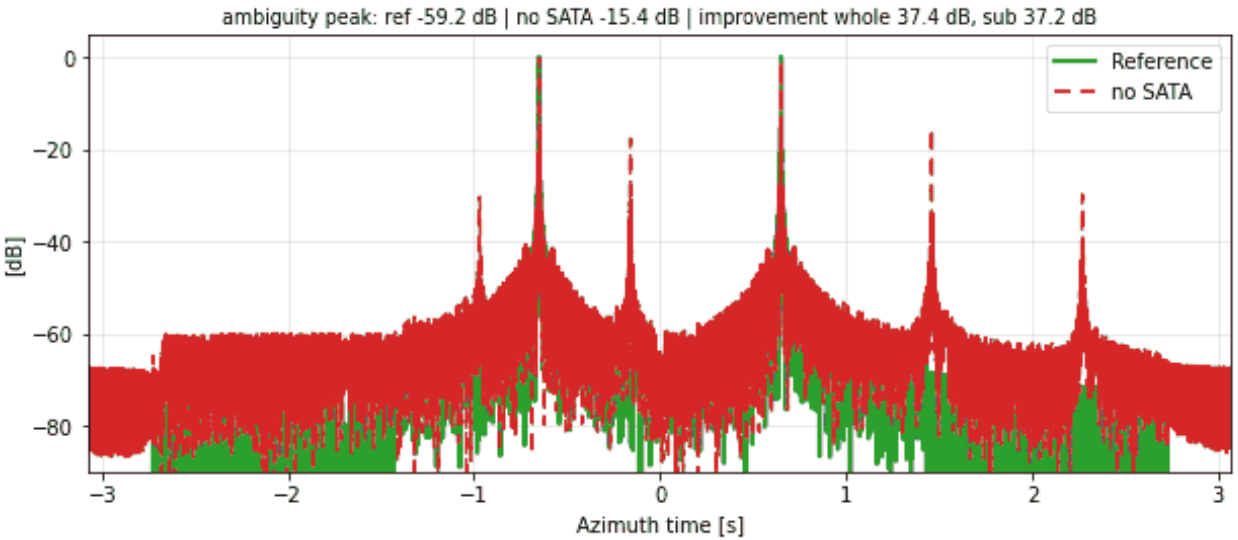



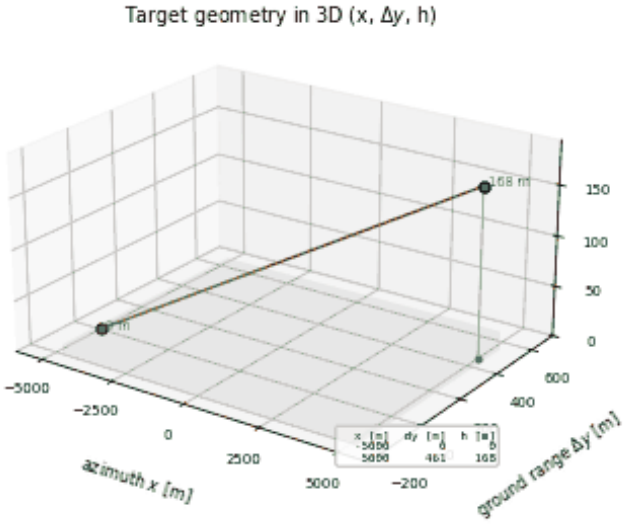



RA-LN-012 | SATA 1D | along-track ramp: N = 2, $\alpha = 40^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

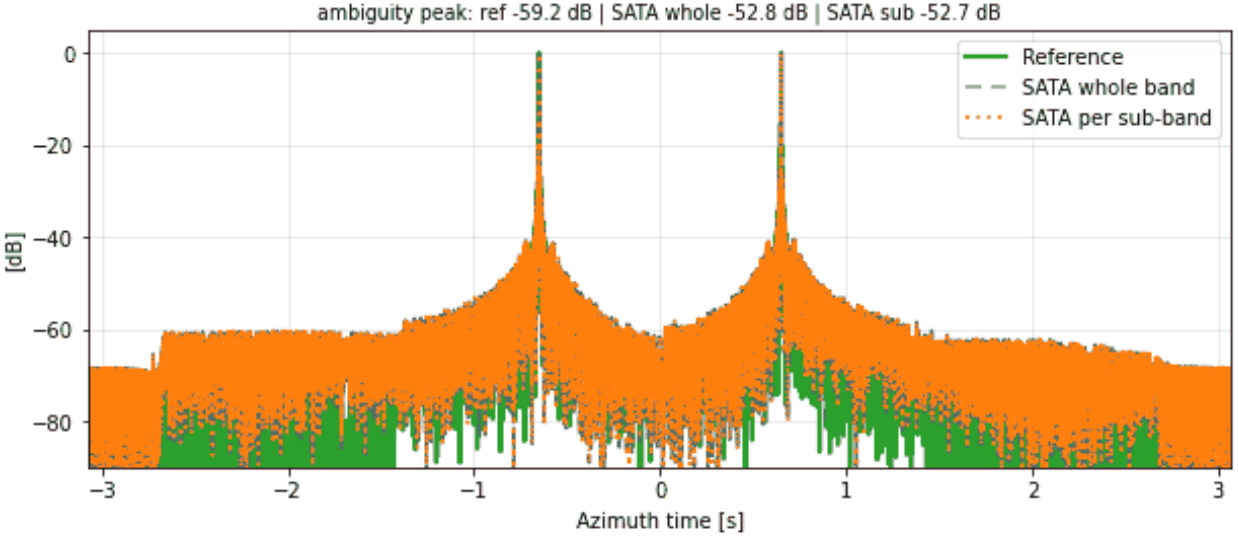

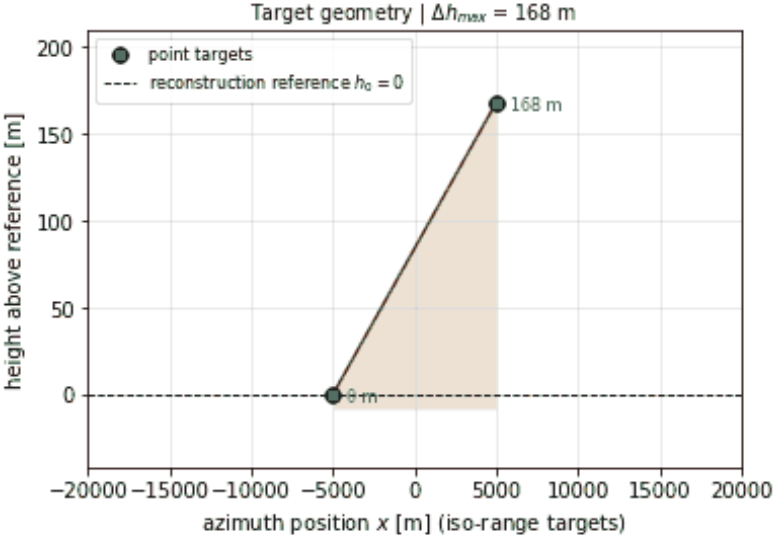



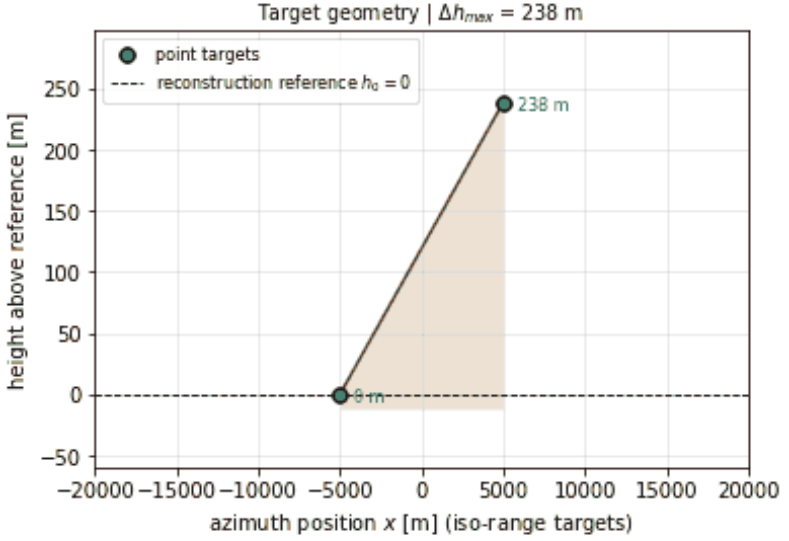



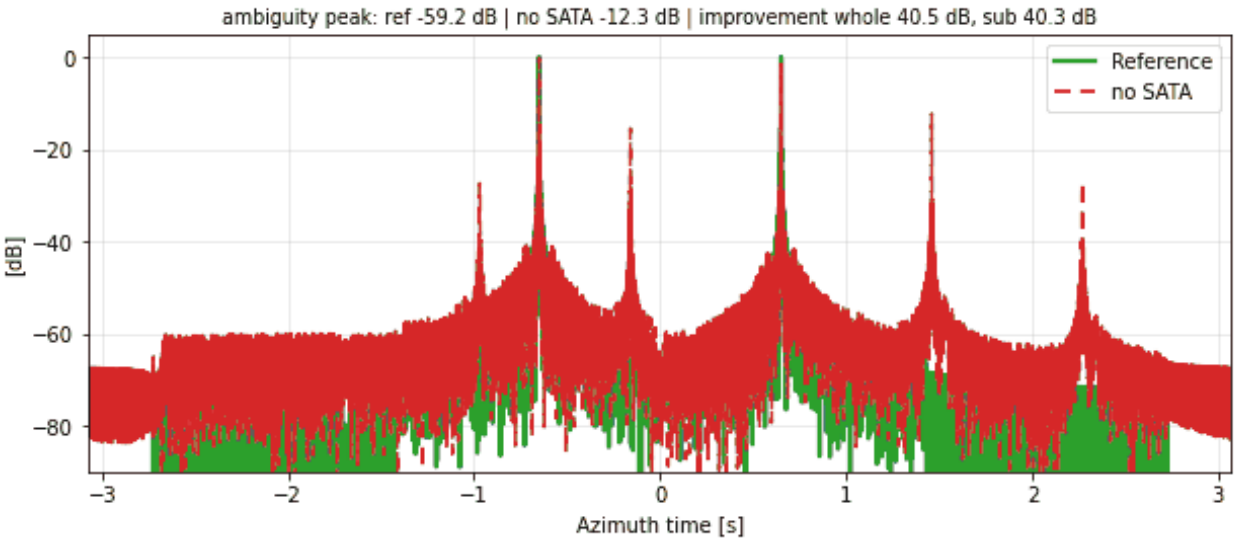



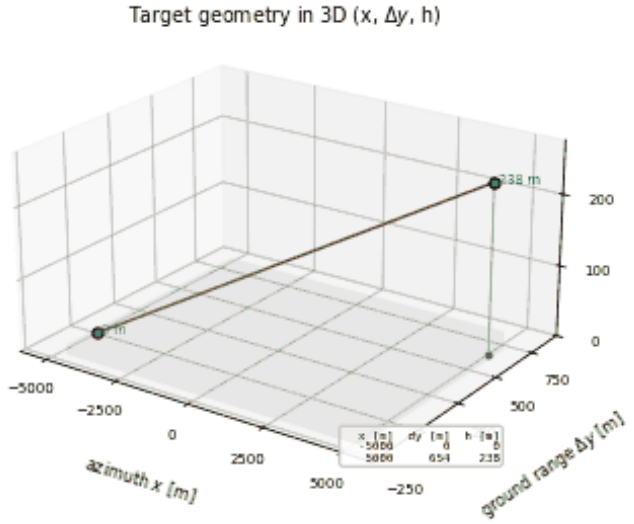

425

RA-LN-013 | SATA 1D | along-track ramp: N = 2, $\alpha = 50°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

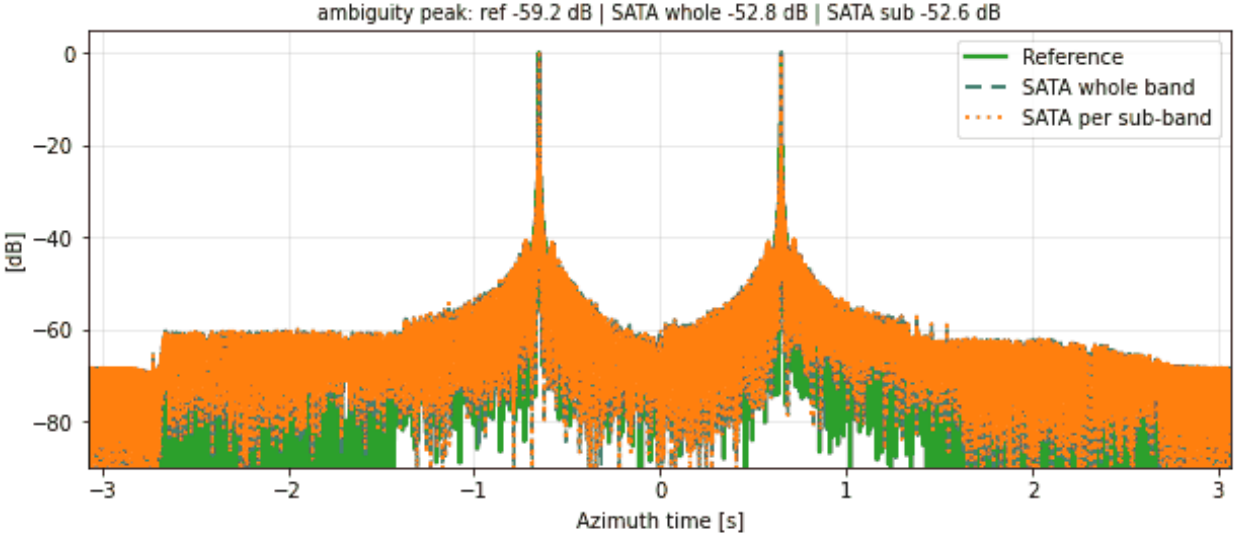






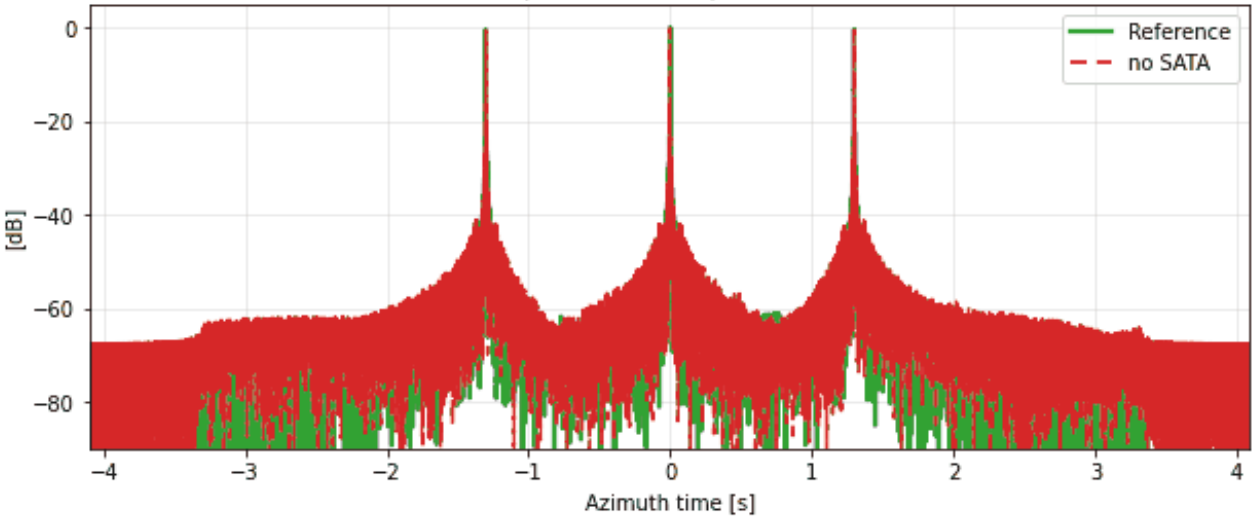



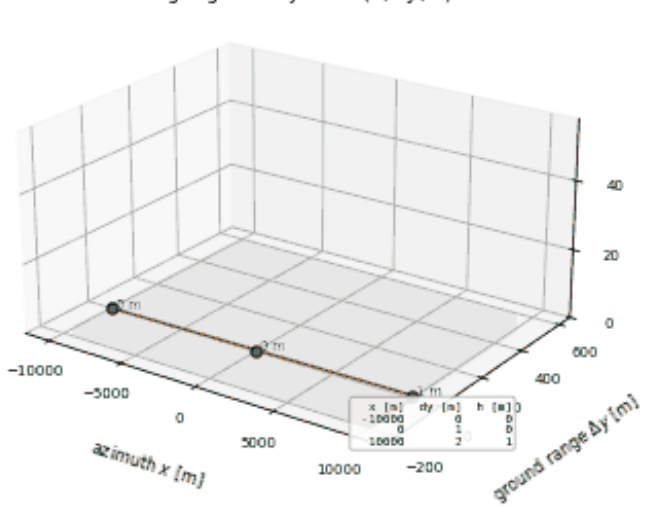



RA-LN-014 | SATA 1D | along-track ramp: N = 3, $\alpha = 0.1^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

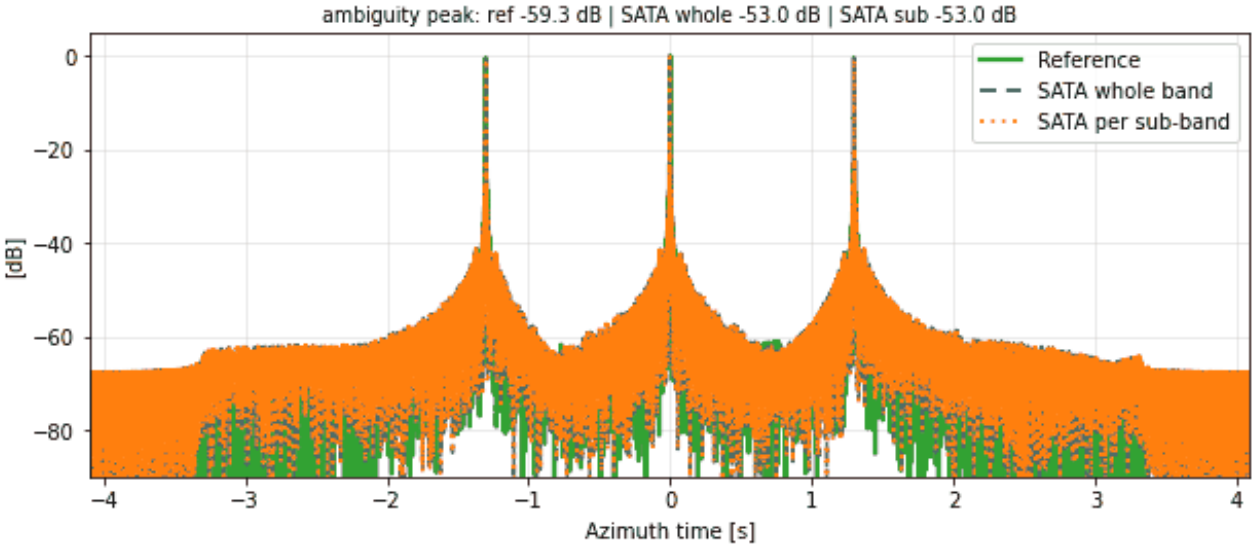


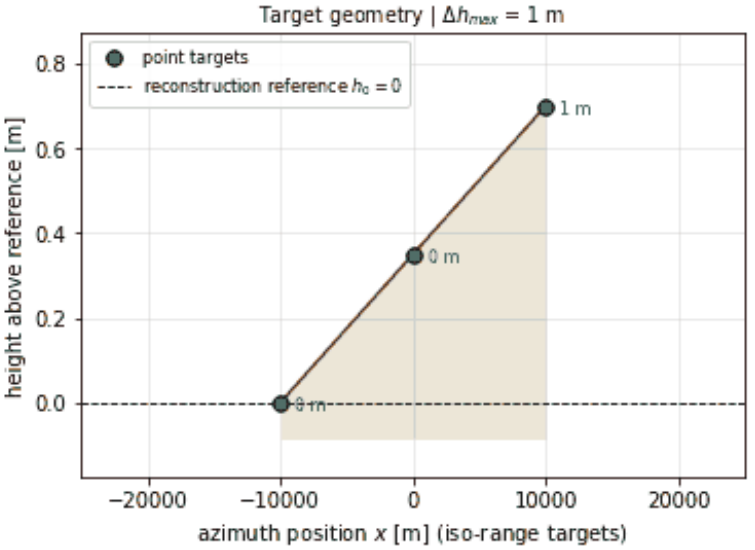



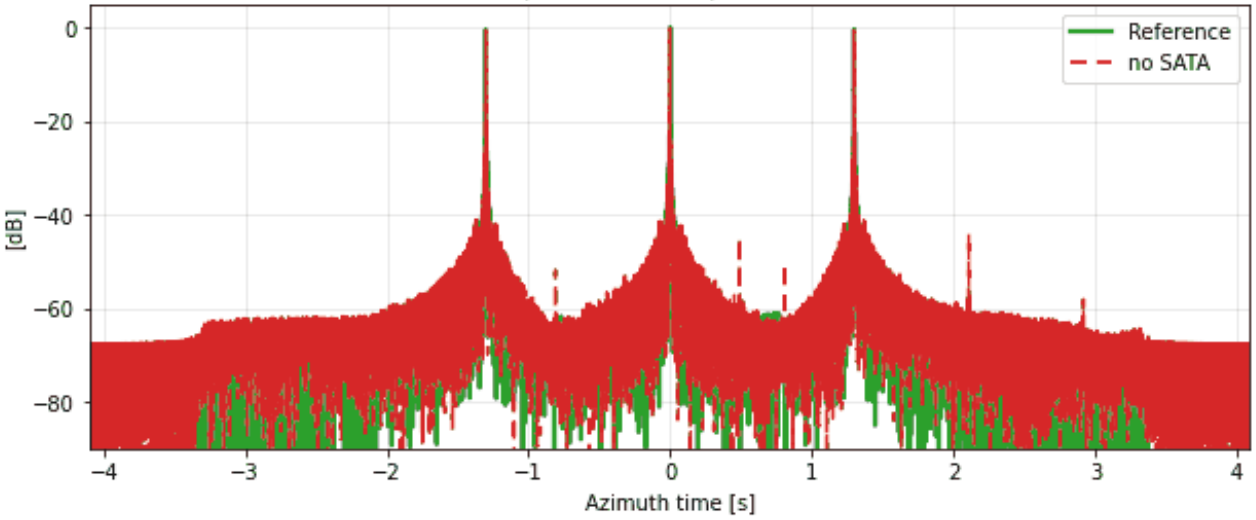



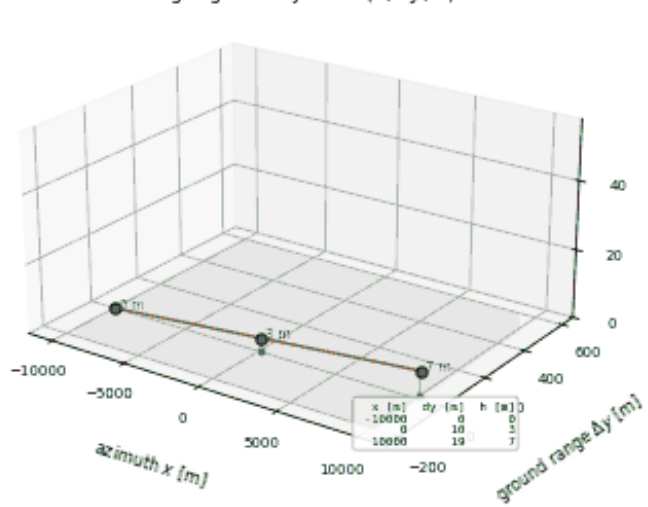



RA-LN-015 | SATA 1D | along-track ramp: N = 3, $\alpha = 1°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

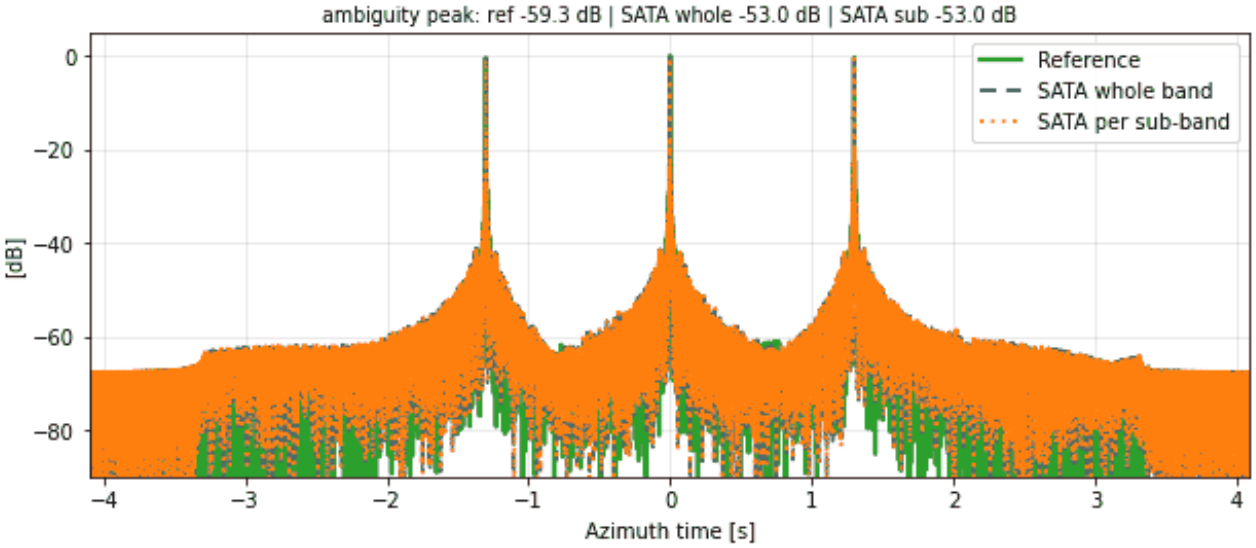


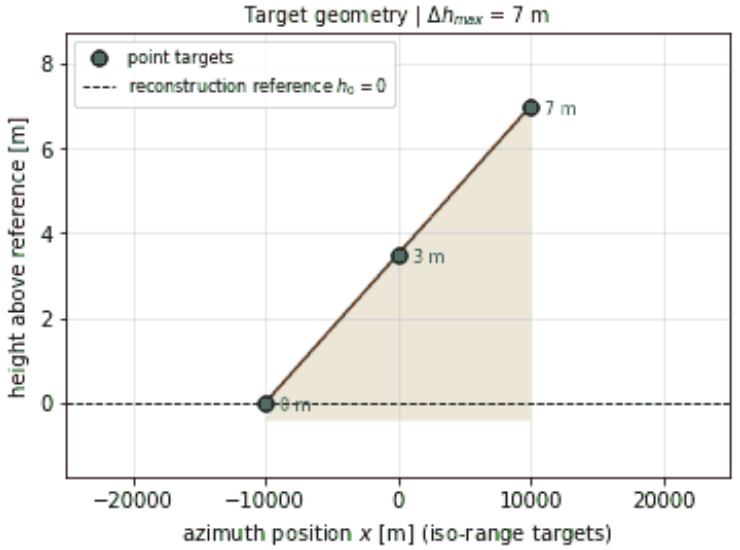



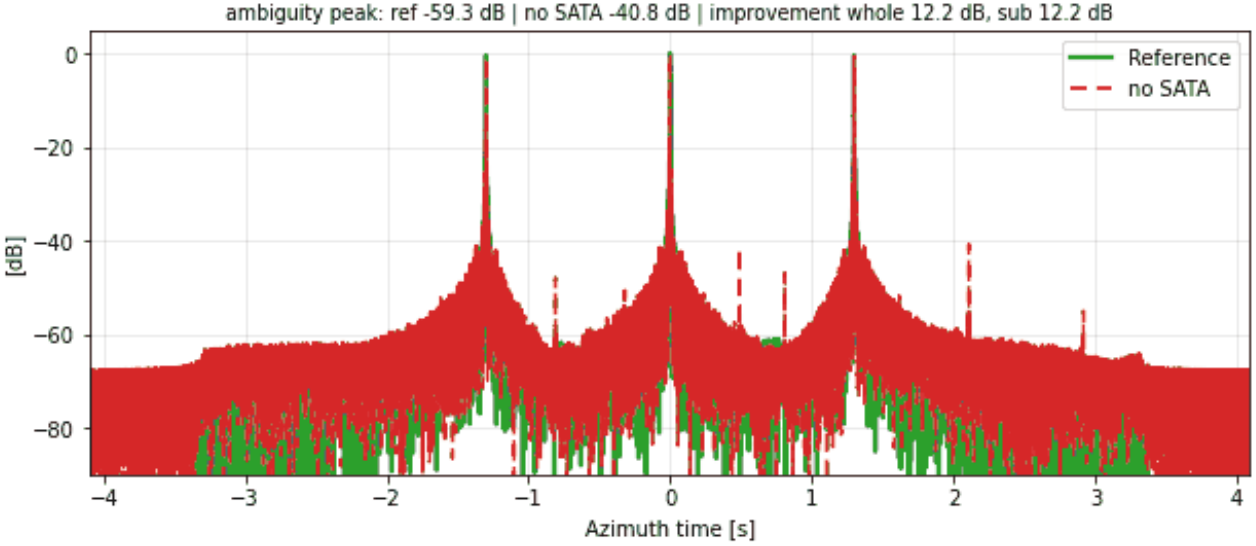



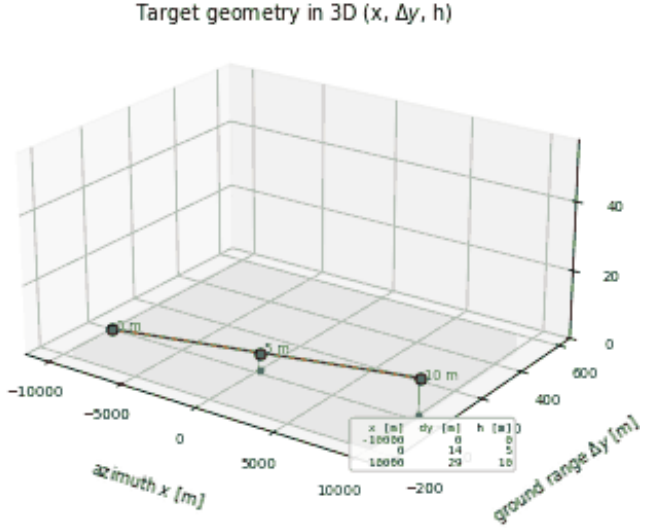



RA-LN-016 | SATA 1D | along-track ramp: N = 3, $\alpha = 1.5^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

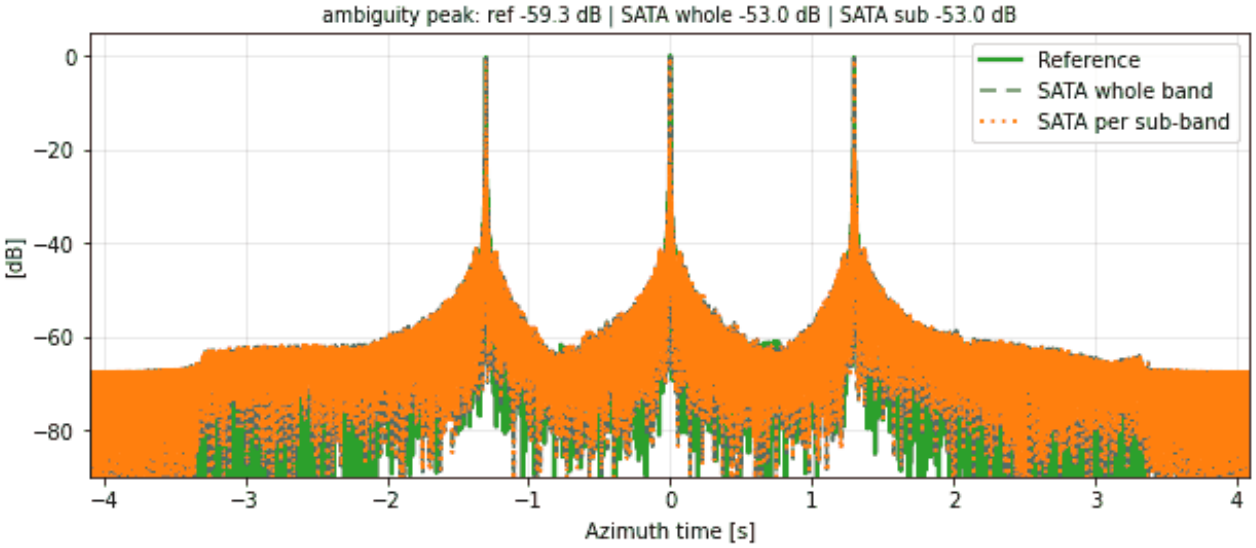


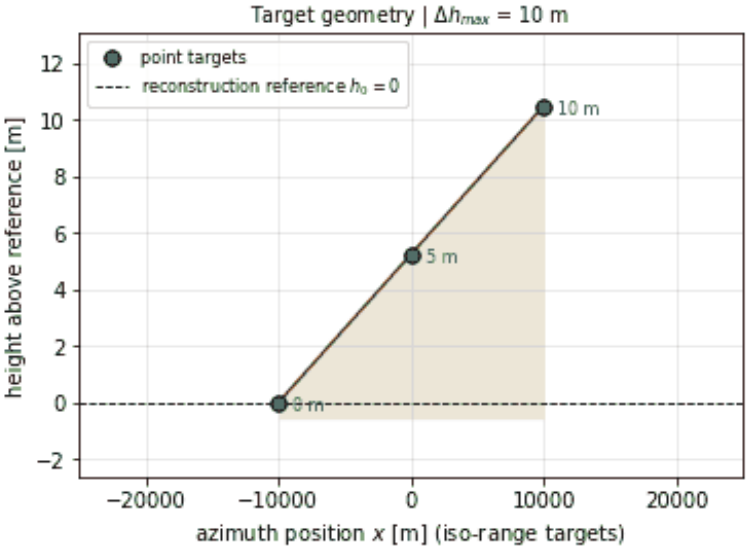



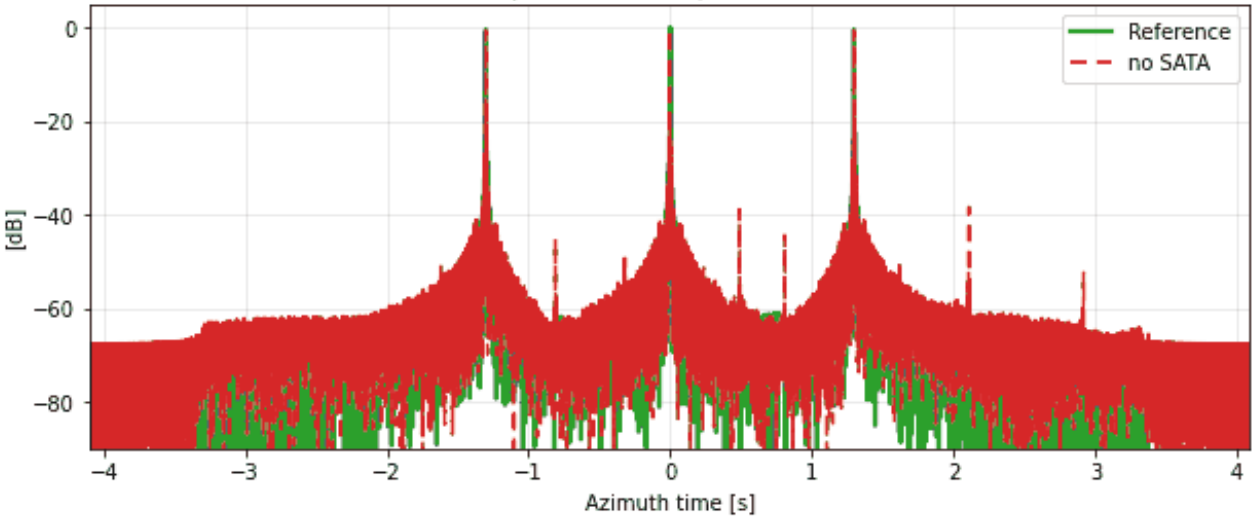



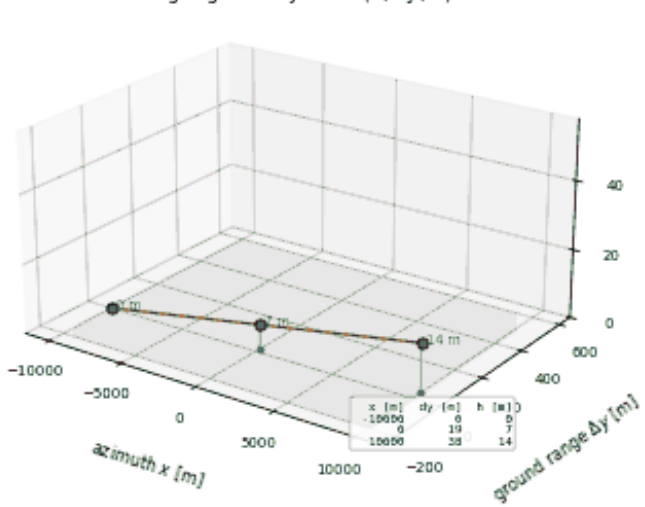



RA-LN-017 | SATA 1D | along-track ramp: N = 3, $\alpha = 2°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

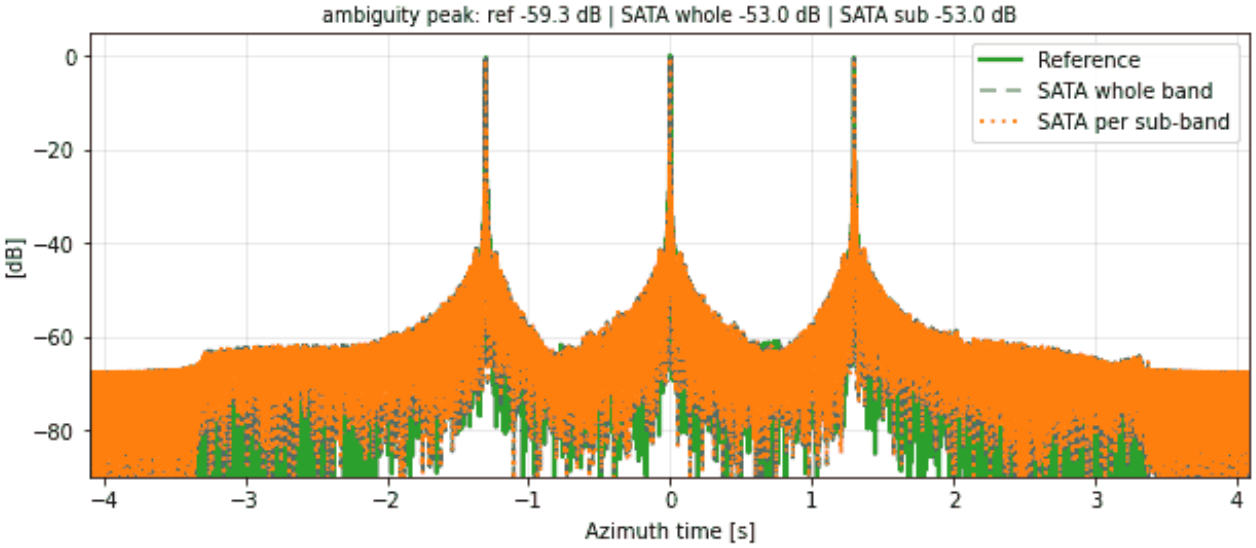

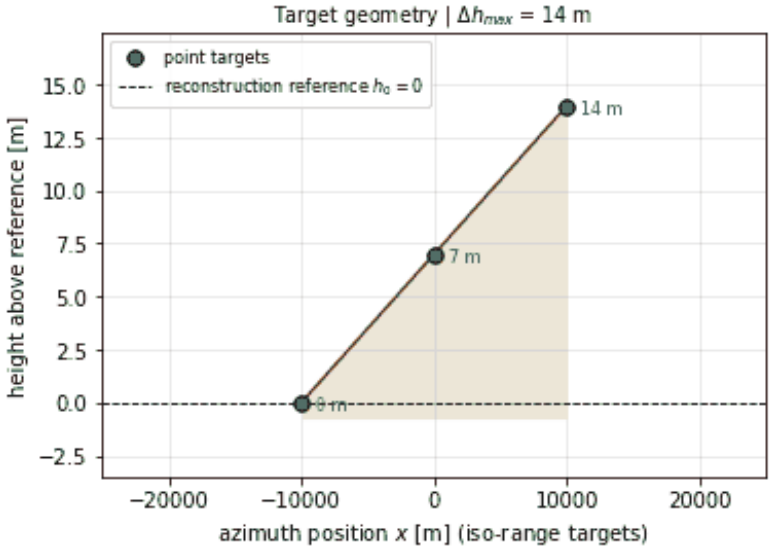



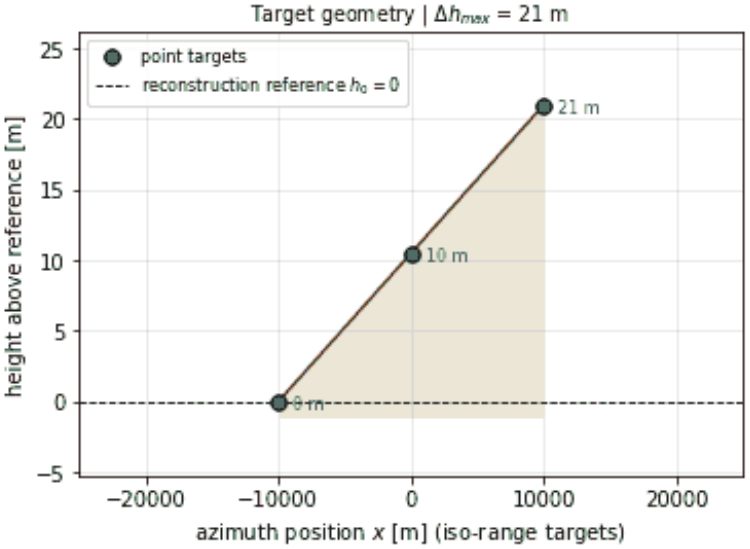



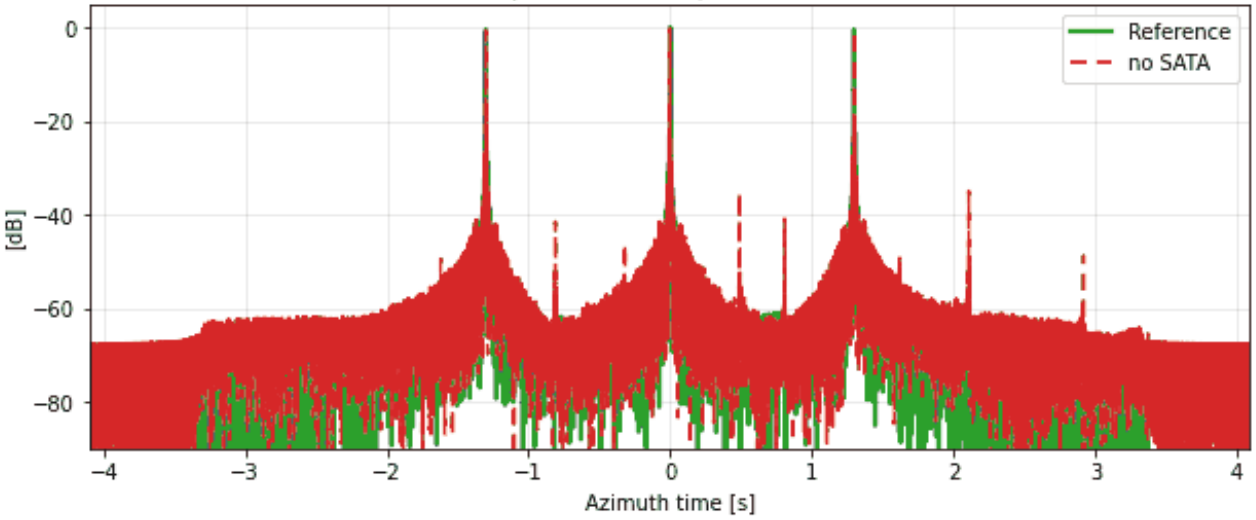



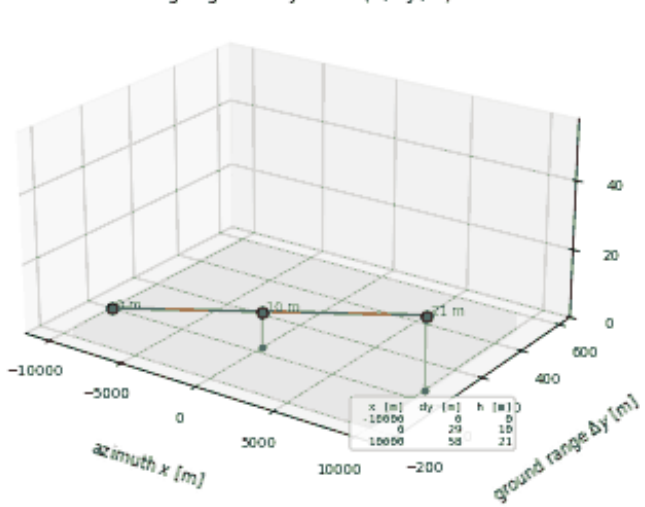
RA-LN-018 | SATA 1D | along-track ramp: N = 3, $\alpha = 3°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

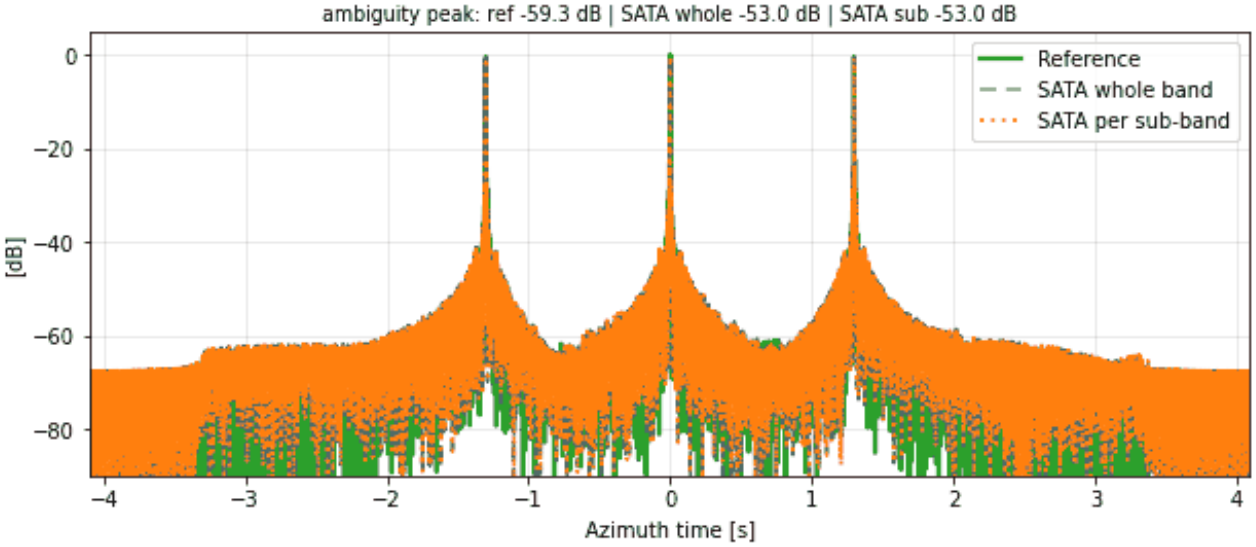






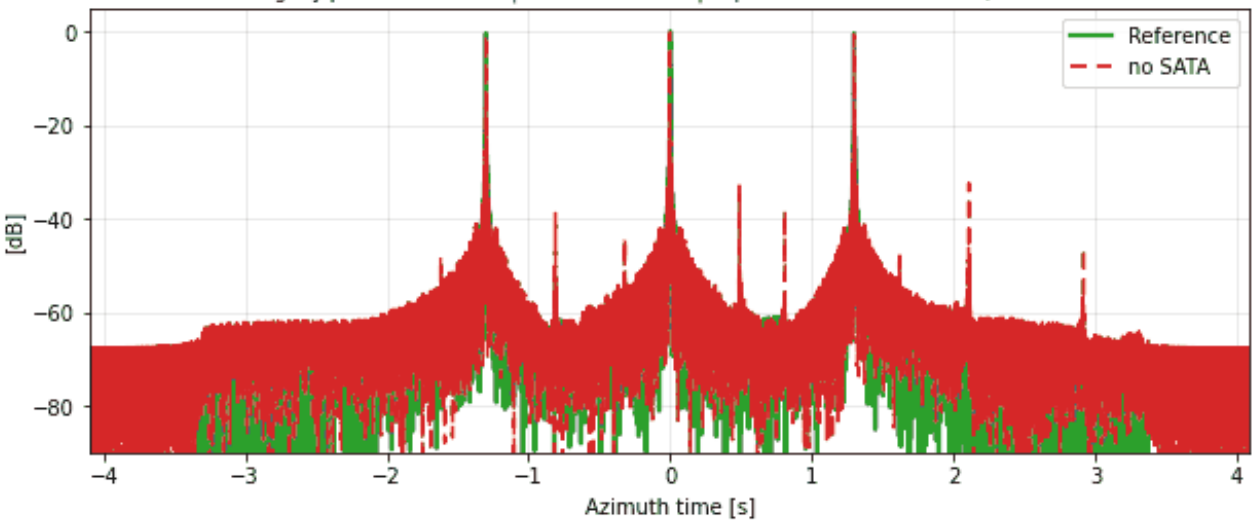



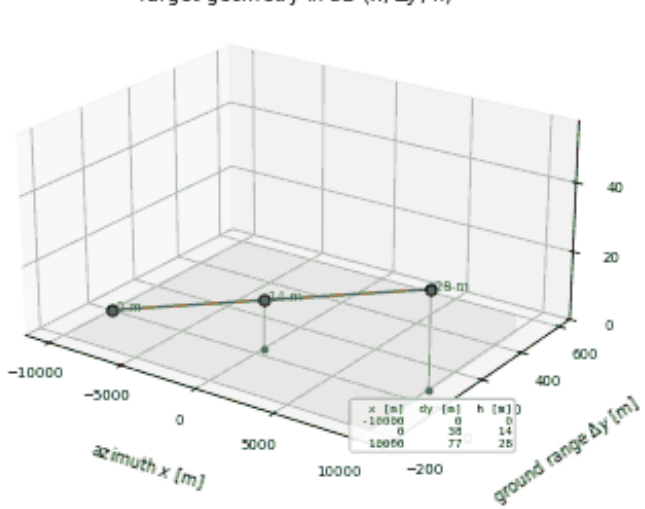



RA-LN-019 | SATA 1D | along-track ramp: N = 3, $\alpha = 4°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

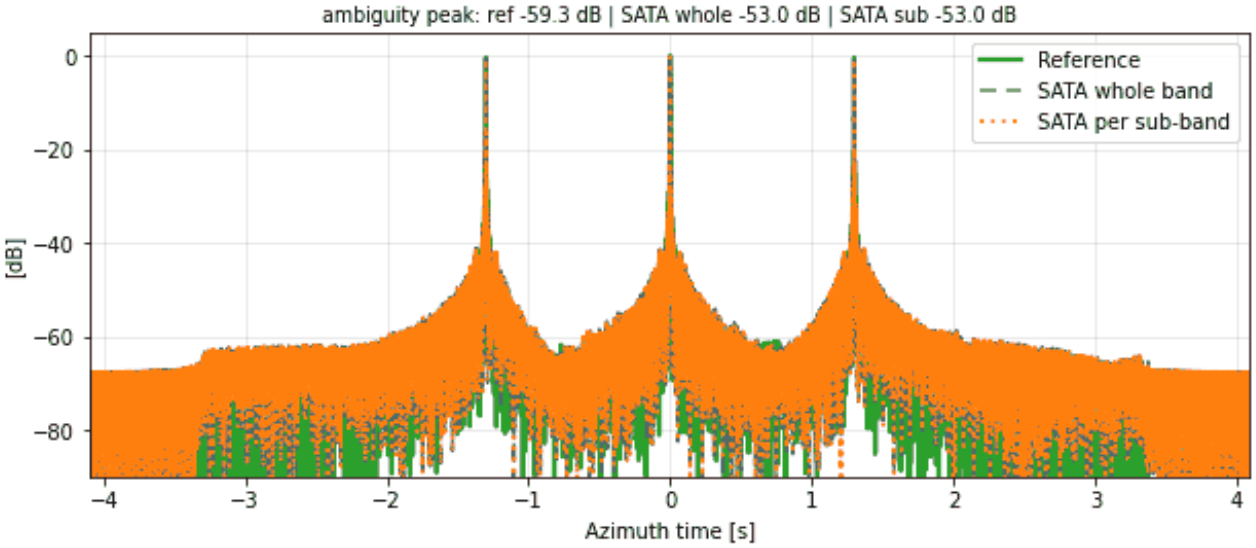


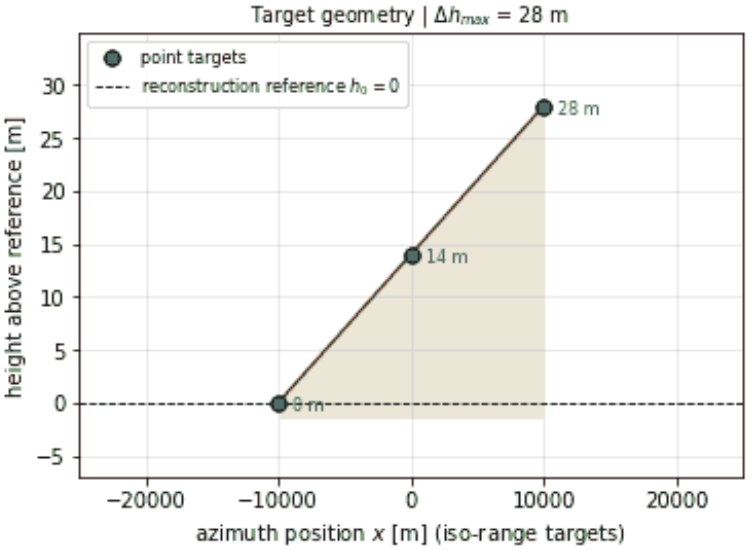



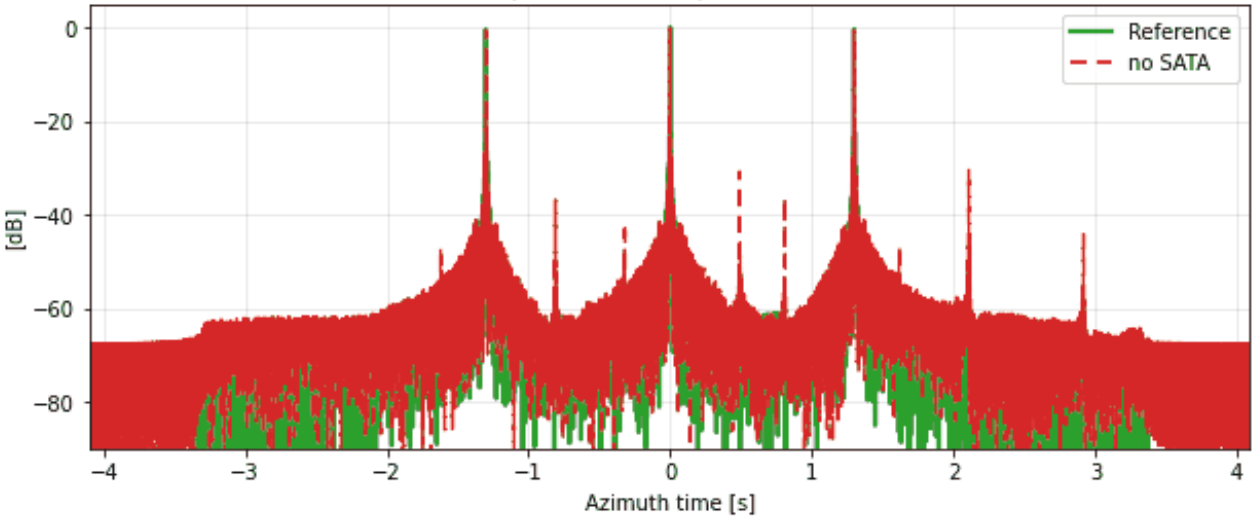



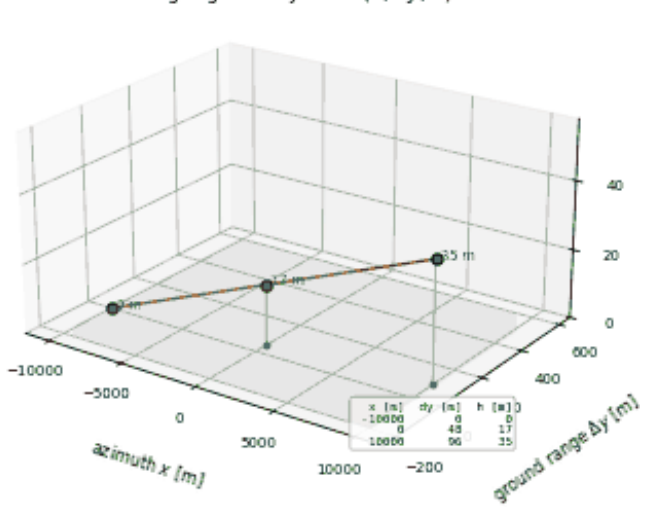



RA-LN-020 | SATA 1D | along-track ramp: N = 3, $\alpha = 5°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

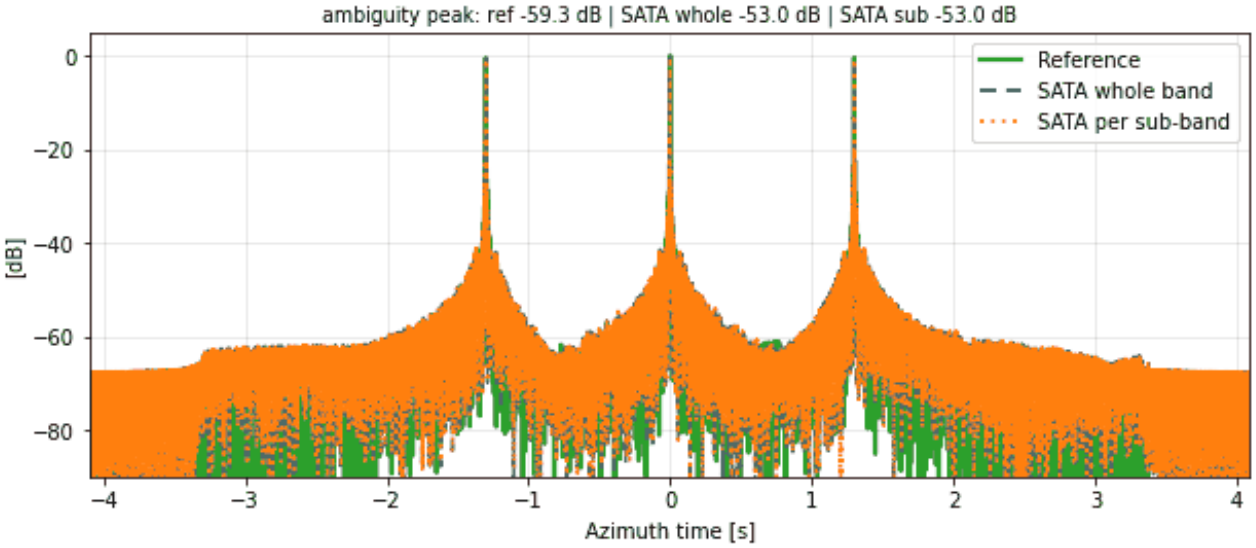


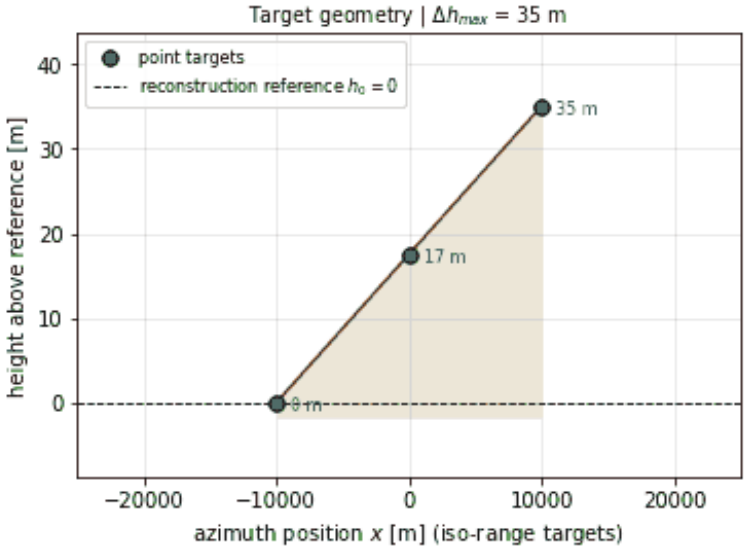



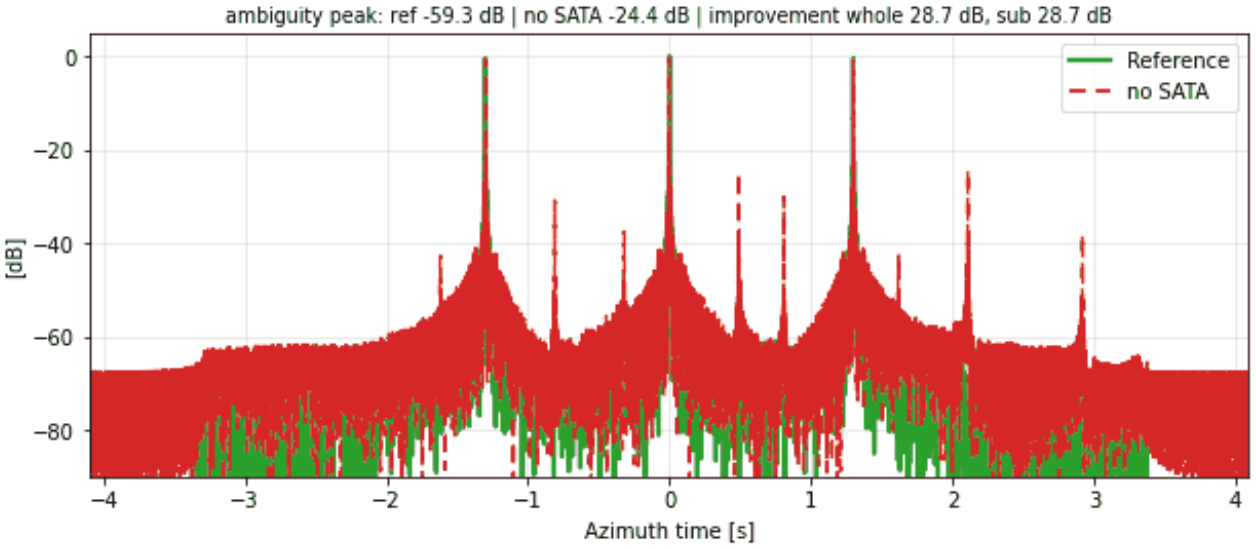



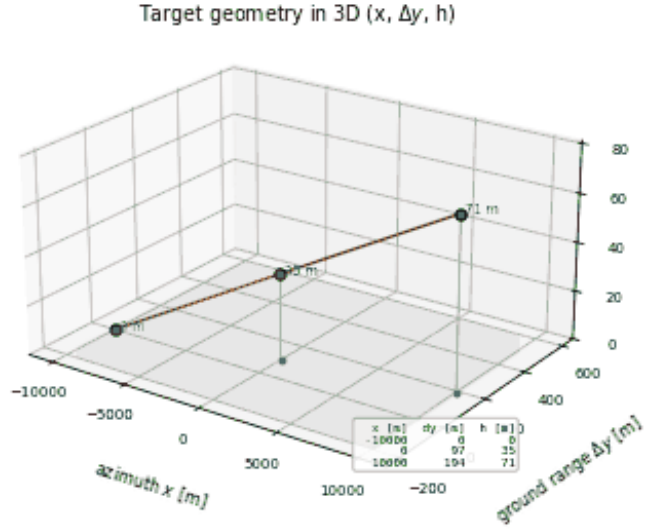



RA-LN-021 | SATA 1D | along-track ramp: N = 3, $\alpha = 10^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

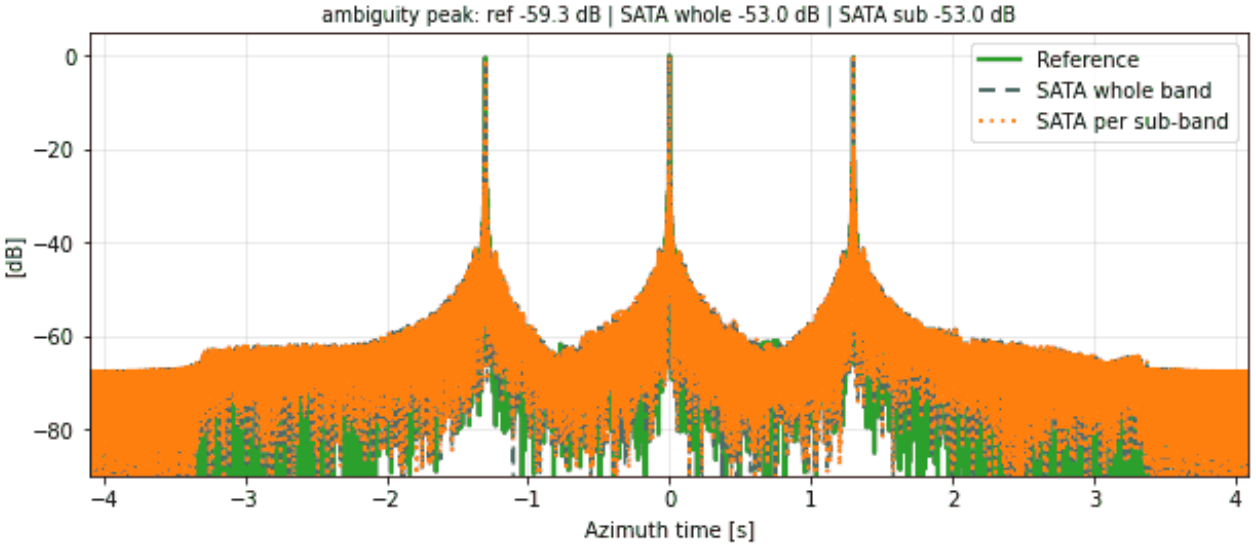


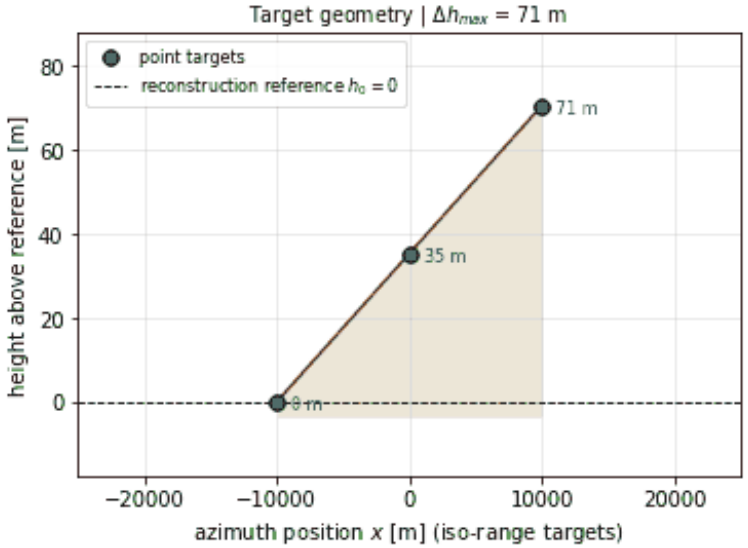



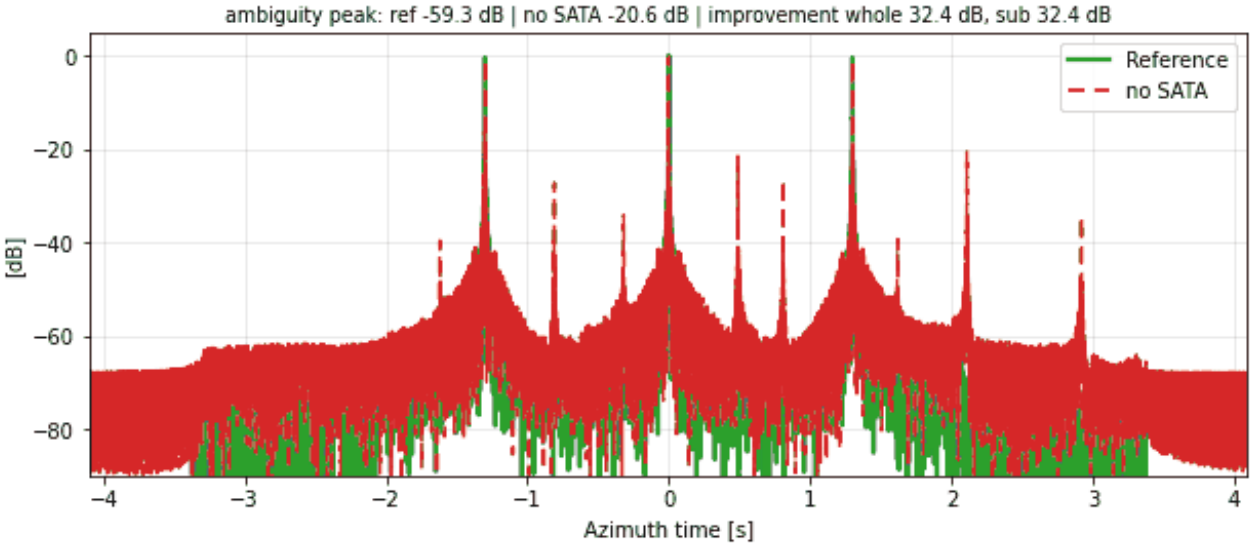



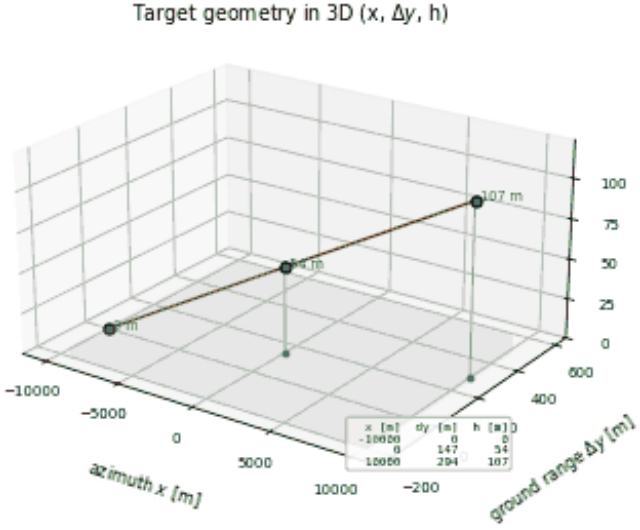



RA-LN-022 | SATA 1D | along-track ramp: N = 3, $\alpha = 15^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

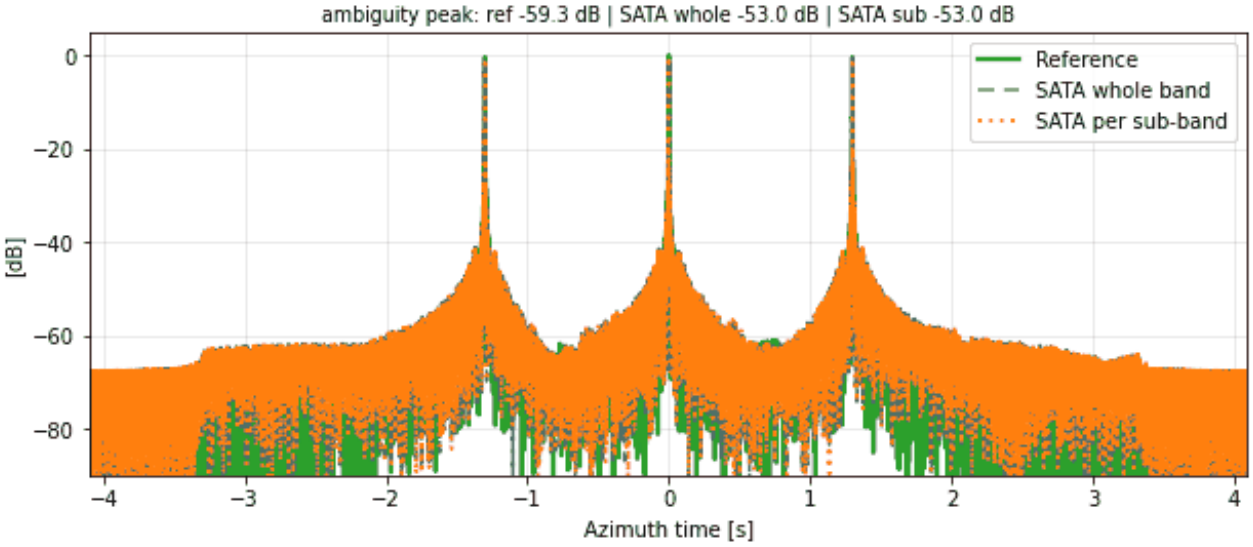

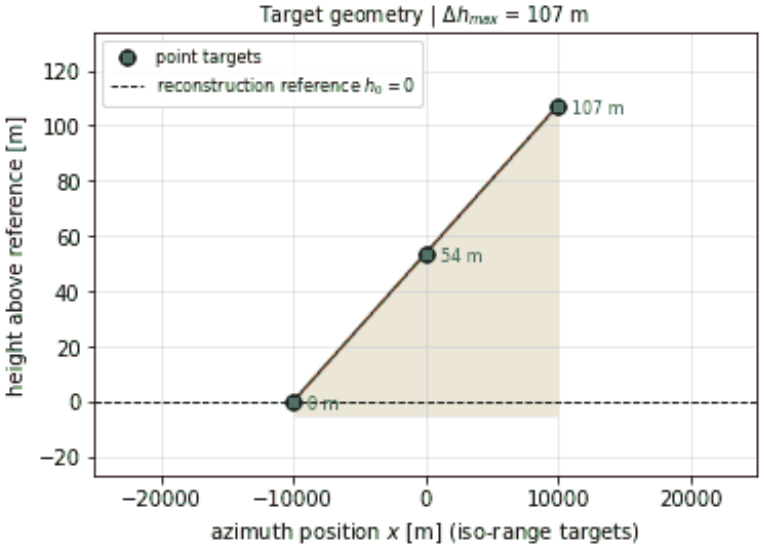



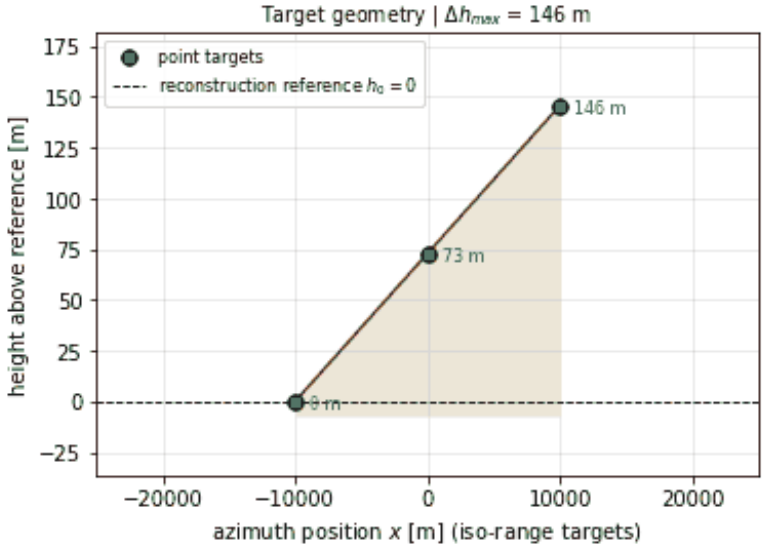



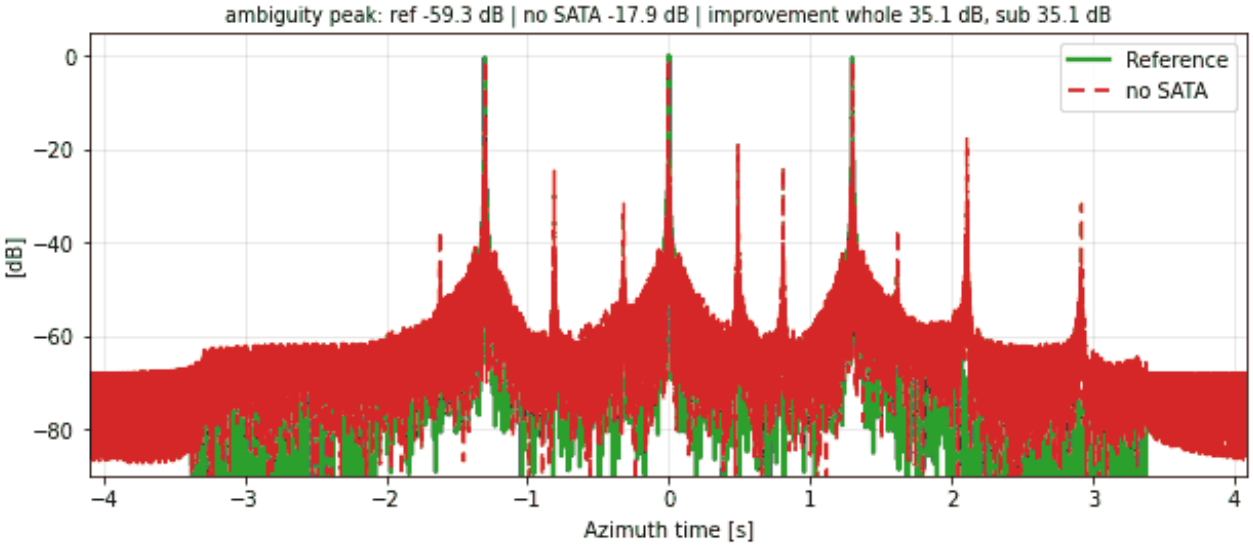



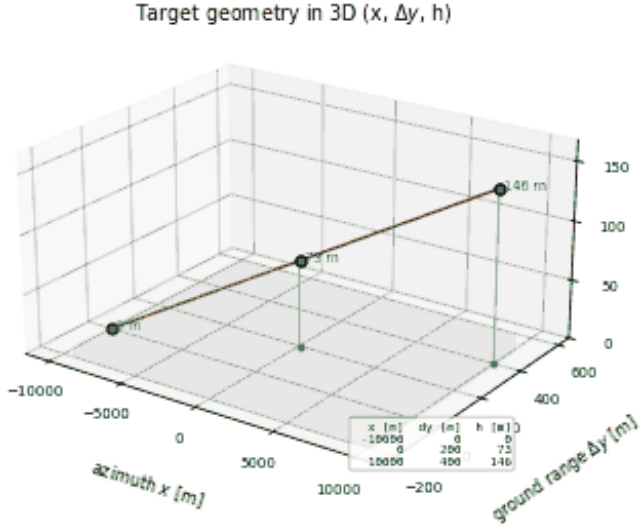

435

RA-LN-023 | SATA 1D | along-track ramp: N = 3, $\alpha = 20°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

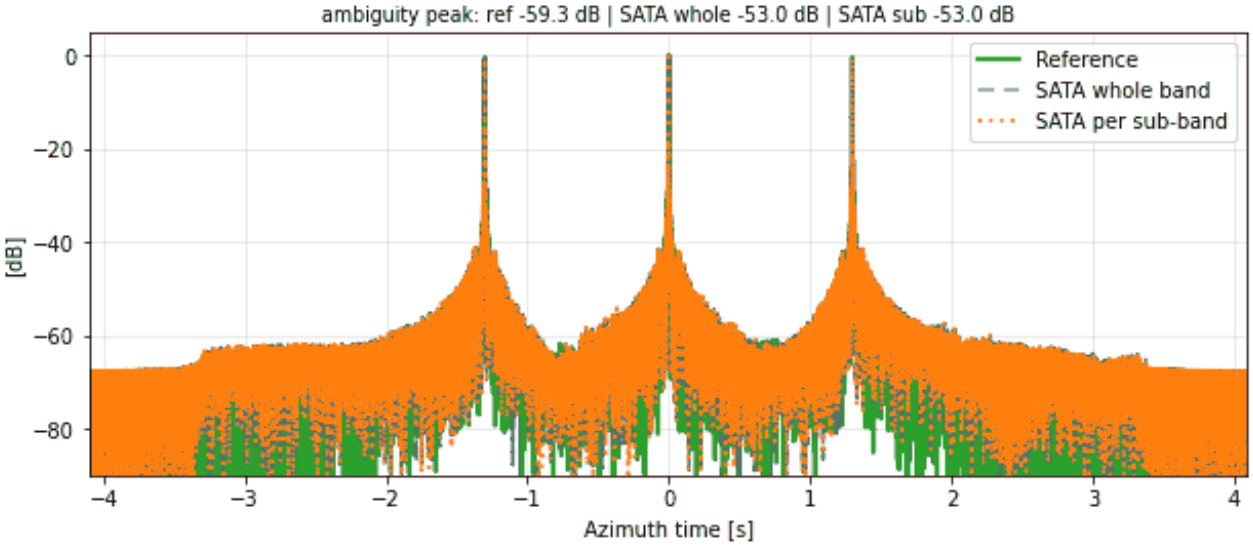






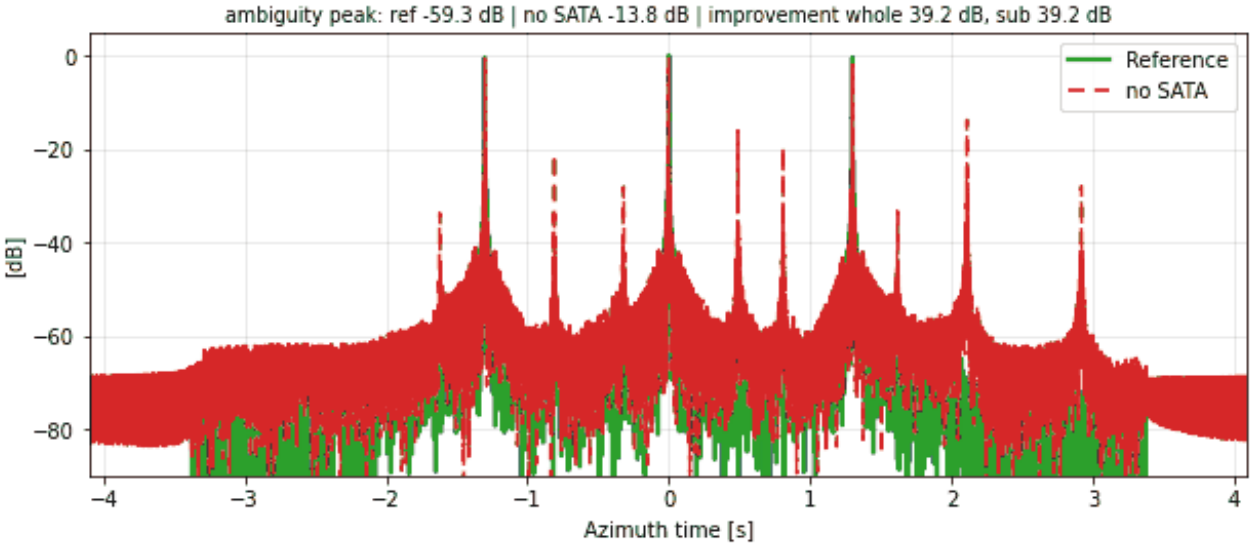



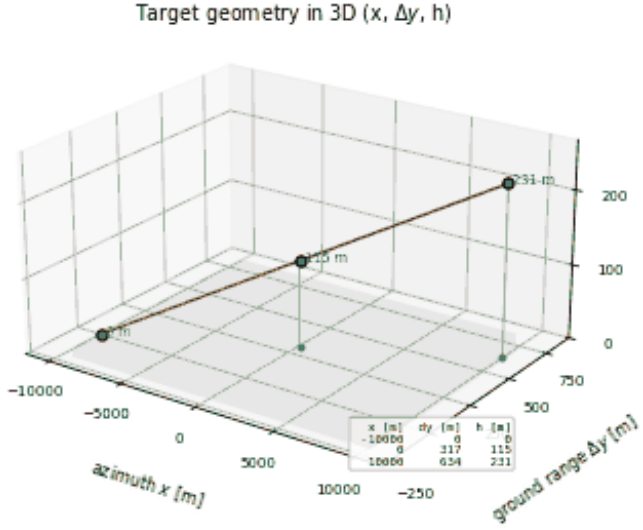



RA-LN-024 | SATA 1D | along-track ramp: N = 3, $\alpha = 30°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

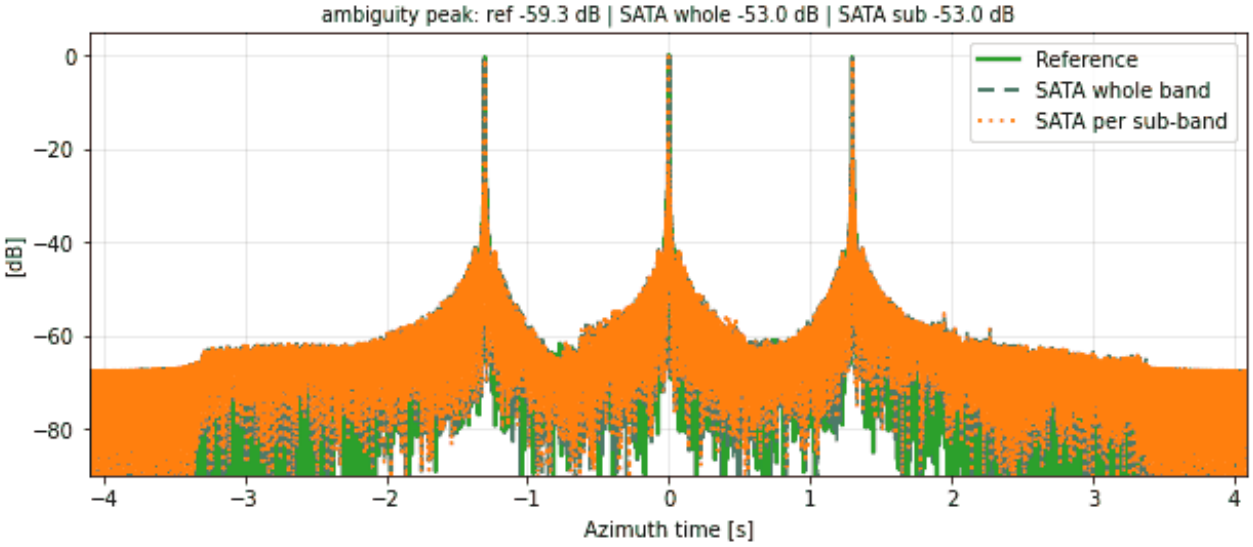

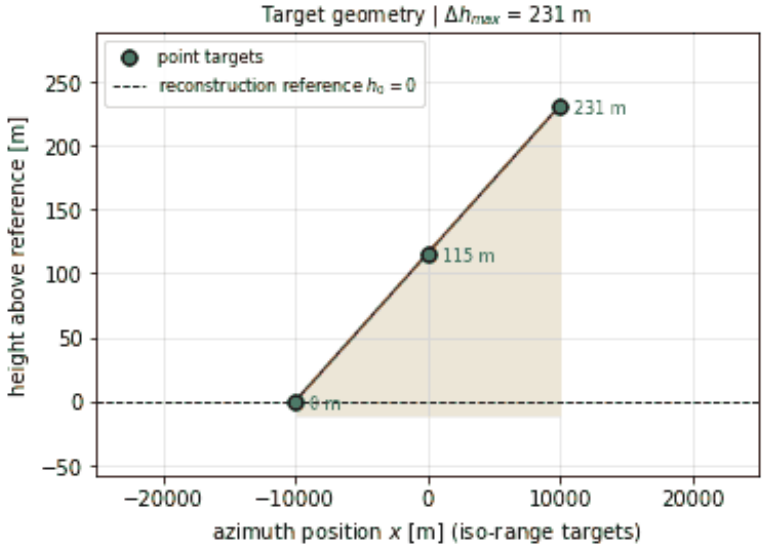



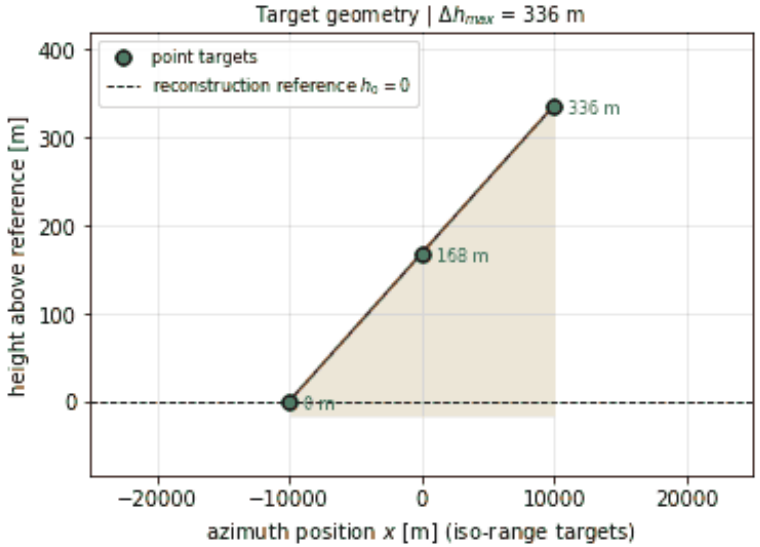



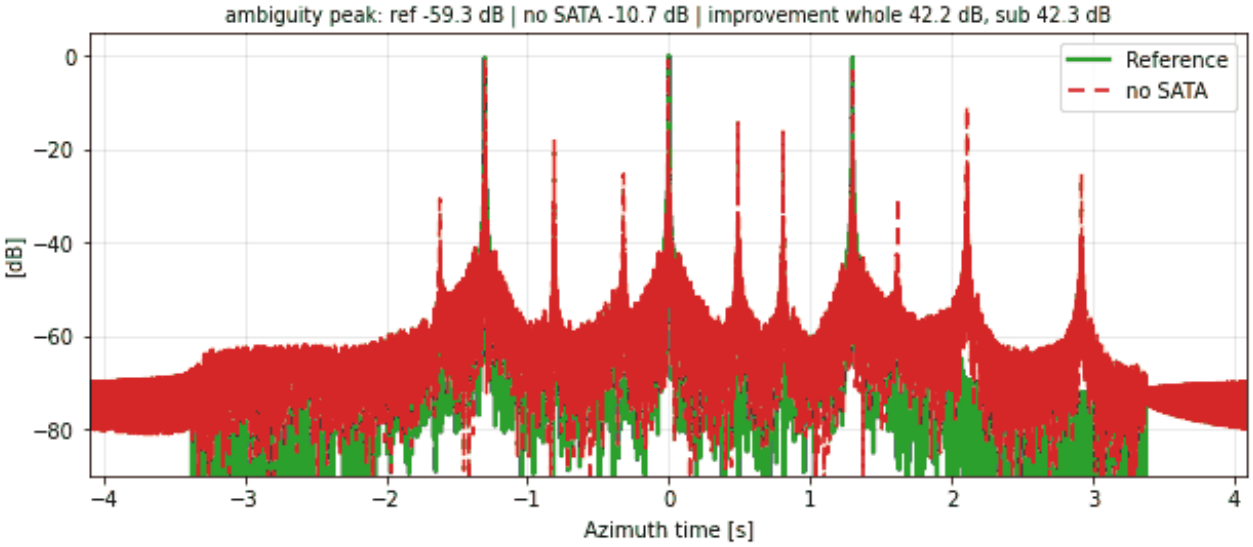



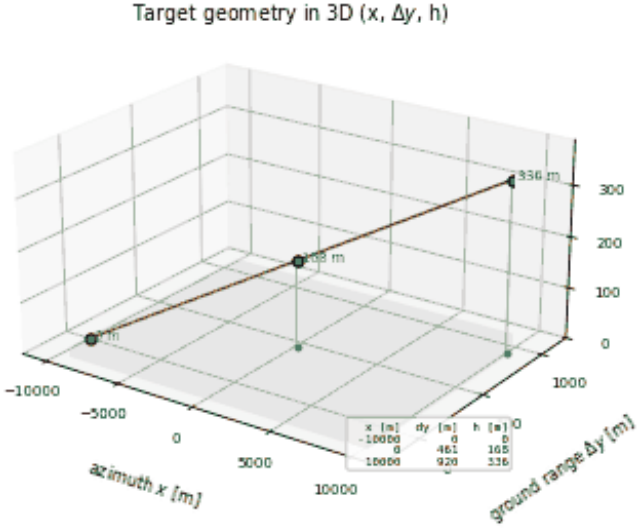
RA-LN-025 | SATA 1D | along-track ramp: N = 3, $\alpha = 40°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

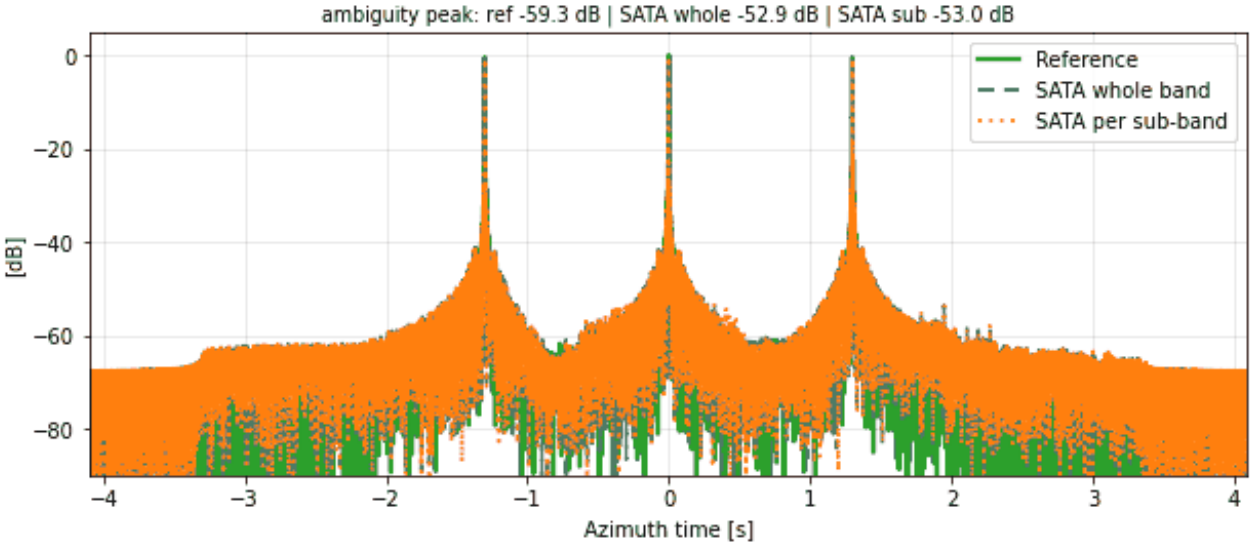





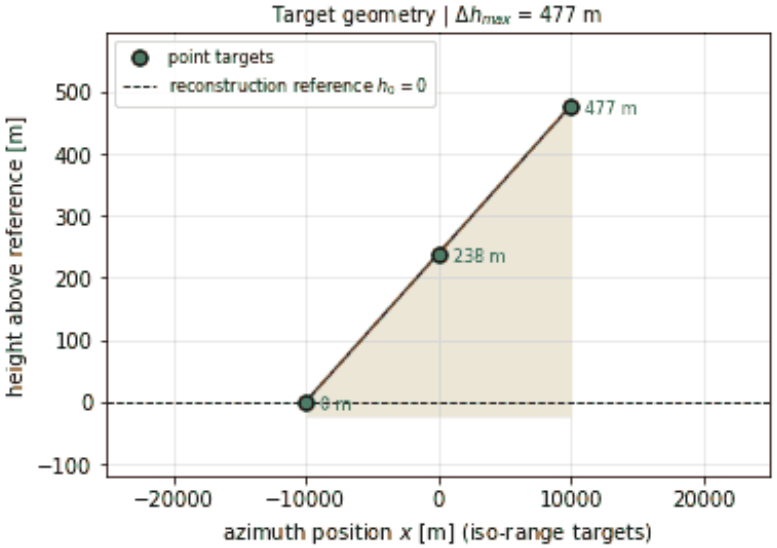



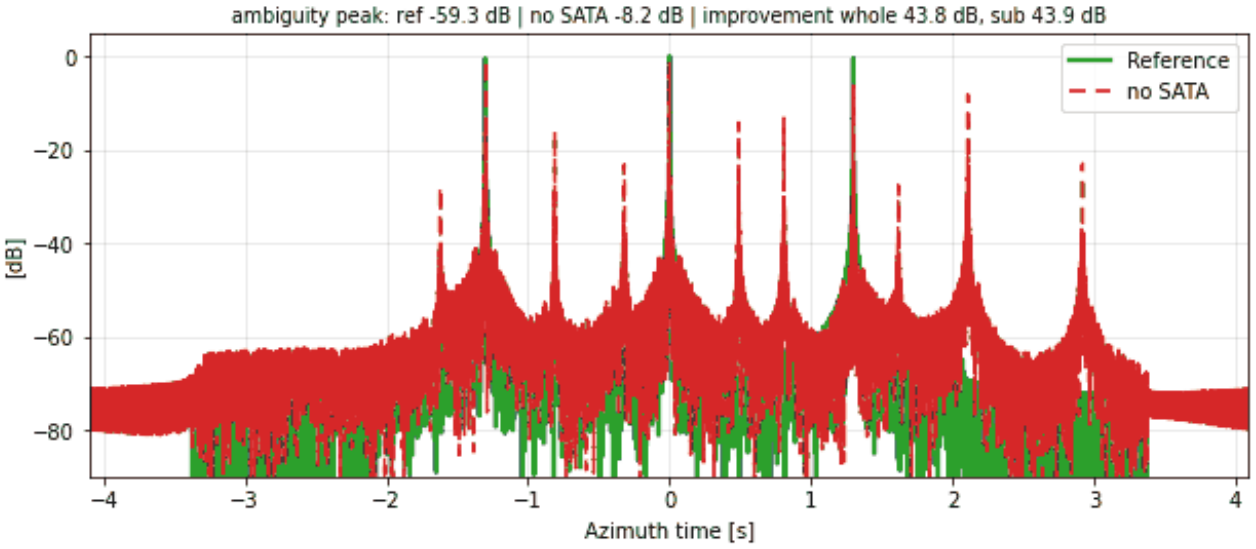



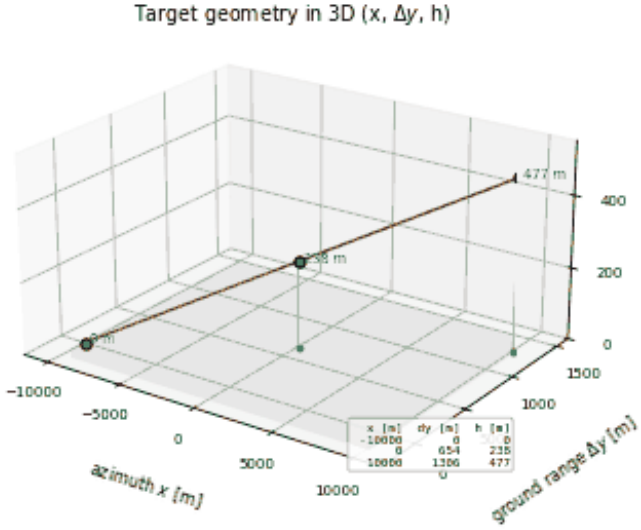
RA-LN-026 | SATA 1D | along-track ramp: N = 3, $\alpha = 50°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

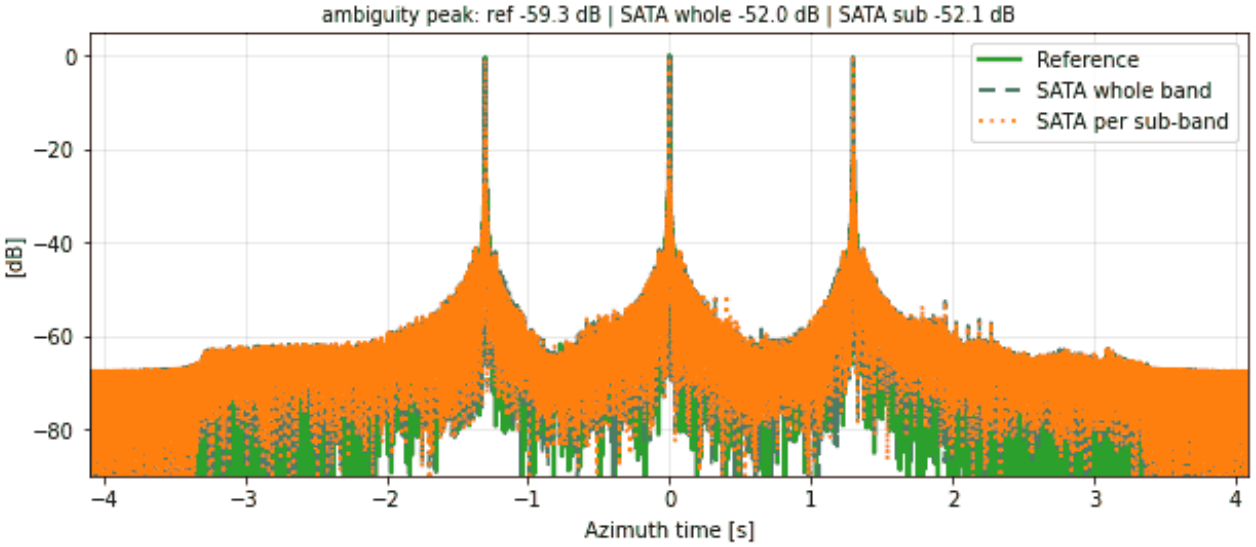






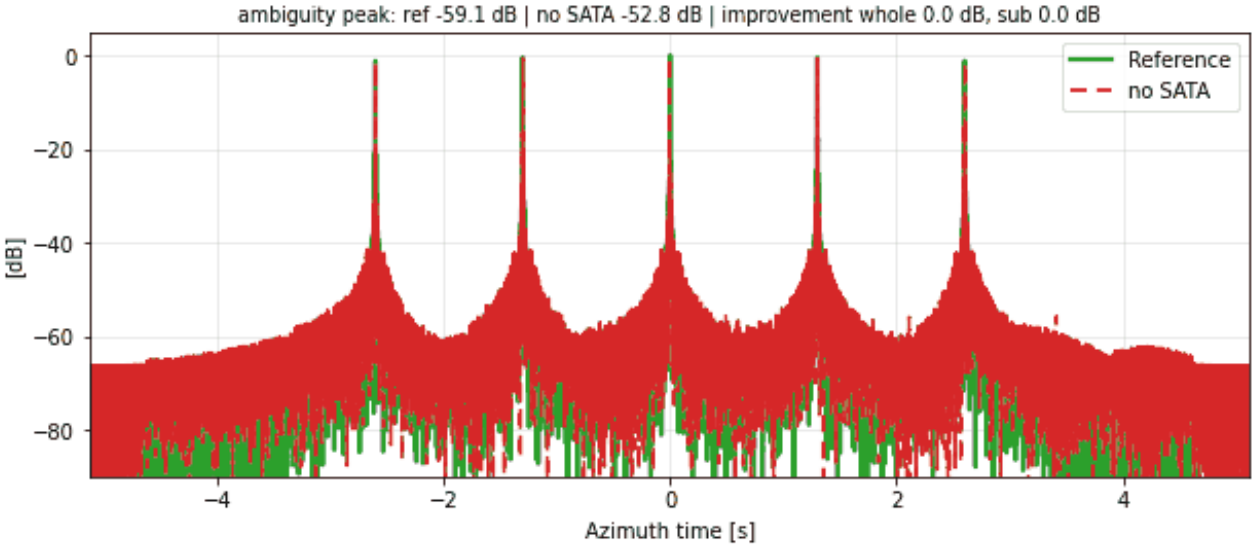



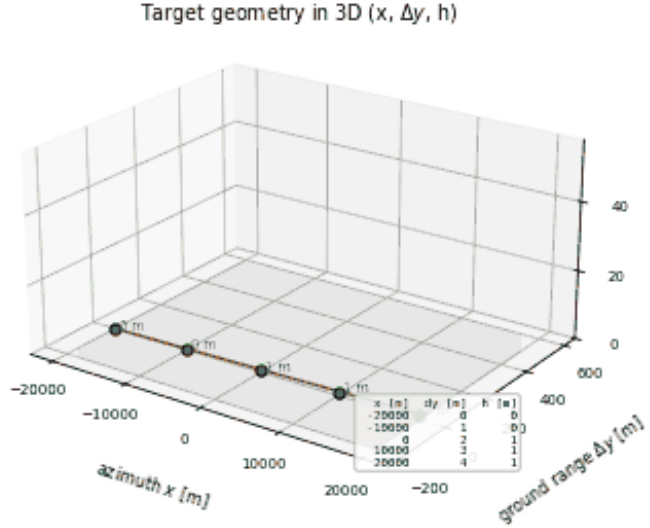



RA-LN-027 | SATA 1D | along-track ramp: N = 5, $\alpha = 0.1^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

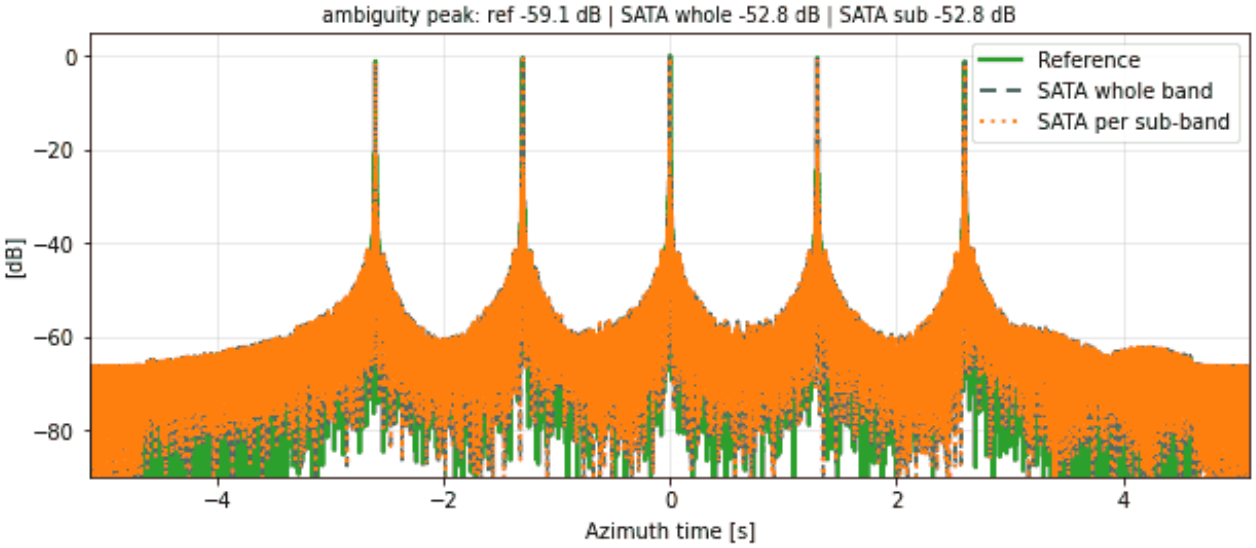


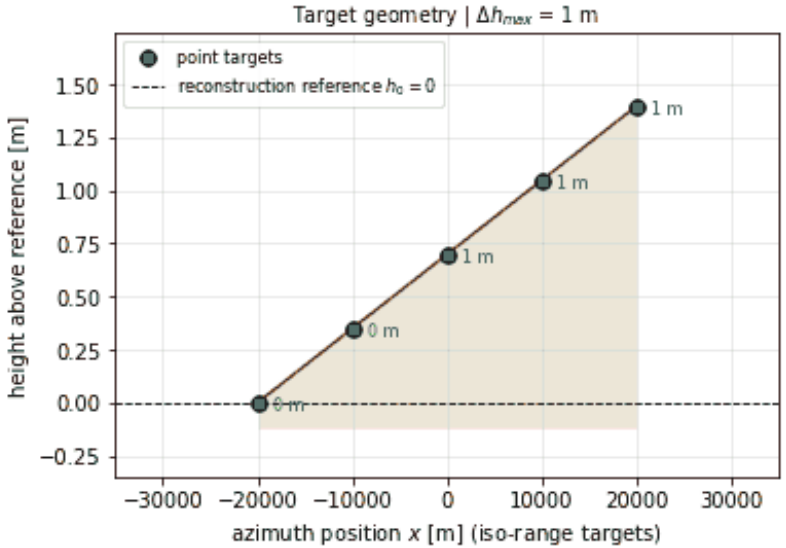



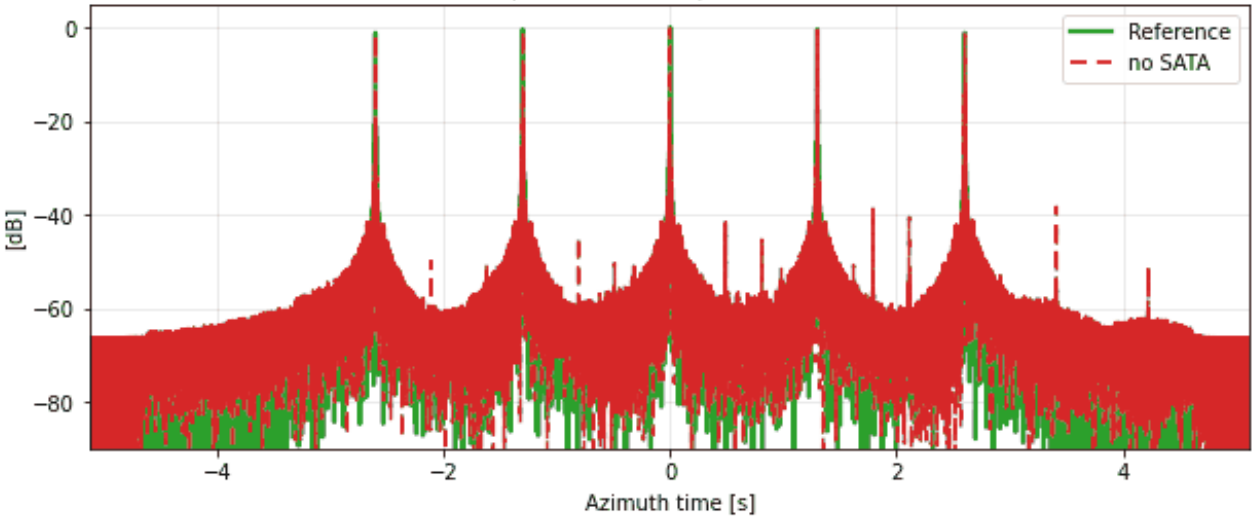



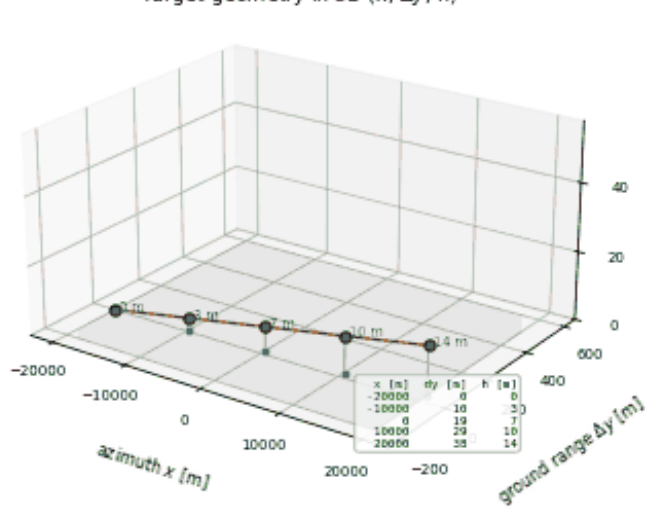



RA-LN-028 | SATA 1D | along-track ramp: N = 5, $\alpha = 1^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

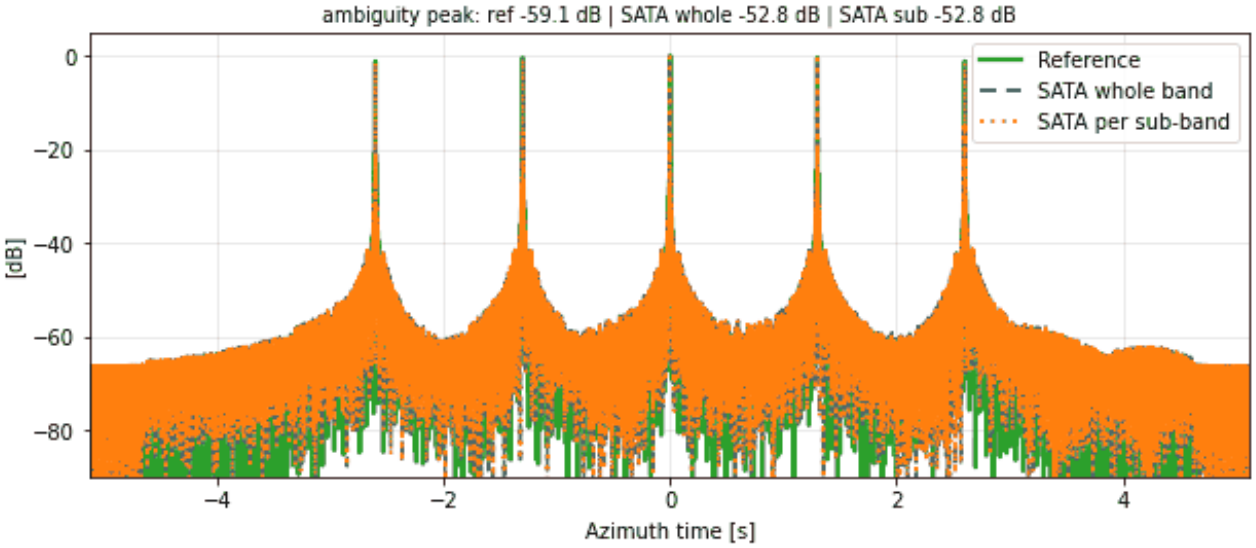


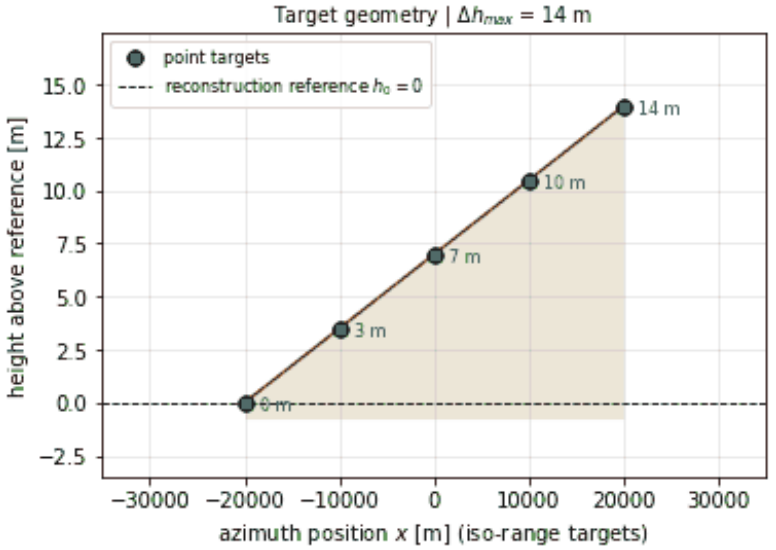



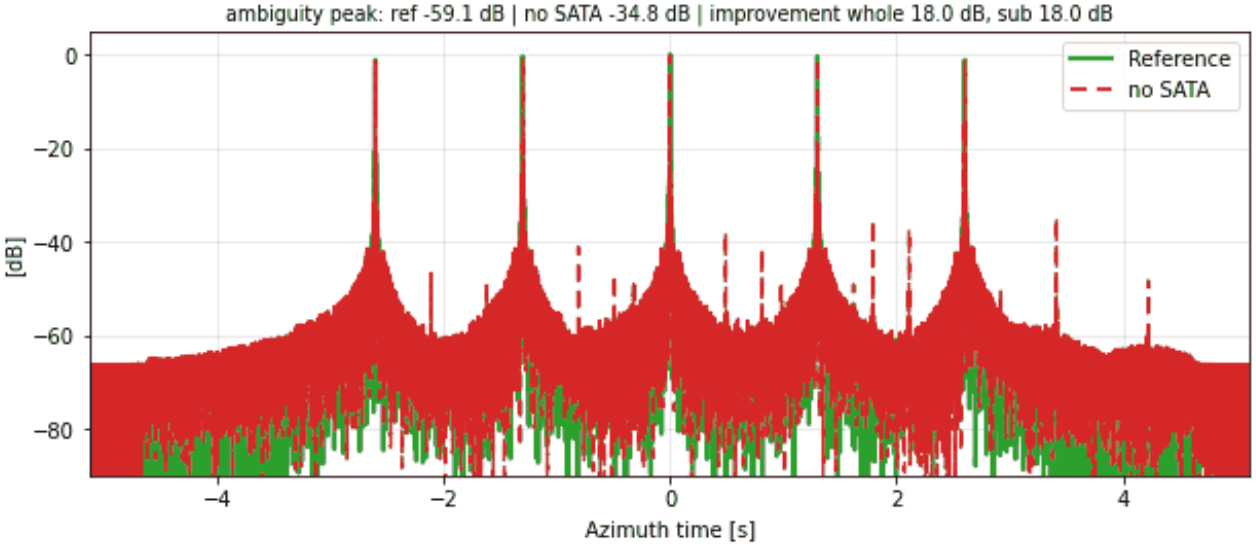



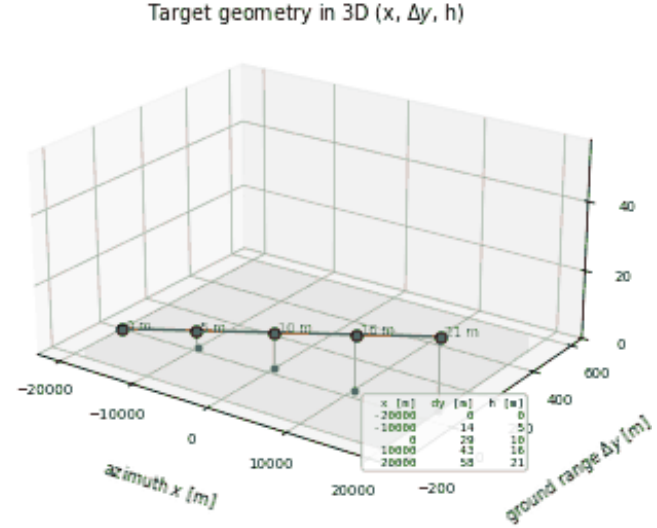



RA-LN-029 | SATA 1D | along-track ramp: N = 5, $\alpha = 1.5°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

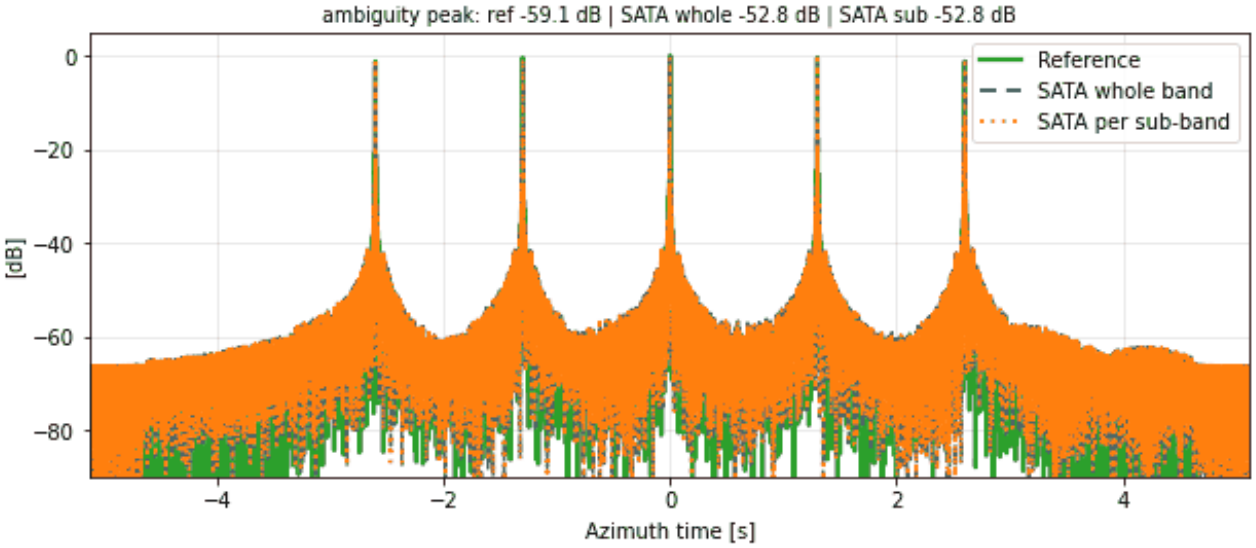

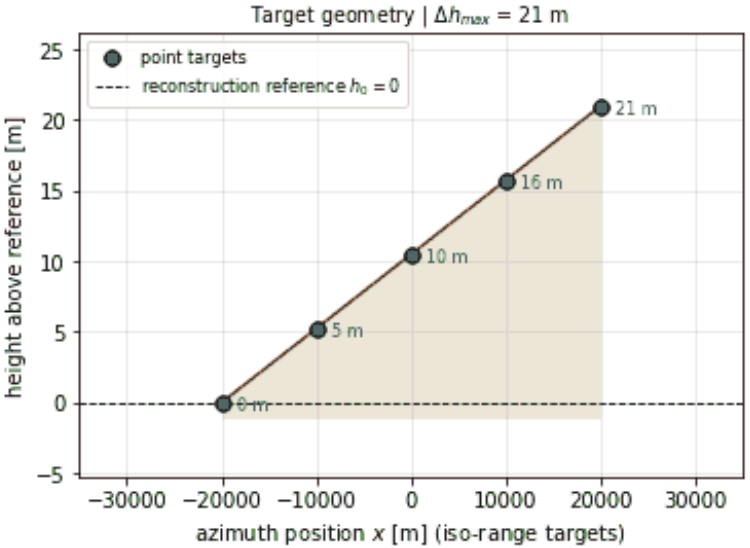



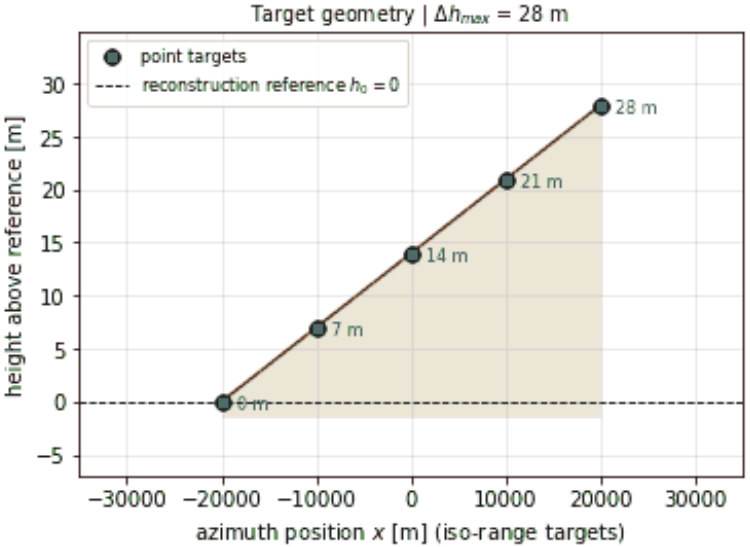



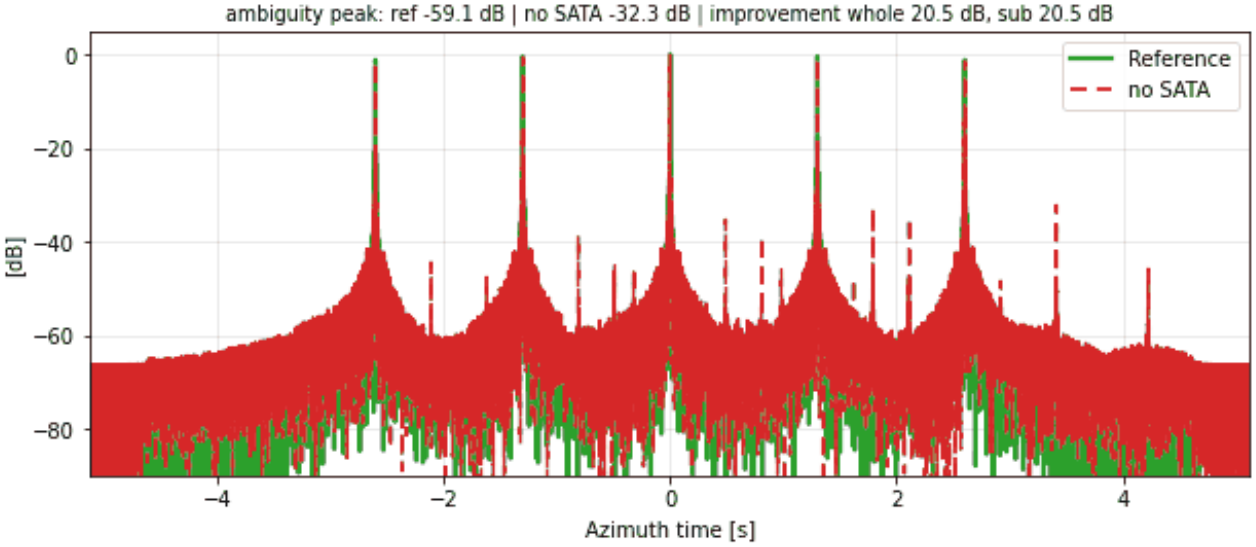



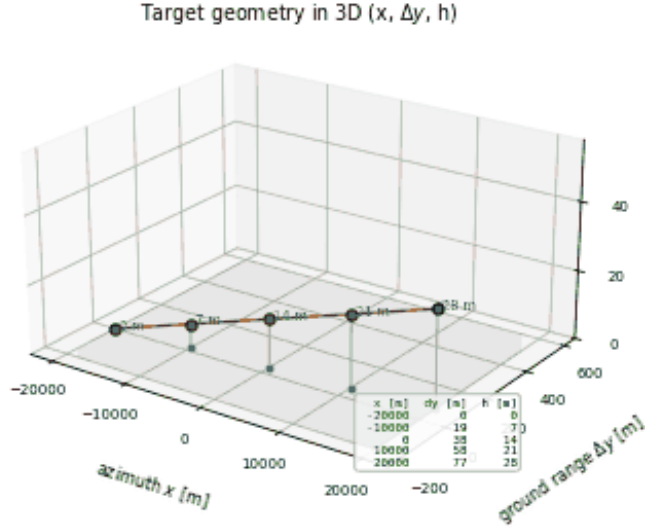
RA-LN-030 | SATA 1D | along-track ramp: N = 5, $\alpha = 2°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

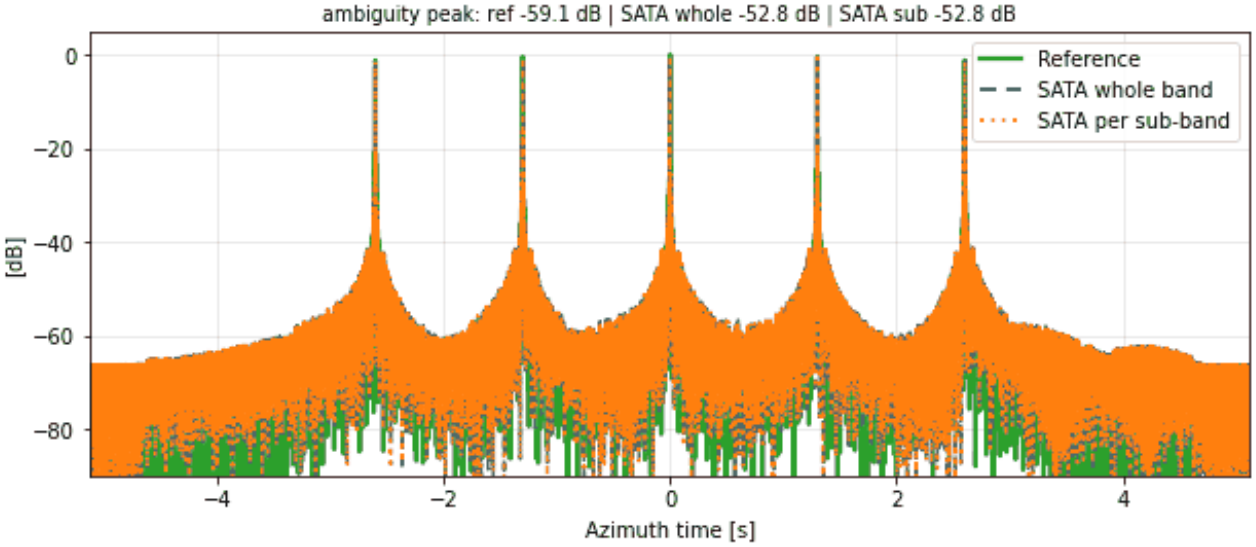





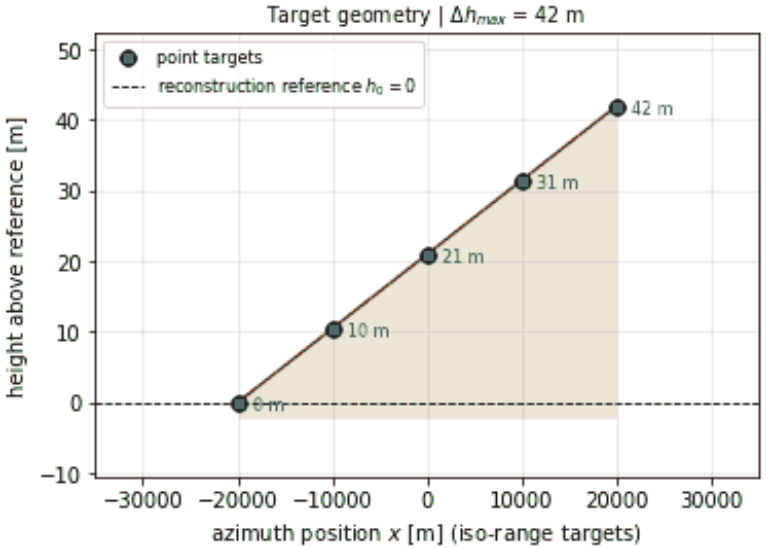



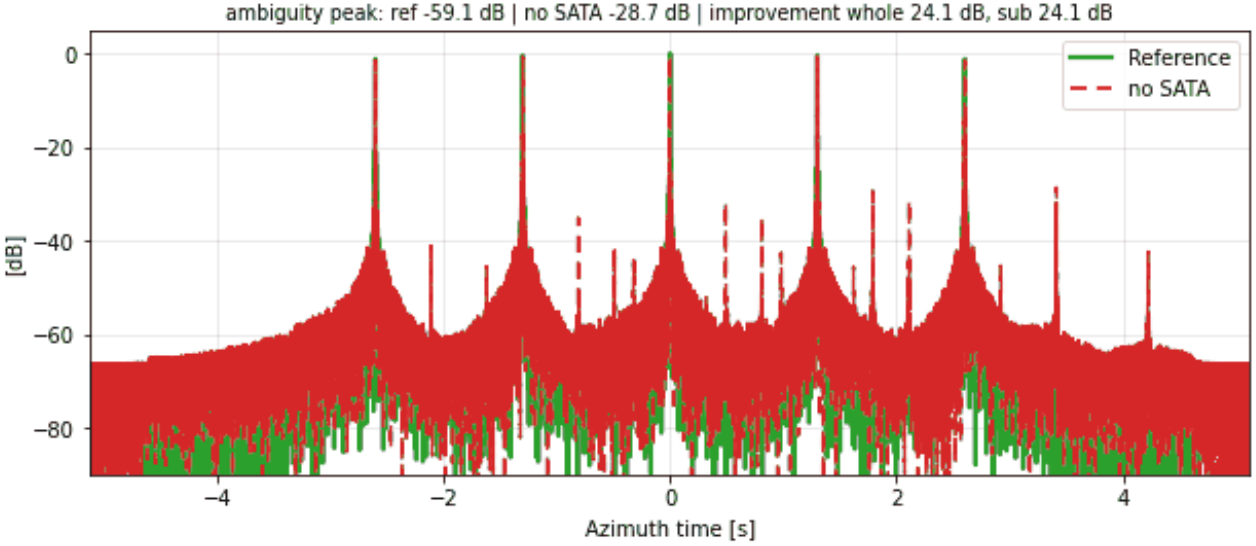



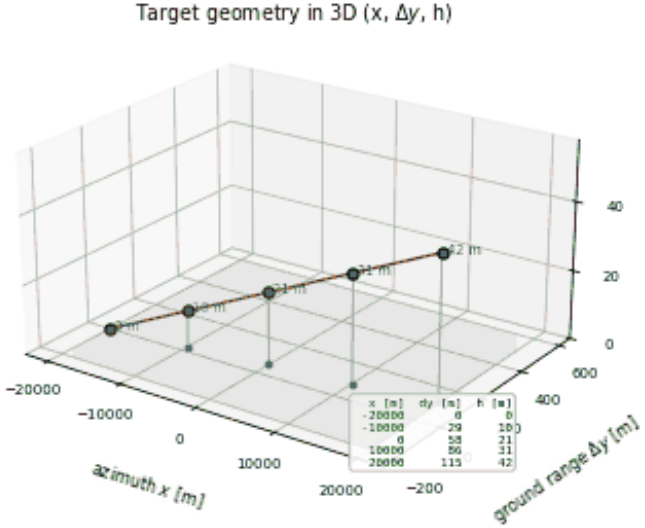
RA-LN-031 | SATA 1D | along-track ramp: N = 5, $\alpha = 3°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

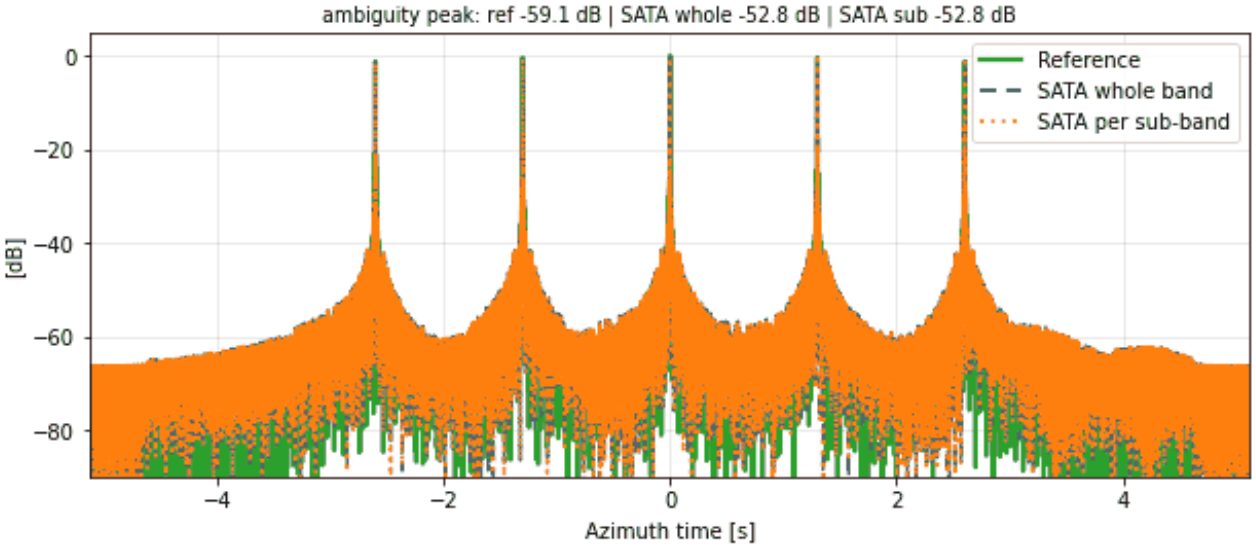





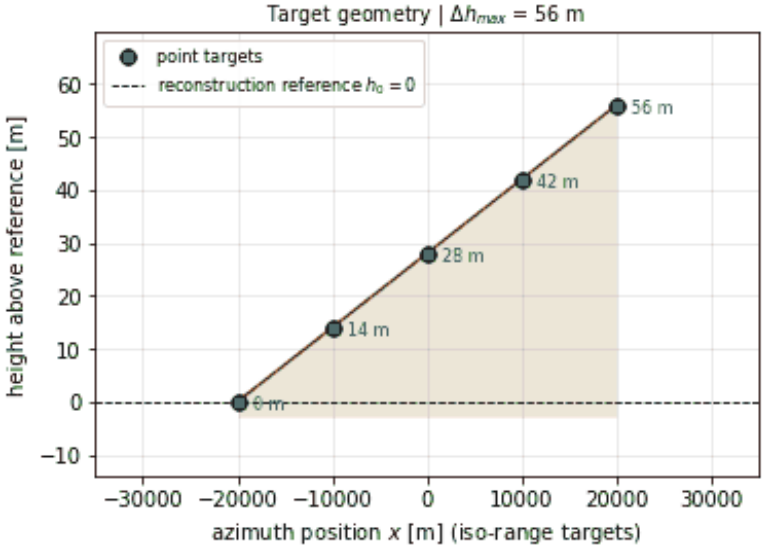



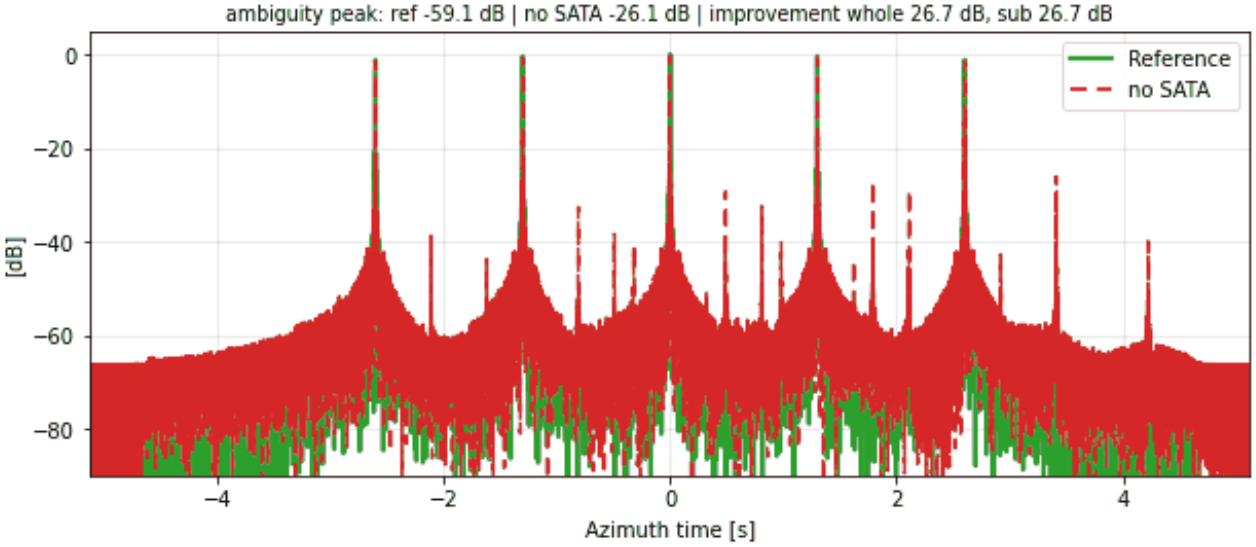



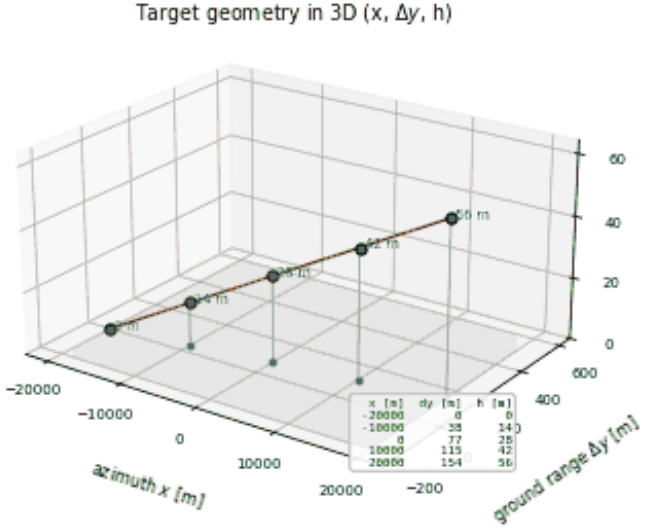

444

RA-LN-032 | SATA 1D | along-track ramp: N = 5, $\alpha = 4°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

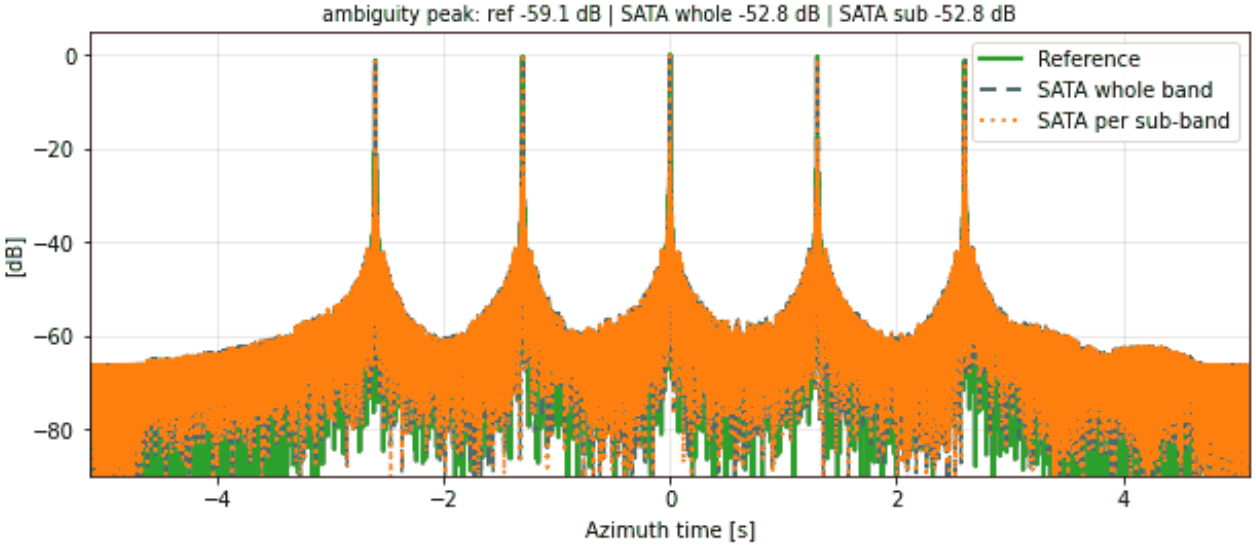






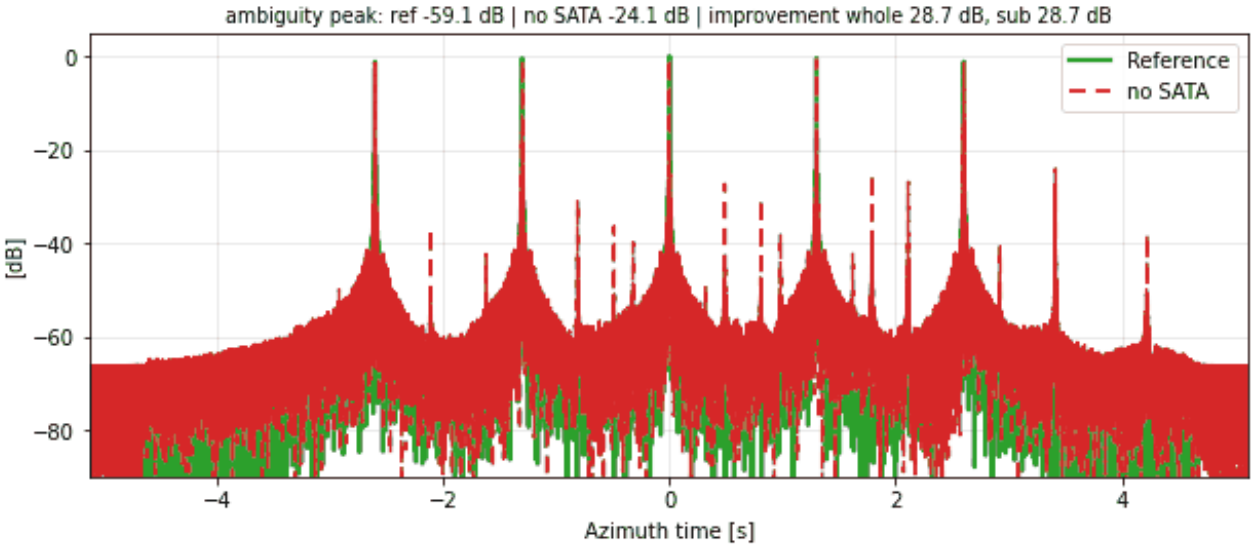



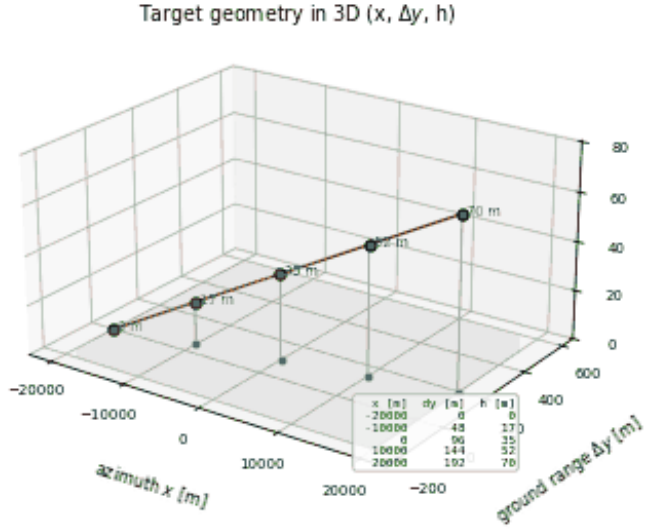



RA-LN-033 | SATA 1D | along-track ramp: N = 5, $\alpha = 5^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

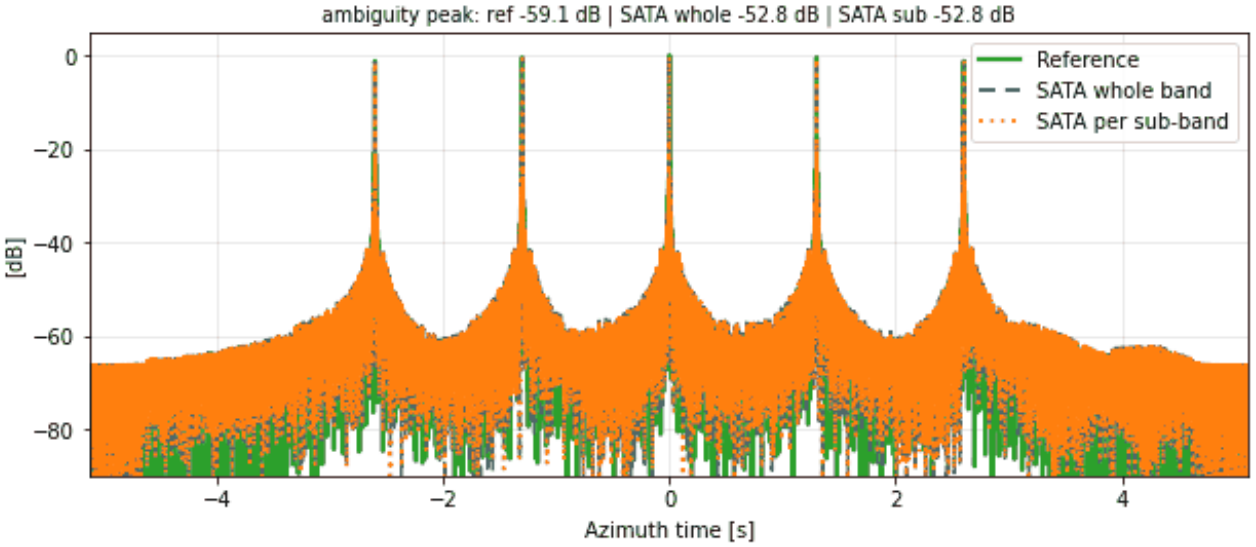


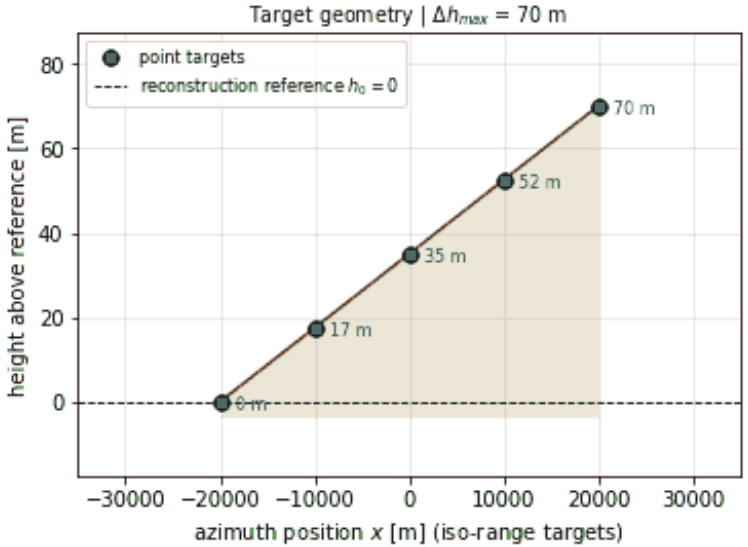



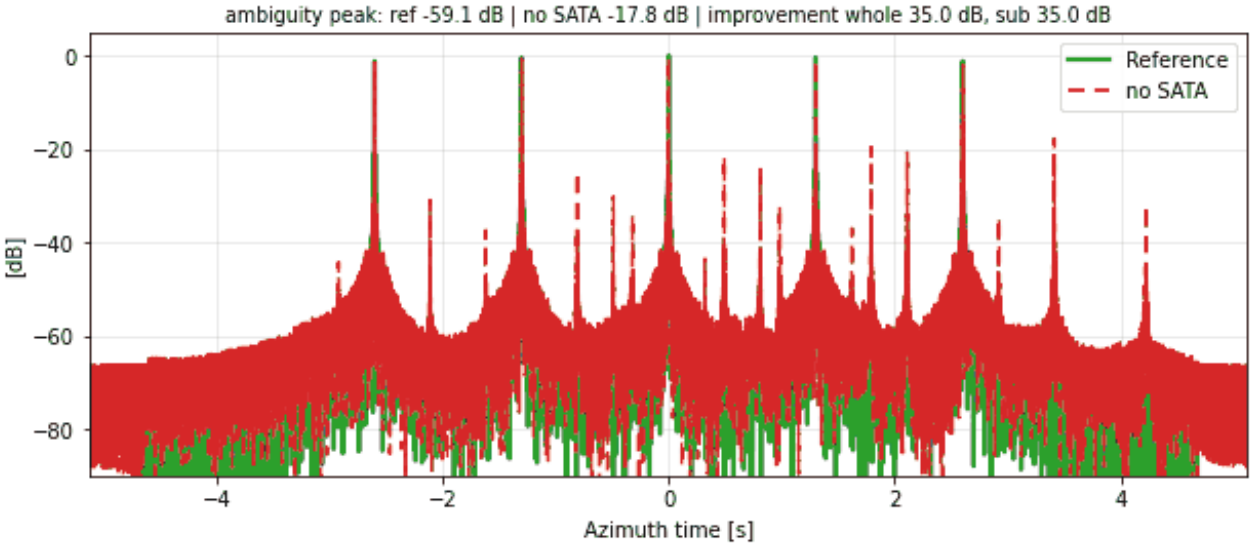



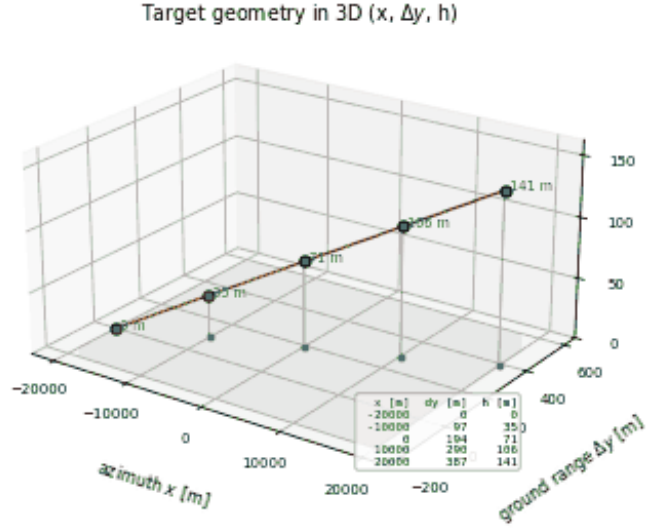



RA-LN-034 | SATA 1D | along-track ramp: N = 5, $\alpha = 10^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

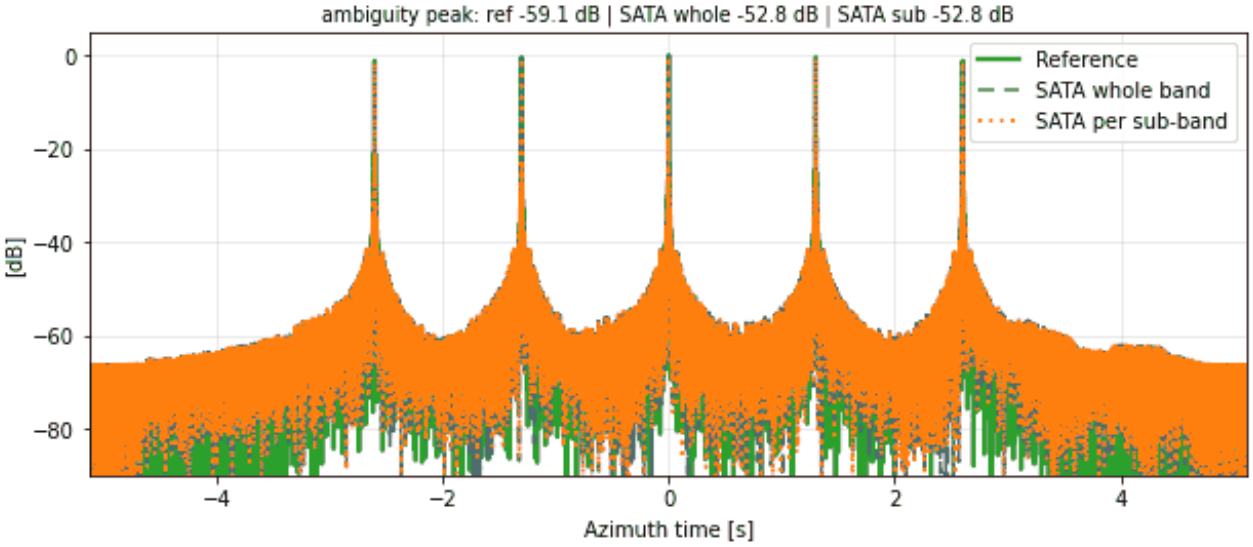


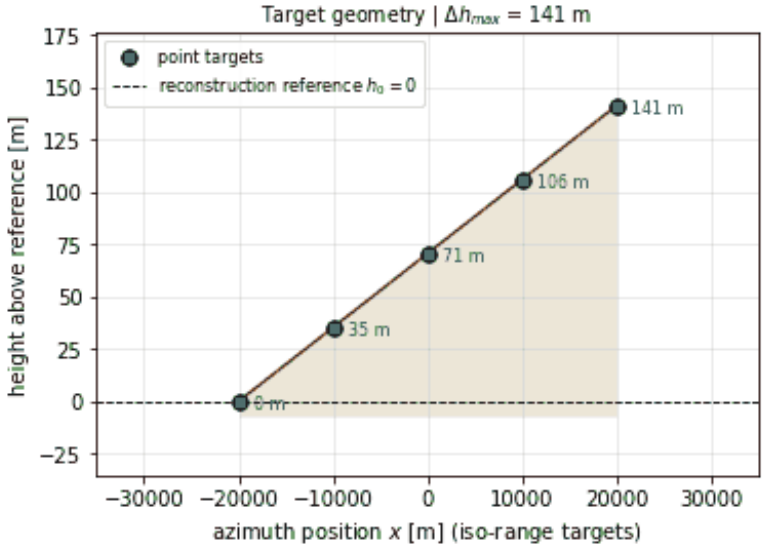



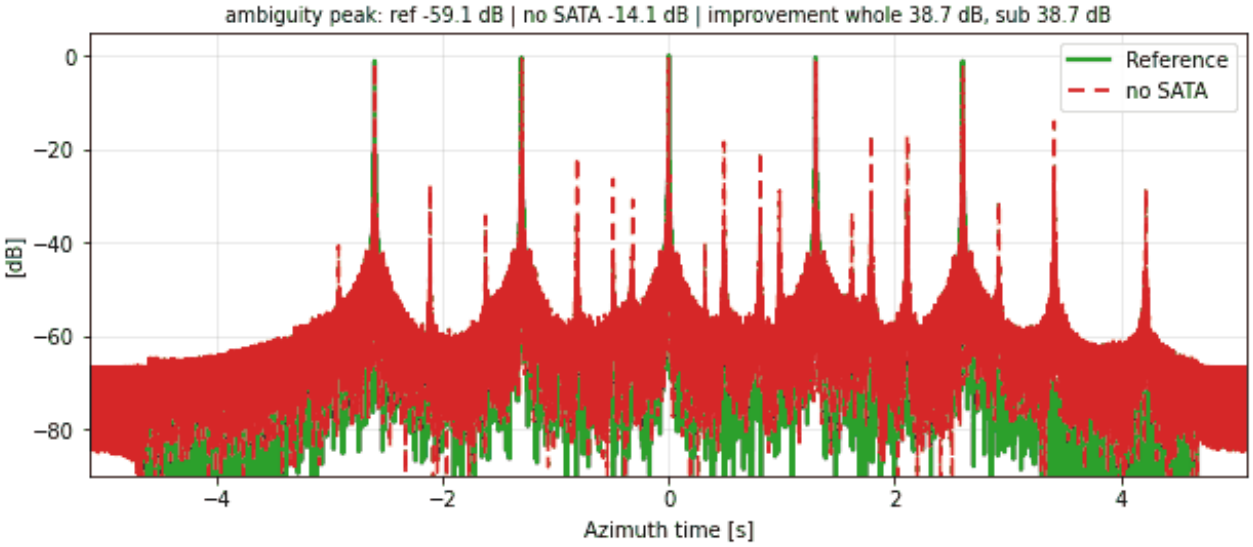



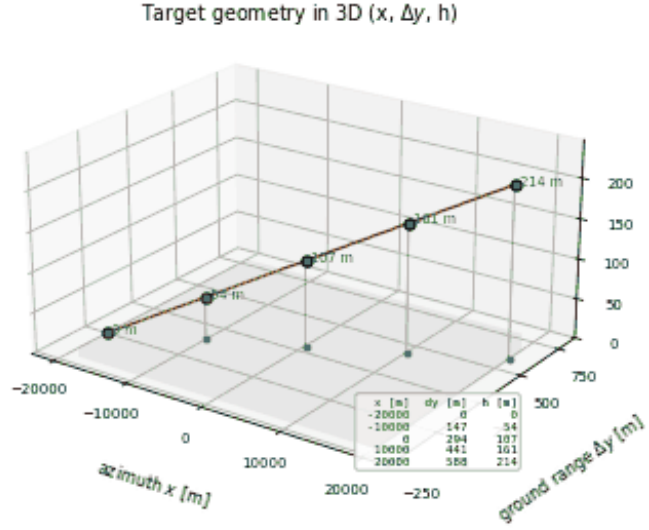



RA-LN-035 | SATA 1D | along-track ramp: N = 5, $\alpha = 15^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

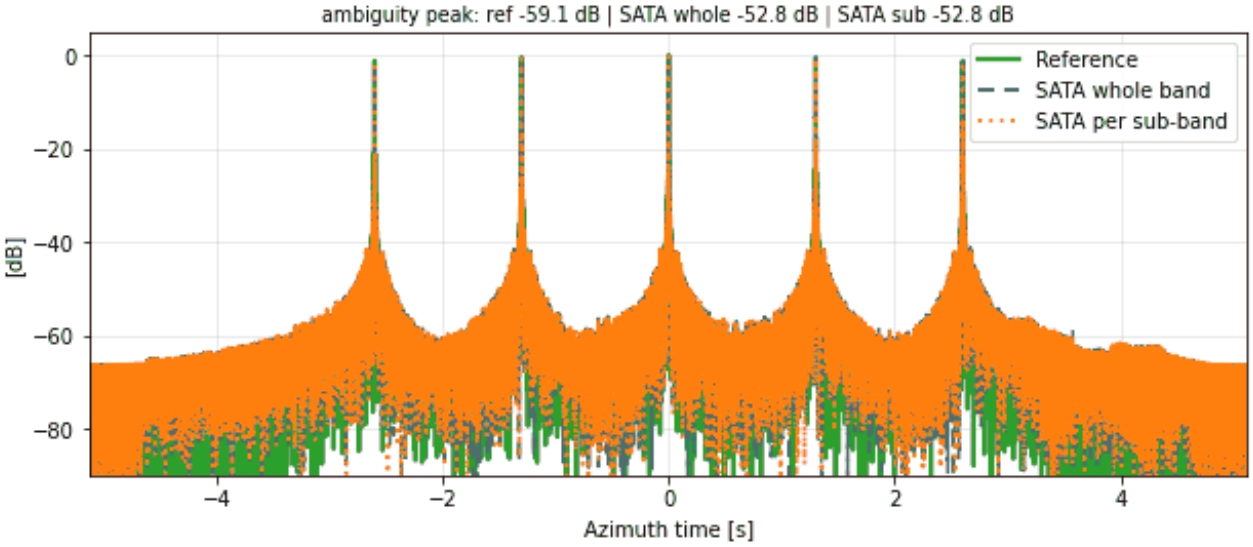


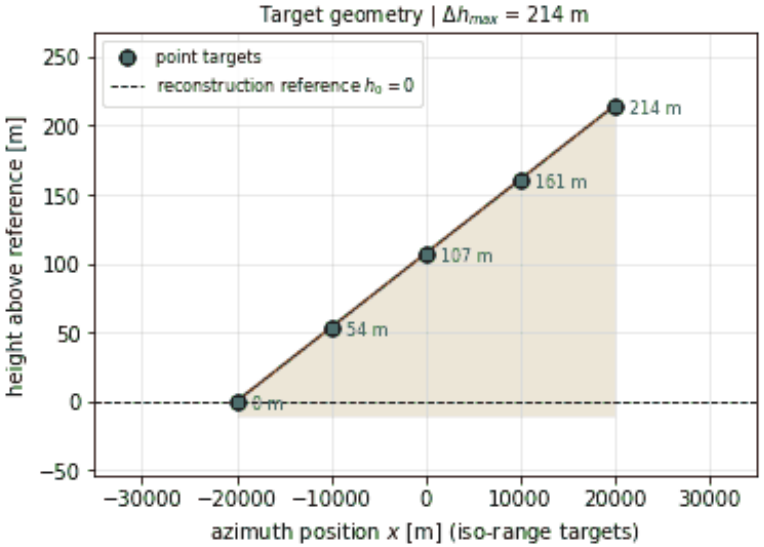



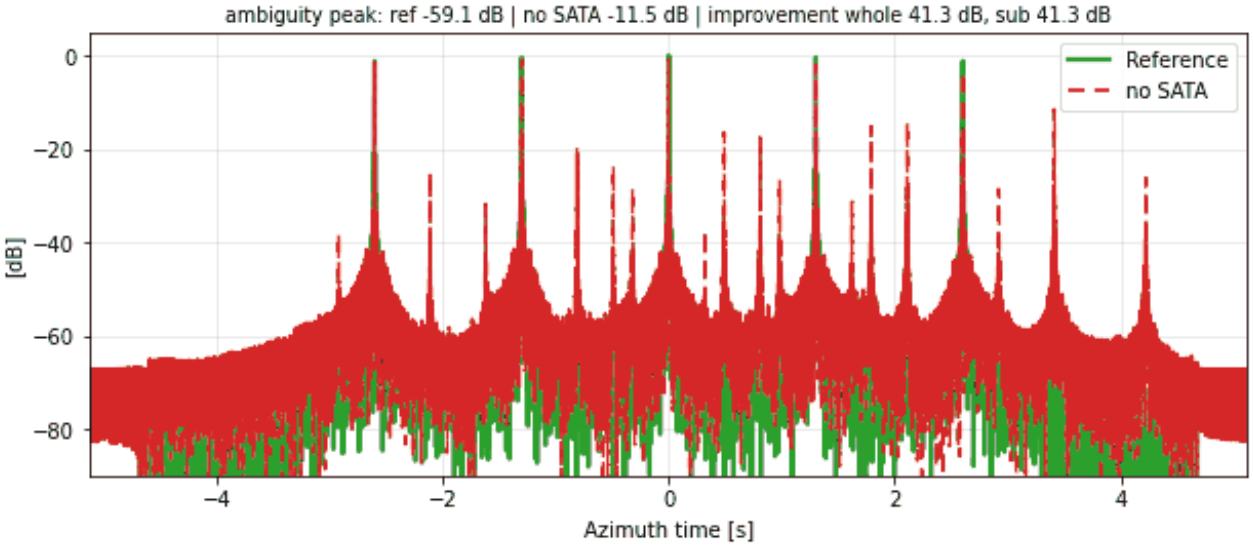



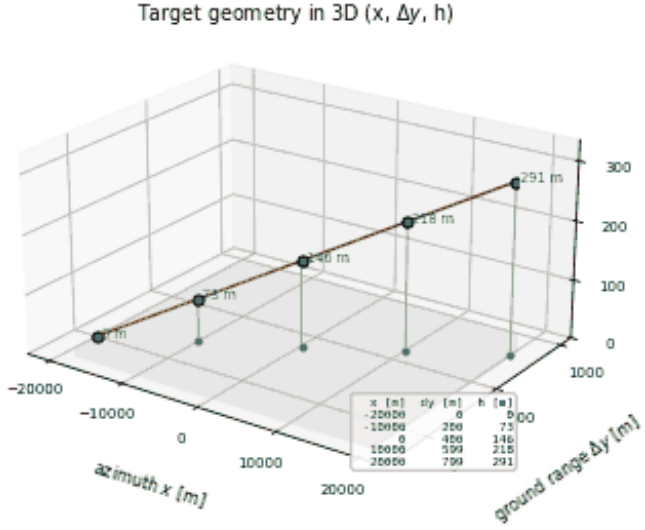



RA-LN-036 | SATA 1D | along-track ramp: N = 5, $\alpha = 20^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

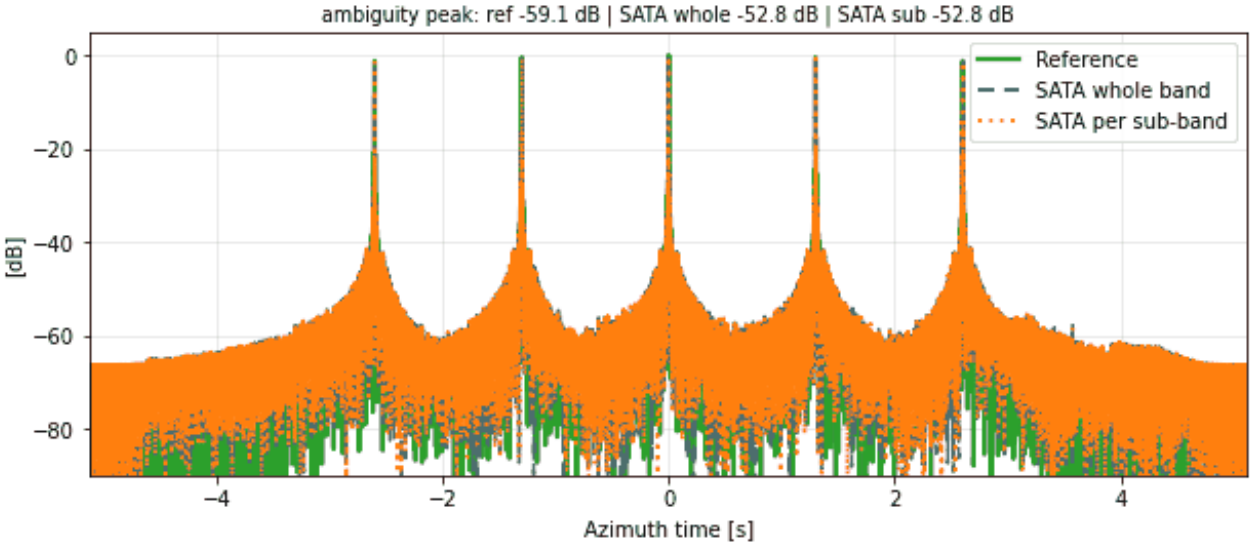


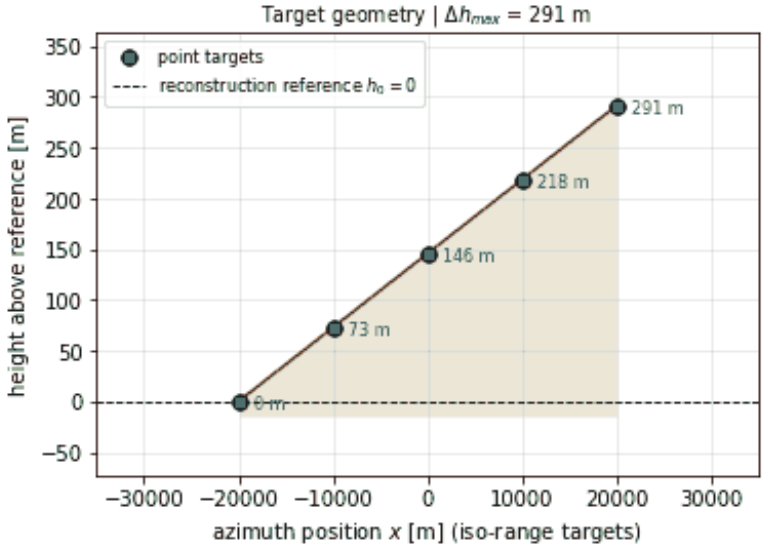



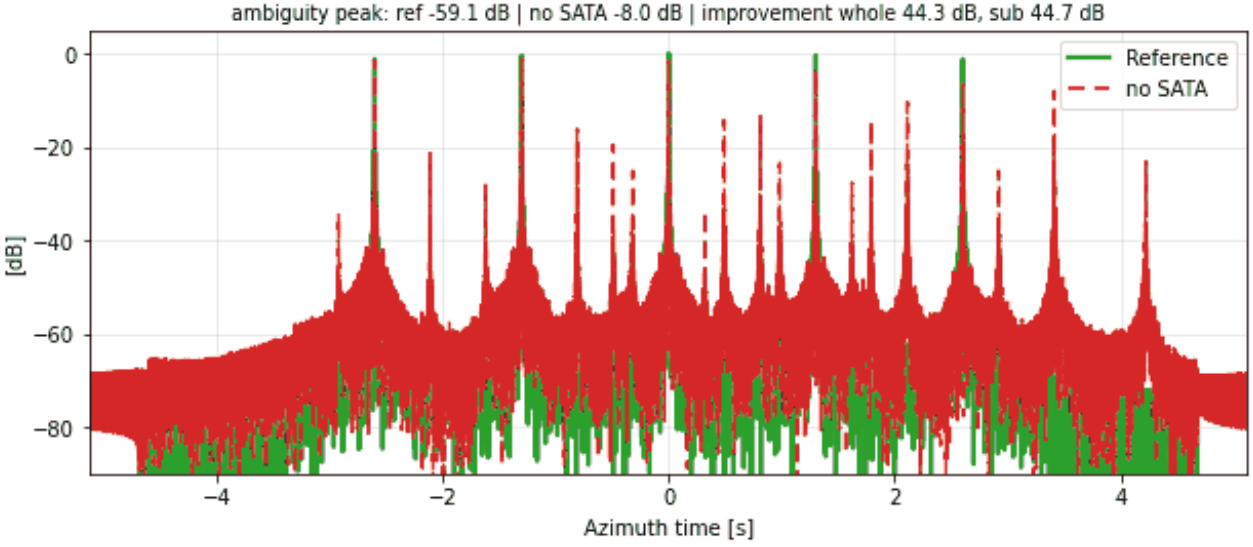



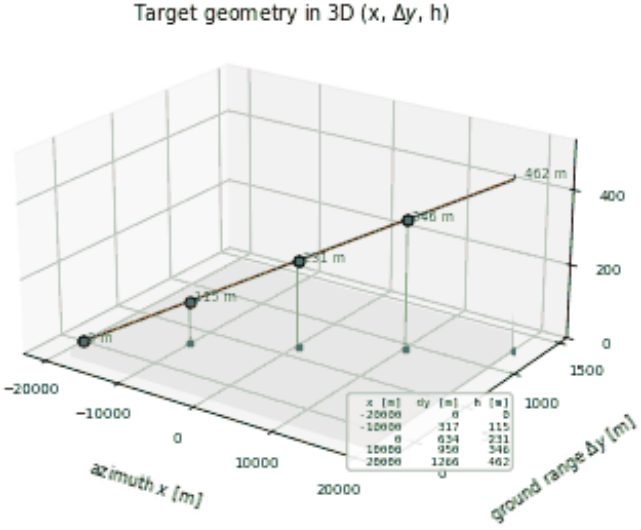



RA-LN-037 | SATA 1D | along-track ramp: N = 5, $\alpha = 30^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

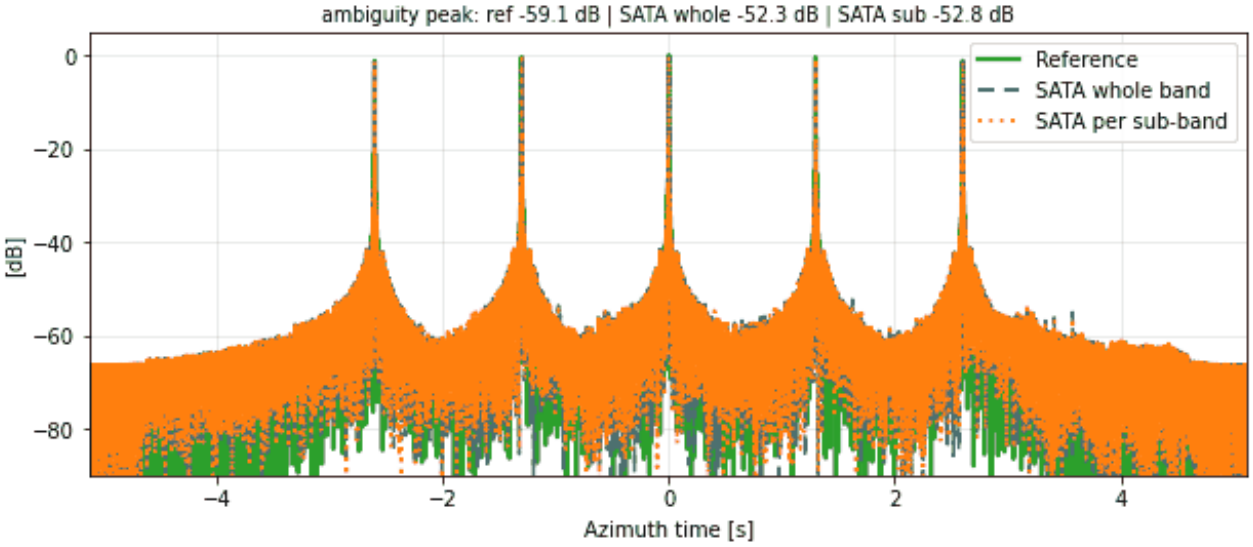


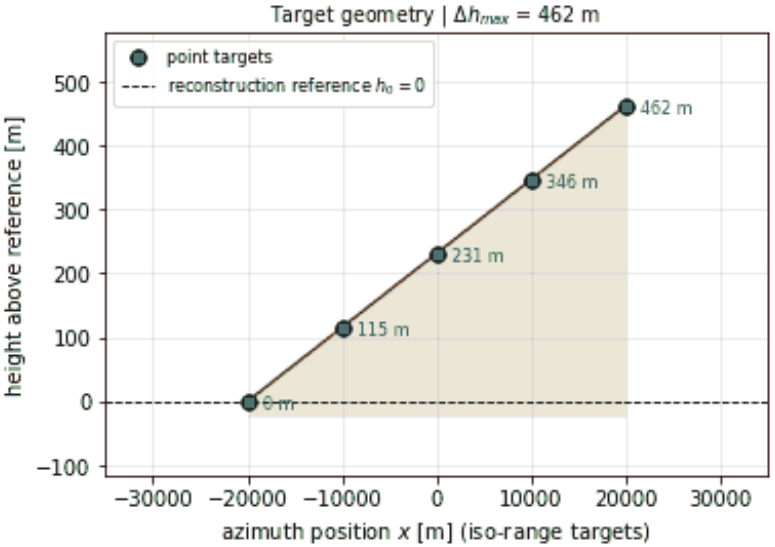



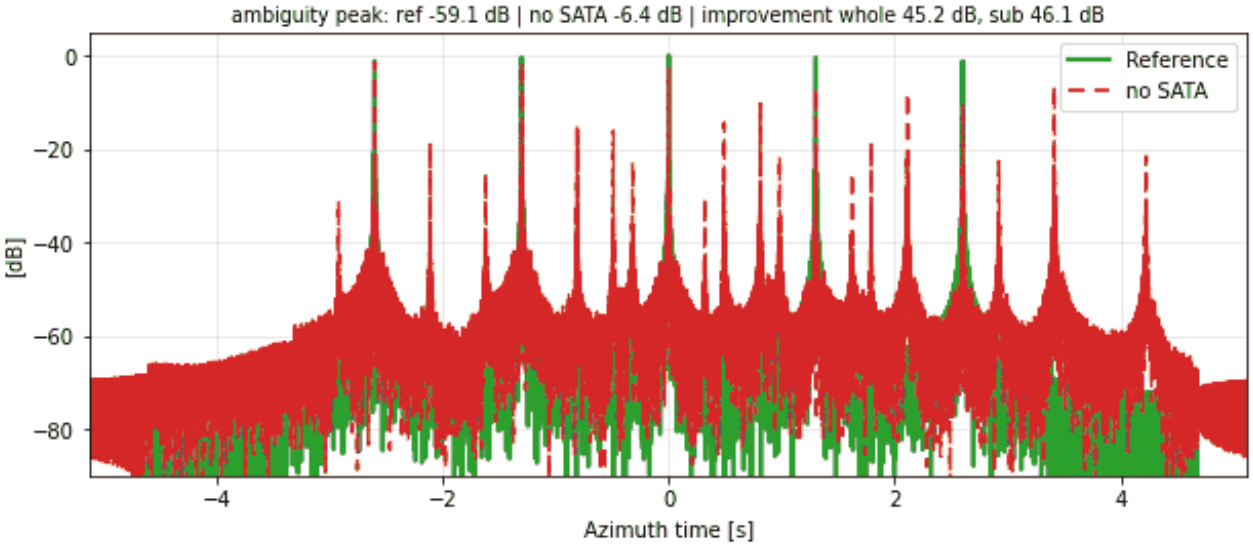



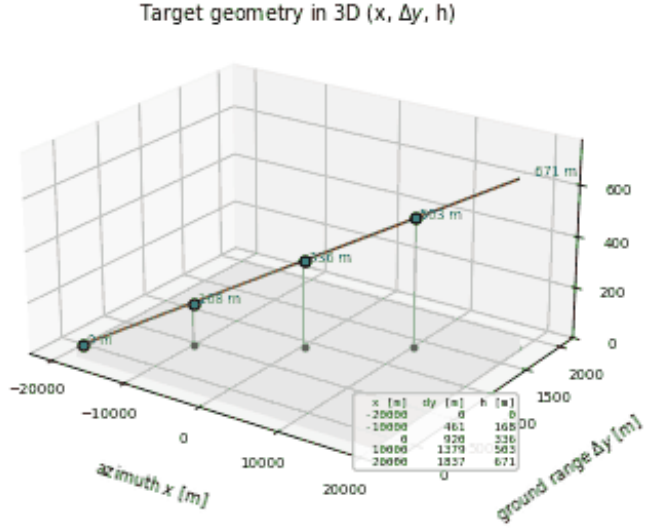



RA-LN-038 | SATA 1D | along-track ramp: N = 5, $\alpha = 40^\circ$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

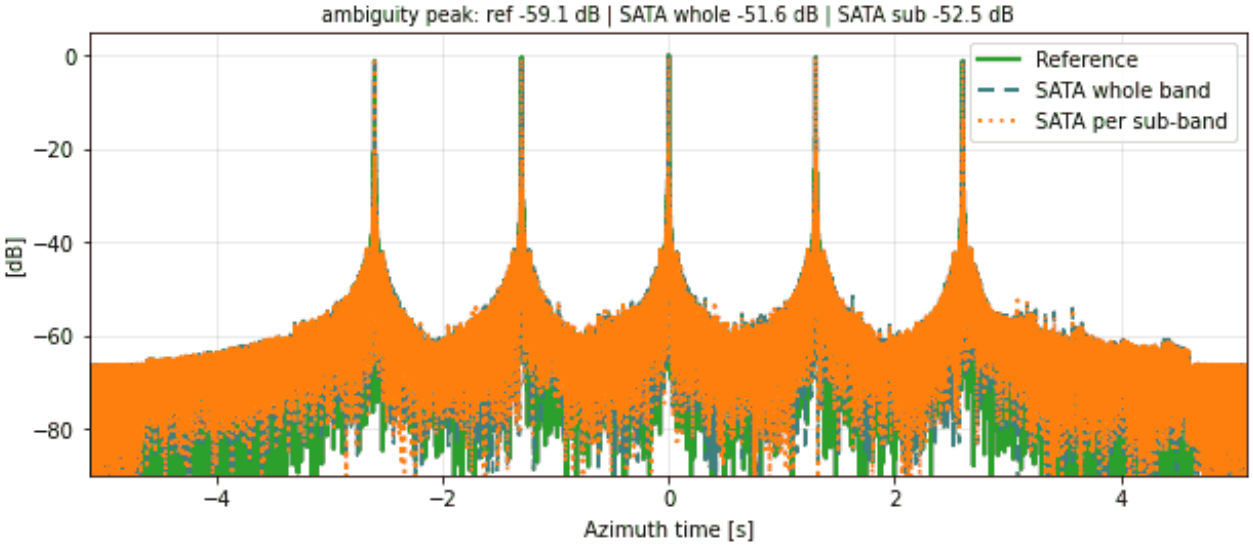


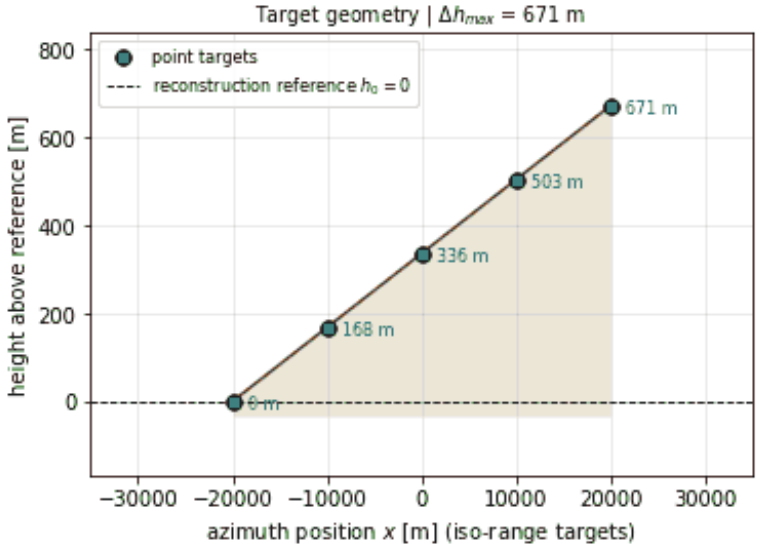



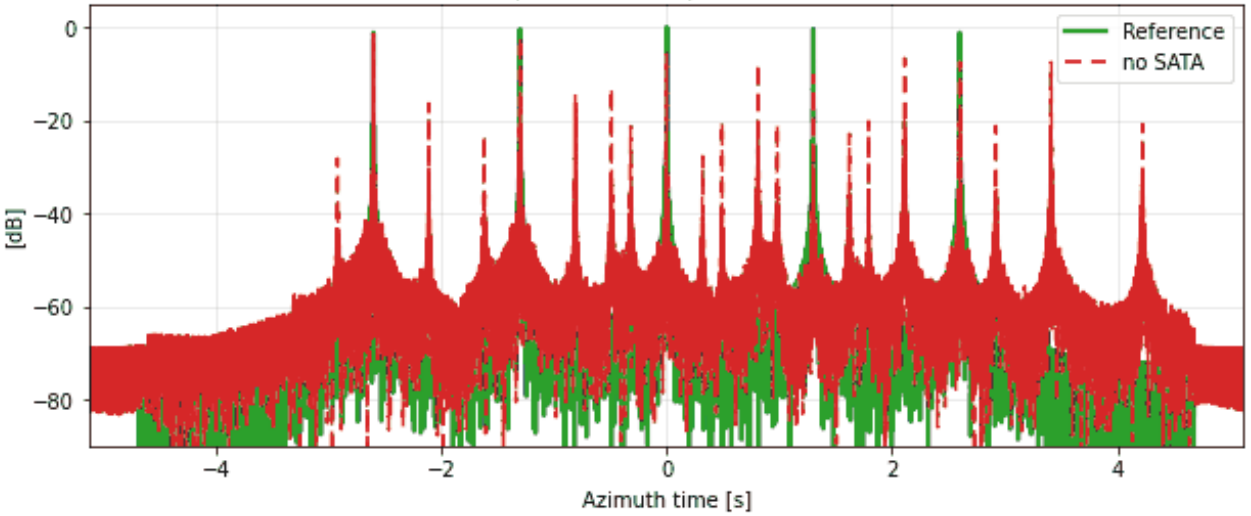



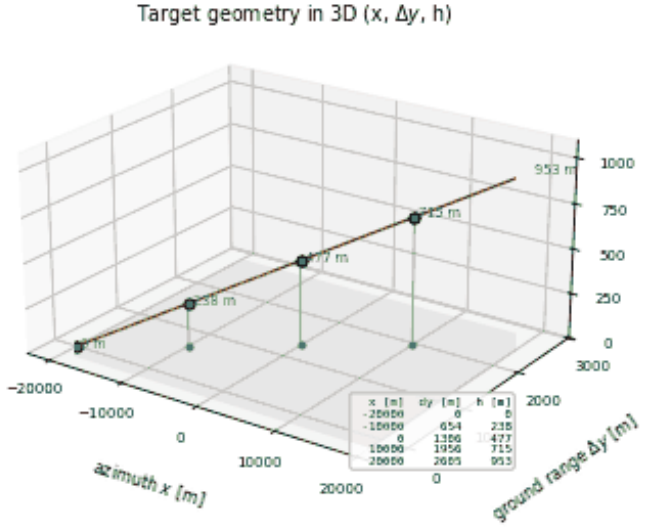



RA-LN-039 | SATA 1D | along-track ramp: N = 5, $\alpha = 50°$ (heights $j \cdot 200\tan\alpha$), targets 10 km apart (large distance), normal heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

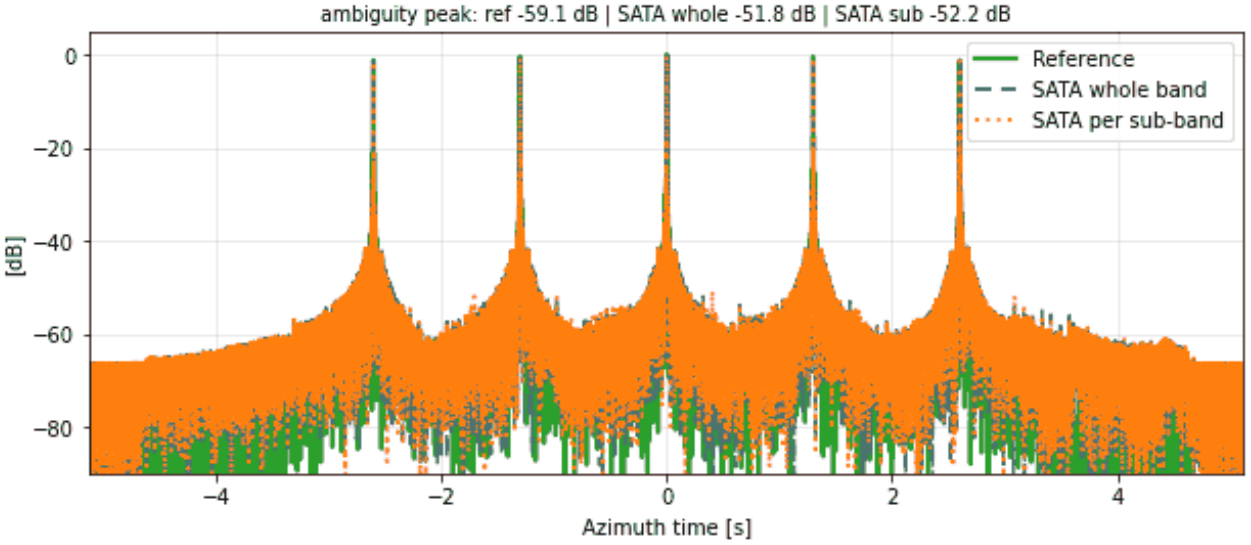


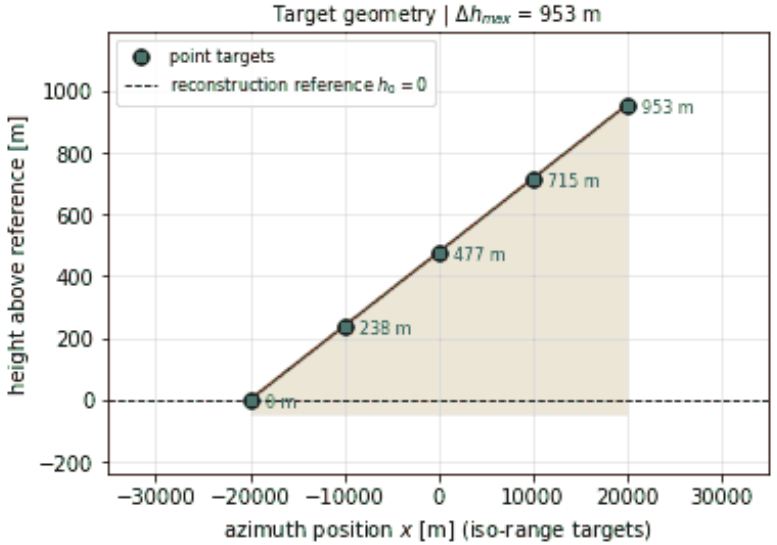



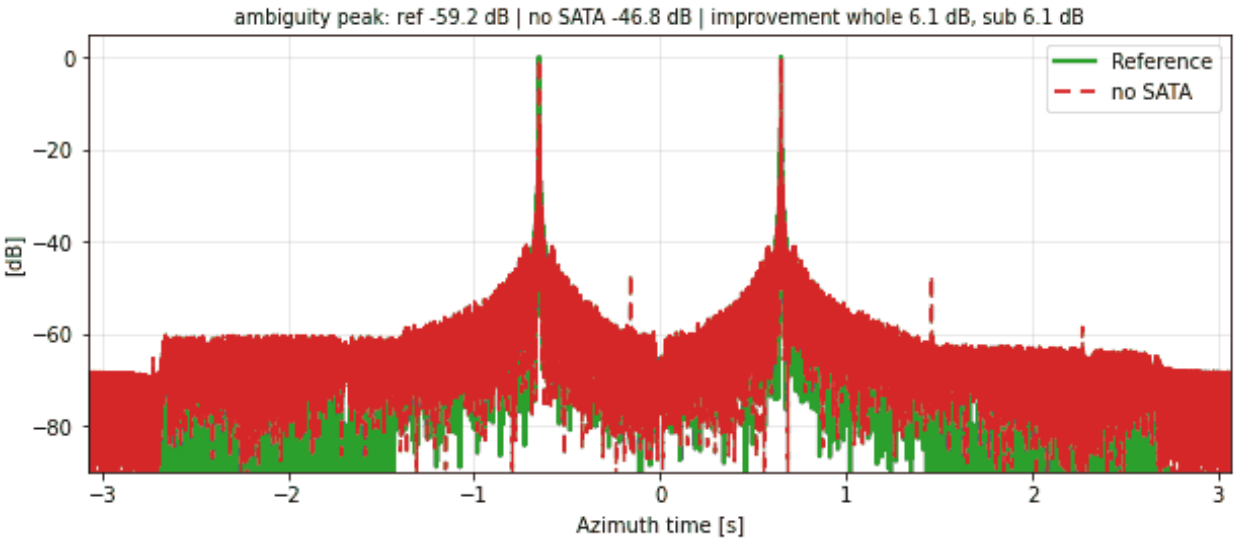



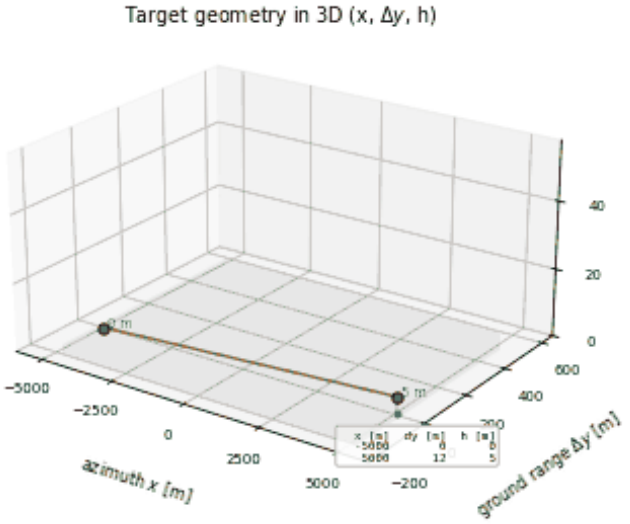



RA-LL-001 | SATA 1D | along-track ramp: N = 2, $\alpha = 0.1°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

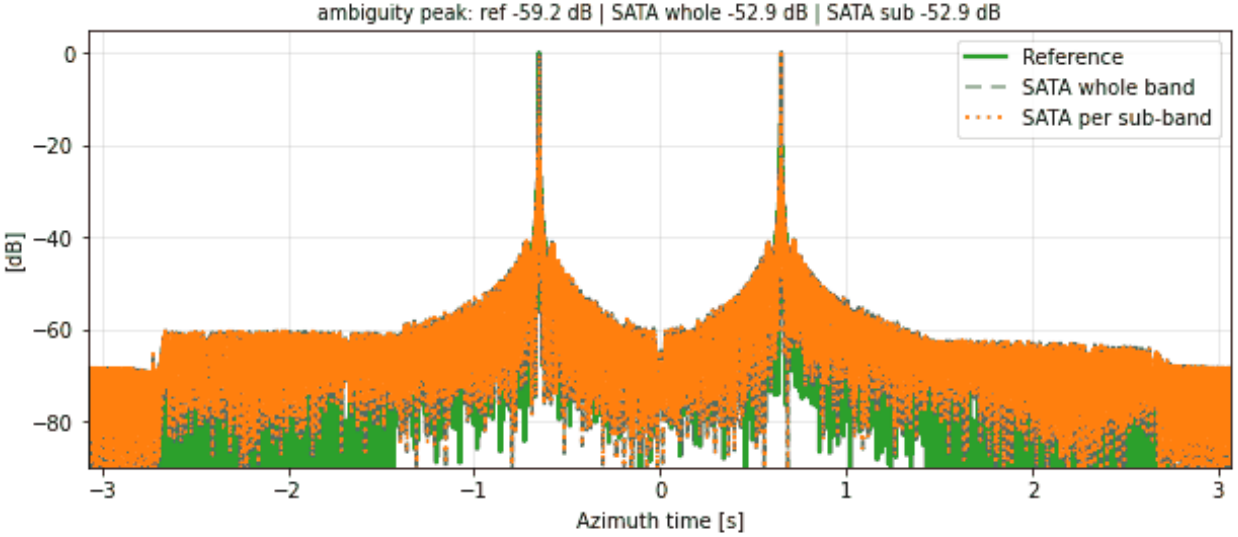

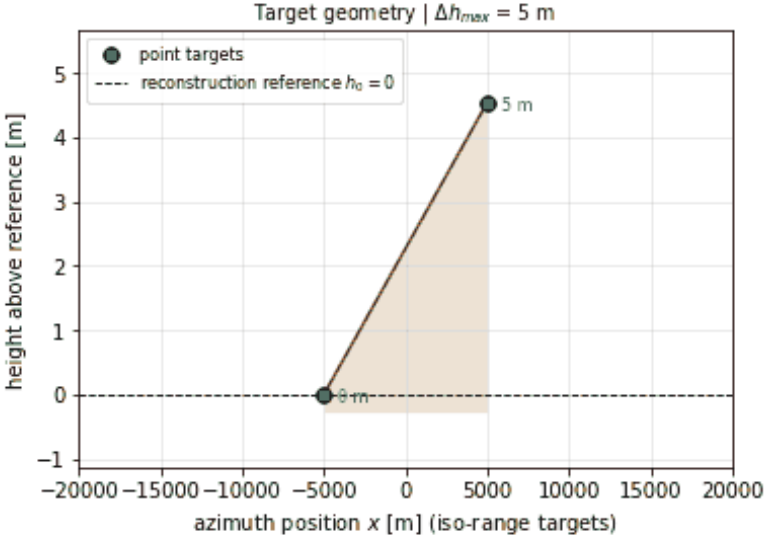



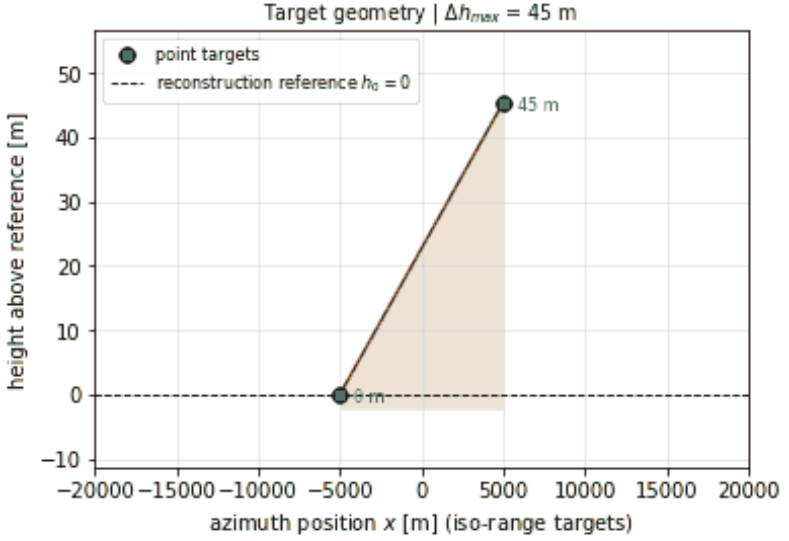



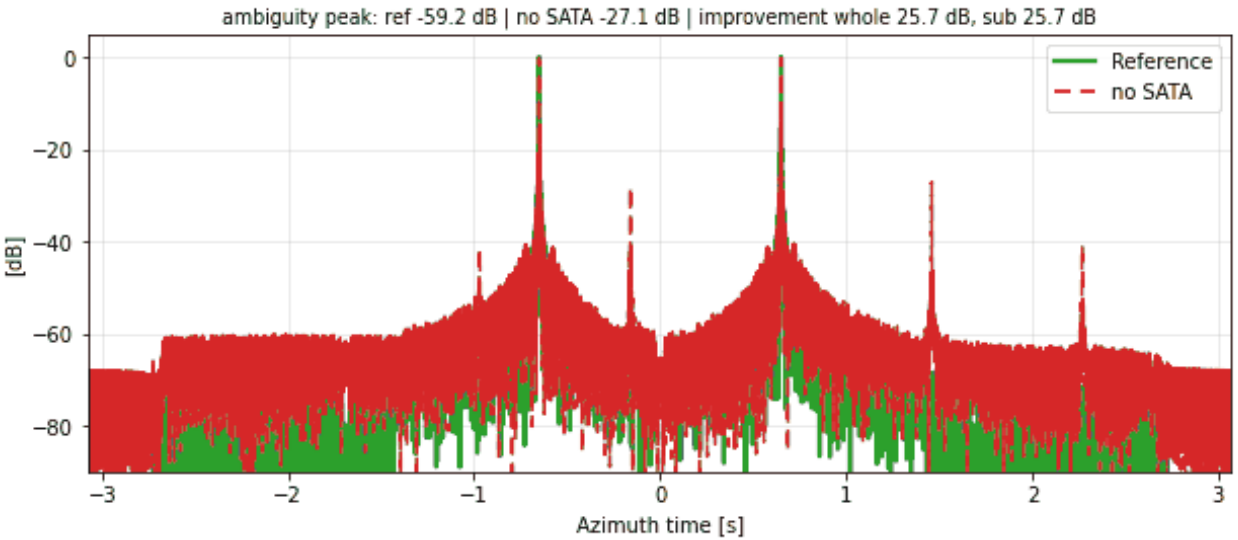

453


RA-LL-002 | SATA 1D | along-track ramp: N = 2, $\alpha = 1^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

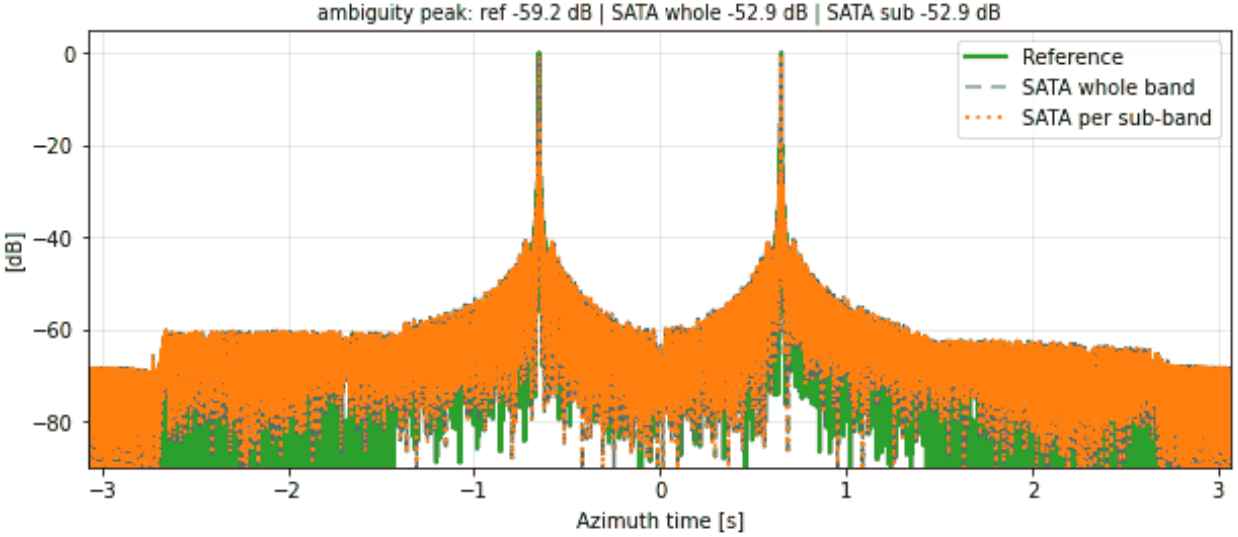





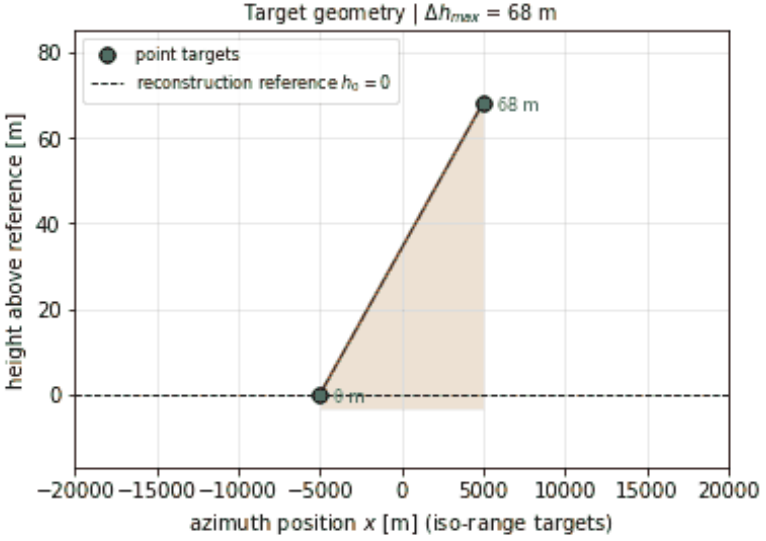


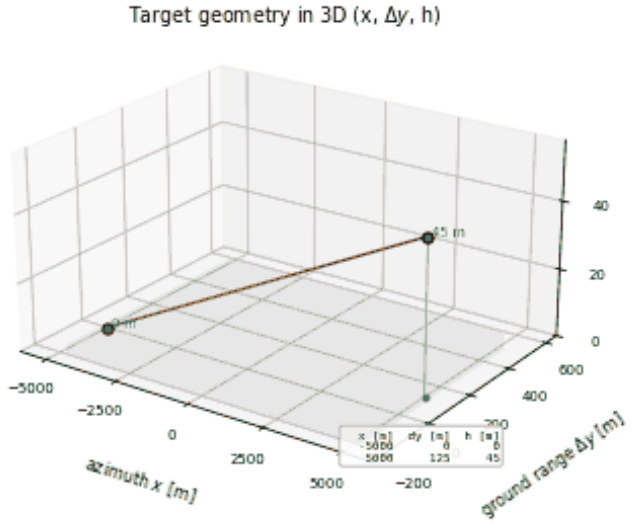
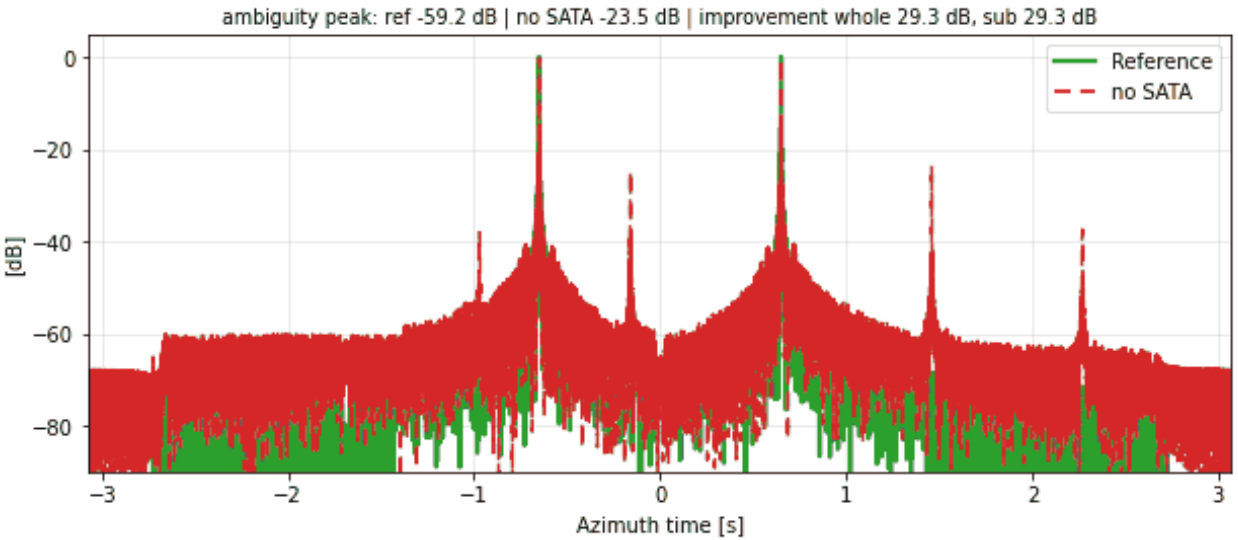



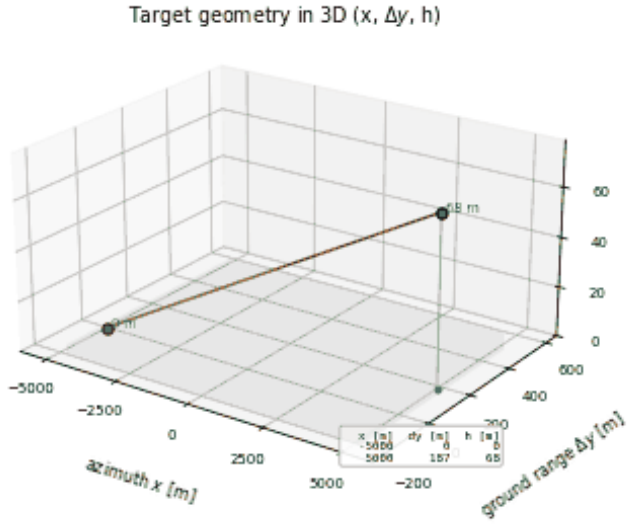

454

RA-LL-003 | SATA 1D | along-track ramp: N = 2, $\alpha = 1.5°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

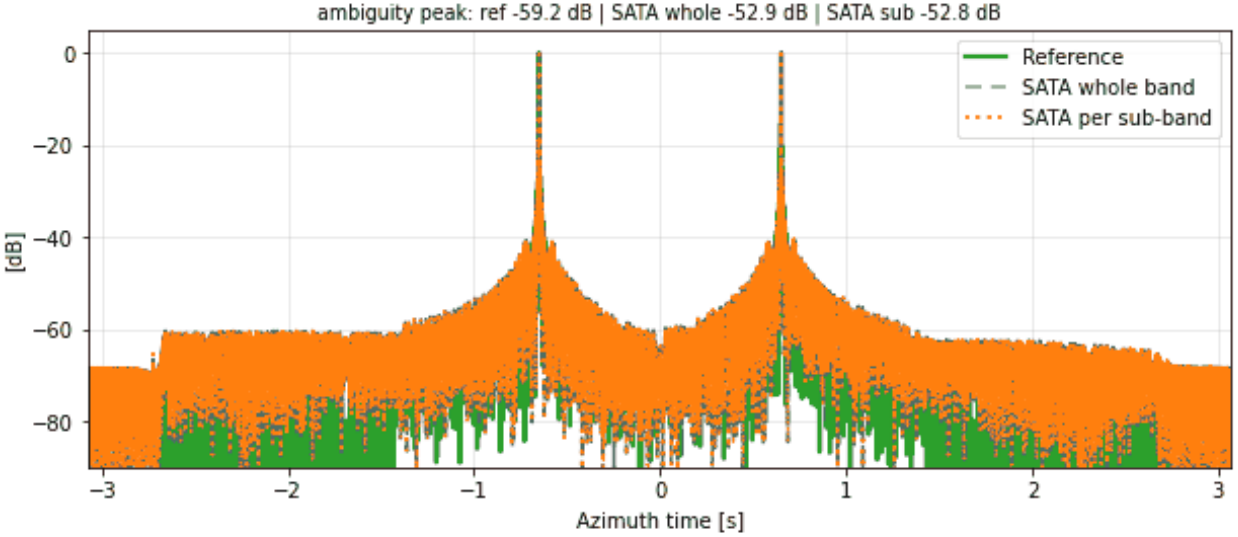





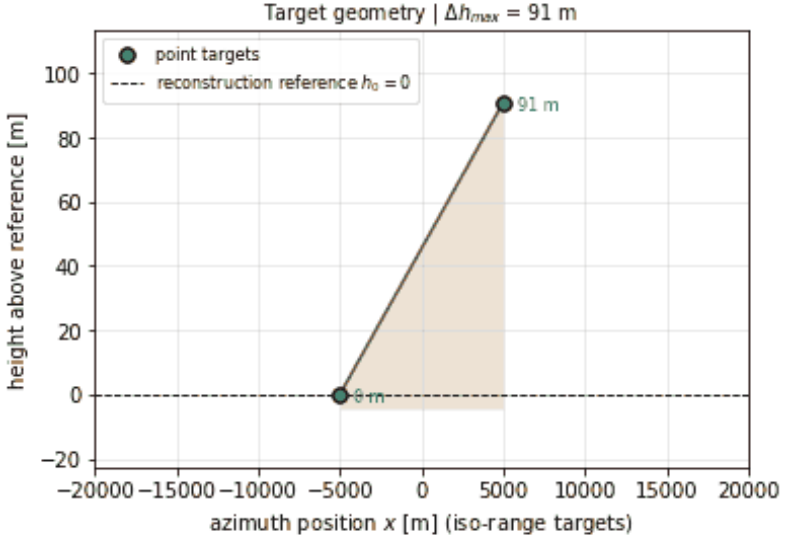



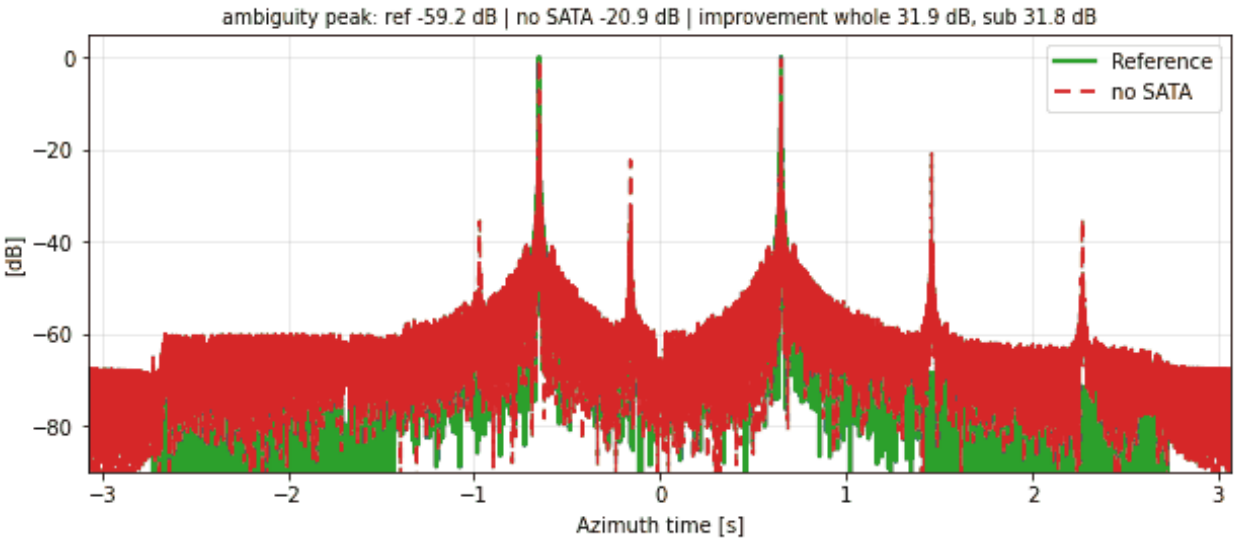



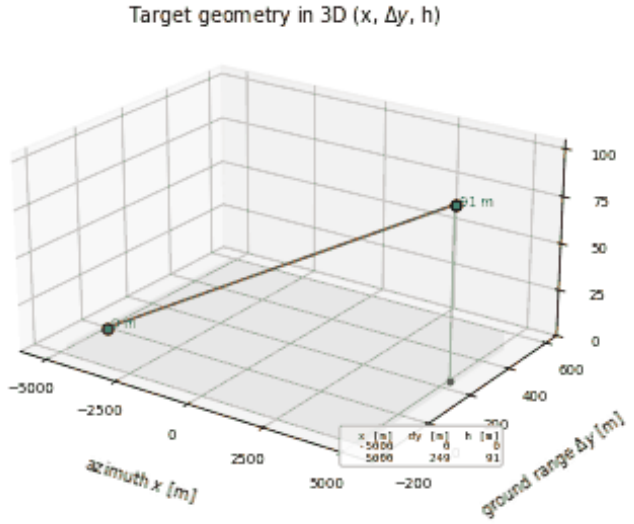

455

RA-LL-004 | SATA 1D | along-track ramp: N = 2, $\alpha = 2°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

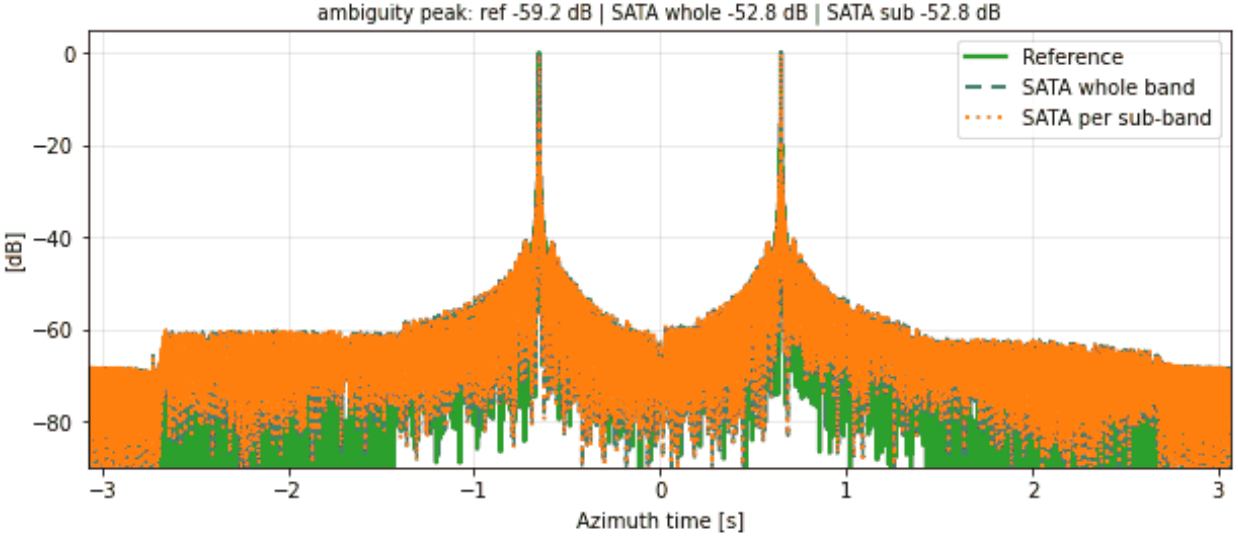





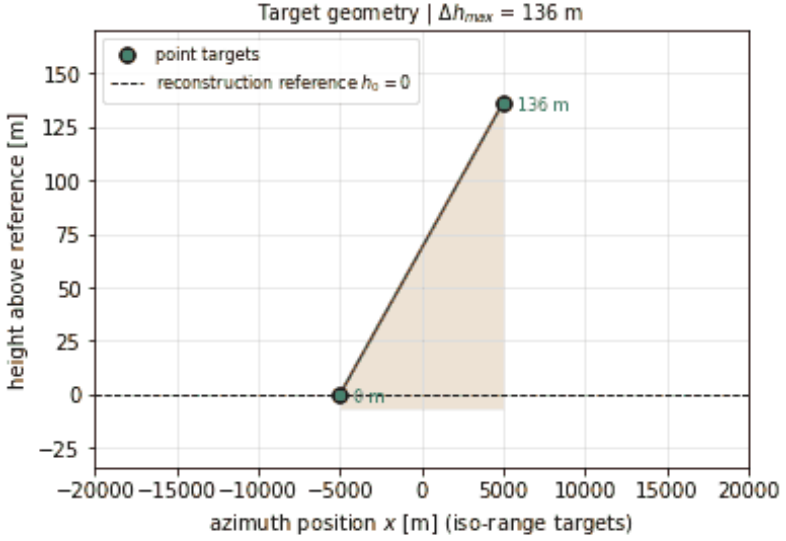



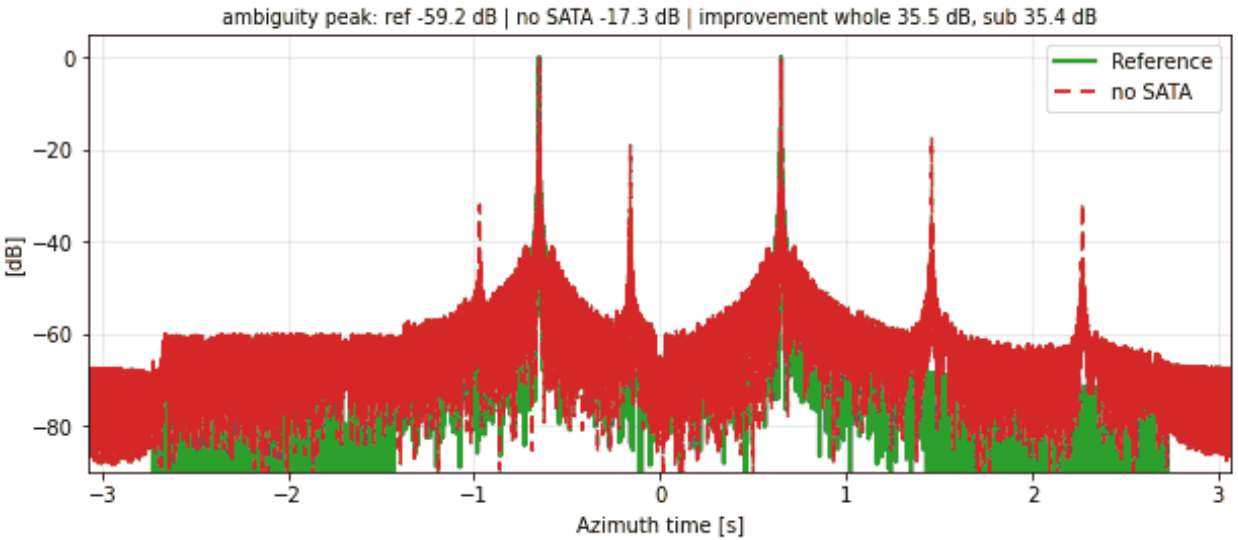



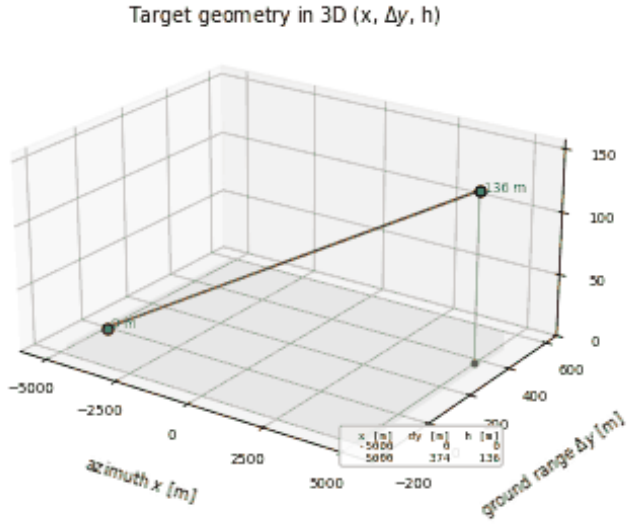
RA-LL-005 | SATA 1D | along-track ramp: N = 2, $\alpha = 3^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

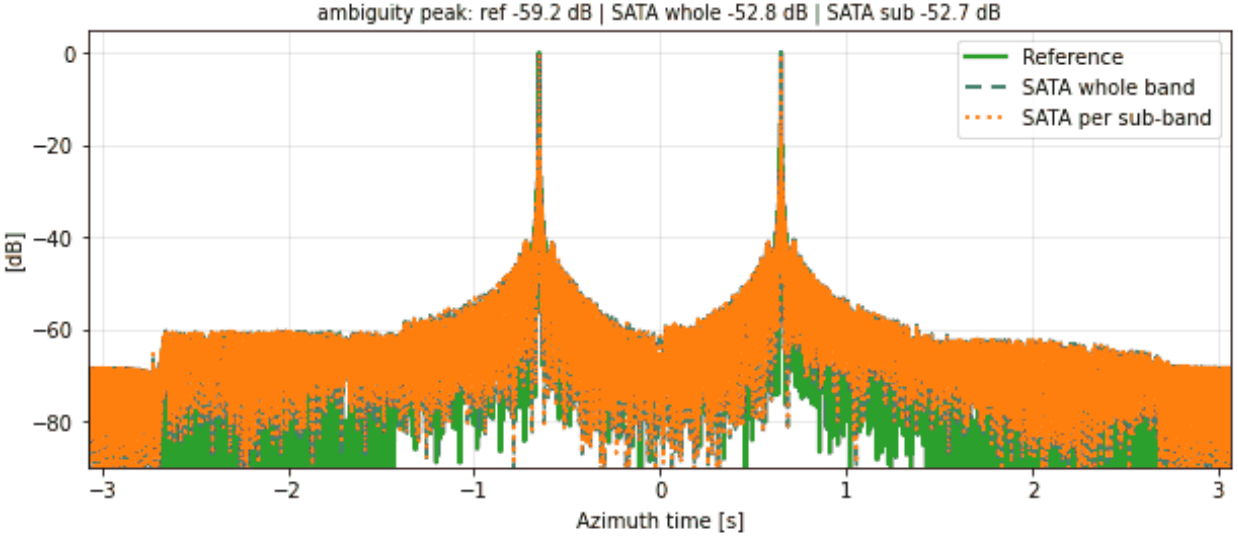






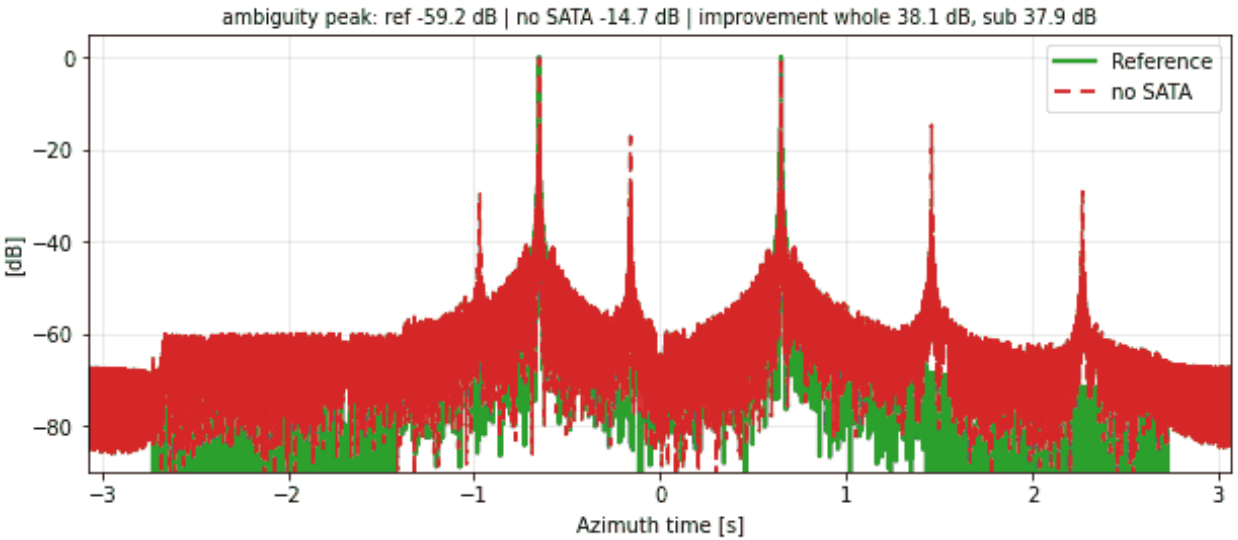



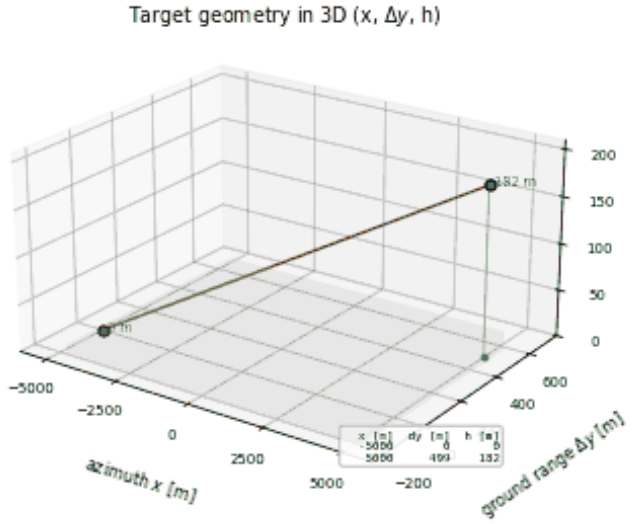



RA-LL-006 | SATA 1D | along-track ramp: N = 2, $\alpha = 4°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

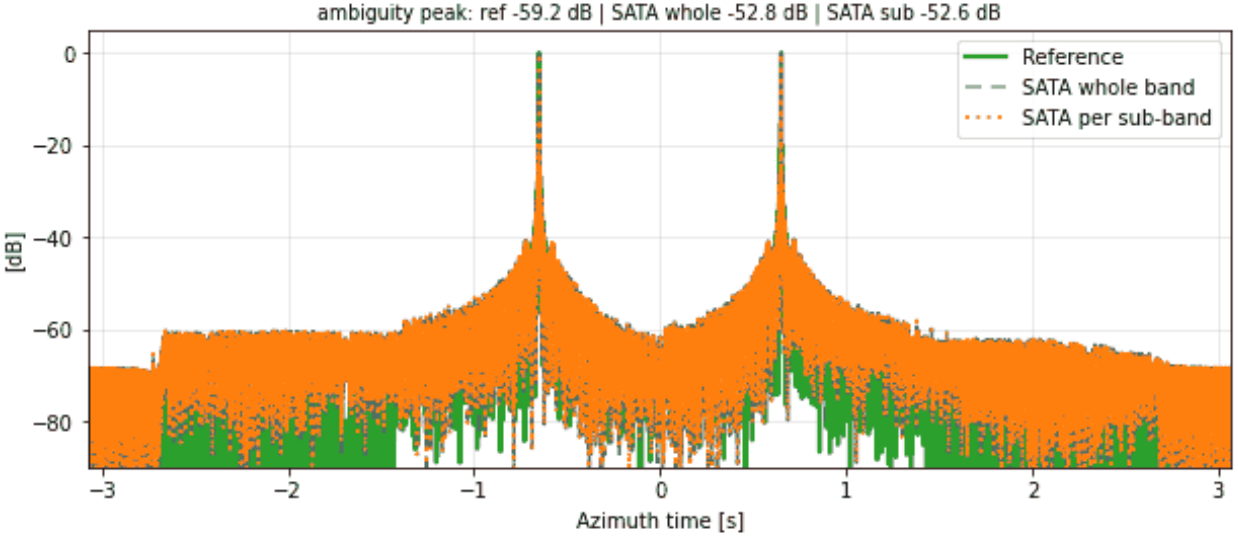

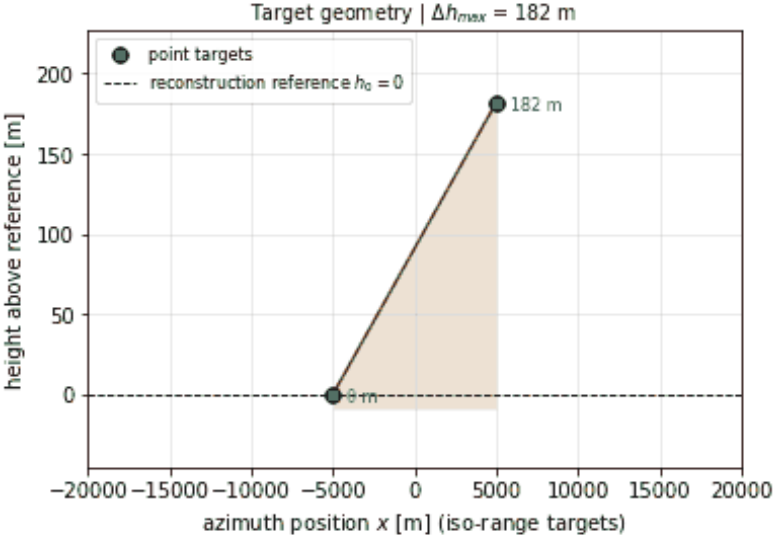



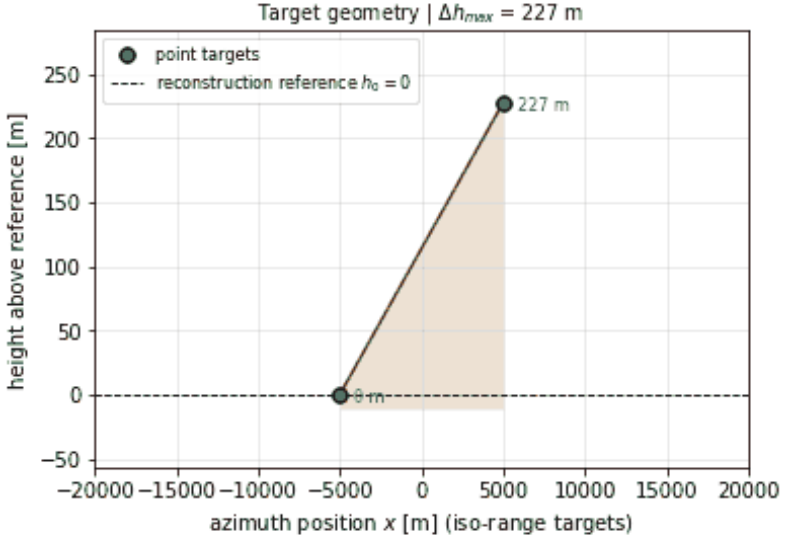



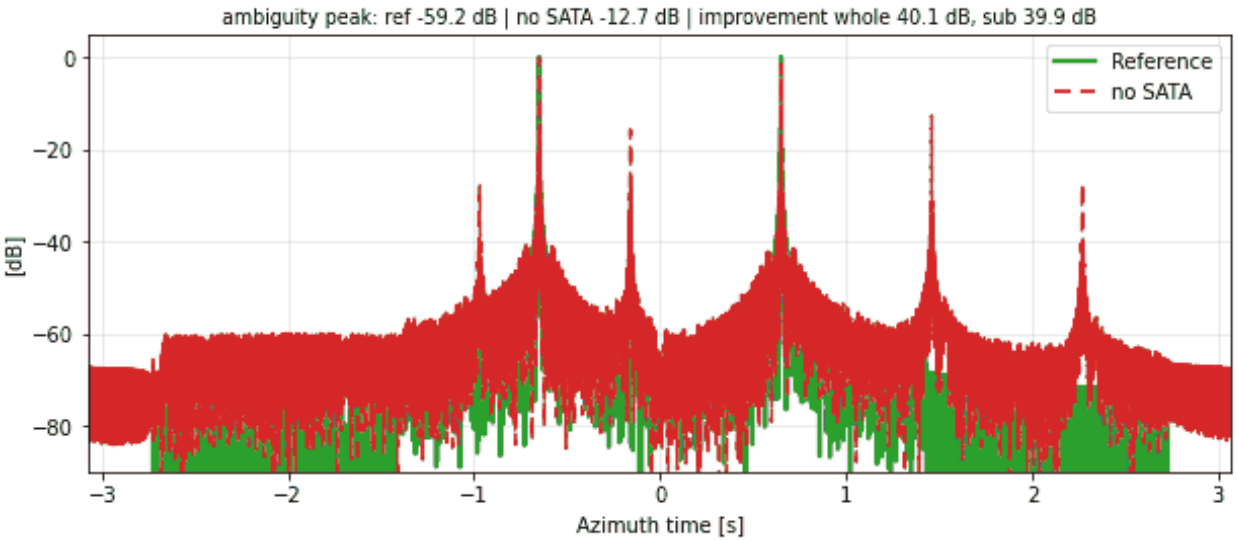



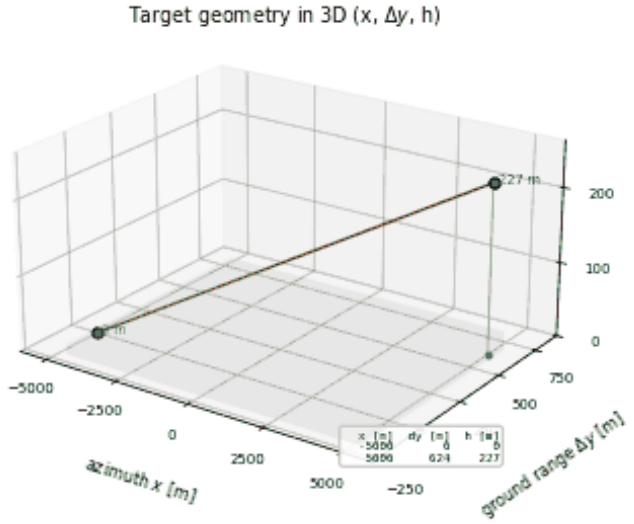

458

RA-LL-007 | SATA 1D | along-track ramp: N = 2, $\alpha = 5^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

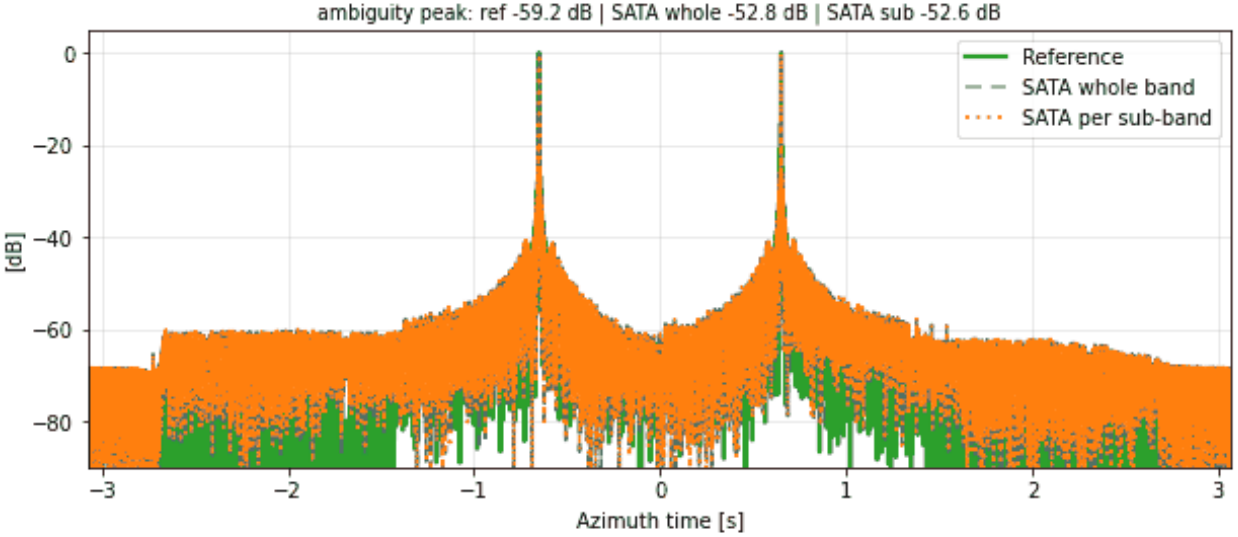





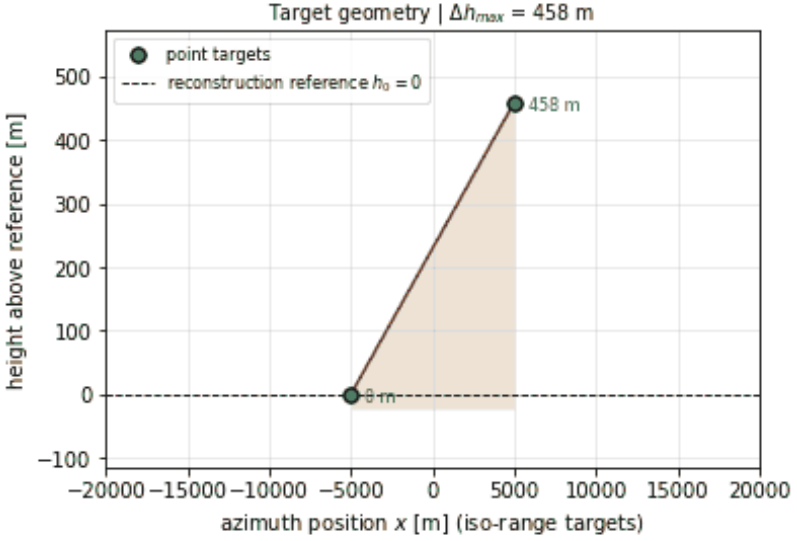



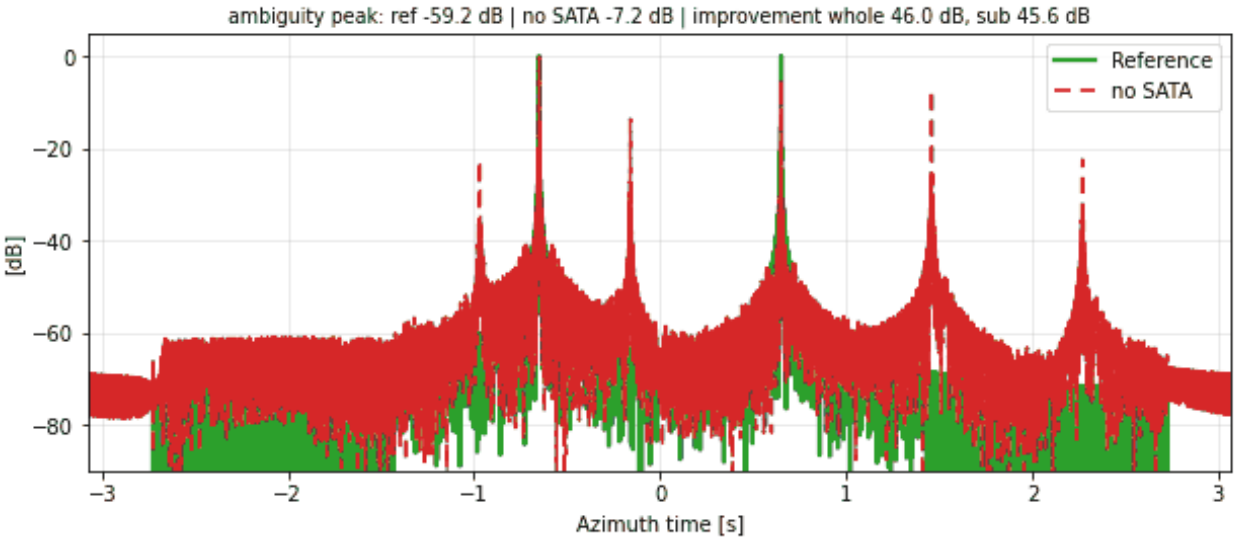



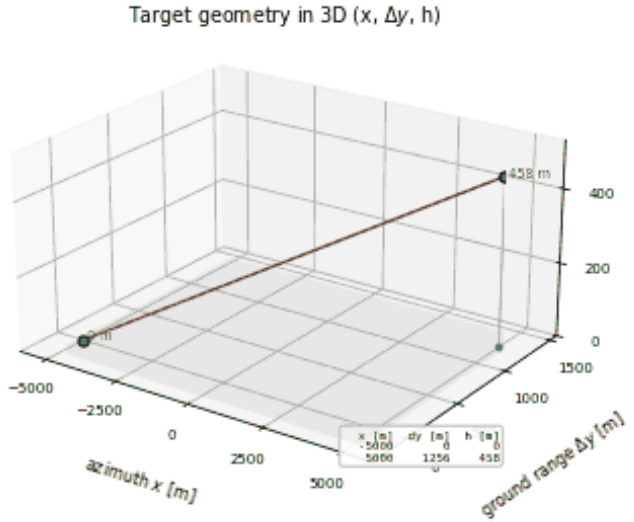

459

RA-LL-008 | SATA 1D | along-track ramp: N = 2, $\alpha = 10^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

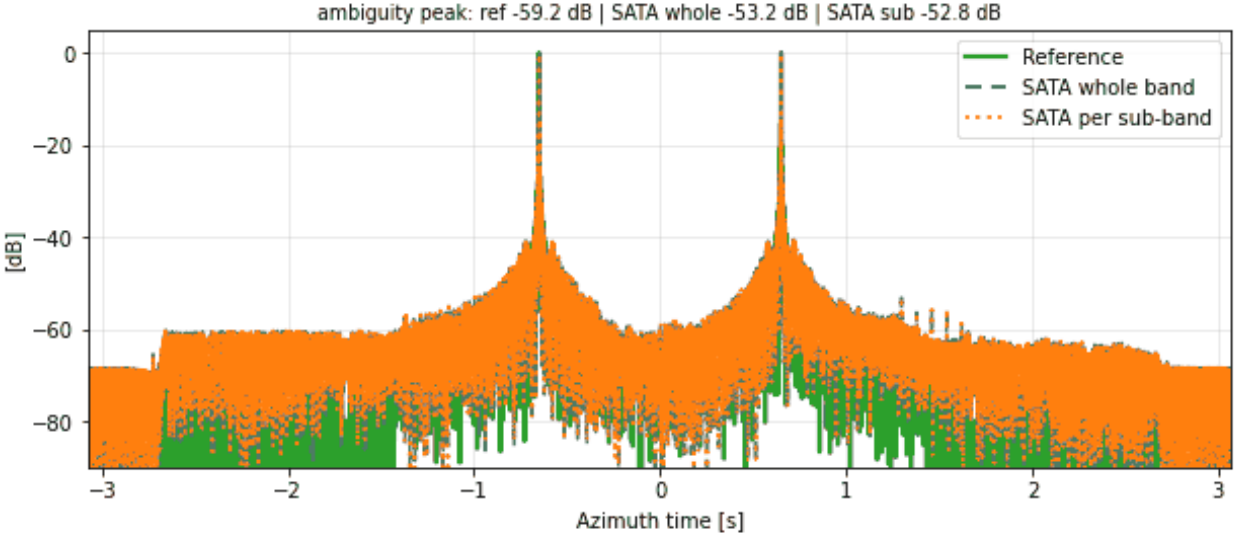






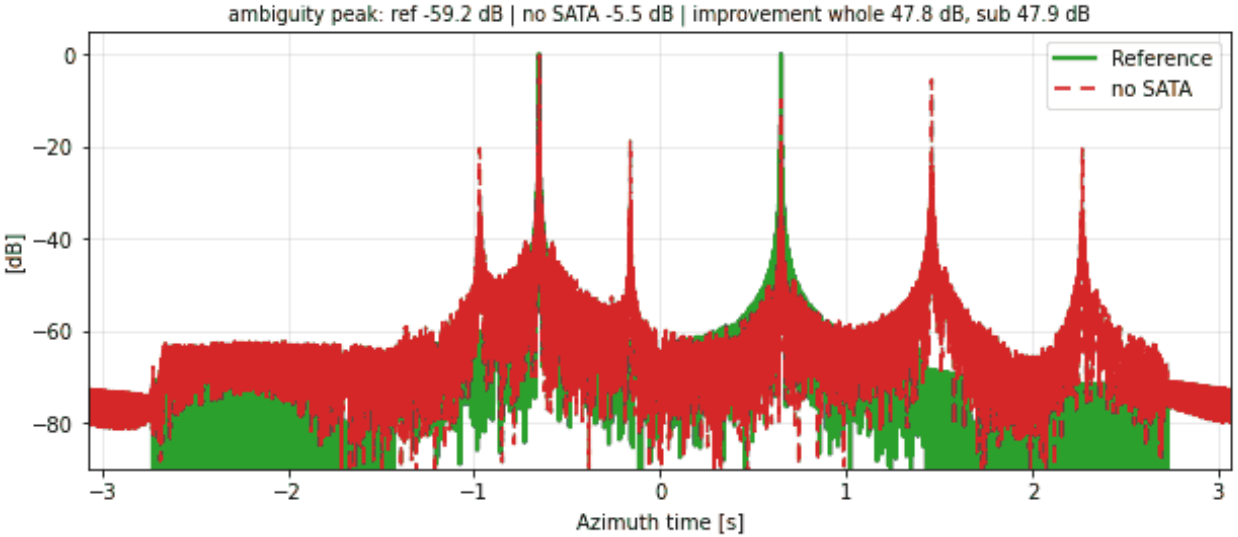



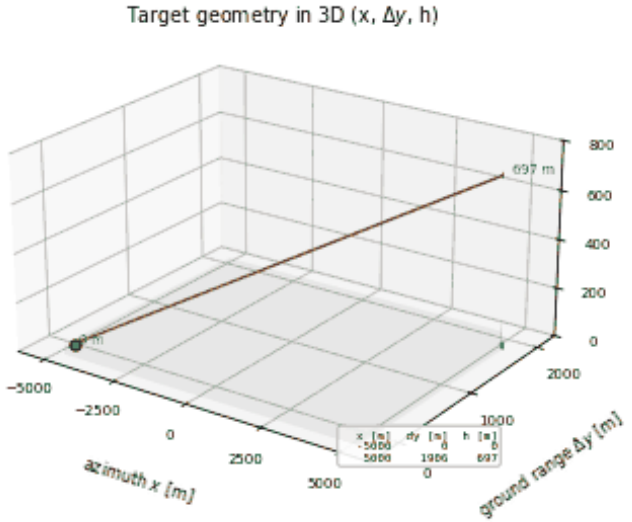



RA-LL-009 | SATA 1D | along-track ramp: N = 2, $\alpha = 15^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

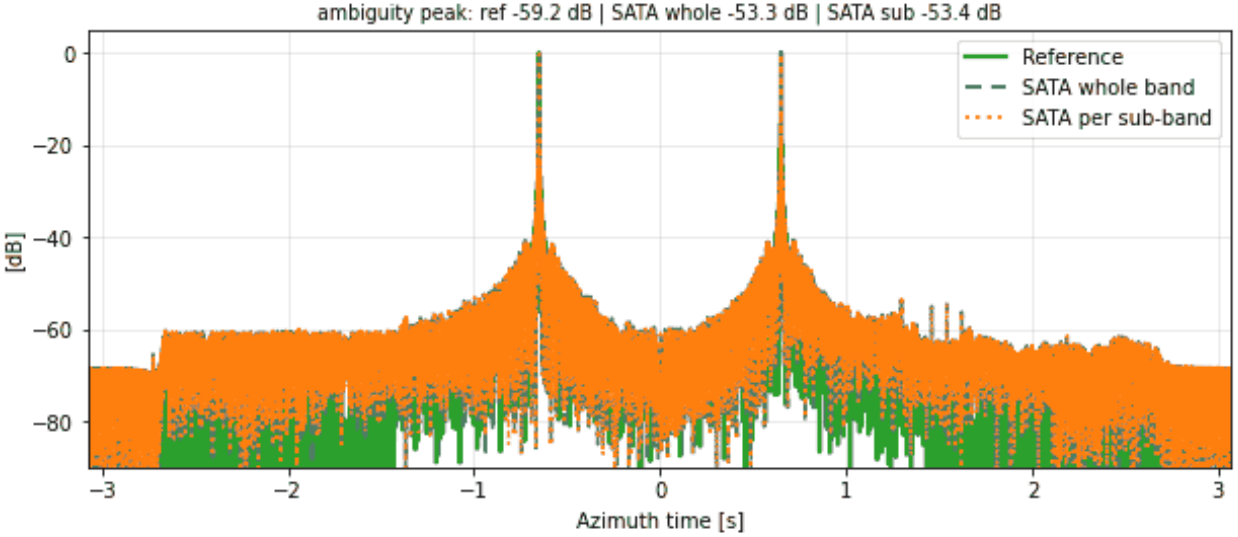


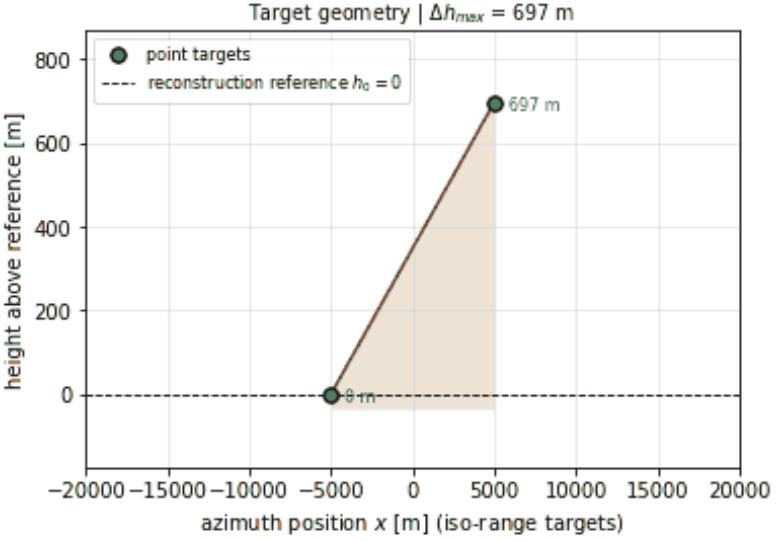



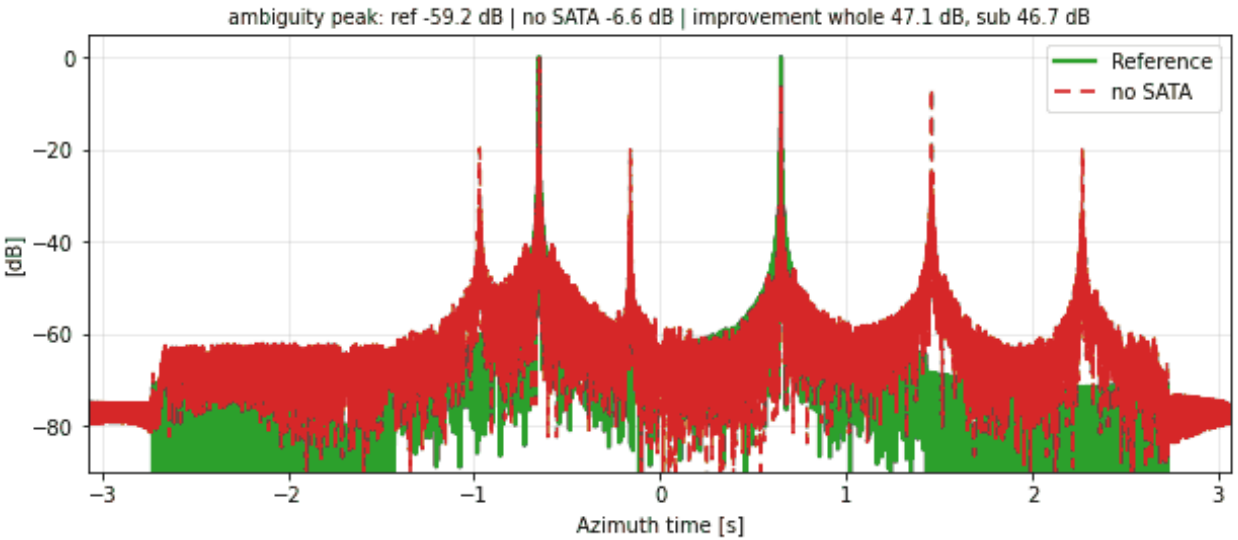



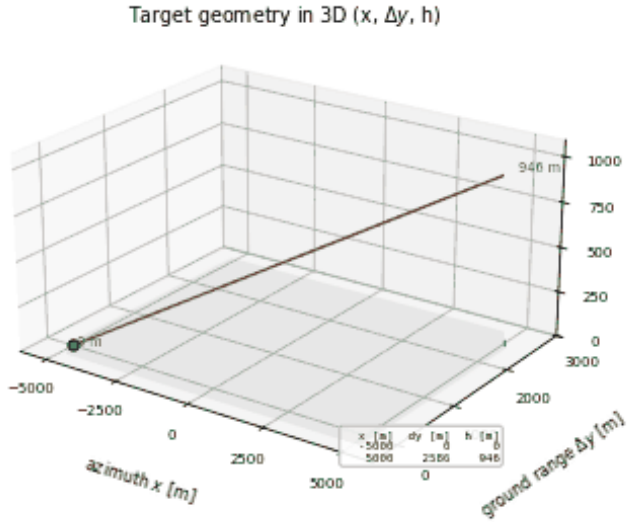



RA-LL-010 | SATA 1D | along-track ramp: N = 2, $\alpha = 20^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

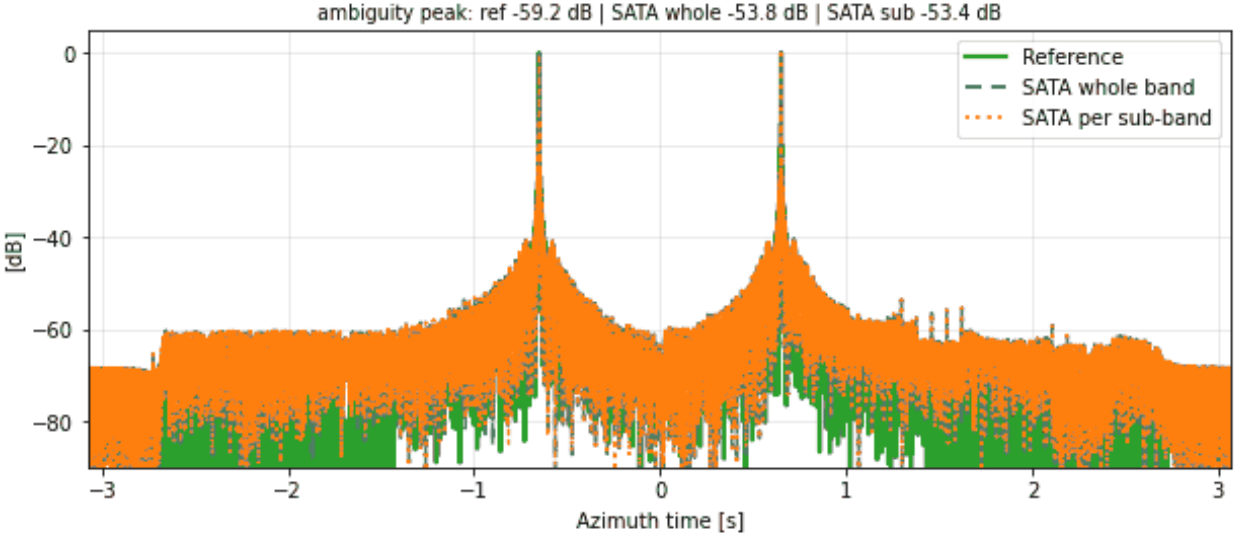

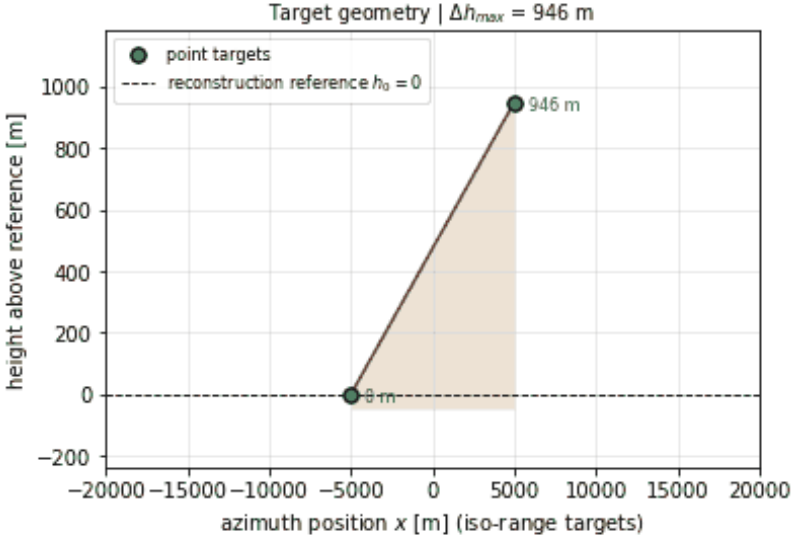



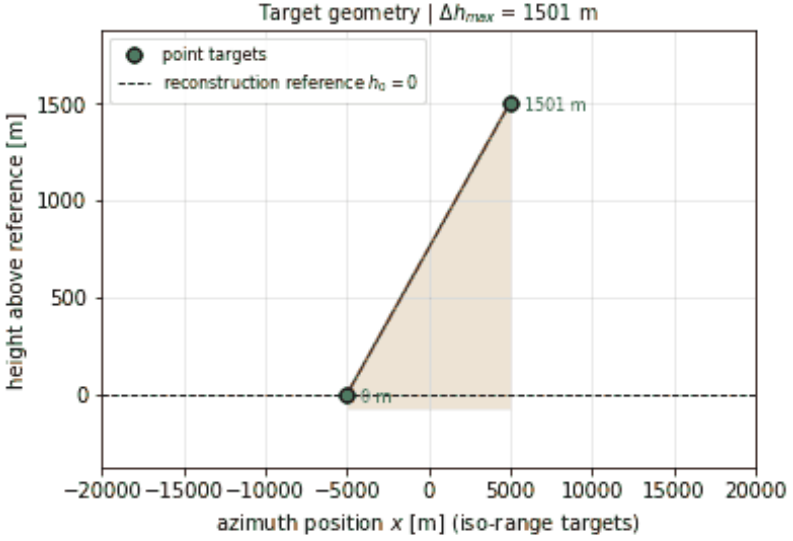



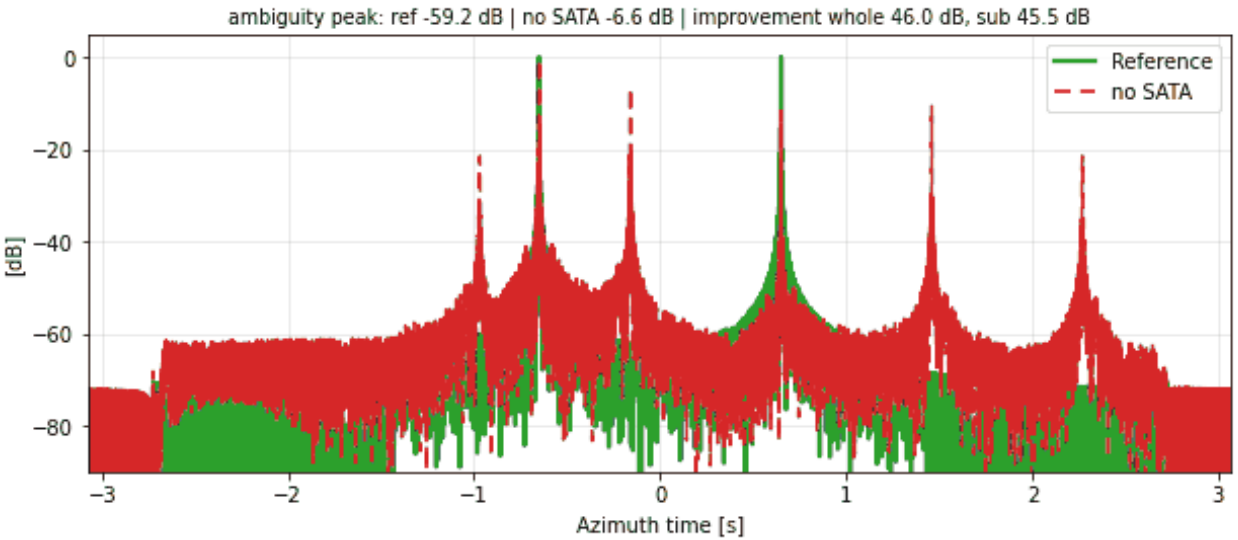



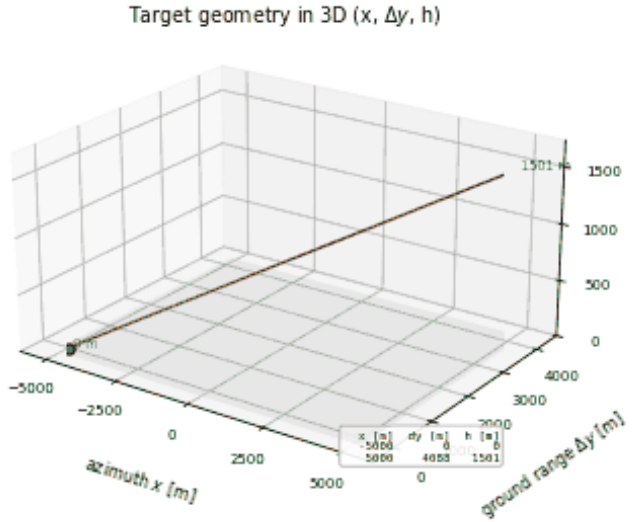
RA-LL-011 | SATA 1D | along-track ramp: N = 2, $\alpha = 30^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

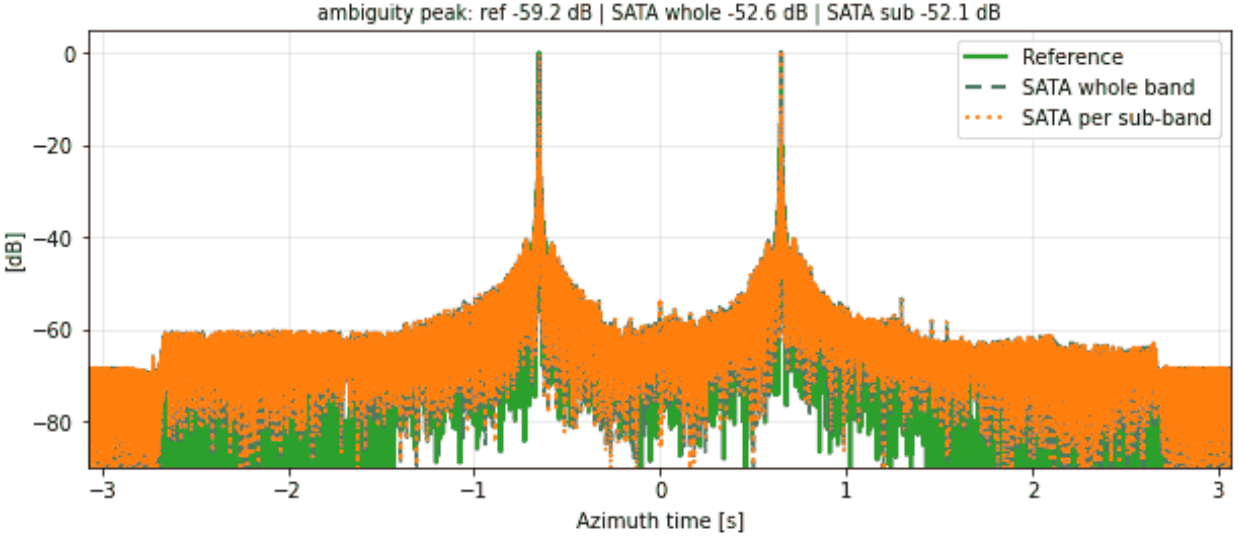





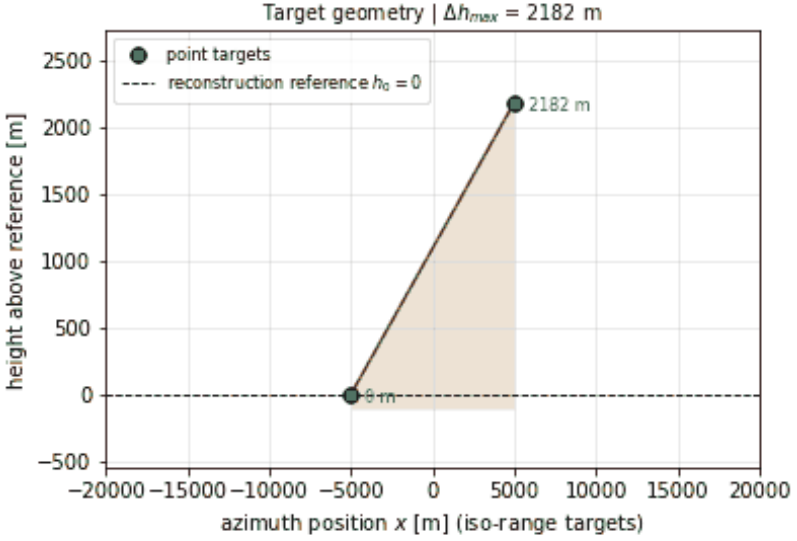



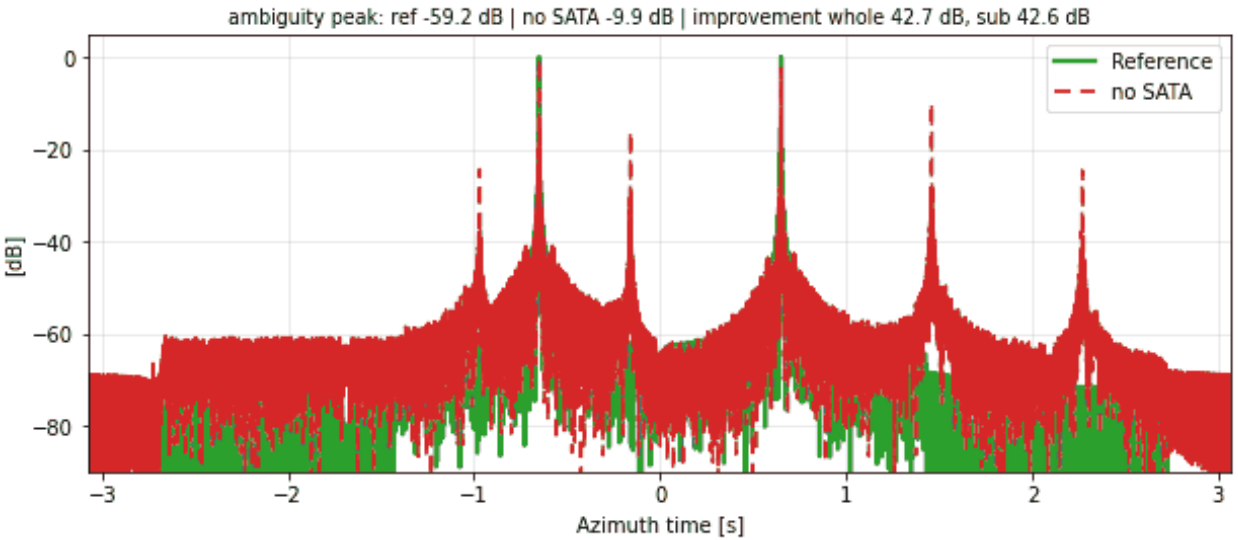

463


RA-LL-012 | SATA 1D | along-track ramp: N = 2, $\alpha = 40°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

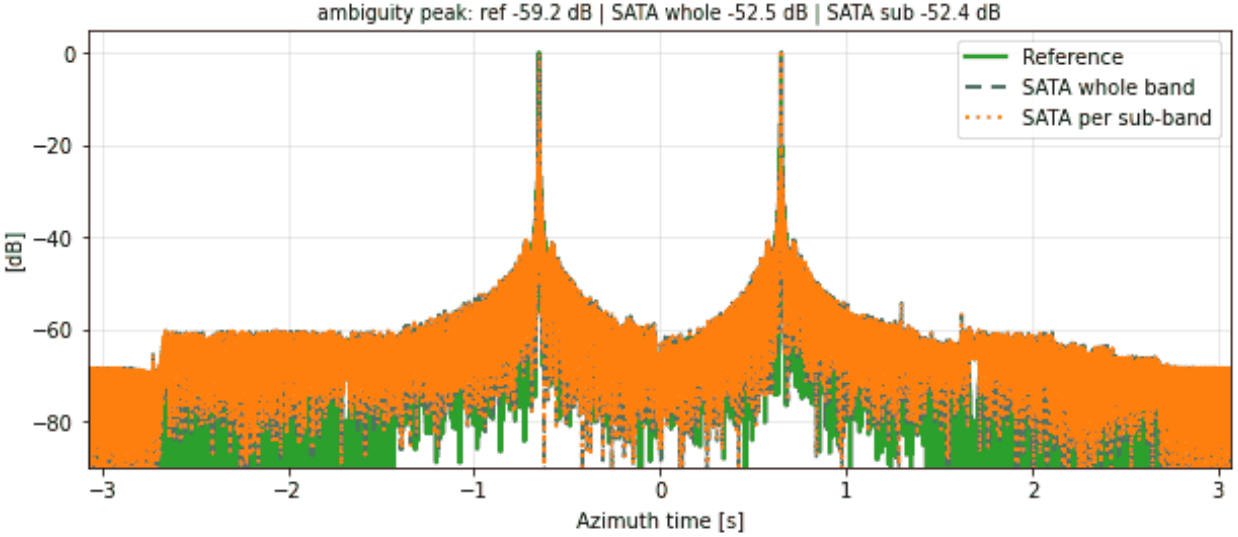






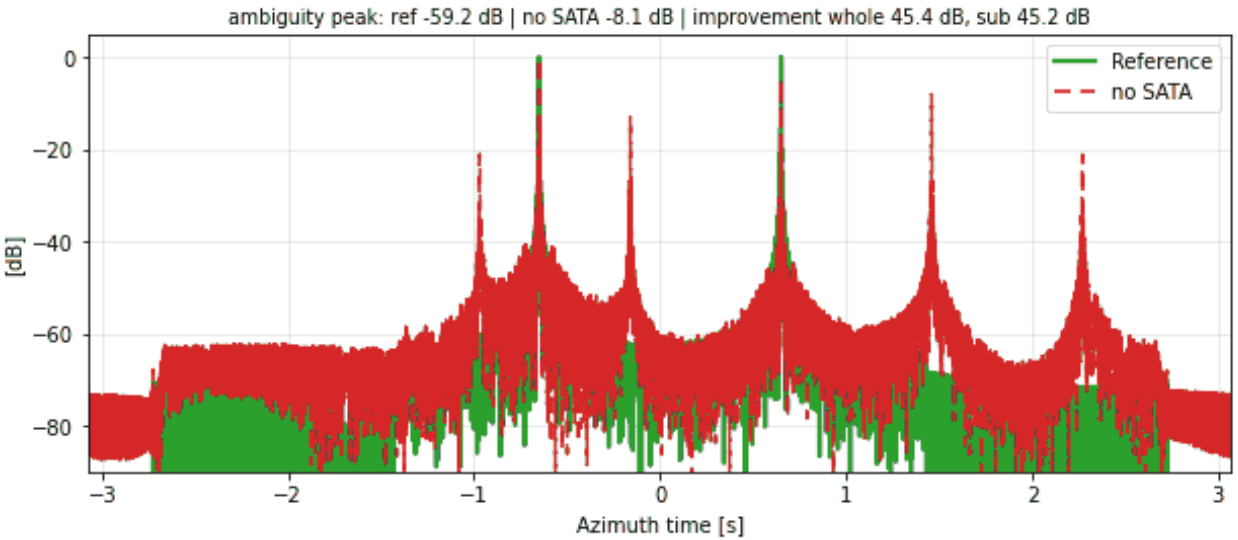


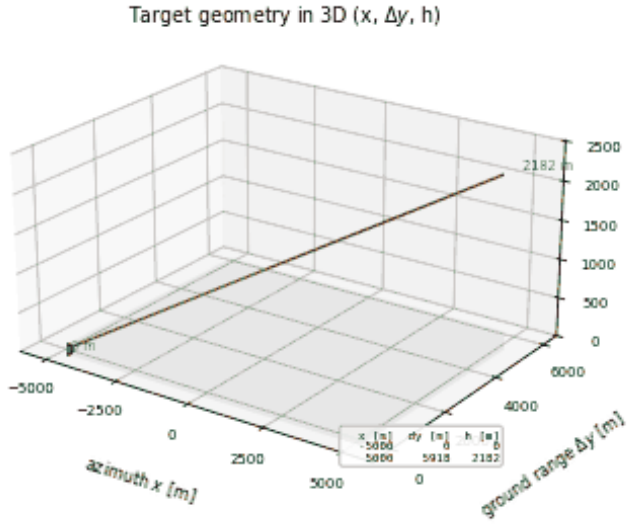
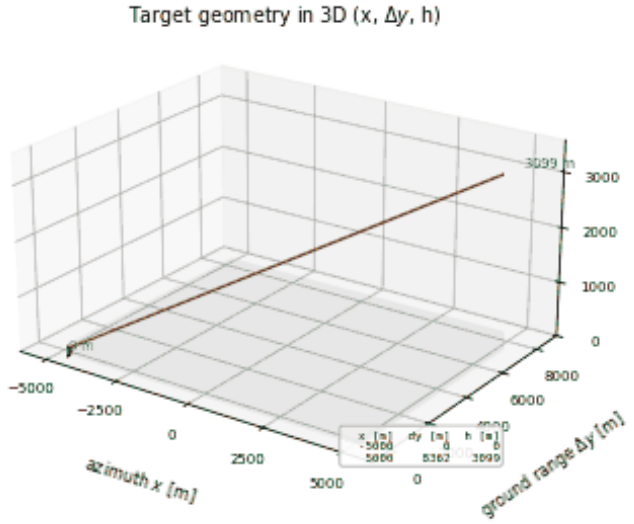



RA-LL-013 | SATA 1D | along-track ramp: N = 2, $\alpha = 50^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

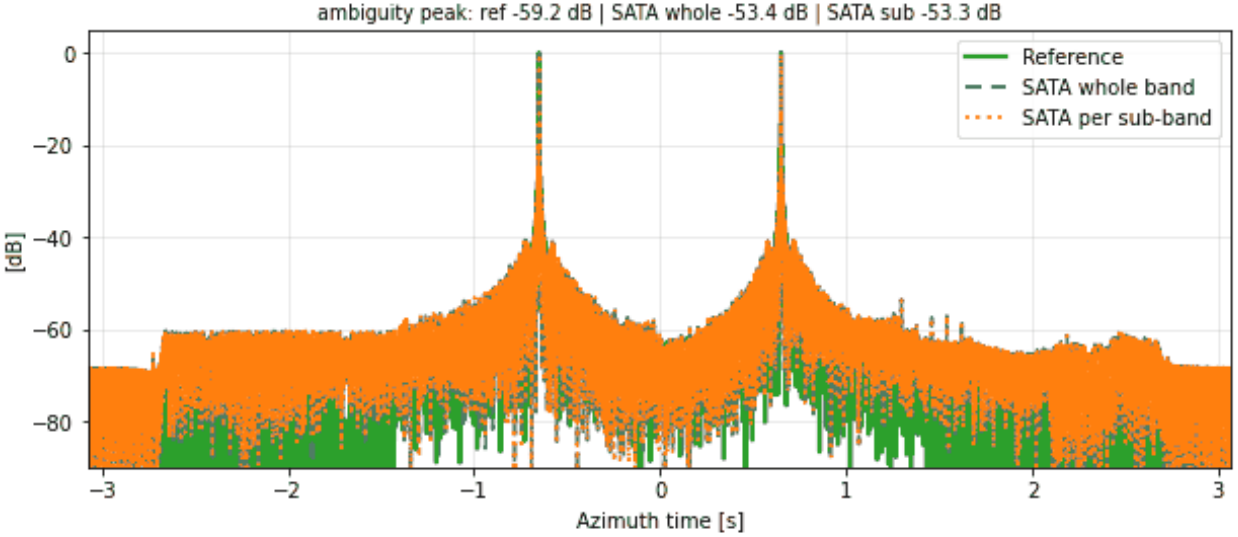


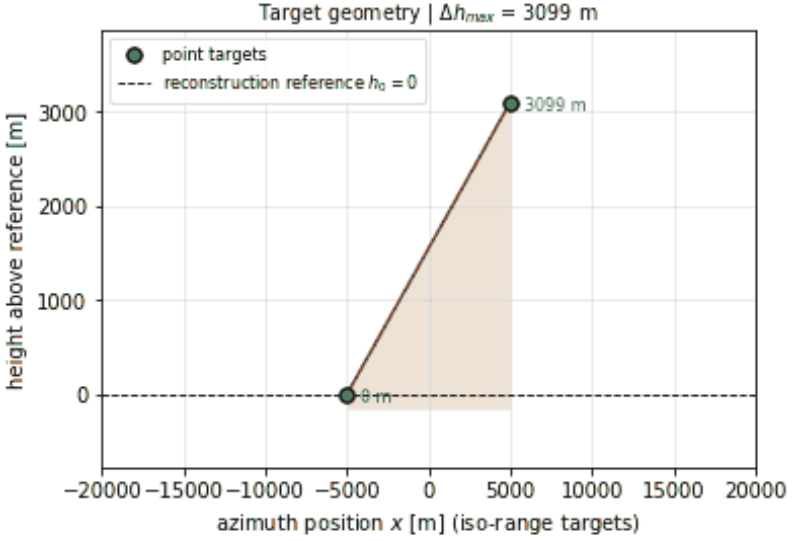



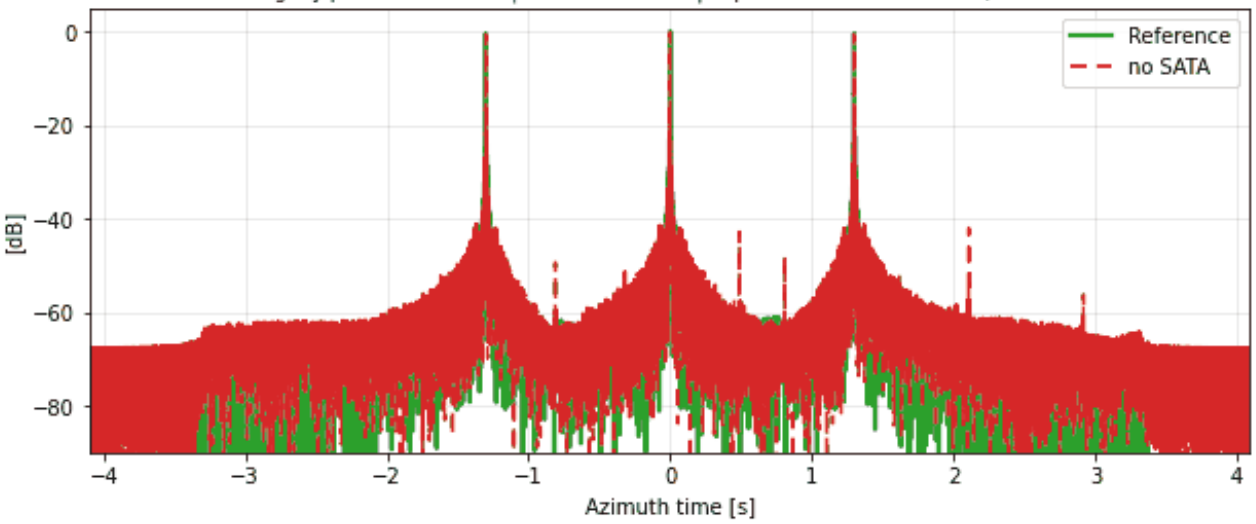



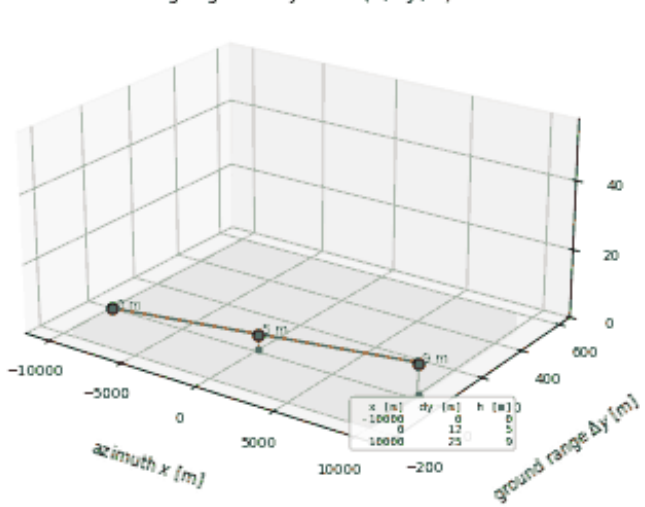



RA-LL-014 | SATA 1D | along-track ramp: N = 3, $\alpha = 0.1°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

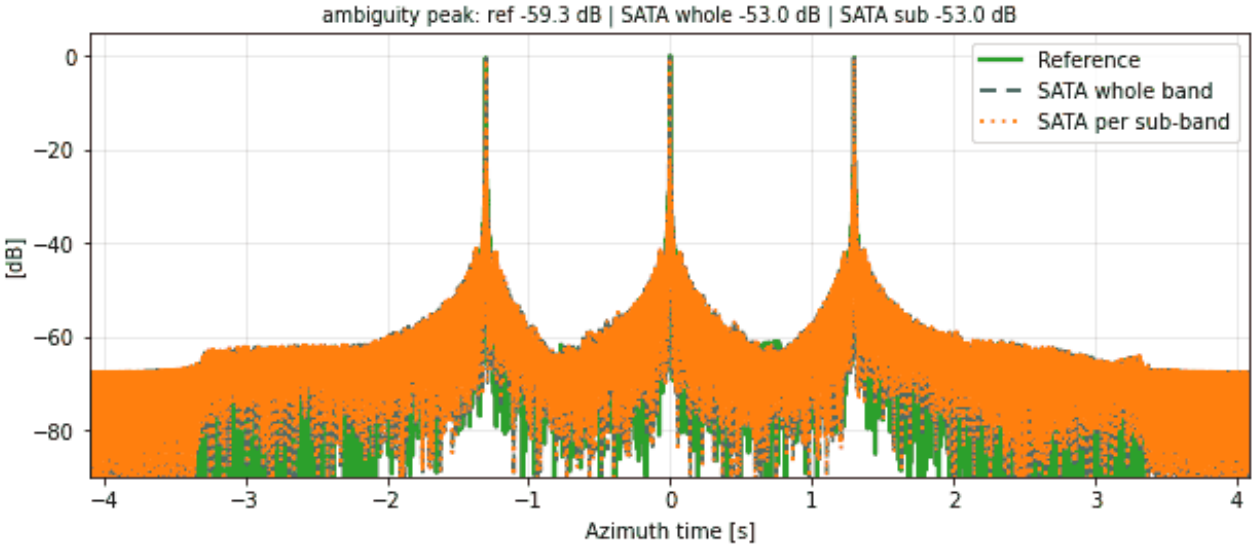

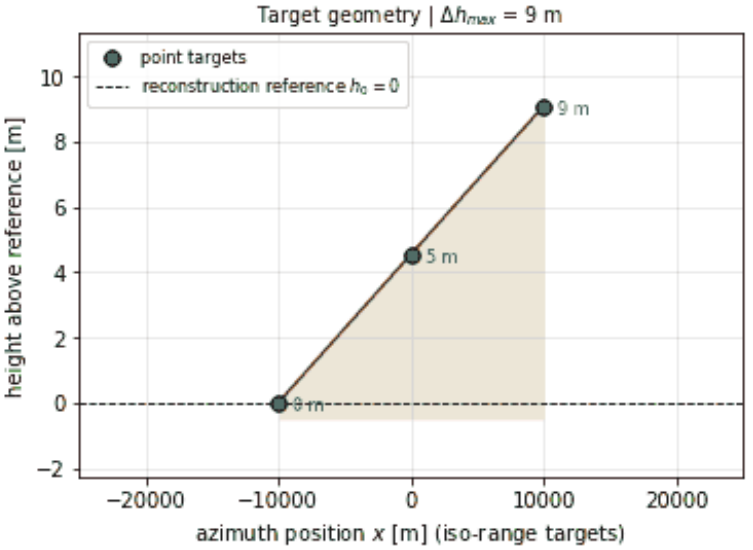



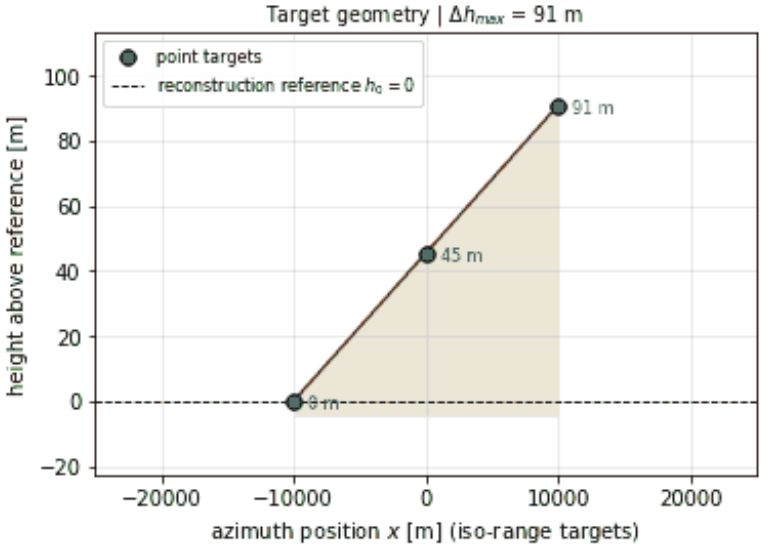



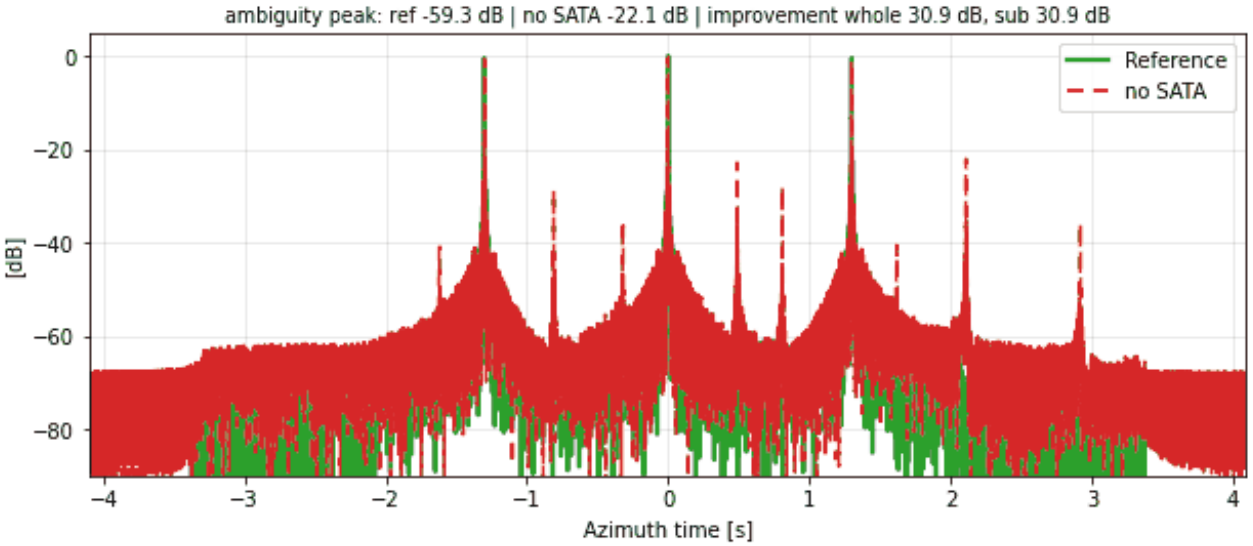



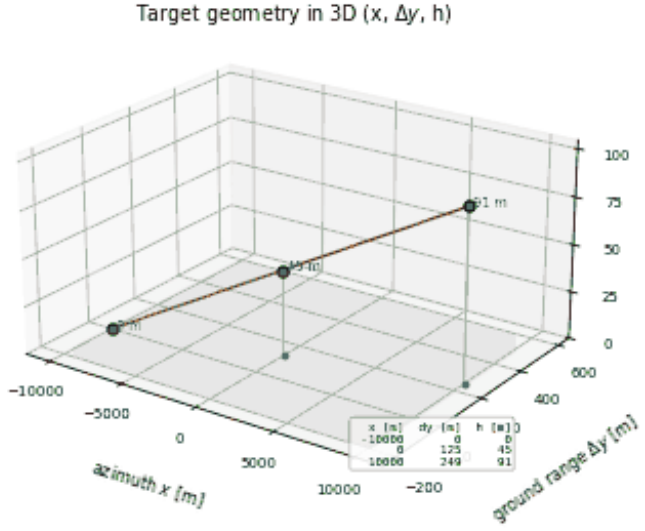
RA-LL-015 | SATA 1D | along-track ramp: N = 3, $\alpha = 1°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

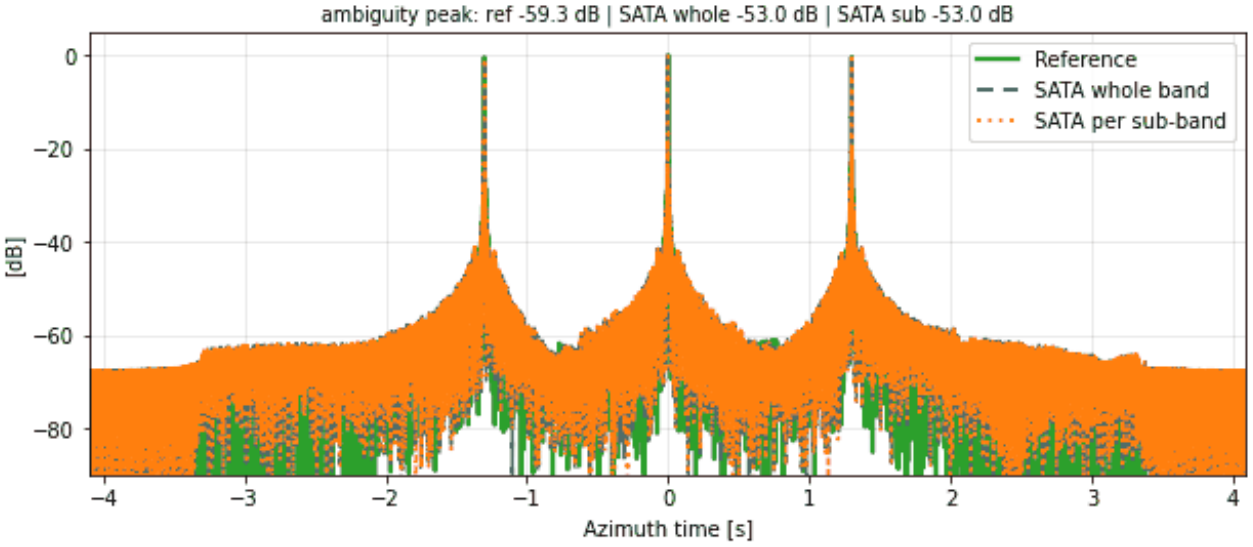






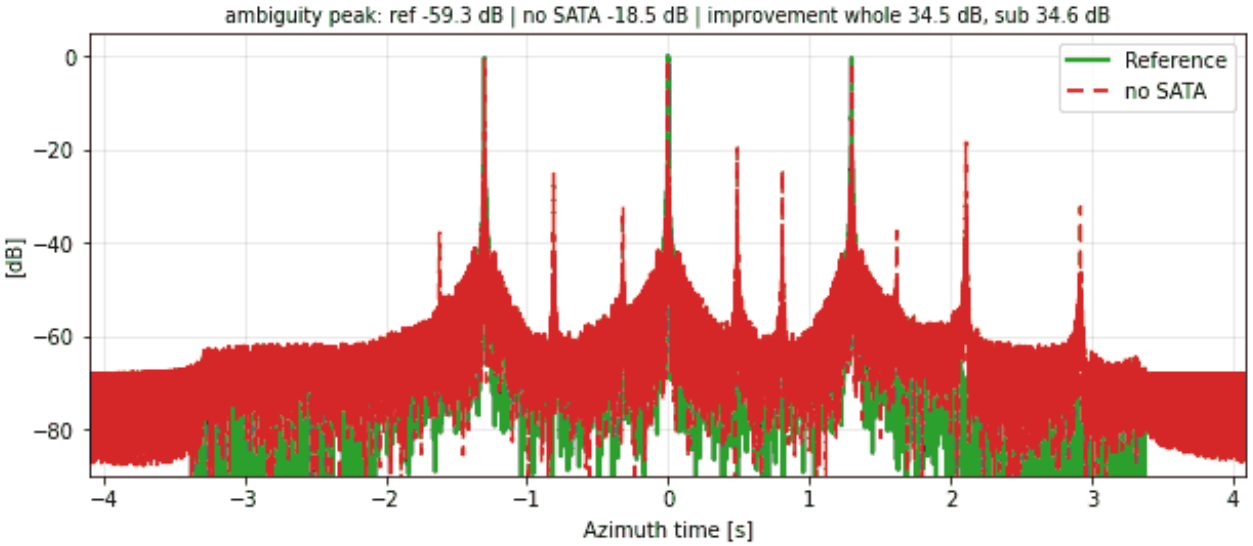



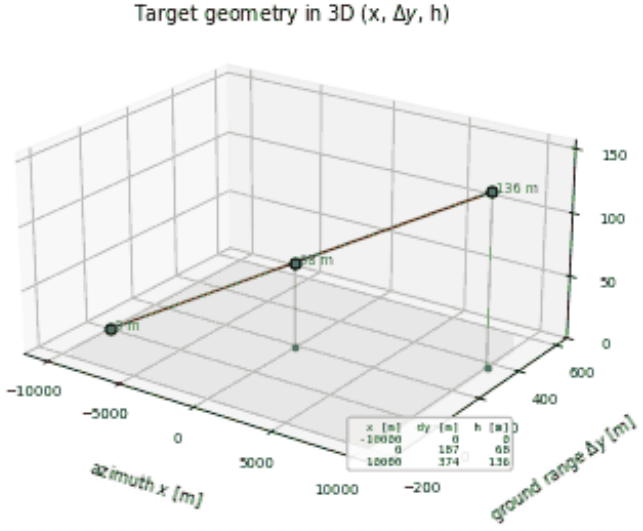



RA-LL-016 | SATA 1D | along-track ramp: N = 3, $\alpha = 1.5^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

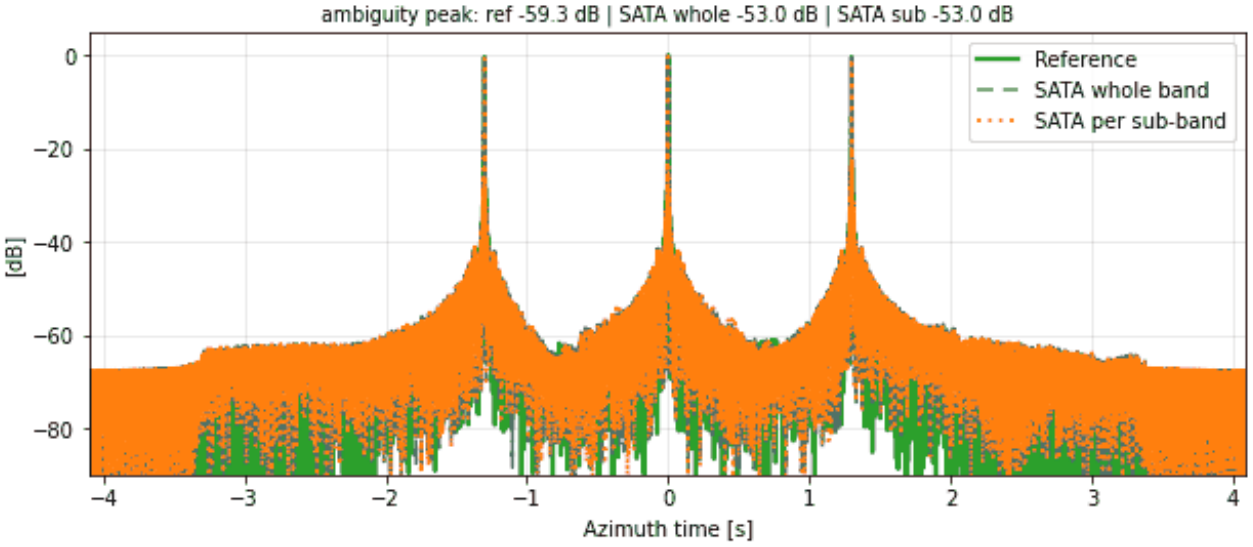


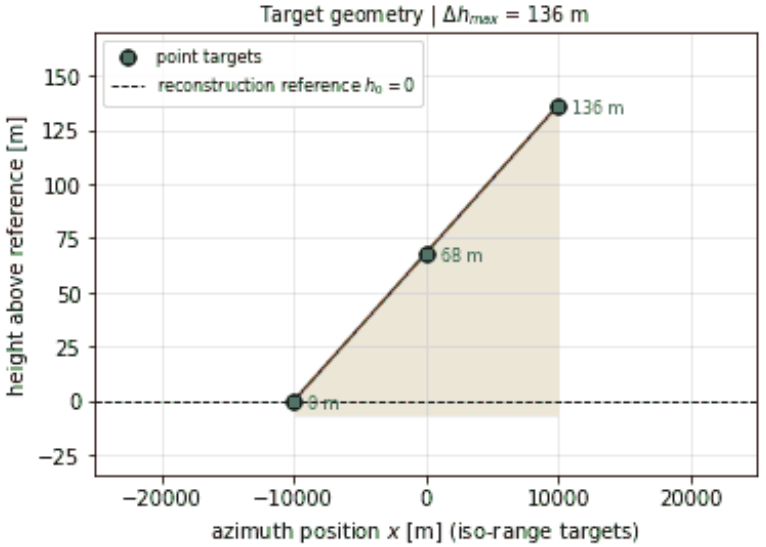



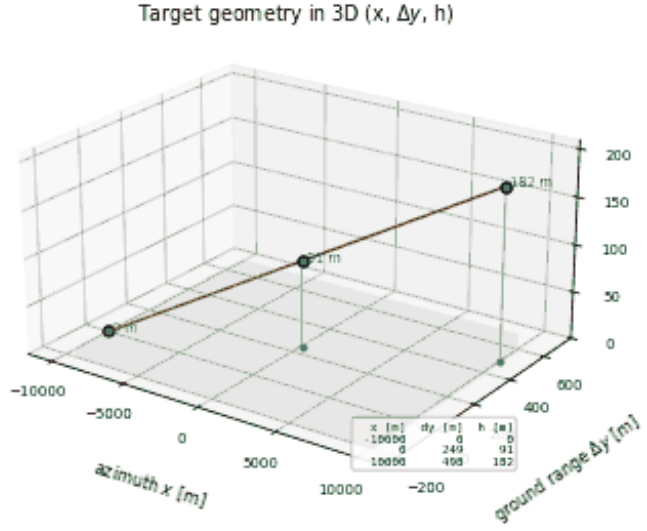
RA-LL-017 | SATA 1D | along-track ramp: N = 3, $\alpha = 2°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a = 1235$ Hz | $\Delta b_{at} = 7.69$ m (DPCA)



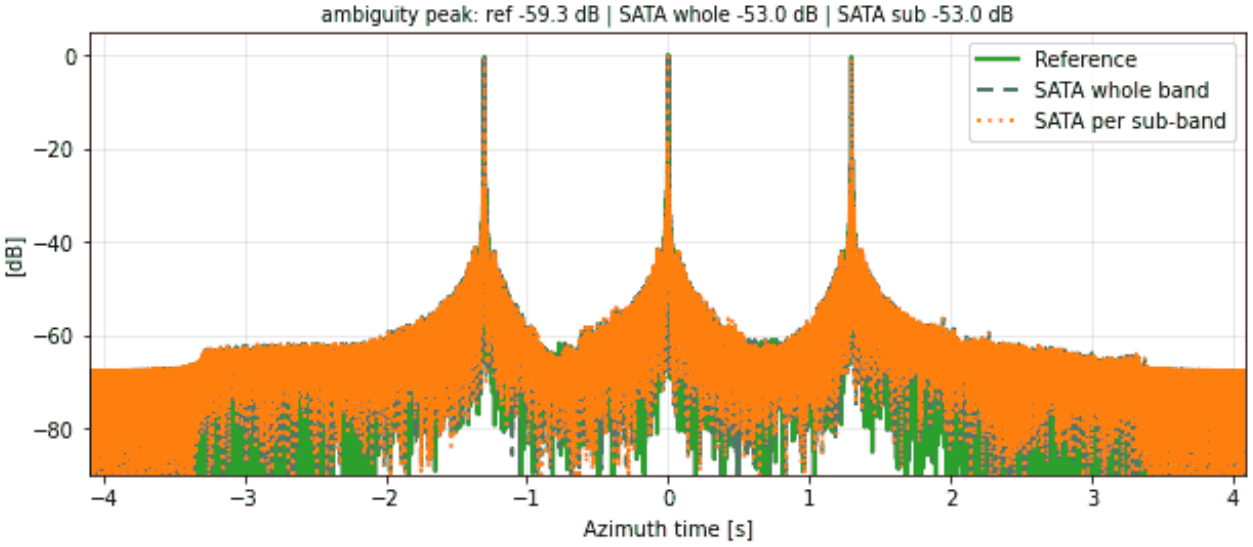



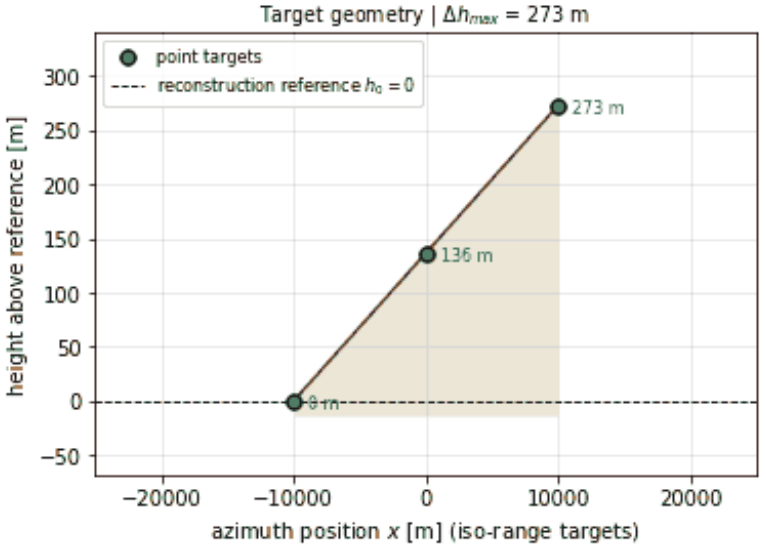


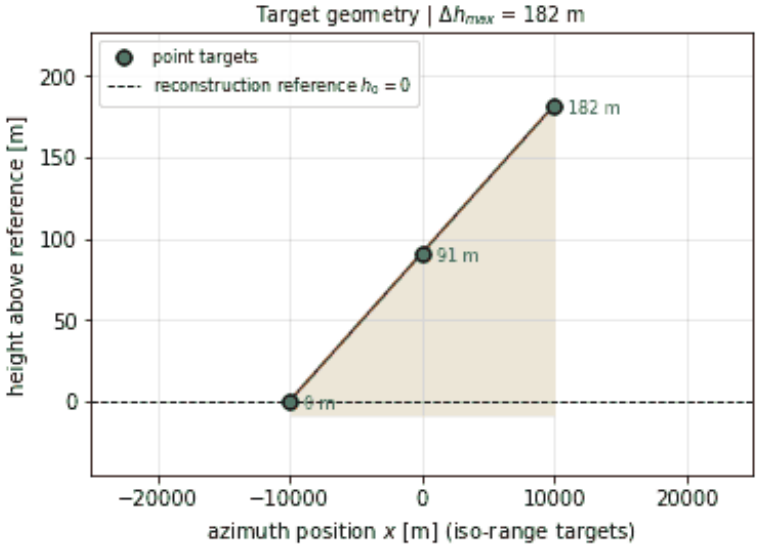




RA-LL-018 | SATA 1D | along-track ramp: N = 3, $\alpha = 3°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a = 1235$ Hz | $\Delta b_{at} = 7.69$ m (DPCA)

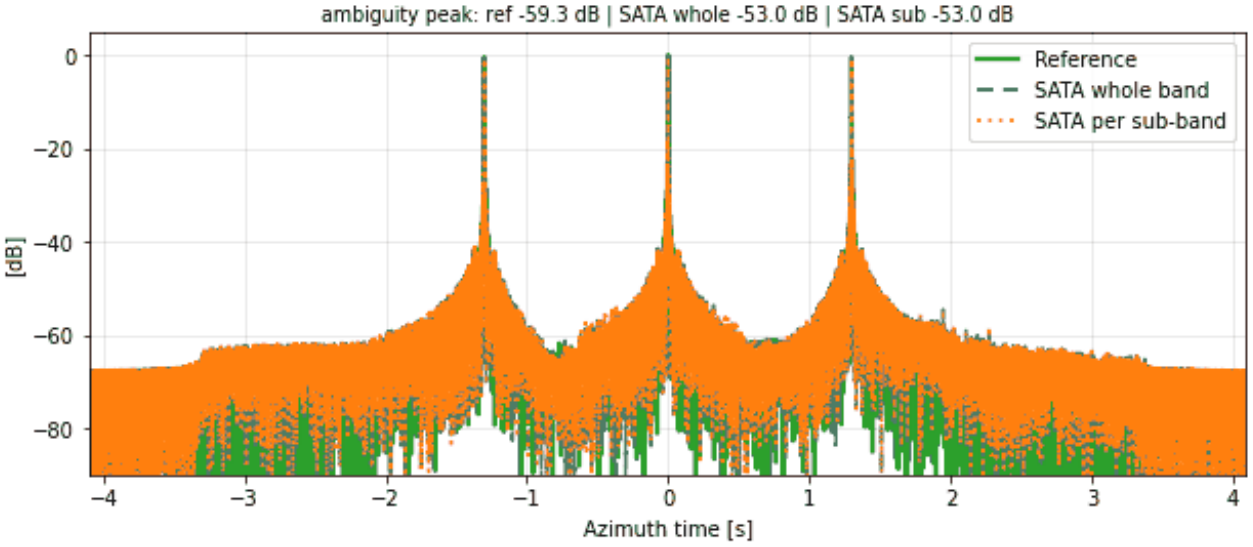







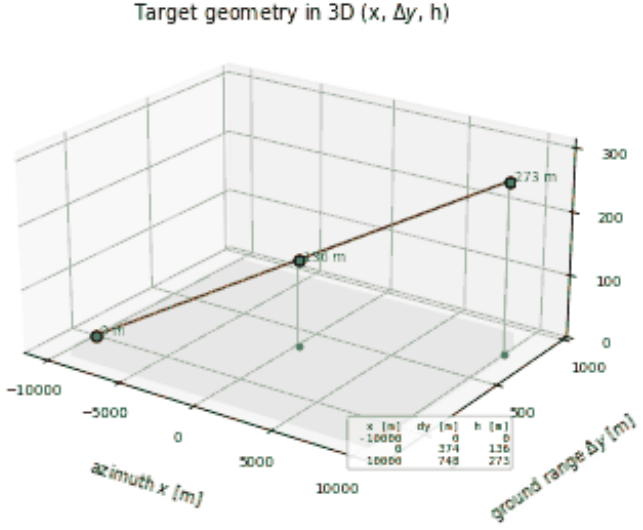



RA-LL-019 | SATA 1D | along-track ramp: N = 3, $\alpha = 4°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

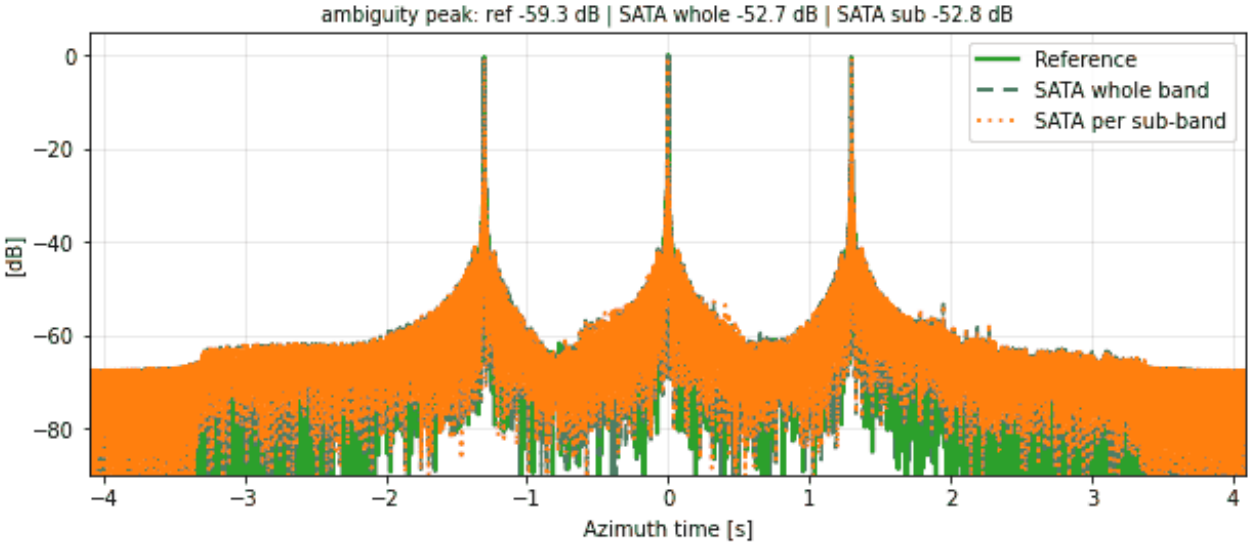


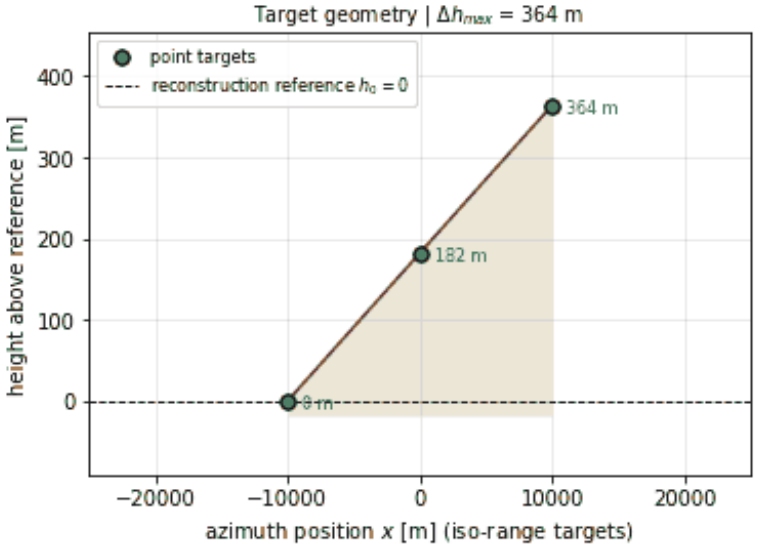


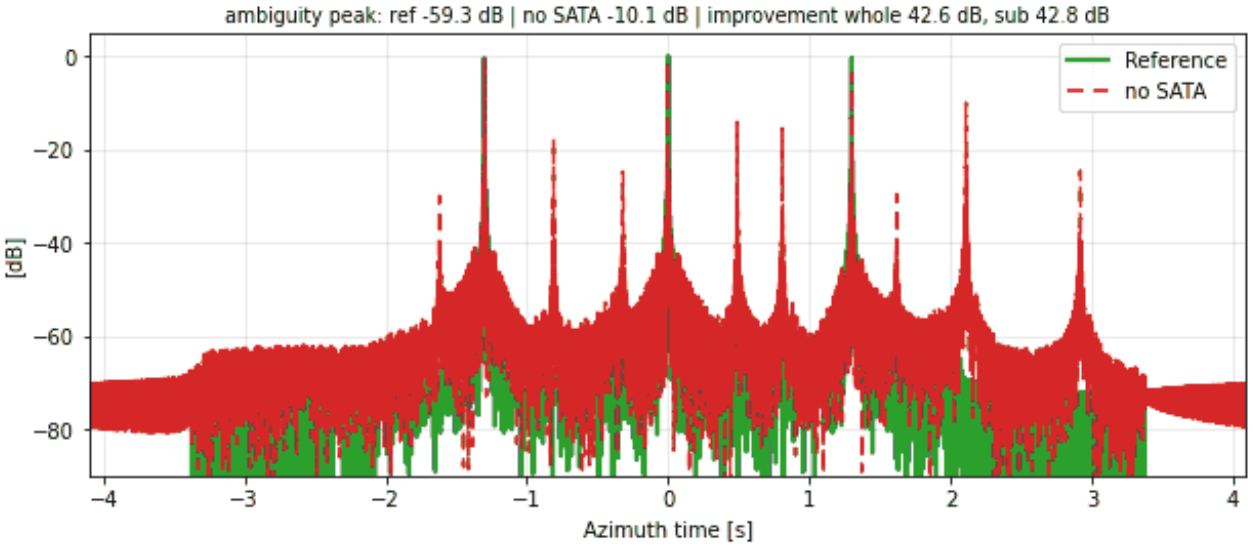
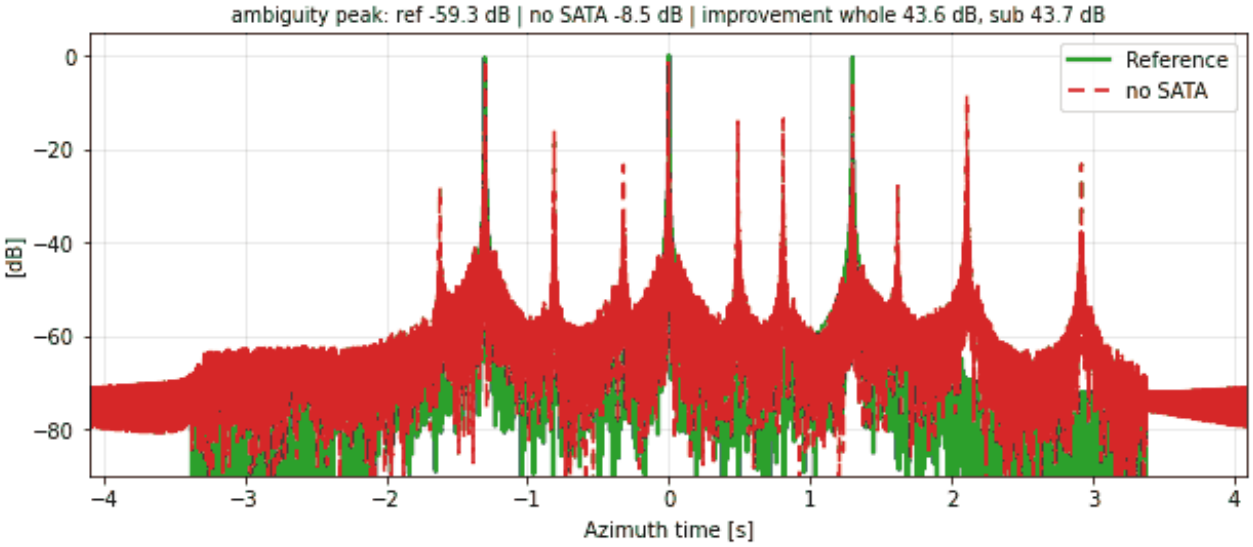


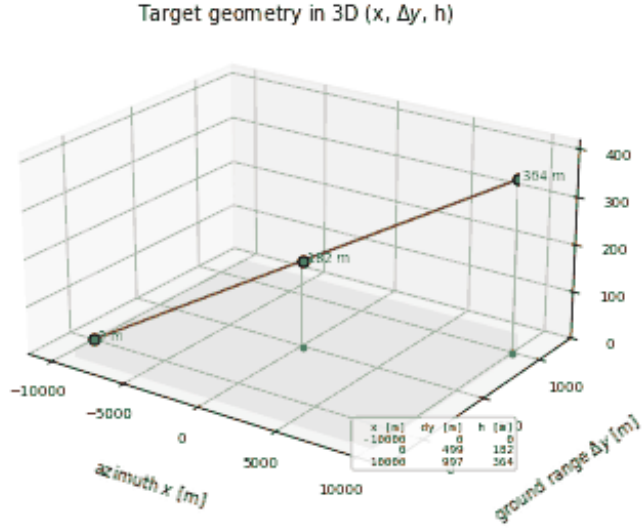
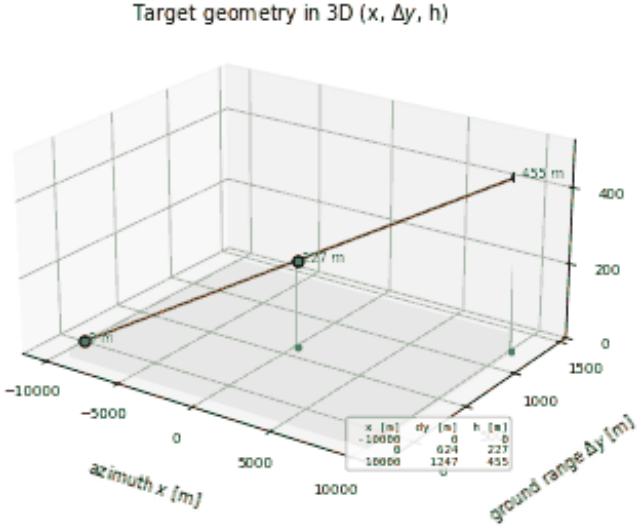



RA-LL-020 | SATA 1D | along-track ramp: N = 3, $\alpha = 5°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

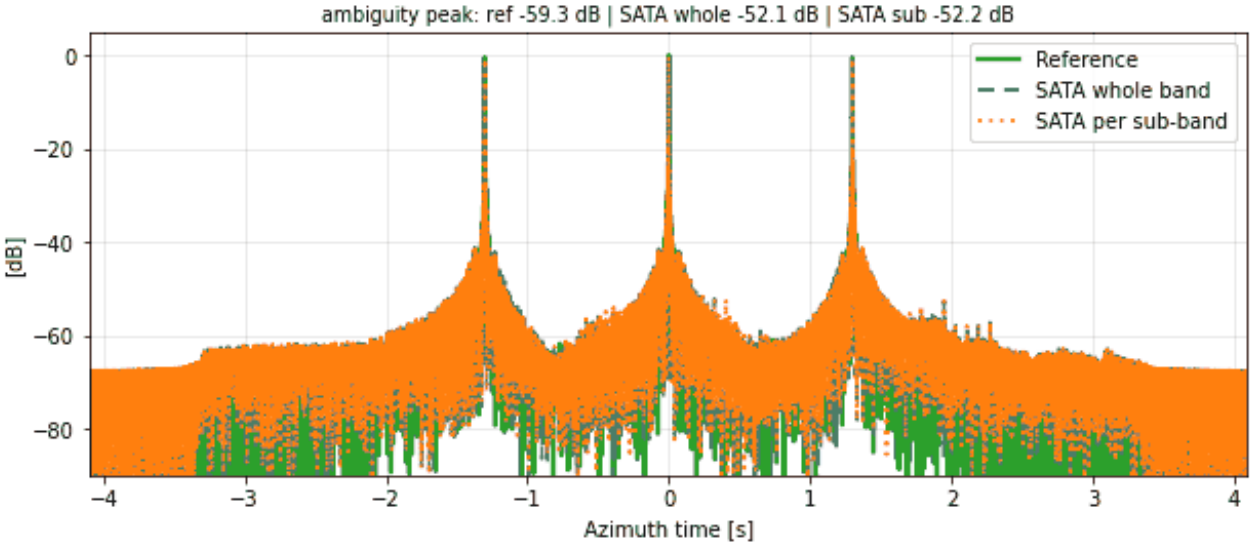


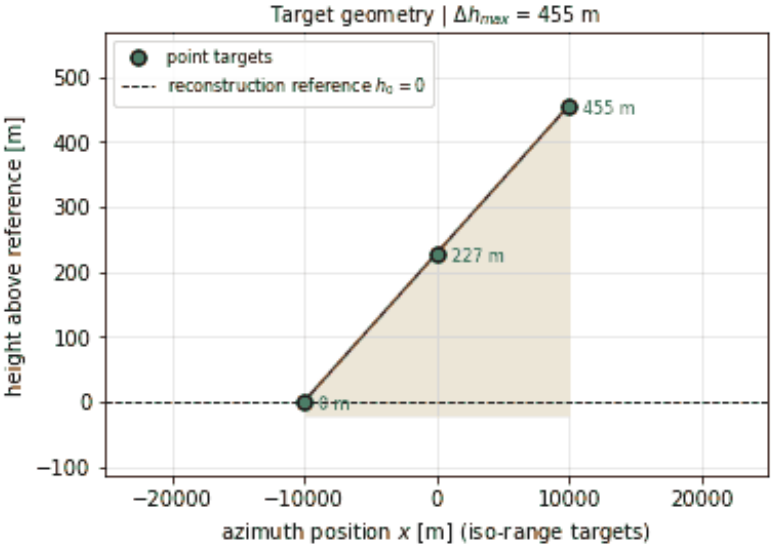



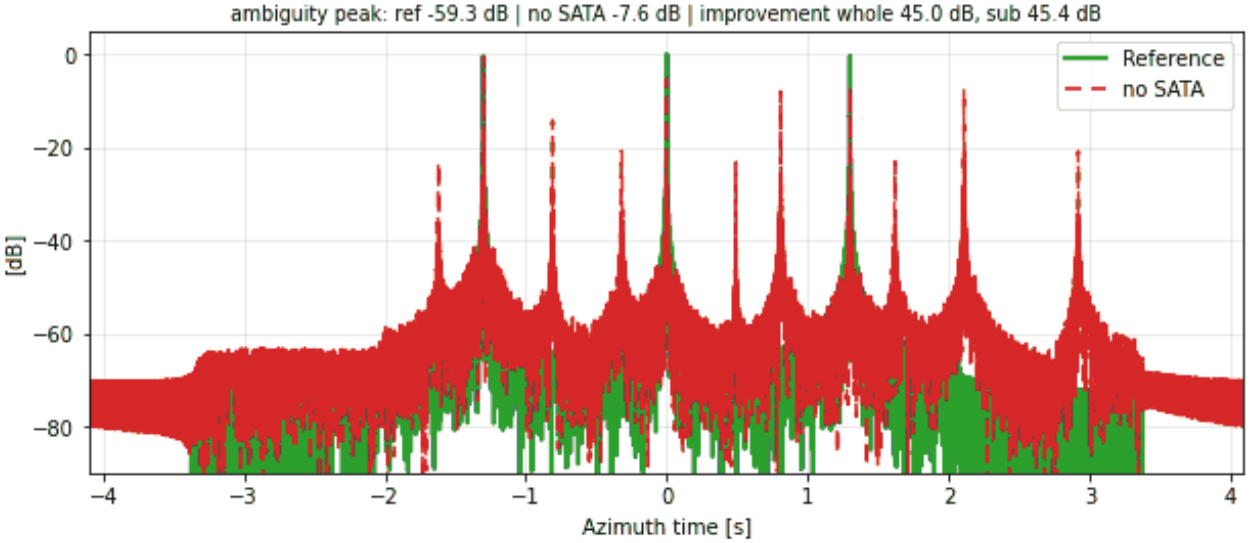



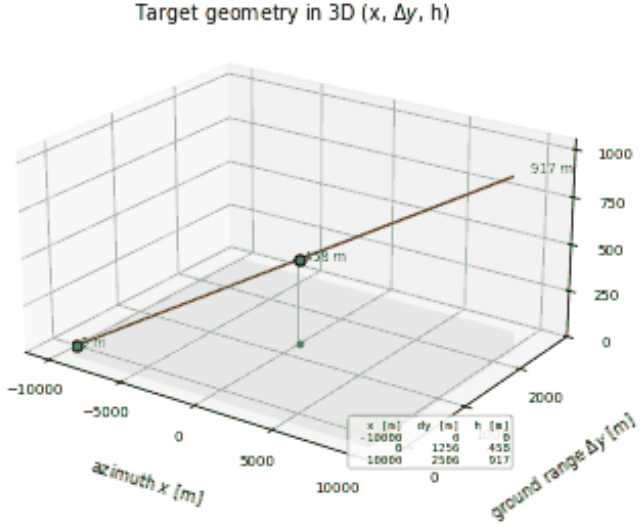



RA-LL-021 | SATA 1D | along-track ramp: N = 3, $\alpha = 10°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a = 1235$ Hz | $\Delta b_{at} = 7.69$ m (DPCA)

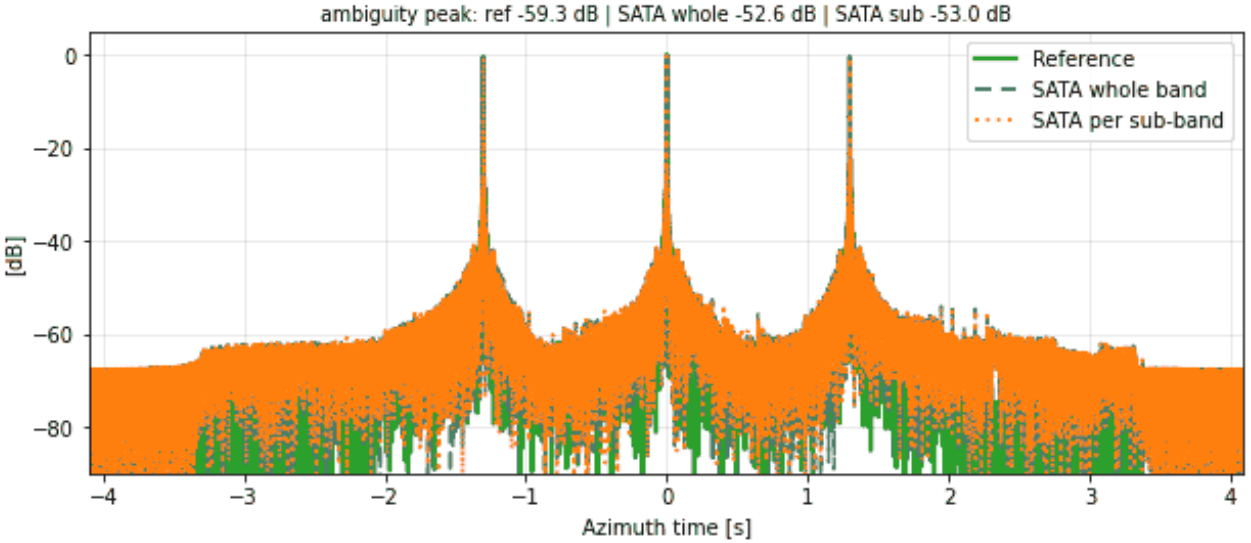


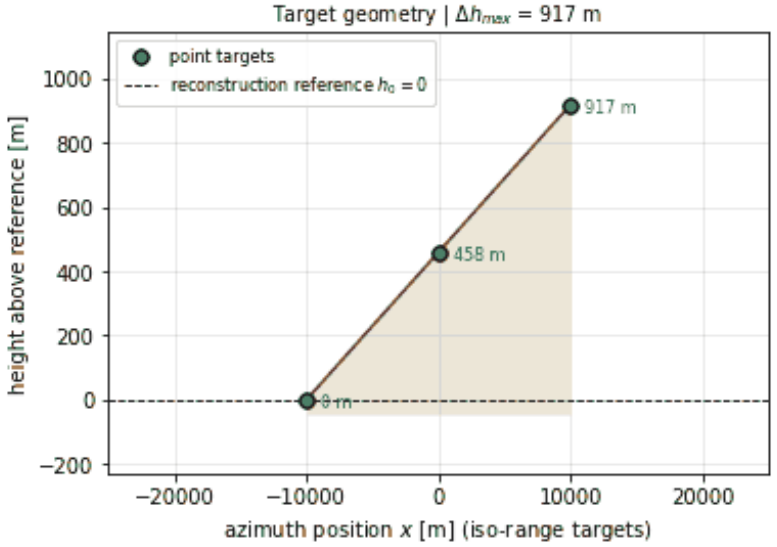



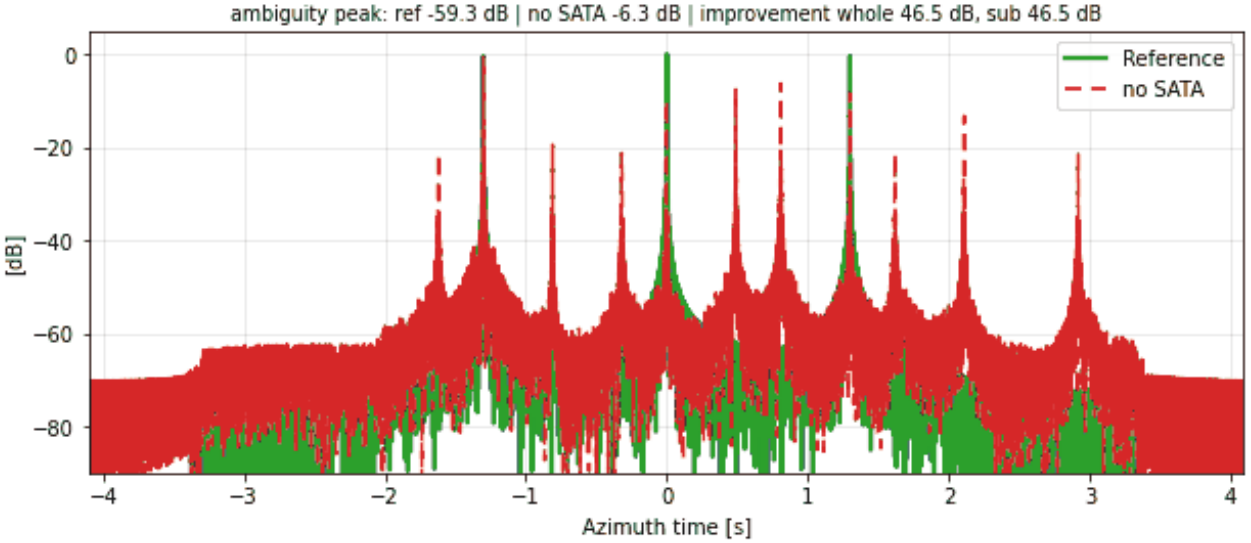



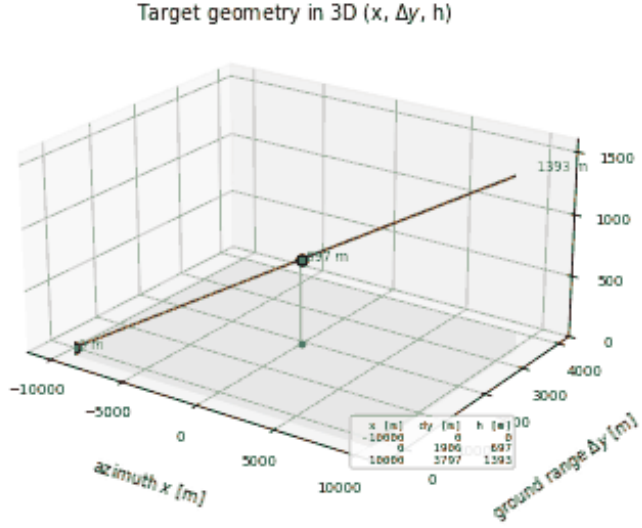



RA-LL-022 | SATA 1D | along-track ramp: N = 3, $\alpha = 15°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

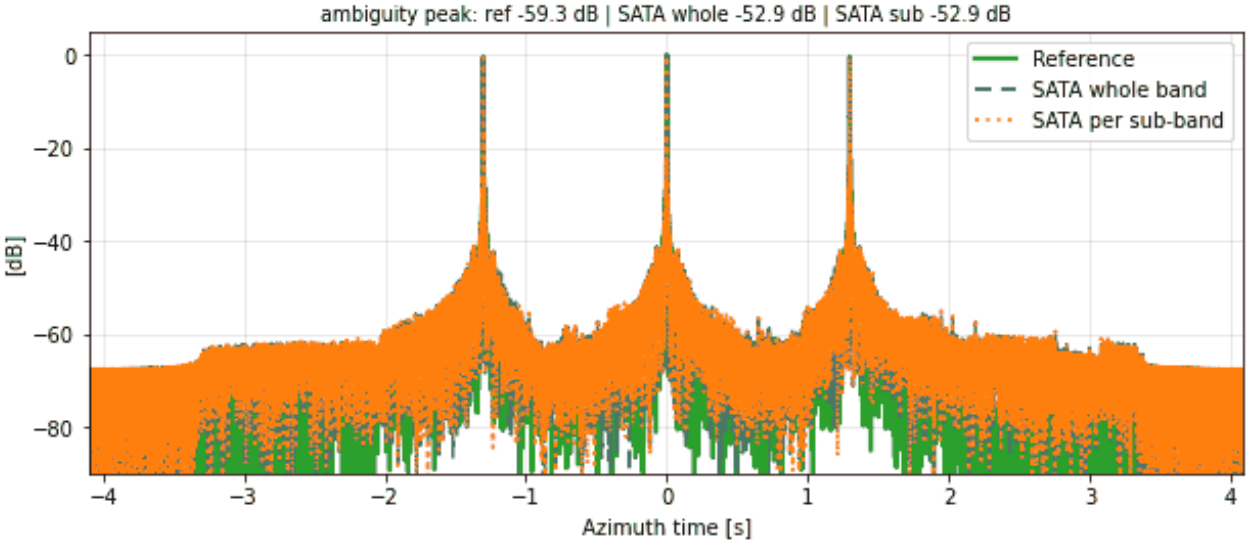

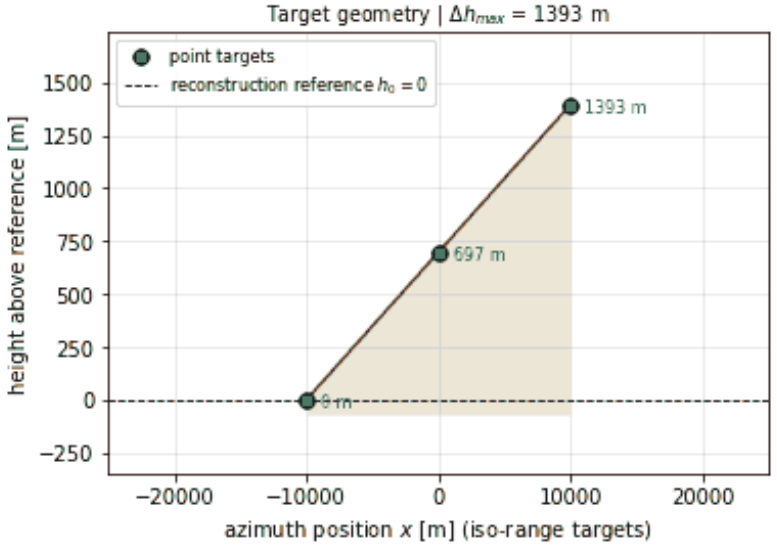



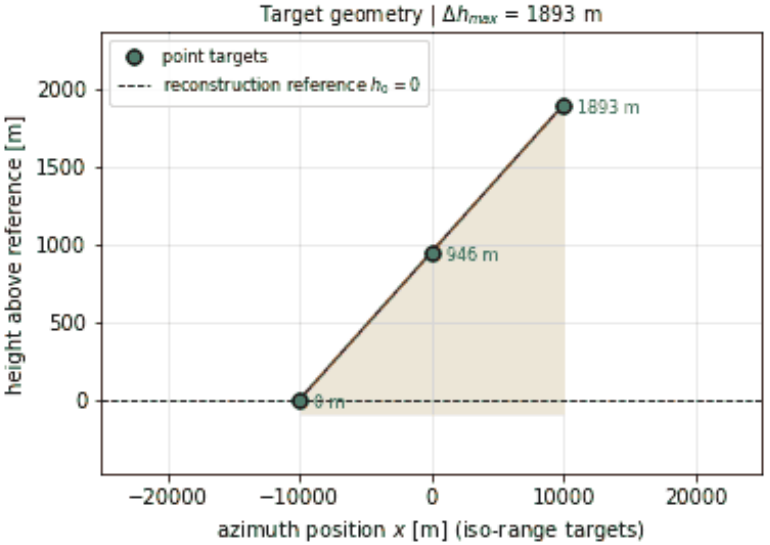



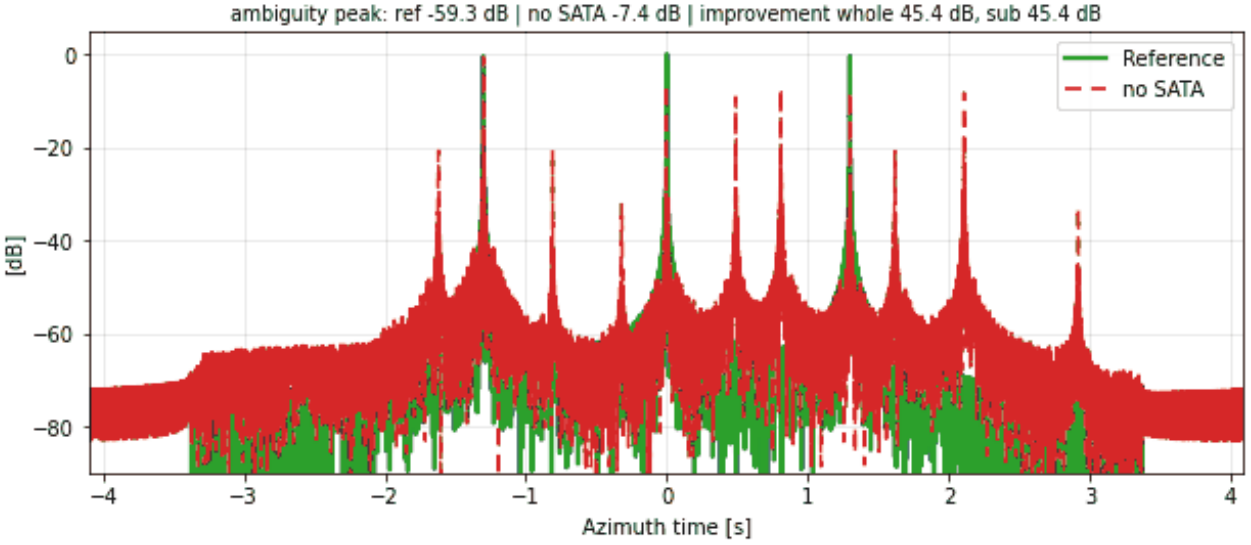



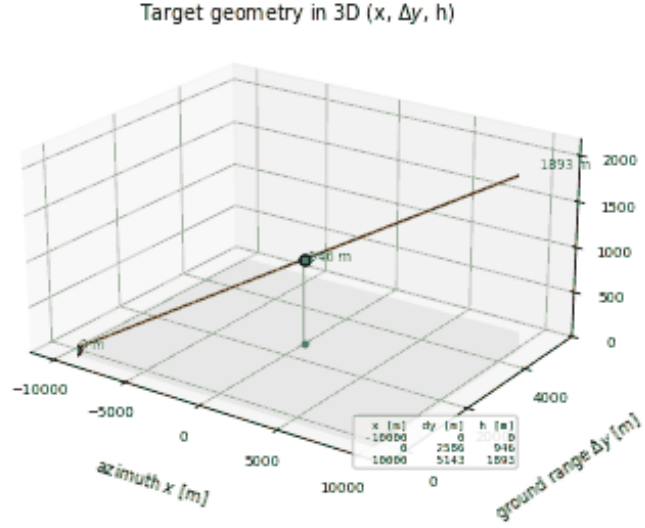

474

RA-LL-023 | SATA 1D | along-track ramp: N = 3, $\alpha = 20°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a = 1235$ Hz | $\Delta b_{at} = 7.69$ m (DPCA)

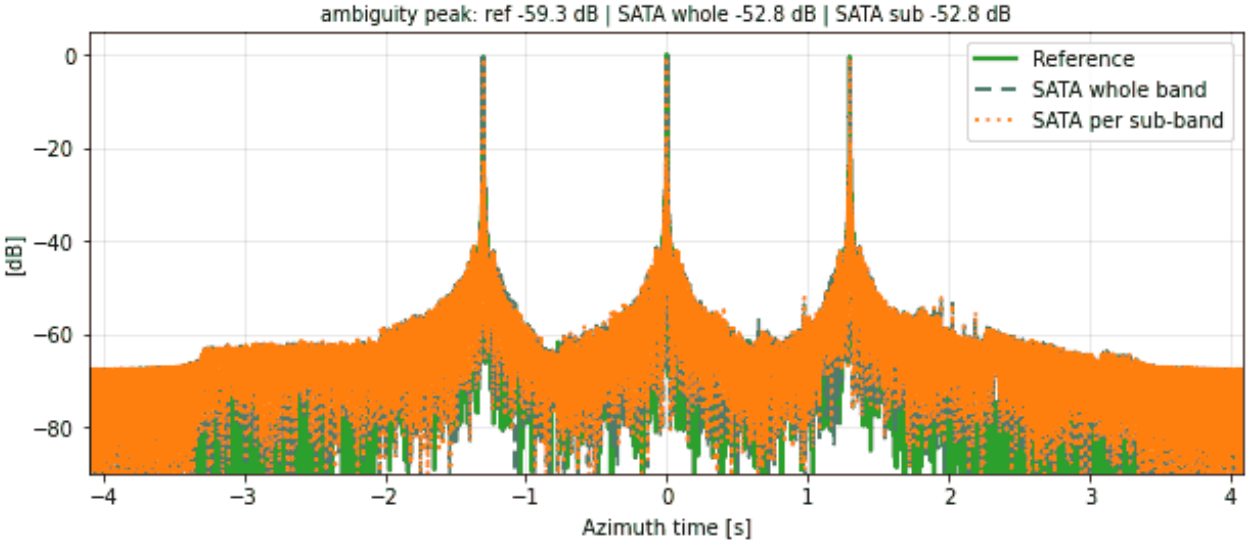





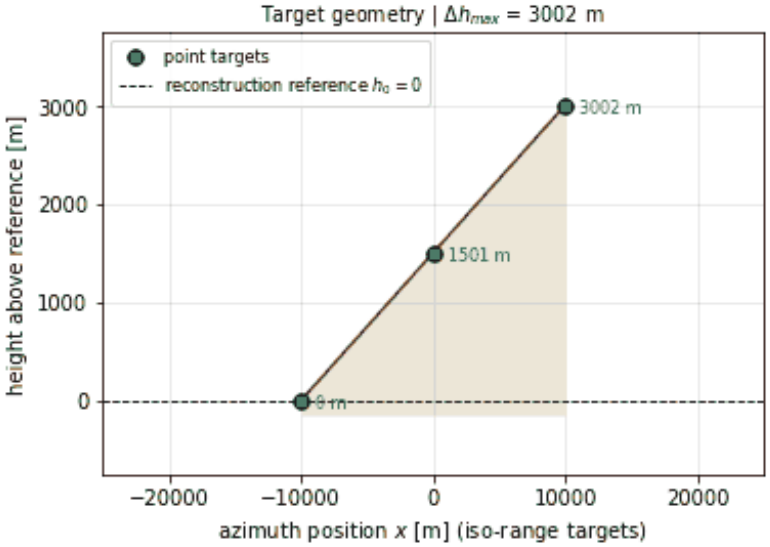



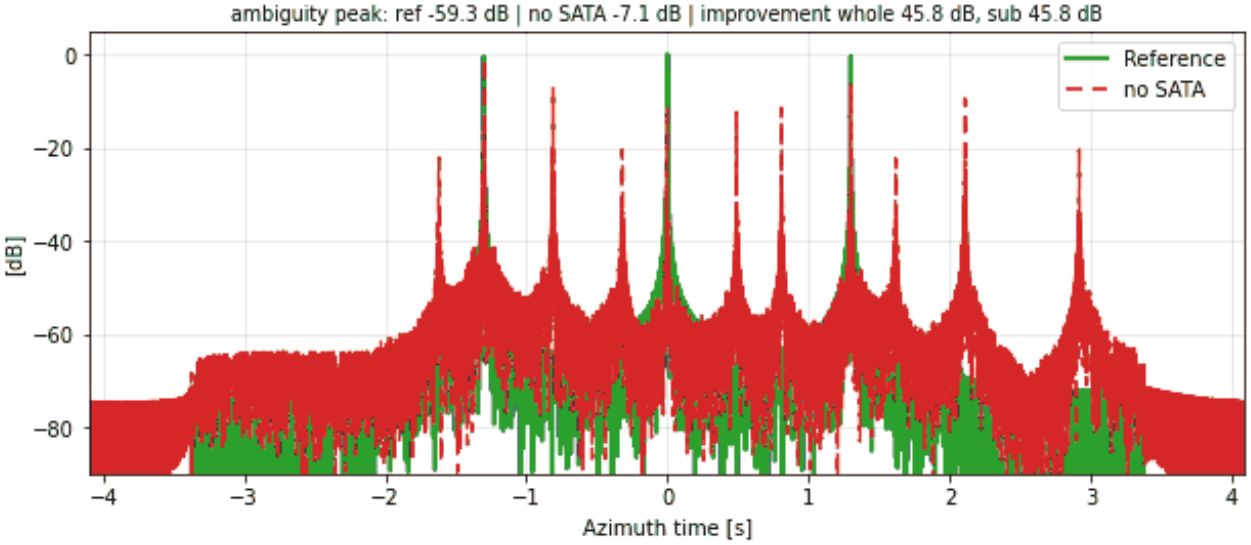

475


RA-LL-024 | SATA 1D | along-track ramp: N = 3, $\alpha = 30°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

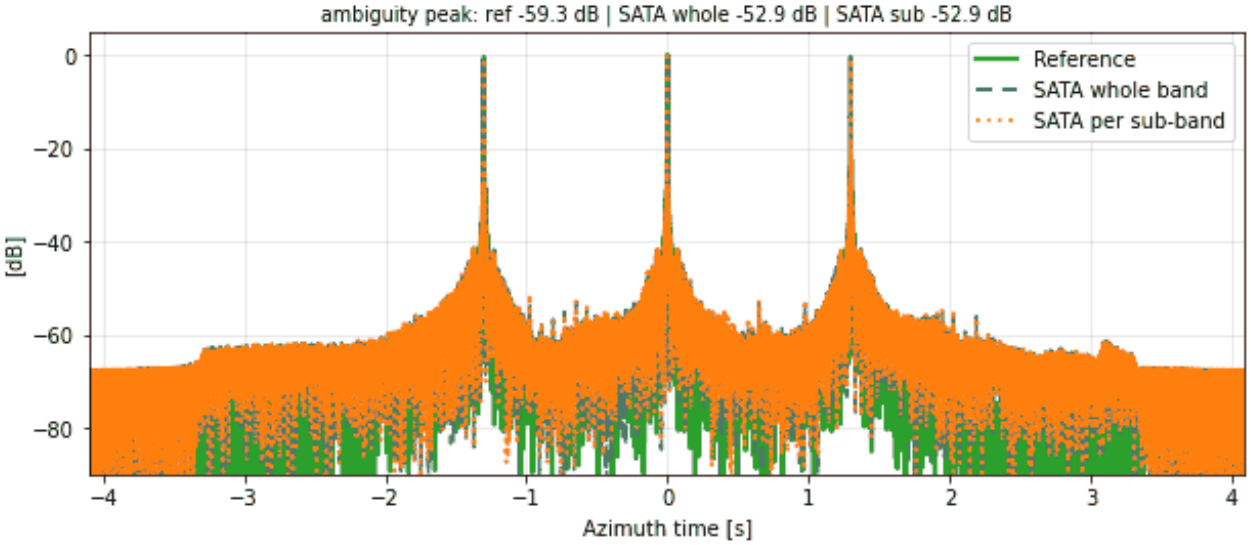






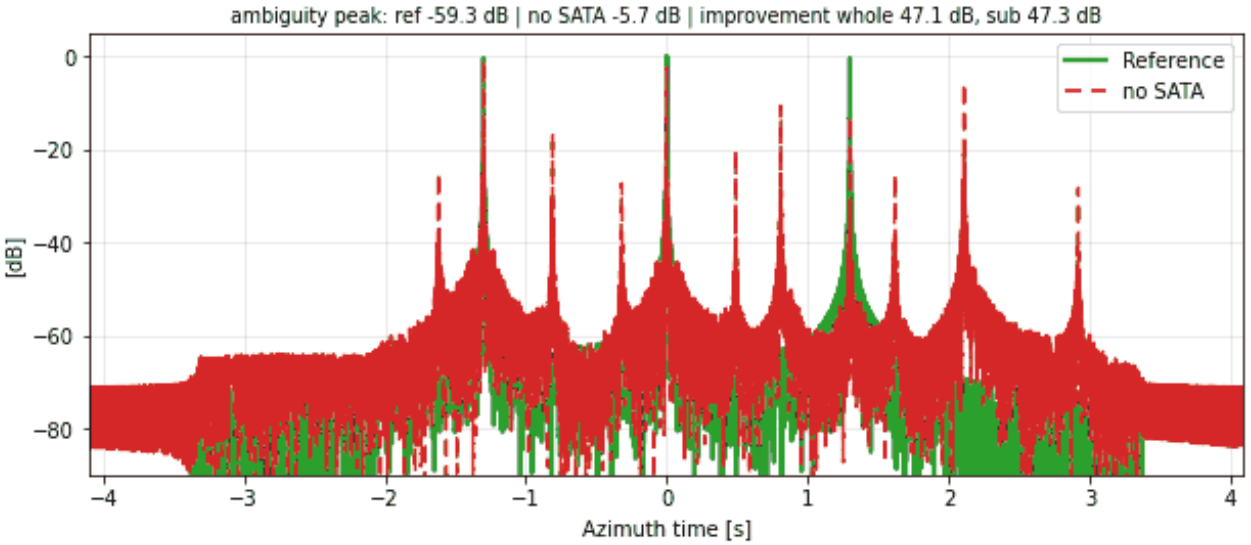


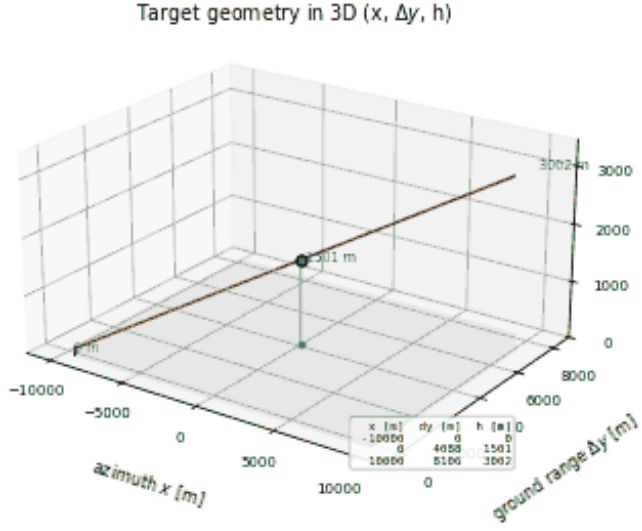
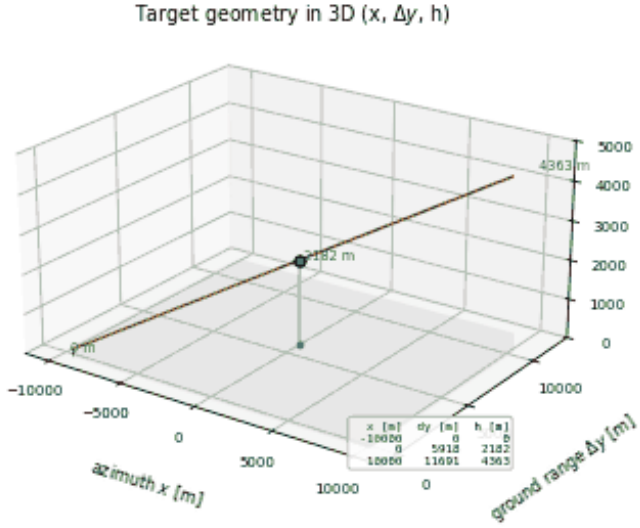



RA-LL-025 | SATA 1D | along-track ramp: N = 3, $\alpha = 40°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

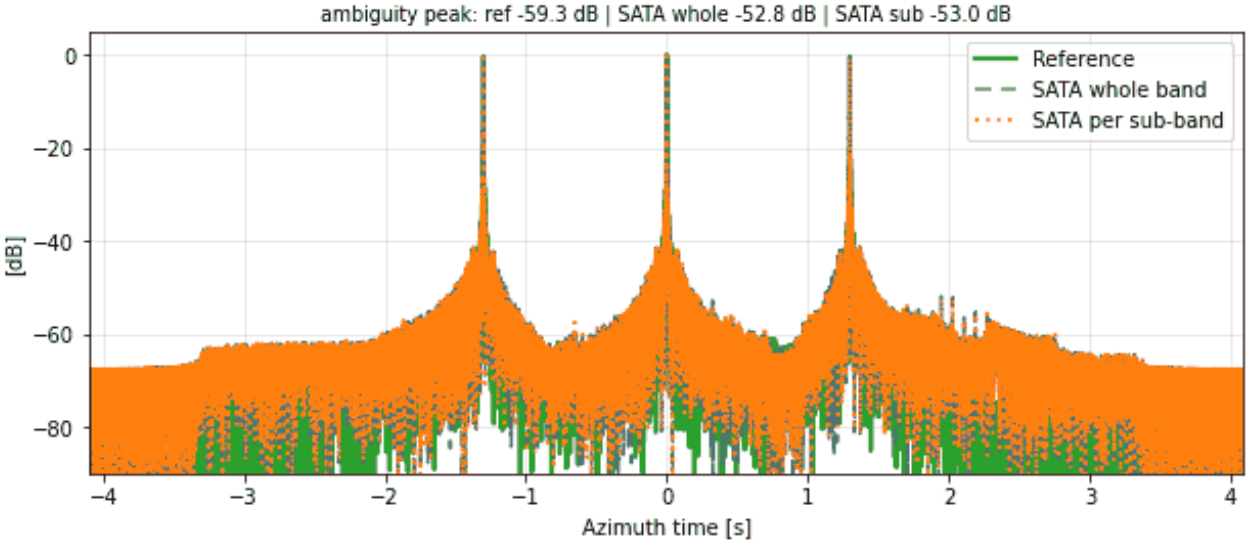


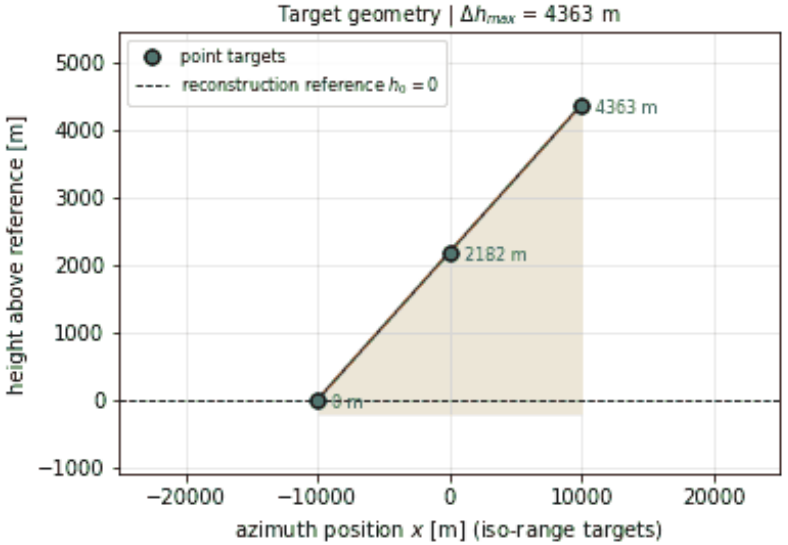



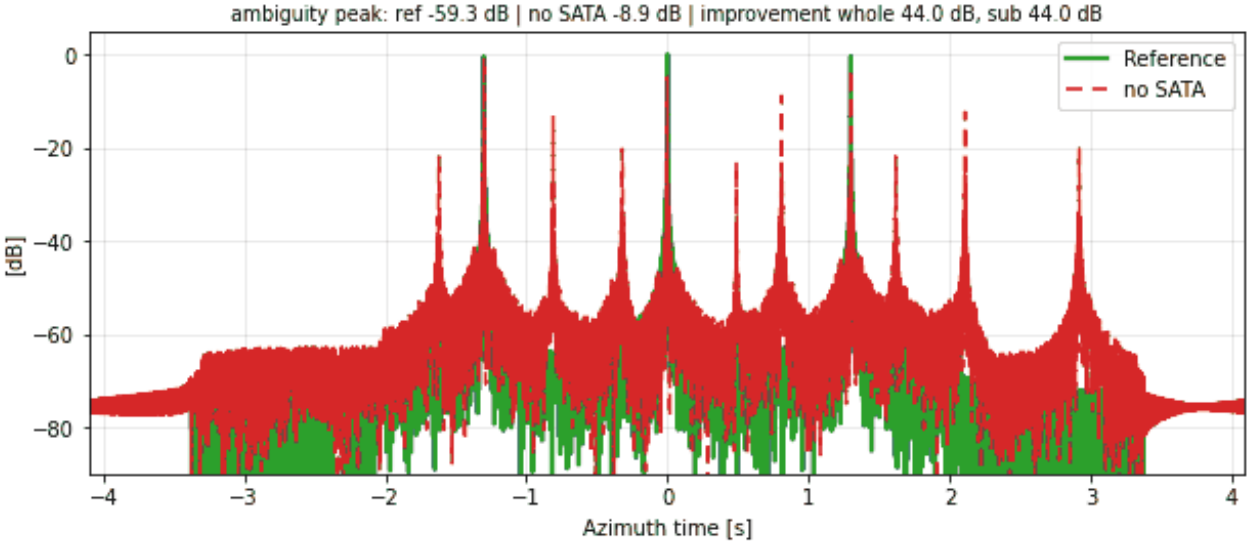



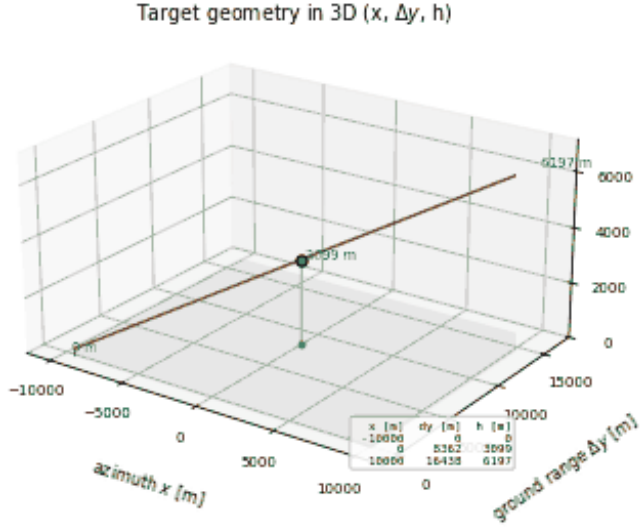



RA-LL-026 | SATA 1D | along-track ramp: N = 3, $\alpha = 50°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

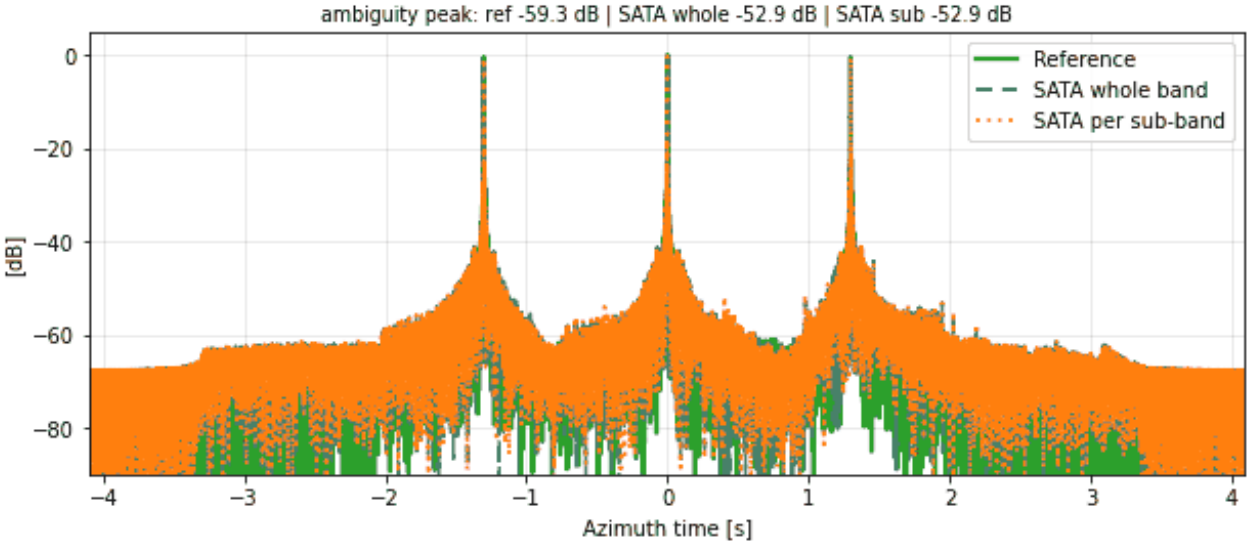


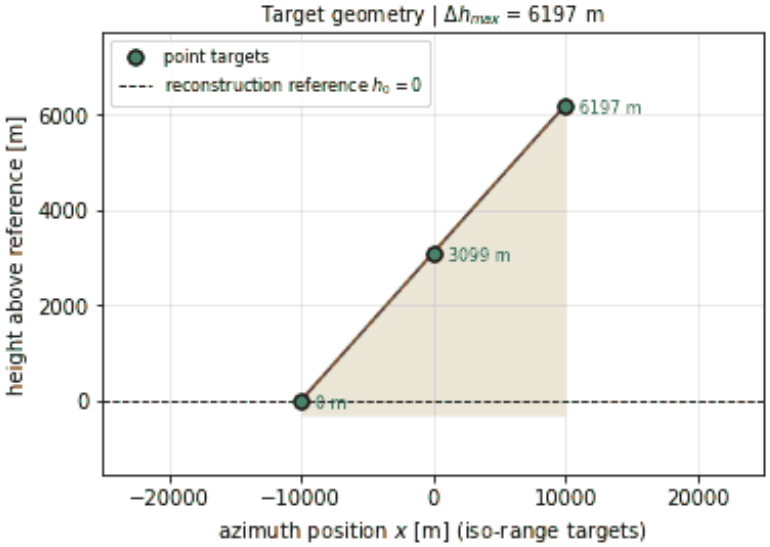



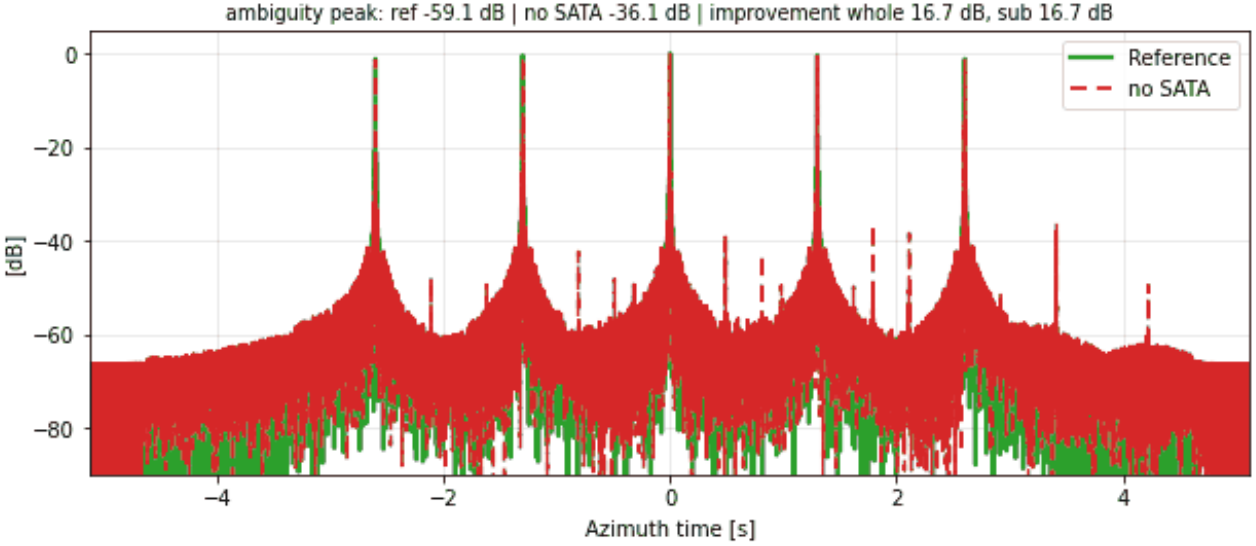



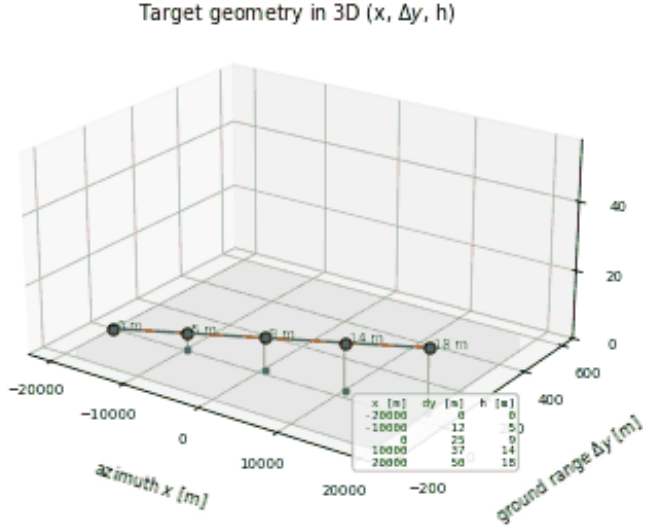



RA-LL-027 | SATA 1D | along-track ramp: N = 5, $\alpha = 0.1°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

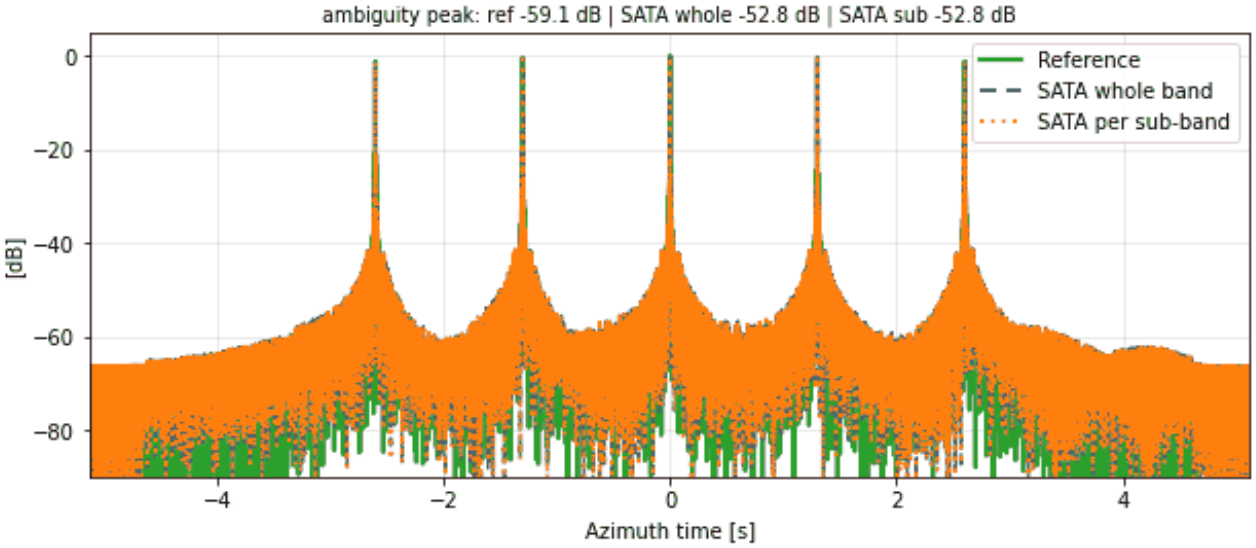

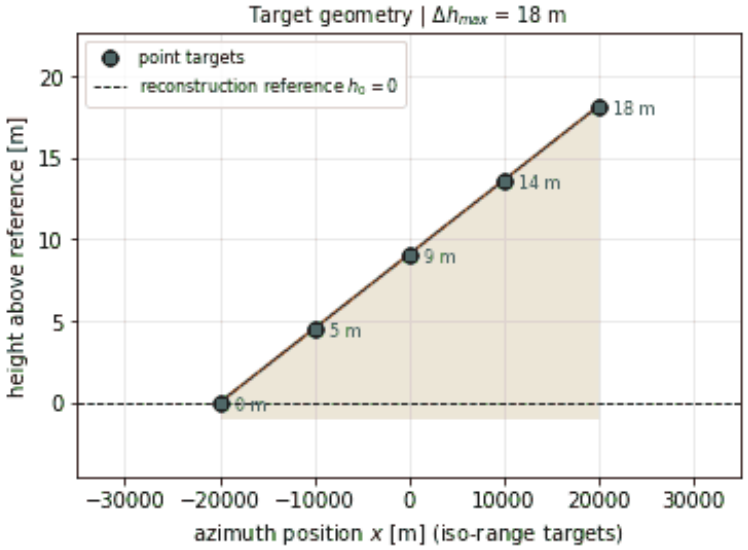



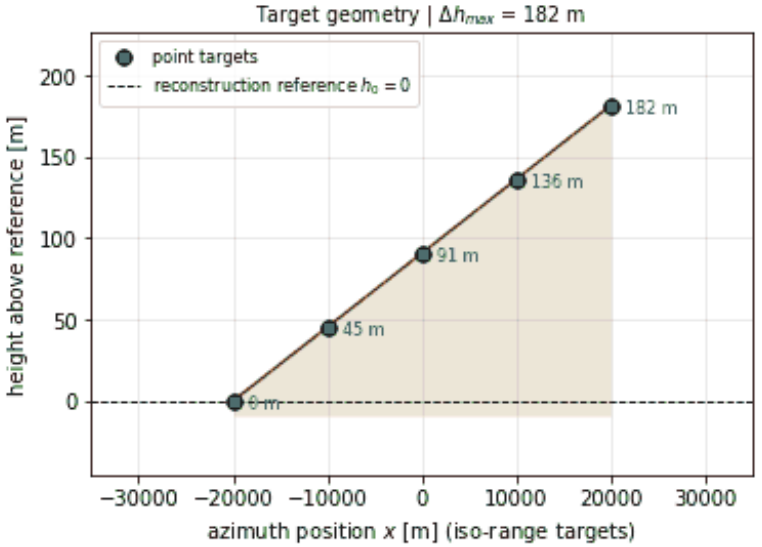



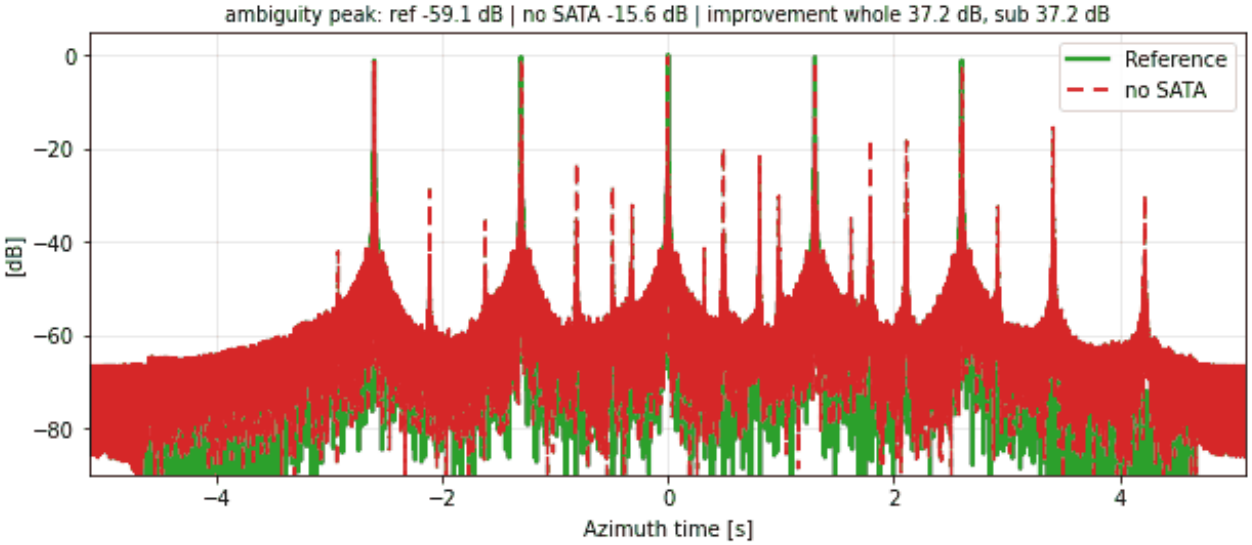



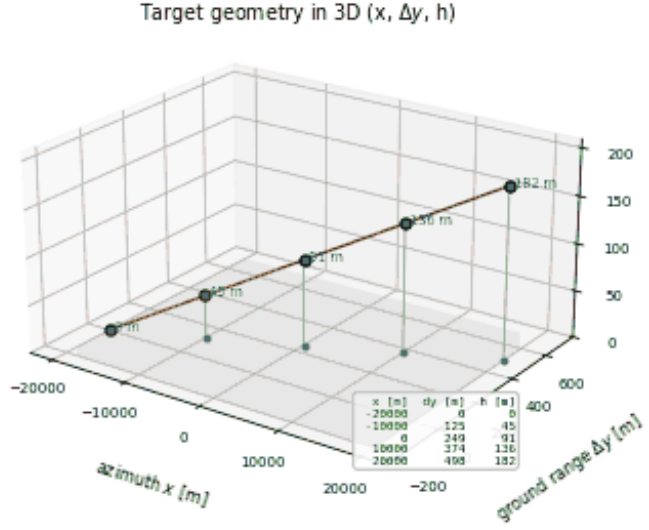
RA-LL-028 | SATA 1D | along-track ramp: N = 5, $\alpha = 1^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

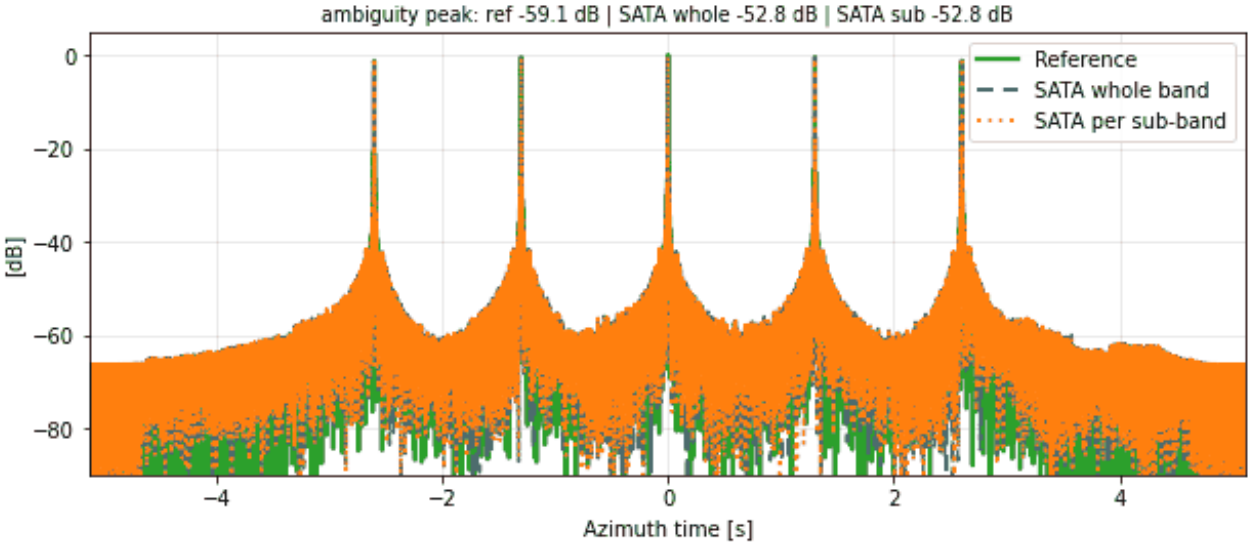






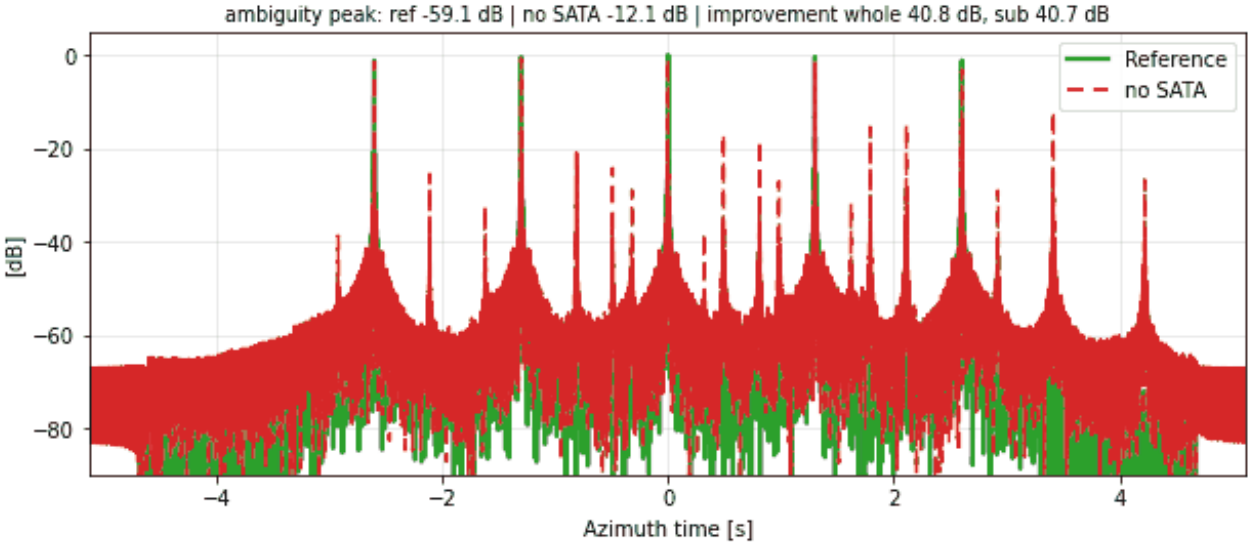



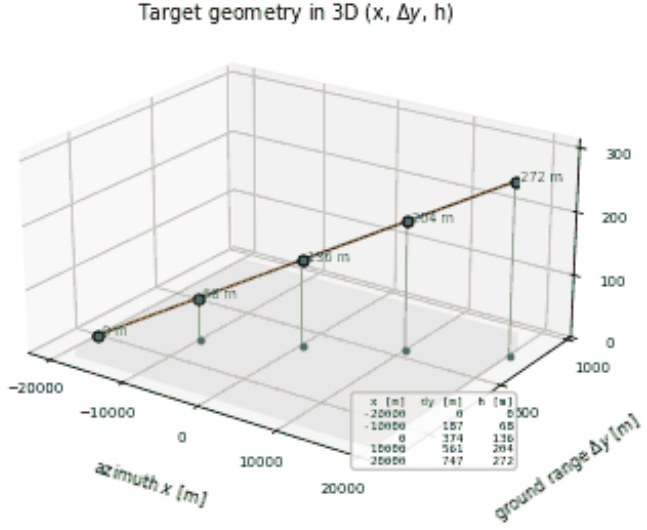



RA-LL-029 | SATA 1D | along-track ramp: N = 5, $\alpha$ = 1.5° (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

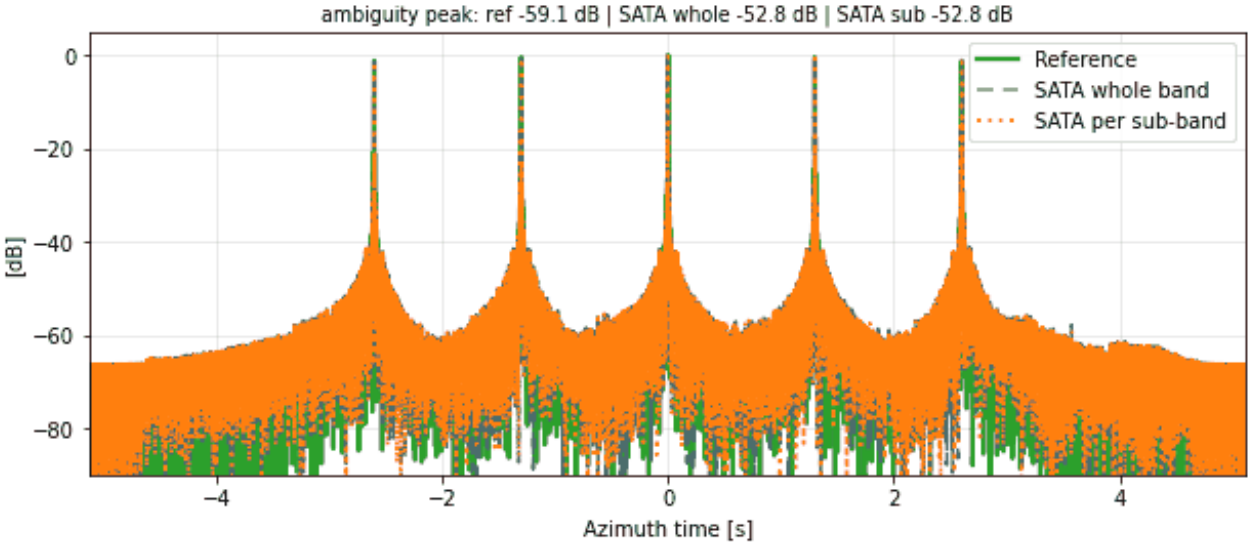

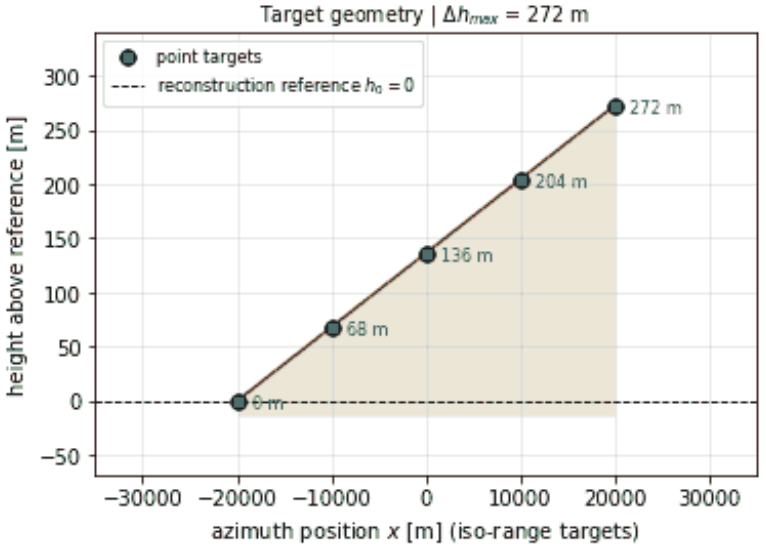



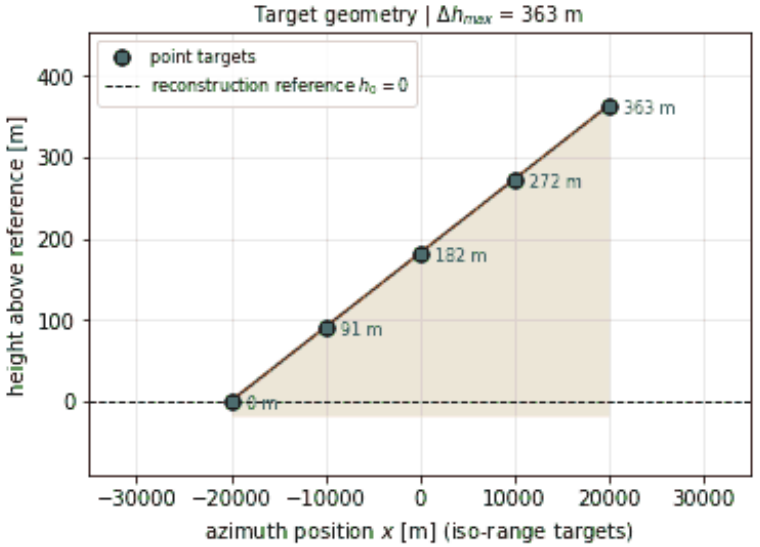



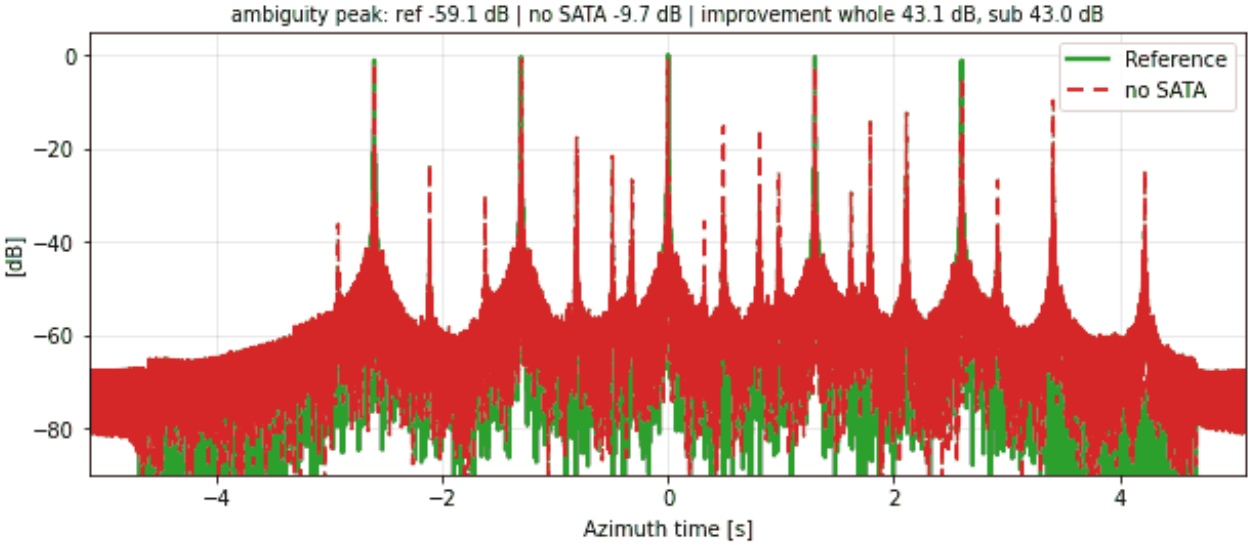

481


RA-LL-030 | SATA 1D | along-track ramp: N = 5, $\alpha = 2°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

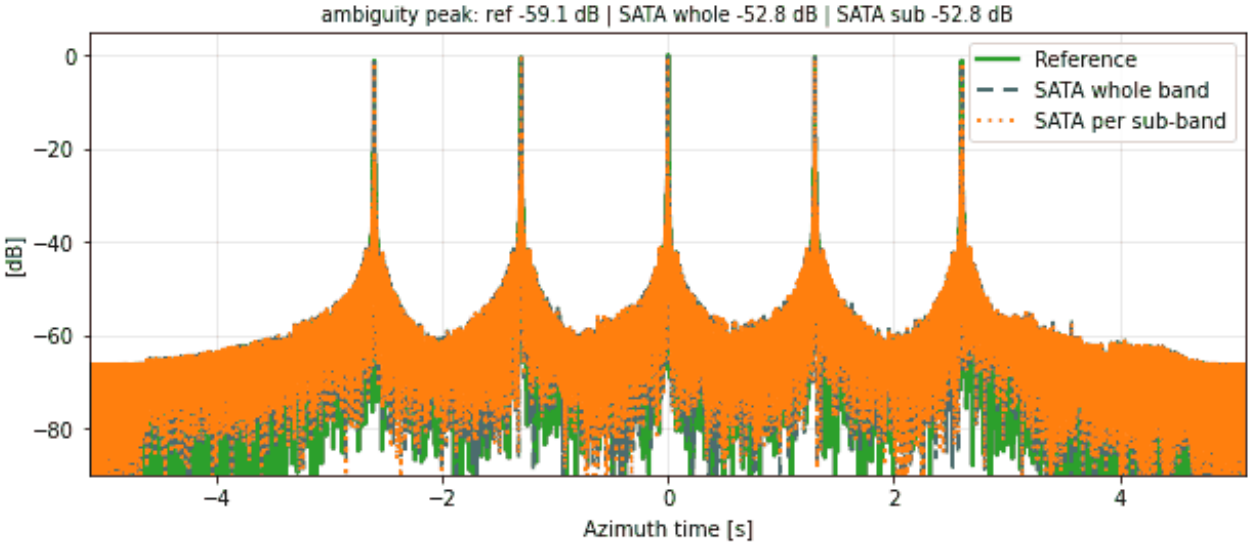






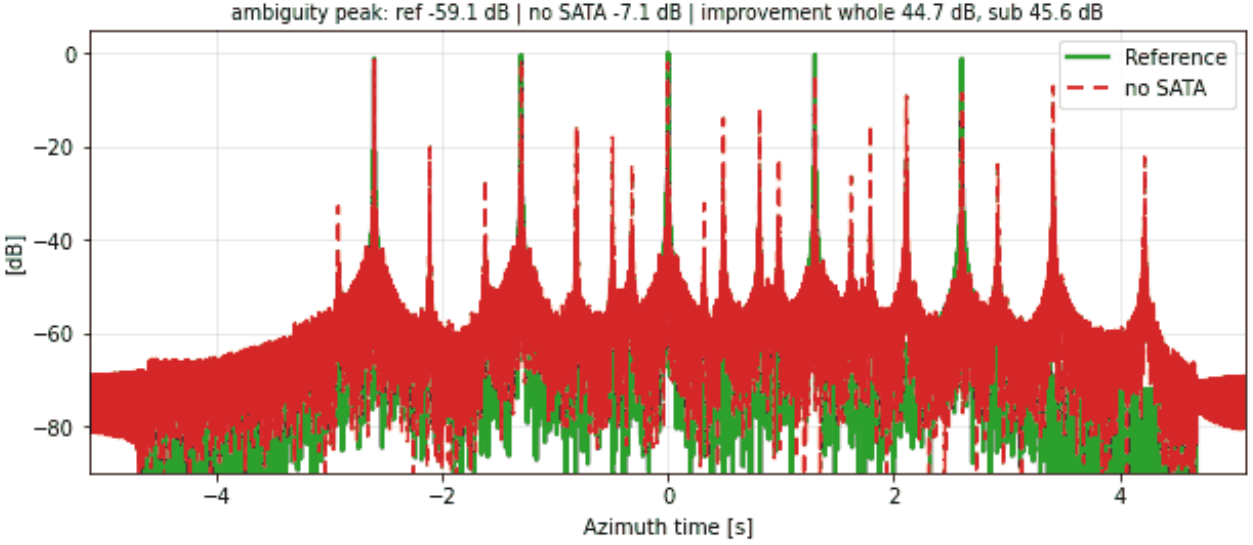


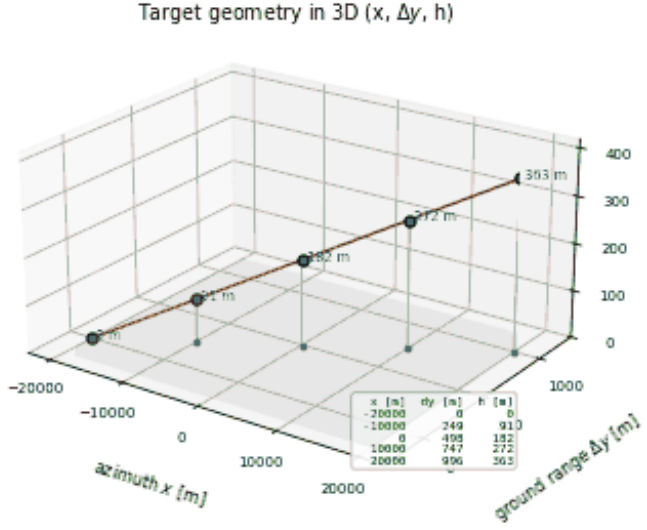
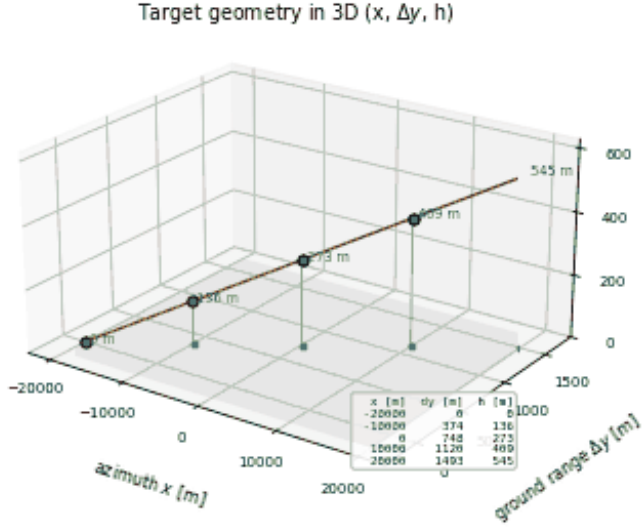



RA-LL-031 | SATA 1D | along-track ramp: N = 5, $\alpha = 3^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

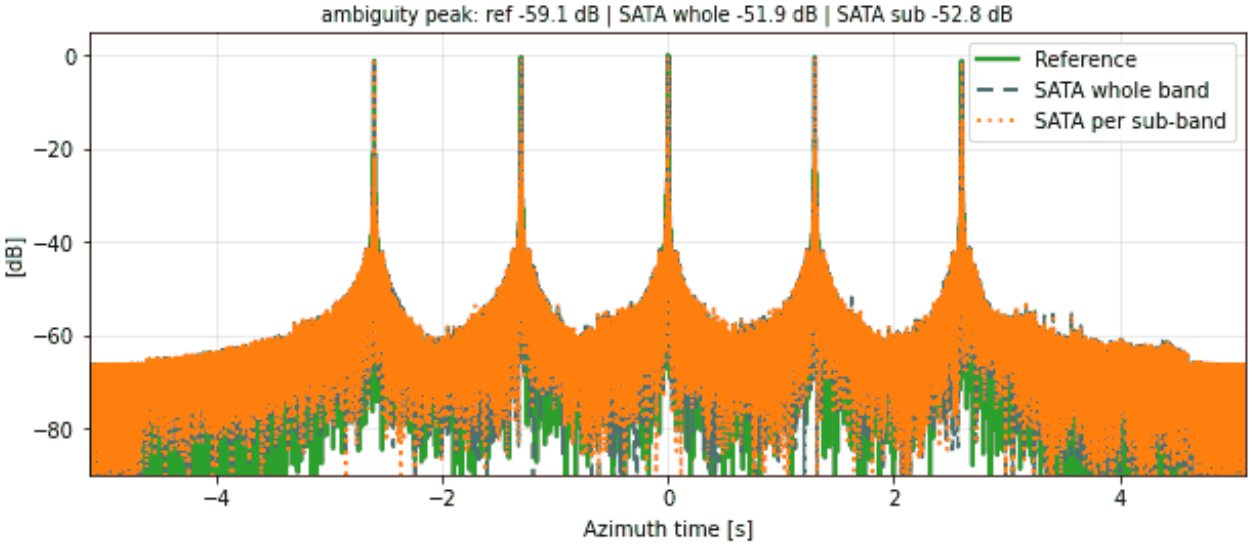


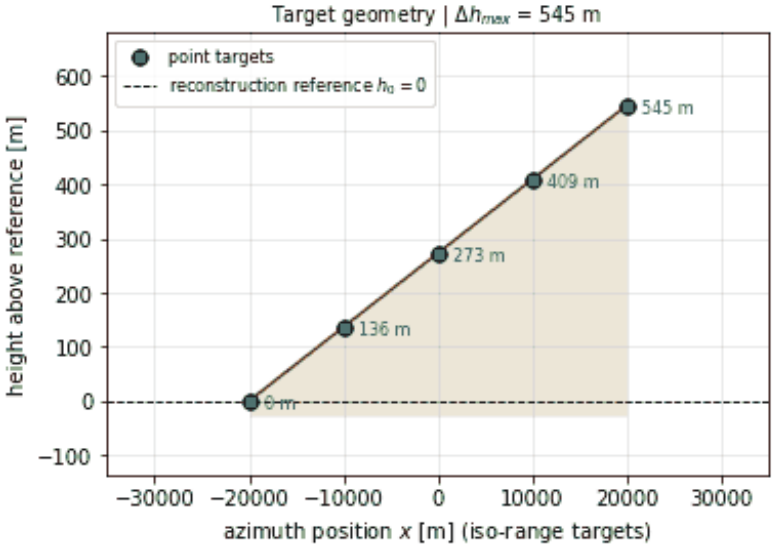



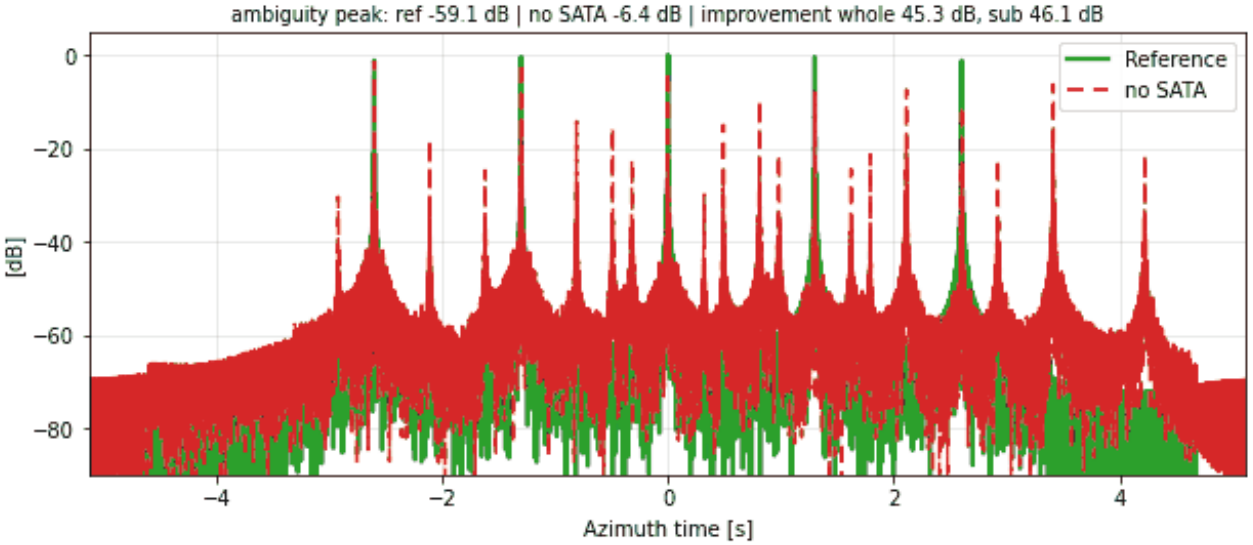



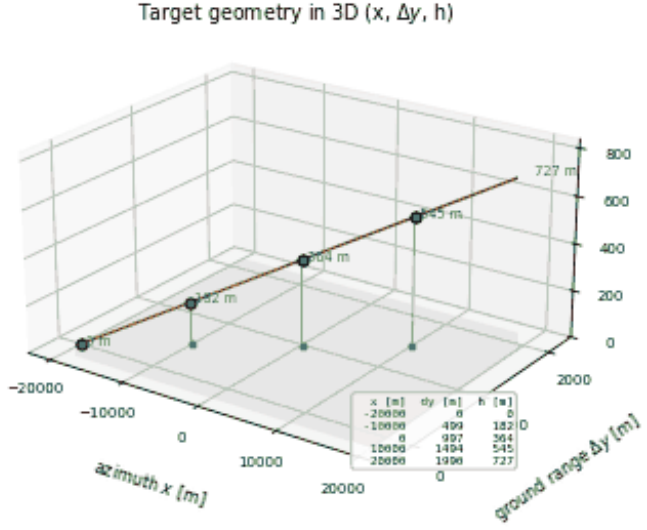



RA-LL-032 | SATA 1D | along-track ramp: N = 5, $\alpha = 4°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

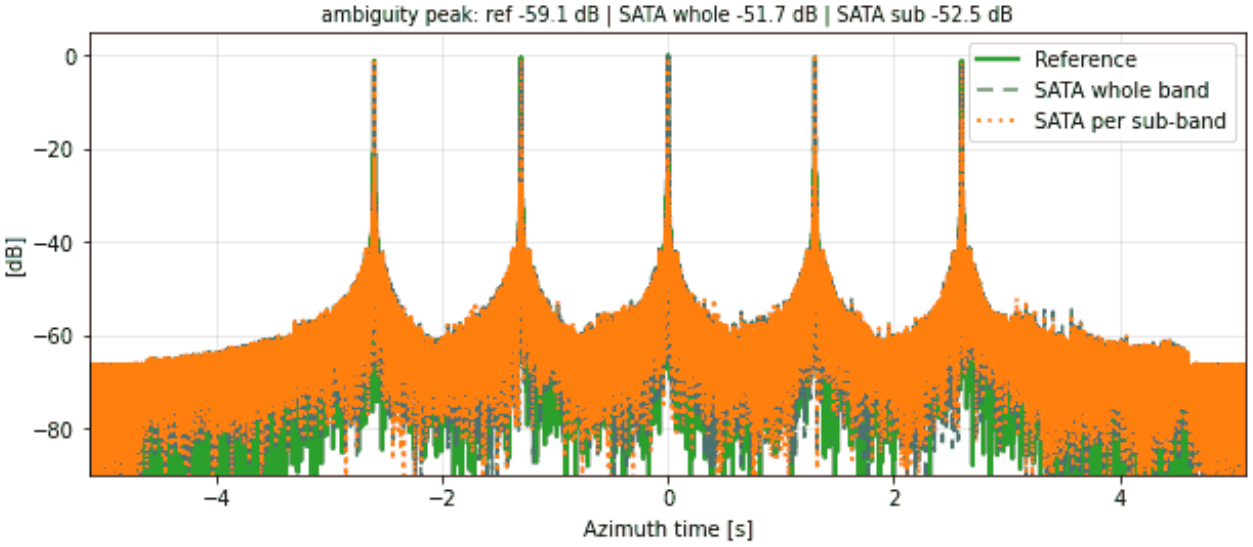

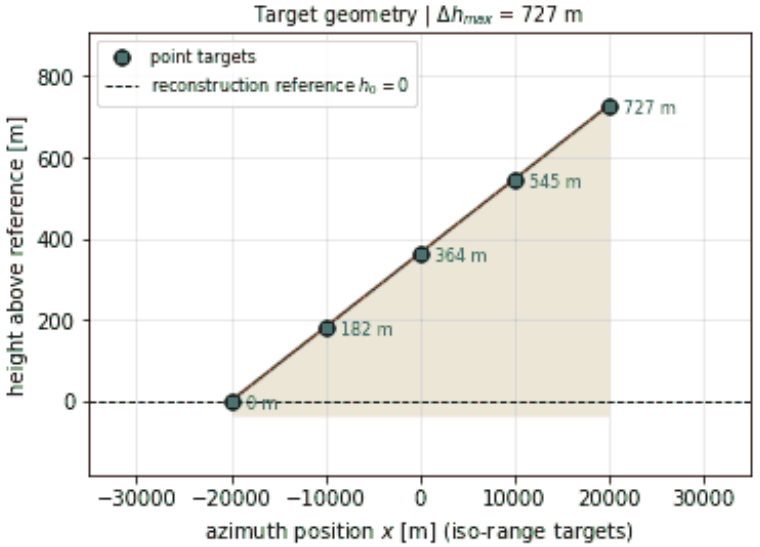



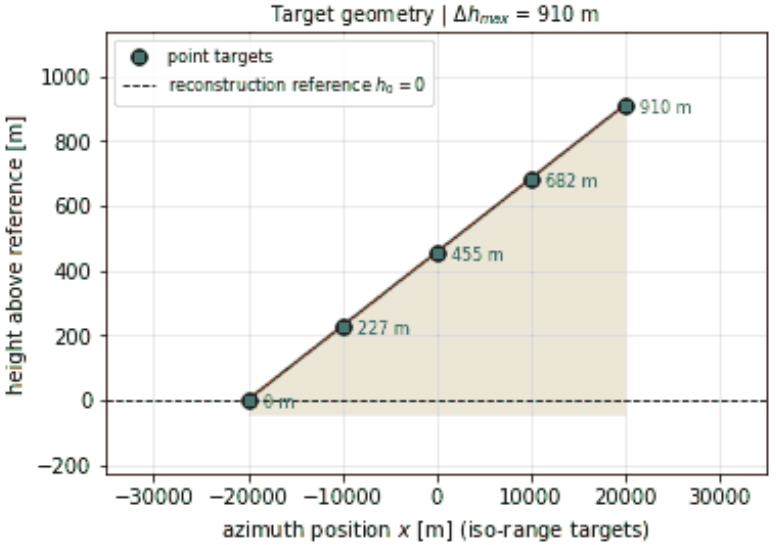



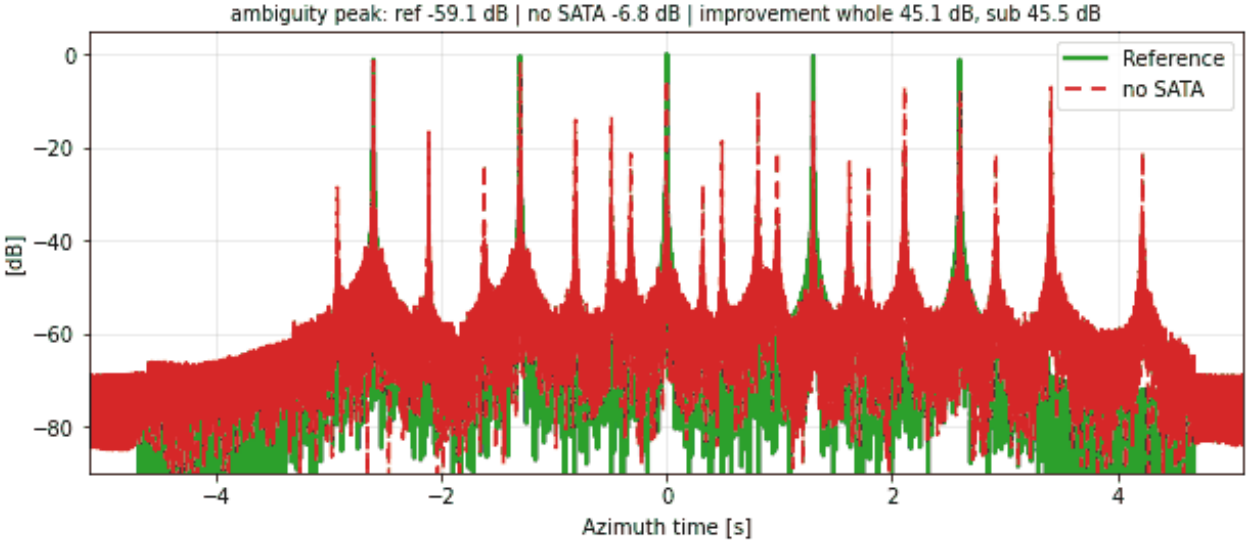

484


RA-LL-033 | SATA 1D | along-track ramp: N = 5, $\alpha = 5^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

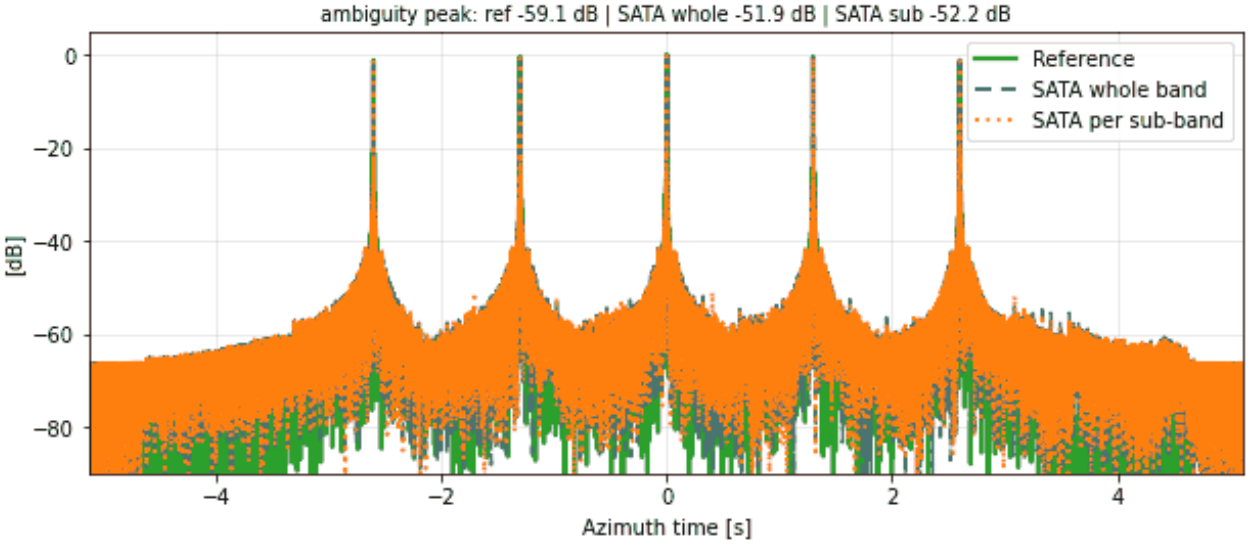






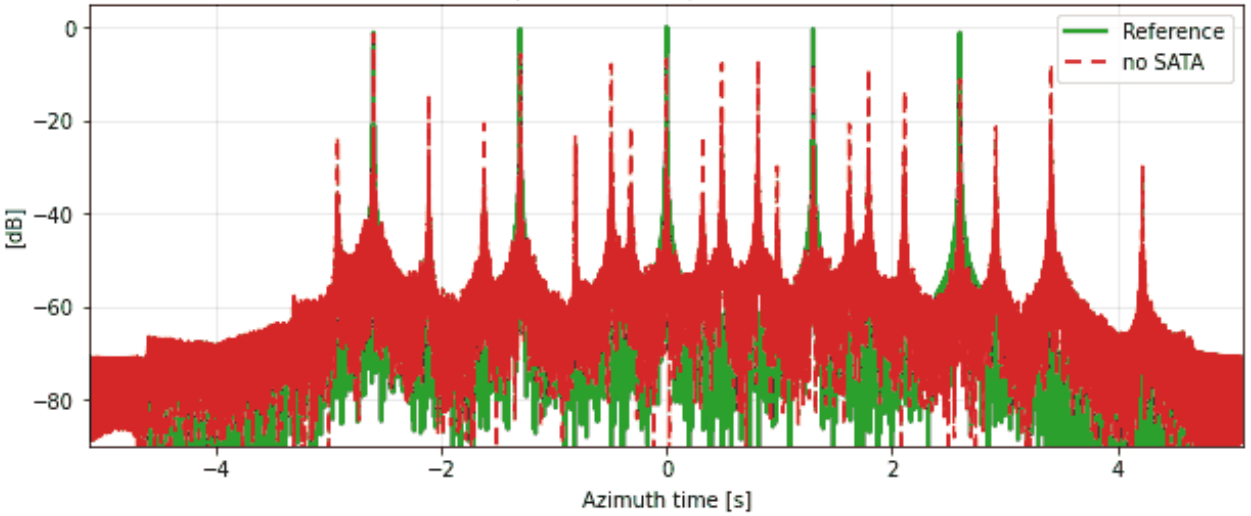


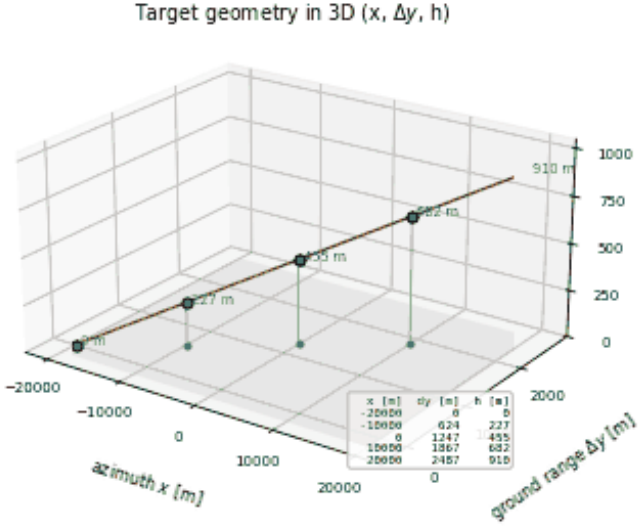
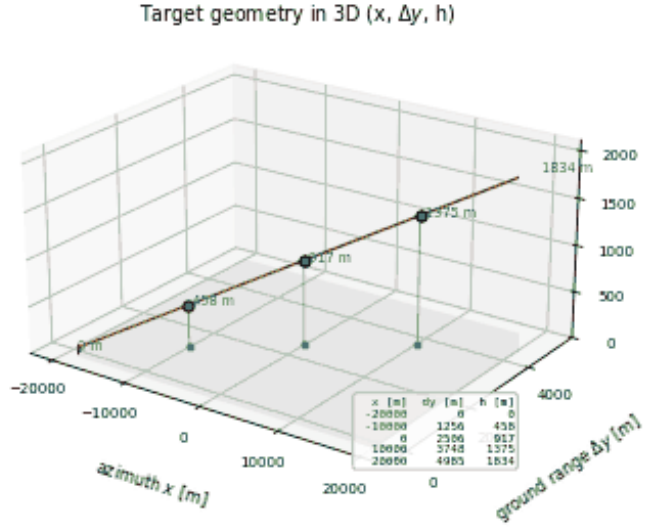



RA-LL-034 | SATA 1D | along-track ramp: N = 5, $\alpha = 10^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

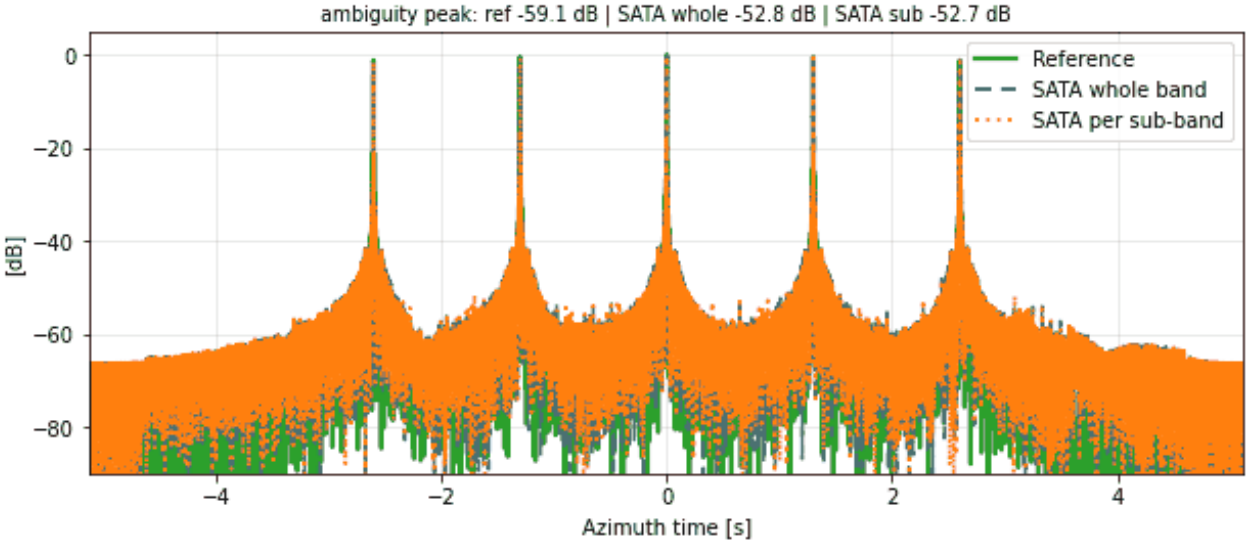


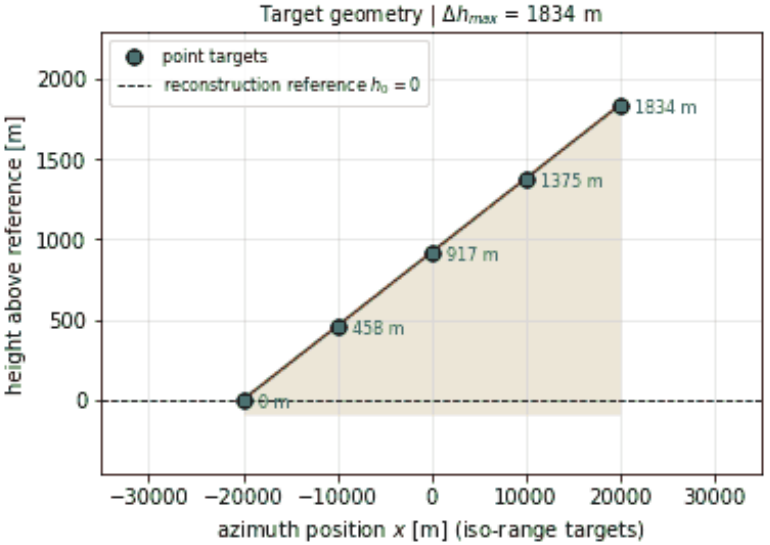



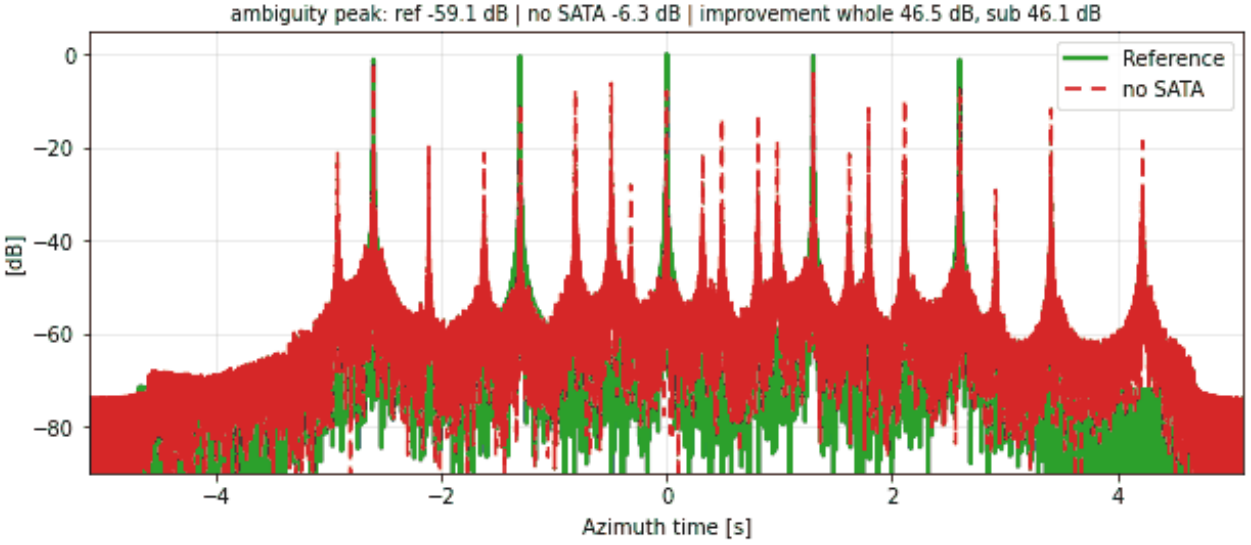



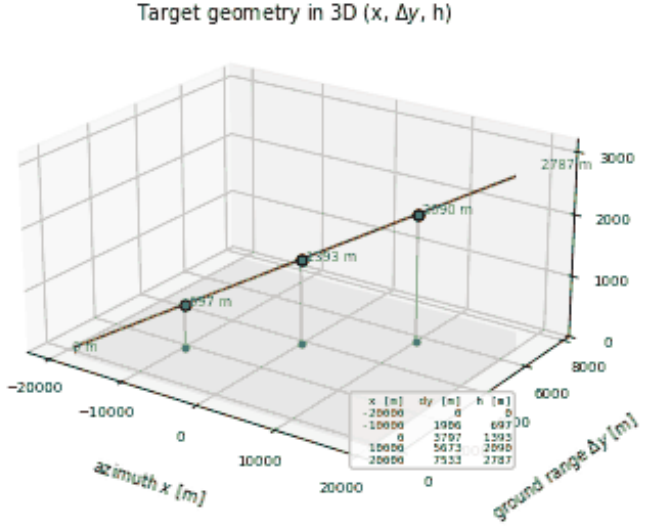



RA-LL-035 | SATA 1D | along-track ramp: N = 5, $\alpha = 15^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

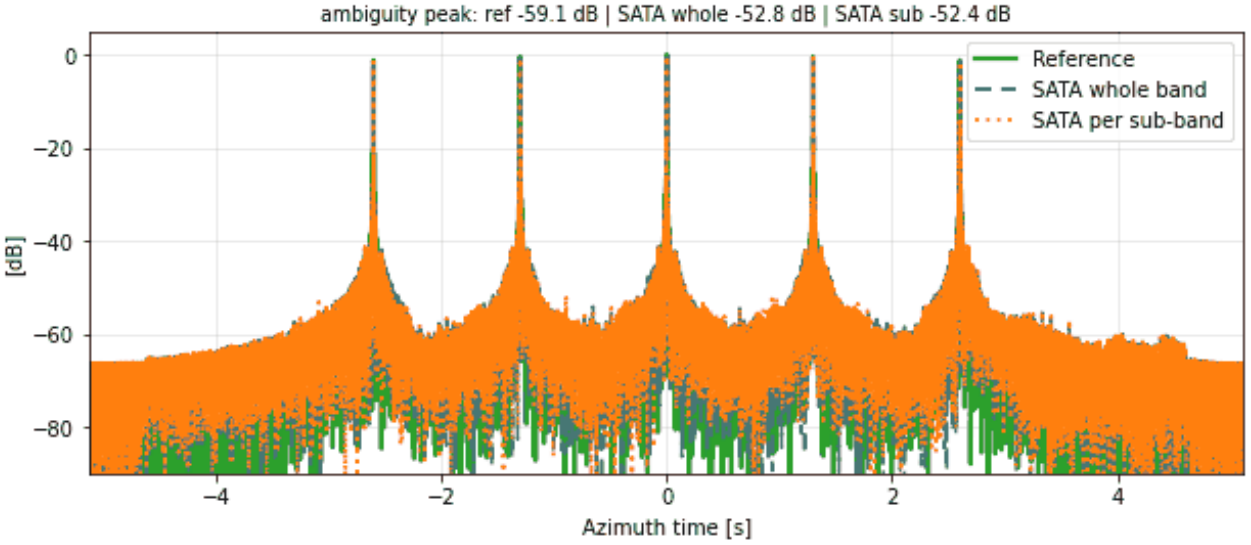


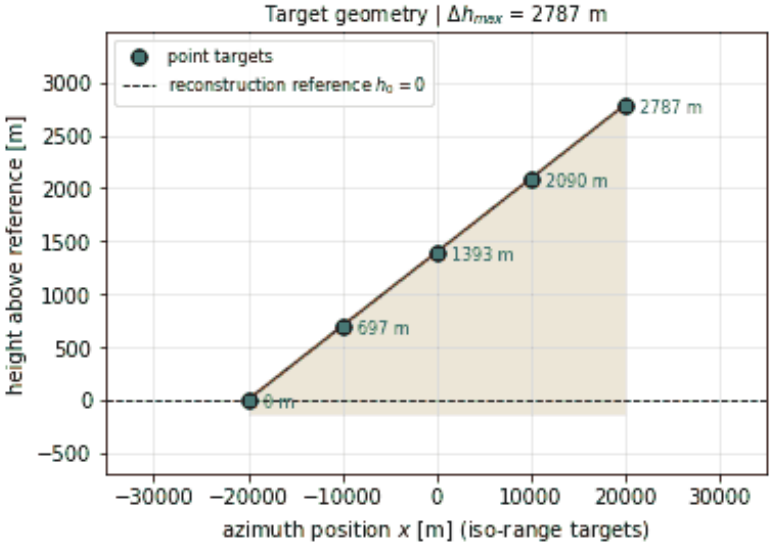



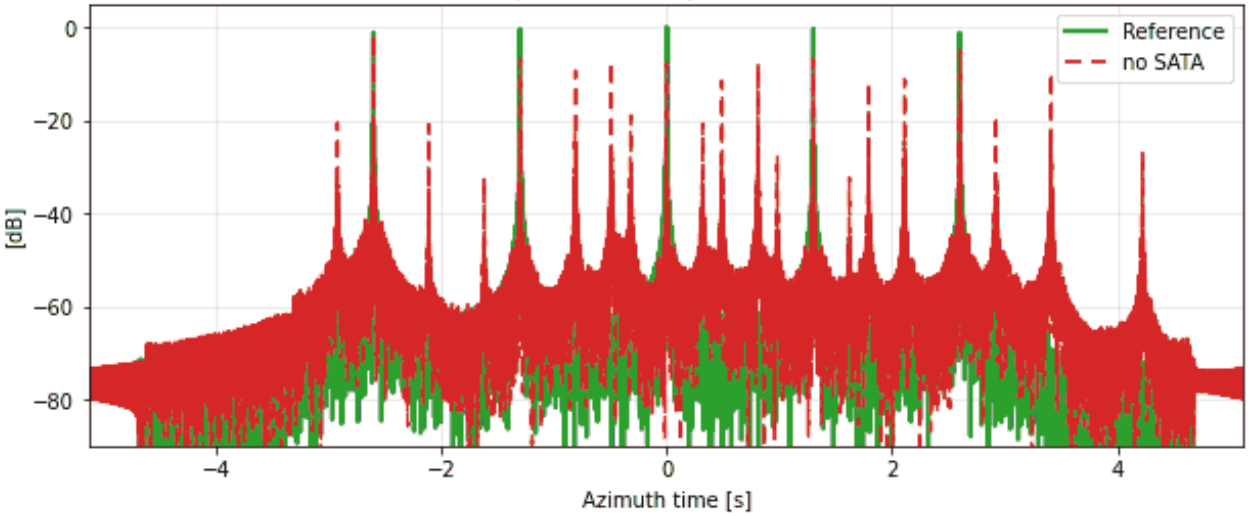



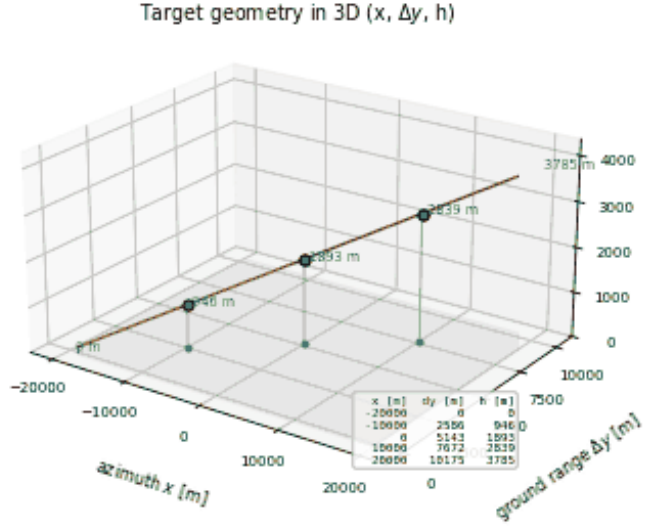



RA-LL-036 | SATA 1D | along-track ramp: N = 5, $\alpha = 20^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a = 1235$ Hz | $\Delta b_{at} = 7.69$ m (DPCA)

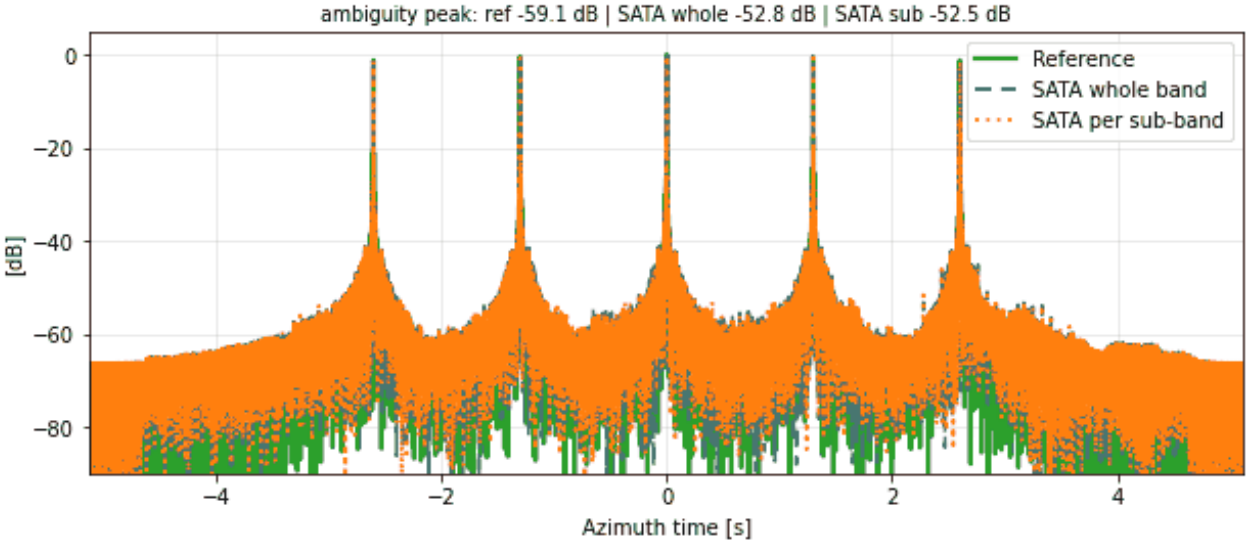


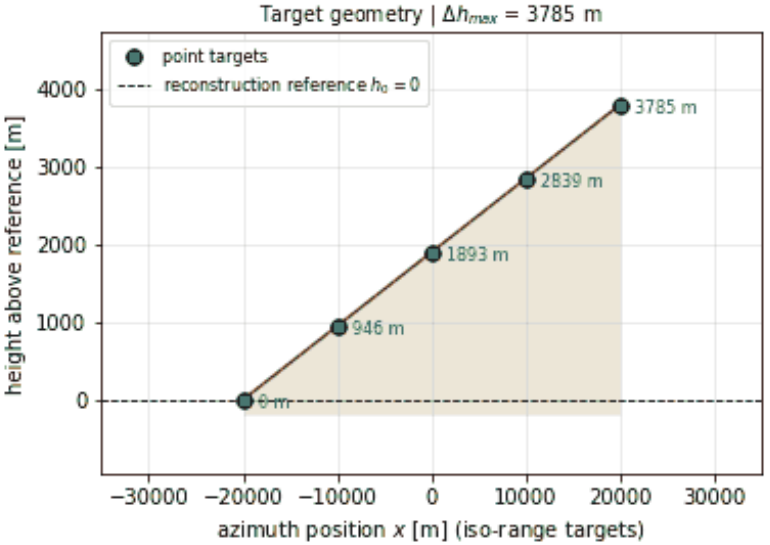



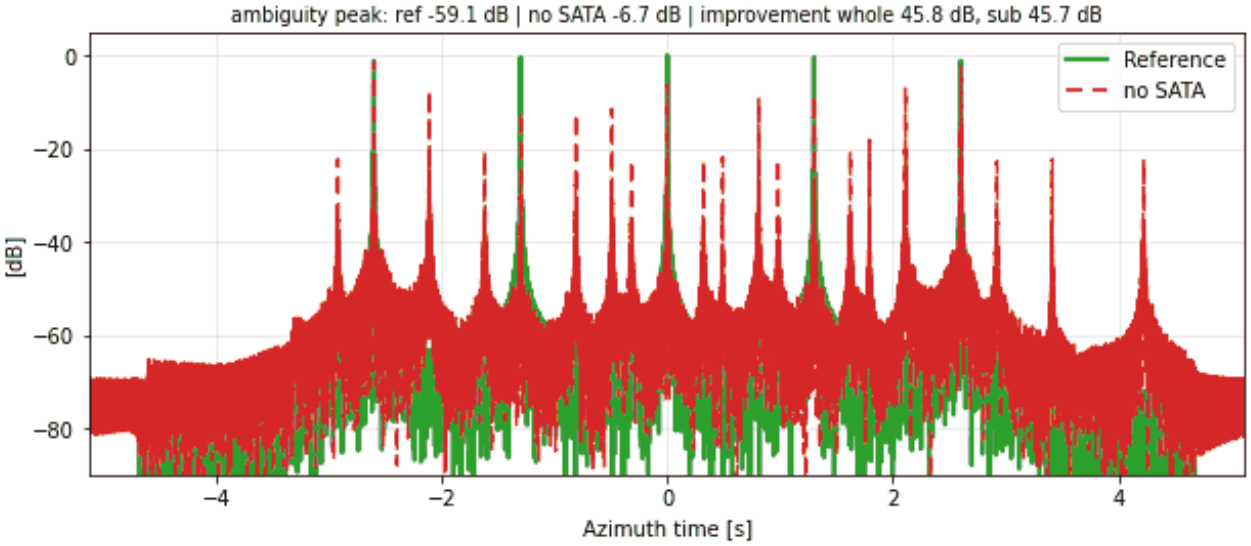



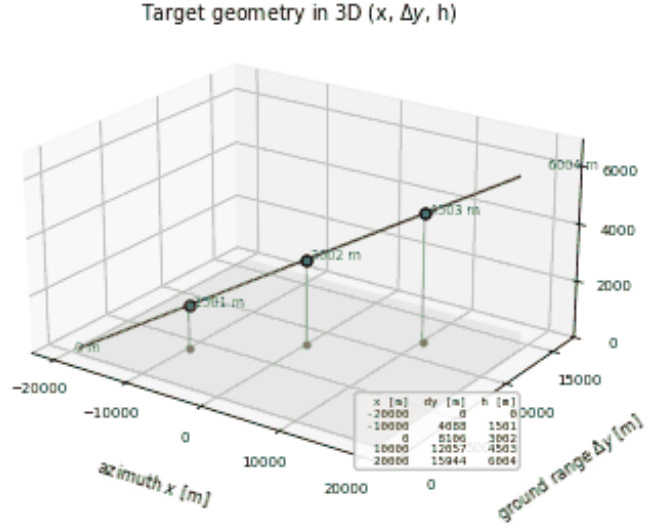



RA-LL-037 | SATA 1D | along-track ramp: N = 5, $\alpha = 30^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights
$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx} = 4$ | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

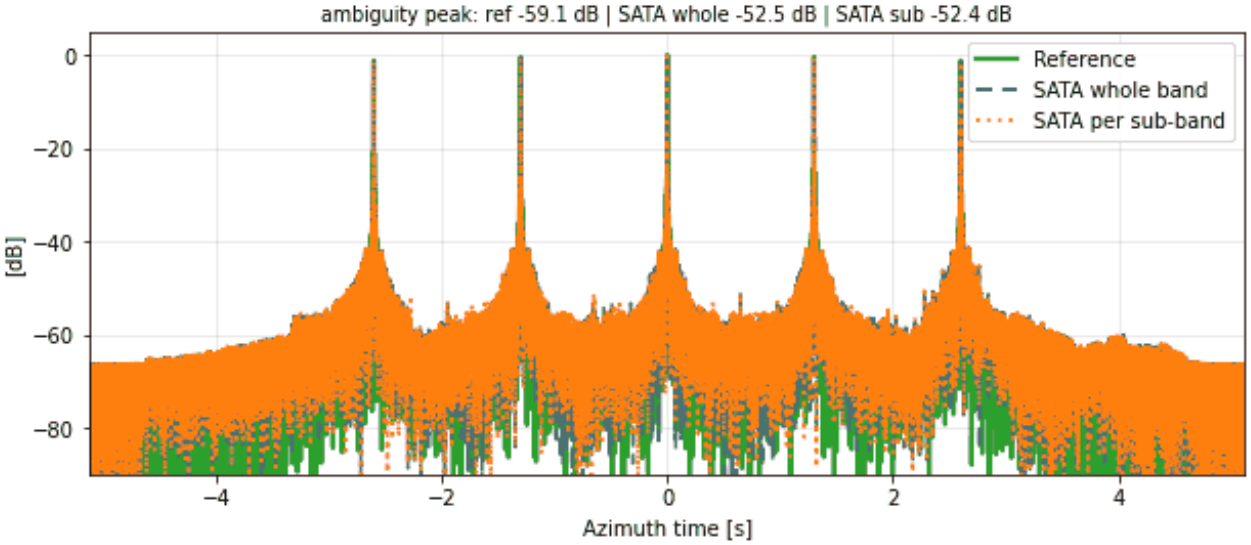

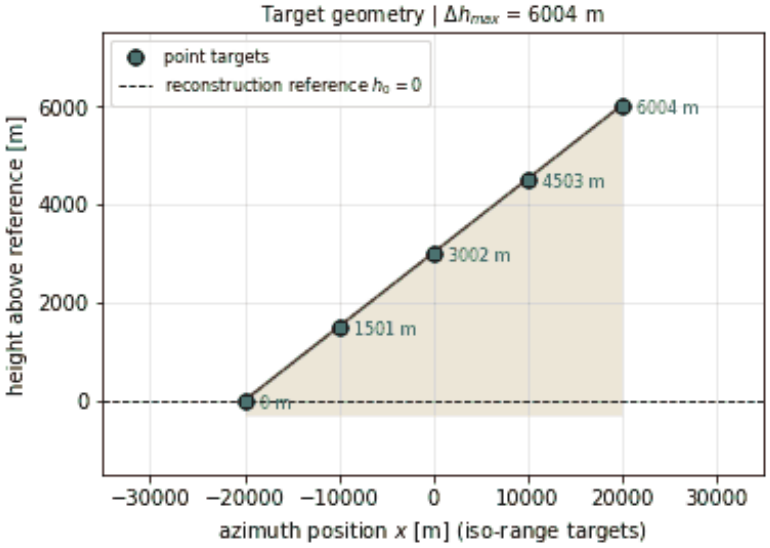



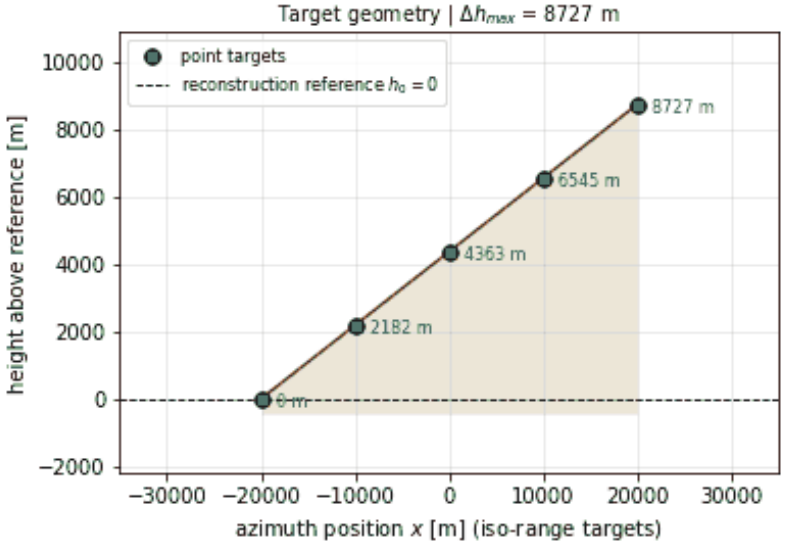



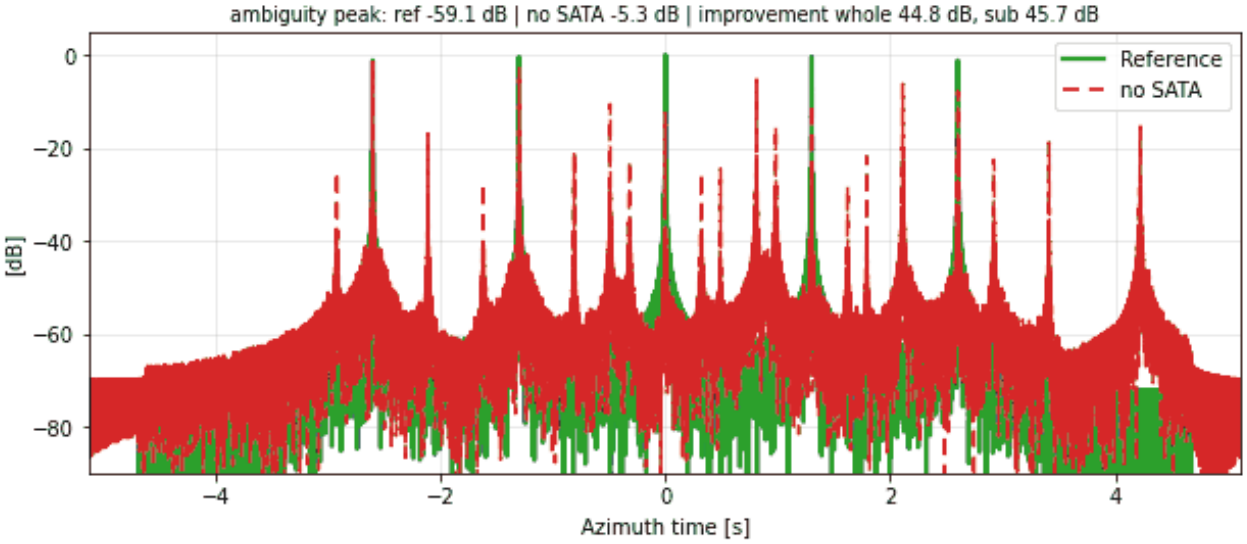



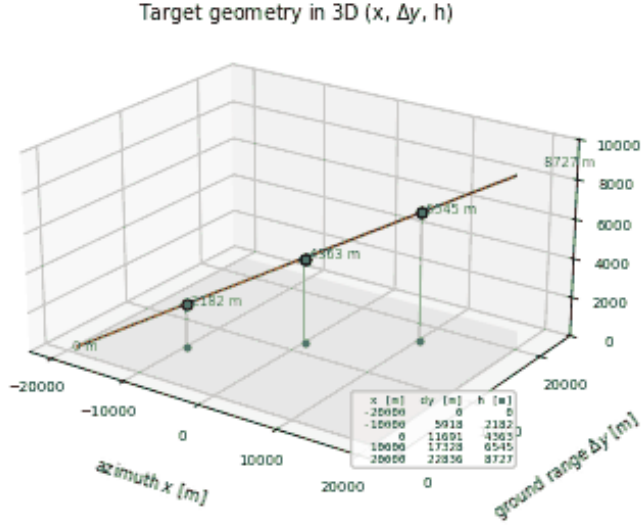
RA-LL-038 | SATA 1D | along-track ramp: N = 5, $\alpha = 40^\circ$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

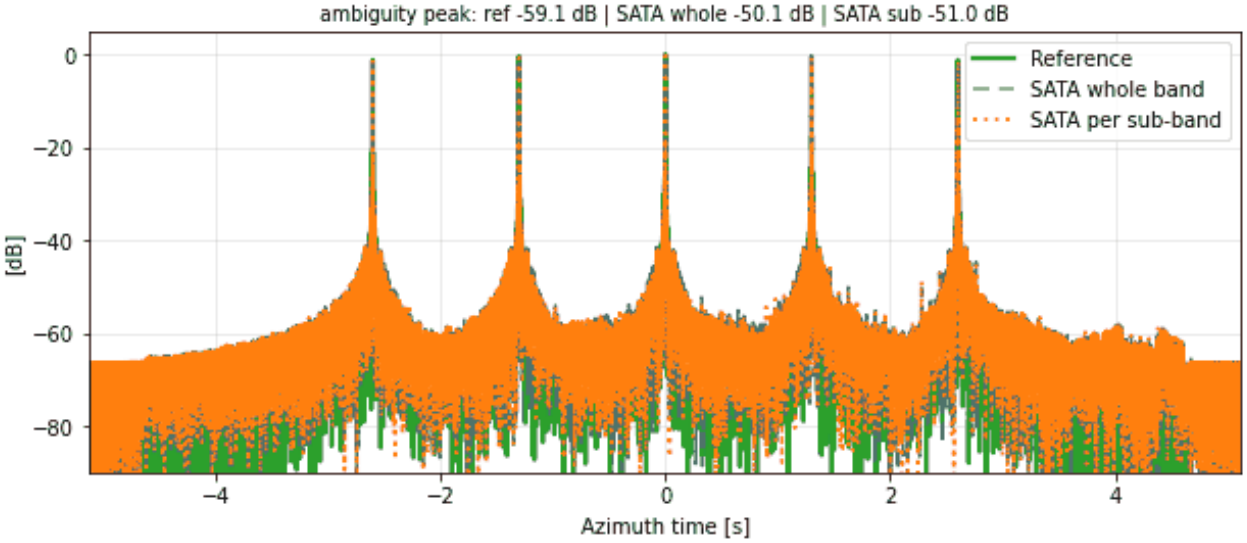

RA-LL-039 | SATA 1D | along-track ramp: N = 5, $\alpha = 50°$ (heights $j \cdot 2600\tan\alpha$), targets 10 km apart (large distance), large heights

$b_{xt}$ = [63.7, 27.0, 4.1, 1.7] m | $N_{rx}$ = 4 | PRF = 2000 Hz | $B_a$ = 1235 Hz | $\Delta b_{at}$ = 7.69 m (DPCA)

