



SATA 1D, random heights, targets 200 m apart (small distance), small heights (heights $\sim U(0, h_{max})$, h_{max} = 10, 50, 100 m)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m

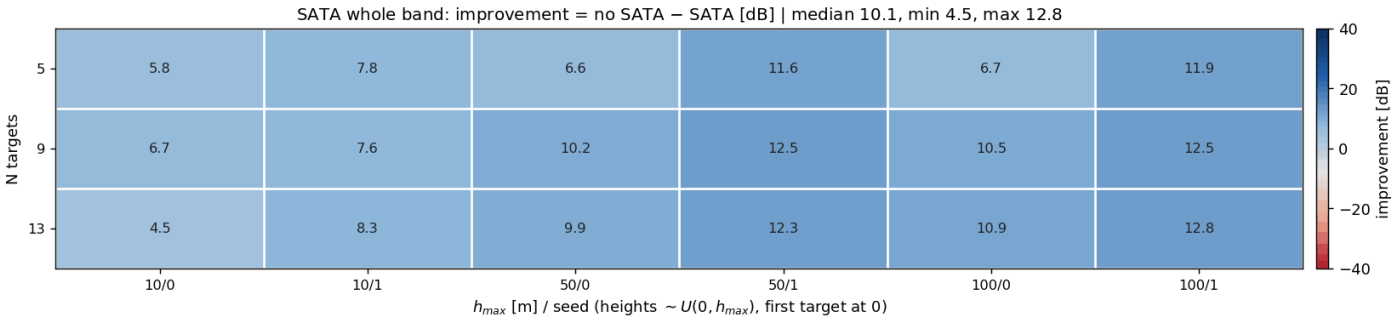


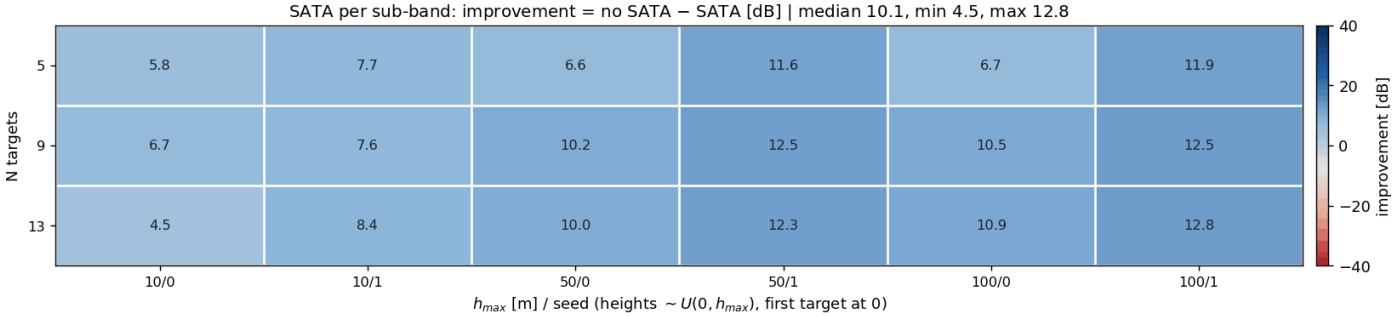


SATA 1D, random heights, targets 200 m apart (small distance), small heights (heights $\sim U(0, h_{max})$, h_{max} = 10, 50, 100 m)
ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m

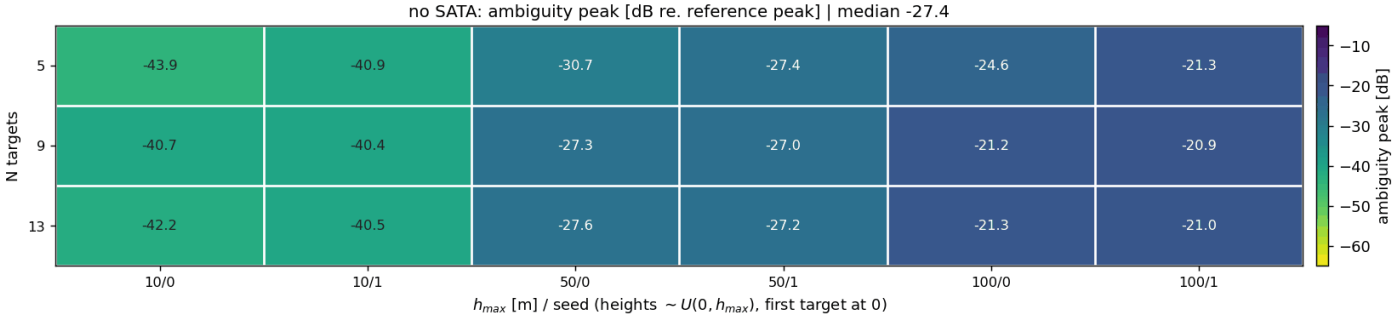


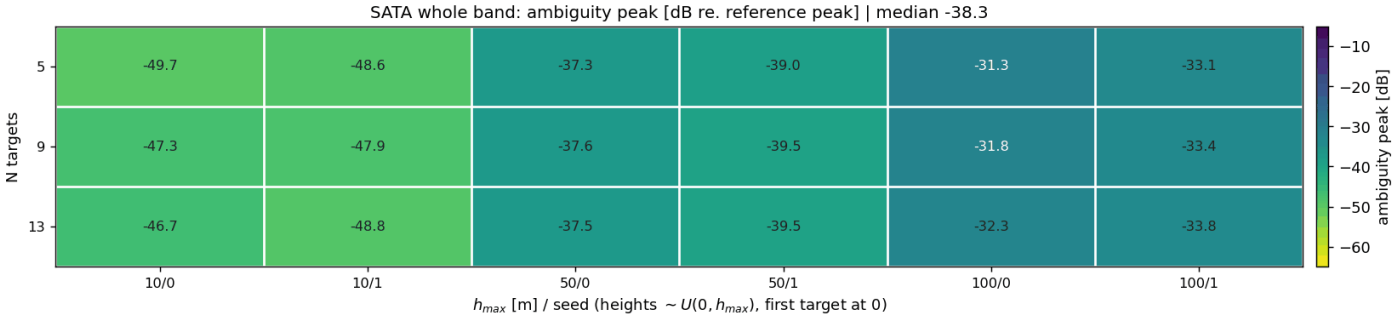

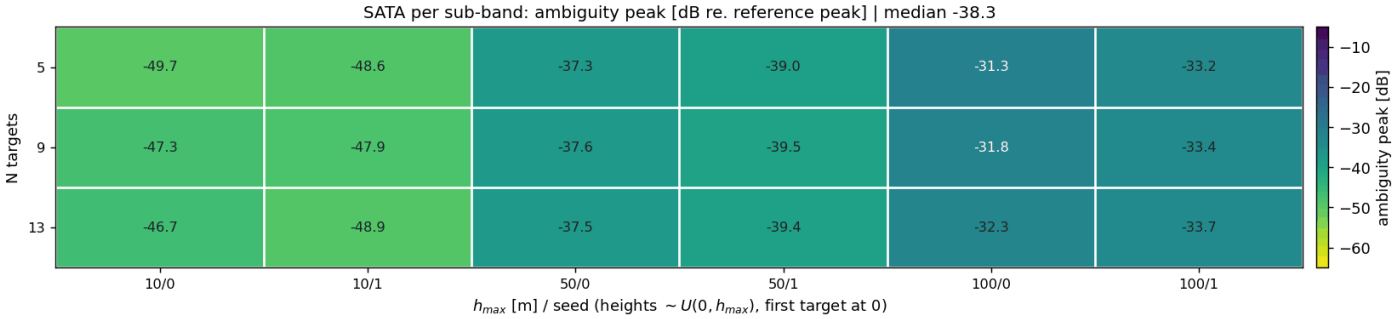



SATA 1D, random heights, targets 200 m apart (small distance), normal heights (heights $\sim U(0, h_{max})$, h_{max} = 100, 500, 1000 m)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m

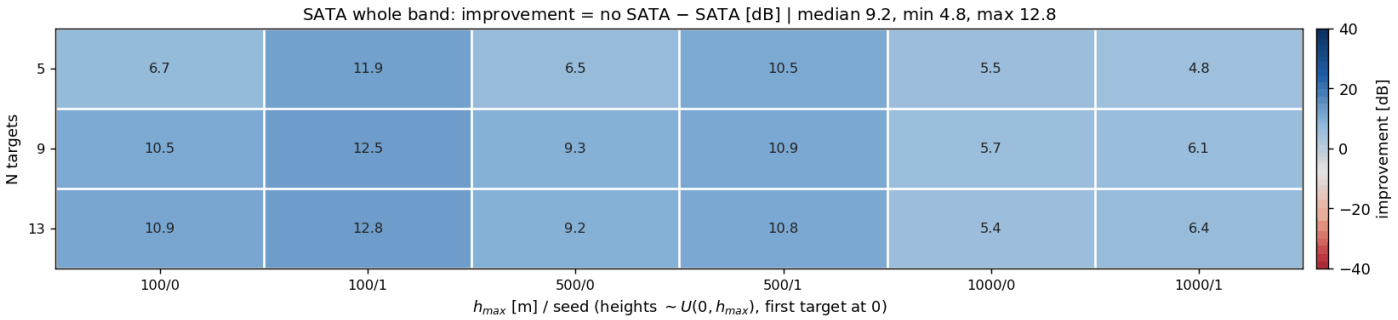


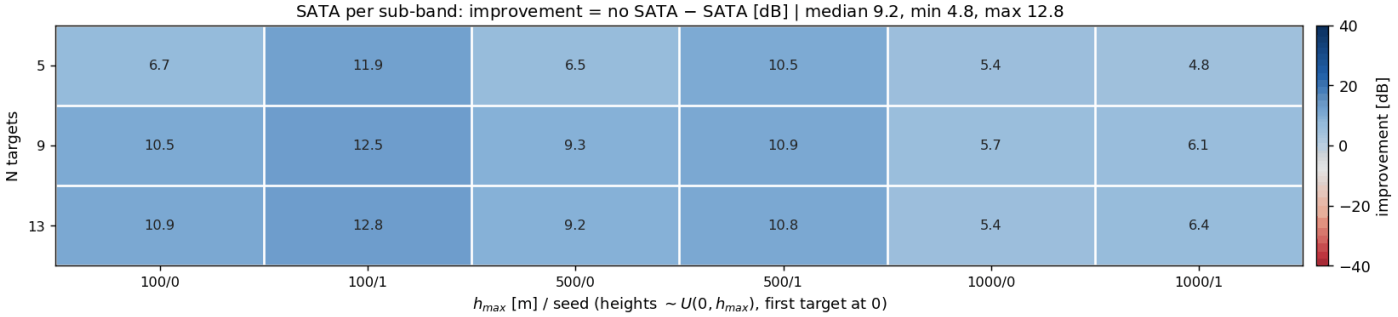


SATA 1D, random heights, targets 200 m apart (small distance), normal heights (heights $\sim U(0, h_{max})$, h_{max} = 100, 500, 1000 m)
ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m

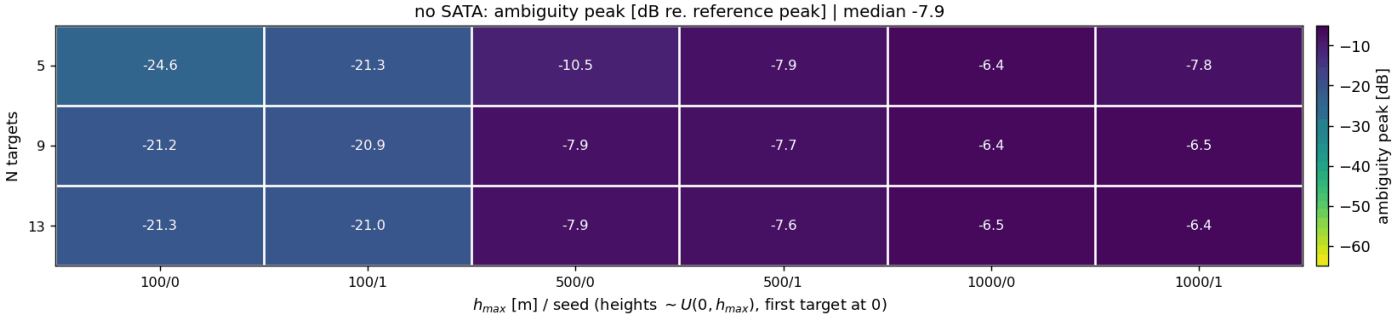


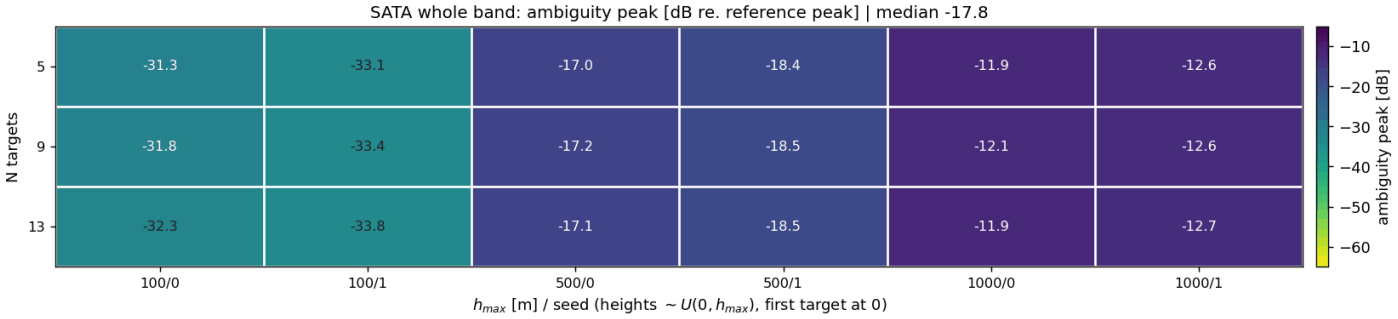

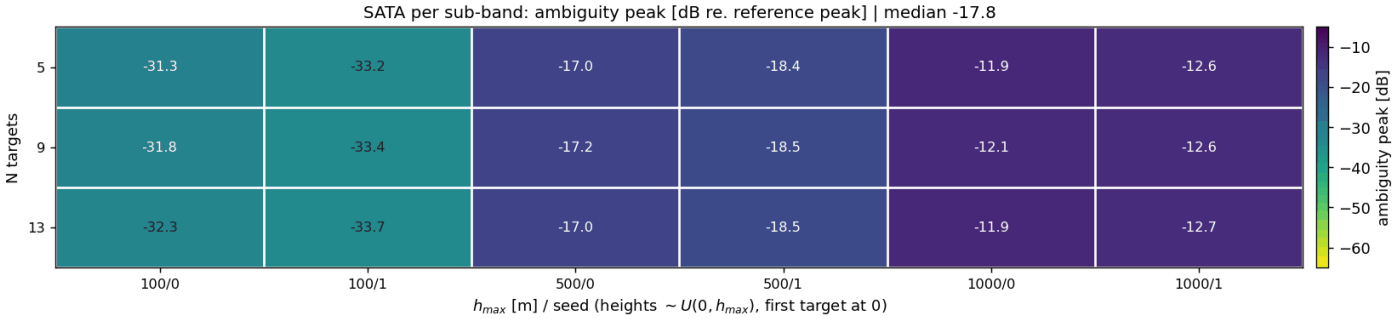



SATA 1D, random heights, targets 200 m apart (small distance), large heights (heights $\sim U(0, h_{max})$, h_{max} = 1300, 6500, 13000 m)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m

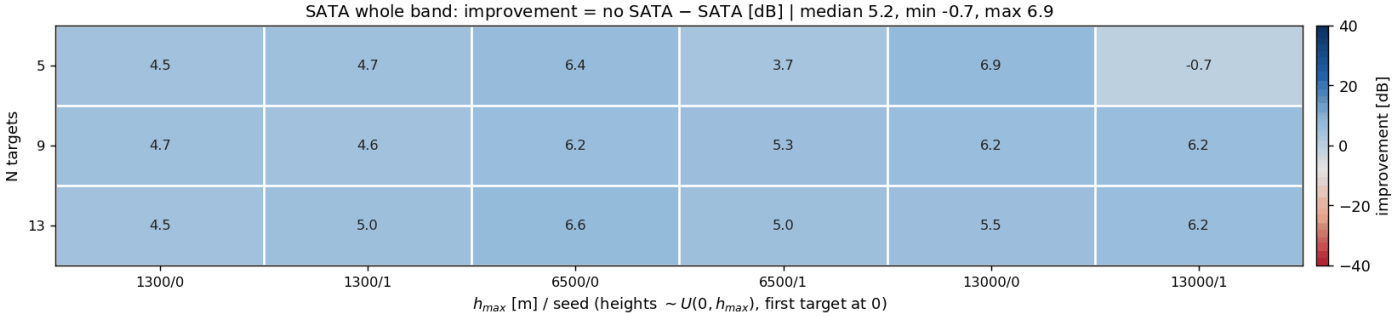


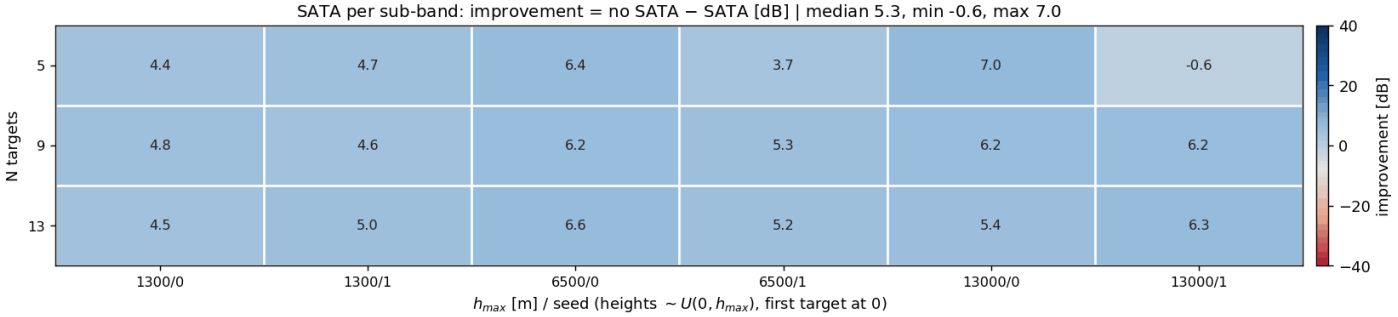



SATA 1D, random heights, targets 200 m apart (small distance), large heights (heights $\sim U(0, h_{max})$, h_{max} = 1300, 6500, 13000 m)
ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m

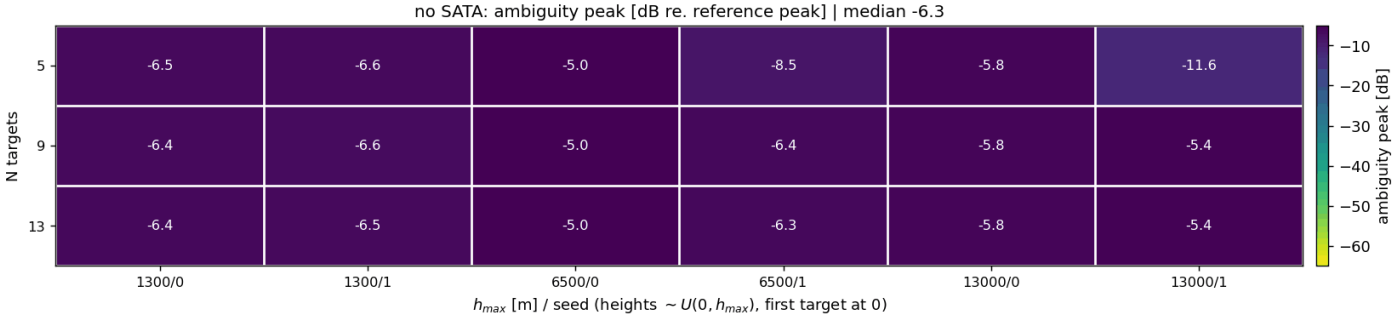


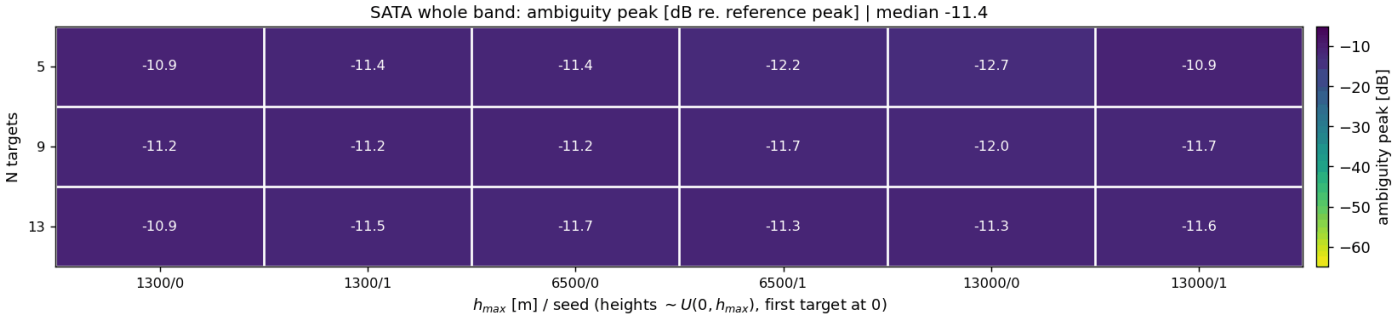


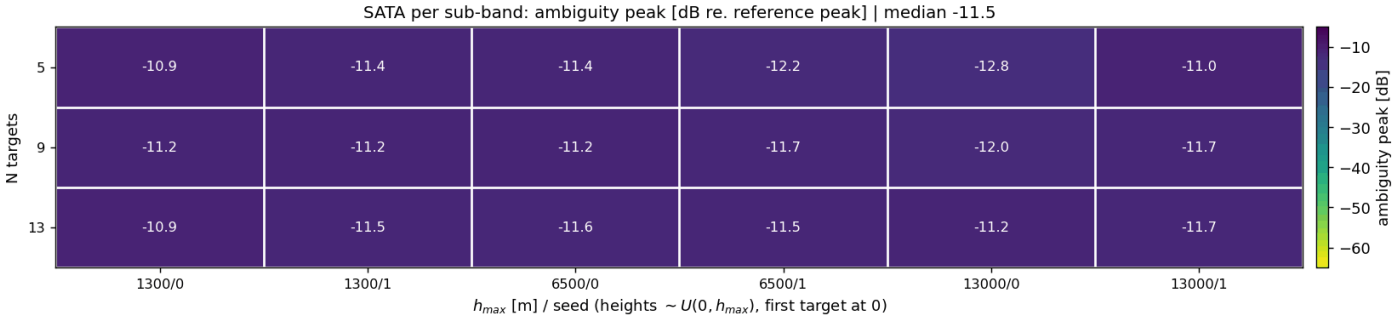

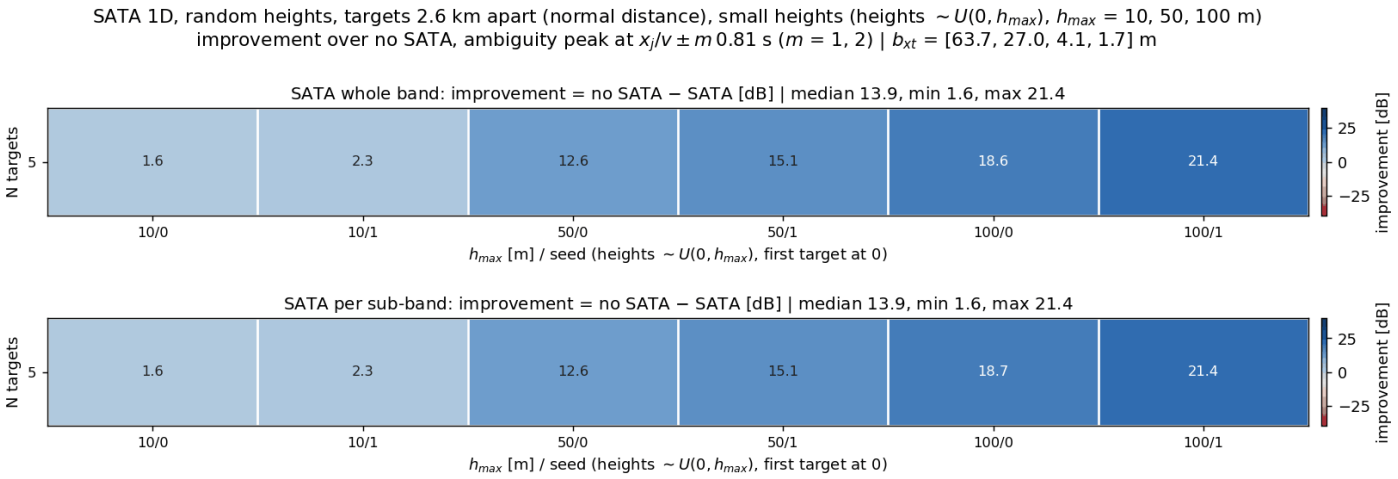

SATA 1D, random heights, targets 2.6 km apart (normal distance), small heights (heights ∼U(0, h_max), h_max = 10, 50, 100 m)
improvement over no SATA, ambiguity peak at x_j/v ± m 0.81 s (m = 1, 2) | b_xt = [63.7, 27.0, 4.1, 1.7] m
SATA whole band: improvement = no SATA − SATA [dB] | median 13.9, min 1.6, max 21.4
N targets
5
1.6
2.3
12.6
15.1
18.6
21.4
10/0
10/1
50/0
50/1
100/0
100/1
h_max [m] / seed (heights ∼U(0, h_max), first target at 0)
improvement [dB]
25
0
−25
SATA per sub-band: improvement = no SATA − SATA [dB] | median 13.9, min 1.6, max 21.4
N targets
5
1.6
2.3
12.6
15.1
18.7
21.4
10/0
10/1
50/0
50/1
100/0
100/1
h_max [m] / seed (heights ∼U(0, h_max), first target at 0)
improvement [dB]
25
0
−25

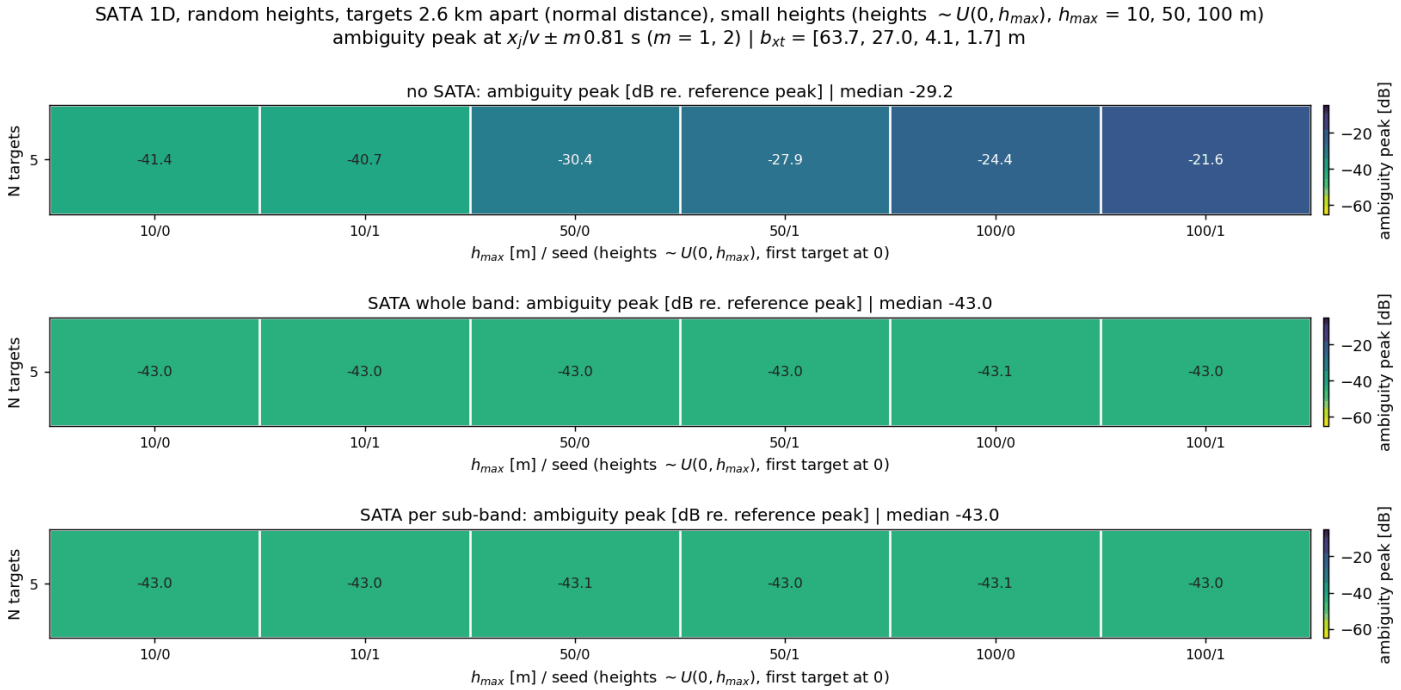

SATA 1D, random heights, targets 2.6 km apart (normal distance), small heights (heights $\sim U(0, h_{max})$, h_{max} = 10, 50, 100 m)
ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
no SATA: ambiguity peak [dB re. reference peak] | median -29.2
N targets
5
-41.4
-40.7
-30.4
-27.9
-24.4
-21.6
10/0
10/1
50/0
50/1
100/0
100/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
ambiguity peak [dB]
−20
−40
−60
SATA whole band: ambiguity peak [dB re. reference peak] | median -43.0
N targets
5
-43.0
-43.0
-43.0
-43.0
-43.1
-43.0
10/0
10/1
50/0
50/1
100/0
100/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
ambiguity peak [dB]
−20
−40
−60
SATA per sub-band: ambiguity peak [dB re. reference peak] | median -43.0
N targets
5
-43.0
-43.0
-43.1
-43.0
-43.1
-43.0
10/0
10/1
50/0
50/1
100/0
100/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
ambiguity peak [dB]
−20
−40
−60

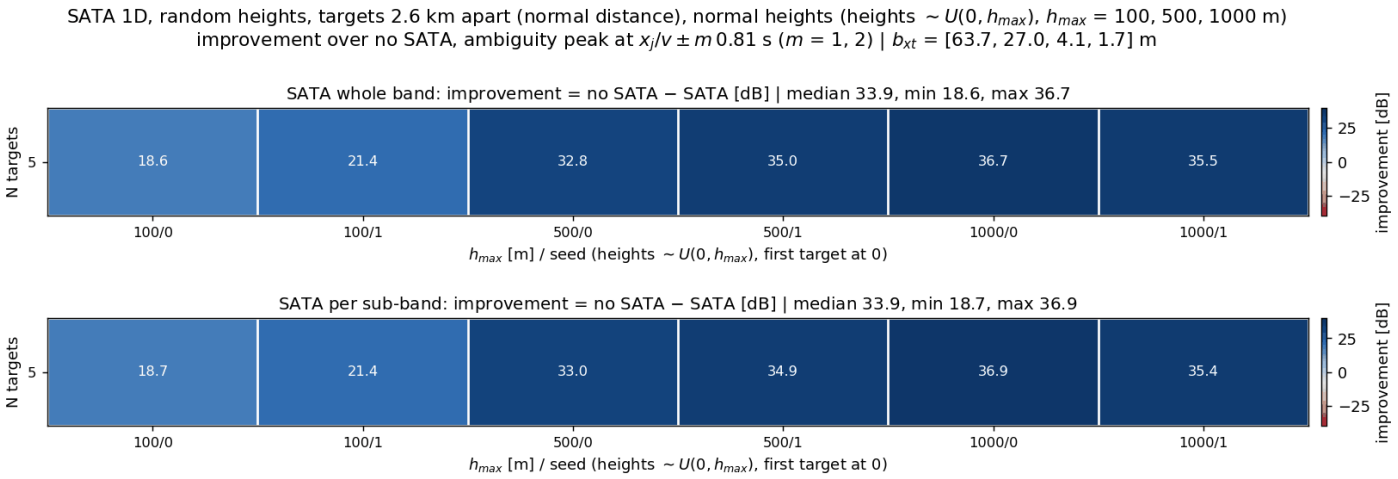

SATA 1D, random heights, targets 2.6 km apart (normal distance), normal heights (heights $\sim U(0, h_{max})$, h_{max} = 100, 500, 1000 m)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
SATA whole band: improvement = no SATA − SATA [dB] | median 33.9, min 18.6, max 36.7
N targets
5
18.6
21.4
32.8
35.0
36.7
35.5
100/0
100/1
500/0
500/1
1000/0
1000/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
25
0
−25
improvement [dB]
SATA per sub-band: improvement = no SATA − SATA [dB] | median 33.9, min 18.7, max 36.9
N targets
5
18.7
21.4
33.0
34.9
36.9
35.4
100/0
100/1
500/0
500/1
1000/0
1000/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
25
0
−25
improvement [dB]

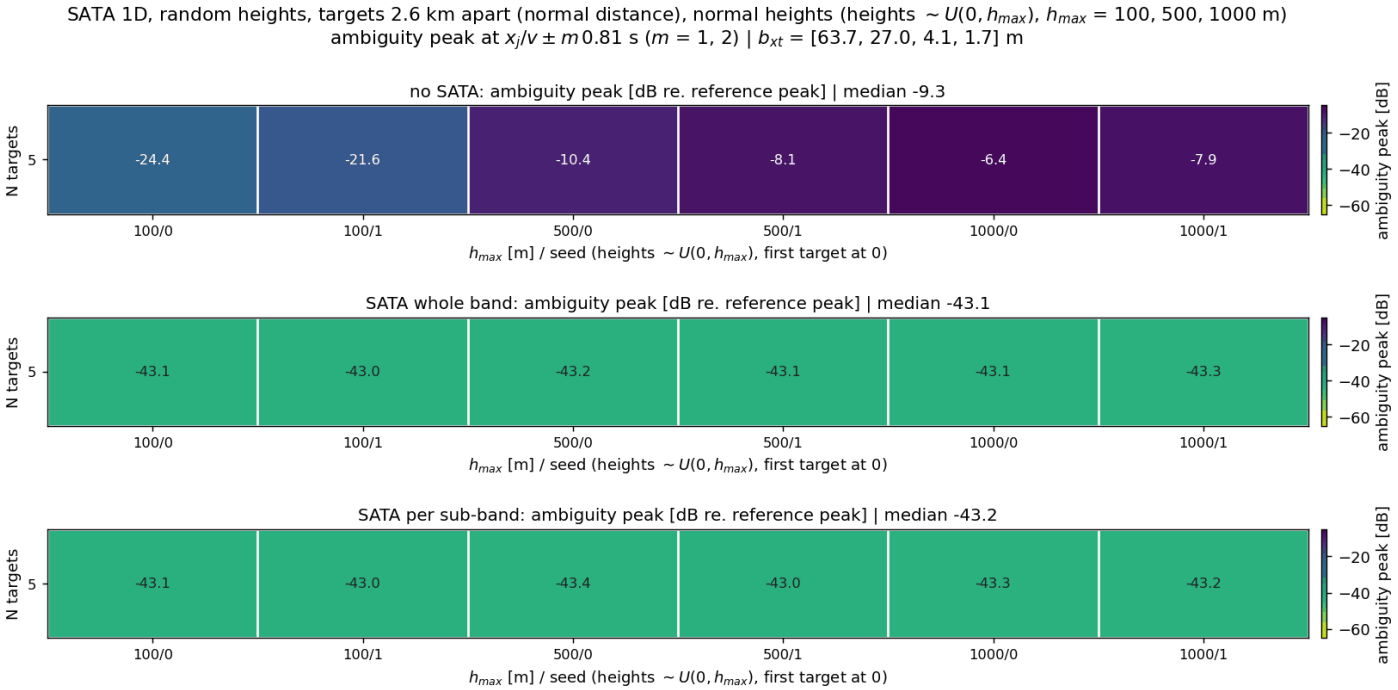
SATA 1D, random heights, targets 2.6 km apart (normal distance), normal heights (heights ~ U(0, h_max), h_max = 100, 500, 1000 m)
ambiguity peak at x_j/v ± m 0.81 s (m = 1, 2) | b_xt = [63.7, 27.0, 4.1, 1.7] m
no SATA: ambiguity peak [dB re. reference peak] | median -9.3
N targets
5
-24.4
-21.6
-10.4
-8.1
-6.4
-7.9
100/0
100/1
500/0
500/1
1000/0
1000/1
h_max [m] / seed (heights ~ U(0, h_max), first target at 0)
ambiguity peak [dB]
−20
−40
−60
SATA whole band: ambiguity peak [dB re. reference peak] | median -43.1
N targets
5
-43.1
-43.0
-43.2
-43.1
-43.1
-43.3
100/0
100/1
500/0
500/1
1000/0
1000/1
h_max [m] / seed (heights ~ U(0, h_max), first target at 0)
ambiguity peak [dB]
−20
−40
−60
SATA per sub-band: ambiguity peak [dB re. reference peak] | median -43.2
N targets
5
-43.1
-43.0
-43.4
-43.0
-43.3
-43.2
100/0
100/1
500/0
500/1
1000/0
1000/1
h_max [m] / seed (heights ~ U(0, h_max), first target at 0)
ambiguity peak [dB]
−20
−40
−60


SATA 1D, random heights, targets 2.6 km apart (normal distance), large heights (heights $\sim U(0, h_{max})$, h_{max} = 1300, 6500, 13000 m)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m

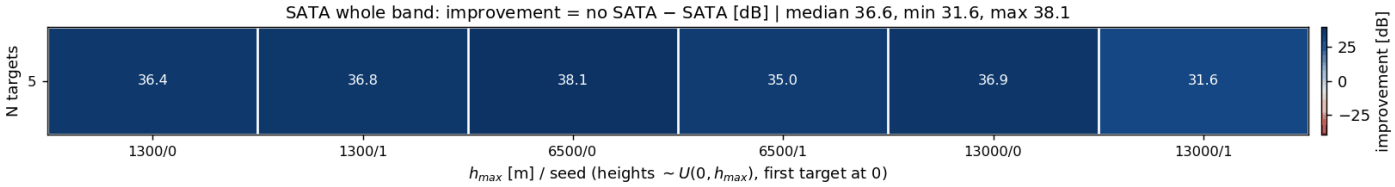


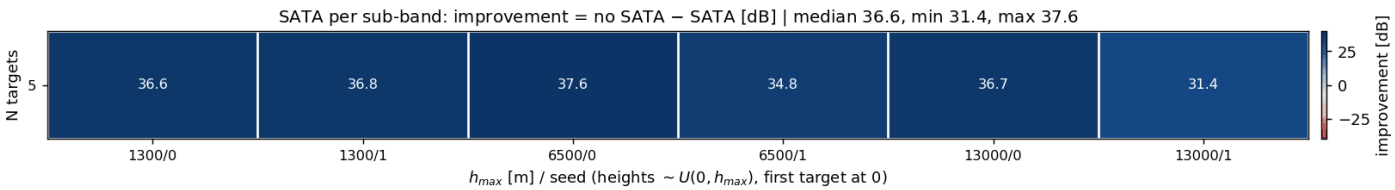


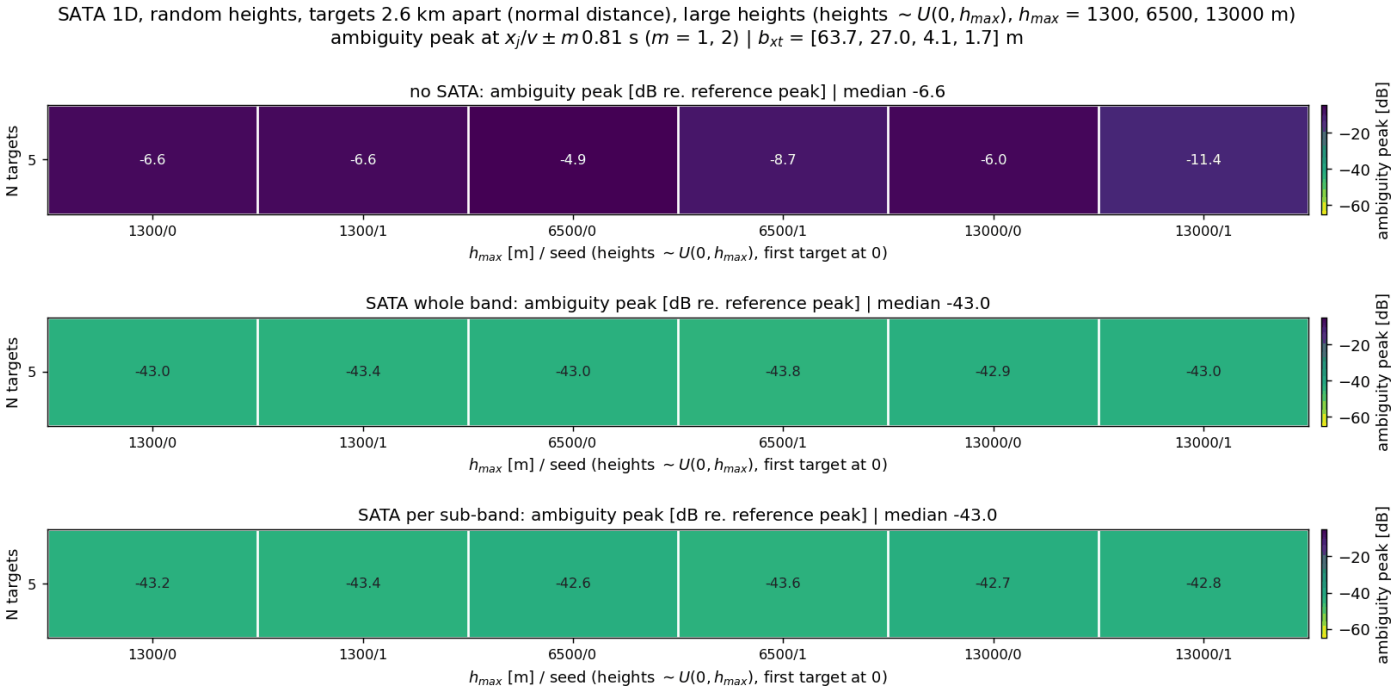

SATA 1D, random heights, targets 2.6 km apart (normal distance), large heights (heights $\sim U(0, h_{max})$, h_{max} = 1300, 6500, 13000 m)
ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
no SATA: ambiguity peak [dB re. reference peak] | median -6.6
N targets
5
-6.6
-6.6
-4.9
-8.7
-6.0
-11.4
1300/0
1300/1
6500/0
6500/1
13000/0
13000/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
ambiguity peak [dB]
−20
−40
−60
SATA whole band: ambiguity peak [dB re. reference peak] | median -43.0
N targets
5
-43.0
-43.4
-43.0
-43.8
-42.9
-43.0
1300/0
1300/1
6500/0
6500/1
13000/0
13000/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
ambiguity peak [dB]
−20
−40
−60
SATA per sub-band: ambiguity peak [dB re. reference peak] | median -43.0
N targets
5
-43.2
-43.4
-42.6
-43.6
-42.7
-42.8
1300/0
1300/1
6500/0
6500/1
13000/0
13000/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
ambiguity peak [dB]
−20
−40
−60


SATA 1D, random heights, targets 10 km apart (large distance), small heights (heights $\sim U(0, h_{max})$, h_{max} = 10, 50, 100 m)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m

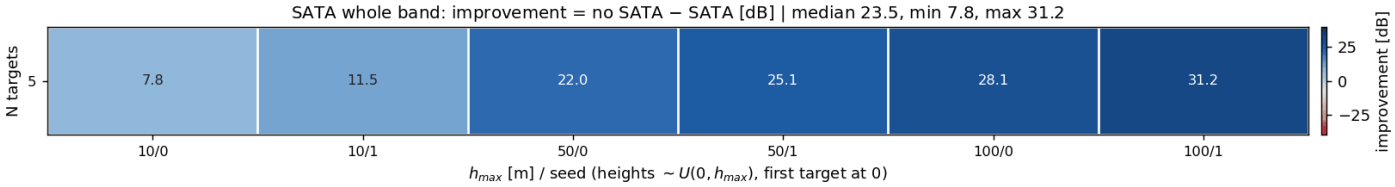

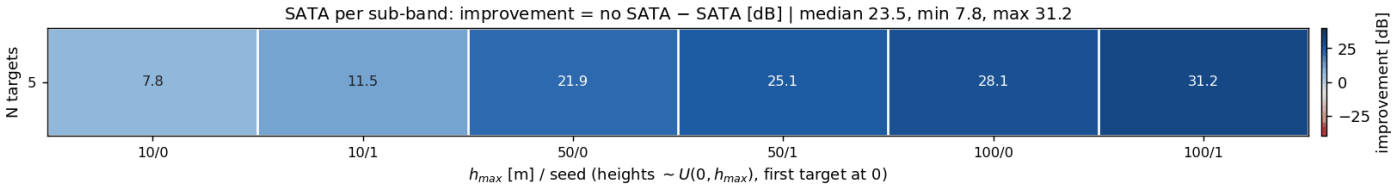


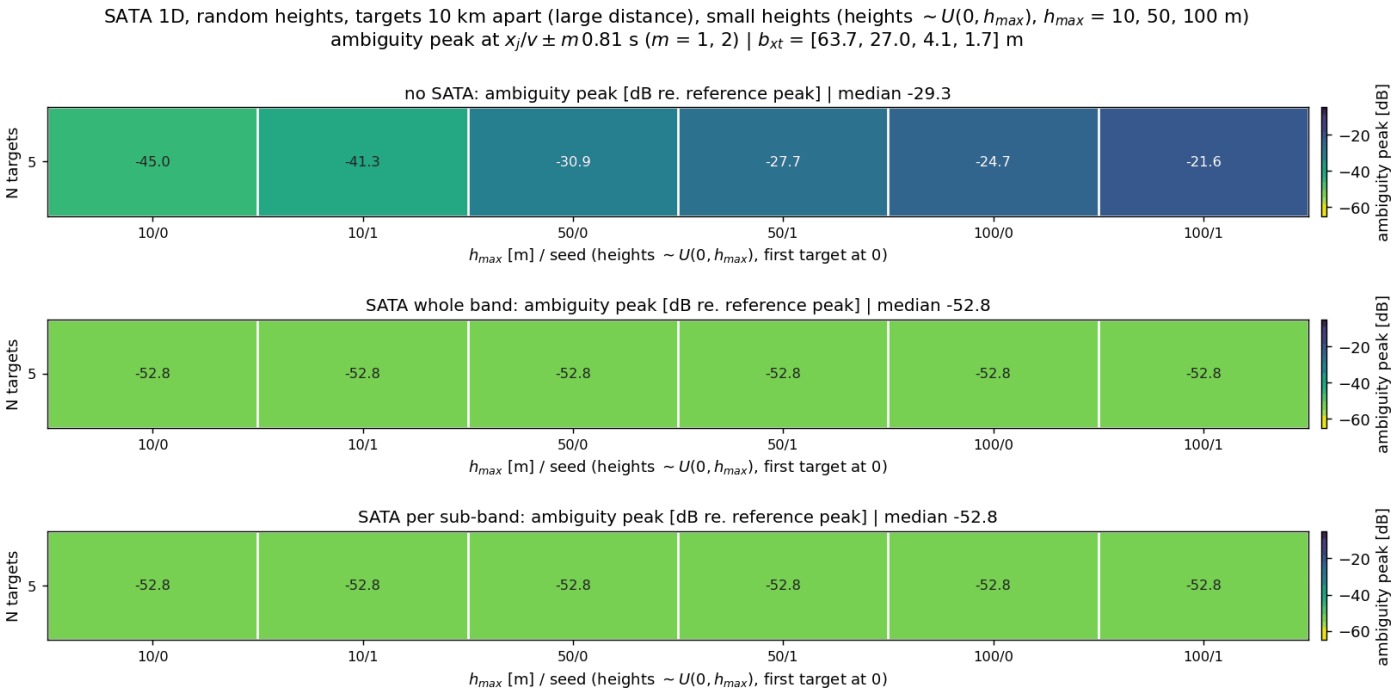

SATA 1D, random heights, targets 10 km apart (large distance), small heights (heights $\sim U(0, h_{max})$, h_{max} = 10, 50, 100 m)
ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
no SATA: ambiguity peak [dB re. reference peak] | median -29.3
N targets
5
-45.0
-41.3
-30.9
-27.7
-24.7
-21.6
10/0
10/1
50/0
50/1
100/0
100/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
ambiguity peak [dB]
−20
−40
−60
SATA whole band: ambiguity peak [dB re. reference peak] | median -52.8
N targets
5
-52.8
-52.8
-52.8
-52.8
-52.8
-52.8
10/0
10/1
50/0
50/1
100/0
100/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
ambiguity peak [dB]
−20
−40
−60
SATA per sub-band: ambiguity peak [dB re. reference peak] | median -52.8
N targets
5
-52.8
-52.8
-52.8
-52.8
-52.8
-52.8
10/0
10/1
50/0
50/1
100/0
100/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
ambiguity peak [dB]
−20
−40
−60

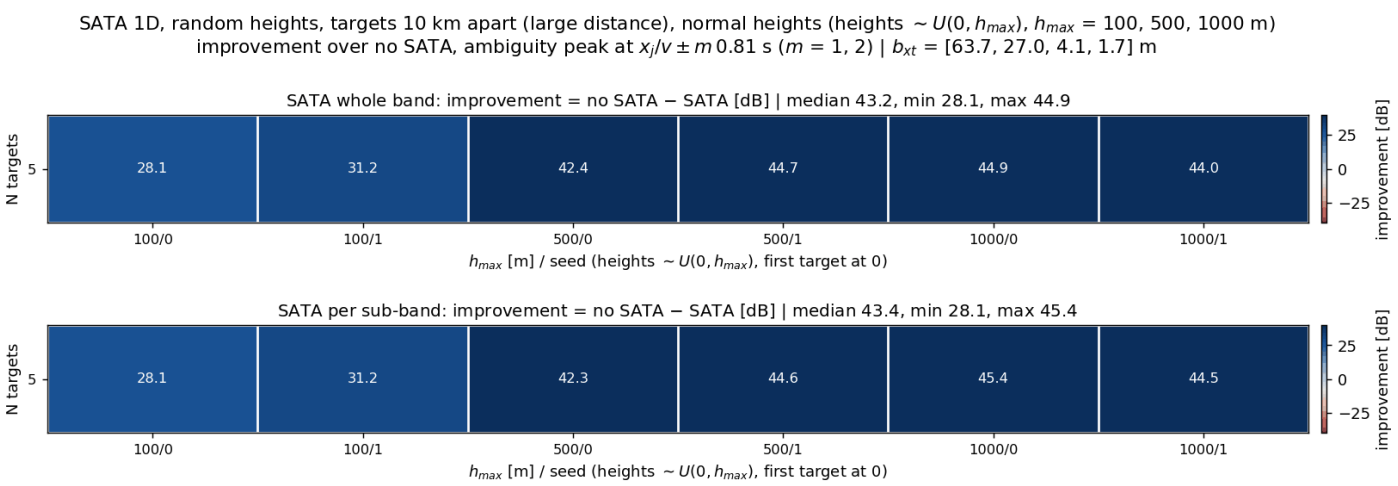

SATA 1D, random heights, targets 10 km apart (large distance), normal heights (heights $\sim U(0, h_{max})$, h_{max} = 100, 500, 1000 m)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
SATA whole band: improvement = no SATA − SATA [dB] | median 43.2, min 28.1, max 44.9
N targets
5
28.1
31.2
42.4
44.7
44.9
44.0
100/0
100/1
500/0
500/1
1000/0
1000/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
25
0
−25
improvement [dB]
SATA per sub-band: improvement = no SATA − SATA [dB] | median 43.4, min 28.1, max 45.4
N targets
5
28.1
31.2
42.3
44.6
45.4
44.5
100/0
100/1
500/0
500/1
1000/0
1000/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
25
0
−25
improvement [dB]

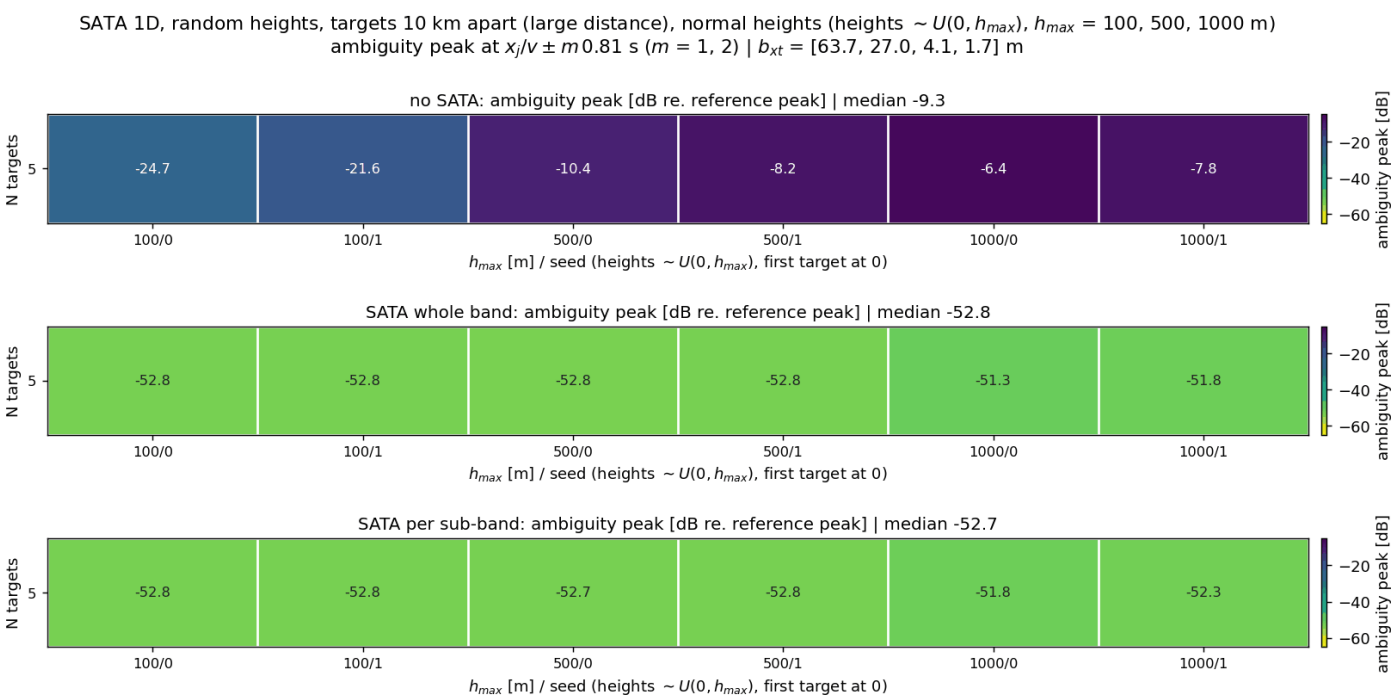
SATA 1D, random heights, targets 10 km apart (large distance), normal heights (heights $\sim U(0, h_{max})$, h_{max} = 100, 500, 1000 m)
ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
no SATA: ambiguity peak [dB re. reference peak] | median -9.3
N targets
5
-24.7
-21.6
-10.4
-8.2
-6.4
-7.8
100/0
100/1
500/0
500/1
1000/0
1000/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
ambiguity peak [dB]
−20
−40
−60
SATA whole band: ambiguity peak [dB re. reference peak] | median -52.8
N targets
5
-52.8
-52.8
-52.8
-52.8
-51.3
-51.8
100/0
100/1
500/0
500/1
1000/0
1000/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
ambiguity peak [dB]
−20
−40
−60
SATA per sub-band: ambiguity peak [dB re. reference peak] | median -52.7
N targets
5
-52.8
-52.8
-52.7
-52.8
-51.8
-52.3
100/0
100/1
500/0
500/1
1000/0
1000/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
ambiguity peak [dB]
−20
−40
−60


SATA 1D, random heights, targets 10 km apart (large distance), large heights (heights $\sim U(0, h_{max})$, h_{max} = 1300, 6500, 13000 m)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m

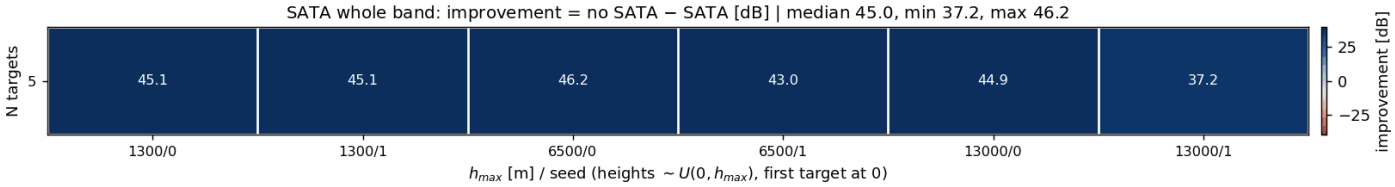


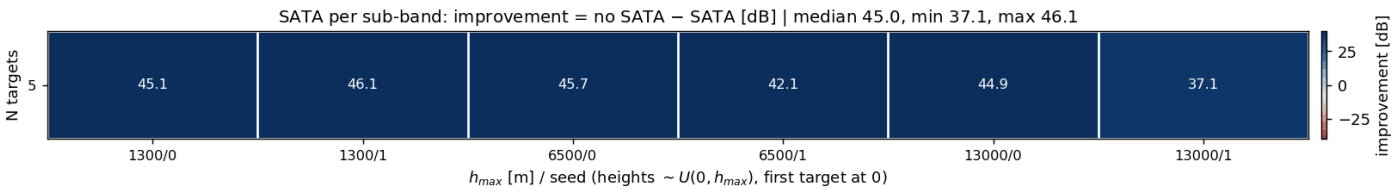

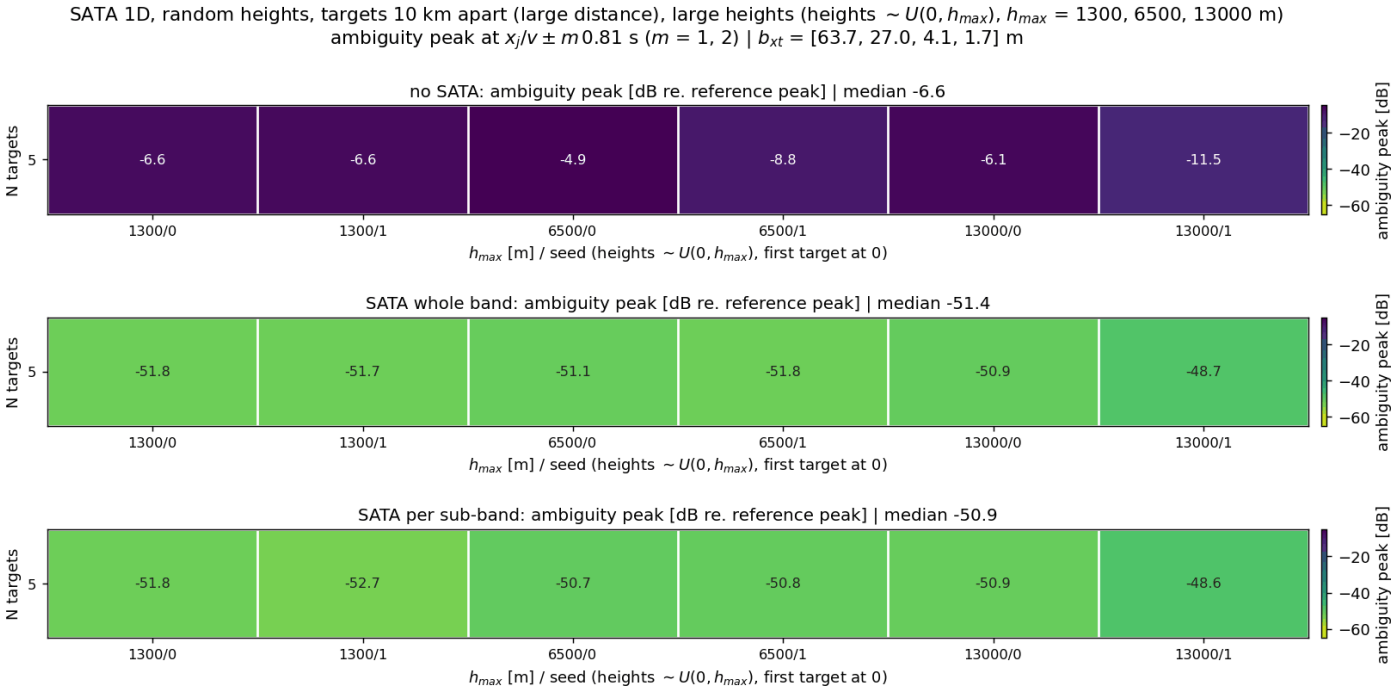

SATA 1D, random heights, targets 10 km apart (large distance), large heights (heights $\sim U(0, h_{max})$, h_{max} = 1300, 6500, 13000 m)
ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
no SATA: ambiguity peak [dB re. reference peak] | median -6.6
N targets
5
-6.6
-6.6
-4.9
-8.8
-6.1
-11.5
1300/0
1300/1
6500/0
6500/1
13000/0
13000/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
ambiguity peak [dB]
−20
−40
−60
SATA whole band: ambiguity peak [dB re. reference peak] | median -51.4
N targets
5
-51.8
-51.7
-51.1
-51.8
-50.9
-48.7
1300/0
1300/1
6500/0
6500/1
13000/0
13000/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
ambiguity peak [dB]
−20
−40
−60
SATA per sub-band: ambiguity peak [dB re. reference peak] | median -50.9
N targets
5
-51.8
-52.7
-50.7
-50.8
-50.9
-48.6
1300/0
1300/1
6500/0
6500/1
13000/0
13000/1
h_{max} [m] / seed (heights $\sim U(0, h_{max})$, first target at 0)
ambiguity peak [dB]
−20
−40
−60


SATA 1D, piecewise ramps, targets 200 m apart (small distance), small heights (random slopes over 20-m steps)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m

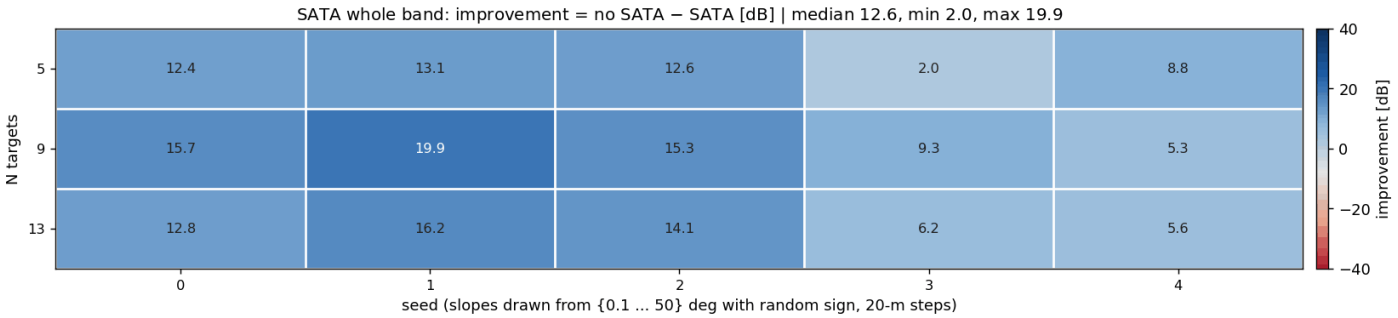


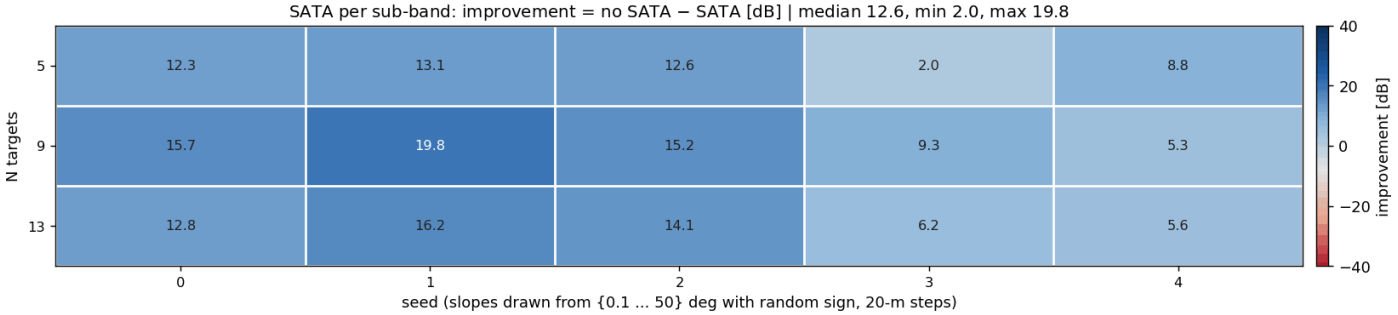




SATA 1D, piecewise ramps, targets 200 m apart (small distance), small heights (random slopes over 20-m steps)
ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
no SATA: ambiguity peak [dB re. reference peak] | median -34.4
-34.4
-33.0
-36.7
-49.1
-41.9
-31.3
-26.1
-31.1
-35.9
-41.8
-32.2
-27.5
-30.8
-39.0
-37.7
N targets
5
9
13
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 20-m steps)
ambiguity peak [dB]
−10
−20
−30
−40
−50
−60
SATA whole band: ambiguity peak [dB re. reference peak] | median -46.1
-46.8
-46.1
-49.3
-51.1
-50.7
-47.0
-46.0
-46.4
-45.2
-47.1
-45.0
-43.7
-44.9
-45.2
-43.2
N targets
5
9
13
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 20-m steps)
ambiguity peak [dB]
−10
−20
−30
−40
−50
−60
SATA per sub-band: ambiguity peak [dB re. reference peak] | median -46.2
-46.7
-46.2
-49.3
-51.2
-50.7
-47.0
-46.0
-46.3
-45.3
-47.1
-45.0
-43.7
-44.9
-45.2
-43.2
N targets
5
9
13
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 20-m steps)
ambiguity peak [dB]
−10
−20
−30
−40
−50
−60

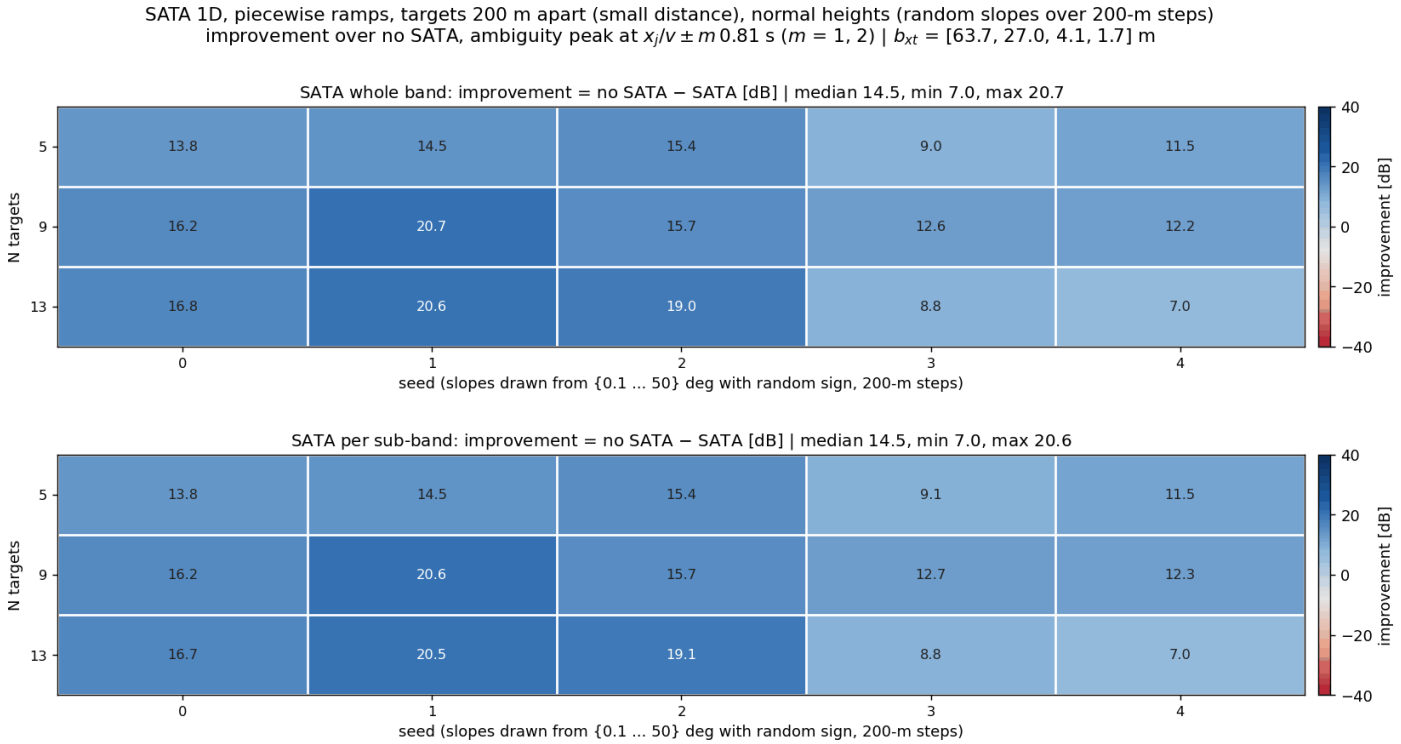

SATA 1D, piecewise ramps, targets 200 m apart (small distance), normal heights (random slopes over 200-m steps)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
SATA whole band: improvement = no SATA − SATA [dB] | median 14.5, min 7.0, max 20.7
N targets
5
9
13
13.8
14.5
15.4
9.0
11.5
16.2
20.7
15.7
12.6
12.2
16.8
20.6
19.0
8.8
7.0
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 200-m steps)
40
20
0
−20
−40
improvement [dB]
SATA per sub-band: improvement = no SATA − SATA [dB] | median 14.5, min 7.0, max 20.6
N targets
5
9
13
13.8
14.5
15.4
9.1
11.5
16.2
20.6
15.7
12.7
12.3
16.7
20.5
19.1
8.8
7.0
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 200-m steps)
40
20
0
−20
−40
improvement [dB]

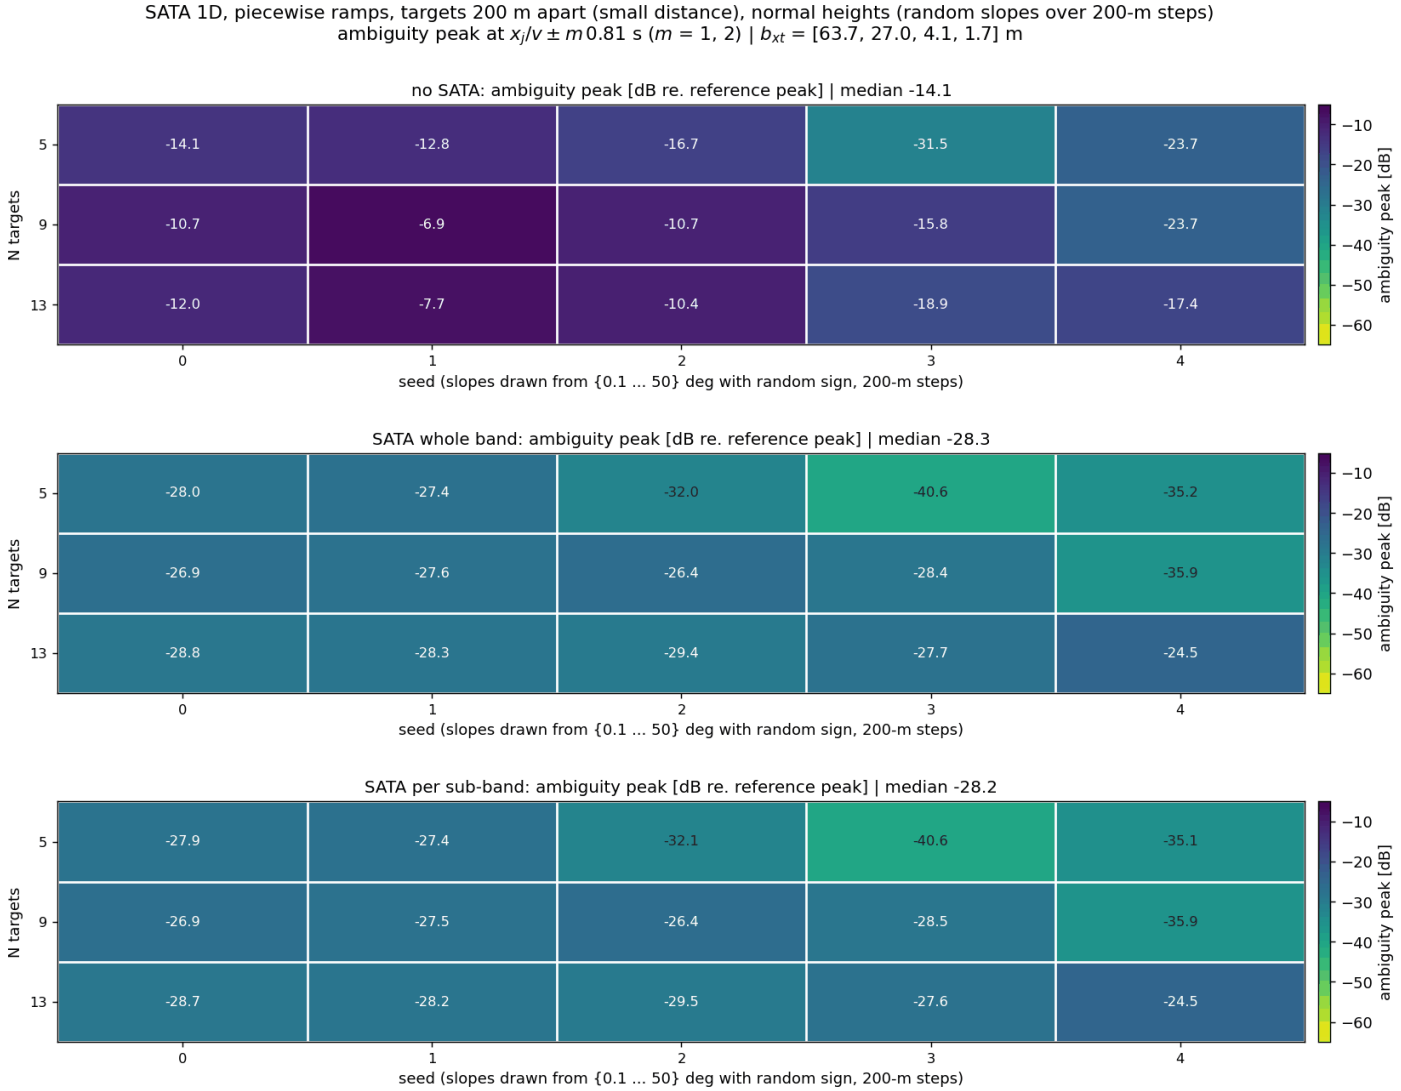

SATA 1D, piecewise ramps, targets 200 m apart (small distance), normal heights (random slopes over 200-m steps)
ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
no SATA: ambiguity peak [dB re. reference peak] | median -14.1
-14.1
-12.8
-16.7
-31.5
-23.7
-10.7
-6.9
-10.7
-15.8
-23.7
-12.0
-7.7
-10.4
-18.9
-17.4
N targets
5
9
13
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 200-m steps)
ambiguity peak [dB]
−10
−20
−30
−40
−50
−60
SATA whole band: ambiguity peak [dB re. reference peak] | median -28.3
-28.0
-27.4
-32.0
-40.6
-35.2
-26.9
-27.6
-26.4
-28.4
-35.9
-28.8
-28.3
-29.4
-27.7
-24.5
N targets
5
9
13
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 200-m steps)
ambiguity peak [dB]
−10
−20
−30
−40
−50
−60
SATA per sub-band: ambiguity peak [dB re. reference peak] | median -28.2
-27.9
-27.4
-32.1
-40.6
-35.1
-26.9
-27.5
-26.4
-28.5
-35.9
-28.7
-28.2
-29.5
-27.6
-24.5
N targets
5
9
13
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 200-m steps)
ambiguity peak [dB]
−10
−20
−30
−40
−50
−60

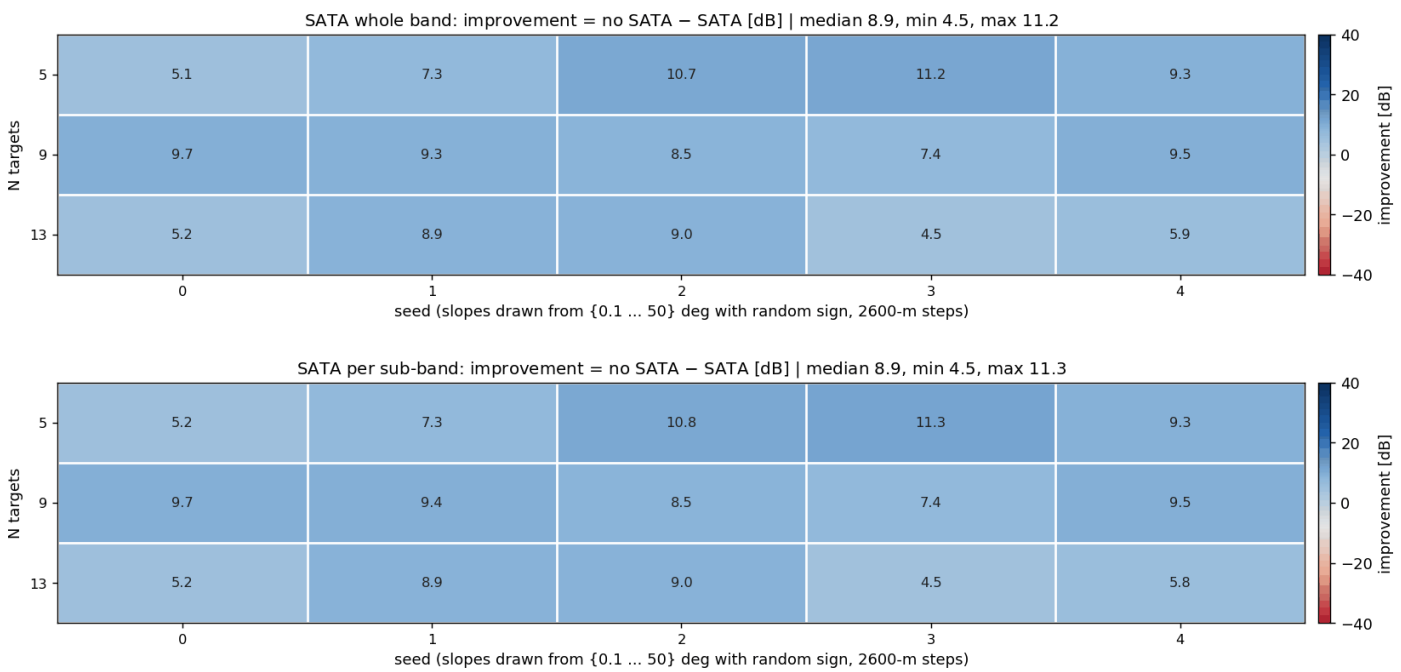

SATA 1D, piecewise ramps, targets 200 m apart (small distance), large heights (random slopes over 2600-m steps)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
SATA whole band: improvement = no SATA − SATA [dB] | median 8.9, min 4.5, max 11.2
N targets
5
9
13
5.1
7.3
10.7
11.2
9.3
9.7
9.3
8.5
7.4
9.5
5.2
8.9
9.0
4.5
5.9
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 2600-m steps)
40
20
0
−20
−40
improvement [dB]
SATA per sub-band: improvement = no SATA − SATA [dB] | median 8.9, min 4.5, max 11.3
N targets
5
9
13
5.2
7.3
10.8
11.3
9.3
9.7
9.4
8.5
7.4
9.5
5.2
8.9
9.0
4.5
5.8
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 2600-m steps)
40
20
0
−20
−40
improvement [dB]

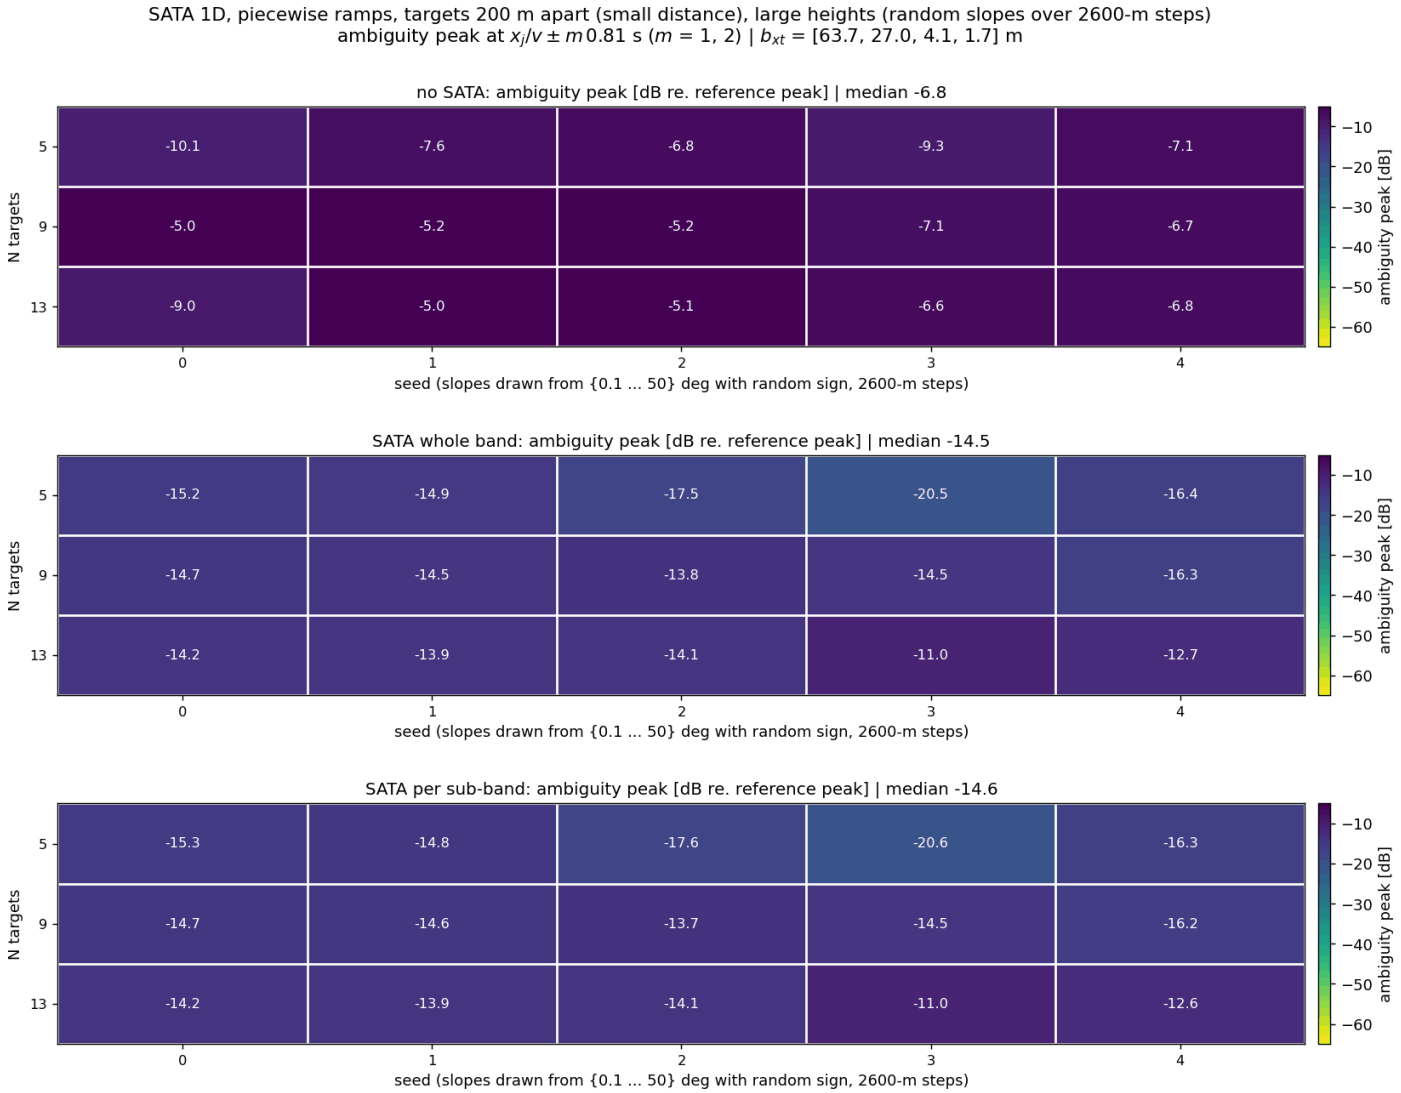

SATA 1D, piecewise ramps, targets 200 m apart (small distance), large heights (random slopes over 2600-m steps)
ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
no SATA: ambiguity peak [dB re. reference peak] | median -6.8
-10.1
-7.6
-6.8
-9.3
-7.1
-5.0
-5.2
-5.2
-7.1
-6.7
-9.0
-5.0
-5.1
-6.6
-6.8
N targets
5
9
13
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 2600-m steps)
ambiguity peak [dB]
−10
−20
−30
−40
−50
−60
SATA whole band: ambiguity peak [dB re. reference peak] | median -14.5
-15.2
-14.9
-17.5
-20.5
-16.4
-14.7
-14.5
-13.8
-14.5
-16.3
-14.2
-13.9
-14.1
-11.0
-12.7
N targets
5
9
13
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 2600-m steps)
ambiguity peak [dB]
−10
−20
−30
−40
−50
−60
SATA per sub-band: ambiguity peak [dB re. reference peak] | median -14.6
-15.3
-14.8
-17.6
-20.6
-16.3
-14.7
-14.6
-13.7
-14.5
-16.2
-14.2
-13.9
-14.1
-11.0
-12.6
N targets
5
9
13
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 2600-m steps)
ambiguity peak [dB]
−10
−20
−30
−40
−50
−60

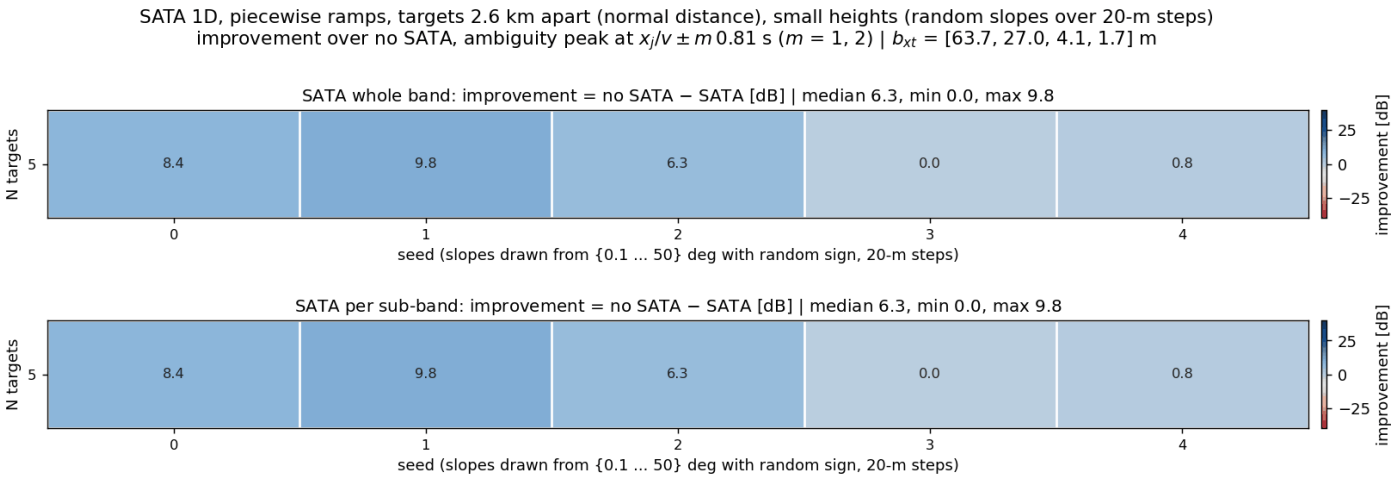

SATA 1D, piecewise ramps, targets 2.6 km apart (normal distance), small heights (random slopes over 20-m steps)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
SATA whole band: improvement = no SATA − SATA [dB] | median 6.3, min 0.0, max 9.8
N targets
5
8.4
9.8
6.3
0.0
0.8
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 20-m steps)
25
0
−25
improvement [dB]
SATA per sub-band: improvement = no SATA − SATA [dB] | median 6.3, min 0.0, max 9.8
N targets
5
8.4
9.8
6.3
0.0
0.8
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 20-m steps)
25
0
−25
improvement [dB]

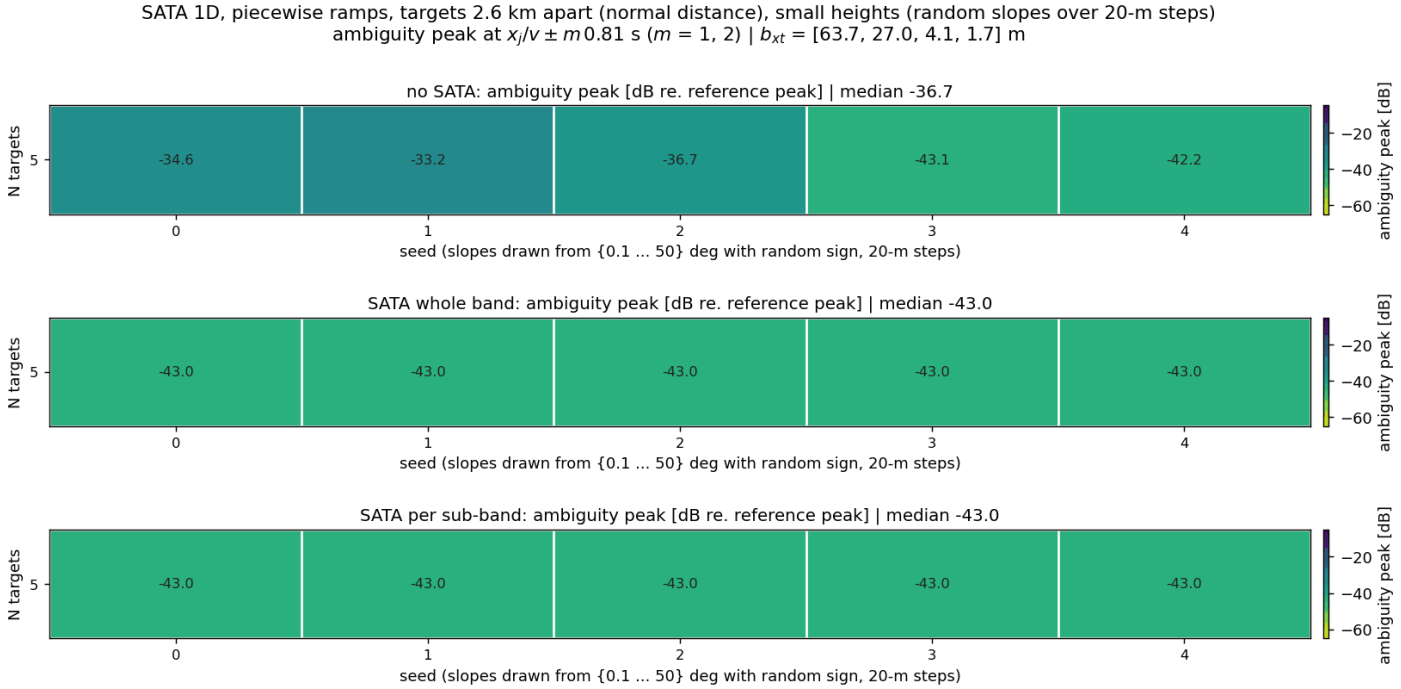

SATA 1D, piecewise ramps, targets 2.6 km apart (normal distance), small heights (random slopes over 20-m steps)
ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
no SATA: ambiguity peak [dB re. reference peak] | median -36.7
-34.6
-33.2
-36.7
-43.1
-42.2
SATA whole band: ambiguity peak [dB re. reference peak] | median -43.0
-43.0
-43.0
-43.0
-43.0
-43.0
SATA per sub-band: ambiguity peak [dB re. reference peak] | median -43.0
-43.0
-43.0
-43.0
-43.0
-43.0
N targets
5
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 20-m steps)
ambiguity peak [dB]
−20
−40
−60

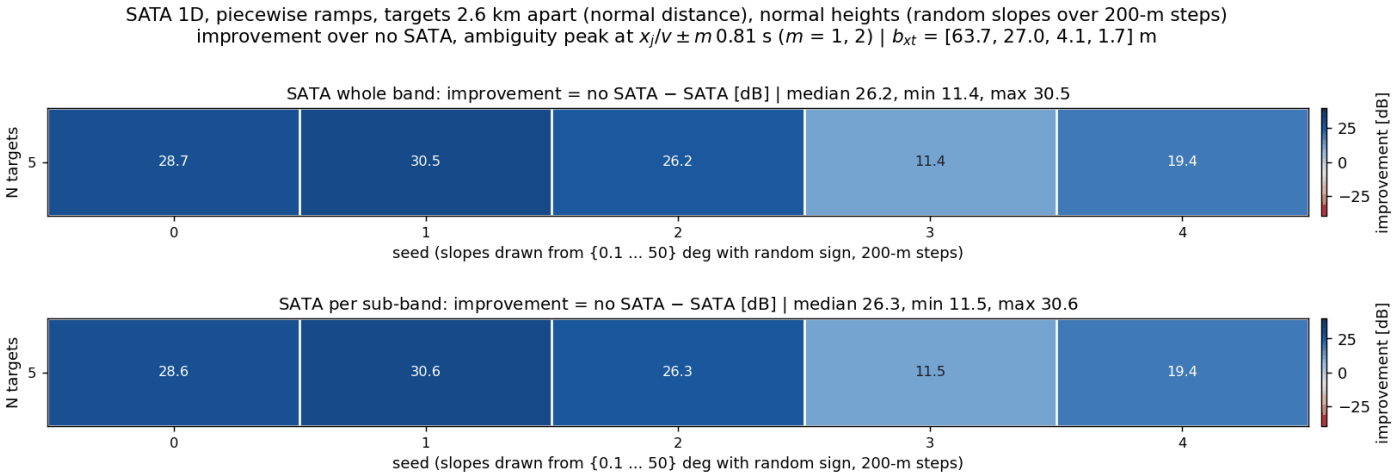

SATA 1D, piecewise ramps, targets 2.6 km apart (normal distance), normal heights (random slopes over 200-m steps)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
SATA whole band: improvement = no SATA − SATA [dB] | median 26.2, min 11.4, max 30.5
N targets
5
28.7
30.5
26.2
11.4
19.4
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 200-m steps)
25
0
−25
improvement [dB]
SATA per sub-band: improvement = no SATA − SATA [dB] | median 26.3, min 11.5, max 30.6
N targets
5
28.6
30.6
26.3
11.5
19.4
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 200-m steps)
25
0
−25
improvement [dB]

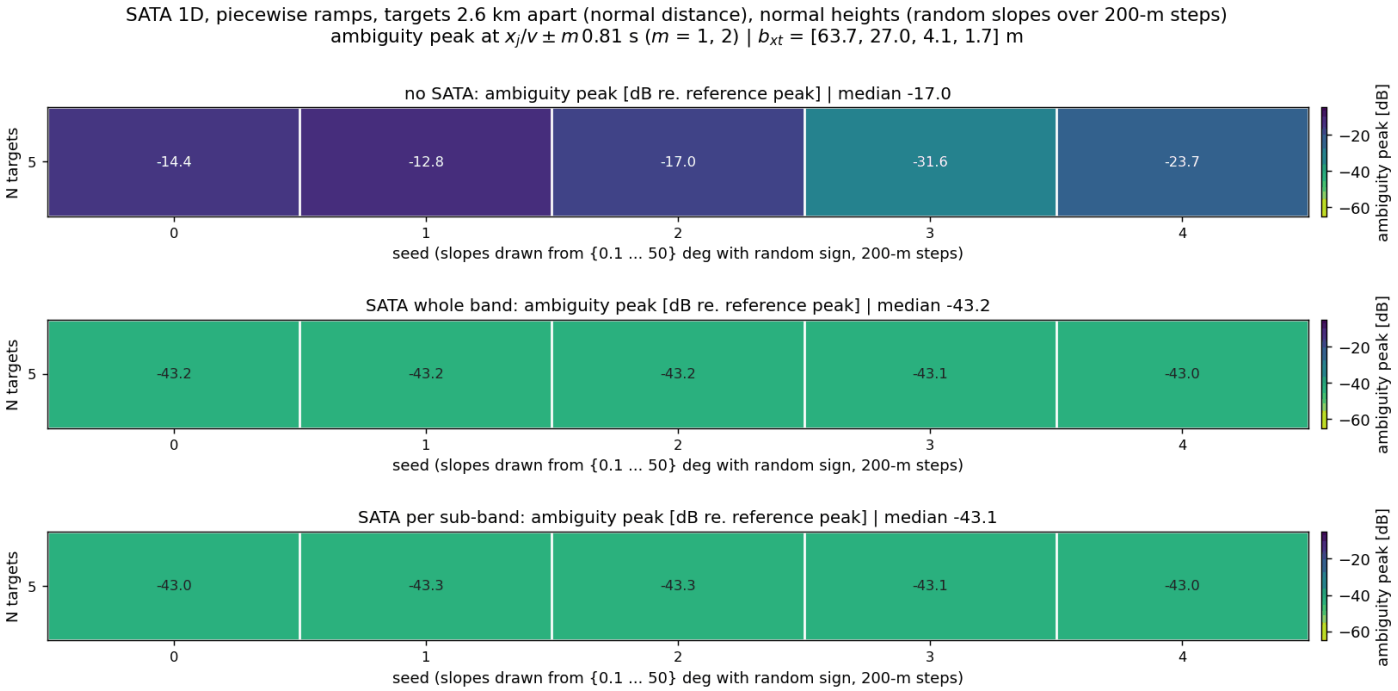

SATA 1D, piecewise ramps, targets 2.6 km apart (normal distance), normal heights (random slopes over 200-m steps)
ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
no SATA: ambiguity peak [dB re. reference peak] | median -17.0
N targets
5
-14.4
-12.8
-17.0
-31.6
-23.7
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 200-m steps)
ambiguity peak [dB]
−20
−40
−60
SATA whole band: ambiguity peak [dB re. reference peak] | median -43.2
N targets
5
-43.2
-43.2
-43.2
-43.1
-43.0
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 200-m steps)
ambiguity peak [dB]
−20
−40
−60
SATA per sub-band: ambiguity peak [dB re. reference peak] | median -43.1
N targets
5
-43.0
-43.3
-43.3
-43.1
-43.0
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 200-m steps)
ambiguity peak [dB]
−20
−40
−60

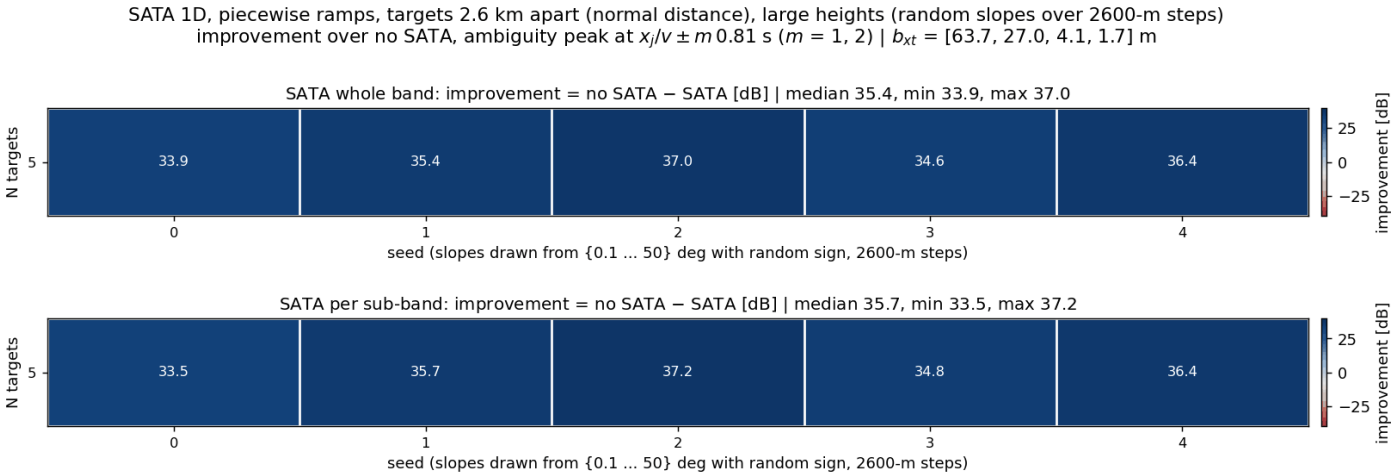

SATA 1D, piecewise ramps, targets 2.6 km apart (normal distance), large heights (random slopes over 2600-m steps)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
SATA whole band: improvement = no SATA − SATA [dB] | median 35.4, min 33.9, max 37.0
N targets
5
33.9
35.4
37.0
34.6
36.4
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 2600-m steps)
25
0
−25
improvement [dB]
SATA per sub-band: improvement = no SATA − SATA [dB] | median 35.7, min 33.5, max 37.2
N targets
5
33.5
35.7
37.2
34.8
36.4
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 2600-m steps)
25
0
−25
improvement [dB]

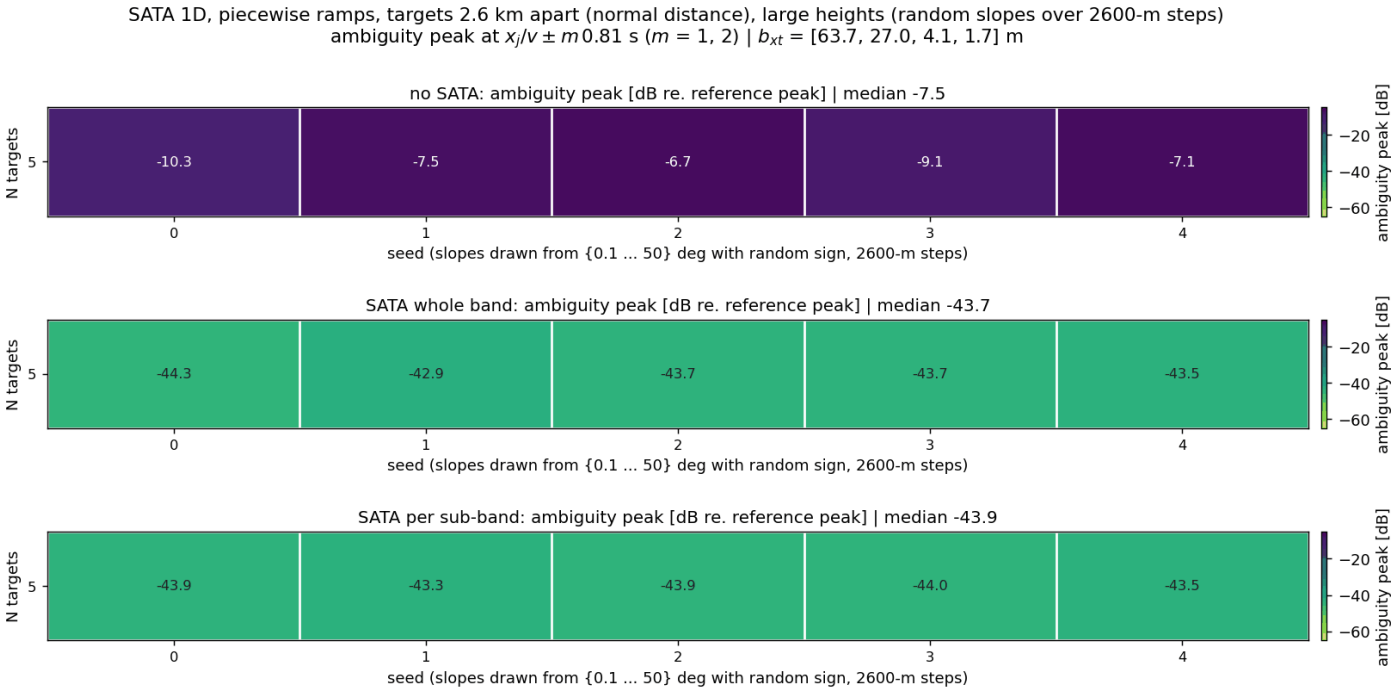

SATA 1D, piecewise ramps, targets 2.6 km apart (normal distance), large heights (random slopes over 2600-m steps)
ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
no SATA: ambiguity peak [dB re. reference peak] | median -7.5
-10.3
-7.5
-6.7
-9.1
-7.1
SATA whole band: ambiguity peak [dB re. reference peak] | median -43.7
-44.3
-42.9
-43.7
-43.7
-43.5
SATA per sub-band: ambiguity peak [dB re. reference peak] | median -43.9
-43.9
-43.3
-43.9
-44.0
-43.5
N targets
5
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 2600-m steps)
ambiguity peak [dB]
−20
−40
−60

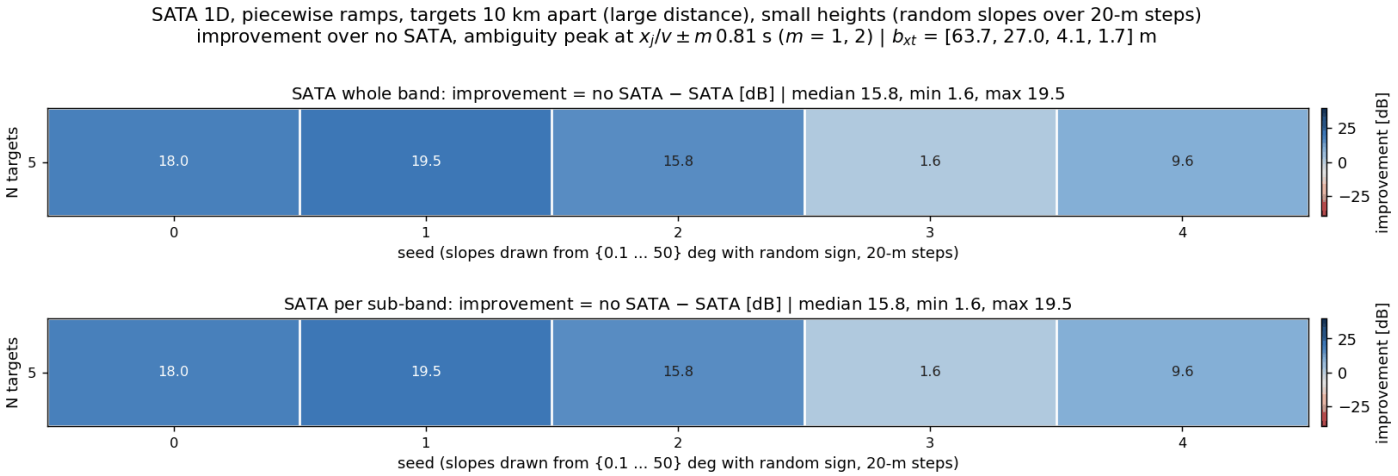

SATA 1D, piecewise ramps, targets 10 km apart (large distance), small heights (random slopes over 20-m steps)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
SATA whole band: improvement = no SATA − SATA [dB] | median 15.8, min 1.6, max 19.5
N targets
5
18.0
19.5
15.8
1.6
9.6
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 20-m steps)
improvement [dB]
25
0
−25
SATA per sub-band: improvement = no SATA − SATA [dB] | median 15.8, min 1.6, max 19.5
N targets
5
18.0
19.5
15.8
1.6
9.6
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 20-m steps)
improvement [dB]
25
0
−25

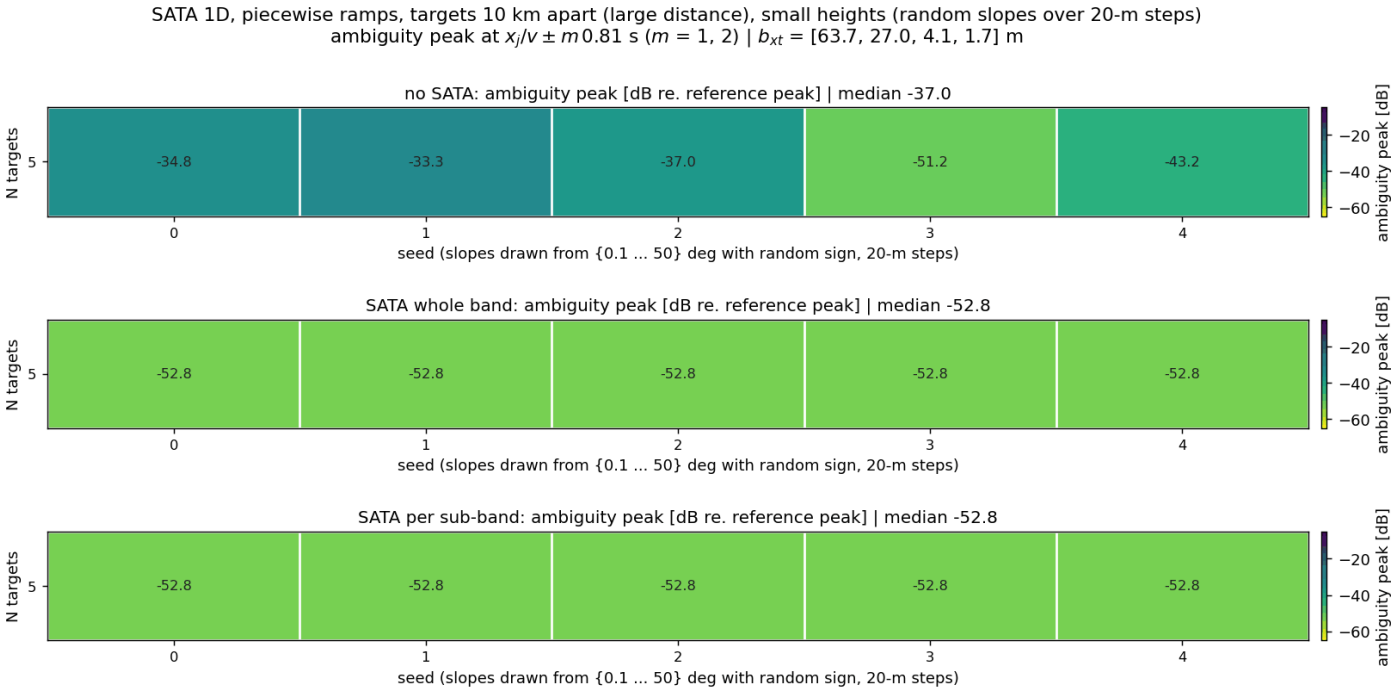
SATA 1D, piecewise ramps, targets 10 km apart (large distance), small heights (random slopes over 20-m steps)
ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
no SATA: ambiguity peak [dB re. reference peak] | median -37.0
N targets
5
-34.8
-33.3
-37.0
-51.2
-43.2
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 20-m steps)
ambiguity peak [dB]
−20
−40
−60
SATA whole band: ambiguity peak [dB re. reference peak] | median -52.8
N targets
5
-52.8
-52.8
-52.8
-52.8
-52.8
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 20-m steps)
ambiguity peak [dB]
−20
−40
−60
SATA per sub-band: ambiguity peak [dB re. reference peak] | median -52.8
N targets
5
-52.8
-52.8
-52.8
-52.8
-52.8
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 20-m steps)
ambiguity peak [dB]
−20
−40
−60

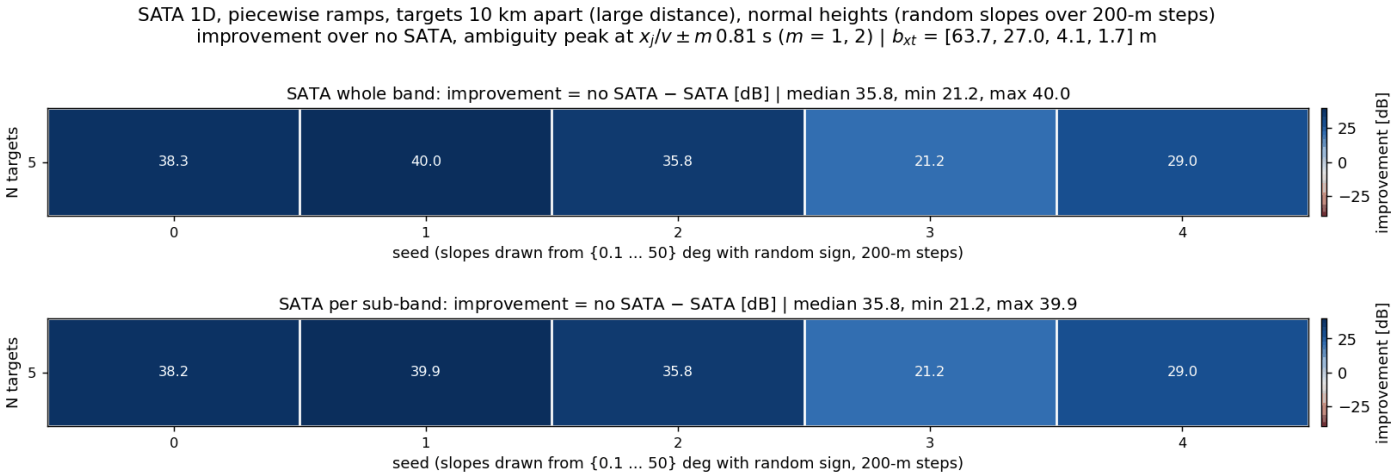
SATA 1D, piecewise ramps, targets 10 km apart (large distance), normal heights (random slopes over 200-m steps)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
SATA whole band: improvement = no SATA − SATA [dB] | median 35.8, min 21.2, max 40.0
N targets
5
38.3
40.0
35.8
21.2
29.0
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 200-m steps)
25
0
−25
improvement [dB]
SATA per sub-band: improvement = no SATA − SATA [dB] | median 35.8, min 21.2, max 39.9
N targets
5
38.2
39.9
35.8
21.2
29.0
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 200-m steps)
25
0
−25
improvement [dB]

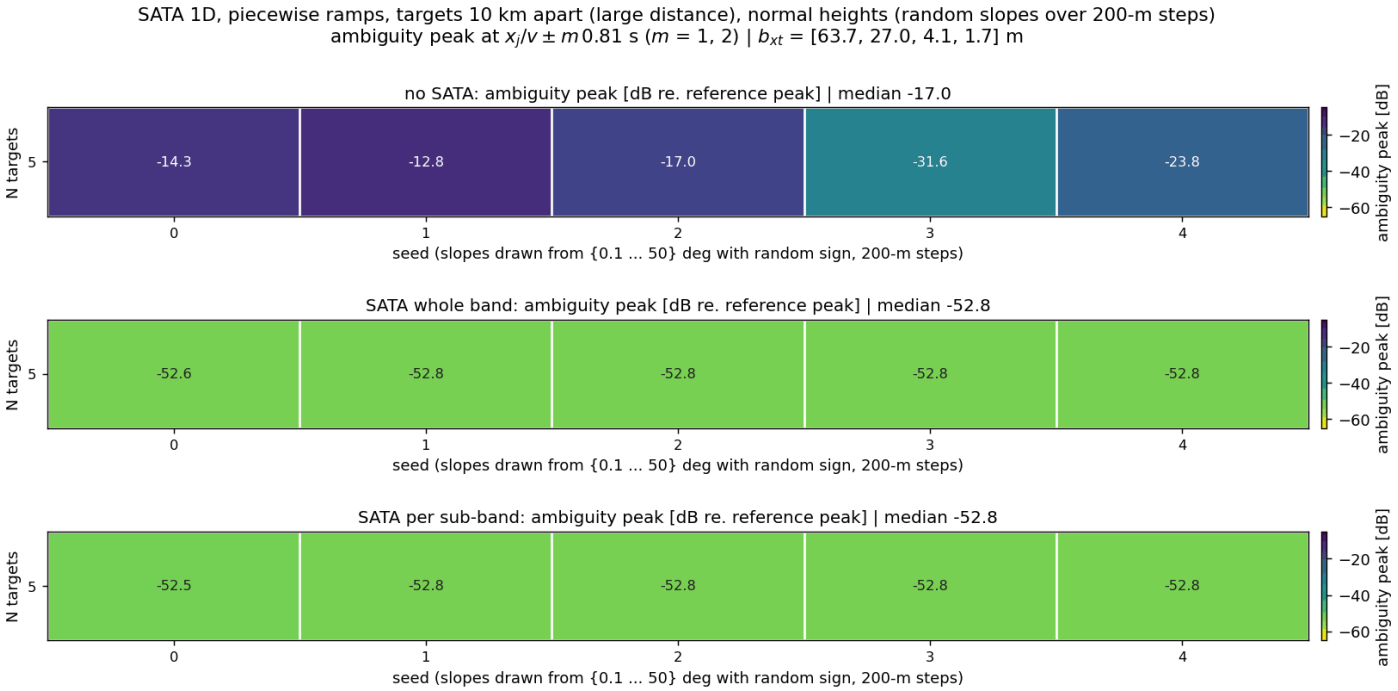

SATA 1D, piecewise ramps, targets 10 km apart (large distance), normal heights (random slopes over 200-m steps)
ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
no SATA: ambiguity peak [dB re. reference peak] | median -17.0
-14.3
-12.8
-17.0
-31.6
-23.8
SATA whole band: ambiguity peak [dB re. reference peak] | median -52.8
-52.6
-52.8
-52.8
-52.8
-52.8
SATA per sub-band: ambiguity peak [dB re. reference peak] | median -52.8
-52.5
-52.8
-52.8
-52.8
-52.8
N targets
5
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 200-m steps)
ambiguity peak [dB]
−20
−40
−60

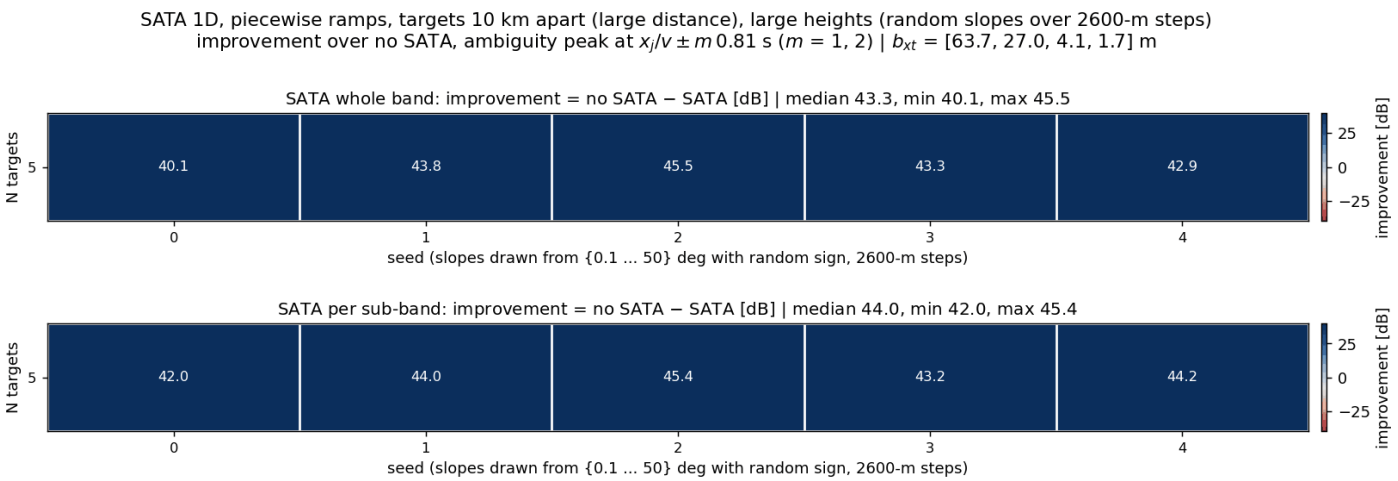

SATA 1D, piecewise ramps, targets 10 km apart (large distance), large heights (random slopes over 2600-m steps)
improvement over no SATA, ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
SATA whole band: improvement = no SATA − SATA [dB] | median 43.3, min 40.1, max 45.5
N targets
5
40.1
43.8
45.5
43.3
42.9
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 2600-m steps)
25
0
−25
improvement [dB]
SATA per sub-band: improvement = no SATA − SATA [dB] | median 44.0, min 42.0, max 45.4
N targets
5
42.0
44.0
45.4
43.2
44.2
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 2600-m steps)
25
0
−25
improvement [dB]

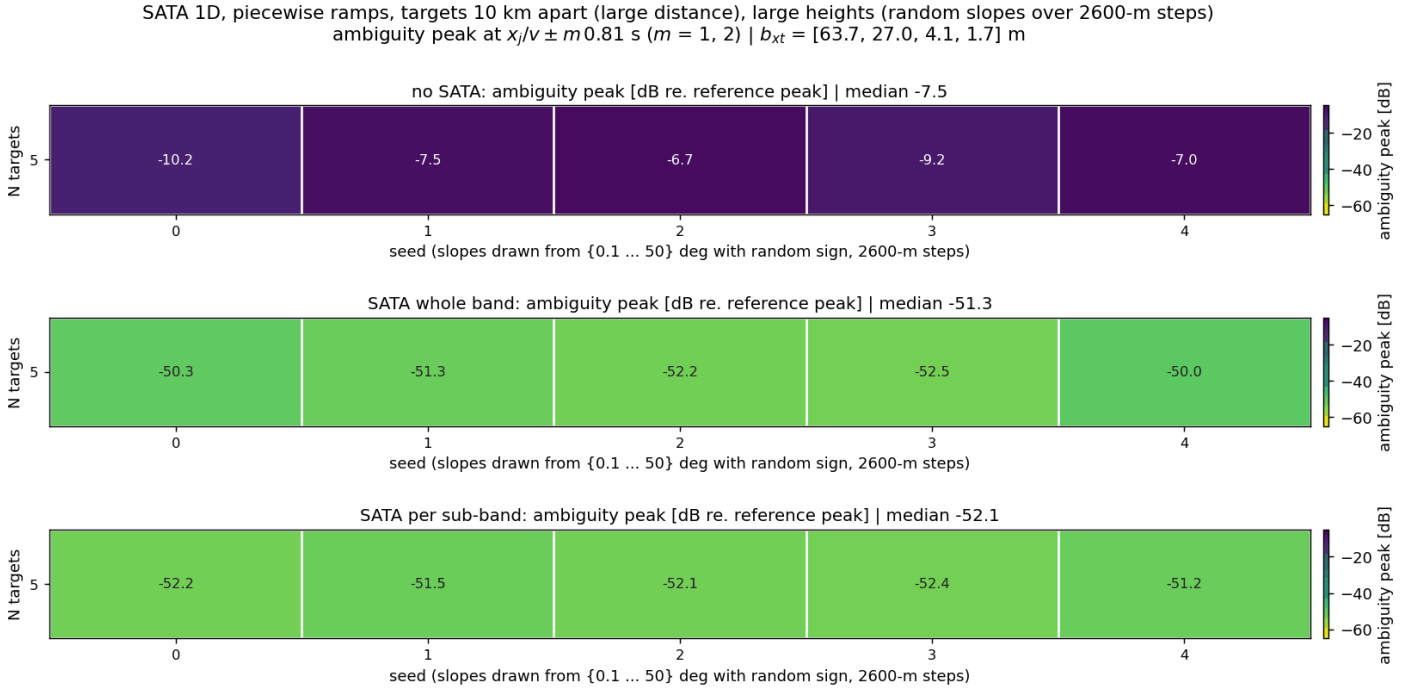

SATA 1D, piecewise ramps, targets 10 km apart (large distance), large heights (random slopes over 2600-m steps)
ambiguity peak at $x_j/v \pm m\,0.81$ s (m = 1, 2) | b_{xt} = [63.7, 27.0, 4.1, 1.7] m
no SATA: ambiguity peak [dB re. reference peak] | median -7.5
-10.2
-7.5
-6.7
-9.2
-7.0
SATA whole band: ambiguity peak [dB re. reference peak] | median -51.3
-50.3
-51.3
-52.2
-52.5
-50.0
SATA per sub-band: ambiguity peak [dB re. reference peak] | median -52.1
-52.2
-51.5
-52.1
-52.4
-51.2
N targets
5
0
1
2
3
4
seed (slopes drawn from {0.1 ... 50} deg with random sign, 2600-m steps)
ambiguity peak [dB]
−20
−40
−60


RH-SS-001 | SATA 1D | random heights: N = 5, heights $\sim U(0, 10)$ m, seed 0, targets 200 m apart (small distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

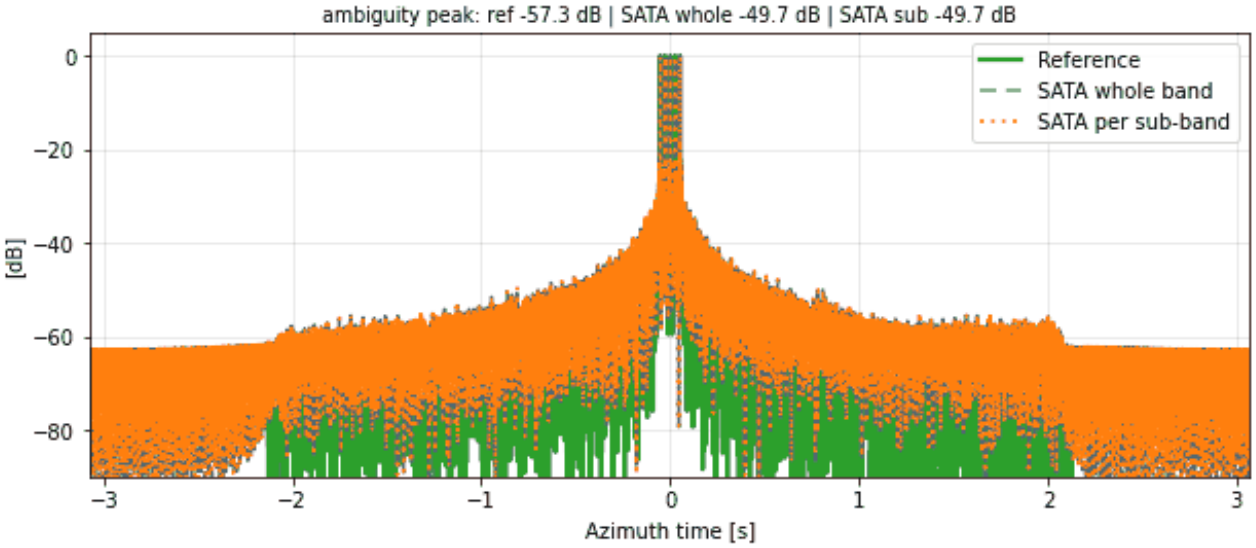

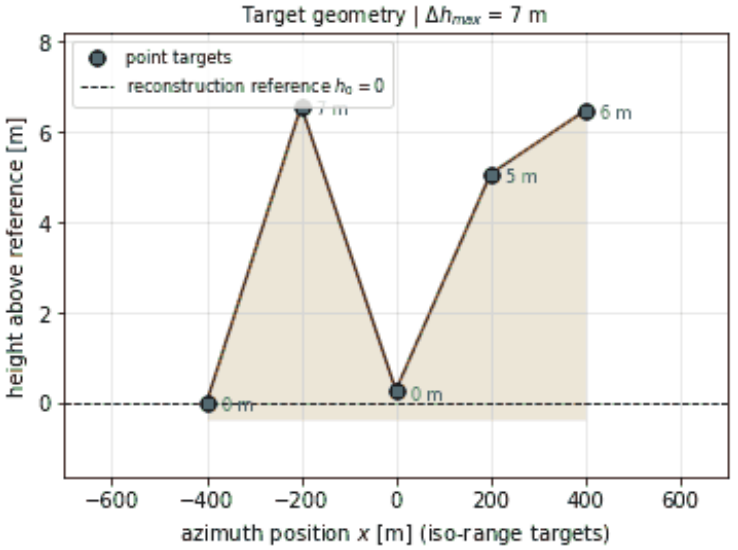


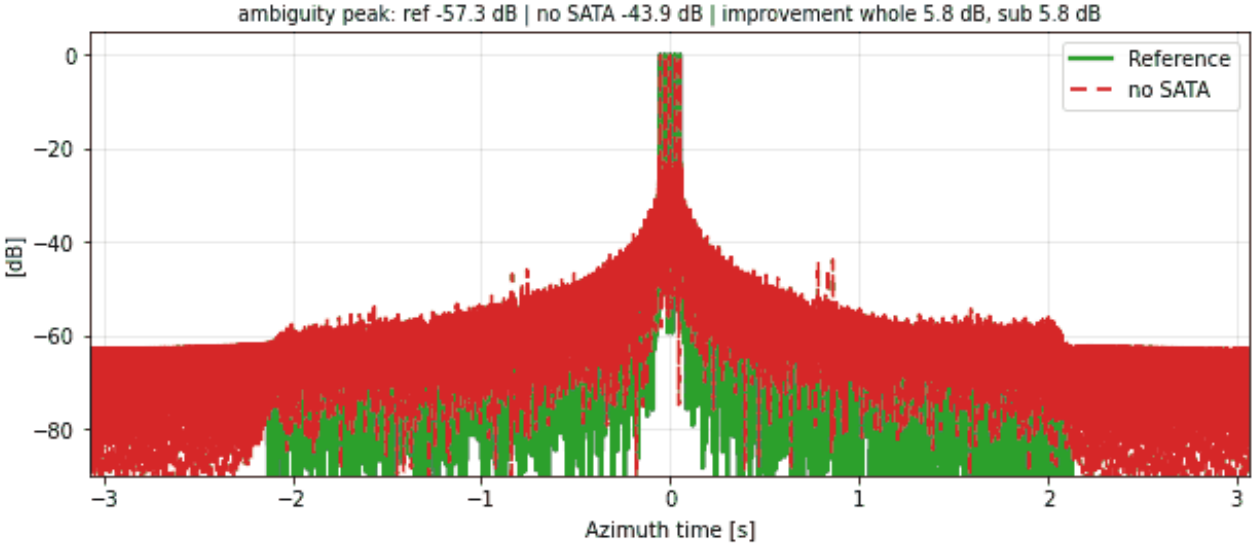


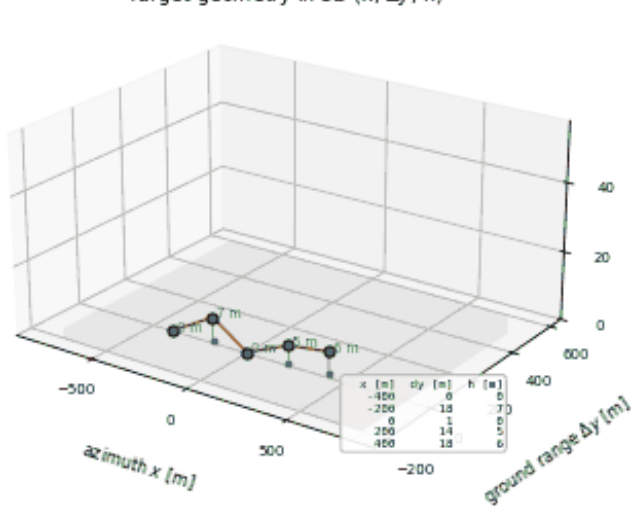



RH-SS-002 | SATA 1D | random heights: N = 5, heights $\sim U(0, 10)$ m, seed 1, targets 200 m apart (small distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

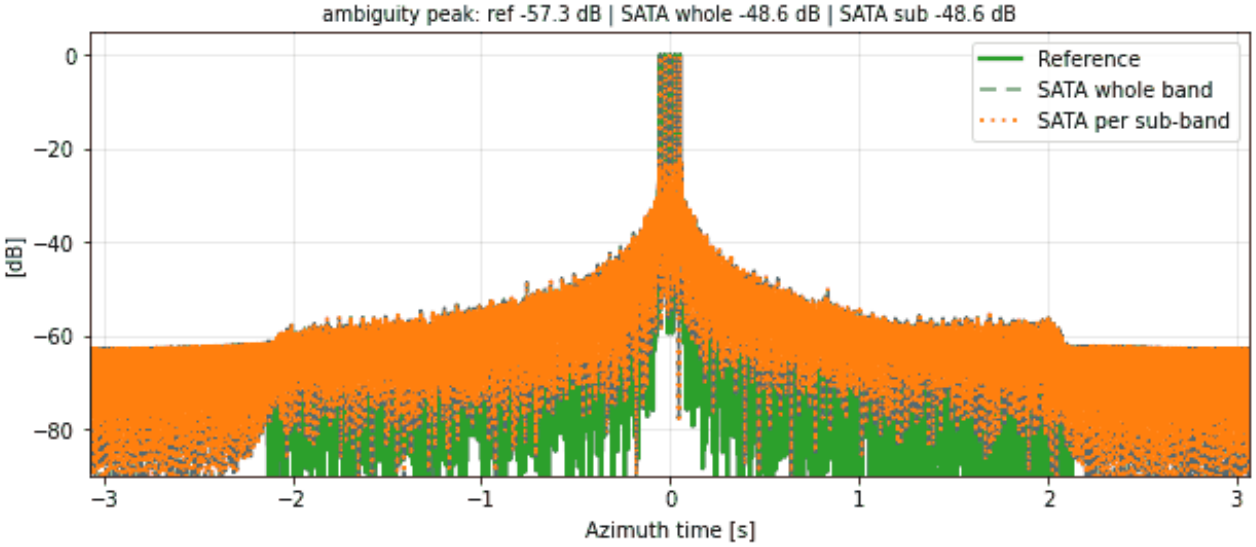

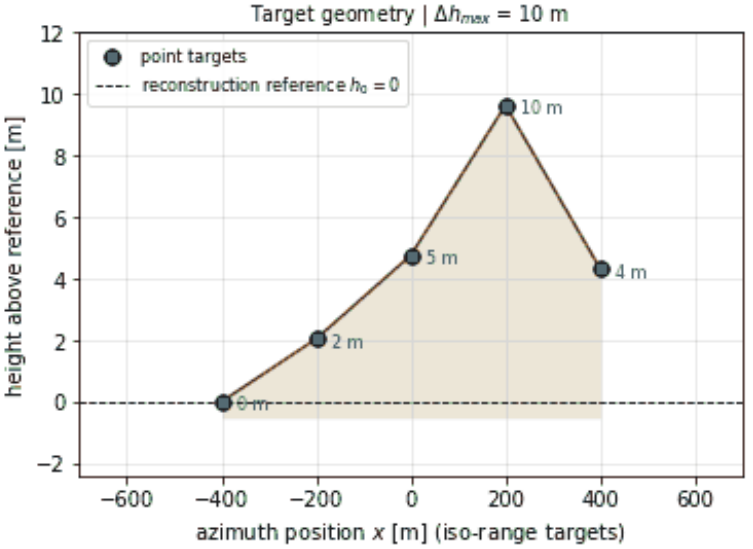


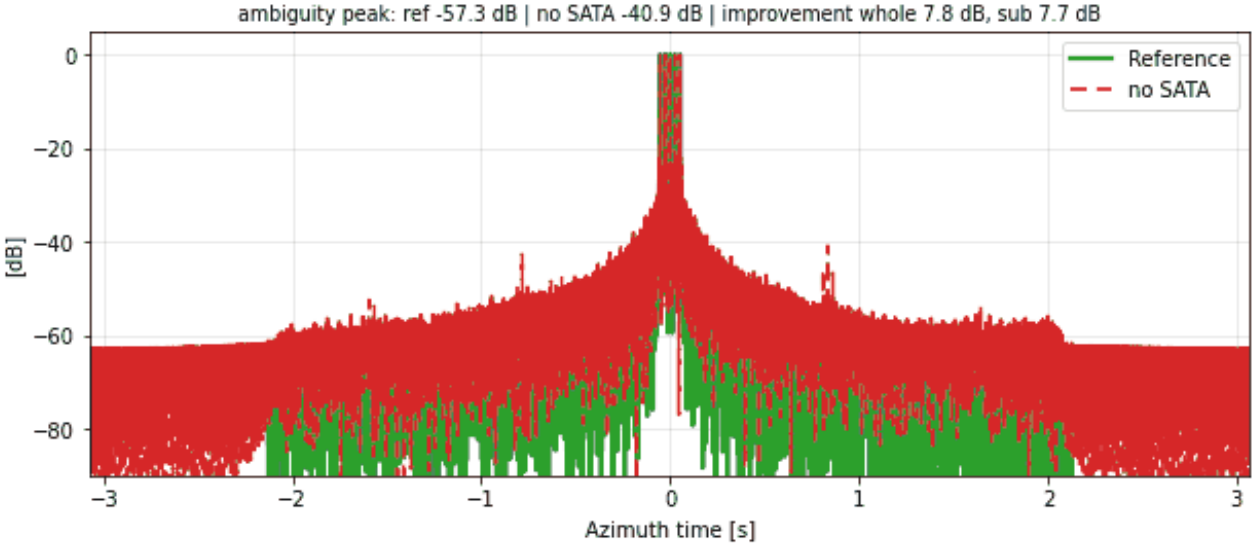


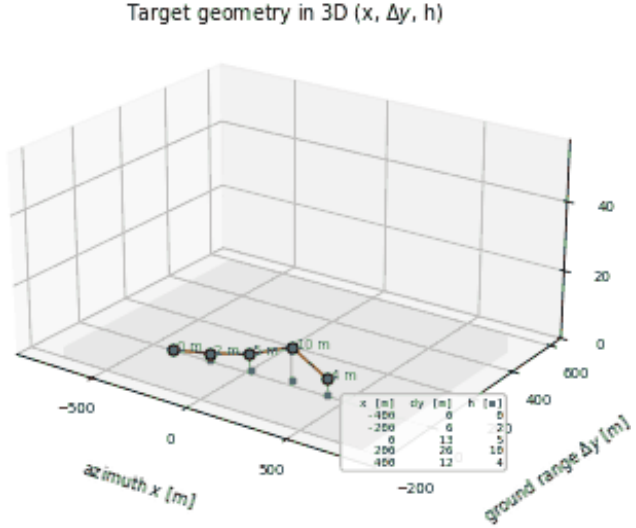



RH-SS-003 | SATA 1D | random heights: N = 5, heights $\sim U(0, 50)$ m, seed 0, targets 200 m apart (small distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

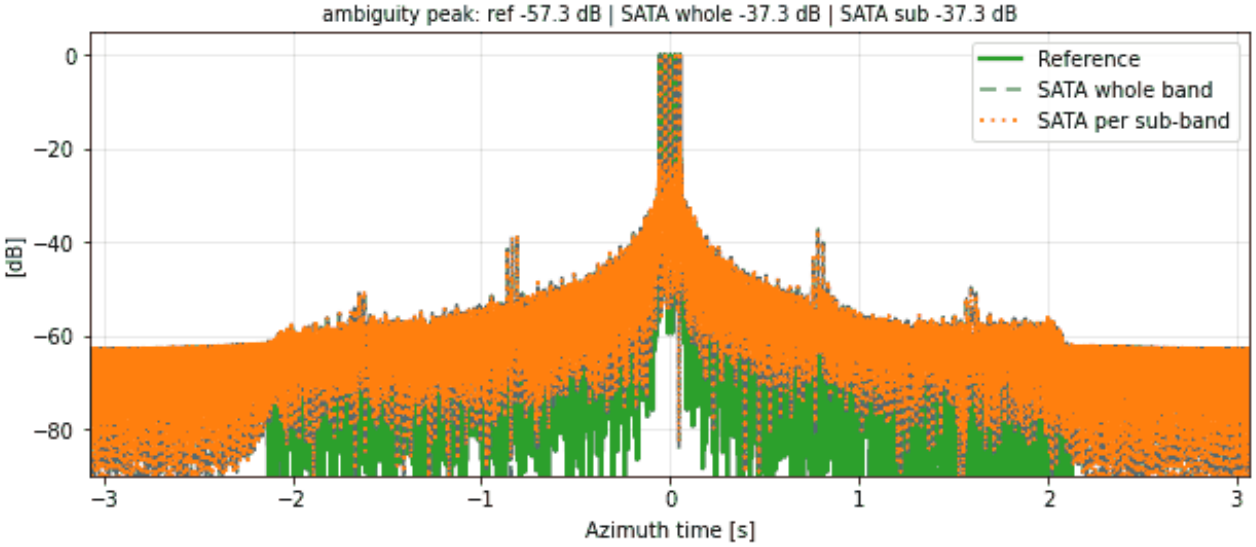

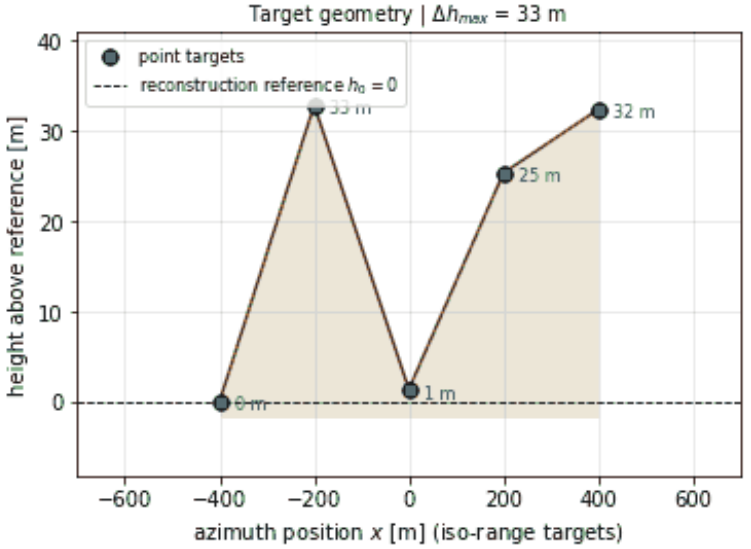


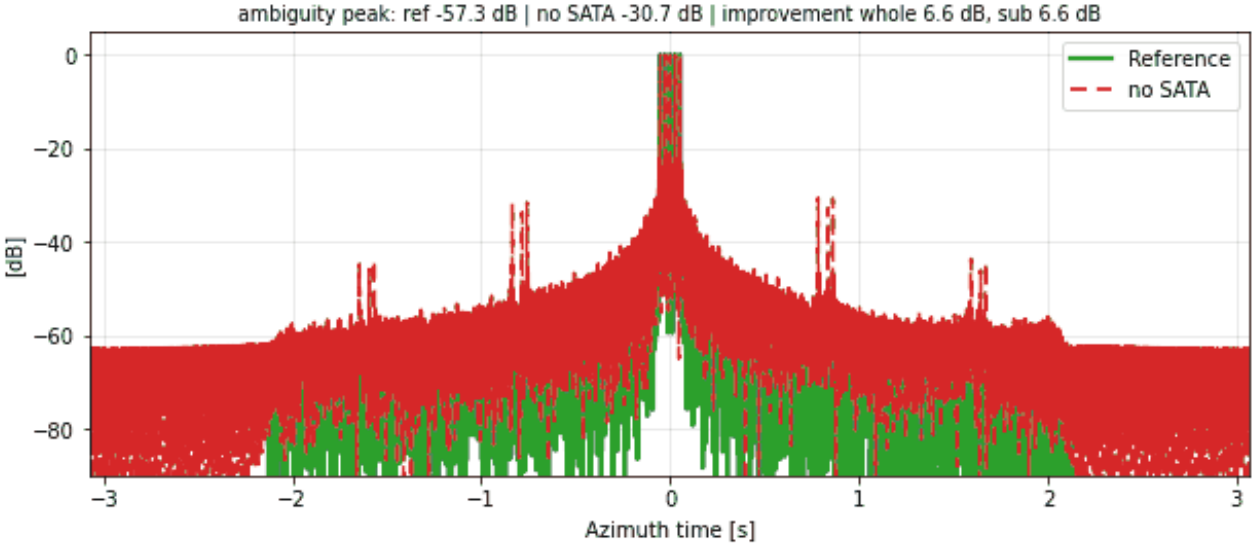


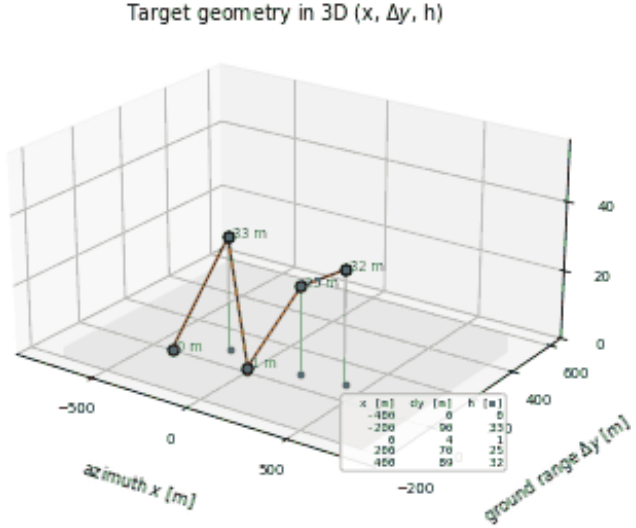



RH-SS-004 | SATA 1D | random heights: N = 5, heights $\sim U(0, 50)$ m, seed 1, targets 200 m apart (small distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

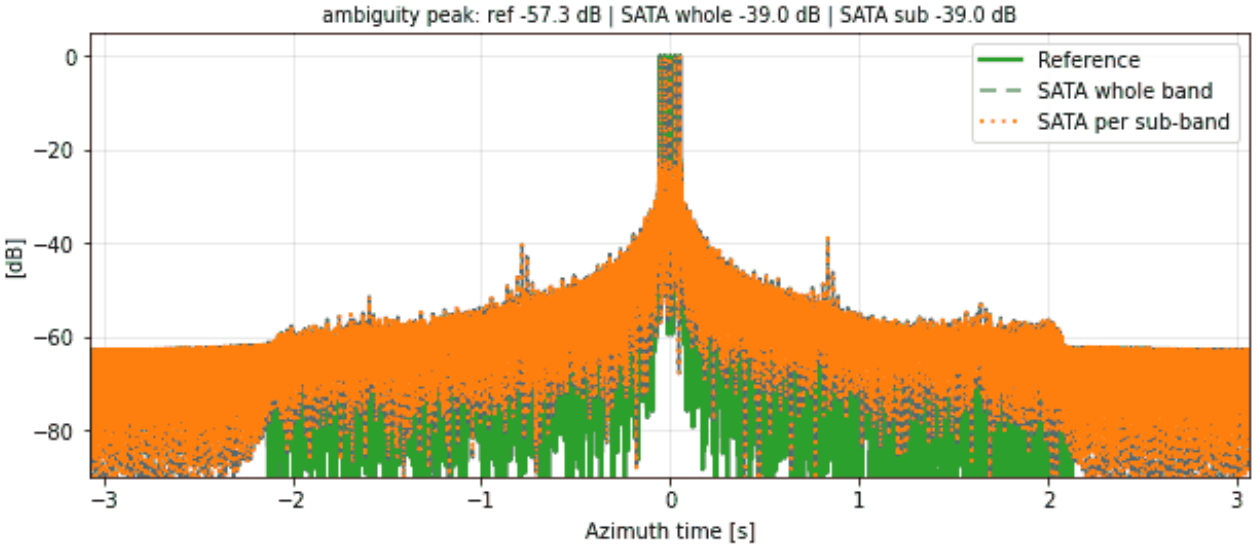

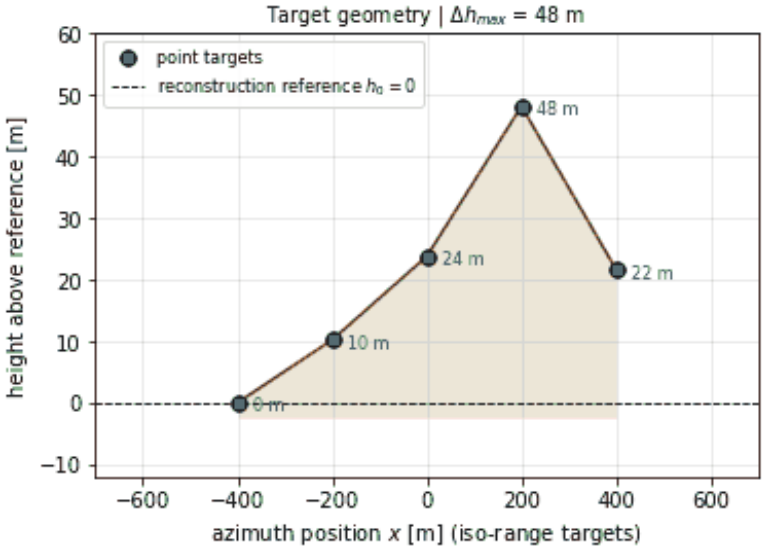


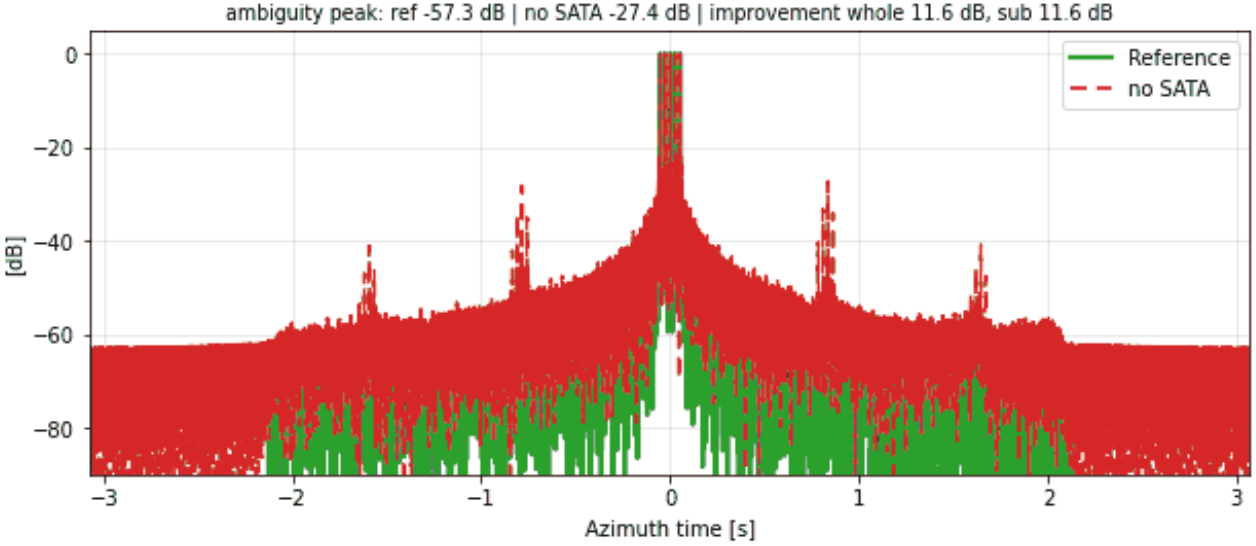


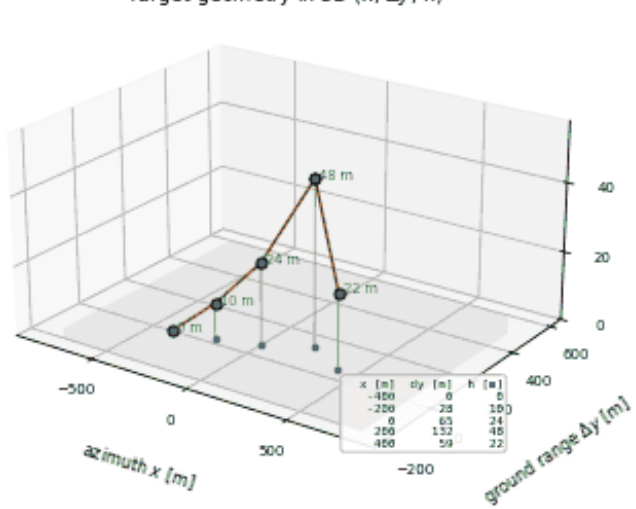



RH-SS-005 | SATA 1D | random heights: N = 5, heights $\sim U(0, 100)$ m, seed 0, targets 200 m apart (small distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

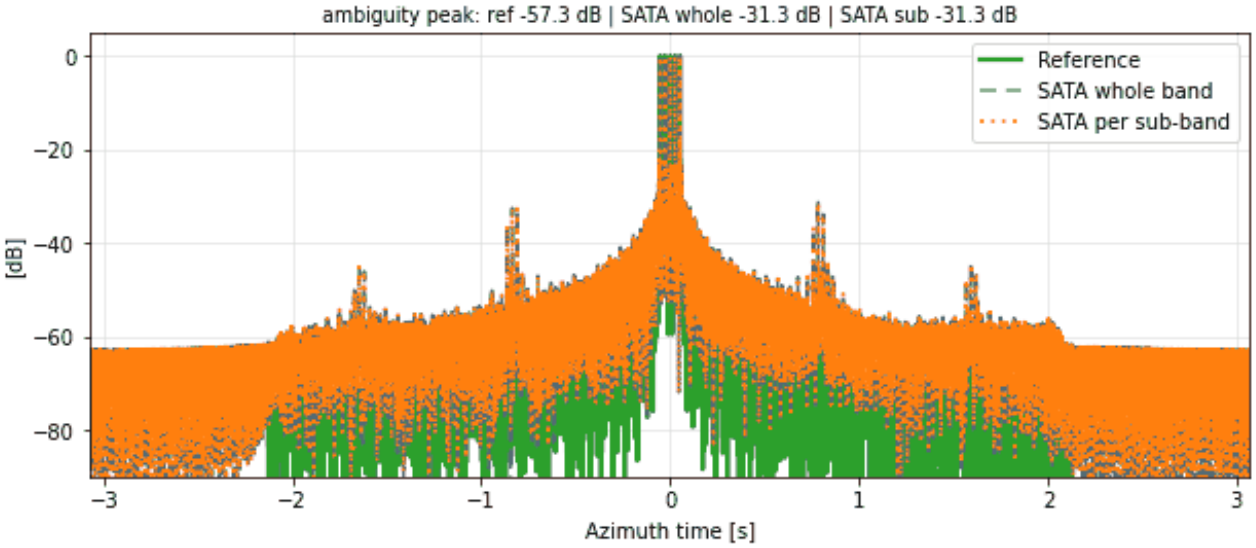

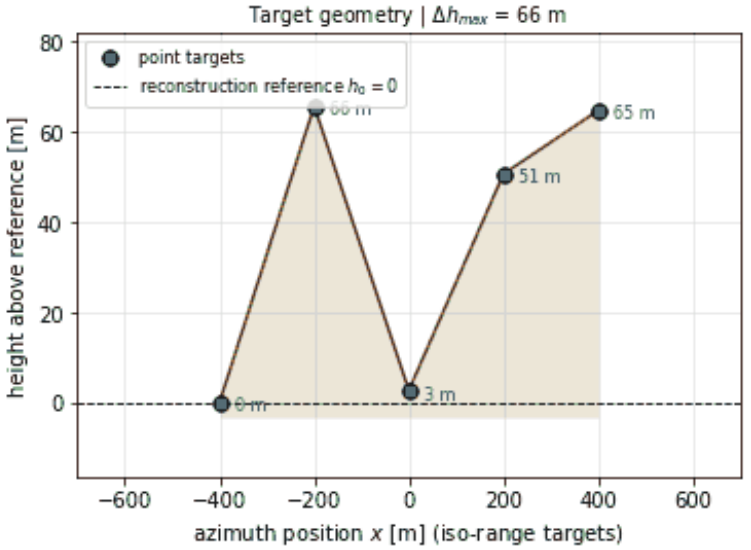


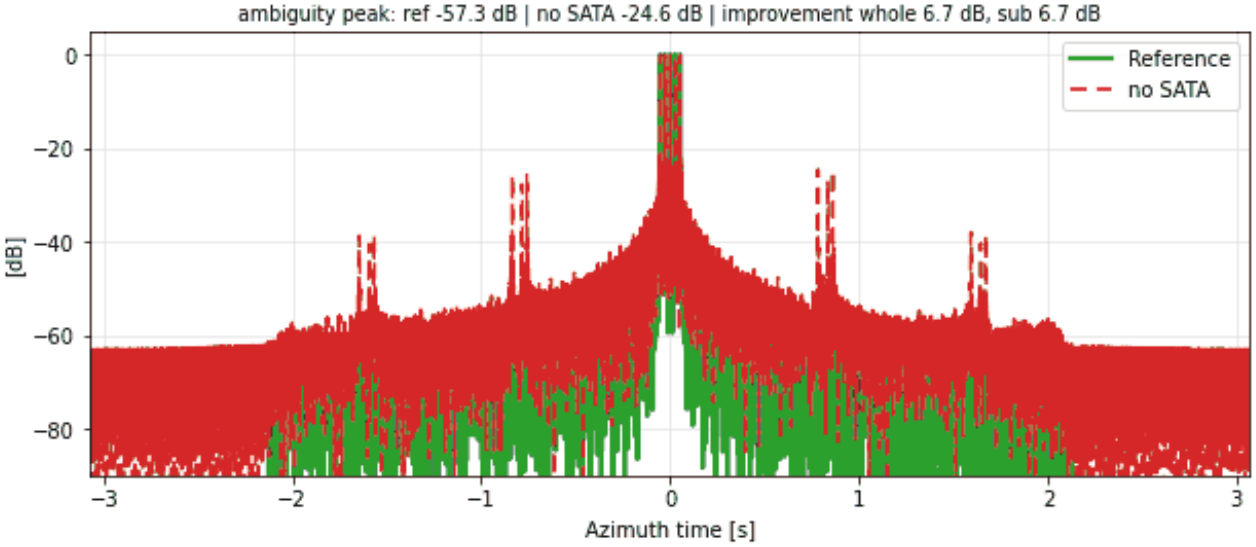


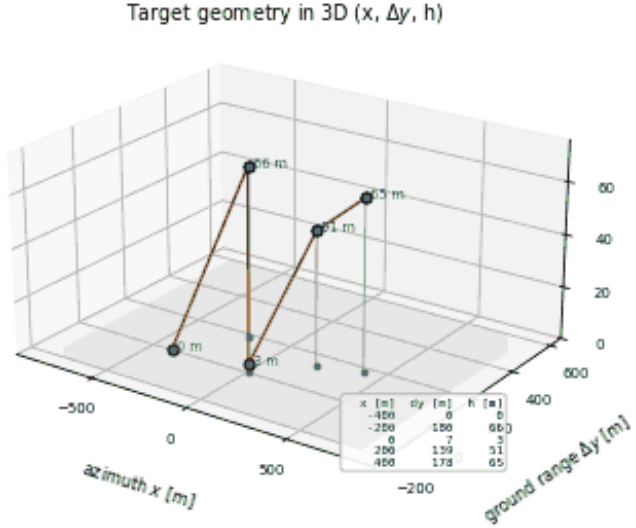



RH-SS-006 | SATA 1D | random heights: N = 5, heights $\sim U(0, 100)$ m, seed 1, targets 200 m apart (small distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

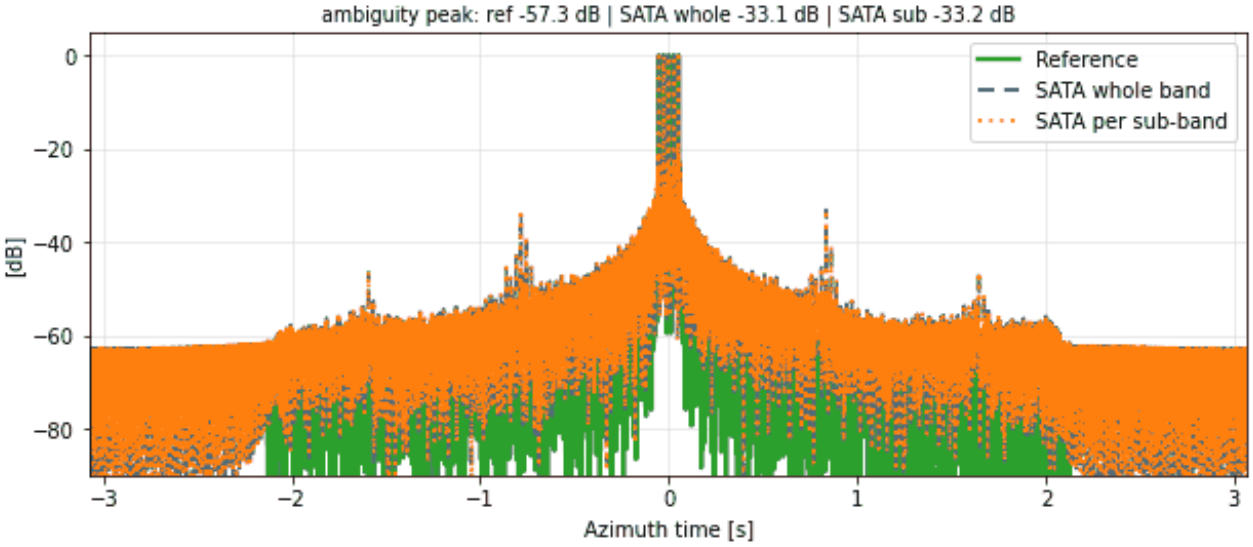


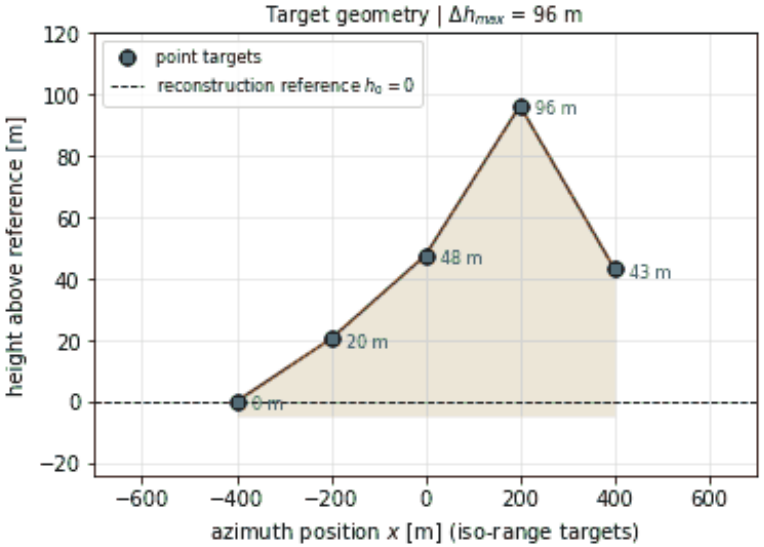


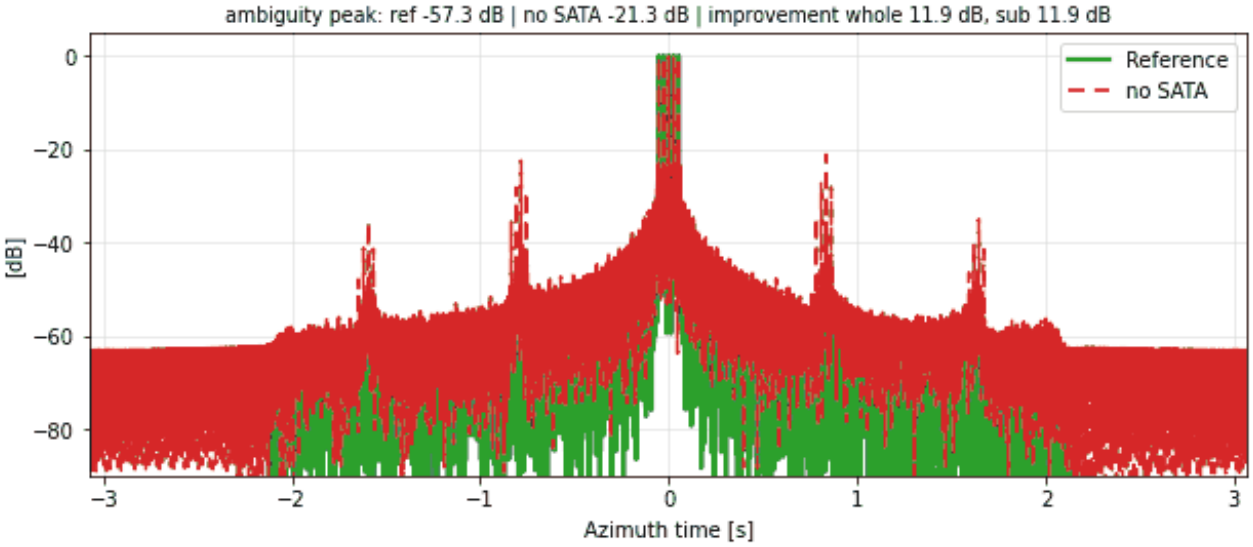

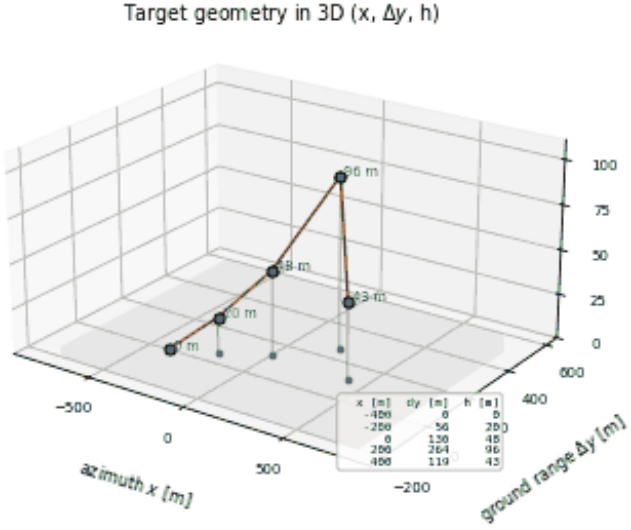


RH-SS-007 | SATA 1D | random heights: N = 9, heights $\sim U(0, 10)$ m, seed 0, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

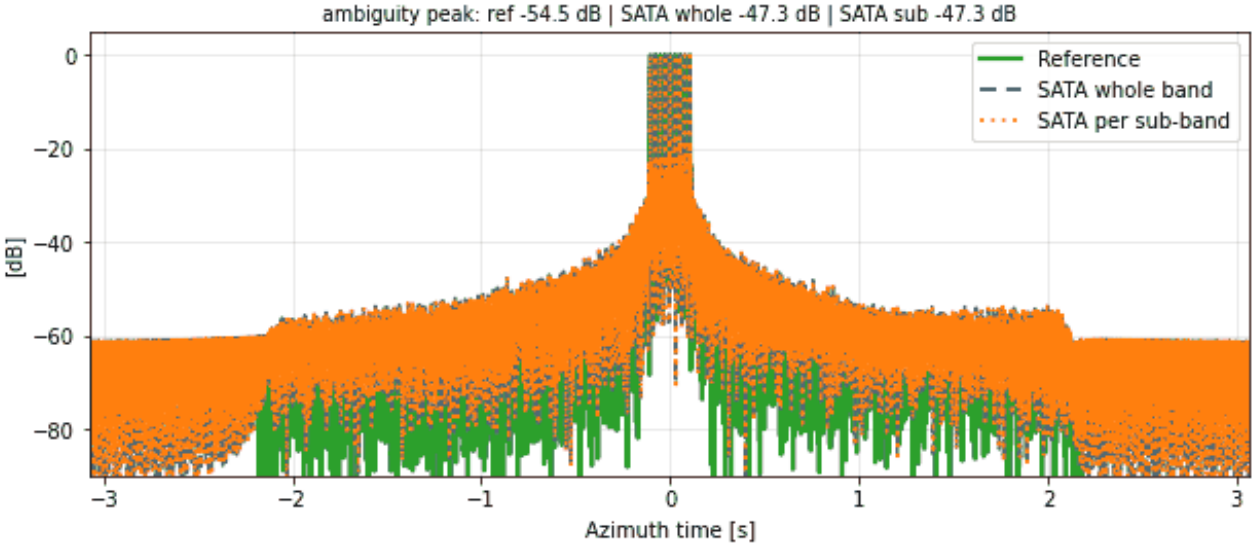

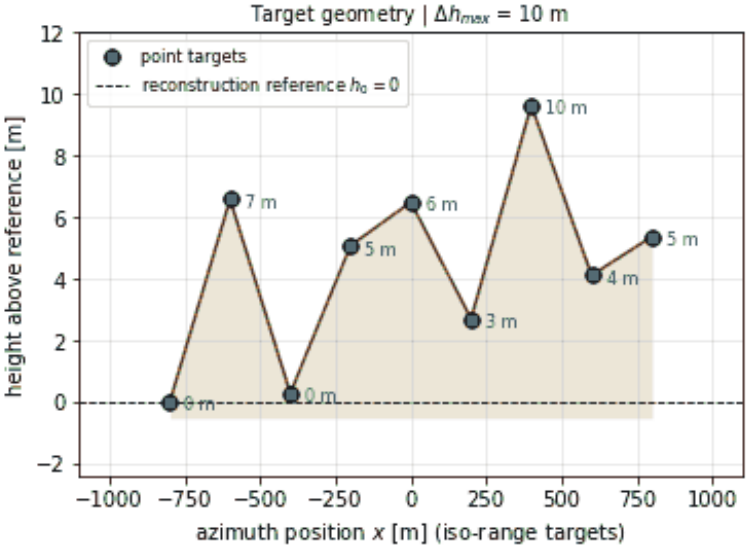





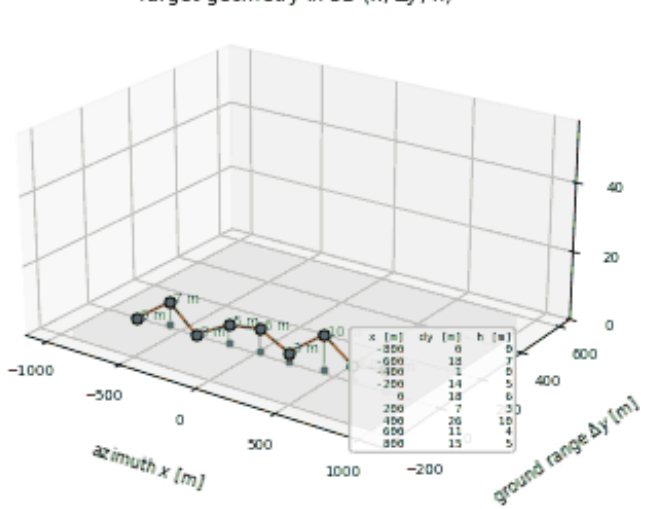


RH-SS-008 | SATA 1D | random heights: N = 9, heights $\sim U(0, 10)$ m, seed 1, targets 200 m apart (small distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

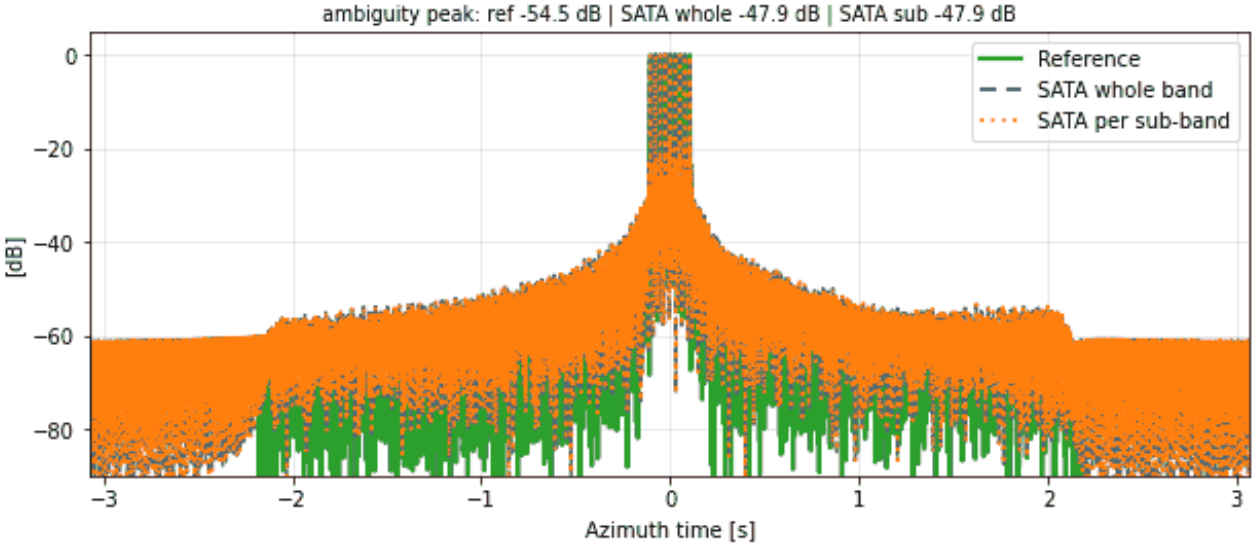

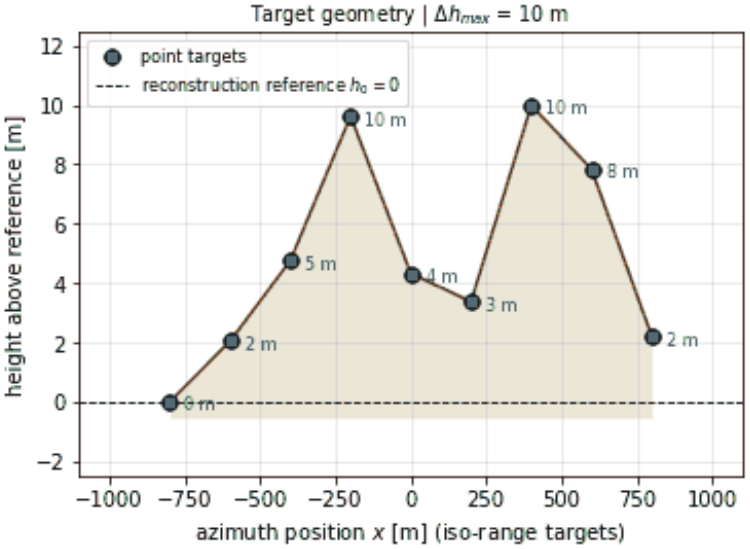





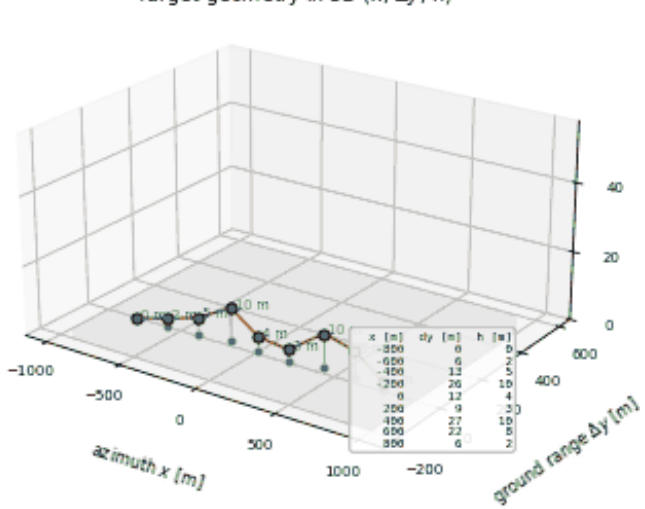



RH-SS-009 | SATA 1D | random heights: N = 9, heights $\sim U(0, 50)$ m, seed 0, targets 200 m apart (small distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

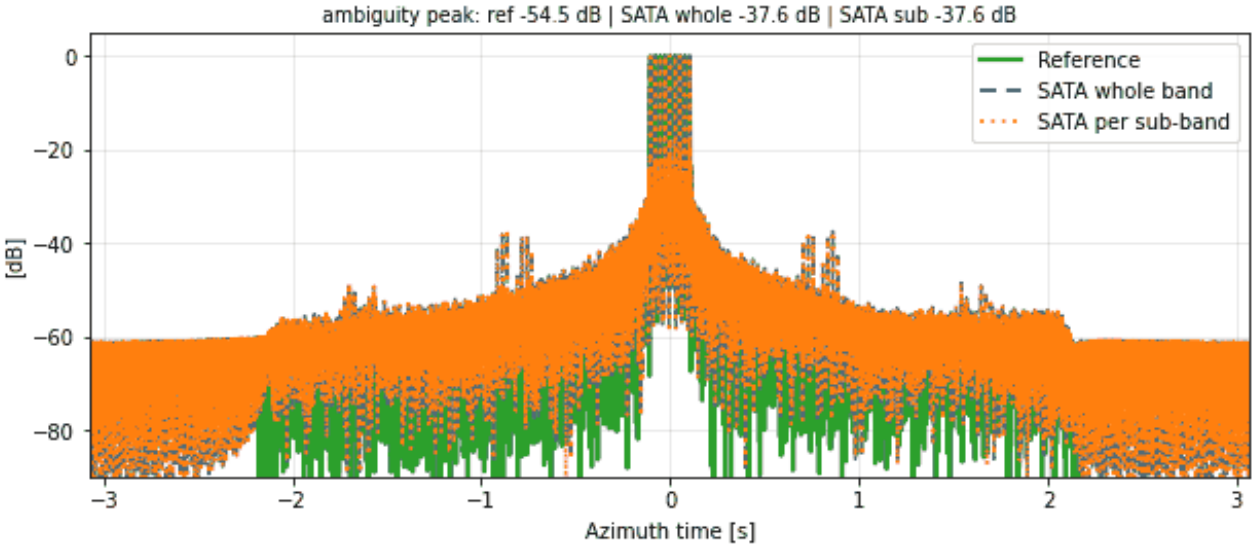


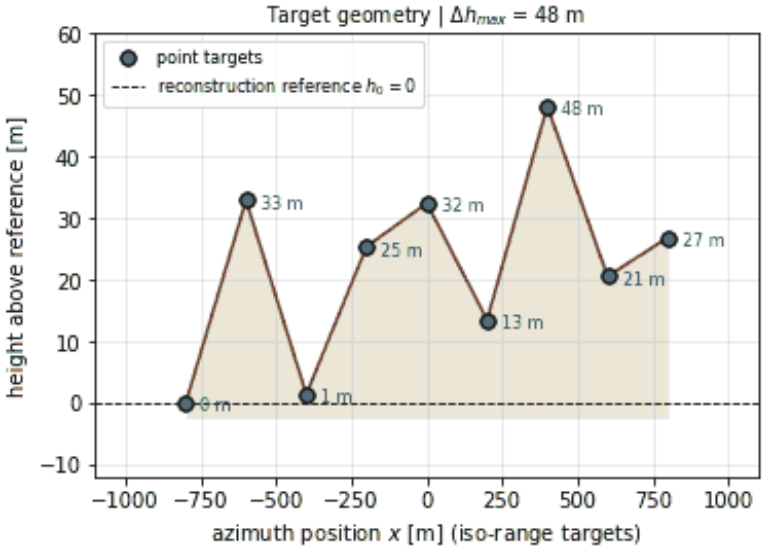


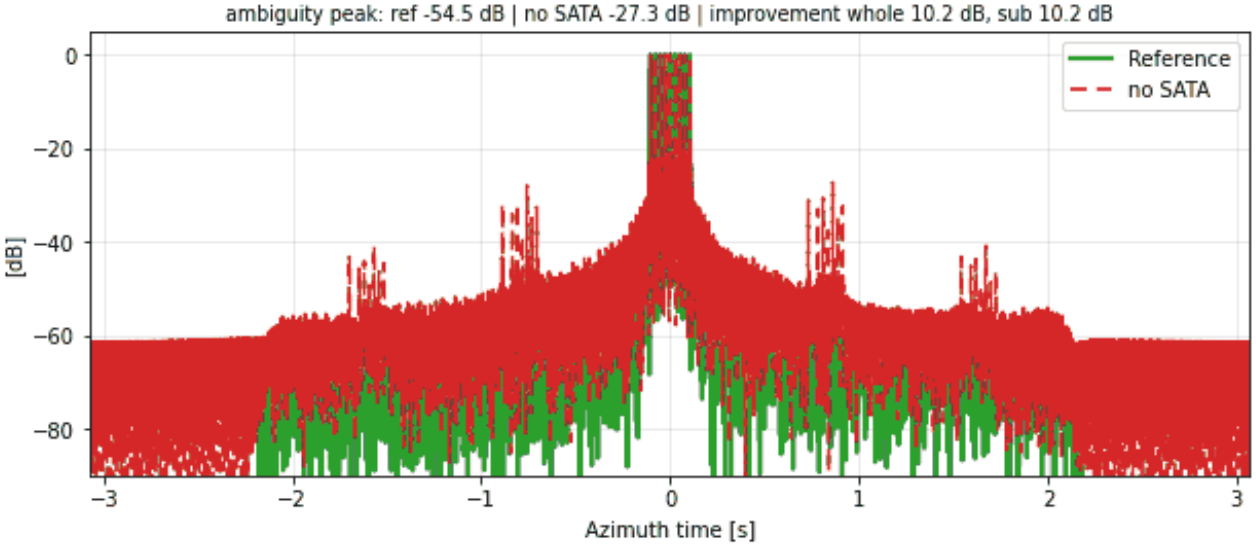


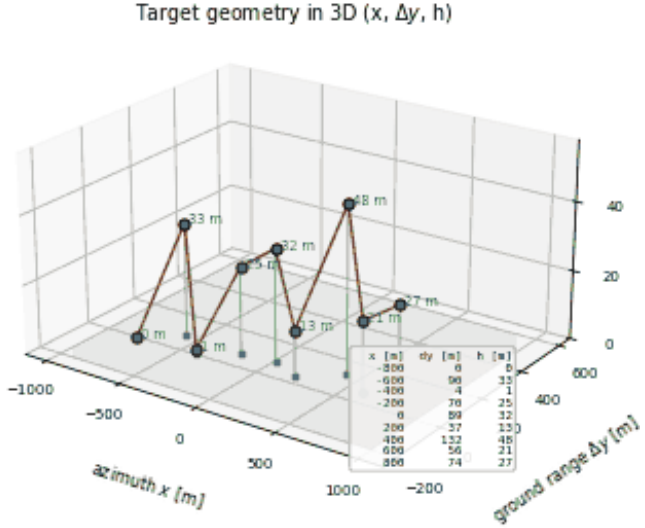


RH-SS-010 | SATA 1D | random heights: N = 9, heights $\sim U(0, 50)$ m, seed 1, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

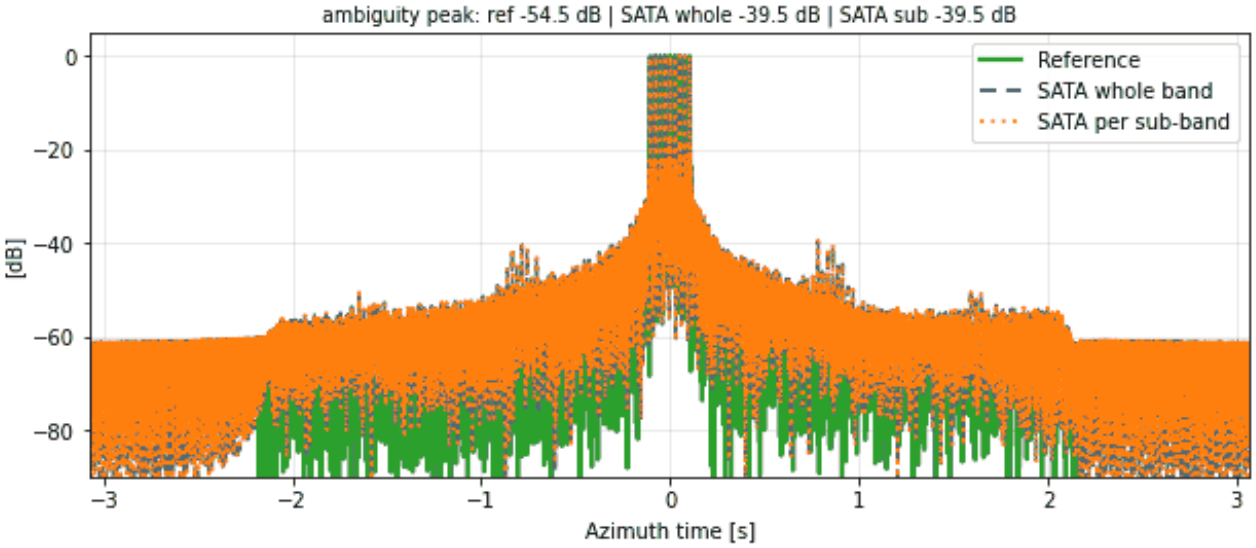

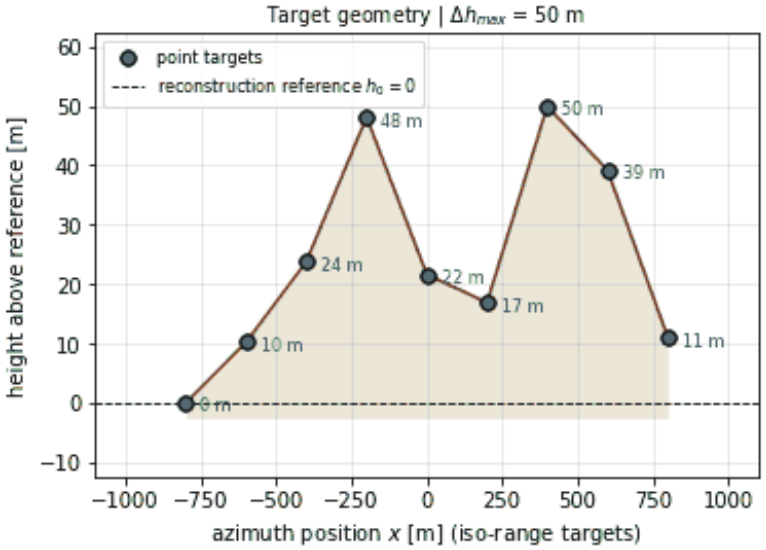


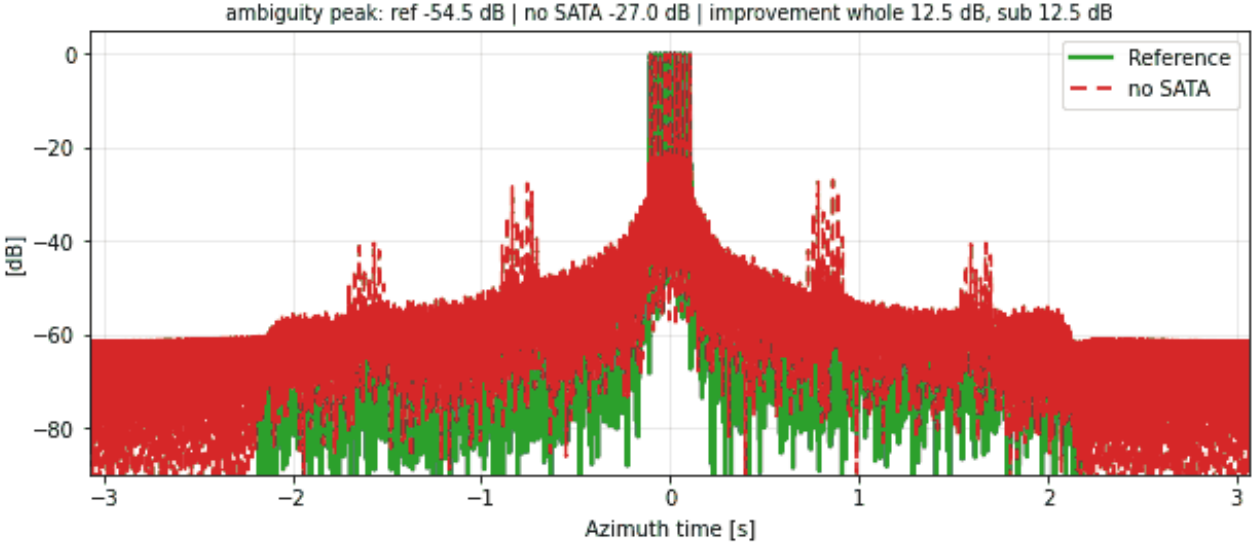


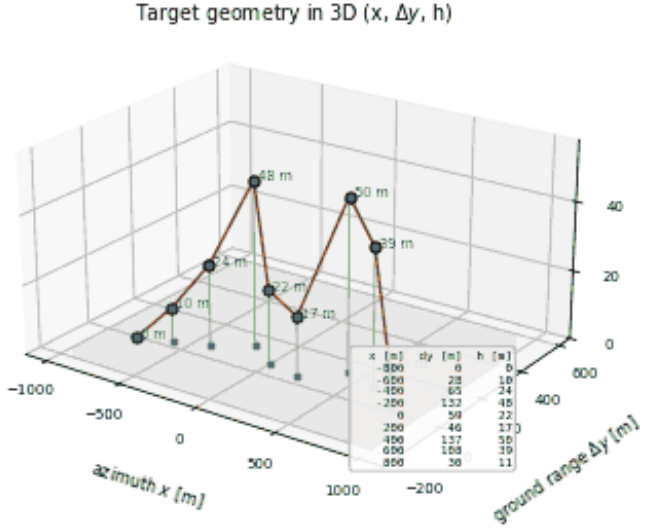



RH-SS-011 | SATA 1D | random heights: N = 9, heights ~ $U(0, 100)$ m, seed 0, targets 200 m apart (small distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

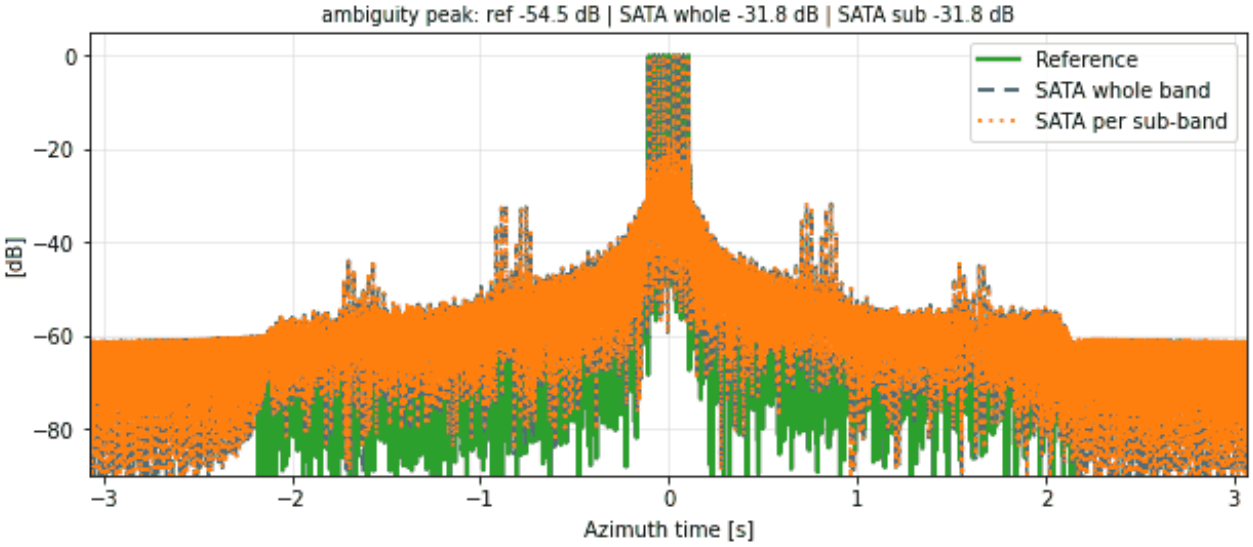

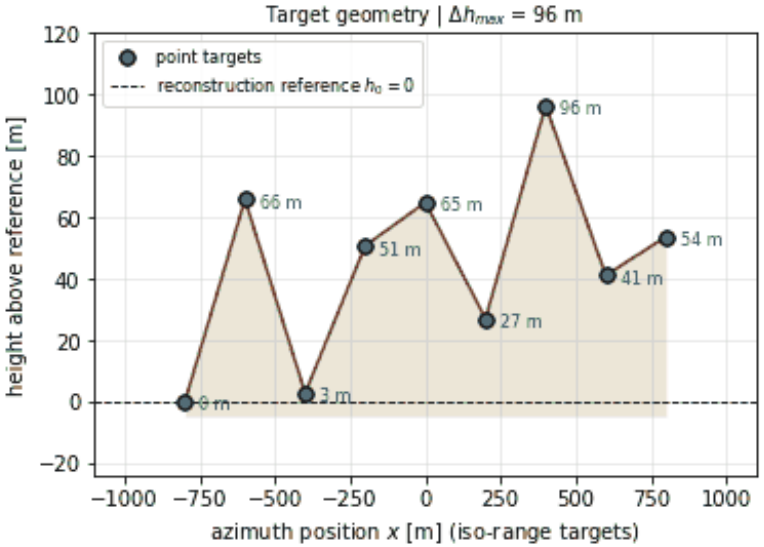


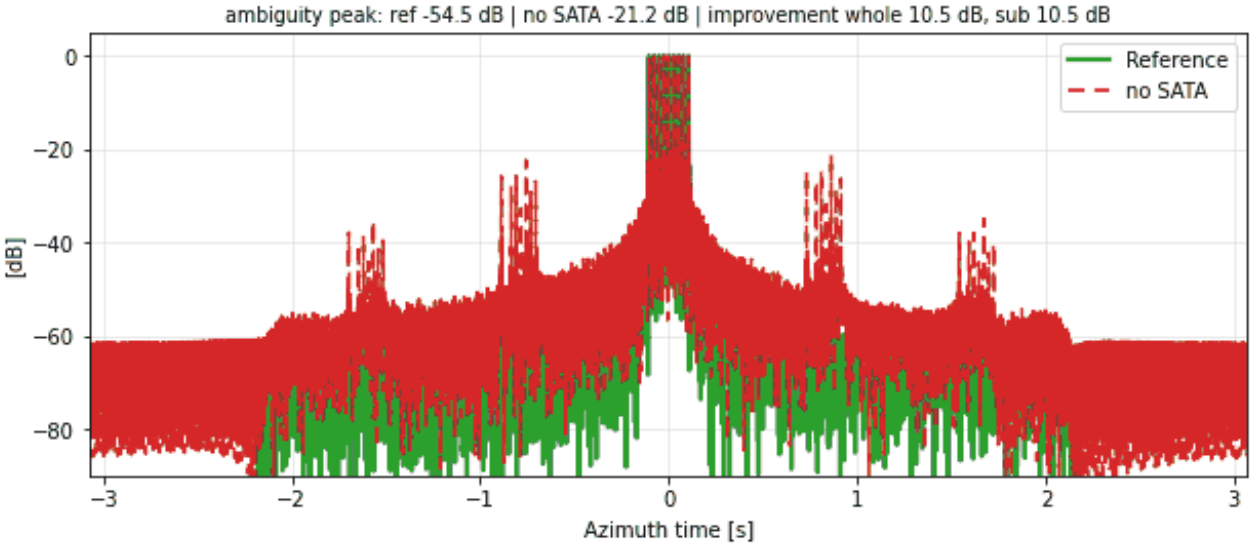


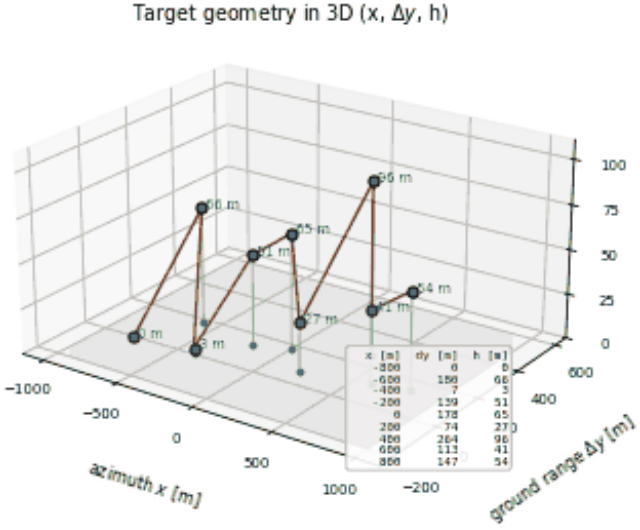



RH-SS-012 | SATA 1D | random heights: N = 9, heights $\sim U(0, 100)$ m, seed 1, targets 200 m apart (small distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

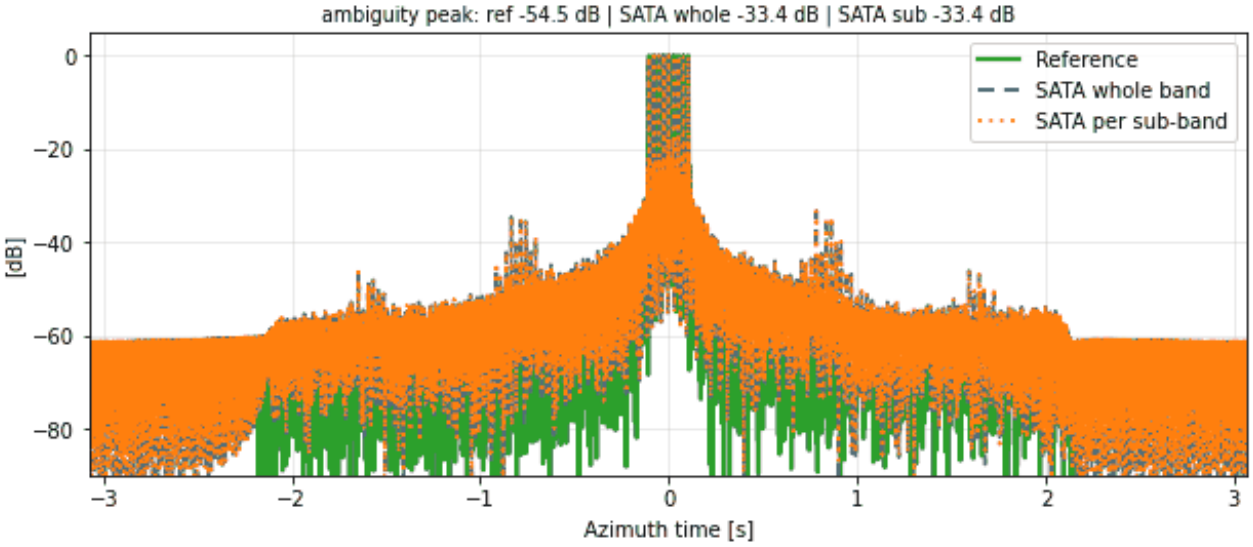


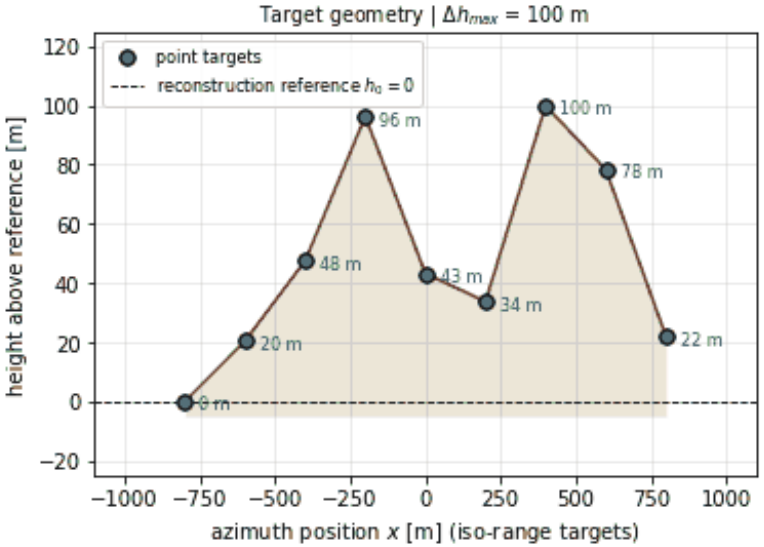


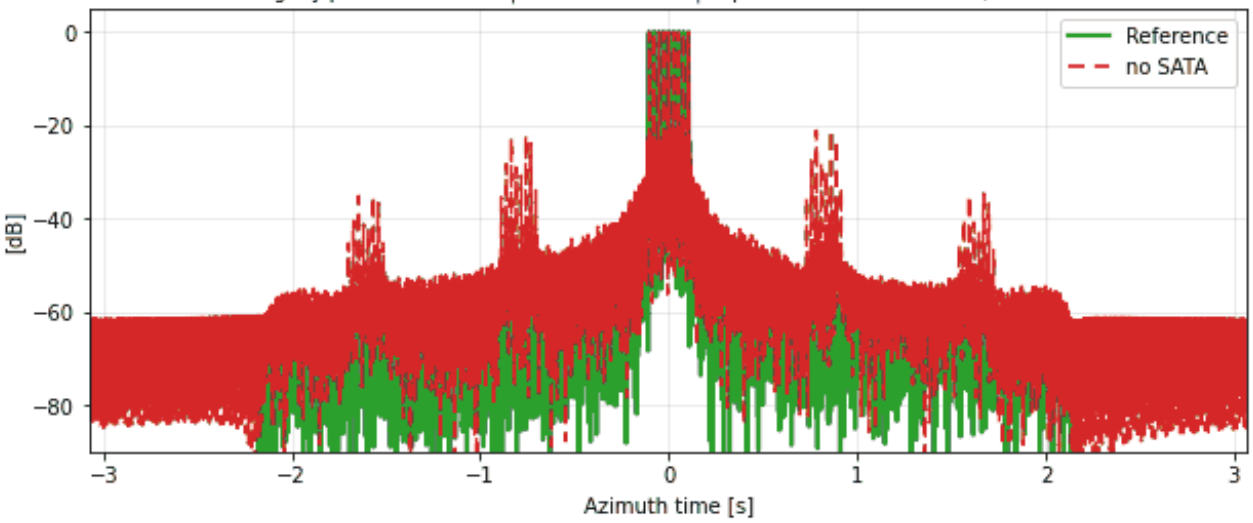


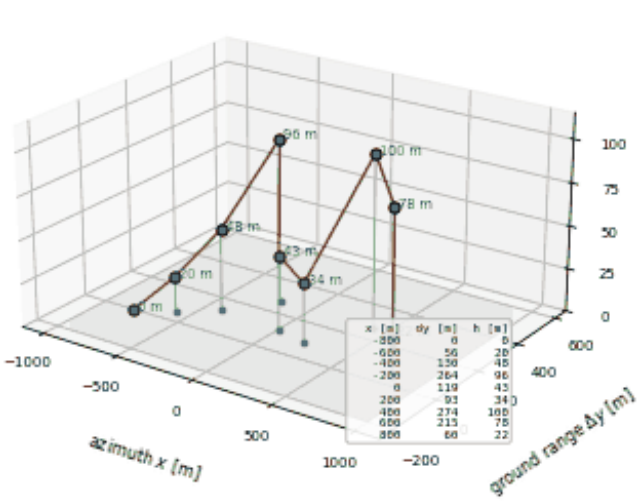


RH-SS-013 | SATA 1D | random heights: N = 13, heights $\sim U(0, 10)$ m, seed 0, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

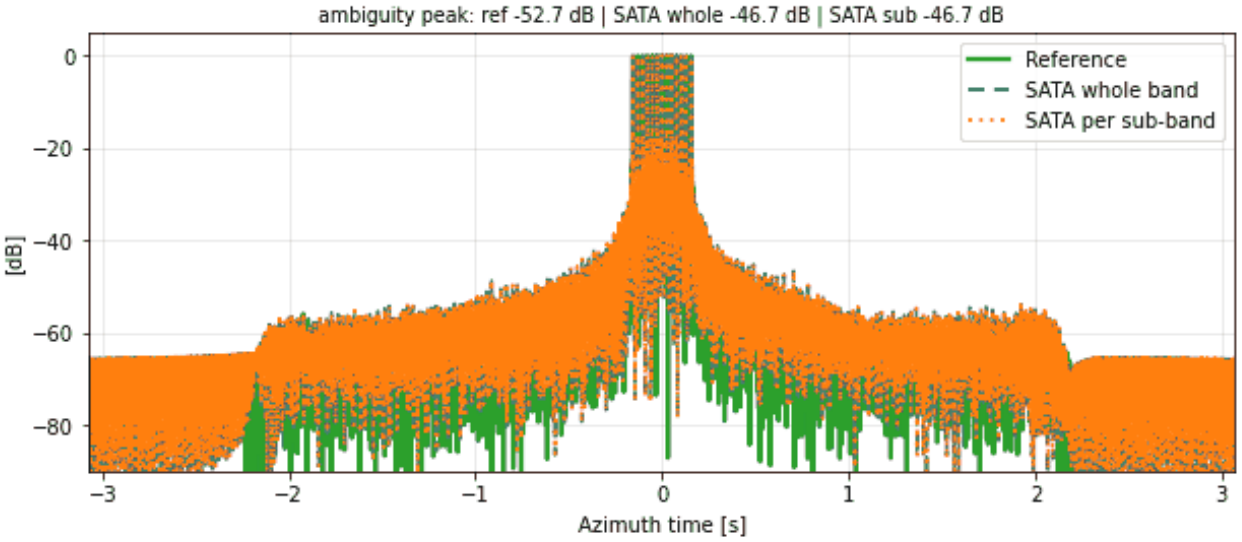

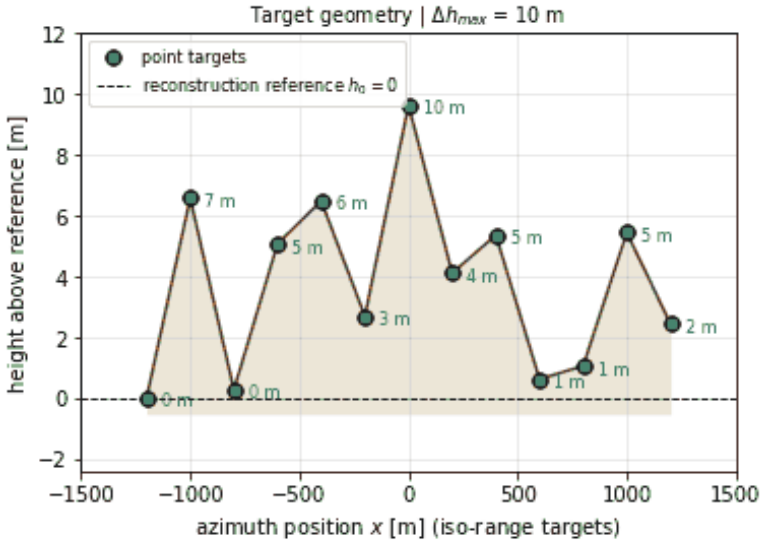


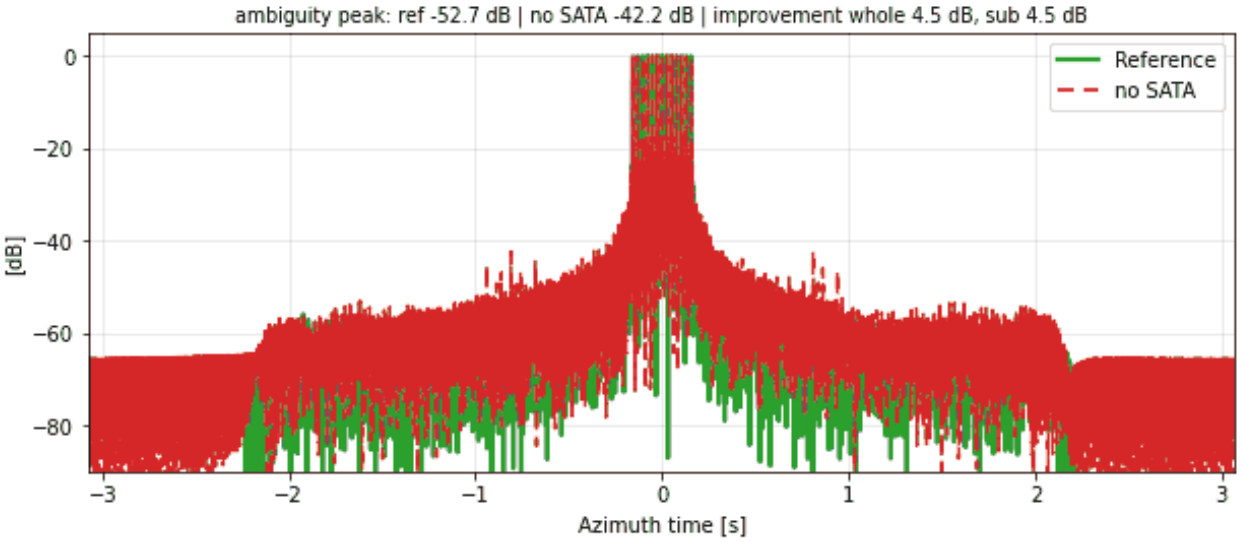


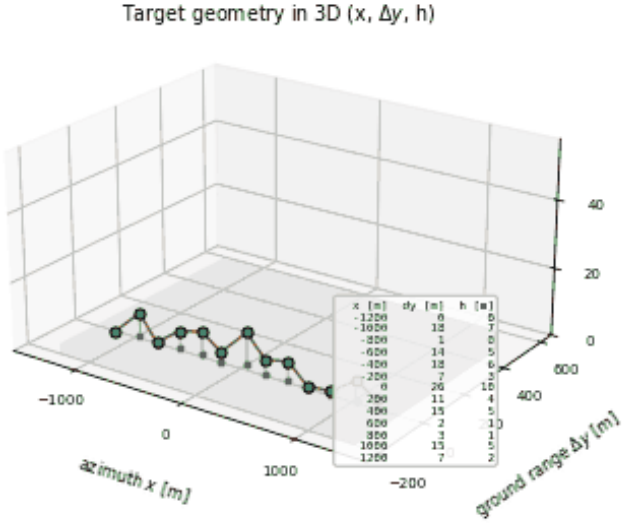



RH-SS-014 | SATA 1D | random heights: N = 13, heights $\sim U(0, 10)$ m, seed 1, targets 200 m apart (small distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

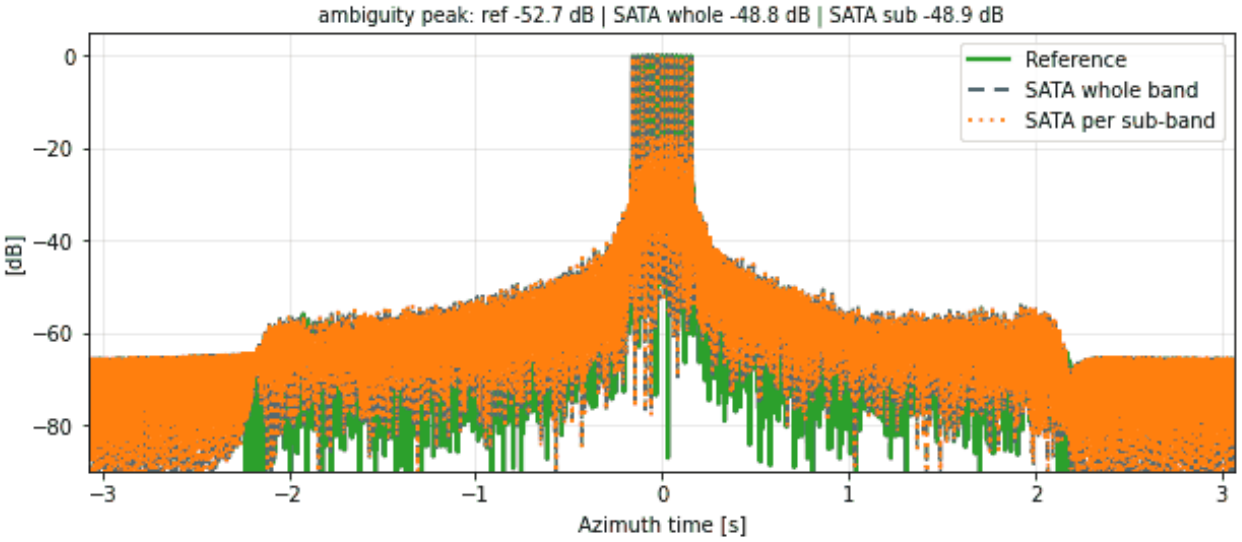


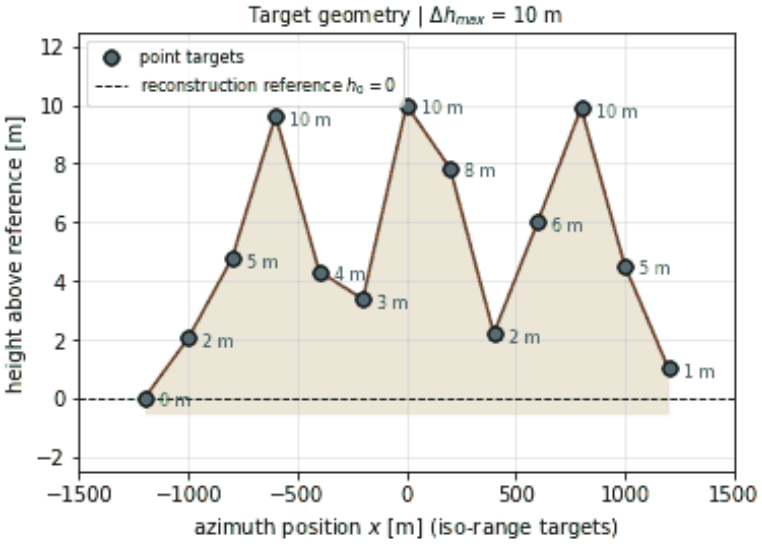


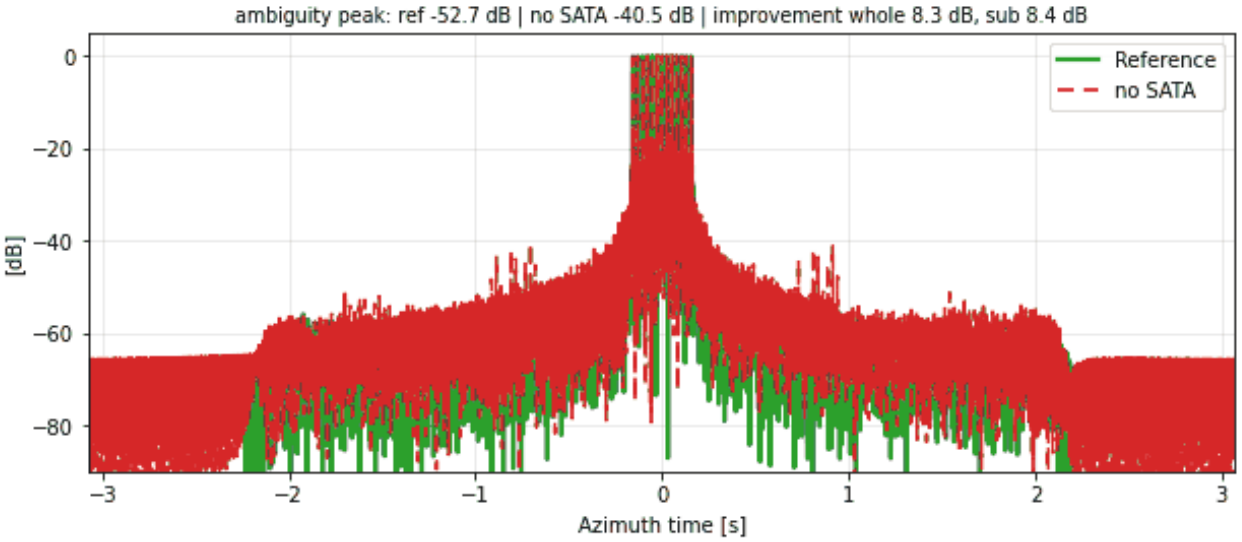


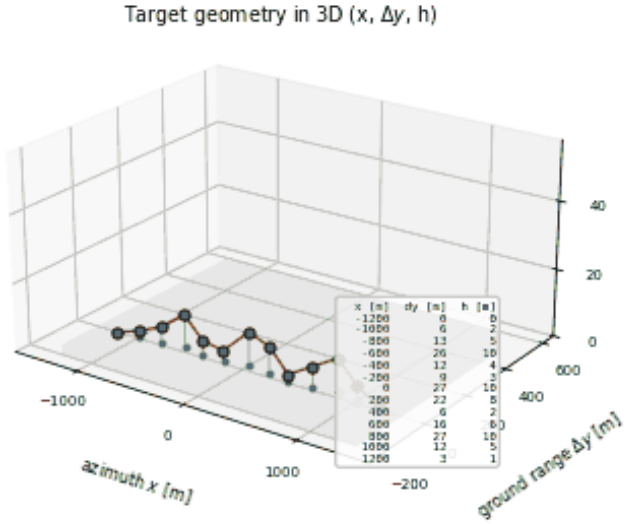


RH-SS-015 | SATA 1D | random heights: N = 13, heights $\sim U(0, 50)$ m, seed 0, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

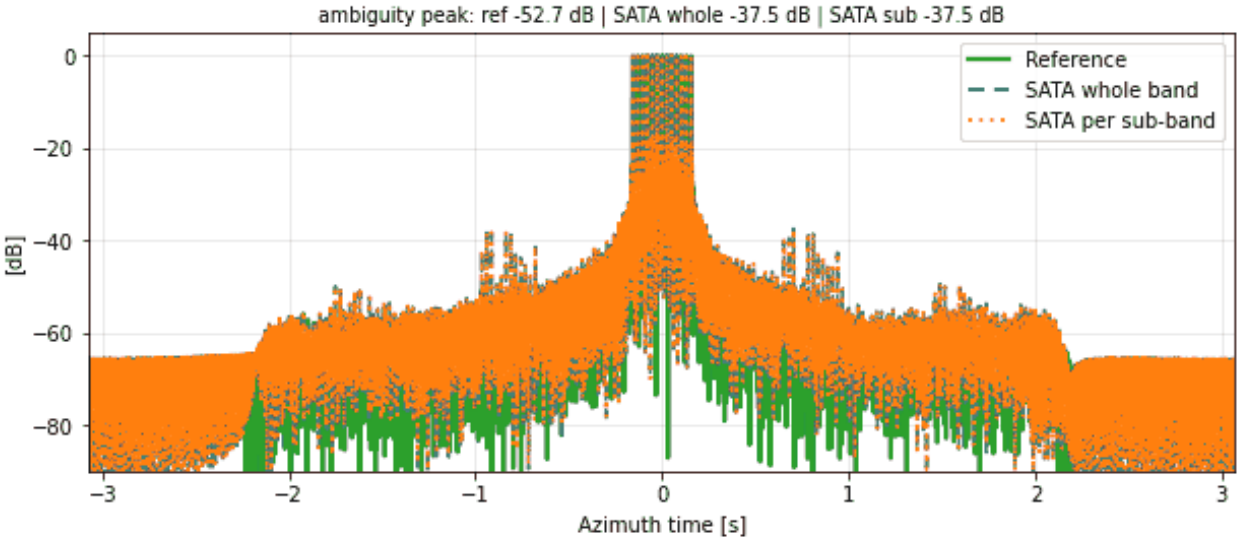


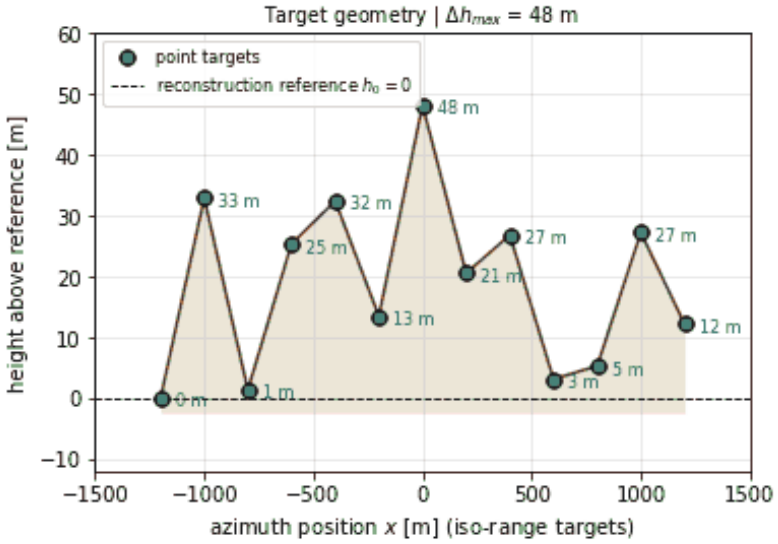


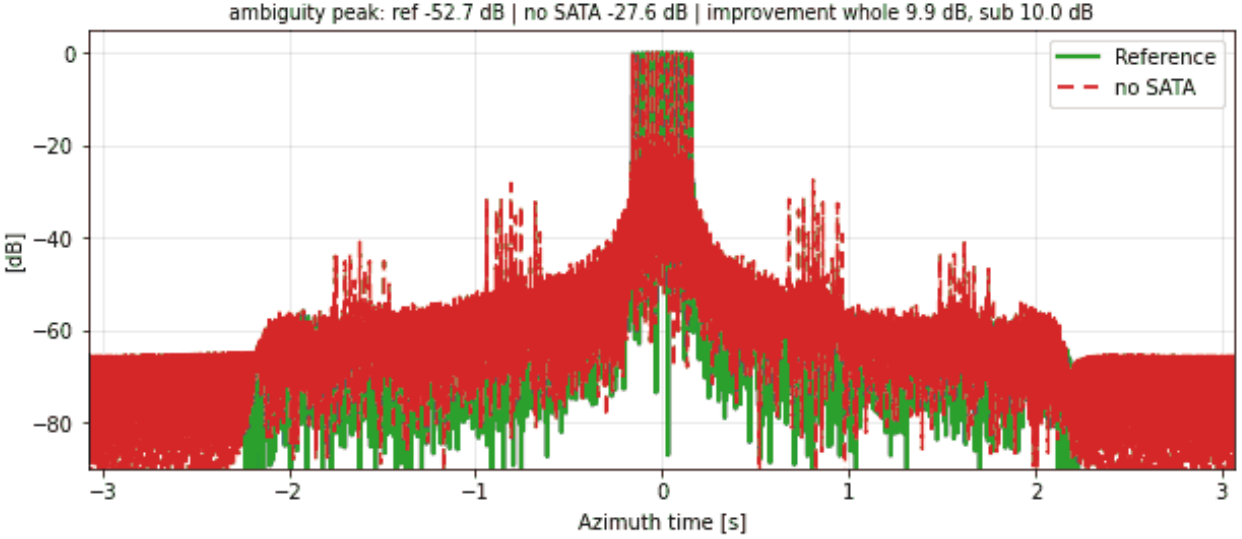


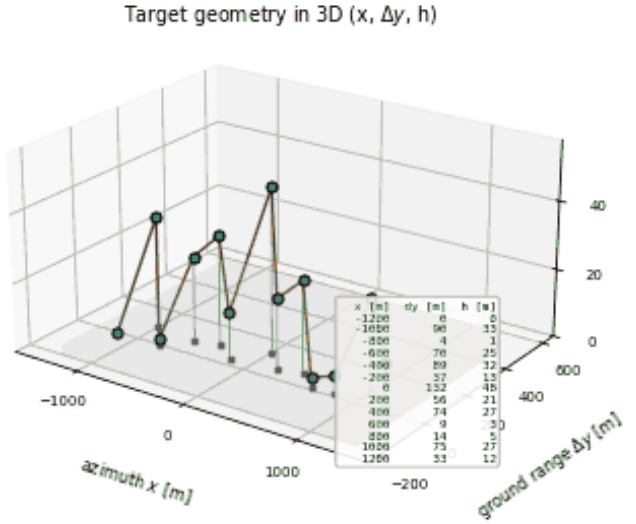


RH-SS-016 | SATA 1D | random heights: N = 13, heights $\sim U(0, 50)$ m, seed 1, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

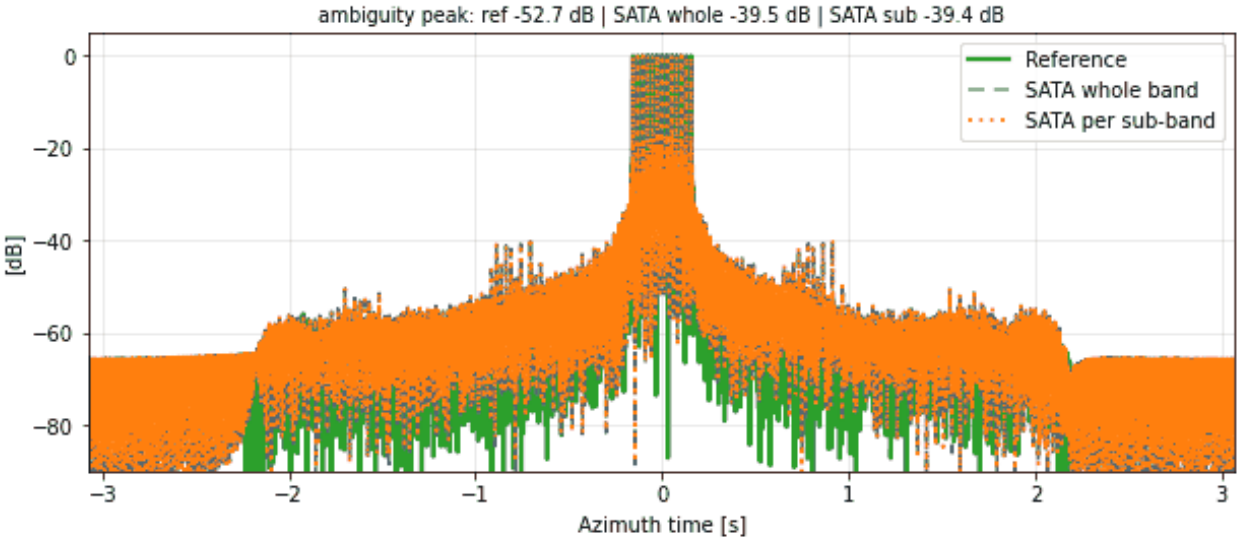


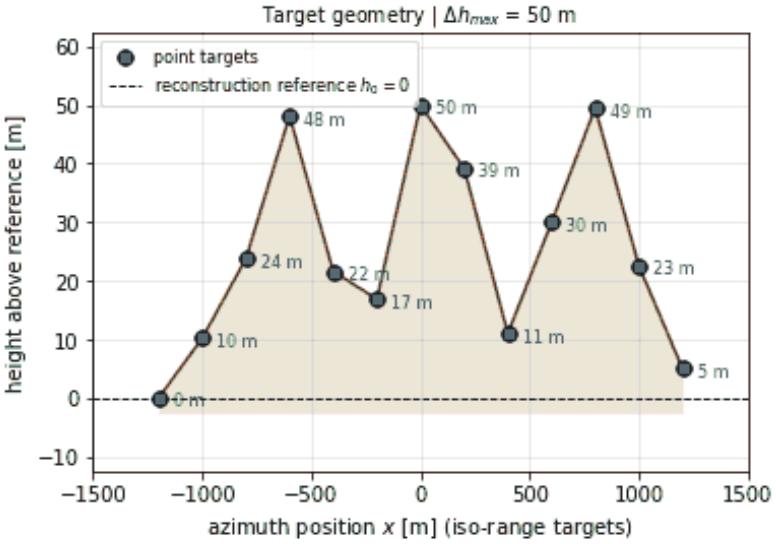


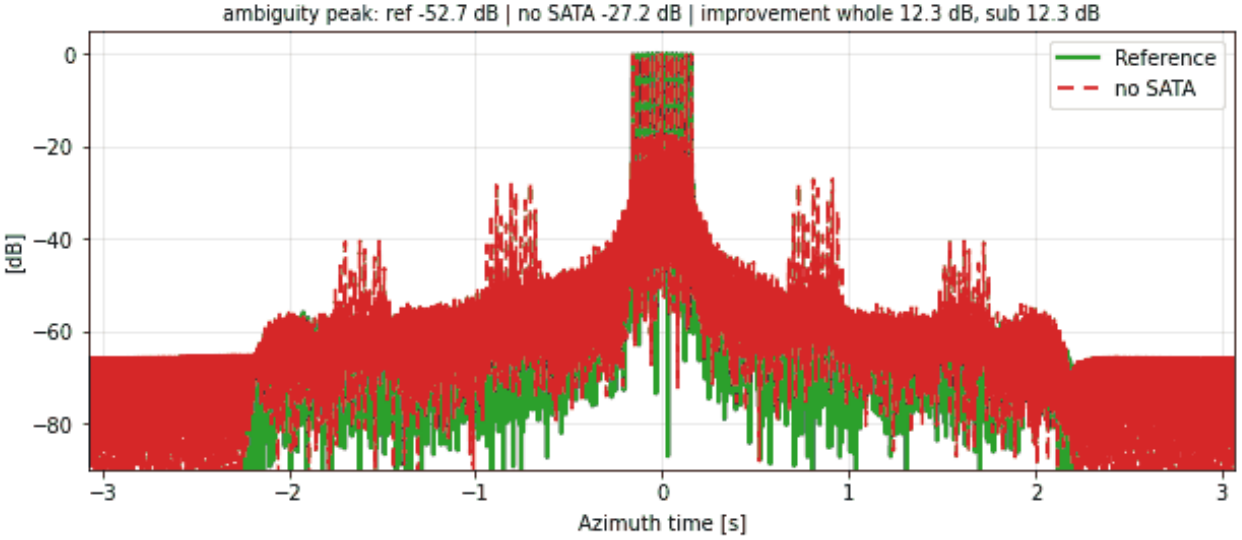


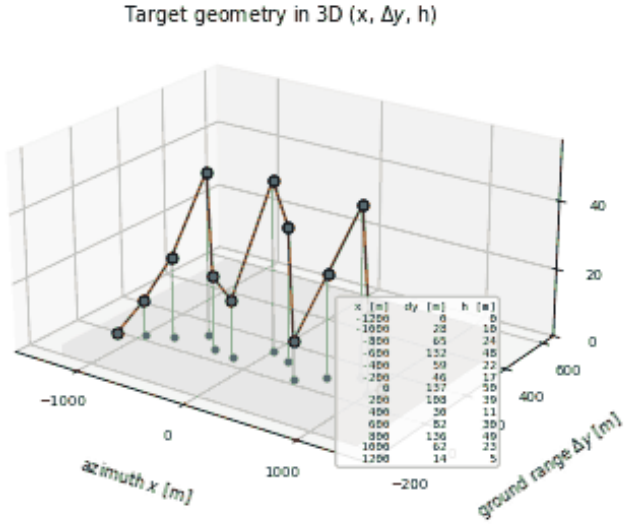


RH-SS-017 | SATA 1D | random heights: N = 13, heights $\sim U(0, 100)$ m, seed 0, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

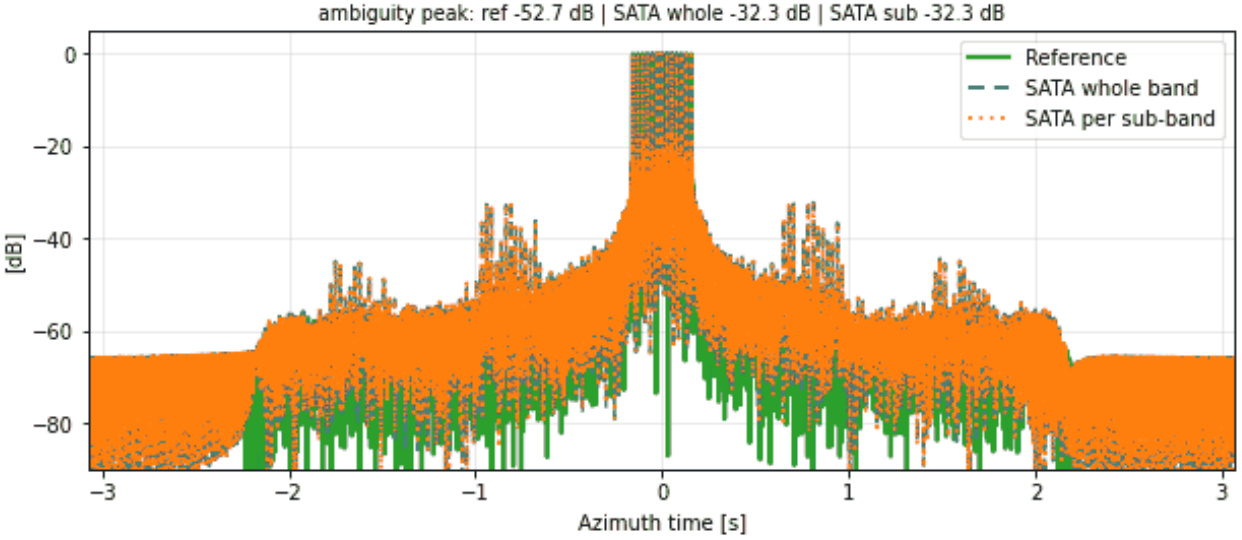


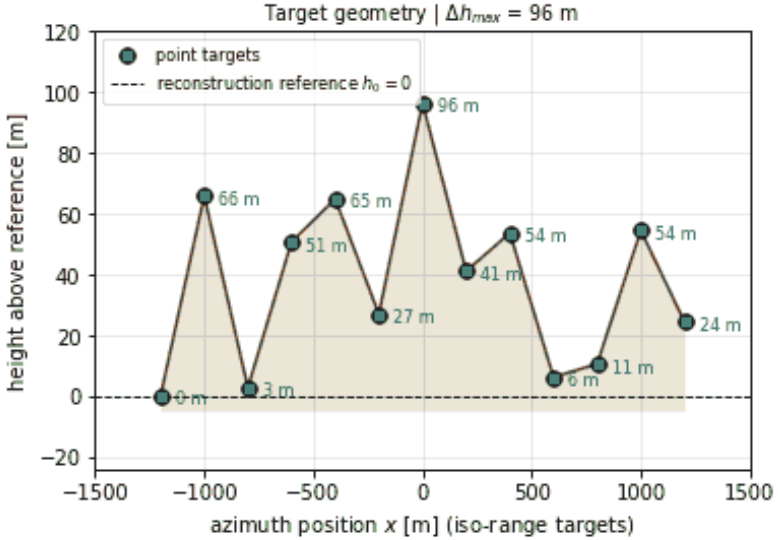


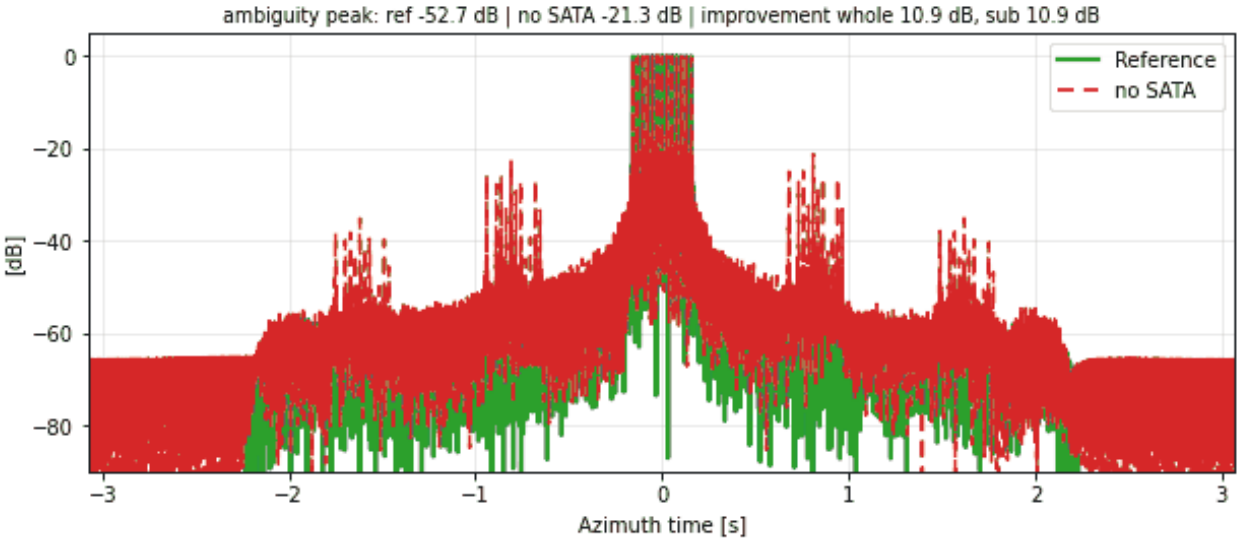


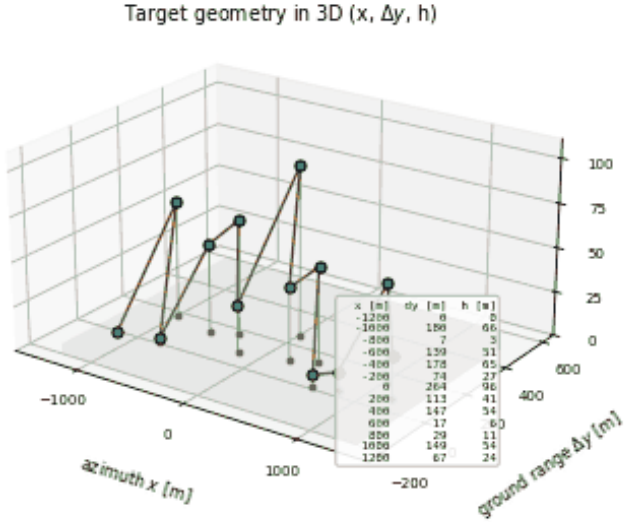


RH-SS-018 | SATA 1D | random heights: N = 13, heights $\sim U(0, 100)$ m, seed 1, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

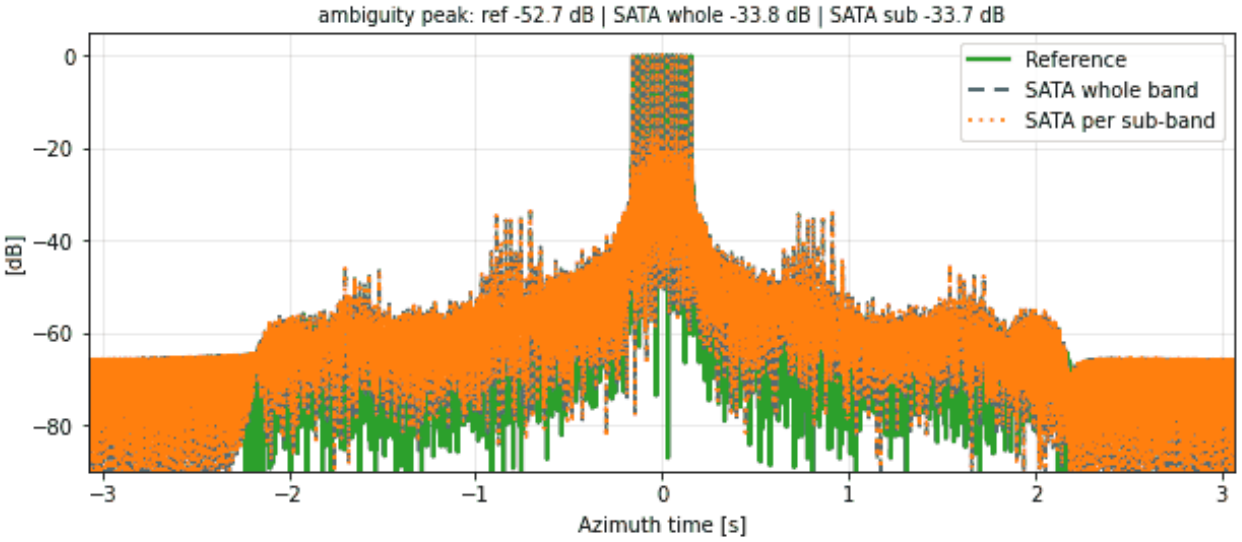

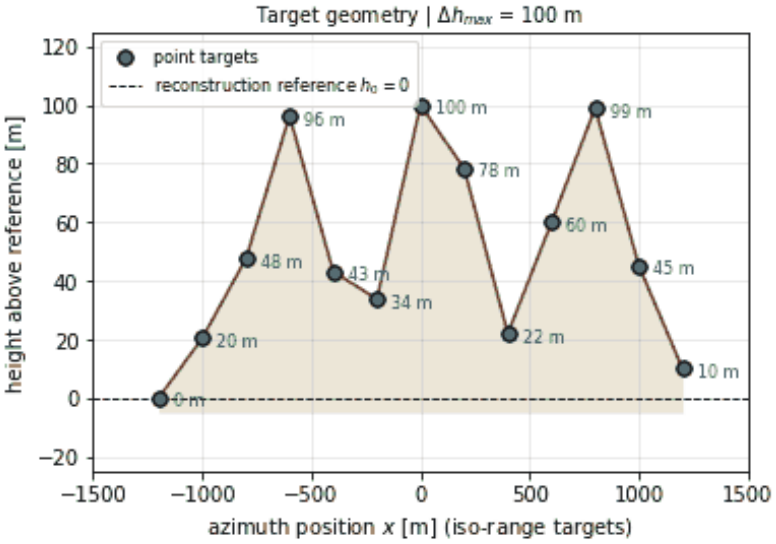


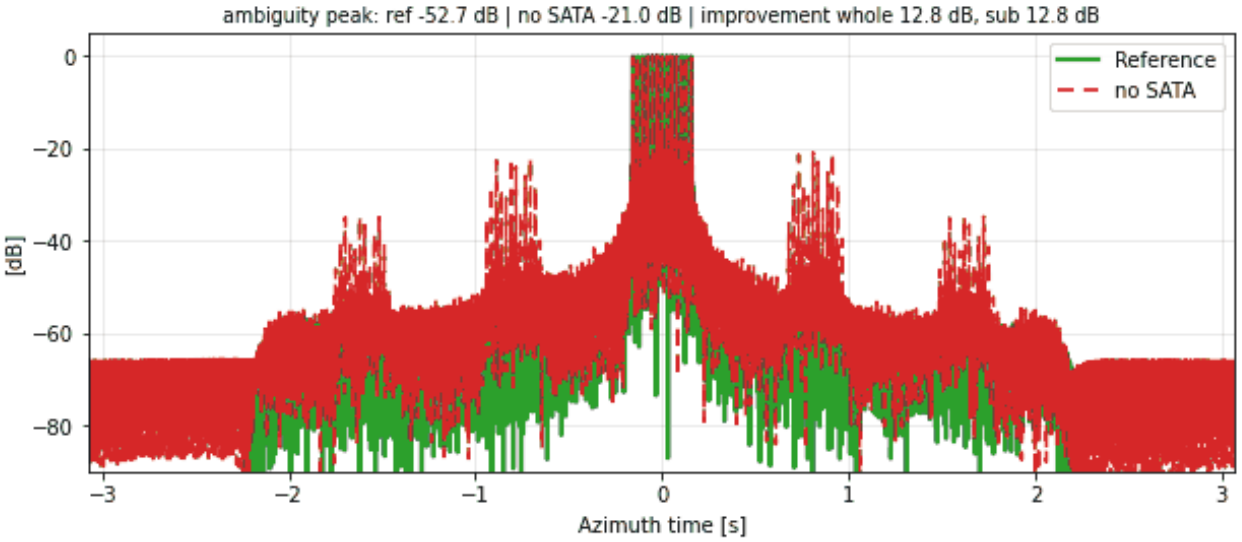


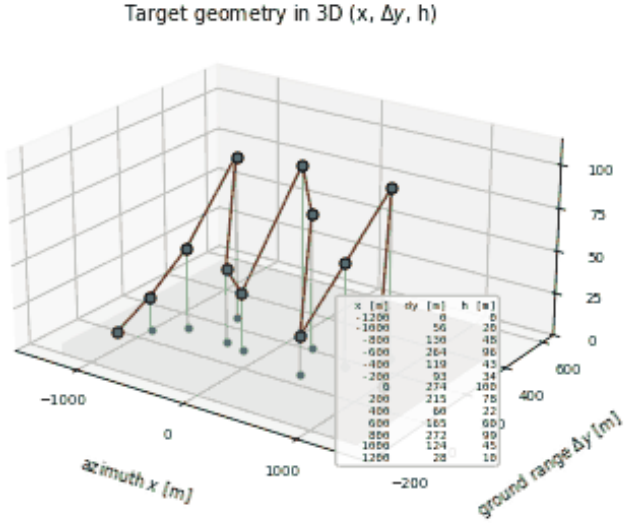



RH-SN-001 | SATA 1D | random heights: N = 5, heights $\sim U(0, 100)$ m, seed 0, targets 200 m apart (small distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

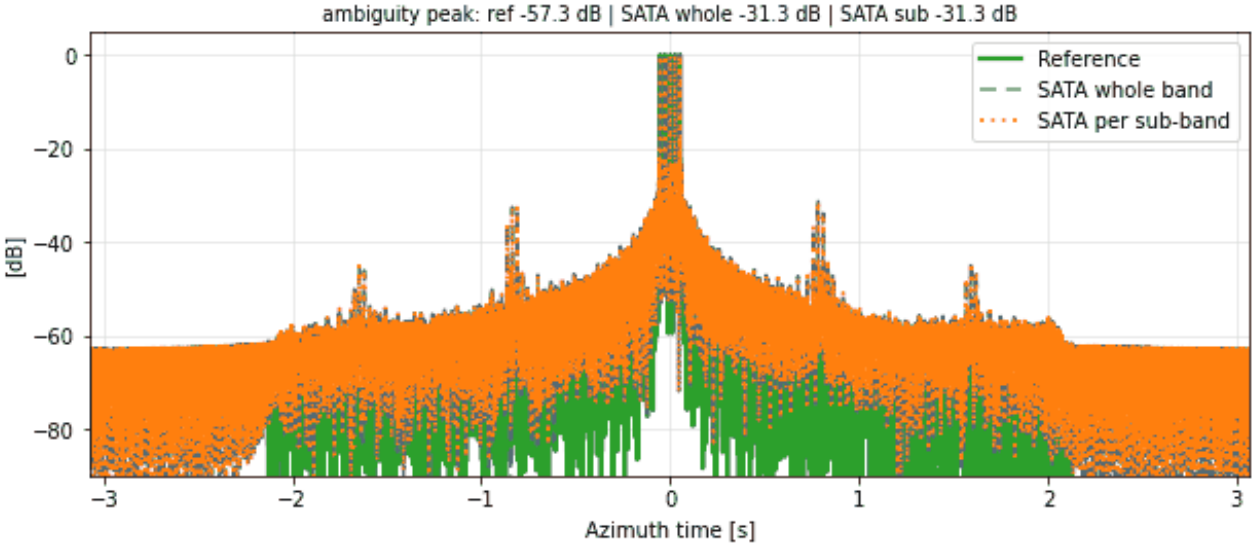

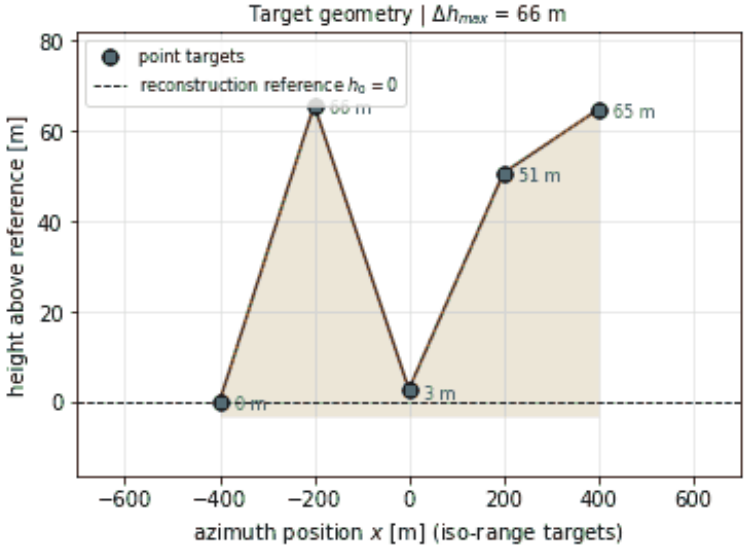


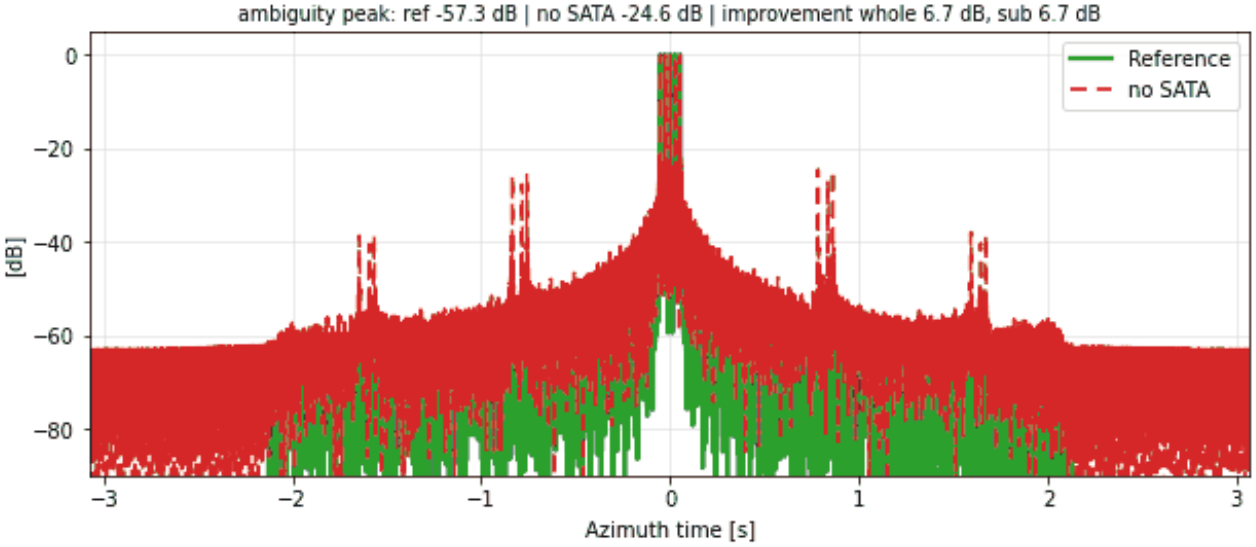


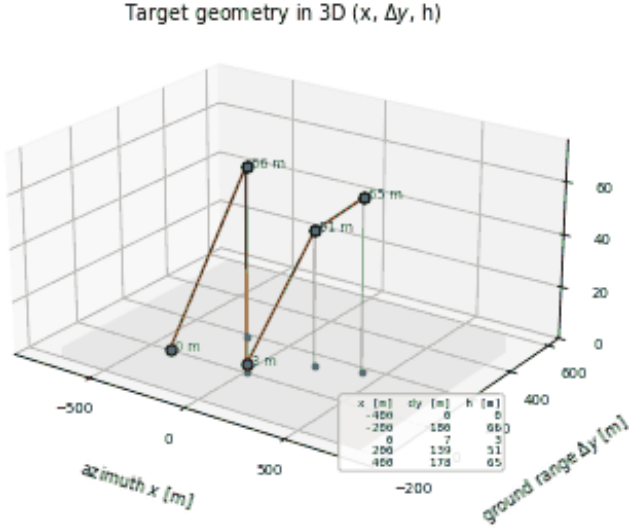



RH-SN-002 | SATA 1D | random heights: N = 5, heights $\sim U(0, 100)$ m, seed 1, targets 200 m apart (small distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

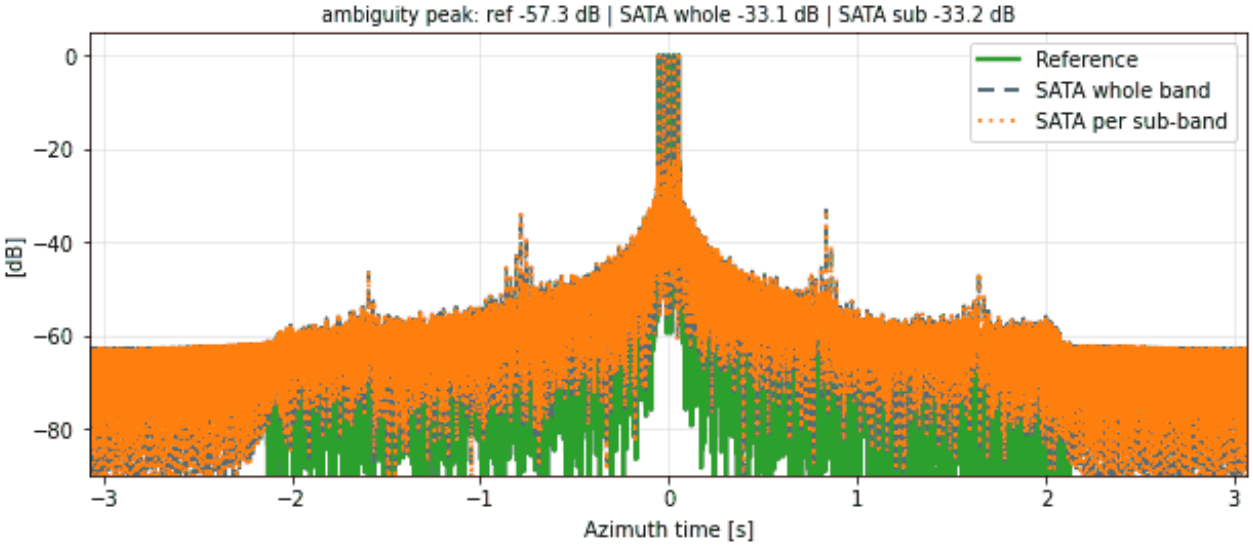

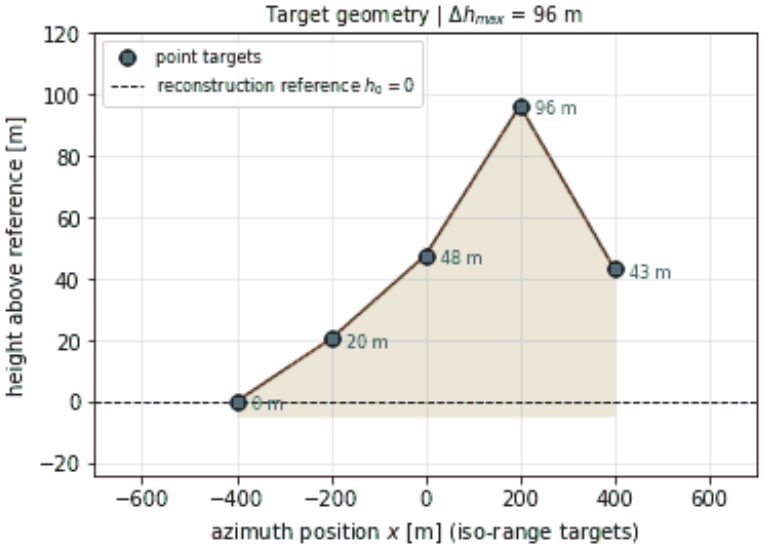


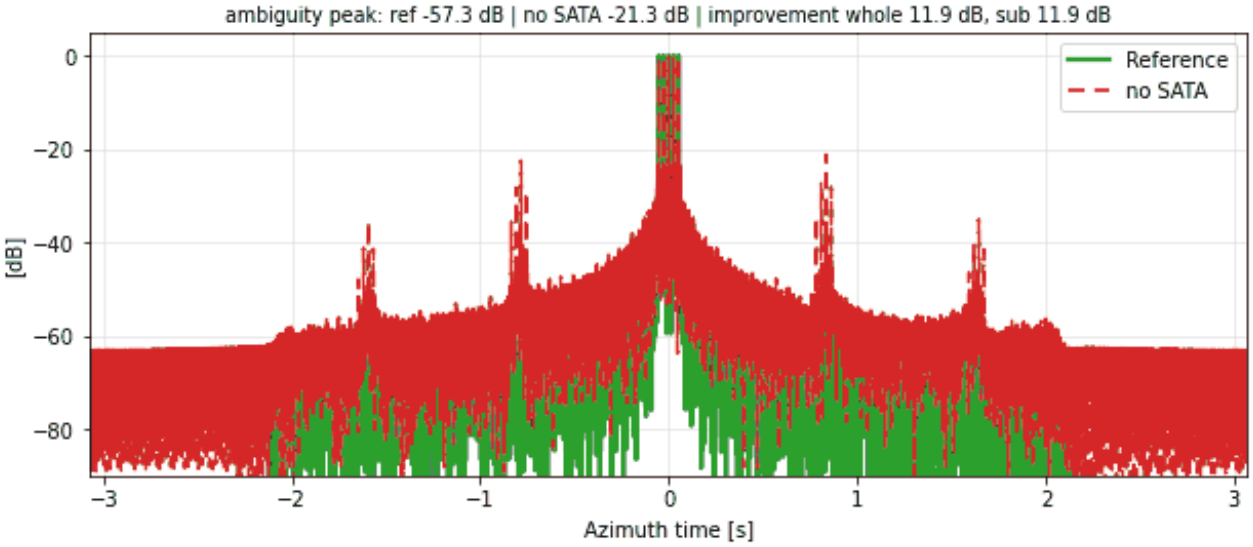


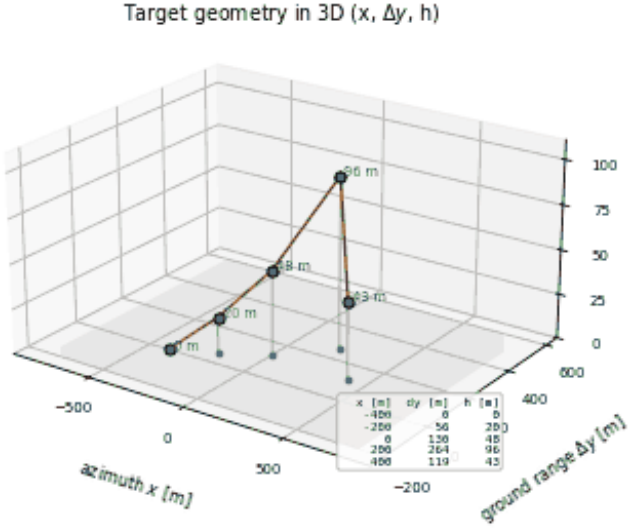



RH-SN-003 | SATA 1D | random heights: N = 5, heights $\sim U(0, 500)$ m, seed 0, targets 200 m apart (small distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

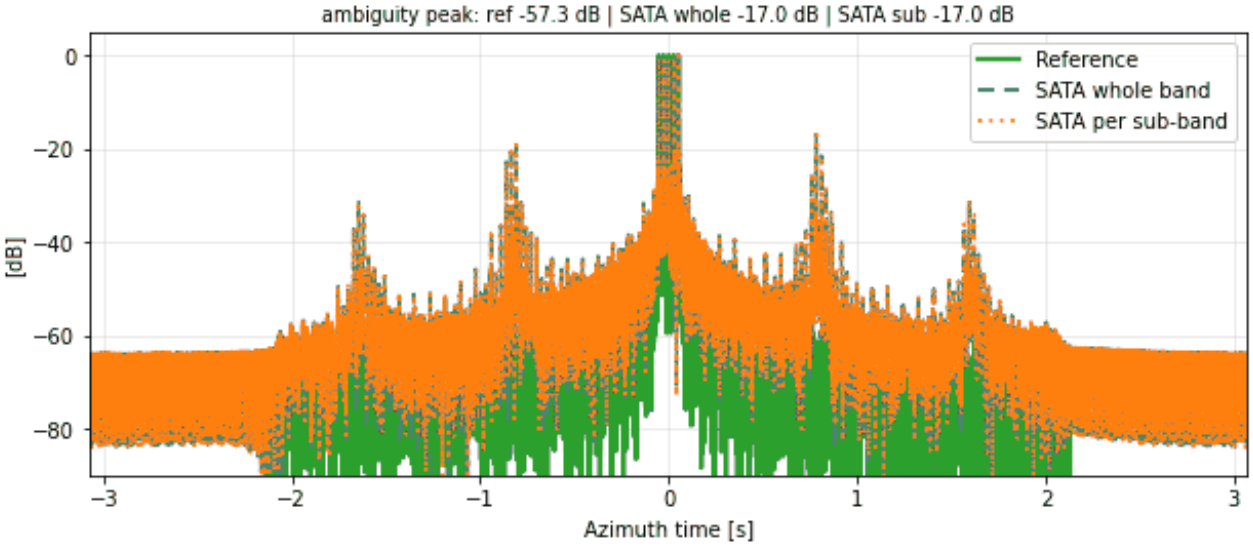

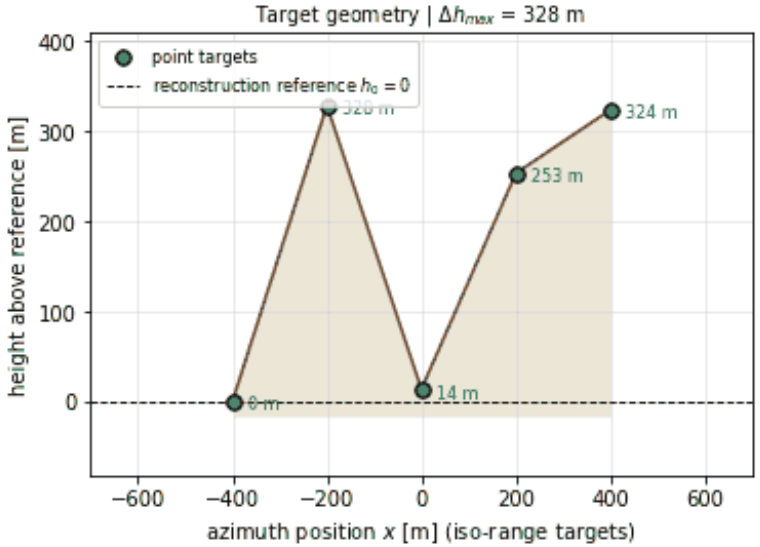


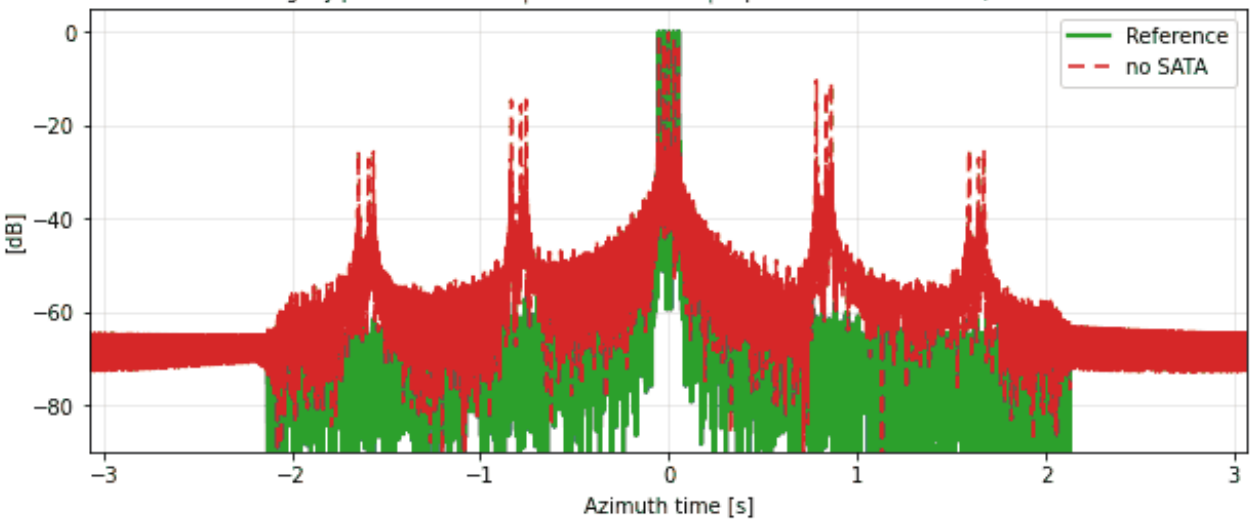


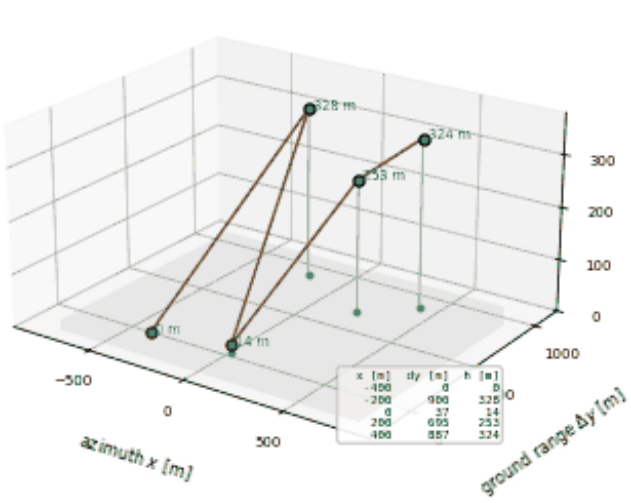



RH-SN-004 | SATA 1D | random heights: N = 5, heights $\sim U(0, 500)$ m, seed 1, targets 200 m apart (small distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

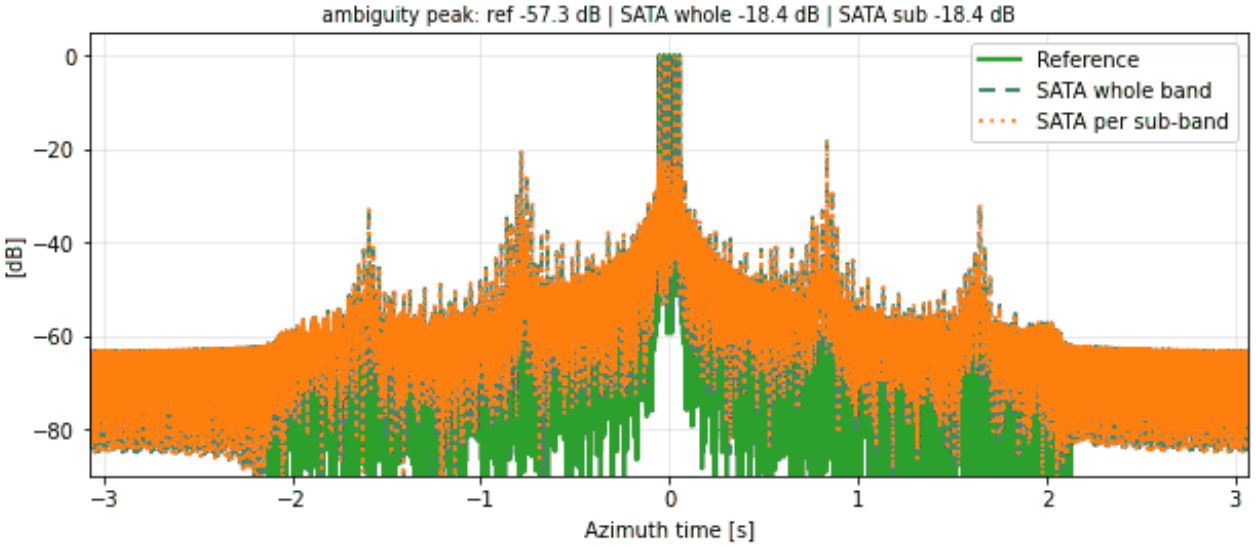

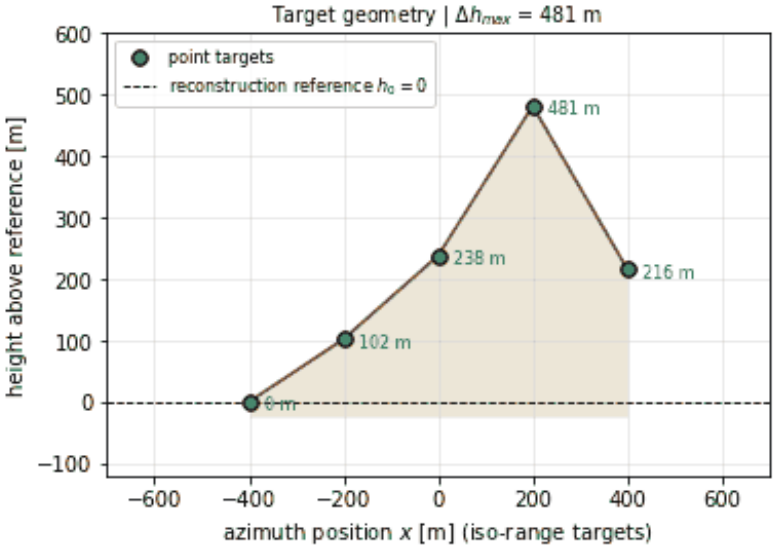


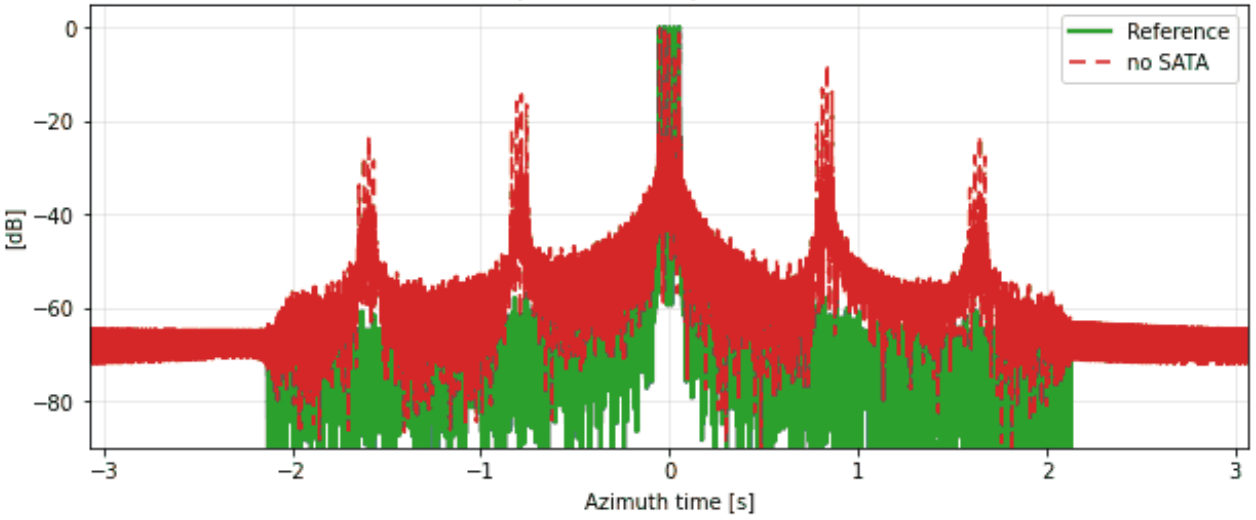


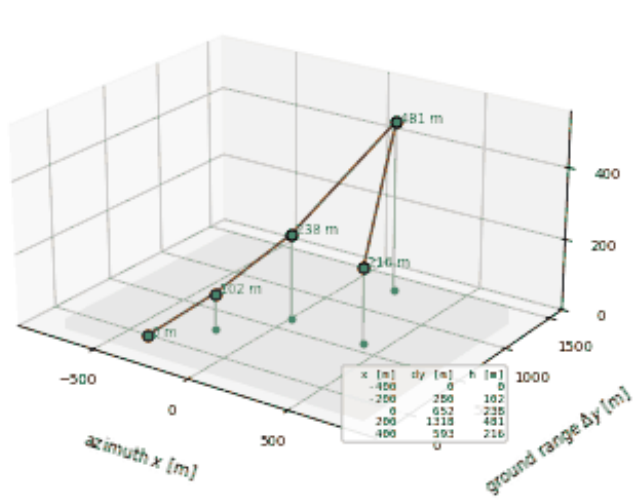



RH-SN-005 | SATA 1D | random heights: N = 5, heights $\sim U(0, 1000)$ m, seed 0, targets 200 m apart (small distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

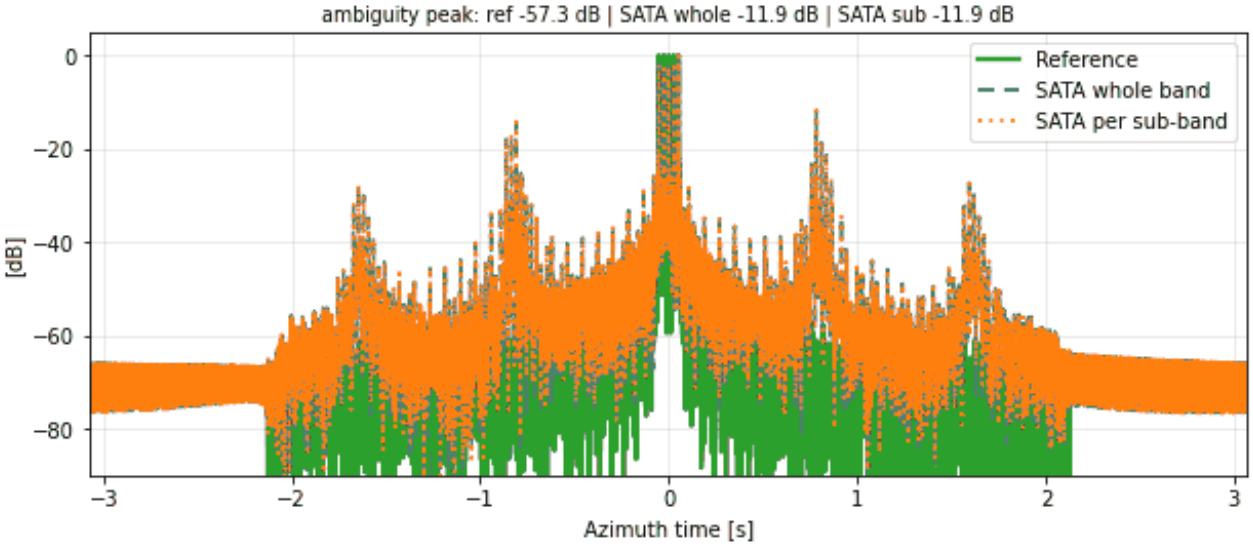

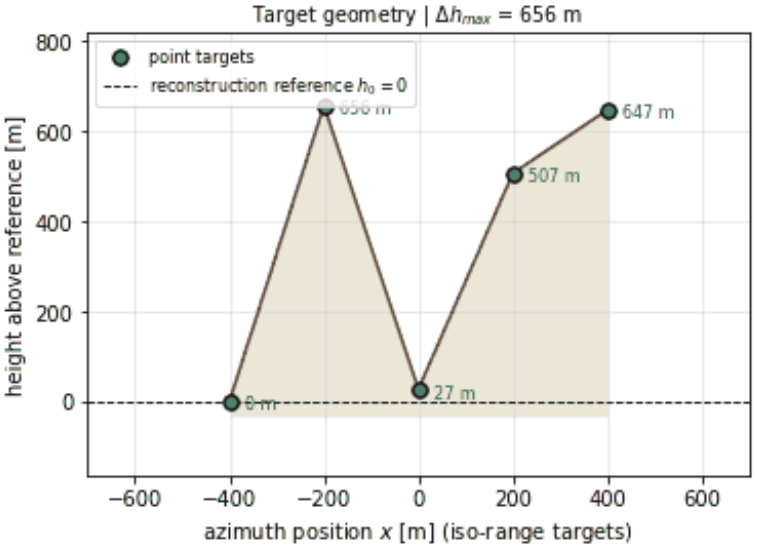


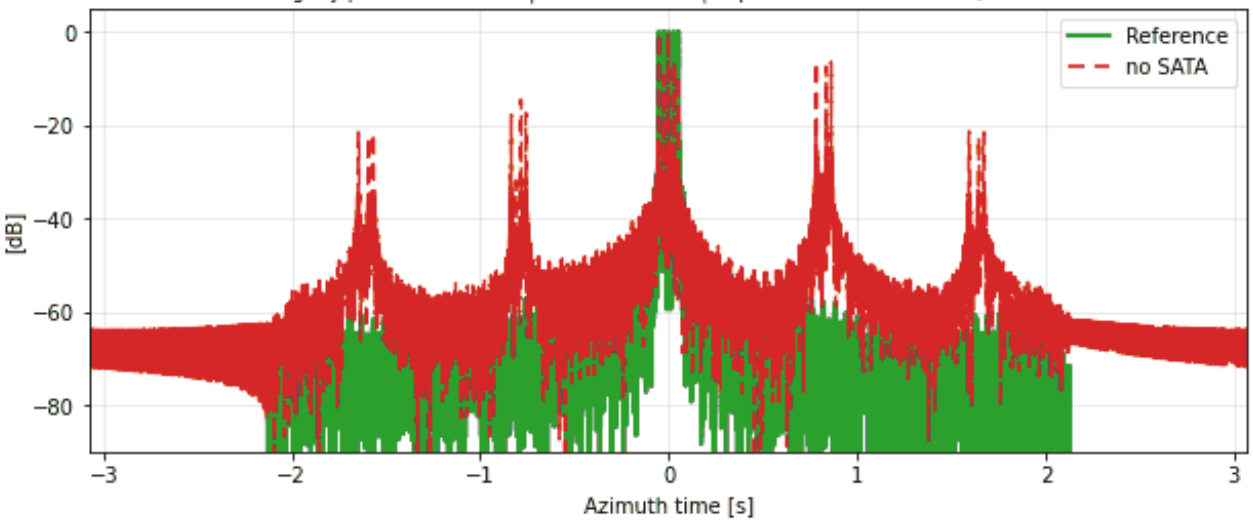


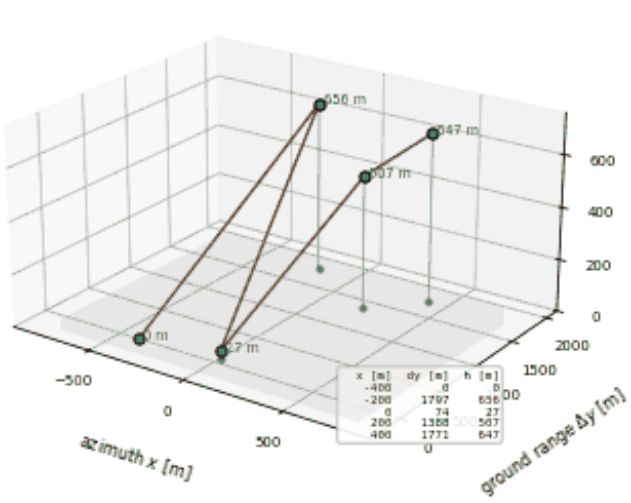



RH-SN-006 | SATA 1D | random heights: N = 5, heights $\sim U(0, 1000)$ m, seed 1, targets 200 m apart (small distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

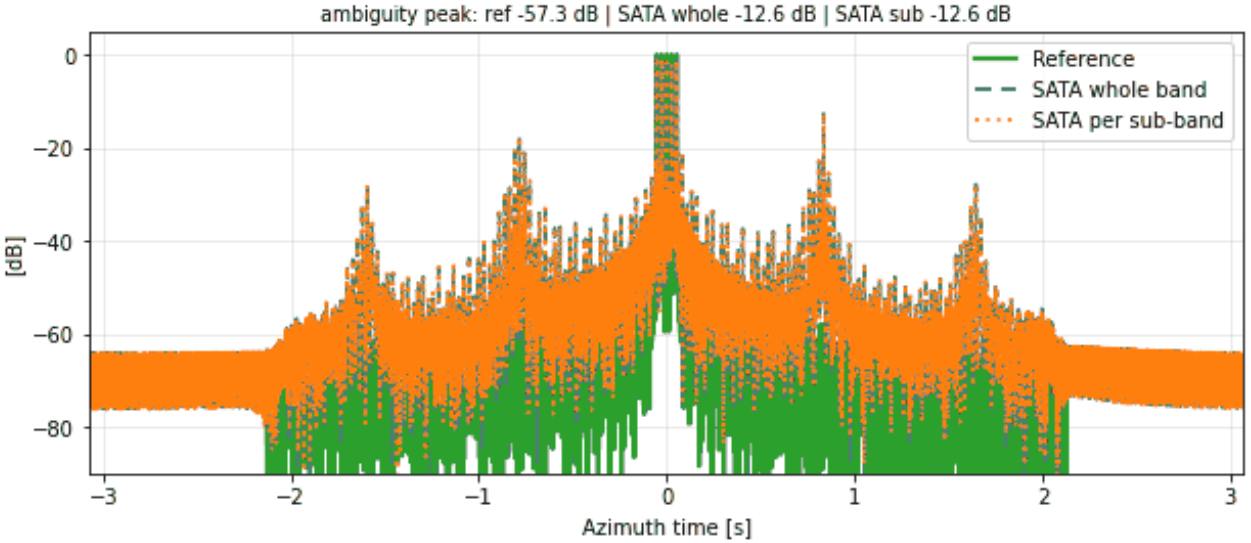

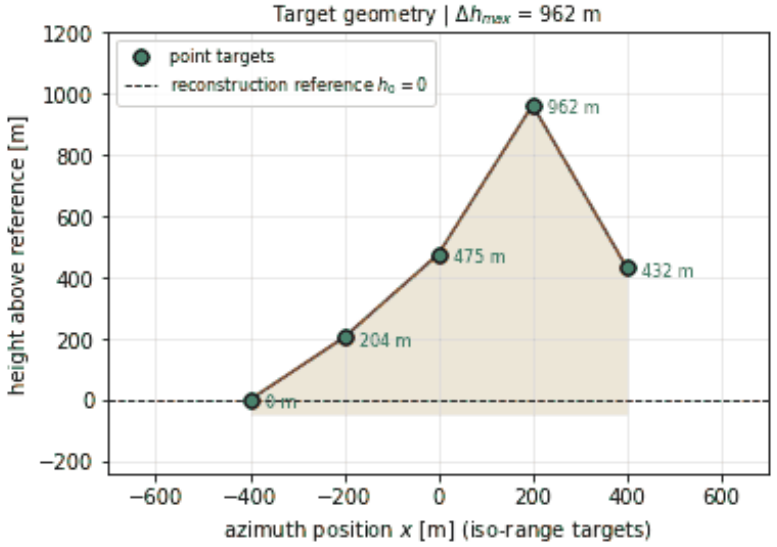


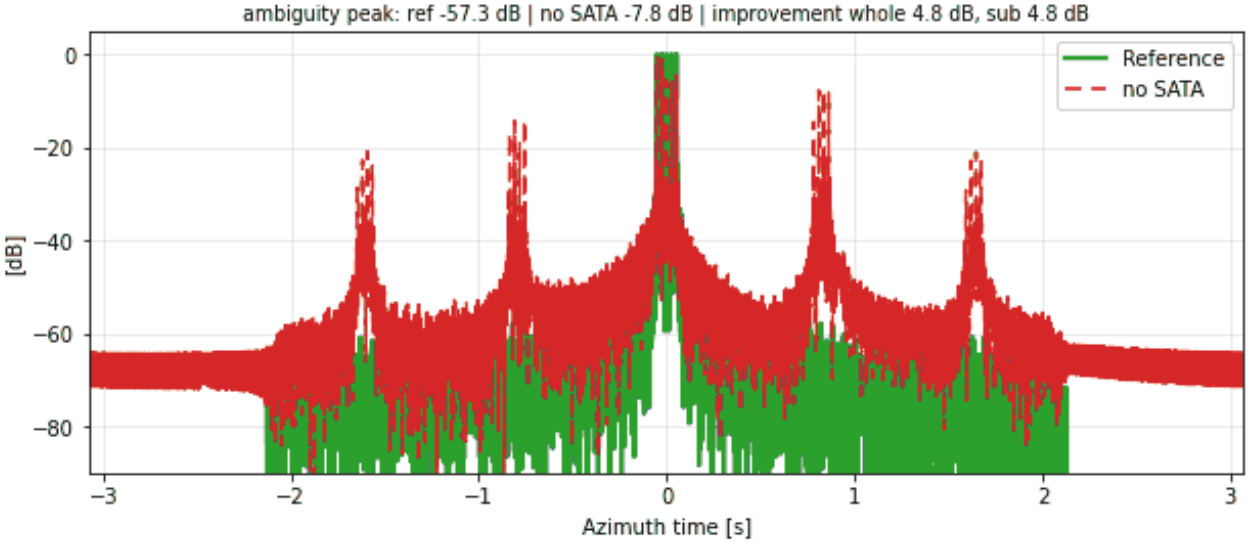


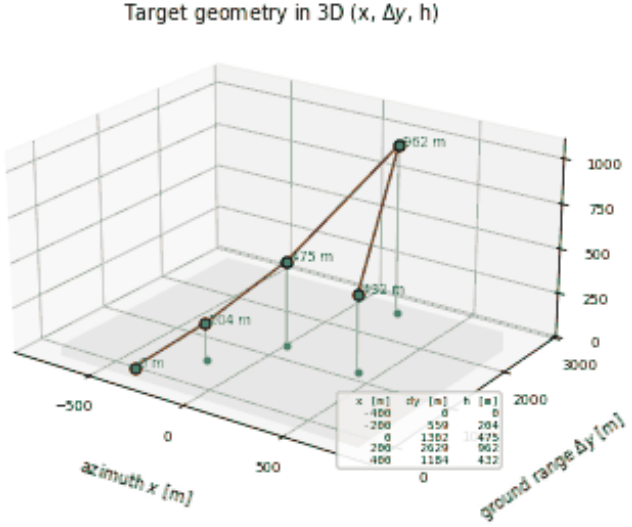



RH-SN-007 | SATA 1D | random heights: N = 9, heights $\sim U(0, 100)$ m, seed 0, targets 200 m apart (small distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

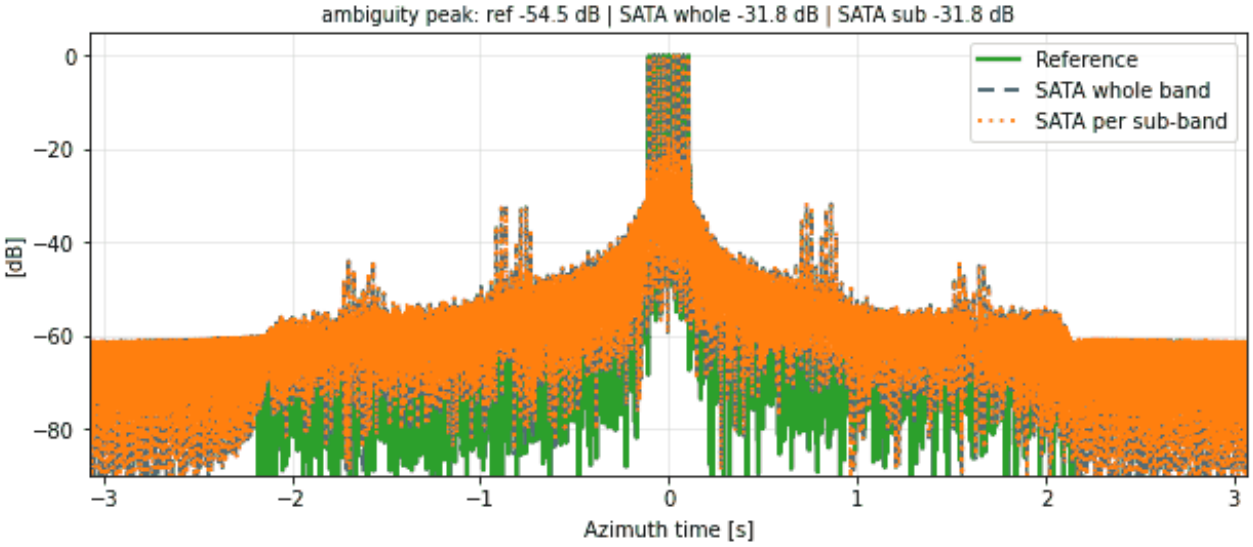

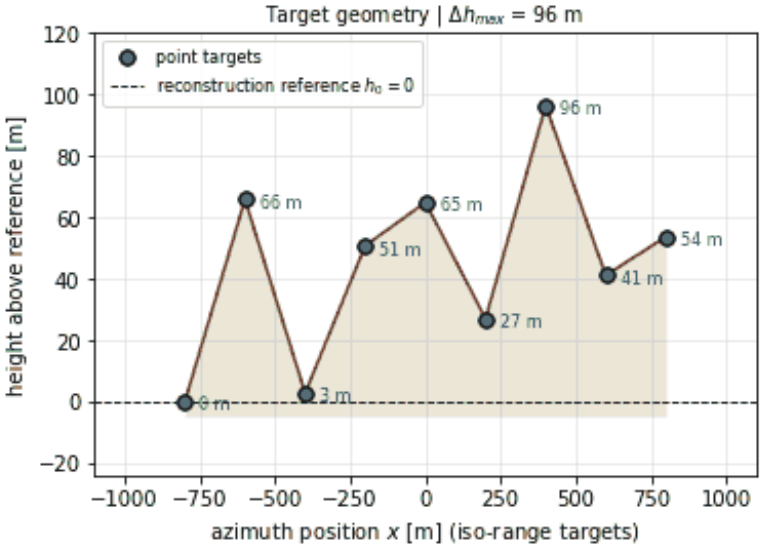


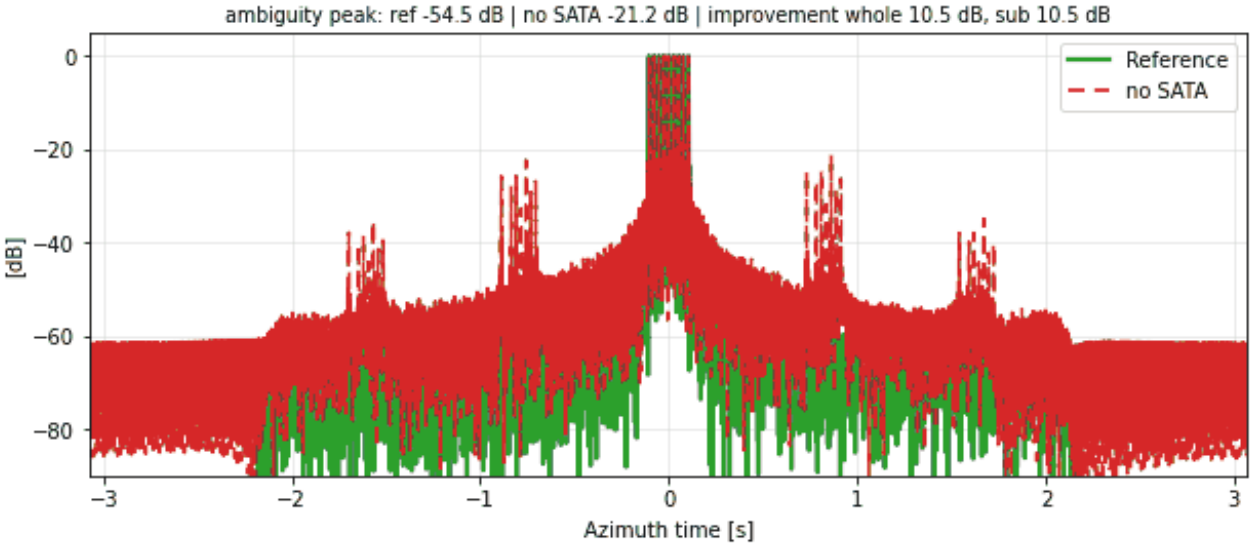


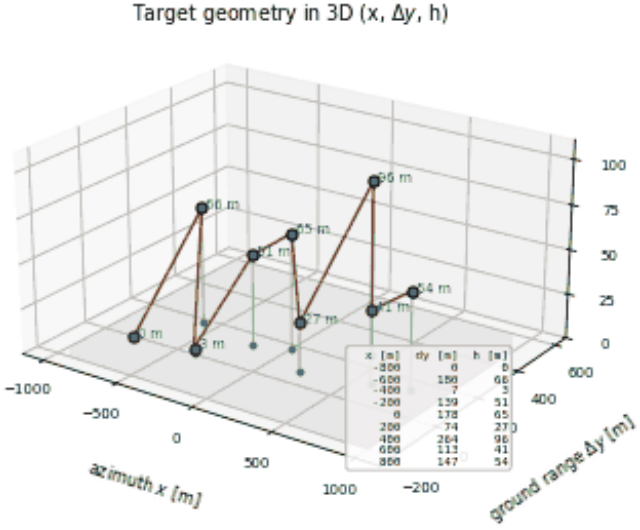



RH-SN-008 | SATA 1D | random heights: N = 9, heights $\sim U(0, 100)$ m, seed 1, targets 200 m apart (small distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

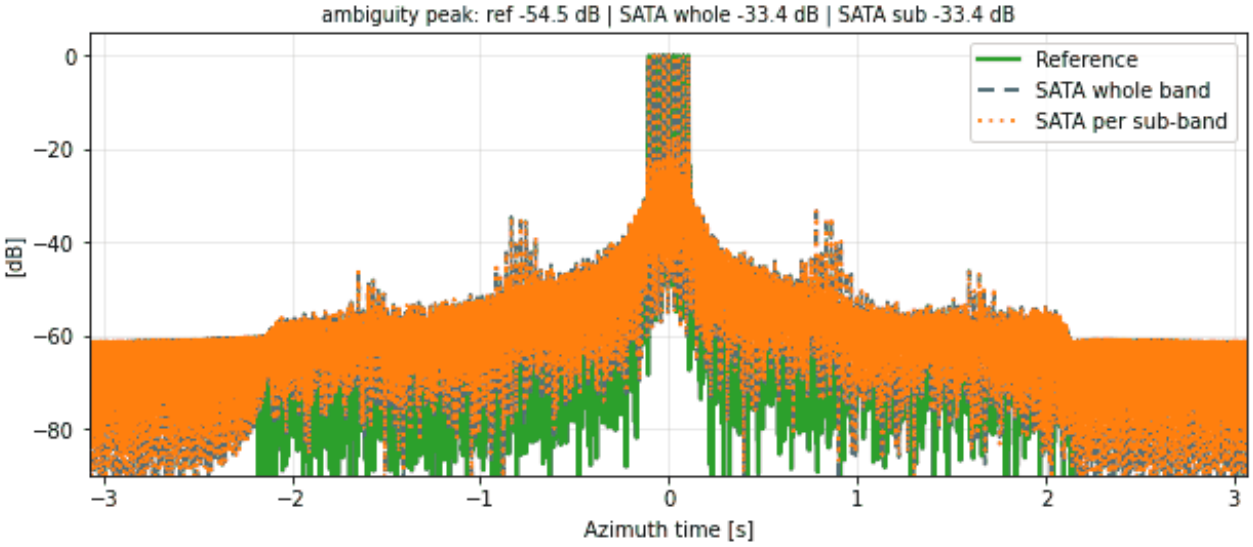


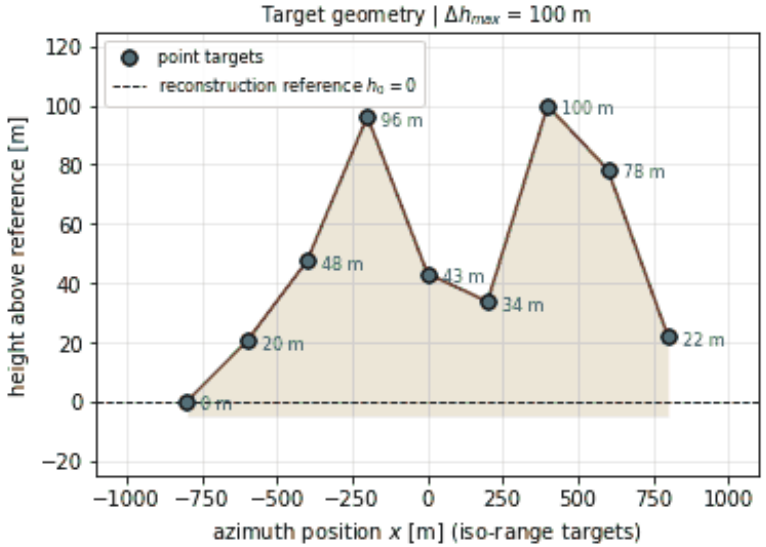


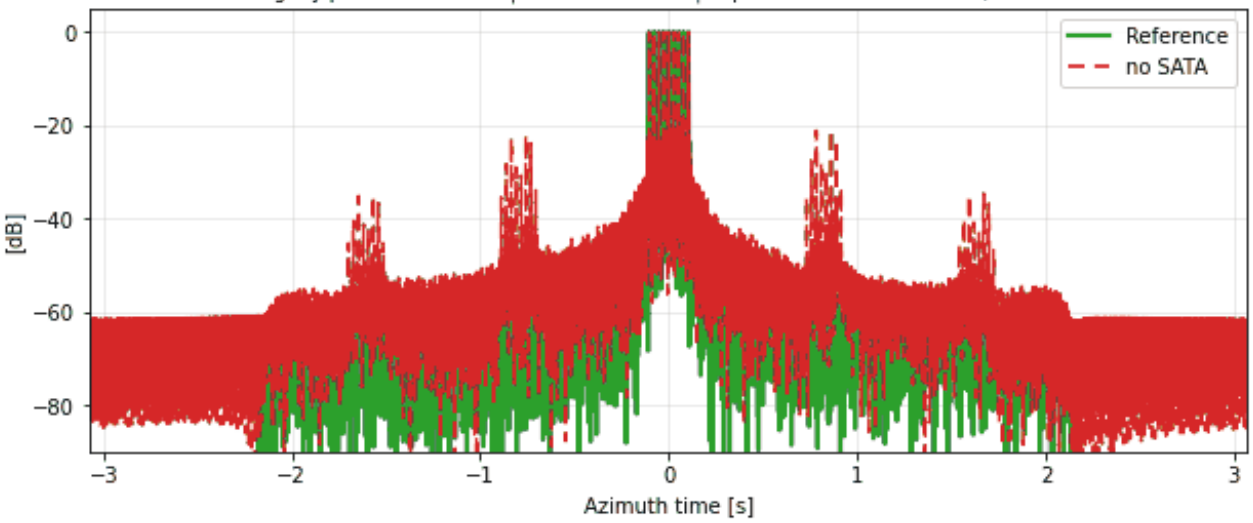


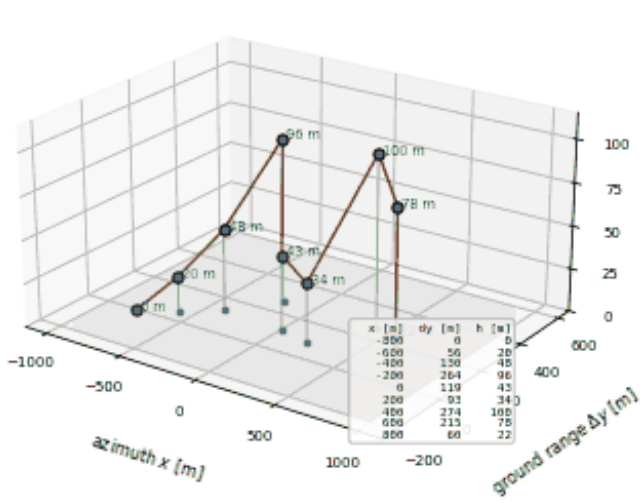


RH-SN-009 | SATA 1D | random heights: N = 9, heights $\sim U(0, 500)$ m, seed 0, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

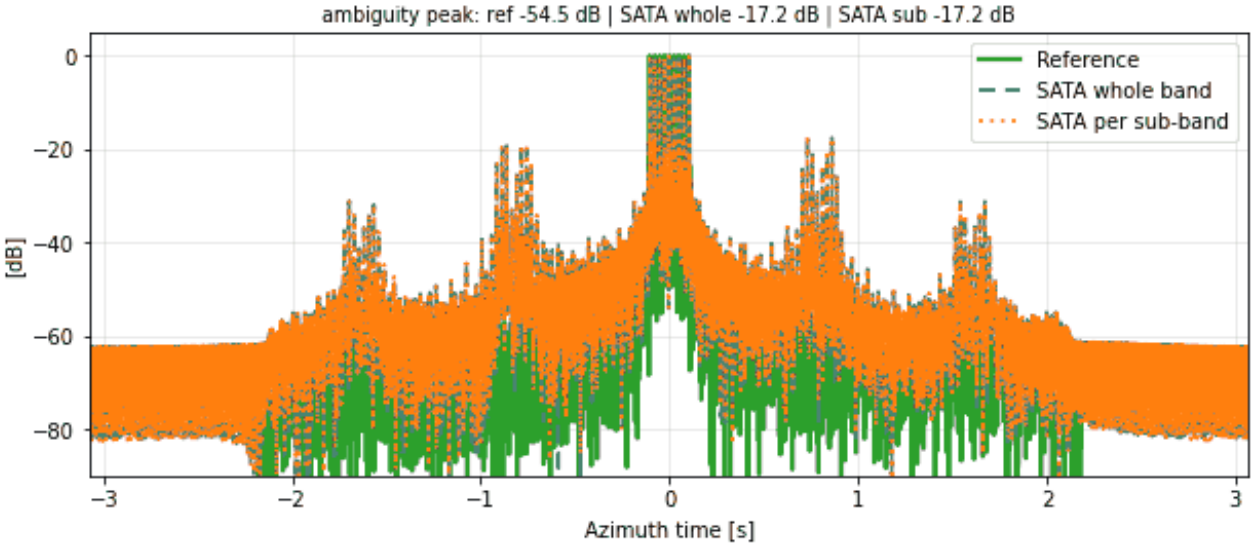


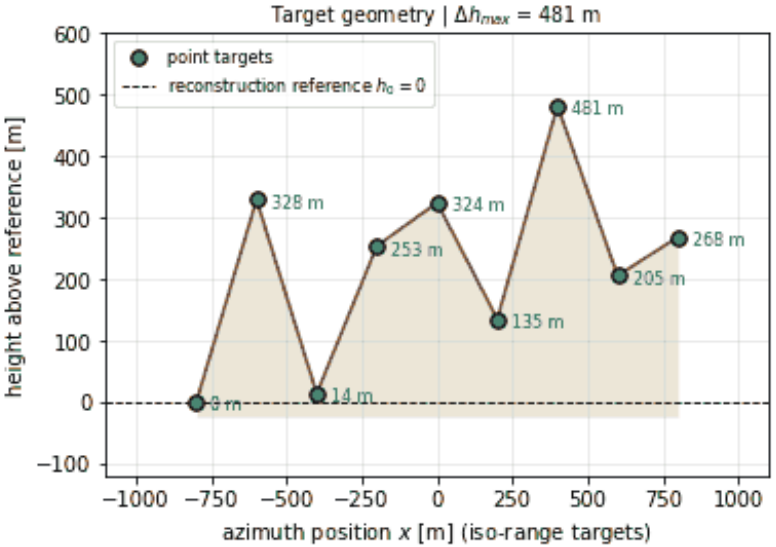


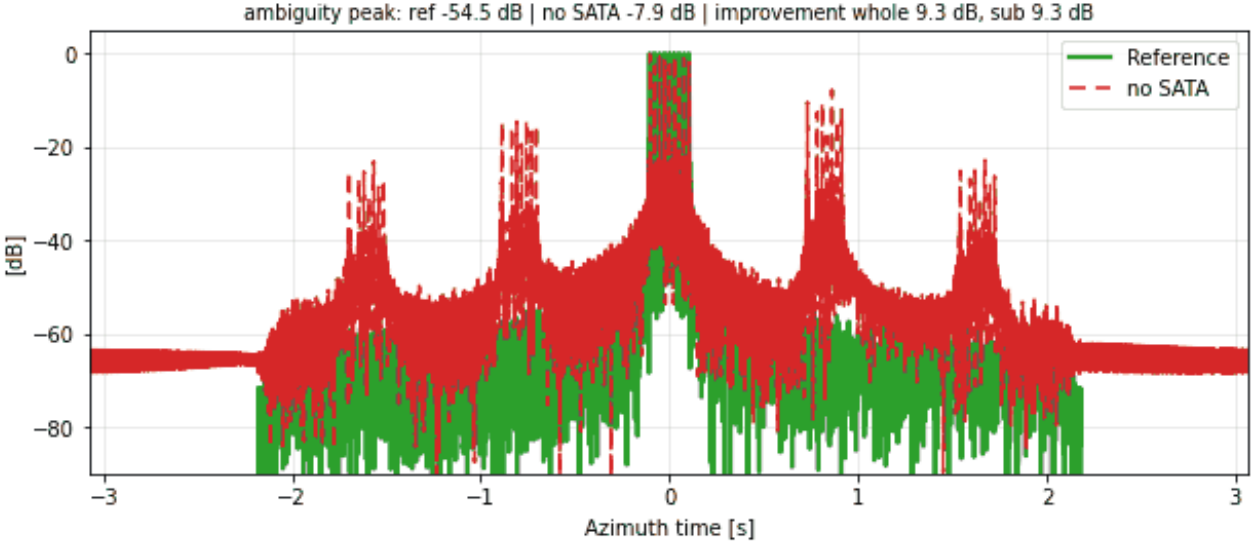


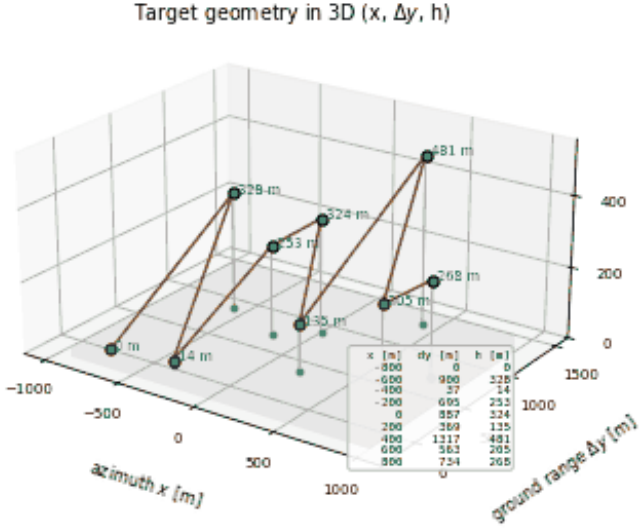


RH-SN-010 | SATA 1D | random heights: N = 9, heights $\sim U(0, 500)$ m, seed 1, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

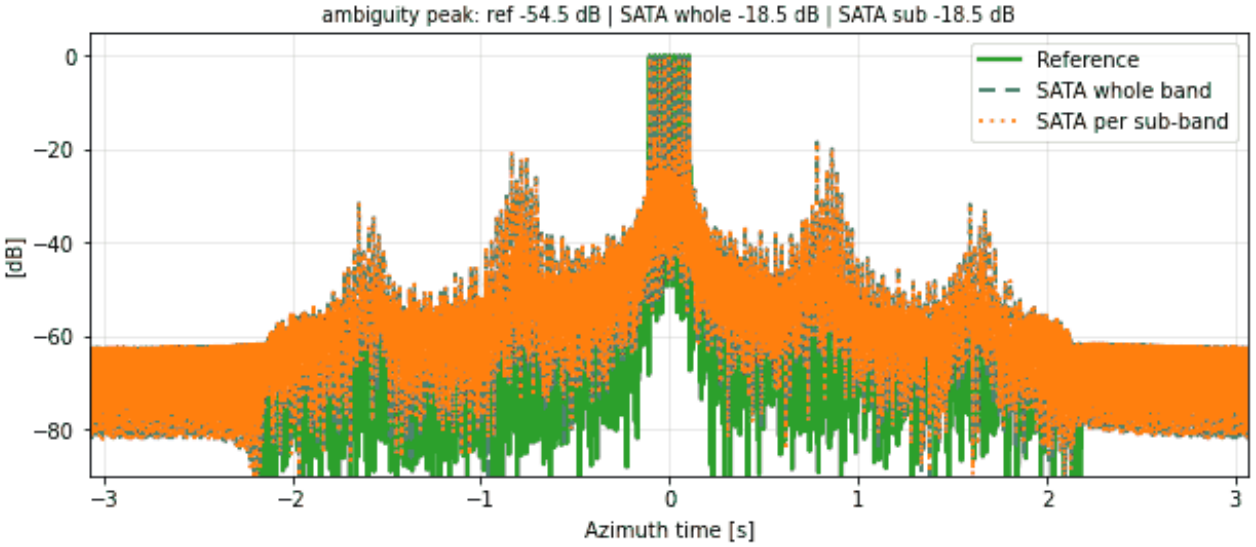

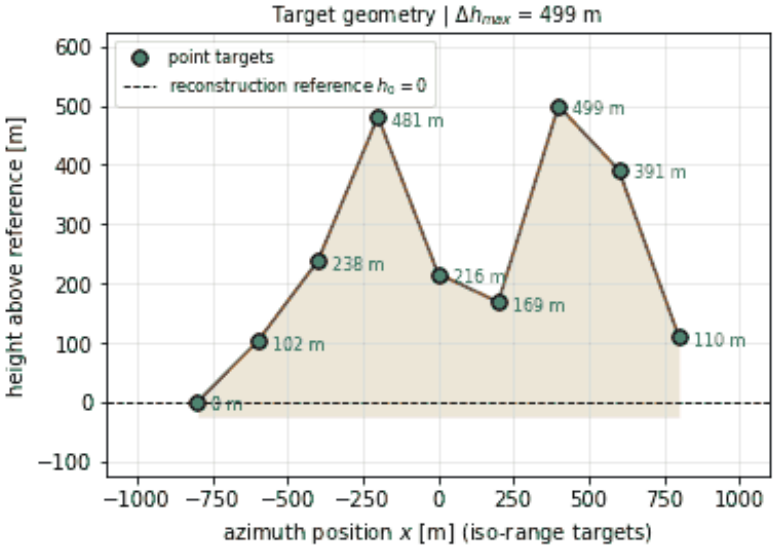


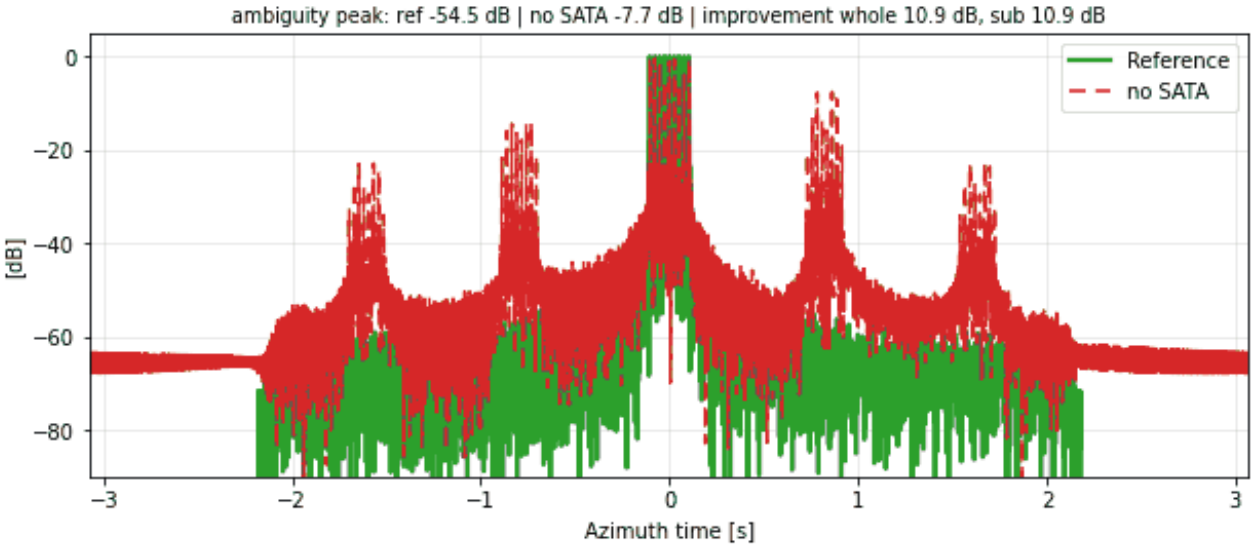


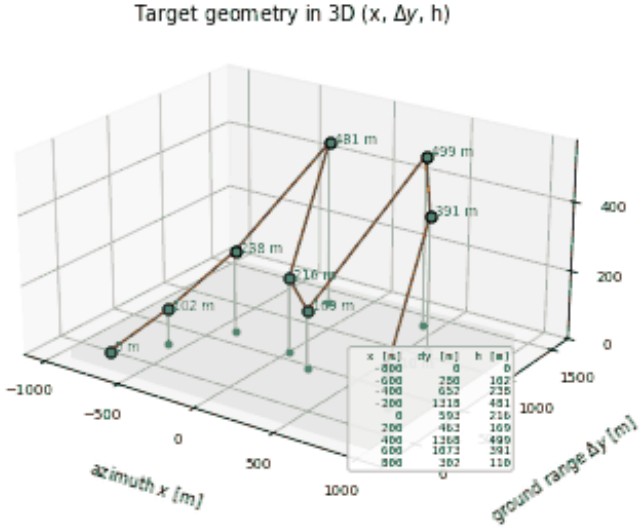



RH-SN-011 | SATA 1D | random heights: N = 9, heights $\sim U(0, 1000)$ m, seed 0, targets 200 m apart (small distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

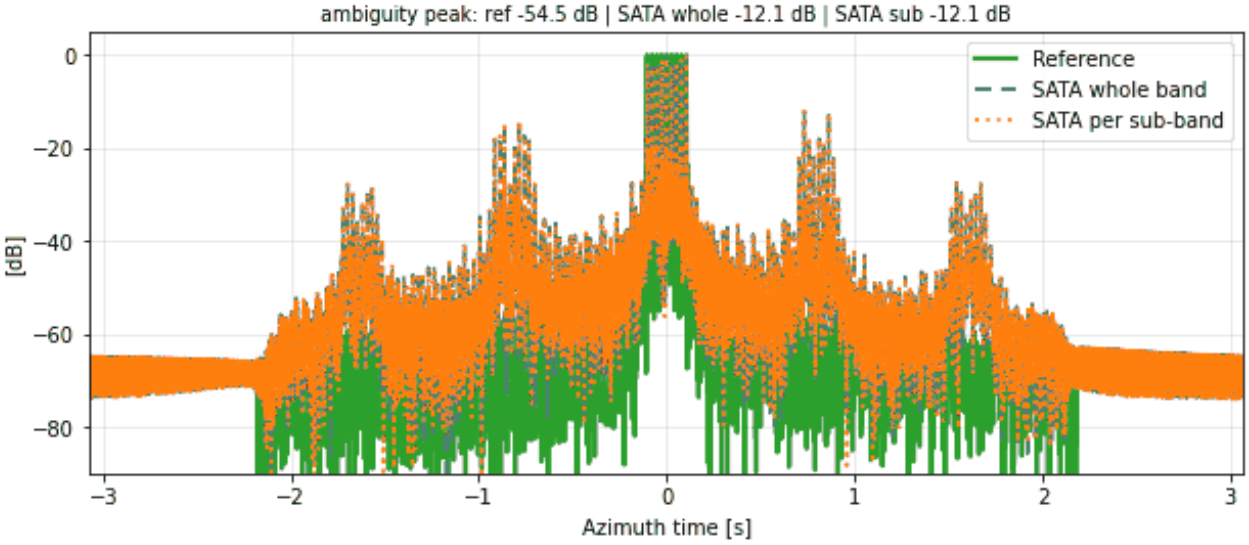

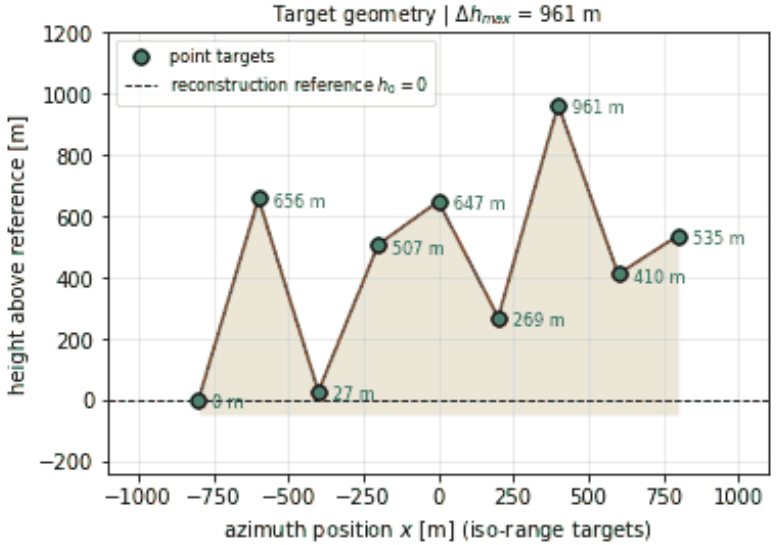


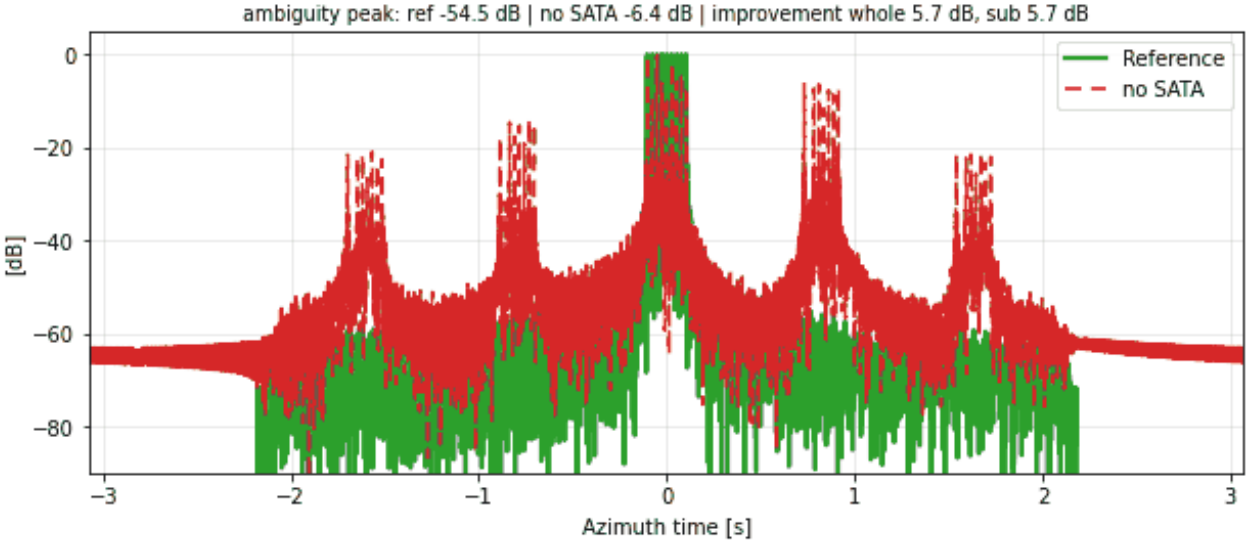


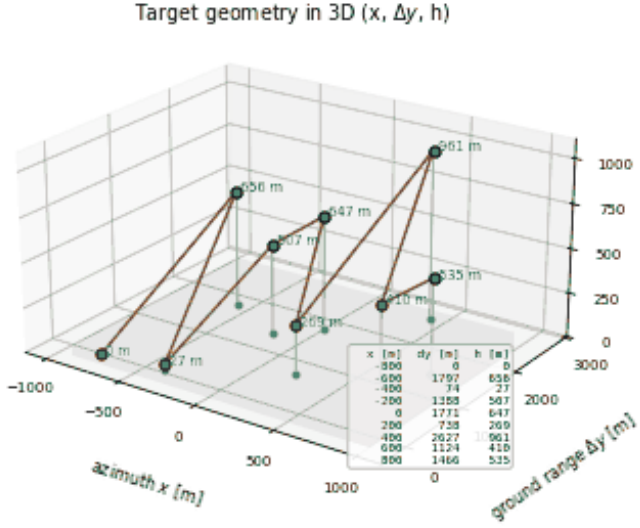



RH-SN-012 | SATA 1D | random heights: N = 9, heights $\sim U(0, 1000)$ m, seed 1, targets 200 m apart (small distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

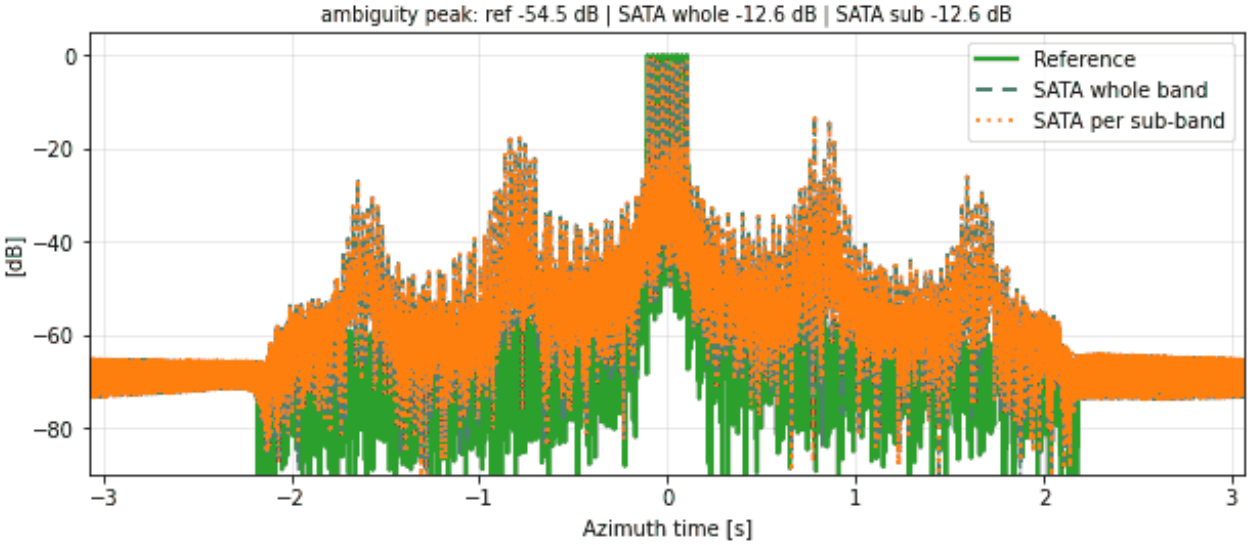

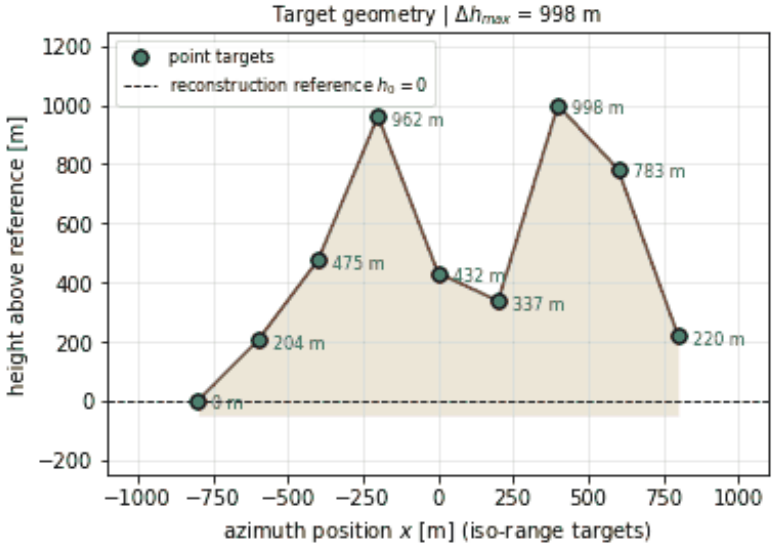


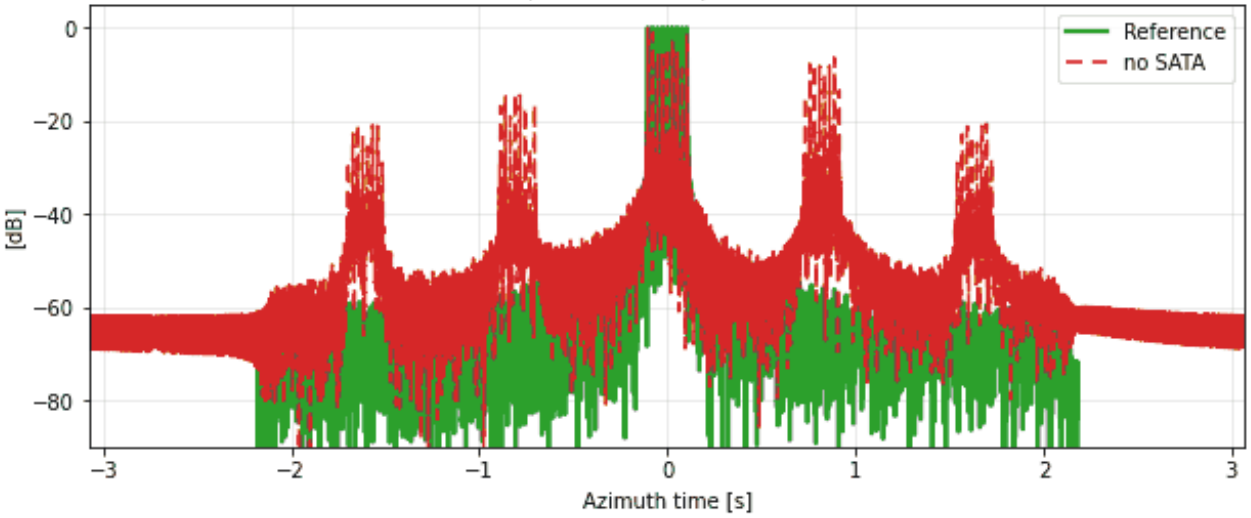


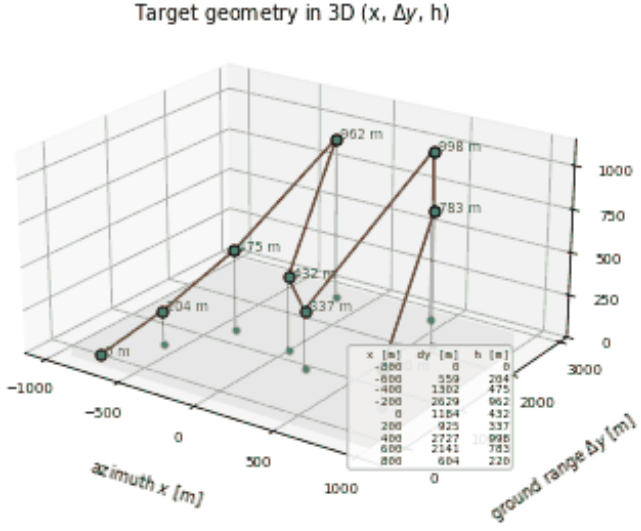



RH-SN-013 | SATA 1D | random heights: N = 13, heights $\sim U(0, 100)$ m, seed 0, targets 200 m apart (small distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

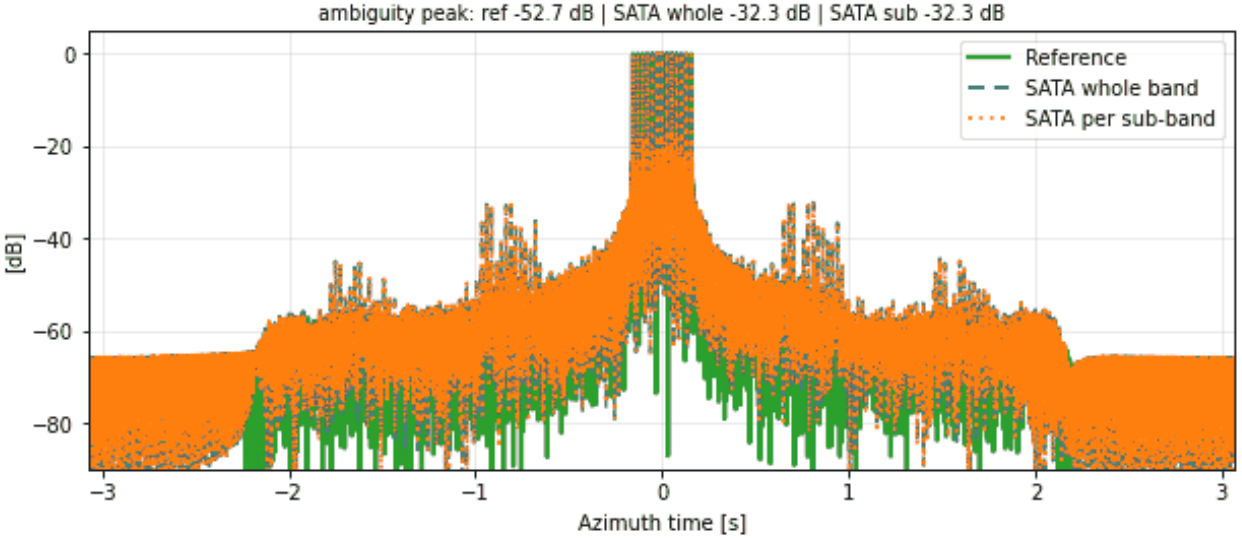

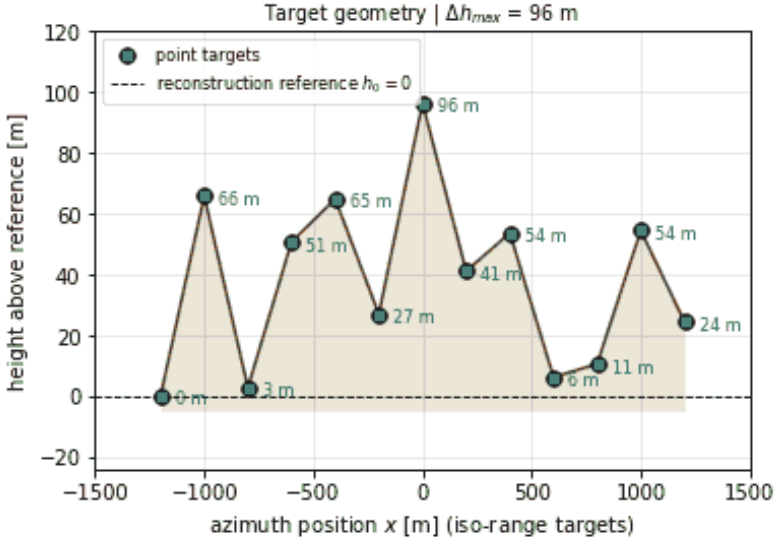


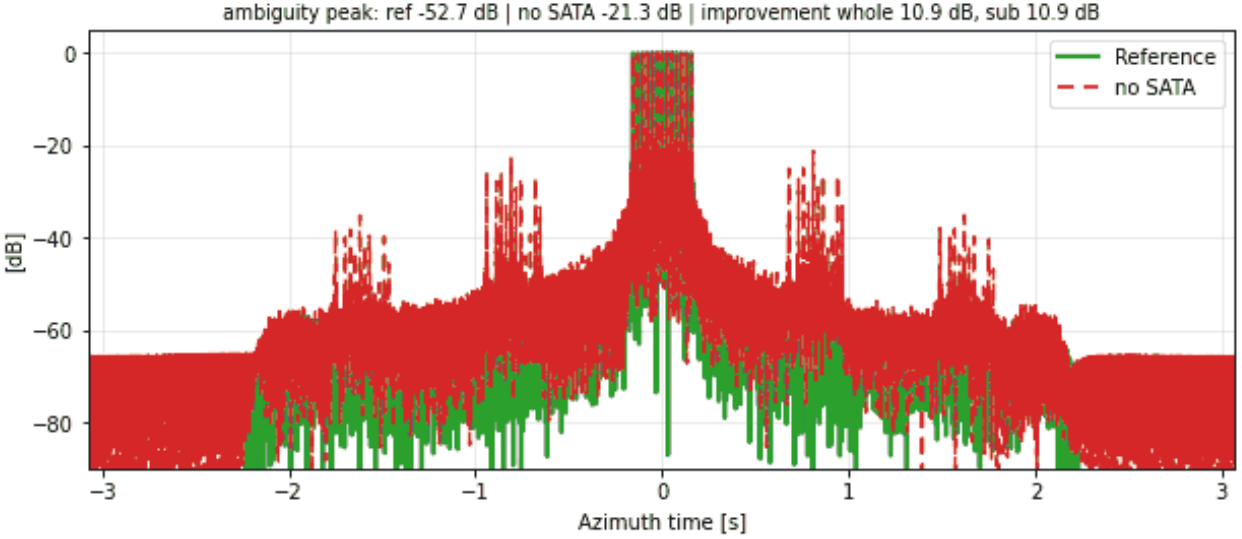


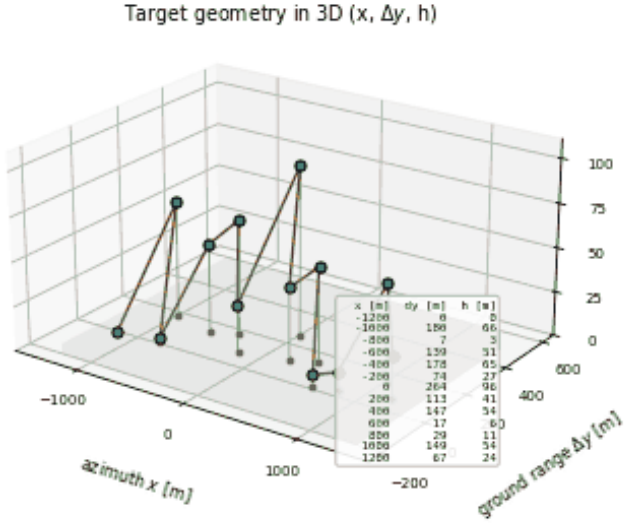



RH-SN-014 | SATA 1D | random heights: N = 13, heights $\sim U(0, 100)$ m, seed 1, targets 200 m apart (small distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

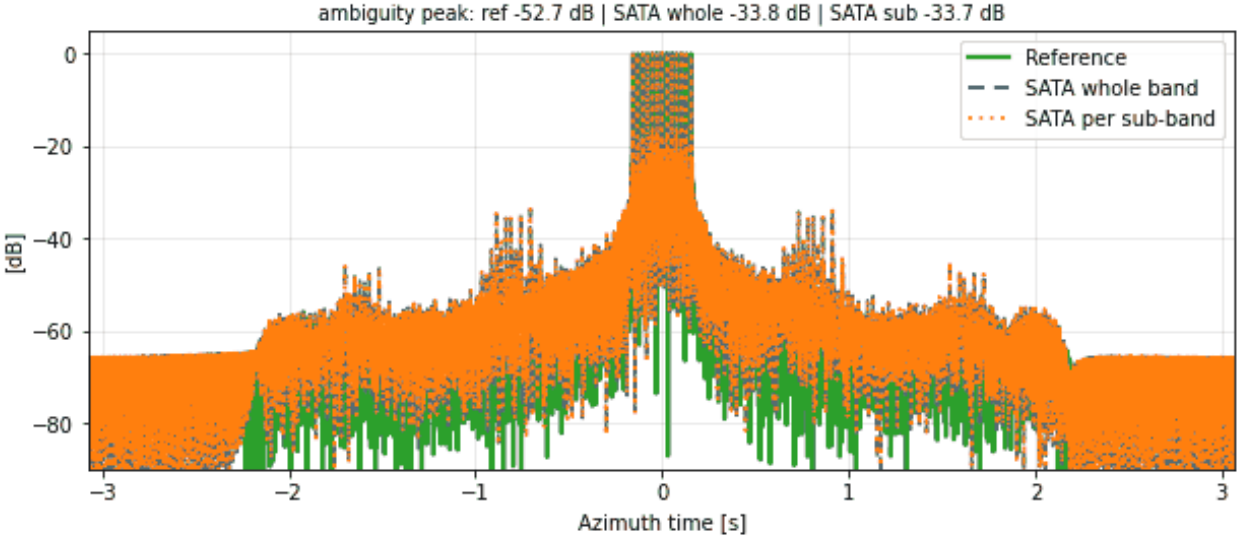


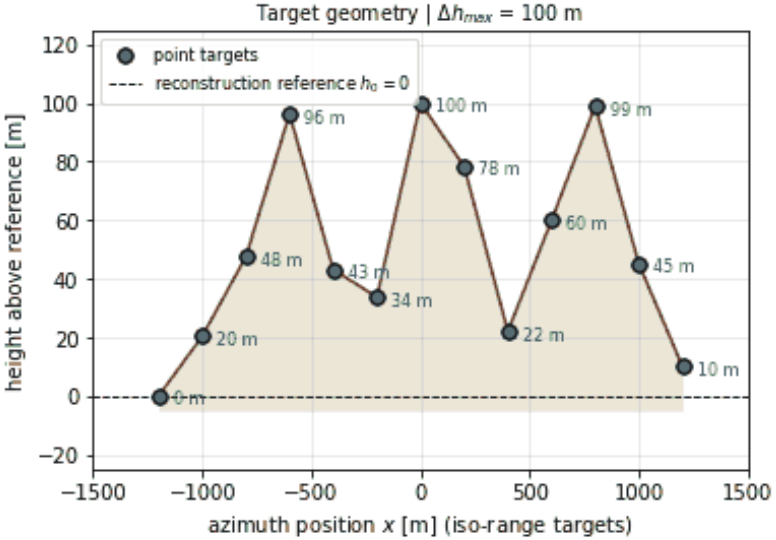


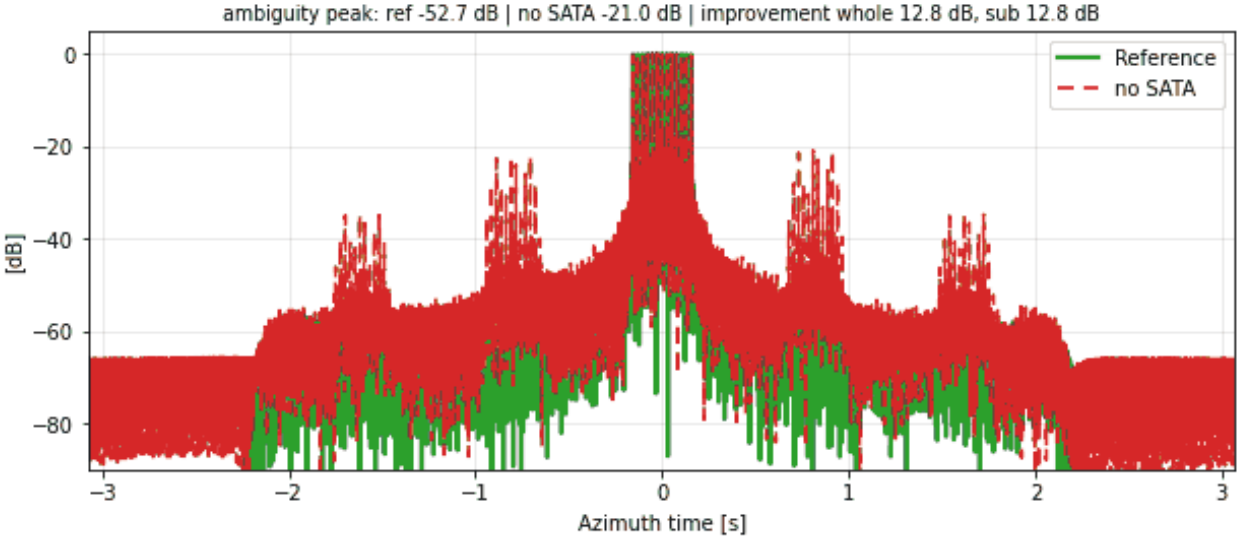


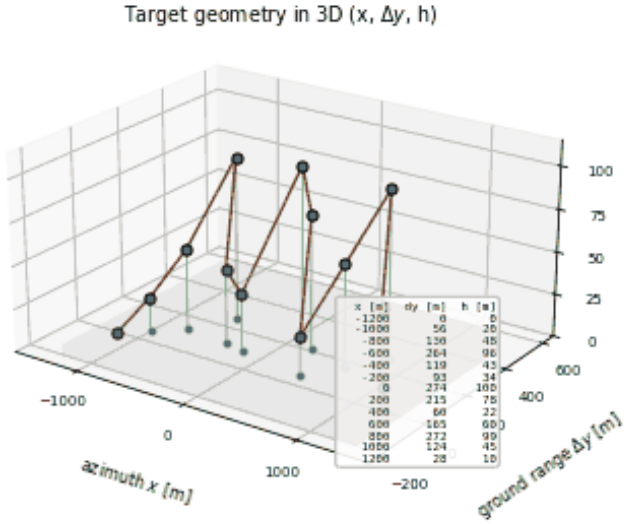


RH-SN-015 | SATA 1D | random heights: N = 13, heights $\sim U(0, 500)$ m, seed 0, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

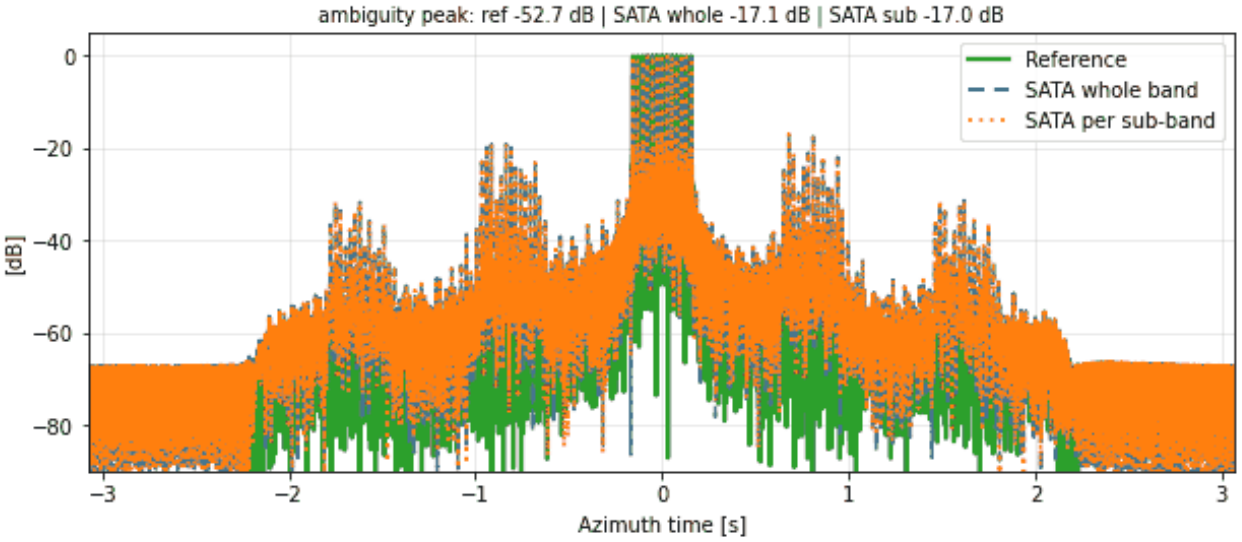

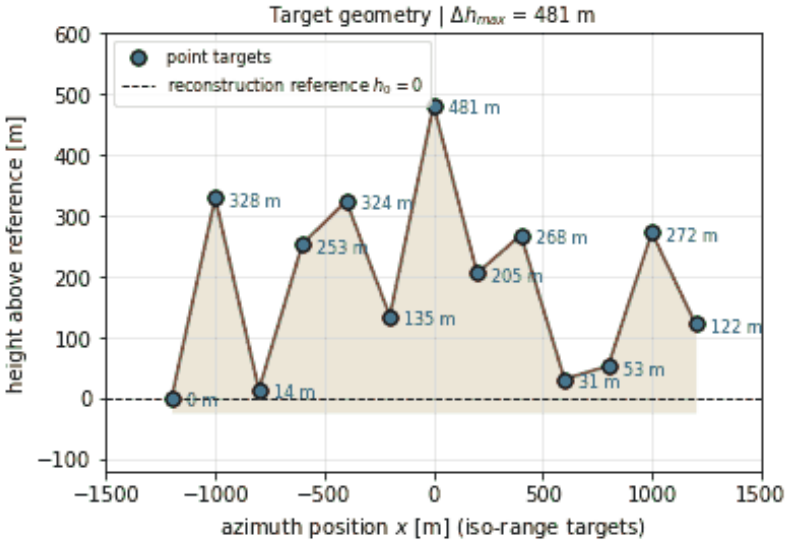


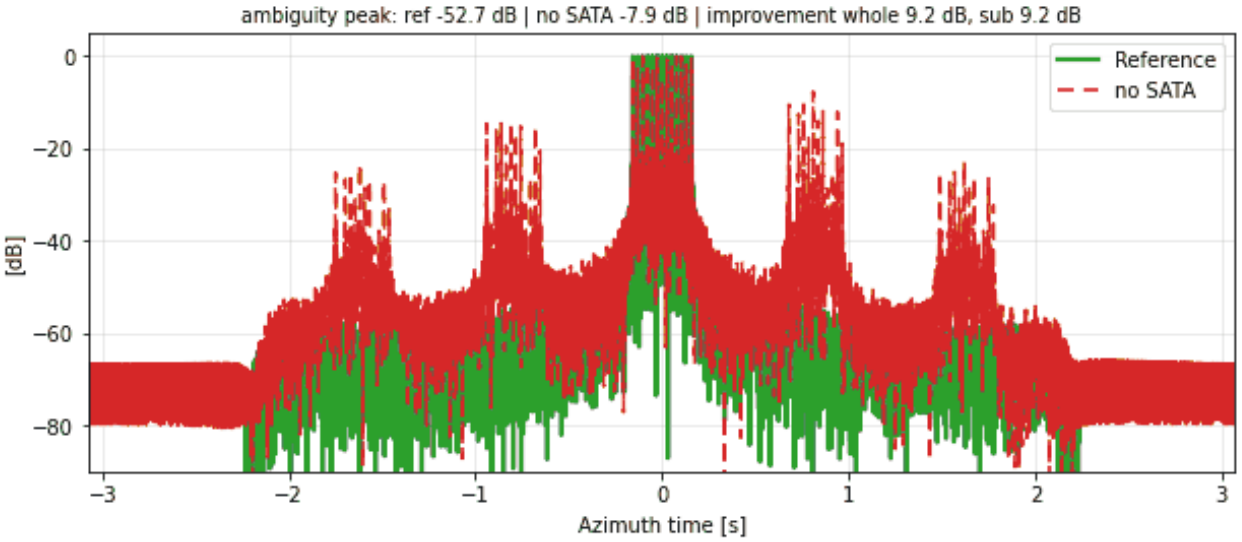


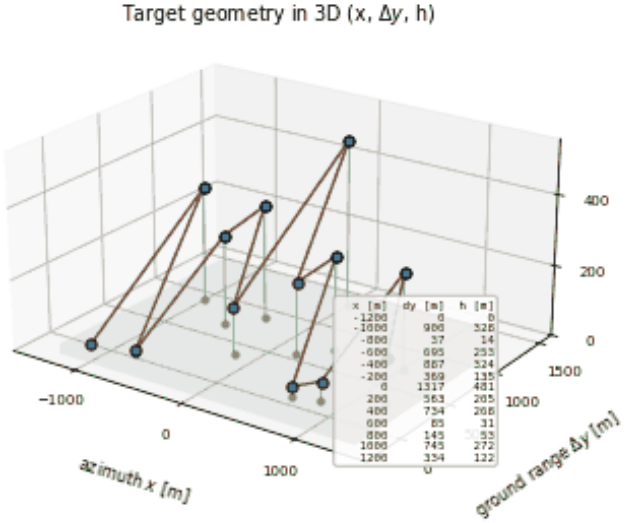



RH-SN-016 | SATA 1D | random heights: N = 13, heights $\sim U(0, 500)$ m, seed 1, targets 200 m apart (small distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

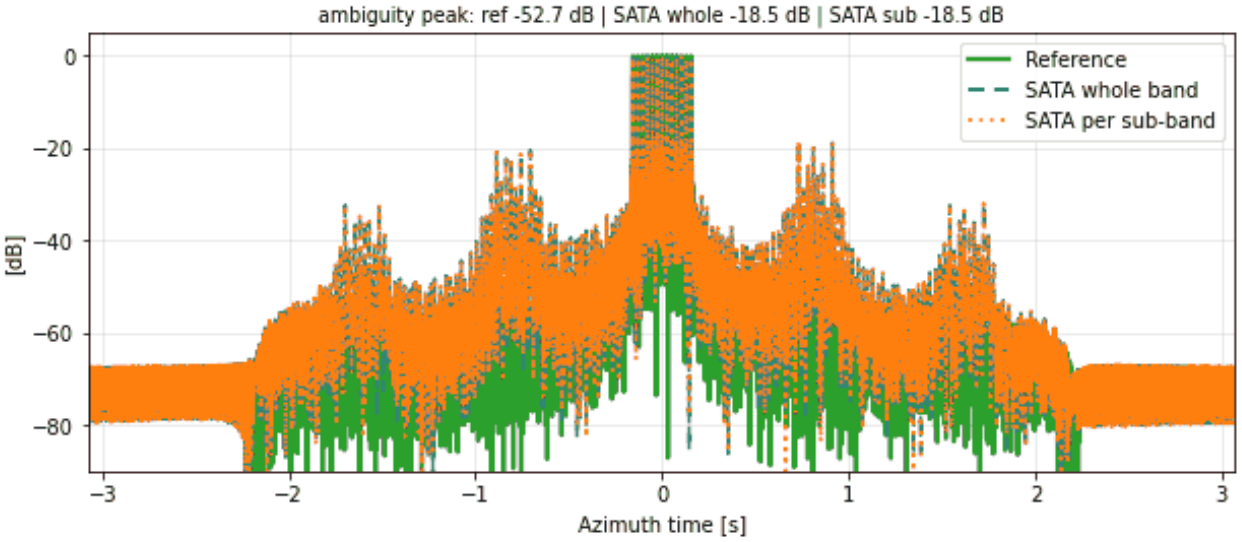

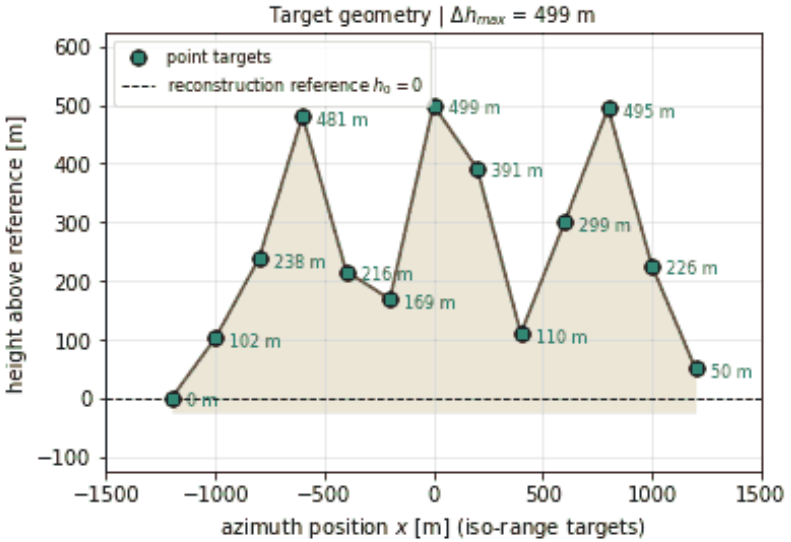


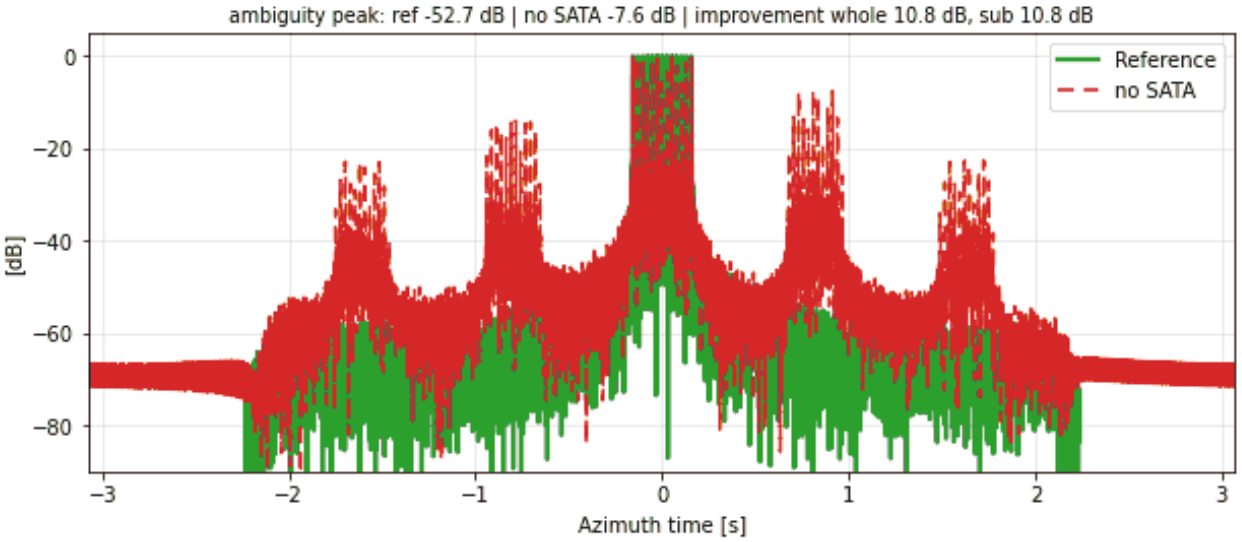


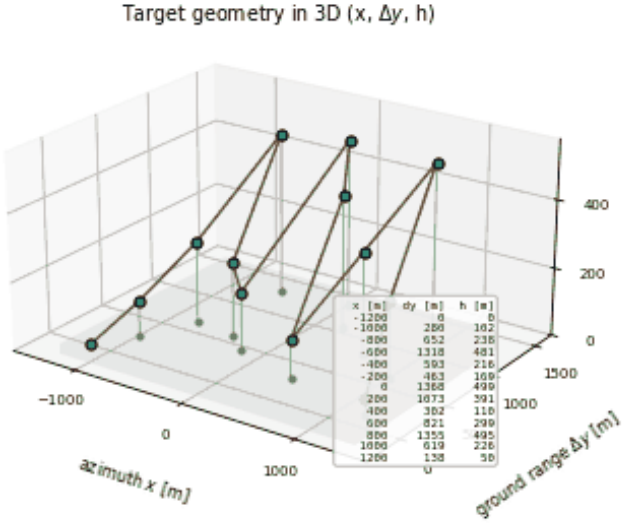



RH-SN-017 | SATA 1D | random heights: N = 13, heights $\sim U(0, 1000)$ m, seed 0, targets 200 m apart (small distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

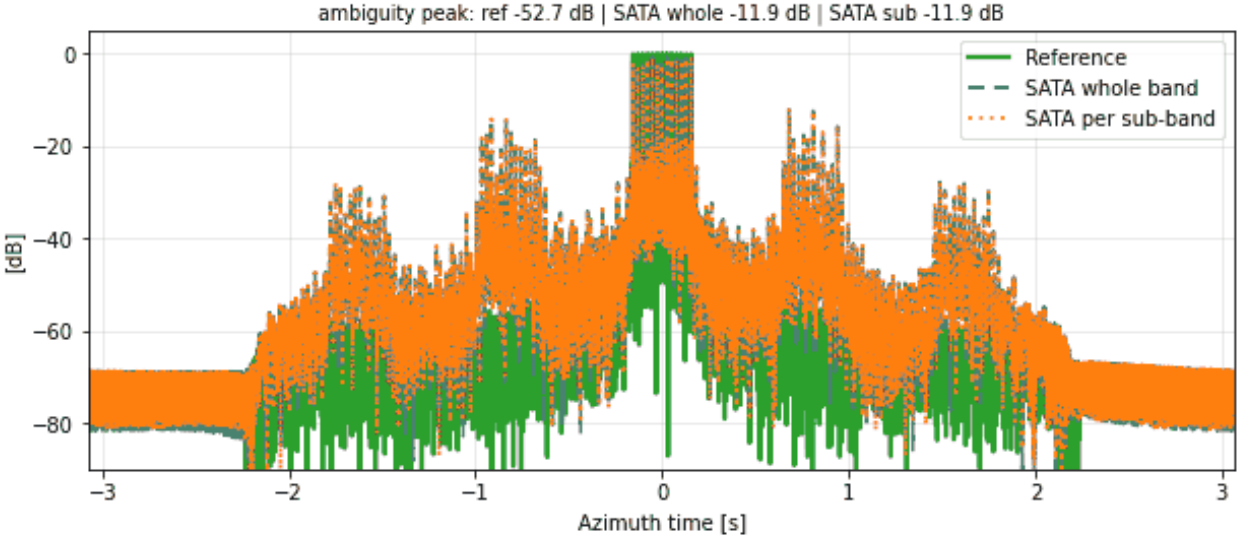


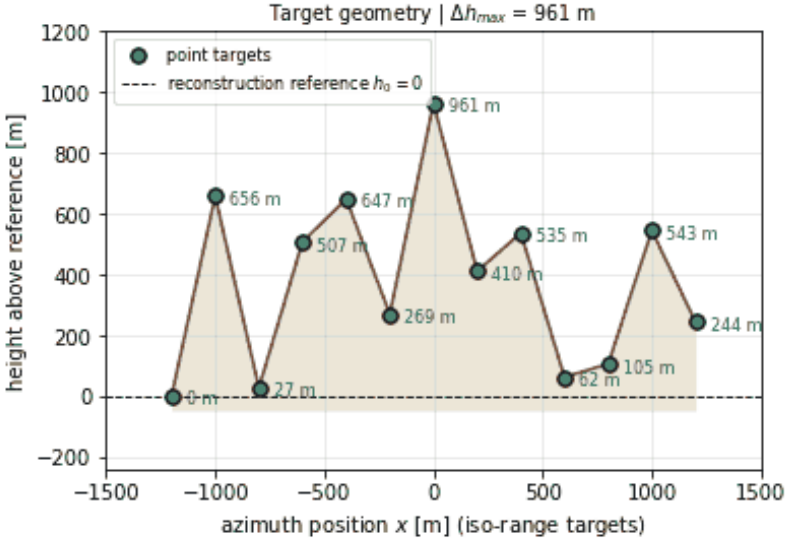


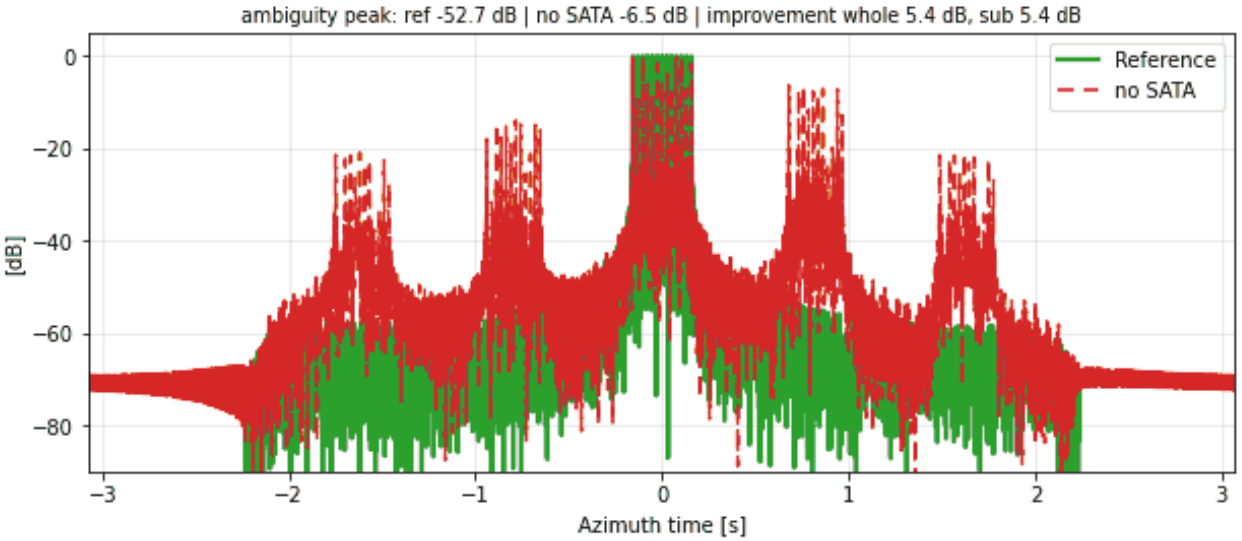


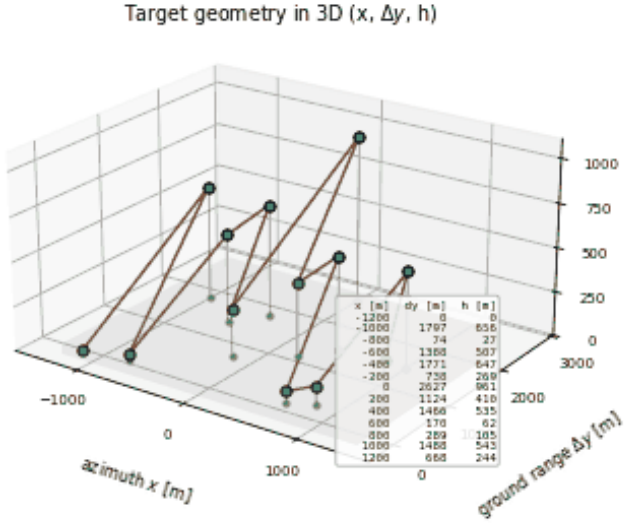


RH-SN-018 | SATA 1D | random heights: N = 13, heights $\sim U(0, 1000)$ m, seed 1, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

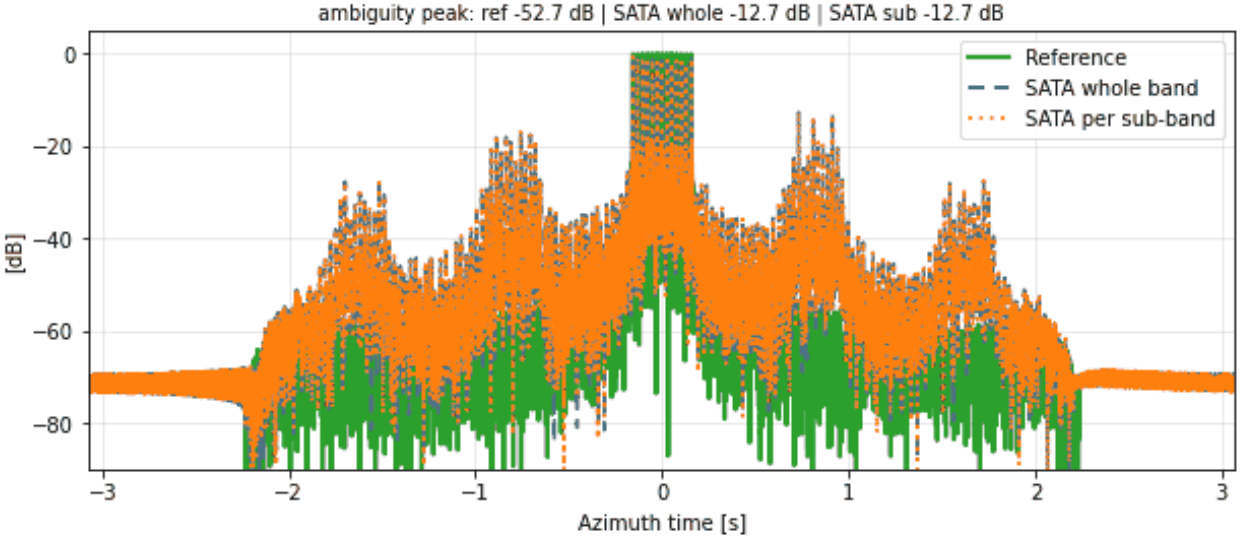

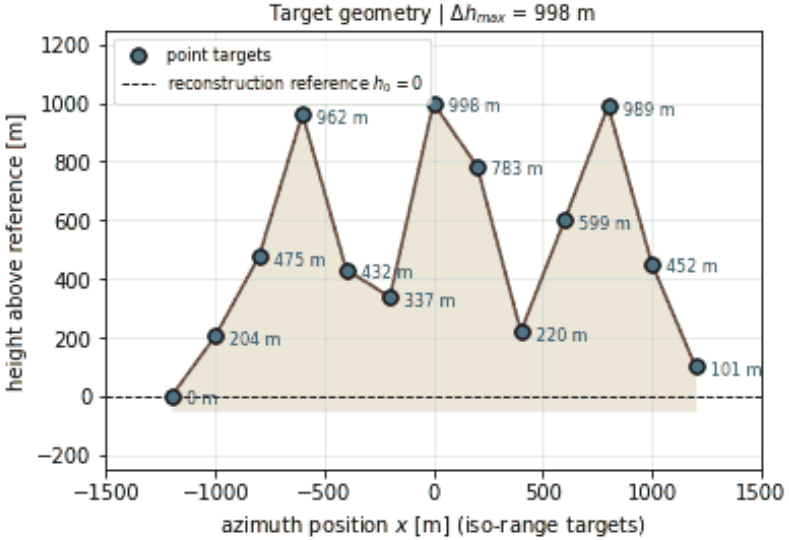


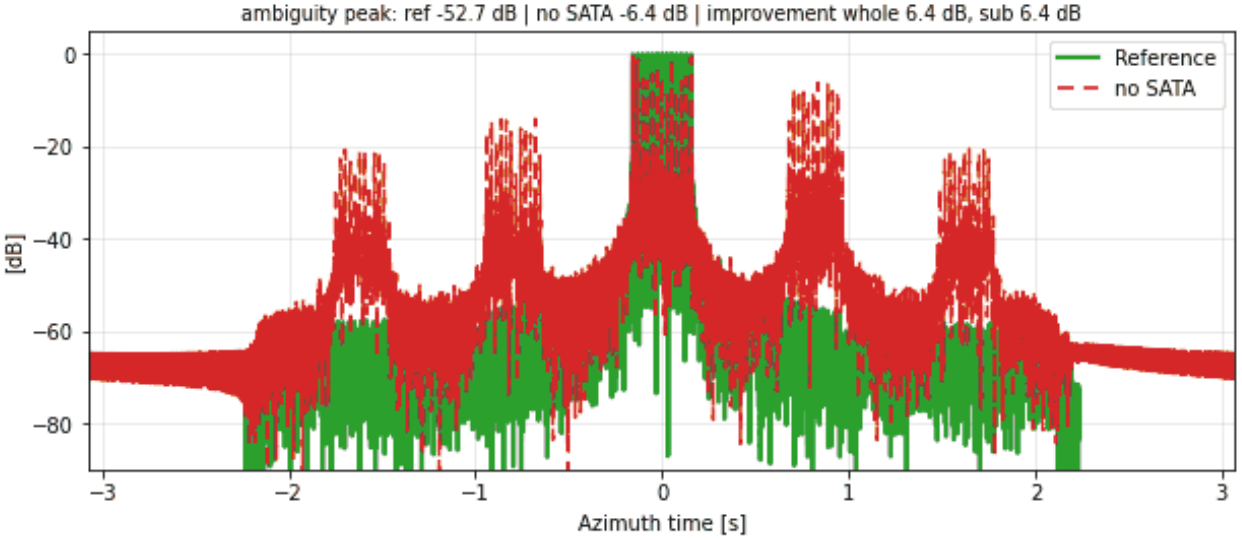


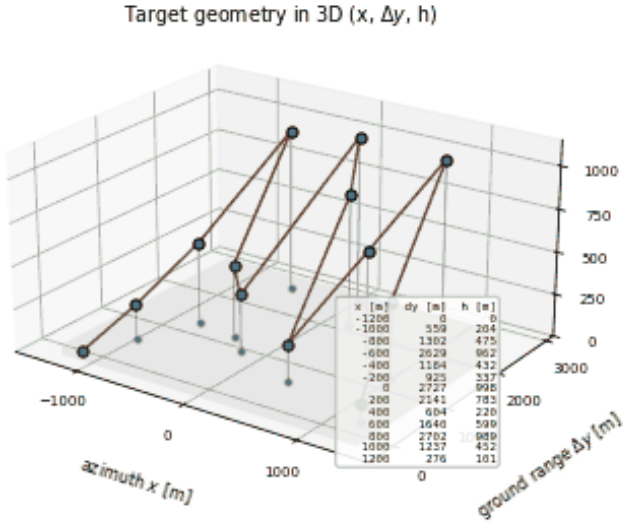



RH-SL-001 | SATA 1D | random heights: N = 5, heights $\sim U(0, 1300)$ m, seed 0, targets 200 m apart (small distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

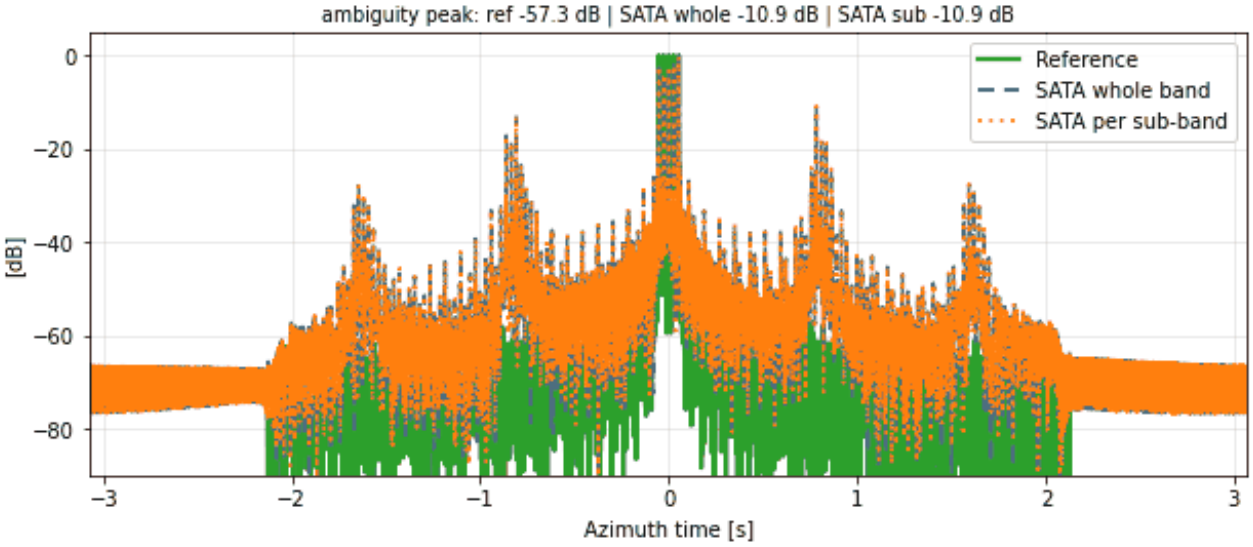

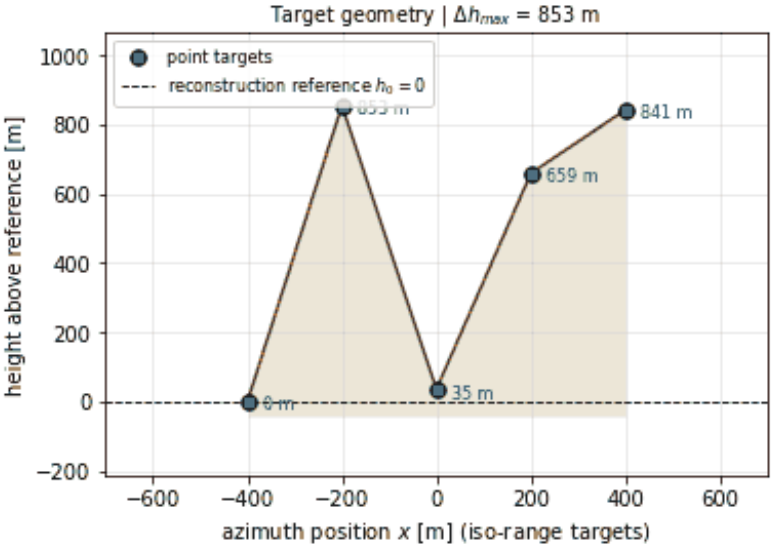


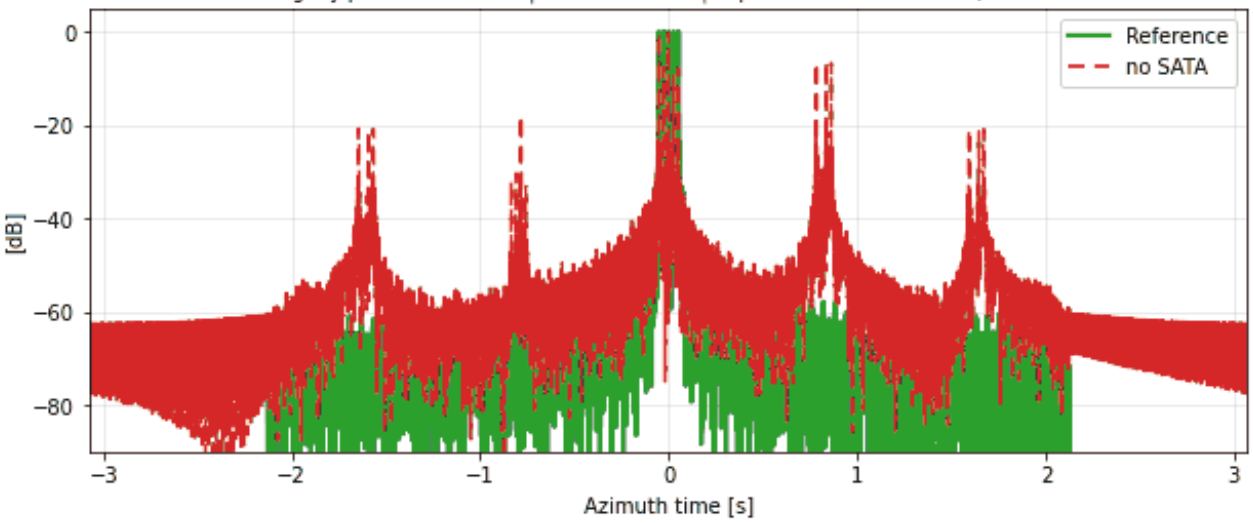


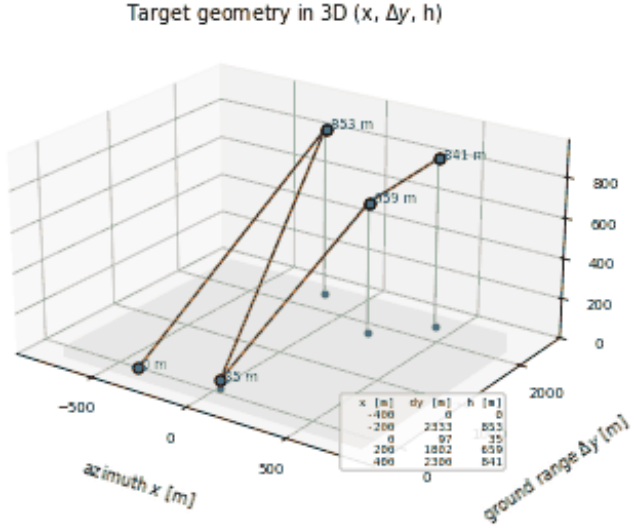



RH-SL-002 | SATA 1D | random heights: N = 5, heights ~$U(0,1300)$ m, seed 1, targets 200 m apart (small distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

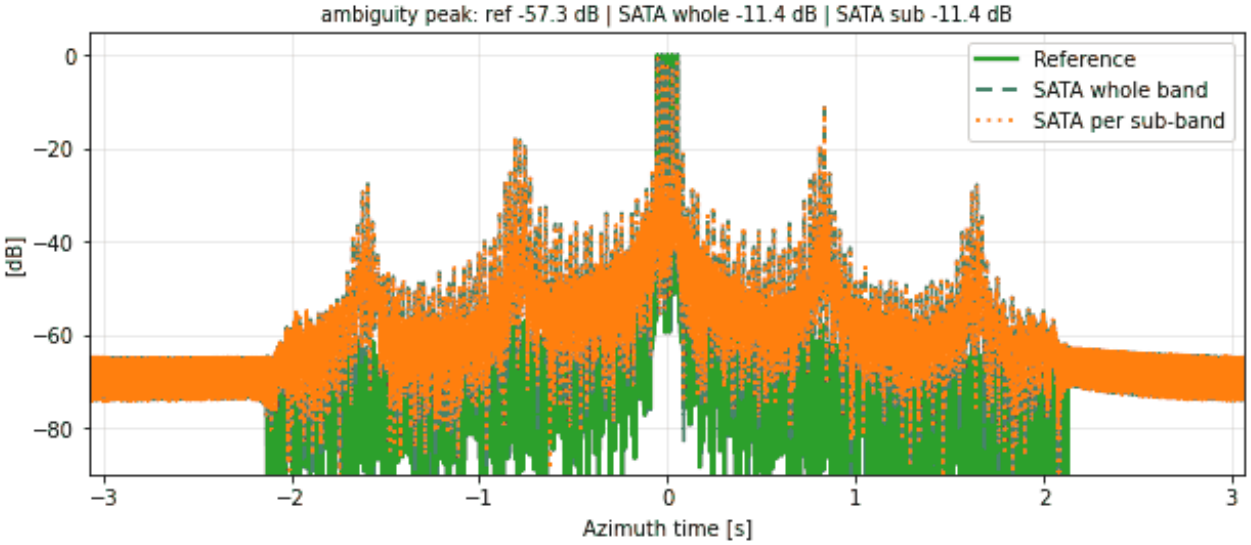


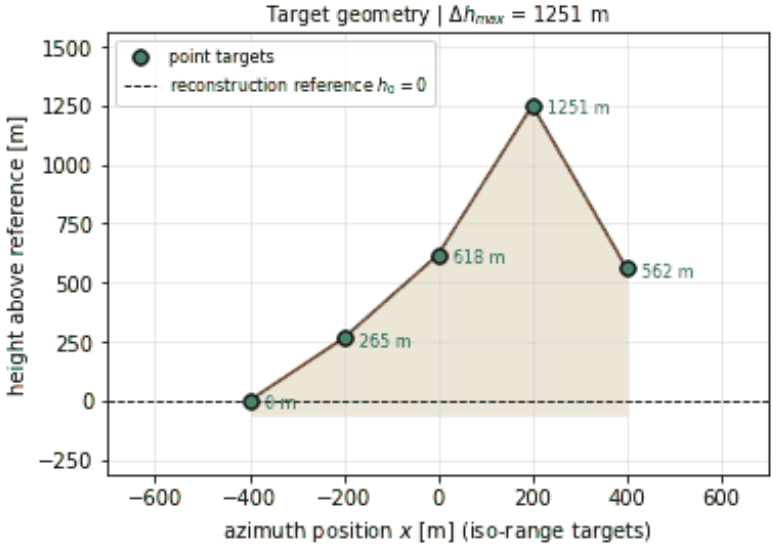


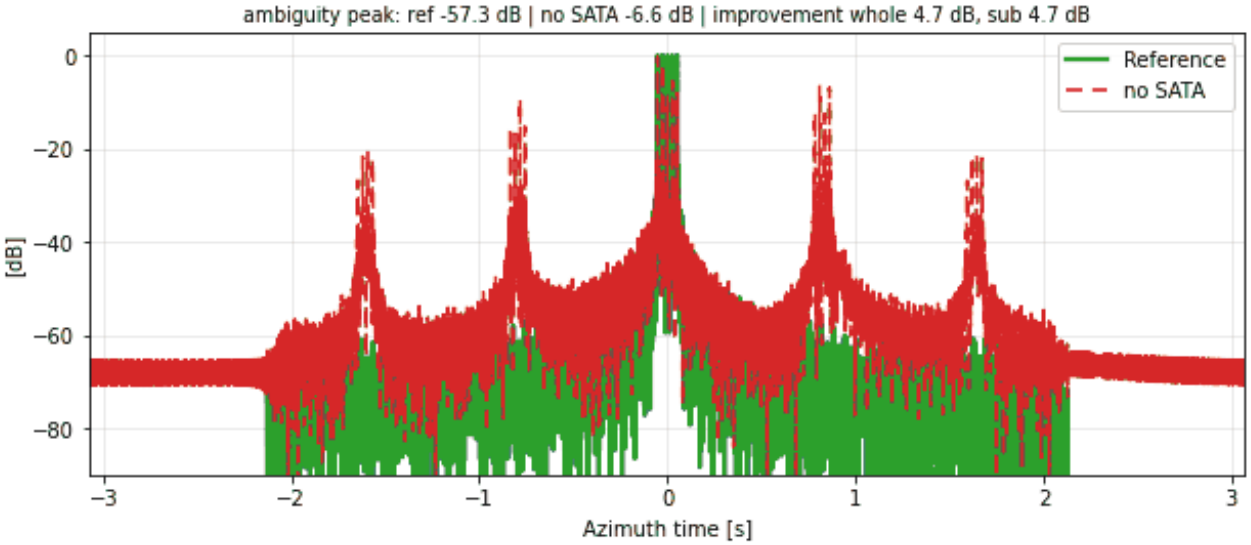

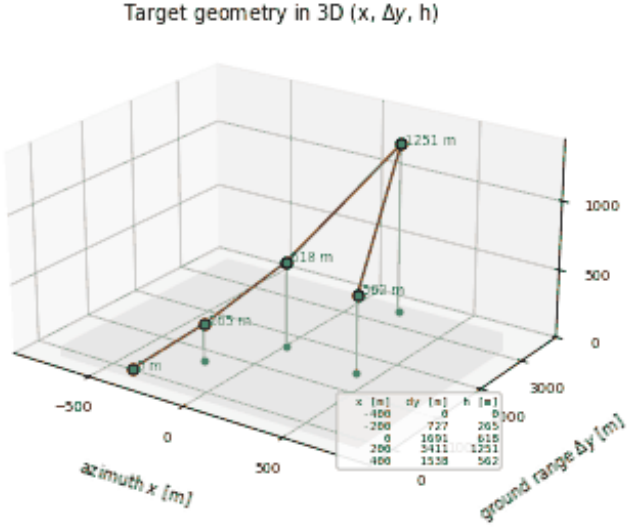


RH-SL-003 | SATA 1D | random heights: N = 5, heights $\sim U(0, 6500)$ m, seed 0, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

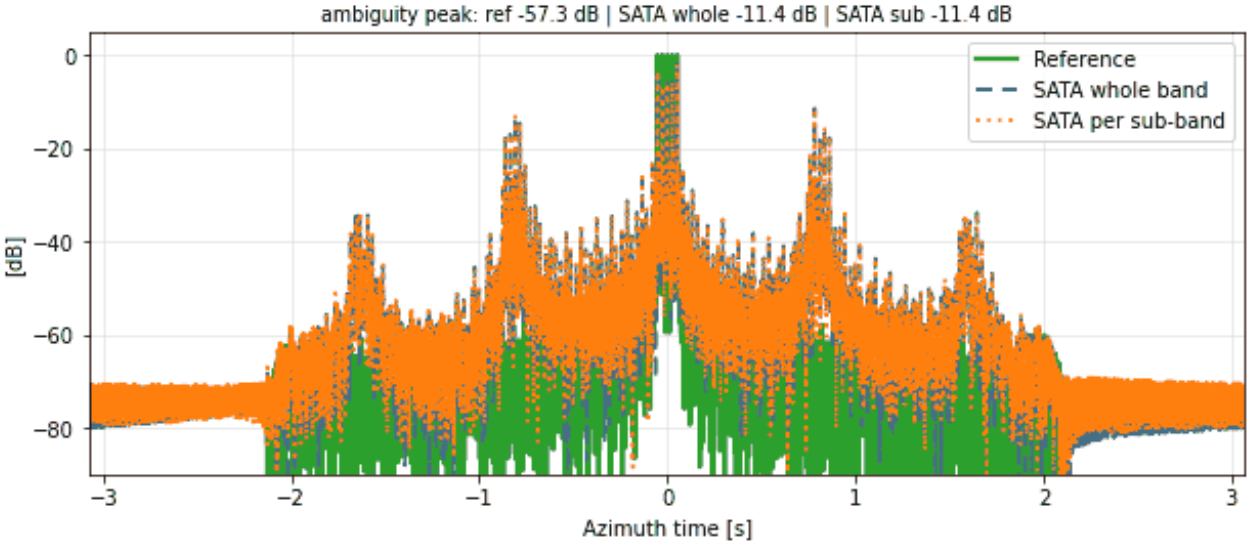


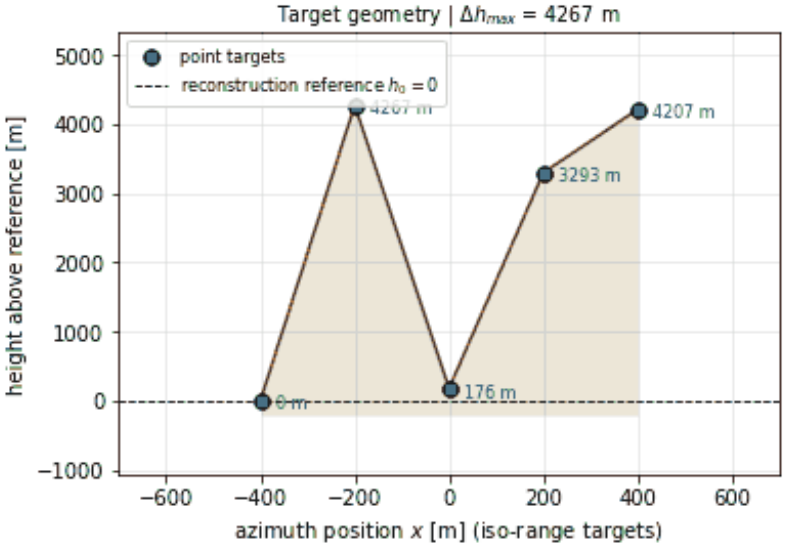





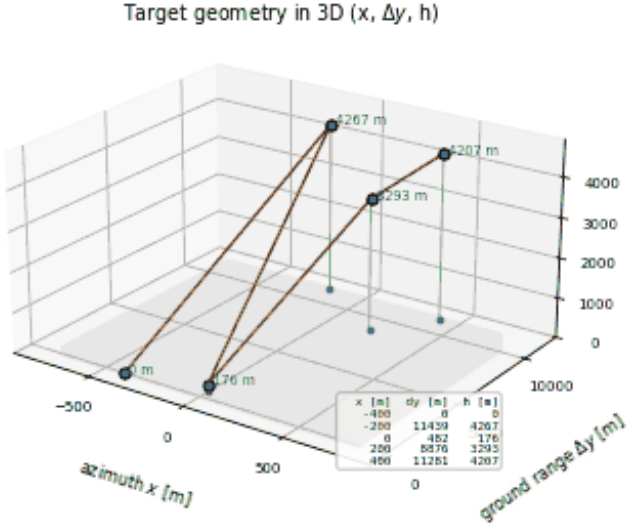


RH-SL-004 | SATA 1D | random heights: N = 5, heights $\sim U(0, 6500)$ m, seed 1, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

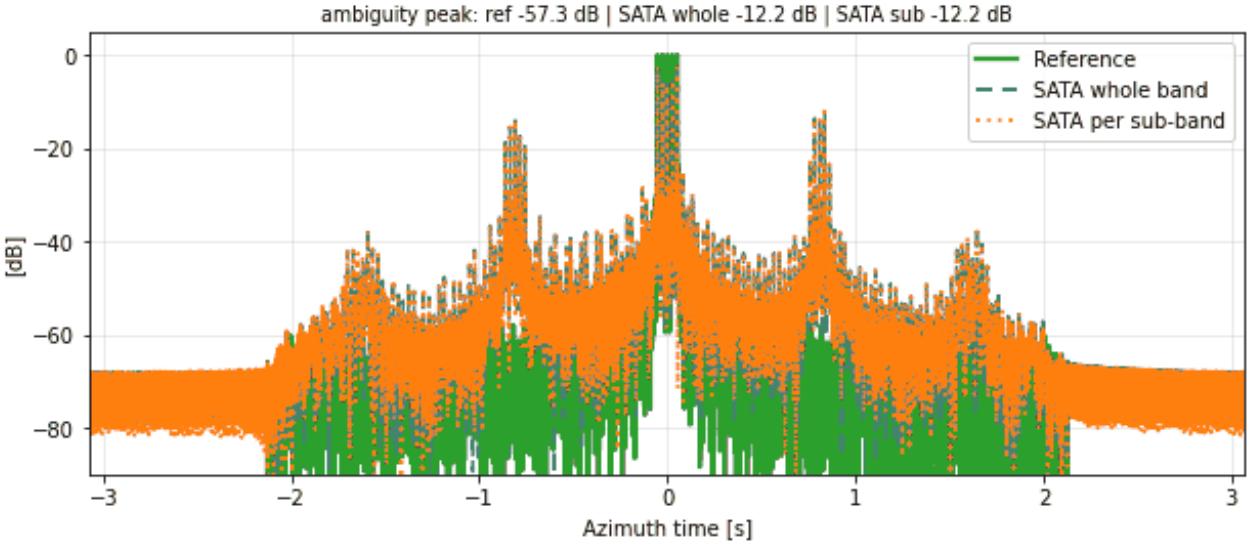

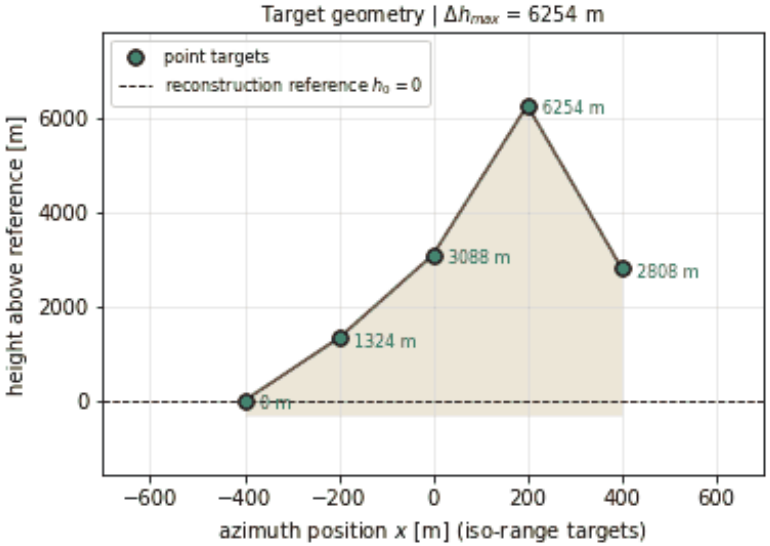


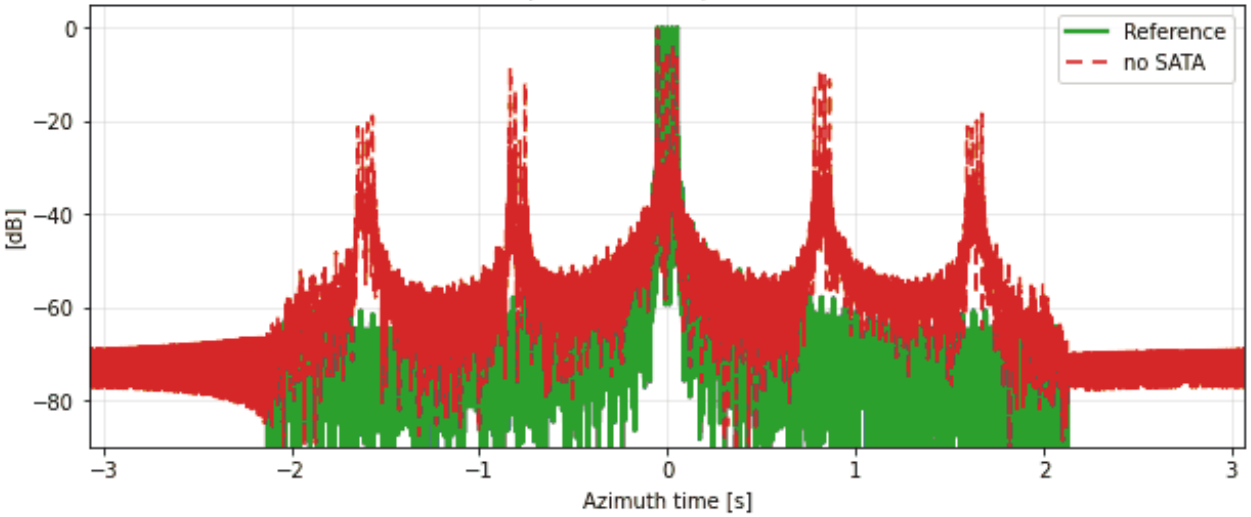


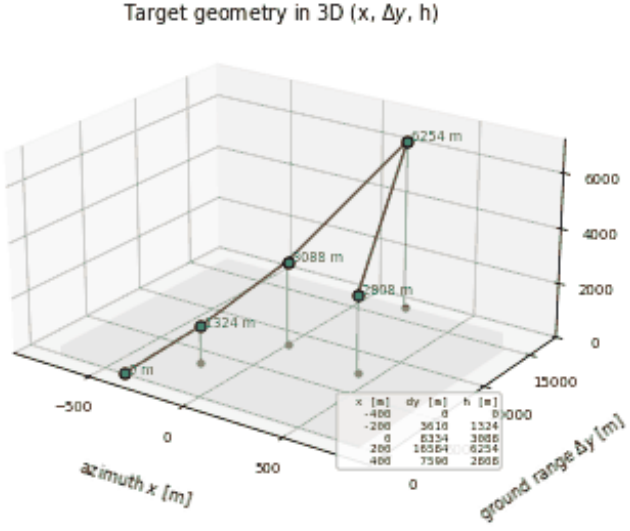



RH-SL-005 | SATA 1D | random heights: N = 5, heights $\sim U(0, 13000)$ m, seed 0, targets 200 m apart (small distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

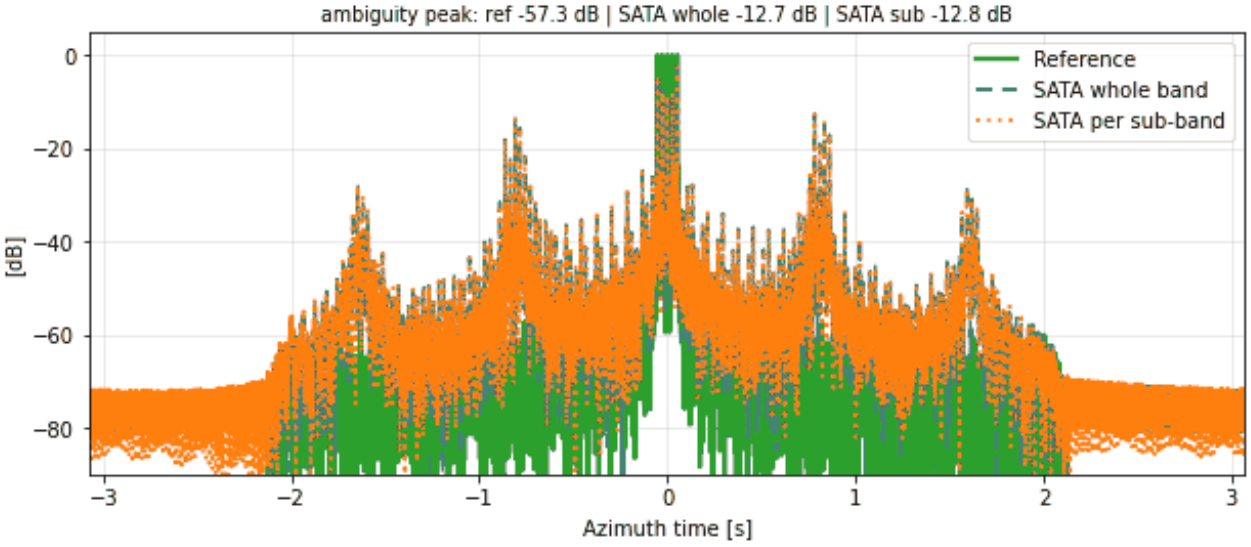

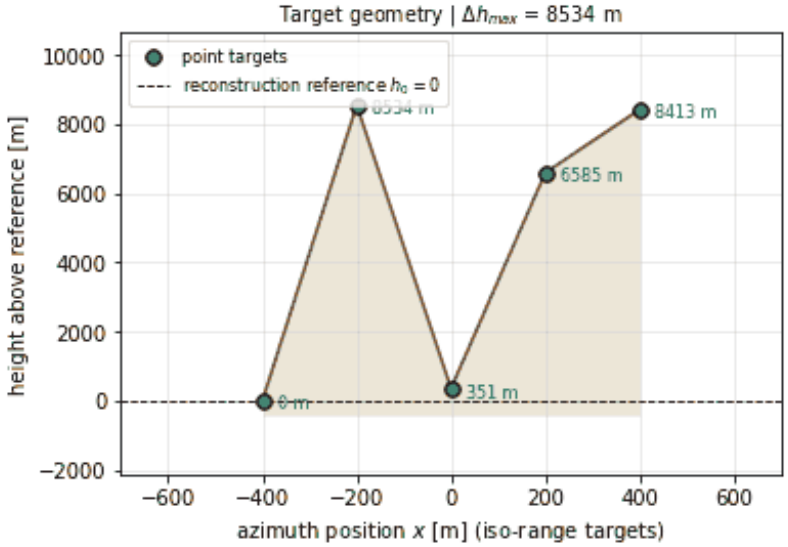


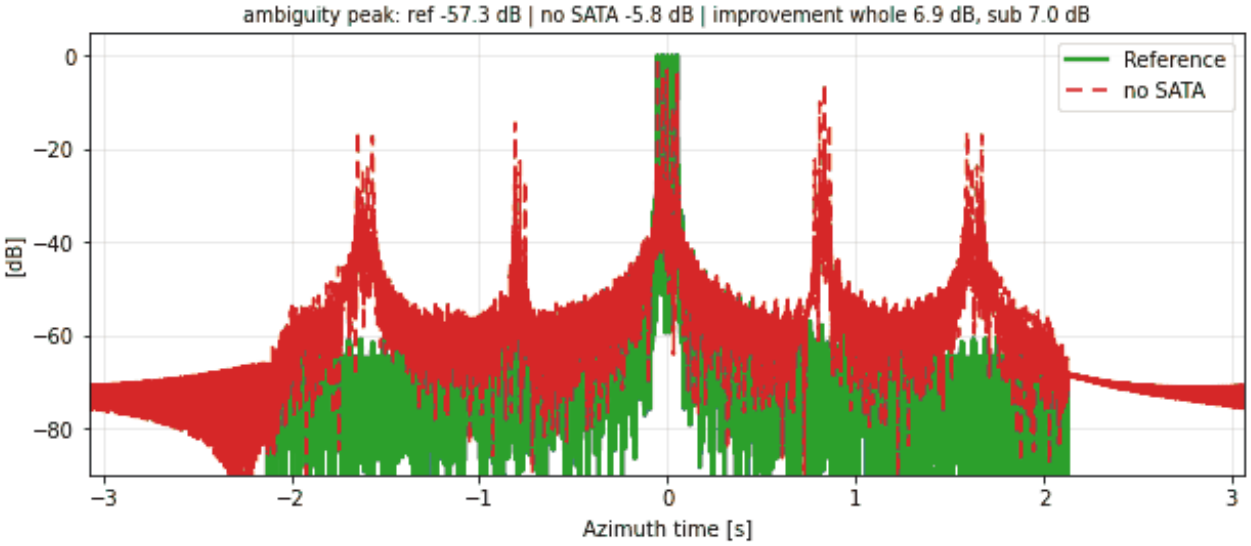


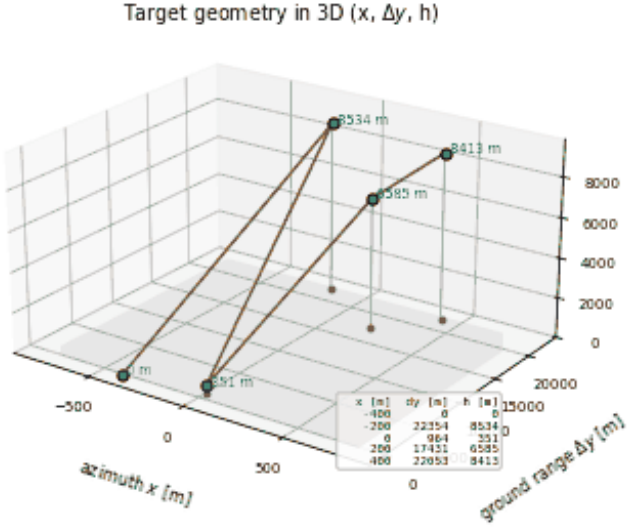



RH-SL-006 | SATA 1D | random heights: N = 5, heights $\sim U(0, 13000)$ m, seed 1, targets 200 m apart (small distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

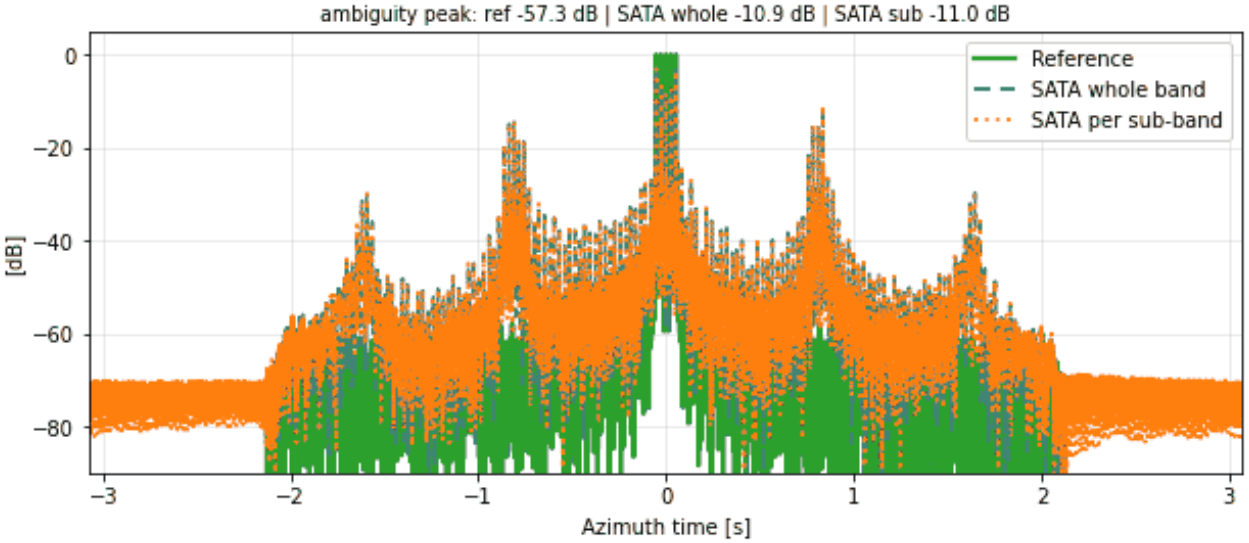

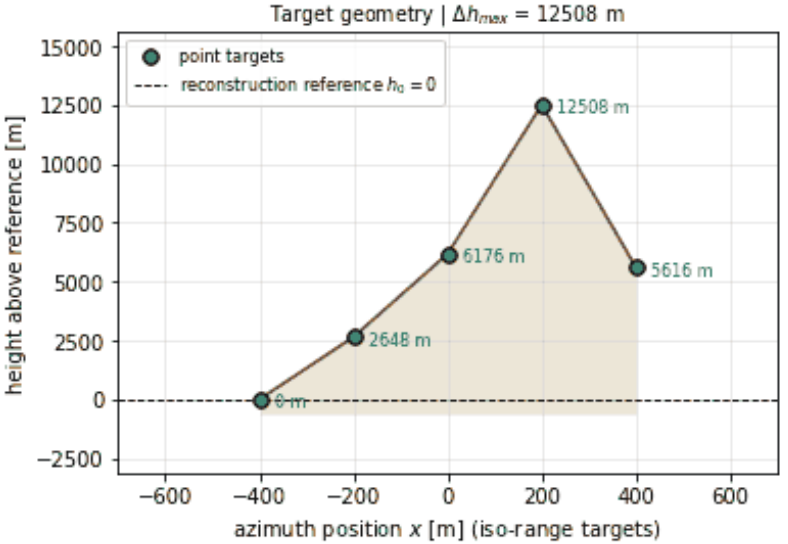


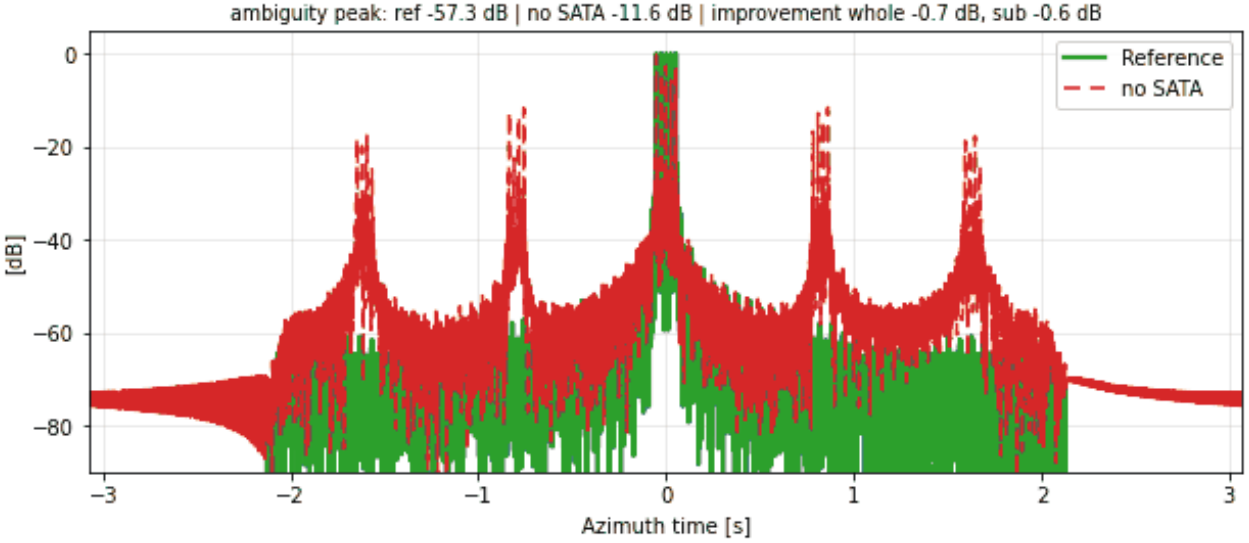


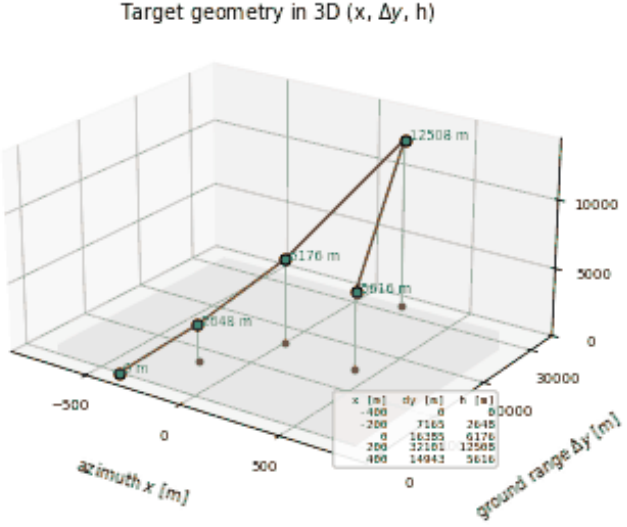



RH-SL-007 | SATA 1D | random heights: N = 9, heights $\sim U(0, 1300)$ m, seed 0, targets 200 m apart (small distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

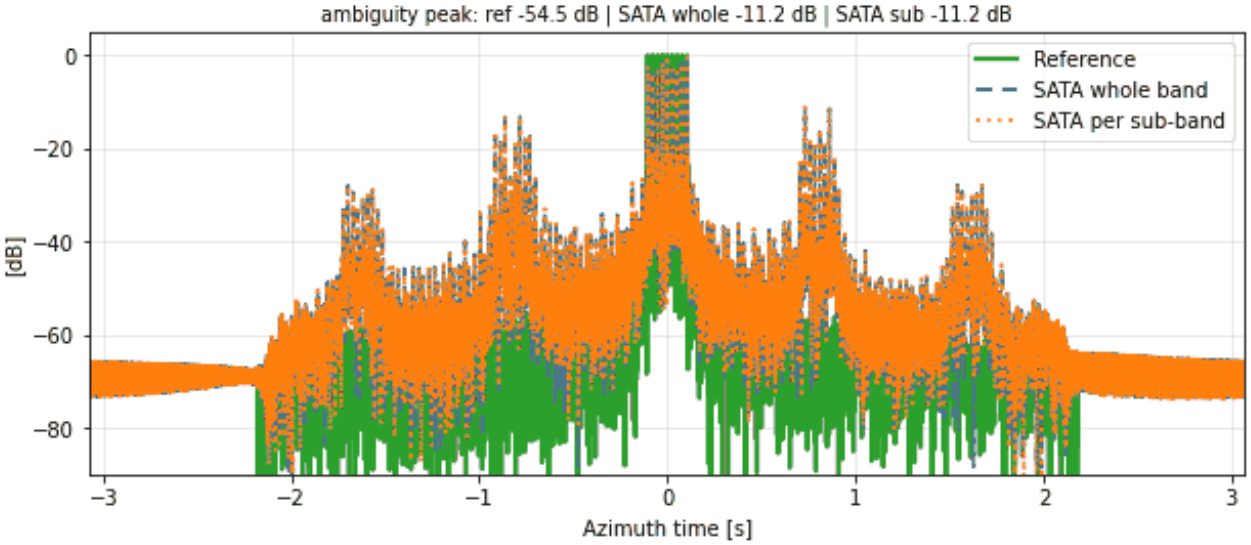

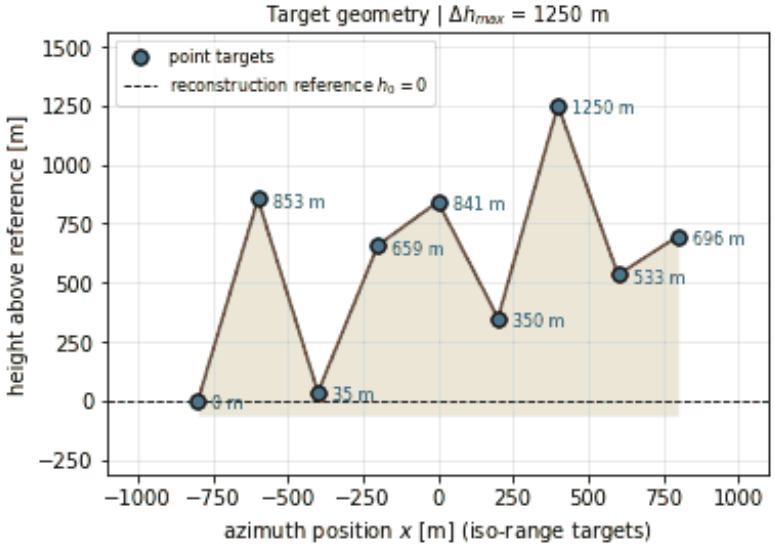


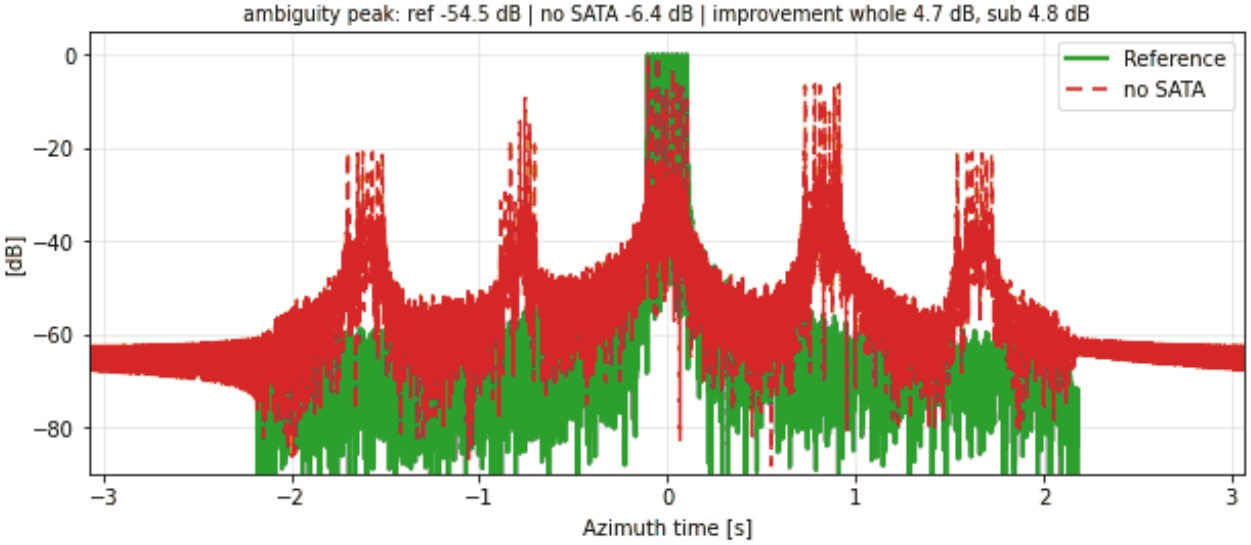


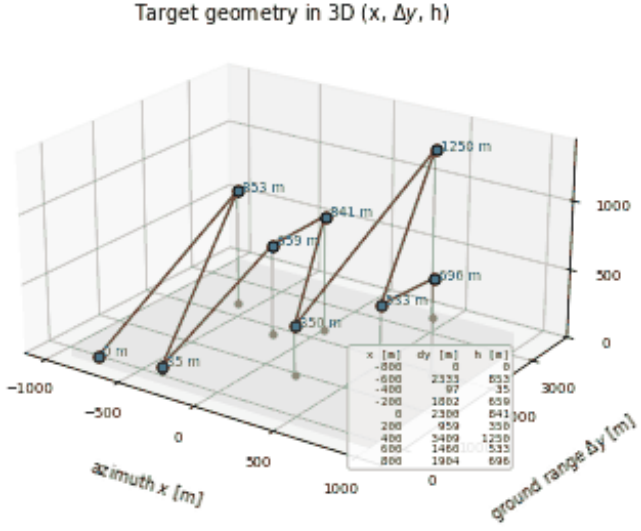



RH-SL-008 | SATA 1D | random heights: N = 9, heights $\sim U(0, 1300)$ m, seed 1, targets 200 m apart (small distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

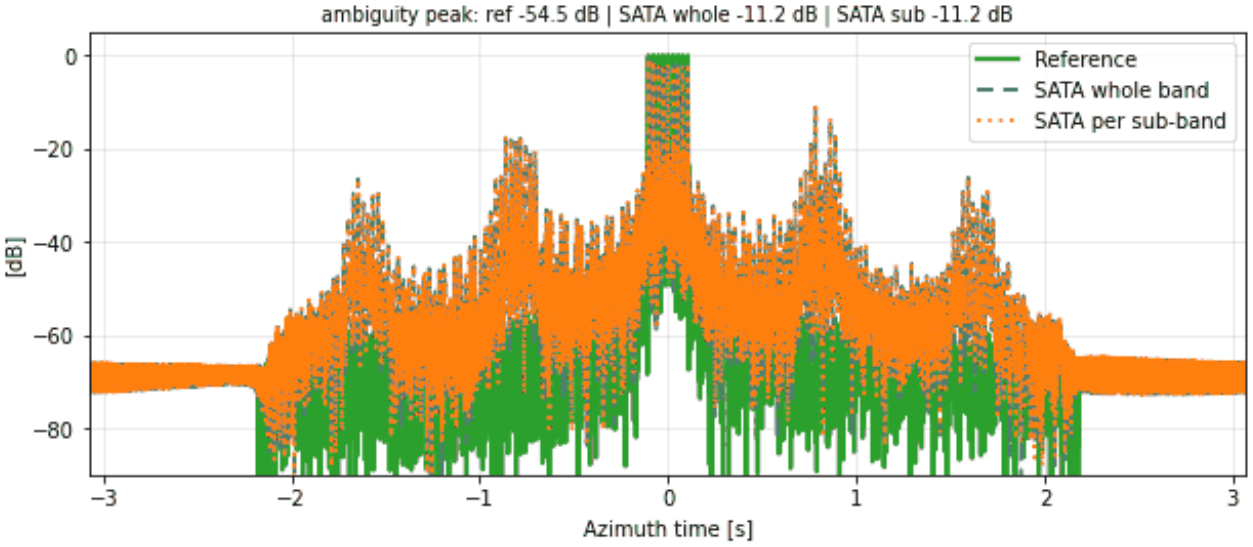

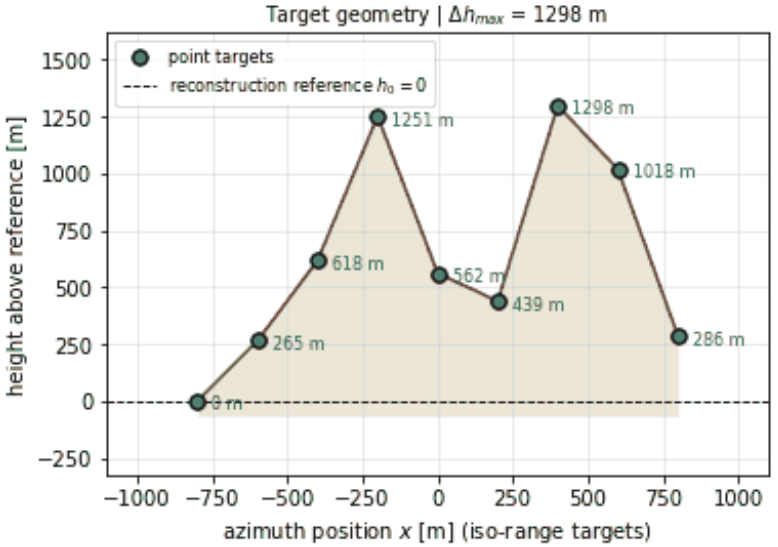


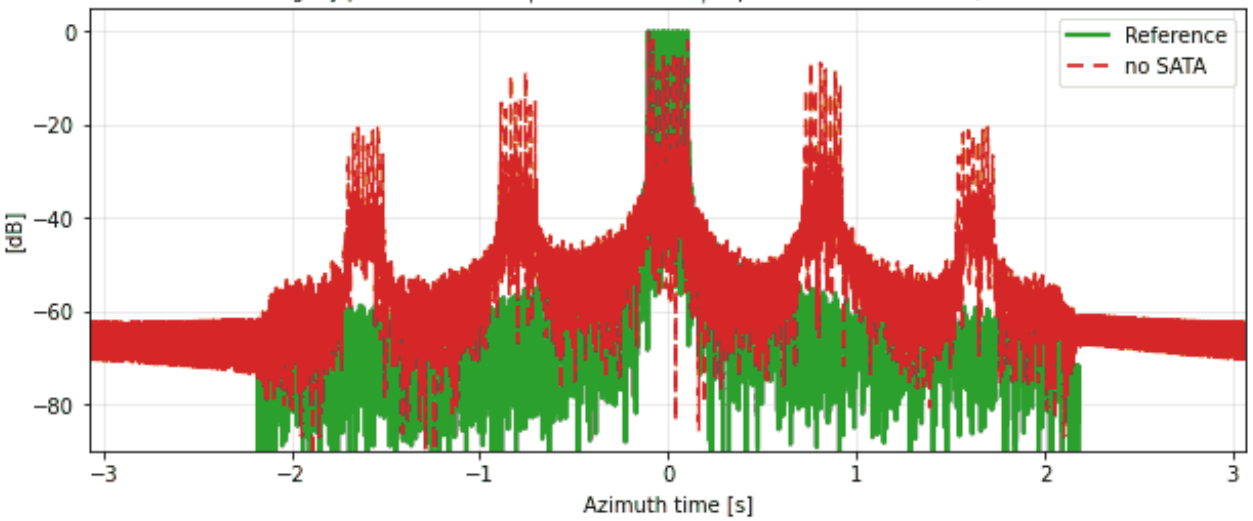


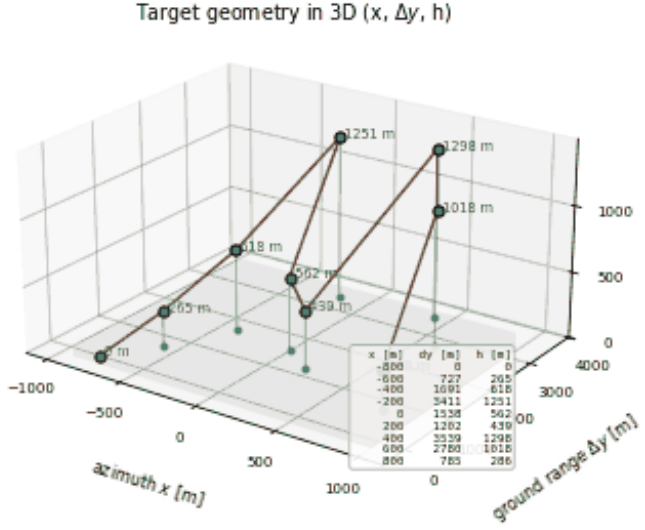



RH-SL-009 | SATA 1D | random heights: N = 9, heights $\sim U(0, 6500)$ m, seed 0, targets 200 m apart (small distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

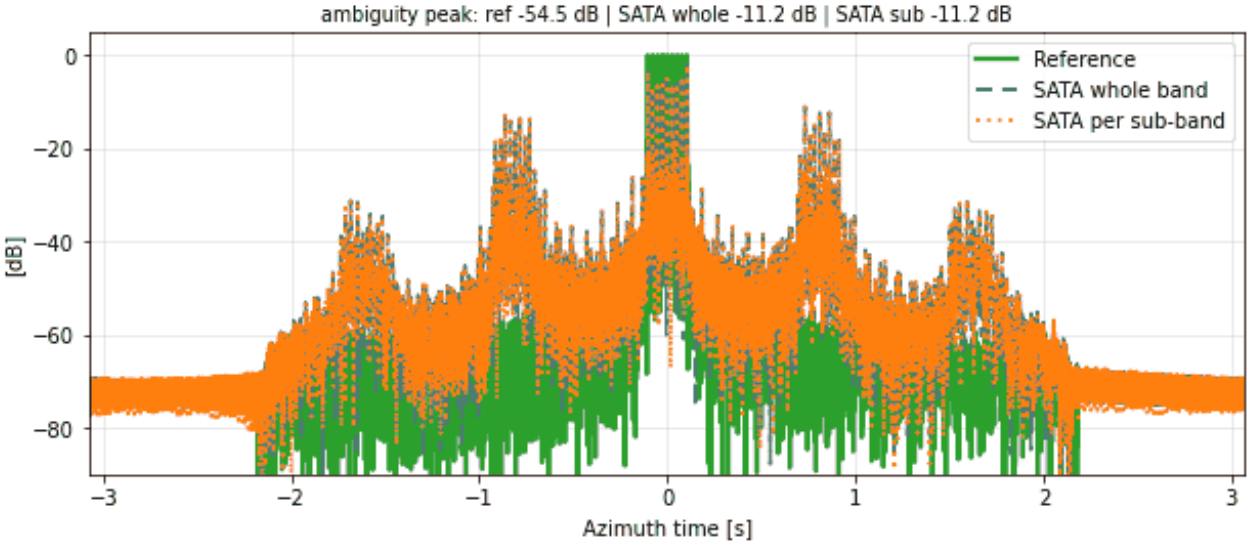

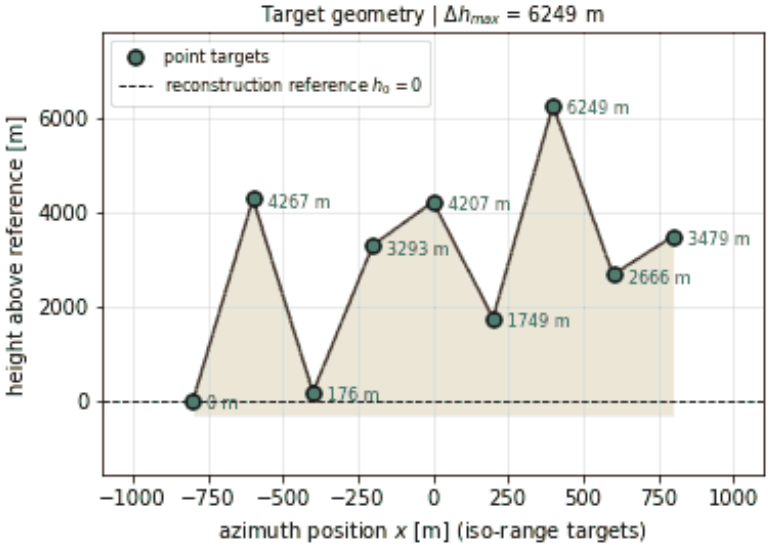


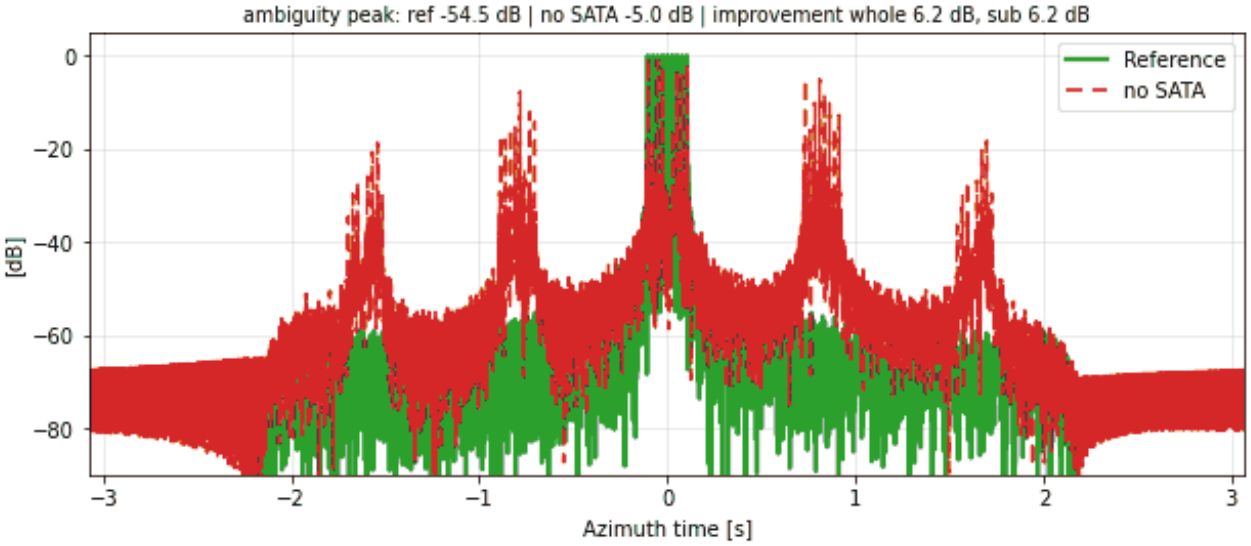


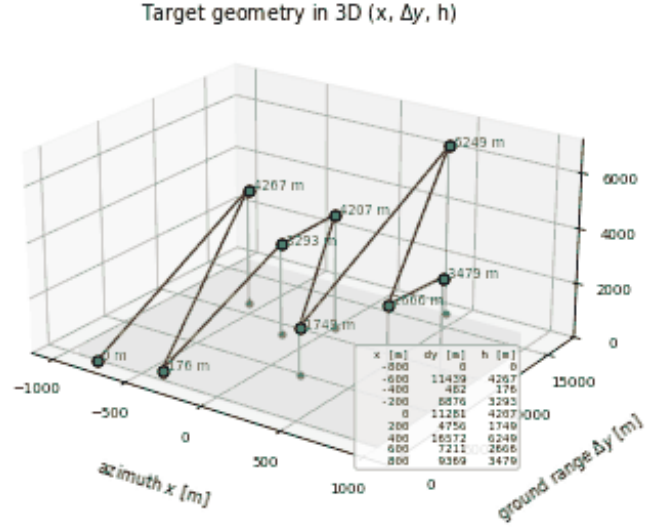



RH-SL-010 | SATA 1D | random heights: N = 9, heights $\sim U(0, 6500)$ m, seed 1, targets 200 m apart (small distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

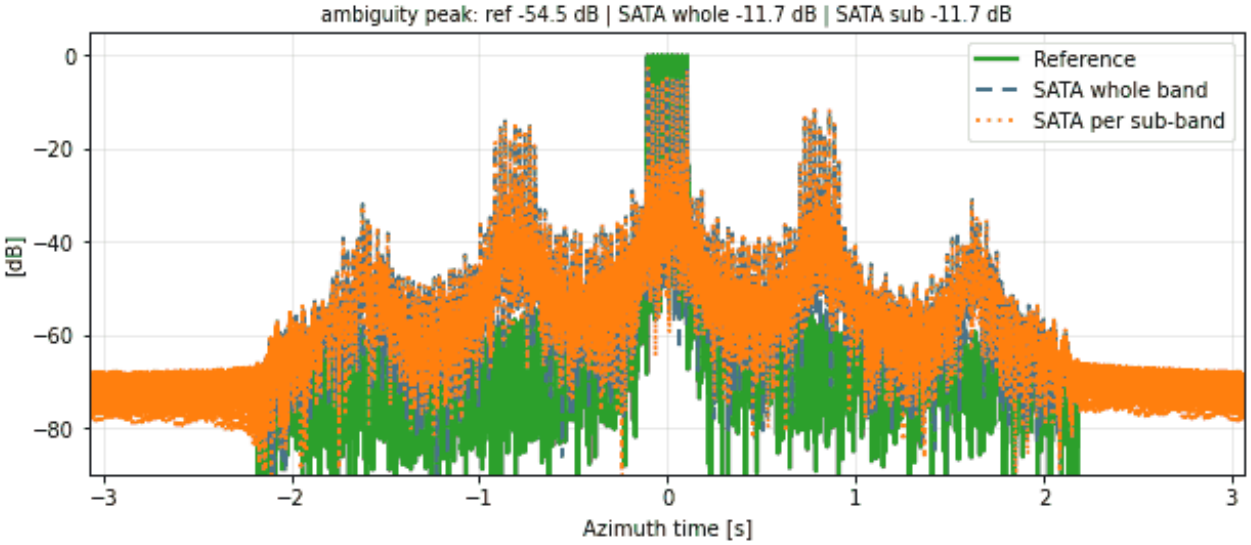

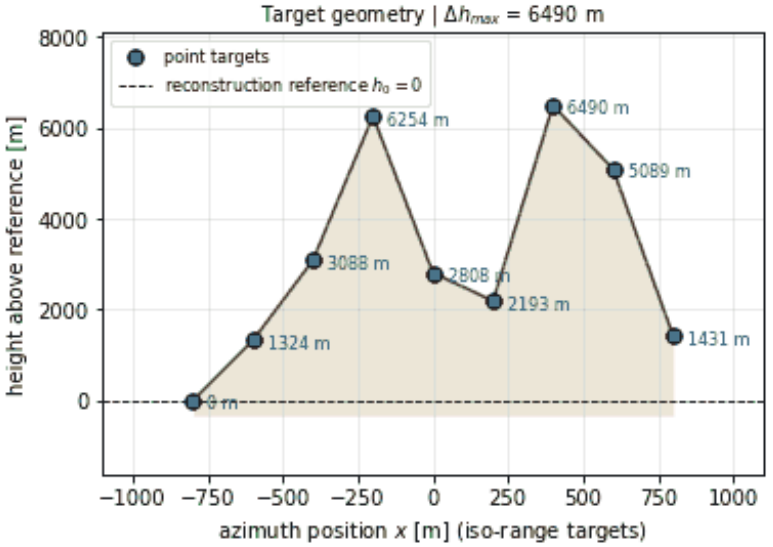


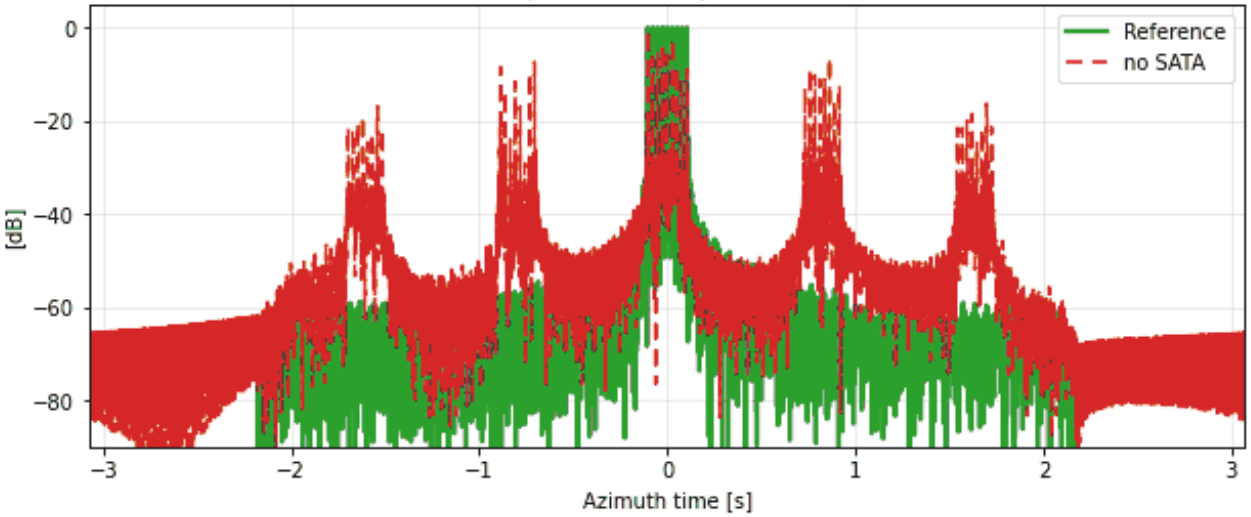


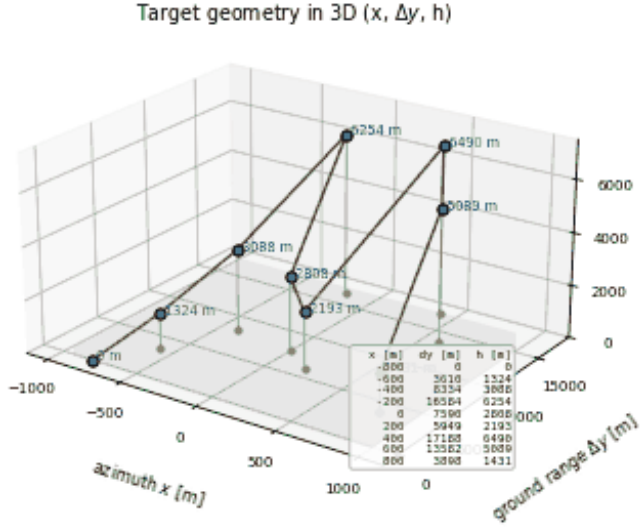



RH-SL-011 | SATA 1D | random heights: N = 9, heights $\sim U(0, 13000)$ m, seed 0, targets 200 m apart (small distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

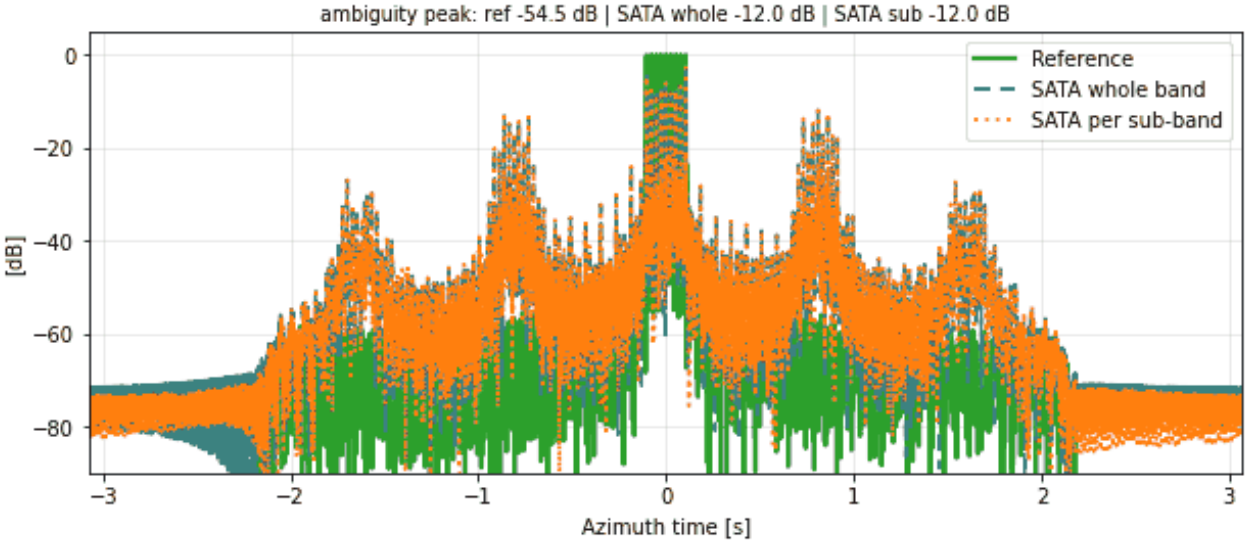

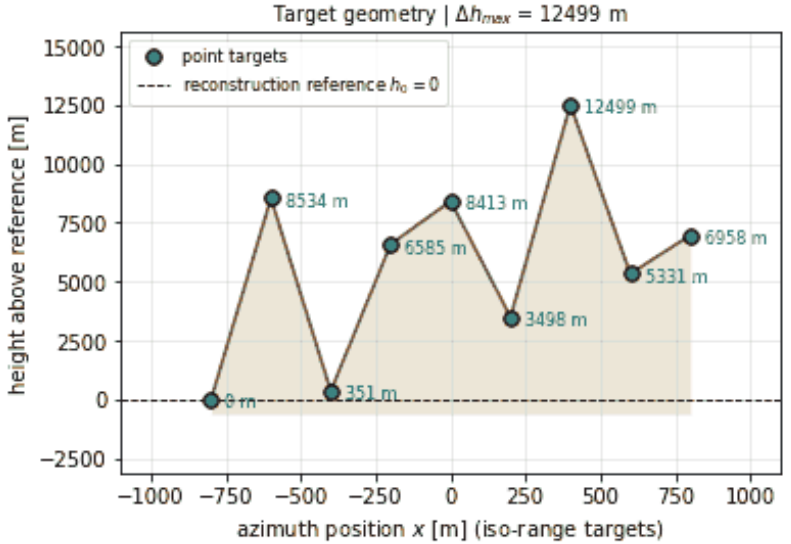


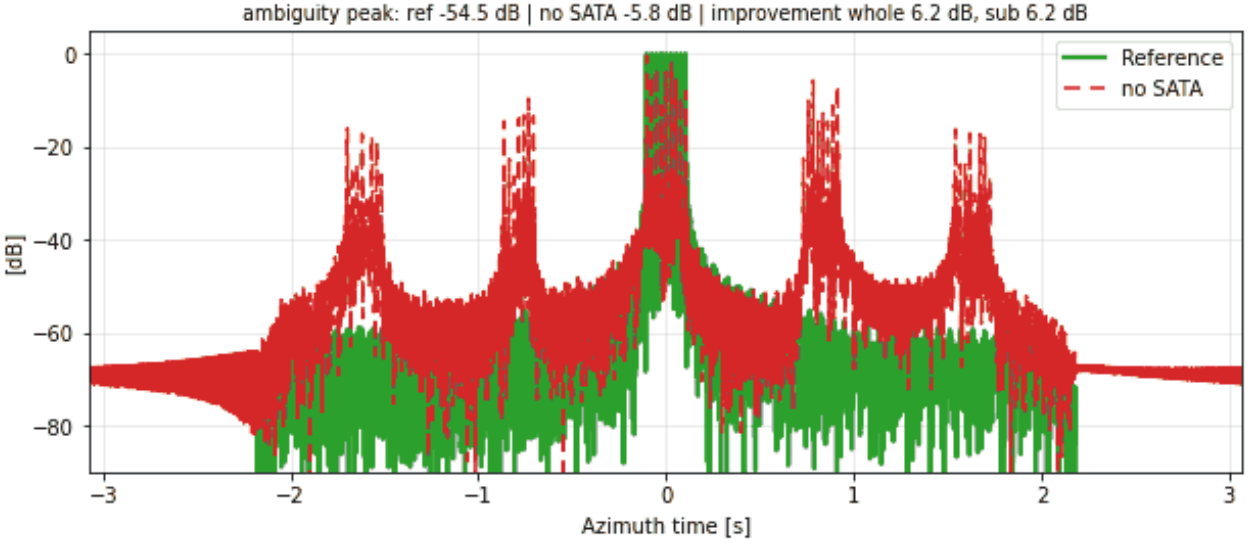


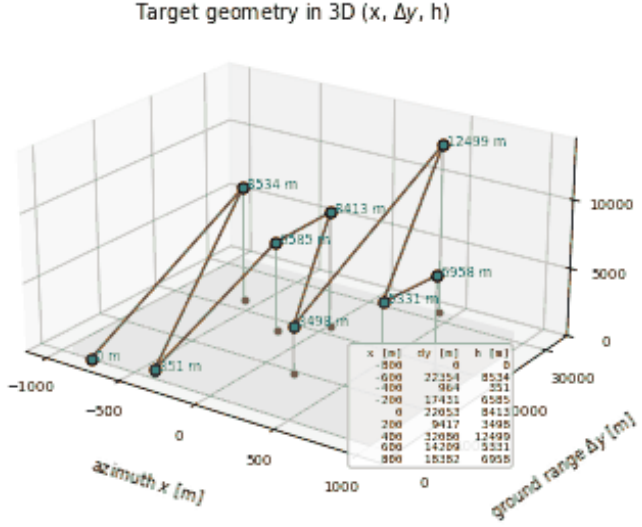



RH-SL-012 | SATA 1D | random heights: N = 9, heights $\sim U(0, 13000)$ m, seed 1, targets 200 m apart (small distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

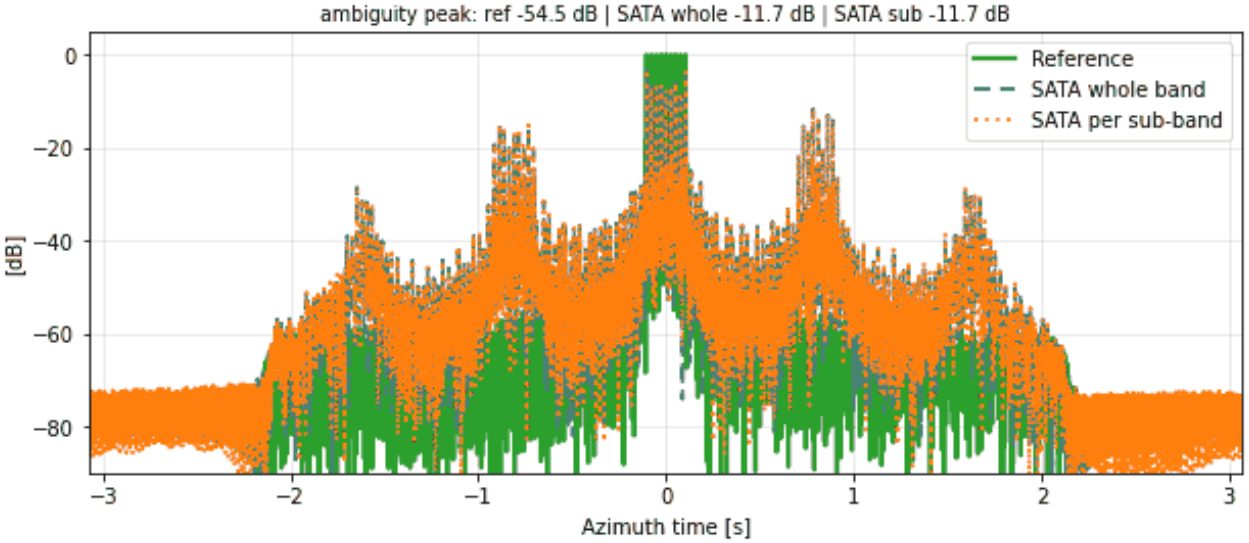


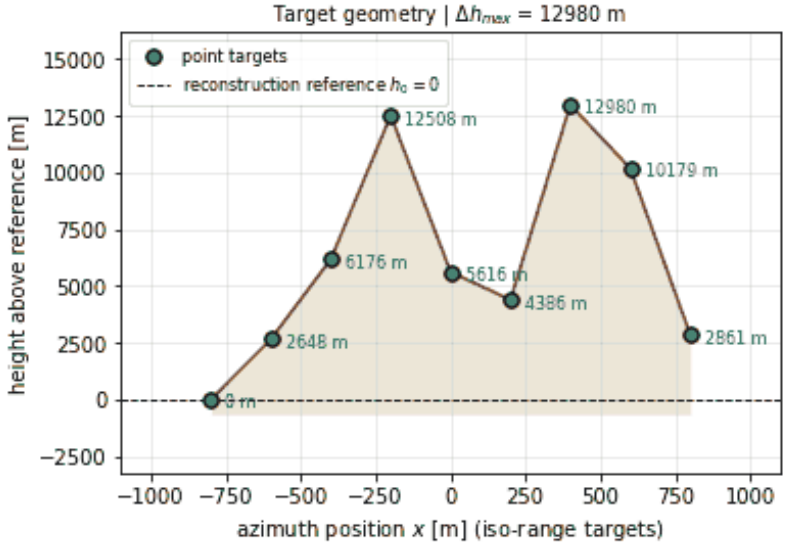


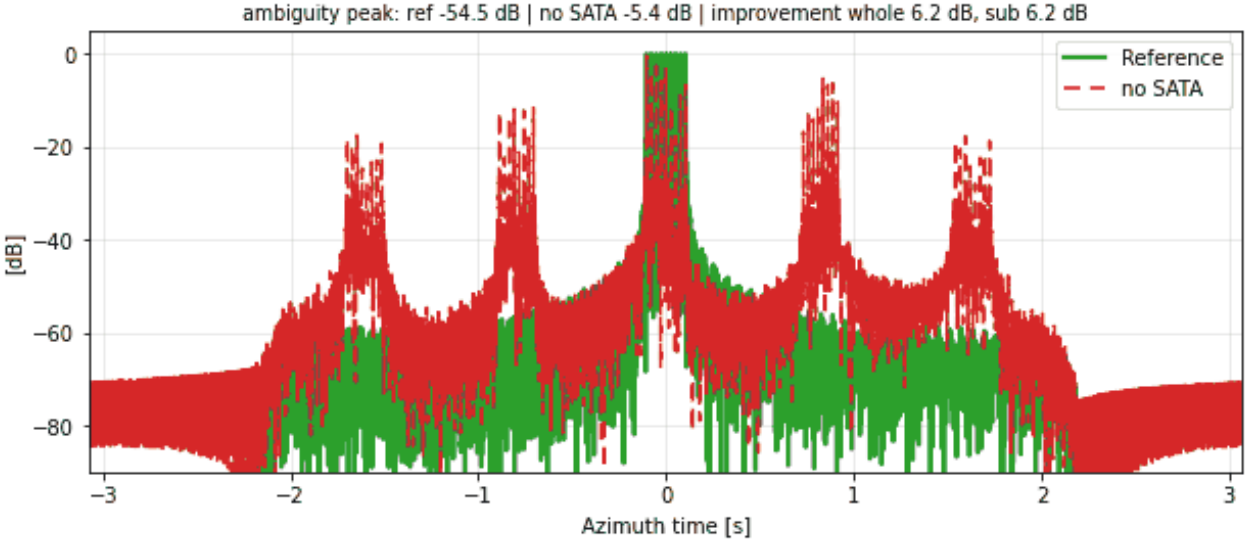


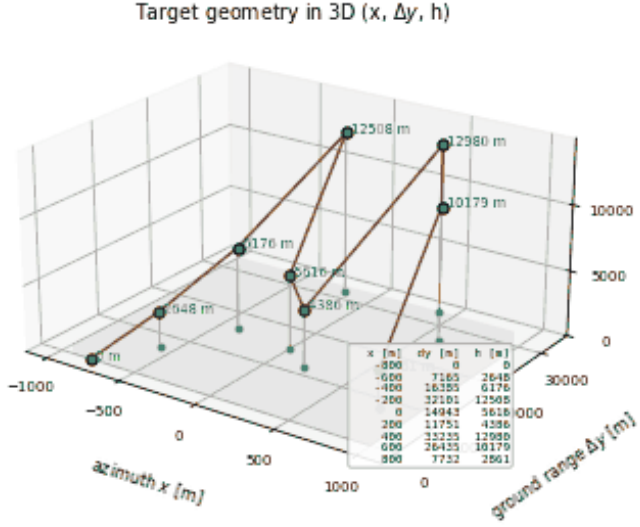


RH-SL-013 | SATA 1D | random heights: N = 13, heights $\sim U(0, 1300)$ m, seed 0, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

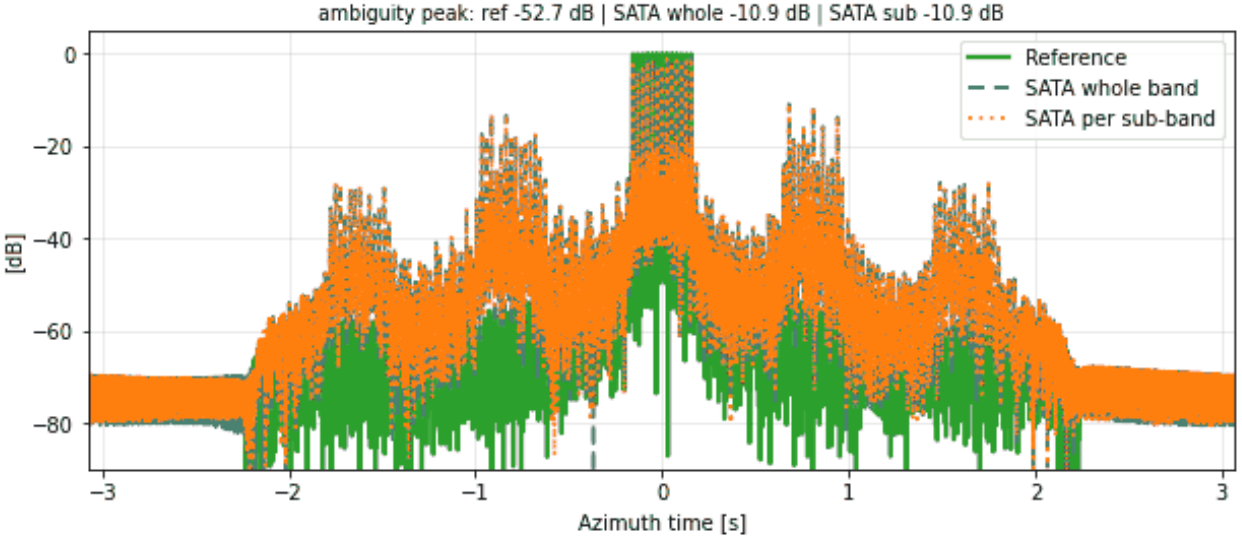

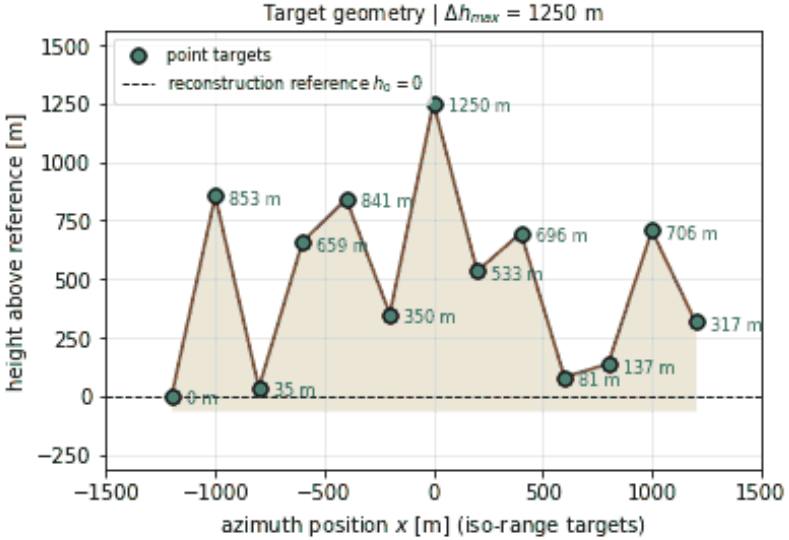


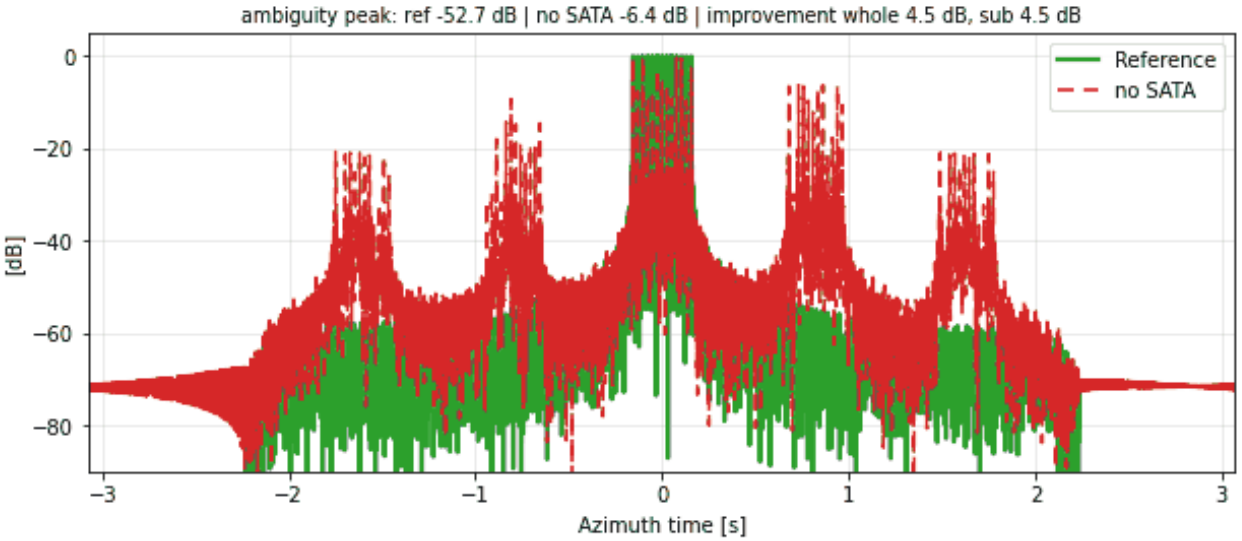


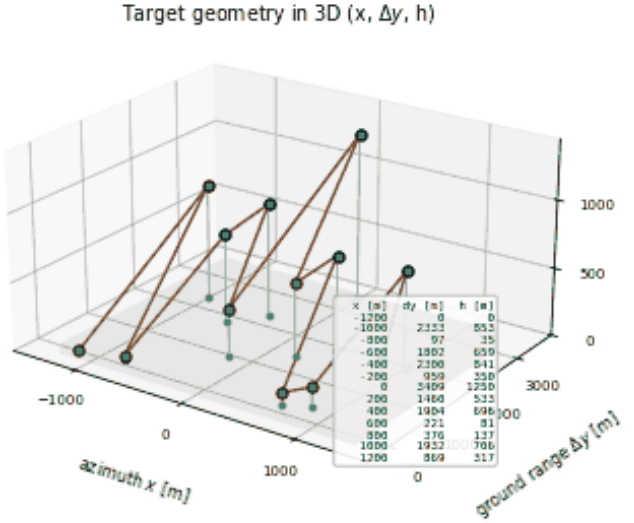



RH-SL-014 | SATA 1D | random heights: N = 13, heights $\sim U(0, 1300)$ m, seed 1, targets 200 m apart (small distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

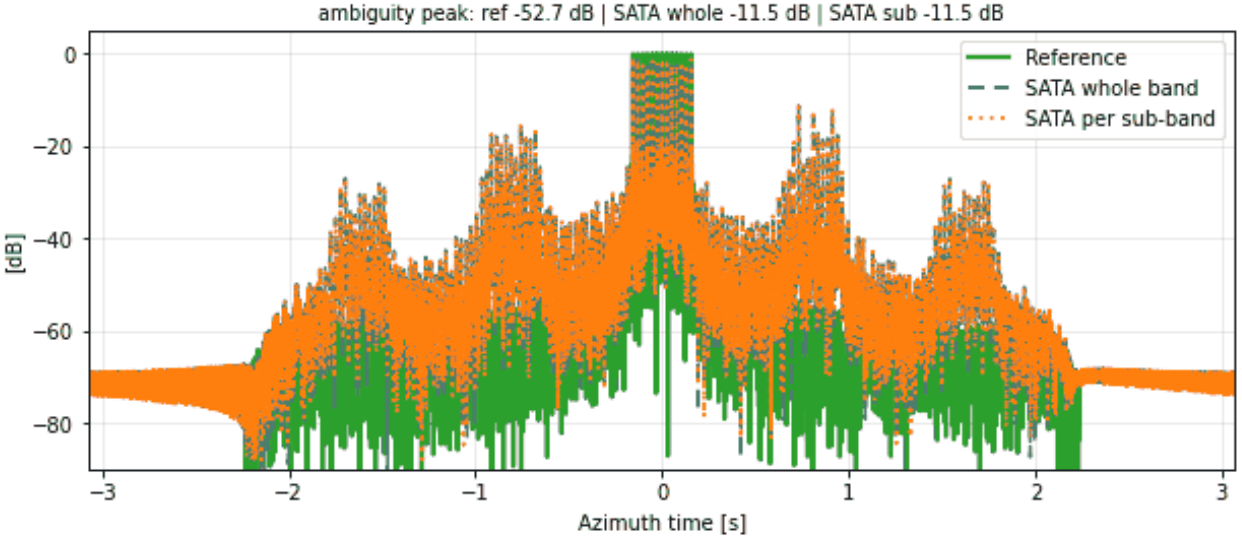

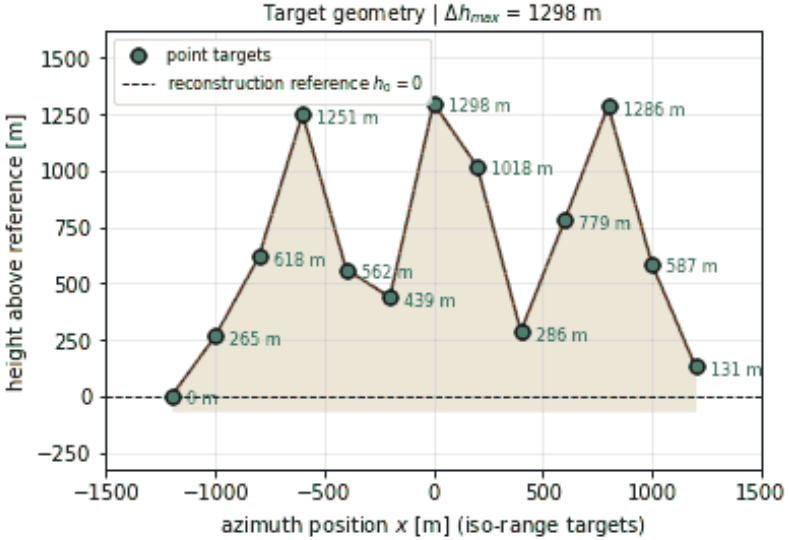


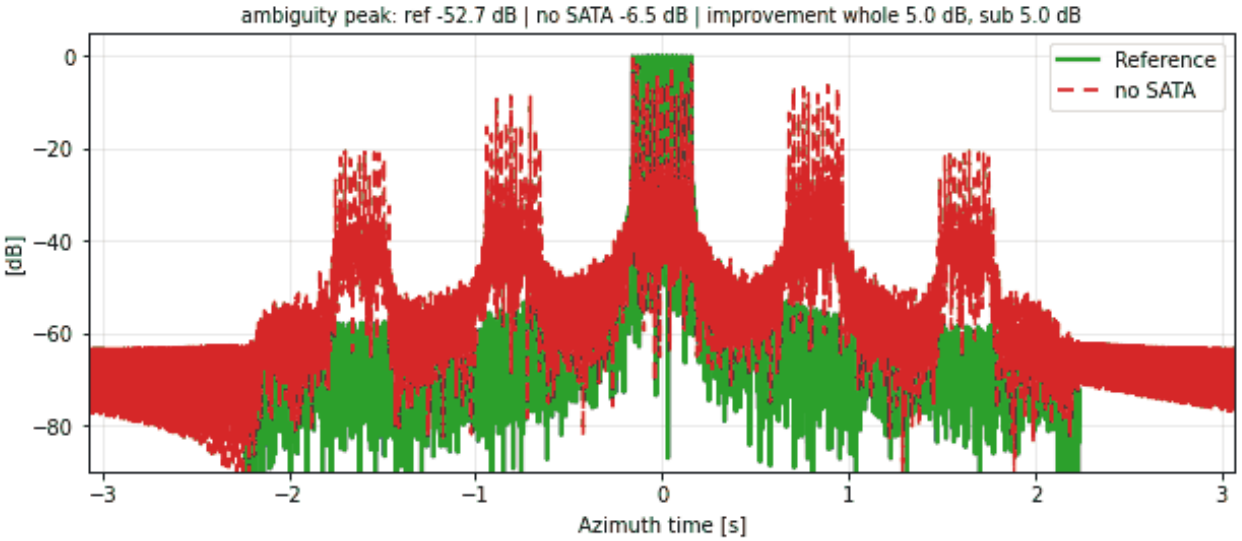


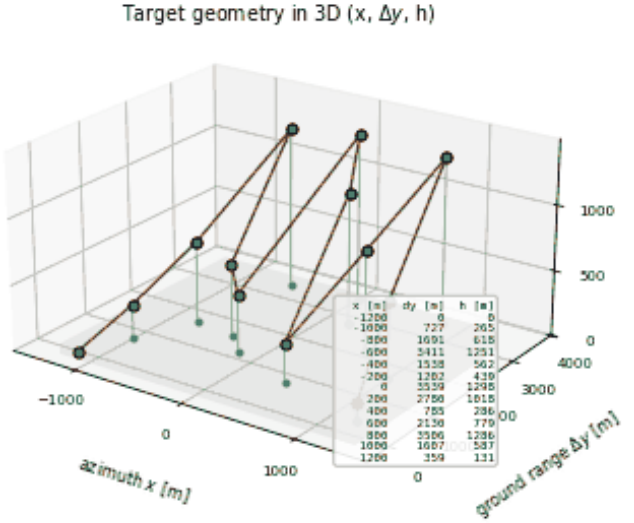



RH-SL-015 | SATA 1D | random heights: N = 13, heights $\sim U(0, 6500)$ m, seed 0, targets 200 m apart (small distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

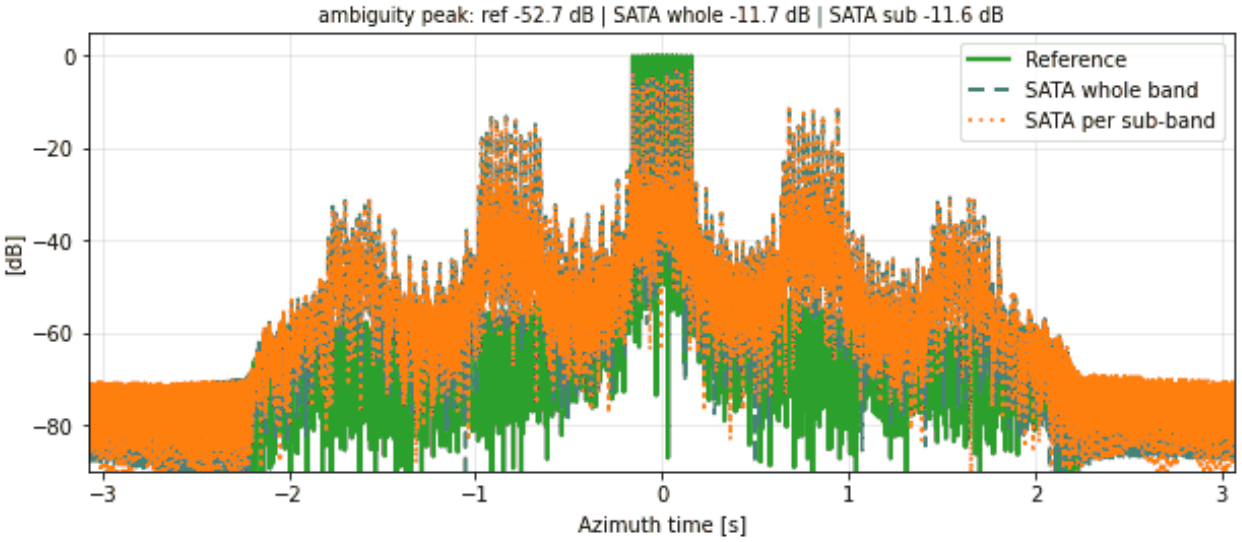

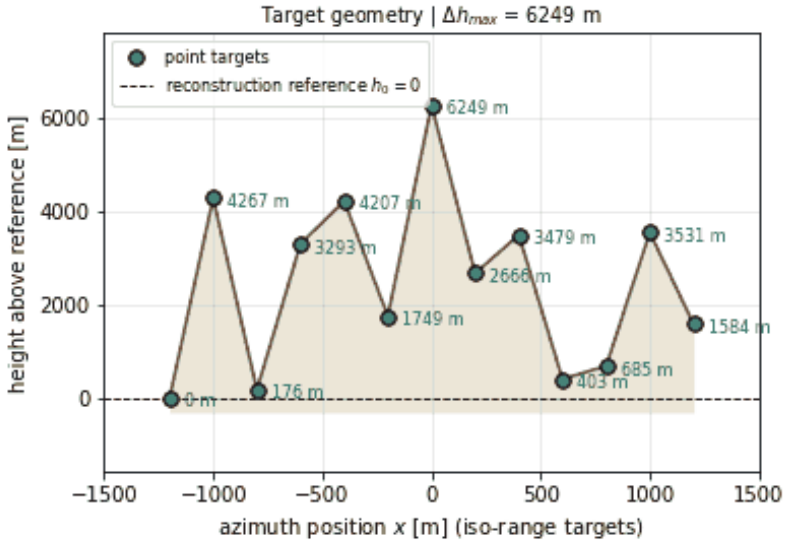


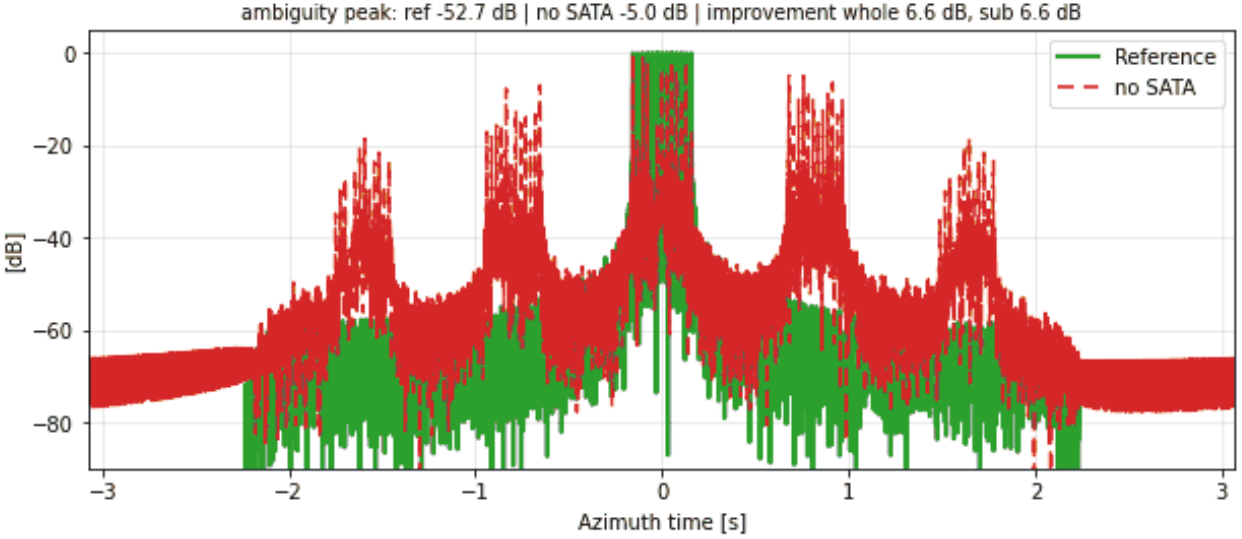


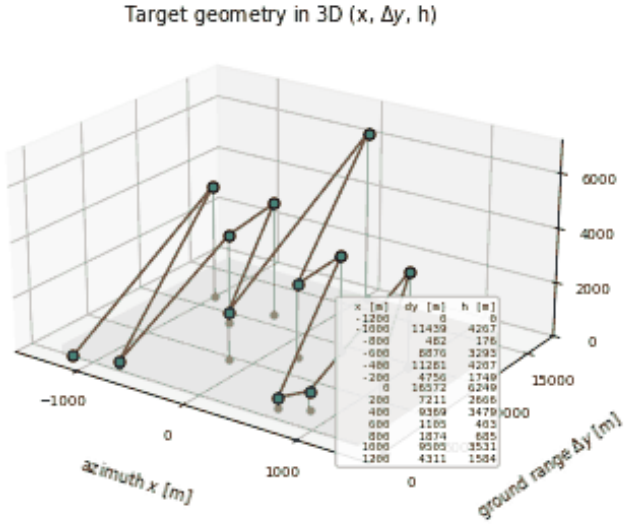



RH-SL-016 | SATA 1D | random heights: N = 13, heights $\sim U(0, 6500)$ m, seed 1, targets 200 m apart (small distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

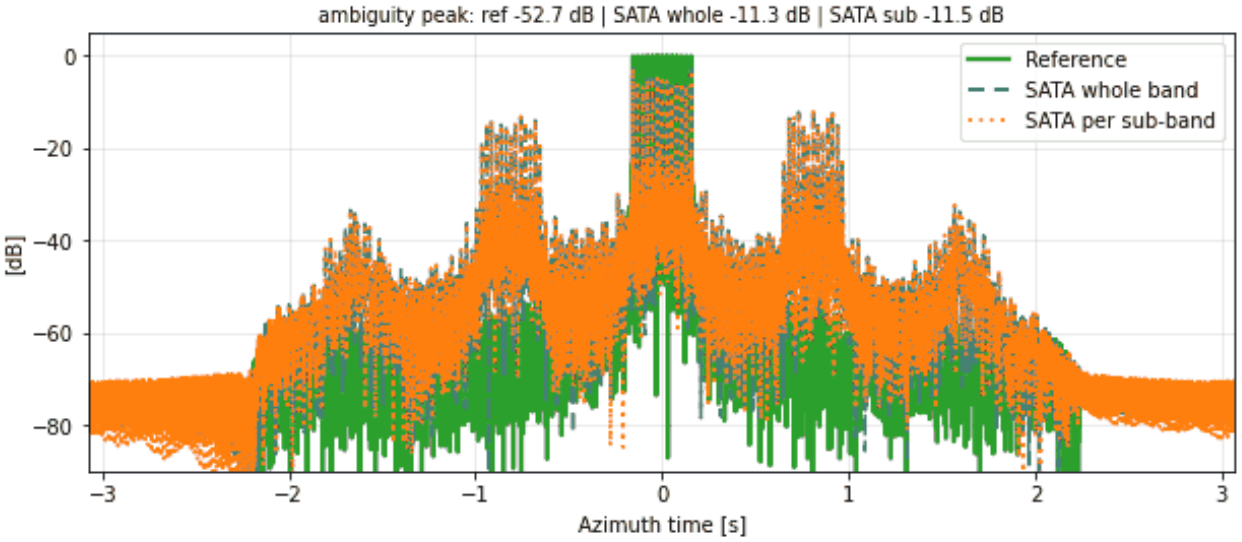


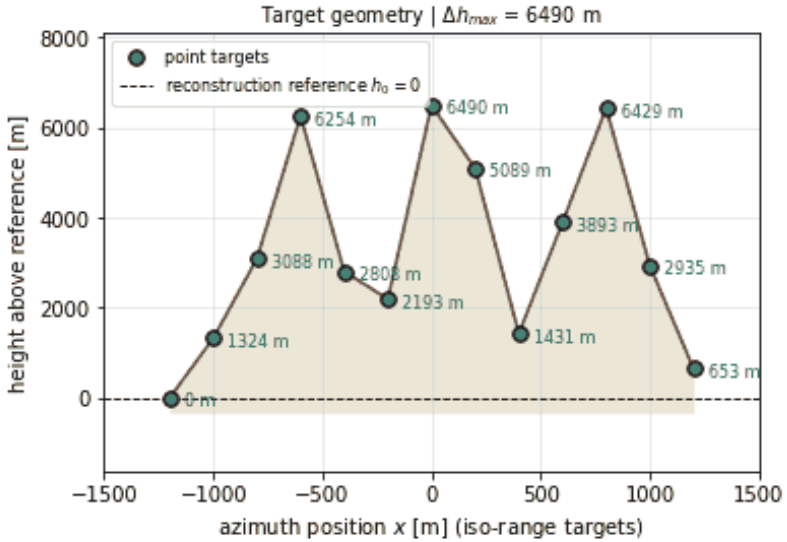


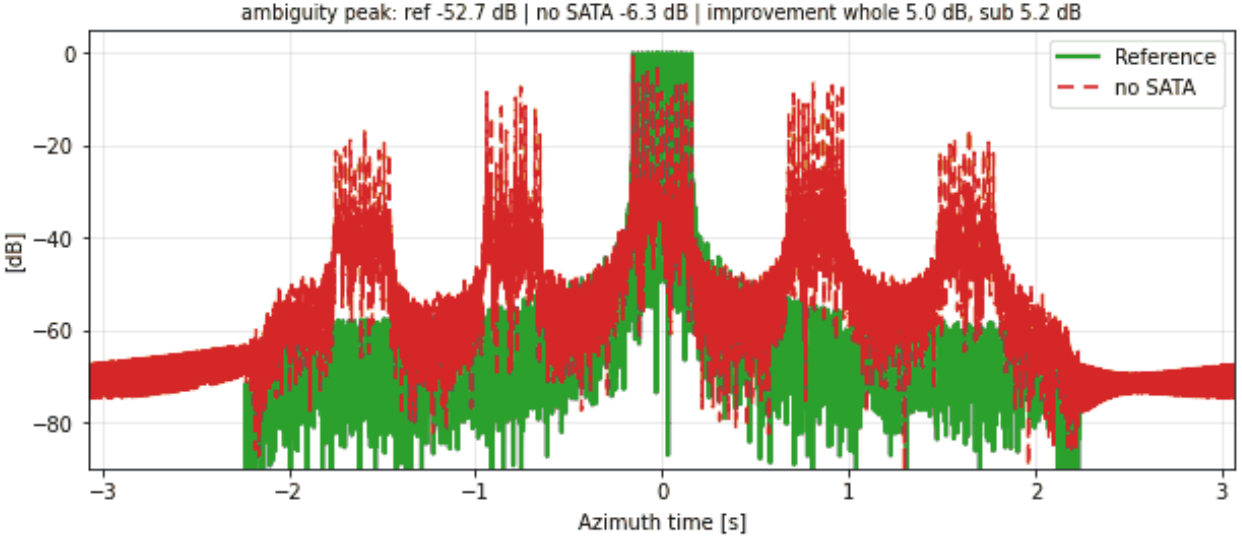


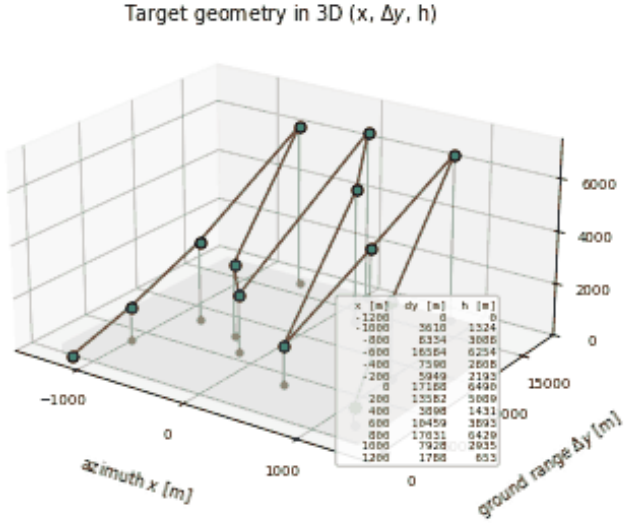


RH-SL-017 | SATA 1D | random heights: N = 13, heights $\sim U(0, 13000)$ m, seed 0, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

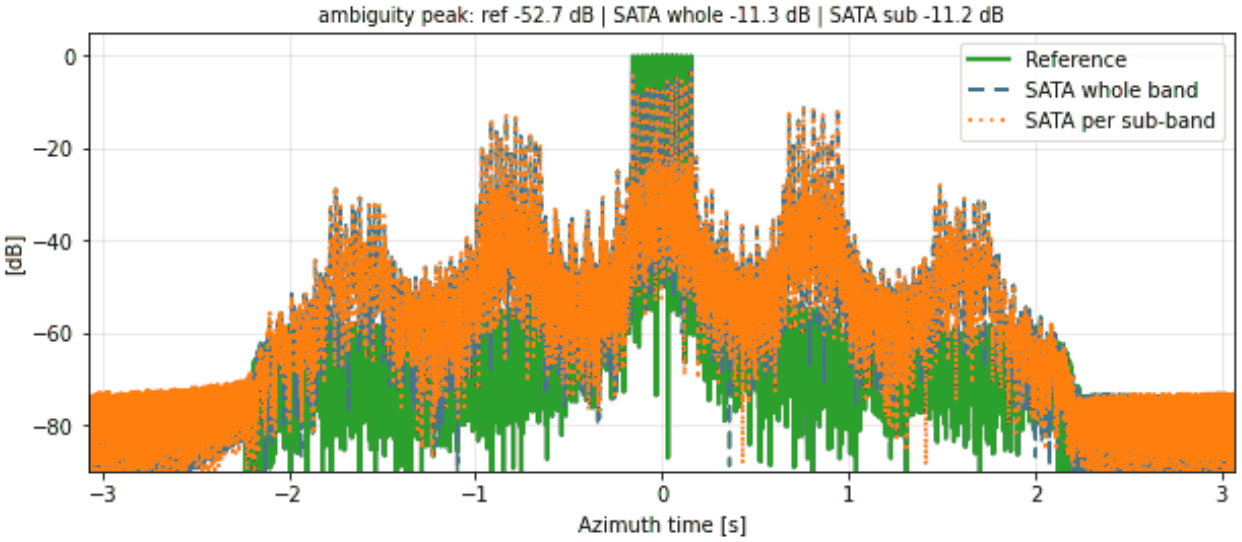


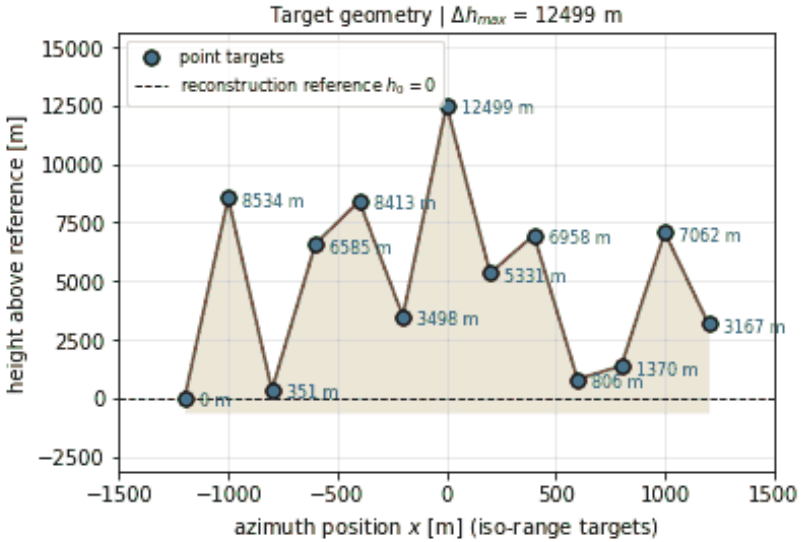


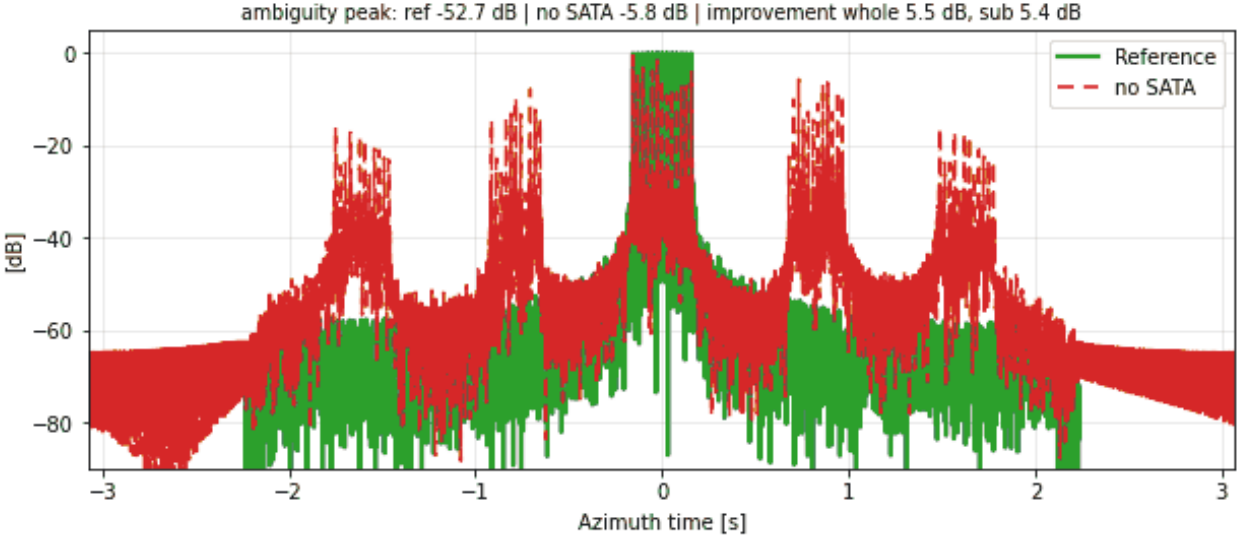


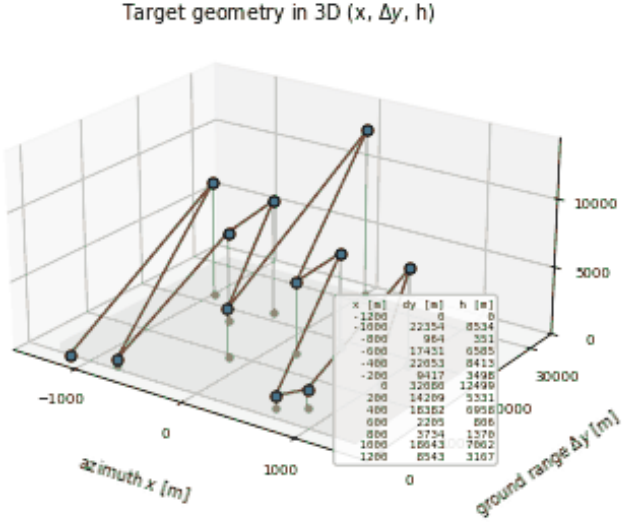


RH-SL-018 | SATA 1D | random heights: N = 13, heights $\sim U(0, 13000)$ m, seed 1, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

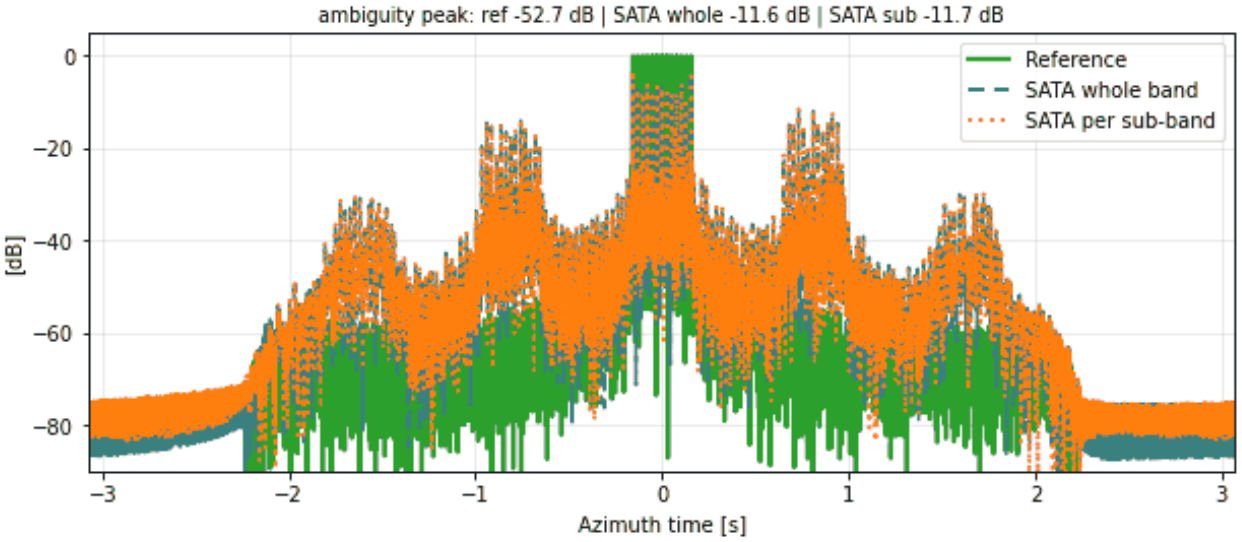

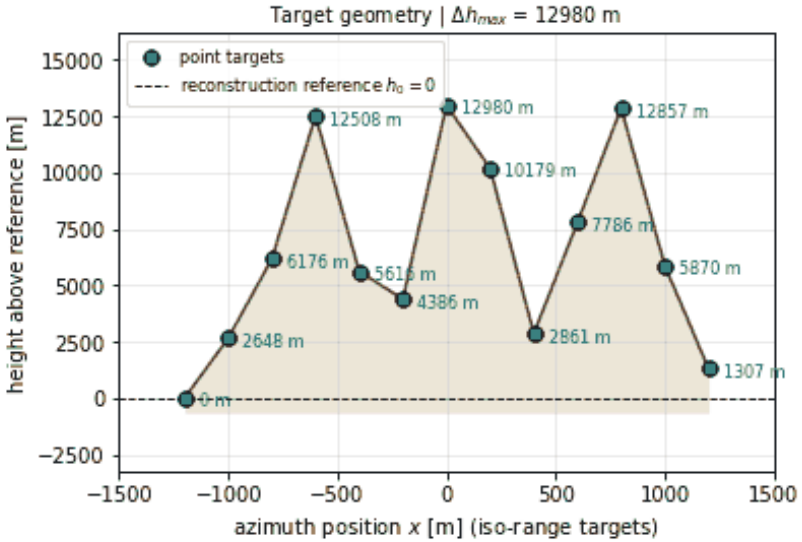


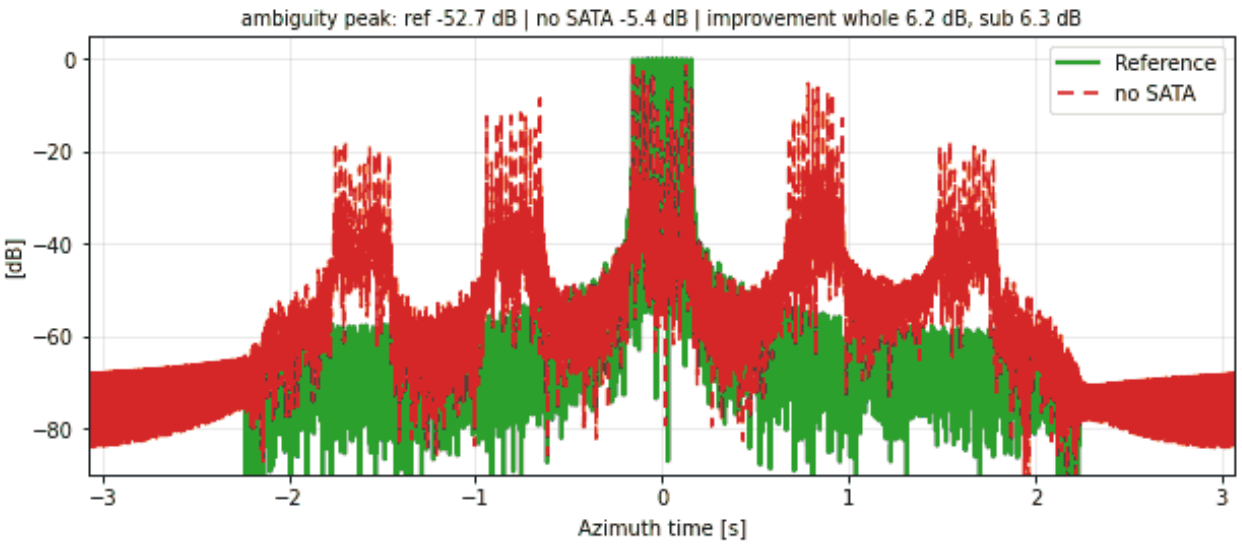


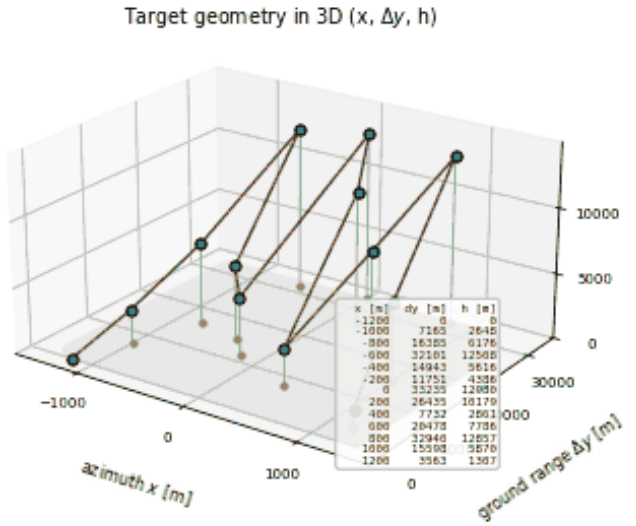


RH-NS-001 | SATA 1D | random heights: N = 5, heights $\sim U(0, 10)$ m, seed 0, targets 2.6 km apart (normal distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

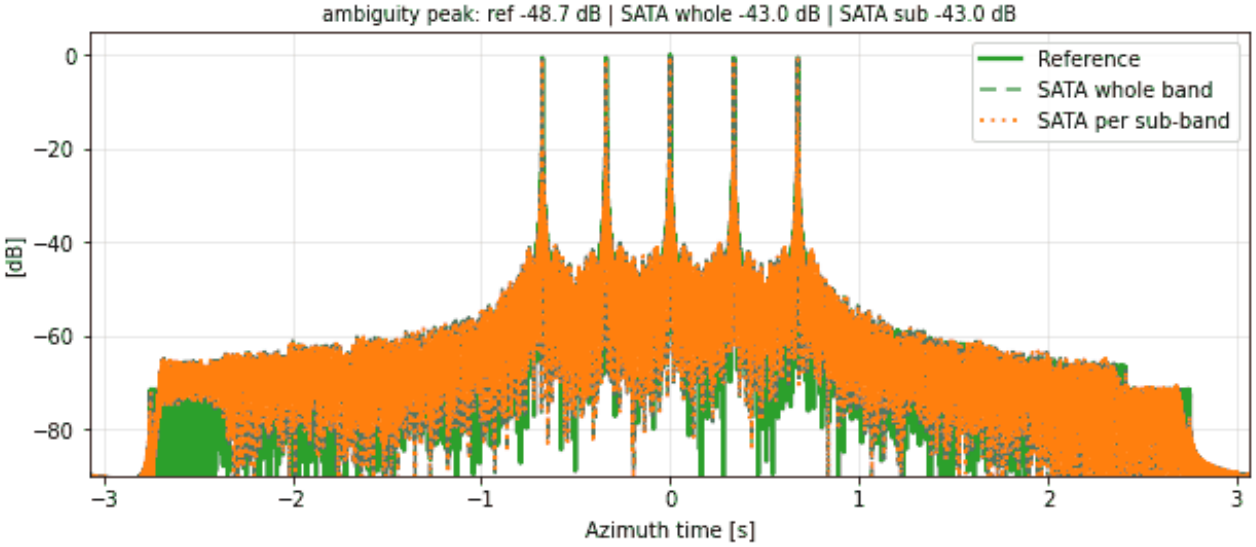

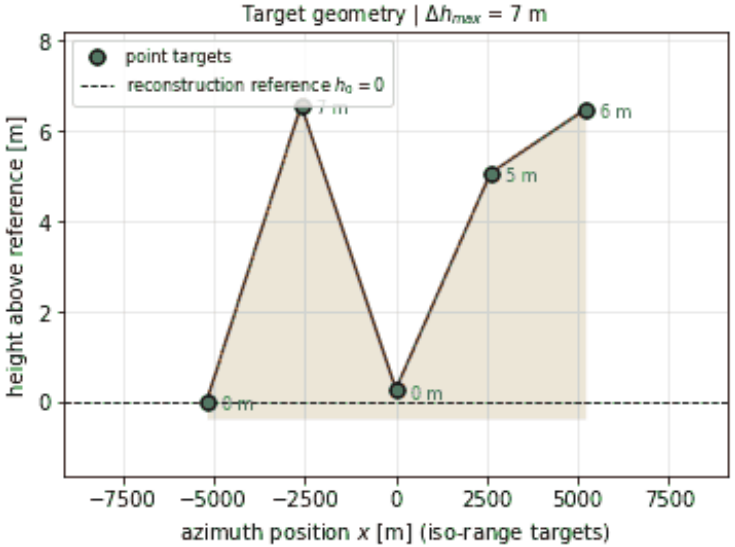





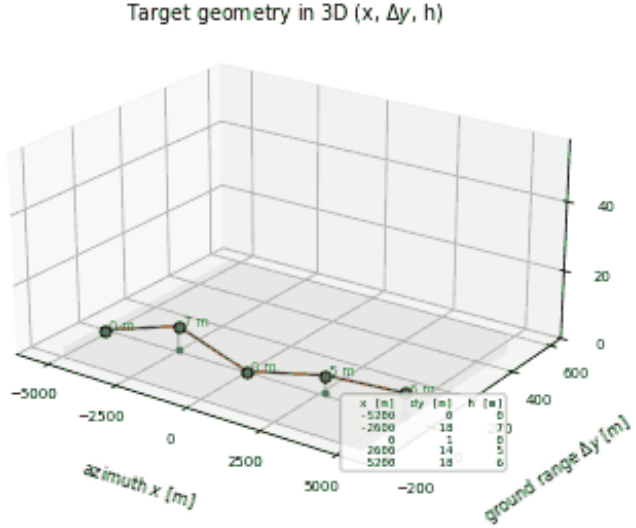



RH-NS-002 | SATA 1D | random heights: N = 5, heights $\sim U(0, 10)$ m, seed 1, targets 2.6 km apart (normal distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

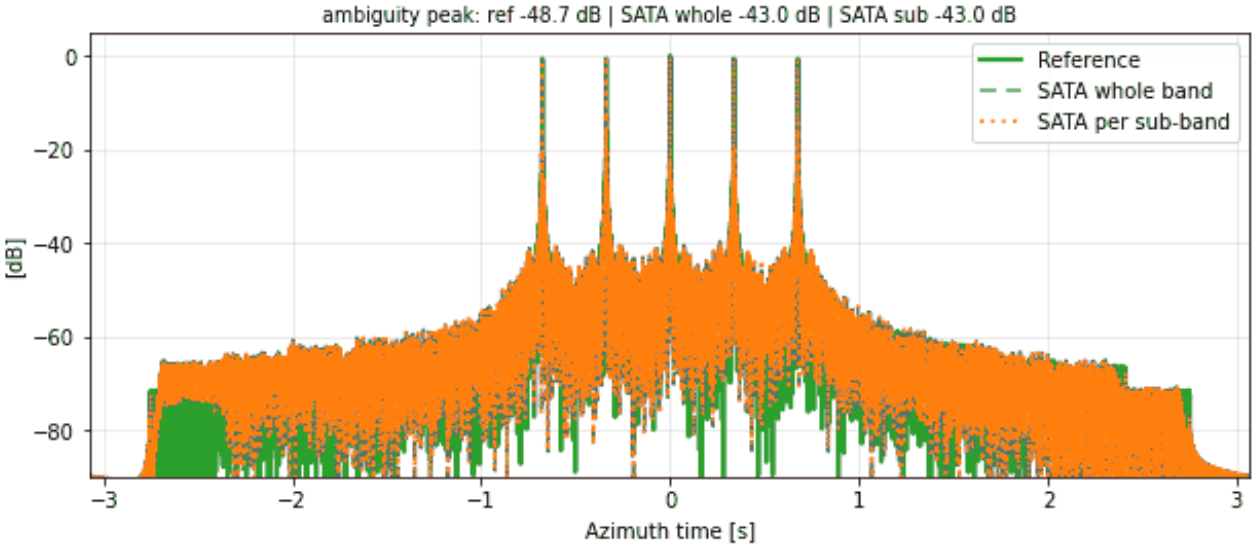


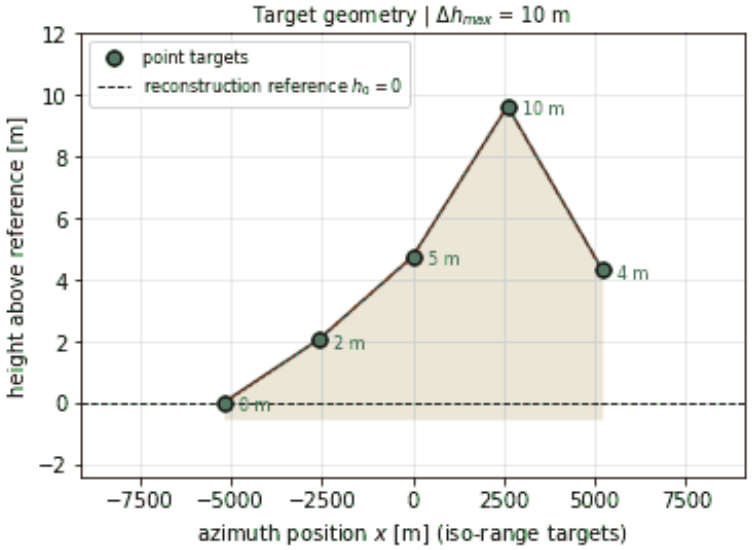


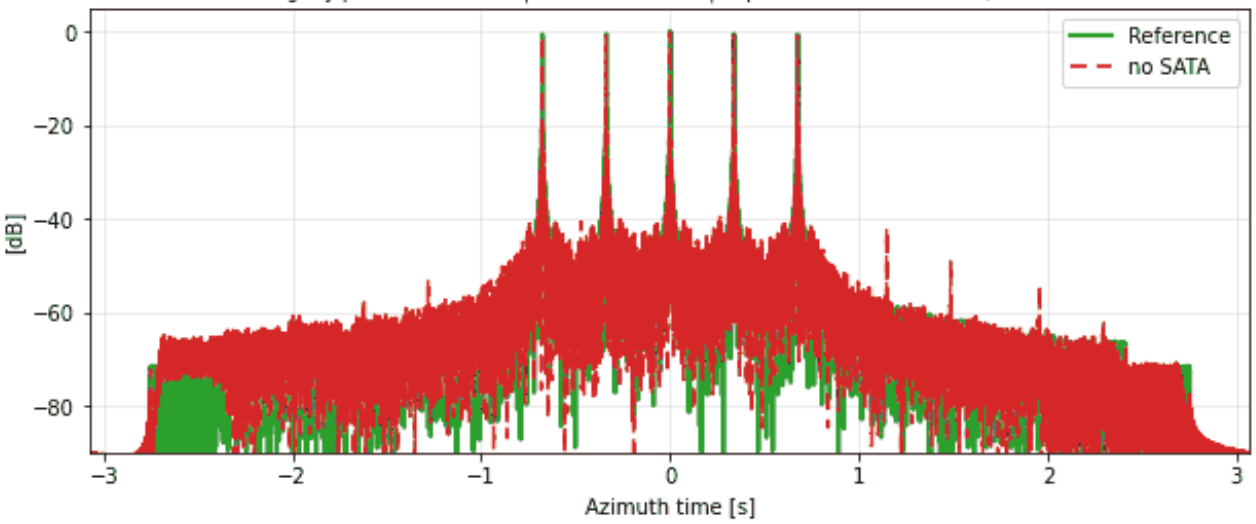

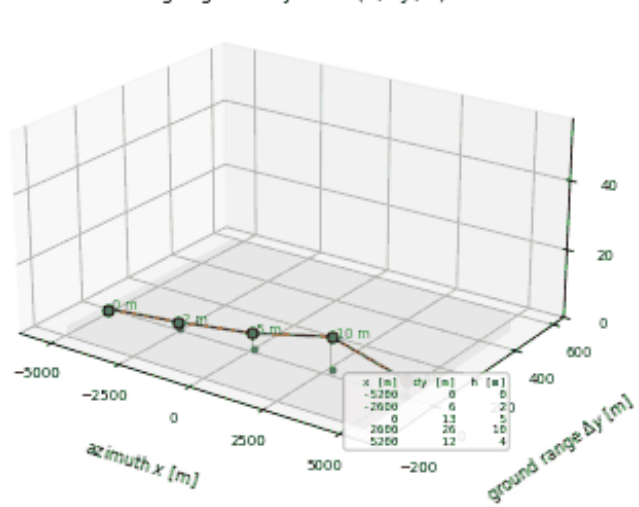


RH-NS-003 | SATA 1D | random heights: N = 5, heights $\sim U(0, 50)$ m, seed 0, targets 2.6 km apart (normal distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

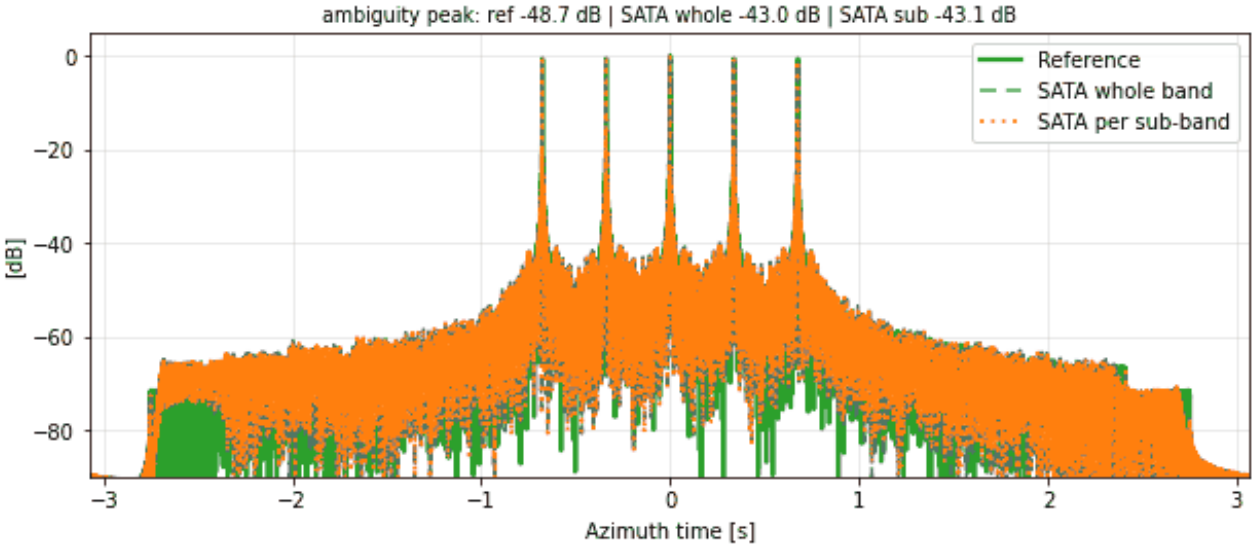

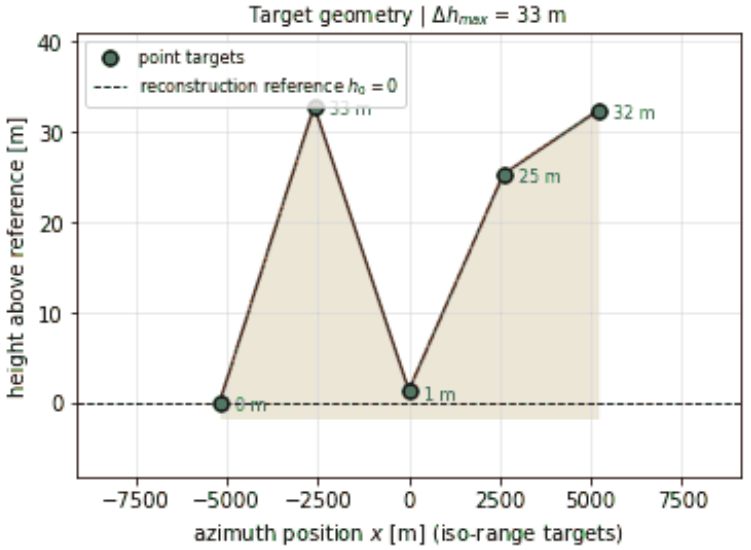





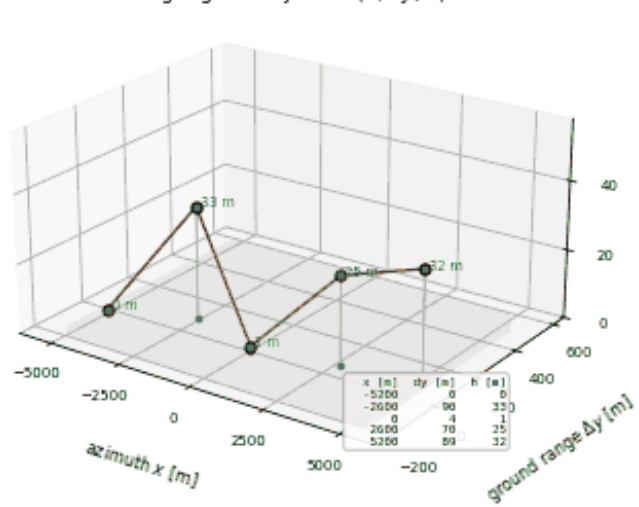


RH-NS-004 | SATA 1D | random heights: N = 5, heights $\sim U(0, 50)$ m, seed 1, targets 2.6 km apart (normal distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

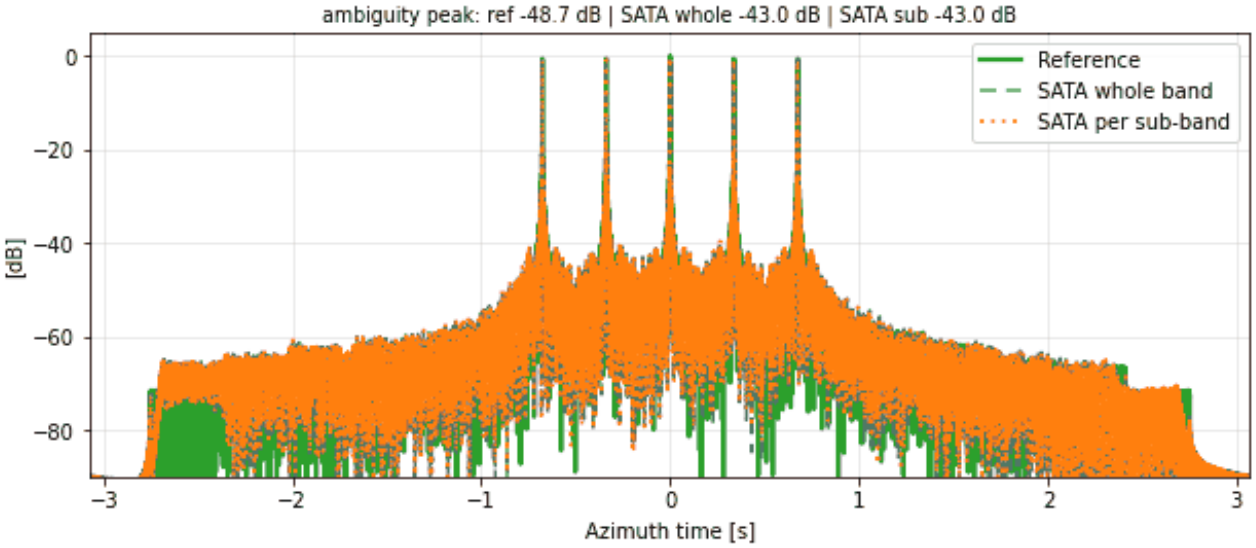

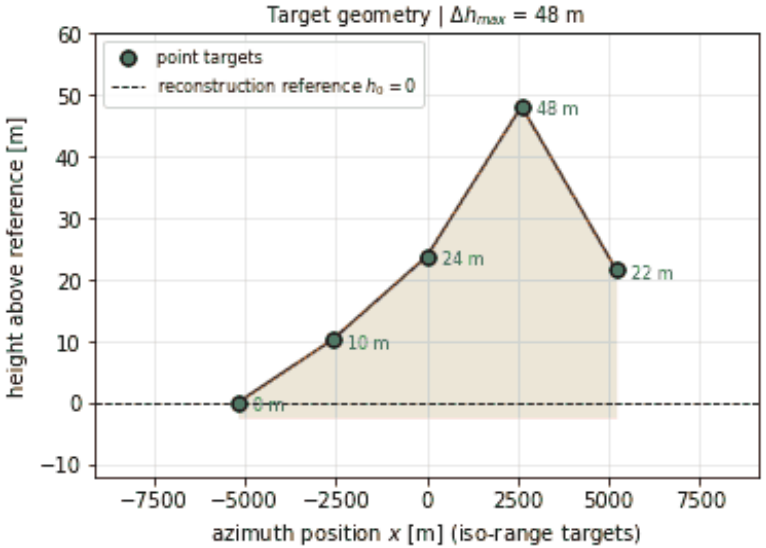





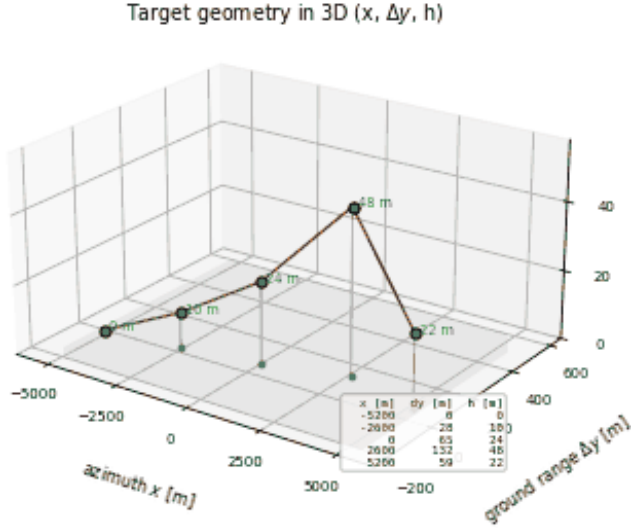



RH-NS-005 | SATA 1D | random heights: N = 5, heights $\sim U(0, 100)$ m, seed 0, targets 2.6 km apart (normal distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

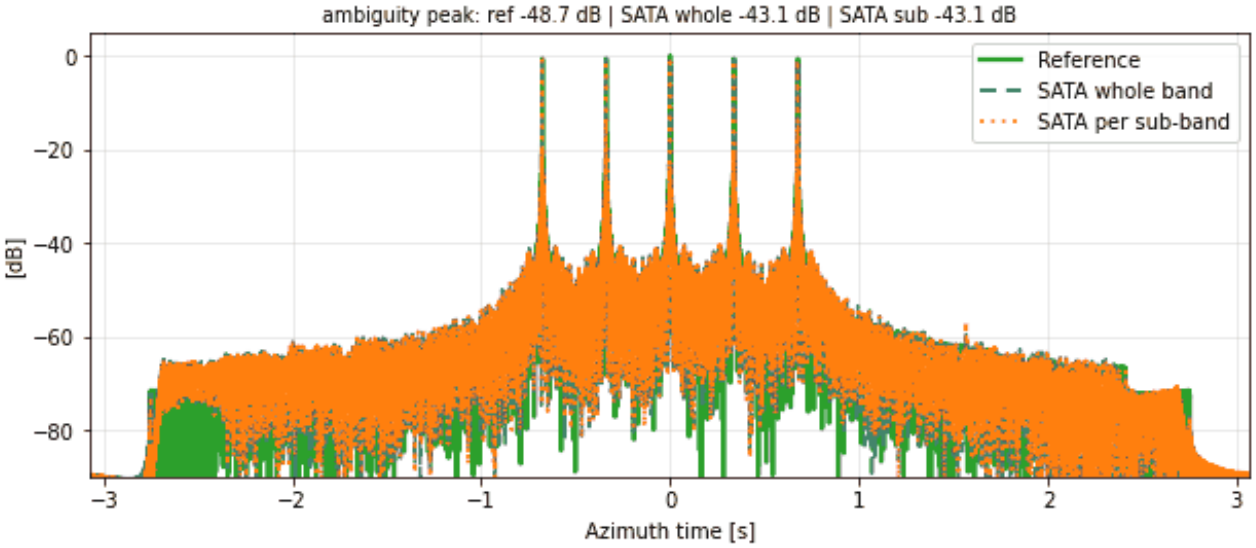

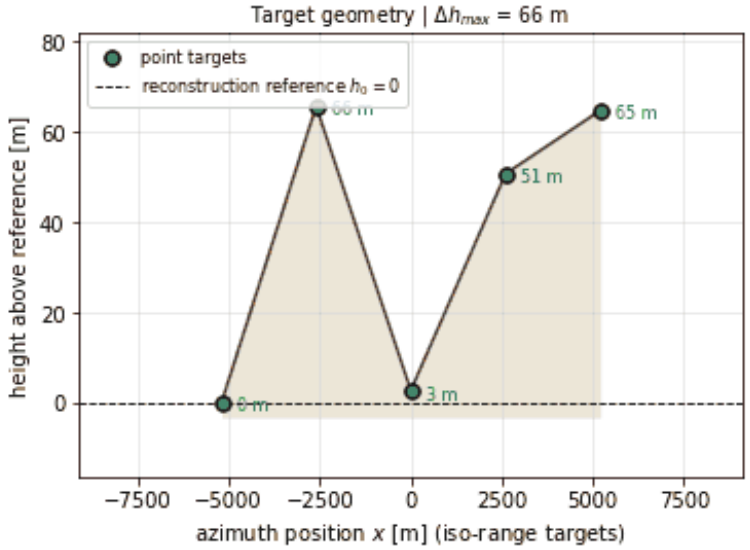


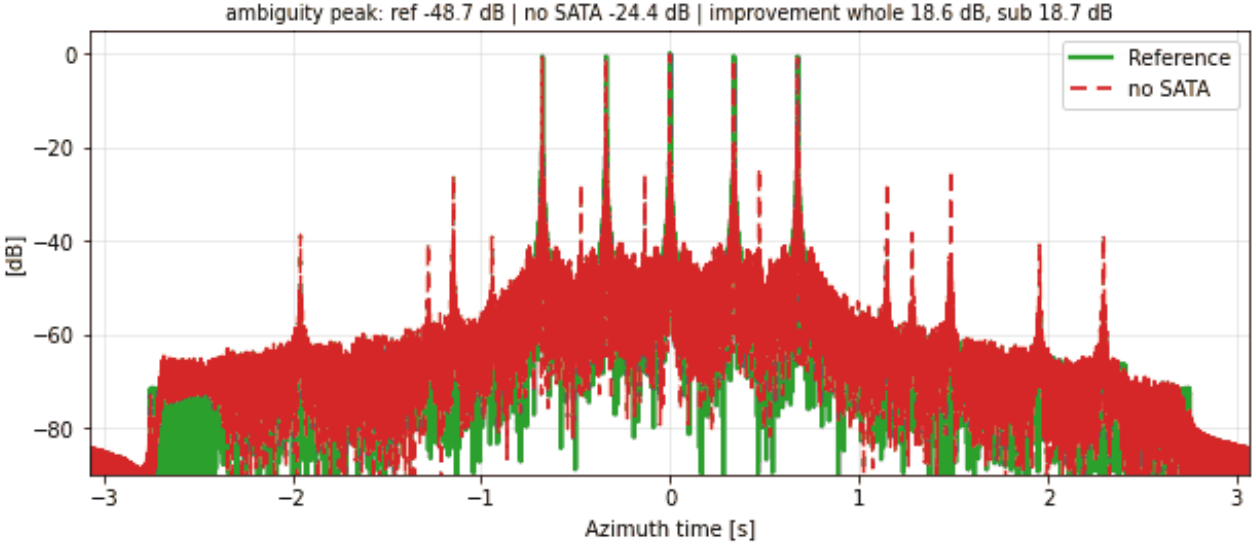


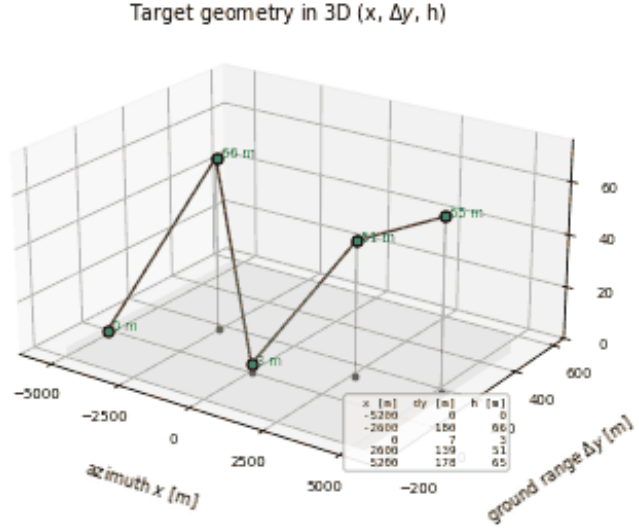



RH-NS-006 | SATA 1D | random heights: N = 5, heights $\sim U(0, 100)$ m, seed 1, targets 2.6 km apart (normal distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

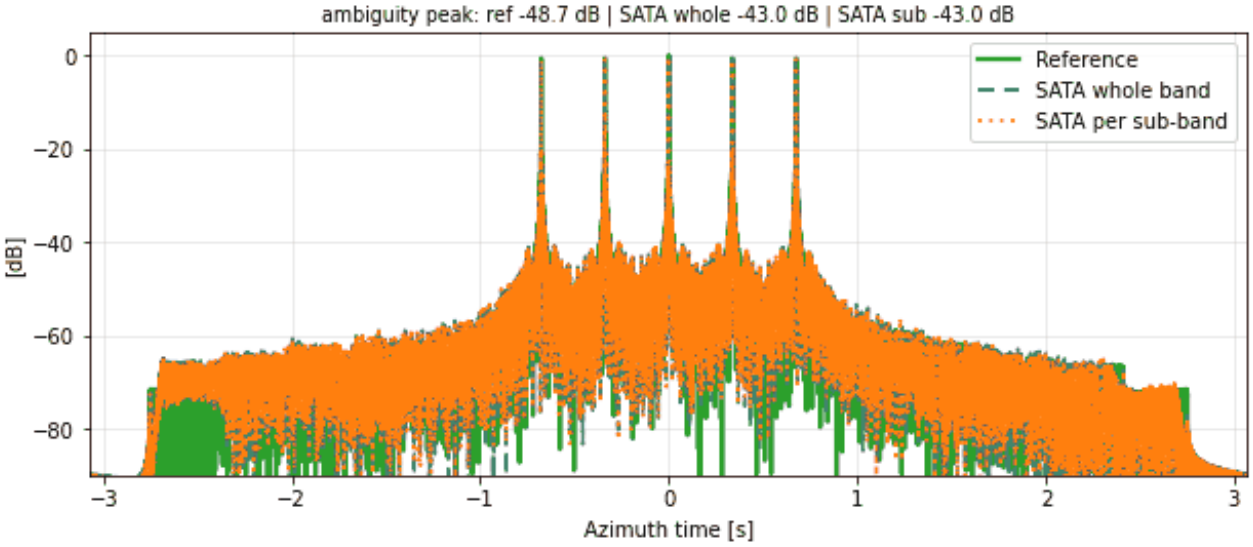


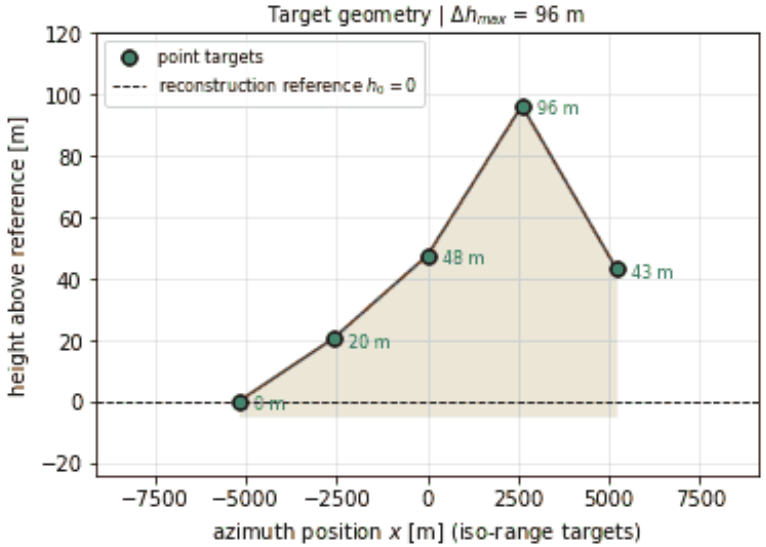


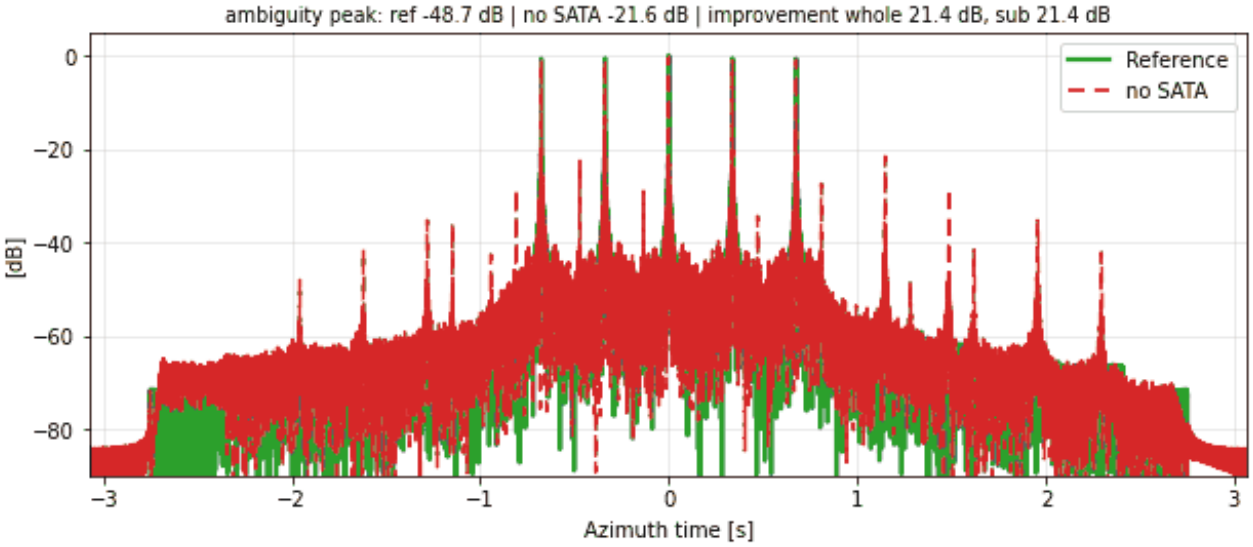


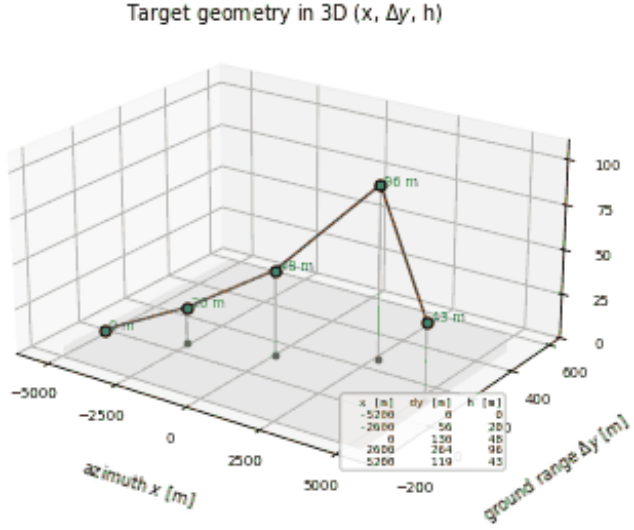


RH-NN-001 | SATA 1D | random heights: N = 5, heights $\sim U(0, 100)$ m, seed 0, targets 2.6 km apart (normal distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

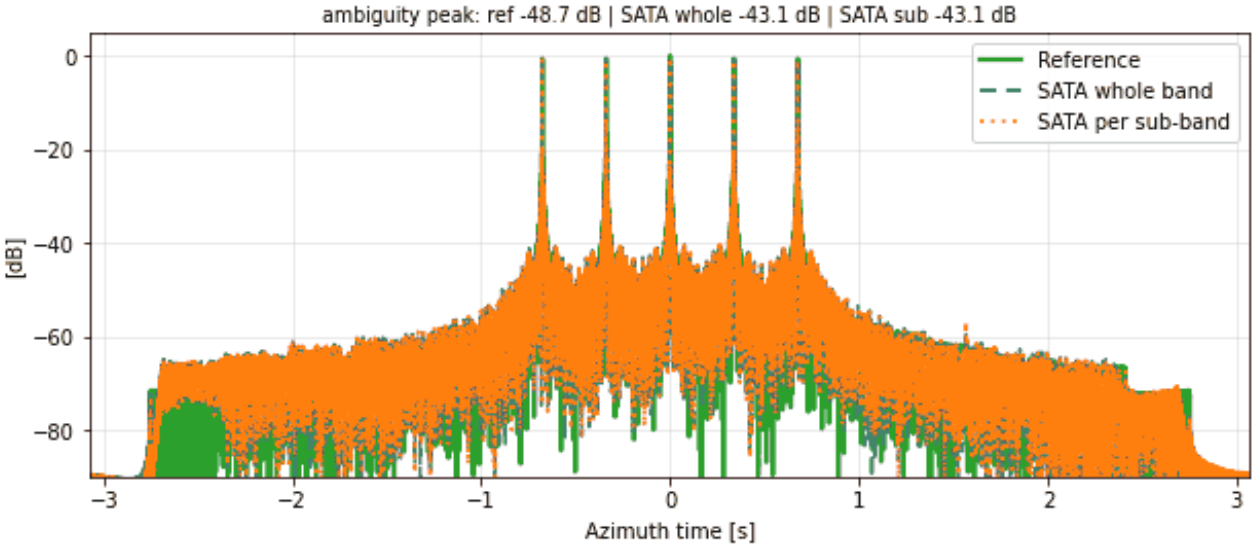

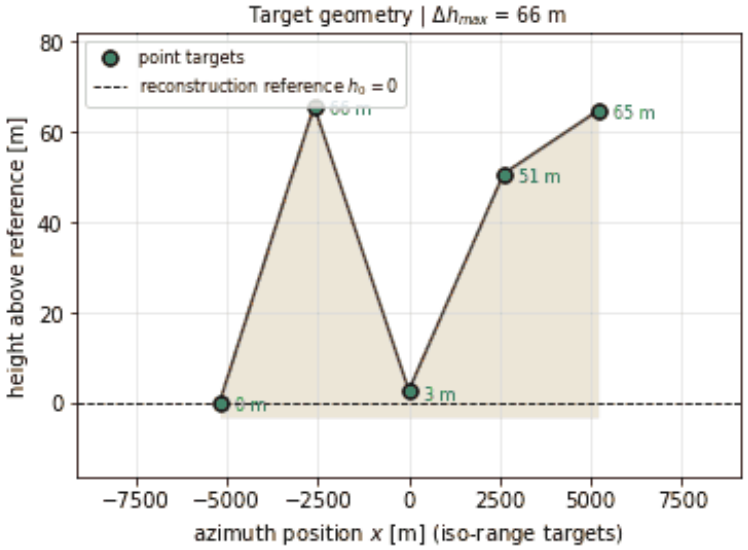


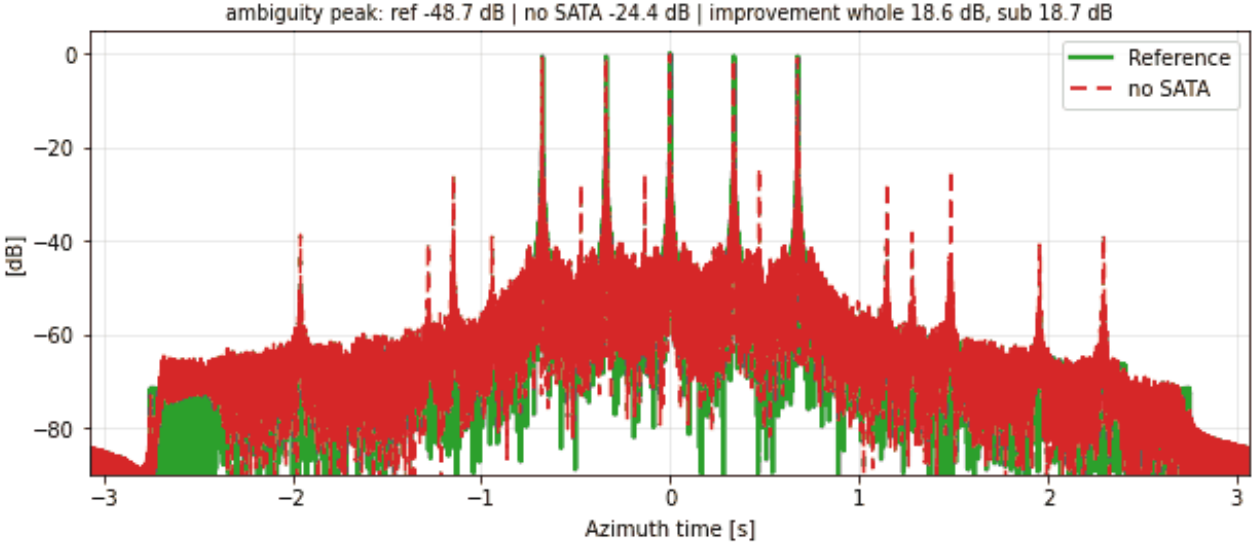


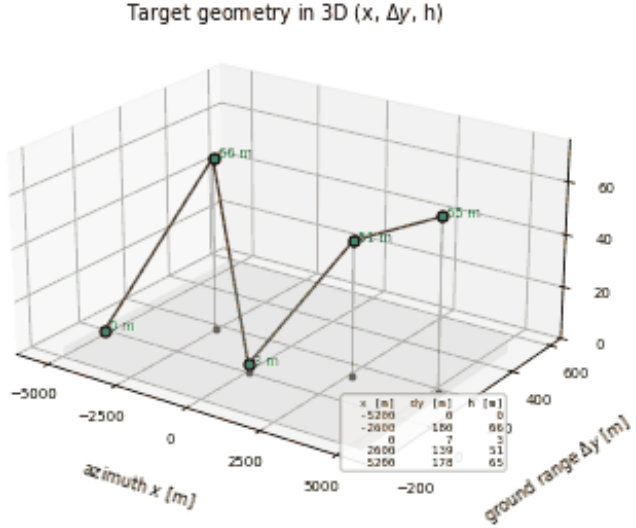



RH-NN-002 | SATA 1D | random heights: N = 5, heights $\sim U(0, 100)$ m, seed 1, targets 2.6 km apart (normal distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

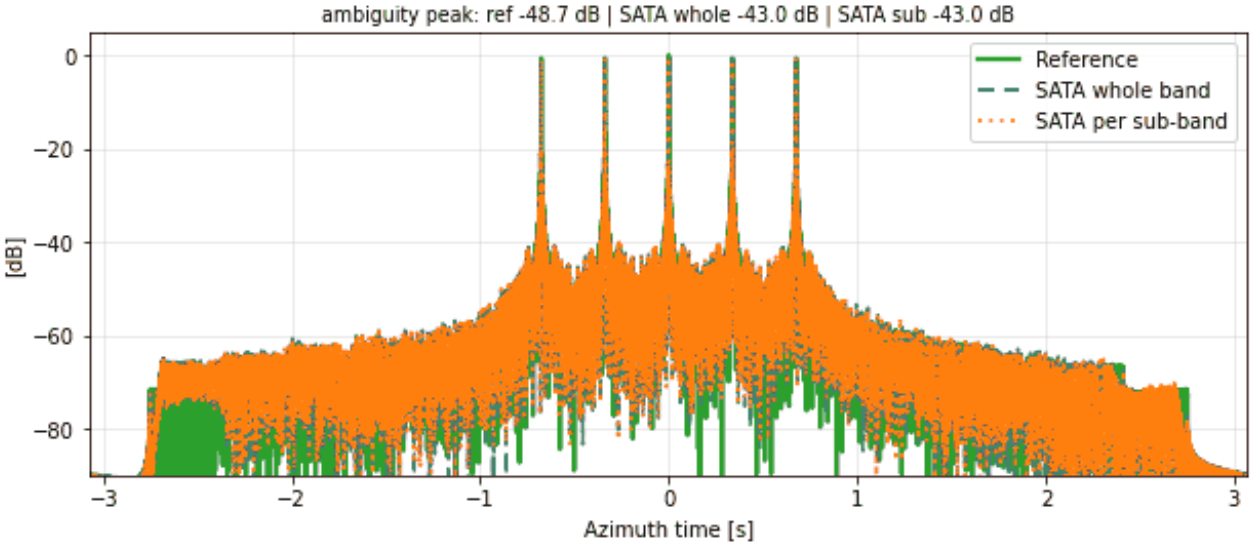

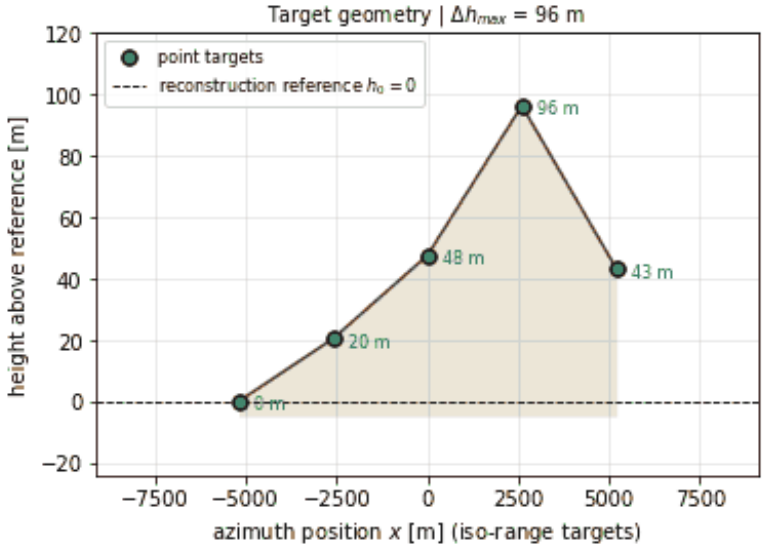


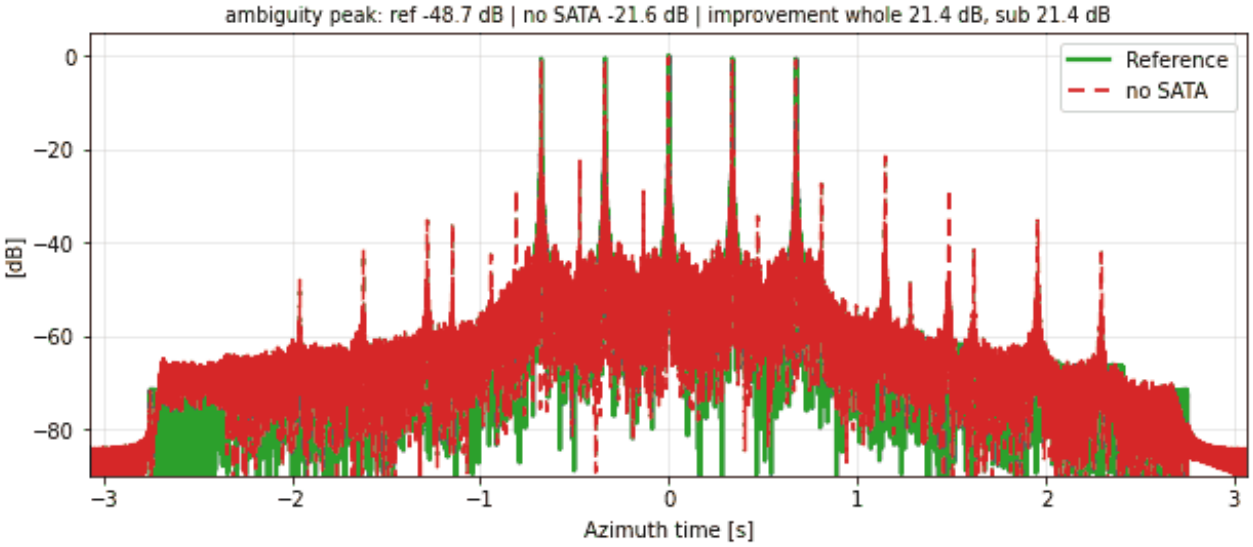


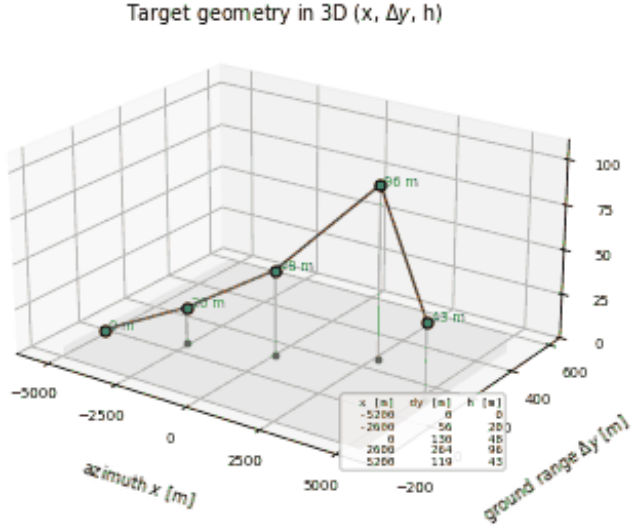



RH-NN-003 | SATA 1D | random heights: N = 5, heights $\sim U(0, 500)$ m, seed 0, targets 2.6 km apart (normal distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

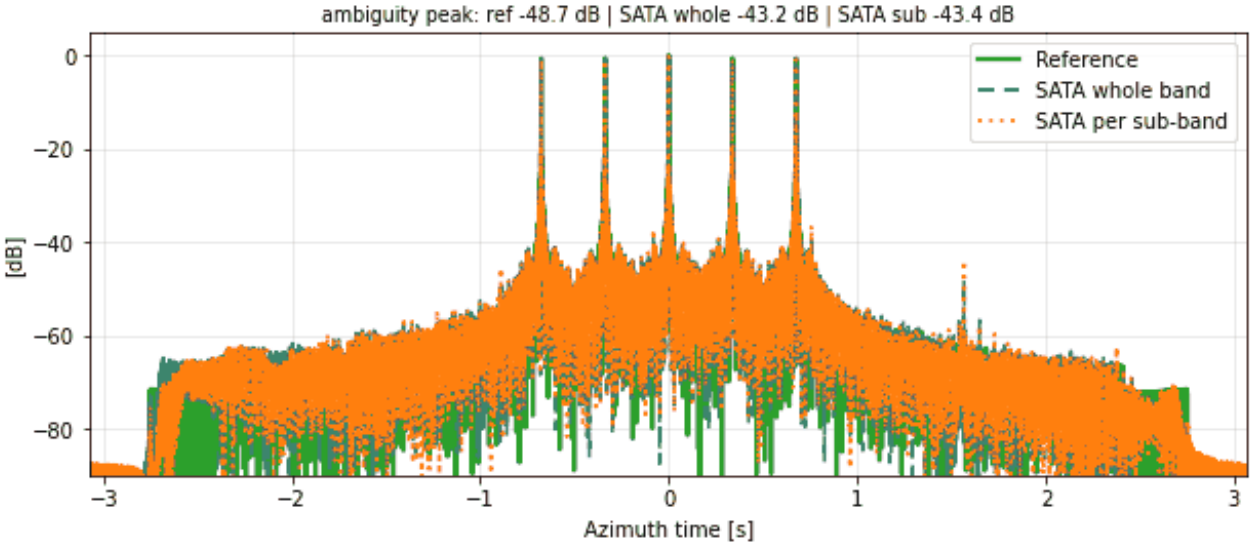

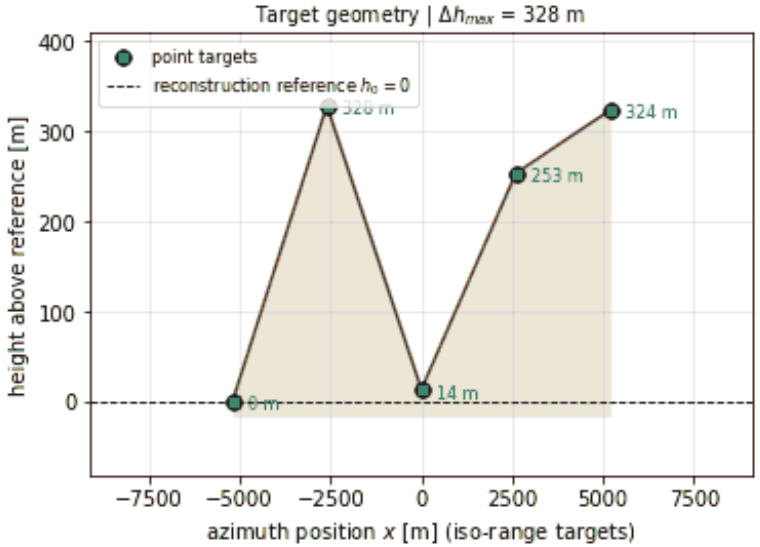


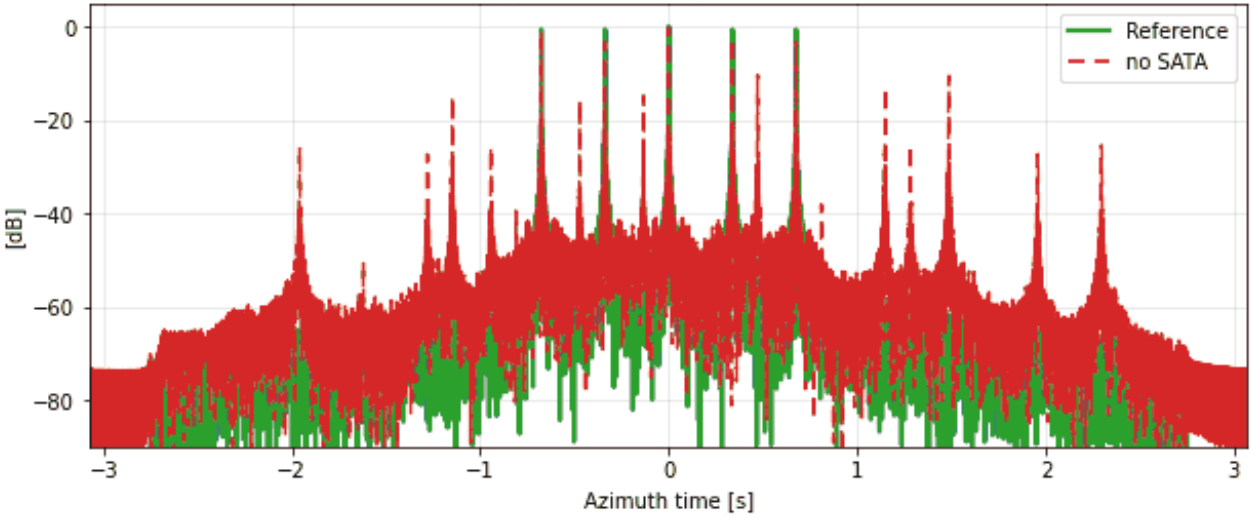


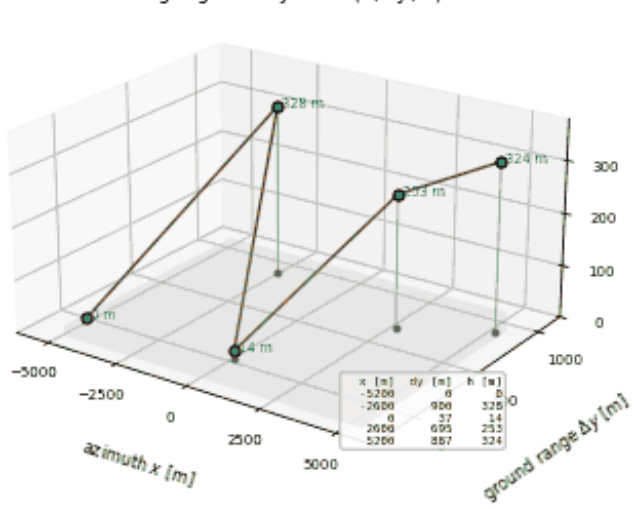



RH-NN-004 | SATA 1D | random heights: N = 5, heights $\sim U(0, 500)$ m, seed 1, targets 2.6 km apart (normal distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

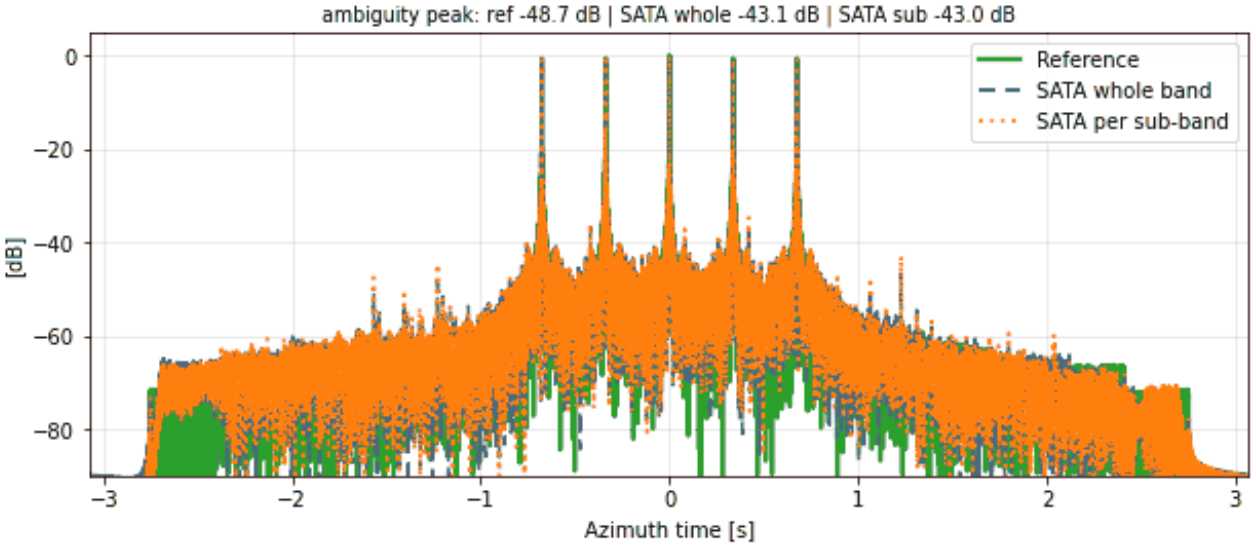

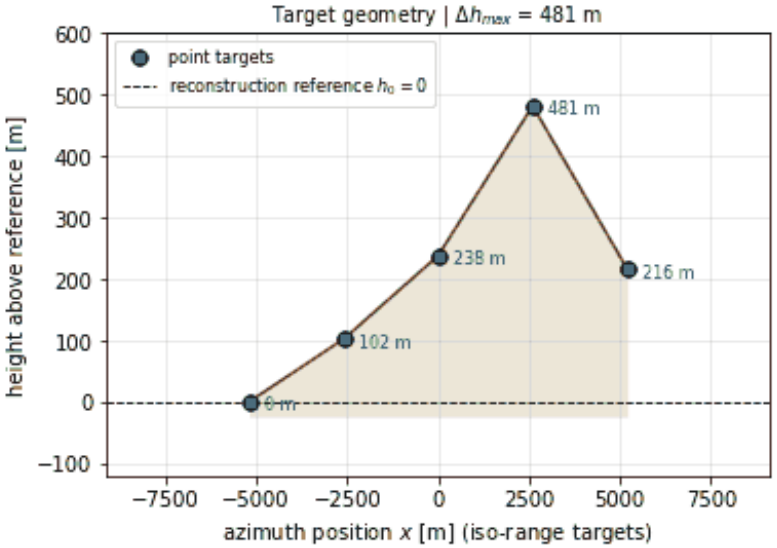


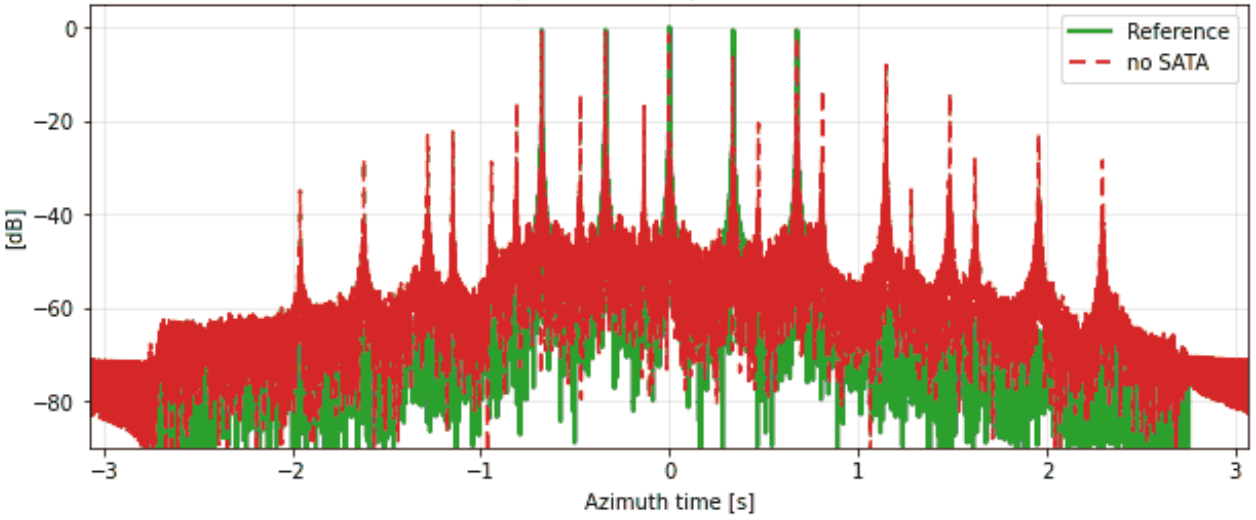


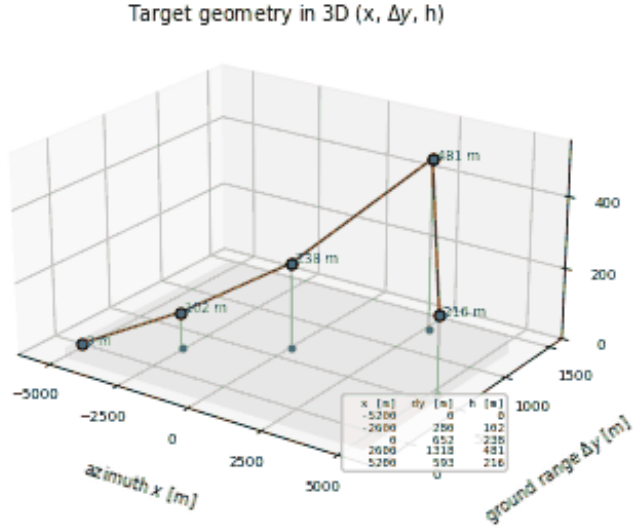



RH-NN-005 | SATA 1D | random heights: N = 5, heights $\sim U(0, 1000)$ m, seed 0, targets 2.6 km apart (normal distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

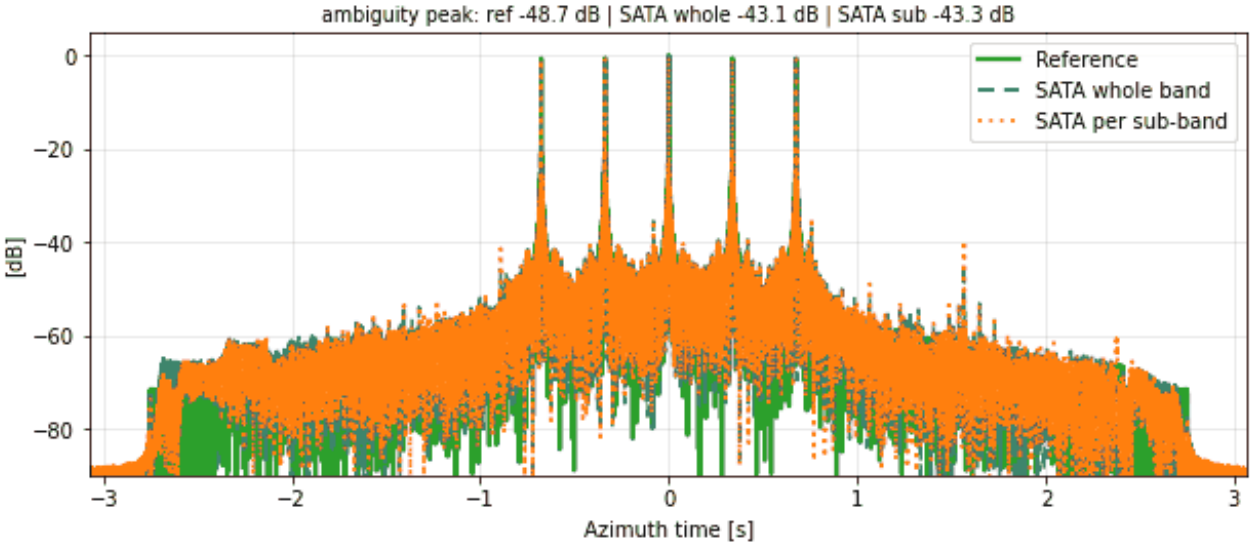


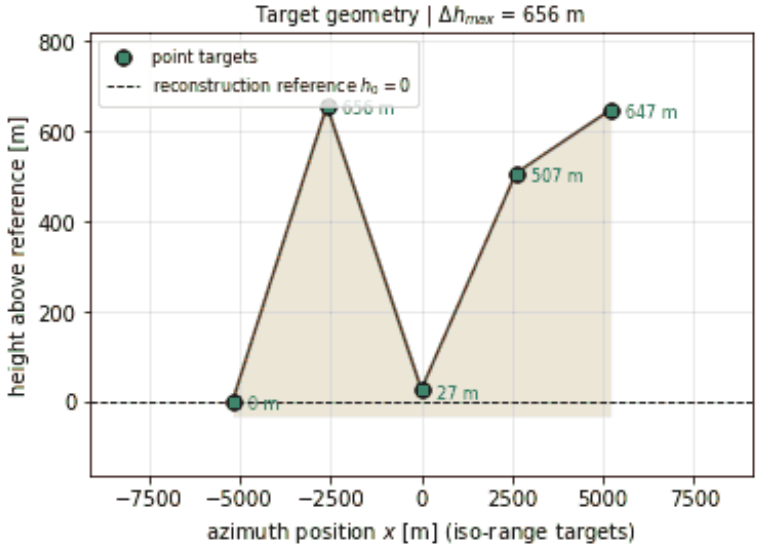


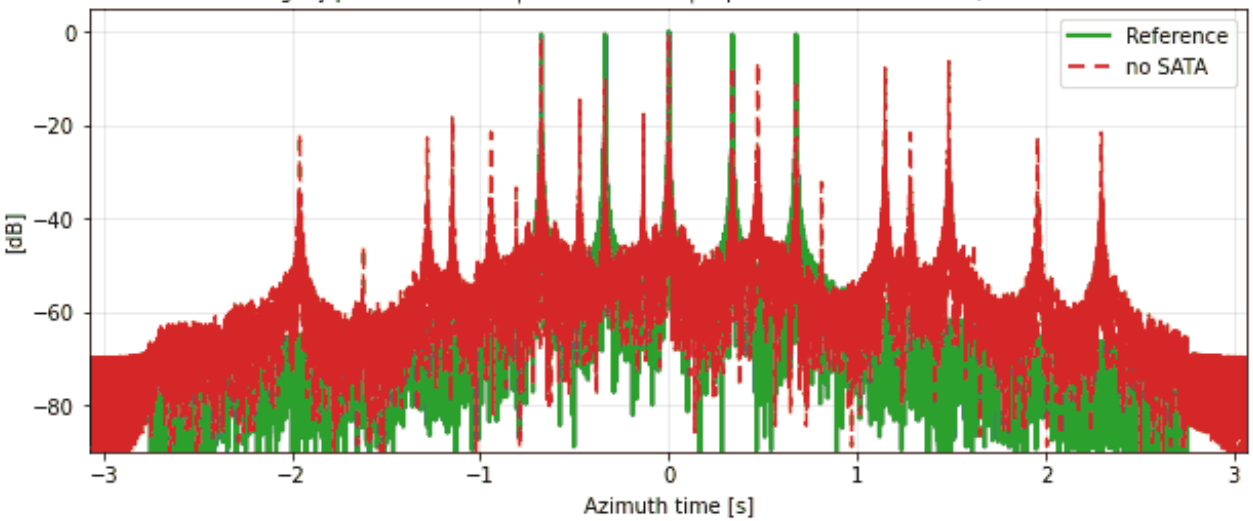


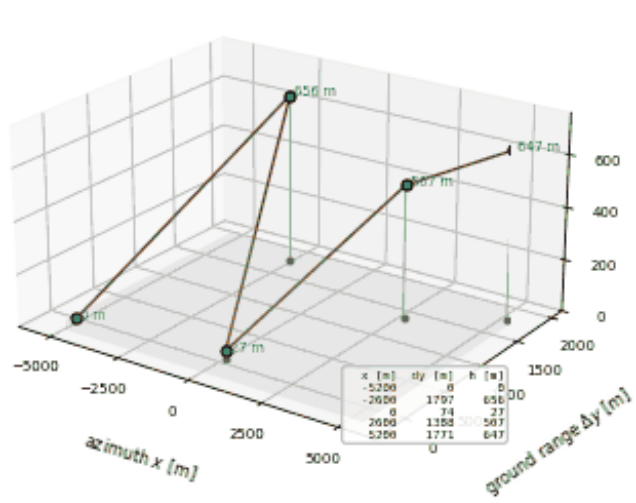


RH-NN-006 | SATA 1D | random heights: N = 5, heights $\sim U(0, 1000)$ m, seed 1, targets 2.6 km apart (normal distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

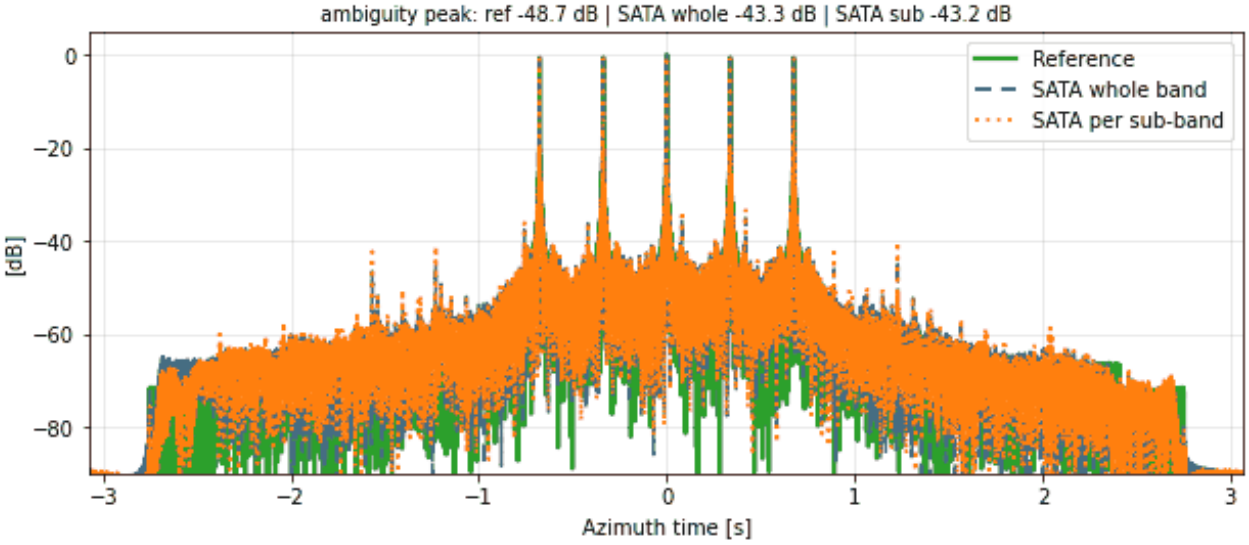

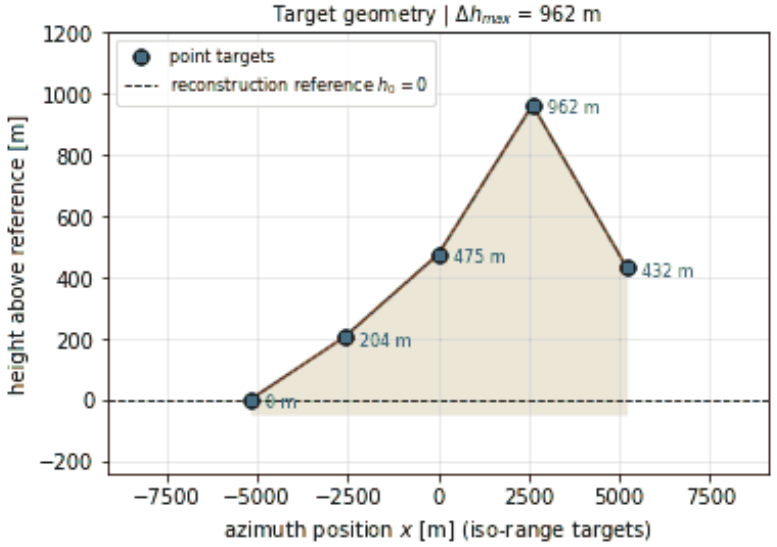


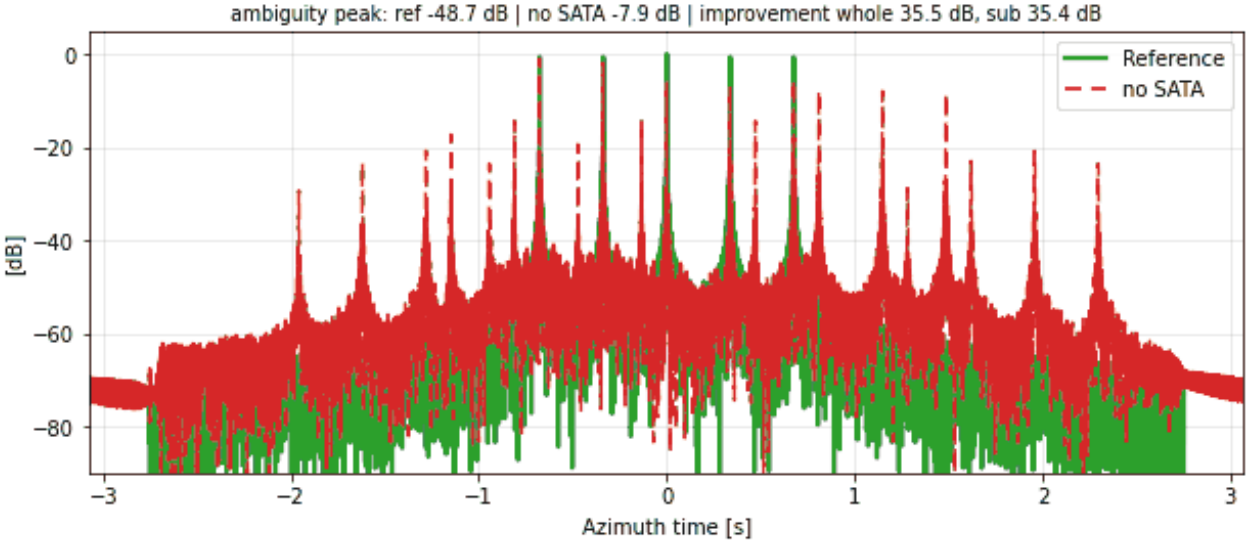


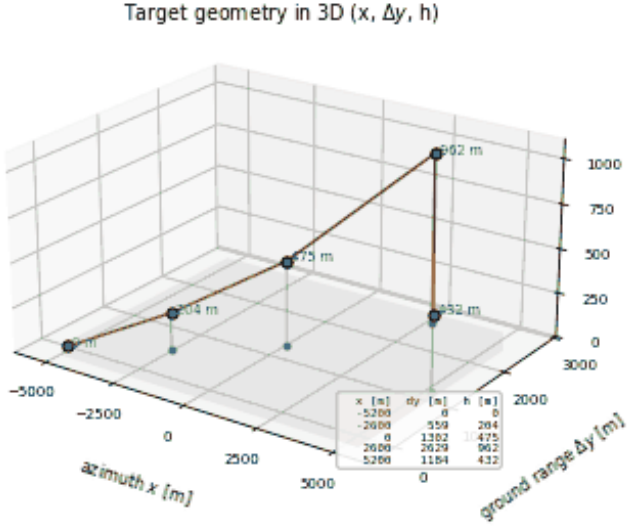



RH-NL-001 | SATA 1D | random heights: N = 5, heights $\sim U(0, 1300)$ m, seed 0, targets 2.6 km apart (normal distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

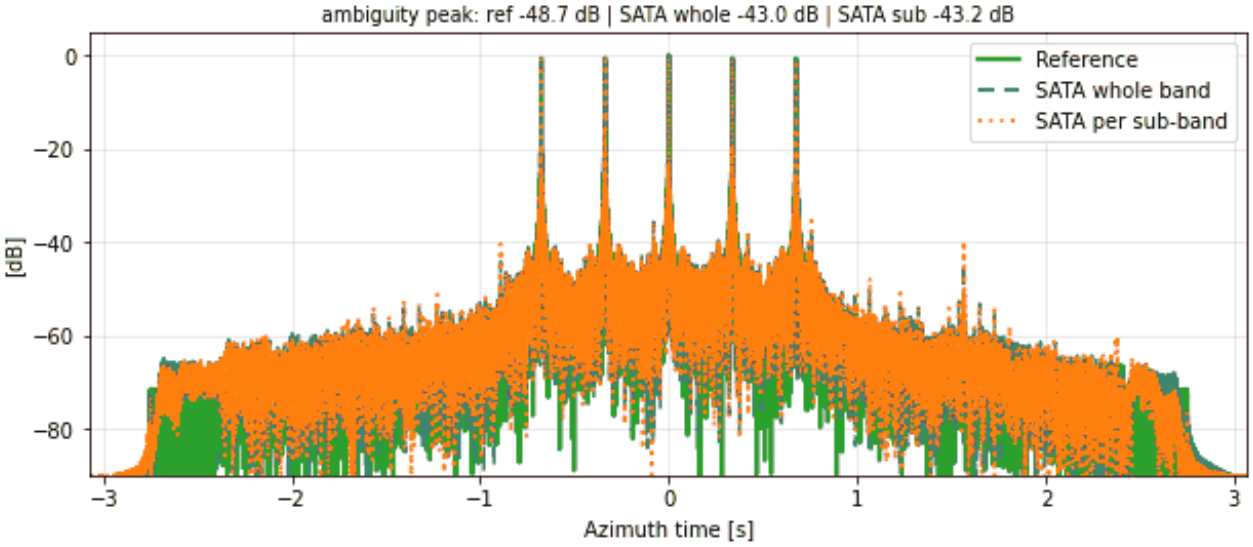


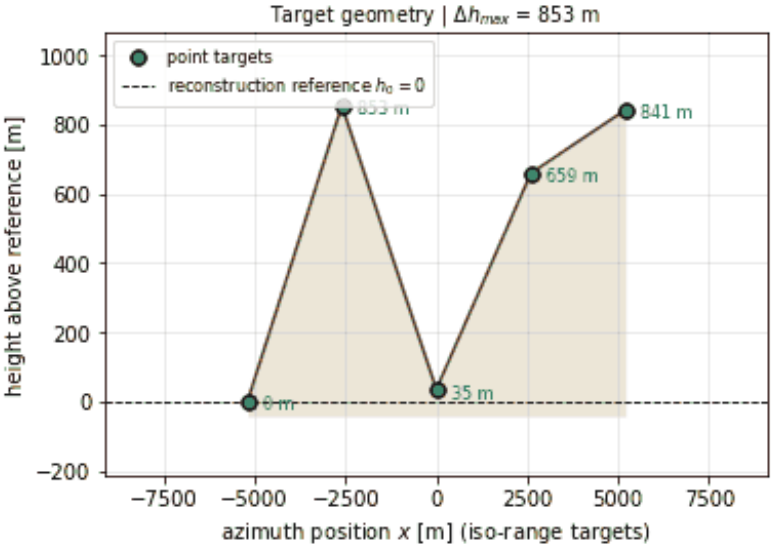


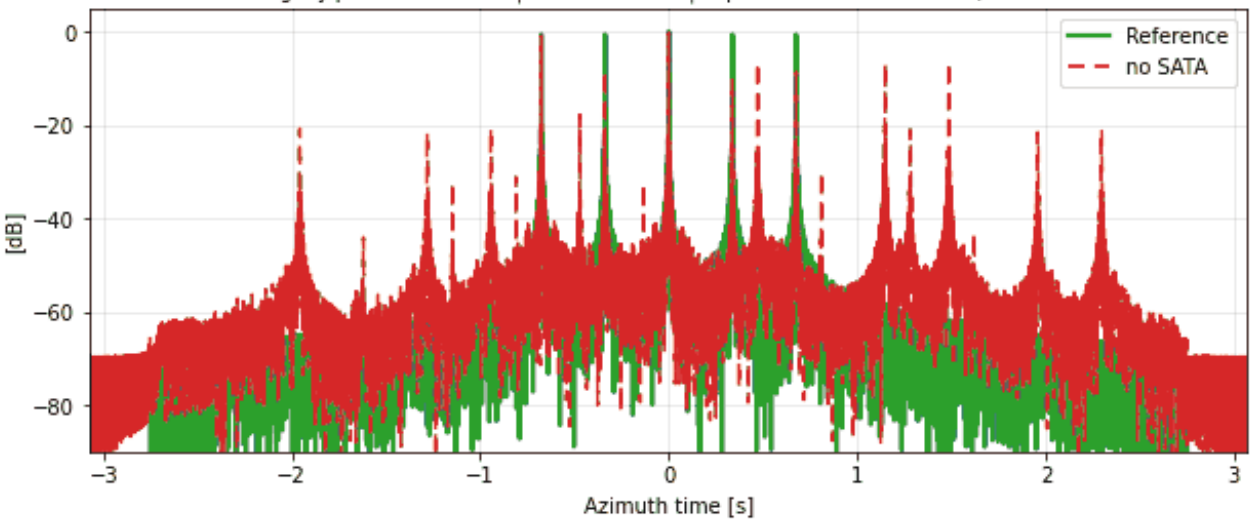


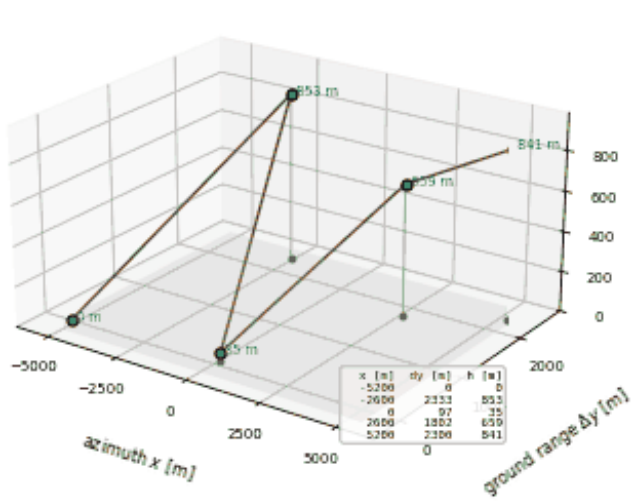


RH-NL-002 | SATA 1D | random heights: N = 5, heights $\sim U(0, 1300)$ m, seed 1, targets 2.6 km apart (normal distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

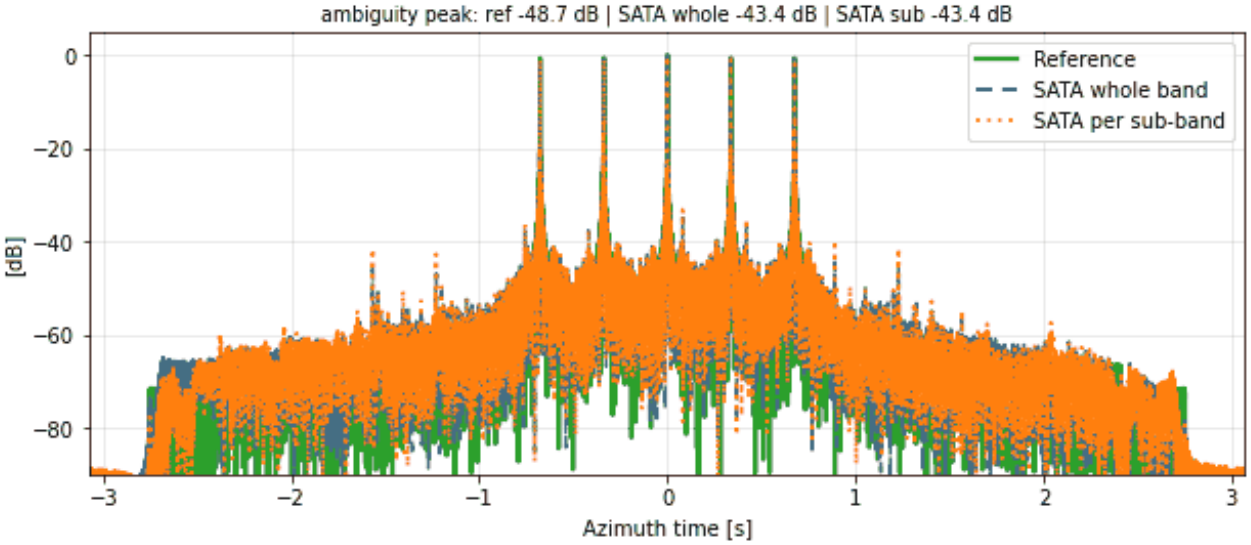

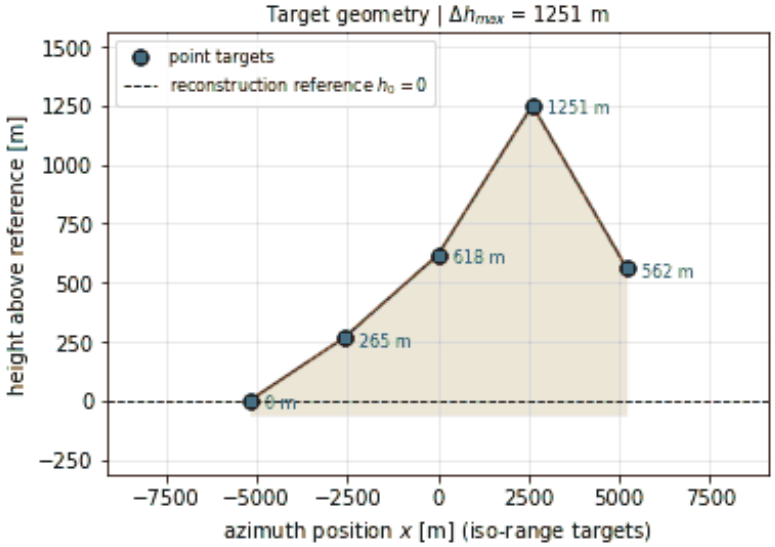


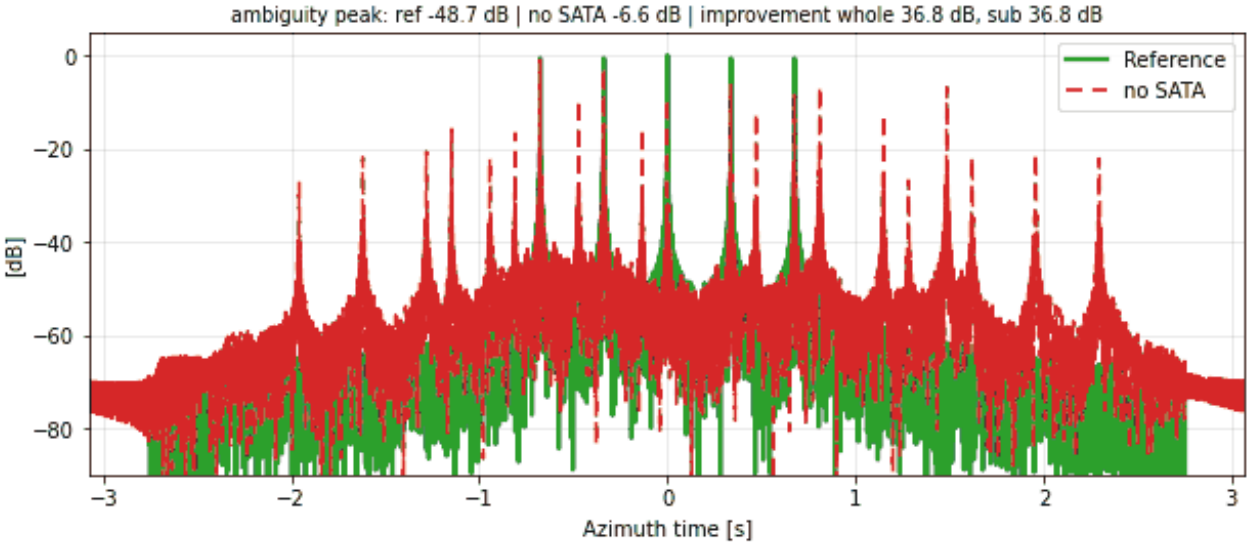


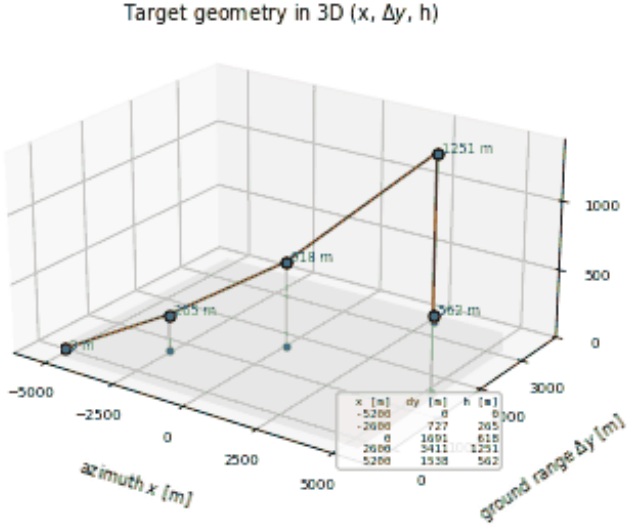



RH-NL-003 | SATA 1D | random heights: N = 5, heights $\sim U(0, 6500)$ m, seed 0, targets 2.6 km apart (normal distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

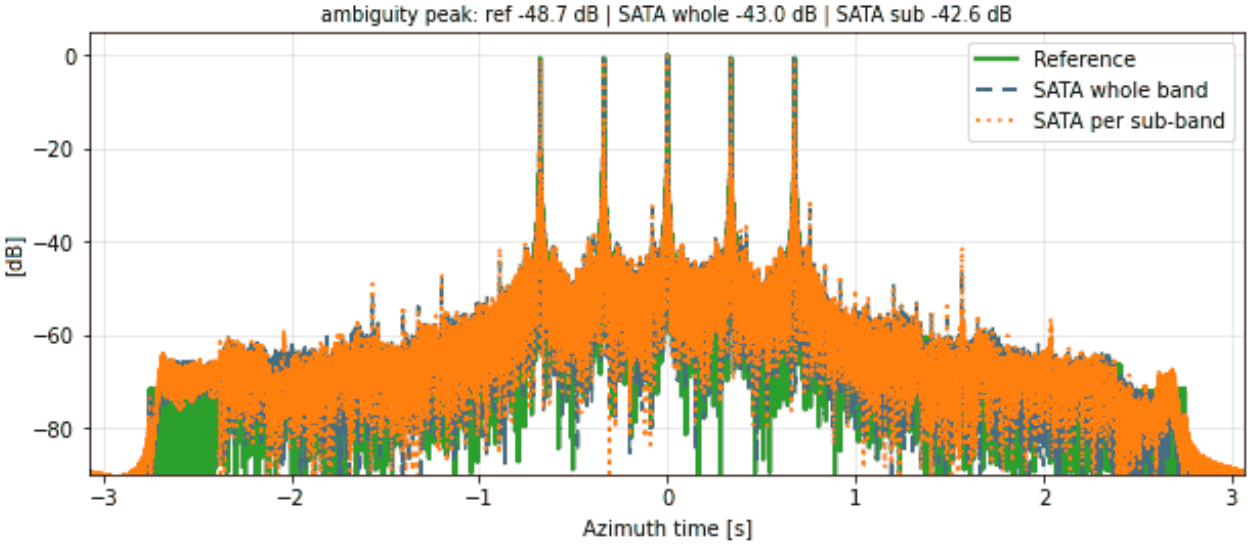


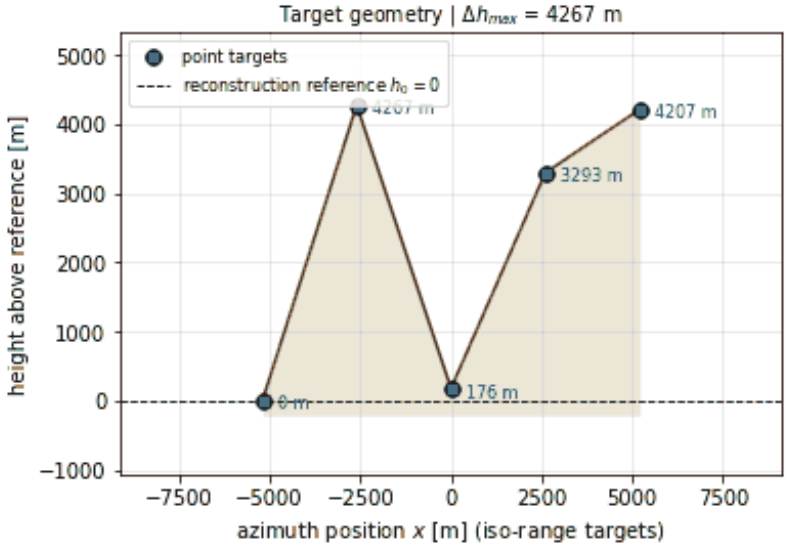


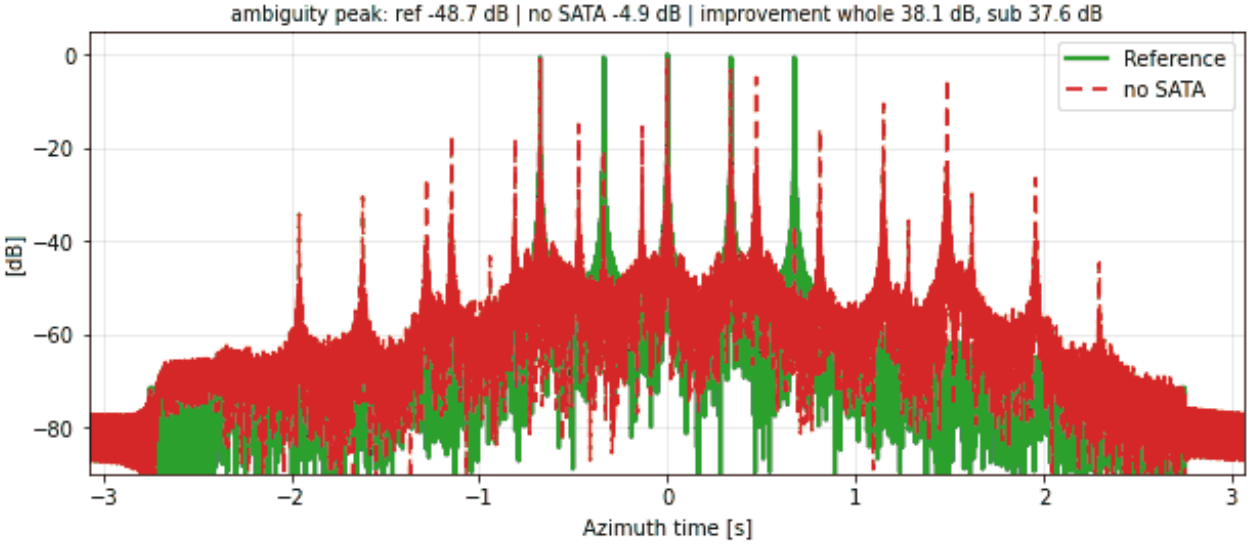


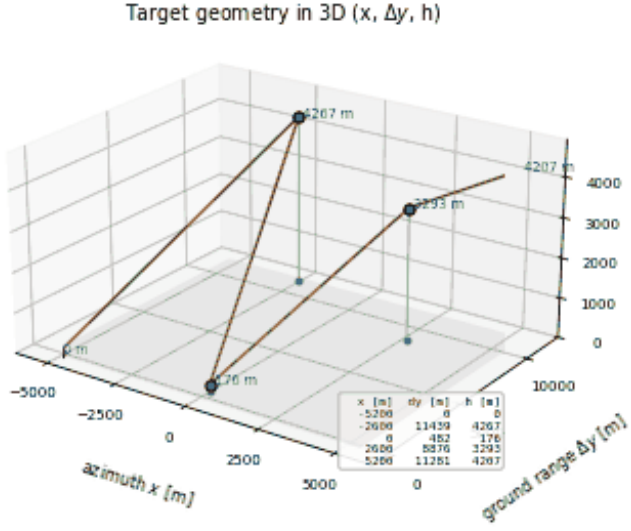


RH-NL-004 | SATA 1D | random heights: N = 5, heights $\sim U(0, 6500)$ m, seed 1, targets 2.6 km apart (normal distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

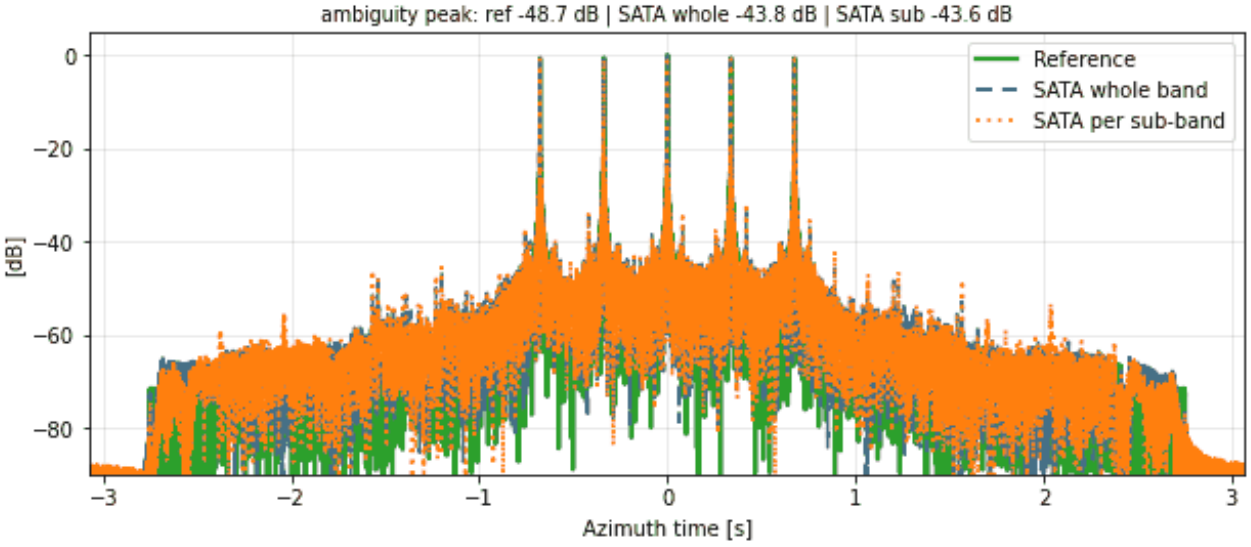

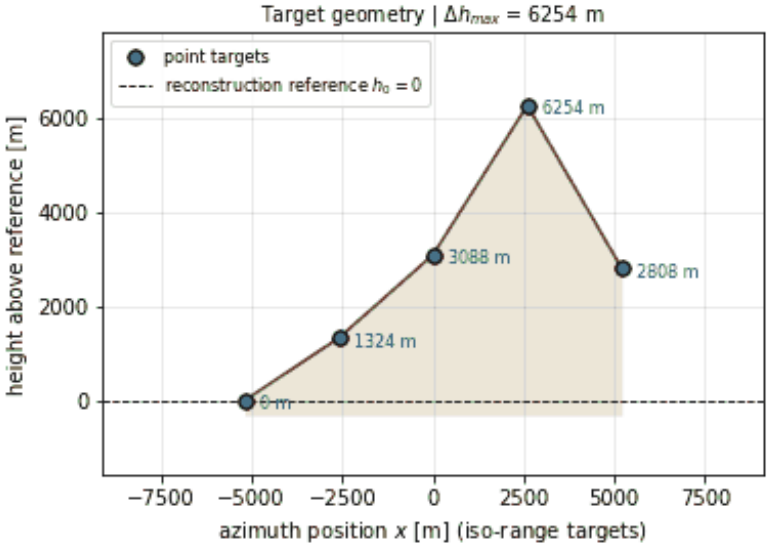


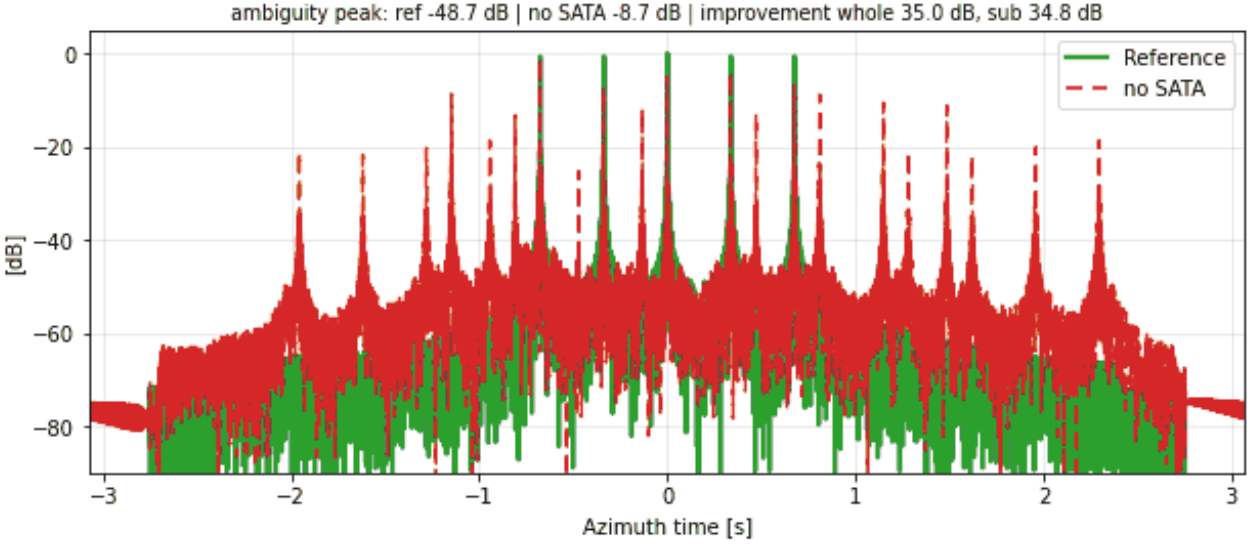


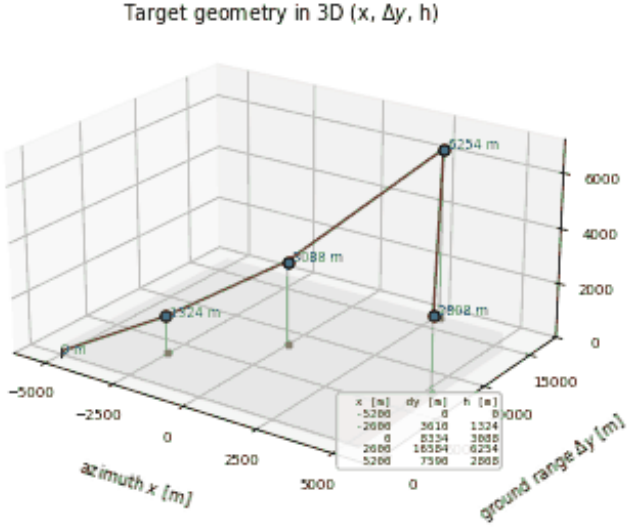



RH-NL-005 | SATA 1D | random heights: N = 5, heights $\sim U(0, 13000)$ m, seed 0, targets 2.6 km apart (normal distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

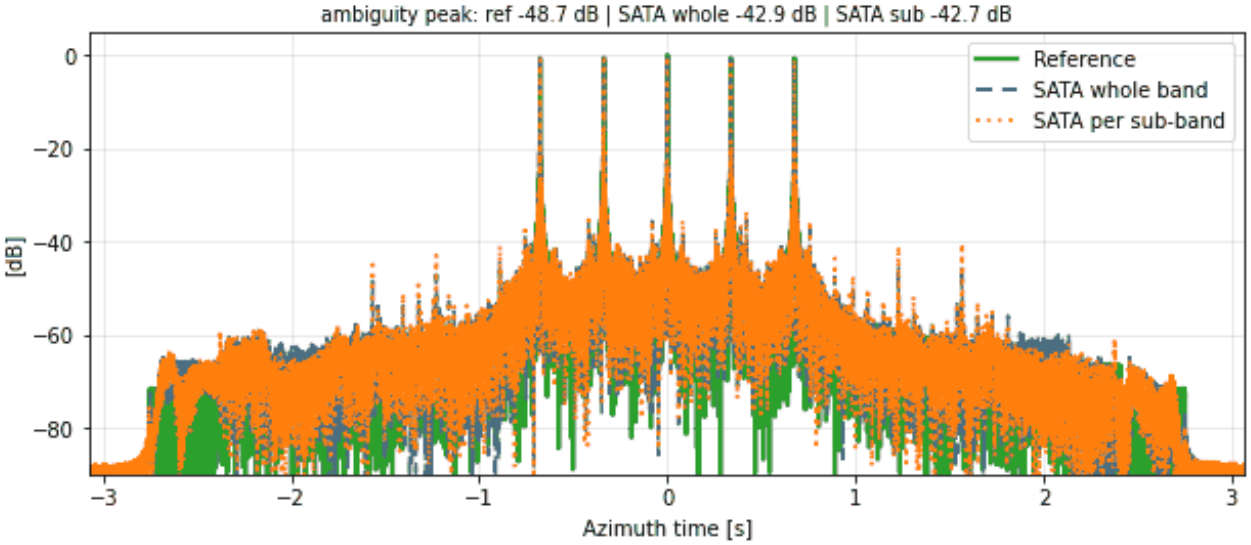

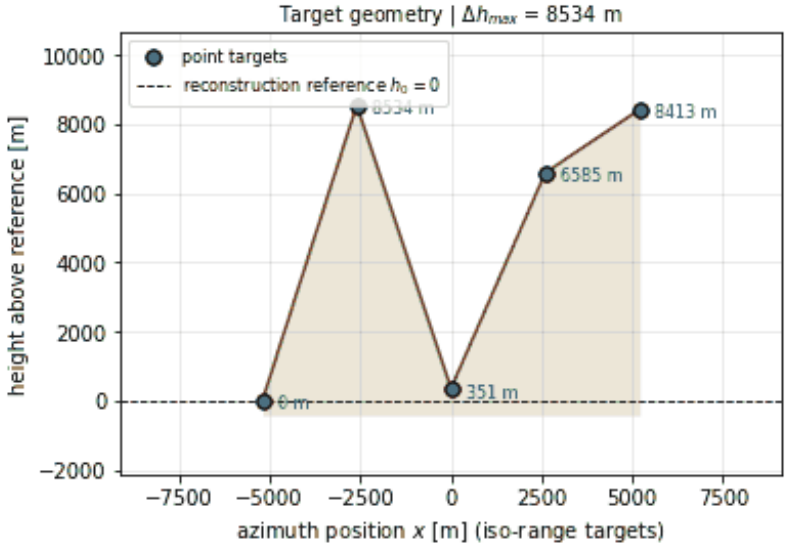


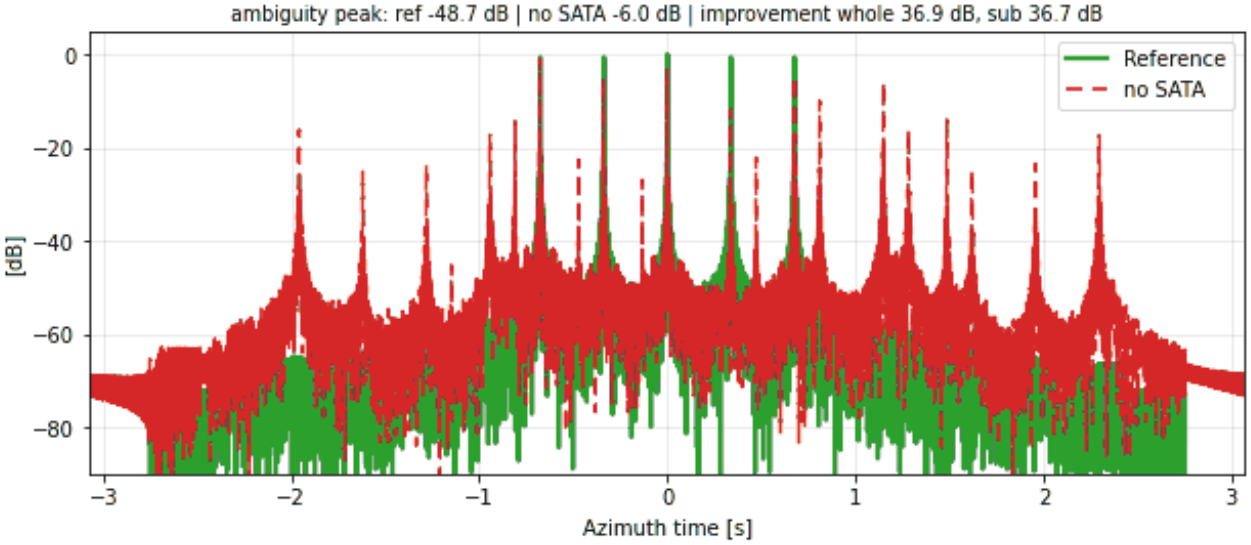


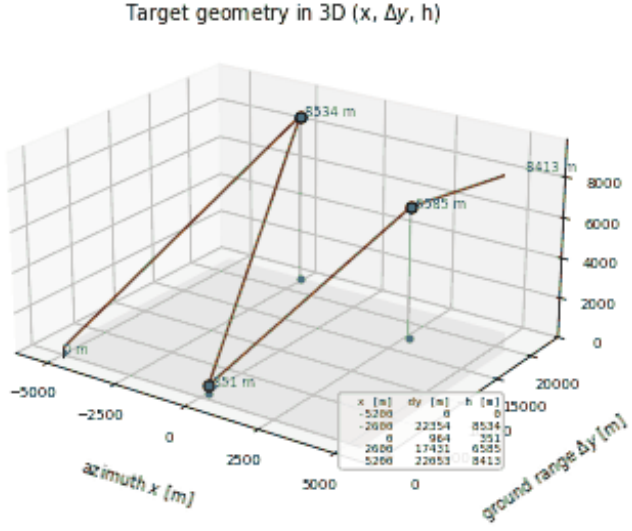


RH-NL-006 | SATA 1D | random heights: N = 5, heights $\sim U(0, 13000)$ m, seed 1, targets 2.6 km apart (normal distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

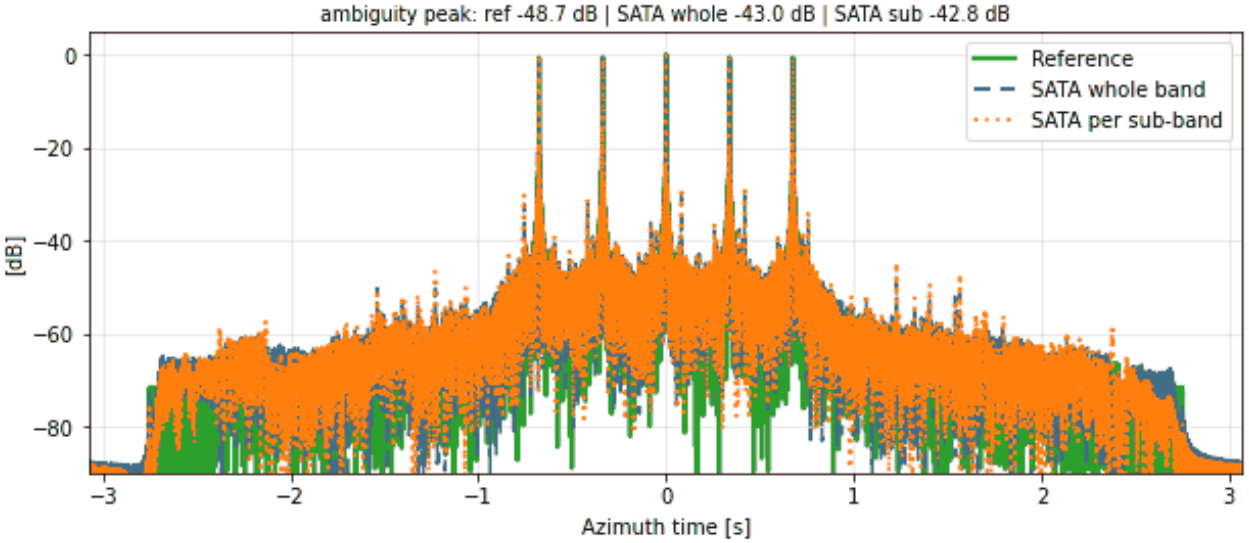

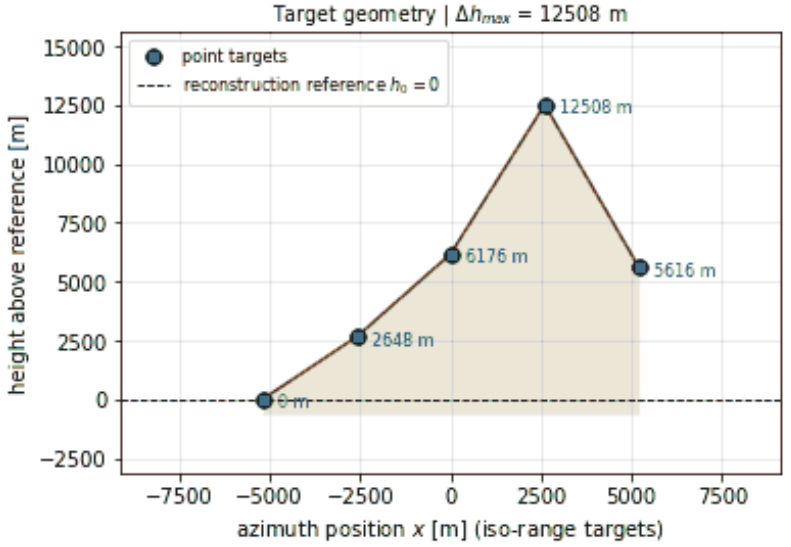





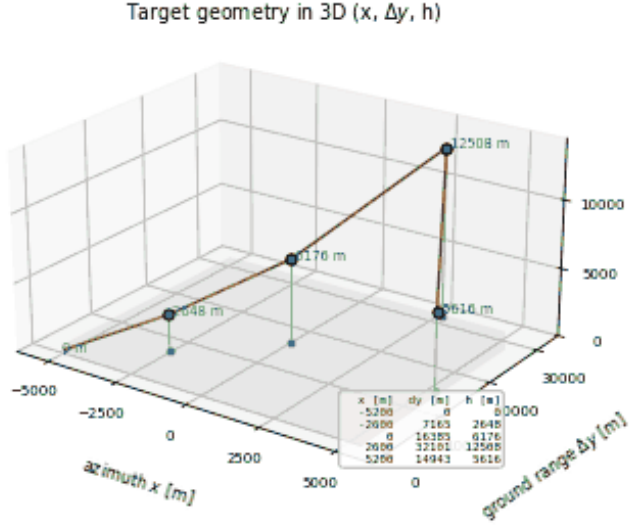



RH-LS-001 | SATA 1D | random heights: N = 5, heights $\sim U(0,10)$ m, seed 0, targets 10 km apart (large distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

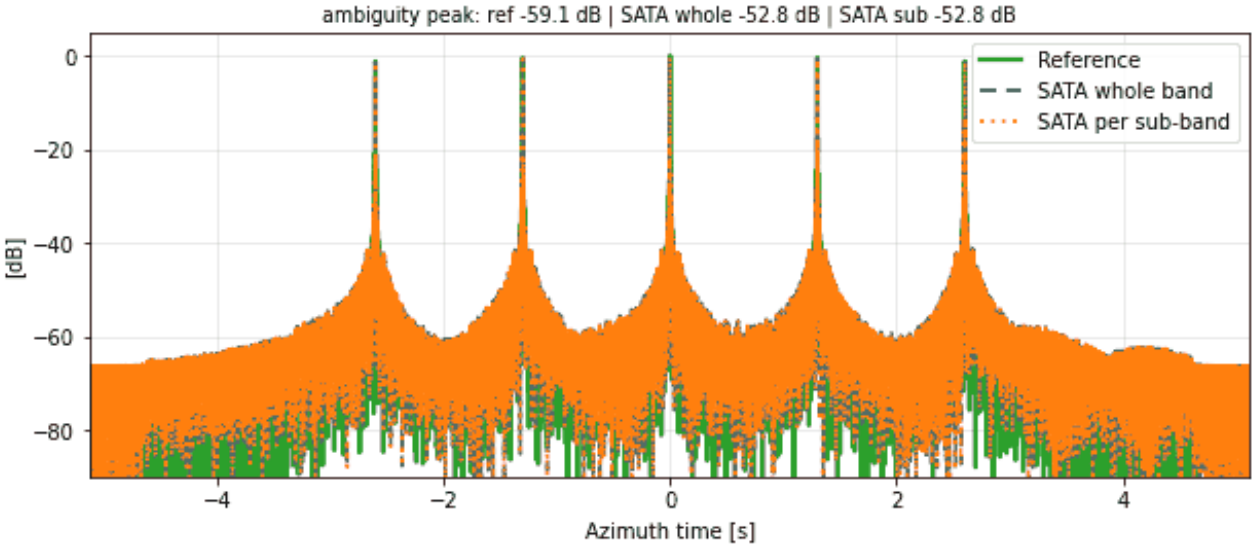

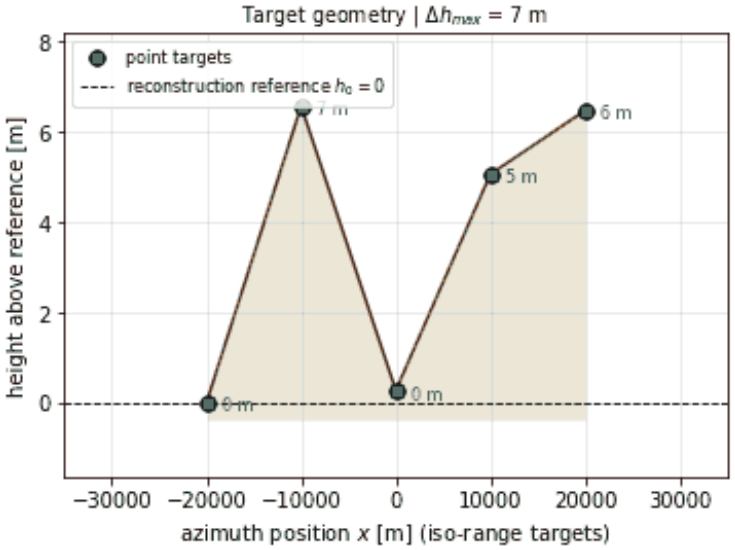


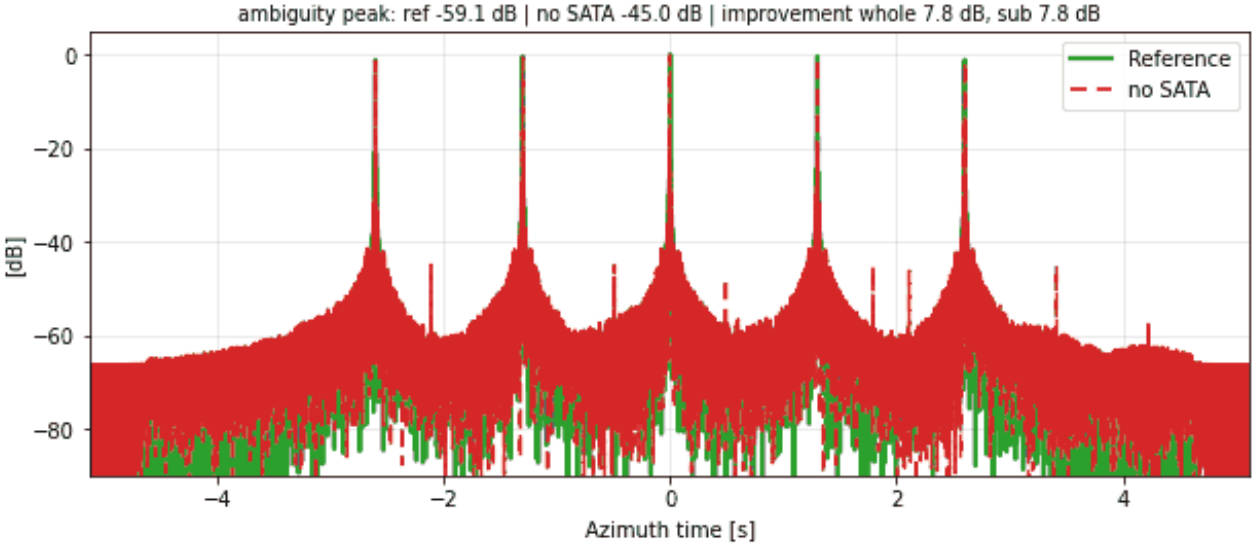


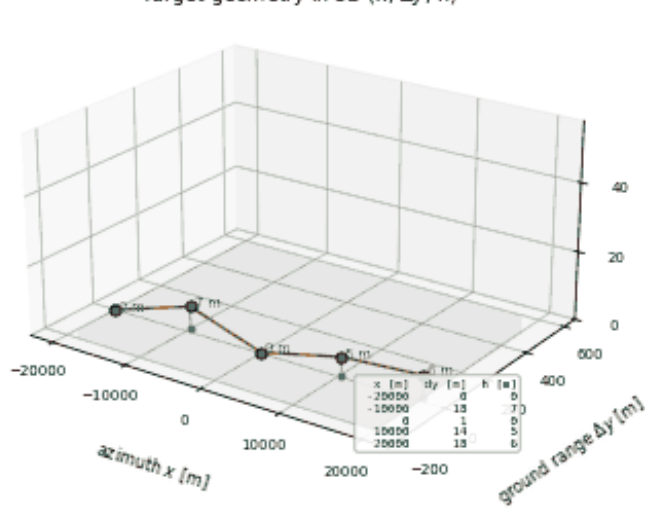



RH-LS-002 | SATA 1D | random heights: N = 5, heights $\sim U(0,10)$ m, seed 1, targets 10 km apart (large distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

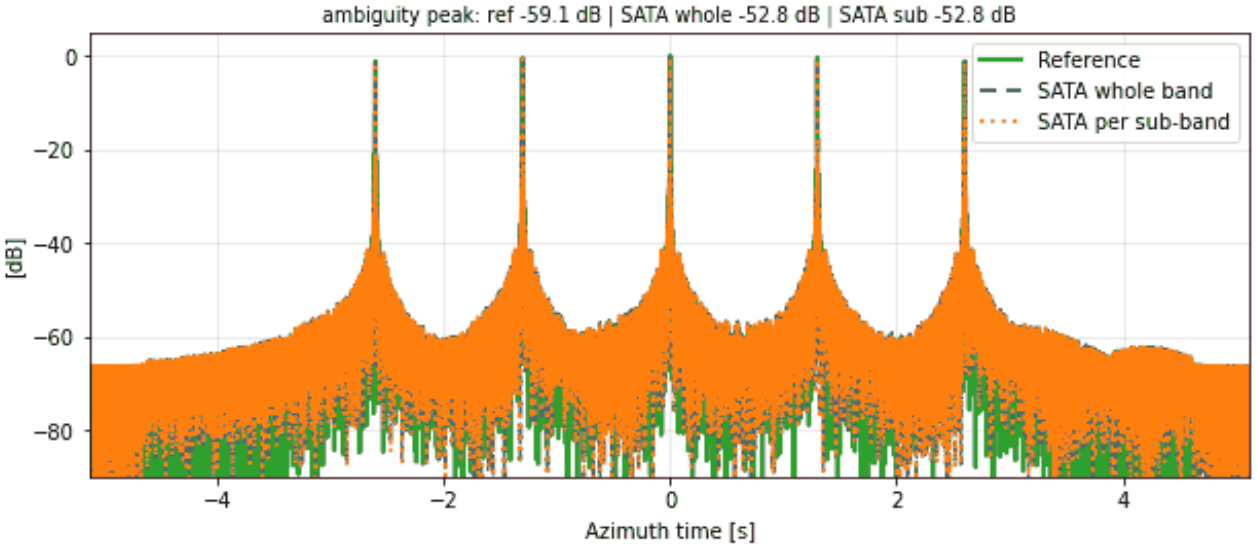

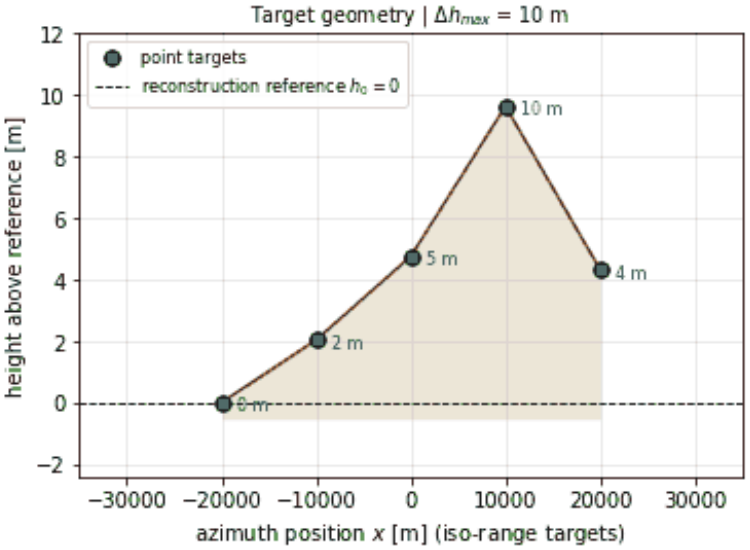


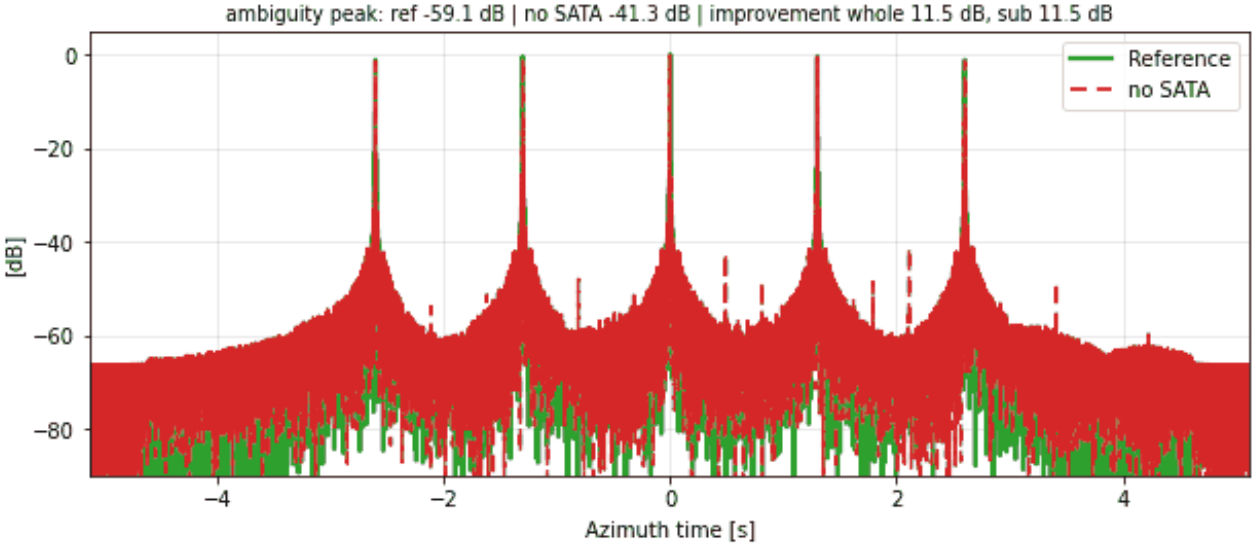


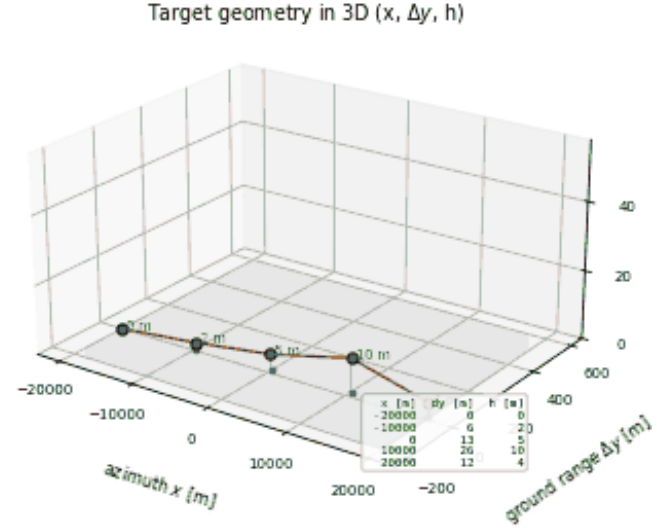



RH-LS-003 | SATA 1D | random heights: N = 5, heights $\sim U(0,50)$ m, seed 0, targets 10 km apart (large distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

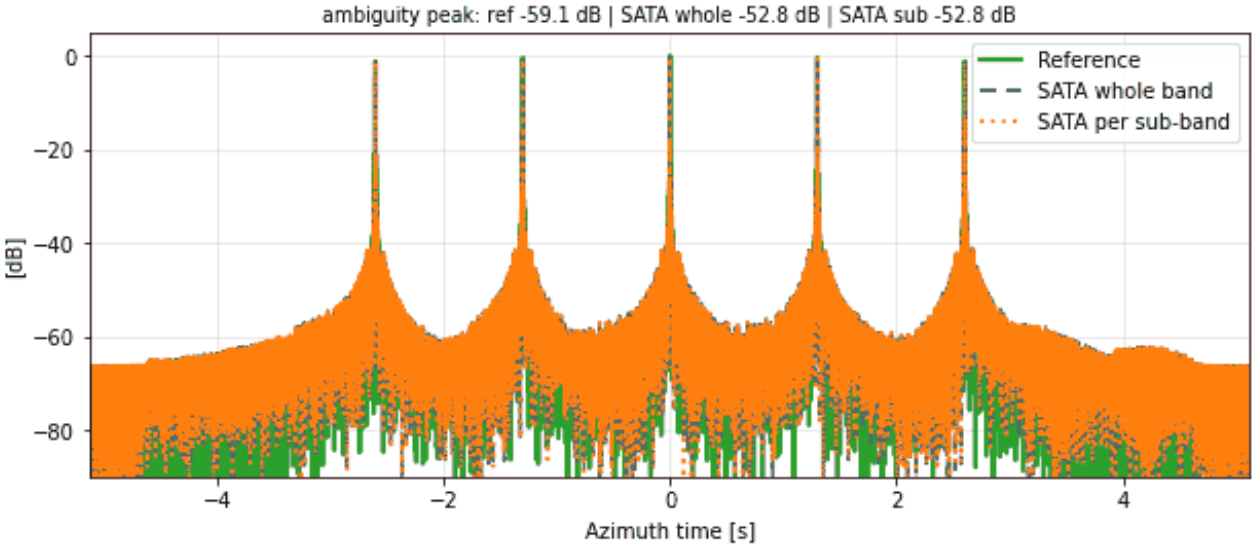

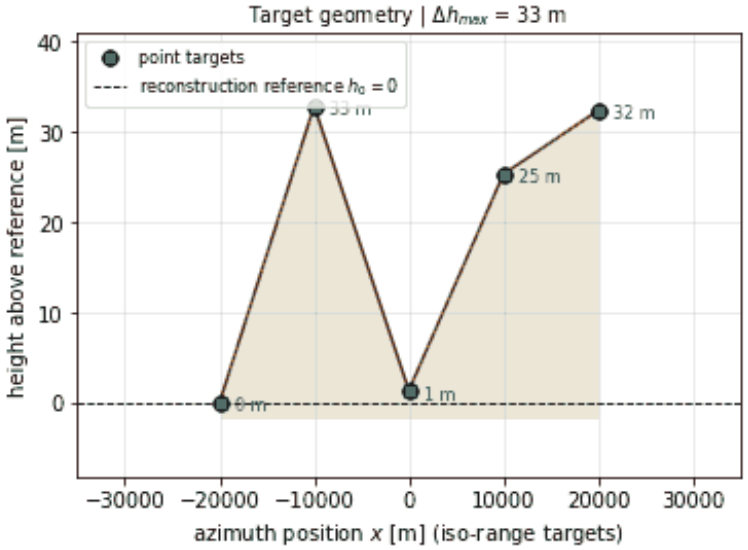


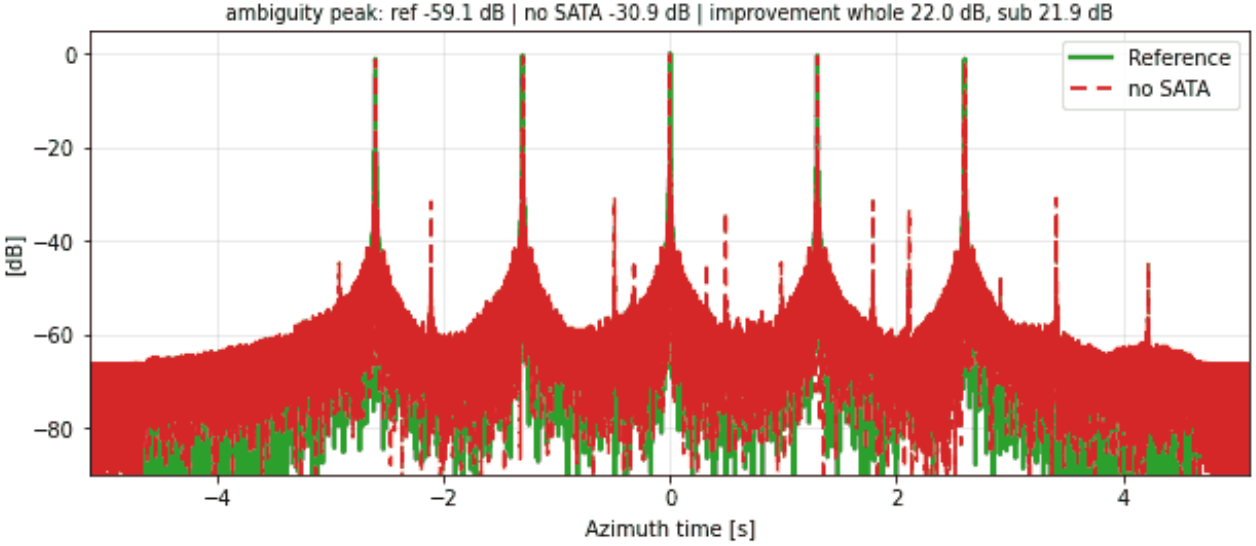


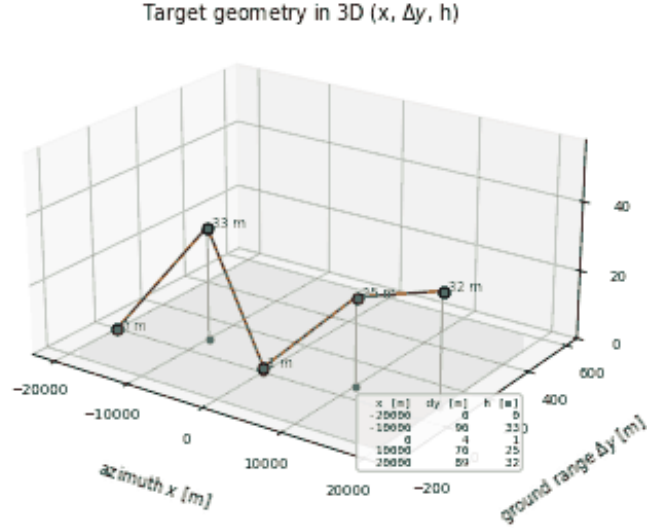



RH-LS-004 | SATA 1D | random heights: N = 5, heights $\sim U(0,50)$ m, seed 1, targets 10 km apart (large distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

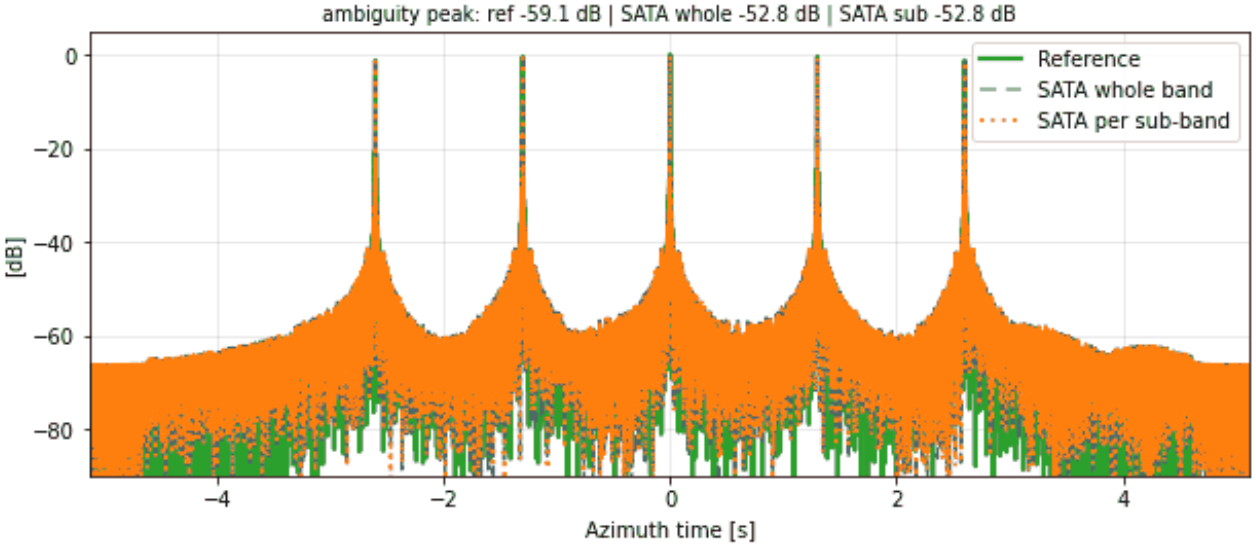

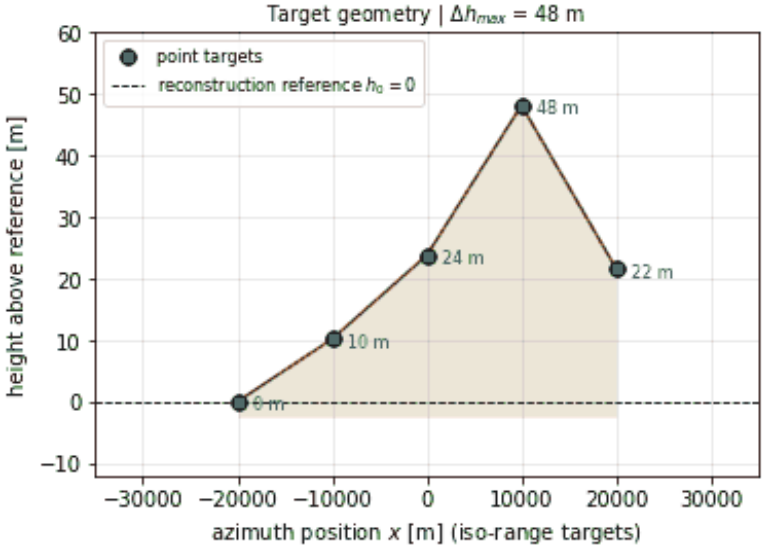


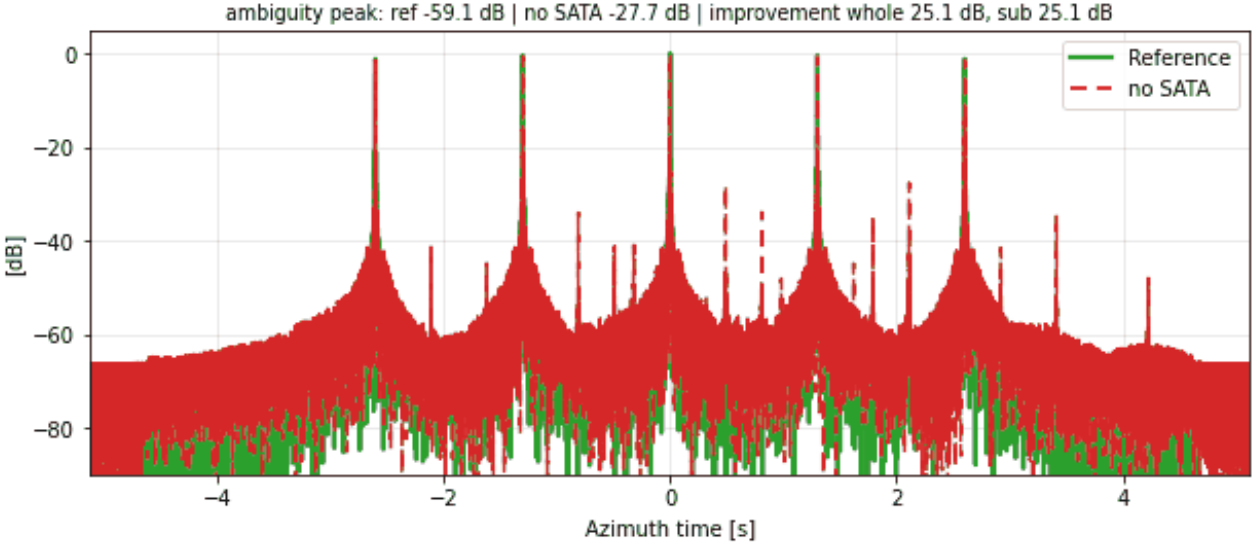


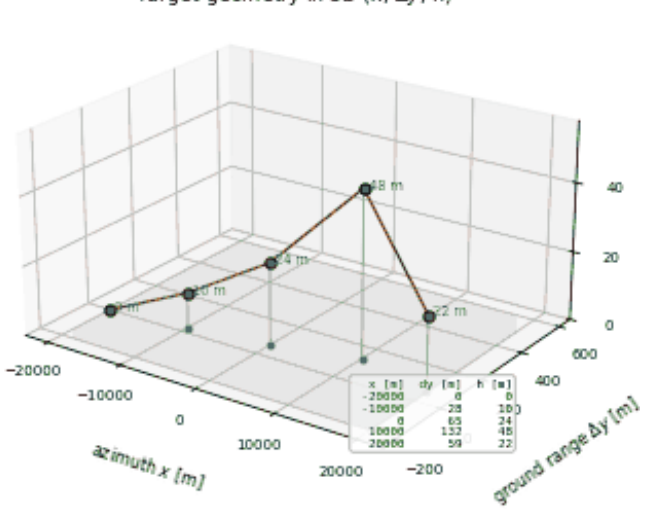


RH-LS-005 | SATA 1D | random heights: N = 5, heights $\sim U(0,100)$ m, seed 0, targets 10 km apart (large distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

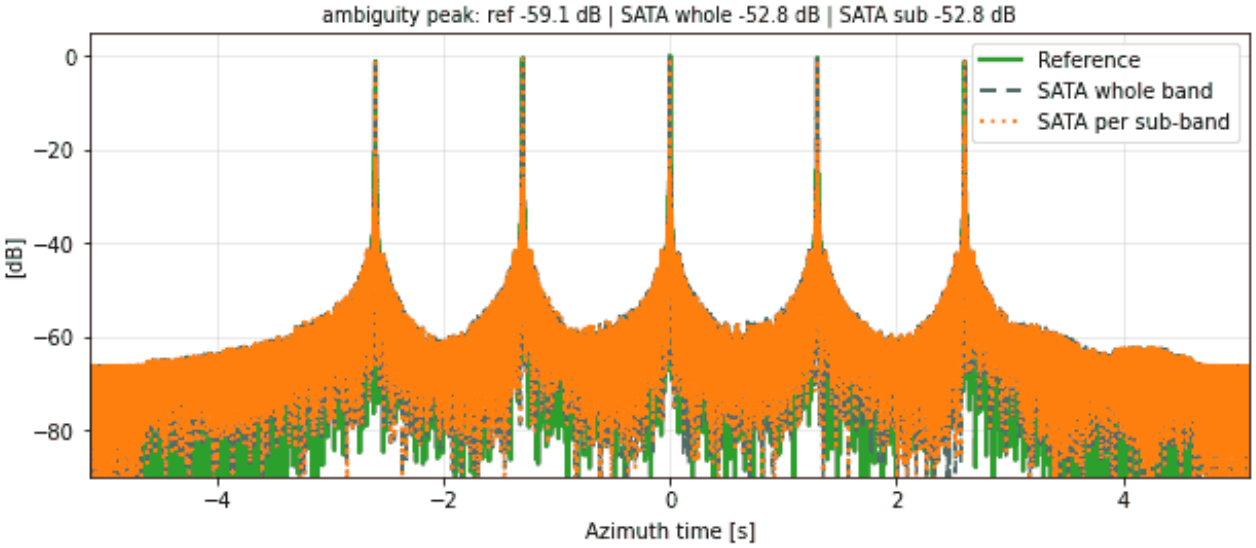


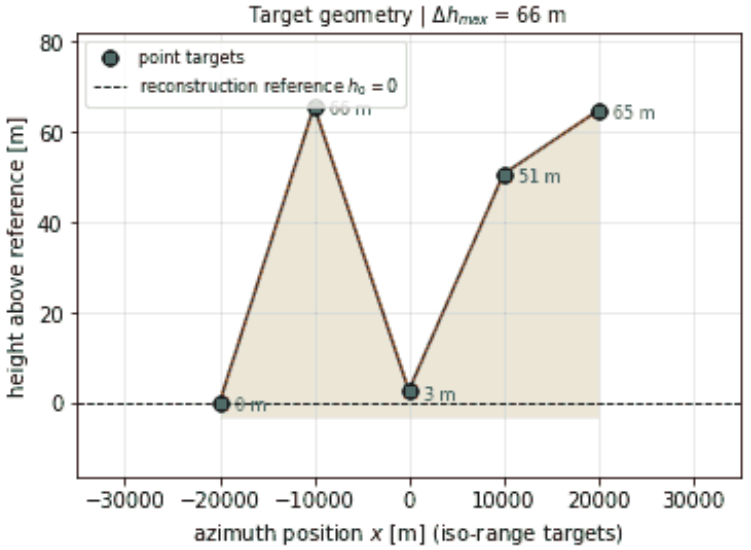





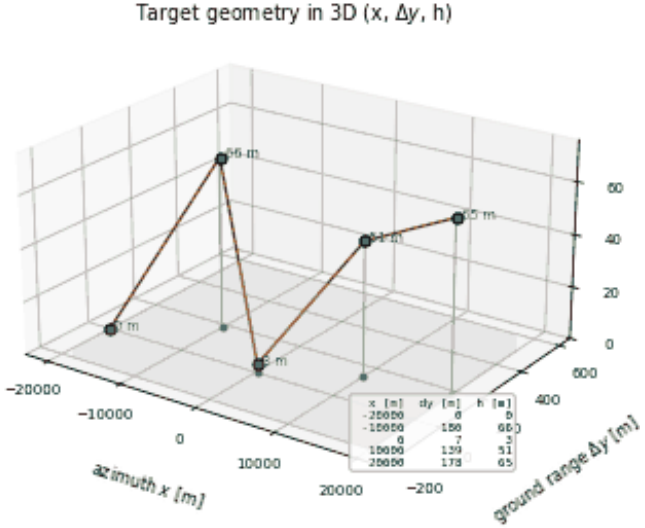


RH-LS-006 | SATA 1D | random heights: N = 5, heights $\sim U(0,100)$ m, seed 1, targets 10 km apart (large distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

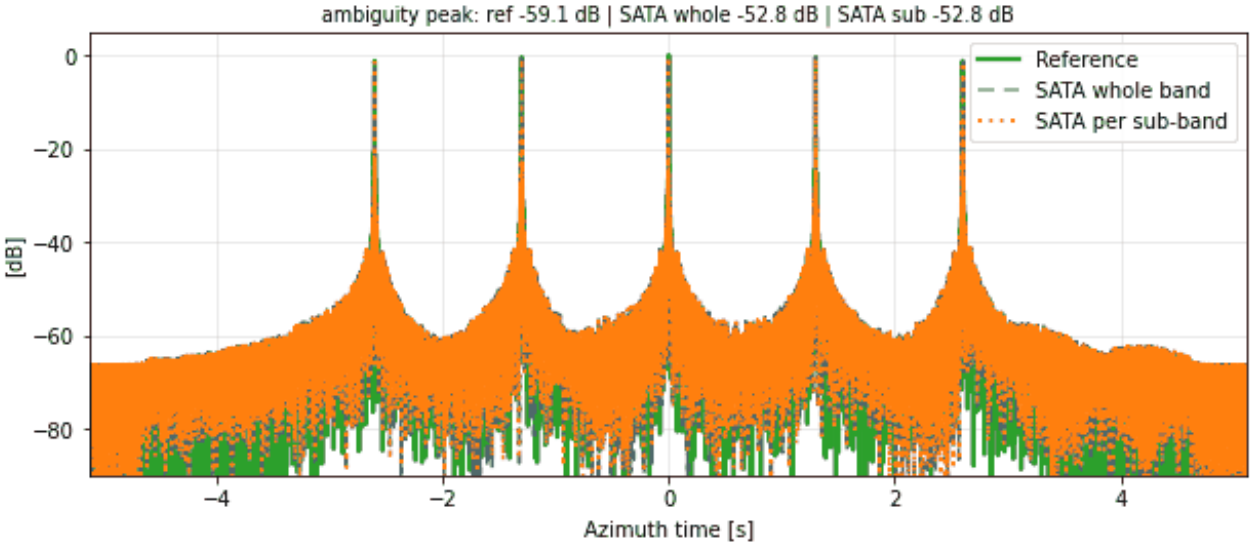

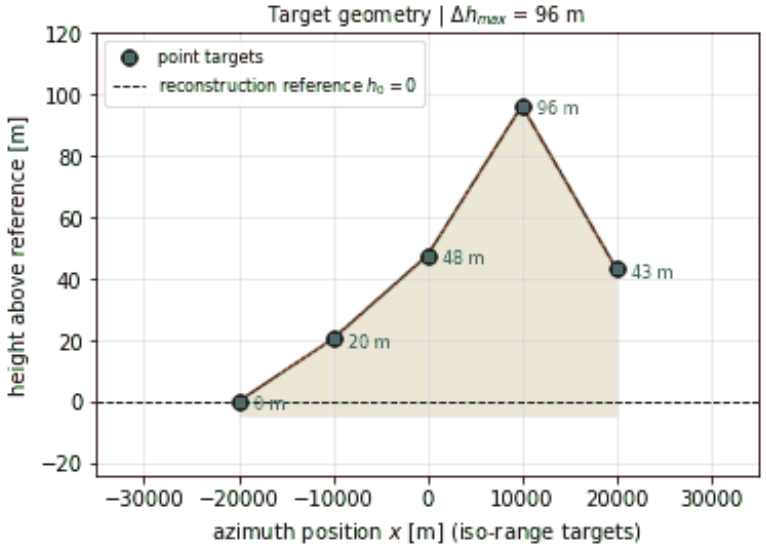


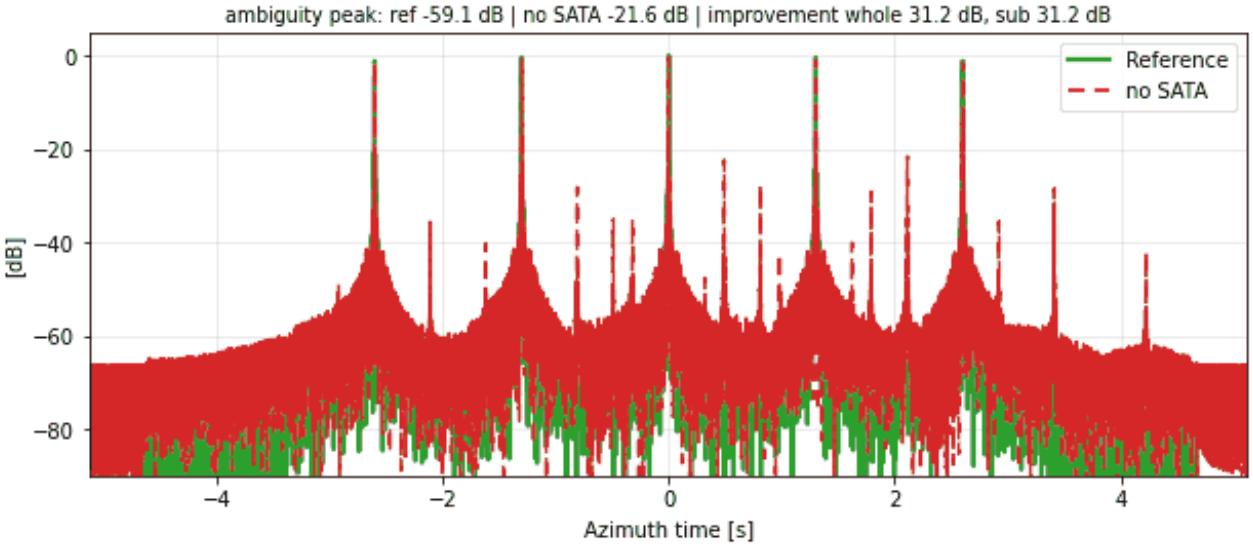


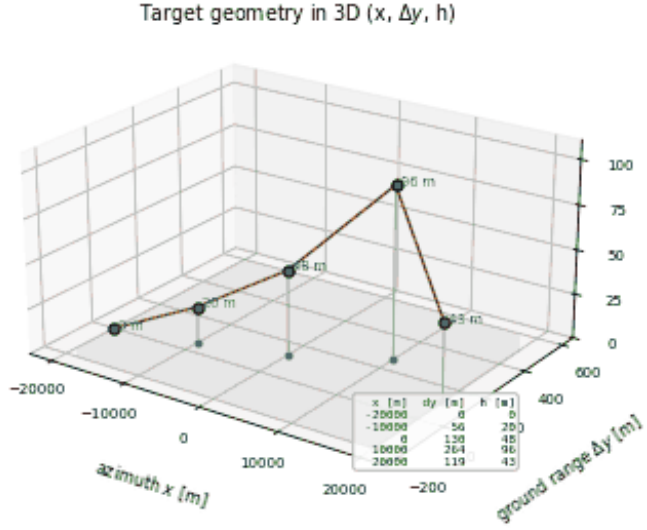



RH-LN-001 | SATA 1D | random heights: N = 5, heights $\sim U(0, 100)$ m, seed 0, targets 10 km apart (large distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

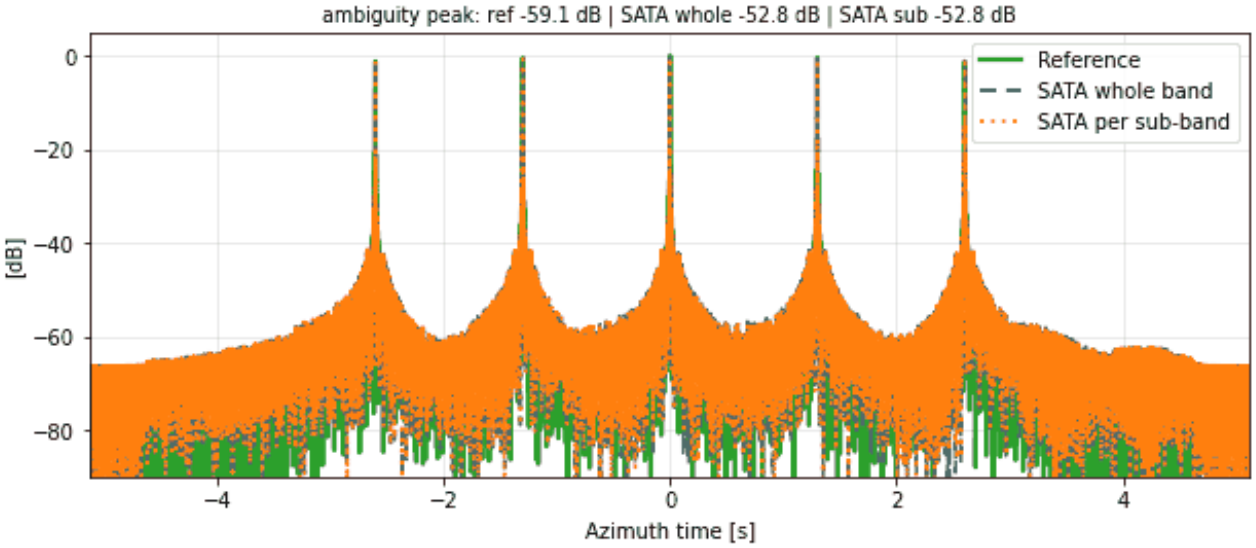

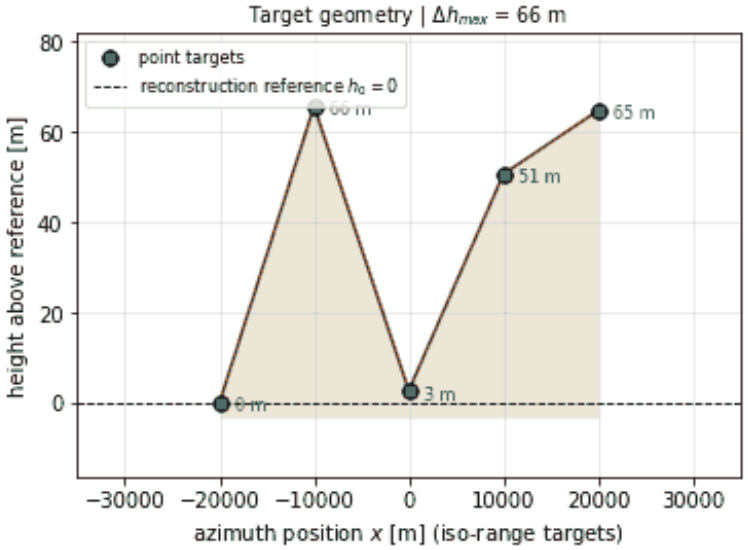


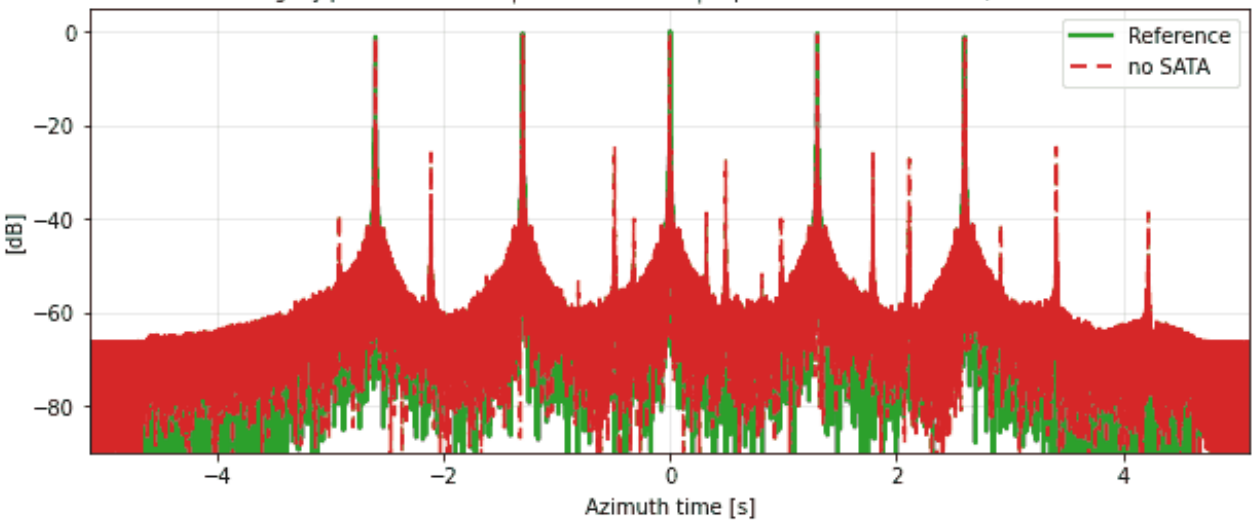


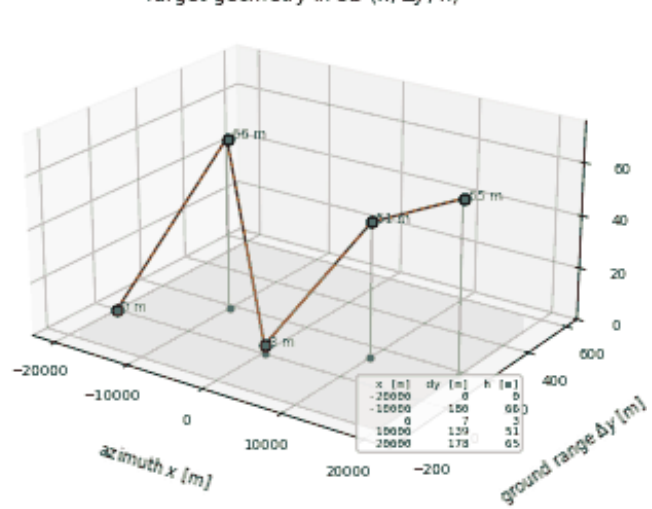



RH-LN-002 | SATA 1D | random heights: N = 5, heights $\sim U(0, 100)$ m, seed 1, targets 10 km apart (large distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

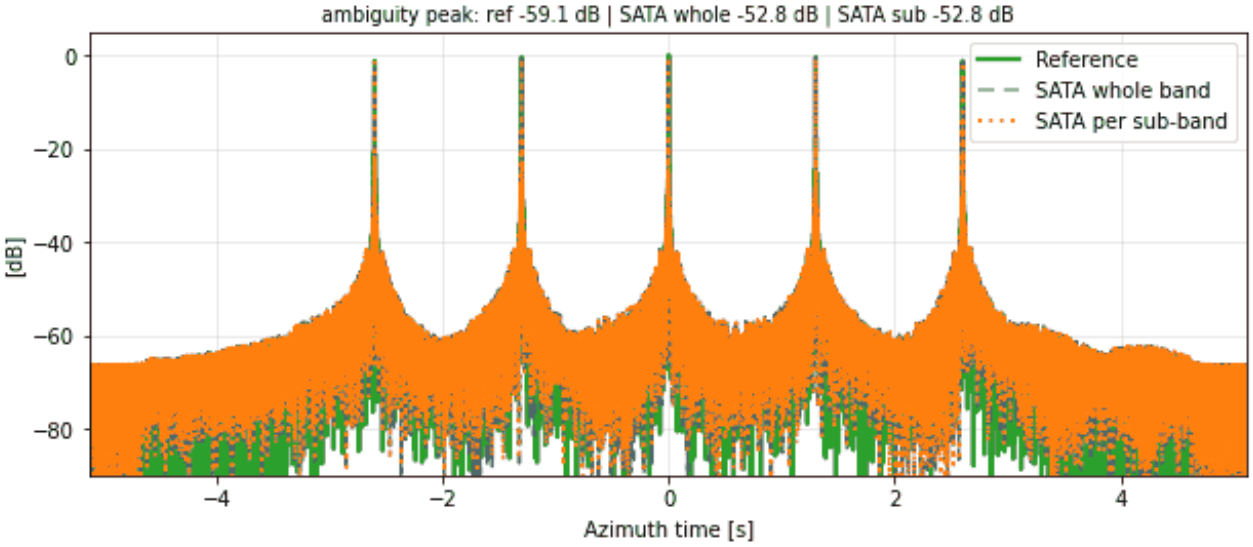

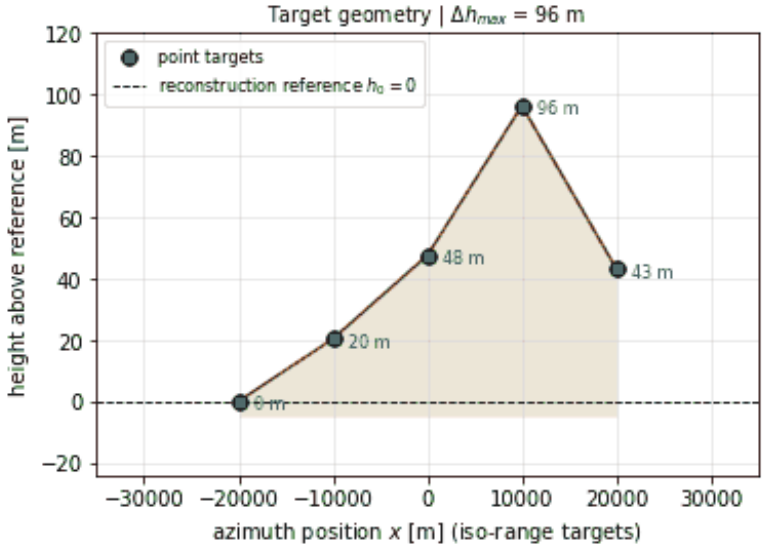


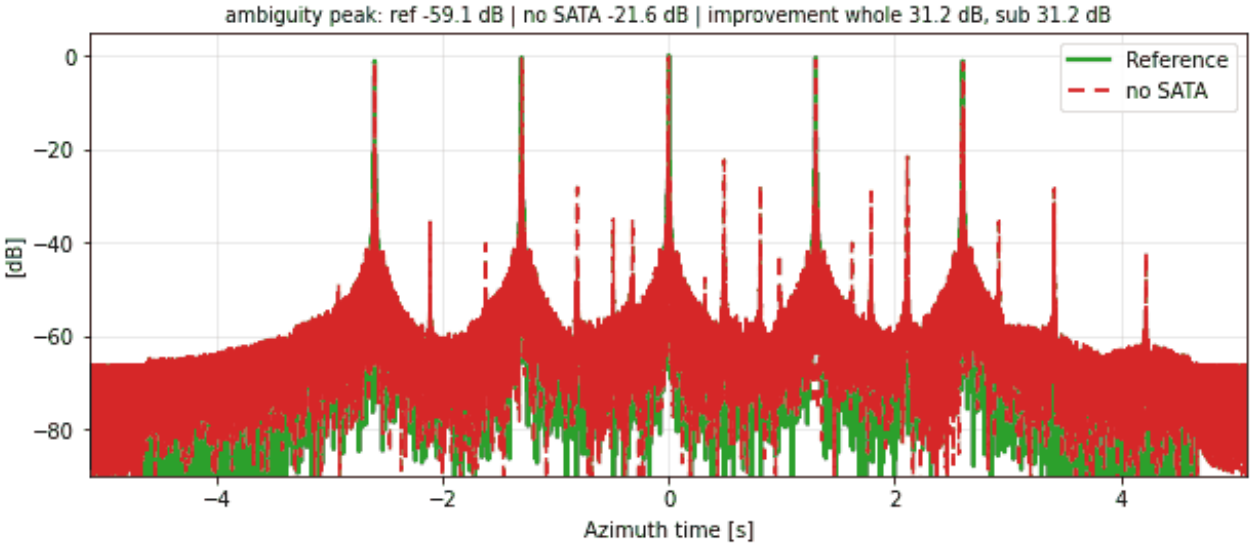


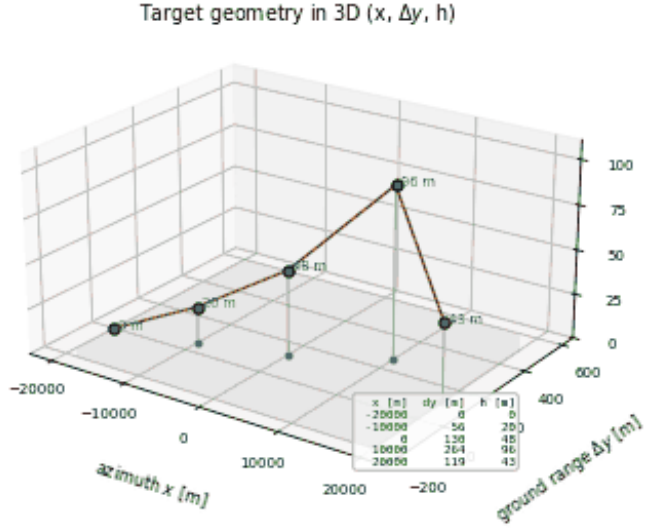



RH-LN-003 | SATA 1D | random heights: N = 5, heights $\sim U(0, 500)$ m, seed 0, targets 10 km apart (large distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

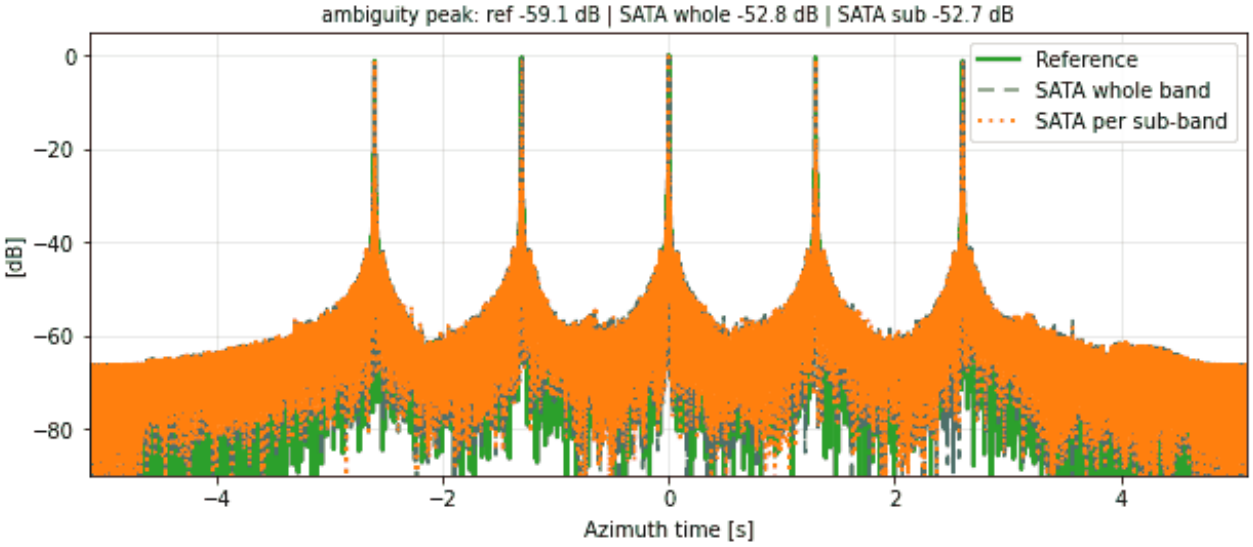

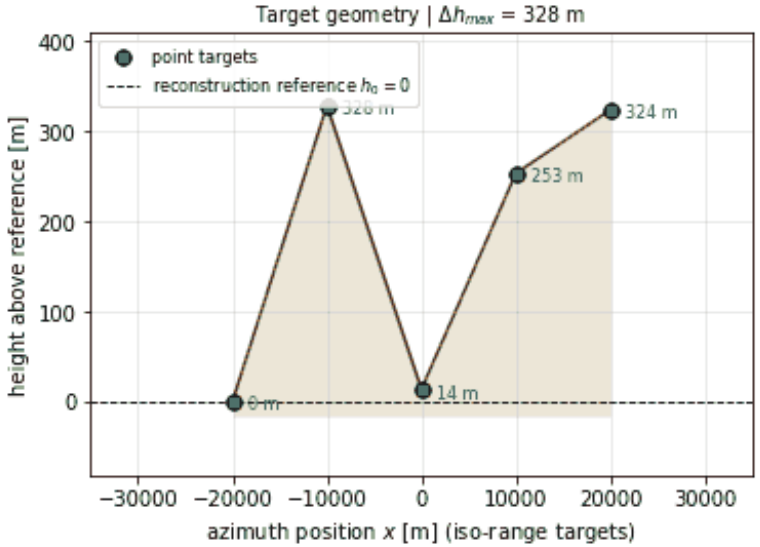


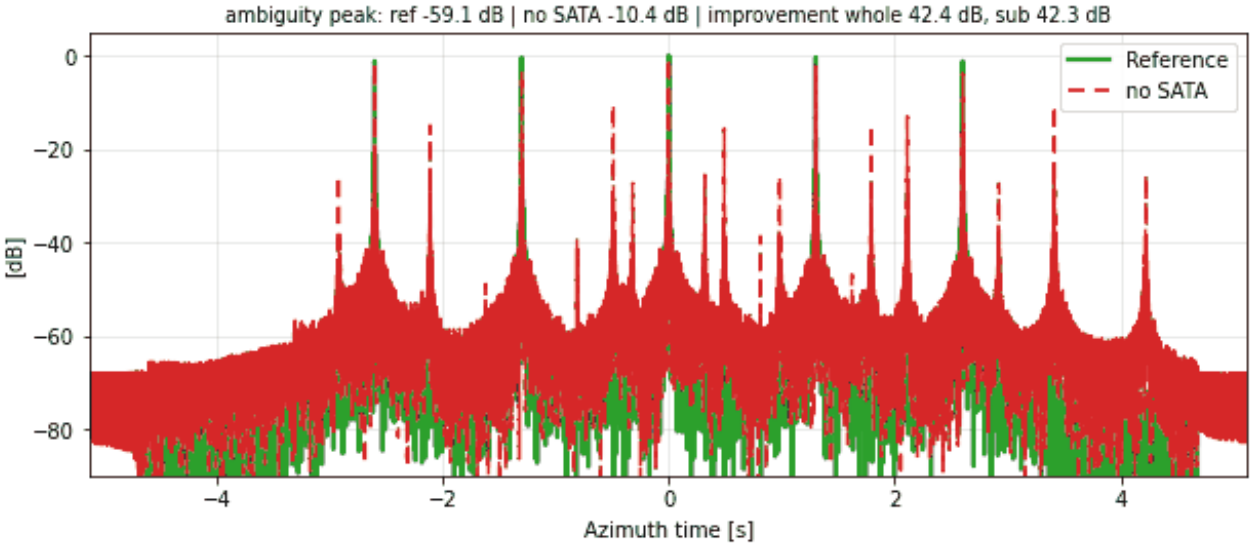


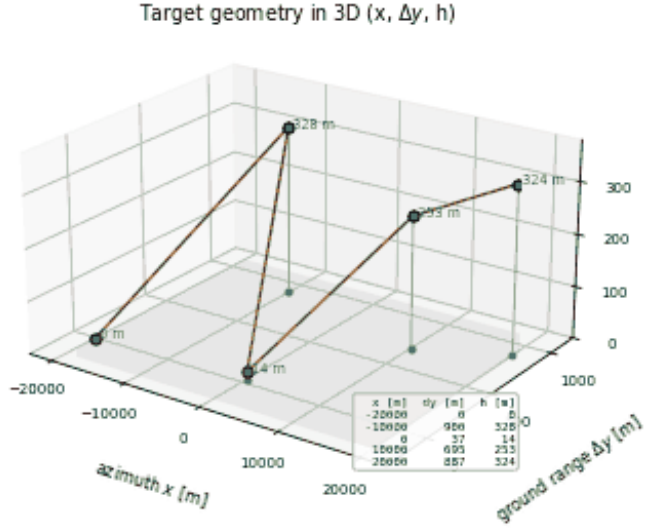



RH-LN-004 | SATA 1D | random heights: N = 5, heights $\sim U(0, 500)$ m, seed 1, targets 10 km apart (large distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

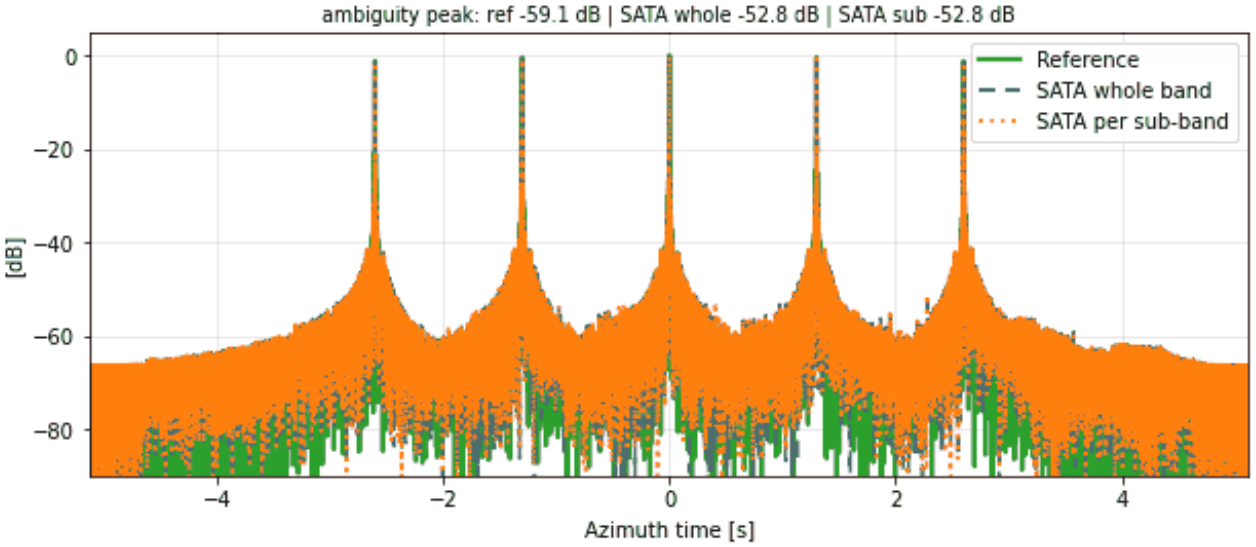

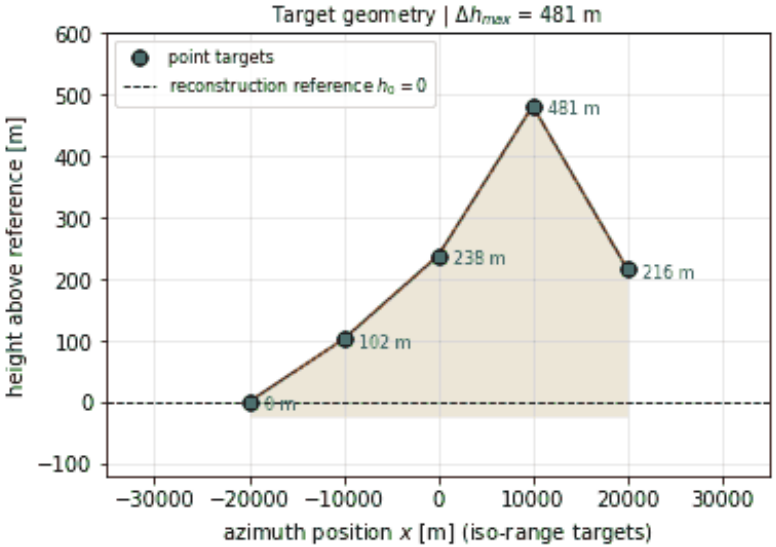


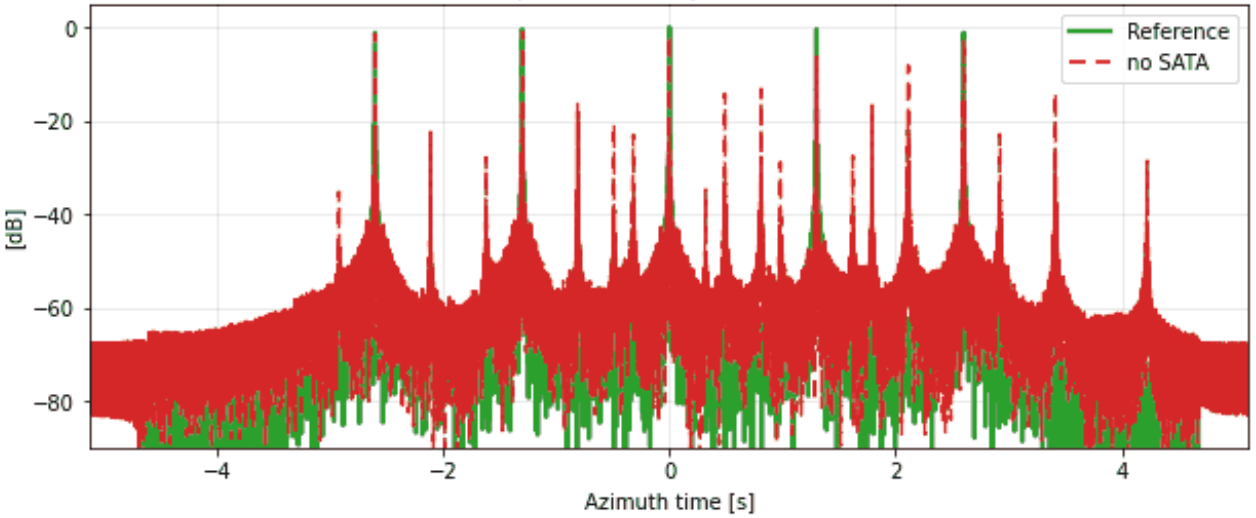


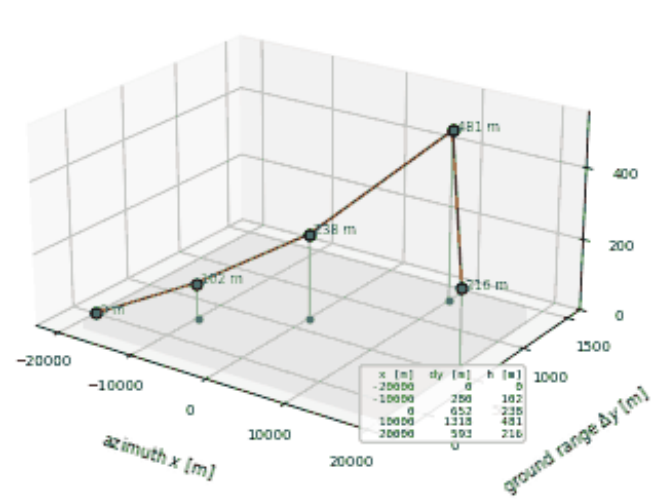



RH-LN-005 | SATA 1D | random heights: N = 5, heights ~ $U(0, 1000)$ m, seed 0, targets 10 km apart (large distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

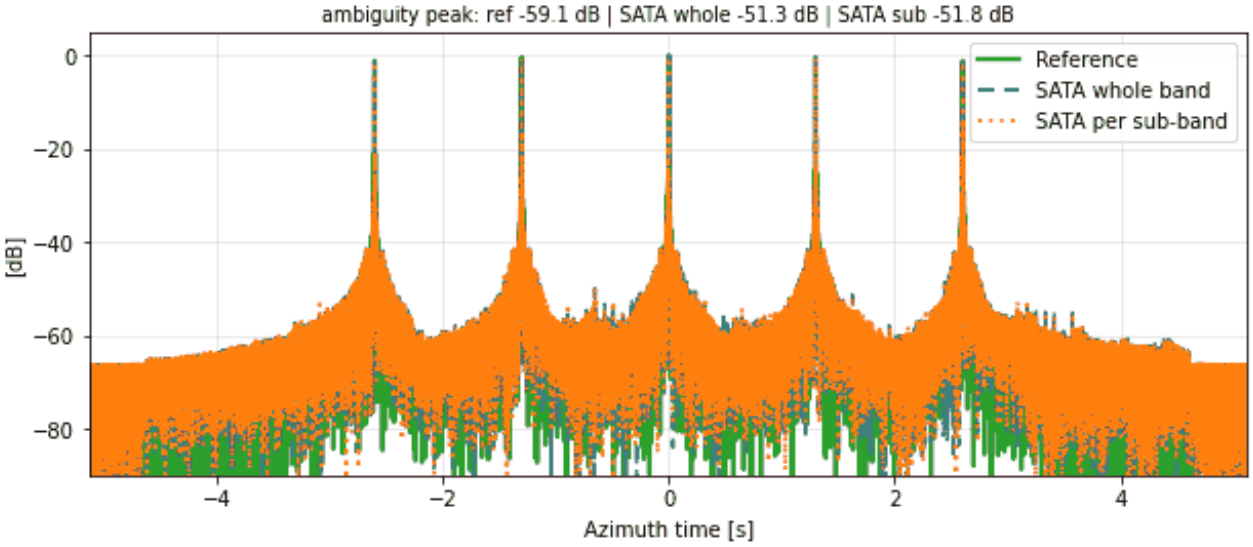

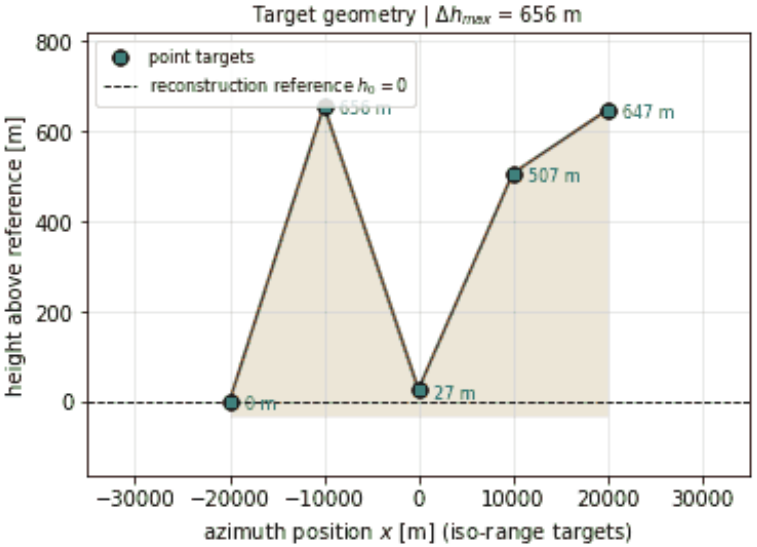


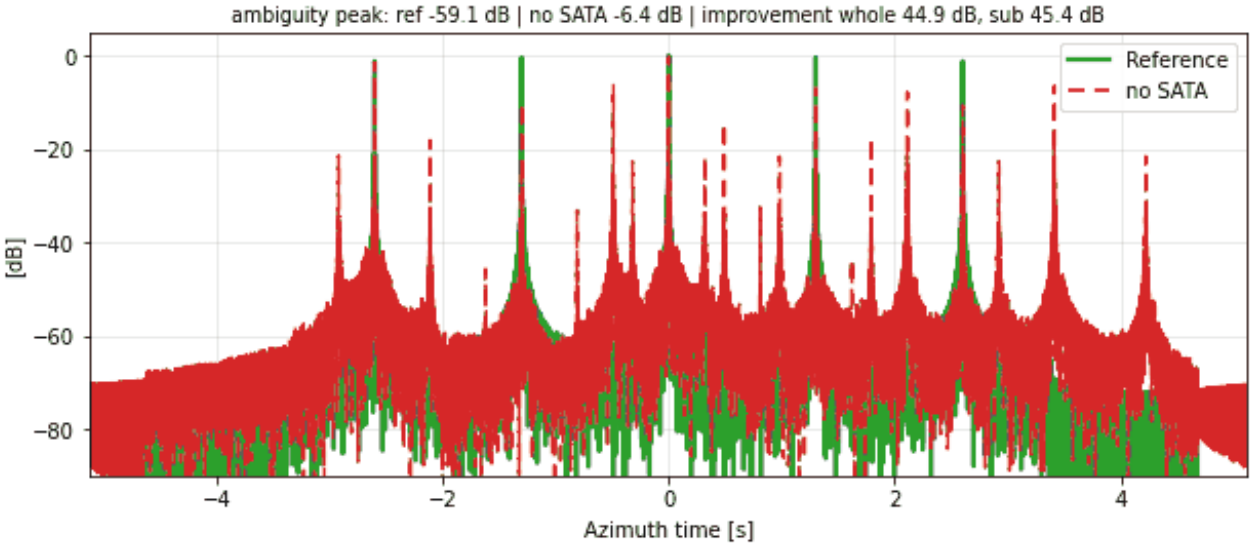


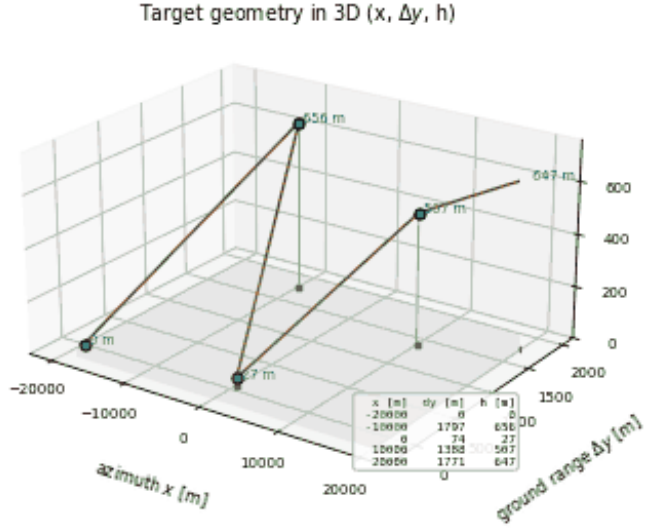



RH-LN-006 | SATA 1D | random heights: N = 5, heights $\sim U(0, 1000)$ m, seed 1, targets 10 km apart (large distance), normal heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

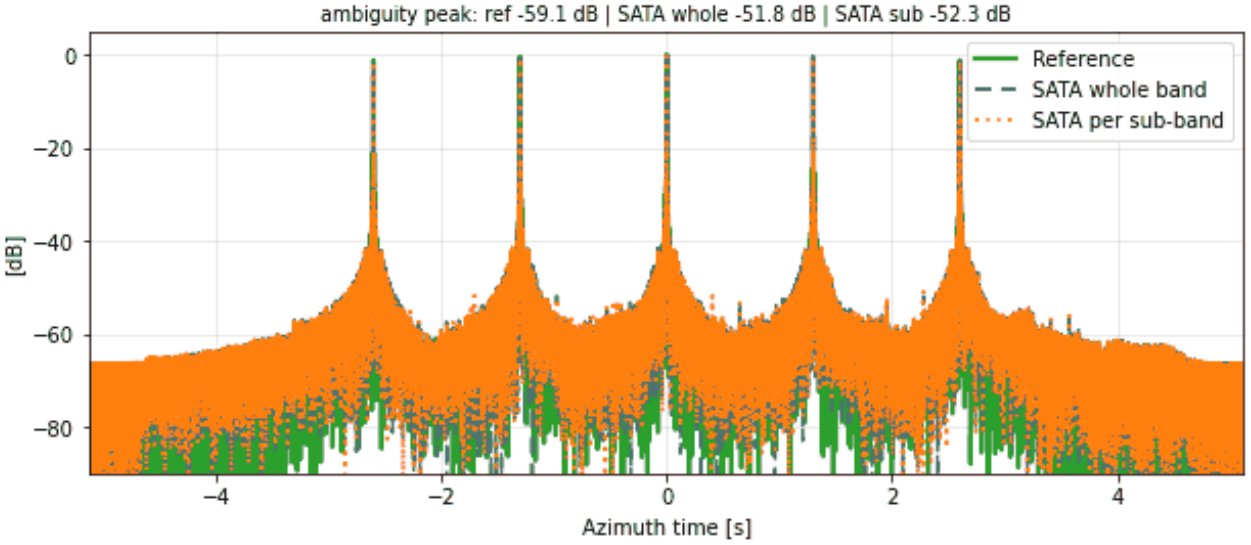

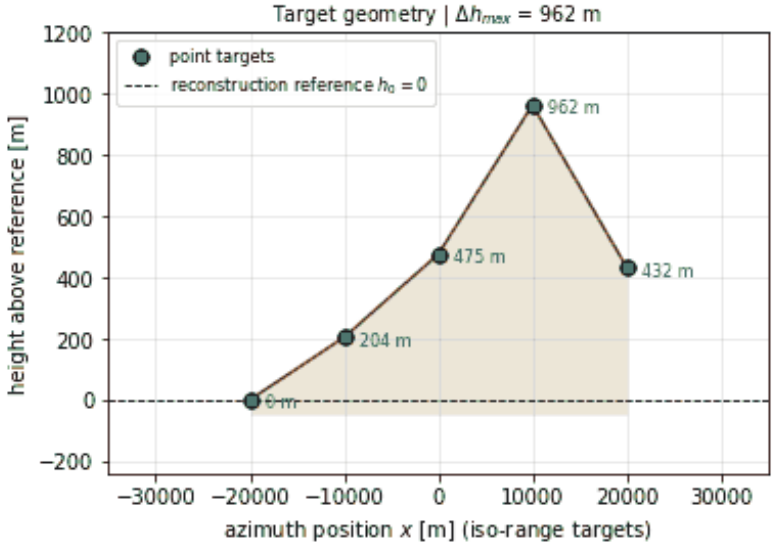


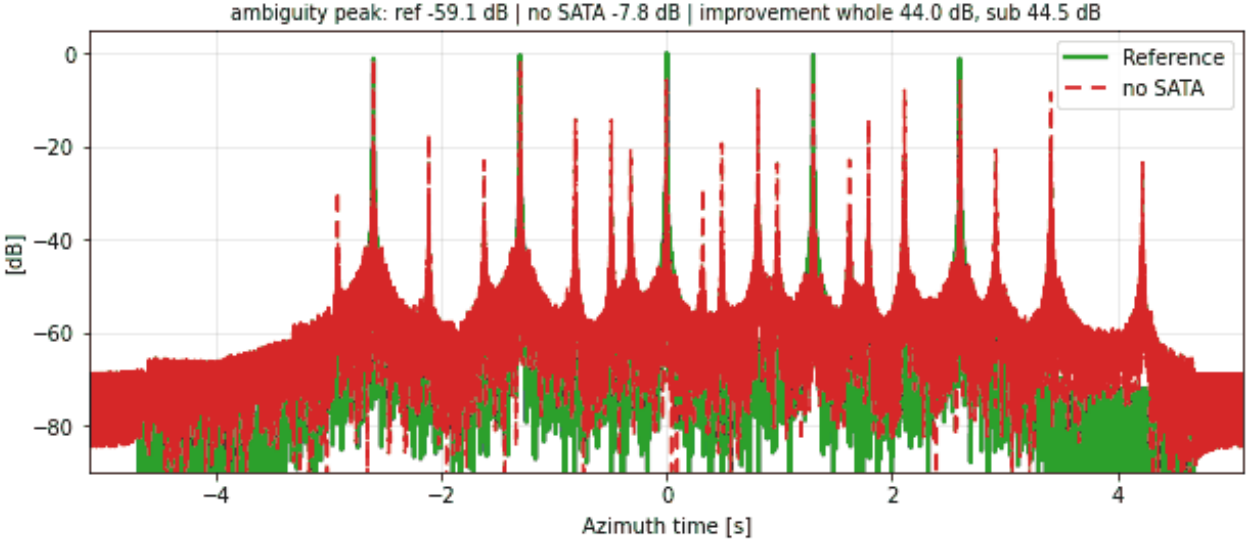


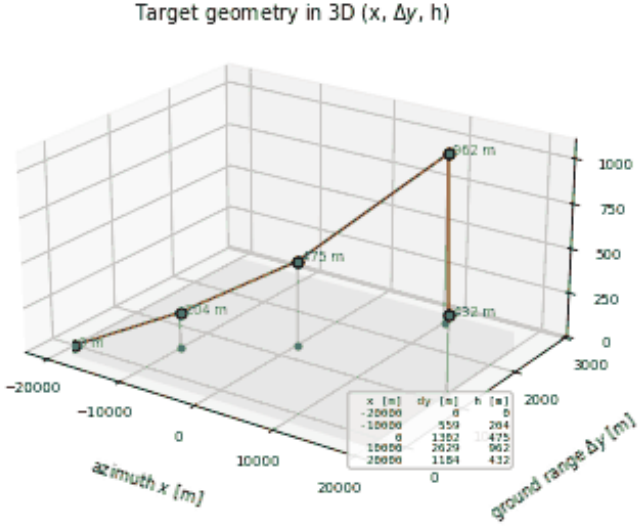



RH-LL-001 | SATA 1D | random heights: N = 5, heights $\sim U(0, 1300)$ m, seed 0, targets 10 km apart (large distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

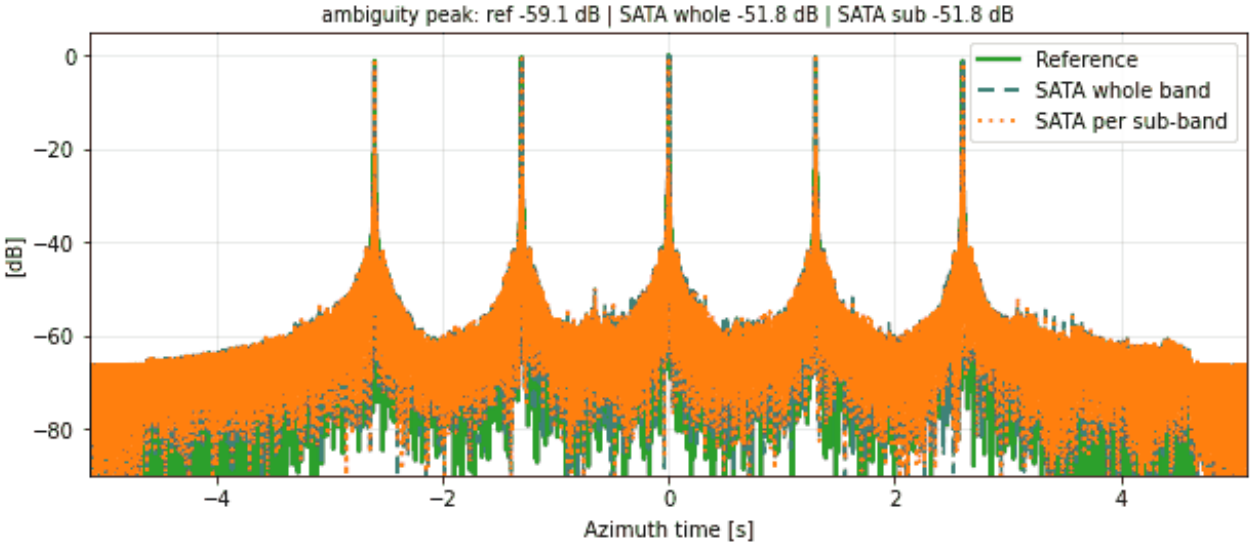

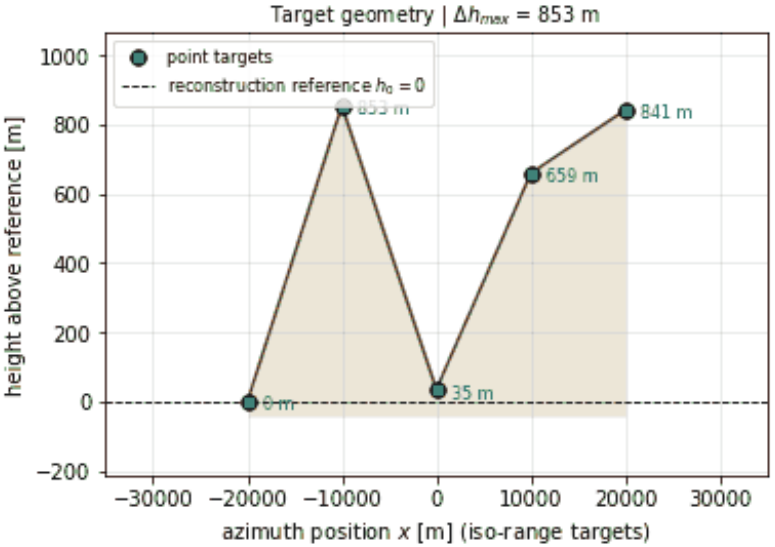


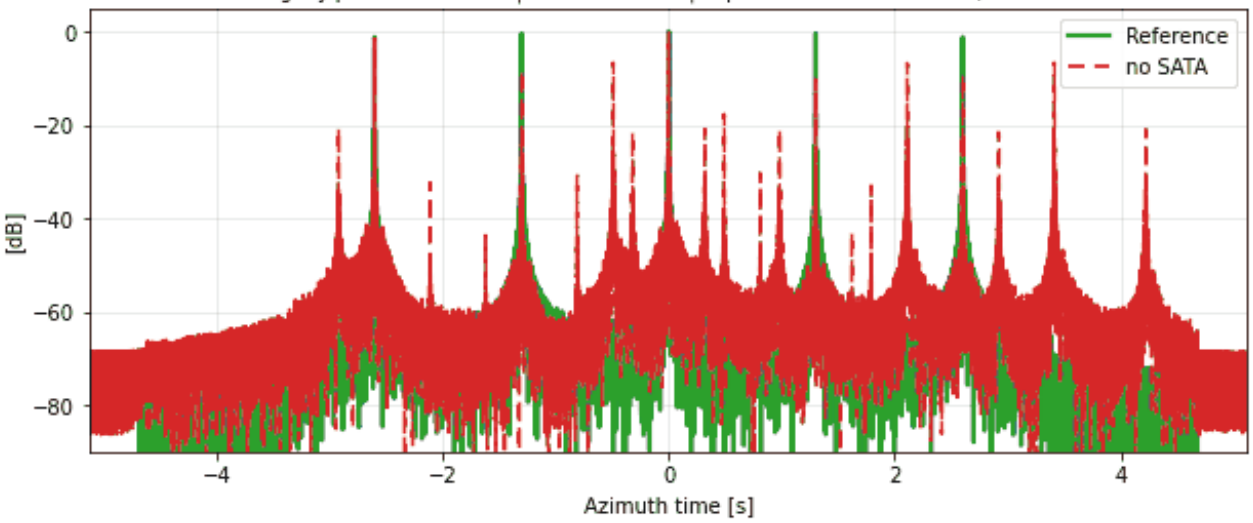


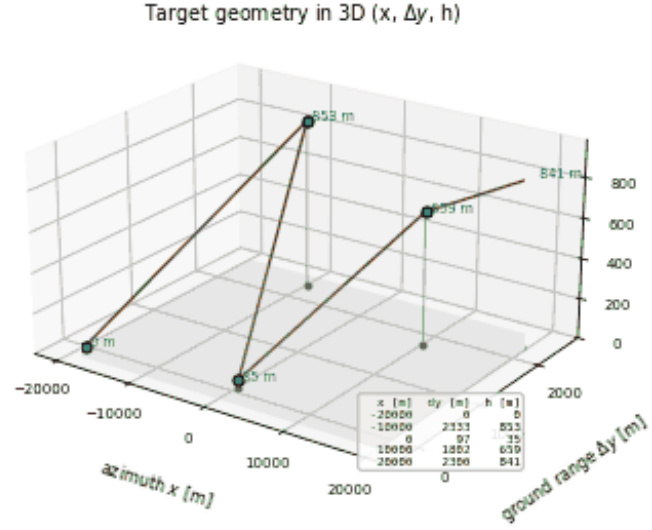



RH-LL-002 | SATA 1D | random heights: N = 5, heights $\sim U(0, 1300)$ m, seed 1, targets 10 km apart (large distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

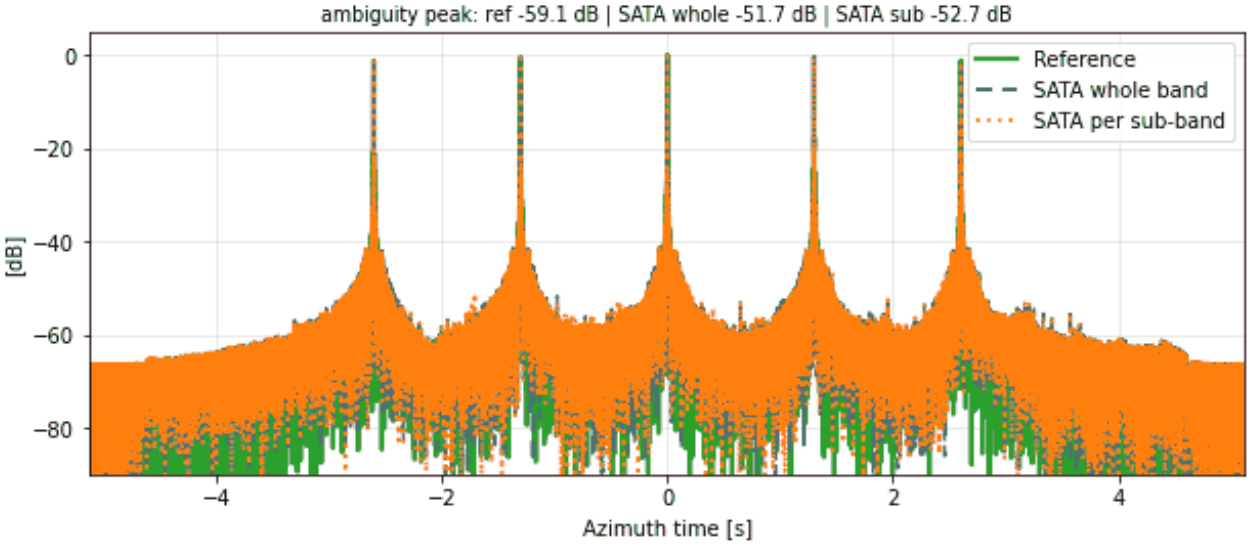

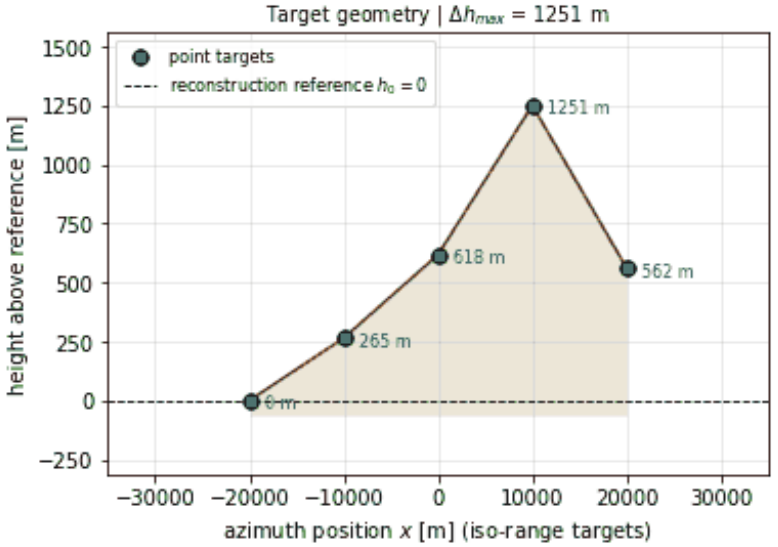


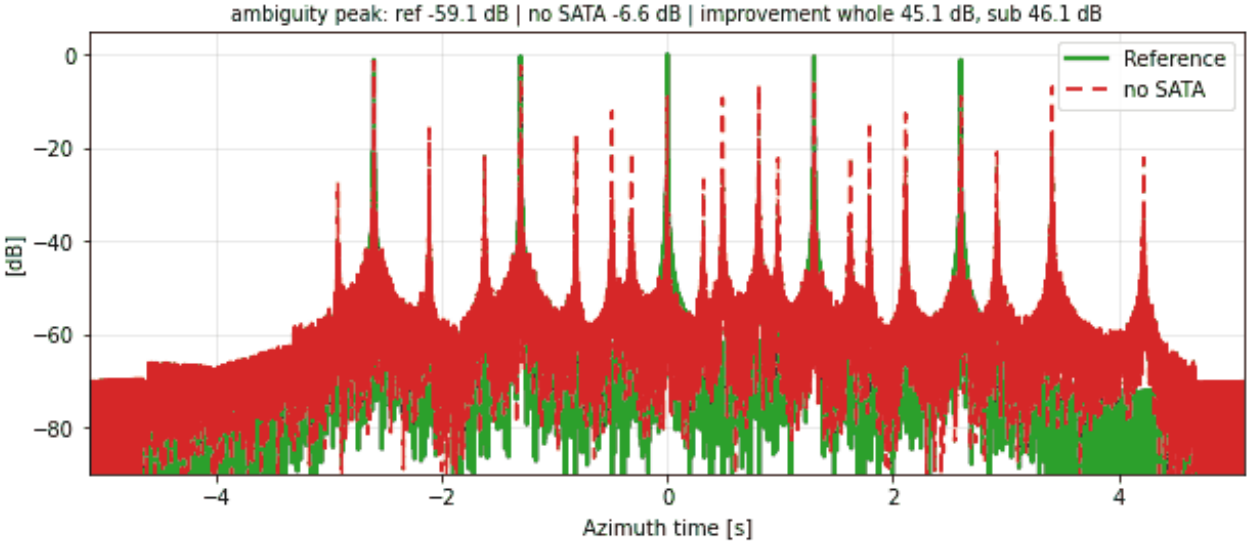


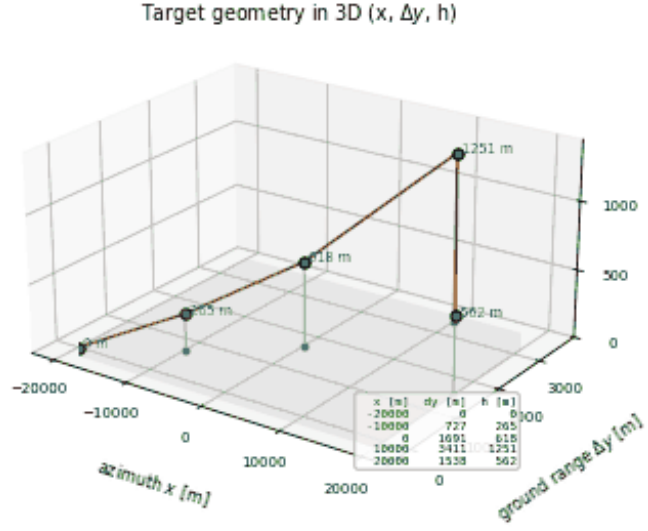



RH-LL-003 | SATA 1D | random heights: N = 5, heights $\sim U(0, 6500)$ m, seed 0, targets 10 km apart (large distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

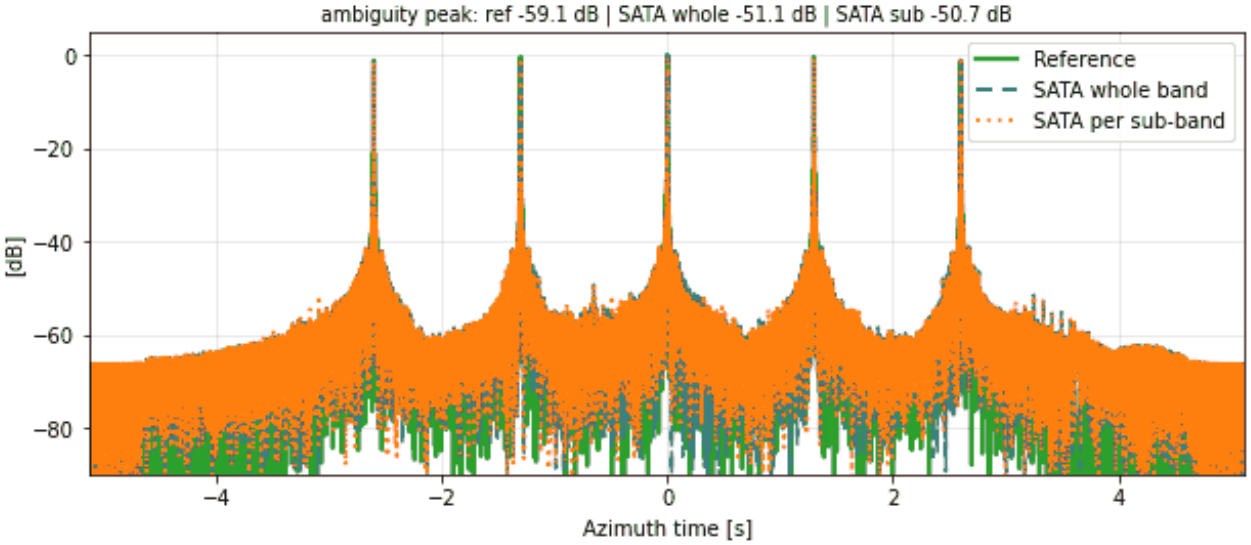

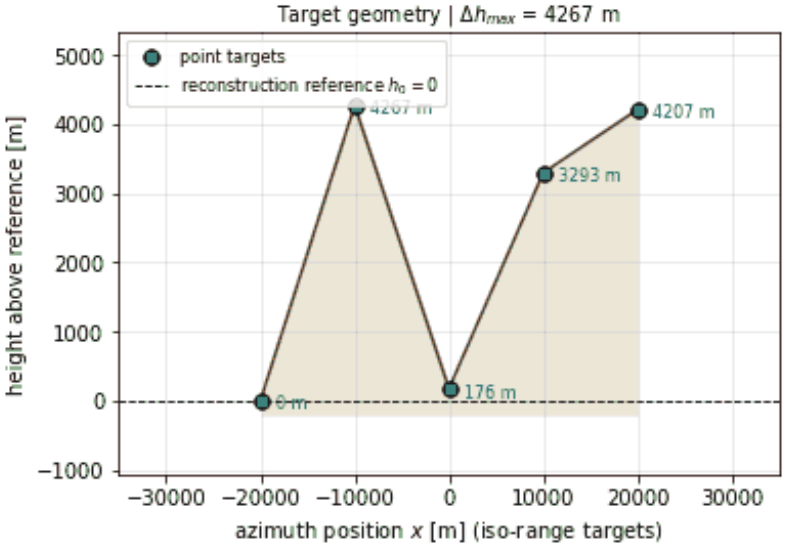


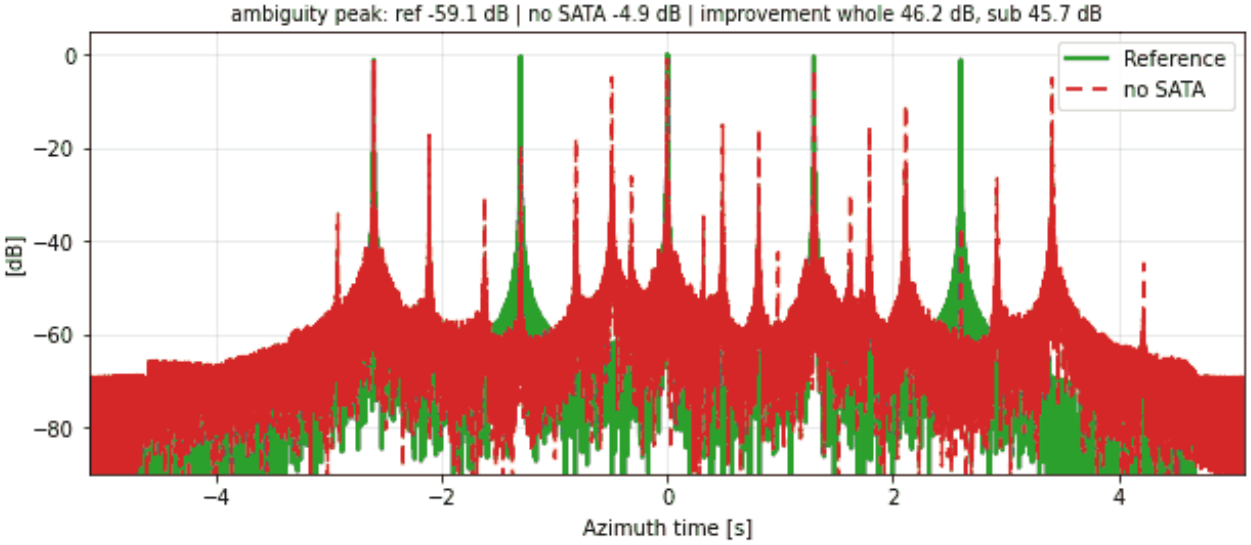


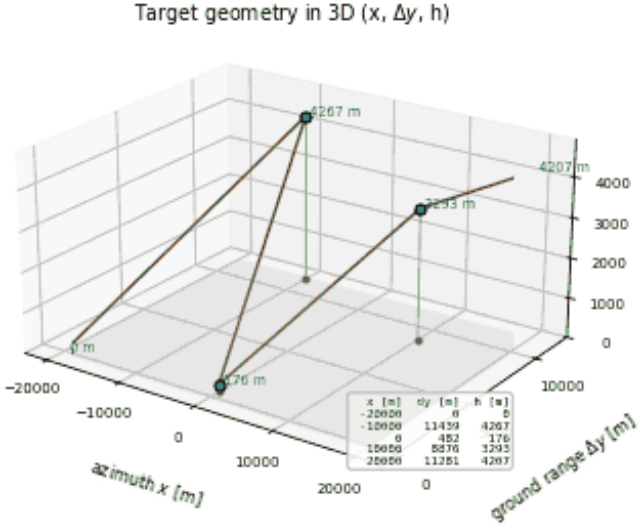



RH-LL-004 | SATA 1D | random heights: N = 5, heights $\sim U(0, 6500)$ m, seed 1, targets 10 km apart (large distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

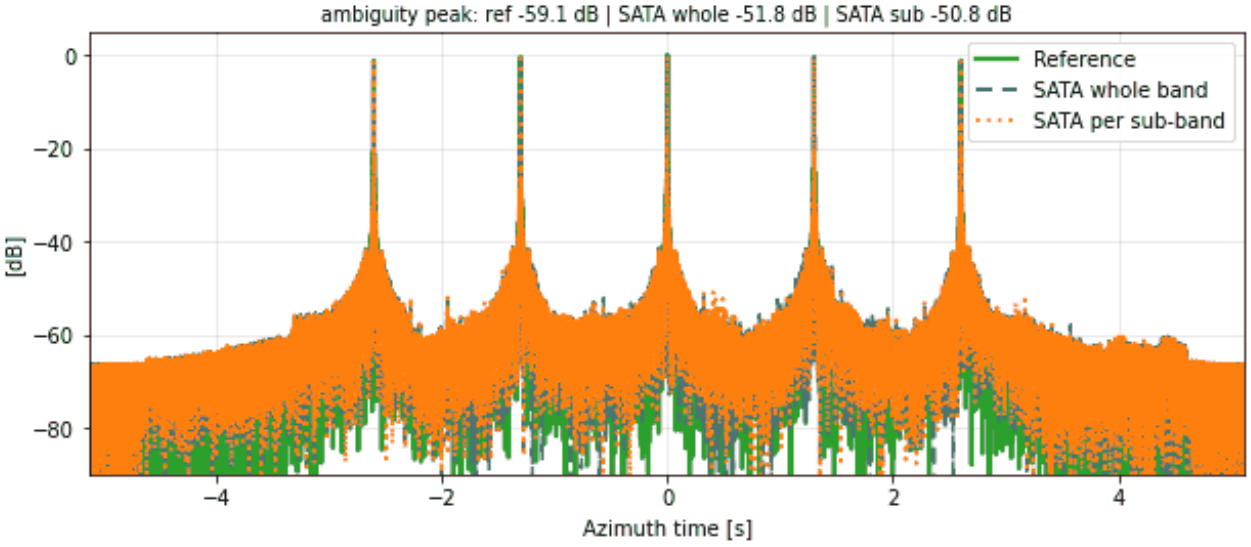

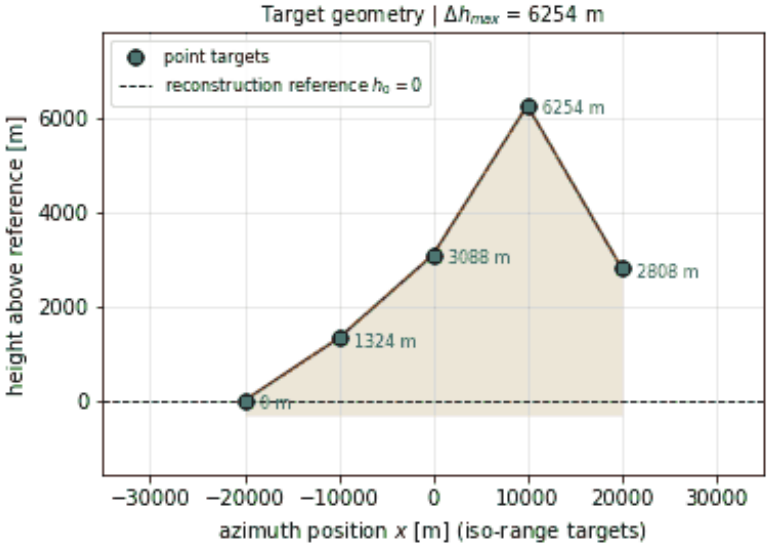


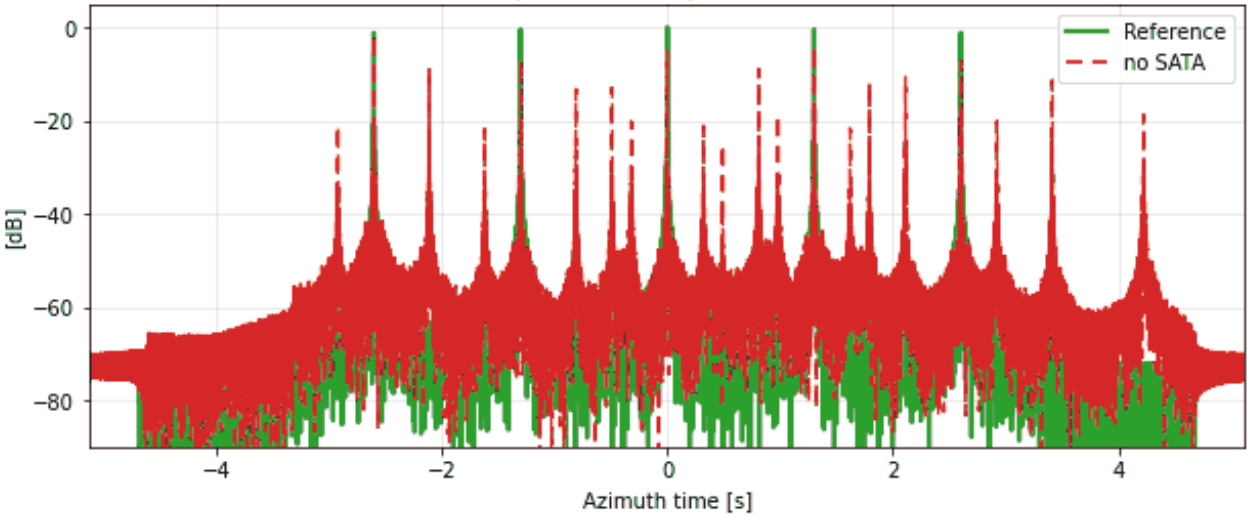


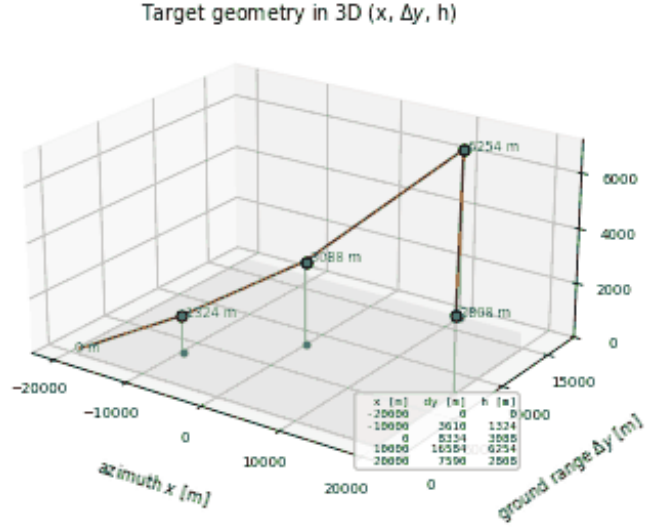



RH-LL-005 | SATA 1D | random heights: N = 5, heights $\sim U(0, 13000)$ m, seed 0, targets 10 km apart (large distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

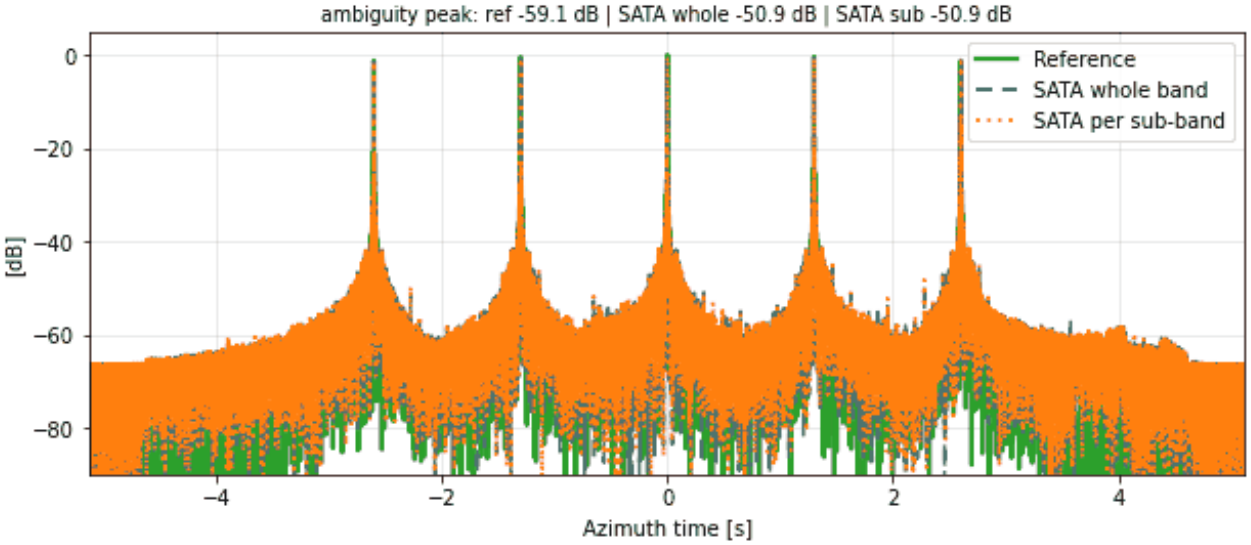

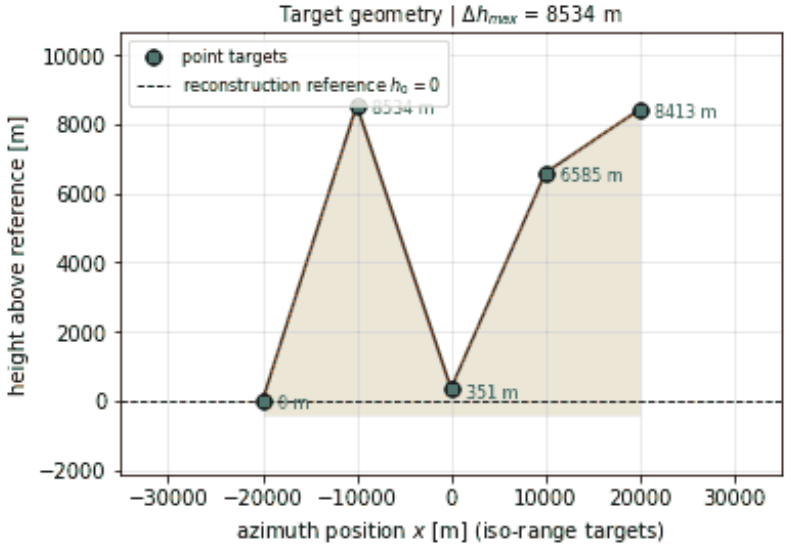


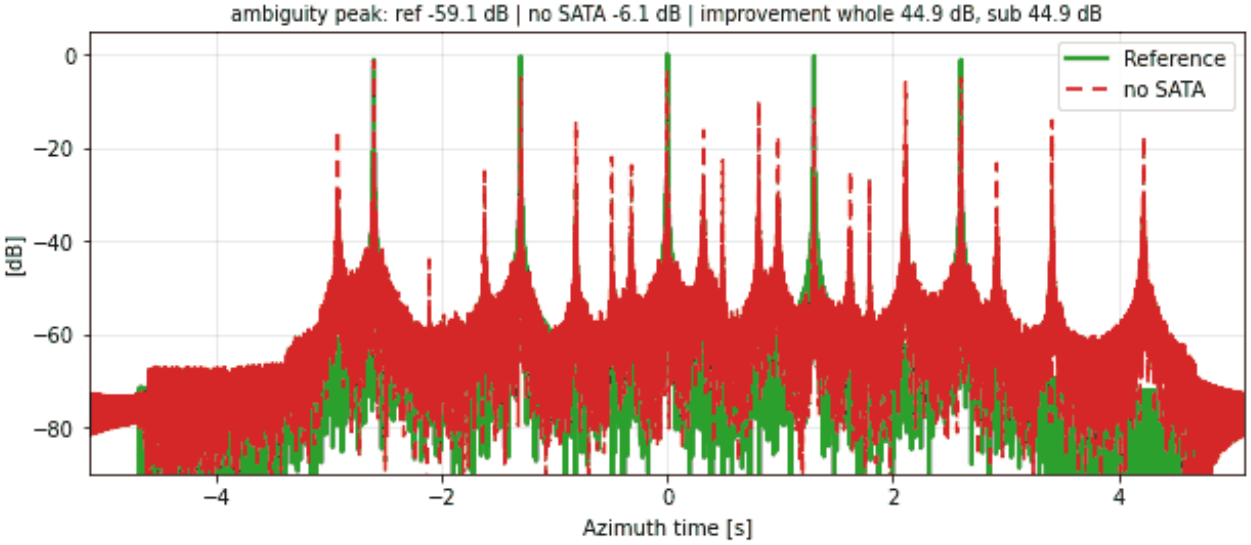


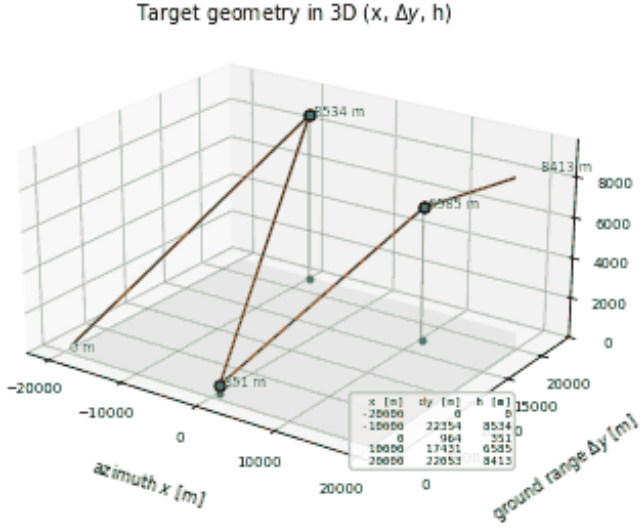



RH-LL-006 | SATA 1D | random heights: N = 5, heights $\sim U(0, 13000)$ m, seed 1, targets 10 km apart (large distance), large heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

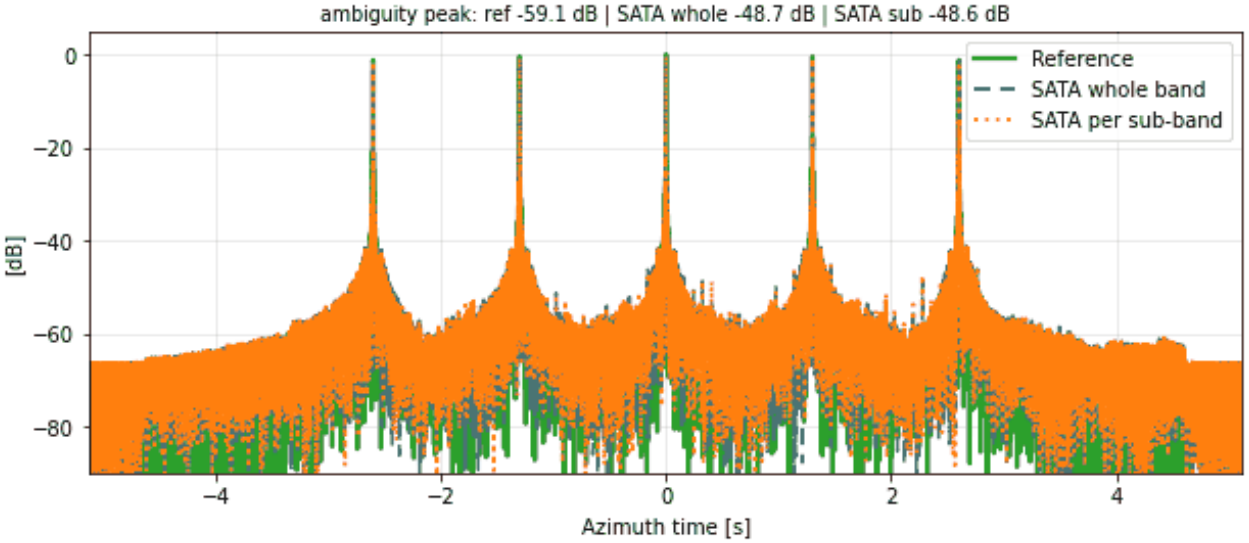


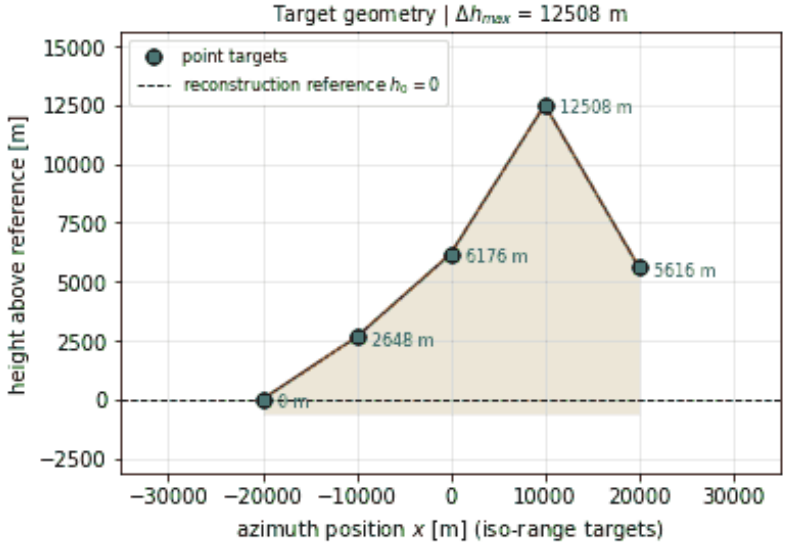


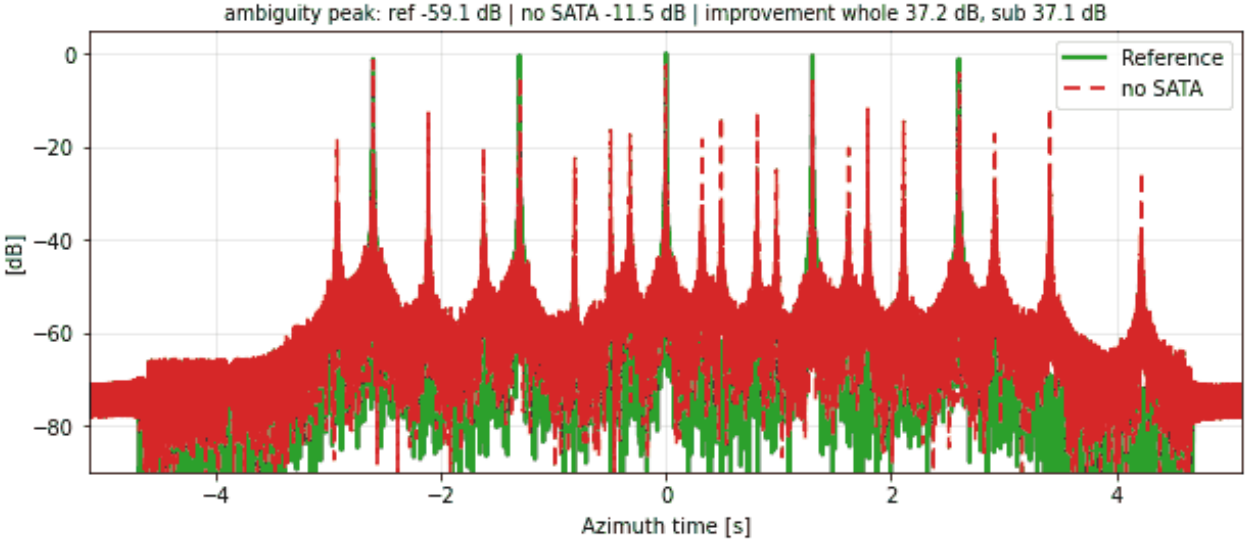


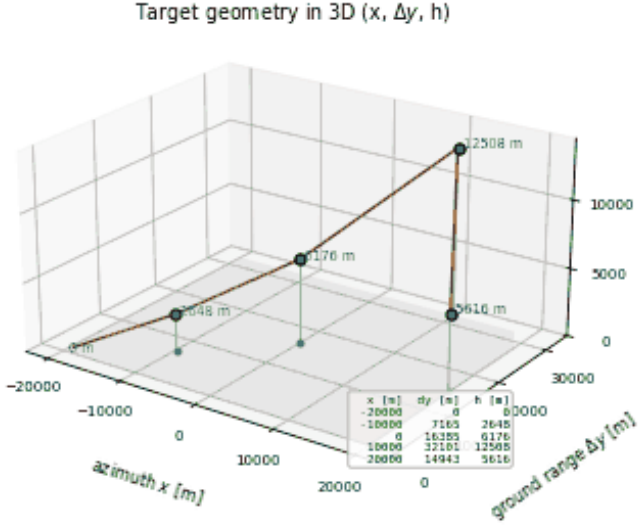


PW-SS-001 | SATA 1D | piecewise ramp: N = 5, random slopes over 20-m steps, seed 0, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

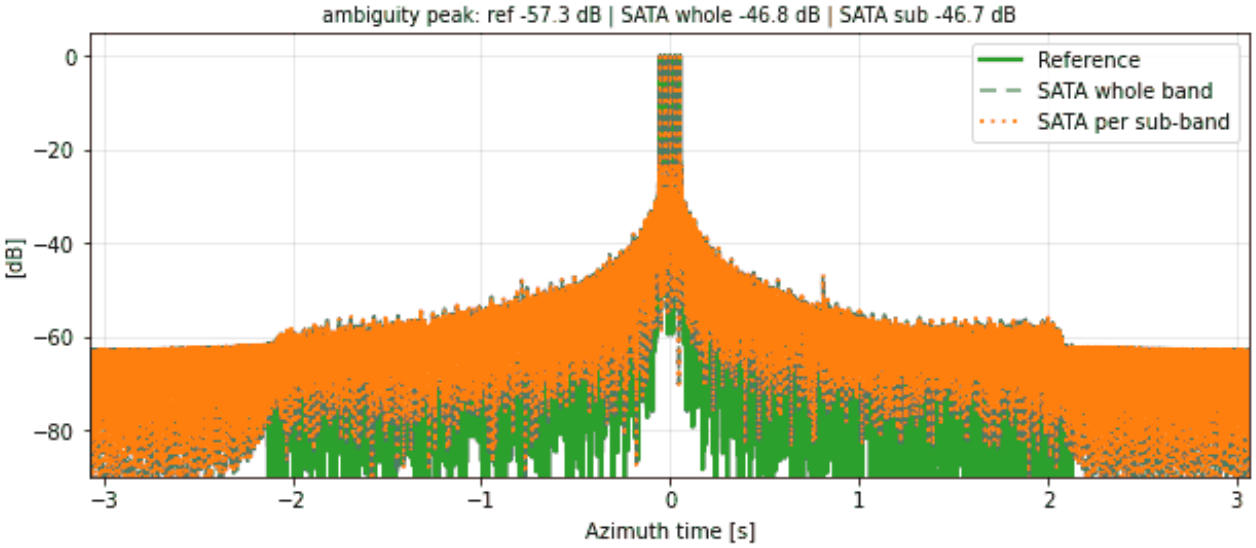


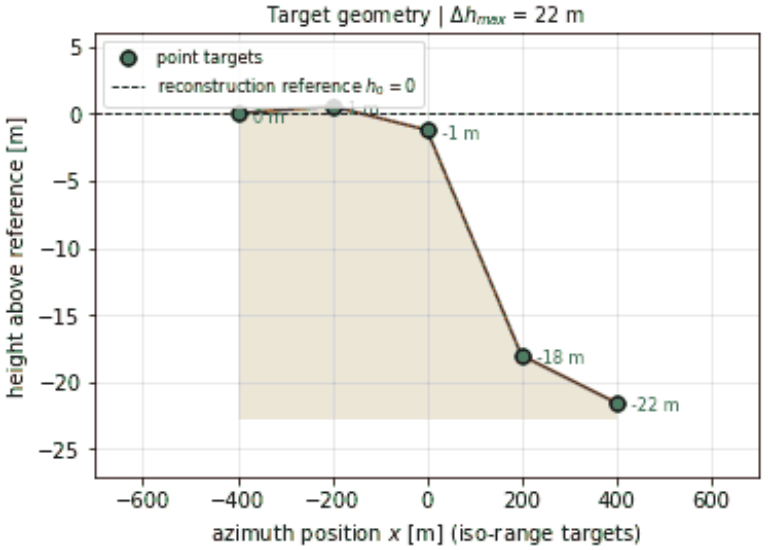


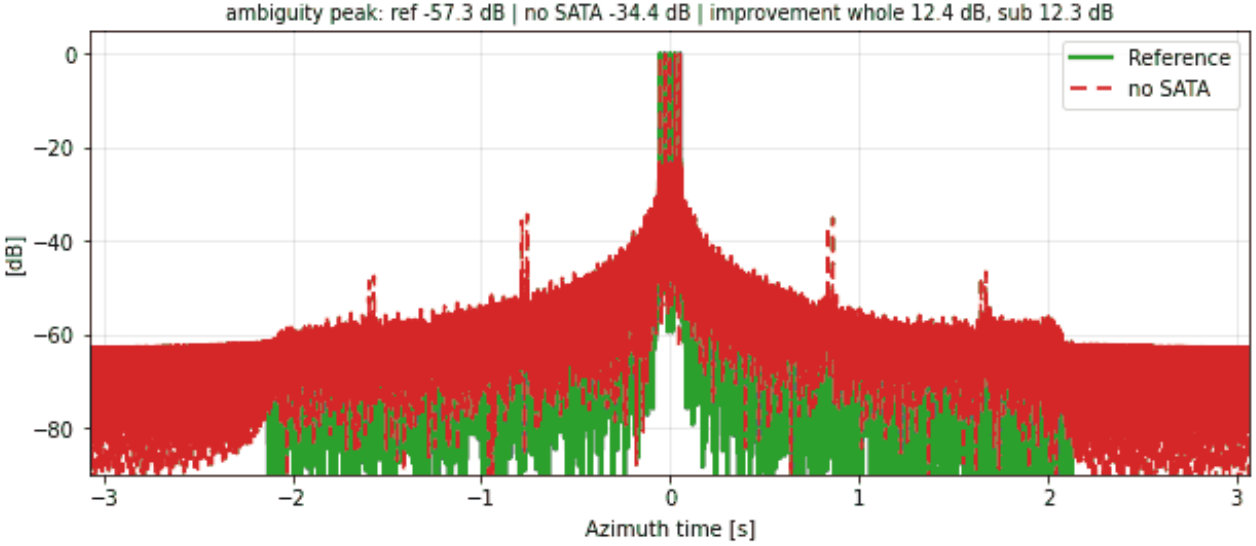


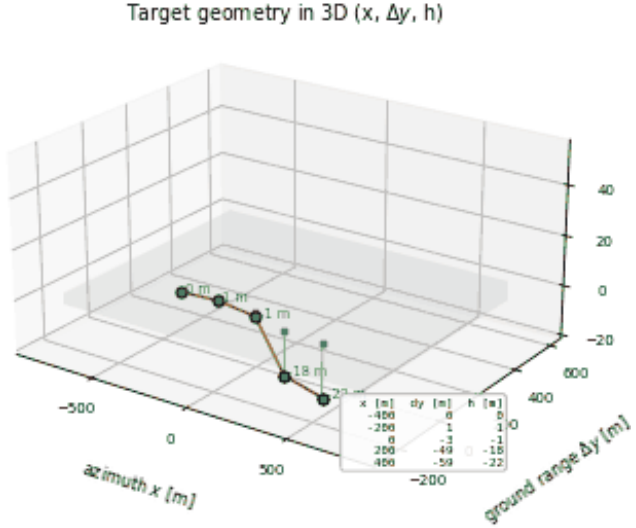


PW-SS-002 | SATA 1D | piecewise ramp: N = 5, random slopes over 20-m steps, seed 1, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

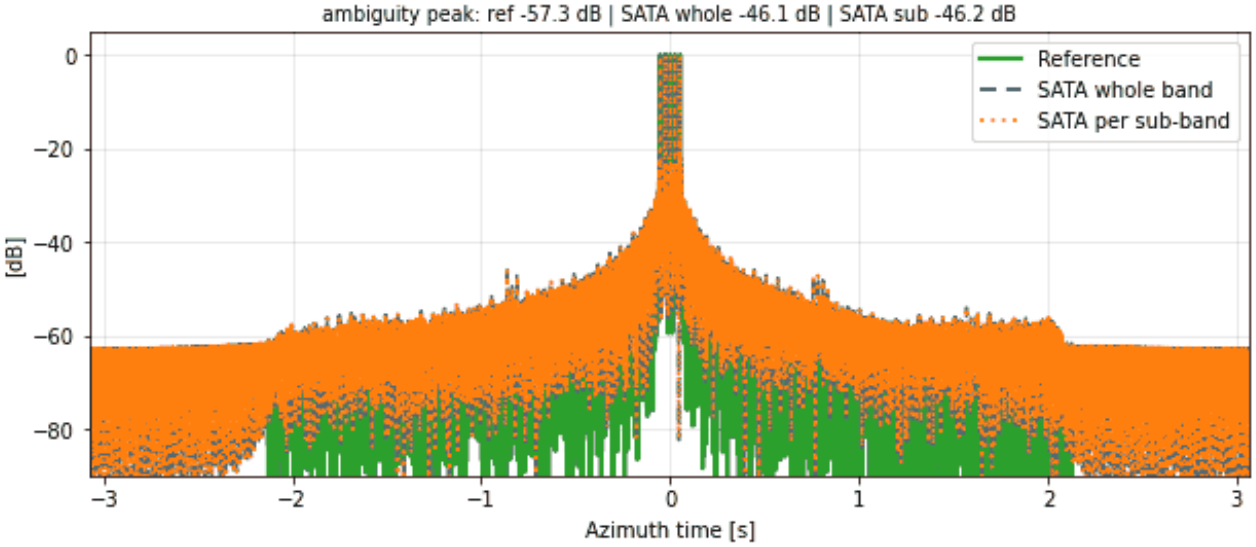


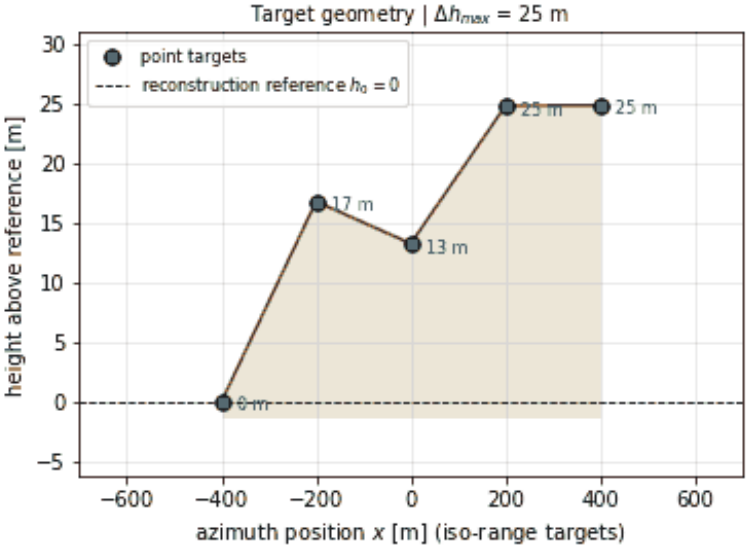


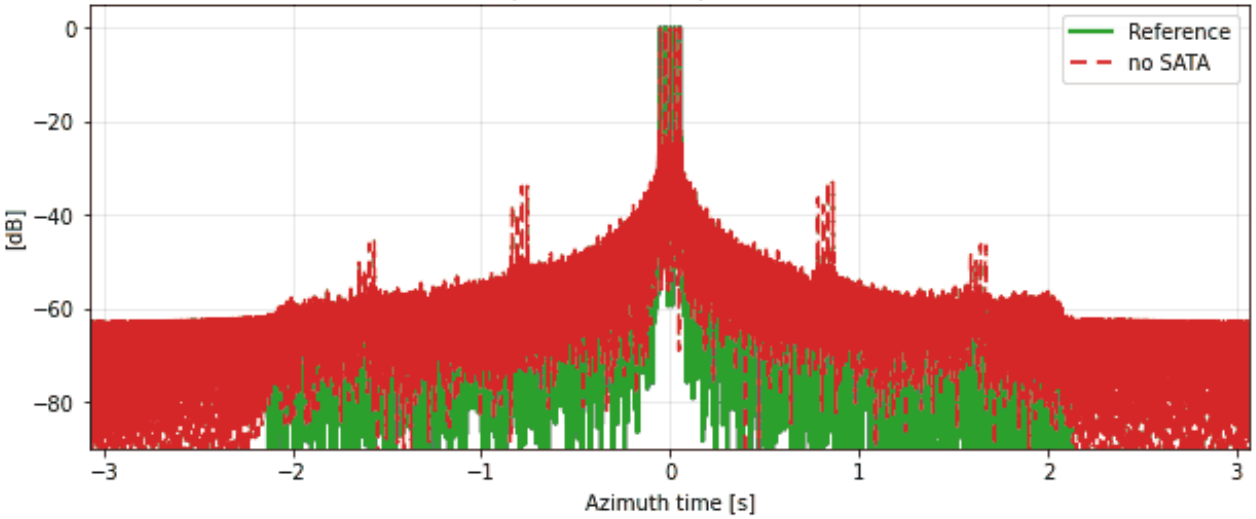


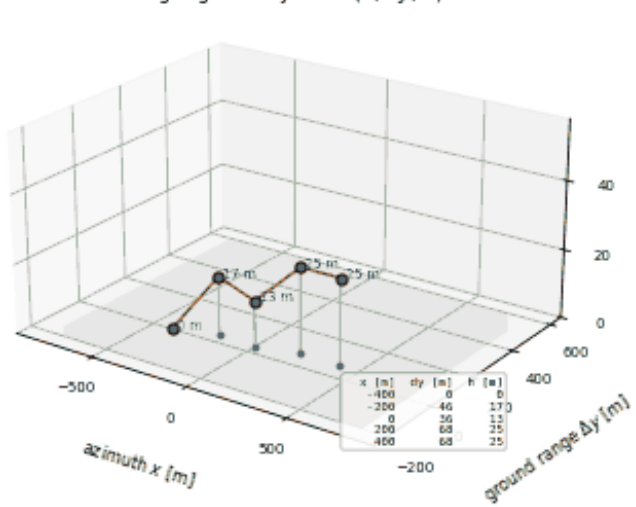


PW-SS-003 | SATA 1D | piecewise ramp: N = 5, random slopes over 20-m steps, seed 2, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

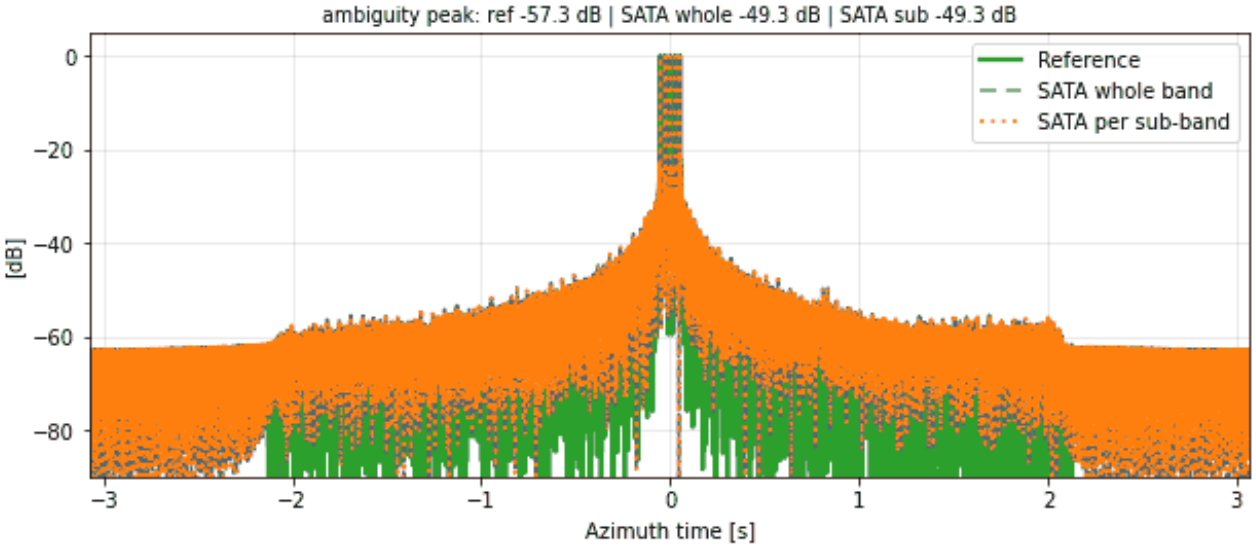


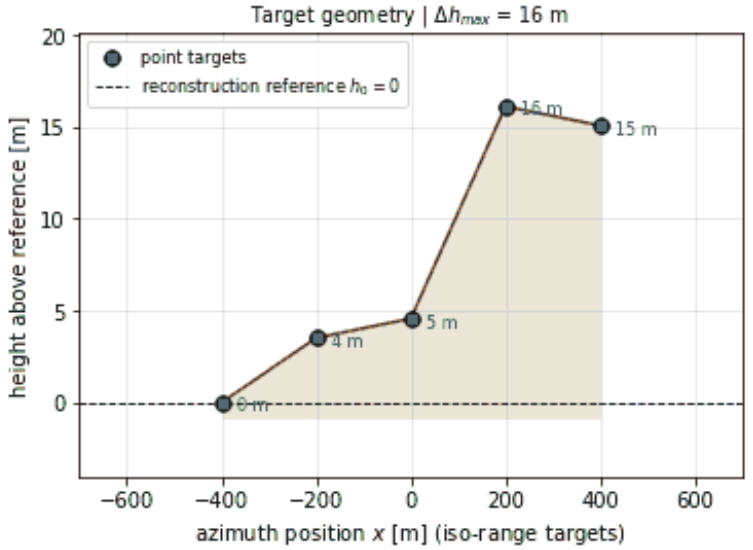


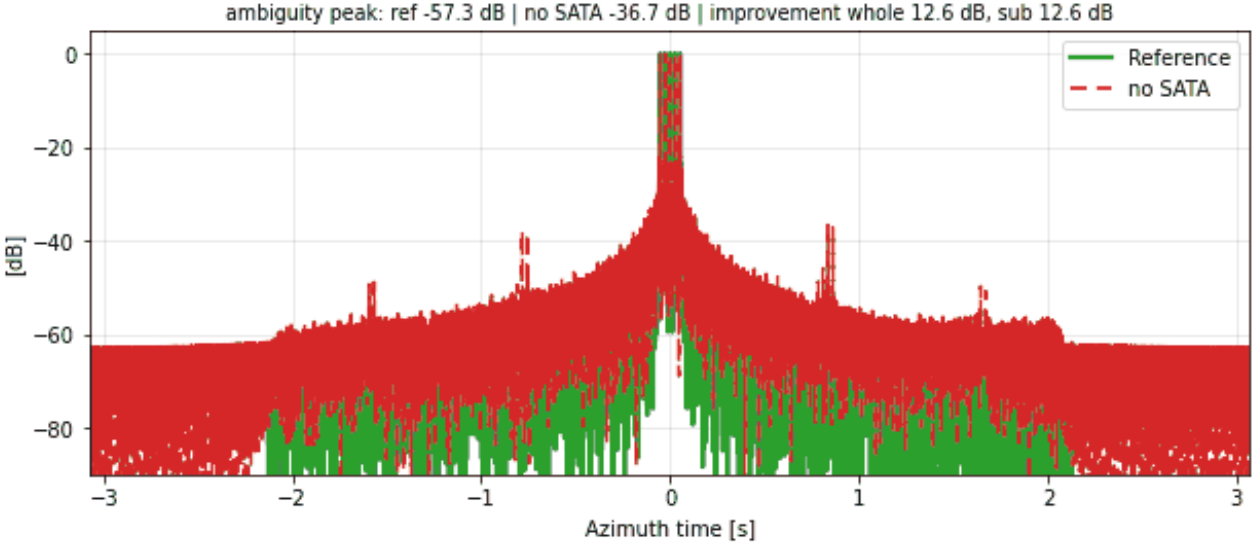


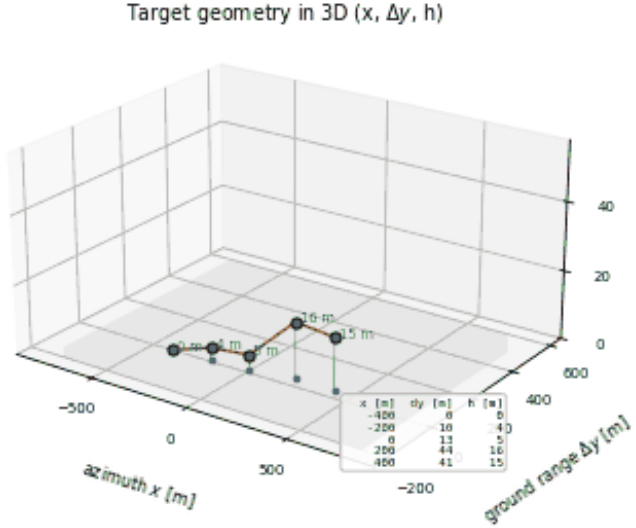


PW-SS-004 | SATA 1D | piecewise ramp: N = 5, random slopes over 20-m steps, seed 3, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

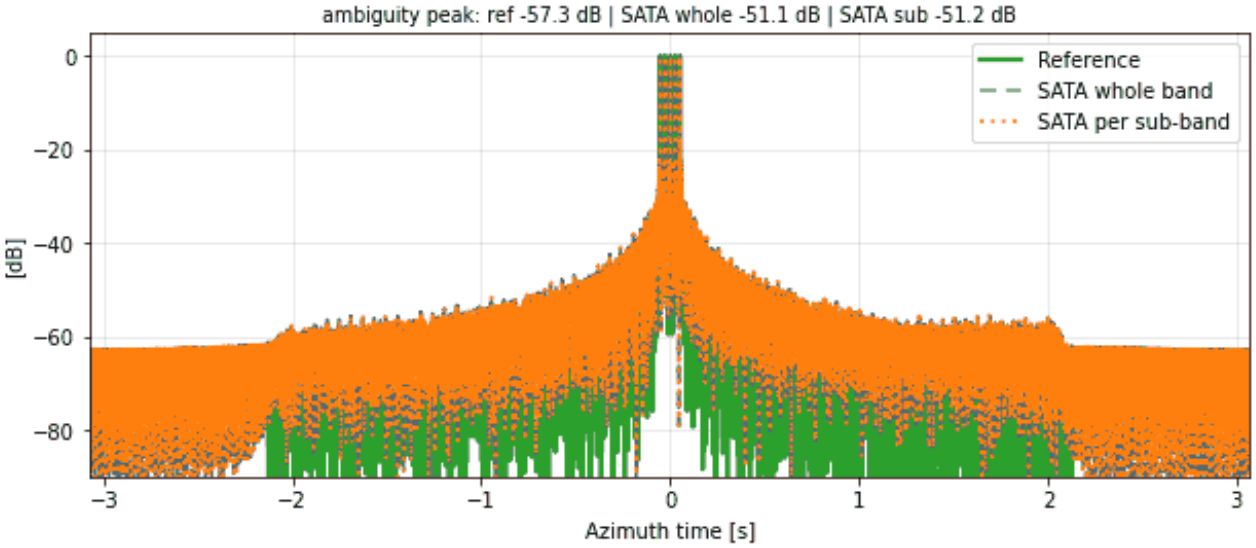


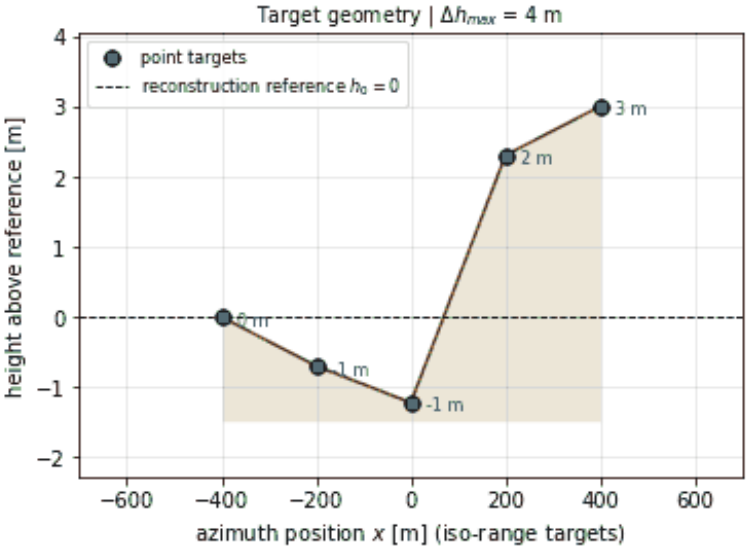


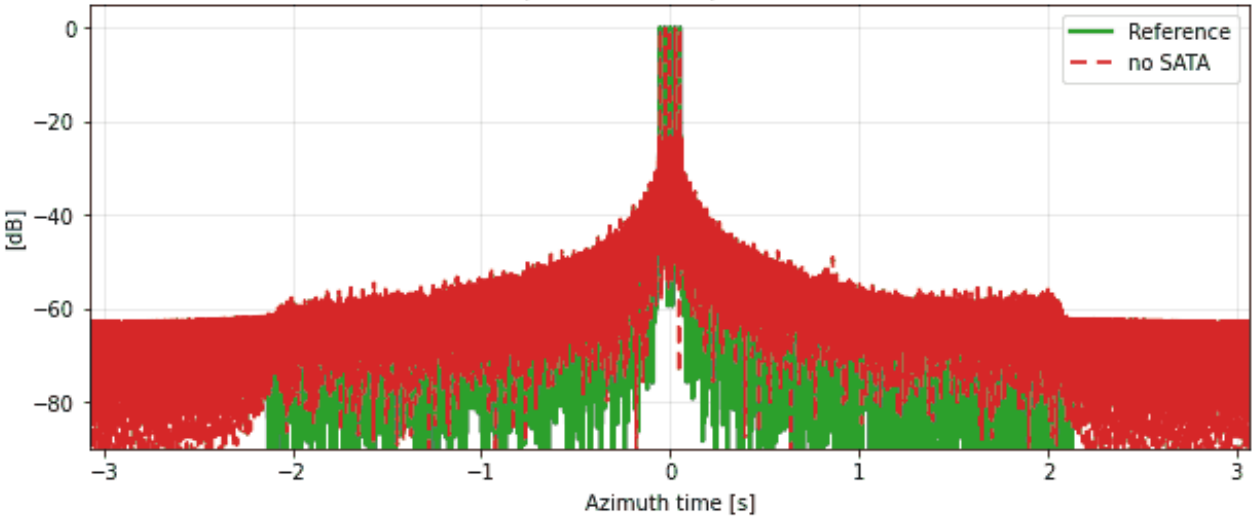


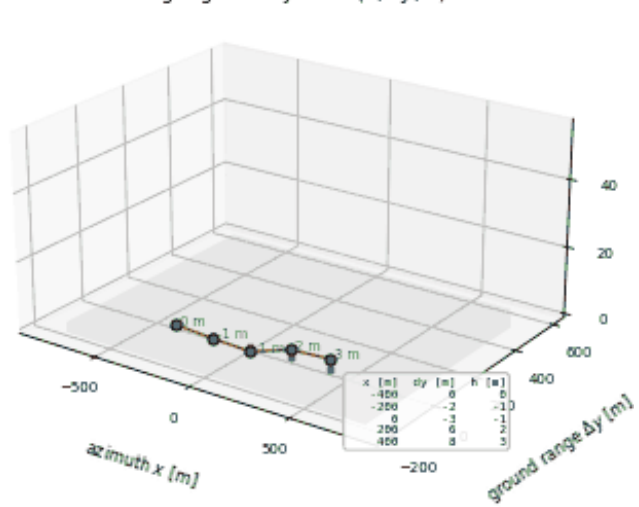


PW-SS-005 | SATA 1D | piecewise ramp: N = 5, random slopes over 20-m steps, seed 4, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

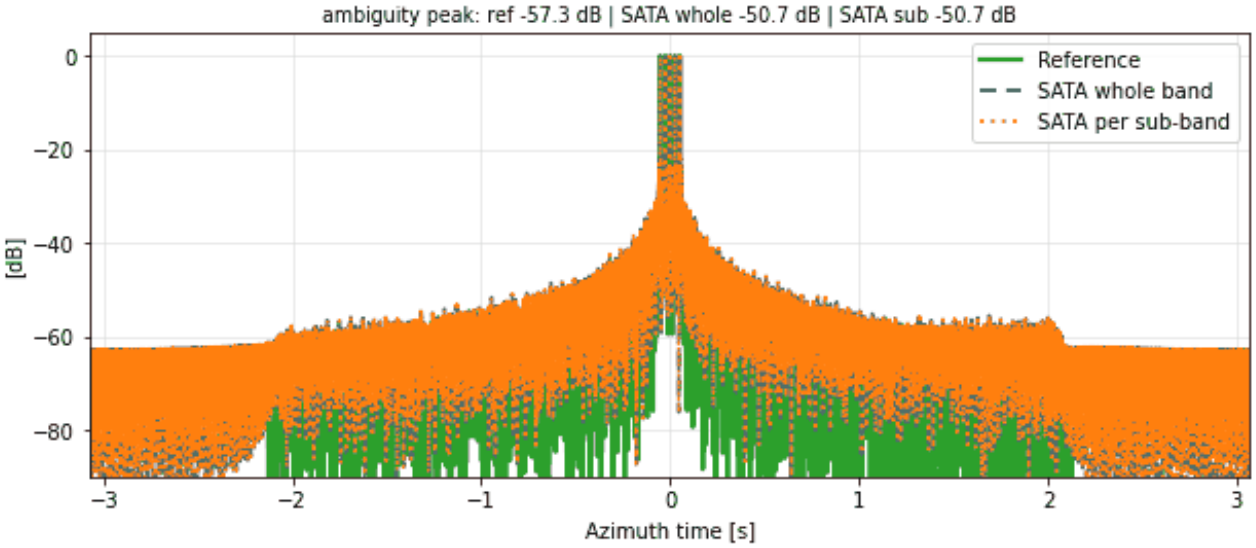


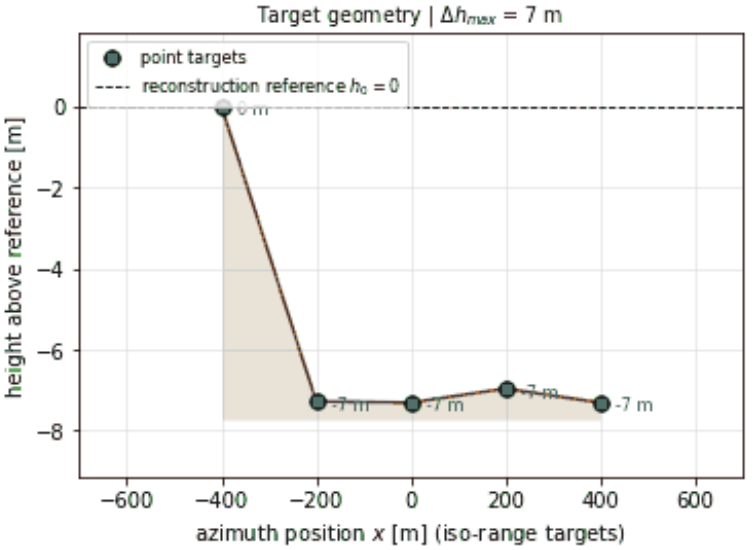


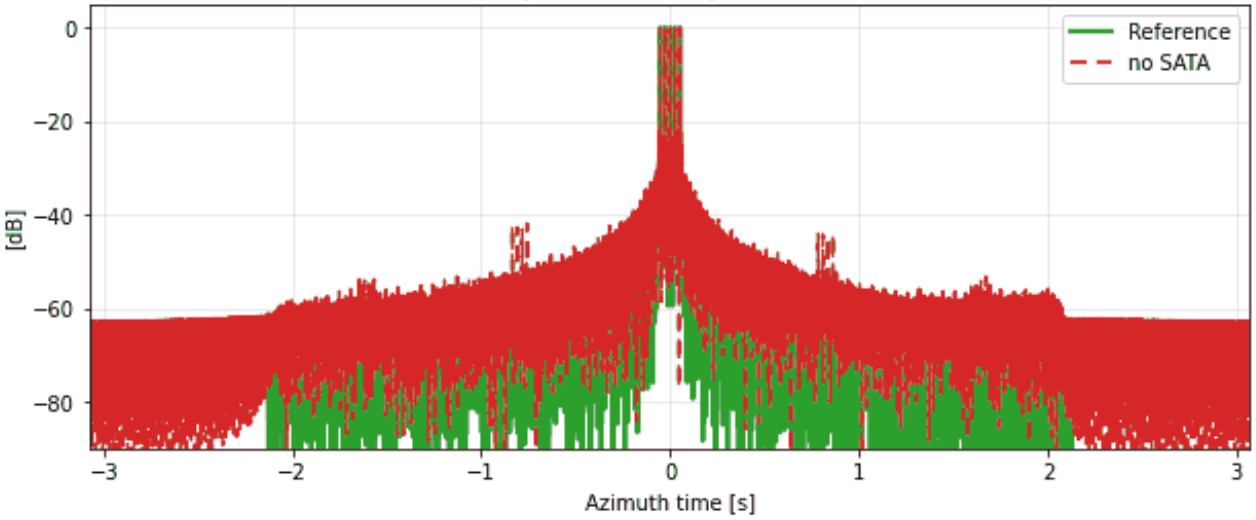


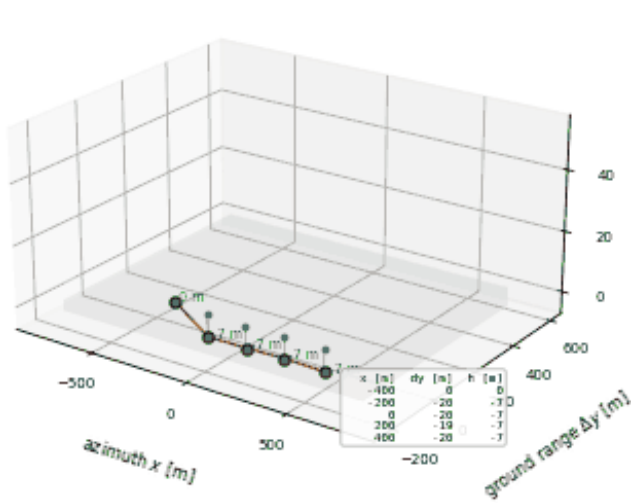


PW-SS-006 | SATA 1D | piecewise ramp: N = 9, random slopes over 20-m steps, seed 0, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

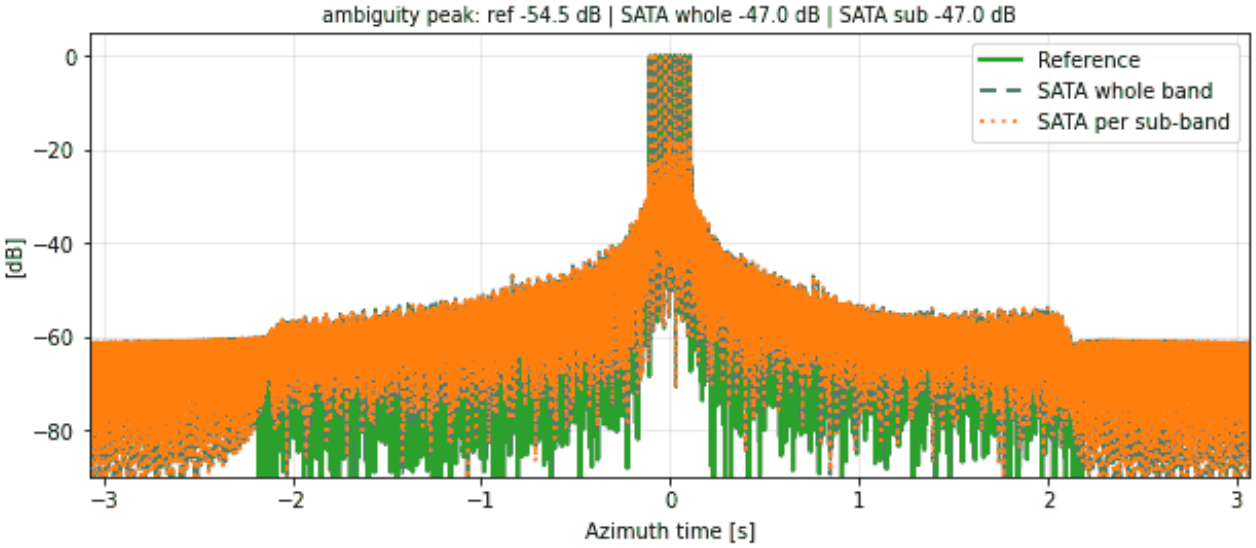


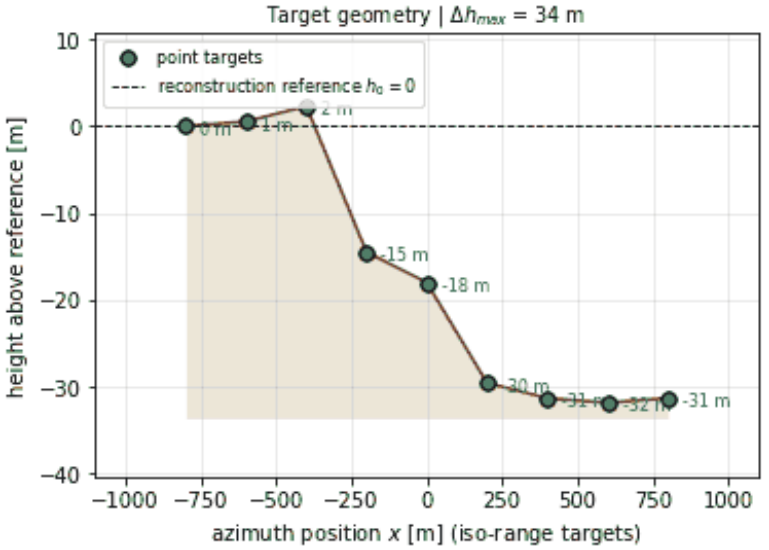


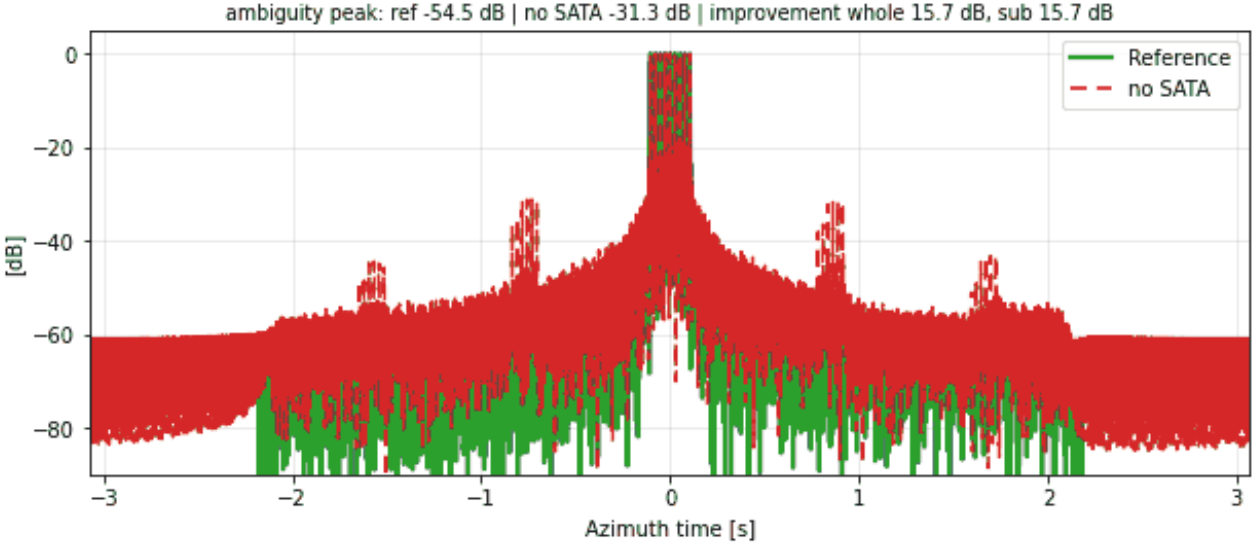


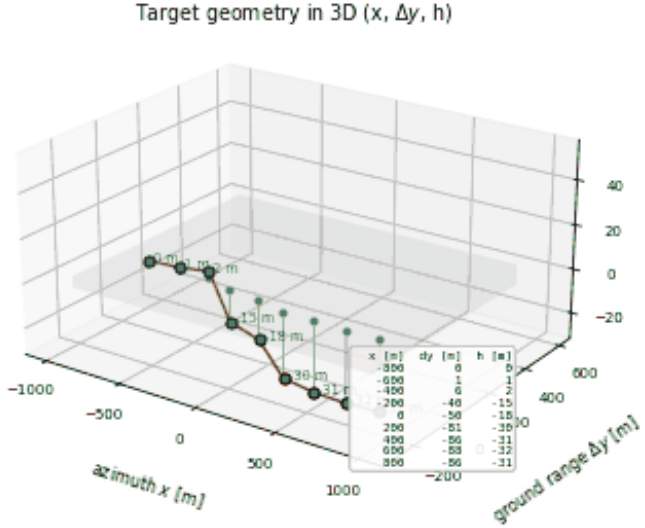


PW-SS-007 | SATA 1D | piecewise ramp: N = 9, random slopes over 20-m steps, seed 1, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

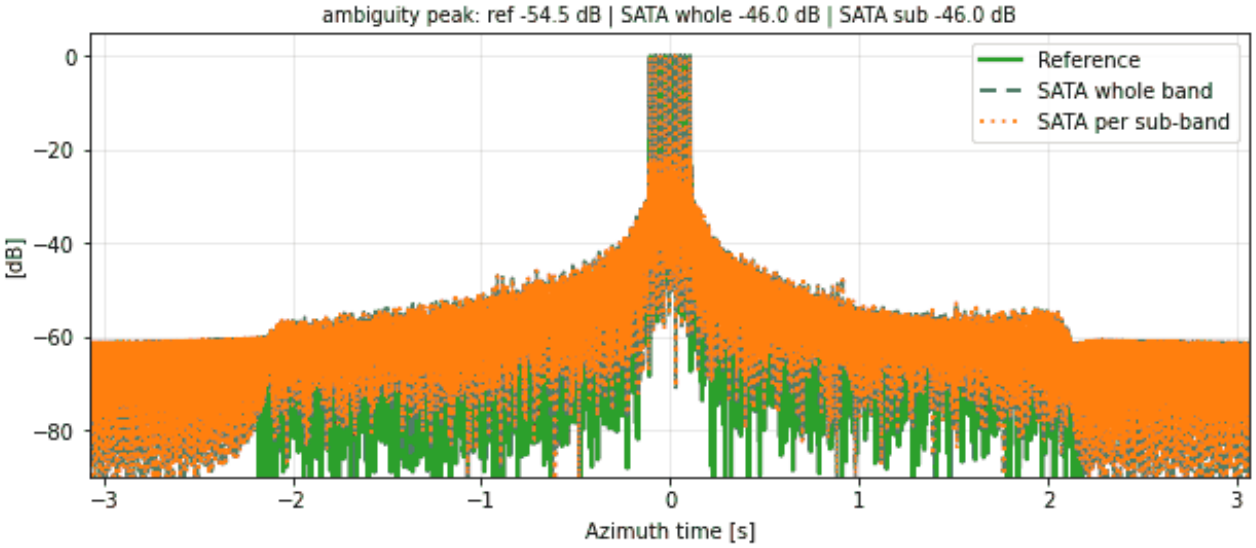


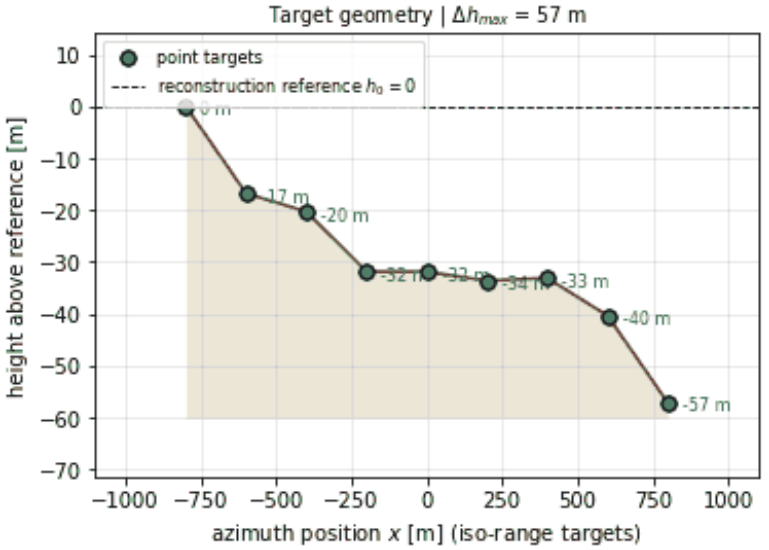


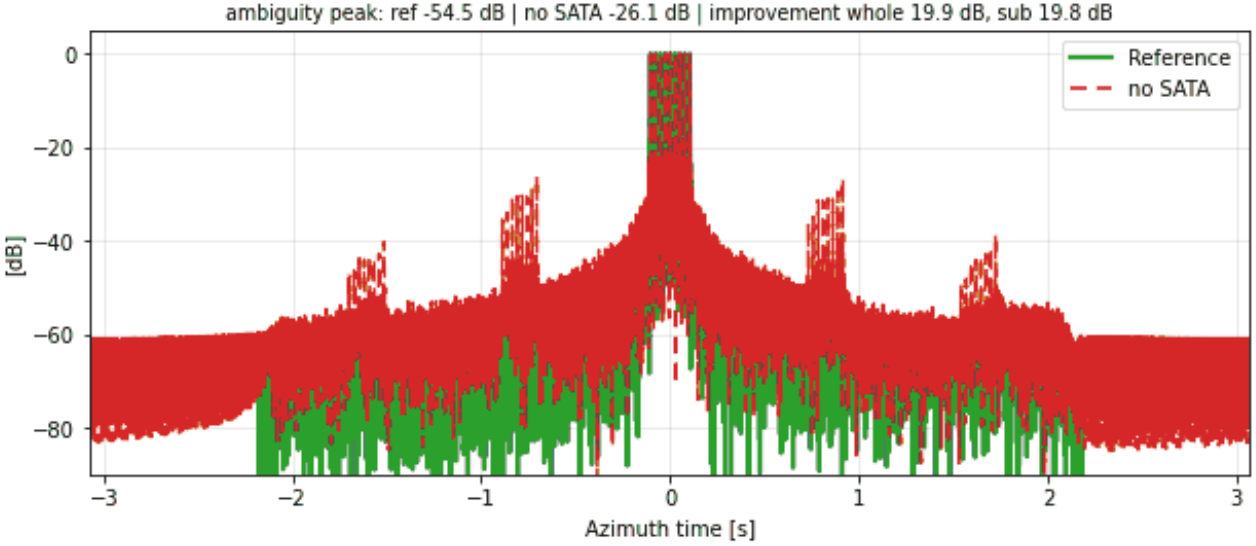


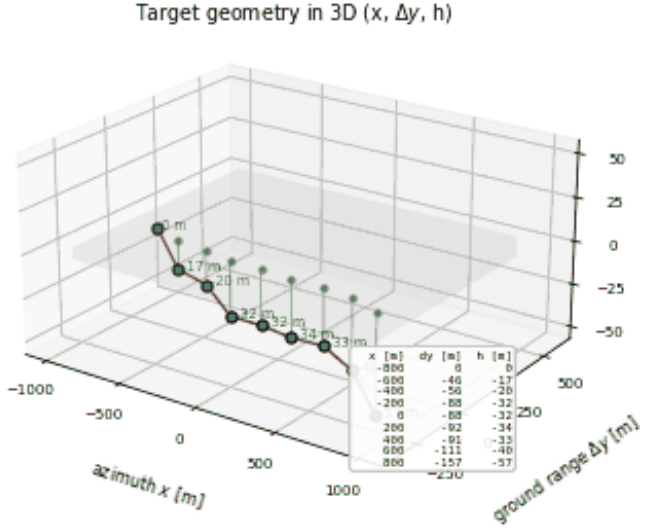


PW-SS-008 | SATA 1D | piecewise ramp: N = 9, random slopes over 20-m steps, seed 2, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

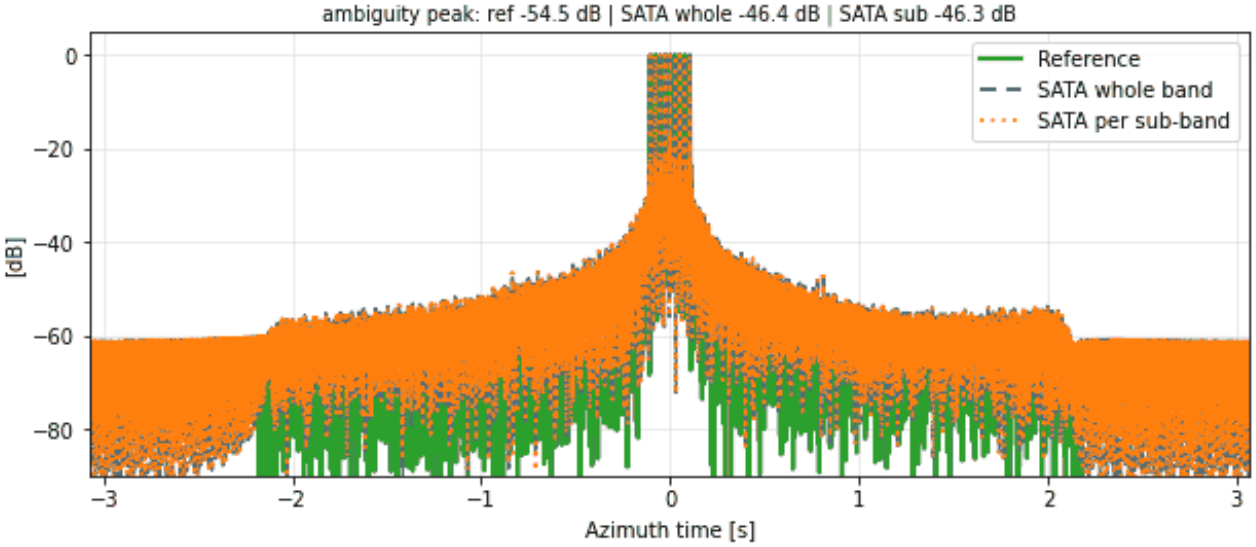


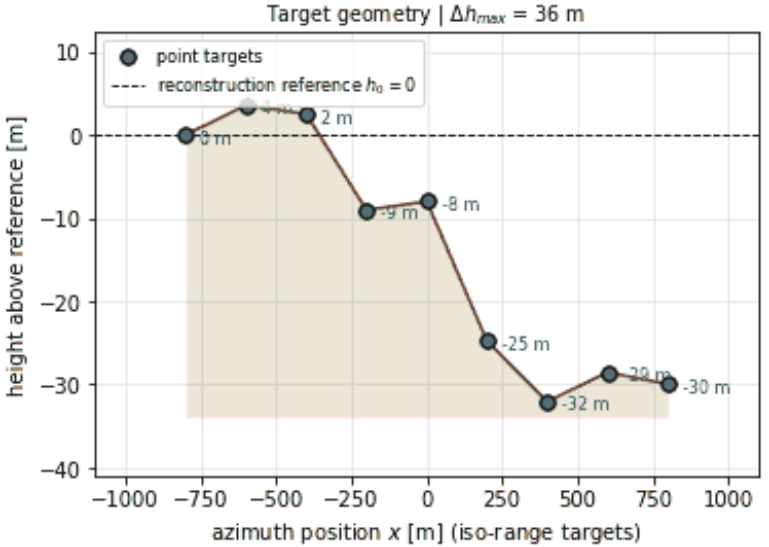


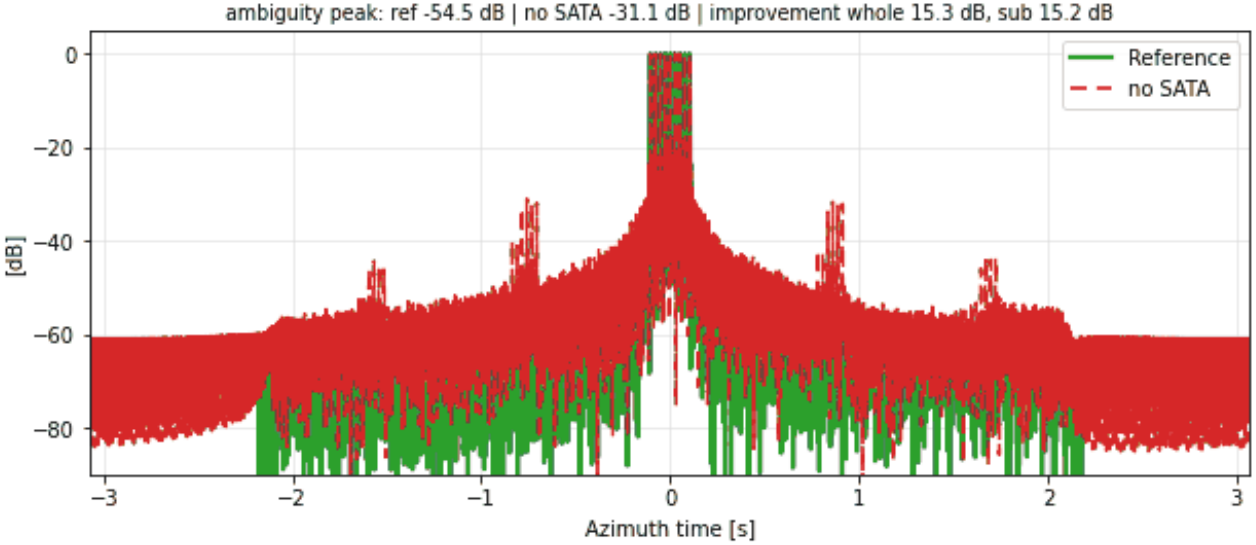


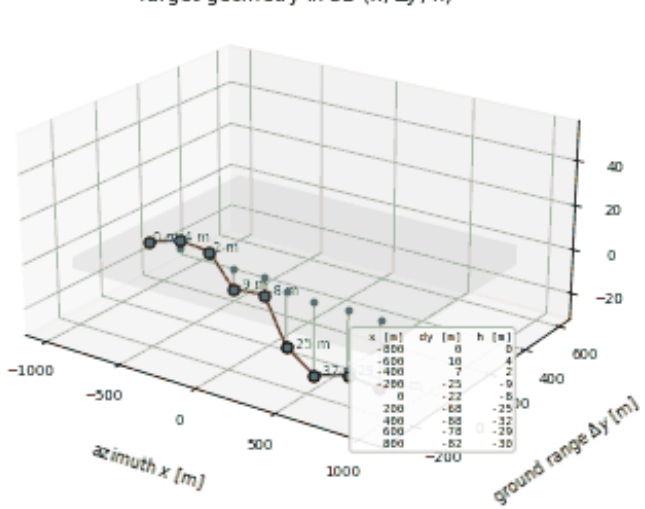


PW-SS-009 | SATA 1D | piecewise ramp: N = 9, random slopes over 20-m steps, seed 3, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

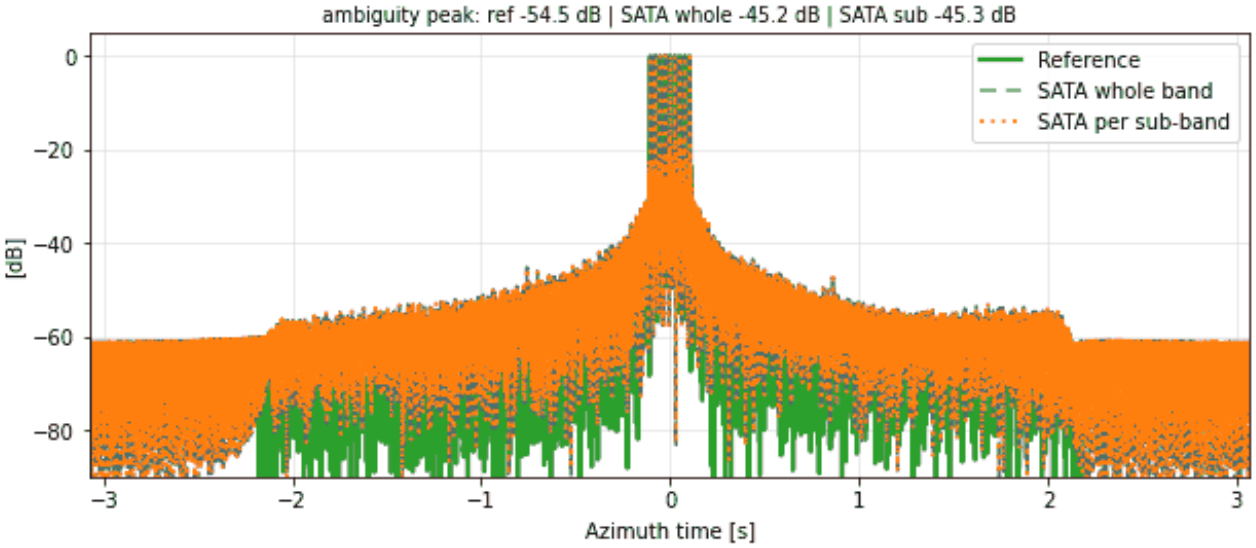


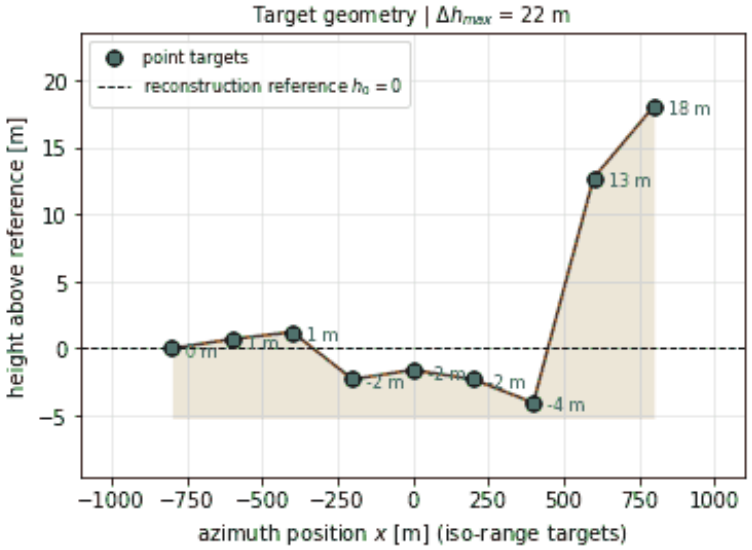


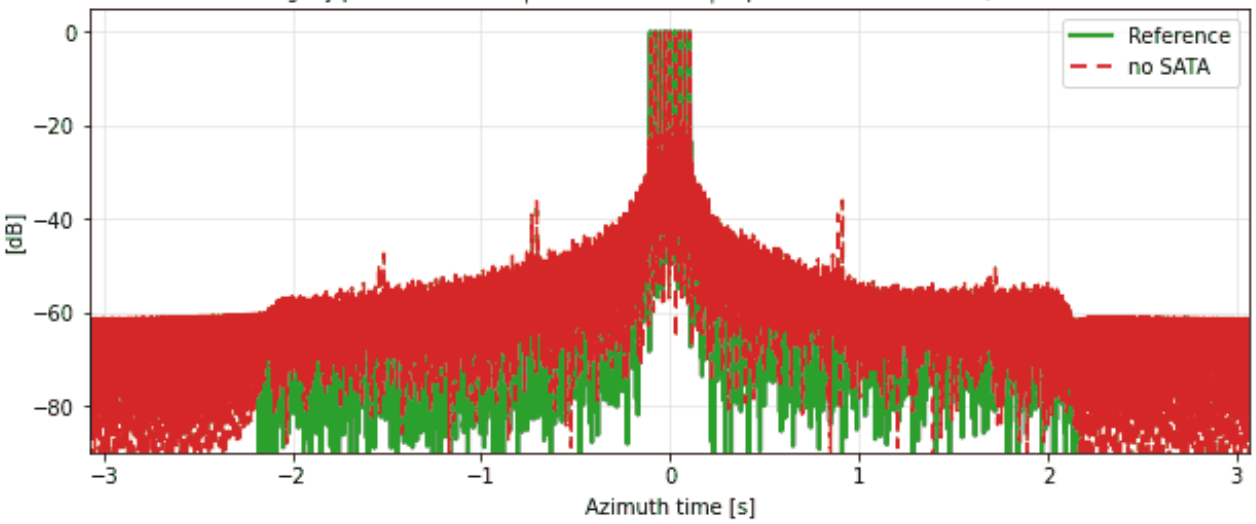


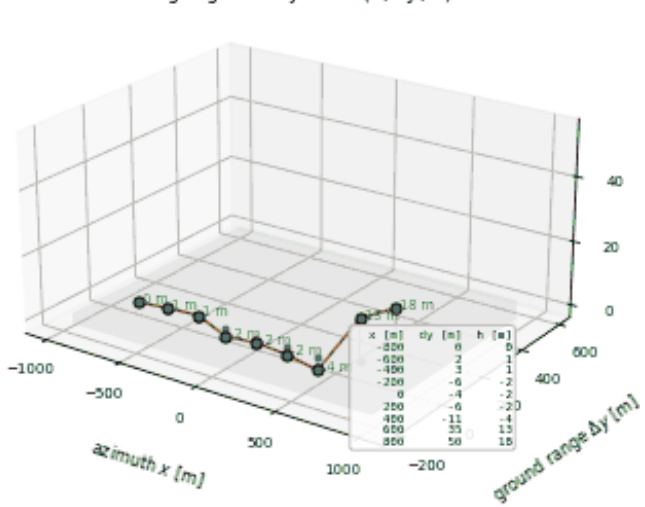


PW-SS-010 | SATA 1D | piecewise ramp: N = 9, random slopes over 20-m steps, seed 4, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

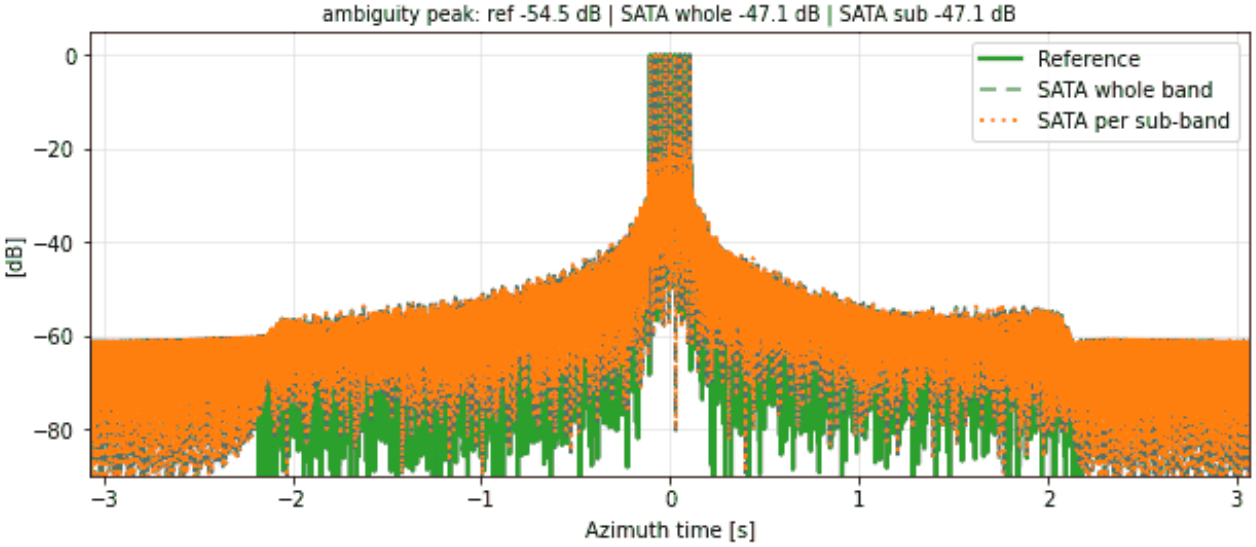


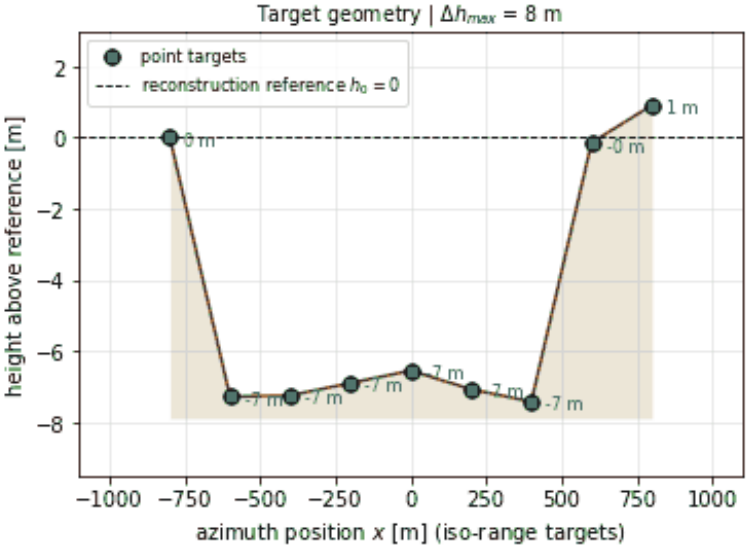


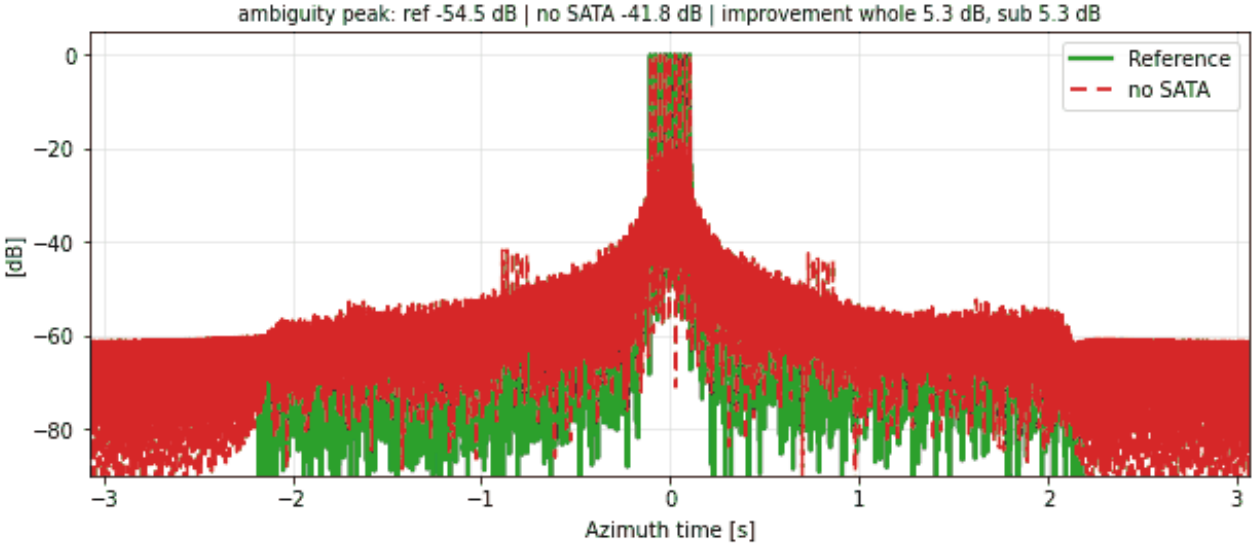


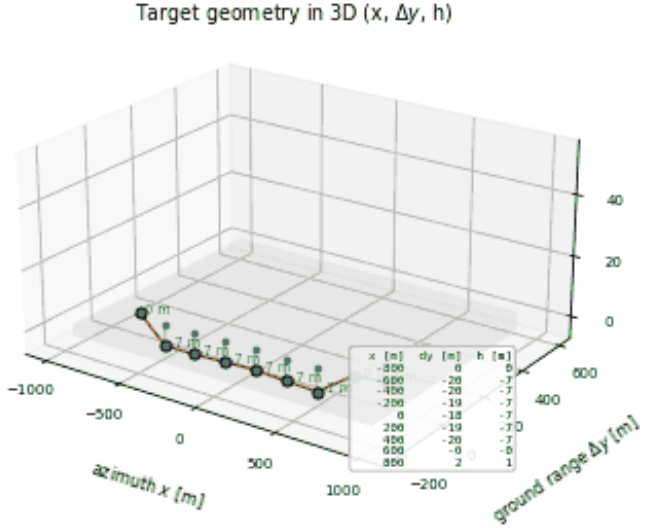


PW-SS-011 | SATA 1D | piecewise ramp: N = 13, random slopes over 20-m steps, seed 0, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

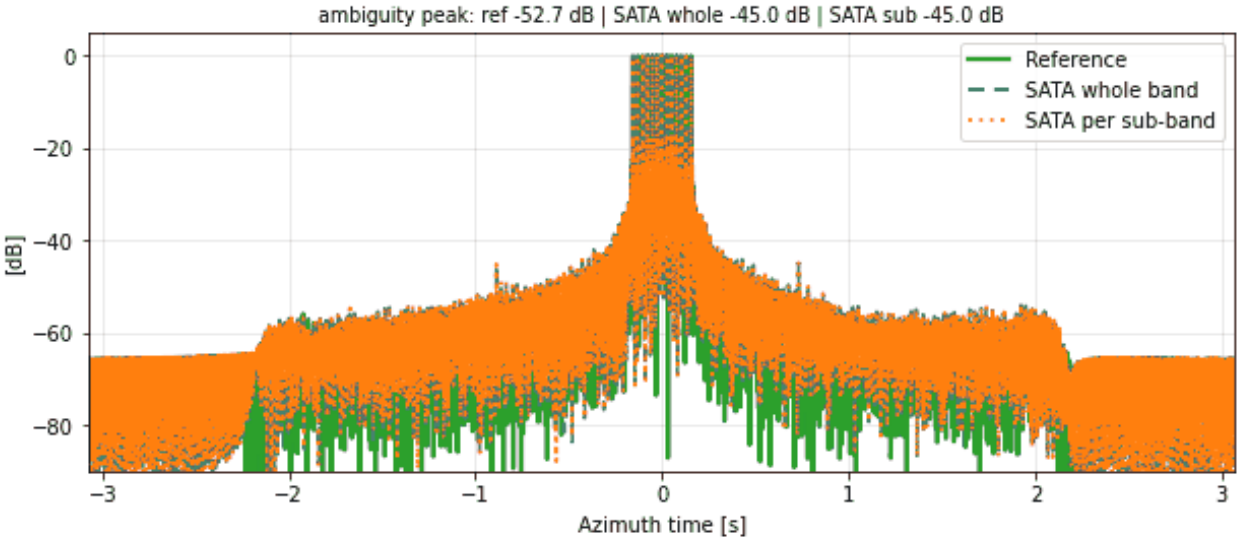


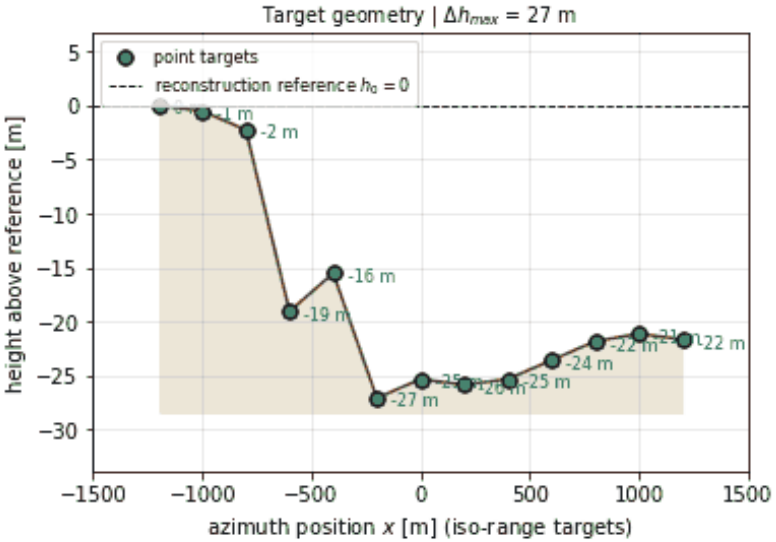


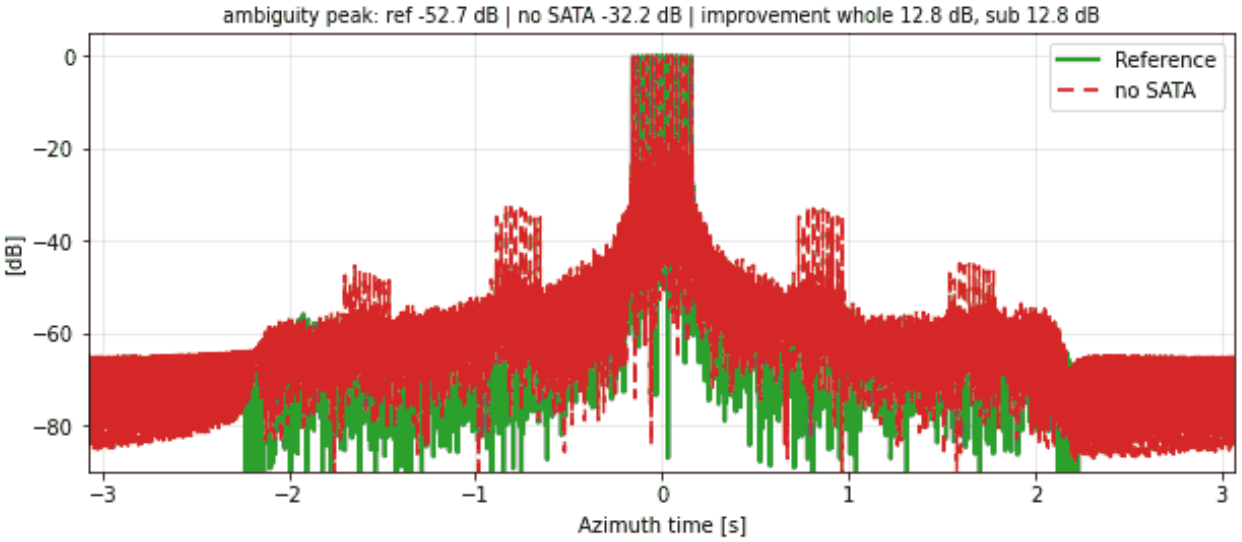


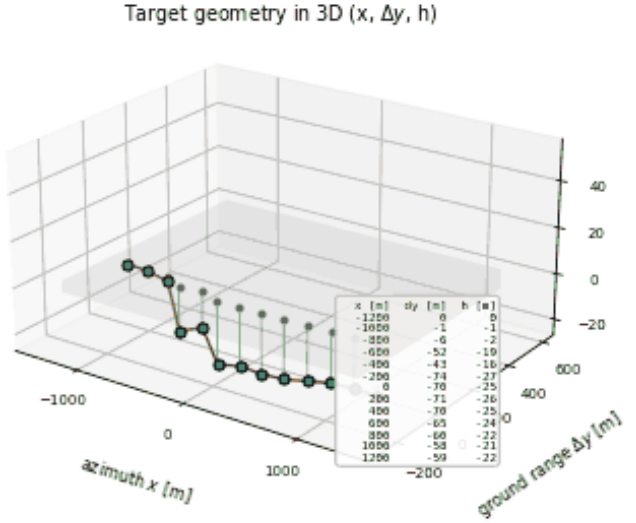


PW-SS-012 | SATA 1D | piecewise ramp: N = 13, random slopes over 20-m steps, seed 1, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

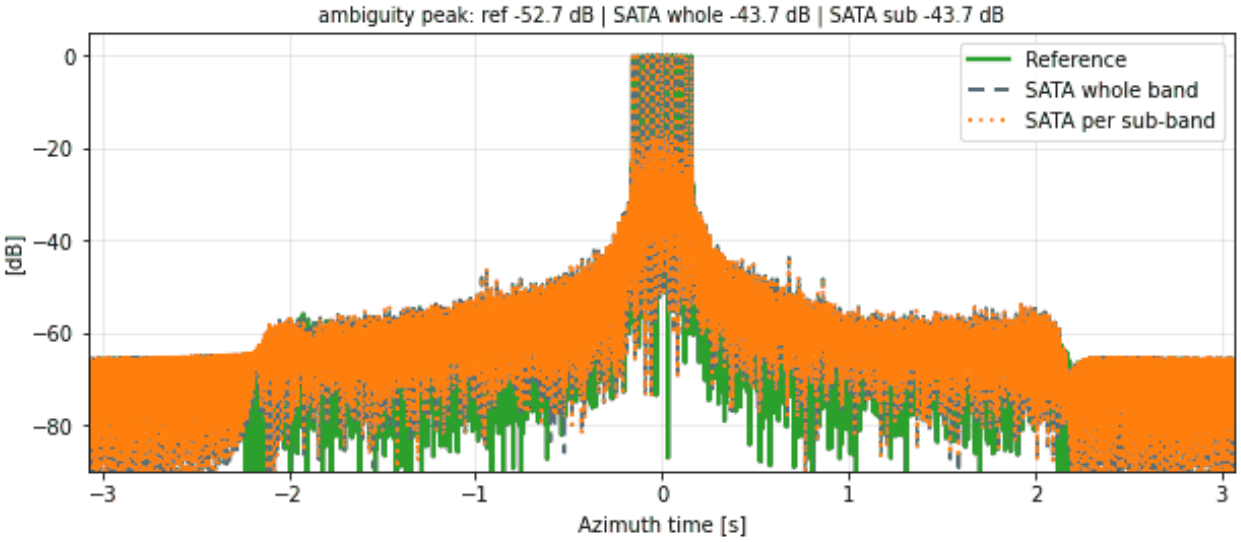


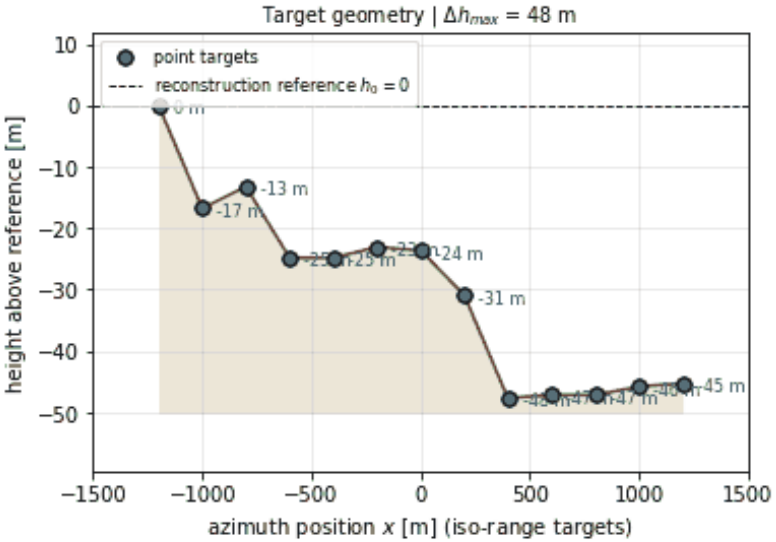


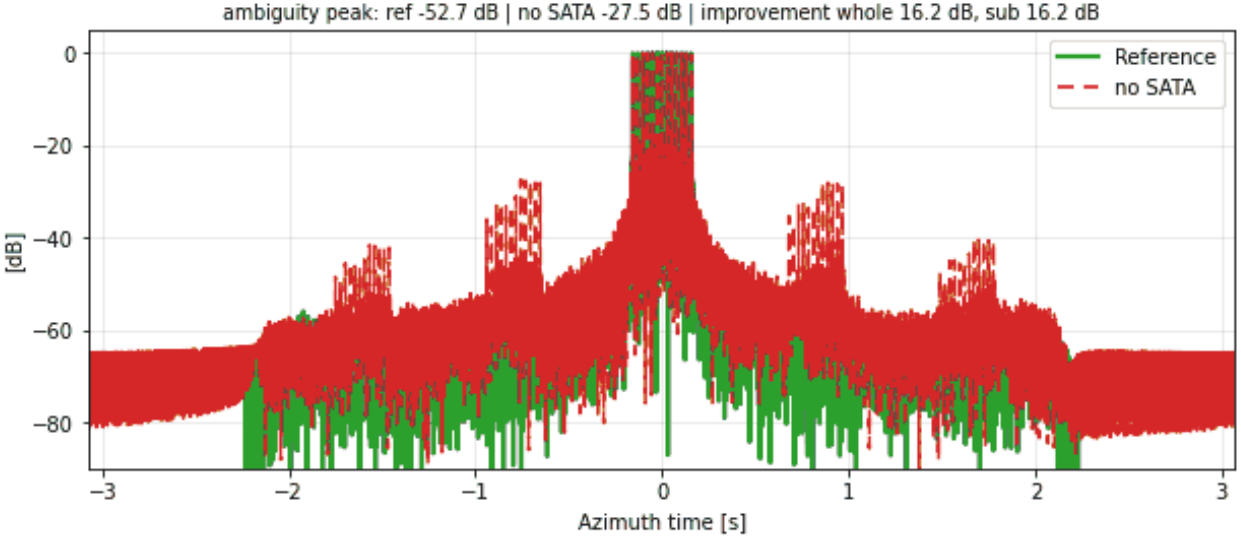


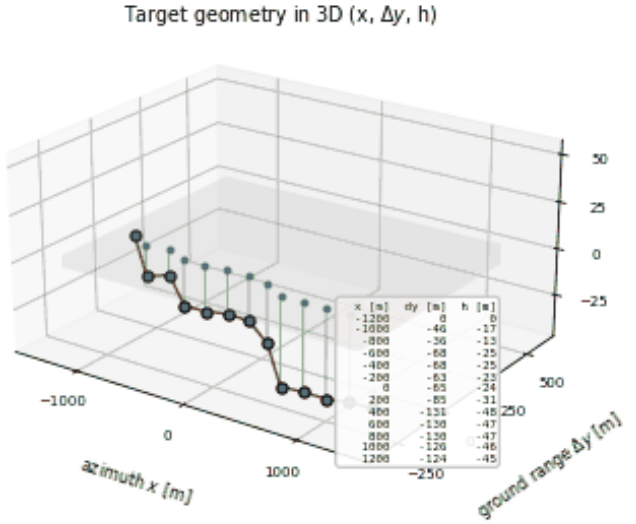


PW-SS-013 | SATA 1D | piecewise ramp: N = 13, random slopes over 20-m steps, seed 2, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

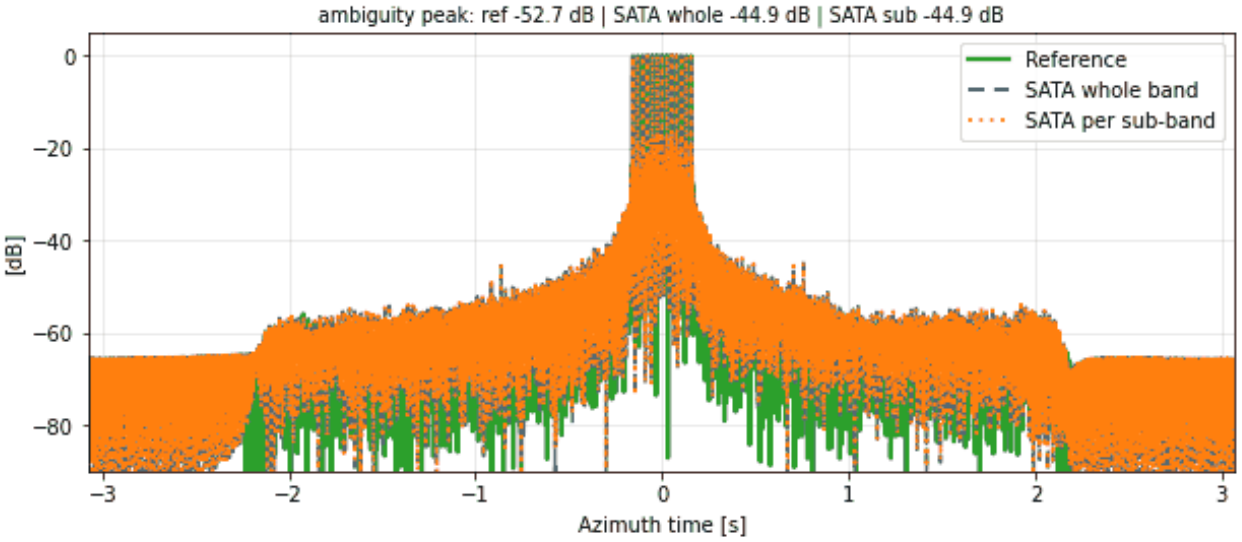


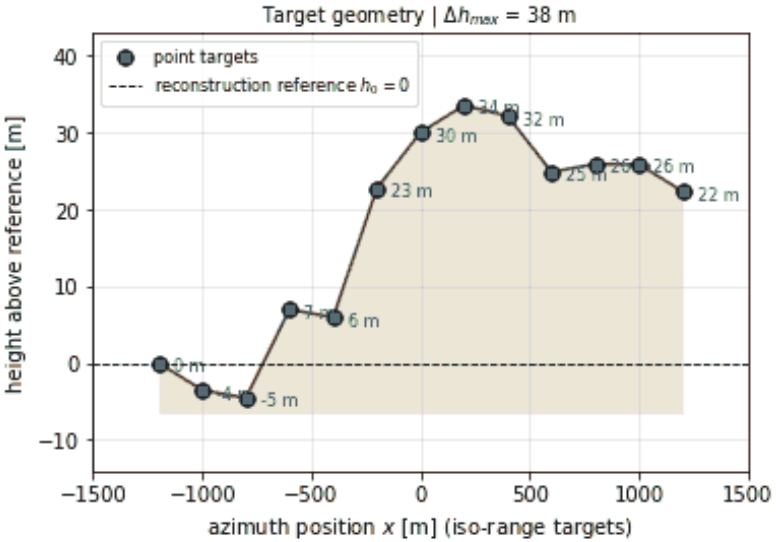


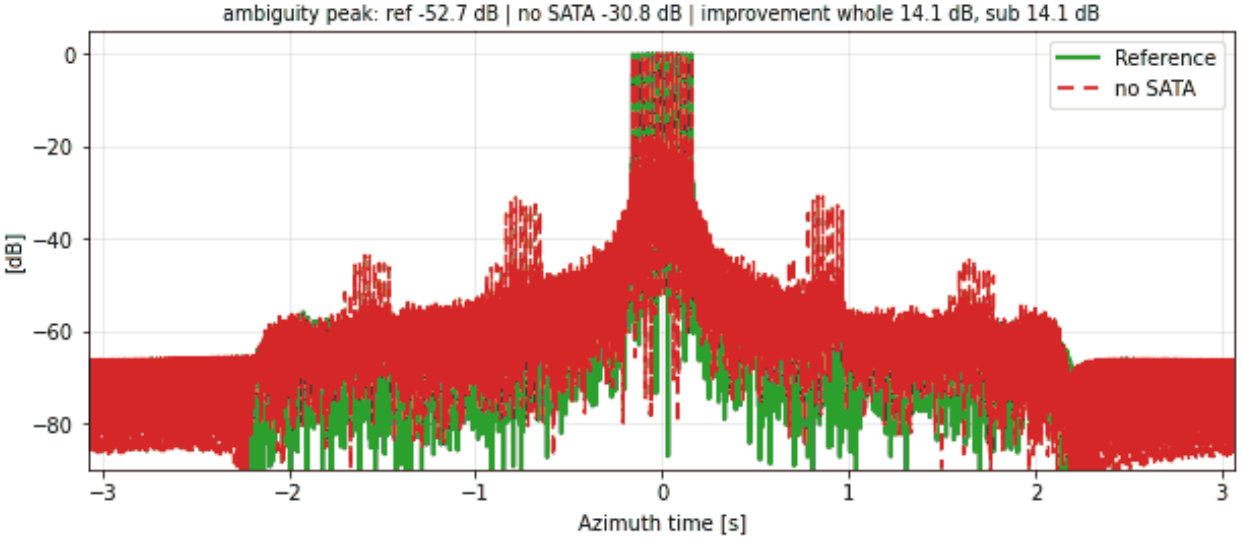


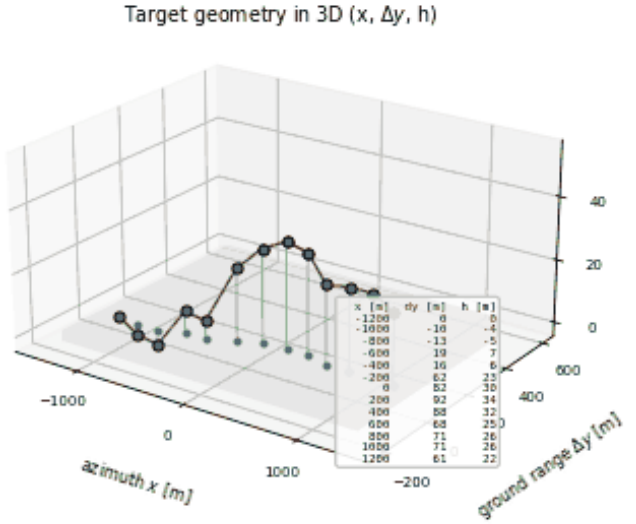


PW-SS-014 | SATA 1D | piecewise ramp: N = 13, random slopes over 20-m steps, seed 3, targets 200 m apart (small distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

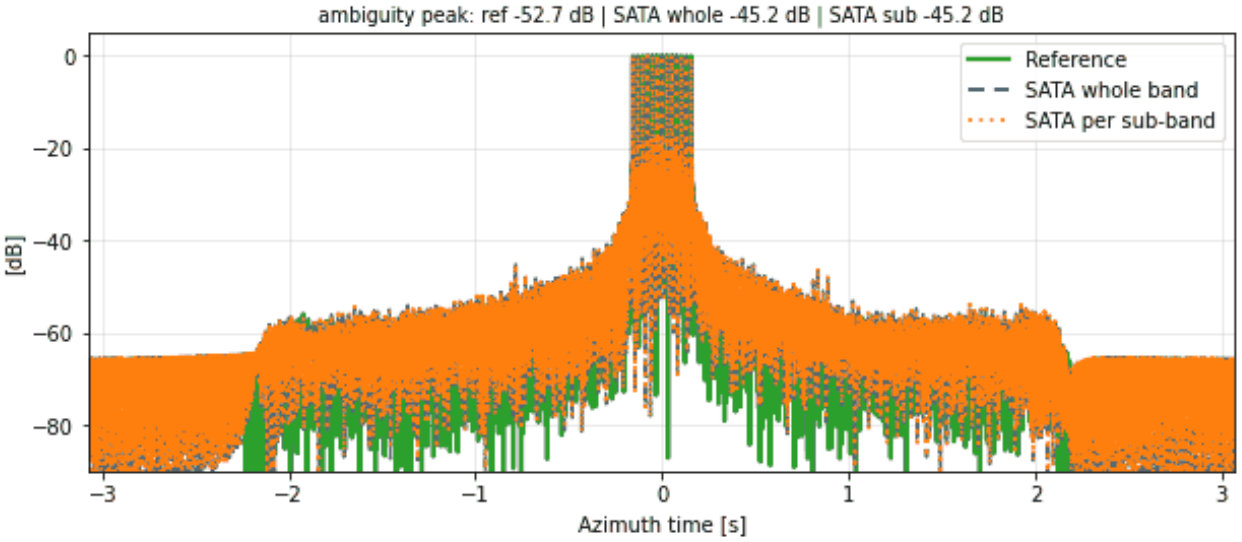

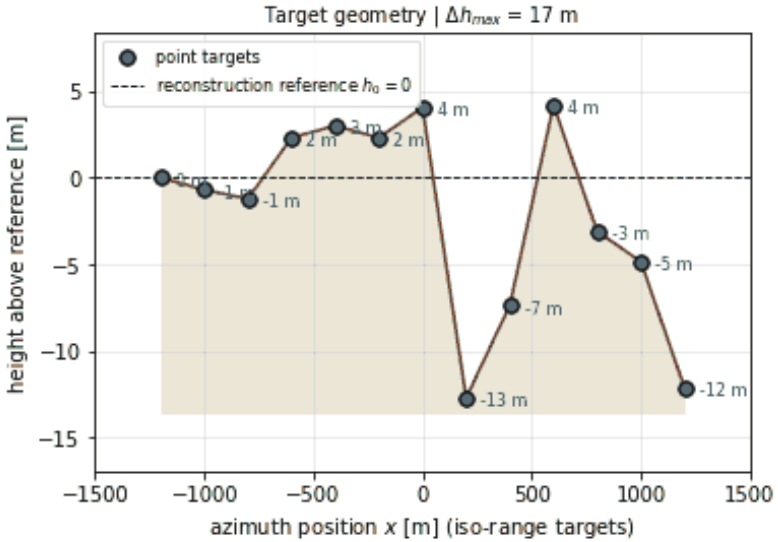


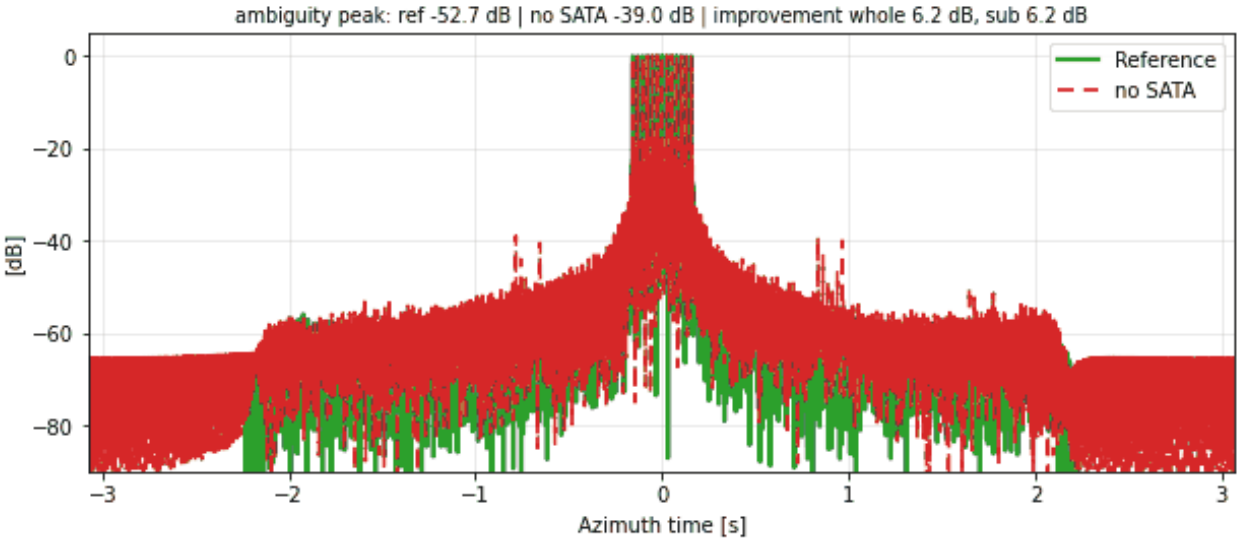


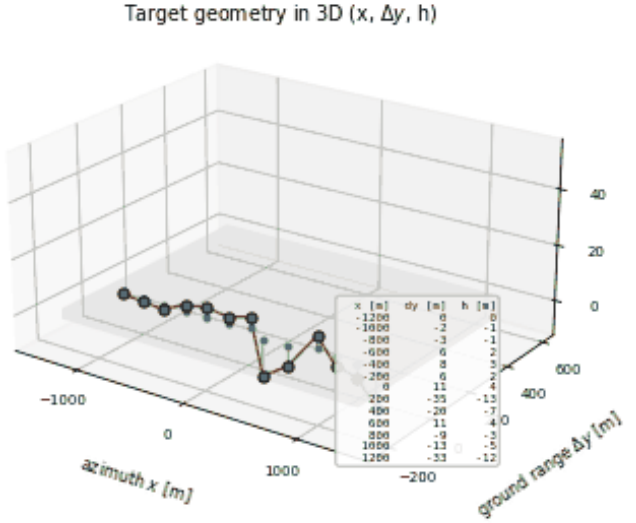



PW-SS-015 | SATA 1D | piecewise ramp: N = 13, random slopes over 20-m steps, seed 4, targets 200 m apart (small distance), small heights

b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

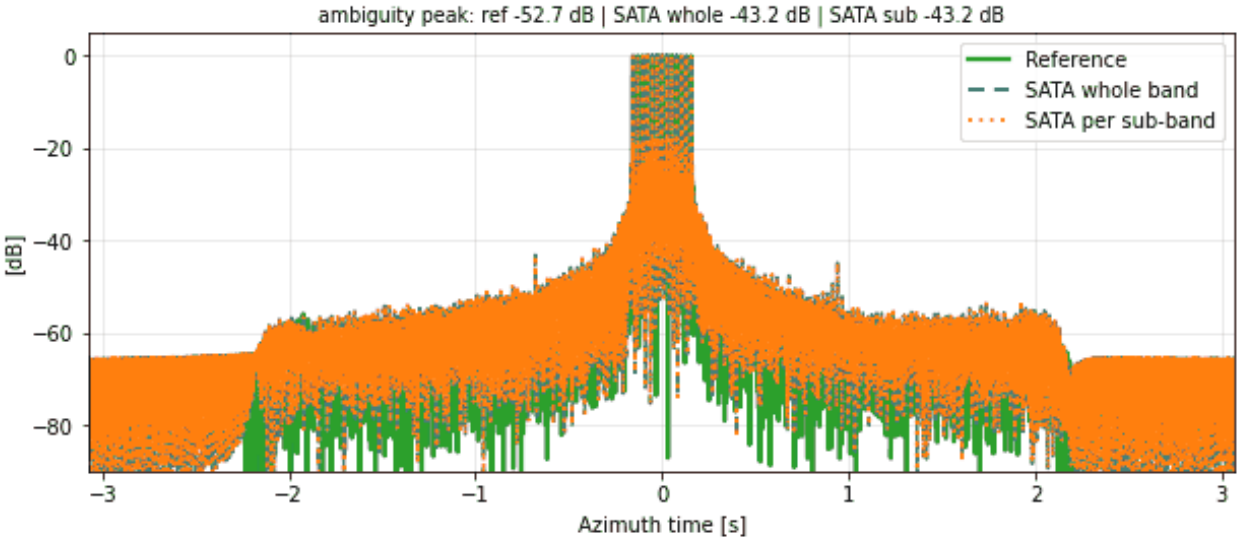


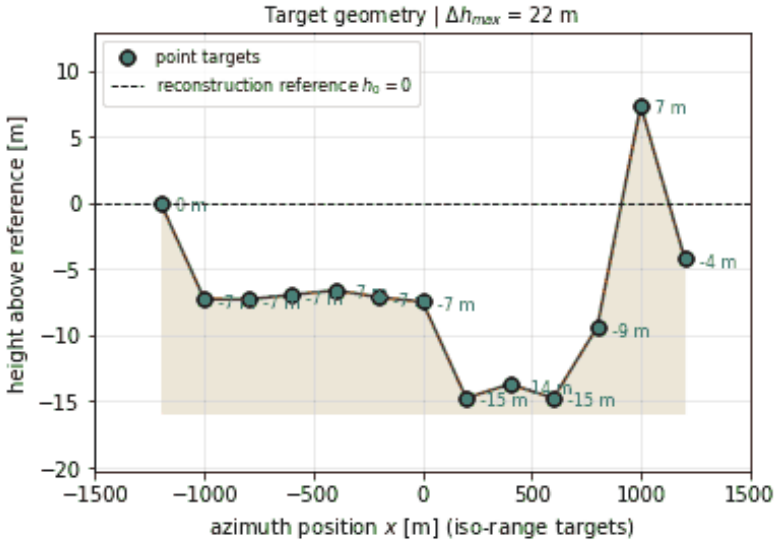


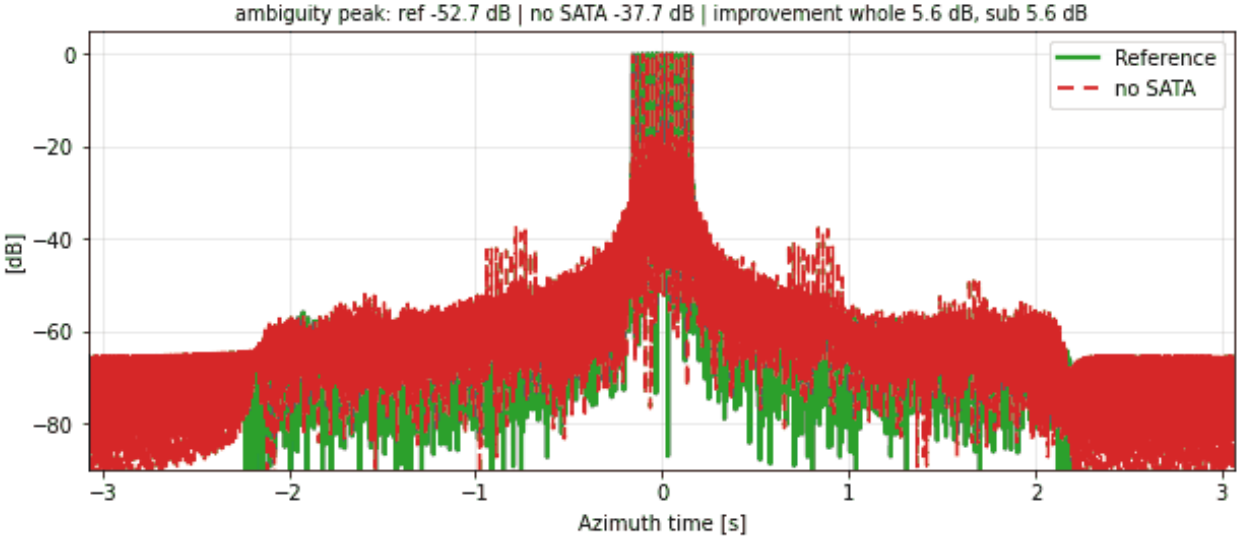


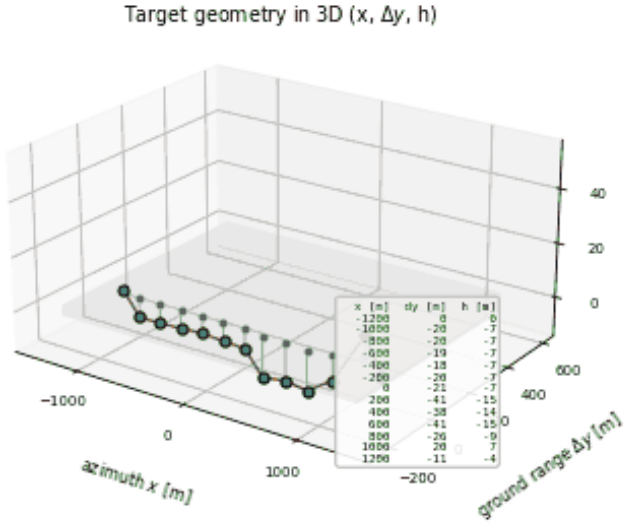


PW-SN-001 | SATA 1D | piecewise ramp: N = 5, random slopes over 200-m steps, seed 0, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

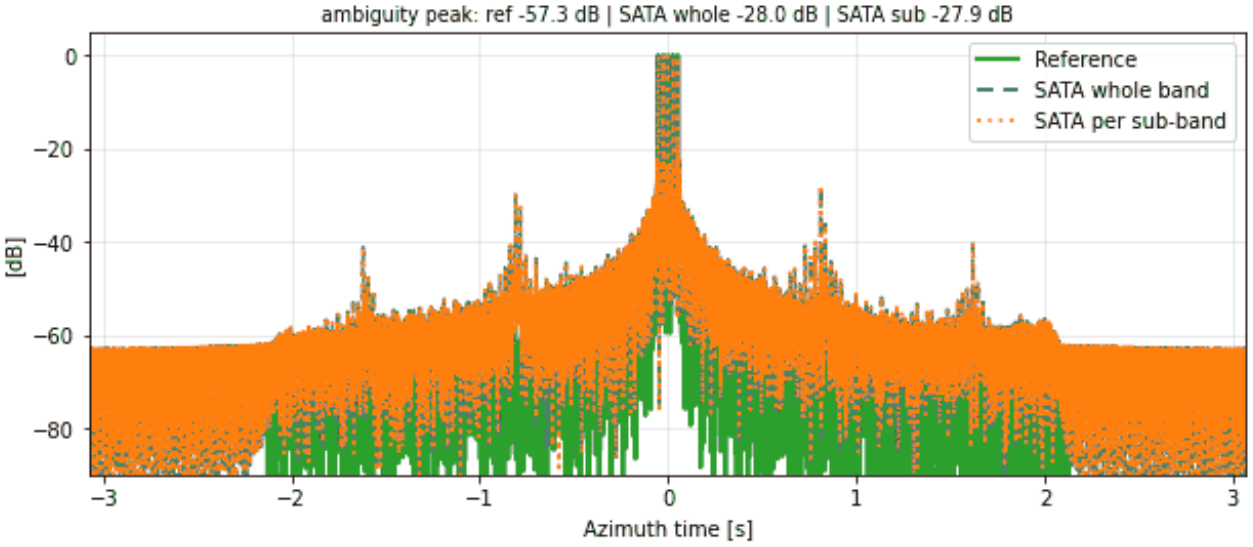


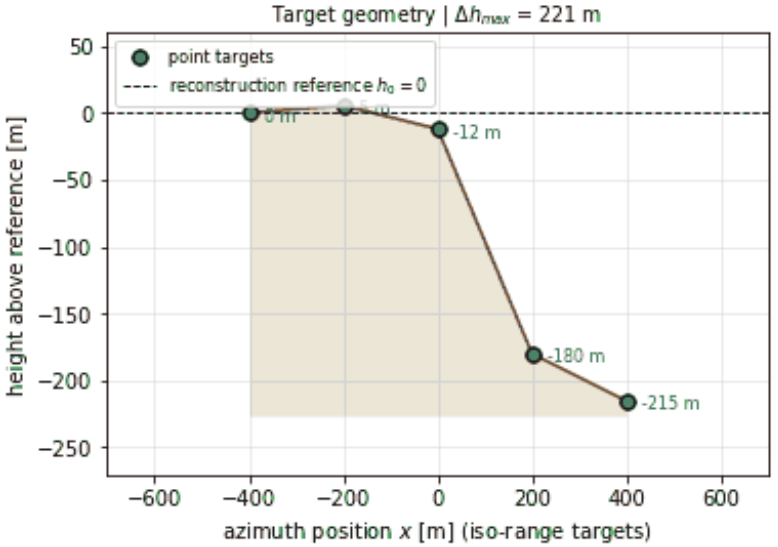


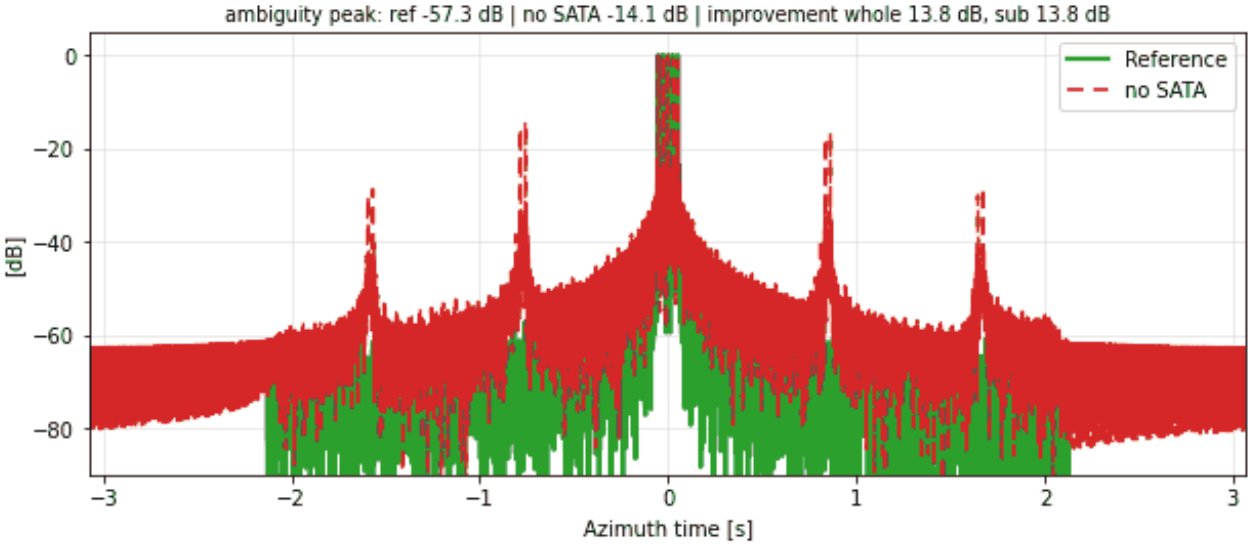


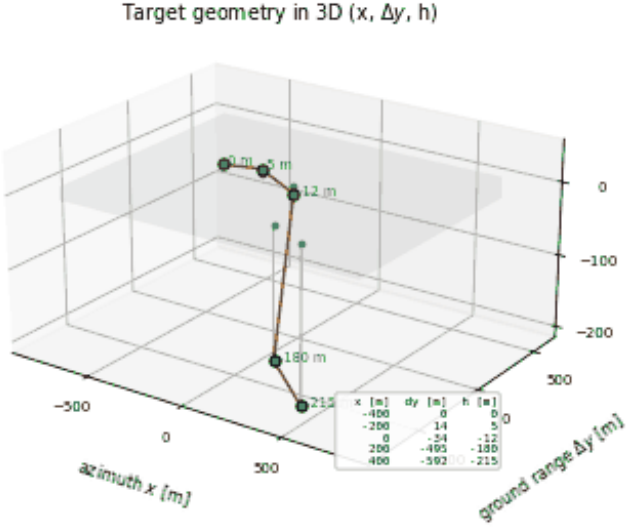


PW-SN-002 | SATA 1D | piecewise ramp: N = 5, random slopes over 200-m steps, seed 1, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

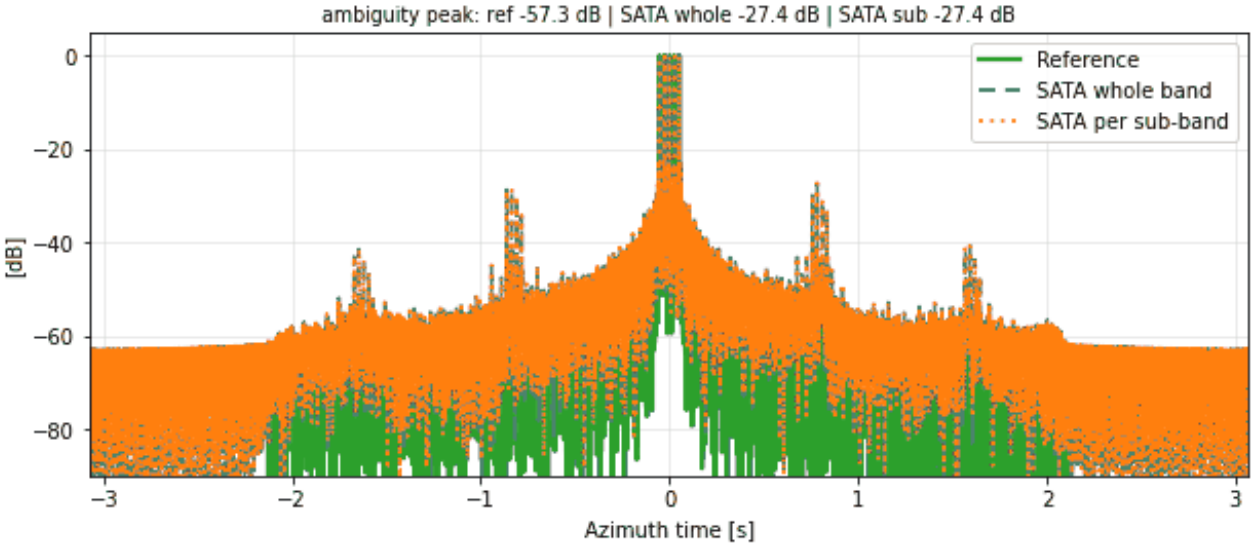


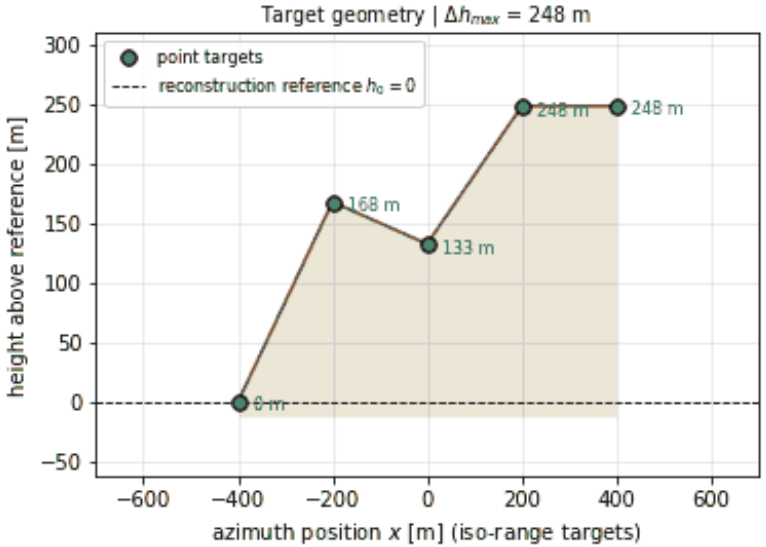


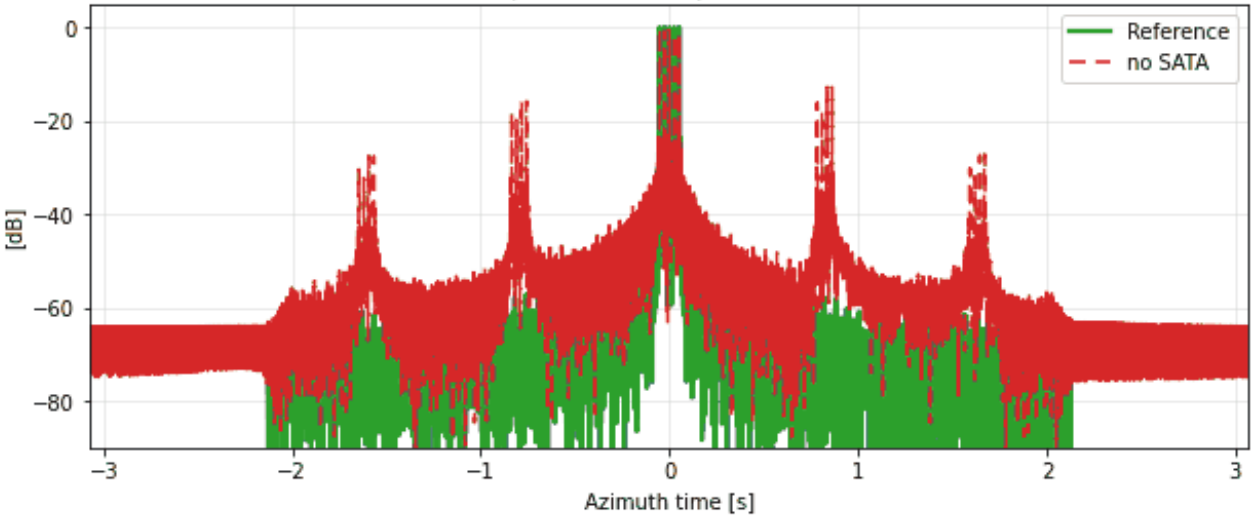


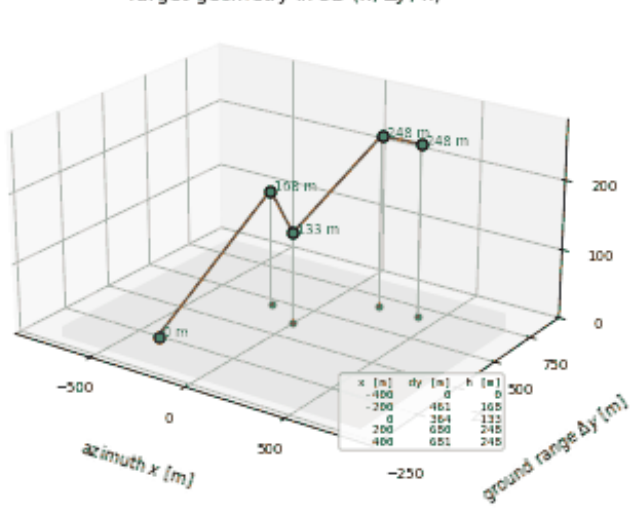


PW-SN-003 | SATA 1D | piecewise ramp: N = 5, random slopes over 200-m steps, seed 2, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

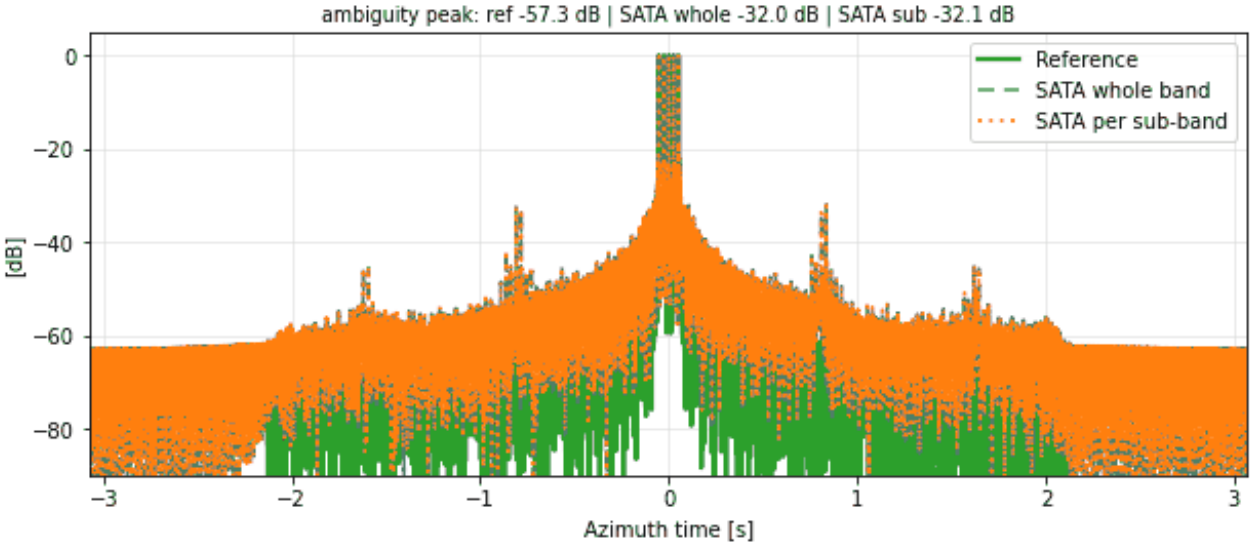


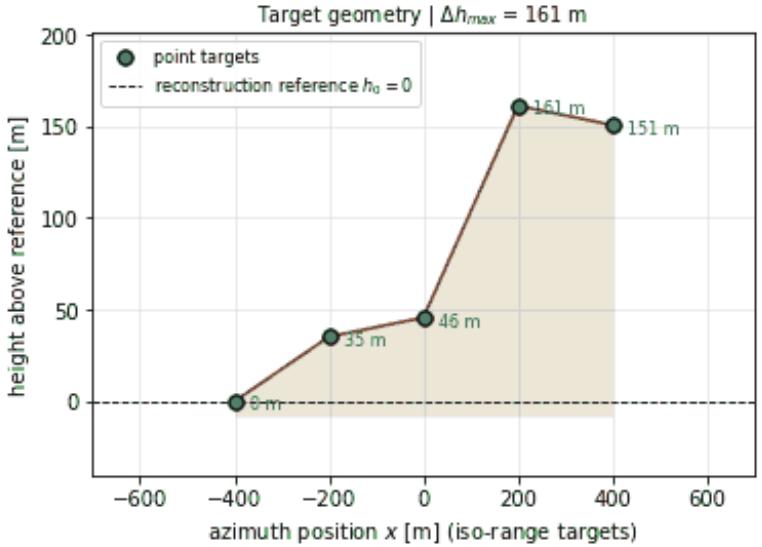


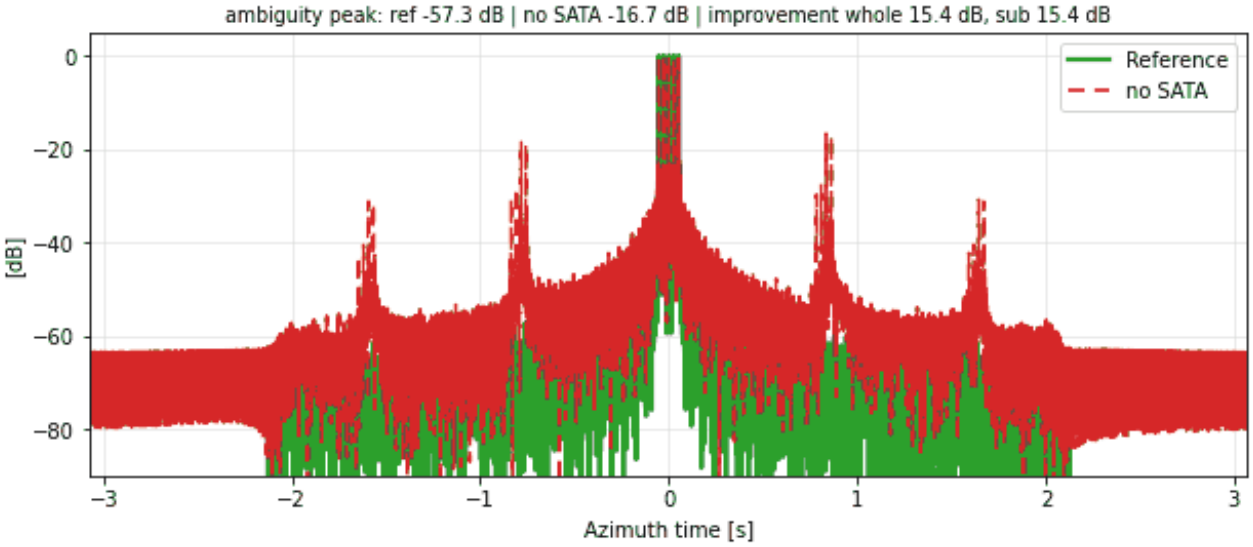

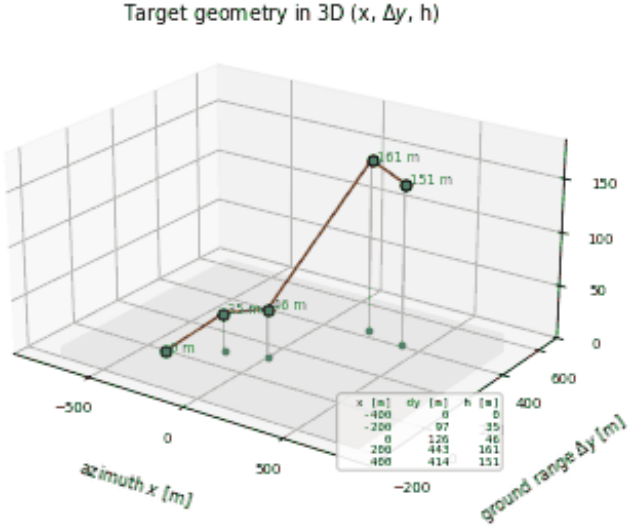


PW-SN-004 | SATA 1D | piecewise ramp: N = 5, random slopes over 200-m steps, seed 3, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

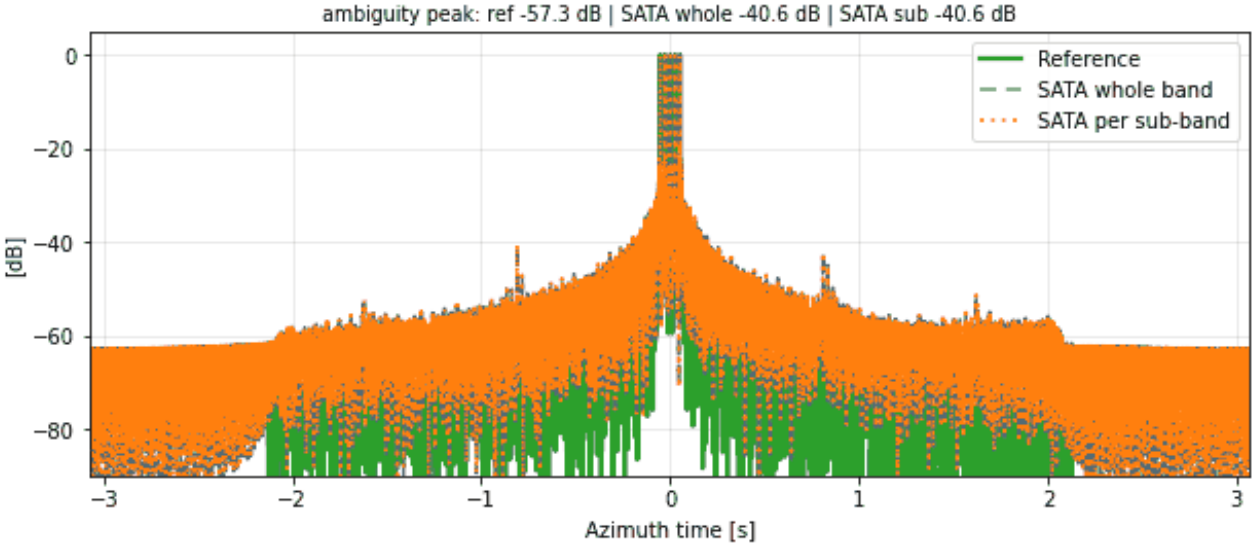


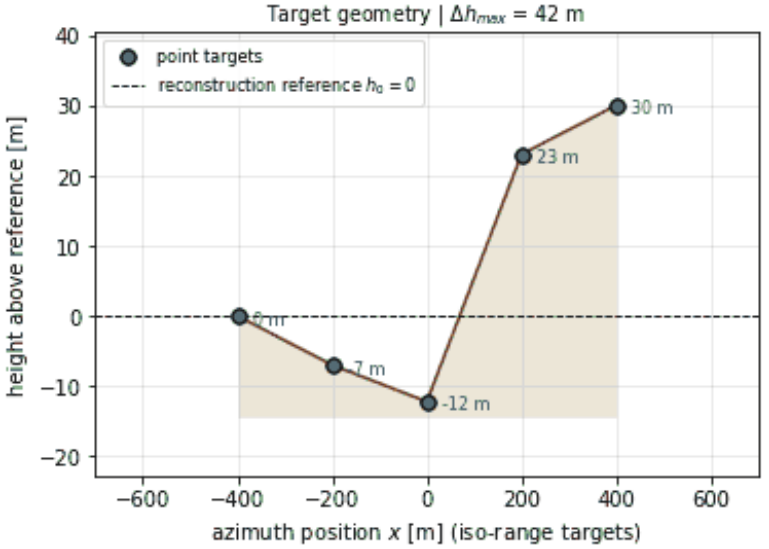





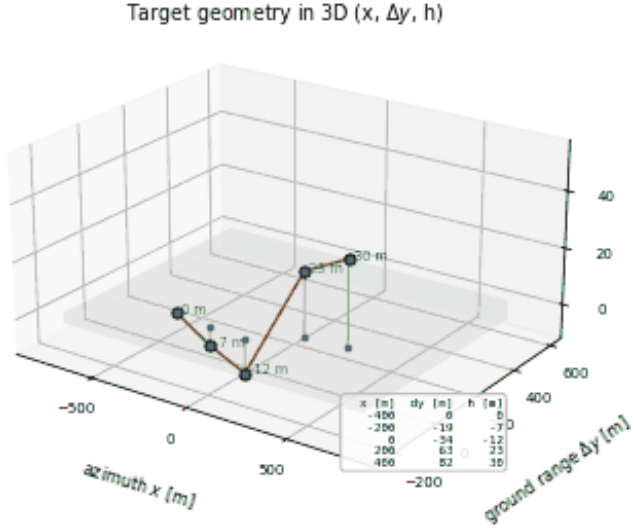


PW-SN-005 | SATA 1D | piecewise ramp: N = 5, random slopes over 200-m steps, seed 4, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

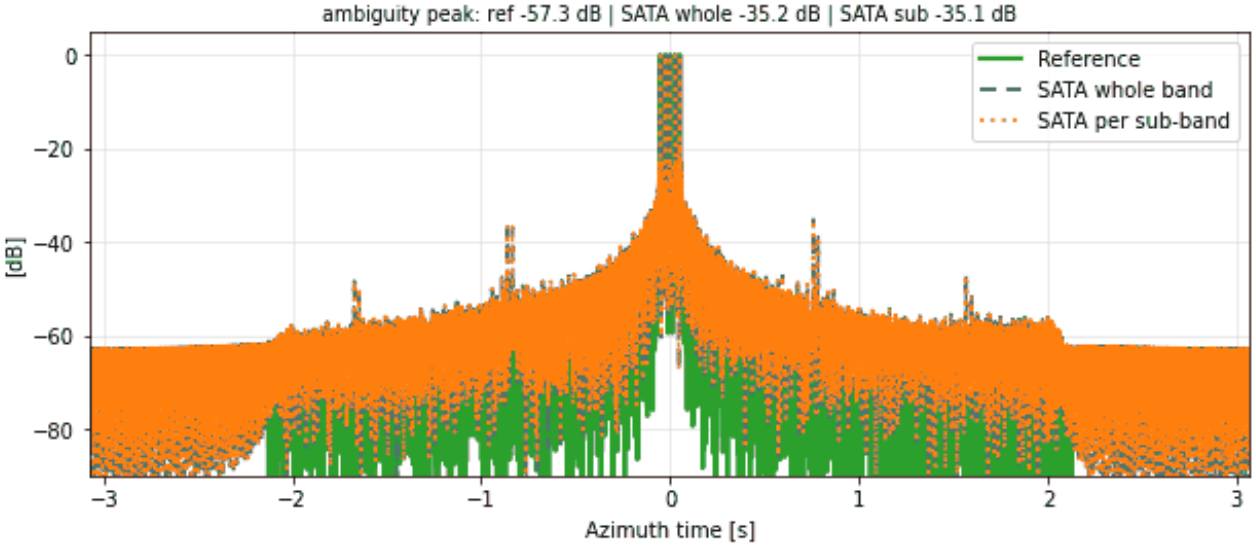


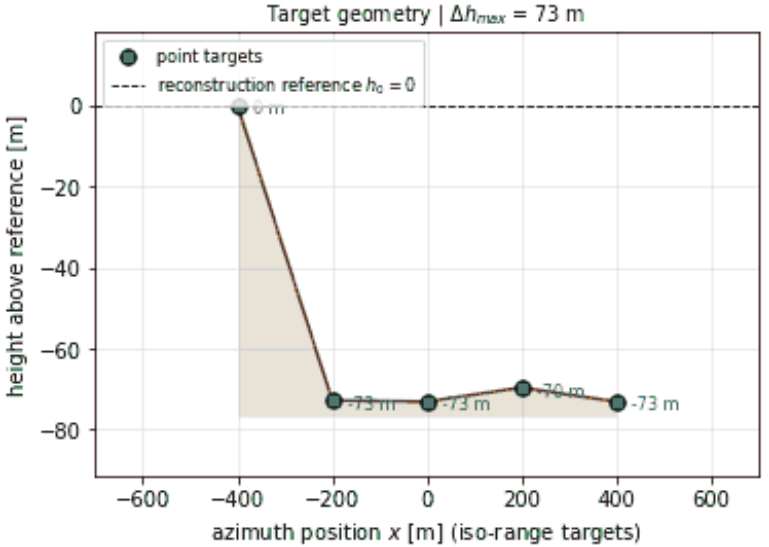


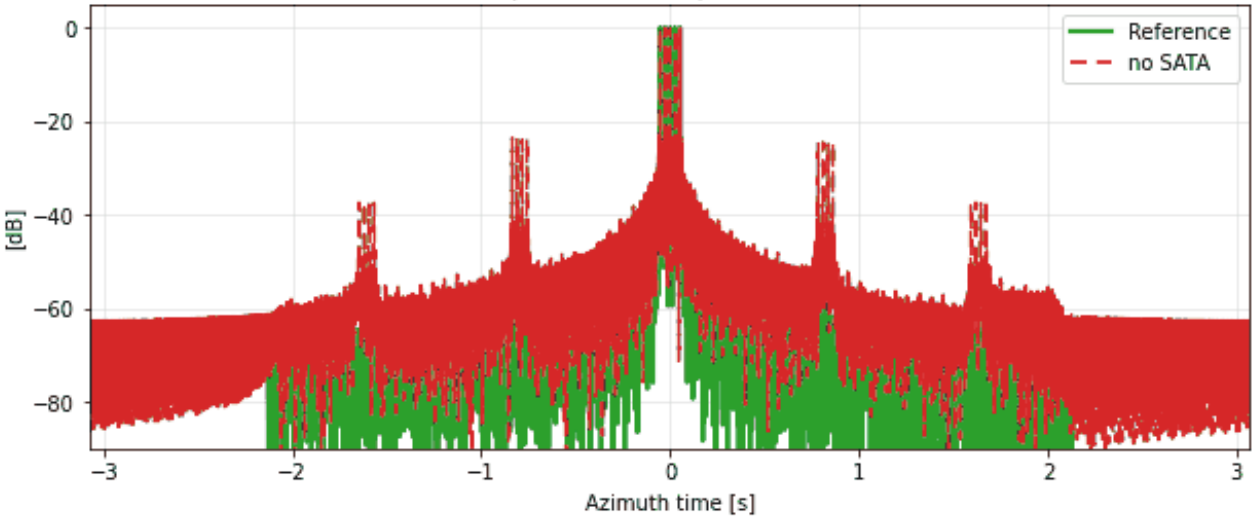


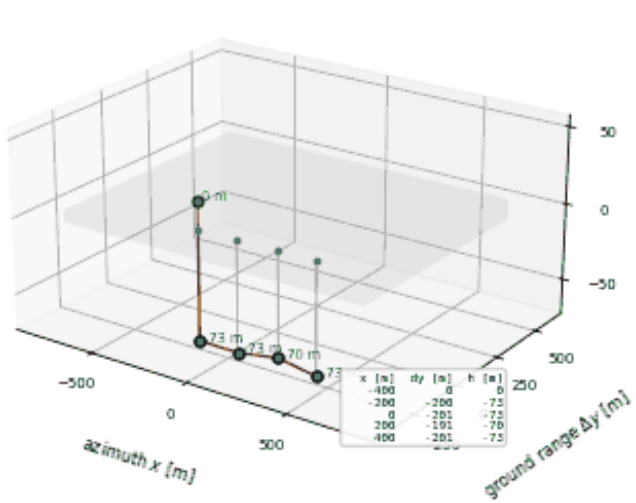


PW-SN-006 | SATA 1D | piecewise ramp: N = 9, random slopes over 200-m steps, seed 0, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

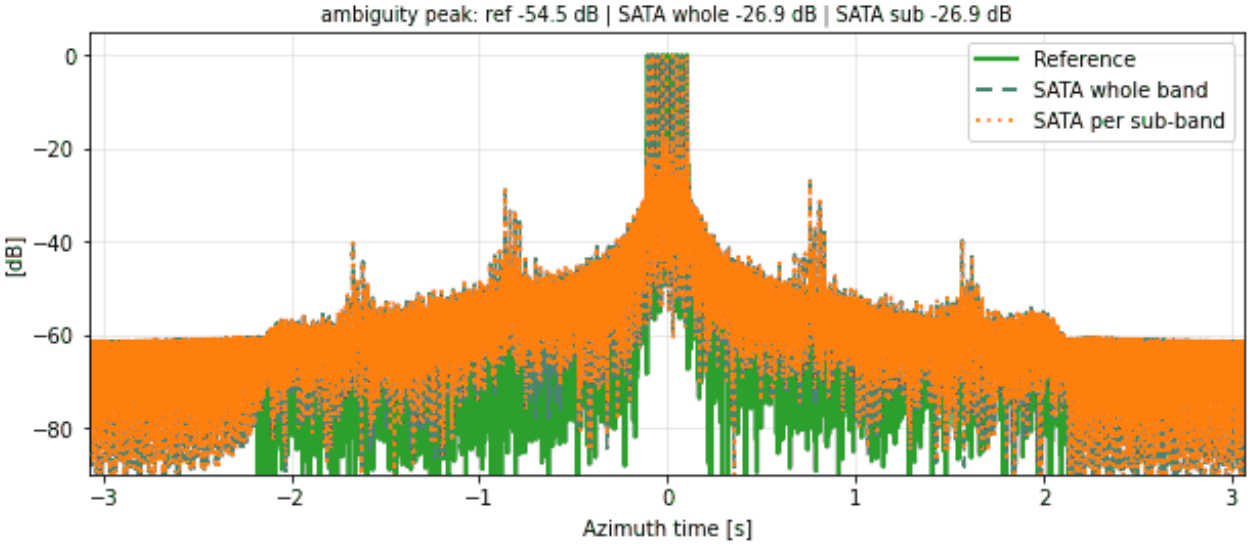


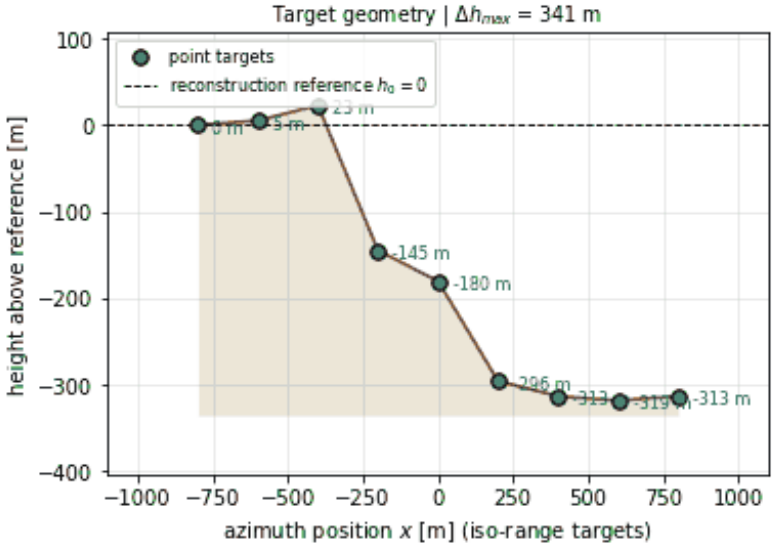


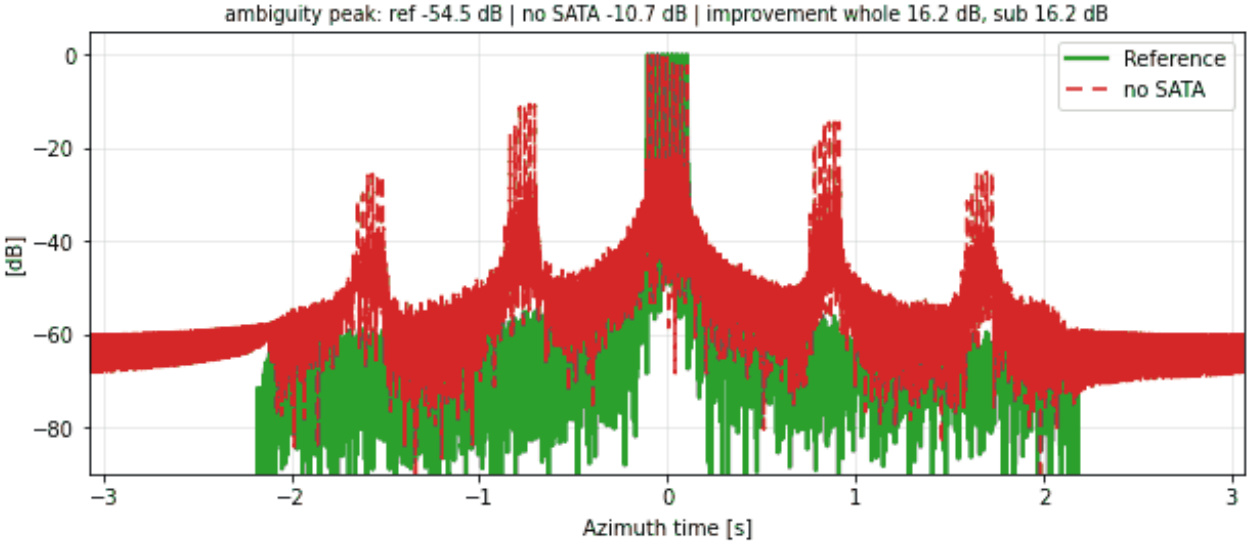


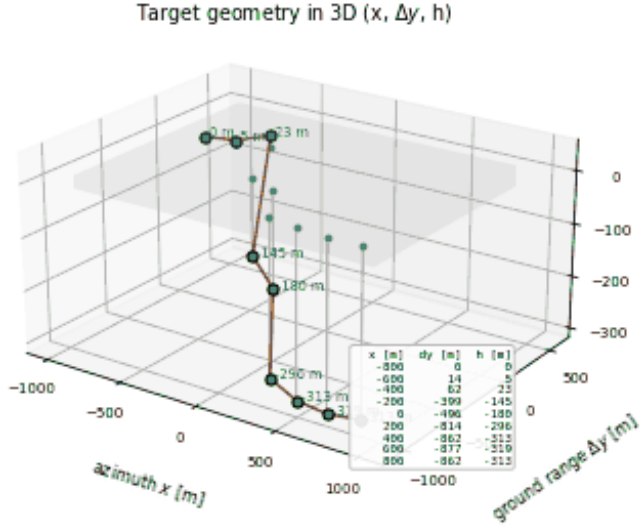


PW-SN-007 | SATA 1D | piecewise ramp: N = 9, random slopes over 200-m steps, seed 1, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

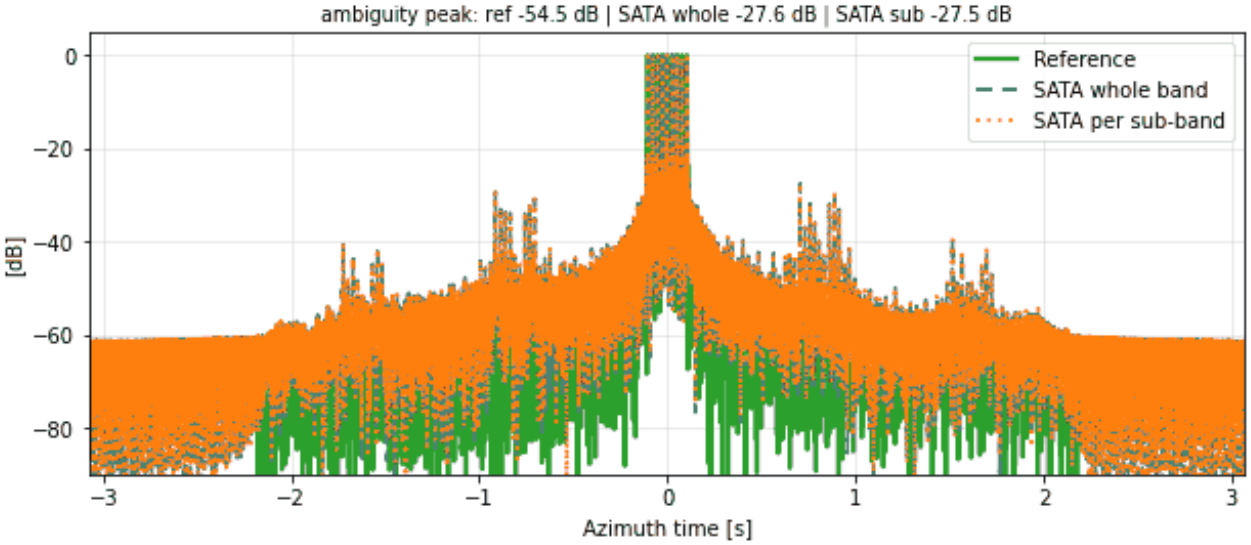


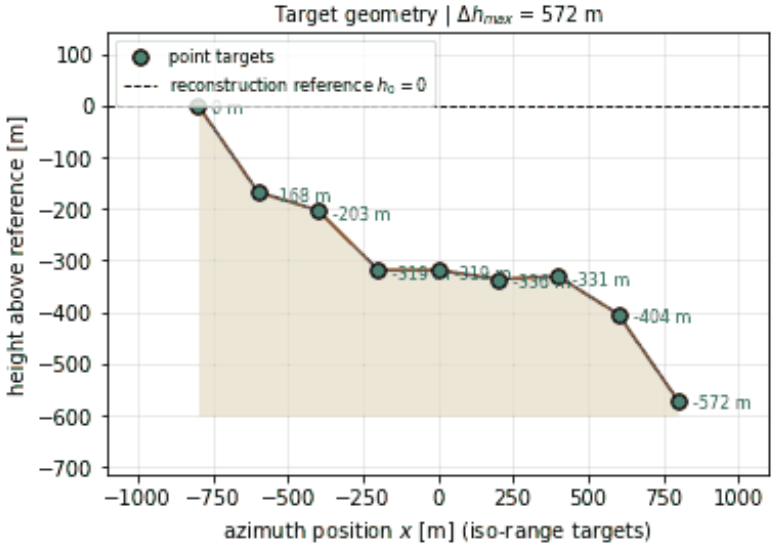


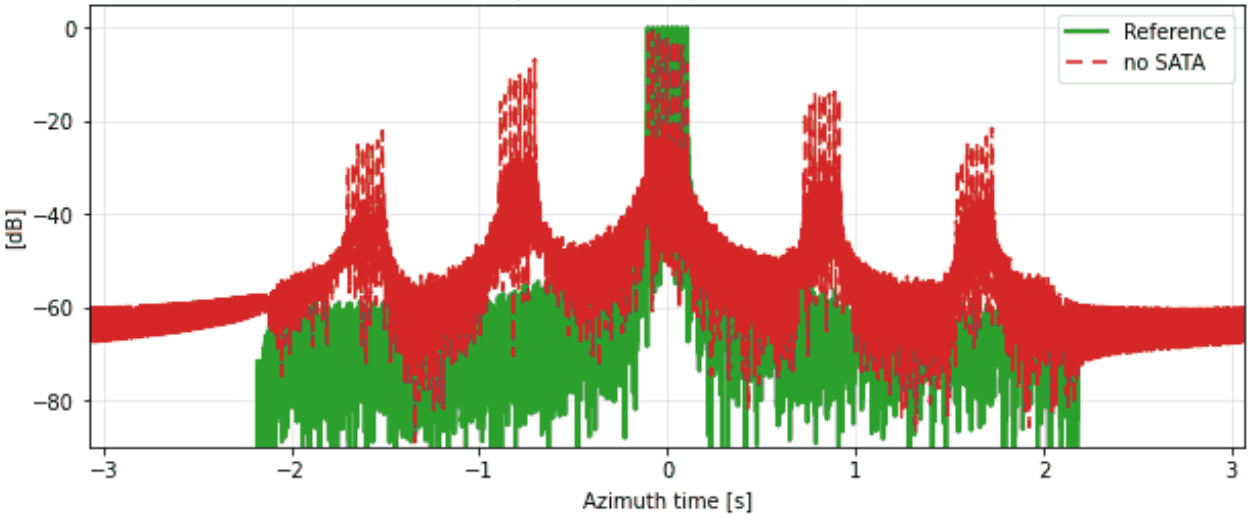


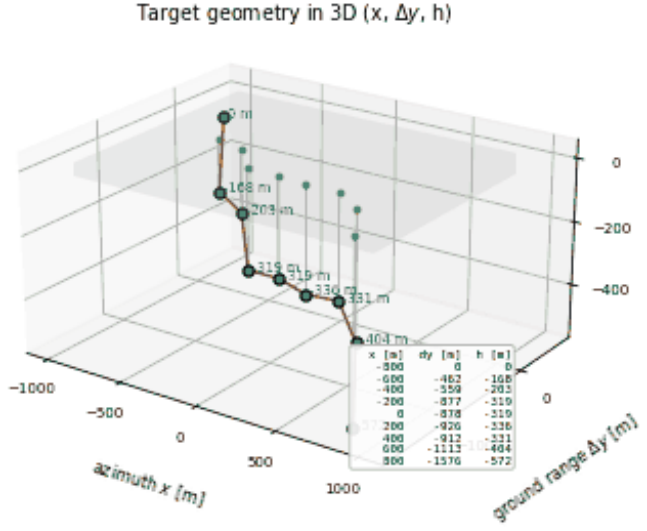


PW-SN-008 | SATA 1D | piecewise ramp: N = 9, random slopes over 200-m steps, seed 2, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

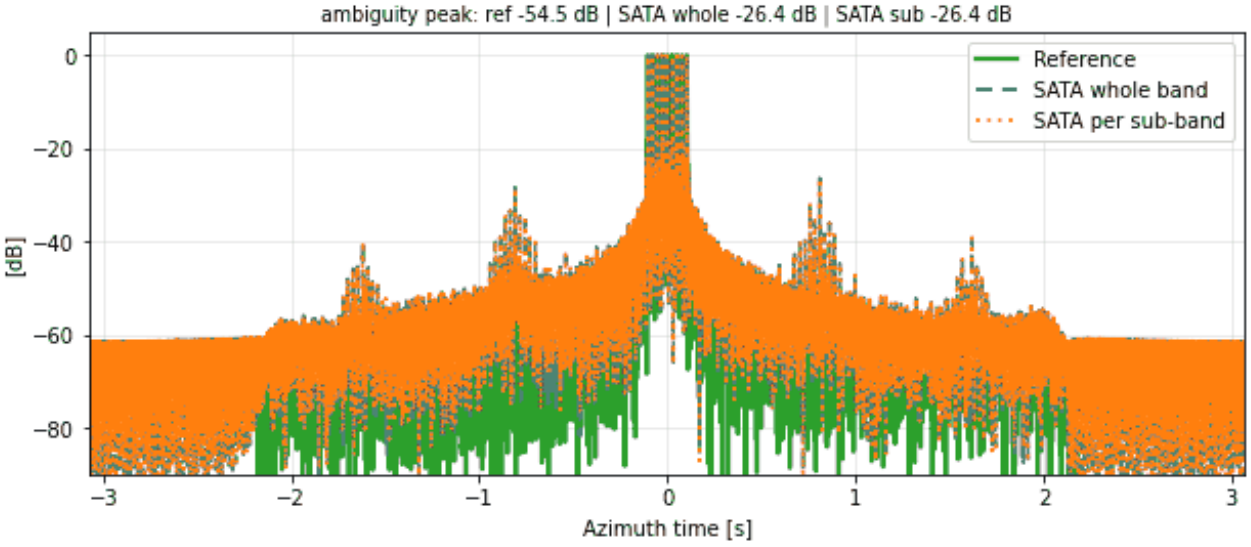


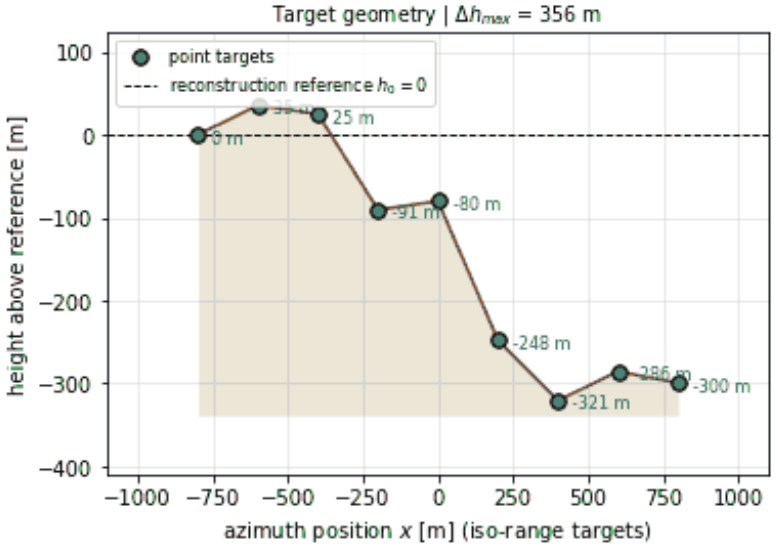


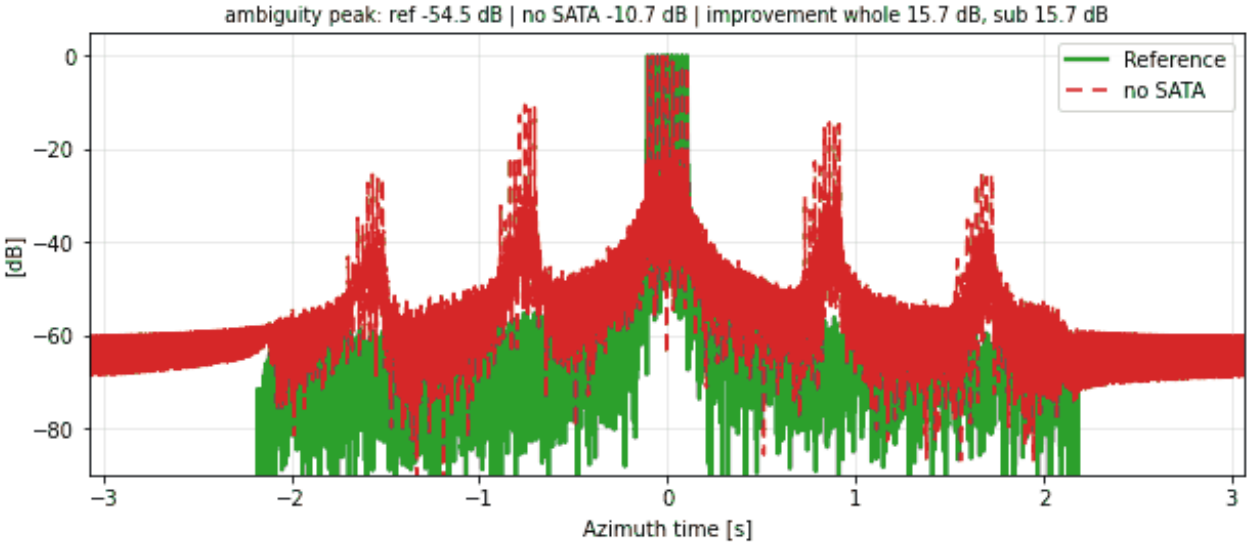


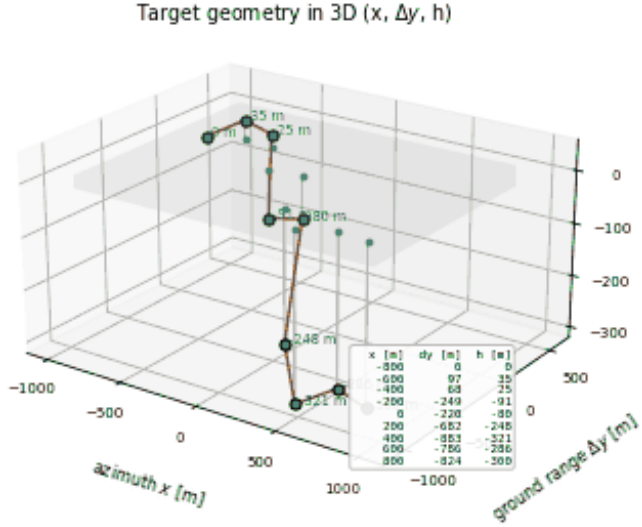


PW-SN-009 | SATA 1D | piecewise ramp: N = 9, random slopes over 200-m steps, seed 3, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

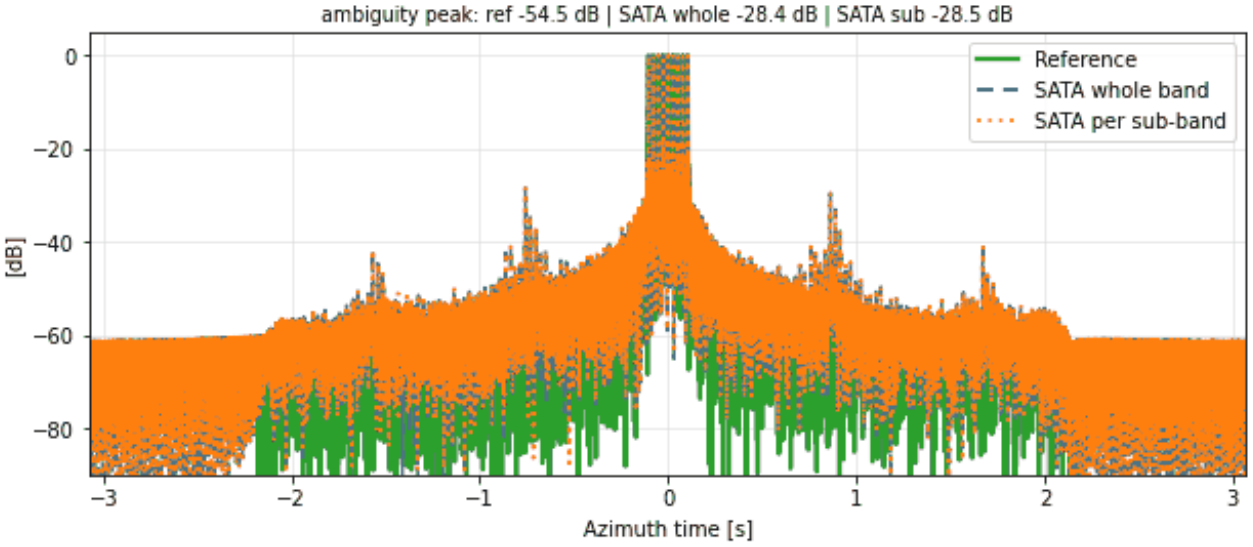


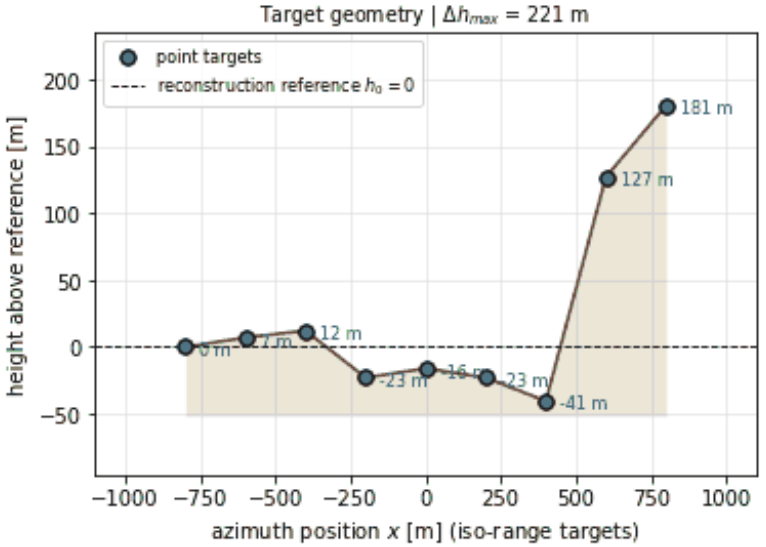


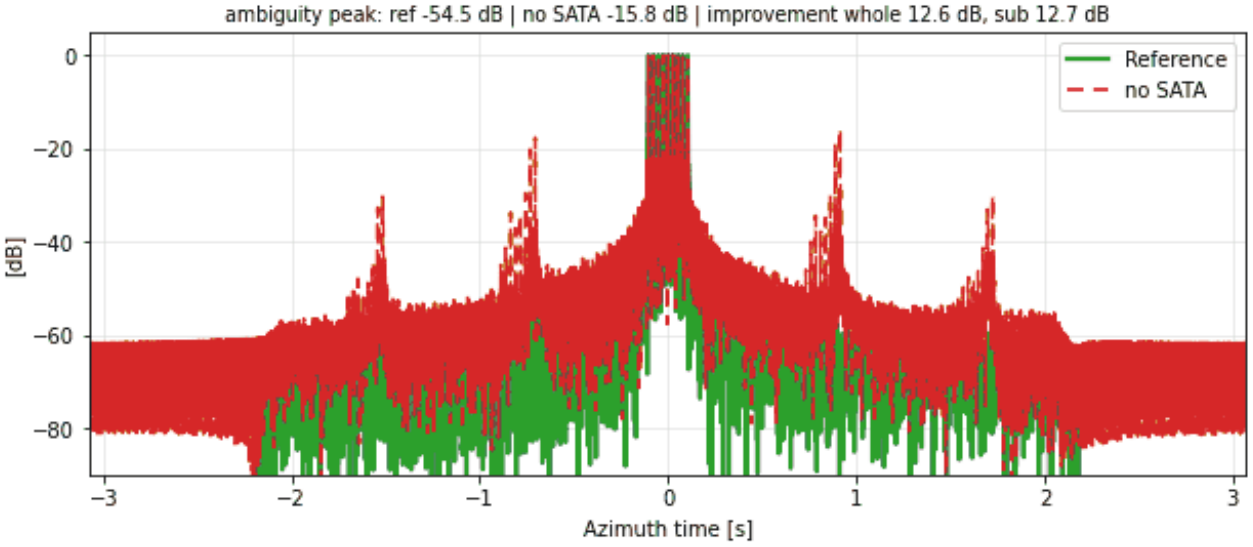


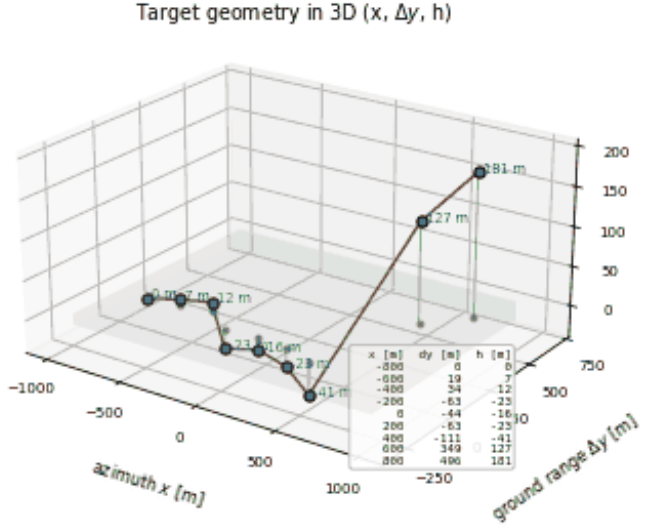


PW-SN-010 | SATA 1D | piecewise ramp: N = 9, random slopes over 200-m steps, seed 4, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

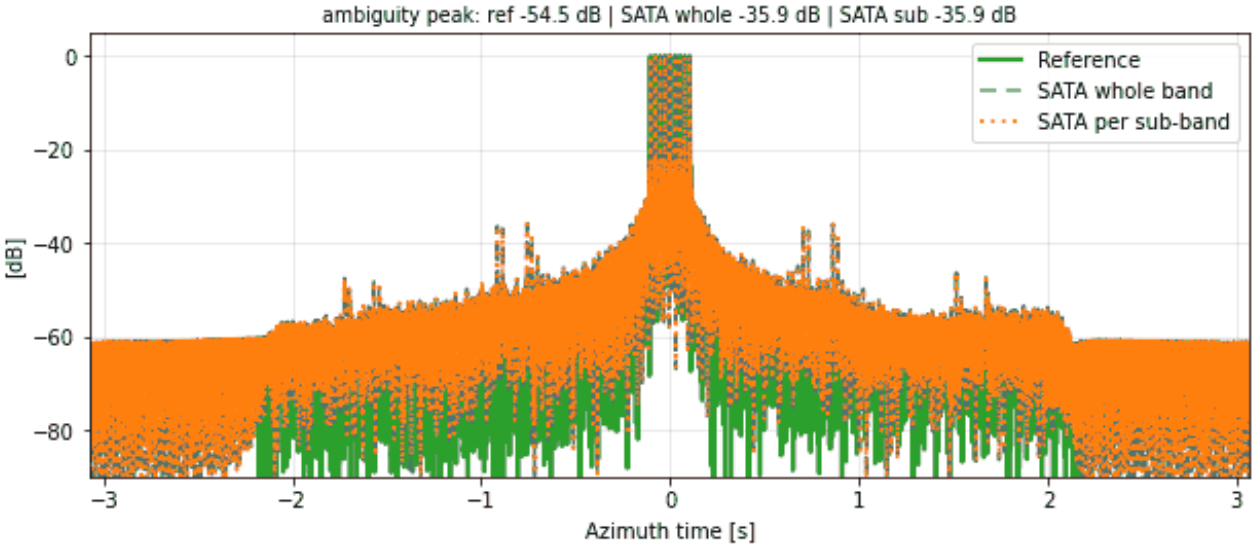


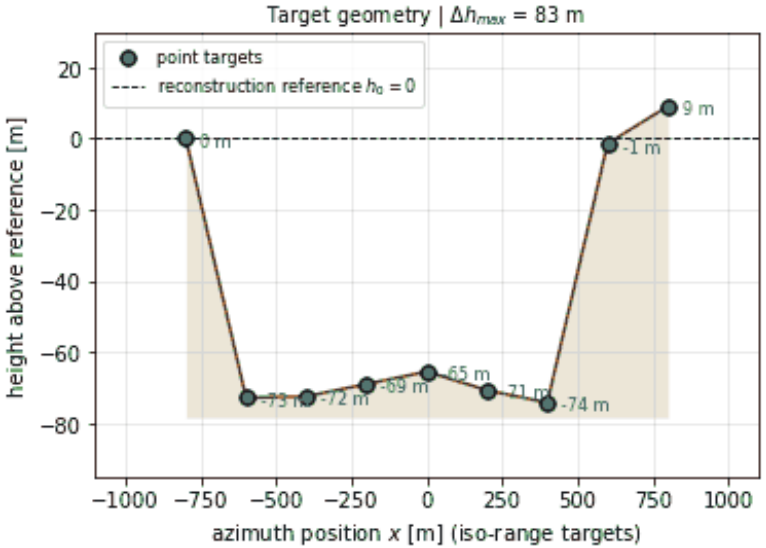


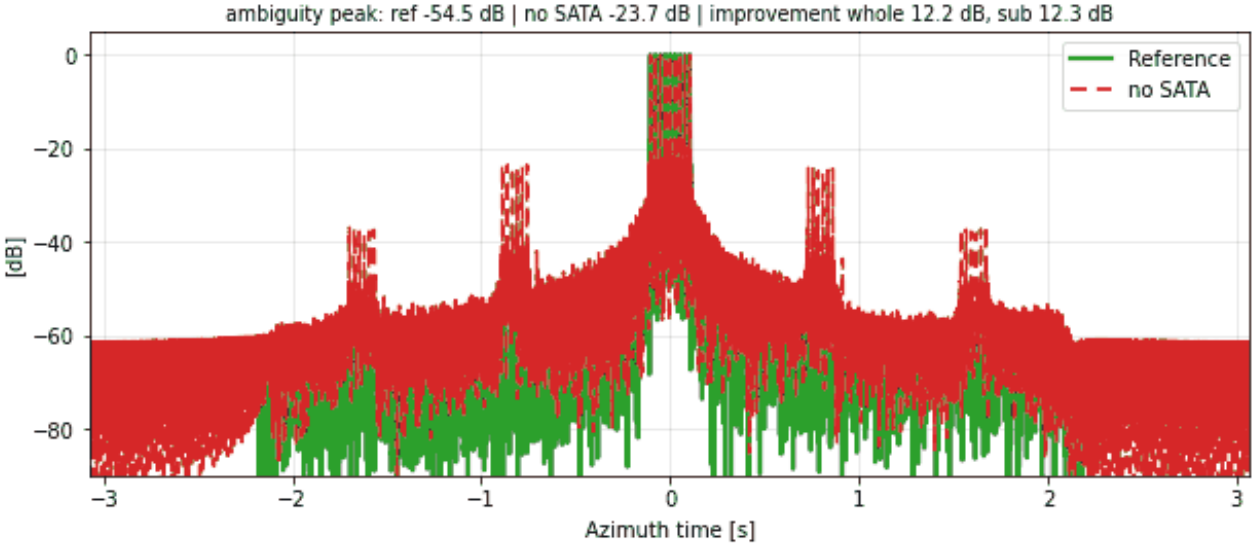


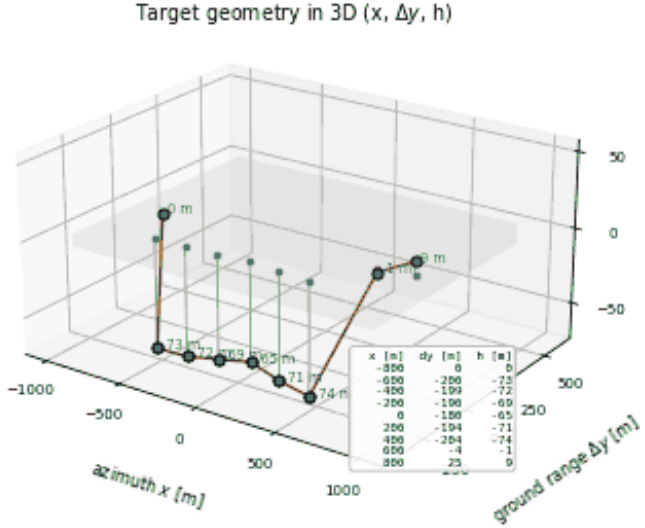


PW-SN-011 | SATA 1D | piecewise ramp: N = 13, random slopes over 200-m steps, seed 0, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

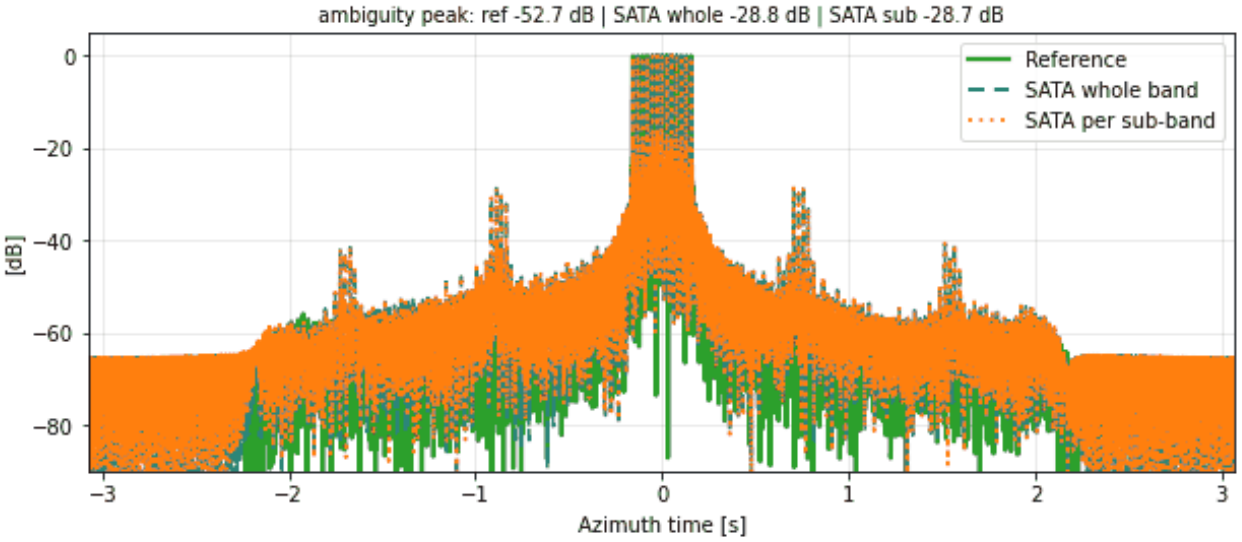


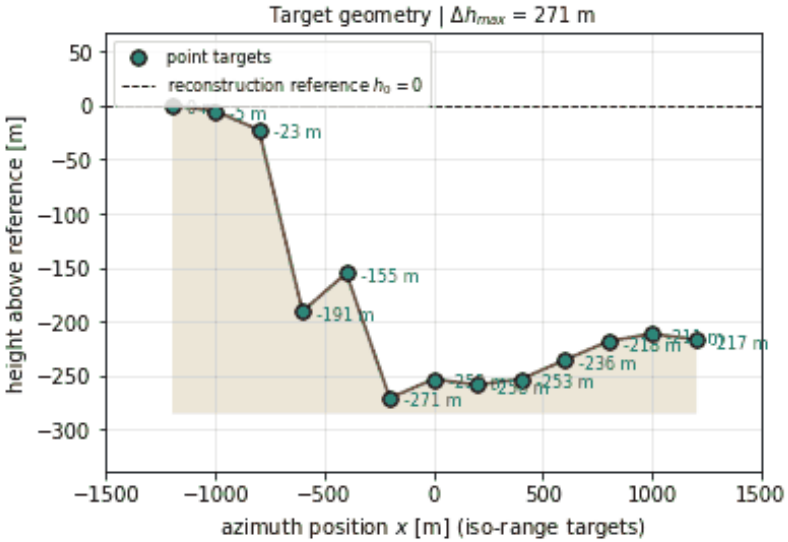


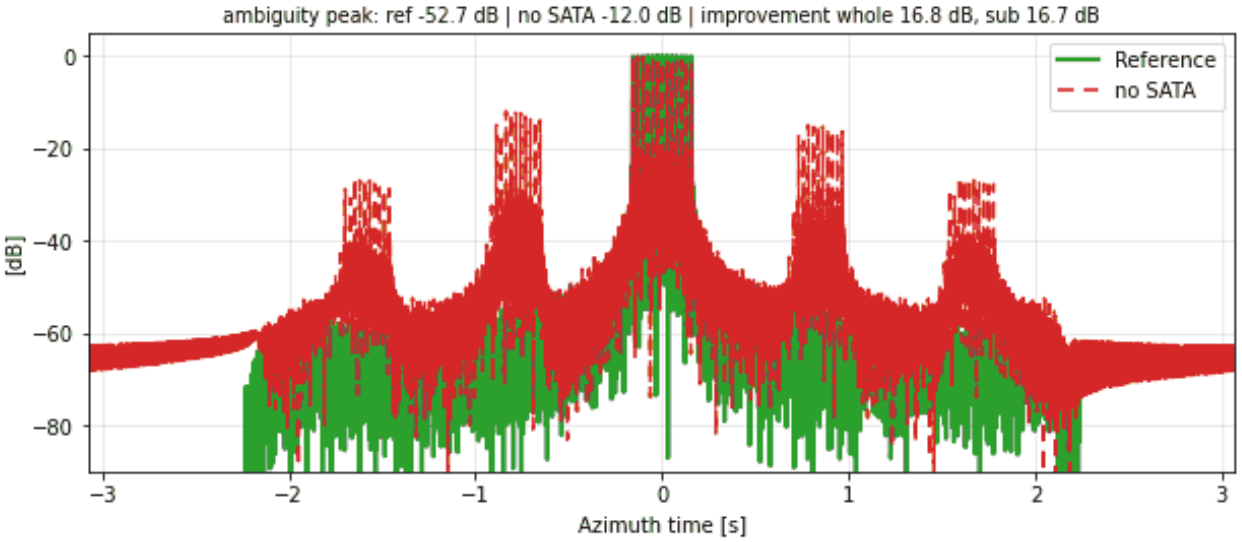


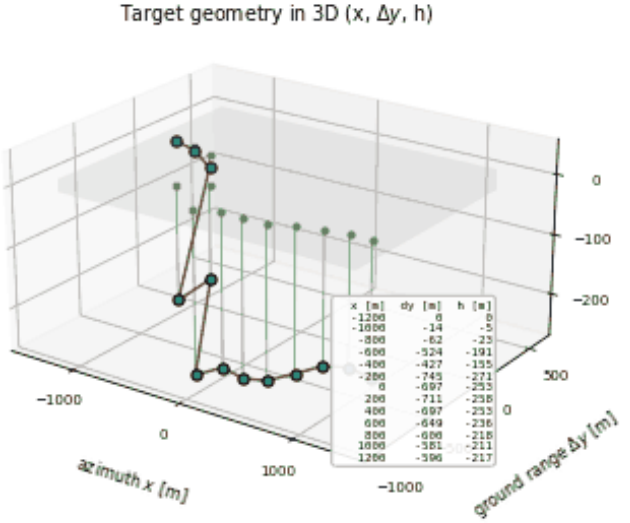


PW-SN-012 | SATA 1D | piecewise ramp: N = 13, random slopes over 200-m steps, seed 1, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

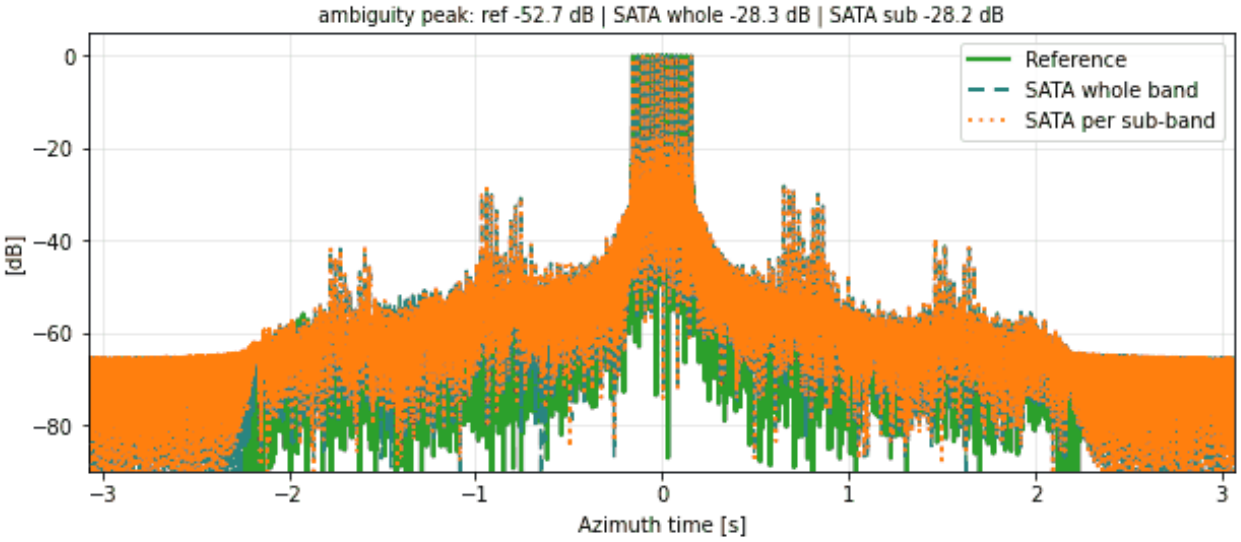


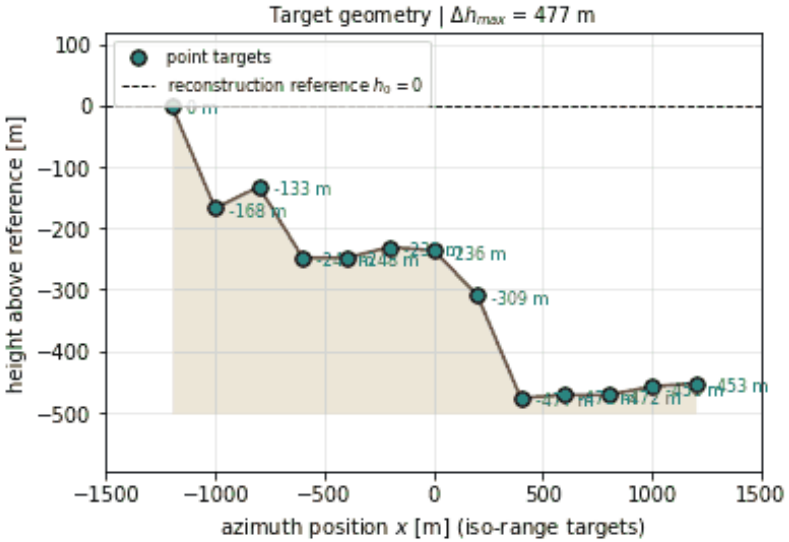


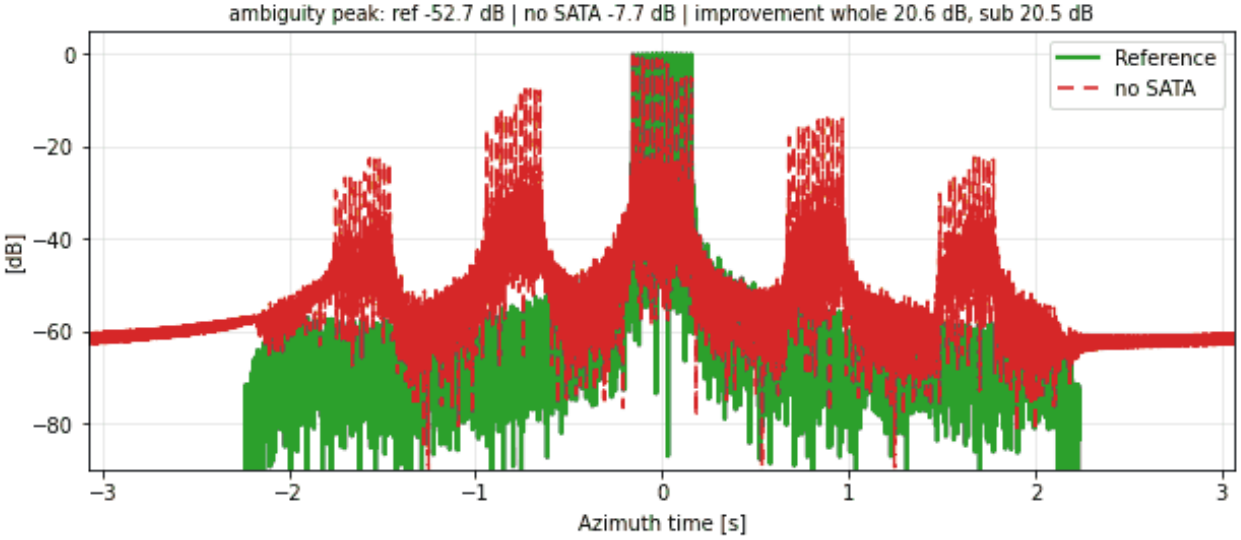


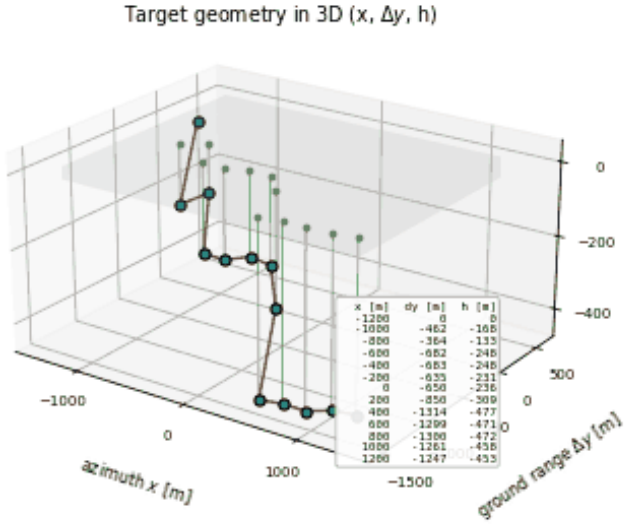


PW-SN-013 | SATA 1D | piecewise ramp: N = 13, random slopes over 200-m steps, seed 2, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

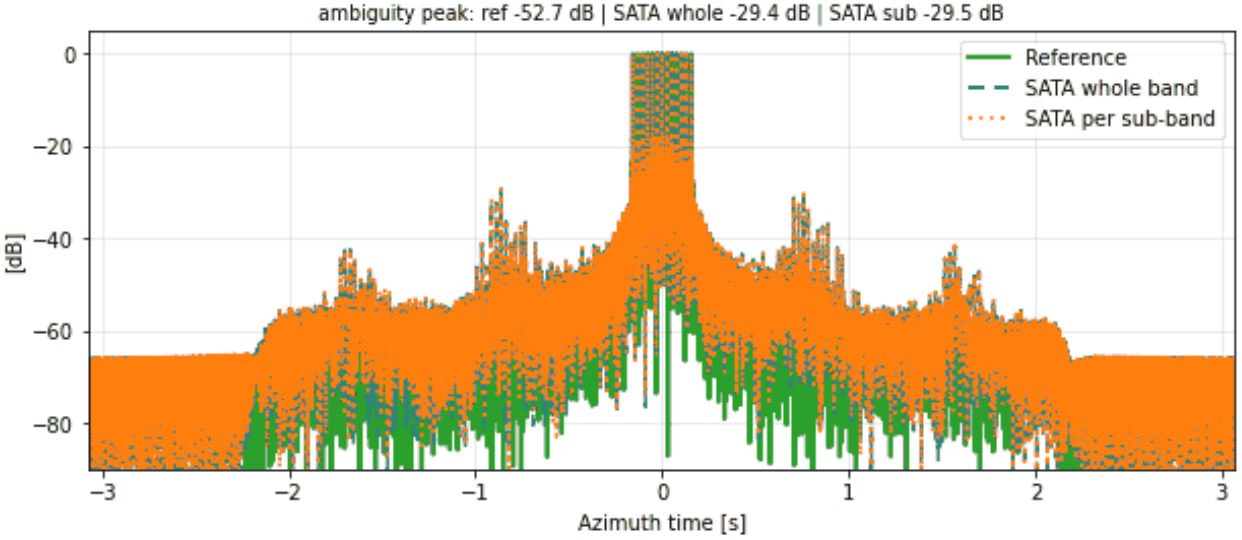


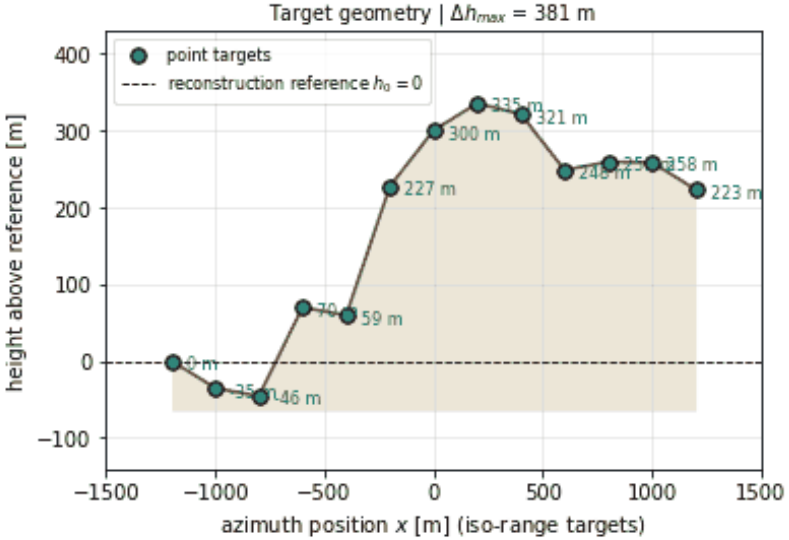


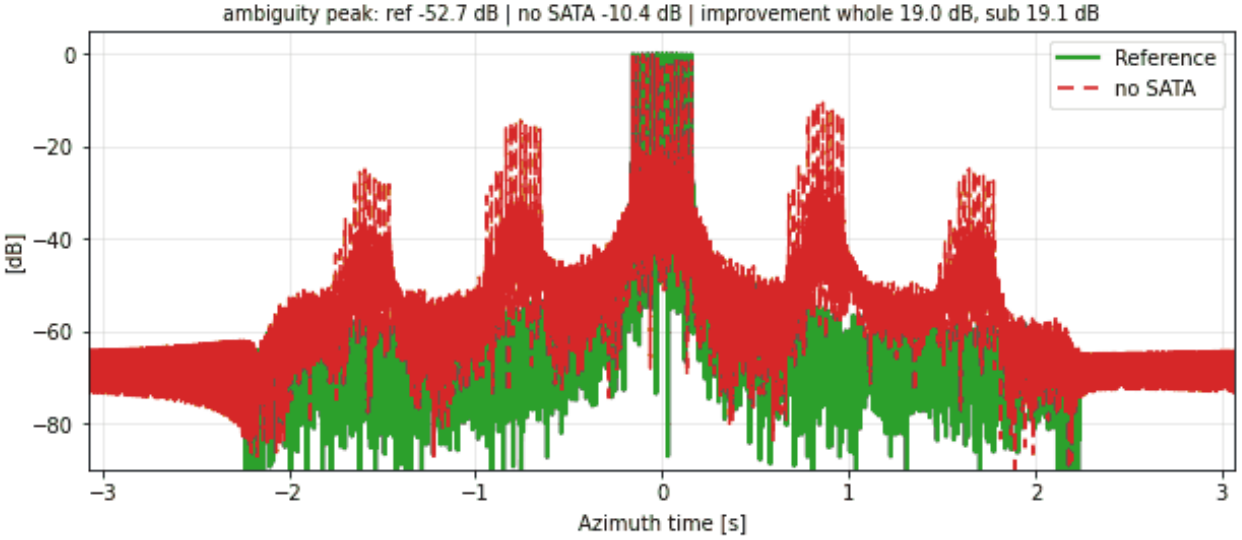


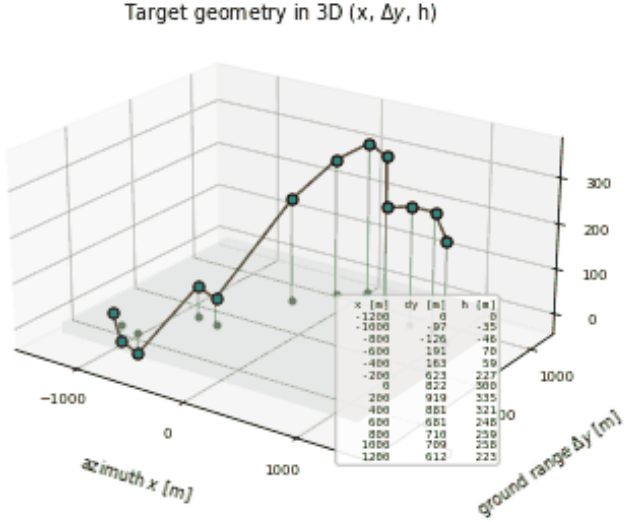


PW-SN-014 | SATA 1D | piecewise ramp: N = 13, random slopes over 200-m steps, seed 3, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

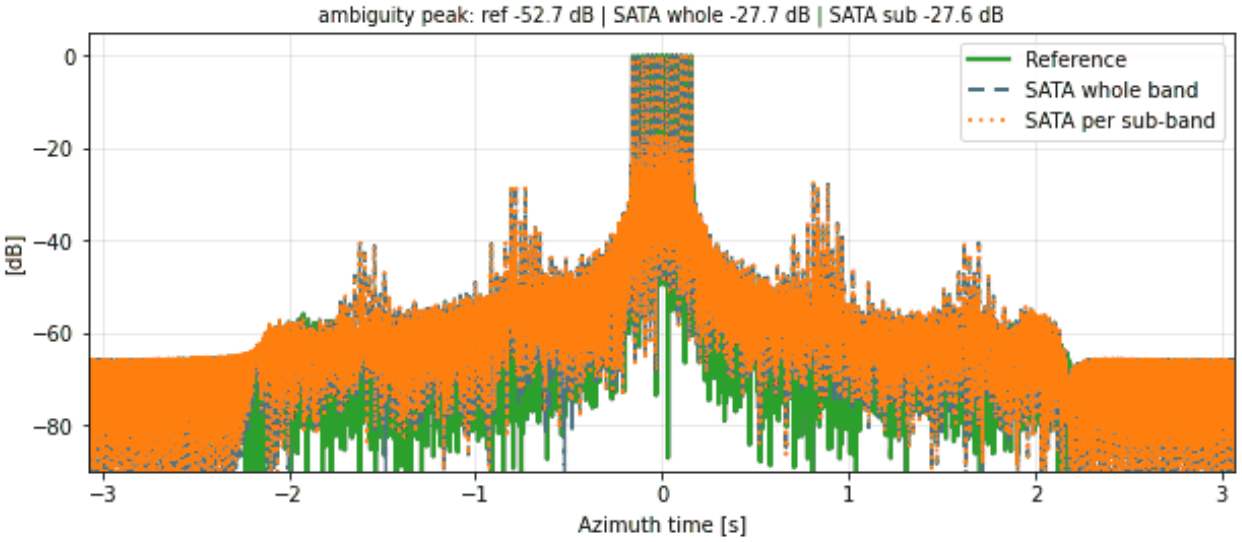


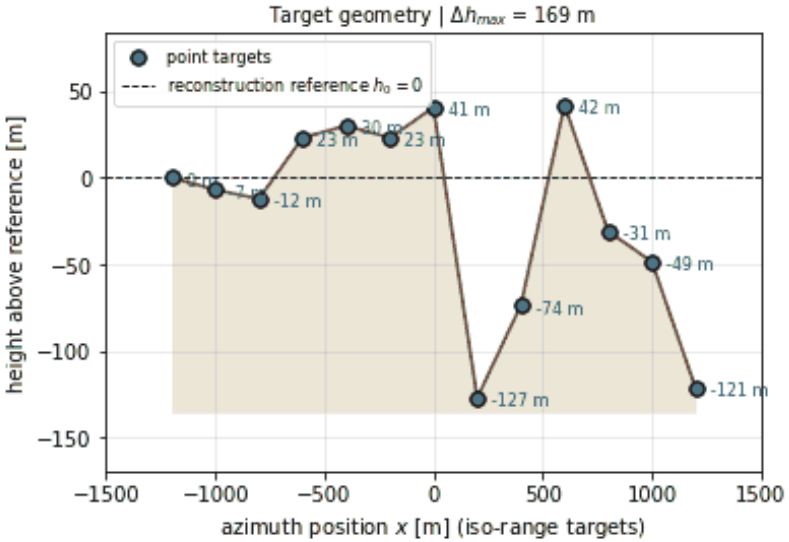


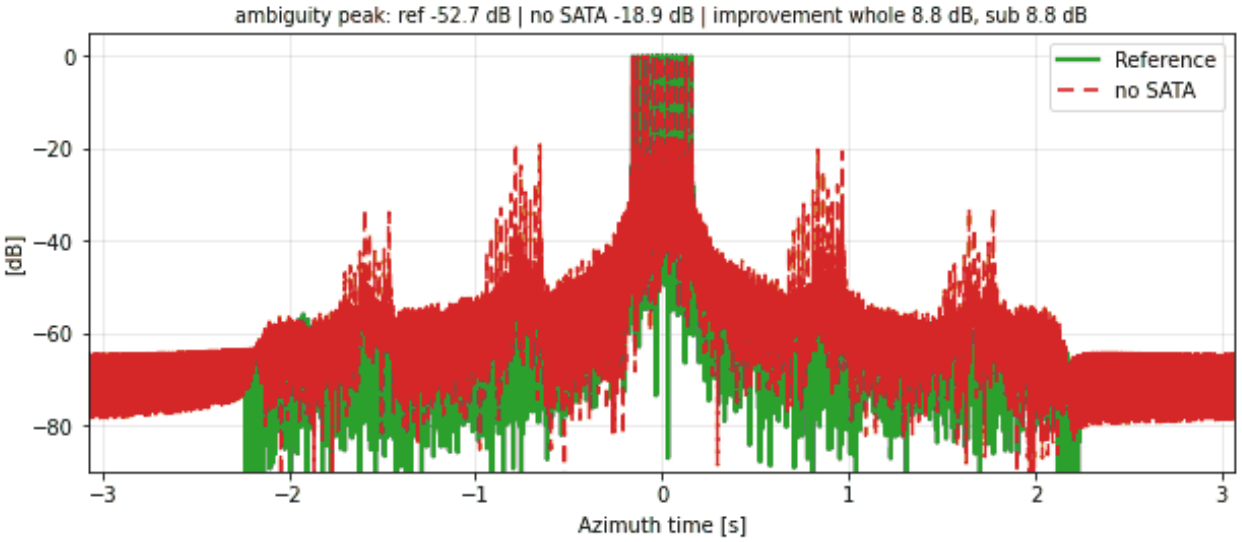


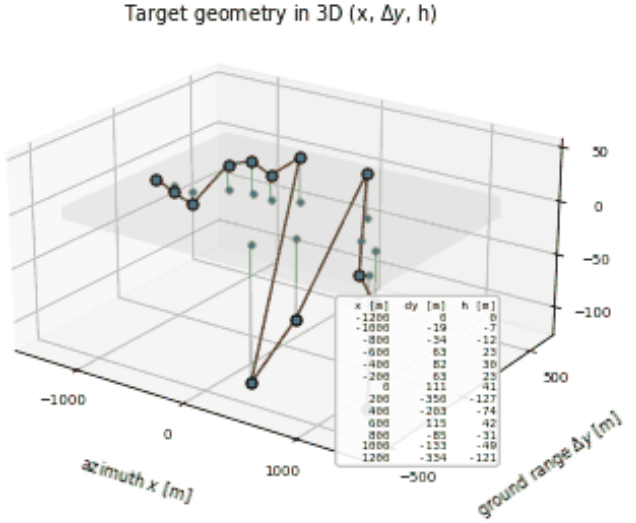


PW-SN-015 | SATA 1D | piecewise ramp: N = 13, random slopes over 200-m steps, seed 4, targets 200 m apart (small distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

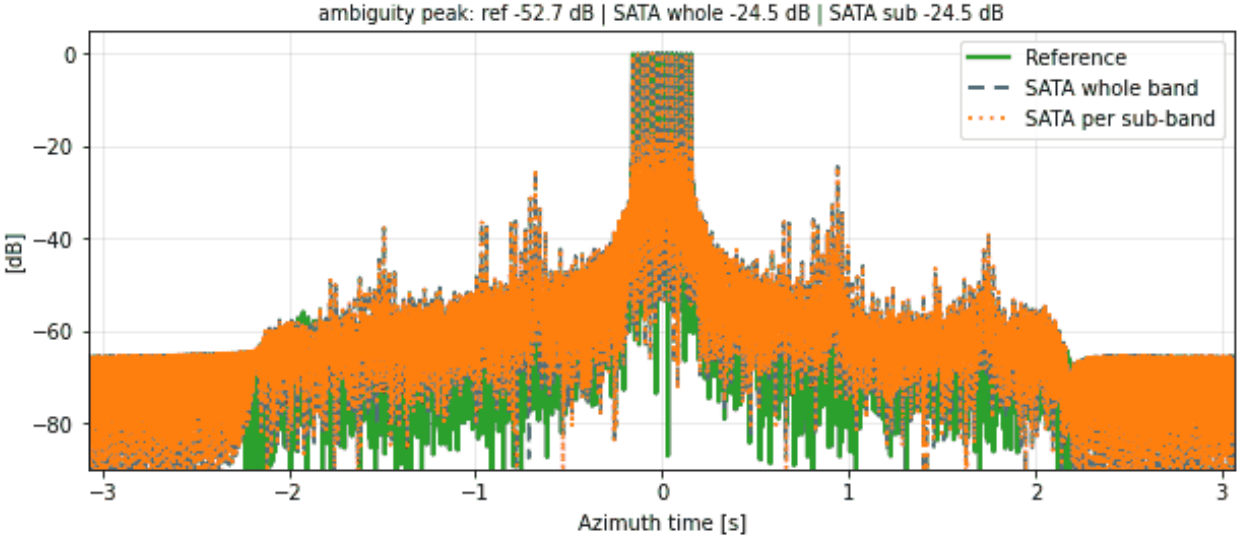


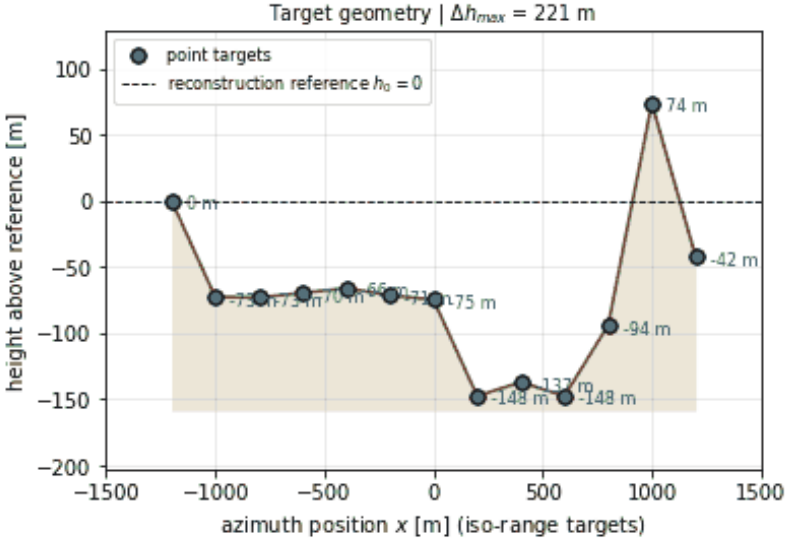


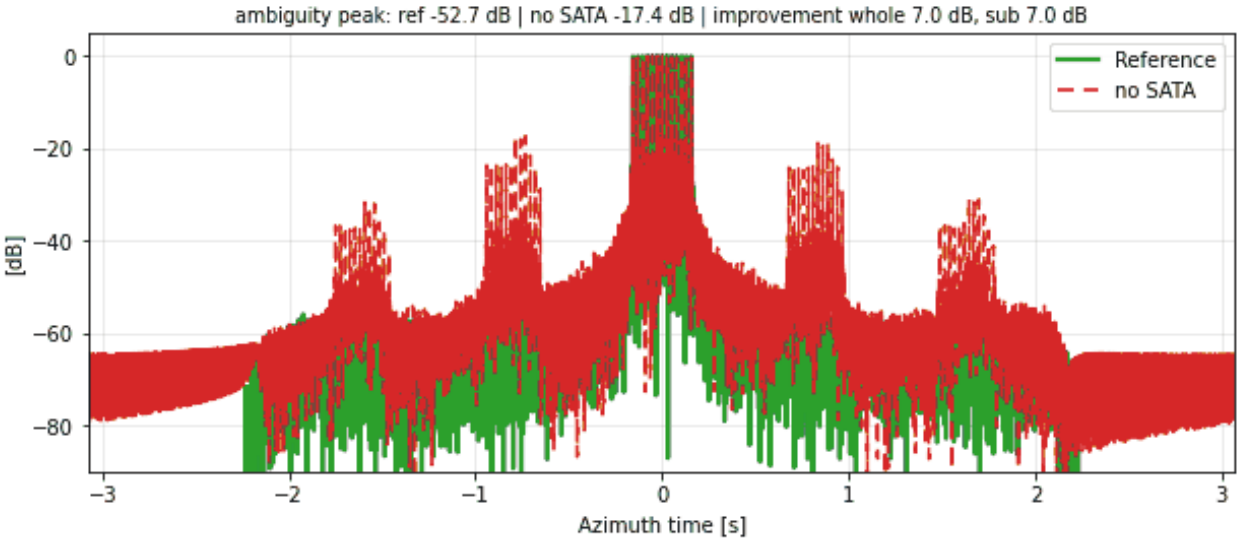


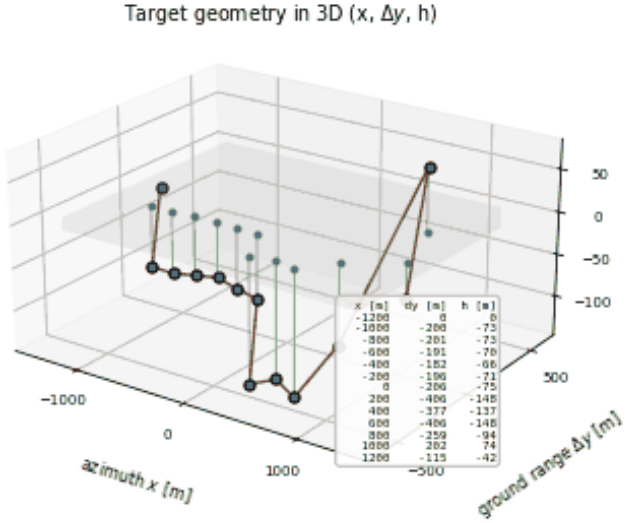


PW-SL-001 | SATA 1D | piecewise ramp: N = 5, random slopes over 2600-m steps, seed 0, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

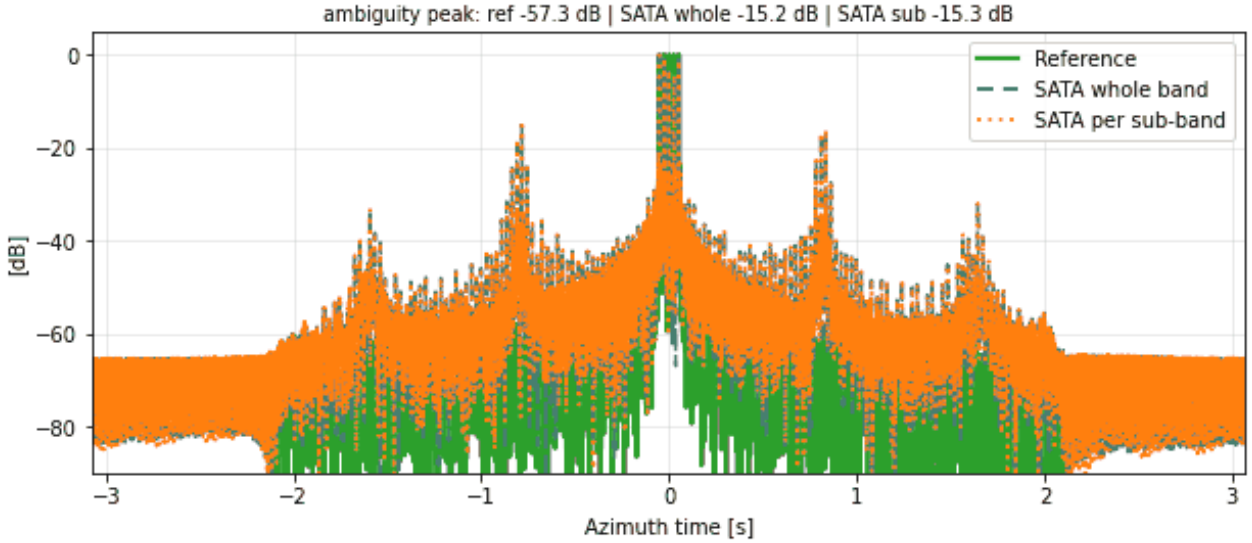


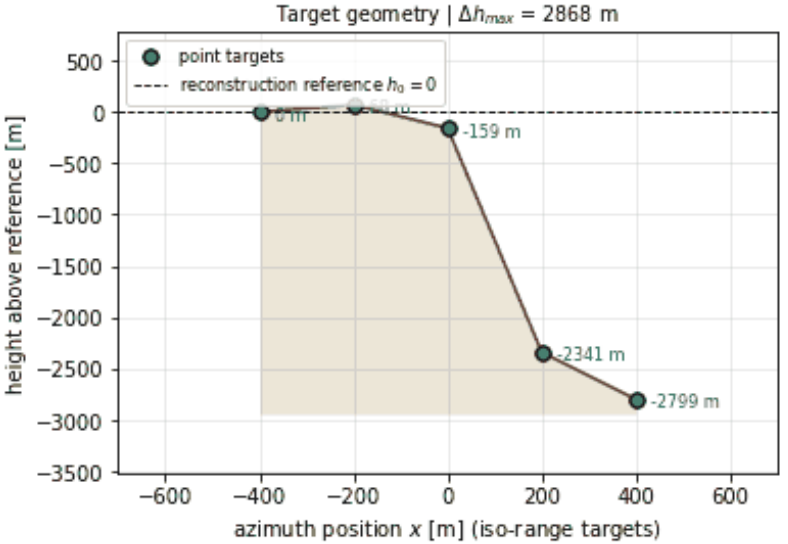


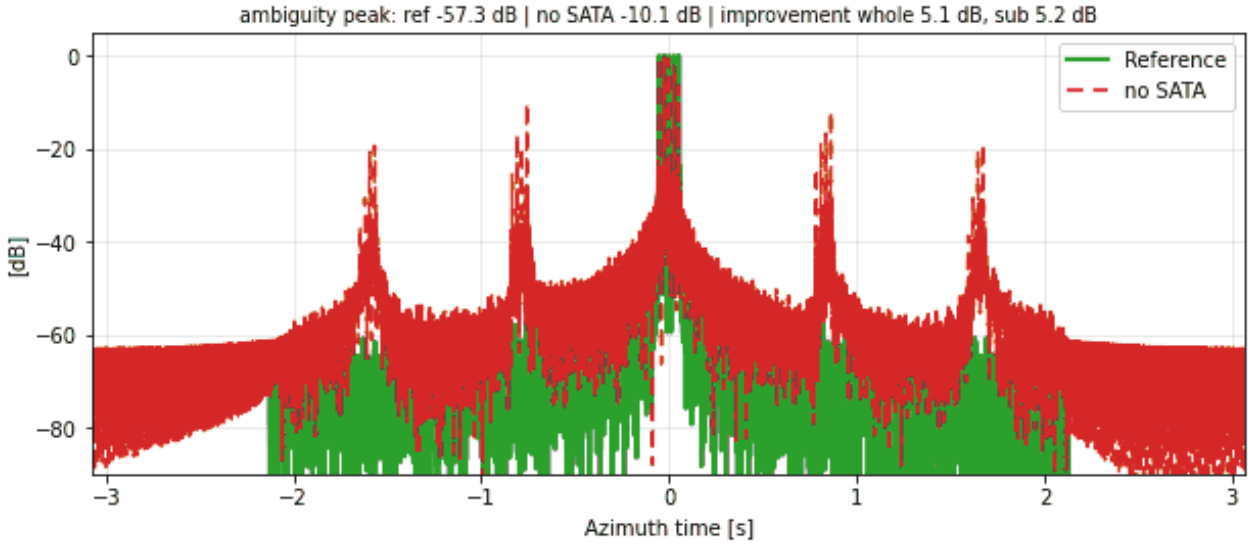


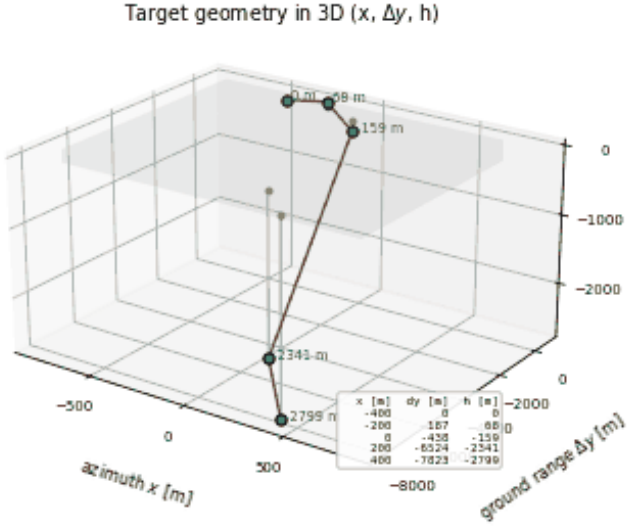


PW-SL-002 | SATA 1D | piecewise ramp: N = 5, random slopes over 2600-m steps, seed 1, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

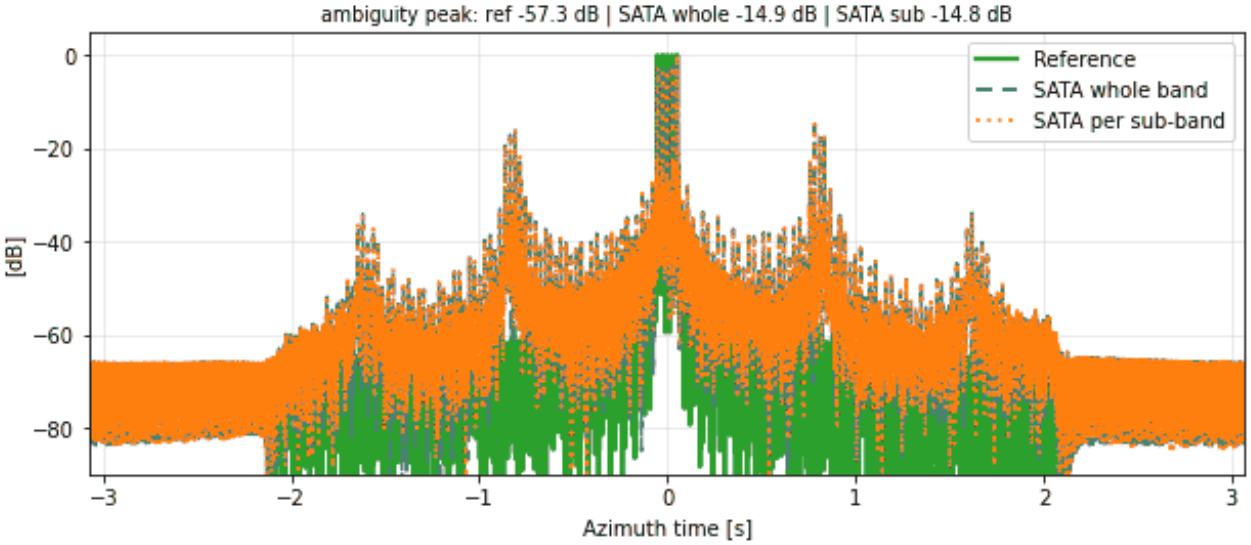


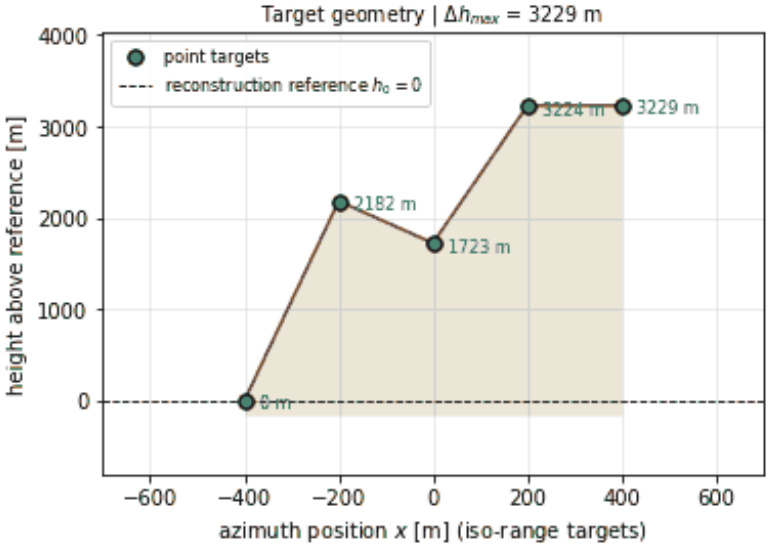


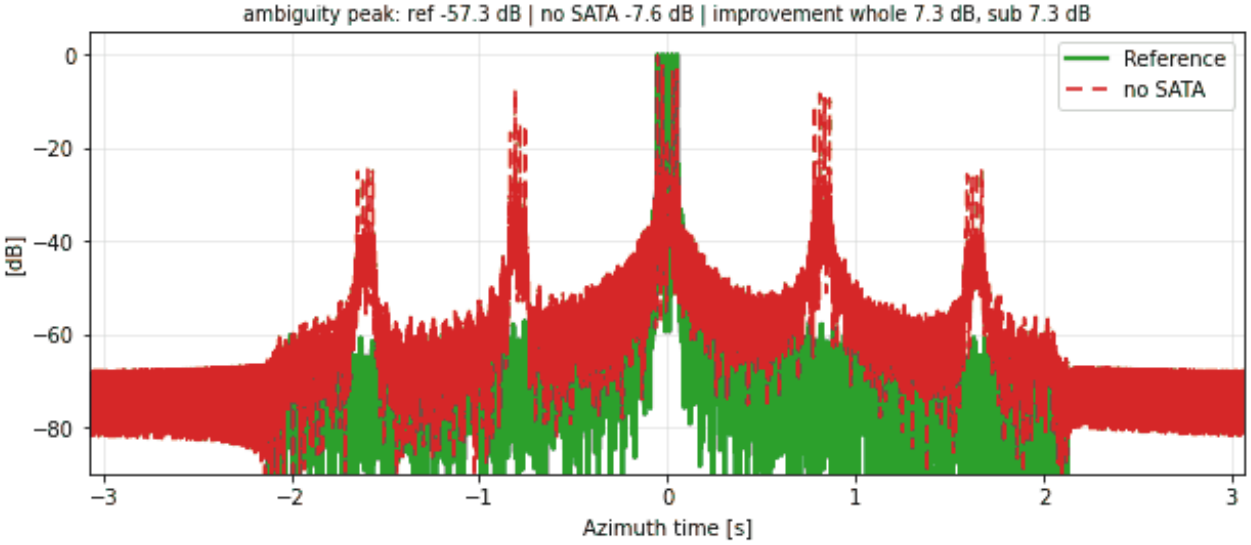


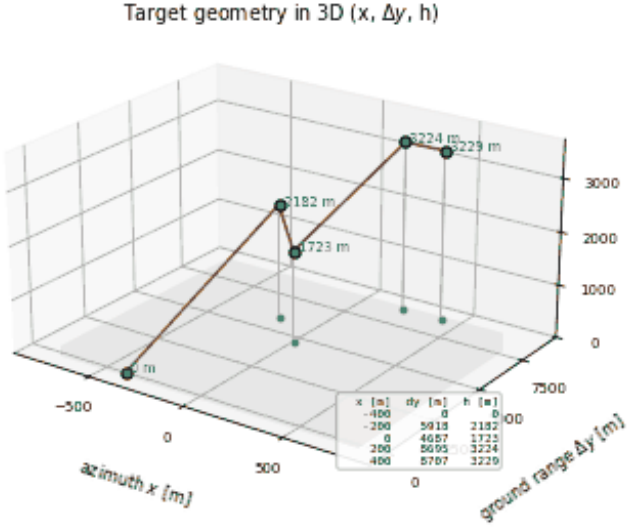


PW-SL-003 | SATA 1D | piecewise ramp: N = 5, random slopes over 2600-m steps, seed 2, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

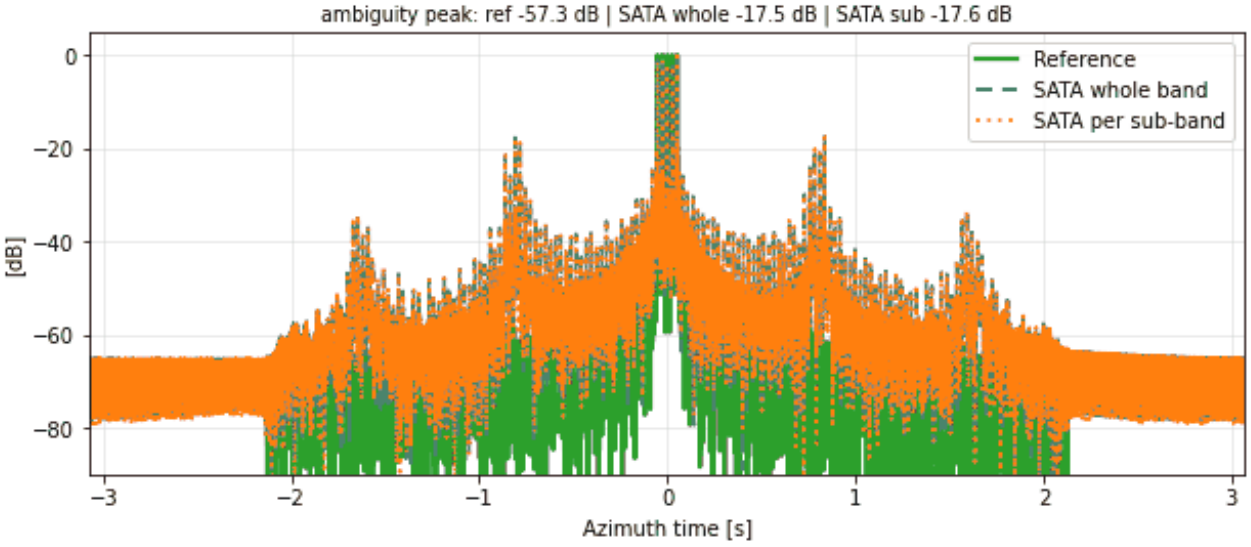


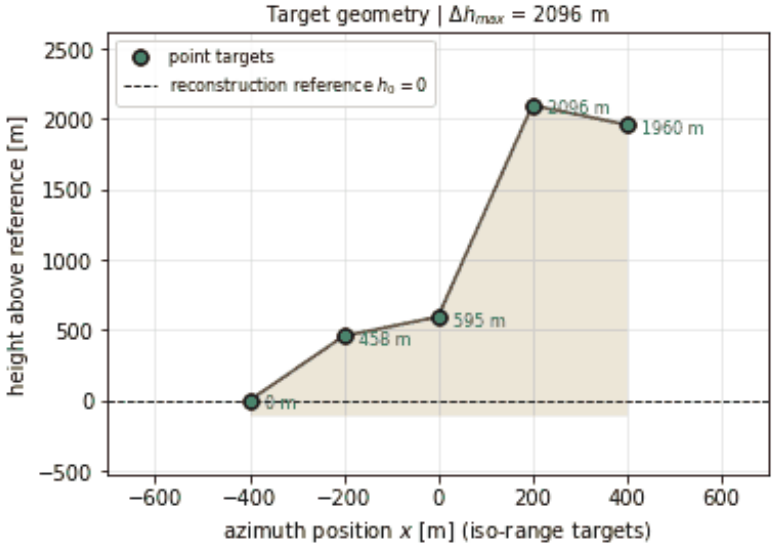


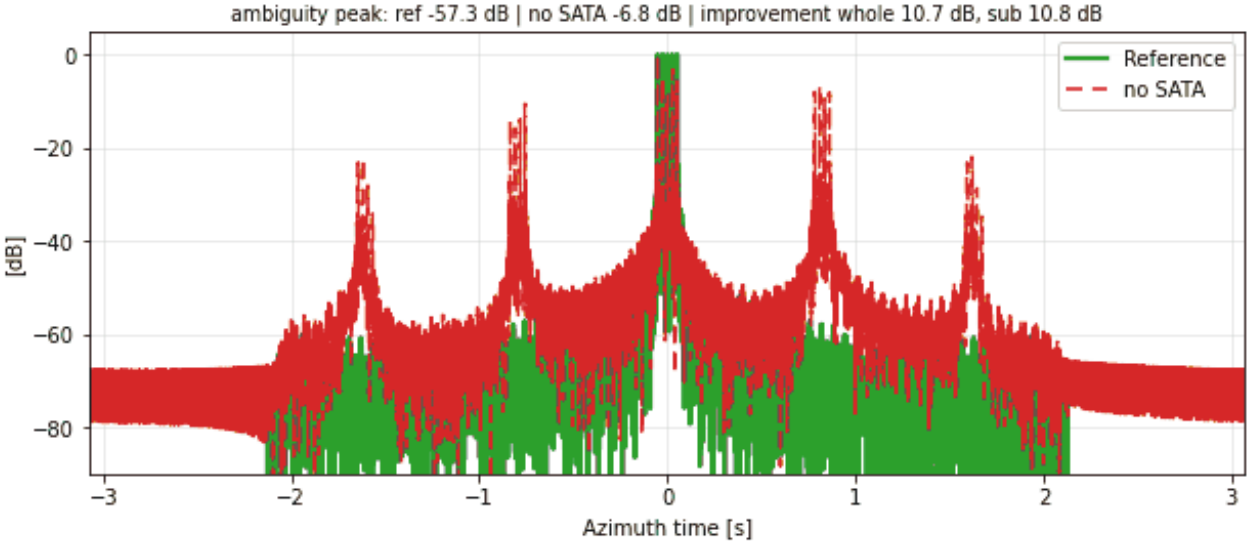


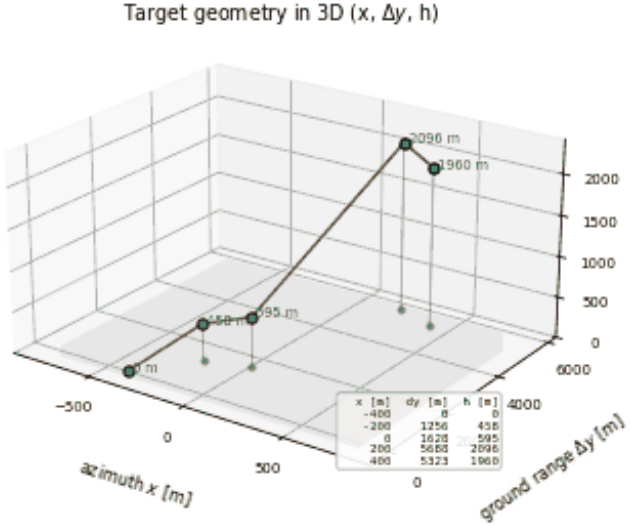


PW-SL-004 | SATA 1D | piecewise ramp: N = 5, random slopes over 2600-m steps, seed 3, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

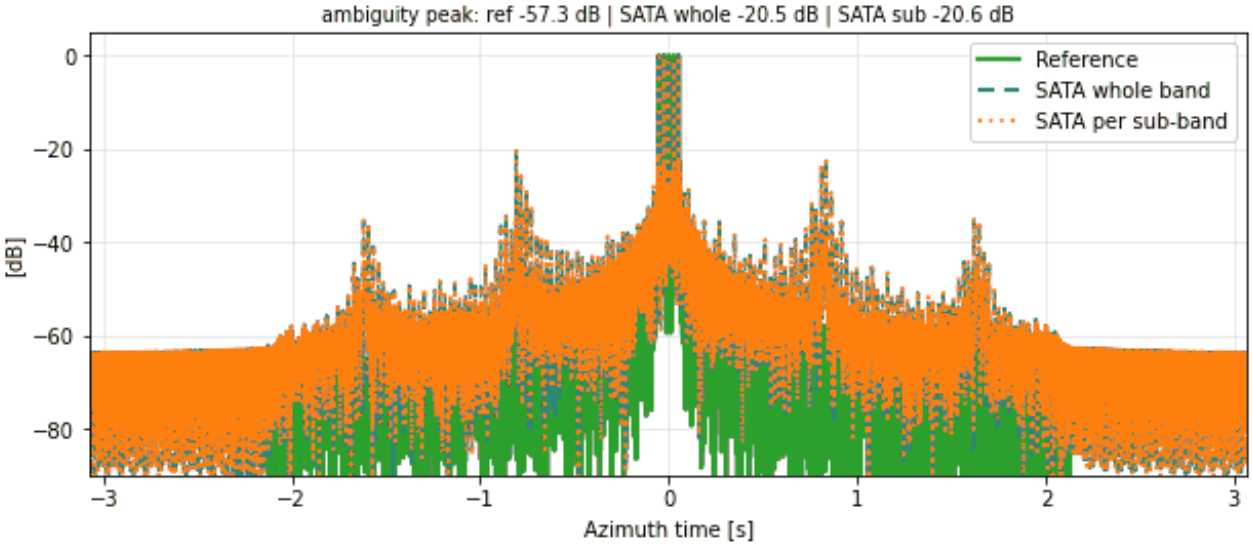

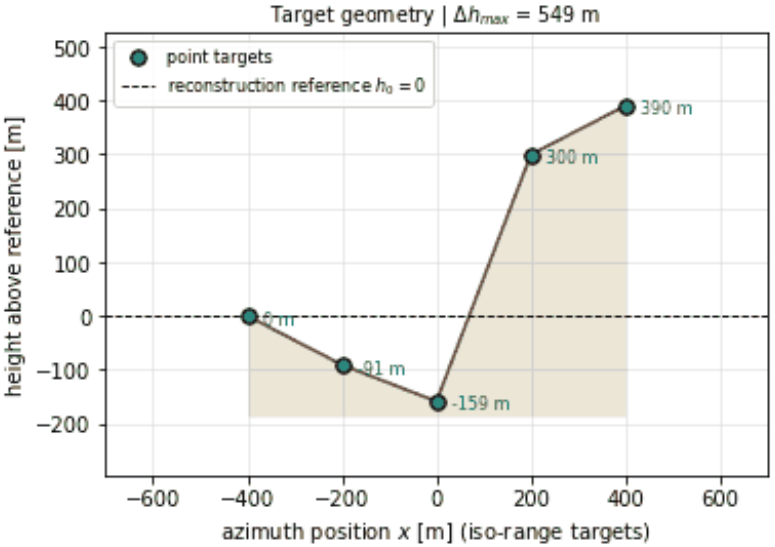


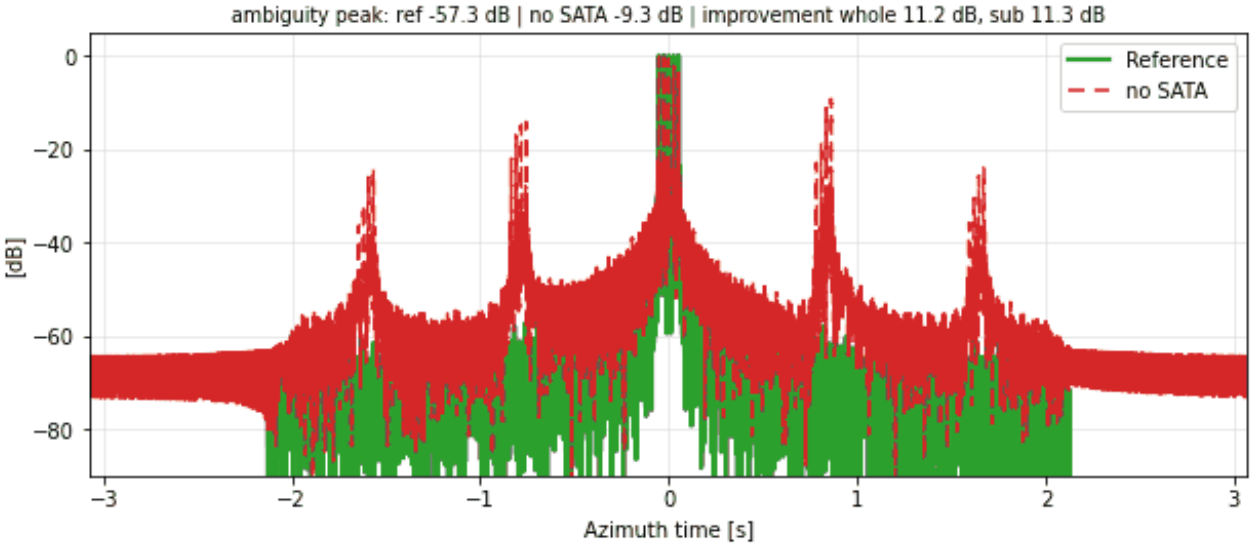


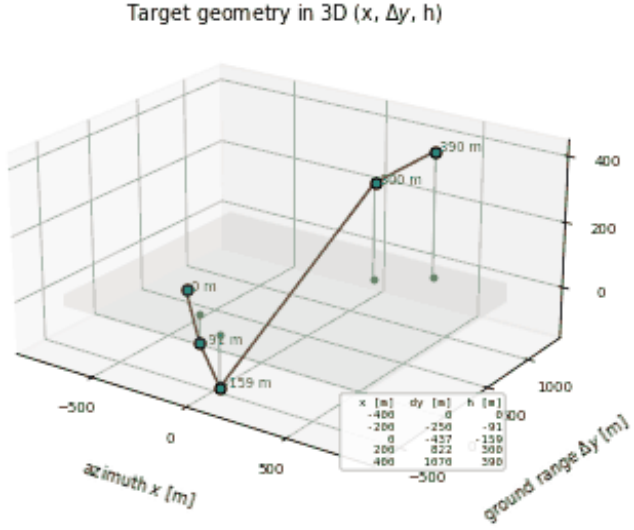



160

PW-SL-005 | SATA 1D | piecewise ramp: N = 5, random slopes over 2600-m steps, seed 4, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

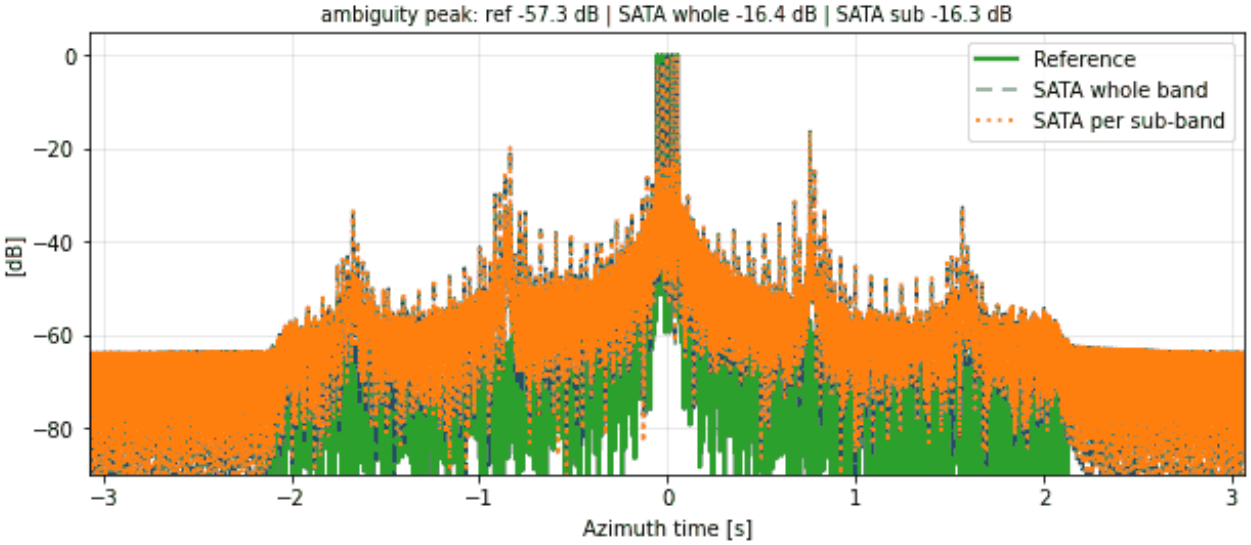


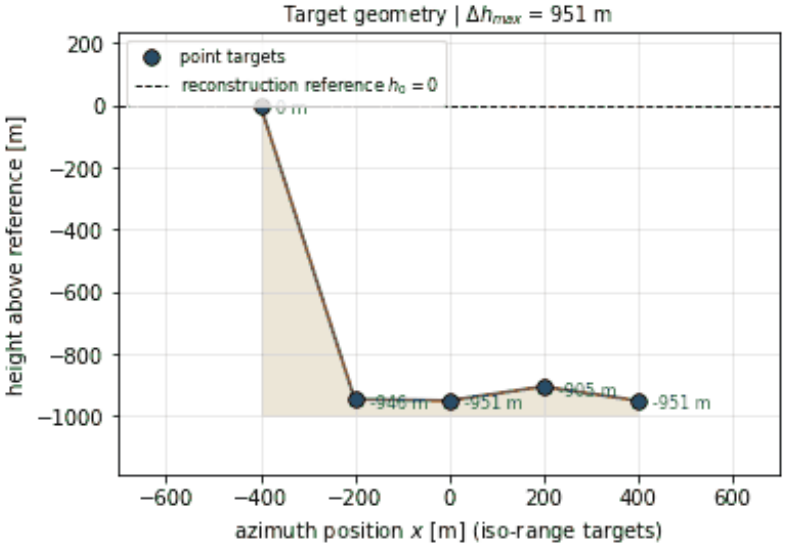


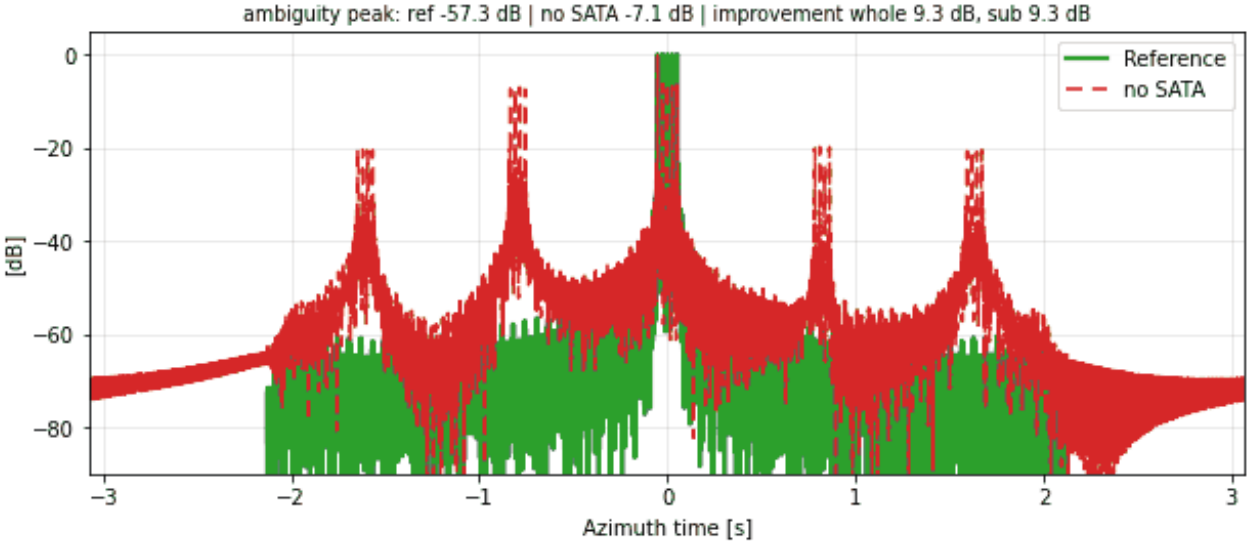


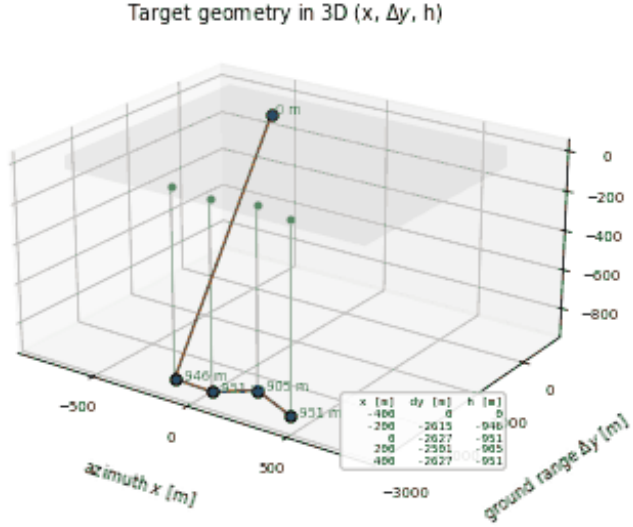


PW-SL-006 | SATA 1D | piecewise ramp: N = 9, random slopes over 2600-m steps, seed 0, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

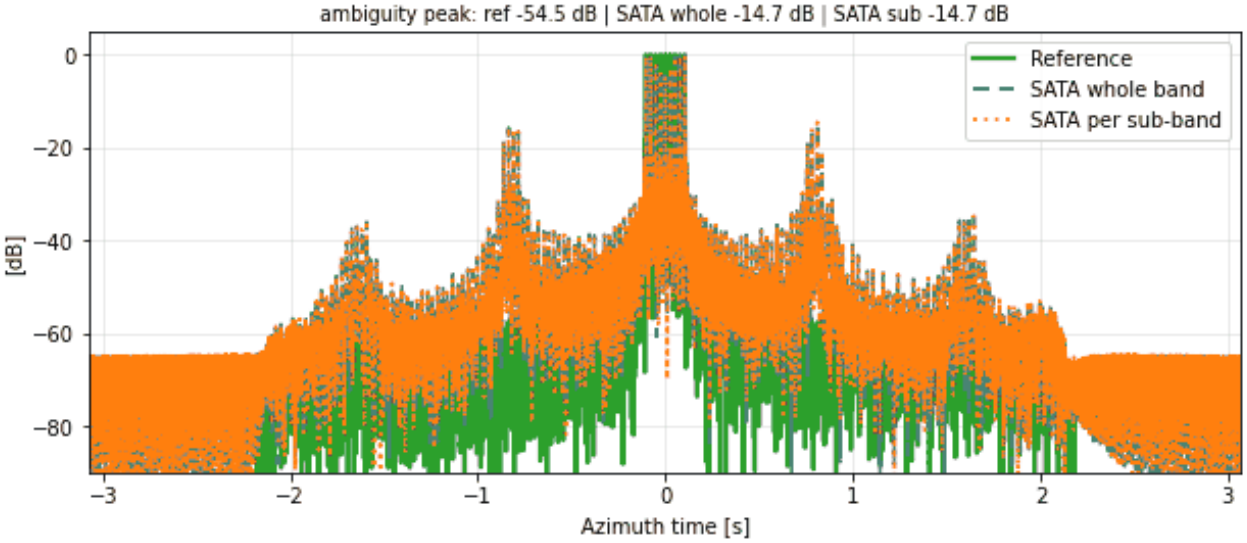


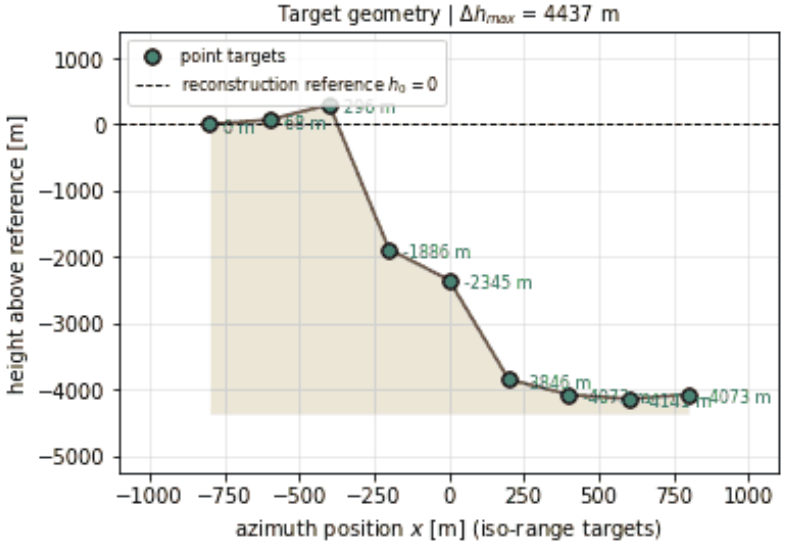


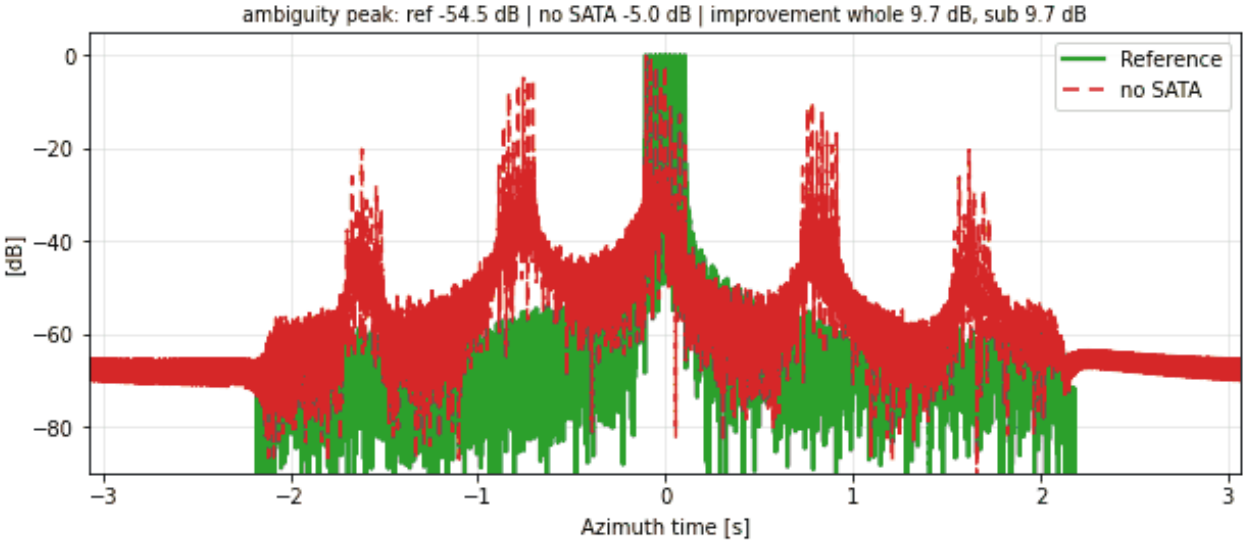


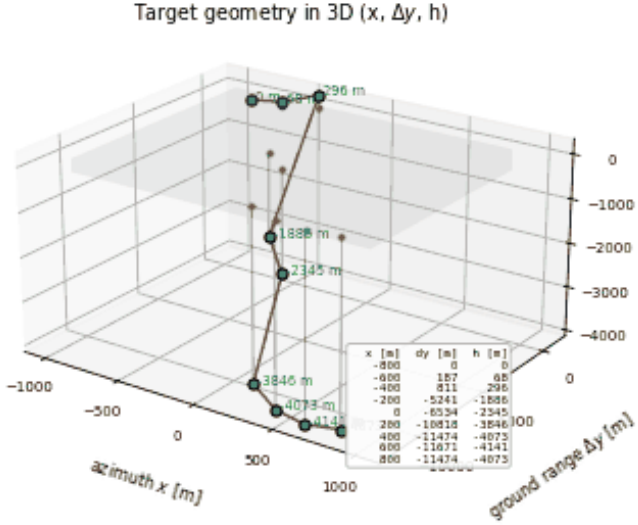


PW-SL-007 | SATA 1D | piecewise ramp: N = 9, random slopes over 2600-m steps, seed 1, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

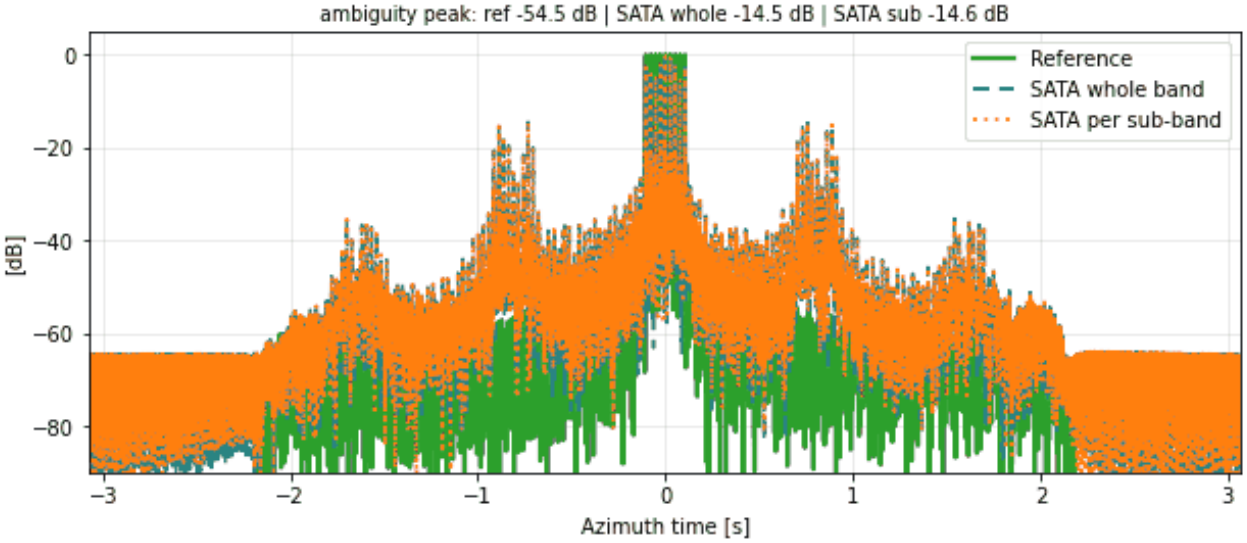


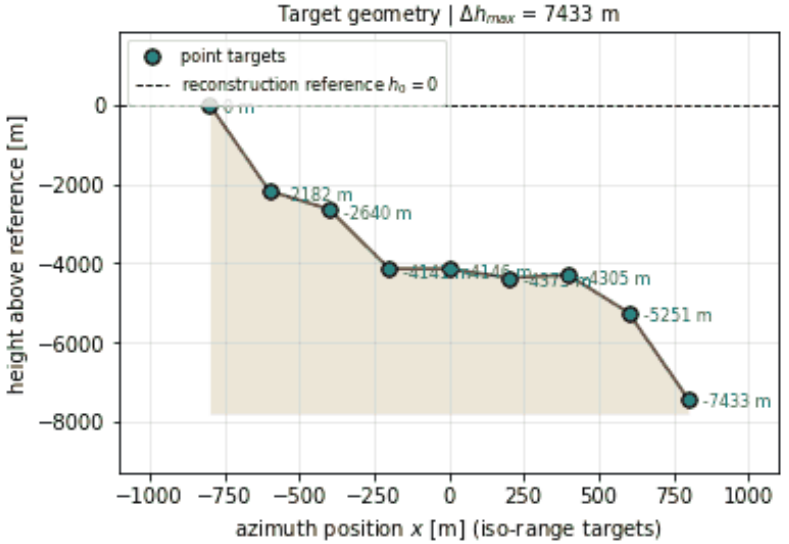


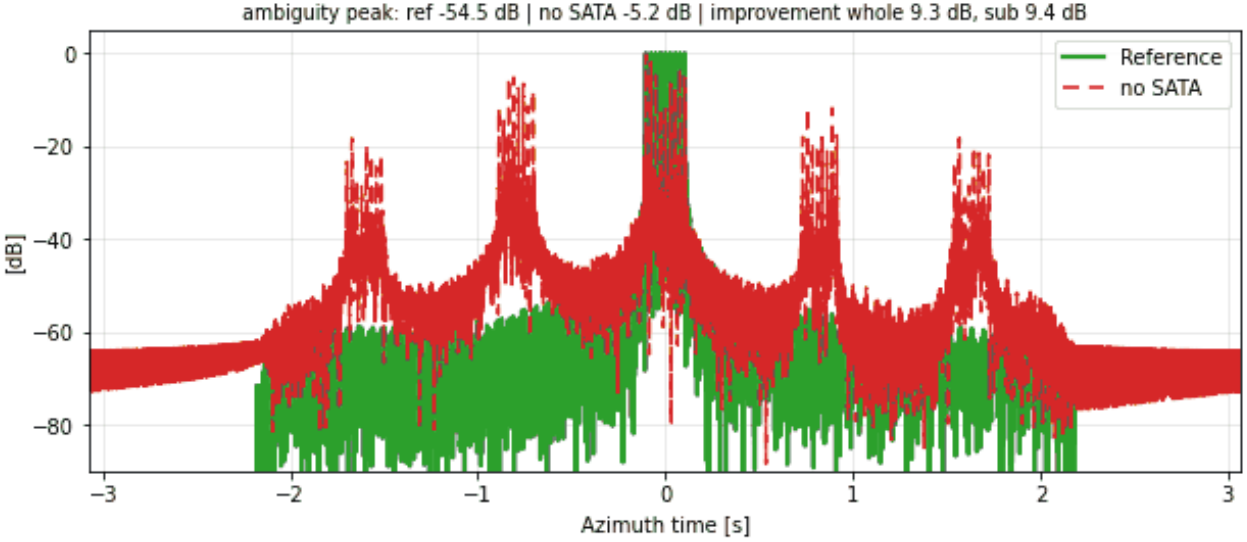


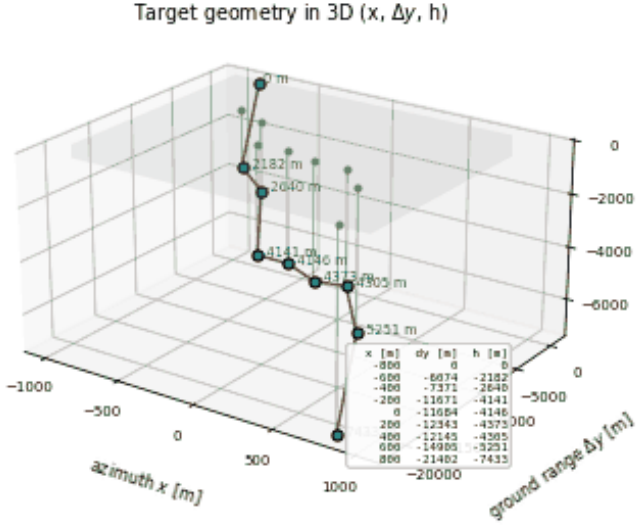


PW-SL-008 | SATA 1D | piecewise ramp: N = 9, random slopes over 2600-m steps, seed 2, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

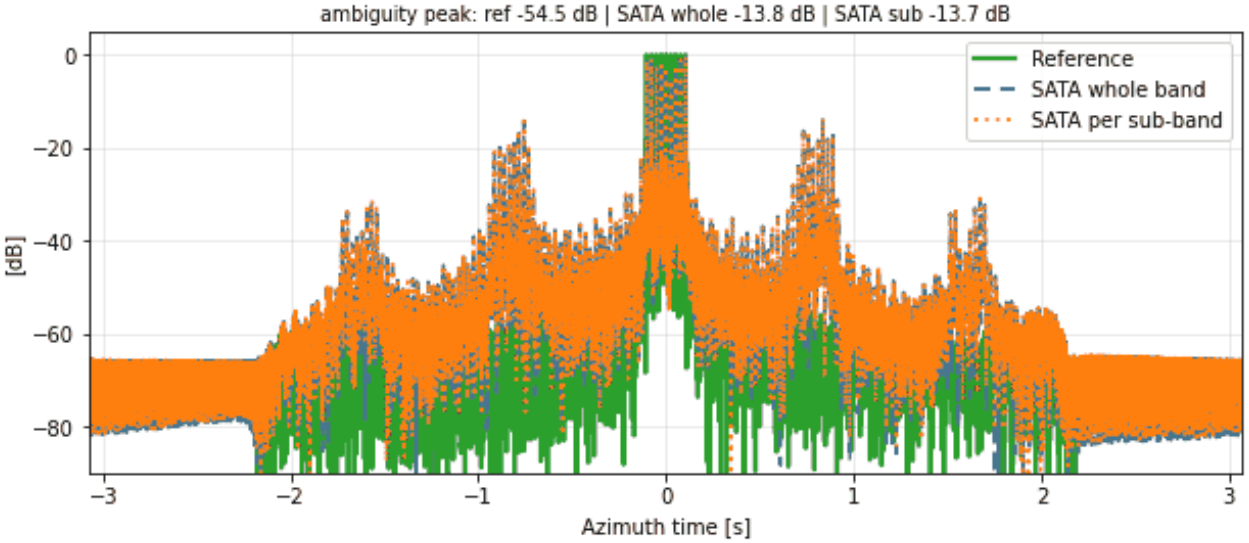


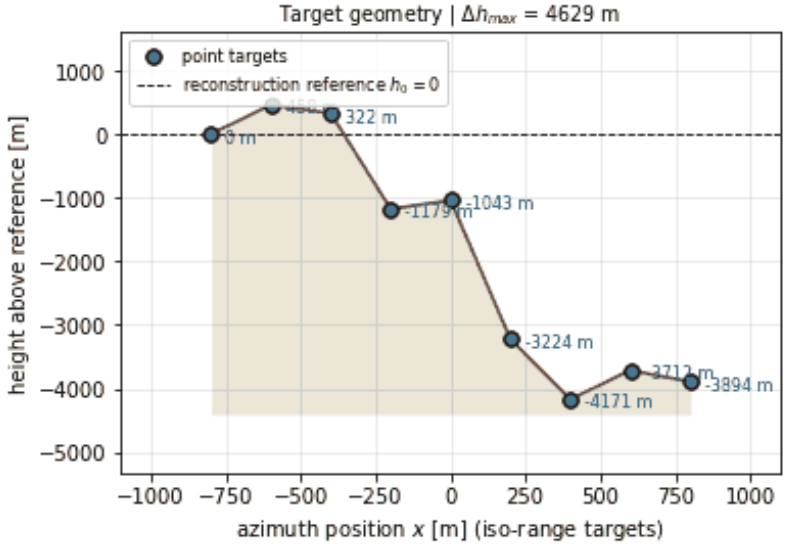


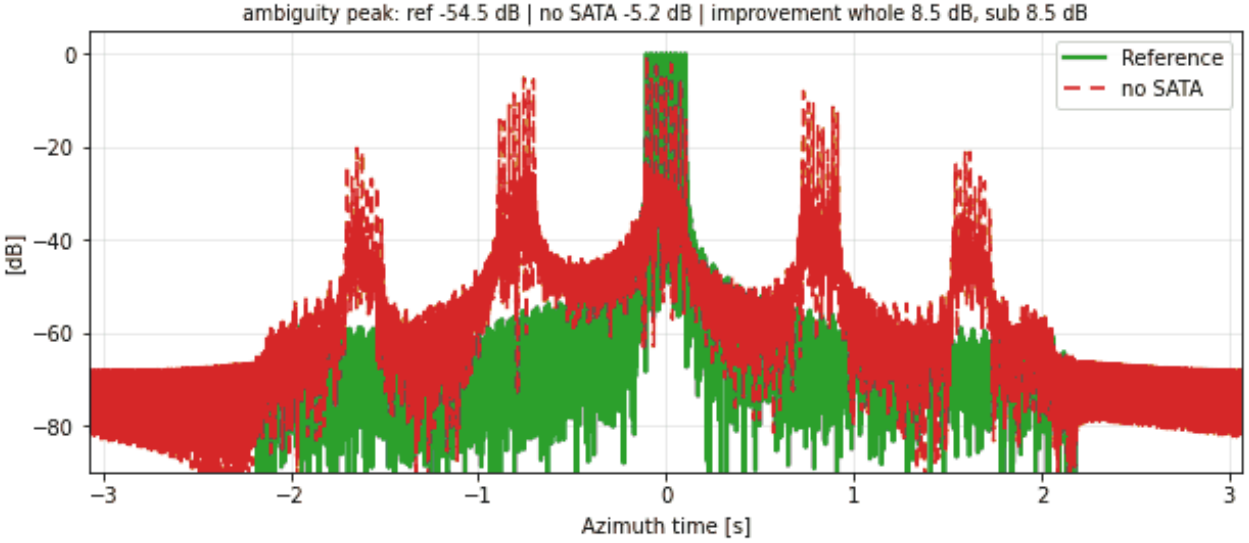


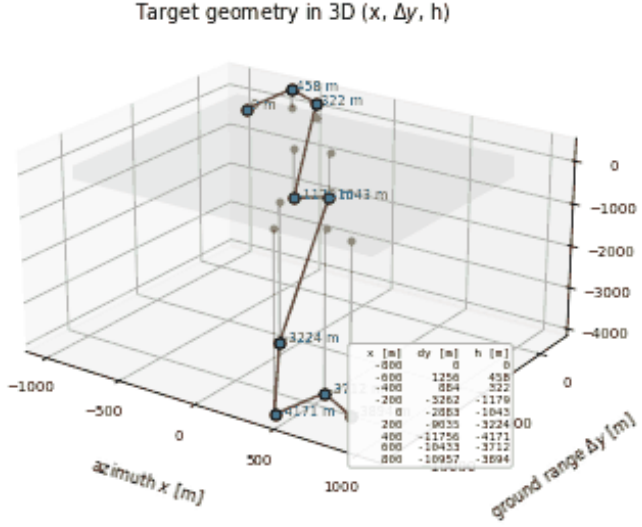


PW-SL-009 | SATA 1D | piecewise ramp: N = 9, random slopes over 2600-m steps, seed 3, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

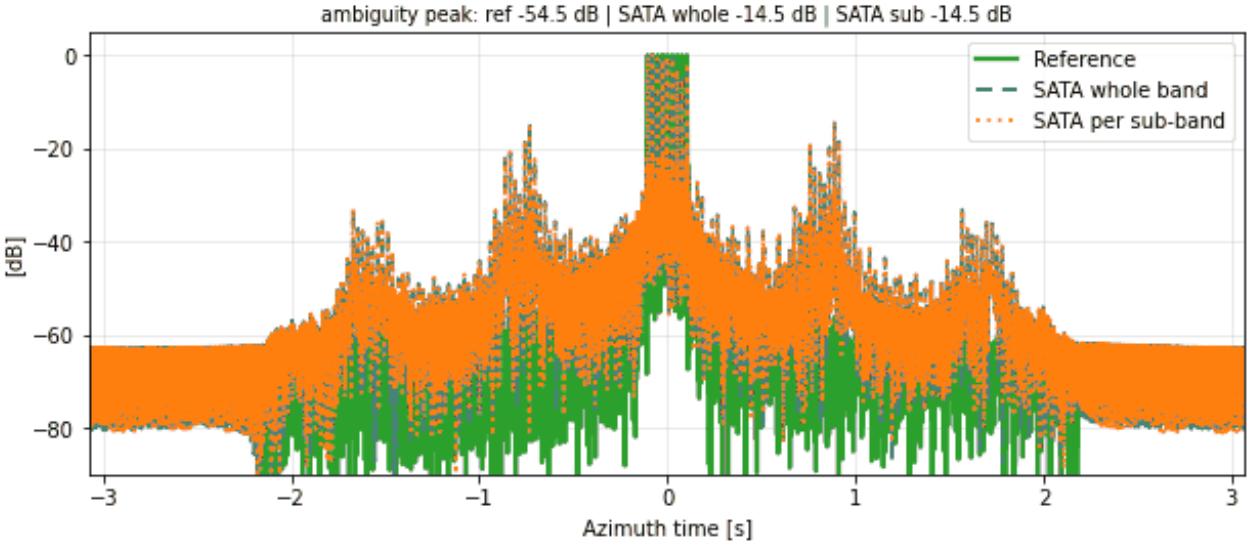


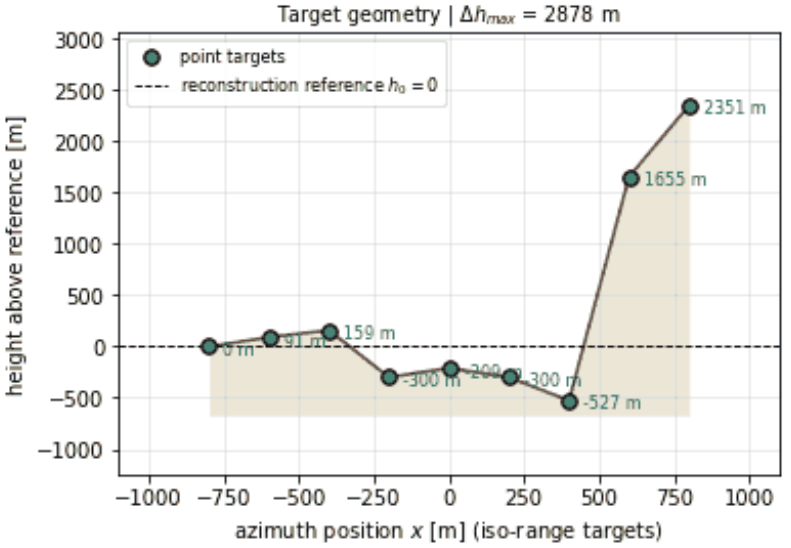


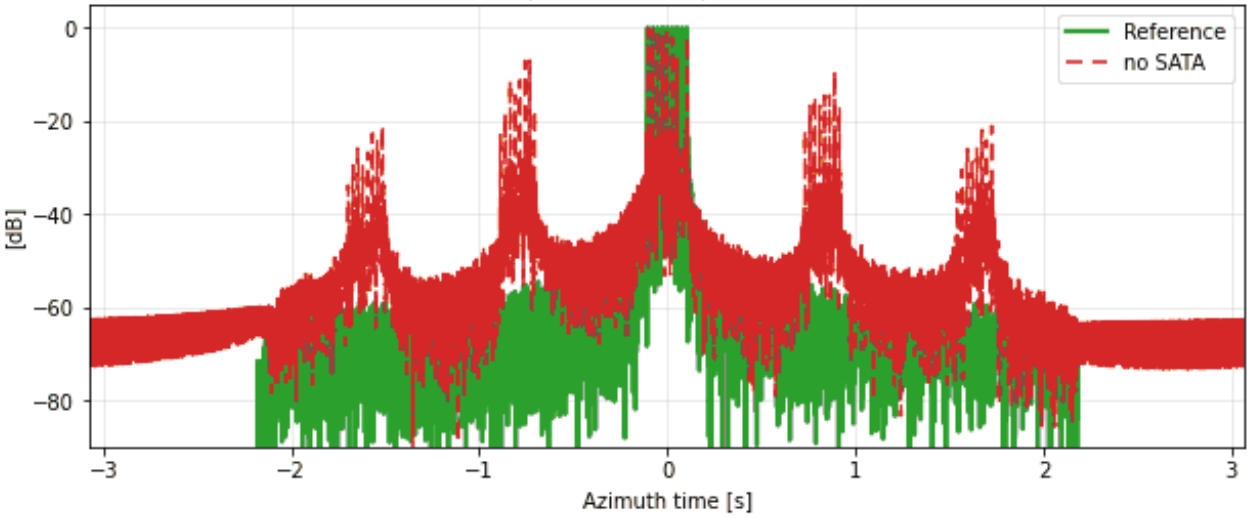


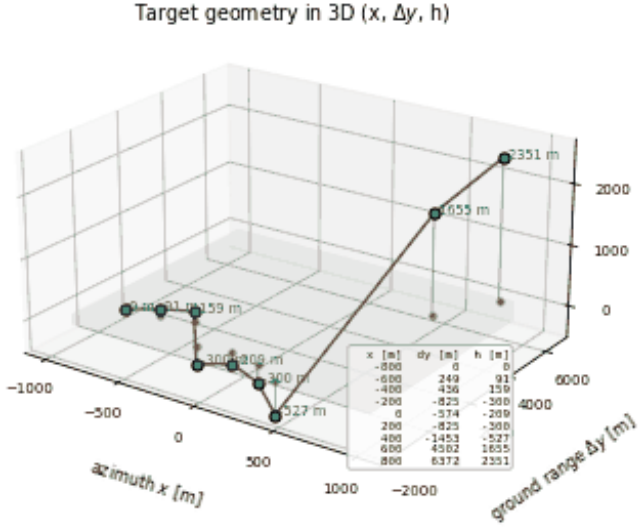


PW-SL-010 | SATA 1D | piecewise ramp: N = 9, random slopes over 2600-m steps, seed 4, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

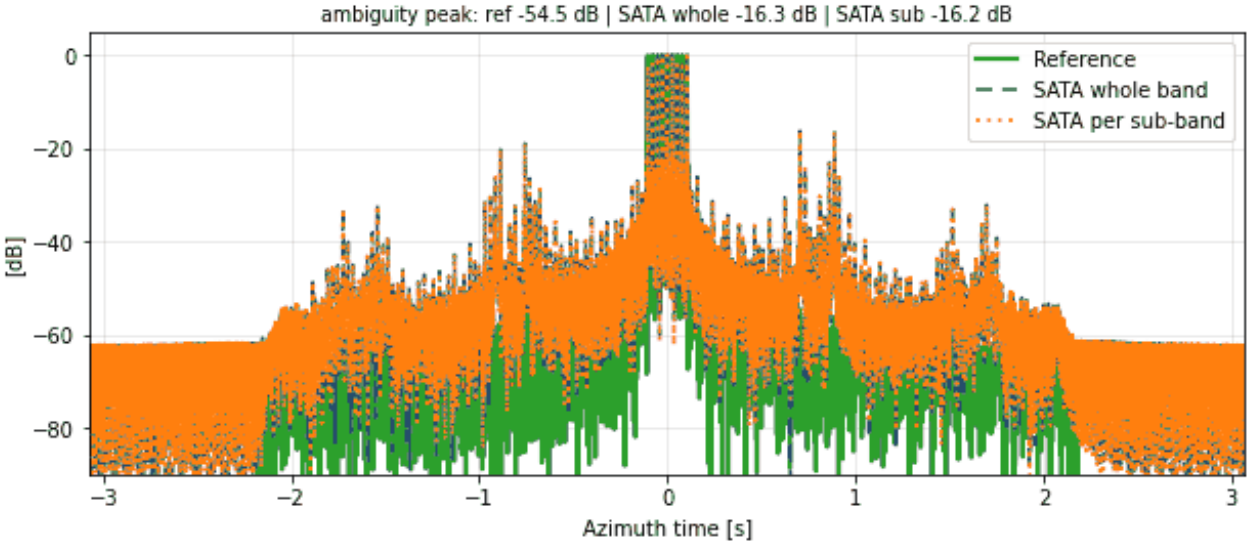


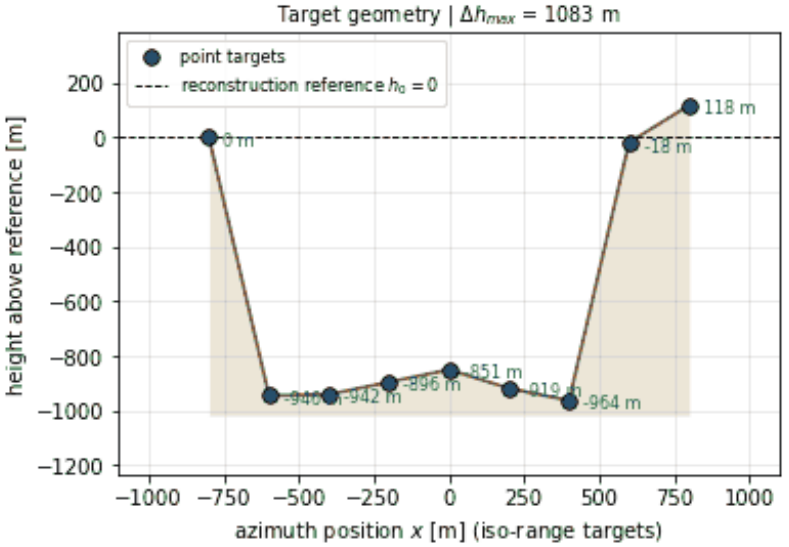


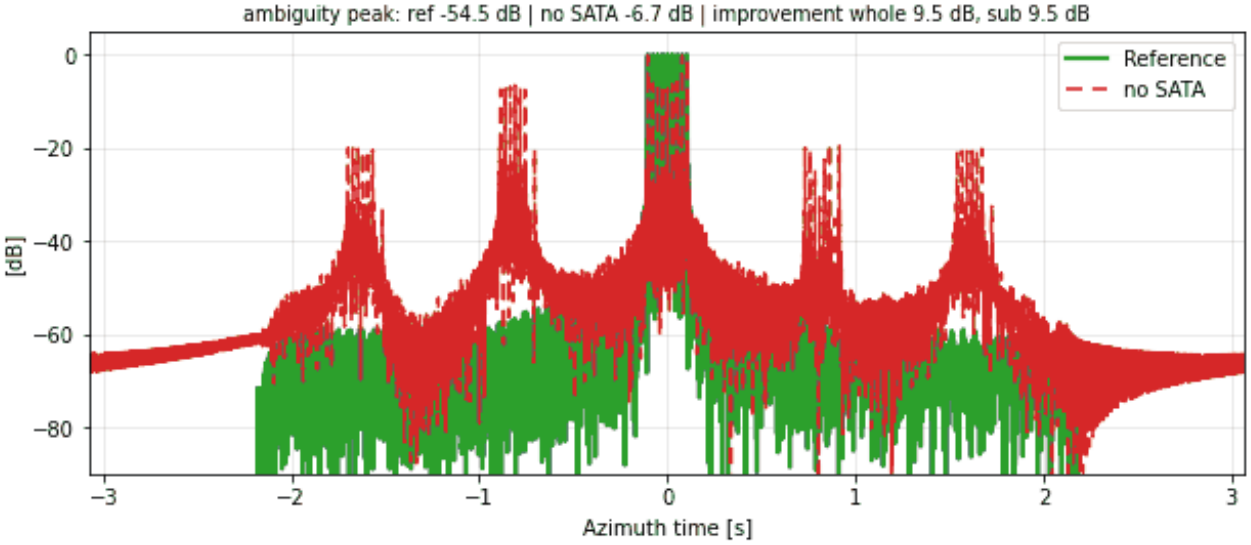


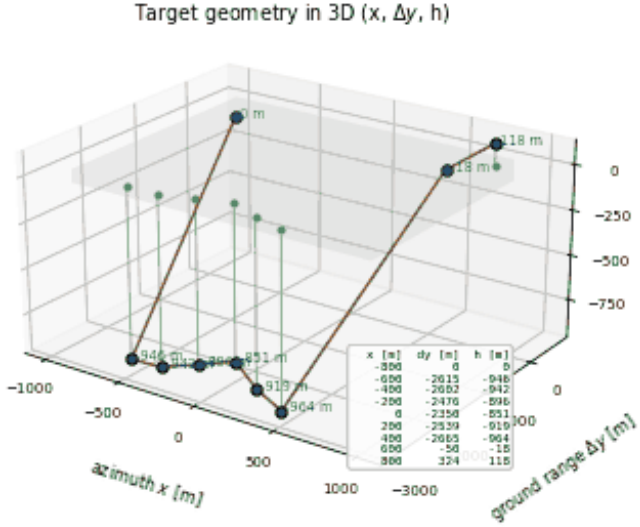


PW-SL-011 | SATA 1D | piecewise ramp: N = 13, random slopes over 2600-m steps, seed 0, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

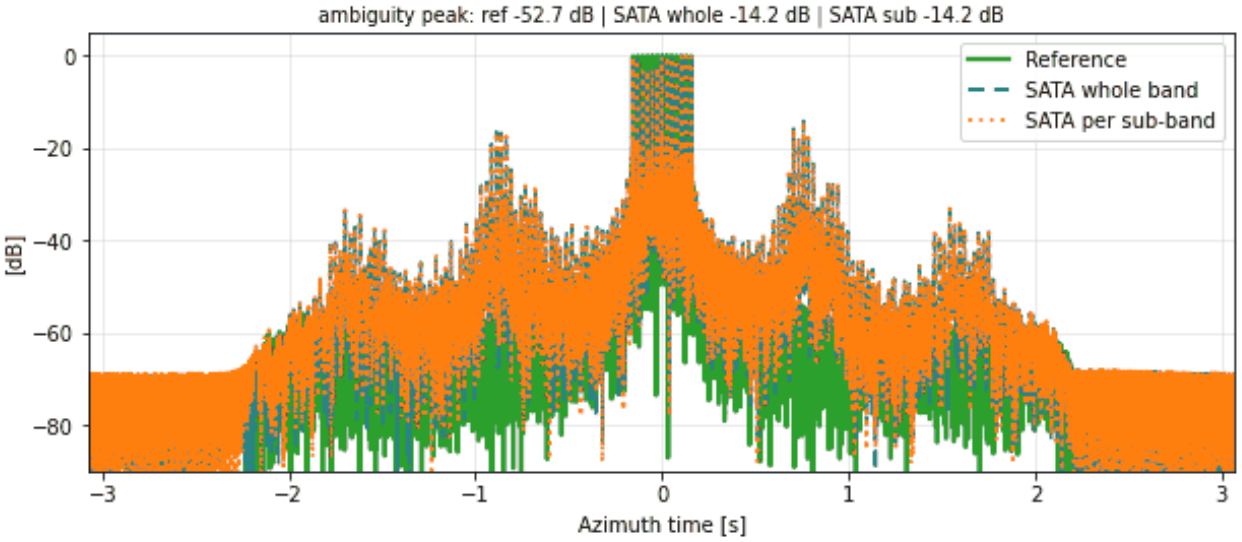


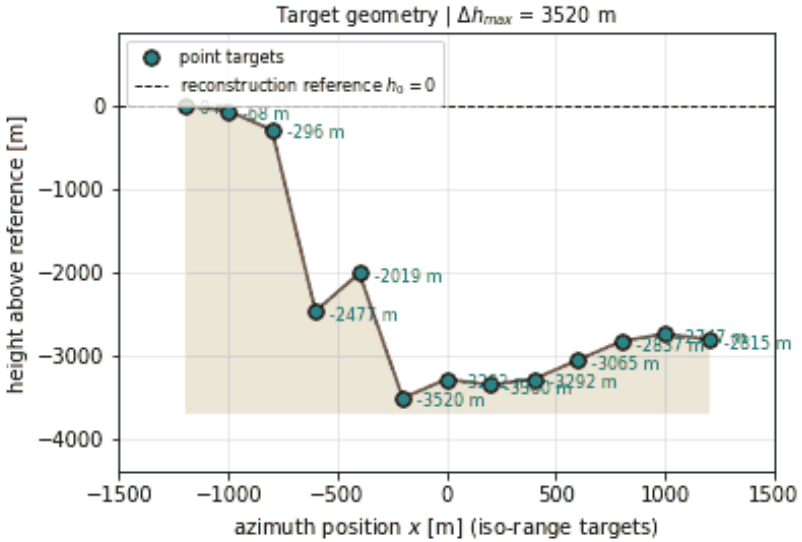


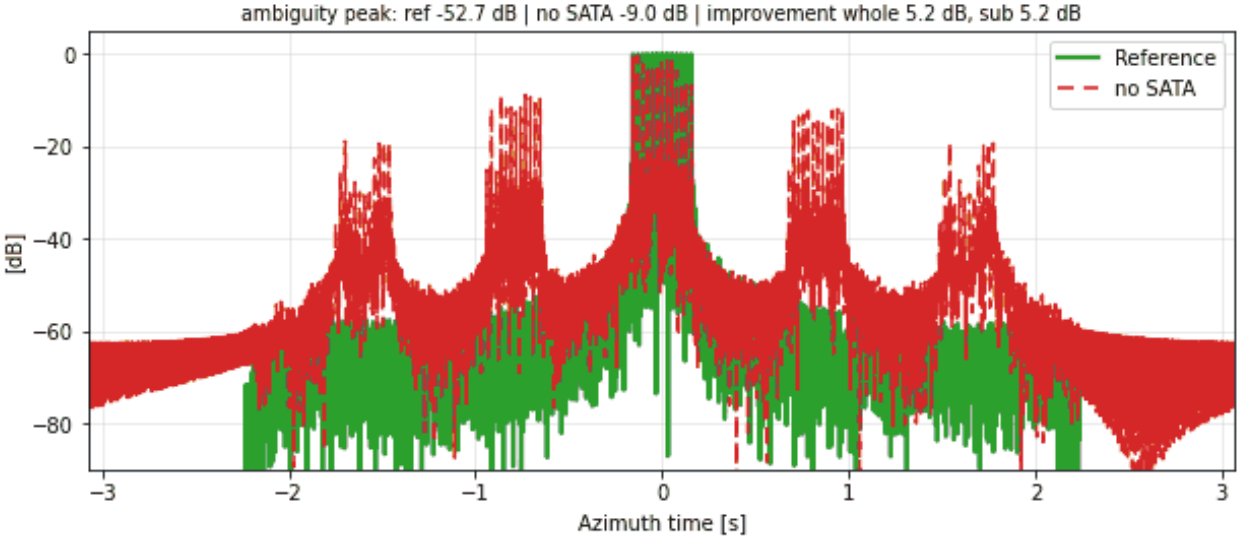


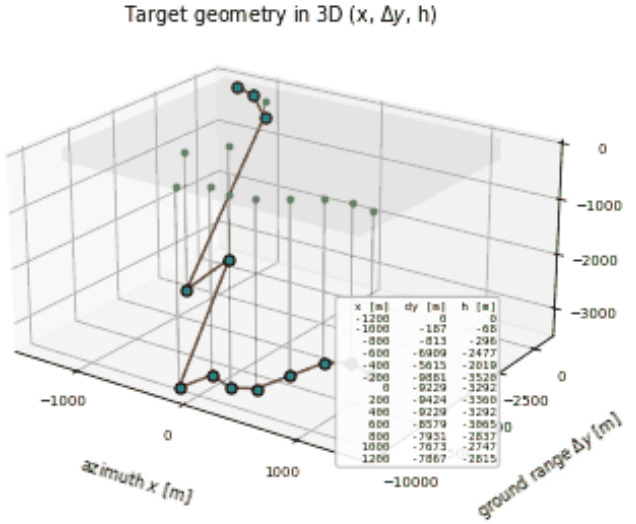


PW-SL-012 | SATA 1D | piecewise ramp: N = 13, random slopes over 2600-m steps, seed 1, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

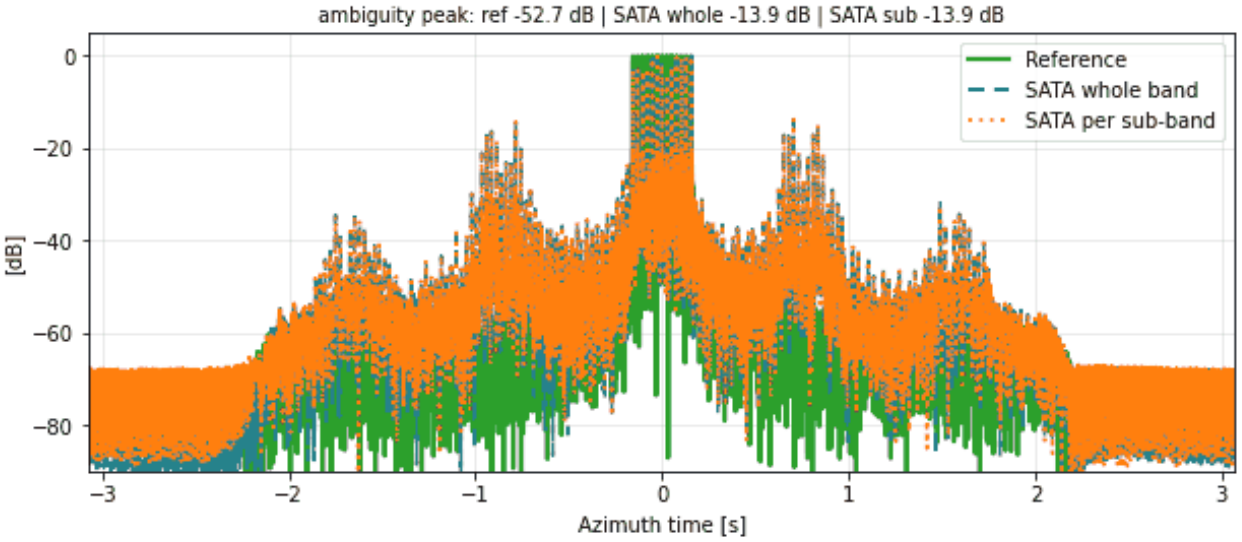


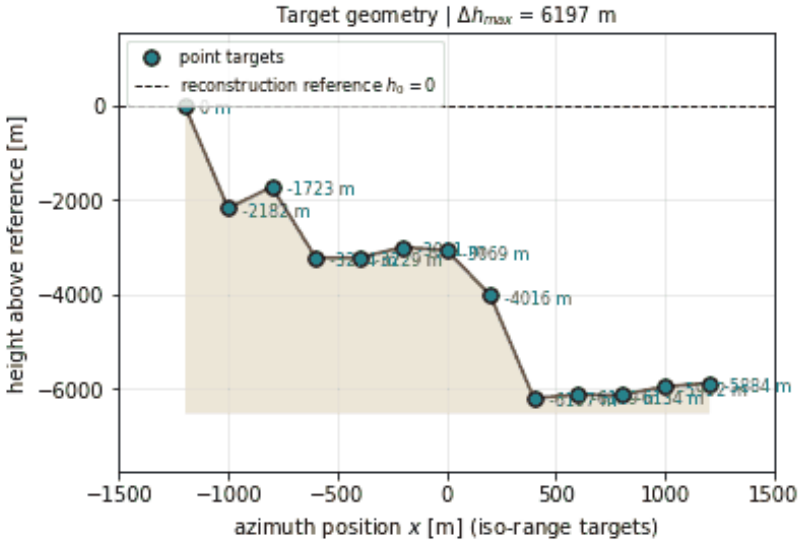


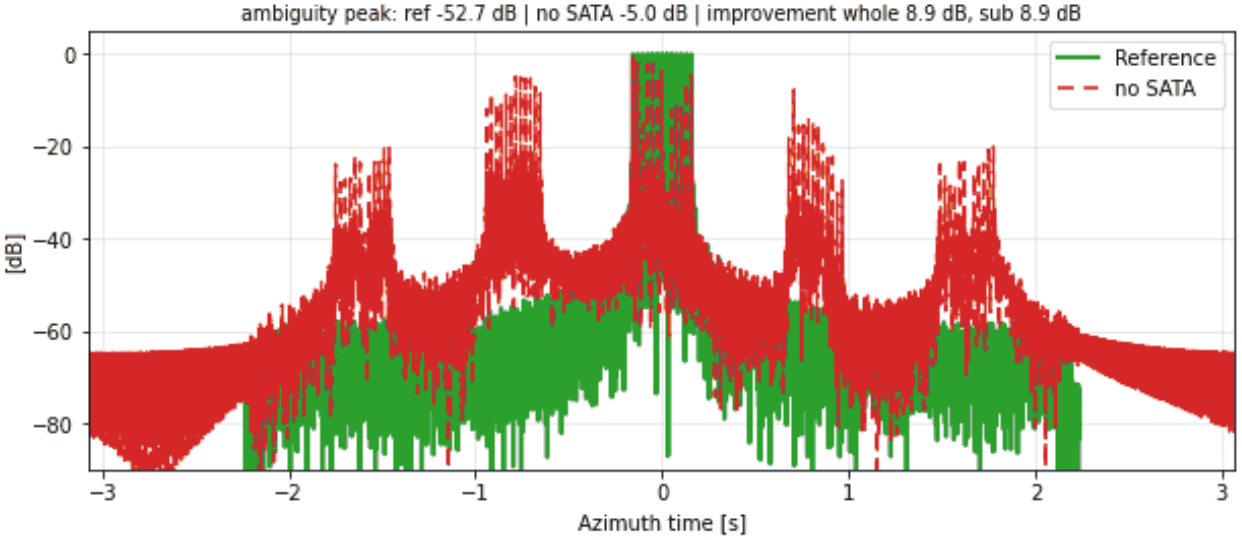


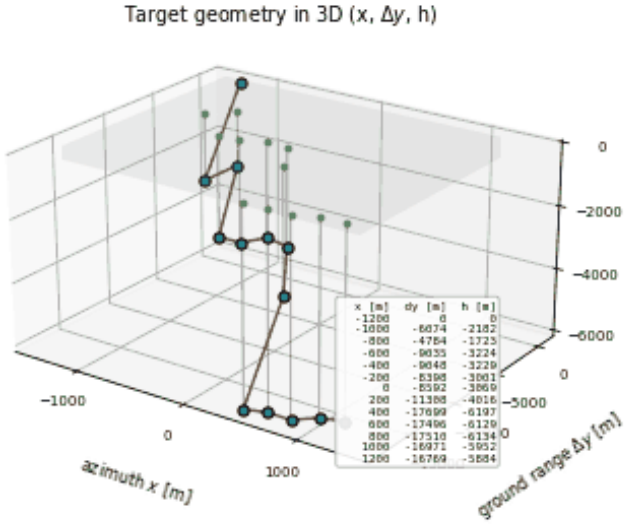


PW-SL-013 | SATA 1D | piecewise ramp: N = 13, random slopes over 2600-m steps, seed 2, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

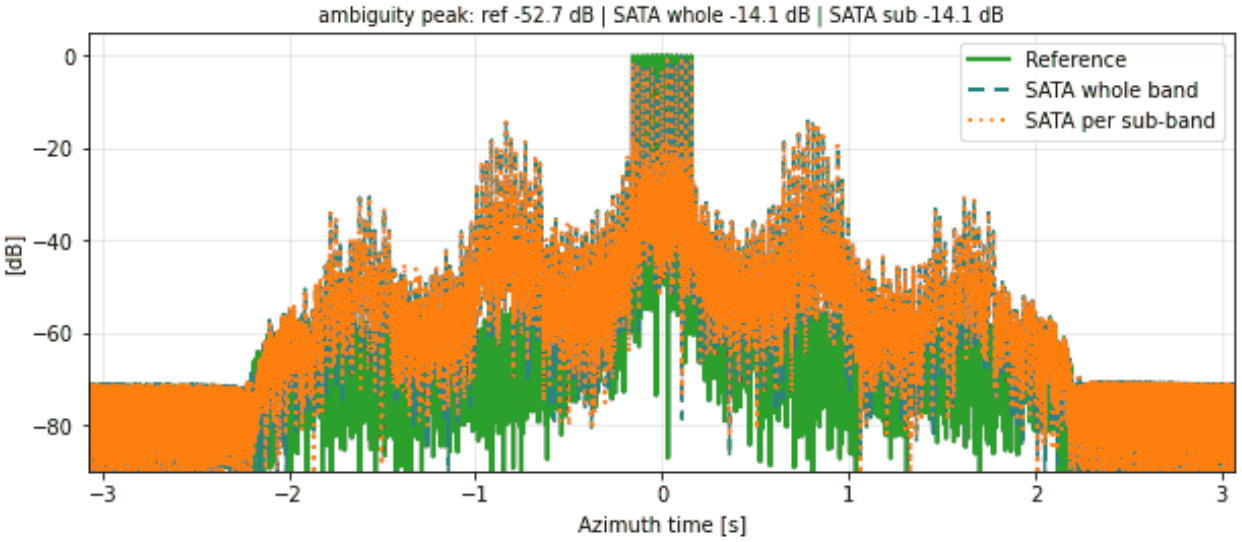


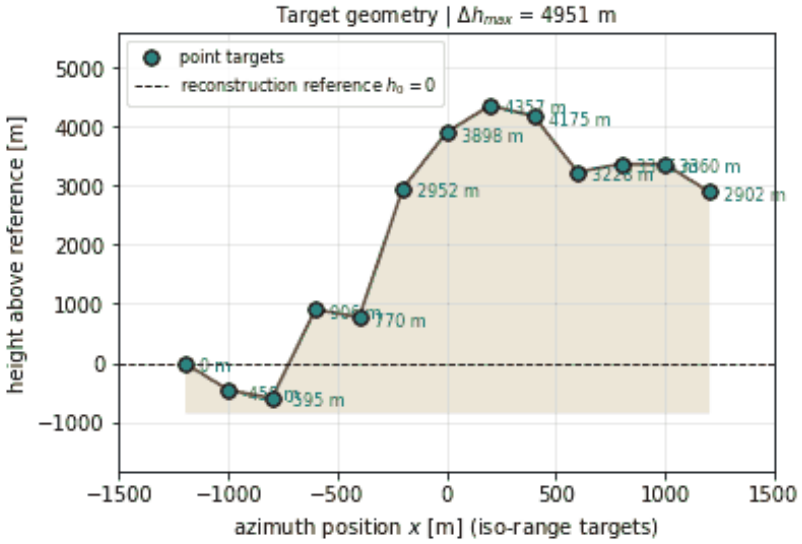


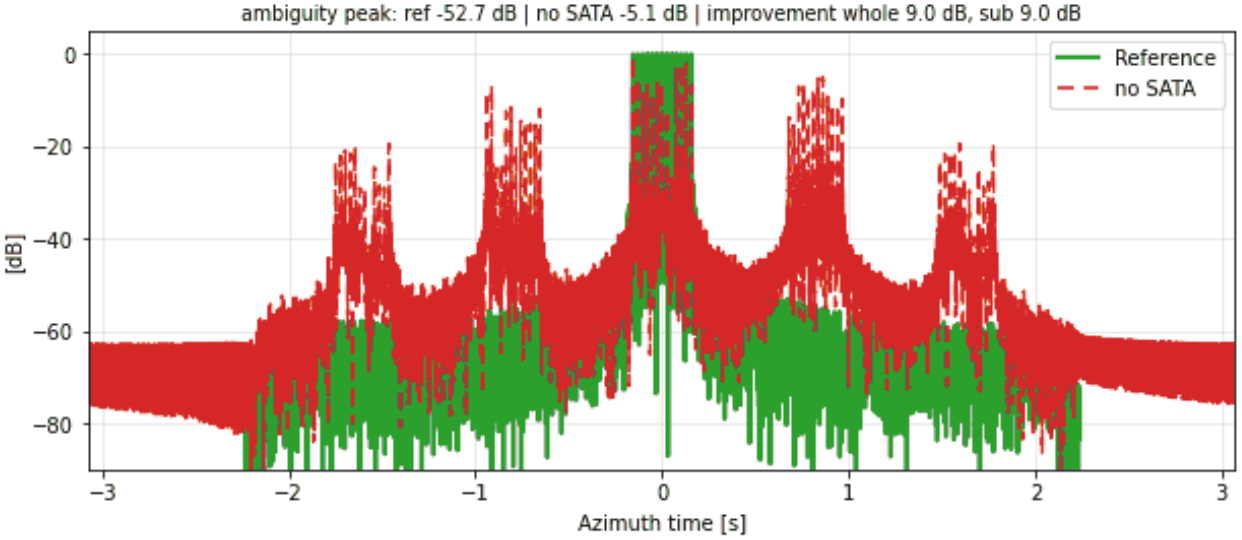


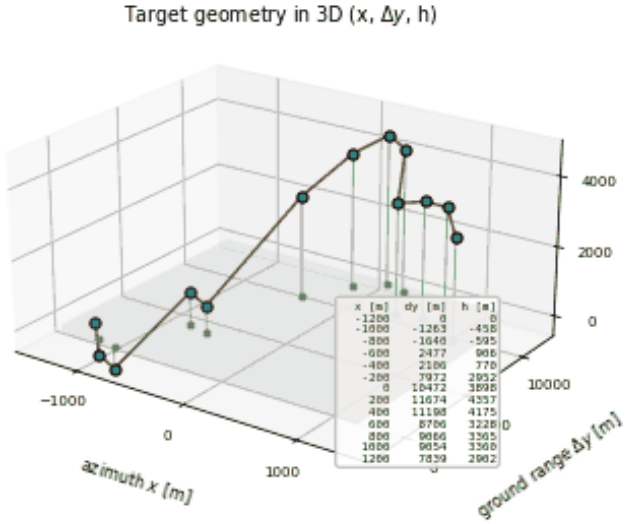


PW-SL-014 | SATA 1D | piecewise ramp: N = 13, random slopes over 2600-m steps, seed 3, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

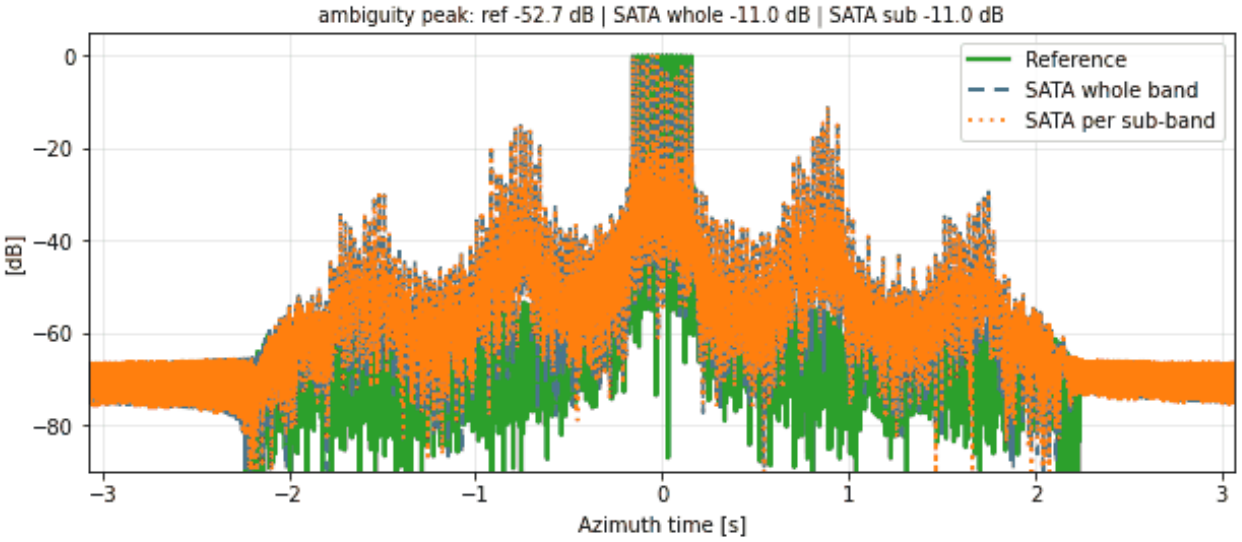


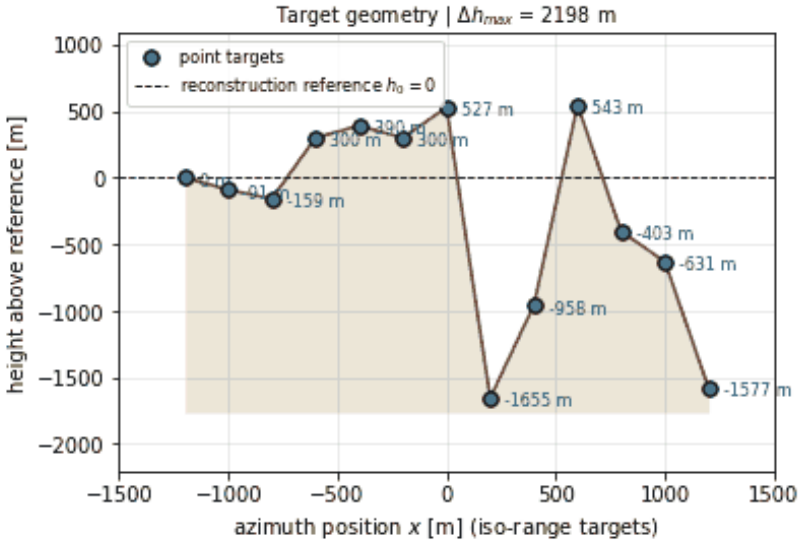


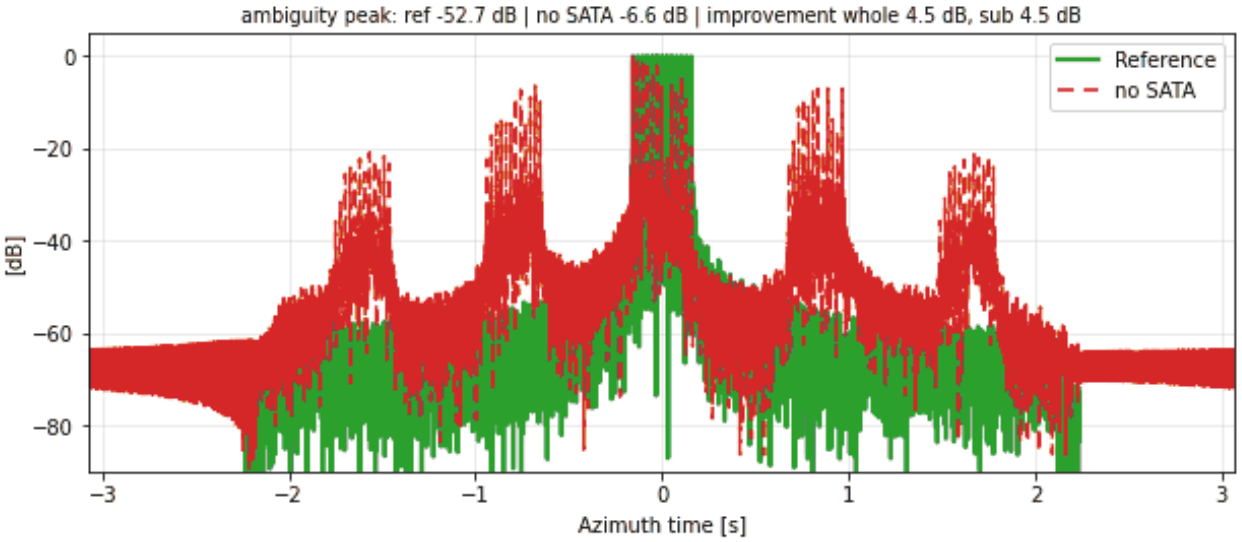


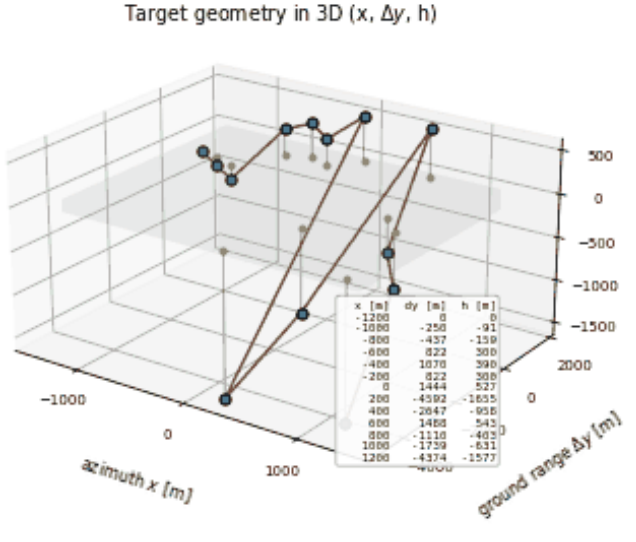


PW-SL-015 | SATA 1D | piecewise ramp: N = 13, random slopes over 2600-m steps, seed 4, targets 200 m apart (small distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

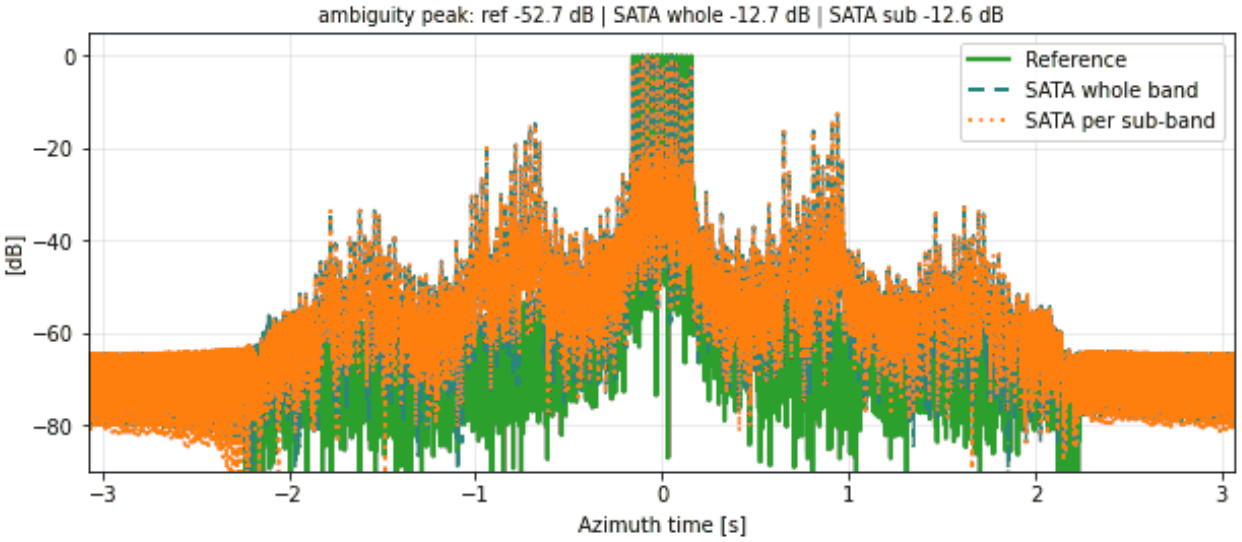


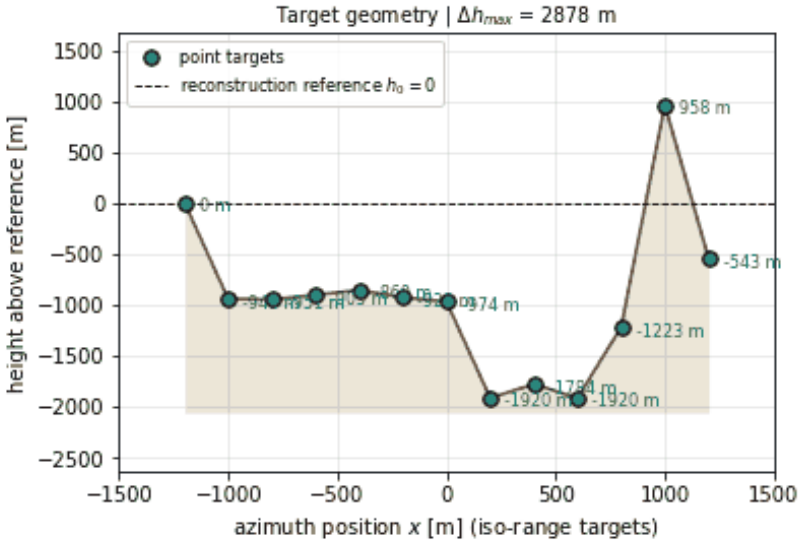


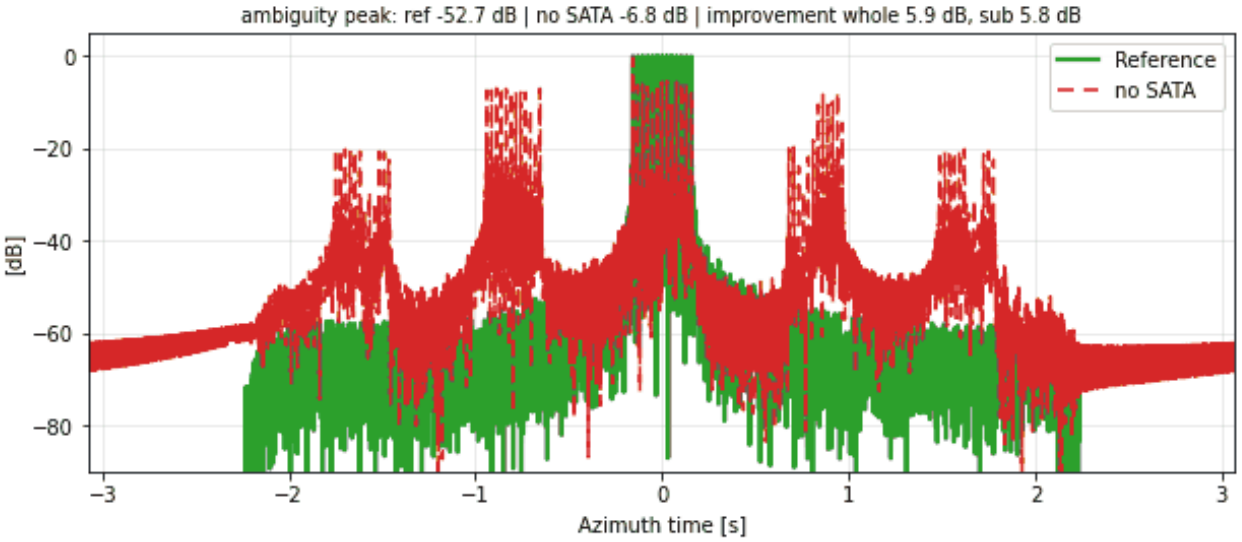


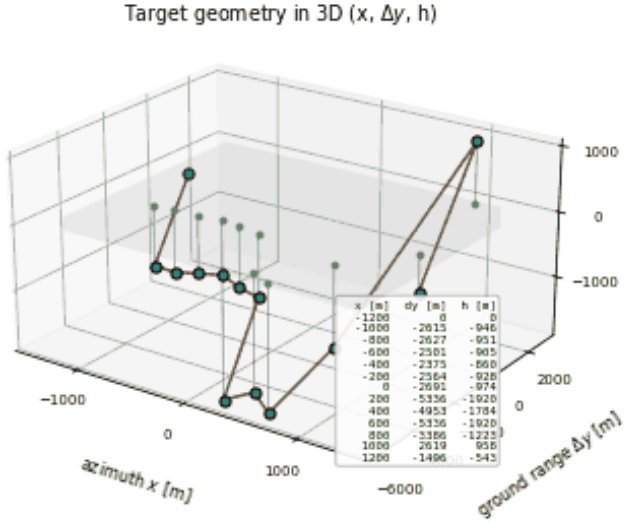


PW-NS-001 | SATA 1D | piecewise ramp: N = 5, random slopes over 20-m steps, seed 0, targets 2.6 km apart (normal distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

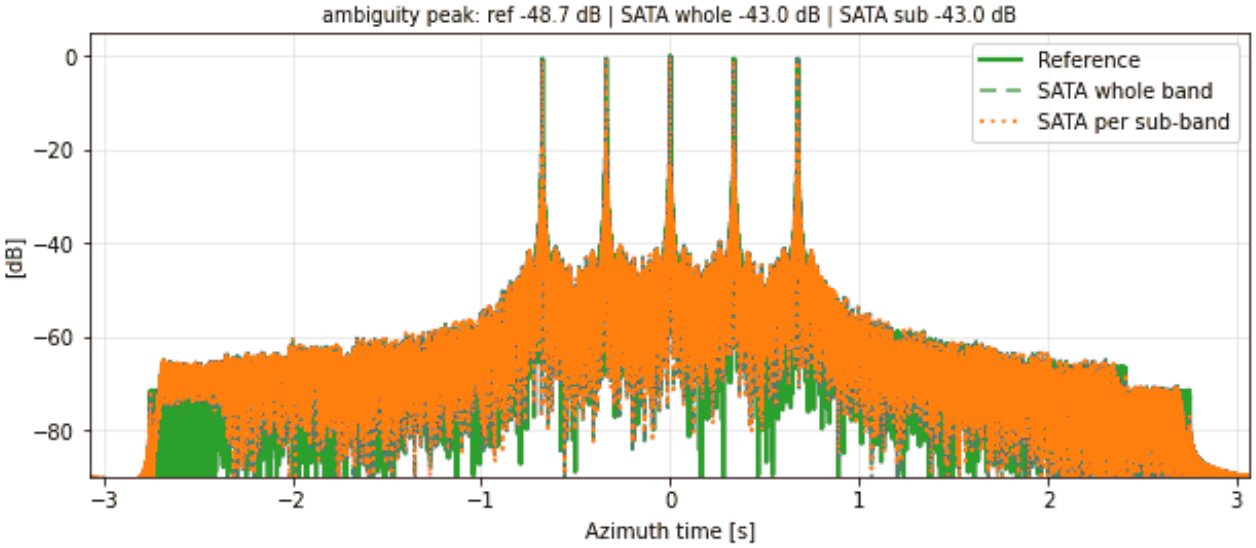


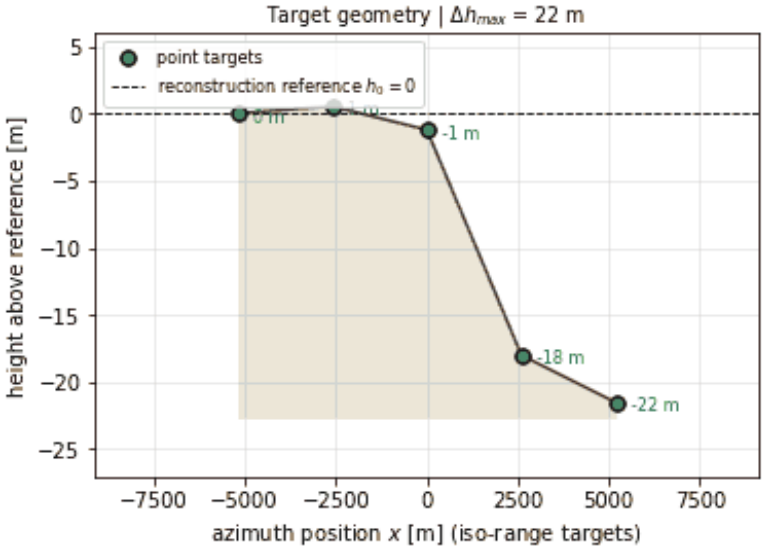


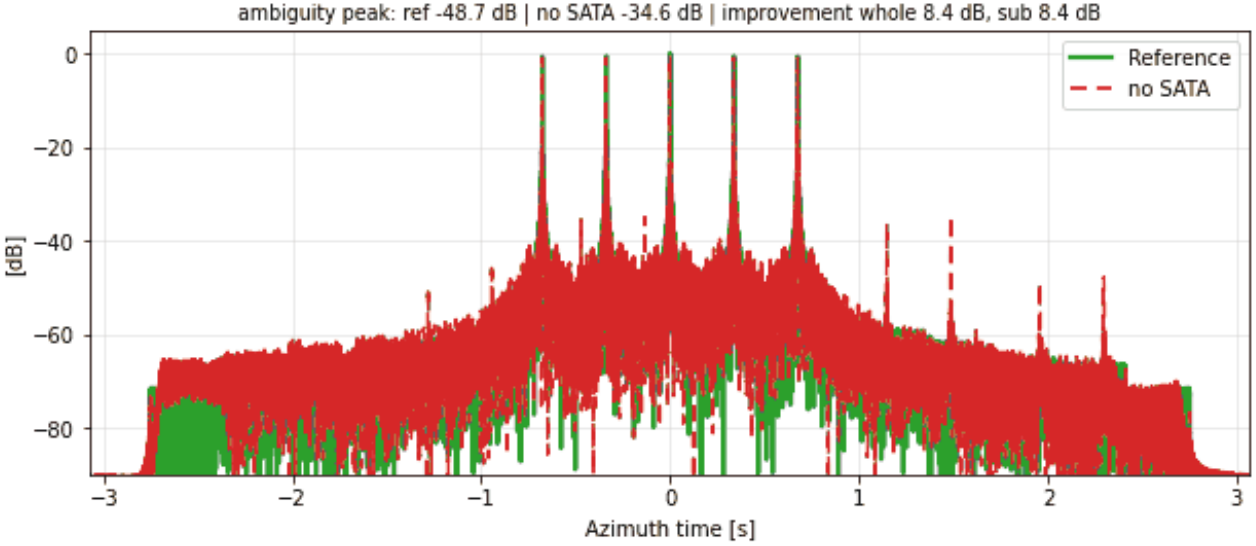


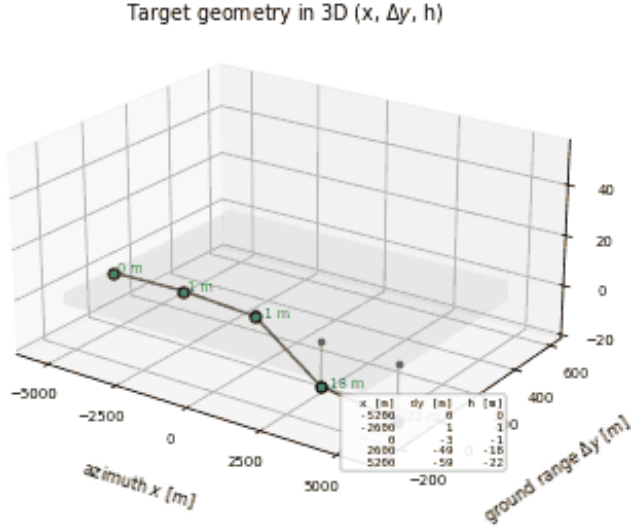


PW-NS-002 | SATA 1D | piecewise ramp: N = 5, random slopes over 20-m steps, seed 1, targets 2.6 km apart (normal distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

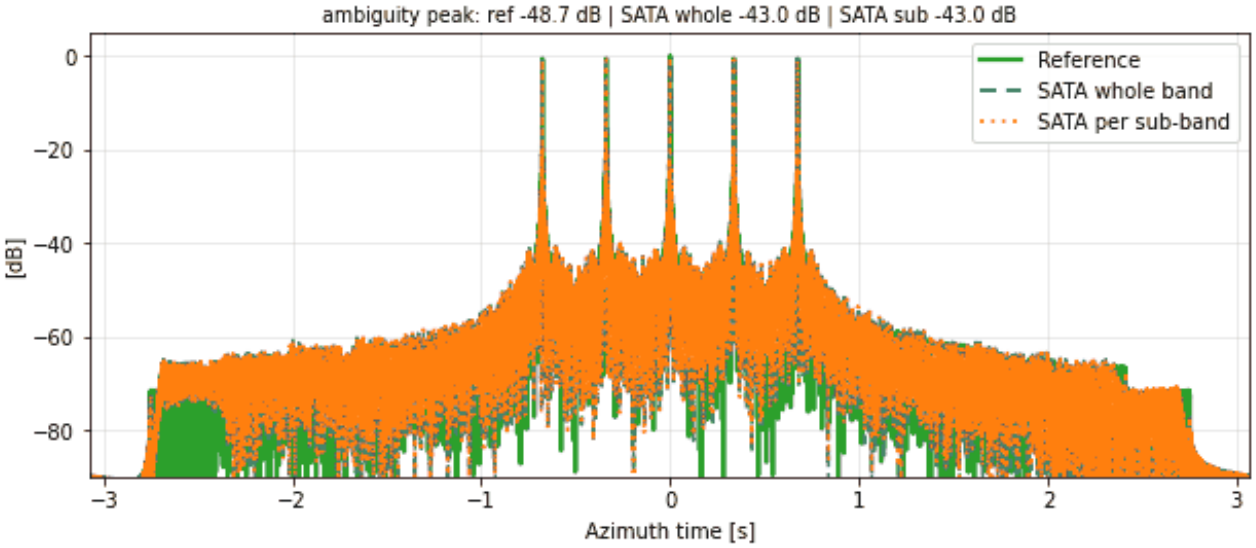


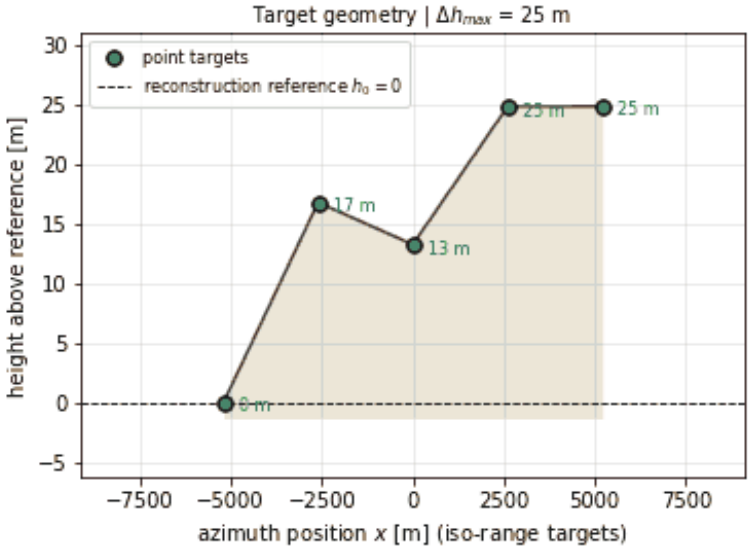


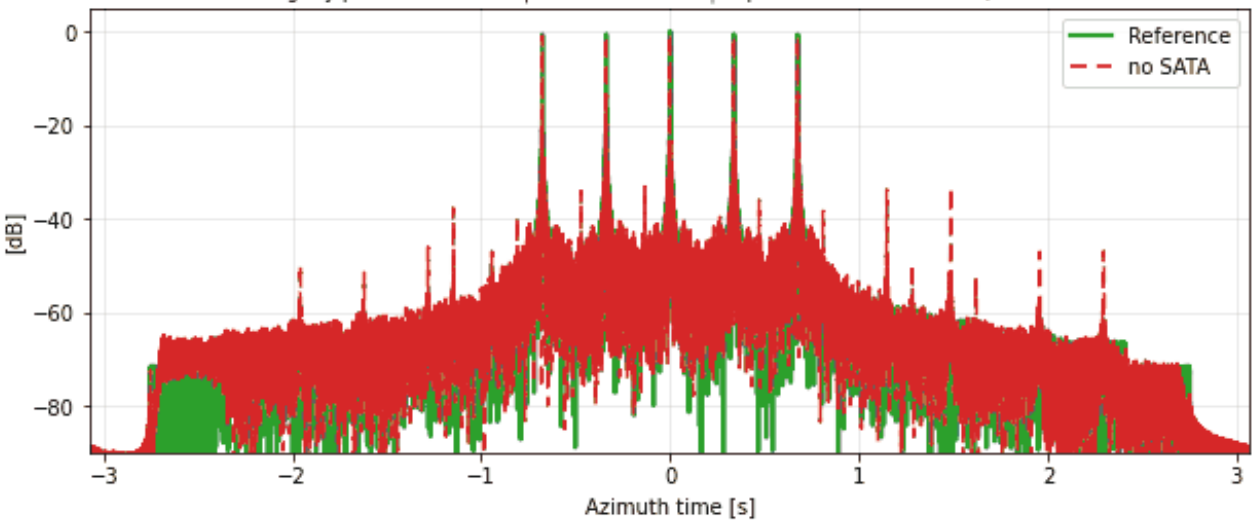


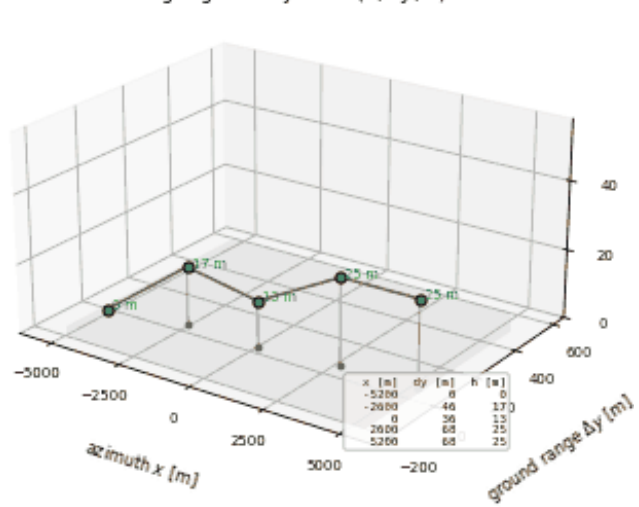


PW-NS-003 | SATA 1D | piecewise ramp: N = 5, random slopes over 20-m steps, seed 2, targets 2.6 km apart (normal distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

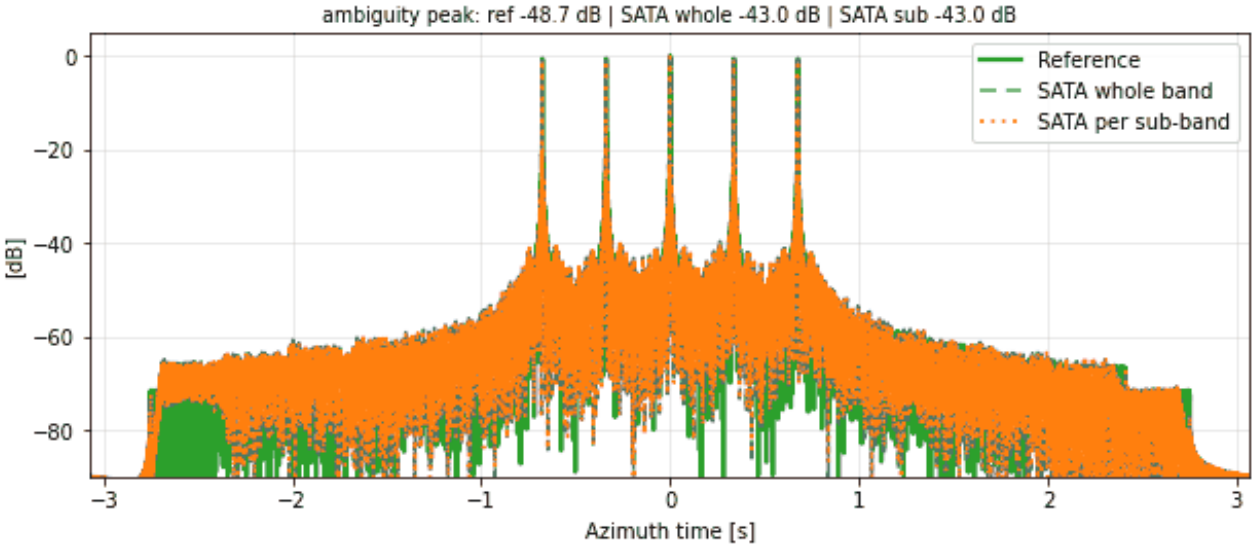


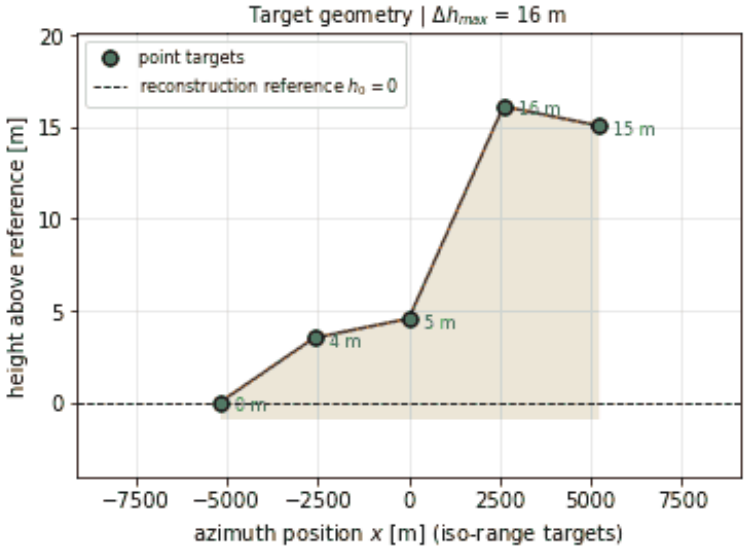


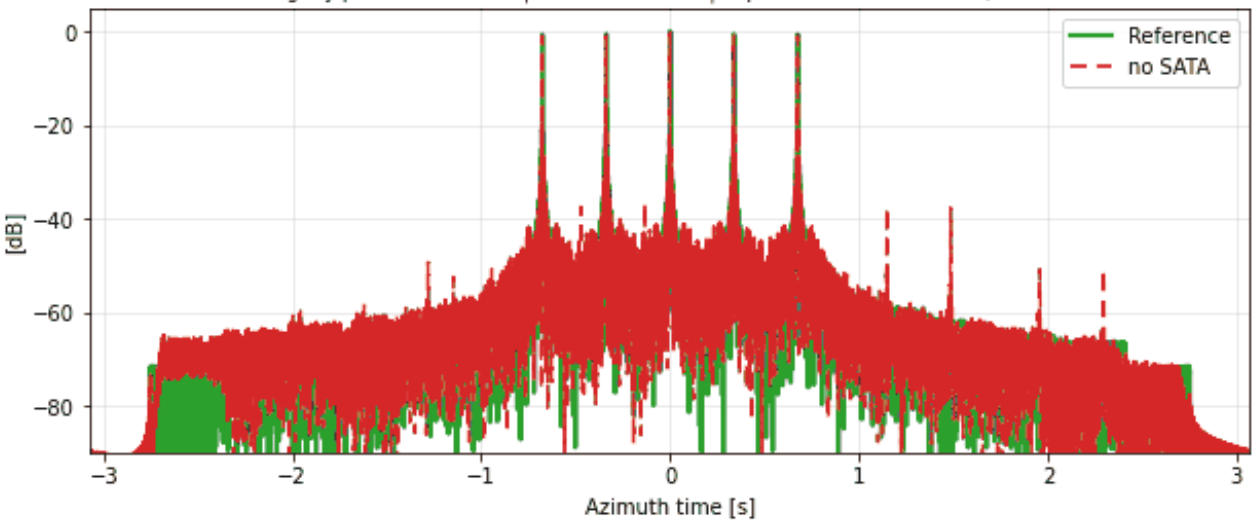


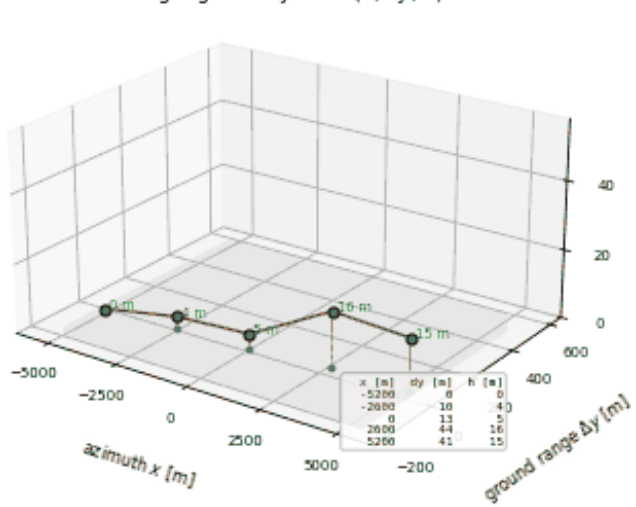


PW-NS-004 | SATA 1D | piecewise ramp: N = 5, random slopes over 20-m steps, seed 3, targets 2.6 km apart (normal distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

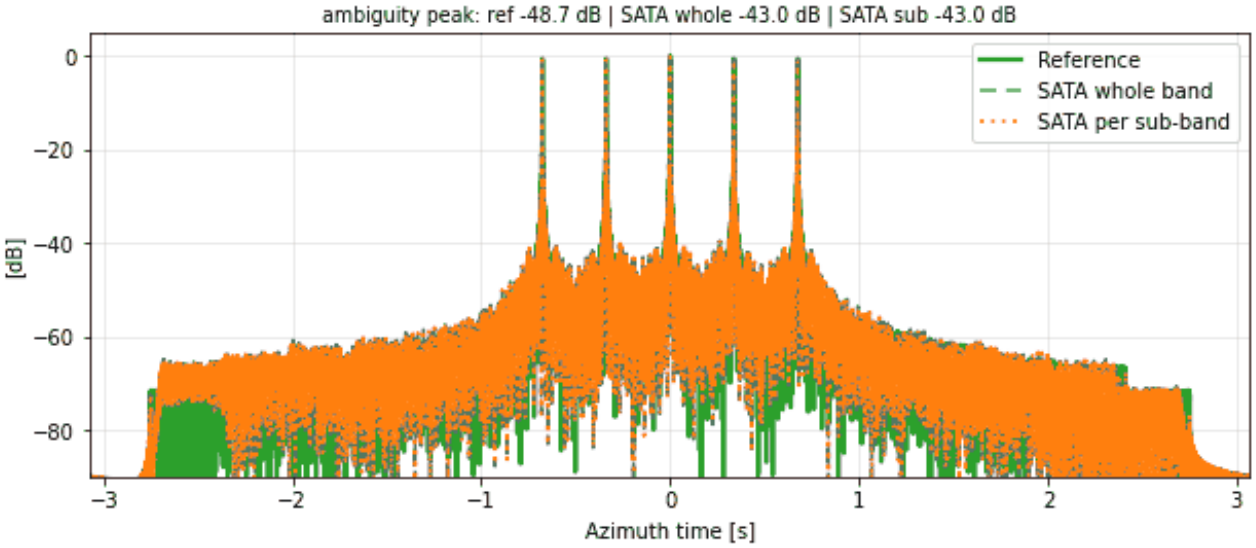


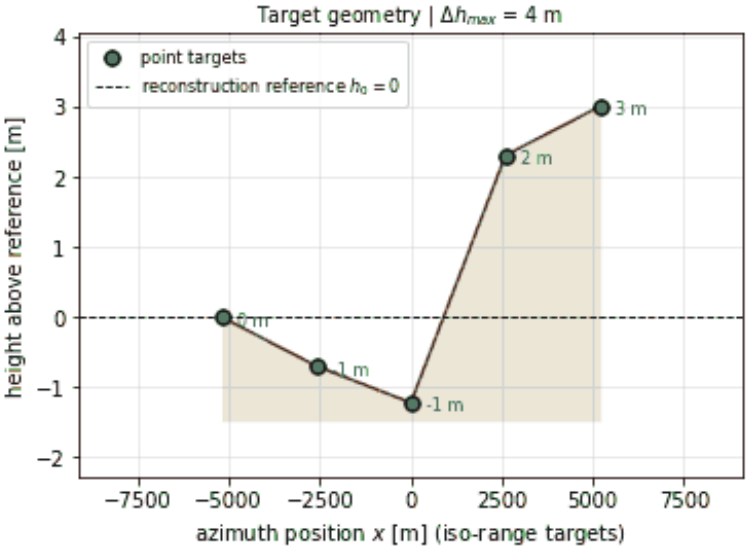


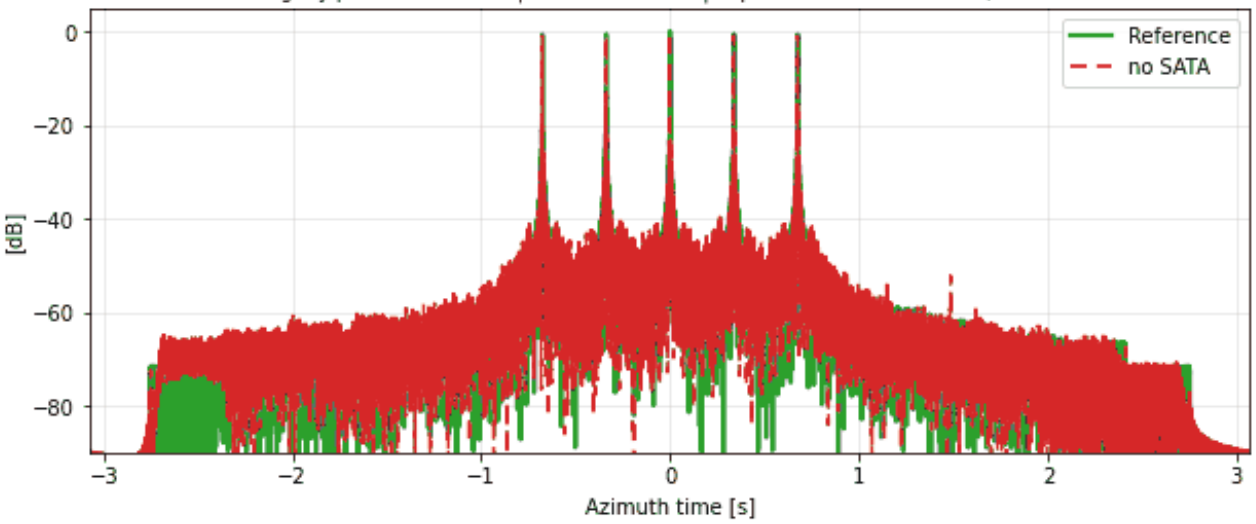

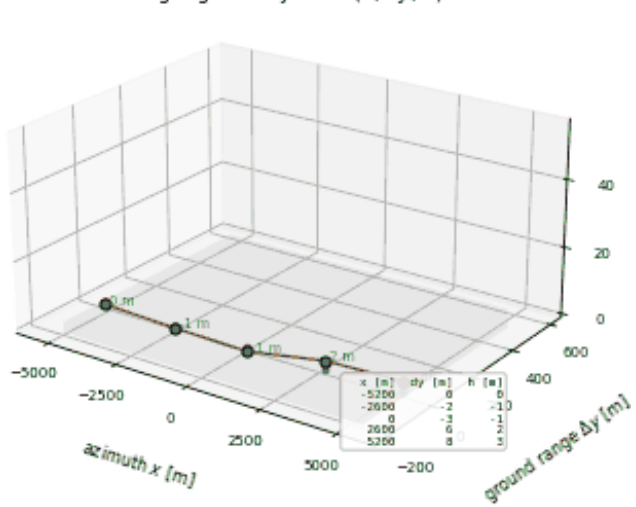


PW-NS-005 | SATA 1D | piecewise ramp: N = 5, random slopes over 20-m steps, seed 4, targets 2.6 km apart (normal distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

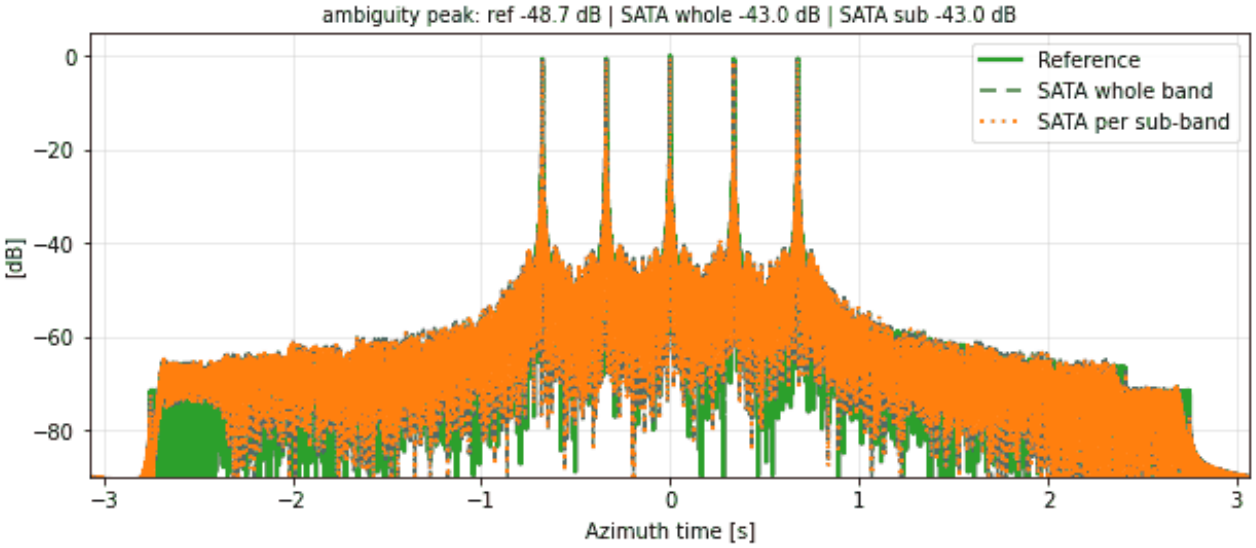


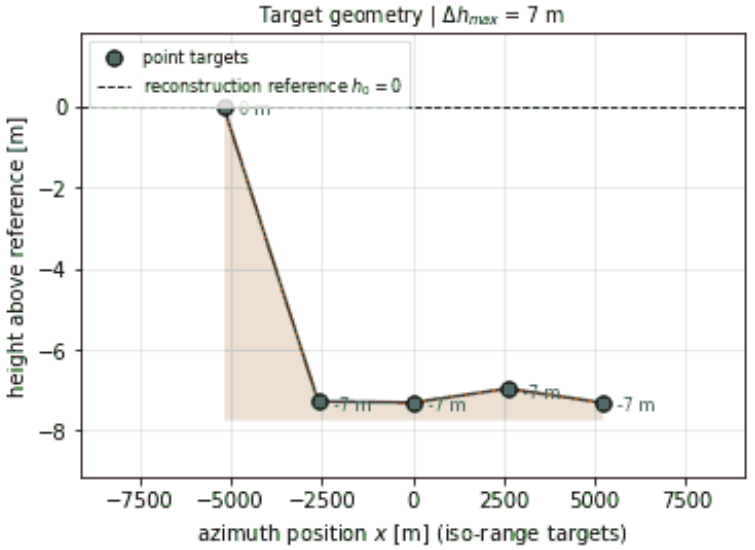




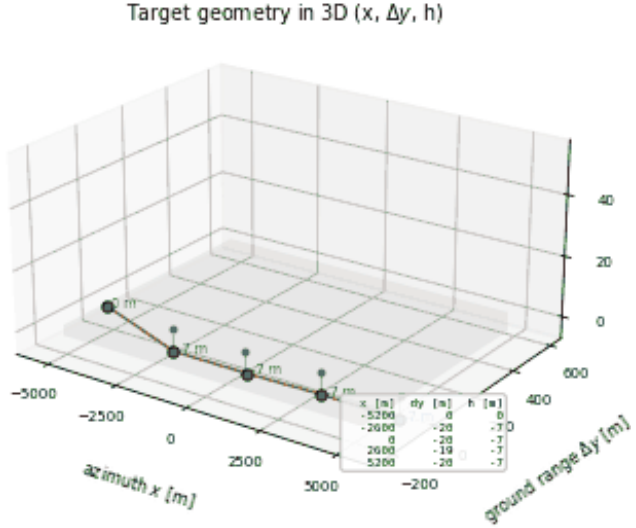


PW-NN-001 | SATA 1D | piecewise ramp: N = 5, random slopes over 200-m steps, seed 0, targets 2.6 km apart (normal distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

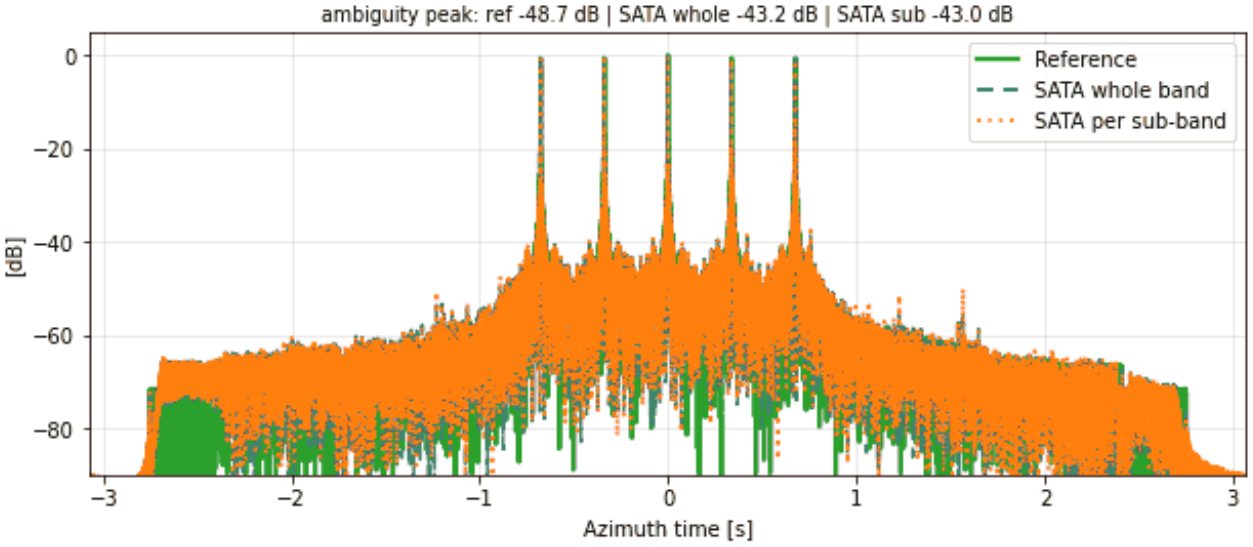


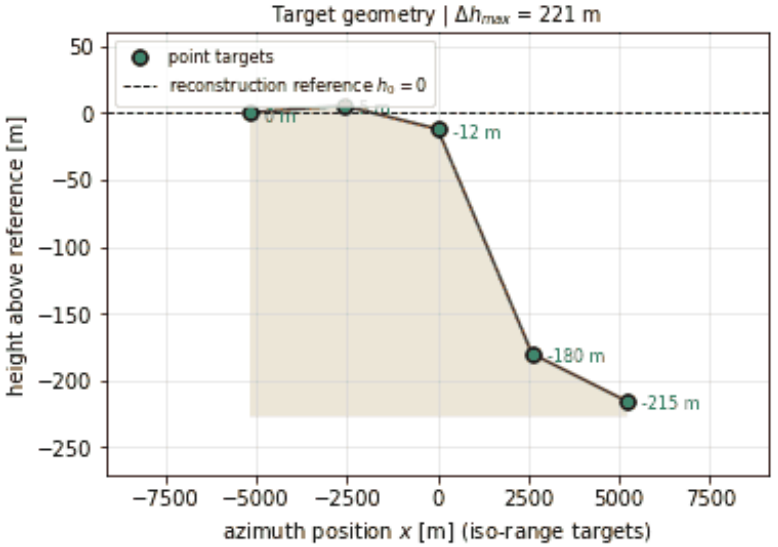




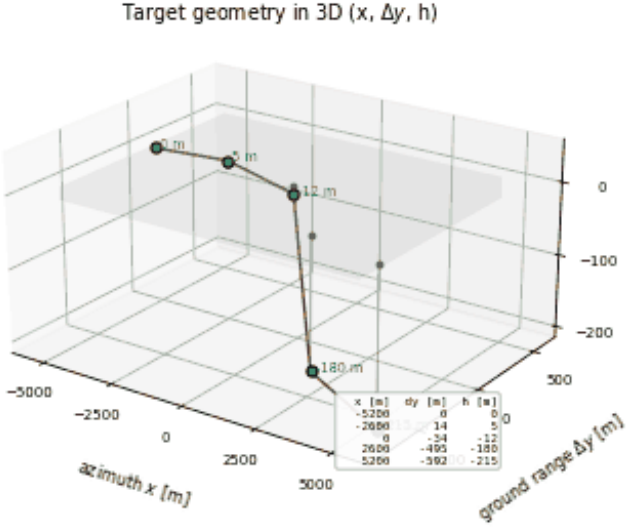


PW-NN-002 | SATA 1D | piecewise ramp: N = 5, random slopes over 200-m steps, seed 1, targets 2.6 km apart (normal distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

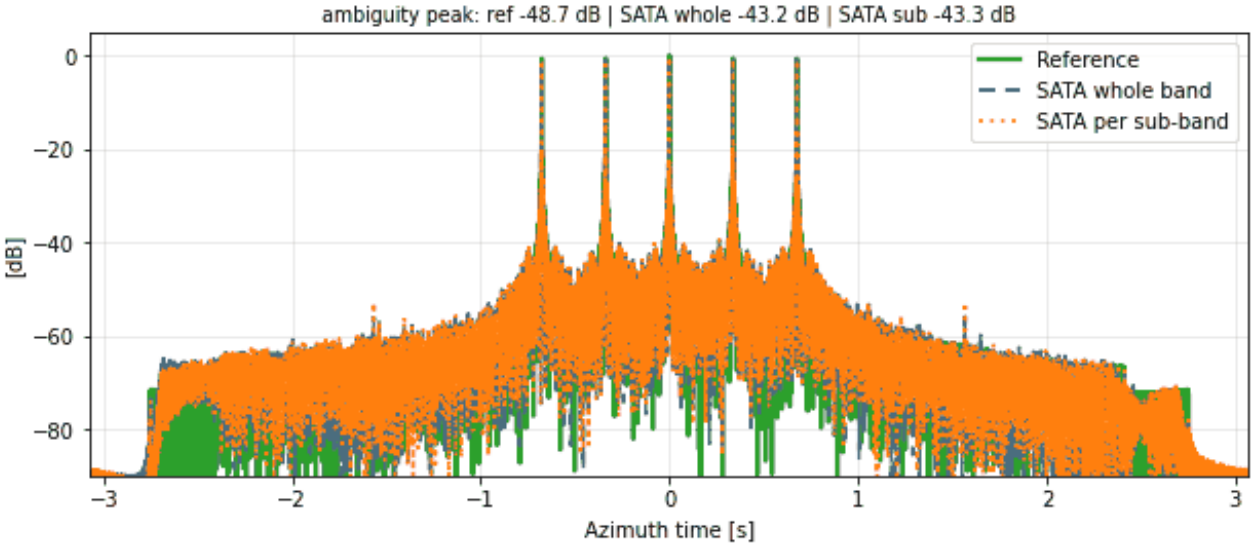


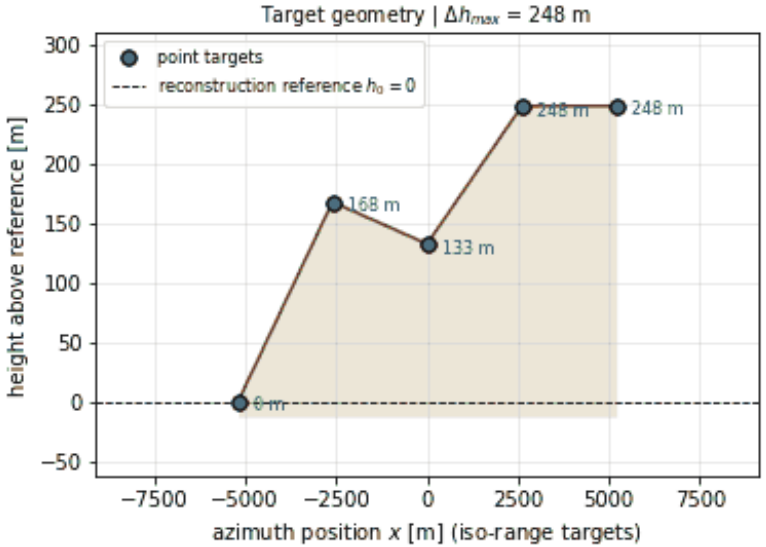





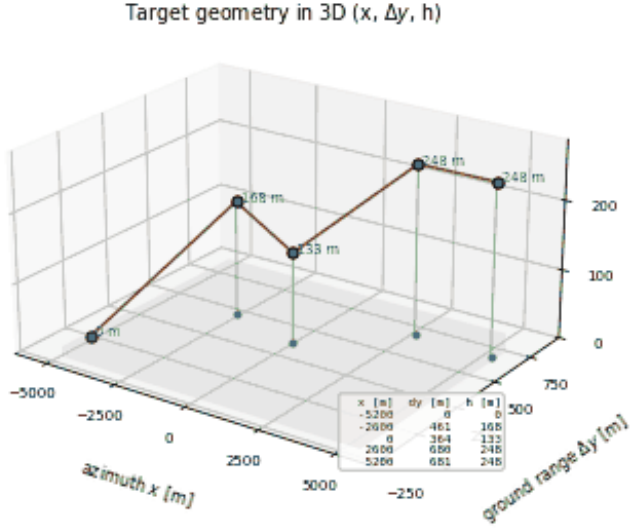


PW-NN-003 | SATA 1D | piecewise ramp: N = 5, random slopes over 200-m steps, seed 2, targets 2.6 km apart (normal distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

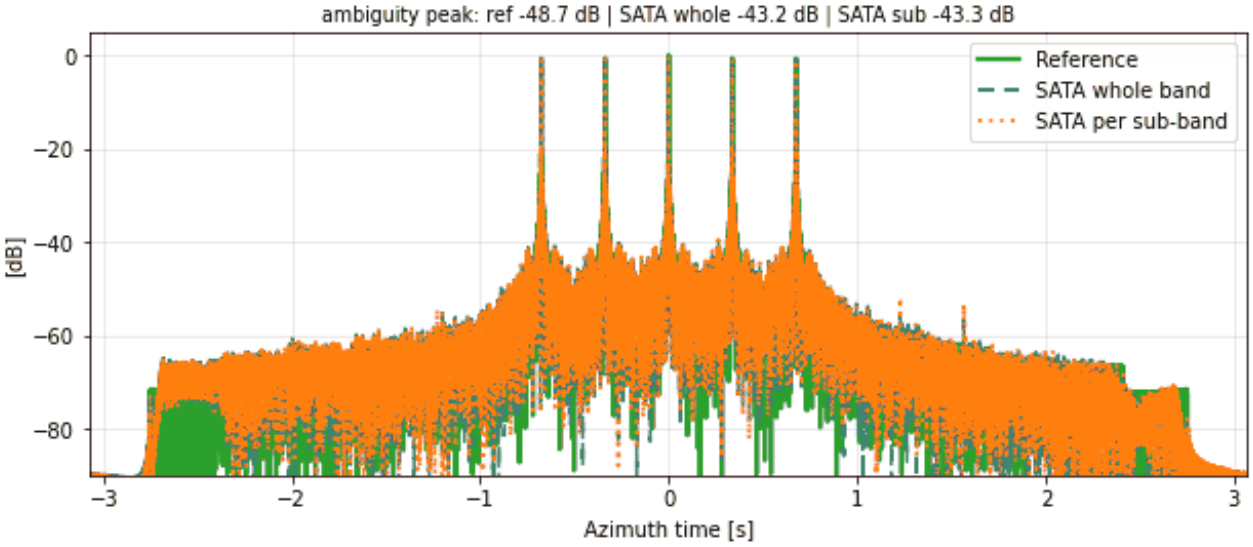


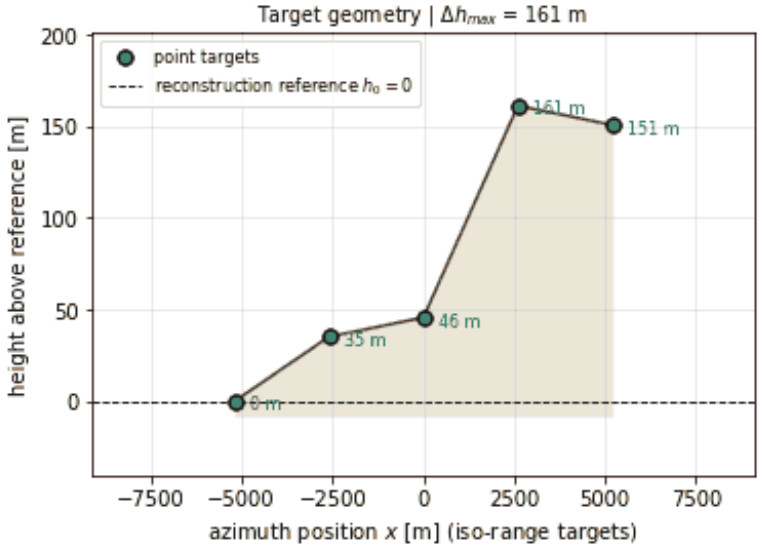


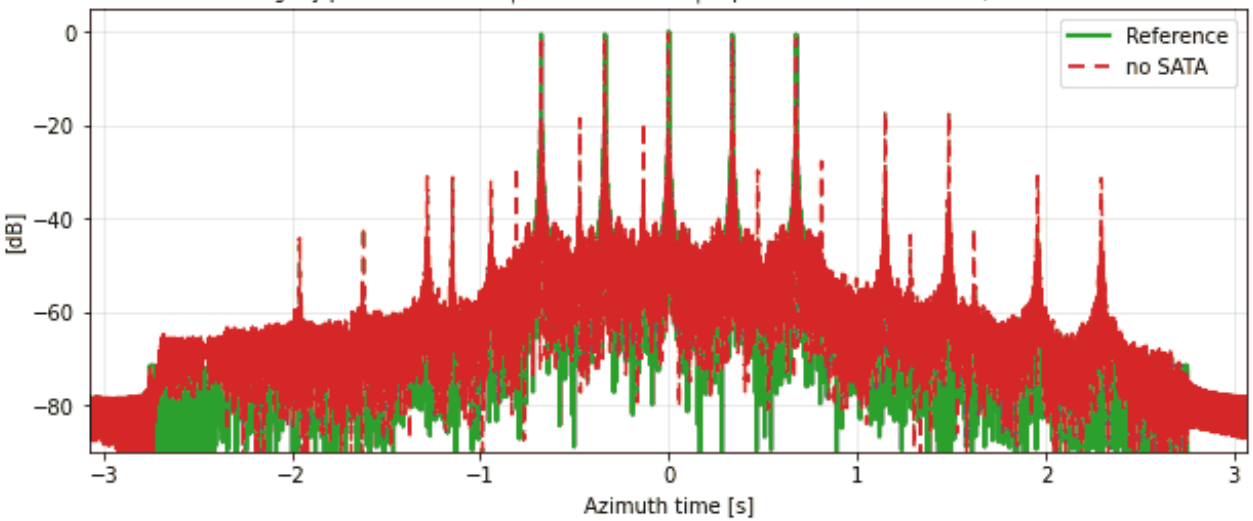


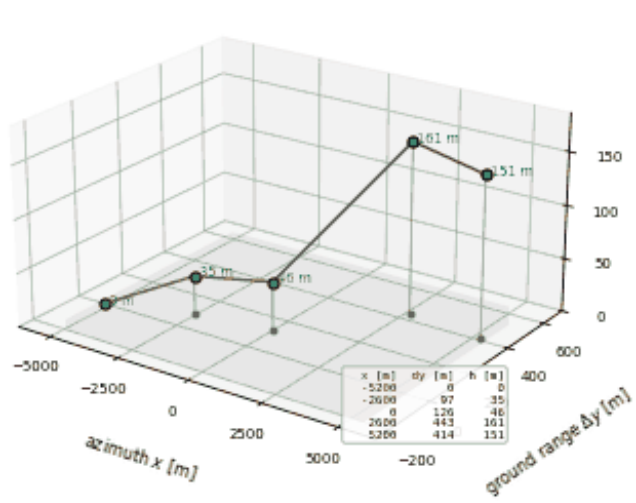


PW-NN-004 | SATA 1D | piecewise ramp: N = 5, random slopes over 200-m steps, seed 3, targets 2.6 km apart (normal distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

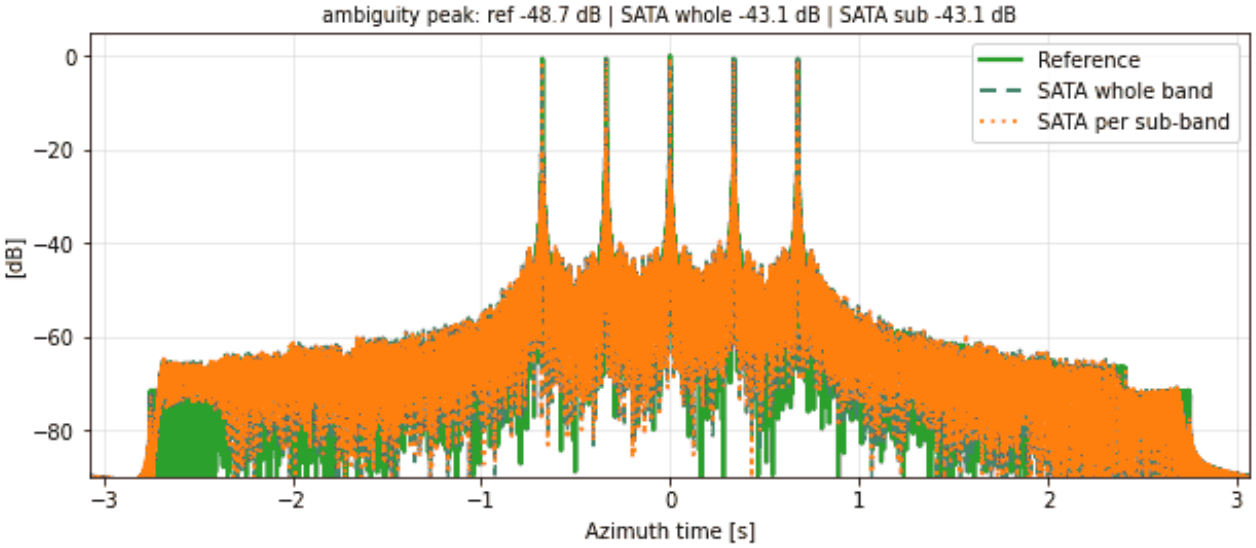


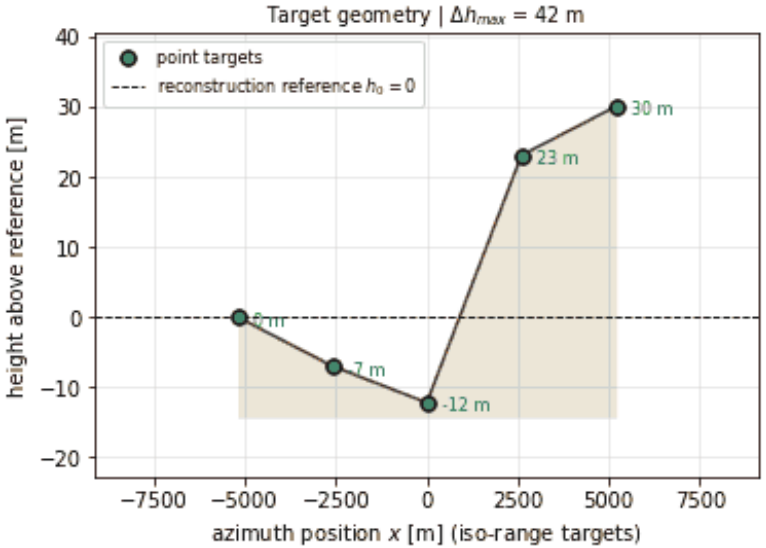


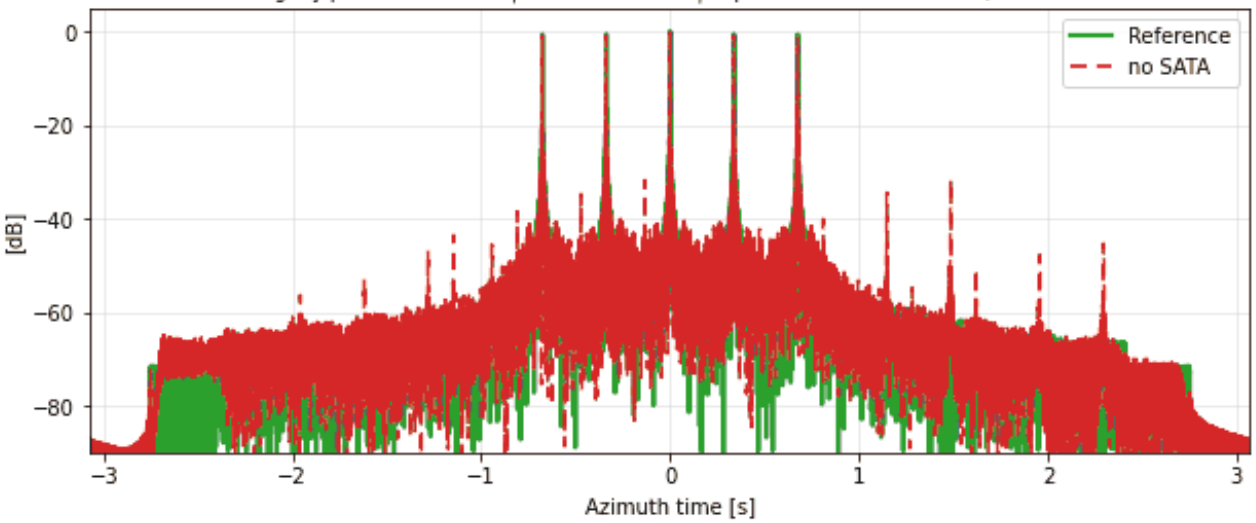


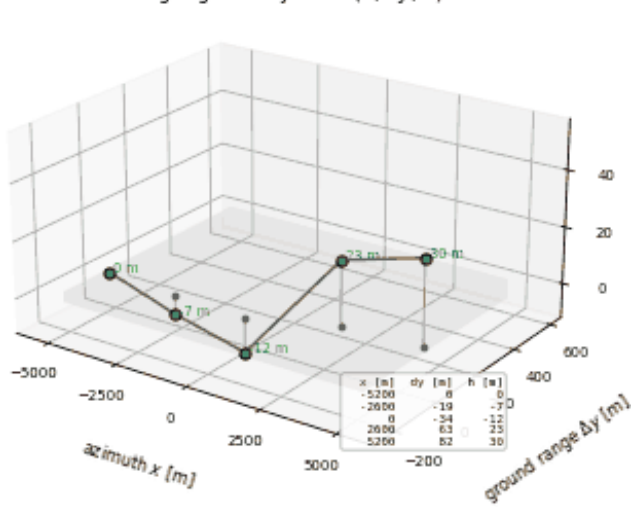


PW-NN-005 | SATA 1D | piecewise ramp: N = 5, random slopes over 200-m steps, seed 4, targets 2.6 km apart (normal distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

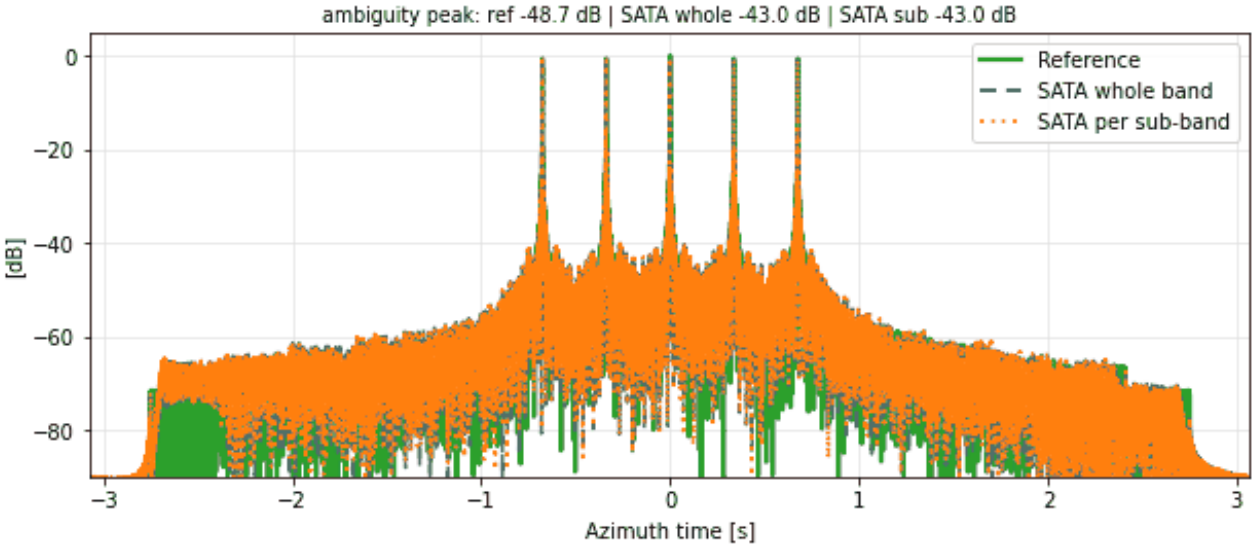


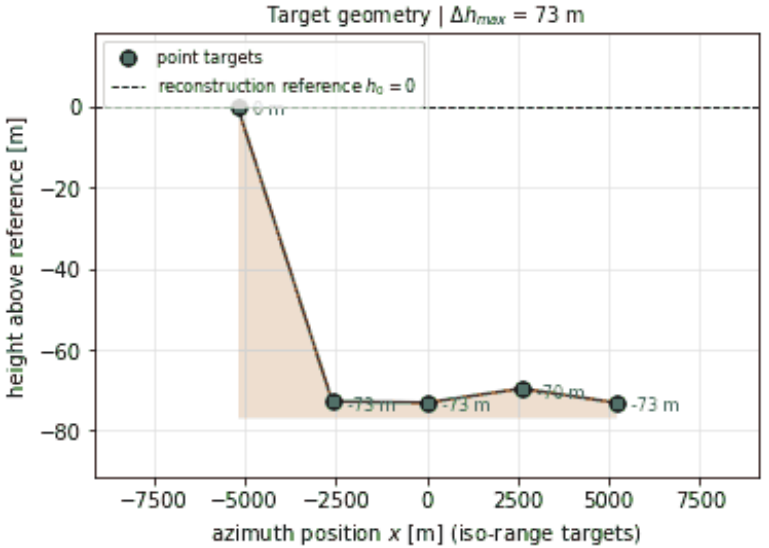


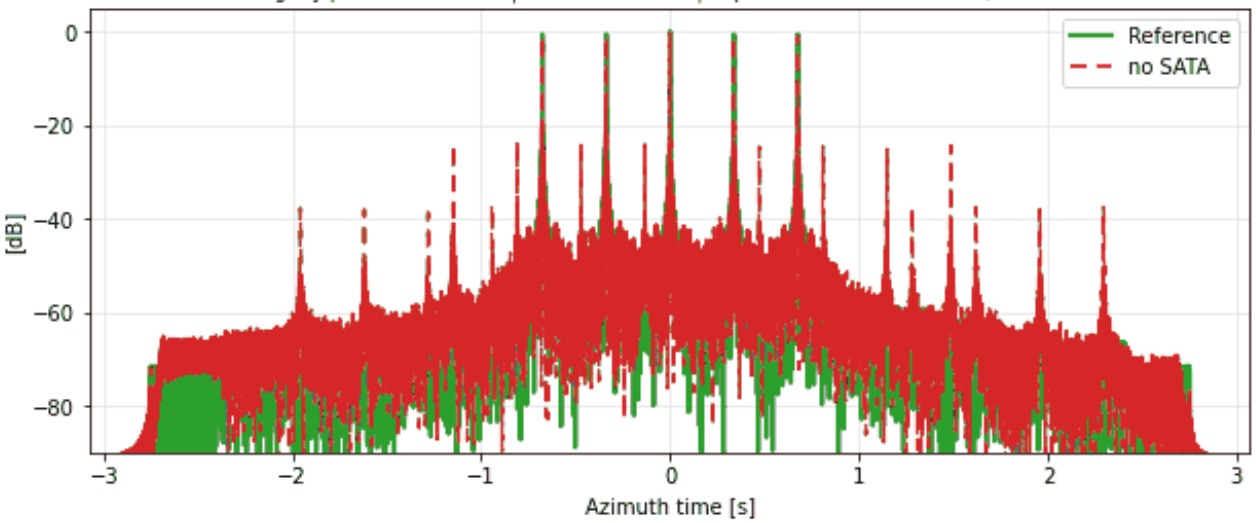


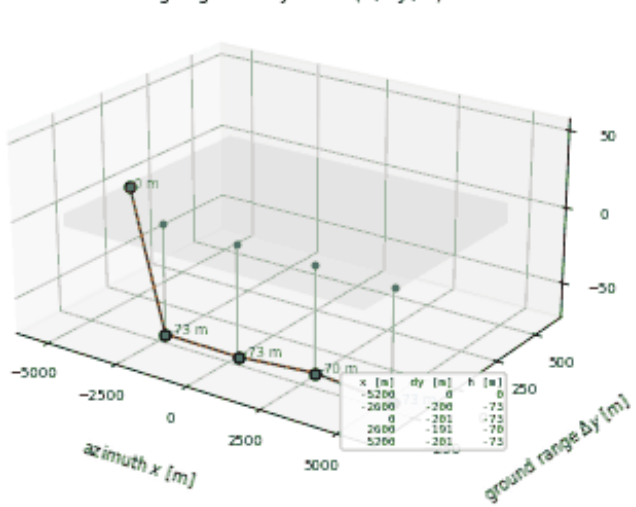


PW-NL-001 | SATA 1D | piecewise ramp: N = 5, random slopes over 2600-m steps, seed 0, targets 2.6 km apart (normal distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

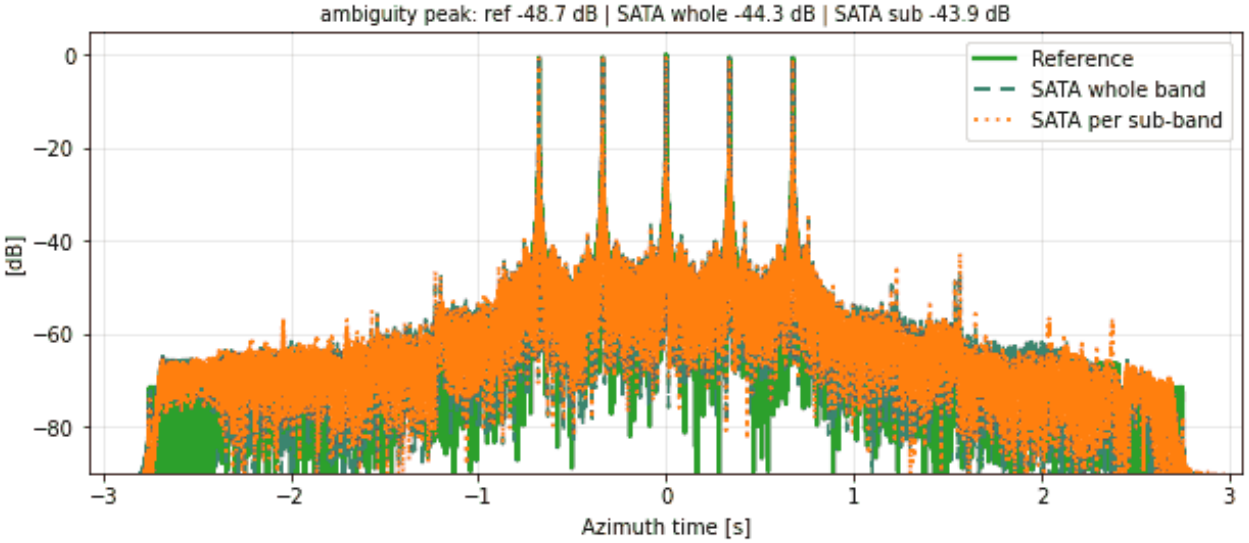


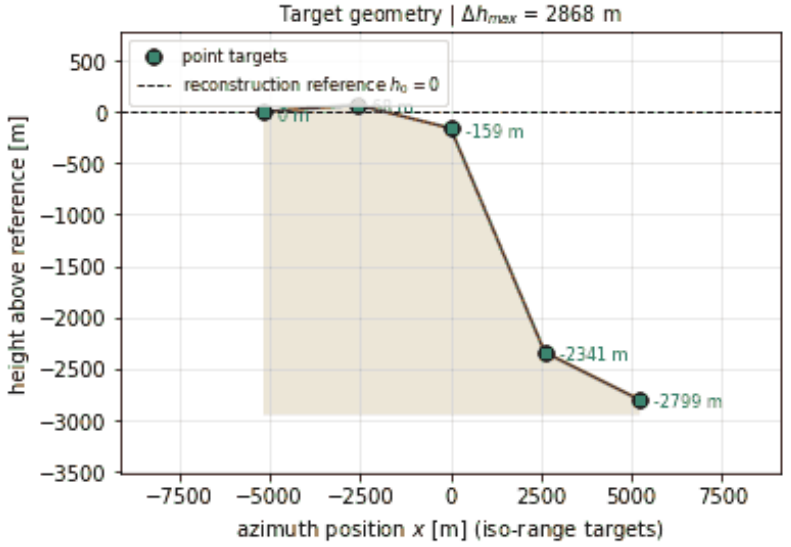


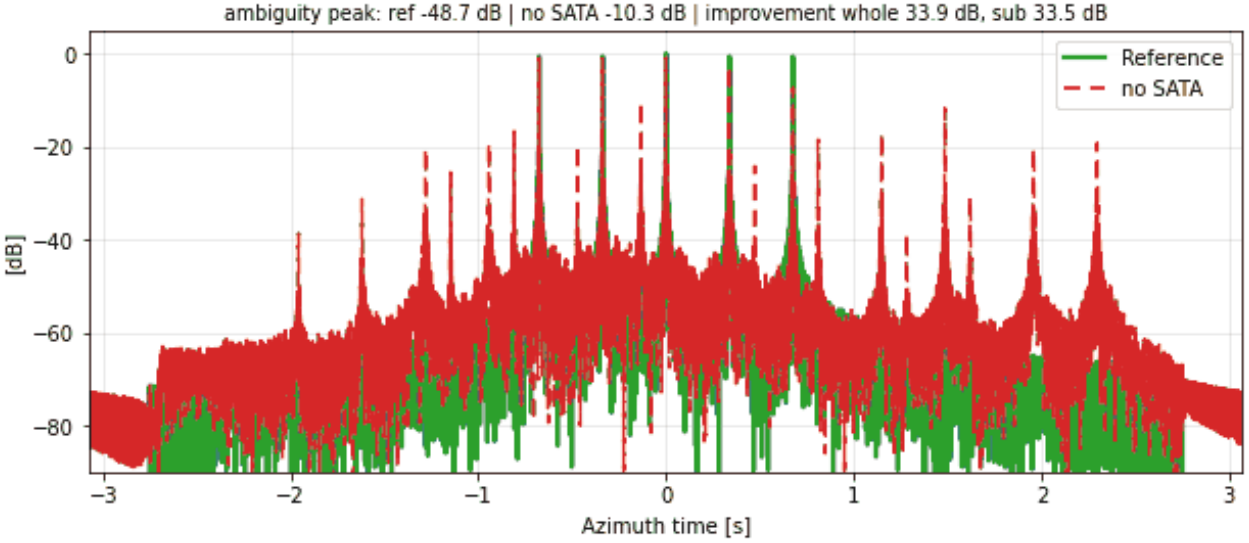


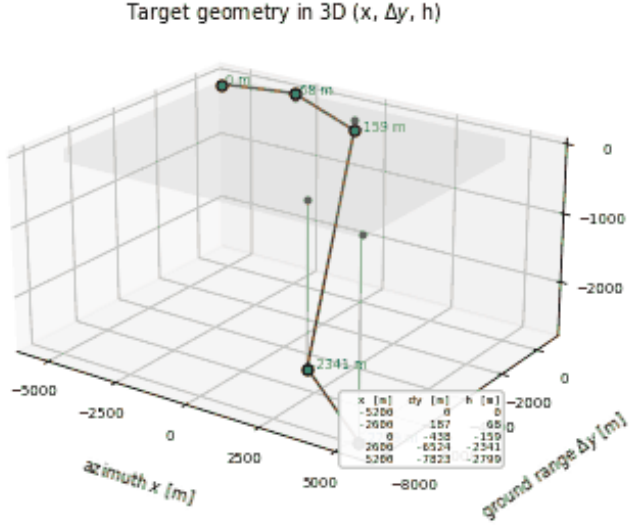


PW-NL-002 | SATA 1D | piecewise ramp: N = 5, random slopes over 2600-m steps, seed 1, targets 2.6 km apart (normal distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

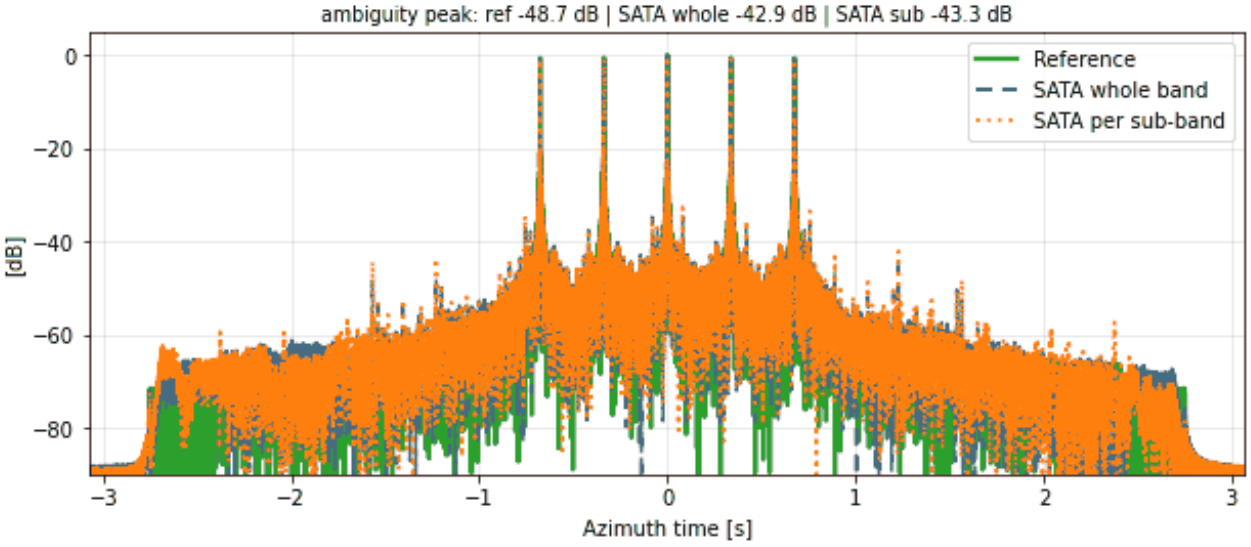


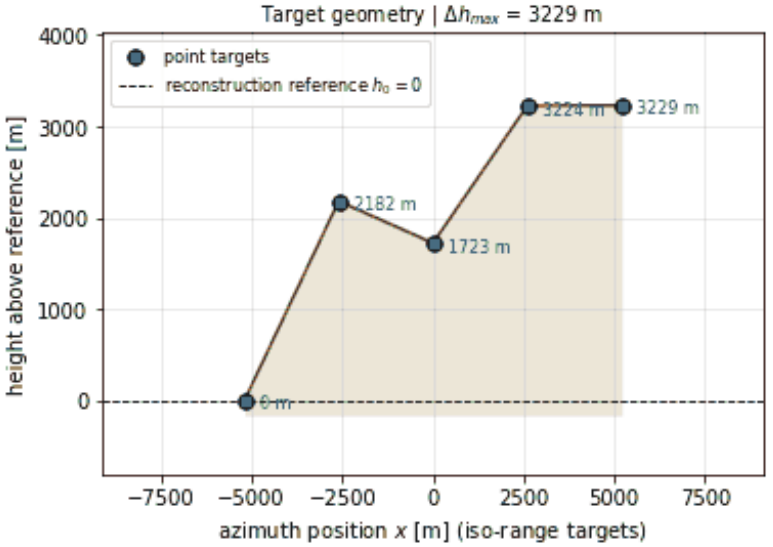


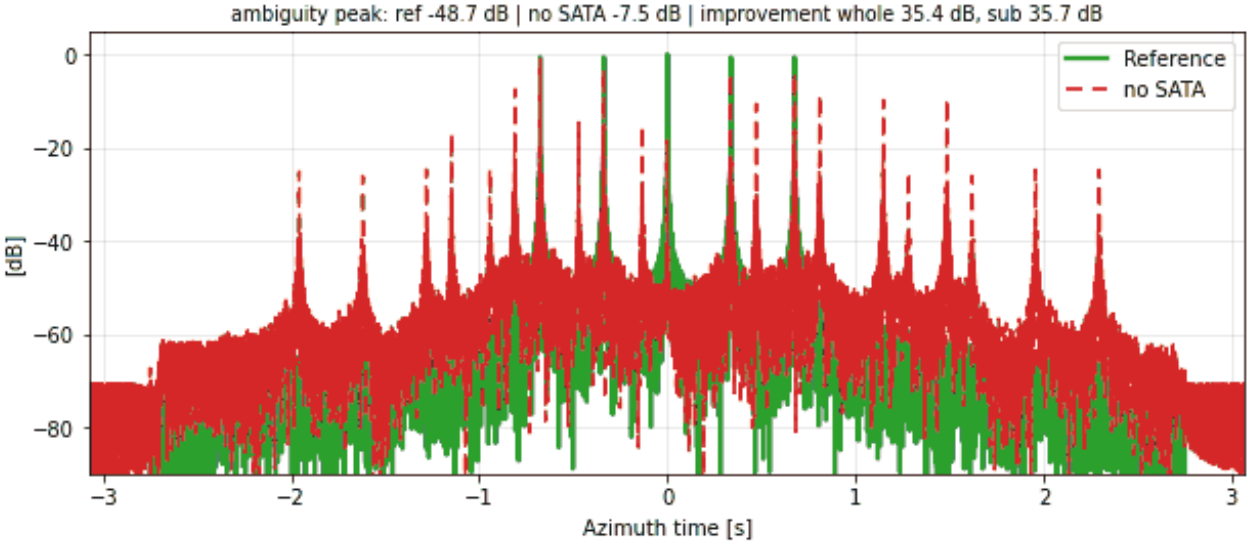


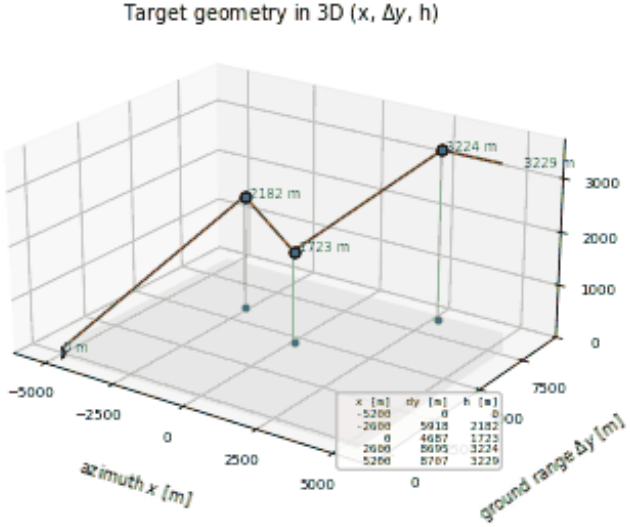


PW-NL-003 | SATA 1D | piecewise ramp: N = 5, random slopes over 2600-m steps, seed 2, targets 2.6 km apart (normal distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

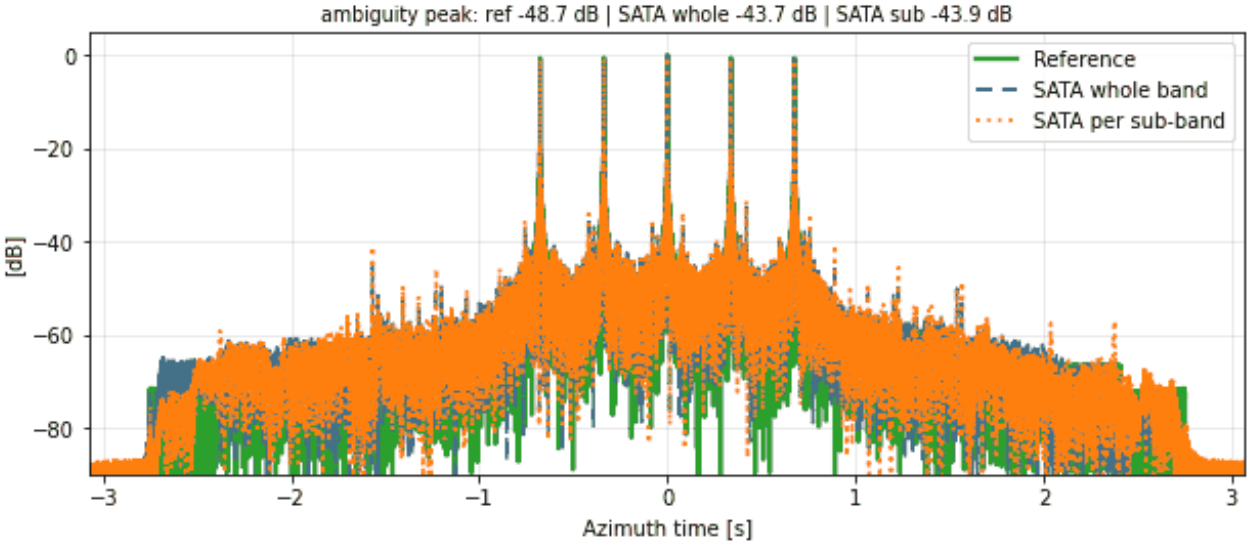


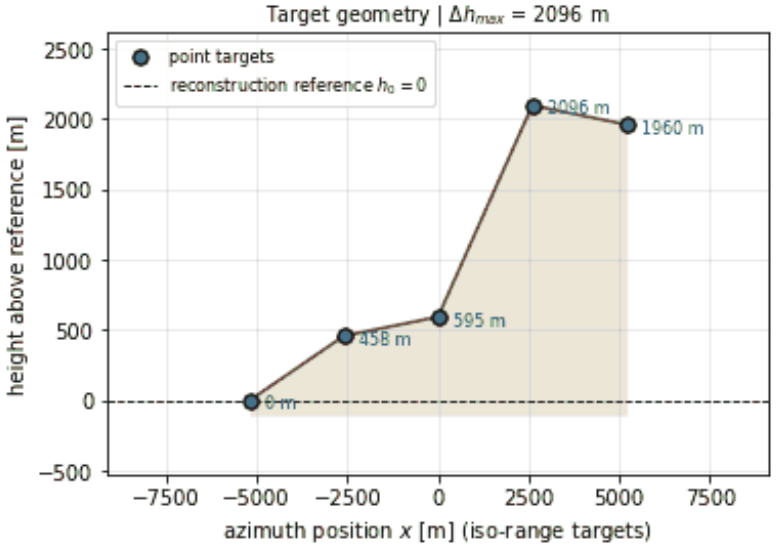


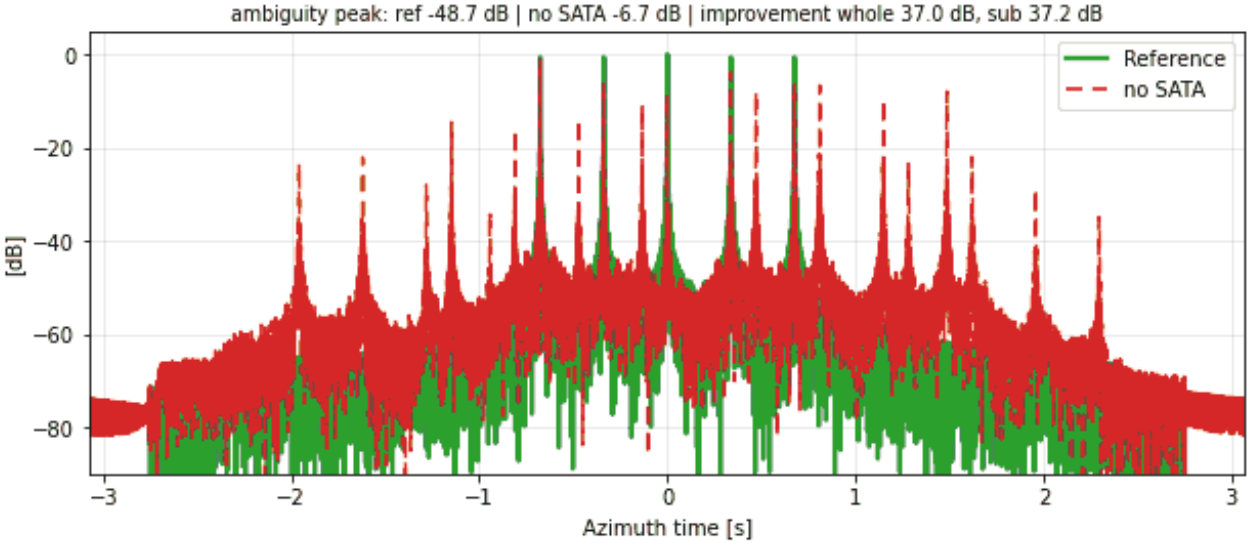


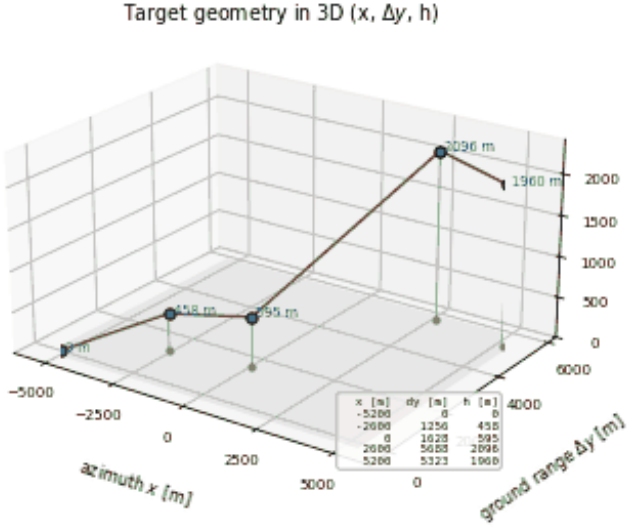


PW-NL-004 | SATA 1D | piecewise ramp: N = 5, random slopes over 2600-m steps, seed 3, targets 2.6 km apart (normal distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

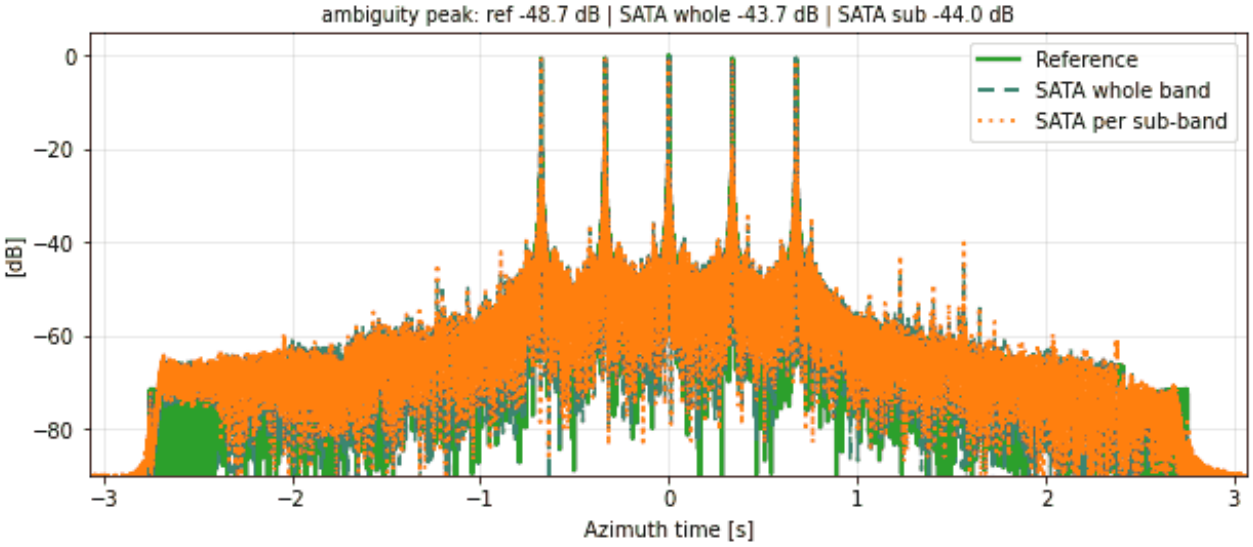


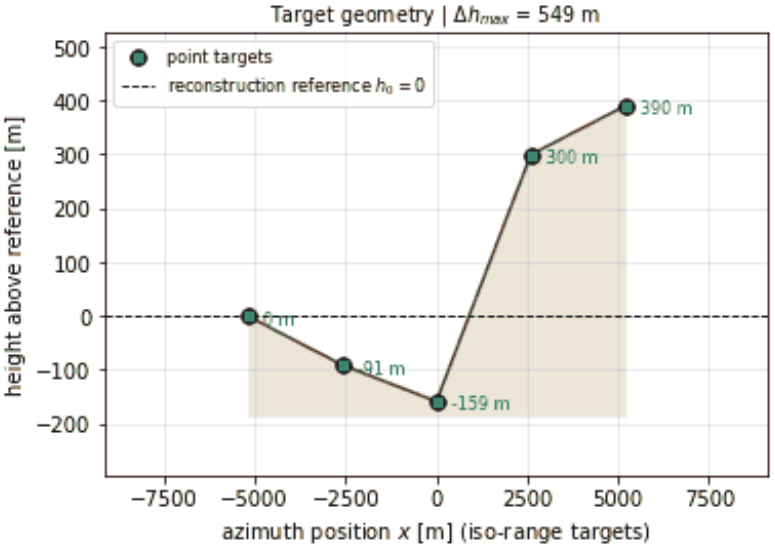


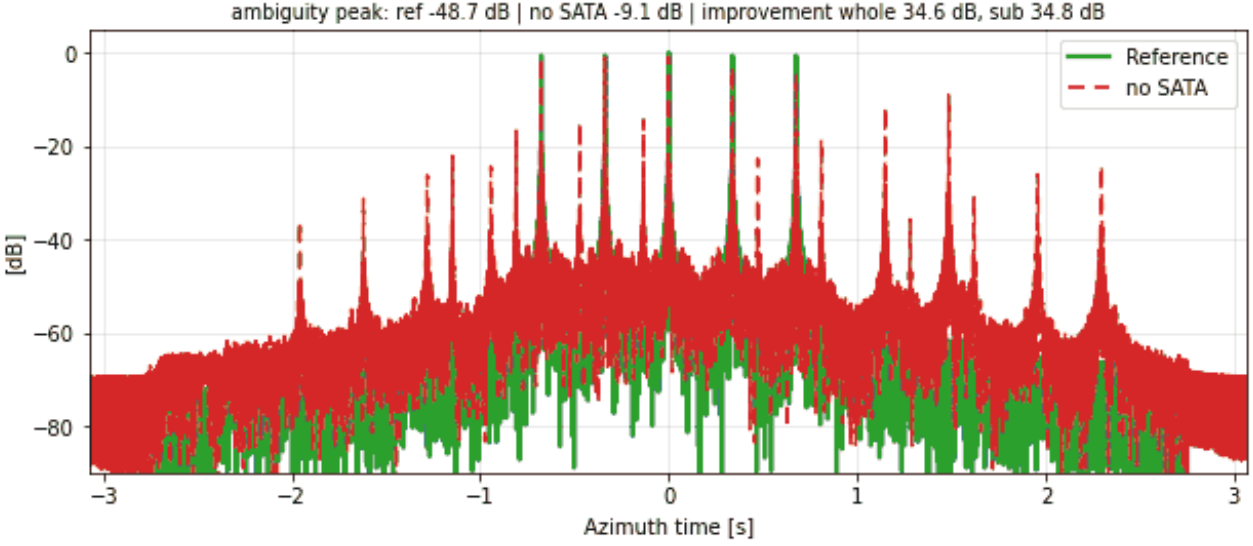


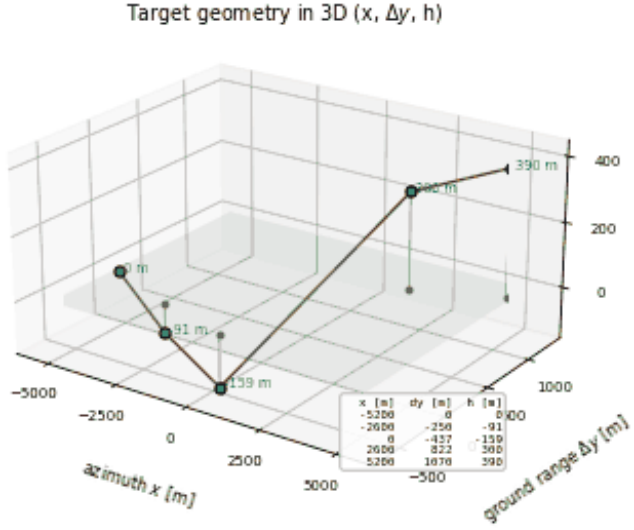


PW-NL-005 | SATA 1D | piecewise ramp: N = 5, random slopes over 2600-m steps, seed 4, targets 2.6 km apart (normal distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

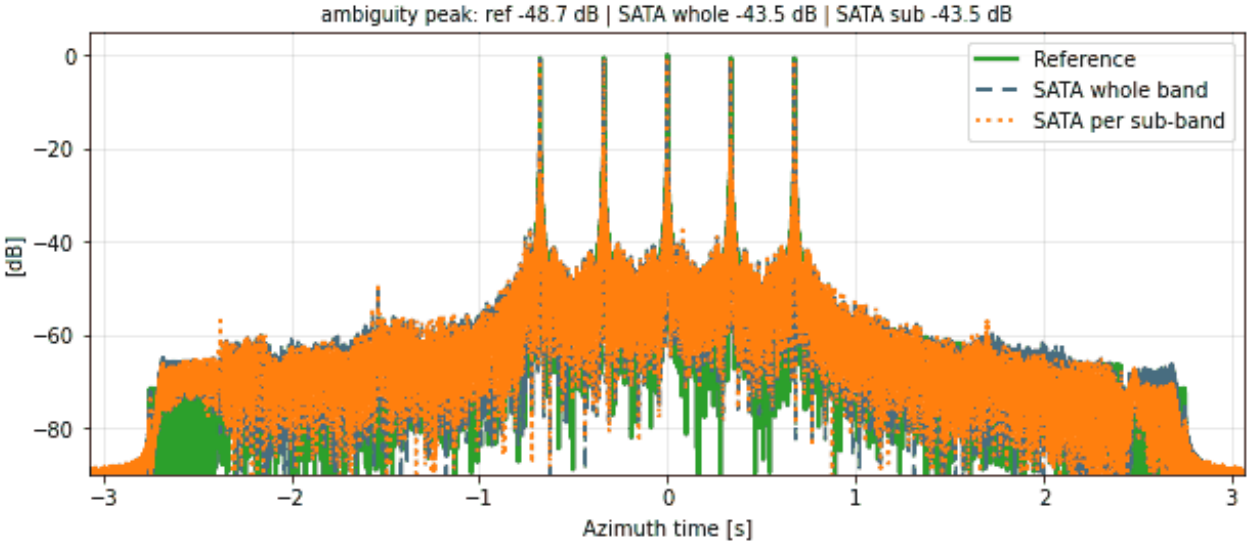


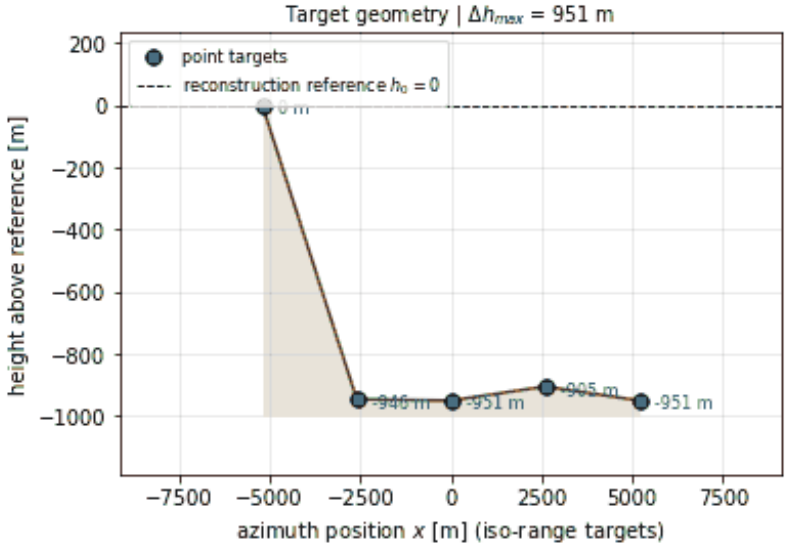


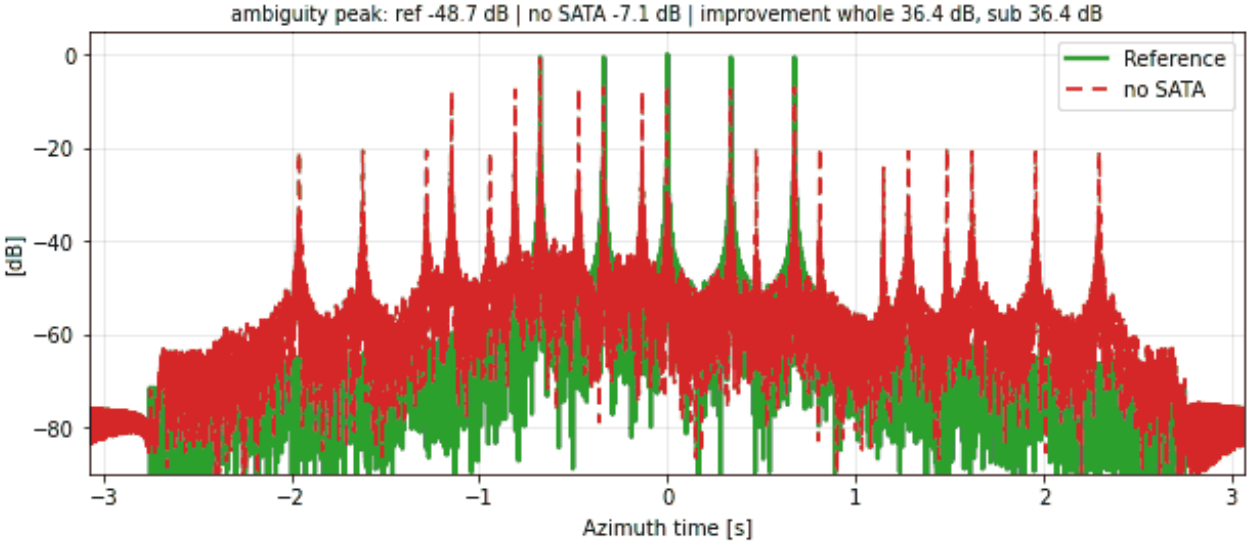


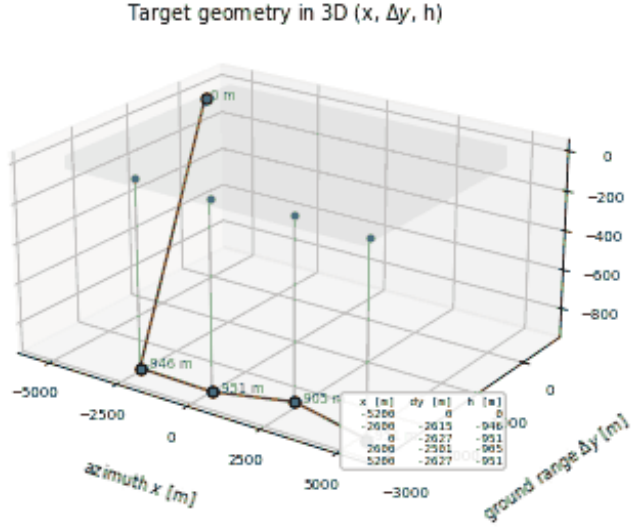


PW-LS-001 | SATA 1D | piecewise ramp: N = 5, random slopes over 20-m steps, seed 0, targets 10 km apart (large distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

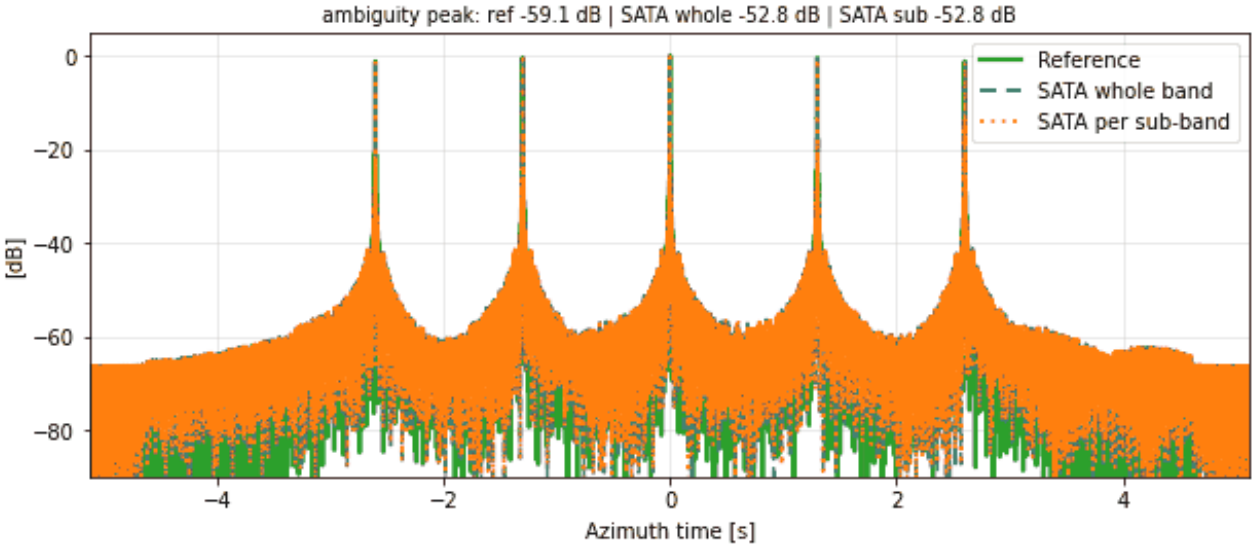


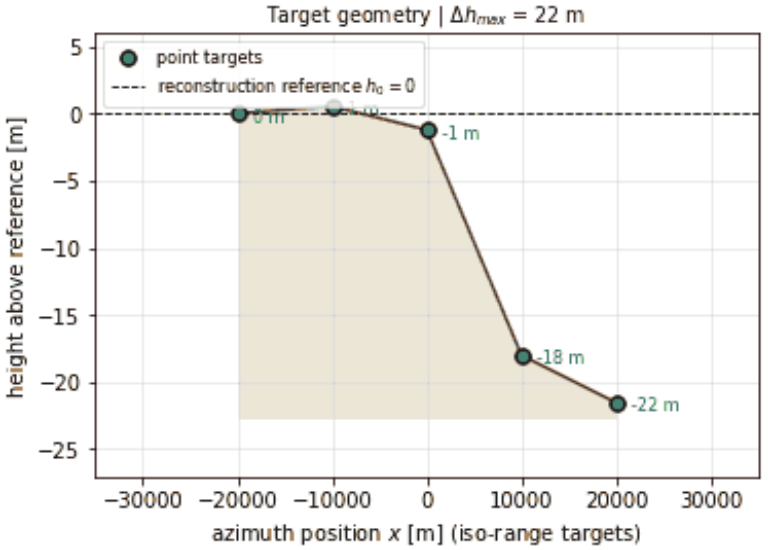


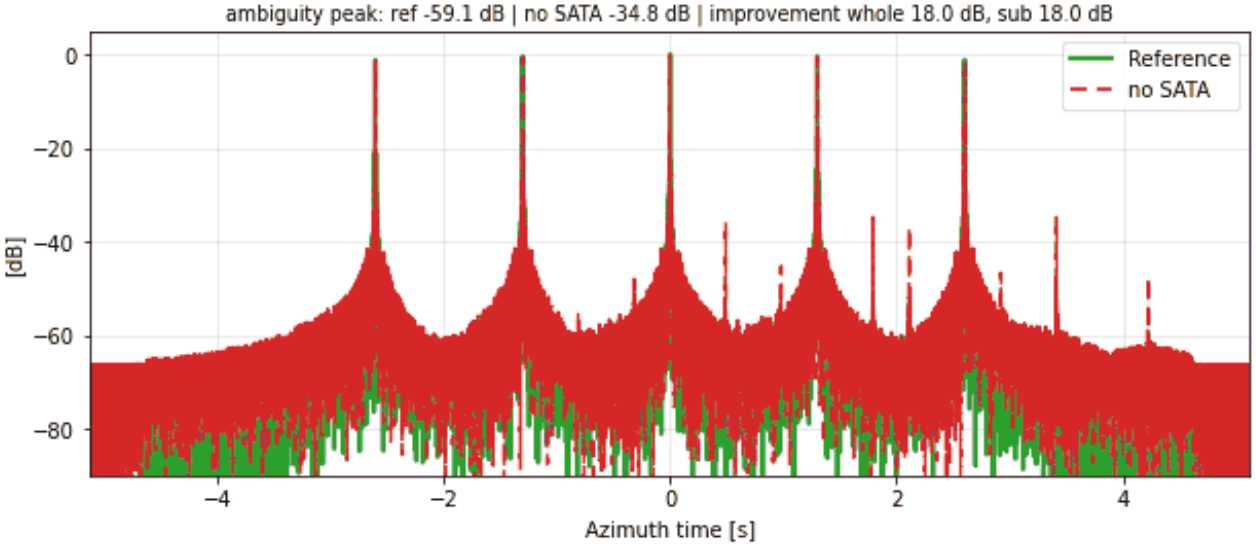


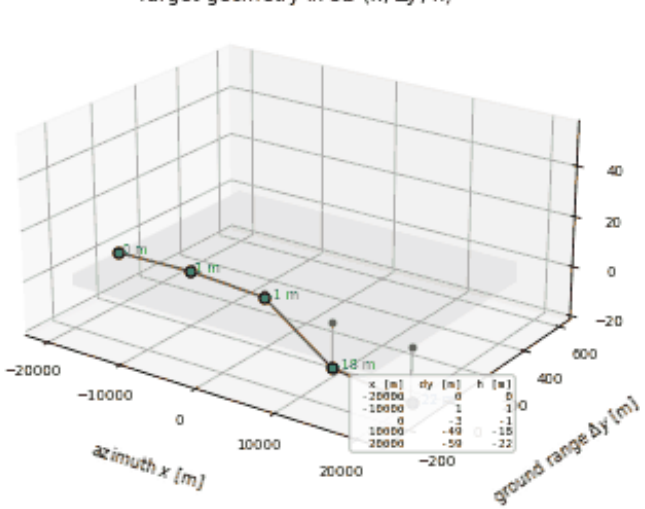


PW-LS-002 | SATA 1D | piecewise ramp: N = 5, random slopes over 20-m steps, seed 1, targets 10 km apart (large distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

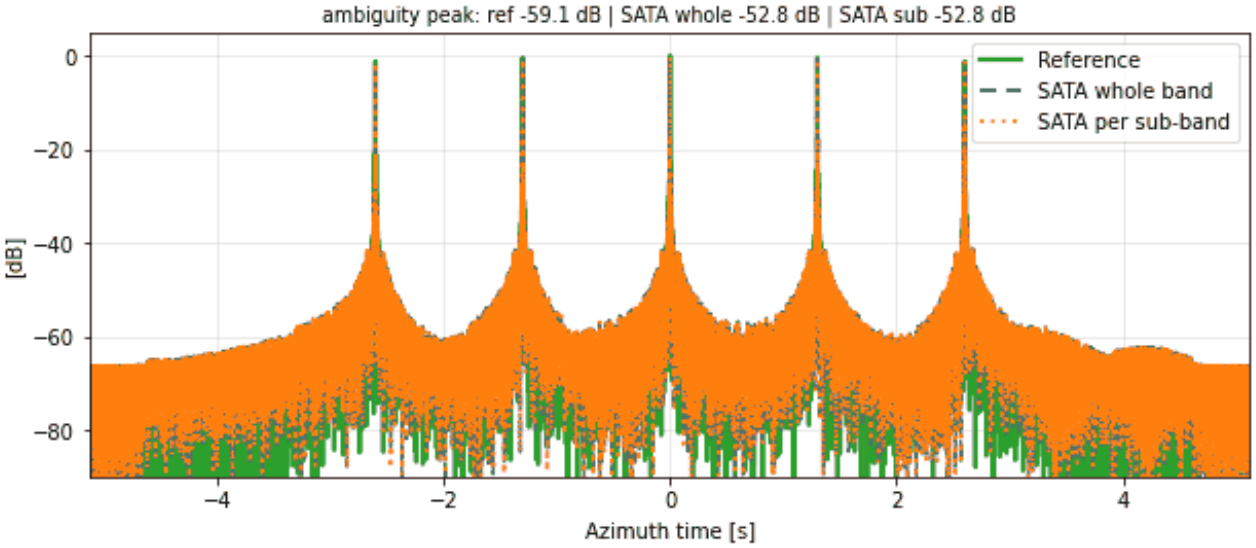


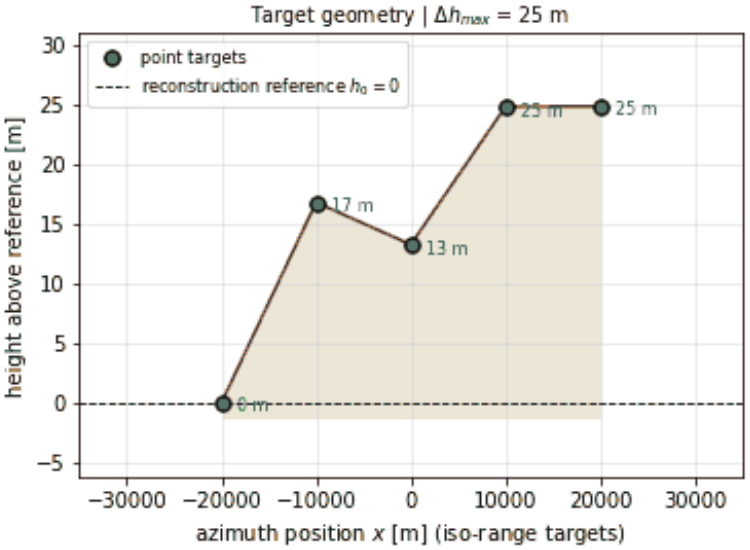


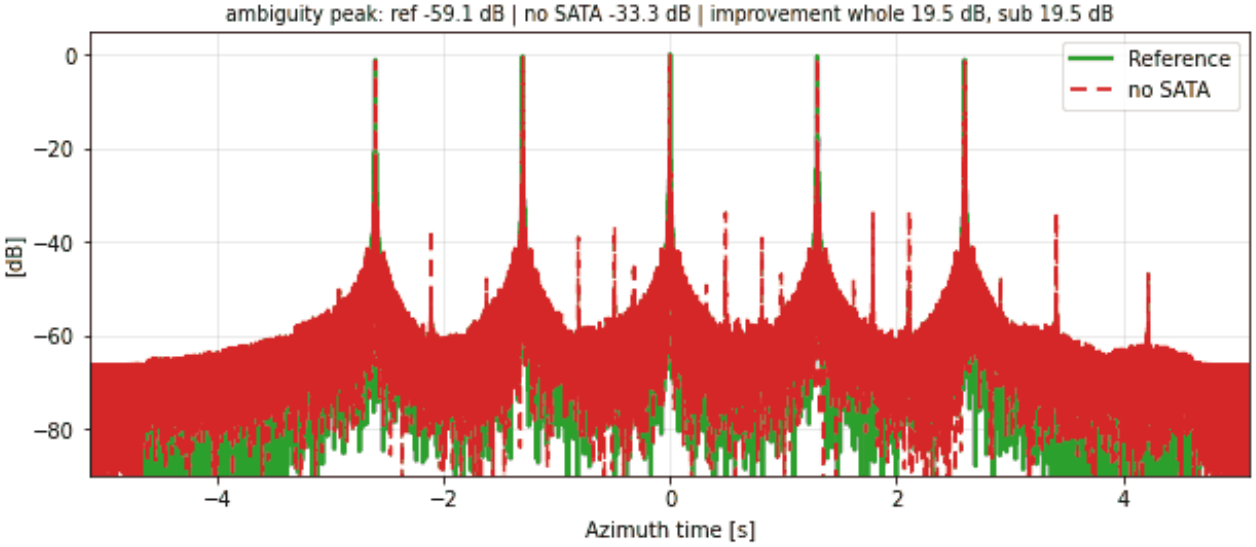


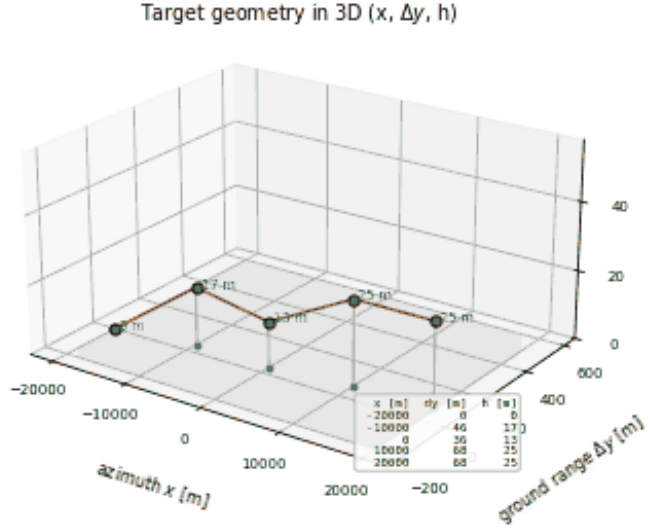


PW-LS-003 | SATA 1D | piecewise ramp: N = 5, random slopes over 20-m steps, seed 2, targets 10 km apart (large distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

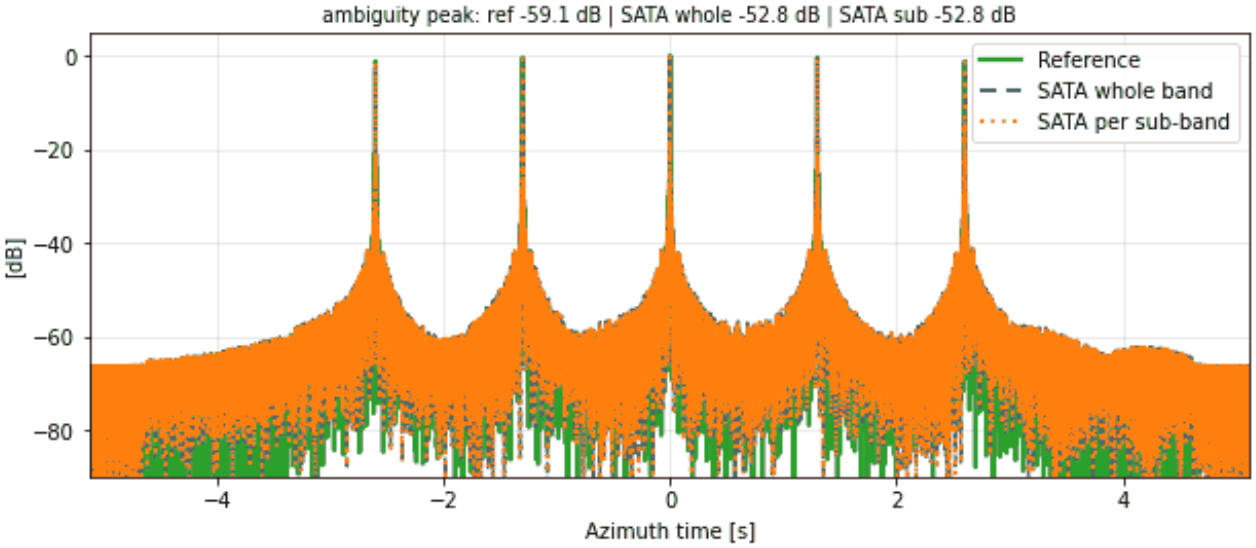


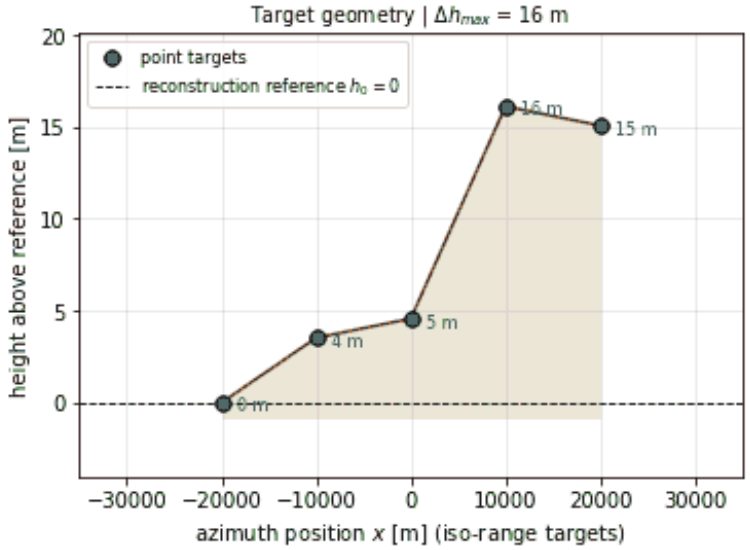


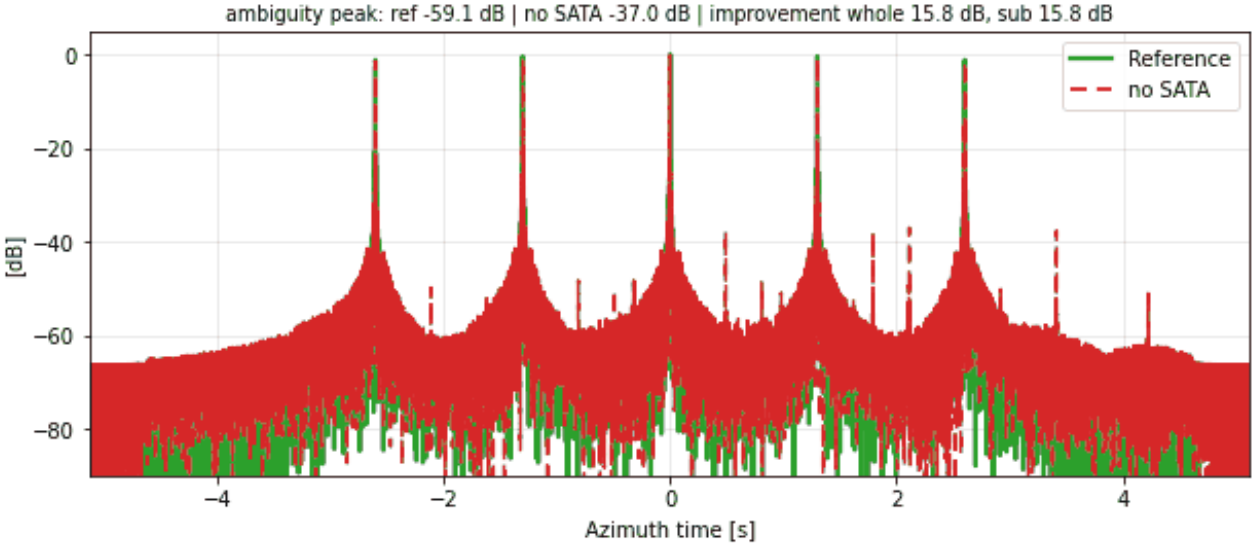


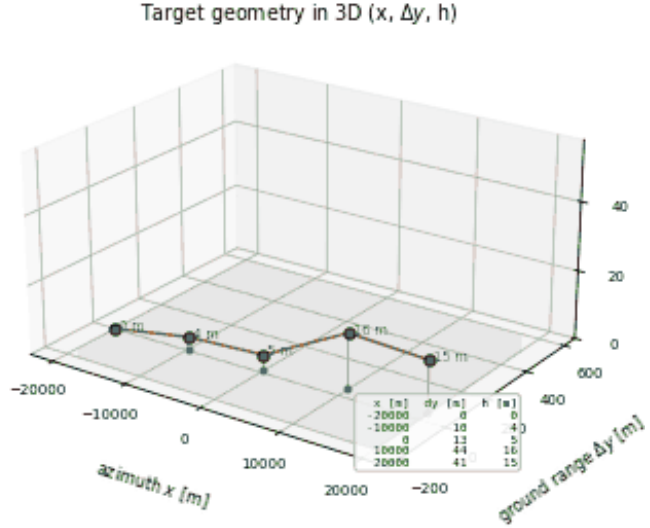


PW-LS-004 | SATA 1D | piecewise ramp: N = 5, random slopes over 20-m steps, seed 3, targets 10 km apart (large distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

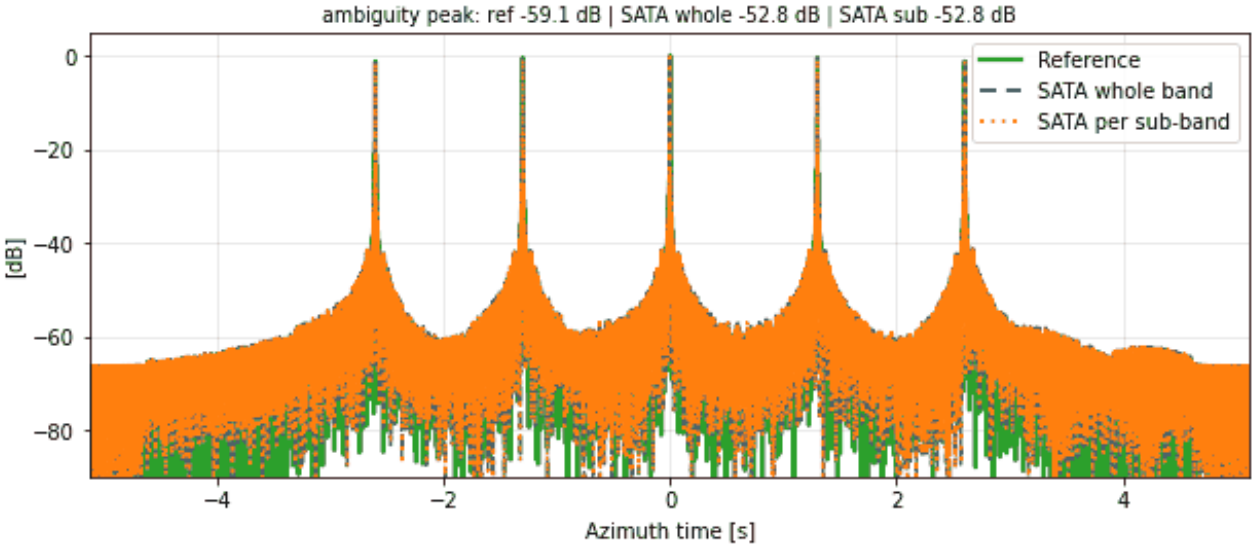


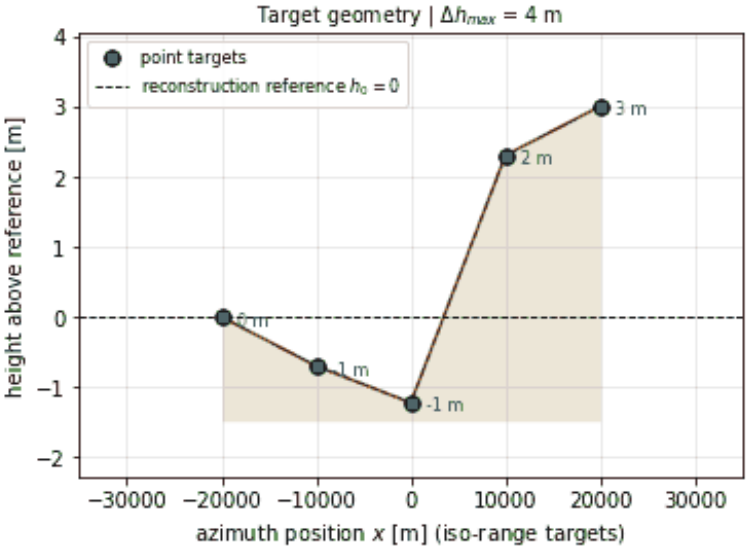


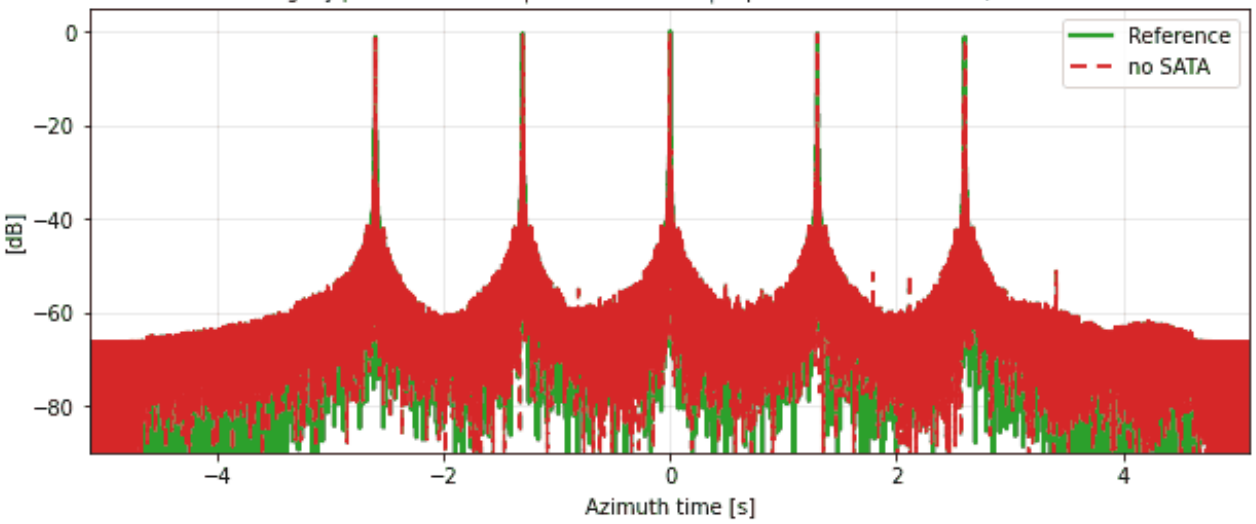


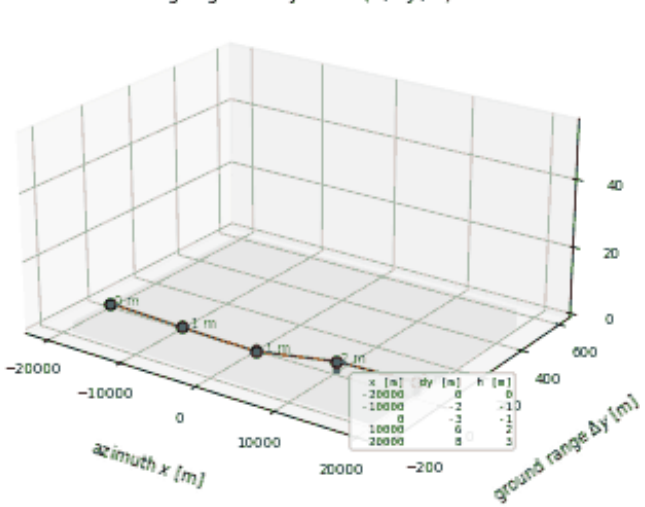


PW-LS-005 | SATA 1D | piecewise ramp: N = 5, random slopes over 20-m steps, seed 4, targets 10 km apart (large distance), small heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

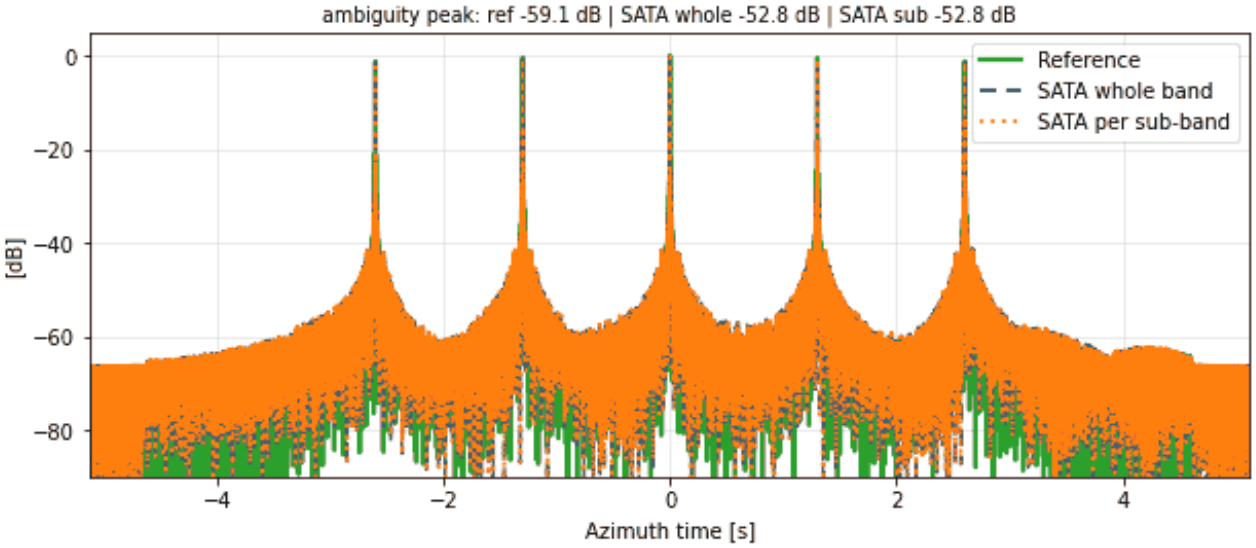


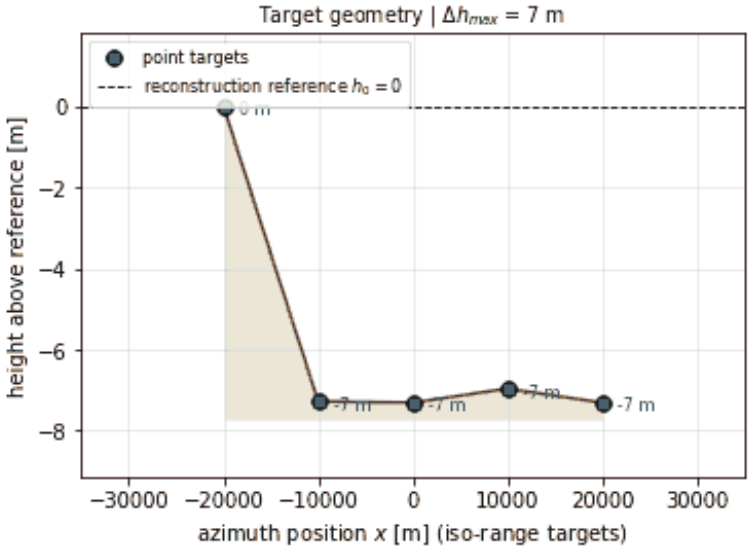


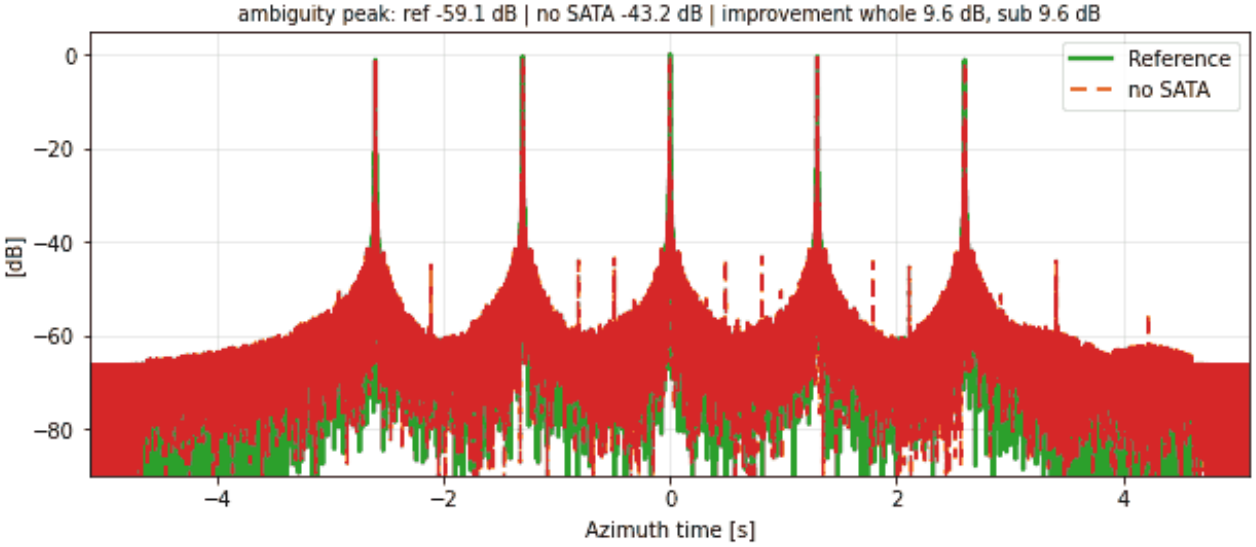


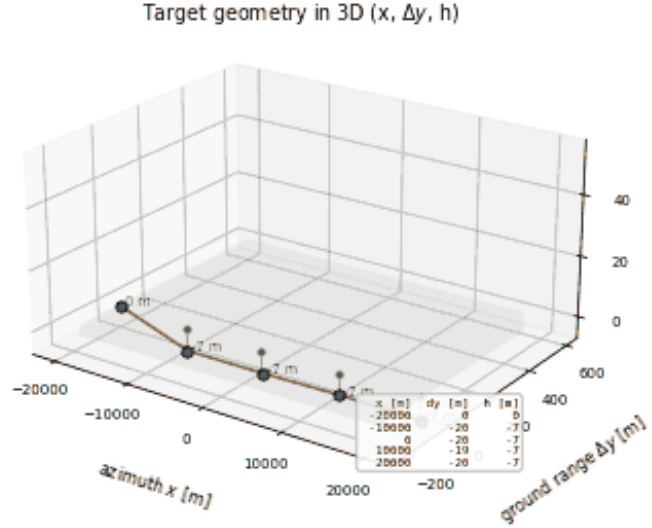


PW-LN-001 | SATA 1D | piecewise ramp: N = 5, random slopes over 200-m steps, seed 0, targets 10 km apart (large distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

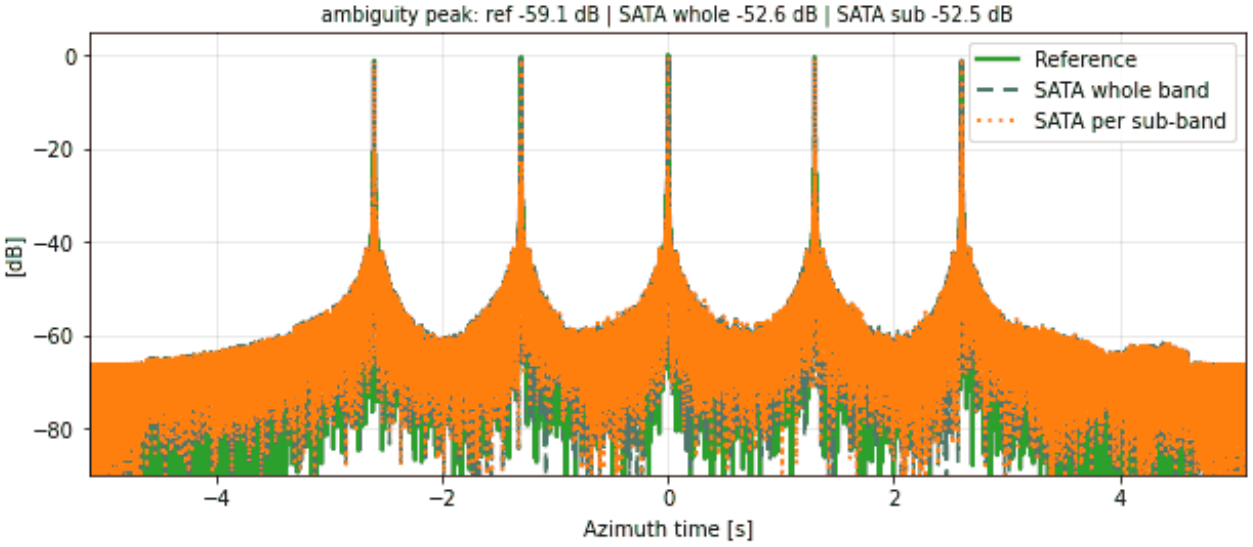


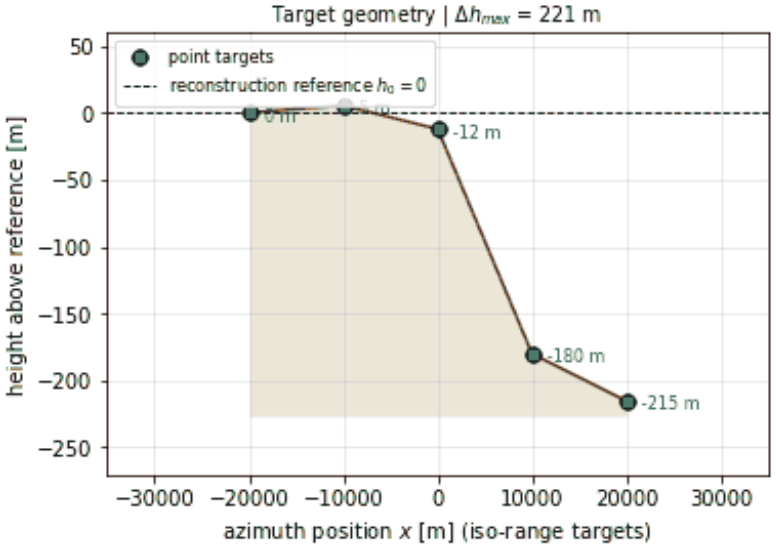


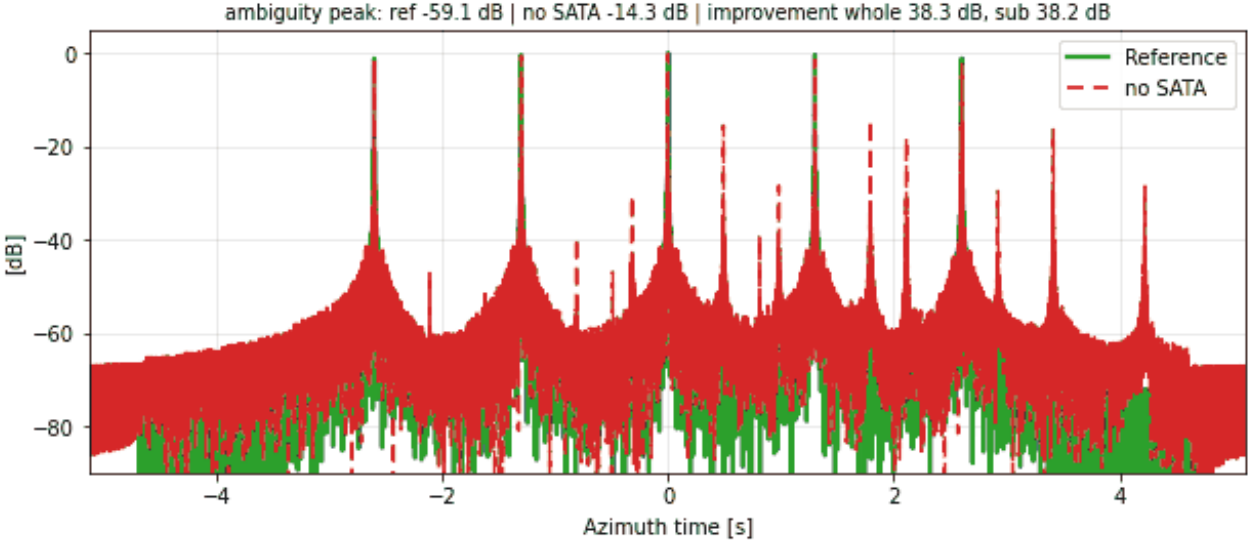

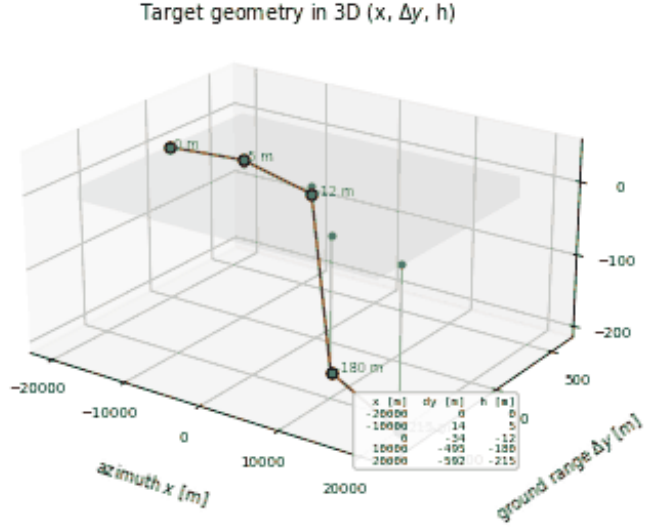


PW-LN-002 | SATA 1D | piecewise ramp: N = 5, random slopes over 200-m steps, seed 1, targets 10 km apart (large distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

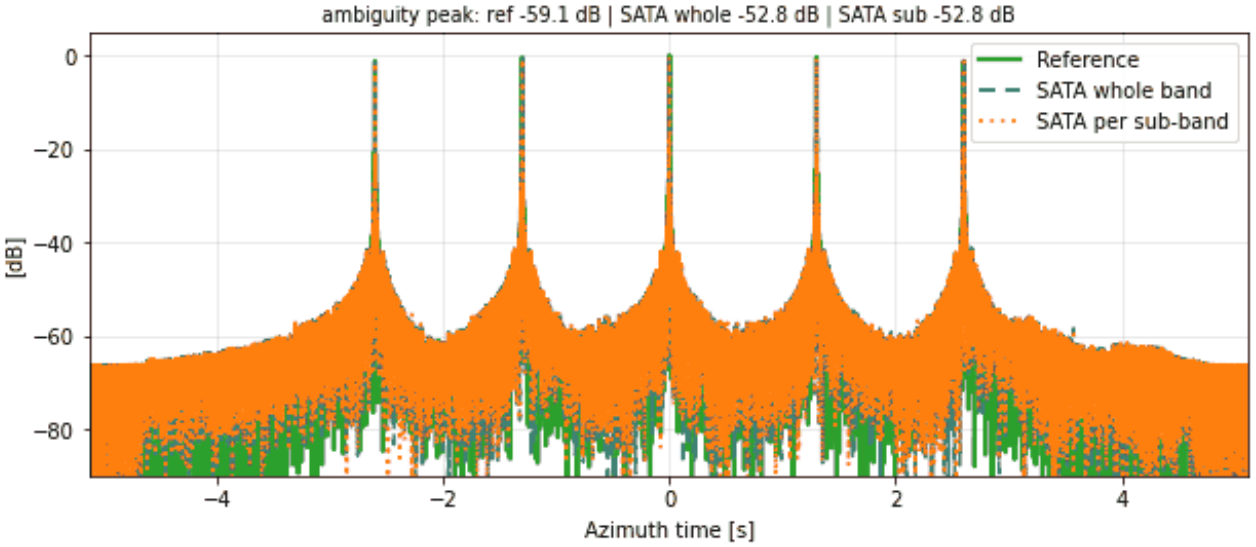


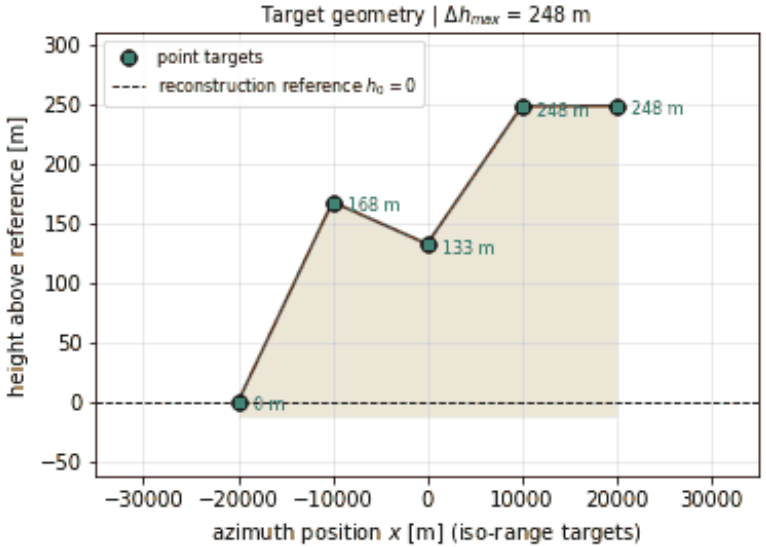





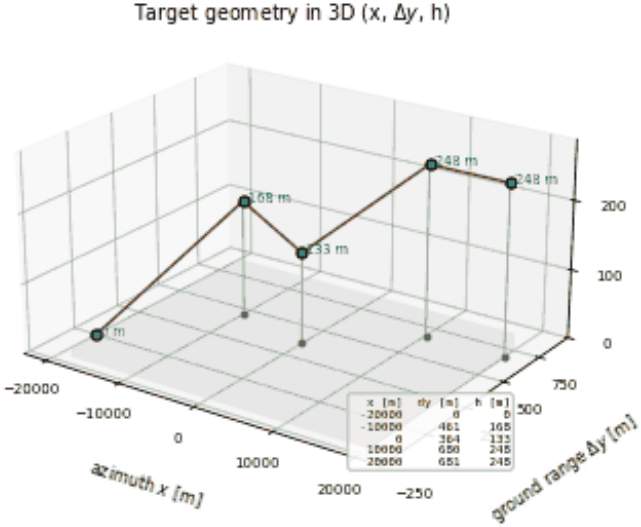


PW-LN-003 | SATA 1D | piecewise ramp: N = 5, random slopes over 200-m steps, seed 2, targets 10 km apart (large distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

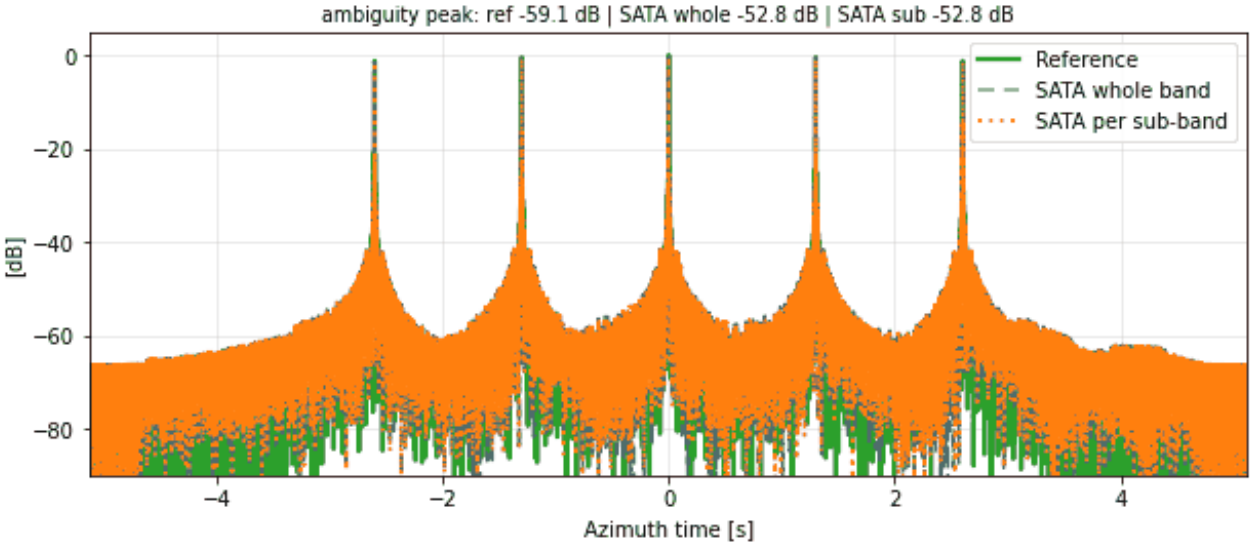


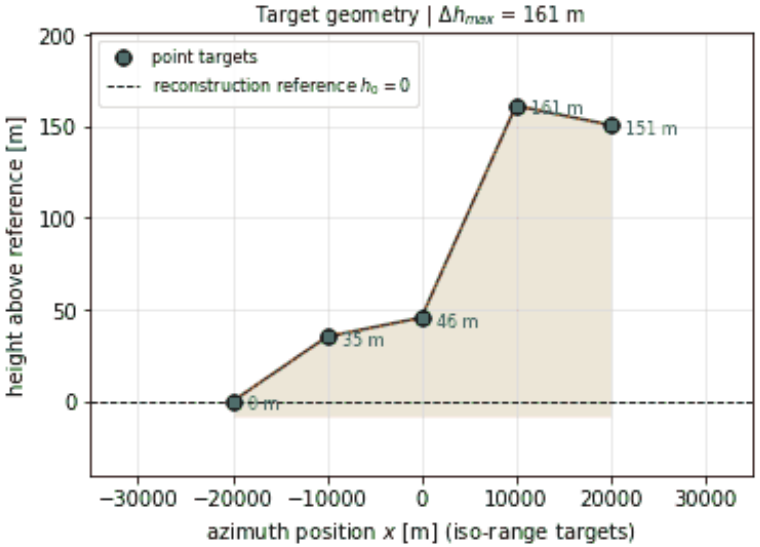


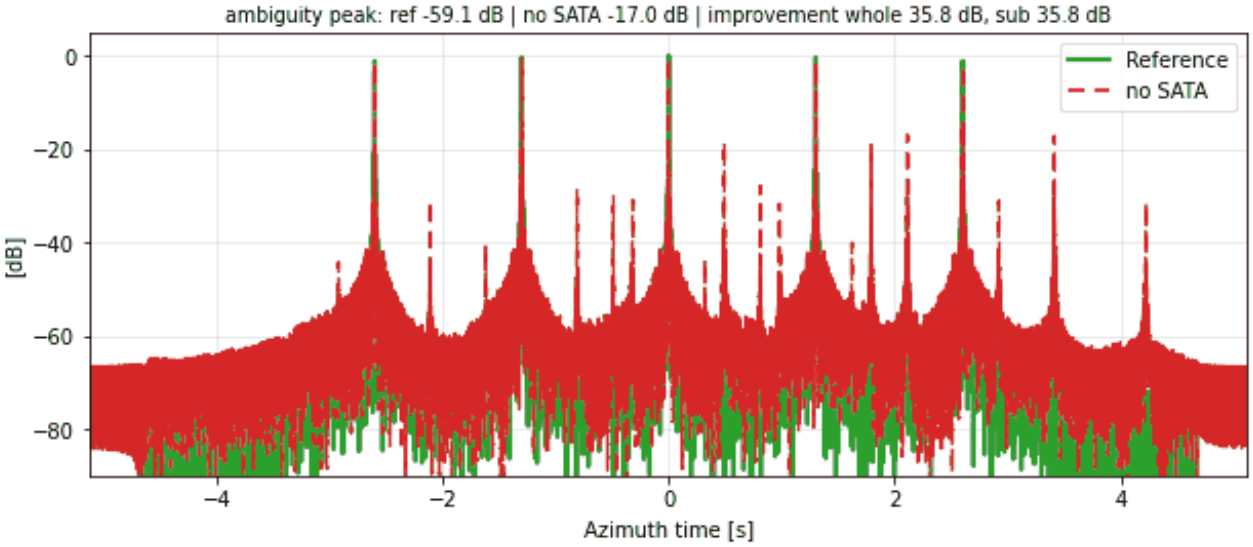


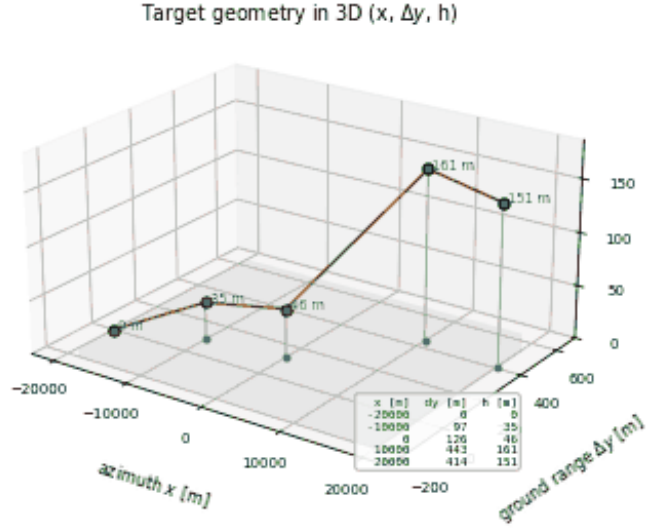


PW-LN-004 | SATA 1D | piecewise ramp: N = 5, random slopes over 200-m steps, seed 3, targets 10 km apart (large distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

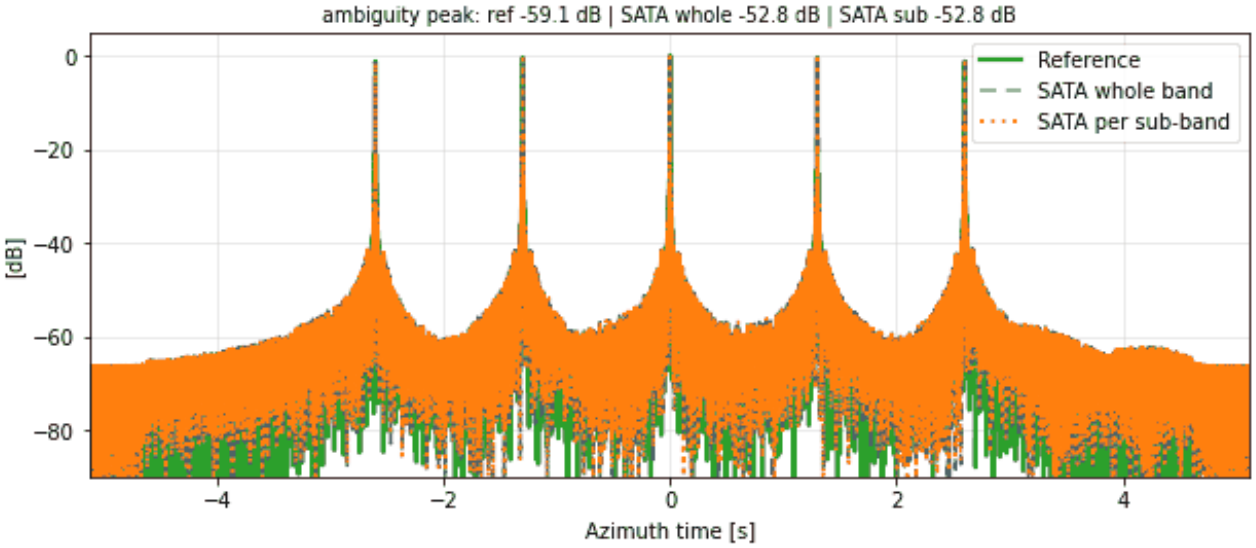


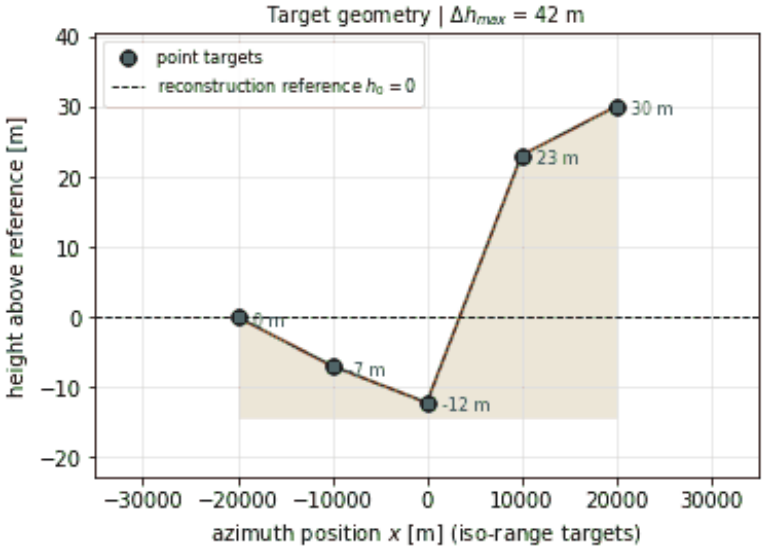


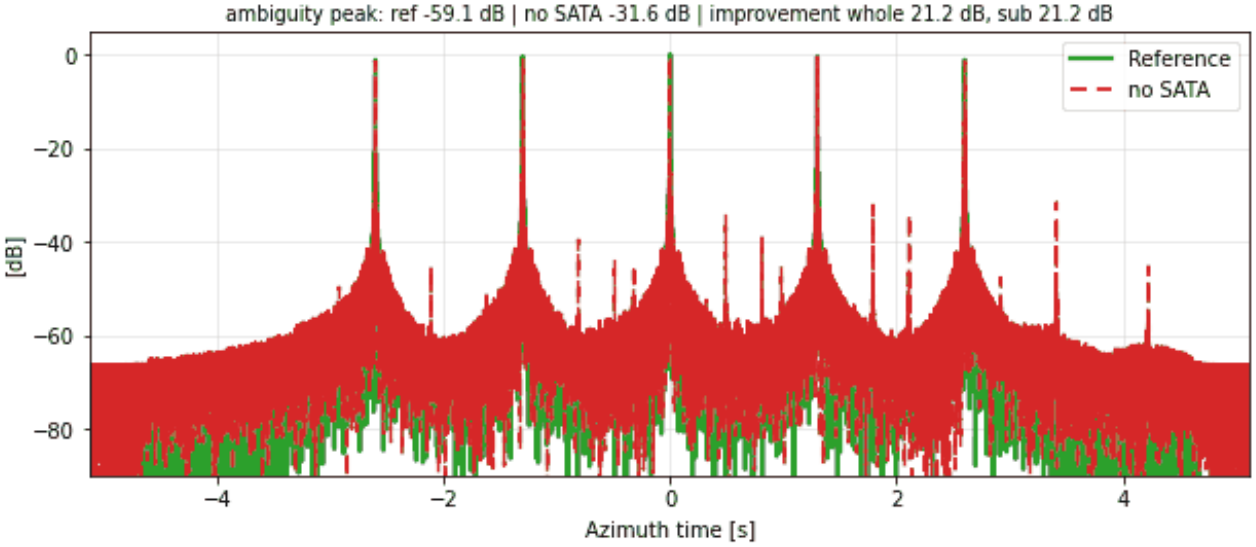


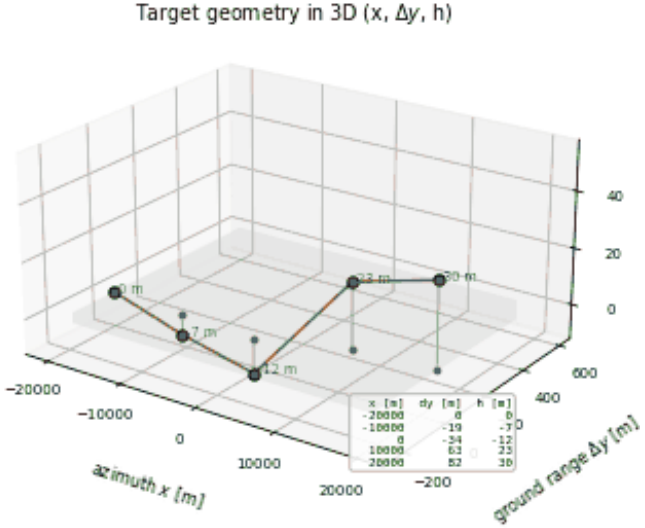


PW-LN-005 | SATA 1D | piecewise ramp: N = 5, random slopes over 200-m steps, seed 4, targets 10 km apart (large distance), normal heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

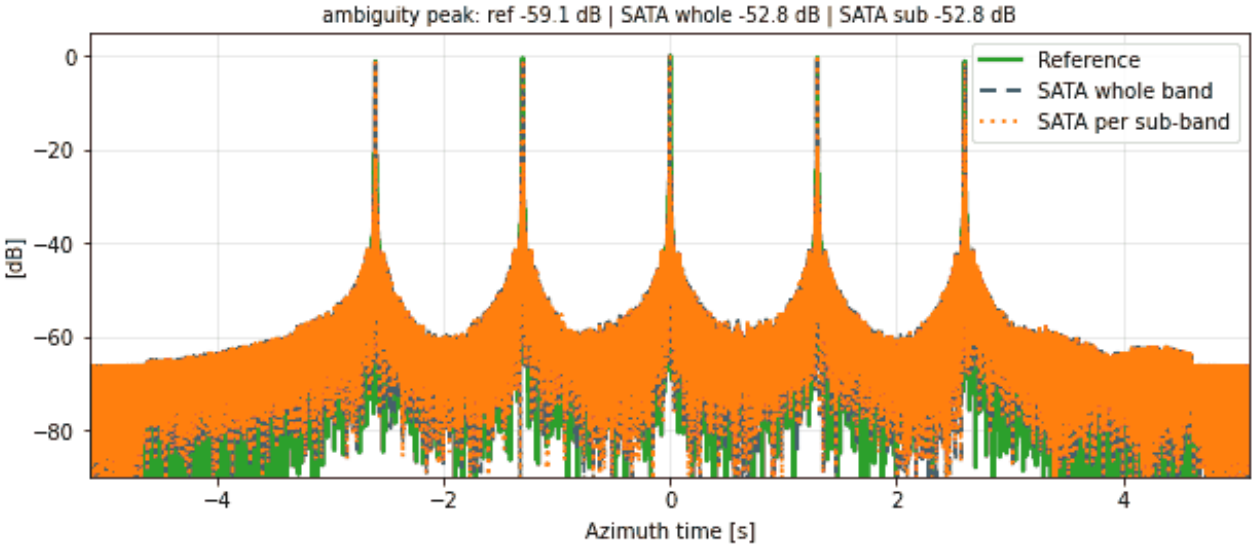


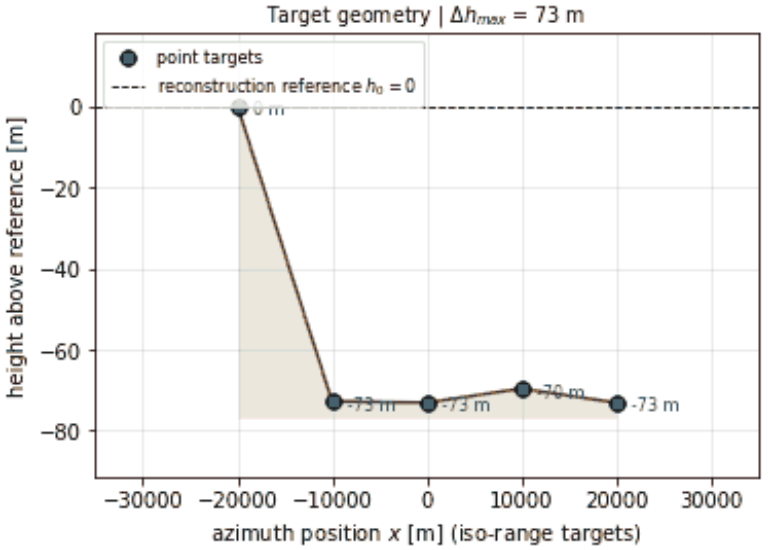


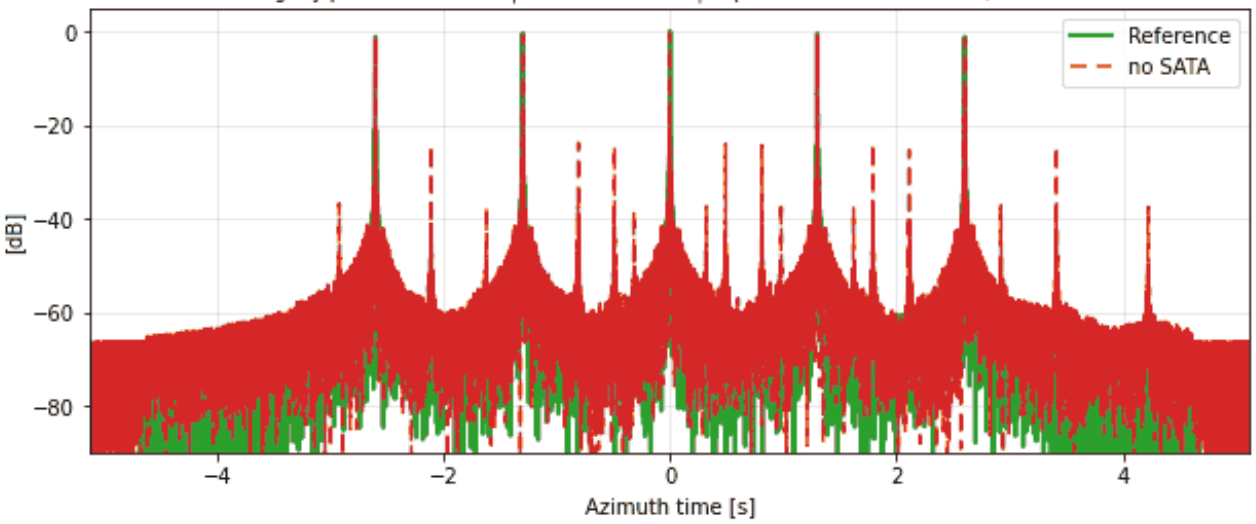


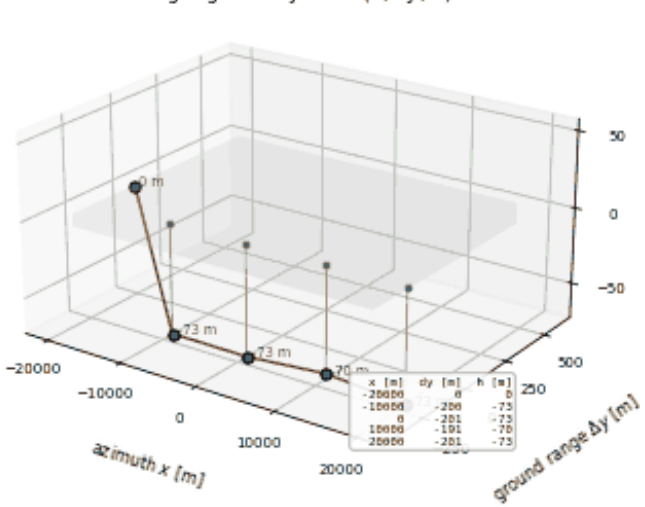


PW-LL-001 | SATA 1D | piecewise ramp: N = 5, random slopes over 2600-m steps, seed 0, targets 10 km apart (large distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

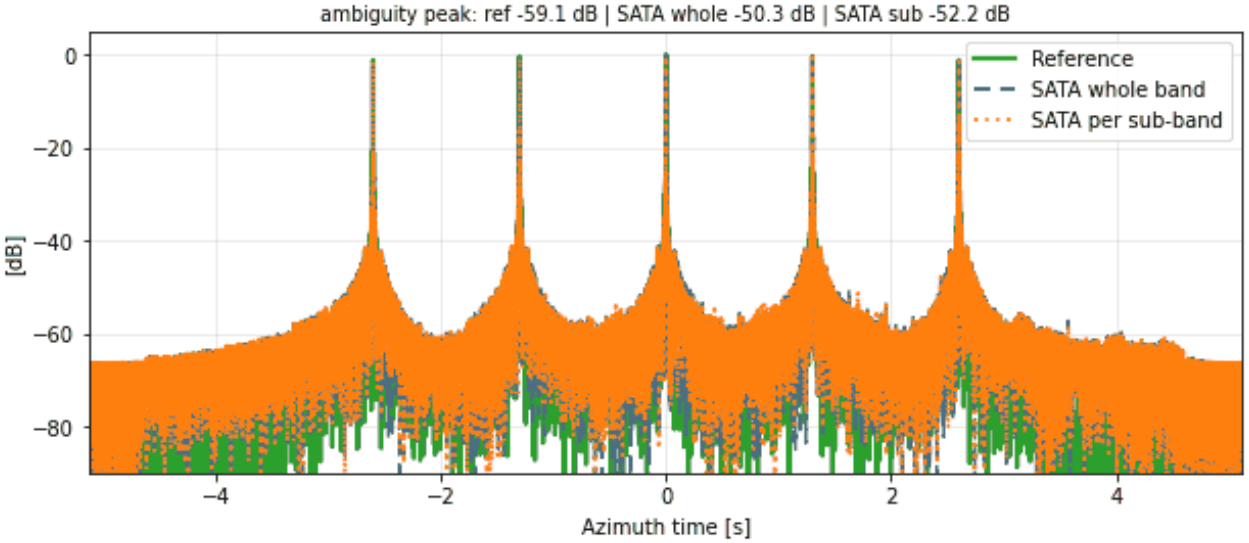


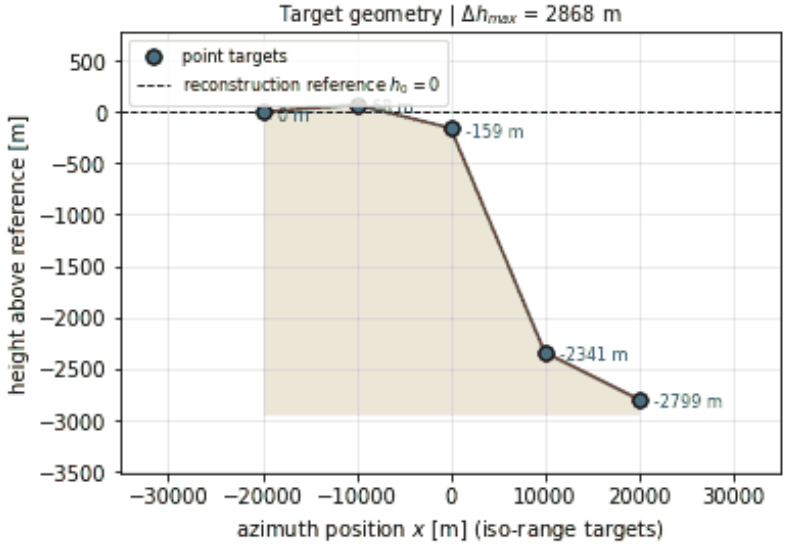


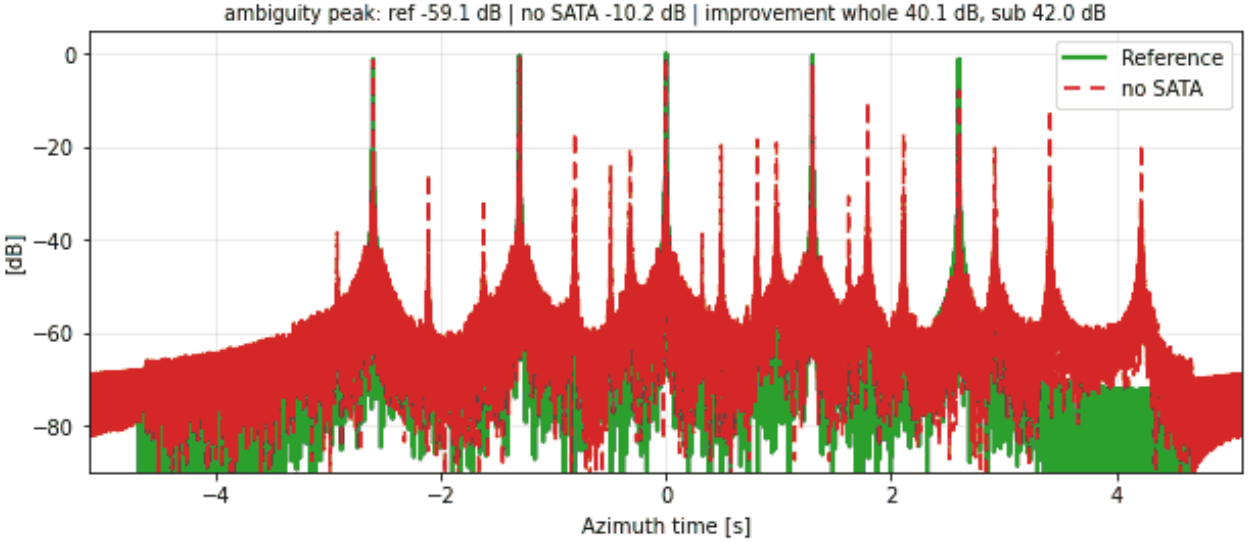


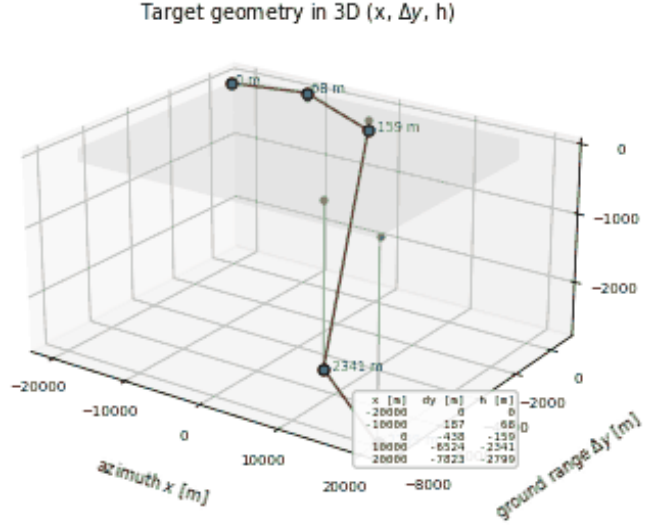


PW-LL-002 | SATA 1D | piecewise ramp: N = 5, random slopes over 2600-m steps, seed 1, targets 10 km apart (large distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

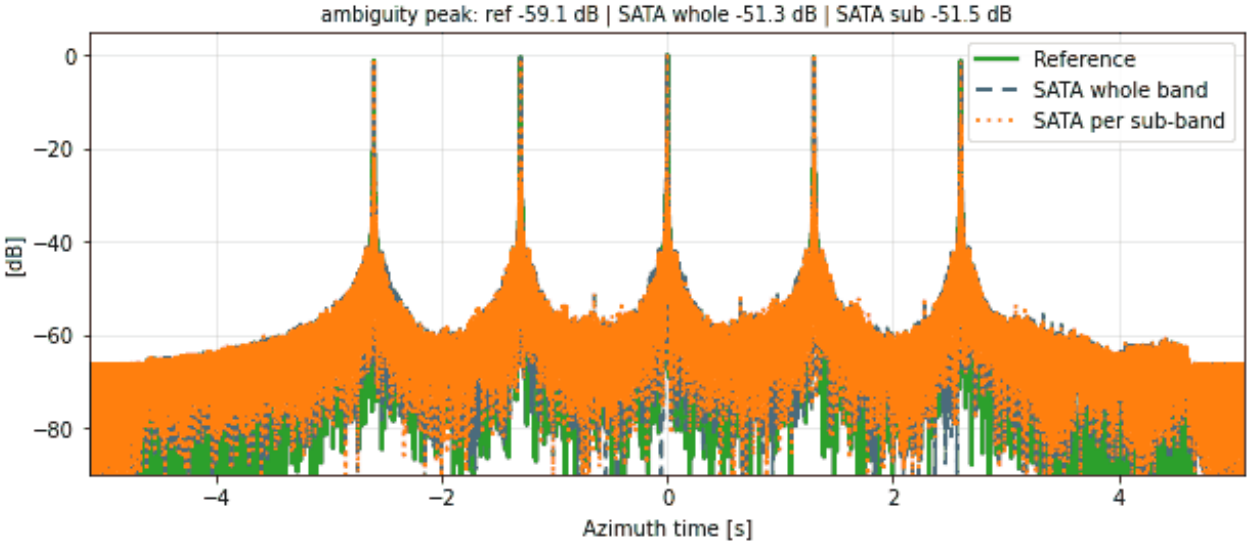


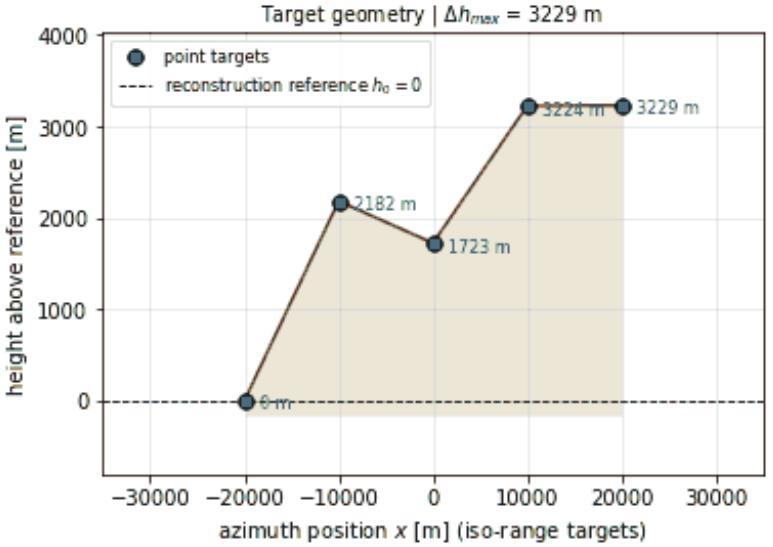


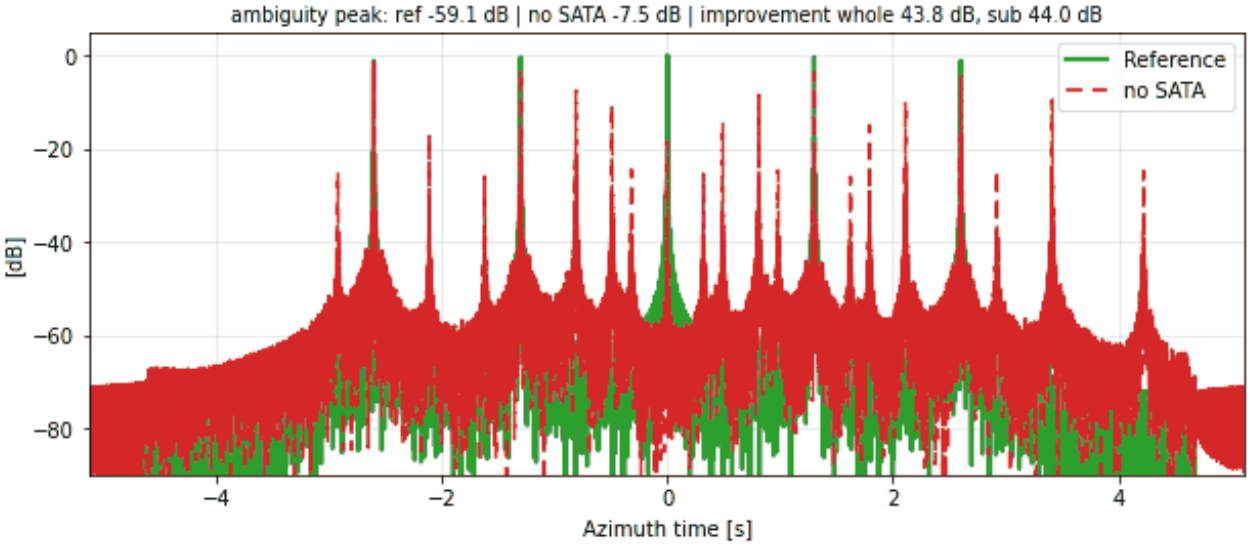


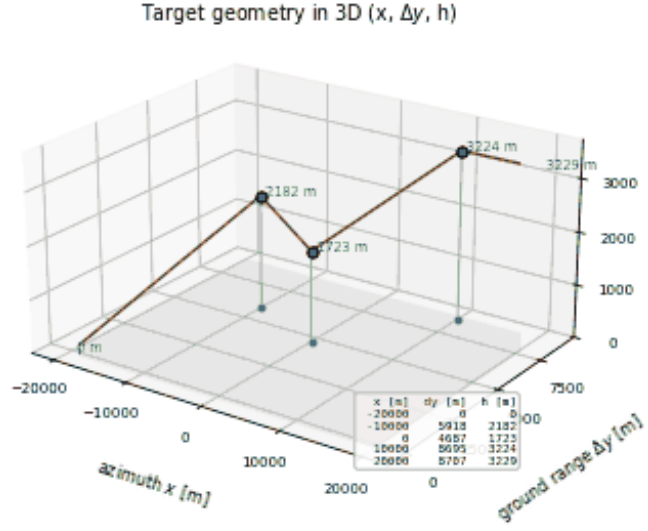


PW-LL-003 | SATA 1D | piecewise ramp: N = 5, random slopes over 2600-m steps, seed 2, targets 10 km apart (large distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

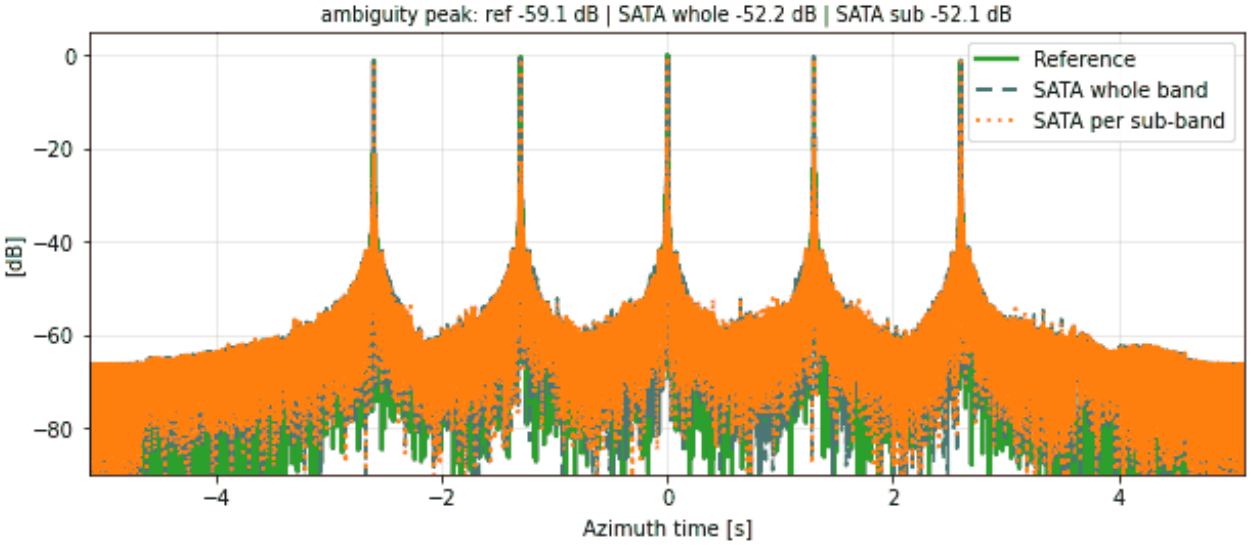


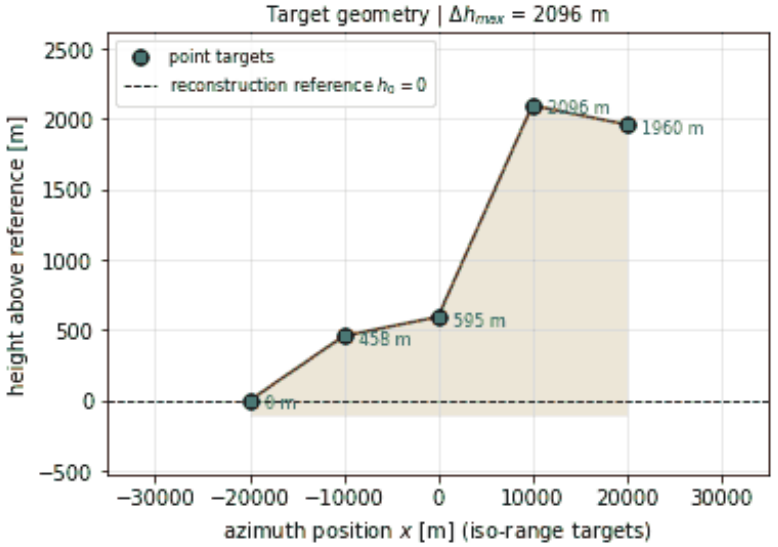


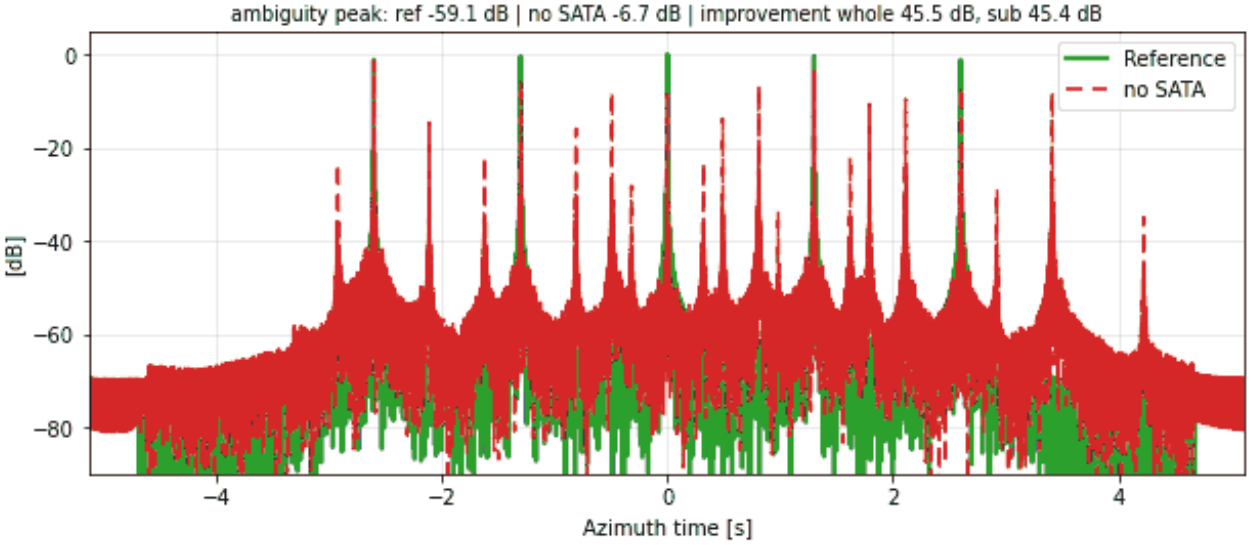


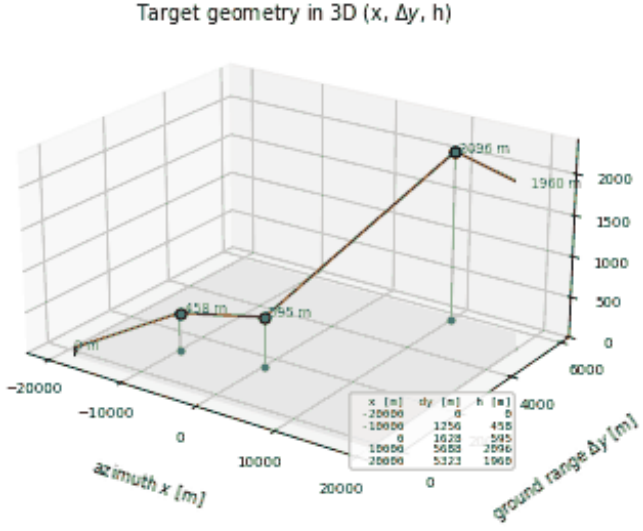


PW-LL-004 | SATA 1D | piecewise ramp: N = 5, random slopes over 2600-m steps, seed 3, targets 10 km apart (large distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

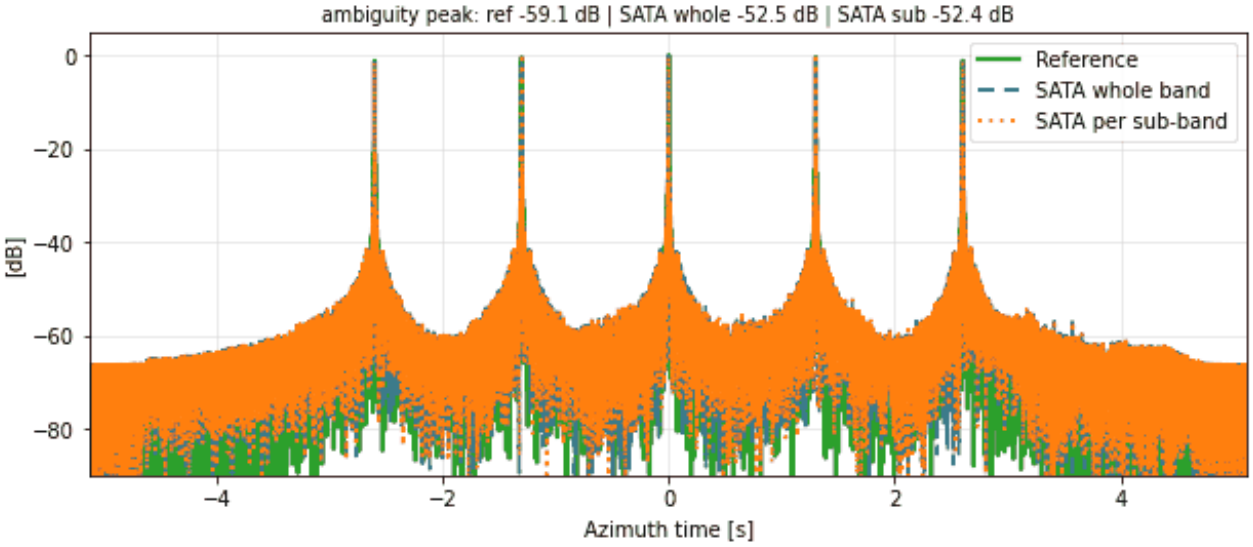

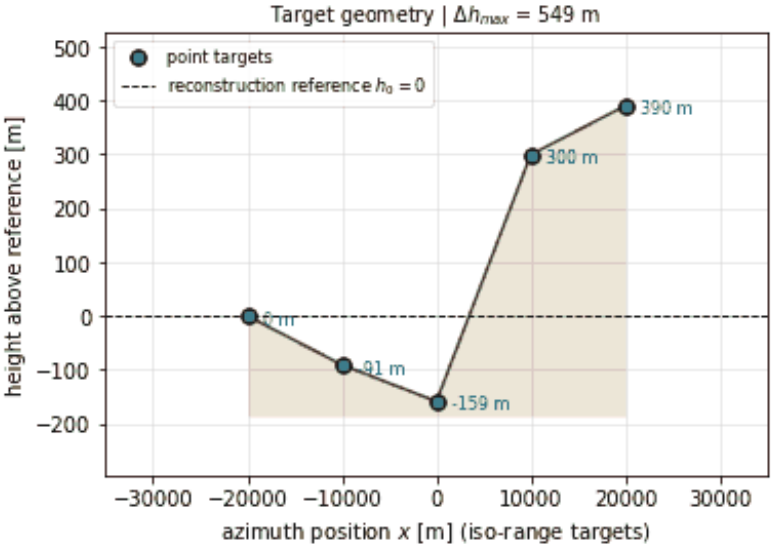

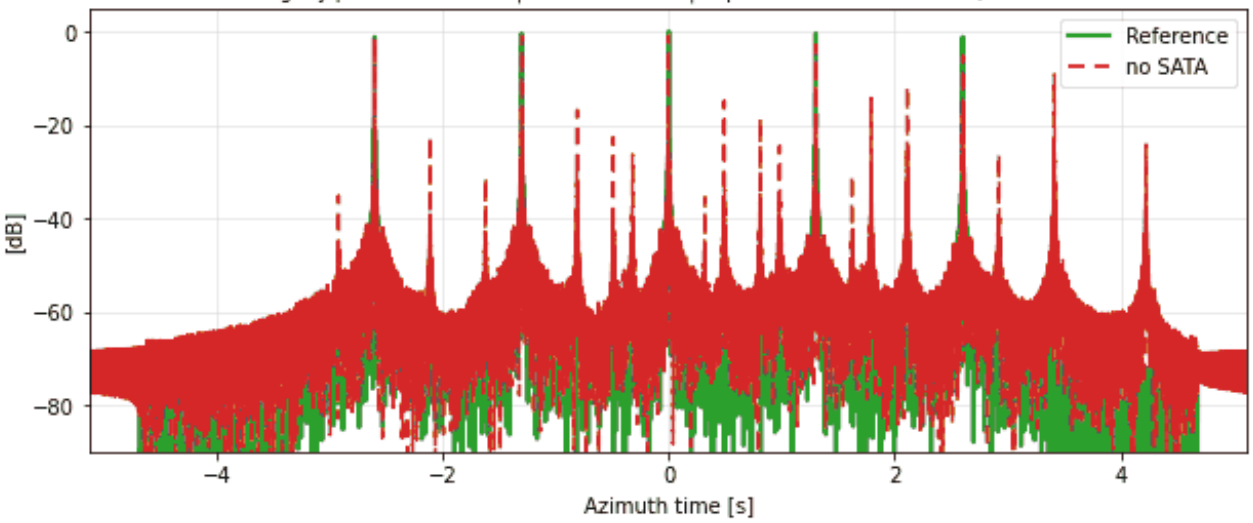

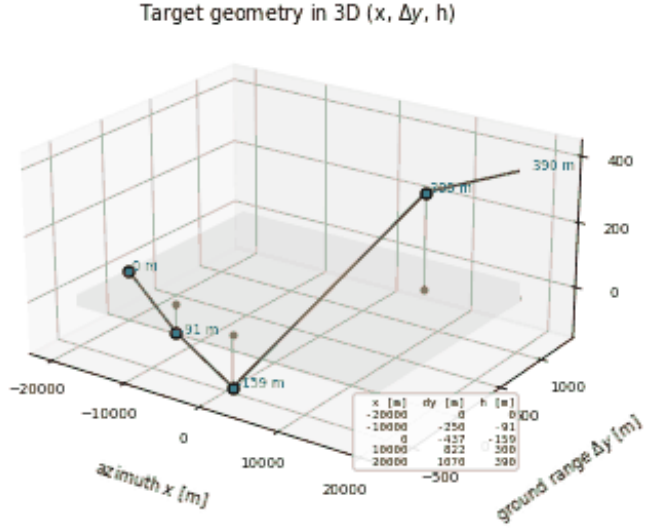

PW-LL-005 | SATA 1D | piecewise ramp: N = 5, random slopes over 2600-m steps, seed 4, targets 10 km apart (large distance), large heights
b_{xt} = [63.7, 27.0, 4.1, 1.7] m | N_{rx} = 4 | PRF = 2000 Hz | B_a = 1235 Hz | Δb_{at} = 7.69 m (DPCA)

