

SDFSDFSDF



Faculty of Medicine  
Biomedical Engineering

Master of Science Thesis

# 3D Liver Reconstruction from Tracked Ultrasound

by

**Luca Sahli**

of Wohlen b. Bern, Switzerland

Supervisors  
MSc Iwan Paolucci and Prof. Dr.-Ing. Stefan Weber

Institutions  
ARTORG Center for Biomedical Engineering Research, University of Bern

Examiners  
Prof. Dr.-Ing. Stefan Weber and MSc Iwan Paolucci

Bern, October 2018



## Abstract

*The abstract should provide a concise (300-400 word) summary of the motivation, methodology, main results and conclusions. For example:*

Osteoporosis is a disease in which the density and quality of bone are reduced. As the bones become more porous and fragile, the risk of fracture is greatly increased. The loss of bone occurs progressively, often there are no symptoms until the first fracture occurs. Nowadays as many women are dying from osteoporosis as from breast cancer. Moreover it has been estimated that yearly costs arising from osteoporotic fractures alone in Europe worth 30 billion Euros.

Percutaneous vertebroplasty is the injection of bone cement into the vertebral body in order to relieve pain and stabilize fractured and/or osteoporotic vertebrae with immediate improvement of the symptoms. Treatment risks and complications include those related to needle placement, infection, bleeding and cement extravasation. The cement can leak into extraosseous tissues, including the epidural or paravertebral venous system eventually ending in pulmonary embolism and death.

The aim of this project was to develop a computational model to simulate the flow of two immiscible fluids through porous trabecular bone in order to predict the three-dimensional spreading patterns developing from the cement injection and minimize the risk of cement extravasation while maximizing the mechanical effect. The computational model estimates region specific porosity and anisotropic permeability from Hounsfield unit values obtained from patient-specific clinical computer tomography data sets. The creeping flow through the porous matrix is governed by a modified version of Darcy's Law, an empirical relation of the pressure gradient to the flow velocity with consideration of the complex rheological properties of bone cement.

To simulate the immiscible two phase fluid flow, i.e. the displacement of a biofluid by a biomaterial, a fluid interface tracking algorithm with mixed boundary representation has been developed. The nonlinear partial differential equation arising from the problem was numerically implemented into the open-source Finite Element framework *libMesh*. The algorithm design allows the incorporation of the developed methods into a larger simulation of vertebral bone augmentation for pre-surgical planning.

First simulation trials showed close agreement with the findings from relevant literature. The computational model demonstrated efficiency and numerical stability. The future model development may incorporate the morphology of the region specific trabecular bone structure improving the models' accuracy or the prediction of the orientation and alignment of fiber-reinforced bone cements in order to increase fracture-resistance.



## Acknowledgements

*Here you may include acknowledgements.*

*Ich erkläre hiermit, dass ich diese Arbeit selbständig verfasst und keine anderen als die angegebenen Hilfsmittel benutzt habe. Alle Stellen, die wörtlich oder sinngemäss aus Quellen entnommen wurden, habe ich als solche kenntlich gemacht. Mir ist bekannt, dass andernfalls der Senat gemäss dem Gesetz über die Universität zum Entzug des auf Grund dieser Arbeit verliehenen Titels berechtigt ist.*

Bern, October 31<sup>th</sup> 2018

Luca Sahli

# Contents

<b>Contents</b>	<b>vii</b>
<b>1 Introduction</b>	<b>1</b>
1.1 Motivation . . . . .	1
1.2 The Liver . . . . .	1
1.2.1 Liver Anatomy . . . . .	1
1.2.2 Liver Cancer . . . . .	2
1.3 Liver Resections . . . . .	3
1.3.1 Parenchymal-sparing liver surgeries . . . . .	3
1.4 Objectives . . . . .	3
<b>2 State of the art</b>	<b>5</b>
2.1 Intraoperative ultrasound . . . . .	5
2.2 Navigation for liver resections . . . . .	5
2.2.1 Registration methods . . . . .	5
2.2.2 Tracking modalities . . . . .	5
2.3 Surface reconstruction . . . . .	6
<b>3 Problem Statement</b>	<b>7</b>
<b>4 Concept</b>	<b>9</b>
4.1 System . . . . .	9
4.2 Functionalities . . . . .	9
4.2.1 Surface Reconstruction . . . . .	9
4.2.2 Tumor Segmentation . . . . .	9
4.2.3 Resection Planning . . . . .	9
4.3 Workflow . . . . .	9
4.3.1 Resection planning for non-anatomical . . . . .	9
<b>5 Implementation</b>	<b>11</b>
5.1 Surface Reconstruction . . . . .	11
5.1.1 Surface contact detection . . . . .	11
5.1.2 Outlier removal . . . . .	11
5.1.3 Reconstruction Parameters . . . . .	11
5.2 Tumor Segmentation . . . . .	11
5.3 Resection Planning . . . . .	11
5.3.1 Cone fitting around tumor . . . . .	11
5.4 Visualization for navigation . . . . .	11
5.4.1 Ultrasound overlay . . . . .	11

5.4.2	3D model . . . . .	11
5.5	UI Concept . . . . .	11
<b>6</b>	<b>Experiments</b>	<b>13</b>
6.1	Surface Accuracy on a technical phantom . . . . .	13
6.1.1	Methodology . . . . .	13
6.1.2	Results . . . . .	13
6.1.3	Discussion . . . . .	13
6.2	Surface reconstruction on retrospective data . . . . .	13
6.2.1	Methodology . . . . .	13
6.2.2	Results . . . . .	13
6.2.3	Discussion . . . . .	13
6.3	Usability Test . . . . .	13
6.3.1	Methodology . . . . .	13
6.3.2	Results . . . . .	13
6.3.3	Discussion . . . . .	13
<b>7</b>	<b>Discussion and Conclusions</b>	<b>15</b>
7.1	Discussion . . . . .	15
7.2	Conclusions . . . . .	15
<b>8</b>	<b>Outlook</b>	<b>17</b>
	<b>Bibliography</b>	<b>19</b>
<b>A</b>	<b>Vector and Tensor Mathematics</b>	<b>25</b>
A.1	Introduction . . . . .	25
A.2	Variable Types . . . . .	25
<b>B</b>	<b>Another Appendix</b>	<b>27</b>
B.1	Section 1 . . . . .	27
B.2	Section 2 . . . . .	27

# Chapter 1


## Introduction

### 1.1 Motivation

### 1.2 The Liver

#### 1.2.1 Liver Anatomy

The human liver overlies the gallbladder, is located in the right upper quadrant of the abdomen and has different functions. It produces biochemicals necessary for digestion, synthesizes proteins and detoxifies various metabolites. A human liver weighs normally around 1.5 kg, is the heaviest internal organ and the largest gland of the human body. Two large blood vessels are connected to the liver: the portal vein and the hepatic artery. Both of them subdivide into small capillaries called *liver sinusoids* and then lead to the functional units of the liver known as *lobules*. To refer to the different parts of the liver, it is subdivided into eight subsegments. Each segment has its own vascular inflow and outflow.

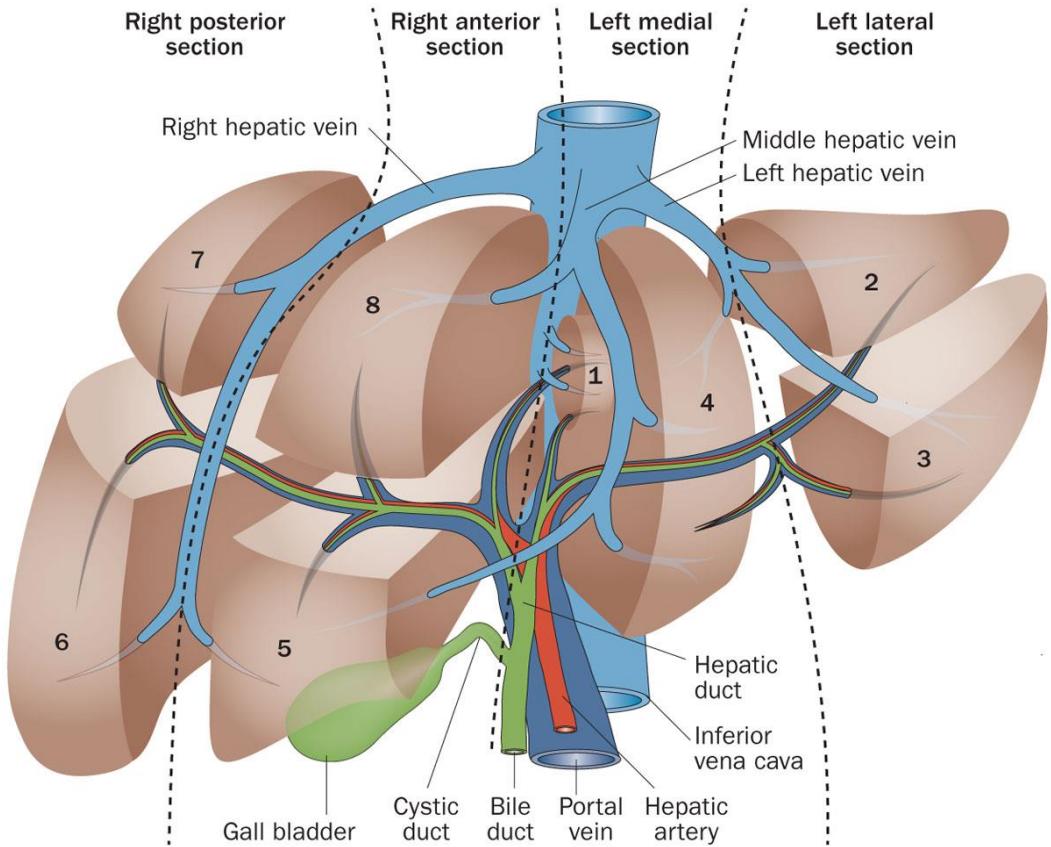


**Figure 1.1.** The liver and its eight Chouinaud segments. In red is the hepatic artery which transports blood from the heart a into the liver. In dark blue the portal vein, it transports blood from the gut into the liver. All the blood leaves the liver through the hepatic veins to the vena cava [25].

### 1.2.2 Liver Cancer

Liver cancer is cancer that starts in the liver. If the cancer has spread from elsewhere to the liver, then it is known as liver metastasis. Liver metastasis are about 20 times more common than primary tumors. One of the reasons for that is the rich blood supply of the liver which helps the tumors to grow [22]. Liver cancer patients often have chronic liver diseases such as cirrhosis, problems of alcohol abuse, and viral hepatitis (B or C) [15]. The gold standard to treat liver cancer are surgical resections [17]. The liver tissue can easily regrow, given that after resection there is enough healthy tissue and blood supply preserved. Alternatively to resections one can treat liver tumors by local ablation. Both variants treat the tumors with a safety margin of 10 mm. This safety margin ensures that all tumor cells are destroyed and to prevent further spread of cancer cells [20].

### 1.3 Liver Resections

Hepatectomy is the surgical resection (removal of all or part) of the liver. Liver resections are considered major surgeries and are done under general anesthesia. Most hepatectomies are done laparoscopically. However for complicated cases also open surgeries are done [8]. Two resection techniques can be separated. Anatomical or parenchymal-sparing resections. This work will concentrate on the latter technique.

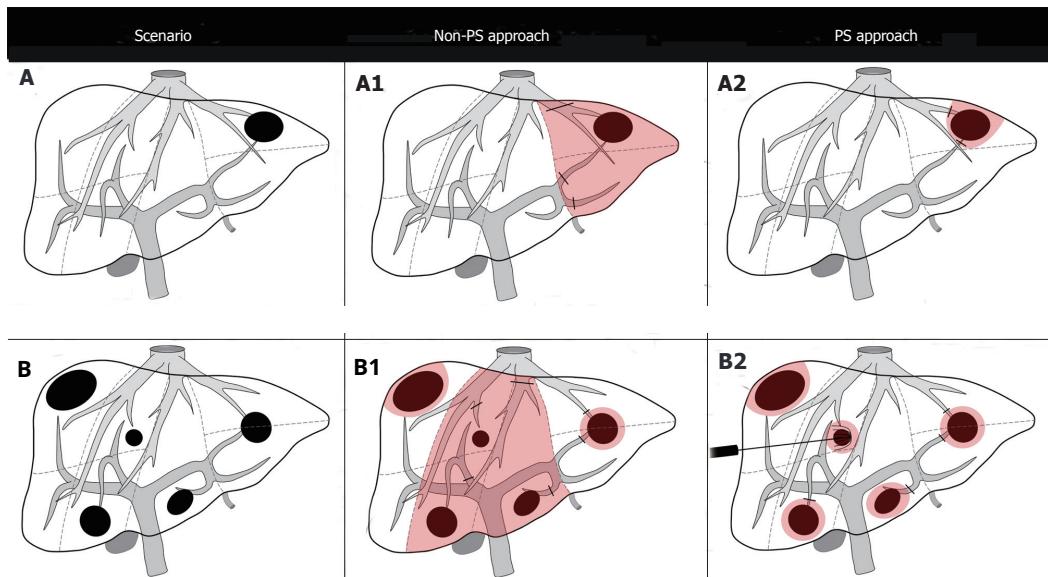

**Figure 1.2.** Two different approaches to resect liver tumors in two different situations. The *Scenario* column shows the situation of the patient's liver, the *Non-PS approach* column shows how an anatomical resection plan would look like and the *PS approach* column shows how a parenchymal-sparing resection plan would look like [4].

#### 1.3.1 Parenchymal-sparing liver surgeries

[4]

### 1.4 Objectives

Laparoscopic anatomical hepatectomy (LAH)



## Chapter 2

# State of the art

### 2.1 Intraoperative ultrasound

Ultrasound imaging works by the *pulse-echo* principle. A short ultrasound-pulse is emitted from a transducer. Then the soundwaves get transmitted and reflected differently by different tissues. The reflected soundwaves travel back into the transducer and get converted into an electrical signal. After post-processing these signals become ultrasound images. Basically the ultrasound measures the mechanical properties of the tissue. The tissues have different acoustic impedance, which is the product of tissue density and ultrasound speed in travelling through the tissue. The resolution of the ultrasound images depends on the frequency of the ultrasound waves. High frequencies lead to high resolutions but low depth into the tissue because the absorption of the sound energy increases with frequency too. Therefore the useability to see deep structures is limited [27].

### 2.2 Navigation for liver resections

Navigation in liver surgeries is mostly done by registering the patient to a pre-operative 3D computer tomography (CT) scan of the liver during the surgery. All surgical instruments have trackable markers attached to them. A tracking camera sees these markers and can differentiate the different instruments from their attached markers. The achieved navigation accuracy was  $4.5 \text{ mm} \pm 3.6 \text{ mm}$  averaged over nine surgeries [24]. Current research tries to compensate for deformations of the liver after the CT scan to the actual shape [10] [11].

#### 2.2.1 Registration methods

Different registration methods exist. Discrete landmarks, surface scans and volumetric sonography scans are just a few of the approaches that can be used to achieve precise alignment of the preoperative image data with the surgical site [6].

#### 2.2.2 Tracking modalities

To track surgical instruments and patient's anatomy (define the position and orientation in real time) during naviagated surgery a tracking system is needed. Tracking can be done by different technologies. The most used tracking modality is optical tracking.

### Optical tracking

Optical tracking is the most used tracking modality in navigated liver surgeries. Passive markers (spherical, retro-reflective that reflect infrared light) or active markers (infrared-emitting markers that are activated by an electrical signal) [28] are attached to the objects that need to be tracked. A tracking camera is then emitting infrared light by illuminators on the position sensor (only for passive markers). The position sensor determines the position and orientation of the tracked instruments based on the information it receives from those markers [1].

### 2.3 Surface reconstruction

A surface reconstruction's goal is to create a surface from sampling points. Two main steps need to be processed. First, collecting the sample points. Second, apply a reconstruction algorithm to the sampled points. There exist different methods of collecting surface points [14][18][12][9][13]. Optical (non-contact scan) scans are the most popular ones. Specialty laser based scanners can scan very fast and with a precision in the order of micrometers. Also contact scans exist [23]. Contact scans can also be very precise (in the order of micrometers). The resulting sampling points lie on or near an unknown surface. A reconstruction algorithm has now to reconstruct the surface from these points. Again, a lot of reconstruction algorithms exist [19]. Only a few articles were published in the field of liver surface scanning [21] [26].

## Chapter 3

### Problem Statement



## Chapter 4

# Concept

4.1 System

4.2 Functionalities

4.2.1 Surface Reconstruction

4.2.2 Tumor Segmentation  
(Automatic 3D)

4.2.3 Resection Planning

4.3 Workflow

4.3.1 Resection planning for non-anatomical ...



## Chapter 5

# Implementation

This chapter

### 5.1 Surface Reconstruction

#### 5.1.1 Surface contact detection

#### 5.1.2 Outlier removal

#### 5.1.3 Reconstruction Parameters

grid search

### 5.2 Tumor Segmentation

graph cuts initialization method

### 5.3 Resection Planning

#### 5.3.1 Cone fitting around tumor

### 5.4 Visualization for navigation

#### 5.4.1 Ultrasound overlay

#### 5.4.2 3D model

### 5.5 UI Concept



## Chapter 6

# Experiments

### 6.1 Surface Accuracy on a technical phantom

work presented in this section was presented at CURAC, Luca

#### 6.1.1 Methodology

#### 6.1.2 Results

#### 6.1.3 Discussion

### 6.2 Surface reconstruction on retrospective data

#### 6.2.1 Methodology

Retrospective data from Banz et. al

#### 6.2.2 Results

#### 6.2.3 Discussion

### 6.3 Usability Test

3 surgeons questionnaire surface accuracy (using surface registration)

#### 6.3.1 Methodology

#### 6.3.2 Results

#### 6.3.3 Discussion



## Chapter 7

# Discussion and Conclusions

### 7.1 Discussion

*Interpret your results in the context of past and current studies and literature on the same topic. Attempt to explain inconsistencies or contrasting opinion. Highlight the novelty of your work. Objectively discuss the limitations.*

### 7.2 Conclusions

*Formulate clear conclusions which are supported by your research results.*



## **Chapter 8**

## **Outlook**

*Provide a vision of possible future work to continue and extend your thesis research.*



# Bibliography

- [1] Polaris Spectra and Vicra.
- [2] D. Adalsteinsson and J. A. Sethian. A fast level set method for propagating interfaces. *Journal of Computational Physics*, 118(2):269–277, May 1995.
- [3] R. Akhtar, S. Eichhorn, and P. Mummary. Microstructure-based finite element modelling and characterisation of bovine trabecular bone. *Journal of Bionic Engineering*, 3(1):3–9, Mar. 2006.
- [4] F. A. Alvarez, R. S. Claria, S. Oggero, and E. de Santibañes. Parenchymal-sparing liver surgery in patients with colorectal carcinoma liver metastases. *World journal of gastrointestinal surgery*, 8(6):407, 2016.
- [5] E. Aulisa, S. Manservisi, R. Scardovelli, and S. Zaleski. Interface reconstruction with least-squares fit and split advection in three-dimensional cartesian geometry. *Journal of Computational Physics*, 225(2):2301–2319, Aug. 2007.
- [6] V. M. Banz, P. C. Müller, P. Tinguely, D. Inderbitzin, D. Ribes, M. Peterhans, D. Candinas, and S. Weber. Intraoperative image-guided navigation system: development and applicability in 65 patients undergoing liver surgery. *Langenbeck's archives of surgery*, 401(4):495–502, 2016.
- [7] G. Baroud. High-viscosity cement significantly enhances uniformity of cement filling in vertebroplasty: An experimental model and study on cement leakage., 2006.
- [8] D. Cherqui, E. Husson, R. Hammoud, B. Malassagne, F. Stéphan, S. Bensaid, N. Rotman, and P.-L. Fagniez. Laparoscopic liver resections: a feasibility study in 30 patients. *Annals of surgery*, 232(6):753, 2000.
- [9] L.-C. Chu and C.-C. Chang. Infrared 3d scanning system, Aug. 27 2002. US Patent 6,442,419.
- [10] L. W. Clements, J. A. Collins, J. A. Weis, A. L. Simpson, T. P. Kingham, W. R. Jarnagin, and M. I. Miga. Deformation correction for image guided liver surgery: An intraoperative fidelity assessment. *Surgery*, 162(3):537–547, 2017.
- [11] L. W. Clements, J. A. Collins, Y. Wu, A. L. Simpson, W. R. Jarnagin, and M. I. Miga. Validation of model-based deformation correction in image-guided liver surgery via tracked intraoperative ultrasound: preliminary method and results. In *Medical Imaging 2015: Image-Guided Procedures, Robotic Interventions, and Modeling*, volume 9415, page 94150T. International Society for Optics and Photonics, 2015.
- [12] Y. Cui and D. Stricker. 3d shape scanning with a kinect. In *ACM SIGGRAPH 2011 Posters*, page 57. ACM, 2011.

- [13] M. Dou, J. Taylor, H. Fuchs, A. Fitzgibbon, and S. Izadi. 3d scanning deformable objects with a single rgbd sensor. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 493–501, 2015.
- [14] J. G. D. Franca, M. A. Gazziro, A. N. Ide, and J. H. Saito. A 3d scanning system based on laser triangulation and variable field of view. In *Image Processing, 2005. ICIP 2005. IEEE International Conference on*, volume 1, pages I–425. IEEE, 2005.
- [15] D. Galun, D. Basaric, M. Zuvela, P. Bulajic, A. Bogdanovic, N. Bidzic, and M. Milicevic. Hepatocellular carcinoma: From clinical practice to evidence-based treatment protocols. *World journal of hepatology*, 7(20):2274, 2015.
- [16] H. Hoppe, T. DeRose, T. Duchamp, J. McDonald, and W. Stuetzle. *Surface reconstruction from unorganized points*, volume 26. ACM, 1992.
- [17] R. Lencioni and L. Crocetti. Local-regional treatment of hepatocellular carcinoma. *Radiology*, 262(1):43–58, 2012.
- [18] M. Levoy, K. Pulli, B. Curless, S. Rusinkiewicz, D. Koller, L. Pereira, M. Ginzton, S. Anderson, J. Davis, J. Ginsberg, et al. The digital michelangelo project: 3d scanning of large statues. In *Proceedings of the 27th annual conference on Computer graphics and interactive techniques*, pages 131–144. ACM Press/Addison-Wesley Publishing Co., 2000.
- [19] S. P. Lim and H. Haron. Surface reconstruction techniques: a review. *Artificial Intelligence Review*, 42(1):59–78, 2014.
- [20] A. H. Mahnken, K. E. Wilhelm, J. Ricke, et al. *CT-and MR-guided Interventions in Radiology*, volume 22. Springer, 2009.
- [21] L. Maier-Hein, A. Groch, A. Bartoli, S. Bodenstedt, G. Boissonnat, P.-L. Chang, N. Clancy, D. S. Elson, S. Haase, E. Heim, et al. Comparative validation of single-shot optical techniques for laparoscopic 3-d surface reconstruction. *IEEE transactions on medical imaging*, 33(10):1913–1930, 2014.
- [22] S. McGuire. World cancer report 2014. geneva, switzerland: World health organization, international agency for research on cancer, who press, 2015, 2016.
- [23] D. K. Pai, K. v. d. Doel, D. L. James, J. Lang, J. E. Lloyd, J. L. Richmond, and S. H. Yau. Scanning physical interaction behavior of 3d objects. In *Proceedings of the 28th annual conference on Computer graphics and interactive techniques*, pages 87–96. ACM, 2001.
- [24] M. Peterhans, A. vom Berg, B. Dagon, D. Inderbitzin, C. Baur, D. Candinas, and S. Weber. A navigation system for open liver surgery: design, workflow and first clinical applications. *The International Journal of Medical Robotics and Computer Assisted Surgery*, 7(1):7–16, 2011.
- [25] A. K. Siriwardena, J. M. Mason, S. Mullamitha, H. C. Hancock, and S. Jegatheeswaran. Management of colorectal cancer presenting with synchronous liver metastases. *Nature reviews Clinical oncology*, 11(8):446, 2014.

- [26] S. Thompson, J. Totz, Y. Song, S. Johnsen, D. Stoyanov, S. Ourselin, K. Gurusamy, C. Schneider, B. Davidson, D. Hawkes, et al. Accuracy validation of an image guided laparoscopy system for liver resection. In Medical Imaging 2015: Image-Guided Procedures, Robotic Interventions, and Modeling, volume 9415, page 941509. International Society for Optics and Photonics, 2015.
- [27] G. Torzilli. Ultrasound guided liver surgery. Springer, 2014.
- [28] A. D. Wiles, D. G. Thompson, and D. D. Frantz. Accuracy assessment and interpretation for optical tracking systems. In Medical Imaging 2004: Visualization, Image-Guided Procedures, and Display, volume 5367, pages 421–433. International Society for Optics and Photonics, 2004.

*etc.*



## Appendices



## Appendix A

# Vector and Tensor Mathematics

### A.1 Introduction

...

### A.2 Variable Types

...



## Appendix B

### Another Appendix

B.1 Section 1

...

B.2 Section 2

...