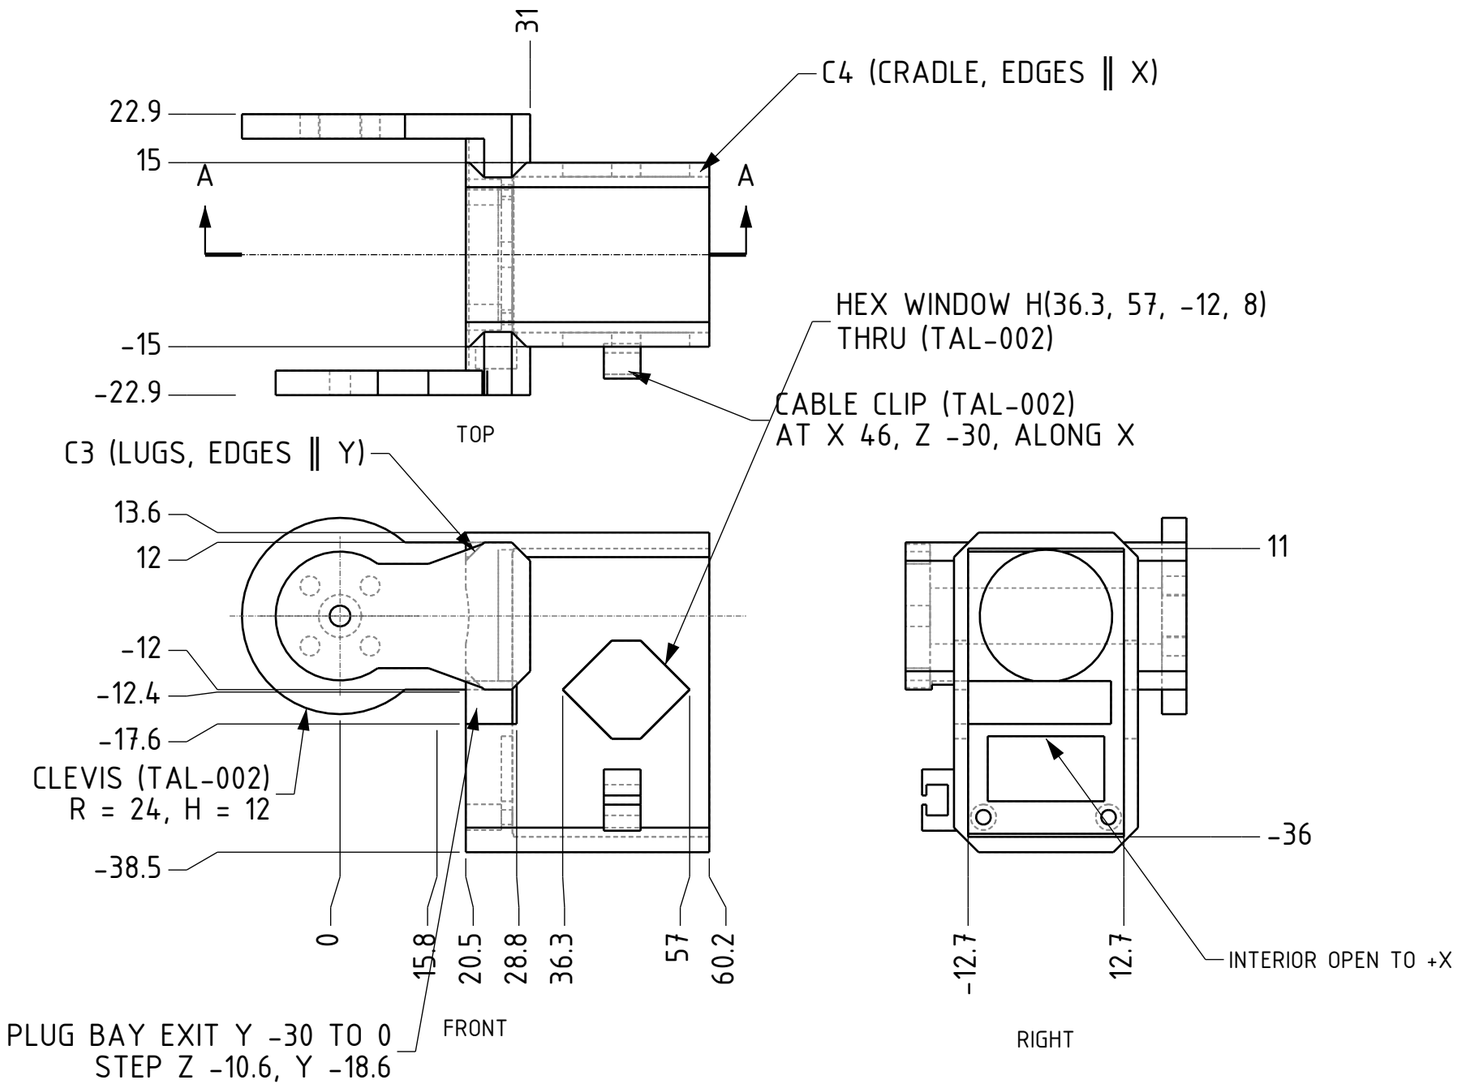


FEATURES (in order)


1. Clevis (TAL-002), R = 24, H = 12.
2. Bridge lugs: box x 20.5 to 31, y ±22.9, z ±12; C3 on the edges parallel to Y.
3. Cradle: box x 20.5 to 60.2, y ±15, z -38.5 to 13.6; C4 on the edges parallel to X.
4. Cable clip (TAL-002) on the -Y face: centre (46, -15.2, -30), cable along X.
5. Clevis gap cut (TAL-002).
6. Pocket P (sheet TAL-001) with its servo frame origin P0 at (44.3, 0, 0): servo +Z (shaft) along +X, servo +X along +Z (body hangs down), servo +Y along -Y.
7. Cradle interior: cut box x 28.3 to the +X end, y ±12.7, z -36 to 11.
8. Plug bay exit to -Y: cut boxes x 15.8 to 28.8: y -18.6 to 0, z -17.6 to -10.6; and y -30 to 0, z -17.6 to -12.4.
9. Side windows: hex window H(36.3, 57, -12, 8) through Y (TAL-002).
10. Case screw holes (TAL-002, seat 18.0), connector face only, from the back wall: (y, z) = (±10.2, -32.8).

NOTES


- All dimensions mm. Third-angle projection. Do not scale the drawing.
- Part frame = the frame the part is built in, in talos_arm.py (given on each sheet).
- Printed tolerance +/-0.2 unless noted; servo pocket clearances are already included.
- Fit the roll servo's case screws before the gripper goes on.

THIRD ANGLE PROJECTION

WORK SET B: forearm, wrist, gripper, moving jaw, idler plates	
PROJECT TALOS 5-axis arm	EST. MASS 29 g
PART Wrist (part sheet 1 of 2)	SCALE 1:1
PART NO. TAL-105	UNITS / REV mm / A
QTY / ARM 1	DATE 2026-11-05
MATERIAL PLA, 20 % infill, 3 perimeters	SHEET 14 of 21

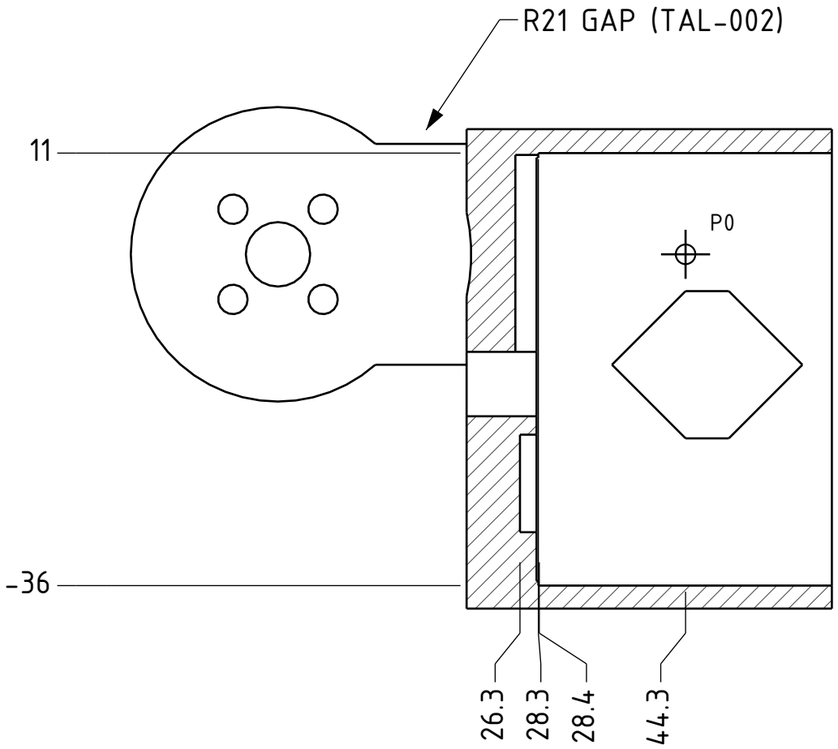

SECTION A-A

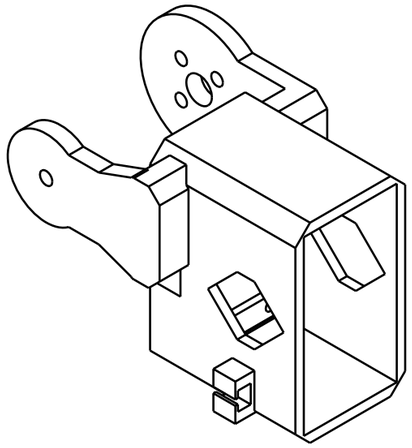

ISOMETRIC (NOT TO SCALE)


SECTION A-A AND LEFT VIEW

A-A: XZ plane (cutting line on sheet 1), looking toward +Y. P0 = pocket P servo frame origin.

Left view: the cradle back wall, seen from -X between the clevis plates.

NOTES

- All dimensions mm. Third-angle projection. Do not scale the drawing.

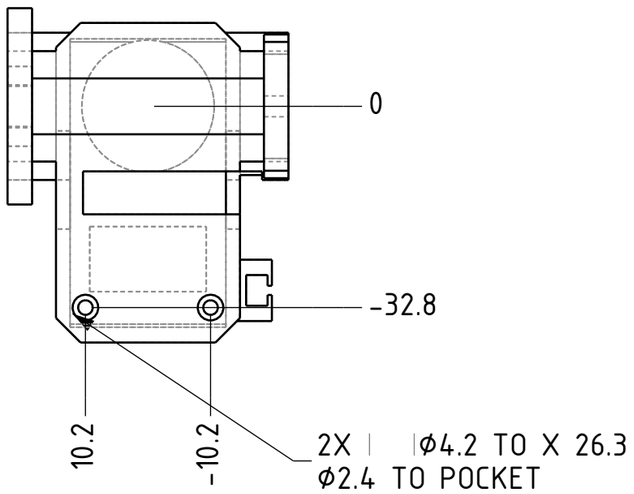

LEFT SCALE 1:1

THIRD ANGLE PROJECTION

WORK SET B: forearm, wrist, gripper, moving jaw, idler plates	
PROJECT TALOS 5-axis arm	EST. MASS -
PART Wrist (part sheet 2 of 2)	SCALE 3:2
PART NO. TAL-105	UNITS / REV mm / A
QTY / ARM 1	DATE 2026-11-05
MATERIAL PLA, 20 % infill, 3 perimeters	SHEET 15 of 21