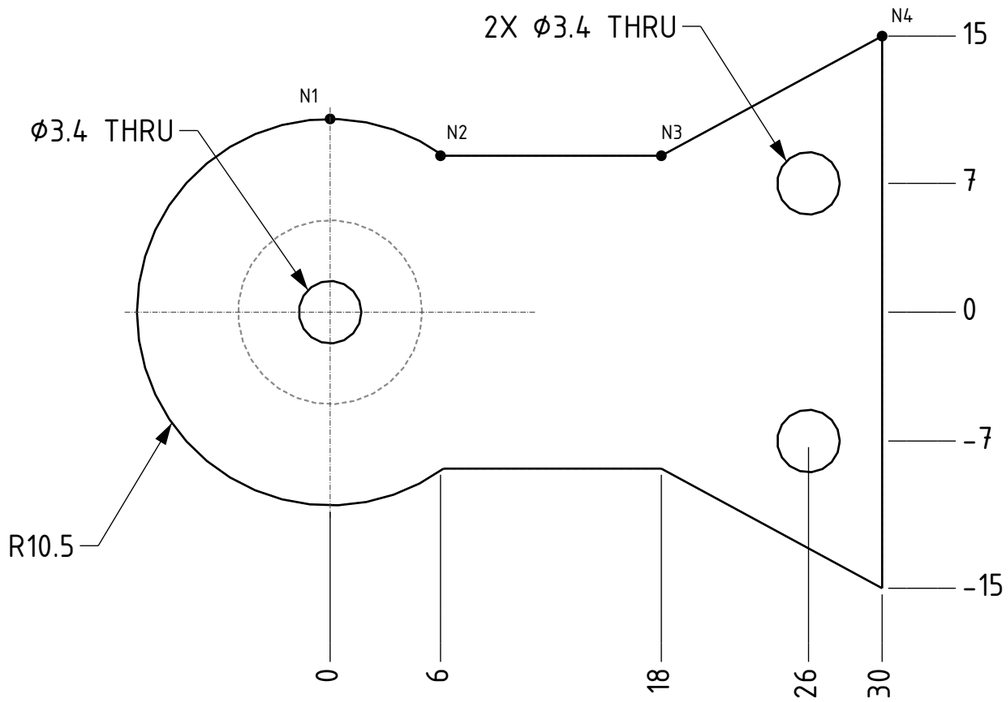

FRONT (OUTER FACE, -Y)

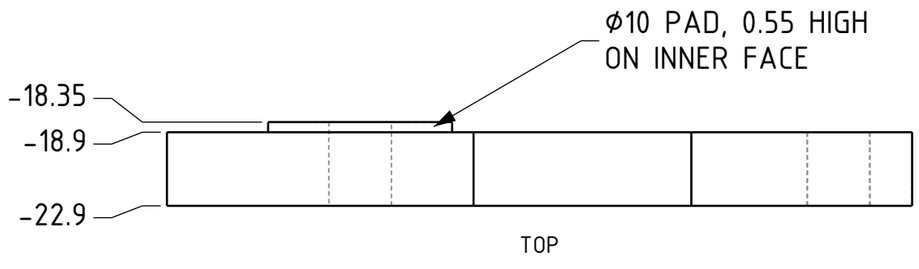

TOP

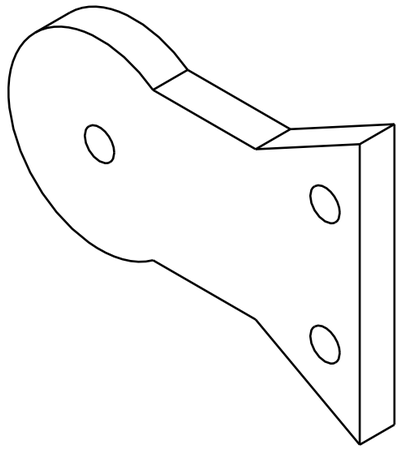

ISOMETRIC (NOT TO SCALE)

NECK POINTS (X, Z), MIRRORED IN Z

PT	X	Z
N1	0	±10.5
N2	6	±8.5
N3	18	±8.5
N4	30	±15

FEATURES (in order)

1. Plate, y -22.9 to -18.9: circle R10.5 at the origin + neck polygon N1 to N4 (mirrored in Z). Same outline as the idler plate on TAL-002.
2. Pad ⌀10 on the inner face, y -18.9 to -18.35.
3. Centre hole ⌀3.4 through (M3 × 8 into the servo's idler boss).
4. Tab holes: 2X ⌀3.4 through at x 26, z ±7 (M3 × 10 into the arm link).

NOTES

- All dimensions mm. Third-angle projection. Do not scale the drawing.
- Part frame = the frame the part is built in, in talos_arm.py (given on each sheet).
- Printed tolerance +/-0.2 unless noted; servo pocket clearances are already included.
- One on each arm link (TAL-103, TAL-104). It sits in the pocket on the link's -Y side, held by 2X M3 × 10 button heads; the centre M3 × 8 goes into the servo's idler boss, under hub cap TAL-109.
- Print outer face down (4.55 high, no support).

THIRD ANGLE PROJECTION

WORK SET B: forearm, wrist, gripper, moving jaw, idler plates

PROJECT TALOS 5-axis arm	EST. MASS 3 g
PART Idler plate	SCALE 3:1
PART NO. TAL-110	UNITS / REV mm / A
QTY / ARM 2	DATE 2026-11-05
MATERIAL PLA, 20 % infill, 3 perimeters	SHEET 21 of 21