

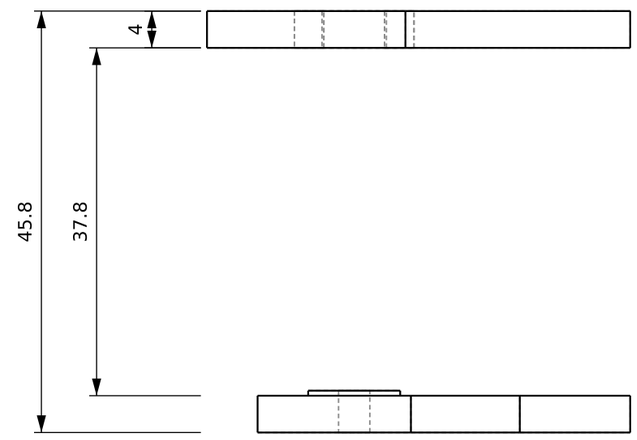



TOP

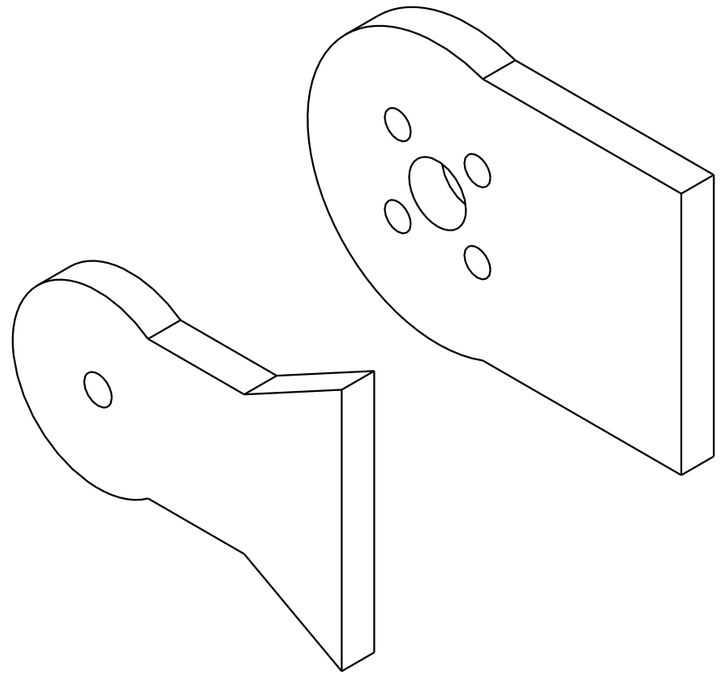

ISOMETRIC (NOT TO SCALE)

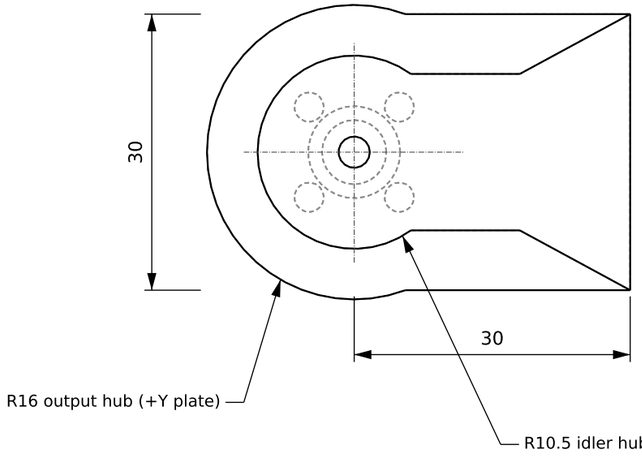


FRONT



RIGHT

## COMMON FEATURES

CLEVIS (every pitch joint; drawn for the arm links: reach R = 30, half-height H = 15; wrist uses R = 24, H = 12). Plates are 4 thick, normal to Y.

1. Output plate, y 18.9..22.9: circle R16 at the origin + rectangle x 0..R, z -H..H.
2. Output plate holes, through: centre dia 7 (horn spline screw access) + 4x dia 3.2 at (x, z) = (+/-4.9, +/-4.9) (PCD 13.86, 45 deg).
3. Idler plate, y -22.9..-18.9: circle R10.5 + neck polygon (0,10.5) (6,8.5) (0.6R,8.5) (R,H) (R,-H) (0.6R,-8.5) (6,-8.5) (0,-10.5). The neck clears the parent servo's bus plugs.
4. Idler plate: pad dia 10 on the inner face, y -18.9..-18.35; centre hole dia 3.4 through.
5. Clevis gap in the link body: remove a cylinder R21 about Y between y -18.9..18.9, and everything at x < 0 between those planes.

CASE SCREW HOLE (servo case, M2 self-tapping): dia 2.4 from the servo face to the seat, dia 4.2 counterbore from the seat outward. Seat = distance from the servo mid-plane: arm shells and gripper 17.3, shoulder 18.5, base 18.4, wrist 18.0.

HORN SCREW PATTERN: 4x on PCD 13.86 at 45/135/225/315 deg + centre. Clearance dia 3.2 (M3); counterbore dia 6.5 where the head sits inside a part.

CABLE CLIP (one bus cable; local u = along cable, v = across, w = out of the face): block u -3..3, v -5..5, w -1..5 (1 mm sunk into the face); tunnel u through, v -2.5..2.5, w 0.8..4.3; slit v -0.75..0.75, w 4.2..6; chamfer 1 on the two outer long edges.

HEX WINDOW H(xa, xb, zc, k): hexagon (xa,zc) (xa+k,zc-k) (xb-k,zc-k) (xb,zc) (xb-k,zc+k) (xa+k,zc+k), cut through the part along Y.

## NOTES

- All dimensions mm. Third-angle projection. Do not scale the drawing.
- Part frame = the frame the part is built in, in talos_arm.py (given on each sheet).
- Printed tolerance +/-0.2 unless noted; servo pocket clearances are already included.

THIRD ANGLE

| | |
|---|---|
| PROJECT<br>TALOS 5-axis arm | EST. MASS<br>- |
| PART<br>**Common features: clevis, clip, screw holes** | SCALE<br>3:2 |
| PART NO.<br>**TAL-002** | UNITS / REV<br>mm / A |
| QTY / ARM<br>- | DATE<br>2026-11-03 |
| MATERIAL<br>PLA, 20 % infill, 3 perimeters | SHEET<br>3 of 12 |