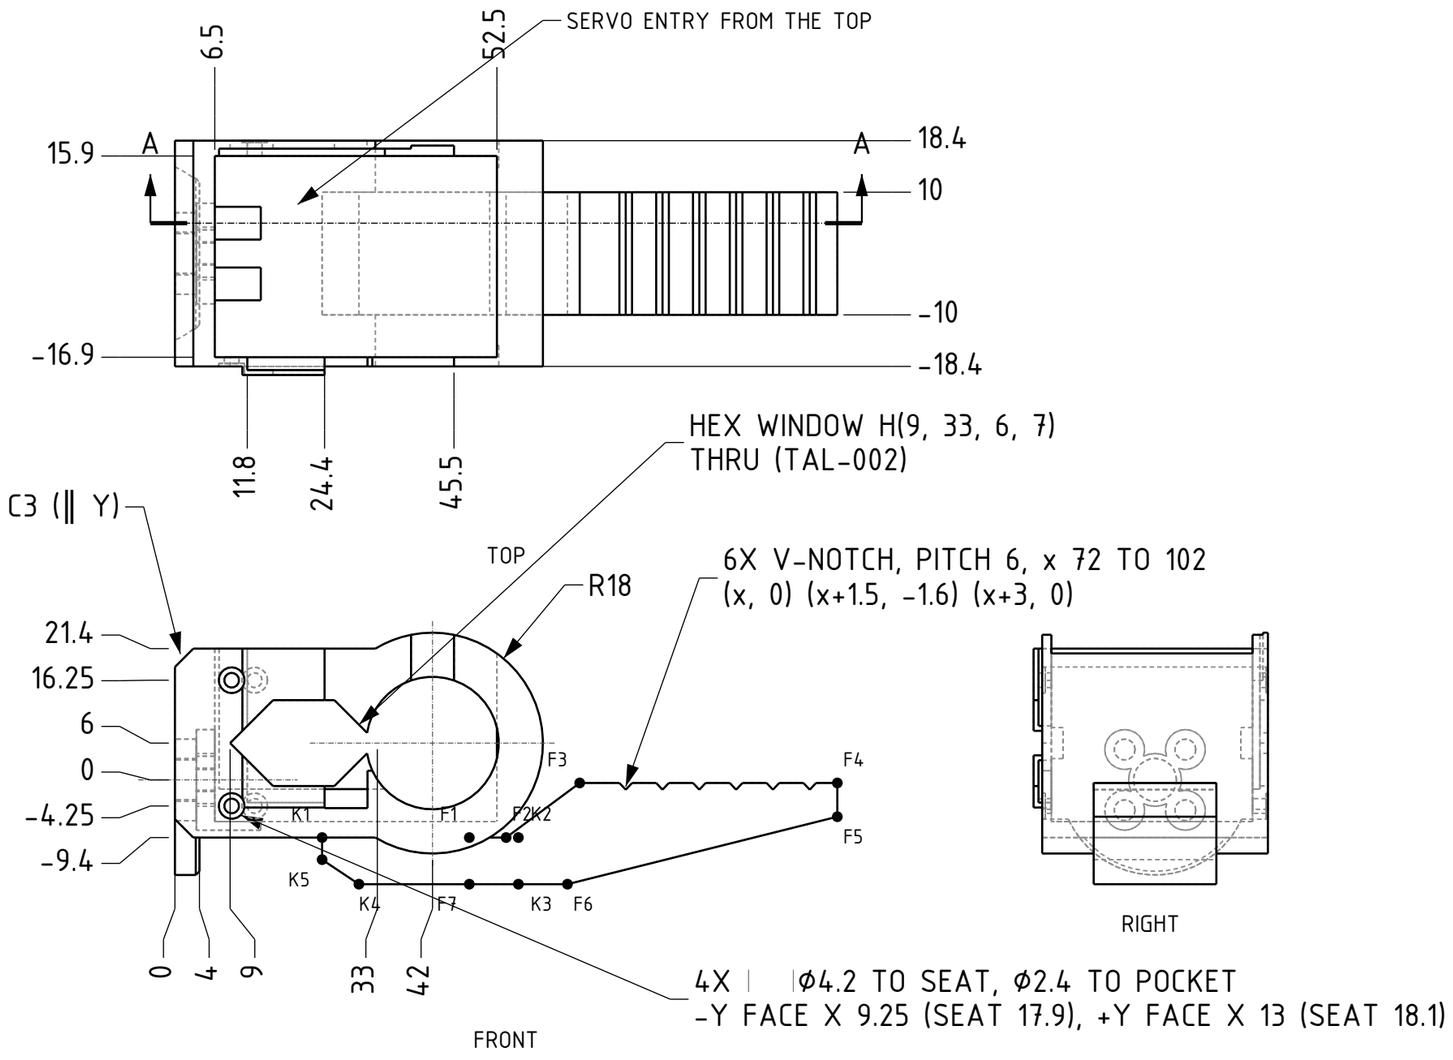


KEEL K AND FINGER F PROFILES (X, Z), Y ±10

PT	X	Z
K1	24	-9.4
K2	56	-9.4
K3	56	-17
K4	30	-17
K5	24	-13
F1	48	-9.4
F2	54	-9.4
F3	66	-0.5
F4	108	-0.5
F5	108	-6
F6	64	-17
F7	48	-17

FEATURES (in order)


1. Disc ⌀31 along X, x 0 to 4; C0.6 on the front edge.
2. Housing: box x 0 to 42, y ±18.4, z -9.4 to 21.4; C3 on the edges parallel to Y; plus a cylinder R18 about Y at (x, z) = (42, 6).
3. Keel K1 to K5 and finger F1 to F7, each extruded y ±10.
4. Doubler on the -Y wall: box x 11 to 25.6, y -19.8 to -18.4, z -4.5 to 21.4 (leaves 0.8 over the bump channel).
5. Pocket P (sheet TAL-001) with its servo frame origin P0 at (42, 0, 6): servo +Z (shaft) along +Y, servo +X along +X, servo +Y along -Z.
6. Servo entry from the top (pocket P run on up, TAL-001; horns off): case box x 6.5 to 52.5, y -16.9 to 15.9, z -6.8 up (opens the top over the whole servo). +Y wall: rib channel x 7.2 to 38.5, y 15.5 to 17.1, z -1.5 up; spline slot x 42 ±3.5, y to 17.6, z 6 up. -Y wall: bump channel x 11.8 to 24.8, y -19 to -16.5, z -3.7 up; plug window x 24.4 to 31.4, z -4.6 up; notch through the wall x 24.4 to 45.5, z 6 up (joins the plug window and the idler hole).
7. Side windows: hex window H(9, 33, 6, 7) through Y (TAL-002).
8. Grip notches: 6X triangle (x, 0) (x+1.5, -1.6) (x+3, 0), x = 72, 78 … 102, through Y.
9. Roll horn (sheet 2): ⌀7 centre, x -1 to 7. 4X ⌀3.4 on ⌀14 PCD at 45°, x -1 to 3.5, counterbore ⌀6.5 from x 3.5 to 7 (M3 × 6 from inside the housing, with the short leg of a 2 mm hex key); the two counterbores at z -4.95 run on to x 14, as grooves in the pocket floor, so those screws can be laid in; centre opened to ⌀8.6 from x 3.5 to 7 (no thin web between the counterbores and the centre hole).
10. Case screw holes (TAL-002): +Y face (seat 18.1) at x 13, z -4.25 and 16.25; -Y face (seat 17.9) at x 9.25, z -4.25 and 16.25.

NOTES


- All dimensions mm. Third-angle projection. Do not scale the drawing.
- Part frame = the frame the part is built in, in talos_arm.py (given on each sheet).
- Printed tolerance +/-0.2 unless noted; servo pocket clearances are already included.
- Fit the jaw servo from the top, shaft to +Y, with both horns off; then the case screws (2X M2 × 6 on +Y, 2X M2 × 5 on -Y) and refit the horns.
- The jaw servo's bus plugs come out through the -Y housing wall.
- Print: standing on the roll-horn disc; no support (one 32 mm bridge at the front of the servo opening); use a brim, the part is 108 tall.

THIRD ANGLE PROJECTION

WORK SET B: forearm, wrist, gripper, moving jaw, idler plates	
PROJECT TALOS 5-axis arm	EST. MASS 29 g
PART Gripper body (with fixed jaw) (part sheet 1 of 2)	SCALE 1:1
PART NO. TAL-106	UNITS / REV mm / A
QTY / ARM 1	DATE 2026-11-10
MATERIAL PLA, 20 % infill, 3 perimeters	SHEET 16 of 21

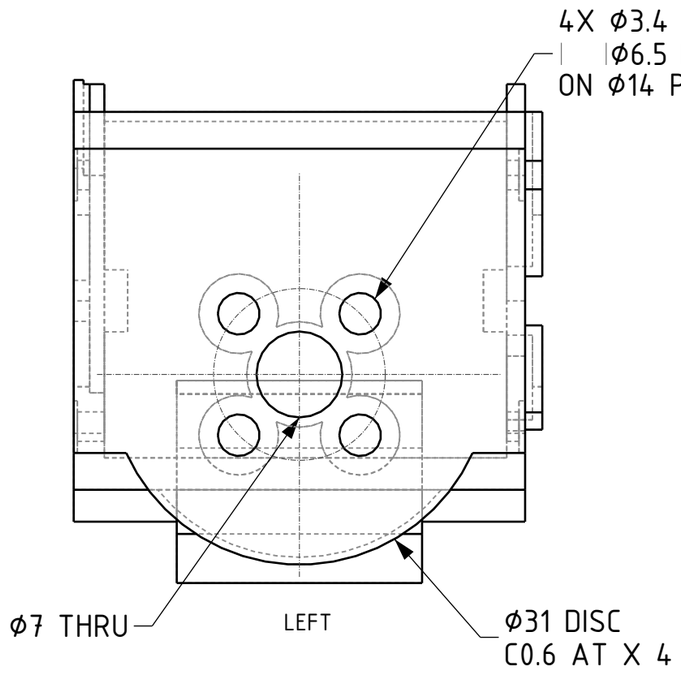

LEFT

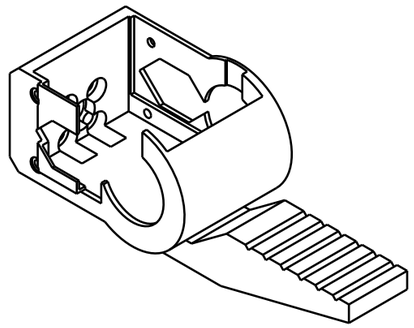

ISOMETRIC (NOT TO SCALE)


LEFT VIEW AND SECTION A-A

Left view: the disc face (roll horn side), seen from -X.

A-A: plane y 4.95 through two roll horn screws (cutting line on sheet 1, top view), looking toward +Y.

NOTES

- All dimensions mm. Third-angle projection. Do not scale the drawing.

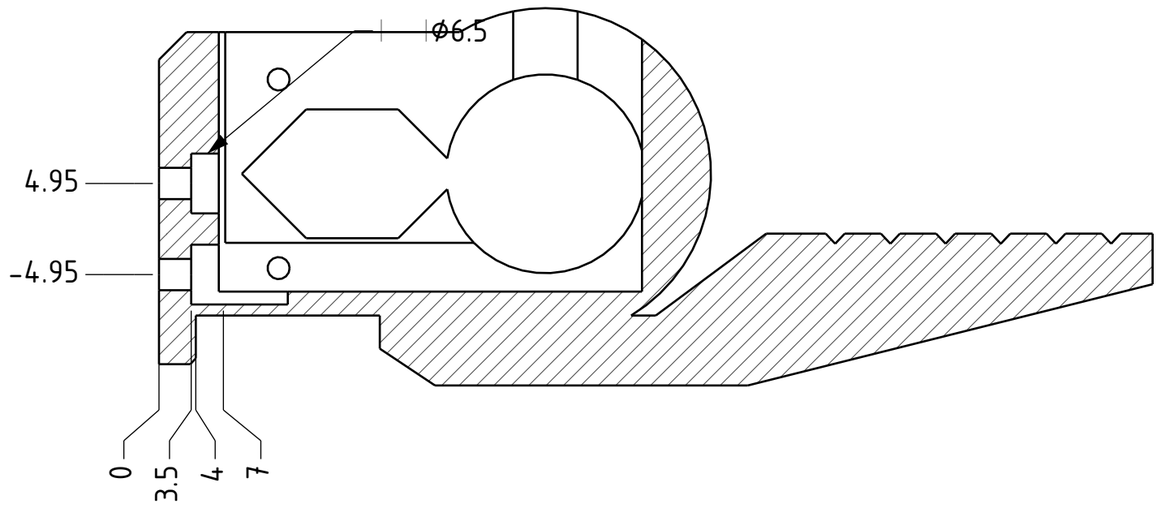

SECTION A-A SCALE 3:2

THIRD ANGLE PROJECTION

WORK SET B: forearm, wrist, gripper, moving jaw, idler plates	
PROJECT TALOS 5-axis arm	EST. MASS -
PART Gripper body (with fixed jaw) (part sheet 2 of 2)	SCALE 2:1
PART NO. TAL-106	UNITS / REV mm / A
QTY / ARM 1	DATE 2026-11-10
MATERIAL PLA, 20 % infill, 3 perimeters	SHEET 17 of 21