




ISOMETRIC (NOT TO SCALE)

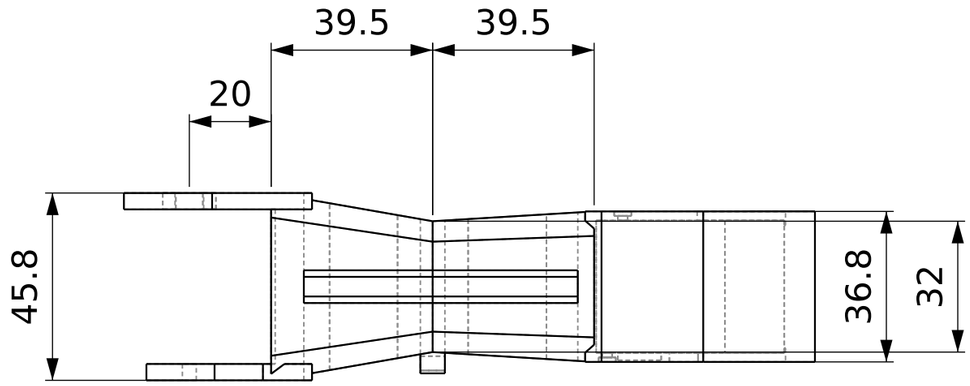

TOP

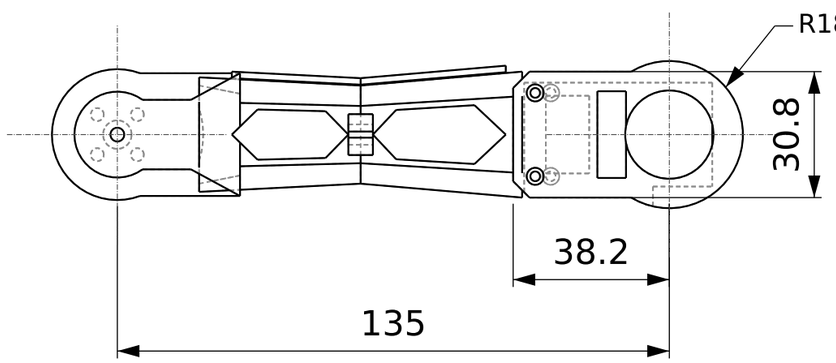

FRONT



RIGHT

FEATURES (in order)

1. Clevis (TAL-002), reach 30, half-height 15.
2. Beam: ruled loft of YZ sections, x 20: 45.8 wide x 28 tall, corners chamfered 6; x 59.5: 32 wide x 24 tall, corners chamfered 5; x 99: 36.8 wide x 30.8 tall, corners chamfered 6.
3. Servo shell: XZ polygon (100.8,-15.4) (135,-15.4) (135,15.4) (100.8,15.4) (96.8,11.4) (96.8,-11.4), extruded y -18.4..18.4; plus a cylinder R18 about Y at x = 135, y -18.4..18.4.
4. Spine: ruled loft of the ridge profile through the same three stations, then trimmed to x 28..95. Ridge profile at beam height h: (-4,h/2-3) (4,h/2-3) (4,h/2+0.2) (2.4,h/2+1.8) (-2.4,h/2+1.8) (-4,h/2+0.2).
5. Window 1, cut through Y: (28,0) (34.3,6.14) (50.92,5.72) (56.5,0) (50.92,-5.72) (34.3,-6.14).
6. Window 2, cut through Y: (62.5,0) (68.18,6.03) (87.34,7.19) (95,0) (87.34,-7.19) (68.18,-6.03).
7. Cable clip (TAL-002) on the -Y flank at the waist: centre (59.5, -16.2, 0), cable along X.
8. Clevis gap cut (TAL-002).
9. Servo pocket P (sheet TAL-001) with the servo frame origin at (135, 0, 0); servo +Z (shaft) -> +Y, servo +X -> +X, servo +Y -> -Z.
10. Servo opening (drops in from below): cut box x 99.5..131, y -16.2..16.2, z -40..-12.
11. Case screw holes (sheet TAL-002): seat 17.3; shaft face (+Y) at (x, z) = (106, +/-10.2); connector face (-Y) at (102.2, +/-10.2). Each is a dia 2.4 hole from the servo face to the seat, then a dia 4.2 counterbore from the seat outward through the part.

NOTES

- All dimensions mm. Third-angle projection. Do not scale the drawing.
- Part frame = the frame the part is built in, in talos_arm.py (given on each sheet).
- Printed tolerance +/-0.2 unless noted; servo pocket clearances are already included.
- The wrist flex servo's bus plugs come out through the -Y shell wall.

THIRD ANGLE PROJECTION

WORK SET B: forearm, wrist, gripper, moving jaw	
PROJECT TALOS 5-axis arm	EST. MASS 56 g
PART **Forearm**	SCALE 2:3
PART NO. **TAL-104**	UNITS / REV mm / A
QTY / ARM 1	DATE 2026-11-04
MATERIAL PLA, 20 % infill, 3 perimeters	SHEET 7 of 12