

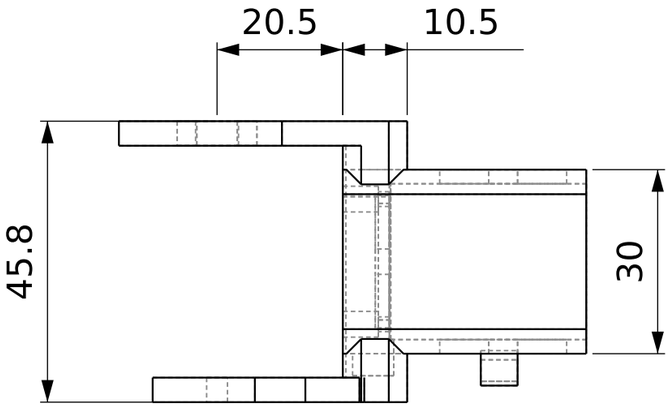



TOP

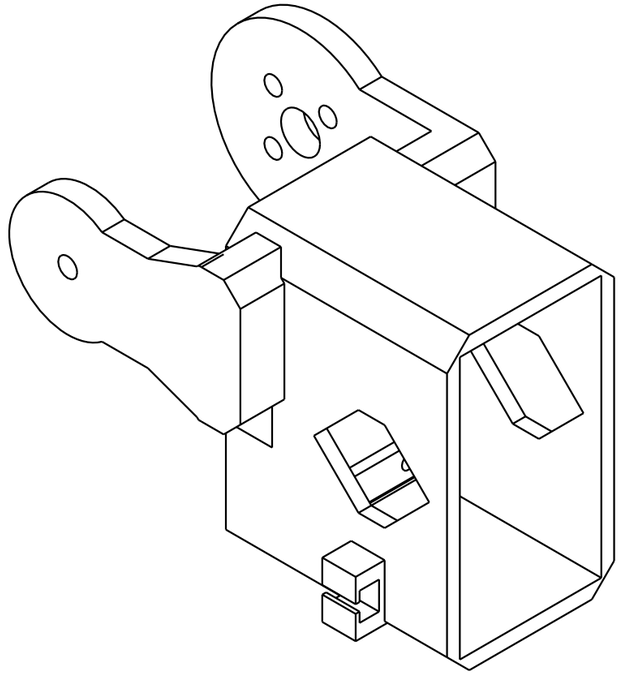

ISOMETRIC (NOT TO SCALE)

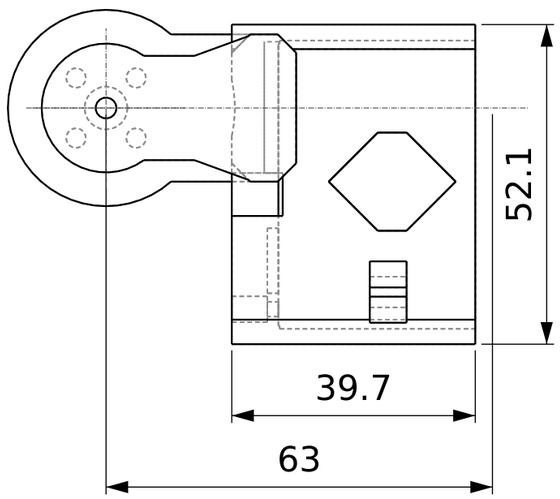

FRONT

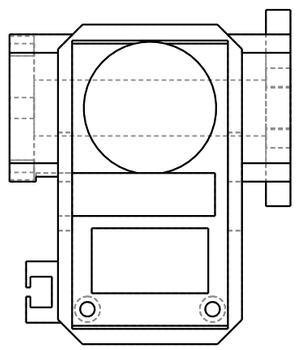

RIGHT

FEATURES (in order)

1. Clevis (TAL-002), reach 24, half-height 12.
2. Bridge lugs: box x 20.5..31, y -22.9..22.9, z -12..12; chamfer 3 on edges parallel to Y.
3. Cradle: box x 20.5..60.2, y -15..15, z -38.5..13.6; chamfer 4 on edges parallel to X.
4. Cable clip (TAL-002) on the -Y face: centre (46, -15.2, -30), cable along X.
5. Clevis gap cut (TAL-002).
6. Servo pocket P (sheet TAL-001) with the servo frame origin at (44.3, 0, 0); servo +Z (shaft) -> +X, servo +X -> +Z (body hangs down), servo +Y -> -Y.
7. Cradle interior: cut box x 28.3..80, y -12.7..12.7, z -36..11.
8. Plug bay exit to -Y: cut box x 15.8..28.8, y -18.6..0, z -17.6..-10.6, and box x 15.8..28.8, y -30..0, z -17.6..-12.4.
9. Side windows: hex window H(36.3, 57, -12, 8) through Y (TAL-002).
10. Case screw holes (sheet TAL-002): connector face only, seat 18.0: (y, z) = (+/-10.2, -32.8); hole x 26.3..28.4, counterbore from x 26.3 toward -X. Each is a dia 2.4 hole from the servo face to the seat, then a dia 4.2 counterbore from the seat outward through the part.

NOTES

- All dimensions mm. Third-angle projection. Do not scale the drawing.
- Part frame = the frame the part is built in, in talos_arm.py (given on each sheet).
- Printed tolerance +/-0.2 unless noted; servo pocket clearances are already included.
- Fit the roll servo's case screws before the gripper goes on.

THIRD ANGLE PROJECTION

WORK SET B: forearm, wrist, gripper, moving jaw	
PROJECT TALOS 5-axis arm	EST. MASS 29 g
PART **Wrist**	SCALE 1:1
PART NO. **TAL-105**	UNITS / REV mm / A
QTY / ARM 1	DATE 2026-11-04
MATERIAL PLA, 20 % infill, 3 perimeters	SHEET 8 of 12