

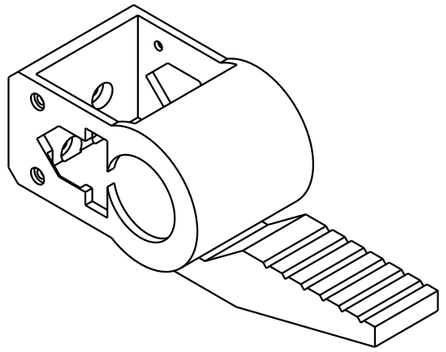


ISOMETRIC (NOT TO SCALE)

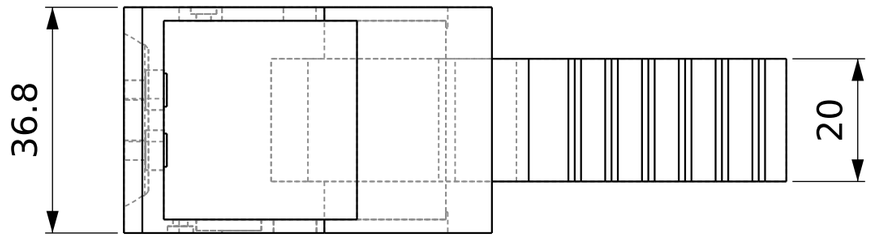

TOP

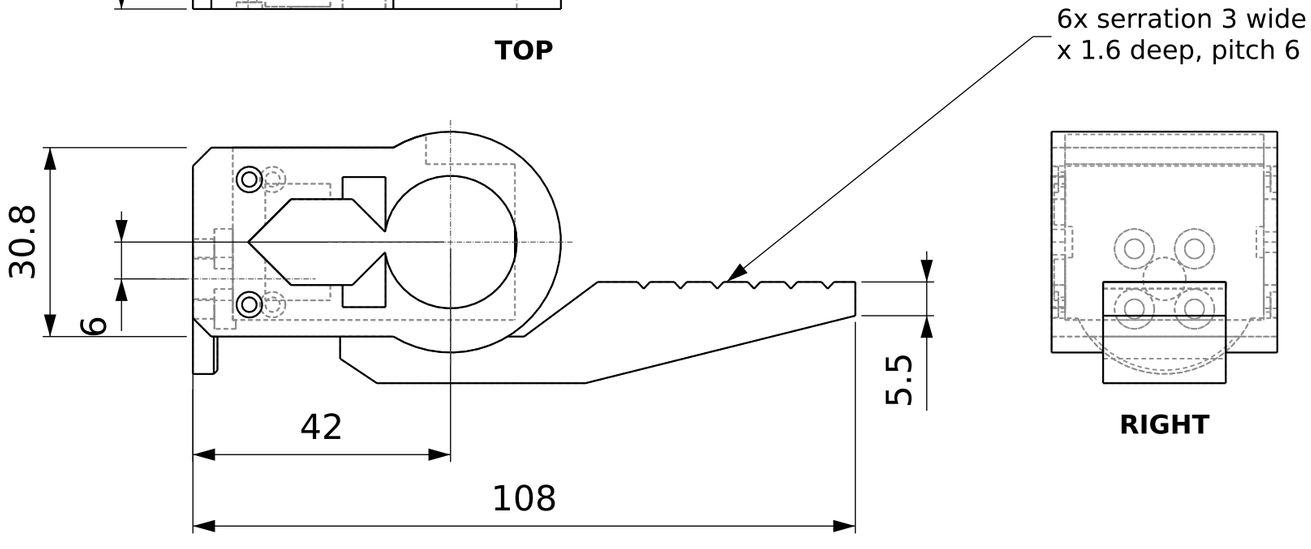

FRONT

RIGHT

FEATURES (in order)

1. Disc: cylinder dia 31 along X, x 0..4; chamfer 0.6 on the front edge.
2. Housing: box x 0..42, y -18.4..18.4, z -9.4..21.4; chamfer 3 on edges parallel to Y; plus cylinder R18 about Y at (x, z) = (42, 6).
3. Keel, y -10..10: XZ polygon (24,-9.4) (56,-9.4) (56,-17) (30,-17) (24,-13).
4. Fixed finger, y -10..10: (48,-9.4) (54,-9.4) (66,-0.5) (108,-0.5) (108,-6) (64,-17) (48,-17).
5. Servo pocket P (sheet TAL-001) with the servo frame origin at (42, 0, 6); servo +Z (shaft) -> +Y, servo +X -> +X, servo +Y -> -Z.
6. Servo opening (from the top): cut box x 6.5..38, y -16.2..16.2, z 18..36.
7. Side windows: hex window H(9, 33, 6, 7) through Y (TAL-002).
8. Grip serrations: 6x triangle (x,0) (x+1.5,-1.6) (x+3,0) for x = 72, 78 ... 102, through Y.
9. Roll horn: centre dia 7, x -1..7. 4x dia 3.2 at (y, z) = (+/-4.9, +/-4.9), x -1..3.5, counterbore dia 6.5 x 3.5..7 (M3 x 6 from inside the housing).
10. Case screw holes (sheet TAL-002): seat 17.3; shaft face (+Y) at (x, z) = (13, -4.2) and (13, 16.2); connector face (-Y) at (9.2, -4.2) and (9.2, 16.2). Each is a dia 2.4 hole from the servo face to the seat, then a dia 4.2 counterbore from the seat outward through the part.

NOTES

- All dimensions mm. Third-angle projection. Do not scale the drawing.
- Part frame = the frame the part is built in, in talos_arm.py (given on each sheet).
- Printed tolerance +/-0.2 unless noted; servo pocket clearances are already included.
- The jaw servo's bus plugs come out through the -Y housing wall.

THIRD ANGLE PROJECTION

WORK SET B: forearm, wrist, gripper, moving jaw	
PROJECT TALOS 5-axis arm	EST. MASS 31 g
PART **Gripper body (with fixed jaw)**	SCALE 1:1
PART NO. **TAL-106**	UNITS / REV mm / A
QTY / ARM 1	DATE 2026-11-04
MATERIAL PLA, 20 % infill, 3 perimeters	SHEET 9 of 12