

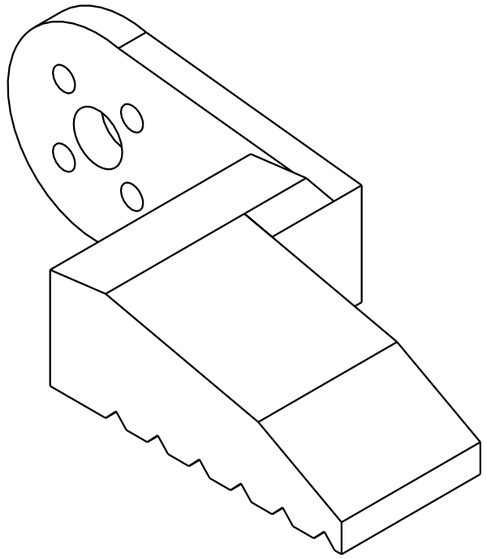



ISOMETRIC (NOT TO SCALE)

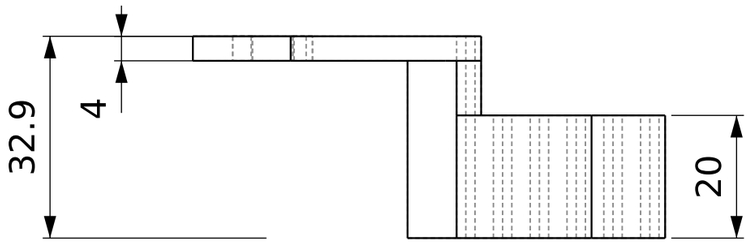

TOP

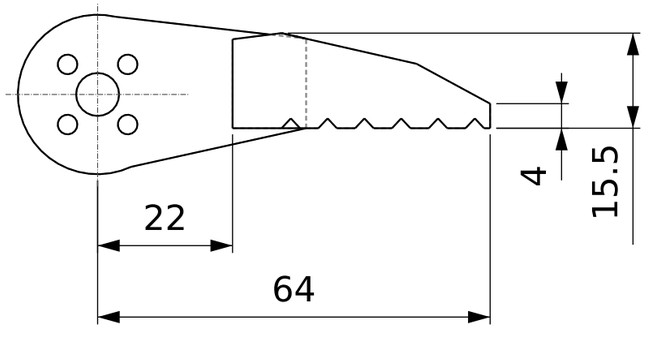

FRONT



RIGHT

FEATURES (in order)

1. Plate, y 18.9..22.9: circle R13 + polygon (0,-13) (34,-5.5) (34,9.1) (0,13).
2. Finger, y -10..10: (22,-5.5) (64,-5.5) (64,-1.5) (52,5) (30,10) (22,9).
3. Knuckle, y 10..18.9: (22,-5.5) (34,-5.5) (34,9.1) (30,10) (22,9).
4. Grip serrations: 6x triangle (x,-5.5) (x+1.5,-3.9) (x+3,-5.5) for x = 30, 36 ... 60, through Y.
5. Horn holes through the plate: centre dia 7 + 4x dia 3.2 at (x, z) = (+/-4.9, +/-4.9).

NOTES

- All dimensions mm. Third-angle projection. Do not scale the drawing.
- Part frame = the frame the part is built in, in talos_arm.py (given on each sheet).
- Printed tolerance +/-0.2 unless noted; servo pocket clearances are already included.
- Bolts to the jaw servo's output horn with 4x M3 x 6; closed position is jaw X along the gripper X.

THIRD ANGLE PROJECTION

WORK SET B: forearm, wrist, gripper, moving jaw	
PROJECT TALOS 5-axis arm	EST. MASS 11 g
PART **Moving jaw**	SCALE 1:1
PART NO. **TAL-107**	UNITS / REV mm / A
QTY / ARM 1	DATE 2026-11-04
MATERIAL PLA, 20 % infill, 3 perimeters	SHEET 10 of 12