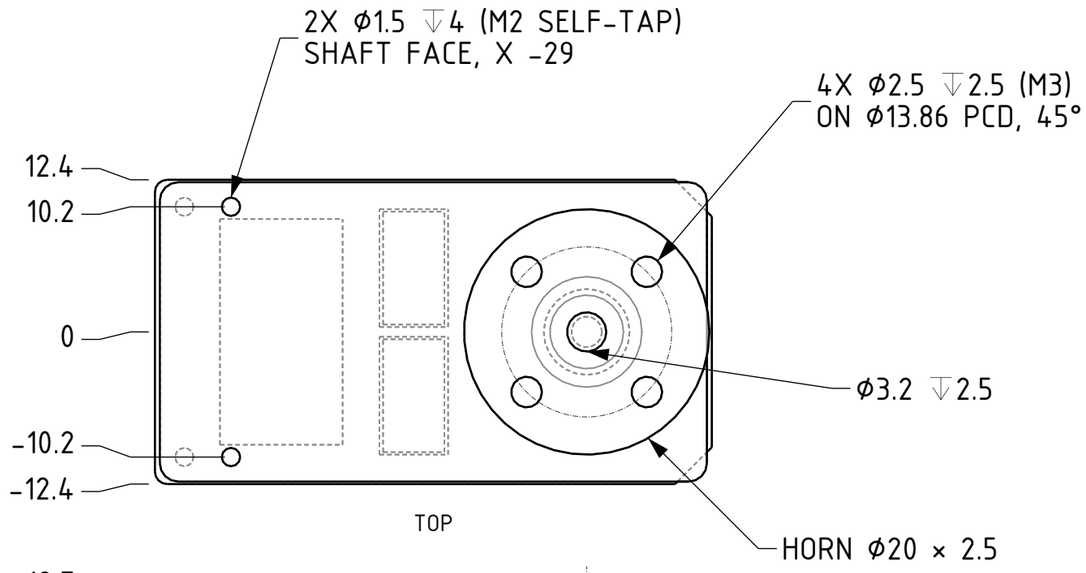

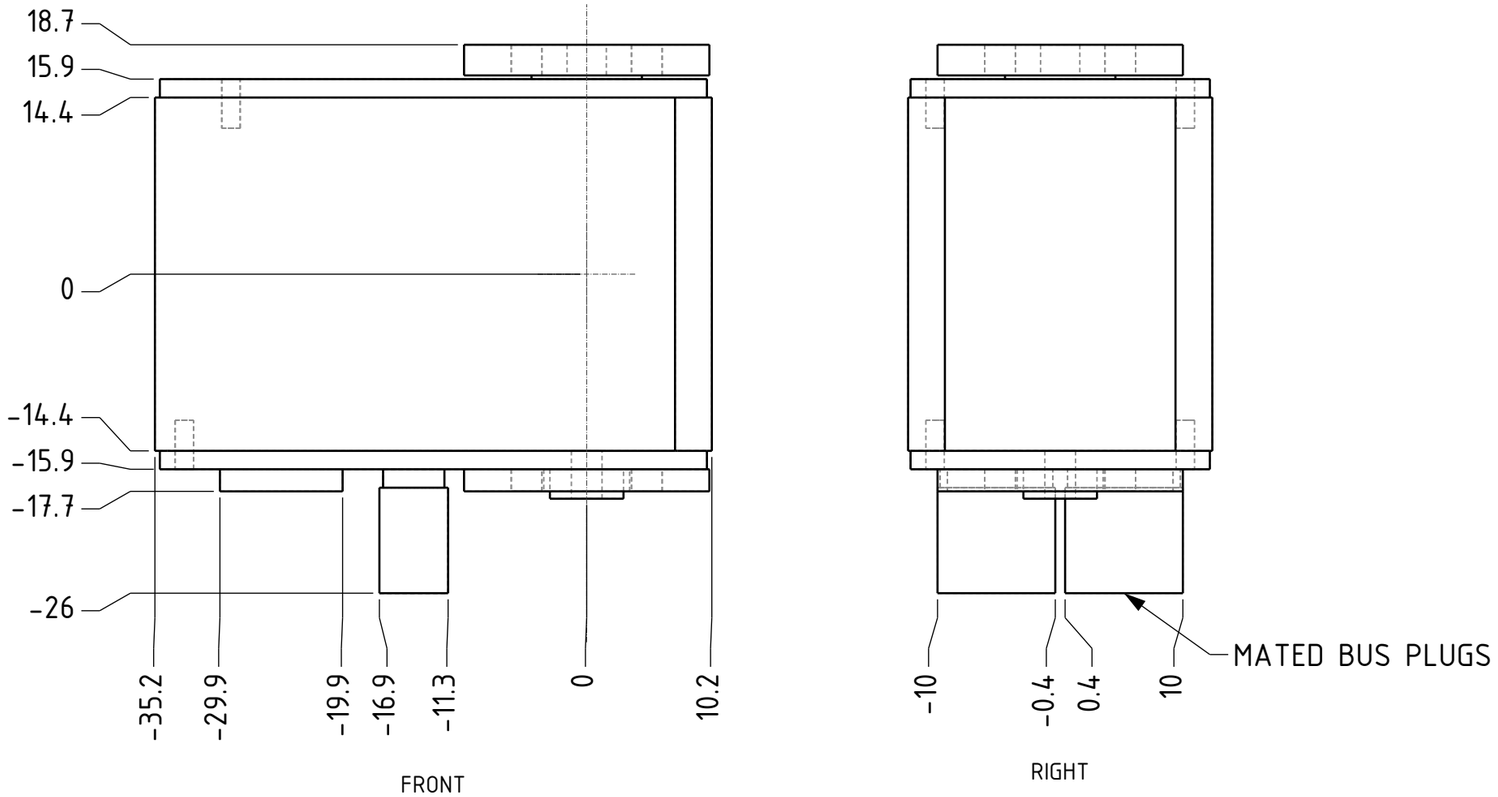

SERVO (servo frame)

1. Body 45.4 × 24.8 × 28.8, x −35.2 to 10.2; +X end corners C3, −X end corners R1.
2. Caps 44.6 × 24.4 × 1.5, corners R1.5, centred on x −12.5, on both faces.
3. Back pad (connector face) x −29.9 to −19.9, y ±9.2, 1.8 high.
4. Bus headers x −16.6 to −11.6, y 0.6 to 9.8 and −9.8 to −0.6; mated plugs to z −26.
5. Output horn ⌀20 × 2.5 (z 16.2 to 18.7): 4X ⌀2.5 M3 on ⌀13.86 PCD at 45°, centre ⌀3.2.
6. Passive horn ⌀20 × 1.8 on the connector face, centre ⌀7.
7. Case holes ⌀1.5 ↧4 (M2 self-tap): shaft face at (−29, ±10.2), connector face at (−32.8, ±10.2).

NOTES

- Bought part: dimensions for reference, measured from the SO-ARM100 STS3215 model and Feetech's drawing. Check the connector position and case-hole depth on a real servo.
- Sheet 2 gives pocket P, the clearance envelope that every servo part cuts.

THIRD ANGLE PROJECTION

REFERENCE SHEET: in work sets A and B	
PROJECT TALOS 5-axis arm	EST. MASS -
PART STS3215 servo (reference) (part sheet 1 of 2)	SCALE 2:1
PART NO. TAL-001	UNITS / REV mm / A
QTY / ARM 6	DATE 2026-11-06
MATERIAL bought part	SHEET 2 of 21

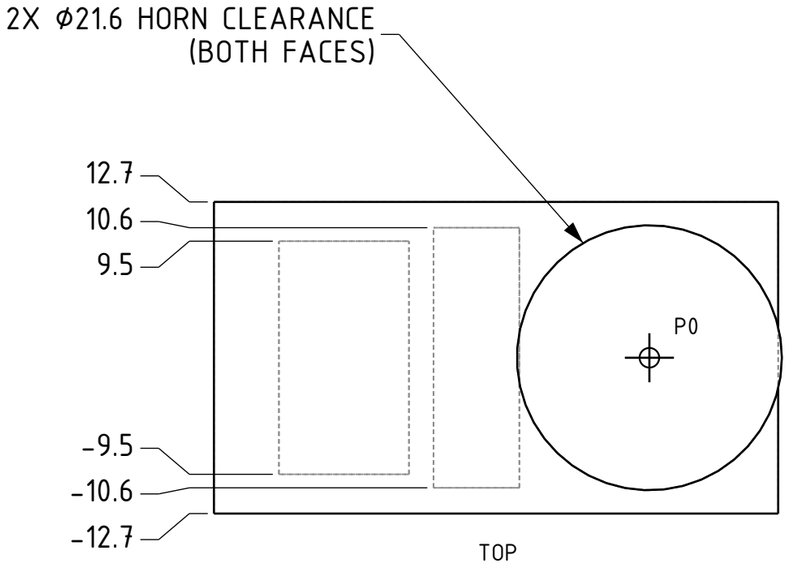

TOP

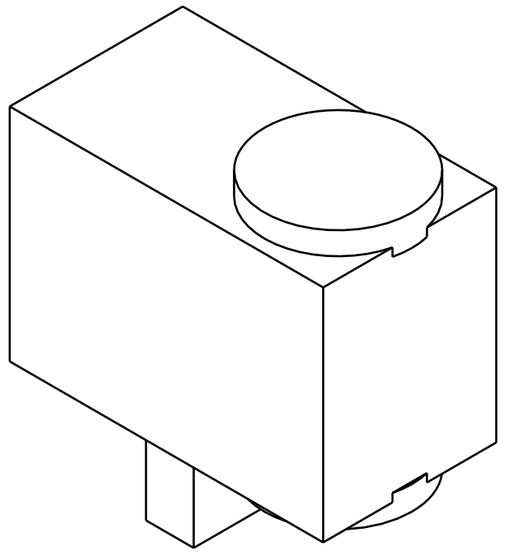

ISOMETRIC (NOT TO SCALE)

POCKET P (servo frame; 0.3 clearance included)

1. Main box x −35.5 to 10.5, y ±12.7, z ±16.2.
2. Back pad box x −30.2 to −19.6, y ±9.5, z −18.0 to −15.5.
3. Plug bay box x −17.6 to −10.6, y ±10.6, z −28.5 to −15.5 (mated plugs + cable bend).
4. Idler clearance cylinder ⌀21.6 on the shaft axis, z −18.5 to −15.0.
5. Horn clearance cylinder ⌀21.6 on the shaft axis, z 15.0 to 19.5.

NOTES

- Each part sheet locates P0 and gives the servo axes in the part frame; cut the union of the five bodies.
- All dimensions mm. Third-angle projection. Do not scale the drawing.

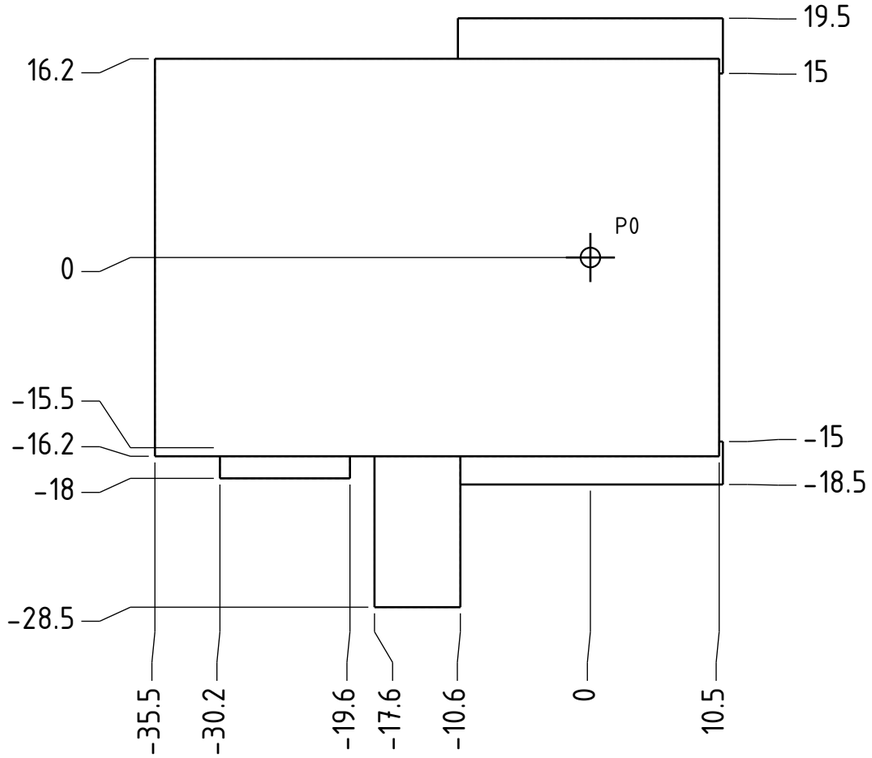

FRONT

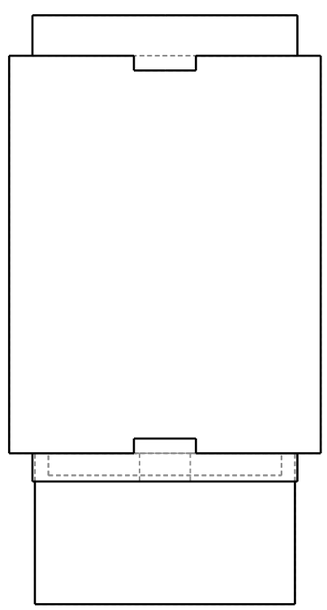

RIGHT

THIRD ANGLE PROJECTION

REFERENCE SHEET: in work sets A and B	
PROJECT TALOS 5-axis arm	EST. MASS -
PART Servo pocket P (cut into parts) (part sheet 2 of 2)	SCALE 2:1
PART NO. TAL-001	UNITS / REV mm / A
QTY / ARM -	DATE 2026-11-06
MATERIAL -	SHEET 3 of 21