

ISOMETRIC (NOT TO SCALE)

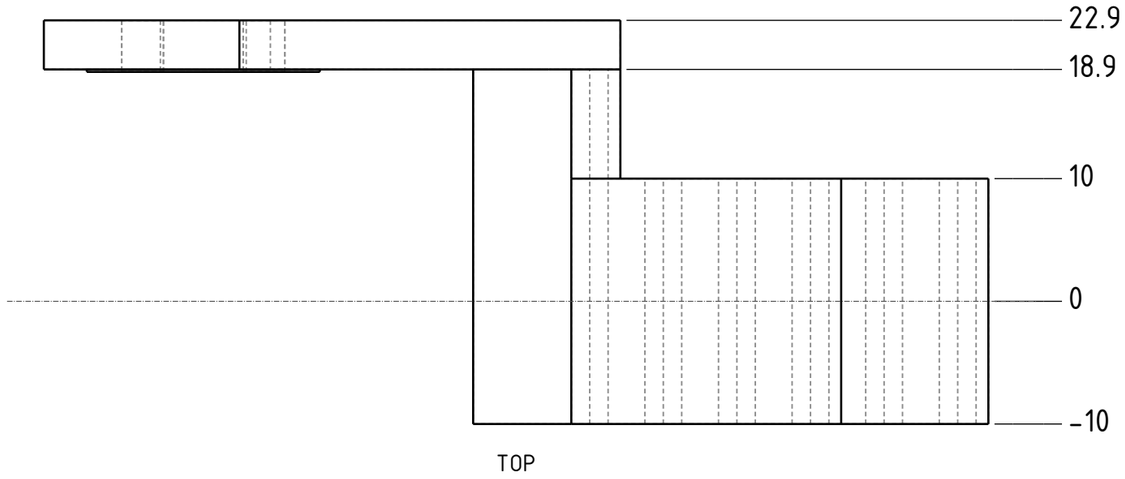

TOP

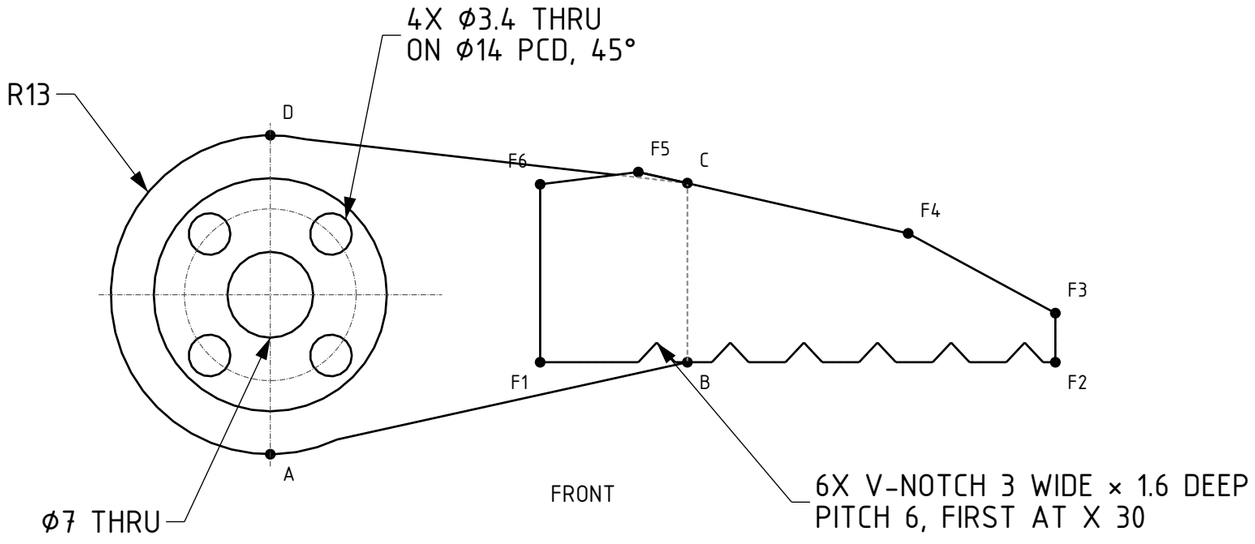

FRONT

PROFILE POINTS (X, Z)

PT	X	Z	PROFILE
A	0	-13	plate
B	34	-5.5	plate, knuckle
C	34	9.1	plate, knuckle
D	0	13	plate
F1	22	-5.5	finger, knuckle
F2	64	-5.5	finger
F3	64	-1.5	finger
F4	52	5	finger
F5	30	10	finger, knuckle
F6	22	9	finger, knuckle

FEATURES (in order)

1. Plate, y 18.9 to 22.9: circle R13 at the origin + polygon A B C D.
2. Finger, y -10 to 10: polygon F1 F2 F3 F4 F5 F6.
3. Knuckle, y 10 to 18.9: polygon F1 B C F5 F6.
4. Grip notches: 6X V-notch on the finger's lower edge, y -10 to 18.9 (finger and knuckle; the plate is not notched), 3 wide × 1.6 deep, pitch 6, first at x 30.
5. Pad ⌀19 on the plate's inner face, y 18.7 to 18.9: bears on the output horn face.
6. Horn holes through the plate: ⌀7 centre + 4X ⌀3.4 on ⌀14 PCD at 45°.

NOTES

- All dimensions mm. Third-angle projection. Do not scale the drawing.
- Part frame = the frame the part is built in, in talos_arm.py (given on each sheet).
- Printed tolerance +/-0.2 unless noted; servo pocket clearances are already included.
- Bolts to the jaw servo's output horn with 4x M3 x 6; closed position is jaw X along the gripper X.
- Print: horn plate down; support under the finger.

THIRD ANGLE PROJECTION

WORK SET B: forearm, wrist, gripper, moving jaw, idler plates

PROJECT	EST. MASS
TALOS 5-axis arm	11 g
PART	SCALE
Moving jaw	2:1
PART NO.	UNITS / REV
TAL-107	mm / A
QTY / ARM	DATE
1	2026-11-09
MATERIAL	SHEET
PLA, 20 % infill, 3 perimeters	18 of 21