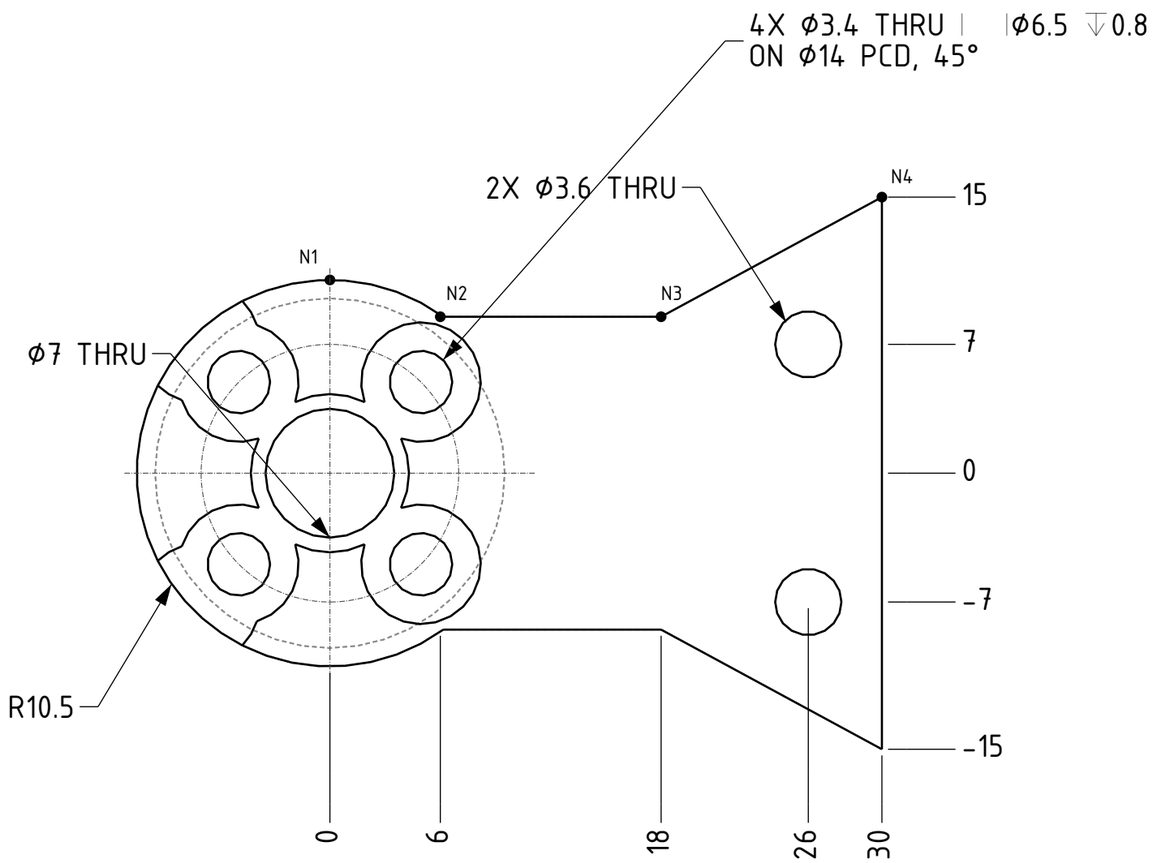

FRONT (OUTER FACE, -Y)

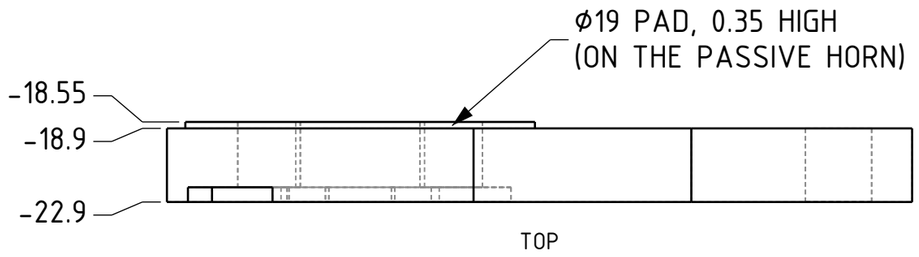

TOP

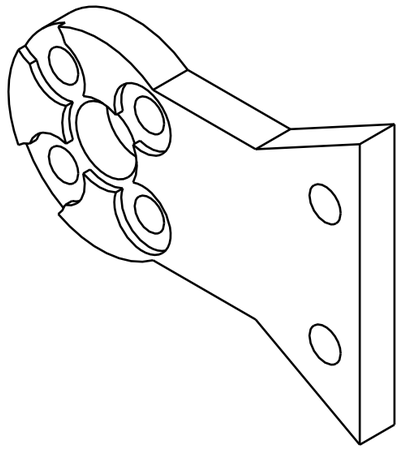

ISOMETRIC (NOT TO SCALE)

NECK POINTS (X, Z), MIRRORED IN Z

PT	X	Z
N1	0	±10.5
N2	6	±8.5
N3	18	±8.5
N4	30	±15

FEATURES (in order)

1. Plate, y -22.9 to -18.9: circle R10.5 at the origin + neck polygon N1 to N4 (mirrored in Z). Same outline as the idler plate on TAL-002.
2. Pad ⌀19 on the inner face, y -18.9 to -18.55: it bears on the servo's passive horn.
3. Centre hole ⌀7 through: clears the servo's idler boss (nothing screws into the boss).
4. Horn holes: 4X ⌀3.4 through on ⌀14 PCD at 45°, counterbore ⌀6.5 0.8 deep from the outer face (4X M3 × 5 into the passive horn).
5. Counterbore clean-up, 0.8 deep from the outer face: ⌀8.6 on the centre (no thin web between the counterbores and the centre hole); the two counterbores at x < 0 run out through the hub rim (second ⌀6.5 3 further out along each one's radius), so no sliver is left on the first layer.
6. Tab holes: 2X ⌀3.6 through at x 26, z ±7 (M3 × 10 into the arm link).

NOTES

- All dimensions mm. Third-angle projection. Do not scale the drawing.
- Part frame = the frame the part is built in, in talos_arm.py (given on each sheet).
- Printed tolerance +/-0.2 unless noted; servo pocket clearances are already included.
- One on each arm link (TAL-103, TAL-104), in the pocket on the link's -Y side: 2X M3 × 10 into the link, 4X M3 × 5 into the servo's passive horn, which turns on the idler boss (an M3 × 6 would reach the servo case behind the 1.95 thick horn). No hub cap on this side: one wide enough for the screws would hit the parent servo's plugs.
- Print: outer face down; no support.

THIRD ANGLE PROJECTION

WORK SET B: forearm, wrist, gripper, moving jaw, idler plates	
PROJECT TALOS 5-axis arm	EST. MASS 3 g
PART Idler plate	SCALE 3:1
PART NO. TAL-110	UNITS / REV mm / A
QTY / ARM 2	DATE 2026-11-09
MATERIAL PLA, 20 % infill, 3 perimeters	SHEET 20 of 21