Unit 10. Pipeline Multiple Instructions

- Control Hazard
- Branch determines flow of control
  - Fetching next instruction depends on compare outcome
  - Pipeline can't always fetch correct instruction
- In MIPS pipeline
  - Need to compare registers and compute target early in the pipeline

k ← number of pipes
n ← stage

Final: 08/20 Thur 6-9PM
40 Multiple Choices
No cheat sheet
After midterm: 65%

Stall on Branch

- Wait until branch outcome determined before fetching next instruction

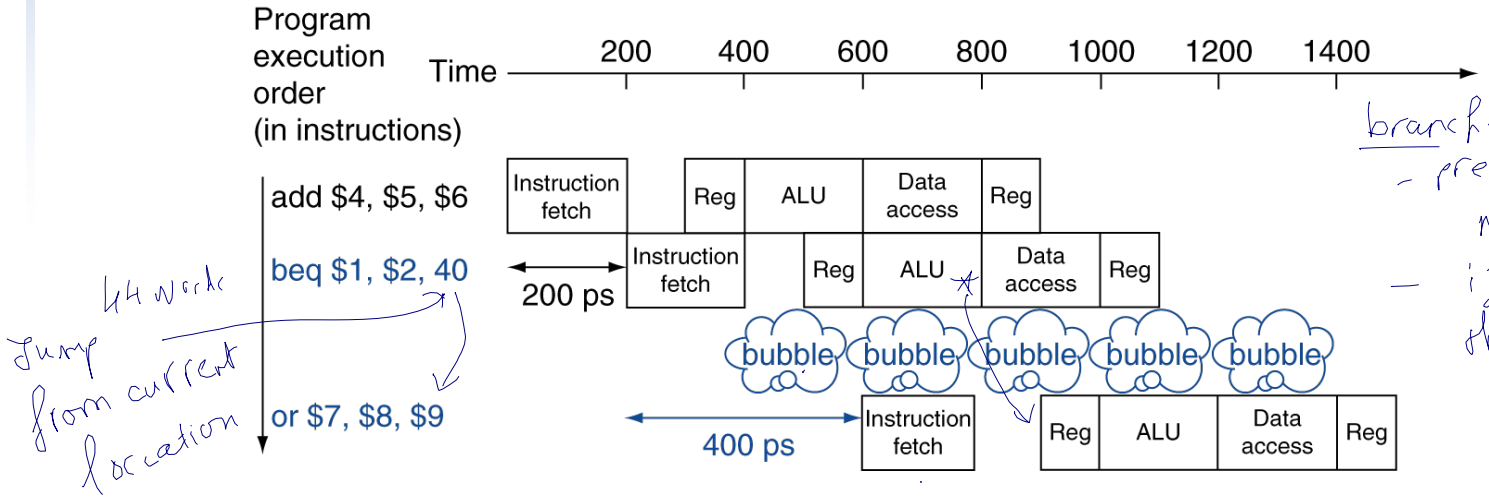

Branch Prediction

- Longer pipelines can't readily determine branch outcome early
  - Stall penalty becomes unacceptable
- Predict outcome of branch
  - Only invalid if prediction is wrong
- In MIPS pipeline
  - Can predict branches not taken
  - Fetch instruction following branch, with no delay

has to predict

MIPS with Predict Not Taken

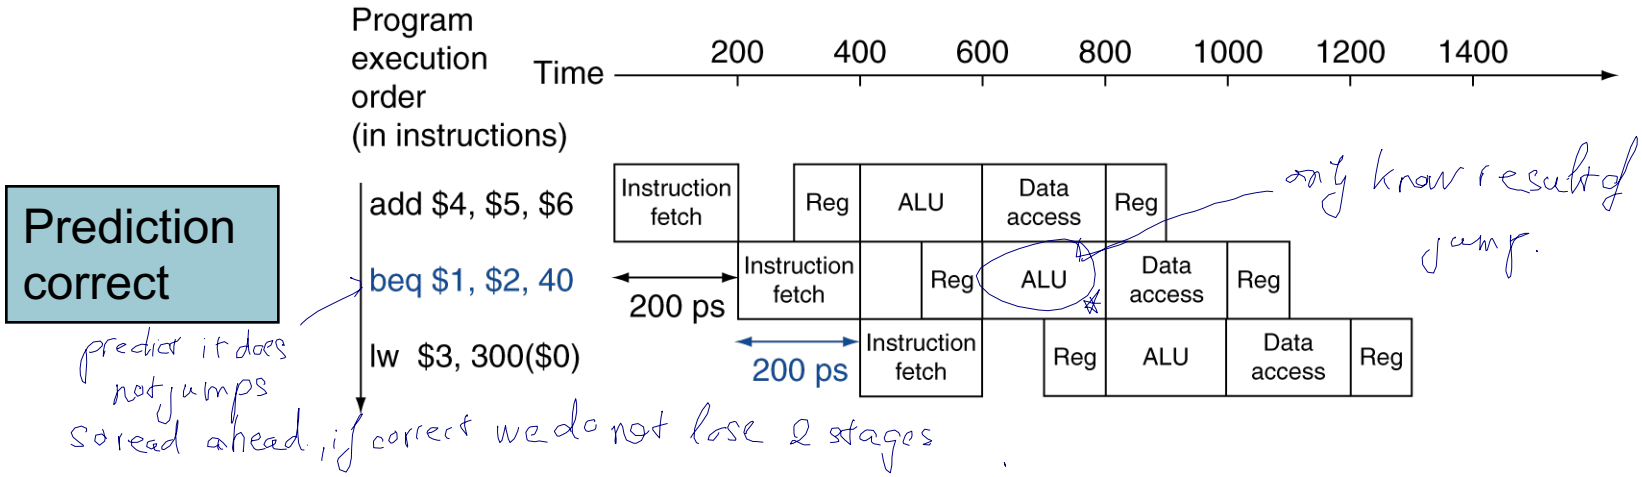

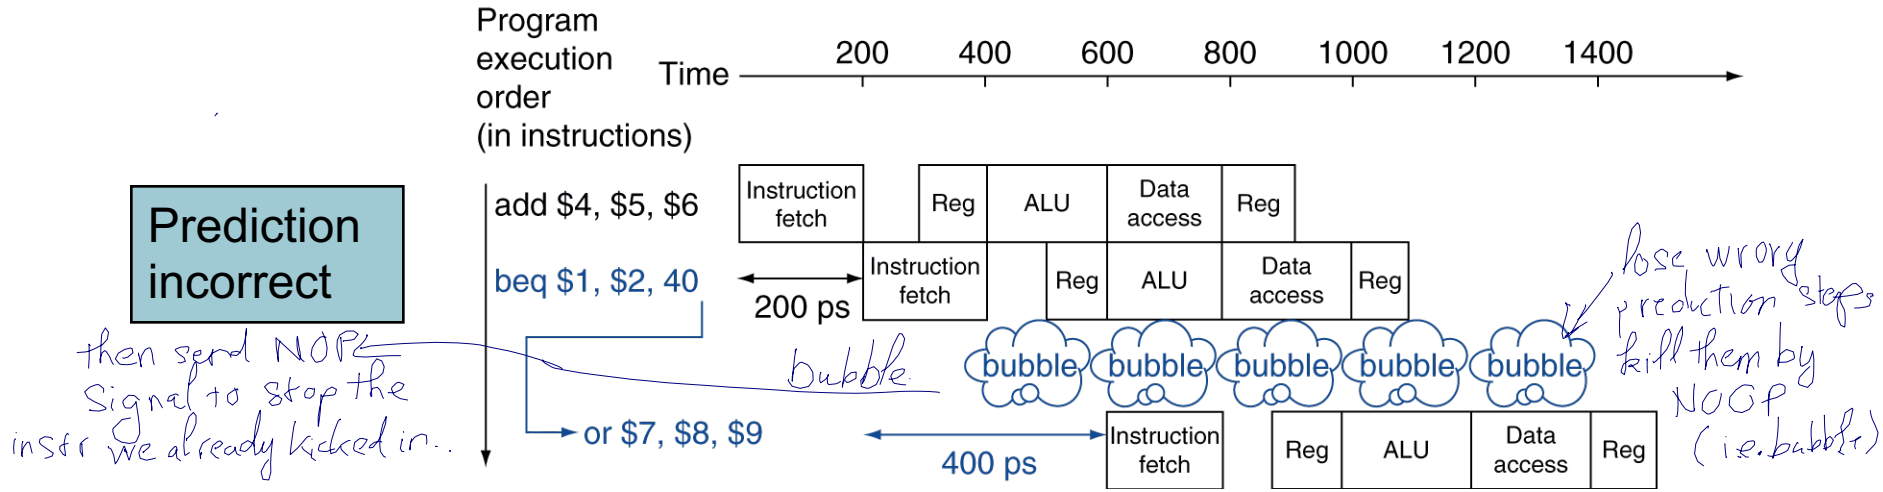

Pipeline Summary

The BIG Picture

reason we use pipeline : take advantage of multi CPU

- Pipelining improves performance by increasing instruction throughput
  - Executes multiple instructions in parallel
  - Each instruction has the same latency
- Subject to hazards
  - Structure, data, control
- Instruction set design affects complexity of pipeline implementation

MIPS Pipelined Datapath

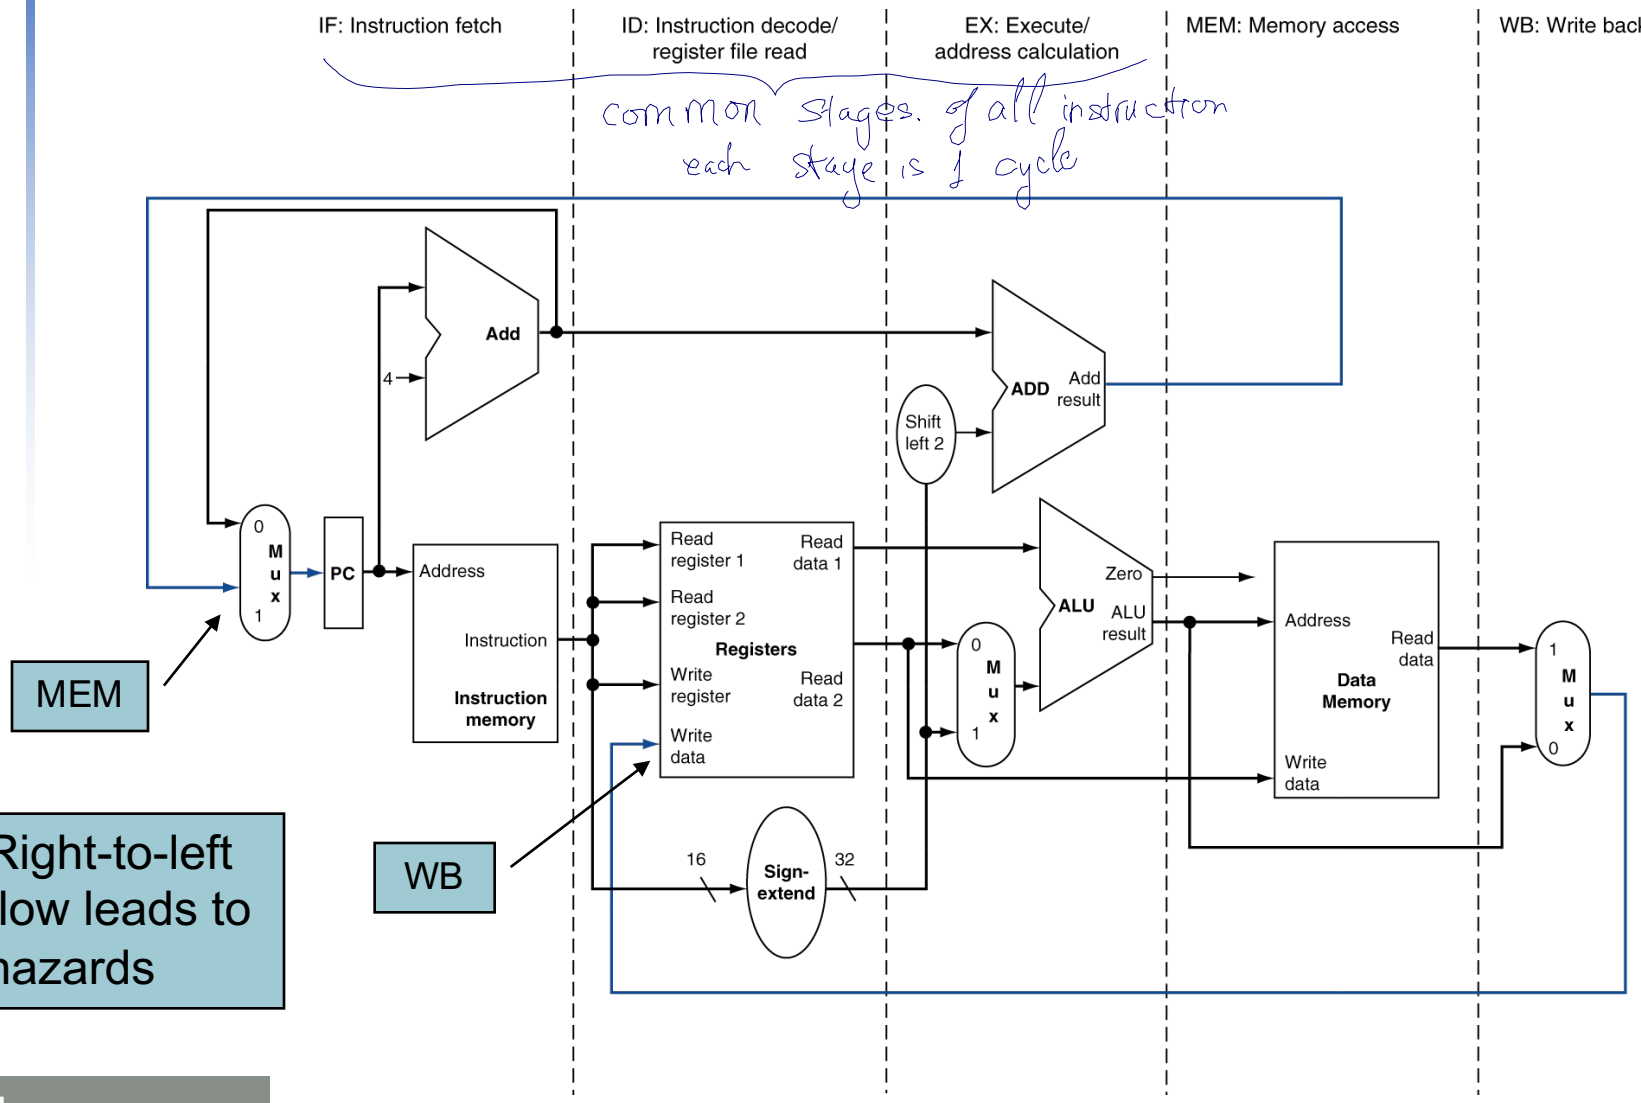

Pipeline registers

- Need registers between stages
  - To hold information produced in previous cycle

sing cycle data path.

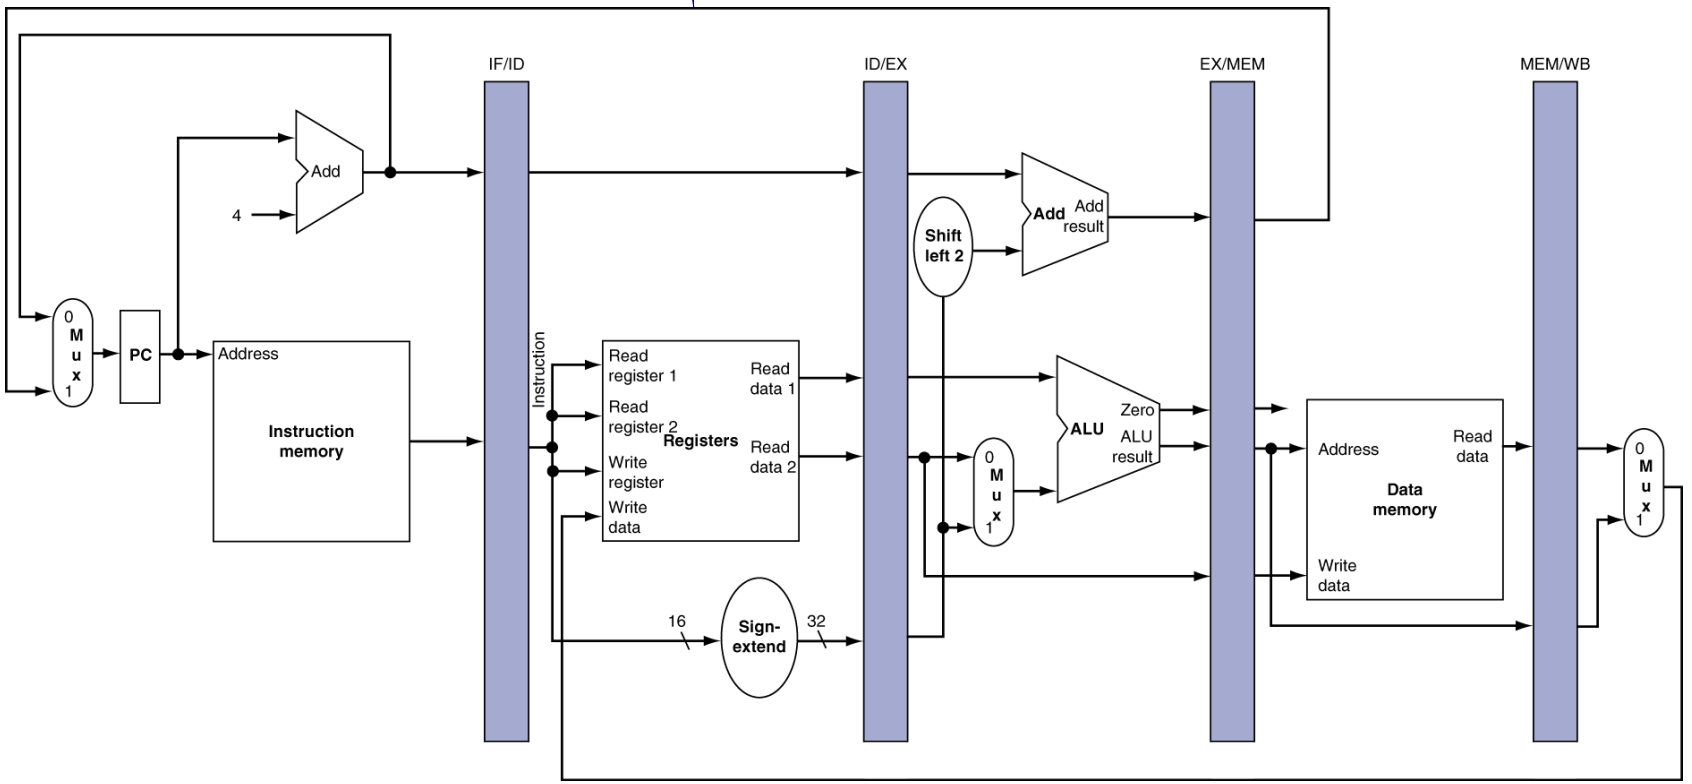

Pipeline Operation

- Cycle-by-cycle flow of instructions through the pipelined datapath
  - "Single-clock-cycle" pipeline diagram
    - Shows pipeline usage in a single cycle
    - Highlight resources used
  - c.f. "multi-clock-cycle" diagram
    - Graph of operation over time
- We'll look at "single-clock-cycle" diagrams for load & store

IF for Load, Store, …

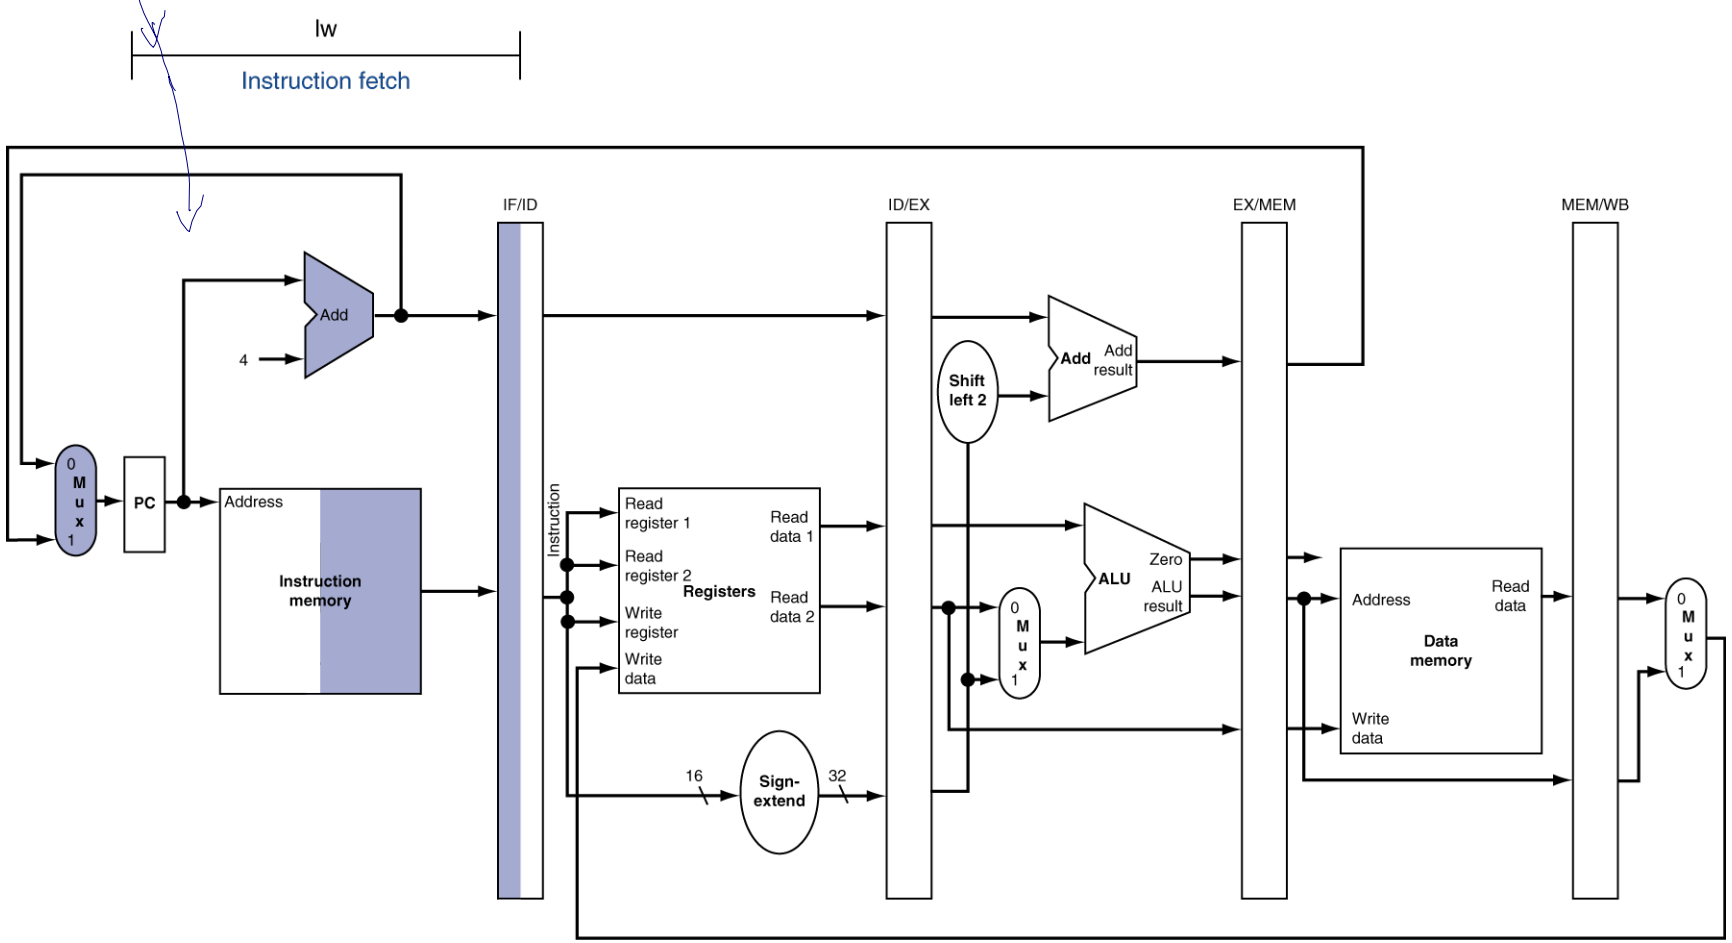

ID for Load, Store, …

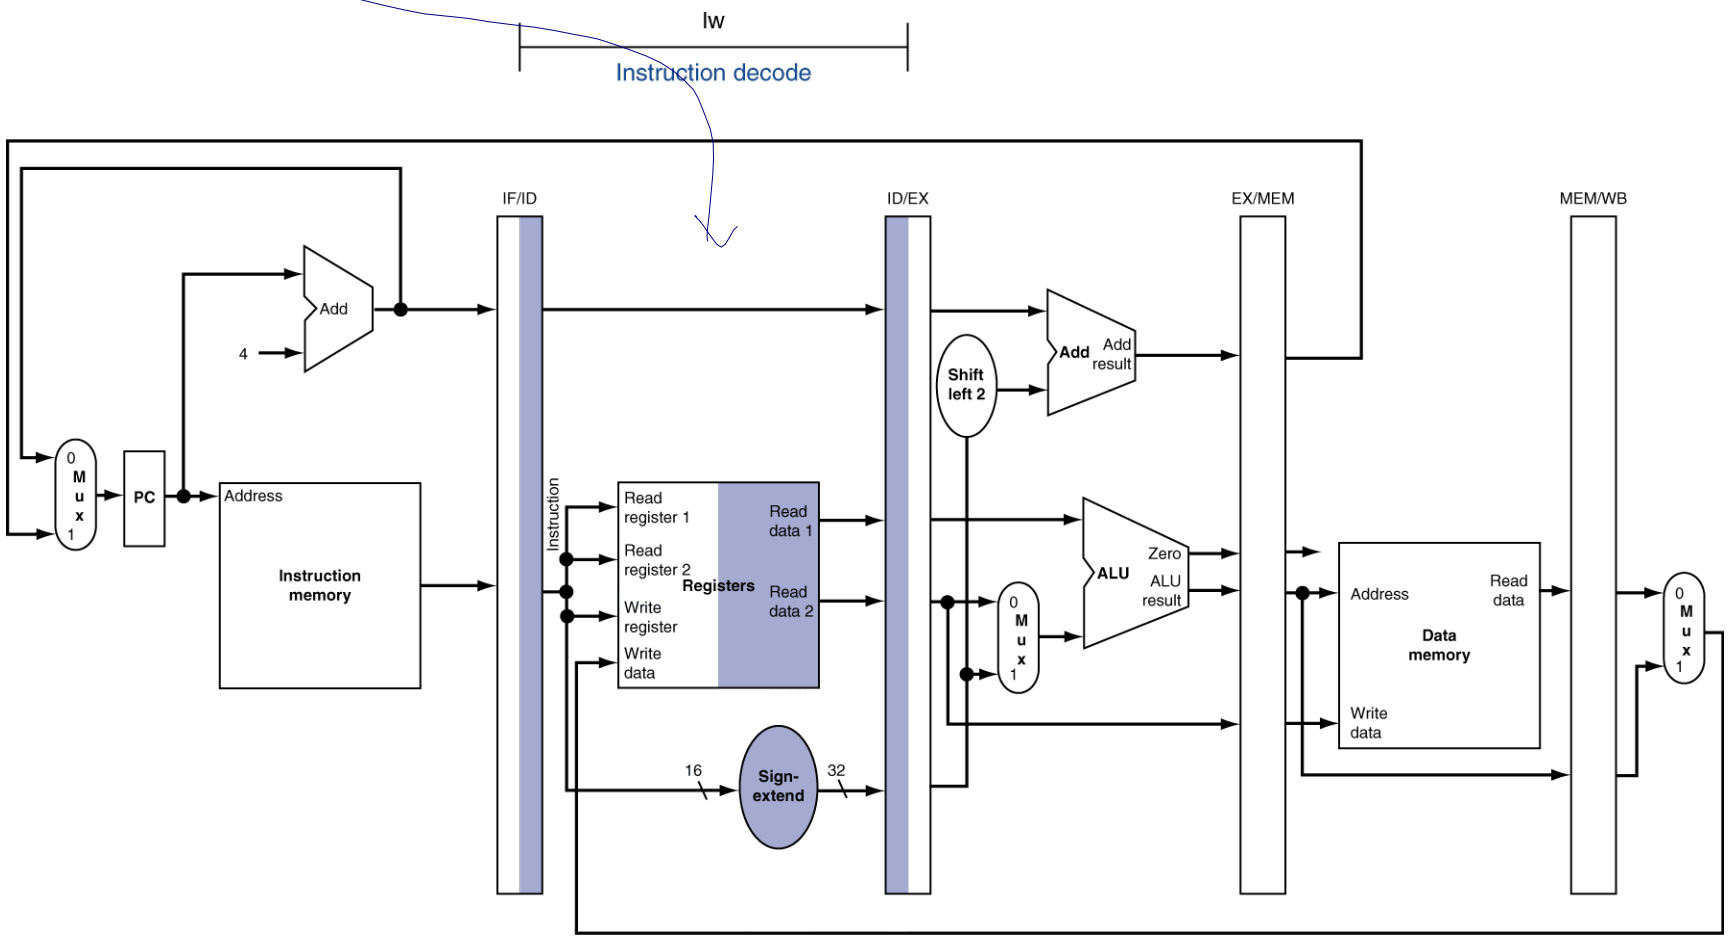

EX for Load

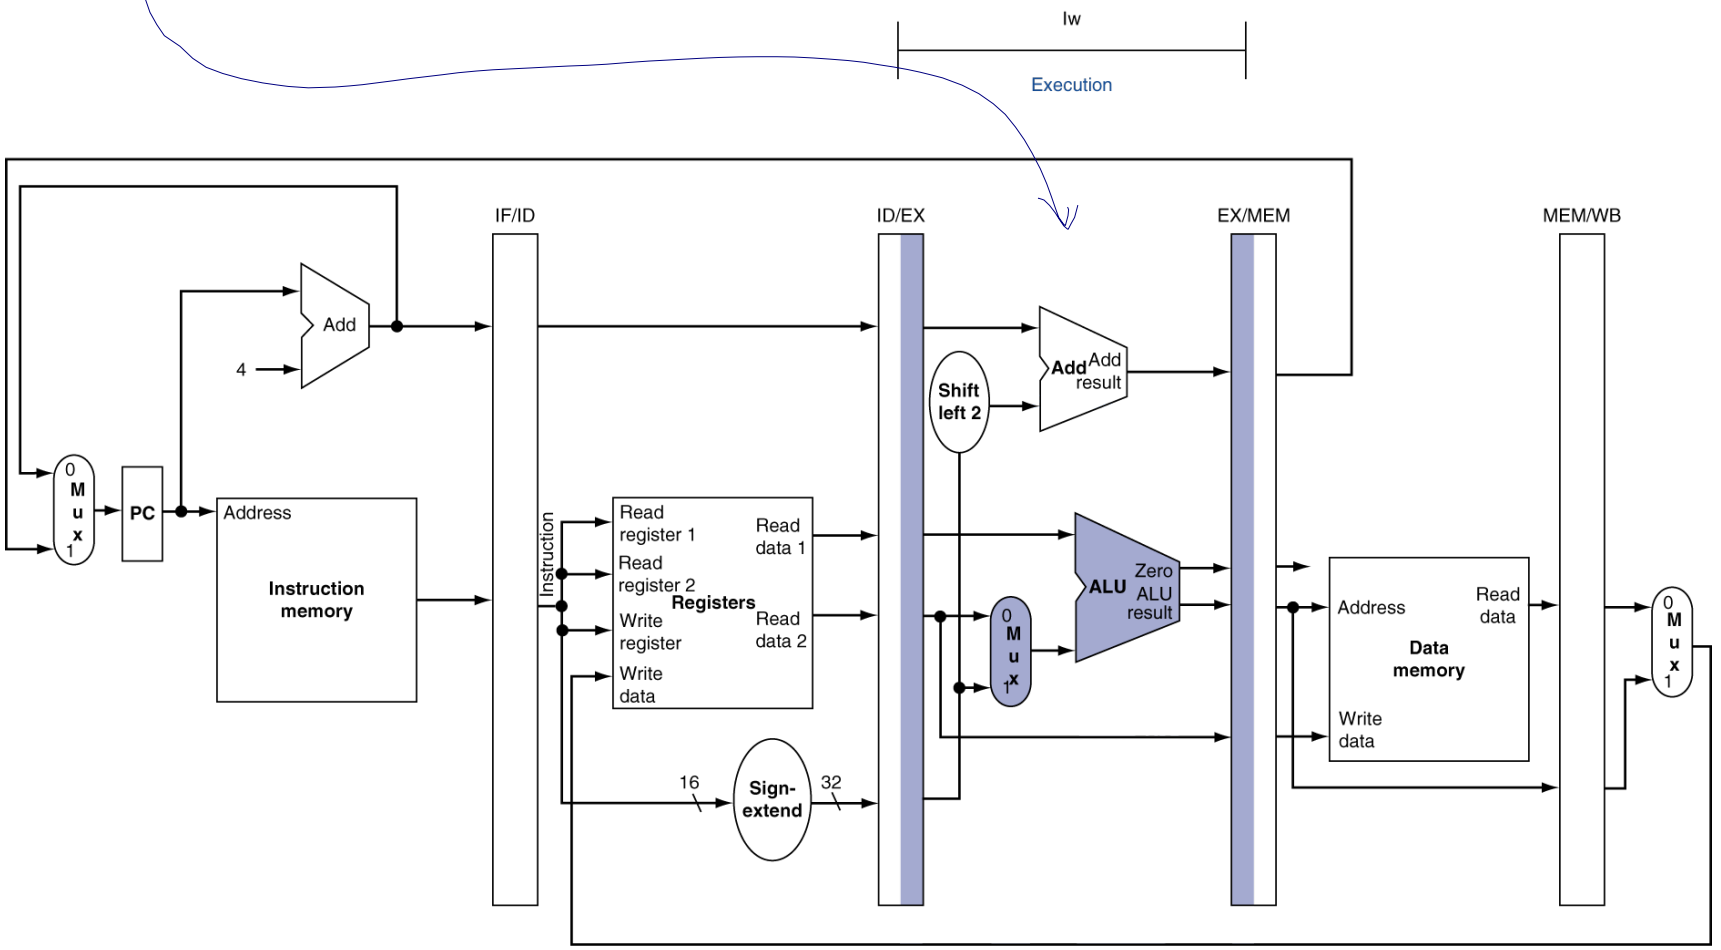
lw
Execution
IF/ID
ID/EX
EX/MEM
MEM/WB
Add
4
M
u
x
0
1
PC
Address
Instruction memory
Instruction
Read register 1
Read register 2
Registers
Write register
Write data
Read data 1
Read data 2
16
Sign-extend
32
Shift left 2
Add
Add result
ALU
Zero
ALU result
Address
Read data
Data memory
Write data

MEM for Load

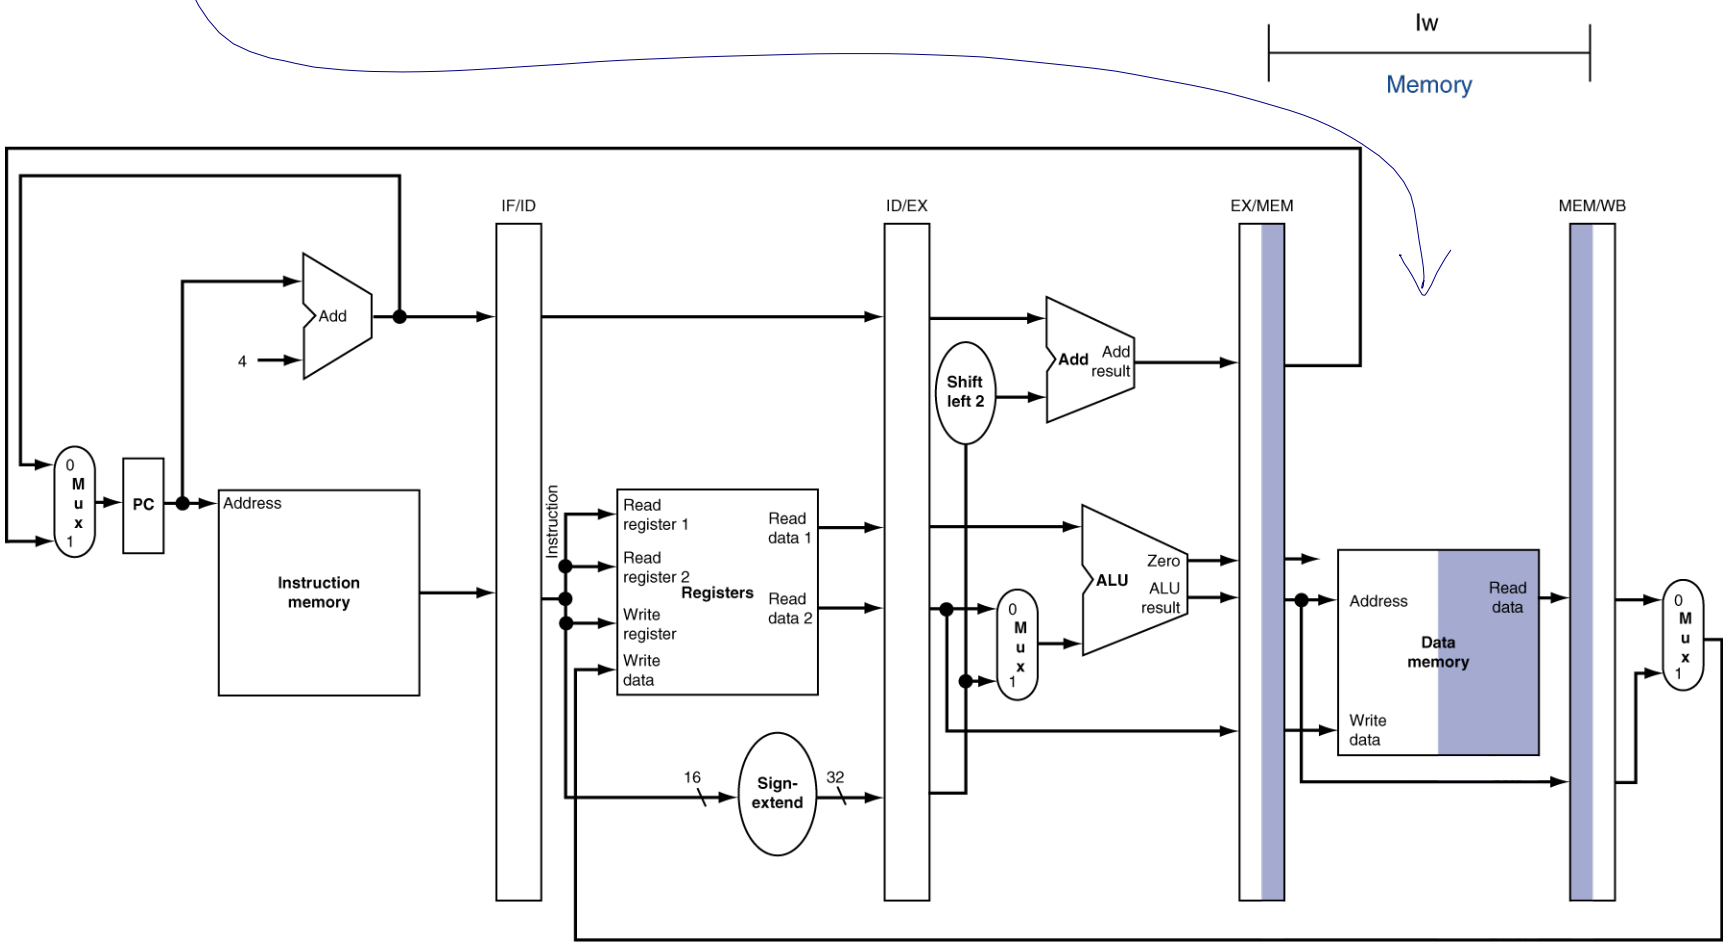
lw
Memory
IF/ID
ID/EX
EX/MEM
MEM/WB
Add
4
M u x
0
1
PC
Address
Instruction memory
Instruction
Read register 1
Read register 2
Registers
Write register
Write data
Read data 1
Read data 2
16
Sign-extend
32
Shift left 2
Add
Add result
ALU
Zero
ALU result
Address
Data memory
Read data
Write data

WB for Load

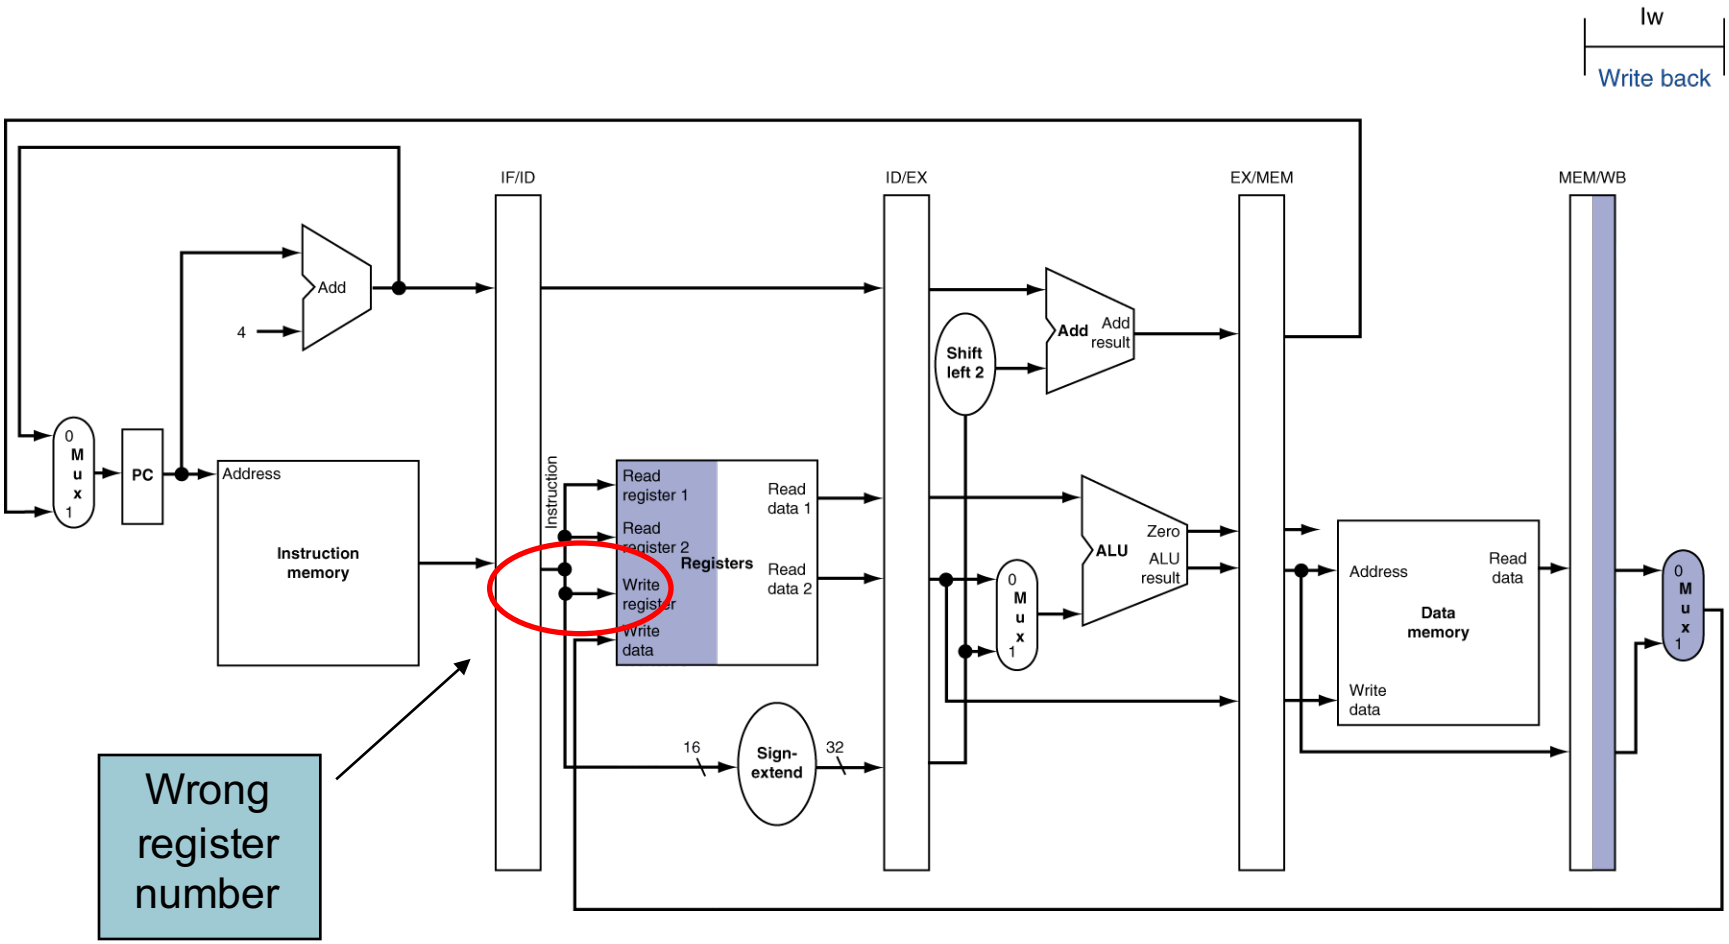
lw
Write back
IF/ID
ID/EX
EX/MEM
MEM/WB
Add
4
M
u
x
PC
Address
Instruction memory
Instruction
Read register 1
Read register 2
Registers
Write register
Write data
Read data 1
Read data 2
Shift left 2
Add
Add result
ALU
Zero
ALU result
Address
Read data
Data memory
Write data
16
Sign-extend
32
Wrong register number

Corrected Datapath for Load

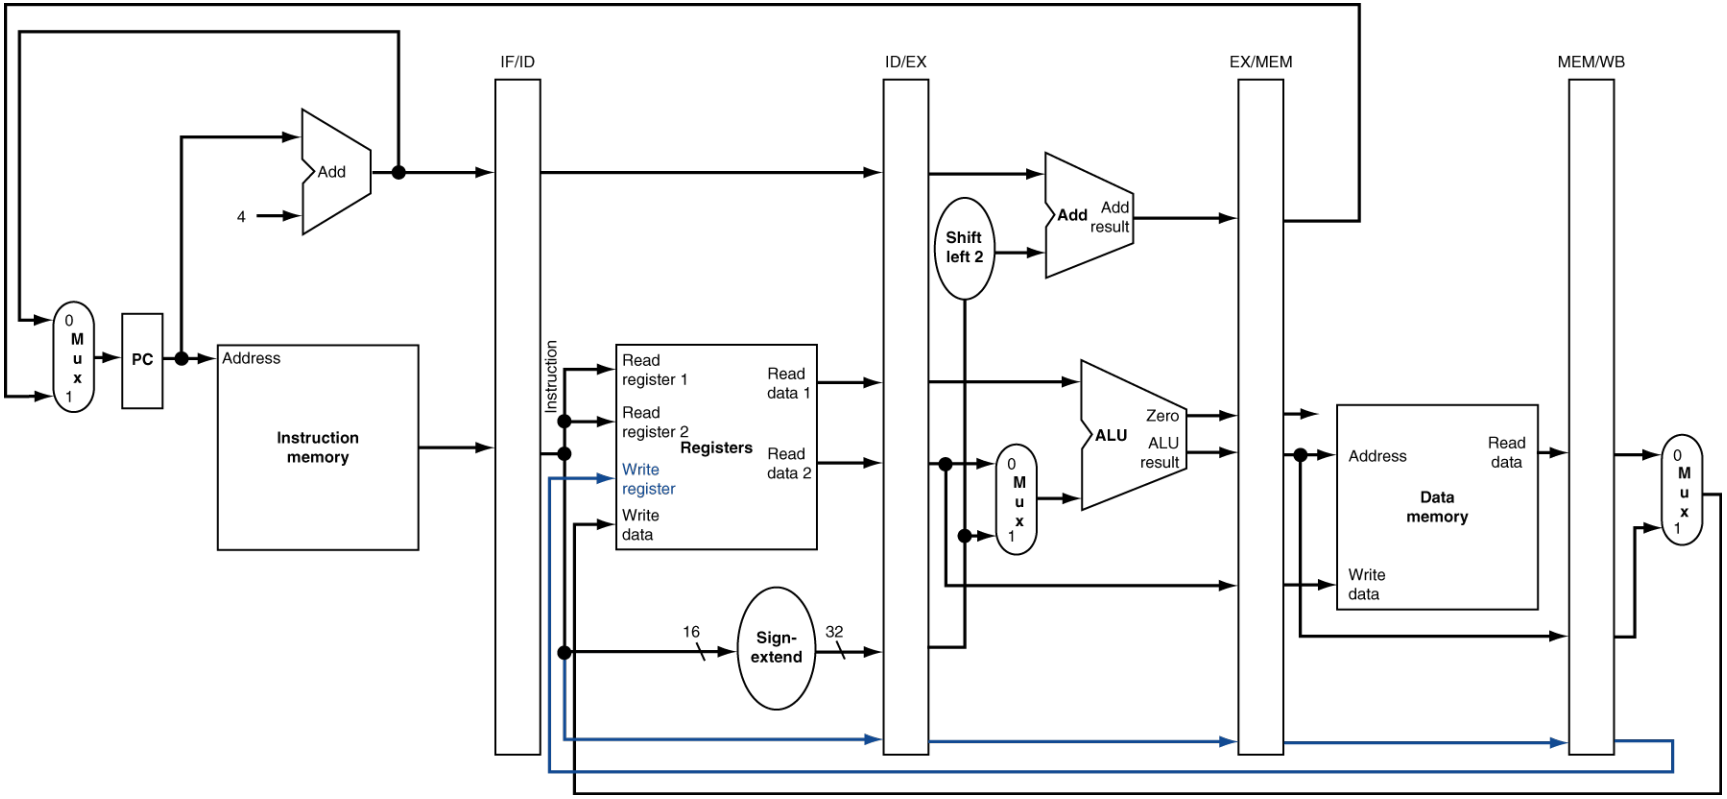

EX for Store

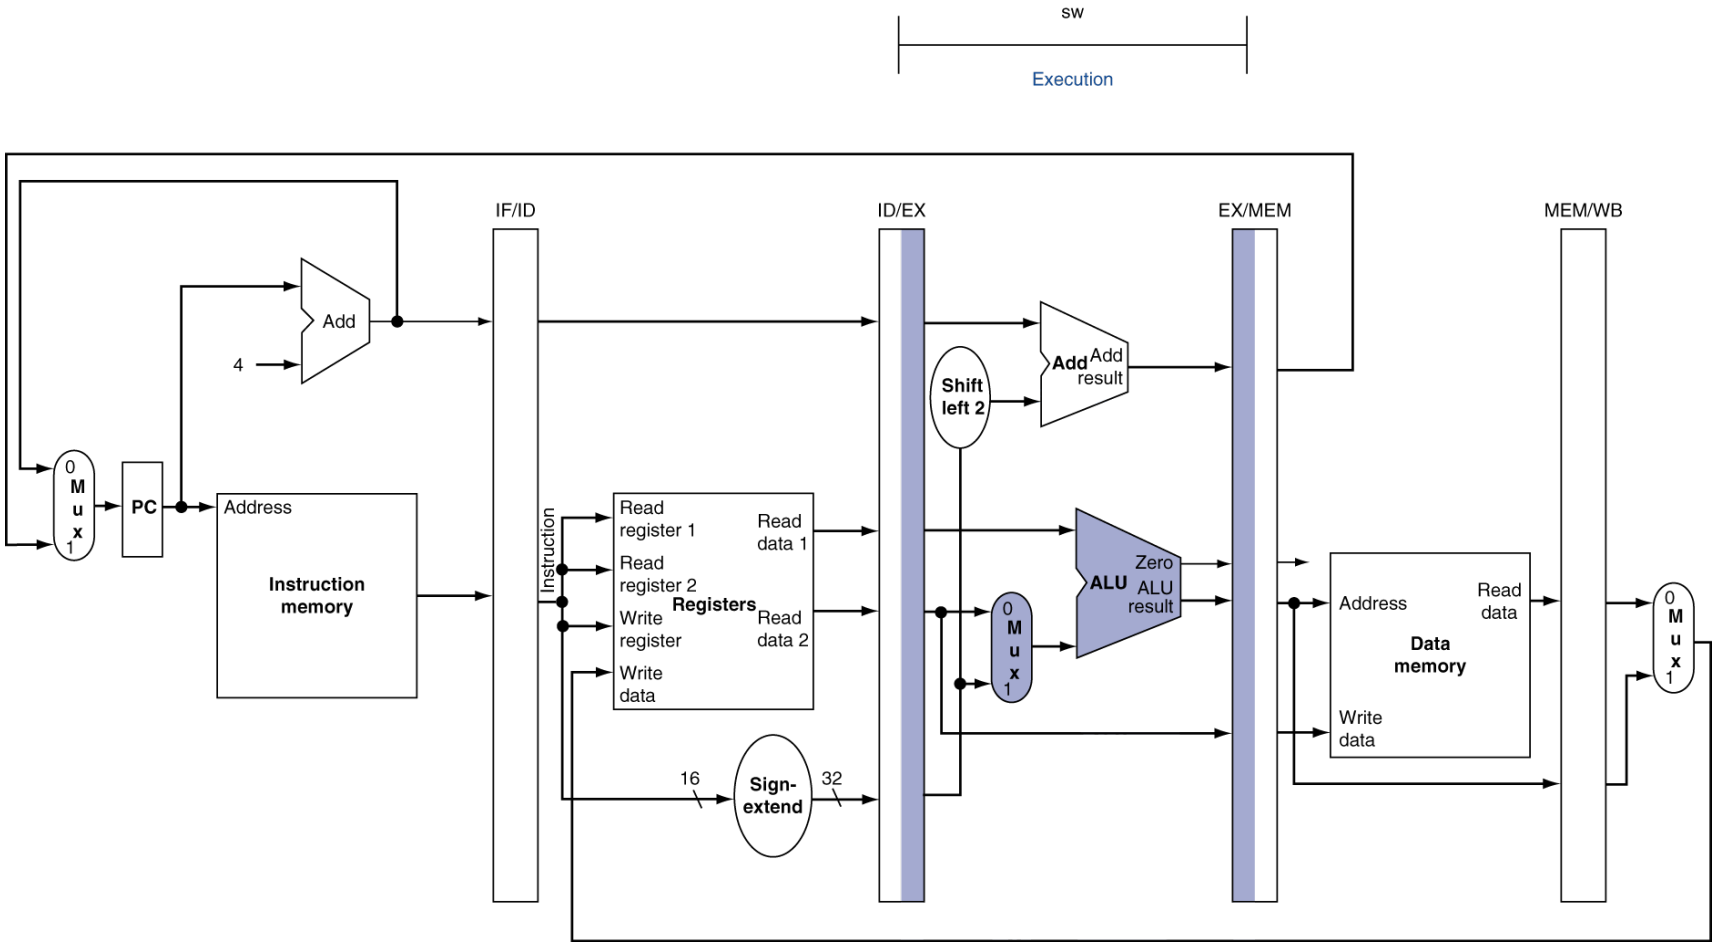
sw
Execution
IF/ID
ID/EX
EX/MEM
MEM/WB
Add
4
M u x
0
1
PC
Address
Instruction memory
Instruction
Read register 1
Read register 2
Registers
Write register
Write data
Read data 1
Read data 2
16
Sign-extend
32
Shift left 2
Add
Add result
ALU
Zero
ALU result
Address
Read data
Data memory
Write data

MEM for Store

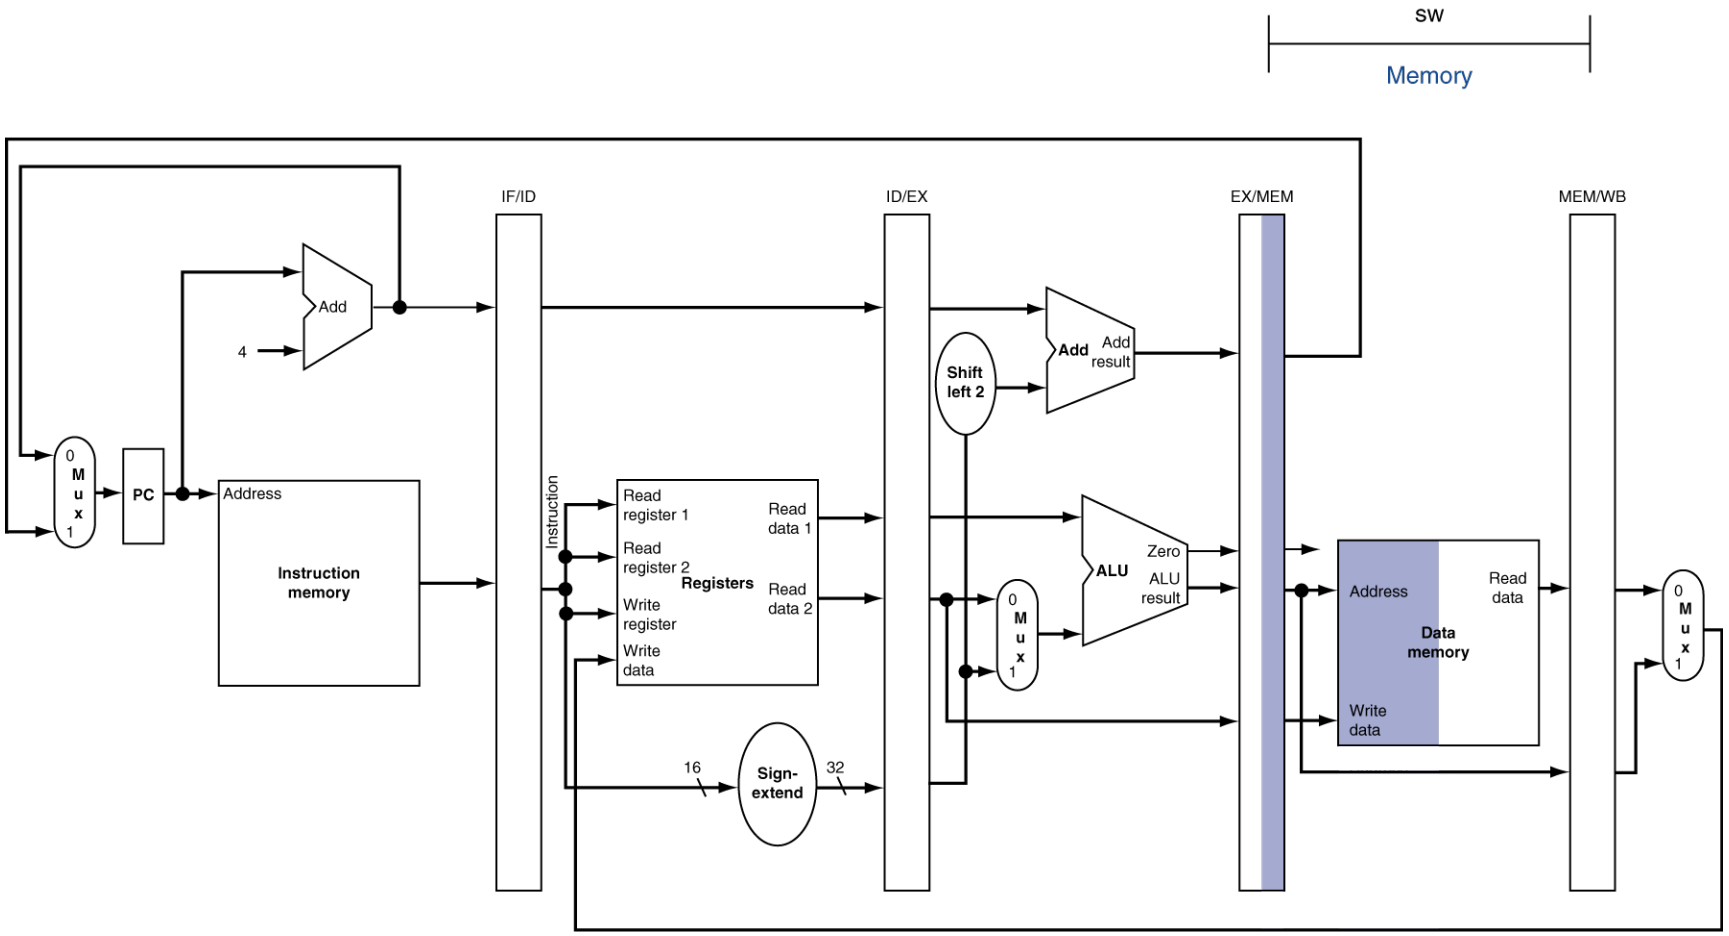

WB for Store

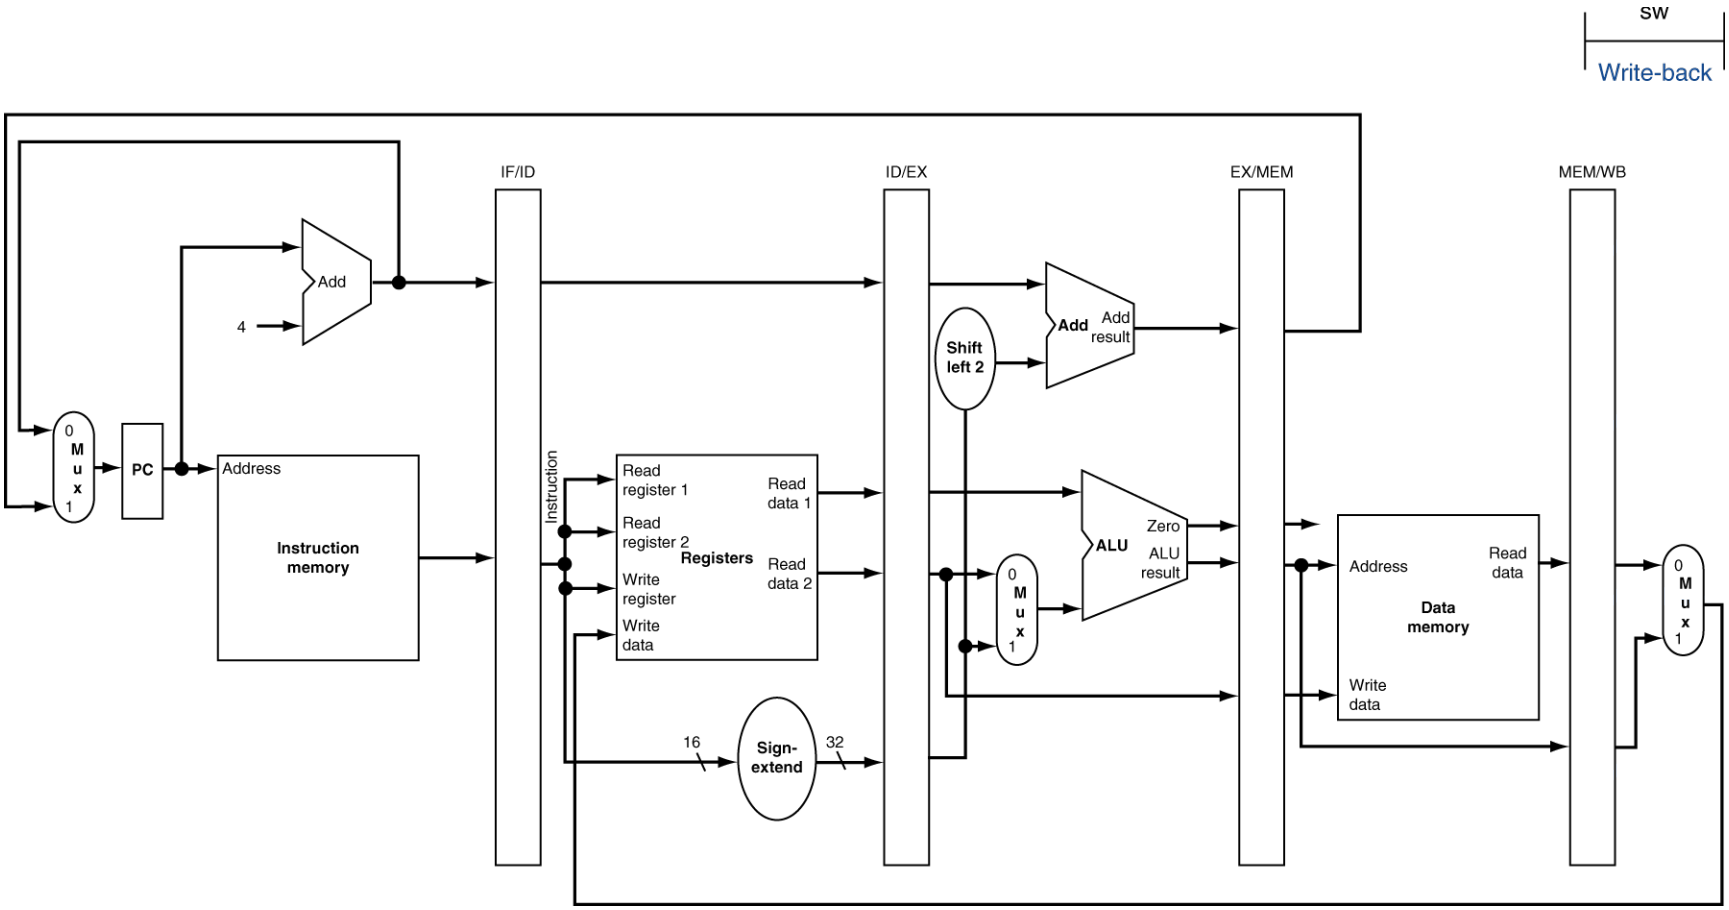
SW
Write-back
IF/ID
ID/EX
EX/MEM
MEM/WB
Add
4
M
u
x
0
1
PC
Address
Instruction memory
Instruction
Read register 1
Read register 2
Registers
Write register
Write data
Read data 1
Read data 2
16
Sign-extend
32
Shift left 2
Add
Add result
ALU
Zero
ALU result
Address
Read data
Data memory
Write data

Multi-Cycle Pipeline Diagram

- Form showing resource usage

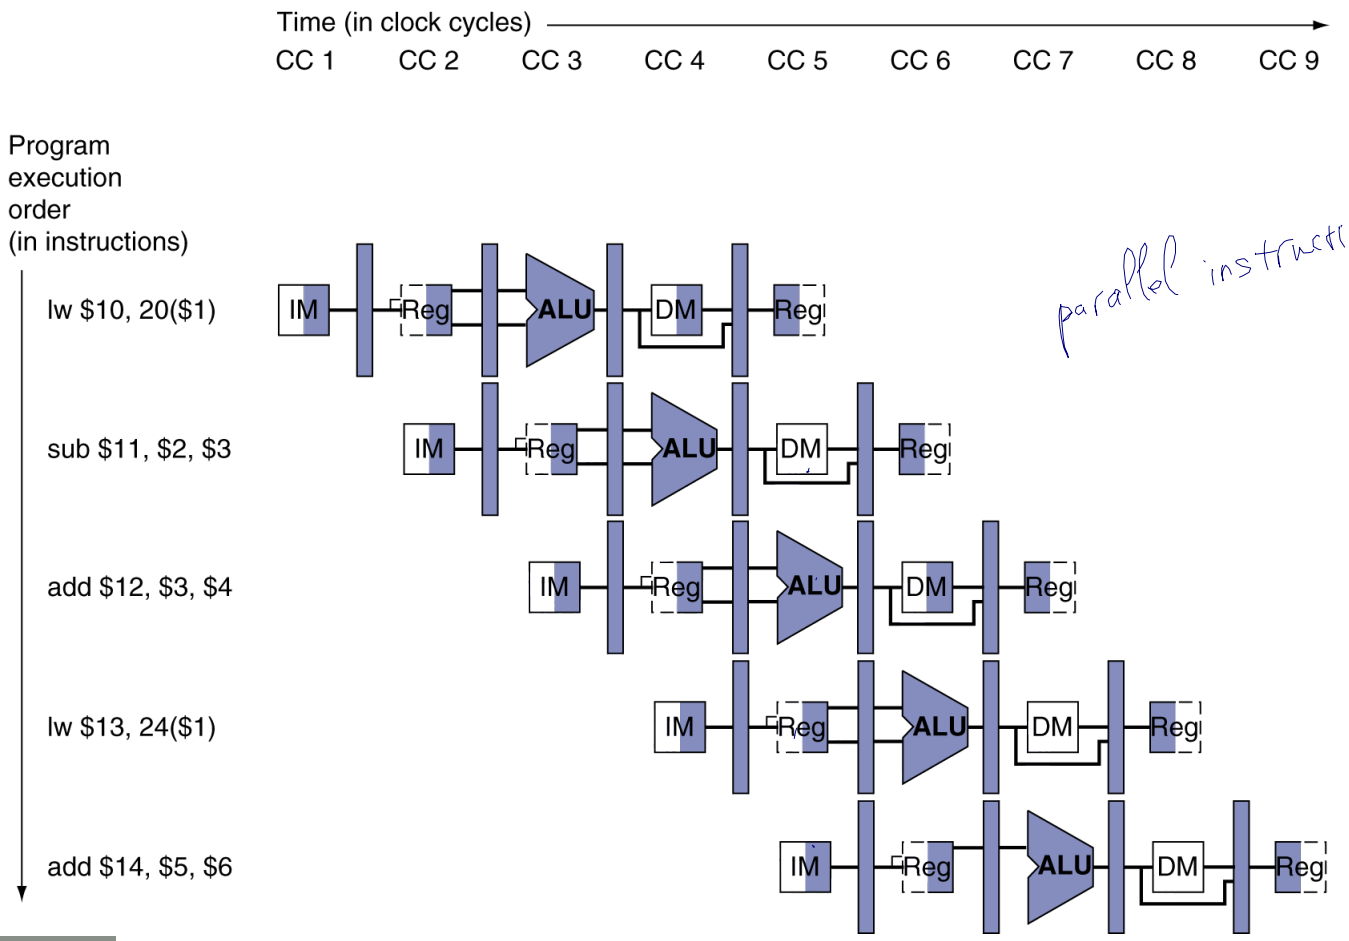

Multi-Cycle Pipeline Diagram

- Traditional form

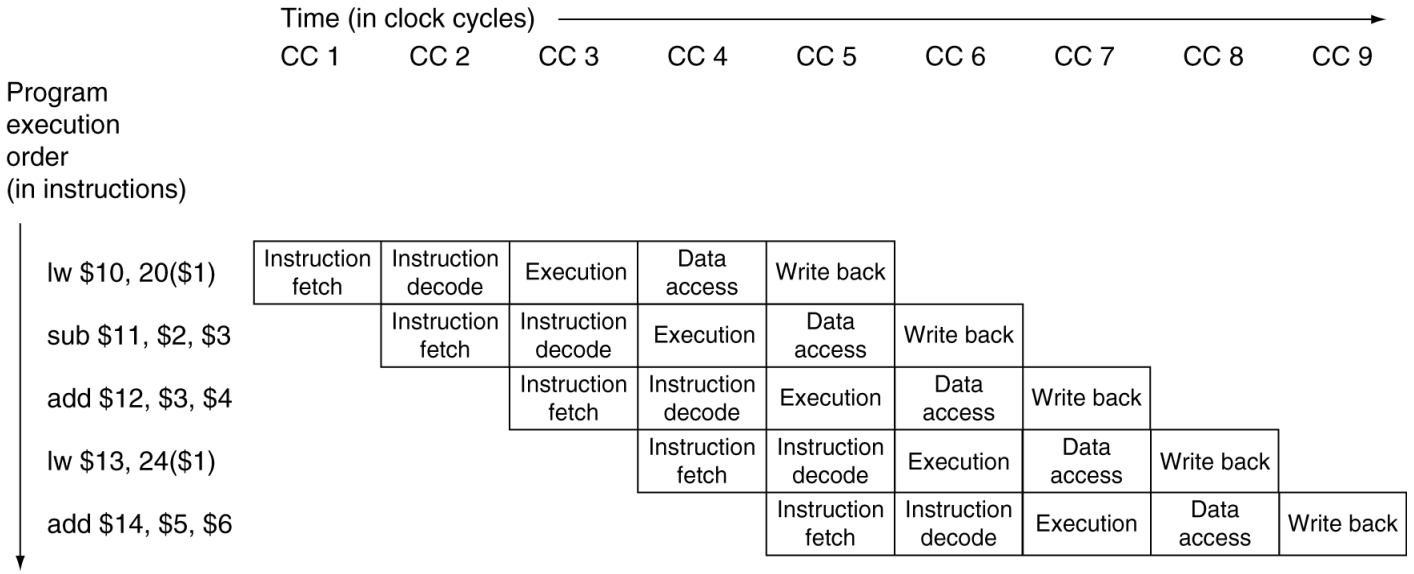

Single-Cycle Pipeline Diagram

- State of pipeline in a given cycle

add $14, $5, $6	lw $13, 24 ($1)	add $12, $3, $4	sub $11, $2, $3	lw $10, 20($1)
Instruction fetch	Instruction decode	Execution	Memory	Write-back

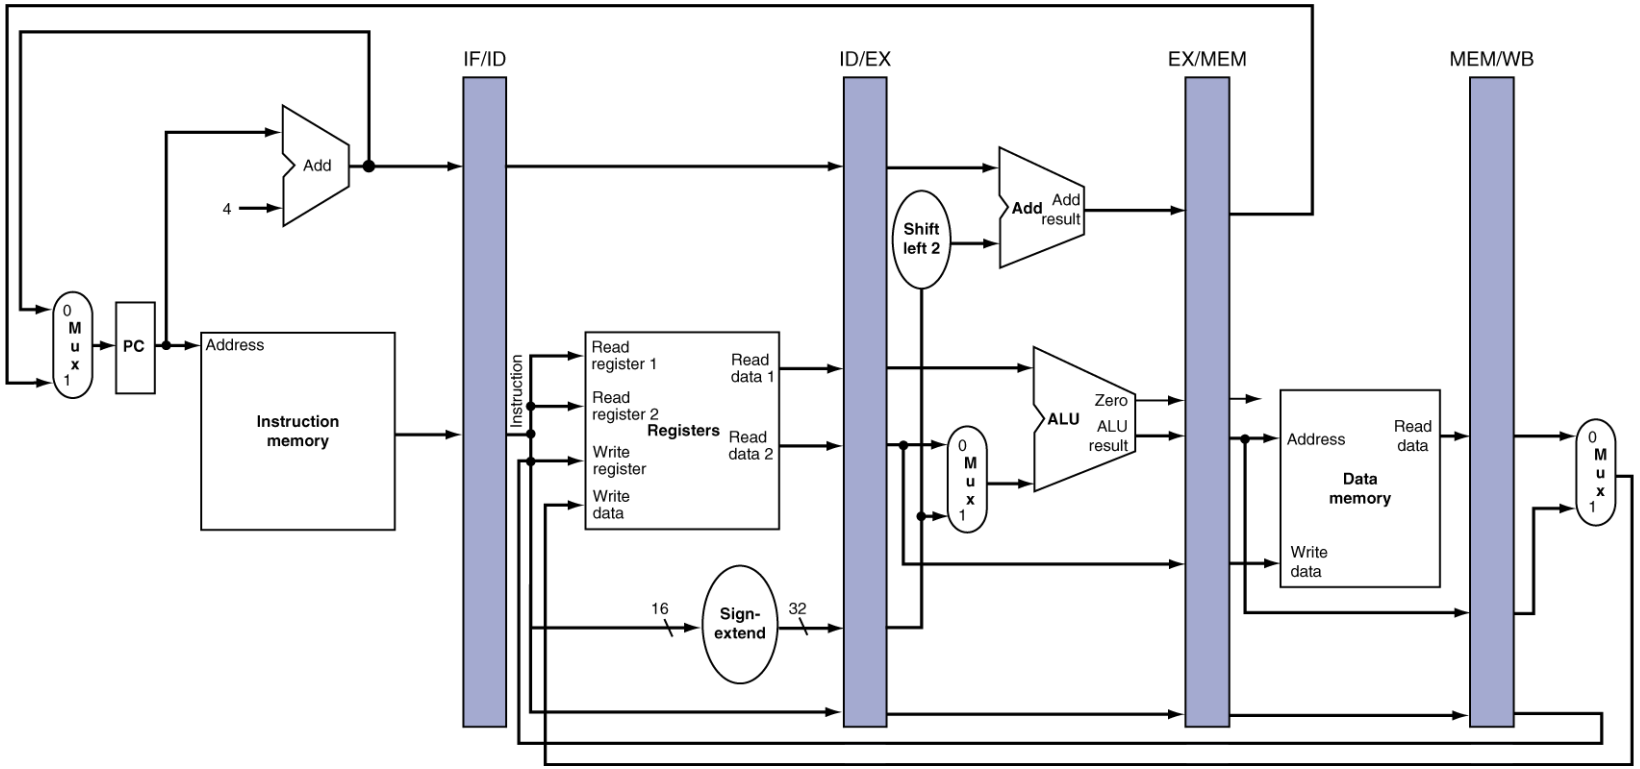

Pipelined Control (Simplified)

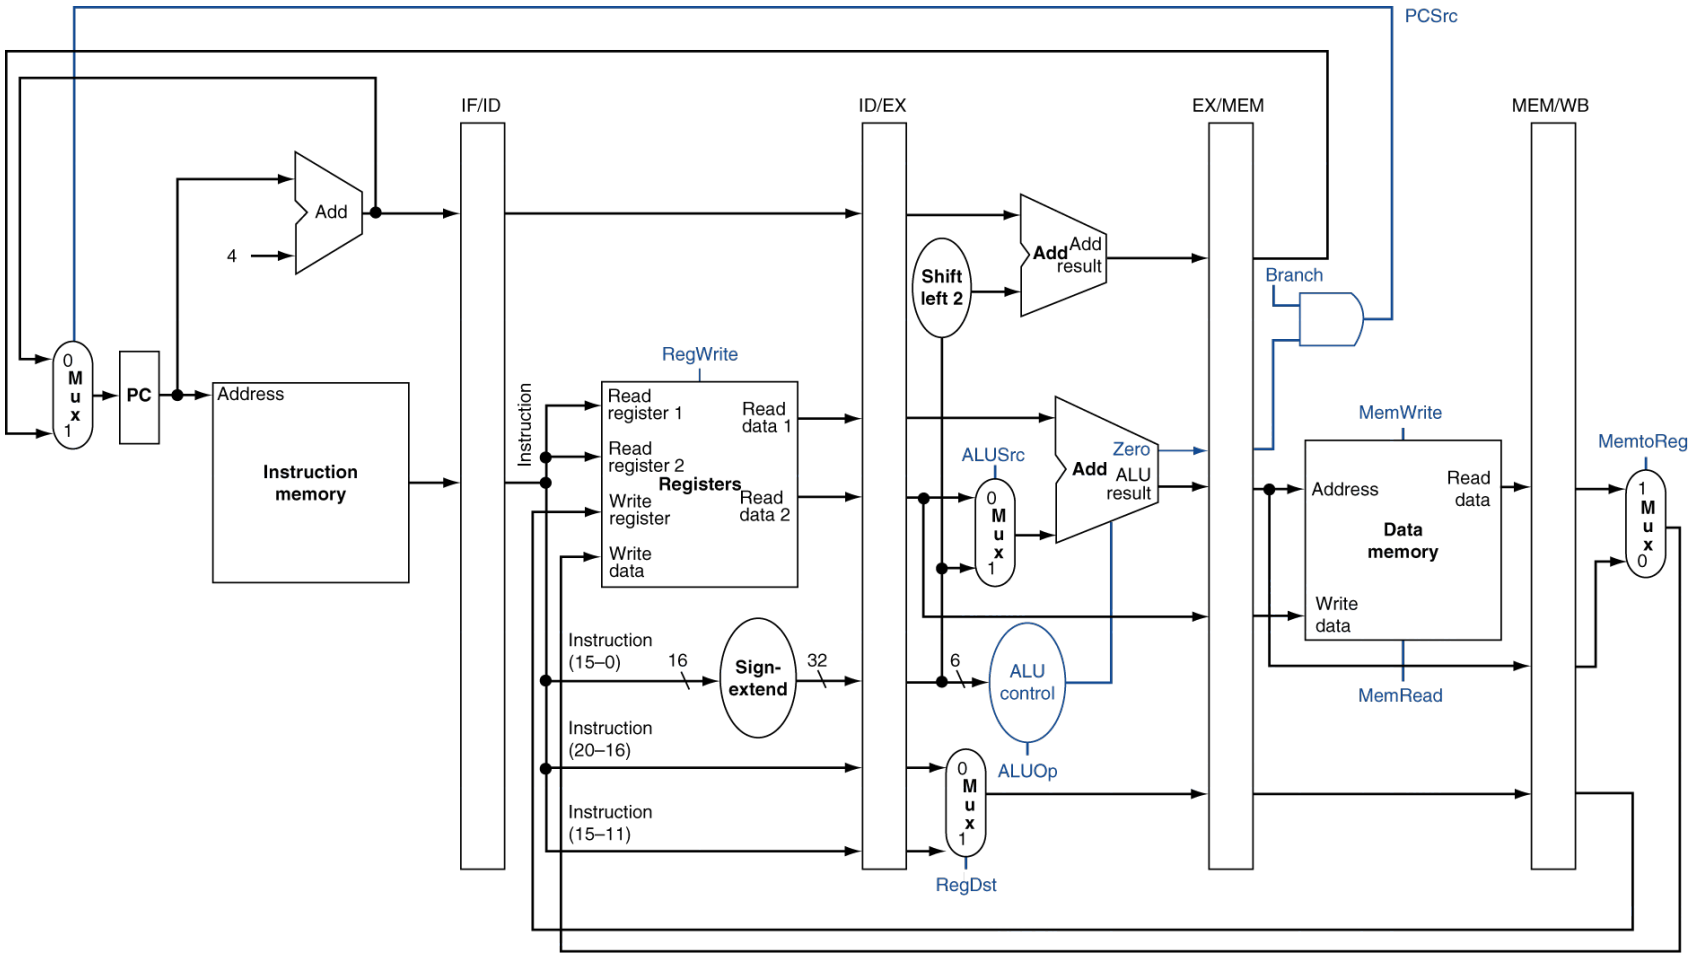

Pipelined Control

- Control signals derived from instruction
  - As in single-cycle implementation

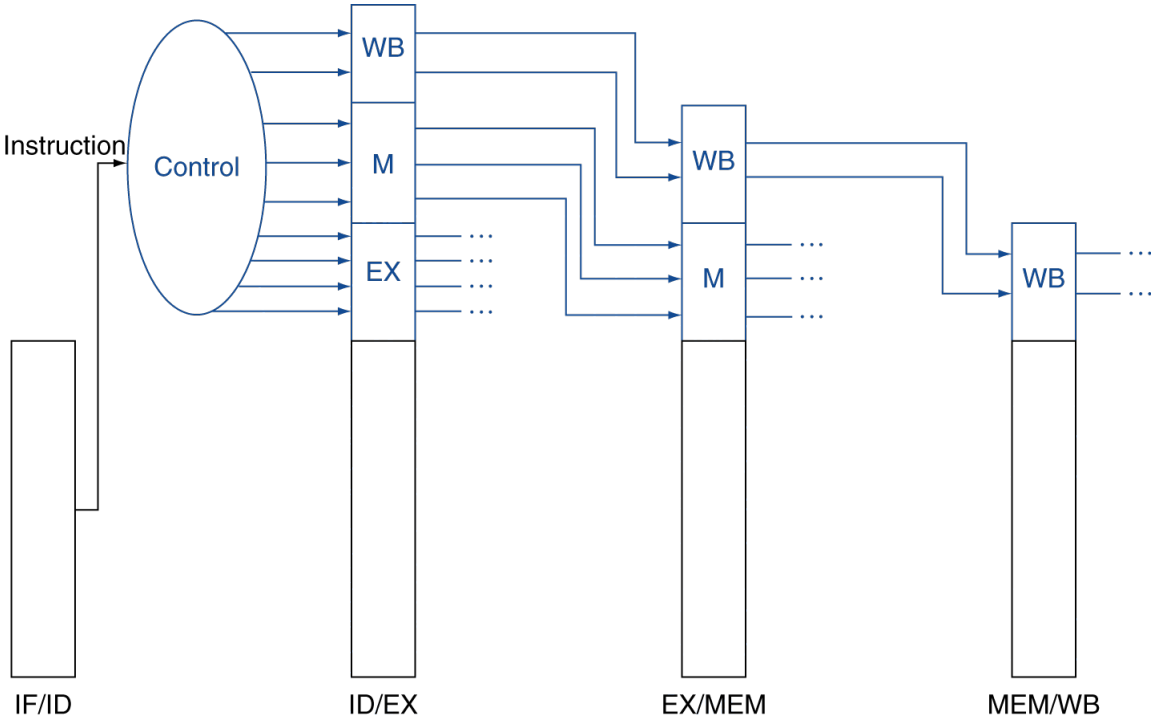

Pipelined Control

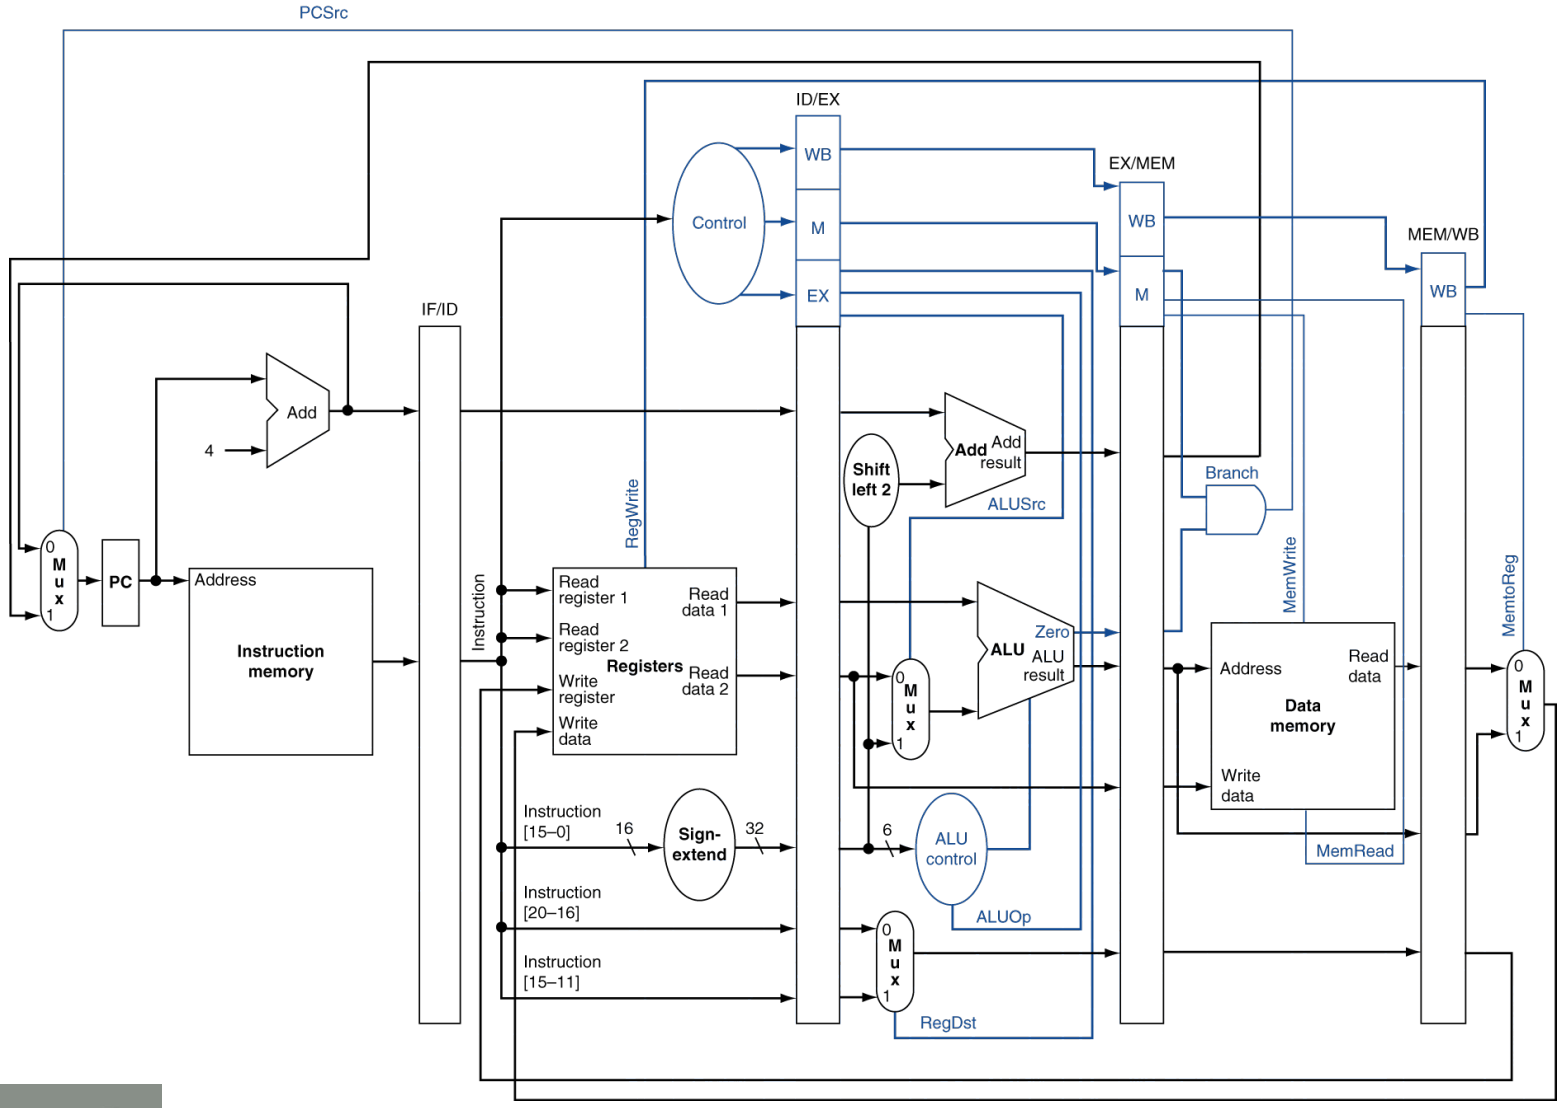

Data Hazards in ALU Instructions

- Consider this sequence:

```
sub $2, $1,$3
and $12,$2,$5
or  $13,$6,$2
add $14,$2,$2
sw  $15,100($2)
```

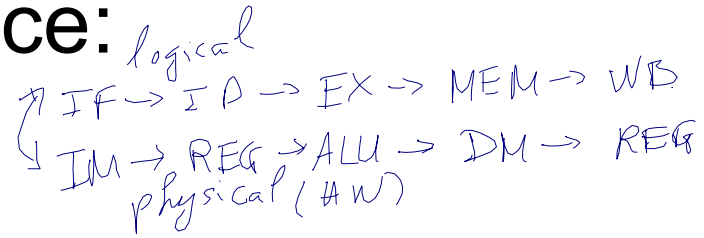

- We can resolve hazards with forwarding
  - How do we detect when to forward?

Dependencies & Forwarding

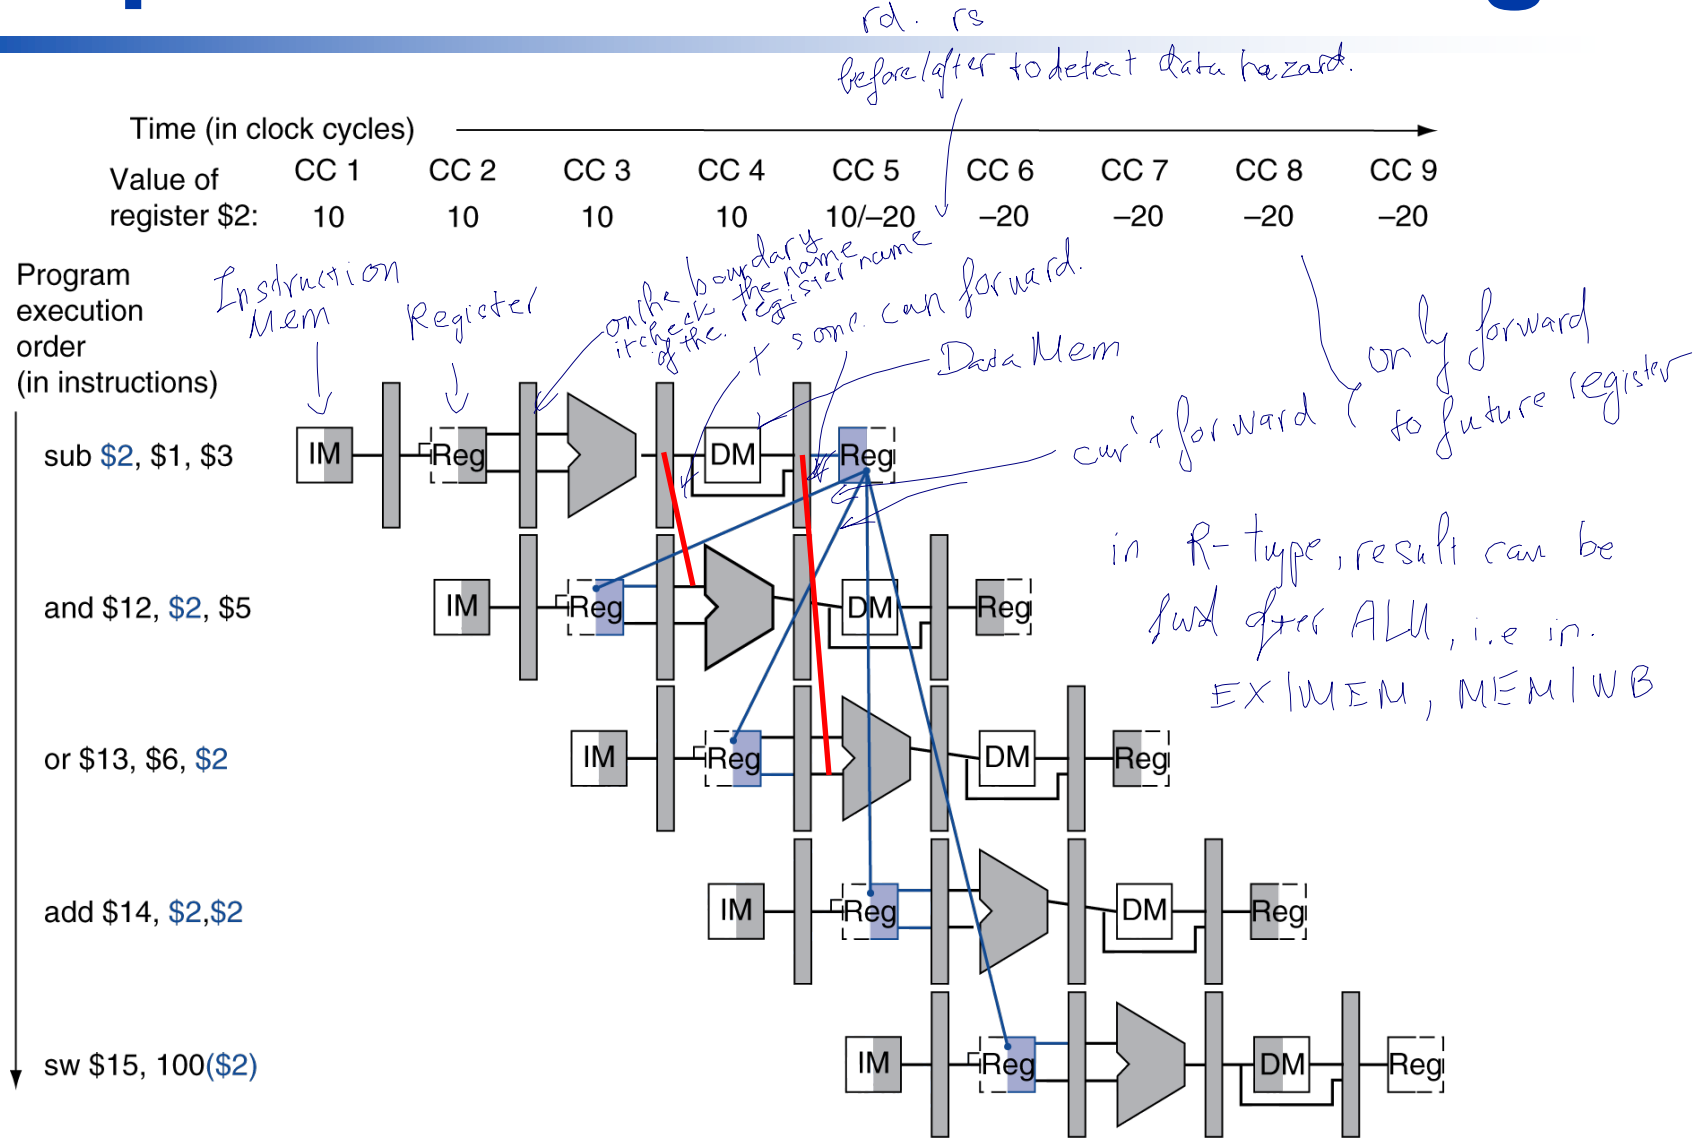

Detecting the Need to Forward

- Pass register numbers along pipeline
  - e.g., ID/EX.RegisterRs = register number for Rs sitting in ID/EX pipeline register
- ALU operand register numbers in EX stage are given by
  - ID/EX.RegisterRs, ID/EX.RegisterRt
- Data hazards when
  1a. EX/MEM.RegisterRd = ID/EX.RegisterRs
  1b. EX/MEM.RegisterRd = ID/EX.RegisterRt
  2a. MEM/WB.RegisterRd = ID/EX.RegisterRs
  2b. MEM/WB.RegisterRd = ID/EX.RegisterRt

Fwd from EX/MEM pipeline reg

Fwd from MEM/WB pipeline reg

Detecting the Need to Forward

- If the register name are the same on leading and following instructions
  - EX/MEM.RegWrite, MEM/WB.RegWrite
- And if the control signal is not $zero
  - EX/MEM.RegisterRd ≠ 0, MEM/WB.RegisterRd ≠ 0

Output to registers (if not, why need to fwd?)

not output to $zero (if output to $zero, why need fwd?)

Forwarding Paths

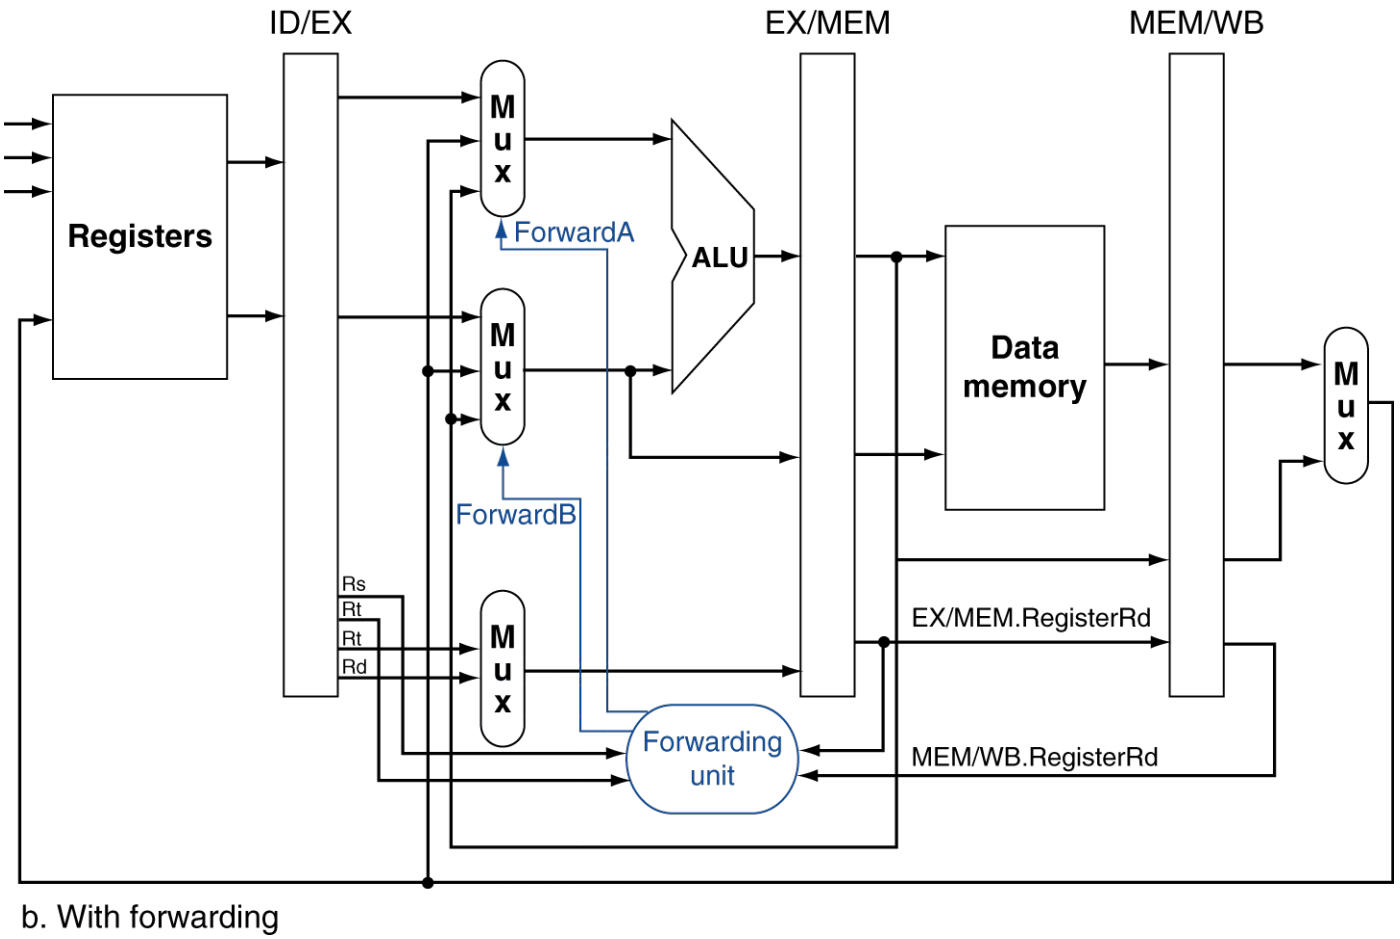

b. With forwarding

Forwarding Conditions

- EX hazard
  - if (EX/MEM.RegWrite and (EX/MEM.RegisterRd ≠ 0)
    and (EX/MEM.RegisterRd = ID/EX.RegisterRs))
    ForwardA = 10
  - if (EX/MEM.RegWrite and (EX/MEM.RegisterRd ≠ 0)
    and (EX/MEM.RegisterRd = ID/EX.RegisterRt))
    ForwardB = 10
- MEM hazard
  - if (MEM/WB.RegWrite and (MEM/WB.RegisterRd ≠ 0)
    and (MEM/WB.RegisterRd = ID/EX.RegisterRs))
    ForwardA = 01
  - if (MEM/WB.RegWrite and (MEM/WB.RegisterRd ≠ 0)
    and (MEM/WB.RegisterRd = ID/EX.RegisterRt))
    ForwardB = 01

Double Data Hazard

- Consider the sequence:

```
add $1,$1,$2
add $1,$1,$3
add $1,$1,$4
```

output affects both next instructions

- Both hazards occur
  - Want to use the most recent

Revised Forwarding Condition

- MEM hazard
  - if (MEM/WB.RegWrite and (MEM/WB.RegisterRd ≠ 0)
    and not (EX/MEM.RegWrite and (EX/MEM.RegisterRd ≠ 0)
    and (EX/MEM.RegisterRd = ID/EX.RegisterRs))
    and (MEM/WB.RegisterRd = ID/EX.RegisterRs))
    ForwardA = 01
  - if (MEM/WB.RegWrite and (MEM/WB.RegisterRd ≠ 0)
    and not (EX/MEM.RegWrite and (EX/MEM.RegisterRd ≠ 0)
    and (EX/MEM.RegisterRd = ID/EX.RegisterRt))
    and (MEM/WB.RegisterRd = ID/EX.RegisterRt))
    ForwardB = 01

this means if the value Rd can be provided in EX/MEM then MIPS should use that value instead of getting from MEM/WB stage, which data might be older than EX/MEM. (principle: take latest data EX/MEM newer than MEM/WB)

Datapath with Forwarding

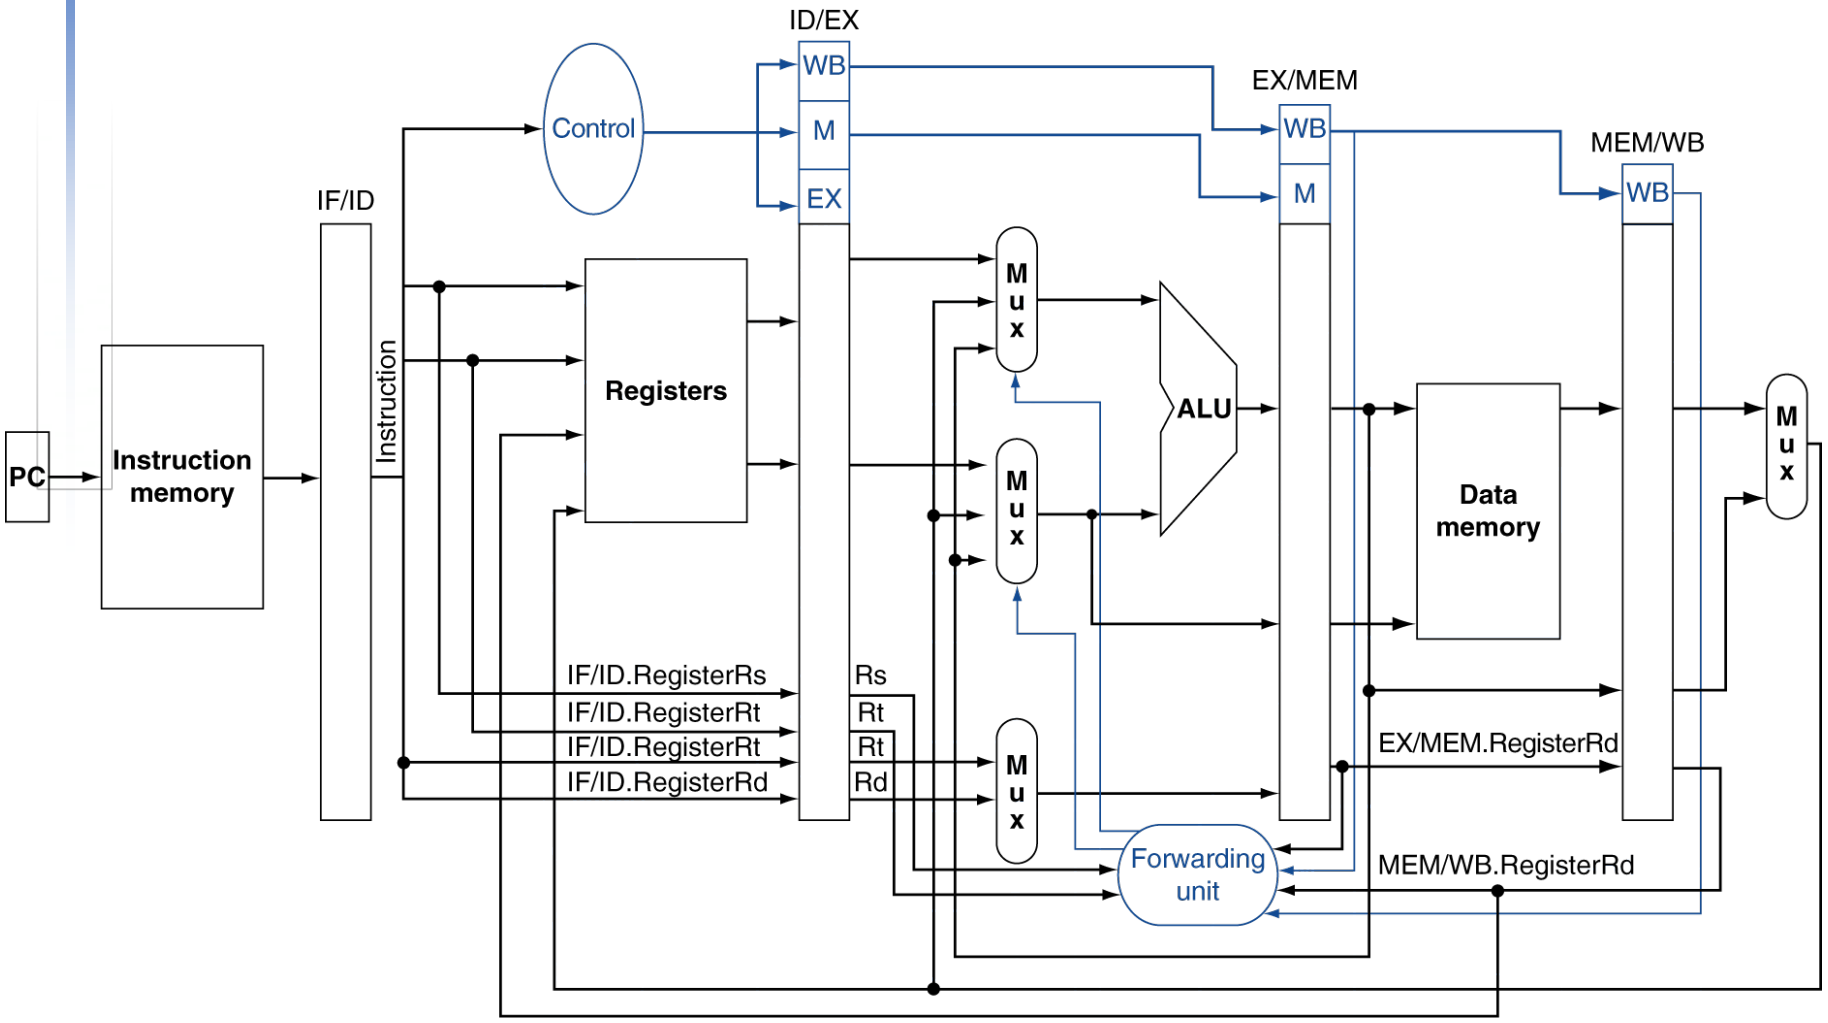

Load-Use Data Hazard

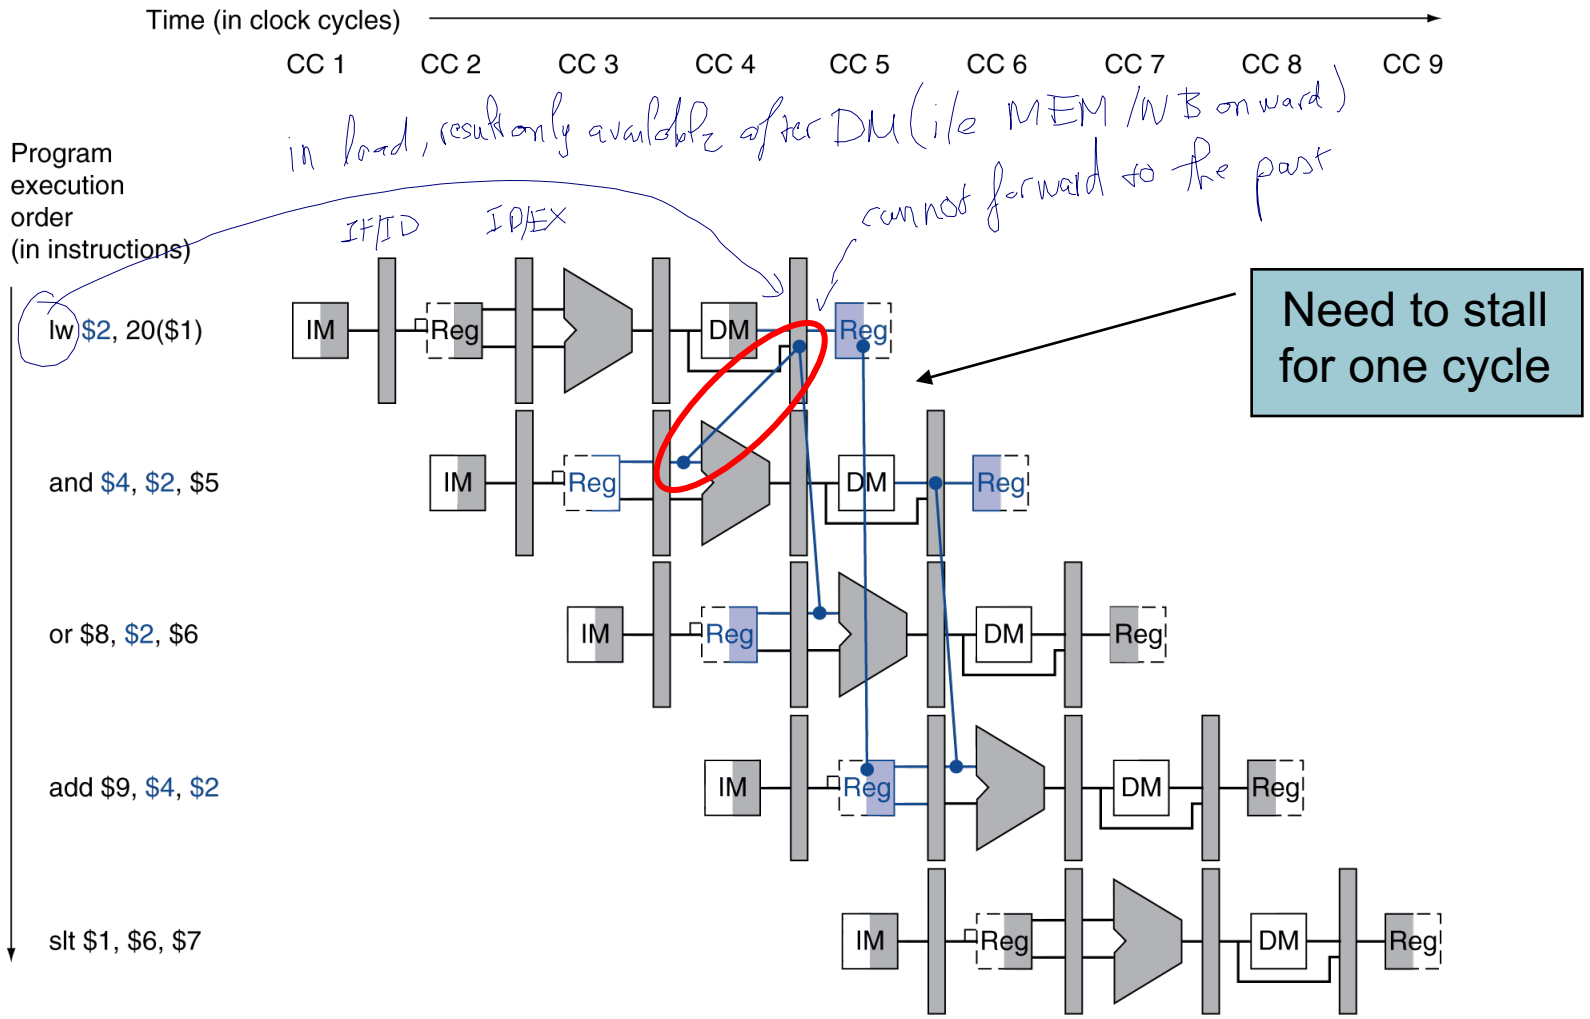

Load-Use Hazard Detection

- Check when using instruction is decoded in ID stage
- ALU operand register numbers in ID stage are given by
  - IF/ID.RegisterRs, IF/ID.RegisterRt
- Load-use hazard when
  - ID/EX.MemRead and
    ((ID/EX.RegisterRt = IF/ID.RegisterRs) or
    (ID/EX.RegisterRt = IF/ID.RegisterRt))
- If detected, stall and insert bubble

How to Stall the Pipeline

- Force control values in ID/EX register to 0
  - EX, MEM and WB do nop (no-operation)
- Prevent update of PC and IF/ID register
- Using instruction is decoded again
  - Following instruction is fetched again
  - 1-cycle stall allows MEM to read data for lw
    - Can subsequently forward to EX stage

In the one that needs to stall, all EX, MEM, WB bubble

Stall/Bubble in the Pipeline

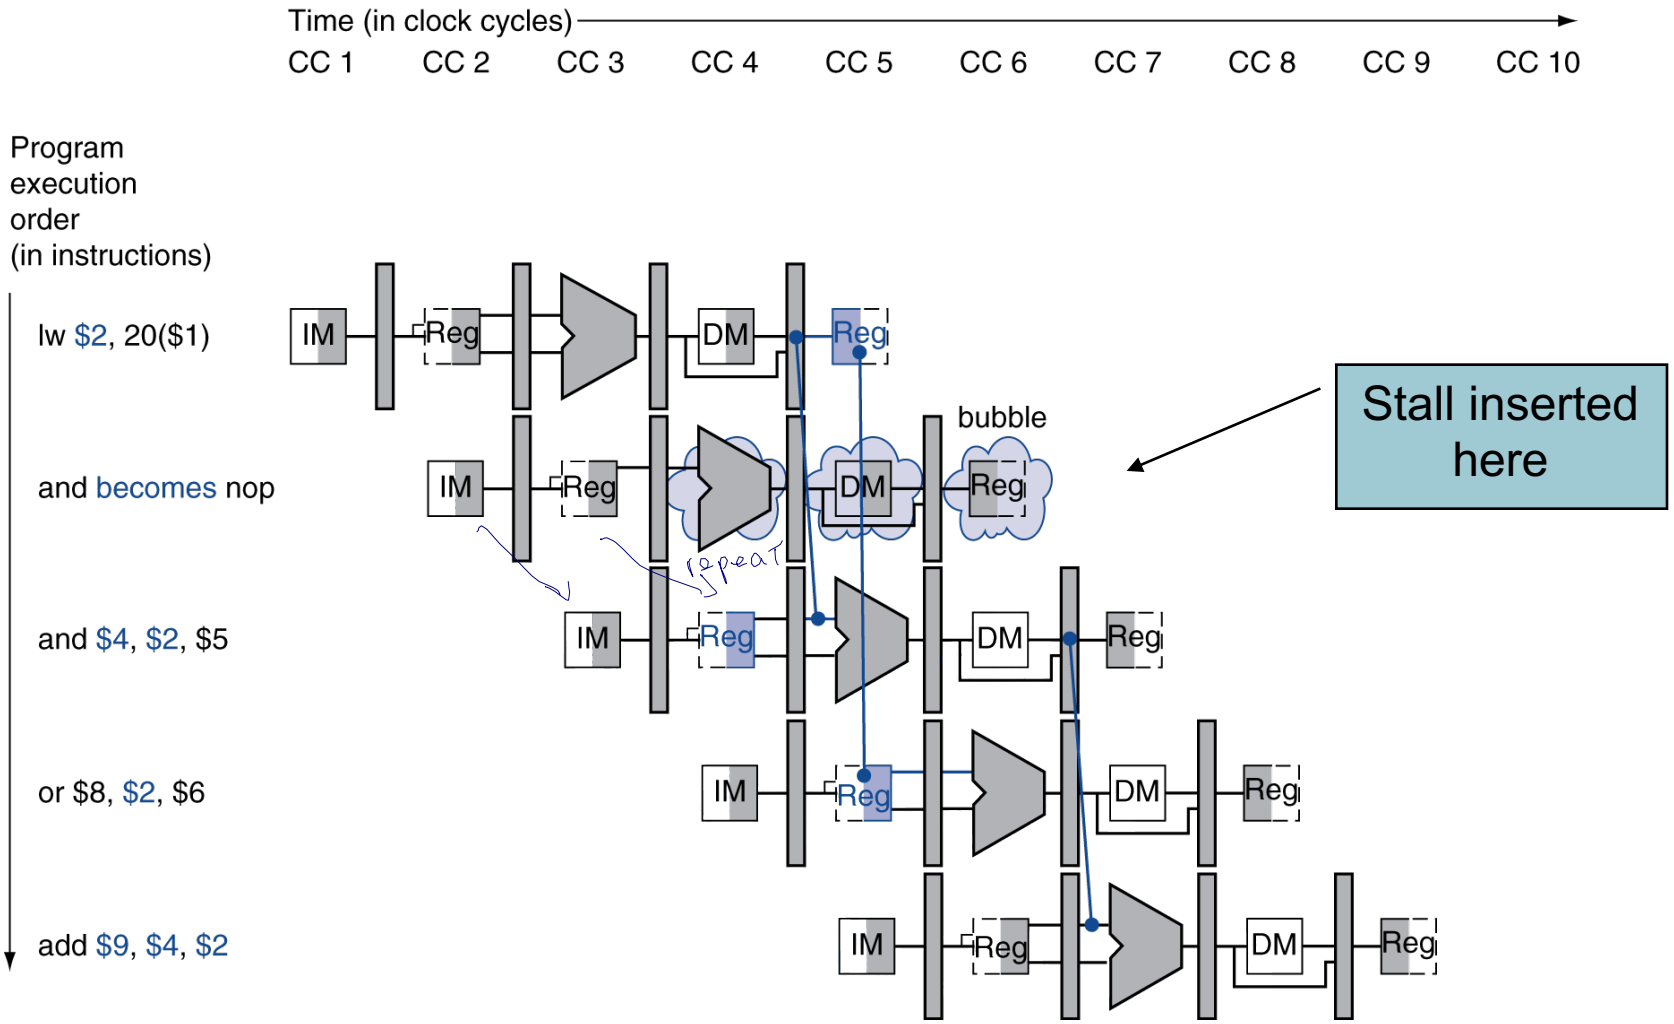

Datapath with Hazard Detection

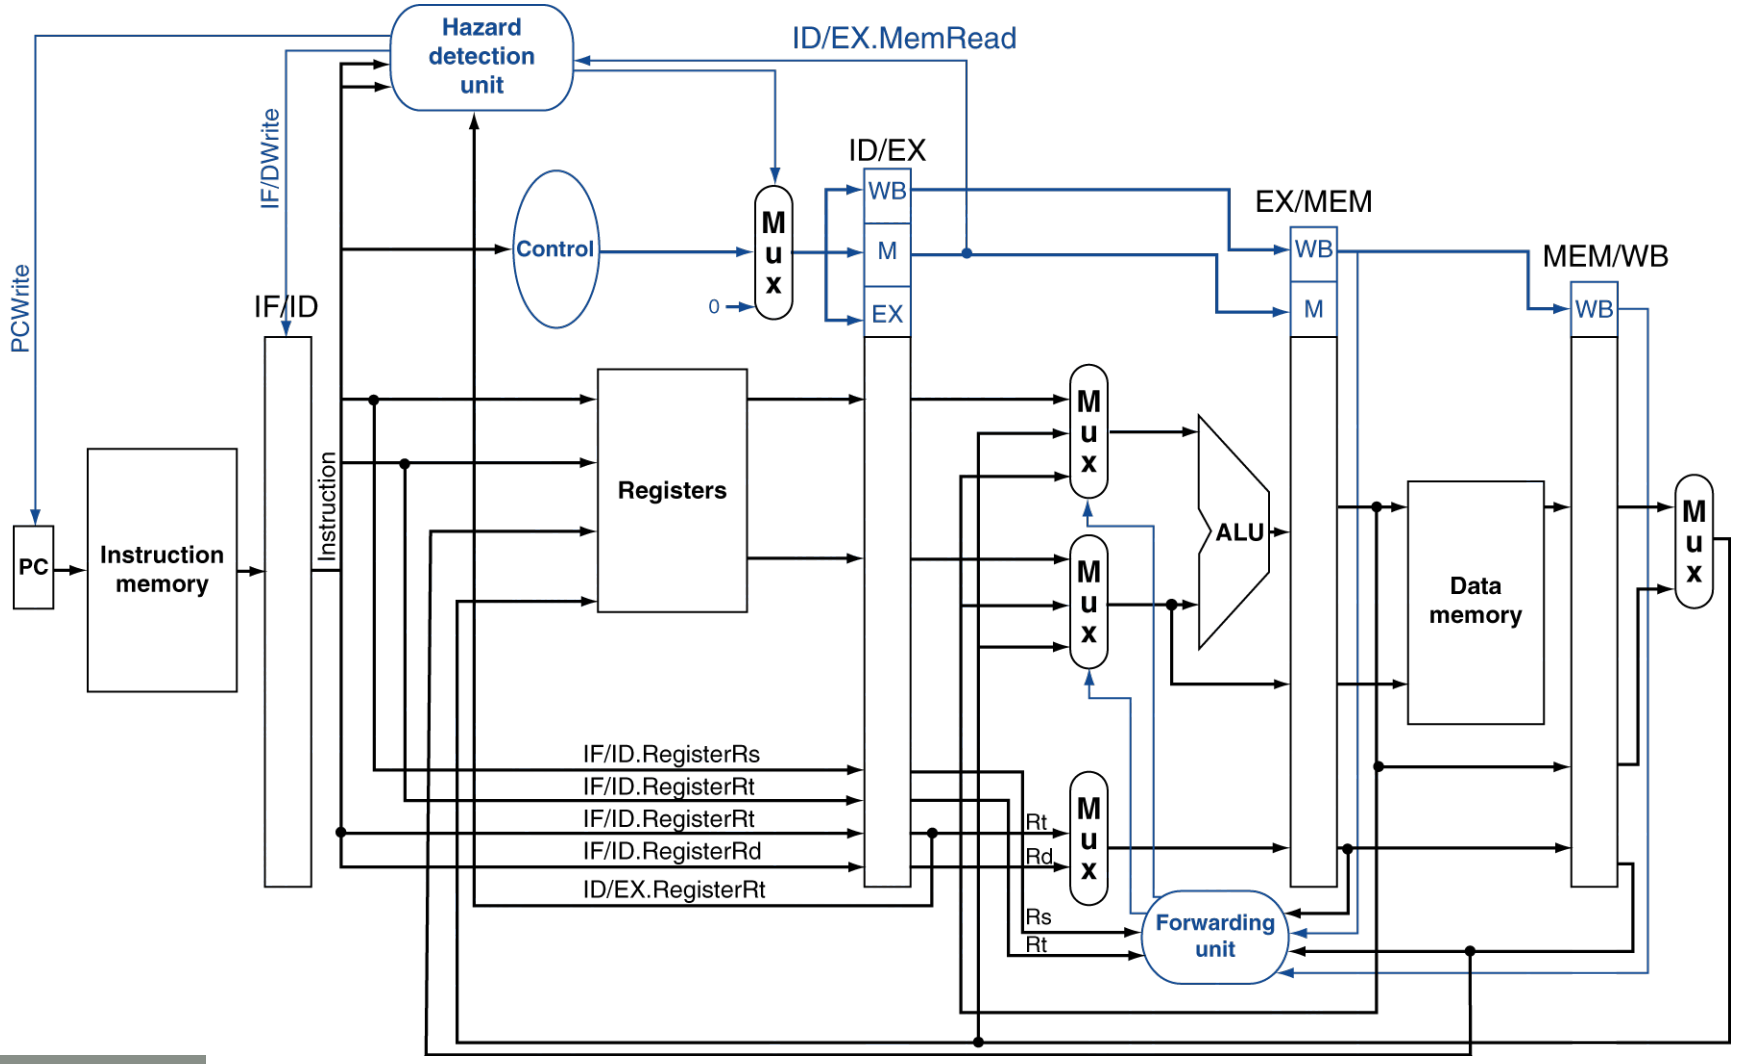

Stalls and Performance

The BIG Picture

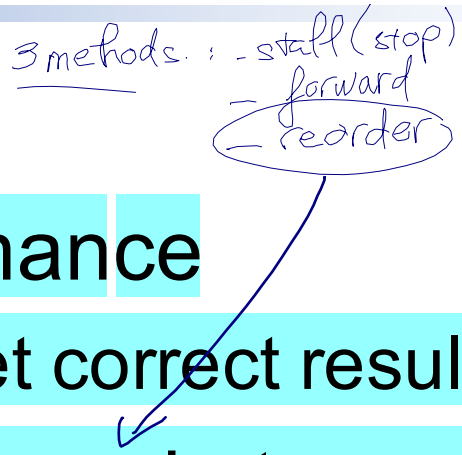

- Stalls reduce performance
  - But are required to get correct results
- Compiler can arrange code to avoid hazards and stalls
  - Requires knowledge of the pipeline structure

Branch Hazards

- branch outcome determined in MEM

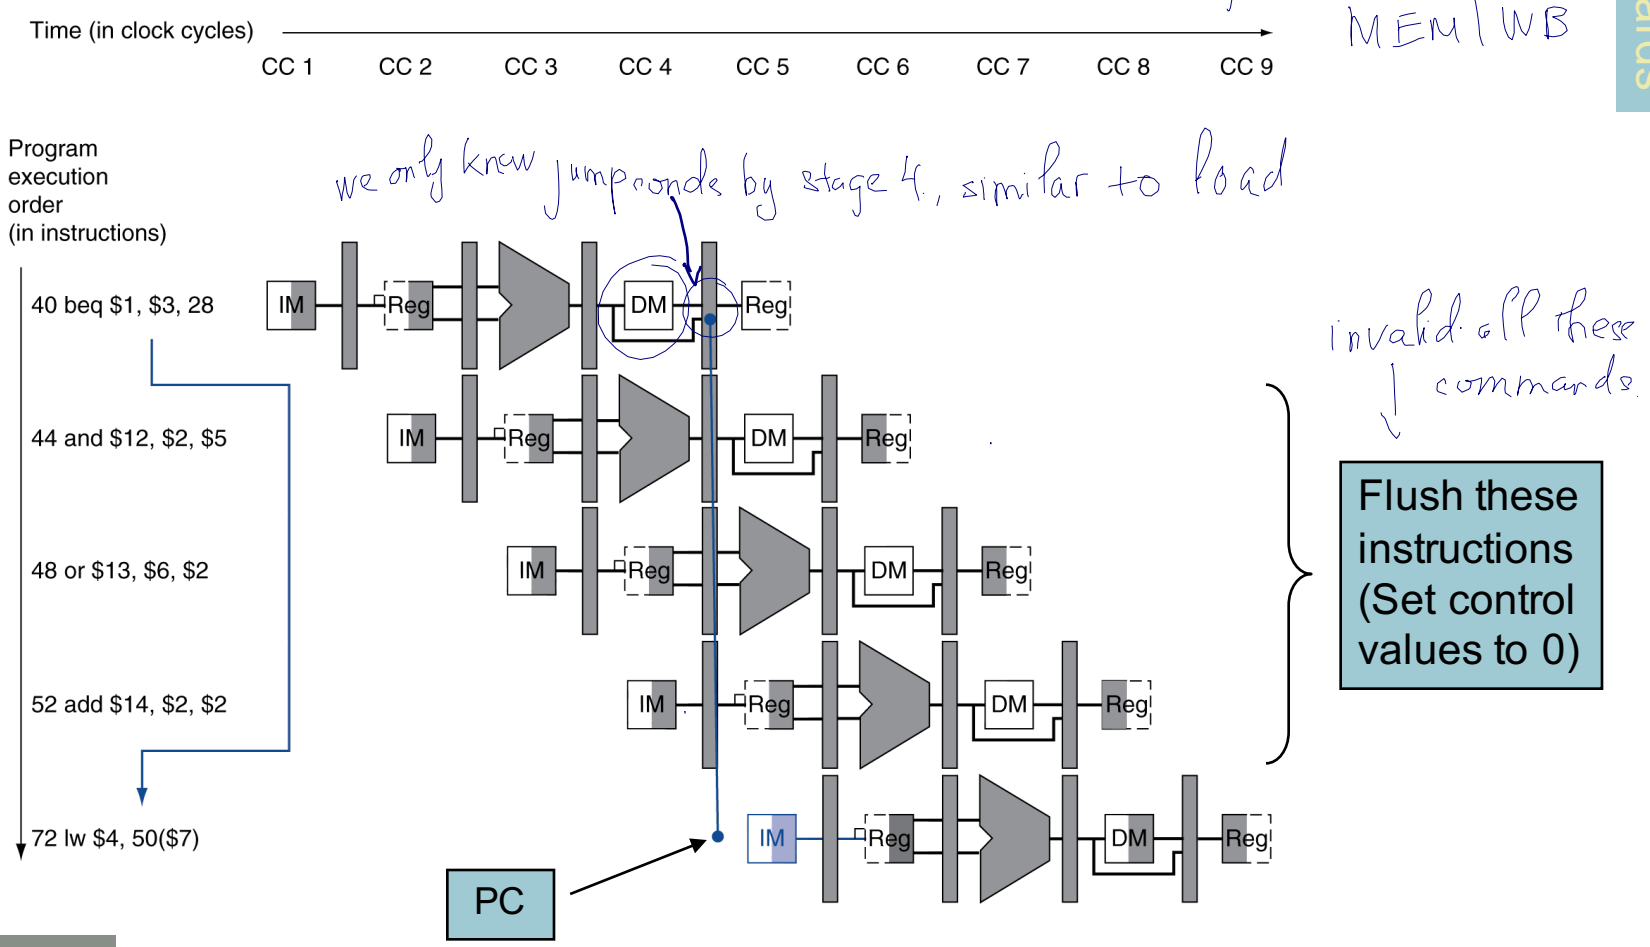

Reducing Branch Delay

- Example: branch taken

```
36:   sub   $10, $4, $8
40:   beq   $1,  $3, 7
44:   and   $12, $2, $5
48:   or    $13, $2, $6
52:   add   $14, $4, $2
56:   slt   $15, $6, $7
      ...
72:   lw    $4, 50($7)
```

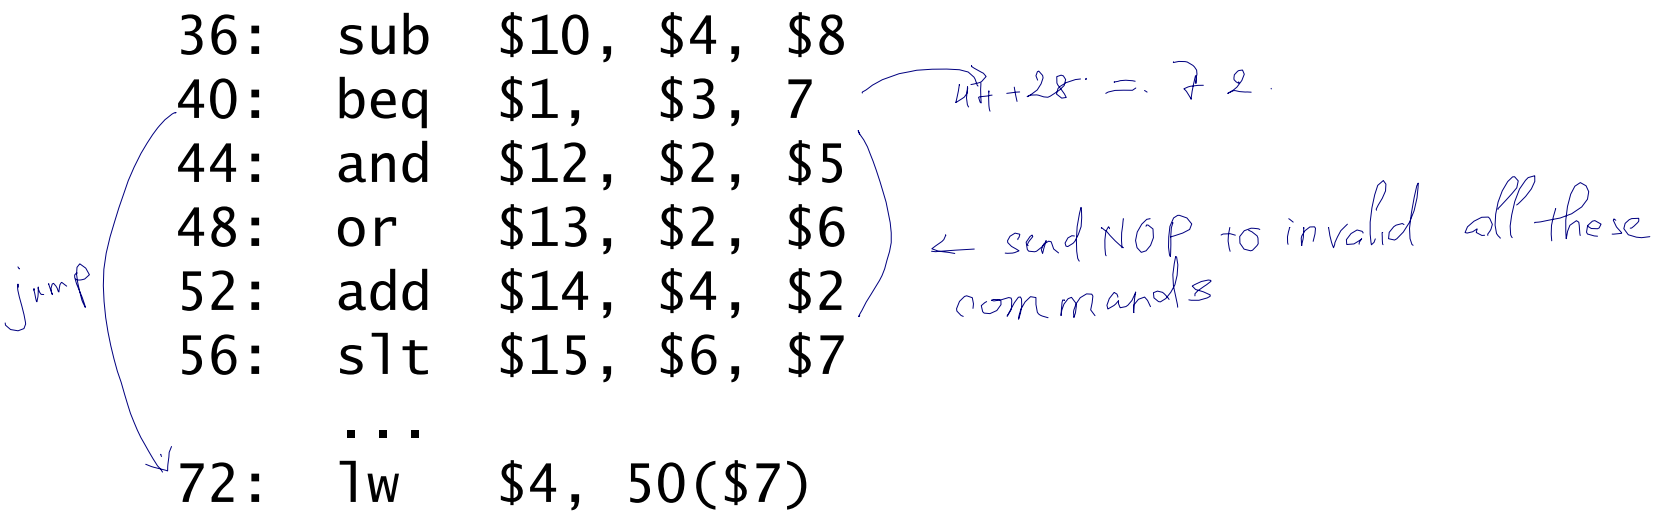

Example: Branch Taken

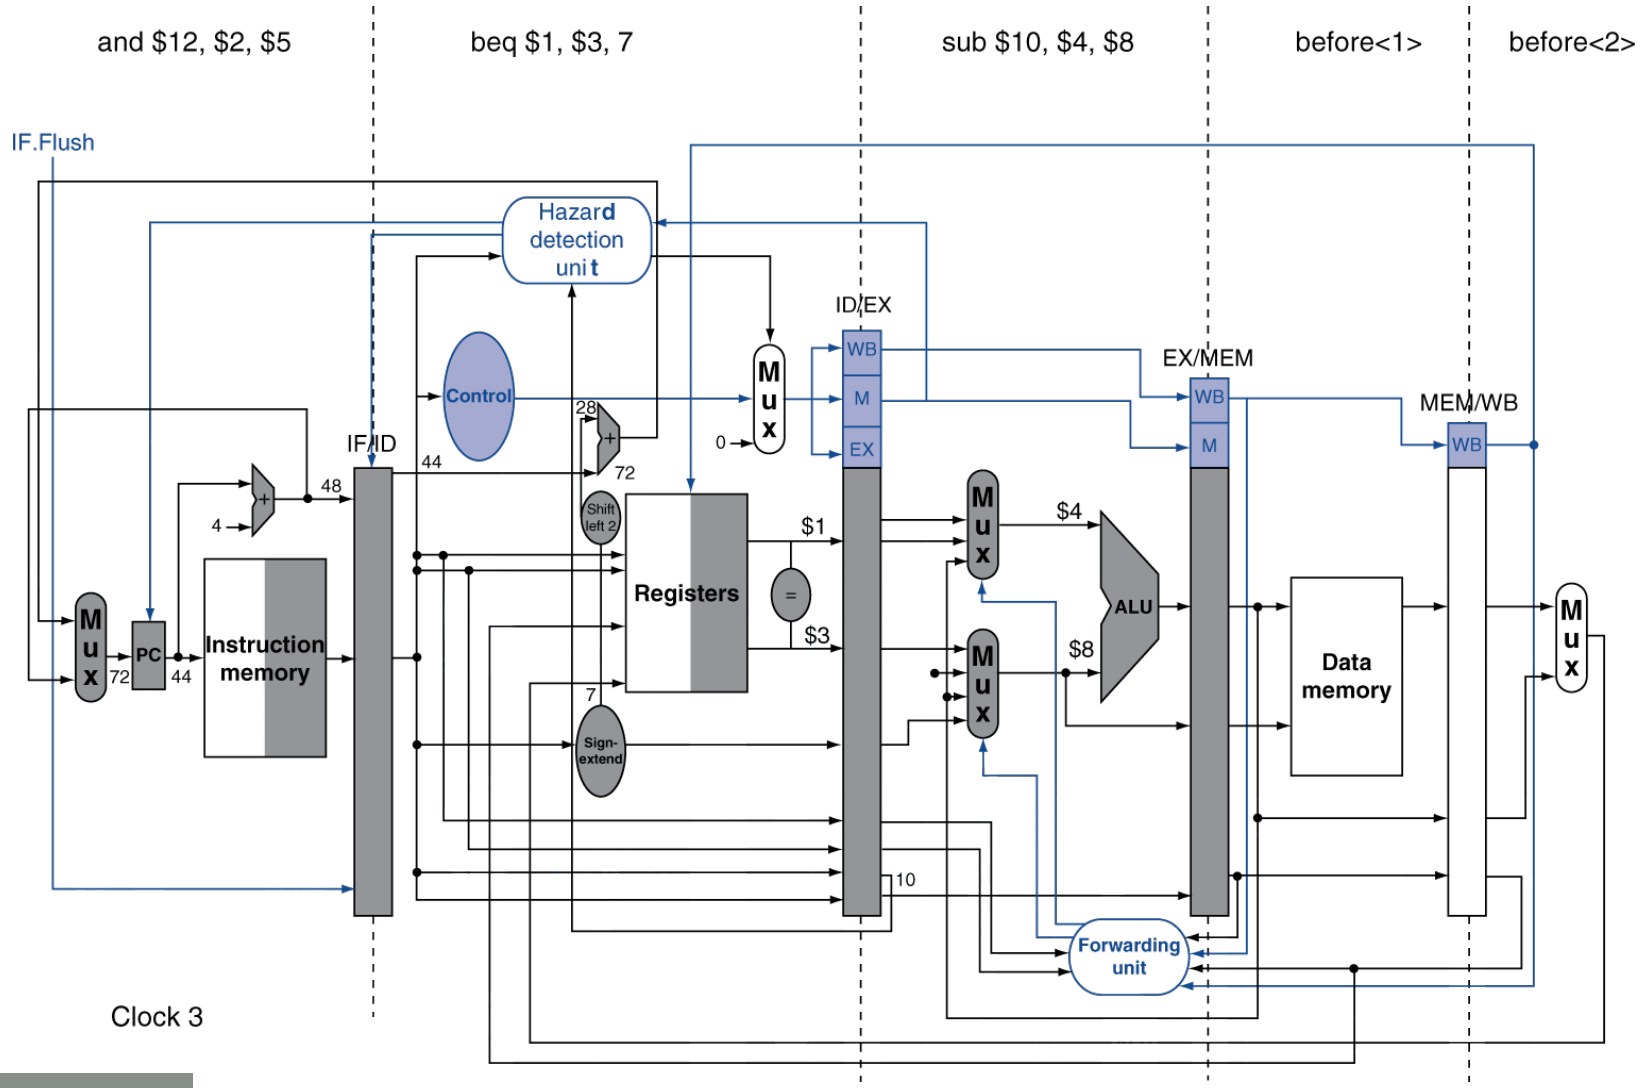

Data Hazards for Branches

- If a comparison in EXE register is a destination of an instruction at least two stages earlier

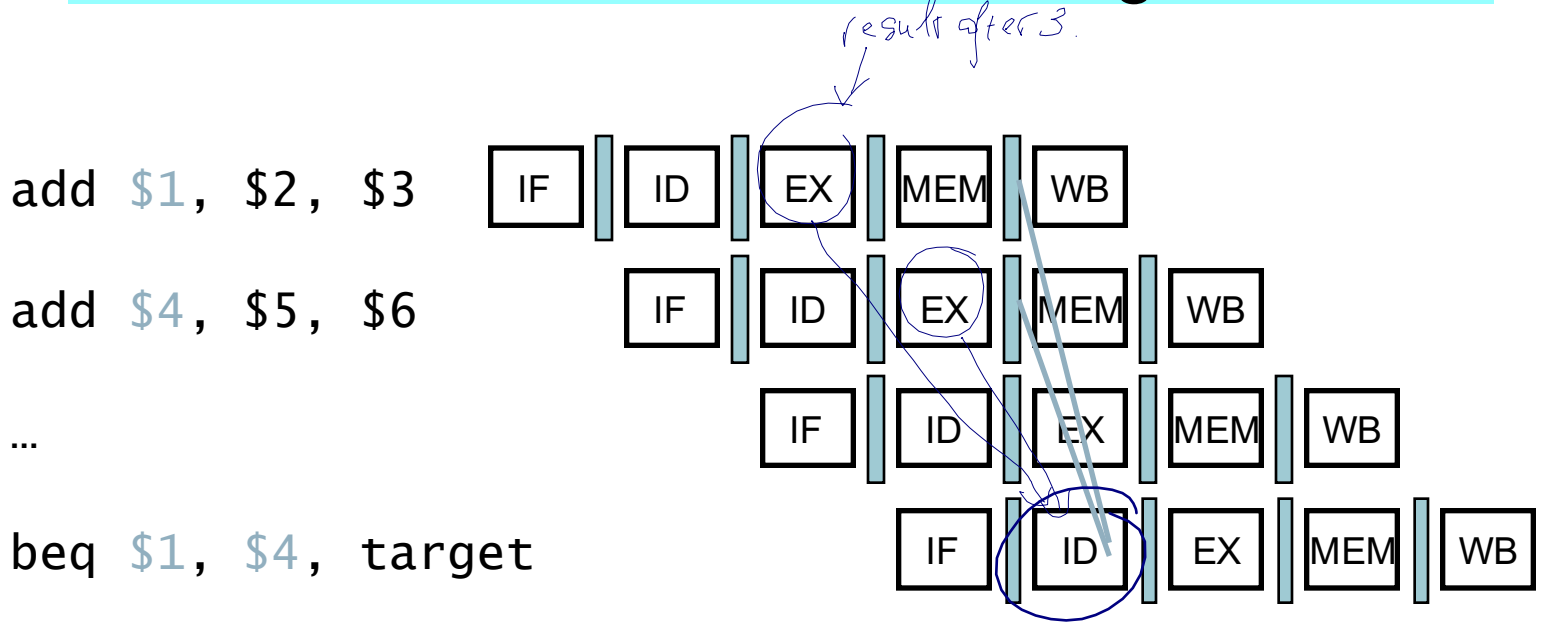

- Can resolve using forwarding

Data Hazards for Branches

- If a comparison register is a destination of preceding ALU instruction or 2nd preceding load instruction
  - Need 1 stall cycle

```
lw  $1, addr
add $4, $5, $6
beq stalled
beq $1, $4, target
```

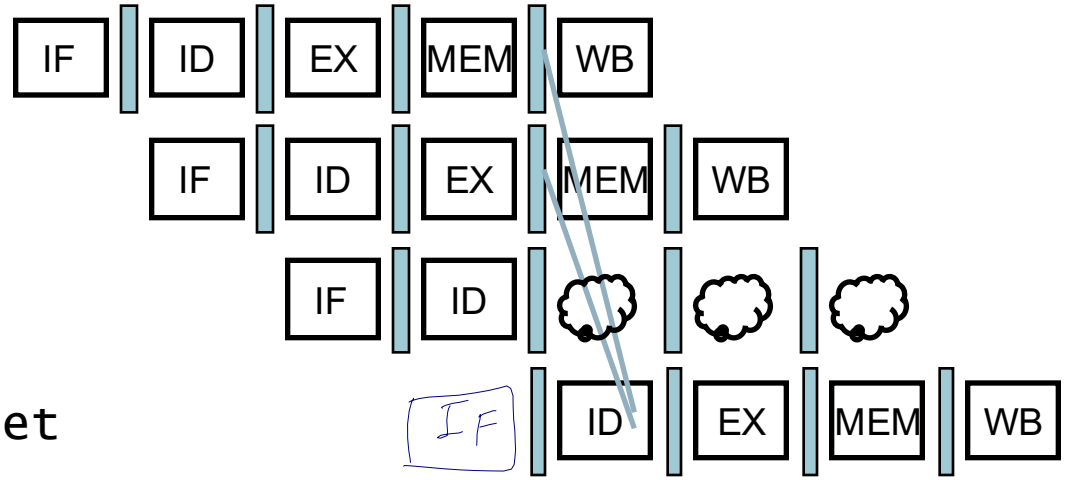

Data Hazards for Branches

- If a comparison register is a destination of immediately preceding load instruction
  - Need 2 stall cycles

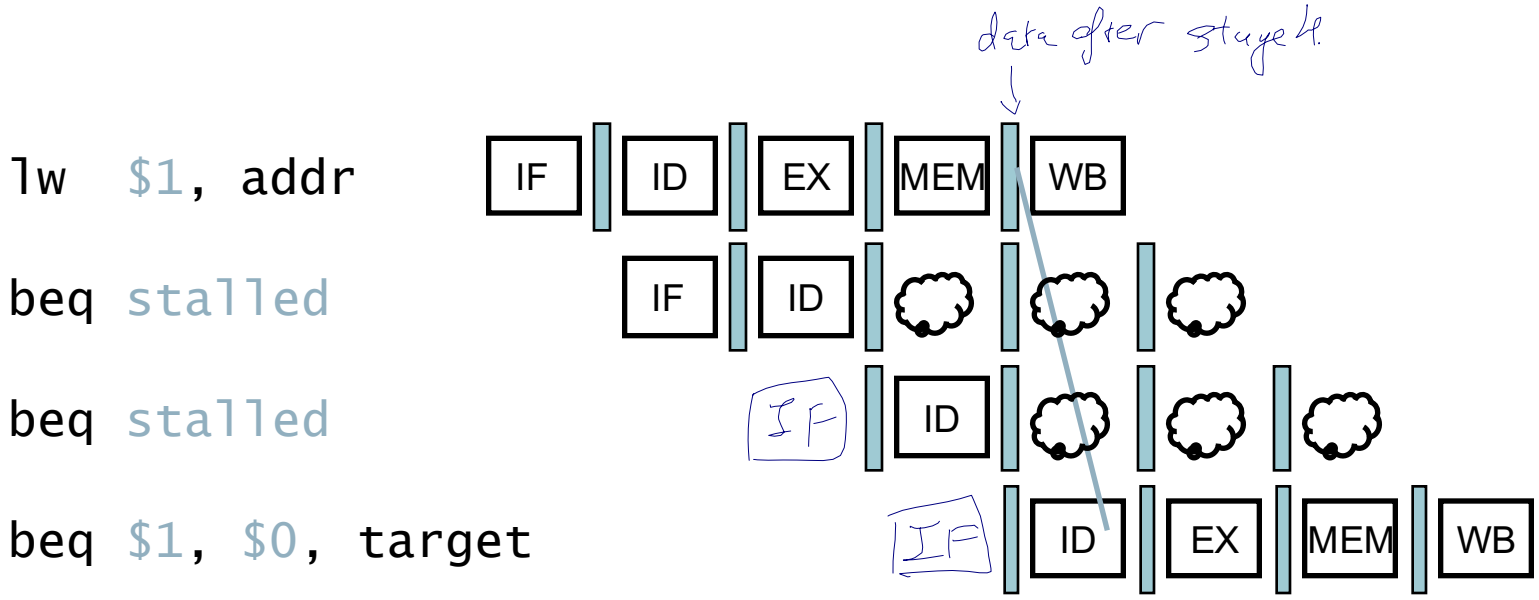

use HW device

Dynamic Branch Prediction

- In deeper and superscalar pipelines, branch penalty is more significant
- Use dynamic prediction
  - Branch prediction buffer (aka branch history table)
  - Indexed by recent branch instruction addresses
  - Stores outcome (taken/not taken)
  - To execute a branch
    - Check table, expect the same outcome
    - Start fetching from fall-through or target
    - If wrong, flush pipeline and flip prediction

using HW device to store prediction history.

static is base on past history.

1-Bit Predictor: Shortcoming

- 1 bit predictor will waste two times if wrong

  1 error, if wrong → change.

  - If mispredict on last time
  - Then will mispredict again on first time because of the changed predict bit

2-Bit Predictor

- Only change prediction on two successive mispredictions

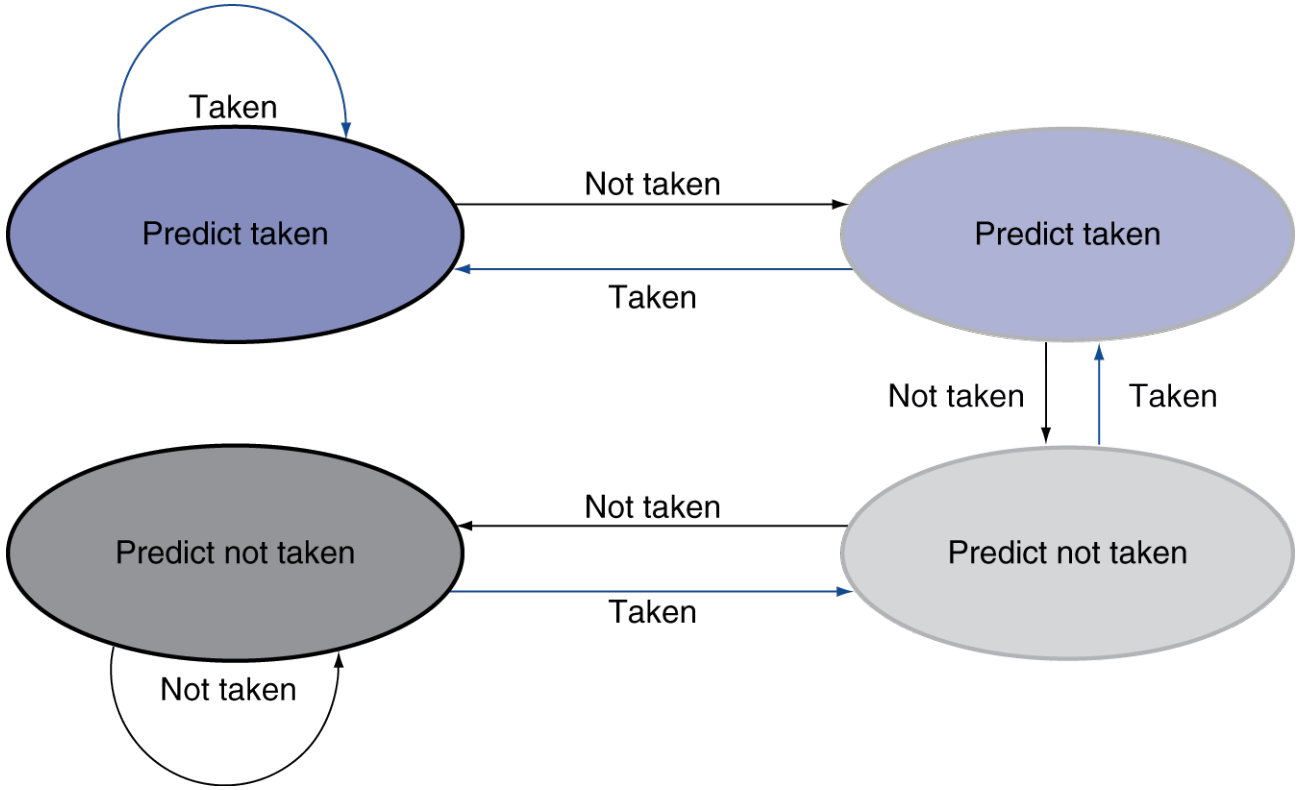

Calculating the Branch Target

- Even with predictor, still need to calculate the target address
- The branch to target address

Exceptions and Interrupts

- "Unexpected" events requiring change in flow of control
  - Different ISAs use the terms differently
- Exception
  - Arises within the CPU
    - e.g., undefined opcode, overflow, syscall, …
- Interrupt
  - From an external I/O controller
- Dealing with them without sacrificing performance is hard

Handling Exceptions

- In MIPS, exceptions managed by a System Control Coprocessor (CP0)
- Use "EPC" ("Exception Program Counter ") to save Exception instruction address
- Use "Cause Register" to save Exception reason
- Use "Rescue" register to Jump to rescue handler at 8000 00180

use HW called EPC to retrieve addr of the exception.

3 ways to handle exception:
1) EPC
2) Cause registe
3) Rescue

An Alternate Mechanism

- Vectored Interrupts
  - Handler address determined by the cause
- Example:
  - Undefined opcode: C000 0000
  - Overflow: C000 0020
  - …: C000 0040
- Instructions either
  - Deal with the interrupt, or
  - Jump to rescue handler

Handler Actions

- Read cause, and transfer to relevant handler
- Determine action required
- If restartable
  - Take corrective action
  - use EPC to return to program
- Otherwise
  - Terminate program
  - Report error using EPC, cause, …

Exceptions in a Pipeline

- Another form of control hazard
- Consider overflow on add in EX stage

  `add $1, $2, $1`

  - Prevent $1 from being clobbered
  - Complete previous instructions
  - Flush add and subsequent instructions
  - Set Cause and EPC register values
  - Transfer control to handler
- Similar to mispredicted branch
  - Use much of the same hardware

Pipeline with Exceptions

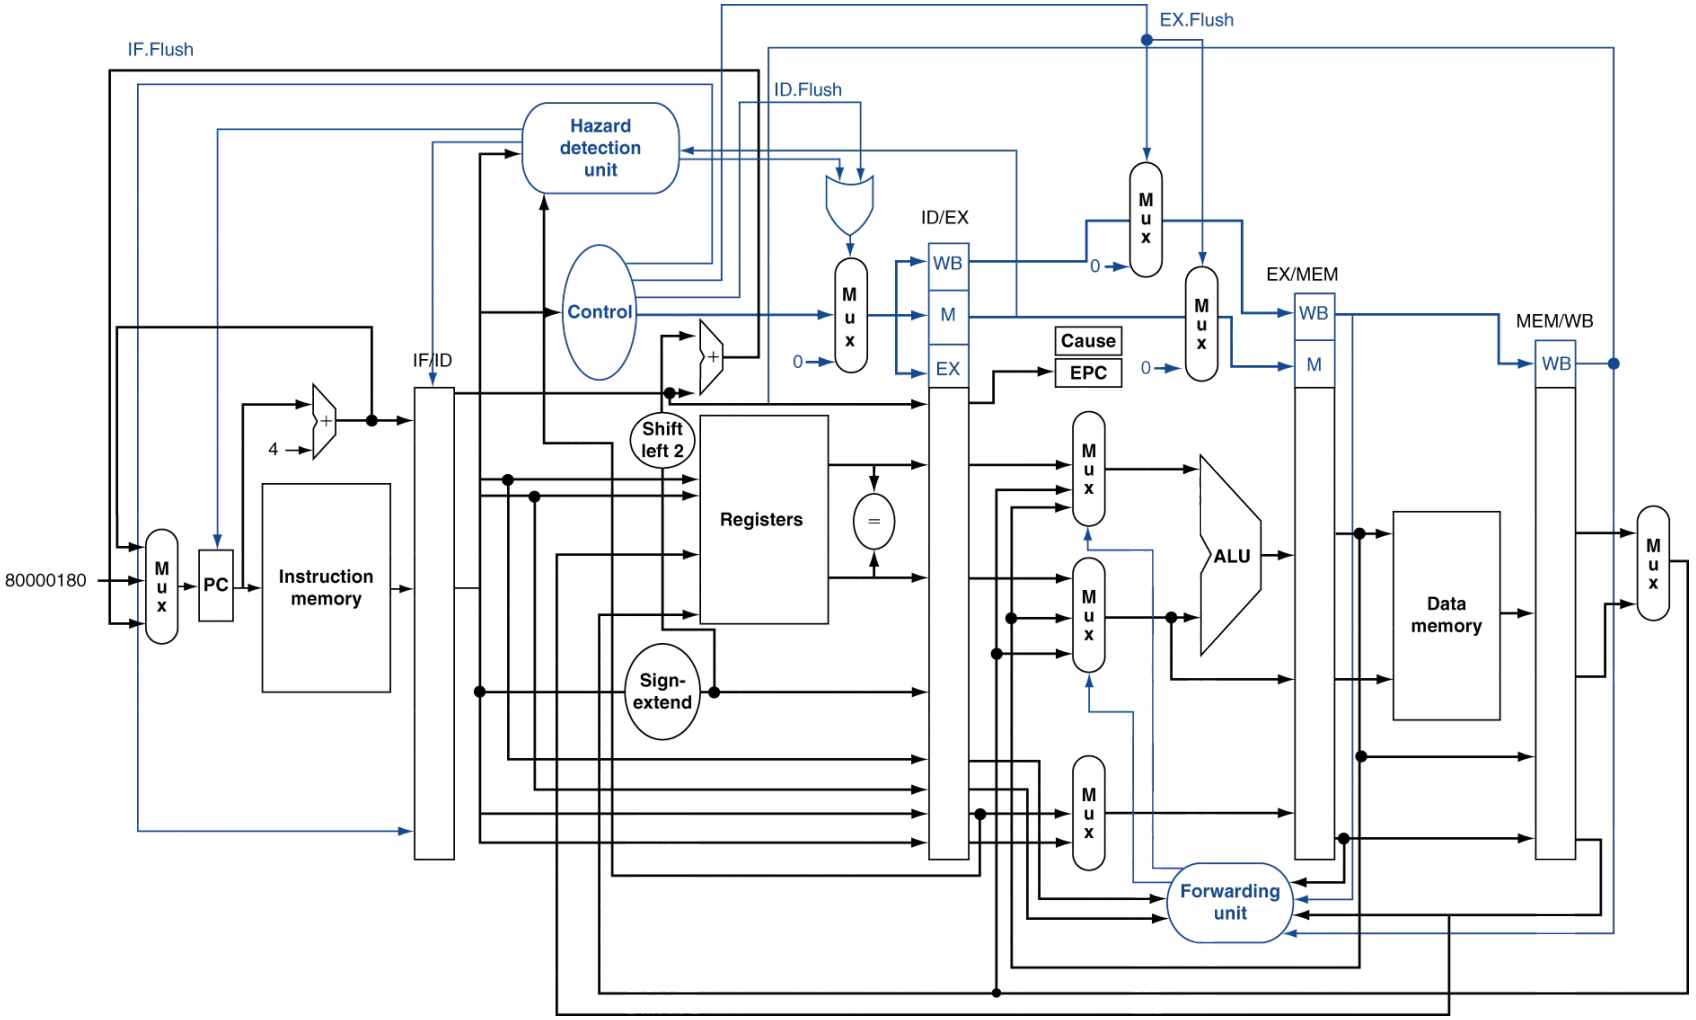

Exception Properties

- Restartable exceptions
  - Pipeline can flush the instruction
  - Handler executes, then returns to the instruction
    - Refetched and executed from scratch
- PC saved in EPC register
  - Identifies causing instruction
  - Actually PC + 4 is saved
    - Handler must adjust

Exception Example

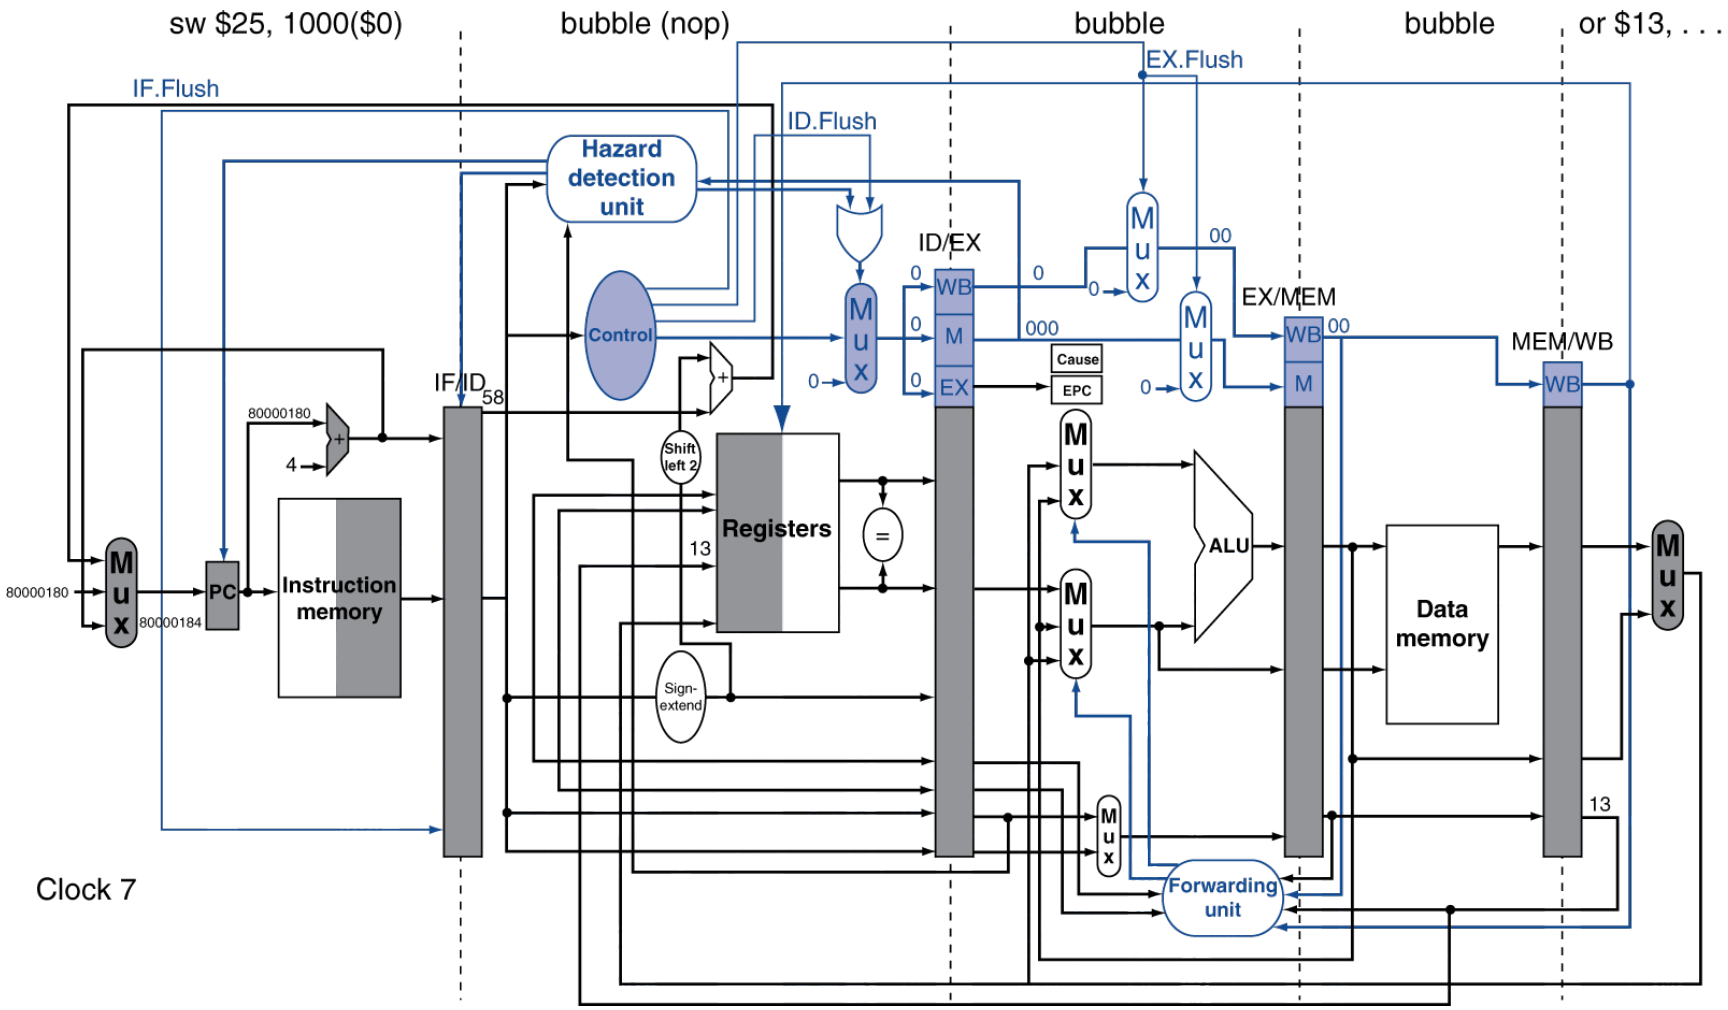

Multiple Exceptions

- Pipelining overlaps multiple instructions
  - Could have multiple exceptions at once
- Simple approach: deal with exception from earliest instruction
  - Flush subsequent instructions
  - “Precise” exceptions
- In complex pipelines
  - Multiple instructions issued per cycle
  - Out-of-order completion
  - Maintaining precise exceptions is difficult!

Unit 10 Homework

1. 1. Explain what is “pipelined instructions” and how does it work ? Use an example to
2. compare the non-pipeline and pipeline difference ?
2. 2. What are the potential hazard problems in the pipeline instructions and how to solve each problem ?
3. 3. What are “forwarding” and “stall” ? When and how do we use them ?
4. 4. What is the branch hazard ? How to fix the branch hazard ?
5. 5. What is exception ? How does MIPS handles the exception problem ?