


SCHEMATIC

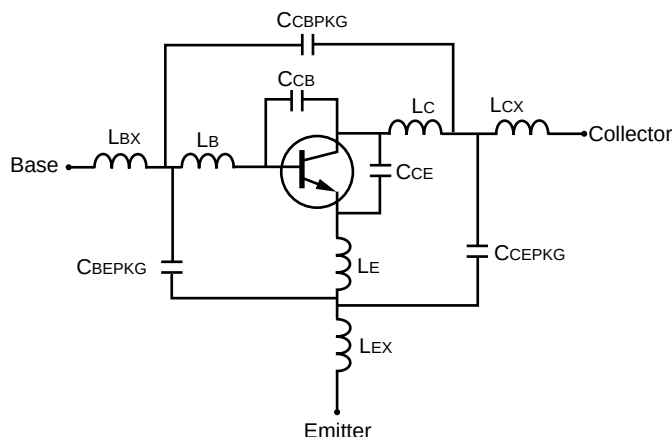

BJT NONLINEAR MODEL PARAMETERS ⁽¹⁾

Parameters	Q1	Parameters	Q1
IS	2.75e-16	MJC	0.37
BF	192.5	XCJC	1
NF	0.9963	CJS	0
VAF	39	VJS	0.75
IKF	0.687	MJS	0
ISE	24.2e-12	FC	0.5
NE	10	TF	10e-12
BR	17.7	XTF	0.5
NR	0.9946	VTF	1
VAR	2	ITF	0.001
IKR	0.01	PTF	35
ISC	145e-12	TR	1e-11
NC	46.6	EG	1.11
RE	0.75	XTB	0
RB	9	XTI	3
RBM	3.5	KF	0
IRB	0.005	AF	1
RC	4		
CJE	0.9e-12		
VJE	0.83		
MJE	0.23		
CJC	0.3e-12		
VJC	0.64		

ADDITIONAL PARAMETERS

Parameters	NE667M04
CCB	0.07e-12
CCE	0.6e-12
LB	0.97e-9
LC	0.4e-9
LE	0.23e-9
CCBPKG	0.001e-12
CCEPKG	0.35e-12
CBEPK	0.25e-12
LBX	0.2e-9
LCX	0.2e-9
LEX	0.07e-9

MODEL RANGE

Frequency: 0.1 to 6 GHz
 Bias: $V_{CE} = 1\text{ V to }5\text{ V}$, $I_C = 1\text{ mA to }30\text{ mA}$
 Date: 03/2002

(1) Gummel-Poon Model

Life Support Applications

These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.

EXCLUSIVE NORTH AMERICAN AGENT FOR NEC RF, MICROWAVE & OPTOELECTRONIC SEMICONDUCTORS

CEL CALIFORNIA EASTERN LABORATORIES • Headquarters • 4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • Telex 34-6393 • FAX (408) 988-0279
 DATA SUBJECT TO CHANGE WITHOUT NOTICE

Internet: <http://WWW.CEL.COM>

03/21/2002