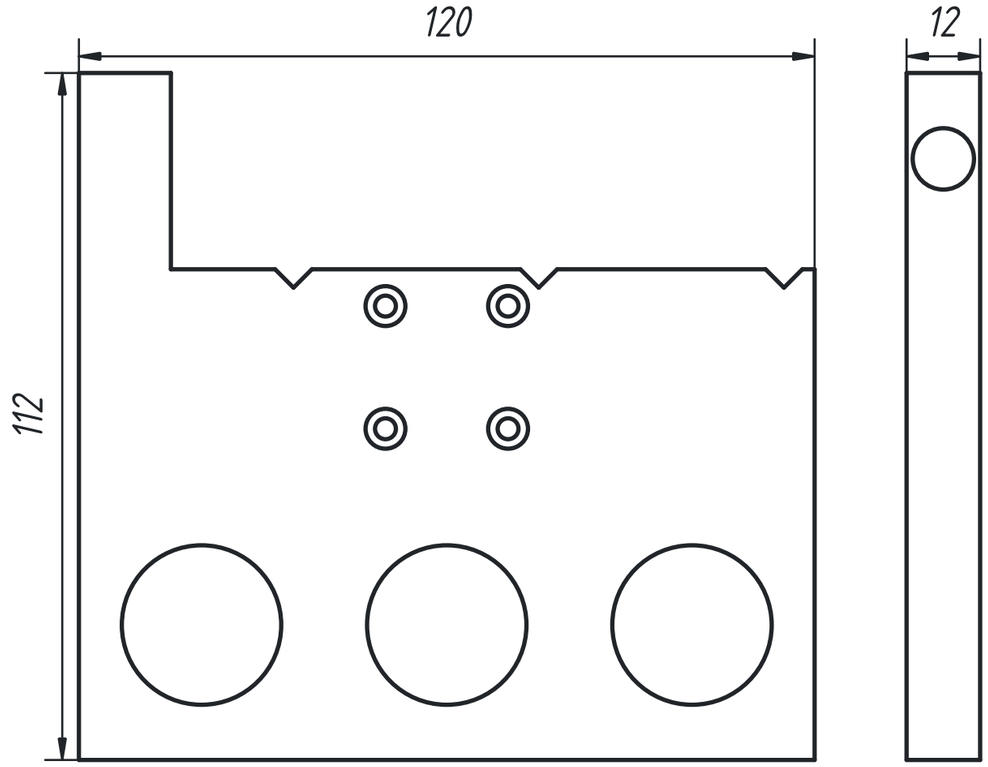

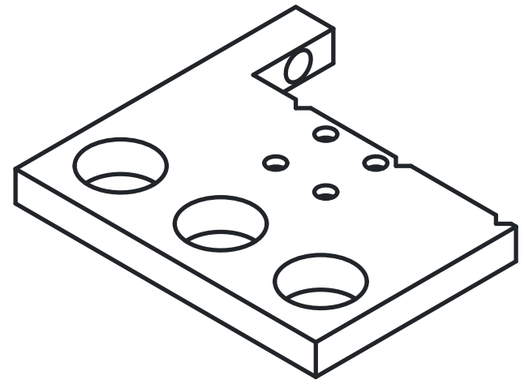

Sizes in mm. Tolerances to ISO 2768-mK unless stated.
Take any size not shown from the STEP file of the same number.
Break sharp edges 0.2 mm.
Holes for screws are clearance holes, unless a note taps them.
M26 x 0.706 threads for the objectives; V-grooves, 90 degrees and 3 mm deep, for the detent. Counterbored for 4 x M3.

Part Changer plate		
Drawing OPTIMA-H06	Quantity 1	Scale 1:1
Material 6061-T6 aluminium	Finish Black anodized	
OPTIMA microscope. Sizes in mm. First-angle projection.		