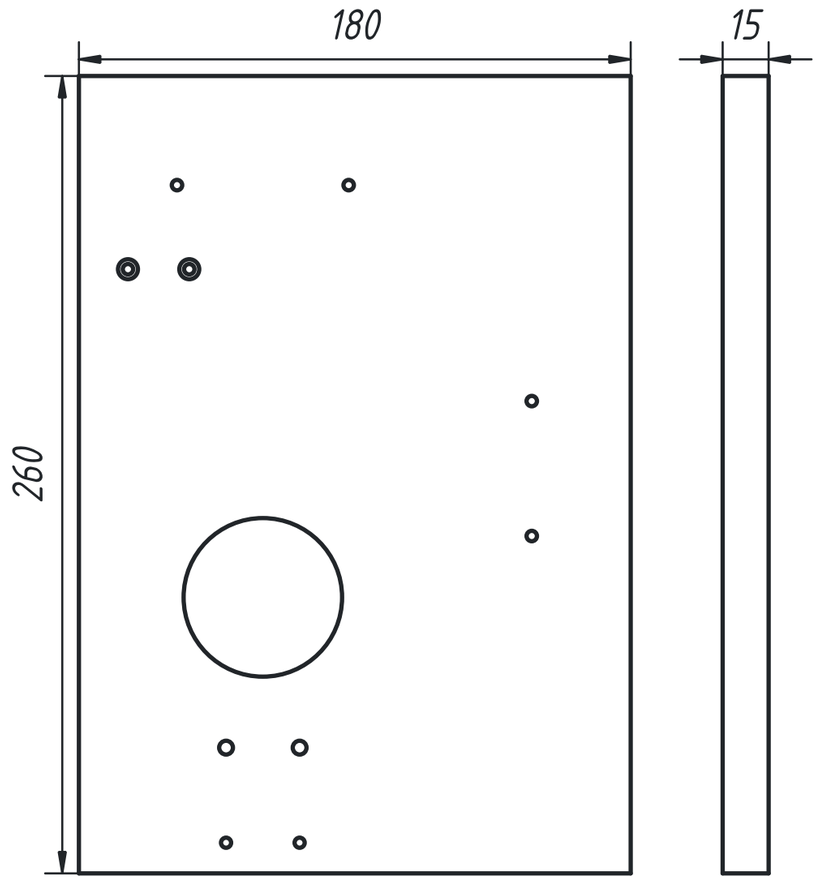

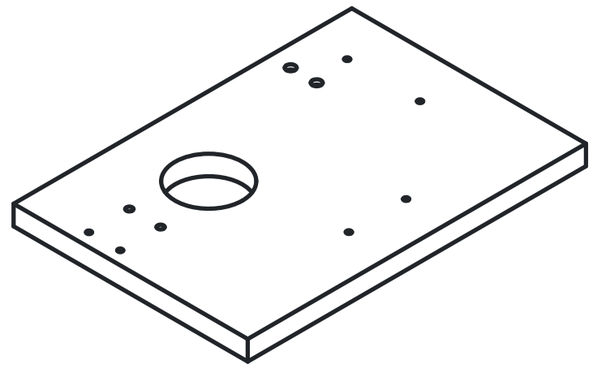

mm. Tolerances to ISO 2768-mK unless stated.
size not shown from the STEP file of the same number.
arp edges 0.2 mm.
screws are clearance holes, unless a note taps them.
ad (2035-40 UNS) through it, for the TTL200-A. Tapped: 6 x M3 x 6 deep, 2 x M4 x 8 deep, 2 x M6 x 12 deep. Counterbored for 2 x M3.

Part: Upper deck		
Drawing: OPTIMA-H03	Quantity: 1	Scale: 1:2
Material: 6061-T6 aluminium	Finish: Black anodized	
OPTIMA microscope. Sizes in mm. First-angle projection.		