
FD-55E Series

Technical Specifications

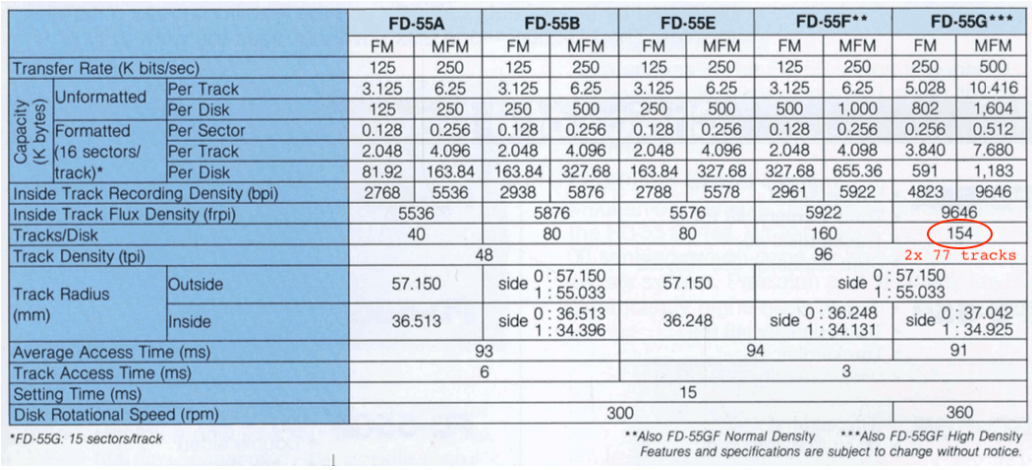

			FD-55A		FD-55B		FD-55E		FD-55F**		FD-55G***	
			FM	MFM	FM	MFM	FM	MFM	FM	MFM	FM	MFM
Transfer Rate (K bits/sec)			125	250	125	250	125	250	125	250	250	500
Capacity (K bytes)	Unformatted	Per Track	3.125	6.25	3.125	6.25	3.125	6.25	3.125	6.25	5.028	10.416
		Per Disk	125	250	250	500	250	500	500	1,000	802	1,604
	Formatted (16 sectors/ track)*	Per Sector	0.128	0.256	0.128	0.256	0.128	0.256	0.128	0.256	0.256	0.512
		Per Track	2.048	4.096	2.048	4.096	2.048	4.096	2.048	4.098	3.840	7.680
		Per Disk	81.92	163.84	163.84	327.68	163.84	327.68	327.68	655.36	591	1,183
Inside Track Recording Density (bpi)			2768	5536	2938	5876	2788	5578	2961	5922	4823	9646
Inside Track Flux Density (frpi)			5536		5876		5576		5922		9646	
Tracks/Disk			40		80		80		160		154	
Track Density (tpi)			48				96				2x 77 tracks	
Track Radius (mm)		Outside	57.150		side 0 : 57.150 1 : 55.033		57.150		side 0 : 57.150 1 : 55.033			
		Inside	36.513		side 0 : 36.513 1 : 34.396		36.248		side 0 : 36.248 1 : 34.131		side 0 : 37.042 1 : 34.925	
Average Access Time (ms)			93				94				91	
Track Access Time (ms)			6				3					
Setting Time (ms)			15									
Disk Rotational Speed (rpm)			300								360	

*FD-55G: 15 sectors/track

**Also FD-55GF Normal Density ***Also FD-55GF High Density
Features and specifications are subject to change without notice.


TEAC FD55 technical specifications
(Source: Brochure TEAC FD-55 Series)

The double-sided TEAC FD-55F is already a somewhat exotic drive. But the TEAC FD-55E is even more exotic and can only be used under PC/MS-DOS with special programs like 22DISK, UniForm-PC or SuperCopy.


The TEAC FD-55E is a single-sided 5.25 inch drive that can write 96 tracks per inch (TPI) and corresponds to the 'capacity' of the TEAC FD-55B. But be careful. Both drives are fundamentally different!

In the CP/M world the TEAC FD-55E can be found often. There are some disk formats with one side and 80 tracks or 96 TPI. You can easily test this with the DOS program 22DISK. Simply select the appropriate format and format the diskette (initialize). This works without any problems.


Pictures

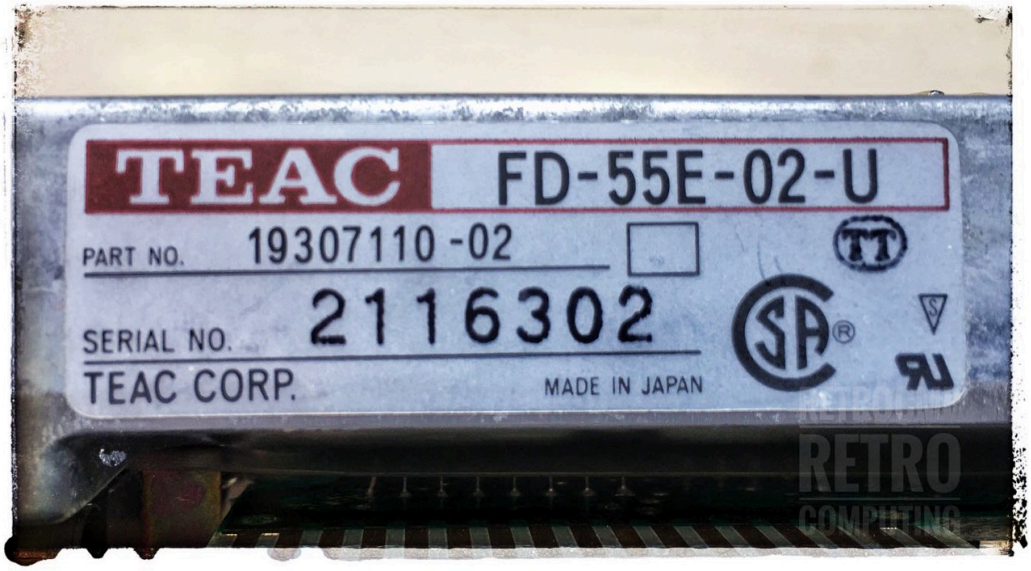


TEAC FD-55E

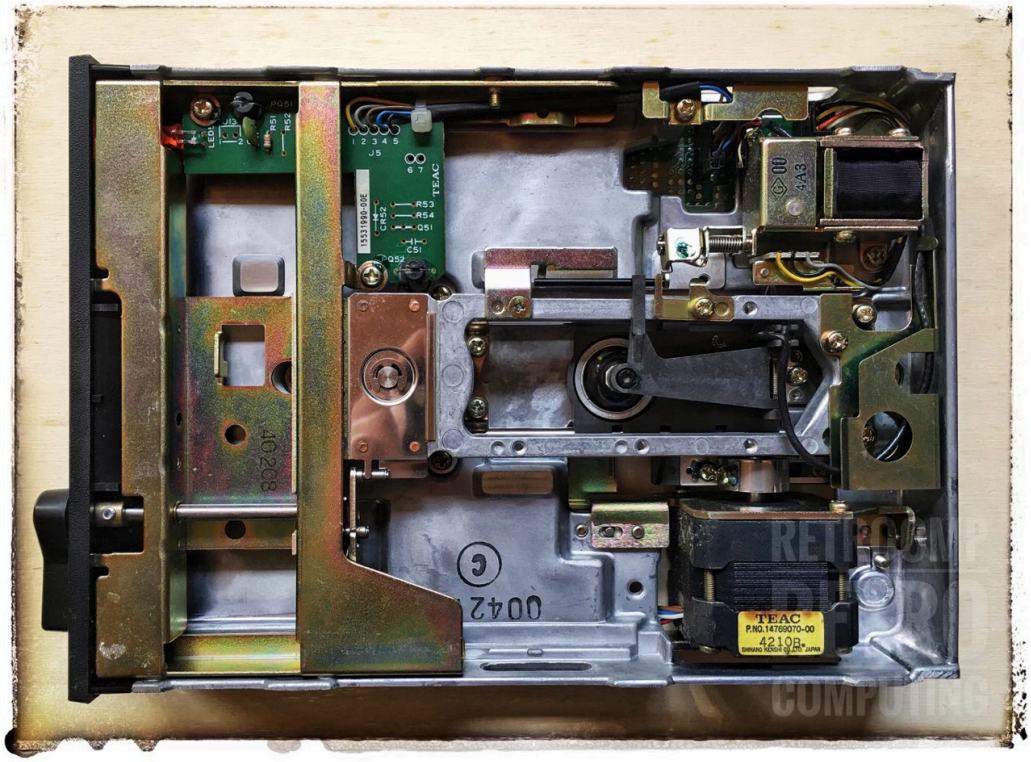


TEAC FD-55E

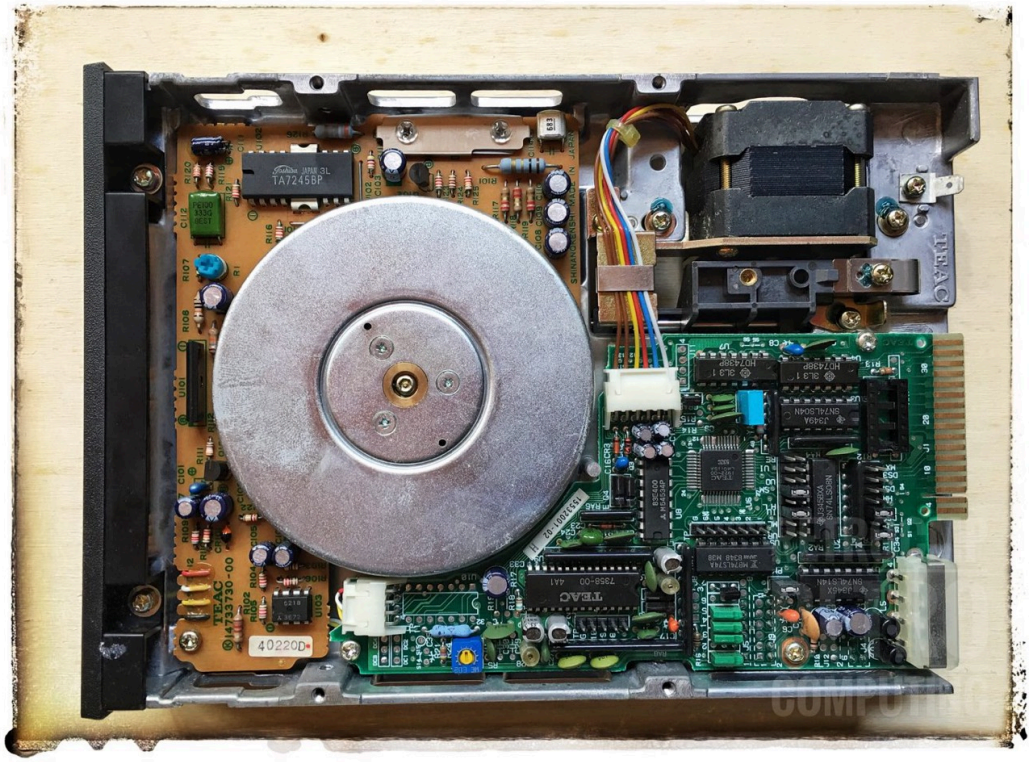

TEAC FD-55E

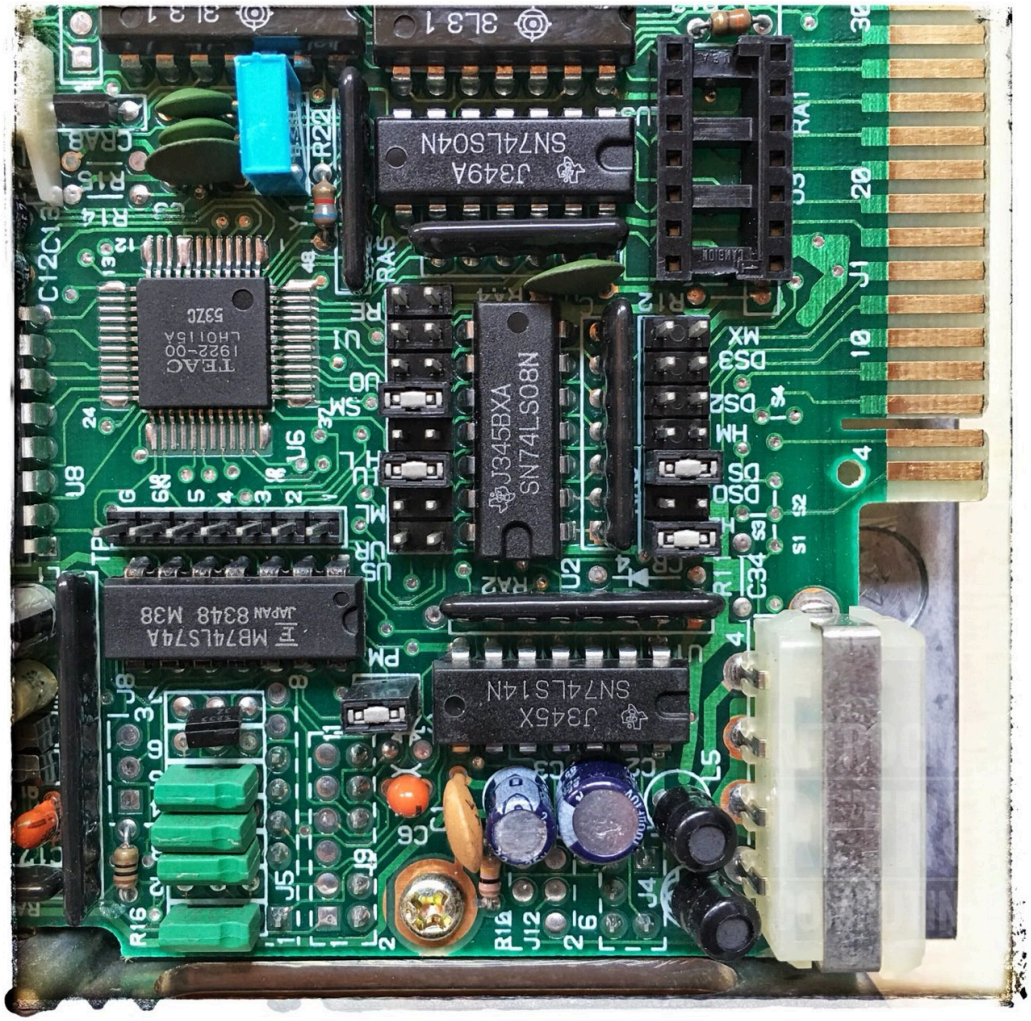

TEAC FD-55E

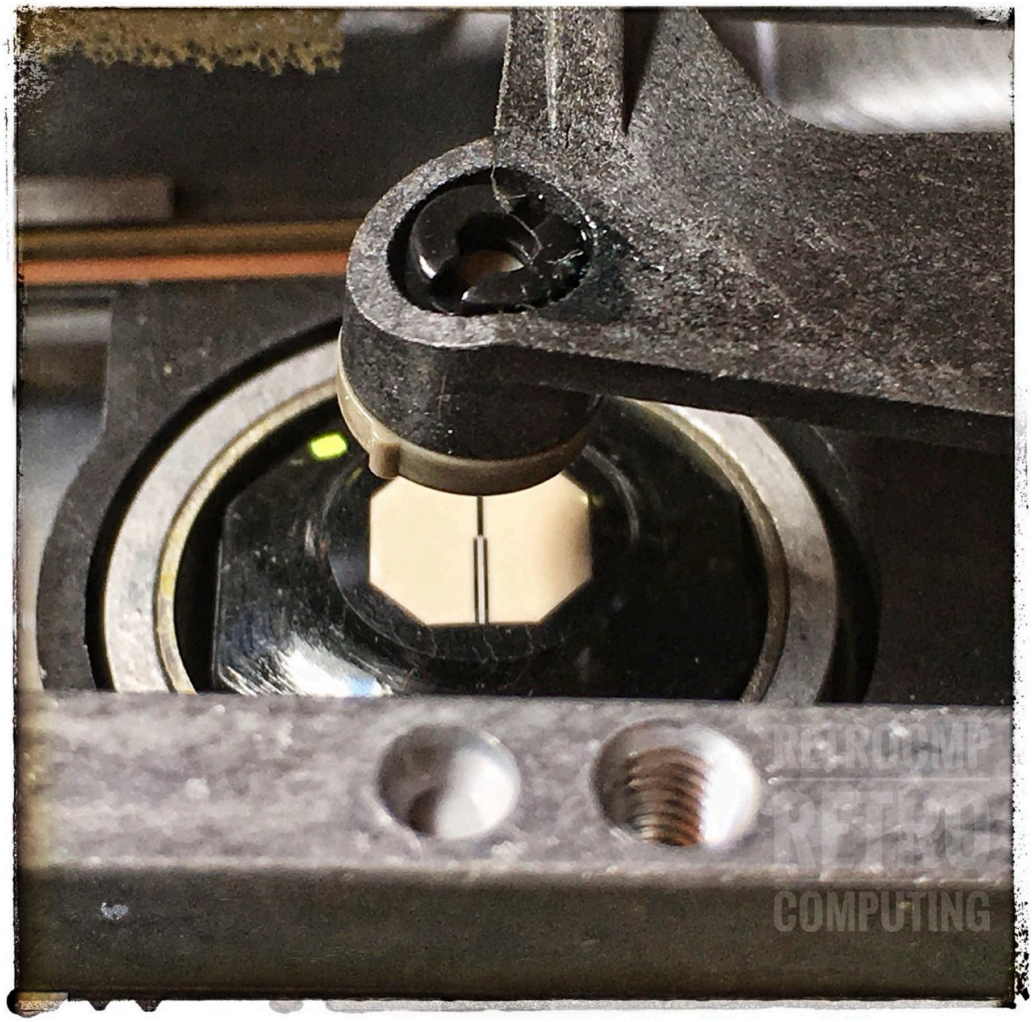

Button type read/write head with tunnel erase


A test with 22Disk, Uniform-PC and SuperCopy

I use the TEAC FD-55E with my IBM PC or XT and it works fine in combination with the program 22Disk. In other words, I use the floppy drive only in conjunction with external CP/M formats. Example:


22Disk:

1. c:> cfmt /DEC2 b:
2. c:> dtoc /DEC2 read.me b:

The first command formats a diskette in drive B: in CP/M format SS, DD, 96 tpi (DEC2) for the DEC Rainbow. The second command copies the file 'read.me' to drive B:.

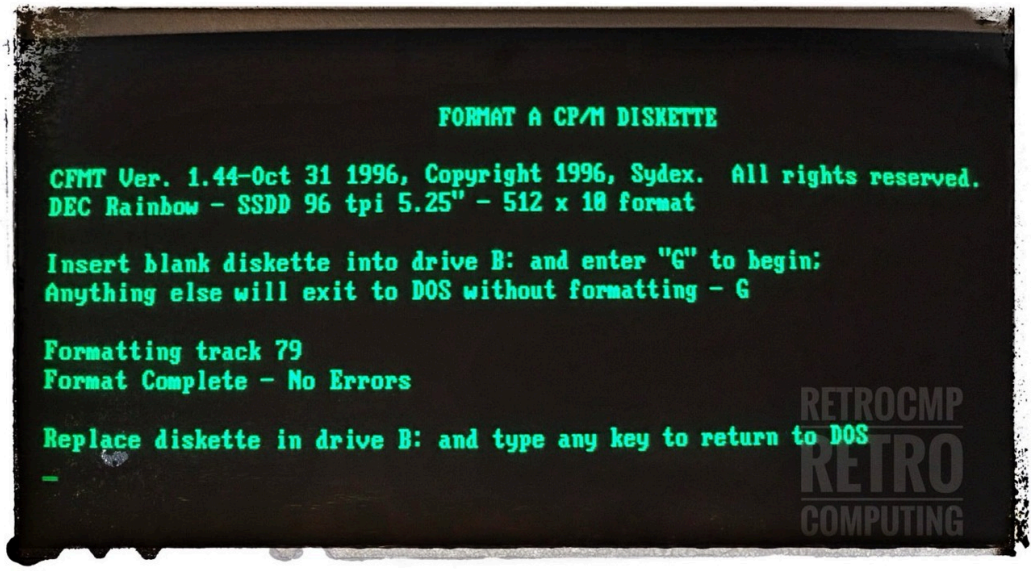

22DISK - Format a CP/M diskette

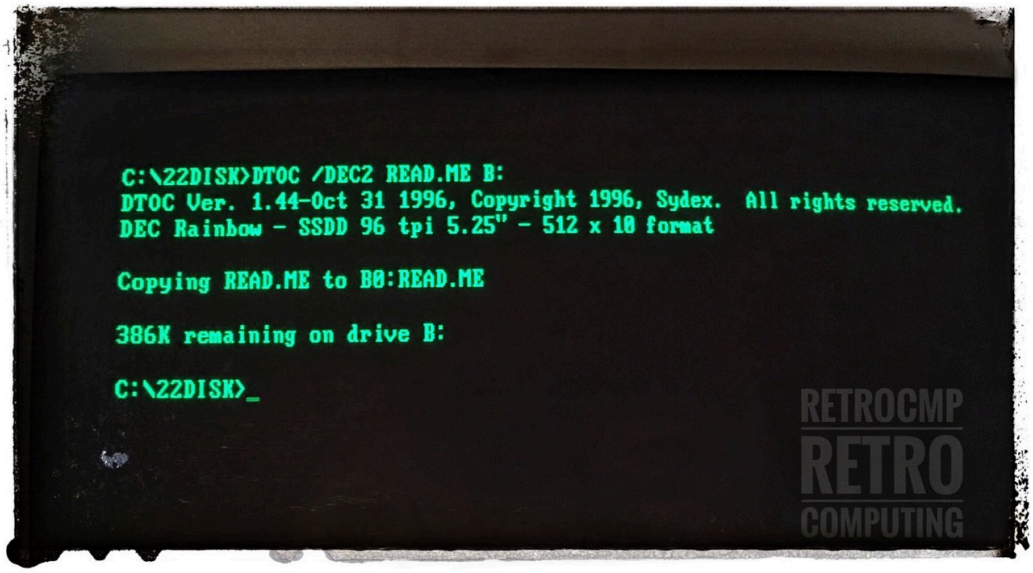

22DISK - Copy a file from DOS to CP/M

With Uniform-PC I selected the CP/M format "DEC Rainbow SSDD:96:CPM". Under PC/MS-DOS the access is quite simply possible with DIR B:. The file 'read.me' is displayed correctly.

SuperCopy works similar to UniForm. First a logical "CP/M" drive must be mounted in DOS via DEVICE=CDRIVE.SYS ... . Then select the appropriate CP/M format with SELECT.EXE. After that a normal file access is possible.

Specifications (S) and brochures (B)

- S: TEAC FD-55 Drive Specification (A, B, E, F, G, GF)
- S: TEAC FD-55 Jumper Settings
- B: TEAC FD-55 Series (A, B, E, F, G, GF)

Home Top Acronyms Literature Links Impressum

Datenschutz

© 2023 Thomas Brase