

MODELING AND SIMULATION OF THE BOILING CRISIS
WITHIN PWR AT CFD SCALE

LUC FAVRE

Improving the Modeling of Wall Boiling for Multiphase CFD Simulations

Paris, December 2022

test

ABSTRACT

To write!

PUBLICATIONS

Some ideas and figures have appeared previously in the following publications:

Put your publications from the thesis here. The packages `multibib` or `bibtopic` etc. can be used to handle multiple different bibliographies in your document.

We have seen that computer programming is an art,
because it applies accumulated knowledge to the world,
because it requires skill and ingenuity, and especially
because it produces objects of beauty.

— knuth:1974 [knuth:1974]

ACKNOWLEDGEMENTS

Put your acknowledgements here.

Many thanks to everybody who already sent me a postcard!

Regarding the typography and other help, many thanks go to Marco Kuhlmann, Philipp Lehman, Lothar Schlesier, Jim Young, Lorenzo Pantieri and Enrico Gregorio¹, Jörg Sommer, Joachim Köstler, Daniel Gottschlag, Denis Aydin, Paride Legovini, Steffen Prochnow, Nicolas Repp, Hinrich Harms, Roland Winkler, and the whole L^AT_EX-community for support, ideas and some great software.

Regarding LyX: The LyX port was initially done by Nicholas Mariette in March 2009 and continued by Ivo Pletikosić in 2011. Thank you very much for your work and the contributions to the original style.

¹ Members of GuIT (Gruppo Italiano Utilizzatori di T_EX e L^AT_EX)

CONTENTS

I	INTRODUCTION	1
II	MODELING AND SIMULATION OF BOILING FLOWS USING CFD	2
1	NEPTUNE_CFD CODE	3
1.1	The NEPTUNE_CFD code and physical modeling	3
1.1.1	Simulation framework	3
1.1.2	Governing equations for turbulent boiling bubbly flows	3
1.1.3	Interfacial transfers closure laws	4
1.1.4	Turbulence modeling	5
1.1.5	Wall boiling model	5
1.1.6	Wall function for dispersed boiling flows	6
2	DEBORA CASES	7
2.1	Boiling freon in a simple tube : DEBORA experiments	7
2.1.1	Description of the experiment	7
2.1.2	Analysis of the Experimental Measurements	8
2.1.3	Comparison with One Dimensional Correlations	8
2.1.4	Experimental Heat Flux Corrections	8
2.1.5	NEPTUNE_CFD simulations of DEBORA cases	8
2.1.6	Investigating the nucleation site density modeling N_{sit}	9
III	DEVELOPMENT OF A NEW WALL HEAT FLUX PARTITIONING MODEL	11
3	INTRODUCTION	12
3.1	First Approaches : Correlations	12
4	EXISTING HEAT FLUX PARTITIONING MODELS	13
4.1	Kurul & Podowski (1990)	13
4.2	Basu (2000)	13
4.2.1	Case 1 : Bubble sliding, $D_d < s$	15
4.2.2	Case 2 : Bubble coalescence without sliding, $D_d \geq s$	16
4.3	Gilman (2017)	17
4.4	Zhou (2020)	18
4.5	Closure Laws for Remaining Parameters	19
4.5.1	Nucleation Site Density : N_{sit}	19
4.5.2	Bubble Departure Frequency f , Growth Time t_g and Wait Time t_w	20
5	BOILING BUBBLE DYNAMICS	21
5.1	Introduction	21
5.1.1	Experimental Insights	21
5.1.2	Existing Approaches	22
5.2	Bubble Force Balance in Vertical Flow Boiling	27
5.2.1	Introduction	27
5.2.2	General Considerations	28
5.2.3	Buoyancy Force	28
5.2.4	Contact Pressure Force	29
5.2.5	Capillary Force	29
5.2.6	Drag and Lift Forces	30
5.2.7	Inertia Force	33
5.2.8	Added Mass force of a growing bubble	34
5.2.9	Added Mass from Duhar <i>et al.</i>	38
5.2.10	Force Balance Summary	38
5.2.11	Liquid Velocity	39
5.3	Departure by Sliding	40
5.3.1	Non-Dimensional Analysis	40
5.3.2	Application to Experimental Data	41

5.3.3	Departure Diameter Prediction	43
5.3.4	Discussion and accounting for parameters uncertainties	45
5.4	Sliding phase	48
5.4.1	Modeling	48
5.4.2	Low Pressure Sliding	48
5.4.3	High Pressure Sliding	50
5.5	Conclusion	50
5.6	Bubble Lift-Off	51
6	CLOSURE LAWS FOR THE HEAT FLUX PARTITIONING MODEL	53
6.1	Single-Phase Heat Transfer Coefficient	53
6.2	Single Bubble Quenching Area	55
6.3	Bubble Growth	55
6.3.1	Analytic derivation of bubble growth in a linear thermal boundary layer	56
6.3.2	Case 1 : δ_b is constant	59
6.3.3	Case 2 : $\delta_b = \sqrt{\eta_l t}$	59
6.3.4	Case 3 : $\delta_b = CR$	59
6.3.5	Comparison with experimental data and DNS	60
6.3.6	Estimation of the thermal boundary layer thickness δ	62
6.3.7	Estimation of t_g against experimental data	62
6.4	Bubble Wait Time	63
6.5	Nucleation Site Density	64
6.6	Considerations on bubble interaction and nucleation sites deactivation	68
6.6.1	Static suppression	68
6.6.2	Static coalescence	68
6.6.3	Sliding coalescence	69
7	ASSEMBLING A NEW HEAT FLUX PARTITIONING MODEL	71
7.1	General description of the model	71
7.1.1	Convective heat fluxes	71
7.1.2	Boiling heat flux	72
7.1.3	Quenching heat flux	72
7.1.4	Needed closure relationships	72
IV	TOWARDS THE INDUSTRIAL GEOMETRY	73
8	PROMOTEUR	74
8.1	Boiling freon in a tube with mixing vanes : DEBORA-Promoteur experiments	74
8.1.1	Description of the experiment	74
8.1.2	Analysis of the Experimental Measurements	74
8.1.3	NEPTUNE_CFD simulations of DEBORA-Promoteur cases	75
8.2	Liquid water flow in a tube with mixing vanes : AGATE-PROMOTEUR experiment	75
8.2.1	Description of the experiment	75
8.2.2	NEPTUNE_CFD simulations of AGATE-Promoteur case	76
V	CONCLUSION	78
VI	APPENDIX	79
A	DETAILS ON THE BUBBLE FORCE BALANCE	80
A.1	Appendix Section Test	81
A.2	Another Appendix Section Test	81
	BIBLIOGRAPHY	83

LIST OF FIGURES

Figure 2.1 NCFD (lines) vs. Exp. (circles) - T_L and T_w - Cases C8G2P26W16Te44.9, Te49.6, Te66.6 and Te70.3 - Simulations using two meshes M1 (coarse) and M2 (fine).	8
Figure 2.2 NCFD (lines) vs. Exp. (circles) - α , d_G and $U_{G,z}$ - Cases C30G2P26W16Te66.6 and Te70.6 - Simulations using two meshes M1 (coarse) and M2 (fine).	9
Figure 2.3 N_{sit} correlations of Lemmert & Chawla (left) and Hibiki & Ishii (right) vs. exp. data from literature. Operation pressures are displayed. $\pm 50\%$ error bars are drawn in black.	9
Figure 2.4 NCFD results for α , T_L and T_w using Lemmert & Chawla and Hibiki & Ishii correlation. Cases 8G2P26W23Te66.6 and Te70.3, 30G2P26W23Te66.6 and 70.6.	10
Figure 4.1 Sketch of the heat transfers zones considered by Basu <i>et al.</i> . (Adapted from [Basu2005])	14
Figure 4.2 Sliding bubble behavior considered by Basu <i>et al.</i> . (Adapted from [Basu2005])	15
Figure 5.1 Visualization of bubble sliding at various pressures.	21
Figure 5.2 Visualization of bubble sliding thermal impact.	22
Figure 5.3 Sketch of a typical bubble lifetime in vertical flow boiling. Left depicts a typical side view of the heater with identification of departure, sliding and lift-off. Right depicts a top view of the heater, exhibiting the area that will undergo transient heat transfer.	23
Figure 5.4 Sketch of the forces applied to the bubble facing an upward flow \overline{U}_L and sliding at velocity \overline{U}_b	28
Figure 5.5 Physical situation considered by Shi <i>et al.</i> [30].	30
Figure 5.6 Drag correction from Shi <i>et al.</i> [30].	31
Figure 5.7 Dominance map regarding departure by sliding. Boundaries plotted for water at 1 bar and $D_d = 0.5\text{mm}$. ($K = 2$)	41
Figure 5.8 Examples of qualitative analysis using the non-dimensional regime map	42
Figure 5.9 Dominance maps for each water data sets from Table 5.4.	44
Figure 5.10 Predicted bubble departure diameters	46
Figure 5.11 Initially assumed, real and reassessed bubble shape for Sugrue cases (picture adapted from [34]).	46
Figure 5.12 Proposed model performance while accounting for contact angle uncertainties	47
Figure 5.13 Bubble sliding velocity predictions on Maity cases	49
Figure 5.14 Bubble sliding length predictions on Kossolapov cases - $P = 20\text{ bar}$	51
Figure 5.15 Bubble sliding length predictions on Kossolapov cases - $P = 40\text{ bar}$	52
Figure 6.1 Predictive capability of wall temperature by single-phase heat transfer correlations. $\pm 3K$ error bars indicated.	53
Figure 6.2 Predictive capability of wall temperature by NCFD law and Gnielinski correlation including corrections. $\pm 3K$ error bars indicated.	54
Figure 6.3 Studied geometry	56
Figure 6.4 Comparison with single bubble growth measurement from MAITY : Boiling water at $\Delta T_{sub} = 0.2^\circ\text{C}$, $\Delta T_w = 5.9^\circ\text{C}$, $U_{liq} = 0.23\text{ m/s}$ and $P = 1\text{ bar}$. Green : $\delta_b = 10^{-5}\text{ m}$ - Red : $\delta_b = \sqrt{\eta_l t}$ - Pink : $\delta_b = 0.1 \times R(t)$ - Blue : PLESSET solution $R(t) = B\sqrt{t}$ with $B = J_{aw}\sqrt{12\eta_l/\pi}$. The liquid boundary layer size has been fixed to $\delta \approx 1\text{ mm}$ according to the experimental measurements.	60
Figure 6.5 Comparison with zero-gravity DNS data from URBANO <i>et al.</i> : Water at $P = 1.01\text{ bar}$, $\Delta T_{sub} = 10^\circ\text{C}$, $\Delta T_w = 2^\circ\text{C}$, $U_{liq} = 0\text{ m/s}$ and $\alpha = 50^\circ$	61
Figure 6.6 Comparison of the model (red) with results from Urbano <i>et al.</i> (gray) at 3 different pairs of $(\Delta T_l, \Delta T_w)$ - Left : R_∞ from the model - Right : R_∞ imposed equal to the DNS	61
Figure 6.7 Comparison of the proposed model and Kommajoyusla model against experimental data from Unal. Black lines represent the $\pm 50\%$ error bars.	63
Figure 6.8 HSV Visualization of bubble density at various pressures adapted from Kossolapov [15] (left to right: 1.01 bar, 3 bar, 19.8 bar, 75.8 bar).	65

Figure 6.9	Sketch of the link between bubble contact angle and wettability / cavity flooding	65
Figure 6.10	Predictions of the chosen models against the experimental data of Table 6.5 with $\pm 50\%$ error bars. The contact angles	67
Figure 7.1	Sketch of the considered HFP	71
Figure 8.1	Picture of the mixing device (left) and its fine meshing (right).	74
Figure 8.2	NCFD (lines) vs. Exp. (circles) - α profiles for two MV positions ($23.5D_h$ in blue, $10D_h$ in orange) - $T_{in} = 65^\circ\text{C}$ (left), $T_{in} = 69^\circ\text{C}$ (middle), $T_{in} = 75^\circ\text{C}$ (right) - Simulations using two meshes M1 (coarse) and M2 (fine) for $T_{in} = 69^\circ\text{C}$	75
Figure 8.3	NCFD vs. Exp. - Top & Middle : Radial velocity and turbulent RMS ($z = 30\text{mm}$ & $z = 440\text{mm}$) - Bottom : Axial velocity and turbulent RMS ($z = 440\text{mm}$).	76

LIST OF TABLES

Table 2.1	Water/R12 scaling (from Garnier <i>et al.</i> [Garnier2001], $D_h = 19.2\text{mm}$ for We)	7
Table 5.1	Summary of the presented correlations	26
Table 5.2	Variables used by Shi <i>et al.</i>	33
Table 5.3	Summary of different force-balance mechanistic approaches.	39
Table 5.4	Bubble departure diameters data sets in vertical flow boiling	43
Table 5.5	Average relative error reached by the models.	48
Table 6.1	Experimental data range of wall temperature measurements from the single-phase part of boiling curves.	53
Table 6.2	Average errors achieved by the considered models on each data sets.	55
Table 6.3	Bubble growth time data in vertical flow boiling	63
Table 6.4	Bubble wait time data in vertical flow boiling	64
Table 6.5	Nucleation Site Density data in flow boiling	66
Table A.1	Autem usu id	81

LISTINGS

Listing A.1	A floating example (<code>listings</code> manual)	82
-------------	--	----

NOMENCLATURE

Acronyms

BC	Boiling Crisis
CHF	Critical Heat Flux
DNS	Direct Numerical Simulations
HFP	Heat Flux Partitioning
PWR	Pressurized Water Reactor
RPE	Rayleigh-Plesset Equation
SMR	Small Modular Reactor

Greek symbols

η	Thermal diffusivity [m ² /s]
γ	Shear rate [s ⁻¹]
λ	Thermal conductivity [W/m/K]
μ	Dynamic viscosity [J.s/m ⁻³]
ν	Kinematic viscosity [m ² /s]
ϕ	Heat flux [J/m ² /s]
ρ	Density [kg/m ³]
σ	Surface tension [J/m ²]
$\theta, d\theta$	Contact angle and half-hysteresis [° or rad]
θ_i	Bubble inclination angle [° or rad]

Latin symbols

C	Force coefficient [-]
D	Bubble diameter [m]
D_h	Hydraulic diameter [m]
E	Kinetic energy [J]
F	Force [N]
G	Mass flux [kg/m ² /s]
g	Gravity acceleration [m ² /s]
h_{LV}	Latent heat of vaporization [J/kg]
K	Bubble growth constant [-]
$L_c = \sqrt{\frac{\sigma}{(\rho_L - \rho_V)g}}$	Capillary length [m]
l_{sl}	Bubble sliding length [m]
R	Bubble radius [m]

R_c	Bubble curvature radius [m]
r_w	Bubble foot radius [m]
T	Temperature [K]
U	Velocity [m/s]
U_τ	Wall friction velocity [m/s]
$U_{rel} = U_L - U_b$	Relative velocity [m/s]
V	Volume [m^3]

Non-dimensional numbers

$\text{Ca} = \frac{\mu_L U_L}{\sigma}$	Capillary number [-]
$\text{Eo} = \frac{(\rho_L - \rho_V) g R^2}{\sigma}$	Eotvos number [-]
$\text{Fr} = \frac{\rho_L U_L^2}{(\rho_L - \rho_V) g R}$	Froude number [-]
$\text{Ja} = \frac{\rho_L c_{P,L} T - T_{sat} }{\rho_V h_{LV}}$	Jakob number [-]
$\text{Pr} = \frac{\nu}{\eta}$	Prandtl number [-]
$\text{Re}_b = \frac{U_{rel} D_b}{\nu_L}$	Bubble Reynolds number [-]
$\text{Re}_{D_h} = \frac{G_L D_h}{\mu_L}$	Liquid bulk Reynolds number [-]
$\text{Sr} = \frac{2\gamma R}{ U_{rel} }$	Non-dimensional shear rate [-]
$y^+ = \frac{y U_\tau}{\nu_L}$	Non-dimensional wall distance [-]

Subscripts

AM	Added-Mass
b	Bubble
D	Drag
d	Departure or Downstream
L	Lift
L	Liquid
lo	Lift-off
sat	Saturation
u	upstream
V	Vapor
w	Wall

ACRONYMS

CFD Computational Fluid Dynamics

CMFD Computational Multi-Fluid Dynamics

NCFD NEPTUNE_CFD

DNS Direct Numerical Simulation

NSD Nucleation Site Density

NOMENCLATURE

$N_{sit,0}$ Nucleation Site Density computed by correlation [m⁻²]

Part I
INTRODUCTION

Part II

MODELING AND SIMULATION OF BOILING FLOWS USING CFD

NEPTUNE_CFD CODE

1.1 THE NEPTUNE_CFD CODE AND PHYSICAL MODELING

1.1.1 *Simulation framework*

NEPTUNE_CFD is an eulerian multiphase CFD solver co-developed by EDF, CEA, IRSN and Framatome mostly for nuclear reactor applications. The code consists of a local three-dimensional modeling based on a two-fluid one pressure approach combined with mass, momentum and energy conservation equations for each phase[**Guelfi2007**].

The constitutive equations are solved using a pressure correction, and is based on a finite-volume discretization along with a collocated arrangement of the variables. Moreover, NEPTUNE_CFD allows the use of all type of meshes (hexahedra, tetrahedra, pyramids, etc.), even non-conforming ones, thanks to its face-based data structure. Finally, the code is well-suited for parallel computing, widening its computing capacity to very large meshes.

1.1.2 *Governing equations for turbulent boiling bubbly flows*

To simulate two-phase dispersed boiling flows, NEPTUNE_CFD solves the ensemble-averaged equations of mass conservation, momentum balance and energy conservation for each phase (total of 6 equations) :

Mass conservation :

$$\frac{\partial \alpha_k \rho_k}{\partial t} + \bar{\nabla} \cdot (\alpha_k \rho_k \bar{U}_k) = \Gamma_k \quad (1.1)$$

Where α_k , ρ_k , \bar{U}_k are the time fraction, average density and velocity of phase k ; $\Gamma_k = \Gamma_{k,i} + \Gamma_{k,w}$ the interfacial mass transfer term per unit of volume and time splitted between bulk and wall contribution. Subscripts $k = L$ or G denotes the liquid or gas phase, i the interfacial quantities and w the wall contribution.

Momentum balance :

$$\frac{\partial \alpha_k \rho_k \bar{U}_k}{\partial t} + \bar{\nabla} \cdot (\alpha_k \rho_k \bar{U}_k \otimes \bar{U}_k) = -\alpha_k \bar{\nabla} (P) + \bar{F}_{k,i} + \Gamma_k \bar{U}_{k,i} + \alpha_k \rho_k \bar{g} + \bar{\nabla} \cdot (\alpha_k (\bar{\tau}_{k,m} + \bar{\tau}_{k,T})) \quad (1.2)$$

Where P is the pressure, \bar{g} the gravity, $\bar{F}_{k,i}$ the interfacial forces accounting for momentum transfer between phases per unit of volume and time, $\bar{U}_{k,i}$ the interfacial velocity, $\bar{\tau}_{k,m}$ and $\bar{\tau}_{k,T}$ respectively the viscous and turbulent (or Reynolds) stress tensor. Subscript m and T respectively denote the molecular (or laminar) and turbulent terms.

Energy conservation :

$$\begin{aligned} \frac{\partial \alpha_k \rho_k H_k}{\partial t} + \bar{\nabla} \cdot (\alpha_k \rho_k H_k \bar{U}_k) &= \frac{\partial \alpha_k P}{\partial t} + \Gamma_k H_{k,i} + \bar{F}_{k,i} \cdot \bar{U}_k + Q_{k,I} + \bar{\nabla} \cdot (\alpha_k (\bar{\tau}_k + \bar{\tau}_{k,T}) \cdot \bar{U}_k) \\ &\quad + \bar{\nabla} \cdot (\alpha_k (-(\lambda_{k,m} + \lambda_{k,T}) \bar{\nabla} (T_k))) + \alpha_k \rho_k \bar{g} \cdot \bar{U}_k + Q_{k,w} \end{aligned} \quad (1.3)$$

Where $H_k = e_k + \frac{U_k^2}{2} + \frac{P}{\rho_k} = h_k + \frac{U_k^2}{2}$ is the total enthalpy of phase k , $H_{k,i}$ the interfacial-averaged enthalpy, $Q_{k,i}$ the interfacial heat flux per unit of volume and time, $\lambda_{k,m}$ and $\lambda_{k,T}$ respectively being the laminar and turbulent thermal conductivity, T_k the temperature, $Q_{k,w}$ the heat flux from the wall to phase k per unit of volume and time.

However, this ensemble-average approach requires a given number of closure laws since this operation removes most of the information about smaller scales physics such as interfacial exchanges between phases

or wall-fluid interaction. Terms for which this modeling effort is needed are colored in orange in equations 1.1, 1.2 and 1.3. The chosen expressions for those terms are detailed in subsections 1.1.3, 1.1.4 and 1.1.5.

1.1.3 Interfacial transfers closure laws

The interfacial transfers of mass, momentum and energy are respectively noted in equations 1.1, 1.2 and 1.3 : Γ_k , $\overline{F}_{k,i}$ and $Q_{k,i}$.

Heat and mass transfers :

The mass transfer term, can be written as : $\Gamma_{L,i} + \Gamma_{G,i} = 0$, $\Gamma_{L,w} + \Gamma_{G,w} = 0$ with $\Gamma_{G,w} \geq 0$ in the case of boiling flows. This finally gives $\Gamma_L = -\Gamma_G$.

The interfacial heat flux $Q_{k,i}$ can be rewritten in terms of interfacial area concentration a_i : $Q_{k,i} = q''_{k,i} a_i$. Neglecting the mechanical contribution compared to the thermal terms, the energy jump condition can then be expressed as :

$$\sum_{k=L,G} \left(\Gamma_{k,i} h_{k,i} + q''_{k,i} a_i \right) = 0 \quad (1.4)$$

The estimation of $h_{k,i}$ is not straightforward since it can either be supposed to be the saturation enthalpy of phase k at the system pressure (H1) or $h_{k,i}$ can be identified to the phase-averaged enthalpy (H2). In NEPTUNE_CFD, the assumption H2 is chosen, thus giving the bulk condensation rate :

$$\Gamma_{L,i} = \frac{a_i \left(q''_{L,i} + q''_{G,i} \right)}{h_{G,sat} - h_{L,sat}} \quad (1.5)$$

The interfacial heat flux densities $q''_{k,i}$ and interfacial area concentration a_i are expressed as $q''_{k,i} = C_{k,i} (T_{sat}(P) - T_k)$ and $a_i = 6\alpha_G/d_G$, d_G being the gas phase Sauter mean bubble diameter. The interfacial area is computed using the transport equation of RUYER & SEILER [Ruyer2009].

For subcooled liquid, the following heat transfer coefficient is used [Manon2000]:

$$C_{L,i} = \frac{Nu_L \lambda_L}{d_G} \text{ and } Nu_L = 2 + 0.6 Re^{1/2} Pr_L^{1/3} \quad (1.6)$$

Where Re is the bubble Reynolds number $Re = ||\overline{U}_G - \overline{U}_L|| d_G / \nu_L$ and Pr_L the liquid Prandtl number $Pr_L = \nu_L / \eta_L$ with ν_L and η_L respectively being the liquid kinematic viscosity and thermal diffusivity. On the other hand, if the liquid is overheated, the maximum of three heat transfer coefficients accounting for different heat tranfer mechanisms is taken [Berne1983]:

$$C_{L,i} = \max (C_{L,i,1}; C_{L,i,2}; C_{L,i,3}) \quad (1.7)$$

With $C_{L,i,n} = \lambda_L Nu_{L,n} / d_G$ and :

$$Nu_1 = \sqrt{\frac{4}{\pi} Pe} ; Nu_2 = 2 ; Nu_3 = \frac{12}{\pi} Ja \quad (1.8)$$

where $Pe = ||\overline{U}_G - \overline{U}_L|| d_G / \eta_L$ is the Peclet number and $Ja = \rho_L c_{p,L} |T_{sat} - T_L| / (\rho_g h_{lg})$ the Jakob number, with h_{lg} the latent heat of vaporization. Those three Nusselt numbers respectively correspond to convection heat transfer, stationnary conduction and transient conduction.

For the gas phase, a simple law that ensures that the vapor temperature remains close to the saturation temperature is used (which is expected for small bubbles, e. g. in a PWR) :

$$C_{G,i} a_i = \frac{\alpha_G \rho_v c_{p,G}}{t_c} \quad (1.9)$$

where $c_{p,G}$ is the gas heat capacity at constant pressure, and t_c a characteristic (relaxation) time given by the user (default value being $t_c = 0.01s$) .

Interfacial forces :

The interfacial momentum transfer (excluding transfer associated to transfer of mass Γ_k) is assumed to be composed of 4 different forces being the, drag D , the added mass AM , the lift L and the turbulent dispersion TD :

$$\overline{F}_{k,i} = \overline{F}_{k,D} + \overline{F}_{k,AM} + \overline{F}_{k,L} + \overline{F}_{k,TD} \quad (1.10)$$

The turbulent dispersion force $\overline{F_{k,TD}}$ originates from the averaging operation conducted on the three other forces' expressions, detailed in equations 1.11, 1.12, 1.13 and 1.14.

$$\overline{F_{G,D}} = -\overline{F_{L,D}} = -\frac{1}{8}a_i\rho_L C_D \left| \left| \overline{U_G} - \overline{U_L} \right| \right| (\overline{U_G} - \overline{U_L}) \quad (1.11)$$

$$\begin{aligned} \overline{F_{G,AM}} = -\overline{F_{L,AM}} &= -C_{AM} \frac{1+2\alpha_G}{1-\alpha_G} \alpha_G \rho_L \\ &\times \left[\left(\frac{\partial \overline{U_G}}{\partial t} + \bar{\nabla}(\overline{U_G}) \cdot \overline{U_G} \right) - \left(\frac{\partial \overline{U_L}}{\partial t} + \bar{\nabla}(\overline{U_L}) \cdot \overline{U_L} \right) \right] \end{aligned} \quad (1.12)$$

$$\overline{F_{G,L}} = -\overline{F_{L,L}} = -C_L \alpha_G \rho_L (\overline{U_G} - \overline{U_L}) \wedge (\bar{\nabla} \wedge \overline{U_L}) \quad (1.13)$$

$$\overline{F_{G,TD}} = -\overline{F_{L,TD}} = -\frac{2}{3}\alpha_L \alpha_G C_{TD} \bar{\nabla}(\alpha_G) \quad (1.14)$$

with C_D , C_{AM} , C_L and C_{TD} the associated forces coefficients, respectively taken from ISHII [Ishii1967], ZUBER [Zuber1964], TOMIYAMA [Tomiyama2002] and the Generalized Turbulent Dispersion model (GTD) from LAVIEVILLE *et al.* [Lavieville2017].

1.1.4 Turbulence modeling

For bubbly flow simulations, only liquid phase turbulence is taken into account. The prescribed model is the Reynolds Stress Model (RSM) $R_{ij} - \varepsilon SSG$ from SPEZIALE, SARKAR and GATSKI [Speziale1991] adapted to two-phase boiling flows by MIMOUNI *et al.* [Mimouni2011].

1.1.5 Wall boiling model

The modeling of the heterogeneous boiling phenomenon at the wall is based on a Heat Flux Partitioning (HFP) model, inspired by KURUL & PODOWSKI original work [Kurul1990] who divided the wall heat flux density ϕ_w in three terms :

- A single phase convective heat flux $\phi_{c,L}$ heating the liquid through the fraction of the wall area unaffected by the vapor bubbles
- A vaporization heat flux ϕ_e which accounts for the generation of vapor through heterogeneous nucleation
- A quenching heat flux ϕ_q to represent the thermal impact of bubbles departing from the wall and being replaced by cool liquid

A fourth flux is added to this HFP in NEPTUNE_CFD, following MIMOUNI *et al.* [Mimouni2016] who consider a convective heat flux heating the vapour $\phi_{c,G}$ when the wall area is covered by a dense accumulation of bubbles.

The model thus gives Equation 7.1 :

$$\phi_w = \phi_{c,L} + \phi_e + \phi_q + \phi_{c,G} \quad (1.15)$$

The convective heat fluxes are expressed as $\phi_{c,k} = A_k h_{k,log} (T_w - T_k)$ with $h_{k,log} = \rho_k c_{p,k} u^* / T_L^+$; where A_k the fraction of the wall area facing phase k , T_w the wall temperature and $h_{k,log}$ the wall logarithmic convective heat transfer coefficient to phase k based on the wall functions for friction velocity u^* and non-dimensional liquid temperature T_L^+ described in 1.1.6.

The vaporization heat flux is computed following $\phi_e = N_{sit} f \rho_G h_{lg} \pi d_d^2 / 6$ with :

- N_{sit} the nucleation site density modeled as [Lemmert1977] : $N_{sit} = [210 (T_w - T_{sat})]^{1.8}$
- f the bubble detachment frequency expressed as [Cole1960] : $f = \sqrt{\frac{4}{3} \frac{g |\rho_v - \rho_l|}{\rho_l d_d}}$
- d_d the bubble detachment diameter given by Unal correlation [Unal1976] corrected by Borée *et al.* [ref] (Equation 1.16)

$$d_d = 2.42 \times 10^{-5} P^{0.709} \frac{a}{\sqrt{b\varphi}} \text{ with } a = \frac{(T_w - T_{sat}) \lambda_w}{2\rho_G h_{lg} \sqrt{\pi \eta_w}} \text{ and } b = \begin{cases} \frac{T_{sat} - T_L}{2(1 - \rho_G/\rho_L)}, & \text{if } St \leq 0.0065 \\ \frac{1}{2(1 - \rho_G/\rho_L)} \frac{\phi_{c,L} + \phi_e + \phi_q}{0.0065 \rho_L c_{p,L} \|\overline{U}_L\|}, & \text{if } St > 0.0065 \end{cases} \quad (1.16)$$

where λ_w and η_w are the wall thermal conductivity and diffusivity, $St = \frac{\phi_{c,L} + \phi_e + \phi_q}{\rho_L c_{p,L} \|\overline{U}_L\| (T_{sat} - T_L)}$ is the Stanton number and $\varphi = \max \left(1; \left(\frac{\|\overline{U}_L\|}{U_0} \right)^{0.47} \right)$ with $U_0 = 0.61 \text{ m/s}$

Finally, the quenching heat flux follows the approach of DEL VALLE & KENNING [DelValle1985] supposing that it follows a semi-infinite transient conduction regime : $\phi_q = A_G t_q f \frac{2\lambda_L (T_w - T_L)}{\sqrt{\pi \eta_L t_q}}$ where t_q is the quenching time, supposed to be equal to $1/f$.

1.1.6 Wall function for dispersed boiling flows

In boiling flows, the formation of bubbles at the wall may disturb the liquid velocity profile in the boundary layer. To take this phenomena into account, MIMOUNI *et al.* [Mimouni2016] proposed a wall function for boiling flows which tends to the single-phase formulation when $\alpha_G \rightarrow 0$ and depends on the bubble diameter and density at the wall :

$$u^+ = \frac{1}{\kappa} \ln(y^+) + B - \Delta u^+ \text{ with } \Delta u^+ = \begin{cases} 0 & \text{if } k_r^+ \leq 11.3 \\ \frac{1}{\kappa} \ln(1 + C_{kr} k_r^+) & \text{if } k_r^+ > 11.3 \end{cases} \quad (1.17)$$

where $\kappa=0.41$ is the Von Karman constant, $B = 5.3$ the standard single-phase logarithmic law constant. Δu^+ represents the offset of u^+ due to the wall roughness induced by the presence of bubble. We have $C_{kr} = 0.5$ and $k_r = \frac{k_r \sqrt{u^* u_T}}{\nu_L}$ the "roughness Reynolds number" with $u_T = C_\mu^{1/4} \sqrt{k_L}$ defined from the $k - \varepsilon$ constant $C_\mu = 0.09$ and k_L the liquid turbulent kinetic energy. Finally, $k_r = \alpha_G d_G$.

The non-dimensional wall liquid temperature T_L^+ is modeled according to LEDUC [Leduc1995]:

$$T_L^+ = \begin{cases} Pr_L y^+, & \text{if } y^+ \leq 13.2 \\ 8.67 Pr_{L,T} \left(\frac{Pr_L}{Pr_{L,T}} - 1 \right) \left(\frac{Pr_{L,T}}{Pr_L} \right)^{0.25} + \frac{Pr_{L,T}}{\kappa} \ln(Ey^+) & \text{if } y^+ > 13.2 \end{cases} \quad (1.18)$$

With $Pr_{L,T} = 0.9$ the turbulent liquid Prandtl number, and $E = 7.76$ a constant for smooth walls.

2

DEBORA CASES

2.1 BOILING FREON IN A SIMPLE TUBE : DEBORA EXPERIMENTS

In this section, we simulate upward boiling flows of R12 in a vertical tube and compare the NEPTUNE_CFD (NCFD) results with experimental measurements conducted by CEA & EDF on the DEBORA test facility.

2.1.1 *Description of the experiment*

In the end of 1990's, CEA and EDF built a test facility called DEBORA which goal was to conduct series of experiments and measurements to establish a database for boiling flows of freon R12. The choice of freon is justified because of its use as a simulating fluid for water in PWR conditions (very close phase density ratio, Weber number We, Boiling number Bo and thermodynamic flow quality x_{eq}). Table 2.1 sums up the flow conditions scaling between R12 and water.

Table 2.1: Water/R12 scaling (from Garnier *et al.* [Garnier2001], $D_h = 19.2\text{mm}$ for We)

Fluid	Water	Freon R12
Pressure P (bar)	100 - 180	14 - 30
Mass velocity G ($\text{kg}/\text{m}^2/\text{s}$)	1000 - 5000	1000 - 5000
Wall heat flux ϕ_w (MW/m^2)	0.5 - 6	0.05 - 0.65
Thermodynamic flow quality x_{eq} (-)	(-0.4) - (+0.4)	(-0.4) - (+0.4)
Density ratio ρ_G / ρ_L (-)	0.08 - 0.25	0.07 - 0.22
Weber number We (-)	2374 - 368 579	3319 - 438 966
Boiling number Bo (-)	$3.67 \times 10^{-5} - 2.39 \times 10^{-3}$	$2.65 \times 10^{-5} - 1.74 \times 10^{-3}$

The DEBORA experiment consists of an upward subcooled boiling flow of R12 in a 4m length pipe uniformly heated over 3.5m with an hydraulic diameter $D_h = 19.2\text{mm}$. Measurements of void fraction (α), interfacial velocity (*i.e.* axial gas velocity $U_{G,z}$), bubble diameter (d_G), liquid temperature (T_L) and wall temperature (T_w) at the end of the heating length were conducted through different series of tests. Experimental apparatus is detailed in Garnier *et al.* [Garnier2001] and Manon[Manon2000].

Different test campaigns were conducted on this experimental setup, in particular :

- Campaign 2900 : measurements of α , $U_{g,z}$ and d_G using one optical probe
- Campaign 3000 : measurements of α , $U_{g,z}$ and d_G using two optical probes
- Campaign 800 : measurements of T_L and T_w using thermocouples

Each experimental case is named following this nomenclature : CccGgPppWwwTtt with cc being the campaign number, g the inlet mass velocity (G), pp the outlet pressure (P), ww the total heat power applied (W) and tt the inlet temperature (T_{in}). For instance, C8G3P26W23Te69 refers to the case from the campaign 800 with $G \approx 3000 \text{ kg/m}^2/\text{s}$, $P \approx 26 \text{ bar}$, $W \approx 23 \text{ kW}$ and $T_{in} \approx 69^\circ\text{C}$.

2.1.2 Analysis of the Experimental Measurements

2.1.3 Comparison with One Dimensional Correlations

2.1.4 Experimental Heat Flux Corrections

2.1.5 NEPTUNE_CFD simulations of DEBORA cases

In this work, we present the simulations of the following cases :

- C8G2P26W16Te44.9 and C8G2P26W16Te49.6 (single-phase flow)
- C8G2P26W16Te66.6 and C8G2P26W16Te70.3 (two-phase flow)
- C30G2P26W16Te66.6 and C30G2P26W16Te70.6 (two-phase flow)

The pressure of 26 bar is chosen to match the pressure of the mixing vanes cases (DEBORA-Promoteur, Section 8.1). Mesh sensitivity is performed over two meshes : a large mesh (M1) with 460 356 cells = 338 radial \times 1362 axial cells and a fine mesh (M2) with 3 157 952 cells = 1568 radial \times 2014 axial cells. On Figure 2.1, we present the results regarding liquid temperature at the outlet and wall temperature. The liquid temperature profile seems to be correctly reproduced by the simulations, though we see a slight overestimation close to the wall. Looking closer at boiling cases shows a difference of $\approx 0.5^\circ\text{C}$, which is close to the uncertainty of the measurements [Garnier2001]. Concerning the wall temperature, it appears that it is underestimated before the **Onset of Nucleate Boiling** (ONB) ($T_w < T_{sat}$) and overestimated after the ONB ($\approx +5^\circ\text{C}$). Post-ONB wall temperature is characterized by a stabilization of its value above the saturation temperature (here $T_{w,ONB} - T_{sat} \approx 2^\circ\text{C}$).

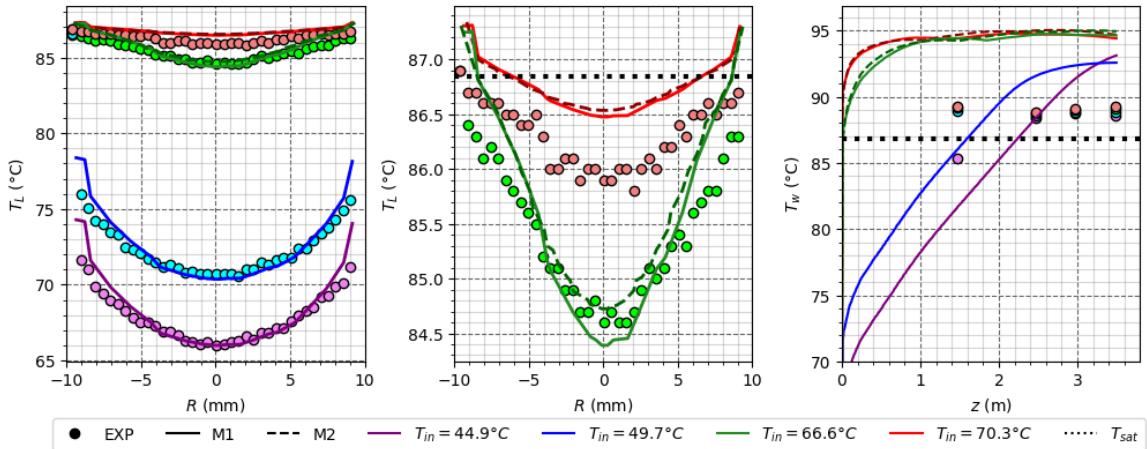


Figure 2.1: NCFD (lines) vs. Exp. (circles) - T_L and T_w - Cases C8G2P26W16Te44.9, Te49.6, Te66.6 and Te70.3 - Simulations using two meshes M1 (coarse) and M2 (fine).

On Figure 2.2, we compare the results of the simulations to the experiments regarding void fraction, bubble Sauter diameter and axial gas velocity. Void fraction profiles are quite correctly reproduced, though we observe a 10% higher peak at the wall for $T_{in} = 66.6^\circ\text{C}$. The order of magnitude of bubble diameter is correct ($\sim 0.1\text{mm}$) and NEPTUNE_CFD manages to detect coalescence (increase of bubble diameter when leaving the wall) and bulk condensation (decrease of bubble diameter when reaching the core of the flow), which is in qualitative agreement with the experiments. Quantitatively speaking, bubble diameter is globally underestimated. Finally, gas velocity profile is reasonably reproduced for $T_{in} = 66.6^\circ\text{C}$, but not for $T_{in} = 70.6^\circ\text{C}$. The latter experimental profile is flatter, which could be explained by a change of flow regime since uncondensed vapor is detected in the bulk.

Finally, the simulations reasonably agree with the experiments. The strongest discrepancies being mostly the wall temperature and bubble diameter. Potential ways of improving those results are investigated in next sub-section.

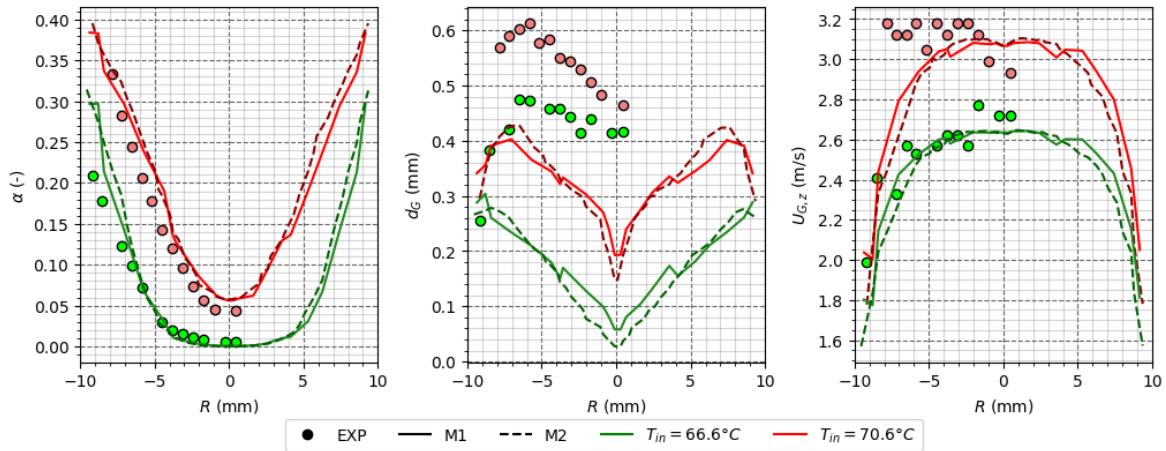


Figure 2.2: NCFD (lines) vs. Exp. (circles) - α , d_G and $U_{G,z}$ - Cases C30G2P26W16Te66.6 and Te70.6 - Simulations using two meshes M1 (coarse) and M2 (fine).

2.1.6 Investigating the nucleation site density modeling N_{sit}

In NEPTUNE_CFD, wall temperature is computed through the Heat Flux Partitioning model, which role is to find the appropriate T_w which balances Equation 7.1. However, some laws used to express parameters such as N_{sit} , f , or d_d are quite old and simple. For instance, the Lemmert & Chawla [Lemmert1977] expression of N_{sit} only depends on the wall superheat (Sub-section 1.1.5).

A comparison of the Lemmert & Chawla law [Lemmert1977] with the Hibiki & Ishii [Hibiki2003] law for N_{sit} against 4 data sets from the literature is presentend on Figure 2.3. The Hibiki & Ishii correlation depends simultaneously on wall superheat, pressure and contact angle. Experimental measurements of Borishanskii *et al.* [Borishanskii1961], Richenderfer *et al.* [Richenderfer2018], Kossolapov *et al.* [Kossolapov2020] and Zhou *et al.* [Zhou2020] are used to assess the two nucleation site density correlations.

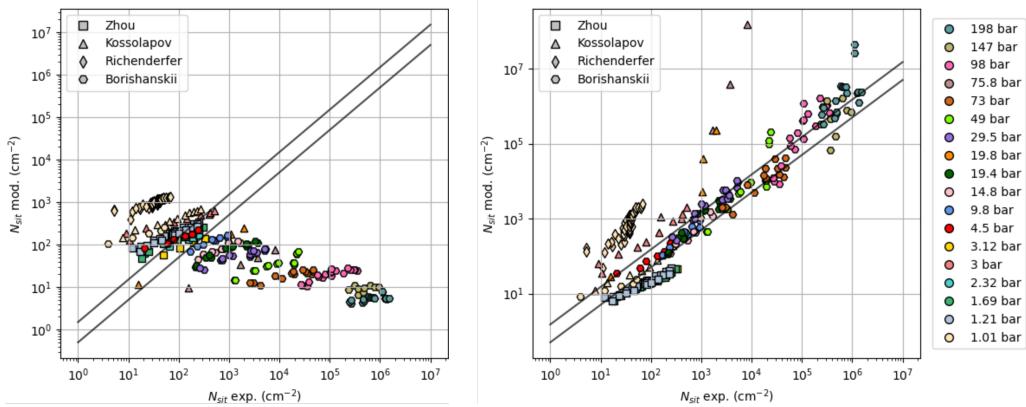


Figure 2.3: N_{sit} correlations of Lemmert & Chawla (left) and Hibiki & Ishii (right) vs. exp. data from literature. Operation pressures are displayed. $\pm 50\%$ error bars are drawn in black.

Figure 2.3 clearly shows that the Lemmert & Chawla law lack of pressure dependence fails to reproduce high pressure measurements contrary to the Hibiki & Ishii one. Even though Hibiki & Ishii correlation shows significant discrepancies with measurements of Kossolapov *et al.* and Richenderfer *et al.*, its prediction capability is greater in average than Lemmert & Chawla correlation.

To assess the influence of nucleation site density law on NEPTUNE_CFD computations, we compare results obtained with both correlations on Figure 2.4, which shows a remarkable impact of the modification of N_{sit} correlation. Using Hibiki & Ishii correlation reduces the error on T_w by approximately 2°C while α and T_L remain unchanged. This implies that the same heat flux partitioning is found with the two models, but that the pressure dependence of Hibiki & Ishii law helped to balance Equation 7.1 using a lower T_w , thus closer to experimental measurements.

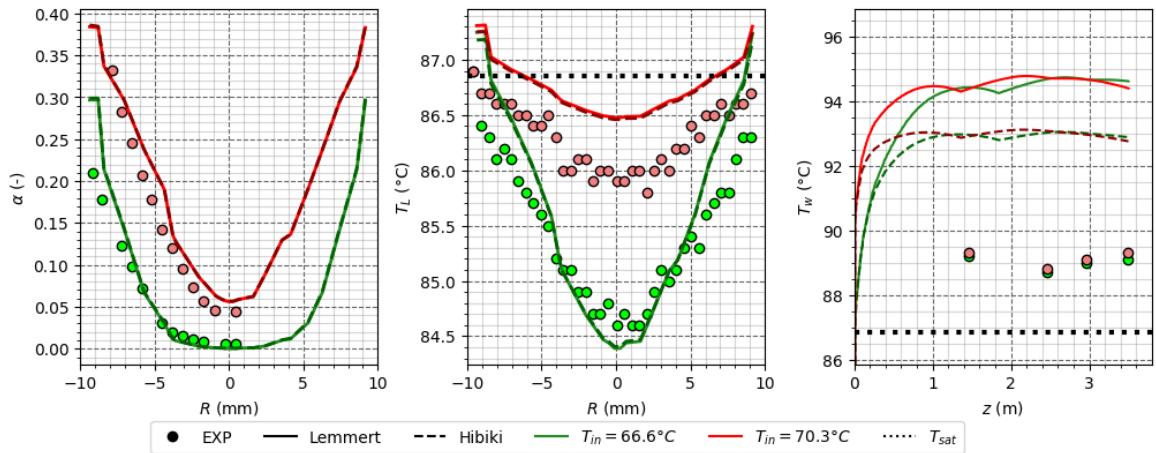


Figure 2.4: NCFD results for α , T_L and T_w using Lemmert & Chawla and Hibiki & Ishii correlation. Cases 8G2P26W23Te66.6 and Te70.3, 30G2P26W23Te66.6 and 70.6.

Such a result indicates that the HFP model could be improved through a systematic analysis of each parameter's impact and modeling (bubble departure diameter, detachment frequency, etc.). Assembling a more recent and consistent model could provide better results regarding wall temperature prediction. Models such as the one developed by Kommajosyula[Kommajosyula2020] could be interesting to apply for high-pressure flows.

Now that simple tube boiling flow has been assessed through the presented results, next section will focus on the simulation of boiling flow in a tube equipped with a mixing device.

Part III

DEVELOPMENT OF A NEW WALL HEAT FLUX PARTITIONING MODEL

3

INTRODUCTION

3.1 FIRST APPROACHES : CORRELATIONS

4

EXISTING HEAT FLUX PARTITIONING MODELS

4.1 KURUL & PODOWSKI (1990)

In their original work published in 1990, Kurul & Podowski [**kurul_1990**] proposed a complete closure for the wall heat flux partitioning. They considered the applied heat flux to be divided between three mechanisms:

- A liquid single-phase heat flux $\phi_{c,L}$;
- A boiling heat flux ϕ_e ;
- A quenching heat flux ϕ_q induced by bubbles leaving the surface.

The total wall heat flux being :

$$\phi_w = \phi_{c,L} + \phi_e + \phi_q \quad (4.1)$$

The convective heat flux is expressed as :

$$\phi_{c,l} = A_{c,L} \rho_L c_{p,L} U_{L,\delta} \text{St}_{L,\delta} (T_w - T_{L,\delta}) \quad (4.2)$$

with δ a location in the buffer layer.

Assuming bubbles are spherical and leave the surface at diameter D_{lo} , they write:

$$\phi_e = \frac{1}{6} \pi D_{lo}^3 \rho_V h_{LV} f N_{sit} \quad (4.3)$$

$$(4.4)$$

The quenching heat flux occurring over the wait time t_w between two nucleated bubbles is computed as:

$$\phi_q = t_w f A_q \frac{2\lambda_L (T_w - T_{L,\delta})}{\sqrt{\pi \eta_L t_w}} \quad (4.5)$$

This expression corresponds to the average heat flux for semi-infinite conduction over a time t_w , as expressed by Del Valle and Kenning [**DeValle**].

They also estimate the portion of the surface affected by the bubbles as:

$$A_q = \min(1 ; F_A \pi R_{lo}^2 N_{sit}) = 1 - A_{c,L} \quad (4.6)$$

where $F_A = 4$ accounts for the bubble influence area when leaving the surface.

Needed closure relationships : N_{sit} , f , t_w , D_{lo}

4.2 BASU (2000)

In 2005, Basu *et al.* [**Basu2005**, **Basu2005a**] proposed a new HFP model together with a series of experiments to further study the different needed closure relationships. This model was meant to account for finer descriptions of the multiple phenomena at stake in subcooled flow boiling. In particular, they account for bubble sliding and merging and thus distinguish bubble departure diameter D_d (leaving the nucleation site) and lift-off diameter D_{lo} (leaving the wall).

Their approach consist of separating the boiling flow in three regions (Figure 4.1):

- Pre-ONB zone, where only liquid forced convection occurs, yielding:

$$\phi_w = h_{c,L} (T_w - T_L) \quad (4.7)$$

- Zone between the ONB and the OSV, prior to observing a net amount of vapor with bubble lifting off the surface. The heat flux is then still totally transferred to the liquid, but the equivalent convective heat transfer coefficient is supposed enhanced by 30% due to the presence of bubbles on the wall:

$$\phi_w = \overline{h_{c,L}} (T_w - T_L) \approx 1.3 h_{c,L} (T_w - T_L) \quad (4.8)$$

Basu *et al.* define the ONB as:

$$T_{w,ONB} = T_{sat} + \frac{4\sigma T_{sat}}{D_c \rho_V h_{LV}} \quad (4.9)$$

$$D_c = \sqrt{\frac{8\sigma T_{sat} \lambda_L}{\rho_V h_{LV} \phi_w}} (1 - \exp(-\theta^3 - 0.5\theta)) \quad (4.10)$$

- Post-OSV zone, where bubbles now leave the surface towards the bulk flow. This is where the other parts of the HFP appear *i.e.* the boiling and quenching fluxes. The beginning of OSV is defined by Basu *et al.* as:

$$T_{L,OSV} = T_{sat} - 0.7 \exp \left(-0.065 \frac{D_d h_{c,L}}{\lambda_L} \right) \frac{\phi_w}{h_{c,L}} \quad (4.11)$$

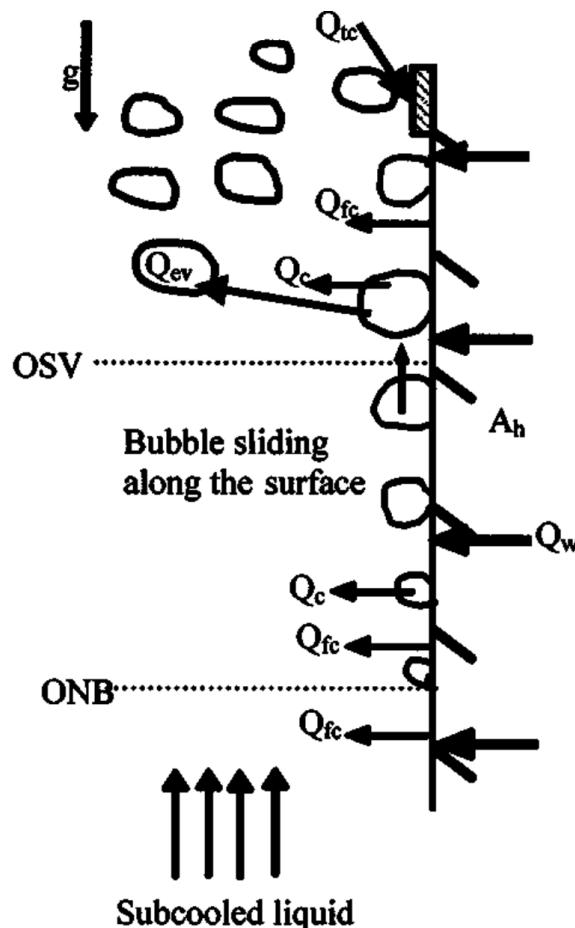


Figure 4.1: Sketch of the heat transfers zones considered by Basu *et al.*. (Adapted from [Basu2005])

The hypothesis of Basu *et al.* is that the heat flux is first transferred to the superheated liquid close to the wall (by convection and transient quenching), part of which contributing to the evaporation through

the liquid-vapor interface. The remaining heat is transferred to the bulk liquid (ϕ_L) either from the superheated liquid layer or bubble condensation. The whole heat transfer mechanism can thus be written as:

$$\phi_w = \phi_{c,L} + \phi_q = \phi_e + \phi_L \quad (4.12)$$

In order to estimate the quenching heat flux associated to bubble sliding and lift-off, Basu *et al.* consider two cases:

- 1) Bubble sliding from departure ($D = D_d$) to lift-off ($D = D_{lo}$) ;
- 2) Bubble coalescence with neighboring sites before departure.

Those two cases are distinguished using the average distance between nucleation sites s , which they suppose equal to $1/\sqrt{N_{sit}}$.

4.2.1 Case 1 : Bubble sliding, $D_d < s$

In this situation, the bubble will grow up to its departure diameter D_d and slide over a length $l_{sl,0}$ before lifting-off. If $l_{sl,0} < s$, the bubble will slide up to its lift-off diameter D_l and leave the wall without colliding with other bubbles. On the contrary, if $l_{sl,0} \geq s$ the sliding bubble will merge with bubbles growing on their nucleation site, inducing a sudden growth of the bubble diameter that can exceed D_{lo} and thus lift-off after sliding over a reduced length $l_{sl} < l_{sl,0}$. Those assumptions are summarized on Figure 4.2.

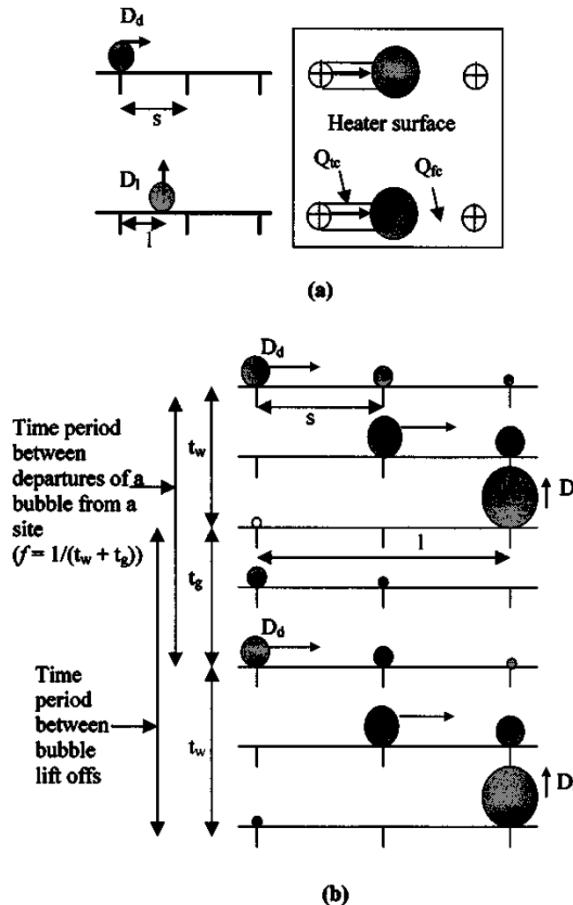


Figure 4.2: Sliding bubble behavior considered by Basu *et al.* (Adapted from [Basu2005])

If bubble coalescence occurs, the number of bubbles lifting-off the surface is lower than the actual number of nucleating sites. Basu *et al.* thus define a reduction factor:

$$R_f = \begin{cases} \frac{s}{l_{sl}} = \frac{1}{l\sqrt{N_{sit}}} & \text{if } l_{sl,0} \geq s \\ 1 & \text{if } l_{sl,0} < s \end{cases} \quad (4.13)$$

Regarding bubble sizes, they suppose that bubbles coalesced by a sliding bubble while growing have a diameter D_d *i.e.* they were close to departure (in reality, the coalesced bubble would have a diameter $D < D_d$). This results in a bubble of diameter $D = (D_{sl}^3 + D_d^3)^{1/3}$ which will lift-off if $D > D_{lo}$. Consequently, a sliding bubble can merge with numerous bubbles before lifting off. Noting N_{merg} the number of coalesced bubble and D_N the resulting bubble diameter, the sliding distance is:

$$l_{sl} = N_{merg}s + l_{D_N \rightarrow D_{lo}} \quad (4.14)$$

where $l_{D_N \rightarrow D_{lo}}$ is the remaining distance to slide if $D_N < D_{lo}$, being 0 if $D_N > D_{lo}$.

The surface swiped by the sliding bubble is then expressed as $A_{sl} = C\bar{D}l_{sl}$ with \bar{D} the average bubble diameter during sliding and C the ration between the bubble diameter and its foot, expressed correlating measurements from Maity [Maity2000] as :

$$C = 1 - \exp(2 - \theta^{0.6}) \quad (4.15)$$

After observing in their experiments that $D_d \approx 0.5D_{lo}$, Basu *et al.* choose:

$$\bar{D} = \frac{D_{lo} + D_d}{2} \approx 0.75D_{lo} \quad (4.16)$$

Noting $t^* = \left(\frac{\lambda_L}{h_{c,L}}\right)^2 \frac{1}{\pi\eta_L}$ the time at which transient conduction heat transfer becomes equal to forced liquid convection, the quenching heat flux is expressed as:

$$\phi_q = \frac{1}{t_w + t_g} \int_0^T \frac{\lambda_L}{\sqrt{\pi\eta_L t}} (T_w - T_L) A_{sl} R_f N_{sit} dt \quad (4.17)$$

where $T = t^*$ if $t^* < t_w + t_g$ (forced convection dominates at some point during a nucleation cycle) or $T = t_w + t_g$ if $t^* \geq t_w + t_g$ (transient conduction dominates over the whole nucleation cycle).

The liquid convective heat transfer is then:

$$\phi_{c,L} = \overline{h_{c,L}} (T_w - T_L) A_{c,L} + \overline{h_{c,L}} (T_w - T_L) A_{sl} R_f N_{sit} \left(1 - \min\left(1 ; \frac{t^*}{t_w + t_g}\right)\right) \quad (4.18)$$

with $A_{c,L} = 1 - A_{sl} R_f N_{sit}$.

And the boiling heat flux:

$$\phi_e = \rho_V h_{LV} \frac{\pi}{6} D_{lo}^3 R_f N_{sit} \frac{1}{t_w + t_g} \quad (4.19)$$

4.2.2 Case 2 : Bubble coalescence without sliding, $D_d \geq s$

Under higher wall superheats, the subsequent rise in the nucleation site density N_{sit} can lead to boiling regimes where bubbles coalesce with each other at early stages of their lifetime *i.e.* while still attached to their nucleation site. This situation is accounted for by Basu *et al.* in the case when $D_d \geq s$ by considering immediate lift-off of coalesced bubble at radius $D > D_{lo}$. In this case, the total number of bubbles leaving the surface is lower than N_{sit} and is thus reduced using:

$$R_f = \frac{s^3}{D_{lo}^3} \quad (4.20)$$

Under this massive coalescing regime, the entire surface will experience quenching due to bubble lift-off all over the heater. Depending on the values of t^* , we have:

$$\phi_q = \begin{cases} \frac{1}{t_w + t_g} \int_0^{t^*} \frac{\lambda_L}{\sqrt{\pi \eta_L t}} (T_w - T_L) dt & \text{if } t^* < t_w \\ \frac{1}{t_w + t_g} \left[\int_0^{t_w} \frac{\lambda_L}{\sqrt{\pi \eta_L t}} (T_w - T_L) dt + \int_0^T \frac{\lambda_L}{\sqrt{\pi \eta_L t}} (T_w - T_L) [1 - S_b N_{sit}] dt \right] & \text{if } t^* \geq t_w \end{cases} \quad (4.21)$$

$$\phi_{c,L} = \begin{cases} \overline{h_{c,L}} (T_w - T_L) \frac{t_w - t^*}{t_w + t_g} + \overline{h_{c,L}} (T_w - T_L) [1 - A_b N_{sit}] \frac{t_g}{t_w + t_g} & \text{if } t^* < t_w \\ \overline{h_{c,L}} (T_w - T_L) [1 - A_b N_{sit}] \frac{t_w + t_g - t^*}{t_w + t_g} & \text{if } t^* \geq t_w \end{cases} \quad (4.22)$$

with $A_b = \frac{\pi (Cs) 2}{4}$.

And the boiling heat flux still expressed as Eq. 4.19.

Needed closure relationships : N_{sit} , t_w , t_g , D_d , D_{lo} , $l_{sl,0}$, $h_{c,L}$.

4.3 GILMAN (2017)

A more recent HFP model dedicated to CFD simulations has been proposed by Gilman & Baglietto in 2017 [gilman2017]. Among the different advances proposed in their work, we can mention :

- A probabilistic law to account for static interaction between nucleation sites ;
- A force-balance approach to compute the bubble departure and lift-off diameters ;
- A generic law for the enhanced forced convection coefficient accounting for bubble presence ;
- The presence of a modified quenching term accounting for local wall superheat beneath a bubble dry spot.

The total heat flux is partitioned between the liquid forced convection $\phi_{c,L}$, the solid quenching $\phi_{q,s}$, the quenching due to bubble sliding $\phi_{q,sl}$ and the evaporation flux ϕ_e . Yielding:

$$\phi_w = \phi_{c,L} + \phi_{q,s} + \phi_{q,sl} + \phi_e \quad (4.23)$$

The convective term is computed in a way similar to Basu *et al.* [Basu2005] in Eq. 4.18:

$$\phi_{c,L} = \phi_{c1,L} + \phi_{c2,L} \quad (4.24)$$

$$= h_{c,L} (1 - A_{sl} N_{sit,a}^*) (T_w - T_L) + \overline{h_{c,L}} A_{sl} N_{sit,a}^* \left(1 - \frac{t^*}{t_w + t_g} \right) (T_w - T_L) \quad (4.25)$$

where $N_{sit,a}^*$ is the active nucleation site density that will generate sliding bubbles, that can differ from the empirical value of available sites N_{sit} usually computed by a correlation.

The active nucleation site density is actually smaller than N_{sit} since Gilman considers an static interaction between the available sites *i.e.* the fact that a bubble laying on a site may be blocking nucleation from sites laying beneath its foot. Following a Complete Spatial Randomness (CSR) approach, they express the probability to find a site under a growing bubble of radius R_d as:

$$\mathcal{P} = 1 - e^{-N_b \pi R_d^2} \quad (4.26)$$

where $N_b = \frac{t_g}{t_w + t_g} N_{sit}$ is the density of bubbles covering the heater.

The number of active sites is then computed as:

$$N_{sit,a} = (1 - \mathcal{P}) N_{sit} \quad (4.27)$$

$$= \exp \left(-\frac{t_g}{t_w + t_g} N_{sit} \pi R_d^2 \right) N_{sit} \quad (4.28)$$

This value is then reduced by Gilman to obtain $N_{sit,a}^*$ using a reduction factor representing sliding bubble coalescence (similar to Basu in Eq. 4.13):

$$N_{sit,a}^* = R_f N_{sit,a} = \frac{s}{l_{sl,0} + s} N_{sit,a} \quad (4.29)$$

The sliding quenching term is also computed in a similar way to Basu as:

$$\phi_{q,sl} = \frac{2\lambda_L (T_w - T_L)}{\sqrt{\pi\eta_L t^*}} A_{sl} N_{sit,a}^* \quad (4.30)$$

$$A_{sl} = \overline{D} l_{sl} = \frac{D_d + D_{lo}}{2} (N_{merg}s + l_{D_N \rightarrow D_{lo}}) \quad (4.31)$$

Regarding the boiling heat flux, Gilman splits it in two contributions respectively associated with the inception of nucleation and liquid microlayer evaporation :

$$\phi_e = \phi_{e,init} + \phi_{e,ML} \quad (4.32)$$

$$= \frac{4}{3}\pi R_d^3 \rho_V h_{LV} \frac{1}{t_w + t_g} N_{sit,a} + V_{ML} \rho_L h_{LV} \frac{1}{t_w + t_g} N_{sit,a} \quad (4.33)$$

$$\text{with } V_{ML} = \frac{2}{3}\pi \left(\frac{R_d}{2}\right)^3 \delta_{max} \quad (4.34)$$

where $\delta_{max} = 2 \mu\text{m}$ based on experiments from Gerardi [Gerardi].

Finally, the solid quenching term is written as:

$$\phi_{q,s} = \rho_w c_{p,w} V_q \delta T_q \frac{1}{t_g + t_w} N_{sit,a} \quad (4.35)$$

$$V_q = \frac{2}{3}\pi r_w^2 \quad (4.36)$$

with $\Delta T_q = 2 K$ as suggested by Gerardi *et al.* [Gerardi_eta].

Needed closure relationships : N_{sit} , t_w , t_g , D_d , D_{lo} , $l_{sl,0}$, $h_{c,L}$, $\overline{h_{c,L}}$.

4.4 ZHOU (2020)

The last HFP model we will look through in this Chapter was proposed by Zhou *et al.* [zhou]. It is one of the most recent available in the literature and was built along with associated experiments for validation. In particular they compute separate heat flux contributions for static (*st*) or sliding bubbles (*sl*), yielding a total heat flux:

$$\phi_w = \phi_{c,L} + (\phi_{e,st} + \phi_{e,sl}) + (\phi_{e,sl} + \phi_{q,sl}) \quad (4.37)$$

An interesting aspect of Zhou *et al.* work is the presence of a condensation term in the evaporation heat fluxes, written as:

$$\phi_{e,st} = \rho_V h_{LV} \frac{4}{3}\pi R_d^3 N_{sit,a} f + h_{cond} (T_{sat} - T_L) A_{cond} N_{sit,a} f (t_g - t_s) \quad (4.38)$$

$$\phi_{e,sl} = \frac{\pi}{6} \rho_V h_{LV} (D_{lo}^3 - D_d^3) f N_{sit}^* + h_{cond} (T_{sat} - T_L) A_{cond} N_{sit}^* t_{sl} f \quad (4.39)$$

$$A_{cond} = \pi D_d \max(R_d (1 + \cos(\theta)) - y_{sat}; 0) \quad (4.40)$$

where y_{sat} is the wall distance where the liquid is at saturation temperature, t_s the moment when $D_b = y_{sat}$ and N_{sit}^* the number of sliding bubbles.

The condensation heat transfer coefficient is computed using the correlation from Ranz & Marshall:

$$h_{cond} = \frac{\lambda_L}{D_d} (2 + 0.6 \text{Re}_b^{0.5}) \text{Pr}_L^{0.3} \quad (4.41)$$

Following similar approaches to HFP models from Basu or Gilman, the quenching heat flux for static bubbles is expressed as:

$$\phi_{q,st} = \begin{cases} t_w f \frac{2\lambda_L (T_w - T_L)}{\sqrt{\pi\eta_L t_w}} A_b N_{sit} & \text{if } t^* \geq t_w \\ t^* f \frac{2\lambda_L (T_w - T_L)}{\sqrt{\pi\eta_L t^*}} A_b N_{sit} + h_{c,L} (T_w - T_L) A_b N_{sit}^* f(t_w - t^*) & \text{if } t^* < t_w \end{cases} \quad (4.42)$$

with $A_b = \underbrace{K_b}_{=2} \pi R_d^2$.

And for the sliding bubbles:

$$\phi_{q,sl} = \begin{cases} \frac{2\lambda_L (T_w - T_L)}{\sqrt{\pi\eta_L (t_g + t_w)}} A_{sl} N_{sit}^* & \text{if } t^* \geq t_g + t_w \\ t^* f \frac{2\lambda_L (T_w - T_L)}{\sqrt{\pi\eta_L t^*}} A_{sl} N_{sit}^* + h_{c,L} (T_w - T_L) A_{sl} N_{sit}^* f(t_g + t_w - t^*) & \text{if } t^* < t_w \end{cases} \quad (4.43)$$

with $A_{sl} = \underbrace{K_{sl}}_{=2} \frac{D_d + D_{lo}}{2} l_{sl}$ and $l_{sl} = \min \left(l_{sl,0} ; \frac{1}{\sqrt{t_g f N_{sit}}} \right)$.

Finally, the forced liquid convective heat flux is computed:

$$\phi_{c,L} = h_{c,L} (1 - A_b N_{sit} - A_{sl} N_{sit}^*) (T_w - T_L) \quad (4.44)$$

Needed closure relationships : N_{sit} , t_w , t_g , D_d , D_{lo} , $l_{sl,0}$, $h_{c,L}$.

4.5 CLOSURE LAWS FOR REMAINING PARAMETERS

In each of the 4 presented HFP models, there is a number of parameters that still need to be computed in order for the model to be fully expressed. Those parameters are often the nucleation site density, bubble diameters, etc. To do so, closure relationships are used and differ from one model to another. Here we want to sum up the different choices of the authors to point the variety of possibilities that exist.

4.5.1 Nucleation Site Density : N_{sit}

The value of the nucleation site density is a very sensitive parameter that controls the intensity of the boiling heat transfer. Unfortunately, its value can vary over a very large range of value depending on the operating conditions and heater material and is thus expressed using experimental correlations.

In their work, Kurul & Podowski used the law of Lemmert and Chawla [**Lemmert**]:

$$N_{sit} = [210 (T_w - T_{sat})]^{1.8} \quad (4.45)$$

Later, Basu [**Basu**] correlated her own experimental results to obtain:

$$N_{sit} = \begin{cases} 0.34 [1 - \cos(\theta)] \Delta T_w^2 & \text{if } \Delta T_{w,ONB} < \Delta T_w < 15 K \\ 3.4 \times 10^{-5} [1 - \cos(\theta)] \Delta T_w^{5.3} & \text{if } \Delta T_w > 15 K \end{cases} \quad (4.46)$$

Finally, Zhou *et al.* followed a approach similar to Basu *et al.* by correlating their own experimental data:

$$N_{sit} = N_0 (1 - \cos(\theta)) [\exp(f(P) \Delta T_w) - 1] f(P) = 0.218 \ln \left(\frac{P}{P_0} \right) + 0.1907 \quad (4.47)$$

with $N_0 = 55\ 395.26\ m^{-2}$ and $P_0 = 1.01\ bar$.

4.5.2 Bubble Departure Frequency f , Growth Time t_g and Wait Time t_w

Historically, Kurul & Podowski modeled the BDF according to Cole [Cole] which derived an expression using photographic observations of bubble nucleation, further verified by Ceumern & Lindenstjerna for pool boiling of water at pressures up to 8 bar. :

$$f = \sqrt{\frac{4}{3} \frac{g(\rho_L - \rho_V)}{\rho_L D_d}} \quad (4.48)$$

Then, assuming that the growth time of the bubble before departure is small compared to the wait time before a new bubble nucleates ($t_{g,d} \ll t_w$) gives :

$$t_w \approx \frac{1}{f} \quad (4.49)$$

Although the assumption of a negligible growth time is true in different cases, notably when bubble departure diameter is small *i.e.* they leave their nucleation site nearly instantly, this is not generally true and the value of the ratio $\frac{t_{g,d}}{t_w}$ can vary by decades depending on the thermal-hydraulics conditions.

Thus, later models considered separate modeling of the growth and wait time in order to compute the BDF as :

$$f = \frac{1}{t_{g,d} + t_w} \quad (4.50)$$

In this scope, Basu *et al.* [Basu] correlated their own experimental results to obtain :

$$t_g = \frac{D_d^2}{45 e^{-0.02} \text{Ja}_L \eta L \text{Ja}_w} \quad (4.51)$$

$$t_w = 139.1 \Delta T_w^{-4.1} \quad (4.52)$$

Gilman & Baglietto [Gilman] chose use the growth law of Zuber [Zuber1961] and the total BDF of Cole (Eq. 4.48) to close the relation 4.50.

$$t_{g,d} = \frac{\pi R_d^2}{4b^2 \text{Ja}_w \eta L}, \quad b = 1.56 \quad (4.53)$$

5

BOILING BUBBLE DYNAMICS


5.1 INTRODUCTION

Boiling bubble parameters are playing an important role in the Heat Flux Partitioning models. For instance, the evaporation heat flux ϕ_e is directly proportional to the bubble lift-off radius R_{lo} ?? while the quenching heat flux ϕ_q depends on the wall area visited by a bubble $A_{q,lb}$ (Eq. ??) which depends on the bubble sliding length l_{sl} , departure radius R_d and lift-off radius R_{lo} .


5.1.1 Experimental Insights

Consequently, many experimental investigations have been conducted to further understand the behavior of nucleated bubbles on a wall while facing a liquid flow. In the case of vertical flow boiling, a typical bubble life cycle can be described as follows:

- Beginning of nucleation, growth while attached to the nucleation site ;
- Detachment occurring at radius R_d , from which the bubble will start to slide and accelerate along the wall ;
- Lift-off from the wall at radius R_{lo} after sliding over a length l_{sl} .

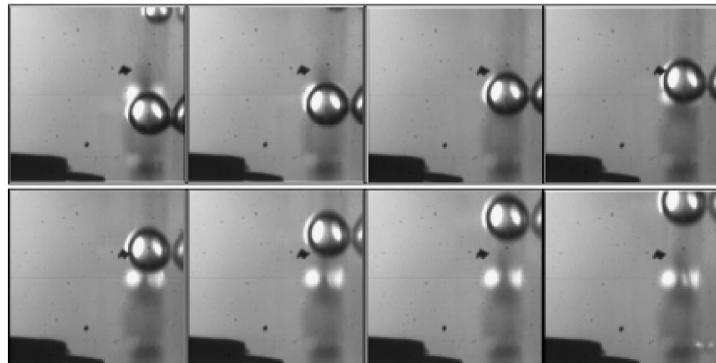

(a) Bubble sliding visualized and adapted from Maity [21] at atmospheric pressure.

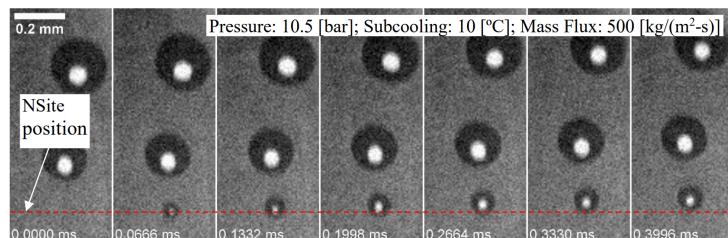

(b) Bubble sliding visualized and adapted from Kossolapov [15] at higher pressure.

Figure 5.1: Visualization of bubble sliding at various pressures.

This behavior has been supported by many experimental observations who clearly observed three stages (departure, sliding, lift-off) both at low pressure (Maity [21], Situ [31], Thorncroft [36], Prodanovic [prodanovic_2006], Chen [3], Ren [28], etc.) and high pressure (March [march_1990], Kossolapov [15]). Altogether, those works cover various flow conditions and operating fluids which insist on the generality of this bubble behavior in vertical flow boiling. Examples from the literature of visualizations of bubble sliding at atmospheric and high pressure are reproduced on Figure 5.1.

The bubble sliding process has also been thermally studied to quantify its impact over the wall heat transfer. Estrada-Perez *et al.* [6] observed the significant thermal impact of sliding bubbles footprints. Kossolapov [15] also investigated the sliding of boiling bubbles and measured the magnitude of the transient heat transfer induced by the disruption of the liquid thermal boundary layer in the bubble's wake. Typical experimental observations from those works are reproduced on Figure 5.2

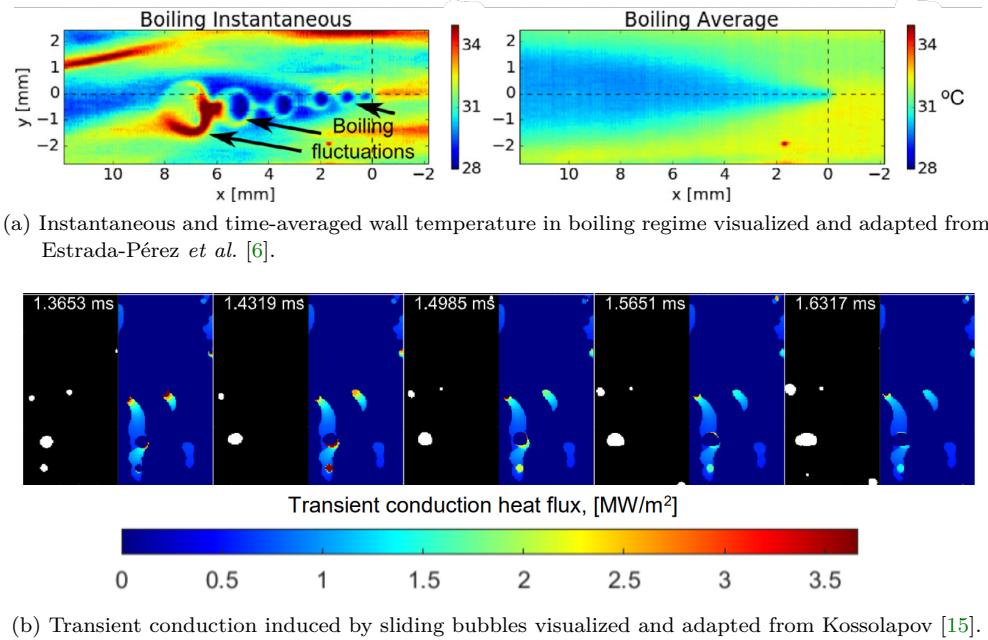


Figure 5.2: Visualization of bubble sliding thermal impact.

Those experimental observations highlight the significant magnitude of the transient heat transfer triggered by bubble movement on the wall that can represent up to 40% of the total wall heat flux [15]. All the aforementioned observations are summed-up on Figure ??.

Predicting the HFP in vertical flow boiling thus requires a descriptions of single bubble dynamics that includes accurate estimations of bubble departure and lift-off radiiuses R_d and R_{lo} as well as bubble sliding velocity \bar{U}_b to predict the sliding length l_{sl} .

5.1.2 Existing Approaches

5.1.2.1 Departure / Lift-Off Diameters

Historically, first approaches to estimate the bubble diameter consisted of experimental-based correlations for pool boiling of horizontal surfaces through photographic studies. In those cases, departure from the nucleation site coincides with the bubble lift-off. Among the mainly used in HFP models and CFD, we can mention the law of Tolubinsky & Kostanchuk (1970)[tolubinsky_diam] which depends only on the local liquid subcooling:

$$D_{lo} = D_0 e^{-\Delta T_L/45}, \quad D_0 = 15\text{mm} \quad (5.1)$$

On the other hand, authors such as Cole & Rohsenow (1968) proposed relationships including the influence of pressure through the capillary length $L_c = \sqrt{\frac{\sigma}{g(\rho_L - \rho_V)}}$:

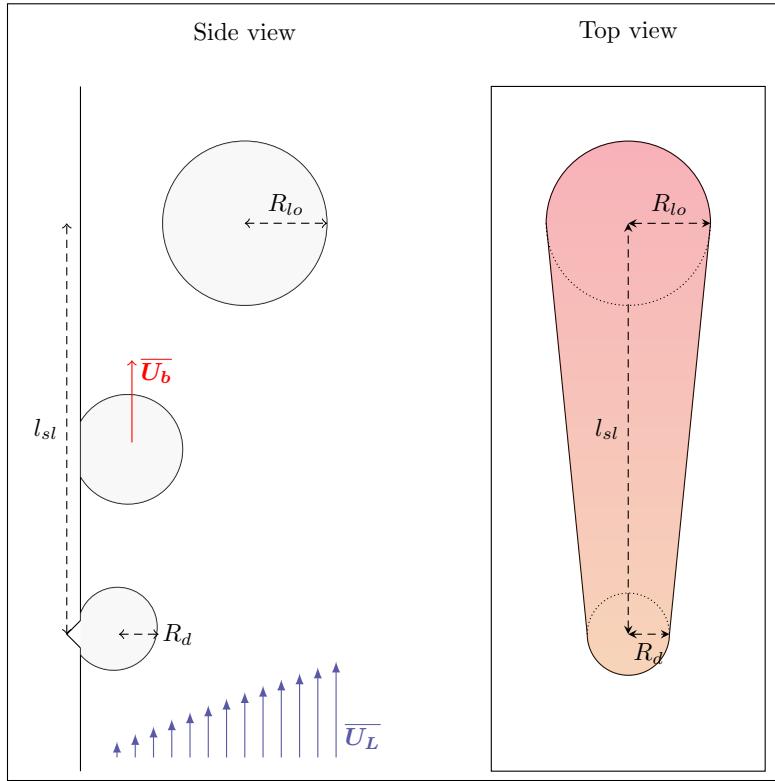


Figure 5.3: Sketch of a typical bubble lifetime in vertical flow boiling. Left depicts a typical side view of the heater with identification of departure, sliding and lift-off. Right depicts a top view of the heater, exhibiting the area that will undergo transient heat transfer.

$$D_{lo} = CL_c \left(\frac{\rho_L c_{p,L} T_{sat}}{\rho_V h_{LV}} \right)^{5/4} \quad (5.2)$$

$C = 1.5 \times 10^{-4}$ for water and 4.65×10^{-4} otherwise.

This equations provides a good trend for the evolution of bubble departure diameter with pressure as shown by Kossolapov [15].

Later, Ünal (1976)[47] derived a correlation based on semi-analytical approach of the heat transfer mechanisms around a bubble to estimate its maximum diameter, including simultaneous influences of pressure, heater material, liquid velocity and subcooling:

$$D_{lo} = 2.42 \times 10^{-5} P^{0.709} \frac{a}{\sqrt{b\varphi}} \quad (5.3)$$

$$a = \frac{\Delta T_w \lambda_w}{2\rho_V h_{LV} \sqrt{\pi \eta_w}}$$

$$b = \frac{\Delta T_L}{2(1 - \rho_V / \rho_L)}$$

$$\varphi = \max \left(1 ; \left(\frac{U_L}{U_0} \right)^{0.47} \right), \quad U_0 = 0.61 \text{ m/s}$$

Ünal validated his law against several measurements from the literature covering pressures from 1 to 177 bars, liquid velocities from 0.08 to 9.15 m/s, subcoolings from 3 to 86K and heat fluxes from 0.47 to 10.64 MW/m².

Remark : The law of Ünal is used in the HFP model of Kurul & Podowski. It as also implemented in NEPTUNE_CFD and includes a correction of Borée *et al.* (Eq. ?? to avoid divergence in bubble diameter when reaching saturated conditions.

More recently, the several developments around HFP models has lead many researchers to propose dedicated correlations for bubble departure or lift-off diameter. For instance, Basu *et al.* fitted expressions for D_d and D_{lo} on their own measurements:

$$\frac{D_d}{L_c} = 1.3 \sin(\theta_s)^{0.4} \left[0.13 e^{-1.75 \times 10^{-4} \text{Re}_{L,D_h}} + 0.005 \right] \text{Ja}_w^{0.45} e^{-0.0065 \text{Ja}_L} \quad (5.4)$$

$$\frac{D_{lo}}{L_c} = 1.3 \sin(\theta_s)^{0.4} \left[0.2 e^{-1.28 \times 10^{-4} \text{Re}_{L,D_h}} + 0.005 \right] \text{Ja}_w^{0.45} e^{-0.0065 \text{Ja}_L} \quad (5.5)$$

They were validated for $14 \leq \text{Ja}_w \leq 56$, $1 \leq \text{Ja}_L \leq 138$, $0 \leq \text{Re}_{L,D_h} \leq 7980$ and $30^\circ \leq \theta_s \leq 90^\circ$.

Remark : Basu *et al.* use these own-developed laws in their HFP formulation to estimate bubble diameters.

Similarly, Kommajosyula gathered several bubble departure and lift-off diameter measurements from the literature and proposed the following reduced correlation:

$$D_d = 18.9 \times 10^{-6} \left(\frac{\rho_L - \rho_V}{\rho_V} \right)^{0.27} \text{Ja}_w^{0.75} (1 + \text{Ja}_L)^{-0.3} U_{L,bulk}^{-0.26} \quad (5.6)$$

$$D_{lo} = 1.2 D_d \quad (5.7)$$

Remark : Although this law (used in Kommajosyula's HFP model) present coherent trends with flow conditions, the raw presence of $U_{L,bulk}$ in the expression is questionable because:

- The relationship is not dimensionless and the constant 18.9×10^{-6} must be in $\text{m}^{1.26} \cdot \text{s}^{-0.26}$;
- The negative exponent will yield diverging values when reaching pool boiling conditions, which is physically inconsistent.

The same type of approach is conducted by Zhou *et al.* [zhou_mechanistic_2021] by correlating low pressure measurements:

$$\frac{D_d}{L_o} = 10^{2.4086} \left(\frac{\rho_V}{\rho_L} \right)^{-0.6613} \text{Ja}_w^{* 0.1557} \text{Ja}_L^{* -0.01592} \text{Re}_{L_o}^{-0.6647} \text{Pr}_L^{-1.8477} \sin(\theta_s)^{0.4} \quad (5.8)$$

$$\frac{D_{lo}}{L_c} = 10^{-1.1990} \left(\frac{\rho_V}{\rho_L} \right)^{-0.9785} \text{Ja}_w^{* 0.1435} \text{Ja}_L^{* -0.0119} \text{Re}_{L_c}^{-0.5129} \text{Pr}_L^{-1.8784} \quad (5.9)$$

with the Reynolds numbers based on $L_o = \frac{\rho_L \nu_L^2}{\sigma}$ and L_c the capillary length, and $\text{Ja}^* = \frac{\rho_L c_{p,L}}{h_{LV}}$ reduced Jakob numbers that do not include the density ratio.

5.1.2.2 Sliding Length and Velocity

Regarding bubble sliding phase, one of the most used correlations to predict bubble diameter evolution has been developed by Maity [21]. Based on atmospheric pressure visualization of boiling single bubbles in water, it predicts the resulting sliding diameter D_{sl} provided a sliding time t_{sl} and initial diameter D_{in} through:

$$\frac{(D_{sl}^2 - D_{in}^2)}{t_{sl} \eta_L \text{Ja}_w} = \frac{1}{15 (0.015 + 0.023 \text{Re}_b^{0.5}) (0.04 + 0.023 \text{Ja}_L^{0.5})} \quad (5.10)$$

where $\text{Re}_b = \frac{U_L D_b}{\nu_L}$

Remark : This correlation is used in Basu *et al.* and Gilman & Baglietto HFP model.

Using Maity measurements of bubble sliding velocity, Basu *et al.* proposed an estimation of the sliding distance for a single bubble $l_{sl,0}$:

$$l_{sl,0} = \int_0^{t_{sl}} U_b \, dt = \int_0^{t_{sl}} C_U \sqrt{t} \, dt = \frac{2}{3} C_U t_{sl}^{3/2} \quad (5.11)$$

$$C_U = 3.2 U_L + 1 \quad (5.12)$$

where C_U represents a correlated acceleration coefficient.

Remark : Basu *et al.* also use this correlation in their model to estimate the bubble sliding length. The estimation of the bubble sliding velocity through an explicit correlation since it varies over the bubble lifetime. Therefore, some authors simply suppose that $U_b = U_L$ such as Gilman & Baglietto.

Other assumptions regarding the sliding length relies on the value of the bubble density on the heater N_{bub} . By supposing that bubbles usually lift-off after coalescing with an other, thus traveling the average distance between two bubbles:

$$l_{sl} = \frac{1}{\sqrt{N_{bub}}} \quad (5.13)$$

Remark : This modeling choice is made by Kommajosyula. Zhou *et al.* choose the minimum value between the $l_{sl,0}$ of Basu (Eq. 5.11) and this average distance between bubbles.

5.1.2.3 Conclusion on Correlations

Albeit proposing coherent trend with the flow boiling conditions along with good estimations of the desired parameters on given experimental datasets, explicit correlations inherently include a limited range of application. Moreover, the constant increase of the number of works proposing data-fitted laws makes the selection of a proper relationship a complicated matter due to their potential lack of generality.

To try to overcome this drawback and come up with more generalized models, researchers have explored an alternative approach by developing Mechanistic Models based on a force-balance to precisely depict the external efforts experienced by the growing bubble. The goal is to compute the sum of the forces applied to the bubble over its growing time and to detect departure and lift-off events using associated criteria such as a change in the force balance sign. This will be the subject of the next section.

As a summary, we gather the presented correlations on Table 5.1.

Bubble Departure Diameter	
Author (Year)	Correlation
Basu <i>et al.</i> (2005)	$\frac{D_d}{L_c} = 1.3 \sin(\theta_s)^{0.4} \left[0.13 e^{-1.75 \times 10^{-4} \text{Re}_{L,D_h}} + 0.005 \right] \text{Ja}_w^{0.45} e^{-0.0065 \text{Ja}_L}$ $L_c = \sqrt{\frac{\sigma}{g(\rho_L - \rho_V)}}$
Kommajosyula (2020)	$D_d = 18.9 \times 10^{-6} \left(\frac{\rho_L - \rho_V}{\rho_V} \right)^{0.27} \text{Ja}_w^{0.75} (1 + \text{Ja}_L)^{-0.3} U_{L,bulk}^{-0.26}$
Zhou (2021)	$\frac{D_d}{L_o} = 10^{2.4086} \left(\frac{\rho_V}{\rho_L} \right)^{-0.6613} \text{Ja}_w^{*0.1557} \text{Ja}_L^{*-0.01592} \text{Re}_{L_o}^{-0.6647} \text{Pr}_L^{-1.8477} \sin(\theta_s)^{0.4}$ $L_o = \frac{\rho_L \nu_L^2}{\sigma}$
Bubble Lift-Off Diameter	
Author (Year)	Correlation
Tolubinsky & Kostanchuk (1970)	$D_{lo} = D_0 e^{-\Delta T_L / 45}, D_0 = 15 \text{mm}$
Cole & Rohsenow (1968)	$D_{lo} = CL_c \left(\frac{\rho_L c_{p,L} T_{sat}}{\rho_V h_{LV}} \right)^{5/4}$ $C = 1.5 \times 10^{-4} \text{ (water)} \text{ or } 4.65 \times 10^{-4} \text{ (other)}, L_c = \sqrt{\frac{\sigma}{g(\rho_L - \rho_V)}}$
Ünal (1976)	$D_{lo} = 2.42 \times 10^{-5} P^{0.709} \frac{a}{\sqrt{b\varphi}}, a = \frac{\Delta T_w \lambda_w}{2\rho_V h_{LV} \sqrt{\pi \eta_w}}$ $b = \frac{\Delta T_L}{2(1 - \rho_V/\rho_L)}, \varphi = \max \left(1 ; \left(\frac{U_L}{U_0} \right)^{0.47} \right), U_0 = 0.61 \text{ m/s}$
Basu <i>et al.</i> (2005)	$\frac{D_{lo}}{L_c} = 1.3 \sin(\theta_s)^{0.4} \left[0.2 e^{-1.28 \times 10^{-4} \text{Re}_{L,D_h}} + 0.005 \right] \text{Ja}_w^{0.45} e^{-0.0065 \text{Ja}_L}$ $L_c = \sqrt{\frac{\sigma}{g(\rho_L - \rho_V)}}$
Kommajosyula (2020)	$D_{lo} = 1.2 D_d$
Zhou (2021)	$\frac{D_{lo}}{L_c} = 10^{-1.1990} \left(\frac{\rho_V}{\rho_L} \right)^{-0.9785} \text{Ja}_w^{*0.1435} \text{Ja}_L^{*-0.0119} \text{Re}_{L_c}^{-0.5129} \text{Pr}_L^{-1.8784}$ $L_c = \sqrt{\frac{\sigma}{g(\rho_L - \rho_V)}}$
Sliding Length, Diameter and Velocity	
Author (Year)	Correlation
Maity (2000)	$\frac{(D_{sl}^2 - D_{in}^2)}{t_{sl} \eta_L \text{Ja}_w} = \left[15 \left(0.015 + 0.023 \text{Re}_b^{0.5} \right) \left(0.04 + 0.023 \text{Ja}_L^{0.5} \right) \right]^{-1}$ $\text{Re}_b = \frac{U_L D_b}{\nu_L}$
Basu <i>et al.</i> (2005)	$l_{sl,0} = \frac{2}{3} C_U t_{sl}^{3/2}, C_U = 3.2 U_L + 1$
Bubble Density Average Distance	$l_{sl} = \frac{1}{\sqrt{N_{bub}}}$

Table 5.1: Summary of the presented correlations

5.2 BUBBLE FORCE BALANCE IN VERTICAL FLOW BOILING

5.2.1 Introduction

The derivation of the force balance over a growing bubble on a wall in a liquid flow is a very complicated problem that many researchers have tried to tackle over the past decades. Many theoretical and numerical approaches have been conducted to estimate the forces at stake in bubble dynamics and sometimes compared to experimental visualization of bubbles in movement.

Among the first propositions of the whole force-balance closure, the work of Klausner *et al.* in 1993 [13] is probably among the most referred to. They proposed a tentatively complete force-balance for a growing bubble in a boiling flow and supposed that departure from the nucleation site is reached when the force balance becomes positive either in the direction of the flow or perpendicular to the wall. They validated their approach against measurements for horizontal flow boiling of refrigerant R113.

In the same framework, many subsequent works were published such as:

- Van Helden *et al.* [39] (1995) who assessed forces coefficients using injected air bubbles in a vertical flow ;
- Thorncroft *et al.* [36, 37] (1998, 2001) who conducted experiments on horizontal and vertical flow boiling of R113 while proposing more general formulations of the force balance that were used to predict bubble diameter measurements ;
- Duhar & Colin [5] (2006) who validated a force balance on bubbles created by air injection in a shear flow. They extended their work with boiling N-pentane experiments and studied the growth and detachment of single bubbles [**duhar_npentane**] ;
- Van Der Geld (2009) [10] used potential flow theory to analytically derive the force balance for deforming bubbles near a plane ;
- Sugrue *et al.* (2014) [34] conducted measurements on boiling bubble for water at atmospheric pressure and various surface orientations. Their measurements were then used to validate a force-balance approach predicting bubble departure by sliding [33] ;
- Mazzocco *et al.* (2018) [22] gathered several measurements of bubble departure and lift-off diameters and proposed a reassessed force-balance approach including new drag coefficient and growth law to achieve predictions with a reasonable accuracy over the database ;
- Ren *et al.* (2020) [28] measured bubble departure diameter for vertical flow boiling of water up to 5 bars which they used to validate a force-balance model.

While not exhaustive, this list aims to show that force-balance modeling has become an increasingly interesting approach for authors. It is though not exempted of limitations because each force requires a proper modeling which needs sometimes to go through empirical choices as we will later discuss. This drawback is particularly noted by Bucci *et al.* [1] who points out that traditional force balances are not equal to zero when the bubble is immobile. On the other hand, they show that this is not due to the absence of unknown forces in the balance but rather associated to the computation of well-known forces such as capillary forces. Moreover, Duhar & Colin [5] managed to reach a zero total balance for their air-injected bubbles, and emphasized the interest of force modeling to deeper understand the physical phenomena behind bubble dynamics.

Each of the previously listed models proposed different upgrades and modifications to the force balance over the bubble. Unfortunately, they were all validated using low pressure experiments due to the lack of pressurized measurements in the literature. In addition, the mentioned common use of empirical parameters makes it difficult to reach a general validation of those models as we will see.

In this section, we aim to propose an update of the bubble force balance for vertical flow boiling with a reduced empiricism and to cover the whole bubble lifetime (departure, sliding, lift-off) while achieving a larger generality by including pressurized measurements up to 40 bar conducted by Kossolapov [15].

5.2.2 General Considerations

When trying to derive the force balance over a bubble, the first step consists of splitting the whole effort experienced by the bubble between different contributions depending on their nature. In our case, we focus on a bubble growing on a vertical wall and facing an upward flow as depicted in Figure 5.4.

Static forces :

- The buoyancy force \overline{F}_B , including Archimedes force and the weight of the bubble ;
- The capillary or surface tension force \overline{F}_C ;
- The contact pressure force \overline{F}_{CP} .

Hydrodynamic forces :

- The drag and lift forces \overline{F}_D and \overline{F}_L ;
- The inertia force \overline{F}_I , including added-mass and Tchen force.

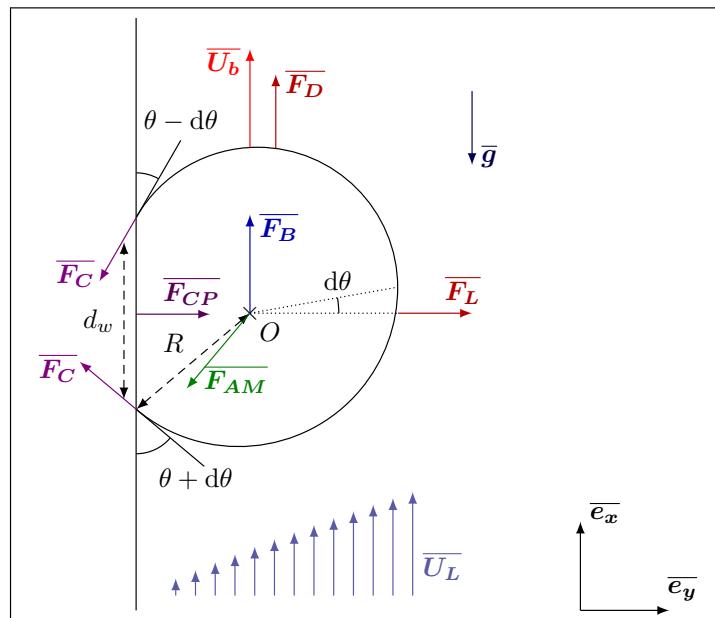


Figure 5.4: Sketch of the forces applied to the bubble facing an upward flow \overline{U}_L and sliding at velocity \overline{U}_b

Regarding the bubble shape, we consider a quasi-spherical bubble of radius R with a circular contact area with the wall of radius r_w . It has a static contact angle θ and is tilted under the influence of the flow by an inclination angle $d\theta$ (half the total angle hysteresis). The resulting downstream and upstream contact angles are therefore $\theta_d = \theta - d\theta$ and $\theta_u = \theta + d\theta$. If the bubble has a shape close to a truncated sphere, we can approximate the bubble foot radius as:

$$r_w \approx R \sin \left(\frac{\theta_u + \theta_d}{2} \right) = R \sin (\theta) \quad (5.14)$$

Some authors rather take $r_w \approx \frac{1}{2}R (\sin (\theta_u) + \sin (\theta_d)) = R \sin (\theta) \cos (d\theta)$, however this expression tends to zero when reaching $d\theta \rightarrow 90^\circ$ which is undesirable regarding the expression of forces such as Contact Pressure and Surface Tension.

We suppose $V_b \approx \frac{4}{3}\pi R^3$ for the bubble volume.

5.2.3 Buoyancy Force

The buoyancy force results from both the weight of the bubble and the integration of the hydrostatic liquid pressure over its surface which naturally yields:

$$\overline{F}_B = \rho_V V_b \bar{g} + \left(\iint_{S_b} \rho_L g z \, d^2 S \right) \bar{e}_x = V_b (\rho_V - \rho_L) \bar{g} = \frac{4}{3}\pi R^3 (\rho_L - \rho_V) g \bar{e}_x \quad (5.15)$$

5.2.4 Contact Pressure Force

The contact pressure force arises due to the pressure difference between the center of the bubble and the surrounding liquid. Combined with the Archimedes force, it can be expressed versus the difference of liquid and vapor pressure at the bubble foot using Laplace's equation $\Delta P = 2\sigma/R_c$ as:

$$\overline{F_{CP}} \approx \frac{2\sigma}{R_c} \pi r_w^2 \overline{e_y} \approx \pi R \sigma 2 \sin(\theta)^2 \overline{e_y} \quad (5.16)$$

Here, R_c is the curvature radius of the bubble which is often assumed to be equal to $5R$ [13, 22, 33] without other explanation than avoiding an overestimation of the contact pressure force. To avoid this arbitrary choice, following the hypothesis of a nearly spherical bubble shape gives $R_c = R$.

5.2.5 Capillary Force

The capillary force acts at the triple contact line at the bubble's foot and is an important adhesive force maintaining the bubble attached to the wall. Its derivation can be done by integration of the effort exerted over the triple contact line. Noting Φ the polar angle around the bubble foot, we have :

$$\overline{F_C} = 2 \int_0^\pi \sigma r_w \bar{\tau}(\Phi) d\Phi \quad (5.17)$$

where $\bar{\tau}$ is the unit vector tangent to the interface.

To compute the resulting components parallel and tangent to the wall, Klausner *et al.* [13] account for a contact angle difference between the upstream (receding) contact angle θ_u and downstream (advancing) contact angle θ_d . If the local contact angle is noted γ , then:

$$\bar{\tau}(\Phi) = \cos(\gamma) \cos(\Phi) \overline{e_x} + \sin(\gamma) \overline{e_y} \quad (5.18)$$

Then representing the evolution of the local contact angle γ from θ_u to θ_d using a polynomial expression of degree 3:

$$\gamma(\Phi) = \theta_d + (\theta_u - \theta_d) \left[3 \left(\frac{\Phi}{\pi} \right)^2 - 2 \left(\frac{\Phi}{\pi} \right)^3 \right], \quad 0 \leq \Phi \leq \pi \quad (5.19)$$

which verifies symmetry conditions:

$$\gamma'(0) = \theta_d, \quad \gamma(\pi) = \theta_u, \quad \gamma'(0) = \gamma'(\pi) = 0 \quad (5.20)$$

To obtain analytic expression, Klausner *et al.* also consider a first order linear interpolation:

$$\gamma(\Phi) = \theta_d + (\theta_u - \theta_d) \frac{\Phi}{\pi} \quad (5.21)$$

This yields:

$$\overline{F_C} = -2r_w \sigma \frac{\pi(\theta_u - \theta_d)}{\pi^2 - (\theta_u - \theta_d)^2} (\sin(\theta_u) + \sin(\theta_d)) \overline{e_x} - 2r_w \sigma \frac{\pi}{\theta_u - \theta_d} (\cos(\theta_d) - \cos(\theta_u)) \overline{e_y} \quad (5.22)$$

By comparing the analytic expression of Eq. 5.22 with the values obtained by numerical integration of Eq. 5.19, Klausner *et al.* introduce a correction factor of 1.25 over the x component, finally giving :

$$\overline{F_C} = -2.5r_w \sigma \frac{\pi(\theta_u - \theta_d)}{\pi^2 - (\theta_u - \theta_d)^2} (\sin(\theta_u) + \sin(\theta_d)) \overline{e_x} - 2r_w \sigma \frac{\pi}{\theta_u - \theta_d} (\cos(\theta_d) - \cos(\theta_u)) \overline{e_y} \quad (5.23)$$

$$= -\pi R \sigma \underbrace{\left[2.5 \frac{r_w}{R} \frac{d\theta}{(\frac{\pi}{2})^2 - d\theta^2} \sin(\theta) \cos(d\theta) \right]}_{f_{C,x}} \overline{e_x} - \pi R \sigma \underbrace{\left[2 \frac{r_w}{R} \sin(\theta) \frac{\sin(d\theta)}{d\theta} \right]}_{f_{C,y}} \overline{e_y} \quad (5.24)$$

Remark : We can see that $f_{C,x} \rightarrow 0$ and $f_{C,y} \rightarrow 2 \frac{r_w}{R} \sin(\theta)$ when $d\theta \rightarrow 0$. In that case, $\overline{F_C} = -\overline{F_{CP}}$.

5.2.6 Drag and Lift Forces

The external liquid flow over the bubble induces the well-known drag and lift forces, acting respectively in the flow direction and perpendicular to the flow. They are usually expressed using associated coefficients C_D and C_L defined by:

$$\overline{F_D} = \frac{1}{2} C_D \rho_L S_p \|\overline{U_L} - \overline{U_b}\| (\overline{U_L} - \overline{U_b}) \quad (5.25)$$

$$\overline{F_L} = \frac{1}{2} C_L \rho_L S_p \|\overline{U_L} - \overline{U_b}\|^2 \overline{e_y} \quad (5.26)$$

with $S_p = \pi R^2$ the projected area of the bubble in the direction of the flow.

5.2.6.1 Drag Coefficient

Derivations of analytic expressions for the drag coefficient in an infinite fluid medium exist for more than a century, starting with Hadamard-Rybinski (1911) [hadamard_1911]:

$$C_D = \frac{16}{Re_b}, \text{ if } Re_b < 1 \quad (5.27)$$

where $Re_b = \frac{|U_{rel}| D_B}{\nu_L}$ is the bubble Reynolds number and U_{rel} the relative velocity between the bubble and the surrounding fluid.

For $Re_b \gg 1$, Levich (1962) [levich_1962] found for a potential flow:

$$C_D = \frac{48}{Re_b} \quad (5.28)$$

For intermediate values of Re_b , traditional approaches rely on expressions of the drag force for a bubble in an infinite medium based on numerical correlations as proposed by Mei & Klausner [24], used in many different mechanistic approaches [3, 28, 33, 37, 43]:

$$C_{D,U} = \frac{16}{Re_b} \left[1 + \left(\frac{8}{Re_b} + \frac{1}{2} \left(1 + \frac{3.315}{\sqrt{Re_b}} \right) \right)^{-1} \right] \quad (5.29)$$

Results from DNS conducted by Legendre *et al.* [18] proposed expressions of the drag and lift forces for a hemispherical bubble on a wall facing a viscous shear flow. Earlier, Legendre & Magnaudet [18] analytically derived coefficients to transpose drag and lift expressions for a particle to the case of a bubble. This was applied by Mazzocco *et al.* [22] to the Drag for a solid particle near a wall in a shear flow proposed by Zeng *et al.* [44].

In this work, we propose to rely on the recent work of Shi *et al.* [30] who conducted DNS of a shear flow over a spherical bubble of constant radius close to a wall for bubble Reynolds number between 10^{-1} and 10^3 and non-dimensional shear rates between -0.5 and 0.5. A sketch of the situation simulated by Shi *et al.* is depicted on Figure 5.5.

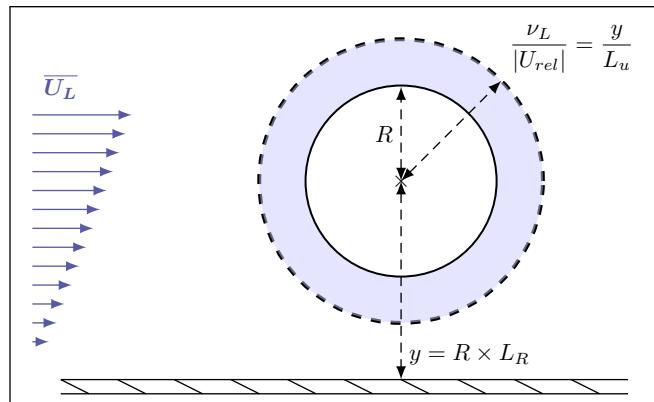


Figure 5.5: Physical situation considered by Shi *et al.* [30].

They computed the resulting drag and lift coefficients for each simulations and proposed correlations fitting their numerical results. The total Drag coefficient is expressed as a correction of the Drag coefficient for a bubble in an unbounded uniform flow $C_{D,U}$. The total drag is given by:

$$C_D = (1 + \Delta C_D) C_{D,U} \quad (5.30)$$

where ΔC_D accounts for both the effect of the shear flow and the wall vicinity.

To cover the whole range of bubble Reynolds numbers, correlations at low and high Re_b are smoothly connected using an exponential term.

$$\Delta C_D = \Delta C_{D,Re_b=O(1)} + \left(1 - e^{-0.07Re_b}\right) \Delta C_{D,Re_b \gg 1} \quad (5.31)$$

Each of those corrections is computed depending on Re_b , the non-dimensional shear rate Sr , the non dimensional wall distance $L_R = \frac{y}{R}$ ($L_R = 1$ being a spherical bubble laying on a wall) and non-dimensional viscous (or Stokes) length $L_u = \frac{y}{\nu_L / |U_{rel}|}$.

$$\begin{aligned} \Delta C_{D,Re_b=O(1)} = & \frac{1 + \tanh(0.012Re_b^{0.8}) + \tanh(0.07Re_b^{0.8})^2}{1 + 0.16L_u(L_u + 4)} \\ & \times \left[\left(\frac{3}{8}L_R^{-1} + \frac{3}{64}L_R^{-4} \right) \left(1 - \frac{3}{8}L_R^{-1} - \frac{3}{64}L_R^{-4} \right)^{-1} - \frac{1}{16} \left(L_R^{-2} + \frac{3}{8}L_R^{-3} \right) Sr \right] \end{aligned} \quad (5.32)$$

$$\Delta C_{D,Re_b \gg 1} = 0.47L_R^{-4} + 0.0055L_R^{-6}Re_b^{3/4} + 0.002|Sr|^{1.9}Re_b + 0.05L_R^{-7/2}SrRe_b^{1/3} \quad (5.33)$$

Figure 5.6 shows the evolution of the Drag correction ΔC_D against the bubble Reynolds number for different distances to the wall L_R and two values of Sr . We can see that as the distance between the wall and the bubble increases the Drag correction logically approaches zero and that increasing the shear rate Sr increases ΔC_D for higher values of Re_b .

Shi *et al.* [30] conducted DNS for wall distances down to $L_R = 1.5$. However, Scheiff *et al.* [29] compared the values obtained for $L_R = 1$ with measured Drag coefficients of bubbles sliding on a wall and observed a good agreement, which legitimates the use of this new Drag correlation by extending its application to the case of a bubble laying on a wall and using the uniform drag coefficient of Eq. 5.29.

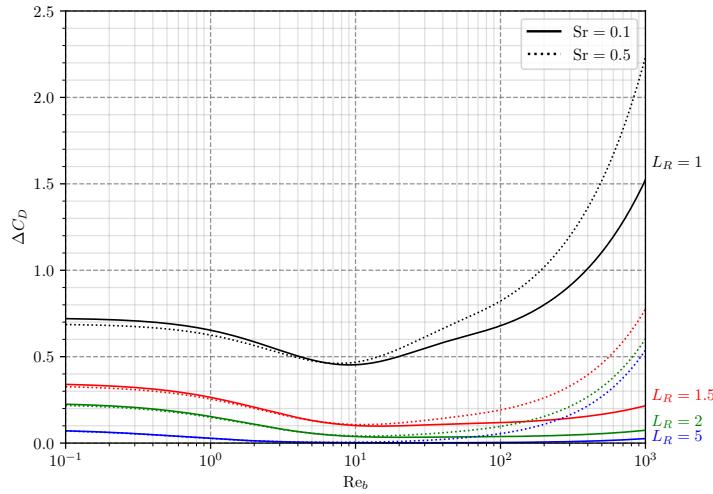


Figure 5.6: Drag correction from Shi *et al.* [30].

5.2.6.2 Lift coefficient

In 1998, Auton *et al.* [auton_1998] analytically derived the lift force for an inviscid fluid in unstationary motion in a weak velocity gradient and found $C_L = 0.5$. Later, Legendre & Magnaudet (1998) used

numerical results to propose a dependency of C_L on the bubble Reynolds number for a sphere in an infinite medium facing a weakly sheared flows as:

$$C_L = (C_{L,\text{Re}_b \sim 1}^2 + C_{L,\text{Re}_b \gg 1}^2)^{1/2} \quad (5.34)$$

$$= \left(\left[\frac{6}{\pi^2} \frac{2.255 (\text{Re}_b \Omega^*)^{-1/2}}{\left(1 + 0.2 \frac{\text{Re}_b}{\Omega^*} \right)^{3/2}} \right]^2 + \left[\frac{1}{2} \frac{1 + 16 \text{Re}_b^{-1}}{1 + 29 \text{Re}_b^{-1}} \right]^2 \right)^{1/2} \quad (5.35)$$

Shi *et al.*:

$$C_L^W = C_{Lu}^W + C_{L\omega}^W \quad (5.36)$$

which corresponds to the superposition of two contributions being the uniform flow and the shear rate, both in presence of the wall.

$$C_{Lu}^W = e^{-0.22 \varepsilon^{0.8} L_\omega^{2.5}} \frac{[1 + \tanh(0.012 \text{Re}_b^{0.8}) + \tanh(0.07 \text{Re}_b^{0.8})]^2}{1 + 0.13 L_u (L_u + 0.53)} \times \left(\frac{L_R}{3} \right)^{-2.0} \tanh(0.01 \text{Re}_b) C_{Lu}^{\text{W-in}} + \left(1 - e^{-0.22 \text{Re}_b^{0.6}} \right) [C_{Lu,\text{Re}_b \rightarrow \infty}^W + 15 \tanh(0.01 \text{Re}_b) \text{Re}_b^{-1} L_R^{-4}] \quad (5.37)$$

$$(5.38)$$

where:

$$C_{Lu}^{\text{W-in}} = \frac{1}{2} \left(1 + \frac{1}{8} L_R^{-1} - \frac{33}{64} L_R^{-2} \right) \quad (5.39)$$

$$C_{Lu,\text{Re}_b \rightarrow \infty}^W = -\frac{3}{8} L_R^{-4} \left[1 + \frac{1}{8} L_R^{-3} + \frac{1}{6} L_R^{-5} \right] + O(L_R^{-10}) \quad (5.40)$$

$$C_{L\omega}^W(\text{Re}, \text{Sr}, L_R) \approx h'_L C_{L\omega}^U(\text{Re} \ll 1) + c_{T3}(\text{Re})(1 + I_{WS}) C_{L\omega}^U(\text{Re} \gg 1) \quad (5.41)$$

$$\text{with } c_{T3}(\text{Re}) = 1 - e^{-0.3\text{Re}} \quad (5.42)$$

$$h'_L(L_\omega, \varepsilon, L_R) = 1 - e^{-\frac{11}{96} \pi^2 \frac{L_\omega}{J_L(\varepsilon)} (1 + \frac{9}{8} L_R^{-1} - \frac{1271}{3520} L_R^{-2})} \quad (5.43)$$

$$J_L(\varepsilon) = J_L(\infty) (1 + 0.2\varepsilon^{-2})^{-3/2} \text{ with } J_L(\infty) = 2.254 \quad (5.44)$$

$$C_{L\omega}^U(\text{Re} \ll 1) = \frac{8}{\pi^2} \frac{\text{Sr}}{|\text{Sr}|} \varepsilon J_L(\varepsilon) \quad (5.45)$$

$$I_{WS} = a_G L_R^{-7/2} (1 + b_G \text{Re}^{-1/2}) \text{ with } a_G = 0.23 \text{ and } b_G = 13 \quad (5.46)$$

$$C_{L\omega}^U(\text{Re} \gg 1) = \frac{2}{3} \text{Sr} (1 - 0.07 |\text{Sr}|) \frac{1 + 16 \text{Re}^{-1}}{1 + 29 \text{Re}^{-1}} \quad (5.47)$$

The following notations are proper to this sub-section of the document. Variables used by Shi *et al.* to describe drag and lift are detailed on Table 5.2

The drag and lift coefficient are computed from their DNS results by integrating the hydrodynamic effort over the bubble's surface. The axial and radial component respectively yielding the drag and lift coefficient when divided by $\pi d^2 \rho_l U_{rel}^2 / 8$.

LIFT COEFFICIENT : The total lift coefficient C_L^W is expressed as :

Name	Definition	Unit
d	Bubble diameter	m
γ	Flow shear rate	s ⁻¹
\tilde{L}	Distance to the wall	m
\tilde{L}_u	$\nu_l / U_{rel} $	m
\tilde{L}_ω	$\sqrt{\nu_l / \omega}$	m
L_u	\tilde{L} / \tilde{L}_u	(-)
L_ω	$\tilde{L} / \tilde{L}_\omega$	(-)
L_R	$2\tilde{L}/d$	(-)
Re	$ U_{rel} d / \nu_l$	(-)
Sr	$\gamma d / U_{rel}$	(-)
ε	$\tilde{L}_u / \tilde{L}_\omega = \sqrt{ \text{Sr} / \text{Re}}$	(-)

Table 5.2: Variables used by Shi *et al.*

5.2.7 Inertia Force

The Inertia force originates from various effects (bubble growth, freestream and bubble acceleration, etc.) that includes both Added Mass and Tchen forces and is expressed as [20]:

$$\overline{F_I} = \underbrace{\rho_L V_b \left(\frac{\partial \overline{U}_L}{\partial t} + \overline{\nabla}(U_L) \cdot \overline{U}_L \right)}_{\text{Liquid inertia or Tchen force}} + \underbrace{\frac{d}{dt} (\rho_L C_{AM} V_b (\overline{U}_L - \overline{U}_b))}_{\text{Added Mass force } \overline{F}_{AM}} \quad (5.48)$$

Since we consider a steady and quasi-parallel liquid flow, the inertia term is equal to zero.

5.2.7.1 Former Approaches

In previous Mechanistic Models, the derivation of the Added Mass force was conducted with different approaches. In particular, some authors have chosen to rely on the Rayleigh-Plesset Equation for a growing hemispherical bubble in a quiescent flow to obtain the reaction force from the liquid, oriented perpendicularly to the wall.

$$\overline{F_{AM,RPE}} = -\rho_L \pi R^2 \left[R \ddot{R} + \frac{3}{2} \dot{R}^2 \right] \overline{e_y} \quad (5.49)$$

Then, assuming a bubble inclination angle θ_i , this force is projected along the x axis to obtain an Added Mass force parallel to the wall that hinders departure. The inclination angle value is often empirical and used for data fitting [4, 22, 28, 43].

$$\overline{F_{AM,RPE}} = -\rho_L \pi R^2 \left[R \ddot{R} + \frac{3}{2} \dot{R}^2 \right] (\sin(\theta_i) \overline{e_x} + \cos(\theta_i) \overline{e_y}) \quad (5.50)$$

This approach is questionable on different aspects. First, the RPE assumes a moving boundary in a quiescent unbounded liquid, which is physically far from the real situation of a bubble growing on a wall in a boiling flow. Moreover, the subsequent projection along the different directions regarding an unknown angle is hardly reasonable if θ_i is chosen arbitrarily.

On the other hand, some authors [11, 13, 37] considered two distinct contributions:

- Hemispherical bubble growth in a stagnant liquid, leading to Eq. 5.52 including the inclination angle θ_i ;
- Spherical bubble growth in an uniform unbounded and inviscid liquid flow, which yields a detaching Added Mass term due to the interaction of bubble growth with the external flow:

$$\overline{F_{AM,U}} = \frac{3}{2} \rho_L V_b \frac{\dot{R}}{R} U_L \overline{e_x} \quad (5.51)$$

By including the effect of the liquid flow, this approach can be considered as closer to the reality. However, it relies on two separate derivations associated to different physical considerations.

5.2.7.2 Proposed Approach

To tackle the Added Mass derivation in a proper way, we propose to follow the approach of Lamb [16] (also presented by Milne Thomson [25] or Van Winjaarden [40]). By solving the potential flow around a bubble and its image, we can obtain the total liquid kinetic energy E_L that corresponds to a situation where a bubble is at a given distance from a wall (represented by the line normal to the line of centers of the bubbles).

Then, using Lagrange's equations to compute the resulting forces in each direction:

$$F_{AM,x} = -\frac{\partial}{\partial t} \left(\frac{\partial E_L}{\partial \dot{x}} \right) + \frac{\partial E_L}{\partial x} \quad (5.52)$$

$$F_{AM,y} = -\frac{\partial}{\partial t} \left(\frac{\partial E_L}{\partial \dot{y}} \right) + \frac{\partial E_L}{\partial y} \quad (5.53)$$

To express the liquid kinetic energy, we can rely on the work of Van Der Geld [10] who derived E_L in the case of a full or truncated spherical bubble laying on a wall and facing an uniform flow parallel to the wall of velocity U_L (Eq. 5.56). If the bubble slides at a velocity $U_b = \dot{x}$, it sees a liquid velocity $U_{rel} = U_L - \dot{x}$.

$$E_L = \frac{\rho_L V_b}{2} \left(\alpha \dot{y}^2 + \text{tr}(\beta) \dot{R}^2 + \psi \dot{R} \dot{y} + \alpha_2 (U_L - \dot{x})^2 \right) \quad (5.54)$$

where (x, y) are the coordinates of the bubble's center and $\alpha, \text{tr}(\beta), \psi, \alpha_2$ are polynomials of $R/y = 1/L_R$ derived by Van Der Geld for $1 < R/y < 2$ i.e. $0.5 < L_R < 1$.

Injecting E_L in Eq. 5.54 and 5.55 and computing the values for the sphere case ($y = R$ and $\dot{y} = \dot{R}$) yields:

$$F_{AM,x} = \rho_L V_b \left[3C_{AM,x} \frac{\dot{R}}{R} U_{rel} - C_{AM,x} \frac{\partial U_b}{\partial t} \right] \quad (5.55)$$

with $C_{AM,x} \approx 0.636$.

$$F_{AM,y} = \rho_L V_b \left[-(3C_{AM,y1} + C_{AM,y2}) \frac{\dot{R}^2}{R} - C_{AM,y1} \dot{R} + C_{AM,y3} \frac{U_{rel}^2}{R} \right] \quad (5.56)$$

with $C_{AM,y1} \approx 0.27$, $C_{AM,y2} \approx 0.326$ and $C_{AM,y3} \approx 8.77 \times 10^{-3}$.

Parallel to the wall, the coupled term $\frac{\dot{R}}{R} U_{rel}$ in Eq. 5.57 promotes detachment and sliding of the bubble if $U_{rel} > 0$ e.g. if the bubble is attached to its nucleation site. This relatively agrees with the detaching term of the "two situations" derivations detailed in 5.2.7.1 and clearly contradicts the aforementioned approach where solely projecting the RPE on both axes lead to an Added-Mass term related to bubble growth that only hinders the departure by sliding.

Moreover, Eq. 5.58 exhibits a term induced by the relative velocity that acts as a lift force, which seems to rarely appear in other approaches.

Here we want to insist on the importance on conducting an approach as rigorous as possible when deriving those transient aspects of the force balance. Otherwise, some terms may be missing and lead to contradictory physical conclusions. Although the proposed method has already been used in different works, we obtained revisited values of the Added Mass coefficients based on the derivation of the liquid kinetic energy by Van Der Geld.

In the spirit of avoiding to introduce extra empirical terms, we keep the Added Mass force as presented in Eq. 5.57 and 5.58. No projection of the y term along the x axis to account for asymmetric bubble growth is considered in this study.

5.2.8 Added Mass force of a growing bubble

Added mass effects are experienced by the bubble :

- when its boundary is moving during its growth

- when accelerating while sliding on the wall
- when the surrounding liquid is accelerating

We consider a spherical cap shaped bubble standing on a plane wall and facing an uniform liquid velocity U . In this situation, Van Der Geld derived the potential flow around the bubble and expressed the liquid kinetic energy, obtaining :

$$T_L = \rho_L V_b \left(\frac{1}{2} \alpha \dot{y}^2 + \frac{1}{2} \text{tr}(\beta) \dot{R}^2 + \frac{1}{2} \psi \dot{R} \dot{y} + \frac{1}{2} \alpha_2 U^2 \right) \quad (5.57)$$

where α , $\text{tr}(\beta)$, ψ and α_2 are polynomimals of $\lambda = \frac{R}{2h}$. We also have x and $y = h$ denoting the coordinates of the geometrical center of the bubble.

Therefore, we can write those coefficients in the following form :

$$\alpha = \sum_{k=0}^n \alpha_k \frac{R^k}{2^k y^k} \quad (5.58)$$

If we suppose that the generalized coordinates and velocities x , \dot{x} , y , \dot{y} , R , and \dot{R} , we can use the expression of the kinetic energy of the fluid to apply Lagrange's equations to derive the added mass forces on the bubble in both direction parallel and normal to the wall :

$$F_{AM,x} = -\frac{\partial}{\partial t} \left(\frac{\partial T_L}{\partial \dot{x}} \right) + \frac{\partial T_L}{\partial x} \quad (5.59)$$

$$F_{AM,y} = -\frac{\partial}{\partial t} \left(\frac{\partial T_L}{\partial \dot{y}} \right) + \frac{\partial T_L}{\partial y} \quad (5.60)$$

In the case of the sliding bubble, we replace the uniform liquid velocity U by the relative velocity experienced by the bubble $U_{rel} = U_{liq} - \dot{x}$ where U_{liq} is the uniform surrounding liquid velocity and \dot{x} the velocity of the center of the bubble, which is the sliding velocity of the bubble. Yielding :

$$T_L = \frac{\rho_L V_b}{2} \left(\alpha \dot{y}^2 + \text{tr}(\beta) \dot{R}^2 + \psi \dot{R} \dot{y} + \alpha_2 (U_{liq} - \dot{x})^2 \right) \quad (5.61)$$

ADDED MASS IN x DIRECTION Parallel to the wall, since λ depends on y and R , it is independent of \dot{x} , yielding zero-derivatives for the added mass coefficients. We can write :

$$\frac{\partial T_L}{\partial \dot{x}} = \frac{\rho_L V_b}{2} \alpha_2 \frac{\partial ((U_{liq} - \dot{x})^2)}{\partial \dot{x}} \quad (5.62)$$

$$= \rho_L V_b \alpha_2 (\dot{x} - U_{liq}) \quad (5.63)$$

$$(5.64)$$

As for the time derivatives, we have :

$$\frac{\partial V_b}{\partial t} = \frac{\partial \frac{4}{3} \pi R^3}{\partial t} = 4\pi R^2 \dot{R} \quad (5.65)$$

$$\frac{\partial \lambda}{\partial t} = \frac{\dot{R} 2y - R 2\dot{y}}{4y^2} = \lambda \left(\frac{\dot{R}}{R} - \frac{\dot{y}}{y} \right) = \lambda \left(\frac{\dot{R}}{R} - 2\lambda \frac{\dot{y}}{R} \right) = \frac{\lambda}{R} (\dot{R} - 2\lambda \dot{y}) \quad (5.66)$$

$$\frac{\partial \alpha}{\partial t} = \sum_{k=0}^n \alpha_k \frac{\partial \lambda^k}{\partial t} = \sum_{k=0}^n \alpha_k k \lambda^{k-1} \frac{\partial \lambda}{\partial t} = \underbrace{\left(\frac{\dot{R}}{R} - \frac{\dot{y}}{y} \right) \sum_{k=0}^n \alpha_k k \lambda^k}_{\tilde{\alpha}} = \frac{1}{R} (\dot{R} - 2\lambda \dot{y}) \tilde{\alpha} \quad (5.67)$$

Yielding :

$$\frac{\partial}{\partial t} \left(\frac{\partial T_L}{\partial \dot{x}} \right) = \rho_L \left[4\pi R^2 \dot{R} \alpha_2 (\dot{x} - U_{liq}) + \frac{4}{3} \pi R^3 \left(\frac{\dot{R}}{R} - \frac{\dot{y}}{y} \right) \tilde{\alpha}_2 (\dot{x} - U_{liq}) + \frac{4}{3} \pi R^3 \alpha_2 \ddot{x} \right] \quad (5.68)$$

$$= 4\pi R^2 \rho_L \left[\alpha_2 \dot{R} (\dot{x} - U_{liq}) + \frac{\tilde{\alpha}_2}{3} (\dot{R} - 2\lambda \dot{y}) (\dot{x} - U_{liq}) + \frac{R}{3} \alpha_2 \ddot{x} \right] \quad (5.69)$$

$$= 4\pi R^2 \rho_L \left[\left(\alpha_2 + \frac{\tilde{\alpha}_2}{3} \right) \dot{R} (\dot{x} - U_{liq}) - \frac{2}{3} \lambda \tilde{\alpha}_2 \dot{y} (\dot{x} - U_{liq}) + \frac{R}{3} \alpha_2 \ddot{x} \right] \quad (5.70)$$

We also have, with the independence of the variables :

$$\frac{\partial T_L}{\partial x} = 0 \quad (5.71)$$

Finally yielding,

$$F_{AM,x} = 4\pi R^2 \rho_L \left[\left(\alpha_2 + \frac{\tilde{\alpha}_2}{3} \right) \dot{R} U_{rel} - \frac{2}{3} \lambda \tilde{\alpha}_2 \dot{y} U_{rel} - \frac{R}{3} \alpha_2 \ddot{x} \right] \quad (5.72)$$

We can immediately observe that the added mass related to the bubble growth will promote detachment when the bubble is still attached to its nucleation site ($\dot{x} = 0$). This contradicts the often-used approach using solely the Rayleigh-Plesset equation projected in both direction using the inclination angle of the bubble.

The other part of this added-mass force is naturally linked to the acceleration of the bubble and the mass of displaced liquid.

ADDED MASS IN y DIRECTION Following the same approach normal to the wall, we obtain :

$$\frac{\partial T_L}{\partial \dot{y}} = \frac{1}{2} \rho_L \frac{4}{3} \pi R^3 (\alpha_2 \dot{y} + \psi \dot{R}) = \rho_L \frac{4}{3} \pi R^3 \left(\alpha \dot{y} + \frac{\psi}{2} \dot{R} \right) \quad (5.73)$$

$$\frac{\partial}{\partial t} \left(\frac{\partial T_L}{\partial \dot{y}} \right) = \rho_L 4\pi R^2 \dot{R} \left(\alpha \dot{y} + \frac{1}{2} \psi \dot{R} \right) + \rho_L \frac{4}{3} \pi R^3 \left(\frac{1}{R} (\dot{R} - 2\lambda \dot{y}) \tilde{\alpha} \dot{y} + \alpha \ddot{y} + \frac{1}{2} \tilde{\psi} \frac{1}{R} (\dot{R} - 2\lambda \dot{y}) \dot{R} + \frac{1}{2} \psi \ddot{R} \right) \quad (5.74)$$

$$= \rho_L 4\pi R^2 \left[\frac{\alpha}{3} R \ddot{y} + \frac{\psi}{6} R \ddot{R} + \left(\frac{\psi}{2} + \frac{\tilde{\psi}}{6} \right) \dot{R}^2 - \frac{2}{3} \lambda \tilde{\alpha} \dot{y}^2 + \left(\alpha + \frac{\tilde{\alpha}}{3} - \frac{\tilde{\psi}}{3} \right) \dot{R} \dot{y} \right] \quad (5.75)$$

$$\frac{\partial T_L}{\partial y} = \rho_L \frac{4}{3} \pi R^3 \left(\frac{1}{2} \frac{\partial \alpha}{\partial y} \dot{y}^2 + \frac{1}{2} \frac{\partial \text{tr}(\beta)}{\partial y} \dot{R}^2 + \frac{1}{2} \frac{\partial \psi}{\partial y} \dot{R} \dot{y} + \frac{1}{2} \frac{\partial \alpha_2}{\partial y} (U_{liq} - \dot{x})^2 \right) \quad (5.76)$$

Where we can write :

$$\frac{\partial \alpha}{\partial y} = \sum_{k=0}^n \alpha_k \frac{\partial \lambda^k}{\partial y} = \sum_{k=0}^n \alpha_k \frac{R^k}{2^k} \frac{\partial}{\partial y} \left(\frac{1}{y^k} \right) = \sum_{k=0}^n \alpha_k \frac{R^k}{2^k} (-k) \frac{1}{y^{k+1}} = \frac{1}{y} \sum_{k=0}^n (-k) \alpha_k \lambda^k = -\frac{1}{y} \tilde{\alpha} \quad (5.77)$$

Giving :

$$\frac{\partial T_L}{\partial y} = \rho_L 4\pi R^2 \frac{R}{6y} \left[-\tilde{\alpha} \dot{y}^2 - \text{tr}(\tilde{\beta}) \dot{R}^2 - \tilde{\psi} \dot{R} \dot{y} - \tilde{\alpha}_2 U_{rel}^2 \right] \quad (5.78)$$

$$= -\rho_L 4\pi R^2 \frac{\lambda}{3} \left[\tilde{\alpha} \dot{y}^2 + \text{tr}(\tilde{\beta}) \dot{R}^2 + \tilde{\psi} \dot{R} \dot{y} + \tilde{\alpha}_2 U_{rel}^2 \right] \quad (5.79)$$

Which finally yields :

$$F_{AM,y} = -\rho_L 4\pi R^2 \left[\frac{\alpha}{3} R\dot{y} + \frac{\psi}{6} R\ddot{R} + \left(\frac{\psi}{2} + \frac{\tilde{\psi}}{6} \right) \dot{R}^2 - \frac{2}{3} \lambda \tilde{\alpha} \dot{y}^2 + \left(\alpha + \frac{\tilde{\alpha}}{3} - \frac{\tilde{\psi}}{3} \right) \dot{R}\dot{y} \right] - \rho_L 4\pi R^2 \frac{\lambda}{3} \left[\tilde{\alpha} \dot{y}^2 + \text{tr}(\tilde{\beta}) \dot{R}^2 + \tilde{\psi} \dot{R}\dot{y} + \tilde{\alpha}_2 U_{rel}^2 \right] \quad (5.80)$$

$$= \rho_L 4\pi R^2 \left[\frac{\lambda}{3} \tilde{\alpha} \dot{y}^2 + \left(-\frac{\lambda}{3} \text{tr}(\tilde{\beta}) - \frac{\psi}{2} - \frac{\tilde{\psi}}{6} \right) \dot{R}^2 + \left(-\alpha - \frac{\tilde{\alpha}}{3} + \frac{1-\lambda}{3} \tilde{\psi} \right) \dot{R}\dot{y} - \frac{\alpha}{3} R\dot{y} - \frac{\psi}{6} R\ddot{R} - \frac{\lambda}{3} \tilde{\alpha}_2 U_{rel}^2 \right] \quad (5.81)$$

Where :

$$\begin{aligned} \alpha &= 111.62137 - 844.131315\lambda + 2678.058461\lambda^2 - 4534.349913\lambda^3 \\ &\quad + 4311.889654\lambda^4 - 2180.345705\lambda^5 + 457.591961\lambda^6 \end{aligned} \quad (5.82)$$

$$\begin{aligned} \psi &= -220.824854 + 1639.114567\lambda - 5130.691427\lambda^2 + 8625.857798\lambda^3 \\ &\quad - 8169.91248\lambda^4 + 4121.492877\lambda^5 - 863.784836\lambda^6 \end{aligned} \quad (5.83)$$

$$\begin{aligned} \text{tr}(\beta) &= 104.601303 - 736.214699\lambda + 2293.784611\lambda^2 - 3857.878559\lambda^3 \\ &\quad + 3659.95521\lambda^4 - 1849.854303\lambda^5 + 388.412909\lambda^6 \end{aligned} \quad (5.84)$$

$$\alpha_2 = 0.359528 + 1.341274\lambda - 1.973813\lambda^2 + 0.796613\lambda^3 \quad (5.85)$$

If we define added mass coefficients C_{AM} as :

$$F_{AM,x} = \pi R^2 \rho_L (C_{AM,x1} \dot{R} U_{rel} + C_{AM,x2} \dot{y} U_{rel} + C_{AM,x3} R \ddot{x}) \quad (5.86)$$

$$F_{AM,y} = \pi R^2 \rho_L (C_{AM,y1} \dot{y}^2 + C_{AM,y2} \dot{R}^2 + C_{AM,y3} \dot{R}\dot{y} + C_{AM,y4} R\ddot{y} + C_{AM,y5} R\ddot{R} + C_{AM,y6} U_{rel}^2) \quad (5.87)$$

We obtain :

$$C_{AM,x1} = 6.372904\lambda^3 - 13.1587533\lambda^2 + 7.15346133\lambda + 1.438112 \quad (5.88)$$

$$C_{AM,x2} = -6.372904\lambda^4 + 10.527002667\lambda^3 - 3.576730667\lambda^2 \quad (5.89)$$

$$C_{AM,x3} = -1.062150667\lambda^3 + 2.631750667\lambda^2 - 1.78836533\lambda - 0.479370667 \quad (5.90)$$

$$\begin{aligned} C_{AM,y1} &= 3660.735688\lambda^7 - 14535.638033\lambda^6 + 22996.74482133\lambda^5 - 18137.399652\lambda^4 + 7141.48922933\lambda^3 \\ &\quad - 1125.50842\lambda^2 \end{aligned} \quad (5.91)$$

$$\begin{aligned} C_{AM,y2} &= -3107.303272\lambda^7 + 17515.071036\lambda^6 - 41501.056736\lambda^5 + 53557.772476\lambda^4 - 40620.190154667\lambda^3 \\ &\quad + 18083.92435533\lambda^2 - 4370.972178667\lambda + 441.649708 \end{aligned} \quad (5.92)$$

$$\begin{aligned} C_{AM,y3} &= 6910.278688\lambda^7 - 39878.0014\lambda^6 + 94306.5065933\lambda^5 - 118320.60118933\lambda^4 + 84460.07430133\lambda^3 \\ &\quad - 33721.052968\lambda^2 + 6687.51976933\lambda - 446.48548 \end{aligned} \quad (5.93)$$

$$\begin{aligned} C_{AM,y4} &= -610.122614667\lambda^6 + 2907.12760667\lambda^5 - 5749.18620533\lambda^4 + 6045.799884\lambda^3 \\ &\quad - 3570.744614667\lambda^2 + 1125.50842\lambda - 148.8284933 \end{aligned} \quad (5.94)$$

$$\begin{aligned} C_{AM,y5} &= 575.85655733\lambda^6 - 2747.661918\lambda^5 + 5446.60832\lambda^4 - 5750.57186533\lambda^3 \\ &\quad + 3420.46095133\lambda^2 - 1092.743044667\lambda + 147.21656933 \end{aligned} \quad (5.95)$$

$$\begin{aligned} C_{AM,y6} &= -3.186452\lambda^4 + 5.26350133\lambda^3 - 1.78836533\lambda^2 \\ &\quad + 3.186452\lambda^2 - 5.26350133\lambda^3 + 1.78836533\lambda^2 \end{aligned} \quad (5.96)$$

$$\quad (5.97)$$

In the case of the full or truncated sphere on a wall, we can write $y = R\cos(\theta)$ and $\dot{y} = \dot{R}\cos(\theta)$ if we suppose a quasi-constant contact angle during bubble lifetime. Moreover, $\lambda = 1/2\cos(\theta)$. The added-mass forces then become :

$$F_{AM,x} = \rho_L \pi R^2 [(C_{AM,x1} + C_{AM,x2} \cos(\theta)) \dot{R} U_{rel} + C_{AM,x3} R \ddot{x}] \quad (5.98)$$

$$F_{AM,y} = \rho_L \pi R^2 [(C_{AM,y1} \cos(\theta)^2 + C_{AM,y2} + C_{AM,y3} \cos(\theta)) \dot{R}^2 + (C_{AM,y4} \cos(\theta) + C_{AM,y5}) R \ddot{R} + C_{AM,y6} U_{rel}^2] \quad (5.99)$$

Finally, if we consider the full sphere case : $\theta = 0$ and $\lambda = 0.5$, we can estimate the numerical values of the sphere added mass coefficients $C_{AM,S}$:

$$F_{AM,x} = \rho_L \pi R^2 [C_{AM,Sx1} \dot{R} U_{rel} + C_{AM,Sx2} R \ddot{x}] \quad (5.100)$$

$$F_{AM,y} = \rho_L \pi R^2 [C_{AM,Sy1} \dot{R}^2 + C_{AM,Sy2} R \ddot{R} + C_{AM,Sy3} U_{rel}^2] \quad (5.101)$$

where $C_{AM,Sx1} \approx 2.5451535$; $C_{AM,Sx2} \approx -0.8483845$

$C_{AM,Sy1} \approx 4.774859833$; $C_{AM,Sy2} \approx -0.359872041667$ and $C_{AM,Sy3} \approx 0.0116930833$

5.2.9 Added Mass from Duhar et al.

$$\overline{F_{AM}} = -\rho_L \frac{d}{dt} \left[V_b \frac{1}{2} \left(1 + \frac{3}{16} \left(\frac{R}{y} \right)^3 \right) (U_{b,x} - U_L) \overline{e_x} + V_b \frac{1}{2} \left(1 + \frac{3}{8} \left(\frac{R}{y} \right)^3 \right) U_{b,y} \overline{e_y} \right] \quad (5.102)$$

$$+ \frac{3}{32} \rho_L \frac{d^2}{dt^2} (RV_b) \left(\frac{R}{y} \right)^2 \overline{e_y} + \frac{\pi R^2}{2} \left(\frac{R}{y} \right)^4 \left[\frac{3}{8} U_{rel}^2 + \frac{3}{4} U_{b,y}^2 \right] \overline{e_y} \quad (5.103)$$

Yielding :

$$\overline{F_{AM}} \cdot \overline{e_x} = \frac{\rho_L V_b}{2} \left[3 \left(1 + \frac{3}{16} \left(\frac{R}{y} \right)^3 \right) \frac{\dot{R}}{R} U_{rel} + \frac{9}{16} \left(\frac{R}{y} \right)^3 \left(\frac{\dot{R}}{R} - \frac{\dot{y}}{y} \right) U_{rel} - \left(1 + \frac{3}{16} \left(\frac{R}{y} \right)^3 \right) \frac{\partial U_{b,x}}{\partial t} \right] \quad (5.104)$$

$$\overline{F_{AM}} \cdot \overline{e_y} = \frac{-\rho_L V_b}{2} \left[3 \left(1 + \frac{3}{8} \left(\frac{R}{y} \right)^3 \right) \frac{\dot{R}}{R} U_{b,y} + \frac{3}{8} \left(\frac{R}{y} \right)^3 \left(\frac{\dot{R}}{R} - \frac{\dot{y}}{y} \right) U_{b,y} + \left(1 + \frac{3}{8} \left(\frac{R}{y} \right)^3 \right) \frac{\partial U_{b,y}}{\partial t} \right] \quad (5.105)$$

$$\frac{\rho_L V_b}{2} \left[\frac{3}{4} \left(\frac{R}{y} \right)^2 \left(\ddot{R} + 3 \frac{\dot{R}^2}{R} \right) \right] + \frac{\rho_L V_b}{2} \left[\frac{3}{4} \left(\frac{R}{y} \right)^4 \left(\frac{3}{8} \frac{U_{rel}^2}{R} + \frac{3}{4} \frac{U_{b,y}^2}{R} \right) \right] \quad (5.106)$$

5.2.10 Force Balance Summary

On Table 5.3, we sum up some of the mentioned force balance approaches and their models.

	Klausner (1993) [13]	Thorncroft (2001) [37]	Sugrue (2016) [33]
Forces	$\bar{F}_B = \frac{4}{3}\pi R^3 (\rho_L - \rho_V) \bar{g}$	$\frac{4}{3}\pi R^3 (\rho_L - \rho_V) \bar{g}$	$\frac{4}{3}\pi R^3 (\rho_L - \rho_V) \bar{g}$
	\bar{F}_C Eq. ??, $r_w = 0.045$ mm	Eq. ??, $r_w = R \sin(\theta_d)$	Eq. ??, $r_w = 0.025R$
	\bar{F}_{CP} Eq. 5.16, $R_c = 5R$	Neglected	Eq. 5.16, $R_c = 5R$
	\bar{F}_D $C_D = \frac{16}{Re_b} \left[1 + \frac{3}{2} \left(\left(\frac{12}{Re_b} \right)^n + 0.796^n \right)^{1/n} \right], n = 0.65$	$C_D = \frac{16}{Re_b} \left[1 + \left(\frac{8}{Re_b} + \frac{1}{2} \left(1 + \frac{3.315}{\sqrt{Re_b}} \right) \right)^{-1} \right]$	$C_D = \frac{16}{Re_b} \left[1 + \frac{3}{2} \left(\left(\frac{12}{Re_b} \right)^n + 0.796^n \right)^{1/n} \right], n = 0.65$
	\bar{F}_L $C_L = 2.74\sqrt{Sr}$ $\times \left[Re_b^{-2} + \left(0.24\sqrt{Sr} \right)^4 \right]^{\frac{1}{4}}$	$C_L = 0.71\sqrt{Sr}$ $\times \left[\left(\frac{1.15J(\varepsilon)}{\sqrt{Re_b}} \right)^2 + \left(\frac{3\sqrt{2Sr}}{8} \right)^2 \right]^{\frac{1}{2}}$	$C_L = 2.74\sqrt{Sr}$ $\times \left[Re_b^{-2} + \left(0.24\sqrt{Sr} \right)^4 \right]^{\frac{1}{4}}$
	\bar{F}_{AM} $\frac{3}{2}\rho_L V_b \frac{\dot{R}}{R} U_L \bar{e_x} - \rho_L \pi R^2 \left(\frac{3}{2}\dot{R}^2 + R\ddot{R} \right)$ $\times (\cos(\theta_i) \bar{e_y} + \sin(\theta_i) \bar{e_x}), \theta_i = 10^\circ$	$2\pi\rho_L R^2 \dot{R} U_L \bar{e_x} - \rho_L \pi R^2 \left(\frac{3}{2}\dot{R}^2 + R\ddot{R} \right)$ $\times (\cos(\theta_i) \bar{e_y} + \sin(\theta_i) \bar{e_x}), \theta_i = 45^\circ$	$-\rho_L \pi R^2 \left(\frac{3}{2}\dot{R}^2 + R\ddot{R} \right)$ $\times (\cos(\theta_i) \bar{e_y} + \sin(\theta_i) \bar{e_x}), \theta_i = 10^\circ$
	Mazzocco (2018) [22]	Ren (2020) [28]	Present model
Forces	\bar{F}_B $\frac{4}{3}\pi R^3 (\rho_L - \rho_V) \bar{g}$	$\frac{4}{3}\pi R^3 (\rho_L - \rho_V) \bar{g}$	$\frac{4}{3}\pi R^3 (\rho_L - \rho_V) \bar{g}$
	\bar{F}_C Eq. ??, $r_w = R/15$	Eq. ??, $r_w = 0.2R$	Eq. ??, $r_w = R \sin(\theta)$
	\bar{F}_{CP} Eq. 5.16, $R_c = 5R$	Eq. 5.16, $R_c = 5R$	Eq. 5.16, $R_c = R$
	\bar{F}_D $C_D = 1.13 \frac{24}{Re_b} \left(1 + 0.104 Re_b^{0.753} \right)$	$C_D = \frac{16}{Re_b} \left[1 + \frac{3}{2} \left(\left(\frac{12}{Re_b} \right)^n + 0.796^n \right)^{1/n} \right], n = 0.65$	$C_D = C_{D,U} (1 + \Delta C_D)$ $C_{D,U}$ by Eq. 5.29, ΔC_D by Eq. 5.31
	\bar{F}_L $C_L = 2.61$	$C_L = 2.74\sqrt{Sr}$ $\times \left[Re_b^{-2} + \left(0.24\sqrt{Sr} \right)^4 \right]^{\frac{1}{4}}$	C_L by Shi et al. [30]
	\bar{F}_{AM} $-\frac{1}{4}\pi\rho_L K^4 (\cos(\theta_i) \bar{e_y} + \sin(\theta_i) \bar{e_x}),$ $\sin(\theta_i) = 0.2, \cos(\theta_i) = 1$	$-\rho_L \pi R^2 \left(\frac{3}{2}\dot{R}^2 + R\ddot{R} \right)$ $\times (\cos(\theta_i) \bar{e_y} + \sin(\theta_i) \bar{e_x}), \theta_i = 15^\circ$	$\frac{F_{AM,x}}{\rho_L V_b} = C_{AM,x} \left[3 \frac{\dot{R}}{R} U_{rel} - \frac{\partial U_b}{\partial t} \right],$ $C_{AM,x} = 0.636, F_{AM,y}$ by Eq. 5.58.

Table 5.3: Summary of different force-balance mechanistic approaches.

5.2.11 Liquid Velocity

To compute the liquid velocity and shear rate at bubble center height, we use the wall law of Reichardt [27], which describes the velocity profile from the viscous sublayer to the logarithmic region.

$$U_L^+ = \frac{1}{\kappa} \ln(1 + \kappa y^+) + c \left(1 - e^{-y^+/\chi} + \frac{y^+}{\chi} e^{-y^+/3} \right) \quad (5.107)$$

$$U_L = U_L^+ U_\tau$$

with $\kappa = 0.41$, $\chi = 11$ and $c = 7.8$.

$$\frac{\partial U_L^+}{\partial y^+} = \frac{1}{1 + \kappa y^+} + \frac{c}{\chi} \left(e^{-y^+/\chi} + \left(1 - \frac{y^+}{3} \right) e^{-y^+/3} \right) \quad (5.108)$$

$$\frac{\partial U_L}{\partial y} = \gamma = \frac{U_\tau^2}{\nu_L} \frac{\partial U_L^+}{\partial y^+}$$

The friction velocity is computed using Mac Adams correlation [23].

$$U_\tau = \sqrt{\frac{\tau_w}{\nu_L}} \quad (5.109)$$

$$\tau_w = 0.018 \text{ Re}_{D_h}^{-0.182} \frac{G_L^2}{\rho_L} \quad (5.110)$$

5.3 DEPARTURE BY SLIDING

5.3.1 Non-Dimensional Analysis

Now that the force balance has been established, we can write it parallel to the wall before bubble departure by sliding *i.e.* $U_b = \frac{\partial U_b}{\partial t} = 0$.

$$\begin{aligned} -\pi R \sigma f_{C,x} + \frac{4}{3} \pi R^3 (\rho_L - \rho_V) g + \frac{1}{2} C_D \rho_L \pi R^2 U_L^2 \\ + \frac{4}{3} \pi R^3 \rho_L 3 C_{AM,x} \frac{\dot{R}}{R} U_L = 0 \end{aligned} \quad (5.111)$$

$$f_{C,x} = 2.5 \frac{d\theta}{(\pi/2)^2 - d\theta^2} \sin(\theta)^2 \cos(d\theta) \quad (5.112)$$

with $f_{C,x} \rightarrow 0$ if $d\theta \rightarrow 0$.

We can note that the departure by sliding is promoted by the Buoyancy, the Drag and the Added Mass forces. Only the Capillary force keeps the bubble attached to its nucleation site, which will be discussed later.

Re-writing Eq. 5.113 in non-dimensional form by dividing the LHS by the Added Mass force yields:

$$-\frac{1}{2} \frac{f_{C,x}}{K^2 C_{AM,x}} \frac{1}{Ca} \frac{Pr_L}{Ja_w^2} + \frac{1}{3} \frac{1}{K^2 C_{AM,x}} \frac{Re_b}{Fr} \frac{Pr_L}{Ja_w^2} + \frac{1}{8} \frac{C_D}{K^2 C_{AM,x}} \frac{Re_b}{Ja_w^2} \frac{Pr_L}{Ja_w^2} + 1 = 0 \quad (5.113)$$

where we have the following non-dimensional numbers:

$$\begin{aligned} Re_b &= \frac{2 R U_L}{\nu_L} ; Fr = \frac{\rho_L U_L^2}{(\rho_L - \rho_V) g R} ; We = \frac{\rho_L U_L^2 R}{\sigma} ; Eo = \frac{(\rho_L - \rho_V) g R^2}{\sigma} ; \\ Ja_w &= \frac{(T_w - T_{sat}) \rho_L c_{PL}}{\rho_V h_{LV}} ; Pr_L = \frac{\nu_L}{\eta_L} ; \frac{\dot{R}}{U_L} = \frac{K^2 Ja_w^2}{Pr_L Re_b} ; Ca = \frac{\mu_L U_L}{\sigma} \end{aligned}$$

Eq. 5.115 exhibits terms that can be used to compare the magnitude of each detaching forces. We can obtain the following conditions:

$$\text{Added Mass greater than Drag if: } \frac{Ja_w^2}{Pr_L} > \frac{1}{8} \frac{C_D}{C_{AM,x}} \frac{1}{K^2} Re_b \quad (5.114)$$

$$\text{Added Mass greater than Buoyancy if: } \frac{Ja_w^2}{Pr_L} > \frac{1}{3} \frac{1}{C_{AM,x} K^2} \frac{Re_b}{Fr} \quad (5.115)$$

$$\text{Drag greater than Buoyancy if: } Re_b > \frac{16}{3} \frac{1}{C_D} \frac{Eo}{Ca} = Re_c \quad (5.116)$$

Those boundaries can be plotted on a $(Ja_w^2/Pr ; Re_b)$ map for a given fluid and bubble diameter D . An example of such a map is presented on Figure 5.7. This allows to visualize the operating conditions under which each of the detaching forces will be dominant. Logically, Buoyancy dominates for low Re_b regimes contrary to Drag. Added Mass dominates when values of Ja_w^2/Pr_L are high *i.e.* when bubble grows rapidly.

5.3.1.1 Influence of Pressure

On Figure 5.8a, we draw the dominance map for 3 different pressures and associated orders of magnitude of bubble departure diameter [14].

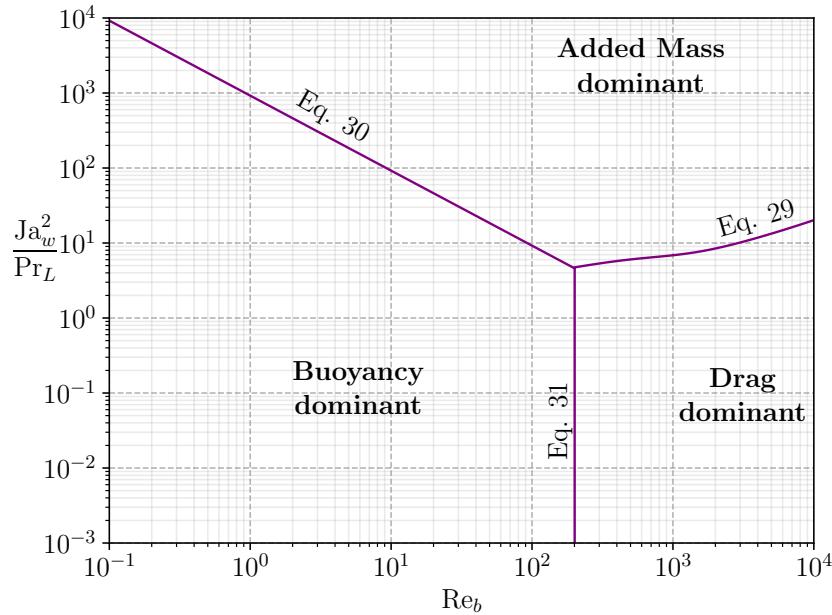


Figure 5.7: Dominance map regarding departure by sliding. Boundaries plotted for water at 1 bar and $D_d = 0.5\text{mm}$. ($K = 2$)

The impact of pressure is mostly seen through the decrease of bubble departure diameter. As pressure increases, Buoyancy force decreases while Drag and Added Mass forces display much larger dominance zones. The competition between those two terms mainly relies on the competition between liquid flow velocity and wall superheat or heat flux.

5.3.1.2 Comparison between Fluids

On Figure 5.8b, we compare the dominance zones for R12 at 26 bar and water at 155 bar. Moderately pressurized R12 (10 to 30 bar) has often been used as a simulating fluid to mimic water in PWR since it has the same density ratio and Weber number for instance.

Assuming that the conservation of Weber and Boiling numbers may lead to similar bubble departure diameters, we can observe that the boundaries between the two fluids are very close. This qualitatively indicates that R12 shall present bubble departure by sliding mechanisms similar to what happens in PWR, which could comfort the confidence one may have in extrapolating the observations done using the simulating fluid to industrial applications.


5.3.2 Application to Experimental Data

Now we want to apply this non-dimensional approach to experimental measurement in order to determine the actual bubble departure by sliding regimes. We rely on 7 experiments in which bubble departure diameters in vertical flow boiling were measured. The operating conditions are gathered in Table 5.4. If the value of ΔT_w is not available in the considered data-set, we estimate it ΔT_w using Frost & Dzakowic correlation [8].


$$\Delta T_w = Pr_{L,sat} \sqrt{\frac{8\sigma\phi_w T_{sat}}{\lambda_L \rho_V h_{LV}}} \quad (5.117)$$

Comparisons with bubble growth profile from Kossolapov [15] showed that values of K respectively around 7 and 15 were needed to match experimental measurements at 20 bar and 40 bar. This means Eq. 5.119 probably underestimates the wall superheat on those cases. We will thus further adopt a corrective factor of 7 at 20 bar and 15 at 40 bar to use more realistic values of K .

To place experimental measurements on the non-dimensional map, we need a bubble detachment diameter value D_d to plot the dominance zones. Since measured D_d vary significantly in each experiment, we draw the boundaries for the maximum and minimum values of D_d as shown on Figure 5.9a. If the considered

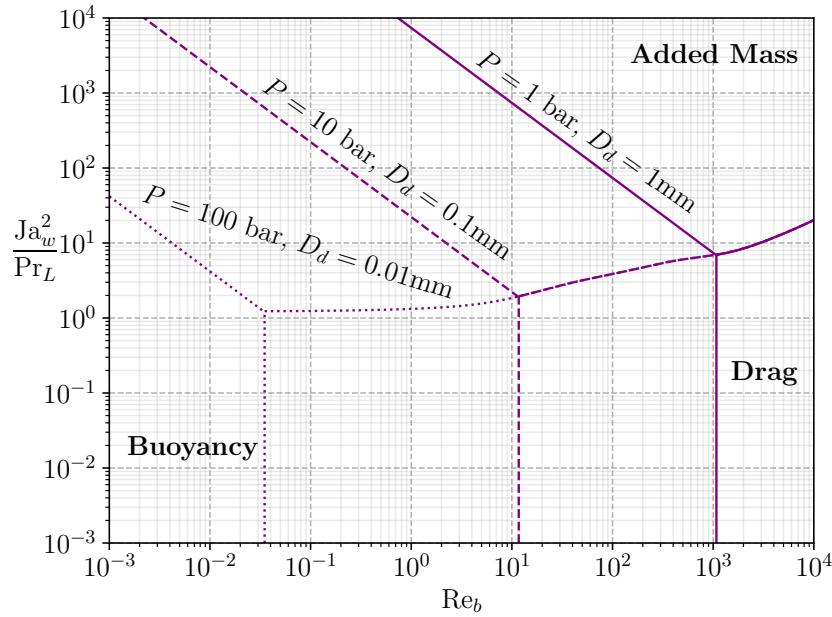

(a) Dominance map plotted for water at different pressures and bubble departure diameters. ($K = 2$)

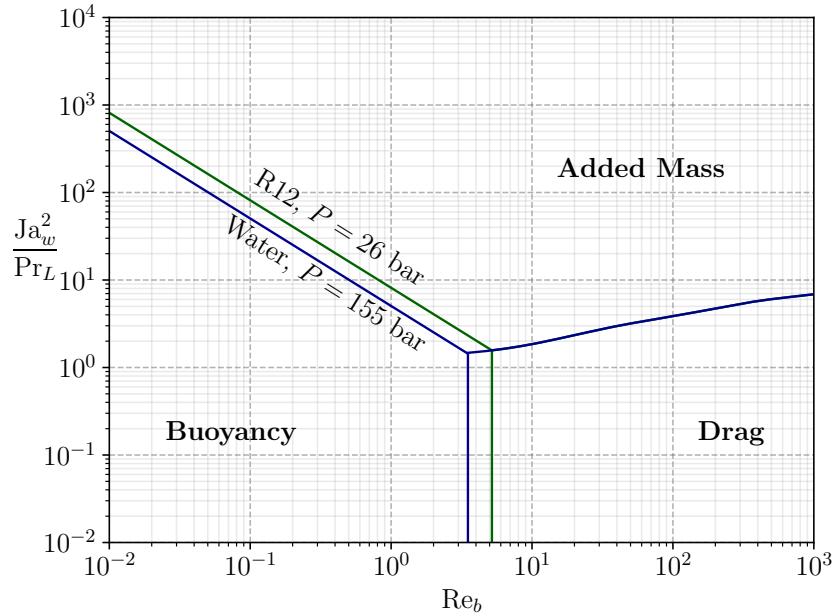

(b) Dominance map for R12 as simulating fluid for PWR. $D_d = 0.05\text{mm}$ is chosen according to R12 measurements from Garnier *et al.* [9] who observed bubbles of $\sim 0.1\text{mm}$ diameter after lift-off. ($K = 2$)

Figure 5.8: Examples of qualitative analysis using the non-dimensional regime map

data covers different pressures, boundaries for each pressure are plotted to exhibit its impact (Figures 5.9d, 5.9e and 5.9f). We chose a value of $K = 1$ to draw the boundaries.

The Figure 5.9 shows that for most of the low pressure experiments, the detaching forces are the Added Mass and the Buoyancy. Smaller bubbles are mainly detached under the effect of the Added Mass force (Figures 5.9c, 5.9d and 5.9e). When the bubbles detach at higher diameters, the impact of the Buoyancy force naturally increases and is comparable to the Added Mass force (Figures 5.9a and 5.9b).

When the pressure increases, we observe that the experimental measurements gradually move towards the Drag dominant zone as seen on Figures 5.9e and 5.9f. This main difference in the dynamic regime when bubble departs by sliding arises from multiple effects:

- The decrease of ρ_L/ρ_V with pressure, thus reducing Ja_w and the impact of the detaching Added Mass term ;

Author	Fluid	D_h [mm]	P [bar]	G_L [kg/m ² /s]	ΔT_L [K]	ϕ_w [kW/m ²]	ΔT_w [K]	D_d [mm] (N_{mes})
Thorncroft [36] (1998)	FC-87	12.7	N.A.	0 - 319	0.99 - 3.27	2.83 - 11.8	0.54 - 6.89	0.094 - 0.237 (10)
Maity [21] (2000)	Water	20	1.01	0 - 239.6	0.3 - 0.7	N.A.	5 - 5.9	0.788 - 1.71 (9)
Chen [3] (2012)	Water	3.8	1.2 - 3.35	214 - 702	14.5 - 30.3	83.6 - 334	N.A.	0.549 - 2.255 (22)
Sugrue [33] (2014)	Water	16.6	1.01	250 - 400	10 - 20	50 - 100	2 - 6	0.229 - 0.391 (16)
Guan [11] (2014)	Water	9	1.01	87.3 - 319.2	8.5 - 10.5	68.2 - 104	4.5 - 8.5	0.62 - 1.85 (12)
Ren [28] (2020)	Water	3.8	2 - 5.5	488.4 - 1654	28.7 - 51	160.7 - 643.2	N.A.	0.045 - 0.111 (42)
Kossolapov [15] (2021)	Water	11.8	19.9 - 39.8	500 - 1500	10	178 - 613	N.A.	0.01 - 0.047 (11)

Table 5.4: Bubble departure diameters data sets in vertical flow boiling

- The higher liquid mass fluxes in Kossolapov experiments, increasing the impact of the Drag ;
- The decrease of D_d with pressure, reducing the magnitude of Buoyancy.

However, we see that some measurements lie close to the Added Mass / Drag boundary (Figure 5.9f), indicating that the Added Mass force still plays a significant role for bubble detachment. This means that regardless of the operating pressure, the detaching term associated to the coupling between bubble growth and outer liquid flow should not be neglected in the force balance (Eq. 5.57).

5.3.3 Departure Diameter Prediction

5.3.3.1 About the Use of Empiricism

As previously mentioned, the case of bubble detachment in vertical flow boiling is particular since only one force maintains the bubble attached to its nucleation site: the Capillary force (Eq. ??). Its expression depends on the contact angle θ , the angle half-hysteresis $d\theta$ and the bubble foot radius r_w (or ratio to bubble diameter r_w/R) and is thus very sensitive to those values. Paradoxically, those terms are among the least precisely known due to the difficulty of measurement and associated uncertainties. For instance, conducting precise evaluations of the contact angle near the bubble base through optical techniques can be challenging because of the strong temperature gradients close to the heated surface.

Consequently, empirical choices have to be made in order to set a value to those parameters, often by relying on data-fitting or approximate measurements in other conditions. For instance, contact angles are often taken as arbitrary average values [28] or measurements in room conditions [33] and applied over a whole set of experiments. This is questionable since contact angle is unlikely to remain unchanged over different operating conditions and surfaces with varying roughness and properties [32].

However, no better information except those given by the authors can be used to evaluate the Capillary force since no generic model exist to compute the contact angle and hysteresis. In this work, admitting a significant uncertainty (typically 5°, as in Guan [11]), we will use the following values for the contact angles :

- $\theta_u = 25.3^\circ$ and $\theta_d = 6.6^\circ$ for Thorncroft data (measured values for FC-87 on nichrome [37]) ;
- $\theta_u = 50^\circ$ and $\theta_d = 40^\circ$ for Maity data (measured average contact angles for each bubble during its lifetime [21]) ;
- $\theta_u = 130^\circ$ and $\theta_d = 65^\circ$ for Chen data (chosen values in their study following measurements for water on stainless steel at high temperature by Kandlikar *et al.* [12]) ;
- $\theta_u = 91^\circ$ and $\theta_d = 8^\circ$ for Sugrue data (measured values at room temperature [35]) ;

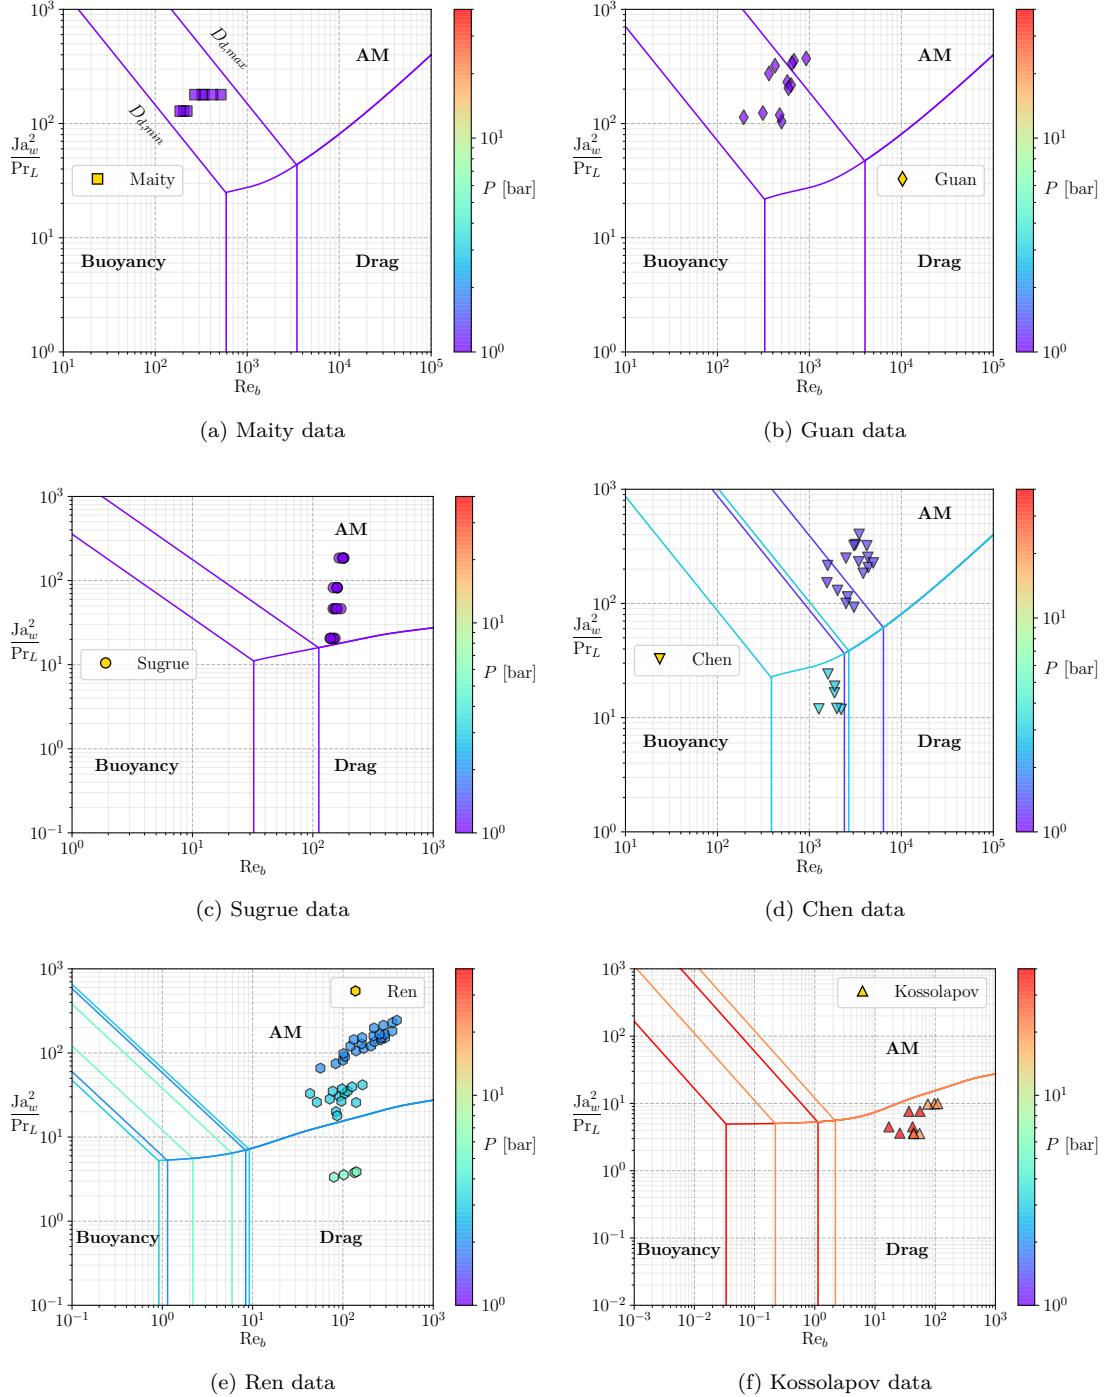


Figure 5.9: Dominance maps for each water data sets from Table 5.4.

- $\theta_u = 75^\circ$ and $\theta_d = 30^\circ$ for Guan data (measured average value through experimental visualizations [11]) ;
- $\theta_u = 45^\circ$ and $\theta_d = 36^\circ$ for Ren data (chosen values in their study [28]) ;
- $\theta = 80^\circ$ for Kossolapov data (typical contact angle for water on ITO [15]) and $d\theta = 1^\circ$ assuming that the very small bubbles at high pressure are nearly not tilted.

Similarly, the bubble foot radius r_w is often empirically assumed to be either constant [13] proportional to the bubble radius [22, 33] or to follow a linear or logarithmic law of R [11, 45]. That is why we chose to use the truncated sphere hypothesis (Eq. 5.14) to compute r_w using R and θ .

Finally, we would like to acknowledge that the empiricism to evaluate those parameters represents one of the biggest flaws of the force-balance approach. Indeed, such a model aims to detect small sign changes

in a sum of a few μN of forces that are decades larger as pointed out by Bucci *et al.* [1]. Mechanistic models are thus strongly sensitive to any extra parameter included in the modeling of the forces.

5.3.3.2 Growth Constant Values

Since the value $K \approx 2$ represents an upper bound for the growth constant in a quiescent uniformly superheated liquid [26] and that values below 1 can be a better fit for bubble growth in subcooled flow boiling (Figure 5.13), we propose a simple law that includes an influence of the liquid subcooling and velocity:

$$K = \frac{2}{(1 + \text{Re}_\tau)^{0.3} (1 + \text{Ja}_L)} \quad (5.118)$$

where $\text{Re}_\tau = U_\tau L_c / \nu_L$.

This expression naturally degenerates to $K = 2$ for quiescent saturated liquid and yields values between 0.15 and 1.99 for the cases of Table 5.4.

5.3.3.3 Predictions

We consider the non-dimensional force balance before departure.

$$C_{AM,x} K^2 \frac{\text{Ja}_w^2}{\text{Pr}_L} + \frac{1}{3} \frac{\text{Re}_b}{\text{Fr}} + \frac{1}{8} C_D \text{Re}_b = \frac{1}{2} \frac{f_{C,x}}{\text{Ca}} \quad (5.119)$$

Since we only have the capillary term hindering departure as a first approach, we can suppose that departure is reached when:

$$C_{AM,x} K^2 \frac{\text{Ja}_w^2}{\text{Pr}_L} + \frac{1}{3} \frac{\text{Re}_b}{\text{Fr}} + \frac{1}{8} C_D \text{Re}_b > \frac{1}{2} \frac{f_{C,x}}{\text{Ca}} \quad (5.120)$$

which is similar to considering that the other forces overcome the Capillary force.

On Figure 5.10, we show the predictions obtained with the proposed modeling and those obtained with Mazzocco's recent model [22].


The model have an acceptable trend on some experimental sets, but strong overestimation occur on the cases of Sugrue. Moreover, we observe significant underestimations on the data of Ren at 2 bar and Thorncroft.

Mazzocco's model provides a good accuracy on the data of Sugrue, Guan, Maity and Ren (2 bar). However, we observe very large overestimation over Thorncroft's measurements and significant underestimation on Chen, Ren (3 and 5 bar) and Kossolapov measurements.


5.3.4 Discussion and accounting for parameters uncertainties

The aforementioned errors observed for the proposed model may originate from various reasons:

- The contact angle proposed for Sugrue cases is high with a large hysteresis, suggesting strongly deformed and flattened bubbles under the truncated sphere hypothesis. Based on images from Sugrue's work [34], a comparison between a real bubble with the assumed shape is presented on Figure 5.11. This shows a huge difference which indicates that the contact angle and hysteresis values may be overestimated. Using the available images, the ratio of the bubble diameter to the apparent bubble foot would lead to an average contact angle $\theta \approx 20^\circ$ for a truncated sphere. Noting that a larger inclination is observed for the bubbles under higher mass fluxes leads us to suppose a value $d\theta \approx 15^\circ$. This represent a similar inclination to contact angle ratio ($d\theta/\theta$) compared to the initially proposed values. The resulting new shape is also presented on Figure 5.11 and seem to better represent the actual bubble.
- For cases where limited under and overestimation is observed, we may allow to account for an uncertainty as high as 5° for the average contact angle θ and half-hysteresis $d\theta$.
- As mentioned earlier, applying the same contact angle and hysteresis over a wide range of measurements is a strong assumption, especially for cases where different pressures and bubble diameter variations are observed. Thus, we may slightly distinguish the applied values of θ and $d\theta$ for different pressures within a given experiment, keeping a change no larger than 5° .

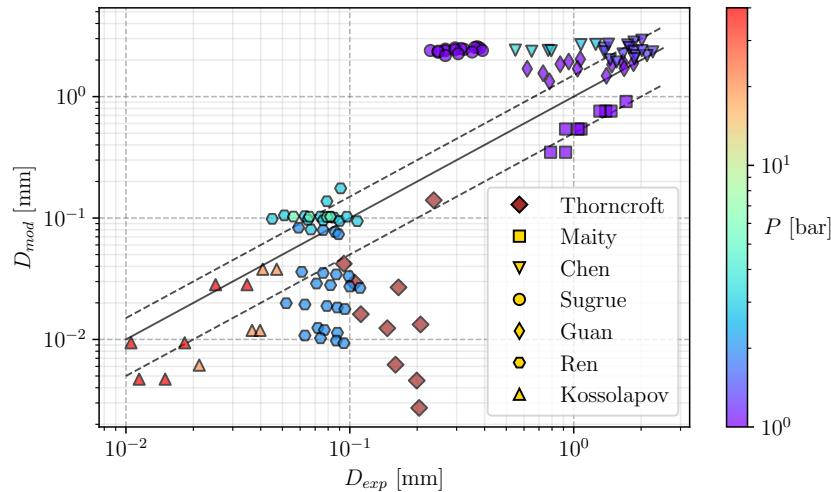

(a) Proposed model without accounting for contact angle uncertainties

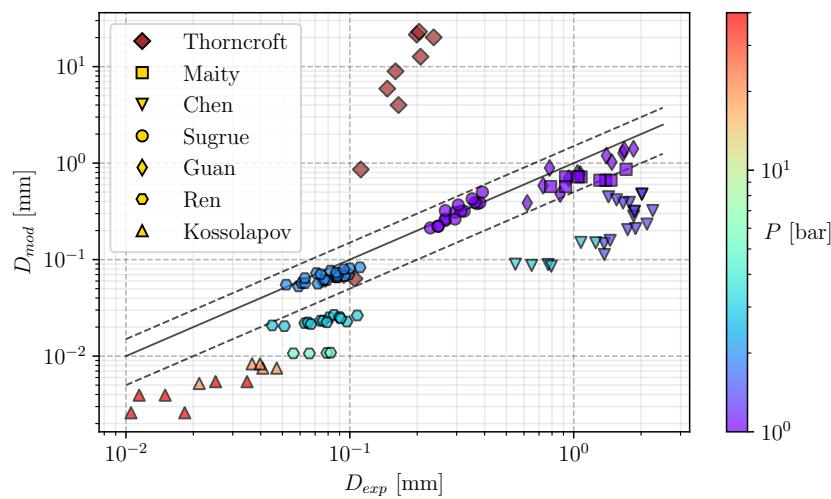

(b) Mazzocco model

Figure 5.10: Predicted bubble departure diameters

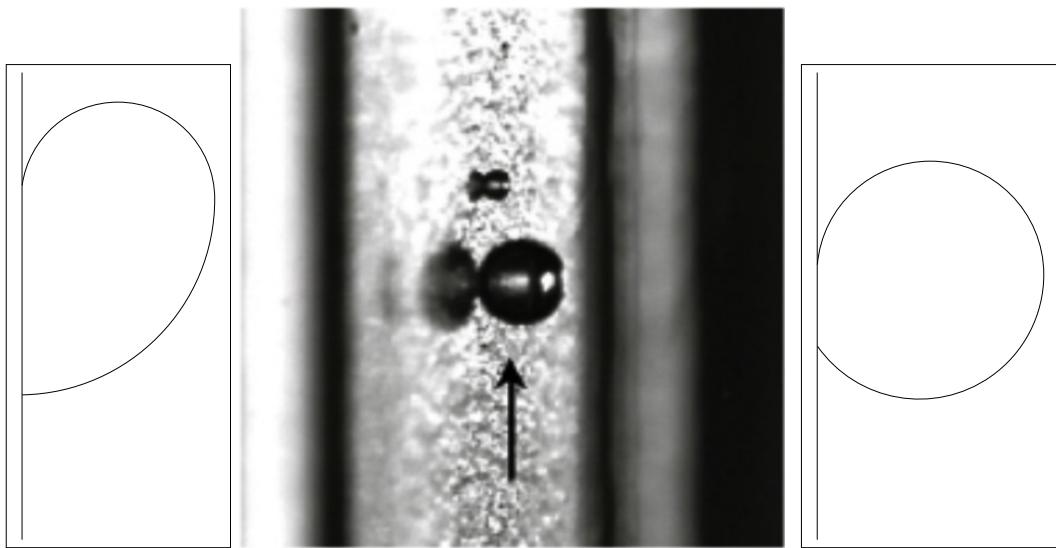


Figure 5.11: Initially assumed, real and reassessed bubble shape for Sugrue cases (picture adapted from [34]).

- Kossolapov cases at $G_L = 500 \text{ kg/m}^2/\text{s}$ are better predicted. Cases under higher mass fluxes (1000 and 1500 $\text{kg/m}^2/\text{s}$) present underestimation that could come from the value of $d\theta$. At such mass


fluxes, the Weber number can be up to a decade higher and bubbles may thus accept a larger inclination before detachment.

- Cases of Ren and Chen rely on chosen values for θ and $d\theta$ and not on measured ones. They are therefore subject to strong uncertainties. We can note that the values for Chen cases are significantly high.
- The proposed growth law is still rather simple and may miss significant information, especially regarding bubble size and fluid properties such as the Prandtl number.
- Errors on Thorncroft cases may be linked to uncertainties regarding FC-87 properties. Indeed, we use the values given at $T_{sat} = 29^\circ$ at 1 bar in his work [36]. However, the saturation temperature indicated in his test matrix is close to 40° which means that measurements were conducted at a higher pressure, for which we do not have FC-87 properties.

Therefore, using modified values of θ and $d\theta$ among experimental data sets with no more than a 5° change (except for Sugrue cases reassessed values) leads to predictions on Figure 5.12.

Author	θ [°]	$d\theta$ [°]
Thorncroft	20	14
Maity	45	10
Chen	92.5	27.5
Sugrue	20	15
Guan	47.5	17.5
Ren (2 bar)	45.5	8.5
Ren (3 bar)	37.5	3.5
Ren (5 bar)	35.5	3.5
Koss. (500 kg/m ² /s)	80	0.5
Koss. (1000 kg/m ² /s)	80	1
Koss. (1500 kg/m ² /s)	80	1.5

(a) Modified contact angle and hysteresis values.

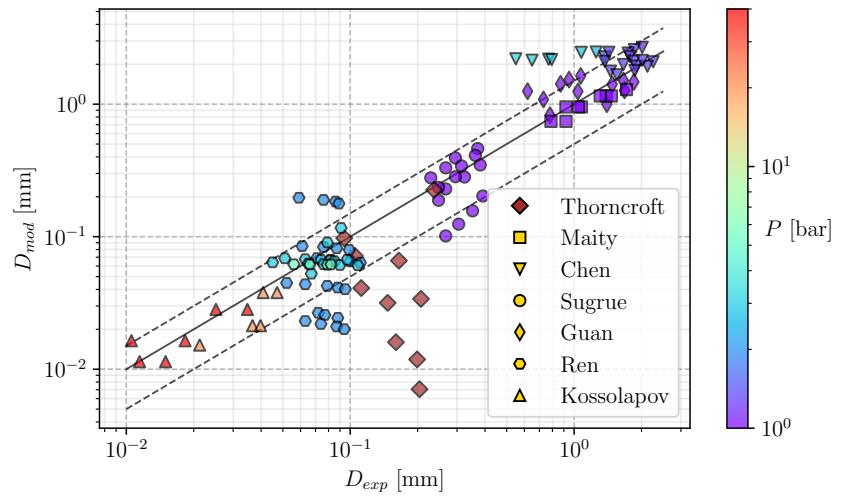

(b) Predicted bubble departure diameters.

Figure 5.12: Proposed model performance while accounting for contact angle uncertainties

The predictive capacity of the model is significantly enhanced, especially on Sugrue's cases which tends to indicate that the contact angle reassessment was justified under the truncated sphere hypothesis. Table 5.5 summarizes the average errors obtained with the present model and Mazzocco's one.

The proposed model achieves an overall better predictive capability even when excluding measurements from Thorncroft on which Mazzocco's model strongly overestimates the departure diameter. Mazzocco's model is still better on Sugrue and Guan cases since it was built and validated using those measurements. It better predicts results from Ren but only for the 2 bar cases while it underestimates the departure diameter for higher pressures. Those results are a coupled effect of his optimized growth law along with the imposed value of r_w/R and the use of the inclination angle to hinder departure as mentioned in 5.2.7. The approach demonstrated the importance and the strong influence of the contact angle and hysteresis. A small change of their value (staying in the uncertainty range of 5°) allowed to reach reasonable predictions over a large range of bubble departure diameters with the model of this paper, using a reduced number of empirical parameters.

Author	Mazzocco	Present model
Thorncroft	4874%	60.6%
Maity	39.7%	13.8%
Chen	83.8%	69.9%
Sugrue	9.73%	26.22%
Guan	25.5%	36.8%
Ren	40.32%	44.1%
Kossolapov	78.3%	24.1%
Total	442%	43%
Total (without Thorncroft)	46.58%	41.4%

Table 5.5: Average relative error reached by the models.

5.4 SLIDING PHASE

5.4.1 Modeling

After departure, bubbles slide over a distance l_{sl} which scales the impact of the sliding phenomenon over the wall heat transfer. Achieving good prediction of bubble sliding velocity is then important if one wishes to correctly quantify its impact.

Following the force balance framework presented in Section ??, we can write Newton's second law parallel to the wall for the sliding bubble.

$$\rho_V \frac{d(V_b U_b)}{dt} = -\pi R \sigma f_{C,x} + \frac{4}{3} \pi R^3 (\rho_L - \rho_V) g + \frac{1}{2} C_D \rho_L \pi R^2 U_L^2 + \frac{4}{3} \pi R^3 \rho_L \left[3C_{AM,x} \frac{\dot{R}}{R} U_{rel} - C_{AM,x} \frac{dU_b}{dt} \right] \quad (5.121)$$

This equation can be re-written to express the bubble acceleration.

$$\left(1 + \frac{\rho_L}{\rho_V} C_{AM,x} \right) \frac{dU_b}{dt} = \left(\frac{\rho_L}{\rho_V} - 1 \right) g + \frac{3}{8} \frac{C_D}{R} \frac{\rho_L}{\rho_V} (U_L - U_b) |U_L - U_b| + 3 \frac{\dot{R}}{R} \left[C_{AM,x} \frac{\rho_L}{\rho_V} (U_L - U_b) - U_b \right] - \frac{3}{4} \frac{\sigma}{\rho_V} \frac{f_{C,x}}{R^2} \quad (5.122)$$

Then, we numerically solve this equation from the moment when $R \geq R_d$ using a first order Euler scheme for a duration close to the experimental sliding time. Next sections compare obtained results against low and high pressure data.

5.4.2 Low Pressure Sliding

Maity [21] provided simultaneous measurements of bubble radius and velocity over time for three liquid mass fluxes in vertical boiling. To assess the validity of Eq. 5.124, we modify the growth constant K in order to roughly match experimental radius measurements. The goal is to verify if the force balance allows a good prediction of bubble velocity provided a correct bubble growth. The contact angles were kept the same as in 5.3.3 since Maity provided average values over the bubble lifetime.

Results are displayed on Figure 5.13. The model seems to fairly good predict bubble sliding velocity for the 3 cases. The moment of departure is a bit underestimated as previously observed (Figure 5.10).

The biggest discrepancy is observed for the case at $G_L = 143.8 \text{ kg/m}^2/\text{s}$. The slope of the velocity profile is close to the experiments, but the bubble reaches a nearly constant acceleration too rapidly which yields an approximately constant overestimation of 0.1 m/s.

The $G_L = 239.6 \text{ kg/m}^2/\text{s}$ is well predicted regarding the velocity. However, the growth profile was difficult to match since measurements exhibit significant changes in growth regime after departure, which is probably due to the bubble being large enough to be impacted by the bulk flow. A finer model for bubble growth could be of interest here.

We can note that values of K between 0.5 and 1 were used to better fit the bubble radius time profile.

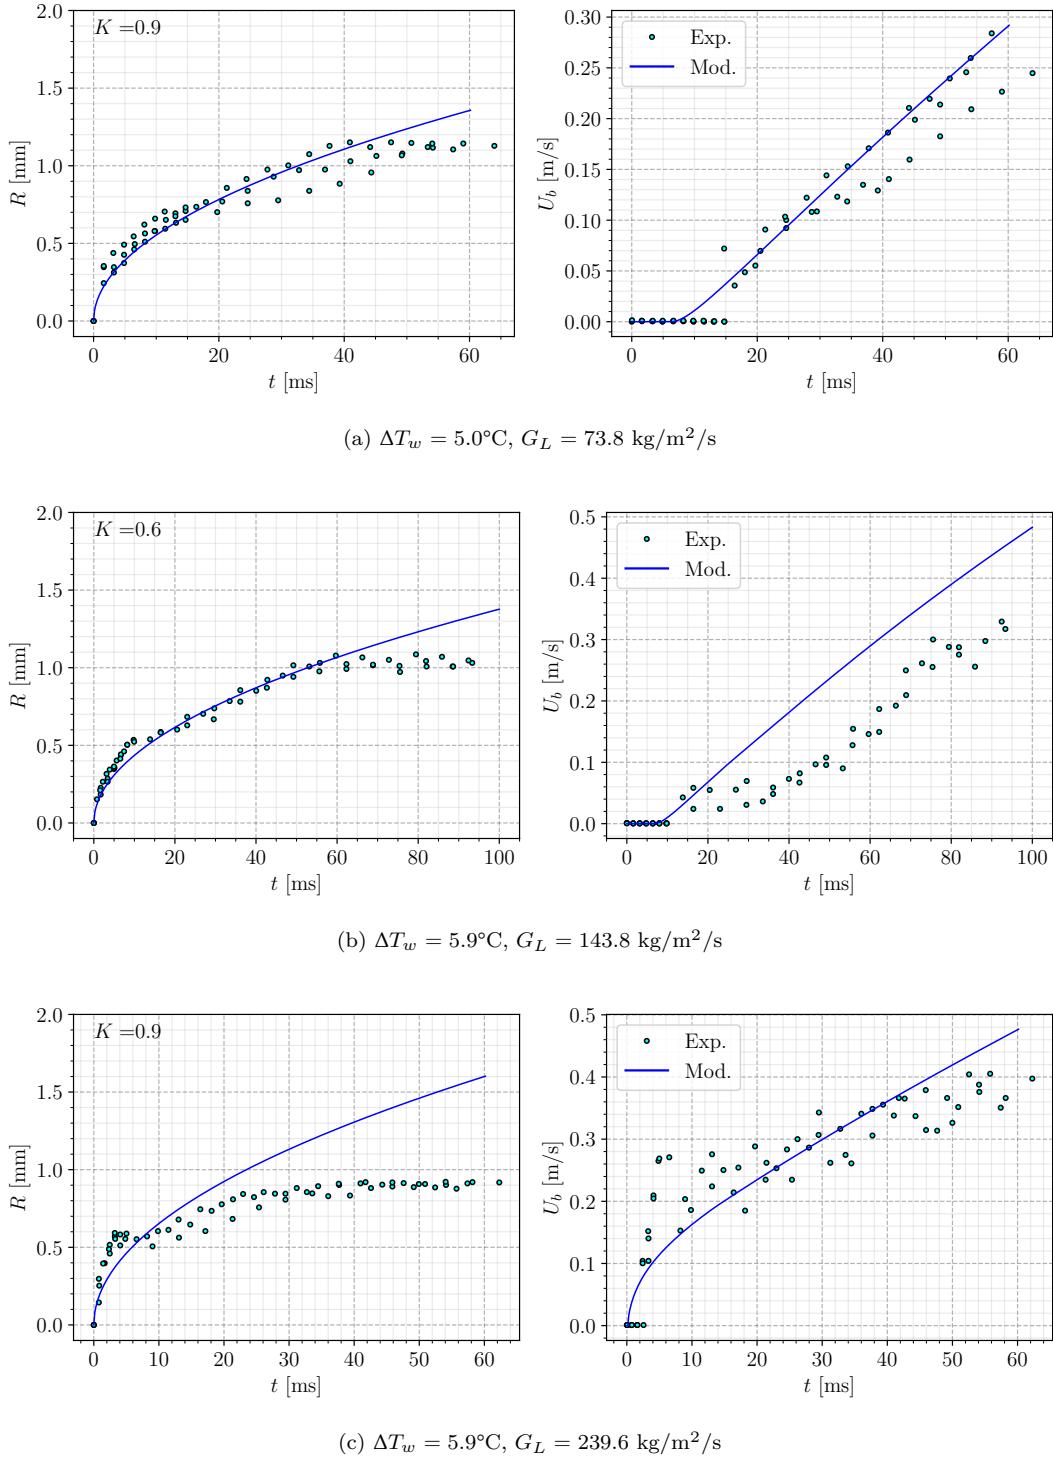


Figure 5.13: Bubble sliding velocity predictions on Maity cases

5.4.3 High Pressure Sliding

In his work, Kossolapov [15] conducted measurements of radius and sliding length over thousands of individual bubbles and then provided the associated statistical distributions. To compare our model with his measurements, we took the upper and lower bounds of R and l_{sl} over time and plotted the associated bands of measured values as shown on Figure 5.14 and 5.15.

Comparisons were done for cases at 20 bar and 40 bar and 3 different values of G_L . The value of $d\theta$ for the simulations was kept really small (2° at 20 bar and 0.5° at 40 bar) since bubble tilt is supposed to reduce during sliding because the relative velocity regarding the liquid flow is diminishing. Moreover, higher pressure means smaller bubbles that are even more unlikely to present a significant contact angle hysteresis. We also want to mention that neglecting the capillary term in Eq. 5.124 had a minor impact over the results except that the bubble accelerates a little bit faster.

The obtained results are in good agreement with the sliding length profile vs. time, which means bubble sliding velocity is well predicted for those cases.

Once the estimation of ΔT_w using Eq. 5.119 is corrected as mentioned in 5.3.2, values of K between 0.8 and 1.3 reasonably fits the bubble radius measurements.


5.5 CONCLUSION


In this work, we proposed a revisited force balance for a single bubble in a vertical upward boiling flow. This force balance was then used to study bubble departure by sliding and compared with bubble departure diameter and sliding velocity measurements. The main highlights of this study are:

- The use of a recent correlation to compute the Drag coefficient thanks to DNS results of Shi *et al.* [30].
- Reassessed computation of the Added Mass force and associated coefficients from the expression of the liquid kinetic energy proposed by Van Der Geld [10].
- A global force balance that avoids including extra empirical parameters. We notably get rid of empirical choices regarding bubble foot radius and do not include an arbitrary bubble inclination angle to create an Added Mass term hindering departure.
- A non dimensional approach leading to force regime maps to qualitatively determine the dynamic regime in which bubbles are departing from the nucleation site. It shows that the detaching Added Mass term due to external liquid flow is rarely negligible and often dominates at low pressure. Increasing pressure mostly leads to Drag dominant regimes.
- Bubble departure diameter predictions are achieved with a reasonable accuracy over a large range of measured values from 7 data sets. This could be reached by accepting an uncertainty of 5° for the values of the contact angle θ and half-hysteresis $d\theta$ to which the model was sensitive. This indicates that using fixed values for large data sets seems incorrect and that extra empiricism may not be needed if a proper modeling of those parameters was achieved.
- Bubble sliding velocity simulations showed a good agreement with experimental observations both at low and high pressure provided a correct bubble growth profile.

The limitations of the developed approach lie mainly in the simple and empirical law to estimate the growth constant K (Eq. 5.120). This could be enriched by a clean modeling of the bubble growth including effects such as condensation, microlayer evaporation and impact of the external liquid flow. Existing models rely on empirical values which thus reduces their general applicability outside of their validation range. For instance, studies conducted by Zhou [45] and Yoo [41] could be used by enriching their modeling with finer results to get rid of data fitting. DNS results such as those regarding bubble growth in a flowing superheated or subcooled liquid by Legendre *et al.* [17] could be of interest in that prospect.

Finally, the precise estimation of the contact angle and hysteresis remains a critical parameter to predict departure by sliding as demonstrated throughout this study. Local measurements of those values and their evolution with operating conditions would be a very valuable information in that regard. The article of Song & Fan [32] that sums up existing modeling and experimental measurements provides a good overview of the problem and identifies the associated challenges that are still to be tackled.

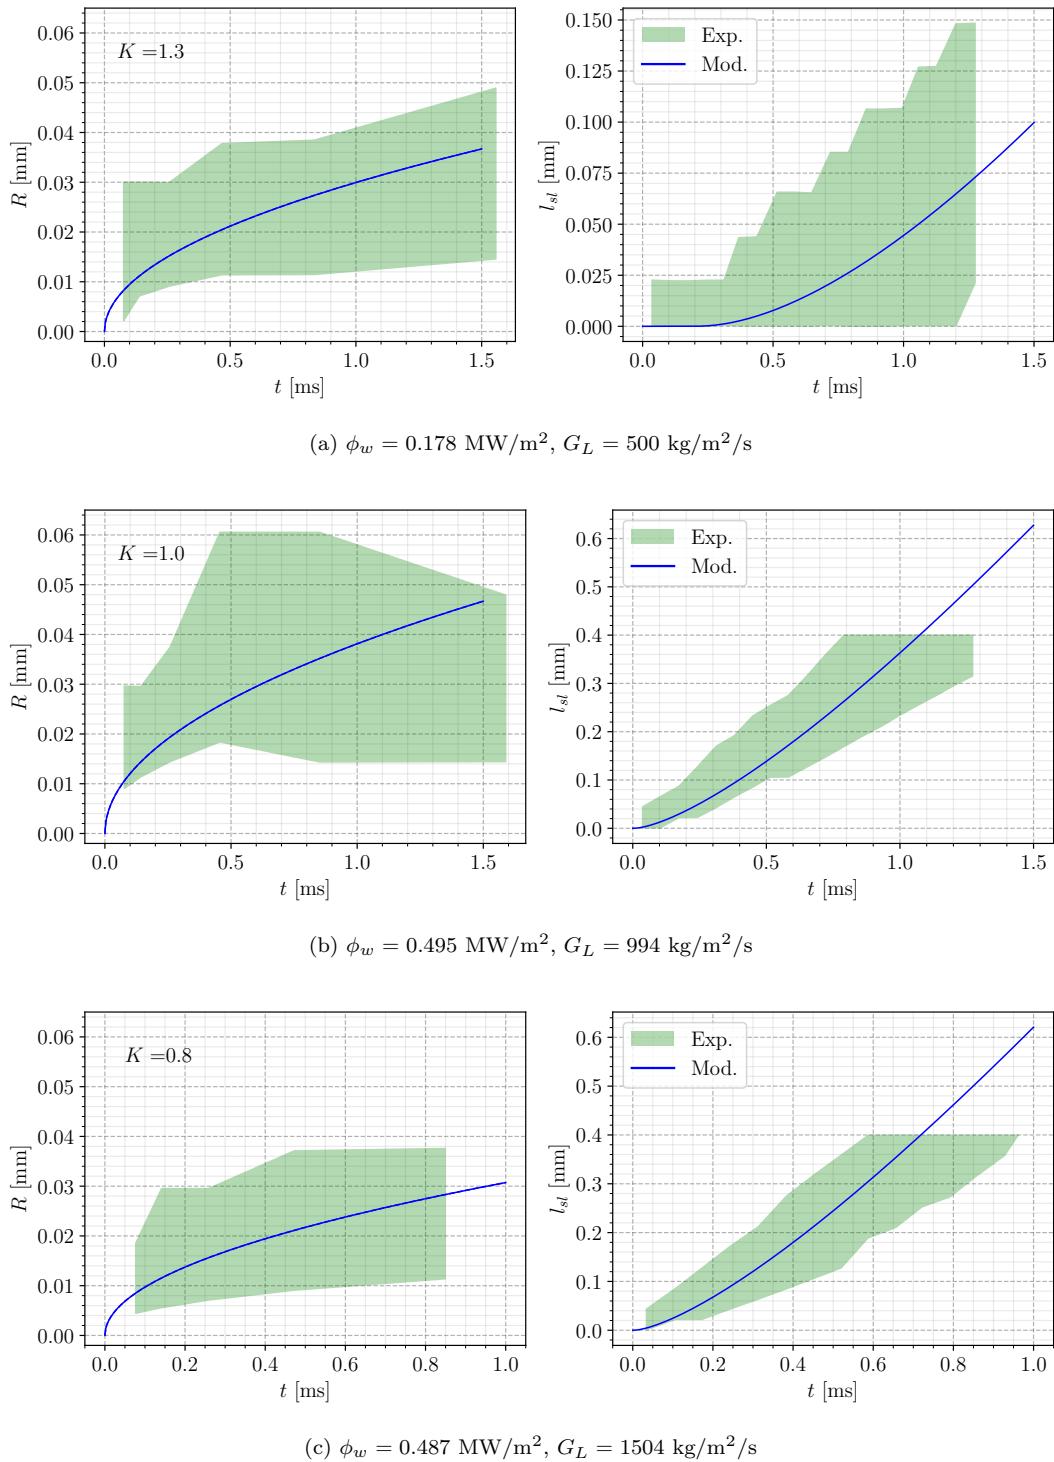Figure 5.14: Bubble sliding length predictions on Kossolapov cases - $P = 20 \text{ bar}$

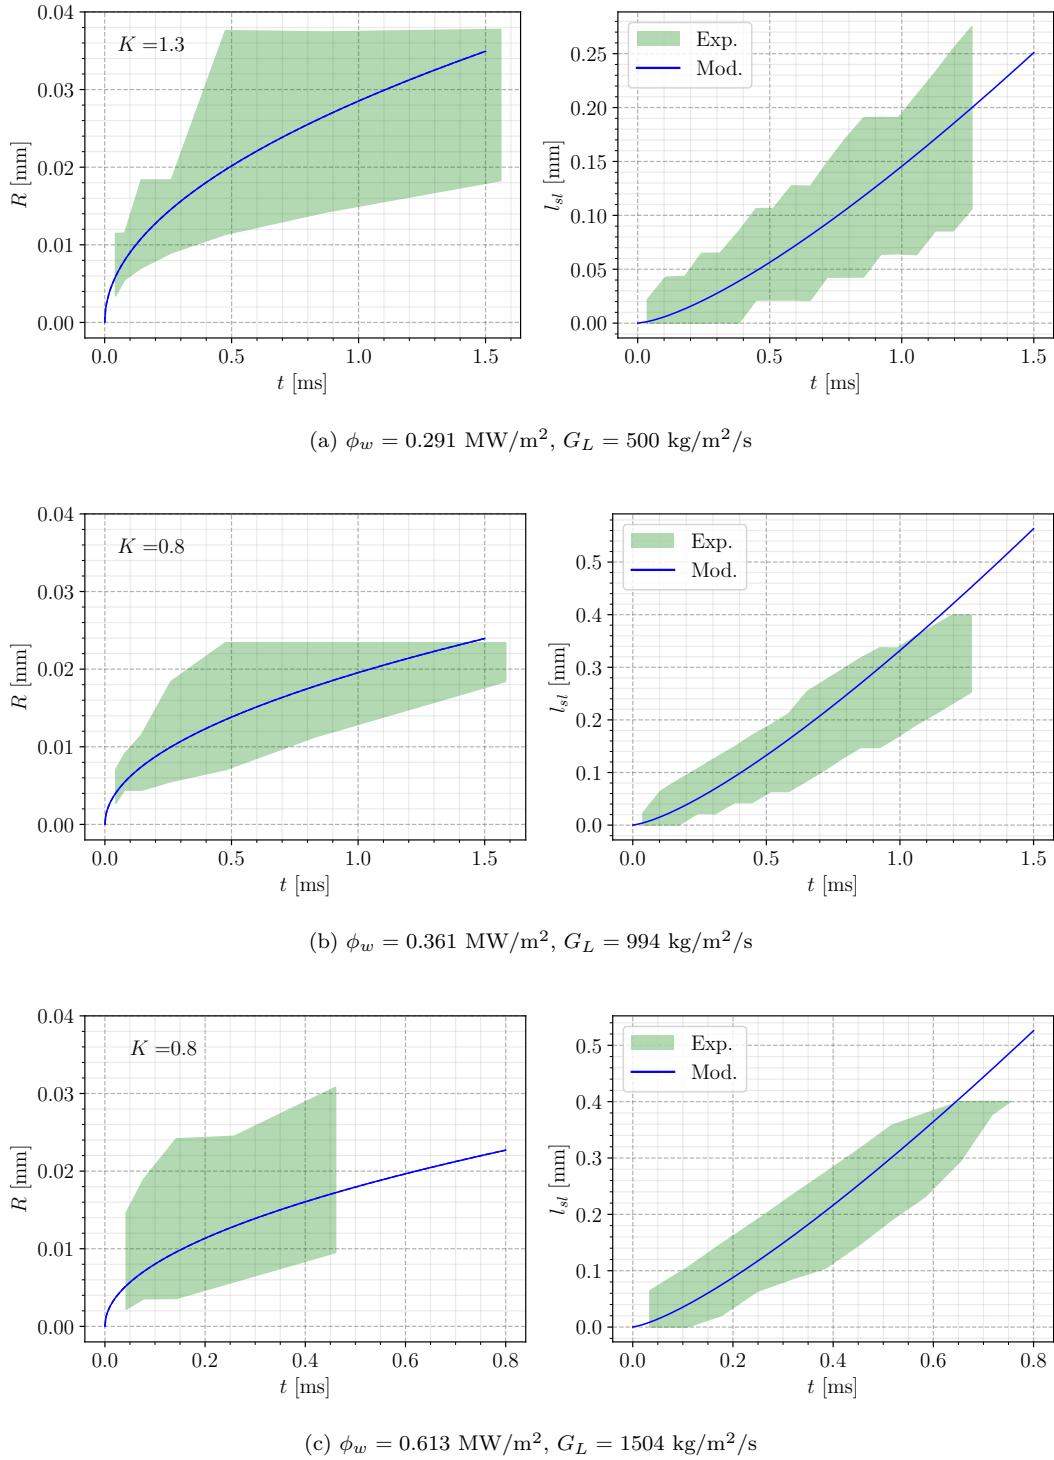Figure 5.15: Bubble sliding length predictions on Kossolapov cases - $P = 40$ bar

6

CLOSURE LAWS FOR THE HEAT FLUX PARTITIONING MODEL

6.1 SINGLE-PHASE HEAT TRANSFER COEFFICIENT

The choice of a proper correlation to compute the single-phase heat transfer coefficient is a first but inevitable step to build a HFP model. Indeed, if the single-phase convection term is badly computed, the resulting boiling model will fail to predict the wall temperature.

For instance, if the liquid convective HTC is overestimated, it would result in a delayed increase of the boiling and quenching heat fluxes which would in turn lead to an overprediction of the wall temperature. To assess existing correlations for the single-phase HTC, we will use wall temperature measurements extracted from experimental boiling curves for water where $T_w \leq T_{sat}$. They correspond to the single-phase part of the experimental data later used to assess the HFP model.

The chosen data are presented on Table 6.1.

Author	D_h [mm]	P [bar]	G_L [kg/m ² /s]	ΔT_L [K]	ϕ_w [MW/m ²]	$T_{sat} - T_w$ [K]	N_{mes} [-]
Kossolapov [15] (2021)	12	10.5	500 - 2000	10	0.1 - 0.6	0.22 - 9.5	12
Richenderfer [richenderfer_phd] (2018)	15	1 - 5	1000 - 2000	10-20	0.1 - 0.63	1 - 18.7	13
Jens-Lottes [jens_lottes_data] (1951)	5.74	137.9	2617.5	53.3 - 92.2	0.91 - 2.37	0.33 - 44.1	15
Kennel [kennel_phd] (1948)	4.3 - 13.2	2 - 6.2	284 - 10 577	11.1 - 83.3	0.035 - 1.89	0.35 - 69	52

Table 6.1: Experimental data range of wall temperature measurements from the single-phase part of boiling curves.

On Figure 6.1, we compare the results of wall temperature prediction in the single-phase region obtained with the correlation of Dittus-Boelter (Eq. ??) and Gnielinski (Eq. ??).

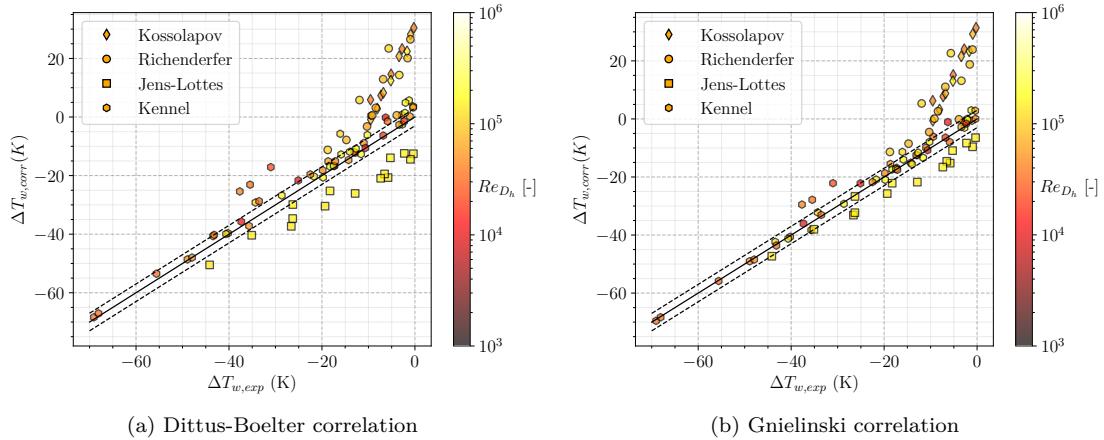


Figure 6.1: Predictive capability of wall temperature by single-phase heat transfer correlations. $\pm 3K$ error bars indicated.

The two correlations are of similar efficiency regarding wall temperature predictions over the considered data sets. They both have very good agreement with Kennel data and clear overestimations of ΔT_w on

Richenderfer and Kossolapov measurements. The slope difference compared to the parity implies that the correlations are predicting too small Nusselt numbers for those cases.

Regarding Jens-Lottes data, both model underestimate the wall temperatures, with better results achieved by Gnielinski correlation.

Remark : We tested different friction factor along with different values of wall roughness in the Gnielinski correlation and observed a negligible impact on the overall results. This allows to stay with a simple formulation for the friction coefficient.

The error obtained on Richenderfer and Kossolapov data can be explained by the definition of the HTC computed by Gnielinski correlation. Indeed, Gnielinski correlated a Nusselt number associated to a forced convection coefficient $h_{fc,Gniel}$ in the case of a internal flow with a completely heated wall.

However, only one side of the channel is heated in Richenderfer ans Kossolapov experiments. If S_{heat} denotes this actual heated surface, then Gnielinski correlation estimates the HTC for a surface $4S_{heat}$. With the same imposed total heat flux Φ_w and bulk liquid temperature T_L , we have:

$$h_{fc,Gniel} = \frac{\Phi_w}{(T_{w,Gniel} - T_L) 4S_{heat}} \quad (6.1)$$

$$h_{fc,exp} = \frac{\Phi_w}{(T_{w,exp} - T_L) S_{heat}} \quad (6.2)$$

Writing $T_{w,Gniel} = T_{w,real}$ then yields:

$$h_{fc,exp} = 4h_{fc,Gniel} \quad (6.3)$$

On Figure 6.2 we display the predictions of Gnielisnki correlation including this correction by a factor 4 on the HTC for Richenderfer and Kossolapov cases. We also test a 10% reduction on the HTC for Jens-Lottes cases to assess the error made by Gnielinski correlation.

On the same Figure, we also present predictions achieved with the local HTC estimation implemented in NCFD (Eq. ??), using a value of $y^+ = 100$.

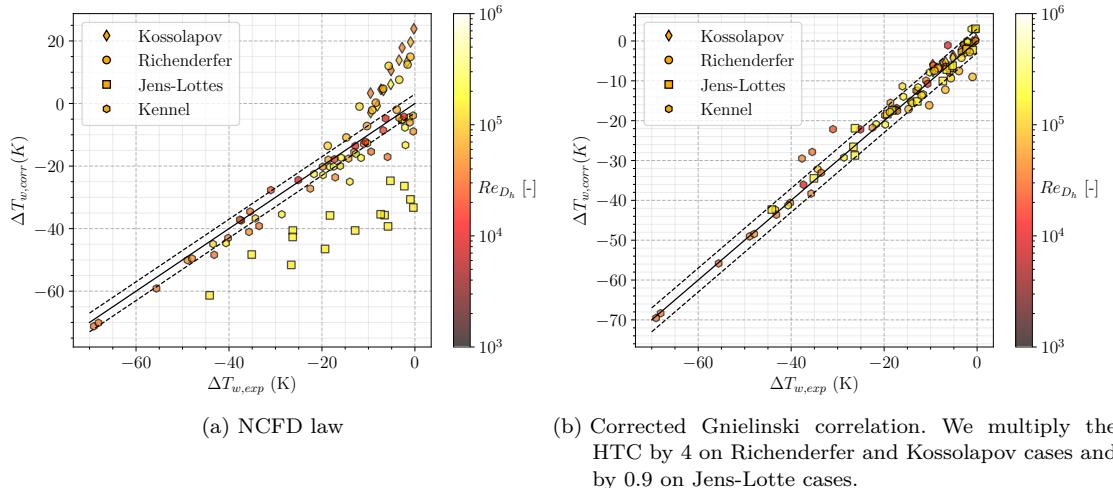


Figure 6.2: Predictive capability of wall temperature by NCFD law and Gnielinski correlation including corrections. $\pm 3K$ error bars indicated.

The NCFD approach yields predictions similar to the 1D correlations (Figure 6.1) with larger underestimations on Jens-Lottes measurements. On the other hand, we see that applying a constant correction to the Gnielinski correlation (3.5 for Kossolapov and Richenderfer cases, 0.9 for Jens-Lottes cases) suffices to yield accurate predictions on the whole range of wall temperature measurements.

Remark : The NCFD law was tested without running CFD simulations. The equations were re-written in python to allow its testing outside of the whole code. The use of $y^+ = 100$ as well as the Mac Adams correlation (Eq. ??) for the friction velocity U_τ may induce a difference with the predictions that could be achieved by running a complete CFD computation of the considered cases.

The average errors obtained with each model are summed up on Table 6.2

Model	Kossolapov err. [K]	Richenderfer err. [K]	Jens-Lottes err. [K]	Kennel err. [K]
Dittus-Boelter	19.67	15.07	10.09	3.13
Gnielinski	20.31	14.06	6.09	1.74
NCFD law	15.52	9.25	23.69	3.36
Corrected Gnielinski	1.34	3.08	1.57	1.74

Table 6.2: Average errors achieved by the considered models on each data sets.

Recalling that Gnielinski correlation was also providing good results on the DEBORA cases with R12 (Chapter ??), this further indicates it as a proper choice regarding single-phase HTC estimation in the HFP model. However, we will later allow the use of the correction factors when needed to ensure a proper representation of the single-phase part when trying to assess the models associated to boiling.

6.2 SINGLE BUBBLE QUENCHING AREA

When computing the quenching heat flux, we need to provide the total wall area visited by a single bubble $A_{q,1b}$ that will undergo quenching.

In wall boiling model that do not consider bubble sliding [**kurul_podowski**, **ncfd_hfp**, **shaver_podowski**] the impacted area at bubble lift-off is often considered as :

$$A_{q,1b} = F_A \pi R_{lo}^2 \quad (6.4)$$

with F_A being an enhancement factor that accounts for the possibility that the bubble will induce quenching over a surface larger than its projected area.

$$A_{q,1b} = \begin{cases} \pi R_{lo}^2 & \text{if } l_{sl} \leq R_{lo} - R_d \\ \frac{1}{2} \pi R_d^2 + l_{sl} (R_d + R_{lo}) + \frac{1}{2} \pi R_{lo}^2 & \text{if } l_{sl} \geq R_{lo} + R_d \end{cases} \quad (6.5)$$

Which can be re-expressed by defining $l_{sl}^* = \frac{l_{sl}}{R_{lo}}$ and $A_{q,1b}^* = \frac{A_{q,1b}}{\pi R_{lo}^2}$

$$A_{q,1b}^* = \begin{cases} 1 & \text{if } l_{sl}^* \leq 1 - \frac{R_d}{R_{lo}} \\ \frac{1}{2} \left(1 + \left(\frac{R_d}{R_{lo}} \right)^2 \right) + \frac{l_{sl}^*}{\pi} \left(1 + \frac{R_d}{R_{lo}} \right) & \text{if } l_{sl}^* \geq 1 + \frac{R_d}{R_{lo}} \end{cases} \quad (6.6)$$

and we linearly interpolate those two expressions for the region where $1 - \frac{R_d}{R_{lo}} \geq l_{sl}^* \geq 1 + \frac{R_d}{R_{lo}}$.

6.3 BUBBLE GROWTH

The question of the bubble growth law during its lifetime including sliding is still an open question that aims to cover various types of heat transfer mechanisms:

- Evaporation due to superheated liquid near the bubble base ;
- Evaporation of a liquid microlayer trapped between the base of the bubble and the wall ;
- Condensation on top of the bubble when it reaches subcooled liquid ;
- Convective heat transfer due to relative velocity between the bubble and the liquid.

To our knowledge, many authors that have been tackling this issue had to consider empirical or fitted parameters when trying to exhaustively account for all the above heat transfers. For instance, Zhou [45] and Yoo [41] have proposed growth models that consider all the previously mentioned mechanisms. However, to fully close their mathematical model, many empirical values were used such as:

- The ratio between the bubble projected area and the microlayer area ;
- The fraction of bubble area facing subcooling liquid ;
- Value of coefficients in the condensation law [19].

Moreover, those models postulate the existence of a microlayer contributing to the growth while recent numerical and experimental investigations showed that the bubble may as well grow with a microlayer or in a pure contact line regime depending on the operating conditions [2, 15, 38].

In order to assess the force modeling proposed before, we choose a simpler growth law derived from heat conduction in the superheated liquid layer [26].

$$R(t) = K J \alpha_w \sqrt{\eta_L t} \quad (6.7)$$

where K is an adjustable constant, with a value around the unity depending on the boiling conditions, often expressed as $K = \frac{2b}{\sqrt{\pi}}$. In the case of pool boiling in an uniformly superheated liquid, Plesset & Zwick [26] found $b = \sqrt{3}$, Forster & Zuber [7] obtained $b = \pi/2$ while Zuber [46] stated that values of b should be lying between 1 and $\sqrt{3}$. More recently, Yun *et al.* [42] used $b = 1.56$. We can thus observe that $K = 2$ is likely to be an upper bound value for the growth constant. This value can thus be lower in the case of subcooled flow boiling. For instance, later comparisons with experimental measurements suggest values of K slightly below 1 for subcooled flow boiling (Figure 5.13).

This type of bubble growth has been widely used, and showed good agreement with many experimental observations and is particularly valid for early growth stages or small bubbles at high pressure [13, 15, 26].

6.3.1 Analytic derivation of bubble growth in a linear thermal boundary layer

To further study the bubble growth process, we will try to derive an analytic

In this section, computations are conducted using the spherical coordinates $(\bar{e}_r, \bar{e}_\theta, \bar{e}_\varphi)$ with coordinates (r, θ, ϕ) .

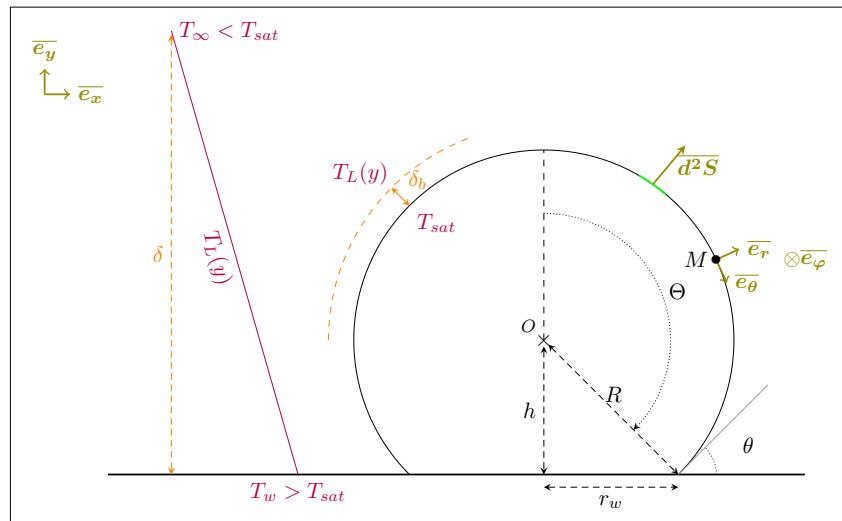


Figure 6.3: Studied geometry

Geometrical definitions :

- $\Theta = \pi - \theta$ the angular portion of the truncated sphere in spherical coordinates ;
- $r_w = R \sin(\theta) = -R \sin(\Theta)$ the bubble foot radius ;

- $h = R\cos(\theta) = -R\cos(\Theta)$ the distance between the wall and the center of the bubble (> 0 if $\theta < \pi/2$, < 0 otherwise) ;
- R and $V = \frac{4}{3}\pi R^3 f_V(\theta)$ the radius and the volume of the bubble ;
- $\overline{d^2S} = R^2 \sin(\theta) d\theta d\varphi \overline{e_r}$ the surface vector in spherical coordinates ;
- $y = R\cos(\theta) + h = R(\cos(\theta) - \cos(\Theta))$ the distance to the wall in cartesian coordinates.

Thermal-hydraulics definitions :

- $\Delta T_L = T_{sat} - T_\infty$ et $\Delta T_w = T_w - T_{sat}$ the subcooling of the liquid and the wall superheat respectively ;
- δ et δ_b the flow boundary layer thickness and the bubble boundary layer thickness respectively ;
- d^2Q_b the heat received by the bubble between t and $t + dt$ through the surface d^2S ;
- $\lambda, \rho, c_p, \eta, h$ the thermal conductivity, density, heat capacity, thermal diffusivity and mass enthalpy respectively (l standing for liquid and g for gas) ;
- $\text{Ja}_w = \Delta T_w \rho_L c_{p,L} / (h_{LV} \rho_V)$ the wall superheat (or boiling) Jakob number and $\text{Ja}_L = \Delta T_L \rho_L c_{p,L} / (h_{LV} \rho_V)$ the subcooled liquid (or condensation) one.

The thermal boundary layer of the flow is assumed to follow a linear profile, giving the expression :

$$T_l(y) = T_w + \frac{T_\infty - T_w}{\delta} y \quad (6.8)$$

If we consider that the bubble stays at a temperature close to T_{sat} , the radial component of the temperature gradient at the bubble's interface yields :

$$\nabla(T) \cdot \overline{e_r} = \frac{\partial T}{\partial r}(R, \theta, \phi) \approx \frac{T_l(y) - T_{sat}}{\delta_b} \quad (6.9)$$

Applying Fourier's law to the liquid close to the bubble : $\overline{j_Q} = -\lambda_l \nabla(T)$, then the bubble receives between t and $t + dt$ through d^2S :

$$d^2Q_b = \overline{j_Q} \cdot (-\overline{d^2S}) \quad (6.10)$$

$$= \lambda_l \frac{\partial T}{\partial r}(R, \theta, \varphi) R^2 \sin(\theta) d\theta d\varphi \quad (6.11)$$

$$\approx \lambda_l \frac{T_l(y) - T_{sat}}{\delta_b} R^2 \sin(\theta) d\theta d\varphi \quad (6.12)$$

$$= \lambda_l \frac{1}{\delta_b} \left[T_w + \frac{T_\infty - T_w}{\delta} y - T_{sat} \right] R^2 \sin(\theta) d\theta d\varphi \quad (6.13)$$

$$= \frac{\lambda_l}{\delta_b} \left[\Delta T_w - \frac{\Delta T_w + \Delta T_l}{\delta} R [\cos(\theta) - \cos(\Theta)] \right] R^2 \sin(\theta) d\theta d\varphi \quad (6.14)$$

$$= \frac{\lambda_l}{\delta_b} \left[\Delta T_w R^2 \sin(\theta) - \frac{\Delta T_w + \Delta T_l}{\delta} R^3 [\cos(\theta) - \cos(\Theta)] \sin(\theta) \right] d\theta d\varphi \quad (6.15)$$

The total heat flux received by the bubble can then be derived, supposing that δ_b is constant all around the bubble between t and $t + dt$:

$$Q_b = \int_{\varphi=0}^{\varphi=2\pi} \int_{\theta=0}^{\Theta} d^2 Q_b \quad (6.16)$$

$$= \frac{2\pi\lambda_l}{\delta_b} \left[\int_0^{\Theta} \Delta T_w R^2 \sin(\theta) d\theta + \int_0^{\Theta} \frac{\Delta T_w + \Delta T_l}{\delta} R^3 \cos(\Theta) \sin(\theta) d\theta - \int_0^{\Theta} \frac{\Delta T_w + \Delta T_l}{\delta} R^3 \cos(\theta) \sin(\theta) d\theta \right] \quad (6.17)$$

$$= \frac{2\pi\lambda_l}{\delta_b} \left[\Delta T_w R^2 (1 - \cos(\Theta)) + \frac{\Delta T_w + \Delta T_l}{\delta} R^3 \left[\cos(\Theta) (1 - \cos(\Theta)) - \frac{1}{4} (1 - \cos(2\Theta)) \right] \right] \quad (6.18)$$

$$= \frac{2\pi\lambda_l R^2}{\delta_b} \left[\frac{-R}{2\delta} (\Delta T_w + \Delta T_l) (1 + 2\cos(\alpha) + \cos^2(\alpha)) + \Delta T_w (1 + \cos(\alpha)) \right] \quad (6.19)$$

$$= \frac{2\pi\lambda_l R^2}{\delta_b} (1 + \cos(\alpha)) \left[\Delta T_w - \frac{R}{2\delta} (\Delta T_w + \Delta T_l) (1 + \cos(\alpha)) \right] \quad (6.20)$$

Between t and $t + dt$, the bubble receives a $Q_b dt$ energy amount through thermal diffusion. Assuming this energy solely contributes to evaporation of the surrounding liquid, the resulting mass of generated vapor is :

$$dm_g = \rho_g dV = \frac{Q_b dt}{h_{lg}} \quad (6.21)$$

$$\text{then } \frac{dV}{dt} = \frac{Q_b}{\rho_g h_{lg}} \quad (6.22)$$

Since $V = \frac{4}{3}\pi R^3 f_V(\alpha)$, we can write :

$$\frac{dV}{dt} = \frac{4}{3}\pi f_V(\alpha) 3R^2 \frac{dR}{dt} \quad (6.23)$$

Then :

$$\frac{dR}{dt} = \frac{1}{4\pi R^2 f_V(\alpha)} \frac{1}{\rho_g h_{lg}} \frac{2\pi\lambda_l R^2}{\delta_b} (1 + \cos(\alpha)) \left[\Delta T_w - \frac{R}{2\delta} (\Delta T_w + \Delta T_l) (1 + \cos(\alpha)) \right] \quad (6.24)$$

$$= \frac{1}{2f_V(\alpha)} \frac{\Delta T_w}{h_{lg}\rho_g} \frac{\lambda_l}{\delta_b} (1 + \cos(\alpha)) \left[1 - \frac{R}{2\delta} \left(1 + \frac{\Delta T_l}{\Delta T_w} \right) (1 + \cos(\alpha)) \right] \quad (6.25)$$

$$= \frac{\text{Ja}_w \eta_l}{2\delta_b f_V(\alpha)} (1 + \cos(\alpha)) \left[1 - \frac{R}{2\delta} \left(1 + \frac{\text{Ja}_l}{\text{Ja}_w} \right) (1 + \cos(\alpha)) \right] \quad (6.26)$$

If we define :

$$a = \frac{\text{Ja}_w \eta_l}{4\delta_b \delta f_V(\alpha)} \left(1 + \frac{\text{Ja}_l}{\text{Ja}_w} \right) (1 + \cos(\alpha))^2 \text{ et } b = \frac{\text{Ja}_w \eta_l}{2\delta_b f_V(\alpha)} (1 + \cos(\alpha)) \quad (6.27)$$

Finally :

$$\frac{dR}{dt} + aR = b \quad (6.28)$$

Solutions of this differential equation depend on the hypothesis over δ and δ_b . In a first approach, we will consider that δ does not vary during the whole bubble growth. This thickness could be expressed using boundary layer thickness correlations for example (laminar or turbulent depending on the Reynolds number).

On the other hand, we will consider 3 different choices to model δ_b :

6.3.2 Case 1 : δ_b is constant

This is a **strong assumption** since it means that δ_b does not depend on the temperature and the flow shear rate facing the bubble. In this case, a and b are constant, giving :

$$\frac{dR}{dt} + aR = b \quad (6.29)$$

With the initial condition $R(t=0) = 0$ the solution of this differential equation is :

$$R(t) = \frac{b}{a} (1 - e^{-at}) \text{ where } \frac{b}{a} = \frac{2\delta}{\left(1 + \frac{\text{Ja}_l}{\text{Ja}_w}\right)(1 + \cos(\alpha))} = R_\infty \text{ is the final bubble equilibrium radius.} \quad (6.30)$$

6.3.3 Case 2 : $\delta_b = \sqrt{\eta_l t}$

This expression derives from the growth of a boundary layer through pure diffusion, as studied by LEGENDRE *et al.*

Such a boundary layer thickness is also used when one writes the quenching heat flux (see Section 7.1 and DEL VALLE & KENNING work).

In this case, this means that the boundary layer around the bubble interface grows through diffusion only.

Thus, it yields :

$$\frac{dR}{dt}(t) + a(t)R(t) = b(t) \quad (6.31)$$

$$a(t) = \frac{\text{Ja}_w \sqrt{\eta_l}}{4\delta f_V(\alpha) \sqrt{t}} \left(1 + \frac{\text{Ja}_l}{\text{Ja}_w}\right) (1 + \cos(\alpha))^2 = K_a t^{-1/2} \text{ and } b(t) = \frac{\text{Ja}_w \sqrt{\eta_l}}{2f_V(\alpha) \sqrt{t}} (1 + \cos(\alpha)) = K_b t^{-1/2} \quad (6.32)$$

With the initial condition $R(t=0) = 0$, the solution is given by :

$$R(t) = R_\infty \left(1 - e^{-2K_a \sqrt{t}}\right) \text{ avec } R_\infty = \frac{K_b}{K_a} \quad (6.33)$$

6.3.4 Case 3 : $\delta_b = CR$

In this last case, the bubble boundary layer is assumed to be proportional to the bubble radius R , through a constant coefficient C . This yields :

$$a(t) = \frac{\text{Ja}_w \eta_l}{4\delta f_V(\alpha) CR(t)} \left(1 + \frac{\text{Ja}_l}{\text{Ja}_w}\right) (1 + \cos(\alpha))^2 = K'_a \frac{1}{R(t)} \text{ et } b(t) = \frac{\text{Ja}_w \eta_l}{2f_V(\alpha) CR(t)} (1 + \cos(\alpha)) = K'_b \frac{1}{R(t)} \quad (6.34)$$

Giving :

$$\frac{dR}{dt}(t) + K'_a R(t) = K'_b \frac{1}{R(t)} \quad (6.35)$$

Which the solution with the initial condition $R(t=0) = 0$ is :

$$R(t) = R_\infty \left(W \left(-e^{-tK_a'^2/K_b' - 1} \right) + 1 \right) \quad (6.36)$$

With W being the LAMBERT function defined as the reciprocal function of $w \rightarrow we^w$ on \mathbb{C} .

6.3.5 Comparison with experimental data and DNS

To assess the three models presented above, we compared the time-dependent radius profile given by an experiment conducted by MAITY as shown in Figure 6.4.

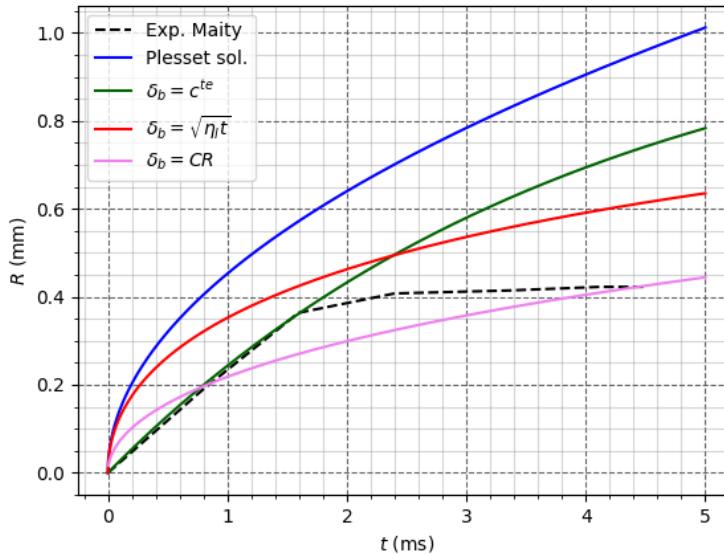


Figure 6.4: Comparison with single bubble growth measurement from MAITY : Boiling water at $\Delta T_{sub} = 0.2^\circ\text{C}$, $\Delta T_w = 5.9^\circ\text{C}$, $U_{liq} = 0.23 \text{ m/s}$ and $P = 1 \text{ bar}$. Green : $\delta_b = 10^{-5} \text{ m}$ - Red : $\delta_b = \sqrt{\eta_l t}$ - Pink : $\delta_b = 0.1 \times R(t)$ - Blue : PLESSET solution $R(t) = B\sqrt{t}$ with $B = Ja_w \sqrt{12\eta_l/\pi}$. The liquid boundary layer size has been fixed to $\delta \approx 1 \text{ mm}$ according to the experimental measurements.

As we can see, the PLESSET solution overestimates both the growth and the size of the bubble as it could have been expected since this solutions is found for a uniformly superheated liquid. Concerning the three different approaches previously developed :

- The constant δ_b hypothesis seems to better fit the first stage of bubble growth (with an optimal choice of δ_b value). However, the imposed growth regime seems to large when we compare to the moderate growth of the measured bubble. Moreover, this model yields a linear start of bubble growth, while it has been thoroughly validated that under a large range of thermal-hydraulics conditions, bubble growth begins with a \sqrt{t} profile.
- The contrary is observed for the $\delta_b = CR$ model, with a growth being globaly too slow.
- Choosing $\delta_b = \sqrt{\eta_l t}$ seems to better reproduce the growth regime. Even though the bubble radius is slightly overestimated, the shape of the time-dependent profile looks similar to the experimental measurement, especially since the growth is progressively damped.

To further assess the modeling, we compare the derived profiles with DNS data from URBANO *et al.* [Urbano2018] on Figure 6.5.

First, it is important to note that the expression of the equilibrium radius R_∞ matches the analytical derivation of URBANO *et al.*. Figure 6.5 shows a difference betwee, the computed equilibrium radius and the DNS equilibrium radius. This discrepancy may rely on the fact that Urbano *et al.* considered solid wall heat diffusion while our model considers a constant wall temperature.

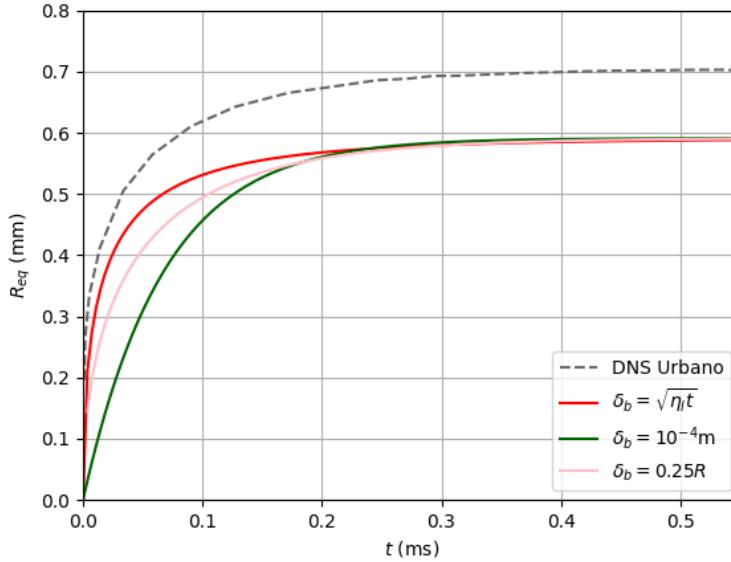


Figure 6.5: Comparison with zero-gravity DNS data from URBANO *et al.*: Water at $P = 1.01$ bar, $\Delta T_{sub} = 10^\circ\text{C}$, $\Delta T_w = 2^\circ\text{C}$, $U_{liq} = 0$ m/s and $\alpha = 50^\circ$.

However, comparing the shapes of the predicted growth, we can see that the $\delta_b = \sqrt{\eta t}$ hypothesis seems to give a growth regime in accordance with the DNS results. The other hypotheses do not greatly differ, but they result from an arbitrary choice for δ_b or C . Thus, it seems appropriate to consider that the $\delta_b = \sqrt{\eta t}$ hypothesis is reasonable to model the evolution of the boundary layer thickness at the liquid-vapor interface.

Finally, we present on Figure 6.6 the comparison between the $\delta_b = \sqrt{\eta t}$ model and 3 DNS profiles for a same Jakob number ratio, but at different subcoolings and superheats.

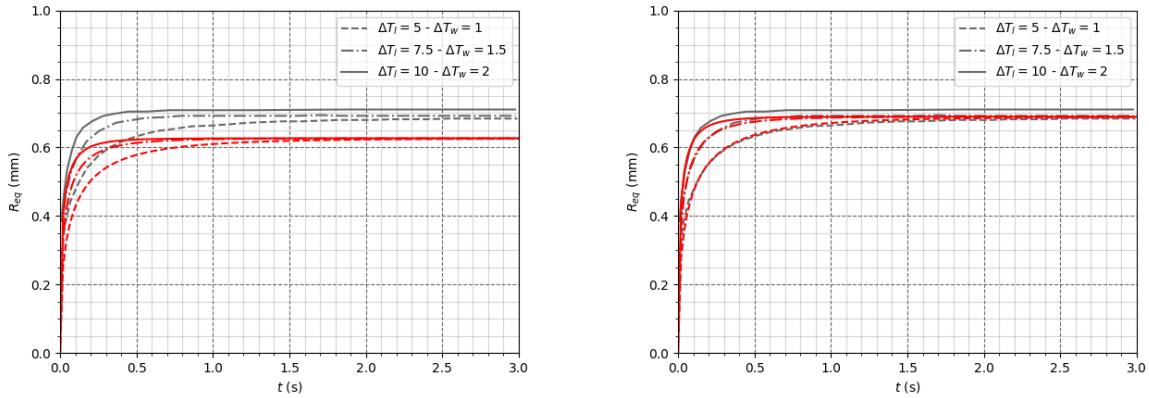


Figure 6.6: Comparison of the model (red) with results from Urbano *et al.* (gray) at 3 different pairs of $(\Delta T_l, \Delta T_w)$
- Left : R_∞ from the model - Right : R_∞ imposed equal to the DNS

The difference between the 3 growth regime predicted by the model is really close to the difference captured by the DNS. A discrepancy over the final equilibrium radius is still observed, but imposing the final radius from the DNS in the model yields strongly matching profiles between both approaches. It thus seems appropriate to consider the $\delta_b = \sqrt{\eta t}$ profile to represent the boundary layer thickness around the bubble.

In this case, the average radius of the bubble over a growth time t_g (as needed in Subsection ??) is :

$$\overline{R(t)} = \frac{1}{t_g} \int_0^{t_g} R(t) dt = \frac{R_\infty}{t_g} \left[\frac{e^{-2K_a\sqrt{t}} (2K_a\sqrt{t} + 1)}{2K_a^2} + t \right]_0^{t_g} \quad (6.37)$$

$$= \frac{R_\infty}{2K_a^2 t_g} \left(e^{-2K_a\sqrt{t_g}} (2K_a\sqrt{t_g} + 1) + 2K_a^2 t_g - 1 \right) \quad (6.38)$$

Moreover, if we consider a lift-off radius R_d , we can express the associated growth time t_g :

$$t_g = \left[\frac{1}{K_a} \ln \left(\frac{1}{\sqrt{1 - \frac{R_d}{R_\infty}}} \right) \right]^2 = \left[\frac{1}{K_a} \ln \left(\sqrt{1 - \frac{R_d}{R_\infty}} \right) \right]^2 \quad (6.39)$$

This expression could then be used as a closure relationship for t_g in the HFP model, meaning that this growth time will depend on the departure diameter closure for R_d .

6.3.6 Estimation of the thermal boundary layer thickness δ

In order to fully close the modeling of the bubble growth, we have to compute the thermal boundary layer thickness δ .

To do so, we test a first approach based on the hydrodynamic boundary layer profile. In the turbulent layer, the non-dimensional liquids velocity u_l^+ is :

$$u_l^+ = \frac{1}{\kappa} \ln(y^+) + B, \text{ with } \kappa = 0.41 \text{ and } B = 5.25 \quad (6.40)$$

Since $u_l^+(y^+) = u_l(y)/u_\tau$ and $y^+ = yu_\tau/\nu_l$, we can compute the height of the hydrodynamic boundary layer δ_h where $u_l(\delta_h) = 0.99u_{l,bulk}$ as :

$$\delta_h = e^{\kappa(0.99u_{l,bulk}\sqrt{\rho_l/\tau_w} - B)} \times \nu_l \sqrt{\frac{\rho_l}{\tau_w}} \quad (6.41)$$

where τ_w is computed using the Mac Adams correlation (Eq. ??).

Finally, to get an approximation of the thermal boundary layer thickness, we consider a simple first approach as :

$$\delta = \frac{1}{Pr_l} \delta_h \quad (6.42)$$

Since the Prandtl number is the ratio of momentum diffusivity to thermal diffusivity, its inverse shall approximately scale the ratio between the thermal boundary layer and hydrodynamic boundary layer thickness.

6.3.7 Estimation of t_g against experimental data

In order to assess the proposed approach to compute t_g , we compare the yielded results with data taken from Unal of maximum bubble growth.

Only 6 measurements of maximum growth time are available (**Je vais en ajouter d'autres par la suite**) but they are associated with the bubble lift-off diameter. Since those measurements were conducted with boiling water on stainless steel, we set the contact angle at $\alpha = 80^\circ$.

We also compare the predictions with the model proposed by Kommajosula :

$$t_g = \left(\frac{D_d}{4K} \right)^2 \quad (6.43)$$

$$K = \frac{\sqrt{\eta_l} \text{Ja}_w}{0.804\sqrt{\text{Pr}_l}} + \chi 1.95 \text{Ja}_w \eta_l, \text{ with } \chi = A - B\zeta \quad (6.44)$$

where $\zeta = \text{Ja}_l/\text{Ja}_w$ and both $A = 1.55$ and $B = 0.05$ have been fitted over the data of Klausner by Mazzocco *et al.*.

The results are displayed on Figure 6.7.

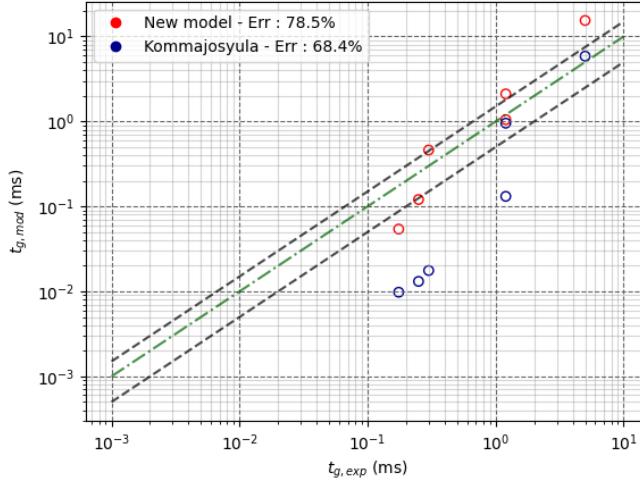


Figure 6.7: Comparison of the proposed model and Kommajosyula model against experimental data from Unal. Black lines represent the $\pm 50\%$ error bars.

As we can see, the average error from our model is greater than Kommajosyula's one. However, this is mainly due to the highest measured growth time (upper right point). Without this measurement, the average error reaches 52.5%, indicating that a much greater number of experimental measurements should be needed properly evaluate each model.

On the other hand, we may consider that the proposed approach could be of interest since it is not based on data-fitted parameters while providing reasonable results.

Author	Fluid	D_h [mm]	P [bar]	G_L [kg/m ² /s]	ΔT_L [K]	ϕ_w [kW/m ²]	ΔT_w [K]	D_d [mm] (N_{mes})
Maity [21] (2000)	Water	20	1.01	0 - 239.6	0.3 - 0.7	N.A.	5 - 5.9	0.788 - 1.71 (9)
Kossolapov [15] (2021)	Water	20	20 - 40	500 - 1500	0.3 - 0.7	N.A.	5 - 5.9	0.788 - 1.71 (9)

Table 6.3: Bubble growth time data in vertical flow boiling

6.4 BUBBLE WAIT TIME

The wait time between two nucleation events on an active site corresponds to the time needed for the thermal boundary layer to reconstruct after its disruption due to bubble departure from the nucleation site.

Formulation of Basu *et al.* [basu_heat_2005]:

$$t_w = 139.1 \Delta T_w^{-4.1} \quad (6.45)$$

Formulation of Kommajosyula [Komma]:

Author	Fluid	D_h [mm]	P [bar]	G_L [kg/m ² /s]	ΔT_L [K]	ϕ_w [kW/m ²]	ΔT_w [K]	D_d [mm] (N_{mes})
Basu <i>et al.</i> [basu_heat] (2005)	Water	20	1.01	0 - 239.6	0.3 - 0.7	N.A.	5 - 5.9	0.788 - 1.71 (9)
Richenderfer <i>et al.</i> [richenderfer_investigations_2018] (2018)	Water	20	1.01	0 - 239.6	0.3 - 0.7	N.A.	5 - 5.9	0.788 - 1.71 (9)
Kossolapov <i>et al.</i> [15] (2021)	Water	20	1.01	0 - 239.6	0.3 - 0.7	N.A.	5 - 5.9	0.788 - 1.71 (9)

Table 6.4: Bubble wait time data in vertical flow boiling

$$t_w = 0.061 \frac{\text{Ja}_L^{0.63}}{\Delta T_w} \quad (6.46)$$

Remark : Kommajosyula's correlation yields a zero wait time when bulk liquid approaches saturation. This behavior is questionable

Mikic & Rosenhow analytical expression [**mikic**]:

$$t_w = \frac{1}{\pi \eta_L} \left[\frac{(\Delta T_w + \Delta T_L) R_c}{\Delta T_w - T_{sat} \left(\frac{1}{\rho_V} - \frac{1}{\rho_L} \right) \frac{2\sigma}{h_{LV} R_c}} \right]^2 \quad (6.47)$$

A relevant

6.5 NUCLEATION SITE DENSITY

The Nucleation Site Density is among the most influencing parameters over the HFP models predictions, particularly regarding wall temperature. Indeed, its value directly controls the density of bubbles generated at the heater and therefore impacts both the boiling (ϕ_e) and quenching (ϕ_q) heat fluxes to the first order. Being able to come up with correct predictions of the NSD is thus critical if one wishes to properly capture the thermal behavior of the boiling surface.

However, the value of N_{sit} is actually influenced by many parameters being either linked to thermal-hydraulics (wall temperature, pressure, operating fluid) or the heater material (roughness, wettability). That is why its value is often estimated through empirical correlations, for which many different expression have been proposed over the years since the end of the XXth century.

One of the firstly identified behavior of the NSD was its power dependency with the wall superheat ($N_{sit} \propto \Delta T_w^m$), which is form adopted in the correlation of Lemmert & Chawla [**Lemmert**] :

$$N_{sit} = [210 (T_w - T_{sat})]^{1.8} \quad (6.48)$$

Remark : This law is used in the HFP model of Kurul & Podowski and NEPTUNE_CFD to compute N_{sit} .

However, such an expression misses the influence of other parameters such as pressure, which has been proven to be strongly impacting the range of active cavities that can generate bubbles as shown on Figure 6.8 and induces a larger bubble density over the heater.

Moreover, experimental measurements such as in Borishanskii [**borishanskii**] showed that the power dependency on the wall superheat changes by increasing both with pressure and the superheat value itself.

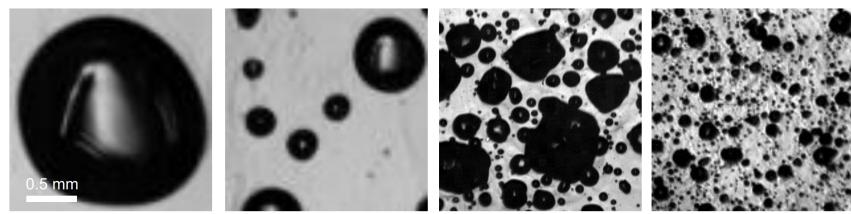


Figure 6.8: HSV Visualization of bubble density at various pressures adapted from Kossolapov [15] (left to right: 1.01 bar, 3 bar, 19.8 bar, 75.8 bar).

This was accounted for by Hibiki & Ishii in 2003 [[hibiki_ishii](#)] who came up with a new correlation that requires an estimation of the minimum activated cavity radius R_c :

$$N_{sit} = N_0 \left(1 - \exp \left(-\frac{\theta^2}{8\mu^2} \right) \right) \left[\exp \left(f(\rho^+) \frac{\lambda'}{R_c} \right) - 1 \right] \quad (6.49)$$

$$R_c = \frac{2\sigma \left(1 + \frac{\rho_V}{\rho_L} \right) / P}{\exp \left(\frac{h_{LV}\Delta T_w}{R_g T_w T_{sat}} \right) - 1} \quad (6.50)$$

$$f(\rho^+) = -0.01064 + 0.48246\rho^+ - 0.22712\rho^{+2} + 0.05468\rho^{+3} \quad (6.51)$$

with R_g the perfect gas constant times the molar mass of the fluid, $N_0 = 4.72 \times 10^5 \text{ m}^{-2}$, $\mu = 0.722 \text{ rad}$, $\lambda' = 2.5 \times 10^{-3} \text{ m}$ and $\rho^+ = \log_{10} \left(\frac{\rho_L - \rho_V}{\rho_V} \right)$.

Remark : This law is used in the HFP model of Gilman & Baglietto [[gilman_baglietto](#)].

We can note that it also includes the value of the static contact angle θ which can be used as a parameter to accounts for wall properties, since it is dependent on the wall roughness, wettability and the operating fluid.

Indeed, a high-wetting material (low values of θ) will allow smaller cavities to be flooded by the surrounding liquid, thus hindering non-condensable gases to be captured inside and become a potentially active nucleation site (Figure 6.9).

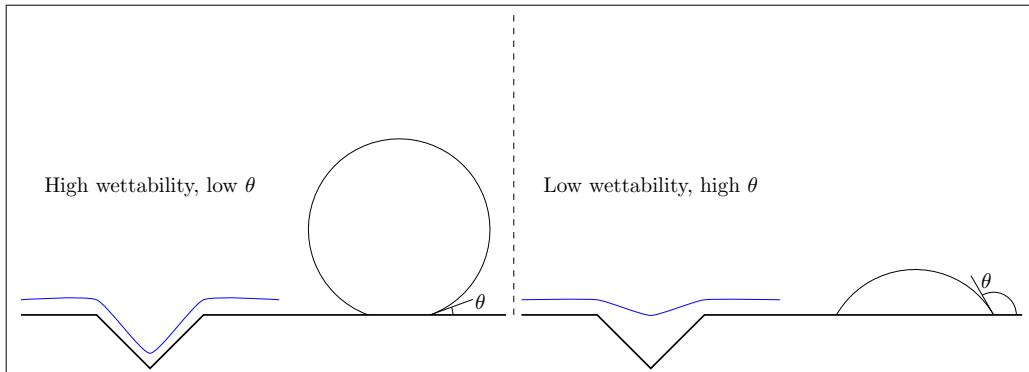


Figure 6.9: Sketch of the link between bubble contact angle and wettability / cavity flooding

This influence of the contact angle on the NSD was confirmed by experimental obversations of Basu *et al.* [[basu_nsit](#)] and was also included in a law correlated on their own measurements :

$$N_{sit} = \begin{cases} 0.34 [1 - \cos(\theta)] \Delta T_w^2 & \text{if } \Delta T_{w,ONB} < \Delta T_w < 15 \text{ K} \\ 3.4 \times 10^{-5} [1 - \cos(\theta)] \Delta T_w^{5.3} & \text{if } \Delta T_w > 15 \text{ K} \end{cases} \quad (6.52)$$

Similarly, Zhou *et al.* [[zhou_nsd](#)] correlated their measurements, including an influence of the pressure:

$$N_{sit} = N_0 (1 - \cos(\theta)) [\exp(f(P) \Delta T_w) - 1] \quad (6.53)$$

$$f(P) = 0.218 \ln\left(\frac{P}{P_0}\right) + 0.1907 \quad (6.54)$$

with $N_0 = 55\,395.26 \text{ m}^{-2}$ and $P_0 = 1.01 \text{ bar}$.

Finally, one of the most recent NSD correlation has been proposed by Li *et al.* in 2018 [li_new_2018] and validated over a large range of measurements by including a more realistic power law for ΔT_w . It avoids the divergence of N_{sit} observed in Hibiki & Ishii law (Eq. 6.49) when reaching high pressure and superheats. It also includes the impact of pressure and contact angle and its evolution with temperature *e.g.* its decrease close to 0° when approaching the critical temperature [song_fan_contact_angle]:

$$N_{sit} = N_0 e^{f(P)} \Delta T_w^{A \Delta T_w + B} (1 - \cos(\theta)) \quad (6.55)$$

$$f(P) = 26.006 - 3.678e^{-2P} - 21.907e^{-P/24.0.65} \quad (6.56)$$

$$A = -2 \times 10^{-4} P^2 + 0.0108P + 0.0119 \quad (6.57)$$

$$B = 0.122P + 1.988 \quad (6.58)$$

$$1 - \cos(\theta) = (1 - \cos(\theta_0)) \left(\frac{T_c - T_{sat}}{T_c - T_0} \right)^\gamma \quad (6.59)$$

with P in MPa, θ_0 the contact angle at room temperature T_0 , and default value being for water $\theta_0 = 41.37^\circ$, $T_c = 374^\circ\text{C}$ $T_0 = 25^\circ\text{C}$, $\gamma = 0.719$.

Remark : We can question the absence of bulk liquid velocity and temperature in the presented law since they should logically influence the nucleation process. However, this impact is rather limited as observed in experimental measurements of Zhou *et al.* and Kossolapov.

In order to assess existing NSD correlations and choose the most pertinent to include in a HFP model, we gather NSD measurements from 4 different authors. The different operating conditions of the chosen data sets are gathered on Table 6.5.

Author	Fluid	P [bar]	G_L [kg/m ² /s]	ΔT_L [K]	ΔT_w [K]	θ_0 [°]	N_{mes} [-]
Zhou [zhou_nsit] (2020)	Water	1.21 - 3.12	482.7 - 1930.6	8 - 15	6.7 - 20.2	51	60
Richenderfer [richenderfer] (2018)	Water	1.01	500 - 1000	10	21.7 - 42.8	80	49
Kossolapov [15] (2021)	Water	1.01 - 75.8	500 - 2000	80	10	80°	63
Borishanskii [borishanskii] (1966)	Water	1.01 - 198	N.A.	N.A.	1.75 - 17.3	45	132

Table 6.5: Nucleation Site Density data in flow boiling

We then compare the predictions achieved by the model of Lemmert & Chawla (Eq. 6.48), Hibiki & Ishii (Eq. 6.49), Zhou *et al.* (Eq. 6.53) and Li *et al.* (Eq. 6.55). The comparison with measurements are presented on Figure 6.10.

The Lemmert & Chawla model appears to fail in predicting the NSD at high pressures. This is a logical drawback of its sole dependence on the wall superheat. More importantly it increasingly underestimates the NSD as pressure increases, which makes it a clearly unsuitable correlation to compute N_{sit} particularly for pressurized flows such as in PWR.

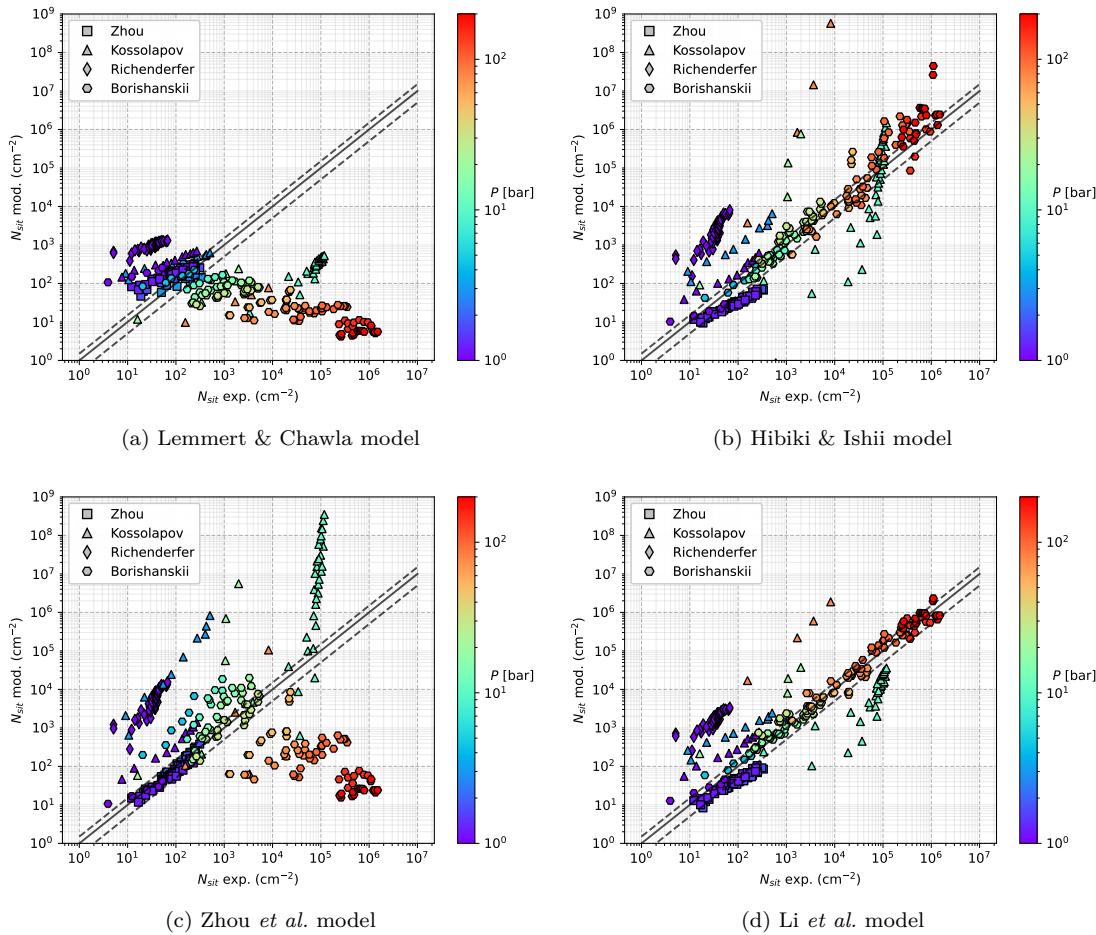


Figure 6.10: Predictions of the chosen models against the experimental data of Table 6.5 with $\pm 50\%$ error bars.
The contact angles

Altough the model of Zhou *et al.* includes a pressure term, its partial calibration on data covering a low range of pressure may explain the large error observed when compared to higher pressure measurements. On the contrary, models from Hibiki & Ishii and Li *et al.* seem to better reproduce the different trends with flow conditions, especially with pressure. The model from Li *et al.* achieves better predictions by avoiding to reach unphysically high values of N_{sit} at higher wall superheat compared to Hibiki & Ishii. This behavior is clear over Kossolapov data at high pressure, where both model lead to overestimations, the strongest discrepancy being associated to Hibiki & Ishii model.

Overall, the model of Li *et al.* is the most efficient with an acceptable agreement on most of the data of Borishanskii and Zhou *et al.*. The measurements of Richenderfer and Kossolapov fail to be precisely reproduced, but it shows a coherent trend and the most limited error when compared to other correlations.

Remark : The coherency of NSD predictions is hard to ensure since we do not know the exact contact angle and boiling surface morphology in the experiments. This was pointed out by Richenderfer [Richen_phd] who observed significant variation in the NSD value depending on the heater, though keeping the same material (ITO). For instance, this may explain the fact that the NSD measured by Kossolapov at 10.5 bar is higher than any other pressure on his experiment, leading to both underpredictions and overpredictions of the model of Li *et al.* depending on the pressure.

All things considered, those comparisons show that the Nucleation Site Density remains among the most difficult quantity to evaluate because of its very large variations over experiments, boiling surfaces and flow conditions. Dedicated correlations are hardly precise outside of their establishment databases. However, it remains the best yet only way to compute N_{sit} . In that regard, the NSD correlation of Li *et al.* appears to be the most coherent choice.

6.6 CONSIDERATIONS ON BUBBLE INTERACTION AND NUCLEATION SITES DEACTIVATION

NSD correlation actually compute the total number of sites where bubbles can nucleate on a surface. However, they do not represent how important a nucleation site will be in term of bubbles generation compared to another.

In fact, Kossolapov has observed that each nucleation site has its own bubble nucleation frequency. Thus implying that some sites play a much greater role in wall nucleation compared to others. One can even consider that some nucleation sites can be neglected regarding their small impact on the whole phase change process.

In order to physically take into account this effect, Gilman considered a statistical approach, by assuming that nucleation site are randomly distributed over the heater surface (Complete Spatial Randomness). Then, considering that a nucleation site located under a bubble will be deactivated, one can express the number of sites actually contributing to bubble nucleation $N_{sit,a}$ as :

$$N_{sit,a} = (1 - \mathcal{P}) N_{sit}, \text{ with } \mathcal{P} = 1 - e^{-N_b \pi (D_b/2)^2} \quad (6.60)$$

where $N_b = t_{gf} N_{sit}$ is the actual average density of bubbles on the heater surface.

The resulting number of sites is a solution of the implicit equation on N_{sit} , which can be solved numerically or using the Lambert function (reciprocal of $w \rightarrow we^{-w}$).

Je vais détailler un peu plus cela avec des schémas clairs, ainsi qu'un exemple de comment cela pondère la densité de site totale, puisque cela permet d'éviter la divergence dans une loi telle que celle de Hibiki & Ishii à haute surchauffe pariétale

6.6.1 Static suppression

If we suppose that the nucleation sites follow a homogeneous spatial Poisson process with an event density λ , we can express the probability of finding n sites within an area A as :

$$\mathcal{P}(N(A) = n) = \frac{(\lambda A)^n}{n!} e^{-\lambda A} \quad (6.61)$$

If we consider the actual number of bubble-generating sites N_b , those sites are holding a bubble over a fraction t_{gf} of the nucleation cycles in average. Thus, the actual density of bubbles held by the sites is : $t_{gf} N_b$. To derive N_b from the value N_{sit} provided by NSD correlations, we have to evaluate the probability of nucleation site overlapping, which corresponds to a distance r lower than R_d between two bubbles.

$$\mathcal{P}(r \leq R_d) = 1 - \mathcal{P}(N(\pi R_d^2) = 0) \quad (6.62)$$

$$= 1 - e^{-N_b t_{gf} \pi R_d^2} = \mathcal{P} \quad (6.63)$$

This probability thus represents the proportion of bubble that can't be geometrically accomodated on the surface. We can then evaluate N_b from N_{sit} as :

$$N_b = (1 - \mathcal{P}) N_{sit} \quad (6.64)$$

$$\Leftrightarrow N_b t_{gf} \pi R_d^2 e^{N_b t_{gf} \pi R_d^2} = N_{sit} t_{gf} \pi R_d^2 \quad (6.65)$$

$$\Leftrightarrow N_b = \frac{\mathcal{W}(N_{sit} \mathbf{A})}{\mathbf{A}} \quad \text{where } \mathbf{A} = t_{gf} \pi R_d^2 \quad (6.66)$$

6.6.2 Static coalescence

Now that the actual number of bubble-generating sites have been identified, we can consider other interaction phenomena that can occur on the boiling surface. For instance, if two sites are simultaneously

generating a bubble at a distance d between R_d and $2R_d$, the bubbles will coalesce while growing up to the detachment diameter. To estimate the probability of having a bubble on a site in this distance range, we consider the probability density function of the nearest-neighbour in the case of a homogeneous spatial Poisson process f with an event density λ .

$$f(r) = 2\lambda\pi r e^{-\lambda\pi r^2} \quad (6.67)$$

The considered probability of interaction is then :

$$\mathcal{P}(R_d \leq r \leq 2R_d) = \int_{R_d}^{2R_d} f(r) dr \quad (6.68)$$

$$= e^{-\lambda\pi R_d^2} - e^{-4\lambda\pi R_d^2} \quad (6.69)$$

$$= e^{-\lambda\pi R_d^2} \left[1 - \left(e^{-\lambda\pi R_d^2} \right)^3 \right] \quad (6.70)$$

$$= \mathcal{P}_{coal,st} \quad \text{with} \quad \lambda = t_g f N_b \quad (6.71)$$

The density of bubble-generating sites that will lead to a static coalescence can then be estimated as :

$$N_{coal,st} = \mathcal{P}_{coal,st} N_b \quad (6.72)$$

If we suppose that coalescing bubbles will instantly lift-off due to the perturbation associated with the coalescence process, this yields an associated boiling flux :

$$\phi_{e,coal,st} = N_{coal,st} f \rho V h_{LV} \frac{4}{3} \pi R_{coal,st}^3 \quad \text{where} \quad R_{coal,st} = \sqrt[3]{2} R_d \quad (6.73)$$

considering that the bubbles will merge approximately at $R = R_d$.

6.6.3 Sliding coalescence

Now that suppressed sites and sites that will lead to static coalescence have been identified, the remaining sites $N_{sl} = (1 - \mathcal{P}_{coal,st}) N_b$ will generate sliding bubbles. While sliding, a single bubble swipes an area :

$$A_{sl,1b} \approx l_{sl,1b} \frac{D_d + D_{lo}}{2} \quad (6.74)$$

In this area, there are an average number of bubble-generating sites $N_b A_{sl,1b}$ and an average number of growing bubbles on their sites $t_g f N_b A_{sl,1b}$

Two situations can happen from the sliding process :

- The bubble slides without coalescing
- The bubble coalesces while sliding with a bubble growing on its site and lifts-off

Following the same approach from the static suppression, we can estimate the probability of finding no growing bubble over the sliding surface :

$$\mathcal{P}(N(A_{sl,1b}) = 0) = e^{-N_b t_g f A_{sl,1b}} \quad (6.75)$$

Thus, if a sliding bubble among the N_{sl} does not encounter any growing bubble, the sites on its sliding area will be wiped and thus be quenched by cold liquid. This means that those sites will be suppressed due to the sliding of other bubbles over them.

Among the N_b bubble generating sites we can identify 4 categories of sites :

- Sites generating bubbles which will slide without encountering any growing bubble on their path :

$$N_{sl,NC} = N_{sl} e^{-f t_g N_b A_{sl,1b}}$$

- Sites generating bubbles that will coalesce with a growing bubble during sliding :

$$N_{sl,C} = N_{sl} \left(1 - e^{-ft_g N_b A_{sl,1b}} \right)$$

- Sites which will be suppressed by bubbles sliding without coalescing :

$$N_{sup,sl} = N_{sl,NC} N_b A_{sl,1b}$$

- Sites generating bubbles that will coalesce with a sliding bubble coming from upstream. Those bubbles are still in the growing phase up to detachment when they are coalescing with sliding bubbles. Therefore, there are equal to the number of sliding bubbles that will coalesce :

$$N_{g,C} = N_{sl,C}$$

This allows to finally write :

$$N_b = N_{sl,NC} + N_{sl,C} + N_{sup,sl} + N_{g,C} \quad (6.76)$$

$$= N_{sl} \left[2 - e^{-ft_g N_b A_{sl,1b}} (A_{sl,1b} N_b - 1) \right] \quad (6.77)$$

Which finally yields the total number of sliding bubbles :

$$N_{sl} = \frac{N_b}{2 - e^{-ft_g N_b A_{sl,1b}} (A_{sl,1b} N_b - 1)} \quad (6.78)$$

7

ASSEMBLING A NEW HEAT FLUX PARTITIONING MODEL

7.1 GENERAL DESCRIPTION OF THE MODEL

The main goal of such a model is to provide a way to compute the wall temperature T_w resulting from the applied wall heat flux ϕ_w , or the other way around.

In order to try to be as extensive as possible regarding the different heat transfer mechanisms at stake, the wall heat flux is supposed to be split between 4 different contributions (Figure 7.1) :

- A convective heat flux towards the liquid phase, unaffected by the presence of bubbles on the heater surface : $\phi_{c,l}$
- A boiling heat flux, representing the energy removed from the wall to grow a bubble up to its lift-off diameter : ϕ_b
- A quenching heat flux, accounting for transient heat transfer to the liquid phase when bubbles slide or lift-off from the wall : ϕ_q
- A convective heat flux towards the vapor phase, representing the heat transfer occurring through the dry areas of the surface beneath the bubbles : $\phi_{c,v}$

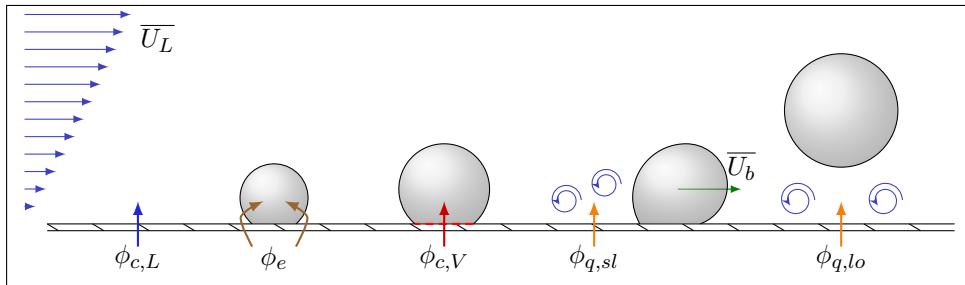


Figure 7.1: Sketch of the considered HFP

The supposed mechanisms yields the total wall heat flux partitioning (7.1) :

$$\phi_w = \phi_{c,l} + \phi_e + \phi_q + \phi_{c,v} \quad (7.1)$$

In the following subsections, we focus our analysis on each term to detail its modeling.

7.1.1 Convective heat fluxes

The convective heat fluxes towards the liquid phase $\phi_{c,l}$ and the vapor phase $\phi_{c,v}$ can be written using an associated heat transfer coefficient (7.2) :

$$\phi_{c,l} = a_{c,l} h_{c,l} (T_w - T_l) \quad \text{and} \quad \phi_{c,v} = a_{c,v} h_{c,v} (T_w - T_v) \quad (7.2)$$

7.1.2 Boiling heat flux

The total energy associated with the nucleation of a bubble with a volume V_b can be expressed as $V_b \rho_v h_{lv}$. If one knows the nucleation frequency f at which bubbles are generated along with the nucleation site density on the heater surface N_{sit} , the resulting heat flux associated with the nucleation phenomenon can thus be written as (7.3) :

$$\phi_b = N_{sit} f V_b \rho_v h_{lv} \quad (7.3)$$

7.1.3 Quenching heat flux

The quenching heat flux accounts for the transient heat transfer which occurs when cold liquid is brought close to the wall when a bubble slides or lifts-off, thus disrupting the previously established thermal boundary layer.

DEL VALLE & KENNING have supposed that this kind phenomenon can be represented as a semi-infinite transient heat transfer between the liquid at T_l and the wall at T_w . Solving the conductive heat transfer problem yields an instantaneous heat flux expressed as Eq. 7.4.

$$\phi_q(t) = \frac{\lambda_l (\textcolor{red}{T}_w - \textcolor{blue}{T}_l)}{\sqrt{\pi \eta_l t}} \quad (7.4)$$

Therefore, we can average this heat flux over a time t_w , during which the quenching operates, and ponderating it both by the portion of the affected heater area a_q and the fraction of quenching time over a total bubble nucleation cycle $t_w f$, yielding :

$$\phi_q = \textcolor{orange}{a_q} \textcolor{blue}{t_w} f \frac{1}{\textcolor{blue}{t_w}} \int_0^{\textcolor{blue}{t_w}} \frac{\lambda_l (\textcolor{red}{T}_w - \textcolor{blue}{T}_l)}{\sqrt{\pi \eta_l t}} dt = \textcolor{orange}{a_q} \textcolor{blue}{t_w} f \frac{2 \lambda_l (\textcolor{red}{T}_w - \textcolor{blue}{T}_l)}{\sqrt{\pi \eta_l \textcolor{blue}{t_w}}} \quad (7.5)$$

7.1.4 Needed closure relationships

After expressing each heat flux components of the global partitioning, the resulting formulations yields a first list of parameters for which closure relationships (or at least precise definition) are needed. Terms previously highlighted in orange will be given a specific definition, terms in blue require a closure law, wall temperature is indicated in red.

The different terms needing further development are listed below :

- The fractions of the heater area ponderating convective and quenching heat transfers : $a_{c,l}$, $a_{c,v}$ and $a_q(??)$
- The convective heat transfer coefficients : $h_{c,l}$ and $h_{c,v}$ (Section ??)
- The nucleation site density over the heater surface : N_{sit} (Section : ??)
- The nucleation frequency, which includes both the growth time t_g (Section ??) of a bubble and the waiting time t_w (Je dois encore proposer une modélisation pour t_w , à discuter) : $f = 1 / (t_g + t_w)$
- The total bubble volume V_b (??) generated until its lift-off, thus including the modeling of the bubble lift-off diameter : D_{lo}
- The phases temperature : T_l (??) and T_v (??)

Part IV
TOWARDS THE INDUSTRIAL GEOMETRY

8

PROMOTEUR

8.1 BOILING FREON IN A TUBE WITH MIXING VANES : DEBORA-PROMOTEUR EXPERIMENTS

In this section, we simulate upward boiling flows of R12 in a vertical tube equipped with mixing vanes and compare the outlet void fraction profile predicted by NEPTUNE_CFD with measurements coming from the DEBORA-Promoteur experiment.

8.1.1 *Description of the experiment*

In 2003, the wish to investigate boiling flows in complex geometries similar to those in PWR fuel assembly lead CEA and EDF to modify the DEBORA facility to introduce mixing vanes (MV) within the tube. This mixing device has been designed to have the same geometric properties as the mixing vanes attached to rod bundle grids (Figure 8.1).

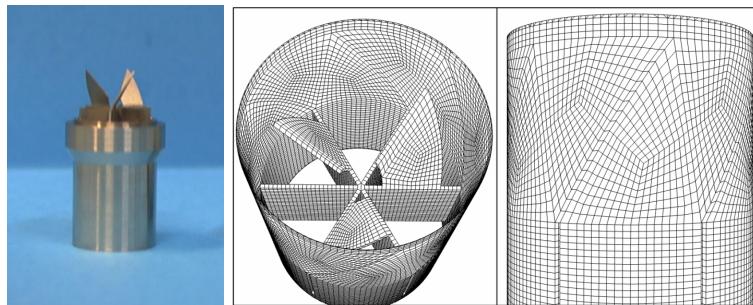


Figure 8.1: Picture of the mixing device (left) and its fine meshing (right).

Two series of measurements were conducted on this geometry :

- Campaign 4800 : measurements of α using two optical probes, mixing device placed $0.455m \approx 23.5D_h$ upstream the end of the heating length
- Campaign 5200 : measurements of α and $U_{G,z}$ using two optical probes, mixing device placed $0.192m \approx 10D_h$ upstream the end of the heating length

The goal of those tests was to observe the impact of the mixing device on the void fraction profile. The induced rotation is expected to gather the bubbles at the center of the tube and enhance condensation for highly subcooled cases. Those expectations are confirmed when looking at experimental α profiles on Figure 8.2. The strong differences compared to simple tube profiles could explain the gain on the CHF value in PWR thanks to the mixing grids. Cases are named following the same nomenclature as presented in Section 2.1.

8.1.2 *Analysis of the Experimental Measurements*

ESTIMATION OF BUBBLE DIAMETER USING AGATE PROM MEASUREMENTS OF URAD

8.1.3 NEPTUNE_CFD simulations of DEBORA-Promoteur cases

We simulated 3 cases for each position of the mixing device, covering different local thermodynamic quality near the vanes ($x_{eq,MV}$) :

- 48G3P26W23Te65 & 52G3P26W23Te65 with $x_{eq,MV} \approx -1\%$
- 48G3P26W23Te69 & 52G3P26W23Te69 with $x_{eq,MV} \approx 4\%$
- 48G3P26W23Te75 & 52G3P26W23Te75 with $x_{eq,MV} \approx 12\%$

Computations are conducted using two meshes for Te69 cases : a large one (M1) with 444 703 cells and a fine one (M2) with 3 487 627 cells. Results for void fraction profiles are shown on Figure 8.2.

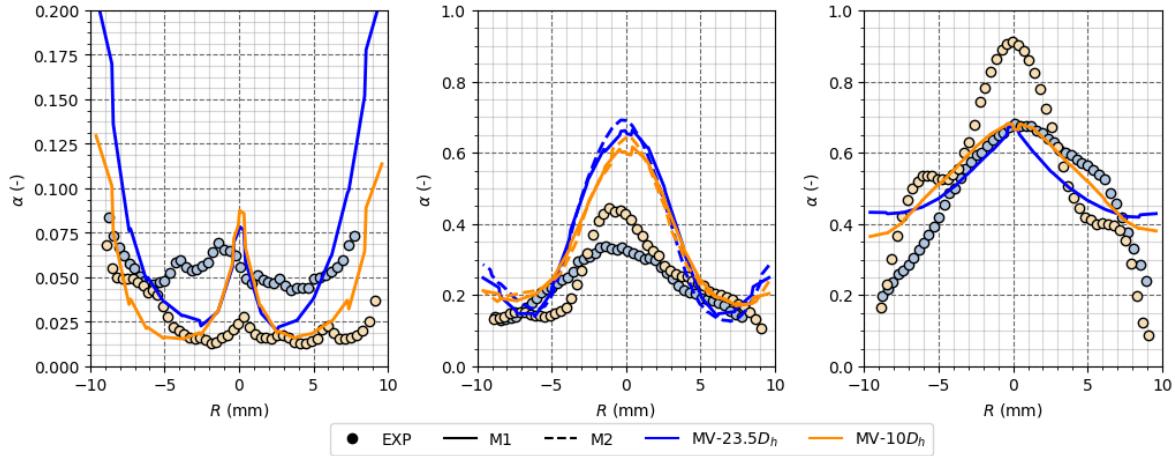


Figure 8.2: NCFD (lines) vs. Exp. (circles) - α profiles for two MV positions ($23.5D_h$ in blue, $10D_h$ in orange)
- $T_{in} = 65^\circ\text{C}$ (left), $T_{in} = 69^\circ\text{C}$ (middle), $T_{in} = 75^\circ\text{C}$ (right) - Simulations using two meshes M1 (coarse) and M2 (fine) for $T_{in} = 69^\circ\text{C}$.

Quantitatively speaking, it seems that NEPTUNE_CFD reproduces the effect of vapor accumulation at the center thanks to the pressure gradient generated by the swirl induced by the mixing vanes. The radial position of the core void fraction peak correctly matches the experimental one.

However, measured void fraction profiles are not predicted correctly. A particularly strong overestimation of the core void fraction is observed as well as close to the wall. The CMFD results tend to rapidly reach a core void fraction around 60% ($T_{in} = 69^\circ\text{C}$ cases) and then flattens with increasing temperature ($T_{in} = 75^\circ$ cases). This contradicts experimental observation where the void fraction profile globally rises when inlet temperature increases, except at the wall where no peak is observed due to bubble removing effect by the liquid's rotation. Moreover, the $T_{in} = 75^\circ$ case with MV at $10D_h$ experimentally shows local α peaks at $R \approx \pm 6\text{mm}$ which remain currently unexplained and not reproduced by the simulations.

To investigate what could be a potential origin for the core void fraction peak overestimation, we present in Section 8.2 single-phase flow simulations in the MV geometry.

8.2 LIQUID WATER FLOW IN A TUBE WITH MIXING VANES : AGATE-PROMOTEUR EXPERIMENT

In this penultimate section, we briefly investigate single-phase flow within the same geometry as Section 8.1.

8.2.1 Description of the experiment

In 2003, using the same experimental geometry as DEBORA-Promoteur cases (Section 8.1), Laser Doppler Velocimetry (LDV) measurements of velocity and turbulent fluctuations for an adiabatic single-phase flow of water were conducted. The outlet pressure was around $P = 2$ bar with an inlet mass flux $G \approx 3000 \text{ kg/m}^2/\text{s}$. Measurements were conducted on 6 different diameters and repeated at various axial positions upstream and downstream the mixing vanes.

A first look at experimental measurements (Figure 8.3) shows that the vanes geometry induces significantly non-symmetric velocity profile. Moreover, we observe high turbulent fluctuations which maximum is located at the same radial position as the maximum radial velocity gradient.

8.2.2 NEPTUNE_CFD simulations of AGATE-Promoteur case

On Figure 8.3, we present some of the results obtained with NEPTUNE_CFD using the $R_{ij} - \varepsilon$ SSG turbulence model on the M2 mesh, along with a smooth wall law and a rough wall law (roughness $\epsilon = 0.01\text{mm}$). The turbulent fluctuations Root Mean Square (RMS) correspond, for instance, to $\sqrt{\langle u_x'^2 \rangle}$ for the x direction where u_i' represents the fluctuating part of the velocity along component i and $\langle \cdot \rangle$ the time-averaging operator. Subscripts R and A stand for radial and axial values ; U_0 is the average inlet velocity.

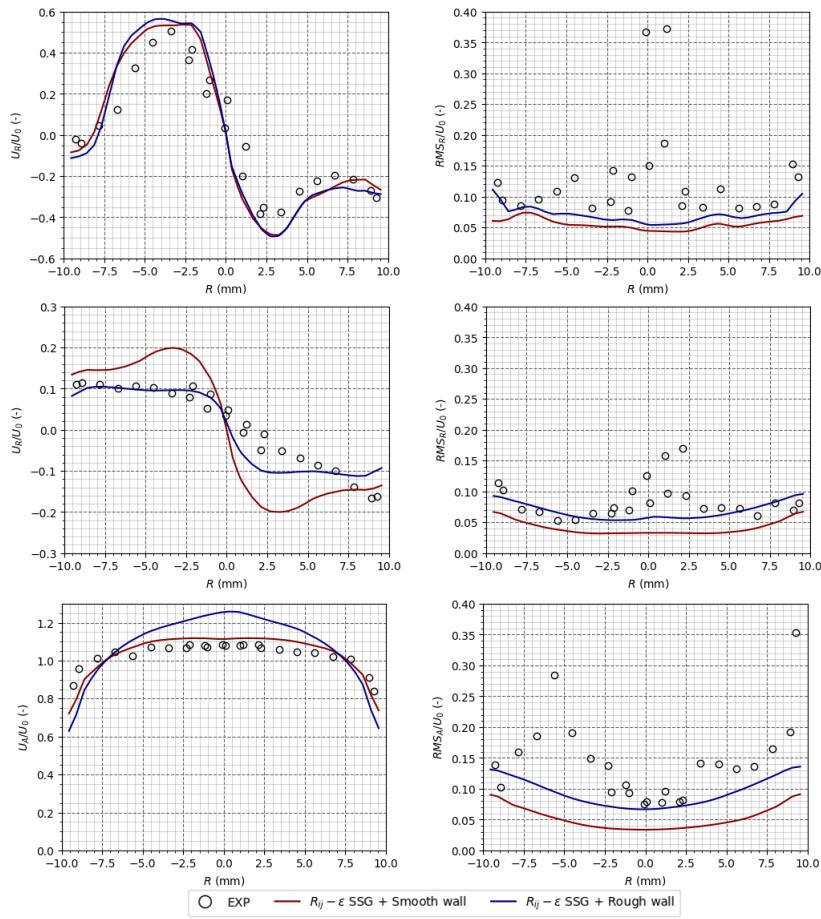


Figure 8.3: NCFD vs. Exp. - Top & Middle : Radial velocity and turbulent RMS ($z = 30\text{mm}$ & $z = 440\text{mm}$) - Bottom : Axial velocity and turbulent RMS ($z = 440\text{mm}$).

Non-symmetric radial velocity profiles close to the MV are quite well reproduced by the simulations. However, far downstream the MV, it appears that the fluid's rotation is overestimated by the model with a smooth wall approach, while applying a roughness helps to reduce the magnitude of the swirl. Moreover, the radial turbulent fluctuations are better estimated by the rough wall approach at $z = 440\text{ mm}$. On the other hand, it seems that the rough wall approach deteriorates the axial velocity profile compared to the experiment. As shown on the bottom part of Figure 8.3, the smooth wall simulation returns a flat velocity profile closer to the experiment than the rough wall one which overestimates the core velocity peak.

Both simulations globally underestimate the turbulent fluctuations, which can have a significant influence over the observed discrepancies on velocity profiles since turbulence plays a key role to homogenize the fluid flow.

Those results finally highlight the fact that simulation of such rotating flows may need a particular wall approach to better capture the induced swirl and its dissipation. Correct prediction of turbulent

fluctuations would be of significant interest to ensure liquid velocity validation. Further investigations on boiling cases could possibly be improved by a roughness approach, which is the current correction used for two-phase wall laws (Subsection 1.1.6).

Part V
CONCLUSION

Part VI
APPENDIX

A

DETAILS ON THE BUBBLE FORCE BALANCE

Aliquam lectus. Vivamus leo. Quisque ornare tellus ullamcorper nulla. Mauris porttitor pharetra tortor. Sed fringilla justo sed mauris. Mauris tellus. Sed non leo. Nullam elementum, magna in cursus sodales, augue est scelerisque sapien, venenatis congue nulla arcu et pede. Ut suscipit enim vel sapien. Donec congue. Maecenas urna mi, suscipit in, placerat ut, vestibulum ut, massa. Fusce ultrices nulla et nisl. Etiam ac leo a risus tristique nonummy. Donec dignissim tincidunt nulla. Vestibulum rhoncus molestie odio. Sed lobortis, justo et pretium lobortis, mauris turpis condimentum augue, nec ultricies nibh arcu pretium enim. Nunc purus neque, placerat id, imperdiet sed, pellentesque nec, nisl. Vestibulum imperdiet neque non sem accumsan laoreet. In hac habitasse platea dictumst. Etiam condimentum facilisis libero. Suspendisse in elit quis nisl aliquam dapibus. Pellentesque auctor sapien. Sed egestas sapien nec lectus. Pellentesque vel dui vel neque bibendum viverra. Aliquam porttitor nisl nec pede. Proin mattis libero vel turpis. Donec rutrum mauris et libero. Proin euismod porta felis. Nam lobortis, metus quis elementum commodo, nunc lectus elementum mauris, eget vulputate ligula tellus eu neque. Vivamus eu dolor.

$$r_w = \frac{1}{2} (\sin(\theta_d) R + \sin(\theta_u) R) \quad (\text{A.1})$$

$$= \frac{R}{2} (\sin(\theta_s + d\theta) + \sin(\theta - d\theta)) \quad (\text{A.2})$$

$$= \frac{R}{2} \left[2\sin\left(\frac{\theta_s + d\theta + \theta_s - d\theta}{2}\right) \cos\left(\frac{\theta_s + d\theta - (\theta_s - d\theta)}{2}\right) \right] \quad (\text{A.3})$$

$$= R\sin(\theta_s) \cos(d\theta) \quad (\text{A.4})$$

$$\overline{F_{CP}} = \frac{2\sigma}{R_c} \frac{\pi d_w^2}{4} \overline{e_y} \quad (\text{A.5})$$

$$= \frac{2\sigma}{R} \frac{\pi 4R^2}{4} \sin^2(\theta) \cos^2(d\theta) \overline{e_\perp} \quad (\text{A.6})$$

$$= 2\sigma\pi R \underbrace{\sin^2(\theta) \cos^2(d\theta)}_{f_{cp}} \overline{e_\perp} \quad (\text{A.7})$$

$$= 2\pi R\sigma f_{cp}(\theta, d\theta) \overline{e_\perp} \quad (\text{A.8})$$

$$\overline{F_{CP}} \cdot \overline{e_\perp} = -d_w\sigma \frac{\pi}{\alpha_r - \alpha_u} (\cos(\alpha_a) - \cos(\alpha_r)) \quad (\text{A.9})$$

$$= \pi 2R\sigma \frac{\sin(\alpha + d\alpha) + \sin(\alpha - d\alpha)}{2} \frac{\cos(\alpha + d\alpha) - \cos(\alpha - d\alpha)}{2d\alpha} \quad (\text{A.10})$$

$$= 2\pi R\sigma \frac{2\sin(\alpha) \cos(d\alpha)}{2} \frac{(-2\sin(\alpha) \sin(d\alpha))}{2d\alpha} \quad (\text{A.11})$$

$$= -2\pi R\sigma \underbrace{\sin^2(\alpha) \frac{\sin(2d\alpha)}{2d\alpha}}_{f_{s,\perp}} \quad (\text{A.12})$$

$$= -2\pi R\sigma f_{s,\perp}(\alpha, d\alpha) \quad (\text{A.13})$$

$$(\text{A.14})$$

LABITUR BONORUM PRI NO	QUE VISTA	HUMAN
fastidii ea ius	germano	demonstratea
suscipit instructior	titulo	personas
quaestio philosophia	facto	demonstrated

Table A.1: Autem usu id.

$$\overline{F_s} \cdot \overline{e_{\parallel}} = -1.215d_w\sigma \frac{\pi(\alpha_r - \alpha_u)}{\pi^2 - (\alpha_r - \alpha_u)^2} (\sin(\alpha_r) + \sin(\alpha_u)) \quad (A.15)$$

$$= -1.215d_w\sigma \frac{\pi 2d\alpha}{\pi^2 - 4d\alpha^2} (\sin(\alpha + d\alpha) + \sin(\alpha - d\alpha)) \quad (A.16)$$

$$= -1.215 2R\sigma \frac{\pi d\alpha}{\pi^2 - 4d\alpha^2} (\sin(\alpha + d\alpha) + \sin(\alpha - d\alpha))^2 \quad (A.17)$$

$$= -2\pi R\sigma \frac{1.215d\alpha}{\pi^2 - 4d\alpha^2} 4\sin^2(\alpha) \cos^2(d\alpha) \quad (A.18)$$

$$= -2\pi R\sigma \underbrace{1.215 \frac{d\alpha}{(\frac{\pi}{2})^2 - d\alpha^2} \sin^2(\alpha) \cos^2(d\alpha)}_{f_{s,\parallel}} \quad (A.19)$$

$$= -2\pi R\sigma f_{s,\parallel}(\alpha, d\alpha) \quad (A.20)$$

A.1 APPENDIX SECTION TEST

Nulla in ipsum. Praesent eros nulla, congue vitae, euismod ut, commodo a, wisi. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Aenean nonummy magna non leo. Sed felis erat, ullamcorper in, dictum non, ultricies ut, lectus. Proin vel arcu a odio lobortis euismod. Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Proin ut est. Aliquam odio. Pellentesque massa turpis, cursus eu, euismod nec, tempor congue, nulla. Duis viverra gravida mauris. Cras tincidunt. Curabitur eros ligula, varius ut, pulvinar in, cursus faucibus, augue. Nulla mattis luctus nulla. Duis commodo velit at leo. Aliquam vulputate magna et leo. Nam vestibulum ullamcorper leo. Vestibulum condimentum rutrum mauris. Donec id mauris. Morbi molestie justo et pede. Vivamus eget turpis sed nisl cursus tempor. Curabitur mollis sapien condimentum nunc. In wisi nisl, malesuada at, dignissim sit amet, lobortis in, odio. Aenean consequat arcu a ante. Pellentesque porta elit sit amet orci. Etiam at turpis nec elit ultricies imperdiet. Nulla facilisi. In hac habitasse platea dictumst. Suspendisse viverra aliquam risus. Nullam pede justo, molestie nonummy, scelerisque eu, facilisis vel, arcu.

A.2 ANOTHER APPENDIX SECTION TEST

Curabitur tellus magna, porttitor a, commodo a, commodo in, tortor. Donec interdum. Praesent scelerisque. Maecenas posuere sodales odio. Vivamus metus lacus, varius quis, imperdiet quis, rhoncus a, turpis. Etiam ligula arcu, elementum a, venenatis quis, sollicitudin sed, metus. Donec nunc pede, tincidunt in, venenatis vitae, faucibus vel, nibh. Pellentesque wisi. Nullam malesuada. Morbi ut tellus ut pede tincidunt porta. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Etiam congue neque id dolor. Donec et nisl at wisi luctus bibendum. Nam interdum tellus ac libero. Sed sem justo, laoreet vitae, fringilla at, adipiscing ut, nibh. Maecenas non sem quis tortor eleifend fermentum. Etiam id tortor ac mauris porta vulputate. Integer porta neque vitae massa. Maecenas tempus libero a libero posuere dictum. Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Aenean quis mauris sed elit commodo placerat. Class aptent taciti sociosqu ad litora torquent per comubia nostra, per inceptos hymenaeos. Vivamus rhoncus tincidunt libero. Etiam elementum pretium justo. Vivamus est. Morbi a tellus eget pede tristique commodo. Nulla nisl. Vestibulum sed nisl eu sapien cursus rutrum.

There is also a useless Pascal listing below: [Listing A.1](#).

Listing A.1: A floating example (`listings` manual)

```
1 for i:=maxint downto 0 do
begin
{ do nothing }
end;
```

BIBLIOGRAPHY

- [1] Mattia Bucci, Jacopo Buongiorno, and Matteo Bucci. "The not-so-subtle flaws of the force balance approach to predict the departure of bubbles in boiling heat transfer". In: *Physics of Fluids* 33.1 (Jan. 2021). Publisher: American Institute of Physics, p. 017110. ISSN: 1070-6631. DOI: [10.1063/5.0036956](https://doi.org/10.1063/5.0036956).
- [2] Lubomír Bureš and Yohei Sato. "On the modelling of the transition between contact-line and microlayer evaporation regimes in nucleate boiling". In: *Journal of Fluid Mechanics* 916 (June 2021). Publisher: Cambridge University Press. ISSN: 0022-1120, 1469-7645. DOI: [10.1017/jfm.2021.204](https://doi.org/10.1017/jfm.2021.204).
- [3] Deqi Chen, Liang-ming Pan, and Song Ren. "Prediction of bubble detachment diameter in flow boiling based on force analysis". In: *Nuclear Engineering and Design* 243 (Feb. 1, 2012), pp. 263–271. ISSN: 0029-5493. DOI: [10.1016/j.nucengdes.2011.11.022](https://doi.org/10.1016/j.nucengdes.2011.11.022).
- [4] Marco Colombo and Michael Fairweather. "Prediction of bubble departure in forced convection boiling: A mechanistic model". In: *International Journal of Heat and Mass Transfer* 85 (June 1, 2015), pp. 135–146. ISSN: 0017-9310. DOI: [10.1016/j.ijheatmasstransfer.2015.01.103](https://doi.org/10.1016/j.ijheatmasstransfer.2015.01.103).
- [5] Géraldine Duhar and Catherine Colin. "Dynamics of bubble growth and detachment in a viscous shear flow". In: *Physics of Fluids* 18.7 (July 2006). Publisher: American Institute of Physics, p. 077101. ISSN: 1070-6631. DOI: [10.1063/1.2213638](https://doi.org/10.1063/1.2213638).
- [6] Carlos E. Estrada-Pérez, Yassin A. Hassan, Bandar Alkhudhiri, and Junsoo Yoo. "Time-resolved measurements of liquid–vapor thermal interactions throughout the full life-cycle of sliding bubbles at subcooled flow boiling conditions". In: *International Journal of Multiphase Flow* 99 (Feb. 1, 2018), pp. 94–110. ISSN: 0301-9322. DOI: [10.1016/j.ijmultiphaseflow.2017.10.002](https://doi.org/10.1016/j.ijmultiphaseflow.2017.10.002).
- [7] H. K. Forster and N. Zuber. "Growth of a Vapor Bubble in a Superheated Liquid". In: *Journal of Applied Physics* 25.4 (Apr. 1954). Publisher: American Institute of Physics, pp. 474–478. ISSN: 0021-8979. DOI: [10.1063/1.1721664](https://doi.org/10.1063/1.1721664).
- [8] W Frost, G. S Dzakowic, and American Society of Mechanical Engineers. *An extension of the method for predicting* [online]. OCLC: 459788171. New York, N.Y.: ASME, 1967.
- [9] J. Garnier, E. Manon, and G. Cubizolles. "LOCAL MEASUREMENTS ON FLOW BOILING OF REFRIGERANT 12 IN A VERTICAL TUBE". In: *Multiphase Science and Technology* 13.1 (2001). Publisher: Begel House Inc. ISSN: 0276-1459, 1943-6181. DOI: [10.1615/MultScienTechn.v13.i1-2.10](https://doi.org/10.1615/MultScienTechn.v13.i1-2.10).
- [10] C. W. M. van der Geld. "The dynamics of a boiling bubble before and after detachment". In: *Heat and Mass Transfer* 45.7 (May 1, 2009), pp. 831–846. ISSN: 1432-1181. DOI: [10.1007/s00231-007-0254-7](https://doi.org/10.1007/s00231-007-0254-7).
- [11] Peng Guan, Li Jia, Liaofei Yin, and Zetao Tan. "Bubble departure size in flow boiling". In: *Heat and Mass Transfer* 51.7 (July 1, 2015), pp. 921–930. ISSN: 1432-1181. DOI: [10.1007/s00231-014-1461-7](https://doi.org/10.1007/s00231-014-1461-7).
- [12] Satish G. Kandlikar and Mark E. Steinke. "Contact angles and interface behavior during rapid evaporation of liquid on a heated surface". In: *International Journal of Heat and Mass Transfer* 45.18 (Aug. 1, 2002), pp. 3771–3780. ISSN: 0017-9310. DOI: [10.1016/S0017-9310\(02\)00090-X](https://doi.org/10.1016/S0017-9310(02)00090-X).
- [13] J. F. Klausner, R. Mei, D. M. Bernhard, and L. Z. Zeng. "Vapor bubble departure in forced convection boiling". In: *International Journal of Heat and Mass Transfer* 36.3 (Feb. 1, 1993), pp. 651–662. ISSN: 0017-9310. DOI: [10.1016/0017-9310\(93\)80041-R](https://doi.org/10.1016/0017-9310(93)80041-R).
- [14] G. Kocamustafaogullari. "Pressure dependence of bubble departure diameter for water". In: *International Communications in Heat and Mass Transfer* 10.6 (Nov. 1, 1983), pp. 501–509. ISSN: 0735-1933. DOI: [10.1016/0735-1933\(83\)90057-X](https://doi.org/10.1016/0735-1933(83)90057-X).
- [15] Artyom Kossolapov. "Experimental Investigation of Subcooled Flow Boiling and CHF at Prototypical Pressures of Light Water Reactors". PhD thesis. Massachusetts Institute of Technology, 2021.
- [16] Sir Horace Lamb. *Hydrodynamics*. Google-Books-ID: d_AoAAAAAYAAJ. University Press, 1895. 632 pp. ISBN: 978-1-4086-1332-0.

- [17] Dominique Legendre, Jacques Borée, and Jacques Magnaudet. "Thermal and dynamic evolution of a spherical bubble moving steadily in a superheated or subcooled liquid". In: *Physics of Fluids* 10.6 (June 1998). Publisher: American Institute of Physics, pp. 1256–1272. ISSN: 1070-6631. DOI: [10.1063/1.869654](https://doi.org/10.1063/1.869654).
- [18] Dominique Legendre and Jacques Magnaudet. "The lift force on a spherical bubble in a viscous linear shear flow". In: *Journal of Fluid Mechanics* 368 (Aug. 1998). Publisher: Cambridge University Press, pp. 81–126. ISSN: 1469-7645, 0022-1120. DOI: [10.1017/S0022112098001621](https://doi.org/10.1017/S0022112098001621).
- [19] Octave Levenspiel. "Collapse of Steam Bubbles in Water". In: *Industrial & Engineering Chemistry* 51.6 (June 1, 1959). Publisher: American Chemical Society, pp. 787–790. ISSN: 0019-7866. DOI: [10.1021/ie50594a045](https://doi.org/10.1021/ie50594a045).
- [20] J. Magnaudet and I. Eames. "The Motion of High-Reynolds-Number Bubbles in Inhomogeneous Flows". In: *Annual Review of Fluid Mechanics* 32.1 (2000). _eprint: <https://doi.org/10.1146/annurev.fluid.32.1.659>, pp. 659–708. DOI: [10.1146/annurev.fluid.32.1.659](https://doi.org/10.1146/annurev.fluid.32.1.659).
- [21] Sandipan Maity. "Effect of Velocity and Gravity on Bubble Dynamics". MSc Thesis. University of California Los Angeles, 2000.
- [22] T. Mazzocco, W. Ambrosini, R. Kommajosyula, and E. Baglietto. "A reassessed model for mechanistic prediction of bubble departure and lift off diameters". In: *International Journal of Heat and Mass Transfer* 117 (Feb. 1, 2018), pp. 119–124. ISSN: 0017-9310. DOI: [10.1016/j.ijheatmasstransfer.2017.09.105](https://doi.org/10.1016/j.ijheatmasstransfer.2017.09.105).
- [23] William H McAdams. *Heat transmission*. OCLC: 683455. New York: McGraw-Hill, 1954.
- [24] Renwei Mei and James F. Klausner. "Unsteady force on a spherical bubble at finite Reynolds number with small fluctuations in the free-stream velocity". In: *Physics of Fluids A: Fluid Dynamics* 4.1 (Jan. 1992). Publisher: American Institute of Physics, pp. 63–70. ISSN: 0899-8213. DOI: [10.1063/1.858501](https://doi.org/10.1063/1.858501).
- [25] Louis Melville Milne-Thomson. *Theoretical Hydrodynamics*. Google-Books-ID: A5hRAAAAMAAJ. Macmillan and Company, limited, 1938. 590 pp.
- [26] M. S. Plesset and S. A. Zwick. "The Growth of Vapor Bubbles in Superheated Liquids". In: *Journal of Applied Physics* 25.4 (Apr. 1954). Number: 4, pp. 493–450. ISSN: 0021-8979.
- [27] H. Reichardt. "Vollständige Darstellung der turbulenten Geschwindigkeitsverteilung in glatten Leitungen". In: *Zeitschrift Angewandte Mathematik und Mechanik* 31 (Jan. 1, 1951). ADS Bibcode: 1951ZaMM...31..208R, pp. 208–219. ISSN: 0044-2267. DOI: [10.1002/zamm.19510310704](https://doi.org/10.1002/zamm.19510310704).
- [28] Tingting Ren, Zhiqiang Zhu, Rui Zhang, Jiangwu Shi, and Changqi Yan. "Development of force balance model for prediction of bubble departure diameter and lift-off diameter in subcooled flow boiling". In: *International Journal of Heat and Mass Transfer* 161 (Nov. 1, 2020), p. 120245. ISSN: 0017-9310. DOI: [10.1016/j.ijheatmasstransfer.2020.120245](https://doi.org/10.1016/j.ijheatmasstransfer.2020.120245).
- [29] V. Scheiff, F. Bergame, J. Sebilleau, P. Ruyer, and C. Colin. "Experimental study of steady and transient subcooled flow boiling". In: *International Journal of Heat and Mass Transfer* 164 (Jan. 1, 2021), p. 120548. ISSN: 0017-9310. DOI: [10.1016/j.ijheatmasstransfer.2020.120548](https://doi.org/10.1016/j.ijheatmasstransfer.2020.120548).
- [30] Pengyu Shi, Roland Rzehak, Dirk Lucas, and Jacques Magnaudet. "Drag and lift forces on a rigid sphere immersed in a wall-bounded linear shear flow". In: *Physical Review Fluids* 6.10 (Oct. 28, 2021). Number: 10 Publisher: American Physical Society, p. 104309. ISSN: 2469-990X.
- [31] Rong Situ, Takashi Hibiki, Mamoru Ishii, and Michitsugu Mori. "Bubble lift-off size in forced convective subcooled boiling flow". In: *International Journal of Heat and Mass Transfer* 48.25 (Dec. 1, 2005), pp. 5536–5548. ISSN: 0017-9310. DOI: [10.1016/j.ijheatmasstransfer.2005.06.031](https://doi.org/10.1016/j.ijheatmasstransfer.2005.06.031).
- [32] Jia-Wen Song and Li-Wu Fan. "Temperature dependence of the contact angle of water: A review of research progress, theoretical understanding, and implications for boiling heat transfer". In: *Advances in Colloid and Interface Science* 288 (Feb. 1, 2021), p. 102339. ISSN: 0001-8686. DOI: [10.1016/j.cis.2020.102339](https://doi.org/10.1016/j.cis.2020.102339).
- [33] R. Sugrue and J. Buongiorno. "A modified force-balance model for prediction of bubble departure diameter in subcooled flow boiling". In: *Nuclear Engineering and Design* 305 (Aug. 15, 2016), pp. 717–722. ISSN: 0029-5493. DOI: [10.1016/j.nucengdes.2016.04.017](https://doi.org/10.1016/j.nucengdes.2016.04.017).

- [34] R. Sugrue, J. Buongiorno, and T. McKrell. "An experimental study of bubble departure diameter in subcooled flow boiling including the effects of orientation angle, subcooling, mass flux, heat flux, and pressure". In: *Nuclear Engineering and Design*. SI : CFD4NRS-4 279 (Nov. 1, 2014), pp. 182–188. ISSN: 0029-5493. DOI: [10.1016/j.nucengdes.2014.08.009](https://doi.org/10.1016/j.nucengdes.2014.08.009).
- [35] Rosemary M. Sugrue. "The Effects of Orientation Angle, Subcooling, Heat Flux, Mass Flux, and Pressure on Bubble Growth and Detachment in Subcooled Flow Boiling". PhD thesis. Massachusetts Institute of Technology, 2012.
- [36] G. E. Thorncroft, J. F. Klausner, and R. Mei. "An experimental investigation of bubble growth and detachment in vertical upflow and downflow boiling". In: *International Journal of Heat and Mass Transfer* 41.23 (Dec. 1, 1998), pp. 3857–3871. ISSN: 0017-9310. DOI: [10.1016/S0017-9310\(98\)00092-1](https://doi.org/10.1016/S0017-9310(98)00092-1).
- [37] G.E. Thorncroft and J.F. Klausner. "Bubble forces and detachment models". In: *Multiphase Science and Technology* 13.3 (2001), pp. 35–76. ISSN: 0276-1459. DOI: [10.1615/multscientechn.v13.i3-4.20](https://doi.org/10.1615/multscientechn.v13.i3-4.20).
- [38] A. Urbano, S. Tanguy, G. Huber, and C. Colin. "Direct numerical simulation of nucleate boiling in micro-layer regime". In: *International Journal of Heat and Mass Transfer* 123 (Aug. 1, 2018), pp. 1128–1137. ISSN: 0017-9310. DOI: [10.1016/j.ijheatmasstransfer.2018.02.104](https://doi.org/10.1016/j.ijheatmasstransfer.2018.02.104).
- [39] W. G. J. Van Helden, C. W. M. Van Der Geld, and P. G. M. Boot. "Forces on bubbles growing and detaching in flow along a vertical wall". In: *International Journal of Heat and Mass Transfer* 38.11 (July 1, 1995), pp. 2075–2088. ISSN: 0017-9310. DOI: [10.1016/0017-9310\(94\)00319-Q](https://doi.org/10.1016/0017-9310(94)00319-Q).
- [40] L. Van Wijngaarden and D. J. Jeffrey. "Hydrodynamic interaction between gas bubbles in liquid". In: *Journal of Fluid Mechanics* 77.1 (Sept. 1976). Publisher: Cambridge University Press, pp. 27–44. ISSN: 1469-7645, 0022-1120. DOI: [10.1017/S0022112076001110](https://doi.org/10.1017/S0022112076001110).
- [41] Junsoo Yoo, Carlos E. Estrada-Perez, and Yassin A. Hassan. "Development of a mechanistic model for sliding bubbles growth prediction in subcooled boiling flow". In: *Applied Thermal Engineering* 138 (June 25, 2018), pp. 657–667. ISSN: 1359-4311. DOI: [10.1016/j.applthermaleng.2018.04.096](https://doi.org/10.1016/j.applthermaleng.2018.04.096).
- [42] Byong-Jo Yun, Andrew Splawski, Simon Lo, and Chul-Hwa Song. "Prediction of a subcooled boiling flow with advanced two-phase flow models". In: *Nuclear Engineering and Design*. SI : CFD4NRS-3 253 (Dec. 1, 2012), pp. 351–359. ISSN: 0029-5493. DOI: [10.1016/j.nucengdes.2011.08.067](https://doi.org/10.1016/j.nucengdes.2011.08.067).
- [43] L. Z. Zeng, J. F. Klausner, and R. Mei. "A unified model for the prediction of bubble detachment diameters in boiling systems— I. Pool boiling". In: *International Journal of Heat and Mass Transfer* 36.9 (Jan. 1, 1993), pp. 2261–2270. ISSN: 0017-9310. DOI: [10.1016/S0017-9310\(05\)80111-5](https://doi.org/10.1016/S0017-9310(05)80111-5).
- [44] Lanying Zeng, Fady Najjar, S. Balachandar, and Paul Fischer. "Forces on a finite-sized particle located close to a wall in a linear shear flow". In: *Physics of Fluids* 21.3 (Mar. 2009). Publisher: American Institute of Physics, p. 033302. ISSN: 1070-6631. DOI: [10.1063/1.3082232](https://doi.org/10.1063/1.3082232).
- [45] Pei Zhou, Ronghua Huang, Sheng Huang, Yu Zhang, and Xiaoxuan Rao. "Experimental investigation on bubble contact diameter and bubble departure diameter in horizontal subcooled flow boiling". In: *International Journal of Heat and Mass Transfer* 149 (Mar. 1, 2020), p. 119105. ISSN: 0017-9310. DOI: [10.1016/j.ijheatmasstransfer.2019.119105](https://doi.org/10.1016/j.ijheatmasstransfer.2019.119105).
- [46] Novak Zuber. "The dynamics of vapor bubbles in nonuniform temperature fields". In: *International Journal of Heat and Mass Transfer* 2.1 (Mar. 1, 1961), pp. 83–98. ISSN: 0017-9310. DOI: [10.1016/0017-9310\(61\)90016-3](https://doi.org/10.1016/0017-9310(61)90016-3).
- [47] H. C. Ünal. "Maximum bubble diameter, maximum bubble-growth time and bubble-growth rate during the subcooled nucleate flow boiling of water up to 17.7 MN/m²". In: *International Journal of Heat and Mass Transfer* 19.6 (June 1, 1976), pp. 643–649. ISSN: 0017-9310. DOI: [10.1016/0017-9310\(76\)90047-8](https://doi.org/10.1016/0017-9310(76)90047-8).

DECLARATION

Put your declaration here.

Paris, December 2022

Luc Favre

COLOPHON

This document was typeset using the typographical look-and-feel `classicthesis` developed by André Miede. The style was inspired by Robert Bringhurst's seminal book on typography "The Elements of Typographic Style". `classicthesis` is available for both L^AT_EX and LyX:

<https://bitbucket.org/amiede/classicthesis/>

Happy users of `classicthesis` usually send a real postcard to the author, a collection of postcards received so far is featured here:

<http://postcards.miede.de/>