



**DEPARTAMENTO DE ELETRÓNICA, TELECOMUNICAÇÕES
E INFORMÁTICA**

MESTRADO EM ENGENHARIA DE COMPUTADORES E TELEMÁTICA

ANO 2021/2022


MODELAÇÃO E DESEMPENHO DE REDES E SERVIÇOS

PRACTICAL GUIDE


Task 1

Consider a multiple choice test such that each question has n possible answers and only one is correct. Assume that the student has studied a percentage p (with $0\% \leq p \leq 100\%$) of the test content. When a question addresses the content the student has studied, he selects the right answer with 100% of probability. Otherwise, the student always selects randomly one of the n answers with a uniform distribution.

- 1.a. When $p = 60\%$ and $n = 4$, determine the probability of the student to select the right answer. Answer: 70%
- 1.b. When $p = 70\%$ and $n = 5$, determine the probability of the student to know the answer when he selects the right answer. Answer: 92.1%
- 1.c. Draw a plot with the same look as the plot below with the probability of the student to select the right answer as a function of the probability p (consider $n = 3, 4$ and 5). What do you conclude from these results? Answer:

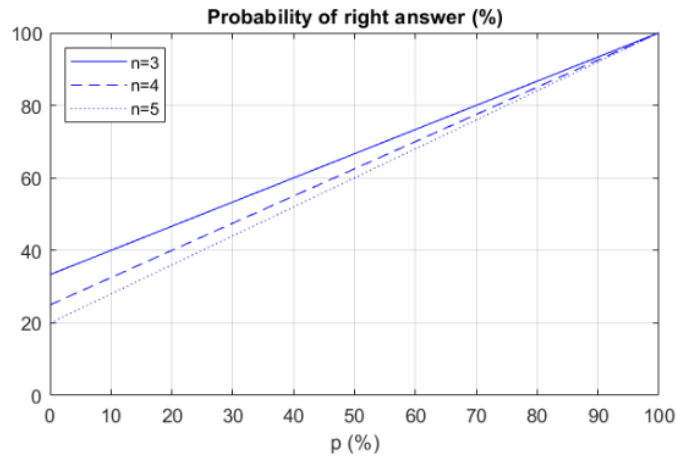


- 1.d. Draw a plot with the same look as the plot below with the probability of the student to know the answer when he selects the right answer as a function of the probability p (consider $n = 3, 4$ and 5). What do you conclude from these results? Answer:

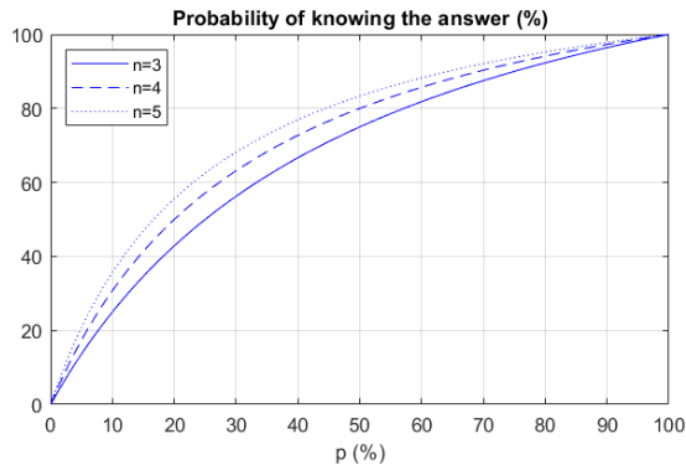


Task 2

Consider a wireless link between multiple stations for data communications with a bit error rate (*ber*) of p . Assume that errors in the different bits of a data packet are statistically independent (i.e., the number of errors of a data packet is a binomial random variable).

- 2.a. Determine the probability of a data packet of 100 Bytes to be received without errors when $p = 10^{-2}$. Answer: 0.0322%
- 2.b. Determine the probability of a data packet of 1000 Bytes to be received with exactly one error when $p = 10^{-3}$. Answer: 0.2676%
- 2.c. Determine the probability of a data packet of 200 Bytes to be received with one or more errors when $p = 10^{-4}$. Answer: 14.7863%
- 2.d. Draw a plot using a logarithmic scale for the X-axis (use the MATLAB function `semilogx`) with the same look as the plot below with the probability of a data packet (of size 100 Bytes, 200 Bytes or 1000 Bytes) being received without errors as a function of the *ber* (from $p = 10^{-8}$ up to $p = 10^{-2}$). What do you conclude from these results? Answer:

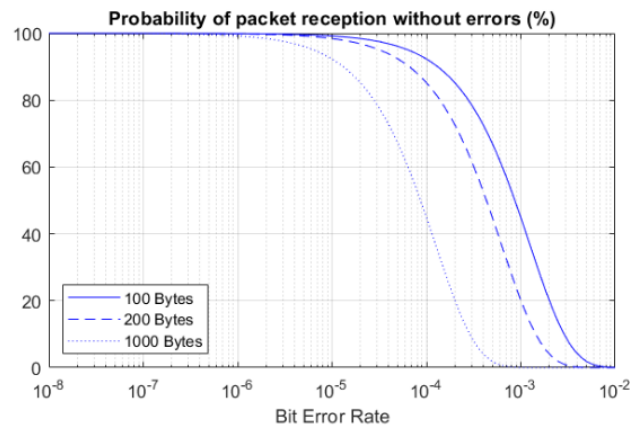


- 2.e. Draw a plot using a logarithmic scale for the Y-axis (use the MATLAB function `semilogy`) with the same look as the plot below with the probability of a data packet being received without errors (for $p = 10^{-4}$, 10^{-3} and 10^{-2}) as a function of the packet size (all integer values from 64 Bytes up to 1518 Bytes). What do you conclude from these results? Answer:

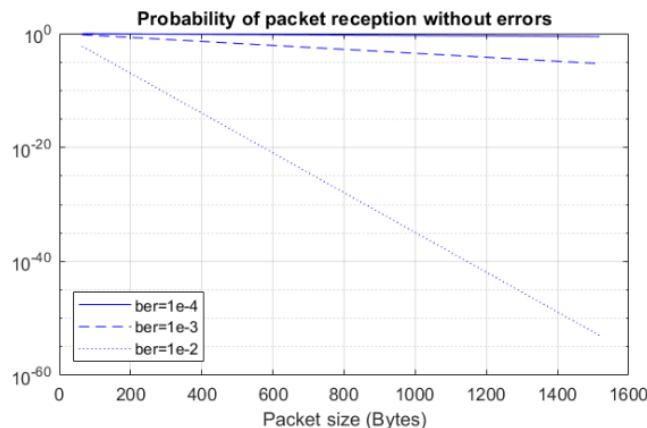


Task 3

Consider a wireless link between multiple stations for data communications. The bit error rate (*ber*) introduced by the wireless link (due to the variation of the propagation and interference factors along with time) is approximately given by the following Markov chain:

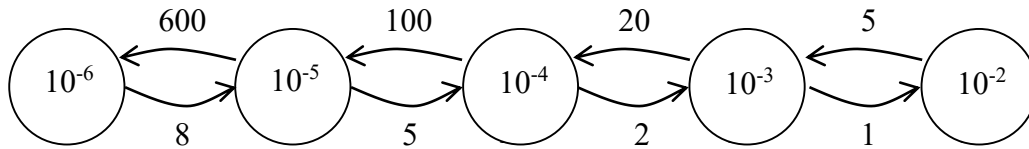

where the state transition rates are in number of transitions per hour. Consider that the link is in an interference state when its *ber* is at least 10^{-3} and in a normal state, otherwise. Assume that all stations detect with a probability of 100% when the data frames sent by the other stations are received with errors. Determine:


- 3.a. the probability of the link being in each of the five states; answer:
 9.86×10^{-1} (10^{-6}), 1.31×10^{-2} (10^{-5}), 6.57×10^{-4} (10^{-4}), 6.57×10^{-5} (10^{-3}), 1.31×10^{-5} (10^{-2})
- 3.b. the average percentage of time the link is in each of the five states; answer:
 9.86×10^{-1} (10^{-6}), 1.31×10^{-2} (10^{-5}), 6.57×10^{-4} (10^{-4}), 6.57×10^{-5} (10^{-3}), 1.31×10^{-5} (10^{-2})
- 3.c. the average *ber* of the link; answer: 1.38×10^{-6}
- 3.d. the average time duration (in minutes) that the link stays in each of the five states; answer: 7.5 (10^{-6}), 0.10 (10^{-5}), 0.59 (10^{-4}), 2.86 (10^{-3}), 12.0 (10^{-2})
- 3.e. the probability of the link being in the normal state and in interference state; answer:
 0.999921 (normal), 7.89×10^{-5} (interference)
- 3.f. the average *ber* of the link when it is in the normal state and when it is in the interference state; answer: 1.18×10^{-6} (normal), 2.50×10^{-3} (interference)
- 3.g. considering a data frame of size B (in Bytes) sent by one source station to a destination station, draw a plot with the same look as the plot below of the probability of the packet being received by the destination station with at least one error as a function of the packet size (from 64 Bytes up to 1500 Bytes); analyze and justify the results; answer:

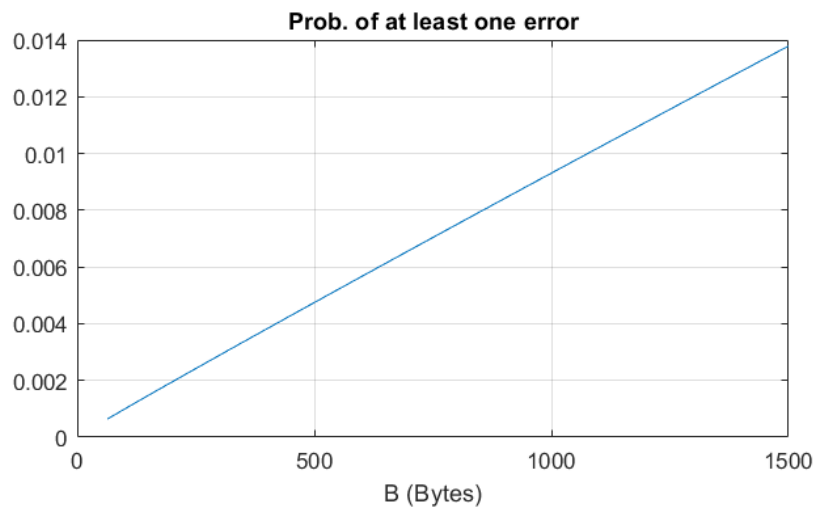

- 3.h.** considering that a data frame of size B (in Bytes) sent by one source station is received with at least one error by the destination station, draw a plot with the same look as the plot below of the probability of the link being in the normal state as a function of the packet size (from 64 Bytes up to 1500 Bytes); analyze and justify the results; answer:



- 3.i.** considering that a data frame of size B (in Bytes) sent by one source station is received without errors by the destination station, draw a plot with the same look as the plot below (use the MATLAB function `semilogy`) of the probability of the link being in the interference state as a function of the packet size (from 64 Bytes up to 1500 Bytes); analyze and justify the results; answer:

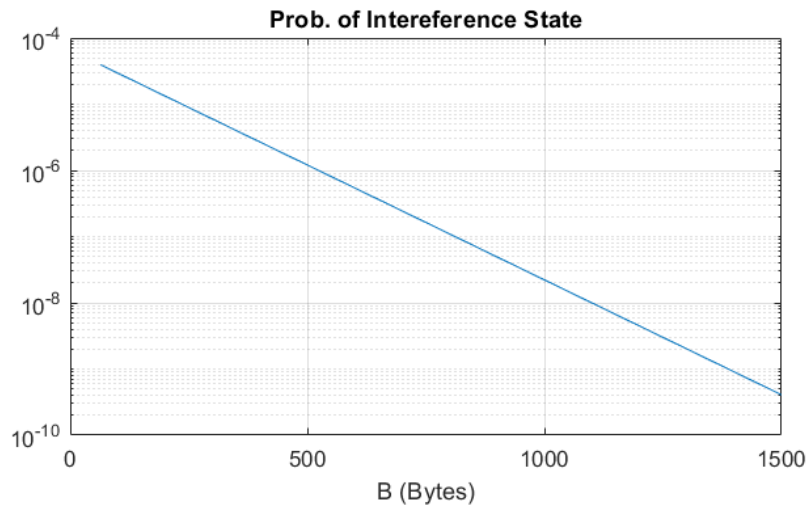


Task 4

Consider an ideal link (i.e., with a $ber = 0$) from one router to another router with a capacity of C Mbps (1 Mbps = 10^6 bps) for IP communications. The link has a propagation delay of $10\ \mu\text{s}$ ($1\ \mu\text{s} = 10^{-6}$ seconds). There is a very large queue at the output port of the link. The IP packet flow supported by the link is characterized by:


- (i) the packet arrivals are a Poisson process with rate λ pps (packets per second)
- (ii) the size of each IP packet is between 64 and 1518 bytes (the size includes the overhead of the Layer 2 protocol) with the probabilities: 19% for 64 bytes, 23% for 110 bytes, 17% for 1518 bytes and an equal probability for all other values (i.e., from 65 to 109 and from 111 to 1517).

Consider that $\lambda = 1000$ pps and $C = 10$ Mbps. Determine:

- 4.a.** the average packet size (in Bytes) and the average packet transmission time of the IP flow; answer: 620.02 Bytes, 4.96×10^{-4} seconds
- 4.b.** the average throughput (in Mbps) of the IP flow; answer: 4.96 Mbps
- 4.c.** the capacity of the link, in pps; answer: 2016.06 pps
- 4.d.** the average packet queuing delay and system packet delay of the IP flow (the system delay is the queuing delay + transmission time + propagation delays); answer: queuing – 4.60×10^{-4} seconds, system – 9.66×10^{-4} seconds
- 4.e.** for $C = 10$ Mbps, draw a plot with the same look as the plot below with the average system delay as a function of the packet arrival rate λ (from $\lambda = 100$ pps up to $\lambda = 2000$ pps); analyze and justify the results;
- 4.f.** for $C = 10, 20$ and 100 Mbps, draw a plot with the same look as the plot below with the average system delay as a function of the packet arrival rate λ (from $\lambda = 100$ pps up to $\lambda = 2000$ pps when $C = 10$, from $\lambda = 200$ pps up to $\lambda = 4000$ pps when $C = 20$ and from $\lambda = 1000$ pps up to $\lambda = 20000$ pps when $C = 100$); the x-axis should indicate the value of λ as a percentage of the capacity of the link, in pps (determined in **4.c.**); analyze and justify the results.

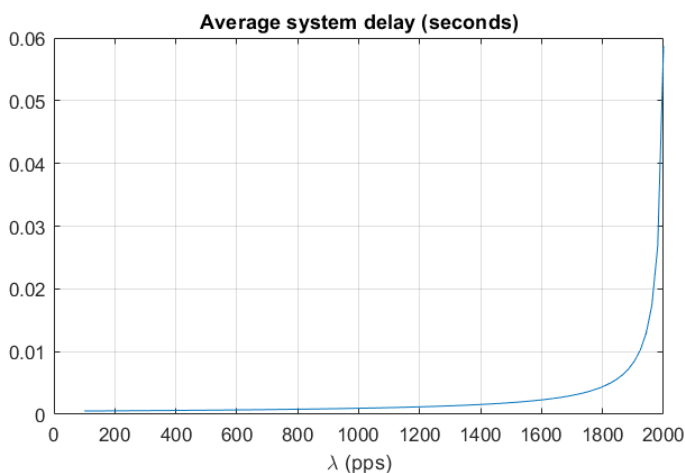

Answer to **4.e.**

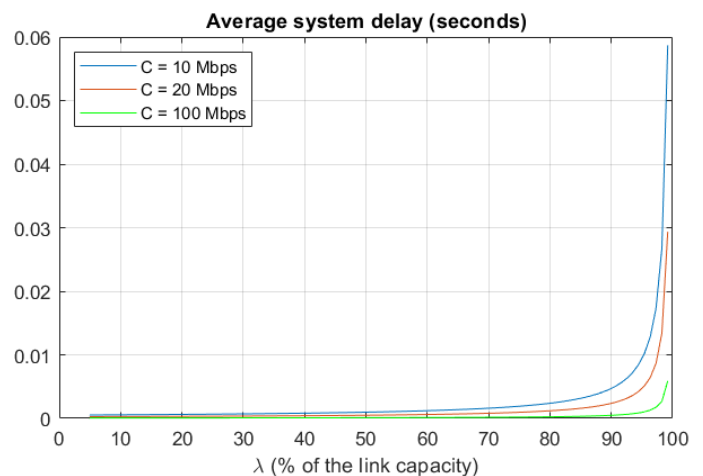

Answer to **4.f.**

Task 5

Consider the event driven simulator, implemented in the provided MATLAB function *Simulator1*, to estimate the performance of a point-to-point IP link between a company router and its ISP (Internet Service Provider). The simulator only considers the downstream direction, *i.e.*, from ISP to the company (usually, the direction with highest traffic load).

Simulator1 considers a link of C (in Mbps) and a queue of size f (in Bytes) with a FIFO (First-In-First-Out) queueing discipline. The packet flow submitted to the link is characterized by: (i) an exponentially distributed time between packet arrivals with average $1/\lambda$ and (ii) a random packet size between 64 and 1518 bytes with the probabilities: 19% for 64 bytes, 23% for 110 bytes, 17% for 1518 bytes and an equal probability for all other values (*i.e.*, from 65 to 109 and from 111 to 1517).

Input parameters of *Simulator1*:

- λ – packet rate, in packets per second (pps)
- C – link capacity, in Mbps
- f – queue size, in Bytes
- P – total number of transmitted packets of a simulation run

Performance parameters estimated by *Simulator1*:

- PL – Packet Loss (%)
- APD – Average Packet Delay (milliseconds)
- MPD – Maximum Packet Delay (milliseconds)
- TT – Transmitted Throughput (Mbps)

Stopping criterion of *Simulator1*:

- Time instant when the link ends the transmission of the P^{th} packet (P is one of the input parameter); in *Simulator1*, the queued packets at the end of the simulation do not count for the performance estimation.

Simulator1 is based on the following variables:

Events: ARRIVAL (the arrival of a packet) and DEPARTURE (the transmission end of a packet).

State variables: STATE (binary variable indicating if the link is free or busy with the transmission of a packet), QUEUEOCCUPATION (occupation of the queue, in number of bytes, with the queued packets) and QUEUE (matrix with a variable number of rows and 2 columns where each column has the size and the arriving time instant of each packet in the queue).

Statistical counters: TOTALPACKETS (number of packets arrived to the system), LOSTPACKETS (number of packets dropped due to buffer overflow), TRANSMITTEDPACKETS (number of transmitted packets), TRANSMITTEDBYTES (sum of the bytes of the transmitted packets), DELAYS (sum of the delays of the transmitted packets), MAXDELAY (maximum delay among all transmitted packets).

Based on the statistical counters, the performance parameters are estimated at the end as:

$$PL = 100 \times \text{LOSTPACKETS} / \text{TOTALPACKETS}$$

$$APD = 1000 \times \text{DELAYS} / \text{TRANSMITTEDPACKETS}$$

$$MPD = 1000 \times \text{MAXDELAY}$$

$$TT = 10^{-6} \times \text{TRANSMITTEDBYTES} \times 8 / \text{total simulated time}$$

- 5.a.** Develop a MATLAB script to run *Simulator1* 10 times with a stopping criterion of $P = 10000$ at each run and to compute the estimated values and the 90% confidence intervals of all performance parameters when $\lambda = 1800$ pps, $C = 10$ Mbps and $f = 1.000.000$ Bytes (~1 MByte). Results (recall that these are simulation results):

```
PacketLoss (%)           = 0.00e+00 +- 0.00e+00
Av. Packet Delay (ms)    = 4.67e+00 +- 3.07e-01
Max. Packet Delay (ms)   = 2.54e+01 +- 2.90e+00
Throughput (Mbps)        = 8.94e+00 +- 6.68e-02
```

- 5.b.** Repeat the previous experiment but now run *Simulator1* 100 times. Compare these results with the previous ones and take conclusions. Results (recall that these are simulation results):

```
PacketLoss (%)           = 0.00e+00 +- 0.00e+00
Av. Packet Delay (ms)    = 4.32e+00 +- 1.01e-01
Max. Packet Delay (ms)   = 2.27e+01 +- 7.71e-01
Throughput (Mbps)        = 8.93e+00 +- 1.82e-02
```

- 5.c.** Repeat the experiment **5.b** but now consider $f = 10.000$ Bytes (~10 KBytes) Justify the differences between these results and the results of experiment **5.b**. Results (recall that these are simulation results):

```
PacketLoss (%)           = 1.01e+00 +- 3.56e-02
Av. Packet Delay (ms)    = 2.95e+00 +- 2.39e-02
Max. Packet Delay (ms)   = 8.99e+00 +- 1.90e-02
Throughput (Mbps)        = 8.75e+00 +- 1.60e-02
```

- 5.d.** Repeat the experiment **5.c** but now consider $f = 2.000$ Bytes (~2 KBytes) Justify the differences between these results and the results of experiments **5.b** and **5.c**. Results (recall that these are simulation results):

```
PacketLoss (%)           = 1.04e+01 +- 5.17e-02
Av. Packet Delay (ms)    = 9.54e-01 +- 1.59e-03
Max. Packet Delay (ms)   = 2.71e+00 +- 7.85e-03
Throughput (Mbps)        = 7.12e+00 +- 1.02e-02
```

- 5.e.** Consider that the system is modelled by a $M/G/1$ queueing model¹. Determine the theoretical values of the packet loss, average packet delay and total throughput using the $M/G/1$ model for the parameters considered in experiments **5.a** and **5.b**. Compare these values with the simulation results of experiments **5.a** and **5.b** and take conclusions. Results:

```
Packet Loss (%)          = 0.0000
Av. Packet Delay (ms)    = 4.3883
Throughput (Mbps)        = 8.9283
```

¹ In Module 1 of the theoretical slides, check the $M/G/1$ queueing model (slide 58) and the resolution of Example 9 (slide 65).

Task 6

In the previous Task 5, it was assumed that the link between the company router and its ISP (Internet Service Provider) does not introduce transmission/propagation errors (the typical case of a wired access network). In this task, assume that the link is provided by a wireless access (for example, through a 4G/5G mobile network). In this case, when a packet reaches the company router with at least one error, the packet is discarded (recall the FCS field of IEEE 802 frames).

- 6.a.** Develop *Simulator2* by changing the provided *Simulator1* in order to consider that the link introduces a BER (Bit Error Rate) given by b . The input parameters of *Simulator2* should be all the input parameters of *Simulator1* plus parameter b . The performance parameters estimated by *Simulator2* should be the same as the ones of *Simulator1*. The stopping criterion of *Simulator2* should be time instant when the link ends the transmission of the P^{th} packet without errors (i.e., the packets with errors do not count for the stopping criterion)
- 6.b.** Develop a MATLAB script to run *Simulator2* 100 times with a stopping criterion of $P = 10000$ at each run and to compute the estimated values and the 90% confidence intervals of all performance parameters when $\lambda = 1800$ pps, $C = 10$ Mbps, $f = 1.000.000$ Bytes (~1 MByte) and $b = 10^{-6}$. Compare these results with the results of **5.b** and take conclusions. Results (recall that these are simulation results):

```
PacketLoss (%)           = 4.91e-01 +- 1.22e-02
Av. Packet Delay (ms)    = 4.34e+00 +- 1.23e-01
Max. Packet Delay (ms)   = 2.24e+01 +- 8.72e-01
Throughput (Mbps)        = 8.85e+00 +- 2.03e-02
```

- 6.c.** Repeat the experiment **6.b** but now consider $f = 10.000$ Bytes (~10 KBytes) Justify the differences between these results and the results of experiment **5.c**. Results (recall that these are simulation results):

```
PacketLoss (%)           = 1.49e+00 +- 3.68e-02
Av. Packet Delay (ms)    = 2.95e+00 +- 2.05e-02
Max. Packet Delay (ms)   = 8.97e+00 +- 1.76e-02
Throughput (Mbps)        = 8.68e+00 +- 1.45e-02
```

- 6.d.** Repeat the experiment **6.c** but now consider $f = 2.000$ Bytes (~2 KBytes) Justify the differences between these results and the results of experiment **5.d**. Results (recall that these are simulation results):

```
PacketLoss (%)           = 1.08e+01 +- 5.83e-02
Av. Packet Delay (ms)    = 9.50e-01 +- 1.89e-03
Max. Packet Delay (ms)   = 2.70e+00 +- 7.42e-03
Throughput (Mbps)        = 7.04e+00 +- 1.10e-02
```

Task 7

In Task 5, it was assumed that the link between the company router and its ISP supports a flow of data packets. In this task, consider that, besides the flow of data packets, the link also supports n VoIP (Voice over IP) packet flows. Each VoIP flow generates packets with size uniformly distributed between 110 Bytes and 130 Bytes, and the time between packet arrivals is uniformly distributed between 16 milliseconds and 24 milliseconds².

7.a. Develop *Simulator3* by changing the provided *Simulator1* in order to consider the n additional VoIP packet flows³. Consider that packets of all flows (data and VoIP) are queued on a single queue served with a FIFO discipline. The input parameters of *Simulator3* should be all the input parameters of *Simulator1* plus parameter n . The performance parameters estimated by *Simulator3* should be:

- PL_{data} – Packet Loss of data packets (%)
- PL_{VoIP} – Packet Loss of VoIP packets (%)
- APD_{data} – Average Delay of data packets (milliseconds)
- APD_{VoIP} – Average Delay of VoIP packets (milliseconds)
- MPD_{data} – Maximum Delay of data packets (milliseconds)
- MPD_{VoIP} – Maximum Delay of VoIP packets (milliseconds)
- TT – Transmitted Throughput (data + VoIP) (Mbps)

7.b. Develop a MATLAB script to run *Simulator3* 100 times with a stopping criterion of $P = 10000$ at each run and to compute the estimated values and the 90% confidence intervals of all performance parameters when $\lambda = 1800$ pps, $C = 10$ Mbps, $f = 1.000.000$ Bytes (~1 MByte) and $n = 20$.

```
PacketLoss of data (%)           = 0.00e+00 +- 0.00e+00
PacketLoss of VoIP (%)          = 0.00e+00 +- 0.00e+00
Av. Packet Delay of data (ms)   = 2.03e+01 +- 1.94e+00
Av. Packet Delay of VoIP (ms)   = 1.99e+01 +- 1.95e+00
Max. Packet Delay of data (ms)  = 5.34e+01 +- 3.50e+00
Max. Packet Delay of VoIP (ms)  = 5.30e+01 +- 3.49e+00
Throughput (Mbps)               = 9.82e+00 +- 1.77e-02
```

7.c. Repeat the experiment **7.b** but now consider $f = 10.000$ Bytes (~10 KBytes) Justify the differences between these results and the results of experiment **7.b**. Results (recall that these are simulation results):

```
PacketLoss of data (%)           = 2.62e+00 +- 8.52e-02
PacketLoss of VoIP (%)          = 3.63e-01 +- 2.27e-02
Av. Packet Delay of data (ms)   = 3.99e+00 +- 3.91e-02
Av. Packet Delay of VoIP (ms)   = 3.67e+00 +- 4.03e-02
```

² These values are based on G.726 standard, at 32 kbps, assuming a packet size of ± 10 Bytes with a uniform distribution around its average size and a jitter of ± 4 milliseconds with a uniform distribution around the average inter arrival time of 20 milliseconds.

³ In the implementation of *Simulator3*, the time instant of the first packet arrival of each VoIP flow must be randomly generated with a uniform distribution between 0 and 20 milliseconds.

Max. Packet Delay of data (ms) = 9.01e+00 +- 1.27e-02
 Max. Packet Delay of VoIP (ms) = 8.78e+00 +- 1.87e-02
 Throughput (Mbps) = 9.42e+00 +- 1.60e-02

- 7.d.** Repeat the experiment **7.c** but now consider $f = 2.000$ Bytes (~2 KBytes) Justify the differences between these results and the results of experiment **7.b** and **7.c**. Results (recall that these are simulation results):

PacketLoss of data (%) = 1.26e+01 +- 7.96e-02
 PacketLoss of VoIP (%) = 1.97e+00 +- 4.20e-02
 Av. Packet Delay of data (ms) = 9.88e-01 +- 2.26e-03
 Av. Packet Delay of VoIP (ms) = 7.41e-01 +- 2.60e-03
 Max. Packet Delay of data (ms) = 2.71e+00 +- 7.36e-03
 Max. Packet Delay of VoIP (ms) = 2.59e+00 +- 1.14e-02
 Throughput (Mbps) = 7.74e+00 +- 1.23e-02

- 7.e.** Develop *Simulator4* by changing *Simulator3* so that VoIP packets are given higher priority than data packets in the queue. Develop a MATLAB script to run *Simulator4* 100 times with a stopping criterion of $P = 10000$ at each run and to compute the estimated values and the 90% confidence intervals of all performance parameters when $\lambda = 1800$ pps, $C = 10$ Mbps, $f = 1.000.000$ Bytes (~1 MByte) and $n = 20$. Compare these results with the results of **7.b** and take conclusions. Results (recall that these are simulation results):

PacketLoss of data (%) = 0.00e+00 +- 0.00e+00
 PacketLoss of VoIP (%) = 0.00e+00 +- 0.00e+00
 Av. Packet Delay of data (ms) = 2.35e+01 +- 2.34e+00
 Av. Packet Delay of VoIP (ms) = 5.59e-01 +- 1.39e-03
 Max. Packet Delay of data (ms) = 5.95e+01 +- 3.76e+00
 Max. Packet Delay of VoIP (ms) = 1.38e+00 +- 4.31e-03
 Throughput (Mbps) = 9.83e+00 +- 2.01e-02

- 7.f.** Repeat the experiment **7.e** but now consider $f = 10.000$ Bytes (~10 KBytes). Compare these results with the results of **7.c** and take conclusions. Results (recall that these are simulation results):


PacketLoss of data (%) = 2.66e+00 +- 6.99e-02
 PacketLoss of VoIP (%) = 3.45e-01 +- 2.47e-02
 Av. Packet Delay of data (ms) = 4.36e+00 +- 3.71e-02
 Av. Packet Delay of VoIP (ms) = 5.34e-01 +- 1.61e-03
 Max. Packet Delay of data (ms) = 9.96e+00 +- 2.58e-02
 Max. Packet Delay of VoIP (ms) = 1.38e+00 +- 4.83e-03
 Throughput (Mbps) = 9.43e+00 +- 1.52e-02

- 7.g.** Repeat the experiment **7.f** but now consider $f = 2.000$ Bytes (~2 KBytes). Compare these results with the results of **7.d** and take conclusions. Results (recall that these are simulation results):

PacketLoss of data (%)	= 1.27e+01 +- 6.47e-02
PacketLoss of VoIP (%)	= 1.63e+00 +- 4.18e-02
Av. Packet Delay of data (ms)	= 1.04e+00 +- 2.24e-03
Av. Packet Delay of VoIP (ms)	= 4.34e-01 +- 1.14e-03
Max. Packet Delay of data (ms)	= 2.94e+00 +- 1.67e-02
Max. Packet Delay of VoIP (ms)	= 1.38e+00 +- 5.71e-03
Throughput (Mbps)	= 7.73e+00 +- 1.15e-02

Task 8

Consider the MPLS (Multi-Protocol Label Switching) network of an ISP (Internet Service Provider) with a topology defined over a rectangle with 600 Km by 300 Km:

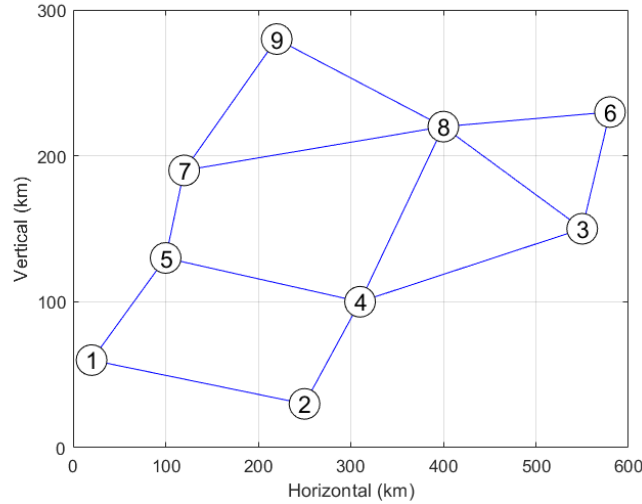

The length of all links is provided by the square matrix L . Assume that all routers are of very high availability (i.e., their availability is 1.0). To compute the availability of each link as a square matrix A assuming the model considered in *J.-P. Vasseur, M. Pickavet and P. Demeester, "Network Recovery: Protection and Restoration of Optical, SONET-SDH, IP, and MPLS", Elsevier (2004)*, use the following MATLAB code:

```
MTBF= (450*365*24) ./L;
A= MTBF ./ (MTBF + 24) ;
A(isnan(A))= 0;
```

Consider a unicast service with the following flows (throughput values b_t and \underline{b}_t in Gbps):

t	o_t	d_t	b_t	\underline{b}_t
1	1	3	1.0	1.0
2	1	4	0.7	0.5
3	2	7	3.4	2.5
4	3	4	2.4	2.1
5	4	9	2.0	1.4
6	5	6	1.2	1.5
7	5	8	2.1	2.7
8	5	9	2.6	1.9

Based on the provided MATLAB code, develop MATLAB scripts to compute the following requests.

- 8.a.** For each flow, compute the most available path (and its availability value).
- 8.b.** Assume that the most available path computed in the previous request is the first routing path of each flow. For each flow, compute a second routing path given by the most available path which is link disjoint with the previously computed first routing path.

- 8.c.** Compute how much bandwidth is required on each link to support all flows with 1+1 protection using the previous computed pairs of link disjoint paths. Compute also the total bandwidth required on all links.
- 8.d.** Compute how much bandwidth is required on each link to support all flows with 1:1 protection using the previous computed pairs of link disjoint paths. Compute also the total bandwidth required on all links. Compare these results with the results of **8.c.**
- NOTE: You need to compute the required bandwidth on each link for the case of no failures and for all cases of single link failures; then, the bandwidth required on each link is the maximum required bandwidth among all cases.