

承認書

SPECIFICATION FOR APPROVAL

CUSTOMER : 詮盛
MODEL NAME : POWER TRANSFORMER
CUSTOMER P/N : T2
L.T.E. PART NO. : _____
DATE : 2009.02.09.

核 准 APPROVED	校 對 CHECKED	承 辦 ISSUED
劉易鑫	劉月鳳	邱若婷



客 戶 承 認 FOR CUSTOMER APPROVAL	
簽 名 SIGNATURE	日 期 DATE



力英電子股份有限公司
Li Tone Electronics (L.T.E.) Co., Ltd
臺北縣三峽鎮介壽路1段311巷29號
No.29, Lane 311, Sec 1, JieSou Rd.
Sanhsia, Taipei, Taiwan 237
<http://www.LTE.com.tw>

TEL:+886-2-2673-2512
FAX:+886-2-2671-0294
+886-2-2671-9331
+886-2-8671-3701

1.SCHEMATICS.

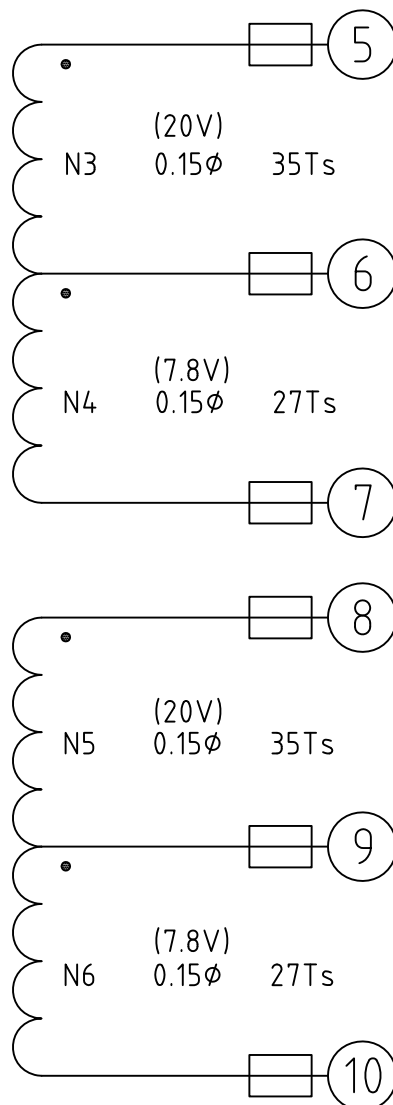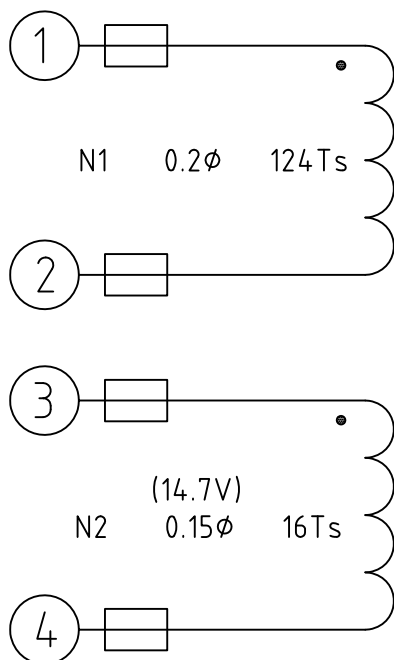

CUSTOMER: 詮盛電子

CUSTOMER ISSUE: A

APPROVED BY: 劉易鑫

PART NO. T2

LTE ISSUE: 0.0

CHECKED BY: 劉月鳳

DATE: 2009.02.09.

PAGE: 1/4

DRAWN BY: 邱若婷




力英電子股份有限公司
LI TONE ELECTRONICS CO., LTD.
台北縣三峽鎮介壽路1段311巷29號
NO. 29, LANE 311, JIE SOU RD., SEC 1. SANHSIA
TOWN TAIPEI HSIEN, TAIWAN R. O. C.

TEL:
(02)2673-2512~6

FAX:
886-2-26710294
886-2-26736329

2.WINDING SEQUENCE.

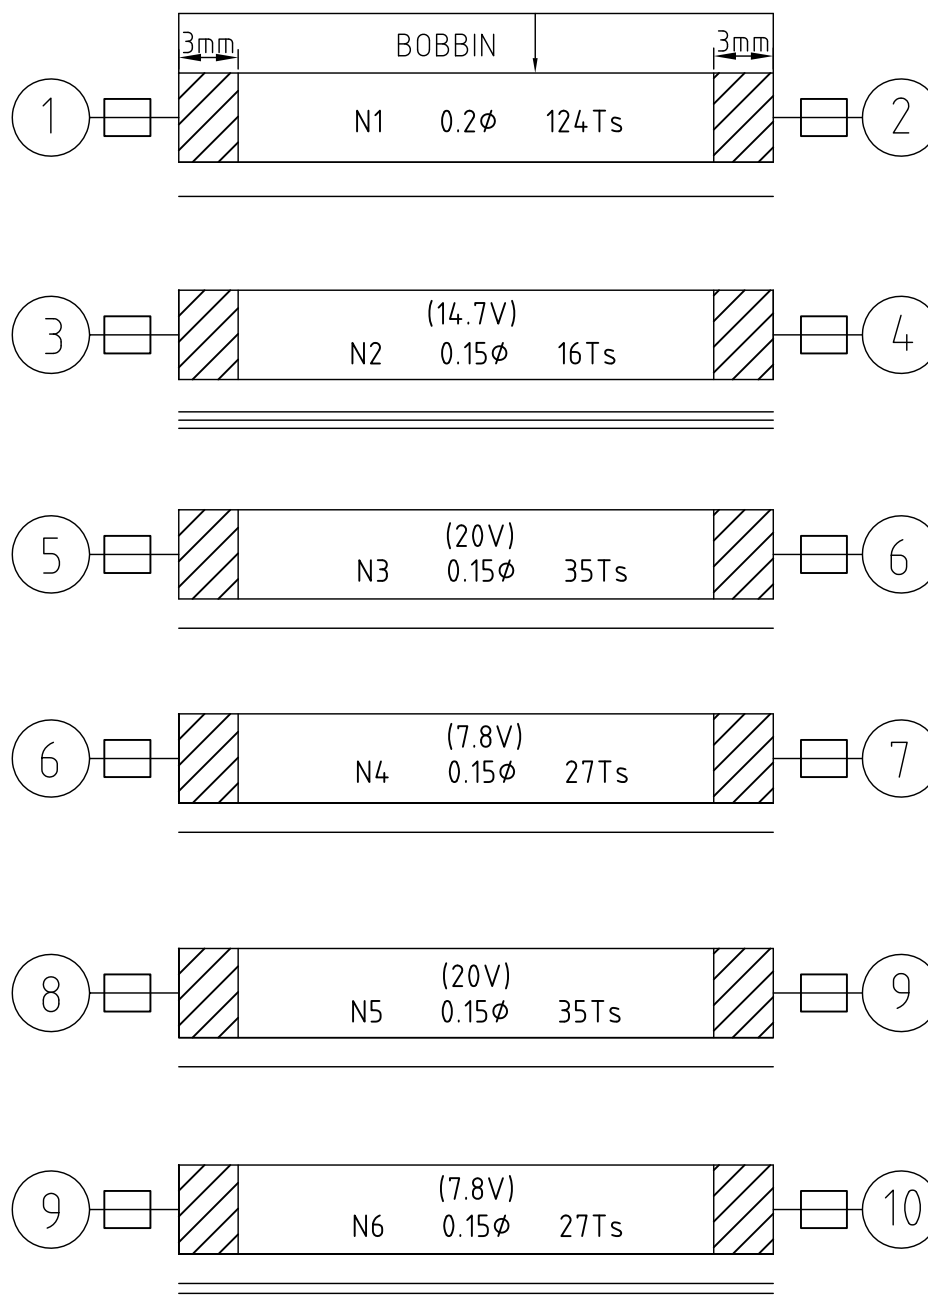

CUSTOMER: 詮盛電子

CUSTOMER ISSUE: A

APPROVED BY: 劉易鑫

PART NO. T2

LTE ISSUE: 0.0

CHECKED BY: 劉月鳳

DATE: 2009.02.09.

PAGE: 2/4

DRAWN BY: 邱若婷



力英電子股份有限公司
LI TONE ELECTRONICS CO., LTD.
台北縣三峽鎮介壽路1段311巷29號
NO. 29, LANE 311, JIE SOU RD., SEC 1. SANHSIA
TOWN TAIPEI HSIEN, TAIWAN R. O. C.

TEL:
(02)2673-2512~6

FAX:
886-2-26710294
886-2-26736329



3.MATERIAL LIST.

N0/ITEM	MATERIAL	MAKER
3-1.CORE	EPC-19 FERRITE CORE. PC40 .3C90.	TDK. FERROXCUBE.
3-2.BOBBIN	EPC-19 H. TYPE W / 11 PINS PHENOLIC/T375J HY-1906.	CHANG CHUN PLASTICS CO.LTD UL NO.E59481. HSIN YUNG PLASTIC INDUSTRIAL CO, LTD.
3-3.WIRE	DD-NYU (2UEW) 130°C	PACIFIC ELECTRIC WIRE & CABLE CO. UL NO.E84081. TAI-I COPPER(DUANGZHOU)CO.,LTD UL NO.E85640.
3-4.TAPE	POLYESTER TAPE. #1350F-1.#44.	3M COMPANY UL NO.E17385.
3-5.VARNISH	V1630FS	ELANTAS ELECTRICAL INSULATION ELANTAS PDG ING UL NO.E87039.
3-6.TUBING	PTFE / TFL / 150V	GREAT HOLDING IND CO, LTD. UL NO.E156256
3-7.SOLDER	PURE TIN SAC300,SAC305,SC9937	ALPHA SOLDER CO.,LTD.


*ROHS COMPLIANT(無鉛製程)

4.ELECTRICAL SPECIFICATION.


- 4-1.INDUCTANCE.(P1-2) 1.2mH \pm 10%. @1 KHZ 0.25V HP-4284. GOM-801G.
- 4-2.D.C.RESISTANCE.(P1-2) 2.3 Ω MAX.GOM-801G.
- 4-3.INSULATION RESISTANCE.WDG TO WDG AND WDG TO CORE BY 500VDC 100M Ω MIN.
- 4-4.HI-POT TEST.PRI TO SEC BY 1000VAC /3SEC@5mA.
PRI TO CORE BY 500 VAC /3SEC @5mA.
SEC TO CORE BY 500 VAC /3SEC @5mA.

CUSTOMER: 詮盛電子		CUSTOMER ISSUE: A	APPROVED BY: 劉易鑫
PART NO. T2		LTE ISSUE: 0.0	CHECKED BY: 劉月鳳
		DATE: 2009.02.09.	PAGE: 3/4
		DRAWN BY: 邱若婷 TEL: (02)2673-2512~6 FAX: 886-2-26710294 886-2-26736329	


5.CONFIGURATION & DIMENSION.(UNIT:mm)

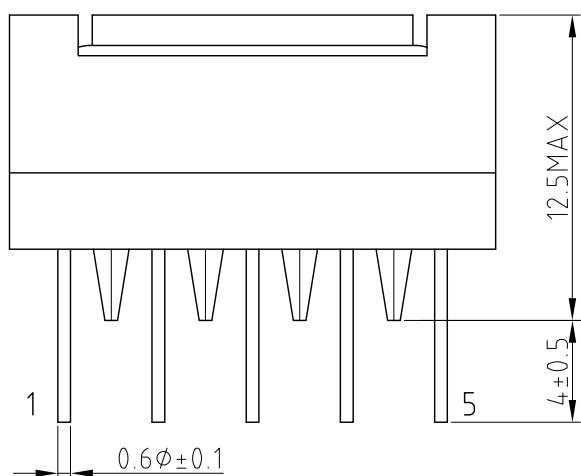

(FRONT VIEW)

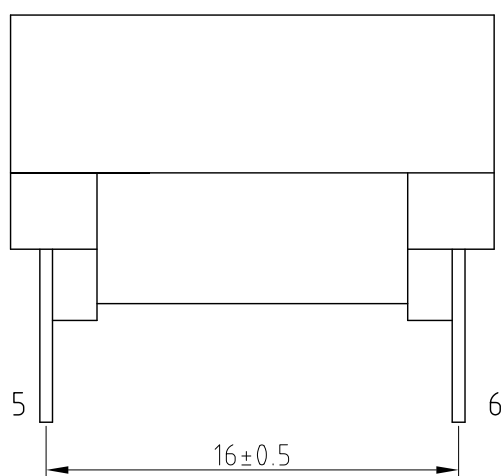

(SIDE VIEW)

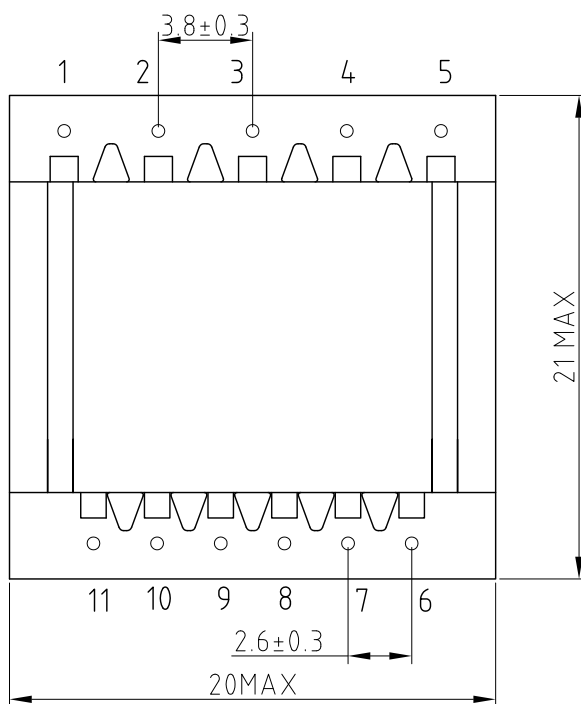

(BOTTOM VIEW)

*PIN 1點白點.

*MARKING:

T2

LTE YYWW

*成品高度限定12.5MAX.

CUSTOMER: 詮盛電子

CUSTOMER ISSUE: A

APPROVED BY: 劉易鑫

PART NO. T2

LTE ISSUE: 0.0

CHECKED BY: 劉月鳳

DATE: 2009.02.09.

PAGE: 4/4

DRAWN BY: 邱若婷



力英電子股份有限公司
LI TONE ELECTRONICS CO., LTD.
台北縣三峽鎮介壽路1段311巷29號
NO. 29, LANE 311, JIE SOU RD., SEC 1. SANHSIA
TOWN TAIPEI HSIEN, TAIWAN R. O. C.

TEL:
(02)2673-2512~6

FAX:
886-2-26710294
886-2-26736329