


## Configuration and verification of a standard access list for permit and deny to a remote server.

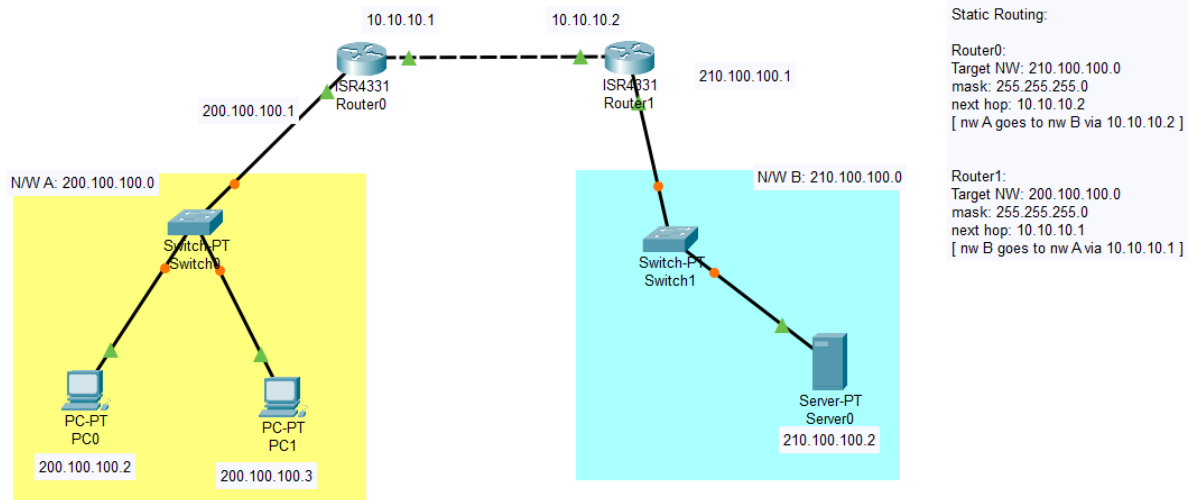

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 210.100.100.2

Pinging 210.100.100.2 with 32 bytes of data:

Reply from 210.100.100.2: bytes=32 time<1ms TTL=126
Reply from 210.100.100.2: bytes=32 time=1ms TTL=126
Reply from 210.100.100.2: bytes=32 time<1ms TTL=126
Reply from 210.100.100.2: bytes=32 time<1ms TTL=126

Ping statistics for 210.100.100.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 210.100.100.2

Pinging 210.100.100.2 with 32 bytes of data:

Reply from 10.10.10.2: Destination host unreachable.
Reply from 10.10.10.2: Destination host unreachable.
Reply from 10.10.10.2: Destination host unreachable.
Reply from 10.10.10.2: Destination host unreachable.

Ping statistics for 210.100.100.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

☐ Top

