
Bus types
General purpose bus
Ignition
Injection
Analog inputs (sensors)
Discrete inputs
LS & HS outputs
DC Motor

M5
Module-wbo-0.6
5569-06A2
J3
J6
Conn_01x06
M7
Module-can-0.1
5569-18A2
J5
Pin Name Recommended function
B8 OUT_LS_HOT2 Fan Relay
B9 OUT_LS_HOT1 Main Relay
B16 OUT_LS4 Fuel Pump Replay
B18 OUT_LS2 Idle Air Valve
C8 GND VR Shield
C15 IN_AUX3 Fuel Pressure
D10 IN_BUTTON2 A/C Request
All inputs are 12V-tolerant
Ignition
LS HOT
3.5A MAX Always hot capable
Injector
LS
3.5A MAX Solenoid load capable
DC Driver 1
DC Driver 2
Flyback diodes
M6
Module:mega-mcu100/0.3
uSD card and accelerometer on SPI1 bus
Barometer on this I2C bus
F40x does not have UART8
Internal TC2030 connector
Internal buttons
Move the resistor from position R143 to R145 to enable the CAN WAKEUP function. The AUX1 analog input will be unavailable.
Move the resistor from position R6 to R5 to use ADC3 for receiving the analog signal VR-DISCRETE instead of the knock signal
M3
Module-vr-discrete-0.5
Install R770 for use with very hot VR signals, to dampen the signal
M4
Module-vr-max9924-0.1
Install R775 for use with very hot VR signals, to dampen the signal
Pin 8 may be used for shielding VR signals
Install a 4.7 kOhm R1 resistor for using VR2- as a hall sensor input
M2
Module-knock-0.2
M1
Module-power_12and5V-0.3
Configurable "BUTTON" pulls
1N4148WS CR1220
Bluetooth Module
Hellen-One-PCB-logo
https://rusefi.com/s/uaefi
rusEFI.com
Sheet: /
File: uaefi.kicad_sch
Title: UAEFI
Size: A3 | Date: 2026-09-01 | Rev: F3
KiCad E.D.A. 10.0.7 | Id: 1/9

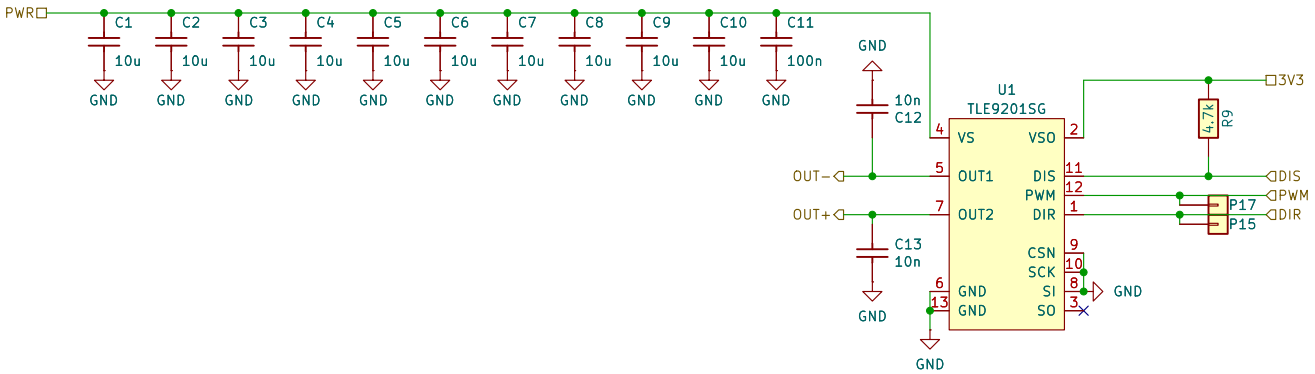


rusEFI.com

Sheet: /DC Driver 1/
File: DC_MOTOR_0.1.kicad_sch

Title: UAEFI

Size: A4	Date: 2026-07-14	**Rev: F3**
KiCad E.D.A. 10.0.7		Id: 2/9

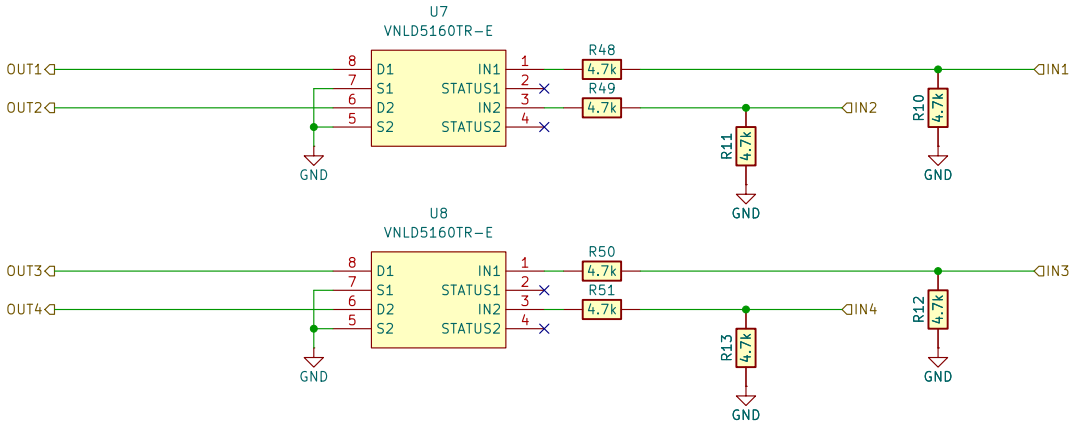


rusEFI.com

Sheet: /LS/
File: LS4.kicad_sch

Title: UAEFI

Size: A4	Date: 2026-07-14	**Rev: F3**
KiCad E.D.A. 10.0.7		Id: 3/9

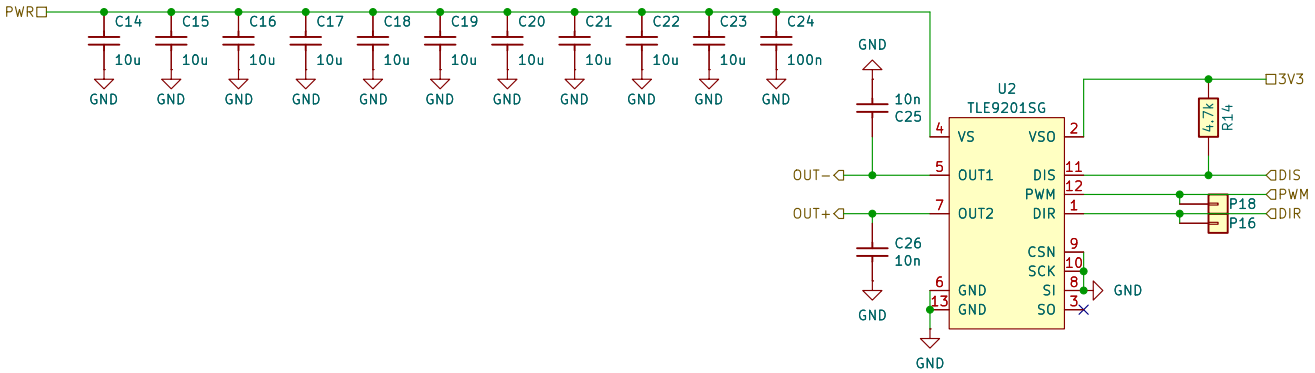


rusEFI.com


Sheet: /DC Driver 2/
File: DC_MOTOR_0.1.kicad_sch

Title: UAEFI

Size: A4	Date: 2026-07-14	**Rev: F3**
KiCad E.D.A. 10.0.7		Id: 4/9

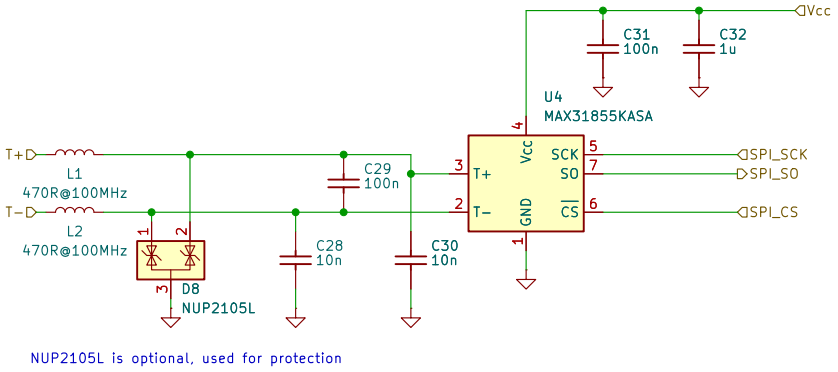

rusEFI.com		
Sheet: /EGT/		
File: egt.kicad_sch		
Title: UAEFI		
Size: A4	Date: 2026-07-14	**Rev: F3**
KiCad E.D.A. 10.0.7		Id: 5/9

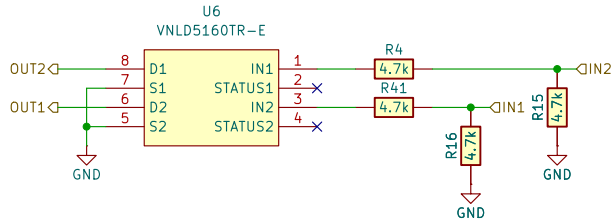


rusEFI.com

Sheet: /LS HOT/
File: LS_HOT.kicad_sch

Title: UAEFI

Size: A4	Date: 2026-07-14	**Rev: F3**
KiCad E.D.A. 10.0.7		Id: 6/9




rusEFI.com

Sheet: /MAP/
File: MAP.kicad_sch

Title: UAEFI

Size: A4	Date: 2026-07-14	**Rev: F3**
KiCad E.D.A. 10.0.7		Id: 8/9

Remove R20–R22, R26–R28, and install Q7–Q12 for use with dumb coils

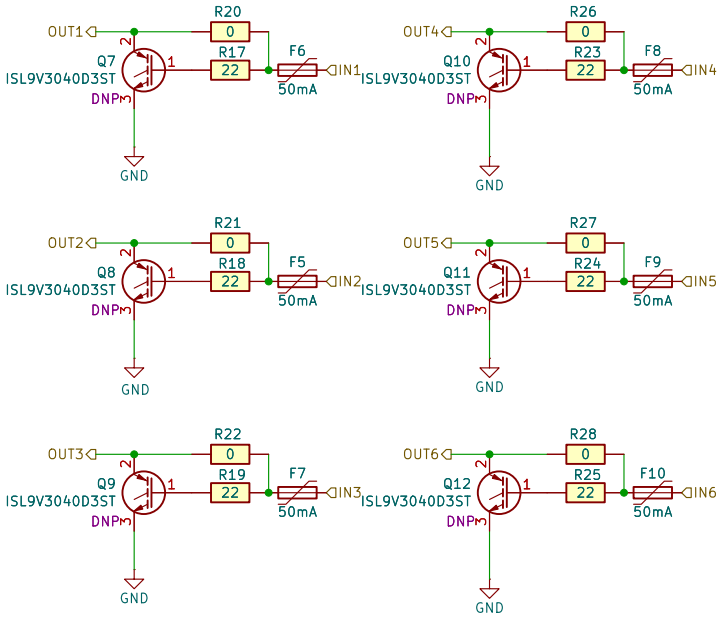


rusEFI.com

Sheet: /Ignition/
File: IGN6.kicad_sch

Title: UAEFI

Size: A4	Date: 2026-07-14	**Rev: F3**
KiCad E.D.A. 10.0.7		Id: 9/9

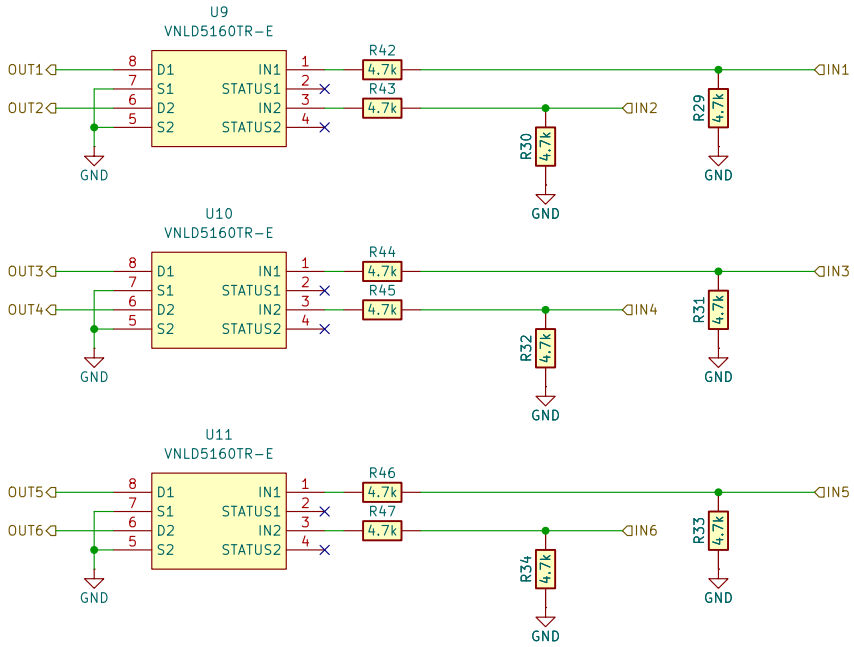

rusEFI.com

Sheet: /Injector/
File: INJ6.kicad_sch

Title: UAEFI

Size: A4	Date: 2026-07-14	**Rev: F3**
KiCad E.D.A. 10.0.7		Id: 10/9