STREAMLINE® FLUSHWALL-TG

CONCEALED FASTENER, LAP SEAM METAL PANEL

OVERVIEW:

LITSCO's Flush TG panel is an ideal solution for exterior walls, parapets or soffits. The interlocking Tongue-n-Groove installation is fast and hides the fasteners making the 11" wide profile a clean, consistent appearance.

▶ MATERIALS: *Actual colors may vary from this representation*

KYNAR PAINTED ALUMINUM (AL) .040" & .050" **OR GALVANIZED (GL)** 24 GA & 22 GA

2 Coat Kynar Finish is Standard. A full list of all standard, premium colors, 3 coat, and custom colors is available upon request. Finish warranties of 20 years available.

Popular colors listed, Additional Colors may be available

ALMOND SR	SANDSTONE SR	MATTE BLACK
032/040/050 ALUMINUM 24 GA GALVANIZED	032/040/050 ALUMINUM 24 GA GALVANIZED	032/040/050 ALUMINUM 24 GA GALVANIZED

BONE WHITE SR	SILVER METALLIC	SLATE GRAY
032/040/050 ALUMINUM 24 GA GALVANIZED	040 ALUMINUM 24 GA GALVANIZED	032/040/050 ALUMINUM 24 GA GALVANIZED

COPPER (CP)
20 OZ

RED ROLLED	FREEDOM GRAY	AURUBIS NORDIC PATINA

STAINLESS STEEL (SS)
24 GA

RHEINZINK-PATINA ZINC (ZN)
0.8 MM & 1.0 MM

	BLUE-GRAY	GRAPHITE-GRAY

▶ TYPICAL STANDARD PANEL SIZE GUIDE:

KEY	STANDARD FLAT	V-REVEAL
AL, GL, CP, SS	11-1/4"	11"
ZN (0.8mm)	8-1/4"	8"
ZN (1.0mm)	14-7/8"	14-5/8"

▶ FEATURES:

8ft & 10ft lengths with the Baked Enamel Dark Bronze paint for immediate pickup or delivery. Custom lengths can be cut to order.

▶ INSTALLATION:

TRIM:

All flashing and trim will be fabricated by LITSCO or a qualified fabricator. Flashing shall be .032"-.040" aluminum or 24 GA steel.
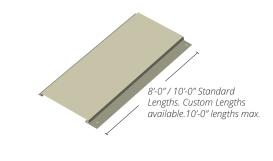
SUBGIRTS:

Streamline Flush TG panels are intended to be installed directly onto 18 GA (1/2") deep galvanized steel subgirts. Maximum spacing is 30" O.C.
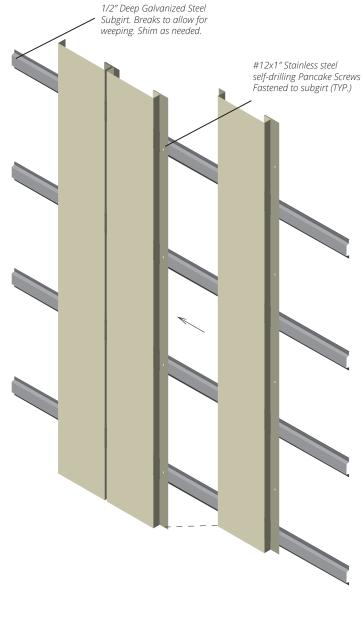
FASTENERS:

#12 pancake Phillips head, self-drilling stainless steel fastener. Fasteners to be installed 12" O.C.

Always follow manufacturer's guidelines for proper storage and handling prior to install.

1/2" Deep Galvanized Steel Subgirt. Breaks to allow for weeping. Shim as needed.

#12x1" Stainless steel self-drilling Pancake Screws Fastened to subgirt (TYP.)

8'-0" / 10'-0" Standard Lengths. Custom Lengths available.10'-0" lengths max.

STANDARD FLAT — SEE PANEL SIZE GUIDE —

V-REVEAL — SEE PANEL SIZE GUIDE —

LITSCO
LONG ISLAND TINSMITH SUPPLY CORP.
EST. 1918