Ex:10 Internetworking with routers in Cisco Packet Tracer
20/8/2026 Simulation

Aim:

To design and configure a simple Internetwork using a router with two routers, DHCP Server and Internet in cisc packet Traser.

Procedure:

1. Interworking using a router
2. Open Cisco packet Traser and add one router (Router1) pcs (pc0, pc1)
3. Connect both pcs to the router using Copper straight through cables.
4. Configure the router using cl 1.
5. Configure IP
6. Set the wireless networking SSID to homenetwork and enable DHCP
7. Connect the laptop to homenetwork & Configure PC using DHCP
8. Enable DHCP DNS Services on the Server.


Result:

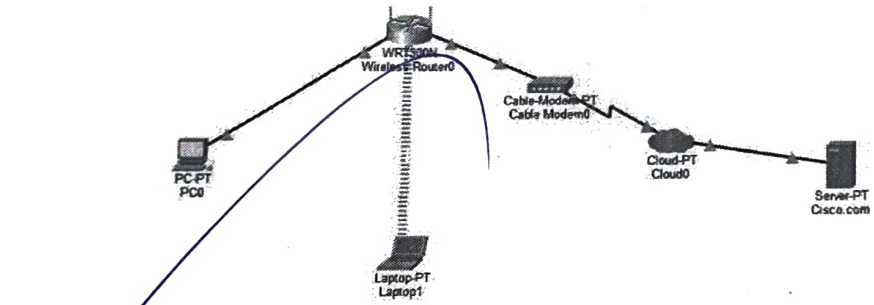
The Internetwork was Successfully designed Configure in Cisco Packet Teaser, router Communication, Wireless connectivity DHCP were verified Successfully

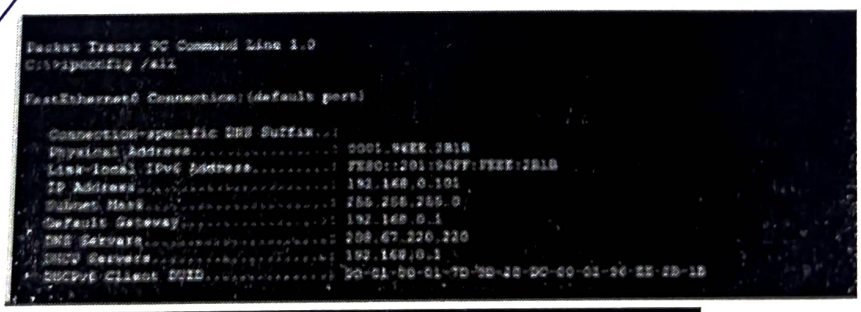


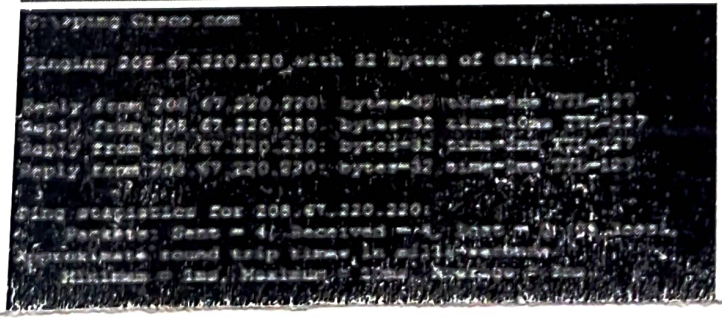



1941
Router0
PC-PT
PC0
PC-PT
PC1


1941
Router0
PC-PT
PC0
PC-PT
PC1


WRT300N
Wireless-N Router0
Cable-Modem PT
Cable Modem0
Cloud-PT
Cloud0
Server-PT
Cisco.com
PC-PT
PC0
Laptop-PT
Laptop1


Packet Tracer PC Command Line 1.0
C:\>ipconfig /all
FastEthernet0 Connection:(default port)
Connection-specific DNS Suffix..:
Physical Address.....: 0001.96EE.2B1B
Link-local IPv6 Address.....: FE80::201:96FF:FEEE:2B1B
IP Address.....: 192.168.0.101
Subnet Mask.....: 255.255.255.0
Default Gateway.....: 192.168.0.1
DNS Servers.....: 208.67.220.220
DHCP Servers.....: 192.168.0.1
DHCPv6 Client DUID.....: 00-01-00-01-7D-2B-42-DC-00-01-96-EE-2B-1B


C:\>ping Cisco.com
Pinging 208.67.220.220 with 32 bytes of data:
Reply from 208.67.220.220: bytes=32 time=1ms TTL=127
Reply from 208.67.220.220: bytes=32 time=10ms TTL=127
Reply from 208.67.220.220: bytes=32 time=1ms TTL=127
Reply from 208.67.220.220: bytes=32 time=1ms TTL=127
Ping statistics for 208.67.220.220:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 10ms, Average = 3ms