



Fakultät Informatik

From CAD Software to Slicer

Workflow Optimization using Print Hints in 3MF Files for 3D Printing

Bachelorarbeit im Studiengang Medieninformatik

vorgelegt von

Luise Hartdegen

Matrikelnummer 364 2168

Erstgutachter: Prof. Dr. Ulrich von Zadow

Zweitgutachter: Prof. Dr. Timo Götzelmann

© 2025

Dieses Werk einschließlich seiner Teile ist **urheberrechtlich geschützt**. Jede Verwertung außerhalb der engen Grenzen des Urheberrechtsgesetzes ist ohne Zustimmung des Autors unzulässig und strafbar. Das gilt insbesondere für Vervielfältigungen, Übersetzungen, Mikroverfilmungen sowie die Einspeicherung und Verarbeitung in elektronischen Systemen.

Abstract

//TODO shorter motivation, more focus on realized solution; keep it general → don't mention 3MF, OrcaSlicer, Fusion

With the rising popularity and easier access to 3D printers, more and more people are interested in designing and printing their own models. There are however still a few steps involved that require domain specific knowledge, oftentimes creating a discrepancy between the wanted outcome and reality. Preparing a 3D model for printing requires the user to apply material presets and printing parameters after importing the model to a slicer software. Doing this once is a logical and necessary step, but when creating a 3D model from scratch or changing one, it might take several iterations until the result matches the desired outcome. Thus the user has to repeatedly apply the aforementioned settings and therefore they have to remember them or write them down which creates friction in the workflow. Not only does this increase cognitive workload, leading to a higher frequency of errors and thus produces waste, it also often leads to frustration in beginner or casual makers. The solution presented in this paper are so-called print hints added in the 3D modeling software itself, in the proof of concept realized using Fusion appearances. Upon opening a 3MF file in OrcaSlicer, the appearances are mapped to either material presets or modifiers. By giving the user the option to map manually while also saving and loading previous mappings, the solution provides an automation of the criticized workflow while keeping the freedom to easily change an entire group of objects in one simple step.

Kurzdarstellung

//TODO translation

Contents

1. Introduction	1
2. Background and Related Work	5
2.1. State-of-the-art Workflow	5
2.2. 3D Modeling Software	6
2.3. Slicer	7
2.4. File Formats used in 3D Printing Context	7
2.4.1. STL	7
2.4.2. OBJ	8
2.4.3. AMF and 3MF	8
2.5. Workflow using Autodesk Fusion and OrcaSlicer	10
2.5.1. <i>Autodesk Fusion</i>	10
2.5.2. OrcaSlicer	10
2.5.3. Exporting as STL	11
2.5.4. Exporting as OBJ	11
2.5.5. Exporting as 3MF	11
2.5.6. Applying Materials	12
2.5.7. Applying Settings with and without Presets	13
2.6. Related Work and Available Solutions	13
3. Method	14
3.1. Writing print hints to 3MF file in Fusion	15
3.2. Analysis of OrcaSlicer's 3MF File Processing	15
3.3. Implementation Design	16
4. Results	17
4.1. Outlook	17
5. Conclusion	18
A. Supplemental Information	19
List of Figures	21
List of Tables	22

List of Listings	23
Bibliography	24

Chapter 1.

Introduction

It is one of the clearest paradoxes of modern work that computer-based systems designed to reduce task complexity and cognitive workload actually often impose even greater demands and stresses on the very individuals they are supposed to be helping.[1, p. 222]

Recent years have seen a rising popularity of digital fabrication within the hobbyist or so-called maker community, as well as in educational and professional settings. This growth can be attributed to the increasing availability of devices such as 3D printers, CNC milling machines and laser cutters in public spaces, along with the declining cost of these devices for end-users.

The applications of this technology are diverse, ranging from toys to household items, from replacements components to artistic creations, from educational models to prototypes for mass manufacturing, and ultimately to finished products in the emerging market of customised mass production, exemplified by websites such as *Thingiverse.com*, where users can upload their 3D models.

Initially, when the technology became widely available, the user base consisted primarily of individuals who were not only interested in the final result, but also demonstrated a keen interest in the technology itself and the process of creating models and setting up the printer. It is from this community that the so-called *makerspaces* emerged. These are spaces that provide affordable access to digital fabrication tools and act as knowledge hubs, often with financial support from their users.

Since then, there has been a considerable enhancement in the usability and automation of 3D printers, thereby rendering the technology more accessible to casual users. As was the case with programming in previous decades, 3D printing has found its way into education to teach various skills, including design, engineering and project management. “An additional benefit of digital fabrication is that it accelerates the processes of ideation and invention. It eliminates manual dexterity as the ‘middleman’ in transforming an idea into a product, so students can focus their attention on improving the design rather than

taking care of mundane issues with the materials – and many more cycles of redesign are possible in the same time interval.”[FabLab of Machines Maker]

Nowadays 3D printers are oftentimes available in schools and libraries as well, where the staff might not be as knowledgeable or well trained as in makerspaces. This leads to a more diversified user base in terms of knowledge, intent to learn and focus on technology versus a means to an end, i.e. the final result.

Despite these differences, the workflow from idea to finished product generally consists of the same steps across the board. Using a simple box with a snap-fit closure and multiple filament colors as an example, the workflow would be as follows.[2]

1. 3D Model: After coming up with an idea, the user either creates the 3D model from scratch or downloads one from the various databases available online and optionally modifies it.
2. Print Setup: They have to choose the printing material for the different parts, e.g. printing the box itself in white PLA and the text in a different color PLA, and set at the very least the temperature according to the materials specifications. Oftentimes further parameters or presets are needed to determine factors like supports¹, infill, speed and heating bed temperature. In this case, the green boxes around the closure would have to be marked as modifiers to increase the wall loops in the main model for added stability. The box is designed to be printed as two separate bodies, one for the top and the bottom each, which means the top has to be accordingly placed on the printing bed.
3. Slicing: The model then has to be translated into layer-by-layer instructions for the printer.
4. Printing: After inserting the chosen materials into the printer and optionally calibrating, the model can be printed.
5. Evaluation: Especially for newcomers and casual makers, the print might not turn out perfect on the first try. Therefore the print has to be evaluated for design flaws or printing errors. This often leads to revisions in the model itself or the print setup, starting a new iteration of the workflow.

Due to the highly specific use cases and quite different requirements, a “standard 3D printing workflow [...] requires disparate pieces of software, which then leave behind only a fragmented record of the fabrication process. CAD models are stored and

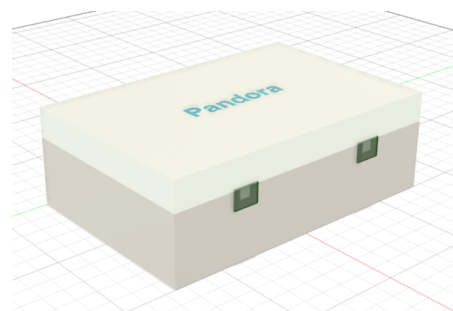


Figure 1.1.: 3D model as example

¹//TODO definition

shared as static geometry files. Separately, operators can tweak relevant settings in CAM software called a slicer, which can then be saved as a slicing profile.”[its not the shape]

With a wider and more diverse user base, discussions about how to streamline the process, lower hurdles and simplify the sometimes rather complex steps involved have increased in the scientific HCI² community.[2] Even though the technology itself improved in regards to usability and maintainability, the skills required to operate a 3D printer remain high. [PrintAssist]

Various different approaches have been documented to tackle this problem, ranging from easier 3D modeling software, improved process documentation[its not the shape] or even chatbots as human-machine interfaces. [PrintAssist] “[C]urrent tools that focus on supporting only one aspect of the workflow (*e. g.* , only modelling or only printing) may be less useful for casual makers and there is opportunity in HCI research to innovate on design tools that take into account the interdependencies within the 3D printing workflow”[2] //TODO check if still up-to-date / relevant

One such aspect concerns printing parameters and particularly the need for documentation either to be able to recreate the conditions or to get support with previous configurations in case something went wrong. To have consistent results when comparing different iterations of one’s print, printing parameters shouldn’t changed unless specifically identified as a problem. This does however raise the need for users to either remember their settings or document them in some way, oftentimes outside of the software used. Partly slicer software provides an option to save settings in the form of user presets but as soon as the project becomes more complex, the user still has to remember or document which presets they used for which parts. [3D Printers as Sociable Technologies]

Focusing on the connection between parts of the model and applied settings, the solution presented in this paper analyses the feasibility of the use of ‘print hints’ early on in the process to improve the interdependency of modeling and slicer software and the overall user experience. Print hints are markers, added to the model during the 3D modeling phase that the slicer can process semi-automatically. The idea is to offer the user the option to map the markers to their own filament or modifier presets while simultaneously saving the resulting mapping upon importing the model to the slicer. Thus if the same maker is reused in a new iteration or even a new model, the interface can apply the mapped preset while still giving the user the option to change it.

²human-computer interaction

The goal is to streamline the iterative design workflow by reducing the need to repeatedly configure the same printing parameters in each iteration, therefore lowering cognitive workload for users. The prototype presented in the following thesis focuses mainly on improving the workflow using already available options while simultaneously introducing a new user interface and consequently changed handling when opening the 3d model in the slicer.

Chapter 2.

Background and Related Work

some clever bridge from problem to technical and related background

to understand...

research indicates...

beginning the inquiry...

2.1. State-of-the-art Workflow

using the model from chap 1 as an example

from 3d modeling to evaluation → general, no specific software or file formats

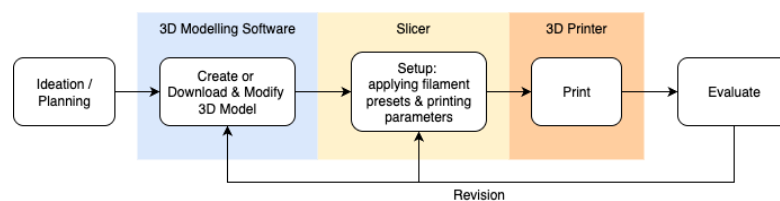


Figure 2.1.: Iterative workflow in 3D printing highlighting the step to be optimized

When analyzing the process from idea to final result, several main steps can be identified as shown in 2.1. “[Y]ou need to create or acquire a 3D computer-aided design (CAD) model, slice this model into layers and generate the commands needed to physically create the model, and, finally, physically create the print.”[4, p. 52]

two parts requiring highly specific knowledge: 3d modeling and setting the model up to print

as previously mentioned, repetitive manual steps are necessary during the slicer setup when considering the following three aspects

1. Using multiple materials (e.g. printing the text in a different color)

2. Using model parts as modifiers (e.g. the translucent green boxes as modifiers to print more wall loops in the closure's area for higher stability)
3. A model consisting of multiple parts, some of which are not positioned on the surface they need to be printed on (e.g. the lid)

2.2. 3D Modeling Software

when realizing an idea from scratch, rather than downloading an available model online and modifying it, the user would create their own model using 3D modeling software

this software is used to transform an idea or a 2d sketch into a 3D solid or surface representation, meaning that it describes the external geometry fully [additive manufacturing technology]

difference between modeling for digital target (only surface) vs. physical / manufacturing targeted (volumes, closure of surface)

→ let's focus on manufacturing targeted 3D modeling

while they often provide functionalities for several different processes, computer-aided design (CAD) is the most relevant at hand

modeling software targeted for digital products, like animation, focuses on positioning and forming models or parts thereof by sight

modeling software for manufacturing purposes on the other hand is built on precise measurements, often starting from one or more 2d sketches and then extruding and cutting parts based off of these sketches

the final result can be described either by a consecutive order of instructions or by a polygonal structure //TODO fact check

what is it

how does it represent 3D models

2.3. Slicer

“The key to how AM¹ works is that parts are made by adding material in layers; each layer is a thin cross-section of the part derived from the original CAD data.”[Additive Manufacturing Technologies]

what is it

how does it represent 3D models

Slicer software on the other hand imports a 3D model and “slices [it] into layers for the printer [...] allow[ing] users to select print settings, such as layer height and print speed”[2] It therefore translates the model into step-by-step commands for a specific printer. There are many different slicers available online nowadays, either general ones or ones specific to printer manufacturers. Since “getting all the settings right for a particular 3D printer can be fiddly, a lot of manufacturers modify one of these open source programs and create a proprietary program just for their machine.”[4, p. 58]

and how most slicers available today are somewhat related

2.4. File Formats used in 3D Printing Context

explanation of file formats in approximately the same depth each

2.4.1. STL

“STL native files describe only the surface geometry of a three dimensional object without any representation of color, texture or other common CAD model attributes,”[6] meaning that even if a user applies materials during the modeling stage, that information won’t be exported, and the user has to apply all materials anew before slicing.

Furthermore there will always be one body in the resulting file, even if the model is comprised of multiple bodies within Fusion. Therefore the user has to choose whether to combine all bodies into one or exporting each body as a separate file.

Alternatively exporting each body as a separate file might loose their spatial relations to each other while keeping the bodies separate.

¹Additive Manufacturing

2.4.2. OBJ

The OBJ file format is considered to be the preferred 3D printer file format for multicolor printing.[6]

Just like STL files though, the model is generated as one body per file

2.4.3. AMF and 3MF

a note on AMF vs 3MF?

NO REFERENCING FUSION OR ORCASLICER HERE

Unlike the other two formats, 3MF not only preserves separate bodies even when exported as a single file making it more user-friendly, it also includes “information about the model’s color, material, and textures.”[6]

While each of the three file formats mentioned have their own advantages and disadvantages, preliminary analysis indicated that the 3MF format represents the most suitable solution for the problem at hand. 3MF has been developed by the 3MF Consortium, founded by Microsoft, Autodesk, HP, 3D Systems, Prusa Research and several other key players in the field, to create a 3D printing file format that addresses the shortcomings of previous standards (STL, OBJ, AMF). In particular the possibility for extensions and the support of colors as well as several different 3D model representations were a main factor, making it ideal for background additive manufacturing.[7]

“A 3MF file is a ZIP archive that contains a complex file structure, defining a 3D model in Extensible Markup Language (XML) file”[7] usually called `3dmodel.model`, as seen in 2.2. Optionally, there can be multiple 3D model files, one of which needs to be identified in the StartPart relationship as the root model. The 3D model part is comprised of two sections per specification: “a set of resource definitions that include objects and materials, as well as a set of specific items to actually build”.[8]

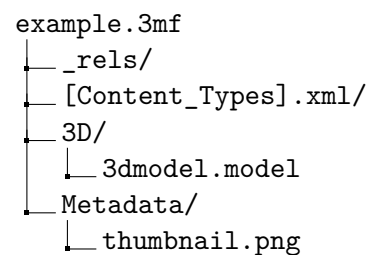


Figure 2.2.: Example structure of 3MF file

Taking a closer look at the composition of said XML file as it is exported from Fusion, see A.1, these sections can be found in lines 4 ff. (the `resources` tag), enclosing the `m:colorgroup` and `object` tags, and lines 41 ff. containing the `build` tag. While materials can be represented in a number of different resource tags (e.g. `basematerials`, `m:texture2d`, `m:compositematerials...`), Fusion seems to solely use the `m:colorgroup` tag. Unfortunately there aren’t a lot of information available as to the exact way Fusion

exports 3MF, hence the following paragraph is partly based on explorative observations.

The `colorgroup` contains two or more colors as an RGBA hexadecimal color code each, as mentioned before. Per the additional Materials and Properties Extension specification[9], colors are specifically expressed in sRGB colorspace in accordance with the World Wide Web Consortium. Each group is identifiable by its `id` which is referenced in each object as `pid` while the colors themselves implicitly get a 0-based index. Despite the colors' representation as an RGBA hexadecimal color code, thus including an 8-bit channel for opacity, the standard specifies that color properties *should not* reference translucent display properties. If required, a multi-properties group must be used instead. Empirical observations indicate compliance with this requirement, as the opacity value is consistently set to FF, i. e. a fully opaque color.

Since it is possible in Fusion to apply appearances and physical materials independently of one another, one might think one color represents the appearance and the other the physical material. Observations, however, do not support this theory since even when changing both, only the first color within one `colorgroup` changes while the second one stays a light grey (“#A0A0A0FF”).

The following `object` tags each contain attributes (body id, type, color id) as well as one triangular geometry mesh representation of an object volume. The latter is represented by vertices (x-, y-, z-coordinates in the unit specified within the model's attributes) and triangles referencing three vertices each oriented with normals pointing towards the exterior of their object.[8] Meshes of different objects may intersect (as seen in the above mentioned example's case of wall loop modifiers) or self-intersect, in which case it must be specified which areas are inside or respectively outside the volume.

A so-called PrintTicket can be attached to each 3D model part detailing user intent and device configuration information for printers. This might be useful for the intended purpose of print hints but has not been further pursued as an idea due to the way, the file is being handled in *OrcaSlicer*.

In regards to adding print hints directly to the model's xml structure, it shall be noted that in accordance with the specification “XML content MUST NOT contain elements or attributes drawn from the "xml" or "xsi" namespaces unless they are explicitly defined in the XSD schema or by other means in the specification.”[8]

2.5. Workflow using Autodesk Fusion and OrcaSlicer

the following analysis will focus on the steps from exporting a model to printing using two specific softwares as example, highlighting in particular how the workflow differs depending on the file format used in regards to three points.

2.5.1. Autodesk Fusion

The first software, Autodesk Fusion, is used for designing, engineering, simulating electronics and as basis for manufacturing[3]

It provides functionalities for the entire product development process with support for various different techniques[3], meaning it can be used for designing parts to manufacture in either additive or subtractive processes

It also provides visualization tools for examining and analyzing designs, as well as simulation capabilities, for example, to assess how different components interact or respond to various mechanical stresses.

2.5.2. OrcaSlicer

OrcaSlicer is one the open source slicers, originally forked from *Bambu Studio*, which itself was forked from *PrusaSlicer*, a descendant of *Slic3r*. “Slic3r is licensed under the GNU Affero General Public License, version 3”[5], which means that every software using parts of it has to be licensed under the same license. Since these slicers are all intricately linked, oftentimes new features are being introduced in one of them and then pulled over into the others as well.

Exporting the model from Fusion is possible via two dialogs: the general export and the 3D print specific one. The two dialogs each offer a different set of file formats due to their different purposes. Since this analysis deals with 3D printing in particular, only the export dialog specific to 3D printing will be considered, which offers to export as STL, 3MF and OBJ format. For all three the user can decide whether to generate one file containing all selected components and bodies, or one file per body.

2.5.3. Exporting as STL

when combining all bodies into one STL file → one extra step to split the model into separate objects within OrcaSlicer to be able to print the text in a different color or to use the green boxes as modifiers

when importing multiple files at once → OrcaSlicer has the user confirm whether the files should be loaded as a single object with multiple parts

The advantage over loading each file as an object is the preservation of the spatial relation and thus parts, like the modifiers in the example box, can be placed at any height while a single object is always placed with at least one surface flush with the printing plate.

2.5.4. Exporting as OBJ

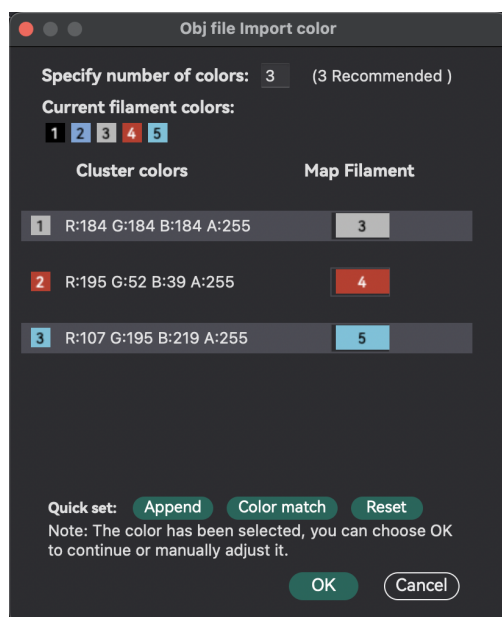


Figure 2.3.: OBJ color mapping dialog in OrcaSlicer

cite software? & check formatting for dialog

Consequently, OrcaSlicer shows a particular dialog (fig. 2.5.4) when opening an OBJ file, asking the user how they want to map the file's colors to current or new filament presets. This makes it easy for users to align filament colors (i.e. the color the filament is represented as in OrcaSlicer, not necessarily the color of the filament itself) to colors applied in Fusion. one body per file → in the same dialogs and extra steps.

2.5.5. Exporting as 3MF

Unlike the other two formats, 3MF not only preserves separate bodies even when exported as a single file making it more user-friendly, it also includes “information about the model's color, material, and textures.”[6] Initially when importing a 3mf file containing multiple objects, OrcaSlicer asks the user whether the file should be loaded as a single object with multiple parts instead of considering them as multiple objects similar to the dialog when importing multiple STL or OBJ files at once.

While Fusion does export materials as RGBA colors in one hexadecimal color code per body, OrcaSlicer does not offer the user to map these to available or new presets so far. Consequently users have to reapply materials manually which has been criticized by users, e.g. in *OrcaSlicer issue #2438*².

OrcaSlicer always handles files as projects, either by interpreting 3MF files as a project in itself or by opening a file within a new project. That way the user has the option to save project specific settings or presets for further use or just export the generated g-code for printing and discard said settings.

fuse next two subsections → clear difference between *filament*, *settings*, *parameters* etc if using em

2.5.6. Applying Materials

“For extrusion-based 3D printing, material properties such as rheology³ or melting temperature are as relevant as machine configurations such as print speed, nozzle geometry, and heating profiles.” [It’s Not the Shape, It’s the Settings]

Generally, materials can be set using system or user defined presets per object. Material settings entail, amongst others, the filament itself, nozzle temperature, general printing speed and cooling settings. OrcaSlicer actively asks the user, whether they want to save any changes to material parameters they have made, which makes it easy to save either parameters specific to one’s printer and filament or even specific to one project while simultaneously keeping default material presets untouched. When importing a new file or project, OrcaSlicer does apply the first available user preset filament by default. More detailed analysis even showed, that a multicolor file will be imported with different filaments assigned consecutively but the user doesn’t have any options to map colors to filaments the way it works with OBJ files. Furthermore, the last color per colorgroup (more details in the following chapter ??) is assigned to each object which is why even complex models with different colors appear as having one single material in OrcaSlicer.

²Single Object Multiple parts with Multiple Colours: [...] I have made a number of 3D models with multiple parts in single 3mf file. I mostly use Fusion 360 for models and during modeling I assign colours to each part. But when I upload this 3mf file to the slicer, It assigns the primary filament colour to all the parts. I was wondering if the slicer would be able to distinguish the parts with different colours and assign either the original colour to the parts or even random colours(which can be changed later). For example if my 3mf file has 5 colour parts, the slicer should be to detect them. Then it should find which colour has the maximum spread by area and assign the filament 1 to it. The second largest should be assigned the second filament and so on till the last.[...] <https://github.com/SoftFever/OrcaSlicer/discussions/2438>

³[//TODO](#) explain

2.5.7. Applying Settings with and without Presets

Settings like the amount of wall loops, infill percentage and pattern, and printing speed for single layers might need to be customized. It is possible to save these as presets as well, however only globally, i.e. they can only be applied to the entire project, not to specific objects within. As criticized in the *OrcaSlicer Issue #7769*⁴, particularly for projects containing multiple objects, using presets in this case is not a valid option.

2.6. Related Work and Available Solutions

“CAM-based design tools have emerged where toolpaths are specified directly. This approach is contrasted with CAD-based tools which are based on geometric models [23]. CAM-based tools naturally shift focus to the machine and its settings. Prior work generates custom toolpaths using traditional CAD environments [20 , 21], code [25 , 54 , 62], hand-drawn sketches [23], and domain-specific abstractions [5].”[its not the shape]

how do others solve the issue → focus on documentation [its not the shape]

⁴Copy/paste per-object settings: When planning/building large projects in-slicer it often becomes an extremely tedious task to click all the objects you want a specific set of settings to apply to. The larger the assembly/project you are planning, the easier it is to miss a body and make a mistake. If you "assemble" models together you cannot edit multiple sub-objects across assemblies.
<https://github.com/SoftFever/OrcaSlicer/issues/7769>

Chapter 3.

Method

general explanation of how I solved this

how does the workflow change → exemplary 3d model from before

why 3mf

implementation

- what changed
- what does the file format look like now → how is the process of opening 3mf files in the slicer different now than before
- new user interface
- what additional information is being transmitted / read in

The task of setting printing parameters is by nature a complex one, due to the many different printers, materials and project-specific needs out there. To recap briefly, the intention is not to reduce that complexity in and of itself, but to reduce the need to remember and repeatedly apply those settings. Accordingly from the very start, the idea was to mark bodies with so-called ‘print hints’ in a 3D model in a way that enables the slicer to apply the user’s parameters automatically when importing a new model.

option 1: writing directly to the 3mf model_settings.config → complex

option 2: using Fusion’s native options to apply appearances and mapping those to filaments, printing parameters and modifier types using a custom mapping file and a dialog similar to the filament mapping when importing an .obj file

3.1. Writing print hints to 3MF file in Fusion


as a proof of concept → using Fusion’s native appearances (as opposed to physical materials) to mark differentiate bodies with diverging settings

these are already being saved and the big advantage is that users can create a personal library of appearances for all there models to reuse the appearance-to-parameter mapping

3.2. Analysis of OrcaSlicer’s 3MF File Processing

While chapter ?? put a focus on the state-of-the-art workflow from the user’s perspective, coming up with a way to solve the problem required a deeper analysis of the way OrcaSlicer handles 3mf files since this provided some clues as well as limitations regarding possible approaches.

- it does read in all the xml lines from the *3dmodel.model* file including the materials but it doesn’t write them to the model
- the colors are being read in but due to the way Fusion saves colors in 3mf files (as explained previously), OrcaSlicer iterates over all colors per colorgroup and overwrites the ‘correct’ (first) color with the default grey which is usually the last color per colorgroup
- this was the easier part and first step to fix
- it does however map the colors automatically to extruders and assigns the user’s saved filaments consecutively

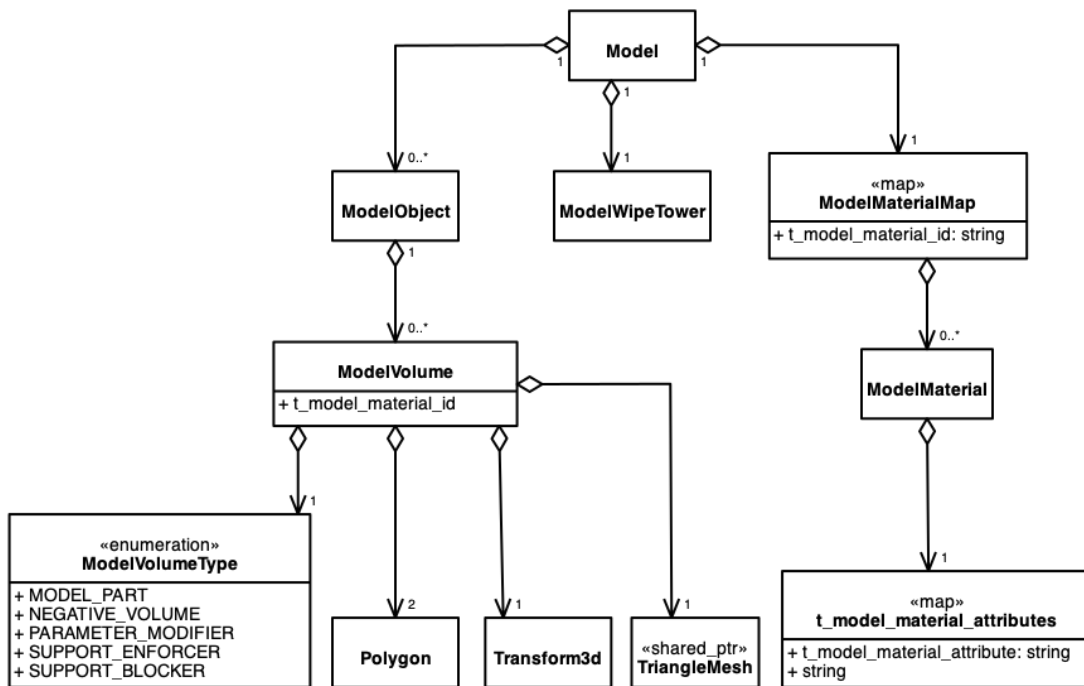

3.3. Implementation Design

different possible approaches to solve the problem at hand and why did I do it the chosen way?

As mentioned before, as a proof of concept using specific materials to represent the possible modifiers was the way to go. The idea was to save user presets locally containing a map of “materials”, i.e. the RGBA hexadecimal color codes, to chosen modifier presets or actual filaments respectively. When opening a new 3MF project, the user would be prompted to either confirm the material to modifier / filament mappings or select options for newly detected materials. This reduces the need to apply settings upon each import while simultaneously giving the user the option to easily change mappings.

- software architecture (diagram?)
- input, output
- choices that had to be made

Chapter 4.

Results

- what does the optimized workflow look like? → example
- why is the solution good? → expert interviews
 - how are the results analysed / validated?
 - openly available → advantages of that
 - but: it is a proof of concept / prototype and thus will most likely not be the end of the story

4.1. Outlook

- communication with OrcaSlicer's owner softfever?
- option of code being pulled into other slicers
- what is left to do?

Chapter 5.

Conclusion

introduction backwards with a focus on results

Appendix A.

Supplemental Information

```
1 <?xml version="1.0" encoding="utf-8"?>
2 <model xmlns="http://schemas.microsoft.com/3dmanufacturing/core
  /2015/02" unit="millimeter" xml:lang="en-US" ...>
3   <metadata name="Title" type="QName" preserve="1">Pandoras
    Box</metadata>
4   <resources>
5     <m:colorgroup id="2">
6       <m:color color="#B4B3B3FF"/>
7       <m:color color="#A0A0A0FF"/>
8     </m:colorgroup>
9     <m:colorgroup id="4">
10      <m:color color="#449648FF"/>
11      <m:color color="#A0A0A0FF"/>
12    </m:colorgroup>
13    ...
14    <object id="1" name="Body1" type="model" p:UUID="88b92134
      -b51b-4129-a501-3cb7a6b35a19" pid="2" pindex="0">
15      <mesh>
16        <vertices>
17          <vertex x="99.000000" y="-34.800000" z="
            32.500000" />
18          <vertex x="99.000000" y="-34.800000" z="
            35.000000" />
19          ...
20        </vertices>
21        <triangles>
22          <triangle v1="0" v2="1" v3="3" />
23          <triangle v1="3" v2="1" v3="2" />
24          ...
25        </triangles>
```

```

26         </mesh>
27     </object>
28     <object id="3" name="Body10" type="model" p:UUID="83
        b1ffc1-fe3a-41ff-b2d8-709e401b58c0" pid="4" pindex="0"
        >
29         <mesh>
30             <vertices>
31                 <vertex x="97.000000" y="44.000000" z="26.000000
                    " />
32                 ...
33             </vertices>
34             <triangles>
35                 <triangle v1="0" v2="1" v3="3" />
36                 ...
37             </triangles>
38         </mesh>
39     </object>
40 </resources>
41 <build p:UUID="9062348e-a030-4f92-86b2-786a03cd804d">
42     <item objectid="1" p:UUID="df0ef4a8-b05c-41c3-a041-
        f6ca9d41a68c" />
43     <item objectid="3" p:UUID="2dd63bd5-069d-405e-9b05-0
        fd5f5a71f72" />
44     ...
45 </build>
46 </model>

```

Listing A.1: Abbreviated Example of 3MF's 3dmodel.model File

List of Figures

1.1. 3D model as example	2
2.1. Iterative workflow in 3D printing highlighting the step to be optimized	5
2.2. Example structure of 3MF file	8
2.3. OBJ color mapping dialog in OrcaSlicer	11

List of Tables

List of Listings

A.1. Abbreviated Example of 3MF's 3dmodel.model File	19
--	----

Bibliography

- [1] J. A. Jacko, *Human Computer Interaction Handbook: Fundamentals, Evolving Technologies, and Emerging Applications, Third Edition*. Milton, UNITED KINGDOM: Taylor & Francis Group, 2012. [Online]. Available: <http://ebookcentral.proquest.com/lib/thnuernberg/detail.action?docID=911990>
- [2] N. Hudson, C. Alcock, and P. K. Chilana, “Understanding Newcomers to 3D Printing: Motivations, Workflows, and Barriers of Casual Makers,” in *Proceedings of the 2016 CHI Conference on Human Factors in Computing Systems*, ser. CHI ’16. New York, NY, USA: Association for Computing Machinery, 2016, pp. 384–396. [Online]. Available: <https://dl.acm.org/doi/10.1145/2858036.2858266>
- [3] Autodesk Inc., “Autodesk Fusion | 3D CAD, CAM, CAE, & PCB Cloud-Based Software | Autodesk.” [Online]. Available: <https://www.autodesk.com/products/fusion-360/overview>
- [4] J. Horvath and R. Cameron, *Mastering 3D Printing in the classroom, library, and lab*. New York: Apress, 2018.
- [5] SoftFever, RF47, ianalexis, and Arcodude, “OrcaSlicer/doc.” [Online]. Available: <https://github.com/SoftFever/OrcaSlicer/tree/main/doc>
- [6] C. Iancu, “ABOUT 3D PRINTING FILE FORMATS,” *Annals of the „Constantin Brancusi” University of Targu Jiu*, no. 2, pp. 135–138, 2018.
- [7] J. Rossel, V. Mladenov, and J. Somorovsky, “Security Analysis of the 3MF Data Format,” in *Proceedings of the 26th International Symposium on Research in Attacks, Intrusions and Defenses*. Hong Kong China: ACM, Oct. 2023, pp. 179–194. [Online]. Available: <https://dl.acm.org/doi/10.1145/3607199.3607216>
- [8] 3MF Consortium, “3MF Core Specification & Reference Guide,” International Organization for Standardization, Standard, Feb. 2025. [Online]. Available: <https://3mf.io/spec/core-v1-3-0/>
- [9] —, “Materials Extension,” International Organization for Standardization, Standard, Feb. 2025. [Online]. Available: <https://3mf.io/spec/materials-v1-2-1/>

- [10] T. Kosch, J. Karolus, J. Zagermann, H. Reiterer, A. Schmidt, and P. W. Woźniak, “A Survey on Measuring Cognitive Workload in Human-Computer Interaction,” *ACM Computing Surveys*, vol. 55, no. 13s, pp. 1–39, Dec. 2023. [Online]. Available: <https://dl.acm.org/doi/10.1145/3582272>