ECH15SC/20SC Technical Data
Low Lift Pallet Trucks

ECH15SC/Li-Ion

ECH20SC/Li-Ion



Li-Ion INSIDE

This specification sheet, which conforms to VDI guideline 2198, provides the technical values for the standard equipment only. Different tyres, other masts, the use of accessories, etc. may result in other values.



Features	**1.1**	**Manufacturer**		**STILL**	**STILL**
	1.2	Model designation		ECH15SC	ECH20SC
	1.3	Power unit		Electric	Electric
	1.4	Operation		Pedestian	Pedestian
	1.5	Load capacity	Q(kg)	1500	2000
	1.6	Load centre	c(mm)	600	600
	1.8	Axle centre to fork face	x(mm)	942[2)]	942[2)]
	1.9	Wheelbase	y(mm)	1125/1066[1/2)]	1125/1066[1/2)]
Weights	2.1	Service weight	kg	107[3)]	112[3)]
	2.2	Axle load with load, drive/load side	kg	534/1073[3)]	537/1075[3)]
	2.3	Axle load without load drive/load side	kg	80/27[3)]	83/29[3)]
Wheels	3.1	Tyre,operator/load side		Polyurethane	Polyurethane
	3.2	Tyre size, drive side	mm	200X60	200X60
	3.3	Tyre size, load side	mm	80X60	80X60
	3.5	Wheels number, drive/laod side (x=driven)		1X+/4	1X+/4
	3.7	Track width, load side	b11mm	410/535[1)]	410/535[1)]
Dimensions	4.4	Lift	h3(mm)	115	115
	4.9	Height of tiller arm in operation position min/max	h14(mm)	700/1190	700/1190
	4.15	Fork height, lowered (max)	h13(mm)	80	80
	4.19	Overall length.(platform folded/lowered)	l1(mm)	1450[5)]	1450[5)]
	4.20	Length to fork face.(platform folded/lowered)	l2(mm)	300[5)]	300[5)]
	4.21	Overall width	b1(mm)	560/685[1)]	560/685[1)]
	4.22	Fork dimensions	s/e/l(mm)	55/150/1150[1)]	55/150/1150[1)]
	4.25	Fork spread, min./max.	b5(mm)	560/685[1)]	560/685[1)]
	4.32	Ground clearance, center of wheelbase（Full Load）	m2(mm)	25[2)]	25[2)]
	4.33	Aisle width, 1000x1200mm pallet crosswise	Ast(mm)	2045[5)]	2045[5)]
	4.34	Aisle width, 800x1200mm pallet lengthwise	Ast(mm)	1918[5)]	1918[5)]
	4.35	Turning radius	Wa(mm)	1242[5)]	1242[5)]
Performances	5.1	Travel speed, with/without load	km/h	5.3[6)]	4.8[6)]
	5.2	Lift speed, with/without load	m/s	0.023/0.029	0.020/0.024
	5.3	Lower speed, with/without load	m/s	0.055/0.032	0.033/0.029
	5.8	Maximum climbing ability, with/without load	%	10/20	8/20
	5.9	Acceleration time, with/without load	s	3[6)]	3[6)]
Drive	6.1	Drive motor output (60 min.rating)	Kw	0.85	0.85
	6.2	Lift motor output (10% rating)	Kw	0.5	0.5
	6.4	Battery voltage/rated capacity(20h)	V/Ah	48V10Ah	48V15Ah
	6.5	Battery weight（±5%）	kg	5.3	6.9
	6.7	Service brake		Electromagnetic	Electromagnetic
Others	8.1	Type of Drive control		DC control	DC control
	8.4	Sound level at driver's ear	dB(A)	70	70


[1] For an overall fork width of 685 mm


[2]

Battery power and charging times

	Batteries					**Charging time**
	Capacity	Voltage	Technology	Weight	Operating time	Standard charger
ECH15SC/ ECH20SC	10/15 Ah	48 V	Li-Ion	5.3/6.9 kg	Up to 180 min	3-4 h

Technical Drawings

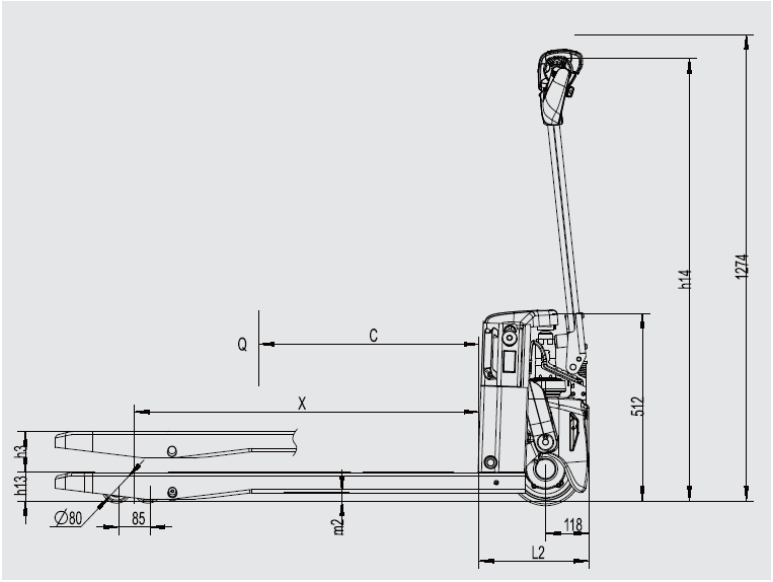

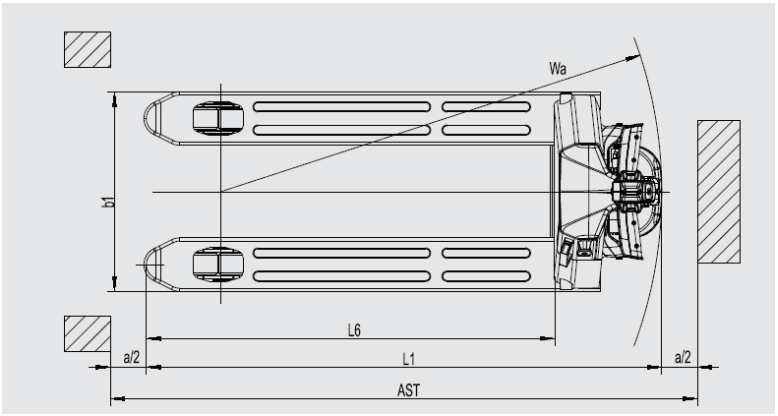

$$Ast = Wa + \sqrt{(l6 - x)^2 + (\frac{b12}{2})^2} + a$$

ECH15SC and ECH20SC Low Lift Pallet Trucks
Innovation in Motion

Smart alternative to hand pallet trucks: Compact truck dimensions, low service weight, maintenance-free lithium-ion battery

Ready for use at all times thanks to the lithium-ion battery, which can be quickly and easily charged or interim charged from a power socket via Plug & Play

Safe and efficient even in confined spaces: The creep speed switch enables safe manoeuvring even with the tiller in an upright position



ECH15SC/ECH20SC

The ECH15SC/ECH20SC is the ideal alternative to the hand pallet trucks. Its compact dimensions and low service weight of just 107/112 kilos make it the perfect partner for horizontal freight transport over short, level routes and in confined spaces. Whether in goods lifts, on sales floors or in racking aisles, the ECH15/20SC is light, agile and safe, and, thanks to the creep speed switch, extremely manoeuvrable even with the tiller in an upright position. All this ensures its high efficiency and flexibility even in areas with little space for manoeuvring. In addition, the lithium-ion battery provides maximum availability, as the battery can be charged and interim charged at any time at a power socket via the external charger. The ECH15/20SC also offers a high level of user convenience. Thanks to the electric drive and the ergonomic tiller, loads up to 1,500/2,000 kg can be moved without fatiguing the operator, while conserving power in the process.



Flexible use even in freight lifts or on mezzanine floors thanks to the low service weight



Unrivalled availability thanks to lithium-ion battery for fast interim charging



The low-level chassis and sturdy frame construction ensure particularly reliable and safe goods transport



Agile, safe and manoeuvrable even in confined spaces. Thanks to the compact size and integrated creep speed switch

ECH15/20SC Low Lift Pallet Trucks

The ‘Simply Efficient’ factors: Performance attributes as a measure of economic efficiency

Simply easy

- Easy and fatigue-free manoeuvring thanks to electric drive and lift motor
- Fatigue-free operation: Easy-grip tiller for left and right-handed operators
- Real-time information: The battery status is indicated by an LED light (green, yellow, red)

Simply powerful

- Impressive goods handling: Lifting capacity of 1,500 to 2,000 kg
- Always ready for use: Additional replacement battery maximizes availability
- Durable: Sturdy frame construction
- High performance: Powerful and low-maintenance drive motor

Simply safe

- Safe operation: Optimally dimensioned and positioned impact plate
- Improved operator health: No exhaust emissions thanks to maintenance-free battery technology

Simply flexible

- Suitable for almost any application thanks to compact dimensions
- Different fork dimensions available for different load carriers

Simply connected

- Seamless interaction: The li-ion batteries with battery management system interact with the truck

STILL GmbH
Berzeliusstr. 10
22113 Hamburg
Germany
Tel.: +49 40 73 39 20 00
Fax: +49 40 73 39 20 01
info@still.de

For further information please visit

www.still.eu

STILL is certified in the following areas: Quality management, occupational safety, environmental protection and energy management.



ECH EN 07/25 Subject to technical modifications.