ARO® Diaphragm Pumps

Non-metallic

Non-Metallic Models – Range and Performance

	EXPERT Series	EXPERT Series	EXPERT Series	EXPERT Series	PRO Series	EXPERT Series	PRO Series	EXPERT Series	PRO Series	EXPERT Series	EXPERT Series
	1/4″	3/8″	1/2″	3/4″	1″	1″	1 1/2″	1 1/2″	2″	2″	3″
1 min.	20 l/min (5.3gal)	40.1 l/min (10.6gal)	54.5 l/min (14.4gal)	56 l/min (14.8gal)	178 l/min (47gal)	200 l/min (53gal)	378 l/min (100gal)	465 l/min (123gal)	549 l/min (145gal)	696 l/min (184gal)	1022 l/min (270gal)
Max. bar	8.6 bar (125 psi)	6.9 bar (100 psi)	6.9 bar (100 psi)	6.9 bar (100 psi)	8.3 bar (120 psi)	8.3 bar (120 psi)	8.3 bar (120 psi)	8.3 bar (120 psi)	8.3 bar (120 psi)	8.3 bar (120 psi)	8.3 bar (120 psi)
	1/4″ NPT 1/4″ BSP	3/8″ NPT 3/8″ BSP	1/2″ NPT 1/2″ BSP	3/4″ NPT 3/4″ BSP	1″ NPT 1″ BSP 1″ ANSI/DIN	1″ NPT 1″ BSP 1″ ANSI/DIN	1 1/2″ ANSI/DIN	1 1/2″ ANSI/DIN	2″ ANSI/DIN	2″ ANSI/DIN	3″ ANSI/DIN
	1/4″ NPT 1/4″ BSP	3/8″ NPT 3/8″ BSP	1/2″ NPT 1/2″ BSP	3/4″ NPT 3/4″ BSP	1″ NPT 1″ BSP 1″ ANSI/DIN	1″ NPT 1″ BSP 1″ ANSI/DIN	1 1/2″ ANSI/DIN	1 1/2″ ANSI/DIN	2″ ANSI/DIN	2″ ANSI/DIN	3″ ANSI/DIN
Material	Polypropylene PVDF Groundable acetal	Polypropylene PVDF Groundable acetal	Polypropylene PVDF Groundable acetal	Polypropylene	Polypropylene PVDF	Polypropylene PVDF Conductive polypropylene	Polypropylene PVDF	Polypropylene PVDF Conductive polypropylene	Polypropylene PVDF	Polypropylene PVDF Conductive polypropylene	Polypropylene PVDF
Max.	1.6 mm (.06in)	1.6 mm (.06in)	2.4 mm (.09in)	2.4 mm (.09in)	3.2 mm (.12in)	3.2 mm (.12in)	6.4 mm (.25in)	6.4 mm (.25in)	6.4 mm (.25in)	6.4 mm (.25in)	9.5 mm (.375in)
ATEX certified	*With wetted parts in groundable acetal.*	*With wetted parts in groundable acetal.*	*With wetted parts in groundable acetal.*	–	–	*With conductive polypropylene motor*	–	*With conductive polypropylene motor*	–	*With conductive polypropylene motor*	–

Metallic

Metallic Models – Range and Performance

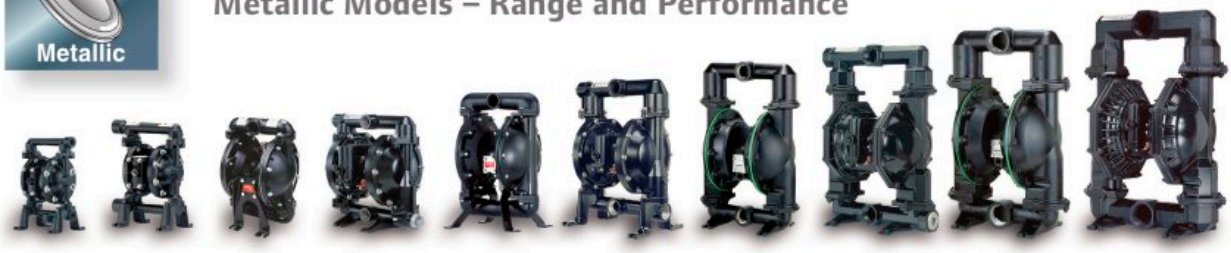

EXPERT Series	EXPERT Series	PRO Series	EXPERT Series	PRO Series	EXPERT Series	PRO Series	EXPERT Series	PRO Series	EXPERT Series
1/2″	3/4″	1″	1″	1 1/2″	1 1/2″	2″	2″	3″	3″
45.4 l/min (12gal)	**51.5 l/min** (13.6gal)	**133 l/min** (35gal)	**197 l/min** (52gal)	**340 l/min** (90gal)	**465 l/min** (123gal)	**651 l/min** (172gal)	**651 l/min** (172gal)	**897 l/min** (237gal)	**1041 l/min** (275gal)
6.9 bar (100 psi)	6.9 bar (100 psi)	8.3 bar (120 psi)	8.3 bar (120 psi)	8.3 bar (120 psi)	8.3 bar (120 psi)	8.3 bar (120 psi)	8.3 bar (120 psi)	8.3 bar (120 psi)	8.3 bar (120 psi)
1/2″ NPT 1/2″ BSP	3/4″ NPT 3/4″ BSP	1″ NPT 1″ BSP	1″ NPT 1″ BSP	1 1/2″ NPT 1 1/2″ BSP	1 1/2″ NPT 1 1/2″ BSP 1 1/2″ ANSI/DIN	2″ NPT 2″ BSP	2″ NPT 2″ BSP 2″ ANSI/DIN	3″ NPT 3″ BSP	3″ NPT 3″ BSP
1/2″ NPT 1/2″ BSP	3/4″ NPT 3/4″ BSP	1″ NPT 1″ BSP	1″ NPT 1″ BSP	1 1/2″ NPT 1 1/2″ BSP	1 1/2″ NPT 1 1/2″ BSP 1 1/2″ ANSI/DIN	2″ NPT 2″ BSP	2″ NPT 2″ BSP 2″ ANSI/DIN	3″ NPT 3″ BSP	3″ NPT 3″ BSP
Aluminium Stainless steel	Aluminium	Aluminium Cast iron Stainless steel	Aluminium Cast iron Stainless steel Hastelloy	Aluminium Cast iron Stainless steel	Aluminium Cast iron Stainless steel Hastelloy	Aluminium Cast iron Stainless steel	Aluminium Cast iron Stainless steel Hastelloy	Aluminium Cast iron Stainless steel	Aluminium Cast iron Stainless steel Hastelloy
2.4 mm (.09in)	2.4 mm (.09in)	3.2 mm (.12in)	3.3 mm (.12in)	6.4 mm (.25in)	6.4 mm (.25in)	6.4 mm (.25in)	6.4 mm (.25in)	9.5 mm (.37in)	9.5 mm (.37in)
All models	*All models*	*All models*	*With aluminium or stainless steel motor*	*All models*	*With aluminium or stainless steel motor*	*All models*	*With aluminium or stainless steel motor*	*All models*	*With aluminium or stainless steel motor*