


项目号/NO.	零件号/Part No.	名称/Name	规格/Spec.	长度/Length	材质/Material	数量/Qty.	备注/Remark
1	QZ1-3050	驱动立柱1/Driving post 1	W8*10	3050	S355JR	1	

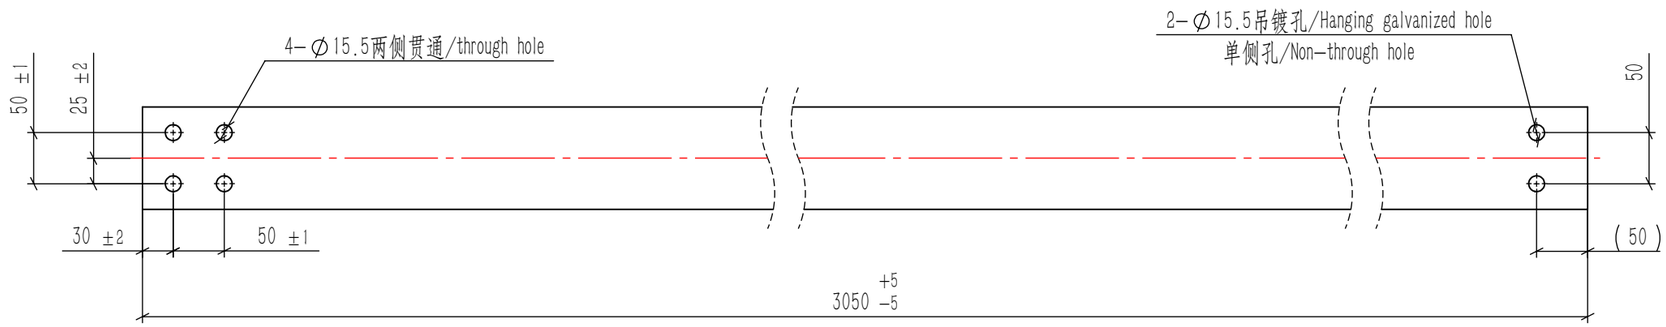



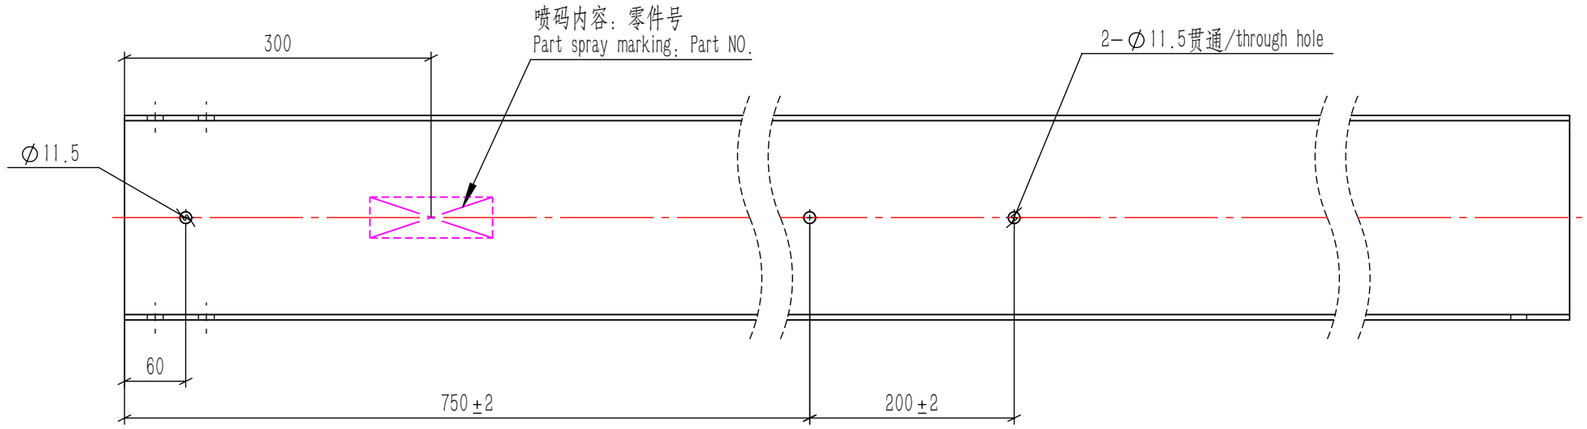

技术要求/Technical requirements：

1.表面处理：热镀锌，锌层厚度详见BOM清单/Surface treatment：Hot-dip galvanized,coating thickness is shown in the BOM；

2.镀锌前去毛刺，飞边/Deburring and fringing before galvanizing；

3.孔径平整，无毛刺飞边/Hole diameter is flat, no burrs and fringes；

4.未注黑件厚度公差：ASTM A6/Unannotated black parts thickness tolerance：ASTM A6；

5.未注零件尺寸公差：ISO 2768/Unannotated dimensional tolerances of parts：ISO 2768-c.


The limit deviation value of the linear dimension						
Grade of Tolerance	Basic dimension segmentation (mm)					
	>0.5-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000
Ra C	±0.5	±0.8	±1.2	±2	±3	±4
No tolerance Angle is indicated：±1°						


ESET SOLAR
Jiangsu Evershine Energy Technology Co.,Ltd.
Xuzhou Economic Development ZoneJiangsu, China,221131.
Tel:+86 516 83152187 Fax:+86 516 83152197
Website:www.jseset.com


Project Number: SP26003	Project Name: ITA Solar Tracking Project	Part Name: 驱动立柱1/Driving post 1	Approved		Design			
			Audit		Drawing	张成立	5	
This drawing must not be copied or reproduced in any form or used or reproduced in any form or used for any purpose other than originally intended without written originally intended without written approval of ESET.	Product Title ESEEK	Rawing NO. ITA-09	Proofreader		DATE		4	
			SCALE	1:6	PAGE	09	3	
							2	
							1	

This drawing must not be copied or reproduced in any form or used or reproduced in any form or used for any purpose other than originally intended without written originally intended without written approval of ESET.

项目号/NO.	零件号/Part No.	名称/Name	规格/Spec.	长度/Length	材质/Material	数量/Qty.	备注/Remark
1	QZ2-3034	驱动立柱2/Driving post 2	W8*13	3034	S355JR	1	

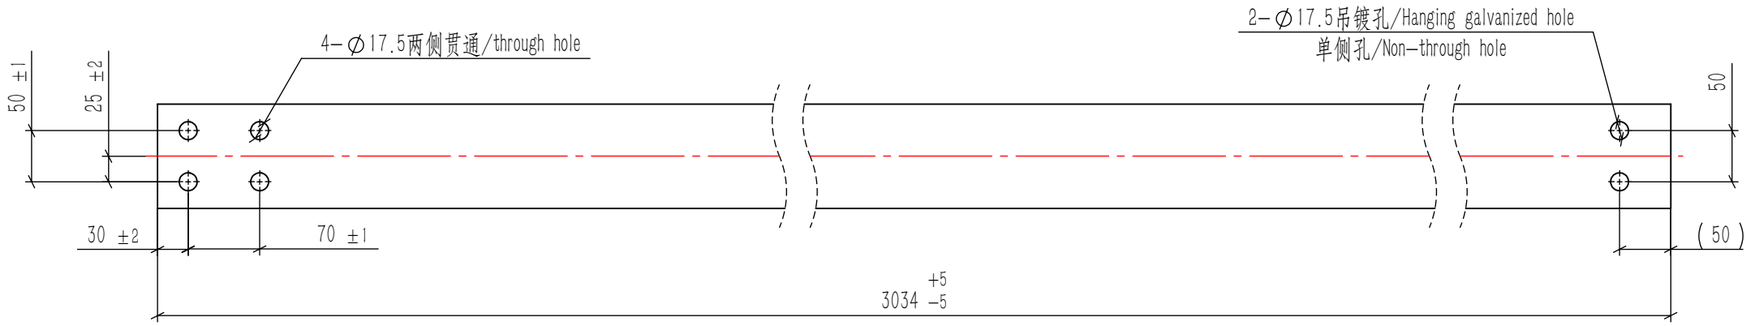



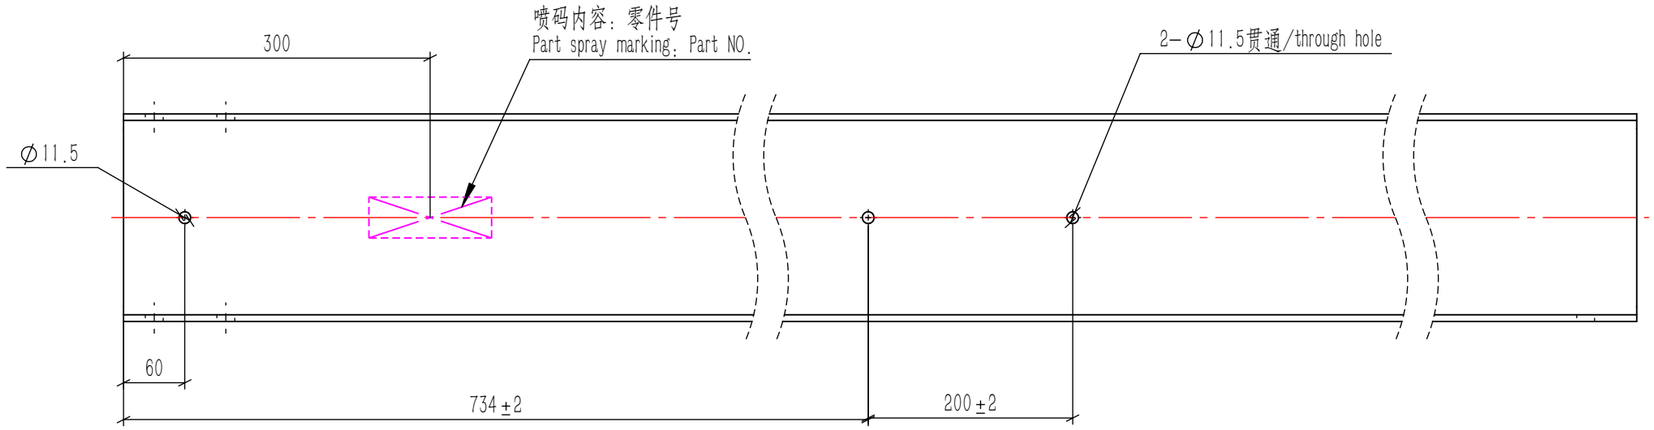

技术要求/Technical requirements:

1.表面处理：热镀锌，锌层厚度详见BOM清单/Surface treatment: Hot-dip galvanized,coating thickness is shown in the BOM;

2.镀锌前去毛刺，飞边/Deburring and fringing before galvanizing;

3.孔径平整，无毛刺飞边/Hole diameter is flat, no burrs and fringes;

4.未注黑件厚度公差：ASTM A6/Unannotated black parts thickness tolerance: ASTM A6;

5.未注零件尺寸公差：ISO 2768/Unannotated dimensional tolerances of parts: ISO 2768-c.


The limit deviation value of the linear dimension						
Grade of Tolerance	Basic dimension segmentation (mm)					
	>0.5-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000
Ra C	±0.5	±0.8	±1.2	±2	±3	±4
No tolerance Angle is indicated: ±1°						


ESET SOLAR
Jiangsu Evershine Energy Technology Co.,Ltd.
Xuzhou Economic Development ZoneJiangsu, China,221131.
Tel:+86 516 83152187 Fax:+86 516 83152197
Website:www.jseset.com


Project Number: SP26003	Project Name: ITA Solar Tracking Project	Part Name: 驱动立柱2/Driving post 2	Approved		Design			
			Audit		Drawing	张成立		
This drawing must not be copied or reproduced in any form or used or reproduced in any form or used for any purpose other than originally intended without written originally intended without written approval of ESET.	Product Title ESEEK	Rawing NO. ITA-10	Proofreader		DATE			
			SCALE	1:6	PAGE	10		

5		
4		
3		
2		
1		

项目号/NO.	零件号/Part No.	名称/Name	规格/Spec.	长度/Length	材质/Material	数量/Qty.	备注/Remark
1	QZ3-3024	驱动立柱3/Driving post 3	W8*15	3024	S355JR	1	

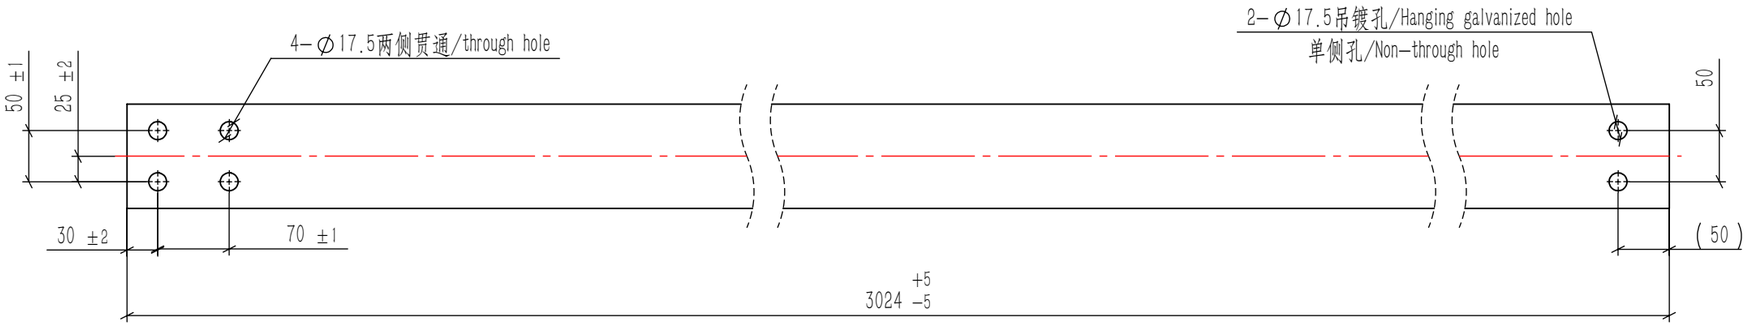



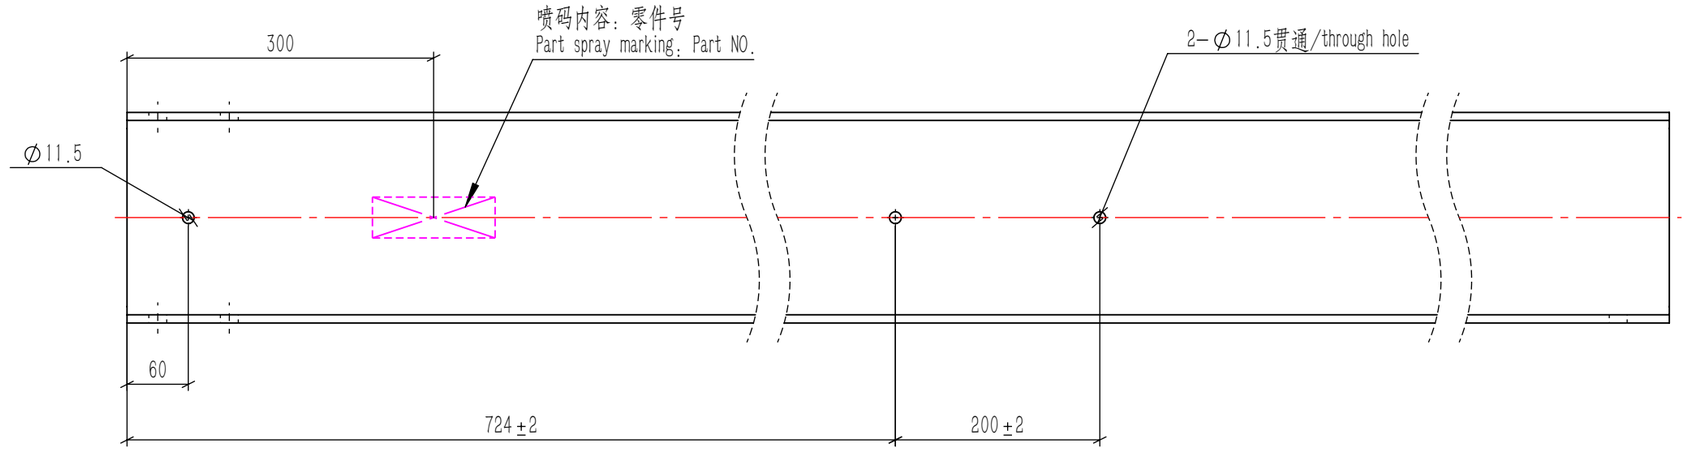

技术要求/Technical requirements：

1.表面处理：热镀锌，锌层厚度详见BOM清单/Surface treatment：Hot-dip galvanized,coating thickness is shown in the BOM；

2.镀锌前去毛刺，飞边/Deburring and fringing before galvanizing；

3.孔径平整，无毛刺飞边/Hole diameter is flat, no burrs and fringes；

4.未注黑件厚度公差：ASTM A6/Unannotated black parts thickness tolerance：ASTM A6；

5.未注零件尺寸公差：ISO 2768/Unannotated dimensional tolerances of parts：ISO 2768-c.


The limit deviation value of the linear dimension						
Grade of Tolerance	Basic dimension segmentation (mm)					
	>0.5-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000
Ra C	±0.5	±0.8	±1.2	±2	±3	±4
No tolerance Angle is indicated：±1°						


ESET SOLAR
Jiangsu Evershine Energy Technology Co.,Ltd.
Xuzhou Economic Development ZoneJiangsu, China,221131.
Tel:+86 516 83152187 Fax:+86 516 83152197
Website:www.jseset.com


This drawing must not be copied or reproduced in any form or used or reproduced in any form or used for any purpose other than originally intended without written originally intended without written approval of ESET.

Project Number: SP26003	Project Name: ITA Solar Tracking Project	Part Name: 驱动立柱3/Driving post 3	Approved		Design		5	
			Audit		Drawing	张成立	4	
	Product Title ESEEK	Rawing NO. ITA-11	Proofreader		DATE		3	
			SCALE	1:6	PAGE	11	2	
							1	

项目号/NO.	零件号/Part No.	名称/Name	规格/Spec.	长度/Length	材质/Material	数量/Qty.	备注/Remark
1	QZ4-3050	驱动立柱4/Driving post 4	W8*13	3050	S355JR	1	

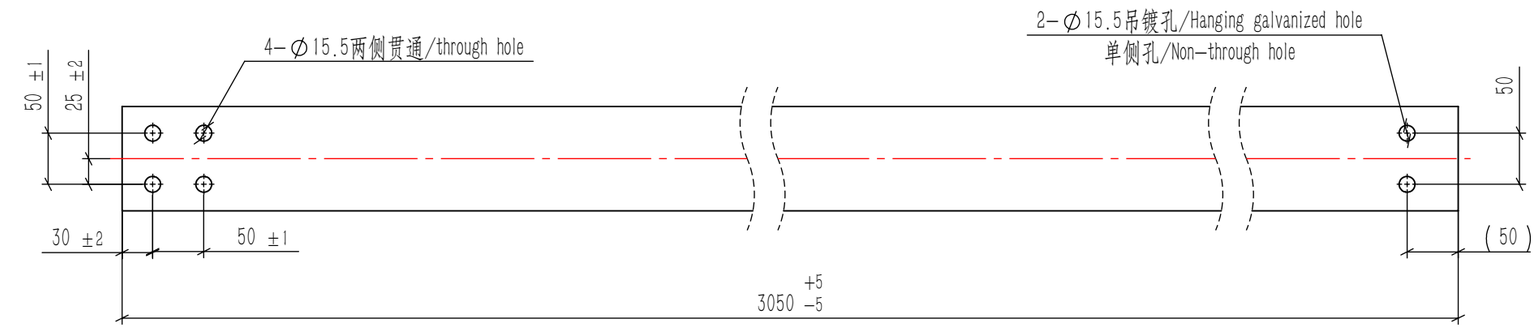



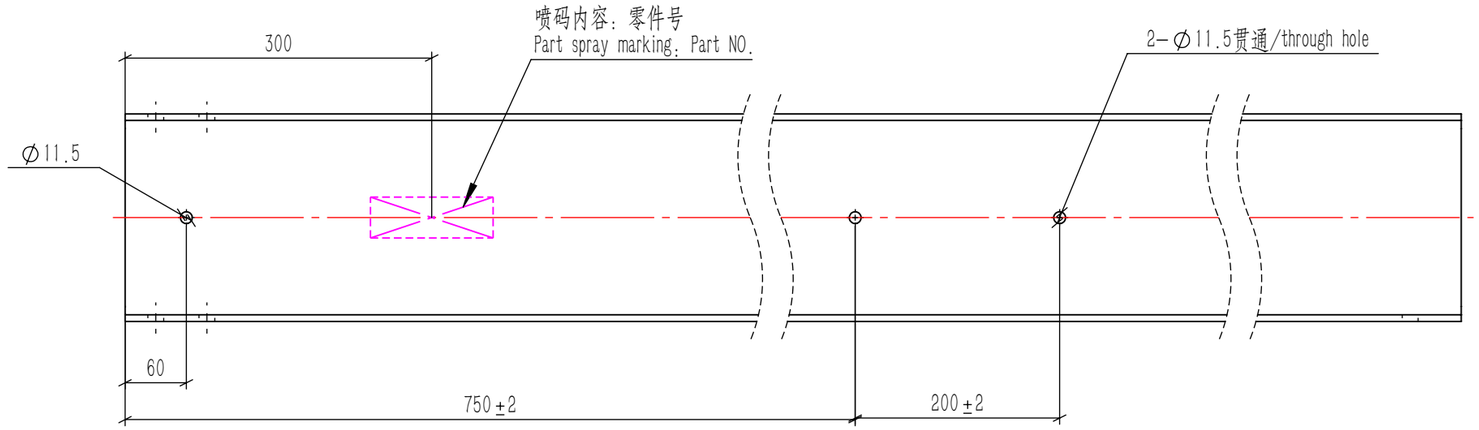

技术要求/Technical requirements:

1.表面处理：热镀锌，锌层厚度详见BOM清单/Surface treatment: Hot-dip galvanized,coating thickness is shown in the BOM;

2.镀锌前去毛刺，飞边/Deburring and fringing before galvanizing;

3.孔径平整，无毛刺飞边/Hole diameter is flat, no burrs and fringes;

4.未注黑件厚度公差：ASTM A6/Unannotated black parts thickness tolerance: ASTM A6;


5.未注零件尺寸公差：ISO 2768/Unannotated dimensional tolerances of parts: ISO 2768-c.


The limit deviation value of the linear dimension						
Grade of Tolerance	Basic dimension segmentation (mm)					
	>0.5-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000
Ra C	±0.5	±0.8	±1.2	±2	±3	±4
No tolerance Angle is indicated: ±1°						


ESET SOLAR
Jiangsu Evershine Energy Technology Co.,Ltd.
Xuzhou Economic Development ZoneJiangsu, China,221131.
Tel:+86 516 83152187 Fax:+86 516 83152197
Website:www.jseset.com

Project Number: SP26003	Project Name: ITA Solar Tracking Project	Part Name: 驱动立柱4/Driving post 4	Approved		Design			
			Audit		Drawing	张成立	5	
This drawing must not be copied or reproduced in any form or used for any purpose other than originally intended without written originally intended without written approval of ESET.	Product Title: ESEEK	Rawing NO.: ITA-12	Proofreader		DATE		4	
							3	
			SCALE	1:6	PAGE	12	2	
							1	

项目号/NO.	零件号/Part No.	名称/Name	规格/Spec.	长度/Length	材质/Material	数量/Qty.	备注/Remark
1	FZ1-3096	非驱动立柱1/Non-Driving post 1	W8*10	3096	S355JR	1	

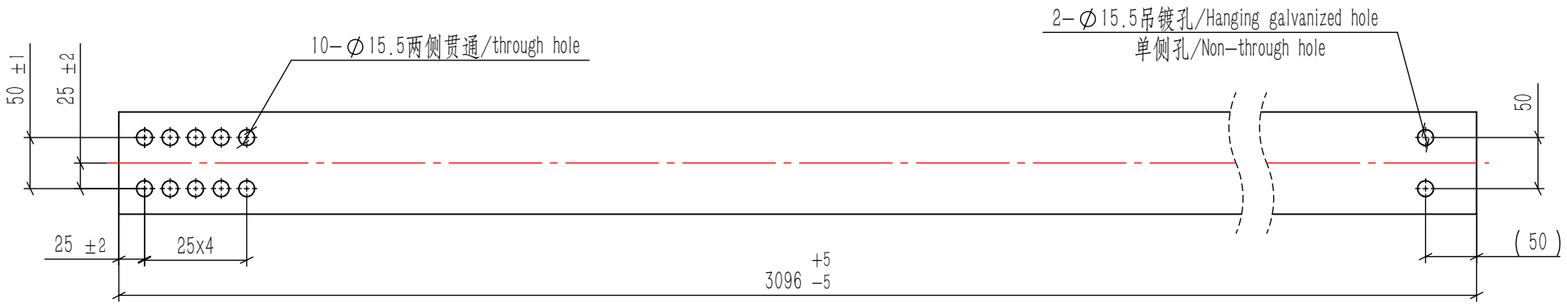



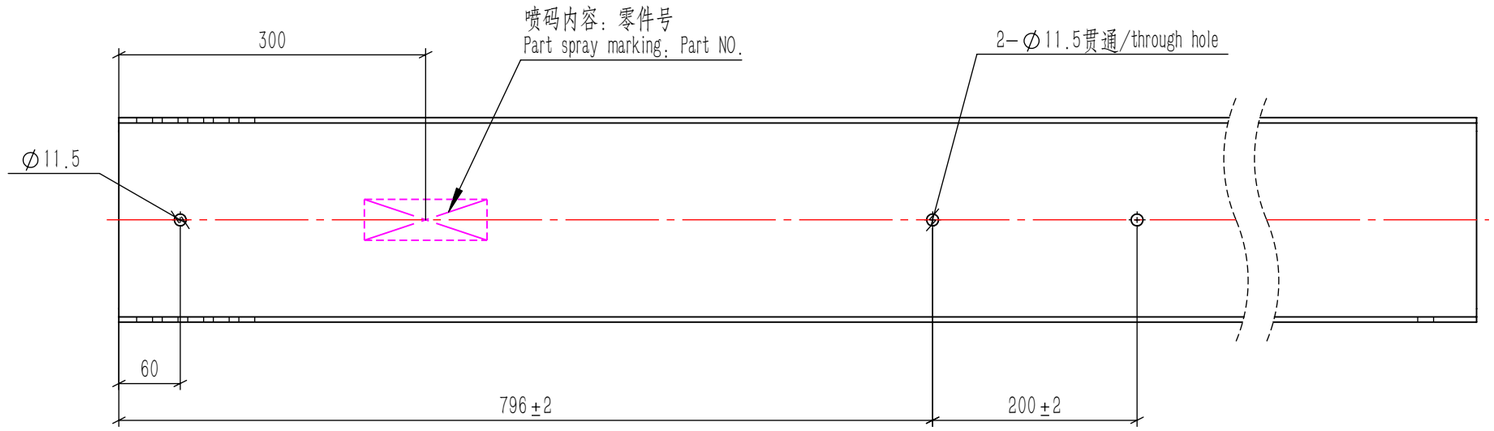

技术要求/Technical requirements：

1.表面处理：热镀锌，锌层厚度详见BOM清单/Surface treatment：Hot-dip galvanized,coating thickness is shown in the BOM；

2.镀锌前去毛刺，飞边/Deburring and fringing before galvanizing；

3.孔径平整，无毛刺飞边/Hole diameter is flat, no burrs and fringes；

4.未注黑件厚度公差：ASTM A6/Unannotated black parts thickness tolerance：ASTM A6；

5.未注零件尺寸公差：ISO 2768/Unannotated dimensional tolerances of parts：ISO 2768-c.


The limit deviation value of the linear dimension						
Grade of Tolerance	Basic dimension segmentation (mm)					
	>0.5-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000
Ra C	±0.5	±0.8	±1.2	±2	±3	±4
No tolerance Angle is indicated: ±1°						


ESET SOLAR
Jiangsu Evershine Energy Technology Co.,Ltd.
Xuzhou Economic Development ZoneJiangsu, China,221131.
Tel:+86 516 83152187 Fax:+86 516 83152197
Website:www.jseset.com


This drawing must not be copied or reproduced in any form or used or reproduced in any form or used for any purpose other than originally intended without written originally intended without written approval of ESET.

Project Number: SP26003	Project Name: ITA Solar Tracking Project	Part Name: 非驱动立柱1/Non-driving post1	Approved		Design			
			Audit		Drawing	张成立	5	
	Product Title ESEEK	Rawing NO. ITA-14	Proofreader		DATE		4	
			SCALE	1:6	PAGE	14	3	
							2	
							1	

项目号/NO.	零件号/Part No.	名称/Name	规格/Spec.	长度/Length	材质/Material	数量/Qty.	备注/Remark
1	FZ2-3096	非驱动立柱2/Non-Driving post 2	W8*13	3096	S355JR	1	

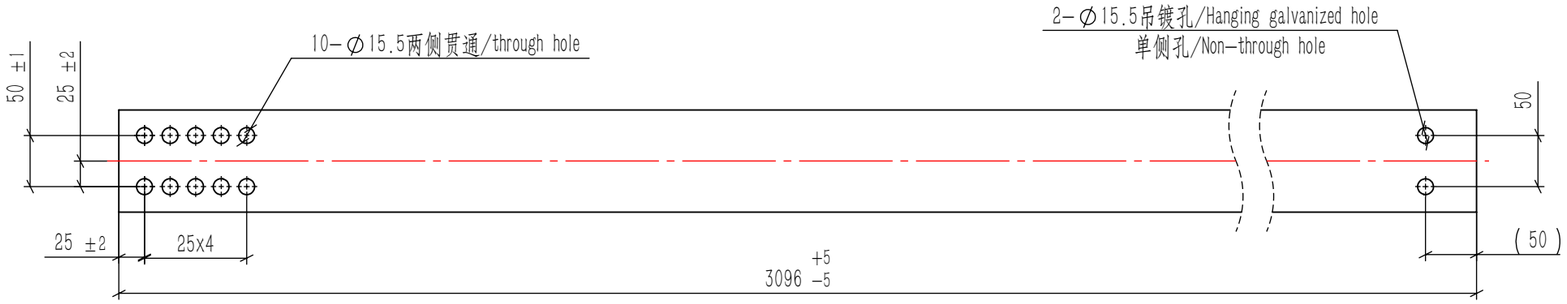



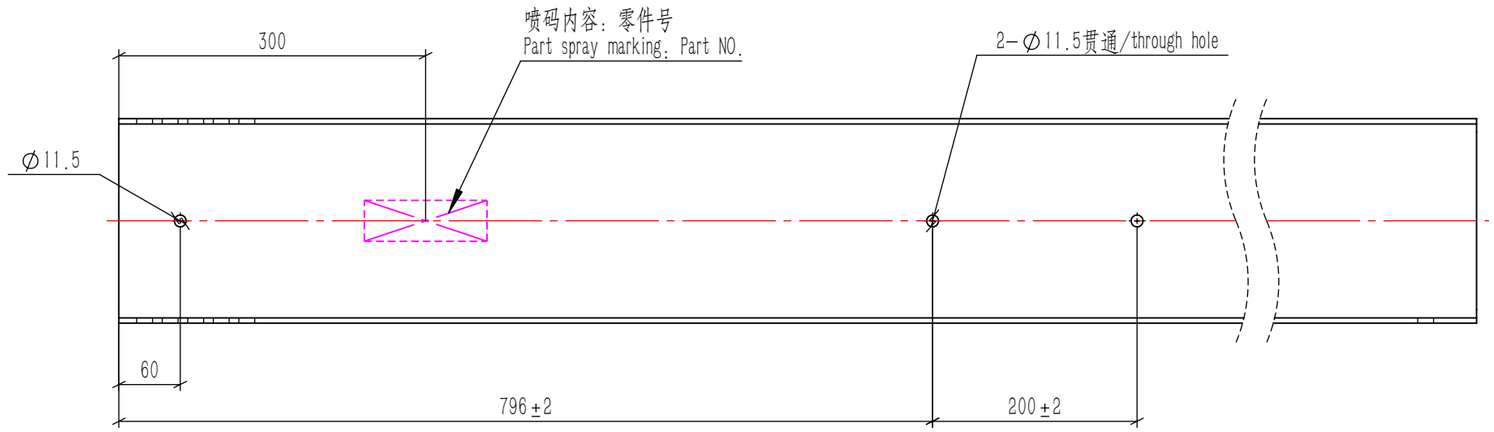

技术要求/Technical requirements:

1.表面处理：热镀锌，锌层厚度详见BOM清单/Surface treatment: Hot-dip galvanized,coating thickness is shown in the BOM;

2.镀锌前去毛刺，飞边/Deburring and fringing before galvanizing;

3.孔径平整，无毛刺飞边/Hole diameter is flat, no burrs and fringes;

4.未注黑件厚度公差：ASTM A6/Unannotated black parts thickness tolerance: ASTM A6;

5.未注零件尺寸公差：ISO 2768/Unannotated dimensional tolerances of parts: ISO 2768-c.


The limit deviation value of the linear dimension						
Grade of Tolerance	Basic dimension segmentation (mm)					
	>0.5-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000
Ra C	±0.5	±0.8	±1.2	±2	±3	±4
No tolerance Angle is indicated: ±1°						


ESET SOLAR
Jiangsu Evershine Energy Technology Co.,Ltd.
Xuzhou Economic Development ZoneJiangsu, China,221131.
Tel:+86 516 83152187 Fax:+86 516 83152197
Website:www.jseset.com

This drawing must not be copied or reproduced in any form or used or reproduced in any form or used for any purpose other than originally intended without written originally intended without written approval of ESET.

Project Number: SP26003	Project Name: ITA Solar Tracking Project	Part Name: 非驱动立柱2/Non-driving post2	Approved		Design			
			Audit		Drawing	张成立	5	
	Product Title ESEEK	Rawing NO. ITA-31	Proofreader		DATE		4	
			SCALE	1:6	PAGE	31	3	
							2	
							1	

项目号	零件号/Part No.	名称/Name	规格/Spec.	长度/Length	材质/Material	数量/Qty.	备注/Remark
1	NZ1-3096	带阻尼器非驱动立柱1/Damper post 1	W8*10	3096	S355JR	1	

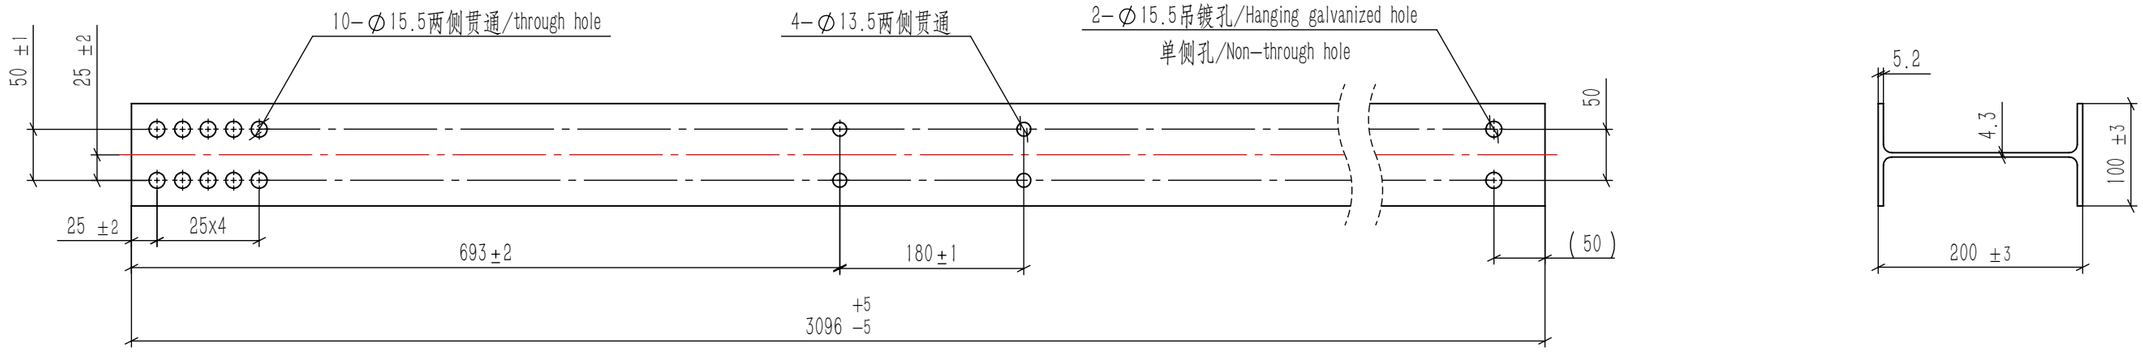

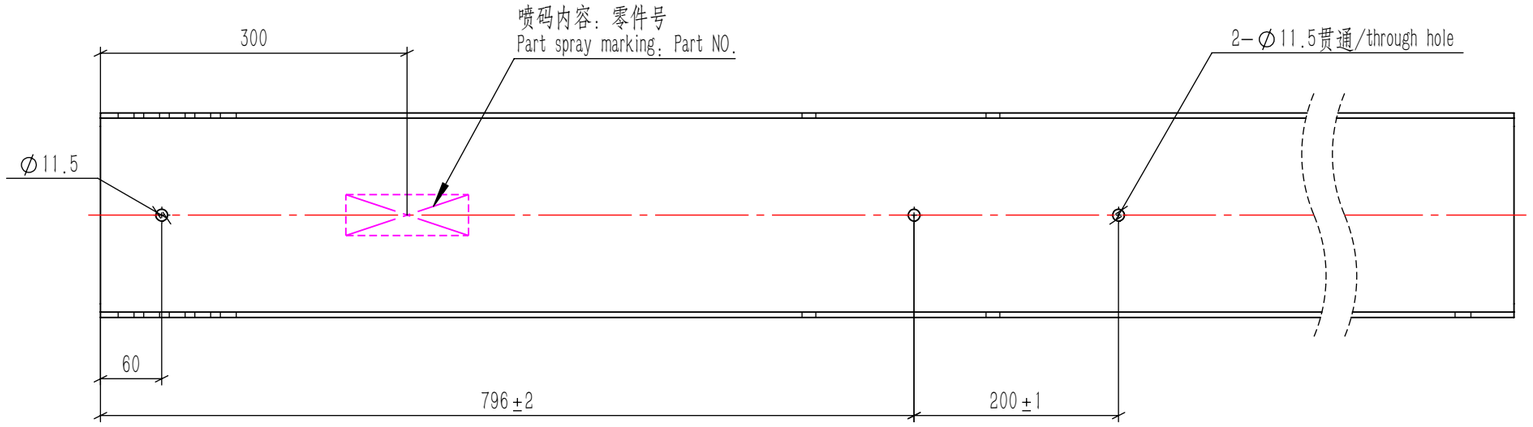

技术要求/Technical requirements：

1.表面处理：热镀锌，锌层厚度详见BOM清单/Surface treatment：Hot-dip galvanized,coating thickness is shown in the BOM；

2.镀锌前去毛刺，飞边/Deburring and fringing before galvanizing；

3.孔径平整，无毛刺飞边/Hole diameter is flat, no burrs and fringes；

4.未注黑件厚度公差：ASTM A6/Unannotated black parts thickness tolerance：ASTM A6；

5.未注零件尺寸公差：ISO 2768/Unannotated dimensional tolerances of parts：ISO 2768-c.

The limit deviation value of the linear dimension						
Grade of Tolerance	Basic dimension segmentation (mm)					
	>0.5-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000
Ra C	±0.5	±0.8	±1.2	±2	±3	±4
No tolerance Angle is indicated：±1°						

ESET SOLAR
Jiangsu Evershine Energy Technology Co.,Ltd.
Xuzhou Economic Development ZoneJiangsu, China,221131.
Tel:+86 516 83152187 Fax:+86 516 83152197
Website:www.jseset.com

This drawing must not be copied or reproduced in any form or used or reproduced in any form or used for any purpose other than originally intended without written originally intended without written approval of ESET.

Project Number: SP26003	Project Name: ITA Solar Tracking Project	Part Name: 带阻尼器非驱动立柱1/Damper post1	Approved		Design		5	
			Audit		Drawing	张成立	4	
Product Title ESEEK		Rawing NO. ITA-16	Proofreader		DATE		3	
			SCALE	1:6	PAGE	06	2	
							1	